



Ningbo Shenghong Communications Equipment Co., Ltd.

Product Specification

Product Name: 2.4GHz Antenna K11 **Specification:** SHZD2400-2U-K11

Company Code: SHSC3.945.04040 **Customer Code:** **Compile:** Li jun

Reviewed: Tonghe

Approved: Panqingsong

File number:

Customer:

Customer affirm:

date: 2023.02.20



2. 4GHz Antenna K11

I . Product Name:

II . Specification:

III. Technical Parameter:

1. Electrical Characteristics

Frequency range:	2400-2483MHz
Polarization:	Vertical
Max Gain:	2. 2dBi
Max VSWR:	≤ 3.8
Impedance:	50 Ω
3dB beam width:	H:360° E:/
Max.Power:	10W
Lighting protection:	DC Ground

(Determined by the sample)

2. Mechanical Characteristics

Input:	U.FL (male)
Cable type:	1.13 or other
Cable length:	195mm
Cable Impedance:	50 Ω
Connector pull-out:	2N





Antenna weight:	about 5g
Radiation material:	copper
Colour:	White (appoint color)

(Determined by the sample)

3. Working Environment:

Temperature: $-30^{\circ}\text{C} \sim +75^{\circ}\text{C}$

Corrosive gas environment: no acidity and no alkalescence in air all around
(contenting other request environment)

IV. Max exterior Dimensions:

L x Φ : about 195mm $\times$ Φ 2.9mm (Determined by the sample)

V. Materiel Introduction:

1. General Situation: This product is Designed according to the particular criterion, This antenna was used to The Wireless public. This antenna's performance is excellent, figuration is handsome, dependability is well.

2. Package & Stock age: This product should be packed in plastic box, and then put into hard carton; each box with a conformity certificate, which is included product P/N, date, checking stamp, company stamp; each box is sticked with product P/N, package quantity. The stockage condition is: $-10^{\circ}\text{C} \sim +40^{\circ}\text{C}$; the compared humidity is 80%; being stored in the room without acidity, alkalescency and causticity in air.

3. Exchange Relationship: U.FL-K

4. technics & use: immediately screw on.

JUNPER INTERCONNECTION CO., LTD,
TECHNOLOGY CENTRE

2022. 12. 01

外形图

07070576CJSHS

The diagram shows a side view of a cable assembly. It consists of a long central section and a connector at one end. The overall length is dimensioned as 195±10. A specific section of the cable has a length of 62±8. The diameter of this section is indicated as 2.9±0.3. The connector at the right end has a diameter of φ1.13±0.2. There are two callout numbers: '1' points to the start of the 62±8 section, and '2' points to the connector.

Technical requirements:
 1.Antenna color: white.
 2.Frequency requirements: 2400-2483MHz.
 3.VSWR: ≤3.8.

number	Code	Name	number	Remarks
3				
2	SHSC6645.8224	UFL Cable assbly	1	φ113,White skin
1	SHSC7.391.04.009	Heat shrinkab tube	1	White

Ningbo Shenghong Communications Equipment									
					Assembly drawing				
					SHZD2400-2U-K11				
					2.4GHz Antenna K11				
Design	Jijun	Quality			Figure like	Mark	Version	V1	
Standard					S	A		Weight	-1
Check					Papes:	/	Proportion		
Assembly		Approval			SHSC3.945.04040				

- Borrow items Code
- Borrow items
- Attachments



The Testing


Appendix 1

The Date

Number	Item type		Requiremengt	Result
1	Frequency		2400-2483MHz	OK
2	Band Width		83MHz	OK
3	Polarization		Vertical	OK
4	Max Gain		2.2dBi	OK
5	Max VSWR		<3.8	2.53
6	Beam width	H	360°	360°
		E	/	/
8	Input		UFL-K	OK




Appendix 2—VSWR

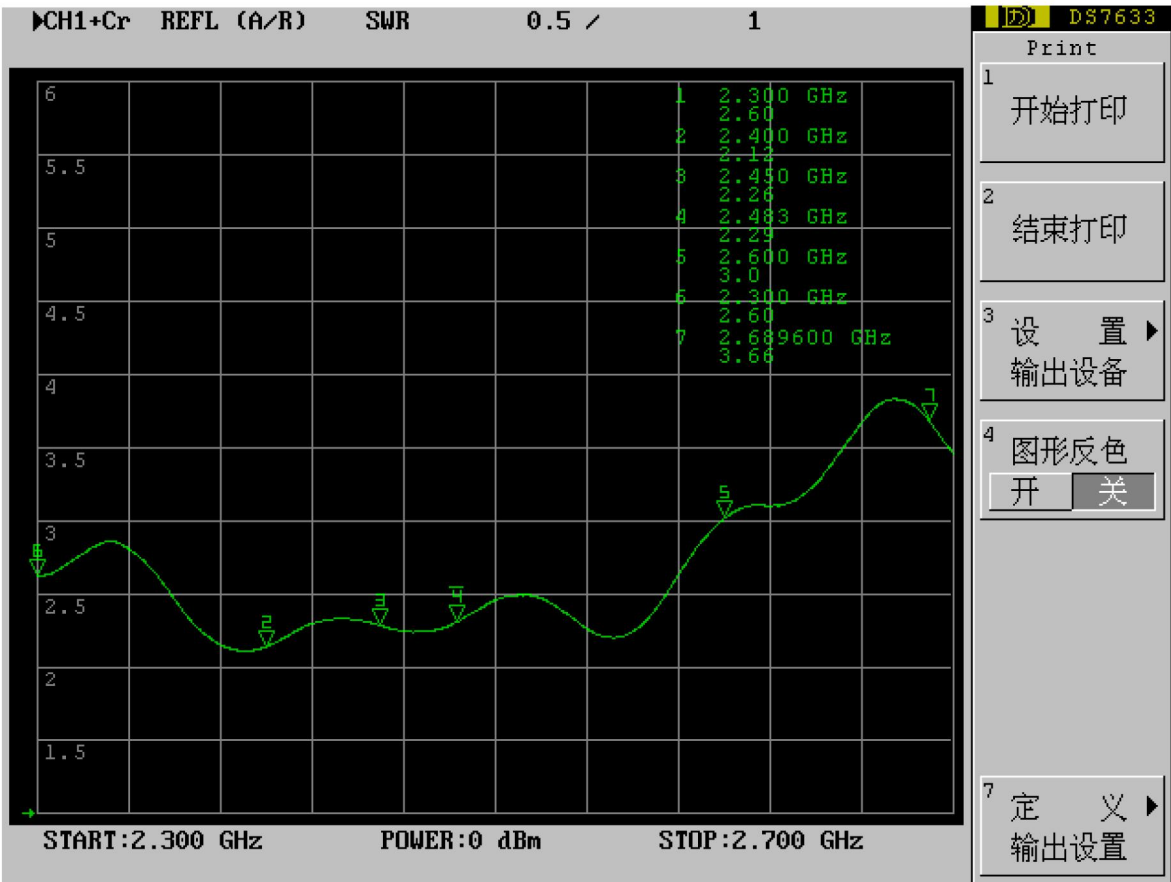


2.4GHz antenna K11 测试数据(SHZD2400-2U-K11 , 长195cm)

Frequency (MHz)	2400	2412	2437	2447	2462	2483
Directivity(dB)	5.8125	5.5863	5.3926	5.3917	5.2936	5.4056
Gain(dB)	2.0258	2.1896	1.9105	2.0268	2.0128	2.2123
Efficiency(dB)	-3.4108	-3.1922	-3.3012	-3.4013	-3.0938	-2.8988
Efficiency(%)	49.6685	50.978	50.2639	49.9218	51.961	52.8652
BW@Phi=0	40.9163	38.313	91.2966	87.7535	84.1497	41.9901
BW@phi=90	30.6546	30.071	29.633	29.5011	30.3416	29.5976
BW@theta=90	51.4605	50.9507	48.5624	47.9251	50.3584	85.689
Roundness@Theta=30	10.4569	11.0814	11.9047	10.8544	8.8121	7.6726
Roundness@Theta=60	7.8943	8.3979	12.1558	13.76	11.9072	13.2063
Roundness@Theta=90	11.1839	11.6223	12.313	12.4054	11.6365	11.5702
Peak Gain@Phi(deg)	46	46	46	46	46	46
Peak Gain@Theta(deg)	-138	-138	-138	-138	-136	-136
Null@Phi(deg)	158	158	158	158	158	158
Null@Theta(deg)	-180	-180	-180	-180	-180	-180
upper spherical efficiency(dB)	-7.9586	-7.5646	-7.4142	-7.51	-7.3554	-7.205
upper spherical efficiency(%)	16.0007	17.5203	18.1374	17.7419	18.3849	19.0329
lower spherical efficiency(dB)	-5.2771	-5.163	-5.3571	-5.505	-5.1462	-5.041
lower spherical efficiency(%)	29.6678	30.4577	29.1265	28.1517	30.5761	31.3255
Efficiency LHCP(dB)	-5.5811	-5.3619	-5.4457	-5.6487	-5.4414	-5.2766
Efficiency LHCP(%)	27.6622	29.0941	28.5385	27.2351	28.5669	29.6717
Efficiency RHCP(dB)	-7.4457	-7.2391	-7.2757	-7.2912	-6.905	-6.8431
Efficiency RHCP(%)	18.0063	18.8839	18.7254	18.6584	20.3941	20.6867
Gain LHCP(dB)	1.4932	1.5134	1.1077	0.8543	1.3555	1.8665
Gain RHCP(dB)	0.7059	0.7246	0.6151	0.6201	1.1648	1.2967
AR	3.0972	3.6988	3.108	2.5461	2.0642	1.9689
AR dB	9.8193	11.3612	9.8497	8.1175	6.2952	5.8846
功率占比 (%)	19.1936	19.8724	20.8928	20.9068	18.9774	18.4875


2.4GHz antenna K11 测试数据 (SHZD2400-2U-K11 , 长195cm)

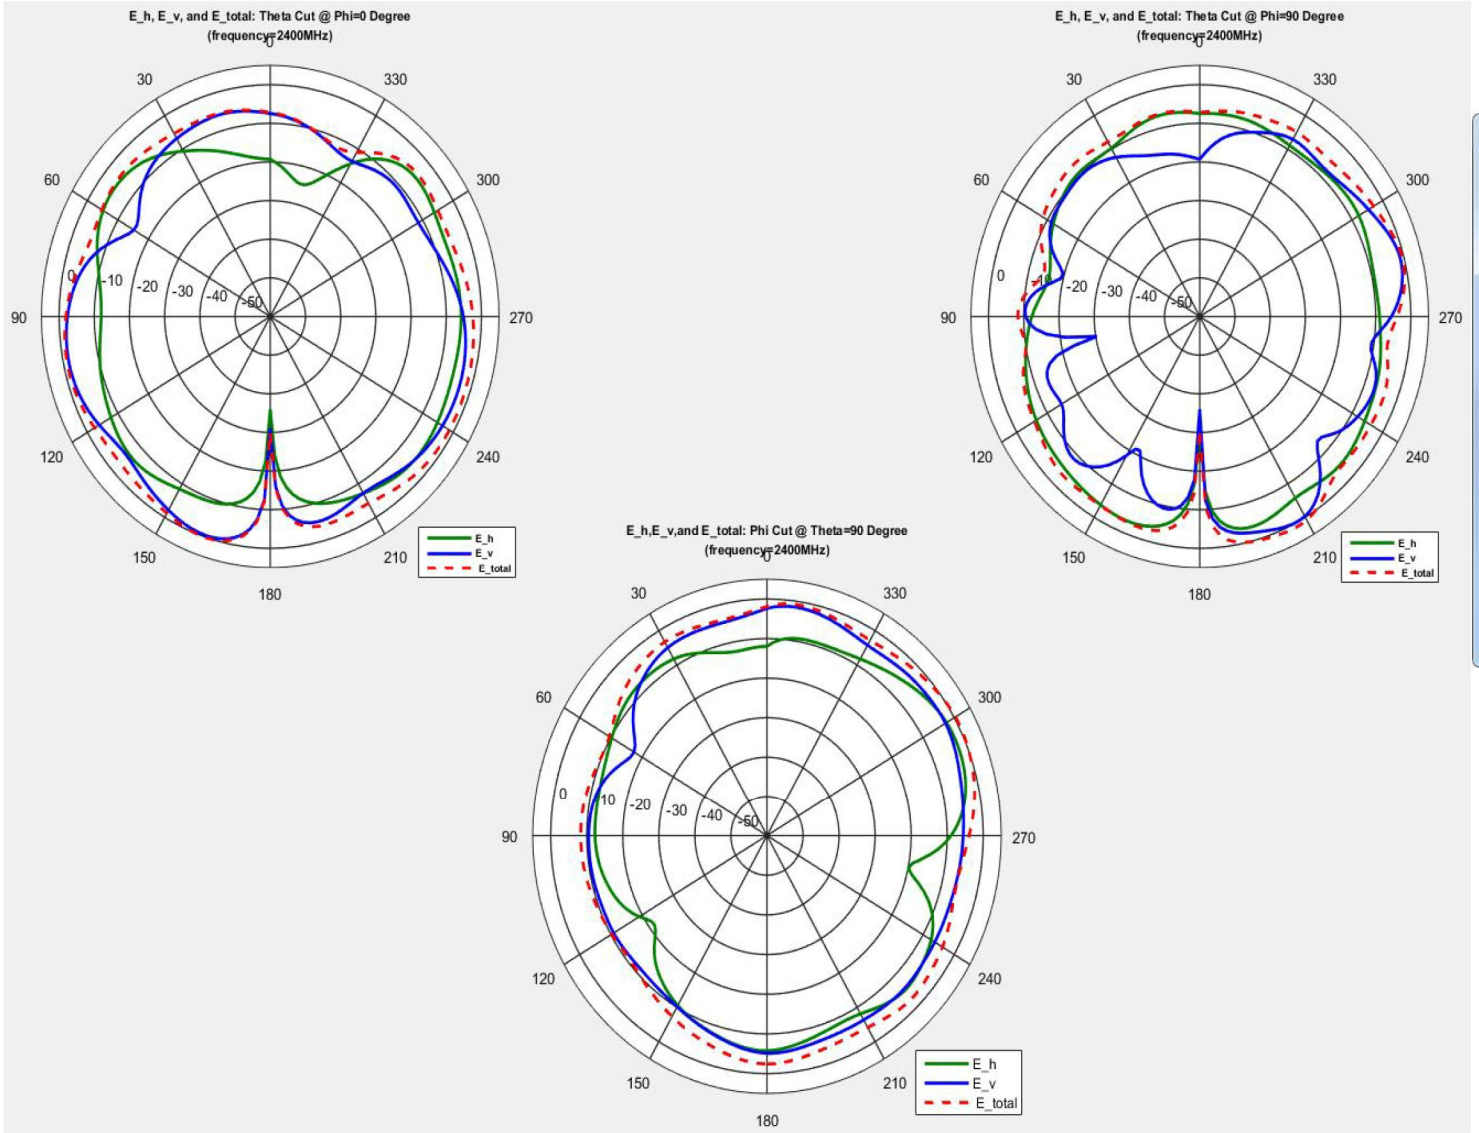


E_h, E_v, and E_{total}: Theta Cut @ Phi=0 Degree
(frequency=2412MHz)

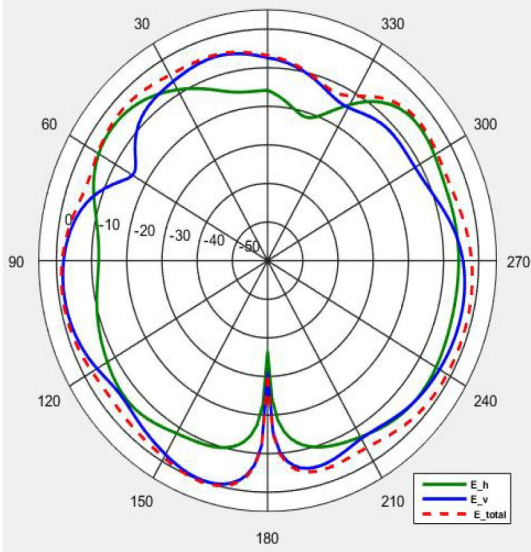


E_h, E_v, and E_{total}: Theta Cut @ Phi=90 Degree
(frequency=2412MHz)

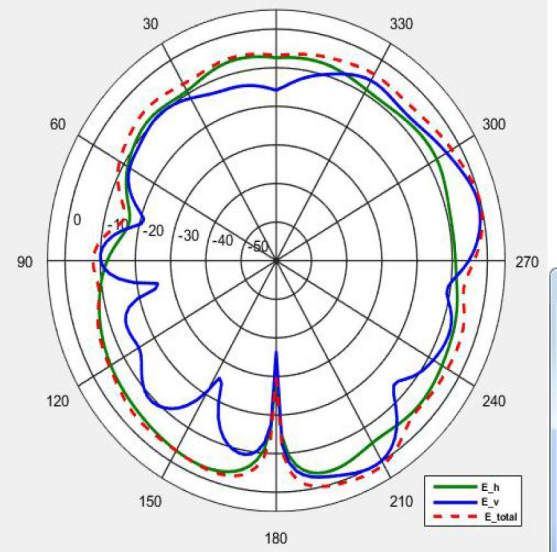


E_h, E_v, and E_{total}: Phi Cut @ Theta=90 Degree
(frequency=2412MHz)

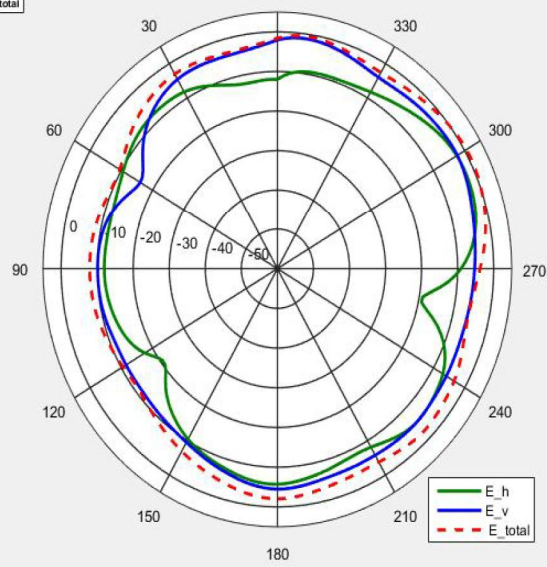


E_h, E_v, and E_{total}: Theta Cut @ Phi=0 Degree
(frequency=2437MHz)

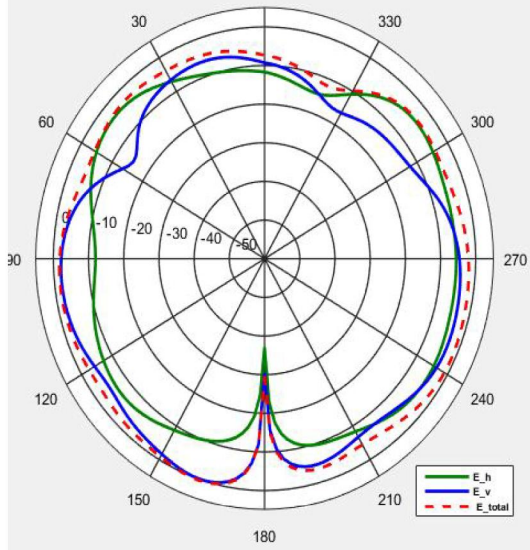

E_h, E_v, and E_{total}: Theta Cut @ Phi=90 Degree
(frequency=2437MHz)

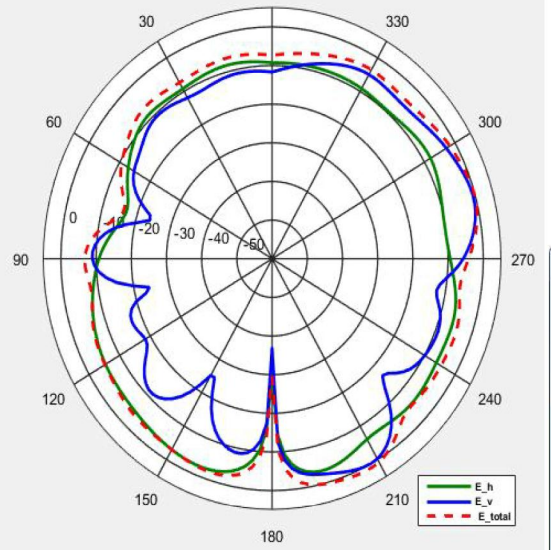


E_h, E_v, and E_{total}: Phi Cut @ Theta=90 Degree
(frequency=2437MHz)

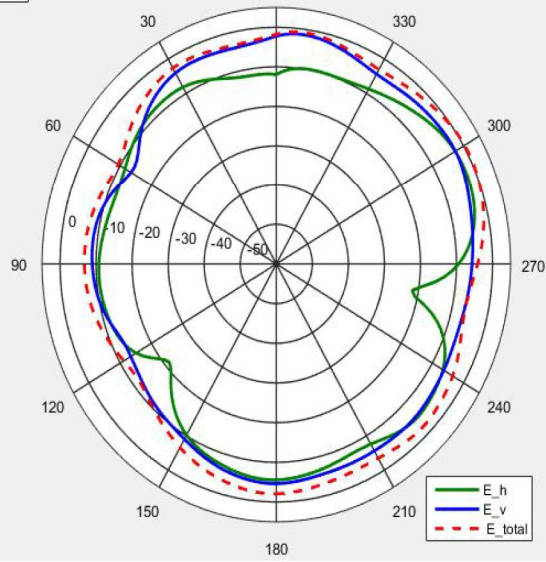


Frequency=


E_h, E_v, and E_total: Theta Cut @ Phi=0 Degree
(frequency=2447MHz)

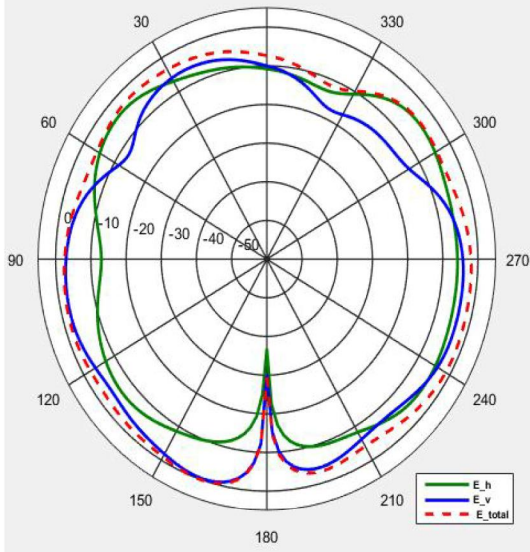


E_h, E_v, and E_total: Theta Cut @ Phi=90 Degree
(frequency=2447MHz)

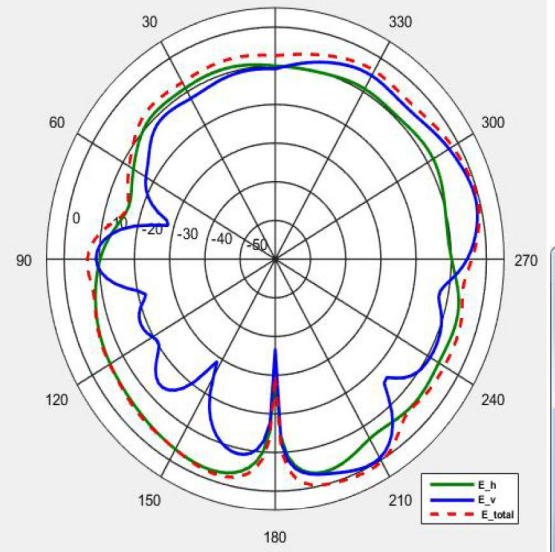


E_h, E_v, and E_total: Phi Cut @ Theta=90 Degree
(frequency=2447MHz)

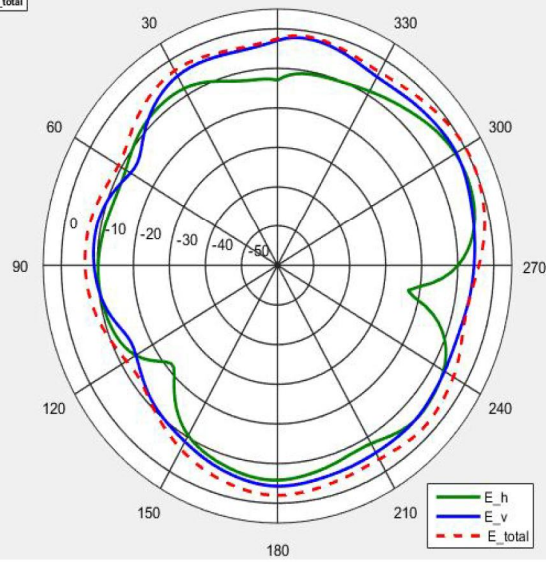


E_h, E_v, and E_{total}: Theta Cut @ Phi=0 Degree
(frequency=2462MHz)



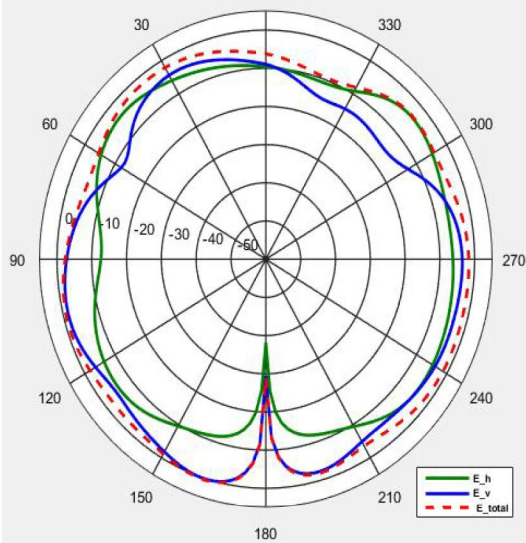


E_h, E_v, and E_{total}: Theta Cut @ Phi=90 Degree
(frequency=2462MHz)

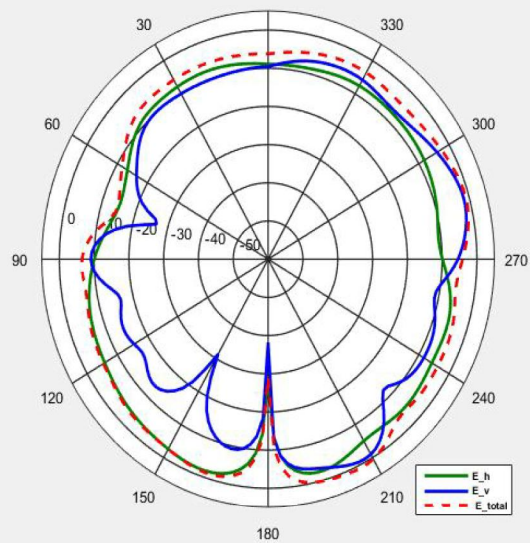

E_h, E_v, and E_{total}: Phi Cut @ Theta=90 Degree
(frequency=2462MHz)

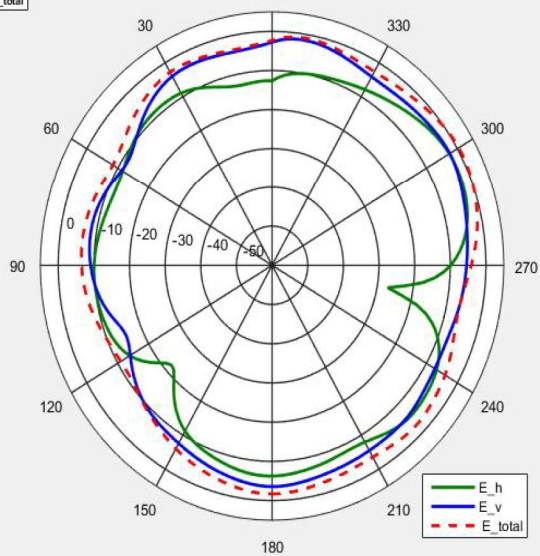

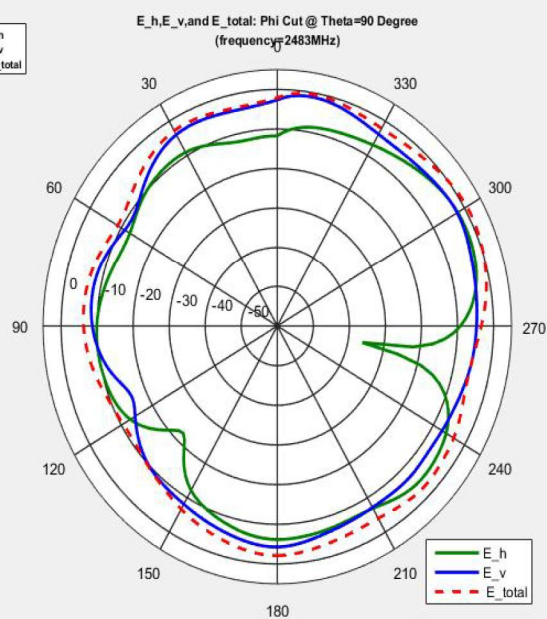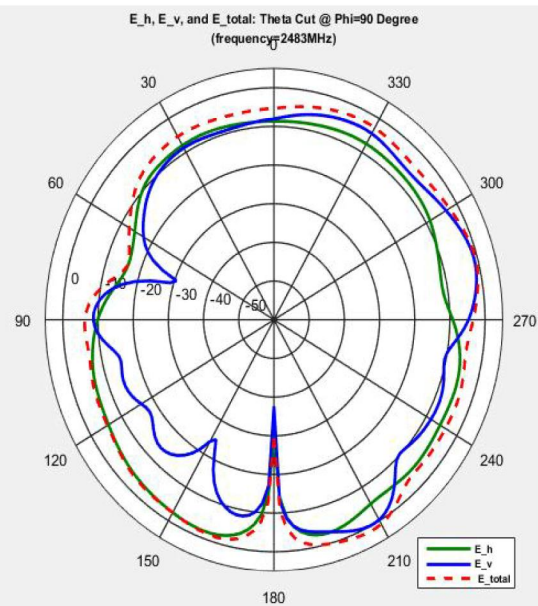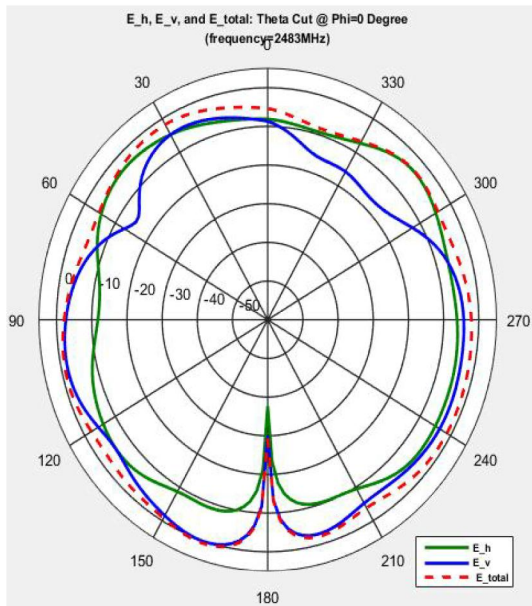

Frequency=