

FCC REPORT

Applicant: Nexpro International Limitada

Address of Applicant: Guadalupe, Barrio Tournon, Frente Al Hotel Villas Oficinas Del Bufete Facio Y Canas

Equipment Under Test (EUT)

Product Name: LTE mobile phone

Model No.: SAVVY

FCC ID: ZYPSAVVY

Applicable standards: FCC CFR Title 47 Part 2
FCC CFR Title 47 Part22 Subpart H
FCC CFR Title 47 Part24 Subpart E

Date of sample receipt: 01 Apr., 2015

Date of Test: 01 Apr., to 22 May 2015

Date of report issued: 22 May 2015

Test Result: PASS *

* In the configuration tested, the EUT complied with the standards specified above.

Authorized Signature:



Bruce Zhang
Laboratory Manager

This report details the results of the testing carried out on one sample. The results contained in this test report do not relate to other samples of the same product and does not permit the use of the CCIS product certification mark. The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report.

This report may only be reproduced and distributed in full. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards.

This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

2. Version

Version No.	Date	Description
00	22 May 2015	Original

Prepared by:

Sera Xiang
Report Clerk

Date:

22 May 2015

Reviewed by:

Wim Zhang
Project Engineer

Date:

22 May 2015

3. Contents

	Page
1. COVER PAGE	1
2. VERSION.....	2
3. CONTENTS.....	3
4. TEST SUMMARY.....	4
5. GENERAL INFORMATION	5
5.1 CLIENT INFORMATION.....	5
5.2 GENERAL DESCRIPTION OF E.U.T.....	5
5.3 TEST MODES.....	8
5.4 RELATED SUBMITTAL(S) / GRANT (S).....	8
5.5 TEST METHODOLOGY.....	8
5.6 LABORATORY FACILITY.....	8
5.7 LABORATORY LOCATION	8
5.8 TEST INSTRUMENTS LIST.....	9
6. SYSTEM TEST CONFIGURATION	10
6.1 EUT CONFIGURATION	10
6.2 EUT EXERCISE.....	10
6.3 CONFIGURATION OF TESTED SYSTEM	10
6.4 DESCRIPTION OF TEST MODES.....	10
6.5 CONDUCTED OUTPUT POWER	11
6.6 OCCUPY BANDWIDTH	16
6.7 PEAK-TO-AVERAGE RATIO	30
6.8 MODULATION CHARACTERISTIC.....	36
6.9 OUT OF BAND EMISSION AT ANTENNA TERMINALS	36
6.10 ERP, EIRP MEASUREMENT	49
6.11 FIELD STRENGTH OF SPURIOUS RADIATION MEASUREMENT.....	53
6.12 FREQUENCY STABILITY V.S. TEMPERATURE MEASUREMENT	59
6.13 FREQUENCY STABILITY V.S. VOLTAGE MEASUREMENT	63
7 TEST SETUP PHOTO.....	66
8 EUT CONSTRUCTIONAL DETAILS	67

4. Test Summary

Test Item	Section in CFR 47	Result
RF Exposure (SAR)	Part 1.1307 Part 2.1093	Passed* (Please refer to SAR Report)
RF Output Power	Part 2.1046 Part 22.913 (a)(2) Part 24.232 (c)	Pass
Modulation Characteristics	Part 2.1047	Pass
99% & -26 dB Occupied Bandwidth	Part 2.1049 Part 22.917 Part 24.238	Pass
Spurious Emissions at Antenna Terminal	Part 2.1051 Part 22.917 (a) Part 24.238 (a)	Pass
Field Strength of Spurious Radiation	Part 2.1053 Part 22.917 (a) Part 24.238 (a)	Pass
Out of band emission, Band Edge	Part 22.917 (a) Part 24.238 (a)	Pass
Frequency stability vs. temperature	Part 2.1055(a)(1)(b)	Pass
Frequency stability vs. voltage	Part 2.1055(d)(1)(2)	Pass

Pass: The EUT complies with the essential requirements in the standard.

5. General Information

5.1 Client Information

Applicant:	Nexpro International Limitada
Address of Applicant:	Guadalupe, Barrio Tournon, Frente Al Hotel Villas Oficinas Del Bufete Facio Y Canas
Manufacturer:	Shenzhen Malata Mobile Communication Co.,LTD.
Address of Manufacturer:	25/F, Malata Technology Building, NO.9998 Shennan Avenue, Shenzhen, P.R. China

5.2 General Description of E.U.T.

Product Name:	LTE mobile phone
Model No.:	SAVVY
Operation Frequency range:	GSM 850: 824.20MHz-848.80MHz PCS1900: 1850.20MHz-1909.80MHz WCDMA Band V:826.4MHz-846.6MHz WCDMA Band II:1852.4 MHz -1907.6 MHz
Modulation type:	GSM/GPRS:GMSK, UMTS:QPSK, EGPRS: 8PSK
Antenna type:	Integral Antenna
Antenna gain:	GSM 850: -1.09 dBi PCS 1900: 0.51dBi WCDMA 850: -1.19dBi WCDMA 1900: 0.74dBi
AC adapter:	Input:100-240V AC,50/60Hz 0.15A Output:5V DC MAX 1A
Power supply:	Rechargeable Li-ion Battery DC3.8V-2200mAh

Operation Frequency List:

GSM 850		PCS1900	
Channel:	Frequency (MHz)	Channel:	Frequency (MHz)
128	824.20	512	1850.20
129	824.40	513	1850.40
....			
189	836.40	660	1879.80
190	836.60	661	1880.00
191	836.80	662	1880.20
...	...	...	...
250	848.60	809	1909.60
251	848.80	810	1909.80
WCDMA Band V		WCDMA Band II	
Channel:	Frequency (MHz)	Channel:	Frequency (MHz)
4132	826.40	9262	1852.40
4133	826.60	9263	1852.60
....			
4182	836.40	9399	1879.80
4183	836.60	9400	1880.00
4184	836.80	9401	1880.20
...	...	...	...
4232	846.40	9537	1907.40
4233	846.60	9538	1907.60

Regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

GSM850			PCS1900		
	Channel	Frequency(MHz)		Channel	Frequency(MHz)
Lowest channel	128	824.20	Lowest channel	512	1850.20
Middle channel	190	836.60	Middle channel	661	1880.00
Highest channel	251	848.80	Highest channel	810	1909.80
WCDMA Band V			WCDMA Band II		
	Channel	Frequency(MHz)		Channel	Frequency(MHz)
Lowest channel	4132	826.40	Lowest channel	9262	1852.40
Middle channel	4183	836.60	Middle channel	9400	1880.00
Highest channel	4233	846.60	Highest channel	9538	1907.60

5.3 Test modes

Communicate mode (GSM850)	Keep the EUT in communicating mode on GSM 850 band.
Data mode (GPRS850)	Keep the EUT in data communicating mode on GPRS 850 band.
Data mode (EGPRS850)	Keep the EUT in data communicating mode on EGPRS 850 band.
Communicate mode (PCS1900)	Keep the EUT in communicating mode on PCS1900 band.
Data mode (GPRS1900)	Keep the EUT in data communicating mode on GPRS1900 band.
Data mode (EGPRS1900)	Keep the EUT in data communicating mode on EGPRS1900 band.
Communicate mode (UMTS 850)	Keep the EUT in communicating mode on UMTS 850 band.
Communicate mode (UMTS 1900)	Keep the EUT in communicating mode on UMTS 1900 band.
Data mode (RMC UMTS 850)	Keep the EUT in data communicating mode on RMC in UMTS 850 (12.2 kbps, 64 kbps, 144 kbps & 384 kbps).
Data mode (HSDPA UMTS 850)	Keep the EUT in data communicating mode on HSDPA in UMTS 850(Sub-test 1~Sub-test 4).
Data mode (HSUPA UMTS 850)	Keep the EUT in data communicating mode on HSDPA in UMTS 850(Sub-test 1~Sub-test 5).
Data mode (RMC UMTS 1900)	Keep the EUT in data communicating mode on RMC in UMTS 850 (12.2 kbps, 64 kbps, 144 kbps & 384 kbps).
Data mode (HSDPA UMTS 1900)	Keep the EUT in data communicating mode on HSDPA in UMTS 1900. (Sub-test 1~Sub-test 4).
Data mode (HSUPA UMTS 1900)	Keep the EUT in data communicating mode on HSDPA in UMTS 1900. (Sub-test 1~Sub-test 5).
Remark :	Pre-test output power of all modes, and found GSM 850, PCS 1900, UMTS 850 12.2 kbps RMC & UMTS 1900 12.2 kbps RMC were the worst case. The details please refer to section 6.5.

5.4 Related Submittal(s) / Grant (s)

This submittal(s) (test report) is filing to comply with Section Part 22 subpart H and Part 24 subpart E of the FCC CFR 47 Rules.

5.5 Test Methodology

Both conducted and radiated testing were performed according to the procedures document on TIA/EIA 603 and FCC CFR 47.1046, 2.1047, 2.1049, 2.1051, 2.1053, 2.1055 and 2.1057

5.6 Laboratory Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **FCC - Registration No.: 817957**

Shenzhen Zhongjian Nanfang Testing Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 817957, February 27, 2012.

- **IC - Registration No.: 10106A-1**

The 3m Semi-anechoic chamber of Shenzhen Zhongjian Nanfang Testing Co., Ltd. has been Registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 10106A-1.

- **CNAS - Registration No.: CNAS L6048**

Shenzhen Zhongjian Nanfang Testing Co., Ltd. is accredited to ISO/IEC 17025:2005 General Requirements for the Competence of Testing and Calibration laboratories for the competence of testing. The Registration No. is CNAS L6048.

5.7 Laboratory Location

Shenzhen Zhongjian Nanfang Testing Co., Ltd.
Address: No. B-C, 1/F., Building 2, Laodong No.2 Industrial Park, Xixiang Road,
Bao'an District, Shenzhen, Guangdong, China
Tel: +86-755-23118282
Fax: +86-755-23116366

5.8 Test Instruments list

Radiated Emission:						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal. Date (mm-dd-yy)	Cal. Due date (mm-dd-yy)
1	3m Semi- Anechoic Chamber	SAEMC	9(L)*6(W)* 6(H)	CCIS0001	08-23-2014	08-22-2017
2	BiConiLog Antenna	SCHWARZBECK MESS-ELEKTRONIK	VULB9163	CCIS0005	03-28-2015	03-28-2016
3	Double -ridged waveguide horn	SCHWARZBECK MESS-ELEKTRONIK	BBHA9120D	CCIS0006	03-28-2015	03-28-2016
4	EMI Test Software	AUDIX	E3	N/A	N/A	N/A
5	Coaxial Cable	CCIS	N/A	CCIS0016	03-01-2015	02-28-2016
6	Coaxial Cable	CCIS	N/A	CCIS0017	03-01-2015	02-28-2016
7	Coaxial cable	CCIS	N/A	CCIS0018	03-01-2015	02-28-2016
8	Coaxial Cable	CCIS	N/A	CCIS0019	03-01-2015	02-28-2016
9	Coaxial Cable	CCIS	N/A	CCIS0087	03-01-2015	02-28-2016
10	Amplifier(10kHz-1.3GHz)	HP	8447D	CCIS0003	04-01-2015	03-31-2016
11	Amplifier(1GHz-18GHz)	Compliance Direction Systems Inc.	PAP-1G18	CCIS0011	04-01-2015	03-31-2016
12	Pre-amplifier (18-26GHz)	Rohde & Schwarz	AFS33-18002 650-30-8P-44	GTS218	04-01-2015	03-31-2016
13	Horn Antenna	ETS-LINDGREN	3160	GTS217	04-01-2015	03-31-2016
14	Printer	HP	HP LaserJet P1007	N/A	N/A	N/A
15	Positioning Controller	UC	UC3000	CCIS0015	N/A	N/A
16	Spectrum analyzer 9k-30GHz	Rohde & Schwarz	FSP 30	CCIS0023	03-28-2015	03-28-2016
17	EMI Test Receiver	Rohde & Schwarz	ESPI	CCIS0022	03-28-2015	03-28-2016
18	Loop antenna	Laplace instrument	RF300	EMC0701	04-01-2015	03-31-2016
19	Universal radio communication tester	Rhode & Schwarz	CMU200	CCIS0069	03-28-2015	03-28-2016
20	Signal Analyzer	Rohde & Schwarz	FSIQ3	CCIS0088	04-08-2015	04-08-2016

6. System test configuration


6.1 EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the commission's requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

6.2 EUT Exercise

The EUT (Transmitter) was operated in the engineering mode to fix the Tx frequency which was for the purpose of the measurements.


6.3 Configuration of Tested System

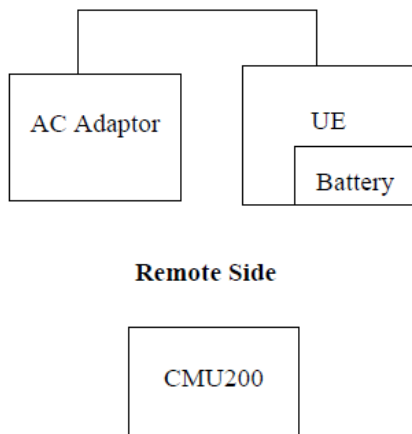

6.4 Description of Test Modes

The EUT has been tested under operating condition.
 EUT staying in continuous transmitting mode. Channel Low, Mid and High for each type band with rated data rate were chosen for full testing.
 The field strength of spurious radiation emission was measured as EUT stand-up position (H mode) and lie down position (E1, E2 mode) for three modes (GSM850, PCS1900, WCDMA Band V and WCDMA Band II) with power adaptor, earphone and Data cable. The worst-case H mode for GSM850, PCS1900, UMTS 850 and UMTS 1900.

6.5 Conducted Output Power

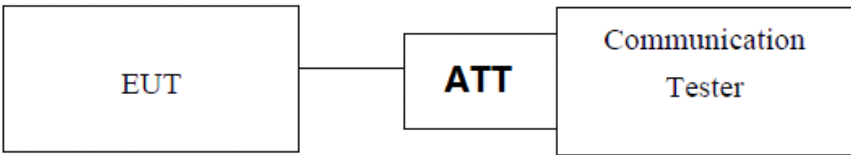Test Requirement:	FCC part 22.913(a) and FCC part 24.232(b)
Test Method:	FCC part 2.1046
Limit:	GSM 850 7W PCS 1900 2W WCDMA Band V: 7W WCDMA Band II: 2W
Test setup:	 <i>Note: Measurement setup for testing on Antenna connector</i>
Test Procedure:	The transmitter output was connected to a calibrated attenuator, the other end of which was connected to the CMU200. Transmitter output power was read off in dBm.
Test Instruments:	Refer to section 5.8 for details
Test mode:	Refer to section 5.3 for details
Test results:	Passed

Measurement Data


EUT Mode	Channel	Frequency (MHz)	Burst Average power (dBm)	Limit(dBm)	Result
GSM 850	128	824.20	32.00	38.45	Pass
	190	836.60	32.04		
	251	848.80	31.92		
GPRS 850 (1 Uplink slot)	128	824.20	32.17		
	190	836.60	32.20		
	251	848.80	32.08		
GPRS 850 (2 Uplink slots)	128	824.20	31.30		
	190	836.60	31.31		
	251	848.80	31.23		
GPRS 850 (3 Uplink slots)	128	824.20	29.39		
	190	836.60	29.42		
	251	848.80	29.40		
GPRS 850 (4 Uplink slots)	128	824.20	28.28		
	190	836.60	28.33		
	251	848.80	28.29		
EGPRS 850 (1 Uplink slot)	128	824.20	25.34		
	190	836.60	25.47		
	251	848.80	25.42		
EGPRS 850 (2 Uplink slots)	128	824.20	24.06		
	190	836.60	24.14		
	251	848.80	24.10		
EGPRS 850 (3 Uplink slot)	128	824.20	21.97		
	190	836.60	22.06		
	251	848.80	22.10		
EGPRS 850 (4 Uplink slot)	128	824.20	20.91		
	190	836.60	21.02		
	251	848.80	20.97		

PCS 1900	512	1850.20	29.76	33.00	Pass
	661	1880.00	29.71		
	810	1909.80	29.64		
GPRS 1900 (1 Uplink slot)	512	1850.20	29.75		
	661	1880.00	29.73		
	810	1909.80	29.65		
GPRS 1900 (2 Uplink slots)	512	1850.20	28.89		
	661	1880.00	28.89		
	810	1909.80	28.82		
GPRS 1900 (3 Uplink slots)	512	1850.20	26.97		
	661	1880.00	26.95		
	810	1909.80	26.88		
GPRS 1900 (4 Uplink slots)	512	1850.20	25.86		
	661	1880.00	25.82		
	810	1909.80	25.82		
EGPRS 1900 (1 Uplink slot)	512	1850.20	25.13		
	661	1880.00	25.39		
	810	1909.80	25.50		
EGPRS 1900 (2 Uplink slots)	512	1850.20	23.93		
	661	1880.00	24.18		
	810	1909.80	24.26		
EGPRS 1900 (3 Uplink slot)	512	1850.20	21.73		
	661	1880.00	22.01		
	810	1909.80	22.11		
EGPRS 1900 (4 Uplink slots)	512	1850.20	20.42		
	661	1880.00	20.80		
	810	1909.80	20.89		

EUT Mode		Channel	Frequency (MHz)	Burst Average power (dBm)	Limit(dBm)	Result
UMTS 850 HSDPA	Subtest 1	4132	826.40	21.65	38.45	Pass
		4183	836.00	21.62		
		4233	846.60	21.58		
	Subtest 2	4132	826.40	21.21		
		4183	836.00	21.21		
		4233	846.60	21.11		
	Subtest 3	4132	826.40	19.73		
		4183	836.00	19.75		
		4233	846.60	19.74		
	Subtest 4	4132	826.40	19.75		
		4183	836.00	19.80		
		4233	846.60	19.45		
UMTS 850 HSUPA	Subtest 1	4132	826.40	21.53		
		4183	836.00	24.53		
		4233	846.60	21.43		
	Subtest 2	4132	826.40	21.62		
		4183	836.00	21.58		
		4233	846.60	21.52		
	Subtest 3	4132	826.40	19.71		
		4183	836.00	19.70		
		4233	846.60	19.64		
	Subtest 4	4132	826.40	21.63		
		4183	836.00	21.63		
		4233	846.60	21.58		
	Subtest 5	4132	826.40	20.72		
		4183	836.00	20.73		
		4233	846.60	20.65		
UMTS 850 RMC	12.2kbps	4132	826.40	22.63		
		4183	836.00	22.60		
		4233	846.60	22.55		
UMTS 850 AMR	12.2kbps	4132	826.40	22.59		
		4183	836.00	22.54		
		4233	846.60	22.49		

EUT Mode		Channel	Frequency (MHz)	Burst Average power (dBm)	Limit(dBm)	Result
UMTS1900 HSDPA	Subtest 1	9262	1852.40	21.07	33.00	Pass
		9400	1880.00	21.04		
		9538	1907.60	21.02		
	Subtest 2	9262	1852.40	20.75		
		9400	1880.00	20.70		
		9538	1907.60	20.55		
	Subtest 3	9262	1852.40	19.10		
		9400	1880.00	19.10		
		9538	1907.60	19.08		
	Subtest 4	9262	1852.40	19.33		
		9400	1880.00	19.17		
		9538	1907.60	19.17		
UMTS1900 HSUPA	Subtest 1	9262	1852.40	21.43		
		9400	1880.00	21.37		
		9538	1907.60	21.36		
	Subtest 2	9262	1852.40	21.40		
		9400	1880.00	21.49		
		9538	1907.60	21.41		
	Subtest 3	9262	1852.40	19.50		
		9400	1880.00	19.65		
		9538	1907.60	19.59		
	Subtest 4	9262	1852.40	21.45		
		9400	1880.00	21.47		
		9538	1907.60	21.49		
	Subtest 5	9262	1852.40	20.55		
		9400	1880.00	20.61		
		9538	1907.60	20.37		
UMTS1900 RMC	12.2kbps	9262	1852.40	22.52		
		9400	1880.00	22.39		
		9538	1907.60	22.43		
UMTS1900 AMR	12.2kbps	9262	1852.40	22.45		
		9400	1880.00	22.37		
		9538	1907.60	22.34		

6.6 Occupy Bandwidth

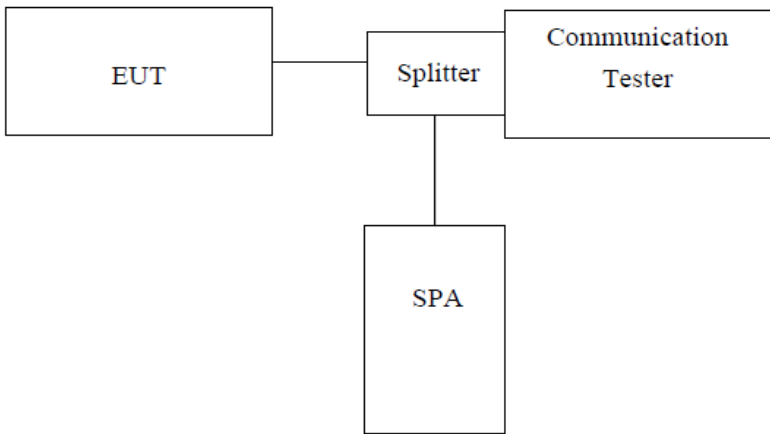Test Requirement:	FCC part 22.913(a) and FCC part 24.232(b)
Test Method:	FCC part 2.1049
Test setup:	 <i>Note: Measurement setup for testing on Antenna connector</i>
Test Procedure:	1. The EUT's output RF connector was connected with a short cable to the spectrum analyzer 2. RBW was set to about 1% of emission BW, VBW= 3 times RBW. 3. -26dBc display line was placed on the screen (or 99% bandwidth), the occupied bandwidth is the delta frequency between the two points where the display line intersects the signal trace.
Test Instruments:	Refer to section 5.8 for details
Test mode:	Refer to section 5.3 for details
Test results:	Passed

Measurement Data


EUT Mode	Channel	Frequency (MHz)	99% Occupy bandwidth (kHz)	-26dB bandwidth (kHz)
GSM 850	128	824.2	246	316
	190	836.6	246	318
	251	848.8	246	316
EGPRS850	128	824.2	248	312
	190	836.6	252	314
	251	848.8	250	314
PCS 1900	512	1850.2	246	318
	661	1880.0	246	320
	810	1909.8	246	316
EGPRS1900	512	1850.2	246	318
	661	1880.0	242	316
	810	1909.8	246	310
UMTS850 12.2k RMC	4132	824.40	4220	4820
	4183	836.00	4220	4860
	4233	846.60	4200	4860
UMTS1900 12.2k RMC	9262	1852.40	4220	4840
	9400	1880.00	4220	4860
	9538	1907.60	4220	4880

Note: GSM & GPRS use the same modulation technical (GMSK), and with the same channels, so the 99% OBW and the -26dB of GPRS not performed.

Test plot as follows:


99% Occupy bandwidth

GSM850

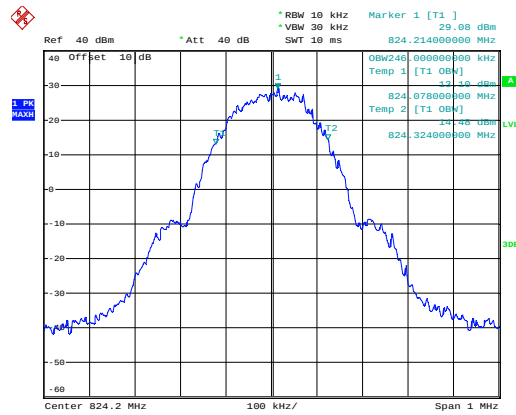


Date: 3.APR.2015 11:46:31

Lowest channel

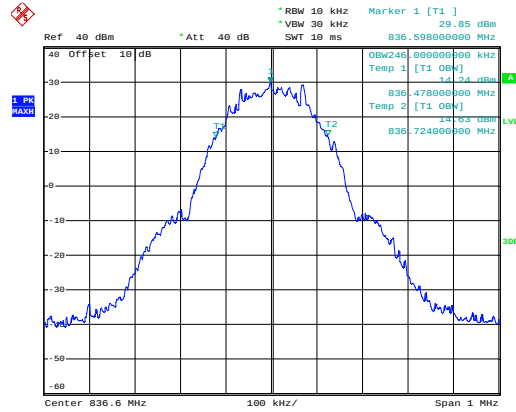

Date: 3.APR.2015 11:47:02

Middle channel

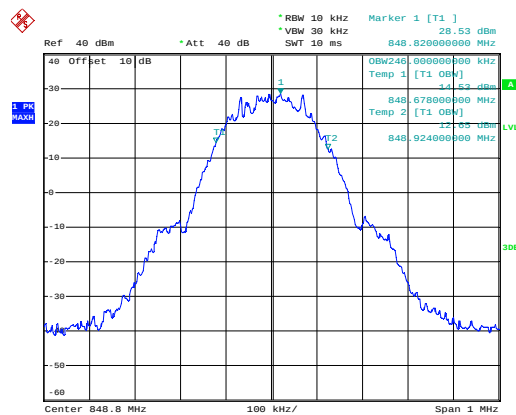


Date: 3.APR.2015 11:47:31

Highest channel


26dB Emission Bandwidth

GSM850

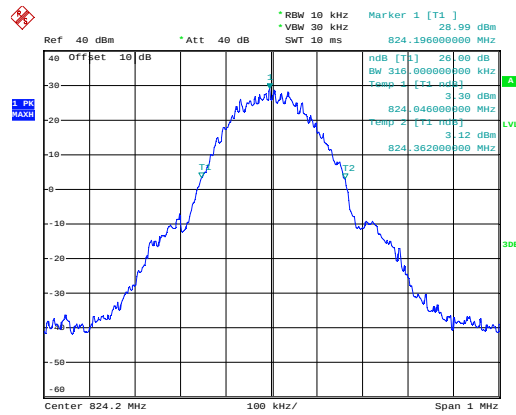


Date: 3.APR.2015 11:48:52

Lowest channel

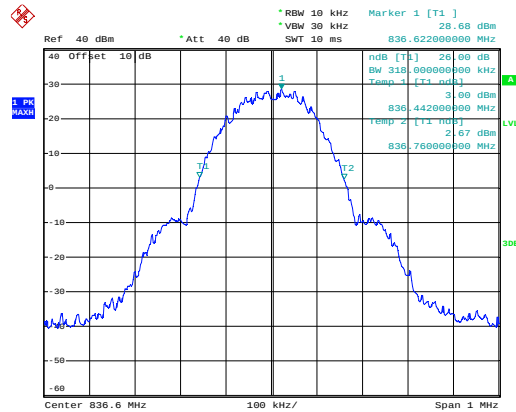

Date: 3.APR.2015 11:48:33

Middle channel

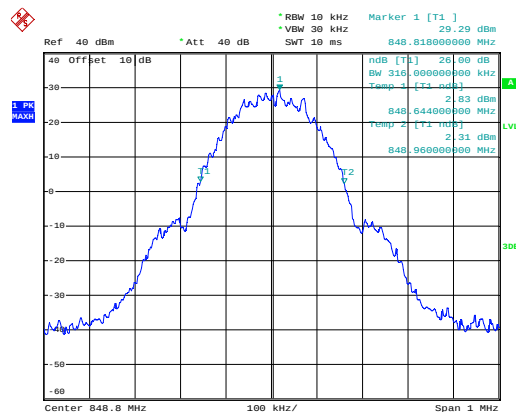


Date: 3.APR.2015 11:48:04

Highest channel


99% Occupy bandwidth

EGPRS850

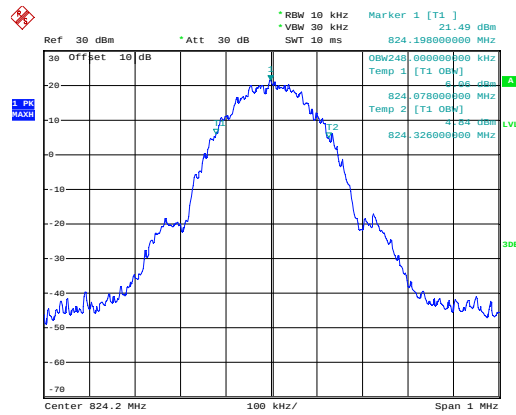


Date: 3.APR.2015 12:01:56

Lowest channel

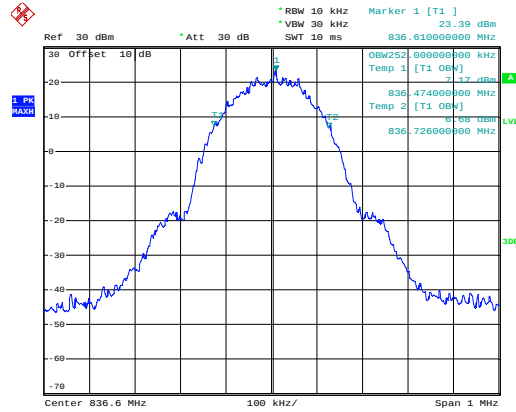

Date: 3.APR.2015 12:01:30

Middle channel

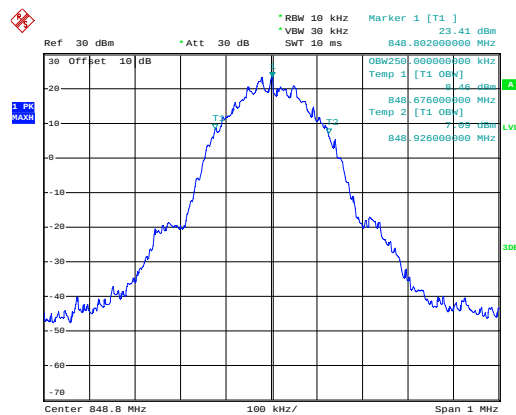


Date: 3.APR.2015 12:00:59

Highest channel


26dB Emission Bandwidth

EGPRS850

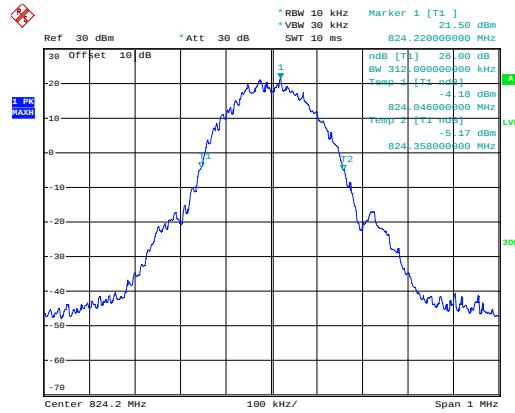


Date: 3.APR.2015 12:02:12

Lowest channel

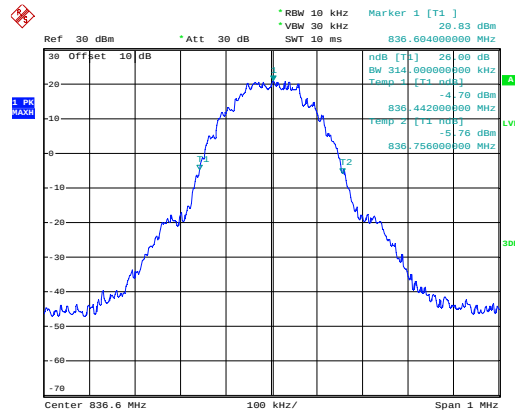

Date: 3.APR.2015 12:02:33

Middle channel

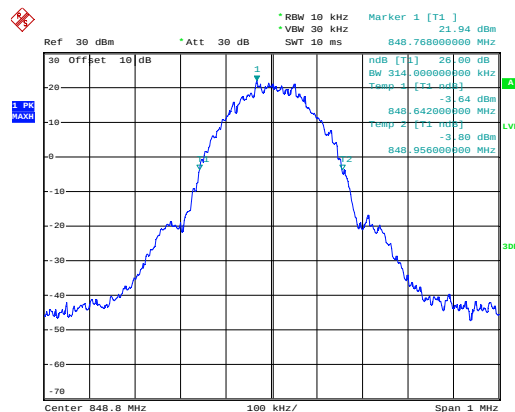


Date: 3.APR.2015 12:02:59

Highest channel


99% Occupy bandwidth

PCS 1900

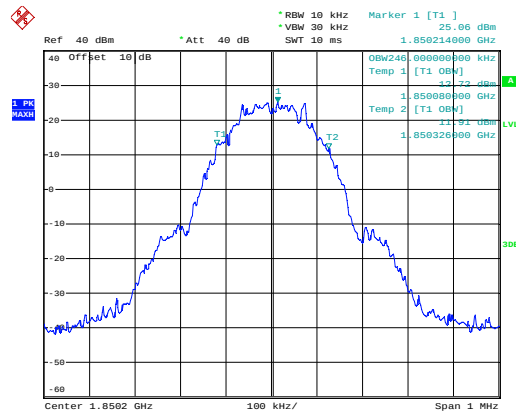


Date: 3.APR.2015 12:08:30

Lowest channel

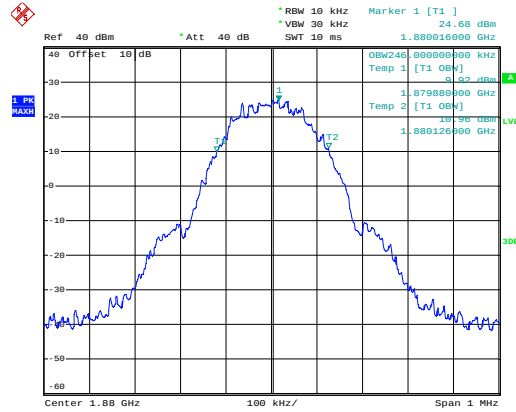

Date: 3.APR.2015 12:08:09

Middle channel

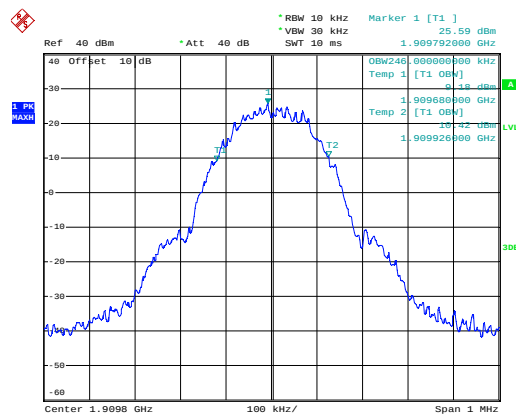


Date: 3.APR.2015 12:07:49

Highest channel


26dB Emission Bandwidth

PCS 1900

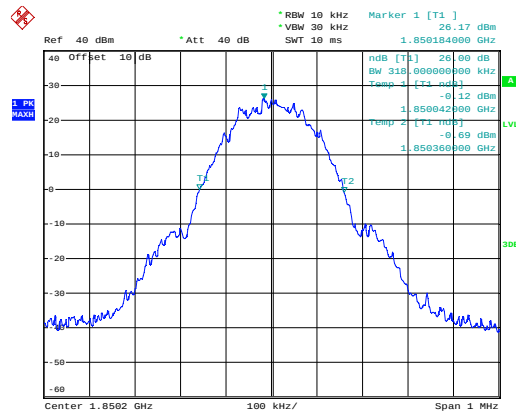


Date: 3.APR.2015 12:06:35

Lowest channel

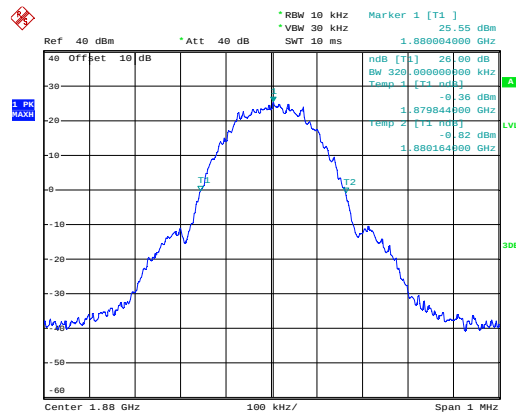

Date: 3.APR.2015 12:07:01

Middle channel

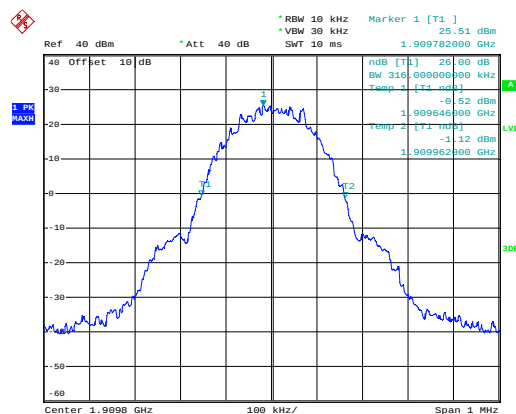


Date: 3.APR.2015 12:07:32

Highest channel


99% Occupy bandwidth

EGPRS 1900

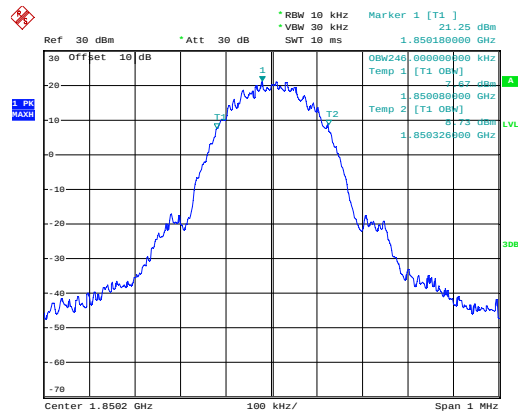


Date: 3.APR.2015 13:43:27

Lowest channel

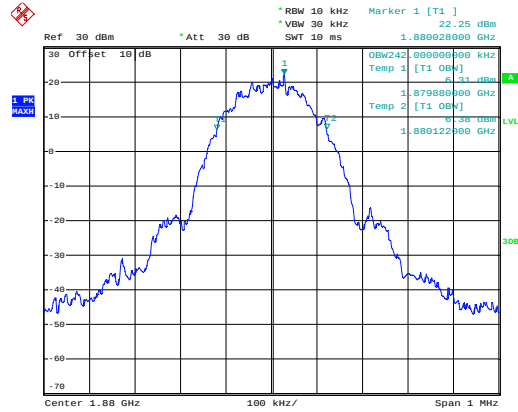

Date: 3.APR.2015 13:44:40

Middle channel

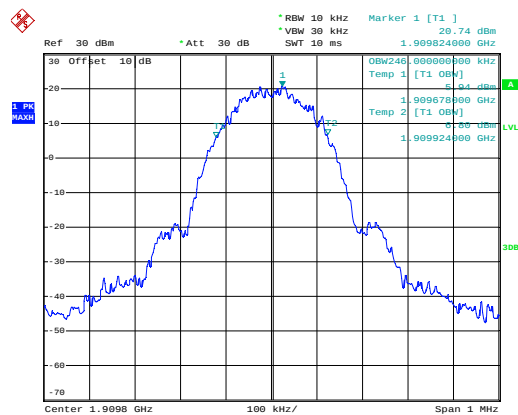


Date: 3.APR.2015 13:45:03

Highest channel


26dB Emission Bandwidth

EGPRS 1900

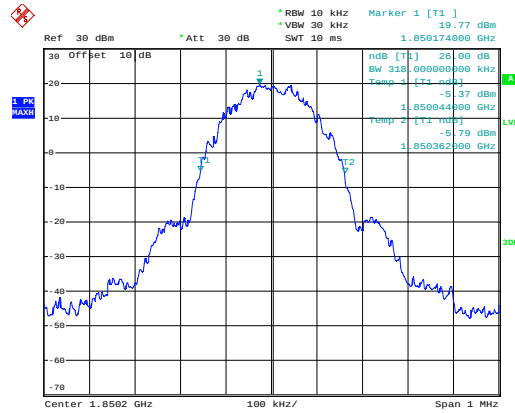


Date: 3.APR.2015 13:43:43

Lowest channel

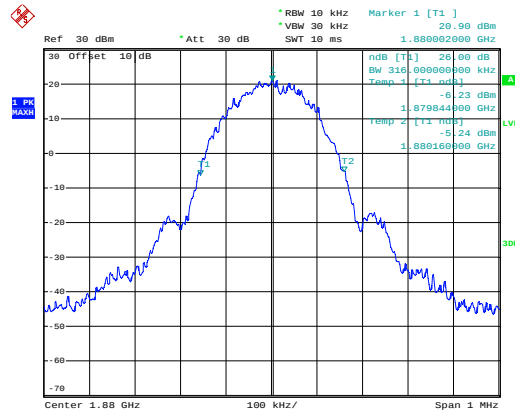

Date: 3.APR.2015 13:44:24

Middle channel

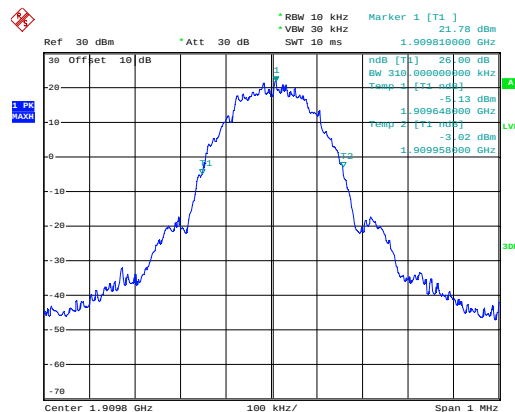


Date: 3.APR.2015 13:45:21

Highest channel


99% Occupy bandwidth

UMTS 850 12.2k RMC

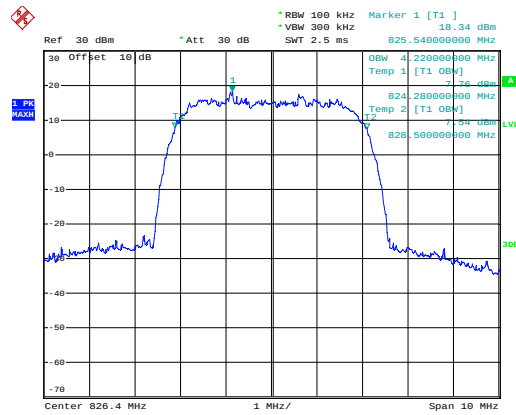


Date: 3.APR.2015 13:48:26

Lowest channel

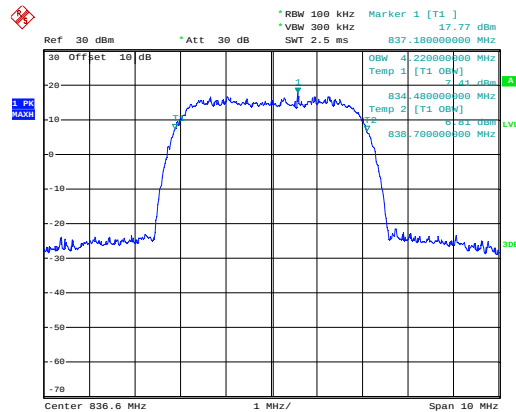

Date: 3.APR.2015 13:48:57

Middle channel

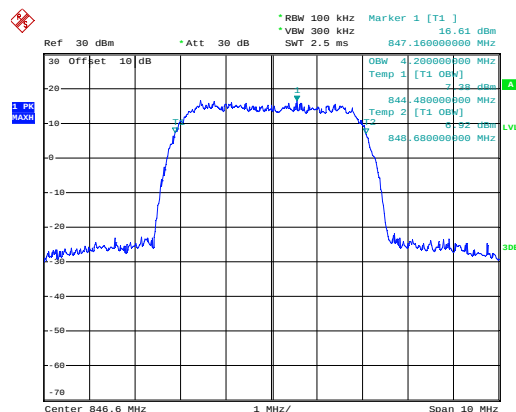


Date: 3.APR.2015 13:49:42

Highest channel


26dB Emission Bandwidth

UMTS 850 12.2k RMC

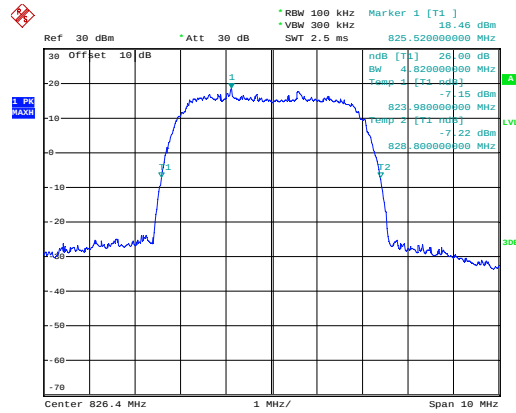


Date: 3.APR.2015 13:48:08

Lowest channel

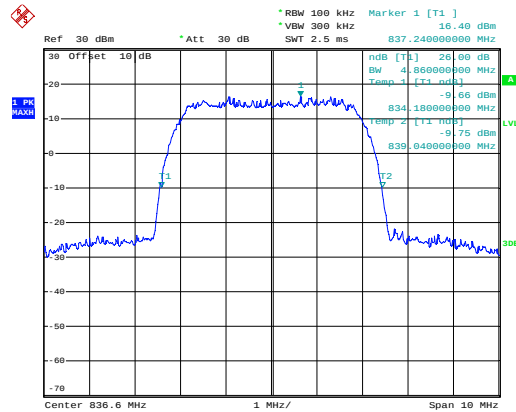

Date: 3.APR.2015 13:49:07

Middle channel

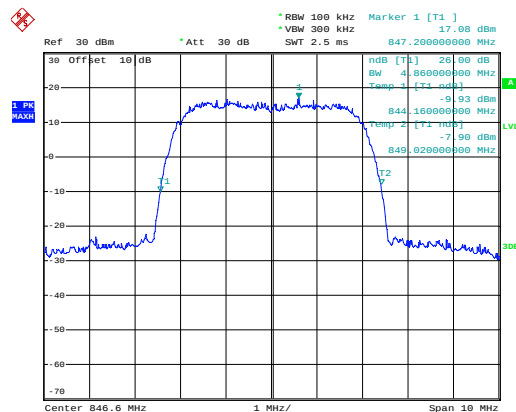


Date: 3.APR.2015 13:49:33

Highest channel


99% Occupy bandwidth

UMTS 1900 12.2k RMC

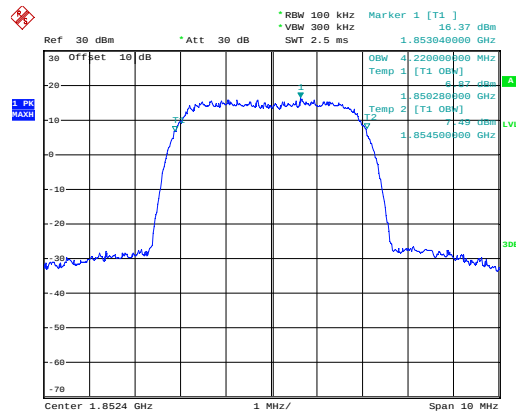


Date: 3.APR.2015 13:59:31

Lowest channel

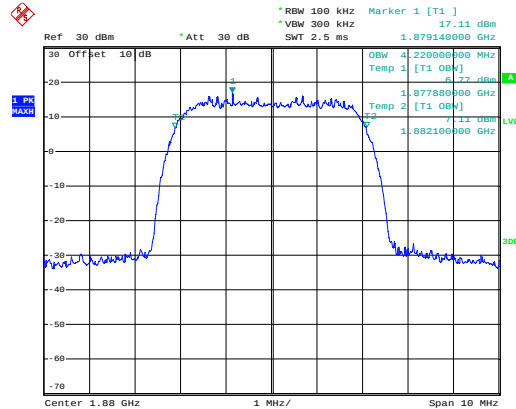

Date: 3.APR.2015 14:00:26

Middle channel

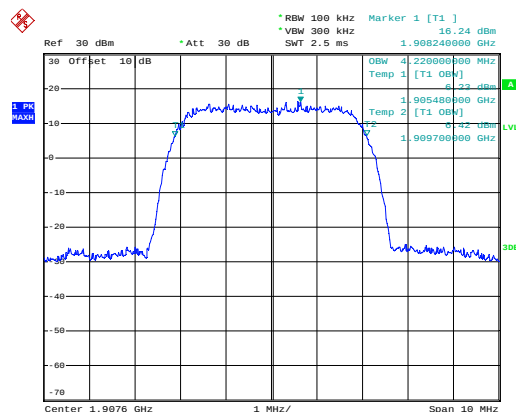


Date: 3.APR.2015 14:00:51

Highest channel


26dB Emission Bandwidth

UMTS 1900 12.2k RMC

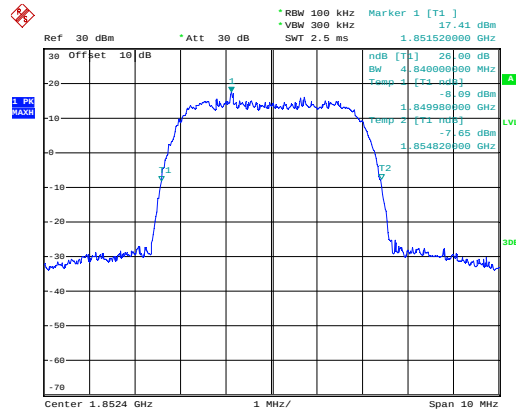


Date: 3.APR.2015 13:59:44

Lowest channel

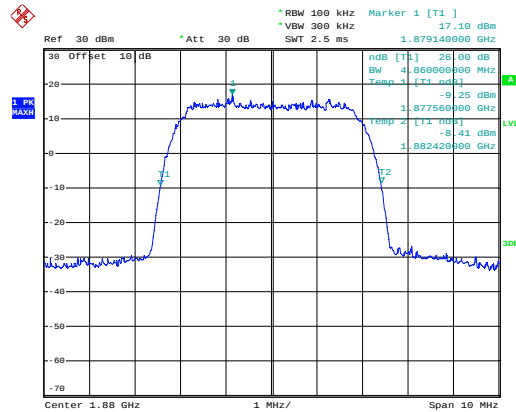

Date: 3.APR.2015 14:00:11


Middle channel

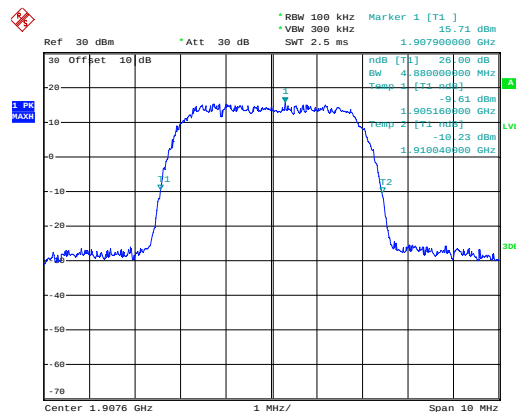

Date: 3.APR.2015 14:01:01

Highest channel

6.7 Peak-to-Average Ratio

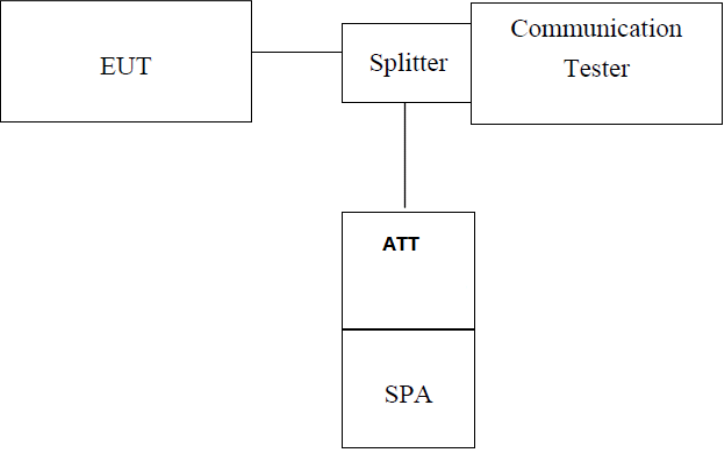Test Requirement:	FCC part 24.232(d)
Limit:	The peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.
Test setup:	 <i>Note: Measurement setup for testing on Antenna connector</i>
Test Procedure:	1 The RF output of the transceiver was connected to a spectrum analyzer through appropriate attenuation. 2 Set the CCDF option in spectrum analyzer, RBW $\geq$ OBW, 3 Set the EUT working in highest power level, measured and recorded the 0.1% as PAPR level. 4 Repeat step 1~3 at other frequency and modulations.
Test Instruments:	Refer to section 5.8 for details
Test mode:	Refer to section 5.3 for details
Test results:	Passed


Measurement Data (worst case)

Modulation	Test channel	PAPR
GSM 850	190	0.07
EGPRS 850	190	0.18
PCS 1900	661	0.09
EGPRS 1900	661	0.22
UMTS 850 HSDPA	4183	3.24
UMTS 850 HSUPA	4183	4.08
UMTS 850 RMC	4183	3.12
UMTS1900 HSDPA	9400	3.04
UMTS1900 HSUPA	9400	3.16
UMTS1900 RMC	9400	2.76

Test plots as below:

Middle channel


Modulation: GSM 850

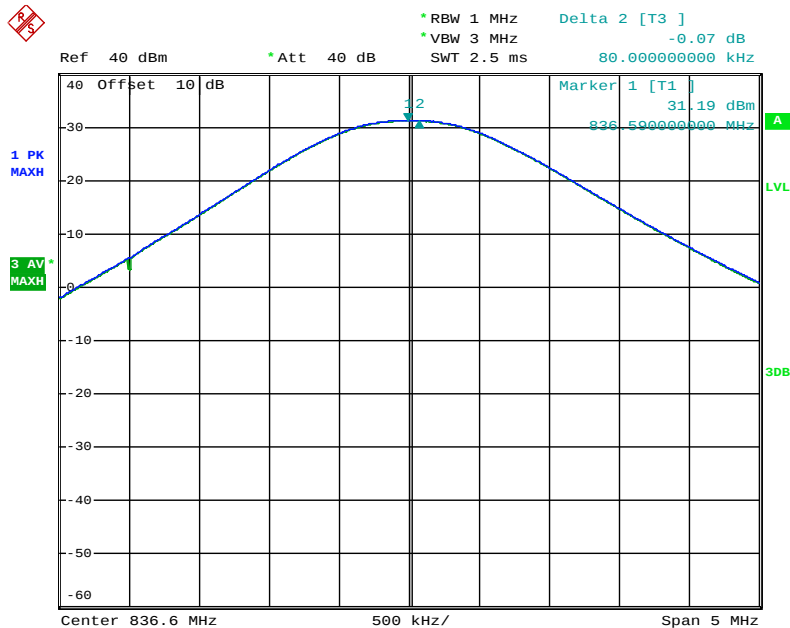

Date: 22.MAY.2015 10:45:14

Middle channel


Modulation: EGPRS 850

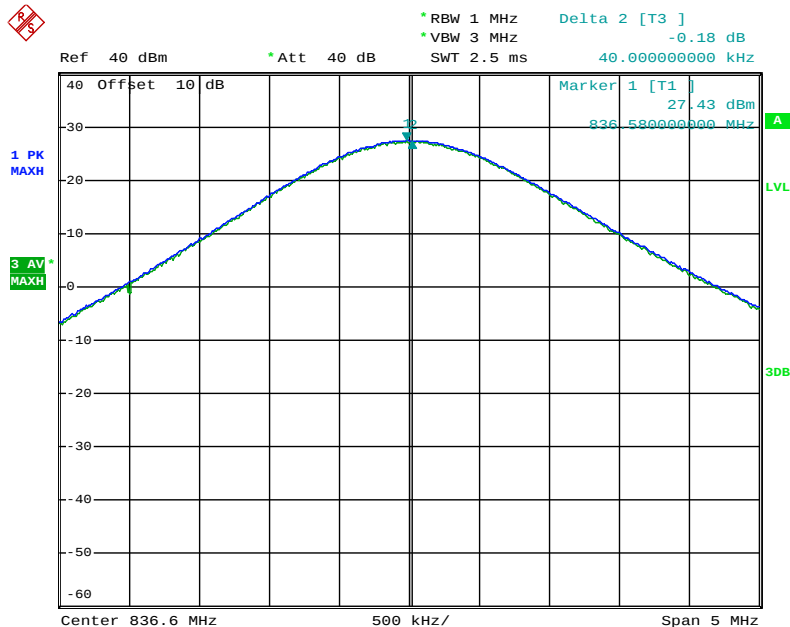

Date: 22.MAY.2015 10:49:33

Middle channel


Modulation: PCS 1900

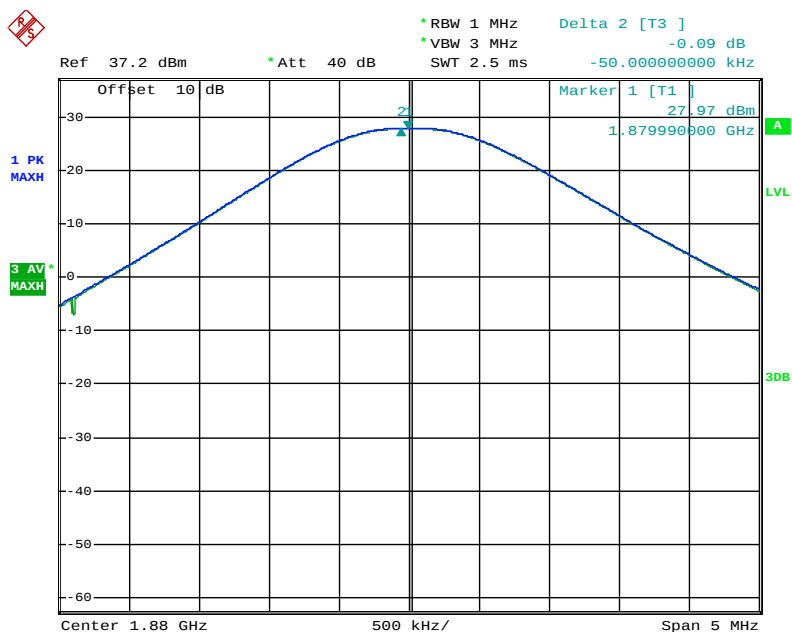

Date: 22.MAY.2015 10:39:02

Middle channel


Modulation: EGPRS 1900

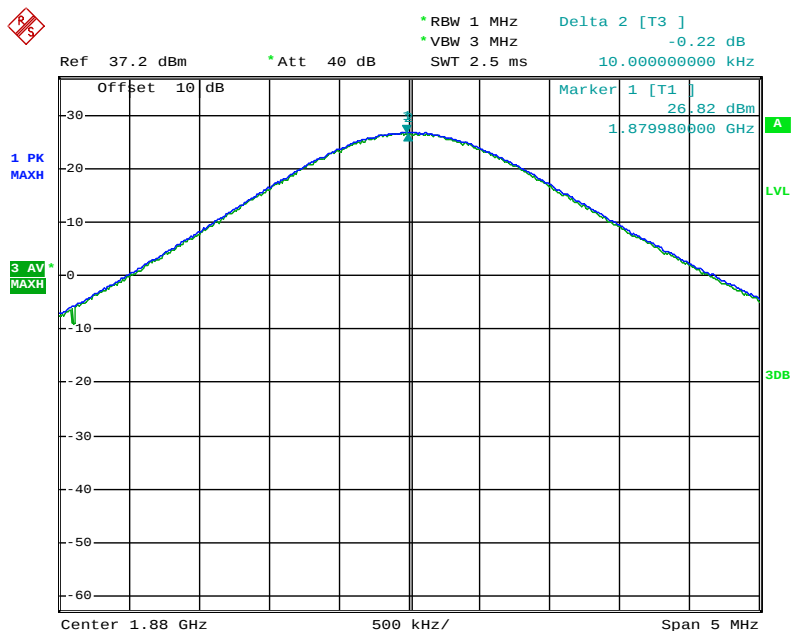

Date: 22.MAY.2015 10:41:34

Middle channel

Modulation: UMTS 850 HSDPA

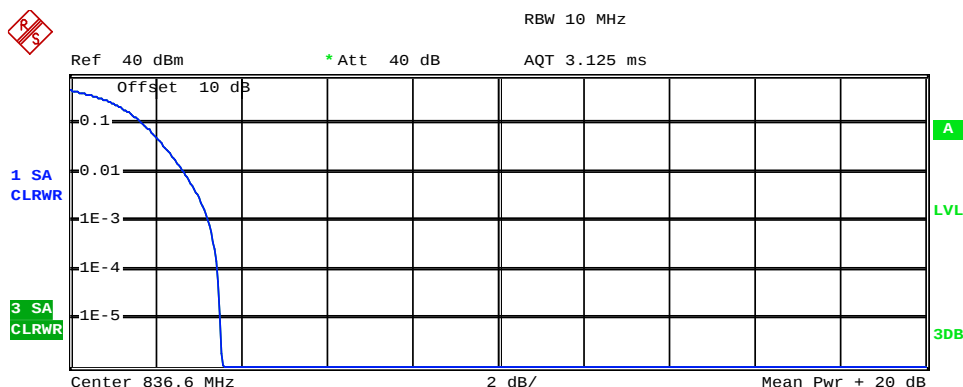


Complementary Cumulative Distribution Function (100000 samples)

	Trace 1	Trace 3
Mean	20.98 dBm	20.98 dBm
Peak	24.54 dBm	24.54 dBm
Crest	3.56 dB	3.56 dB
10 %	1.72 dB	1.72 dB
1 %	2.68 dB	2.68 dB
.1 %	3.24 dB	3.24 dB
.01 %	3.48 dB	3.48 dB

Middle channel

Modulation: UMTS 850 HSUPA

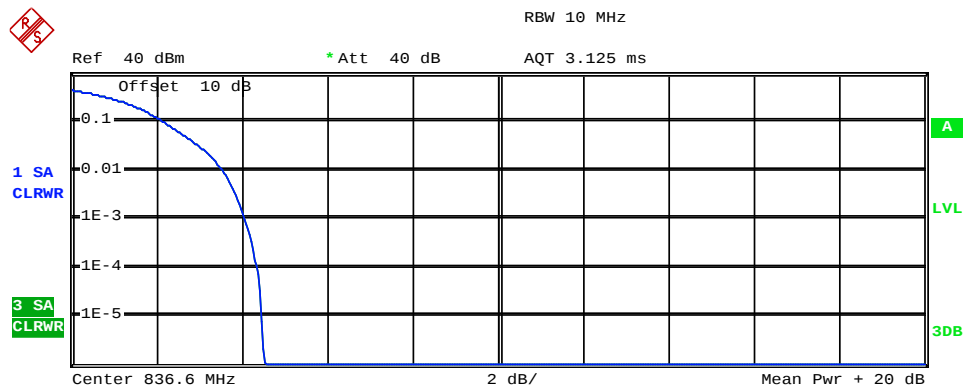


Complementary Cumulative Distribution Function (100000 samples)

	Trace 1	Trace 3
Mean	20.37 dBm	20.37 dBm
Peak	24.89 dBm	24.89 dBm
Crest	4.53 dB	4.53 dB
10 %	2.20 dB	2.20 dB
1 %	3.56 dB	3.56 dB
.1 %	4.08 dB	4.08 dB
.01 %	4.36 dB	4.36 dB


Middle channel

Modulation: UMTS 850 RMC

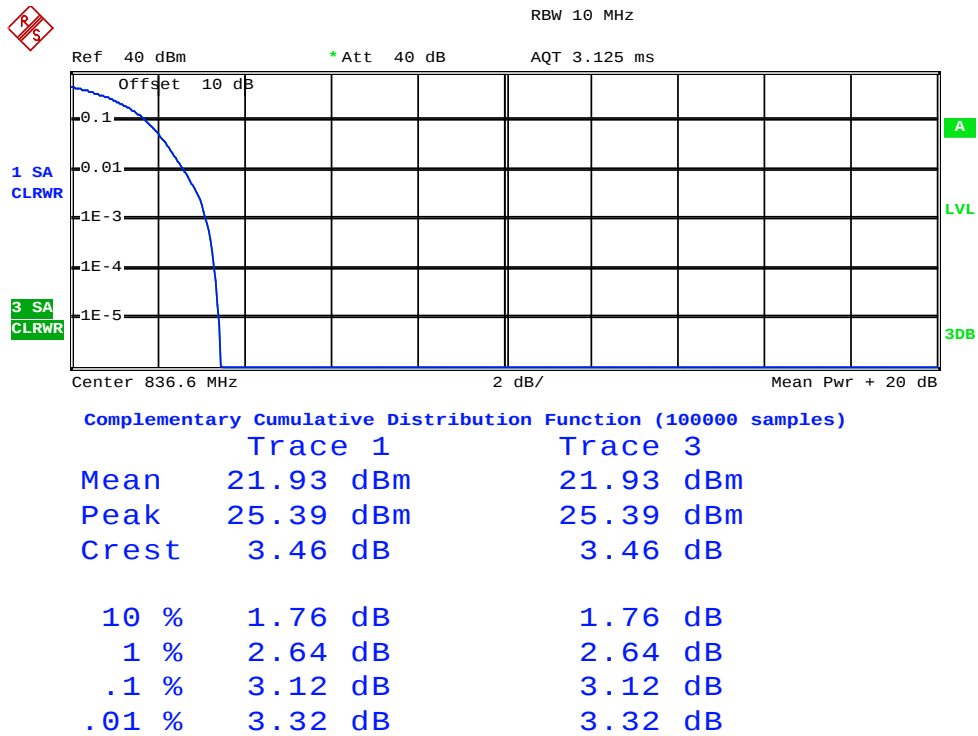


Middle channel

Modulation: UMTS1900 HSDPA

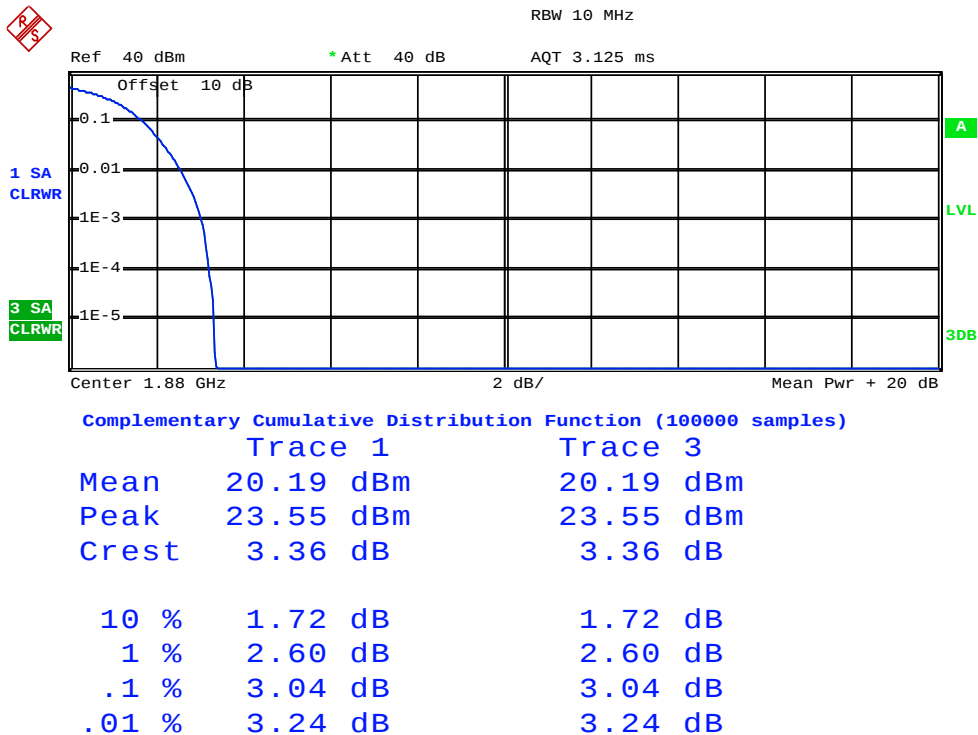


Middle channel

Modulation: UMTS1900 HSUPA

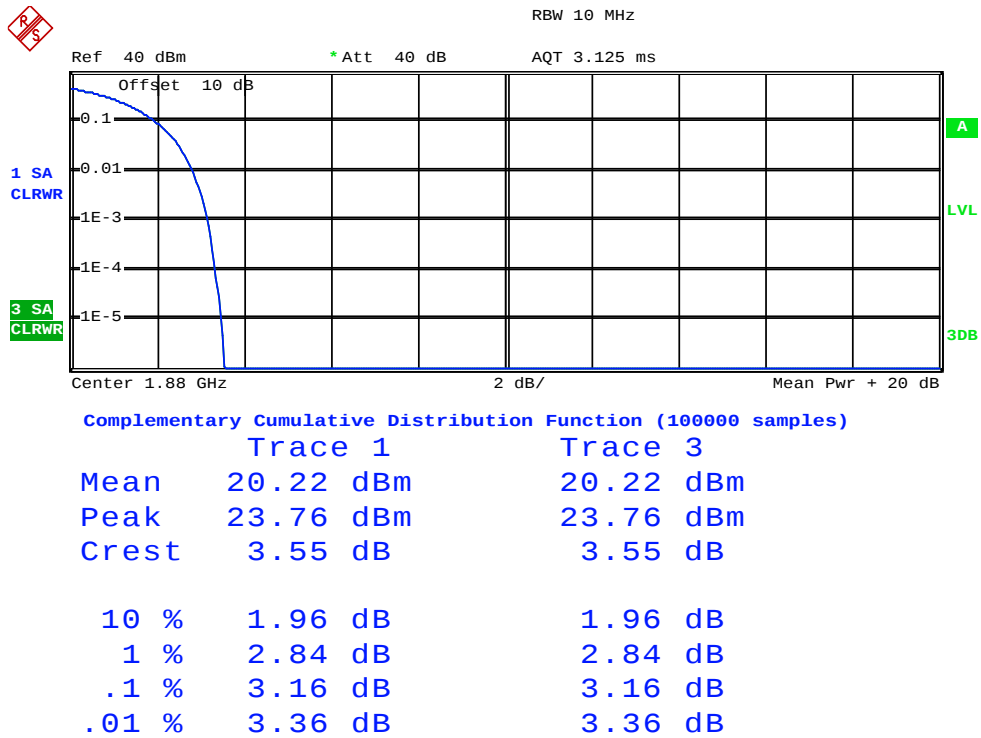

Middle channel


Modulation: UMTS1900 RMC

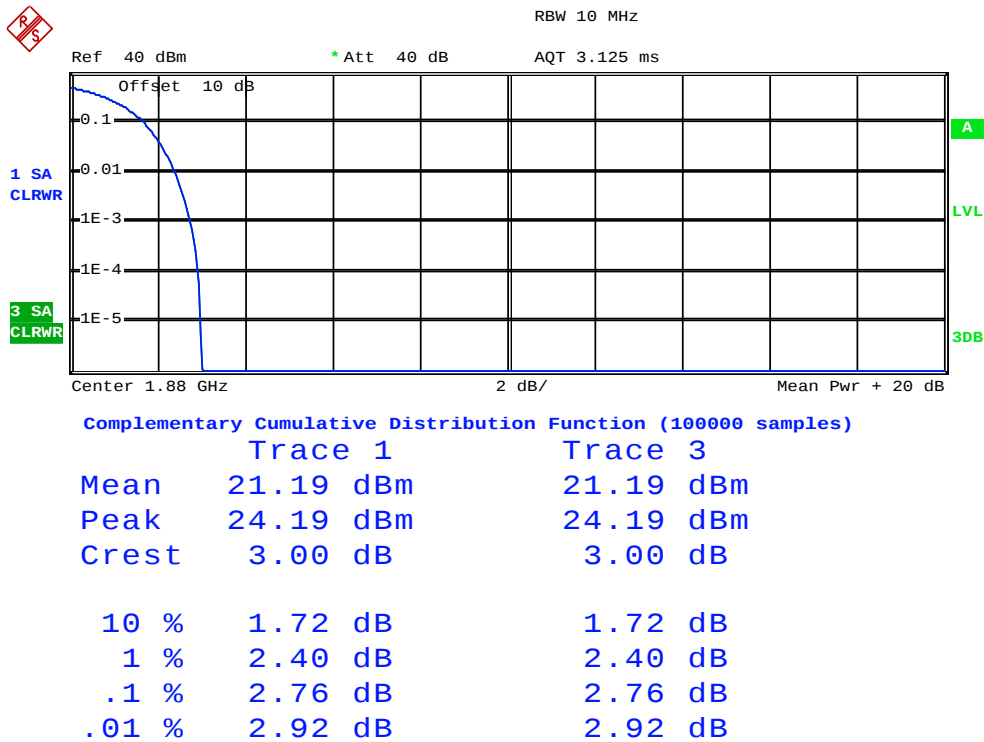

6.8 Modulation Characteristic

According to FCC § 2.1047(d), Part 22H & 24E there is no specific requirement for digital modulation, therefore modulation characteristic is not presented.

6.9 Out of band emission at antenna terminals

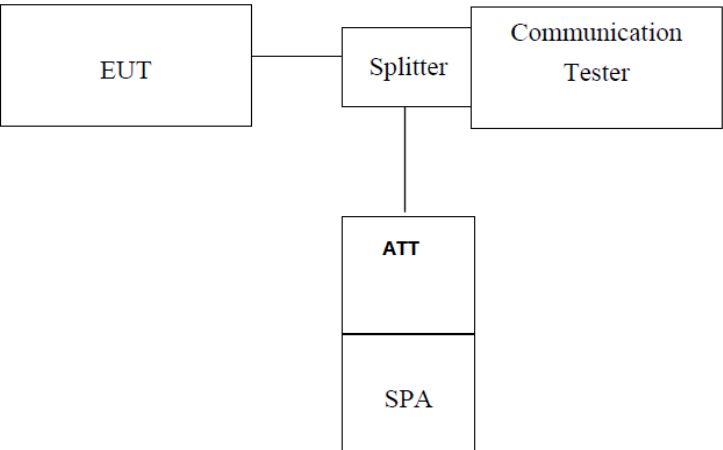
Test Requirement:	FCC part 22.917(a) and FCC part 24.238(a)
Test Method:	FCC part 2.1051
Limit:	-13dBm
Test setup:	 <i>Note: Measurement setup for testing on Antenna connector</i>
Test Procedure:	5 The RF output of the transceiver was connected to a spectrum analyzer through appropriate attenuation. 6 The resolution bandwidth of the spectrum analyzer was set at 100 kHz when below 1GHz, 1MHz when above 1 GHz; sufficient scans were taken to show the out of band Emissions if any up to 10th harmonic. 7 For the out of band: Set the RBW=100 kHz, VBW=300 kHz when below 1 GHz, RBW =1 MHz, VBW=3 MHz when above 1 GHz, Start=30MHz, Stop= 10th harmonic. 8 Band Edge Requirements: In the 1 MHz bands immediately outside and adjacent to the frequency block, a resolution bandwidth of at least 1 percent of the emission bandwidth of the fundamental emission of the transmitter may be employed to measure the out of band Emissions.
Test Instruments:	Refer to section 5.8 for details
Test mode:	Refer to section 5.3 for details
Test results:	Passed

Test plots as follows:

Spurious emission


GSM 850

Lowest Channel

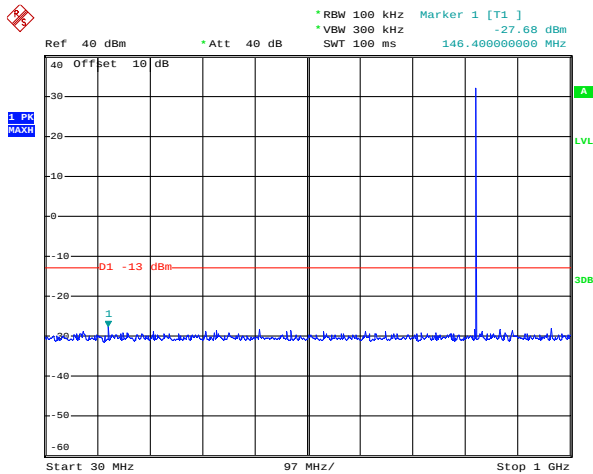

Date: 3.APR.2015 11:50:16


30MHz~1GHz

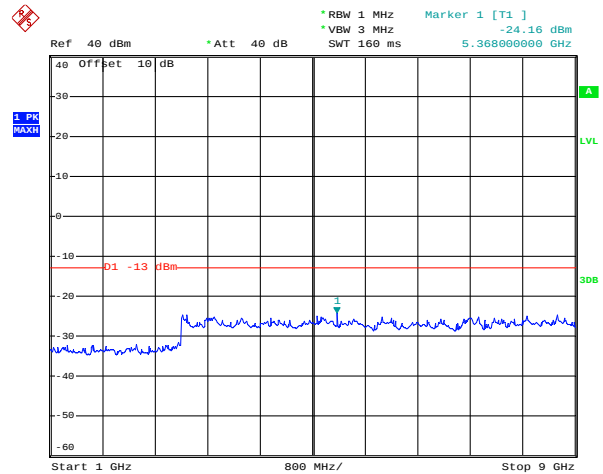

Date: 3.APR.2015 11:52:20


1GHz~9GHz

Middle channel

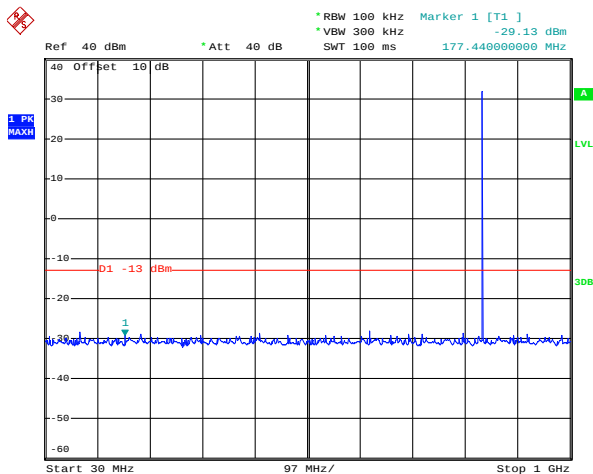

Date: 3.APR.2015 11:50:37


30MHz~1GHz

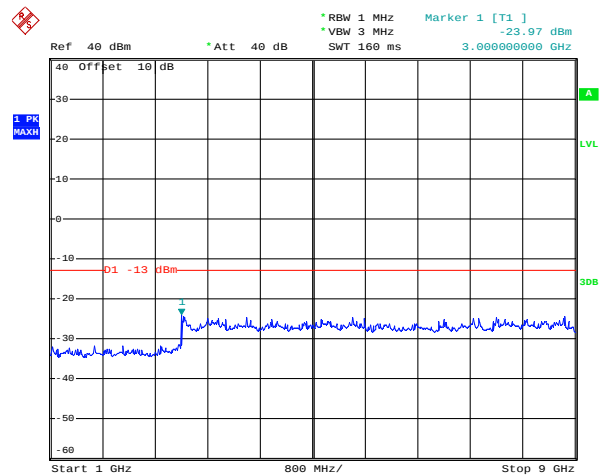

Date: 3.APR.2015 11:52:05


1GHz~9GHz

Highest Channel

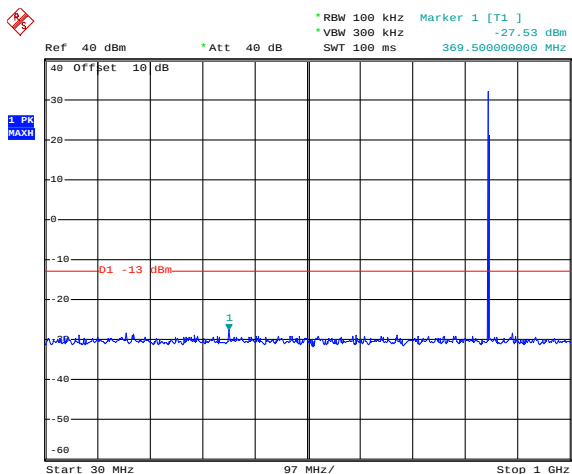

Date: 3.APR.2015 11:51:17

30MHz~1GHz

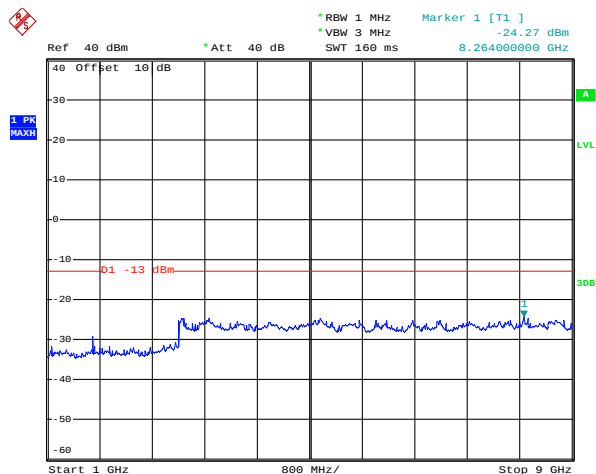


Date: 3.APR.2015 11:51:48

1GHz~9GHz


PCS 1900

Lowest Channel

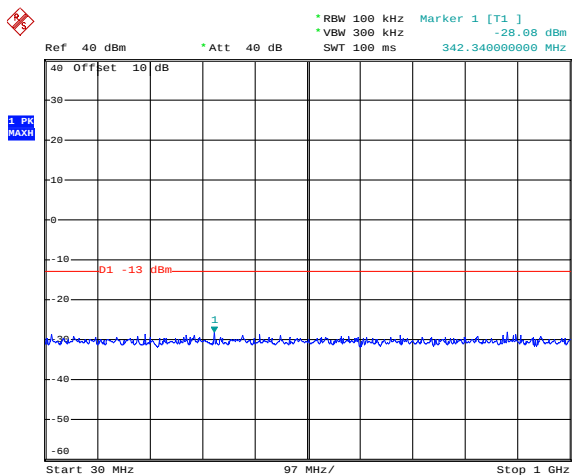

Date: 3.APR.2015 12:09:24


30MHz~1GHz

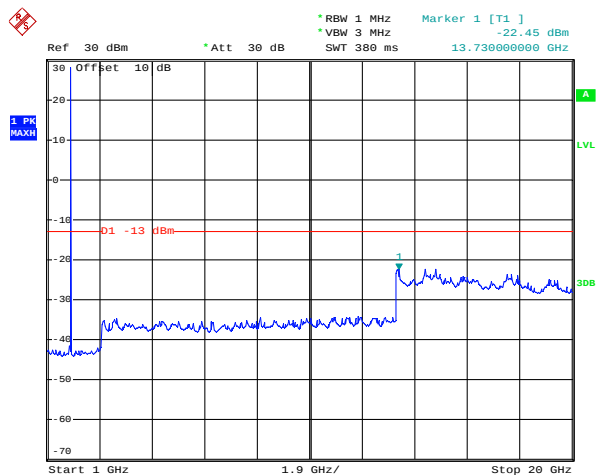

Date: 3.APR.2015 12:12:35


1GHz~20GHz

Middle Channel

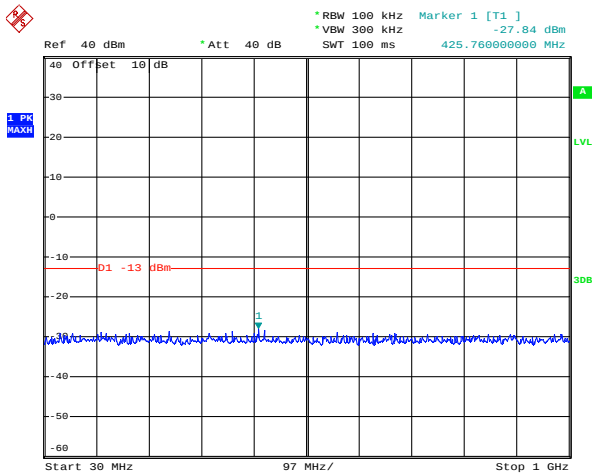

Date: 3.APR.2015 12:09:45


30MHz~1GHz

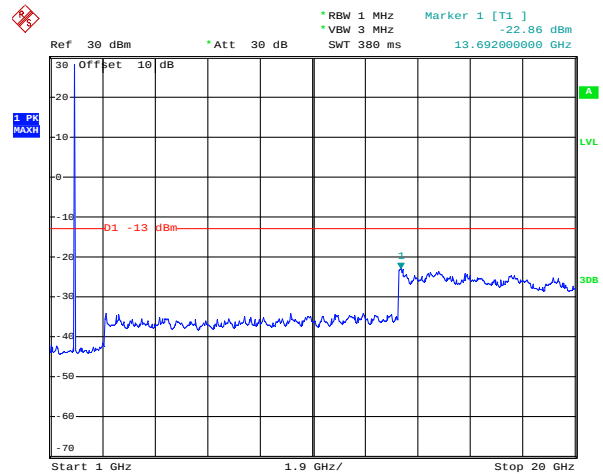

Date: 3.APR.2015 12:11:57


1GHz~20GHz

Highest Channel

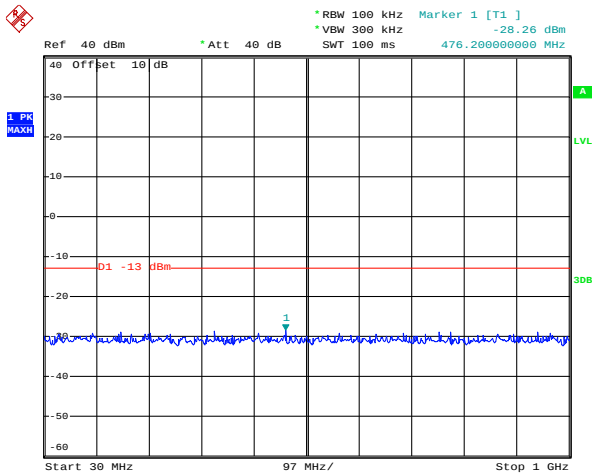

Date: 3.APR.2015 12:10:04

30MHz~1GHz

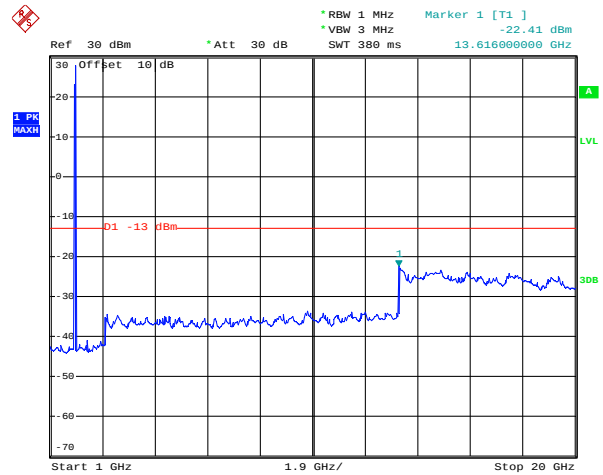


Date: 3.APR.2015 12:10:58

1GHz~20GHz


UMTS 850 12.2k RMC

Lowest Channel

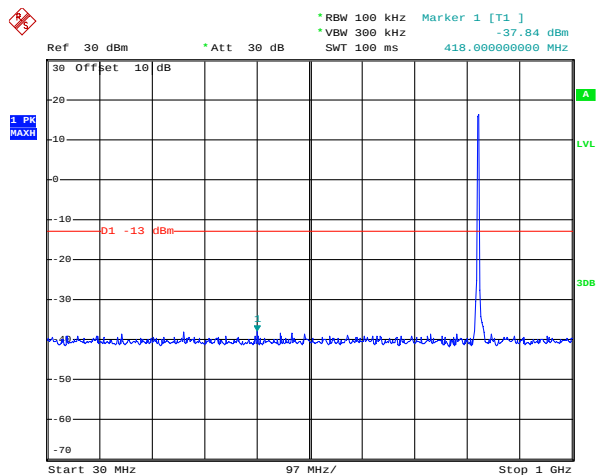

Date: 3.APR.2015 13:51:46


30MHz~1GHz

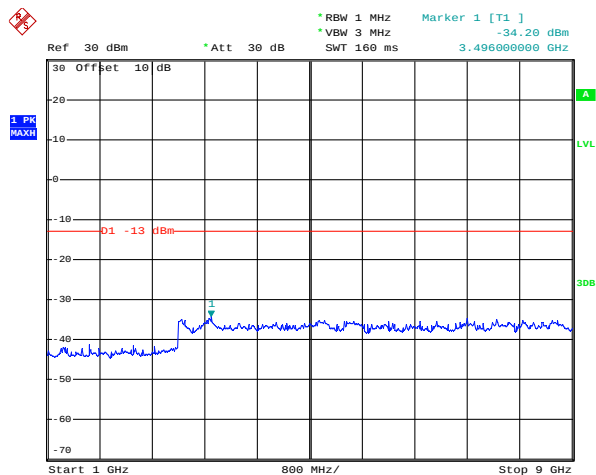

Date: 3.APR.2015 13:52:20


1GHz~9GHz

Middle Channel

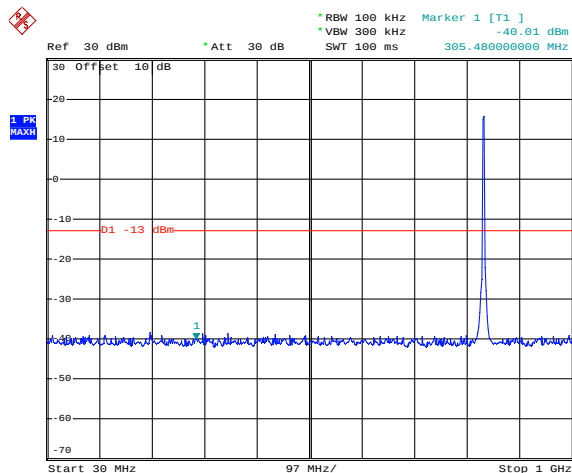

Date: 3.APR.2015 13:51:13


30MHz~1GHz

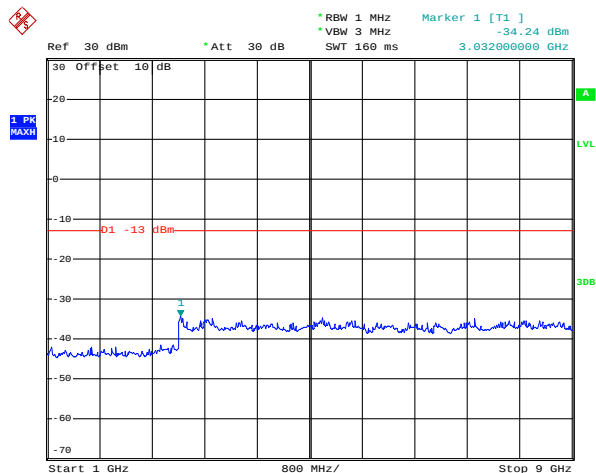

Date: 3.APR.2015 13:52:46


1GHz~9GHz

Highest Channel

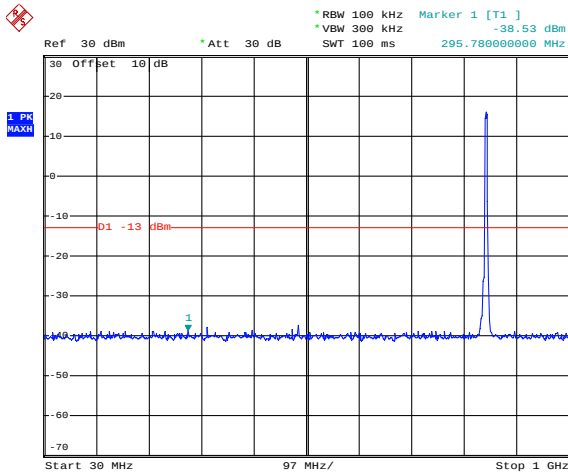

Date: 3.APR.2015 13:50:47

30MHz~1GHz

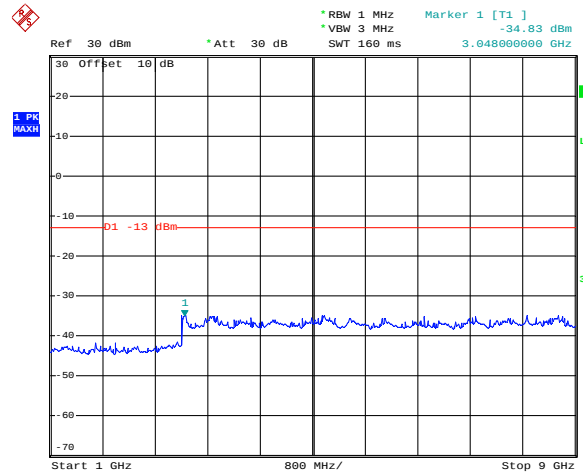


Date: 3.APR.2015 13:53:08

1GHz~9GHz


UMTS 1900 12.2k RMC

Lowest Channel

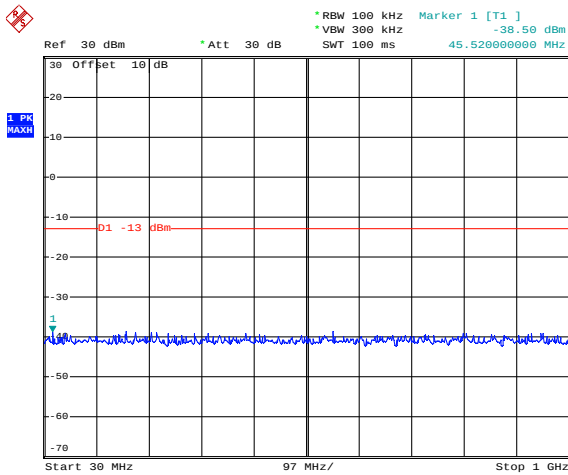

Date: 3.APR.2015 14:02:35


30MHz~1GHz

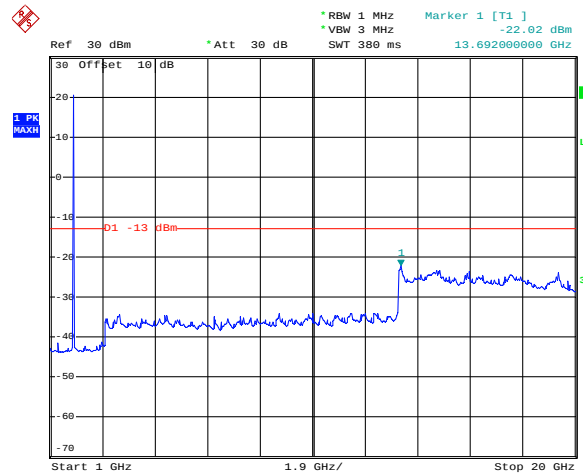

Date: 3.APR.2015 14:03:19


1GHz~20GHz

Middle Channel

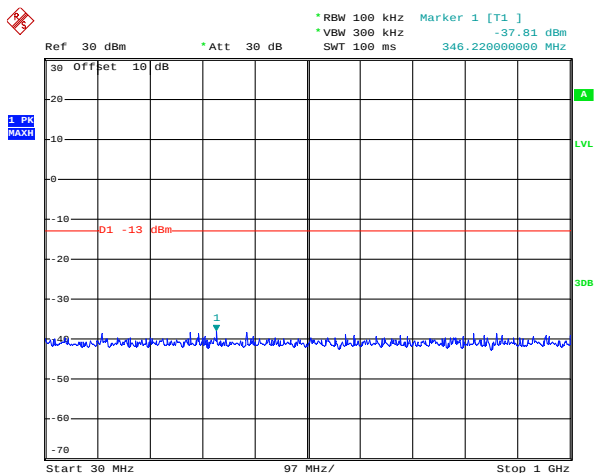

Date: 3.APR.2015 14:02:18


30MHz~1GHz

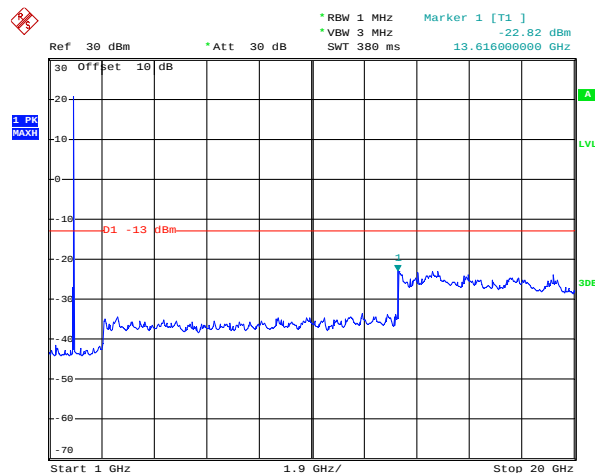

Date: 3.APR.2015 14:03:45


1GHz~20GHz

Highest Channel

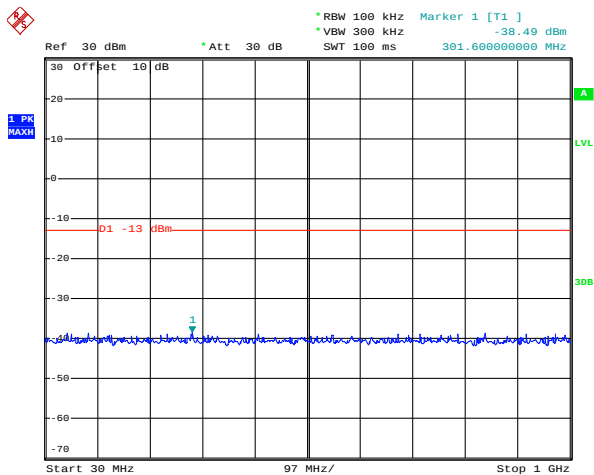

Date: 3.APR.2015 14:02:00

30MHz~1GHz

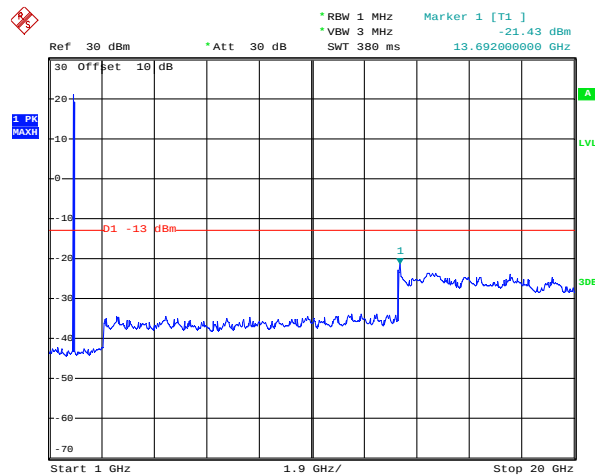


Date: 3.APR.2015 14:04:11

1GHz~20GHz


Band edge emission

GSM850

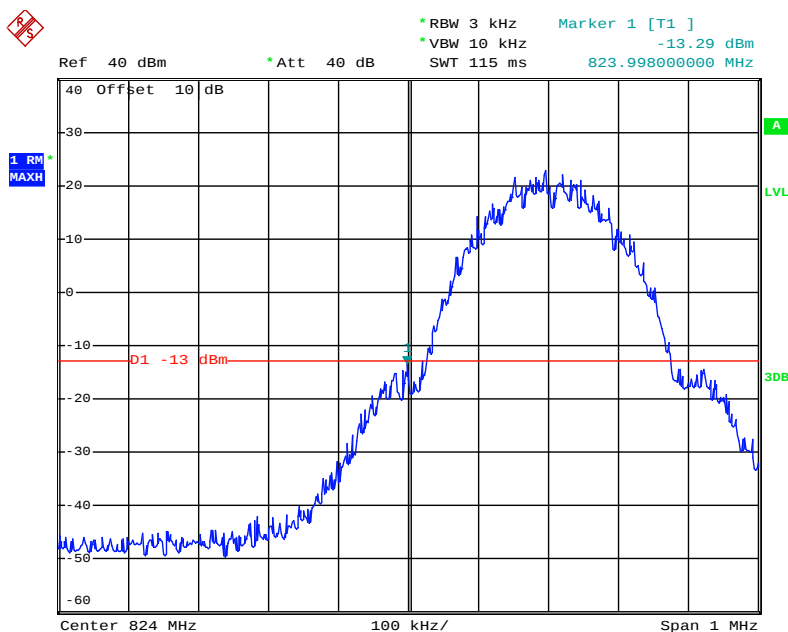

Date: 3.APR.2015 11:55:11


Lowest channel

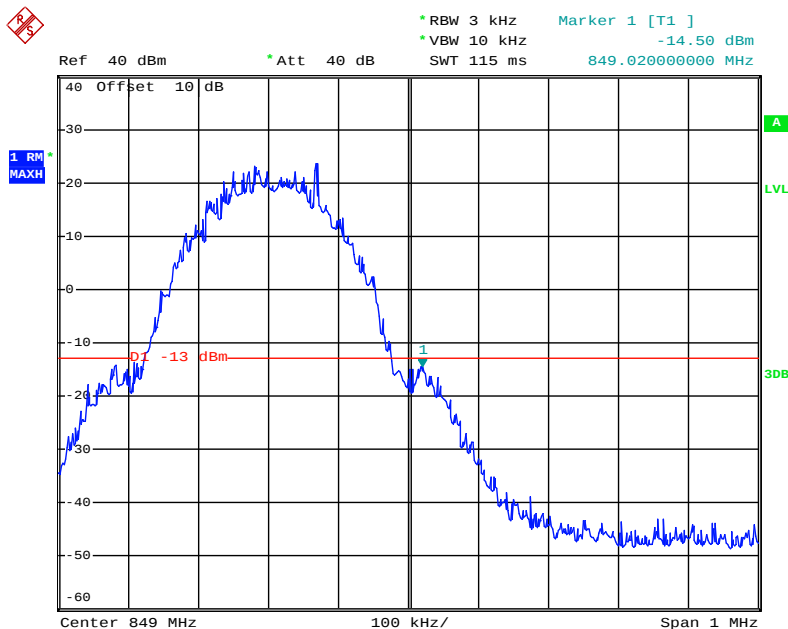

Date: 3.APR.2015 11:56:24


Highest channel

PCS1900

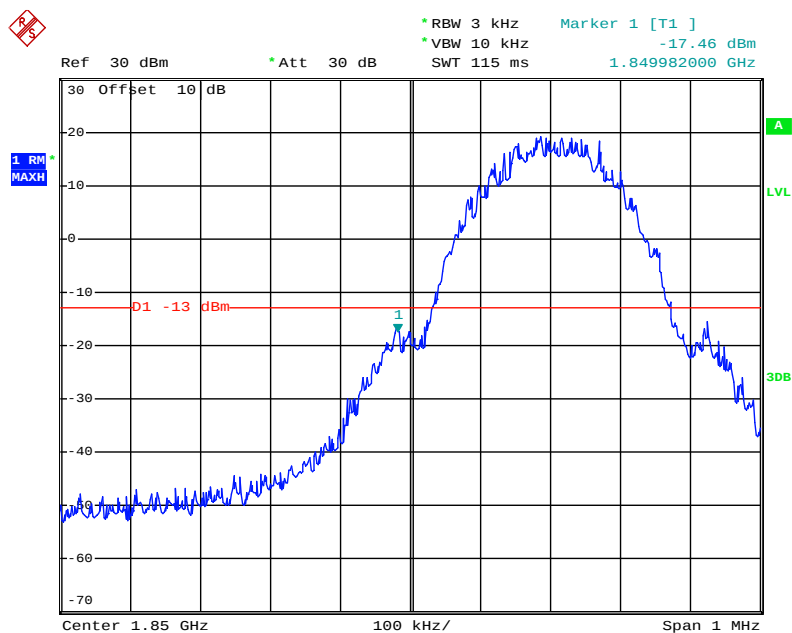

Date: 3.APR.2015 12:13:36


Lowest channel

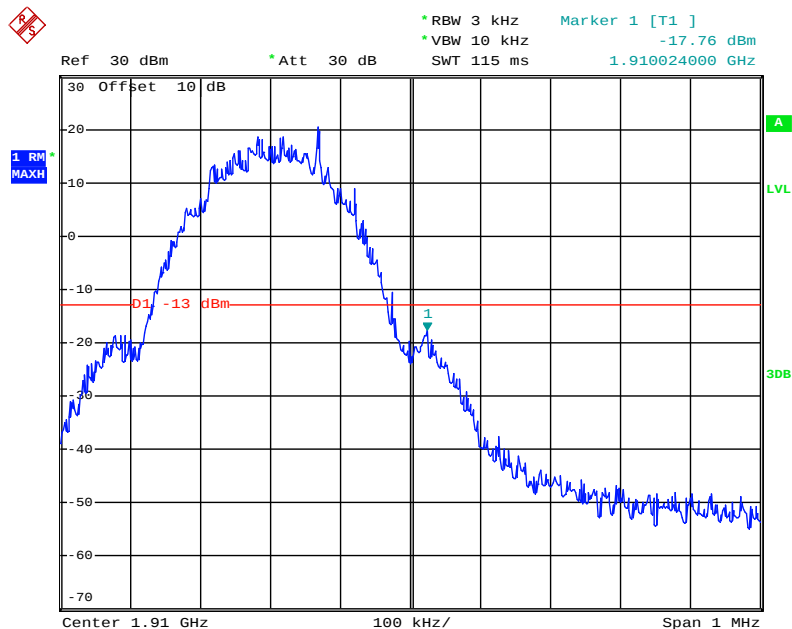

Date: 3.APR.2015 12:14:08


Highest channel

EGPRS850

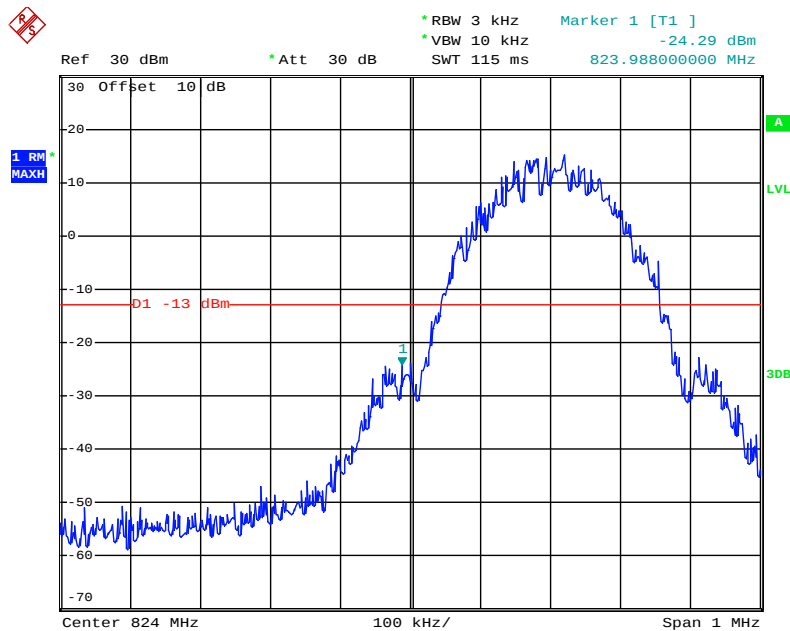

Date: 3.APR.2015 11:59:35


Lowest channel

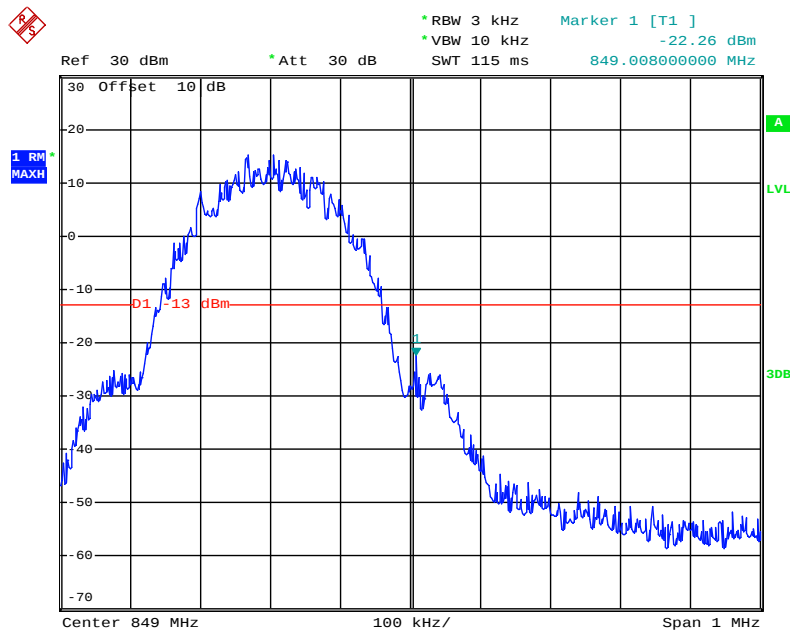

Date: 3.APR.2015 12:00:00


Highest channel

EGPRS1900

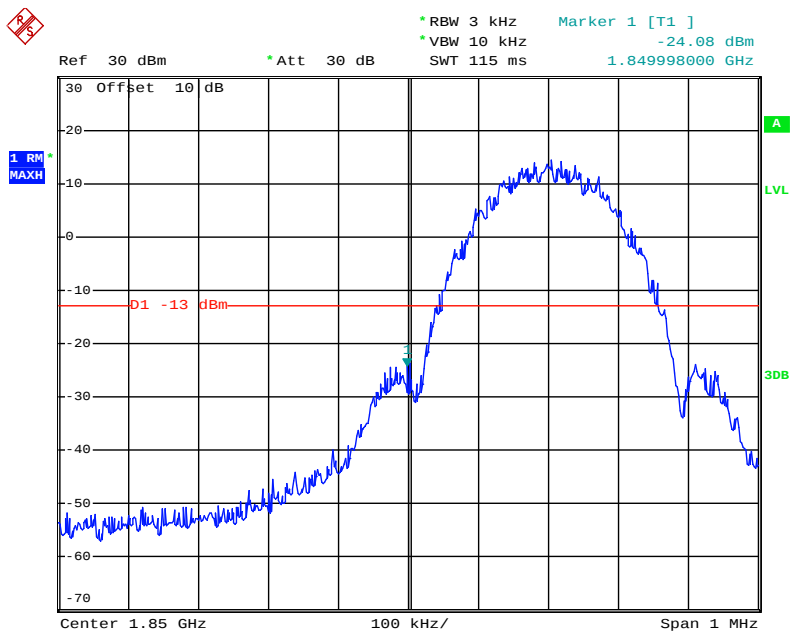

Date: 3.APR.2015 13:42:21


Lowest channel

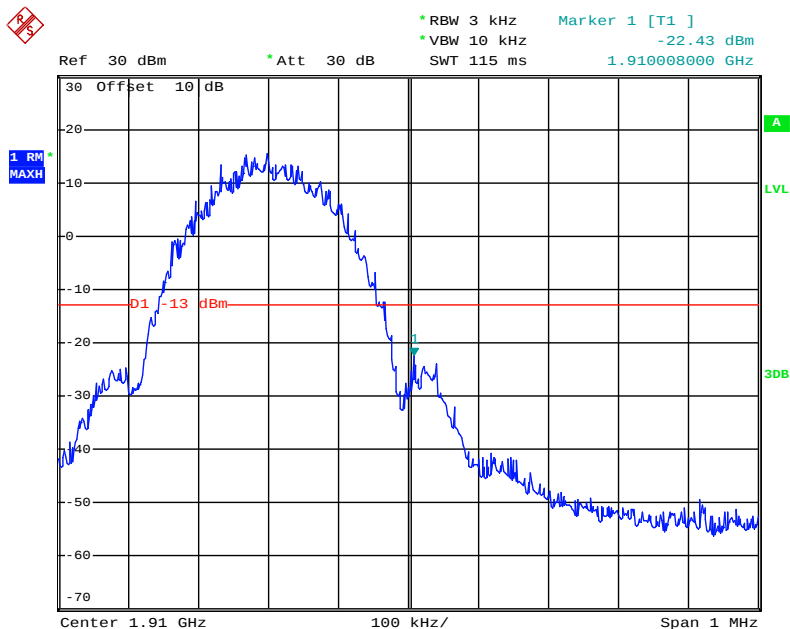

Date: 3.APR.2015 13:41:30


Highest channel

UMTS850 12.2k RMC

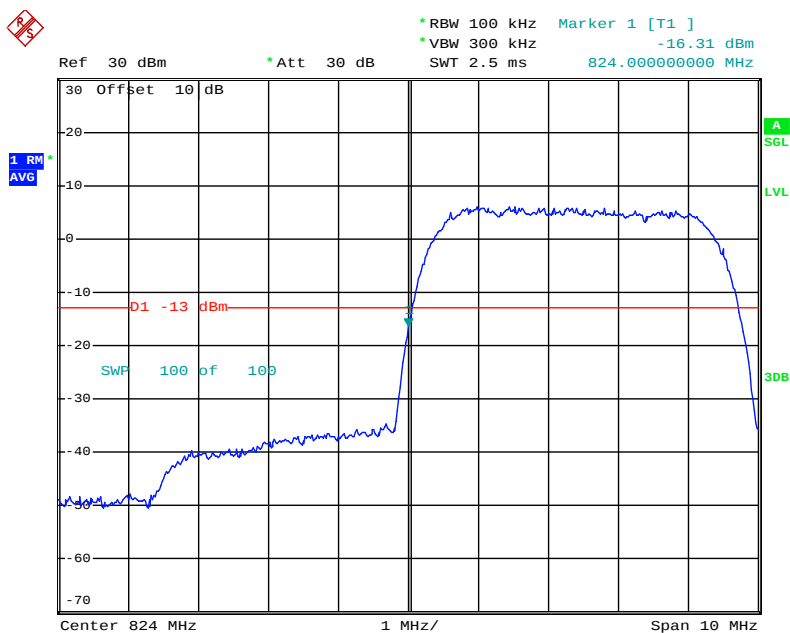

Date: 3.APR.2015 13:56:48


Lowest channel

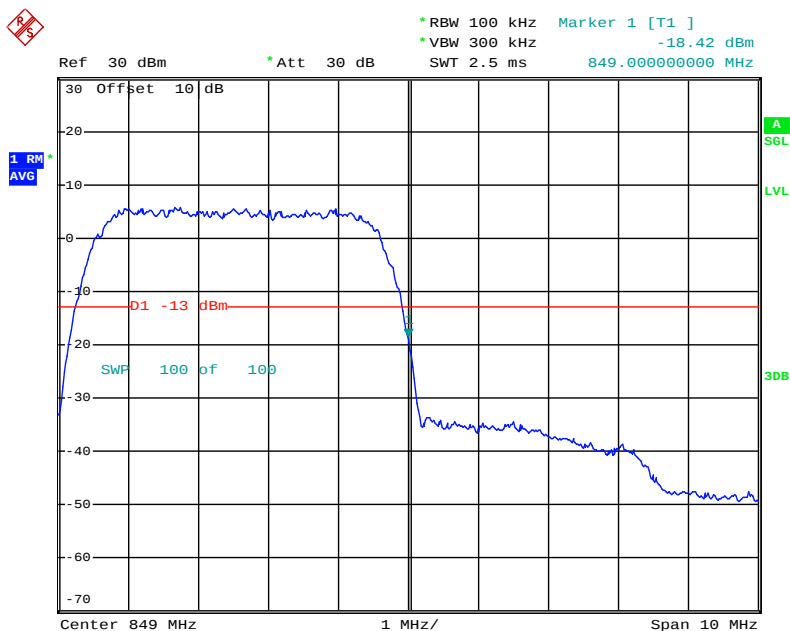

Date: 3.APR.2015 13:55:53


Highest channel

UMTS 1900 12.2k RMC

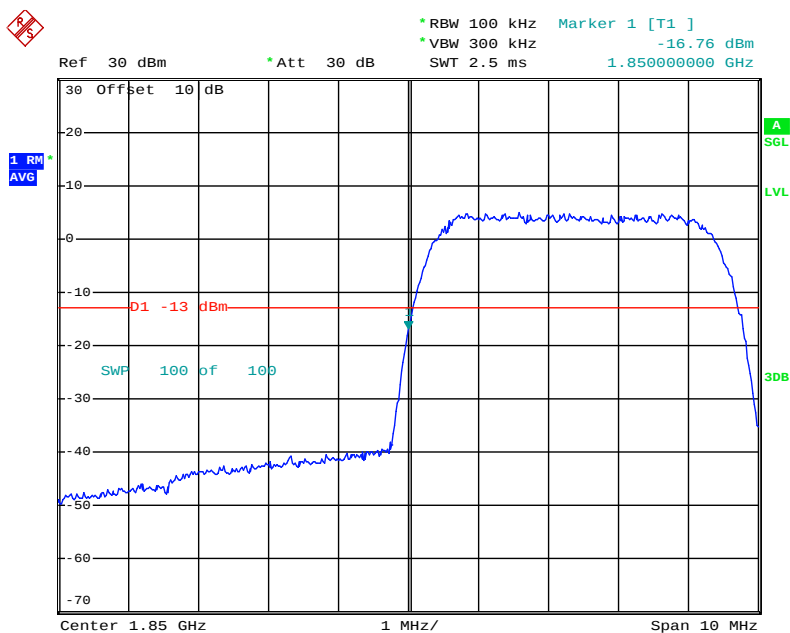

Date: 3.APR.2015 14:05:49




Lowest channel

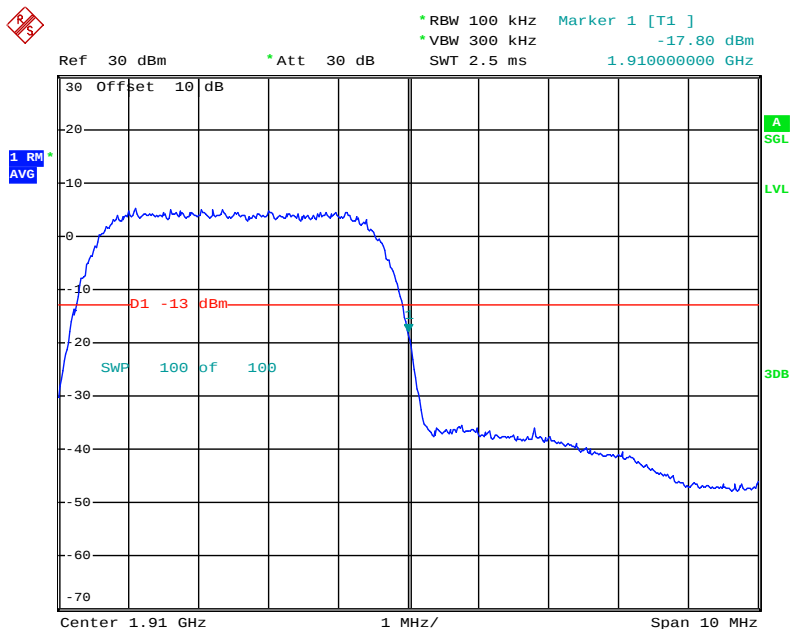

Date: 3.APR.2015 14:05:10

Highest channel

6.10 ERP, EIRP Measurement

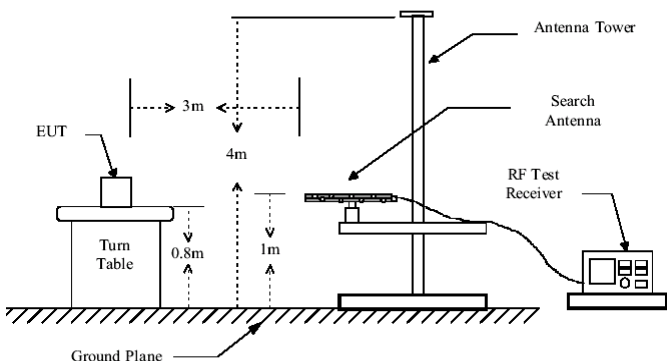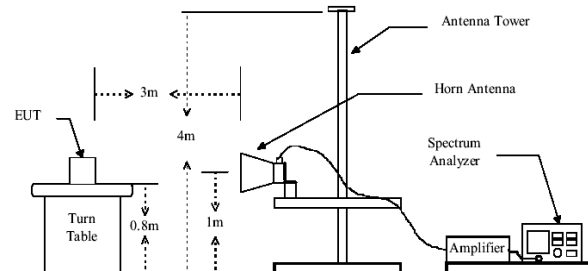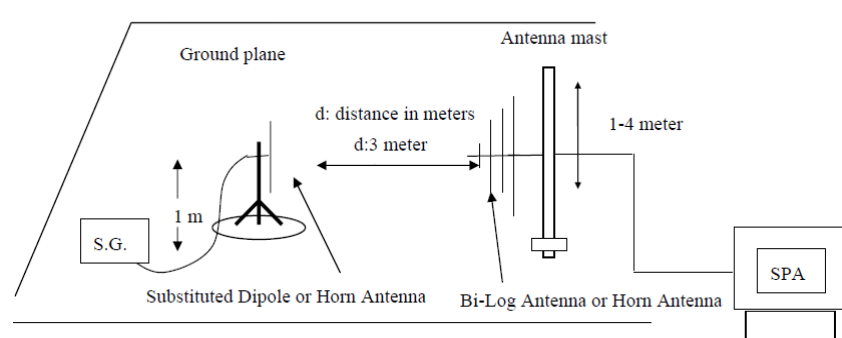Test Requirement:	FCC part 22.913(a) and FCC part 24.232(b)
Test Method:	FCC part 2.1046
Limit:	GSM850 7W ERP PCS1900 2W EIRP WCDMA Band V: 7W ERP WCDMA Band II: 2W EIRP
Test setup:	Below 1GHz  Above 1GHz  Substituted method: 

Test Procedure:	1. The EUT was placed on an non-conductive turntable using a non-conductive support. The radiated emission at the fundamental frequency was measured at 3 m with a test antenna and EMI spectrum analyzer. 2. During the measurement, the EUT was communication with the station. The highest emission was recorded with the rotation of the turntable and the lowering of the test antenna from 4m to 1m. The reading was recorded and the field strength (E in dBuV/m) was calculated. 3. ERP in frequency band 824.2 –848.80.8MHz were measured using a substitution method. The EUT was replaced by dipole antenna connected, the S.G. output was recorded and ERP was calculated as follows: $\text{ERP} = \text{S.G. output (dBm)} + \text{Antenna Gain (dBd)} - \text{Cable Loss (dB)}$ 4. EIRP in frequency band 1850.2 –1909.8MHz were measured using a substitution method. The EUT was replaced by or horn antenna connected, the S.G. output was recorded and EIRP was calculated as follows: $\text{EIRP} = \text{S.G. output (dBm)} + \text{Antenna Gain (dBi)} - \text{Cable Loss (dB)}$ 5. The worse case was relating to the conducted output power.
Test Instruments:	Refer to section 5.8 for details
Test mode:	Refer to section 5.3 for details
Test results:	Passed

Measurement Data (worst case)

EUT mode	Channel	EUT Pol.	Antenna Pol.	ERP(dBm)	Limit (dBm)	Result
GSM850	190	H	V	29.66	38.45	Pass
			H	30.69		
		E1	V	29.54		
			H	30.45		
		E2	V	29.48		
			H	30.34		

EUT mode	Channel	EUT Pol.	Antenna Pol.	EIRP(dBm)	Limit (dBm)	Result
PCS1900	512	H	V	30.36	33.00	Pass
			H	25.16		
		E1	V	30.27		
			H	25.11		
		E2	V	30.24		
			H	25.07		




EUT mode	Channel	EUT Pol.	Antenna Pol.	ERP(dBm)	Limit (dBm)	Result
EGPRS850	190	H	V	25.48	38.45	Pass
			H	26.40		
		E1	V	25.43		
			H	26.35		
		E2	V	25.38		
			H	26.30		

EUT mode	Channel	EUT Pol.	Antenna Pol.	EIRP(dBm)	Limit (dBm)	Result
EGPRS1900	810	H	V	27.55	33.00	Pass
			H	23.55		
		E1	V	27.48		
			H	23.50		
		E2	V	27.43		
			H	23.45		

EUT mode	Channel	EUT Pol.	Antenna Pol.	ERP(dBm)	Limit (dBm)	Result
UMTS 850 12.2k RMC	4132	H	V	22.24	38.45	Pass
			H	23.09		
		E1	V	22.20		
			H	22.98		
		E2	V	22.17		
			H	22.95		

EUT mode	Channel	EUT Pol.	Antenna Pol.	EIRP(dBm)	Limit (dBm)	Result
UMTS 1900 12.2k RMC	9262	H	V	25.55	33.00	Pass
			H	19.89		
		E1	V	25.51		
			H	19.84		
		E2	V	25.48		
			H	19.79		

6.11 Field strength of spurious radiation measurement

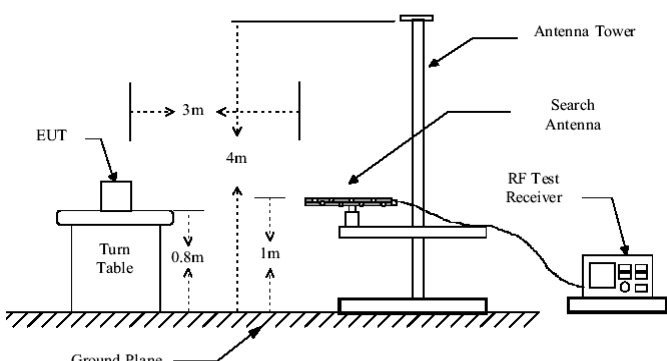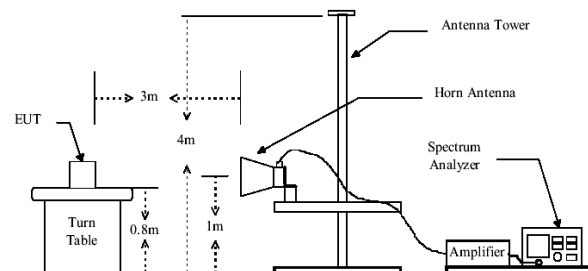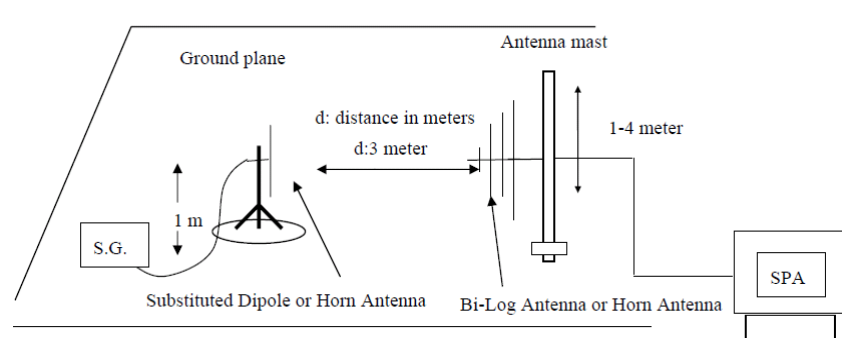Test Requirement:	FCC part 22.917(a) and FCC part 24.238(a)
Test Method:	FCC part 2.1053
Limit:	-13dBm
Test setup:	Below 1GHz  Above 1GHz  Substituted method: 
Test Procedure:	1. The EUT was placed on an non-conductive turntable using a non-conductive support. The radiated emission at the fundamental frequency was measured at 3 m with a test antenna and EMI spectrum analyzer. 2. During the tests, the antenna height and the EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. This maximization process was repeated with the EUT positioned in each of its three orthogonal orientations. 3. The frequency range up to tenth harmonic was investigated for each of three fundamental frequency (low, middle and high channels). Once spurious emission was identified, the power of the emission was determined using the substitution method.

	4. The spurious emissions attenuation was calculated as the difference between radiated power at the fundamental frequency and the spurious emissions frequency. $\text{ERP / EIRP} = \text{S.G. output (dBm)} + \text{Antenna Gain(dB/dBi)} - \text{Cable Loss (dB)}$
Test Instruments:	Refer to section 5.8 for details
Test mode:	Refer to section 5.3 for details. Based on the ERP/EIRP results, we selected GSM850, PCS1900, UMTS RMC 850 and UMTS RMC 1900 for Radiated spurious emission test, other modes were not test.
Test results:	Passed

Measurement Data (worst case)

Test mode:	GSM850		Test channel:	Lowest
Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
	Polarization	Level (dBm)		
1648.40	Vertical	-22.76	-13.00	Pass
2472.60	V	-26.88		
3296.80	V	-33.45		
4121.00	V	-40.34		
1648.40	Horizontal	-27.24	-13.00	Pass
2472.60	H	-24.52		
3296.80	H	-31.69		
4121.00	H	-39.80		
4945.20	H	-38.21		
Test mode:	GSM850		Test channel:	Middle
Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
	Polarization	Level (dBm)		
1673.20	Vertical	-29.11	-13.00	Pass
2509.80	V	-30.51		
3346.40	V	-38.03		
4183.00	V	-46.80		
1673.20	Horizontal	-30.06	-13.00	Pass
2509.80	H	-30.71		
3346.40	H	-36.78		
4183.00	H	-45.38		
Test mode:	GSM850		Test channel:	Highest
Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
	Polarization	Level (dBm)		
1697.60	Vertical	-23.96	-13.00	Pass
2546.40	V	-25.95		
3395.20	V	-34.43		
4244.00	V	-40.81		
1697.60	Horizontal	-24.84	-13.00	Pass
2546.40	H	-28.60		
3395.20	H	-31.82		
4244.00	H	-40.89		

Remark:

1. The emission levels of below 1 GHz are very lower than the limit and not show in test report.

Test mode:	PCS1900		Test channel:	Lowest
Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
	Polarization	Level (dBm)		
3700.40	Vertical	-50.25	-13.00	Pass
5550.60	V	-38.52		
7400.80	V	-49.36		
9251.00	V	-44.65		
3700.40	Horizontal	-48.91	-13.00	Pass
5550.60	H	-38.22		
7400.80	H	-33.02		
9251.00	H	-32.36		
Test mode:	PCS1900		Test channel:	Middle
Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
	Polarization	Level (dBm)		
3760.00	Vertical	-50.63	-13.00	Pass
5640.00	V	-49.92		
7520.00	V	-40.35		
3760.00	Horizontal	-47.38	-13.00	Pass
5640.00	H	-29.73		
7520.00	H	-33.32		
Test mode:	PCS1900		Test channel:	Highest
Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
	Polarization	Level (dBm)		
3819.60	Vertical	-49.76	-13.00	Pass
5729.40	V	-43.29		
3819.60	Horizontal	-46.39	-13.00	Pass
5729.40	H	-31.56		
7639.20	H	-48.32		
9549.00	H	26.87		

Remark:

1. The emission levels of below 1 GHz are very lower than the limit and not show in test report.

Test mode:	UMTS850 12.2k RMC		Test channel:	Lowest
Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
	Polarization	Level (dBm)		
1652.80	Vertical	-28.67	-13.00	Pass
2479.20	V	-32.70		
3305.60	V	-39.10		
1652.80	Horizontal	-36.96	-13.00	Pass
2479.20	H	-35.46		
3305.60	H	-40.41		
Test mode:	UMTS850 12.2k RMC		Test channel:	Middle
Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
	Polarization	Level (dBm)		
1673.20	Vertical	-38.06	-13.00	Pass
2509.80	V	-43.28		
3346.40	V	-46.97		
1673.20	Horizontal	-44.91	-13.00	Pass
2509.80	H	-43.99		
3346.40	H	-46.15		
Test mode:	UMTS850 12.2k RMC		Test channel:	Highest
Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
	Polarization	Level (dBm)		
1693.20	Vertical	-42.14	-13.00	Pass
2539.80	V	-47.54		
3386.40	V	-48.34		
1693.20	Horizontal	-45.77	-13.00	Pass
2539.80	H	-47.69		
3386.40	H	-47.74		

Remark:


1. The emission levels of below 1 GHz are very lower than the limit and not show in test report.

Test mode:	UMTS 1900 12.2k RMC		Test channel:	Lowest
Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
	Polarization	Level (dBm)		
3704.80	Vertical	-48.18	-13.00	Pass
5557.20	V	-43.95		
3704.80	Horizontal	-52.69	-13.00	Pass
5557.20	H	-44.20		
Test mode:	UMTS 1900 12.2k RMC		Test channel:	Middle
Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
	Polarization	Level (dBm)		
3760.00	Vertical	-51.71	-13.00	Pass
5640.00	V	-44.90		
3760.00	Horizontal	-51.12	-13.00	Pass
5640.00	H	-44.16		
Test mode:	UMTS 1900 12.2k RMC		Test channel:	Highest
Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
	Polarization	Level (dBm)		
3815.20	Vertical	-51.26	-13.00	Pass
5722.80	V	-45.11		
3815.20	Horizontal	-51.25	-13.00	Pass
5722.80	H	-45.66		

Remark:

1. The emission levels of below 1 GHz are very lower than the limit and not show in test report.

6.12 Frequency stability V.S. Temperature measurement

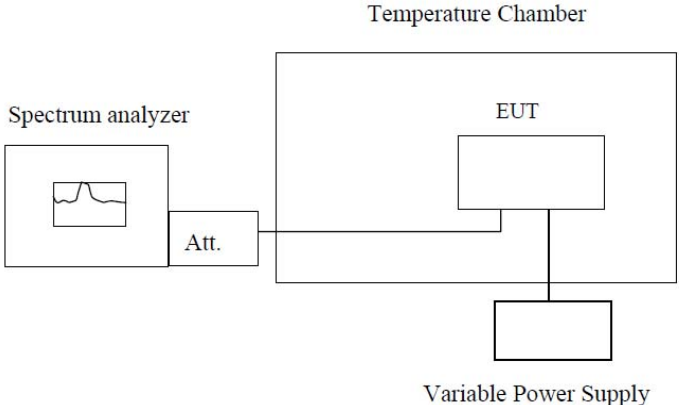Test Requirement:	FCC Part 2.1055(a)(1)(b)
Test Method:	FCC Part 2.1055(a)(1)(b)
Limit:	2.5 ppm
Test setup:	 Note : Measurement setup for testing on Antenna connector
Test procedure:	1. The equipment under test was connected to an external DC power supply and input rated voltage. 2. RF output was connected to a frequency counter or spectrum analyzer via feed through attenuators. 3. The EUT was placed inside the temperature chamber. 4. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and measure EUT 25°C operating frequency as reference frequency. 5. Turn EUT off and set the chamber temperature to -30°C. After the temperature stabilized for approximately 30 minutes recorded the frequency. 6. Repeat step measure with 10°C increased per stage until the highest temperature of +50°C reached
Test Instruments:	Refer to section 5.8 for details
Test mode:	Refer to section 5.3 for details
Test results:	Passed
Remark:	All three channels of all modulations have been tested, but only the worst channel and the worst modulation show in this test item.


Measurement Data:

Reference Frequency: GSM850 Middle channel=190 channel=836.6MHz					
Power supplied (Vdc)	Temperature (°C)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
3.70	-30	177	0.211571	2.5	Pass
	-20	175	0.209180		
	-10	170	0.203203		
	0	163	0.194836		
	10	152	0.181688		
	20	168	0.200813		
	30	169	0.202008		
	40	155	0.185274		
	50	154	0.184078		
Reference Frequency: PCS1900 Middle channel=661 channel=1880MHz					
Power supplied (Vdc)	Temperature (°C)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
3.70	-30	179	0.095213	2.5	Pass
	-20	166	0.088298		
	-10	163	0.086702		
	0	159	0.084574		
	10	160	0.085106		
	20	152	0.080851		
	30	150	0.079787		
	40	170	0.090426		
	50	174	0.092553		

Reference Frequency: EGPRS850 Middle channel=190 channel=836.6MHz					
Power supplied (Vdc)	Temperature (℃)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
3.70	-30	169	0.202008	2.5	Pass
	-20	152	0.181688		
	-10	126	0.150610		
	0	134	0.160172		
	10	148	0.176907		
	20	133	0.158977		
	30	158	0.188860		
	40	150	0.179297		
	50	145	0.173321		
Reference Frequency: EGPRS 1900 Middle channel=661 channel=1880MHz					
Power supplied (Vdc)	Temperature (℃)	Frequency error			Result
		Hz	ppm		
3.70	-30	182	0.096809	2.5	Pass
	-20	174	0.092553		
	-10	170	0.090426		
	0	158	0.084043		
	10	163	0.086702		
	20	128	0.068085		
	30	152	0.080851		
	40	150	0.079787		
	50	147	0.078191		

Reference Frequency: UMTS850 12.2k RMC Middle channel=4183 channel=836.6MHz					
Power supplied (Vdc)	Temperature (°C)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
3.70	-30	130	0.155391	2.5	Pass
	-20	122	0.145828		
	-10	128	0.153000		
	0	126	0.150610		
	10	125	0.149414		
	20	117	0.139852		
	30	119	0.142242		
	40	120	0.143438		
	50	105	0.125508		
Reference Frequency: UMTS1900 12.2k RMC Middle channel=9400 channel=1880MHz					
Power supplied (Vdc)	Temperature (°C)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
3.70	-30	127	0.067553	2.5	Pass
	-20	120	0.063830		
	-10	115	0.061170		
	0	109	0.057979		
	10	107	0.056915		
	20	85	0.045213		
	30	99	0.052660		
	40	106	0.056383		
	50	118	0.062766		

6.13 Frequency stability V.S. Voltage measurement

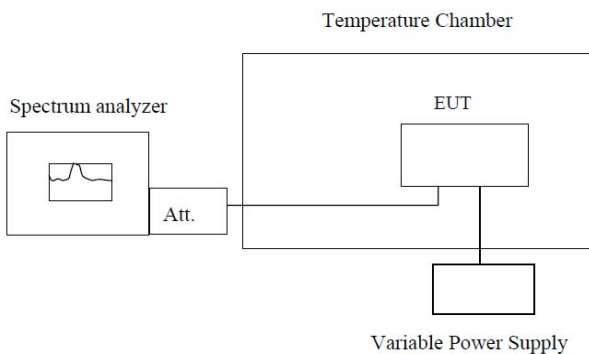Test Requirement:	FCC Part 2.1055(d)(1)(2)
Test Method:	FCC Part 2.1055(d)(1)(2)
Limit:	2.5ppm
Test setup:	 Note : Measurement setup for testing on Antenna connector
Test procedure:	1. Set chamber temperature to 25°C. Use a variable DC power source to power the EUT and set the voltage to rated voltage. 2. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and recorded the frequency. 3. Reduce the input voltage to specify extreme voltage variation (+/- 15%) and endpoint, record the maximum frequency change.
Test Instruments:	Refer to section 5.8 for details
Test mode:	Refer to section 5.3 for details, and all channels have been tested, only shows the worst channel data in this report.
Test results:	Passed

Measurement Data (the worst channel):

Reference Frequency: GSM850 Middle channel=190 channel=836.6MHz					
Temperature (°C)	Power supplied (Vdc)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
25	4.25	127	0.151805	2.5	Pass
	3.70	106	0.126703		
	3.40	97	0.115945		
Reference Frequency: PCS1900 Middle channel=661 channel=1880MHz					
Temperature (°C)	Power supplied (Vdc)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
25	4.25	133	0.070745	2.5	Pass
	3.70	125	0.066489		
	3.40	117	0.062234		
Reference Frequency: EGPRS 850 Middle channel= 190 channel=836.6MHz					
Temperature (°C)	Power supplied (Vdc)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
25	4.25	108	0.129094	2.5	Pass
	3.70	102	0.121922		
	3.40	99	0.118336		
Reference Frequency: EGPRS 1900 Middle channel= 661 channel=1880MHz					
Temperature (°C)	Power supplied (Vdc)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
25	4.25	107	0.056915	2.5	Pass
	3.70	100	0.053191		
	3.40	87	0.046277		

Reference Frequency: UMTS 850 12.2k RMC Middle channel=4183 channel=836.6MHz					
Temperature (°C)	Power supplied (Vdc)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
25	4.25	123	0.147024	2.5	Pass
	3.70	115	0.137461		
	3.40	107	0.127899		
Reference Frequency: UMTS 1900 12.2k RMC Middle channel=9400 channel=1880MHz					
Temperature (°C)	Power supplied (Vdc)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
25	4.25	99	0.052660	2.5	Pass
	3.70	87	0.046277		
	3.40	84	0.044681		