

NCC RADIO TEST REPORT

Product name	液晶顯示器
Applicant	富基電通股份有限公司 AFASTOR CONRPORATION
Manufacture	深圳市兆馳股份有限公司 Shen Zhen MTC Co., LTD
Factory	N/A
Rating(s)	100-240Vac, 50/60Hz, 2.5A, 198W
Trademark	Haier
Model and/or type reference	LE65K6500U, LE65K6000U
Standard	LP0002:2018
Test Result	PASS

Date of receipt : 03-12-2019

Date of Issue : 04-08-2019

signature :




NCC RADIO TEST REPORT

Report Reference No...... : M80620J583-01R3

Compiled by (+ signature) Kevin Bothmann

Approved by (+ signature)..... Jay Gandhi

Date of issue..... : 2019-04-08



Applicant's name : AFASTOR CONRPORATION

Address : 6F-3, NO. 432, SEC. 1, KEELUNG RD. SINYI DIST., TAIPEI CITY 110, TAIWAN

Manufacture's Name : Shen Zhen MTC Co., LTD

Address : MTC Industry Park, 1st Lilang Road, Xialilang community, Nanwan street, Longgang district, Shenzhen, China

Factory's Name : N/A

Address : N/A

Test specification:

Standard : LP0002: 2018

Test procedure : EIA 603、ANSI、FCC/47 CFR/2.1046、2.1047、2.1049、2.1051、2.1053 and 2.1055

Non-standard test method..... : N/A

Test item description

Product name : 液晶顯示器

Trademark : Haier

Model and/or type reference : LE65K6500U, LE65K6000U

Rating(s) : 100-240Vac, 50/60Hz, 2.5A, 198W

Testing Laboratory information:

Testing Laboratory Name : Electro Magnetic Test, Inc.

Address : 1547 Plymouth Street, Mountain View, CA 94043

CAB Identifier Number : US0036

Tel : (650) 965-4000

Fax : (650) 965-3000

E-mail : jgandhi@emtlabs.com

Testing.....:

Date of receipt of test item..... : March 12, 2019

Date (s) of performance of tests..... : March 19~ April 3, 2018 & November 23~December 18, 2018 & March 12, 2019 ~ April 8, 2019

Date of Issue : April 8, 2019

Test Result..... : **Pass**

GENERAL REPORT SUMMARY

This electromagnetic emission test report is generated by Electro Magnetic Test, Inc., which is an independent testing and consulting firm. The test report is based on testing performed Electro Magnetic Test, Inc. personnel according to the measurement procedure described in the test specification given below and in the "Test Procedures" section of this report.

The measurement data and conclusions appearing herein relate only to the sample tested and this report may not be reproduced in any form unless done so in full.

This report must not be used to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the U.S. Federal Government.

Electro Magnetic Test, Inc. is recognized by the following agencies for performing EMI/EMC testing:

COUNTRY	AGENCY	IDENTIFYING #
USA	Federal Communications Commission (FCC) (EMT's test site is recognized by the FCC)	Registration Number: 90576
USA, Canada, Taiwan, Australia/New Zealand, European Community	National Voluntary Lab Accreditation Program (NVLAP) (EMT is accredited by NVLAP. A copy of the NVLAP Scope Of Accreditation is available upon request.)	Lab Code: 200147-0
Canada	Industry Canada	File No.: IC 2804
Japan	Voluntary Control Council For Interference (VCCI)	See Below
	Open Field Test Site "A"	R-589
	Mains Conducted Emissions Test Site "A"	C-604
	Telecom Conducted Emissions Test Site "A"	T-1655
	3 Meter Semi-Anechoic Chamber Site "E"	R-3227
	3 Meter Semi-Anechoic Chamber Site "E" (1GHz – 6GHz)	G-219
	Mains Conducted Emissions Test Site "E"	C-35793
	Telecom Conducted Emissions Test Site "E"	T-1715
Korea	Ministry of Information and Communication's Radio Research Laboratory (RRL) under the Asia Pacific Economic Cooperation (APEC) Mutual Recognition Arrangement (A copy of the Scope Of Accreditation is available upon request)	US0036
Taiwan	Bureau Of Standards, Metrology and Inspection (BSMI)	Reference Number: SL2-IN-E-1024
Australia / New Zealand	Australian Communications Authority (AUSTEL)	*

***THESE AGENCIES DO NOT ISSUE AN IDENTIFYING NUMBER TO TEST LABS.**

Table of Contents	Page
GENERAL REPORT SUMMARY	3
1 . SUMMARY OF TEST RESULTS	6
1.1 MEASUREMENT UNCERTAINTY	8
2 . GENERAL INFORMATION	9
2.1 GENERAL DESCRIPTION OF EUT	9
2.2 DESCRIPTION OF TEST MODES	11
2.3 TABLE OF PARAMETERS OF TEXT SOFTWARE SETTING	11
2.4 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	12
2.5 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)	13
3 . EMC EMISSION TEST	16
3.1 CONDUCTED EMISSION MEASUREMENT	16
3.1.1 POWER LINE CONDUCTED EMISSION LIMITS	16
3.1.2 TEST PROCEDURE	17
3.1.3 DEVIATION FROM TEST STANDARD	17
3.1.4 TEST SETUP	17
3.1.5 TEST RESULTS	18
3.2 RADIATED EMISSION MEASUREMENT	22
3.2.1 RADIATED EMISSION LIMITS	22
3.2.2 TEST PROCEDURE	23
3.2.3 TEST SETUP	24
3.2.4 EUT OPERATING CONDITIONS	24
3.2.5 TEST RESULTS (BETWEEN 30 – 1000 MHZ)	25
3.2.6 TEST RESULTS (ABOVE 1000 MHZ)	33
3.2.7 TEST RESULTS (RESTRICTED BANDS REQUIREMENTS)	111
4 . OCCUPIED BANDWIDTH TEST	131
4.1 APPLIED PROCEDURES / LIMIT	131
4.1.1 TEST PROCEDURE	131
4.1.2 TEST SETUP	131
4.1.3 EUT OPERATION CONDITIONS	131
4.1.4 TEST RESULTS	132
5 . POWER DENSITY	140
5.1 APPLIED PROCEDURES / LIMIT	140
5.1.1 TEST PROCEDURE	140
5.1.2 TEST SETUP	140
5.1.3 EUT OPERATION CONDITIONS	140
5.1.4 TEST RESULTS	141

Table of Contents	Page
6 . PEAK OUTPUT POWER TEST	149
6.1 APPLIED PROCEDURES / LIMIT	149
6.1.1 TEST PROCEDURE	149
6.1.2 DEVIATION FROM STANDARD	149
6.1.3 TEST SETUP	149
6.1.4 EUT OPERATION CONDITIONS	149
6.1.5 TEST RESULTS	150
7 . ANTENNA CONDUCTED SPURIOUS EMISSION	158
7.1 APPLIED PROCEDURES / LIMIT	158
7.1.1 TEST PROCEDURE	158
7.1.2 TEST SETUP	158
7.1.3 EUT OPERATION CONDITIONS	158
7.1.4 TEST RESULTS	159
9. ANTENNA REQUIREMENT	167
9.1 STANDARD REQUIREMENT	167
9.2 EUT ANTENNA	167
10. EUT TEST PHOTO	168
11. APPENDIX-Photographs of EUT Constructional Details	

1. SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:

LP0002 : 2018 revised			
Standard Section	Test Item	Judgment	Remark
2.3	Conducted Emission	PASS	None
3.10.1(5)/2.8	Radiated Spurious Emission	PASS	None
3.10.1(2)	Peak Output Power	PASS	None
3.10.1(6.2.1)	6dB Occupied Bandwidth	PASS	None
3.10.1(6.2.2)	Power Density	PASS	None
3.10.1(5)/2.8	Restricted Bands	PASS	None
3.10.1(5)/2.8	Antenna Conducted Spurious Emission	PASS	None
3.10.1(3)	Antenna Requirement	PASS	None
3.10.1(5)/2.3/2.8	Receiver Emissions	PASS	None

NOTE:

- (1) "N/A" denotes test is not applicable in this test report.
- (2) Original report please refer to M80620J583-01 on 04-08-2018.
- (3) The applicant updates the COF board and the T-CON board. The magnetic ring on the power cord has been removed from the inside photo. After reassessment, the spurious emission were re-tested and recorded in this report. Take the internal photos again and add it.
- (4) The applicant added a power board and base. After reassessment, the conducted emission and the spurious emission were re-tested and recorded in this report. Take the internal photos again and add it.

No.	Part No.	Manufacturer	Model	Date	Note
original	power board	Shenzhen MTC Co. Ltd	TV5502-ZC02-01	/	/
Updated Add	power board	Shenzhen MTC Co. Ltd	TV6505-ZC02-01	2019-4	New power board (different from the transformer in the original report).
original	Base	/	4356	/	/
Updated Add	Base	/	5063	2019-4	The shape is a little different.

1.1 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 %.

No.	Item	Uncertainty
1	Conducted Emission Test	1.38dB
2	Radiated Emission Test	3.17dB
3	RF power,conducted	0.16dB
4	Spurious emissions,conducted	0.21dB
5	All emissions,radiated(<1G)	4.68dB
6	All emissions,radiated(>1G)	4.89dB

2. GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF EUT

Equipment	液晶顯示器	
Trade Name	Haier	
Model Name	LE65K6500U, LE65K6000U	
OEM Brand/Model Name	N/A	
Product Description	The EUT is a 液晶顯示器	
	Operation Frequency:	2412~2462 MHz@802.11b/g/n20 2422~2452 MHz@802.11n40
	Modulation Type:	BPSK/QPSK16-QAM/64-QAM
	Bit Rate of Transmitter	802.11b: 1/2/5.5/11Mbps 802.11g: 6/9/12/18/24/36/48/54Mbps 802.11n: up to 450Mbps
	Number Of Channel	Please see Note 2.
	Antenna Designation:	PIFA Antenna
	Antenna Gain(Peak)	0.6 dBi
	Output Power:	802.11b: 17.20dBm 802.11g: 20.77dBm 802.11n20: 19.39dBm 802.11n40: 18.99dBm
Channel List	Please refer to the Note 2.	
Power Rating	100-240Vac, 50/60Hz, 2.5A, 198W	
Connecting I/O Port(s)	Please refer to the User's Manual	
Products Covered	N/A	
EUT Modification(s)	The model No. between LE65K6500U and LE65K6000U only shell color is different.	

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.

2.

Channel List							
802.11b/ g/ n(20M)							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
01	2412	05	2432	09	2452	/	/
02	2417	06	2437	10	2457	/	/
03	2422	07	2442	11	2462	/	/
04	2427	08	2447	/	/	/	/

Channel List							
802.11n(40M)							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
3	2422	7	2442	/	/	/	/
4	2427	8	2447	/	/	/	/
5	2432	9	2452	/	/	/	/
6	2437	/	/	/	/	/	/

3.

Table for Filed Antenna

Ant	Manufacturer	Model Name	Antenna Type	Connector	Gain (dBi)	NOTE
	SHENZHEN B&T TECHNOLOGY Co.,Ltd	F88ETUM35_A NTENNA	PIFA Antenna	N/A	0.6dBi	N/A

2.2 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Mode	Description
Mode 1	802.11b: All Rate
Mode 2	802.11g: All Rate
Mode 3	802.11n(20M): All Rate
Mode 4	802.11n(40M): All Rate

For Conducted Emission	
Final Test Mode	Description
TX	TX(worst case)
RX	RX(worst case)

For Radiated Emission	
Final Test Mode	Description
RX	RX(worst case)
TX	802.11b: Rate 1Mbps
TX	802.11g: Rate 6Mbps
TX	802.11n(20M) : Rate 6.5Mbps
TX	802.11n(40M) : Rate 13.5Mbps

Note:


(1) The measurements are performed at the highest, middle, lowest available channels.

2.3 TABLE OF PARAMETERS OF TEXT SOFTWARE SETTING

During testing channel & power controlling software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product power parameters.

Test software Version	Test program: Wifi transmit		
Frequency	2412 MHz	2437 MHz	2462 MHz
Frequency	2422 MHz	2437 MHz	2452 MHz

2.4 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

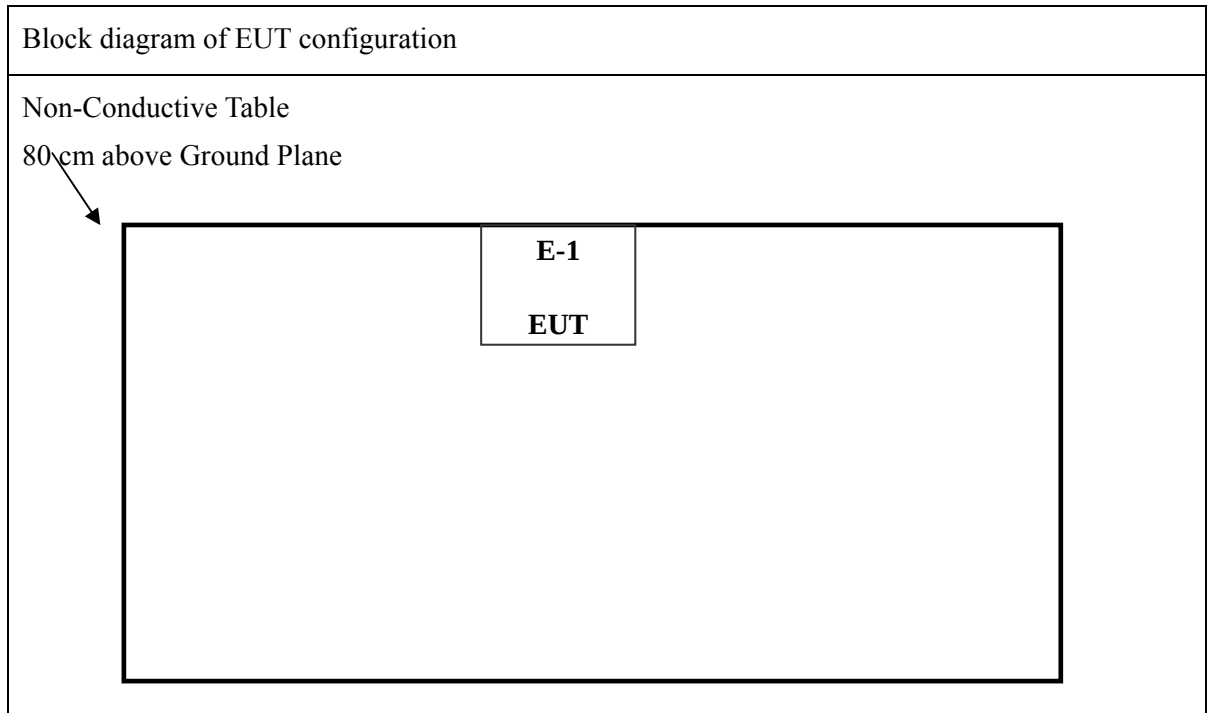

2.5 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	FCC ID	Series No.	Note
E-1	液晶顯示器	N/A	LE65K6000U	N/A	N/A	EUT

Item	Shielded Type	Ferrite Core	Length	Note
N/A	N/A	N/A	N/A	N/A

Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.
- (3) “YES” means “shielded” or “with ferrite core”;”NO” means “unshielded” or”without ferrite core”

2.5.1 EQUIPMENTS LIST FOR ALL TEST ITEMS

EQUIPMENT TYPE	MANU-FACTURER	MODEL NUMBER	SERIAL NUMBER	CAL. DATE	CAL. CYCLE
Spectrum Analyzer	Hewlett Packard	8566B	3013A07296	April 29, 2019	1 Year
RF Preselector	Hewlett Packard	85685A	3010A01157	April 29, 2019	1 Year
Quasi-Peak Adapter	Hewlett Packard	85650	2521A00584	April 29, 2019	1 Year
Preamplifier	Com Power	PA-102	1482	April 29, 2019	1 Year
RF Attenuator	Mini-Circuits	CAT-10	Asset #1000	December 8, 2019	1 Year
LISN	Com Power	LI-200	12012	September 10, 2019	1 Year
LISN	Com Power	LI-200	12214	September 10, 2019	1 Year
LISN	Com Power	LI-200	1767	September 10, 2019	1 Year
LISN	Com Power	LI-200	1768	September 10, 2019	1 Year
Biconical Antenna	Com Power	AB-100	01557	December 29, 2018	1 Year
Log Periodic Antenna	Com Power	AL-100	16037	December 22, 2018	1 Year
Horn Antenna	Com Power	AHA-118	711054	December 22, 2018	1 Year
Antenna Mast	Com Power	AM-400	N/A	N/A	N/A
Turntable	Com Power	TT-100	N/A	N/A	N/A
Computer	Dell, Inc.	DHS	DNSV641	N/A	N/A
Printer	Hewlett Packard	C8124A	CN39B2234T	N/A	N/A
Plotter	Hewlett Packard	7470A	2308A96499	N/A	N/A

EMI Test Equipment (Continued)

EQUIPMENT TYPE	MANU-FACT URER	MODEL NUMBER	SERIAL NUMBER	CAL. DATE	CAL. CYCLE
EMI Receiver	Rohde & Schwarz	ESU40	100127	June 12, 2019	1 Year
BiConiLog Antenna	ETS-Lindgren	3142D	00102183	August 14, 2019	1 Year
Horn Antenna	ETS-Lindgren	3117	00109294	May 6, 2019	1 Year
Preamplifier	Rohde & Schwarz	TS-PR18	100056	June 12, 2019	1 Year
Antenna Mast	ETS-Lindgren	2175	00095727	N/A	N/A
Turntable	ETS-Lindgren	2187-3.0	00118231	N/A	N/A
Computer	Acer	Aspire 8930	85100050123	N/A	N/A
Multi-Function Controller	ETS-Lindgren	2090	00102270	N/A	N/A
Loop Antenna	ARA	PLA-1030/B	1029	May 19, 2019	1 Year

3. EMC EMISSION TEST

3.1 CONDUCTED EMISSION MEASUREMENT

3.1.1 POWER LINE CONDUCTED EMISSION Limits (Frequency Range 150KHz-30MHz)

FREQUENCY (MHz)	Class A (dBuV)		Class B (dBuV)		Standard
	Quasi-peak	Average	Quasi-peak	Average	
0.15 -0.5			66 - 56 *	56 - 46 *	CISPR
0.50 -5.0			56.00	46.00	CISPR
5.0 -30.0			60.00	50.00	CISPR

0.15 -0.5			66 - 56 *	56 - 46 *	LP0002
0.50 -5.0			56.00	46.00	LP0002
5.0 -30.0			60.00	50.00	LP0002

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.

The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz


3.1.2 TEST PROCEDURE

- a. The EUT was placed 0.4 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item –EUT Test Photos.

3.1.3 DEVIATION FROM TEST STANDARD

No deviation

3.1.4 TEST SETUP

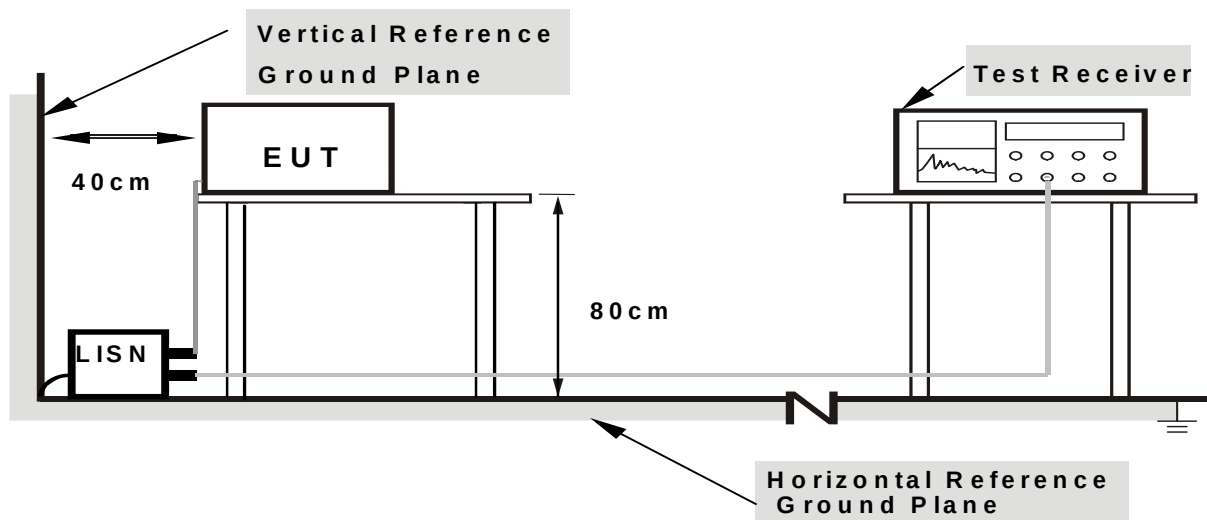

Note: 1.Support units were connected to second LISN.

2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes


3.1.5 TEST RESULTS

EUT :	液晶顯示器	Model Name. :	LE65K6500U
Temperature :	26 °C	Relative Humidity :	54%
Pressure :	1010hPa	Test Date :	2018-12-14
Test Mode :	TX 802.11b :Rate 1Mbps (worst case)	Phase :	L
Test Voltage :	AC 110V/60Hz	Power board:	TV5502-ZC02-01

Frequency (MHz)	Factor (dB)	Meter Reading (dBμV)		Emission Level (dBμV)		Limits (dBμV)		Margin (dB)	
		QP	Average	QP	Average	QP	Average	QP	Average
0.1500	35.45	13.03	19.62	55.07	32.65	65.99	56.00	-10.92	-23.35
0.3180	20.90	8.10	19.60	40.50	27.70	59.76	49.76	-19.26	-22.06
0.4900	27.15	12.23	19.53	46.68	31.76	56.17	46.17	-9.49	-14.41
0.7260	26.48	12.94	19.60	46.08	32.54	56.00	46.00	-9.92	-13.46
2.6619	24.80	11.03	19.72	44.52	30.75	56.00	46.00	-11.48	-15.25
8.8900	28.45	17.86	20.03	48.48	37.89	60.00	50.00	-11.52	-12.11

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = LISN factor + Cable Loss + Pulse limiter.

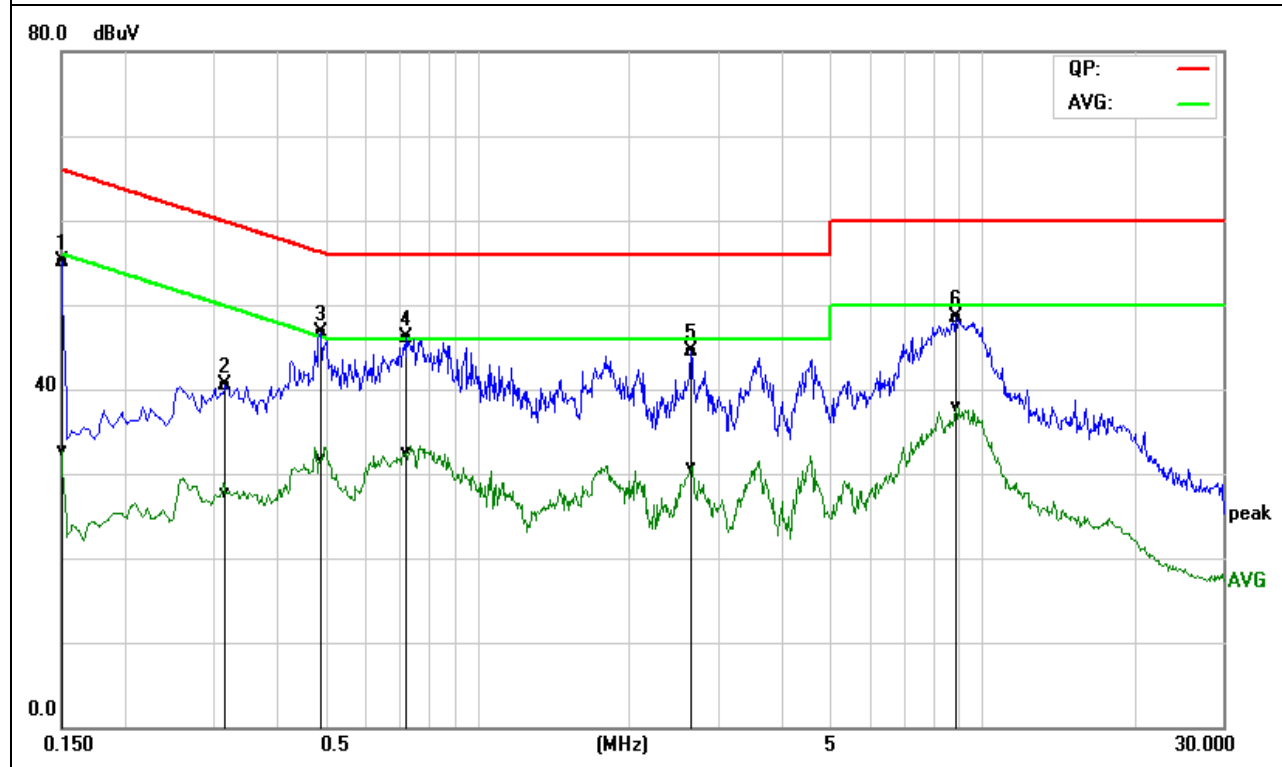


EUT :	液晶顯示器	Model Name. :	LE65K6500U
Temperature :	26 °C	Relative Humidity :	54%
Pressure :	1010hPa	Test Date :	2018-12-14
Test Mode :	TX 802.11b :Rate 1Mbps (worst case)	Phase :	N
Test Voltage :	AC 110V/60Hz	Power board:	TV5502-ZC02-01

Frequency	Factor	Meter Reading (dBμV)		Emission Level (dBμV)		Limits (dBμV)		Margin (dB)	
(MHz)	(dB)	QP	Average	QP	Average	QP	Average	QP	Average
0.3580	23.17	9.05	19.53	42.70	28.58	58.77	48.77	-16.07	-20.19
0.4740	26.29	12.54	19.53	45.82	32.07	56.44	46.44	-10.62	-14.37
0.8500	28.30	13.17	19.58	47.88	32.75	56.00	46.00	-8.12	-13.25
1.8140	24.39	11.70	19.69	44.08	31.39	56.00	46.00	-11.92	-14.61
4.9180	25.00	11.13	19.83	44.83	30.96	56.00	46.00	-11.17	-15.04
8.8620	30.64	19.20	20.03	50.67	39.23	60.00	50.00	-9.33	-10.77

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = LISN factor + Cable Loss + Pulse limiter.

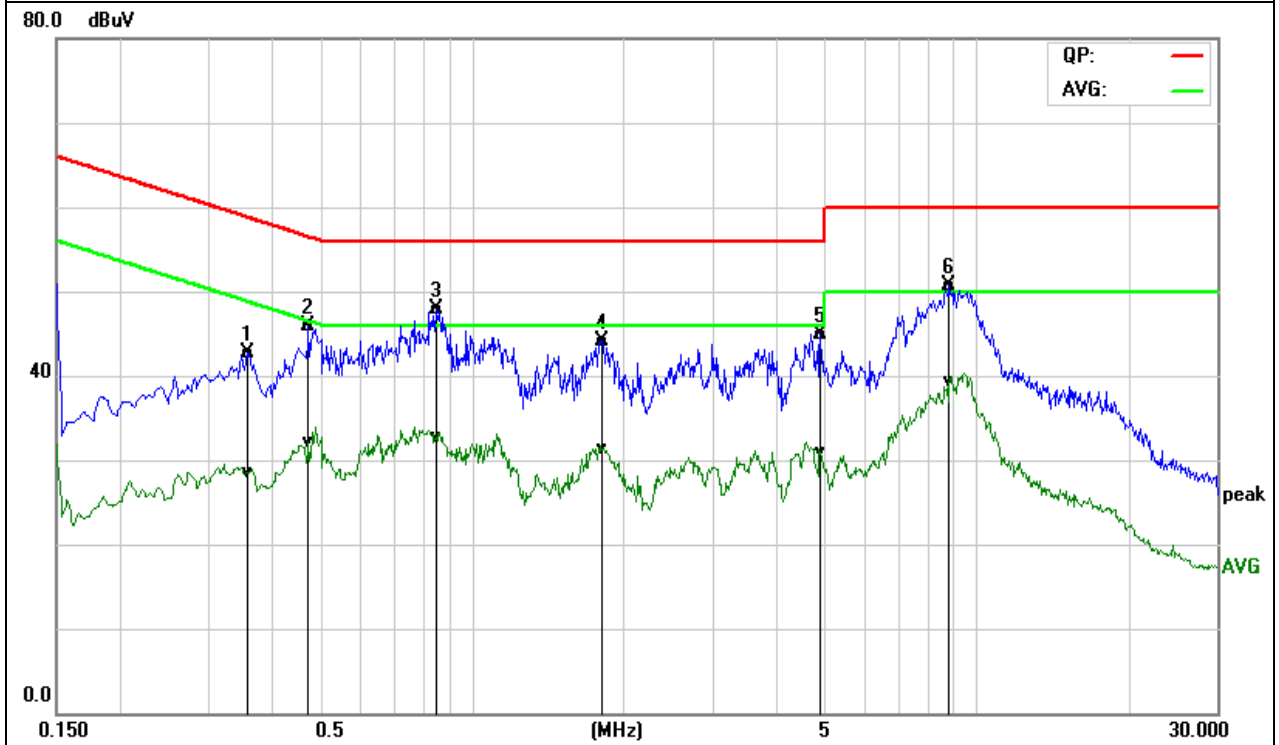


EUT :	液晶顯示器	Model Name. :	LE65K6500U
Temperature :	26 °C	Relative Humidity :	54%
Pressure :	1010hPa	Test Date :	2019-03-31
Test Mode :	TX 802.11b :Rate 1Mbps (worst case)	Phase :	L
Test Voltage :	AC 110V/60Hz	Power board:	TV6505-ZC02-01

Frequency	Factor	Meter Reading (dBμV)		Emission Level (dBμV)		Limits (dBμV)		Margin (dB)	
(MHz)	(dB)	QP	Average	QP	Average	QP	Average	QP	Average
0.1500	35.78	13.63	19.88	55.66	33.51	65.99	56.00	-10.33	-22.49
0.1819	35.00	13.25	19.86	54.86	33.11	64.39	54.40	-9.53	-21.29
0.3420	30.20	9.38	19.84	50.04	29.22	59.15	49.15	-9.11	-19.93
0.5500	29.17	13.91	19.84	49.01	33.75	56.00	46.00	-6.99	-12.25
0.8900	26.35	13.52	19.86	46.21	33.38	56.00	46.00	-9.79	-12.62
7.0540	27.07	14.09	19.94	47.01	34.03	60.00	50.00	-12.99	-15.97

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = LISN factor + Cable Loss + Pulse limiter.

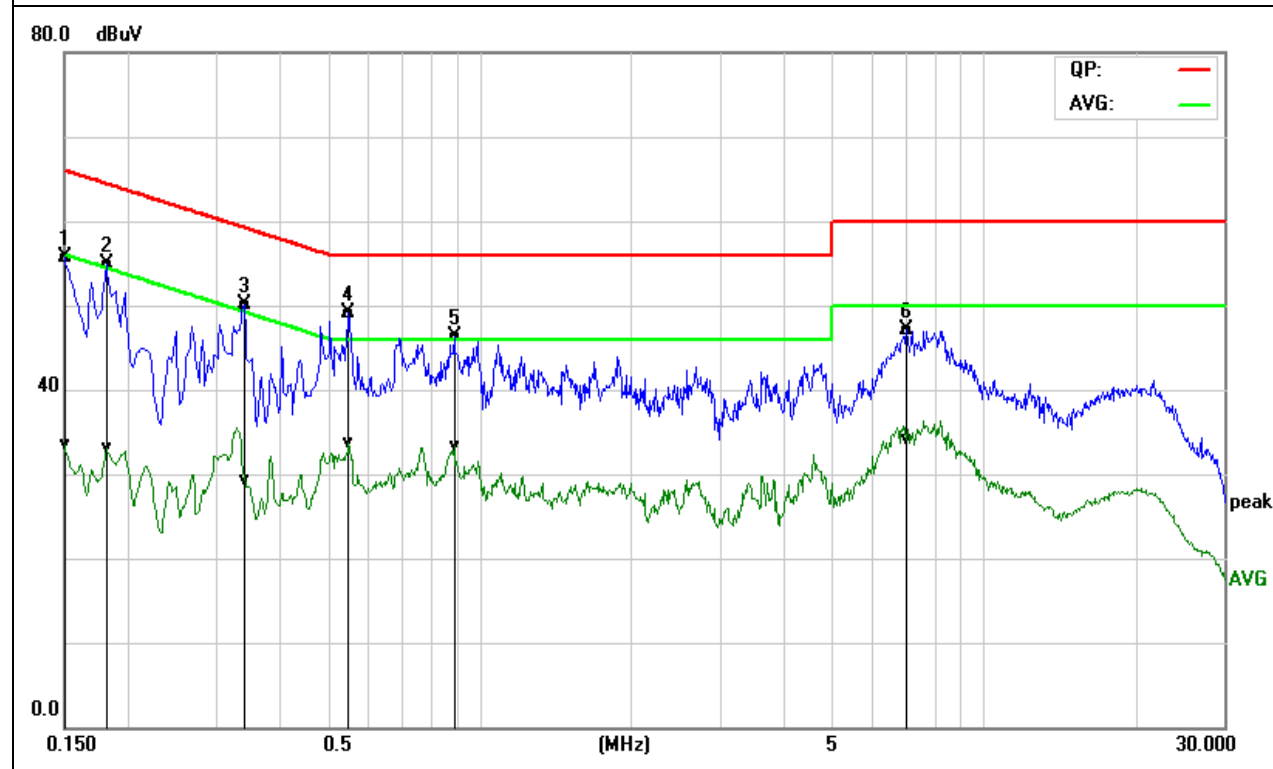


EUT :	液晶顯示器	Model Name. :	LE65K6500U
Temperature :	26 °C	Relative Humidity :	54%
Pressure :	1010hPa	Test Date :	2019-03-31
Test Mode :	TX 802.11b :Rate 1Mbps (worst case)	Phase :	N
Test Voltage :	AC 110V/60Hz	Power board:	TV6505-ZC02-01

Frequency	Factor	Meter Reading (dBμV)		Emission Level (dBμV)		Limits (dBμV)		Margin (dB)	
(MHz)	(dB)	QP	Average	QP	Average	QP	Average	QP	Average
0.1500	33.47	9.73	19.87	53.34	29.60	65.99	56.00	-12.65	-26.40
0.1660	32.88	11.94	19.86	52.74	31.80	65.15	55.16	-12.41	-23.36
0.3300	28.53	14.29	19.84	48.37	34.13	59.45	49.45	-11.08	-15.32
0.5540	26.32	11.89	19.84	46.16	31.73	56.00	46.00	-9.84	-14.27
0.8940	25.99	12.17	19.86	45.85	32.03	56.00	46.00	-10.15	-13.97
7.3220	28.41	15.99	19.95	48.36	35.94	60.00	50.00	-11.64	-14.06

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = LISN factor + Cable Loss + Pulse limiter.

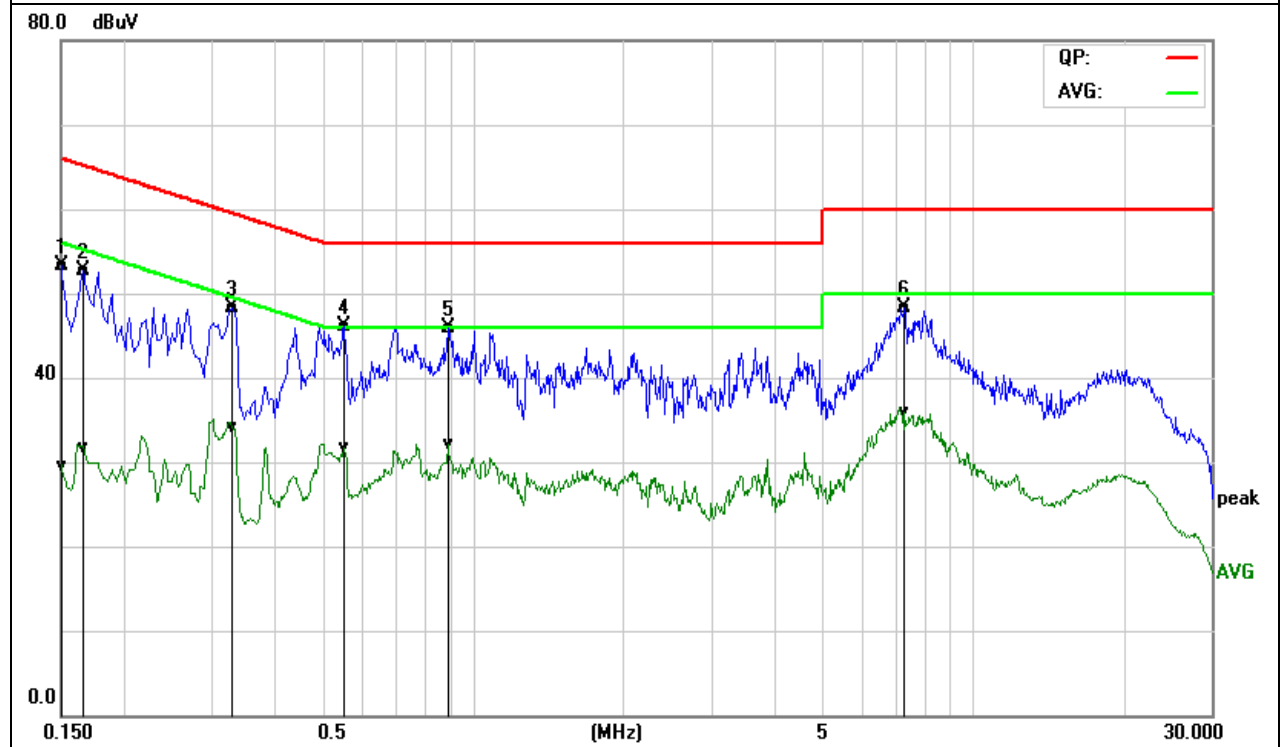

3.2 RADIATED EMISSION MEASUREMENT

3.2.1 RADIATED EMISSION LIMITS (Frequency Range 9kHz-1000MHz)

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 2.7, then the 2.8 limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (microvolt/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

FREQUENCY (MHz)	Class A (dBuV/m) (at 3M)		Class B (dBuV/m) (at 3M)	
	PEAK	AVERAGE	PEAK	AVERAGE
Above 1000	80	60	74	54

Notes:

- (1) The limit for radiated test was performed according to LP0002.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

FREQUENCY RANGE OF RADIATED MEASUREMENT (For unintentional radiators)

Highest frequency generated or Upper frequency of measurement used in the device or on which the device operates or tunes (MHz)	Range (MHz)
Below 1.705	30
1.705 – 108	1000
108 – 500	2000
500 – 1000	5000
Above 1000	5 th harmonic of the highest frequency or 40 GHz, whichever is lower

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RB / VB (emission in restricted band)	1 MHz / 1 MHz for Peak, 1 MHz / 10Hz for Average

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

3.2.2 TEST PROCEDURE

- The measuring distance of at 3 m shall be used for measurements at frequency up to 1GHz. For frequencies above 1GHz, any suitable measuring distance may be used.
- The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter open area test site. The table was rotated 360 degrees to determine the position of the highest radiation.
- The height of the equipment or of the substitution antenna shall be 0.8 m; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.


3.2.5 TEST RESULTS (BETWEEN 30 – 1000 MHz)

Power board: TV6505-ZC02-01

EUT :	液晶顯示器	Model Name. :	LE65K6500U
Temperature :	24 °C	Relative Humidity :	54%
Pressure :	1010 hPa	Test Date :	2018-12-11
Test Mode :	TX 802.11b :Rate 1Mbps (worst case)	Polarization :	Horizontal
Test Power :	AC 110/60Hz		

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
62.0100	60.54	-24.32	36.22	40.00	-3.78	Quasi-Peak
110.5100	56.55	-21.79	34.76	43.50	-8.74	Quasi-Peak
167.7400	61.14	-22.83	38.31	43.50	-5.19	Quasi-Peak
421.8800	48.38	-15.45	32.93	46.00	-13.07	Quasi-Peak
738.1000	49.22	-11.40	37.82	46.00	-8.18	Quasi-Peak
917.5500	48.07	-9.41	38.66	46.00	-7.34	Quasi-Peak


Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

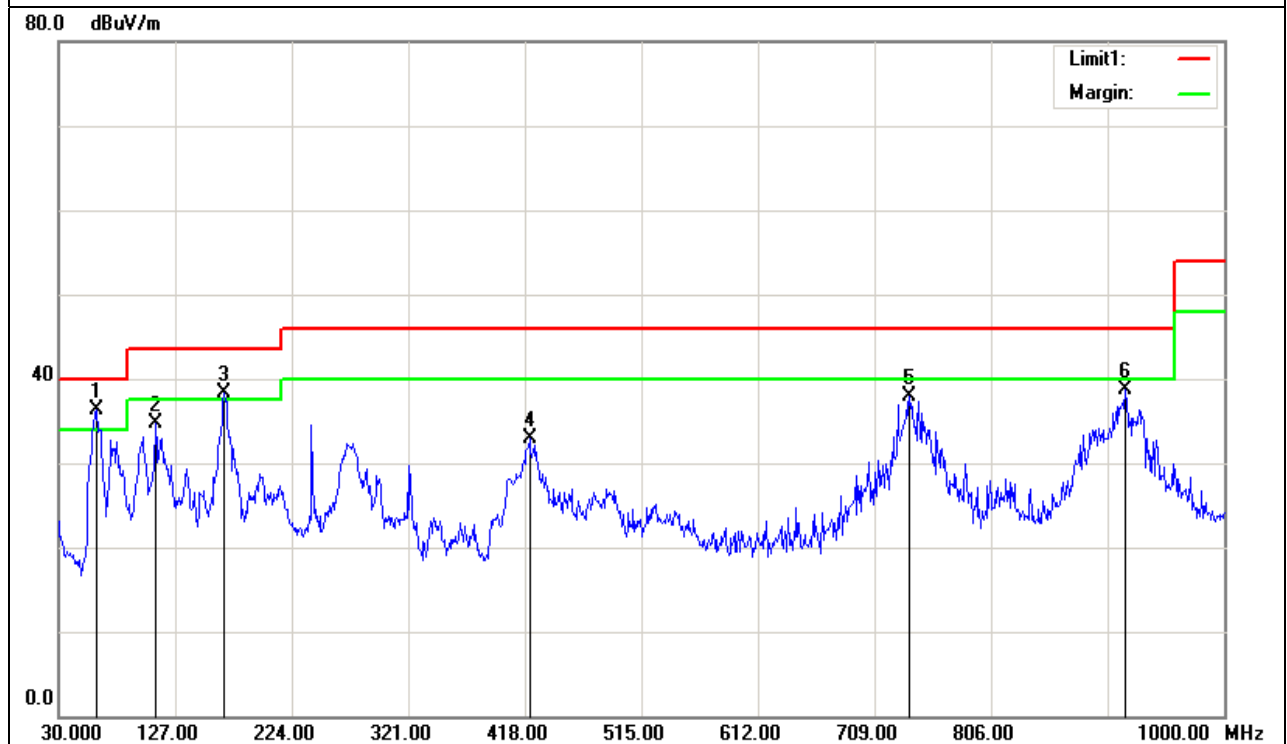

EUT :	液晶顯示器	Model Name. :	LE65K6500U
Temperature :	24 °C	Relative Humidity :	54%
Pressure :	1010 hPa	Test Date :	2018-12-11
Test Mode :	TX 802.11b :Rate 1Mbps (worst case)	Polarization :	Vertical
Test Power :	AC 110/60Hz		

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
38.7300	49.15	-15.79	33.36	40.00	-6.64	Quasi-Peak
64.9200	60.72	-24.82	35.90	40.00	-4.10	Quasi-Peak
99.8400	61.23	-23.70	37.53	43.50	-5.97	Quasi-Peak
242.4300	57.67	-21.40	36.27	46.00	-9.73	Quasi-Peak
738.1000	47.35	-11.40	35.95	46.00	-10.05	Quasi-Peak
888.4500	47.90	-9.91	37.99	46.00	-8.01	Quasi-Peak


Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

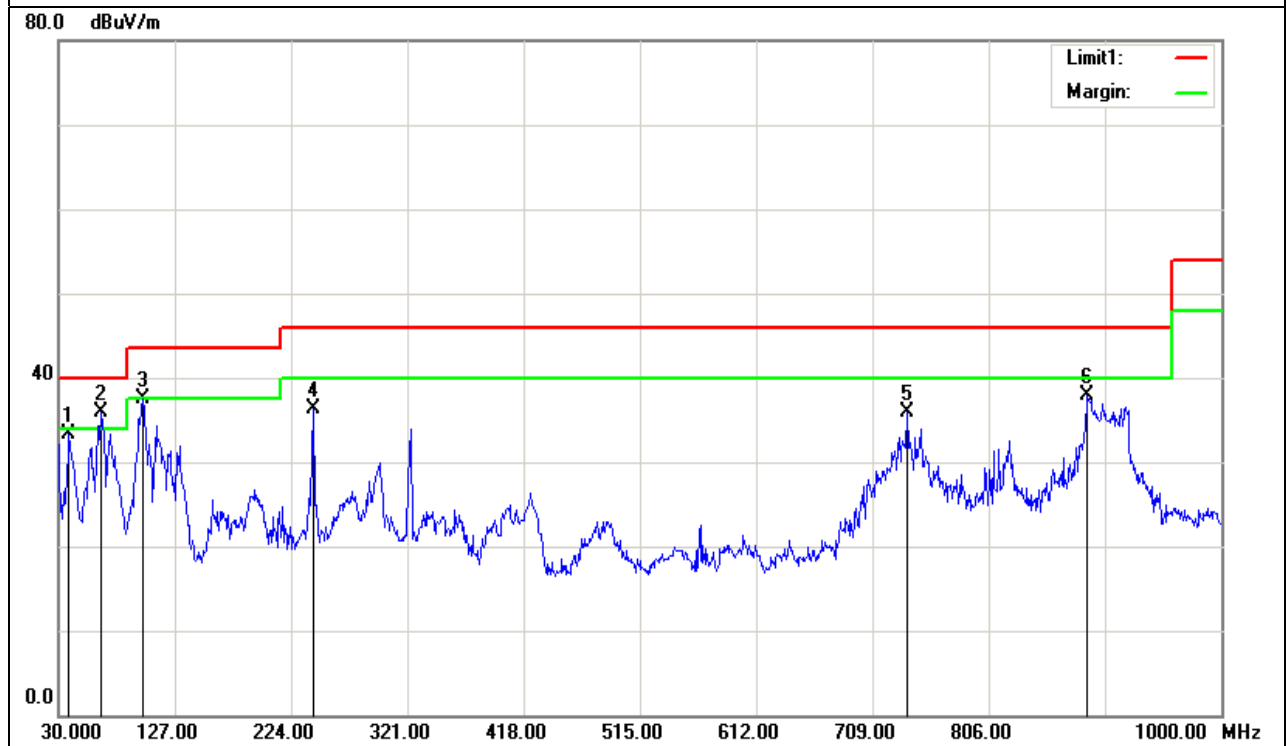

EUT :	液晶顯示器	Model Name. :	LE65K6500U
Temperature :	24 °C	Relative Humidity :	54%
Pressure :	1010 hPa	Test Date :	2018-12-11
Test Mode :	RX 802.11b :Rate 1Mbps (worst case)	Polarization :	Horizontal
Test Power :	AC 110/60Hz		

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
64.9200	60.91	-24.82	36.09	40.00	-3.91	
110.5100	58.96	-21.79	37.17	43.50	-6.33	Quasi-Peak
168.7100	59.60	-22.87	36.73	43.50	-6.77	Quasi-Peak
727.4300	46.72	-11.67	35.05	46.00	-10.95	Quasi-Peak
823.4600	48.17	-10.46	37.71	46.00	-8.29	Quasi-Peak
921.4300	46.78	-9.39	37.39	46.00	-8.61	Quasi-Peak


Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

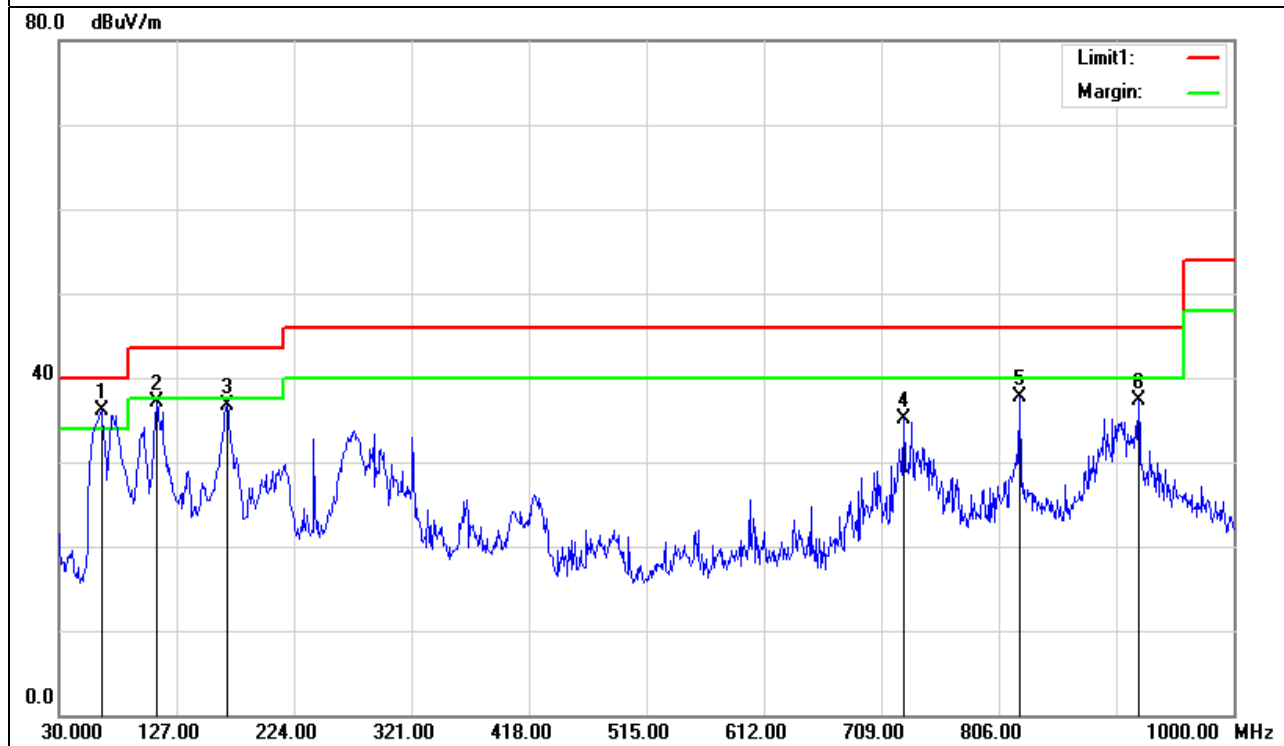

EUT :	液晶顯示器	Model Name. :	LE65K6500U
Temperature :	24 °C	Relative Humidity :	54%
Pressure :	1010 hPa	Test Date :	2018-12-11
Test Mode :	RX 802.11b :Rate 1Mbps (worst case)	Polarization :	Vertical
Test Power :	AC 110/60Hz		

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
64.9200	62.07	-24.82	37.25	40.00	-2.75	
112.4500	58.01	-21.66	36.35	43.50	-7.15	Quasi-Peak
240.4900	60.46	-21.48	38.98	46.00	-7.02	Quasi-Peak
321.0000	53.08	-18.88	34.20	46.00	-11.80	Quasi-Peak
735.1900	52.40	-11.47	40.93	46.00	-5.07	Quasi-Peak
889.4200	45.02	-9.90	35.12	46.00	-10.88	Quasi-Peak

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

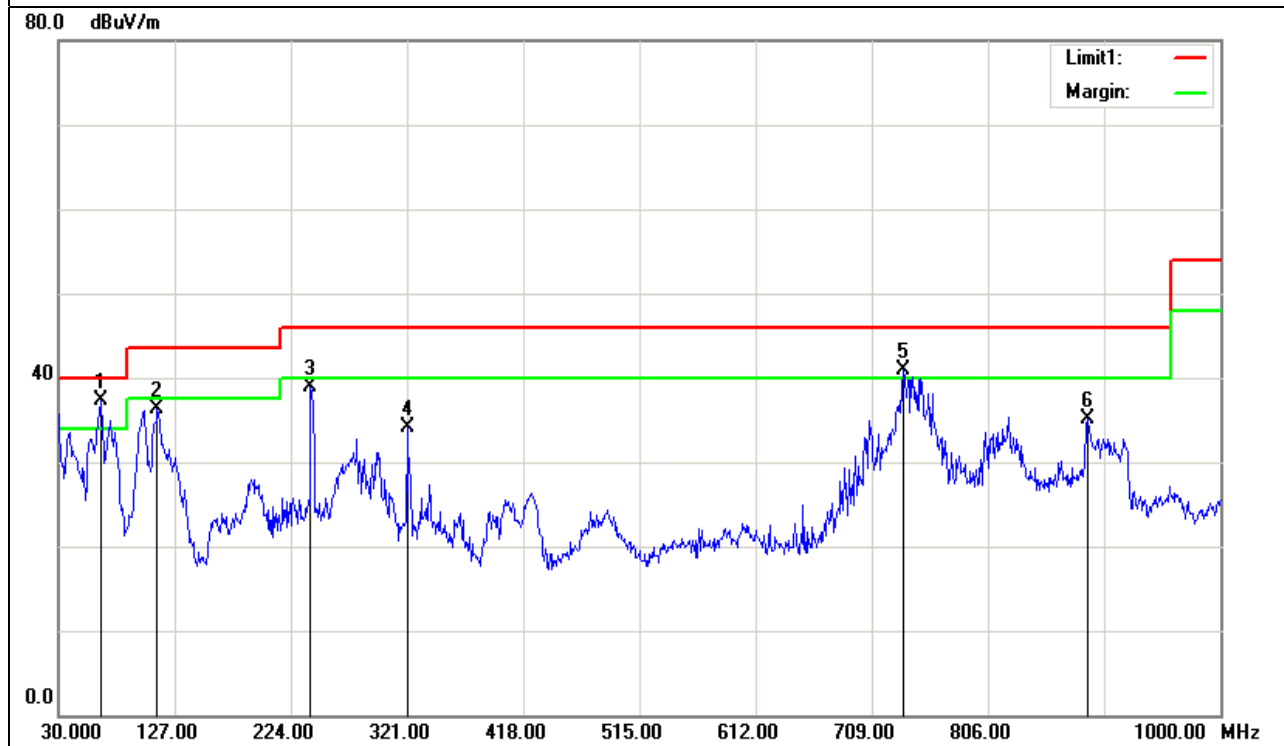


Power board: TV6505-ZC02-01

EUT :	液晶顯示器	Model Name. :	LE65K6500U
Temperature :	26 °C	Relative Humidity :	60%
Pressure :	1010 hPa	Test Date :	2019-03-31
Test Mode :	TX 802.11b :Rate 1Mbps (worst case)	Polarization :	Horizontal
Test Power :	AC 110/60Hz		

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
86.2600	56.99	-20.31	36.68	40.00	-3.32	
97.9000	57.80	-18.80	39.00	43.50	-4.50	Quasi-Peak
106.6300	56.27	-17.88	38.39	43.50	-5.11	Quasi-Peak
181.3200	58.11	-17.01	41.10	43.50	-2.40	Quasi-Peak
695.4200	45.29	-6.42	38.87	46.00	-7.13	Quasi-Peak
805.0300	47.43	-6.90	40.53	46.00	-5.47	Quasi-Peak


Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

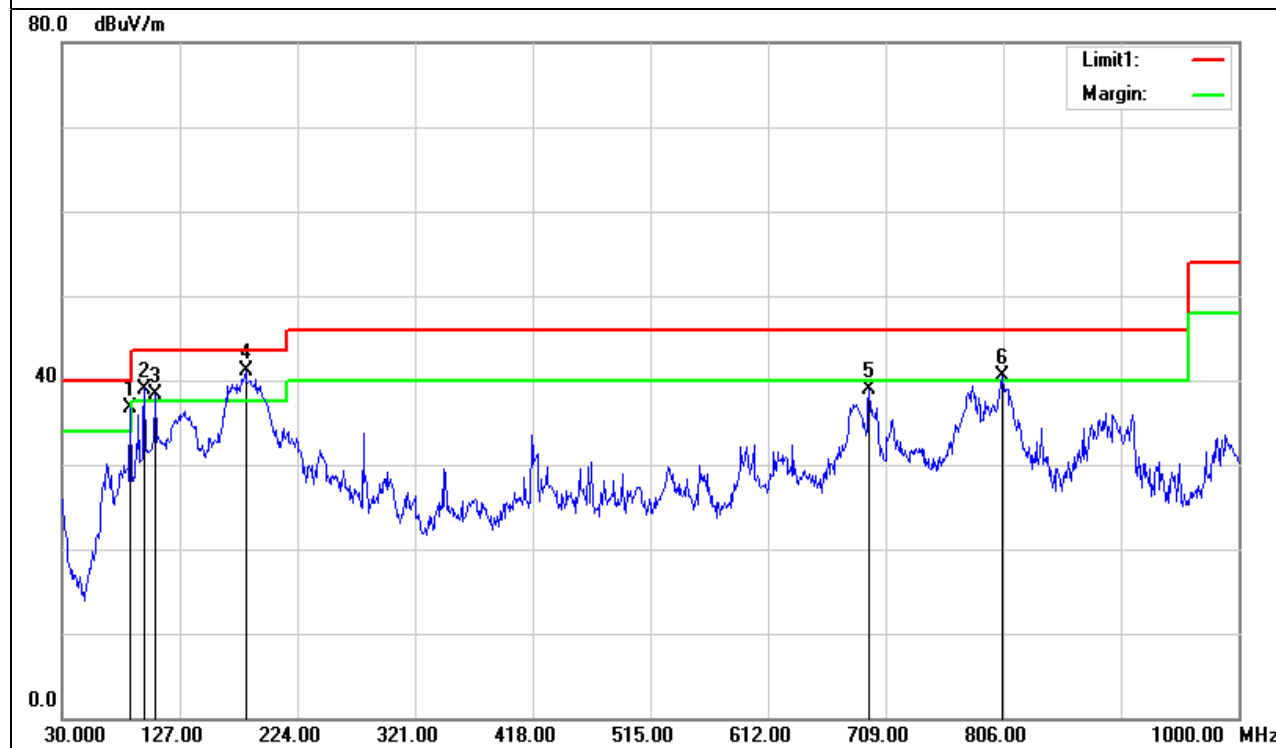

EUT :	液晶顯示器	Model Name. :	LE65K6500U
Temperature :	26 °C	Relative Humidity :	60%
Pressure :	1010 hPa	Test Date :	2019-03-31
Test Mode :	TX 802.11b :Rate 1Mbps (worst case)	Polarization :	Vertical
Test Power :	AC 110/60Hz	Power board:	TV5502-ZC02-01

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
30.0000	51.23	-17.20	34.03	40.00	-5.97	Quasi-Peak
65.8900	51.40	-18.58	32.82	40.00	-7.18	Quasi-Peak
431.5800	54.72	-11.96	42.76	46.00	-3.24	Quasi-Peak
695.4200	44.38	-6.42	37.96	46.00	-8.04	Quasi-Peak
841.8900	44.13	-5.60	38.53	46.00	-7.47	Quasi-Peak
896.2100	43.34	-4.26	39.08	46.00	-6.92	Quasi-Peak


Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

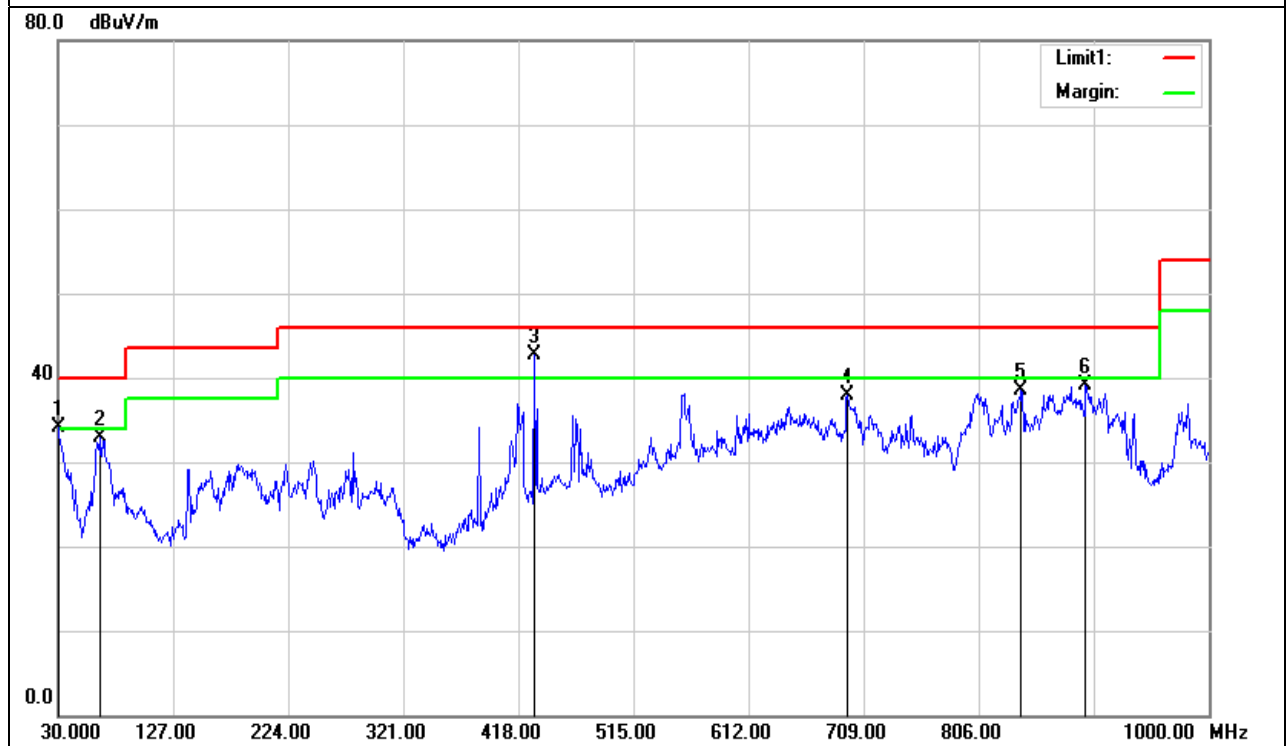

EUT :	液晶顯示器	Model Name. :	LE65K6500U
Temperature :	26 °C	Relative Humidity :	60%
Pressure :	1010 hPa	Test Date :	2019-03-31
Test Mode :	RX 802.11b :Rate 1Mbps (worst case)	Polarization :	Horizontal
Test Power :	AC 110/60Hz		

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
134.7600	52.47	-16.12	36.35	43.50	-7.15	Quasi-Peak
179.3800	56.94	-16.77	40.17	43.50	-3.33	Quasi-Peak
548.9500	50.70	-10.04	40.66	46.00	-5.34	Quasi-Peak
695.4200	45.85	-6.42	39.43	46.00	-6.57	Quasi-Peak
778.8400	47.14	-7.05	40.09	46.00	-5.91	Quasi-Peak
910.7600	40.80	-4.14	36.66	46.00	-9.34	Quasi-Peak


Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

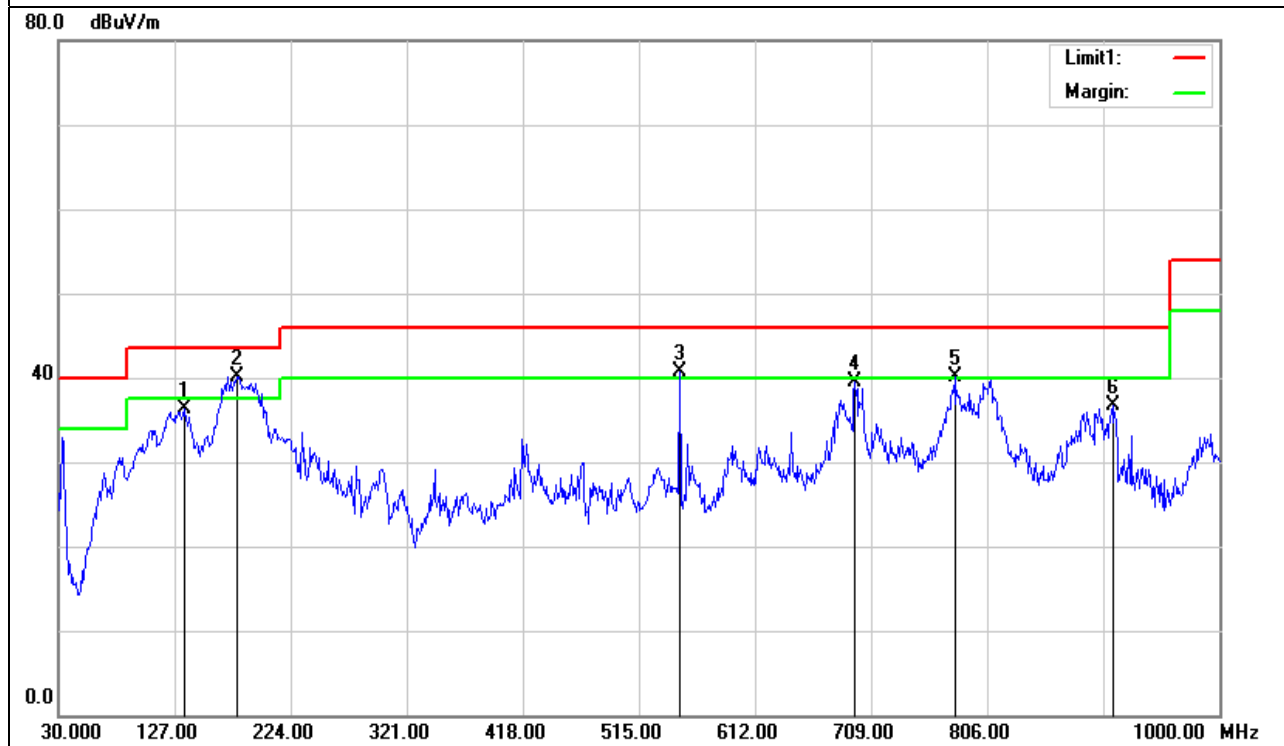

EUT :	液晶顯示器	Model Name. :	LE65K6500U
Temperature :	26 °C	Relative Humidity :	60%
Pressure :	1010 hPa	Test Date :	2019-03-31
Test Mode :	RX 802.11b :Rate 1Mbps (worst case)	Polarization :	Vertical
Test Power :	AC 110/60Hz		

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
30.9700	50.54	-17.31	33.23	40.00	-6.77	Quasi-Peak
67.8300	51.34	-18.76	32.58	40.00	-7.42	Quasi-Peak
417.0300	49.39	-12.58	36.81	46.00	-9.19	Quasi-Peak
561.5600	49.40	-9.65	39.75	46.00	-6.25	Quasi-Peak
807.9400	45.60	-6.80	38.80	46.00	-7.20	Quasi-Peak
897.1800	43.32	-4.24	39.08	46.00	-6.92	Quasi-Peak

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

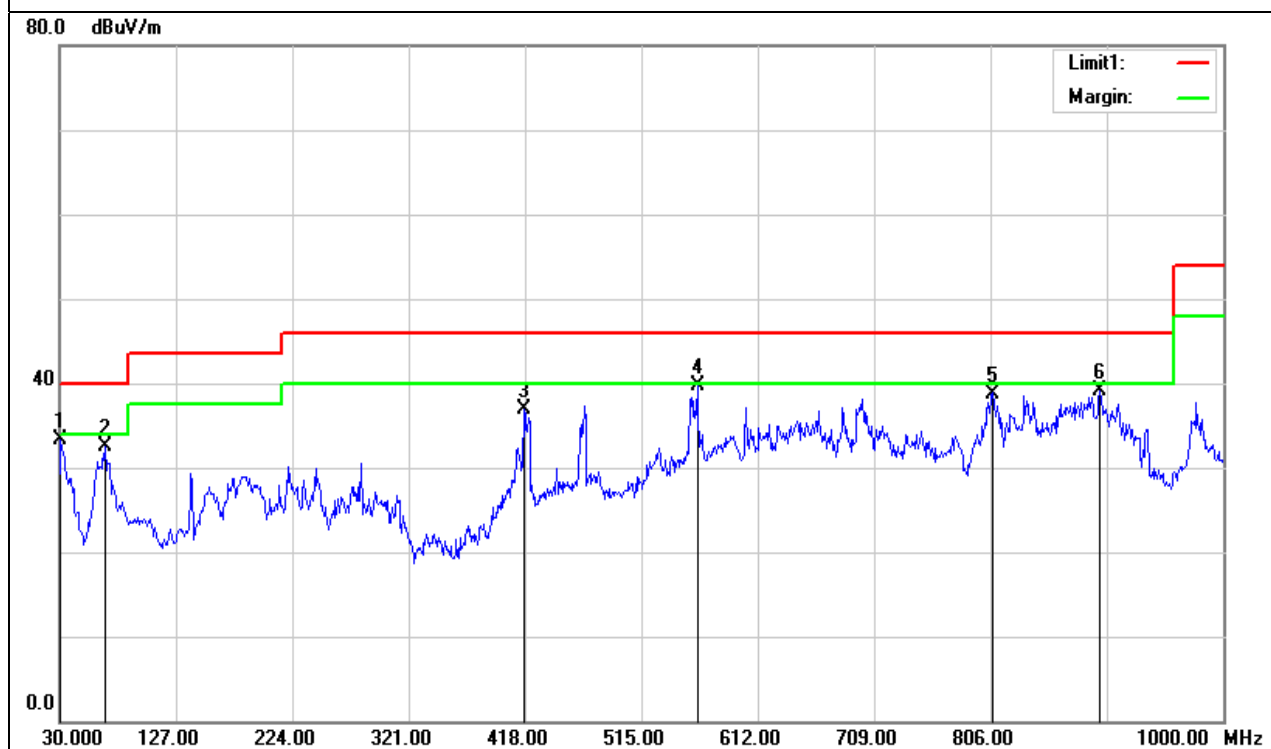


3.2.6 TEST RESULTS (ABOVE 1000 MHZ)

Power board: TV6505-ZC02-01

EUT :	液晶顯示器	Model Name :	LE65K6500U
Temperature :	24 °C	Relative Humidity :	54%
Pressure :	1010 hPa	Test Date :	2018-03-26
Test Mode :	TX CH01 (802.11b :Rate 1Mbps)	Polarization :	Horizontal
Measurement Distance	3 m	Frenqucy Range	1GHz to 25GHz
Test Power :	AC 110/60Hz		

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
1459.000	64.73	-6.95	57.78	74.00	-16.22	peak
1459.000	49.27	-6.95	42.32	54.00	-11.68	AVG
1558.000	60.56	-6.78	53.78	74.00	-20.22	peak
1558.000	48.71	-6.78	41.93	54.00	-12.07	AVG
1891.000	53.60	-5.69	47.91	74.00	-26.09	peak
2764.000	51.25	-1.78	49.47	74.00	-24.53	peak
3034.000	55.09	-1.30	53.79	74.00	-20.21	peak
3034.000	42.38	-1.30	41.08	54.00	-12.92	AVG
5824.000	48.80	6.01	54.81	74.00	-19.19	peak
5824.000	35.21	6.01	41.22	54.00	-12.78	AVG


Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

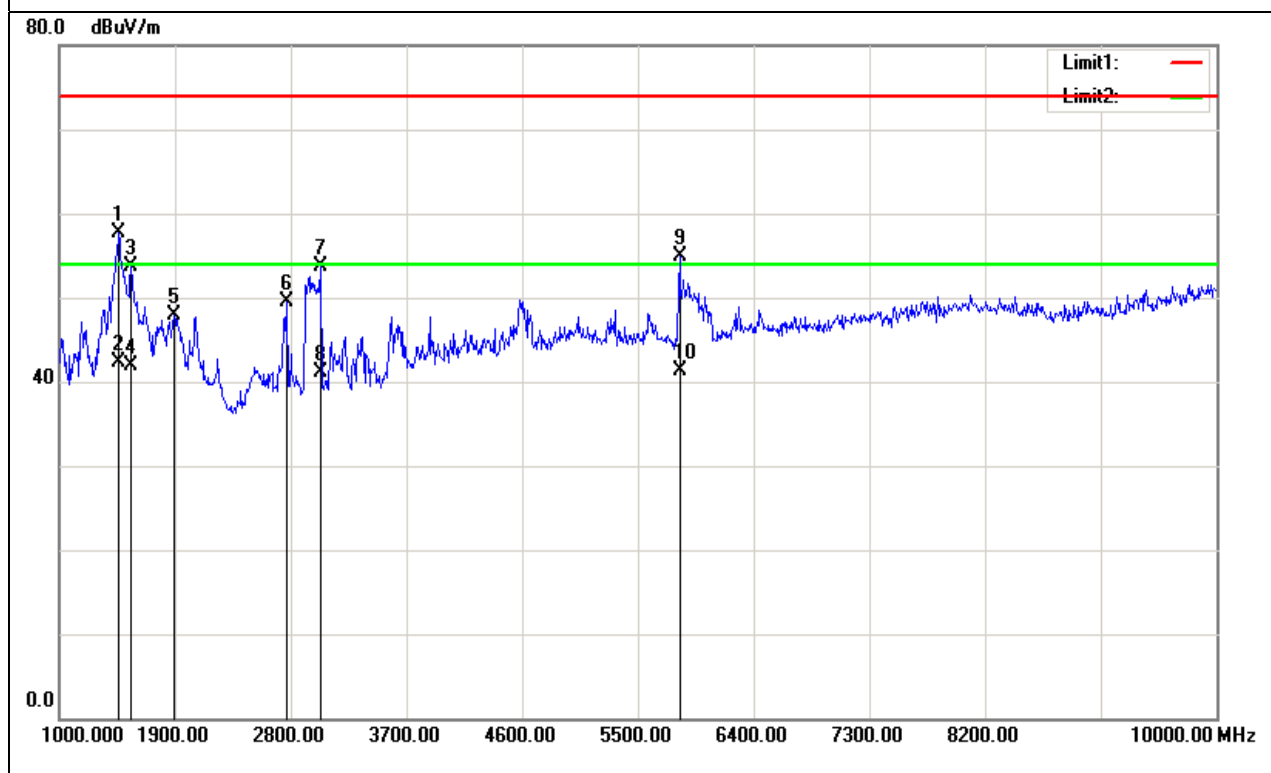

EUT :	液晶顯示器	Model Name :	LE65K6500U
Temperature :	24 °C	Relative Humidity :	54%
Pressure :	1010 hPa	Test Date :	2018-03-26
Test Mode :	TX CH01 (802.11b :Rate 1Mbps)	Polarization :	Vertical
Measurement Distance	3 m	Frenqucy Range	1GHz to 25GHz
Test Power :	AC 110/60Hz		


Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
1387.000	61.72	-7.11	54.61	74.00	-19.39	peak
1387.000	48.50	-7.11	41.39	54.00	-12.61	AVG
1576.000	67.81	-6.74	61.07	74.00	-12.93	peak
1576.000	48.93	-6.74	42.19	54.00	-11.81	AVG
2971.000	55.23	-1.41	53.82	74.00	-20.18	peak
2971.000	42.32	-1.41	40.91	54.00	-13.09	AVG
3664.000	51.67	0.17	51.84	74.00	-22.16	peak
4618.000	51.54	3.73	55.27	74.00	-18.73	peak
4618.000	37.51	3.73	41.24	54.00	-12.76	AVG
5824.000	45.89	6.01	51.90	74.00	-22.10	peak

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

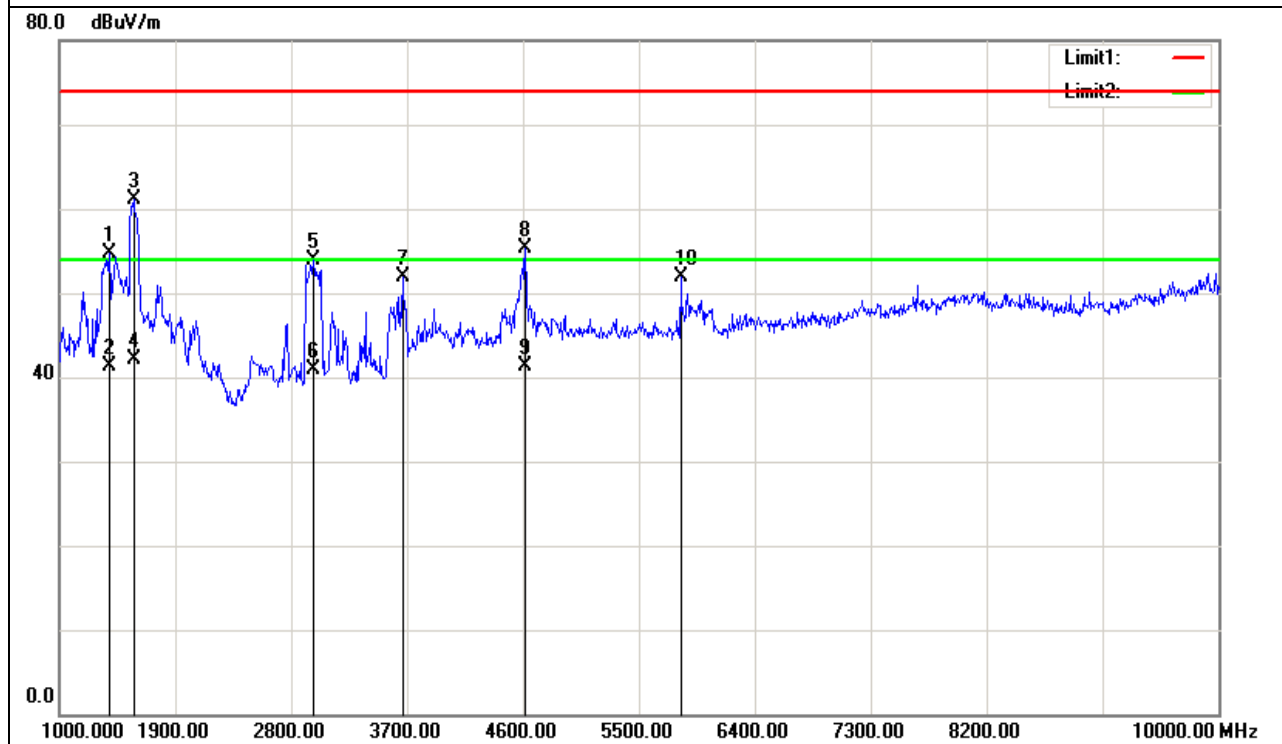


Horizontal

Detect: 10GHz -26.5GHz

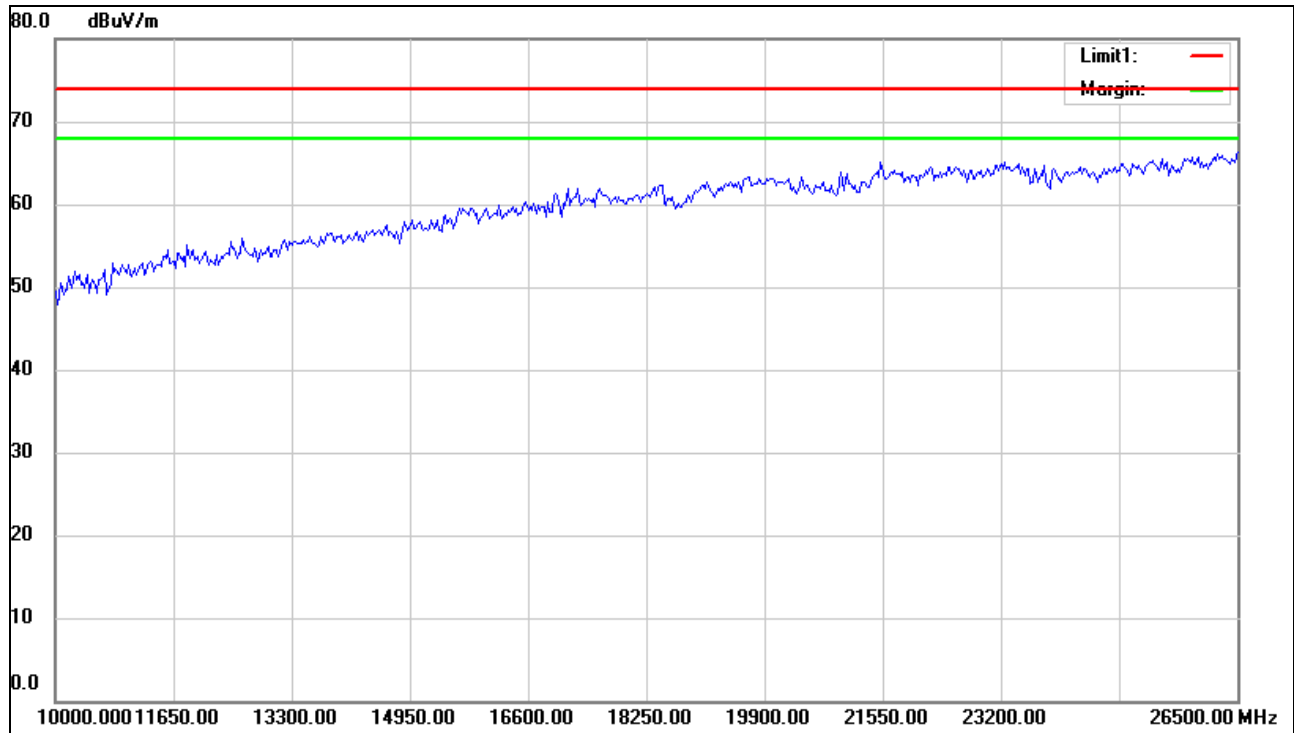

Vertical


Detect: 10GHz -26.5GHz

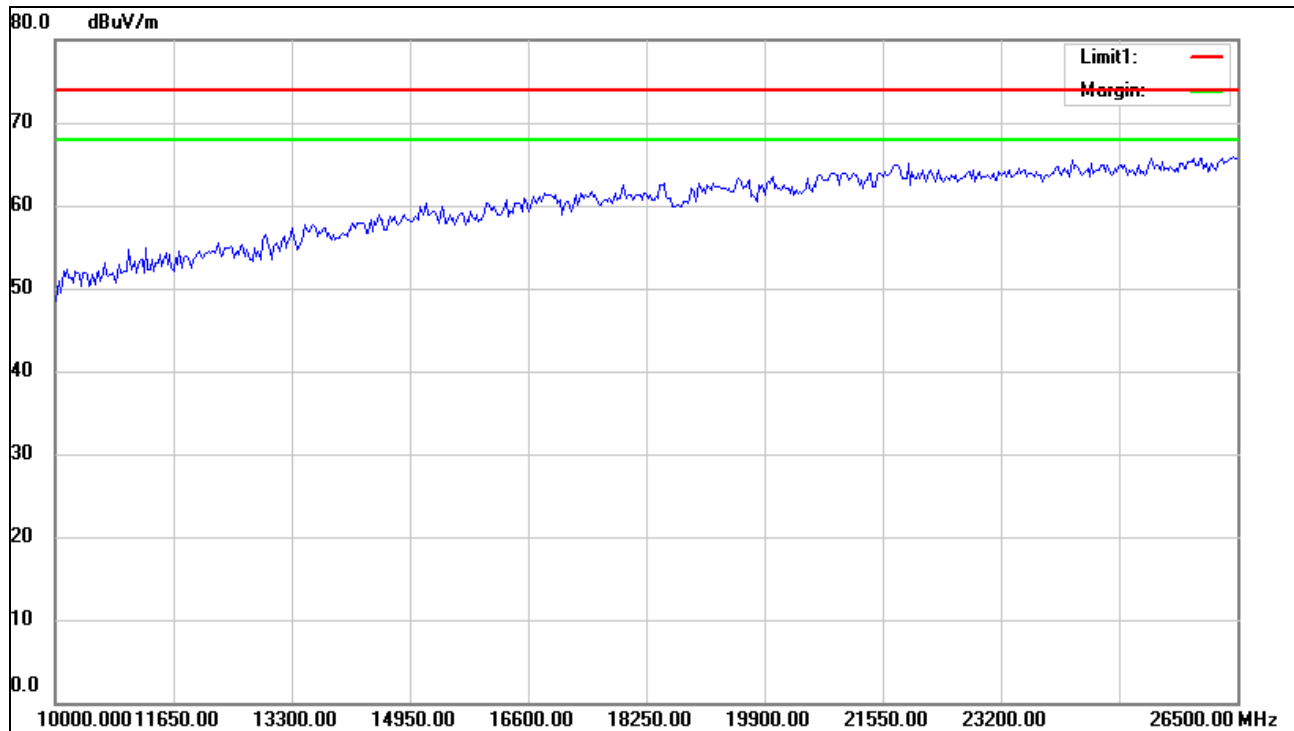

EUT :	液晶顯示器	Model Name :	LE65K6500U
Temperature :	24 °C	Relative Humidity :	54%
Pressure :	1010 hPa	Test Date :	2018-03-26
Test Mode :	TX CH06 (802.11b :Rate 1Mbps)	Polarization :	Horizontal
Measurement Distance	3 m	Frenqucy Range	1GHz to 25GHz
Test Power :	AC 110/60Hz		

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
1468.000	63.72	-6.94	56.78	74.00	-17.22	peak
1468.000	48.16	-6.94	41.22	54.00	-12.78	AVG
1729.000	57.98	-6.42	51.56	74.00	-22.44	peak
2746.000	52.18	-1.82	50.36	74.00	-23.64	peak
3034.000	56.85	-1.30	55.55	74.00	-18.45	peak
3034.000	44.08	-1.30	42.78	54.00	-11.22	AVG
4582.000	47.26	3.62	50.88	74.00	-23.12	peak
5824.000	46.97	6.01	52.98	74.00	-21.02	peak
5824.000	35.58	6.01	41.59	54.00	-12.41	AVG


Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

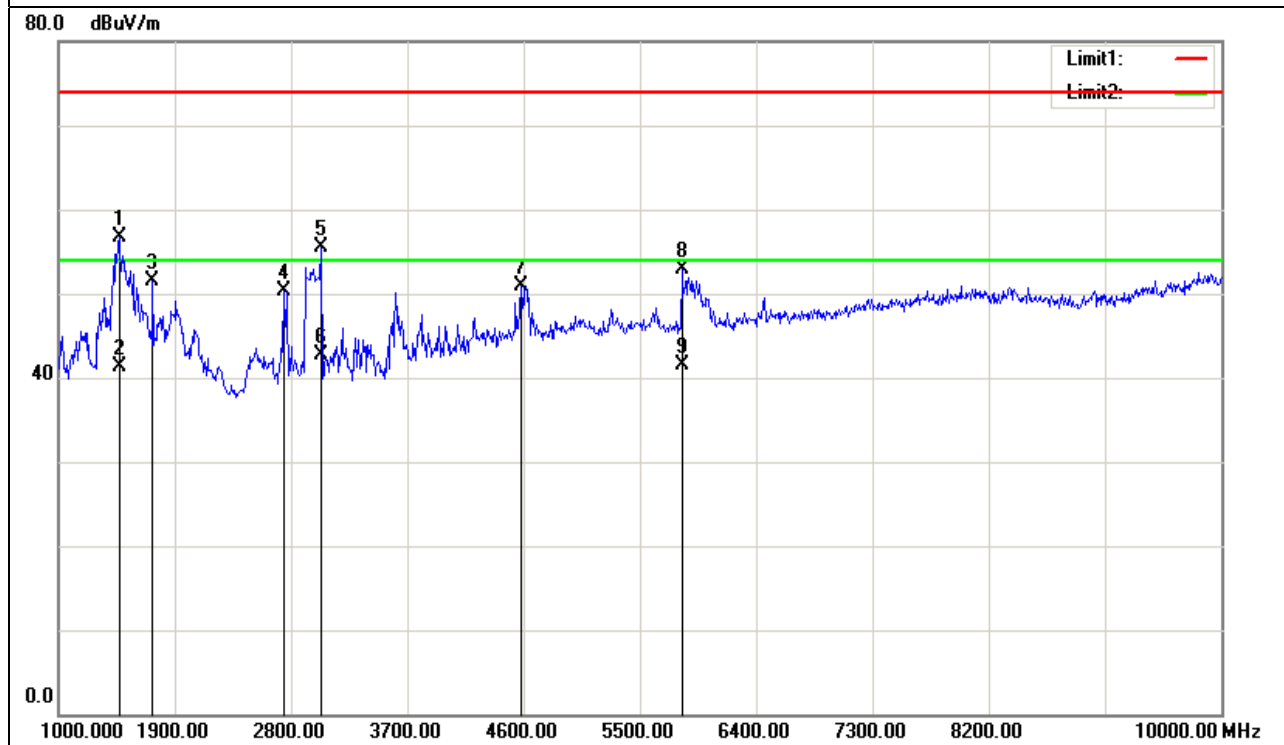

EUT :	液晶顯示器	Model Name :	LE65K6500U
Temperature :	24 °C	Relative Humidity :	54%
Pressure :	1010 hPa	Test Date :	2018-03-26
Test Mode :	TX CH06 (802.11b :Rate 1Mbps)	Polarization :	Vertical
Measurement Distance	3 m	Frenqucy Range	1GHz to 25GHz
Test Power :	AC 110/60Hz		


Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
1333.000	61.82	-7.30	54.52	74.00	-19.48	peak
1333.000	48.95	-7.30	41.65	54.00	-12.35	AVG
1459.000	61.71	-6.95	54.76	74.00	-19.24	peak
1459.000	49.64	-6.95	42.69	54.00	-11.31	AVG
1567.000	68.94	-6.76	62.18	74.00	-11.82	peak
1567.000	49.47	-6.76	42.71	54.00	-11.29	AVG
2908.000	55.59	-1.53	54.06	74.00	-19.94	peak
2908.000	42.66	-1.53	41.13	54.00	-12.87	AVG
4618.000	50.49	3.73	54.22	74.00	-19.78	peak
4618.000	37.83	3.73	41.56	54.00	-12.44	AVG
5824.000	48.35	6.01	54.36	74.00	-19.64	peak

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

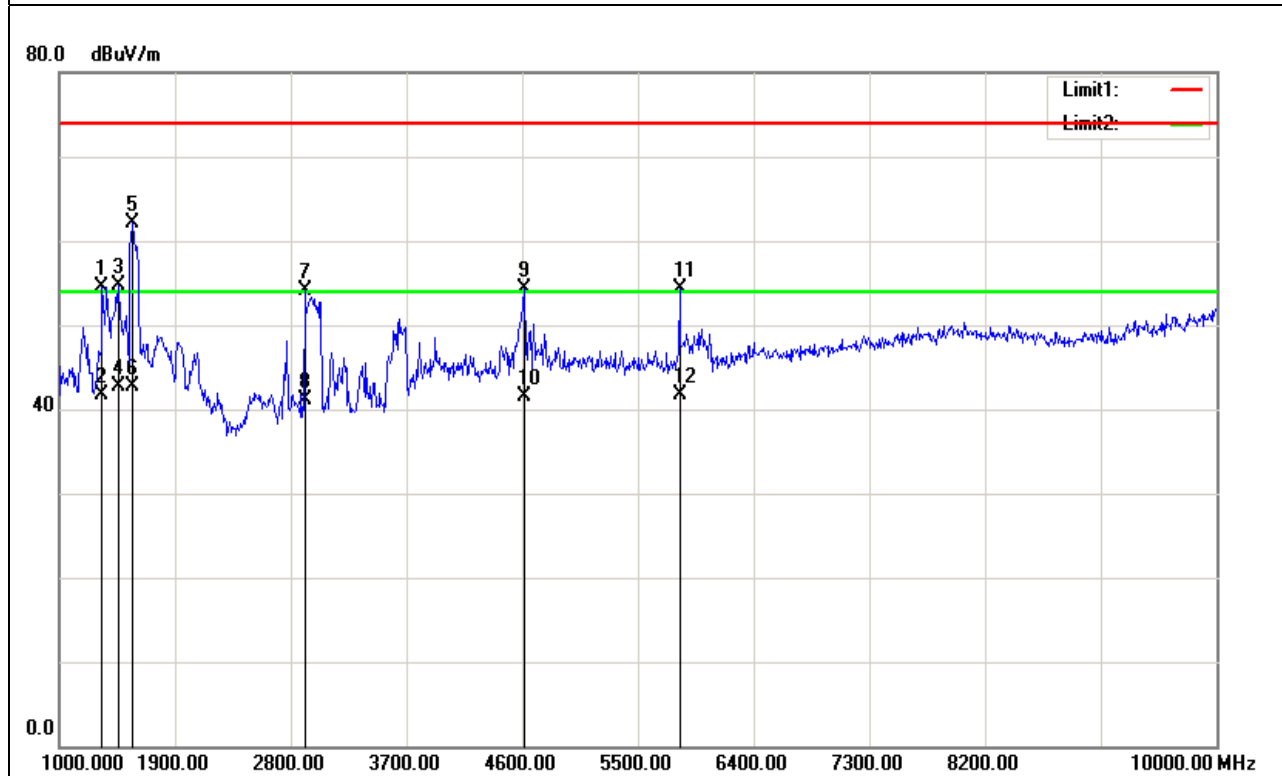


Horizontal

Detect: 10GHz -26.5GHz

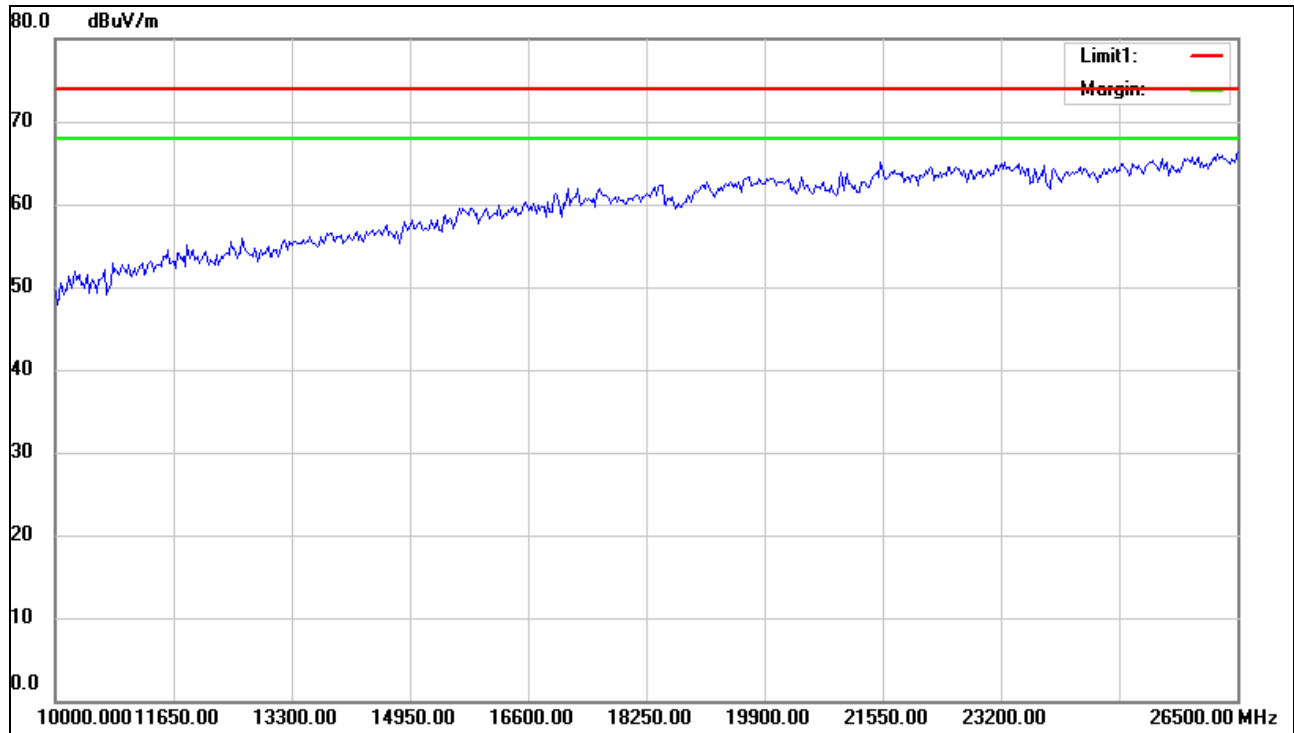

Vertical


Detect: 10GHz -26.5GHz

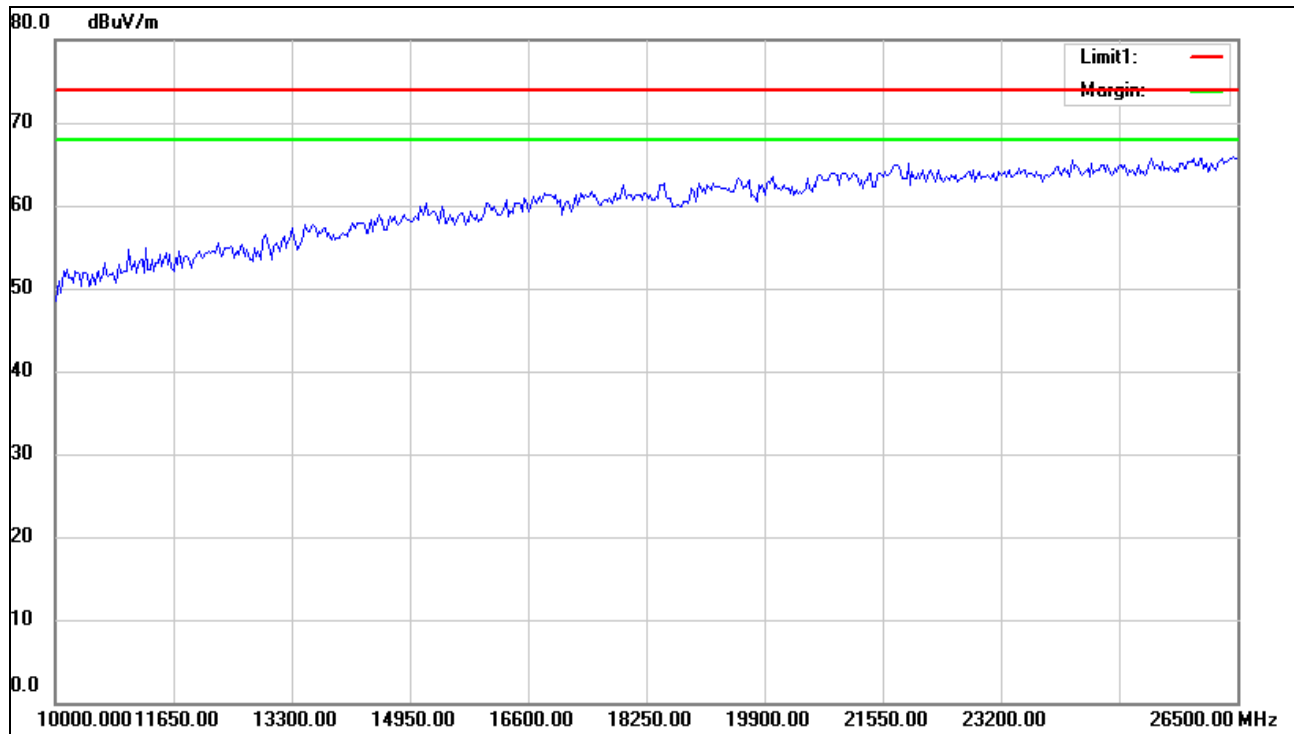

EUT :	液晶顯示器	Model Name :	LE65K6500U
Temperature :	24 °C	Relative Humidity :	54%
Pressure :	1010 hPa	Test Date :	2018-03-26
Test Mode :	TX CH11 (802.11b :Rate 1Mbps)	Polarization :	Horizontal
Measurement Distance	3 m	Frenqucy Range	1GHz to 25GHz
Test Power :	AC 110/60Hz		

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
1477.000	62.83	-6.92	55.91	74.00	-18.09	peak
1477.000	48.27	-6.92	41.35	54.00	-12.65	AVG
1909.000	54.72	-5.58	49.14	74.00	-24.86	peak
2773.000	53.91	-1.77	52.14	74.00	-21.86	peak
2773.000	43.03	-1.77	41.26	54.00	-12.74	AVG
3034.000	55.16	-1.30	53.86	74.00	-20.14	peak
3034.000	43.27	-1.30	41.97	54.00	-12.03	AVG
4618.000	46.92	3.73	50.65	74.00	-23.35	peak
5824.000	47.97	6.01	53.98	74.00	-20.02	peak
5824.000	36.53	6.01	42.54	54.00	-11.46	AVG


Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

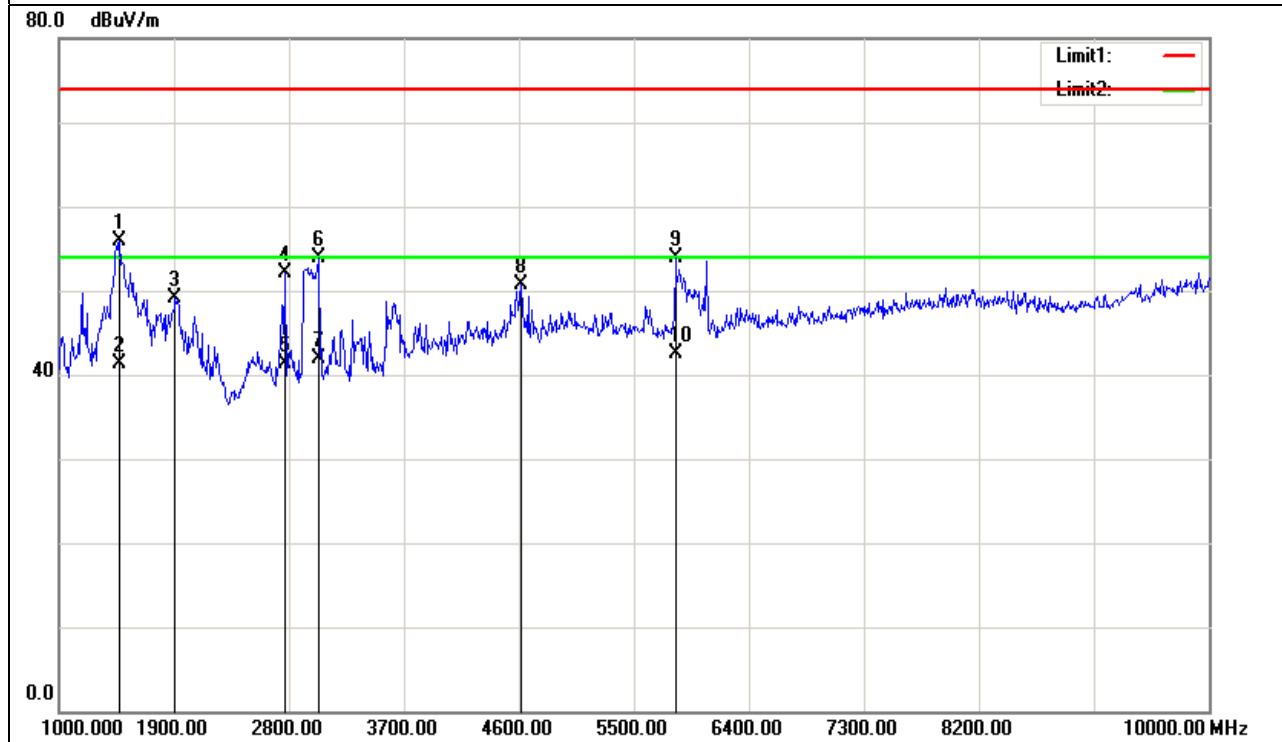

EUT :	液晶顯示器	Model Name :	LE65K6500U
Temperature :	24 °C	Relative Humidity :	54%
Pressure :	1010 hPa	Test Date :	2018-03-26
Test Mode :	TX CH11 (802.11b :Rate 1Mbps)	Polarization :	Vertical
Measurement Distance	3 m	Frenqucy Range	1GHz to 25GHz
Test Power :	AC 110/60Hz		


Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
1351.000	62.50	-7.24	55.26	74.00	-18.74	peak
1351.000	50.01	-7.24	42.77	54.00	-11.23	AVG
1558.000	67.54	-6.78	60.76	74.00	-13.24	peak
1558.000	48.96	-6.78	42.18	54.00	-11.82	AVG
2944.000	55.34	-1.46	53.88	74.00	-20.12	peak
2944.000	42.84	-1.46	41.38	54.00	-12.62	AVG
3682.000	50.33	0.25	50.58	74.00	-23.42	peak
4618.000	49.73	3.73	53.46	74.00	-20.54	peak
4618.000	38.39	3.73	42.12	54.00	-11.88	AVG
5824.000	46.27	6.01	52.28	74.00	-21.72	peak
5824.000	35.55	6.01	41.56	54.00	-12.44	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

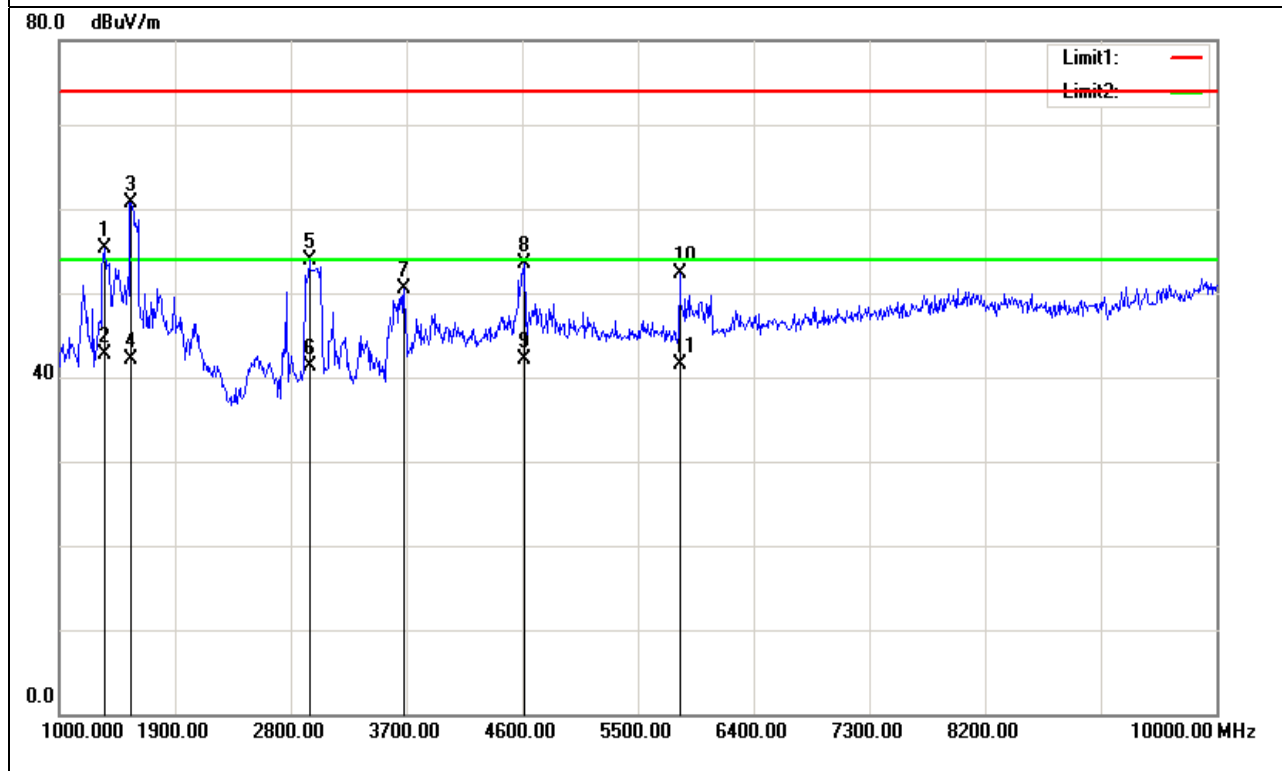


Horizontal

Detect: 10GHz -26.5GHz

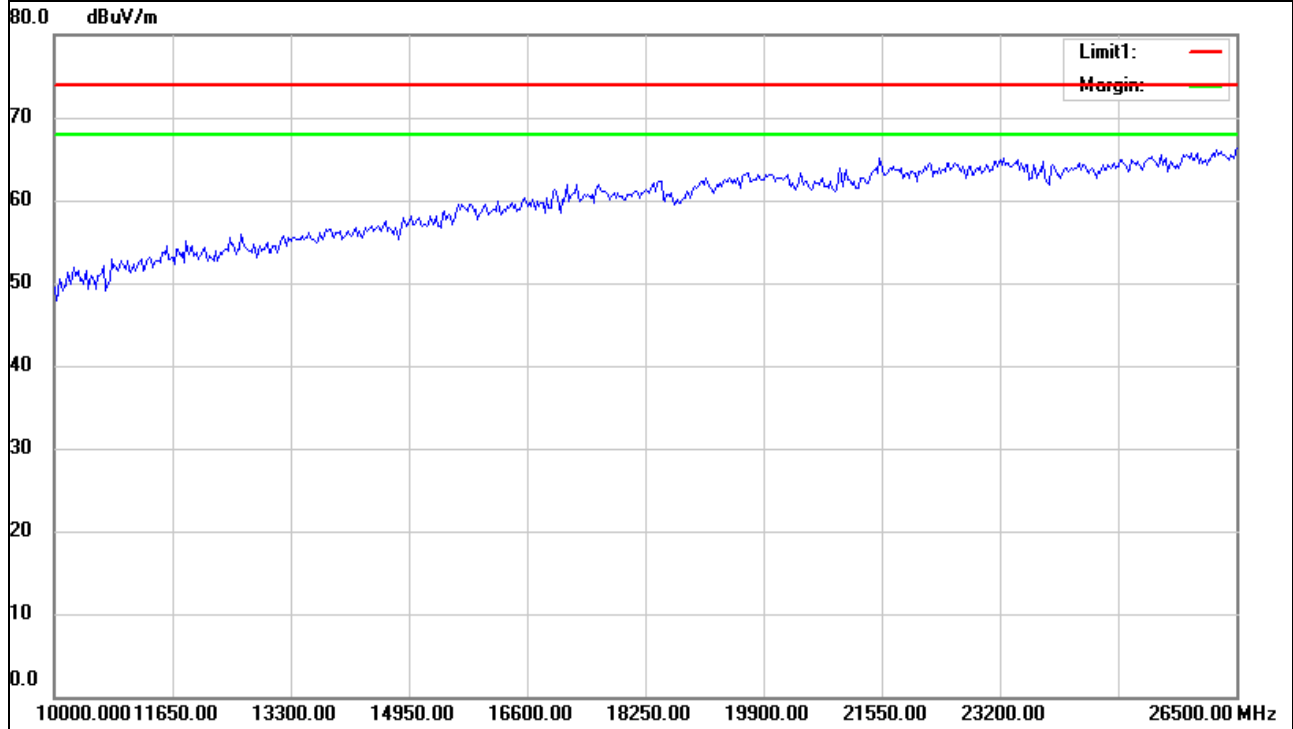

Vertical


Detect: 10GHz -26.5GHz

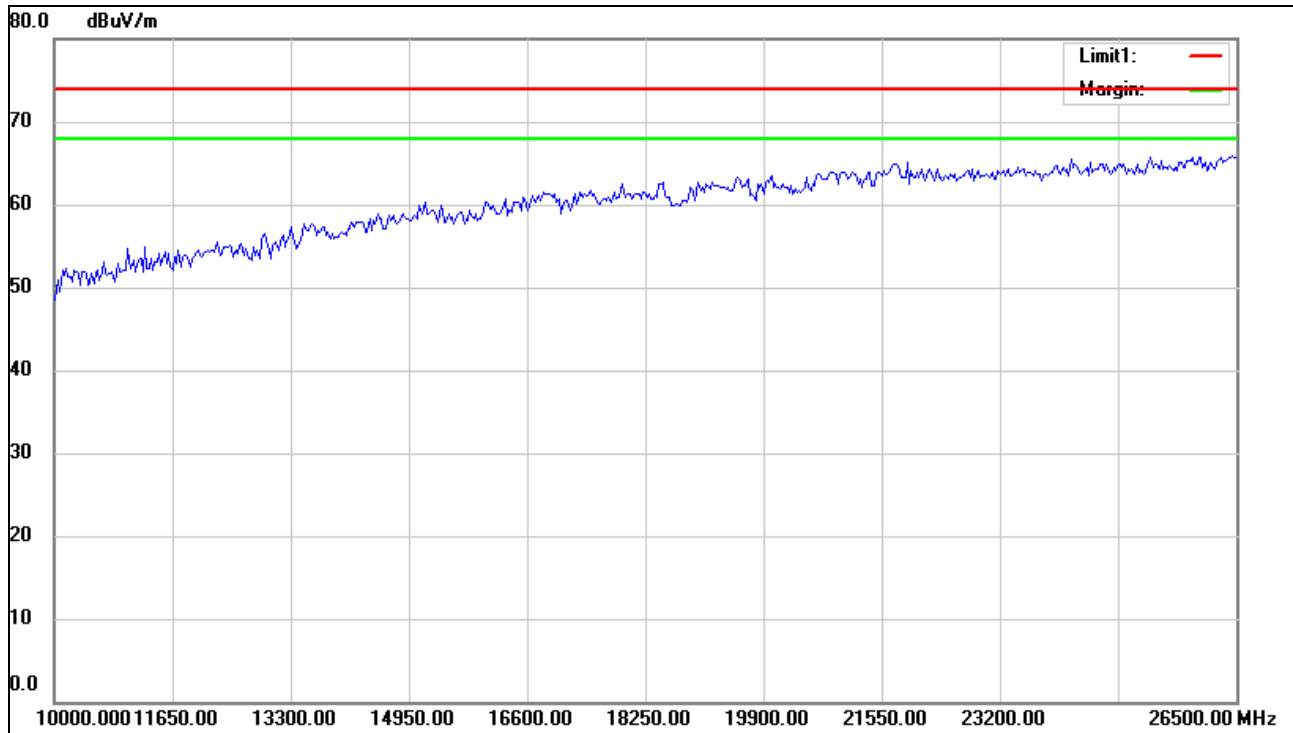

EUT :	液晶顯示器	Model Name :	LE65K6500U
Temperature :	24 °C	Relative Humidity :	54%
Pressure :	1010 hPa	Test Date :	2018-03-26
Test Mode :	TX CH01 (802.11g; Rate 6Mbps)	Polarization :	Horizontal
Measurement Distance	3 m	Frenqucy Range	1GHz to 25GHz
Test Power :	AC 110/60Hz		

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
1459.000	63.43	-6.95	56.48	74.00	-17.52	peak
1459.000	48.49	-6.95	41.54	54.00	-12.46	AVG
1567.000	62.26	-6.76	55.50	74.00	-18.50	peak
1567.000	48.23	-6.76	41.47	54.00	-12.53	AVG
2764.000	52.13	-1.78	50.35	74.00	-23.65	peak
2764.000	44.97	-1.78	43.19	54.00	-10.81	AVG
3034.000	55.06	-1.30	53.76	74.00	-20.24	peak
3034.000	41.92	-1.30	40.62	54.00	-13.38	AVG
4618.000	48.87	3.73	52.60	74.00	-21.40	peak
4618.000	36.62	3.73	40.35	54.00	-13.65	AVG
5824.000	49.09	6.01	55.10	74.00	-18.90	peak


Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

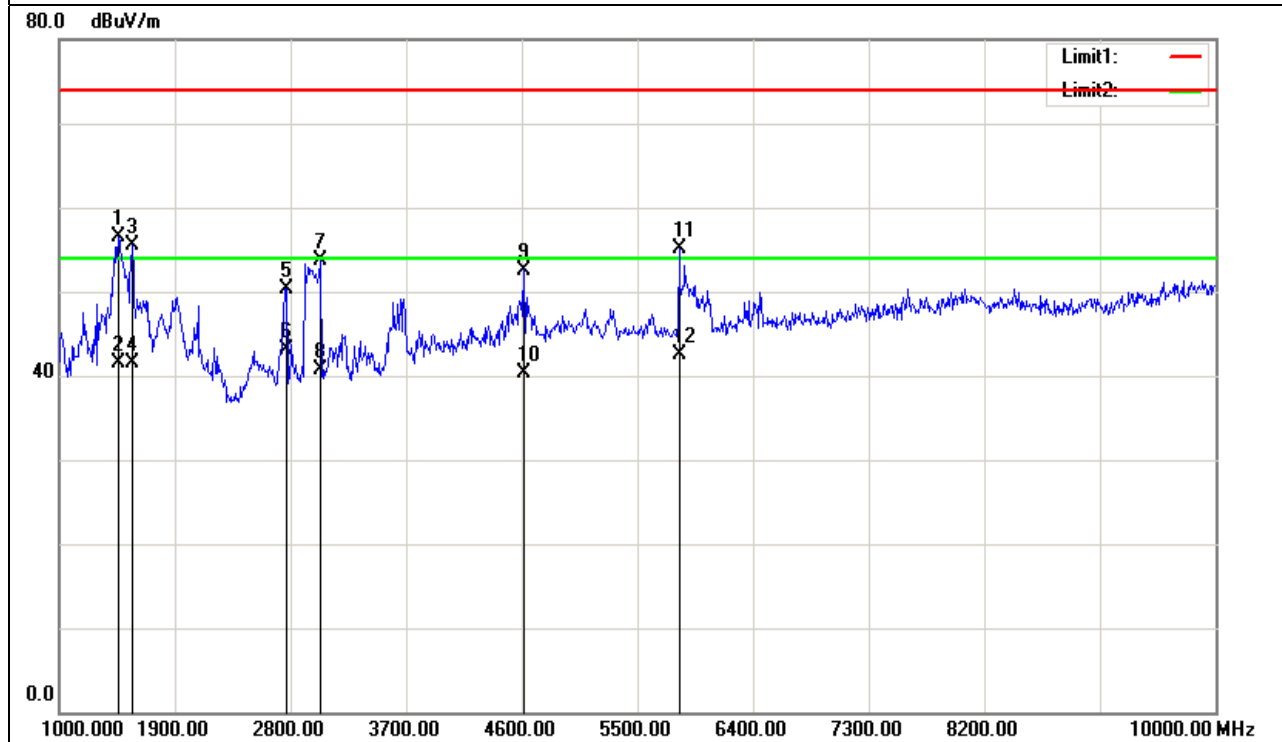

EUT :	液晶顯示器	Model Name :	LE65K6500U
Temperature :	24 °C	Relative Humidity :	54%
Pressure :	1010 hPa	Test Date :	2018-03-26
Test Mode :	TX CH01 (802.11g; Rate 6Mbps)	Polarization :	Vertical
Measurement Distance	3 m	Frenqucy Range	1GHz to 25GHz
Test Power :	AC 110/60Hz		


Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
1387.000	62.13	-7.11	55.02	74.00	-18.98	peak
1387.000	49.49	-7.11	42.38	54.00	-11.62	AVG
1558.000	69.15	-6.78	62.37	74.00	-11.63	peak
1558.000	48.19	-6.78	41.41	54.00	-12.59	AVG
1765.000	63.61	-6.35	57.26	74.00	-16.74	peak
1765.000	47.48	-6.35	41.13	54.00	-12.87	AVG
2944.000	55.56	-1.46	54.10	74.00	-19.90	peak
2944.000	43.76	-1.46	42.30	54.00	-11.70	AVG
3673.000	51.38	0.21	51.59	74.00	-22.41	peak
4618.000	51.20	3.73	54.93	74.00	-19.07	peak
4618.000	36.61	3.73	40.34	54.00	-13.66	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

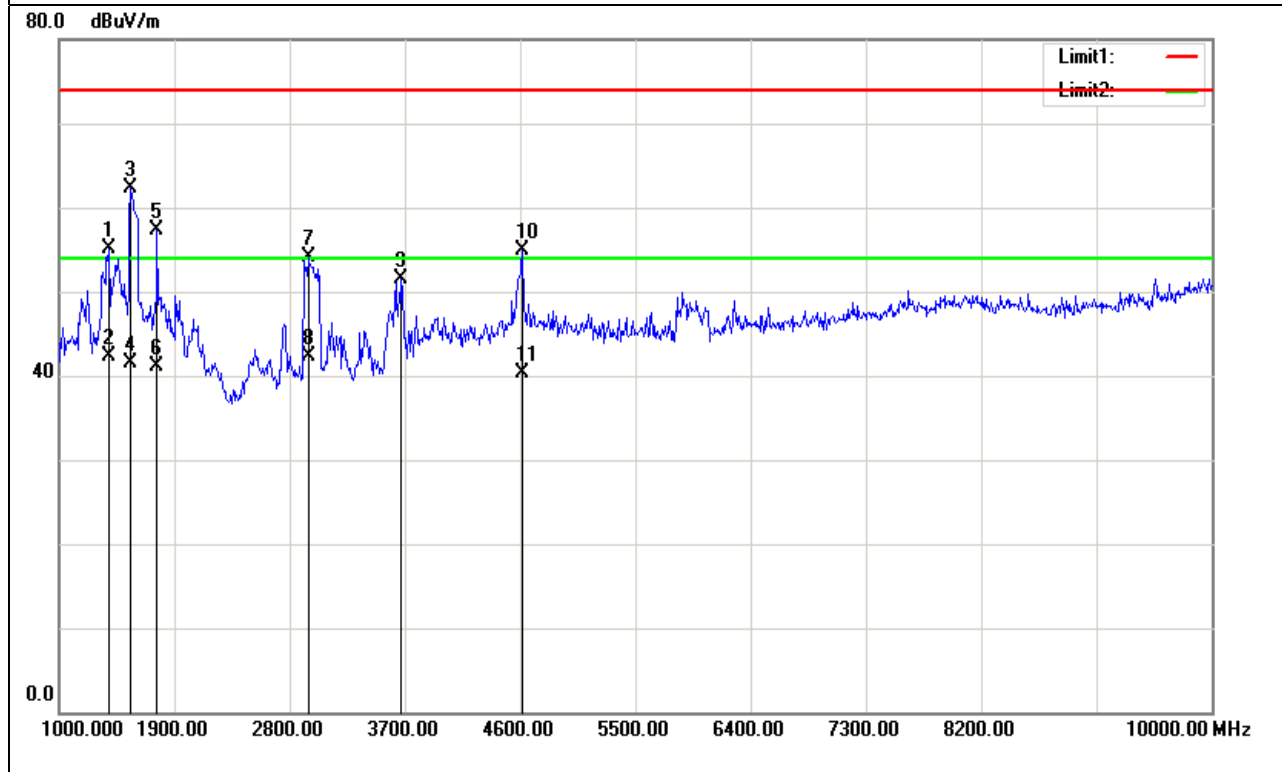


Horizontal

Detect: 10GHz -26.5GHz

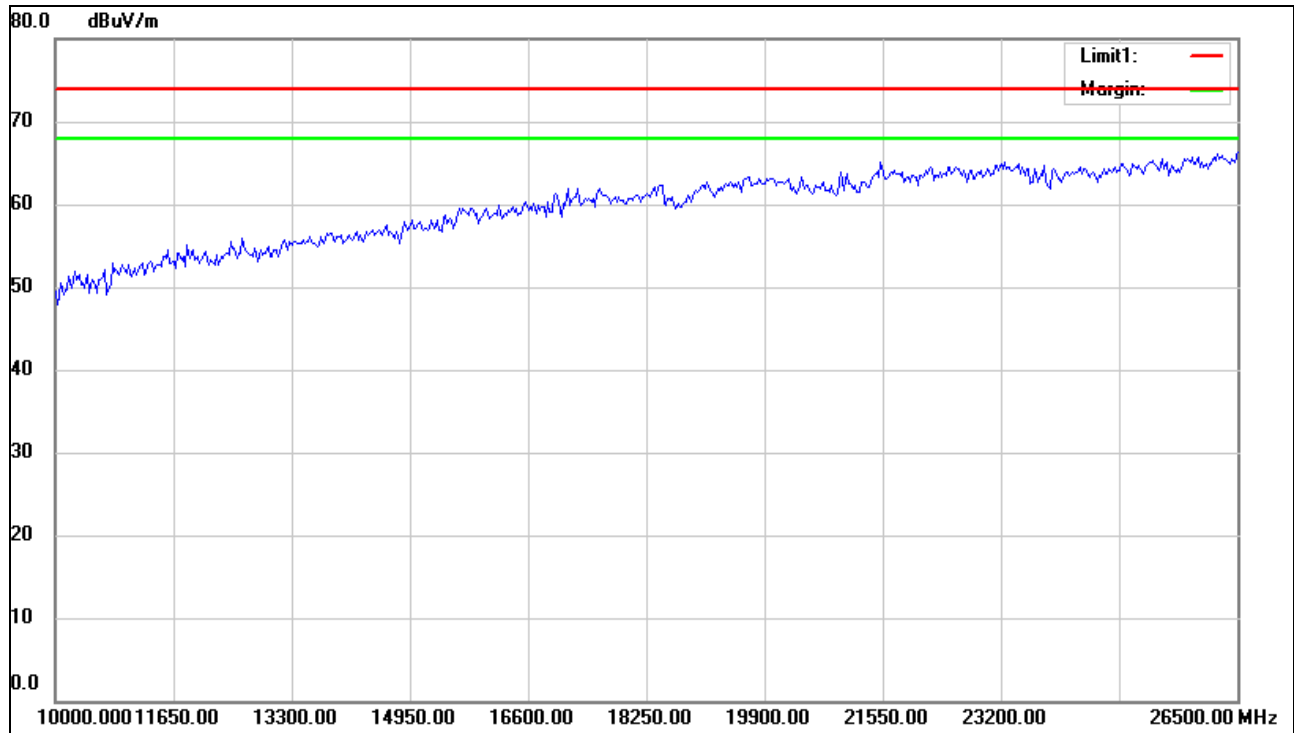

Vertical


Detect: 10GHz -26.5GHz

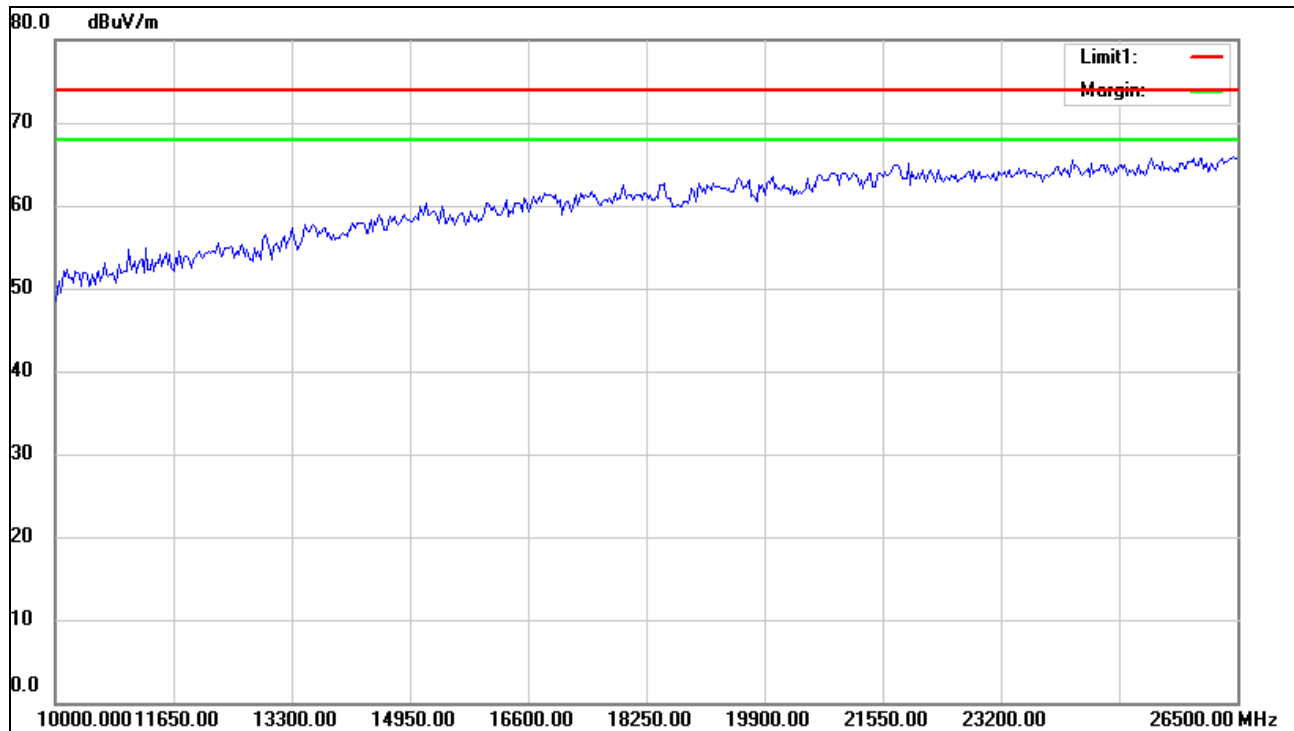

EUT :	液晶顯示器	Model Name :	LE65K6500U
Temperature :	24 °C	Relative Humidity :	54%
Pressure :	1010 hPa	Test Date :	2018-03-26
Test Mode :	TX CH06 (802.11g; Rate 6Mbps)	Polarization :	Horizontal
Measurement Distance	3 m	Frenqucy Range	1GHz to 25GHz
Test Power :	AC 110/60Hz		

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
1459.000	63.69	-6.95	56.74	74.00	-17.26	peak
1459.000	48.29	-6.95	41.34	54.00	-12.66	AVG
2764.000	53.05	-1.78	51.27	74.00	-22.73	peak
2971.000	54.99	-1.41	53.58	74.00	-20.42	peak
2971.000	43.06	-1.41	41.65	54.00	-12.35	AVG
3628.000	50.69	0.02	50.71	74.00	-23.29	peak
4663.000	46.98	3.88	50.86	74.00	-23.14	peak
5824.000	48.48	6.01	54.49	74.00	-19.51	peak
5824.000	35.71	6.01	41.72	54.00	-12.28	AVG


Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

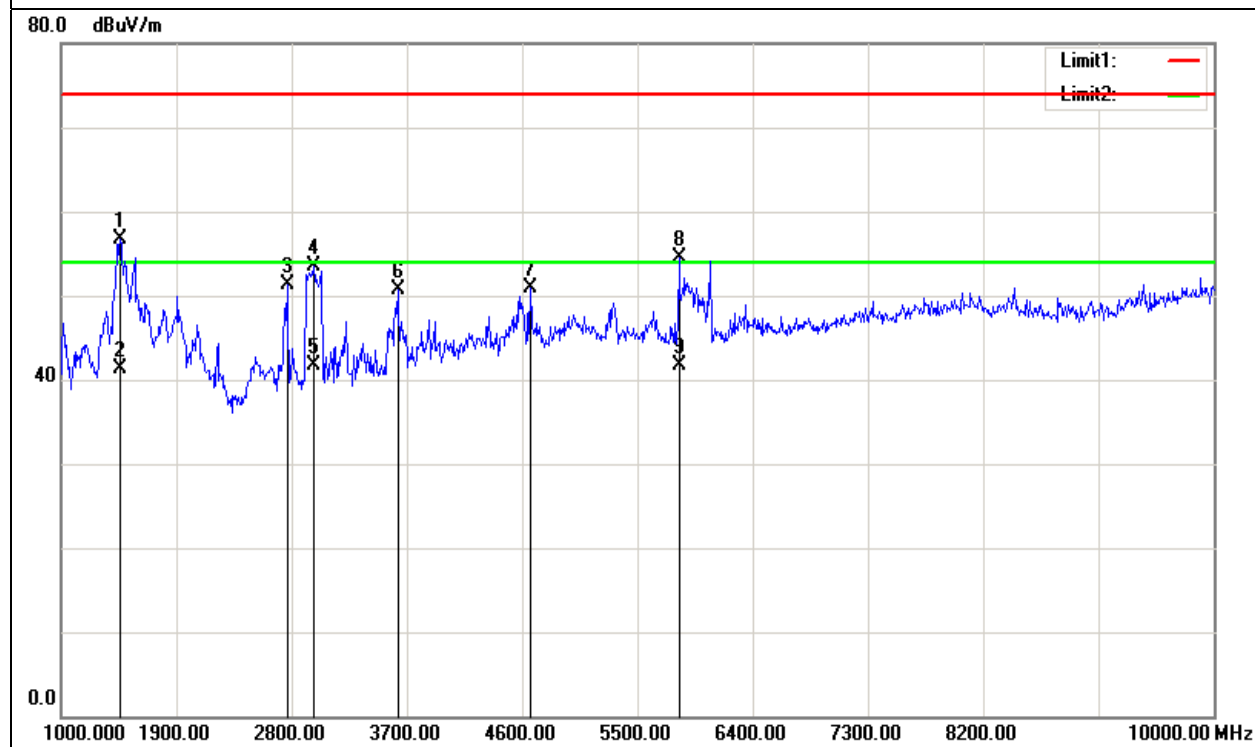

EUT :	液晶顯示器	Model Name :	LE65K6000U
Temperature :	24 °C	Relative Humidity :	54%
Pressure :	1010 hPa	Test Date :	2018-03-26
Test Mode :	TX CH06 (802.11g: Rate 6Mbps)	Polarization :	Vertical
Measurement Distance	3 m	Frenqucy Range	1GHz to 25GHz
Test Power :	AC 110/60Hz		


Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
1387.000	61.57	-7.11	54.46	74.00	-19.54	peak
1387.000	48.37	-7.11	41.26	54.00	-12.74	AVG
1576.000	67.53	-6.74	60.79	74.00	-13.21	peak
1576.000	47.98	-6.74	41.24	54.00	-12.76	AVG
1765.000	59.90	-6.35	53.55	74.00	-20.45	peak
1765.000	47.91	-6.35	41.56	54.00	-12.44	AVG
3034.000	55.55	-1.30	54.25	74.00	-19.75	peak
3034.000	43.67	-1.30	42.37	54.00	-11.63	AVG
3664.000	51.15	0.17	51.32	74.00	-22.68	peak
4618.000	49.61	3.73	53.34	74.00	-20.66	peak
4618.000	37.96	3.73	41.69	54.00	-12.31	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

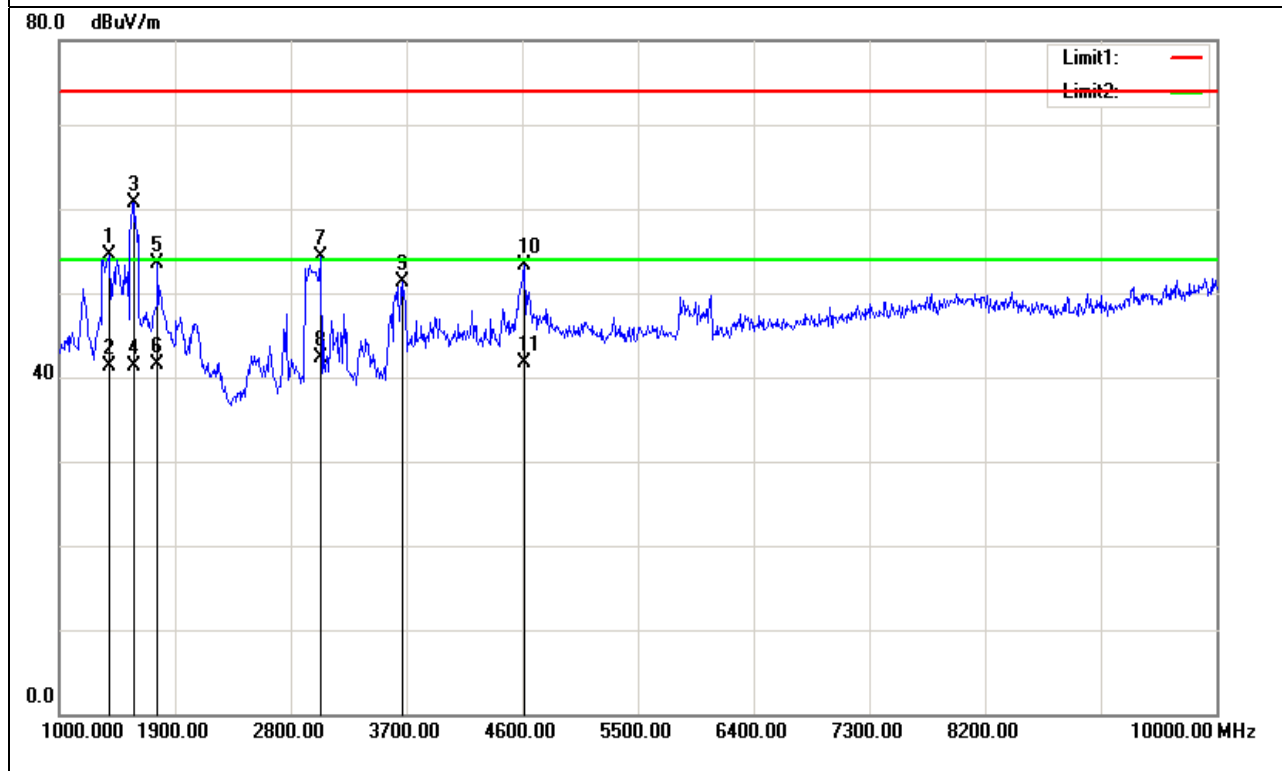


Horizontal

Detect: 10GHz -26.5GHz

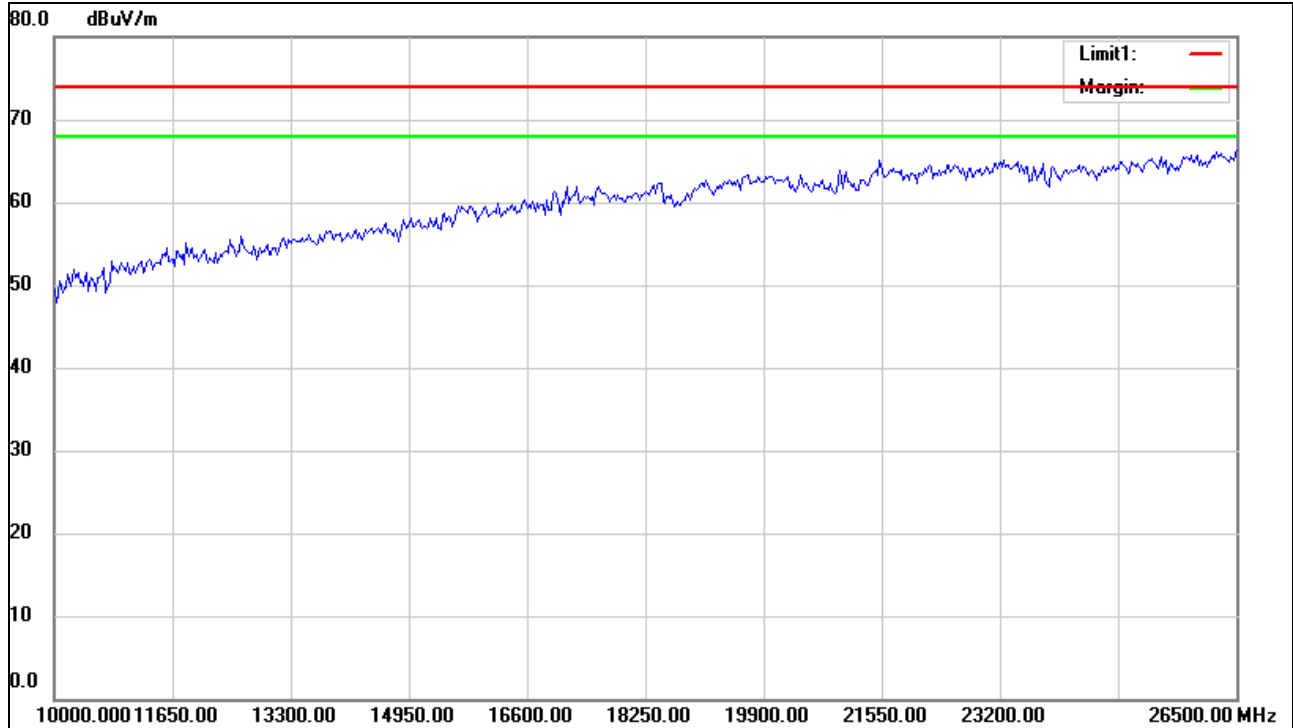

Vertical


Detect: 10GHz -26.5GHz

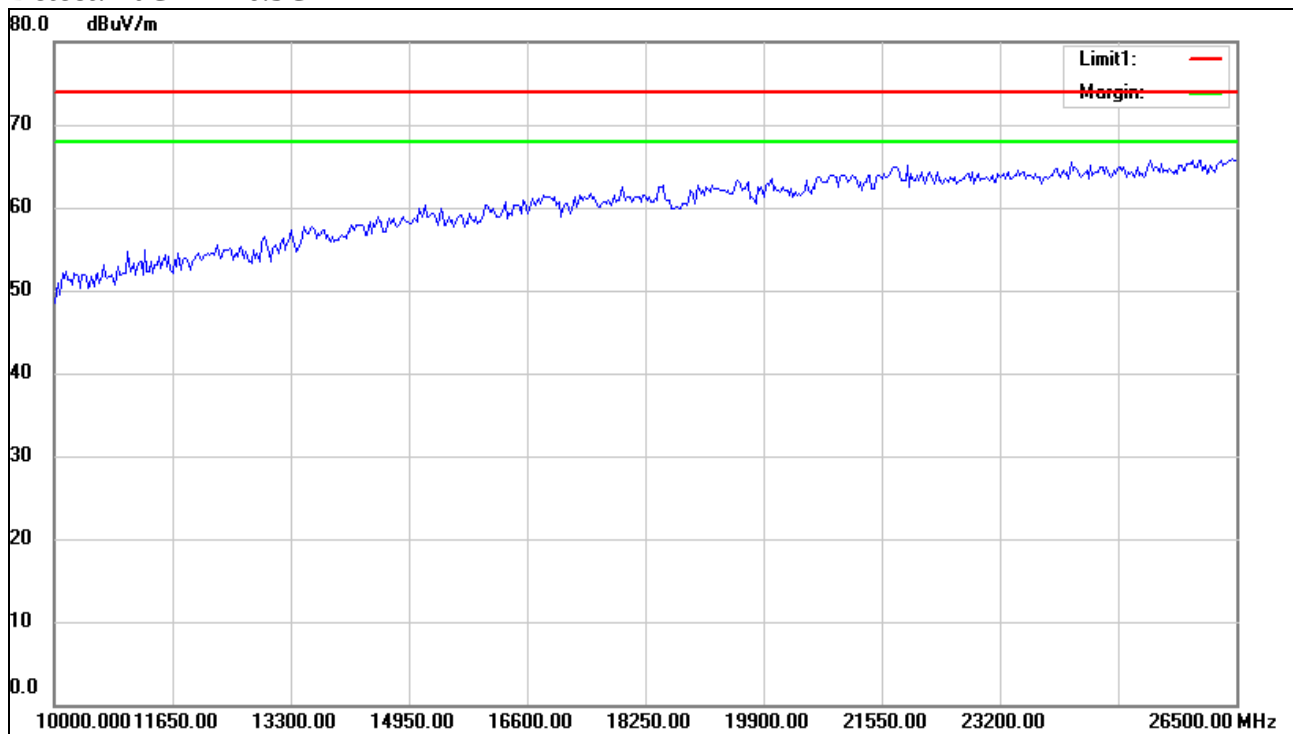

EUT :	液晶顯示器	Model Name :	LE65K6500U
Temperature :	24 °C	Relative Humidity :	54%
Pressure :	1010 hPa	Test Date :	2018-03-26
Test Mode :	TX CH11 (802.11g; Rate 6Mbps)	Polarization :	Horizontal
Measurement Distance	3 m	Frenqucy Range	1GHz to 25GHz
Test Power :	AC 110/60Hz		

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
1468.000	64.10	-6.94	57.16	74.00	-16.84	peak
1468.000	48.31	-6.94	41.37	54.00	-12.63	AVG
2764.000	52.43	-1.78	50.65	74.00	-23.35	peak
3034.000	56.05	-1.30	54.75	74.00	-19.25	peak
3034.000	42.86	-1.30	41.56	54.00	-12.44	AVG
3637.000	49.23	0.06	49.29	74.00	-24.71	peak
4618.000	46.65	3.73	50.38	74.00	-23.62	peak
5824.000	46.83	6.01	52.84	74.00	-21.16	peak
5824.000	35.62	6.01	41.63	54.00	-12.37	AVG


Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.


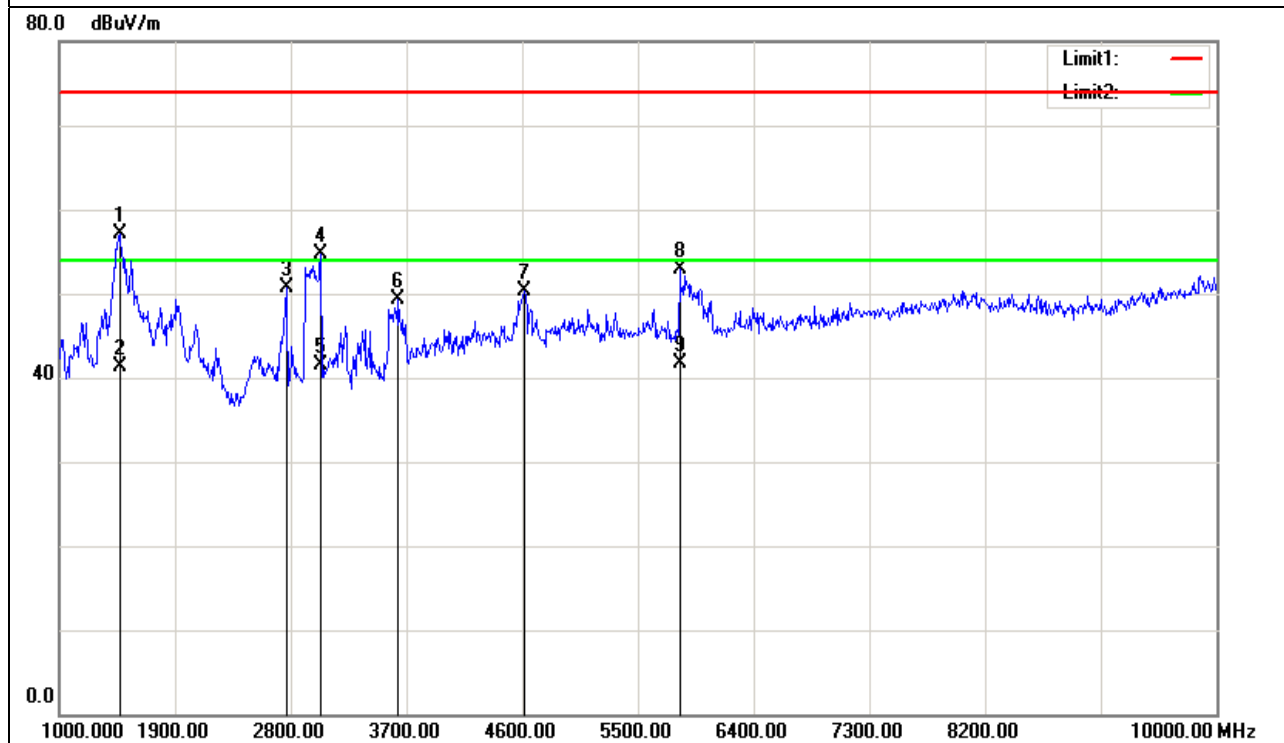


EUT :	液晶顯示器	Model Name :	LE65K6500U
Temperature :	24 °C	Relative Humidity :	54%
Pressure :	1010 hPa	Test Date :	2018-03-26
Test Mode :	TX CH11 (802.11g: Rate 6Mbps)	Polarization :	Vertical
Measurement Distance	3 m	Frenqucy Range	1GHz to 25GHz
Test Power :	AC 110/60Hz		

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
1351.000	63.15	-7.24	55.91	74.00	-18.09	peak
1351.000	48.80	-7.24	41.56	54.00	-12.44	AVG
1549.000	67.34	-6.79	60.55	74.00	-13.45	peak
1549.000	49.10	-6.79	42.31	54.00	-11.69	AVG
2944.000	55.13	-1.46	53.67	74.00	-20.33	peak
2944.000	43.33	-1.46	41.87	54.00	-12.13	AVG
3682.000	52.27	0.25	52.52	74.00	-21.48	peak
3682.000	40.44	0.25	40.69	54.00	-13.31	AVG
4609.000	49.05	3.71	52.76	74.00	-21.24	peak
4609.000	36.66	3.71	40.37	54.00	-13.63	AVG
5824.000	44.24	6.01	50.25	74.00	-23.75	peak

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

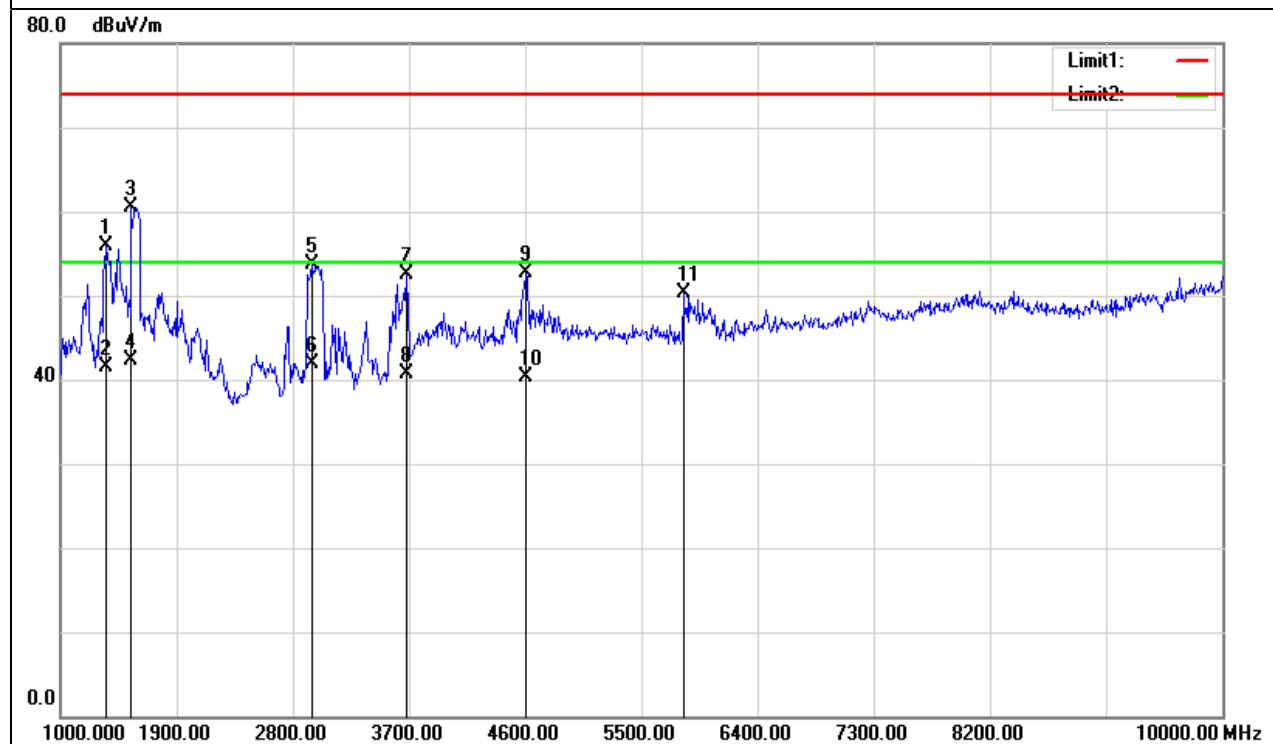


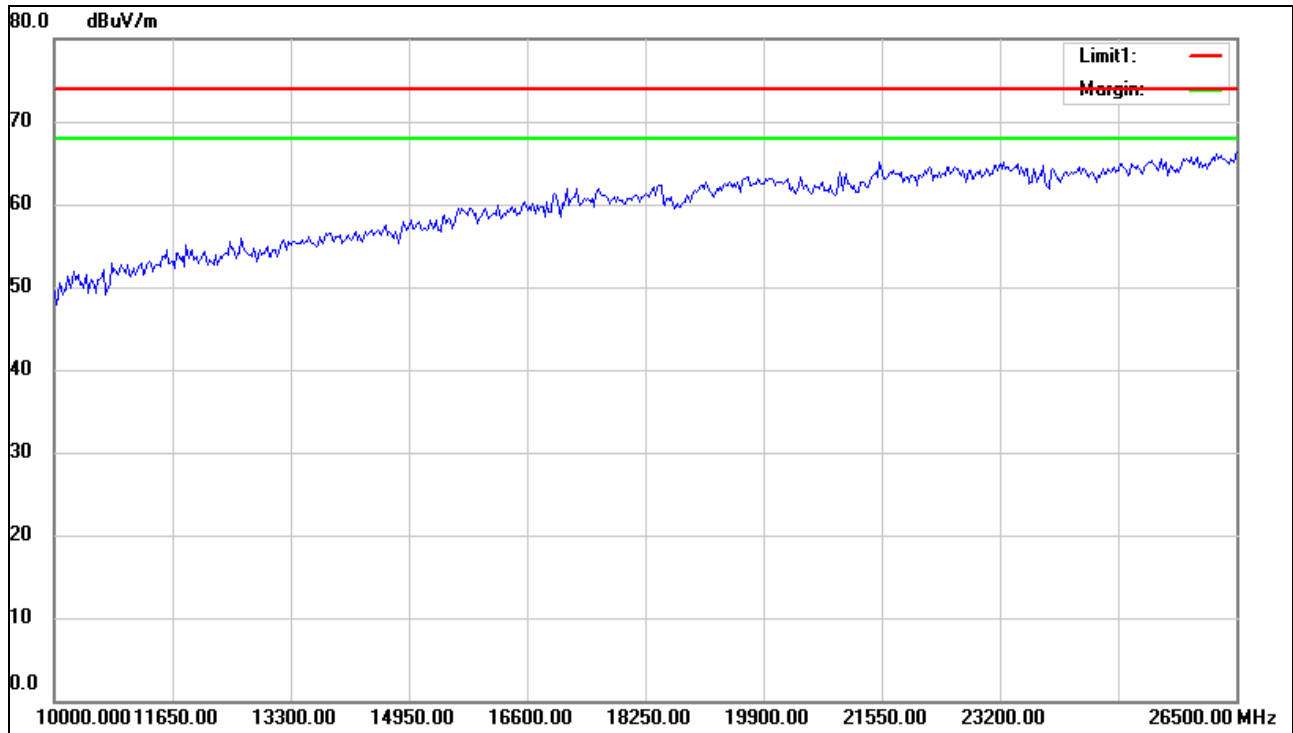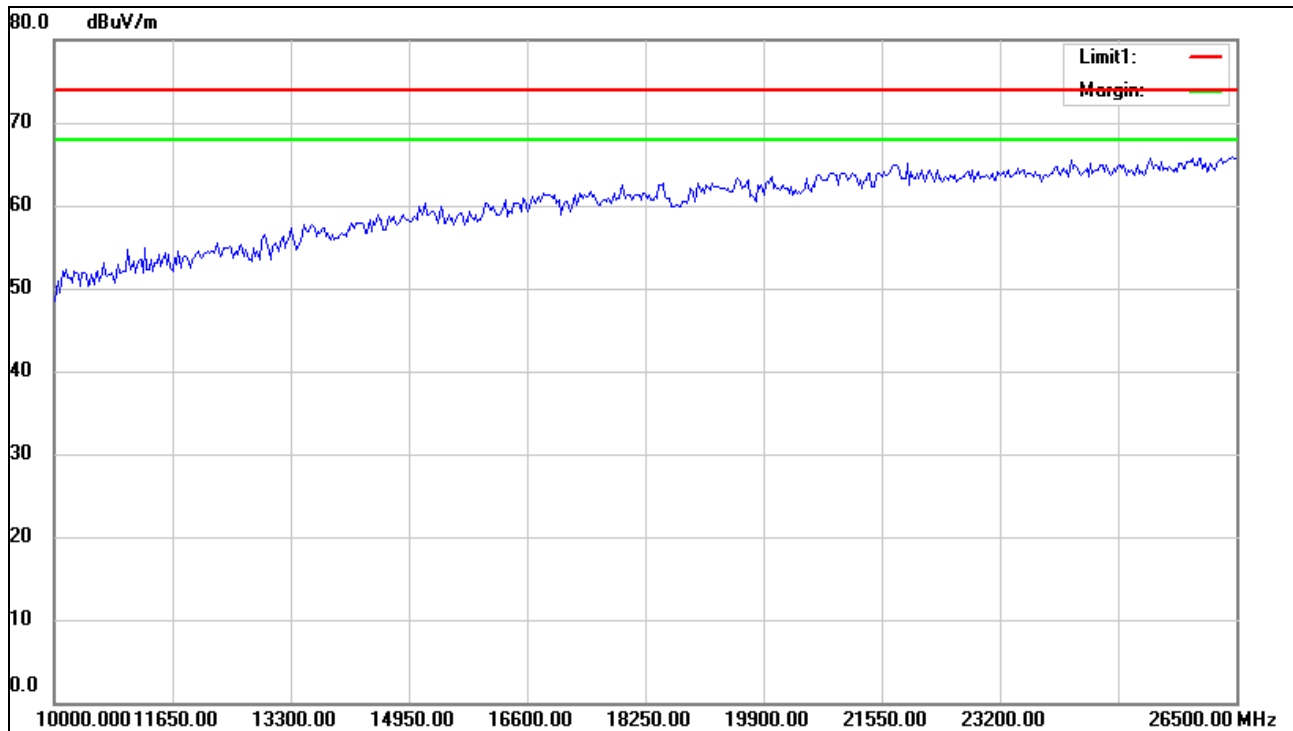Horizontal**Detect: 10GHz -26.5GHz**Vertical**Detect: 10GHz -26.5GHz**

EUT :	液晶顯示器	Model Name :	LE65K6000U
Temperature :	24 °C	Relative Humidity :	54%
Pressure :	1010 hPa	Test Date :	2018-03-26
Test Mode :	TX CH01 (802.11n20 : Rate 6.5Mbps)	Polarization :	Horizontal
Measurement Distance	3 m	Frenqucy Range	1GHz to 25GHz
Test Power :	AC 110/60Hz		

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
1459.000	64.80	-6.95	57.85	74.00	-16.15	peak
1459.000	49.52	-6.95	42.57	54.00	-11.43	AVG
1774.000	60.55	-6.33	54.22	74.00	-19.78	peak
1774.000	47.89	-6.33	41.56	54.00	-12.44	AVG
2764.000	54.37	-1.78	52.59	74.00	-21.41	peak
2764.000	43.17	-1.78	41.39	54.00	-12.61	peak
3034.000	56.48	-1.30	55.18	74.00	-18.82	peak
3034.000	42.66	-1.30	41.36	54.00	-12.64	peak
4618.000	46.81	3.73	50.54	74.00	-23.46	peak
5815.000	47.37	6.00	53.37	74.00	-20.63	peak
5815.000	36.49	6.00	42.49	54.00	-11.51	AVG


Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.


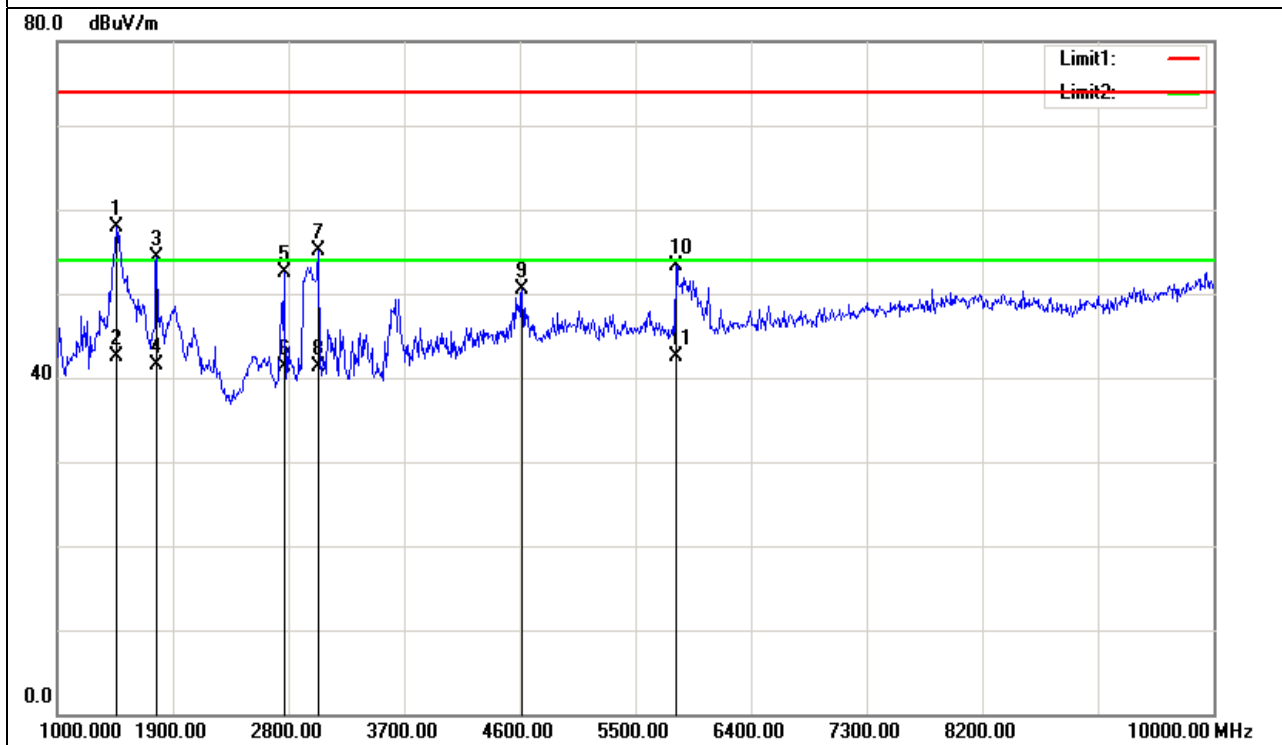


EUT :	液晶顯示器	Model Name :	LE65K6500U
Temperature :	24 °C	Relative Humidity :	54%
Pressure :	1010 hPa	Test Date :	2018-03-26
Test Mode :	TX CH01 (802.11n20 : Rate 6.5Mbps)	Polarization :	Vertical
Measurement Distance	3 m	Frenquency Range	1GHz to 25GHz
Test Power :	AC 110/60Hz		

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
1387.000	61.06	-7.11	53.95	74.00	-20.05	peak
1387.000	48.72	-7.11	41.61	54.00	-12.39	AVG
1567.000	68.42	-6.76	61.66	74.00	-12.34	peak
1567.000	49.23	-6.76	42.47	54.00	-11.53	AVG
2980.000	55.18	-1.40	53.78	74.00	-20.22	peak
2980.000	43.03	-1.40	41.63	54.00	-12.37	AVG
3664.000	51.54	0.17	51.71	74.00	-22.29	peak
4609.000	50.32	3.71	54.03	74.00	-19.97	peak
4609.000	37.43	3.71	41.14	54.00	-12.86	AVG
5851.000	43.94	6.02	49.96	74.00	-24.04	peak

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

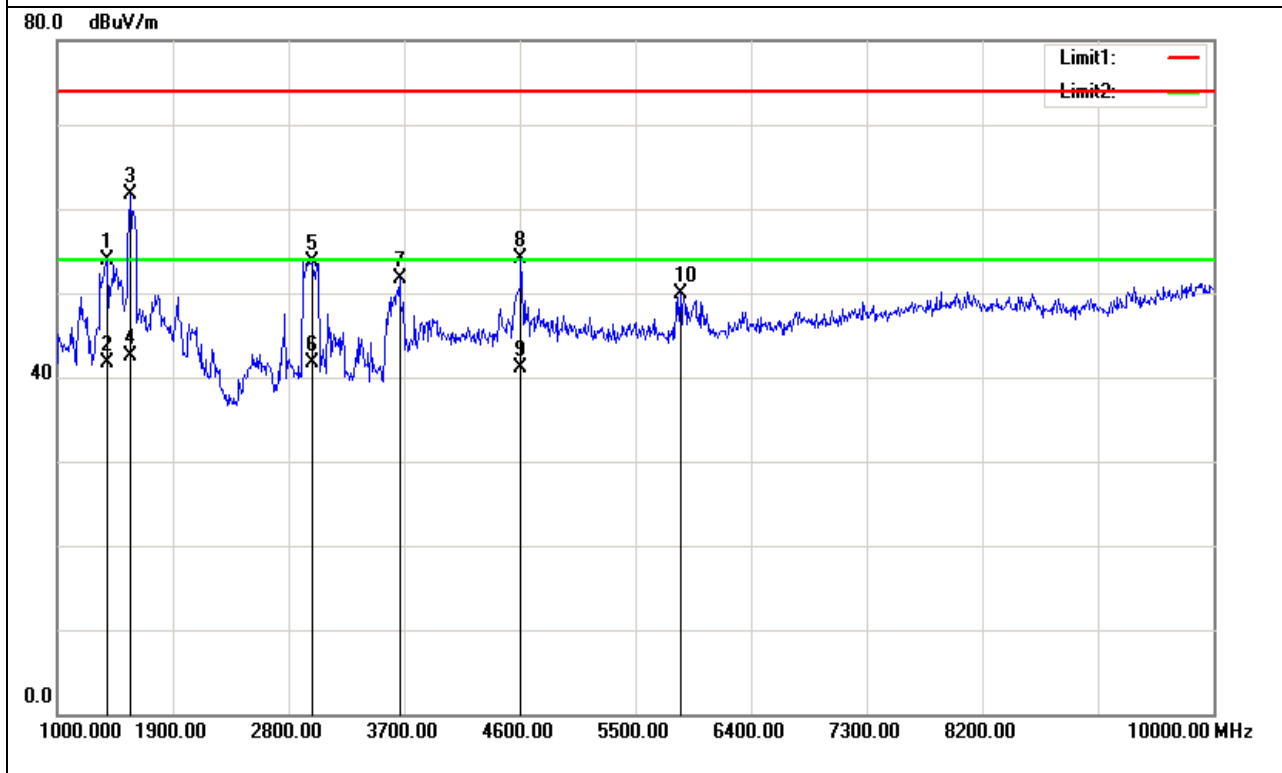


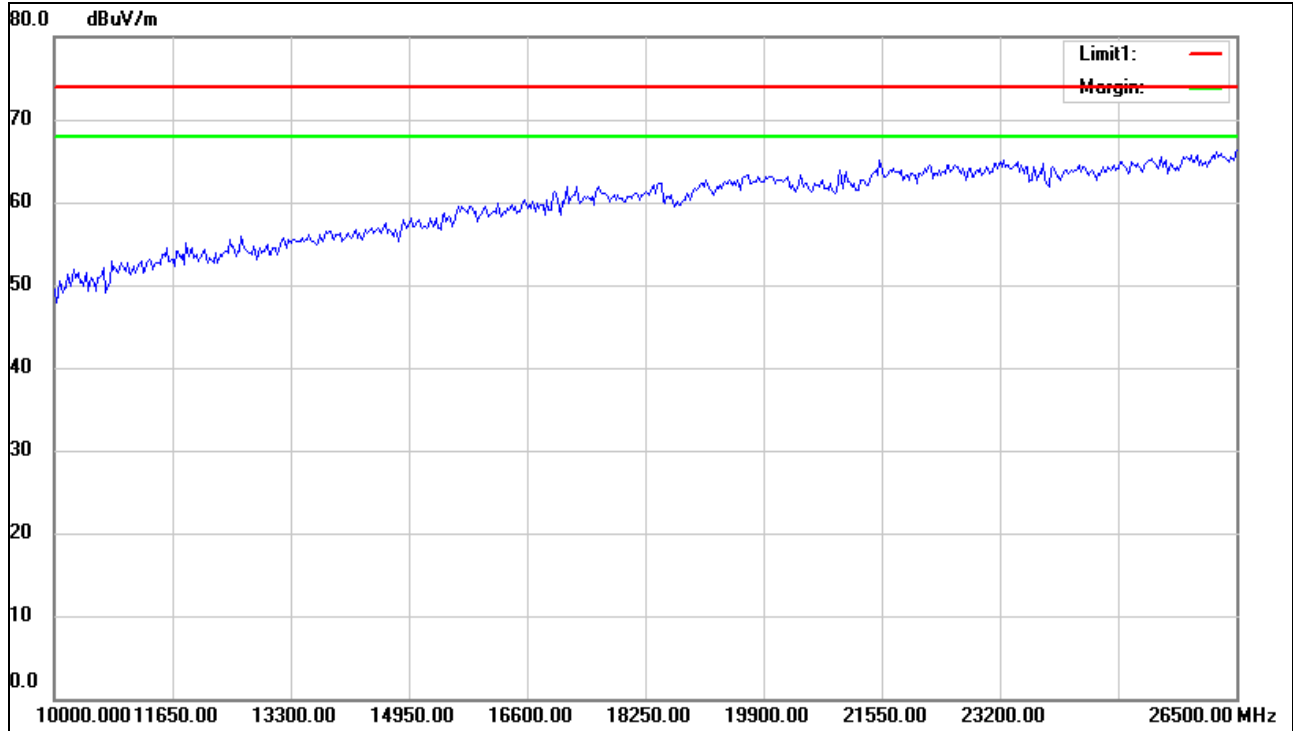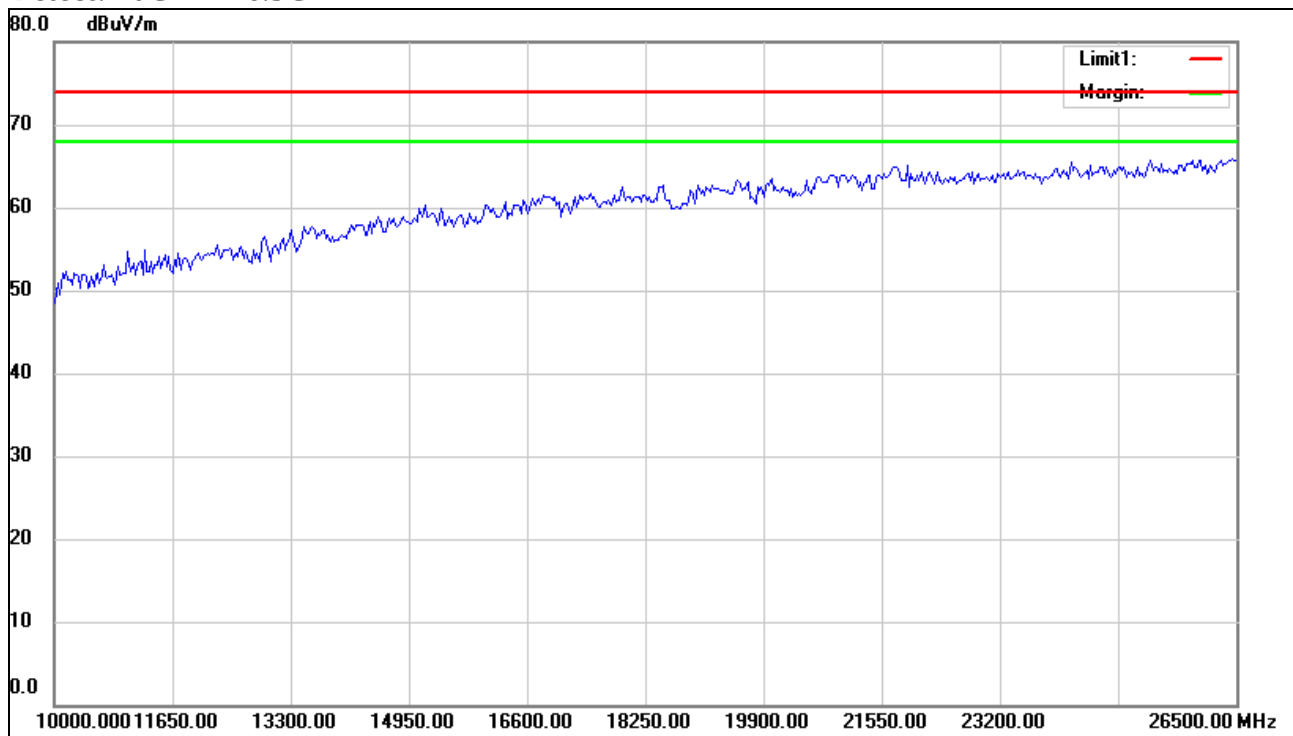Horizontal**Detect: 10GHz -26.5GHz****Vertical****Detect: 10GHz -26.5GHz**

EUT :	液晶顯示器	Model Name :	LE65K6500U
Temperature :	24 °C	Relative Humidity :	54%
Pressure :	1010 hPa	Test Date :	2018-03-26
Test Mode :	TX CH06 (802.11n20 : Rate 6.5Mbps)	Polarization :	Horizontal
Measurement Distance	3 m	Frenquency Range	1GHz to 25GHz
Test Power :	AC 110/60Hz		

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
1459.000	67.14	-6.95	60.19	74.00	-13.81	peak
1459.000	49.26	-6.95	42.31	54.00	-11.69	AVG
2764.000	52.76	-1.78	50.98	74.00	-23.02	peak
3034.000	56.82	-1.30	55.52	74.00	-18.48	peak
3034.000	42.86	-1.30	41.56	54.00	-12.44	AVG
3610.000	49.97	-0.06	49.91	74.00	-24.09	peak
4600.000	45.10	3.68	48.78	74.00	-25.22	peak
5824.000	48.46	6.01	54.47	74.00	-19.53	peak
5824.000	35.74	6.01	41.75	54.00	-12.25	AVG


Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

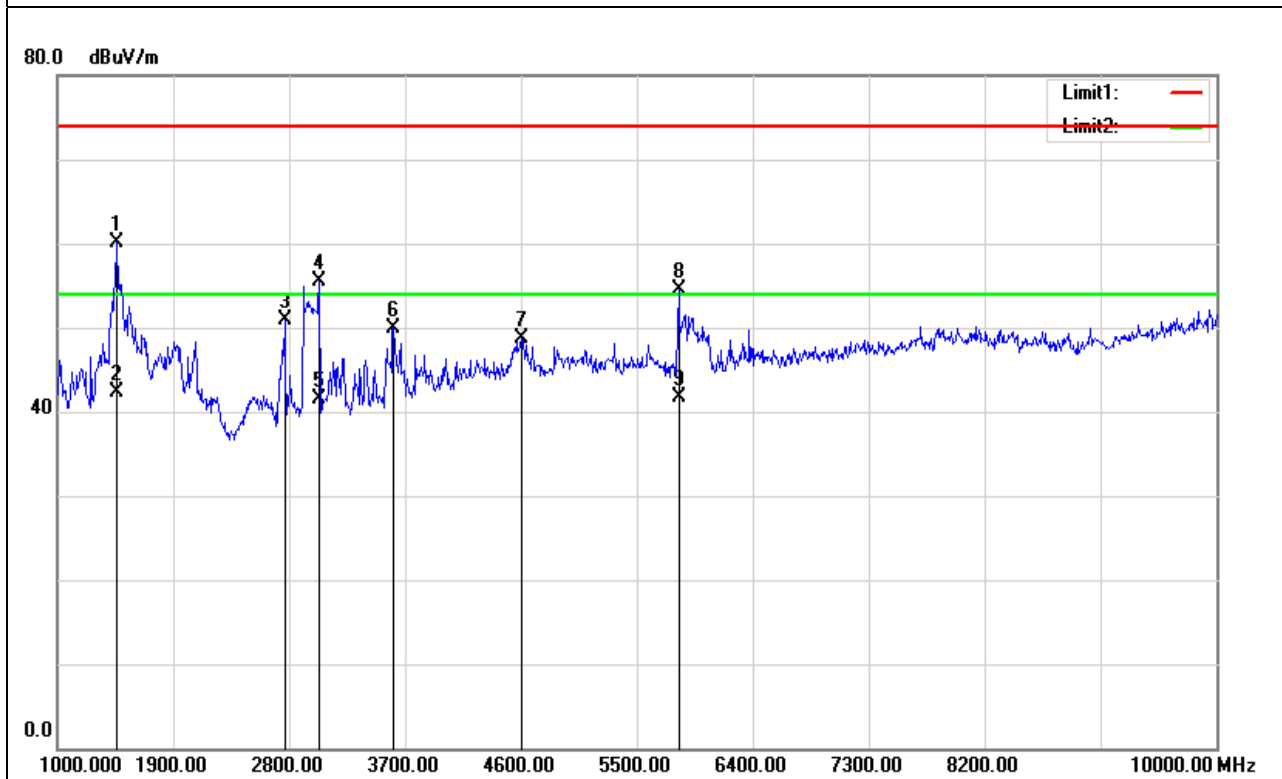

EUT :	液晶顯示器	Model Name :	LE65K6500U
Temperature :	24 °C	Relative Humidity :	54%
Pressure :	1010 hPa	Test Date :	2018-03-26
Test Mode :	TX CH06 (802.11n20 : Rate 6.5Mbps)	Polarization :	Vertical
Measurement Distance	3 m	Frenqucy Range	1GHz to 25GHz
Test Power :	AC 110/60Hz		


Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
1369.000	62.19	-7.17	55.02	74.00	-18.98	peak
1369.000	48.56	-7.17	41.39	54.00	-12.61	AVG
1576.000	68.08	-6.74	61.34	74.00	-12.66	peak
1576.000	49.02	-6.74	42.28	54.00	-11.72	AVG
1909.000	60.38	-5.58	54.80	74.00	-19.20	peak
1909.000	47.49	-5.58	41.91	54.00	-12.09	AVG
3034.000	57.02	-1.30	55.72	74.00	-18.28	peak
3034.000	42.65	-1.30	41.35	54.00	-12.65	AVG
3637.000	50.92	0.06	50.98	74.00	-23.02	peak
4591.000	48.42	3.65	52.07	74.00	-21.93	peak
4591.000	36.85	3.65	40.50	54.00	-13.50	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

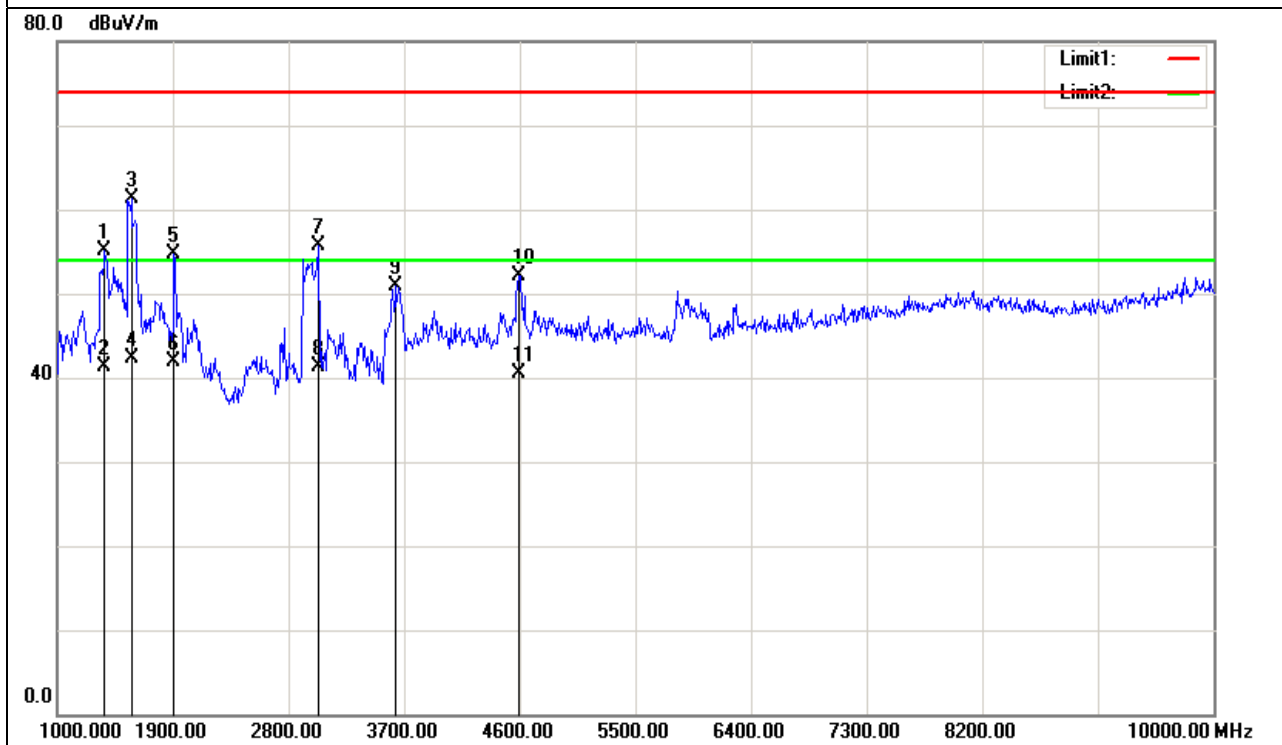


Horizontal

Detect: 10GHz -26.5GHz

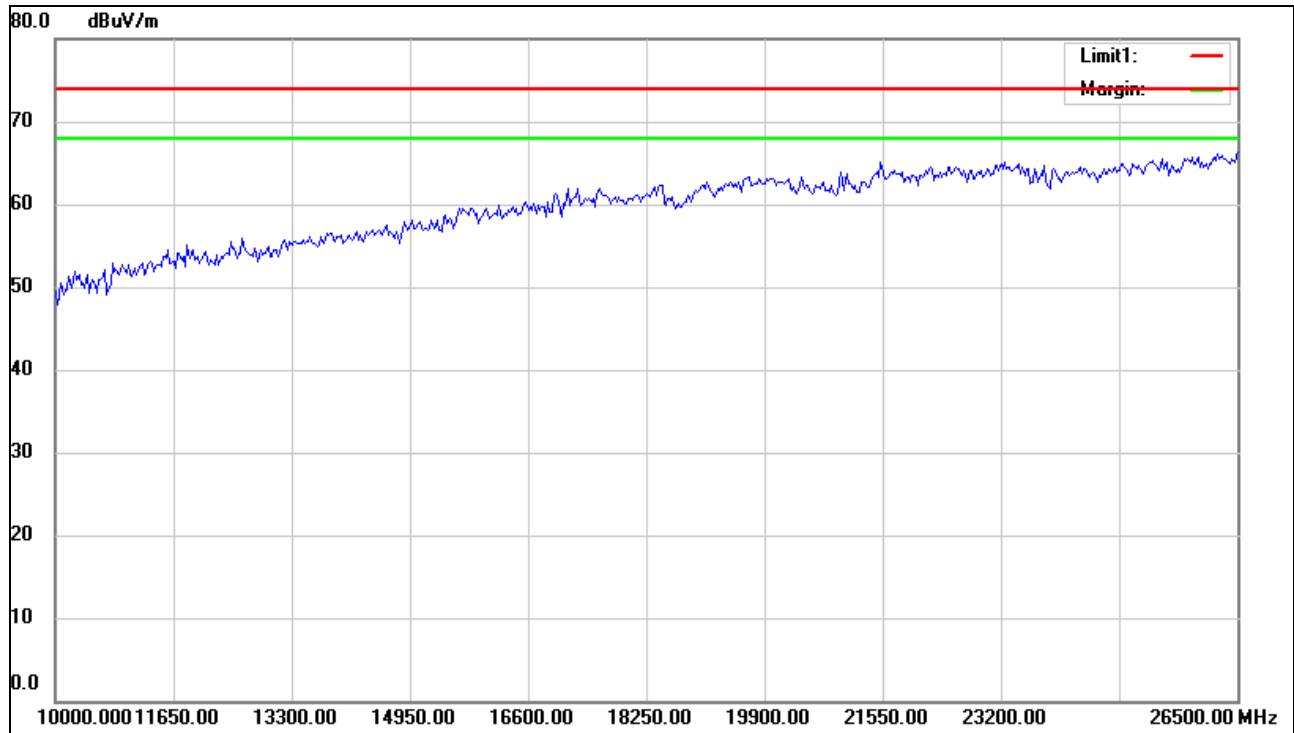

Vertical


Detect: 10GHz -26.5GHz

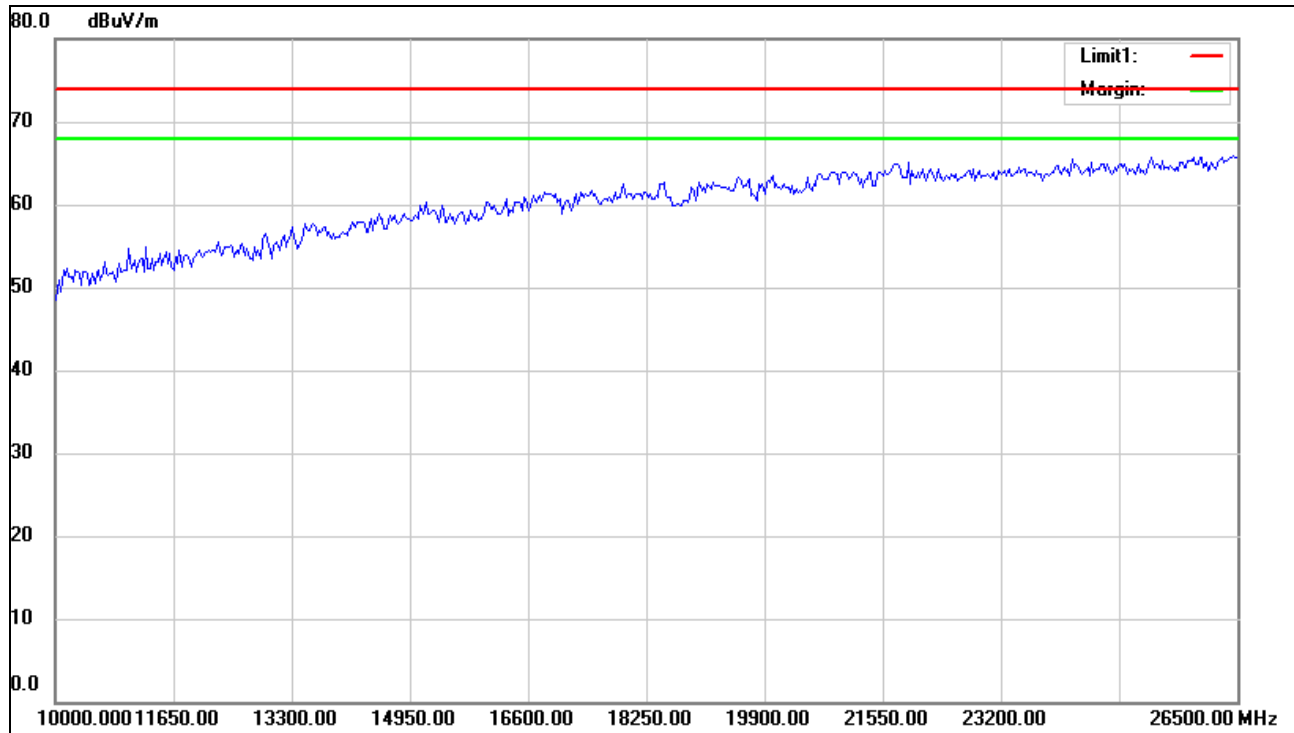

EUT :	液晶顯示器	Model Name :	LE65K6500U
Temperature :	24 °C	Relative Humidity :	54%
Pressure :	1010 hPa	Test Date :	2018-03-26
Test Mode :	TX CH11 (802.11n20 : Rate 6.5Mbps)	Polarization :	Horizontal
Measurement Distance	3 m	Frenqucy Range	1GHz to 25GHz
Test Power :	AC 110/60Hz		

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
1459.000	65.97	-6.95	59.02	74.00	-14.98	peak
1459.000	48.08	-6.95	41.13	54.00	-12.87	AVG
2764.000	51.18	-1.78	49.40	74.00	-24.60	peak
3034.000	56.72	-1.30	55.42	74.00	-18.58	peak
3034.000	42.66	-1.30	41.36	54.00	-12.64	AVG
3628.000	49.82	0.02	49.84	74.00	-24.16	peak
4654.000	48.39	3.85	52.24	74.00	-21.76	peak
4654.000	36.32	3.85	40.17	54.00	-13.83	AVG
5824.000	48.37	6.01	54.38	74.00	-19.62	peak
5824.000	34.68	6.01	40.69	54.00	-13.31	AVG


Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

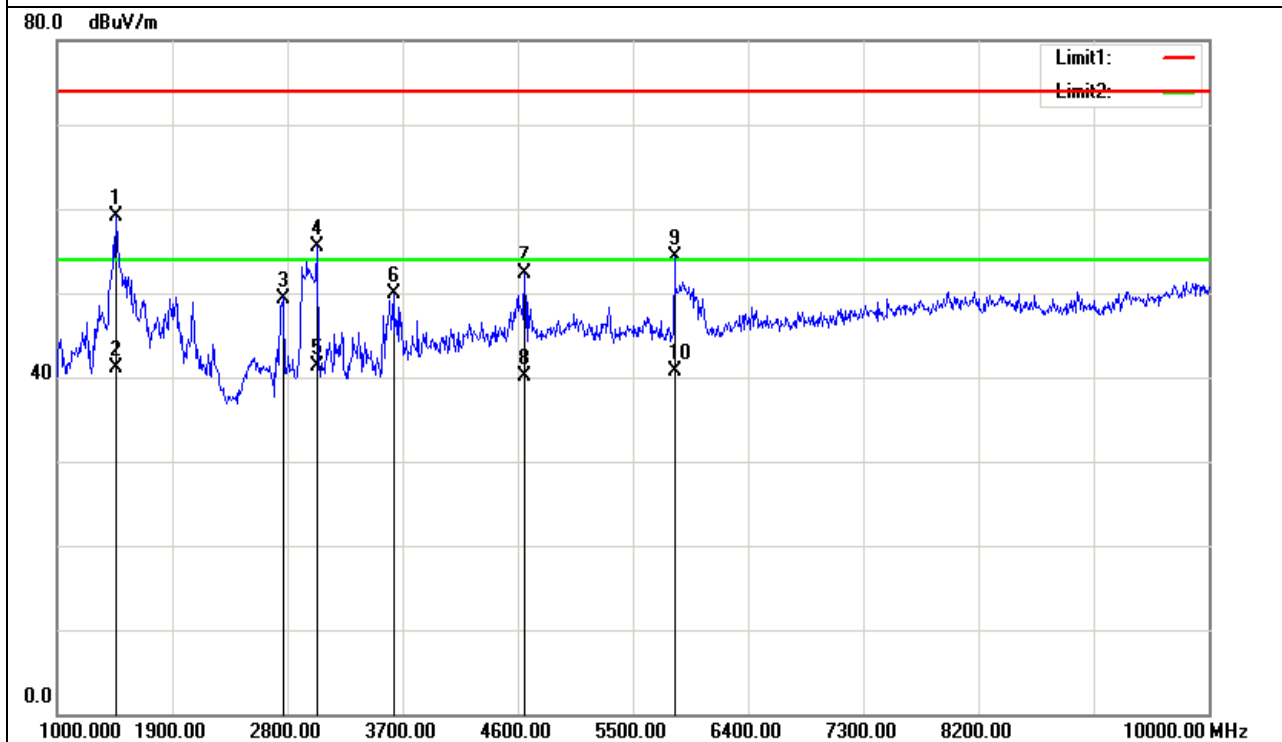

EUT :	液晶顯示器	Model Name :	LE65K6500U
Temperature :	24 °C	Relative Humidity :	54%
Pressure :	1010 hPa	Test Date :	2018-03-26
Test Mode :	TX CH11 (802.11n20 : Rate 6.5Mbps)	Polarization :	Vertical
Measurement Distance	3 m	Frenquency Range	1GHz to 25GHz
Test Power :	AC 110/60Hz		


Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
1378.000	60.87	-7.14	53.73	74.00	-20.27	peak
1378.000	47.30	-7.14	40.16	54.00	-13.84	AVG
1558.000	68.17	-6.78	61.39	74.00	-12.61	peak
1558.000	48.81	-6.78	42.03	54.00	-11.97	AVG
3007.000	55.27	-1.35	53.92	74.00	-20.08	peak
3007.000	43.06	-1.35	41.71	54.00	-12.29	AVG
3691.000	50.35	0.29	50.64	74.00	-23.36	peak
4618.000	50.36	3.73	54.09	74.00	-19.91	peak
4618.000	37.08	3.73	40.81	54.00	-13.19	AVG
6067.000	44.40	6.19	50.59	74.00	-23.41	peak

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

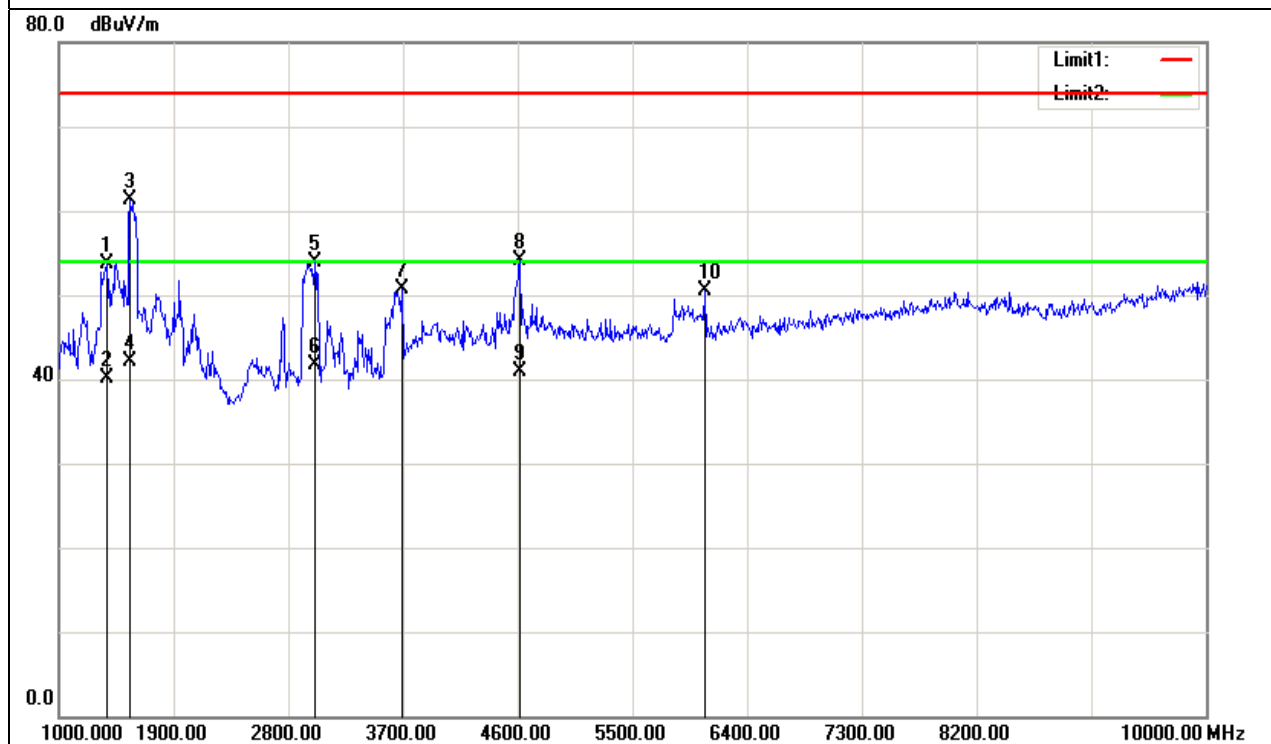


Horizontal

Detect: 10GHz -26.5GHz

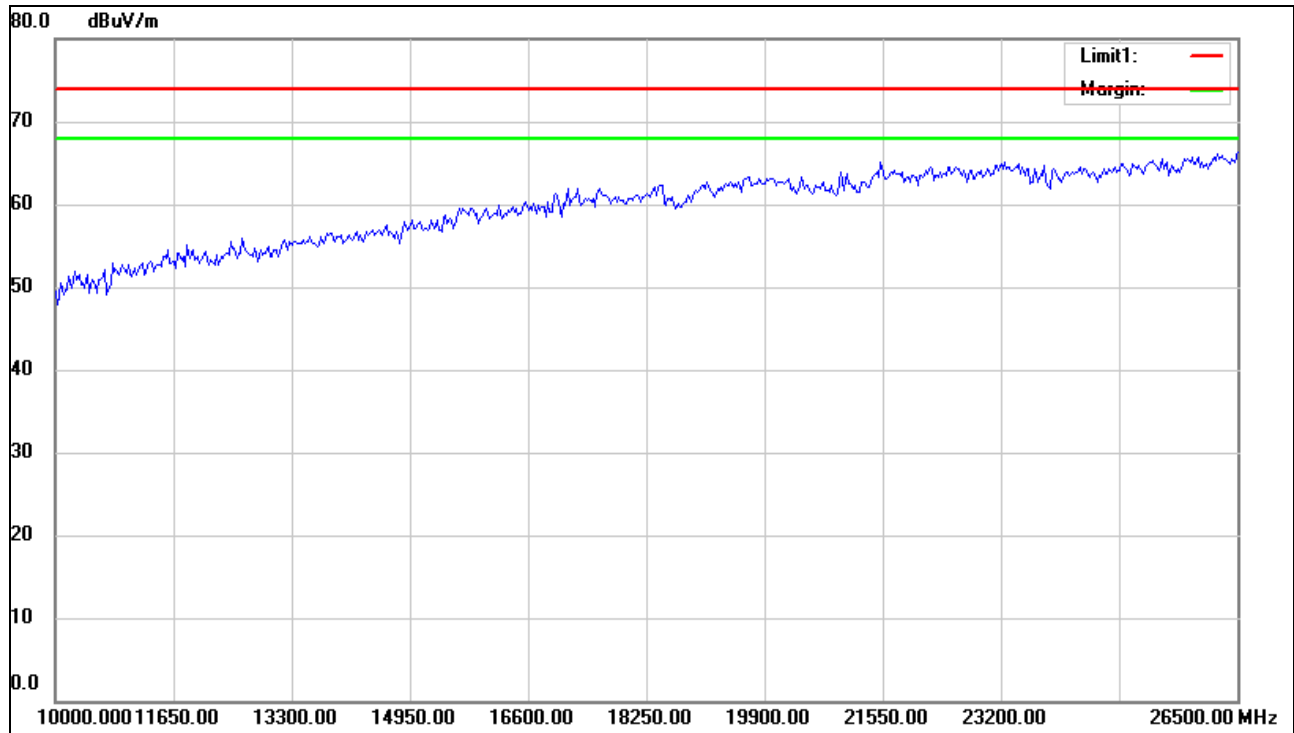

Vertical


Detect: 10GHz -26.5GHz

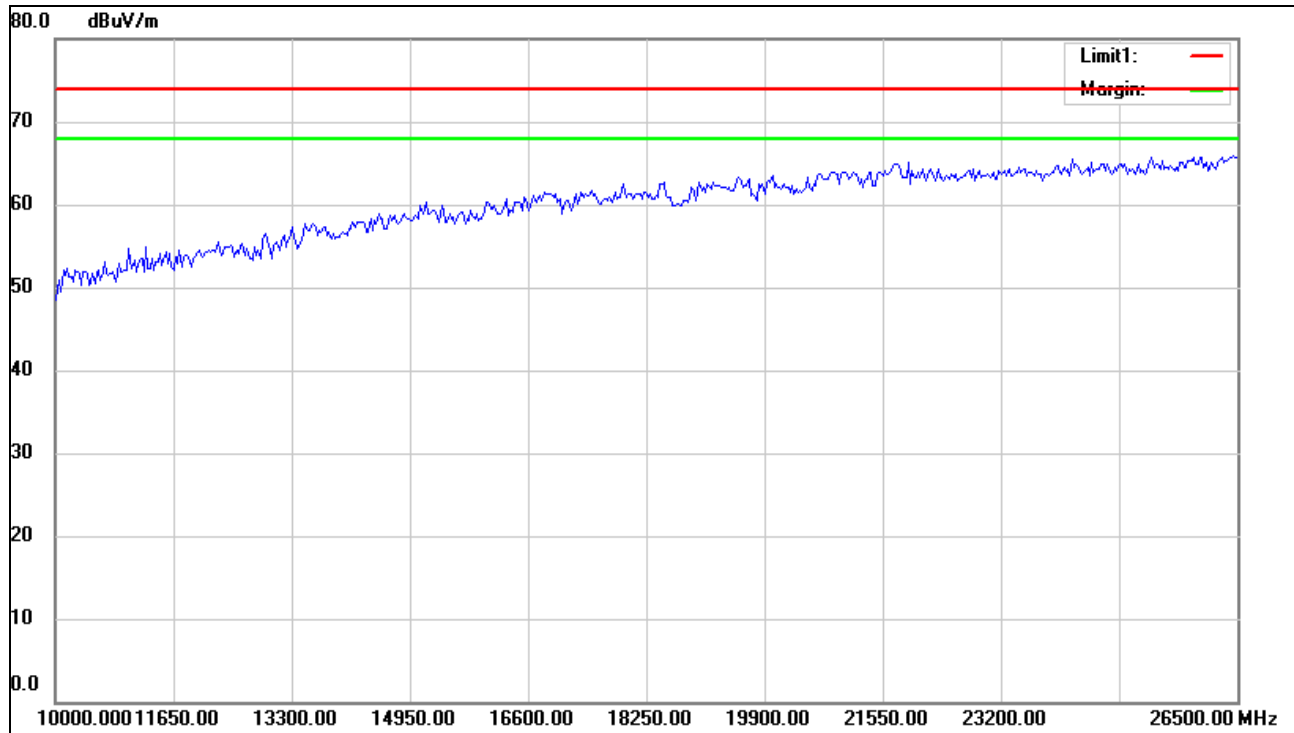

EUT :	液晶顯示器	Model Name :	LE65K6500U
Temperature :	24 °C	Relative Humidity :	54%
Pressure :	1010 hPa	Test Date :	2018-03-26
Test Mode :	TX CH03 (802.11n40 : Rate 13.5Mbps)	Polarization :	Horizontal
Measurement Distance	3 m	Frenqucy Range	1GHz to 25GHz
Test Power :	AC 110/60Hz		

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
1459.000	63.60	-6.95	56.65	74.00	-17.35	peak
1459.000	51.81	-6.95	44.86	54.00	-9.14	AVG
2773.000	53.29	-1.77	51.52	74.00	-22.48	peak
2908.000	55.16	-1.53	53.63	74.00	-20.37	peak
2908.000	40.69	-1.53	39.16	54.00	-14.84	AVG
3628.000	50.38	0.02	50.40	74.00	-23.60	peak
4627.000	46.62	3.76	50.38	74.00	-23.62	peak
5905.000	46.71	6.04	52.75	74.00	-21.25	peak
5905.000	33.41	6.04	39.45	54.00	-14.55	AVG


Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

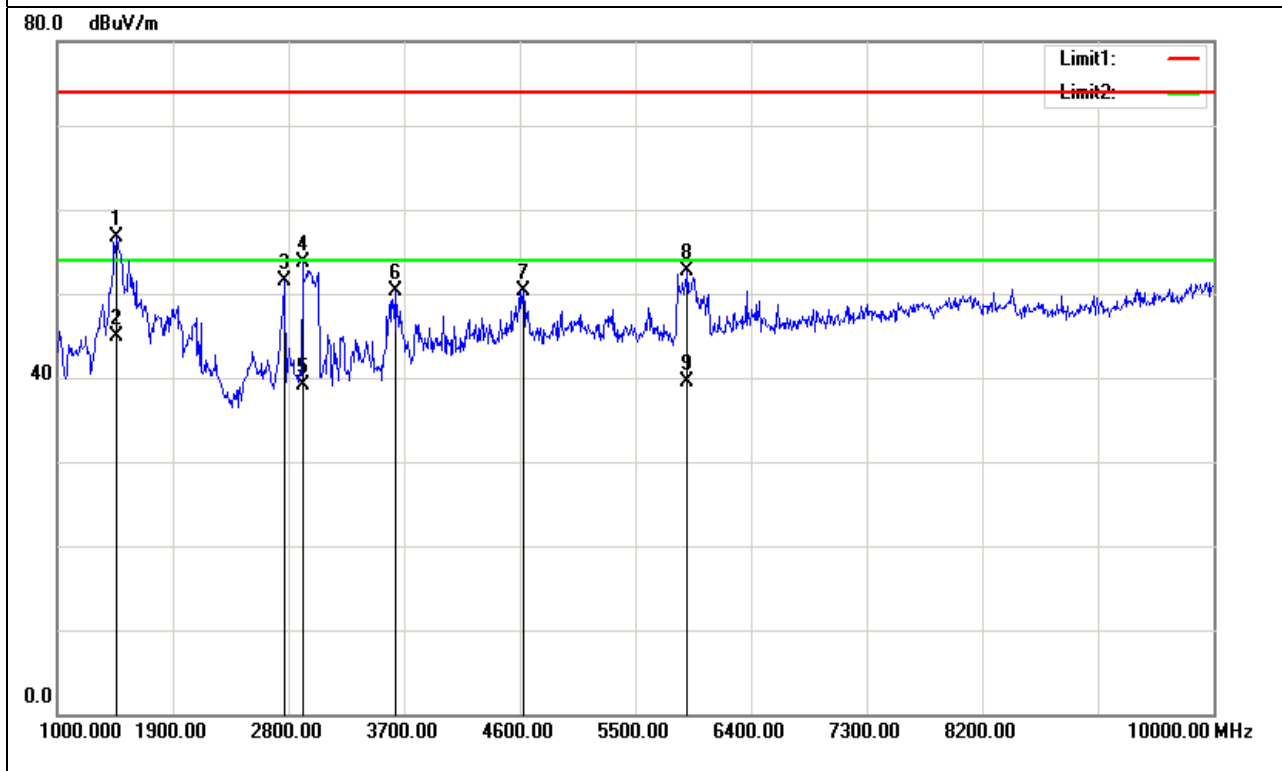

EUT :	液晶顯示器	Model Name :	LE65K6500U
Temperature :	24 °C	Relative Humidity :	54%
Pressure :	1010 hPa	Test Date :	2018-03-26
Test Mode :	TX CH03 (802.11n40 : Rate 13.5Mbps)	Polarization :	Vertical
Measurement Distance	3 m	Frenquency Range	1GHz to 25GHz
Test Power :	AC 110/60Hz		


Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
1351.000	62.12	-7.24	54.88	74.00	-19.12	peak
1351.000	48.53	-7.24	41.29	54.00	-12.71	AVG
1567.000	68.38	-6.76	61.62	74.00	-12.38	peak
1567.000	47.91	-6.76	41.15	54.00	-12.85	AVG
2980.000	55.12	-1.40	53.72	74.00	-20.28	peak
2980.000	43.04	-1.40	41.64	54.00	-12.36	AVG
3646.000	51.22	0.10	51.32	74.00	-22.68	peak
4600.000	47.88	3.68	51.56	74.00	-22.44	peak
5887.000	43.78	6.03	49.81	74.00	-24.19	peak

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

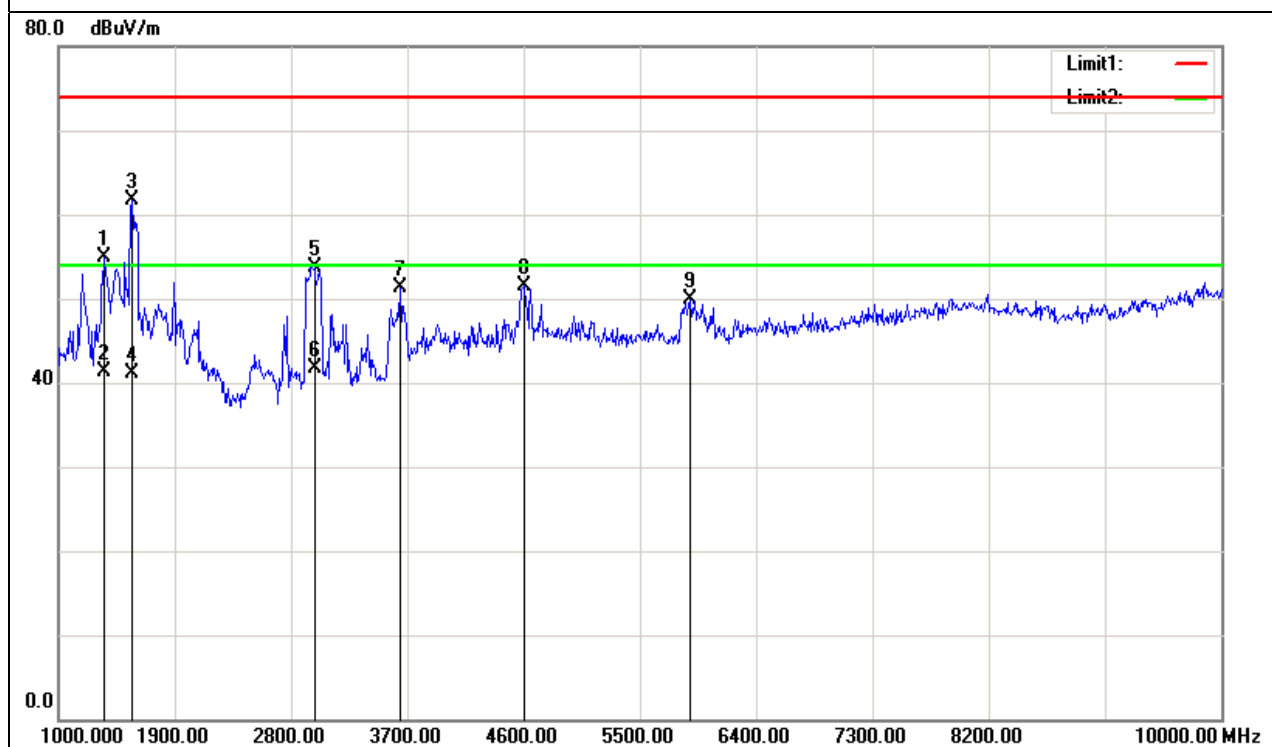


Horizontal

Detect: 10GHz -26.5GHz

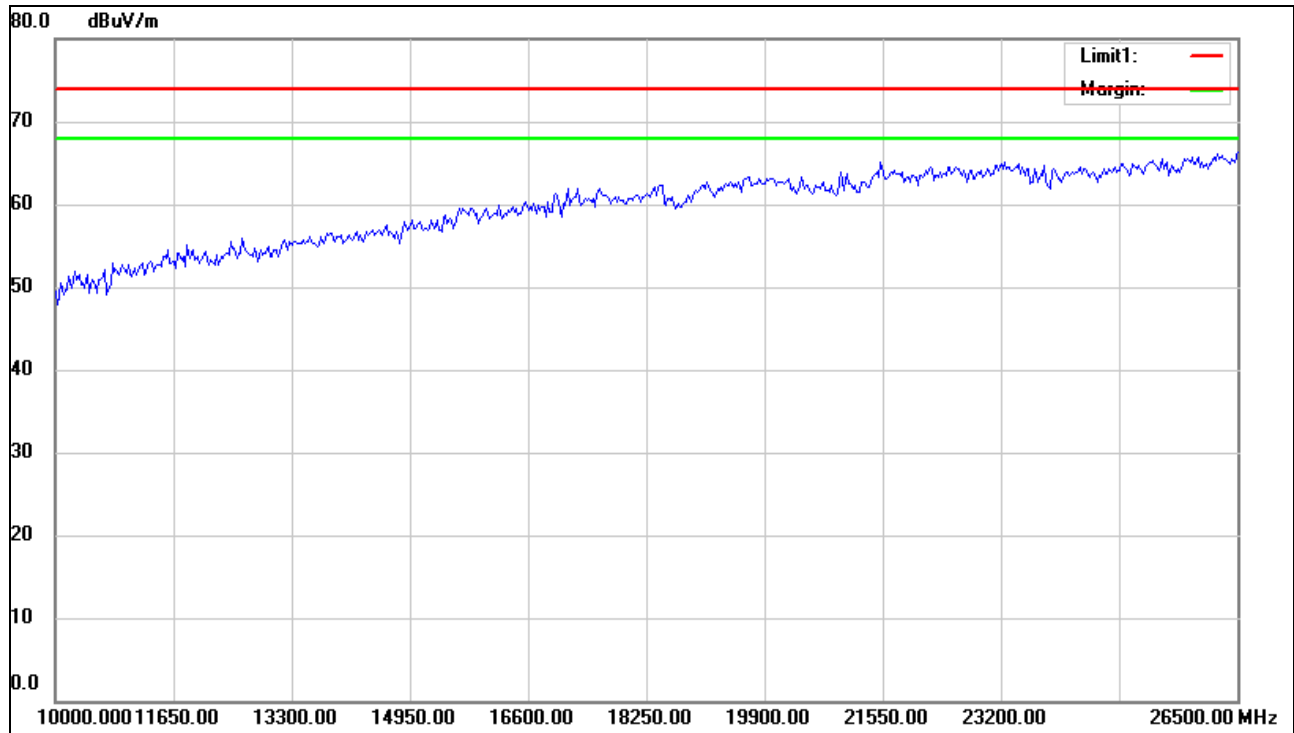

Vertical


Detect: 10GHz -26.5GHz

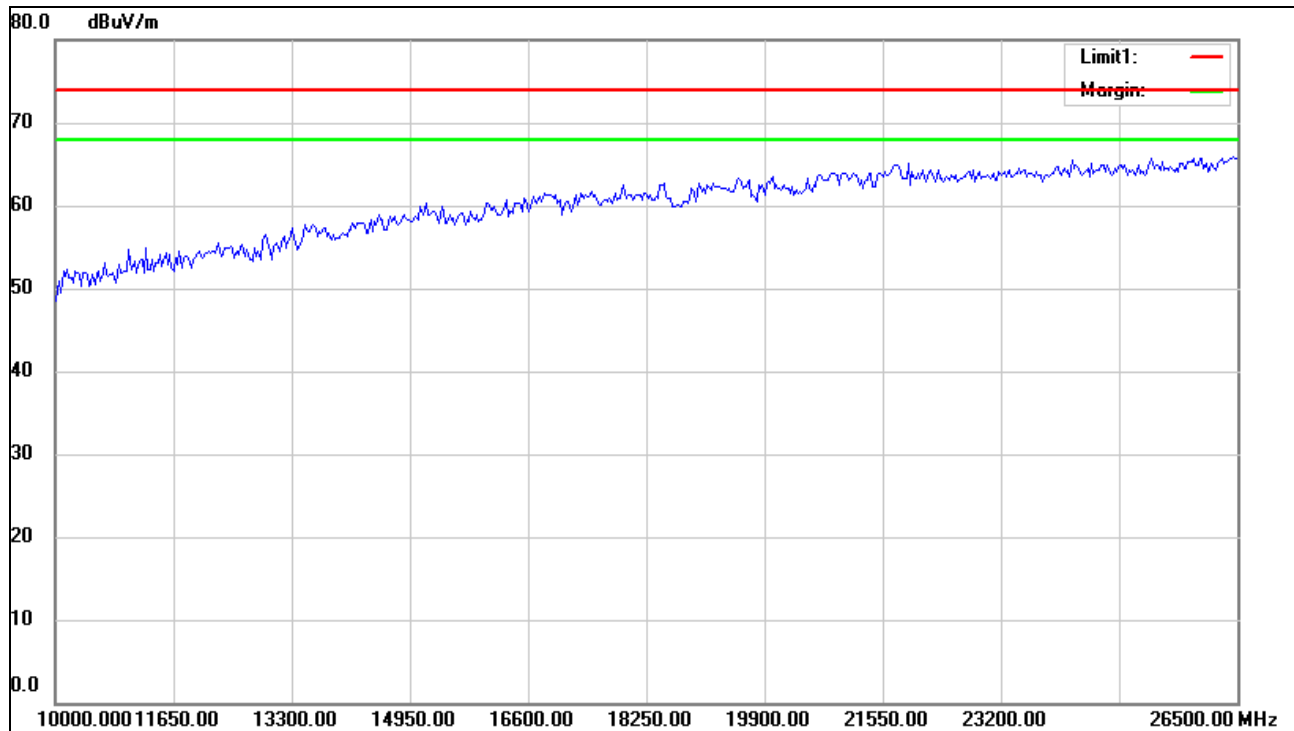

EUT :	液晶顯示器	Model Name :	LE65K6500U
Temperature :	24 °C	Relative Humidity :	54%
Pressure :	1010 hPa	Test Date :	2018-03-26
Test Mode :	TX CH06 (802.11n40 : Rate 13.5Mbps)	Polarization :	Horizontal
Measurement Distance	3 m	Frenqucy Range	1GHz to 25GHz
Test Power :	AC 110/60Hz		

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
1459.000	66.14	-6.95	59.19	74.00	-14.81	peak
1459.000	48.64	-6.95	41.69	54.00	-12.31	AVG
2908.000	56.39	-1.53	54.86	74.00	-19.14	peak
2908.000	43.10	-1.53	41.57	54.00	-12.43	AVG
3322.000	49.43	-0.82	48.61	74.00	-25.39	peak
3628.000	49.11	0.02	49.13	74.00	-24.87	peak
4618.000	46.69	3.73	50.42	74.00	-23.58	peak
5824.000	46.52	6.01	52.53	74.00	-21.47	peak
5824.000	34.86	6.01	40.87	54.00	-13.13	AVG


Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

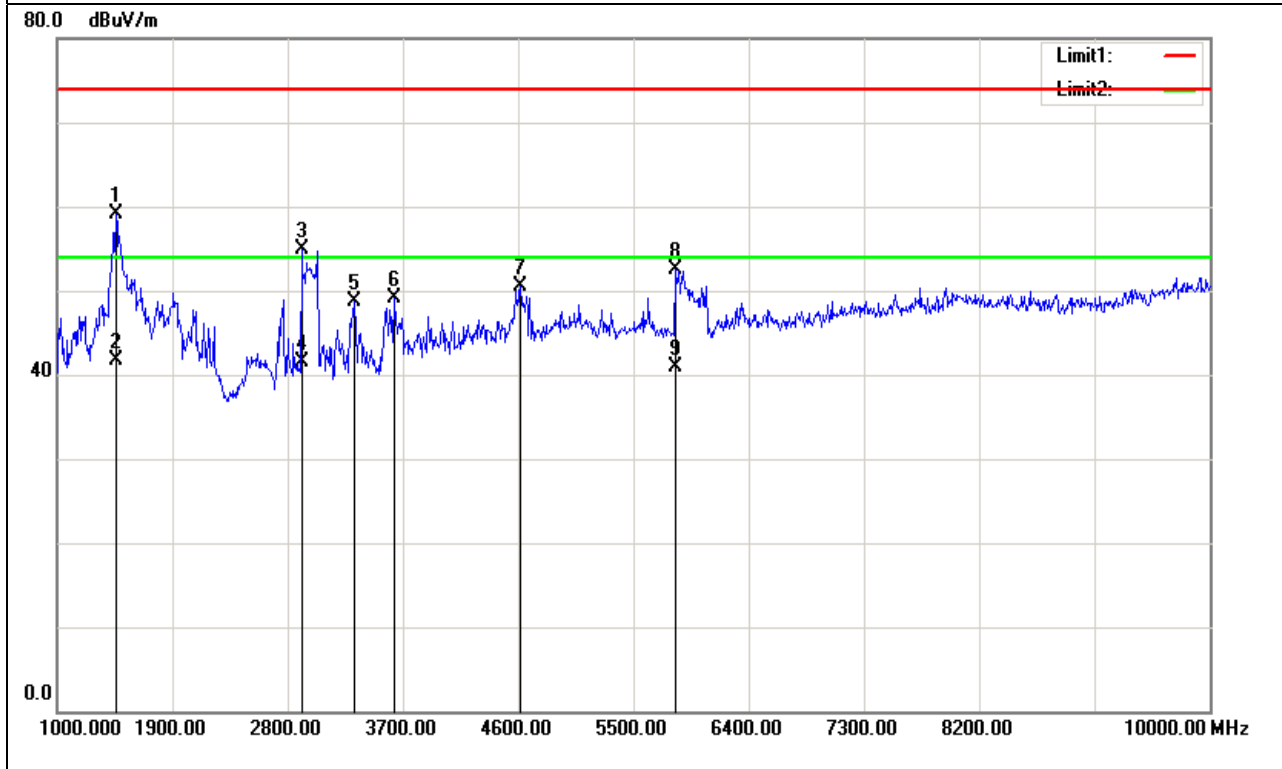

EUT :	液晶顯示器	Model Name :	LE65K6500U
Temperature :	24 °C	Relative Humidity :	54%
Pressure :	1010 hPa	Test Date :	2018-03-26
Test Mode :	TX CH06 (802.11n40 : Rate 13.5Mbps)	Polarization :	Vertical
Measurement Distance	3 m	Frenqucy Range	1GHz to 25GHz
Test Power :	AC 110/60Hz		


Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
1576.000	68.32	-6.74	61.58	74.00	-12.42	peak
1576.000	46.90	-6.74	40.16	54.00	-13.84	AVG
2971.000	55.59	-1.41	54.18	74.00	-19.82	peak
2971.000	43.48	-1.41	42.07	54.00	-11.93	AVG
3142.000	53.43	-1.12	52.31	74.00	-21.69	peak
3142.000	42.15	-1.12	41.03	54.00	-12.97	AVG
3682.000	50.38	0.25	50.63	74.00	-23.37	peak
4609.000	48.31	3.71	52.02	74.00	-21.98	peak
4609.000	37.23	3.71	40.94	54.00	-13.06	AVG
5824.000	44.11	6.01	50.12	74.00	-23.88	peak

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

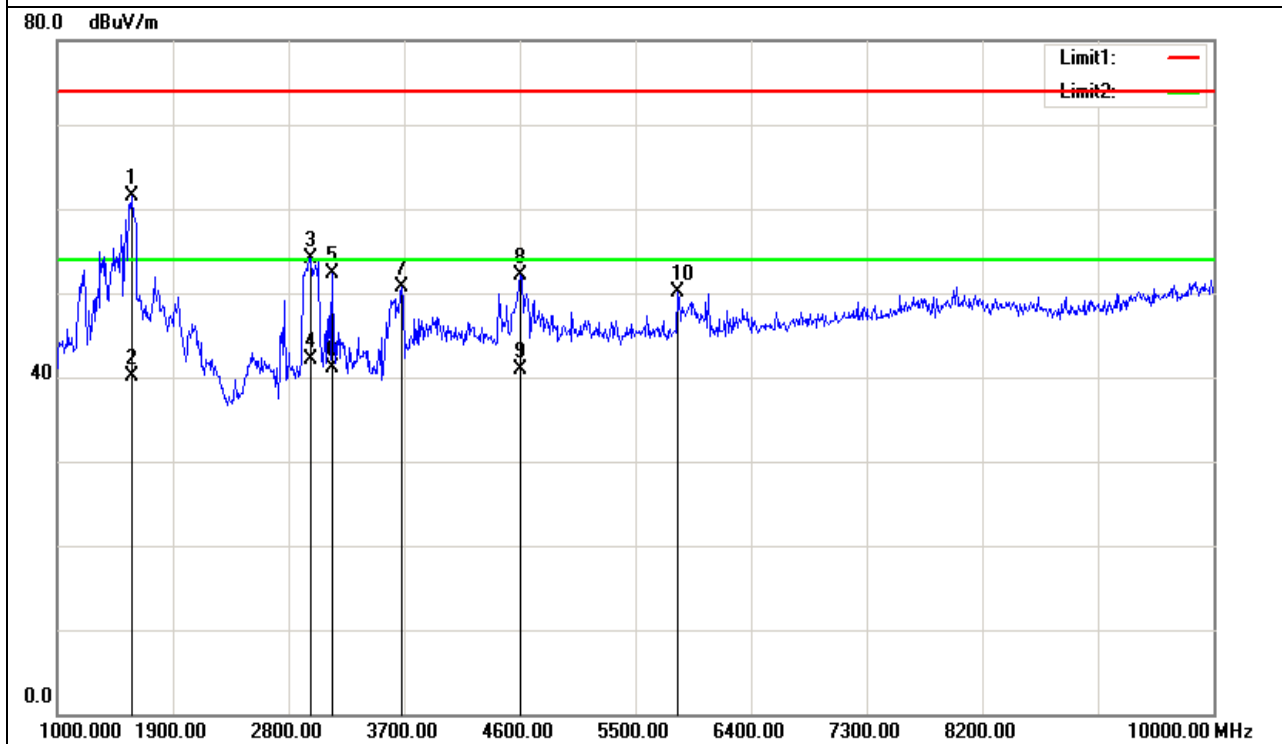


Horizontal

Detect: 10GHz -26.5GHz

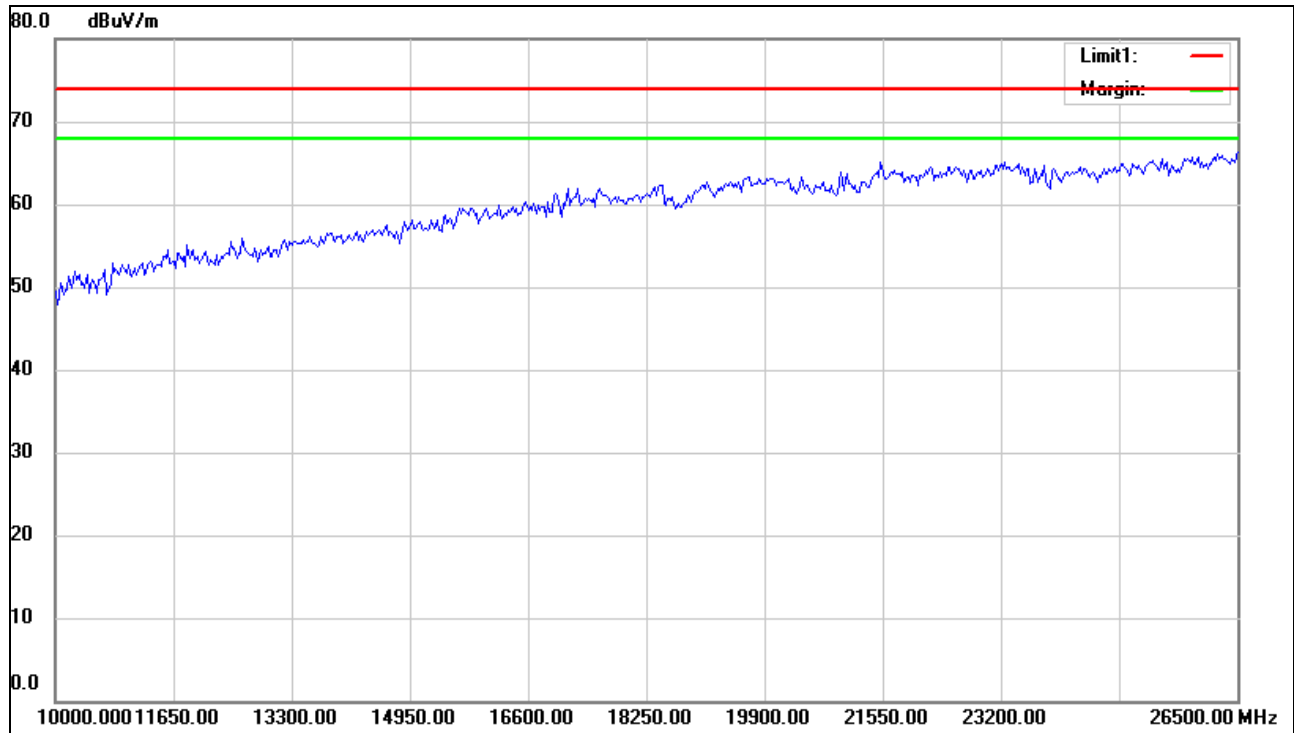

Vertical


Detect: 10GHz -26.5GHz

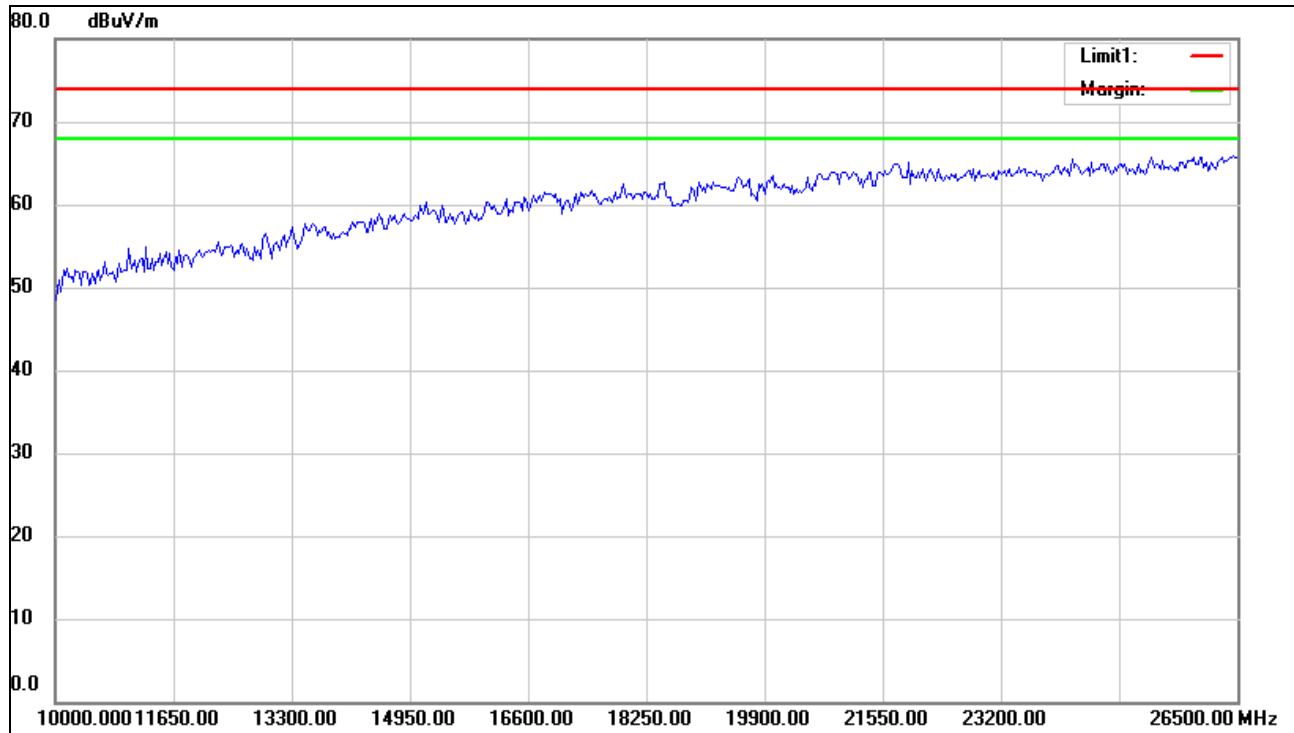

EUT :	液晶顯示器	Model Name :	LE65K6000U
Temperature :	24 °C	Relative Humidity :	54%
Pressure :	1010 hPa	Test Date :	2018-03-26
Test Mode :	TX CH09 (802.11n40 : Rate 13.5Mbps)	Polarization :	Horizontal
Measurement Distance	3 m	Frenquency Range	1GHz to 25GHz
Test Power :	AC 110/60Hz		

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
1459.000	64.10	-6.95	57.15	74.00	-16.85	peak
1459.000	48.08	-6.95	41.13	54.00	-12.87	AVG
2764.000	53.78	-1.78	52.00	74.00	-22.00	peak
3034.000	56.93	-1.30	55.63	74.00	-18.37	peak
3034.000	41.96	-1.30	40.66	54.00	-13.34	AVG
3619.000	50.41	-0.02	50.39	74.00	-23.61	peak
4600.000	45.95	3.68	49.63	74.00	-24.37	peak
5869.000	46.11	6.02	52.13	74.00	-21.87	peak
5869.000	34.71	6.02	40.73	54.00	-13.27	AVG


Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

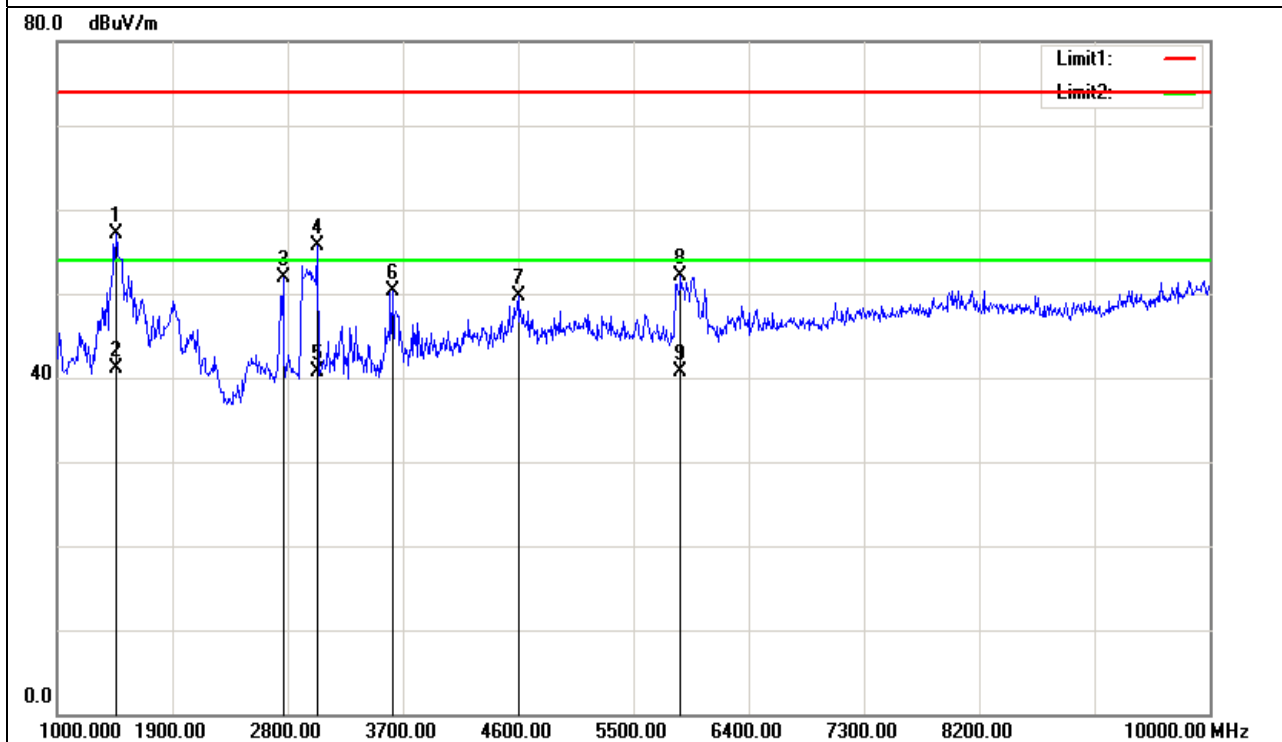

EUT :	液晶顯示器	Model Name :	LE65K6500U
Temperature :	24 °C	Relative Humidity :	54%
Pressure :	1010 hPa	Test Date :	2018-03-26
Test Mode :	TX CH09 (802.11n40 : Rate 13.5Mbps)	Polarization :	Vertical
Measurement Distance	3 m	Frenquency Range	1GHz to 25GHz
Test Power :	AC 110/60Hz		


Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
1351.000	63.91	-7.24	56.67	74.00	-17.33	peak
1351.000	48.82	-7.24	41.58	54.00	-12.42	AVG
1567.000	67.65	-6.76	60.89	74.00	-13.11	peak
1567.000	47.77	-6.76	41.01	54.00	-12.99	AVG
2971.000	55.63	-1.41	54.22	74.00	-19.78	peak
2971.000	41.77	-1.41	40.36	54.00	-13.64	AVG
3646.000	49.70	0.10	49.80	74.00	-24.20	peak
4618.000	51.41	3.73	55.14	74.00	-18.86	peak
4618.000	37.42	3.73	41.15	54.00	-12.85	AVG
5824.000	44.68	6.01	50.69	74.00	-23.31	peak

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

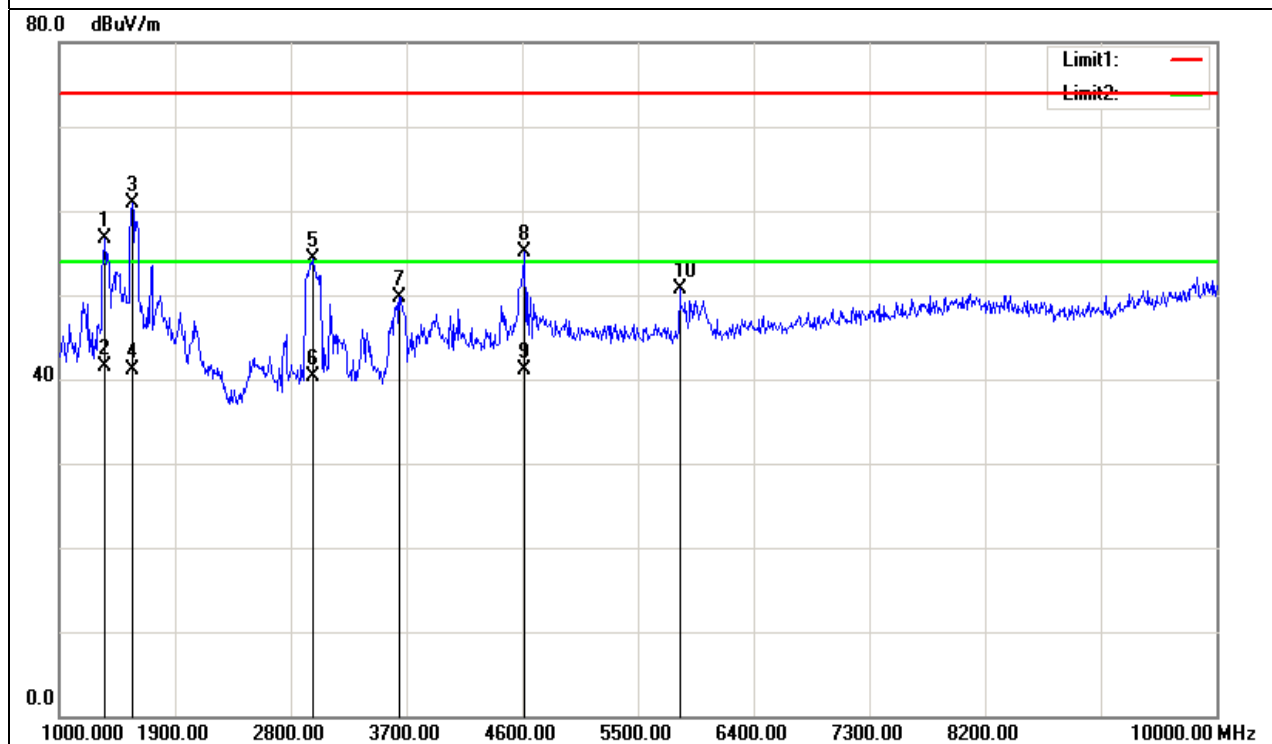


Horizontal

Detect: 10GHz -26.5GHz

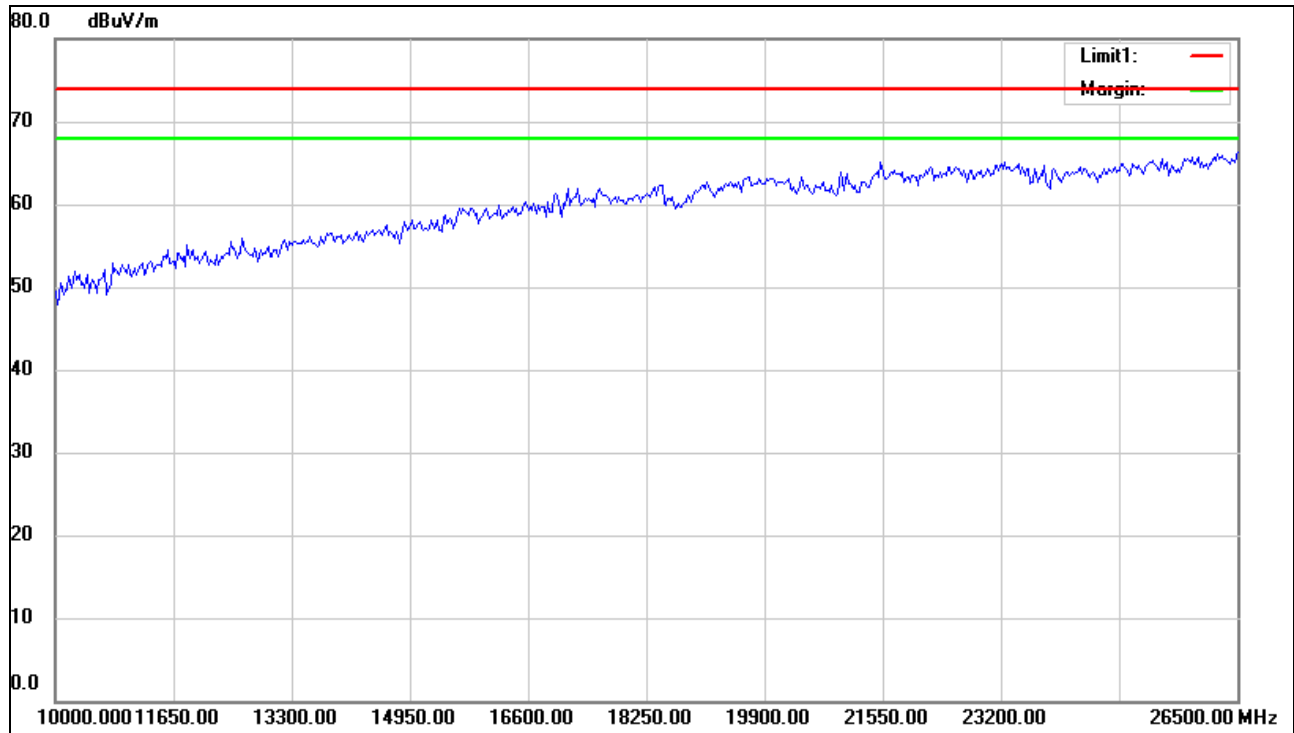

Vertical


Detect: 10GHz -26.5GHz

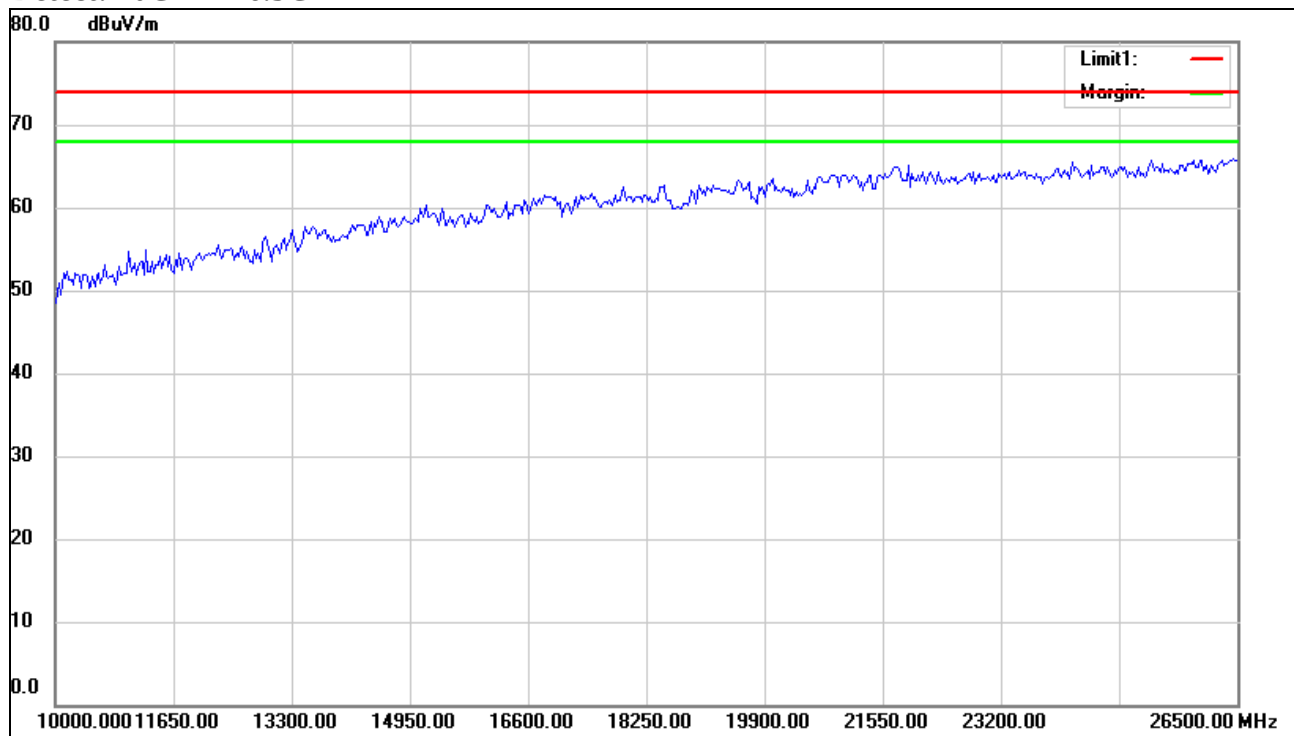

EUT :	液晶顯示器	Model Name :	LE65K6500U
Temperature :	24 °C	Relative Humidity :	54%
Pressure :	1010 hPa	Test Date :	2018-03-26
Test Mode :	RX	Polarization :	Horizontal
Measurement Distance	3 m	Frenquency Range	1GHz to 25GHz
Test Power :	AC 110/60Hz		

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
1486.000	68.17	-6.91	61.26	74.00	-12.74	peak
1486.000	54.42	-6.91	47.51	54.00	-6.49	AVG
2764.000	63.66	-1.78	61.88	74.00	-12.12	peak
2764.000	35.94	-1.78	34.16	54.00	-19.84	AVG
2908.000	61.61	-1.53	60.08	74.00	-13.92	peak
2908.000	35.10	-1.53	33.57	54.00	-20.43	AVG
3664.000	51.93	0.17	52.10	74.00	-21.90	peak
3664.000	34.65	0.17	34.82	54.00	-19.18	AVG
4591.000	48.48	3.65	52.13	74.00	-21.87	peak
4591.000	29.37	3.65	33.02	74.00	-40.98	peak
5860.000	48.29	6.02	54.31	74.00	-19.69	peak
5860.000	28.23	6.02	34.25	54.00	-19.75	AVG


Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.


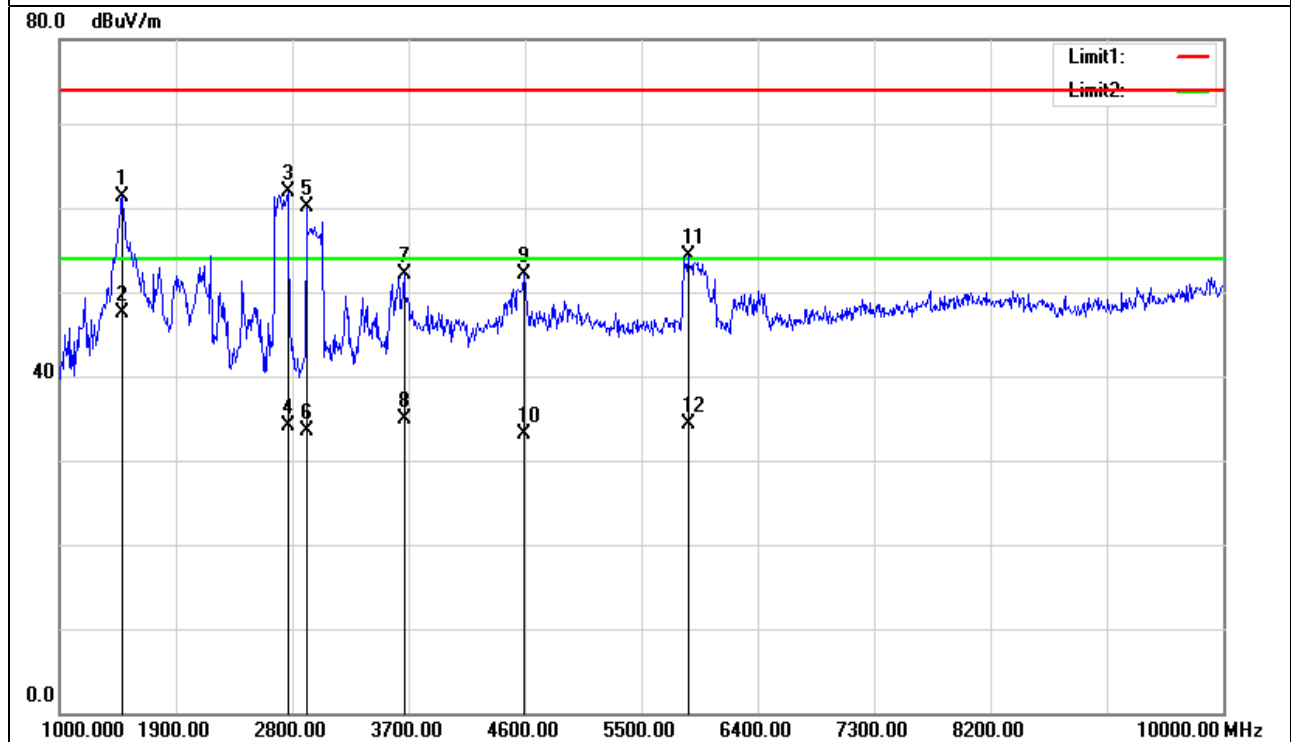


EUT :	液晶顯示器	Model Name :	LE65K6500U
Temperature :	24 °C	Relative Humidity :	54%
Pressure :	1010 hPa	Test Date :	2018-03-26
Test Mode :	RX	Polarization :	Vertical
Measurement Distance	3 m	Frenquency Range	1GHz to 25GHz
Test Power :	AC 110/60Hz		

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
1468.000	66.73	-6.94	59.79	74.00	-14.21	peak
1468.000	49.58	-6.94	42.64	54.00	-11.36	AVG
1576.000	66.98	-6.74	60.24	74.00	-13.76	peak
1576.000	47.45	-6.74	40.71	54.00	-13.29	AVG
2773.000	62.23	-1.77	60.46	74.00	-13.54	peak
2773.000	35.19	-1.77	33.42	54.00	-20.58	AVG
3034.000	56.71	-1.30	55.41	74.00	-18.59	peak
3034.000	35.58	-1.30	34.28	54.00	-19.72	AVG
4600.000	47.52	3.68	51.20	74.00	-22.80	peak
5824.000	47.12	6.01	53.13	74.00	-20.87	peak

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

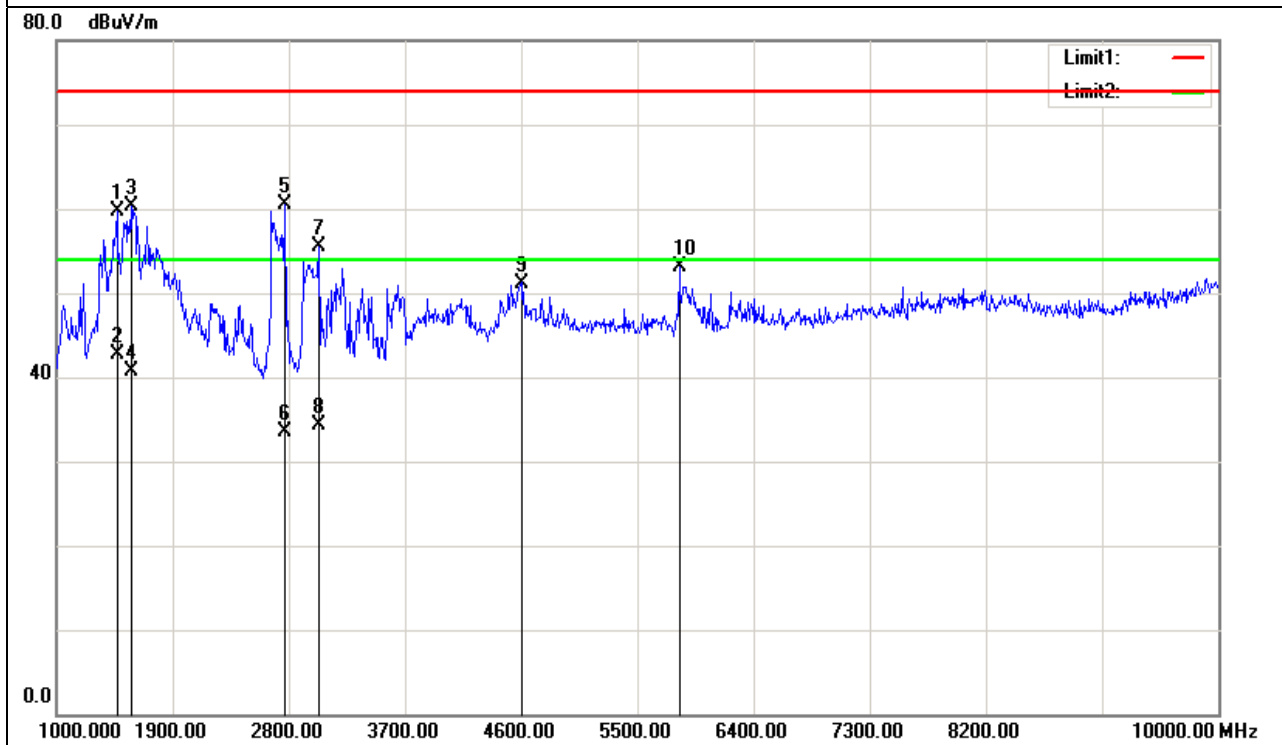

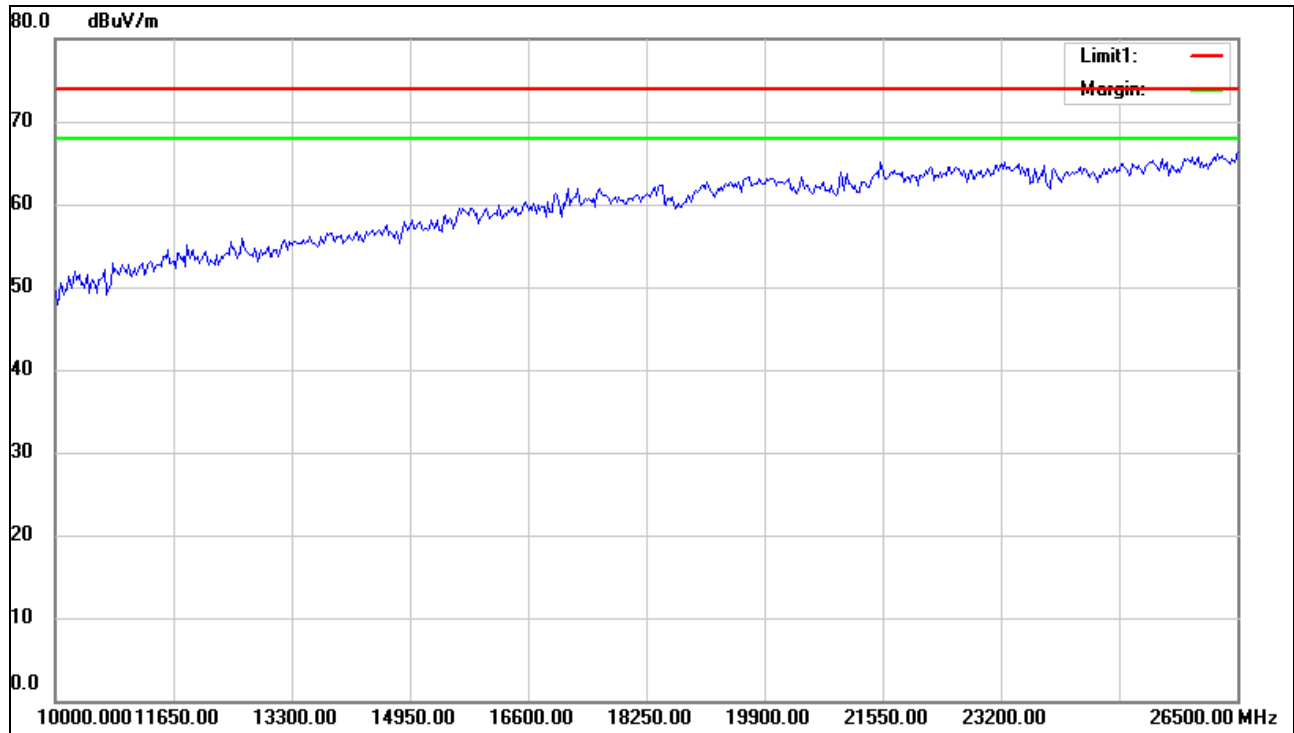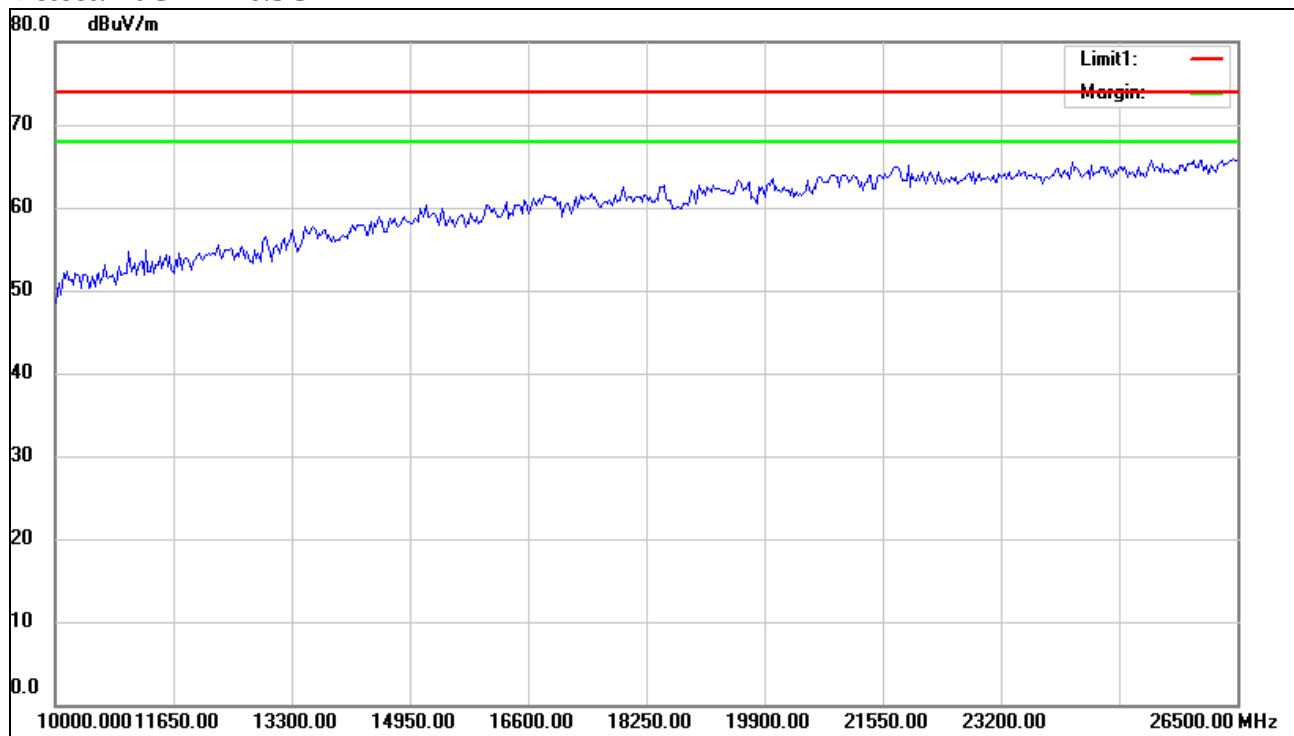
Horizontal**Detect: 10GHz -26.5GHz**Vertical**Detect: 10GHz -26.5GHz**

Power board: TV6505-ZC02-01

EUT :	液晶顯示器	Model Name :	LE65K6500U
Temperature :	26 °C	Relative Humidity :	60%
Pressure :	1010 hPa	Test Date :	2019-03-31
Test Mode :	TX CH01 (802.11b :Rate 1Mbps)	Polarization :	Horizontal
Measurement Distance	3 m	Frenqucy Range	1GHz to 25GHz
Test Power :	AC 110/60Hz		

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
1486.000	62.44	-5.37	57.07	74.00	-16.93	peak
1486.000	51.63	-5.37	46.26	54.00	-7.74	AVG
1576.000	60.27	-4.89	55.38	74.00	-18.62	peak
1576.000	50.40	-4.89	45.51	54.00	-8.49	AVG
2764.000	48.15	-0.10	48.05	74.00	-25.95	peak
3034.000	55.31	0.91	56.22	74.00	-17.78	peak
3034.000	45.48	0.91	46.39	54.00	-7.61	AVG
5824.000	48.35	4.70	53.05	74.00	-20.95	peak
5824.000	40.92	4.70	45.62	54.00	-8.38	AVG
6337.000	42.92	5.77	48.69	74.00	-25.31	peak


Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

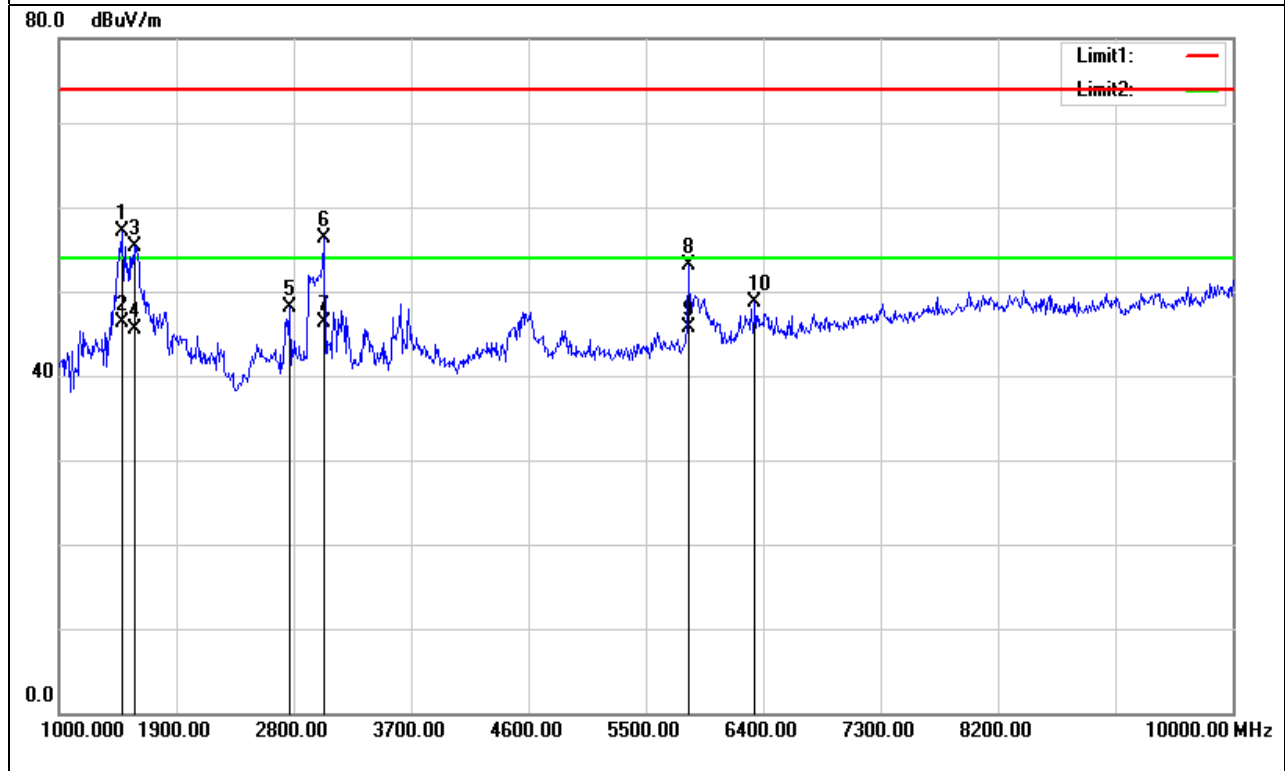

EUT :	液晶顯示器	Model Name :	LE65K6500U
Temperature :	26 °C	Relative Humidity :	60%
Pressure :	1010 hPa	Test Date :	2019-03-31
Test Mode :	TX CH01 (802.11b :Rate 1Mbps)	Polarization :	Vertical
Measurement Distance	3 m	Frenqucy Range	1GHz to 25GHz
Test Power :	AC 110/60Hz		


Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
1369.000	60.73	-5.68	55.05	74.00	-18.95	peak
1369.000	48.94	-5.68	43.26	54.00	-10.74	AVG
1603.000	66.08	-4.72	61.36	74.00	-12.64	peak
1603.000	49.45	-4.72	44.73	54.00	-9.27	AVG
1774.000	58.84	-3.70	55.14	74.00	-18.86	peak
1774.000	45.77	-3.70	42.07	54.00	-11.93	AVG
2134.000	56.62	-2.06	54.56	74.00	-19.44	peak
2134.000	43.58	-2.06	41.52	54.00	-12.48	AVG
2764.000	53.29	-0.10	53.19	74.00	-20.81	peak
2764.000	39.97	-0.10	39.87	54.00	-14.13	AVG
3034.000	56.35	0.91	57.26	74.00	-16.74	peak
3034.000	42.90	0.91	43.81	54.00	-10.19	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

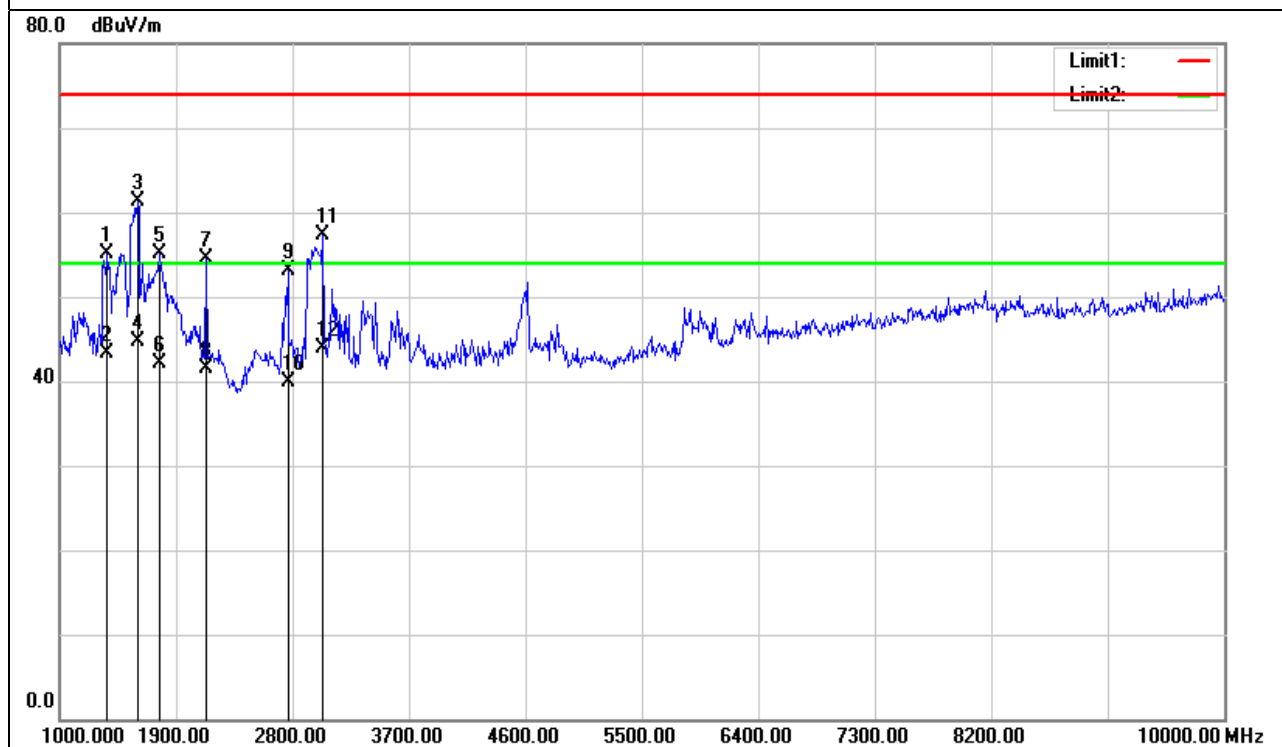


Horizontal

Detect: 10GHz -26.5GHz

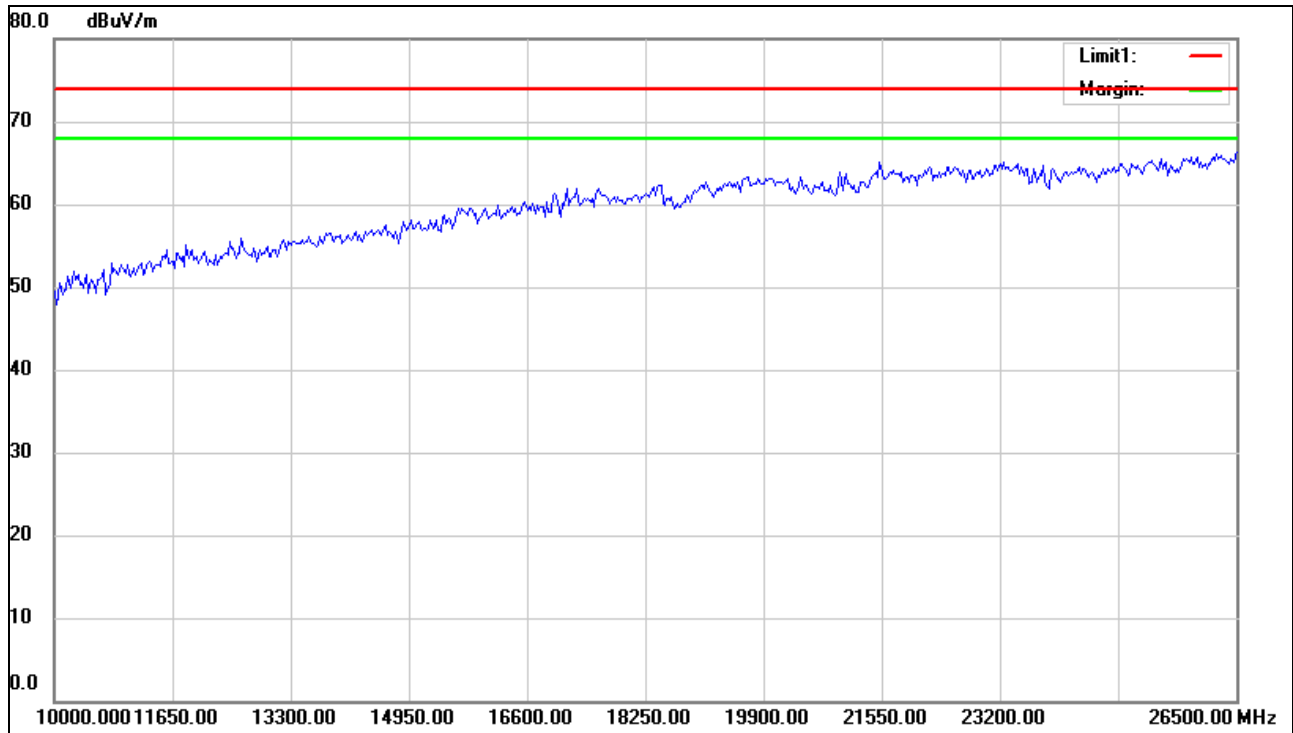

Vertical


Detect: 10GHz -26.5GHz

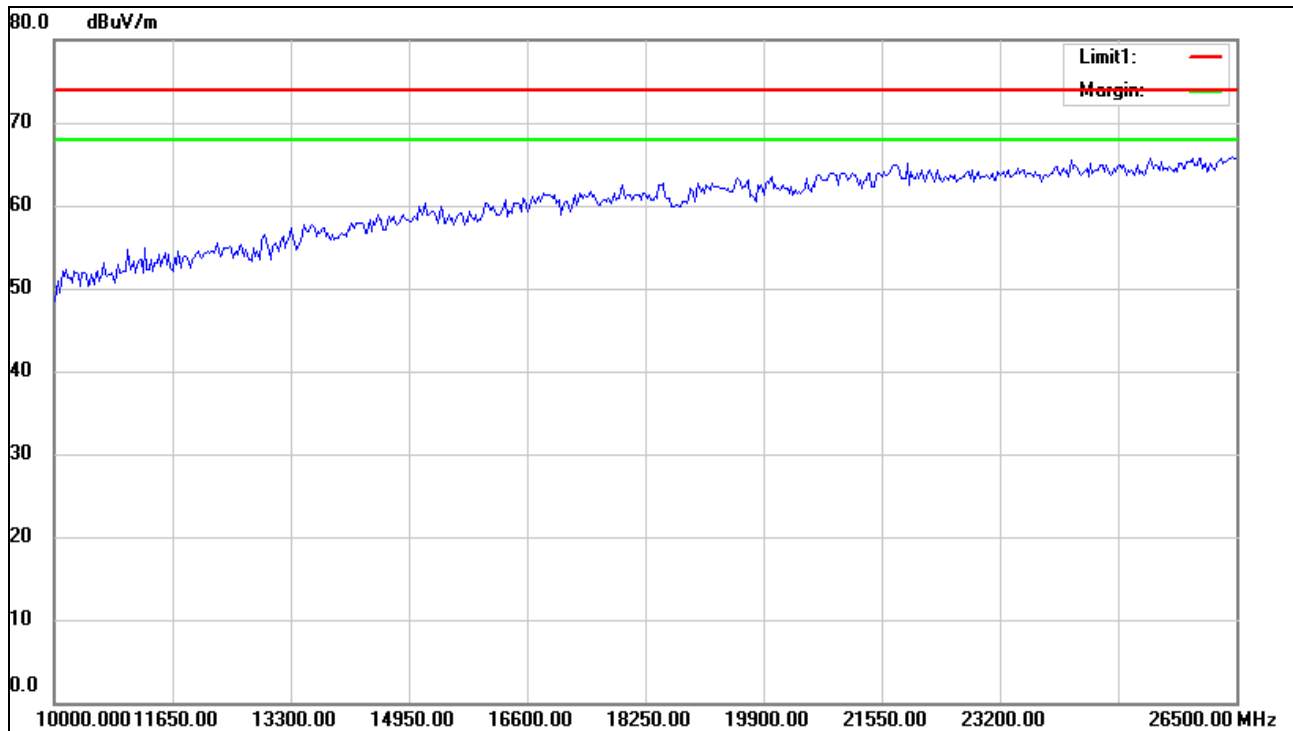

EUT :	液晶顯示器	Model Name :	LE65K6500U
Temperature :	26 °C	Relative Humidity :	60%
Pressure :	1010 hPa	Test Date :	2019-03-31
Test Mode :	TX CH06 (802.11b :Rate 1Mbps)	Polarization :	Horizontal
Measurement Distance	3 m	Frenqucy Range	1GHz to 25GHz
Test Power :	AC 110/60Hz		

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
1477.000	64.80	-5.40	59.40	74.00	-14.60	peak
1477.000	51.69	-5.40	46.29	54.00	-7.71	AVG
1576.000	62.45	-4.89	57.56	74.00	-16.44	peak
1576.000	50.68	-4.89	45.79	54.00	-8.21	AVG
2764.000	52.15	-0.10	52.05	74.00	-21.95	peak
2764.000	42.83	-0.10	42.73	54.00	-11.27	AVG
3034.000	54.43	0.91	55.34	74.00	-18.66	peak
3034.000	41.95	0.91	42.86	54.00	-11.14	AVG
5824.000	46.32	4.70	51.02	74.00	-22.98	peak
6355.000	44.34	5.80	50.14	74.00	-23.86	peak


Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

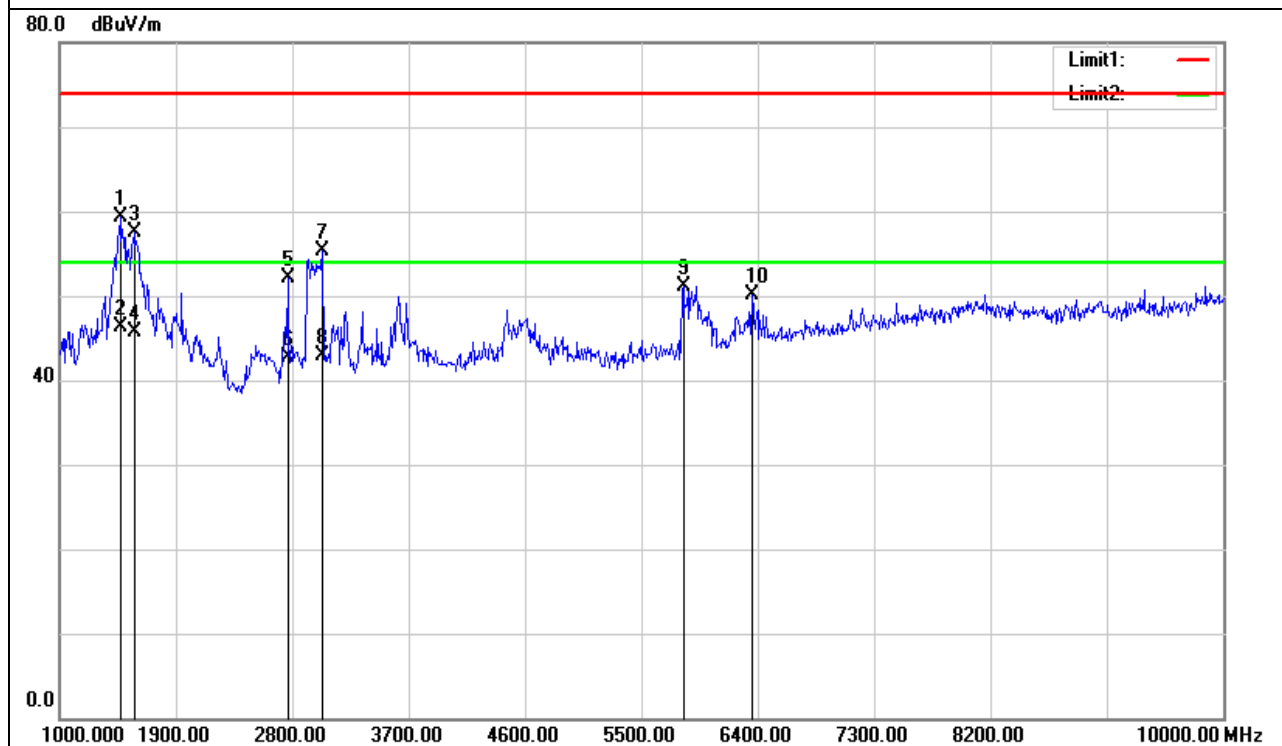

EUT :	液晶顯示器	Model Name :	LE65K6500U
Temperature :	26 °C	Relative Humidity :	60%
Pressure :	1010 hPa	Test Date :	2019-03-31
Test Mode :	TX CH06 (802.11b :Rate 1Mbps)	Polarization :	Vertical
Measurement Distance	3 m	Frenqucy Range	1GHz to 25GHz
Test Power :	AC 110/60Hz		


Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
1351.000	60.74	-5.73	55.01	74.00	-18.99	peak
1351.000	50.86	-5.73	45.13	54.00	-8.87	AVG
1603.000	66.60	-4.72	61.88	74.00	-12.12	peak
1603.000	51.09	-4.72	46.37	54.00	-7.63	AVG
2755.000	53.82	-0.15	53.67	74.00	-20.33	peak
2755.000	42.70	-0.15	42.55	54.00	-11.45	AVG
3034.000	57.45	0.91	58.36	74.00	-15.64	peak
3034.000	45.88	0.91	46.79	54.00	-7.21	AVG
4609.000	48.13	2.48	50.61	74.00	-23.39	peak
5824.000	46.86	4.70	51.56	74.00	-22.44	peak

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

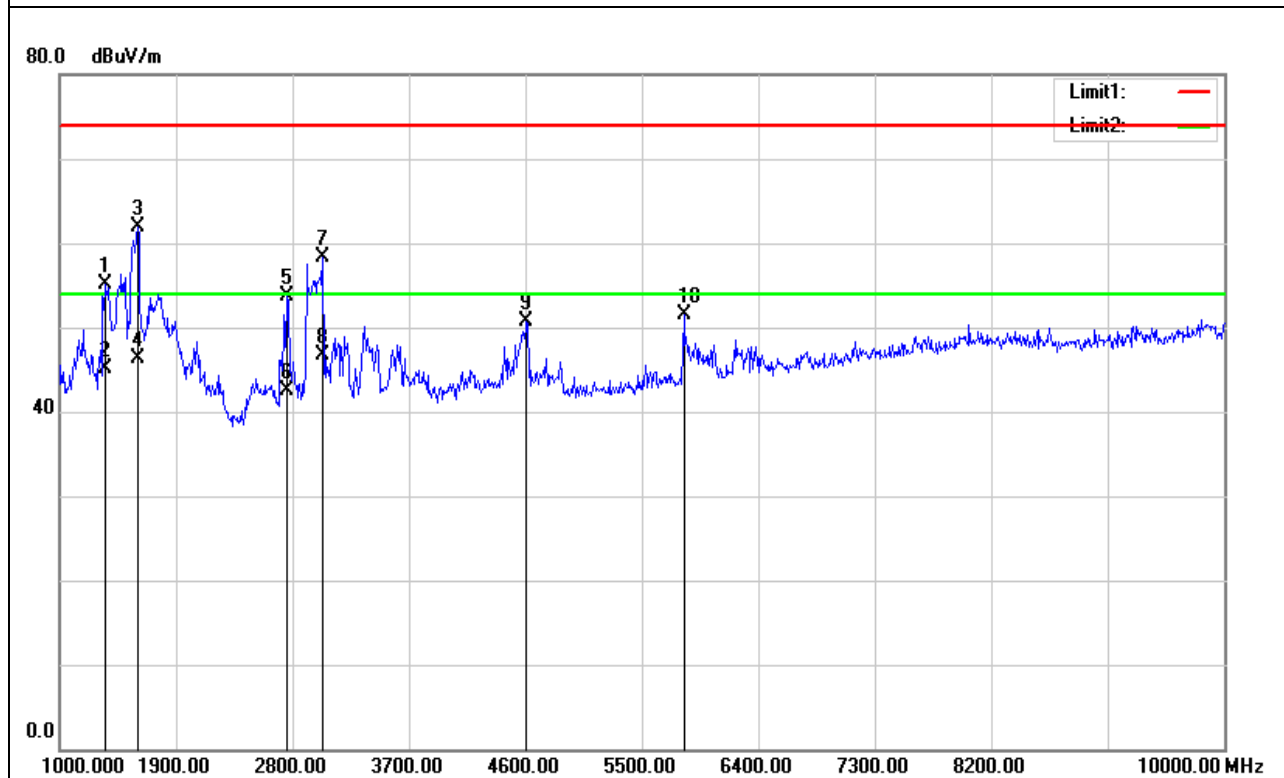


Horizontal

Detect: 10GHz -26.5GHz

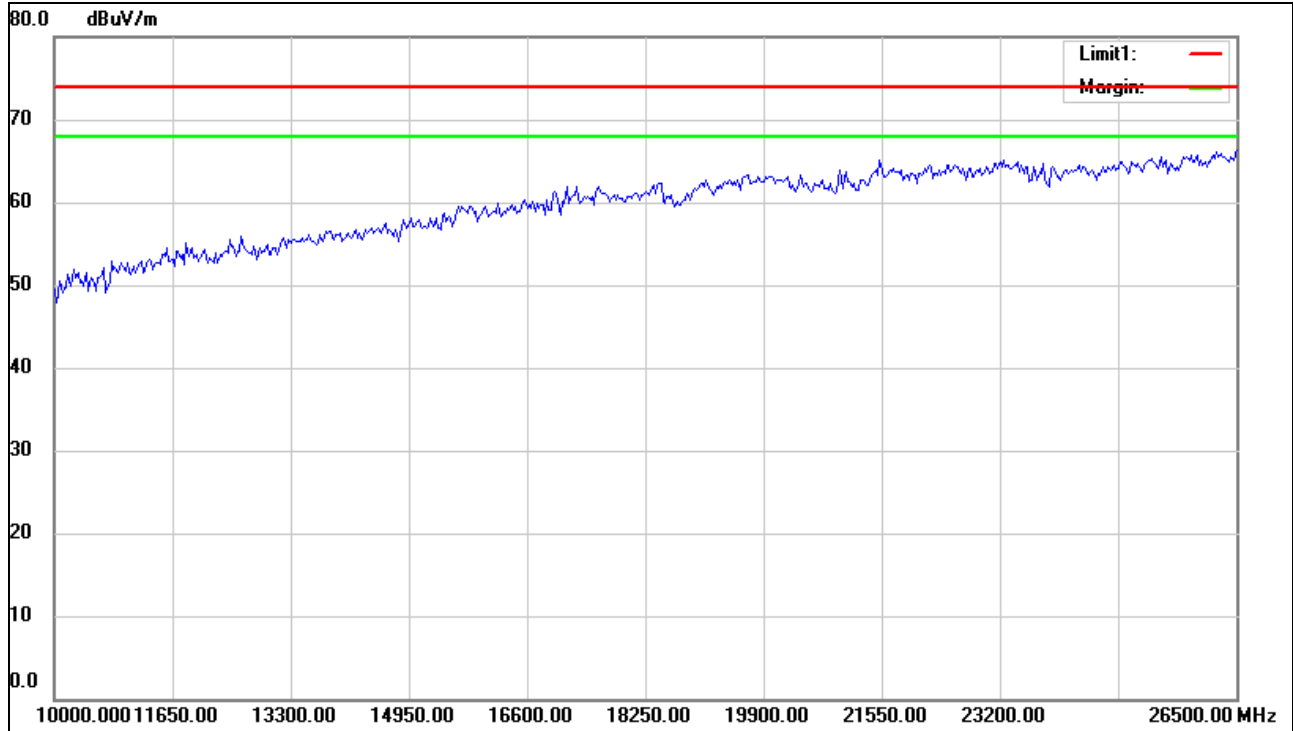

Vertical


Detect: 10GHz -26.5GHz

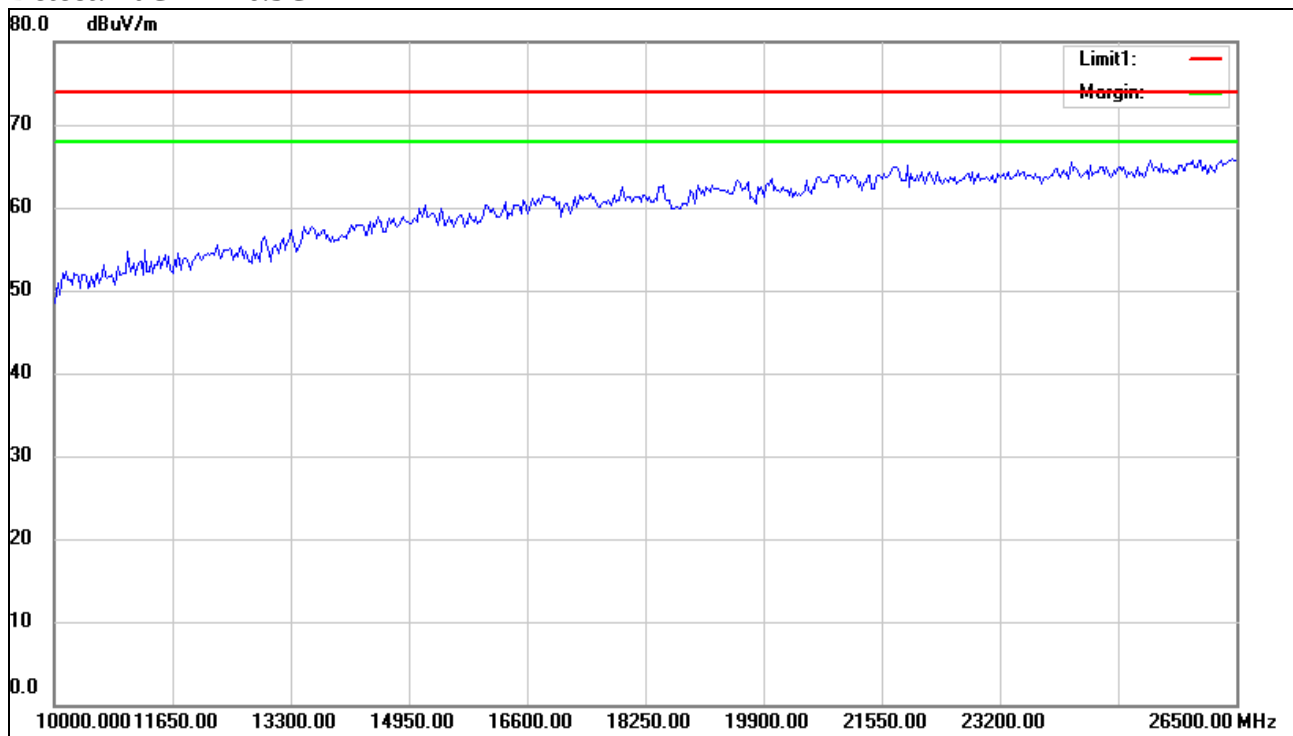

EUT :	液晶顯示器	Model Name :	LE65K6500U
Temperature :	26 °C	Relative Humidity :	60%
Pressure :	1010 hPa	Test Date :	2019-03-31
Test Mode :	TX CH11 (802.11b :Rate 1Mbps)	Polarization :	Horizontal
Measurement Distance	3 m	Frenqucy Range	1GHz to 25GHz
Test Power :	AC 110/60Hz		

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
1477.000	64.19	-5.40	58.79	74.00	-15.21	peak
1477.000	51.74	-5.40	46.34	54.00	-7.66	AVG
1603.000	61.98	-4.72	57.26	74.00	-16.74	peak
1603.000	51.00	-4.72	46.28	54.00	-7.72	AVG
2764.000	51.07	-0.10	50.97	74.00	-23.03	peak
3034.000	56.98	0.91	57.89	74.00	-16.11	peak
3034.000	42.66	0.91	43.57	54.00	-10.43	AVG
4546.000	46.94	2.52	49.46	74.00	-24.54	peak
5824.000	48.60	4.70	53.30	74.00	-20.70	peak
5824.000	36.59	4.70	41.29	54.00	-12.71	AVG


Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

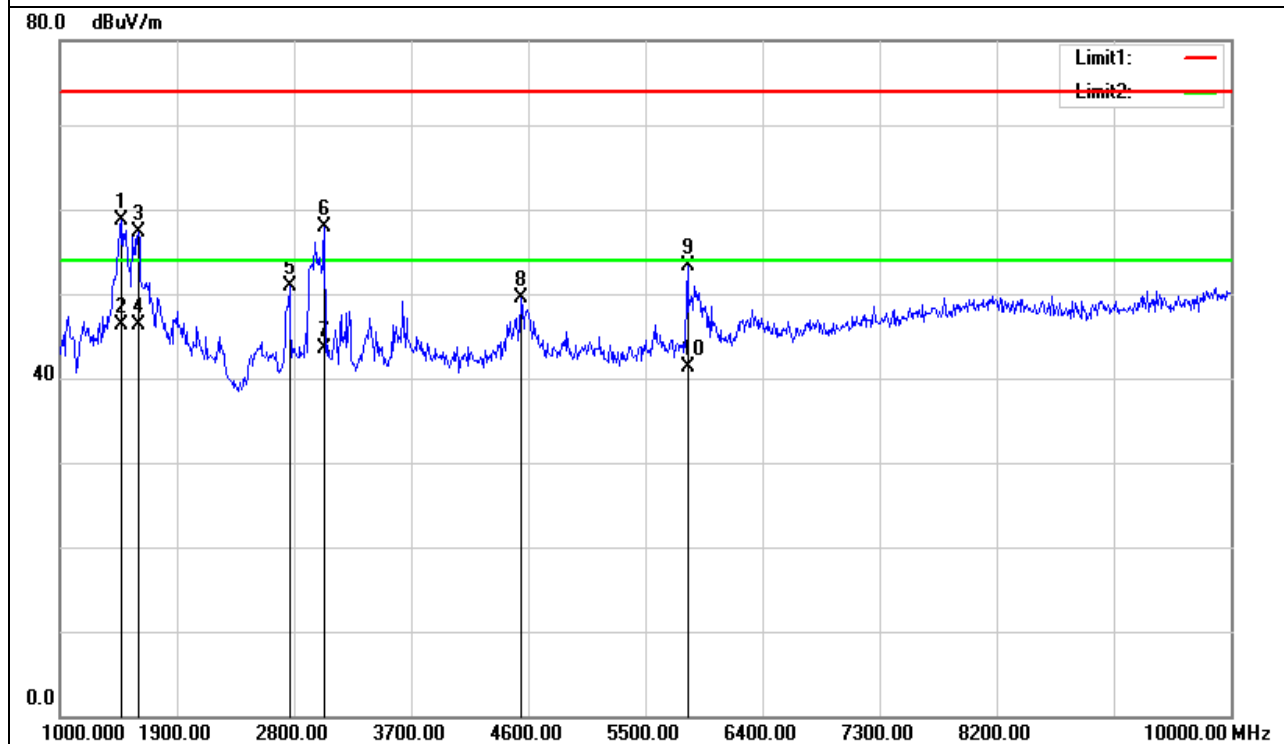

EUT :	液晶顯示器	Model Name :	LE65K6500U
Temperature :	26 °C	Relative Humidity :	60%
Pressure :	1010 hPa	Test Date :	2019-03-31
Test Mode :	TX CH11 (802.11b :Rate 1Mbps)	Polarization :	Vertical
Measurement Distance	3 m	Frenqucy Range	1GHz to 25GHz
Test Power :	AC 110/60Hz		


Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
1378.000	61.06	-5.67	55.39	74.00	-18.61	peak
1378.000	49.35	-5.67	43.68	54.00	-10.32	AVG
1603.000	67.48	-4.72	62.76	74.00	-11.24	peak
1603.000	51.74	-4.72	47.02	54.00	-6.98	AVG
2755.000	54.47	-0.15	54.32	74.00	-19.68	peak
2755.000	41.37	-0.15	41.22	54.00	-12.78	AVG
3034.000	57.56	0.91	58.47	74.00	-15.53	peak
3034.000	44.25	0.91	45.16	54.00	-8.84	AVG
4618.000	47.90	2.47	50.37	74.00	-23.63	peak
5824.000	47.53	4.70	52.23	74.00	-21.77	peak
5824.000	35.99	4.70	40.69	54.00	-13.31	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

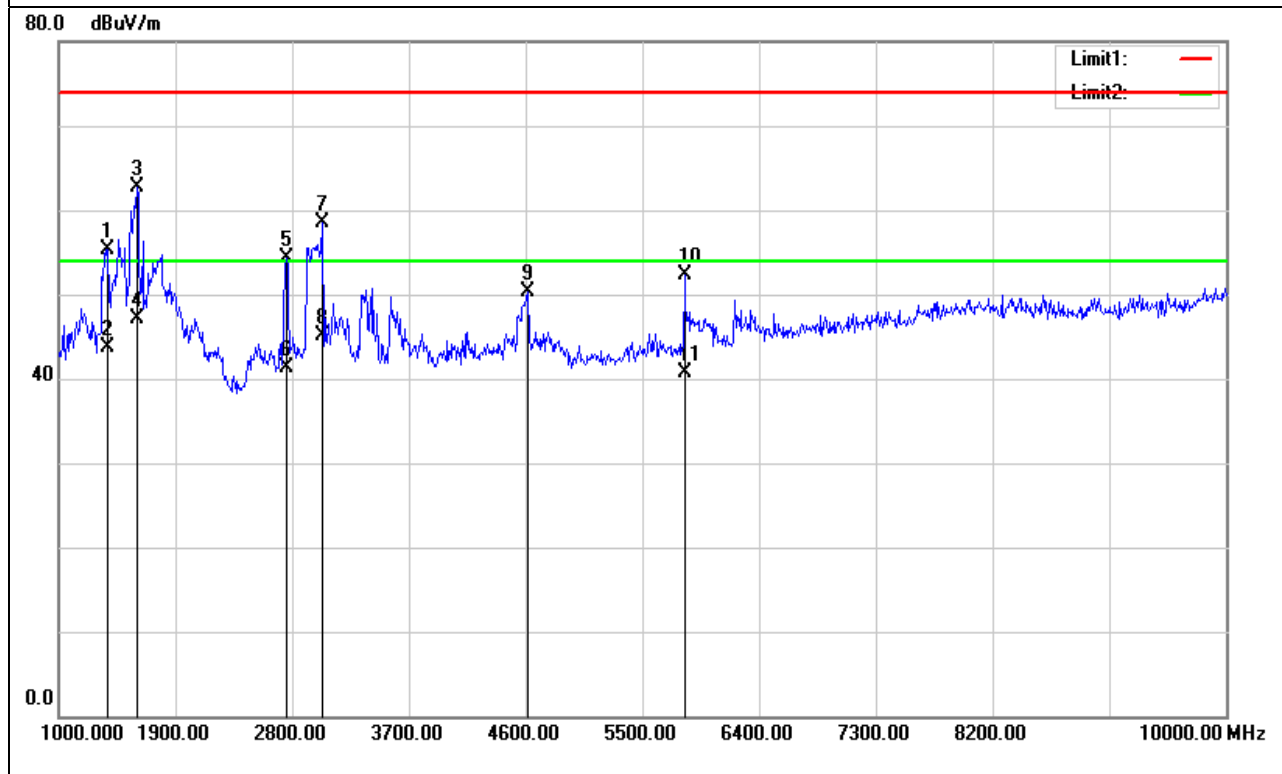


Horizontal

Detect: 10GHz -26.5GHz

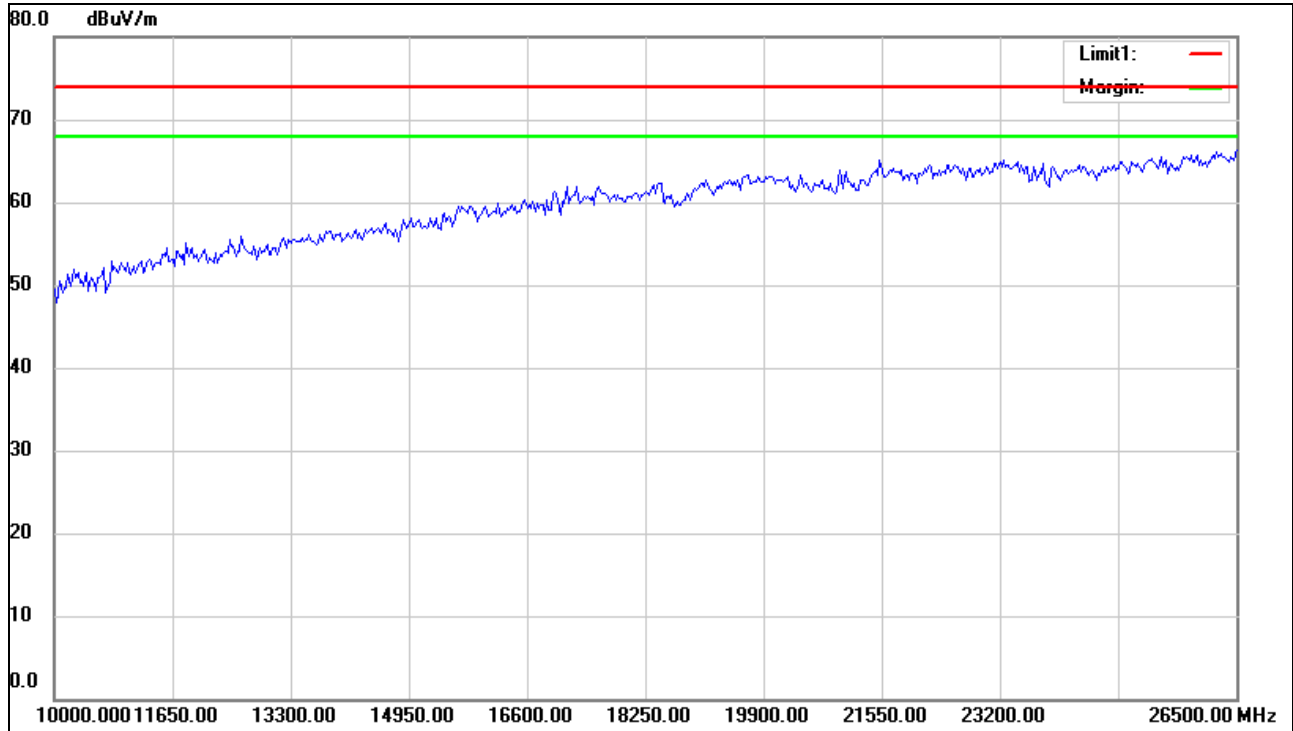

Vertical


Detect: 10GHz -26.5GHz

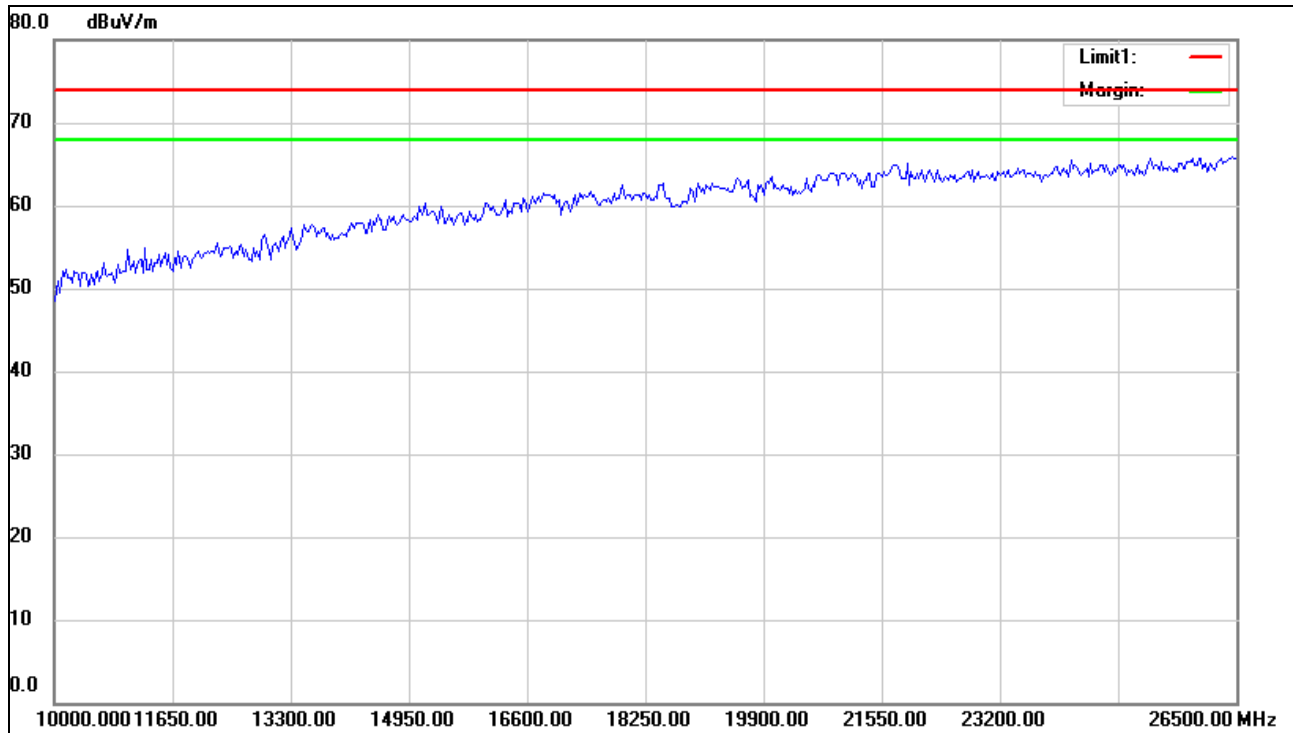

EUT：	液晶顯示器	Model Name：	LE65K6500U
Temperature：	26℃	Relative Humidity：	60%
Pressure：	1010 hPa	Test Date：	2019-03-31
Test Mode：	TX CH01 (802.11g: Rate 6Mbps)	Polarization：	Horizontal
Measurement Distance	3 m	Frenqucy Range	1GHz to 25GHz
Test Power：	AC 110/60Hz		

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
1477.000	62.79	-5.40	57.39	74.00	-16.61	peak
1477.000	48.19	-5.40	42.79	54.00	-11.21	AVG
1594.000	63.01	-4.77	58.24	74.00	-15.76	peak
1594.000	48.02	-4.77	43.25	54.00	-10.75	AVG
3034.000	54.27	0.91	55.18	74.00	-18.82	peak
3034.000	41.73	0.91	42.64	54.00	-11.36	AVG
3637.000	49.06	1.10	50.16	74.00	-23.84	peak
5824.000	46.04	4.70	50.74	74.00	-23.26	peak
6211.000	43.20	5.58	48.78	74.00	-25.22	peak


Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

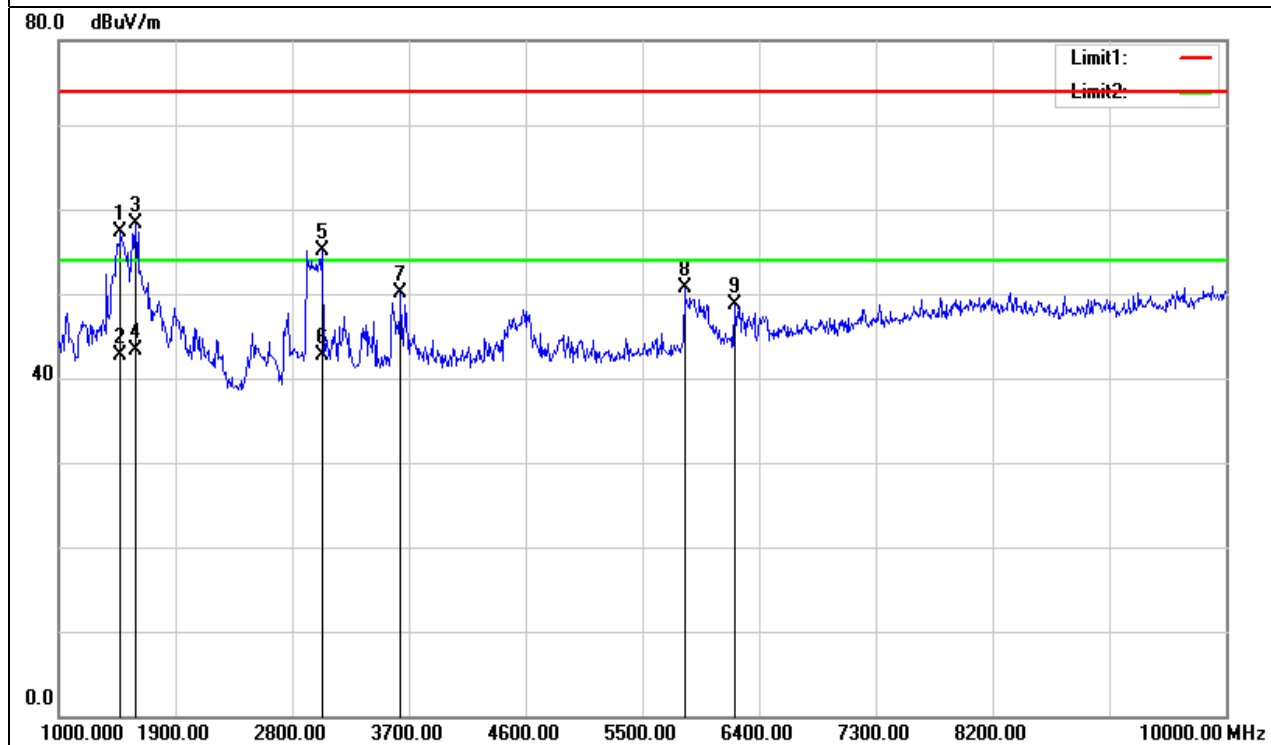

EUT :	液晶顯示器	Model Name :	LE65K6500U
Temperature :	26 °C	Relative Humidity :	60%
Pressure :	1010 hPa	Test Date :	2019-03-31
Test Mode :	TX CH01 (802.11g: Rate 6Mbps)	Polarization :	Vertical
Measurement Distance	3 m	Frenqucy Range	1GHz to 25GHz
Test Power :	AC 110/60Hz		


Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
1378.000	60.51	-5.67	54.84	74.00	-19.16	peak
1378.000	47.84	-5.67	42.17	54.00	-11.83	AVG
1477.000	61.12	-5.40	55.72	74.00	-18.28	peak
1477.000	47.78	-5.40	42.38	54.00	-11.62	AVG
1603.000	66.59	-4.72	61.87	74.00	-12.13	peak
1603.000	50.51	-4.72	45.79	54.00	-8.21	AVG
2764.000	52.37	-0.10	52.27	74.00	-21.73	peak
2764.000	40.33	-0.10	40.23	54.00	-13.77	AVG
3034.000	55.80	0.91	56.71	74.00	-17.29	peak
3034.000	42.64	0.91	43.55	54.00	-10.45	AVG
5824.000	45.57	4.70	50.27	74.00	-23.73	peak

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

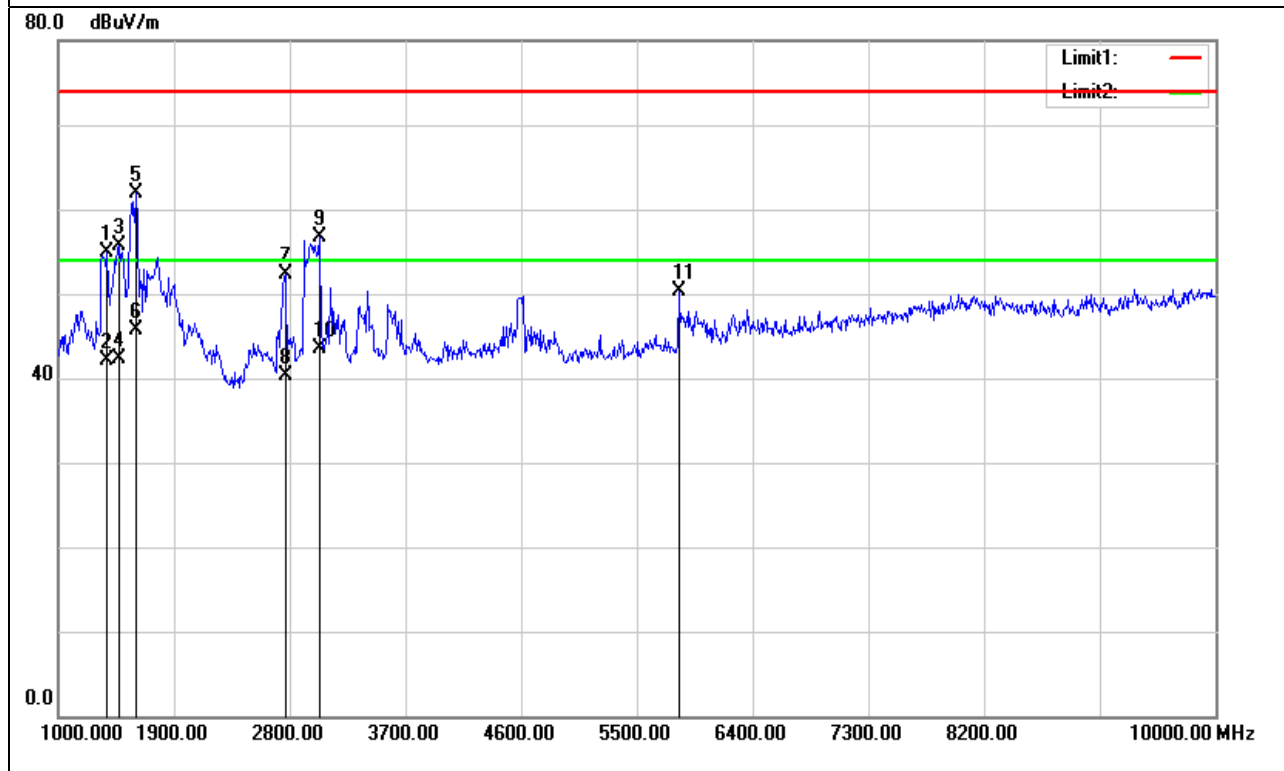


Horizontal

Detect: 10GHz -26.5GHz

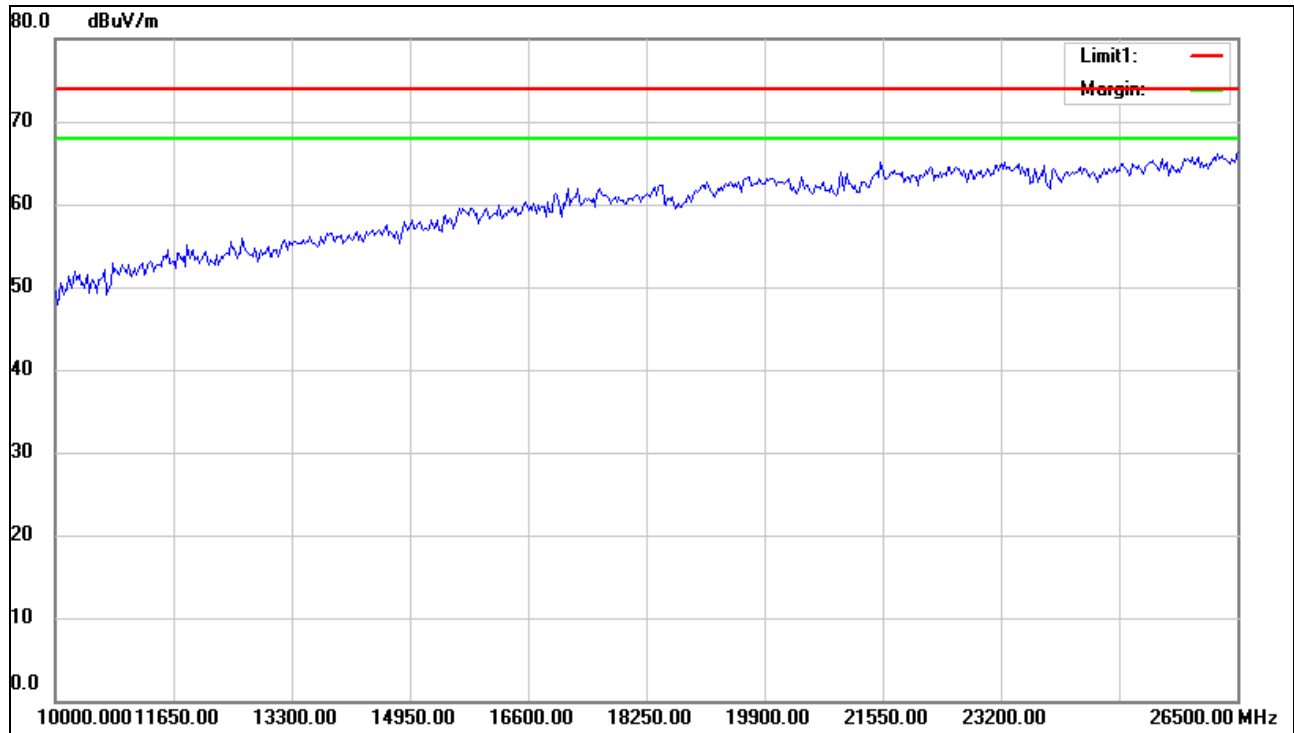

Vertical


Detect: 10GHz -26.5GHz

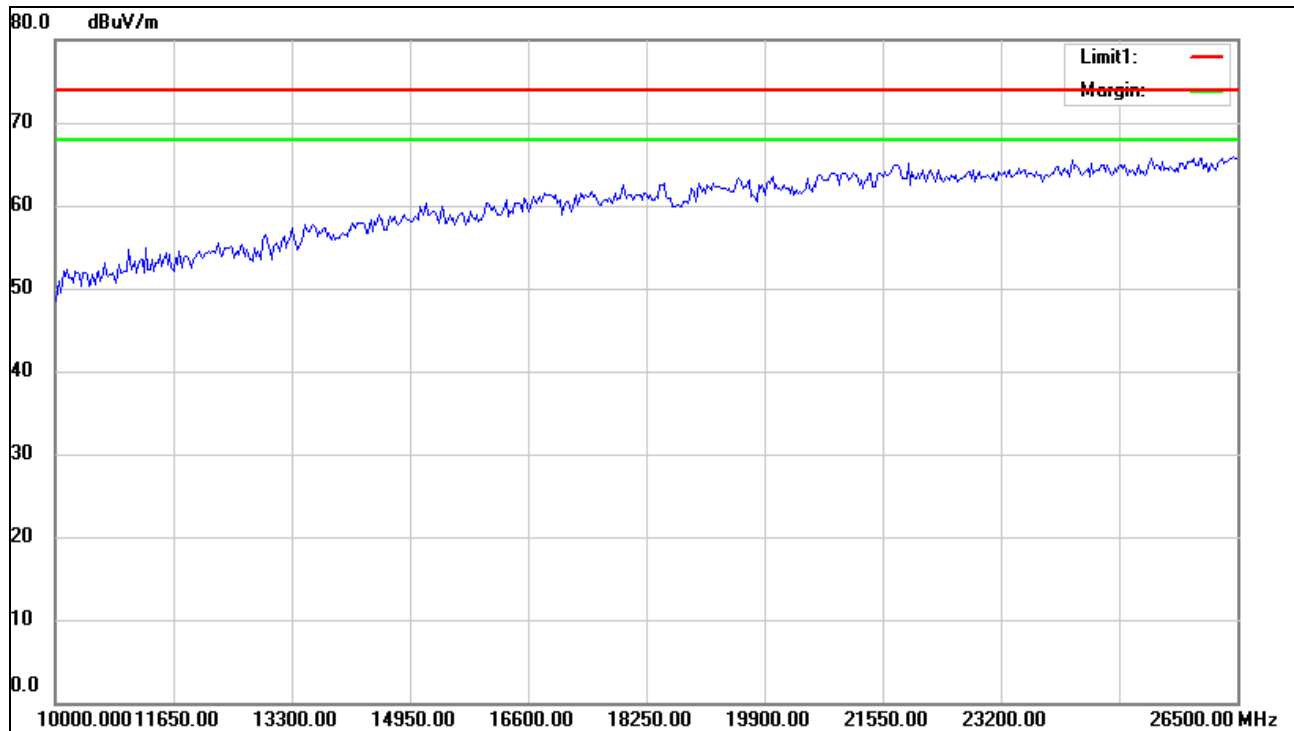

EUT :	液晶顯示器	Model Name :	LE65K6500U
Temperature :	26 °C	Relative Humidity :	60%
Pressure :	1010 hPa	Test Date :	2019-03-31
Test Mode :	TX CH06 (802.11g: Rate 6Mbps)	Polarization :	Horizontal
Measurement Distance	3 m	Frenqucy Range	1GHz to 25GHz
Test Power :	AC 110/60Hz		

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
1477.000	64.76	-5.40	59.36	74.00	-14.64	peak
1477.000	49.57	-5.40	44.17	54.00	-9.83	AVG
1612.000	62.69	-4.67	58.02	74.00	-15.98	peak
1612.000	48.26	-4.67	43.59	54.00	-10.41	AVG
2755.000	51.14	-0.15	50.99	74.00	-23.01	peak
3025.000	53.24	0.92	54.16	74.00	-19.84	peak
3025.000	41.44	0.92	42.36	54.00	-11.64	AVG
4618.000	47.93	2.47	50.40	74.00	-23.60	peak
5824.000	47.69	4.70	52.39	74.00	-21.61	peak
5824.000	35.58	4.70	40.28	54.00	-13.72	AVG


Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

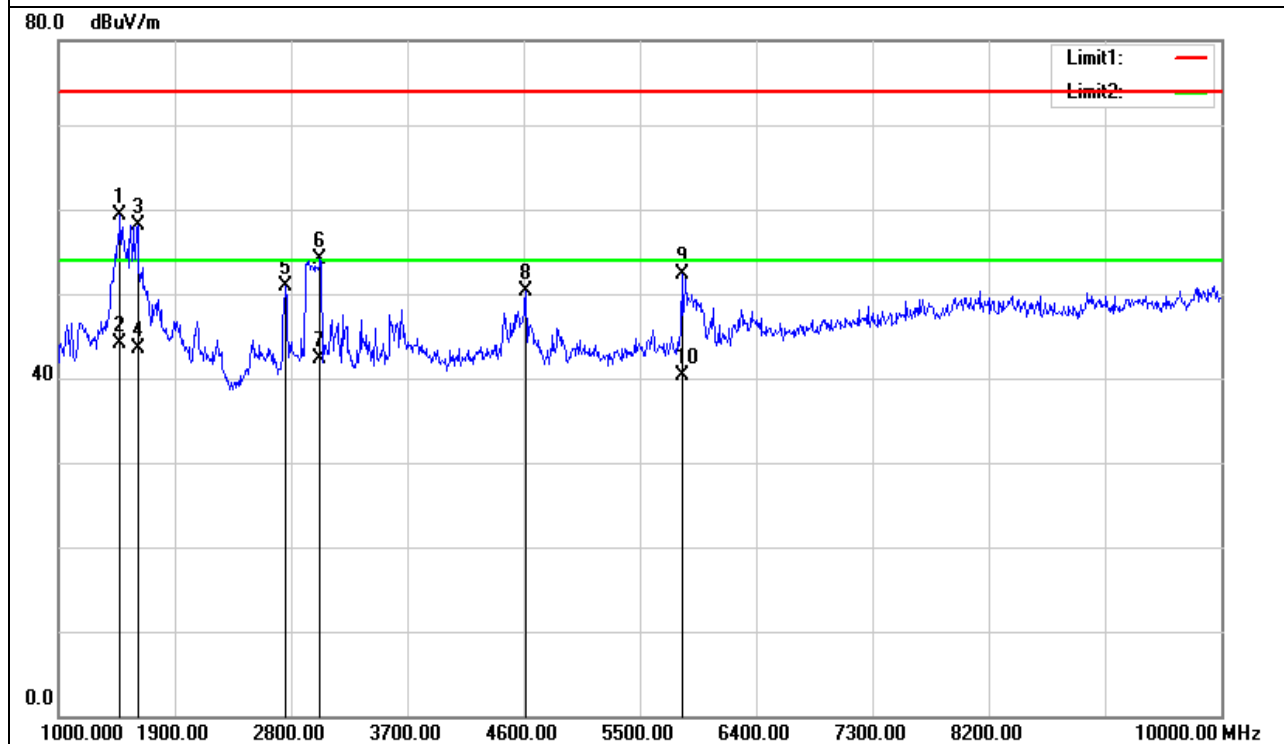

EUT :	液晶顯示器	Model Name :	LE65K6500U
Temperature :	26 °C	Relative Humidity :	60%
Pressure :	1010 hPa	Test Date :	2019-03-31
Test Mode :	TX CH06 (802.11g; Rate 6Mbps)	Polarization :	Vertical
Measurement Distance	3 m	Frenqucy Range	1GHz to 25GHz
Test Power :	AC 110/60Hz		


Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
1207.000	61.77	-6.11	55.66	74.00	-18.34	peak
1207.000	48.78	-6.11	42.67	54.00	-11.33	AVG
1459.000	61.86	-5.45	56.41	74.00	-17.59	peak
1459.000	48.71	-5.45	43.26	54.00	-10.74	AVG
1603.000	66.52	-4.72	61.80	74.00	-12.20	peak
1603.000	50.10	-4.72	45.38	54.00	-8.62	AVG
1774.000	58.33	-3.70	54.63	74.00	-19.37	peak
1774.000	45.84	-3.70	42.14	54.00	-11.86	AVG
3034.000	56.07	0.91	56.98	74.00	-17.02	peak
3034.000	42.31	0.91	43.22	54.00	-10.78	AVG
4618.000	50.01	2.47	52.48	74.00	-21.52	peak
4618.000	38.06	2.47	40.53	54.00	-13.47	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

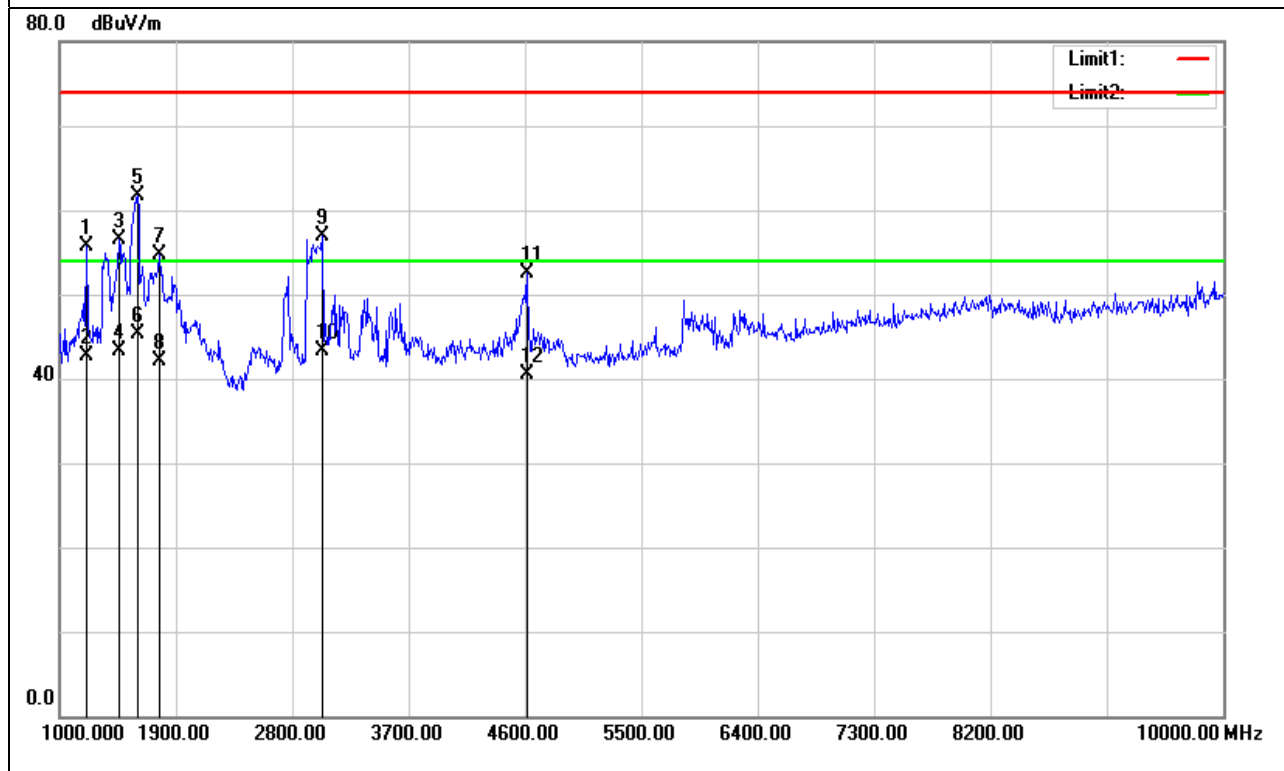


Horizontal

Detect: 10GHz -26.5GHz

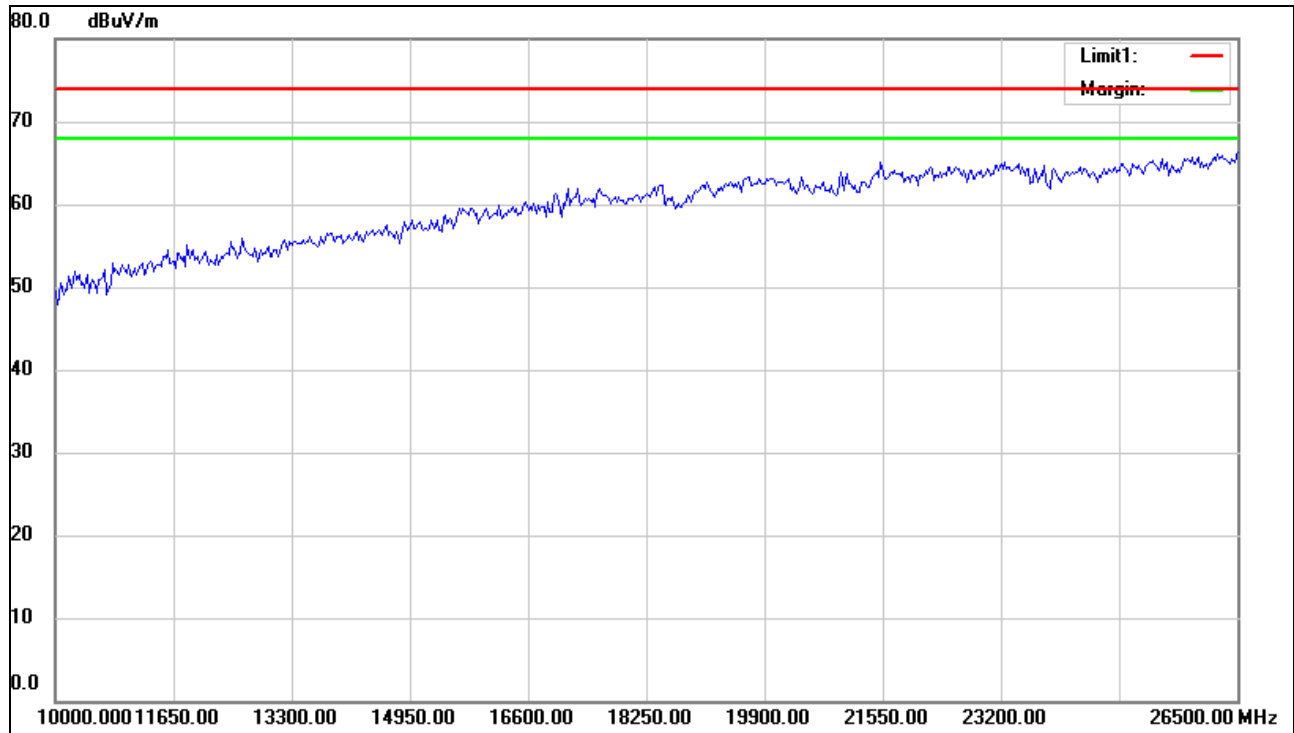

Vertical


Detect: 10GHz -26.5GHz

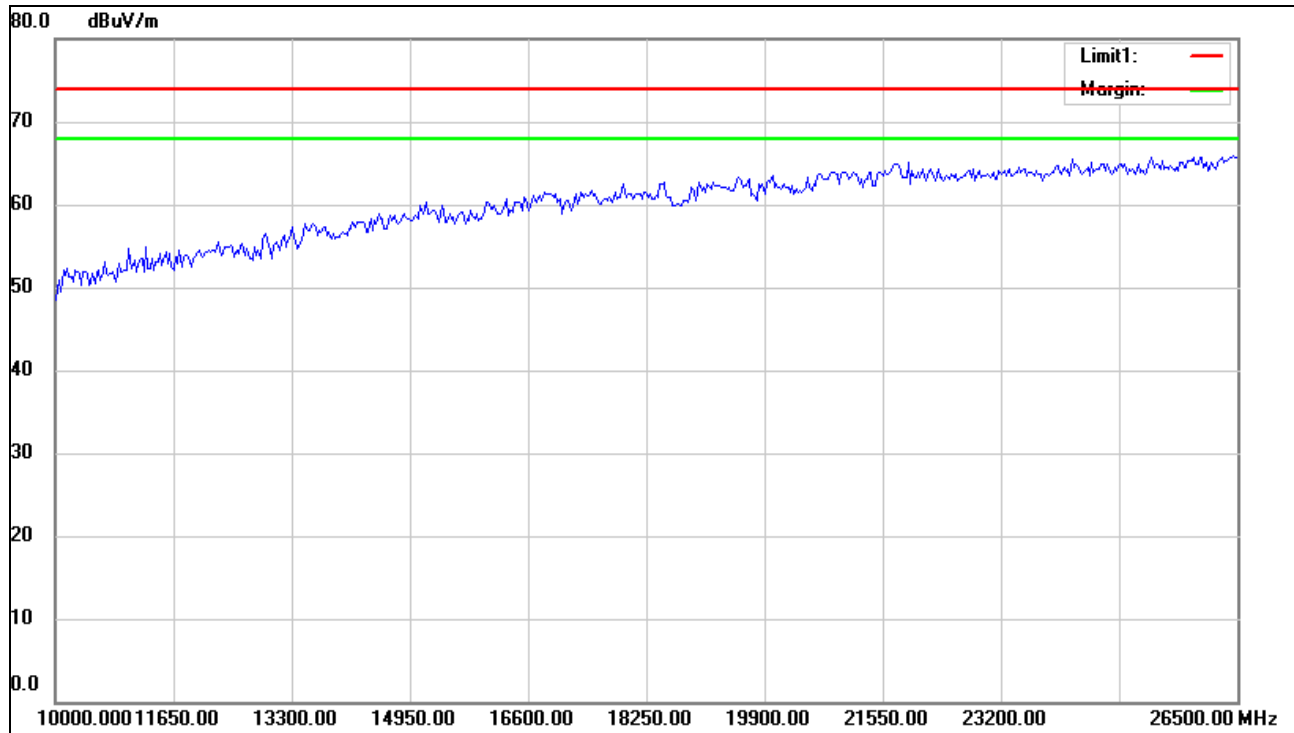

EUT :	液晶顯示器	Model Name :	LE65K6500U
Temperature :	26 °C	Relative Humidity :	60%
Pressure :	1010 hPa	Test Date :	2019-03-31
Test Mode :	TX CH11 (802.11g: Rate 6Mbps)	Polarization :	Horizontal
Measurement Distance	3 m	Frenqucy Range	1GHz to 25GHz
Test Power :	AC 110/60Hz		

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
1495.000	63.93	-5.35	58.58	74.00	-15.42	peak
1495.000	49.94	-5.35	44.59	54.00	-9.41	AVG
1612.000	62.71	-4.67	58.04	74.00	-15.96	peak
1612.000	48.41	-4.67	43.74	54.00	-10.26	AVG
2764.000	52.05	-0.10	51.95	74.00	-22.05	peak
3034.000	56.79	0.91	57.70	74.00	-16.30	peak
3034.000	42.72	0.91	43.63	54.00	-10.37	AVG
5824.000	47.42	4.70	52.12	74.00	-21.88	peak
5824.000	39.91	4.70	44.61	54.00	-9.39	AVG
8065.000	41.48	9.15	50.63	74.00	-23.37	peak


Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

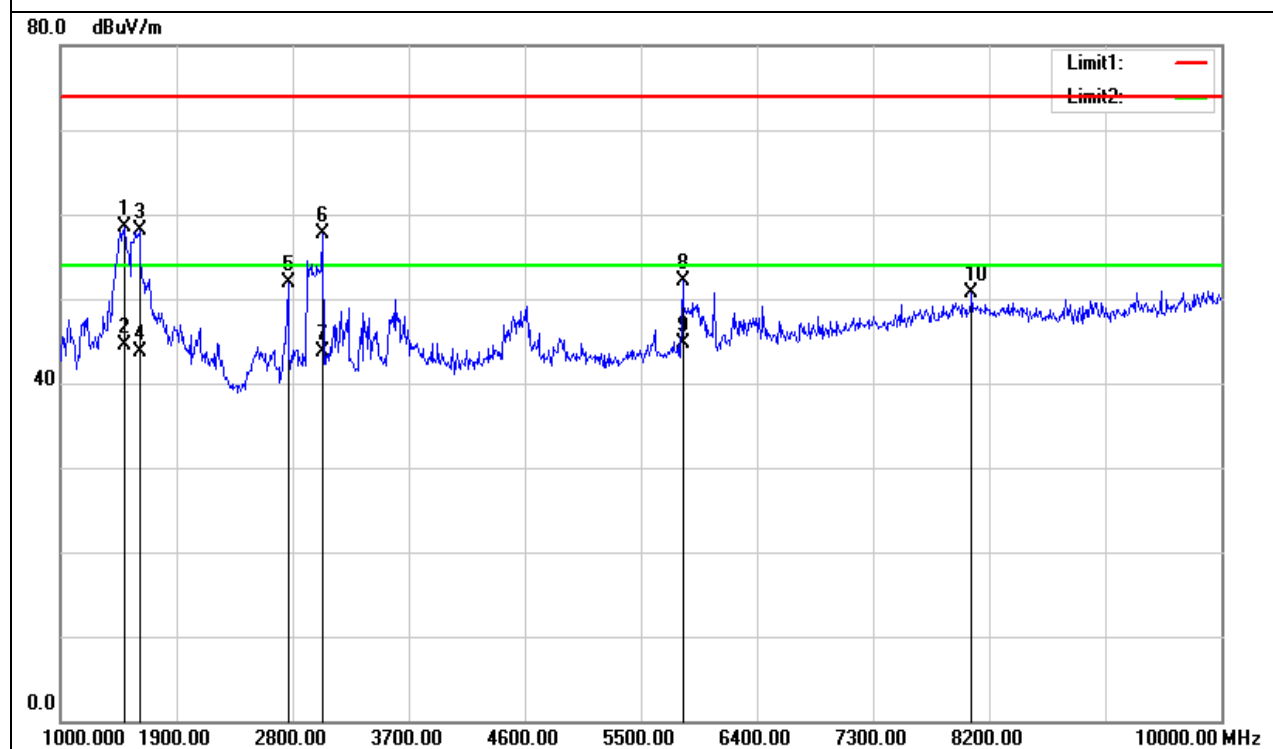

EUT :	液晶顯示器	Model Name :	LE65K6500U
Temperature :	26 °C	Relative Humidity :	60%
Pressure :	1010 hPa	Test Date :	2019-03-31
Test Mode :	TX CH11 (802.11g: Rate 6Mbps)	Polarization :	Vertical
Measurement Distance	3 m	Frenqucy Range	1GHz to 25GHz
Test Power :	AC 110/60Hz		


Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
1369.000	62.11	-5.68	56.43	74.00	-17.57	peak
1369.000	47.93	-5.68	42.25	54.00	-11.75	AVG
1459.000	62.80	-5.45	57.35	74.00	-16.65	peak
1459.000	48.61	-5.45	43.16	54.00	-10.84	AVG
1585.000	66.22	-4.84	61.38	74.00	-12.62	peak
1585.000	48.46	-4.84	43.62	54.00	-10.38	AVG
2746.000	52.45	-0.18	52.27	74.00	-21.73	peak
2746.000	40.47	-0.18	40.29	54.00	-13.71	AVG
3034.000	56.45	0.91	57.36	74.00	-16.64	peak
3034.000	41.95	0.91	42.86	54.00	-11.14	AVG
5824.000	48.00	4.70	52.70	74.00	-21.30	peak
5824.000	36.67	4.70	41.37	54.00	-12.63	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

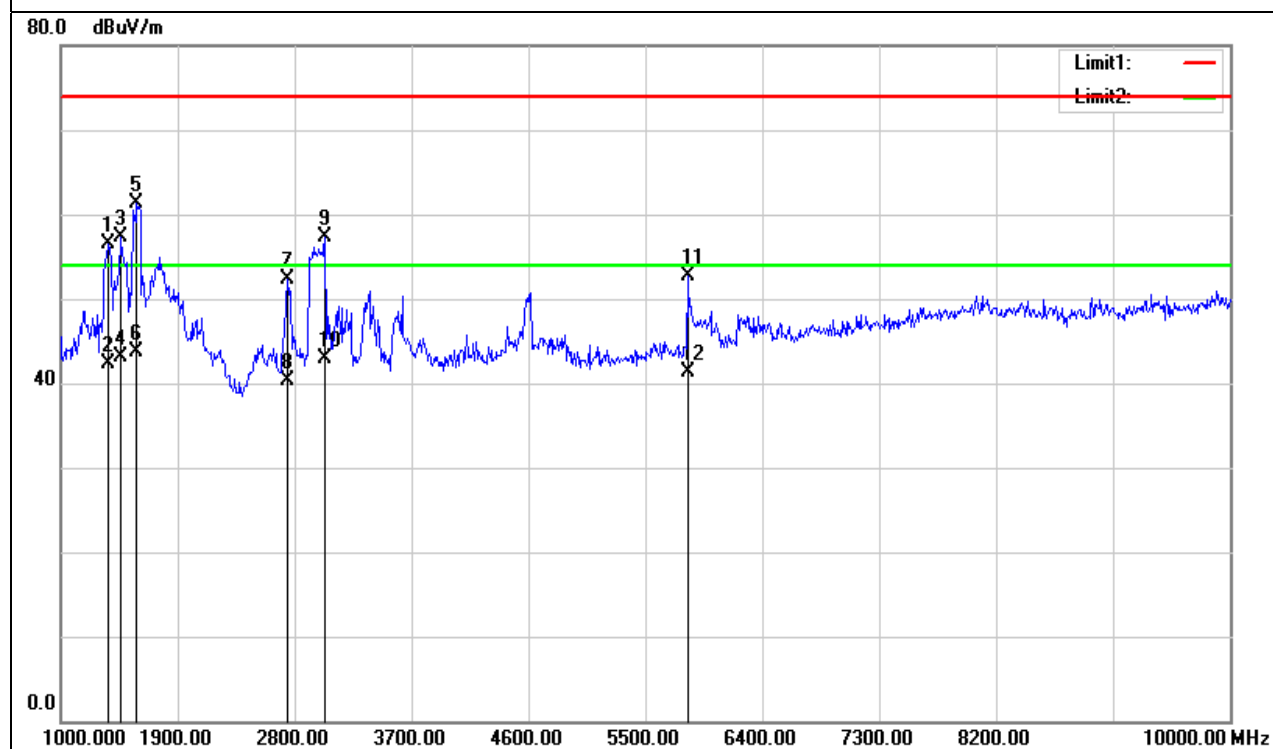


Horizontal

Detect: 10GHz -26.5GHz

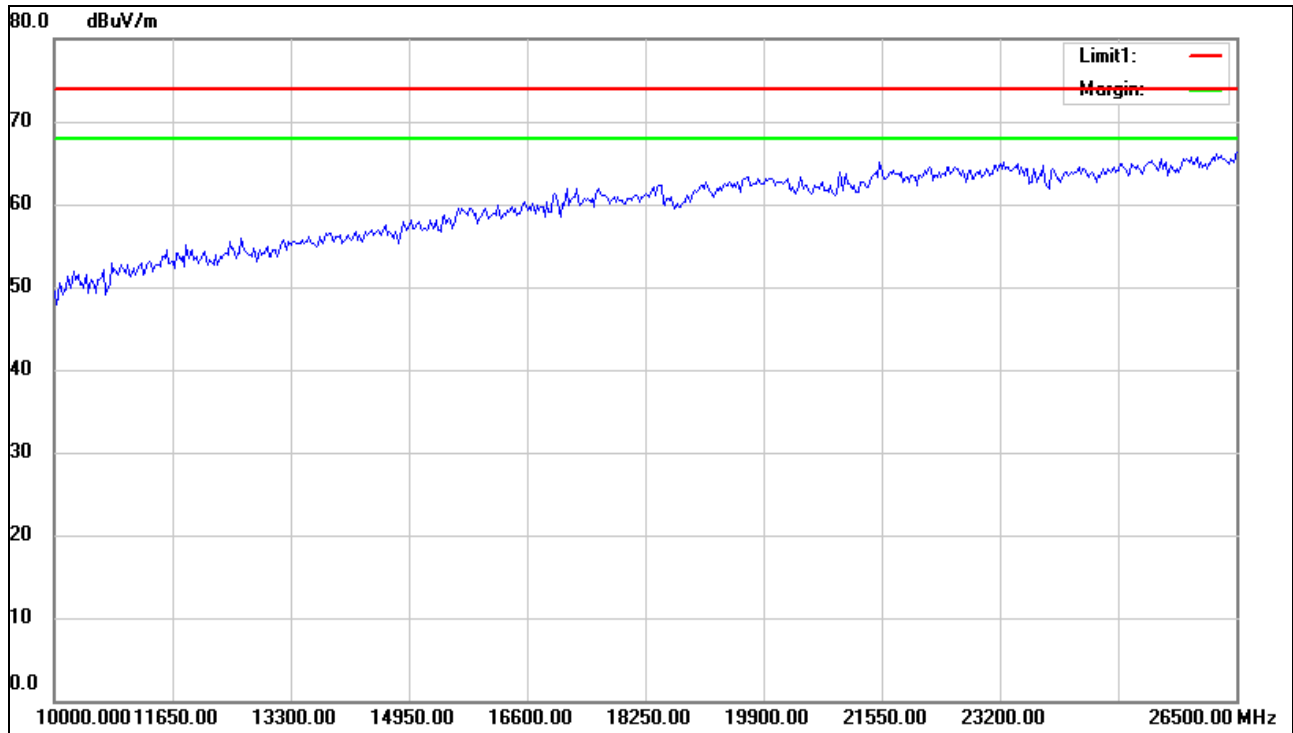

Vertical


Detect: 10GHz -26.5GHz

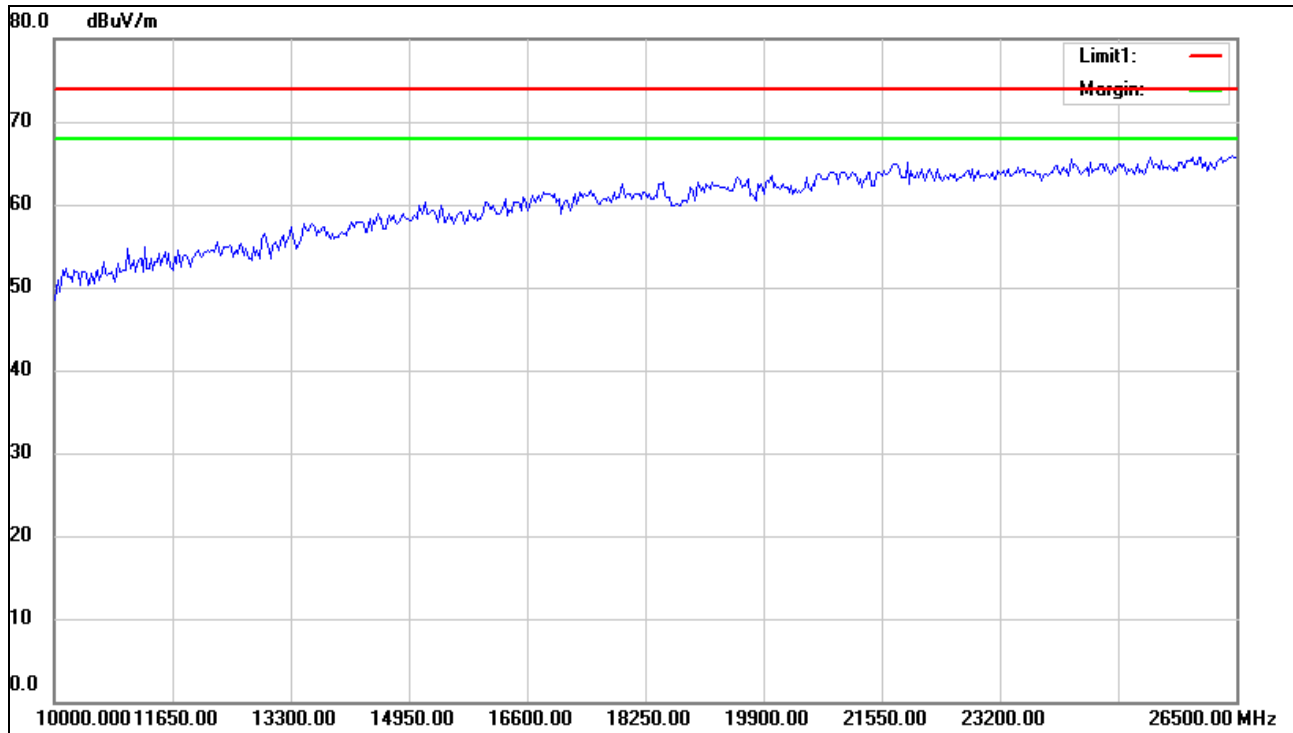

EUT :	液晶顯示器	Model Name :	LE65K6500U
Temperature :	26 °C	Relative Humidity :	60%
Pressure :	1010 hPa	Test Date :	2019-03-31
Test Mode :	TX CH01 (802.11n20 : Rate 6.5Mbps)	Polarization :	Horizontal
Measurement Distance	3 m	Frenqucy Range	1GHz to 25GHz
Test Power :	AC 110/60Hz		

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
1495.000	63.26	-5.35	57.91	74.00	-16.09	peak
1495.000	48.72	-5.35	43.37	54.00	-10.63	AVG
1585.000	62.12	-4.84	57.28	74.00	-16.72	peak
1585.000	48.10	-4.84	43.26	54.00	-10.74	AVG
3034.000	56.74	0.91	57.65	74.00	-16.35	peak
3034.000	42.06	0.91	42.97	54.00	-11.03	AVG
3628.000	49.42	1.09	50.51	74.00	-23.49	peak
5824.000	48.65	4.70	53.35	74.00	-20.65	peak
5824.000	35.68	4.70	40.38	54.00	-13.62	AVG
7660.000	41.14	8.58	49.72	74.00	-24.28	peak


Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

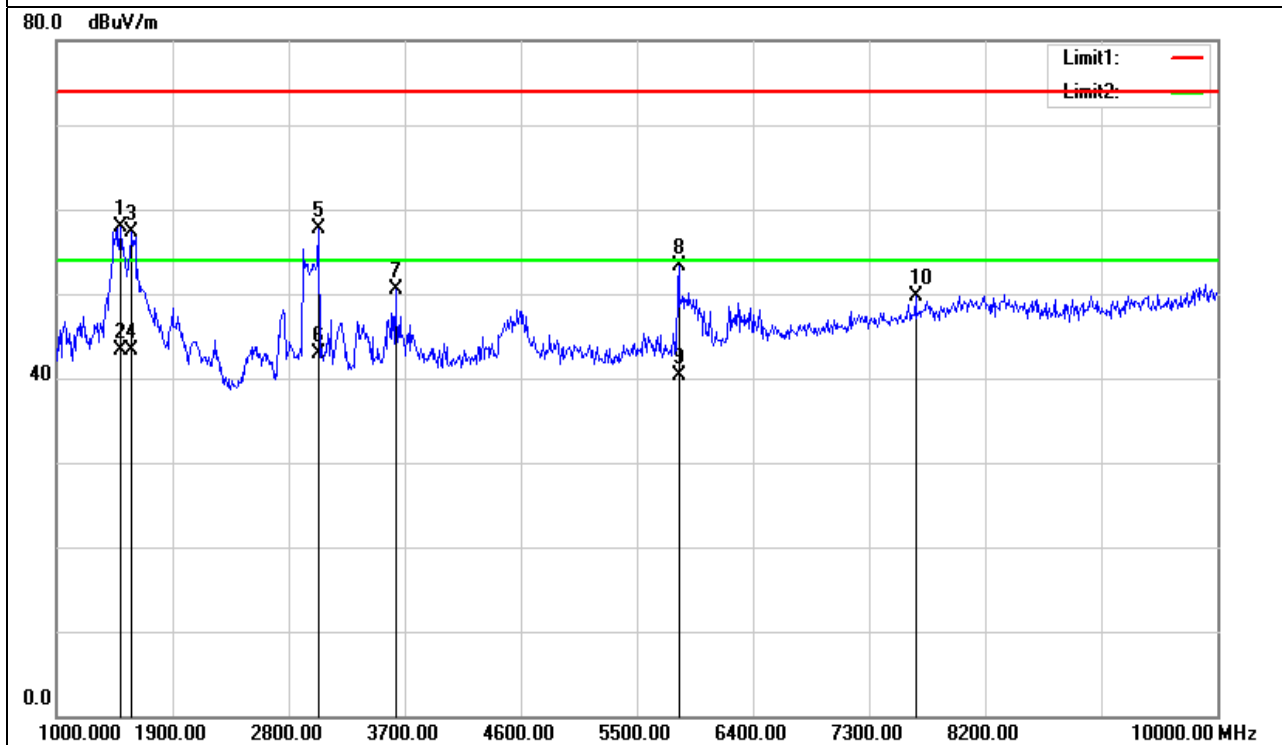

EUT :	液晶顯示器	Model Name :	LE65K6500U
Temperature :	26 °C	Relative Humidity :	60%
Pressure :	1010 hPa	Test Date :	2019-03-31
Test Mode :	TX CH01 (802.11n20 : Rate 6.5Mbps)	Polarization :	Vertical
Measurement Distance	3 m	Frenqucy Range	1GHz to 25GHz
Test Power :	AC 110/60Hz		


Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
1360.000	60.99	-5.71	55.28	74.00	-18.72	peak
1360.000	47.08	-5.71	41.37	54.00	-12.63	AVG
1459.000	61.38	-5.45	55.93	74.00	-18.07	peak
1459.000	48.04	-5.45	42.59	54.00	-11.41	AVG
1603.000	66.18	-4.72	61.46	74.00	-12.54	peak
1603.000	50.05	-4.72	45.33	54.00	-8.67	AVG
1783.000	58.27	-3.65	54.62	74.00	-19.38	peak
1783.000	44.91	-3.65	41.26	54.00	-12.74	AVG
3034.000	58.69	0.91	59.60	74.00	-14.40	peak
3034.000	40.36	0.91	41.27	54.00	-12.73	AVG
5824.000	46.34	4.70	51.04	74.00	-22.96	peak

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

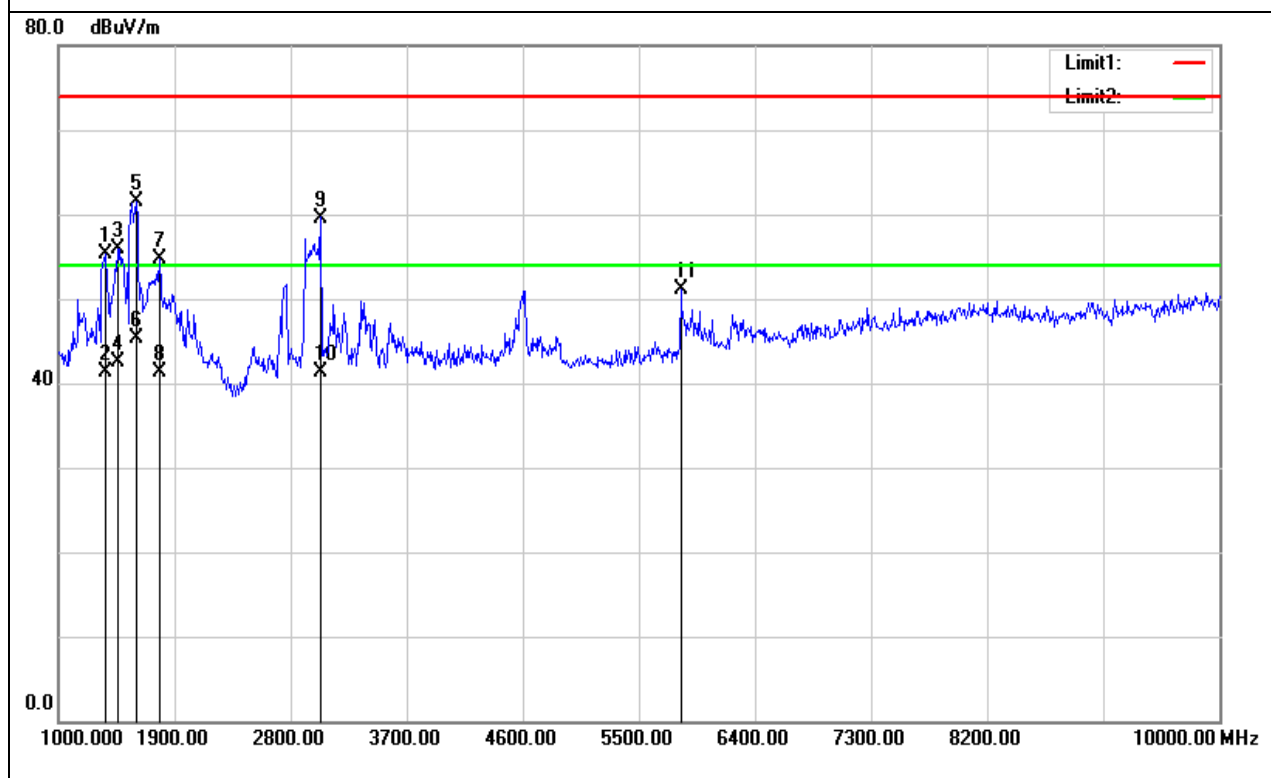


Horizontal

Detect: 10GHz -26.5GHz

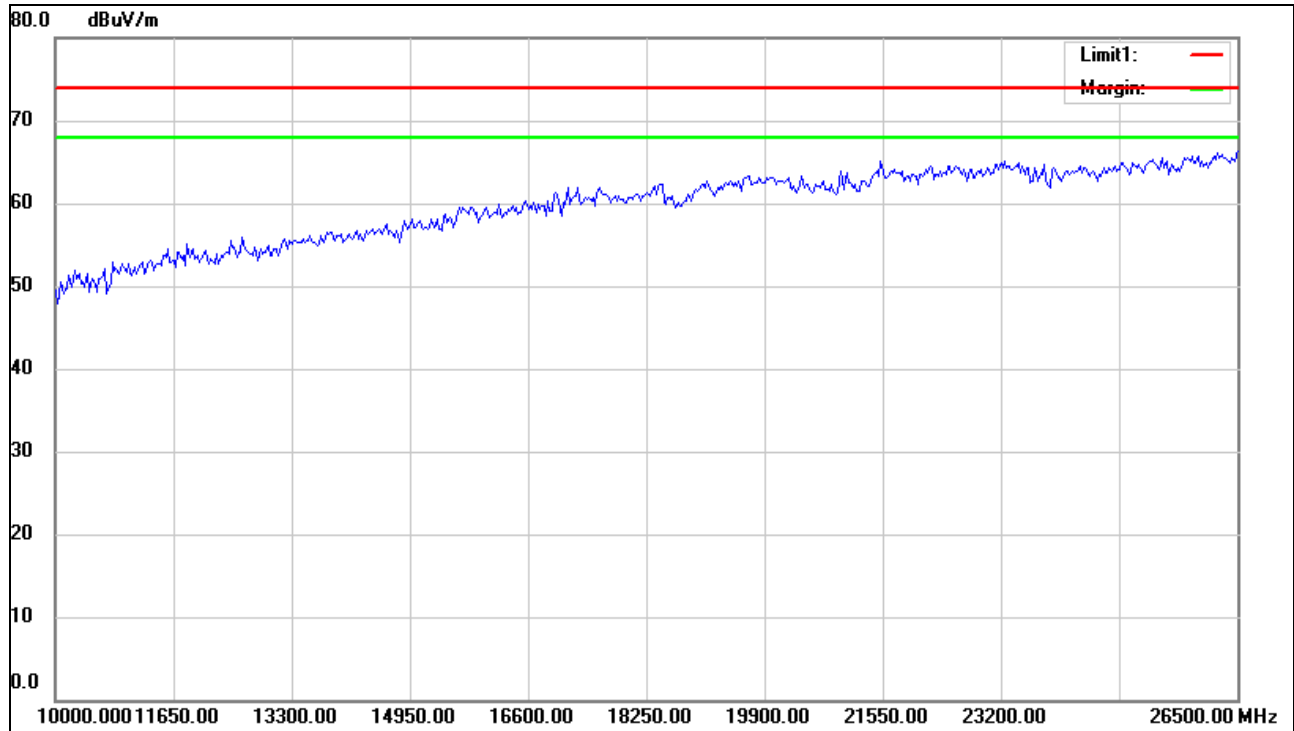

Vertical


Detect: 10GHz -26.5GHz

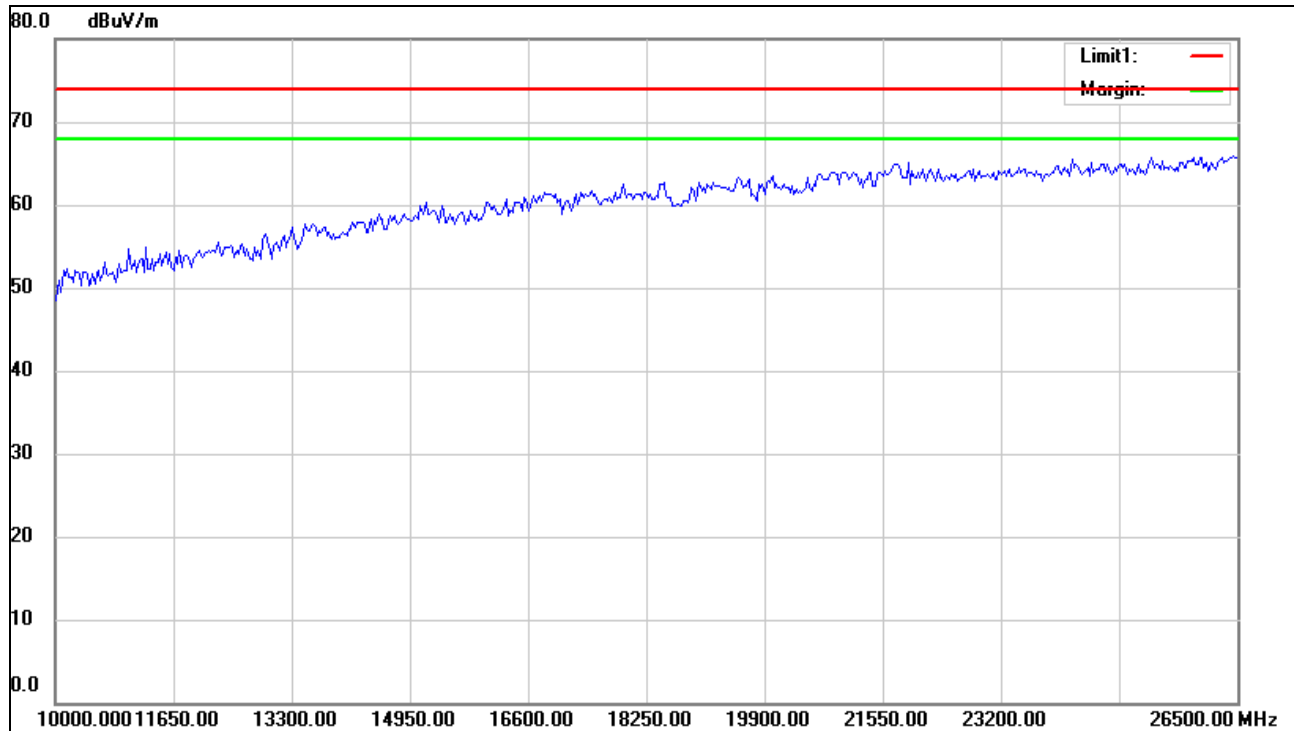

EUT :	液晶顯示器	Model Name :	LE65K6500U
Temperature :	26 °C	Relative Humidity :	60%
Pressure :	1010 hPa	Test Date :	2019-03-31
Test Mode :	TX CH06 (802.11n20 : Rate 6.5Mbps)	Polarization :	Horizontal
Measurement Distance	3 m	Frenqucy Range	1GHz to 25GHz
Test Power :	AC 110/60Hz		

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
1477.000	65.14	-5.40	59.74	74.00	-14.26	peak
1477.000	50.53	-5.40	45.13	54.00	-8.87	AVG
1603.000	63.05	-4.72	58.33	74.00	-15.67	peak
1603.000	49.11	-4.72	44.39	54.00	-9.61	AVG
2764.000	49.37	-0.10	49.27	74.00	-24.73	peak
3034.000	56.56	0.91	57.47	74.00	-16.53	peak
3034.000	41.35	0.91	42.26	54.00	-11.74	AVG
5824.000	48.45	4.70	53.15	74.00	-20.85	peak
5824.000	35.66	4.70	40.36	54.00	-13.64	AVG
8173.000	41.12	9.09	50.21	74.00	-23.79	peak


Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

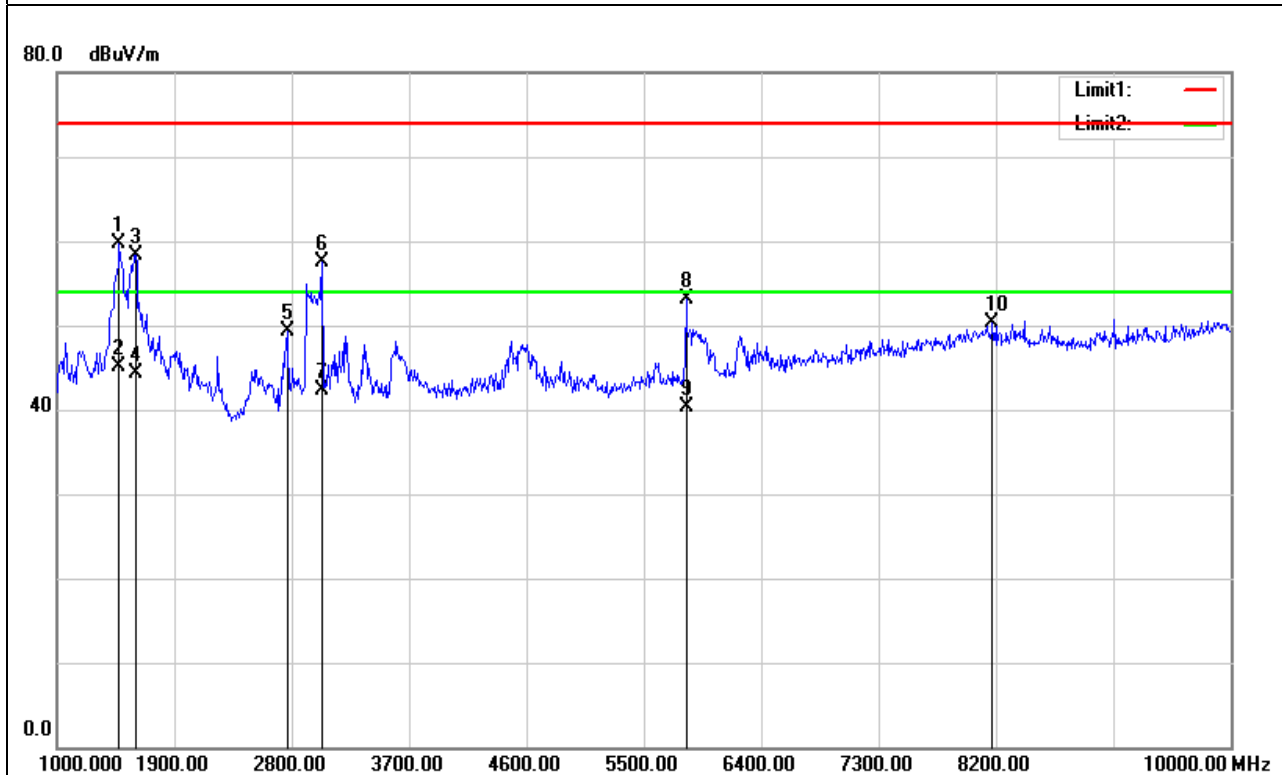

EUT :	液晶顯示器	Model Name :	LE65K6500U
Temperature :	26 °C	Relative Humidity :	60%
Pressure :	1010 hPa	Test Date :	2019-03-31
Test Mode :	TX CH06 (802.11n20 : Rate 6.5Mbps)	Polarization :	Vertical
Measurement Distance	3 m	Frenqucy Range	1GHz to 25GHz
Test Power :	AC 110/60Hz		


Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
1378.000	61.77	-5.67	56.10	74.00	-17.90	peak
1378.000	48.36	-5.67	42.69	54.00	-11.31	AVG
1594.000	65.55	-4.77	60.78	74.00	-13.22	peak
1594.000	49.14	-4.77	44.37	54.00	-9.63	AVG
1747.000	58.13	-3.86	54.27	74.00	-19.73	peak
1747.000	46.37	-3.86	42.51	54.00	-11.49	AVG
2764.000	52.53	-0.10	52.43	74.00	-21.57	peak
2764.000	40.36	-0.10	40.26	54.00	-13.74	AVG
2908.000	56.58	0.52	57.10	74.00	-16.90	peak
2908.000	43.10	0.52	43.62	54.00	-10.38	AVG
5824.000	46.72	4.70	51.42	74.00	-22.58	peak

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

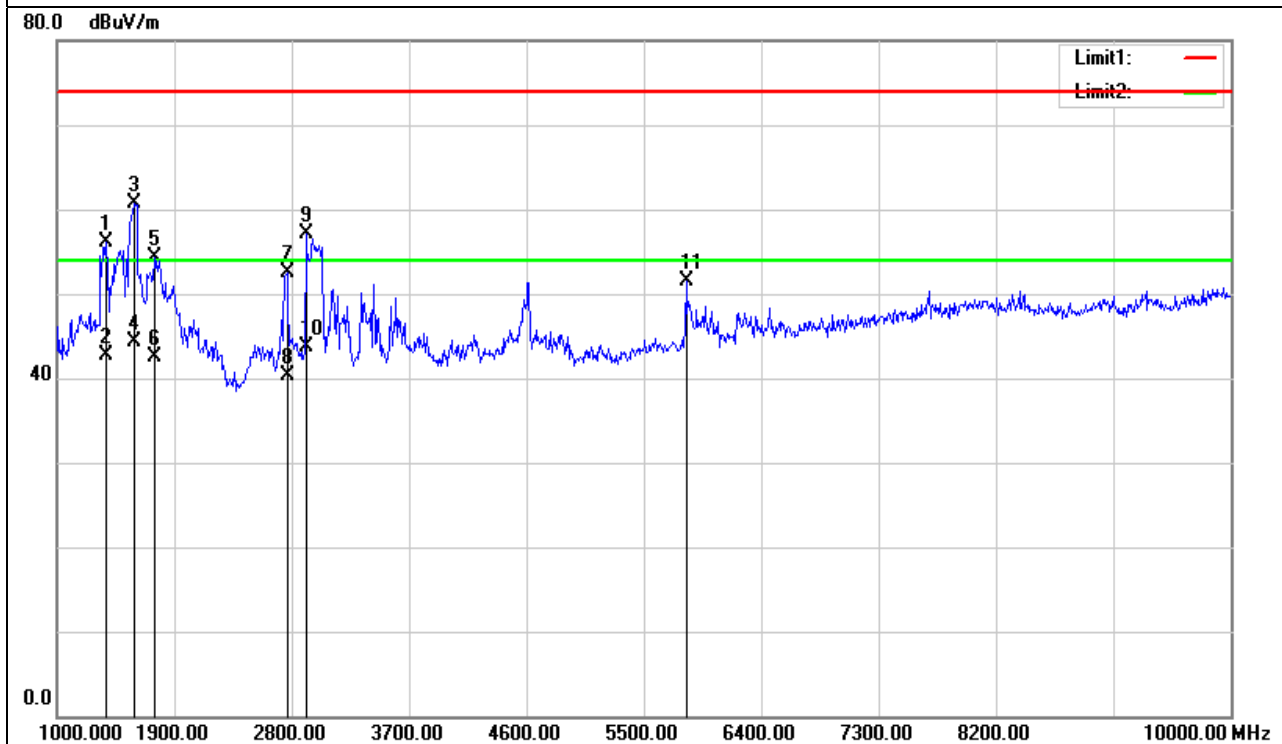


Horizontal

Detect: 10GHz -26.5GHz

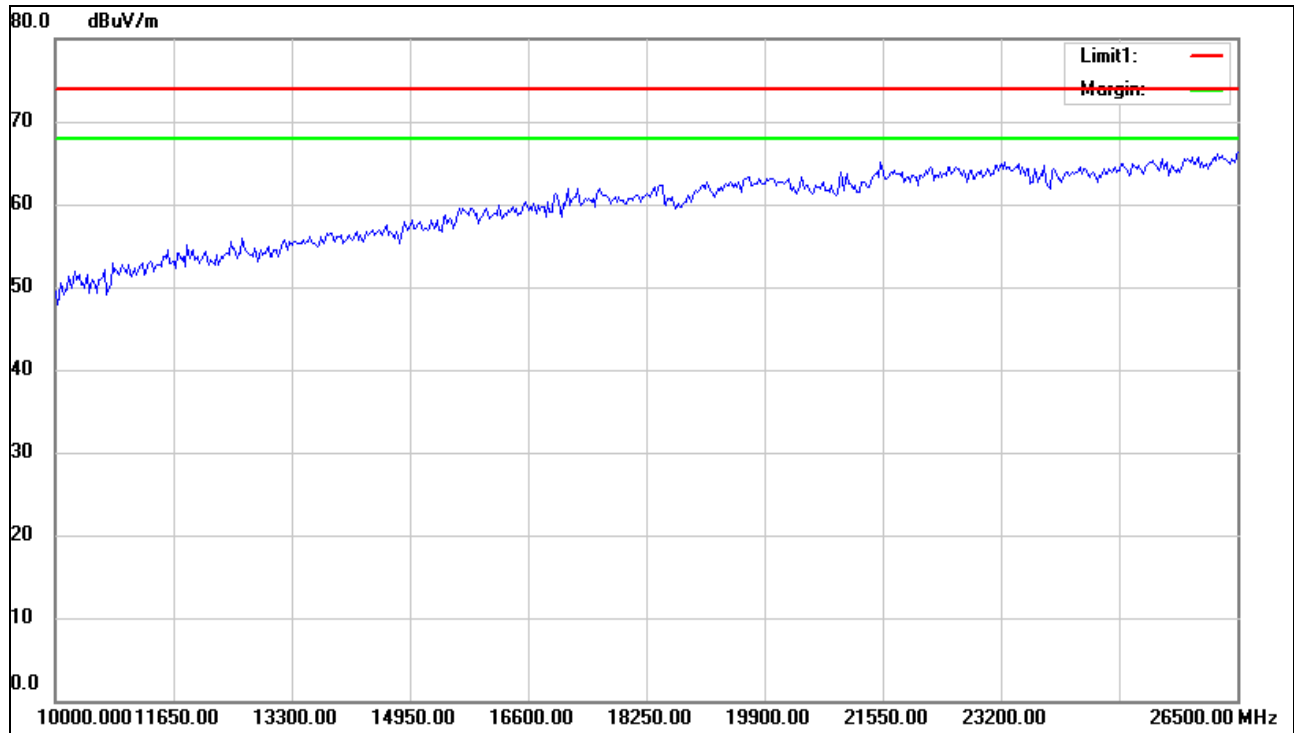

Vertical


Detect: 10GHz -26.5GHz

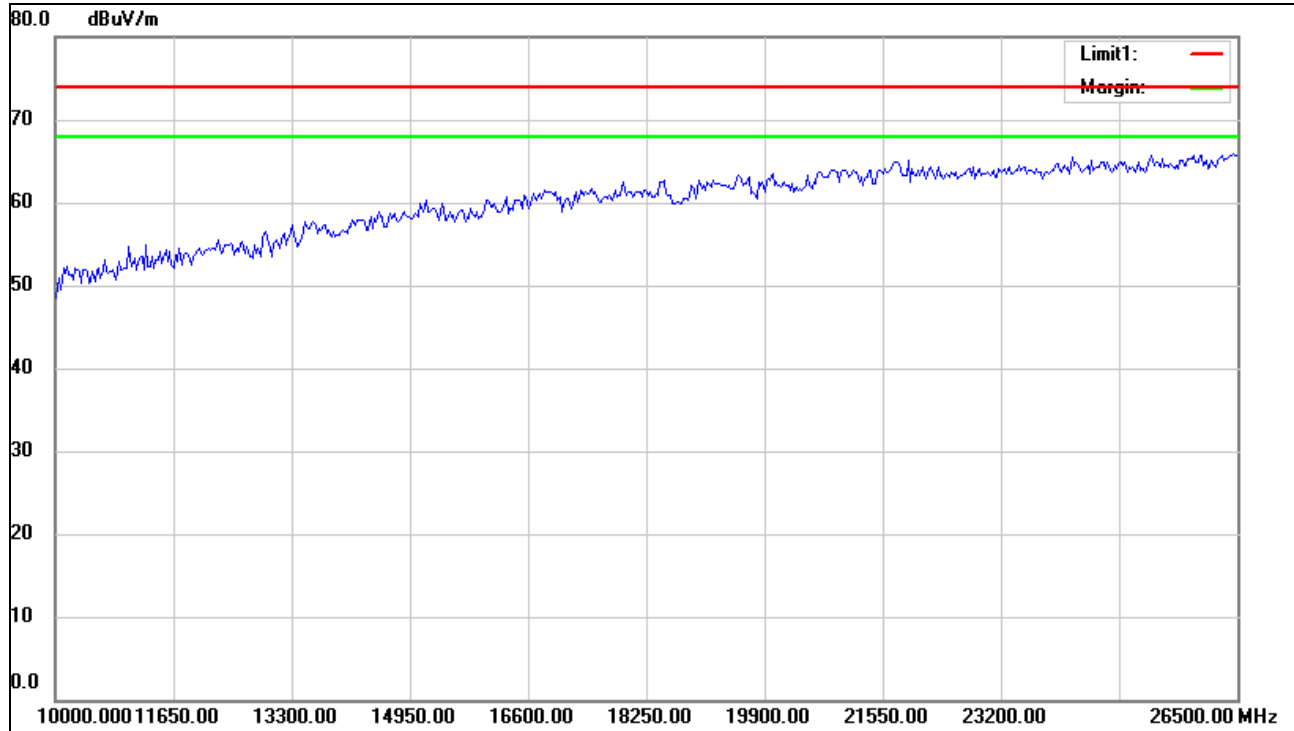

EUT :	液晶顯示器	Model Name :	LE65K6500U
Temperature :	26 °C	Relative Humidity :	60%
Pressure :	1010 hPa	Test Date :	2019-03-31
Test Mode :	TX CH11 (802.11n20 : Rate 6.5Mbps)	Polarization :	Horizontal
Measurement Distance	3 m	Frenqucy Range	1GHz to 25GHz
Test Power :	AC 110/60Hz		

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
1459.000	63.34	-5.45	57.89	74.00	-16.11	peak
1459.000	48.13	-5.45	42.68	54.00	-11.32	AVG
1603.000	63.50	-4.72	58.78	74.00	-15.22	peak
1603.000	48.46	-4.72	43.74	54.00	-10.26	AVG
2737.000	49.22	-0.22	49.00	74.00	-25.00	peak
3025.000	53.31	0.92	54.23	74.00	-19.77	peak
3025.000	40.34	0.92	41.26	54.00	-12.74	AVG
5824.000	49.54	4.70	54.24	74.00	-19.76	peak
5824.000	36.67	4.70	41.37	54.00	-12.63	AVG
7894.000	41.38	8.99	50.37	74.00	-23.63	peak


Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

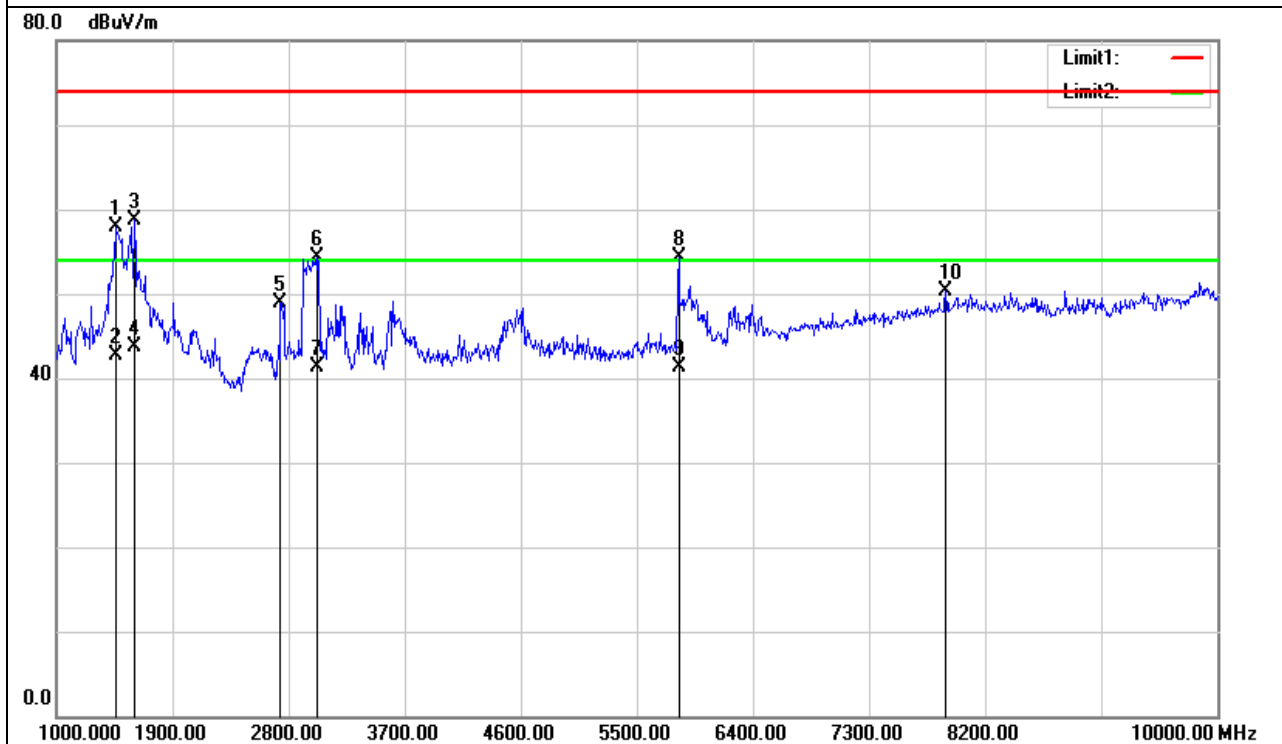

EUT :	液晶顯示器	Model Name :	LE65K6500U
Temperature :	26 °C	Relative Humidity :	60%
Pressure :	1010 hPa	Test Date :	2019-03-31
Test Mode :	TX CH11 (802.11n20 : Rate 6.5Mbps)	Polarization :	Vertical
Measurement Distance	3 m	Frenqucy Range	1GHz to 25GHz
Test Power :	AC 110/60Hz		


Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
1387.000	61.30	-5.64	55.66	74.00	-18.34	peak
1387.000	49.37	-5.64	43.73	54.00	-10.27	AVG
1477.000	61.01	-5.40	55.61	74.00	-18.39	peak
1477.000	48.92	-5.40	43.52	54.00	-10.48	AVG
1612.000	66.47	-4.67	61.80	74.00	-12.20	peak
1612.000	50.32	-4.67	45.65	54.00	-8.35	AVG
2764.000	52.16	-0.10	52.06	74.00	-21.94	peak
2764.000	41.48	-0.10	41.38	54.00	-12.62	AVG
3034.000	57.28	0.91	58.19	74.00	-15.81	peak
3034.000	44.35	0.91	45.26	54.00	-8.74	AVG
4609.000	48.38	2.48	50.86	74.00	-23.14	peak

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

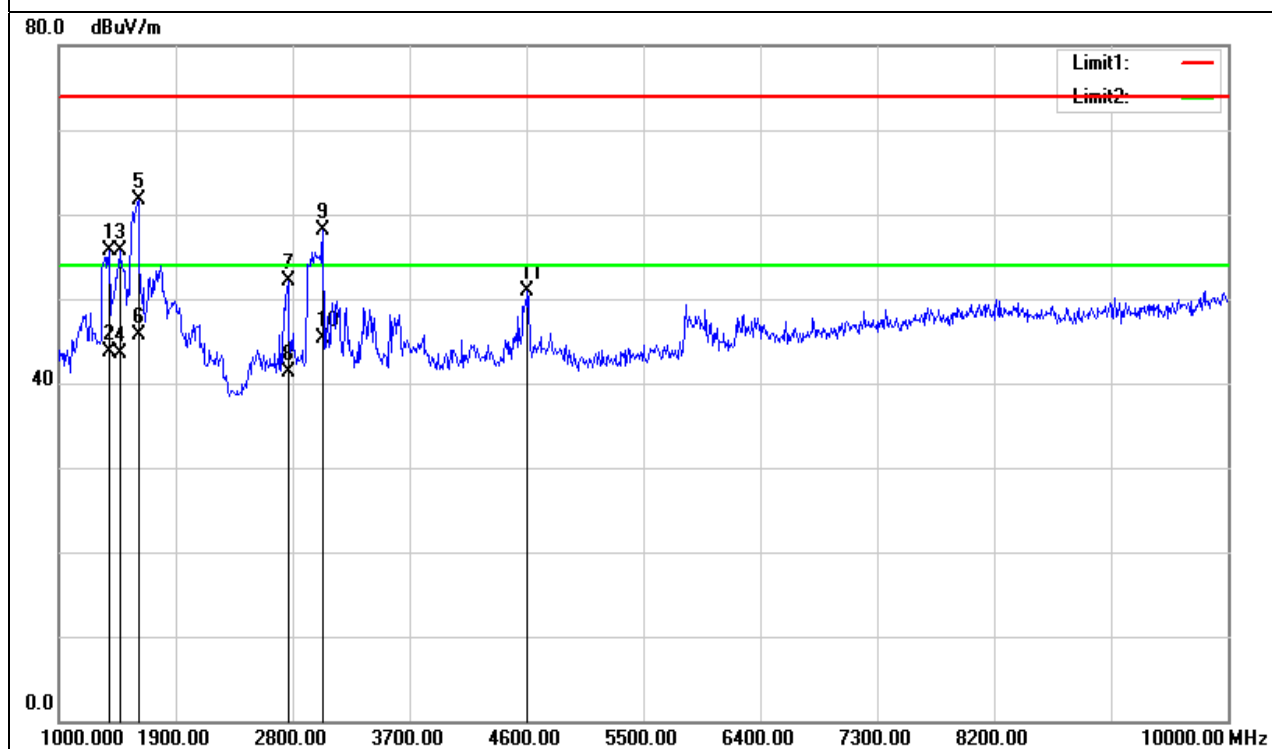


Horizontal

Detect: 10GHz -26.5GHz

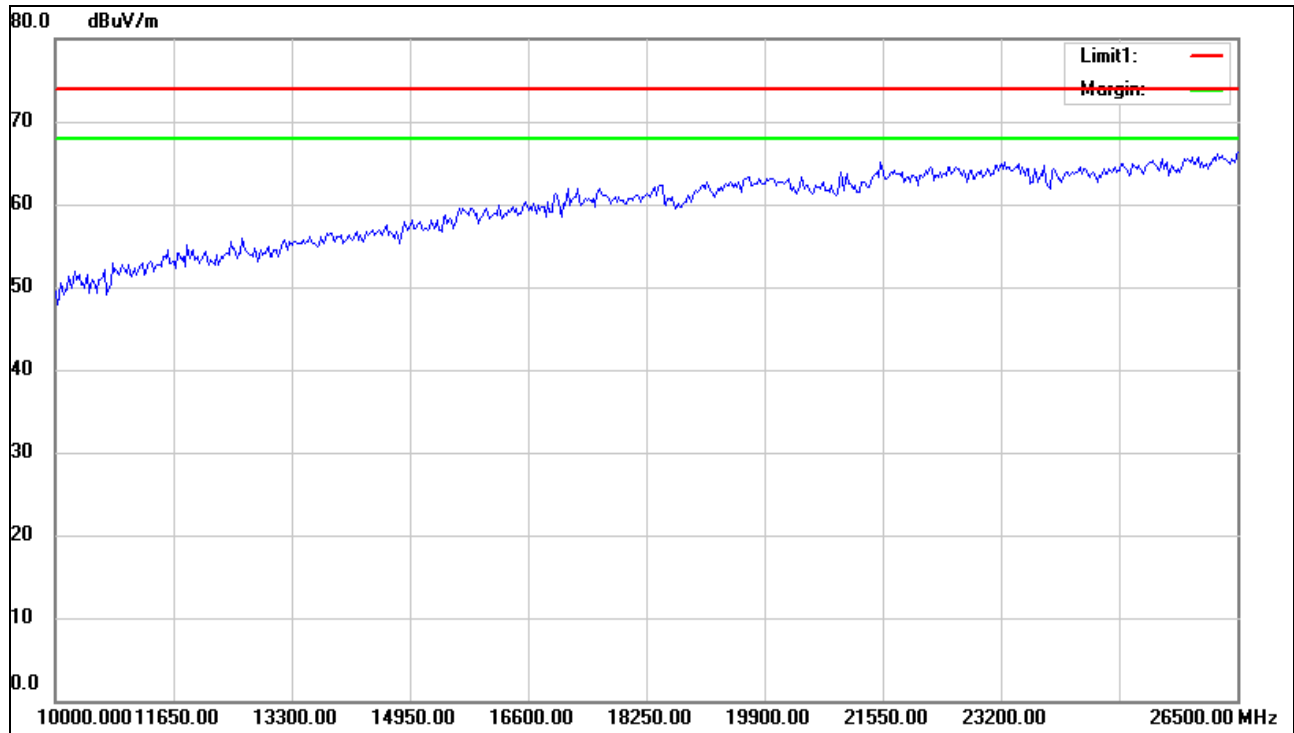

Vertical


Detect: 10GHz -26.5GHz

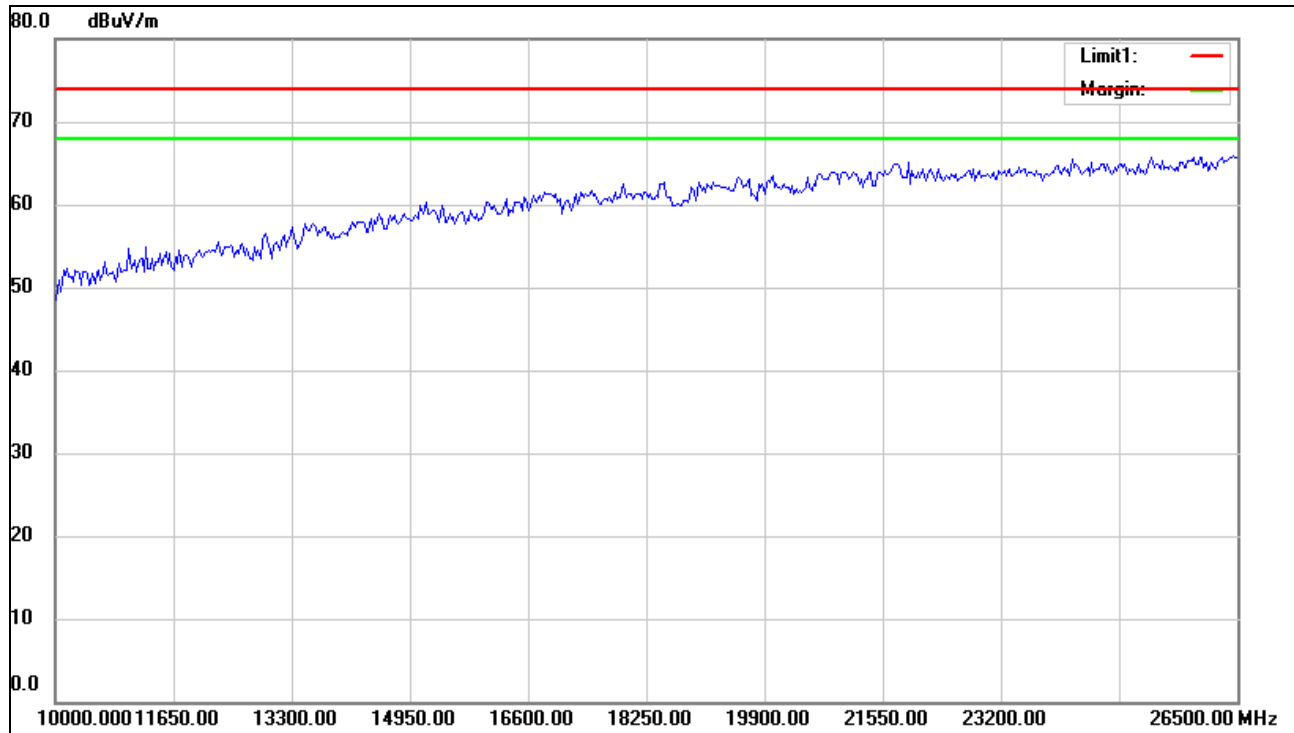

EUT :	液晶顯示器	Model Name :	LE65K6500U
Temperature :	26 °C	Relative Humidity :	60%
Pressure :	1010 hPa	Test Date :	2019-03-31
Test Mode :	TX CH03 (802.11n40 : Rate 13.5Mbps)	Polarization :	Horizontal
Measurement Distance	3 m	Frenqucy Range	1GHz to 25GHz
Test Power :	AC 110/60Hz		

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
1486.000	63.88	-5.37	58.51	74.00	-15.49	peak
1486.000	49.73	-5.37	44.36	54.00	-9.64	AVG
1576.000	63.20	-4.89	58.31	74.00	-15.69	peak
1576.000	48.15	-4.89	43.26	54.00	-10.74	AVG
3034.000	56.81	0.91	57.72	74.00	-16.28	peak
3034.000	44.60	0.91	45.51	54.00	-8.49	AVG
3610.000	47.81	1.07	48.88	74.00	-25.12	peak
4555.000	45.59	2.50	48.09	74.00	-25.91	peak
5824.000	46.95	4.70	51.65	74.00	-22.35	peak


Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

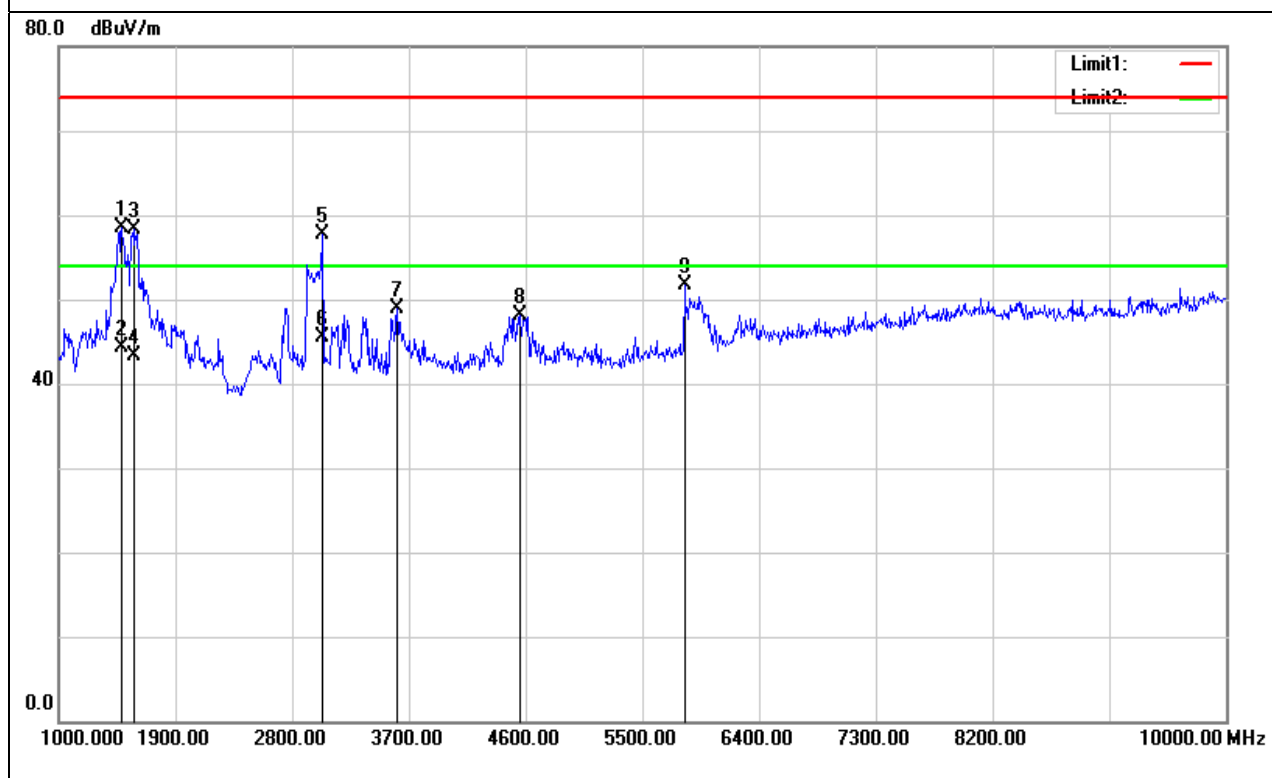

EUT :	液晶顯示器	Model Name :	LE65K6000U
Temperature :	26 °C	Relative Humidity :	60%
Pressure :	1010 hPa	Test Date :	2019-03-31
Test Mode :	TX CH03 (802.11n40 : Rate 13.5Mbps)	Polarization :	Vertical
Measurement Distance	3 m	Frenquency Range	1GHz to 25GHz
Test Power :	AC 110/60Hz		


Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
1351.000	62.12	-5.73	56.39	74.00	-17.61	peak
1351.000	49.29	-5.73	43.56	54.00	-10.44	AVG
1459.000	60.78	-5.45	55.33	74.00	-18.67	peak
1459.000	47.73	-5.45	42.28	54.00	-11.72	AVG
1594.000	66.23	-4.77	61.46	74.00	-12.54	peak
1594.000	50.10	-4.77	45.33	54.00	-8.67	AVG
2764.000	54.05	-0.10	53.95	74.00	-20.05	peak
2764.000	41.39	-0.10	41.29	54.00	-12.71	AVG
3034.000	56.87	0.91	57.78	74.00	-16.22	peak
3034.000	43.35	0.91	44.26	54.00	-9.74	AVG
4618.000	49.05	2.47	51.52	74.00	-22.48	peak
5824.000	48.54	4.70	53.24	74.00	-20.76	peak
5824.000	36.67	4.70	41.37	54.00	-12.63	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

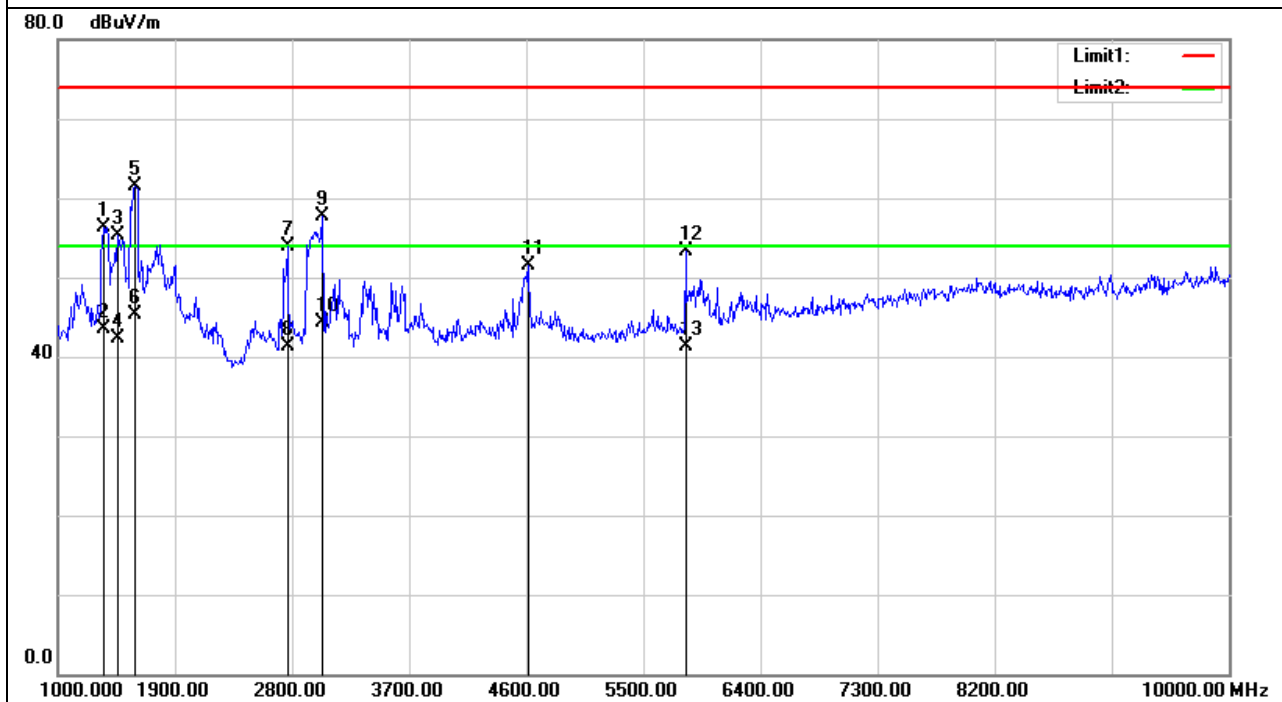


Horizontal

Detect: 10GHz -26.5GHz

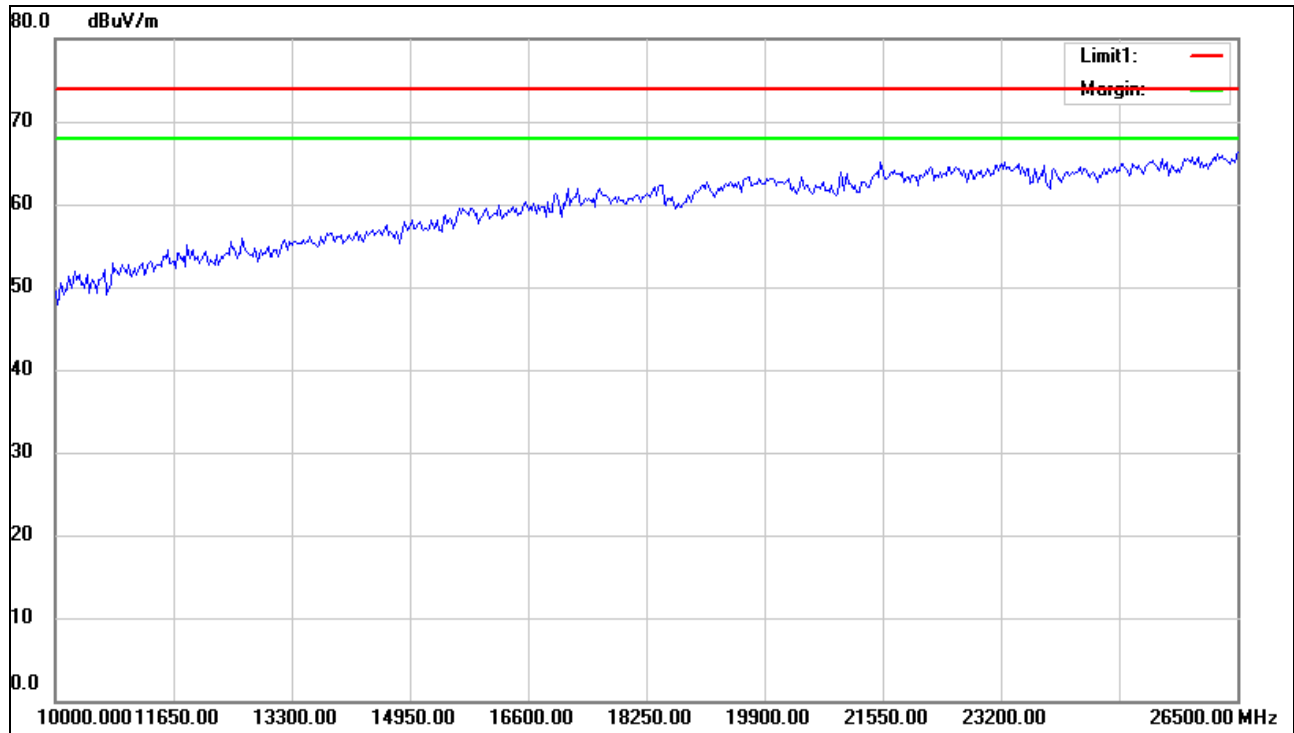

Vertical


Detect: 10GHz -26.5GHz

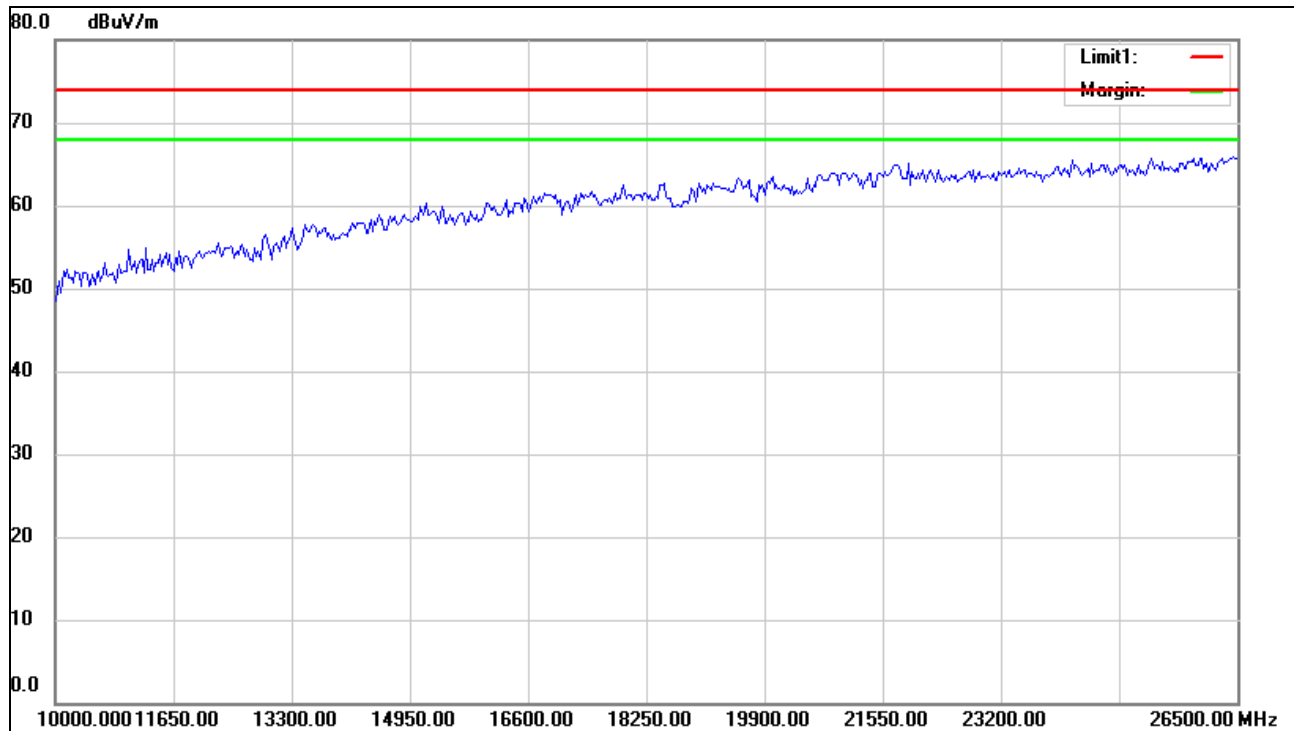

EUT :	液晶顯示器	Model Name :	LE65K6500U
Temperature :	26 °C	Relative Humidity :	60%
Pressure :	1010 hPa	Test Date :	2019-03-31
Test Mode :	TX CH06 (802.11n40 : Rate 13.5Mbps)	Polarization :	Horizontal
Measurement Distance	3 m	Frenqucy Range	1GHz to 25GHz
Test Power :	AC 110/60Hz		

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
1459.000	63.35	-5.45	57.90	74.00	-16.10	peak
1459.000	49.82	-5.45	44.37	54.00	-9.63	AVG
3034.000	54.81	0.91	55.72	74.00	-18.28	peak
3034.000	42.34	0.91	43.25	54.00	-10.75	AVG
3340.000	47.65	0.92	48.57	74.00	-25.43	peak
3628.000	48.43	1.09	49.52	74.00	-24.48	peak
4555.000	46.03	2.50	48.53	74.00	-25.47	peak
5824.000	48.85	4.70	53.55	74.00	-20.45	peak
5824.000	37.56	4.70	42.26	54.00	-11.74	AVG


Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

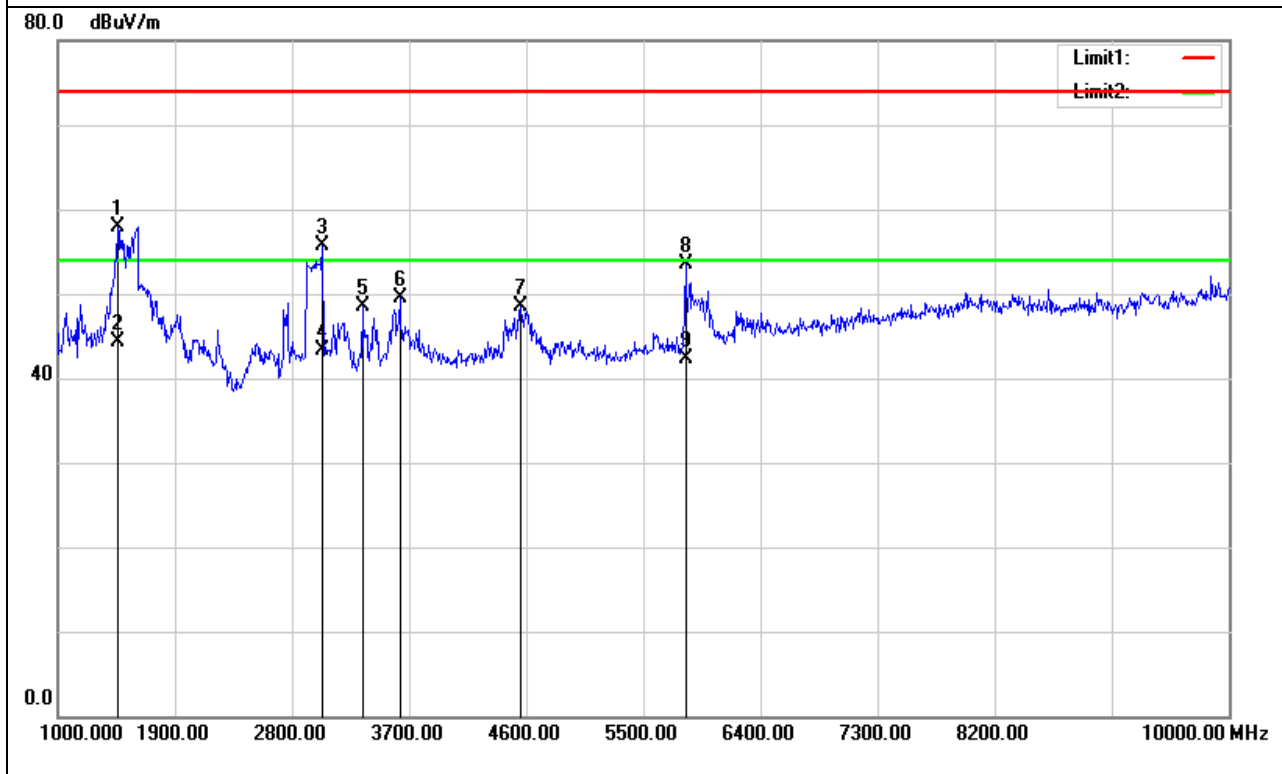

EUT :	液晶顯示器	Model Name :	LE65K6500U
Temperature :	26 °C	Relative Humidity :	60%
Pressure :	1010 hPa	Test Date :	2019-03-31
Test Mode :	TX CH06 (802.11n40 : Rate 13.5Mbps)	Polarization :	Vertical
Measurement Distance	3 m	Frenqucy Range	1GHz to 25GHz
Test Power :	AC 110/60Hz		


Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
1387.000	61.13	-5.64	55.49	74.00	-18.51	peak
1387.000	49.25	-5.64	43.61	54.00	-10.39	AVG
1612.000	65.44	-4.67	60.77	74.00	-13.23	peak
1612.000	45.49	-4.67	40.82	54.00	-13.18	AVG
1783.000	57.94	-3.65	54.29	74.00	-19.71	peak
1783.000	46.28	-3.65	42.63	54.00	-11.37	AVG
2764.000	55.09	-0.10	54.99	74.00	-19.01	peak
2764.000	42.61	-0.10	42.51	54.00	-11.49	AVG
3034.000	57.02	0.91	57.93	74.00	-16.07	peak
3034.000	42.83	0.91	43.74	54.00	-10.26	AVG
5824.000	46.99	4.70	51.69	74.00	-22.31	peak

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

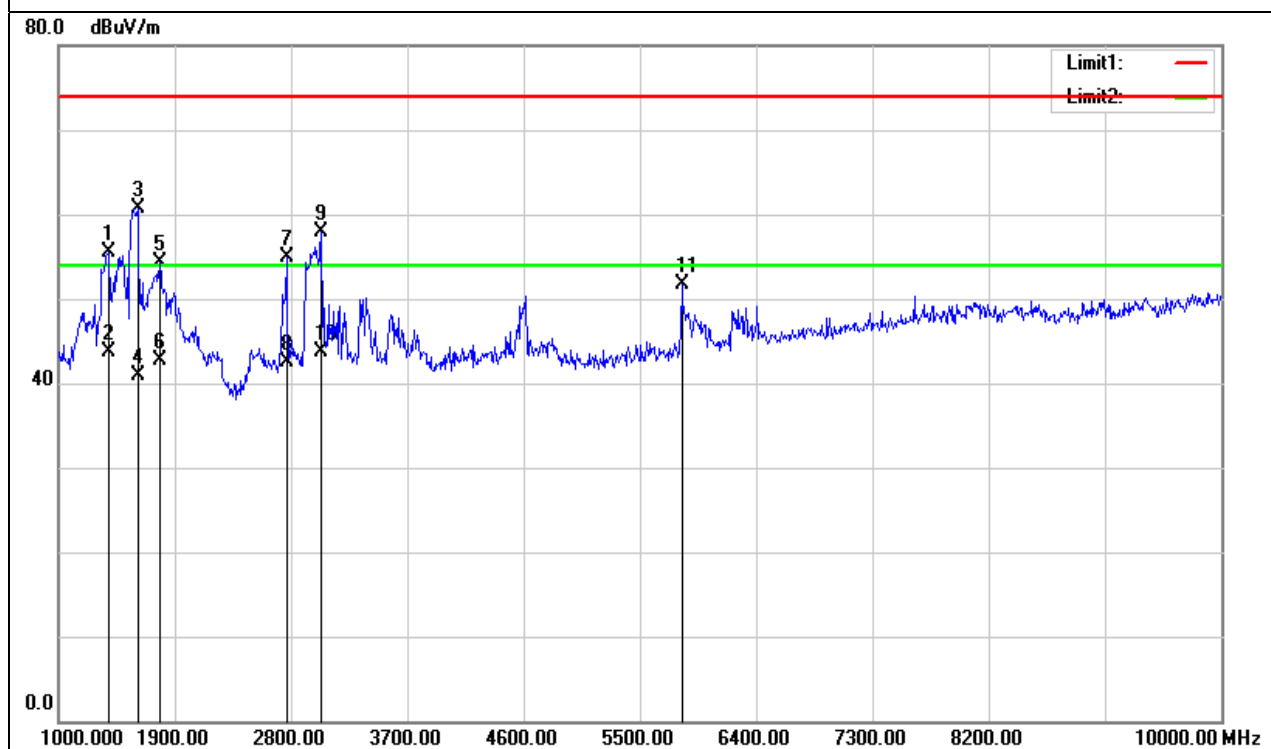


Horizontal

Detect: 10GHz -26.5GHz

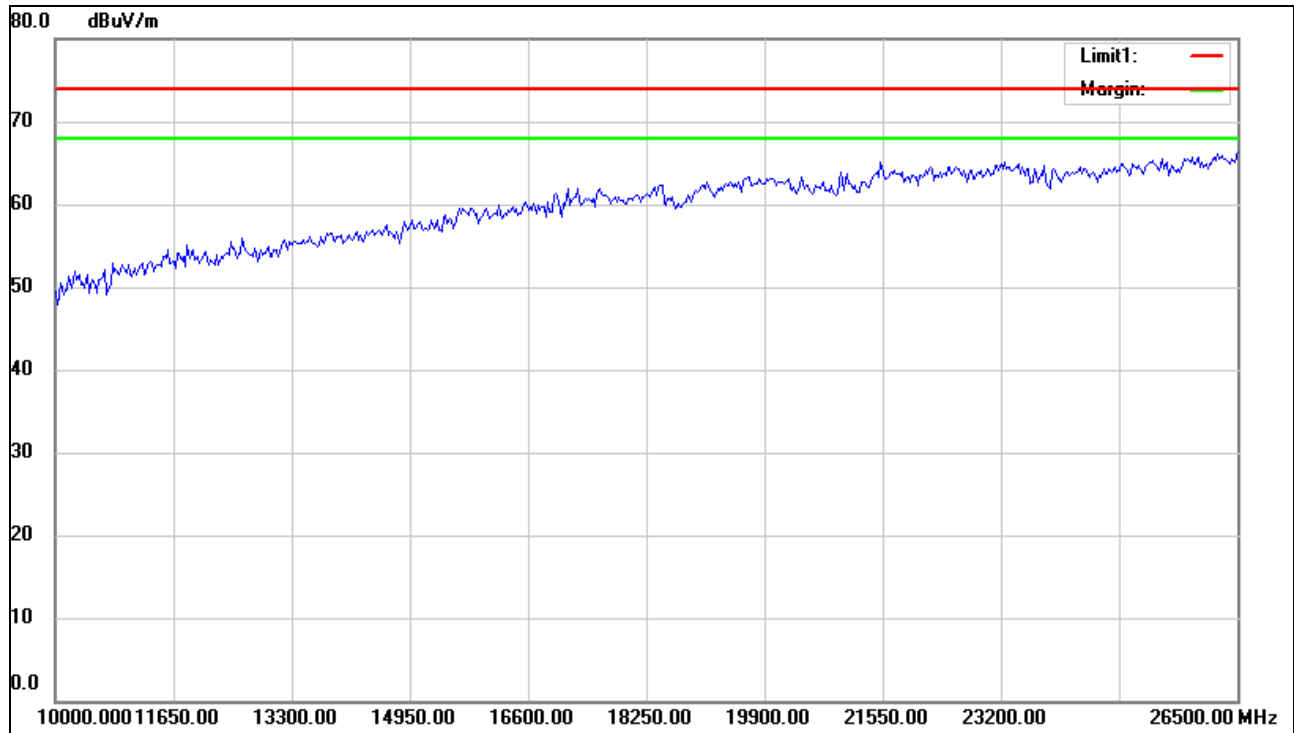

Vertical


Detect: 10GHz -26.5GHz

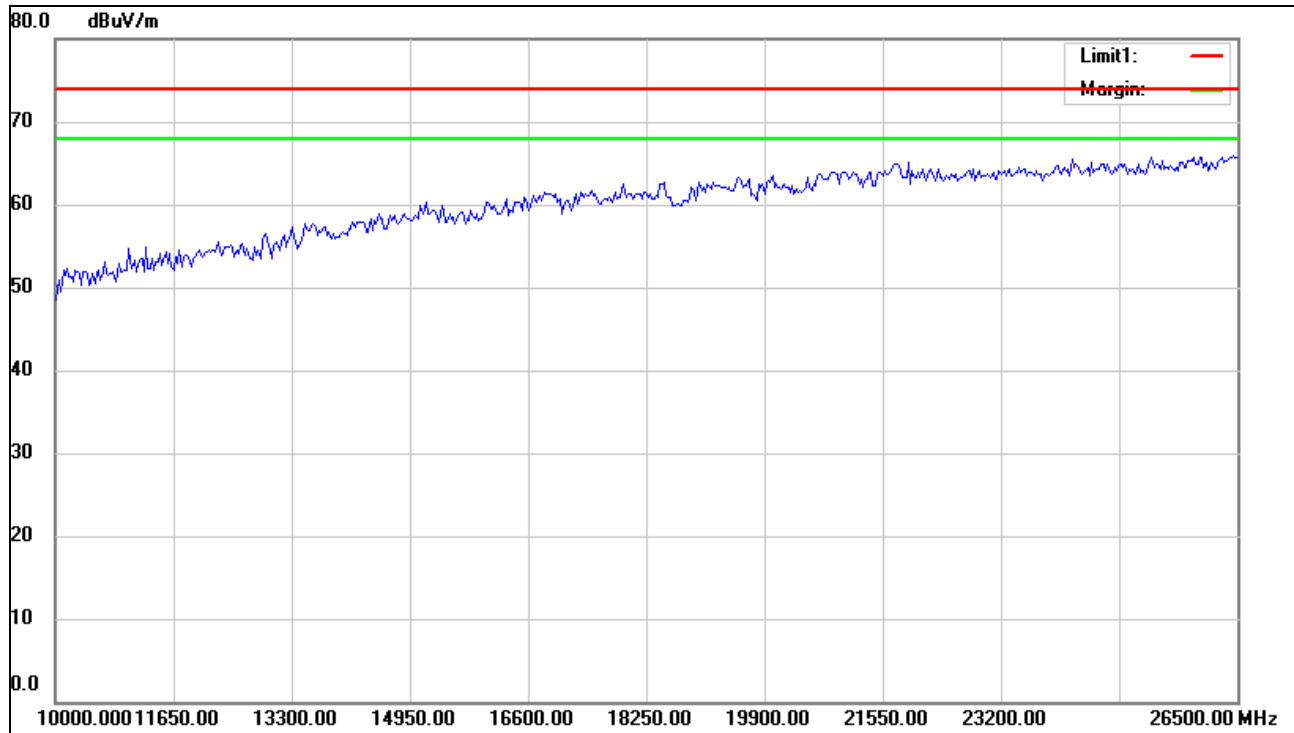

EUT :	液晶顯示器	Model Name :	LE65K6500U
Temperature :	26 °C	Relative Humidity :	60%
Pressure :	1010 hPa	Test Date :	2019-03-31
Test Mode :	TX CH09 (802.11n40 : Rate 13.5Mbps)	Polarization :	Horizontal
Measurement Distance	3 m	Frenqucy Range	1GHz to 25GHz
Test Power :	AC 110/60Hz		

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
1477.000	63.74	-5.40	58.34	74.00	-15.66	peak
1477.000	49.79	-5.40	44.39	54.00	-9.61	AVG
1603.000	63.13	-4.72	58.41	74.00	-15.59	peak
1603.000	48.34	-4.72	43.62	54.00	-10.38	AVG
3034.000	57.49	0.91	58.40	74.00	-15.60	peak
3034.000	44.36	0.91	45.27	54.00	-8.73	AVG
3619.000	49.97	1.08	51.05	74.00	-22.95	peak
4618.000	47.42	2.47	49.89	74.00	-24.11	peak
5824.000	46.39	4.70	51.09	74.00	-22.91	peak


Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

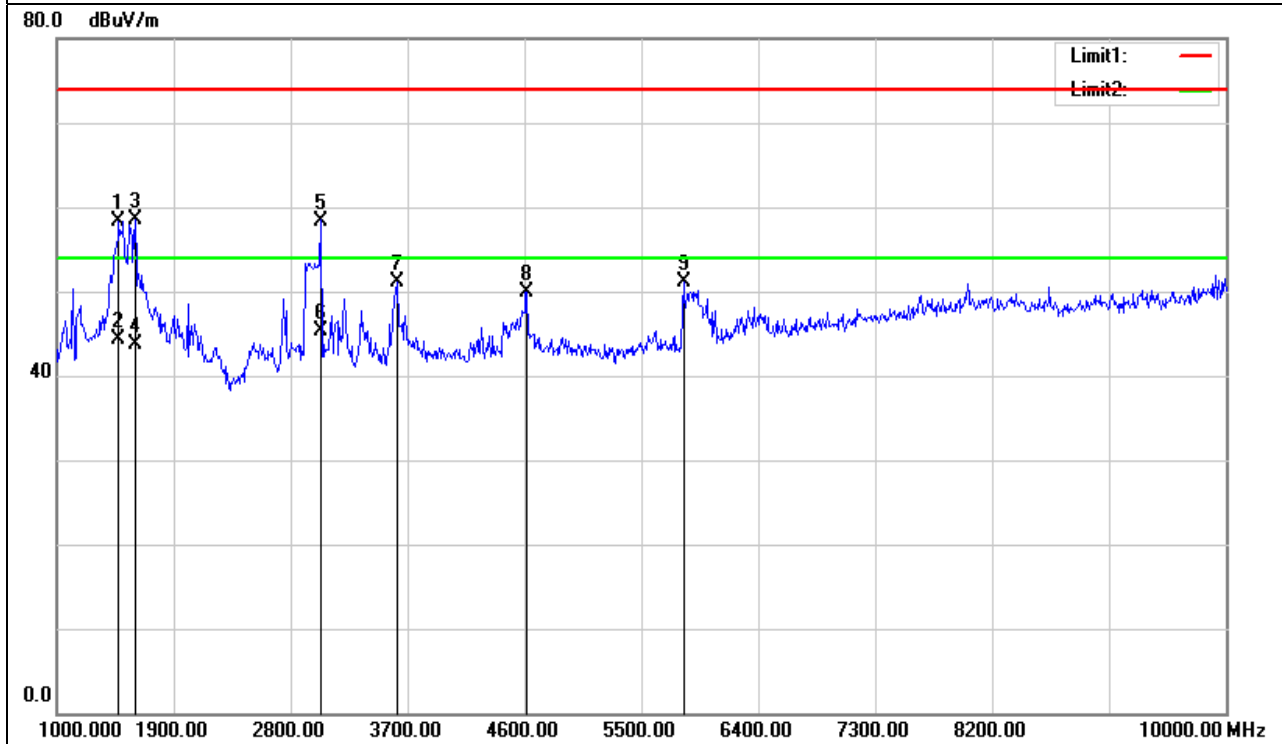

EUT :	液晶顯示器	Model Name :	LE65K6500U
Temperature :	26 °C	Relative Humidity :	60%
Pressure :	1010 hPa	Test Date :	2019-03-31
Test Mode :	TX CH09 (802.11n40 : Rate 13.5Mbps)	Polarization :	Vertical
Measurement Distance	3 m	Frequency Range	1GHz to 25GHz
Test Power :	AC 110/60Hz		


Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
1387.000	62.43	-5.64	56.79	74.00	-17.21	peak
1387.000	49.21	-5.64	43.57	54.00	-10.43	AVG
1603.000	67.70	-4.72	62.98	74.00	-11.02	peak
1603.000	50.01	-4.72	45.29	54.00	-8.71	AVG
1765.000	58.02	-3.75	54.27	74.00	-19.73	peak
1765.000	46.13	-3.75	42.38	54.00	-11.62	AVG
2764.000	52.70	-0.10	52.60	74.00	-21.40	peak
2764.000	44.72	-0.10	44.62	54.00	-9.38	AVG
3034.000	57.94	0.91	58.85	74.00	-15.15	peak
3034.000	44.46	0.91	45.37	54.00	-8.63	AVG
5824.000	47.57	4.70	52.27	74.00	-21.73	peak
5824.000	35.53	4.70	40.23	54.00	-13.77	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

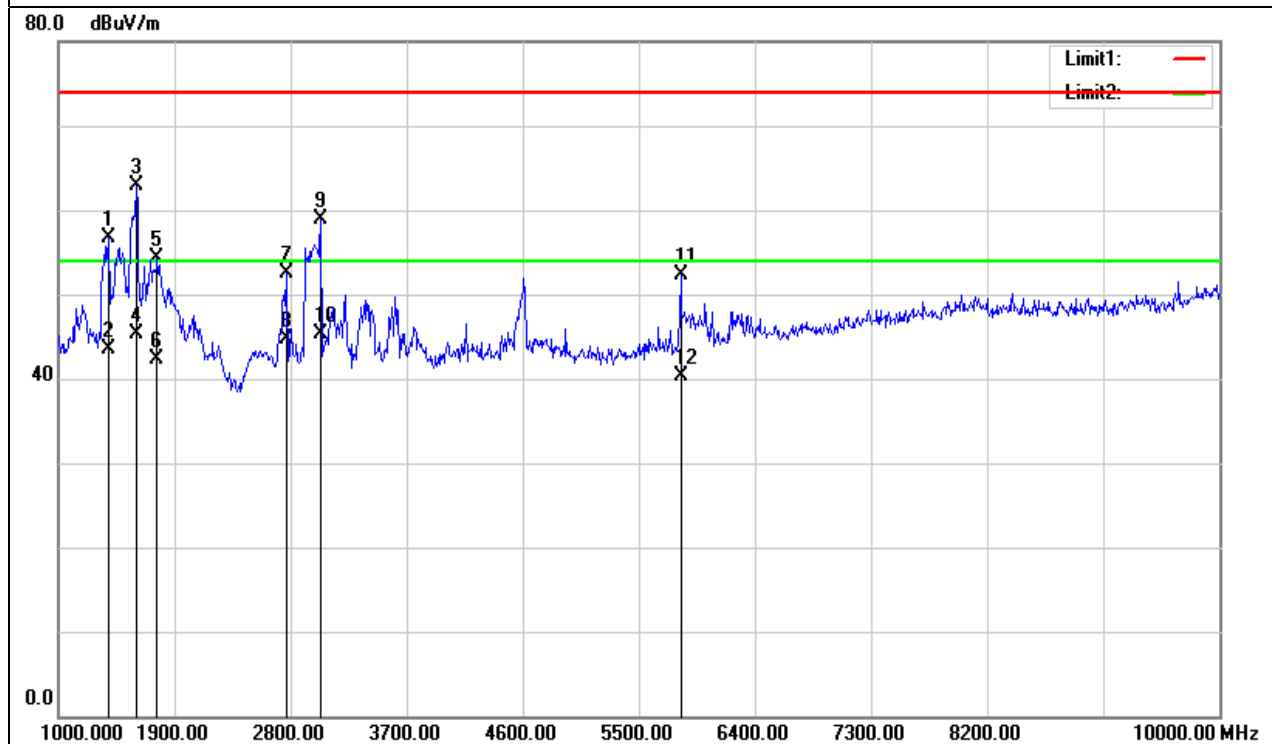


Horizontal

Detect: 10GHz -26.5GHz

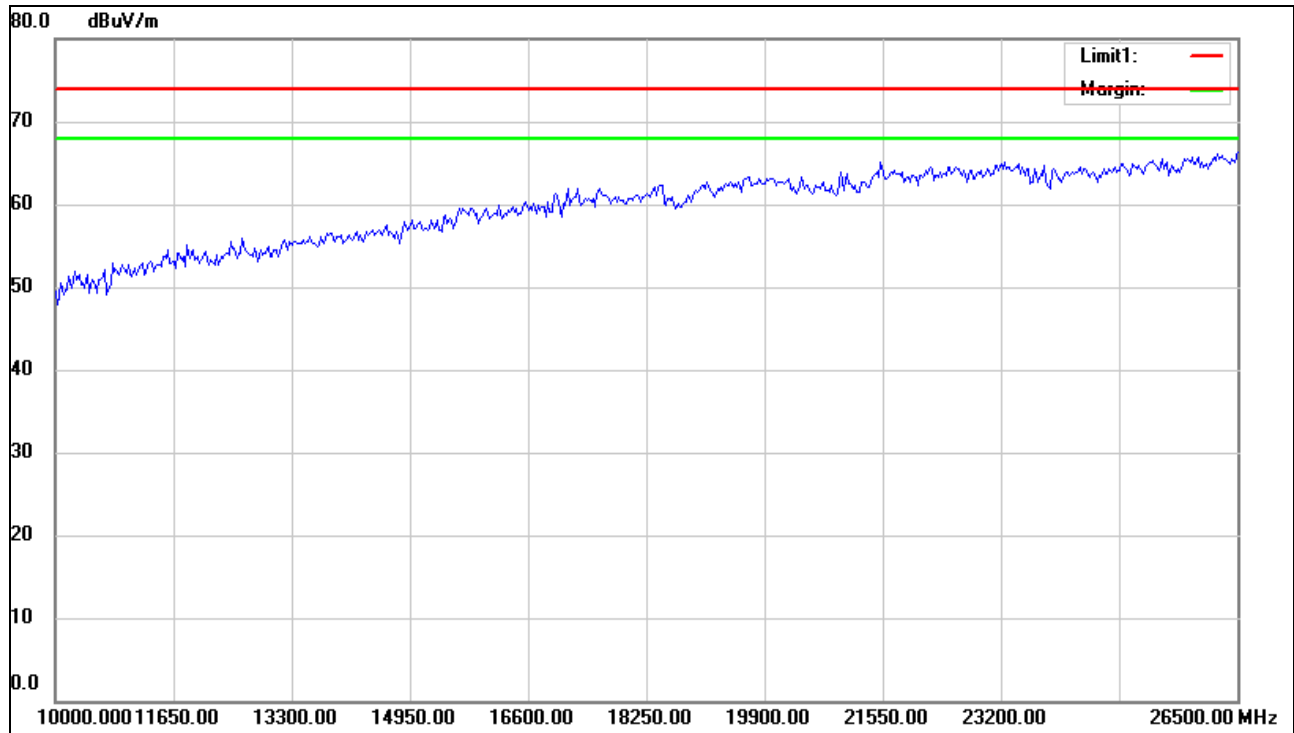

Vertical


Detect: 10GHz -26.5GHz

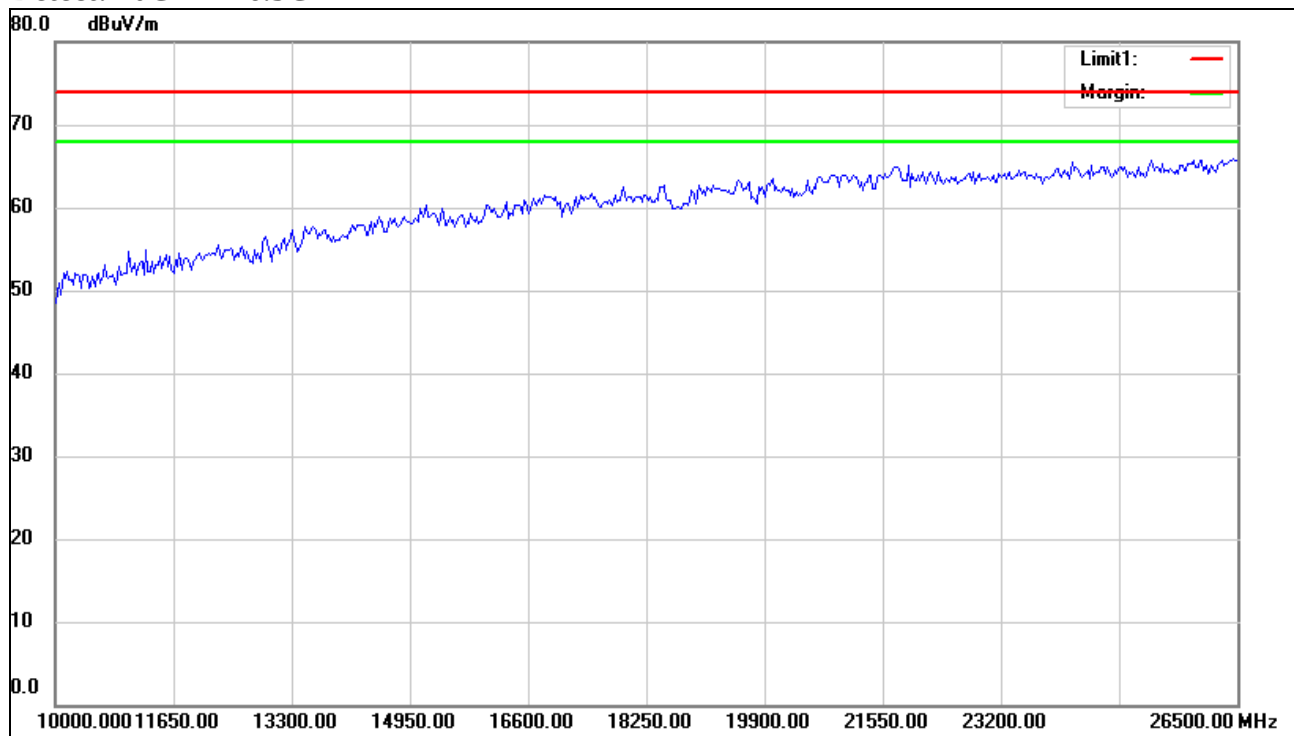

EUT :	液晶顯示器	Model Name :	LE65K6500U
Temperature :	26 °C	Relative Humidity :	60%
Pressure :	1010 hPa	Test Date :	2019-03-31
Test Mode :	RX	Polarization :	Horizontal
Measurement Distance	3 m	Frenqucy Range	1GHz to 25GHz
Test Power :	AC 110/60Hz		

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
1495.000	63.49	-5.35	58.14	74.00	-15.86	peak
1495.000	48.97	-5.35	43.62	54.00	-10.38	AVG
1612.000	62.95	-4.67	58.28	74.00	-15.72	peak
1612.000	48.81	-4.67	44.14	54.00	-9.86	AVG
3034.000	54.74	0.91	55.65	74.00	-18.35	peak
3034.000	41.61	0.91	42.52	54.00	-11.48	AVG
3619.000	50.58	1.08	51.66	74.00	-22.34	peak
5824.000	47.17	4.70	51.87	74.00	-22.13	peak
8101.000	42.15	9.14	51.29	74.00	-22.71	peak


Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

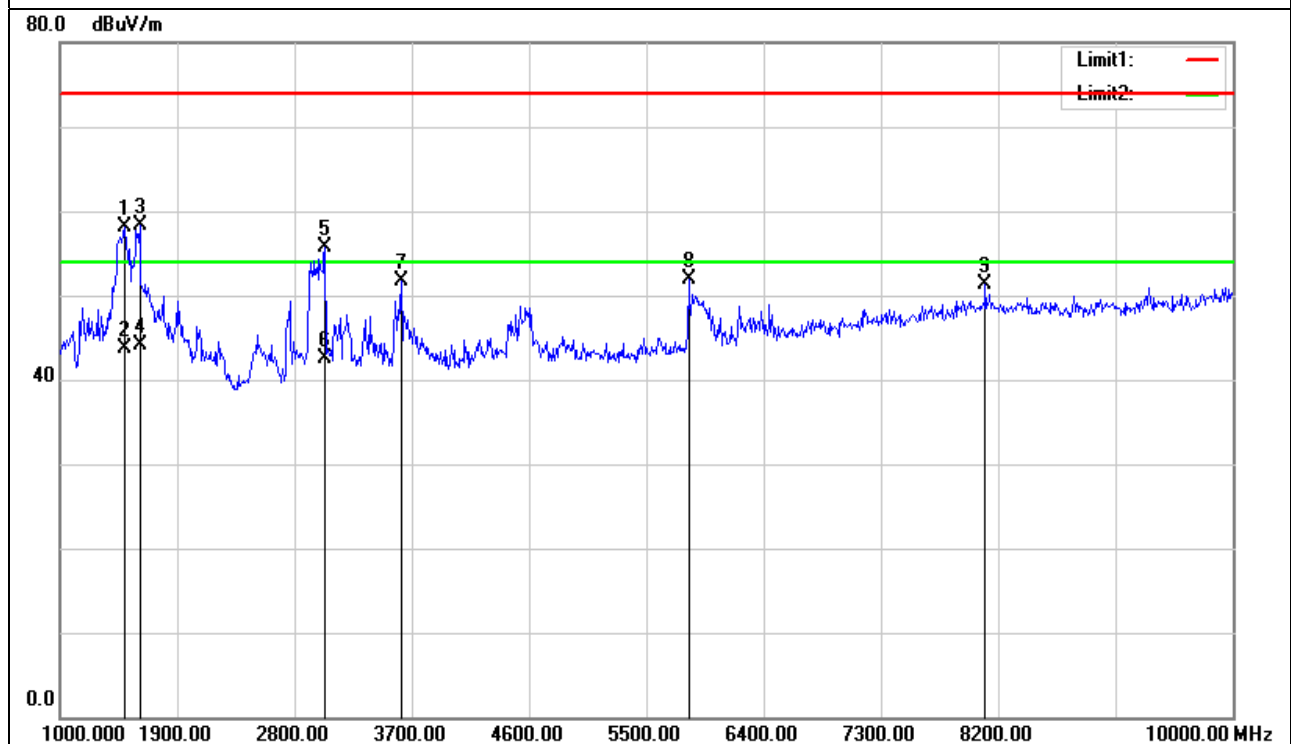

EUT :	液晶顯示器	Model Name :	LE65K6500U
Temperature :	26 °C	Relative Humidity :	60%
Pressure :	1010 hPa	Test Date :	2019-03-31
Test Mode :	RX	Polarization :	Vertical
Measurement Distance	3 m	Frenqucy Range	1GHz to 25GHz
Test Power :	AC 110/60Hz		


Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
1351.000	62.34	-5.73	56.61	74.00	-17.39	peak
1351.000	48.89	-5.73	43.16	54.00	-10.84	AVG
1585.000	66.97	-4.84	62.13	74.00	-11.87	peak
1585.000	50.06	-4.84	45.22	54.00	-8.78	AVG
1756.000	58.26	-3.82	54.44	74.00	-19.56	peak
1756.000	46.16	-3.82	42.34	54.00	-11.66	AVG
2908.000	56.85	0.52	57.37	74.00	-16.63	peak
2908.000	43.86	0.52	44.38	54.00	-9.62	AVG
4618.000	49.54	2.47	52.01	74.00	-21.99	peak

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

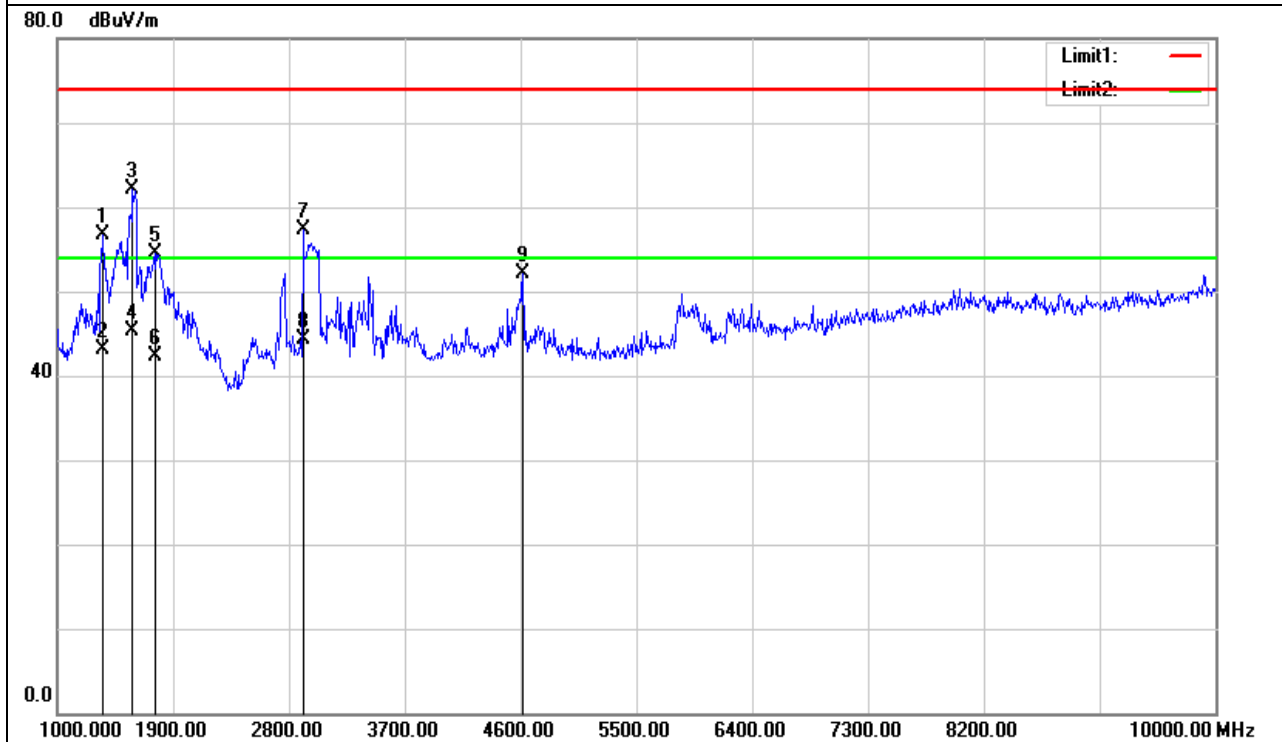


Horizontal

Detect: 10GHz -26.5GHz

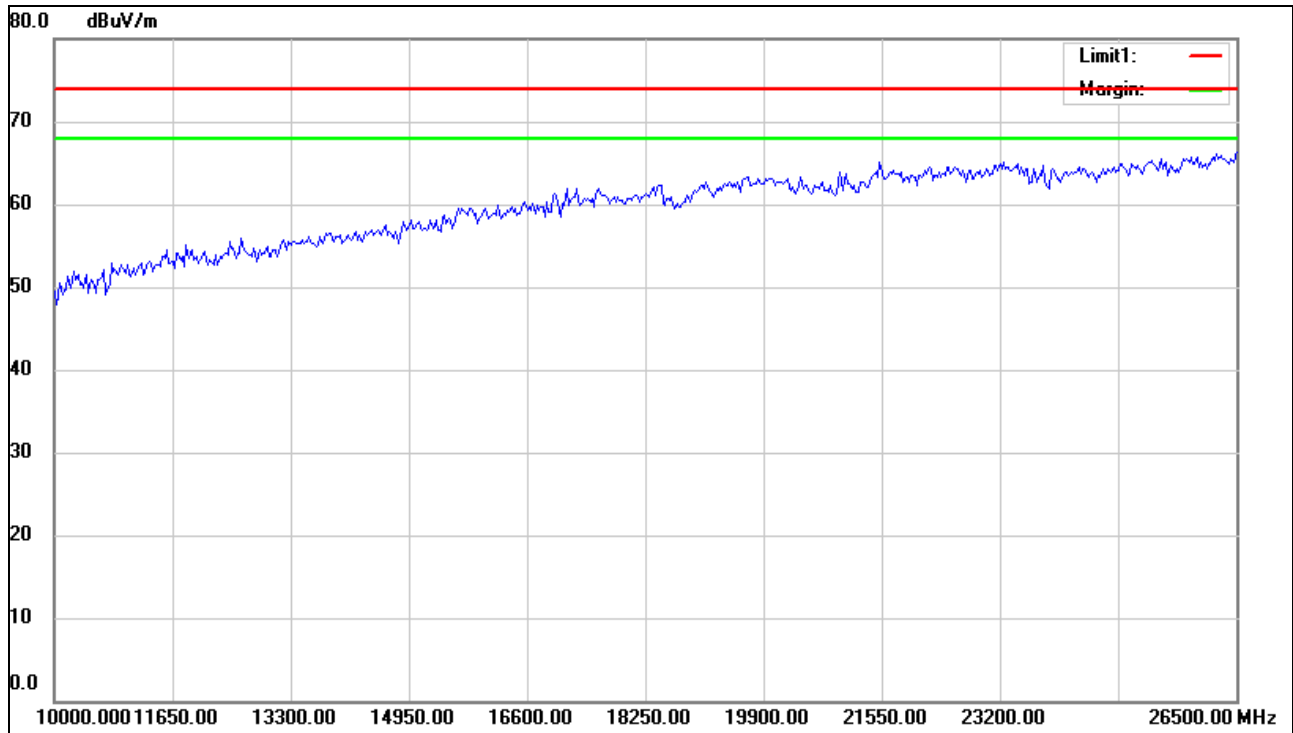

Vertical

Detect: 10GHz -26.5GHz

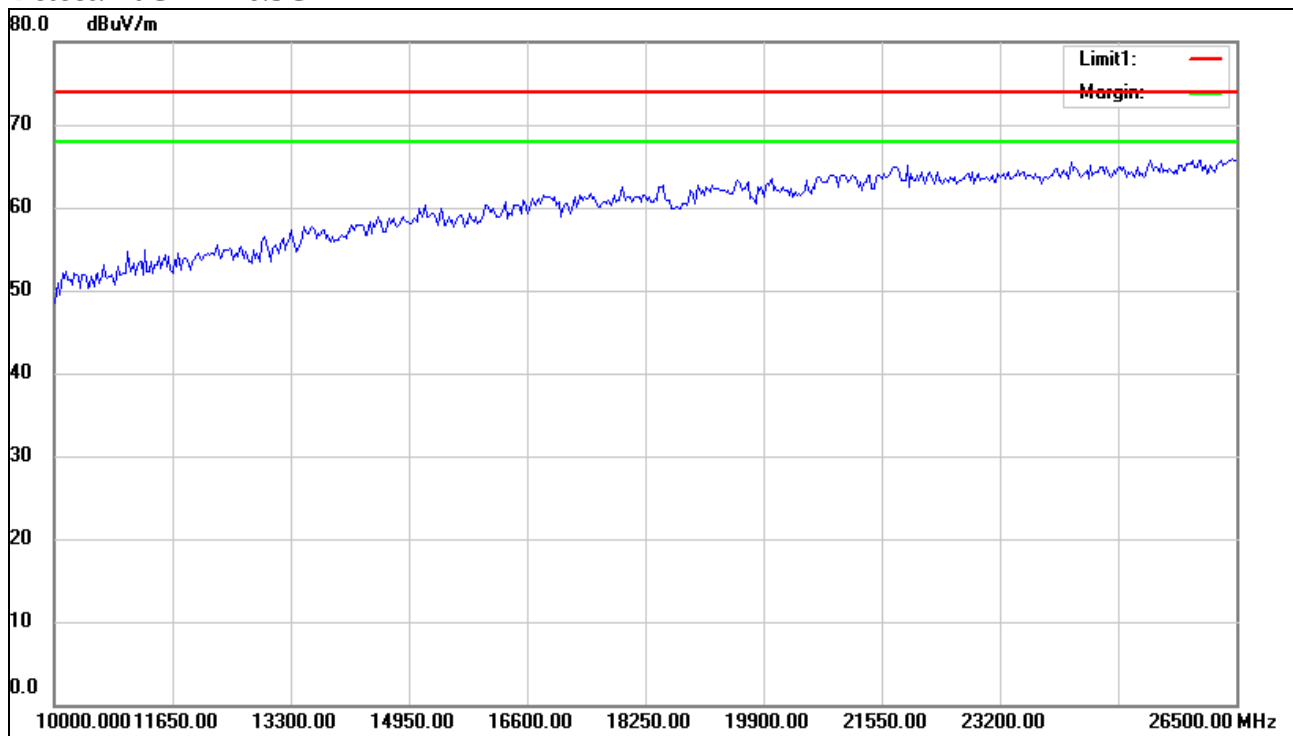

Remark:

No any other emissions level which are attenuated less than 20dB below the limit. No recording in the test report.

3.2.7 TEST RESULTS (RESTRICTED BANDS REQUIREMENTS)

EUT :	液晶顯示器	Model Name :	LE65K6500U
Temperature :	24 °C	Relative Humidity :	51%
Pressure :	1010 hPa	Test Voltage :	AC 110/60Hz
Test Mode :	802.11b Data rate 1Mbps		
Note :	1. The transmitter was setup to transmit at the lowest channel (CH01). Then the field strength was measured at 2310-2390 MHz. 2. The transmitter was setup to transmit at the highest channel (CH11). Then the field strength was measured at 2483.5-2500 MHz. 3. The data of 2390MHz and 2483.5MHz was the worst.		

Freq. (MHz) (Peak)	Freq. (MHz) (AV)	Ant.Pol. H/V	Reading		Ant/CF		Act		Limit		Note
			Peak (dBuv)	AV (dBuv)	Peak (dB)	AV (dB)	Peak (dBuv/m)	AV (dBuv/m)	Peak (dBuv/m)	AV (dBuv/m)	
2390.000	2390.000	V	44.03	54.91	-2.86	-2.86	41.17	52.05	74.00	54.00	CH01
2411.160	2411.880	V	100.56	104.85	-2.75	-2.74	---	---	---	---	CH01
2390.000	2390.000	H	56.55	44.62	-2.86	-2.86	53.69	41.76	74.00	54.00	CH01
2412.000	2411.160	H	106.98	102.61	-2.74	-2.75	---	---	---	---	CH01
2461.900	2461.150	V	106.73	102.27	-2.47	-2.47	---	---	---	---	CH11
2483.500	2483.500	V	56.72	45.35	-2.35	-2.35	54.37	43.00	74.00	54.00	CH11
2462.000	2462.800	H	97.41	92.01	-2.47	-2.46	---	---	---	---	CH11
2483.500	2483.500	H	55.58	43.72	-2.35	-2.35	53.23	41.37	74.00	54.00	CH11

Remark :


- (1) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode
- (2) EUT Orthogonal Axis :
“X” - denotes Laid on Table ; ”Y” - denotes Vertical Stand ; ”Z” - denotes Side Stand
- (3) During the measurements above 1 GHz it is taken care of that the EUT is always within the 3 dB cone of radiation BW of the used antenna
- (4) Corr.Factor = Antenna Factor + Cable Loss – Pre-amplifier.

CH-Low (CH01)

Detector mode: Peak

Polarity: Vertical


110.0 dBuV/m

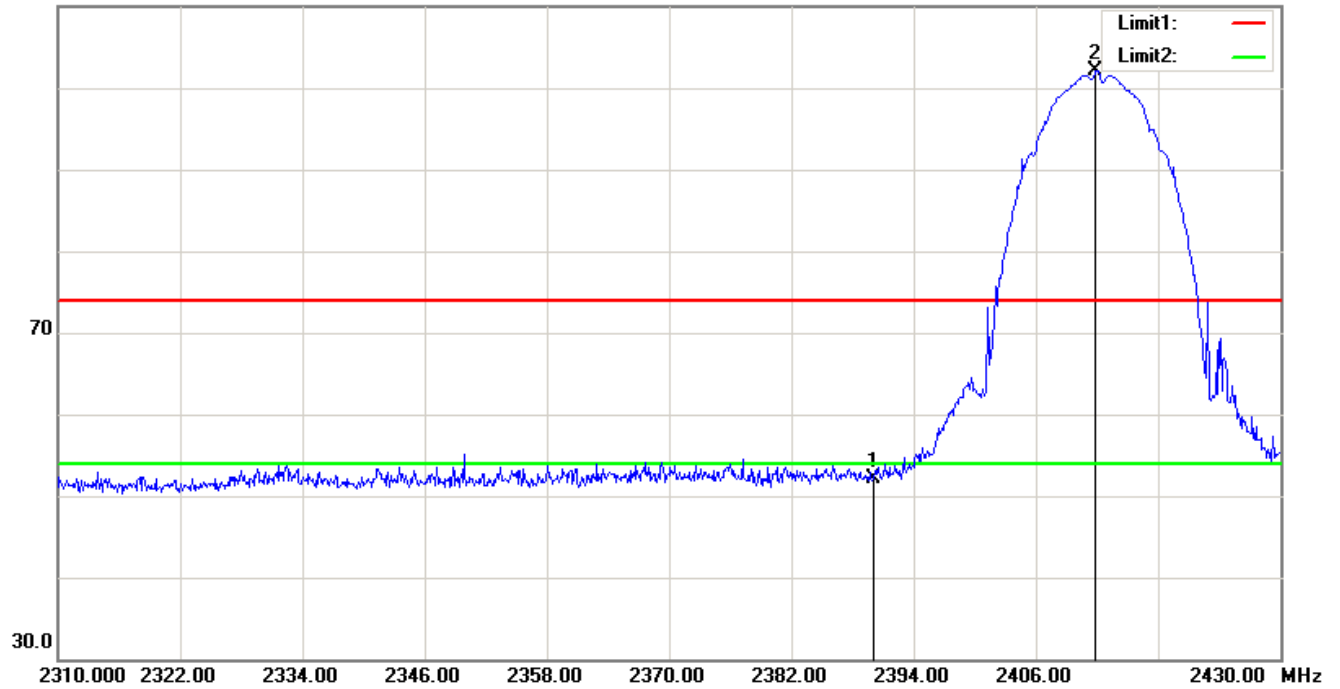

Detector mode: Average

Polarity: Vertical


110.0 dBuV/m

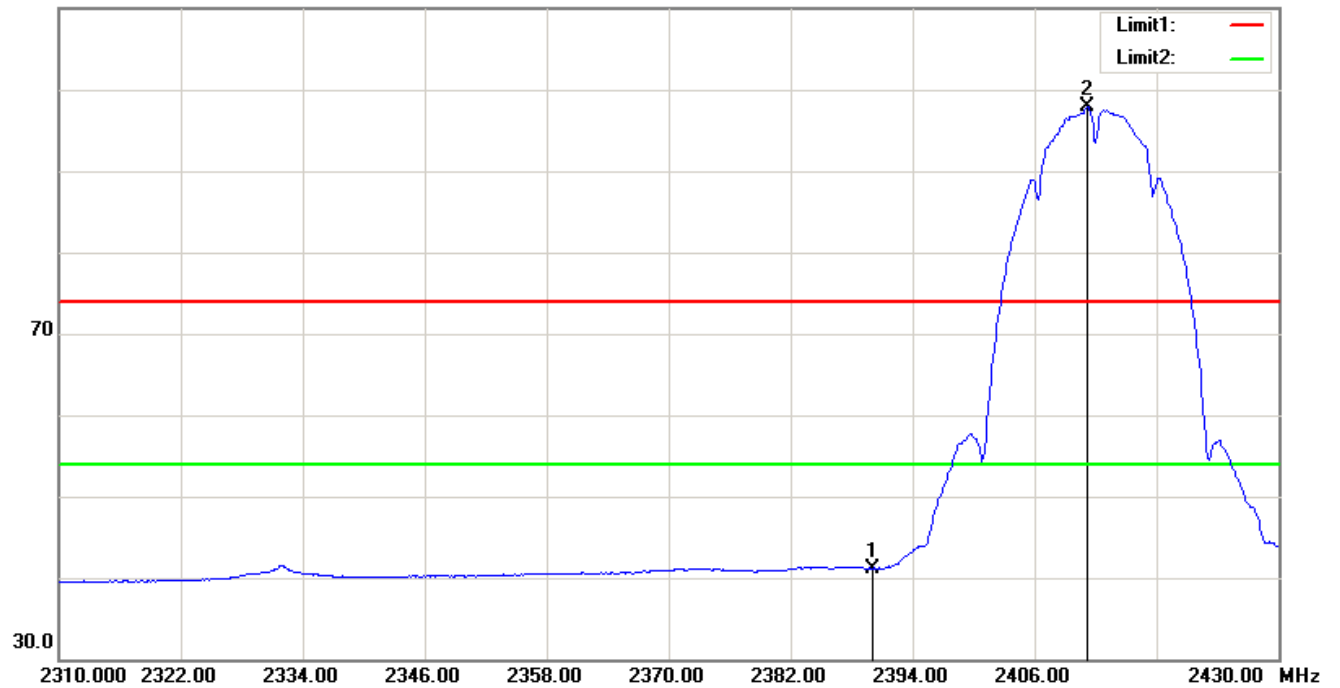

CH-Low (CH01)


Detector mode: Peak
110.0 dBuV/m

Polarity: Horizontal

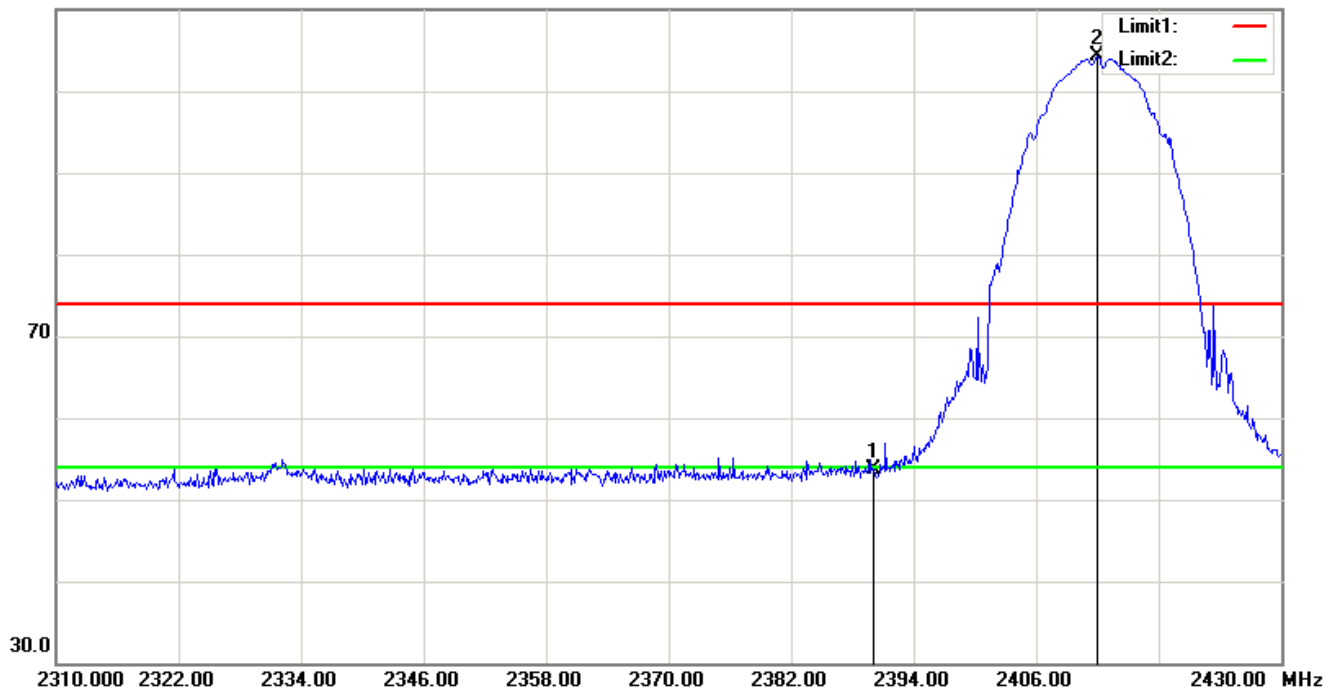

Detector mode: Average
110.0 dBuV/m

Polarity: Horizontal

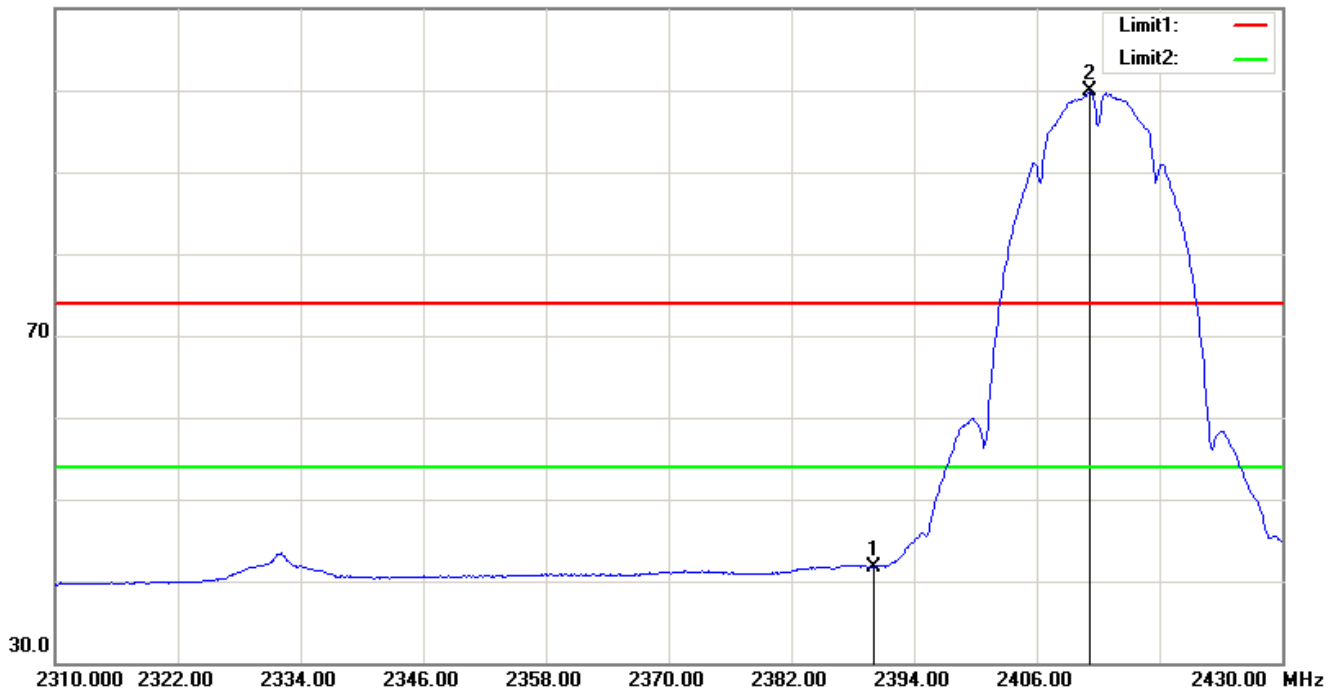


CH-High (CH11)

Detector mode: Peak

Polarity: Vertical


110.0 dBuV/m

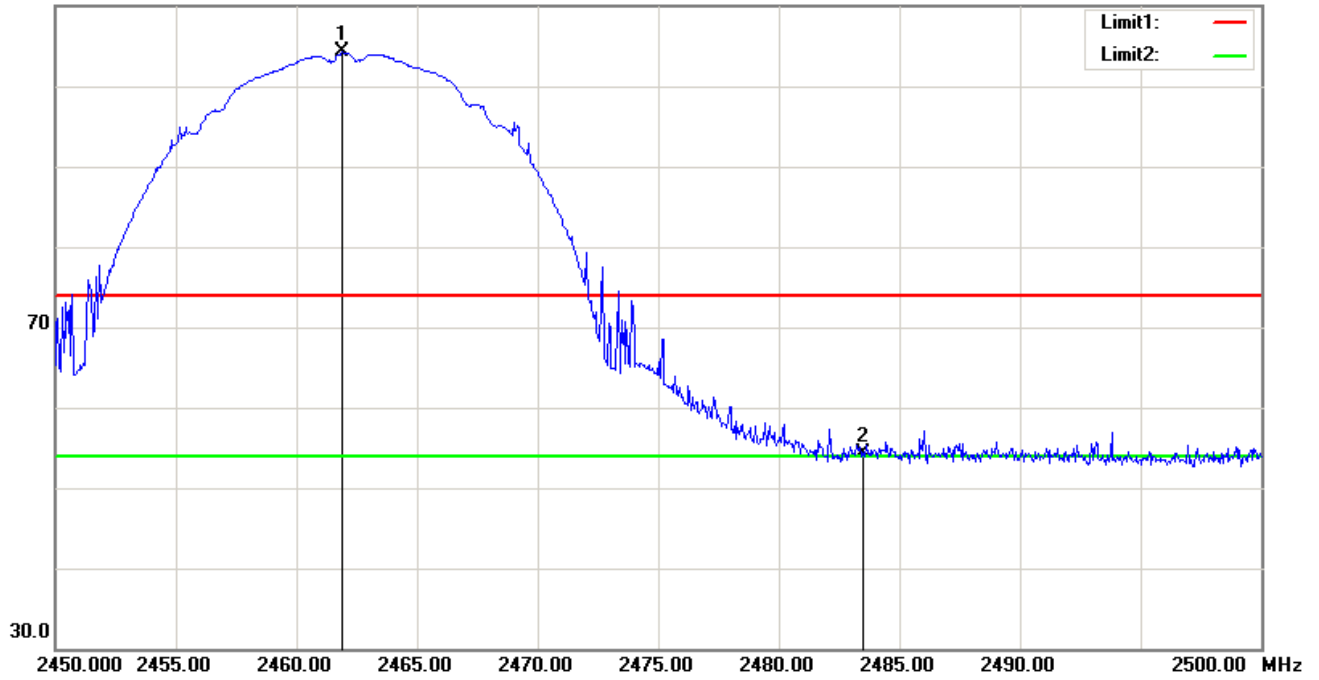

Detector mode: Average

Polarity: Vertical

110.0 dBuV/m

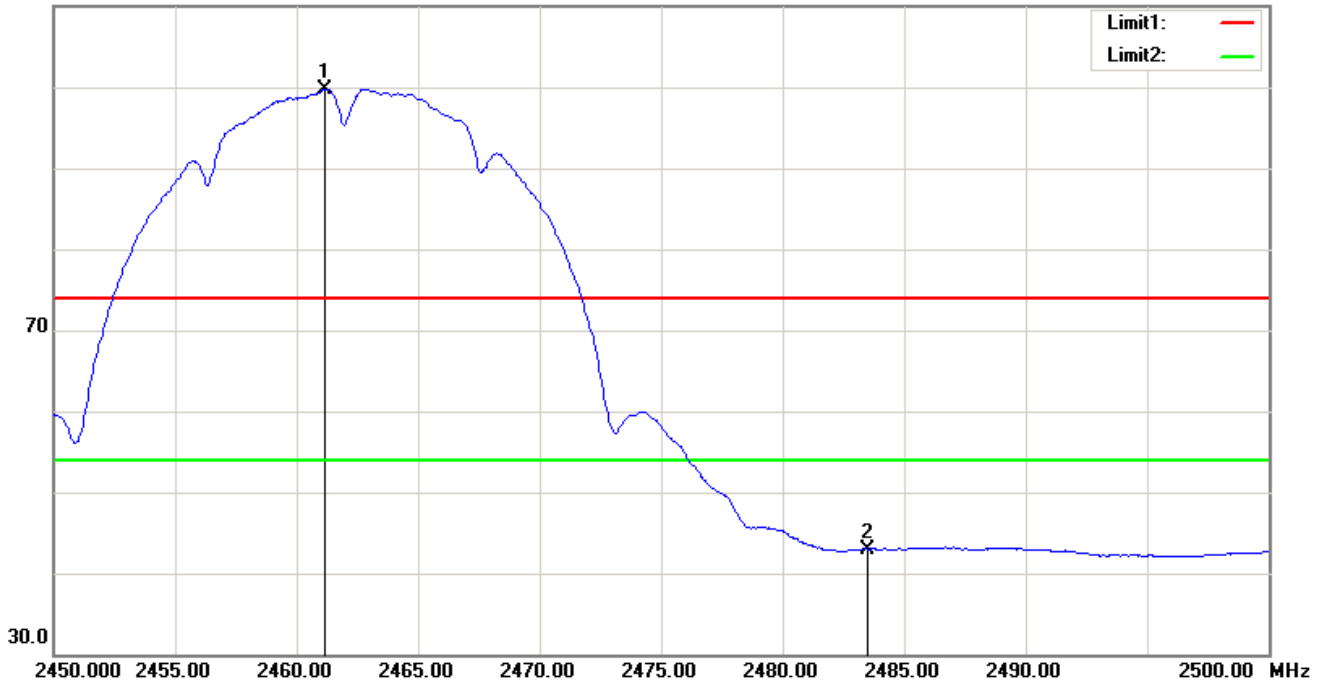


CH-High (CH11)

Detector mode: Peak

Polarity: Horizontal


110.0 dBuV/m

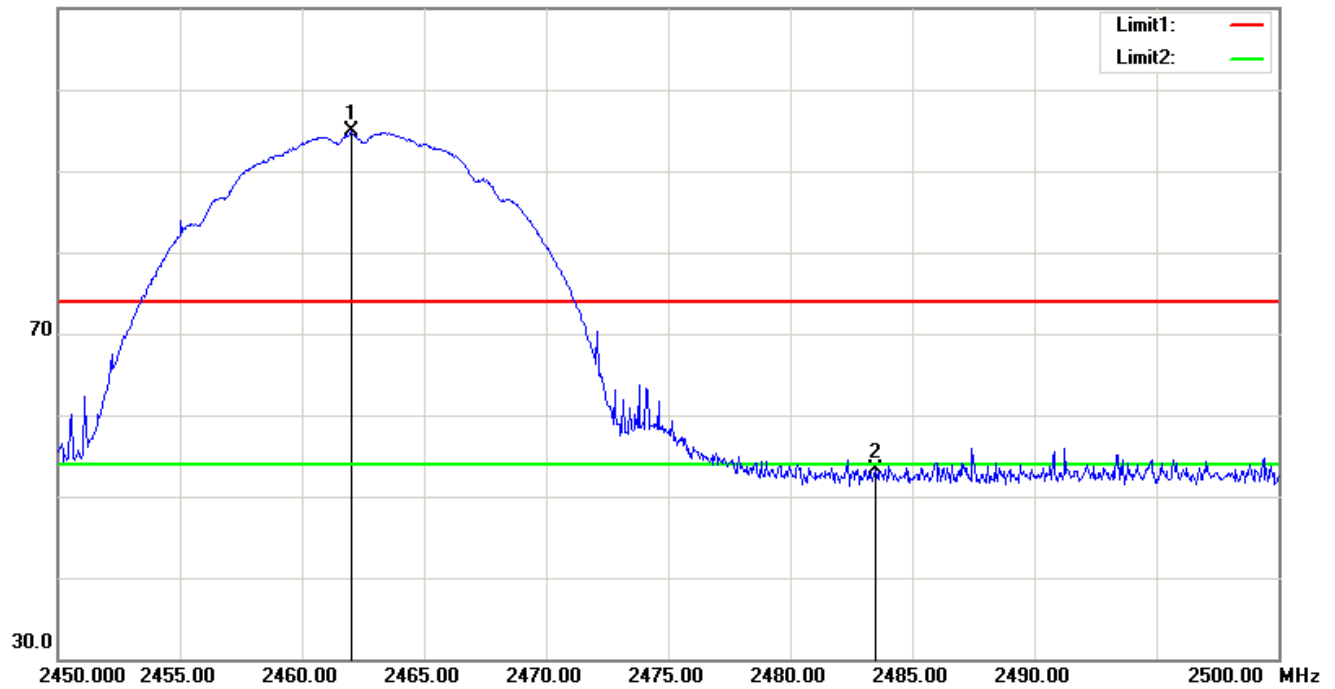

Detector mode: Average

Polarity: Horizontal

110.0 dBuV/m

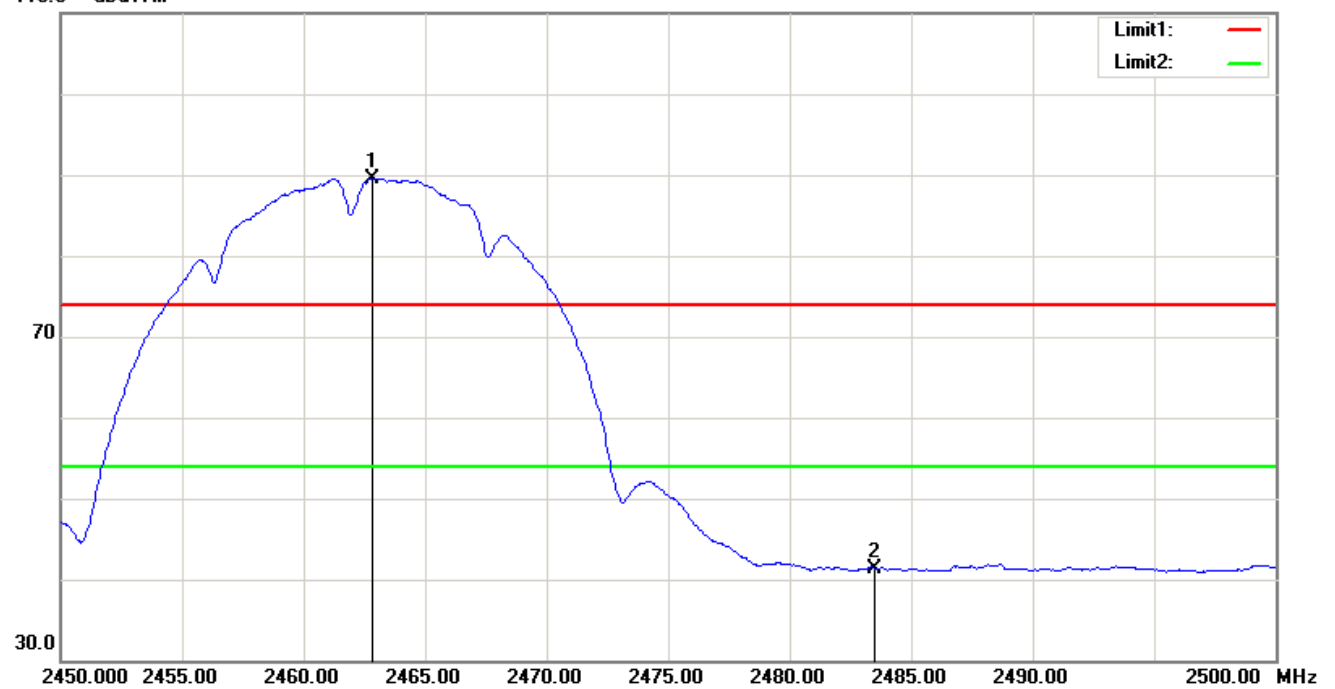

EUT :	液晶顯示器	Model Name :	LE65K6500U
Temperature :	24 °C	Relative Humidity :	51%
Pressure :	1010 hPa	Test Voltage :	AC 110/60Hz
Test Mode :	802.11g Data rate 6Mbps		
Note :	1. The transmitter was setup to transmit at the lowest channel (CH01). Then the field strength was measured at 2310-2390 MHz. 2. The transmitter was setup to transmit at the highest channel (CH11). Then the field strength was measured at 2483.5-2500 MHz. 3. The data of 2390MHz and 2483.5MHz was the worst.		

Freq. (MHz) (Peak)	Freq. (MHz) (AV)	Ant.Pol. H/V	Reading		Ant/CF		Act		Limit		Note
			Peak (dBuv)	AV (dBuv)	Peak (dB)	AV (dB)	Peak (dBuv/m)	AV (dBuv/m)	Peak (dBuv/m)	AV (dBuv/m)	
2390.000	2390.000	V	55.71	44.89	-2.86	-2.86	52.85	42.03	74.00	54.00	CH01
2416.080	2415.120	V	103.52	93.72	-2.72	-2.73	---	---	---	---	CH01
2390.000	2390.000	H	59.48	45.50	-2.86	-2.86	56.62	42.64	74.00	54.00	CH01
2408.280	2415.240	H	105.32	94.30	-2.76	-2.72	---	---	---	---	CH01
2467.950	2467.500	V	106.03	96.02	-2.44	-2.44	---	---	---	---	CH11
2483.500	2483.500	V	57.60	46.59	-2.35	-2.35	55.25	44.24	74.00	54.00	CH11
2465.450	2460.550	H	108.00	97.68	-2.45	-2.48	---	---	---	---	CH11
2483.500	2483.500	H	59.39	47.19	-2.35	-2.35	57.04	44.84	74.00	54.00	CH11


Remark :

- (1) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode
- (2) EUT Orthogonal Axis :
“X” - denotes Laid on Table ; ”Y” - denotes Vertical Stand ; ”Z” - denotes Side Stand
- (3) During the measurements above 1 GHz it is taken care of that the EUT is always within the 3 dB cone of radiation BW of the used antenna
- (4) Corr.Factor = Antenna Factor + Cable Loss – Pre-amplifier.

CH-Low (CH01)

Detector mode: Peak
110.0 dBuV/m


Polarity: Vertical

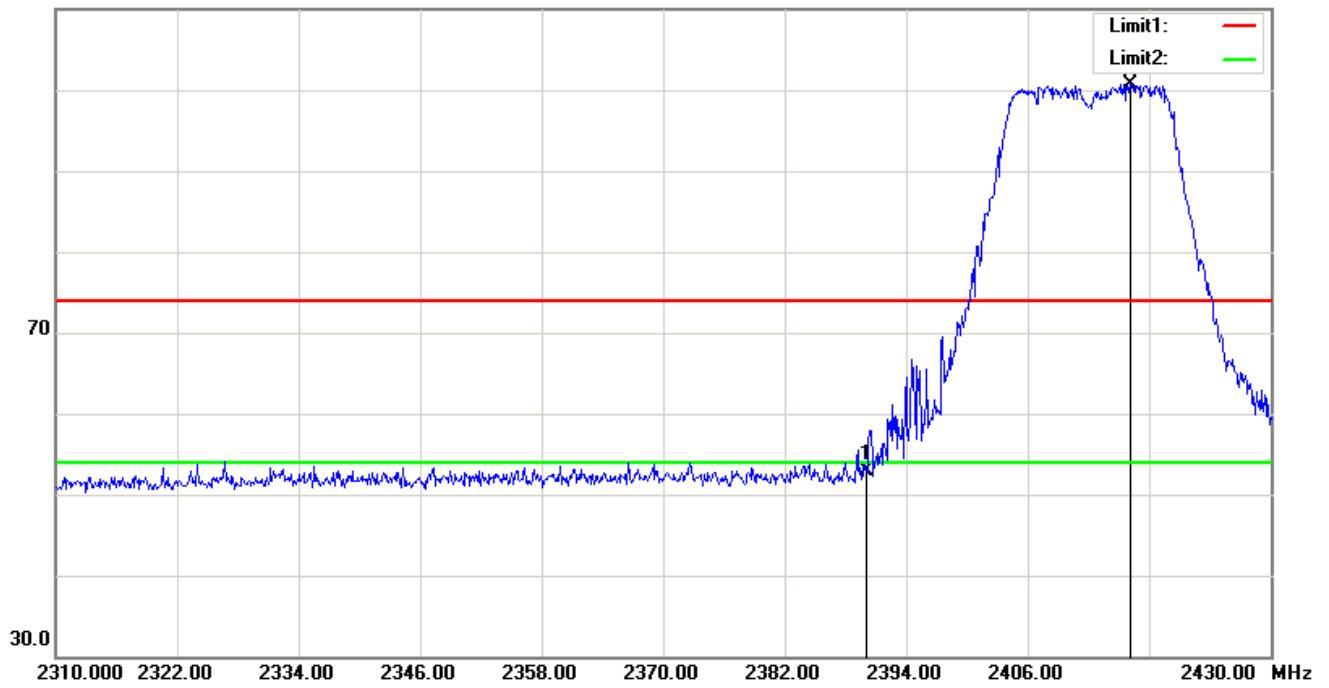

Detector mode: Average

110.0 dBuV/m


Polarity: Vertical

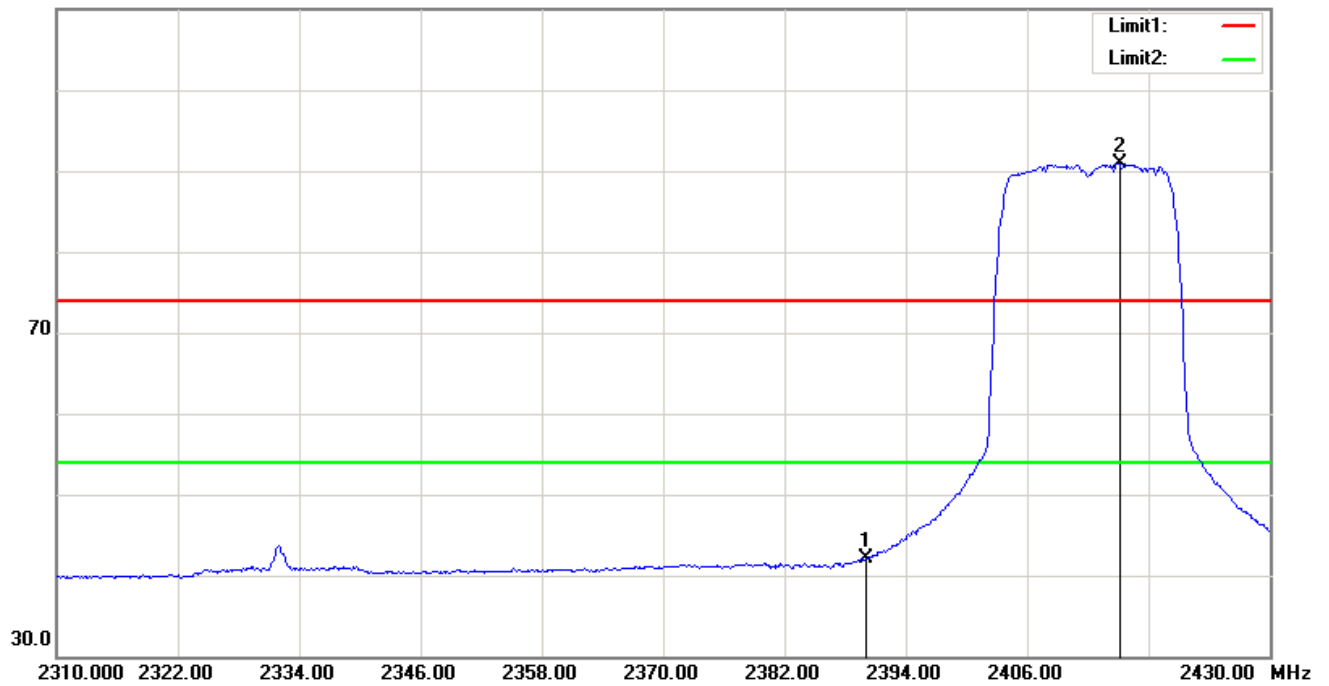

CH-Low (CH01)

Detector mode: Peak
110.0 dBuV/m


Polarity: Horizontal

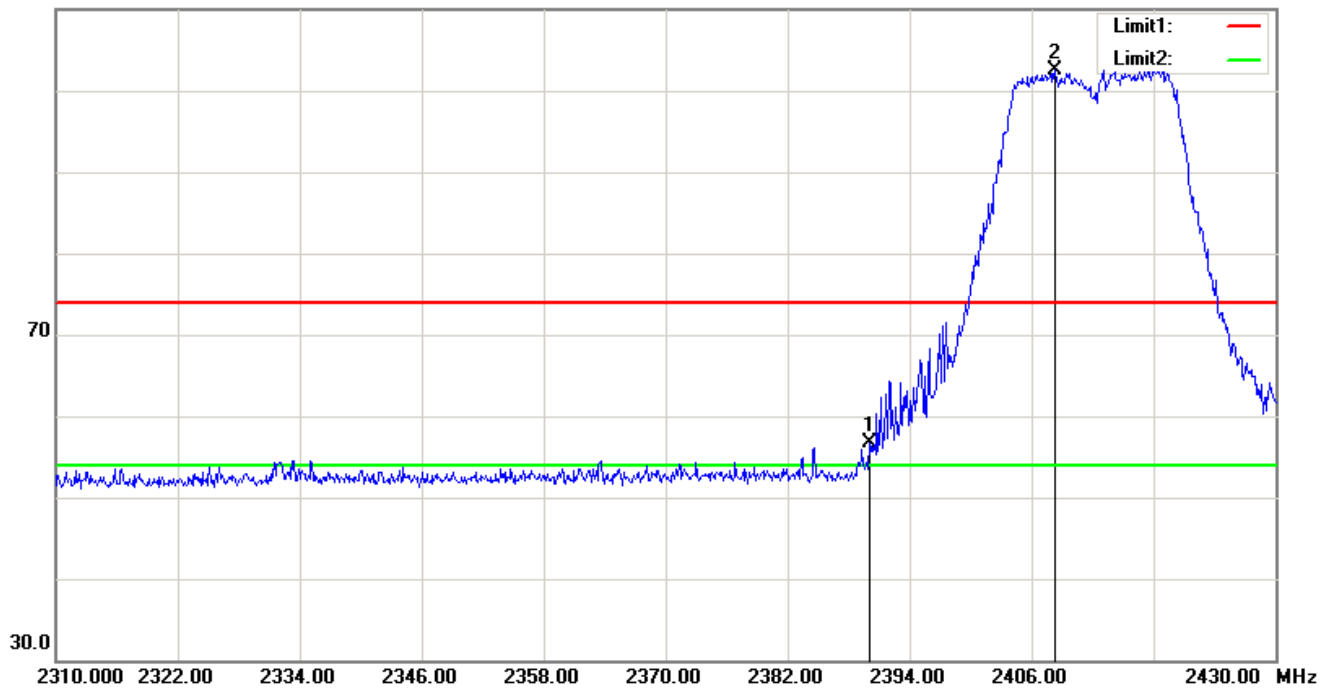

Detector mode: Average

110.0 dBuV/m

Polarity: Horizontal

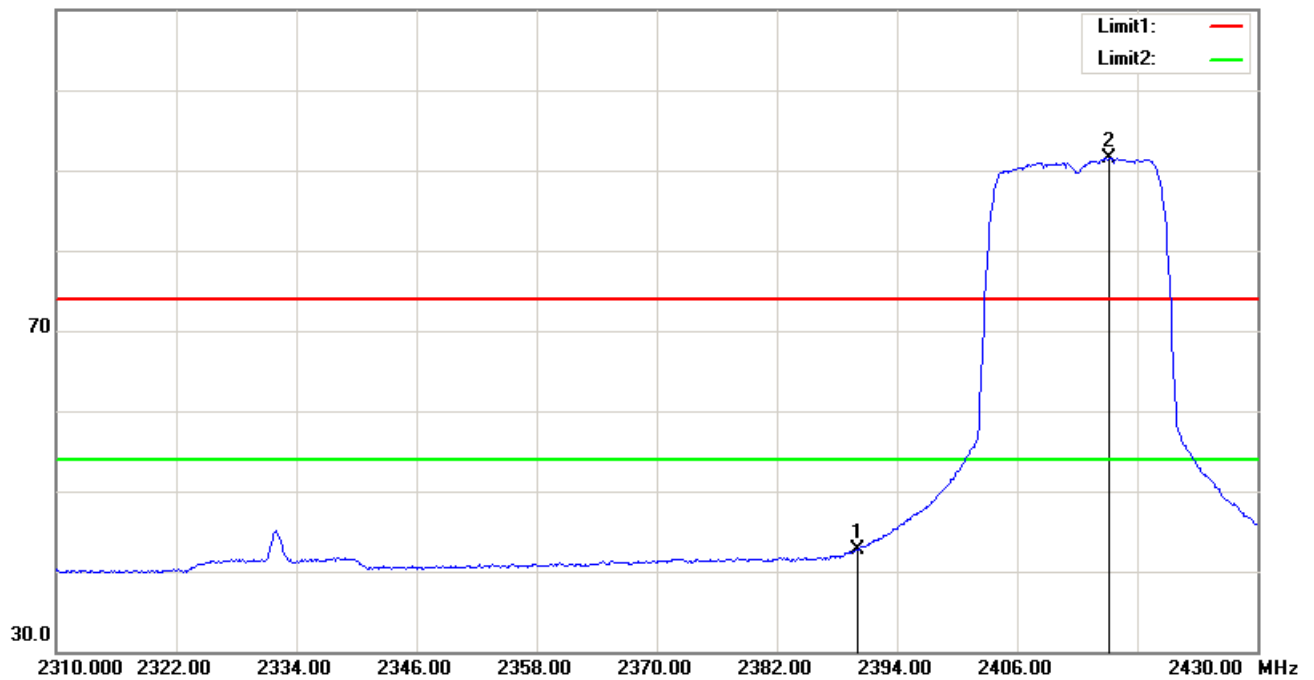


CH-High (CH11)

Detector mode: Peak

Polarity: Vertical


110.0 dBuV/m

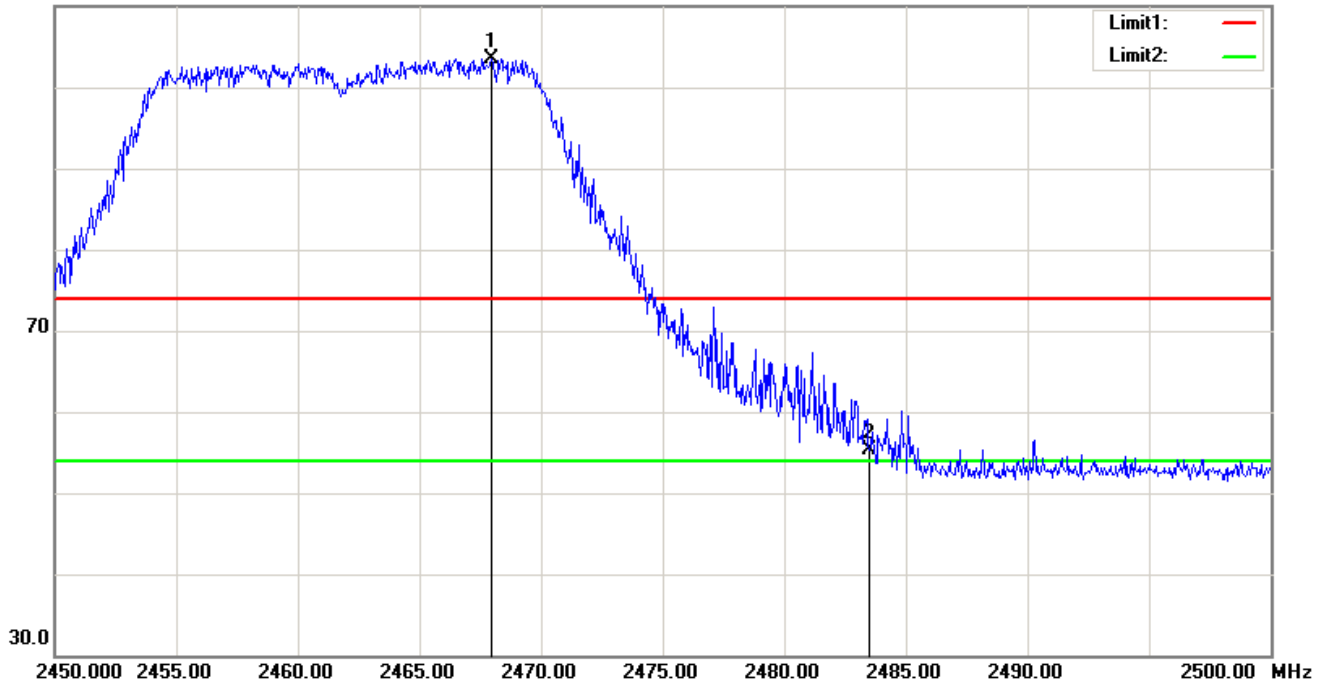

Detector mode: Average

Polarity: Vertical

110.0 dBuV/m

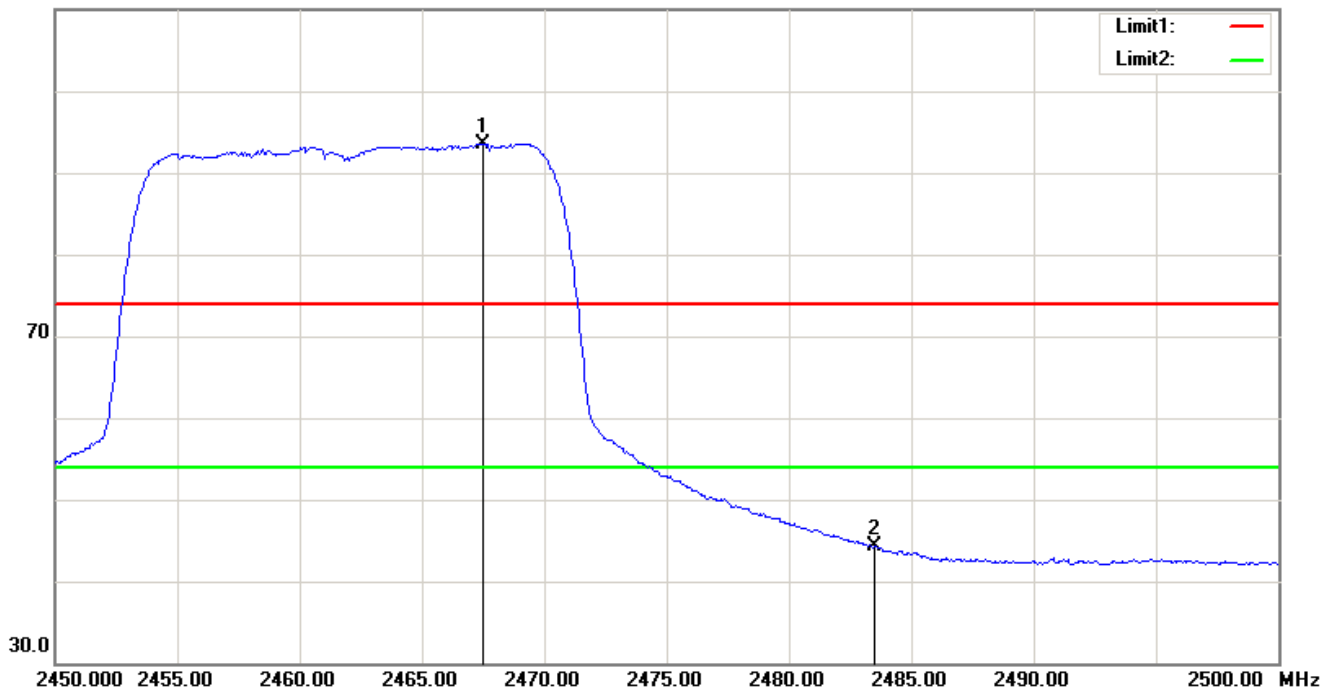


CH-High (CH11)

Detector mode: Peak

Polarity: Horizontal


110.0 dBuV/m

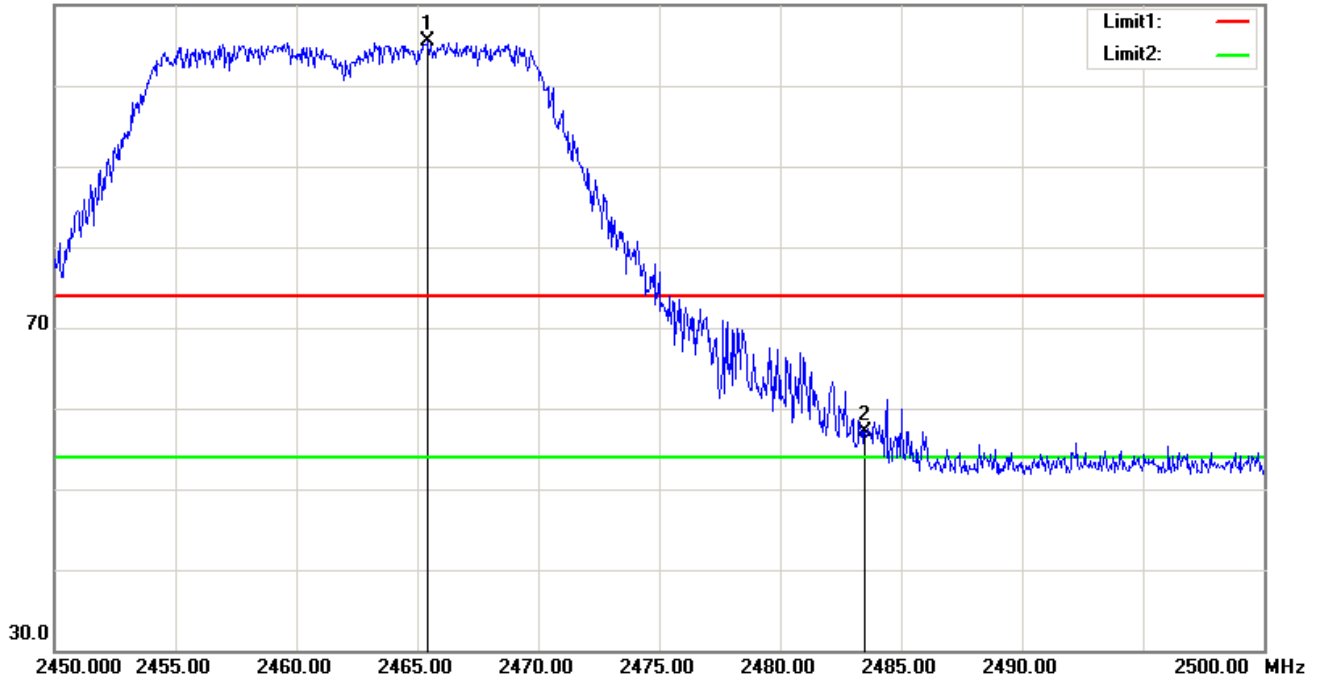

Detector mode: Average

Polarity: Horizontal

110.0 dBuV/m

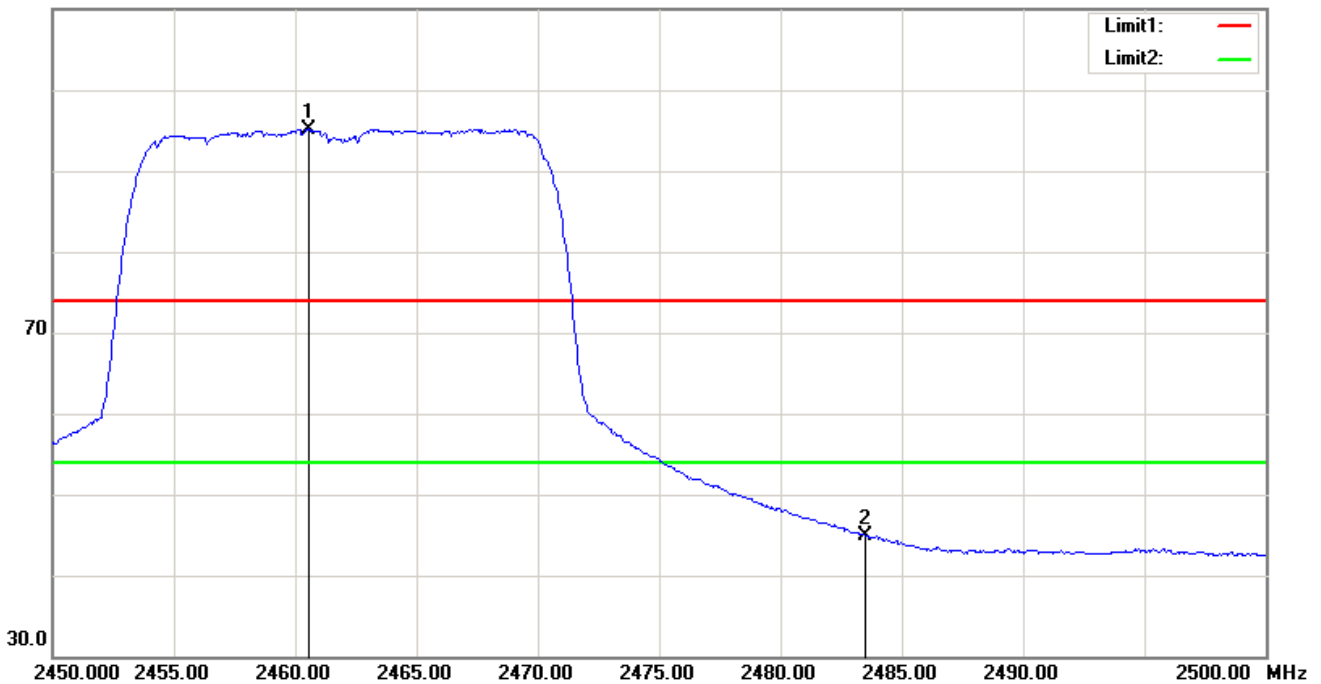

EUT :	液晶顯示器	Model Name :	LE65K6500U
Temperature :	24 °C	Relative Humidity :	51%
Pressure :	1010 hPa	Test Voltage :	AC 110/60Hz
Test Mode :	802.11n20 Data rate 6.5Mbps		
Note :	1. The transmitter was setup to transmit at the lowest channel (CH01). Then the field strength was measured at 2310-2390 MHz. 2. The transmitter was setup to transmit at the highest channel (CH11). Then the field strength was measured at 2483.5-2500 MHz. 3. The data of 2390MHz and 2483.5MHz was the worst.		

Freq. (MHz) (Peak)	Freq. (MHz) (AV)	Ant.Pol. H/V	Reading		Ant/CF		Act		Limit		Note
			Peak (dBuv)	AV (dBuv)	Peak (dB)	AV (dB)	Peak (dBuv/m)	AV (dBuv/m)	Peak (dBuv/m)	AV (dBuv/m)	
2390.000	2390.000	V	56.36	44.39	-2.86	-2.86	53.50	41.53	74.00	54.00	CH01
2415.840	2418.840	V	101.95	91.20	-2.72	-2.70	---	---	---	---	CH01
2390.000	2390.000	H	60.85	45.81	-2.86	-2.86	57.99	42.95	74.00	54.00	CH01
2407.920	2409.120	H	105.07	94.59	-2.76	-2.76	---	---	---	---	CH01
2466.500	2468.100	V	104.67	94.86	-2.44	-2.43	---	---	---	---	CH11
2483.500	2483.500	V	56.58	46.70	-2.35	-2.35	54.23	44.35	74.00	54.00	CH11
2466.150	2467.850	H	106.82	96.94	-2.45	-2.44	---	---	---	---	CH11
2483.500	2483.500	H	66.38	47.32	-2.35	-2.35	64.03	44.97	74.00	54.00	CH11


Remark :

- (1) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode
- (2) EUT Orthogonal Axis :
“X” - denotes Laid on Table ; ”Y” - denotes Vertical Stand ; ”Z” - denotes Side Stand
- (3) During the measurements above 1 GHz it is taken care of that the EUT is always within the 3 dB cone of radiation BW of the used antenna
- (4) Corr.Factor = Antenna Factor + Cable Loss – Pre-amplifier.

CH-Low (CH01)

Detector mode: Peak
110.0 dBuV/m


Polarity: Vertical

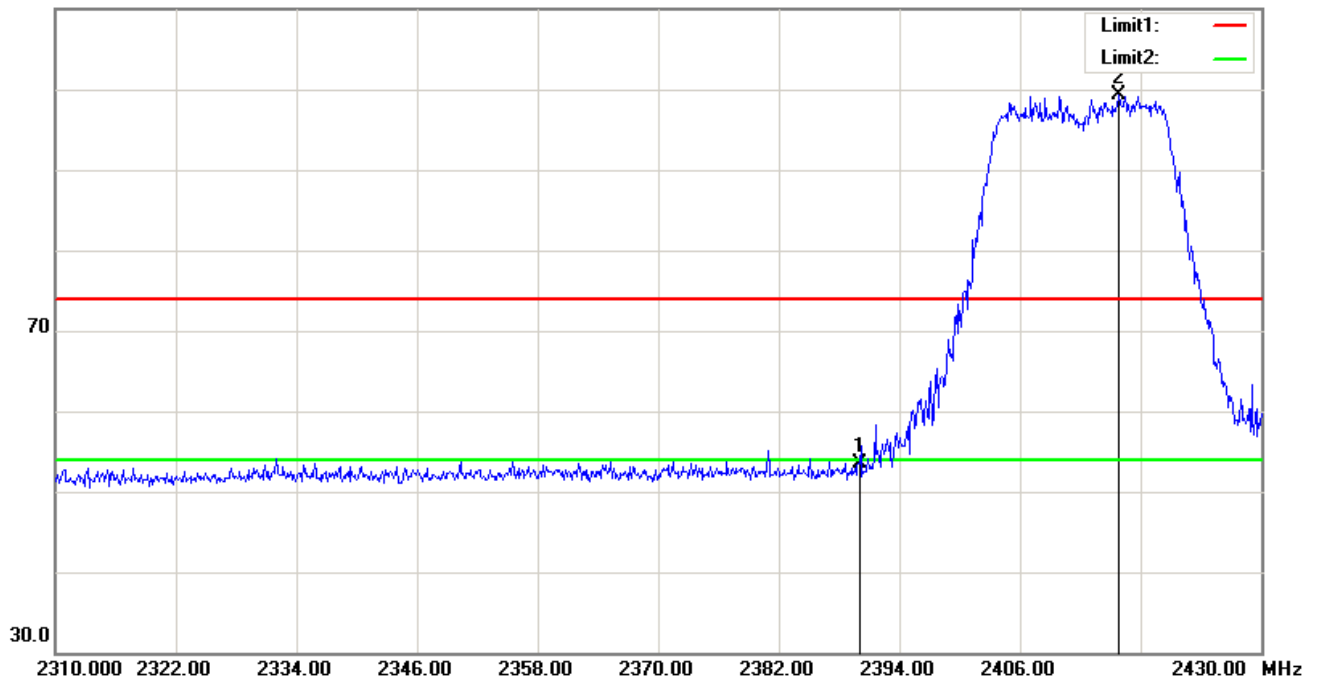

Detector mode: Average

110.0 dBuV/m


Polarity: Vertical

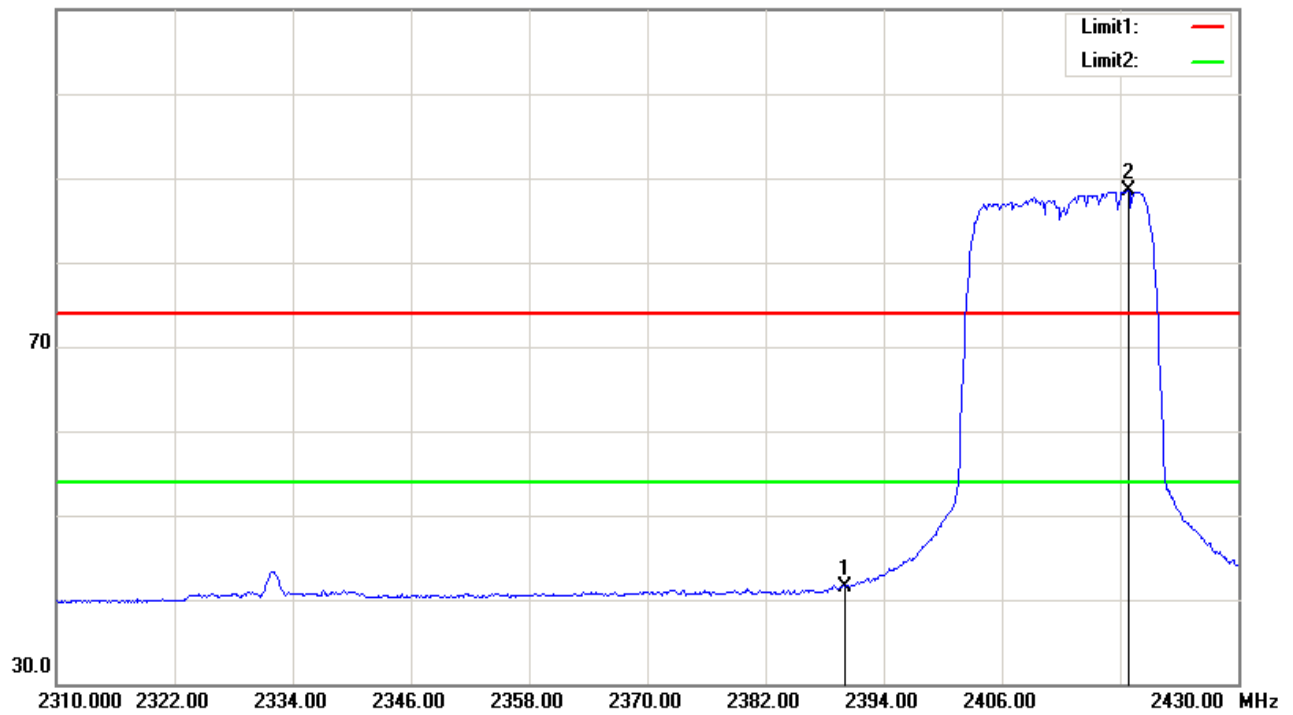

CH-Low (CH01)


Detector mode: Peak
110.0 dBuV/m

Polarity: Horizontal

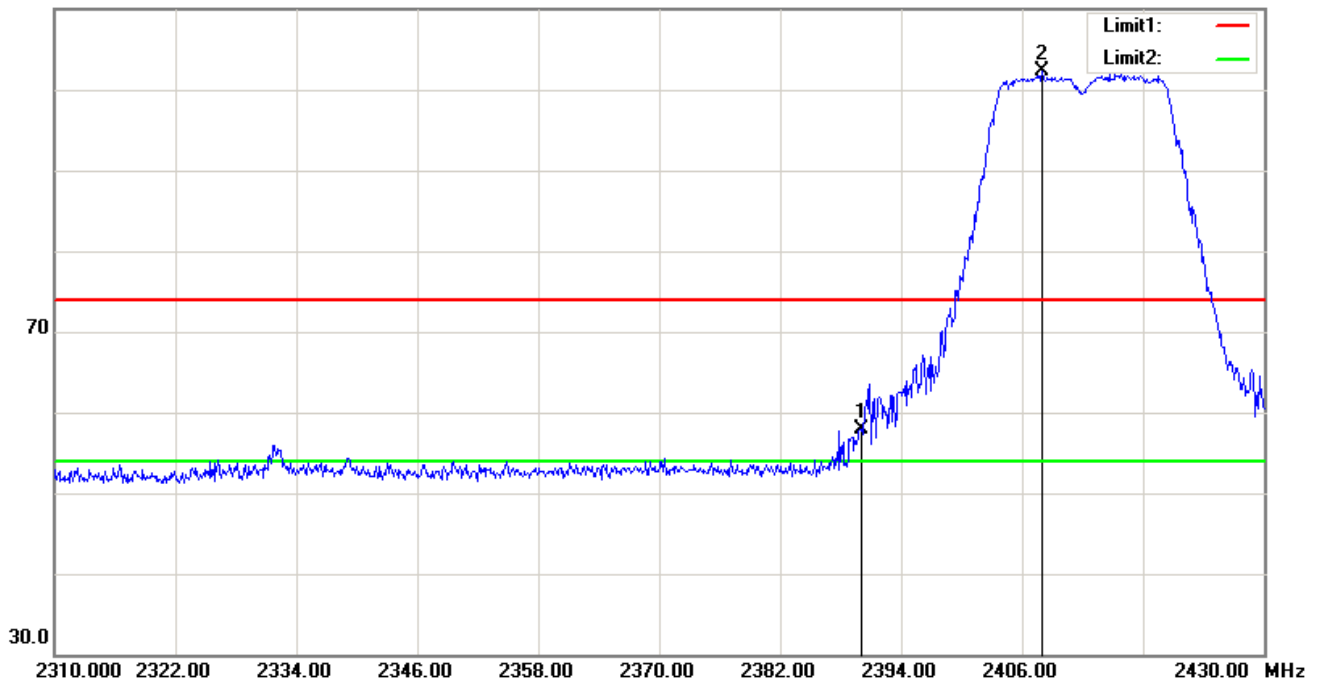

Detector mode: Average

Polarity: Horizontal

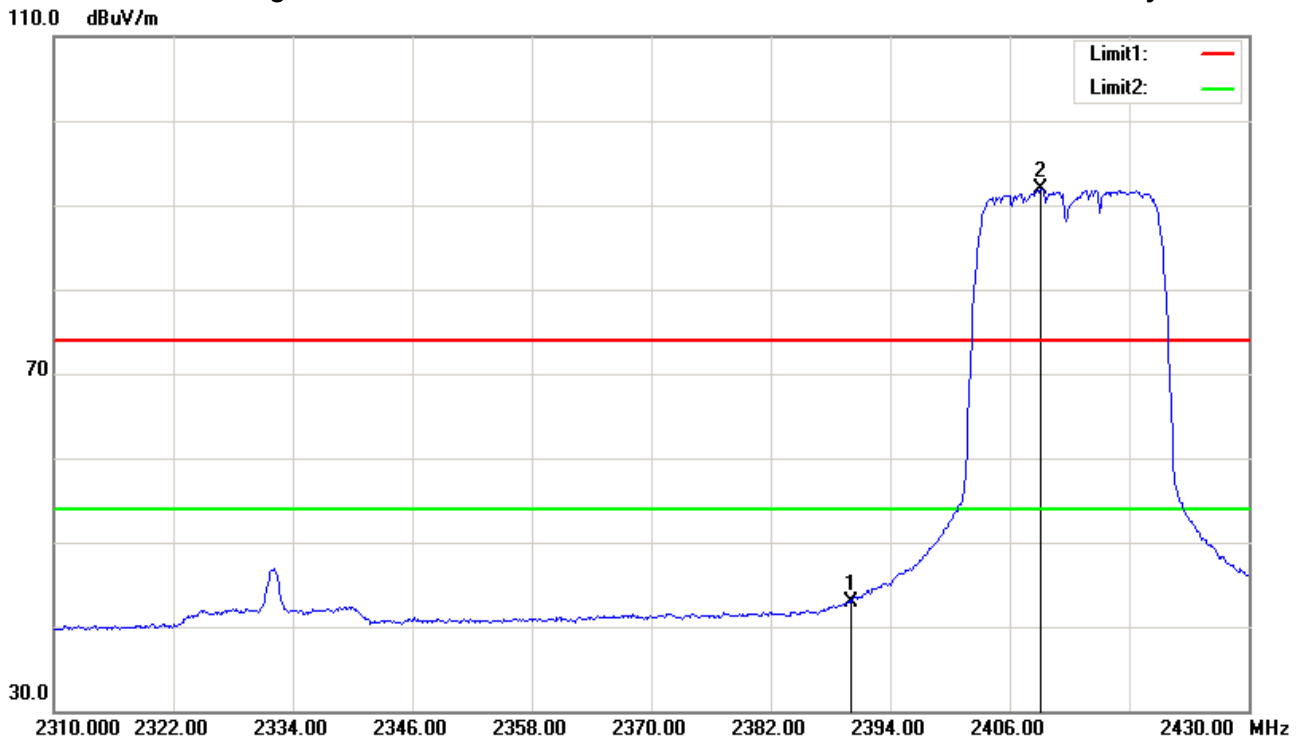


CH-High (CH11)

Detector mode: Peak

Polarity: Vertical


110.0 dBuV/m

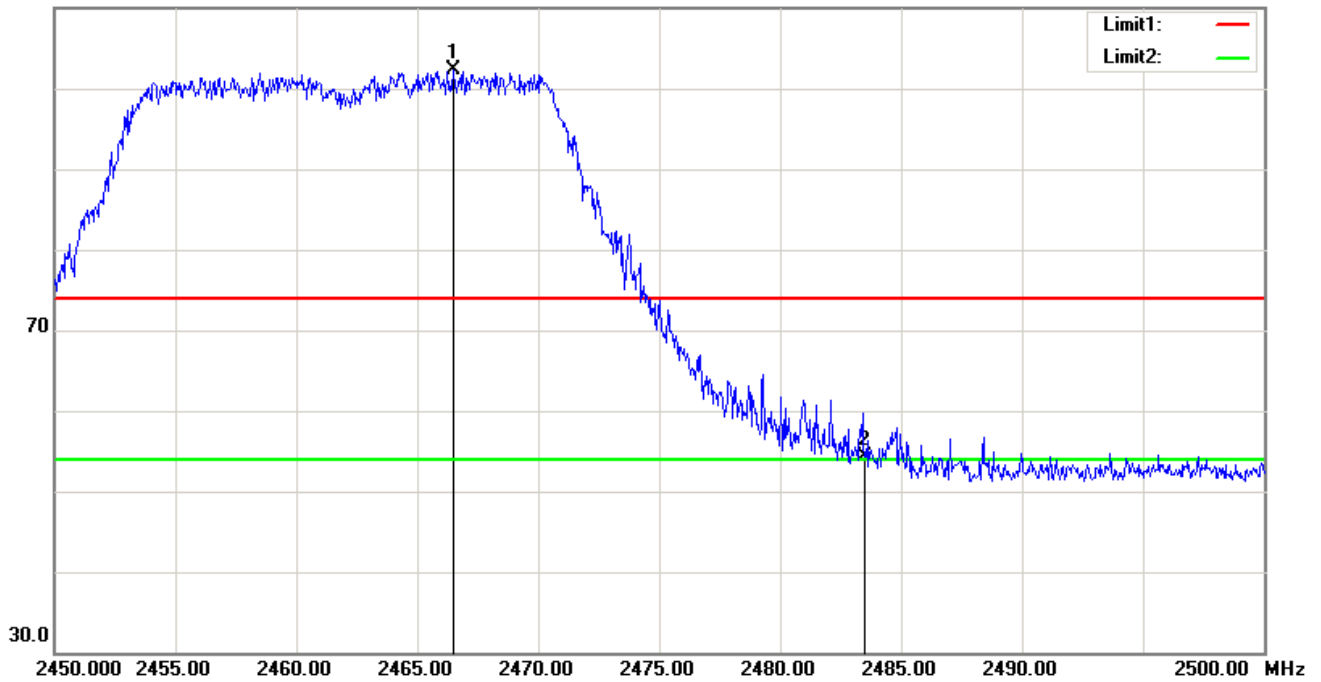

Detector mode: Average

Polarity: Vertical

110.0 dBuV/m

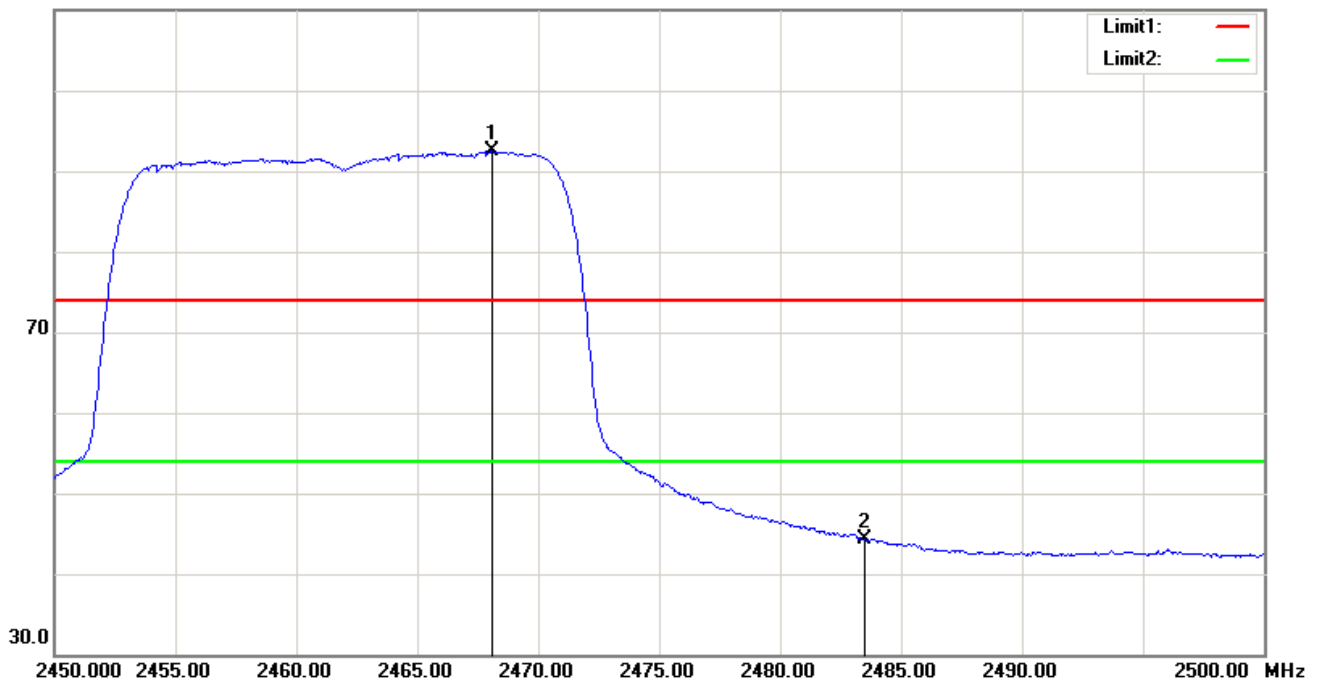


CH-High (CH11)

Detector mode: Peak

Polarity: Horizontal


110.0 dBuV/m

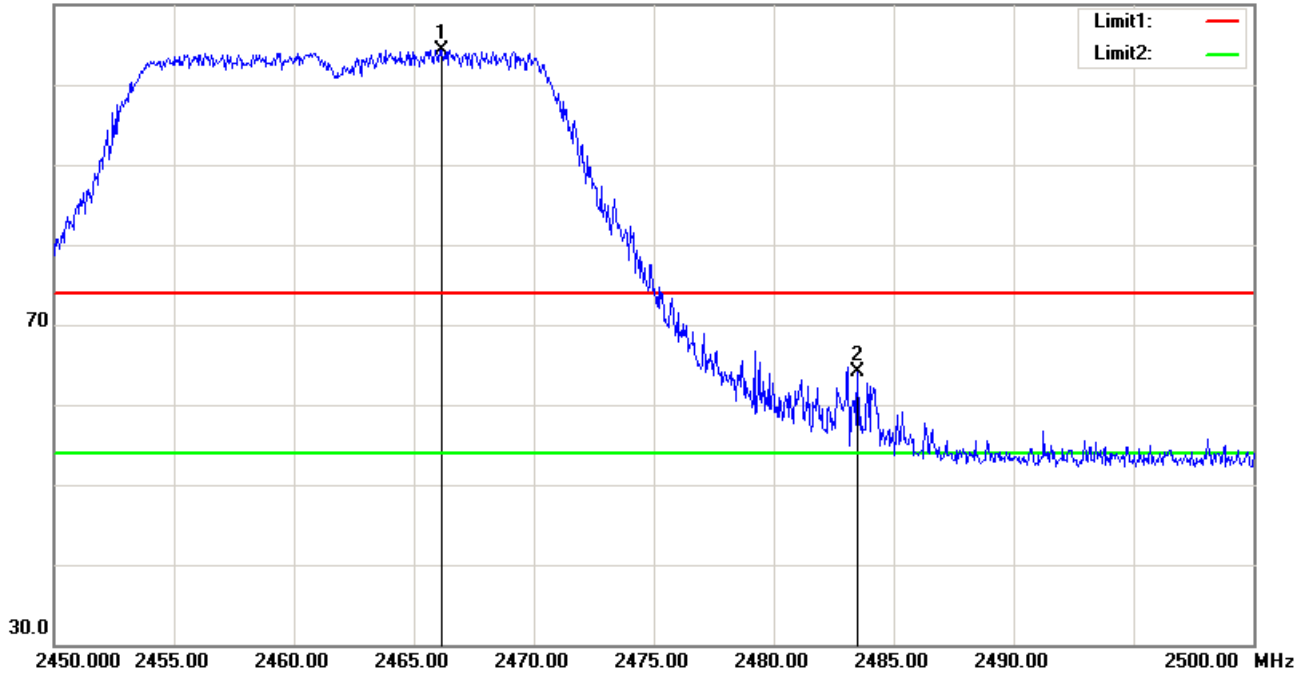

Detector mode: Average

Polarity: Horizontal

110.0 dBuV/m

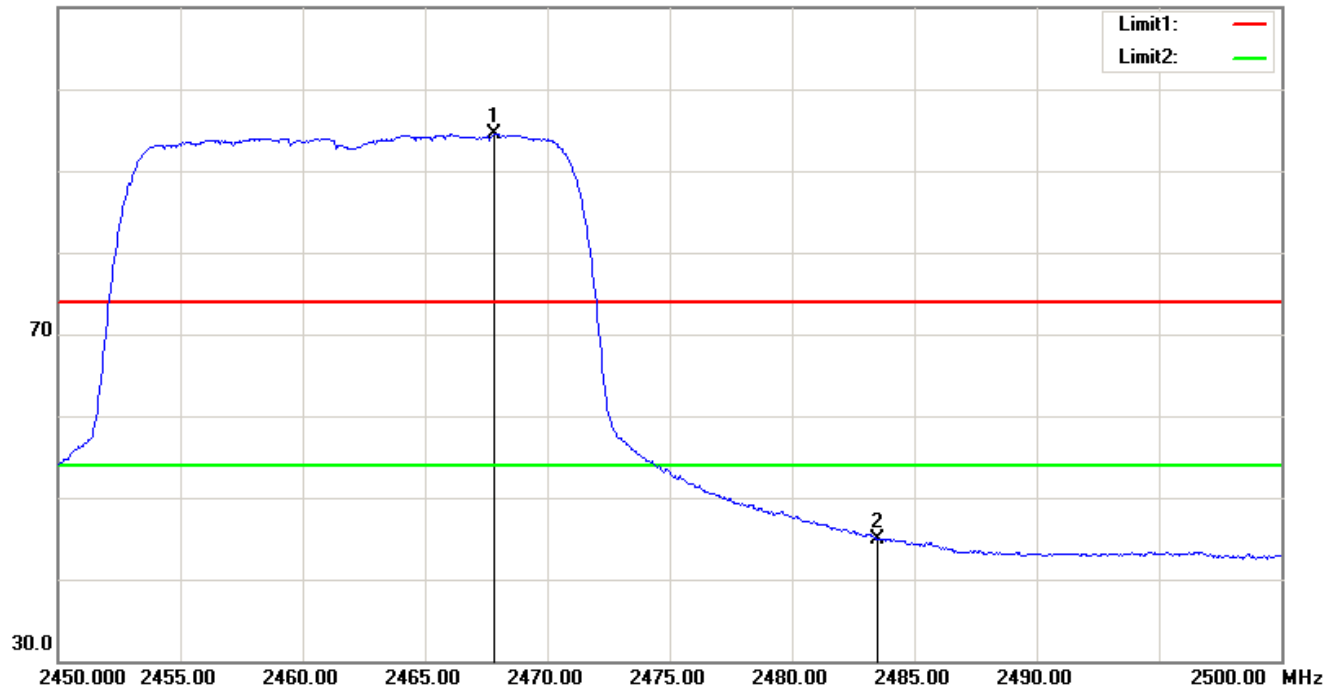

EUT :	液晶顯示器	Model Name :	LE65K6500U
Temperature :	24 °C	Relative Humidity :	51%
Pressure :	1010 hPa	Test Voltage :	AC 110/60Hz
Test Mode :	802.11n40 Data rate 13.5Mbps		
Note :	1. The transmitter was setup to transmit at the lowest channel (CH03). Then the field strength was measured at 2310-2390 MHz. 2. The transmitter was setup to transmit at the highest channel (CH09). Then the field strength was measured at 2483.5-2500 MHz. 3. The data of 2390MHz and 2483.5MHz was the worst.		

Freq. (MHz) (Peak)	Freq. (MHz) (AV)	Ant.Pol. H/V	Reading		Ant/CF		Act		Limit		Note
			Peak (dBuv)	AV (dBuv)	Peak (dB)	AV (dB)	Peak (dBuv/m)	AV (dBuv/m)	Peak (dBuv/m)	AV (dBuv/m)	
2390.000	2390.000	V	54.74	44.93	-2.86	-2.86	51.88	42.07	74.00	54.00	CH03
2431.380	2431.520	V	99.32	89.25	-2.64	-2.64	---	---	---	---	CH03
2390.000	2390.000	H	56.56	46.90	-2.86	-2.86	53.70	44.09	74.00	54.00	CH03
2430.400	2431.520	H	101.66	92.02	-2.64	-2.64	---	---	---	---	CH03
2458.070	2456.600	V	101.32	90.51	-2.49	-2.50	---	---	---	---	CH09
2483.500	2483.500	V	57.33	46.61	-2.35	-2.35	54.98	44.26	74.00	54.00	CH09
2458.560	2445.190	H	103.63	92.79	-2.49	-2.56	---	---	---	---	CH09
2483.500	2483.500	H	57.29	48.06	-2.35	-2.35	54.94	45.71	74.00	54.00	CH09


Remark :

- (1) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode
- (2) EUT Orthogonal Axis :
"X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand
- (3) During the measurements above 1 GHz it is taken care of that the EUT is always within the 3 dB cone of radiation BW of the used antenna
- (4) Corr.Factor = Antenna Factor + Cable Loss – Pre-amplifier.

CH-Low (CH03)

Detector mode: Peak
110.0 dBuV/m


Polarity: Vertical

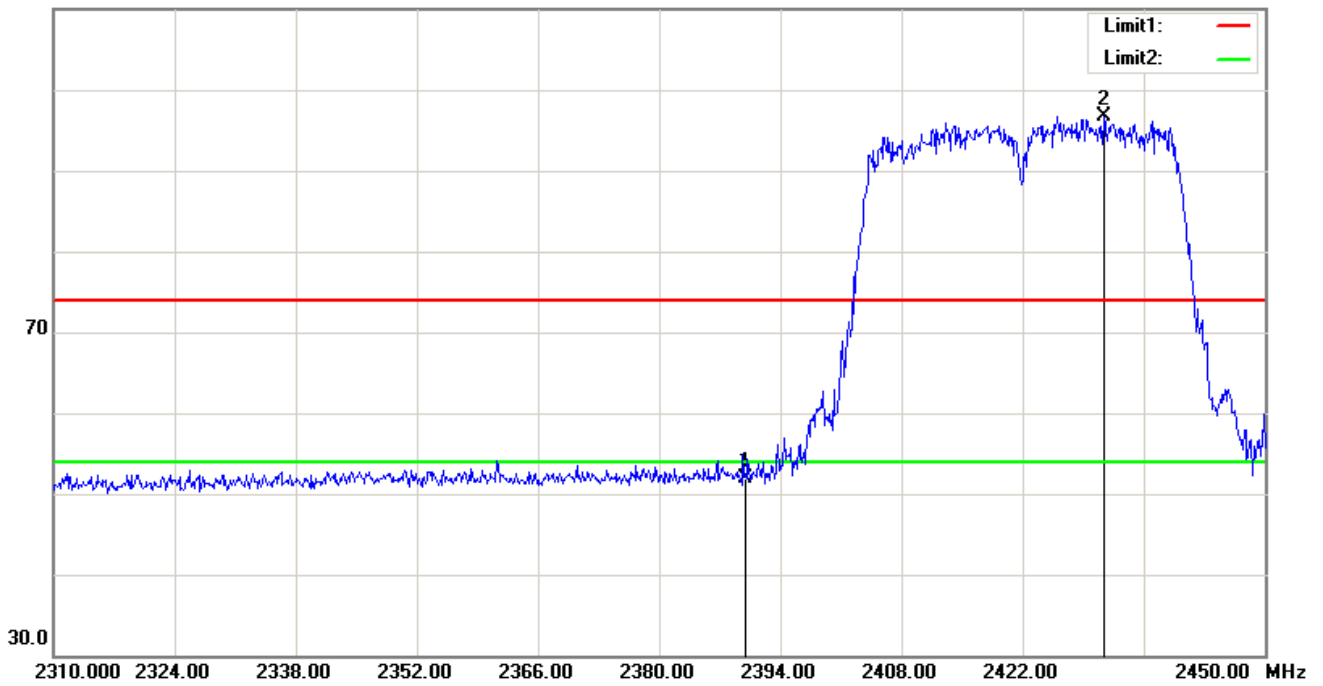

Detector mode: Average

110.0 dBuV/m


Polarity: Vertical

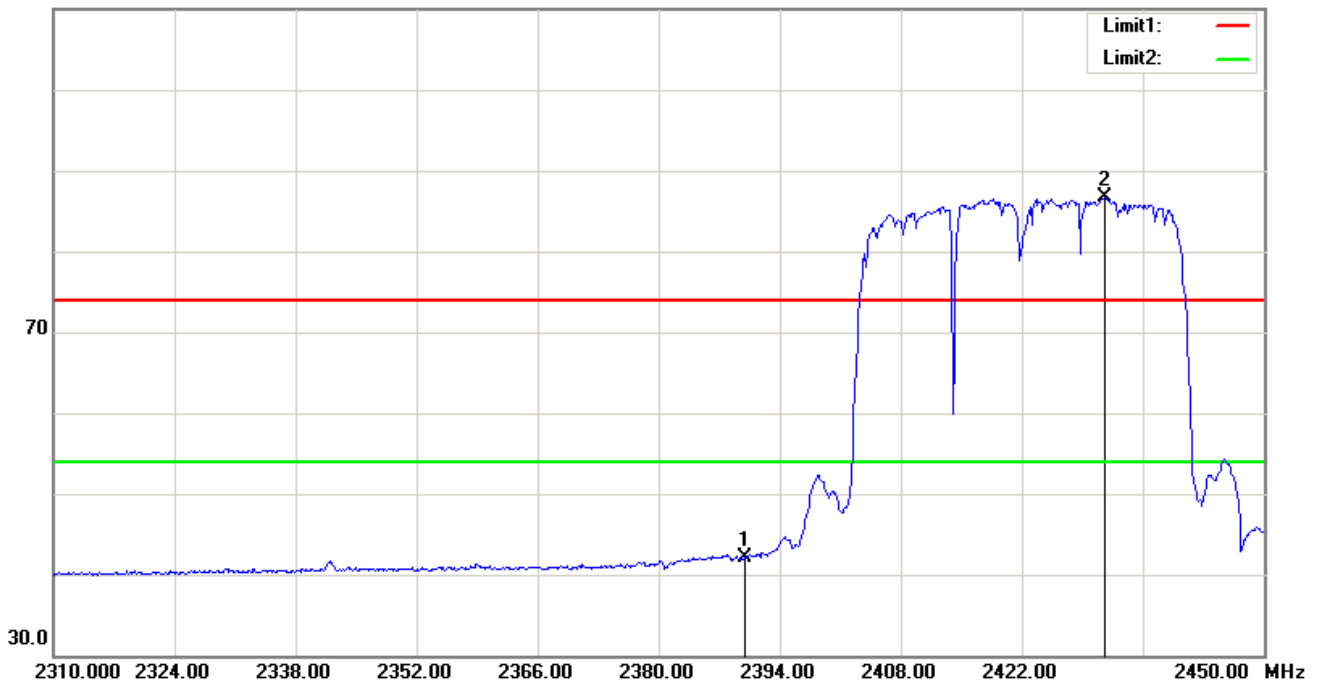

CH-Low (CH03)

Detector mode: Peak
110.0 dBuV/m


Polarity: Horizontal

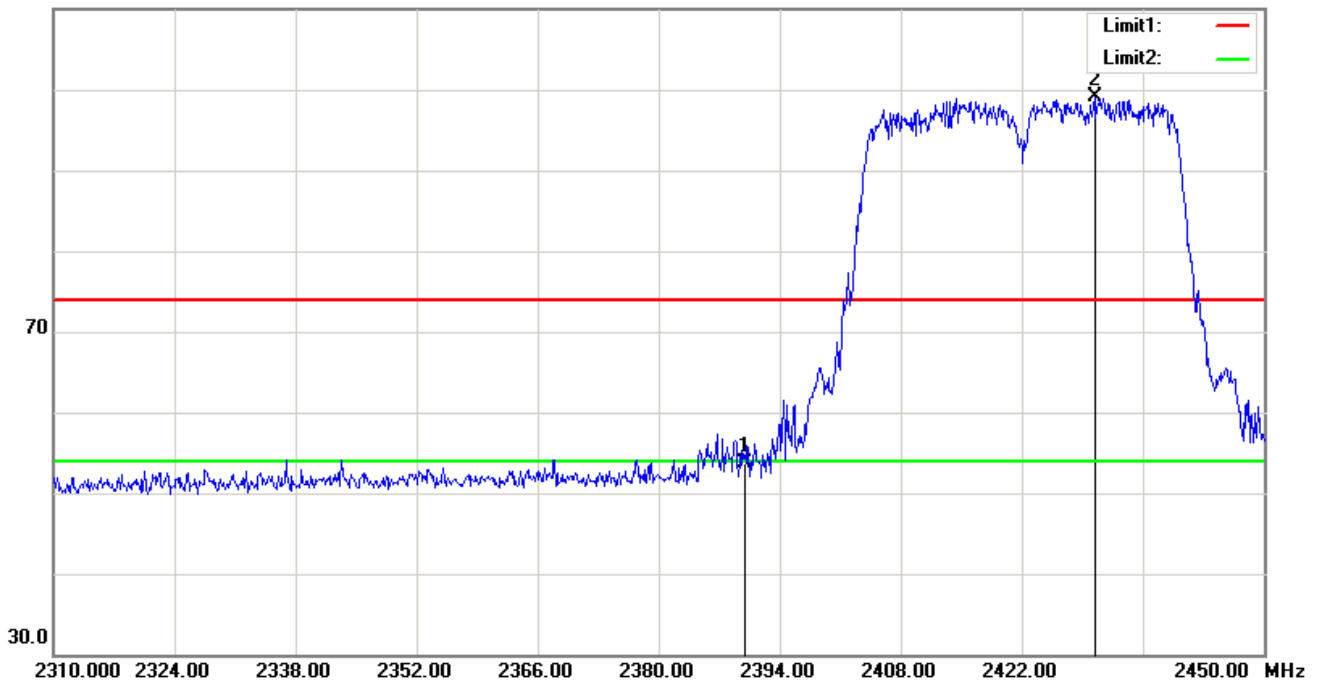

Detector mode: Average

110.0 dBuV/m

Polarity: Horizontal

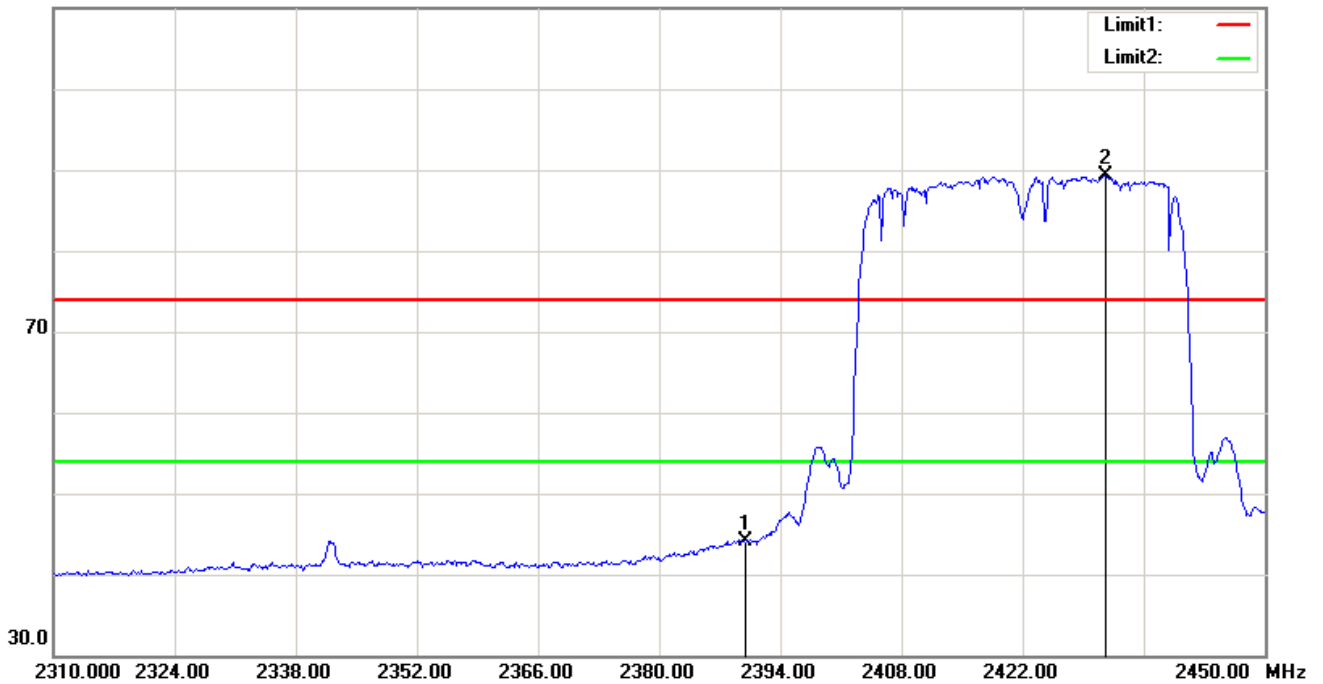


CH-High (CH09)

Detector mode: Peak

Polarity: Vertical


110.0 dBuV/m

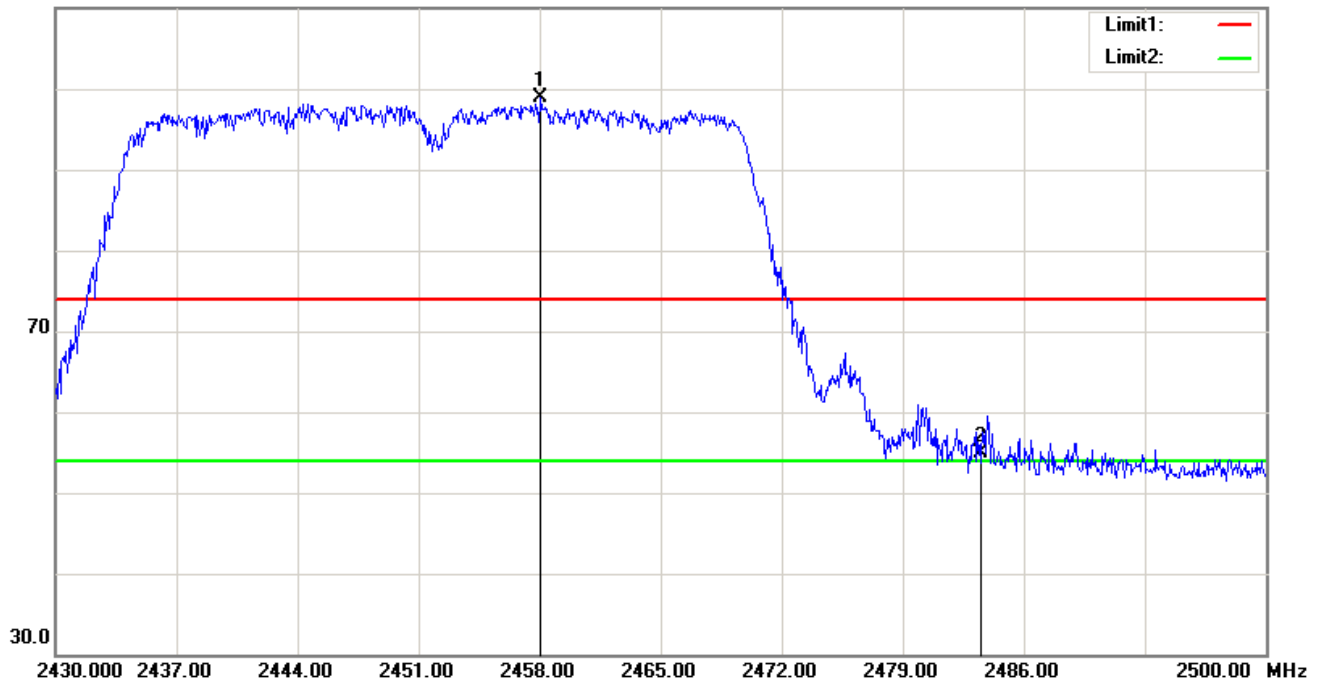

Detector mode: Average

Polarity: Vertical

110.0 dBuV/m

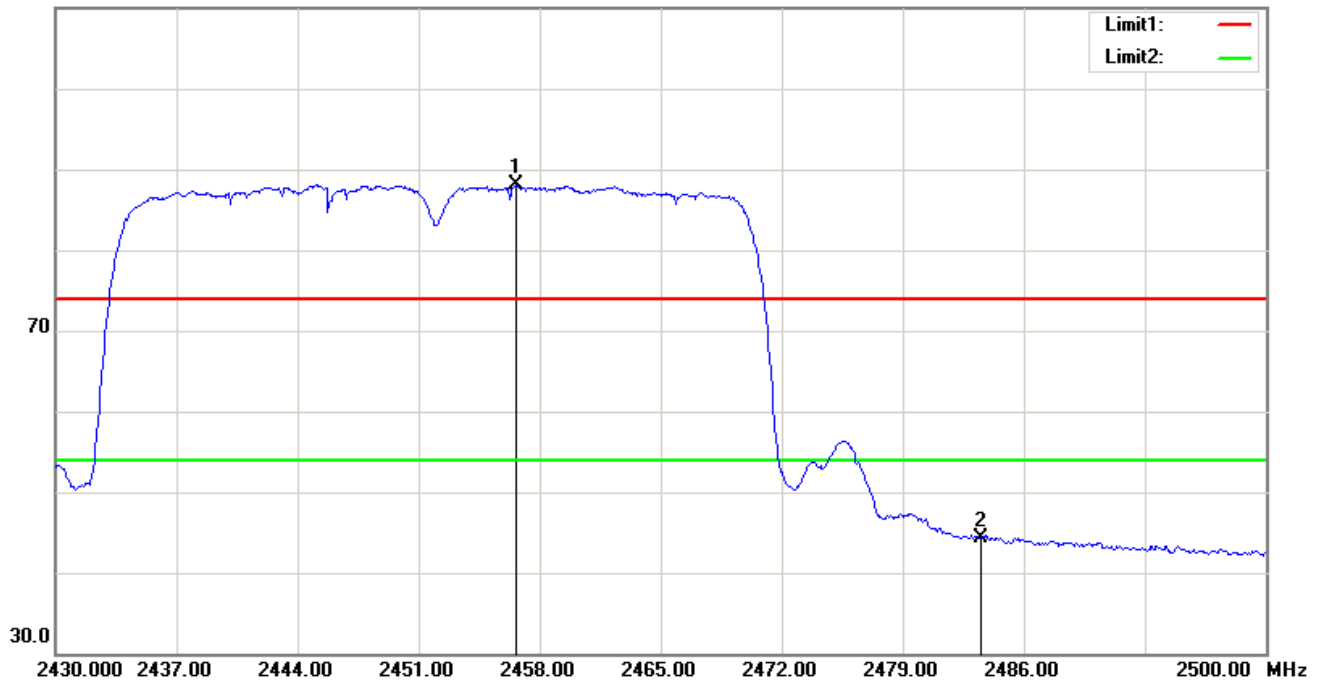


CH-High (CH09)

Detector mode: Peak

Polarity: Horizontal


110.0 dBuV/m

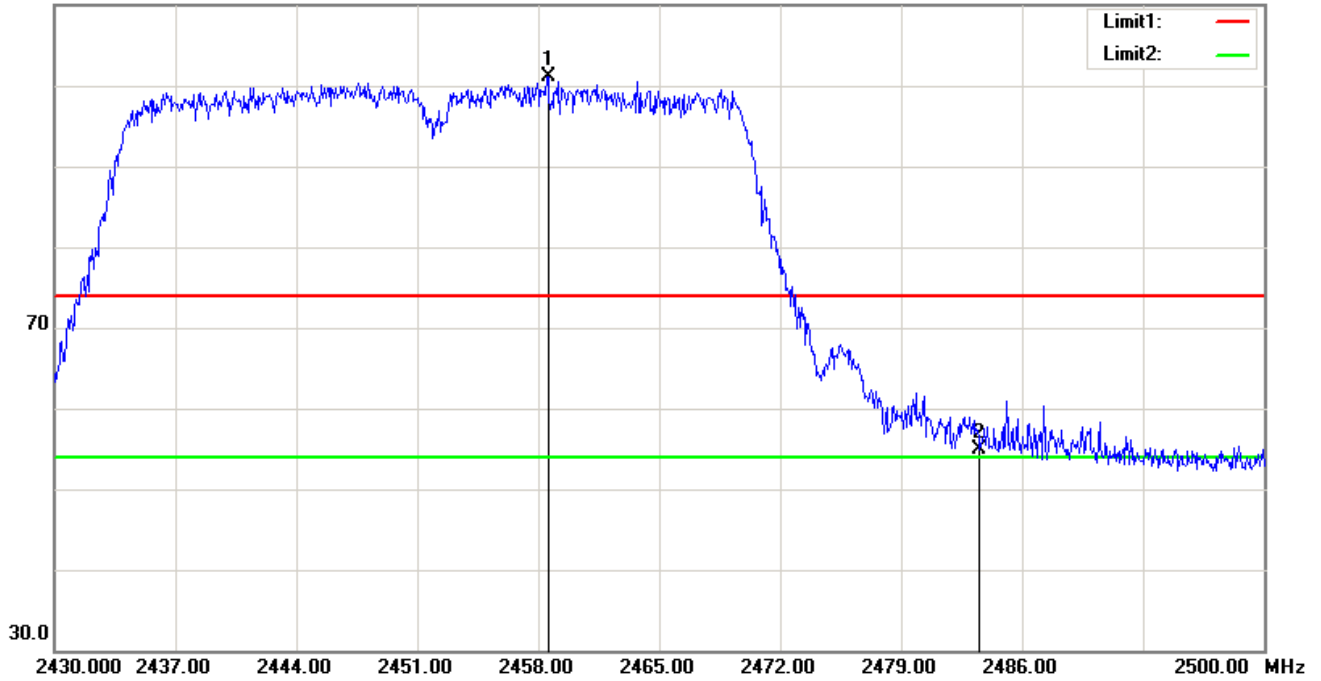

Detector mode: Average

Polarity: Horizontal

110.0 dBuV/m

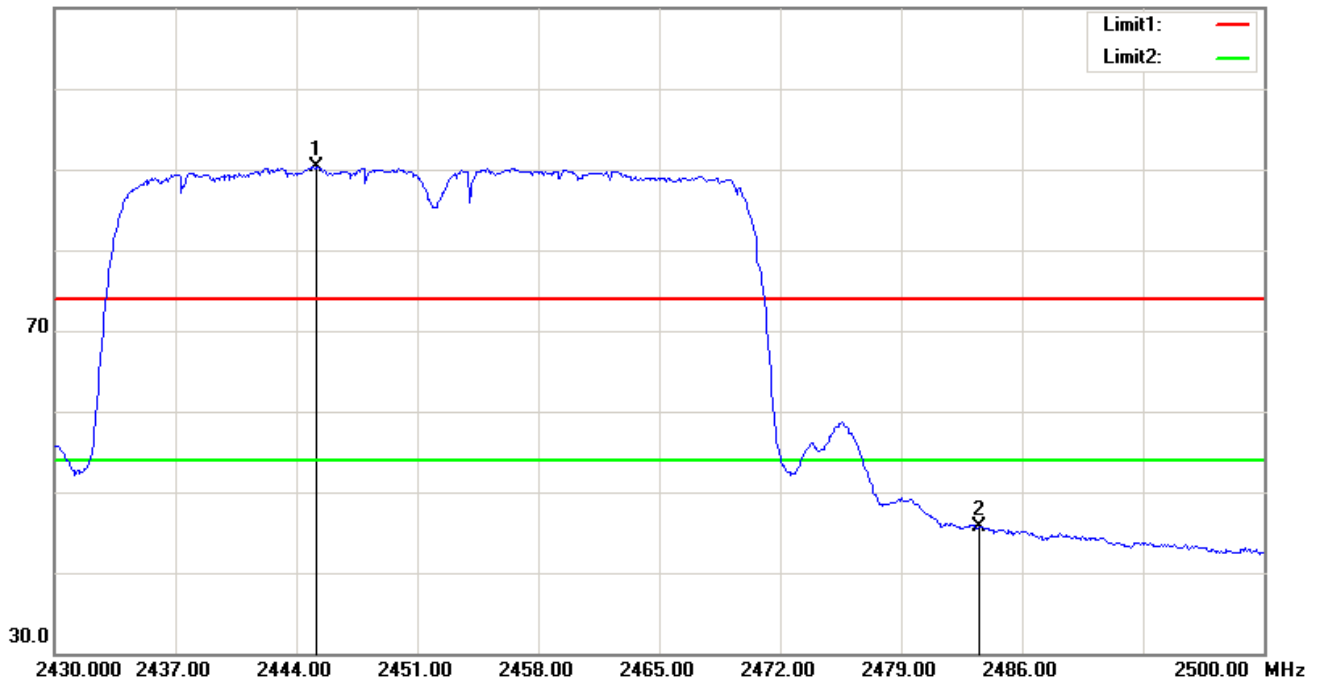

4. OCCUPIED BANDWIDTH TEST

4.1 APPLIED PROCEDURES / LIMIT

LP0002				
Section	Test Item	Limit	Frequency Range (MHz)	Result
3.10.1(6.2.1)	Bandwidth	$\geq 500\text{KHz}$ (6dB bandwidth)	2400-2483.5	PASS

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	$>$ Measurement Bandwidth or Channel Separation
RB	100 kHz (6dB Bandwidth) / 100 kHz (Channel Separation)
VB	300 kHz (6dB Bandwidth) / 300 kHz (Channel Separation)
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

4.1.1 TEST PROCEDURE

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
- Spectrum Setting : RBW= 100KHz, VBW=300KHz, Sweep time = Auto.

4.1.2 TEST SETUP



4.1.3 EUT OPERATION CONDITIONS


The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

4.1.4 TEST RESULTS


EUT :	液晶顯示器	Model Name :	LE65K6500U
Temperature :	25 °C	Relative Humidity :	60%
Pressure :	1010 hPa	Test Voltage :	AC 110/60Hz
Test Mode :	CH01 / CH06 /CH11(802.11b Data rate 1Mbps)		

Frequency	6dB Bandwidth (MHz)	Channel Separation (Limit)	Result
2412 MHz	10.06	$\geq 500\text{KHz}$	Pass
2437 MHz	10.05	$\geq 500\text{KHz}$	Pass
2462 MHz	10.06	$\geq 500\text{KHz}$	Pass


CH01

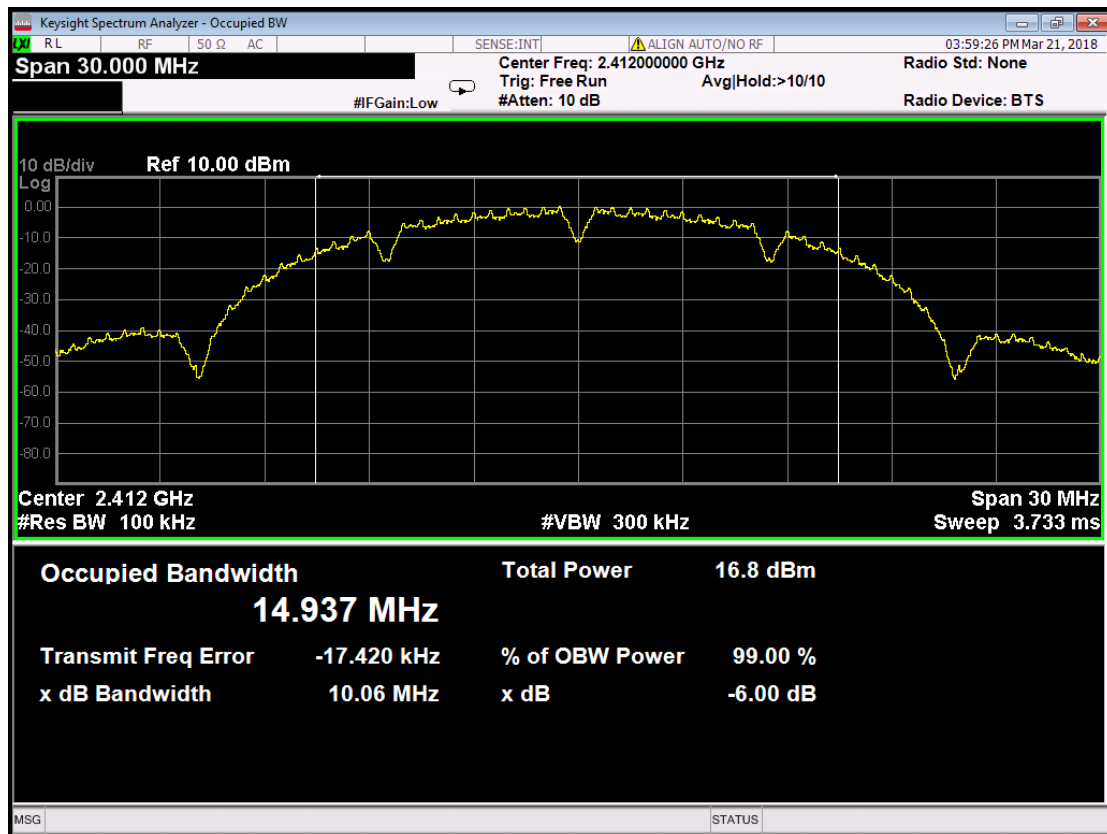

CH06

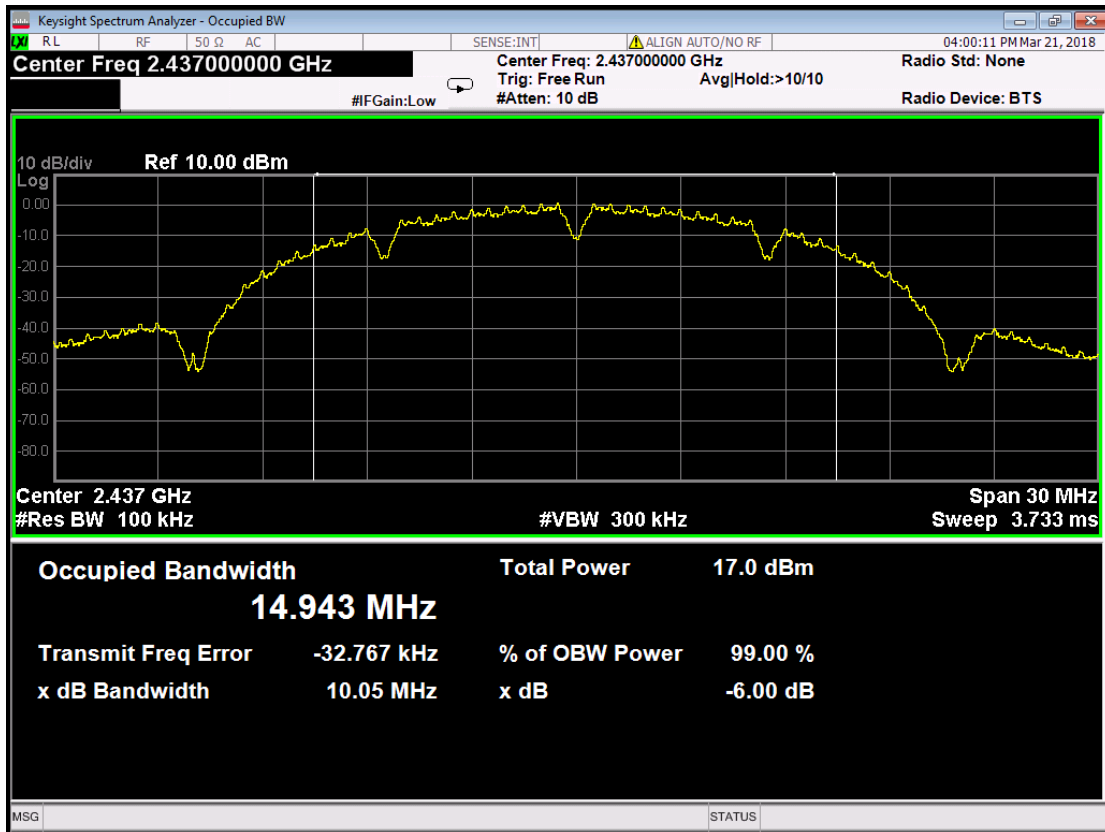


CH11

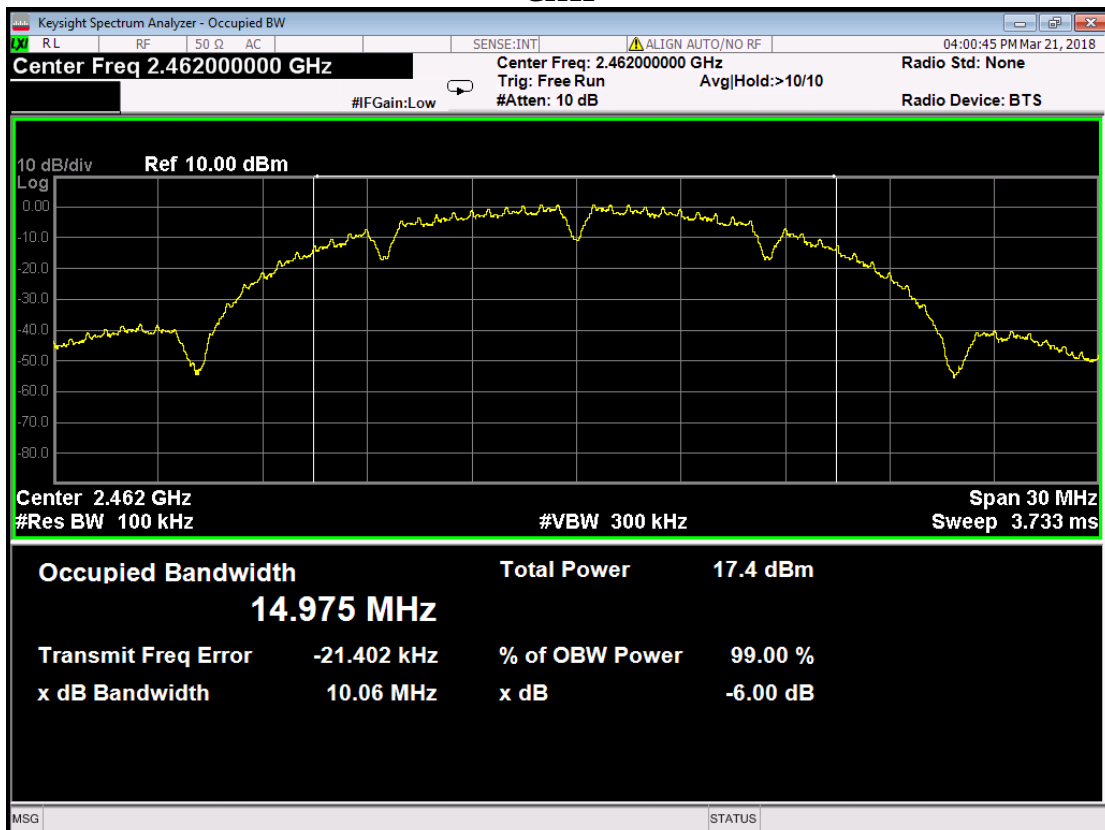


EUT :	液晶顯示器	Model Name :	LE65K6500U
Temperature :	25 °C	Relative Humidity :	60%
Pressure :	1010 hPa	Test Voltage :	AC 110/60Hz
Test Mode :	CH01 / CH06 / CH11(802.11g Data rate 6Mbps)		

Frequency	6dB Bandwidth (MHz)	Channel Separation (Limit)	Result
2412 MHz	16.56	>= 500KHz	Pass
2437 MHz	16.55	>= 500KHz	Pass
2462 MHz	16.56	>= 500KHz	Pass


CH01

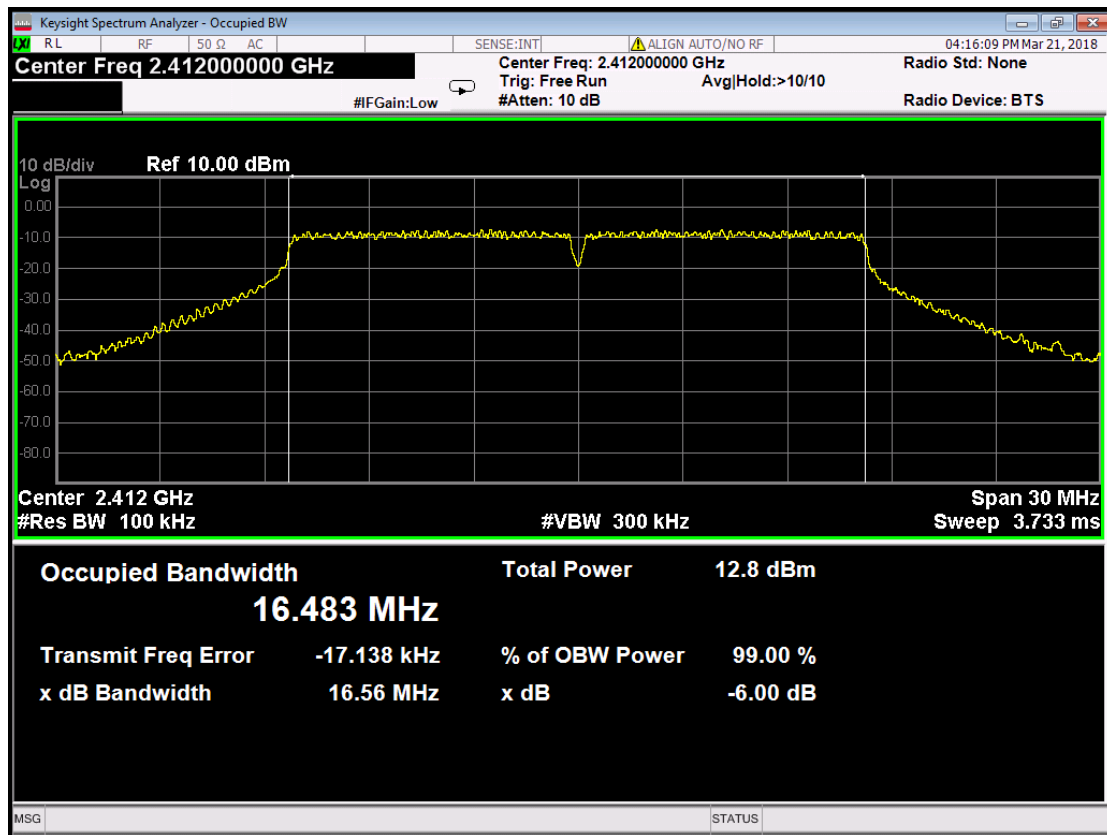

CH06

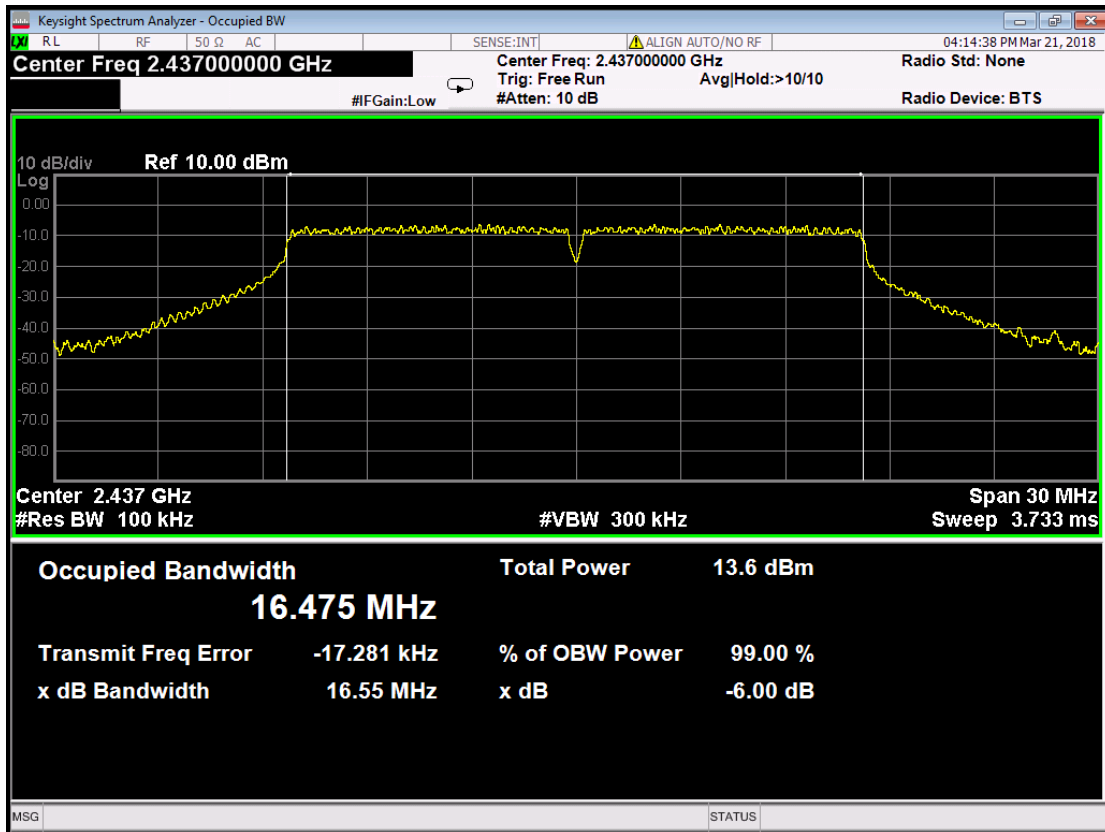


CH11

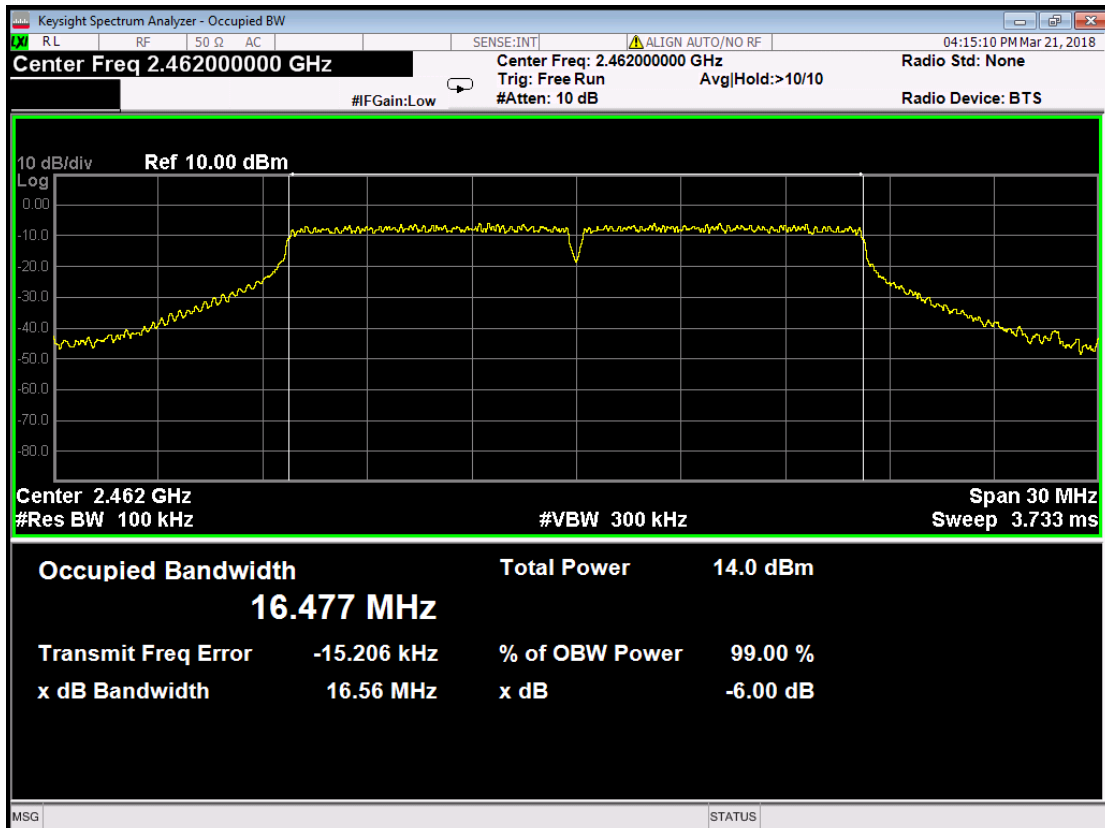


EUT :	液晶顯示器	Model Name :	LE65K6500U
Temperature :	25 °C	Relative Humidity :	60%
Pressure :	1010 hPa	Test Voltage :	AC 110/60Hz
Test Mode :	CH01 / CH06/ CH11(802.11n20 Data rate 6.5Mbps)		

Frequency	6dB Bandwidth (MHz)	Channel Separation (Limit)	Result
2412 MHz	17.78	$\geq 500\text{KHz}$	Pass
2437 MHz	17.77	$\geq 500\text{KHz}$	Pass
2462 MHz	17.78	$\geq 500\text{KHz}$	Pass


CH01

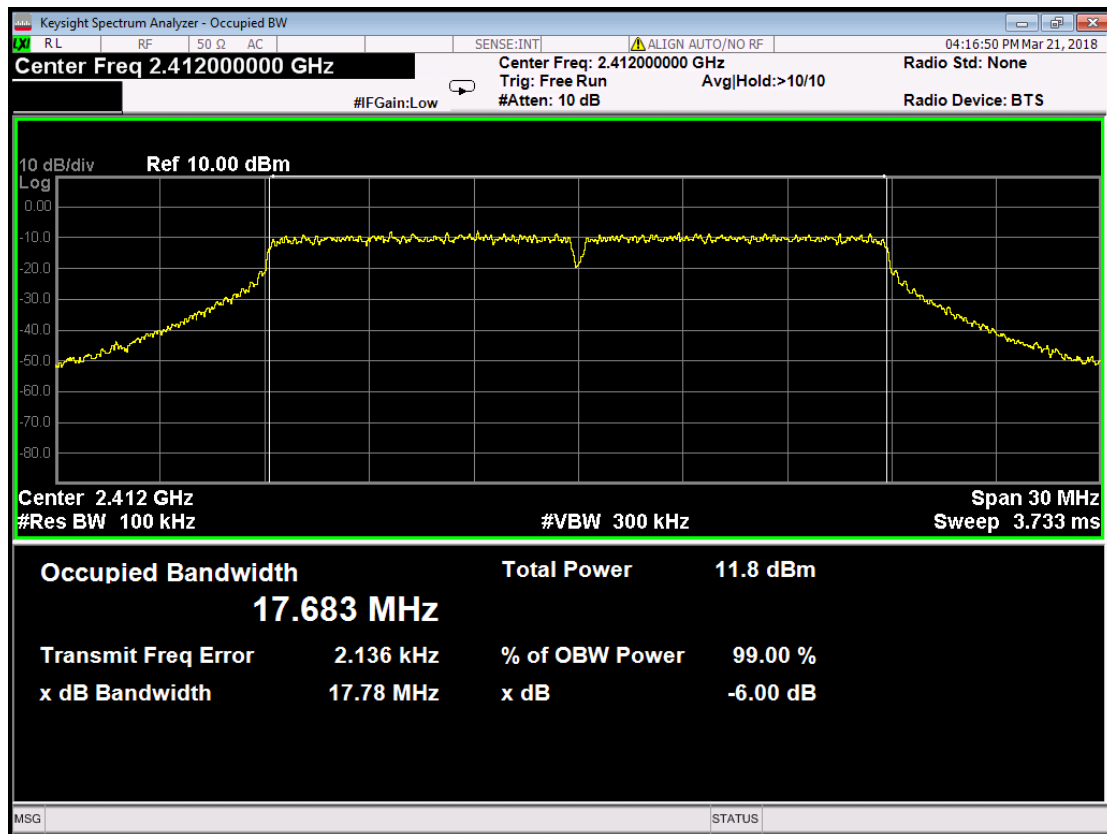

CH06

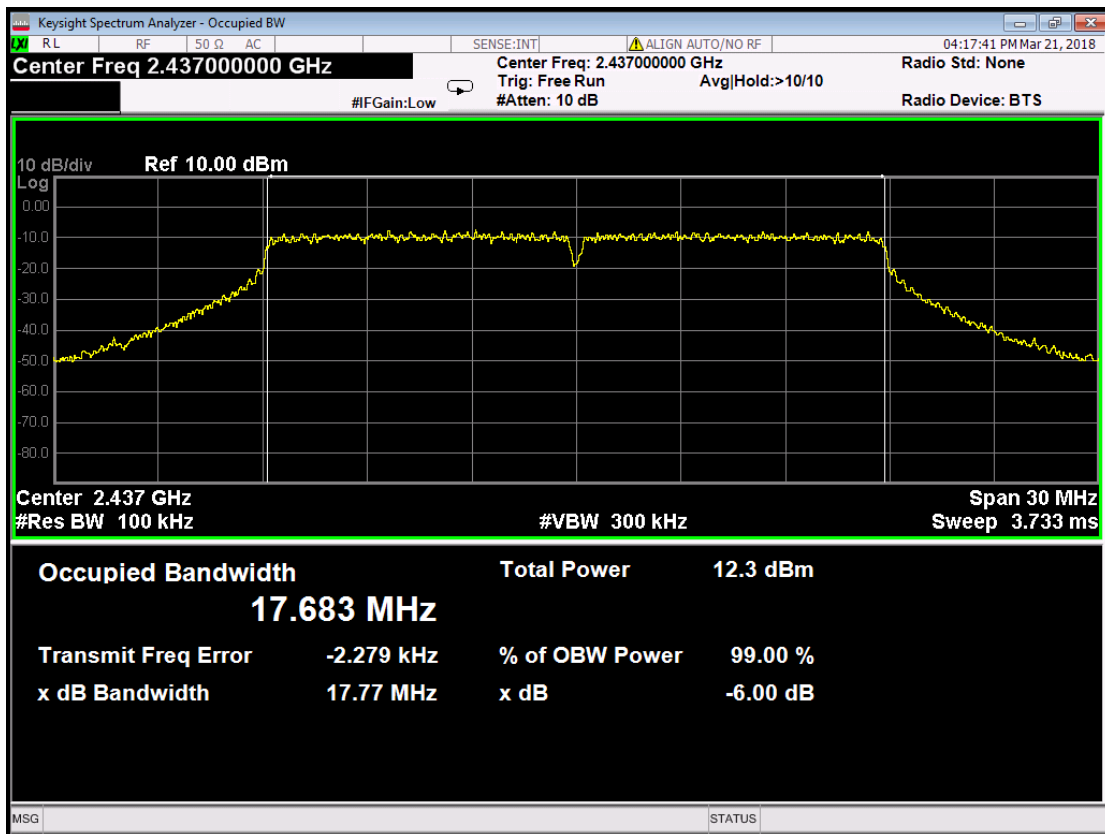


CH11

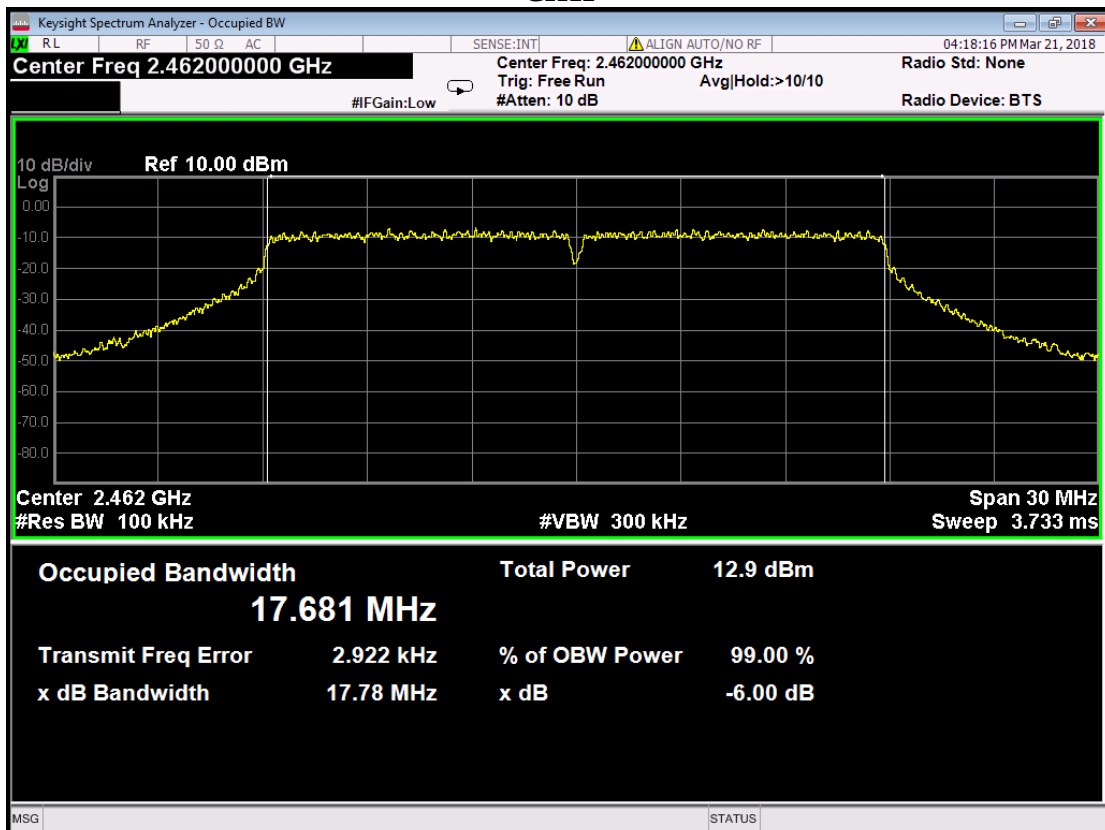


EUT :	液晶顯示器	Model Name :	LE65K6500U
Temperature :	25 °C	Relative Humidity :	60%
Pressure :	1010 hPa	Test Voltage :	AC 110/60Hz
Test Mode :	CH03 / CH06/ CH09(802.11n40 Data rate 13.5Mbps)		

Frequency	6dB Bandwidth (MHz)	Channel Separation (Limit)	Result
2422 MHz	36.34	$\geq 500\text{KHz}$	Pass
2437 MHz	36.35	$\geq 500\text{KHz}$	Pass
2452 MHz	36.36	$\geq 500\text{KHz}$	Pass


CH03

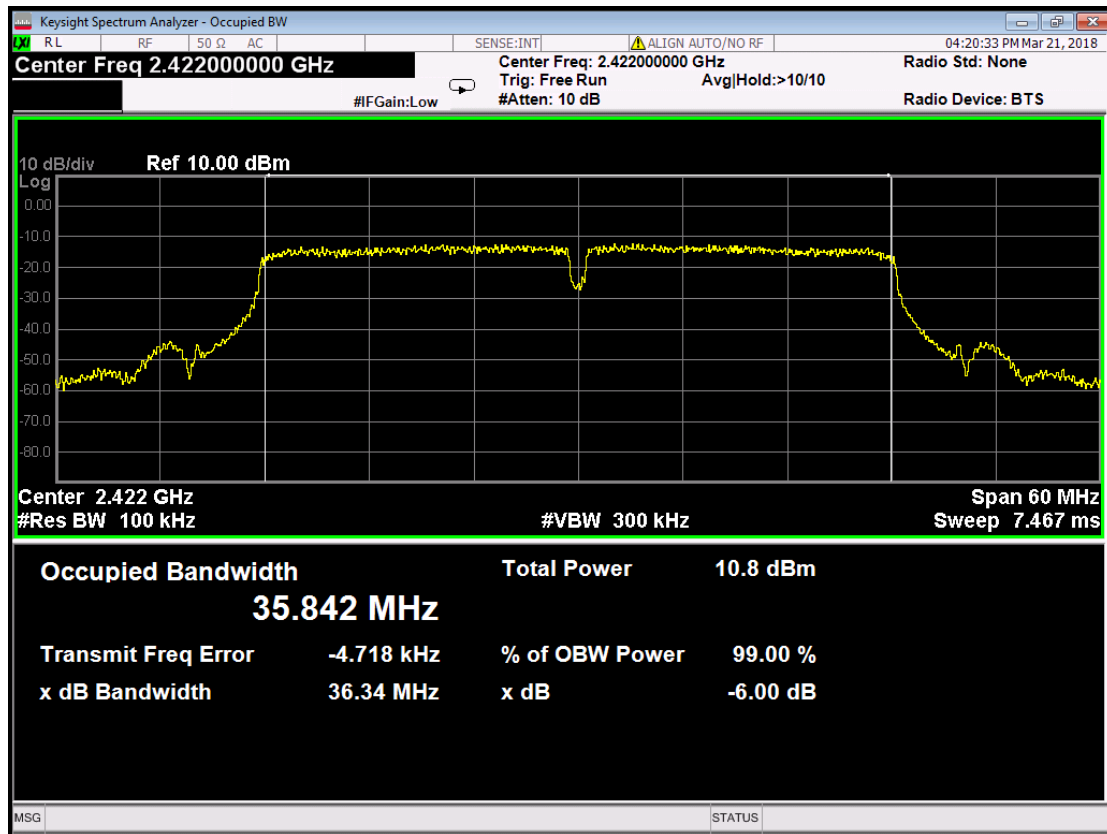

CH06

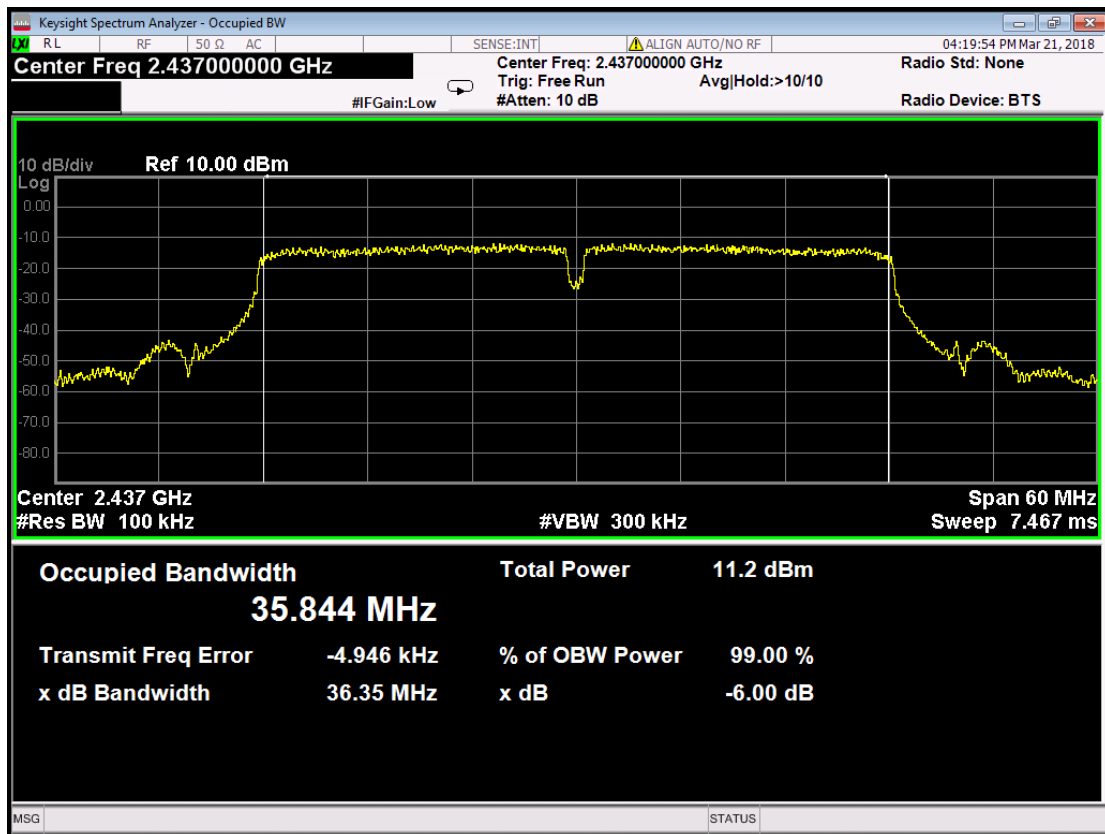

CH09

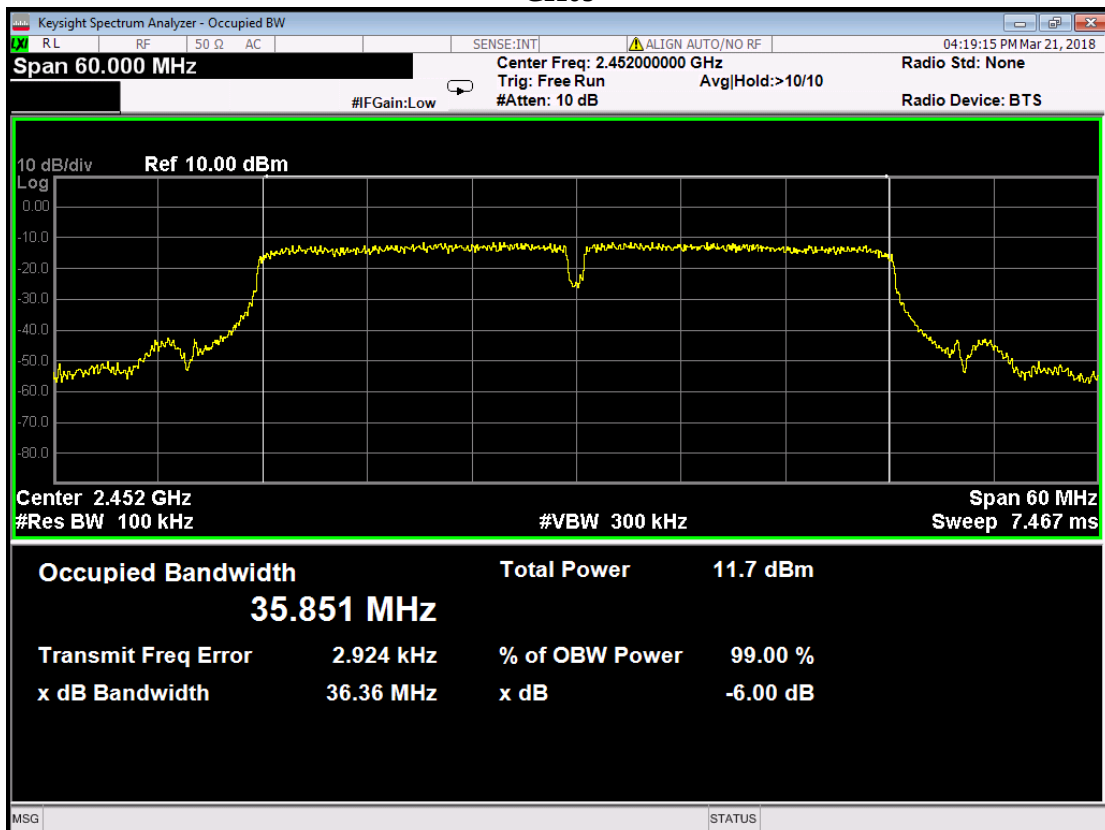

5. POWER DENSITY

5.1 APPLIED PROCEDURES / LIMIT


LP0002				
Section	Test Item	Limit	Frequency Range (MHz)	Result
3.10.1(6.2.2)	Power density	8dBm	2400-2483.5	PASS

Spectrum Parameters	Setting
Attenuation	Auto
Span Frequency	> Operating Frequency Range
RB	3 kHz
VB	10 kHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

5.1.1 TEST PROCEDURE


- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
- Spectrum Setting : RBW= 3KHz, VBW=10KHz, Sweep time = 100S, Span=300KHz.



5.1.2 TEST SETUP

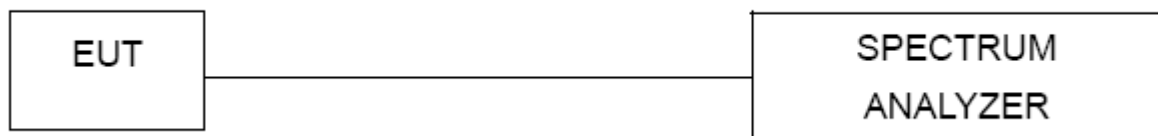

5.1.3 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

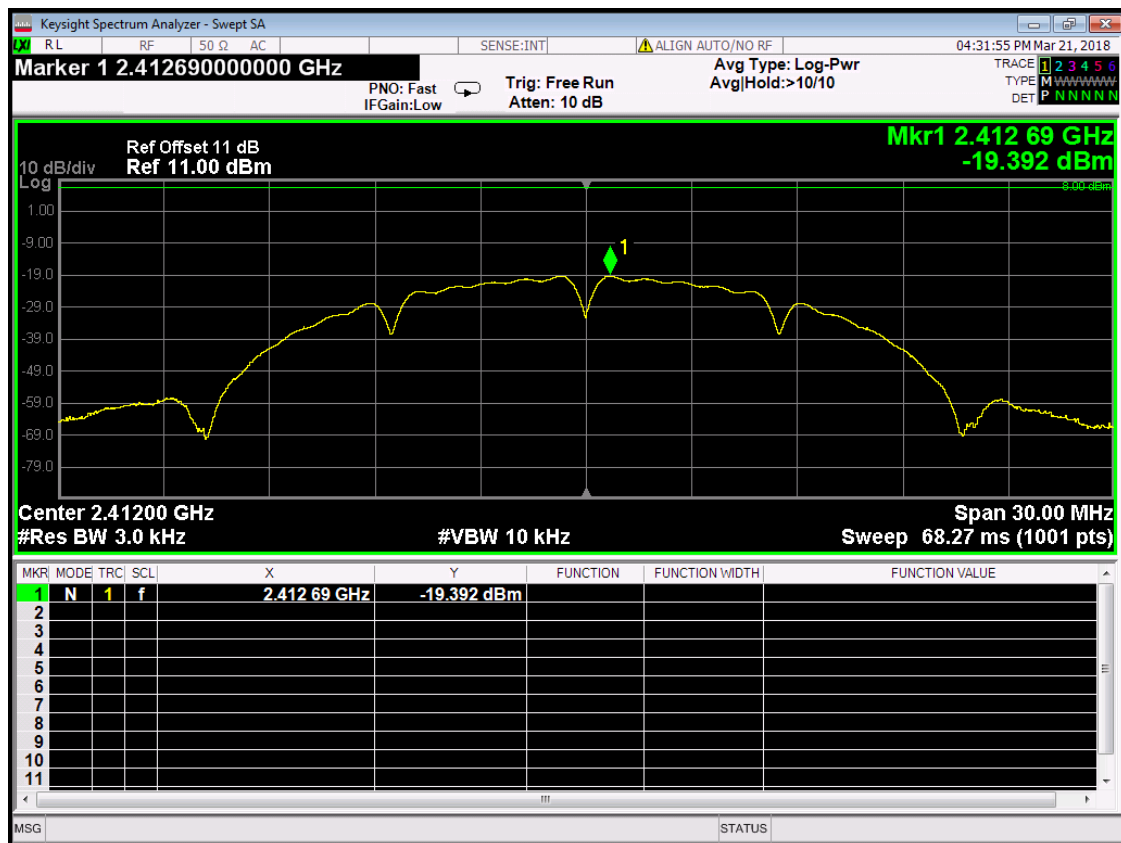

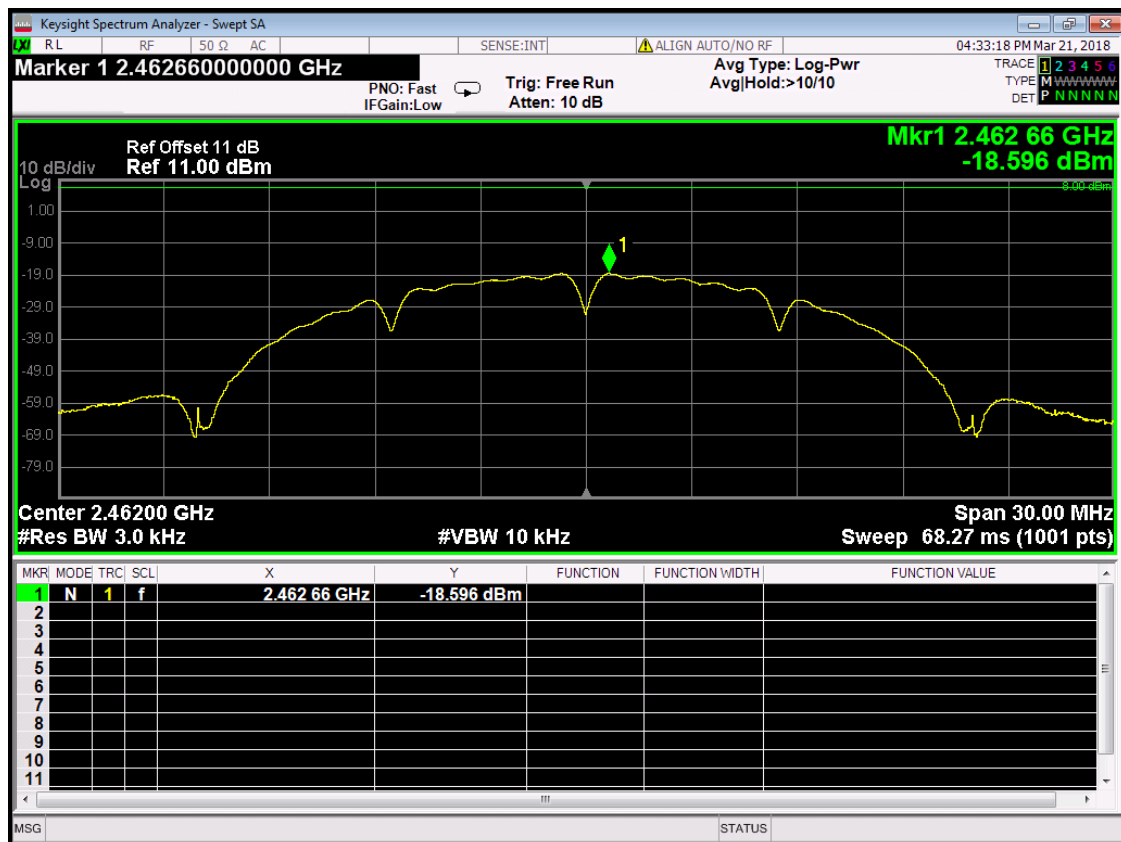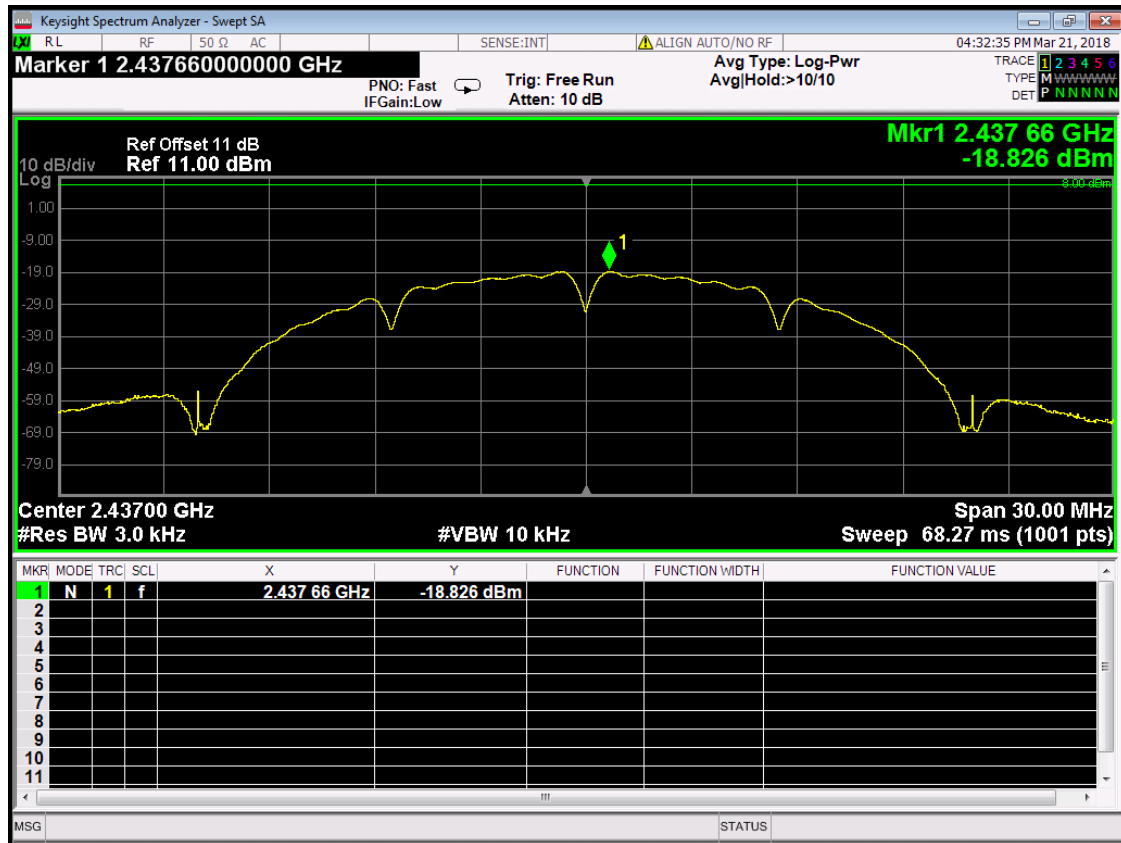

Test Channel	Frequency (MHz)	Power Density (dBm)	LIMIT (dBm)
CH01	2412 MHz	-21.217	8
CH06	2437 MHz	-21.352	8
CH11	2462 MHz	-19.966	8

Keysight Spectrum Analyzer - Swept SA

RL RF 50 Ω AC SENSE:INT ALIGN AUTO/NO RF 04:31:14 PM Mar 21, 2018

Marker 1 2.409750000000 GHz PNO: Fast IFGain:Low Trig: Free Run Atten: 10 dB Avg Type: Log-Pwr Avg/Hold:>10/10

TRACE 1 2 3 4 5 6
TYPE M W W W W W W W
DET P N N N N N

Ref Offset 11 dB
Ref 11.00 dBm



10 dB/div
Log

Mkr1 2.409 75 GHz
-21.217 dBm

Center 2.41200 GHz Span 30.00 MHz
#Res BW 3.0 kHz #VBW 10 kHz Sweep 68.27 ms (1001 pts)

MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE
1	N	1	f	2.409 75 GHz	-21.217 dBm			
2								
3								
4								
5								
6								
7								
8								
9								
10								
11								

MSG STATUS

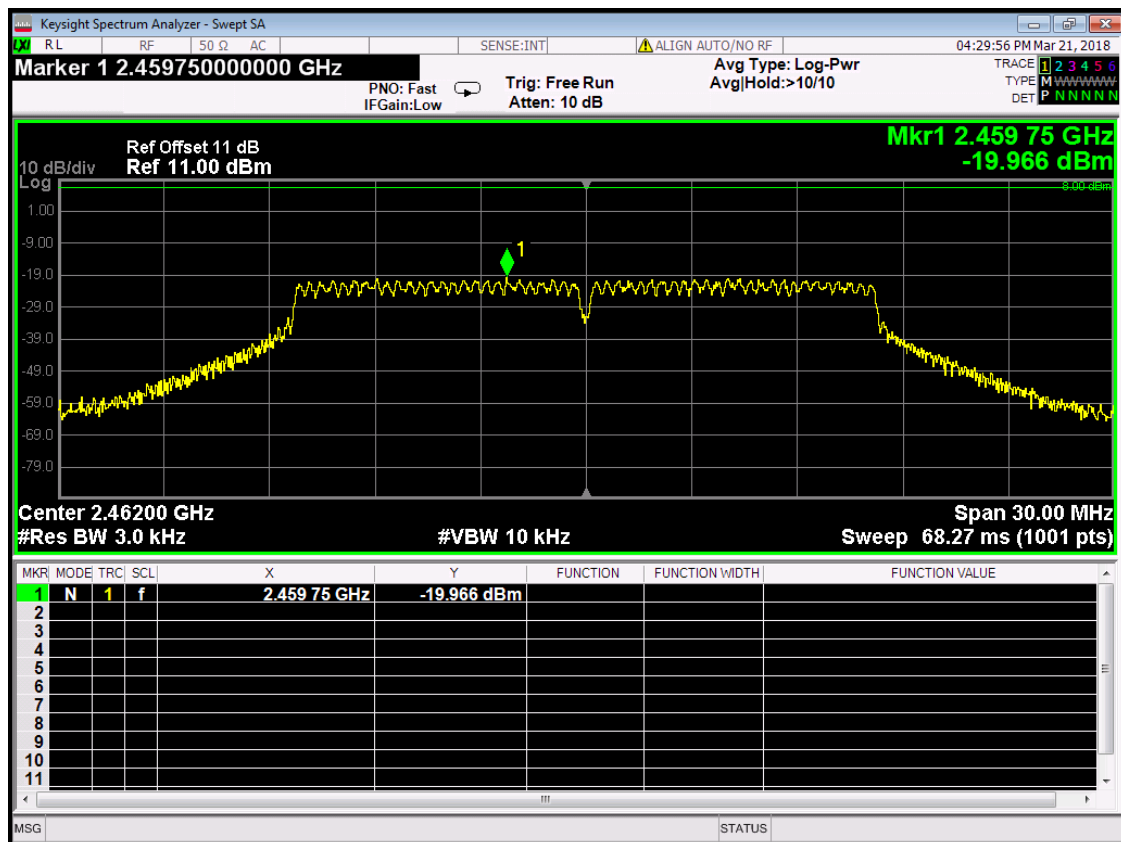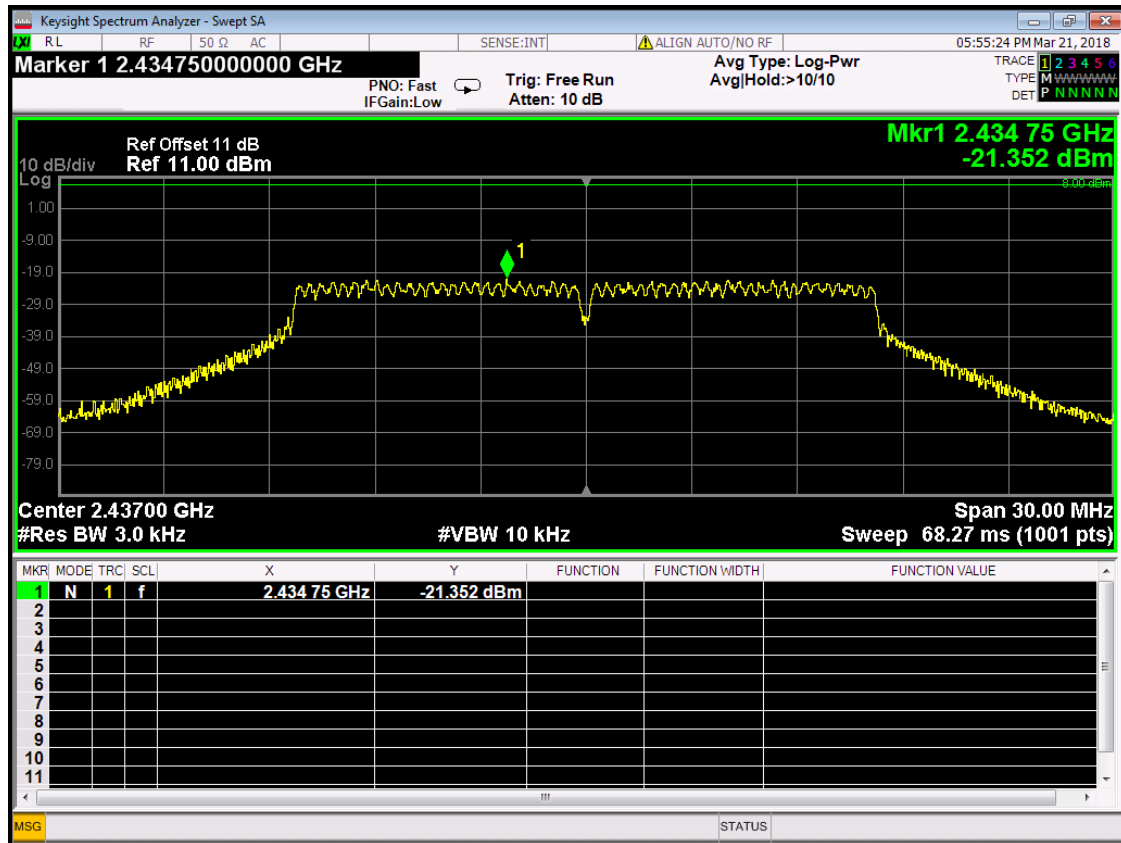

Test Channel	Frequency (MHz)	Power Density (dBm)	LIMIT (dBm)
CH01	2412 MHz	-21.412	8
CH06	2437 MHz	-21.254	8
CH11	2462 MHz	-20.583	8

[illegible]

Keysight Spectrum Analyzer - Swept SA

RL RF 50 Ω AC SENSE:INT ALIGN AUTO/NO RF 04:28:27 PM Mar 21, 2018

Marker 1 2.430370000000 GHz PNO: Fast IFGain:Low Trig: Free Run Atten: 10 dB Avg Type: Log-Pwr Avg/Hold:>10/10

TRACE 1 2 3 4 5 6
TYPE M W W W W W W W
DET P N N N N N N

Ref Offset 11 dB
Ref 11.00 dB

Mkr1 2.430 37 GHz
-21.254 dBm

10 dB/div
Log

Center 2.43700 GHz
#Res BW 3.0 kHz #VBW 10 kHz Span 30.00 MHz
Sweep 68.27 ms (1001 pts)

MRK	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE
1	N	1	f	2.430 37 GHz	-21.254 dBm			
2								
3								
4								
5								
6								
7								
8								
9								
10								
11								

MSG STATUS

Keysight Spectrum Analyzer - Swept SA

RL RF 50 Ω AC SENSE:INT ALIGN AUTO/NO RF 04:29:02 PM Mar 21, 2018

Marker 1 2.464190000000 GHz

PNO: Fast IFGain:Low Trig: Free Run Atten: 10 dB Avg Type: Log-Pwr Avg/Hold:>10/10

TRACE 1 2 3 4 5 6 TYPE M W W W W W W W DET P N N N N N N

Ref Offset 11 dB Ref 11.00 dB

10 dB/div Log

Mkr1 2.464 19 GHz -20.583 dBm

Center 2.46200 GHz Span 30.00 MHz

#Res BW 3.0 kHz #VBW 10 kHz Sweep 68.27 ms (1001 pts)

MRK	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE
1	N	1	f	2.464 19 GHz	-20.583 dBm			
2								
3								
4								
5								
6								
7								
8								
9								
10								
11								

MSG STATUS

Test Channel	Frequency (MHz)	Power Density (dBm)	LIMIT (dBm)
CH03	2422 MHz	-22.645	8
CH06	2437 MHz	-21.740	8
CH09	2452 MHz	-21.208	8

[illegible]

[illegible][illegible]

6. PEAK OUTPUT POWER TEST

6.1 APPLIED PROCEDURES / LIMIT

LP0002				
Section	Test Item	Limit	Frequency Range (MHz)	Result
3.10.1(2)	Peak Output Power	1 watt or 30dBm	2400-2483.5	PASS


6.1.1 TEST PROCEDURE

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
- Spectrum Setting : RBW= 1MHz, VBW= 3MHz, Sweep time = Auto.

6.1.2 DEVIATION FROM STANDARD

No deviation.

6.1.3 TEST SETUP

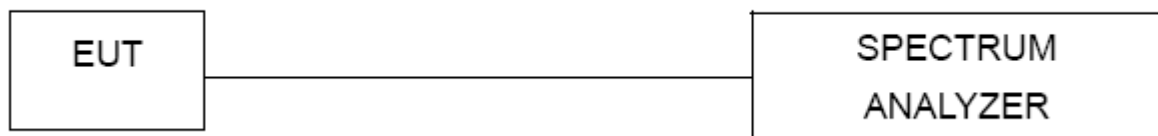

6.1.4 EUT OPERATION CONDITIONS


The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

6.1.5 TEST RESULTS


EUT :	液晶顯示器	Model Name :	LE65K6500U
Temperature :	25 °C	Relative Humidity :	60%
Pressure :	1010 hPa	Test Voltage :	AC 110/60Hz
Test Mode :	CH01/ CH06 /CH11 (802.11b Data rate 1Mbps)		

Test Channel	Frequency (MHz)	Peak Output Power (dBm)	LIMIT (dBm)	LIMIT (W)
CH01	2412 MHz	16.76	30	1
CH06	2437 MHz	16.72	30	1
CH11	2462 MHz	17.20	30	1


CH01

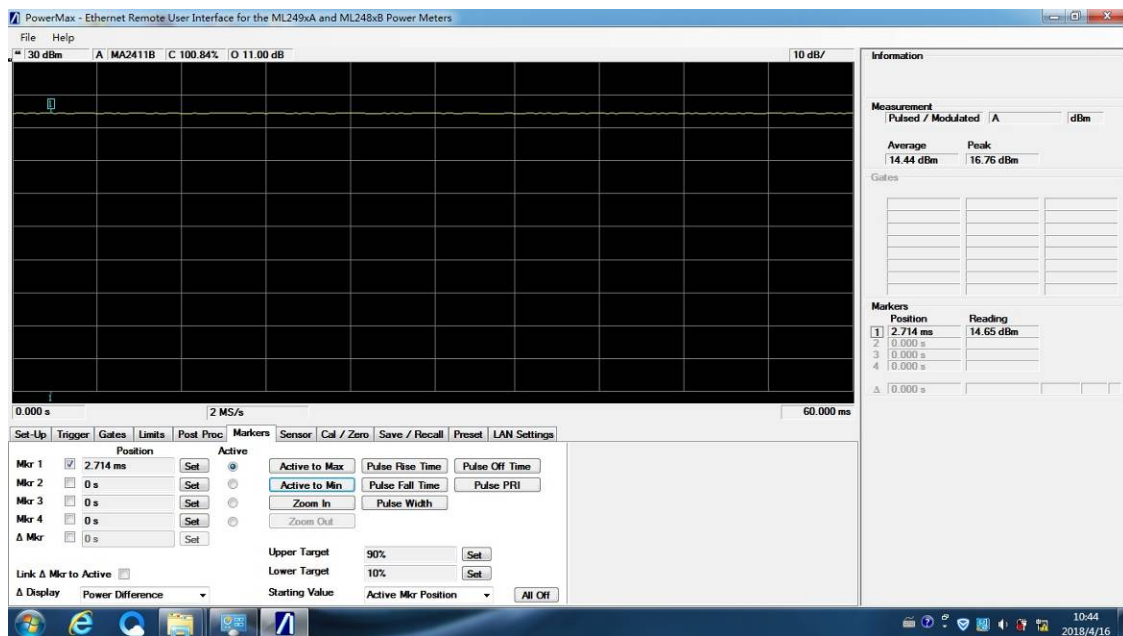

CH06

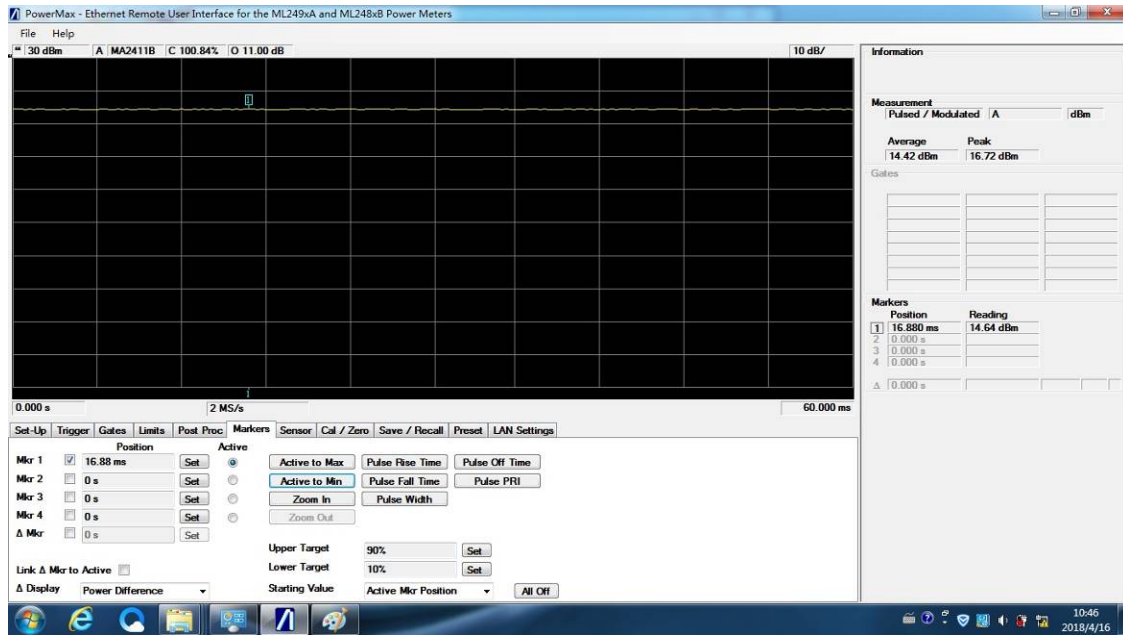


CH11

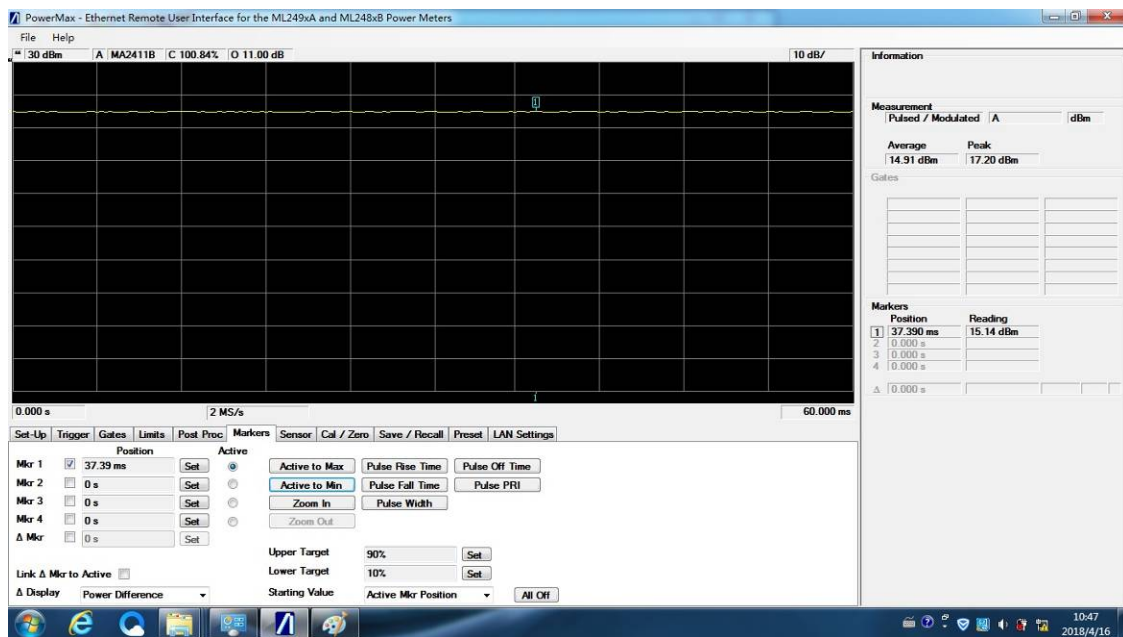


EUT :	液晶顯示器	Model Name :	LE65K6500U
Temperature :	25 °C	Relative Humidity :	60%
Pressure :	1010 hPa	Test Voltage :	AC 110/60Hz
Test Mode :	CH01/ CH06 /CH11 (802.11g Data rate 6Mbps)		

Test Channel	Frequency (MHz)	Peak Output Power (dBm)	LIMIT (dBm)	LIMIT (W)
CH01	2412 MHz	20.34	30	1
CH06	2437 MHz	20.44	30	1
CH11	2462 MHz	20.77	30	1


CH01

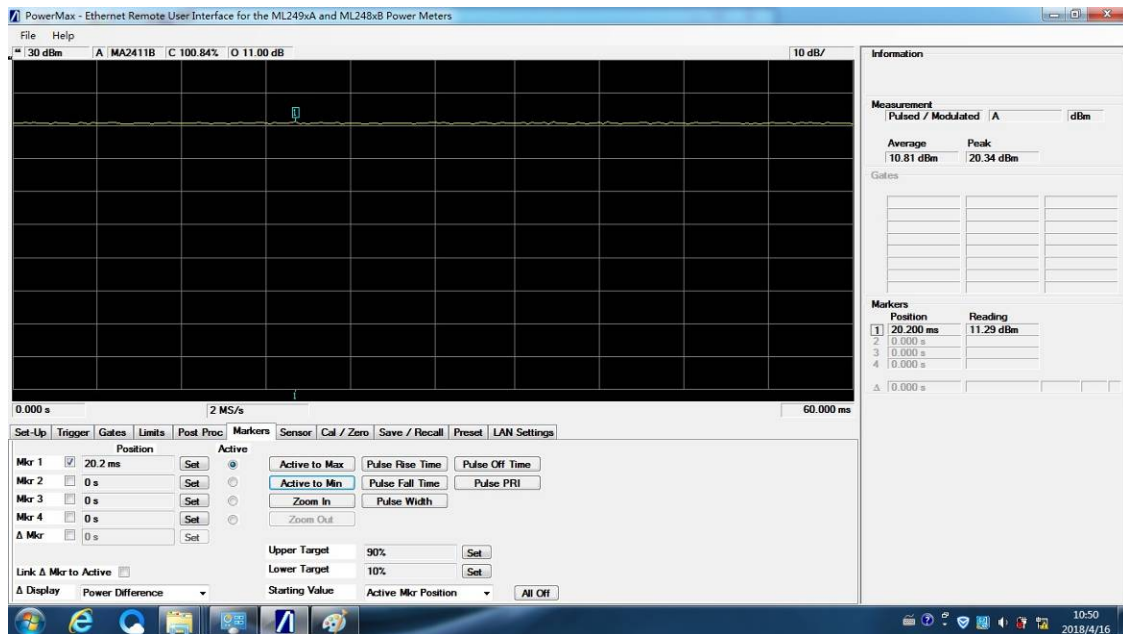

CH06

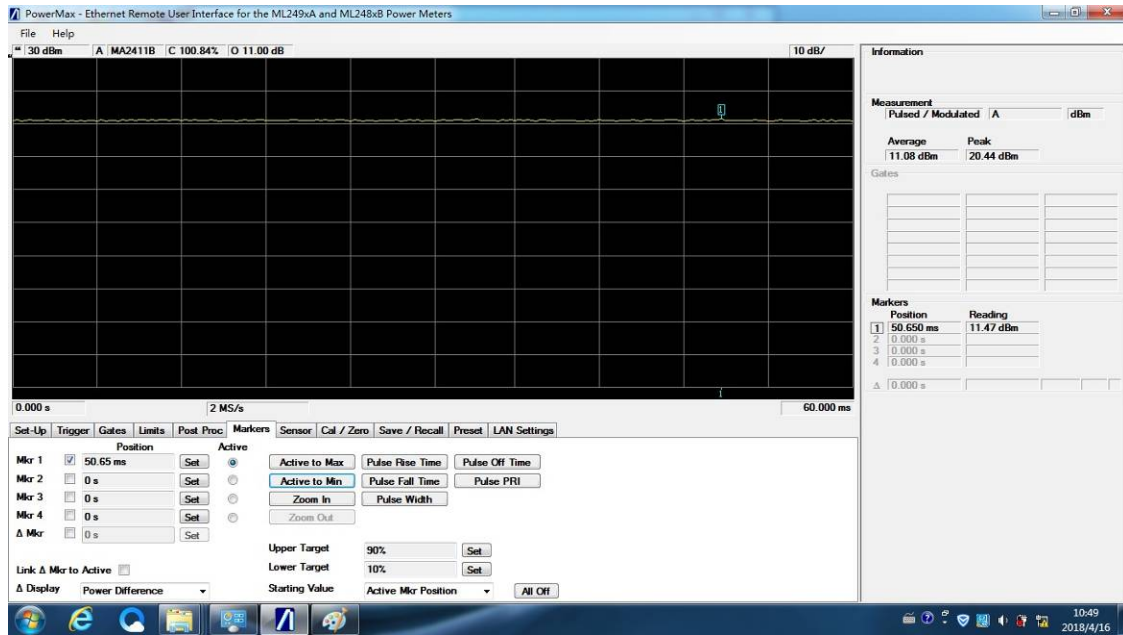


CH11

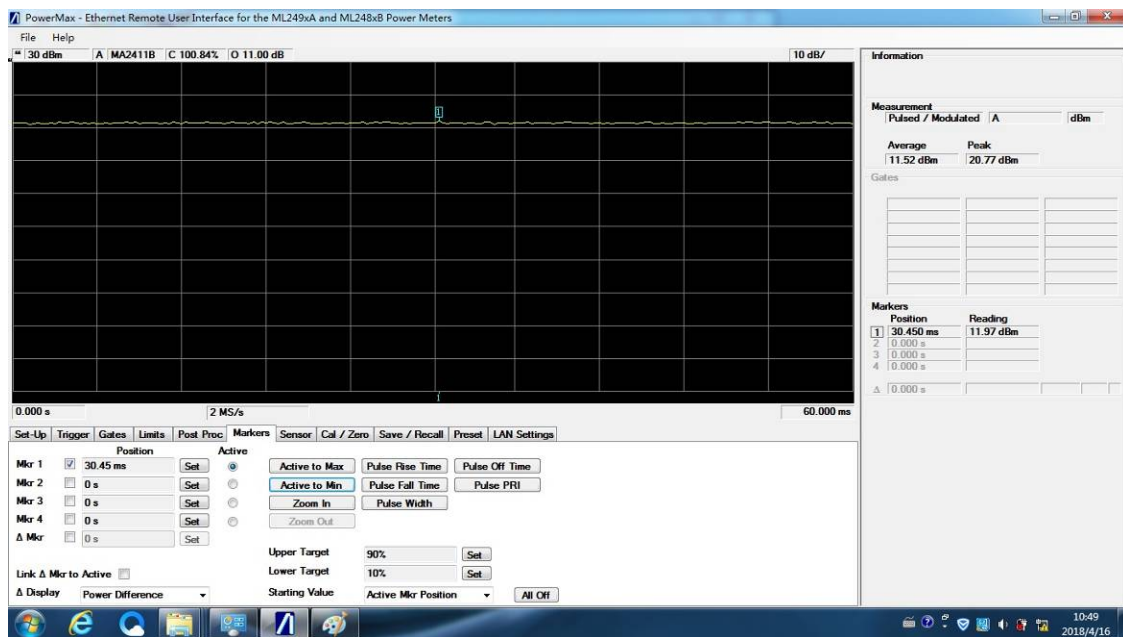


EUT :	液晶顯示器	Model Name :	LE65K6500U
Temperature :	25 °C	Relative Humidity :	60%
Pressure :	1010 hPa	Test Voltage :	AC 110/60Hz
Test Mode :	CH01/ CH06 /CH11 (802.11n20 Data rate 6.5Mbps)		

Test Channel	Frequency (MHz)	Peak Output Power (dBm)	LIMIT (dBm)	LIMIT (W)
CH01	2412 MHz	18.68	30	1
CH06	2437 MHz	18.85	30	1
CH11	2462 MHz	19.39	30	1


CH01

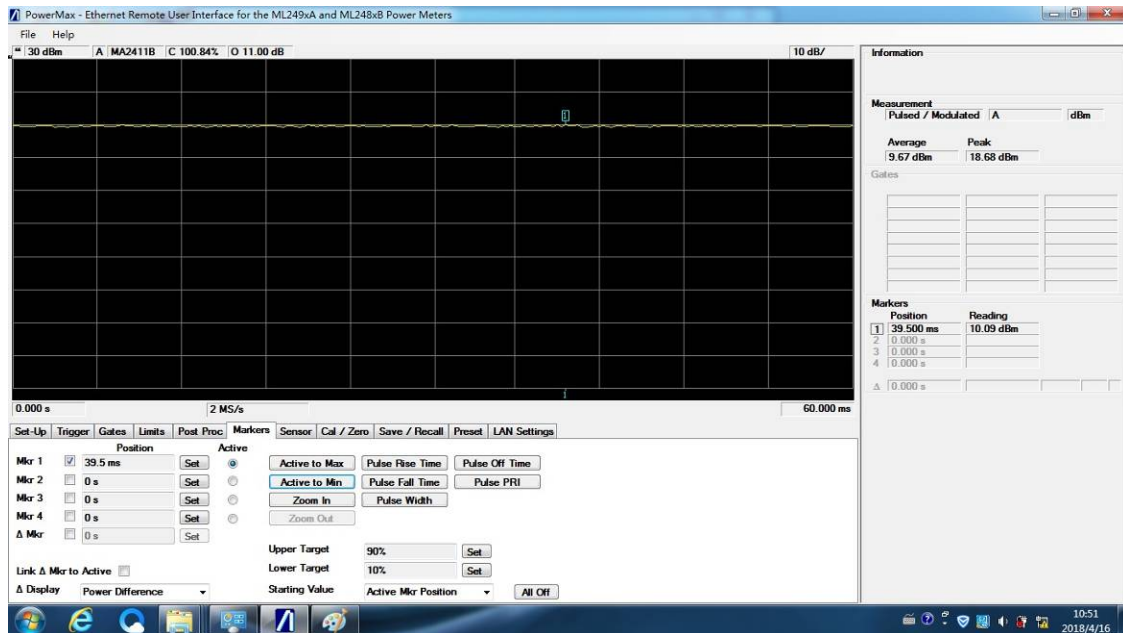

CH06

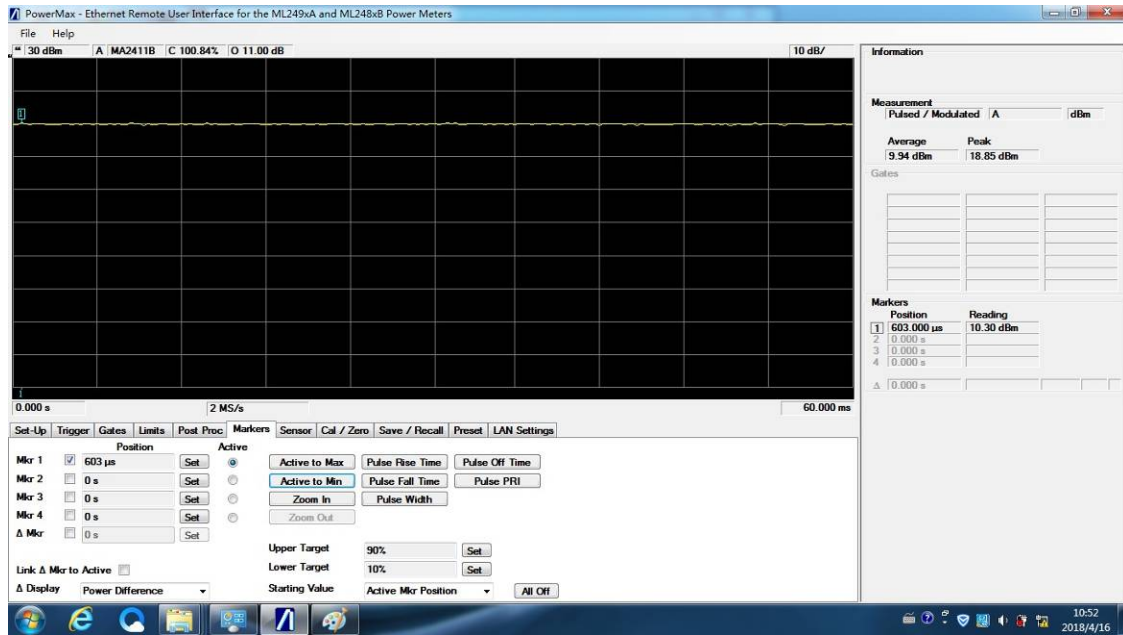


CH11

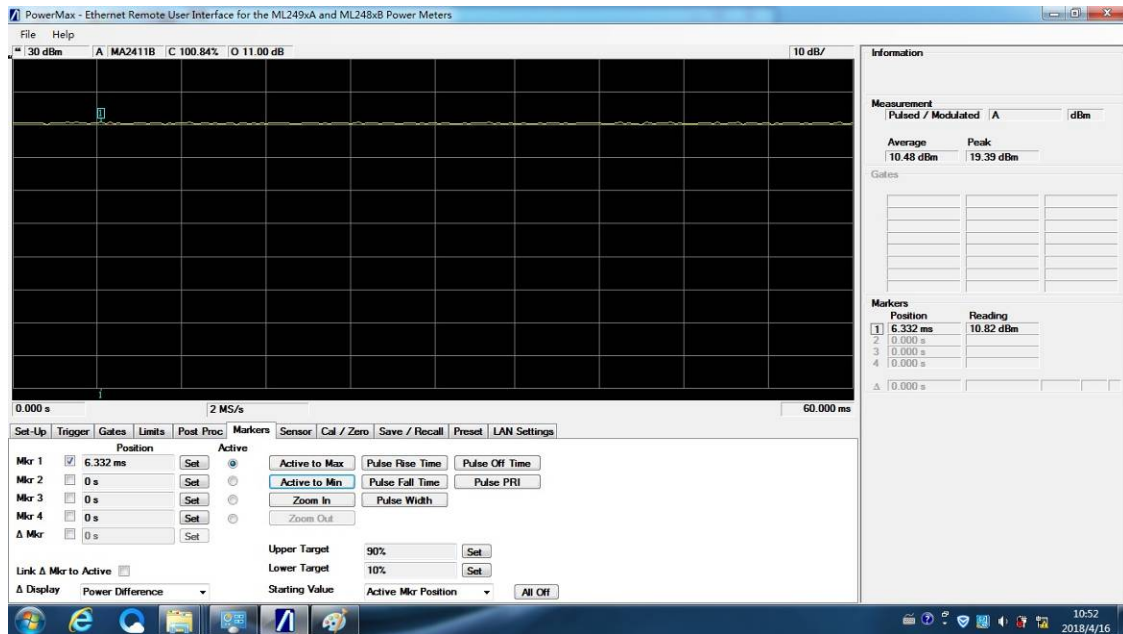


EUT :	液晶顯示器	Model Name :	LE65K6500U
Temperature :	25 °C	Relative Humidity :	60%
Pressure :	1010 hPa	Test Voltage :	AC 110/60Hz
Test Mode :	CH03/ CH06 /CH09 (802.11n40 Data rate 13.5Mbps)		

Test Channel	Frequency (MHz)	Peak Output Power (dBm)	LIMIT (dBm)	LIMIT (W)
CH01	2422 MHz	18.67	30	1
CH06	2437 MHz	18.92	30	1
CH11	2452 MHz	18.99	30	1


CH01

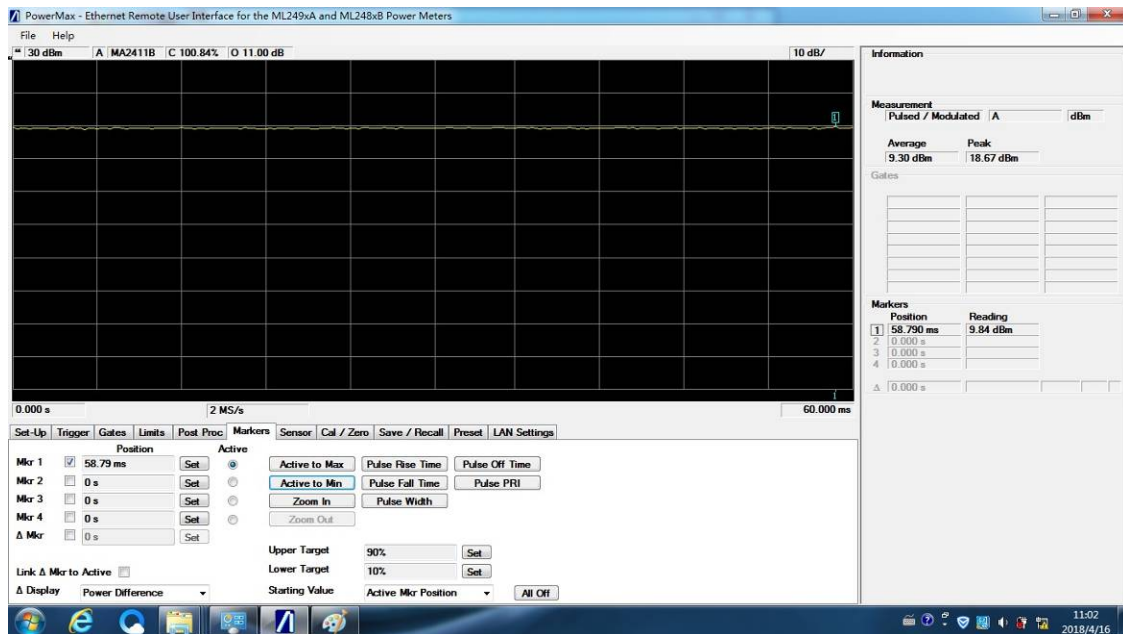

CH06

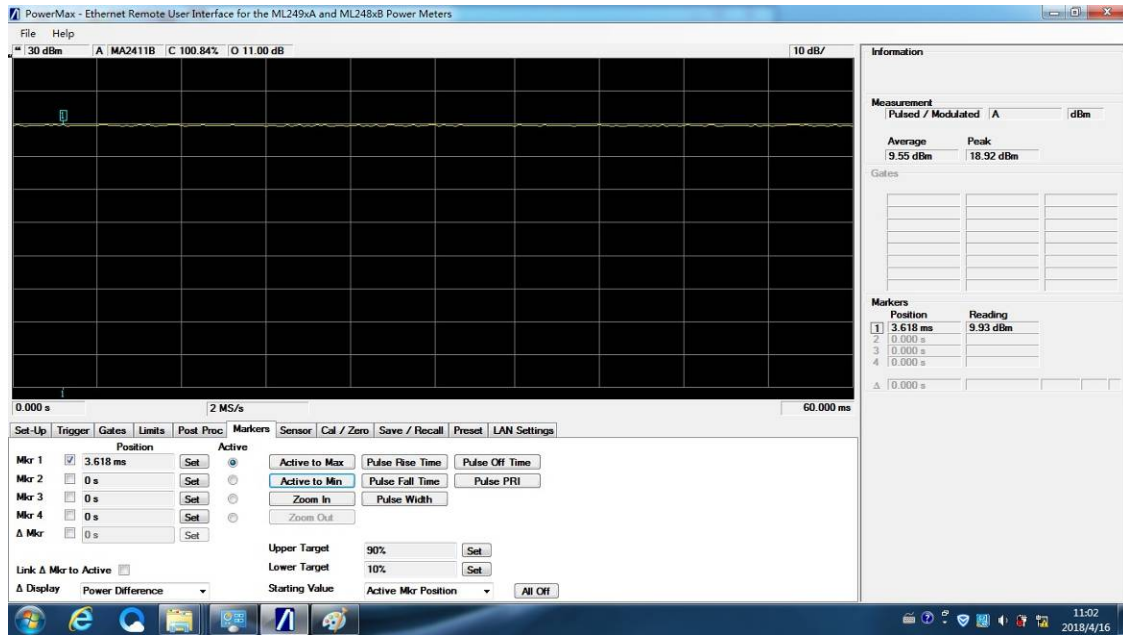

CH11

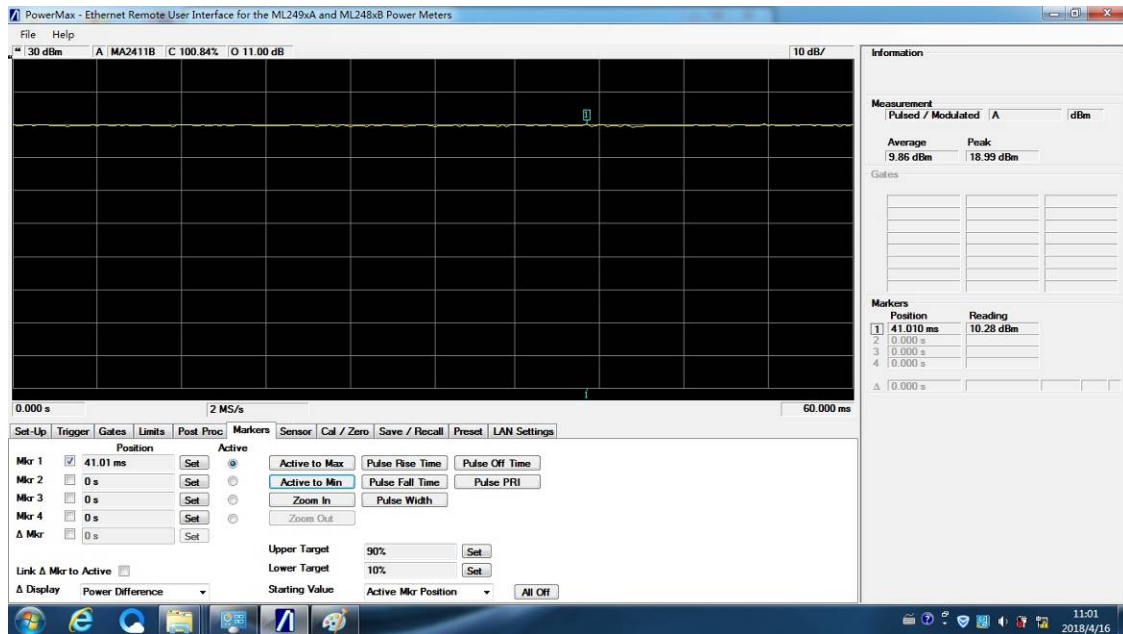

7. ANTENNA CONDUCTED SPURIOUS EMISSION

7.1 APPLIED PROCEDURES / LIMIT

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the modulation products of the spreading sequence, the information sequence and the carrier frequency shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power or shall not exceed the general levels specified in Section 2.8.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	100 MHz
RB / VB (emission in restricted band)	1MHz / 1MHz for Peak, 1 MHz / 10Hz for Average
RB / VB (other emission)	100 KHz /100 KHz for Peak

7.1.1 TEST PROCEDURE

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
- Spectrum Setting : RBW= 100KHz, VBW=100KHz, Sweep time = Auto.

7.1.2 TEST SETUP



7.1.3 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

7.1.4 TEST RESULTS

EUT :	液晶顯示器	Model Name :	LE65K6500U
Temperature :	25 °C	Relative Humidity :	60%
Pressure :	1010 hPa	Test Voltage :	AC 110/60Hz
Test Mode :	CH01/ CH11 (802.11b Data rate 1Mbps)		

in any 100kHz bandwidth outside the low frequency band	in any 100 kHz bandwidth outside the high frequency band
Pass	Pass

Result


In any 100kHz bandwidth outside the frequency band, the radio frequency power is at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power.




EUT :	65 寸显示器	Model Name :	LE65K6500U
Temperature :	25 °C	Relative Humidity :	60%
Pressure :	1010 hPa	Test Voltage :	AC 110/60Hz
Test Mode :	CH01/ CH11 (802.11g Data rate 6Mbps)		

in any 100kHz bandwidth outside the low frequency band	in any 100 kHz bandwidth outside the high frequency band
Pass	Pass
Result	
In any 100kHz bandwidth outside the frequency band, the radio frequency power is at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power.	

CH01 (Lower)

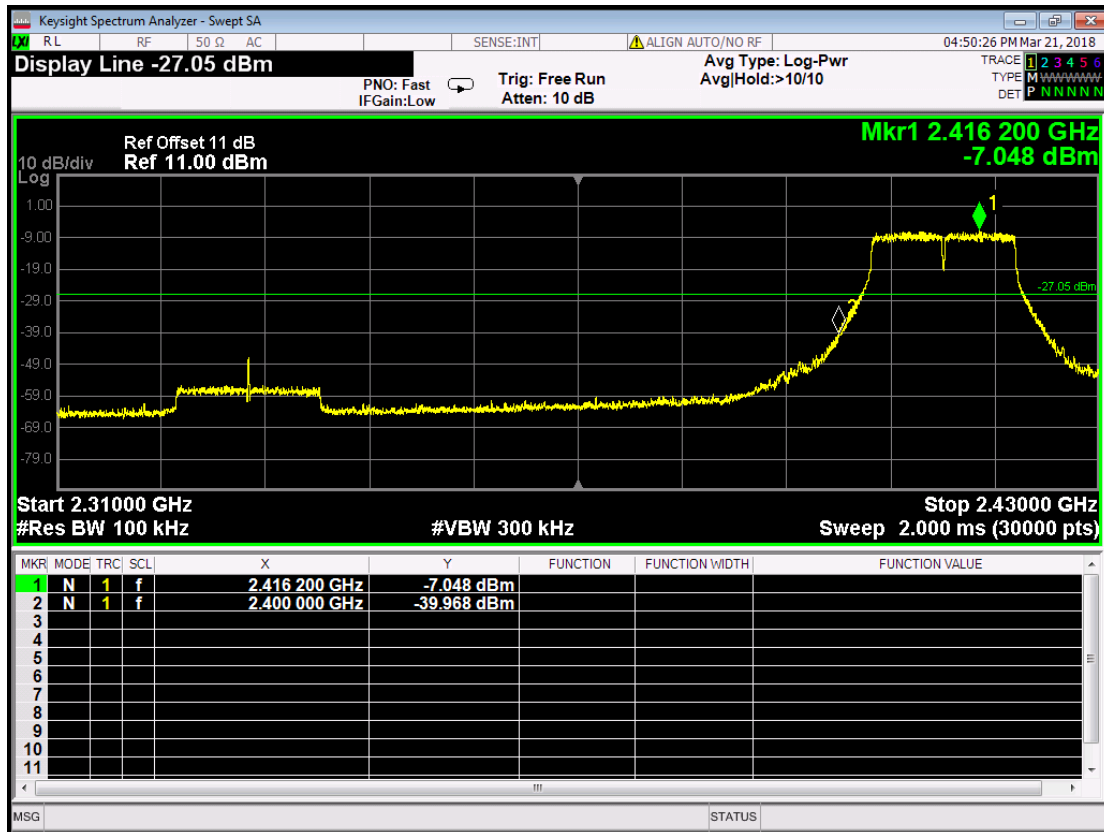

CH 11(Upper)

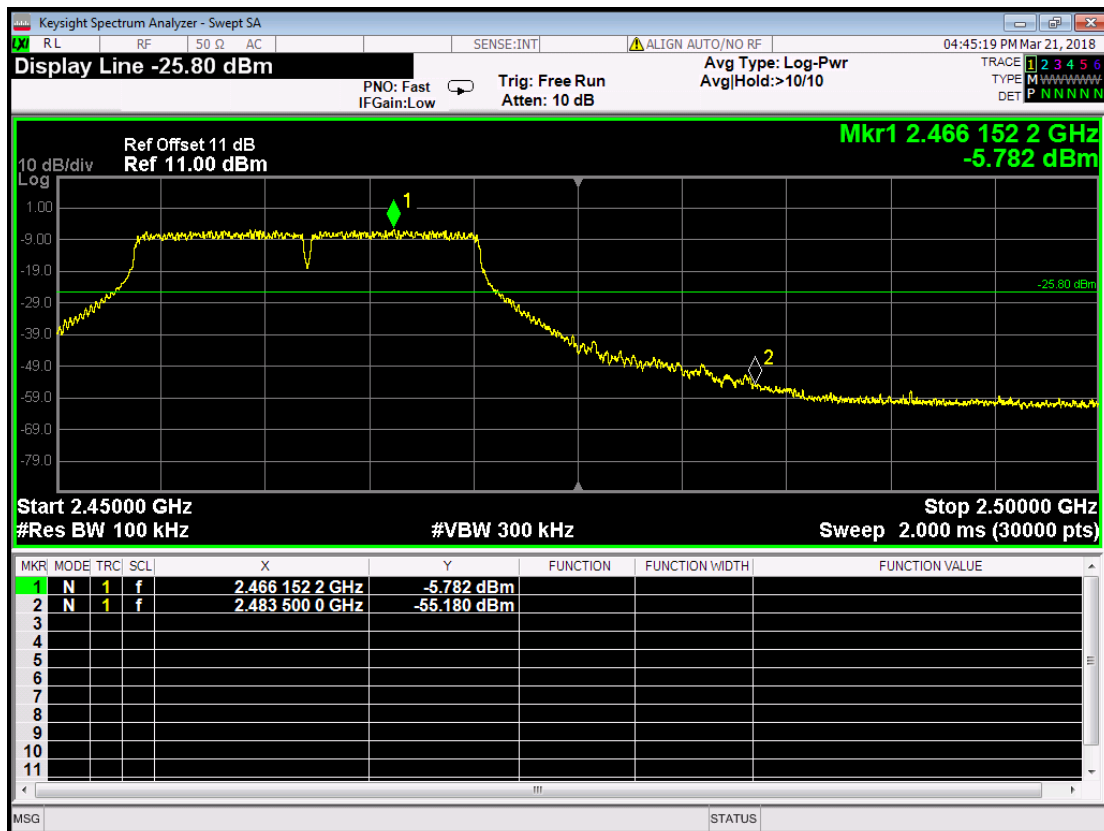


EUT :	65 寸显示器	Model Name :	LE65K6000U
-------	---------	--------------	------------


Temperature :	25 °C	Relative Humidity :	60%
Pressure :	1010 hPa	Test Voltage :	AC 110/60Hz
Test Mode :	CH01/ CH11 (802.11n20 Data rate 6.5Mbps)		

in any 100kHz bandwidth outside the low frequency band	in any 100 kHz bandwidth outside the high frequency band
Pass	Pass
Result	
In any 100kHz bandwidth outside the frequency band, the radio frequency power is at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power.	

CH01 (Lower)

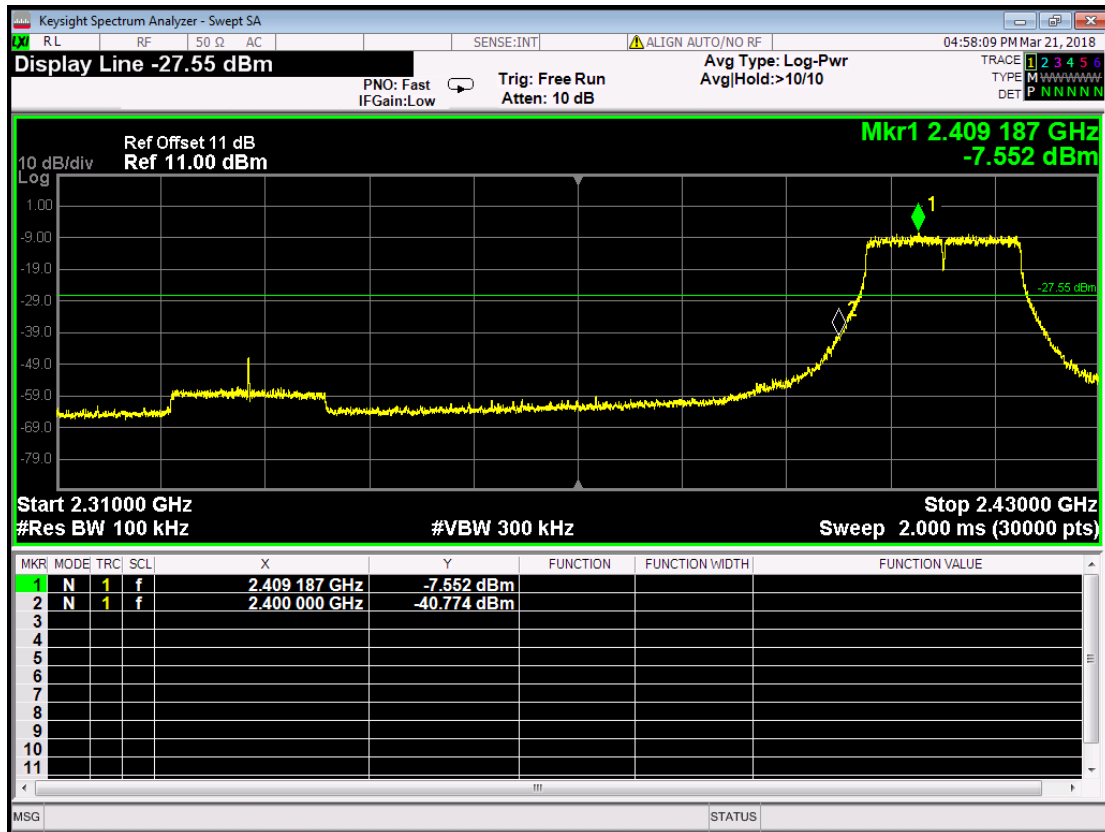


CH 11(Upper)

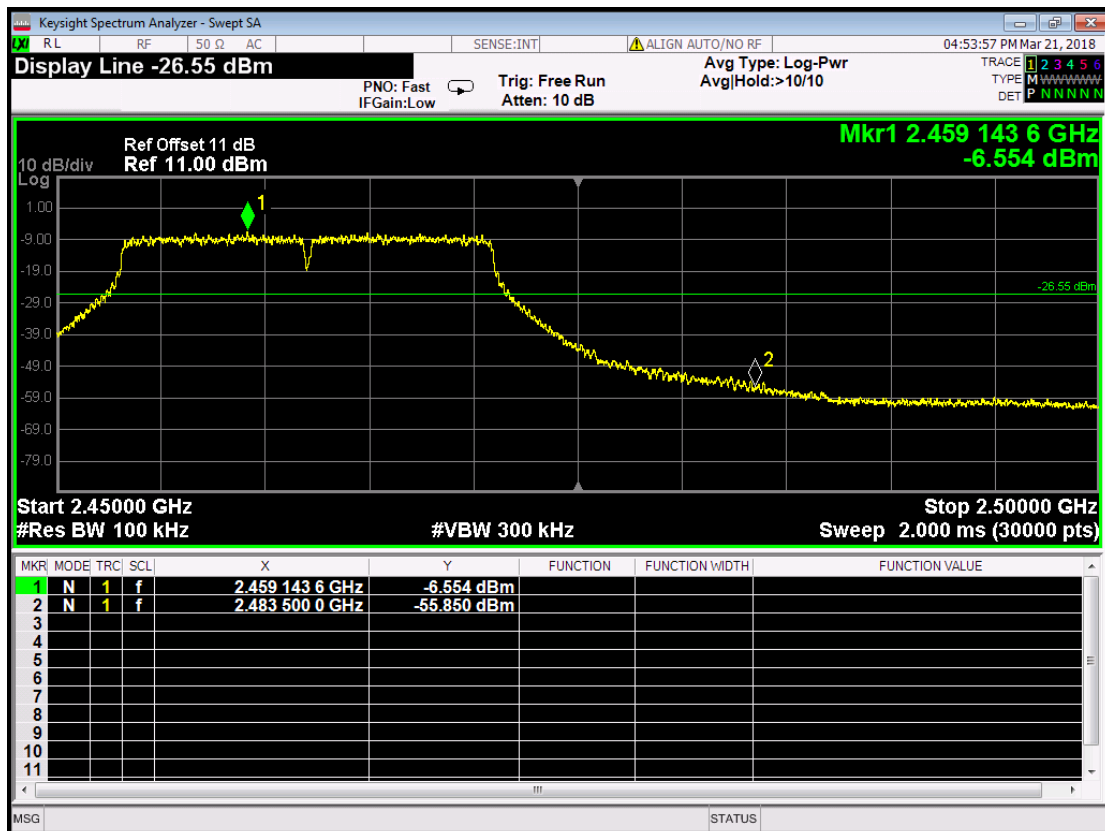


Temperature :	25 °C	Relative Humidity :	60%
Pressure :	1010 hPa	Test Voltage :	AC 110/60Hz
Test Mode :	CH01/ CH11 (802.11n40 Data rate 13.5Mbps)		

in any 100kHz bandwidth outside the low frequency band	in any 100 kHz bandwidth outside the high frequency band
Pass	Pass
Result	
In any 100kHz bandwidth outside the frequency band, the radio frequency power is at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power.	

CH03 (Lower)

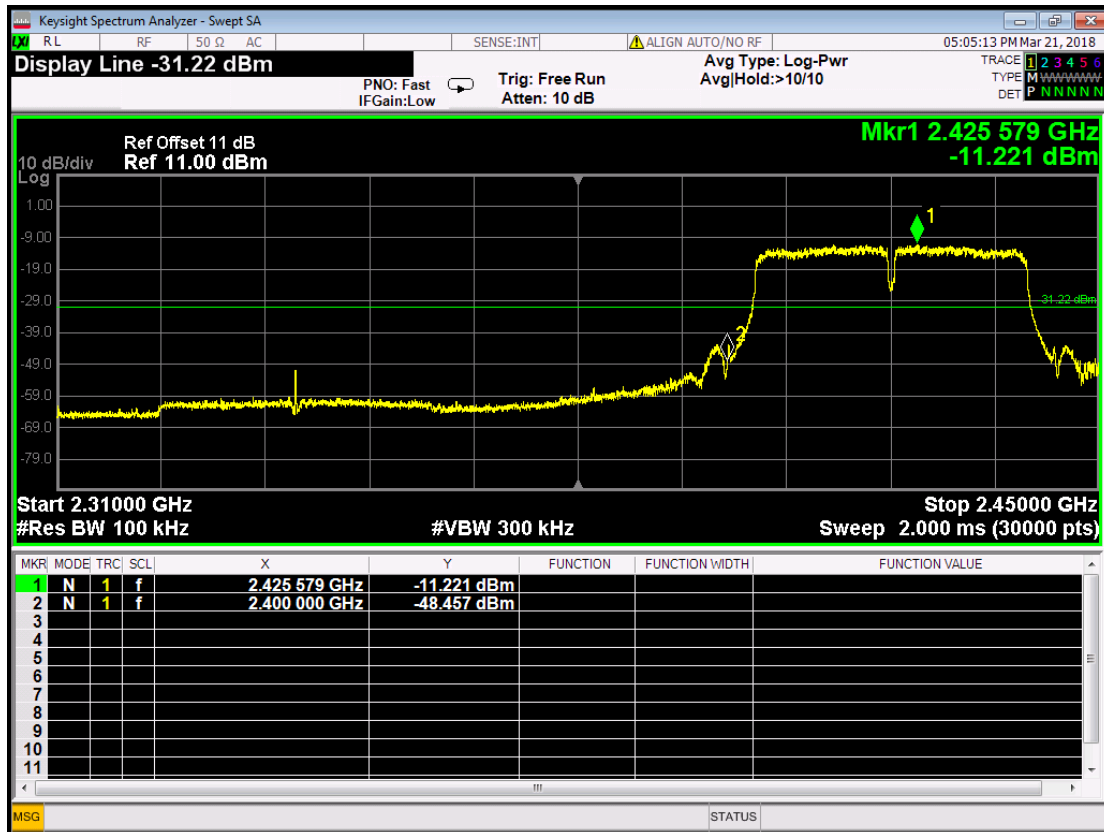

CH 09(Upper)

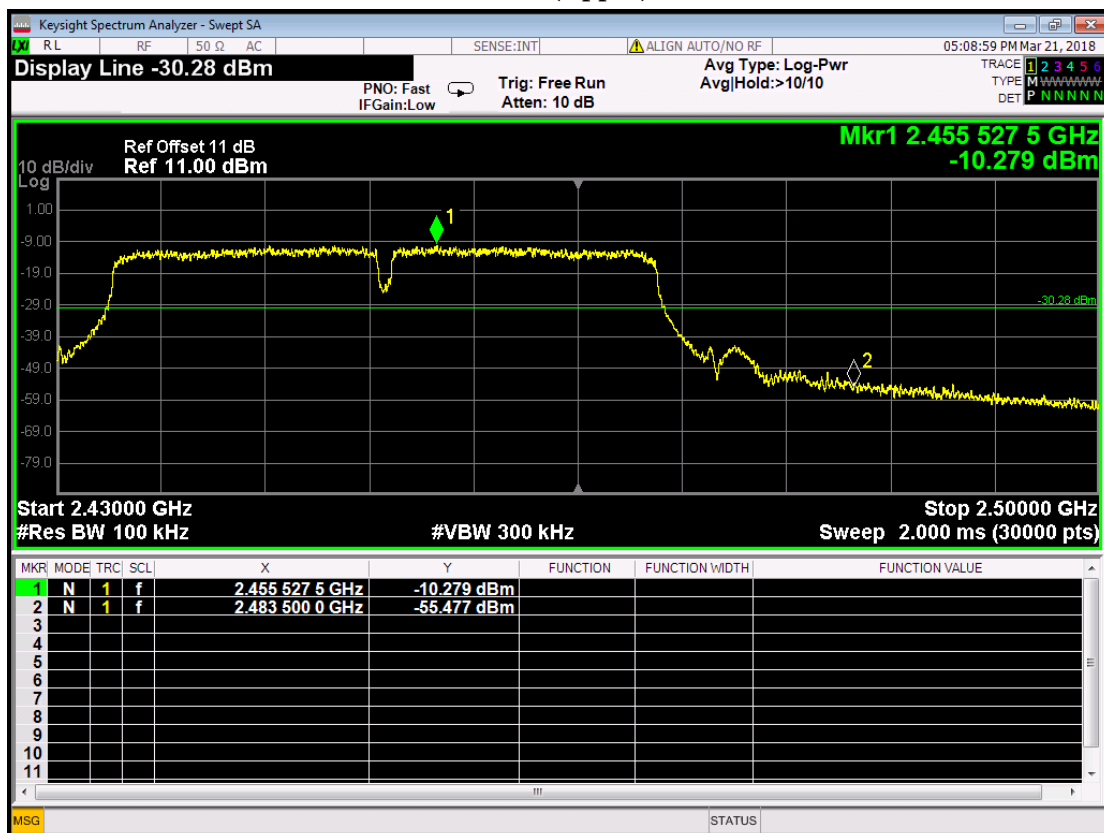

EUT :	液晶顯示器	Model Name :	LE65K6500U
Temperature :	25 °C	Relative Humidity :	60%

9. ANTENNA REQUIREMENT

9.1 STANDARD REQUIREMENT

3.10.1 requirement: Systems operating in the 2400-2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6dBi.

9.2 EUT ANTENNA

The antenna is embedded antenna and no consideration of replacement. Antenna max gain is 0.6 dBi from 2.4GHz to 2.5GHz.

10. EUT TEST PHOTO

**Radiated Measurement Photos
30MHz-1GHz**



**Radiated Measurement Photos
1GHz-18GHz**



The photograph shows a large flat-screen television mounted on a wooden stand. To the left, a spectrum analyzer sits on a wooden cabinet, with various cables connected to it. A technical diagram is visible on the wall behind the television. The setup is in a laboratory environment, likely for electromagnetic compatibility testing.