

Test Report No.50222674 001

Appendix D: Radiated and Mains Spurious Emission Data



(File: 50222674AppendixD)

Contents



Spurious Emissions, Band Edges, 2.35-2.5G	2
Spurious Emissions, TX Mode, 1-18G	14
Spurious Emissions, TX Mode, 18-26G	32
Spurious Emissions, TX Mode, 30M-1G	50
Spurious Emissions, TX Mode, 9k-30M	52
Spurious Emissions, RX Mode, 1-18G	54
Spurious Emissions, RX Mode, 18-26G	56
Spurious Emissions, RX Mode, 30M-1G	58
Spurious Emissions, RX Mode, 9K-30M	60

Radiated Bandedge 11b

Low Channel (Hor) 2412

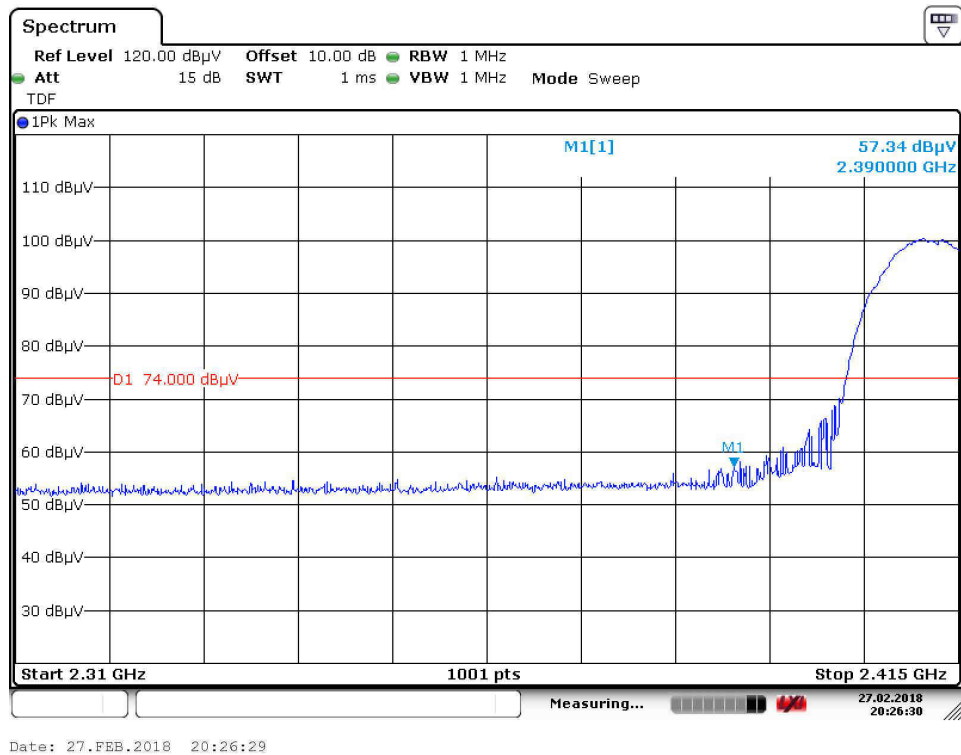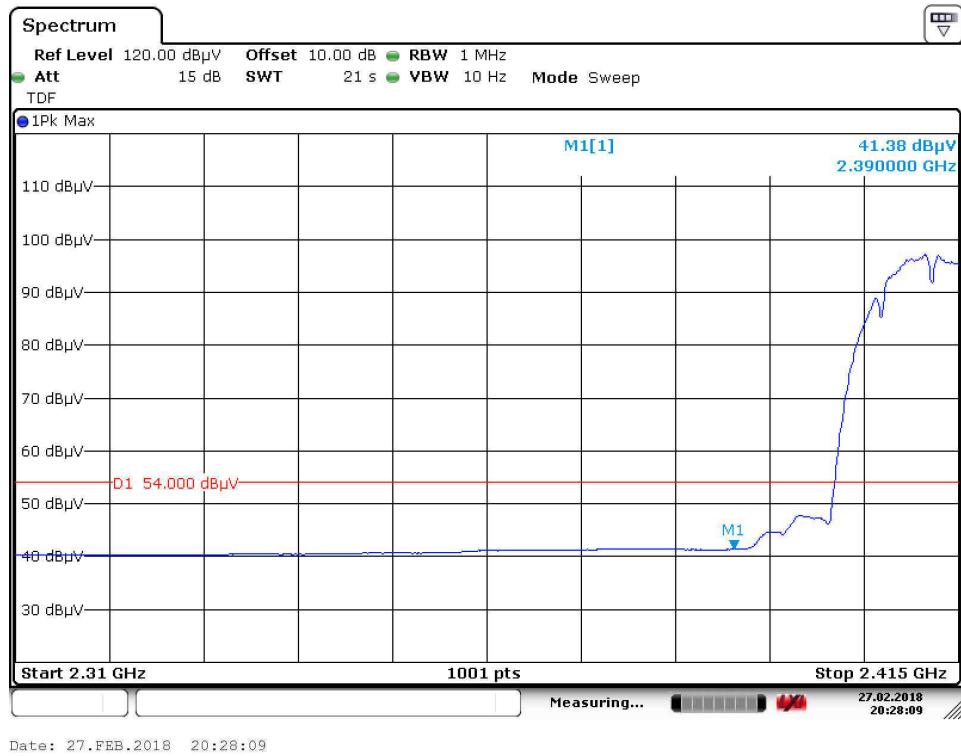



Low Channel (Ver) 2412

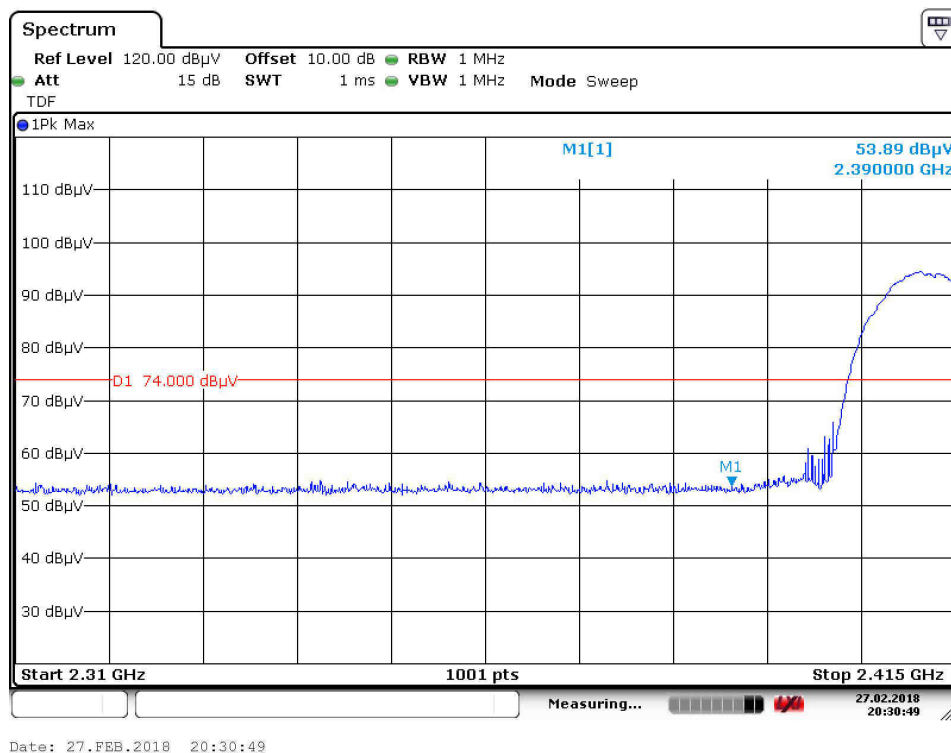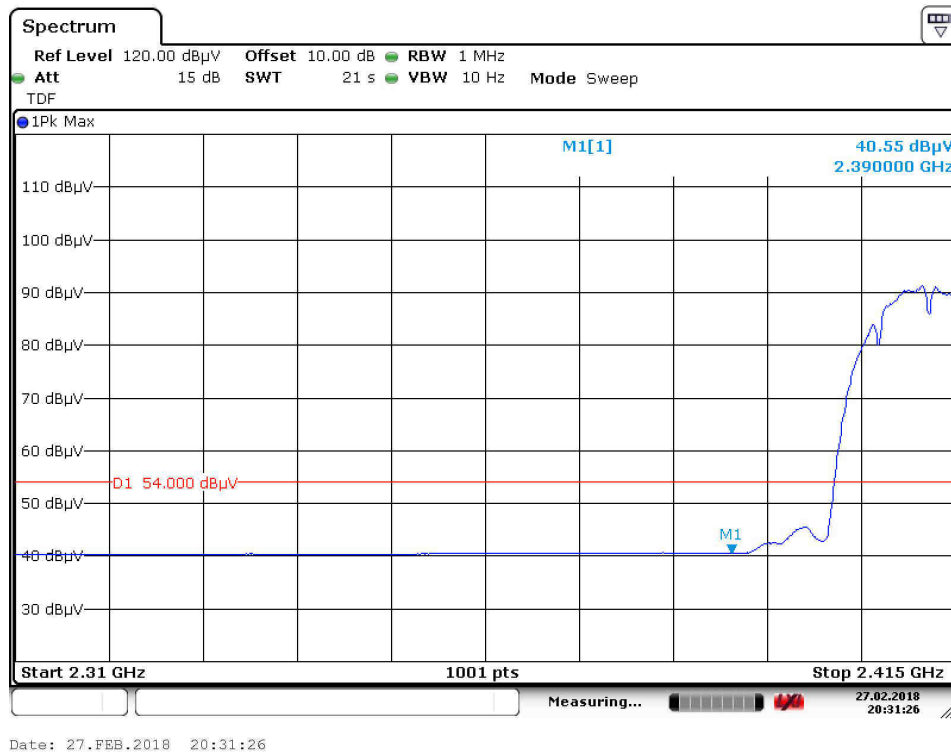

Spurious Emissions, Band Edge, 2.35-2.5G



Radiated Bandedge 11b

High Channel (Hor) 2462

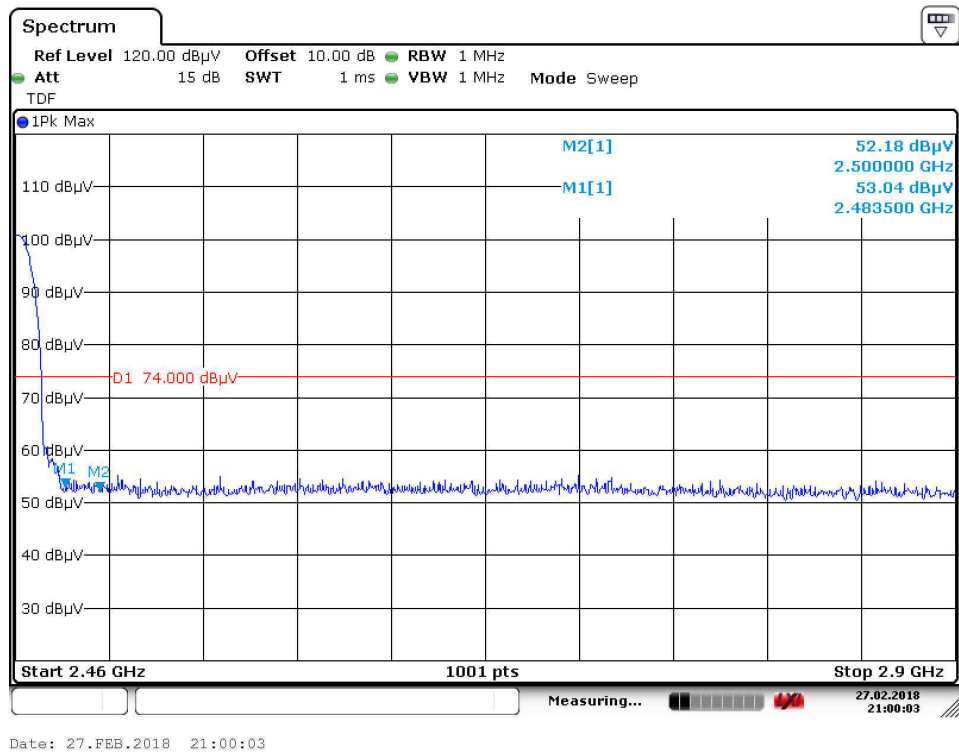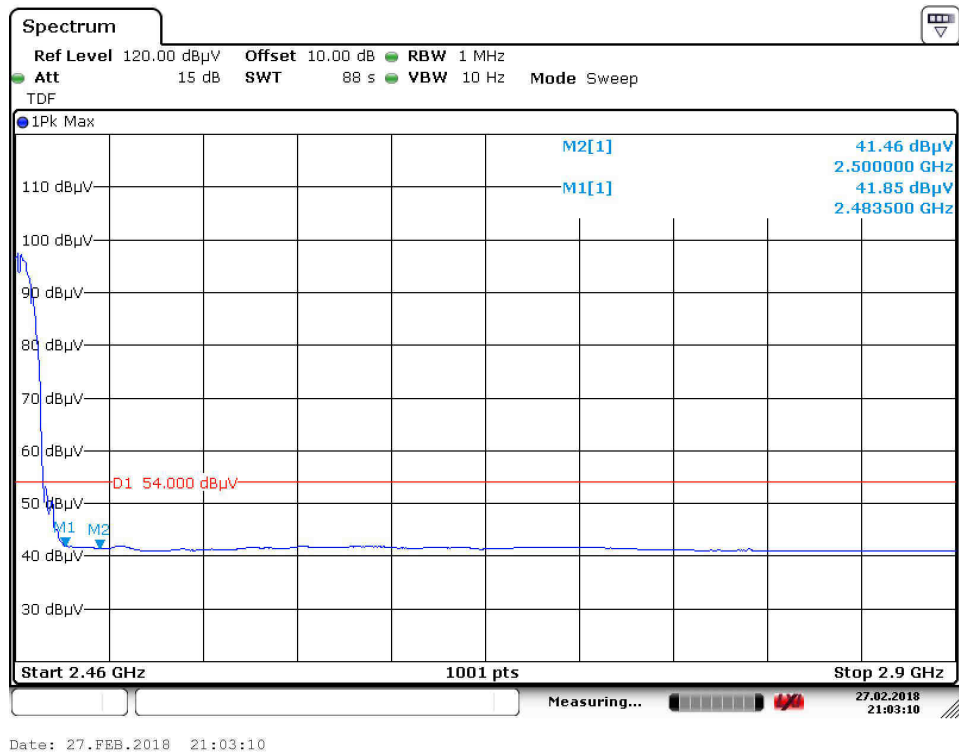



Spurious Emissions, Band Edge, 2.35-2.5G

High Channel (Ver) 2462

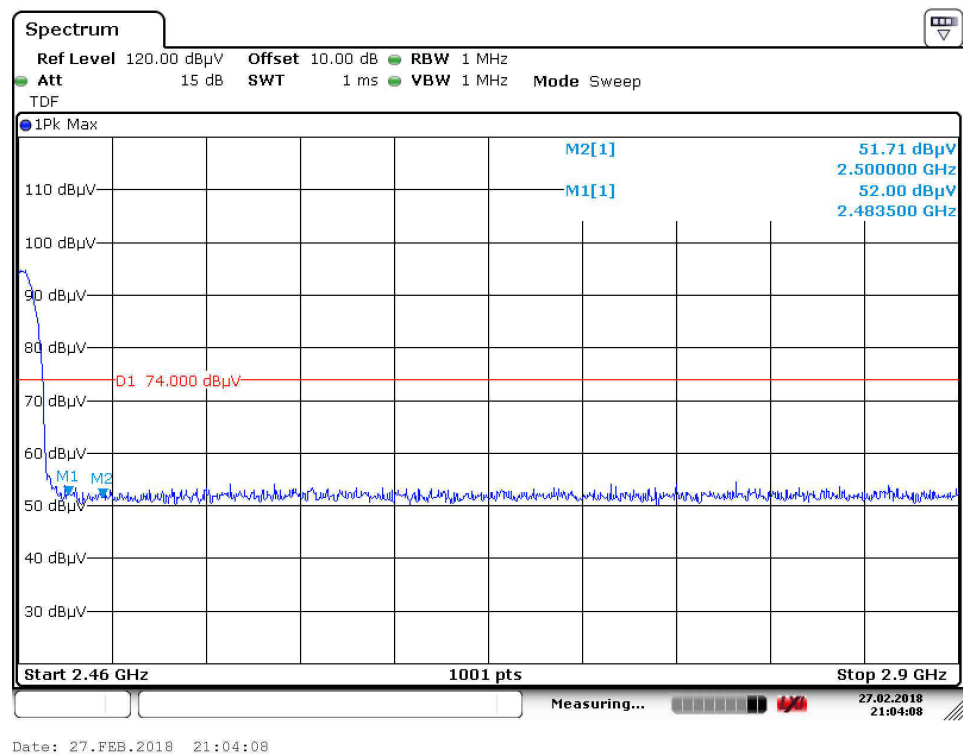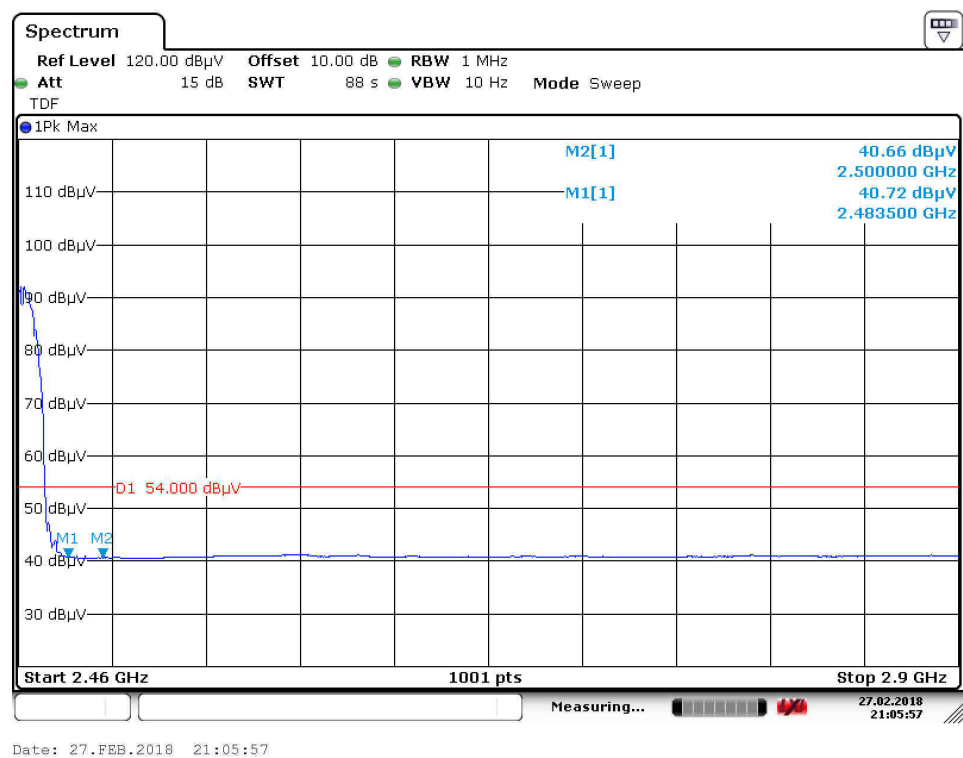



Radiated Bandedge 11g

High Channel (Hor) 2412

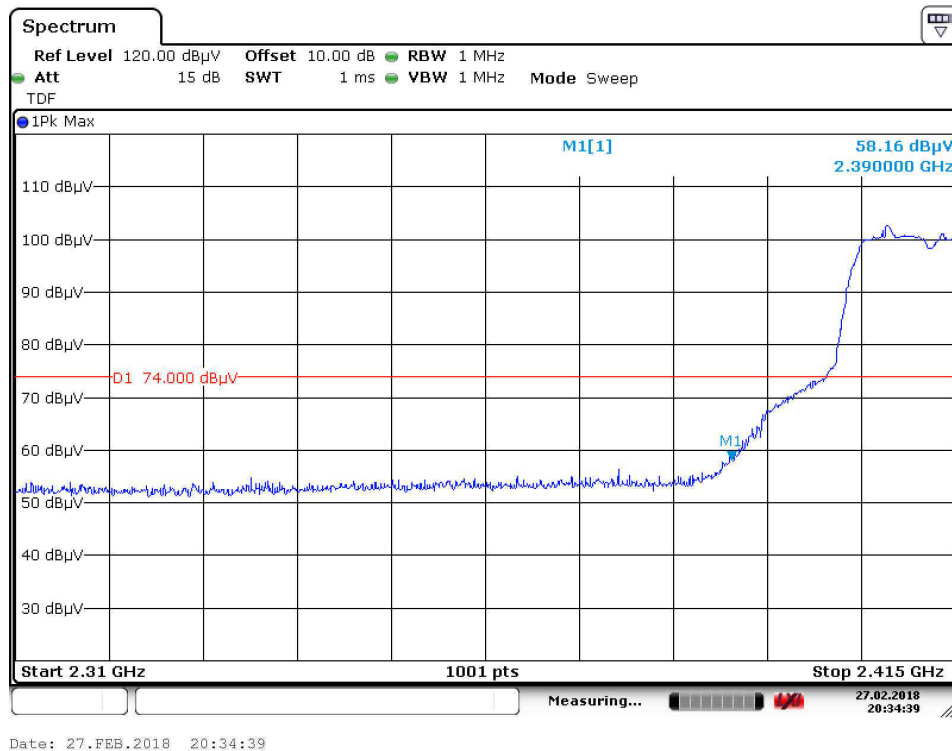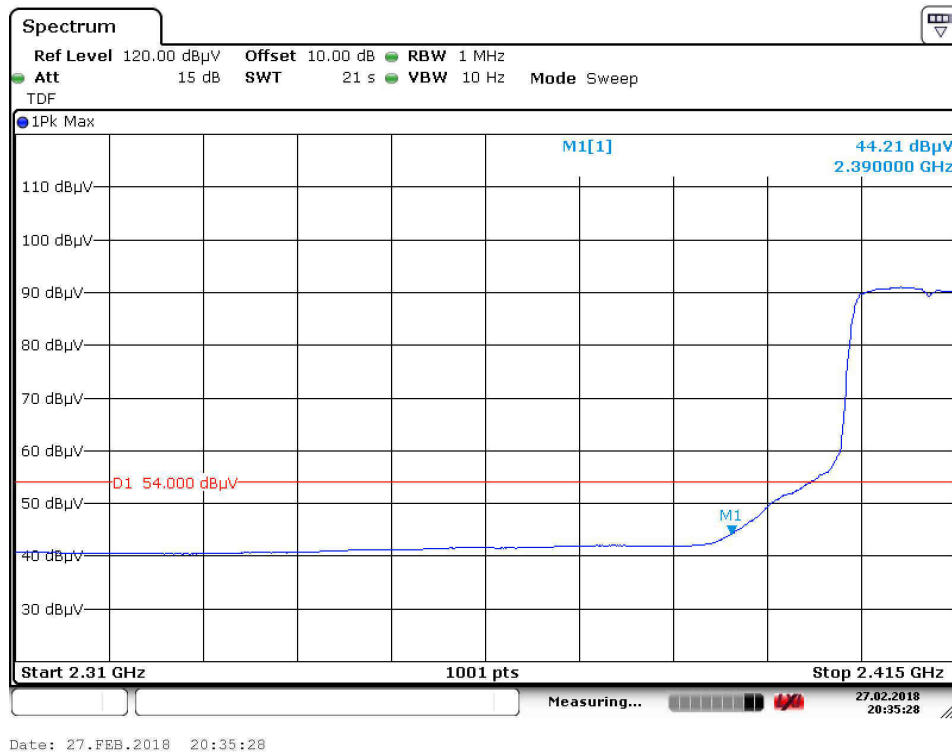



Spurious Emissions, Band Edge, 2.35-2.5G

High Channel (Ver) 2412

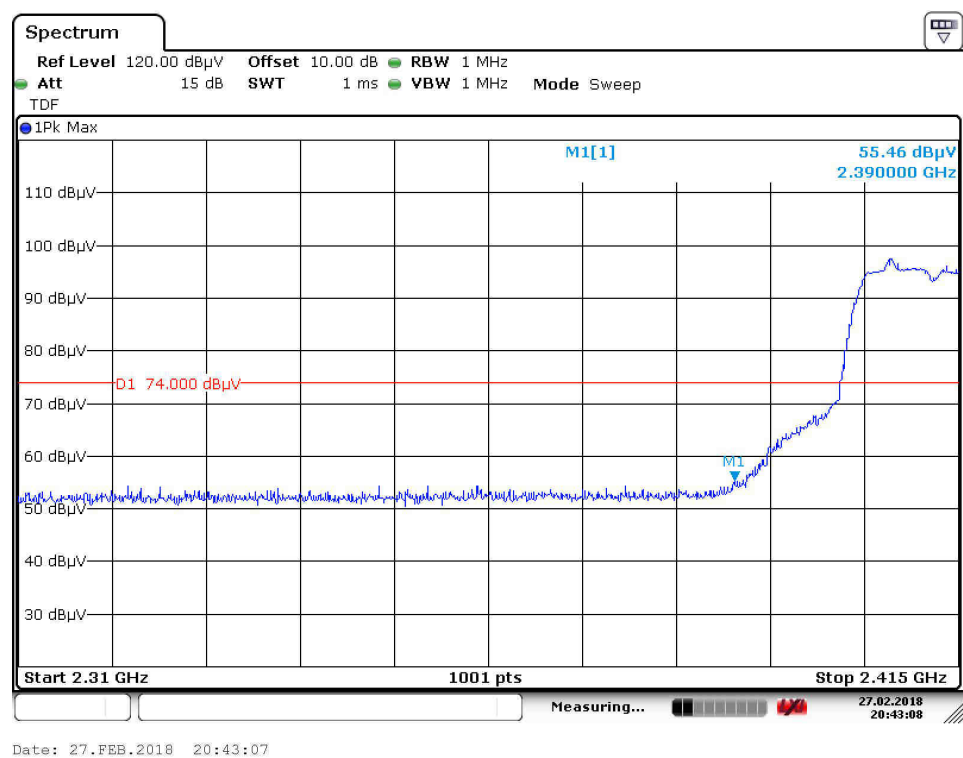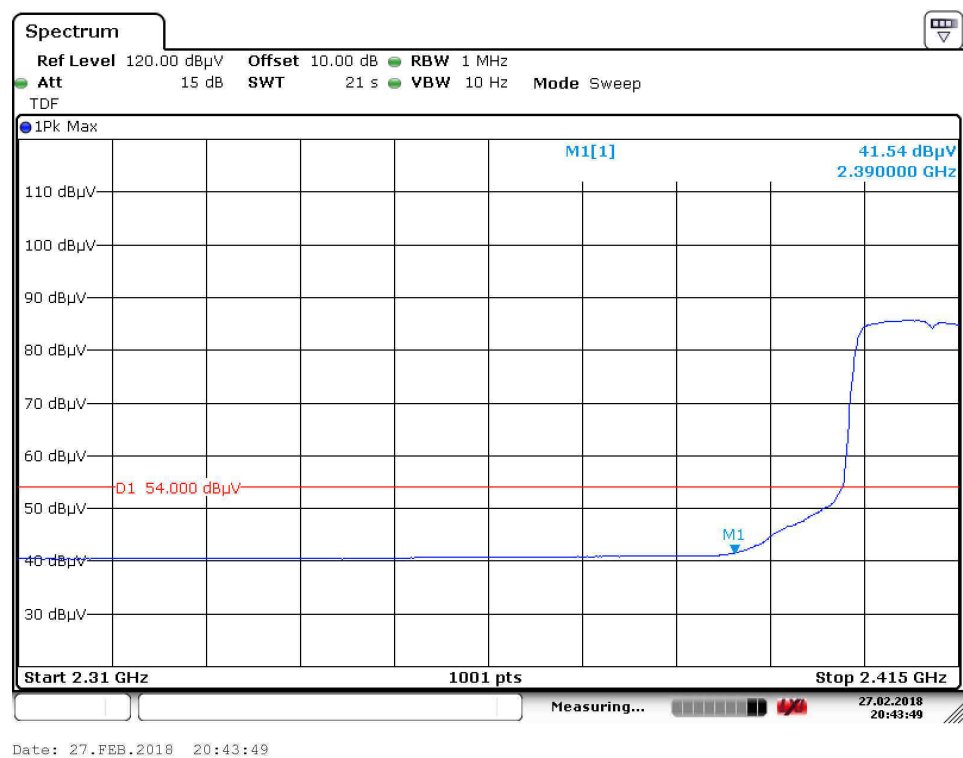



Radiated Bandedge 11g

High Channel (Hor) 2462

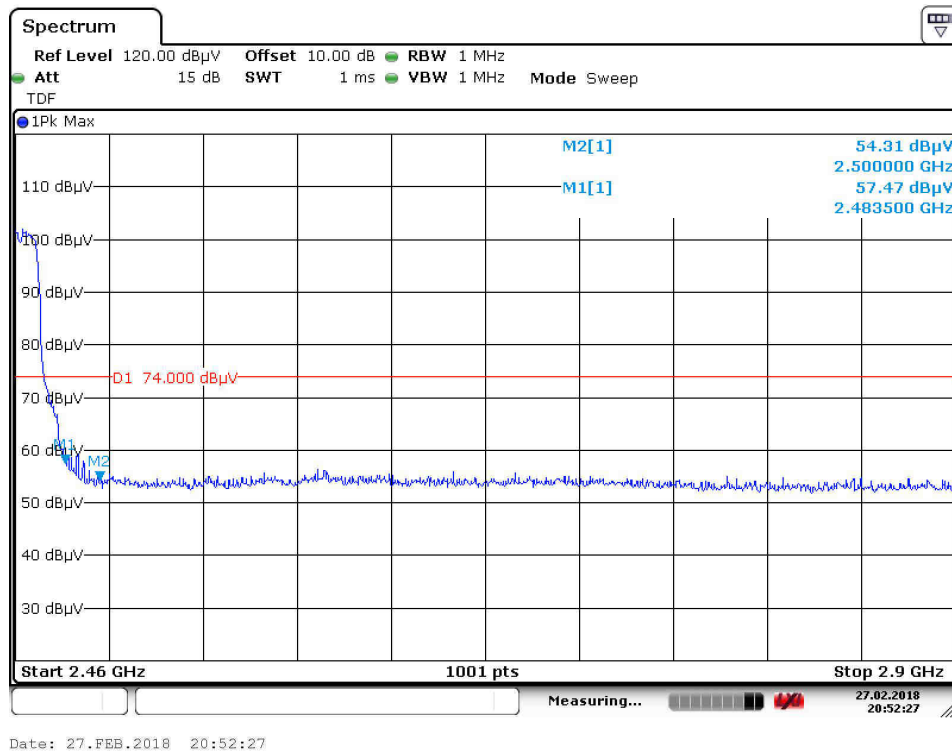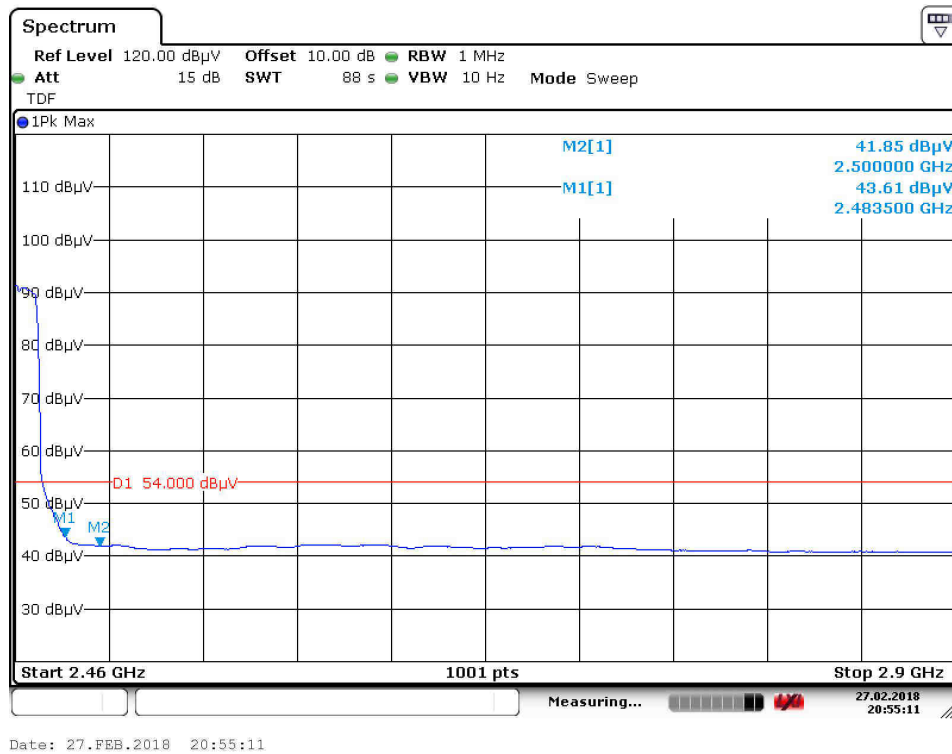



Spurious Emissions, Band Edge, 2.35-2.5G

High Channel (Ver) 2462

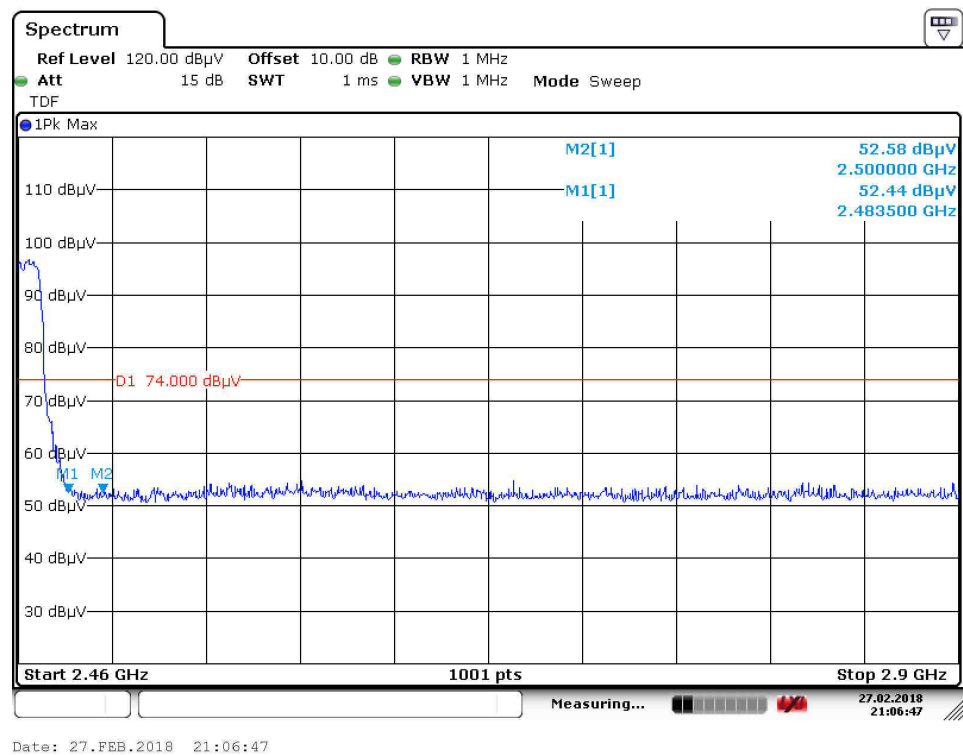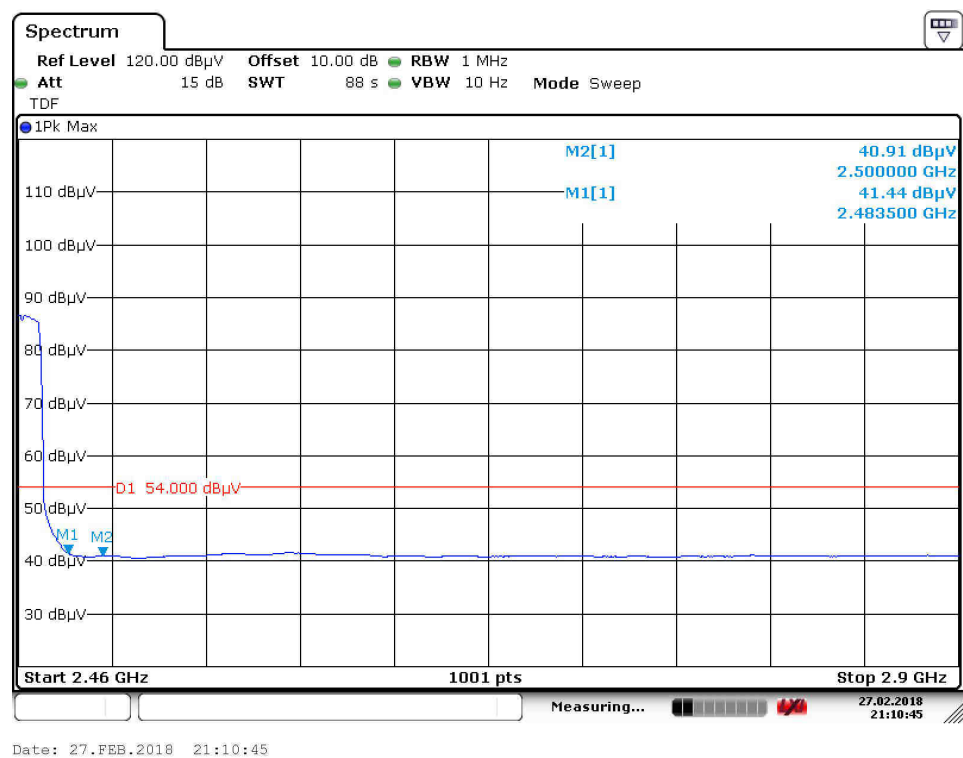



Radiated Bandedge HT20

High Channel (Hor) 2412

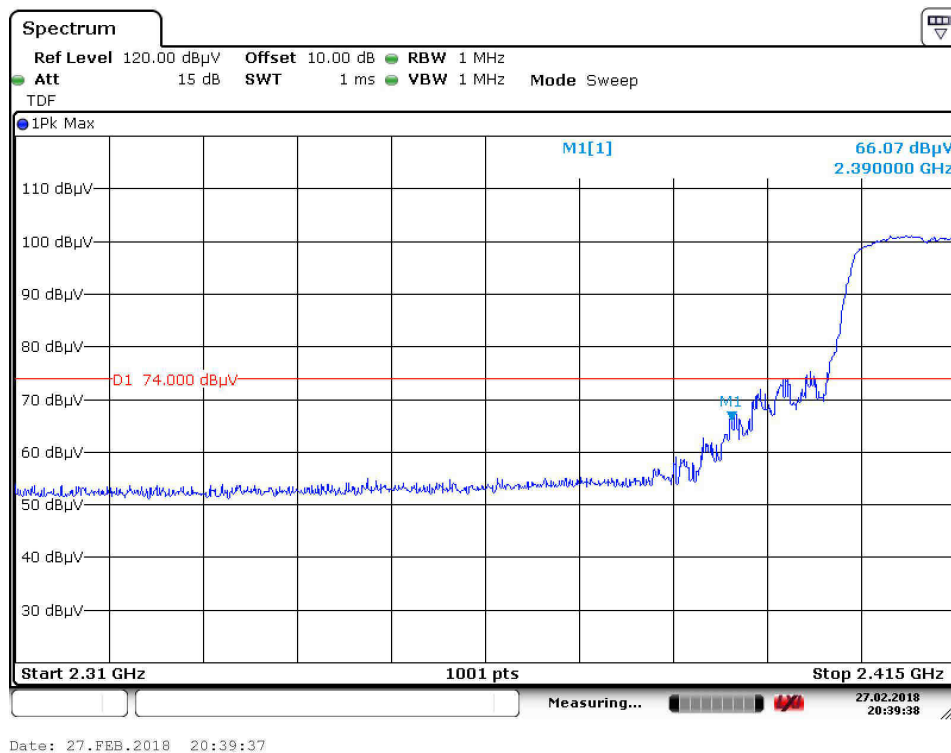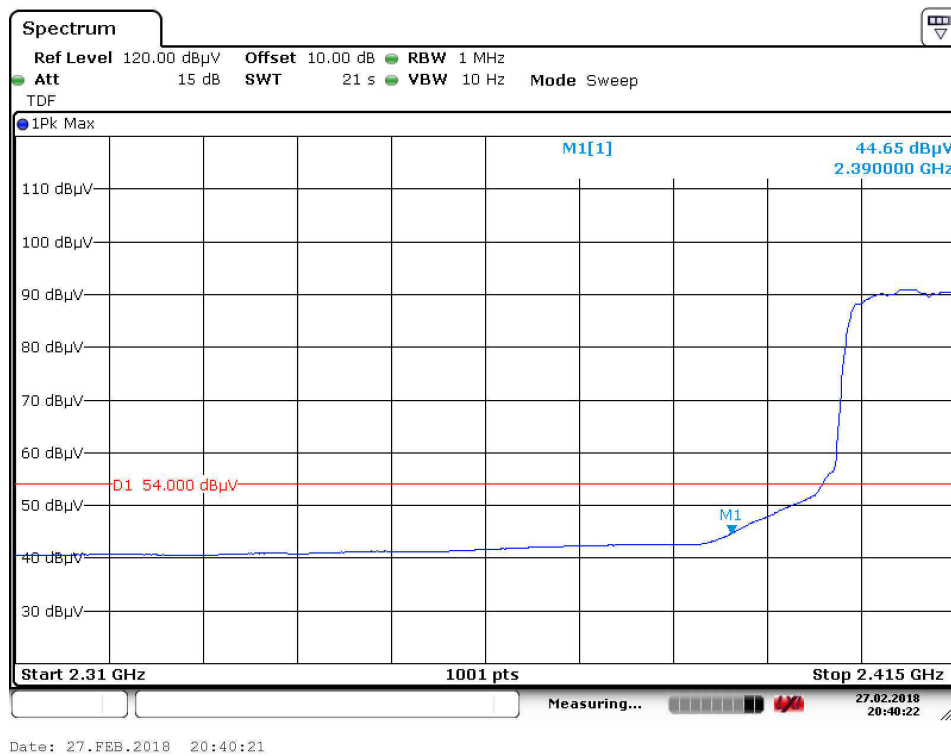

Spurious Emissions, Band Edge, 2.35-2.5G



High Channel (Ver) 2412

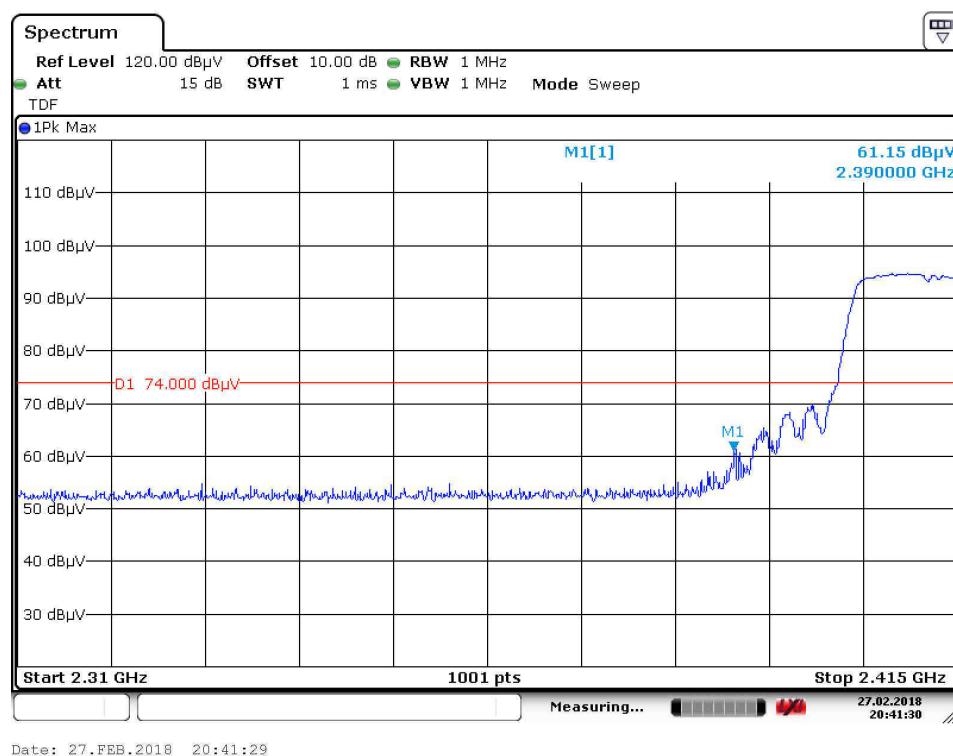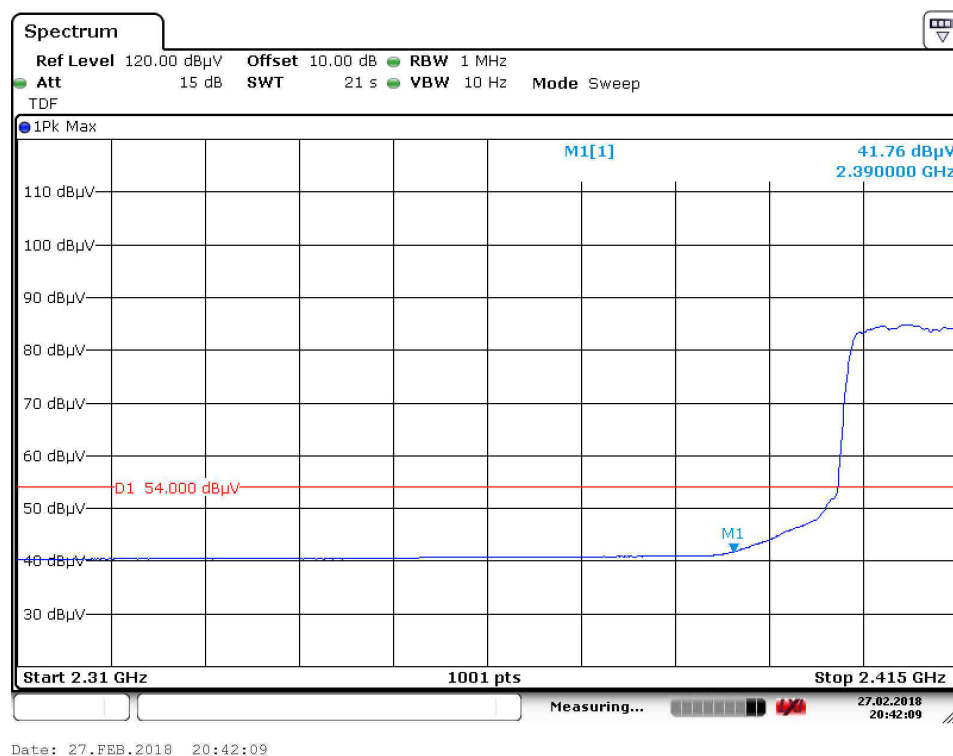

Spurious Emissions, Band Edge, 2.35-2.5G



Radiated Bandedge HT20

High Channel (Hor) 2412

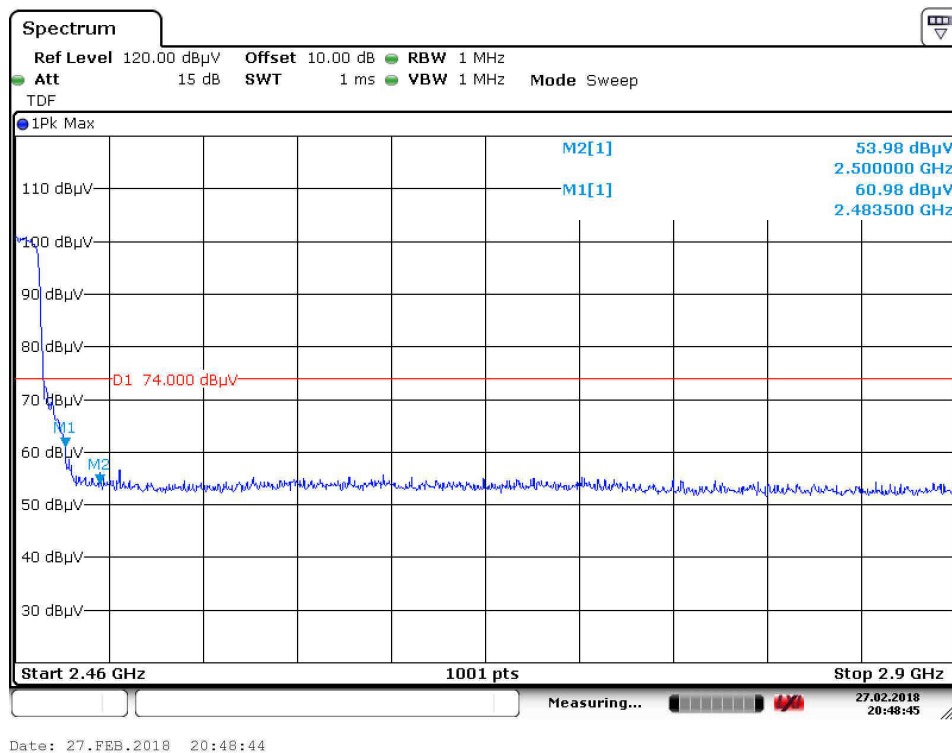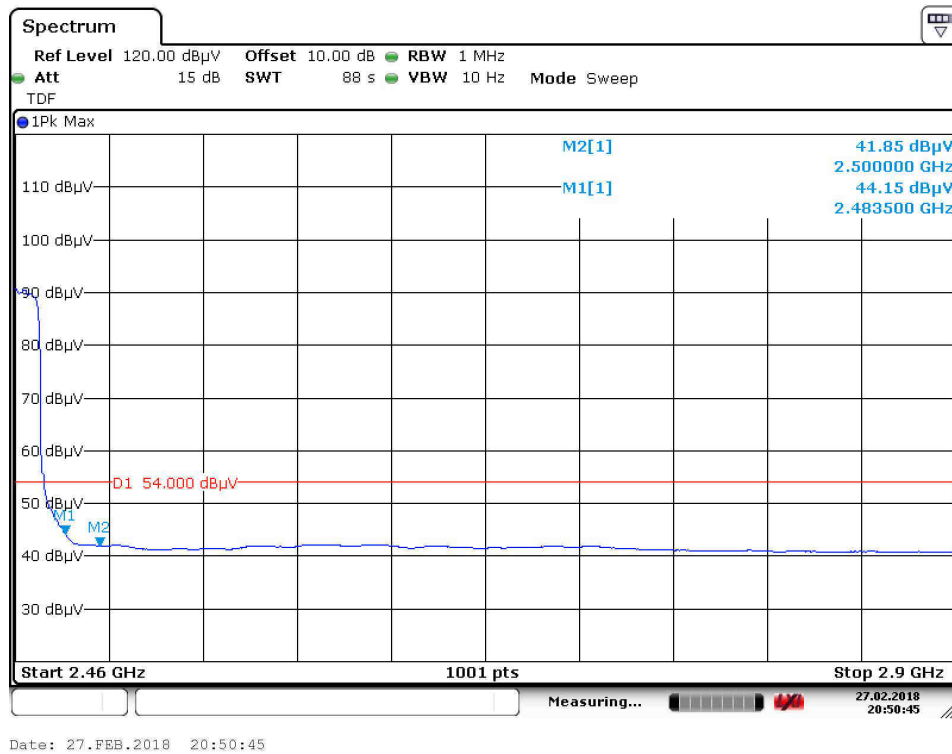

Spurious Emissions, Band Edge, 2.35-2.5G

High Channel (Ver) 2412

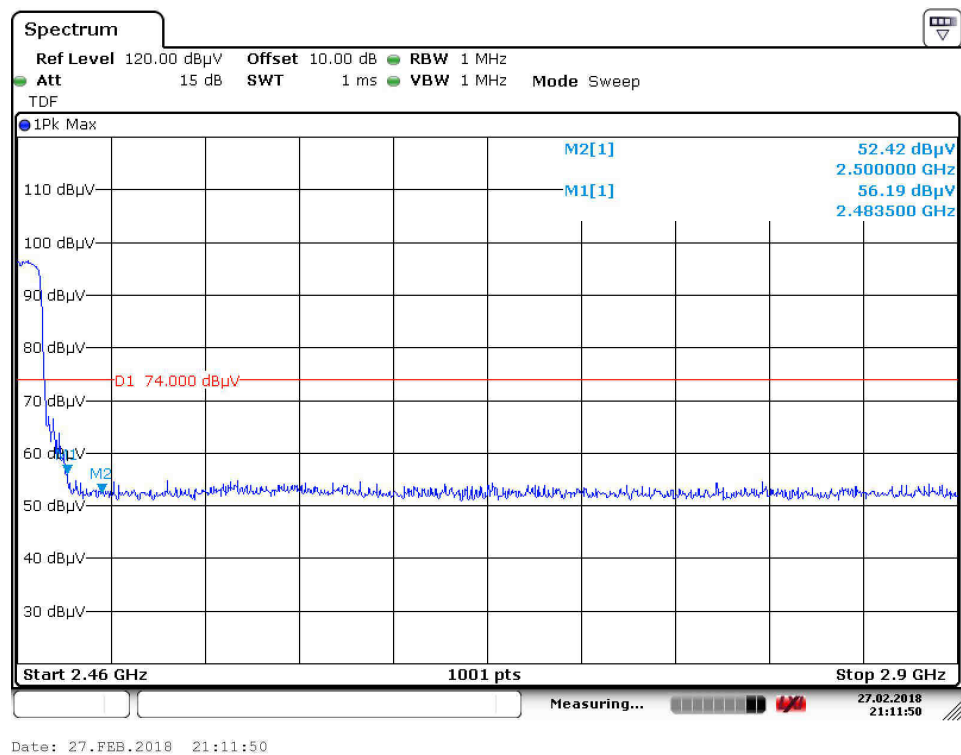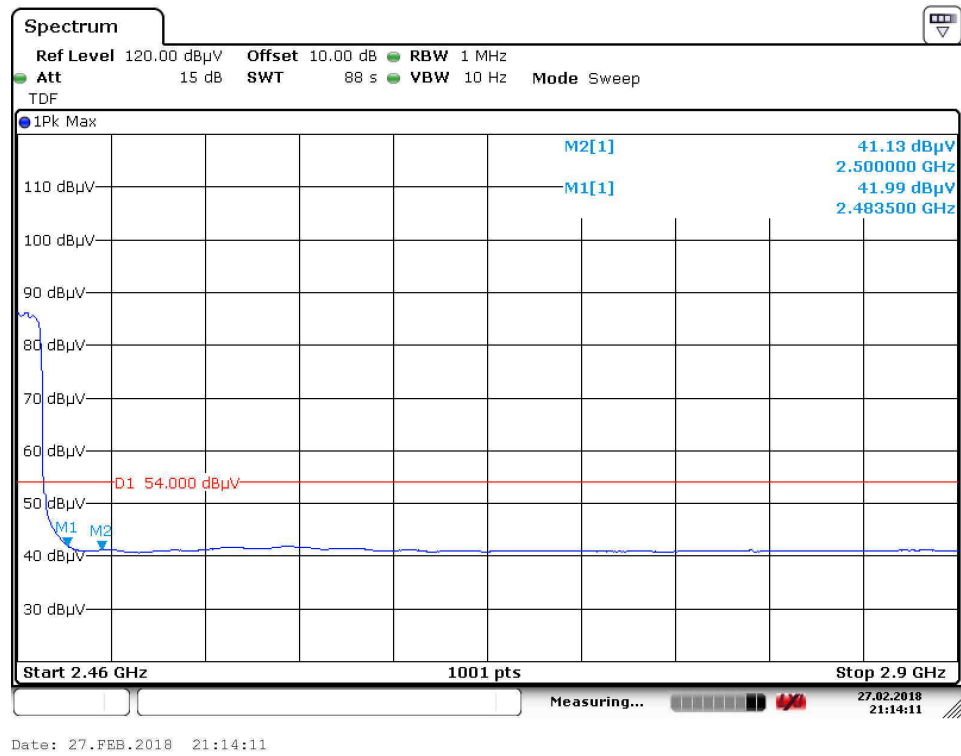

Spurious Emissions, Band Edge, 2.35-2.5G


Spurious Emissions, TX Mode, 1-18G



TUV Rheinland Taiwan Ltd.


11F., No.758, Sec.4 Bade Road. Songshan Dist, Taipei City 105

Tel:+886-2172-7000 fax:+886-2528-0018

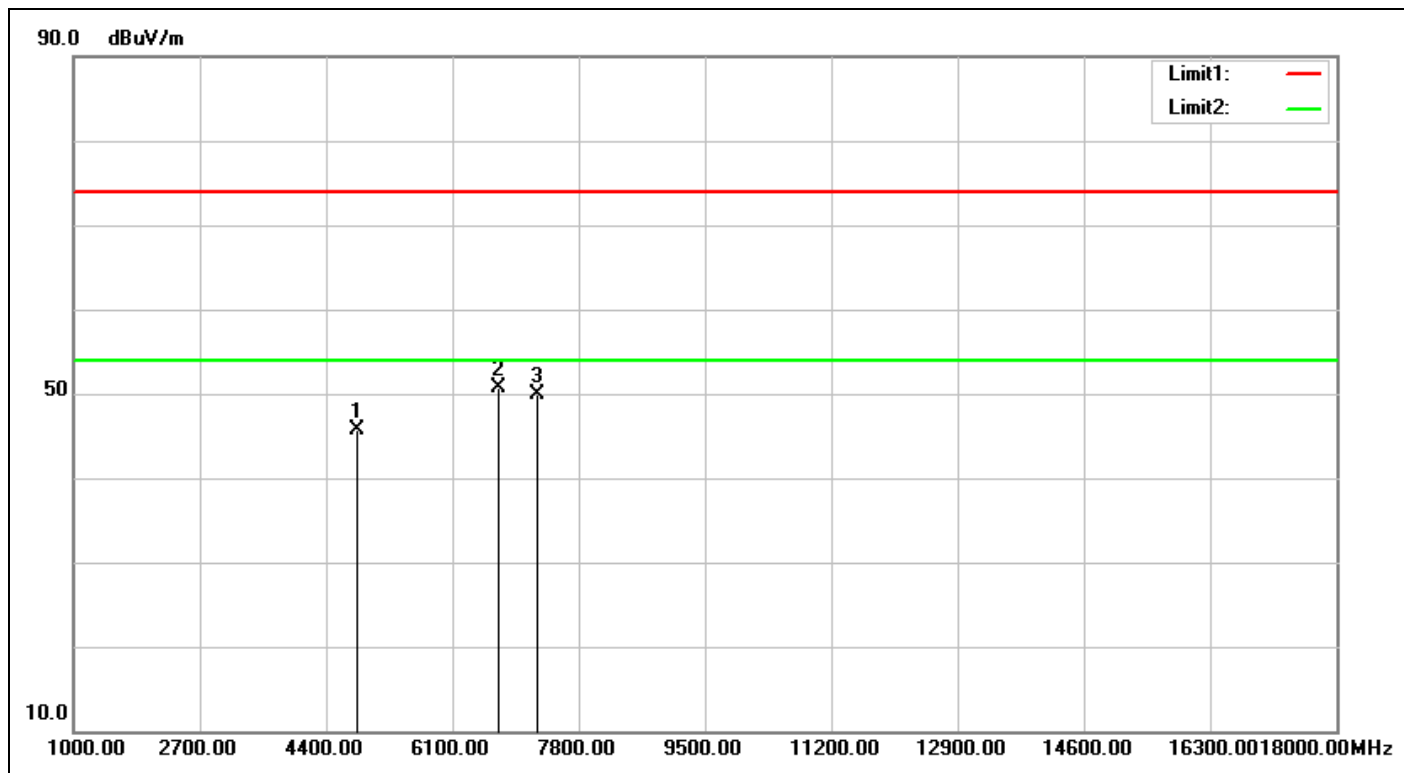


Service No.:	114056074(FERRARI NIT)-NCC-WIFI	Test Distance:	3m
Test Standard:	NCC Above 1G PEAK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2018/3/1 19:52:43
Applicant:	Delphi Deutschland GmbH	Test Rating:	DC 12V
Product:	Head Unit	Temp.(°C)/Hum.(%):	20.2(°C)/56%
Model No.:	FERRARI NIT	Test Engineer:	Amy Hsu
Test Mode:	B-2412-TX		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	4824.000	-2.66	48.46	45.80	74.00	-28.20	peak	100	154	
2	6729.000	5.07	45.70	50.77	74.00	-23.23	peak	100	268	
3	7236.000	5.32	44.49	49.81	74.00	-24.19	peak	100	281	

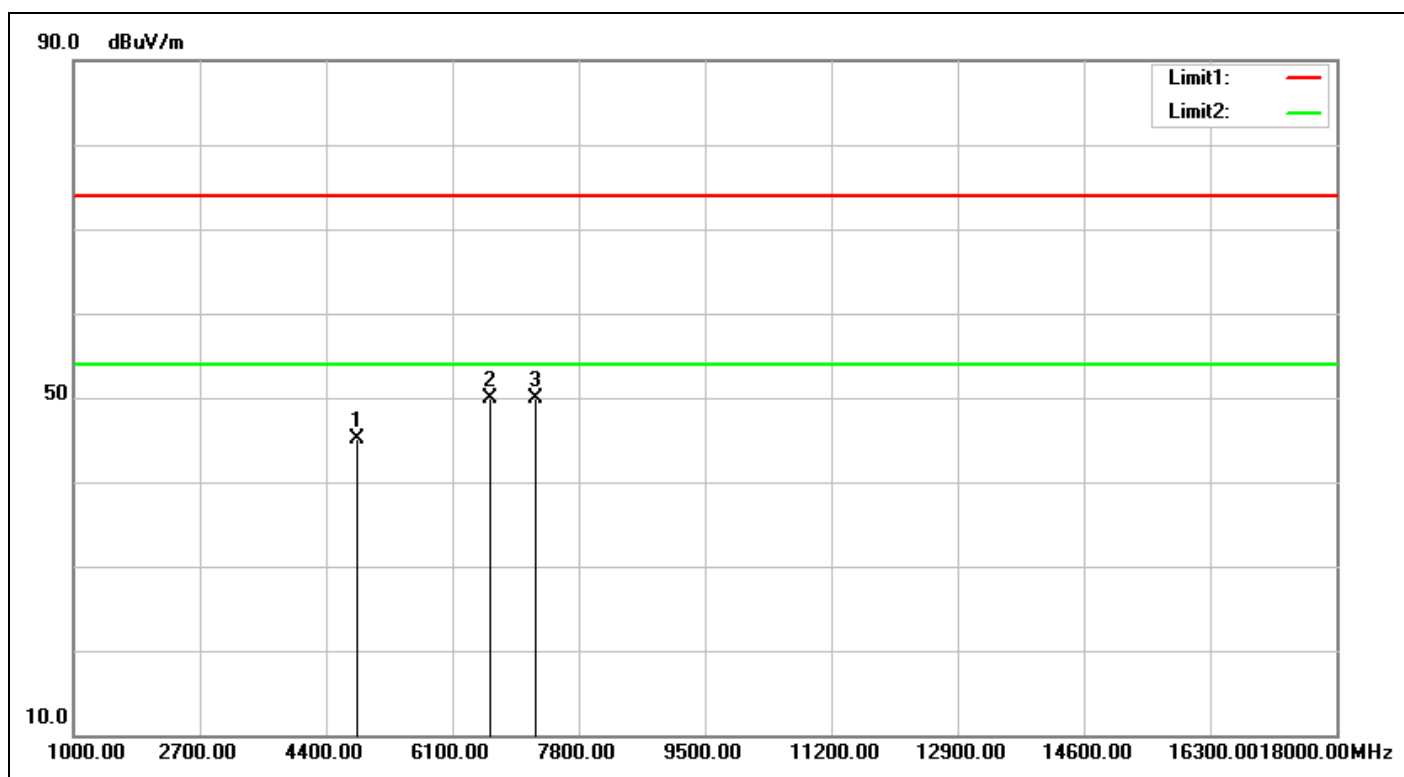


Service No.:	114056074(FERRARI NIT)-NCC-WIFI	Test Distance:	3m
Test Standard:	NCC Above 1G PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2018/3/1 19:53:46
Applicant:	Delphi Deutschland GmbH	Test Rating:	DC 12V
Product:	Head Unit	Temp.(°C)/Hum.(%)	20.2(°C)/56%
Model No.:	FERRARI NIT	Test Engineer:	Amy Hsu
Test Mode:	B-2412-TX		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	4824.000	-2.66	47.70	45.04	74.00	-28.96	peak	100	195	
2	6610.000	5.23	44.60	49.83	74.00	-24.17	peak	100	251	
3	7236.000	5.32	44.63	49.95	74.00	-24.05	peak	100	208	

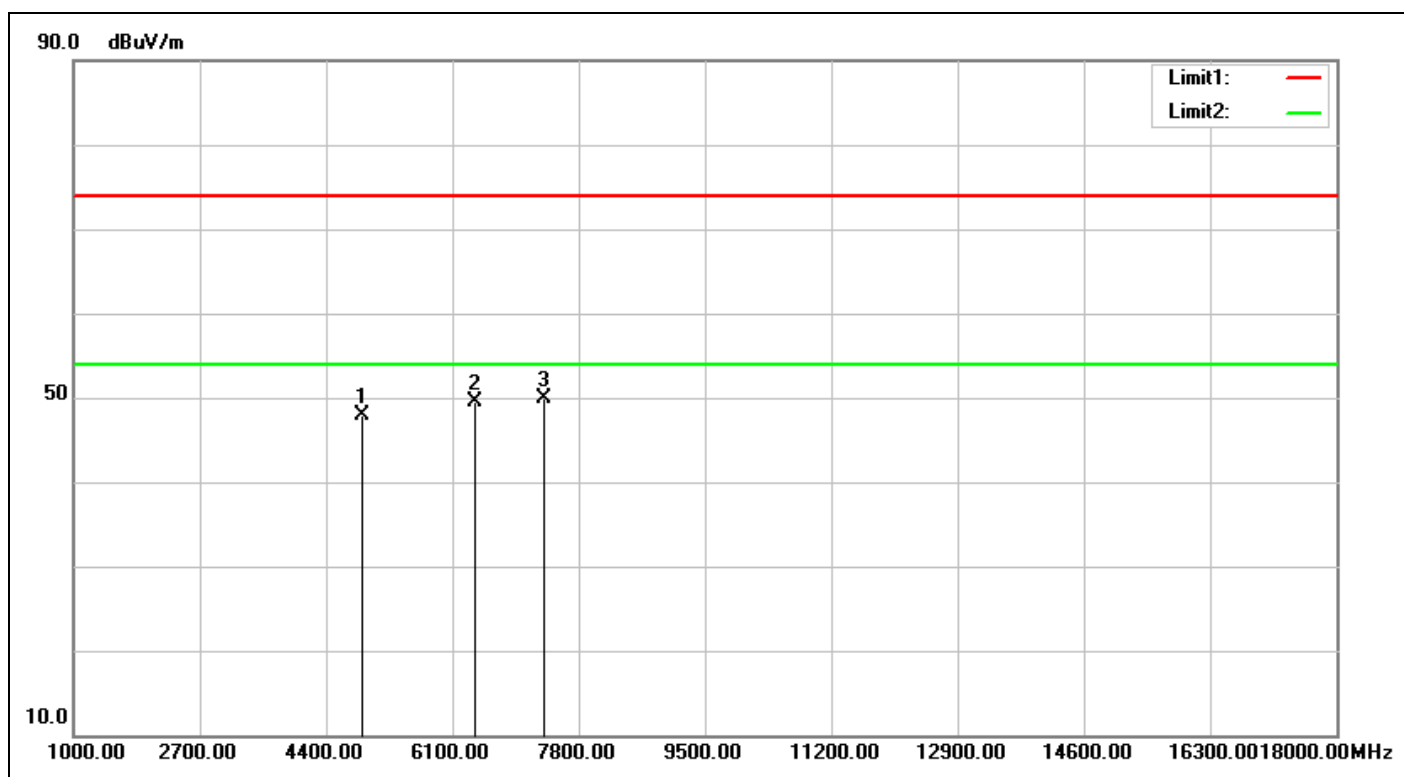


Service No.:	114056074(FERRARI NIT)-NCC-WIFI	Test Distance:	3m
Test Standard:	NCC Above 1G PEAK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2018/3/1 19:56:11
Applicant:	Delphi Deutschland GmbH	Test Rating:	DC 12V
Product:	Head Unit	Temp.(°C)/Hum.(%)	20.2(°C)/56%
Model No.:	FERRARI NIT	Test Engineer:	Amy Hsu
Test Mode:	B-2437-TX		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	4874.000	-2.53	50.40	47.87	74.00	-26.13	peak	100	285	
2	6406.000	4.99	44.49	49.48	74.00	-24.52	peak	100	157	
3	7311.000	5.52	44.46	49.98	74.00	-24.02	peak	100	238	

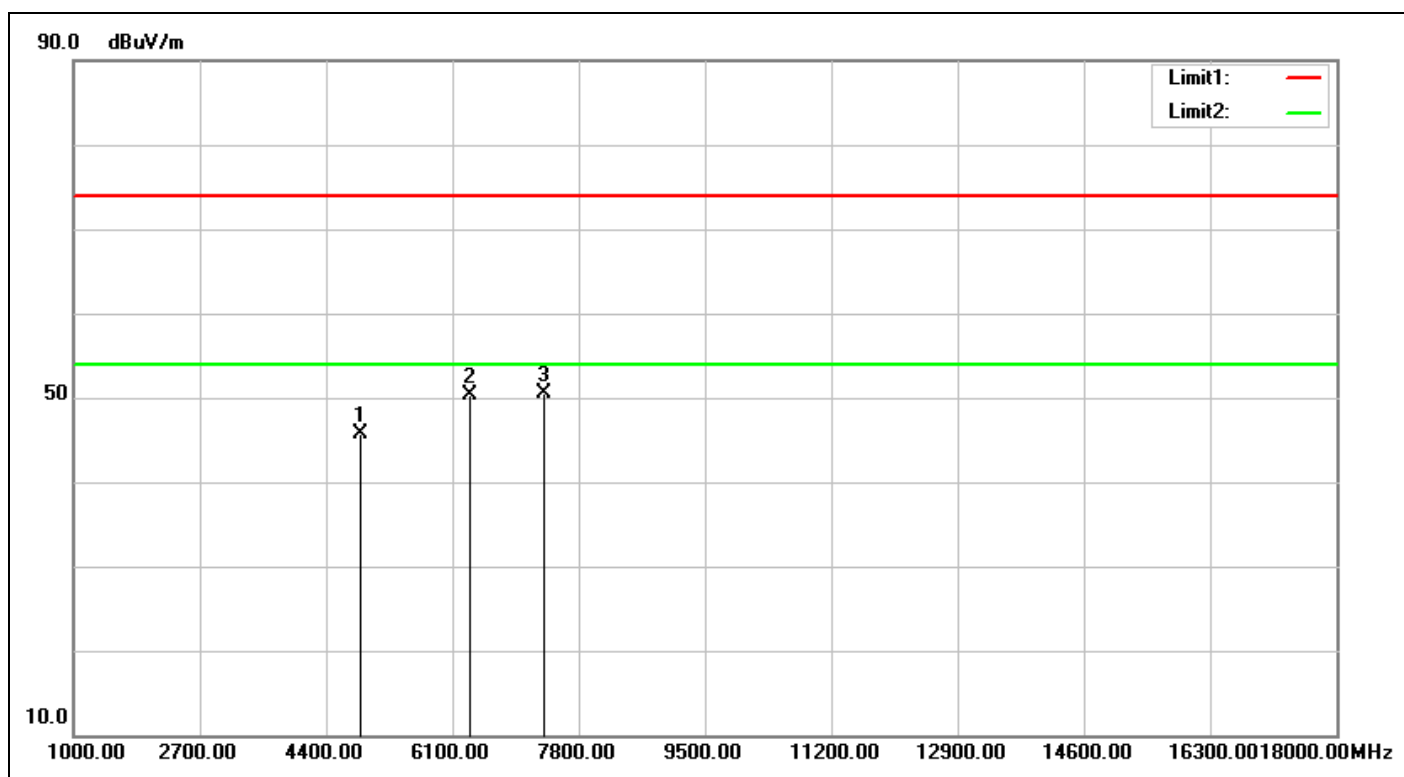


Service No.:	114056074(FERRARI NIT)-NCC-WIFI	Test Distance:	3m
Test Standard:	NCC Above 1G PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2018/3/1 19:57:13
Applicant:	Delphi Deutschland GmbH	Test Rating:	DC 12V
Product:	Head Unit	Temp.(°C)/Hum.(%)	20.2(°C)/56%
Model No.:	FERRARI NIT	Test Engineer:	Amy Hsu
Test Mode:	B-2437-TX		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	4874.000	-2.53	48.32	45.79	74.00	-28.21	peak	100	274	
2	6338.000	4.73	45.63	50.36	74.00	-23.64	peak	100	356	
3	7311.000	5.52	45.00	50.52	74.00	-23.48	peak	100	162	

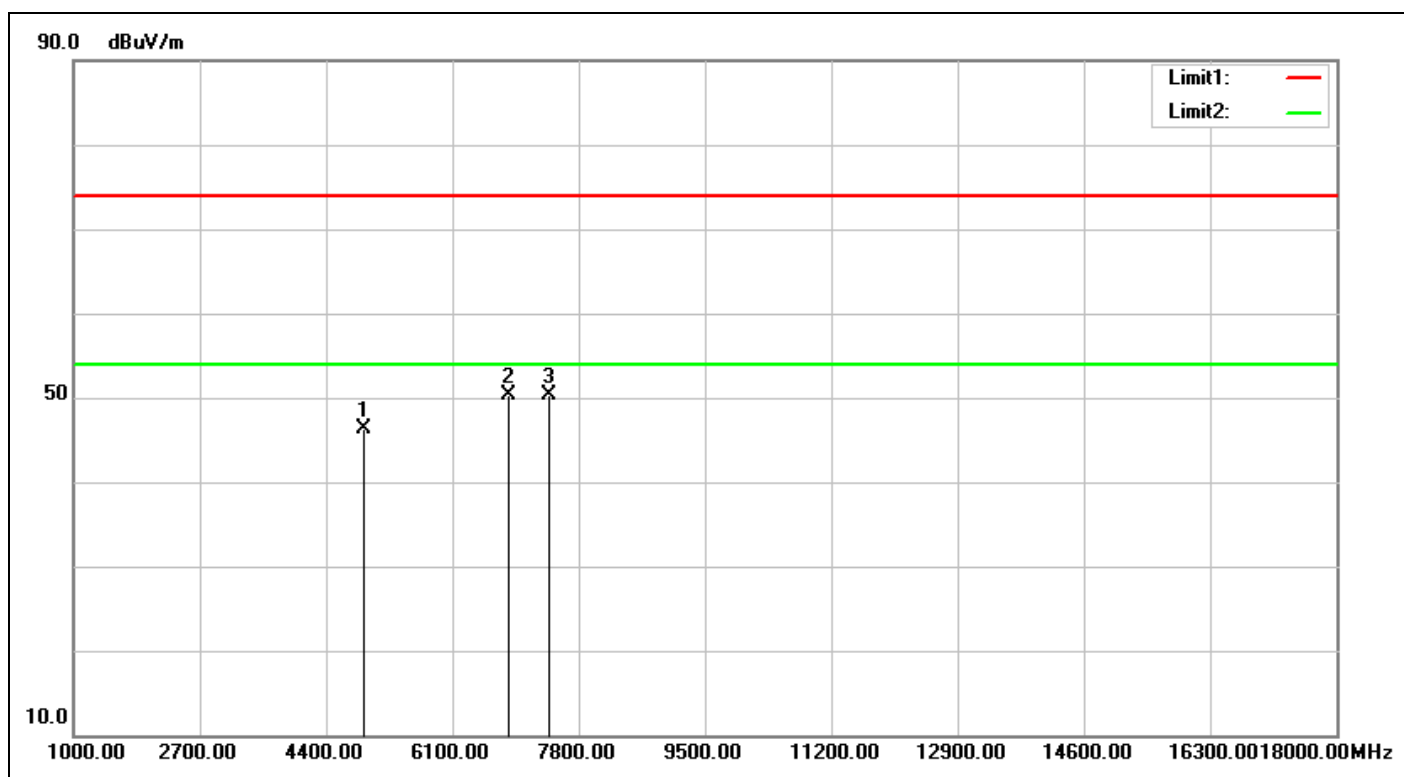


Service No.:	114056074(FERRARI NIT)-NCC-WIFI	Test Distance:	3m
Test Standard:	NCC Above 1G PEAK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2018/3/1 20:00:27
Applicant:	Delphi Deutschland GmbH	Test Rating:	DC 12V
Product:	Head Unit	Temp.(°C)/Hum.(%)	20.2(°C)/56%
Model No.:	FERRARI NIT	Test Engineer:	Amy Hsu
Test Mode:	B-2462-TX		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	4924.000	-2.39	48.76	46.37	74.00	-27.63	peak	100	116	
2	6848.000	4.93	45.39	50.32	74.00	-23.68	peak	100	156	
3	7386.000	5.70	44.54	50.24	74.00	-23.76	peak	100	219	

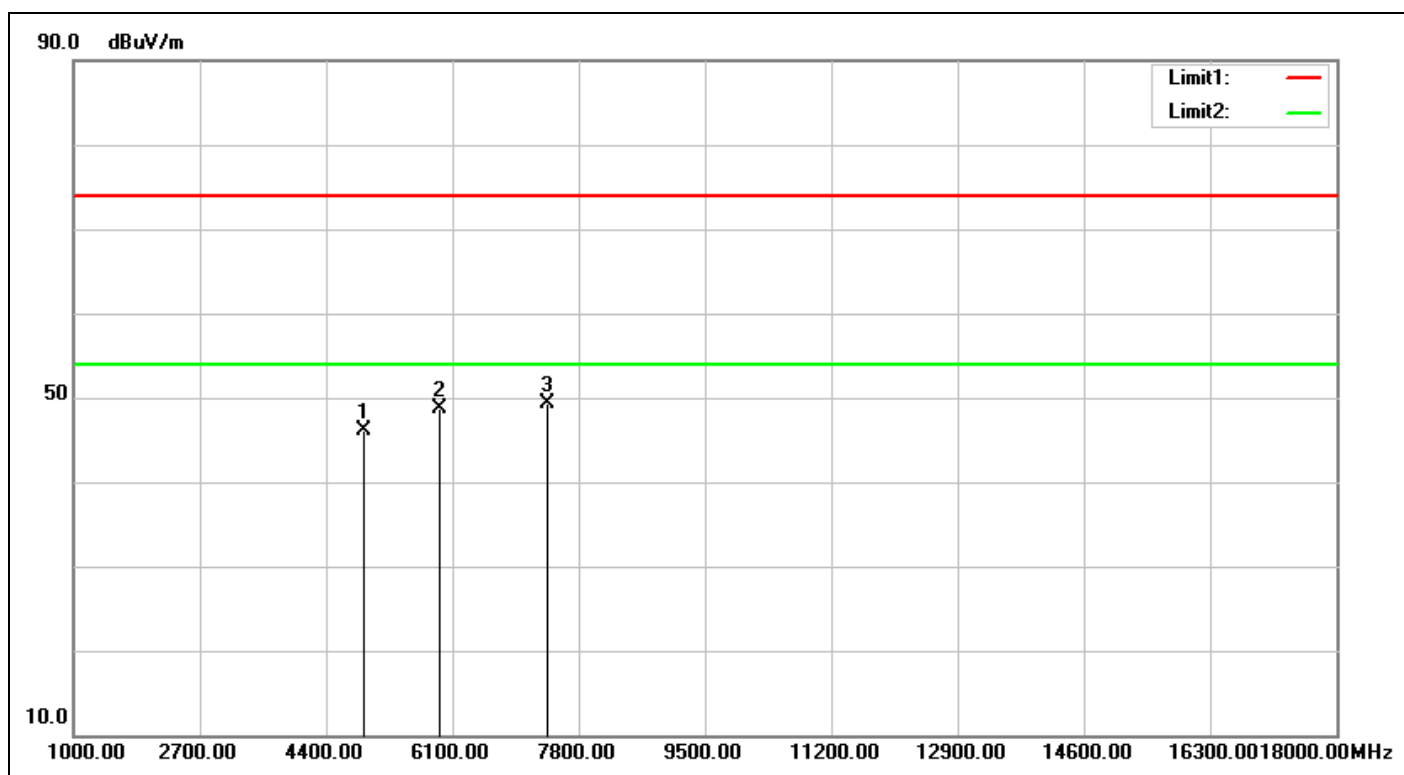


Service No.:	114056074(FERRARI NIT)-NCC-WIFI	Test Distance:	3m
Test Standard:	NCC Above 1G PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2018/3/1 20:01:30
Applicant:	Delphi Deutschland GmbH	Test Rating:	DC 12V
Product:	Head Unit	Temp.(°C)/Hum.(%)	20.2(°C)/56%
Model No.:	FERRARI NIT	Test Engineer:	Amy Hsu
Test Mode:	B-2462-TX		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	4924.000	-2.39	48.46	46.07	74.00	-27.93	peak	100	237	
2	5930.000	2.94	45.81	48.75	74.00	-25.25	peak	100	202	
3	7386.000	5.70	43.63	49.33	74.00	-24.67	peak	100	165	

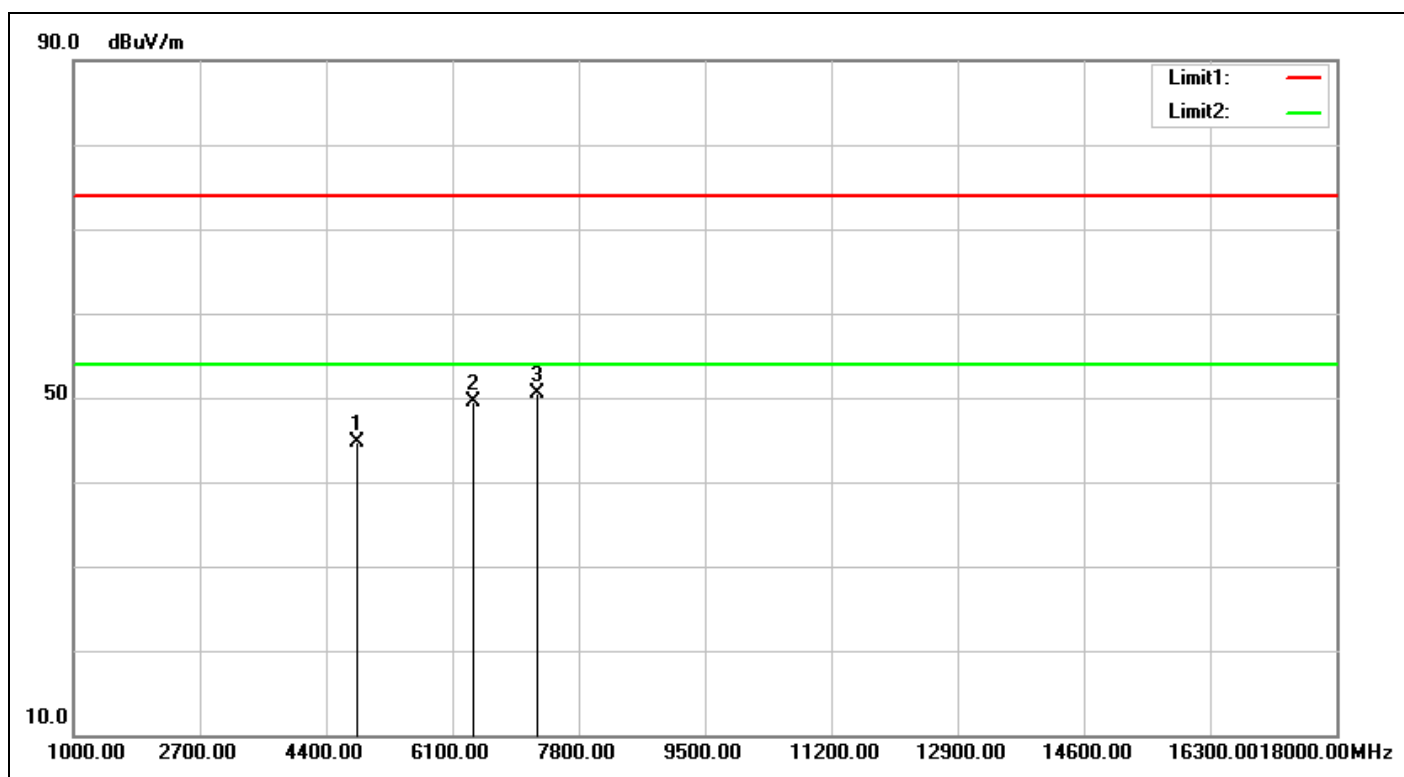


Service No.:	114056074(FERRARI NIT)-NCC-WIFI	Test Distance:	3m
Test Standard:	NCC Above 1G PEAK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2018/3/1 19:26:23
Applicant:	Delphi Deutschland GmbH	Test Rating:	DC 12V
Product:	Head Unit	Temp.(°C)/Hum.(%)	20.2(°C)/56%
Model No.:	FERRARI NIT	Test Engineer:	Amy Hsu
Test Mode:	G-2412-TX		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	4824.000	-2.66	47.45	44.79	74.00	-29.21	peak	100	152	
2	6389.000	4.93	44.57	49.50	74.00	-24.50	peak	100	132	
3	7236.000	5.32	45.13	50.45	74.00	-23.55	peak	100	105	

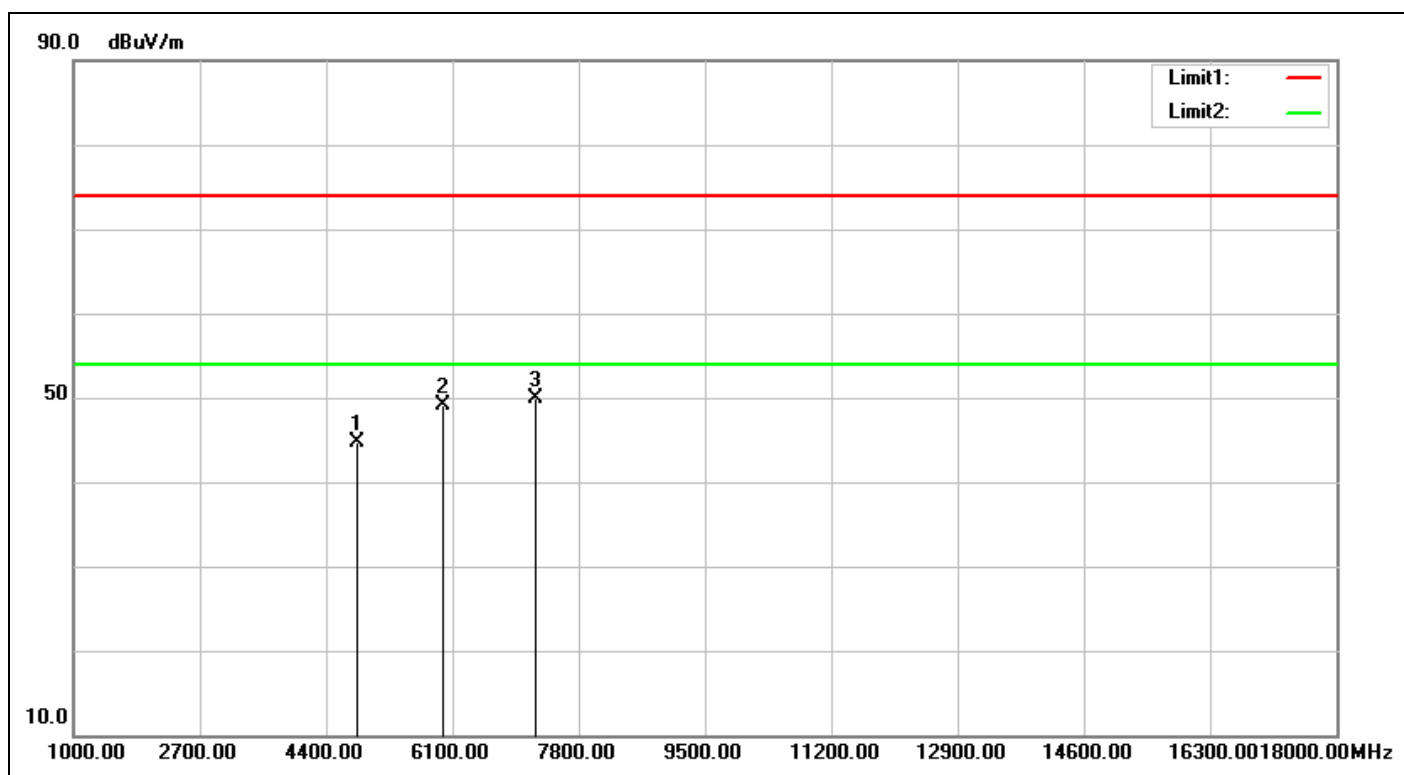


Service No.:	114056074(FERRARI NIT)-NCC-WIFI	Test Distance:	3m
Test Standard:	NCC Above 1G PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2018/3/1 19:27:26
Applicant:	Delphi Deutschland GmbH	Test Rating:	DC 12V
Product:	Head Unit	Temp.(°C)/Hum.(%)	20.2(°C)/56%
Model No.:	FERRARI NIT	Test Engineer:	Amy Hsu
Test Mode:	G-2412-TX		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	4824.000	-2.66	47.36	44.70	74.00	-29.30	peak	100	154	
2	5964.000	3.16	45.87	49.03	74.00	-24.97	peak	100	188	
3	7236.000	5.32	44.67	49.99	74.00	-24.01	peak	100	163	

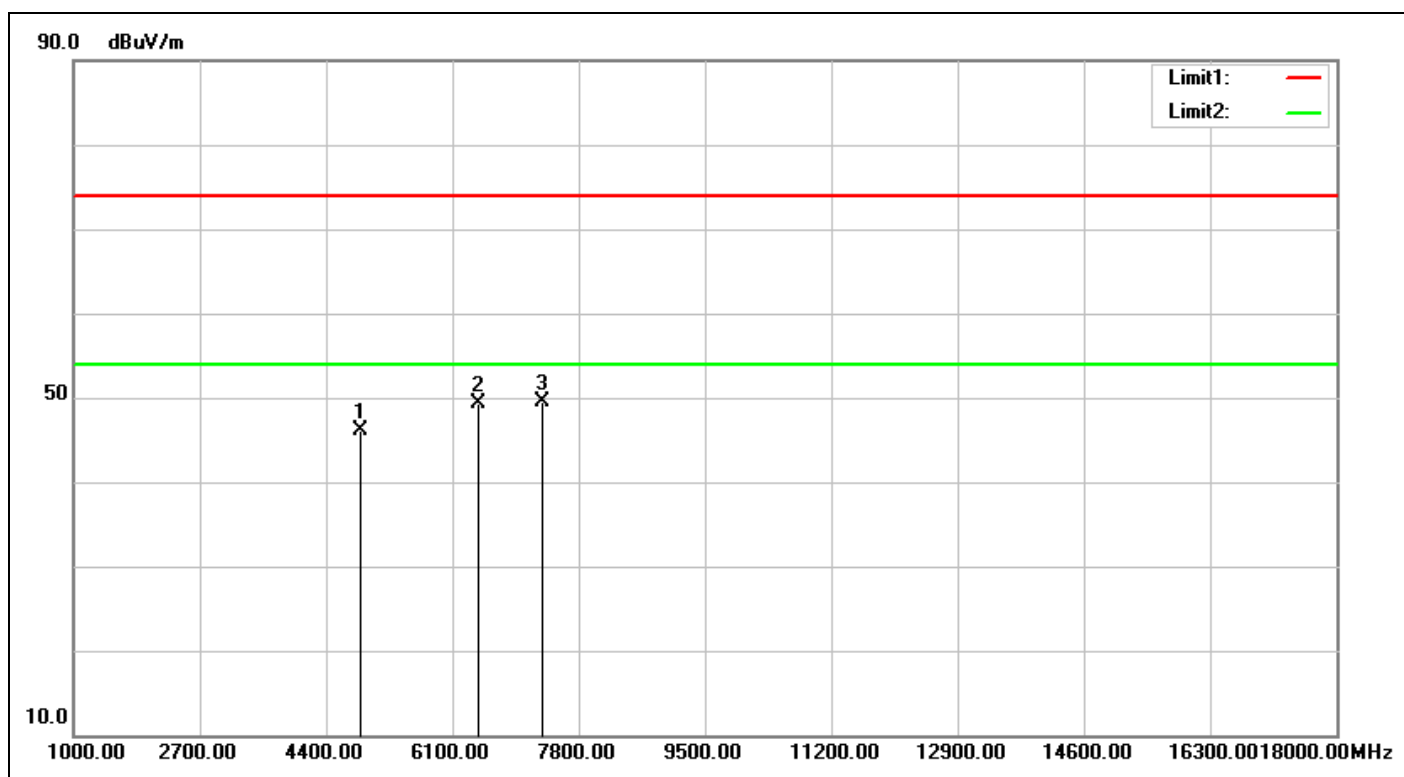


Service No.:	114056074(FERRARI NIT)-NCC-WIFI	Test Distance:	3m
Test Standard:	NCC Above 1G PEAK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2018/3/1 19:32:48
Applicant:	Delphi Deutschland GmbH	Test Rating:	DC 12V
Product:	Head Unit	Temp.(°C)/Hum.(%)	20.2(°C)/56%
Model No.:	FERRARI NIT	Test Engineer:	Amy Hsu
Test Mode:	G-2437-TX		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	4874.000	-2.53	48.68	46.15	74.00	-27.85	peak	100	152	
2	6457.000	5.21	44.18	49.39	74.00	-24.61	peak	100	213	
3	7311.000	5.52	44.07	49.59	74.00	-24.41	peak	100	106	

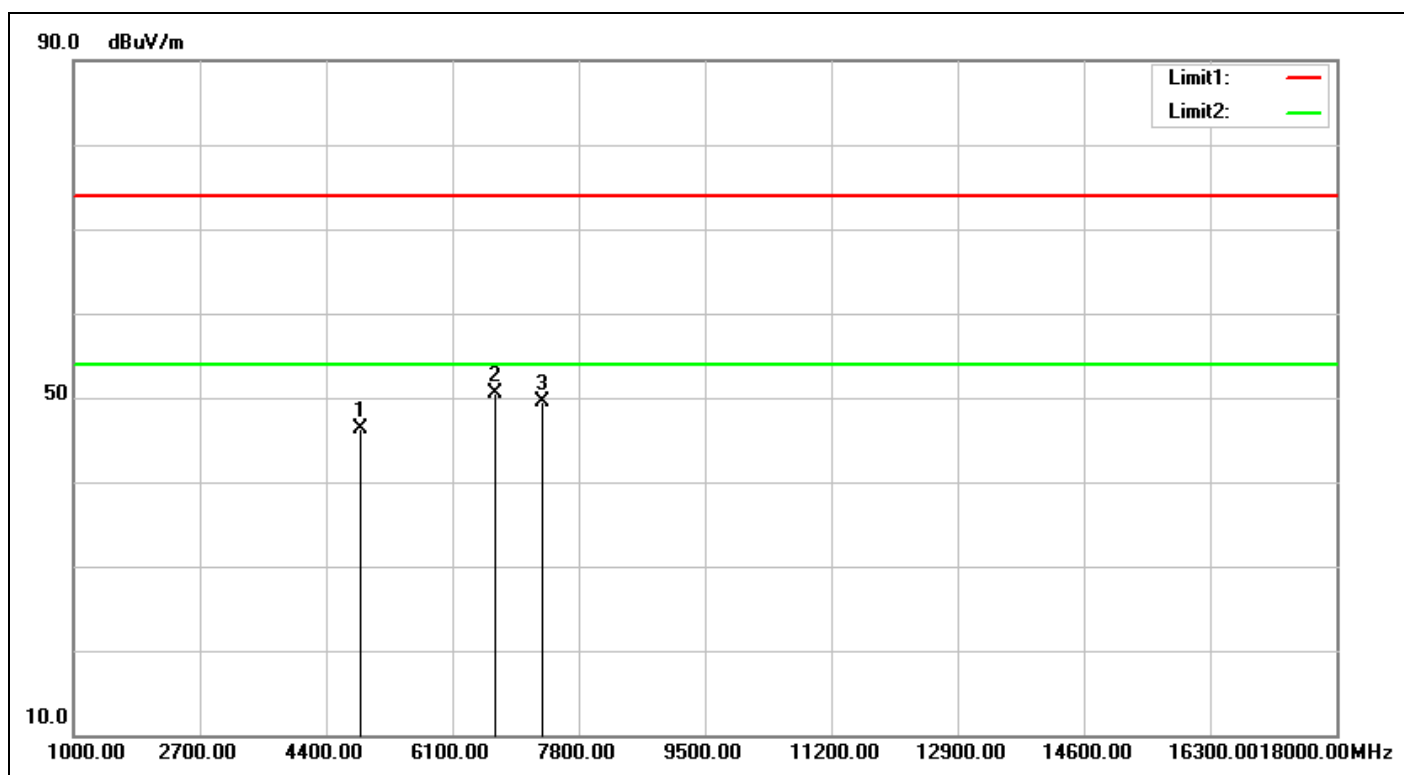


Service No.:	114056074(FERRARI NIT)-NCC-WIFI	Test Distance:	3m
Test Standard:	NCC Above 1G PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2018/3/1 19:33:51
Applicant:	Delphi Deutschland GmbH	Test Rating:	DC 12V
Product:	Head Unit	Temp.(°C)/Hum.(%)	20.2(°C)/56%
Model No.:	FERRARI NIT	Test Engineer:	Amy Hsu
Test Mode:	G-2437-TX		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	4874.000	-2.53	48.90	46.37	74.00	-27.63	peak	100	175	
2	6678.000	5.14	45.30	50.44	74.00	-23.56	peak	100	252	
3	7311.000	5.52	43.92	49.44	74.00	-24.56	peak	100	162	

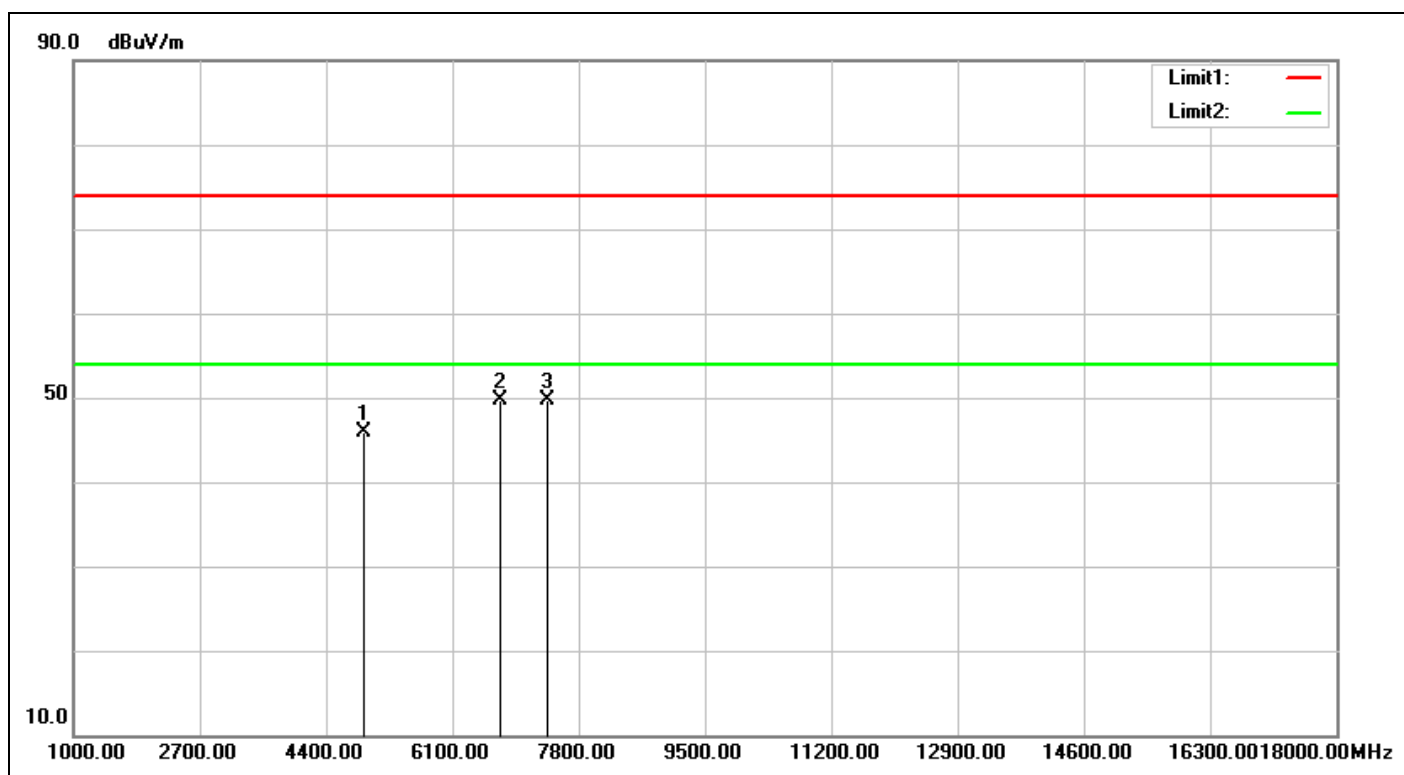


Service No.:	114056074(FERRARI NIT)-NCC-WIFI	Test Distance:	3m
Test Standard:	NCC Above 1G PEAK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2018/3/1 19:36:55
Applicant:	Delphi Deutschland GmbH	Test Rating:	DC 12V
Product:	Head Unit	Temp.(°C)/Hum.(%)	20.2(°C)/56%
Model No.:	FERRARI NIT	Test Engineer:	Amy Hsu
Test Mode:	G-2462-TX		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	4924.000	-2.39	48.26	45.87	74.00	-28.13	peak	100	168	
2	6746.000	5.05	44.69	49.74	74.00	-24.26	peak	100	259	
3	7386.000	5.70	43.94	49.64	74.00	-24.36	peak	100	210	

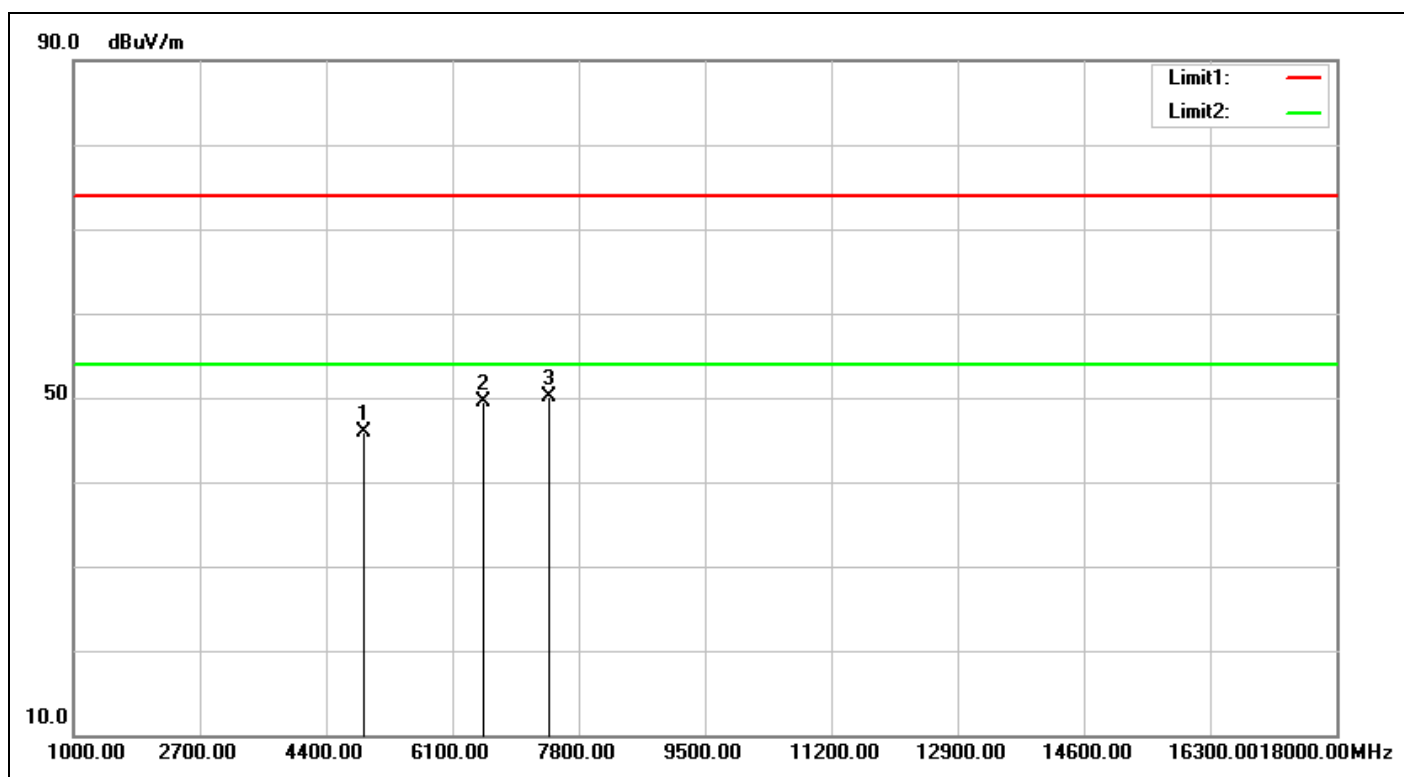


Service No.:	114056074(FERRARI NIT)-NCC-WIFI	Test Distance:	3m
Test Standard:	NCC Above 1G PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2018/3/1 19:37:59
Applicant:	Delphi Deutschland GmbH	Test Rating:	DC 12V
Product:	Head Unit	Temp.(°C)/Hum.(%)	20.2(°C)/56%
Model No.:	FERRARI NIT	Test Engineer:	Amy Hsu
Test Mode:	G-2462-TX		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	4924.000	-2.39	48.20	45.81	74.00	-28.19	peak	100	276	
2	6525.000	5.33	44.12	49.45	74.00	-24.55	peak	100	148	
3	7386.000	5.70	44.47	50.17	74.00	-23.83	peak	100	132	

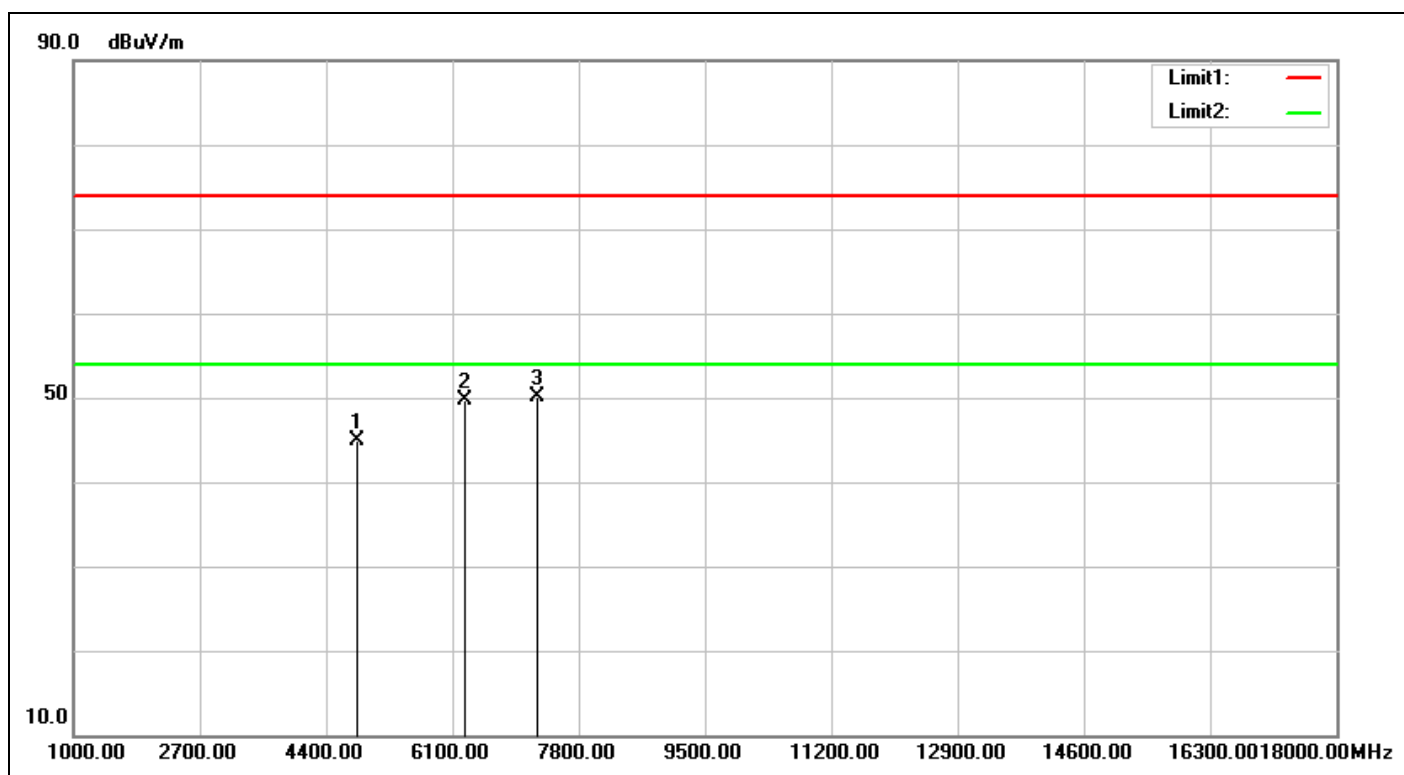


Service No.:	114056074(FERRARI NIT)-NCC-WIFI	Test Distance:	3m
Test Standard:	NCC Above 1G PEAK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2018/3/1 19:41:51
Applicant:	Delphi Deutschland GmbH	Test Rating:	DC 12V
Product:	Head Unit	Temp.(°C)/Hum.(%)	20.2(°C)/56%
Model No.:	FERRARI NIT	Test Engineer:	Amy Hsu
Test Mode:	N20-2412-TX		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	4824.000	-2.66	47.61	44.95	74.00	-29.05	peak	100	134	
2	6270.000	4.47	45.24	49.71	74.00	-24.29	peak	100	203	
3	7236.000	5.32	44.75	50.07	74.00	-23.93	peak	100	145	

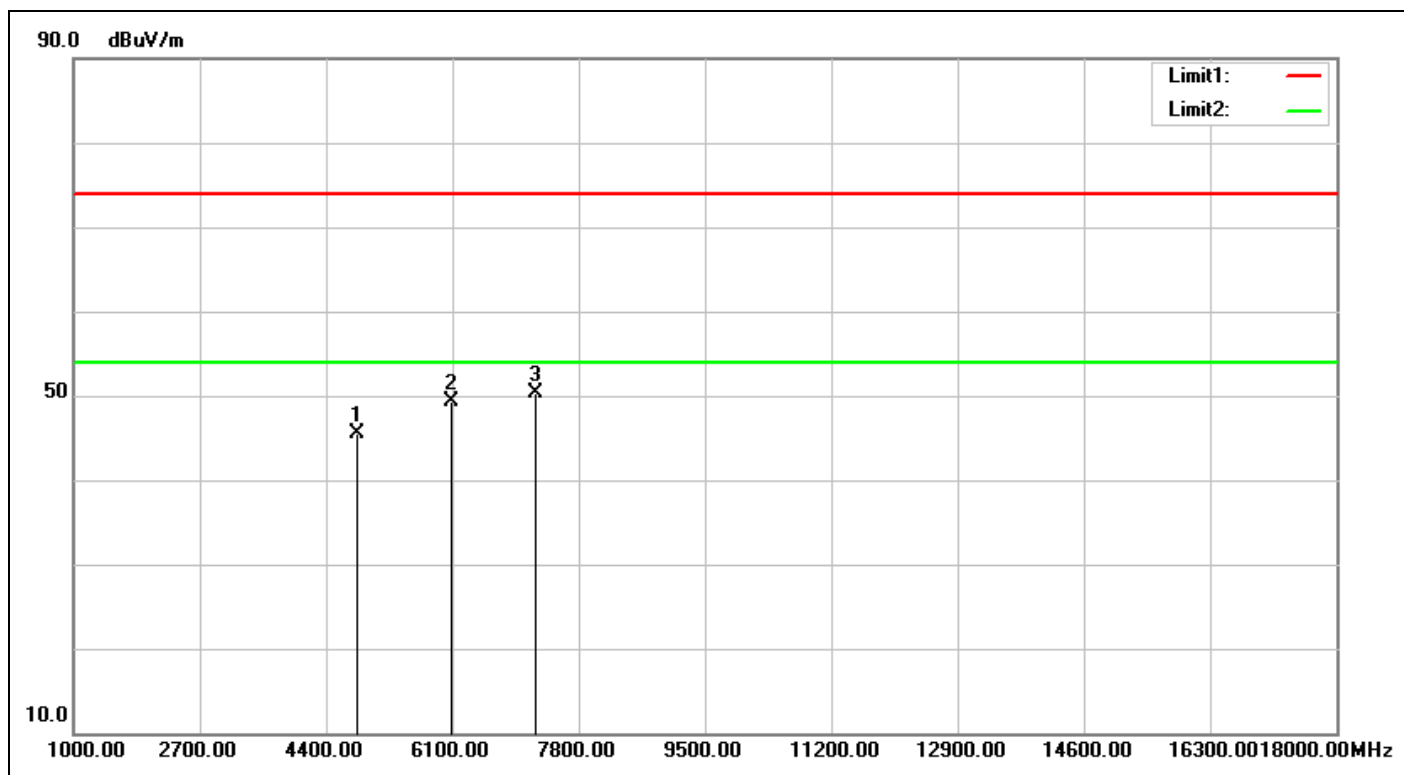


Service No.:	114056074(FERRARI NIT)-NCC-WIFI	Test Distance:	3m
Test Standard:	NCC Above 1G PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2018/3/1 19:42:53
Applicant:	Delphi Deutschland GmbH	Test Rating:	DC 12V
Product:	Head Unit	Temp.(°C)/Hum.(%)	20.2(°C)/56%
Model No.:	FERRARI NIT	Test Engineer:	Amy Hsu
Test Mode:	N20-2412-TX		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	4824.000	-2.66	48.11	45.45	74.00	-28.55	peak	100	129	
2	6083.000	3.72	45.59	49.31	74.00	-24.69	peak	100	282	
3	7236.000	5.32	44.98	50.30	74.00	-23.70	peak	100	208	

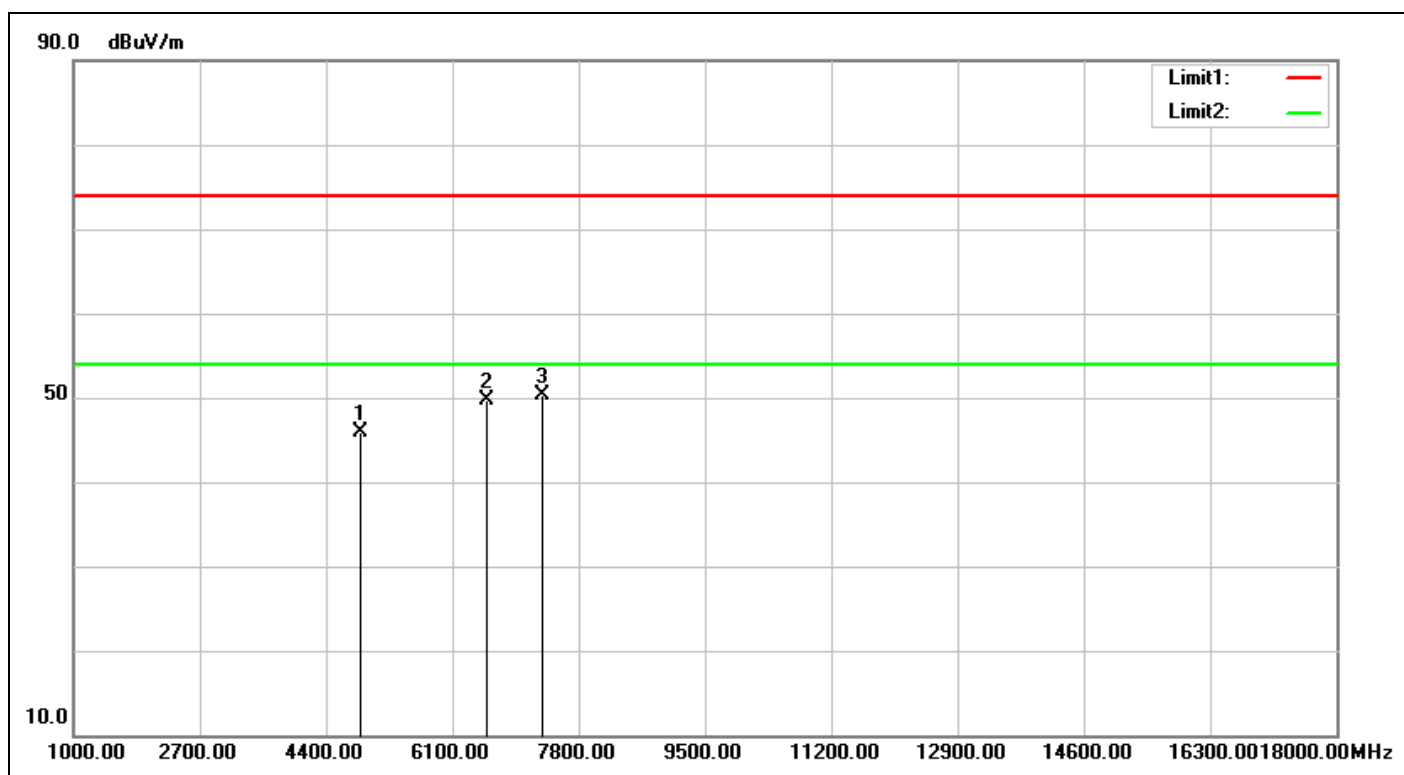


Service No.:	114056074(FERRARI NIT)-NCC-WIFI	Test Distance:	3m
Test Standard:	NCC Above 1G PEAK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2018/3/1 19:45:10
Applicant:	Delphi Deutschland GmbH	Test Rating:	DC 12V
Product:	Head Unit	Temp.(°C)/Hum.(%)	20.2(°C)/56%
Model No.:	FERRARI NIT	Test Engineer:	Amy Hsu
Test Mode:	N20-2437-TX		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	4874.000	-2.53	48.52	45.99	74.00	-28.01	peak	100	154	
2	6559.000	5.29	44.51	49.80	74.00	-24.20	peak	100	209	
3	7311.000	5.52	44.75	50.27	74.00	-23.73	peak	100	136	

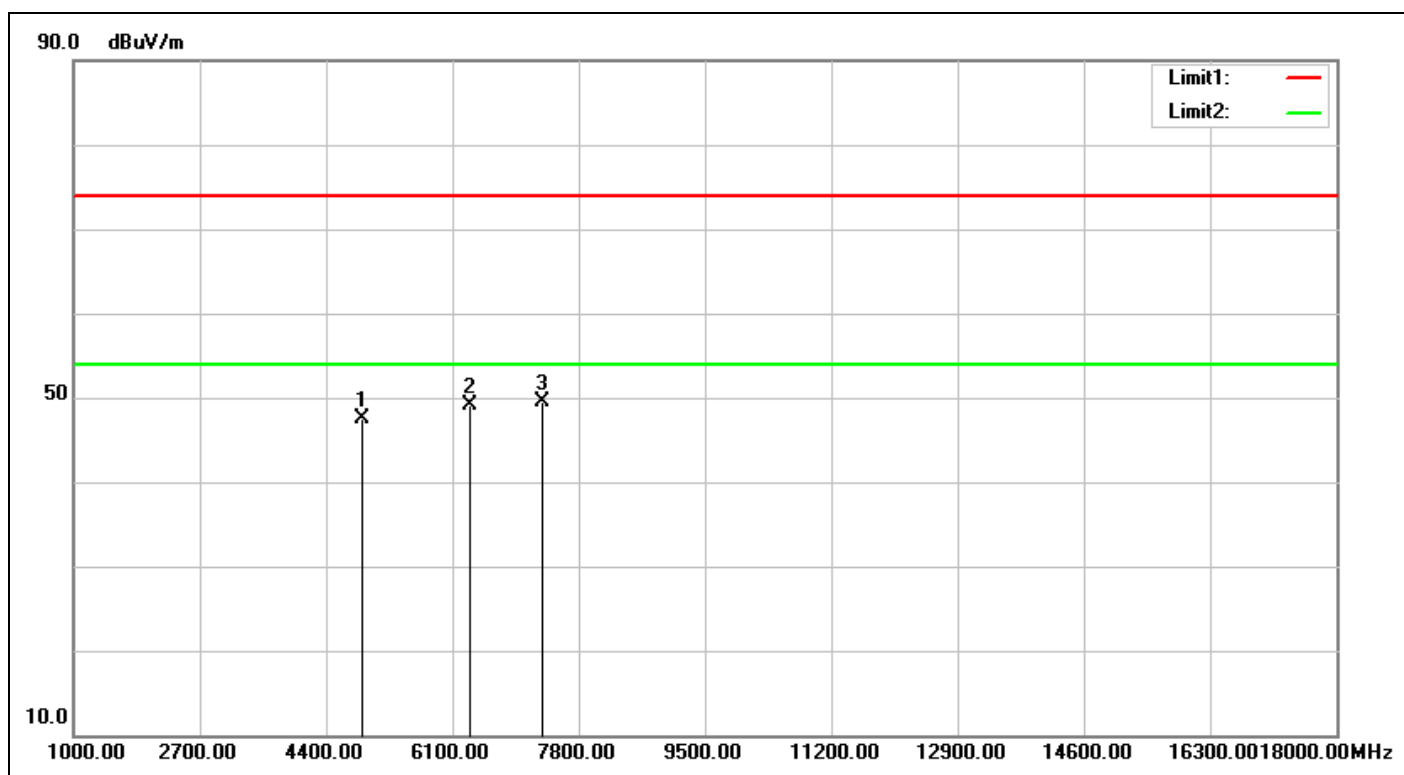


Service No.:	114056074(FERRARI NIT)-NCC-WIFI	Test Distance:	3m
Test Standard:	NCC Above 1G PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2018/3/1 19:46:13
Applicant:	Delphi Deutschland GmbH	Test Rating:	DC 12V
Product:	Head Unit	Temp.(°C)/Hum.(%)	20.2(°C)/56%
Model No.:	FERRARI NIT	Test Engineer:	Amy Hsu
Test Mode:	N20-2437-TX		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	4874.000	-2.53	50.00	47.47	74.00	-26.53	peak	100	168	
2	6338.000	4.73	44.44	49.17	74.00	-24.83	peak	100	193	
3	7311.000	5.52	43.96	49.48	74.00	-24.52	peak	100	234	

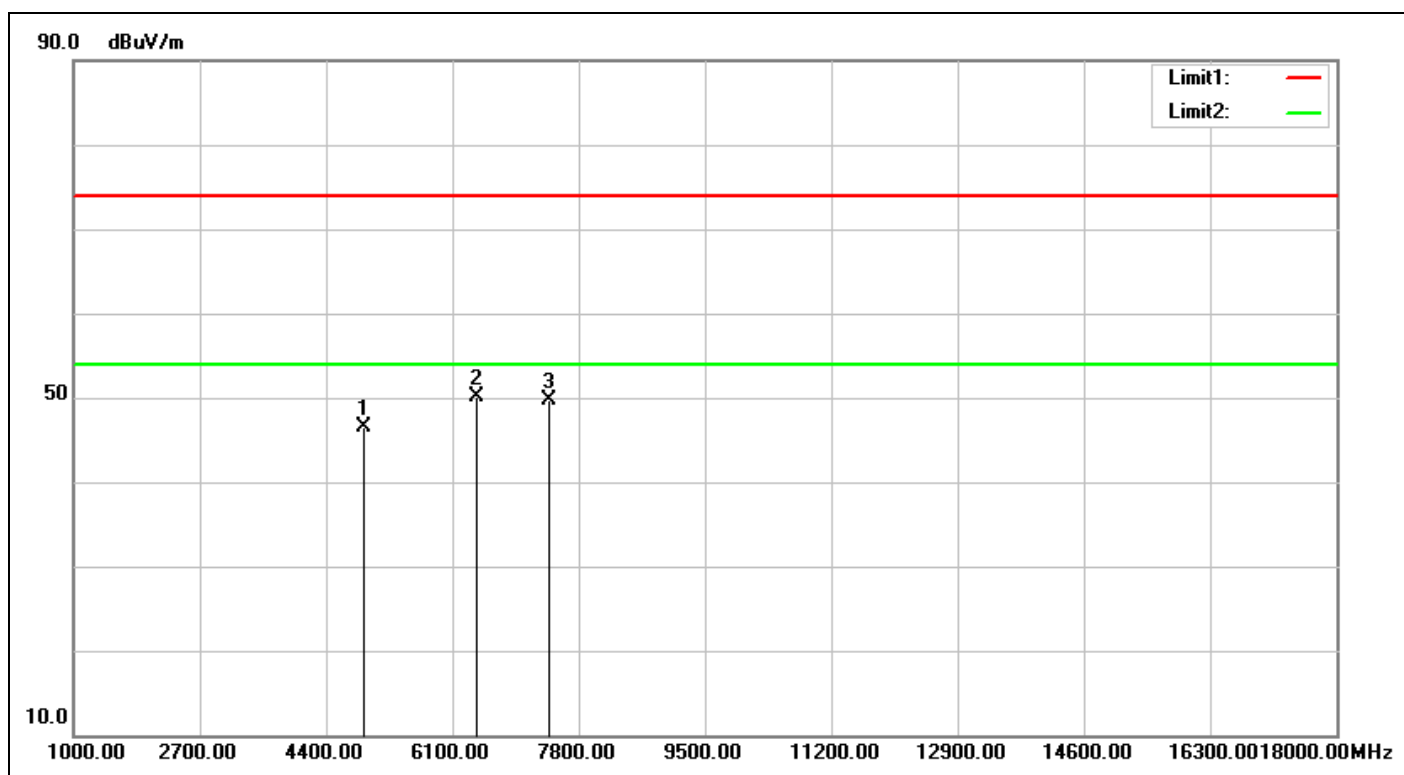

Service No.:	114056074(FERRARI NIT)-NCC-WIFI	Test Distance:	3m
Test Standard:	NCC Above 1G PEAK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2018/3/1 19:49:21
Applicant:	Delphi Deutschland GmbH	Test Rating:	DC 12V
Product:	Head Unit	Temp.(°C)/Hum.(%)	20.2(°C)/56%
Model No.:	FERRARI NIT	Test Engineer:	Amy Hsu
Test Mode:	N20-2462-TX		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	4924.000	-2.39	48.91	46.52	74.00	-27.48	peak	100	127	
2	6423.000	5.07	44.98	50.05	74.00	-23.95	peak	100	301	
3	7386.000	5.70	43.92	49.62	74.00	-24.38	peak	100	226	

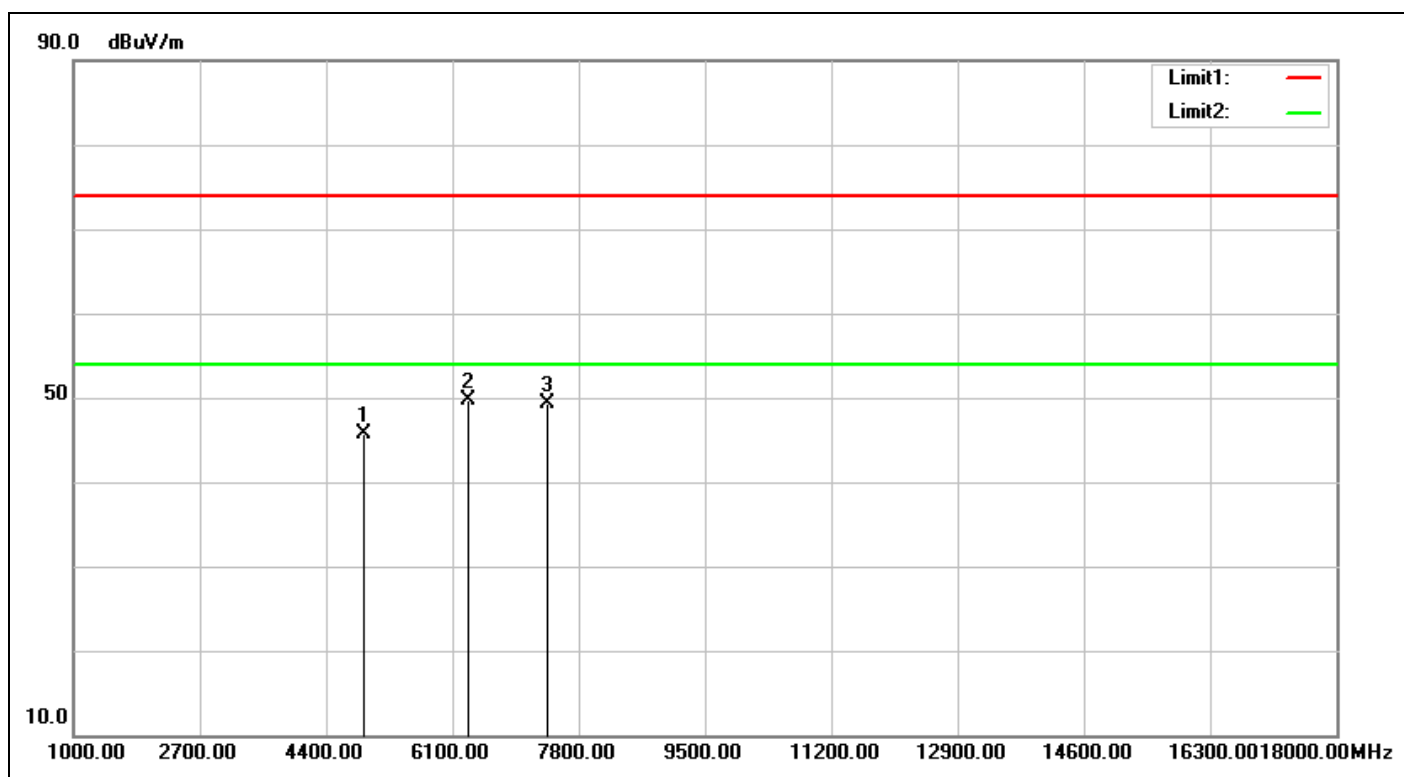

Service No.:	114056074(FERRARI NIT)-NCC-WIFI	Test Distance:	3m
Test Standard:	NCC Above 1G PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2018/3/1 19:50:25
Applicant:	Delphi Deutschland GmbH	Test Rating:	DC 12V
Product:	Head Unit	Temp.(°C)/Hum.(%)	20.2(°C)/56%
Model No.:	FERRARI NIT	Test Engineer:	Amy Hsu
Test Mode:	N20-2462-TX		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	4924.000	-2.39	48.05	45.66	74.00	-28.34	peak	100	166	
2	6321.000	4.66	44.97	49.63	74.00	-24.37	peak	100	119	
3	7386.000	5.70	43.61	49.31	74.00	-24.69	peak	100	128	


Spurious Emissions, TX Mode, 18-26G



TUV Rheinland Taiwan Ltd.

11F., No.758, Sec.4 Bade Road. Songshan Dist, Taipei City 105


Tel:+886-2172-7000 fax:+886-2528-0018

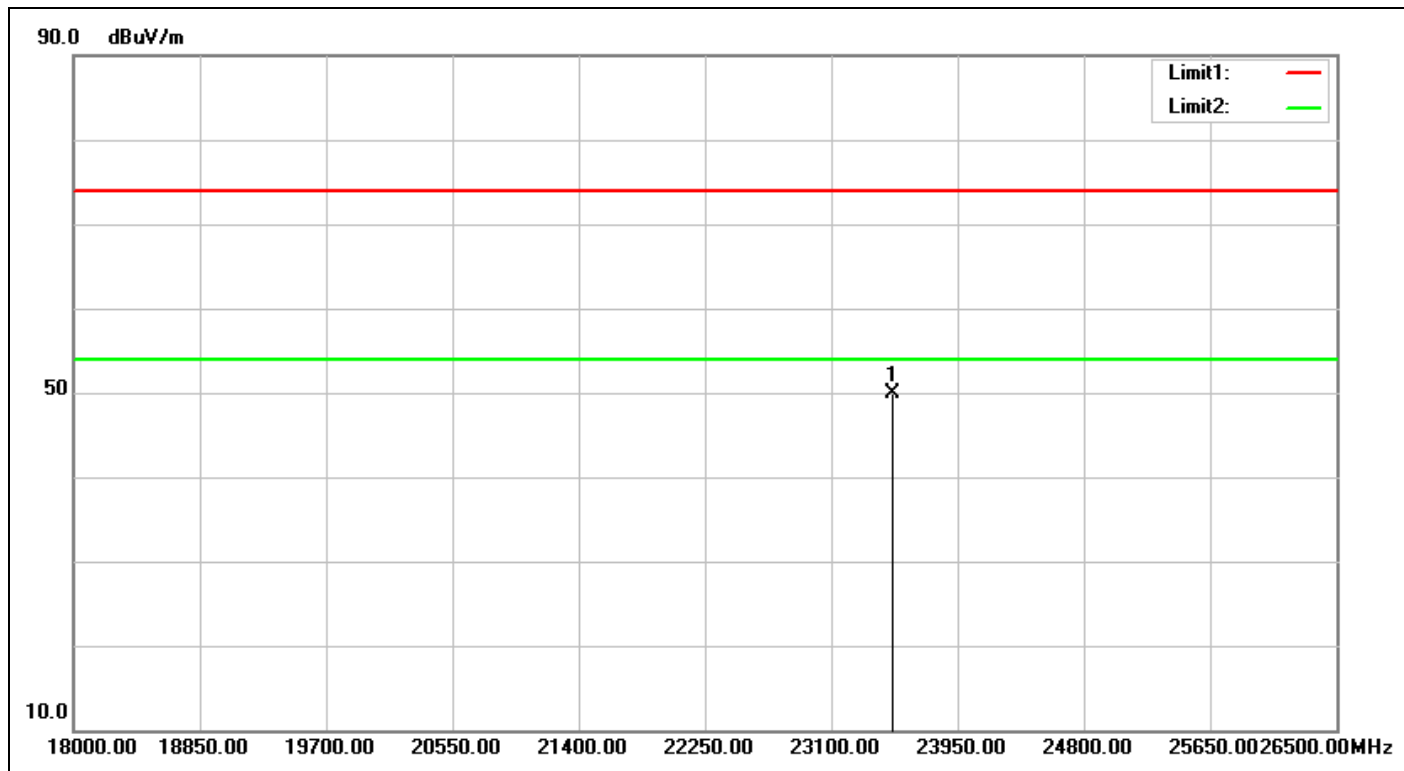

Service No.:	114056074(FERRARI NIT)-NCC-WIFI	Test Distance:	3m
Test Standard:	NCC Above 1G PEAK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2018/3/1 20:25:38
Applicant:	Delphi Deutschland GmbH	Test Rating:	DC 12V
Product:	Head Unit	Temp.(°C)/Hum.(%)	20.2(°C)/56%
Model No.:	FERRARI NIT	Test Engineer:	Amy Hsu
Test Mode:	B-2412-TX		
Remark:			


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	23508.000	33.26	16.73	49.99	74.00	-24.01	peak	100	106	

Spurious Emissions, TX Mode, 9k-30M

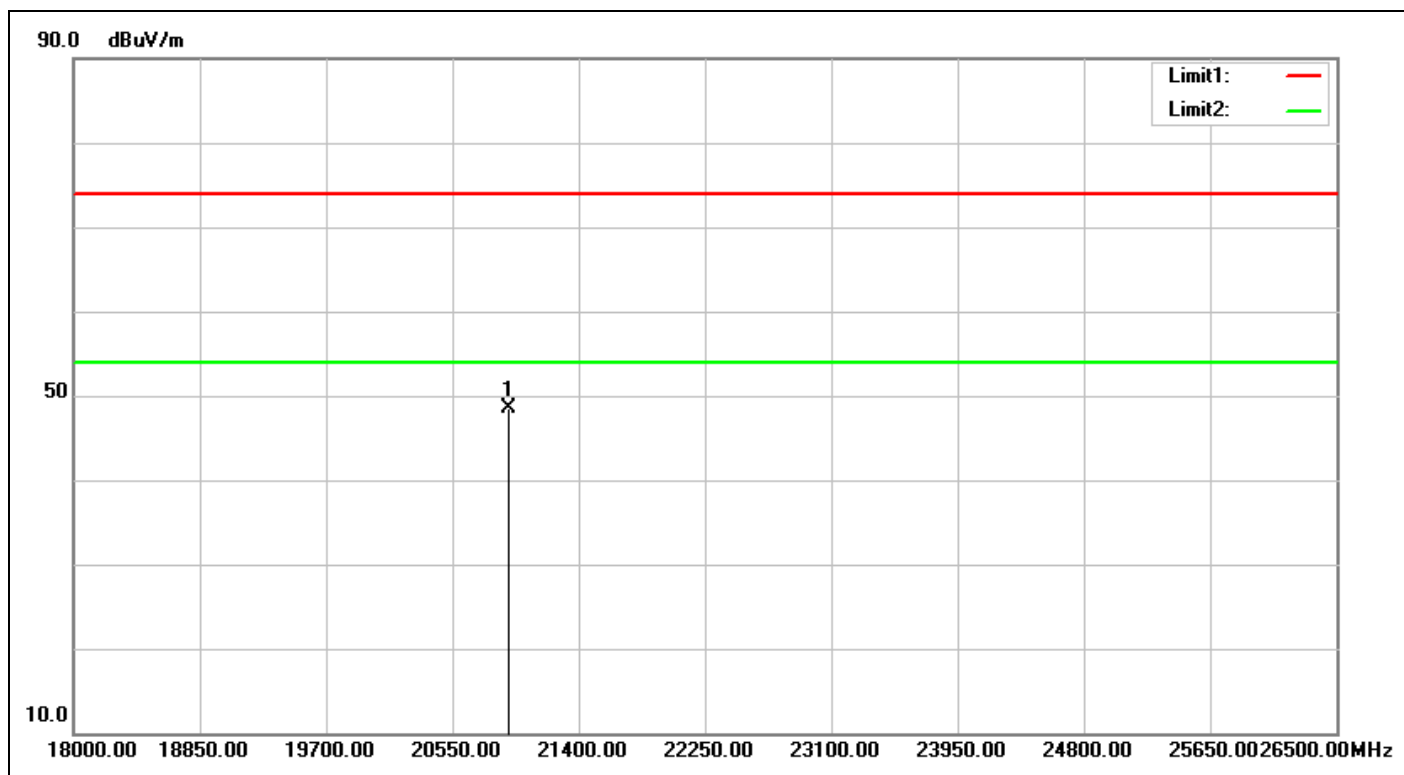


Service No.:	114056074(FERRARI NIT)-NCC-WIFI	Test Distance:	3m
Test Standard:	NCC Above 1G PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2018/3/1 20:25:50
Applicant:	Delphi Deutschland GmbH	Test Rating:	DC 12V
Product:	Head Unit	Temp.(°C)/Hum.(%):	20.2(°C)/56%
Model No.:	FERRARI NIT	Test Engineer:	Amy Hsu
Test Mode:	B-2412-TX		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	20932.500	32.30	16.12	48.42	74.00	-25.58	peak	100	101	

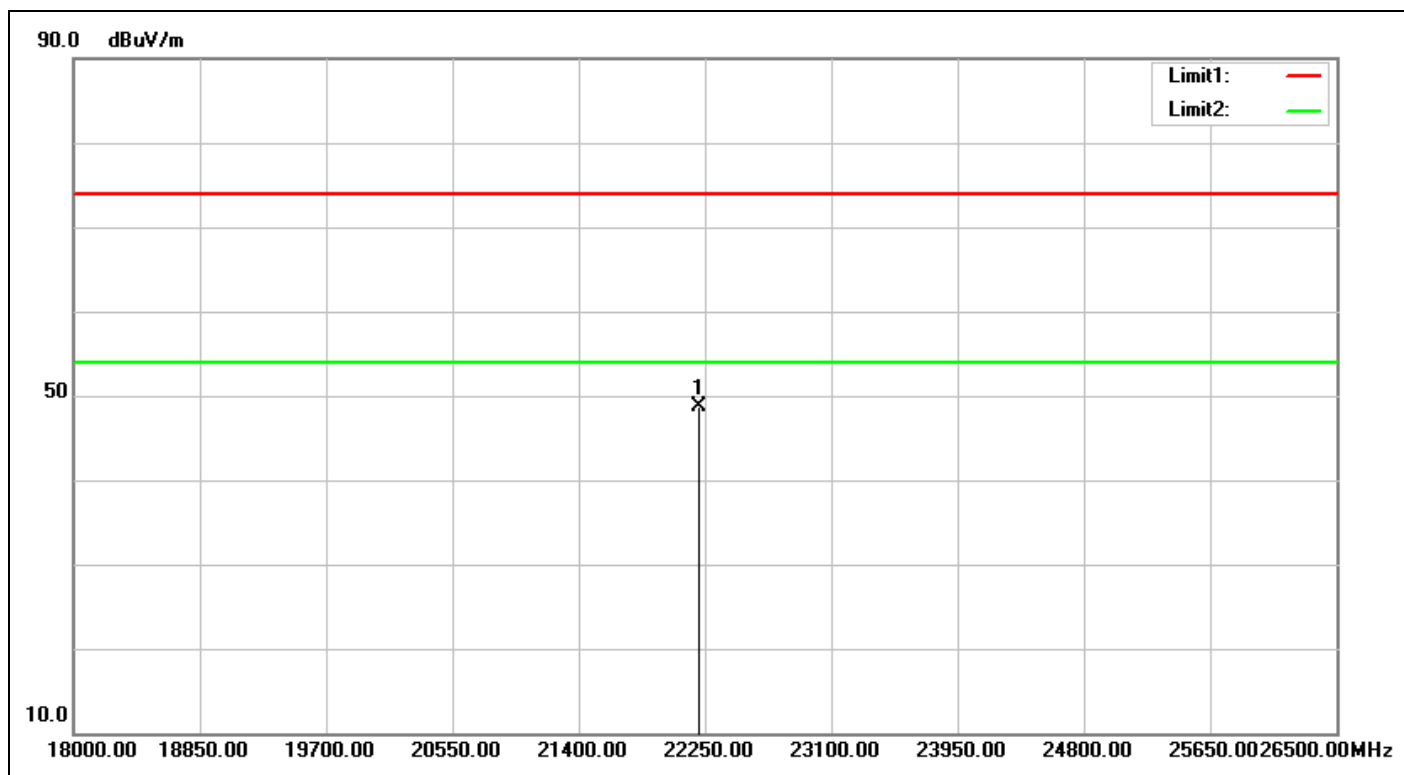


Service No.:	114056074(FERRARI NIT)-NCC-WIFI	Test Distance:	3m
Test Standard:	NCC Above 1G PEAK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2018/3/1 20:26:09
Applicant:	Delphi Deutschland GmbH	Test Rating:	DC 12V
Product:	Head Unit	Temp.(°C)/Hum.(%):	20.2(°C)/56%
Model No.:	FERRARI NIT	Test Engineer:	Amy Hsu
Test Mode:	B-2437-TX		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	22207.500	32.61	16.03	48.64	74.00	-25.36	peak	100	196	

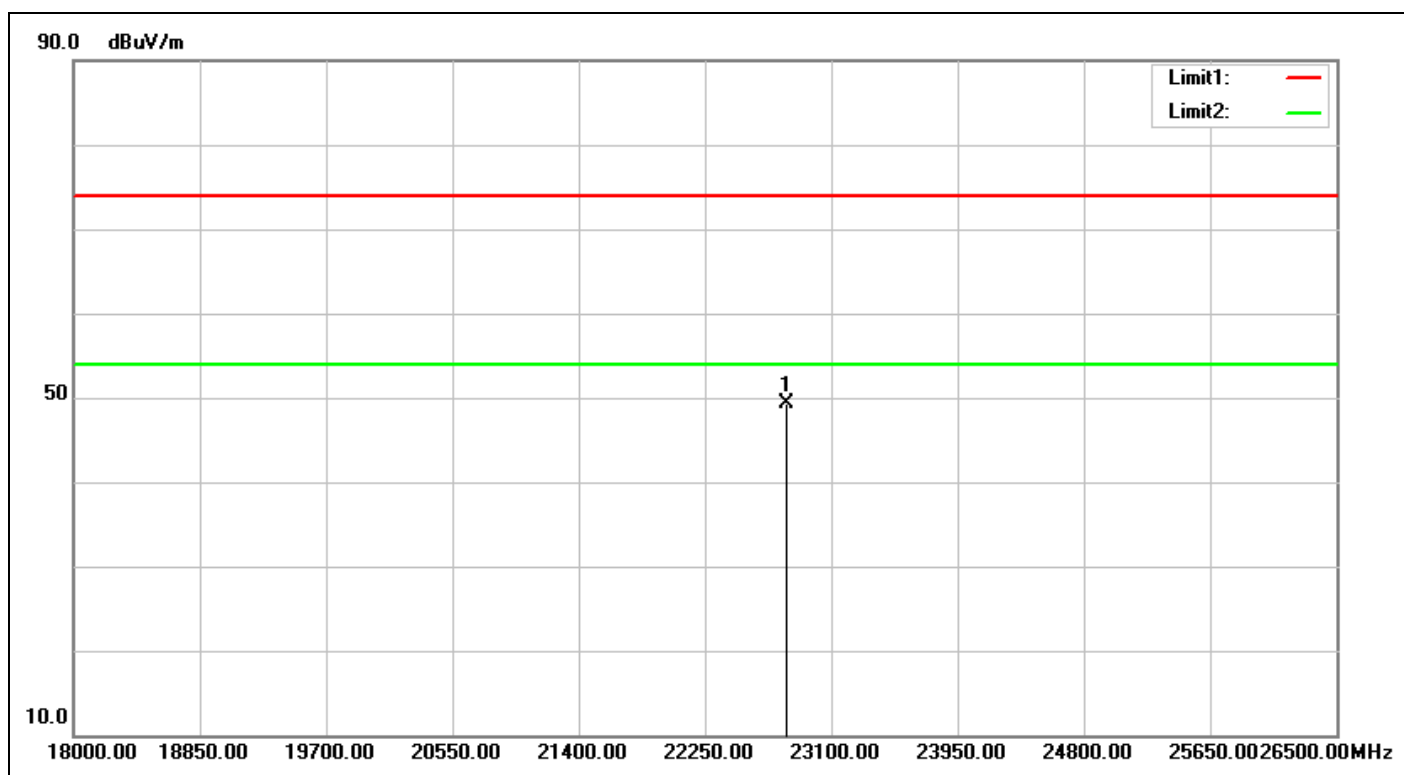


Service No.:	114056074(FERRARI NIT)-NCC-WIFI	Test Distance:	3m
Test Standard:	NCC Above 1G PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2018/3/1 20:26:30
Applicant:	Delphi Deutschland GmbH	Test Rating:	DC 12V
Product:	Head Unit	Temp.(°C)/Hum.(%):	20.2(°C)/56%
Model No.:	FERRARI NIT	Test Engineer:	Amy Hsu
Test Mode:	B-2437-TX		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	22802.500	32.74	16.63	49.37	74.00	-24.63	peak	100	183	

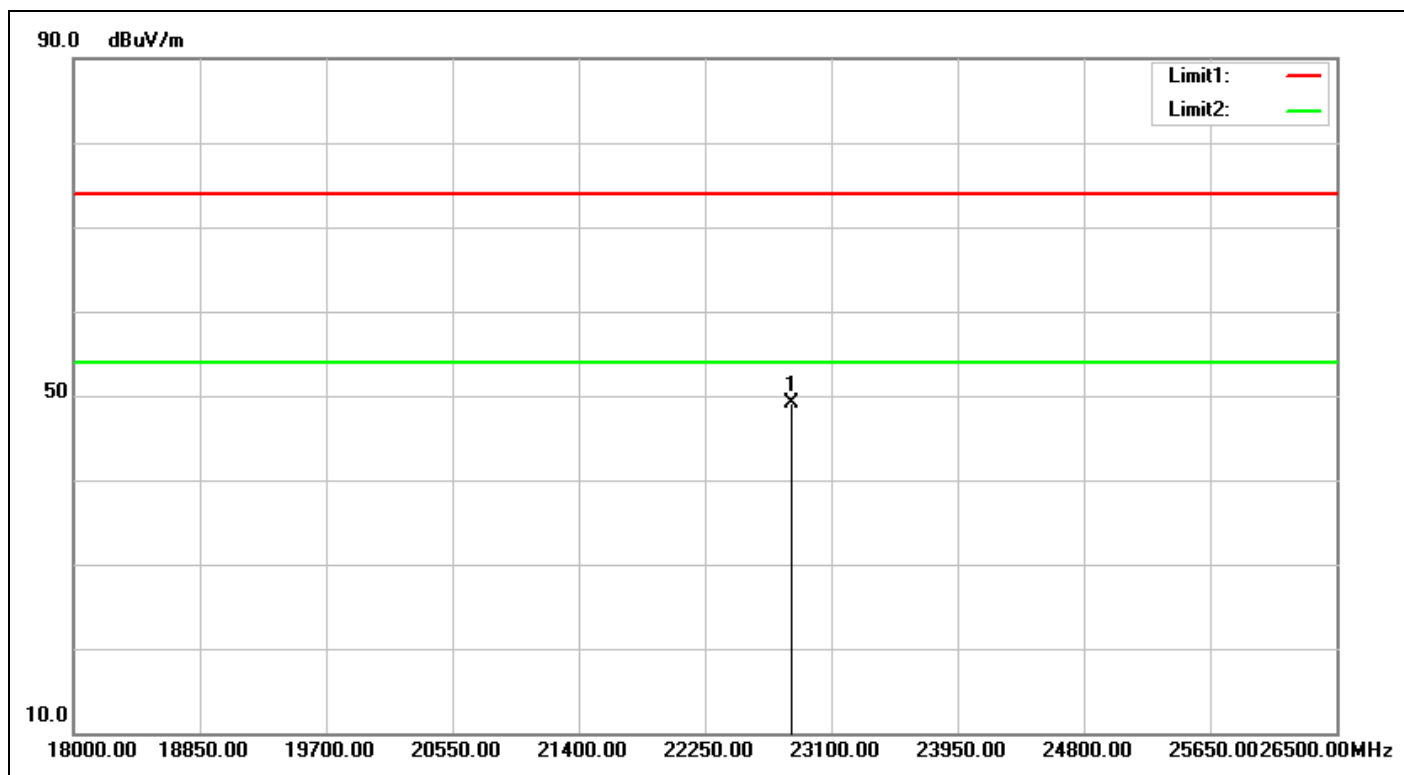


Service No.:	114056074(FERRARI NIT)-NCC-WIFI	Test Distance:	3m
Test Standard:	NCC Above 1G PEAK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2018/3/1 20:26:50
Applicant:	Delphi Deutschland GmbH	Test Rating:	DC 12V
Product:	Head Unit	Temp.(°C)/Hum.(%):	20.2(°C)/56%
Model No.:	FERRARI NIT	Test Engineer:	Amy Hsu
Test Mode:	B-2462-TX		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	22836.500	32.75	16.28	49.03	74.00	-24.97	peak	100	118	

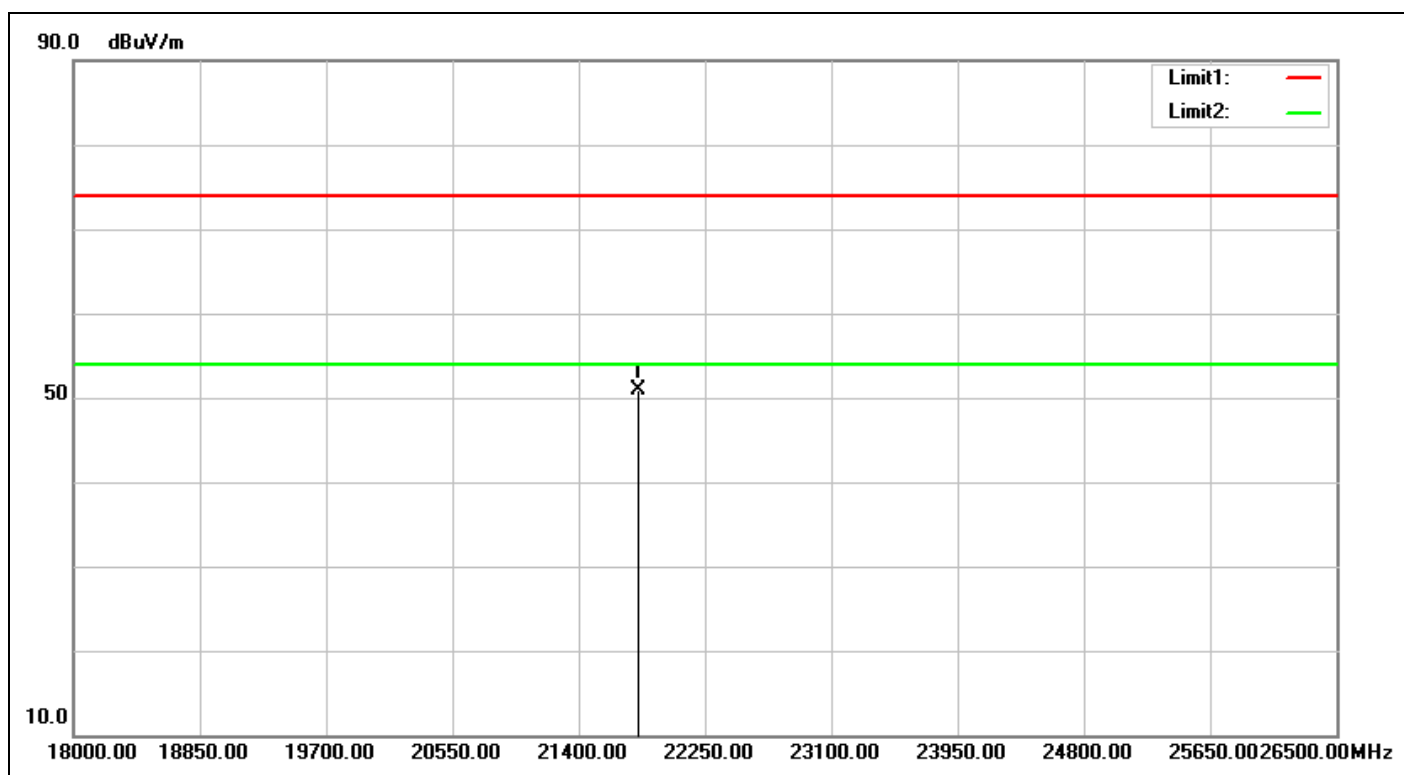


Service No.:	114056074(FERRARI NIT)-NCC-WIFI	Test Distance:	3m
Test Standard:	NCC Above 1G PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2018/3/1 20:27:01
Applicant:	Delphi Deutschland GmbH	Test Rating:	DC 12V
Product:	Head Unit	Temp.(°C)/Hum.(%):	20.2(°C)/56%
Model No.:	FERRARI NIT	Test Engineer:	Amy Hsu
Test Mode:	B-2462-TX		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	21799.500	32.71	18.11	50.82	74.00	-23.18	peak	100	249	

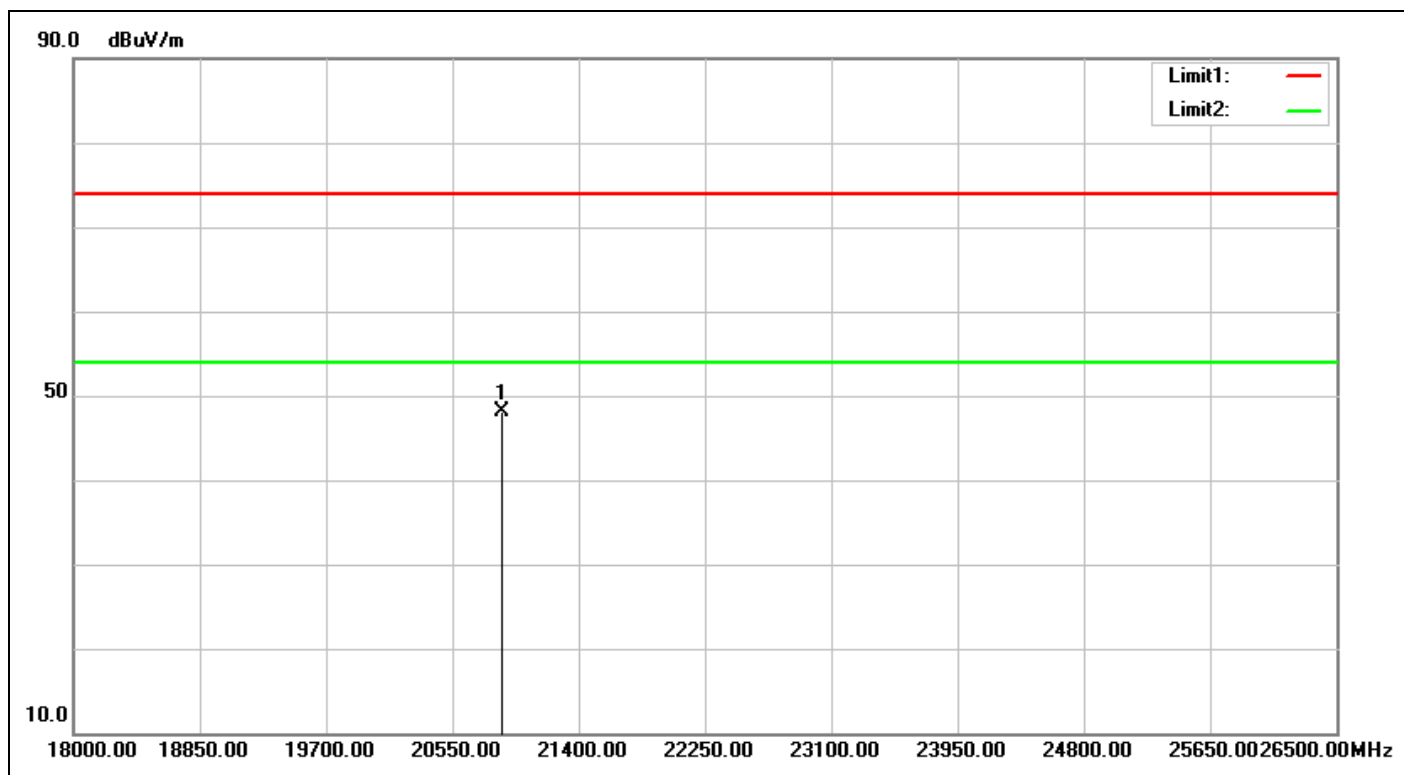


Service No.:	114056074(FERRARI NIT)-NCC-WIFI	Test Distance:	3m
Test Standard:	NCC Above 1G PEAK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2018/3/1 20:27:24
Applicant:	Delphi Deutschland GmbH	Test Rating:	DC 12V
Product:	Head Unit	Temp.(°C)/Hum.(%):	20.2(°C)/56%
Model No.:	FERRARI NIT	Test Engineer:	Amy Hsu
Test Mode:	G-2412-TX		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	20881.500	32.19	15.95	48.14	74.00	-25.86	peak	100	346	

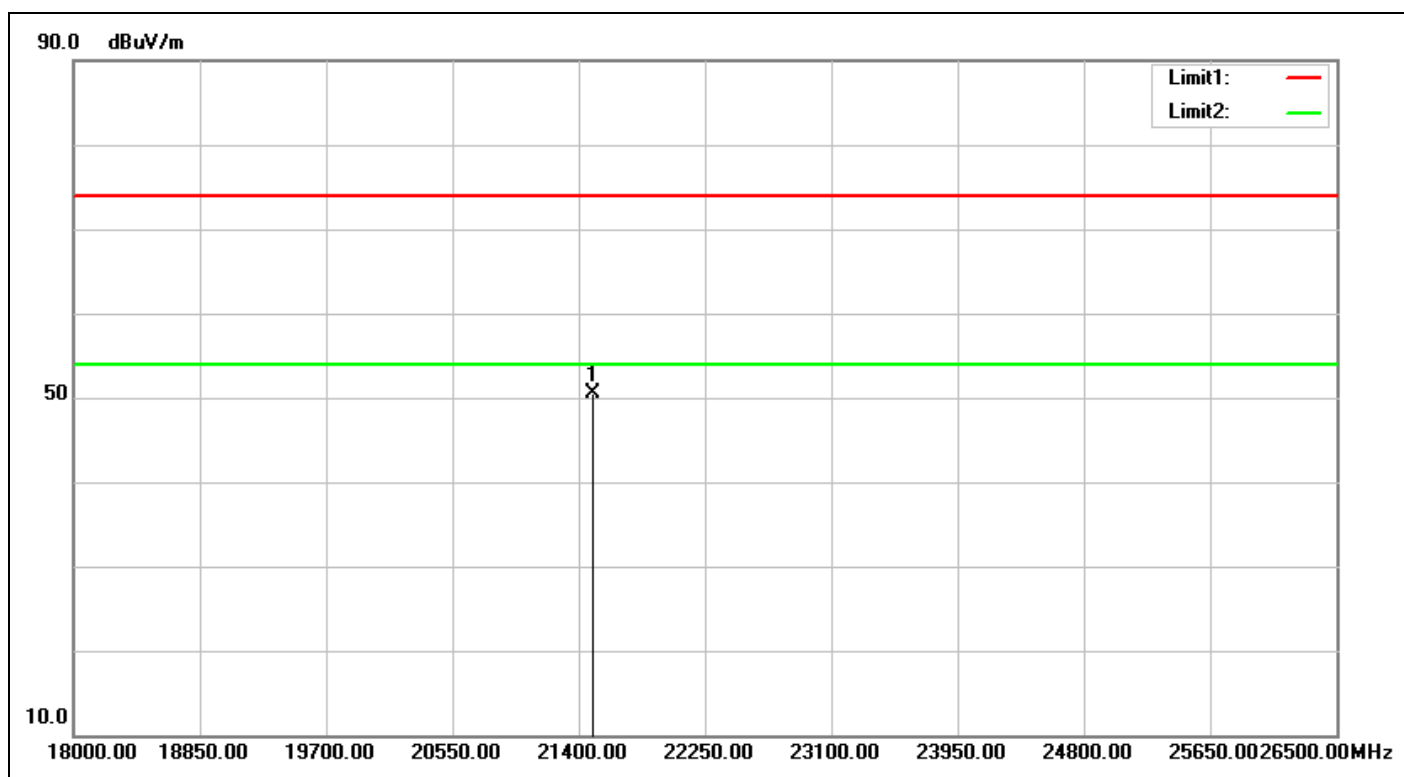


Service No.:	114056074(FERRARI NIT)-NCC-WIFI	Test Distance:	3m
Test Standard:	NCC Above 1G PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2018/3/1 20:27:35
Applicant:	Delphi Deutschland GmbH	Test Rating:	DC 12V
Product:	Head Unit	Temp.(°C)/Hum.(%):	20.2(°C)/56%
Model No.:	FERRARI NIT	Test Engineer:	Amy Hsu
Test Mode:	G-2412-TX		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	21493.500	32.89	17.56	50.45	74.00	-23.55	peak	100	132	

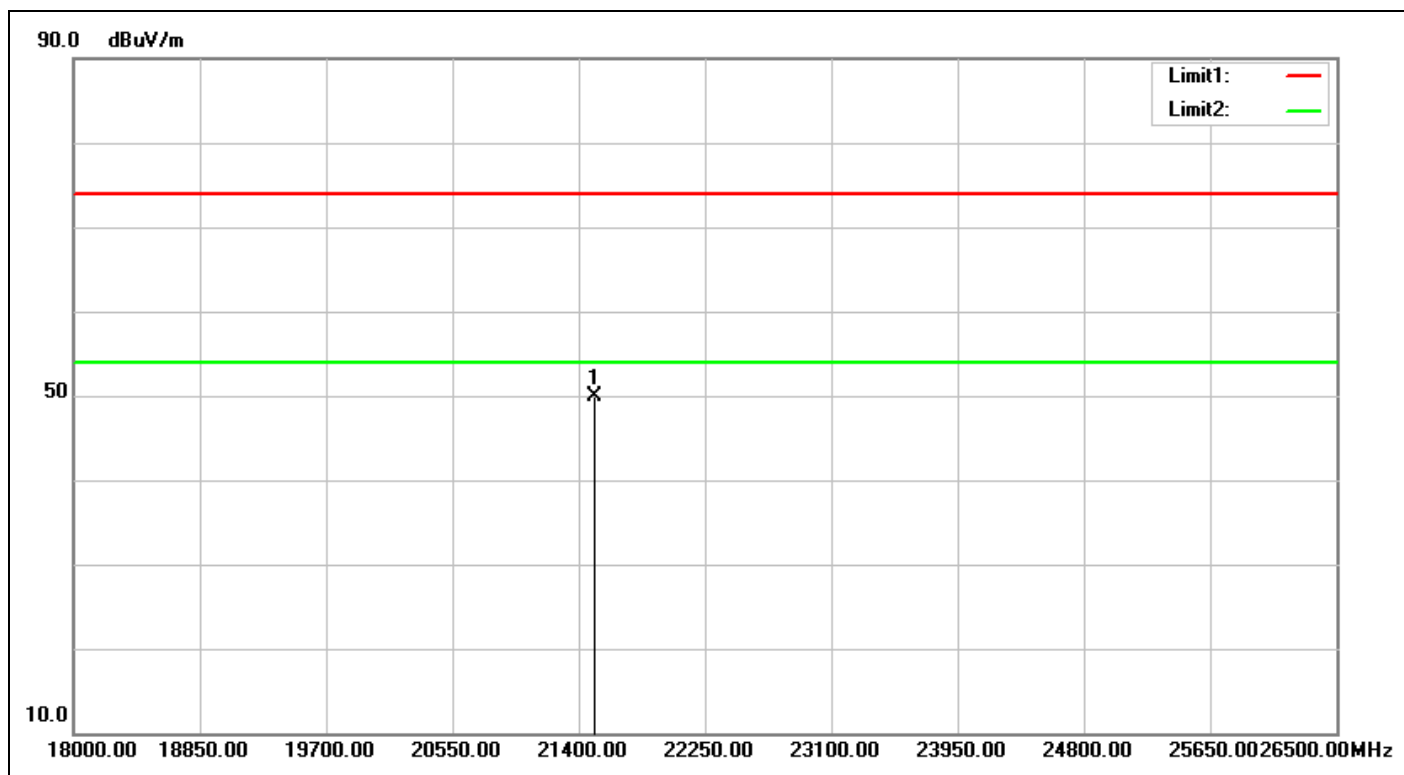


Service No.:	114056074(FERRARI NIT)-NCC-WIFI	Test Distance:	3m
Test Standard:	NCC Above 1G PEAK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2018/3/1 20:27:55
Applicant:	Delphi Deutschland GmbH	Test Rating:	DC 12V
Product:	Head Unit	Temp.(°C)/Hum.(%)	20.2(°C)/56%
Model No.:	FERRARI NIT	Test Engineer:	Amy Hsu
Test Mode:	G-2437-TX		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	21510.500	32.89	17.05	49.94	74.00	-24.06	peak	100	185	

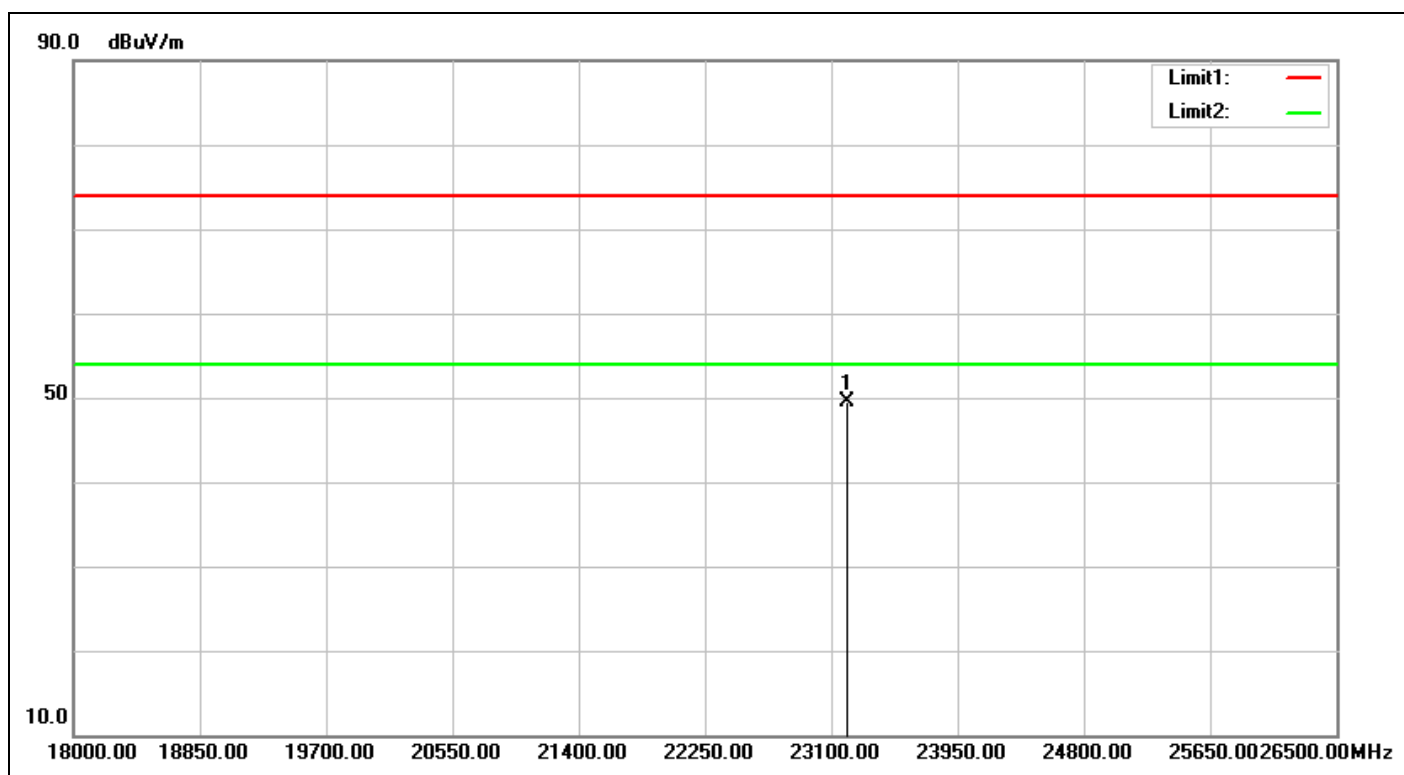


Service No.:	114056074(FERRARI NIT)-NCC-WIFI	Test Distance:	3m
Test Standard:	NCC Above 1G PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2018/3/1 20:28:07
Applicant:	Delphi Deutschland GmbH	Test Rating:	DC 12V
Product:	Head Unit	Temp.(°C)/Hum.(%)	20.2(°C)/56%
Model No.:	FERRARI NIT	Test Engineer:	Amy Hsu
Test Mode:	G-2437-TX		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	23210.500	33.00	16.60	49.60	74.00	-24.40	peak	100	41	

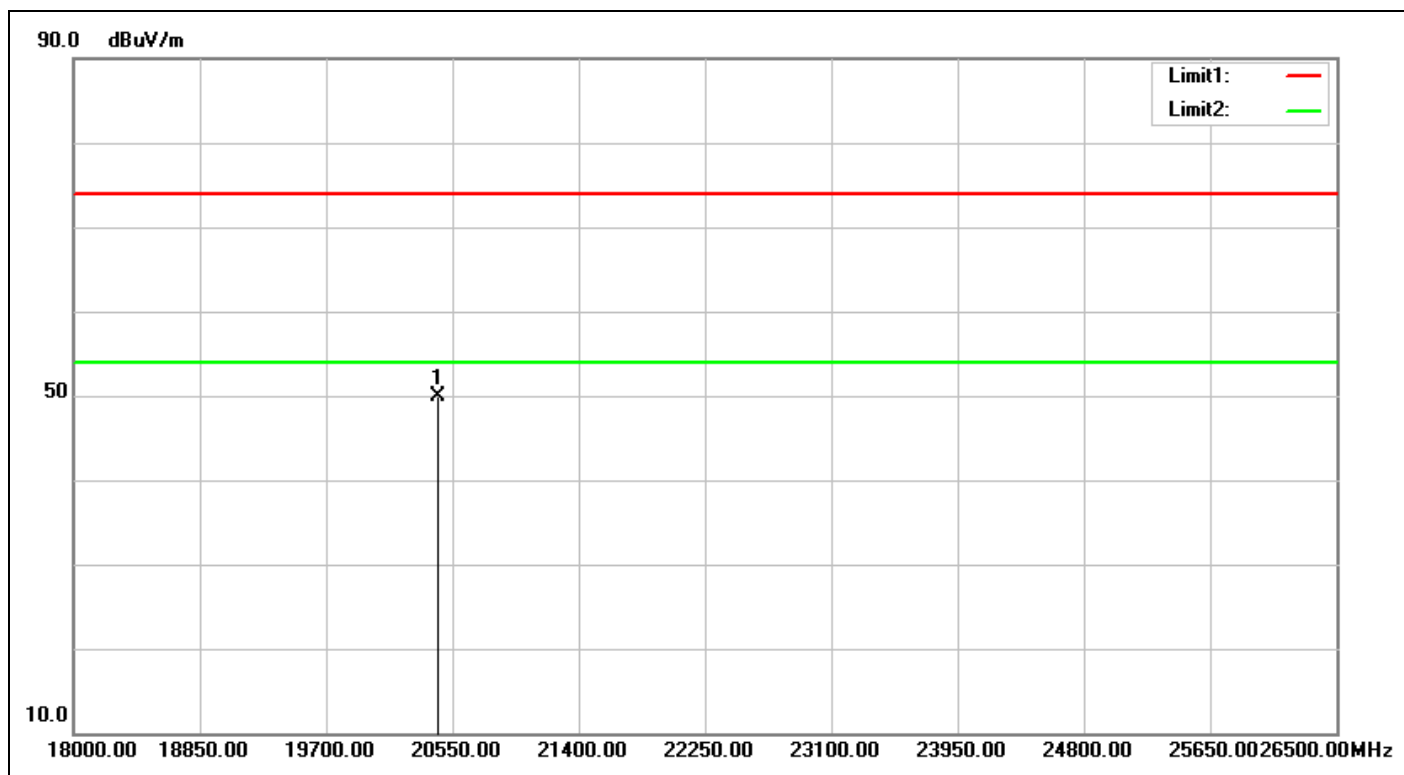


Service No.:	114056074(FERRARI NIT)-NCC-WIFI	Test Distance:	3m
Test Standard:	NCC Above 1G PEAK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2018/3/1 20:28:26
Applicant:	Delphi Deutschland GmbH	Test Rating:	DC 12V
Product:	Head Unit	Temp.(°C)/Hum.(%):	20.2(°C)/56%
Model No.:	FERRARI NIT	Test Engineer:	Amy Hsu
Test Mode:	G-2462-TX		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	20448.000	31.38	18.55	49.93	74.00	-24.07	peak	100	174	

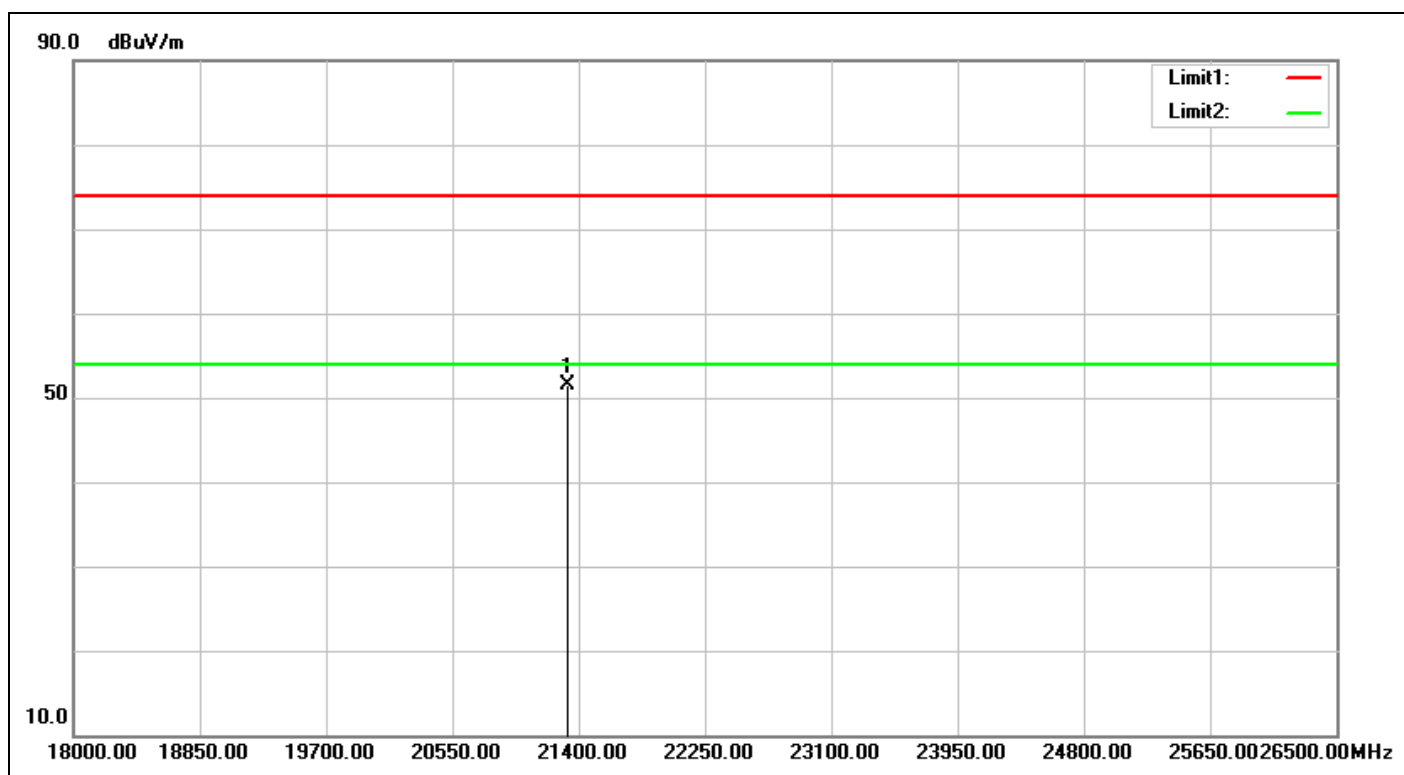


Service No.:	114056074(FERRARI NIT)-NCC-WIFI	Test Distance:	3m
Test Standard:	NCC Above 1G PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2018/3/1 20:28:37
Applicant:	Delphi Deutschland GmbH	Test Rating:	DC 12V
Product:	Head Unit	Temp.(°C)/Hum.(%):	20.2(°C)/56%
Model No.:	FERRARI NIT	Test Engineer:	Amy Hsu
Test Mode:	G-2462-TX		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	21323.500	32.73	18.79	51.52	74.00	-22.48	peak	100	167	

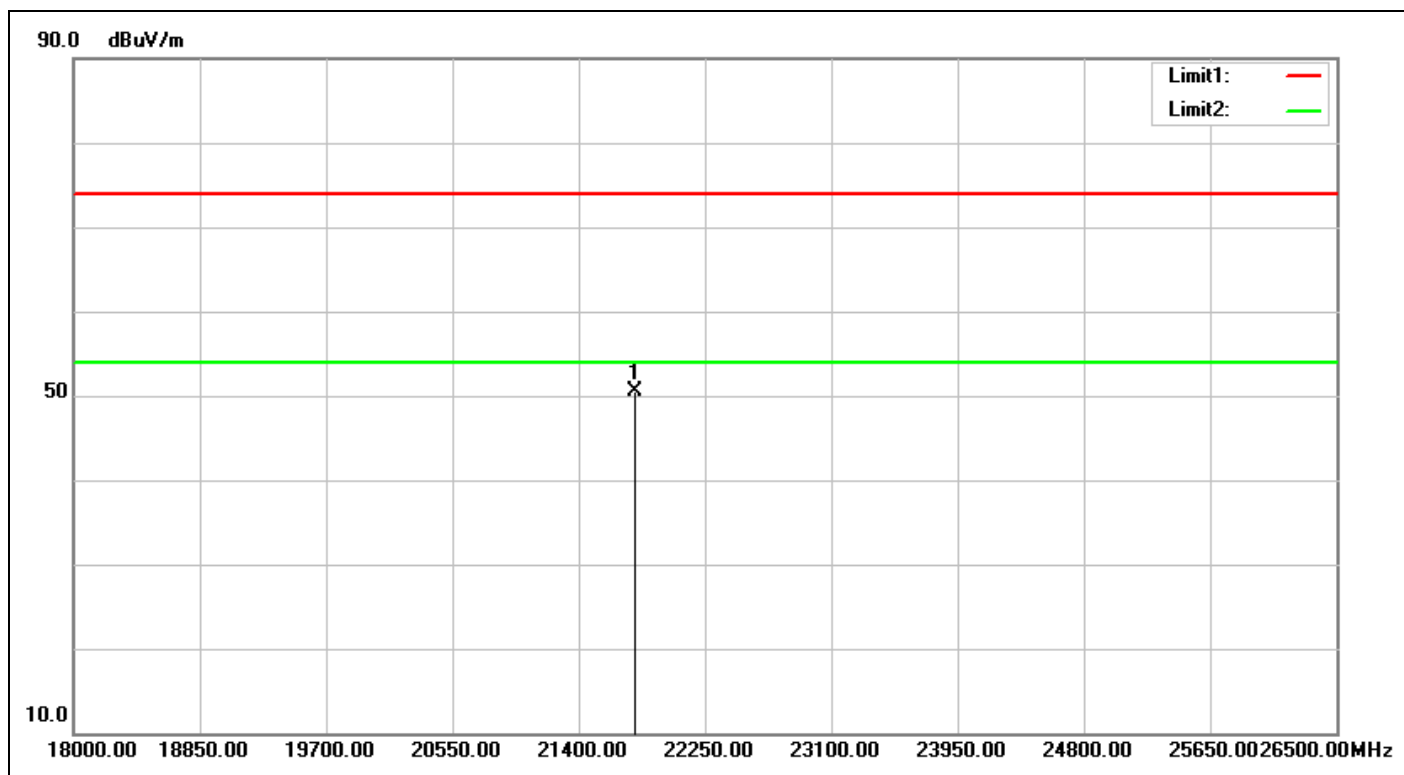


Service No.:	114056074(FERRARI NIT)-NCC-WIFI	Test Distance:	3m
Test Standard:	NCC Above 1G PEAK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2018/3/1 20:28:58
Applicant:	Delphi Deutschland GmbH	Test Rating:	DC 12V
Product:	Head Unit	Temp.(°C)/Hum.(%):	20.2(°C)/56%
Model No.:	FERRARI NIT	Test Engineer:	Amy Hsu
Test Mode:	N20-2412-TX		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	21782.500	32.72	17.75	50.47	74.00	-23.53	peak	100	168	

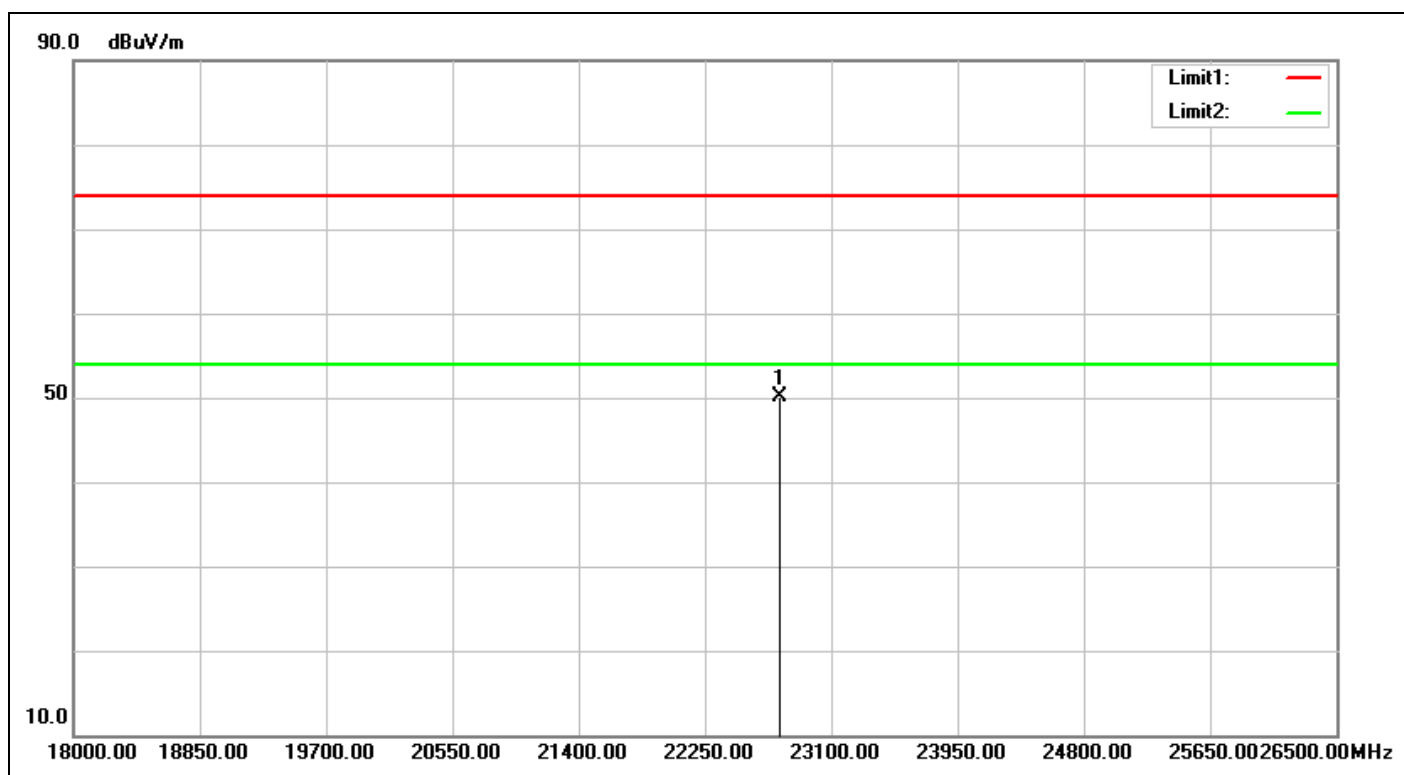


Service No.:	114056074(FERRARI NIT)-NCC-WIFI	Test Distance:	3m
Test Standard:	NCC Above 1G PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2018/3/1 20:29:10
Applicant:	Delphi Deutschland GmbH	Test Rating:	DC 12V
Product:	Head Unit	Temp.(°C)/Hum.(%):	20.2(°C)/56%
Model No.:	FERRARI NIT	Test Engineer:	Amy Hsu
Test Mode:	N20-2412-TX		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	22751.500	32.72	17.43	50.15	74.00	-23.85	peak	100	174	

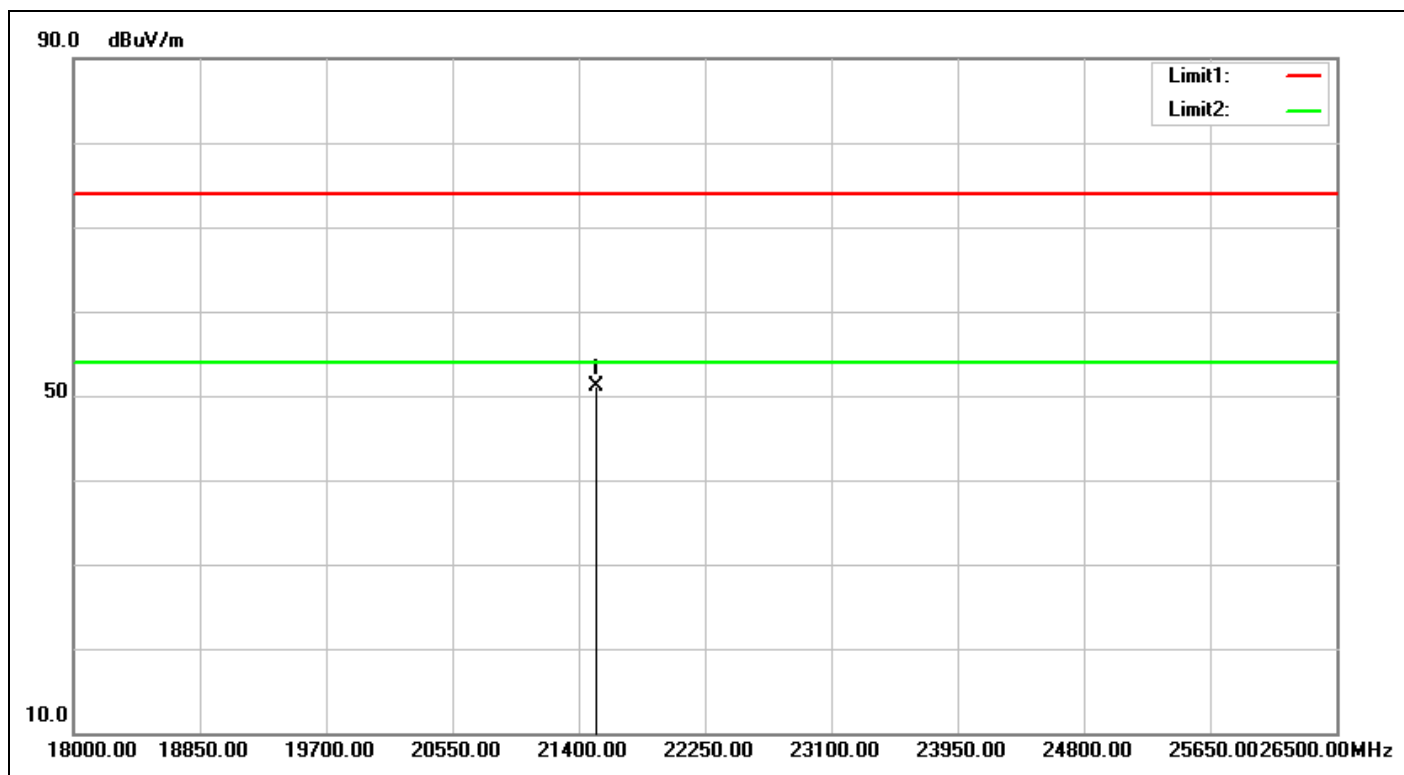


Service No.:	114056074(FERRARI NIT)-NCC-WIFI	Test Distance:	3m
Test Standard:	NCC Above 1G PEAK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2018/3/1 20:29:28
Applicant:	Delphi Deutschland GmbH	Test Rating:	DC 12V
Product:	Head Unit	Temp.(°C)/Hum.(%):	20.2(°C)/56%
Model No.:	FERRARI NIT	Test Engineer:	Amy Hsu
Test Mode:	N20-2437-TX		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	21519.000	32.88	18.15	51.03	74.00	-22.97	peak	100	63	

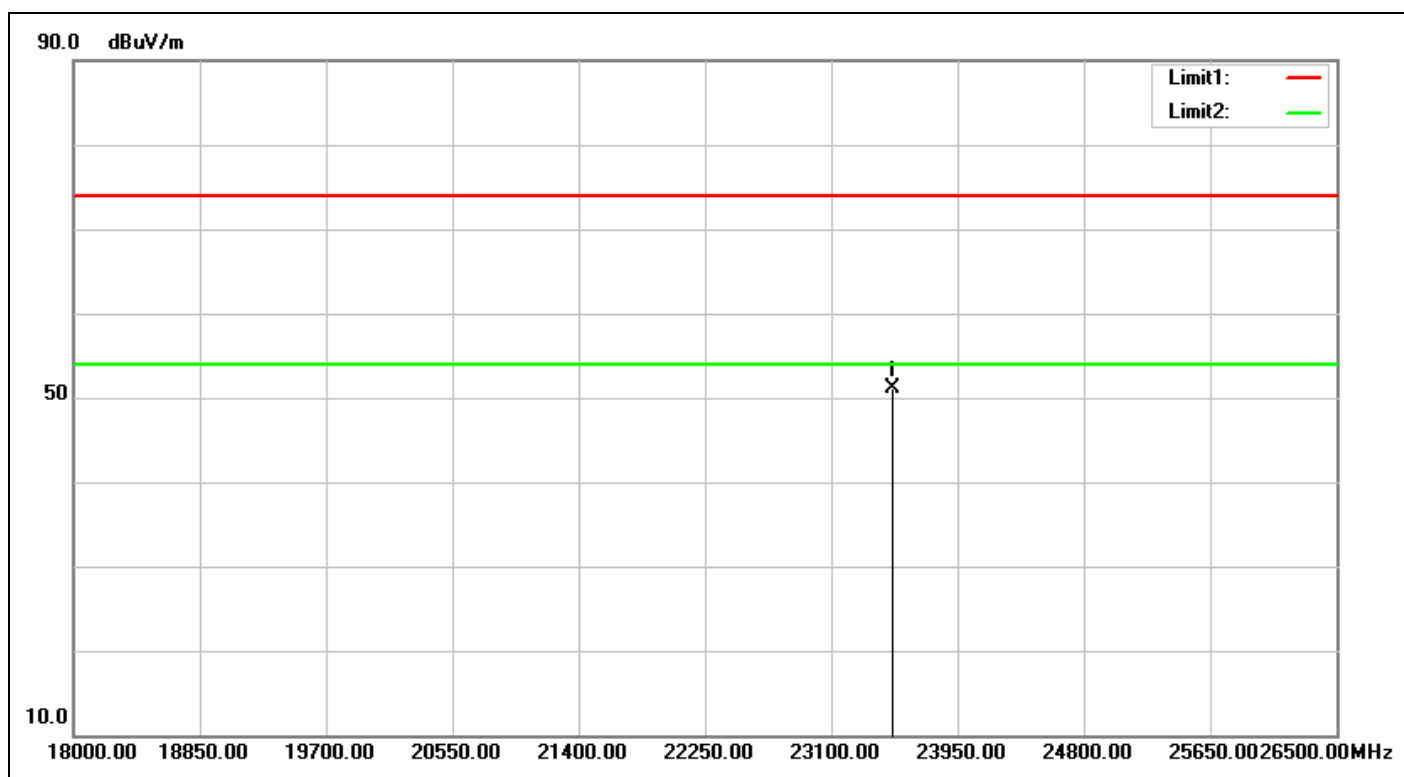


Service No.:	114056074(FERRARI NIT)-NCC-WIFI	Test Distance:	3m
Test Standard:	NCC Above 1G PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2018/3/1 20:29:39
Applicant:	Delphi Deutschland GmbH	Test Rating:	DC 12V
Product:	Head Unit	Temp.(°C)/Hum.(%):	20.2(°C)/56%
Model No.:	FERRARI NIT	Test Engineer:	Amy Hsu
Test Mode:	N20-2437-TX		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	23516.500	33.26	17.85	51.11	74.00	-22.89	peak	100	148	

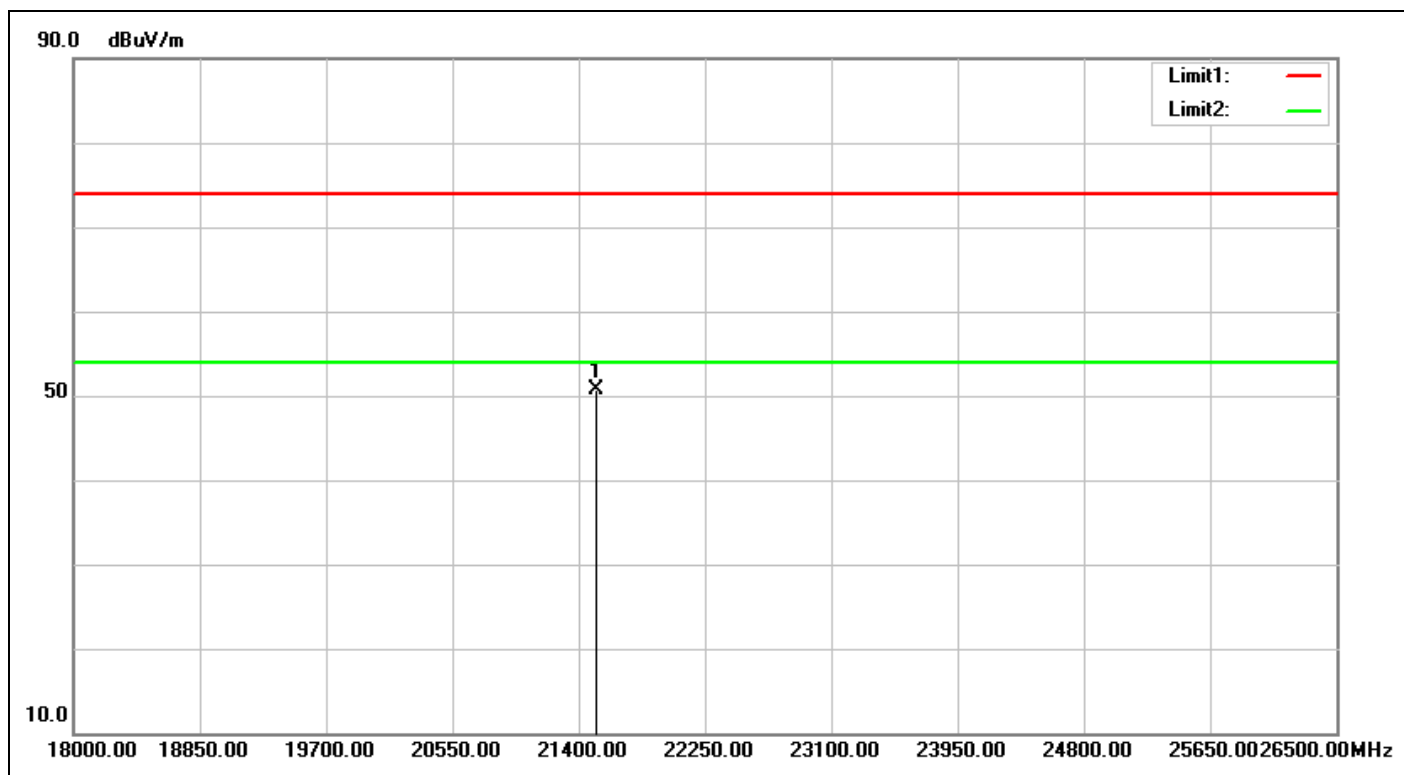

Service No.:	114056074(FERRARI NIT)-NCC-WIFI	Test Distance:	3m
Test Standard:	NCC Above 1G PEAK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2018/3/1 20:29:58
Applicant:	Delphi Deutschland GmbH	Test Rating:	DC 12V
Product:	Head Unit	Temp.(°C)/Hum.(%):	20.2(°C)/56%
Model No.:	FERRARI NIT	Test Engineer:	Amy Hsu
Test Mode:	N20-2462-TX		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	21519.000	32.88	17.92	50.80	74.00	-23.20	peak	100	134	

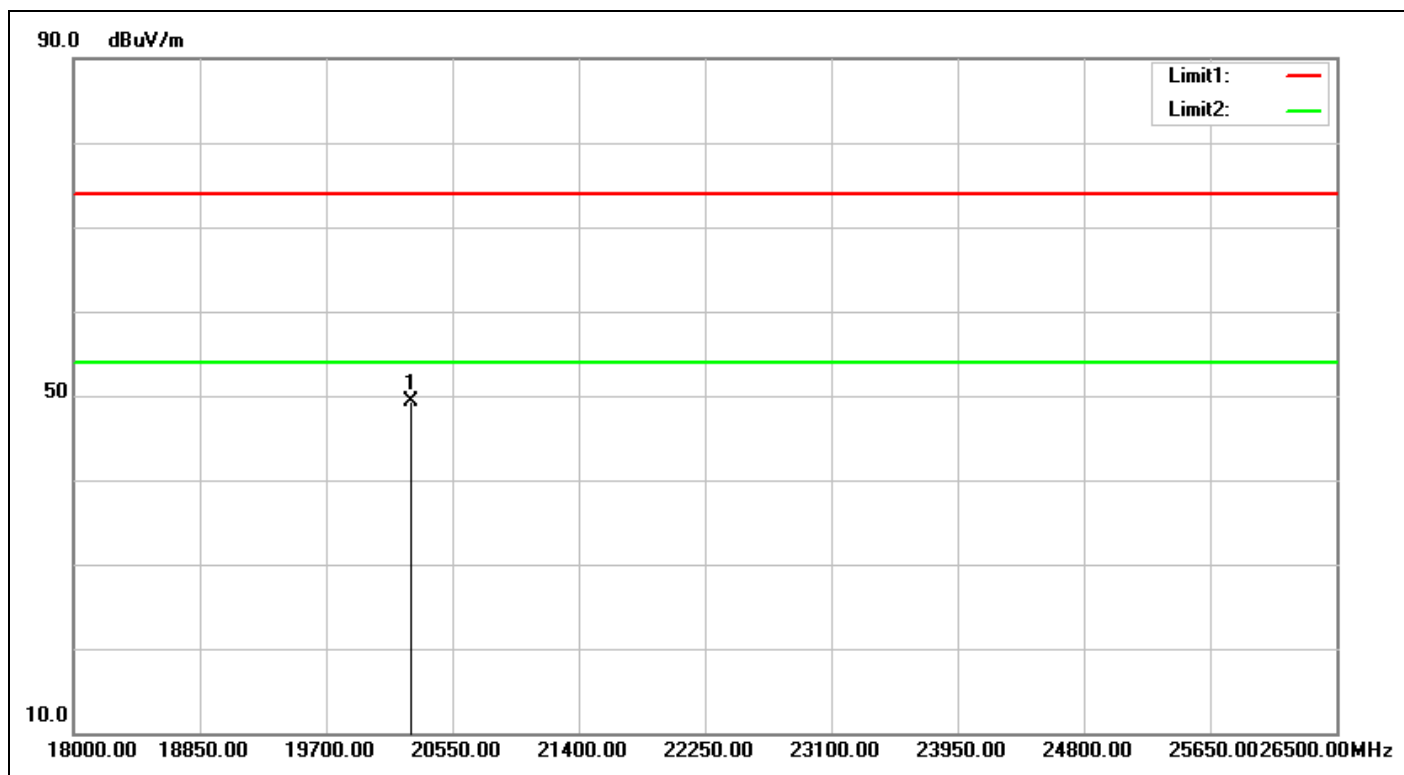

Service No.:	114056074(FERRARI NIT)-NCC-WIFI	Test Distance:	3m
Test Standard:	NCC Above 1G PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2018/3/1 20:30:10
Applicant:	Delphi Deutschland GmbH	Test Rating:	DC 12V
Product:	Head Unit	Temp.(°C)/Hum.(%):	20.2(°C)/56%
Model No.:	FERRARI NIT	Test Engineer:	Amy Hsu
Test Mode:	N20-2462-TX		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	20269.500	31.31	18.05	49.36	74.00	-24.64	peak	100	241	


Spurious Emissions, TX Mode, 30M-1G



TUV Rheinland Taiwan Ltd.

11F., No.758, Sec.4 Bade Road. Songshan Dist, Taipei City 105

Tel:+886-2172-7000 fax:+886-2528-0018

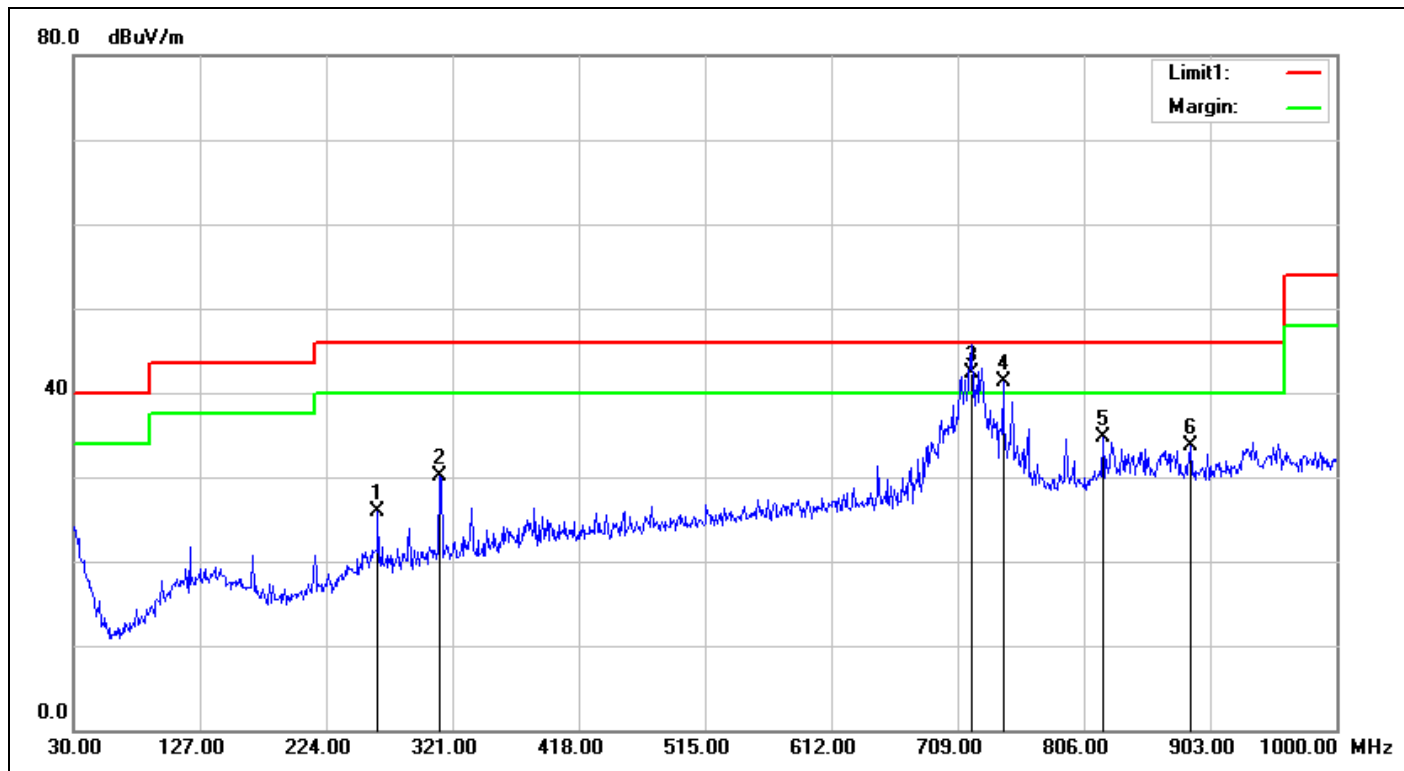

Service No.: 114056074(FERRARI NIT)-NCC-WIFI

Test Distance: 3m

Test Standard: NCC Class B 3M Radiation

Ant. Polarization: Horizontal

Test item: Radiation Emission

Test Time: 2018/3/1 21:27:47

Applicant: Delphi Deutschland GmbH

Test Rating: DC 12V

Product: Head Unit

Temp.(°C)/Hum.(%): 20(°C)/50%

Model No.: FERRARI NIT


Test Engineer: Amy Hsu

Test Mode: B-2437-TX

Remark:

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	263.7700	-5.11	31.02	25.91	46.00	-20.09	QP	100	125	
2	311.3000	-4.29	34.34	30.05	46.00	-15.95	QP	100	116	
3	719.6700	1.70	40.63	42.33	46.00	-3.67	QP	100	207	
4	743.9200	2.24	39.12	41.36	46.00	-4.64	QP	100	164	
5	820.5500	3.16	31.48	34.64	46.00	-11.36	QP	100	223	
6	888.4500	3.98	29.71	33.69	46.00	-12.31	QP	100	249	

Spurious Emissions, RX Mode, 1-18G

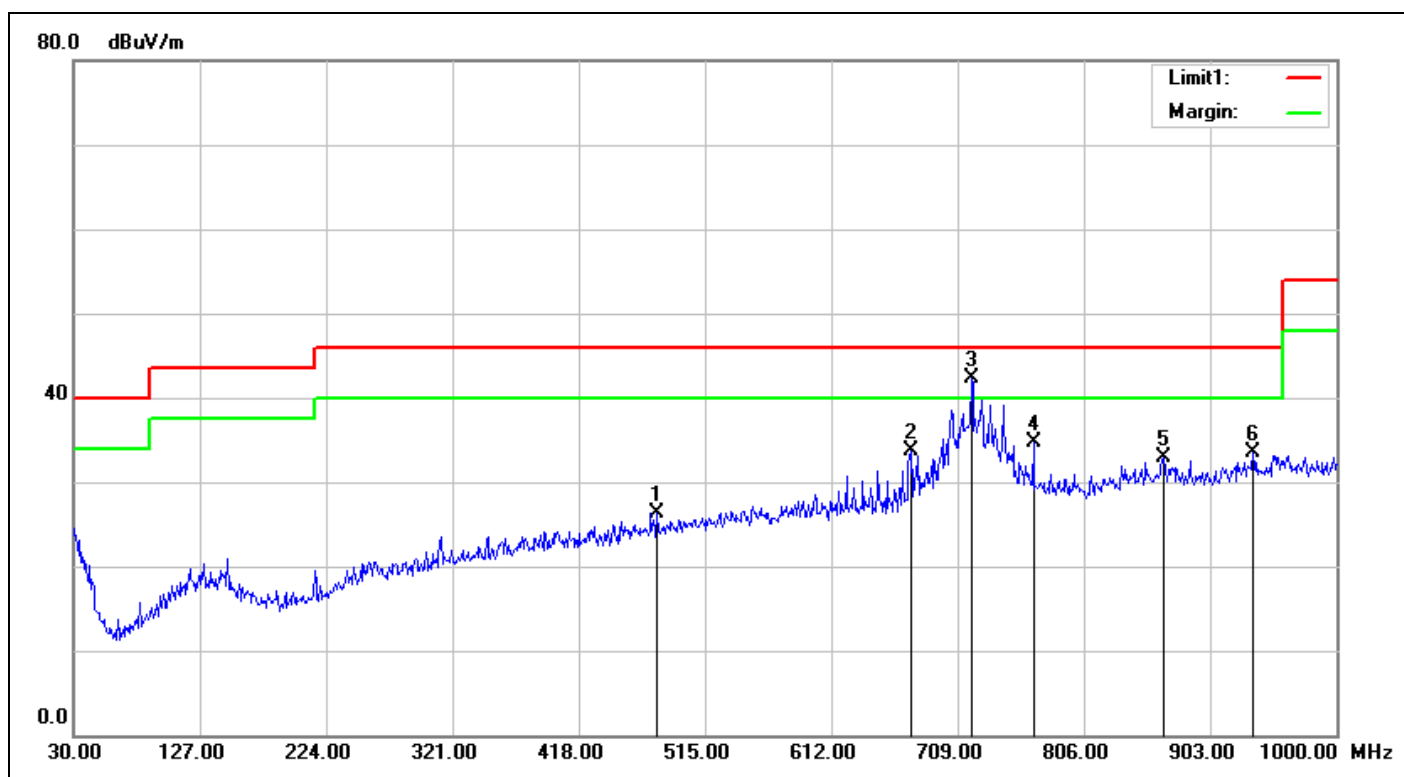

Service No.:	114056074(FERRARI NIT)-NCC-WIFI	Test Distance:	3m
Test Standard:	NCC Class B 3M Radiation	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2018/3/1 21:28:51
Applicant:	Delphi Deutschland GmbH	Test Rating:	DC 12V
Product:	Head Unit	Temp.(°C)/Hum.(%)	20(°C)/50%
Model No.:	FERRARI NIT	Test Engineer:	Amy Hsu
Test Mode:	B-2437-TX		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	478.1400	-1.49	27.82	26.33	46.00	-19.67	QP	100	325	
2	673.1100	0.87	32.85	33.72	46.00	-12.28	QP	100	162	
3	719.6700	1.70	40.55	42.25	46.00	-3.75	QP	100	56	
4	767.2000	2.50	32.24	34.74	46.00	-11.26	QP	100	162	
5	867.1100	3.83	29.11	32.94	46.00	-13.06	QP	100	269	
6	935.9800	5.09	28.43	33.52	46.00	-12.48	QP	100	336	


Spurious Emissions, TX Mode, 9k-30M



TUV Rheinland Taiwan Ltd.

11F., No.758, Sec.4 Bade Road. Songshan Dist, Taipei City 105


Tel:+886-2172-7000 fax:+886-2528-0018

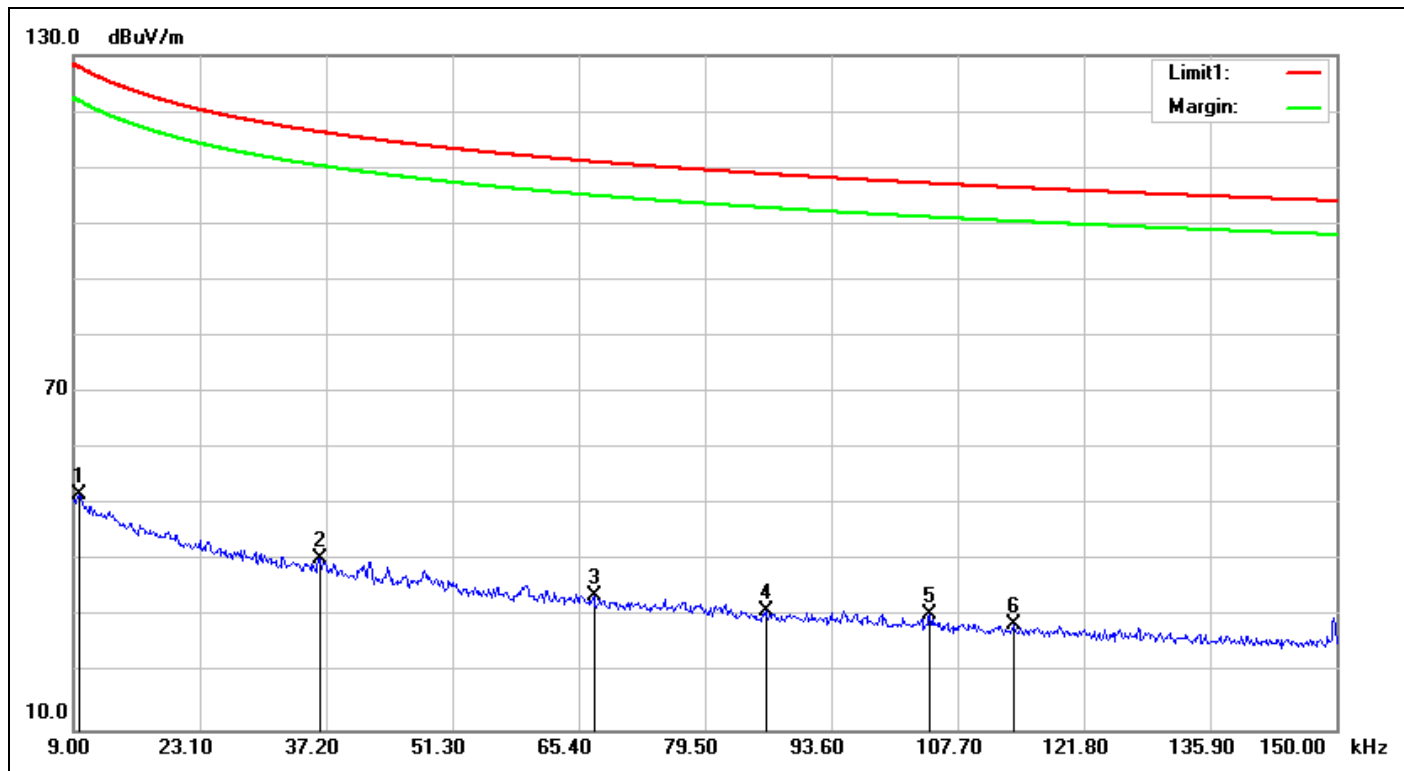

Service No.:	114056074(FERRARI NIT)-NCC-WIFI	Test Distance:	3m
Test Standard:	NCC2.8_9k-1G_3m	Ant. Polarization:	
Test item:	Radiation Emission	Test Time:	2018/3/1 21:48:11
Applicant:	Delphi Deutschland GmbH	Test Rating:	DC 12V
Product:	Head Unit	Temp.(°C)/Hum.(%)	20(°C)/50%
Model No.:	FERRARI NIT	Test Engineer:	Amy Hsu
Test Mode:	B-2437-TX		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	0.0095	19.73	32.07	51.80	128.03	-76.23	QP	100	168	
2	0.0364	19.91	20.45	40.36	116.37	-76.01	QP	100	147	
3	0.0670	19.33	14.60	33.93	111.07	-77.14	QP	100	208	
4	0.0862	19.21	11.83	31.04	108.89	-77.85	QP	100	116	
5	0.1045	19.13	11.39	30.52	107.21	-76.69	QP	100	152	
6	0.1140	19.12	9.75	28.87	106.46	-77.59	QP	100	234	

Spurious Emissions, RX Mode, 1-18G

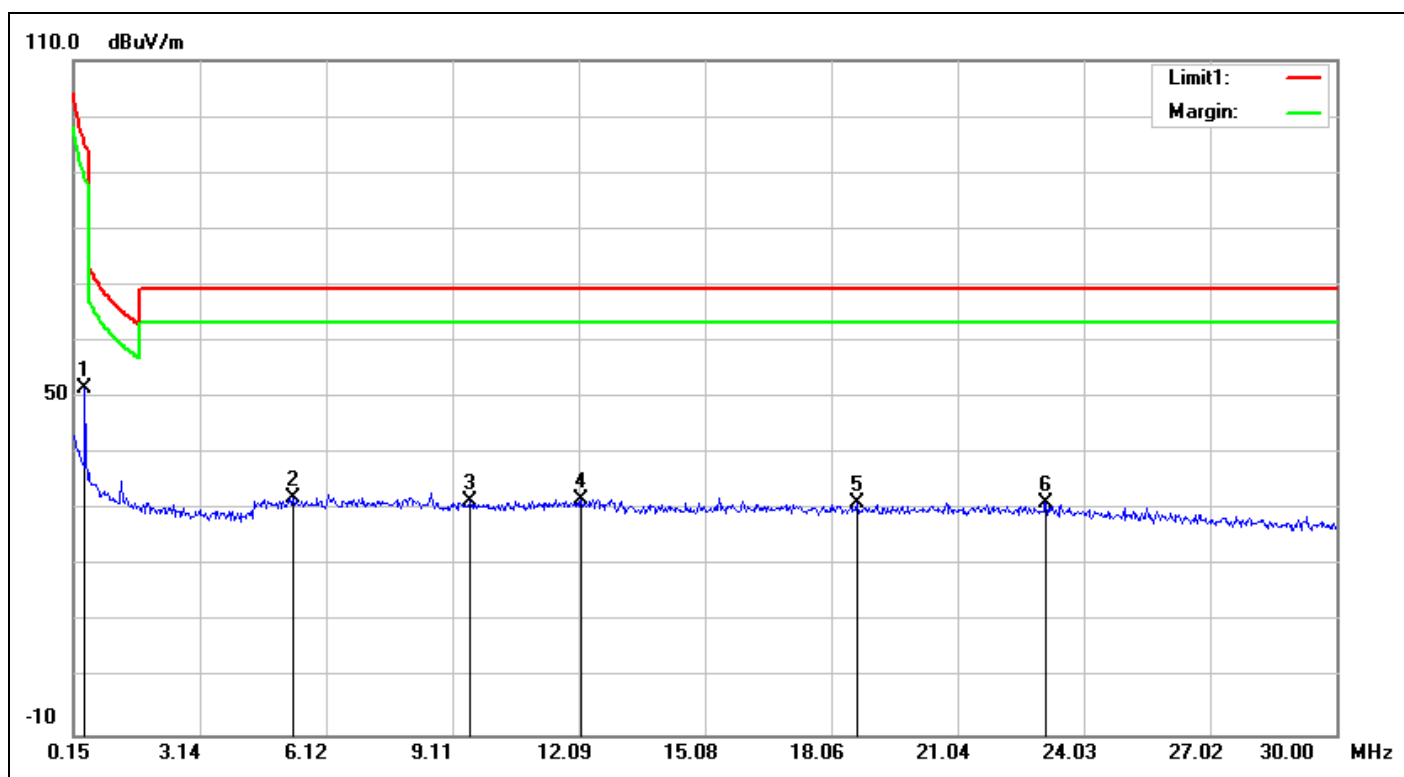

Service No.:	114056074(FERRARI NIT)-NCC-WIFI	Test Distance:	3m
Test Standard:	NCC2.8_9k-1G_3m	Ant. Polarization:	
Test item:	Radiation Emission	Test Time:	2018/3/1 21:51:42
Applicant:	Delphi Deutschland GmbH	Test Rating:	DC 12V
Product:	Head Unit	Temp.(°C)/Hum.(%)	20(°C)/50%
Model No.:	FERRARI NIT	Test Engineer:	Amy Hsu
Test Mode:	B-2437-RX		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	0.4186	18.89	32.88	51.77	95.17	-43.40	QP	100	158	
2	5.3439	19.79	12.51	32.30	69.50	-37.20	QP	100	235	
3	9.5229	20.17	11.48	31.65	69.50	-37.85	QP	100	167	
4	12.1497	20.60	11.34	31.94	69.50	-37.56	QP	100	246	
5	18.6570	21.75	9.58	31.33	69.50	-38.17	QP	100	116	
6	23.1345	22.20	9.19	31.39	69.50	-38.11	QP	100	264	


Spurious Emissions, RX Mode, 1-18G



TUV Rheinland Taiwan Ltd.


11F., No.758, Sec.4 Bade Road. Songshan Dist, Taipei City 105

Tel:+886-2172-7000 fax:+886-2528-0018

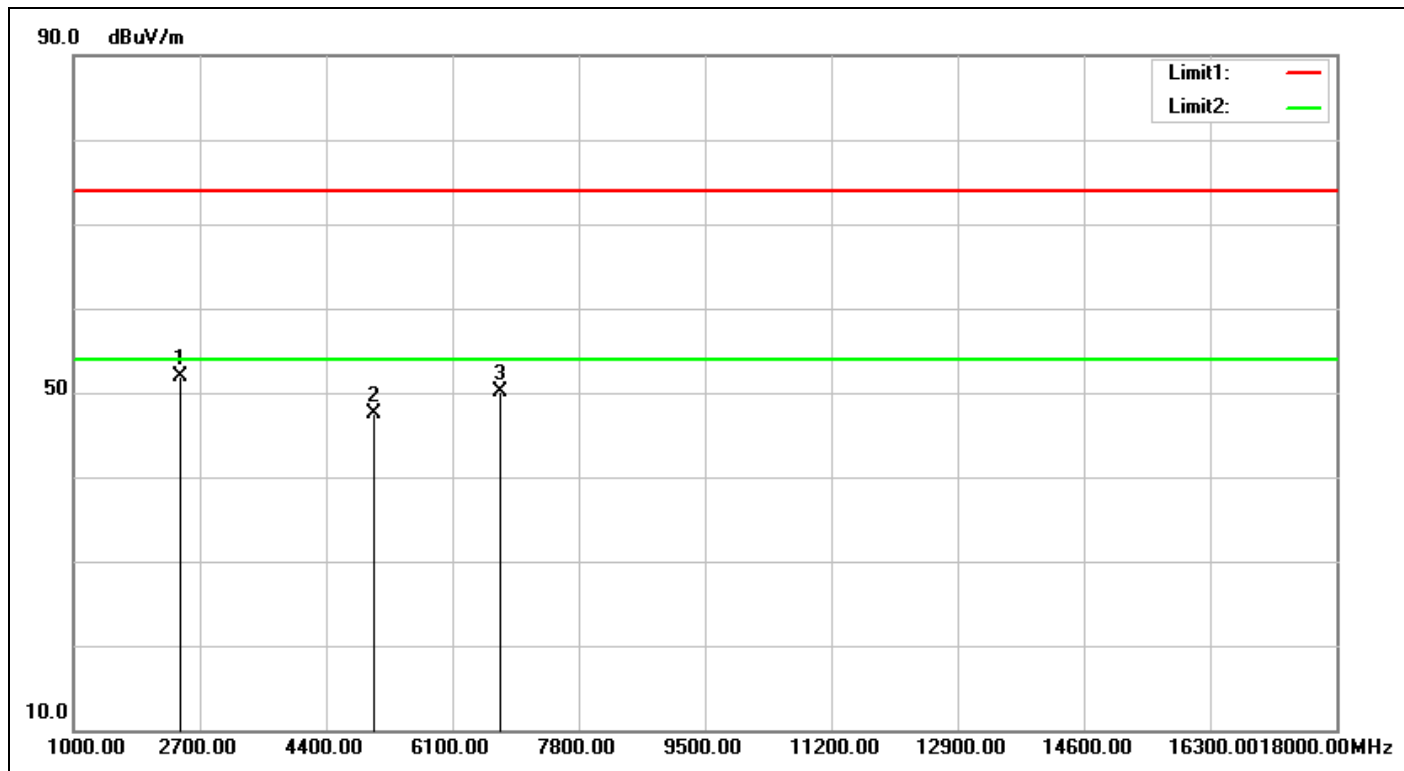

Service No.:	114056074(FERRARI NIT)-NCC-WIFI	Test Distance:	3m
Test Standard:	NCC Above 1G PEAK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2018/3/1 20:08:34
Applicant:	Delphi Deutschland GmbH	Test Rating:	DC 12V
Product:	Head Unit	Temp.(°C)/Hum.(%):	20.2(°C)/56%
Model No.:	FERRARI NIT	Test Engineer:	Amy Hsu
Test Mode:	B-2437-RX		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	2428.000	-8.06	59.94	51.88	74.00	-22.12	peak	100	127	
2	5046.000	-2.99	50.52	47.53	74.00	-26.47	peak	100	165	
3	6746.000	4.01	46.12	50.13	74.00	-23.87	peak	100	132	

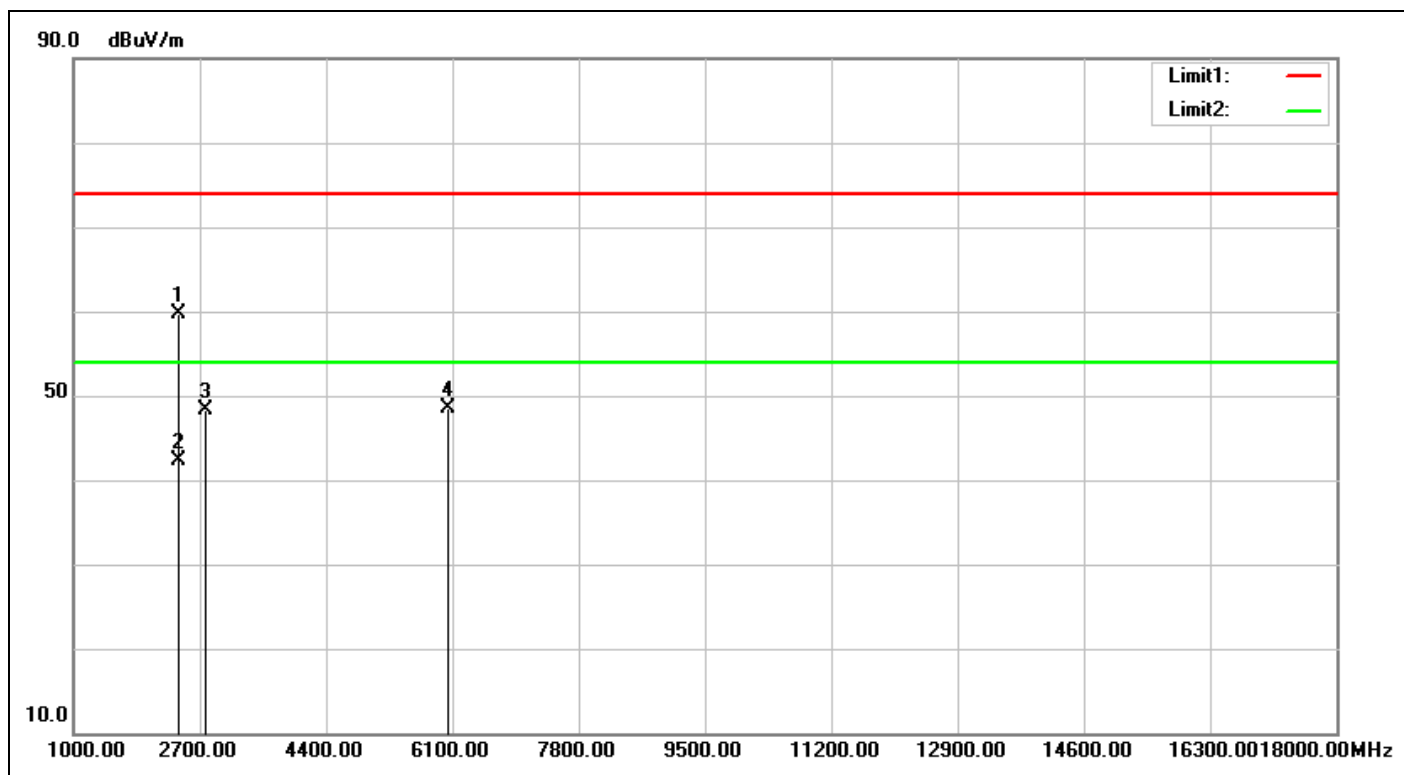

Service No.:	114056074(FERRARI NIT)-NCC-WIFI	Test Distance:	3m
Test Standard:	NCC Above 1G PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2018/3/1 20:09:37
Applicant:	Delphi Deutschland GmbH	Test Rating:	DC 12V
Product:	Head Unit	Temp.(°C)/Hum.(%)	20.2(°C)/56%
Model No.:	FERRARI NIT	Test Engineer:	Amy Hsu
Test Mode:	B-2437-RX		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	2411.000	-8.06	67.86	59.80	74.00	-14.20	peak	100	204	
2	2411.000	-8.06	50.37	42.31	54.00	-11.69	AVG	100	204	
3	2768.000	-7.58	55.87	48.29	74.00	-25.71	peak	100	81	
4	6032.000	2.48	46.05	48.53	74.00	-25.47	peak	100	358	


Spurious Emissions, RX Mode, 18-26G



TUV Rheinland Taiwan Ltd.


11F., No.758, Sec.4 Bade Road. Songshan Dist, Taipei City 105

Tel:+886-2172-7000 fax:+886-2528-0018

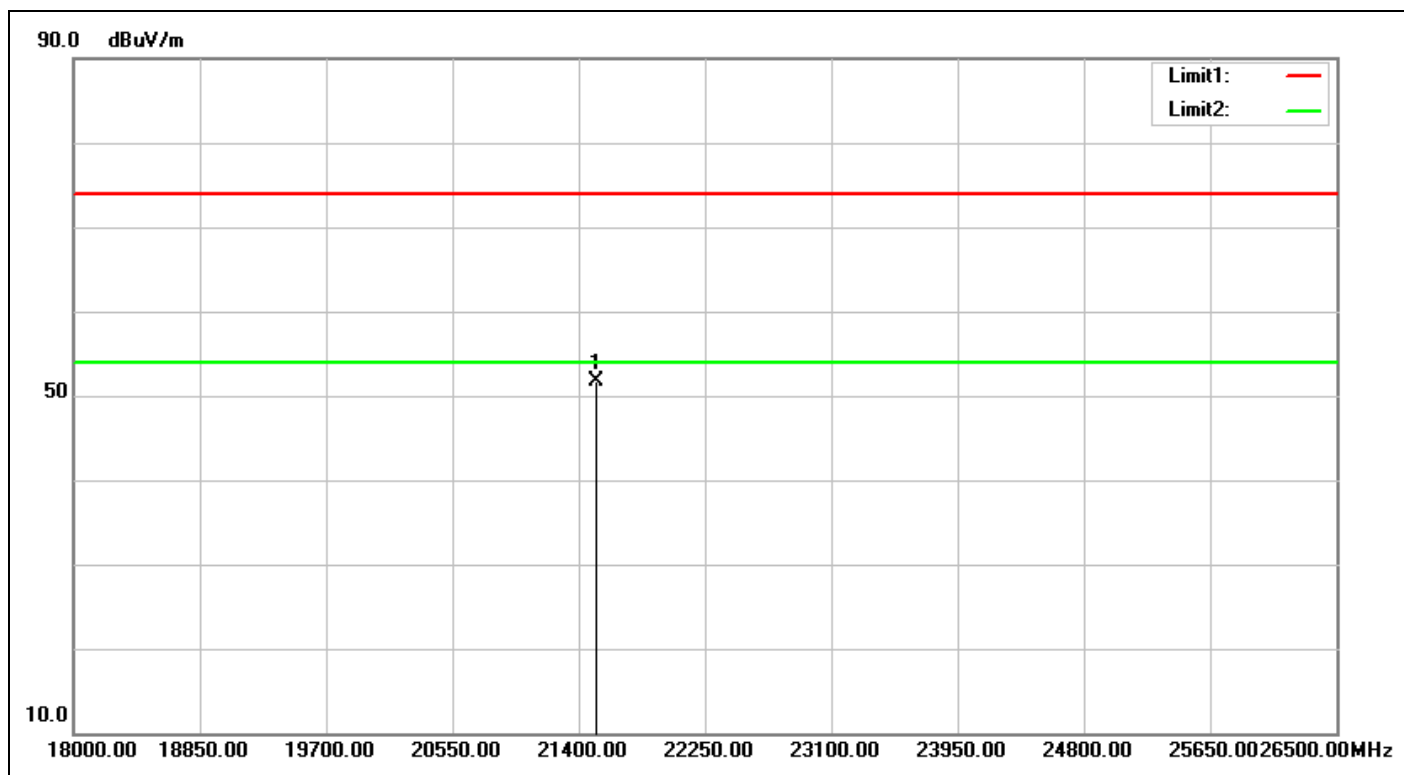

Service No.:	114056074(FERRARI NIT)-NCC-WIFI	Test Distance:	3m
Test Standard:	NCC Above 1G PEAK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2018/3/1 20:30:36
Applicant:	Delphi Deutschland GmbH	Test Rating:	DC 12V
Product:	Head Unit	Temp.(°C)/Hum.(%):	20.2(°C)/56%
Model No.:	FERRARI NIT	Test Engineer:	Amy Hsu
Test Mode:	B-2437-RX		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	21519.000	32.88	18.83	51.71	74.00	-22.29	peak	100	146	

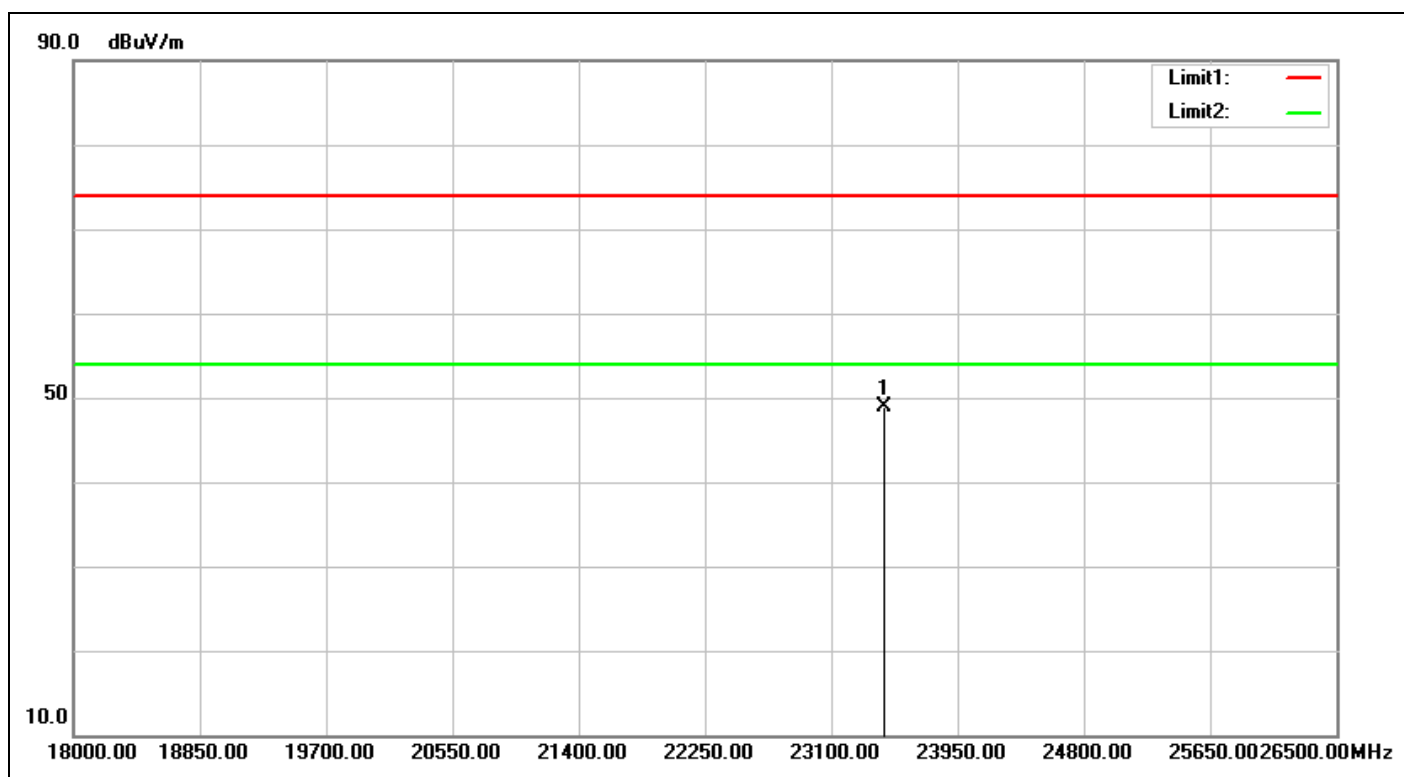

Service No.:	114056074(FERRARI NIT)-NCC-WIFI	Test Distance:	3m
Test Standard:	NCC Above 1G PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2018/3/1 20:30:54
Applicant:	Delphi Deutschland GmbH	Test Rating:	DC 12V
Product:	Head Unit	Temp.(°C)/Hum.(%):	20.2(°C)/56%
Model No.:	FERRARI NIT	Test Engineer:	Amy Hsu
Test Mode:	B-2437-RX		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	23457.000	33.23	15.68	48.91	74.00	-25.09	peak	100	134	


Spurious Emissions, RX Mode, 30M-1G



TUV Rheinland Taiwan Ltd.

11F., No.758, Sec.4 Bade Road. Songshan Dist, Taipei City 105


Tel:+886-2172-7000 fax:+886-2528-0018

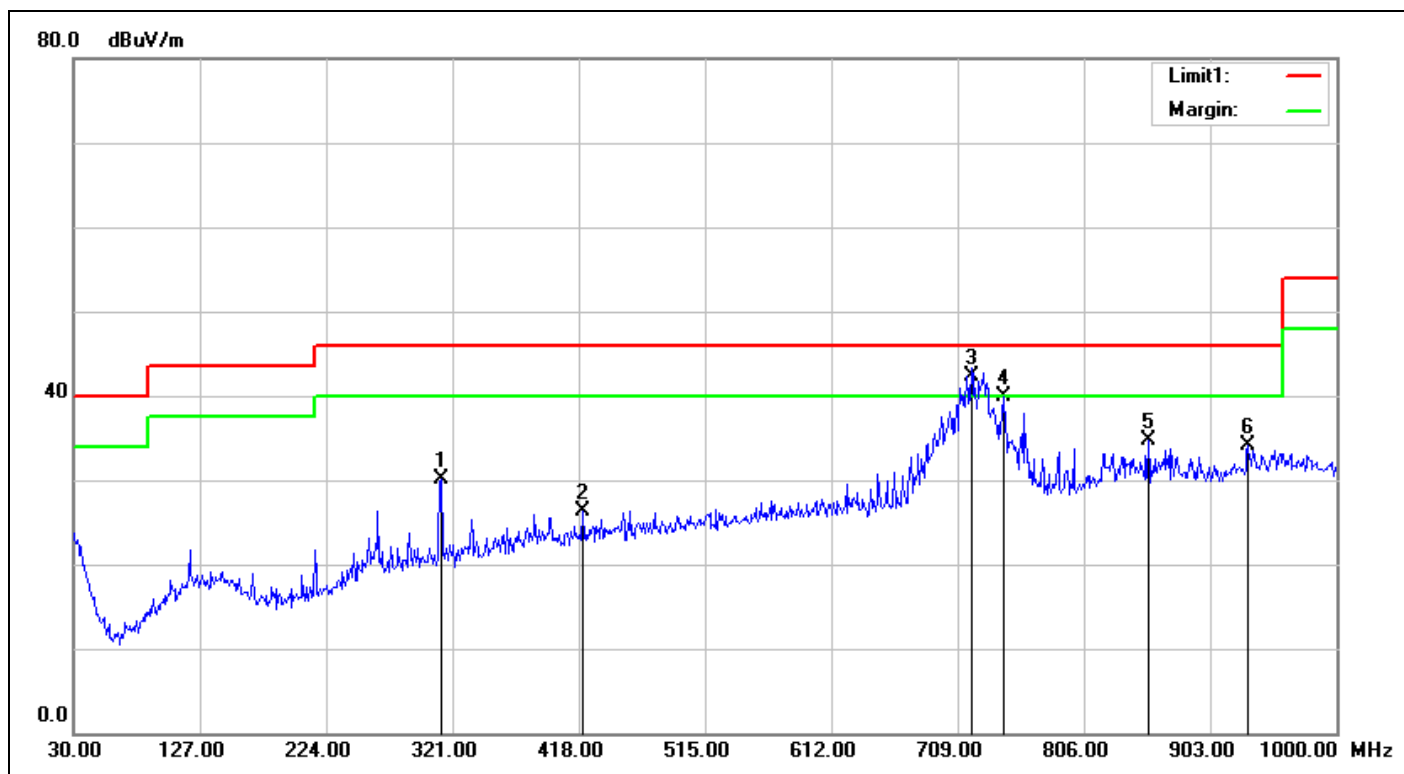

Service No.:	114056074(FERRARI NIT)-NCC-WIFI	Test Distance:	3m
Test Standard:	NCC Class B 3M Radiation	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2018/3/1 21:31:17
Applicant:	Delphi Deutschland GmbH	Test Rating:	DC 12V
Product:	Head Unit	Temp.(°C)/Hum.(%):	20(°C)/50%
Model No.:	FERRARI NIT	Test Engineer:	Amy Hsu
Test Mode:	B-2437-RX		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	312.2700	-4.26	34.45	30.19	46.00	-15.81	QP	100	196	
2	420.9100	-2.22	28.58	26.36	46.00	-19.64	QP	100	228	
3	719.6700	1.70	40.66	42.36	46.00	-3.64	QP	100	213	
4	743.9200	2.24	37.66	39.90	46.00	-6.10	QP	100	148	
5	855.4700	3.75	30.92	34.67	46.00	-11.33	QP	100	116	
6	932.1000	4.98	29.07	34.05	46.00	-11.95	QP	100	278	

Spurious Emissions, RX Mode, 30M-1G

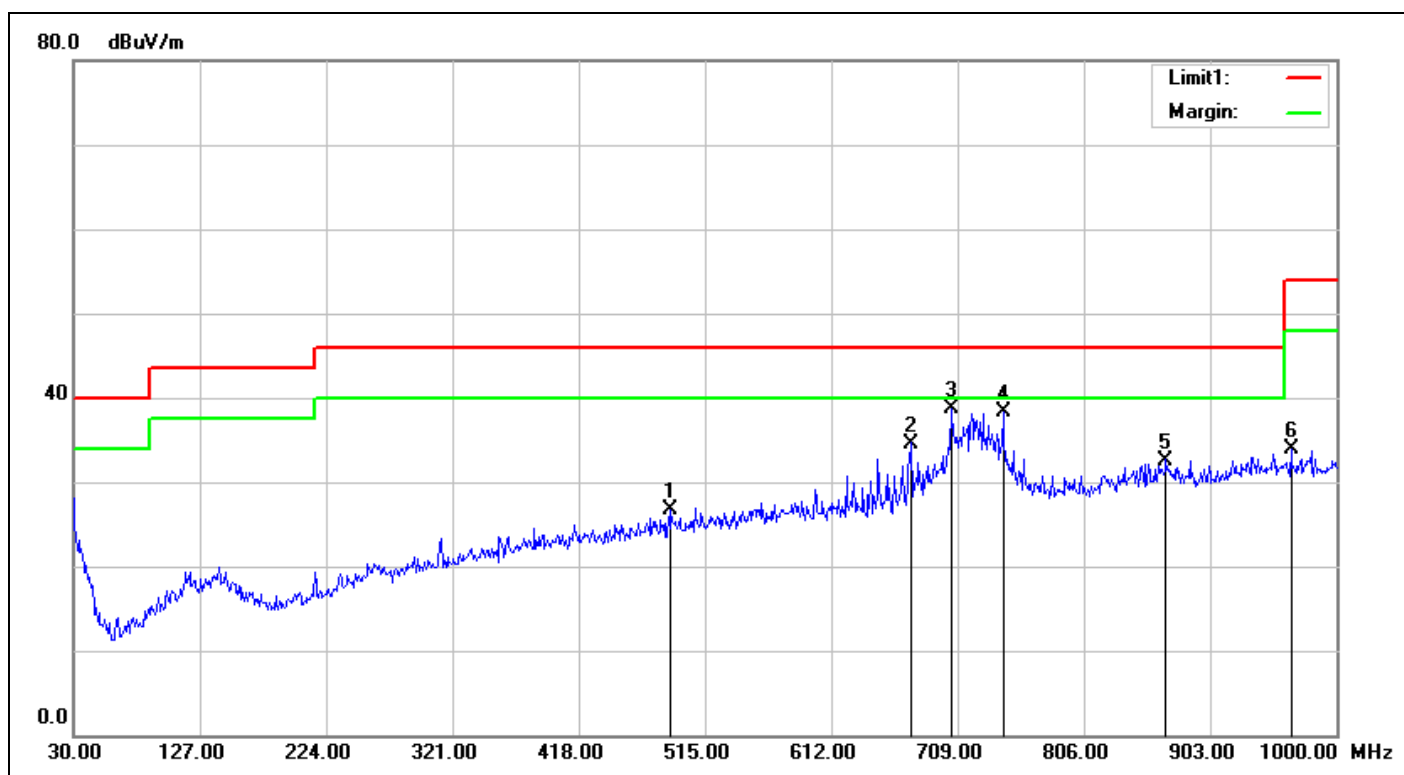

Service No.:	114056074(FERRARI NIT)-NCC-WIFI	Test Distance:	3m
Test Standard:	NCC Class B 3M Radiation	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2018/3/1 21:32:21
Applicant:	Delphi Deutschland GmbH	Test Rating:	DC 12V
Product:	Head Unit	Temp.(°C)/Hum.(%)	20(°C)/50%
Model No.:	FERRARI NIT	Test Engineer:	Amy Hsu
Test Mode:	B-2437-RX		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	488.8100	-1.34	28.07	26.73	46.00	-19.27	QP	100	317	
2	673.1100	0.87	33.73	34.60	46.00	-11.40	QP	100	3	
3	704.1500	1.35	37.38	38.73	46.00	-7.27	QP	100	95	
4	743.9200	2.24	36.01	38.25	46.00	-7.75	QP	100	170	
5	869.0500	3.85	28.75	32.60	46.00	-13.40	QP	100	175	
6	965.0800	5.57	28.34	33.91	54.00	-20.09	QP	100	277	


Spurious Emissions, RX Mode, 9K-30M



TUV Rheinland Taiwan Ltd.

11F., No.758, Sec.4 Bade Road. Songshan Dist, Taipei City 105


Tel:+886-2172-7000 fax:+886-2528-0018

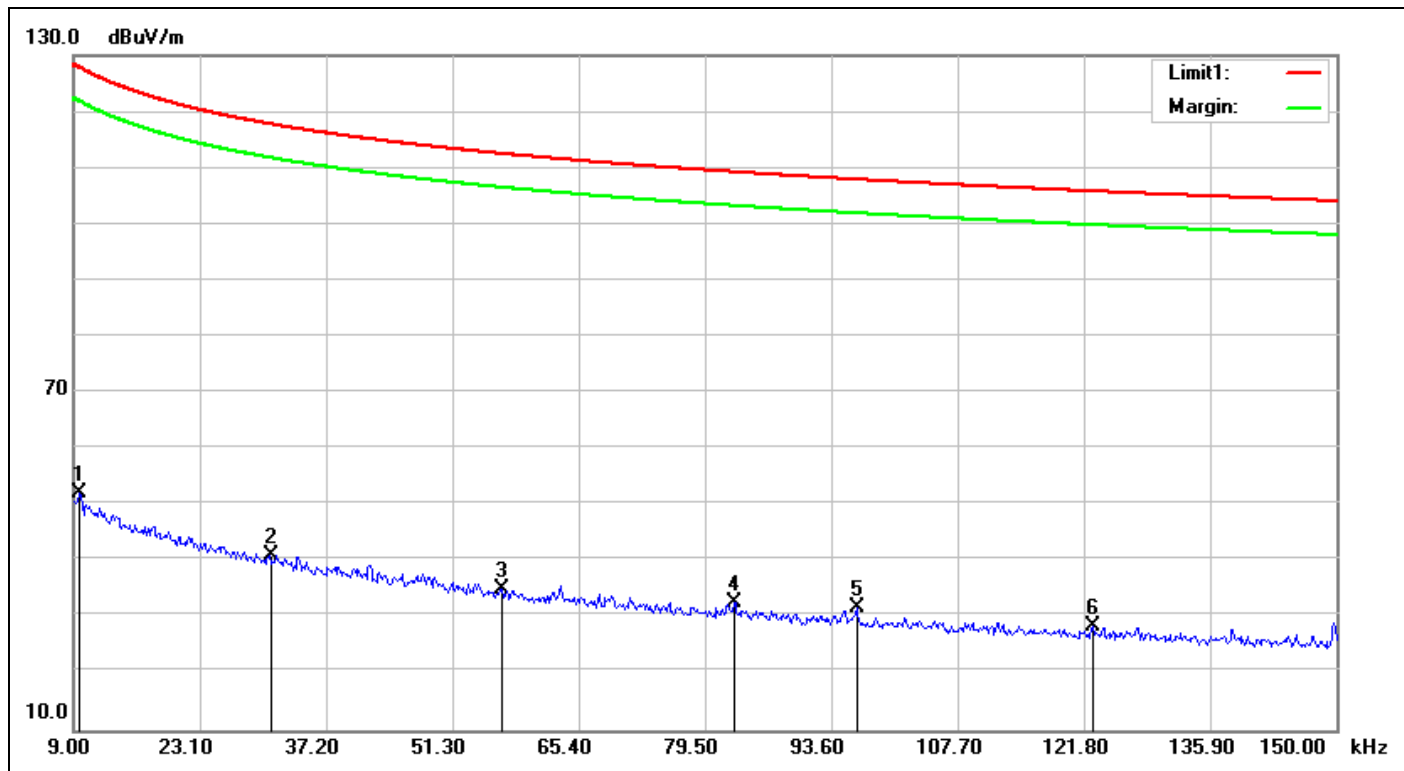

Service No.:	114056074(FERRARI NIT)-NCC-WIFI	Test Distance:	3m
Test Standard:	NCC2.8_9k-1G_3m	Ant. Polarization:	
Test item:	Radiation Emission	Test Time:	2018/3/1 21:49:14
Applicant:	Delphi Deutschland GmbH	Test Rating:	DC 12V
Product:	Head Unit	Temp.(°C)/Hum.(%)	20(°C)/50%
Model No.:	FERRARI NIT	Test Engineer:	Amy Hsu
Test Mode:	B-2437-RX		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	0.0097	19.81	32.20	52.01	127.85	-75.84	QP	100	357	
2	0.0309	20.10	20.89	40.99	117.79	-76.80	QP	100	264	
3	0.0567	19.39	15.61	35.00	112.52	-77.52	QP	100	307	
4	0.0827	19.23	13.35	32.58	109.25	-76.67	QP	100	269	
5	0.0964	19.15	12.58	31.73	107.91	-76.18	QP	100	72	
6	0.1228	19.11	9.29	28.40	105.81	-77.41	QP	100	229	

Spurious Emissions, RX Mode, 30M-1G

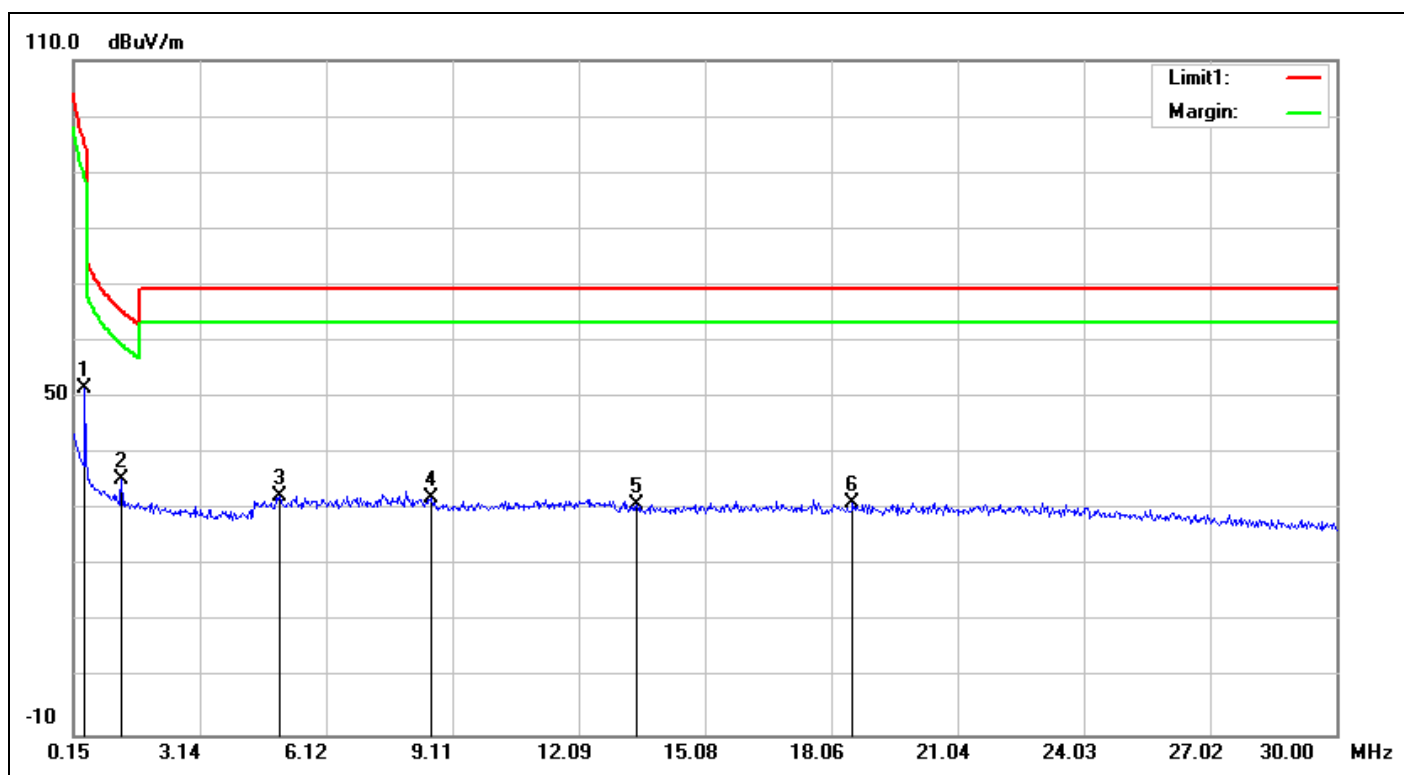

Service No.:	114056074(FERRARI NIT)-NCC-WIFI	Test Distance:	3m
Test Standard:	NCC2.8_9k-1G_3m	Ant. Polarization:	
Test item:	Radiation Emission	Test Time:	2018/3/1 21:52:45
Applicant:	Delphi Deutschland GmbH	Test Rating:	DC 12V
Product:	Head Unit	Temp.(°C)/Hum.(%):	20(°C)/50%
Model No.:	FERRARI NIT	Test Engineer:	Amy Hsu
Test Mode:	B-2437-RX		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	0.4187	18.89	32.86	51.75	95.17	-43.42	QP	100	202	
2	1.2843	18.92	16.62	35.54	65.45	-29.91	QP	100	189	
3	5.0156	19.76	12.75	32.51	69.50	-36.99	QP	100	30	
4	8.5976	20.09	11.93	32.02	69.50	-37.48	QP	100	149	
5	13.4631	20.83	10.11	30.94	69.50	-38.56	QP	100	16	
6	18.5675	21.74	9.58	31.32	69.50	-38.18	QP	100	253	