


Site: AC1	Time: 2019/06/28 - 03:07
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D	Polarity: Horizontal
EUT: Aruba 500 接入點	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at channel 5530MHz Ant 0 + 1	

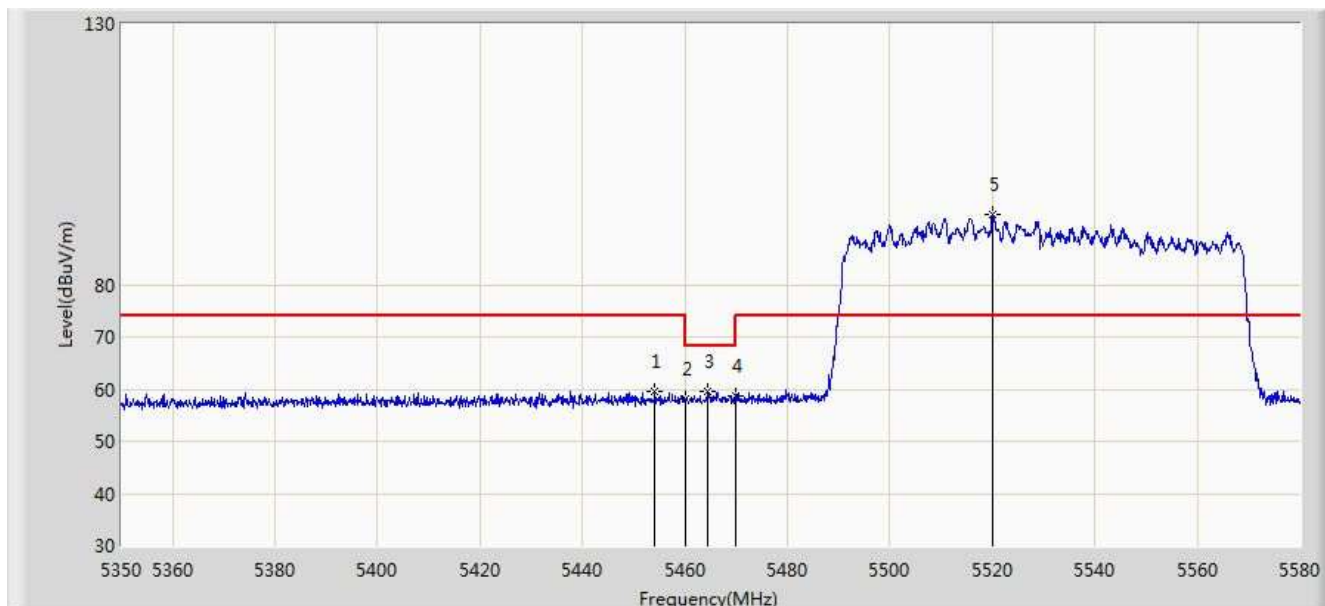


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5454.075	59.678	55.547	-14.322	74.000	4.131	PK
2			5460.000	58.144	54.008	-15.856	74.000	4.136	PK
3			5464.540	59.514	55.374	-8.686	68.200	4.140	PK
4			5470.000	58.573	54.429	-9.627	68.200	4.144	PK
5		*	5519.970	93.375	89.128	N/A	N/A	4.247	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2019/06/28 - 03:09
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D	Polarity: Horizontal
EUT: Aruba 500 接入點	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at channel 5530MHz Ant 0 + 1	

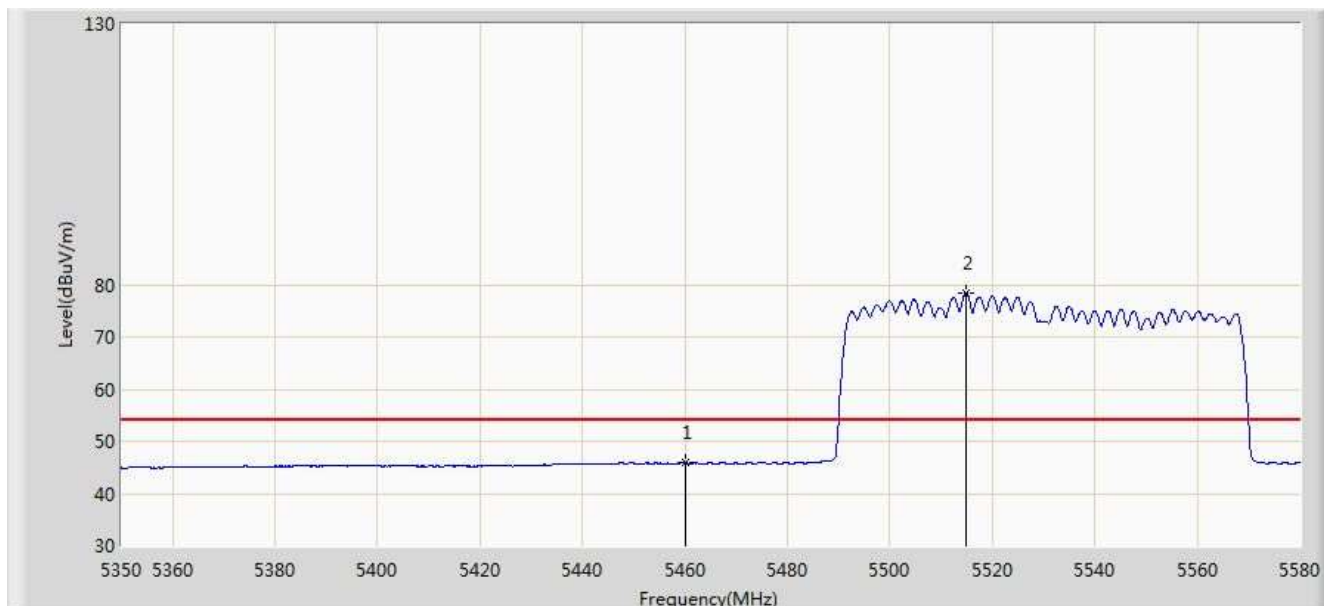


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	45.852	41.716	-8.148	54.000	4.136	AV
2		*	5514.795	78.346	74.119	N/A	N/A	4.228	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2019/06/28 - 03:02
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D	Polarity: Vertical
EUT: Aruba 500 接入點	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at channel 5530MHz Ant 0 + 1	

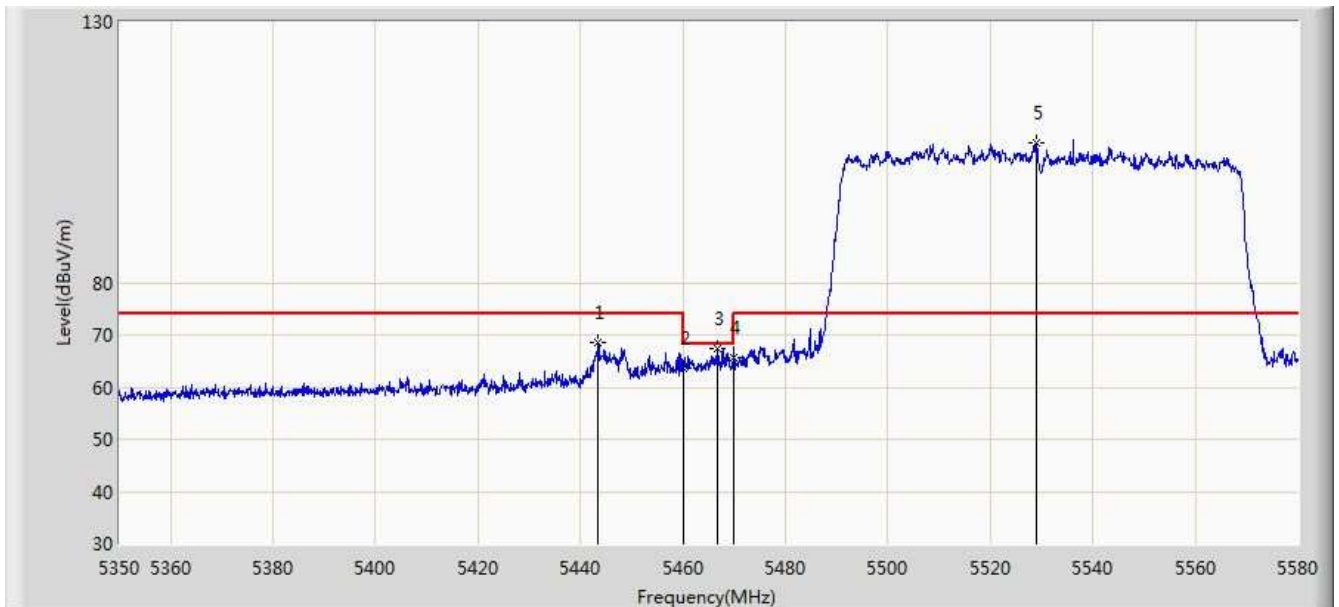


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5443.495	68.555	64.433	-5.445	74.000	4.122	PK
2			5460.000	63.480	59.344	-10.520	74.000	4.136	PK
3			5466.725	67.432	63.290	-0.768	68.200	4.142	PK
4			5470.000	65.698	61.554	-2.502	68.200	4.144	PK
5		*	5528.940	106.848	102.567	N/A	N/A	4.281	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2019/06/28 - 03:05
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D	Polarity: Vertical
EUT: Aruba 500 接入點	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at channel 5530MHz Ant 0 + 1	

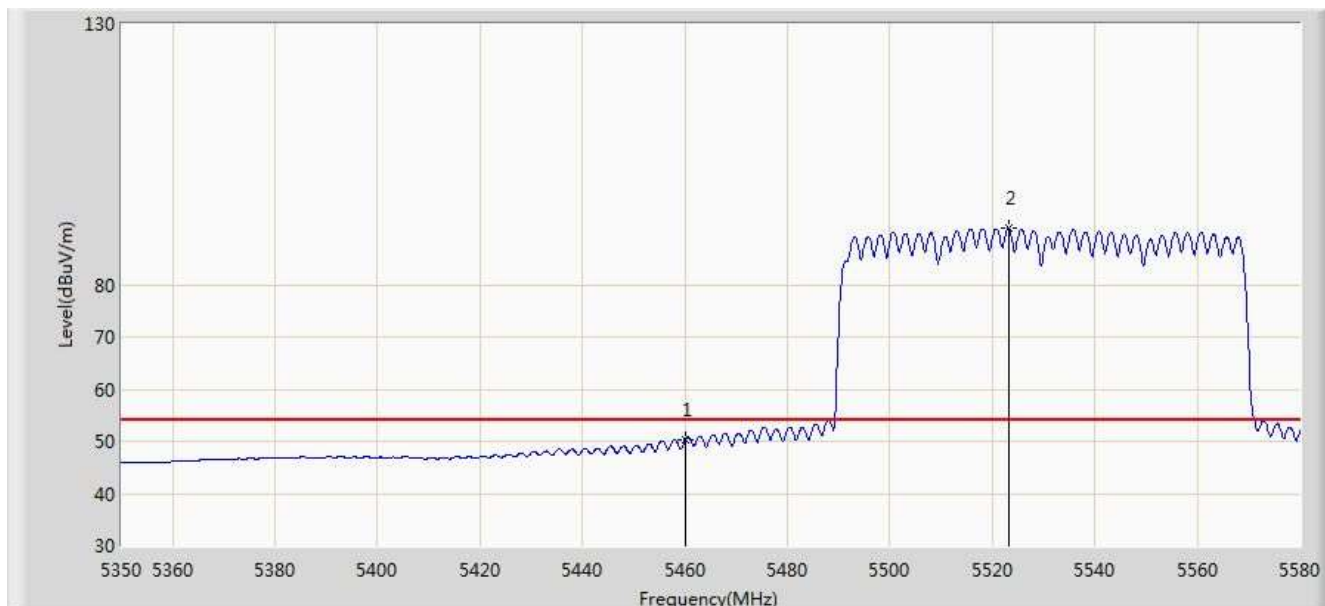


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	50.260	46.124	-3.740	54.000	4.136	AV
2		*	5523.305	90.744	86.484	N/A	N/A	4.260	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2019/06/28 - 03:13
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D	Polarity: Horizontal
EUT: Aruba 500 接入點	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at channel 5610MHz Ant 0 + 1	

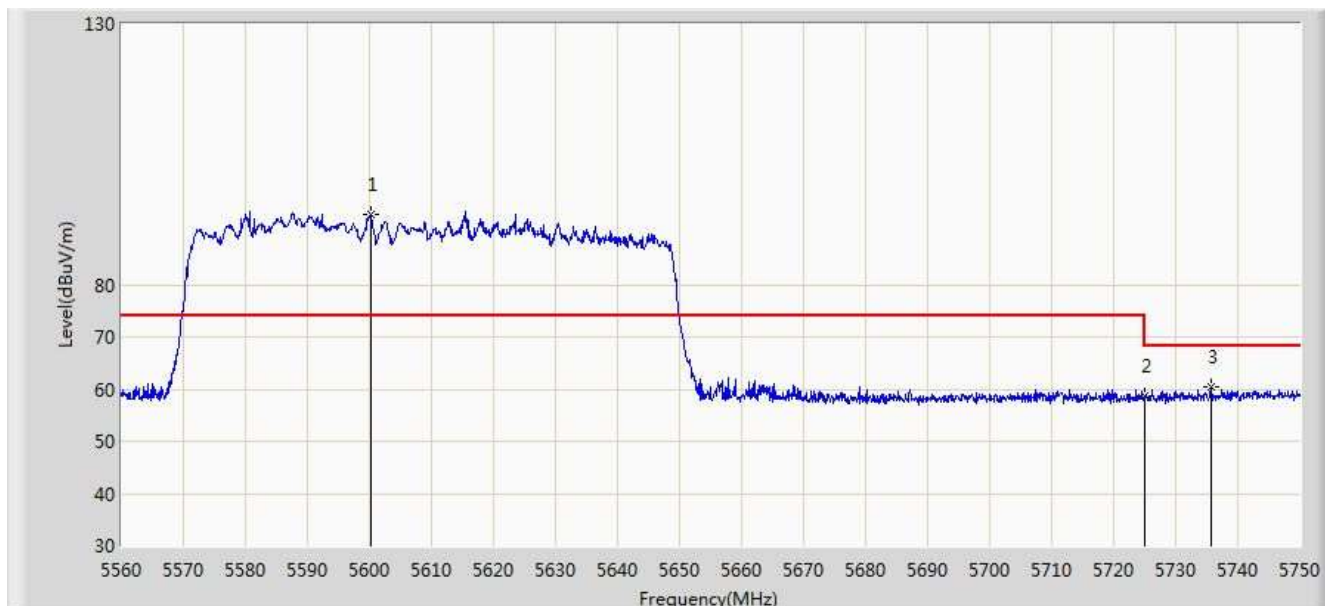


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5600.185	93.442	88.888	N/A	N/A	4.555	PK
2			5725.000	58.573	53.539	-9.627	68.200	5.034	PK
3			5735.655	60.524	55.449	-7.676	68.200	5.075	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2019/06/28 - 03:10
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D	Polarity: Vertical
EUT: Aruba 500 接入點	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at channel 5610MHz Ant 0 + 1	

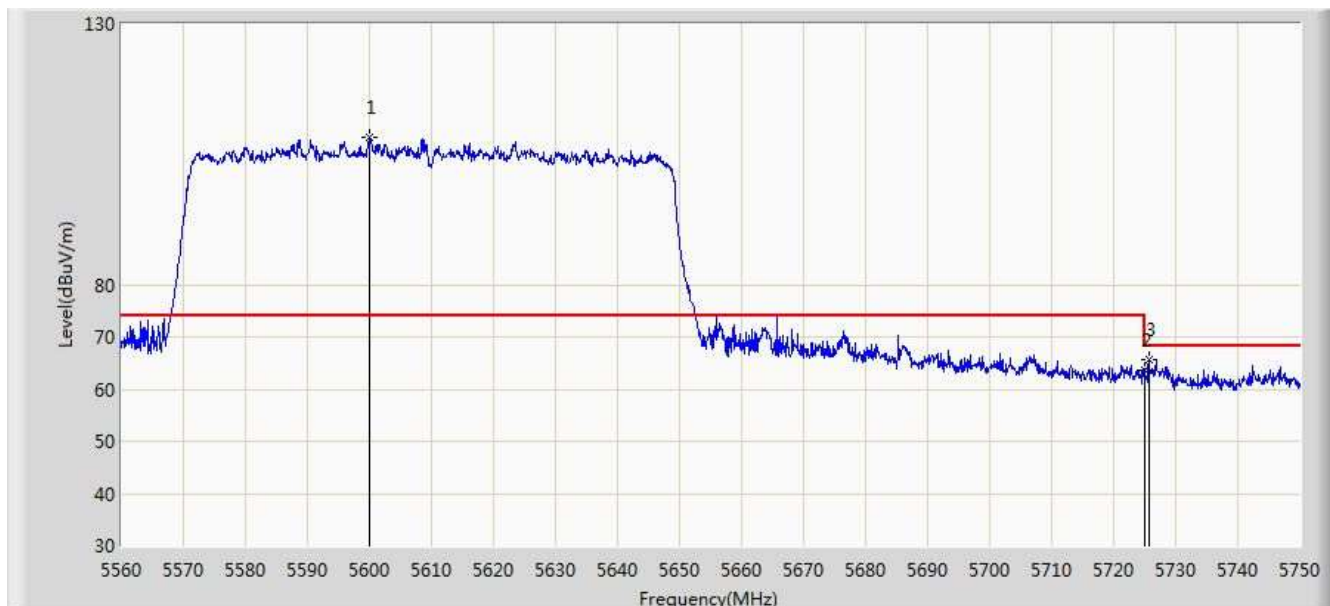


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5599.995	108.235	103.681	N/A	N/A	4.554	PK
2			5725.000	63.632	58.598	-4.568	68.200	5.034	PK
3			5725.680	65.786	60.750	-2.414	68.200	5.036	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2019/06/28 - 03:15
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D	Polarity: Horizontal
EUT: Aruba 500 接入點	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at channel 5775MHz Ant 0 + 1	

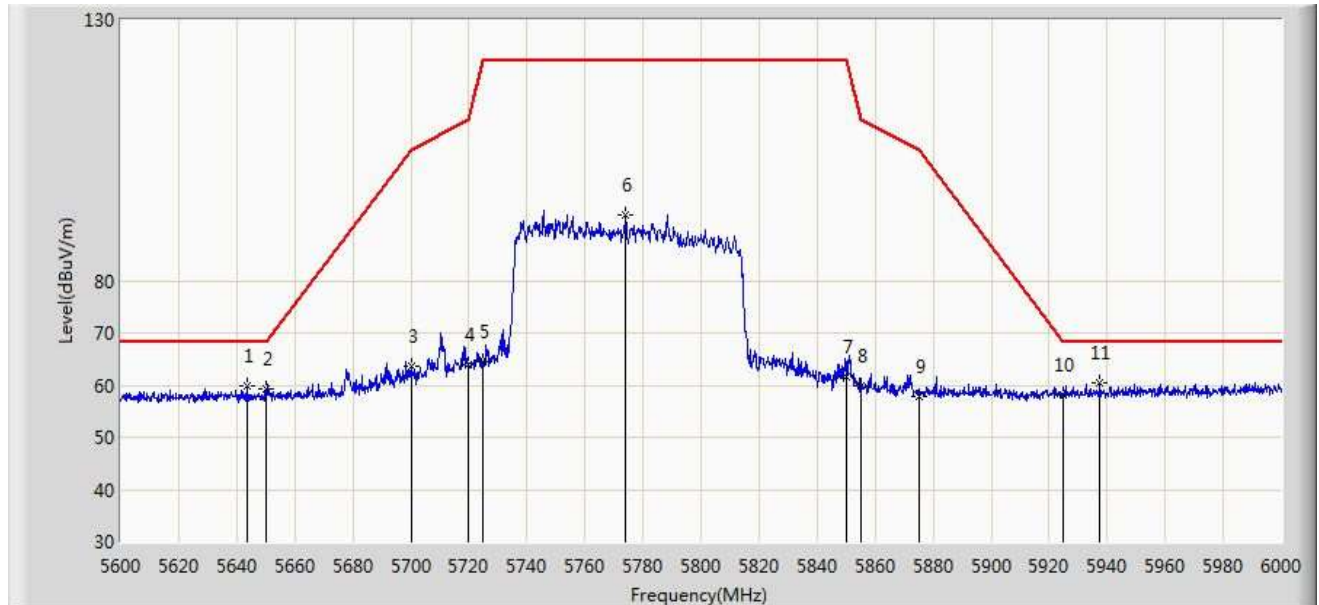


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5643.400	59.713	54.992	-8.487	68.200	4.721	PK
2			5650.000	59.219	54.473	-8.981	68.200	4.746	PK
3			5700.000	63.565	58.627	-41.635	105.200	4.938	PK
4			5720.000	63.969	58.954	-46.831	110.800	5.015	PK
5			5725.000	64.428	59.394	-57.772	122.200	5.034	PK
6			5774.000	92.613	87.391	N/A	N/A	5.222	PK
7			5850.000	61.538	56.024	-60.662	122.200	5.514	PK
8			5855.000	59.987	54.454	-50.813	110.800	5.533	PK
9			5875.000	57.846	52.236	-47.354	105.200	5.610	PK
10			5925.000	58.177	52.375	-10.023	68.200	5.802	PK
11		*	5937.400	60.382	54.532	-7.818	68.200	5.850	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2019/06/28 - 03:17
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D	Polarity: Vertical
EUT: Aruba 500 接入點	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at channel 5775MHz Ant 0 + 1	

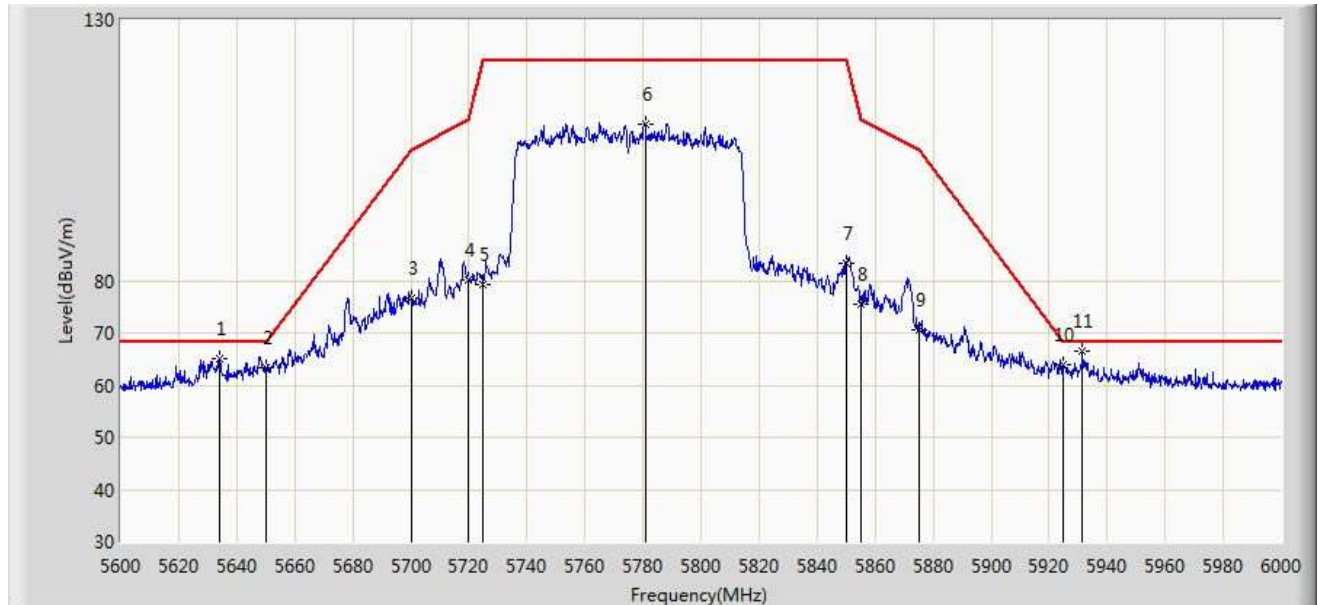


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5634.200	64.965	60.279	-3.235	68.200	4.686	PK
2			5650.000	63.234	58.488	-4.966	68.200	4.746	PK
3			5700.000	76.613	71.675	-28.587	105.200	4.938	PK
4			5720.000	80.207	75.192	-30.593	110.800	5.015	PK
5			5725.000	79.160	74.126	-43.040	122.200	5.034	PK
6			5780.800	110.052	104.803	N/A	N/A	5.249	PK
7			5850.000	83.312	77.798	-38.888	122.200	5.514	PK
8			5855.000	75.416	69.883	-35.384	110.800	5.533	PK
9			5875.000	70.557	64.947	-34.643	105.200	5.610	PK
10			5925.000	63.775	57.973	-4.425	68.200	5.802	PK
11		*	5931.400	66.528	60.701	-1.672	68.200	5.827	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2019/06/28 - 00:37
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D	Polarity: Horizontal
EUT: Aruba 500 接入點	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at channel 5190MHz Ant 0 + 1	

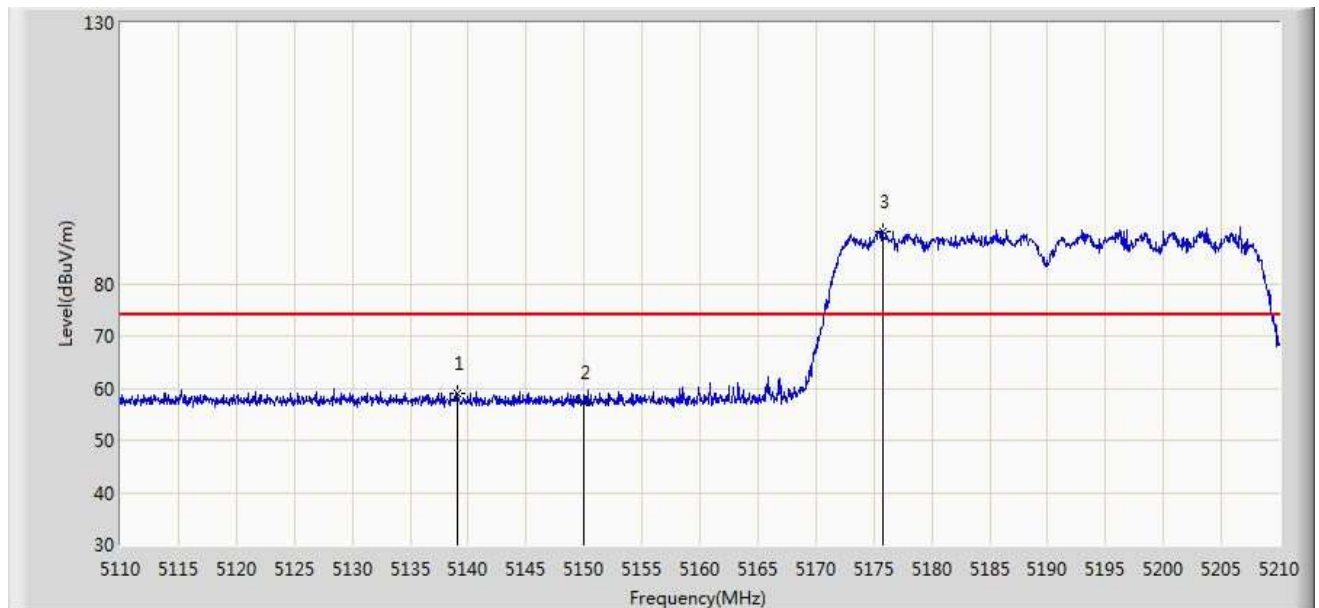


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5139.050	59.049	55.182	-14.951	74.000	3.867	PK
2			5150.000	57.289	53.413	-16.711	74.000	3.876	PK
3		*	5175.800	90.095	86.197	N/A	N/A	3.898	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2019/06/28 - 00:38
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D	Polarity: Horizontal
EUT: Aruba 500 接入點	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at channel 5190MHz Ant 0 + 1	

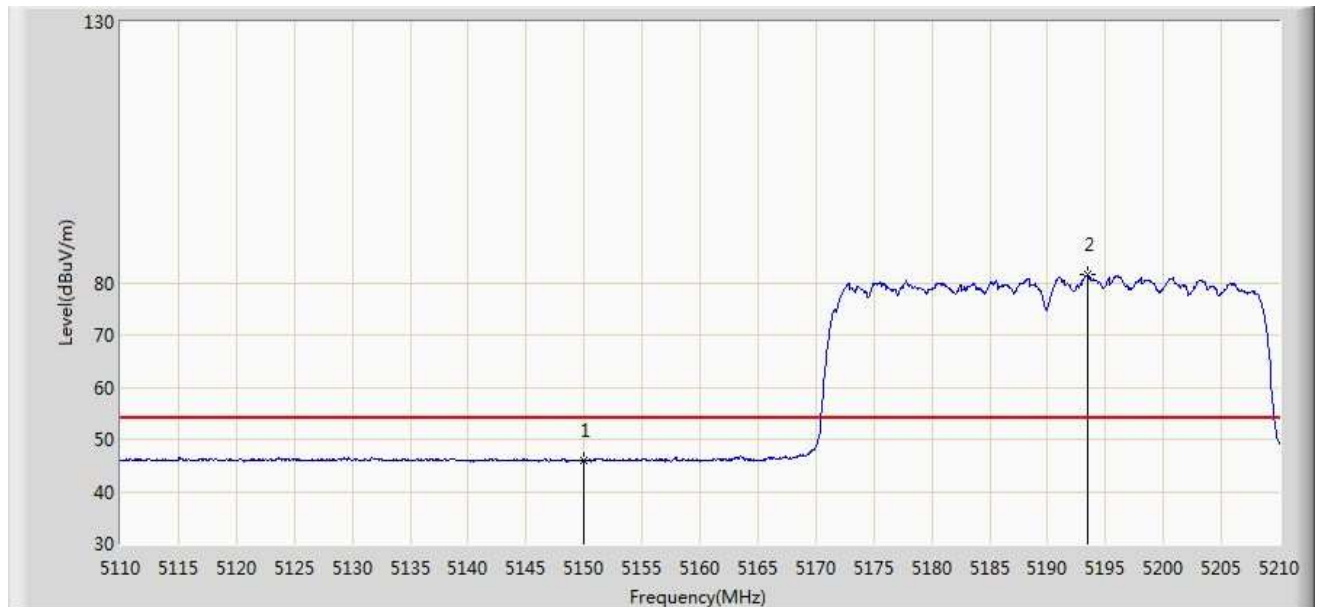

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	45.921	42.045	-8.079	54.000	3.876	AV
2		*	5193.400	81.460	77.547	N/A	N/A	3.913	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2019/06/28 - 03:34
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D	Polarity: Horizontal
EUT: Aruba 500 接入點	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at channel 5180MHz Ant 0 + 1	




No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5146.315	60.794	56.921	-13.206	74.000	3.873	PK
2			5150.000	58.260	54.384	-15.740	74.000	3.876	PK
3		*	5182.585	92.463	88.559	N/A	N/A	3.904	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2019/06/28 - 03:35
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D	Polarity: Horizontal
EUT: Aruba 500 接入點	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at channel 5180MHz Ant 0 + 1	

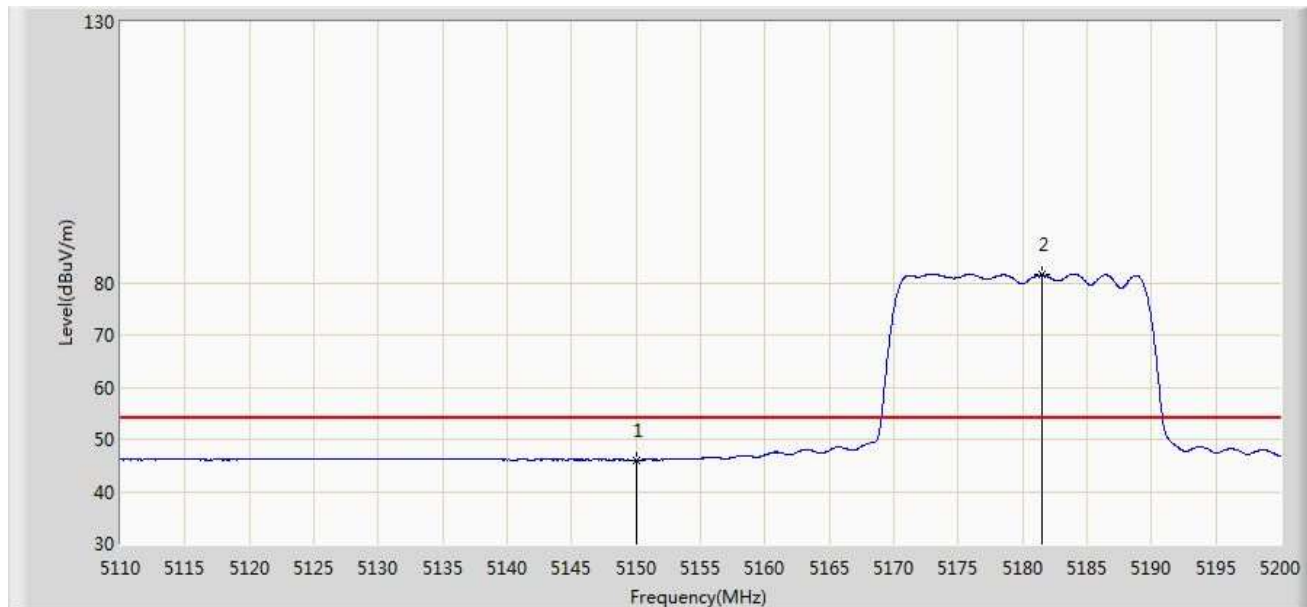


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	46.040	42.164	-7.960	54.000	3.876	AV
2		*	5181.460	81.455	77.552	N/A	N/A	3.903	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2019/06/28 - 03:32
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D	Polarity: Vertical
EUT: Aruba 500 接入點	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at channel 5180MHz Ant 0 + 1	

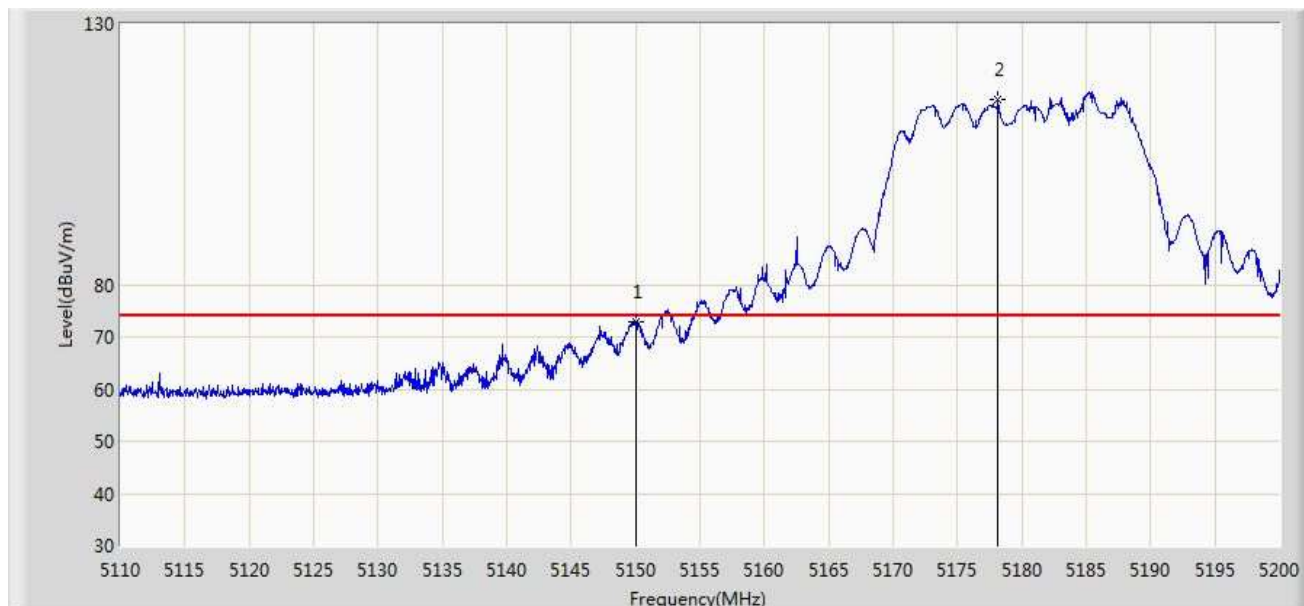


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	72.940	69.064	-1.060	74.000	3.876	PK
2		*	5178.175	115.411	111.511	N/A	N/A	3.900	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2019/06/28 - 03:33
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D	Polarity: Vertical
EUT: Aruba 500 接入點	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at channel 5180MHz Ant 0 + 1	

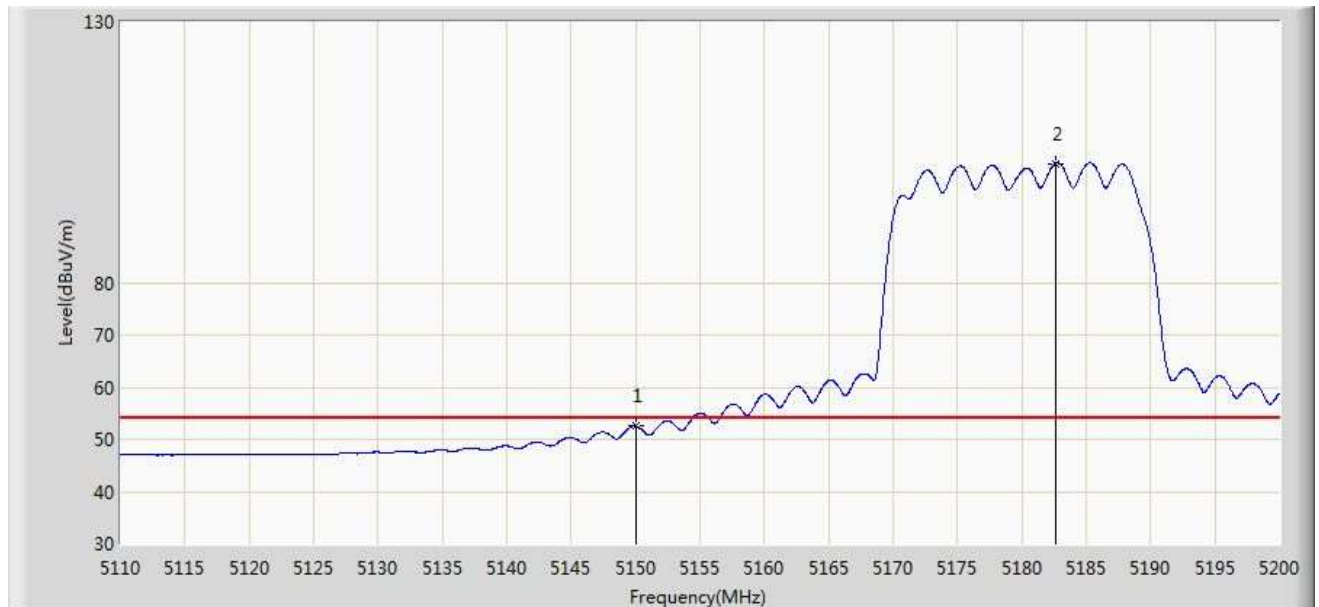

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	52.485	48.609	-1.515	54.000	3.876	AV
2		*	5182.585	102.872	98.968	N/A	N/A	3.904	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2019/06/28 - 03:39
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D	Polarity: Horizontal
EUT: Aruba 500 接入點	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at channel 5320MHz Ant 0 + 1	




No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5318.280	99.160	95.143	N/A	N/A	4.017	PK
2			5350.000	58.471	54.427	-15.529	74.000	4.044	PK
3			5354.560	60.690	56.642	-13.310	74.000	4.048	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2019/06/28 - 03:41
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D	Polarity: Horizontal
EUT: Aruba 500 接入點	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at channel 5320MHz Ant 0 + 1	

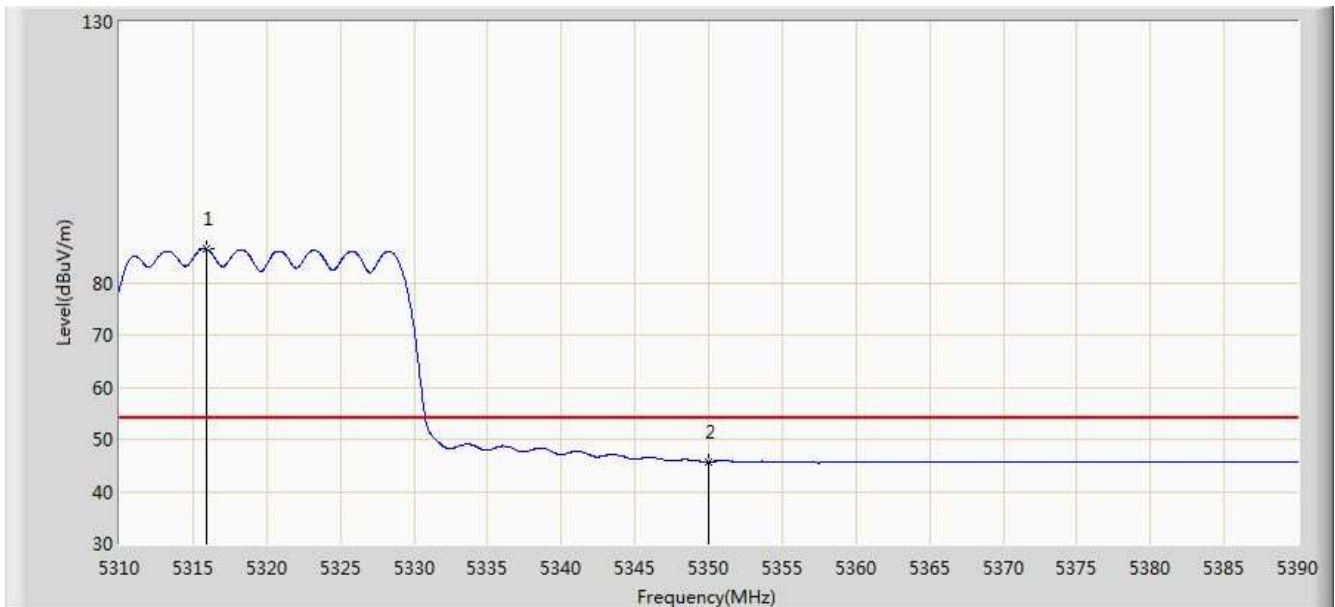


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5315.920	86.419	82.404	N/A	N/A	4.015	AV
2			5350.000	45.708	41.664	-8.292	54.000	4.044	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2019/06/28 - 03:36
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D	Polarity: Vertical
EUT: Aruba 500 接入點	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at channel 5320MHz Ant 0 + 1	

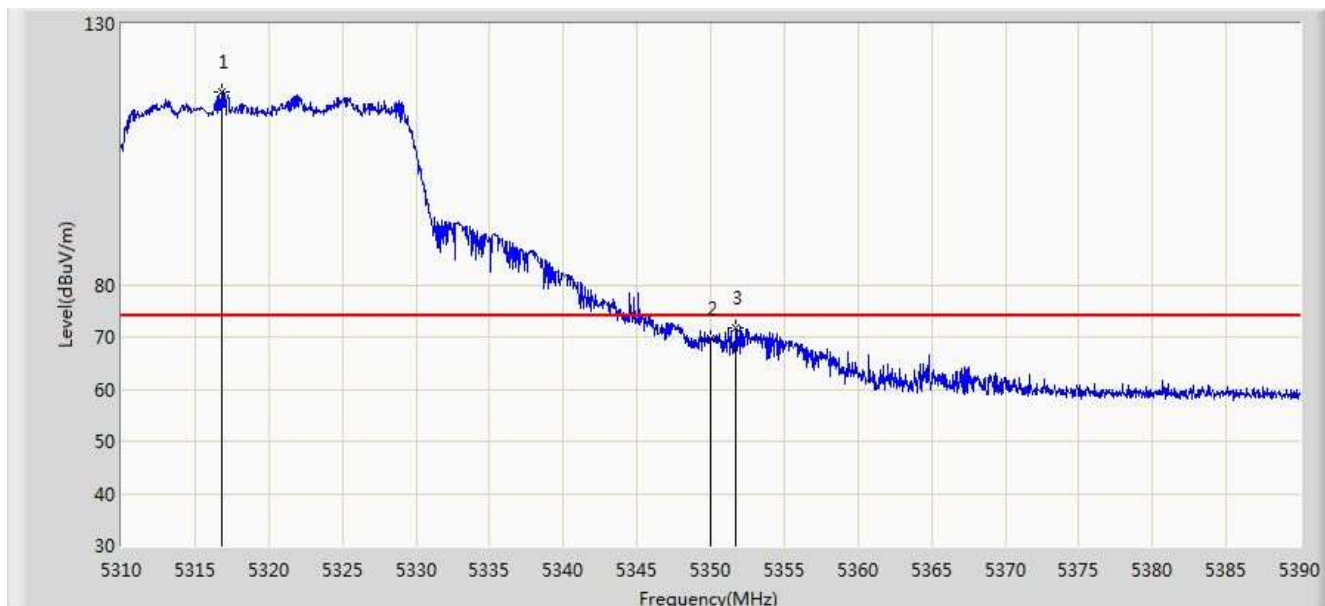


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5316.800	116.812	112.796	N/A	N/A	4.016	PK
2			5350.000	69.767	65.723	-4.233	74.000	4.044	PK
3			5351.720	71.845	67.799	-2.155	74.000	4.046	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2019/06/28 - 03:38
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D	Polarity: Vertical
EUT: Aruba 500 接入點	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at channel 5320MHz Ant 0 + 1	

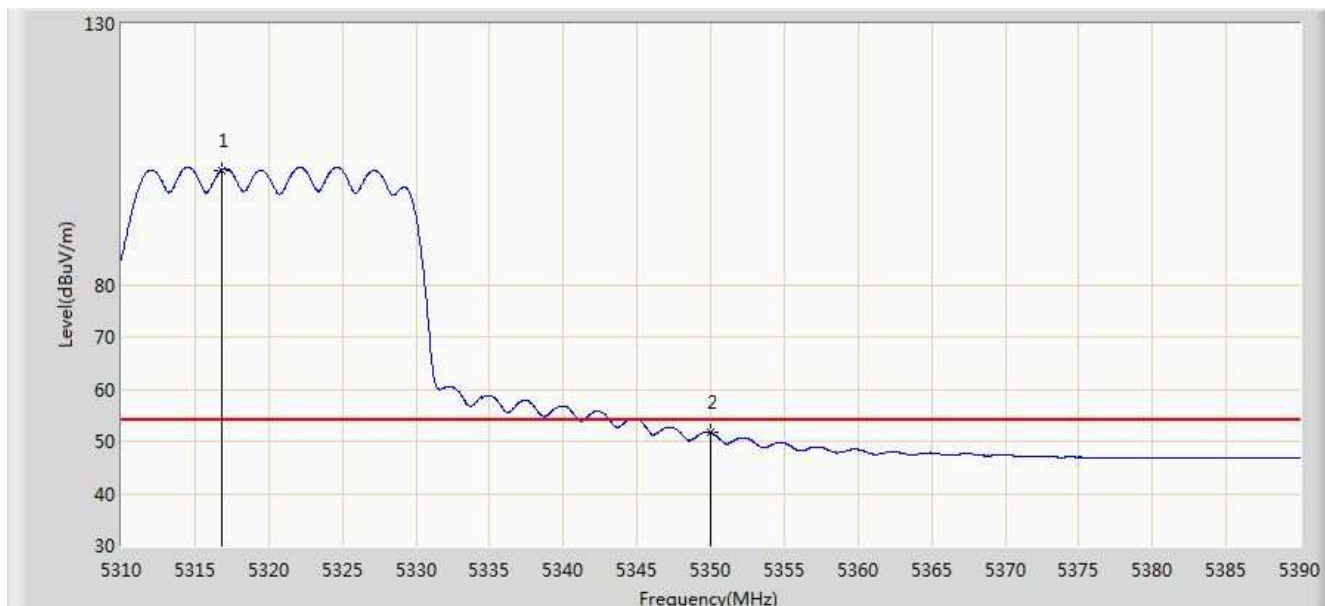


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5316.800	101.971	97.955	N/A	N/A	4.016	AV
2			5350.000	51.674	47.630	-2.326	54.000	4.044	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2019/06/28 - 03:51
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D	Polarity: Horizontal
EUT: Aruba 500 接入點	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at channel 5500MHz Ant 0 + 1	

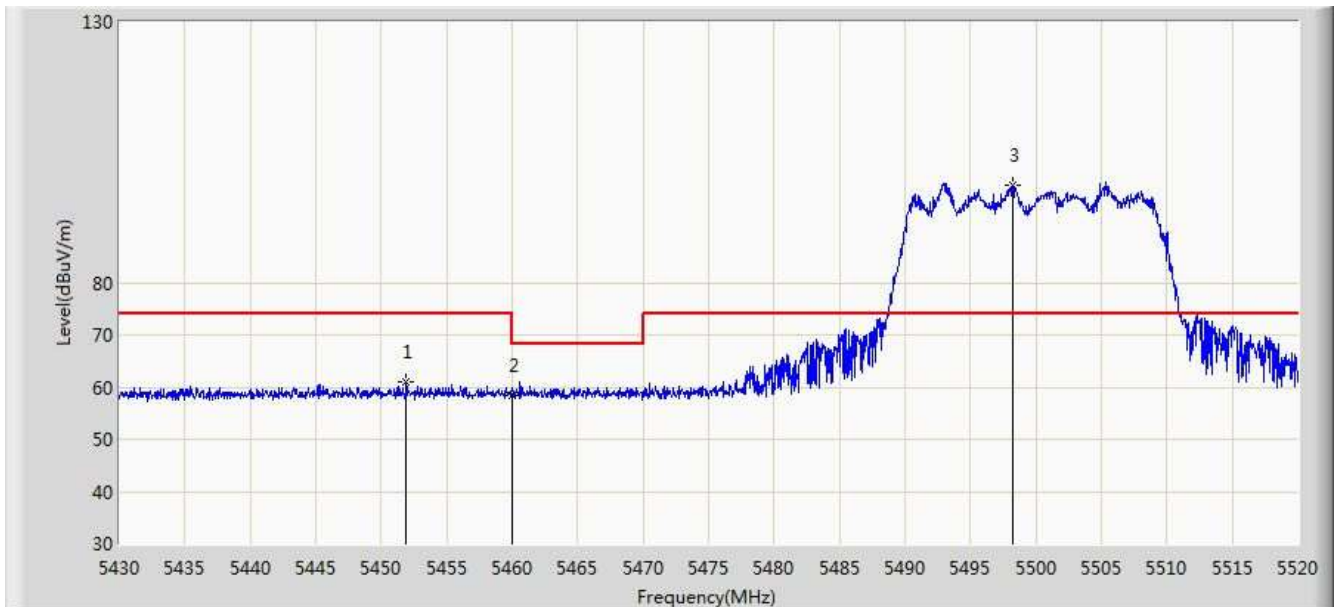

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5451.915	61.116	56.987	-12.884	74.000	4.129	PK
2			5460.000	58.485	54.349	-15.515	74.000	4.136	PK
3		*	5498.265	98.663	94.485	N/A	N/A	4.178	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2019/06/28 - 03:52
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D	Polarity: Horizontal
EUT: Aruba 500 接入點	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at channel 5500MHz Ant 0 + 1	




No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	46.252	42.116	-7.748	54.000	4.136	AV
2		*	5498.265	85.562	81.384	N/A	N/A	4.178	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2019/06/28 - 03:47
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D	Polarity: Vertical
EUT: Aruba 500 接入點	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at channel 5500MHz Ant 0 + 1	

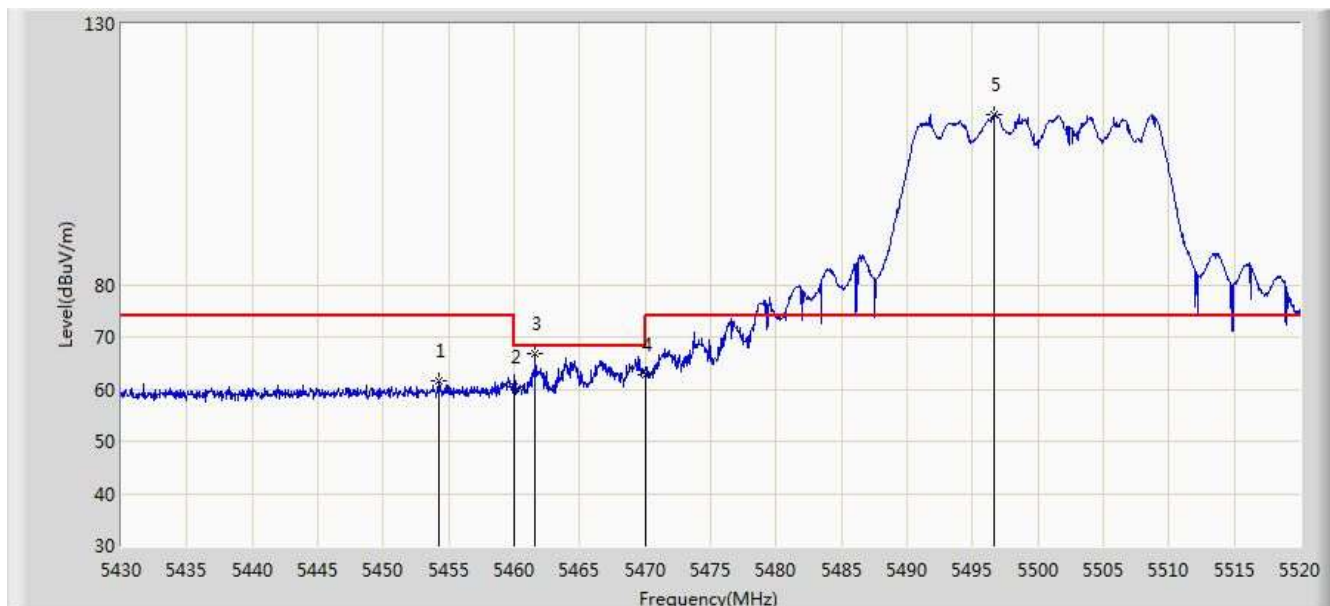


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5454.210	61.642	57.511	-12.358	74.000	4.131	PK
2			5460.000	60.468	56.332	-13.532	74.000	4.136	PK
3			5461.635	66.726	62.589	-1.474	68.200	4.137	PK
4			5470.000	62.860	58.716	-5.340	68.200	4.144	PK
5		*	5496.645	112.471	108.296	N/A	N/A	4.176	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2019/06/28 - 03:49
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D	Polarity: Vertical
EUT: Aruba 500 接入點	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at channel 5500MHz Ant 0 + 1	

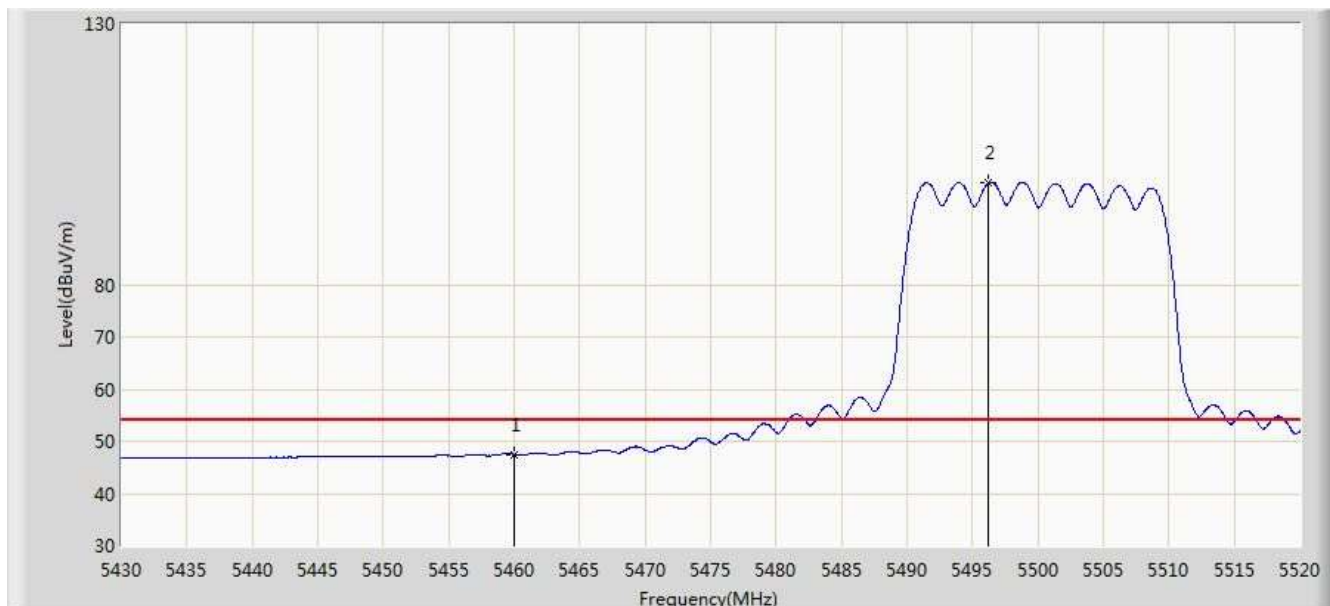


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	47.471	43.335	-6.529	54.000	4.136	AV
2		*	5496.240	99.445	95.271	N/A	N/A	4.174	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2019/06/28 - 03:53
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D	Polarity: Vertical
EUT: Aruba 500 接入點	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at channel 5700MHz Ant 0 + 1	

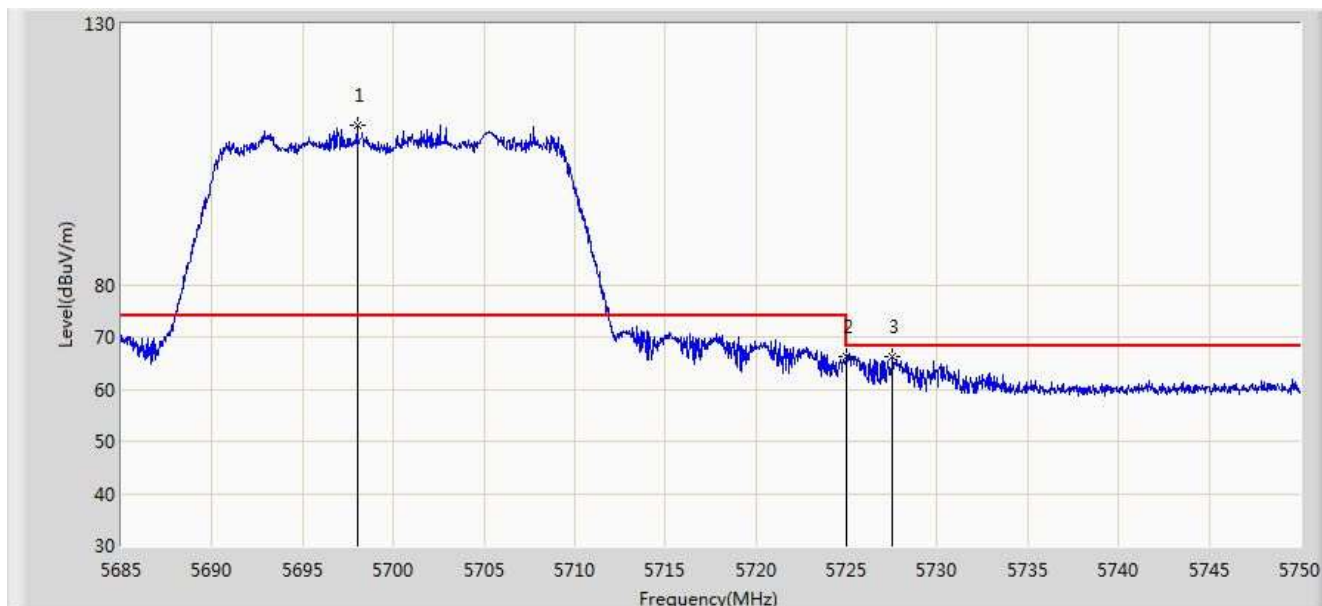


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5698.000	110.539	105.609	N/A	N/A	4.930	PK
2			5725.000	66.265	61.231	-1.935	68.200	5.034	PK
3			5727.542	66.308	61.264	-1.892	68.200	5.044	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2019/06/28 - 03:55
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D	Polarity: Horizontal
EUT: Aruba 500 接入點	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at channel 5700MHz Ant 0 + 1	

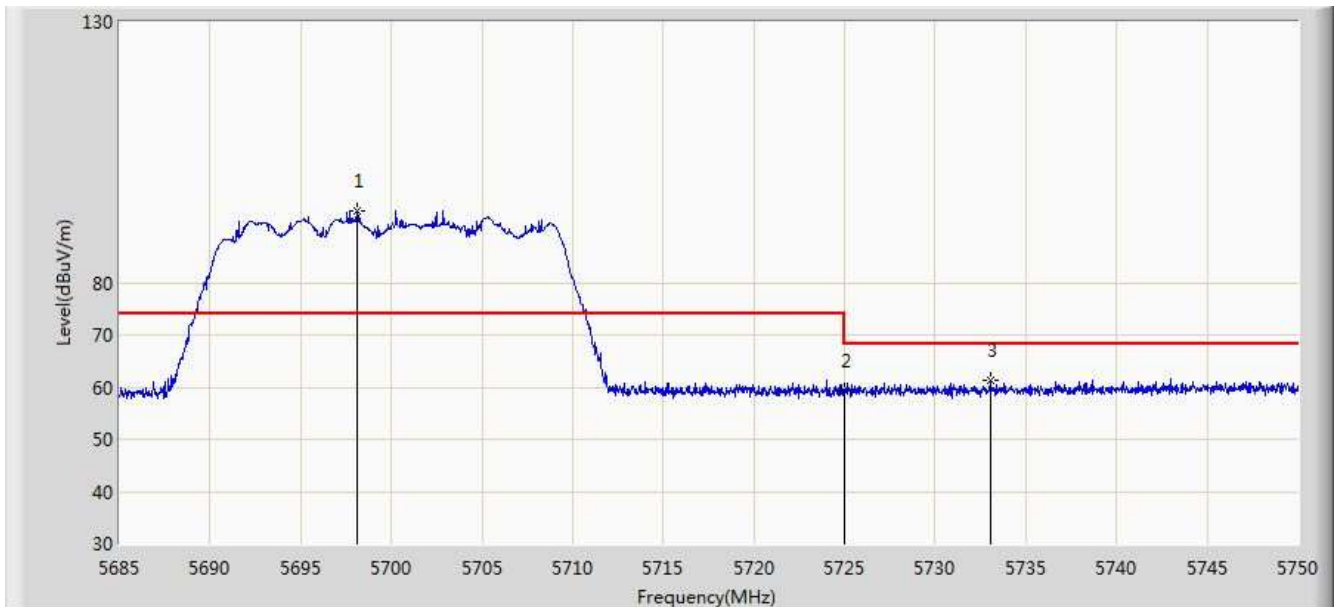


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5698.098	93.646	88.715	N/A	N/A	4.931	PK
2			5725.000	59.196	54.162	-9.004	68.200	5.034	PK
3			5733.035	61.222	56.157	-6.978	68.200	5.065	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2019/06/28 - 03:57
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D	Polarity: Horizontal
EUT: Aruba 500 接入點	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at channel 5745MHz Ant 0 + 1	

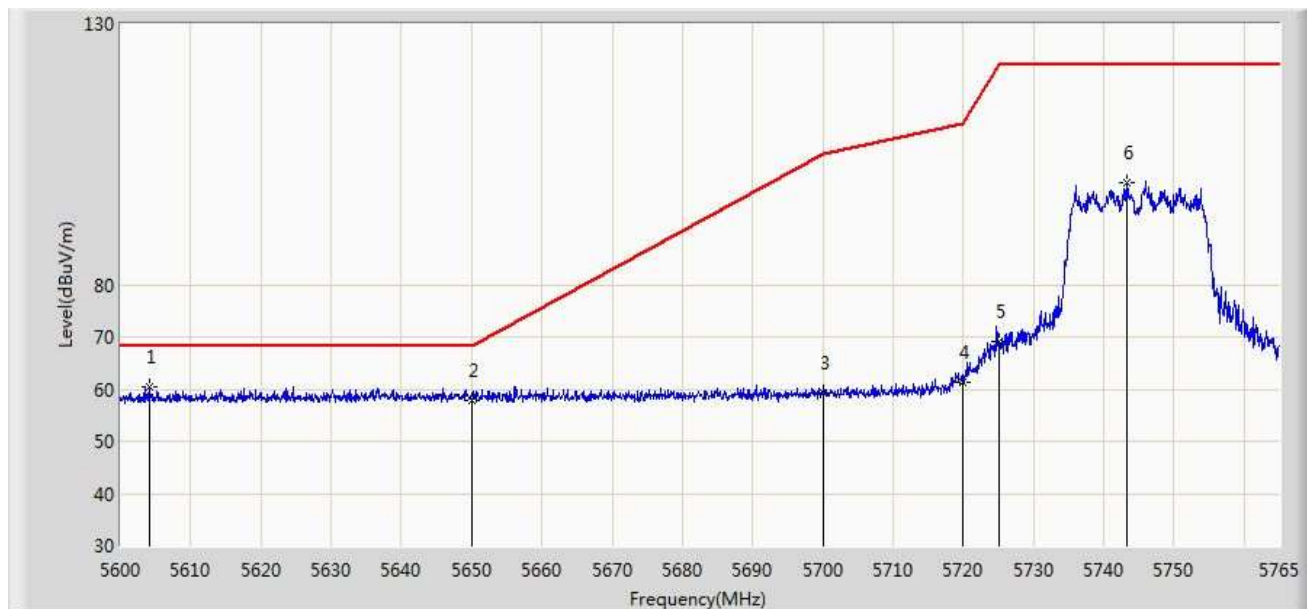


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5604.042	60.295	55.726	-7.905	68.200	4.570	PK
2			5650.000	57.946	53.200	-10.254	68.200	4.746	PK
3			5700.000	59.355	54.417	-45.845	105.200	4.938	PK
4			5720.000	61.362	56.347	-49.438	110.800	5.015	PK
5			5725.000	69.161	64.127	-53.039	122.200	5.034	PK
6			5743.303	99.494	94.390	N/A	N/A	5.104	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2019/06/28 - 03:58
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D	Polarity: Vertical
EUT: Aruba 500 接入點	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at channel 5745MHz Ant 0 + 1	

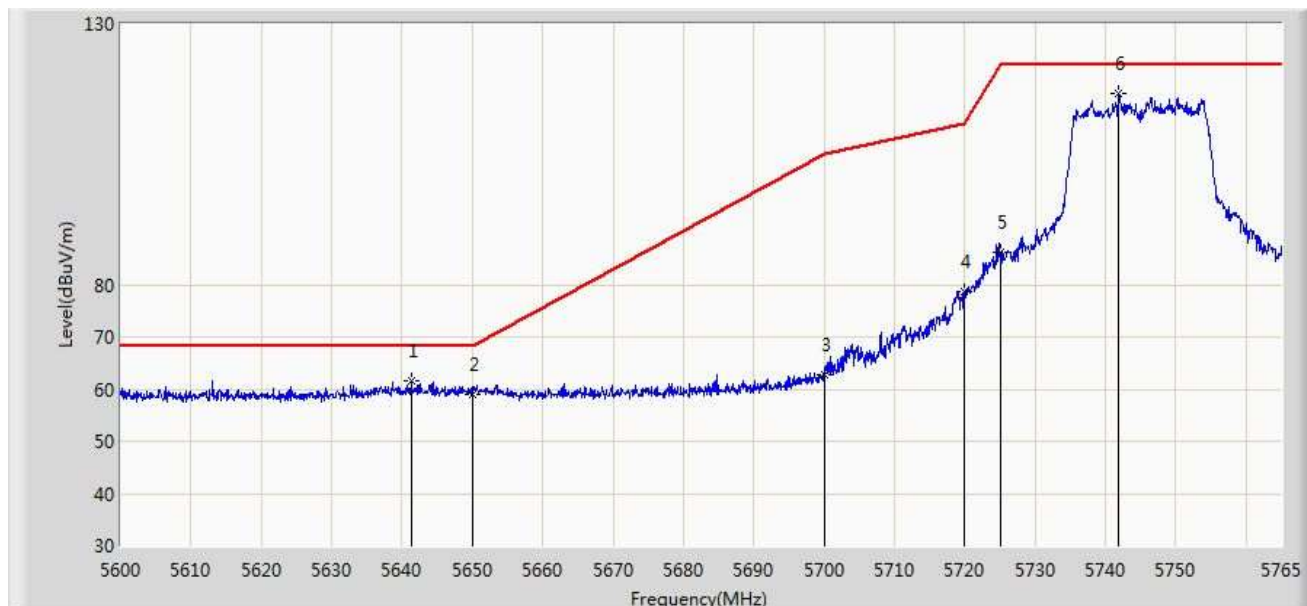


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5641.250	61.450	56.737	-6.750	68.200	4.712	PK
2			5650.000	58.869	54.123	-9.331	68.200	4.746	PK
3			5700.000	62.872	57.934	-42.328	105.200	4.938	PK
4			5720.000	78.723	73.708	-32.077	110.800	5.015	PK
5			5725.000	86.118	81.084	-36.082	122.200	5.034	PK
6		*	5741.900	116.706	111.607	N/A	N/A	5.099	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2019/06/28 - 04:00
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D	Polarity: Horizontal
EUT: Aruba 500 接入點	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at channel 5825MHz Ant 0 + 1	

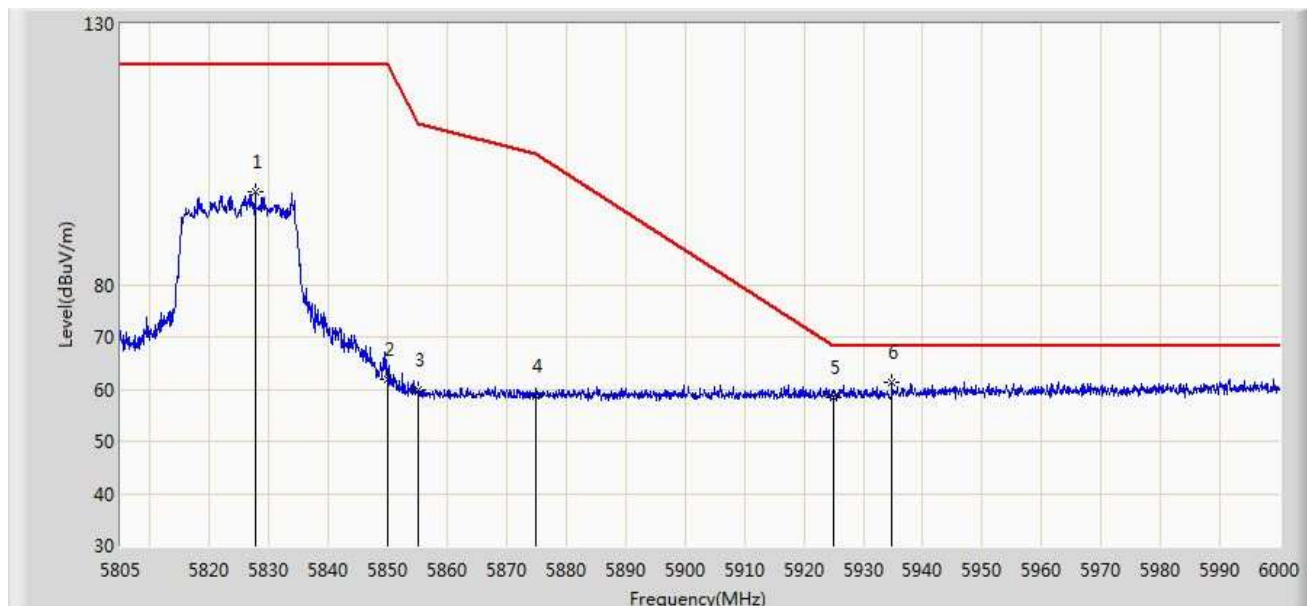


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5827.620	97.806	92.378	N/A	N/A	5.428	PK
2			5850.000	61.747	56.233	-60.453	122.200	5.514	PK
3			5855.000	59.881	54.348	-50.919	110.800	5.533	PK
4			5875.000	58.578	52.968	-46.622	105.200	5.610	PK
5			5925.000	58.459	52.657	-9.741	68.200	5.802	PK
6		*	5934.772	61.168	55.328	-7.032	68.200	5.840	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2019/06/28 - 04:02
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D	Polarity: Vertical
EUT: Aruba 500 接入點	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at channel 5825MHz Ant 0 + 1	

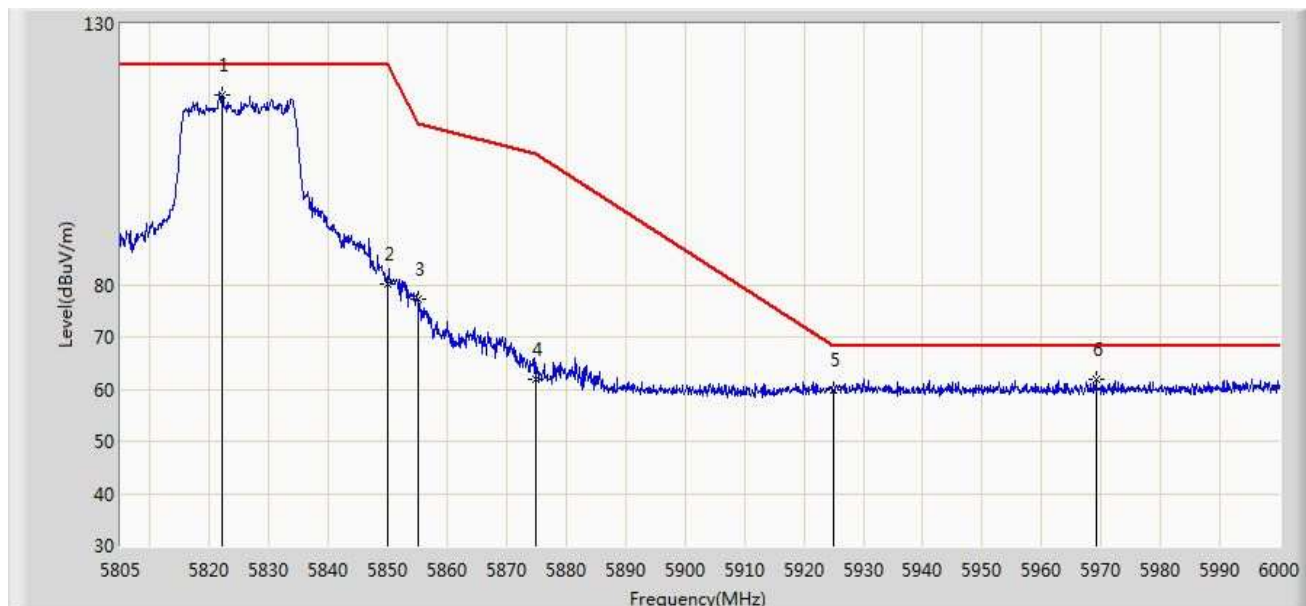


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5822.062	116.491	111.084	N/A	N/A	5.408	PK
2			5850.000	80.277	74.763	-41.923	122.200	5.514	PK
3			5855.000	77.200	71.667	-33.600	110.800	5.533	PK
4			5875.000	61.925	56.315	-43.275	105.200	5.610	PK
5			5925.000	59.746	53.944	-8.454	68.200	5.802	PK
6			5969.092	61.941	55.969	-6.259	68.200	5.971	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2019/07/02 - 04:10
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D	Polarity: Horizontal
EUT: Aruba 500 接入點	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at channel 5190MHz Ant 0 + 1	

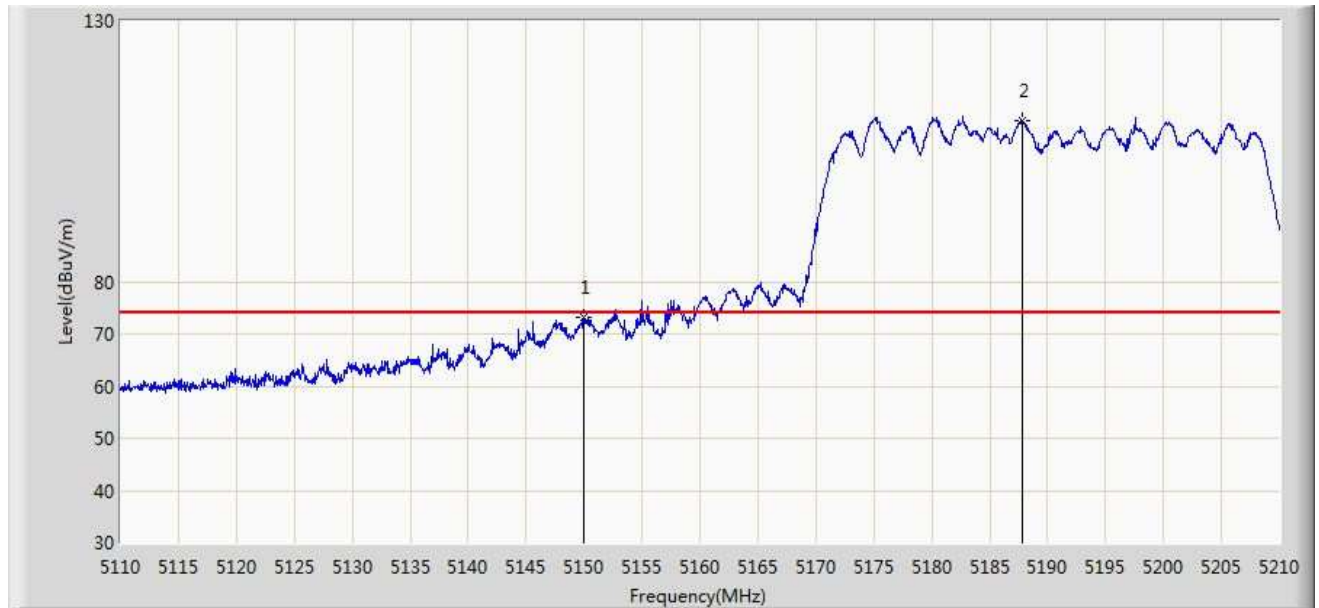


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	73.117	69.241	-0.883	74.000	3.876	PK
2		*	5187.850	110.900	106.992	N/A	N/A	3.908	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2019/07/02 - 04:13
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D	Polarity: Horizontal
EUT: Aruba 500 接入點	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at channel 5190MHz Ant 0 + 1	

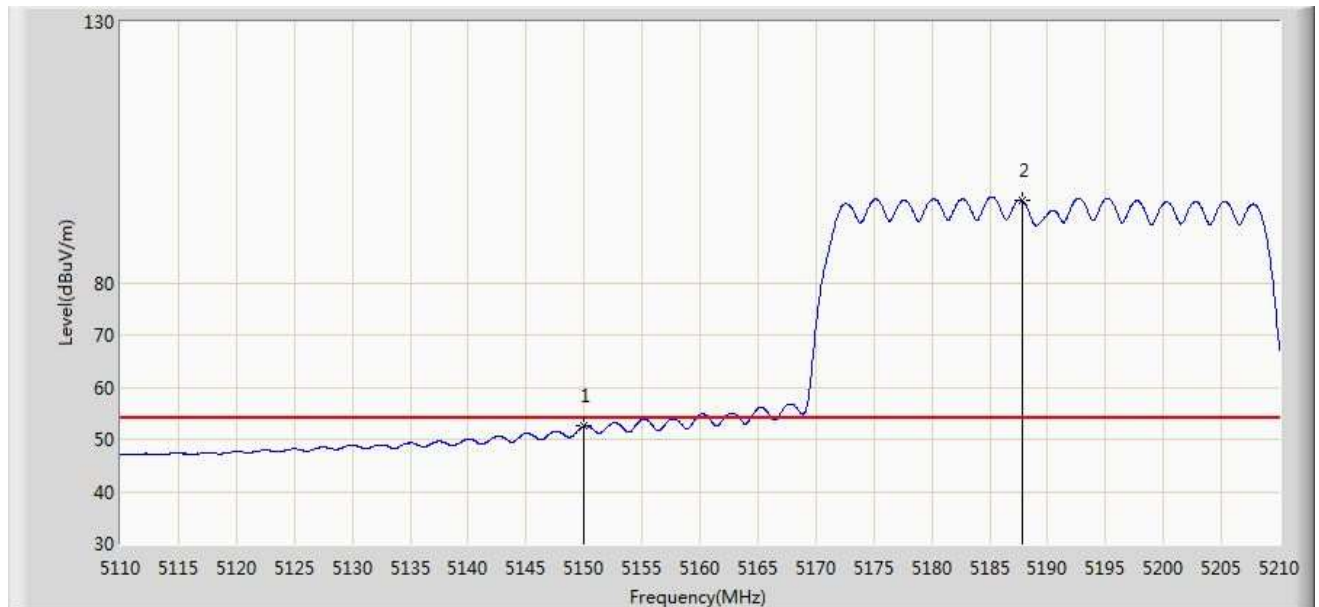


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	52.497	48.621	-1.503	54.000	3.876	AV
2		*	5187.850	95.737	91.829	N/A	N/A	3.908	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2019/07/02 - 04:14
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D	Polarity: Vertical
EUT: Aruba 500 接入點	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at channel 5190MHz Ant 0 + 1	

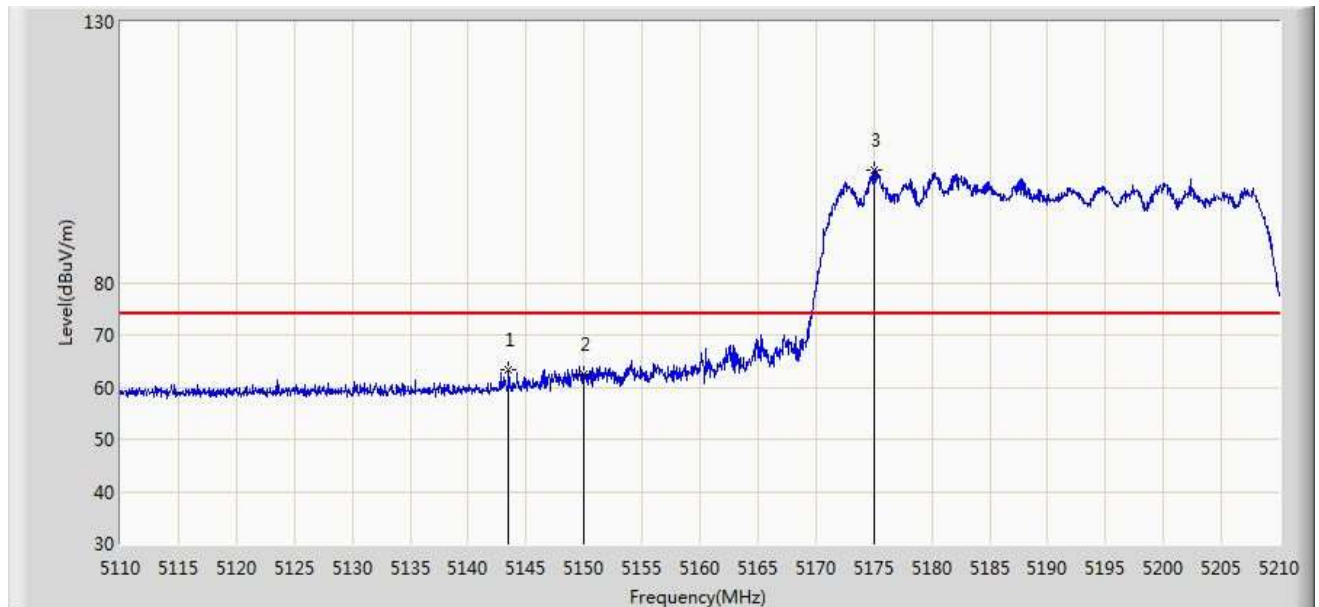


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5143.500	63.439	59.569	-10.561	74.000	3.870	PK
2			5150.000	62.355	58.479	-11.645	74.000	3.876	PK
3		*	5175.050	101.473	97.576	N/A	N/A	3.897	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2019/07/02 - 04:16
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D	Polarity: Vertical
EUT: Aruba 500 接入點	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at channel 5190MHz Ant 0 + 1	

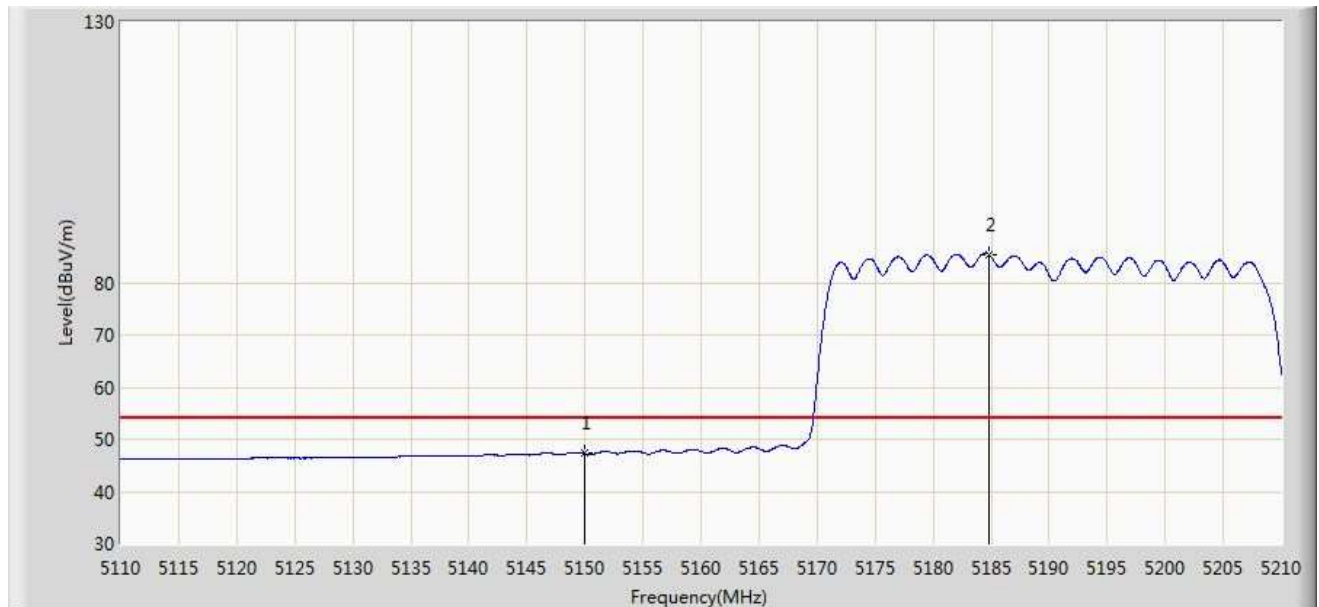

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	47.252	43.376	-6.748	54.000	3.876	AV
2		*	5184.750	85.448	81.542	N/A	N/A	3.906	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2019/07/02 - 04:24
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D	Polarity: Horizontal
EUT: Aruba 500 接入點	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at channel 5310MHz Ant 0 + 1	




No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5302.650	112.438	108.434	N/A	N/A	4.004	PK
2			5350.000	72.442	68.398	-1.558	74.000	4.044	PK
3			5350.500	73.409	69.364	-0.591	74.000	4.045	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2019/07/02 - 04:25
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D	Polarity: Horizontal
EUT: Aruba 500 接入點	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at channel 5310MHz Ant 0 + 1	

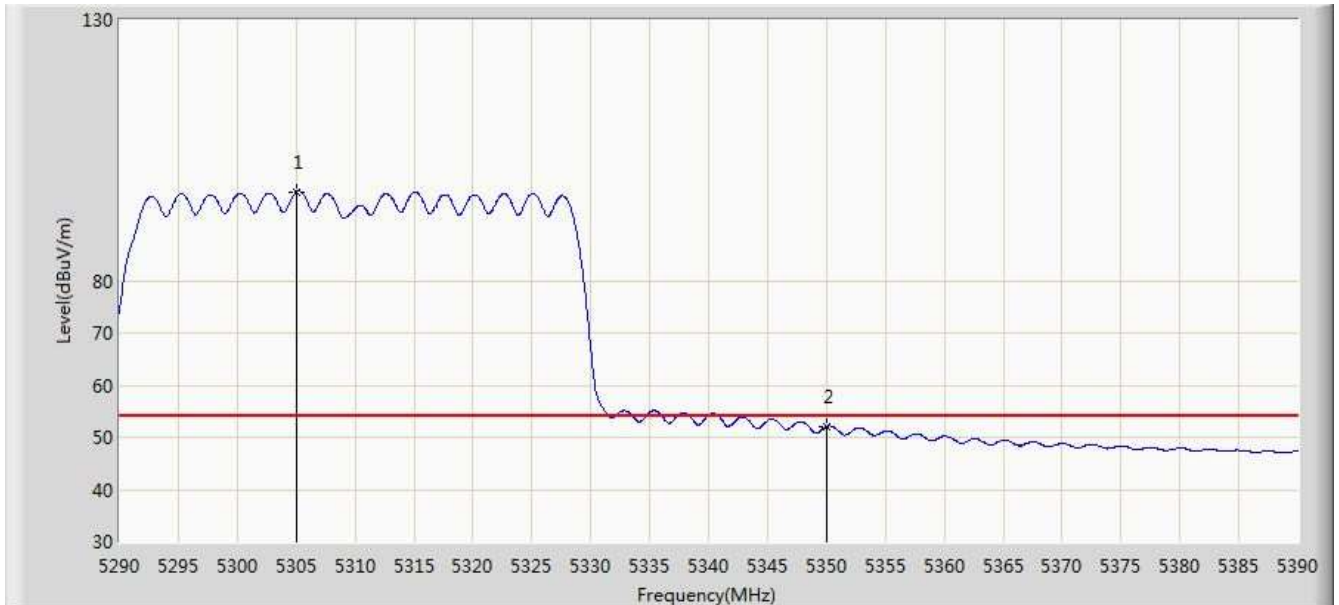


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5305.000	97.029	93.023	N/A	N/A	4.006	AV
2			5350.000	52.070	48.026	-1.930	54.000	4.044	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2019/07/02 - 04:26
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D	Polarity: Vertical
EUT: Aruba 500 接入點	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at channel 5310MHz Ant 0 + 1	

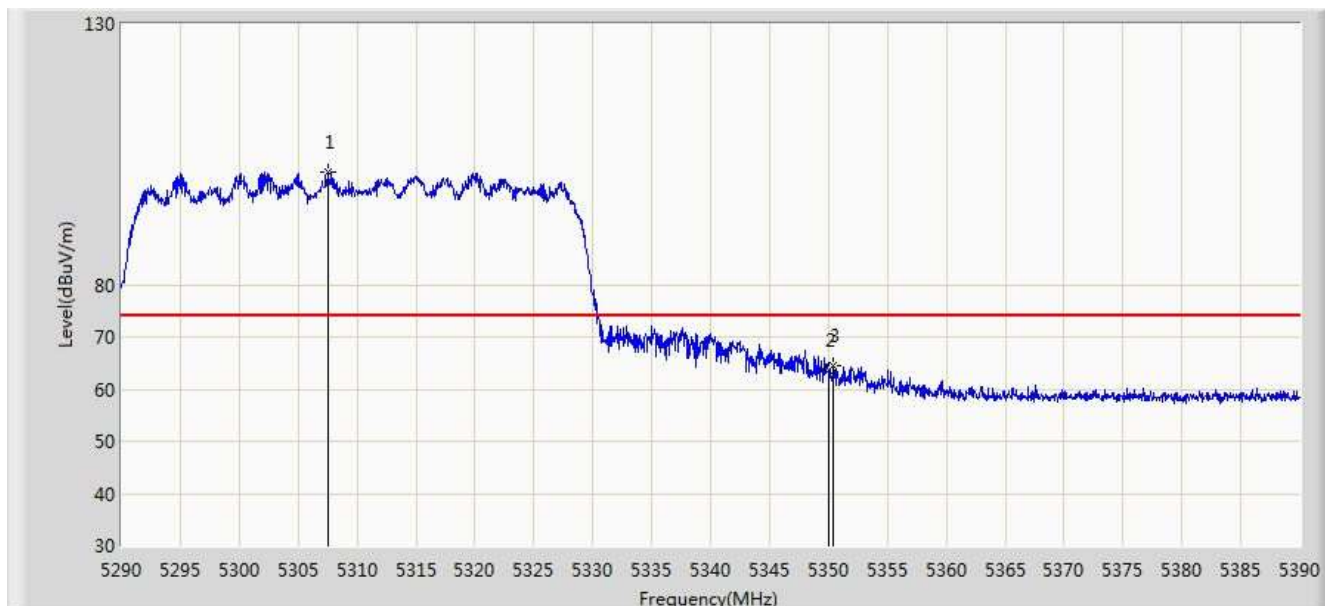


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5307.500	101.536	97.528	N/A	N/A	4.008	PK
2			5350.000	63.704	59.660	-10.296	74.000	4.044	PK
3			5350.450	64.584	60.539	-9.416	74.000	4.045	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2019/07/02 - 04:29
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D	Polarity: Vertical
EUT: Aruba 500 接入點	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at channel 5310MHz Ant 0 + 1	

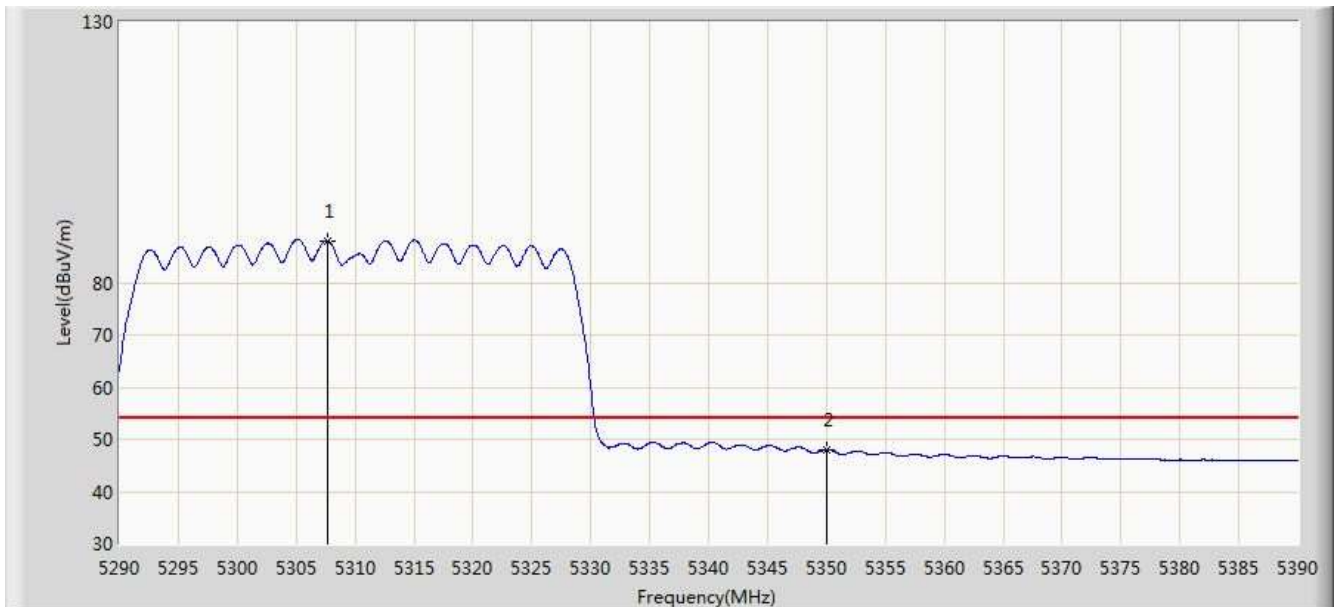


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5307.700	88.020	84.012	N/A	N/A	4.008	AV
2			5350.000	47.980	43.936	-6.020	54.000	4.044	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2019/07/02 - 04:35
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D	Polarity: Horizontal
EUT: Aruba 500 接入點	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at channel 5610MHz Ant 0 + 1	

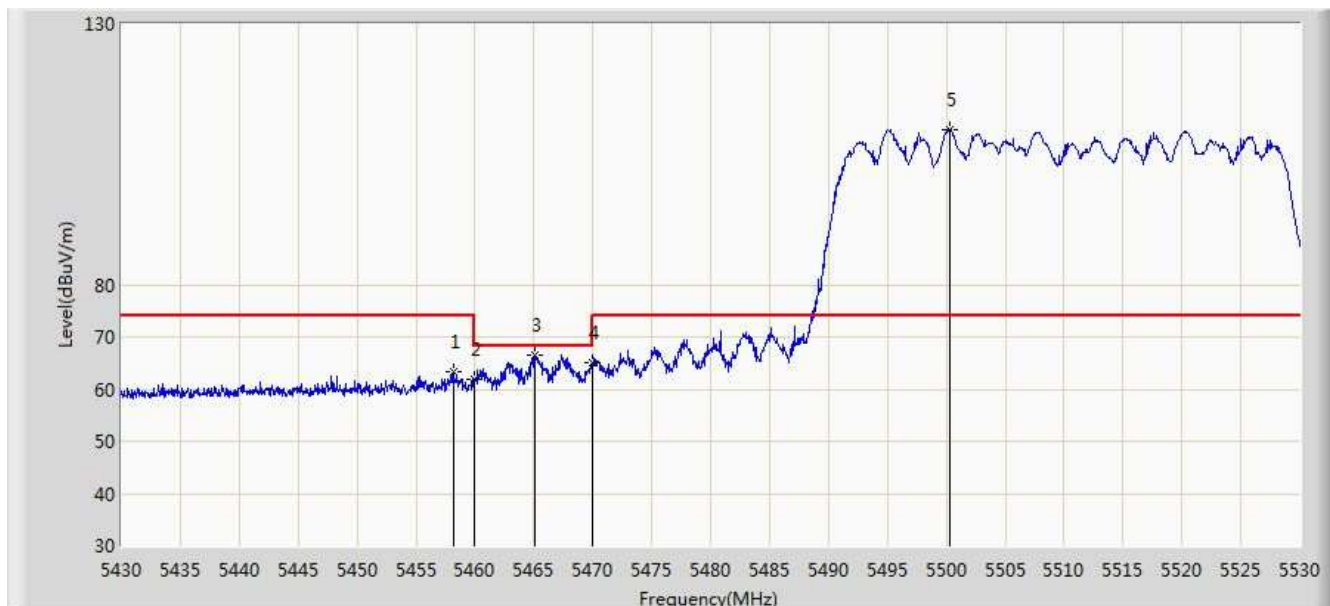


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5458.150	63.238	59.104	-10.762	74.000	4.134	PK
2			5460.000	61.787	57.651	-12.213	74.000	4.136	PK
3			5465.100	66.482	62.342	-1.718	68.200	4.140	PK
4			5470.000	65.182	61.038	-3.018	68.200	4.144	PK
5		*	5500.250	109.781	105.600	N/A	N/A	4.182	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2019/07/02 - 04:37
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D	Polarity: Horizontal
EUT: Aruba 500 接入點	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at channel 5610MHz Ant 0 + 1	

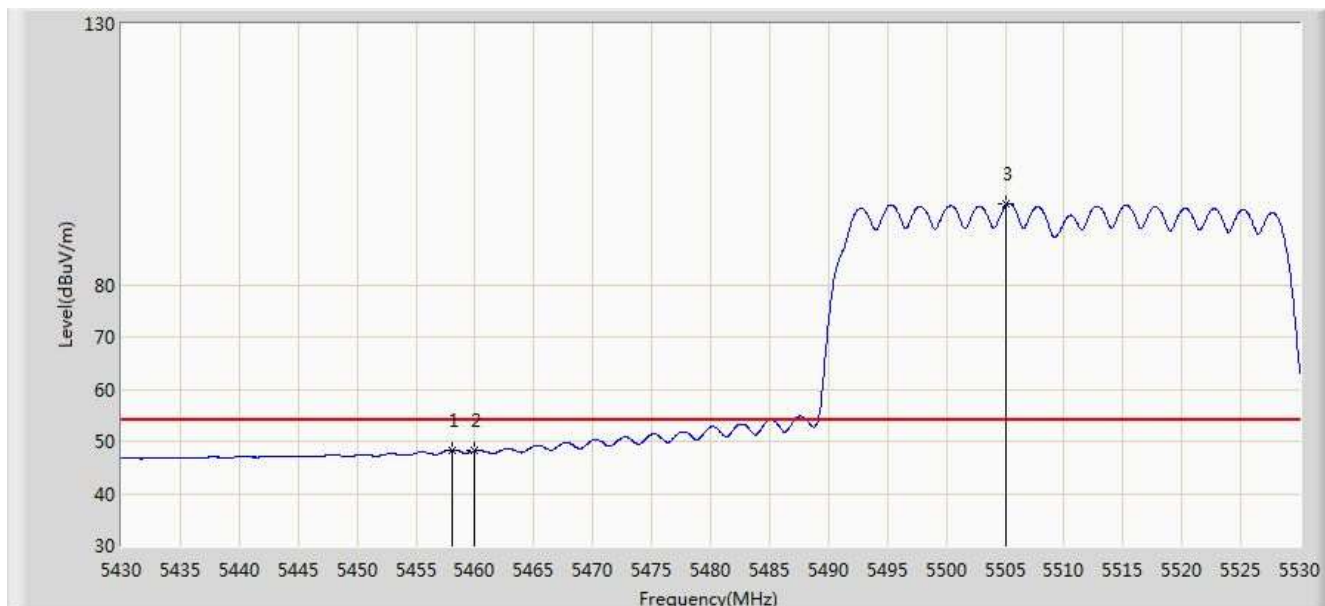


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5458.100	48.354	44.220	-5.646	54.000	4.134	AV
2			5460.000	48.164	44.028	-5.836	54.000	4.136	AV
3		*	5505.100	95.375	91.185	N/A	N/A	4.190	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2019/07/02 - 04:39
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D	Polarity: Vertical
EUT: Aruba 500 接入點	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at channel 5610MHz Ant 0 + 1	

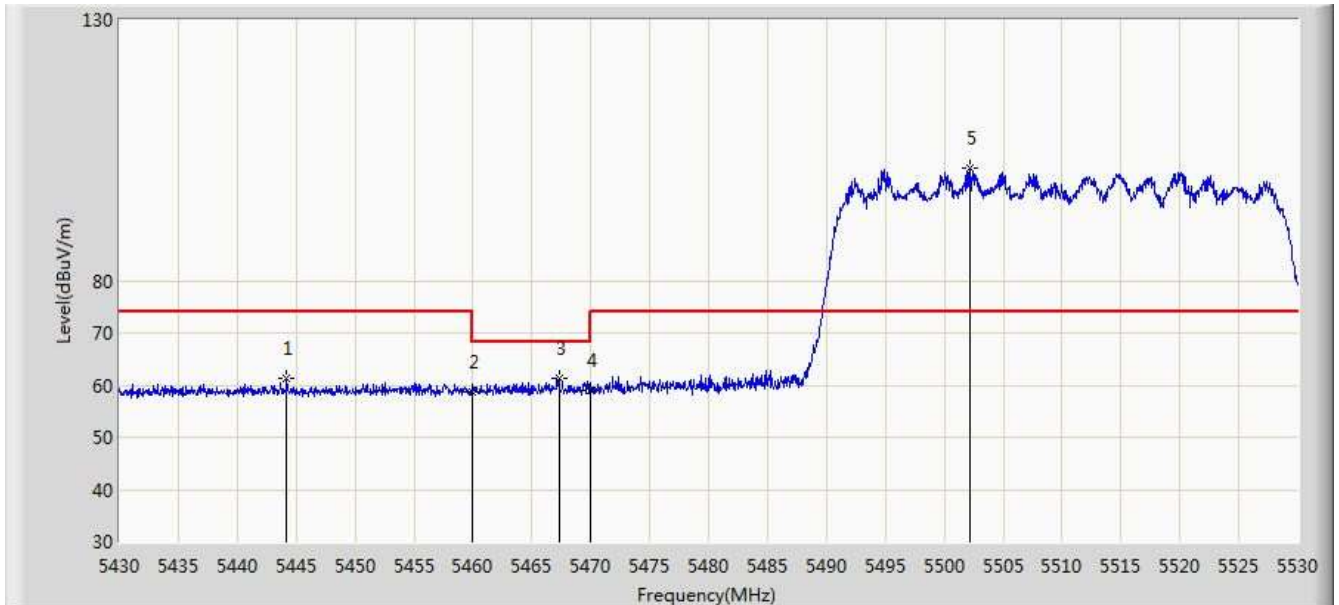


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5444.200	61.235	57.112	-12.765	74.000	4.123	PK
2			5460.000	58.649	54.513	-15.351	74.000	4.136	PK
3			5467.300	61.322	57.180	-6.878	68.200	4.142	PK
4			5470.000	59.060	54.916	-9.140	68.200	4.144	PK
5		*	5502.150	101.534	97.349	N/A	N/A	4.185	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2019/07/02 - 04:40
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D	Polarity: Vertical
EUT: Aruba 500 接入點	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at channel 5610MHz Ant 0 + 1	

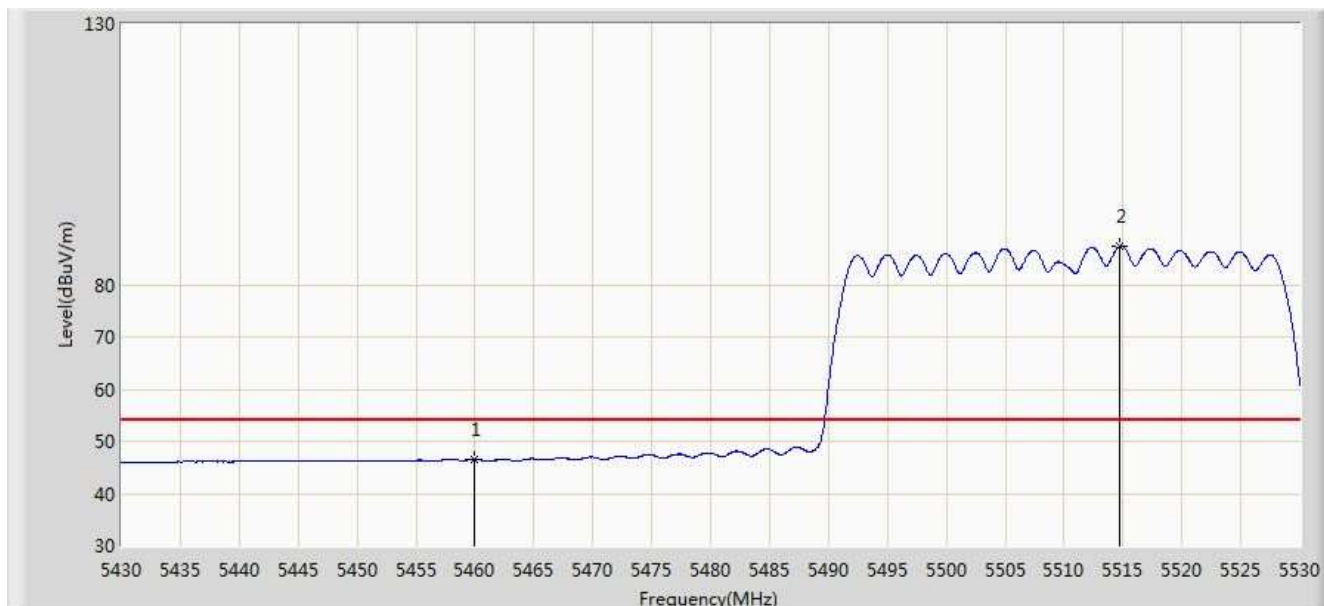


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	46.460	42.324	-7.540	54.000	4.136	AV
2		*	5514.650	87.318	83.092	N/A	N/A	4.227	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2019/06/28 - 04:42
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D	Polarity: Horizontal
EUT: Aruba 500 接入點	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at channel 5670MHz Ant 0 + 1	

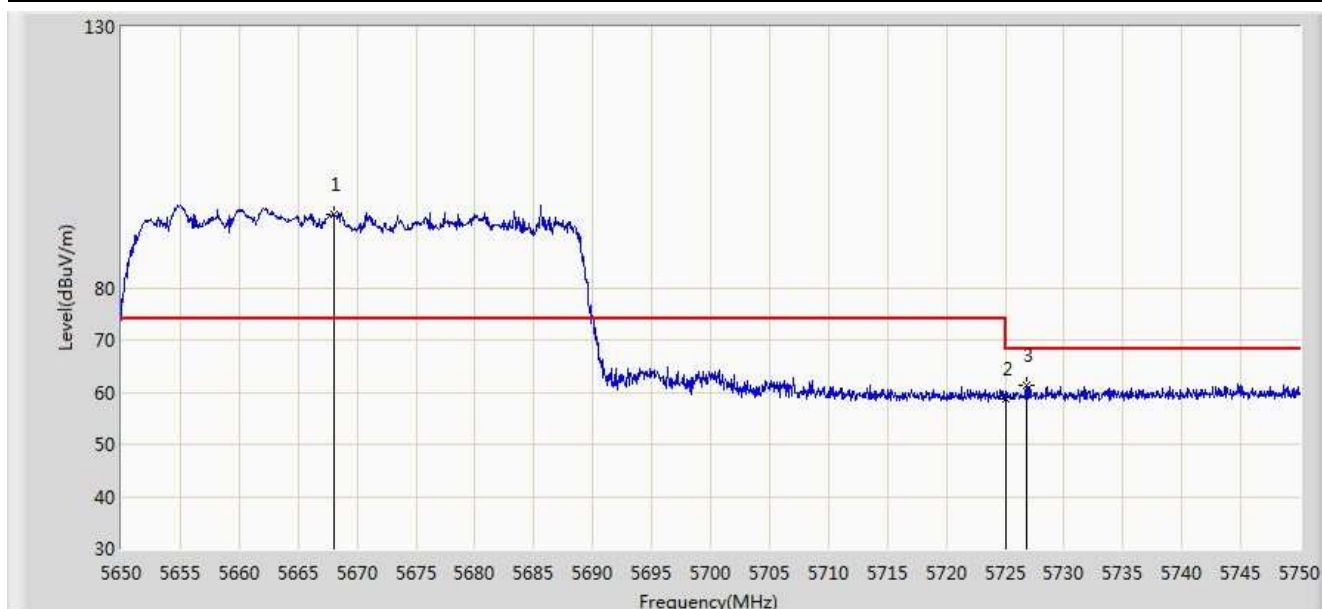

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5668.100	94.140	89.324	N/A	N/A	4.815	PK
2			5725.000	58.777	53.743	-9.423	68.200	5.034	PK
3			5726.850	61.220	56.179	-6.980	68.200	5.040	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2019/06/28 - 04:40
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D	Polarity: Vertical
EUT: Aruba 500 接入點	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at channel 5670MHz Ant 0 + 1	




No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5668.000	109.205	104.390	N/A	N/A	4.815	PK
2			5725.000	67.397	62.363	-0.803	68.200	5.034	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2019/06/28 - 04:44
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D	Polarity: Horizontal
EUT: Aruba 500 接入點	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at channel 5755MHz Ant 0 + 1	

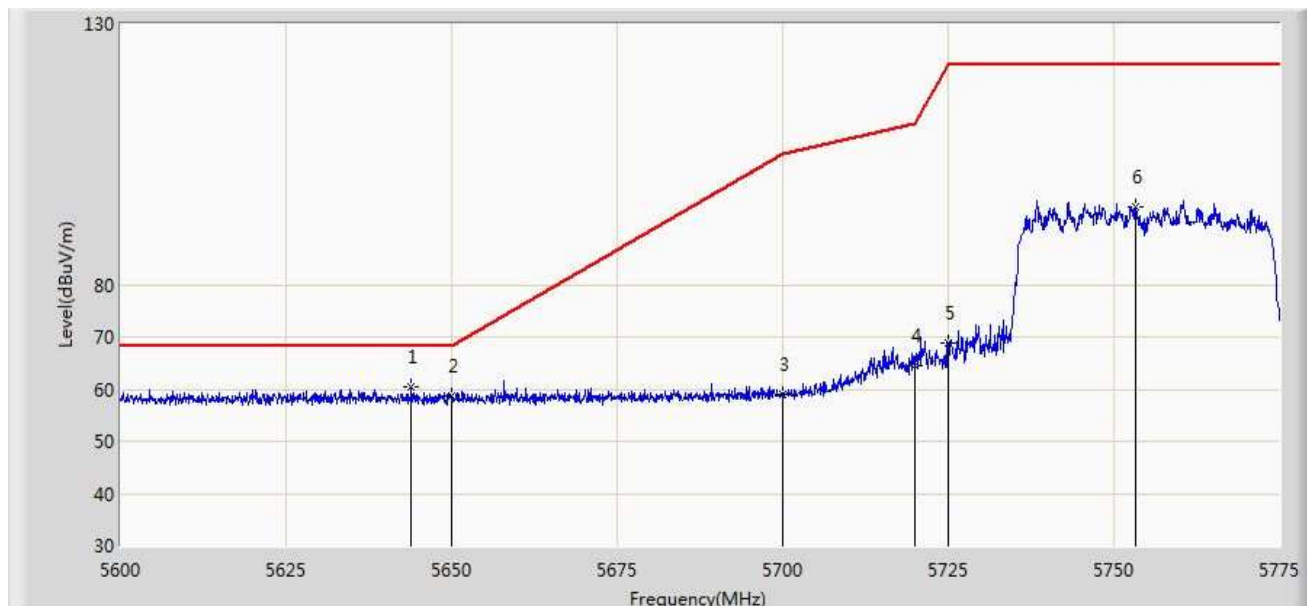


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5643.925	60.448	55.725	-7.752	68.200	4.723	PK
2			5650.000	58.560	53.814	-9.640	68.200	4.746	PK
3			5700.000	58.903	53.965	-46.297	105.200	4.938	PK
4			5720.000	64.587	59.572	-46.213	110.800	5.015	PK
5			5725.000	68.778	63.744	-53.422	122.200	5.034	PK
6			5753.388	95.012	89.869	N/A	N/A	5.142	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2019/06/28 - 04:45
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D	Polarity: Vertical
EUT: Aruba 500 接入點	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at channel 5755MHz Ant 0 + 1	

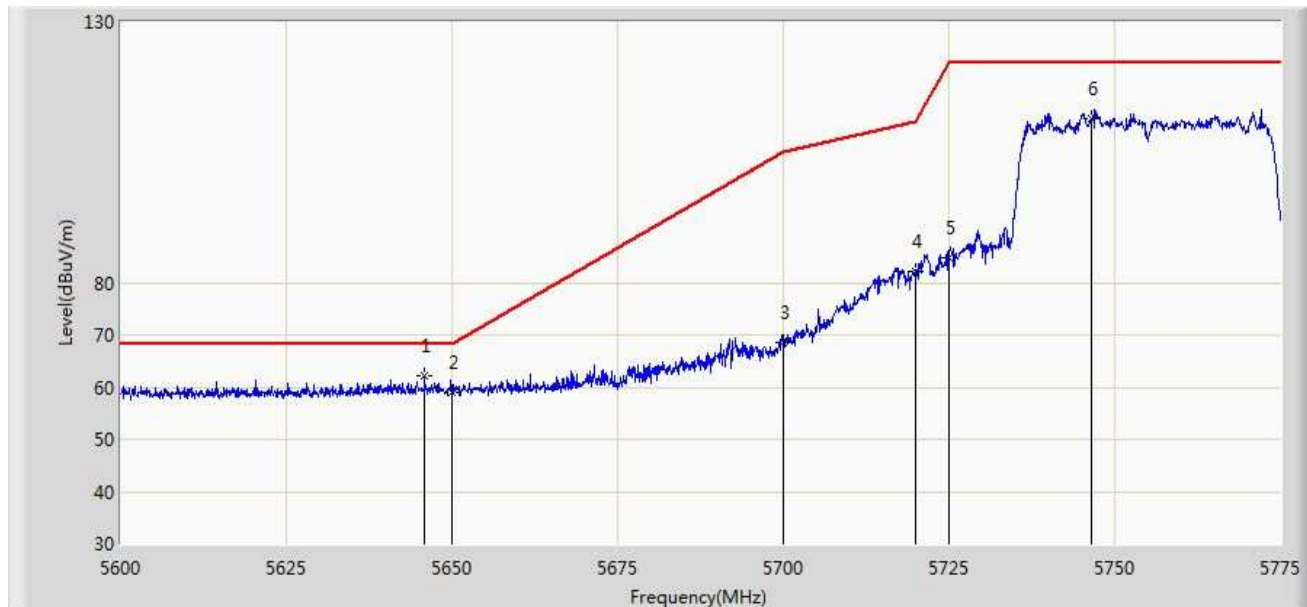


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5645.850	62.144	57.414	-6.056	68.200	4.731	PK
2			5650.000	58.975	54.229	-9.225	68.200	4.746	PK
3			5700.000	68.454	63.516	-36.746	105.200	4.938	PK
4			5720.000	82.203	77.188	-28.597	110.800	5.015	PK
5			5725.000	84.776	79.742	-37.424	122.200	5.034	PK
6			5746.562	111.476	106.360	N/A	N/A	5.116	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2019/06/28 - 04:47
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D	Polarity: Horizontal
EUT: Aruba 500 接入點	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at channel 5795MHz Ant 0 + 1	

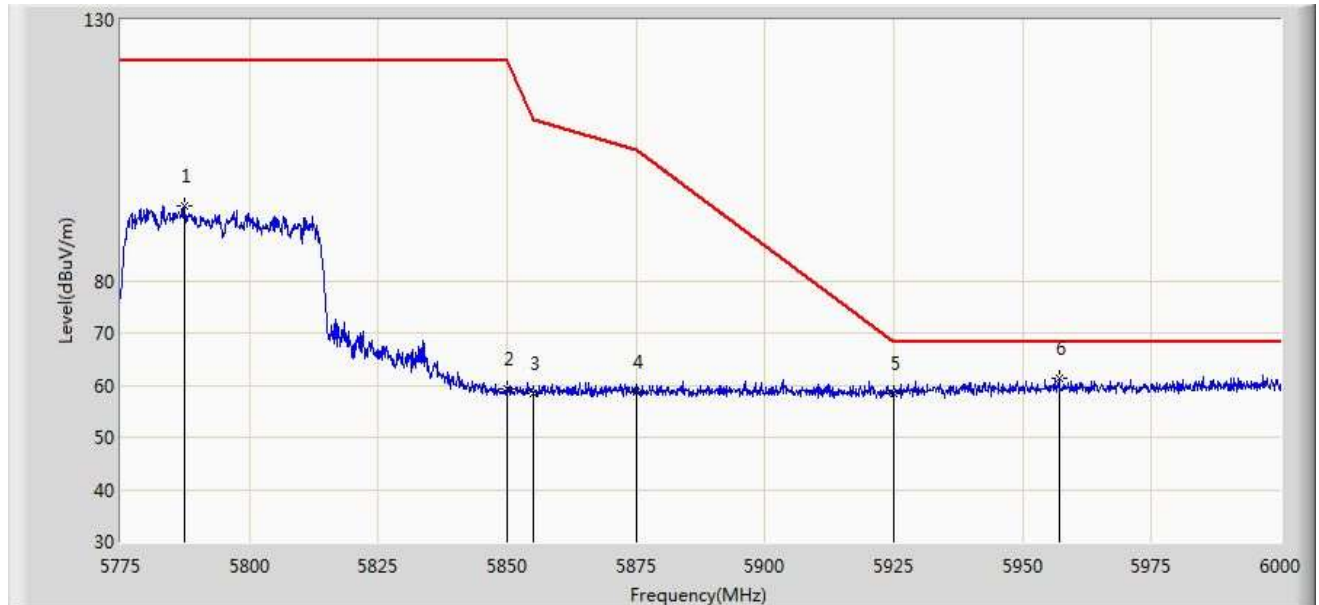


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5787.487	94.400	89.126	N/A	N/A	5.275	PK
2			5850.000	59.160	53.646	-63.040	122.200	5.514	PK
3			5855.000	58.357	52.824	-52.443	110.800	5.533	PK
4			5875.000	58.624	53.014	-46.576	105.200	5.610	PK
5			5925.000	58.465	52.663	-9.735	68.200	5.802	PK
6		*	5957.025	61.224	55.299	-6.976	68.200	5.925	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2019/06/28 - 04:48
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D	Polarity: Vertical
EUT: Aruba 500 接入點	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at channel 5795MHz Ant 0 + 1	

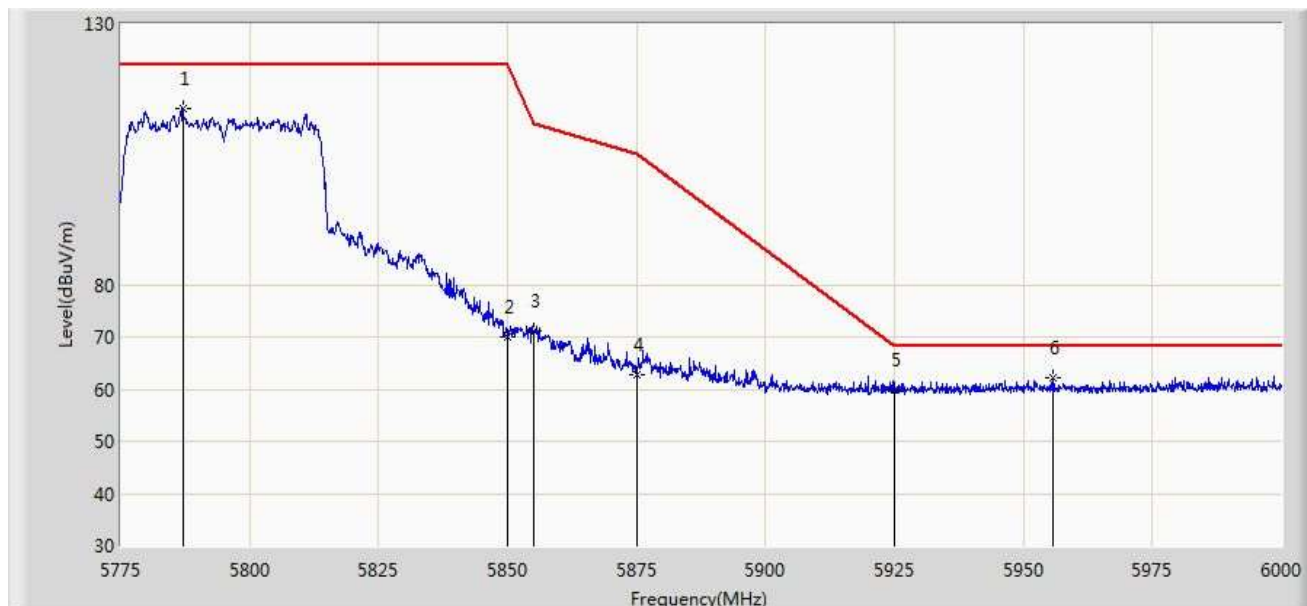


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5787.038	113.834	108.561	N/A	N/A	5.273	PK
2			5850.000	70.047	64.533	-52.153	122.200	5.514	PK
3			5855.000	71.060	65.527	-39.740	110.800	5.533	PK
4			5875.000	62.857	57.247	-42.343	105.200	5.610	PK
5			5925.000	59.992	54.190	-8.208	68.200	5.802	PK
6		*	5955.788	62.033	56.112	-6.167	68.200	5.921	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2019/07/02 - 04:43
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D	Polarity: Horizontal
EUT: Aruba 500 接入點	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11ax-HE80 at channel 5210MHz Ant 0 + 1	

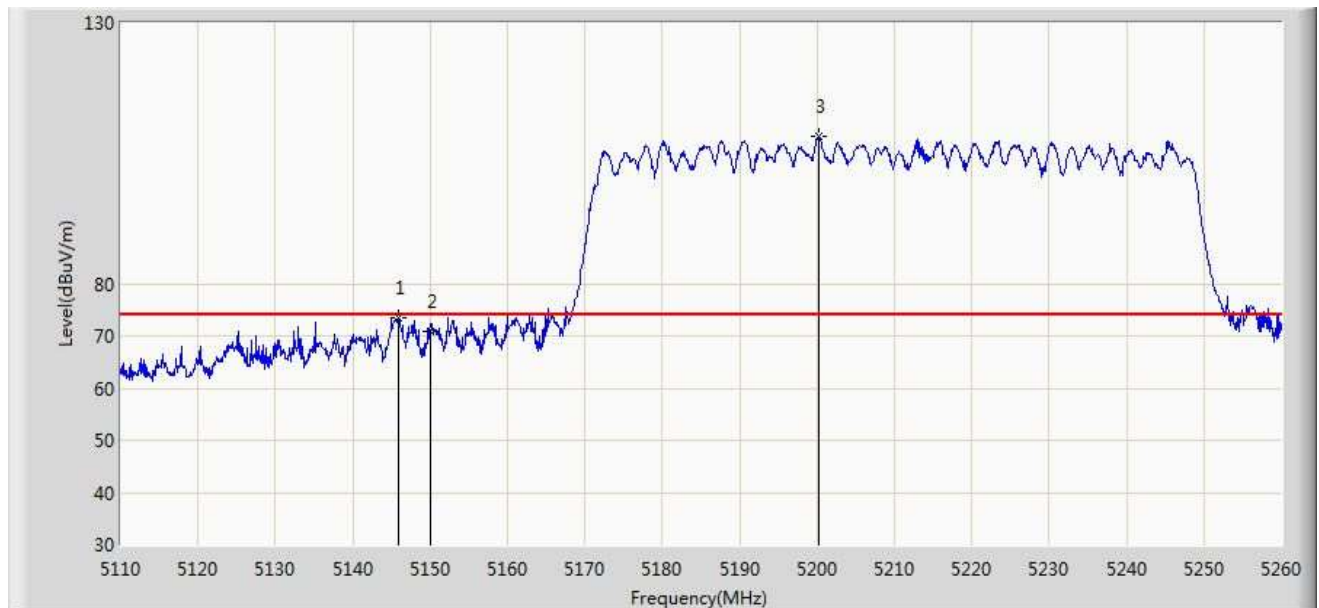


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5145.925	73.403	69.531	-0.597	74.000	3.872	PK
2			5150.000	70.815	66.939	-3.185	74.000	3.876	PK
3		*	5200.150	108.208	104.290	N/A	N/A	3.918	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2019/07/02 - 04:46
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D	Polarity: Horizontal
EUT: Aruba 500 接入點	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11ax-HE80 at channel 5210MHz Ant 0 + 1	

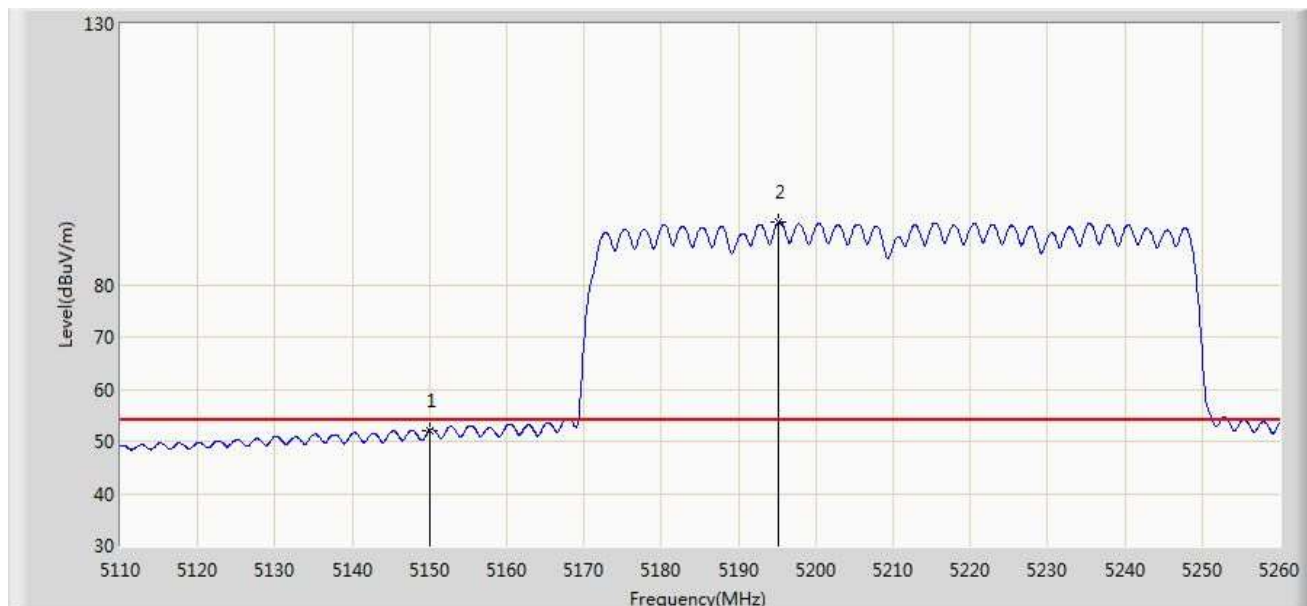


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	52.059	48.183	-1.941	54.000	3.876	AV
2		*	5195.200	91.977	88.063	N/A	N/A	3.914	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2019/07/02 - 04:48
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D	Polarity: Vertical
EUT: Aruba 500 接入點	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11ax-HE80 at channel 5210MHz Ant 0 + 1	

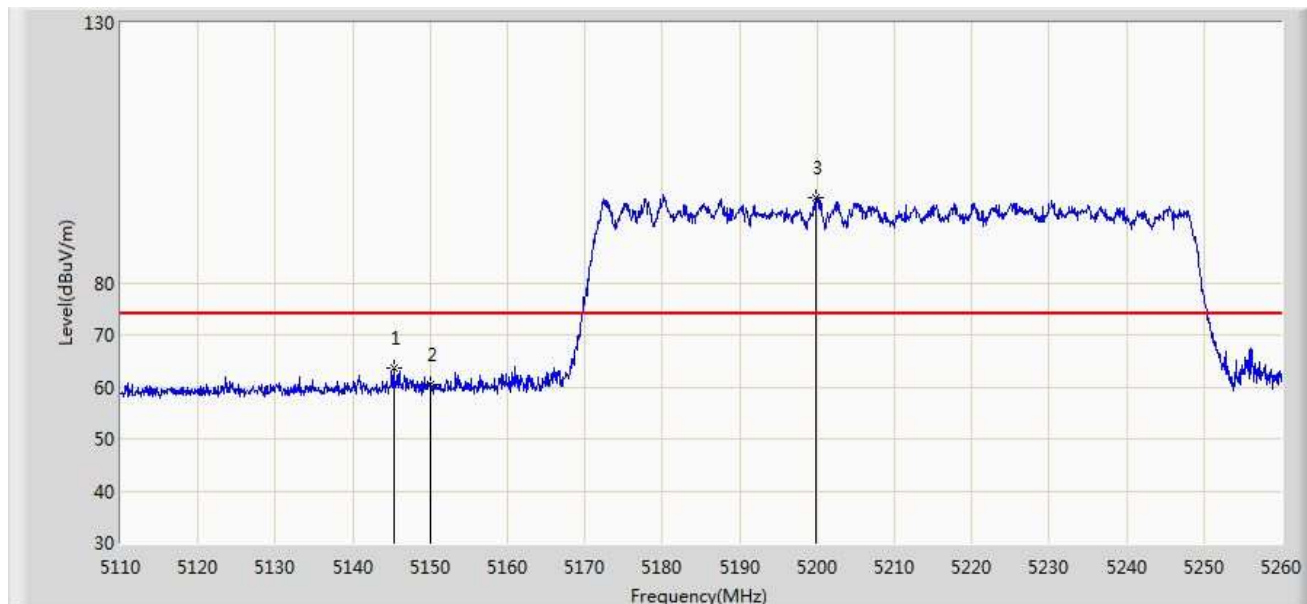


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5145.325	63.515	59.643	-10.485	74.000	3.872	PK
2			5150.000	60.482	56.606	-13.518	74.000	3.876	PK
3		*	5199.925	96.319	92.401	N/A	N/A	3.918	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2019/07/02 - 04:48
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D	Polarity: Vertical
EUT: Aruba 500 接入點	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11ax-HE80 at channel 5210MHz Ant 0 + 1	

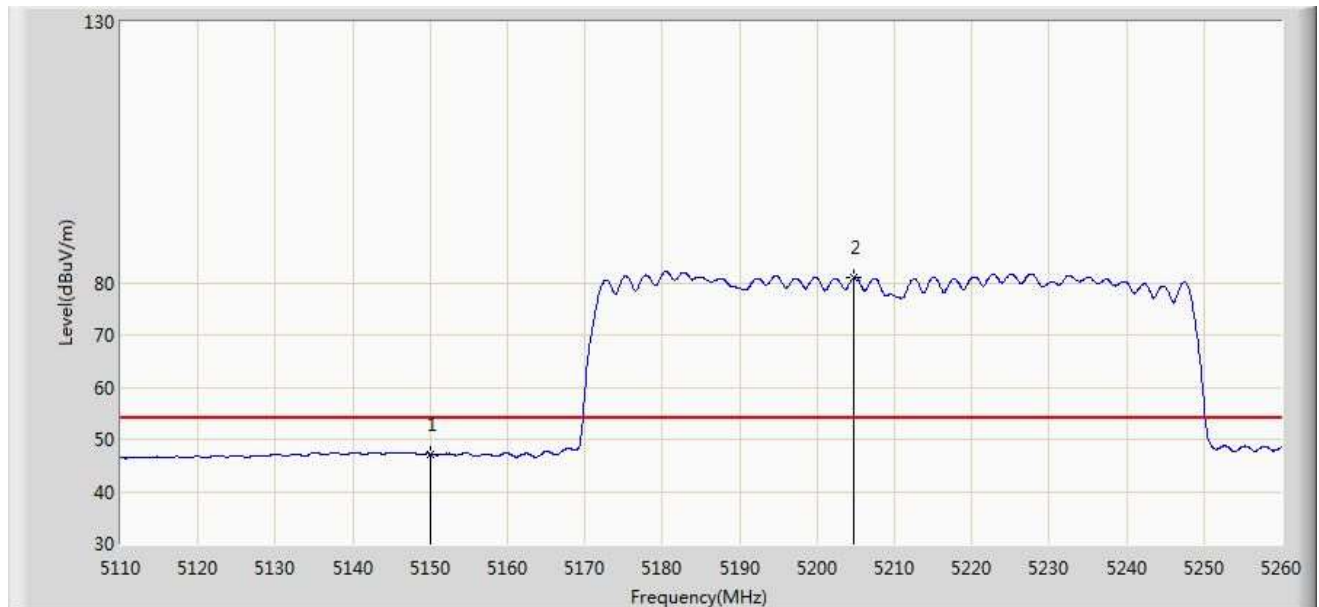


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	47.239	43.363	-6.761	54.000	3.876	AV
2		*	5204.800	81.095	77.173	N/A	N/A	3.922	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2019/06/28 - 05:01
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D	Polarity: Horizontal
EUT: Aruba 500 接入點	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11ax-HE80 at channel 5290MHz Ant 0 + 1	

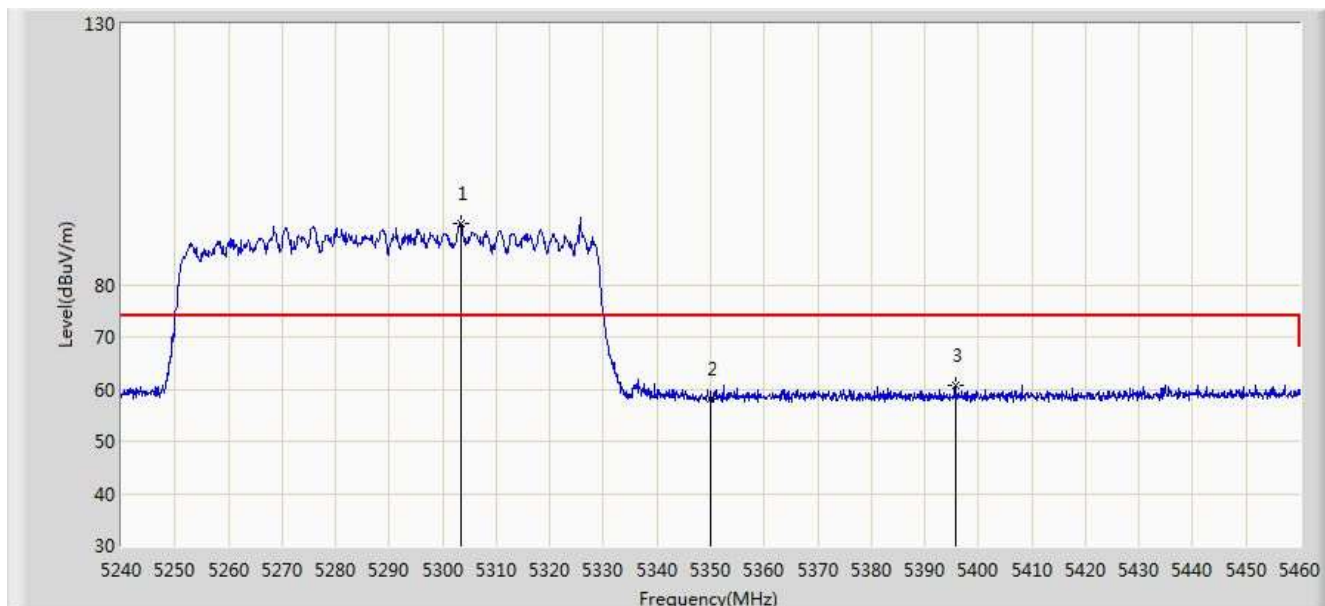


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5303.360	91.849	87.845	N/A	N/A	4.004	PK
2			5350.000	58.168	54.124	-15.832	74.000	4.044	PK
3			5395.650	60.742	56.660	-13.258	74.000	4.082	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2019/06/28 - 05:03
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D	Polarity: Horizontal
EUT: Aruba 500 接入點	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11ax-HE80 at channel 5290MHz Ant 0 + 1	

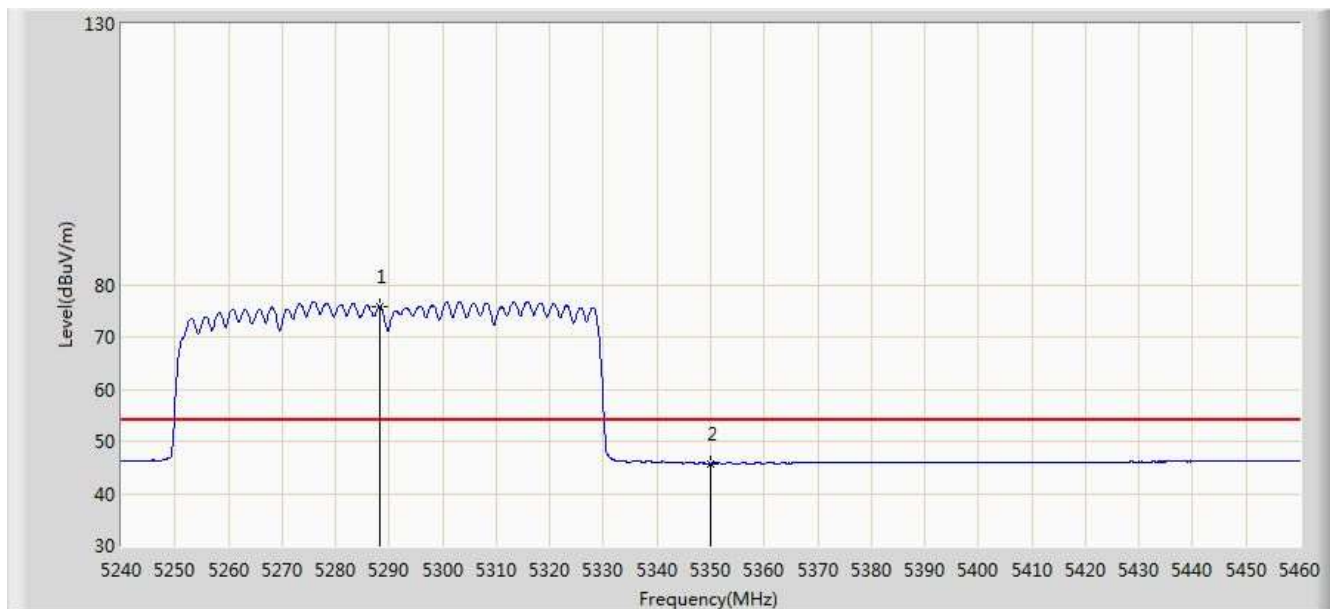


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5288.180	75.877	71.885	N/A	N/A	3.992	AV
2			5350.000	45.682	41.638	-8.318	54.000	4.044	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2019/06/28 - 04:57
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D	Polarity: Vertical
EUT: Aruba 500 接入點	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11ax-HE80 at channel 5290MHz Ant 0 + 1	

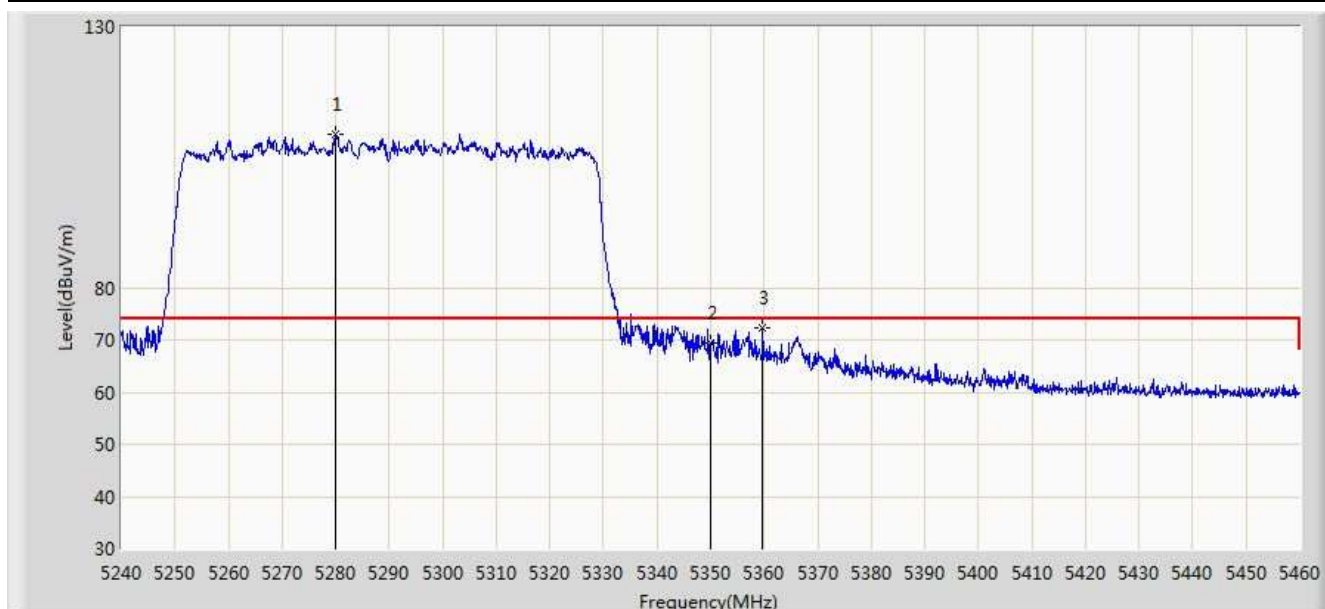


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5280.040	109.475	105.490	N/A	N/A	3.985	PK
2			5350.000	69.438	65.394	-4.562	74.000	4.044	PK
3			5359.680	72.294	68.242	-1.706	74.000	4.052	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2019/06/28 - 04:59
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D	Polarity: Vertical
EUT: Aruba 500 接入點	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11ax-HE80 at channel 5290MHz Ant 0 + 1	

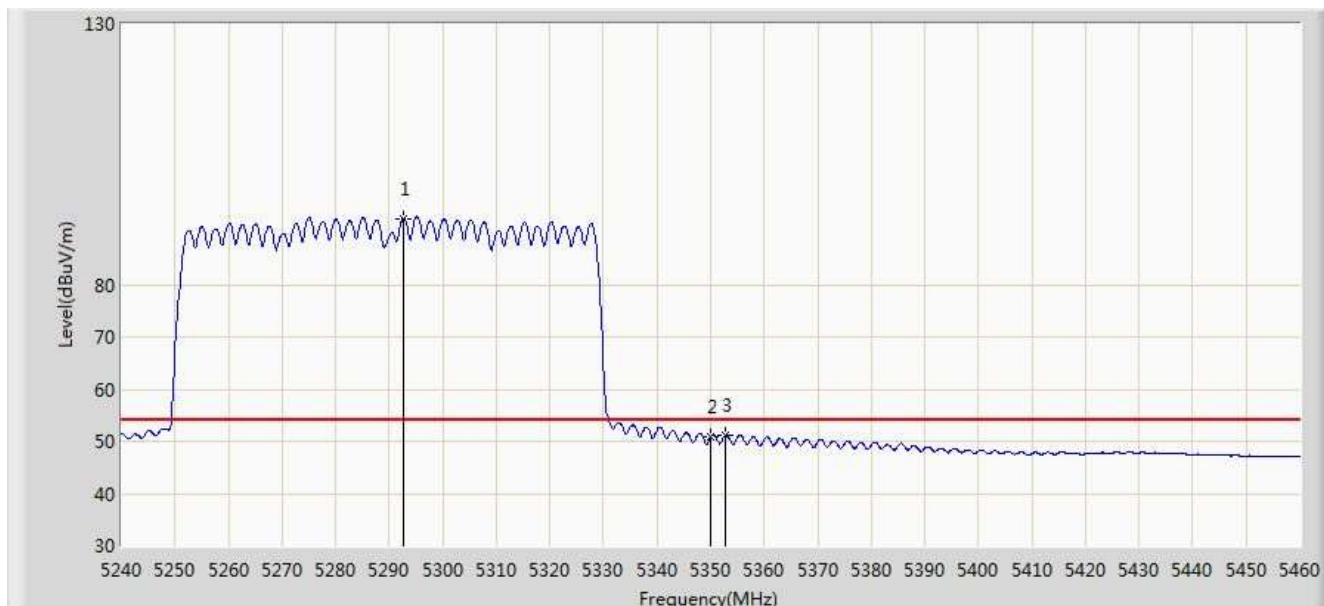


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5292.580	92.612	88.617	N/A	N/A	3.995	AV
2			5350.000	50.734	46.690	-3.266	54.000	4.044	AV
3			5352.750	51.146	47.099	-2.854	54.000	4.047	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2019/06/28 - 05:11
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D	Polarity: Horizontal
EUT: Aruba 500 接入點	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11ax-HE80 at channel 5530MHz Ant 0 + 1	

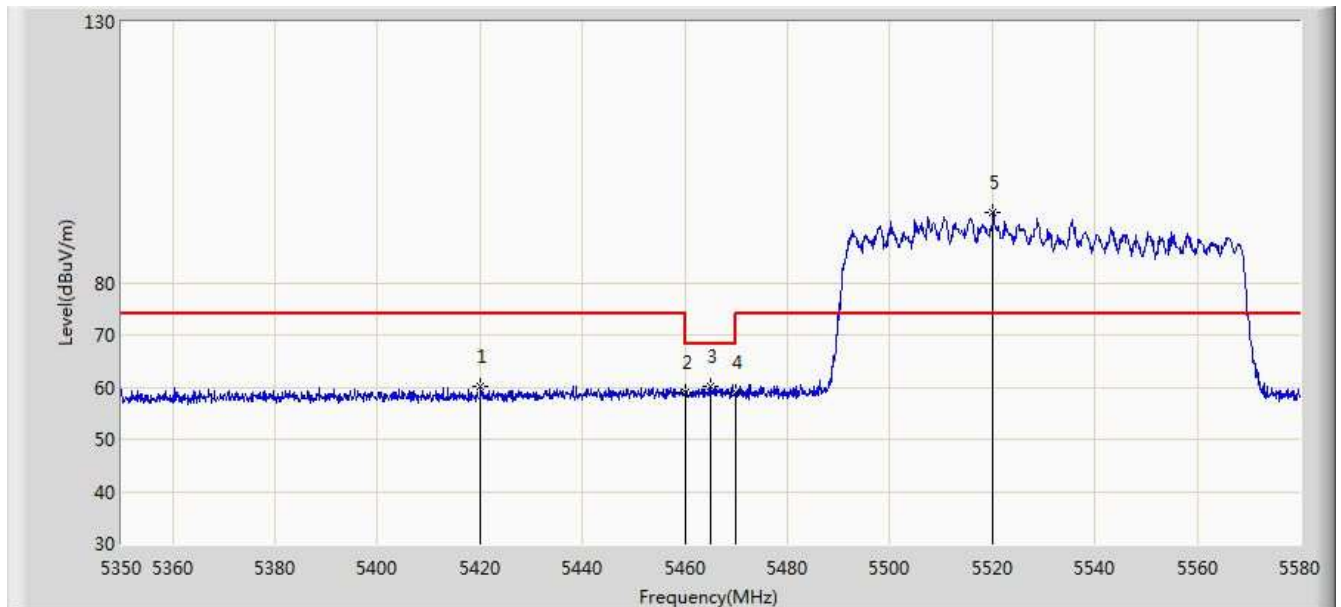


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5420.150	60.280	56.177	-13.720	74.000	4.103	PK
2			5460.000	58.871	54.735	-15.129	74.000	4.136	PK
3			5465.115	60.182	56.042	-8.018	68.200	4.140	PK
4			5470.000	59.053	54.909	-9.147	68.200	4.144	PK
5		*	5520.085	93.612	89.365	N/A	N/A	4.248	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2019/06/28 - 05:12
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D	Polarity: Horizontal
EUT: Aruba 500 接入點	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11ax-HE80 at channel 5530MHz Ant 0 + 1	

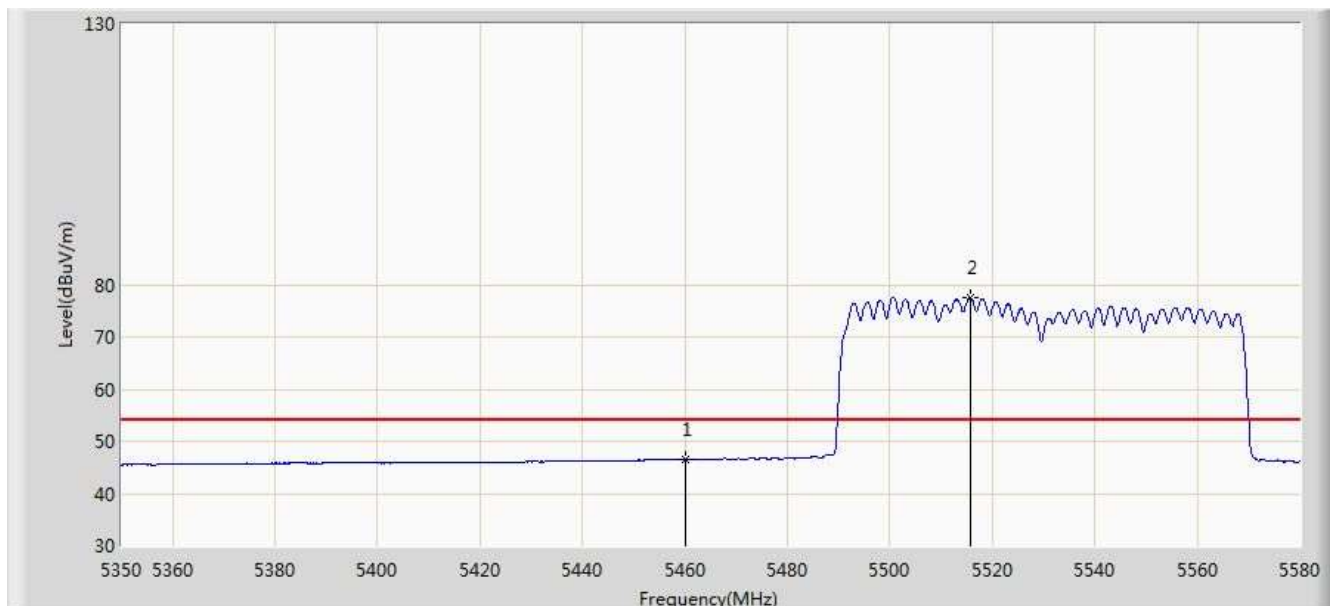


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	46.567	36.347	-7.433	54.000	10.220	AV
2		*	5515.830	77.400	67.088	N/A	N/A	10.313	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2019/06/28 - 05:08
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D	Polarity: Vertical
EUT: Aruba 500 接入點	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11ax-HE80 at channel 5530MHz Ant 0 + 1	

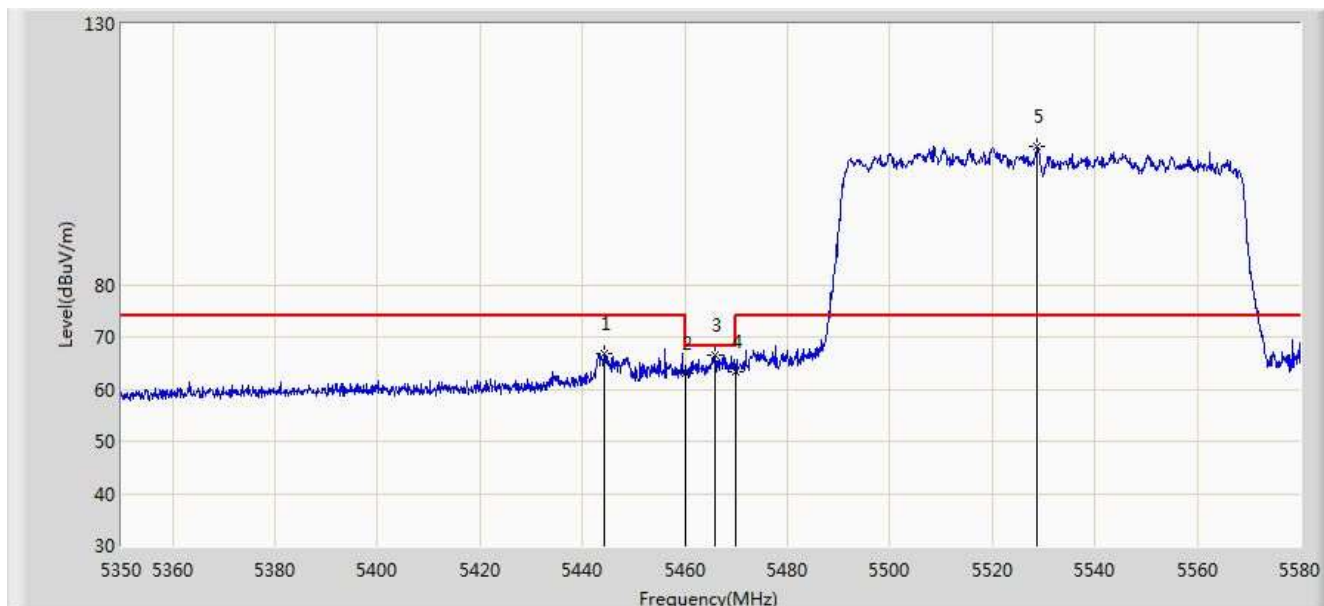


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5444.185	66.806	62.683	-7.194	74.000	4.123	PK
2			5460.000	62.913	58.777	-11.087	74.000	4.136	PK
3			5465.920	66.663	62.522	-1.537	68.200	4.141	PK
4			5470.000	63.392	59.248	-4.808	68.200	4.144	PK
5		*	5528.825	106.464	102.183	N/A	N/A	4.280	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2019/06/28 - 05:10
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D	Polarity: Vertical
EUT: Aruba 500 接入點	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11ax-HE80 at channel 5530MHz Ant 0 + 1	

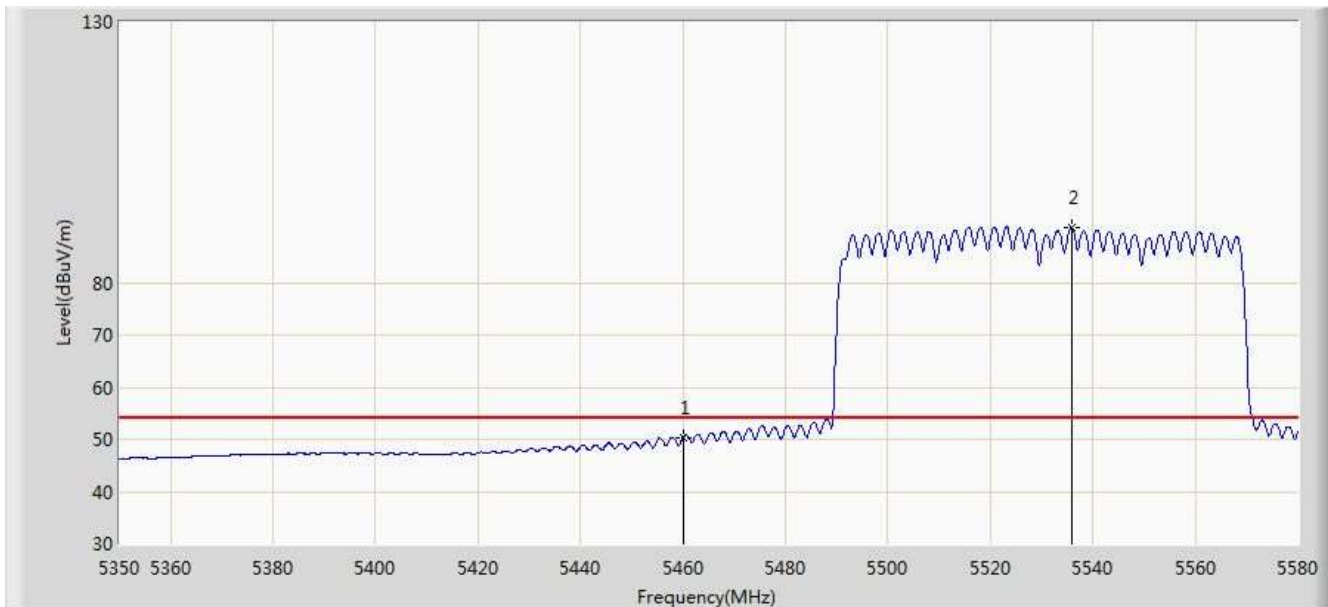


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	50.347	46.211	-3.653	54.000	4.136	AV
2		*	5535.840	90.509	86.201	N/A	N/A	4.307	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2019/07/02 - 05:02
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D	Polarity: Horizontal
EUT: Aruba 500 接入點	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11ax-HE80 at channel 5610MHz Ant 0 + 1	

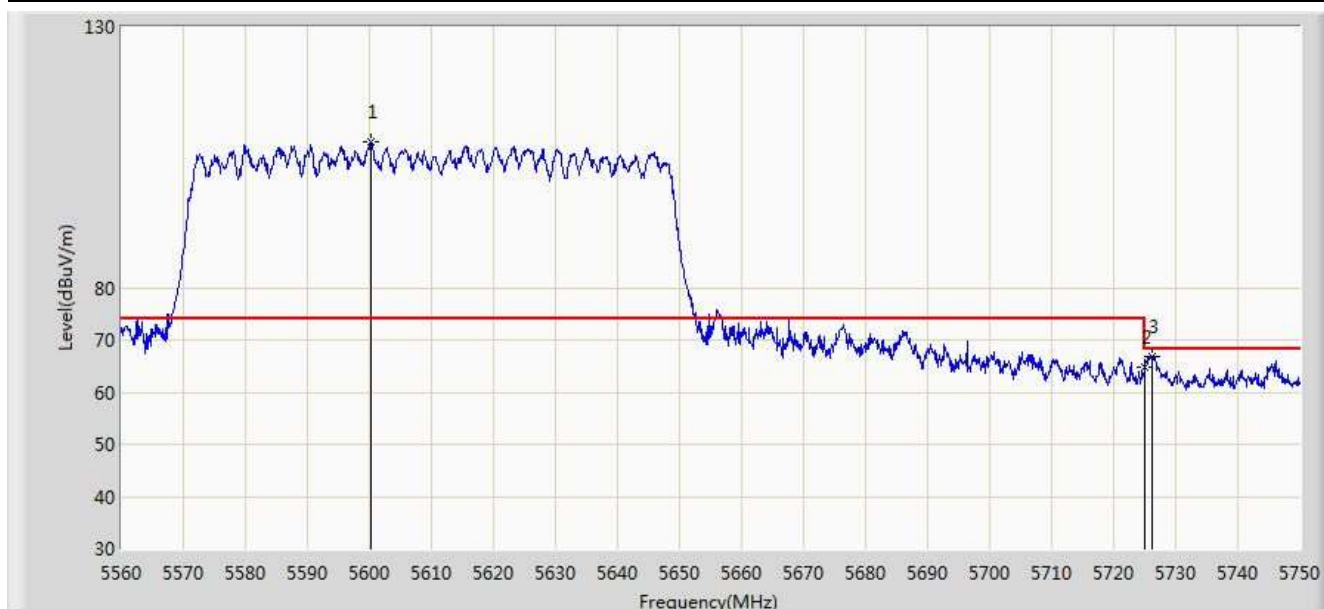


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5600.280	108.052	103.497	N/A	N/A	4.555	PK
2			5725.000	64.832	59.798	-3.368	68.200	5.034	PK
3			5726.250	66.818	61.779	-1.382	68.200	5.038	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2019/07/02 - 05:05
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D	Polarity: Vertical
EUT: Aruba 500 接入點	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11ax-HE80 at channel 5610MHz Ant 0 + 1	

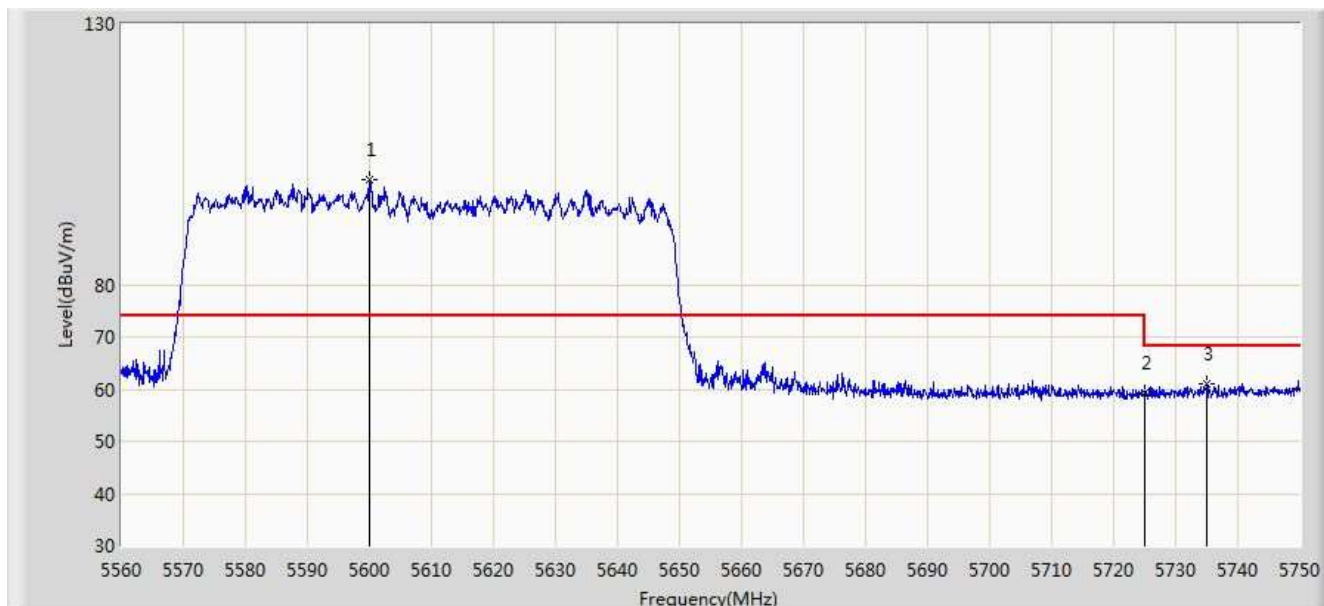


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5599.995	100.065	95.511	N/A	N/A	4.554	PK
2			5725.000	59.183	54.149	-9.017	68.200	5.034	PK
3			5735.085	60.952	55.880	-7.248	68.200	5.072	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2019/06/28 - 05:16
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D	Polarity: Horizontal
EUT: Aruba 500 接入點	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11ax-HE80 at channel 5775MHz Ant 0 + 1	

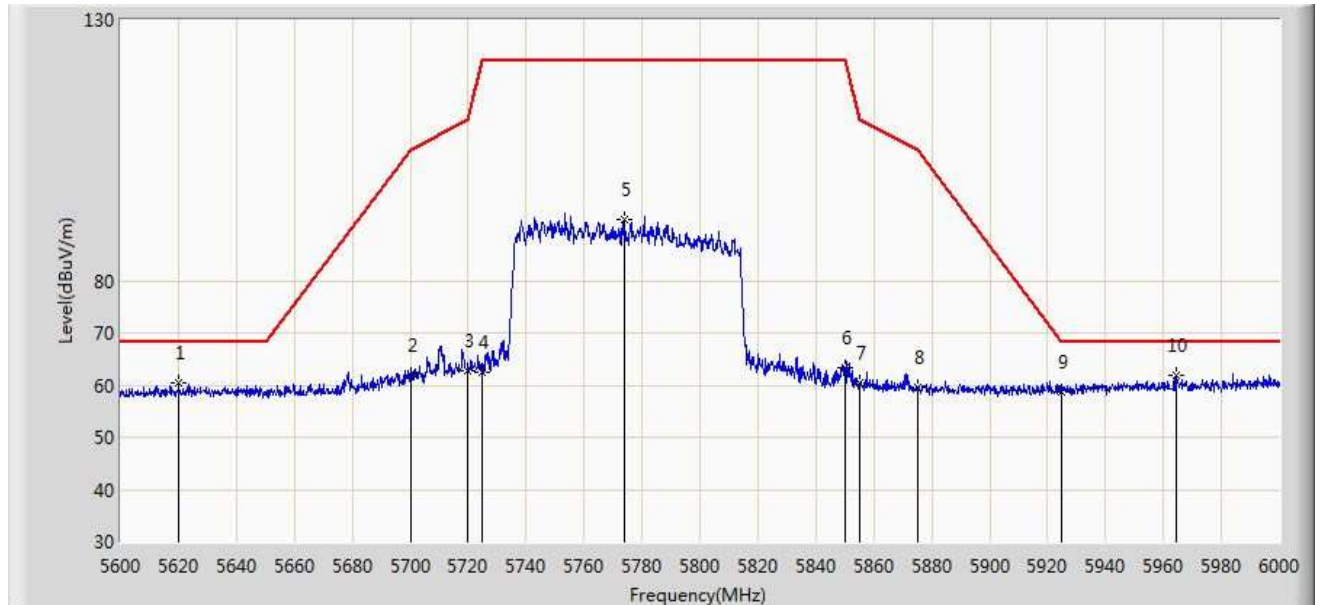


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5620.000	60.364	55.733	-7.836	68.200	4.631	PK
2			5700.000	61.774	56.836	-43.426	105.200	4.938	PK
3			5720.000	62.860	57.845	-47.940	110.800	5.015	PK
4			5725.000	62.491	57.457	-59.709	122.200	5.034	PK
5			5773.800	91.651	86.429	N/A	N/A	5.221	PK
6			5850.000	63.391	57.877	-58.809	122.200	5.514	PK
7			5855.000	60.414	54.881	-50.386	110.800	5.533	PK
8			5875.000	59.606	53.996	-45.594	105.200	5.610	PK
9			5925.000	58.703	52.901	-9.497	68.200	5.802	PK
10		*	5964.400	62.003	56.049	-6.197	68.200	5.953	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2019/06/28 - 05:18
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D	Polarity: Vertical
EUT: Aruba 500 接入點	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11ax-HE80 at channel 5775MHz Ant 0 + 1	

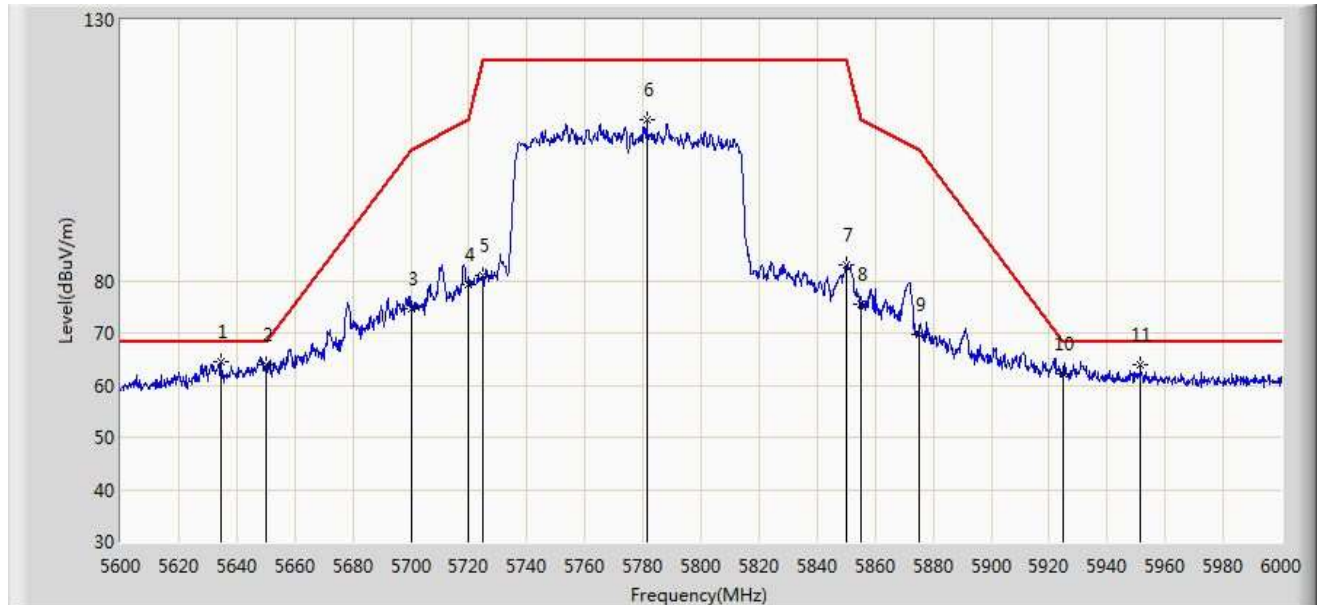


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5634.600	64.362	59.675	-3.838	68.200	4.686	PK
2			5650.000	63.815	59.069	-4.385	68.200	4.746	PK
3			5700.000	74.735	69.797	-30.465	105.200	4.938	PK
4			5720.000	79.373	74.358	-31.427	110.800	5.015	PK
5			5725.000	80.978	75.944	-41.222	122.200	5.034	PK
6			5781.400	110.858	105.607	N/A	N/A	5.251	PK
7			5850.000	83.175	77.661	-39.025	122.200	5.514	PK
8			5855.000	75.566	70.033	-35.234	110.800	5.533	PK
9			5875.000	69.606	63.996	-35.594	105.200	5.610	PK
10			5925.000	62.158	56.356	-6.042	68.200	5.802	PK
11			5951.400	63.808	57.904	-4.392	68.200	5.903	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

For APIN0504Omni Antenna (AP-ANT-19):

Site: AC1	Time: 2019/06/28 - 22:35
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D	Polarity: Horizontal
EUT: Aruba 500 接入點	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11 a at channel 5180MHz Ant 0 + 1	

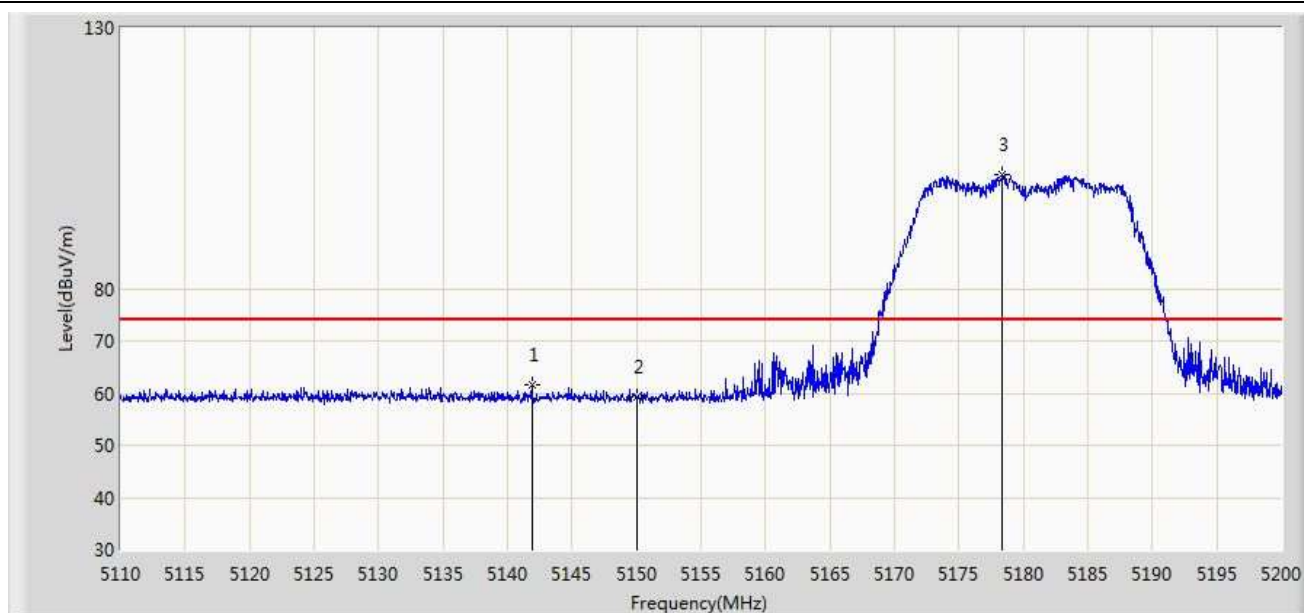


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5141.905	61.669	57.800	-12.331	74.000	3.869	PK
2		5150.000	59.297	55.421	-14.703	74.000	3.876	PK
3	*	5178.400	101.971	98.071	N/A	N/A	3.900	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2019/06/28 - 22:37
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D	Polarity: Horizontal
EUT: Aruba 500 接入點	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11 a at channel 5180MHz Ant 0 + 1	

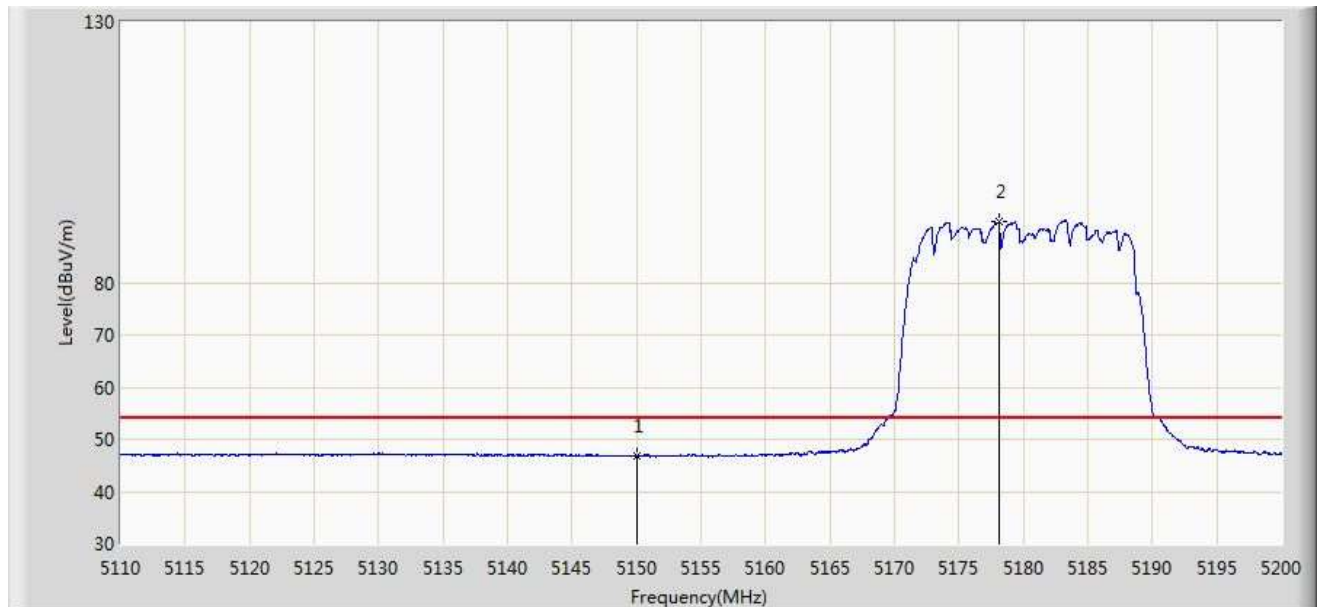


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5150.000	46.801	42.925	-7.199	54.000	3.876	AV
2	*	5178.130	91.649	87.749	N/A	N/A	3.900	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2019/06/28 - 22:32
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D	Polarity: Vertical
EUT: Aruba 500 接入點	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11 a at channel 5180MHz Ant 0 + 1	

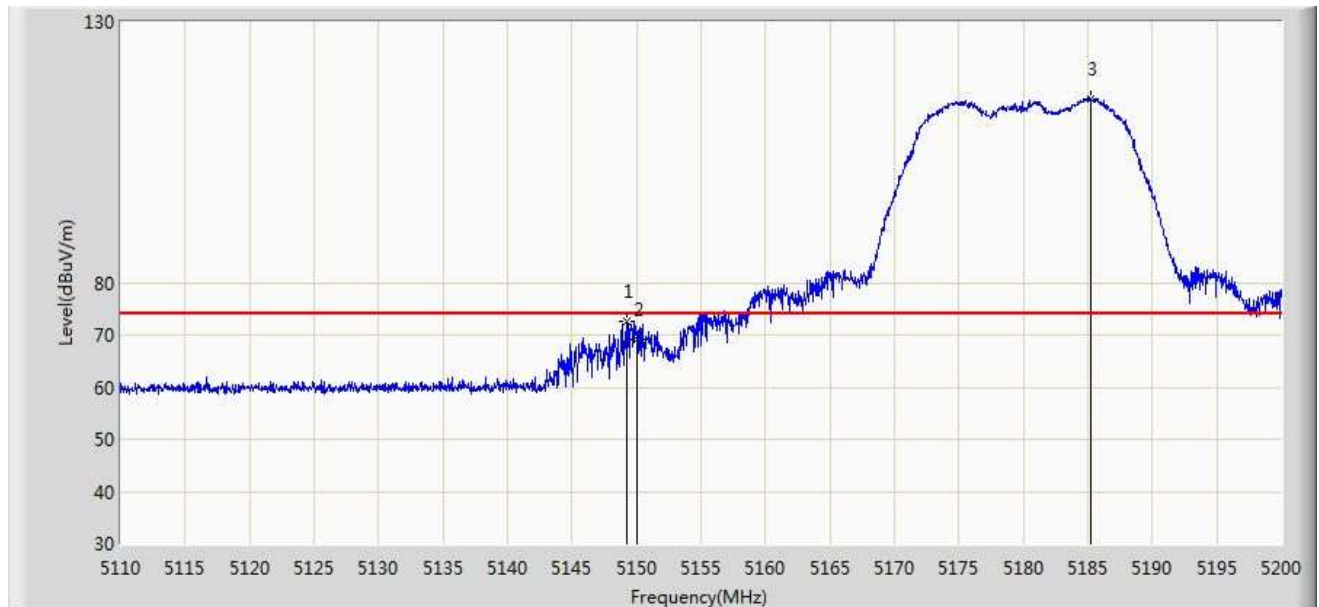

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5149.195	72.481	68.606	-1.519	74.000	3.875	PK
2		5150.000	69.176	65.300	-4.824	74.000	3.876	PK
3	*	5185.240	115.287	111.381	N/A	N/A	3.906	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2019/06/28 - 22:34
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D	Polarity: Vertical
EUT: Aruba 500 接入點	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11 a at channel 5180MHz Ant 0 + 1	




No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5150.000	48.519	44.643	-5.481	54.000	3.876	AV
2	*	5175.160	104.773	100.876	N/A	N/A	3.897	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2019/06/28 - 22:41
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D	Polarity: Horizontal
EUT: Aruba 500 接入點	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11 a at channel 5320MHz Ant 0 + 1	

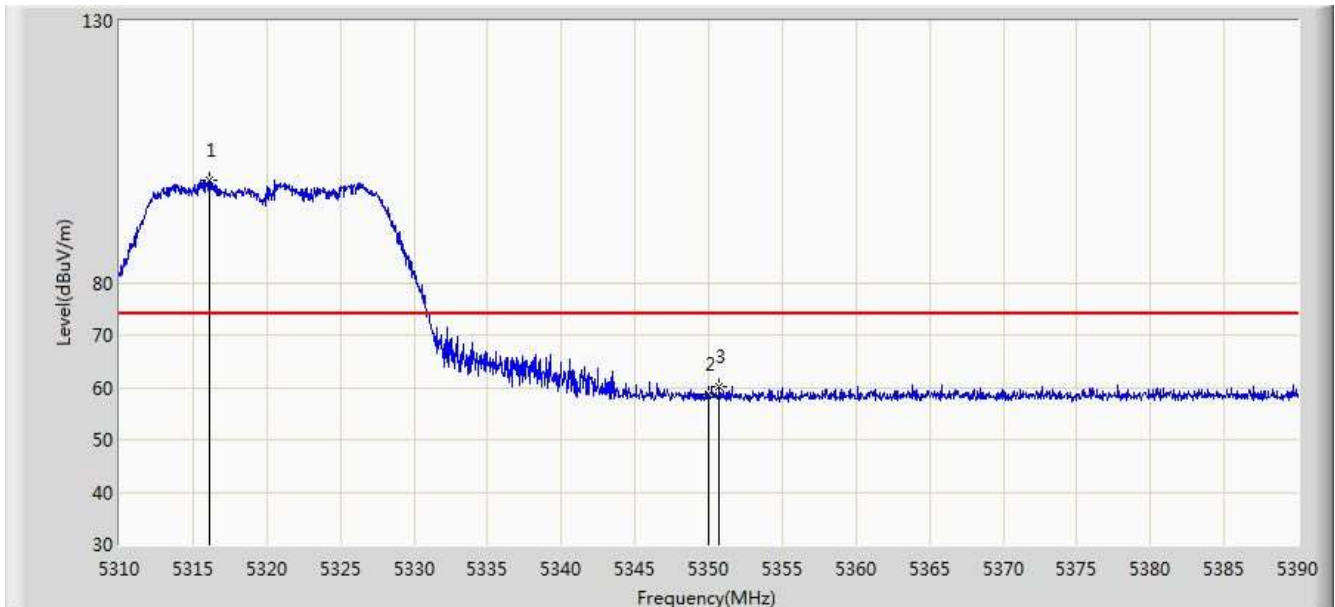


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5316.120	99.645	95.630	N/A	N/A	4.015	PK
2		5350.000	58.726	54.682	-15.274	74.000	4.044	PK
3		5350.720	60.084	56.039	-13.916	74.000	4.045	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2019/06/28 - 22:41
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D	Polarity: Horizontal
EUT: Aruba 500 接入點	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11 a at channel 5320MHz Ant 0 + 1	

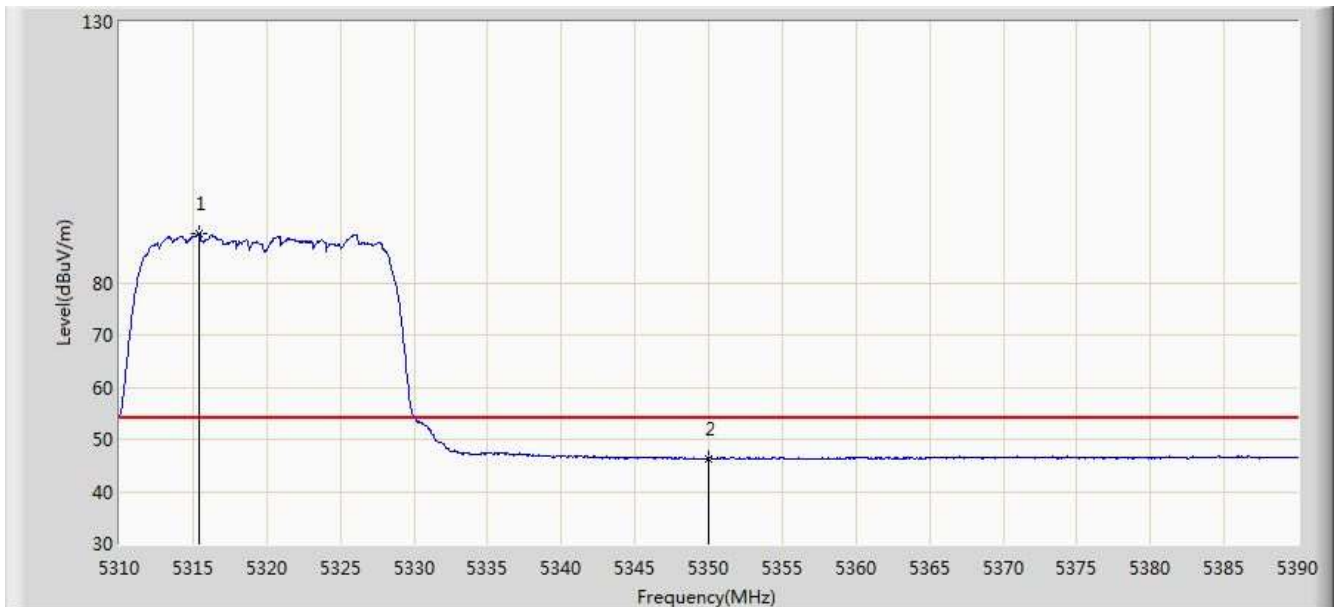


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5315.440	89.402	85.387	N/A	N/A	4.015	AV
2		5350.000	46.269	42.225	-7.731	54.000	4.044	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2019/06/28 - 22:40
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D	Polarity: Vertical
EUT: Aruba 500 接入點	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11 a at channel 5320MHz Ant 0 + 1	

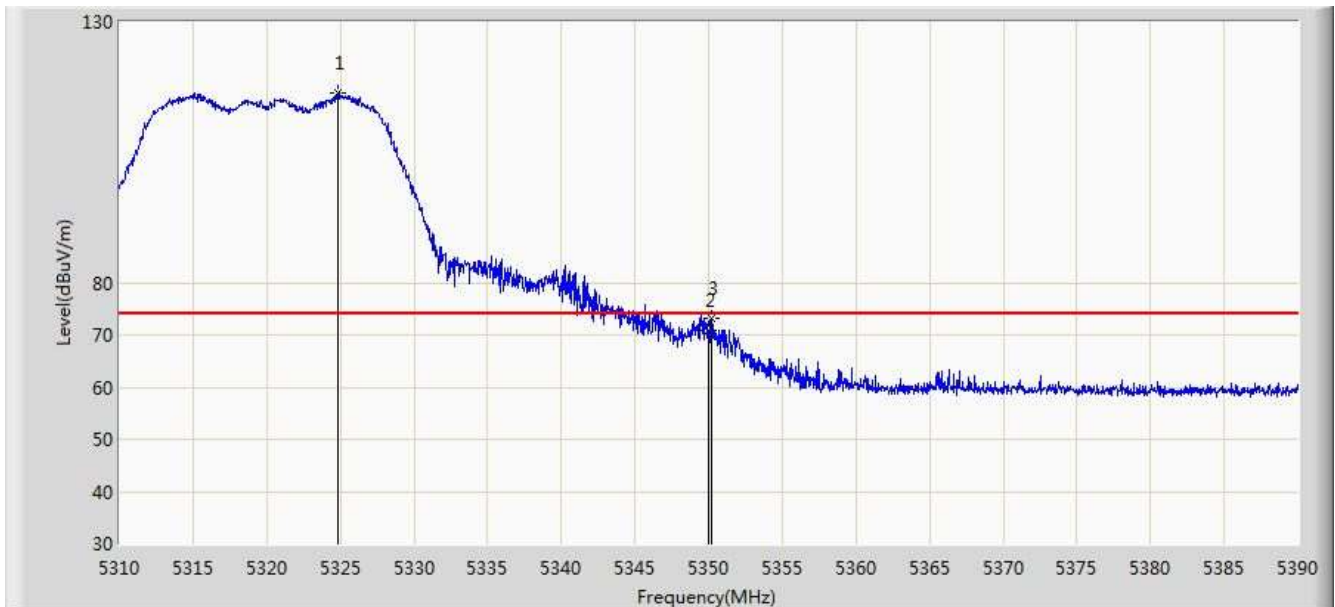


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5324.880	116.421	112.398	N/A	N/A	4.023	PK
2		5350.000	70.945	66.901	-3.055	74.000	4.044	PK
3		5350.240	73.072	69.027	-0.928	74.000	4.045	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2019/06/28 - 22:41
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D	Polarity: Vertical
EUT: Aruba 500 接入點	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11 a at channel 5320MHz Ant 0 + 1	

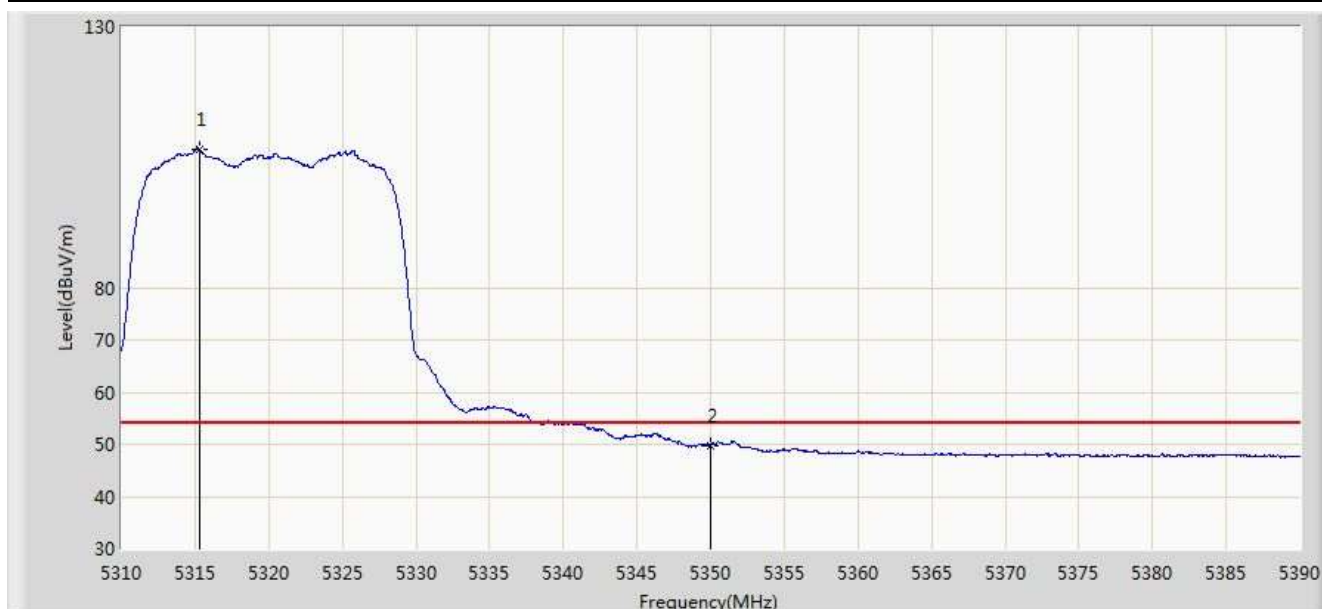


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5315.320	106.578	102.563	N/A	N/A	4.015	AV
2		5350.000	49.851	45.807	-4.149	54.000	4.044	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2019/06/28 - 22:48
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D	Polarity: Horizontal
EUT: Aruba 500 接入點	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11 a at channel 5500MHz Ant 0 + 1	

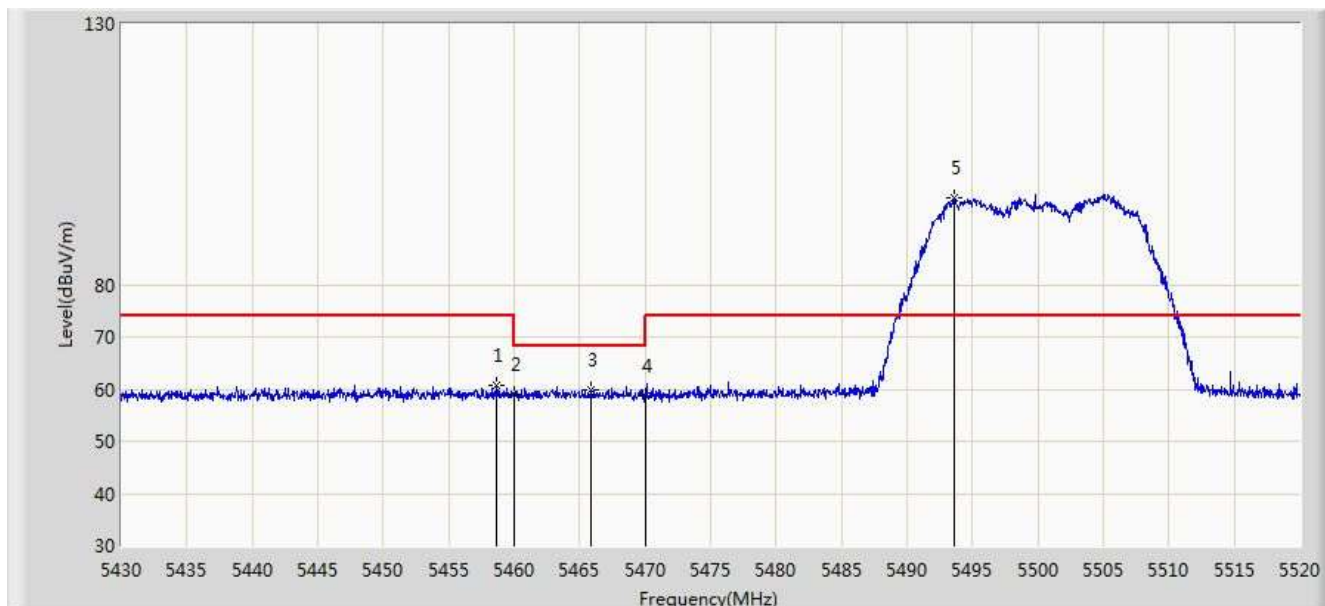


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5458.620	60.587	56.452	-13.413	74.000	4.135	PK
2		5460.000	58.976	54.840	-15.024	74.000	4.136	PK
3		5465.910	59.883	55.742	-8.317	68.200	4.141	PK
4		5470.000	58.592	54.448	-9.608	68.200	4.144	PK
5	*	5493.630	96.729	92.559	N/A	N/A	4.170	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2019/06/28 - 22:48
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D	Polarity: Horizontal
EUT: Aruba 500 接入點	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11 a at channel 5500MHz Ant 0 + 1	

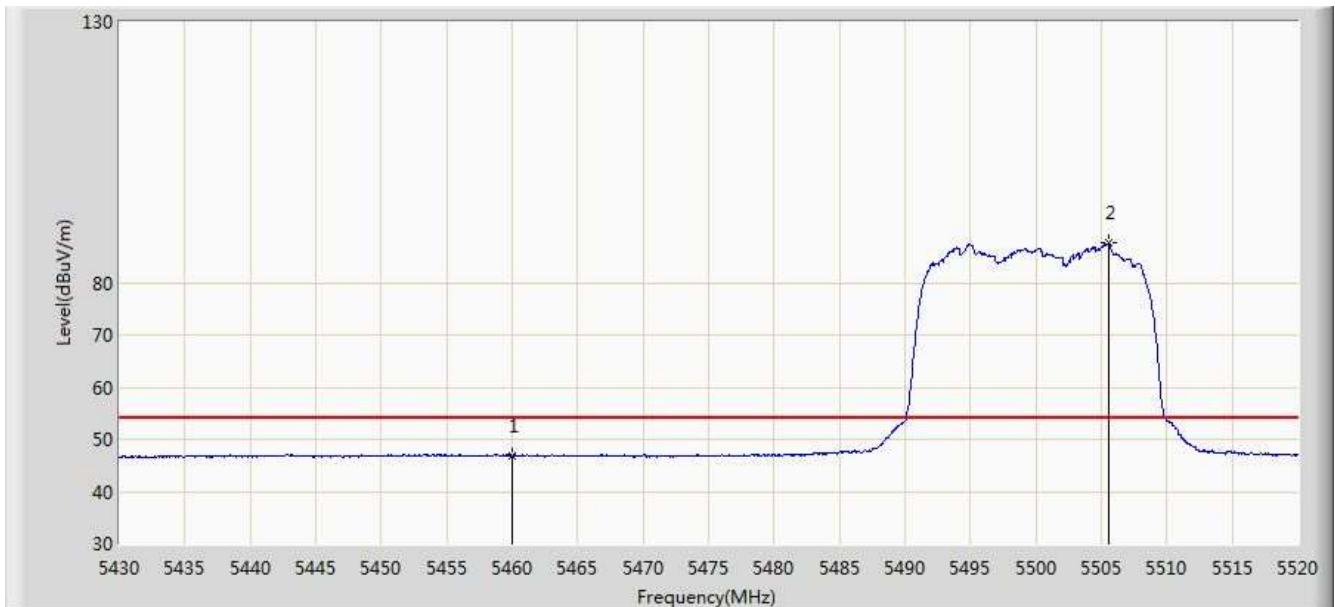


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5460.000	46.734	42.598	-7.266	54.000	4.136	AV
2	*	5505.510	87.636	83.445	N/A	N/A	4.192	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2019/06/28 - 22:46
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D	Polarity: Vertical
EUT: Aruba 500 接入點	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11 a at channel 5500MHz Ant 0 + 1	

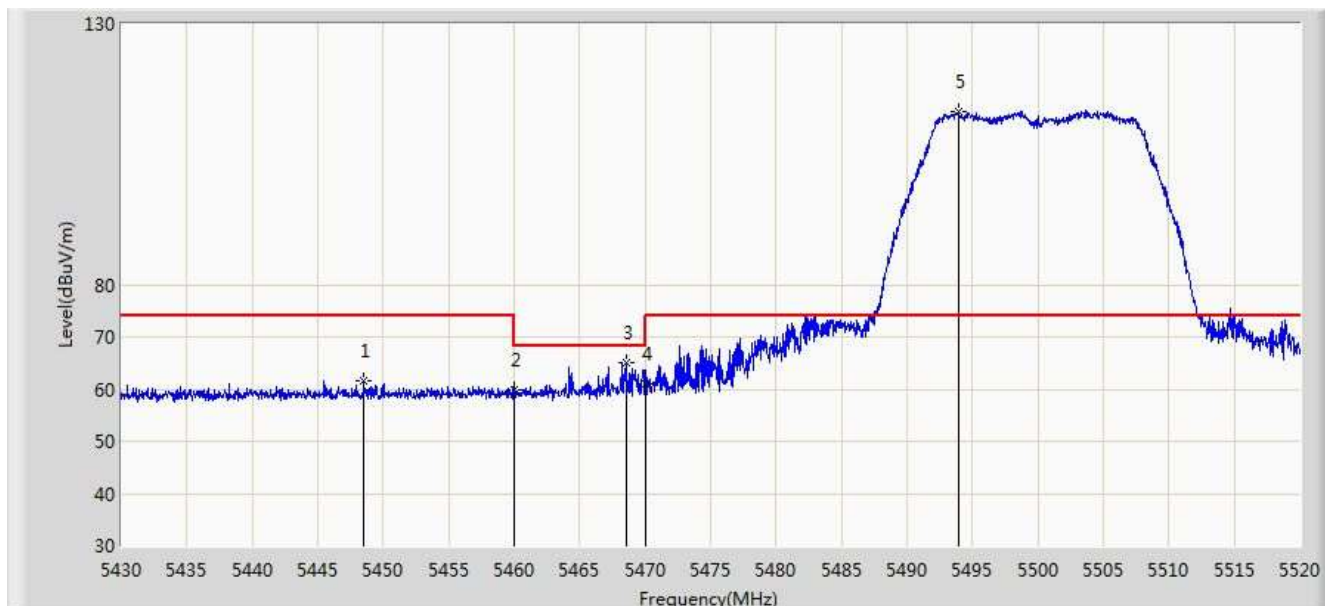


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5448.540	61.719	57.593	-12.281	74.000	4.126	PK
2		5460.000	59.947	55.811	-14.053	74.000	4.136	PK
3		5468.565	64.953	60.810	-3.247	68.200	4.143	PK
4		5470.000	61.109	56.965	-7.091	68.200	4.144	PK
5	*	5493.990	113.154	108.983	N/A	N/A	4.170	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2019/06/28 - 22:47
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D	Polarity: Vertical
EUT: Aruba 500 接入點	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11 a at channel 5500MHz Ant 0 + 1	

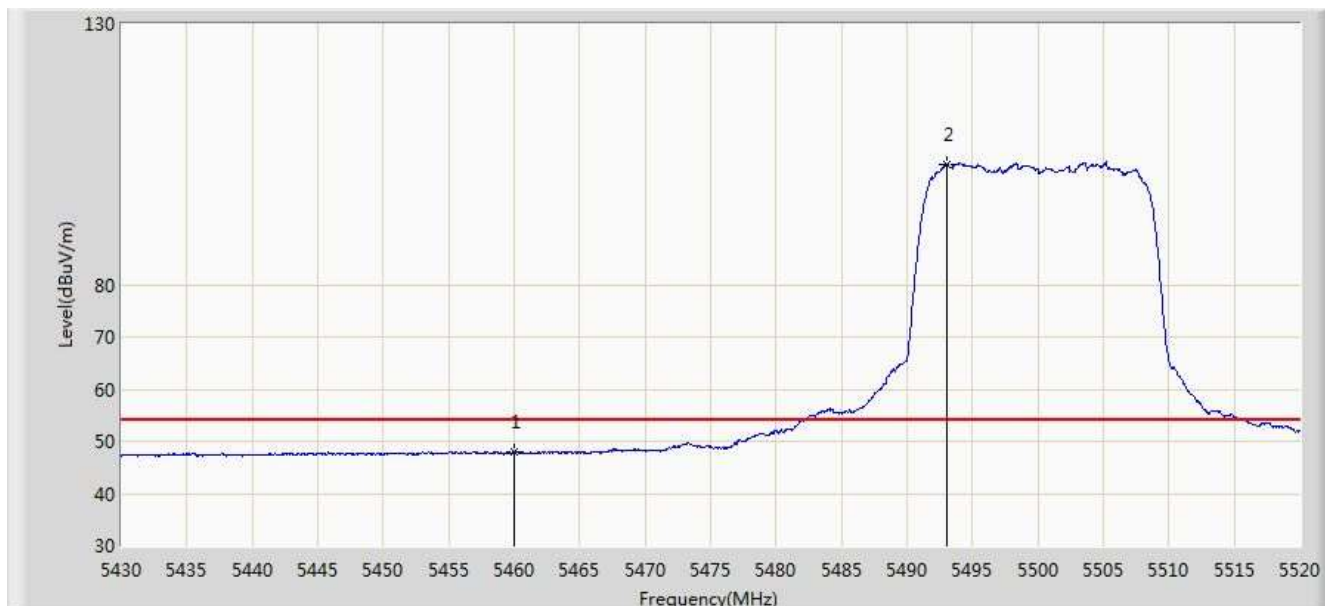


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5460.000	47.836	43.700	-6.164	54.000	4.136	AV
2	*	5493.045	103.159	98.990	N/A	N/A	4.169	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2019/06/28 - 22:53
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D	Polarity: Horizontal
EUT: Aruba 500 接入點	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11 a at channel 5700MHz Ant 0 + 1	

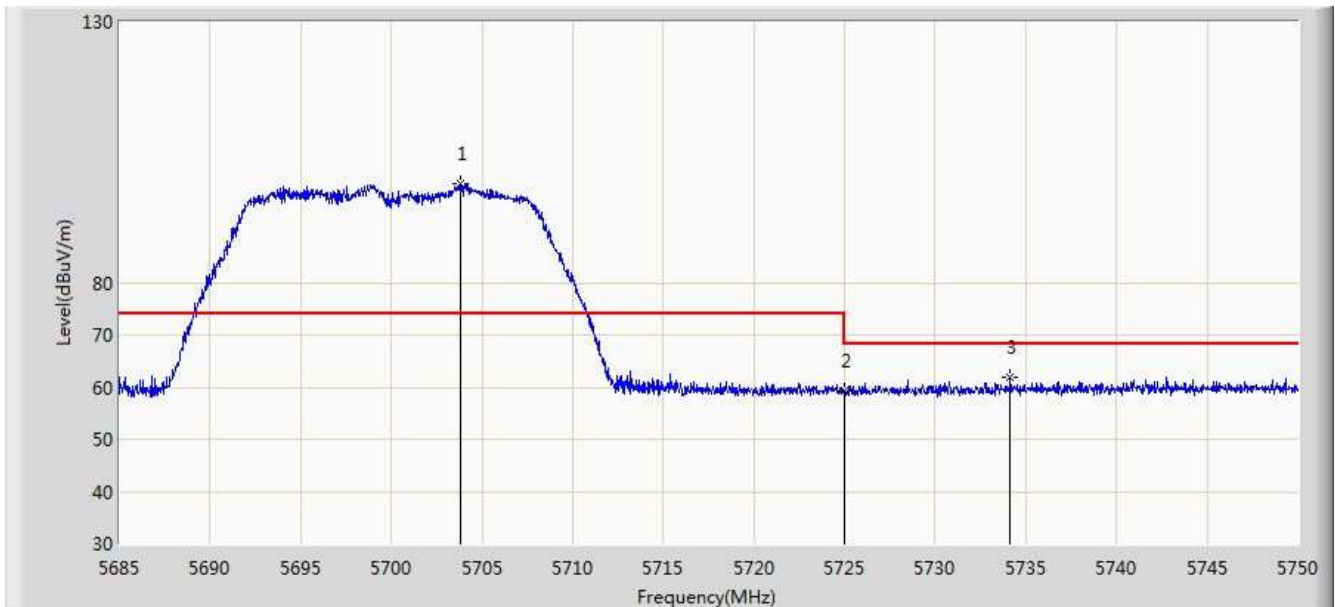


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5703.785	98.888	93.935	N/A	N/A	4.953	PK
2		5725.000	59.282	54.248	-8.918	68.200	5.034	PK
3		5734.140	61.979	56.910	-6.221	68.200	5.068	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2019/06/28 - 22:52
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D	Polarity: Vertical
EUT: Aruba 500 接入點	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11 a at channel 5700MHz Ant 0 + 1	

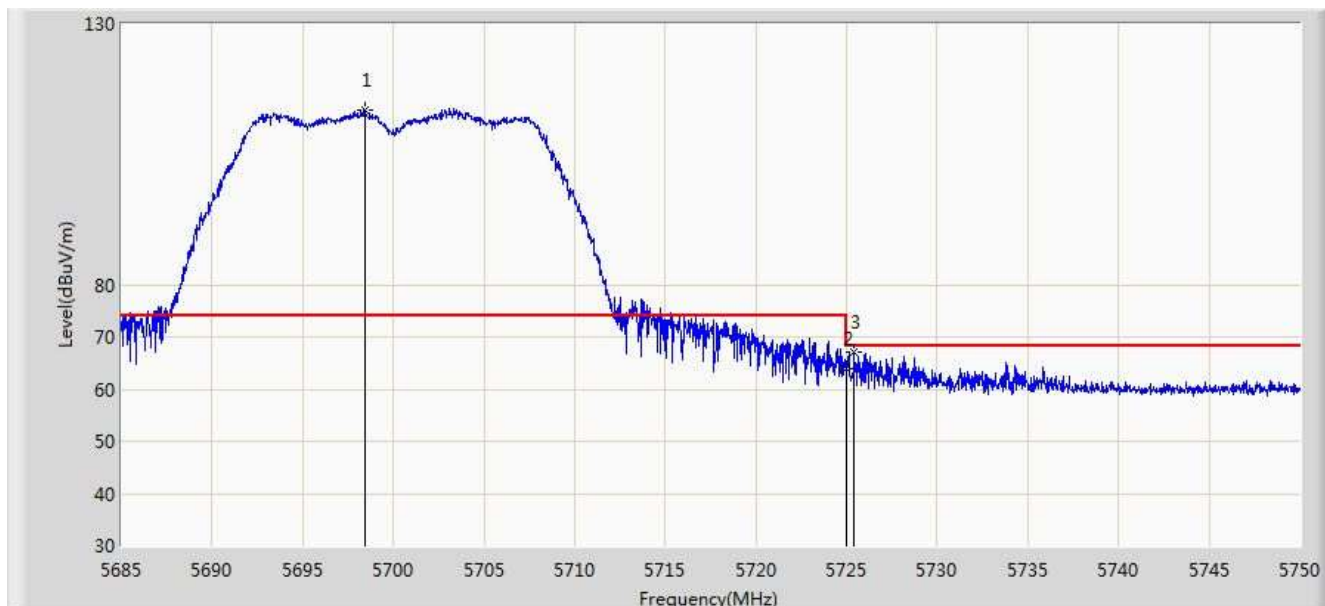


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5698.422	113.406	108.474	N/A	N/A	4.932	PK
2		5725.000	64.027	58.993	-4.173	68.200	5.034	PK
3		5725.430	67.125	62.090	-1.075	68.200	5.035	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2019/06/28 - 22:56
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D	Polarity: Horizontal
EUT: Aruba 500 接入點	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11 a at channel 5745MHz Ant 0 + 1	

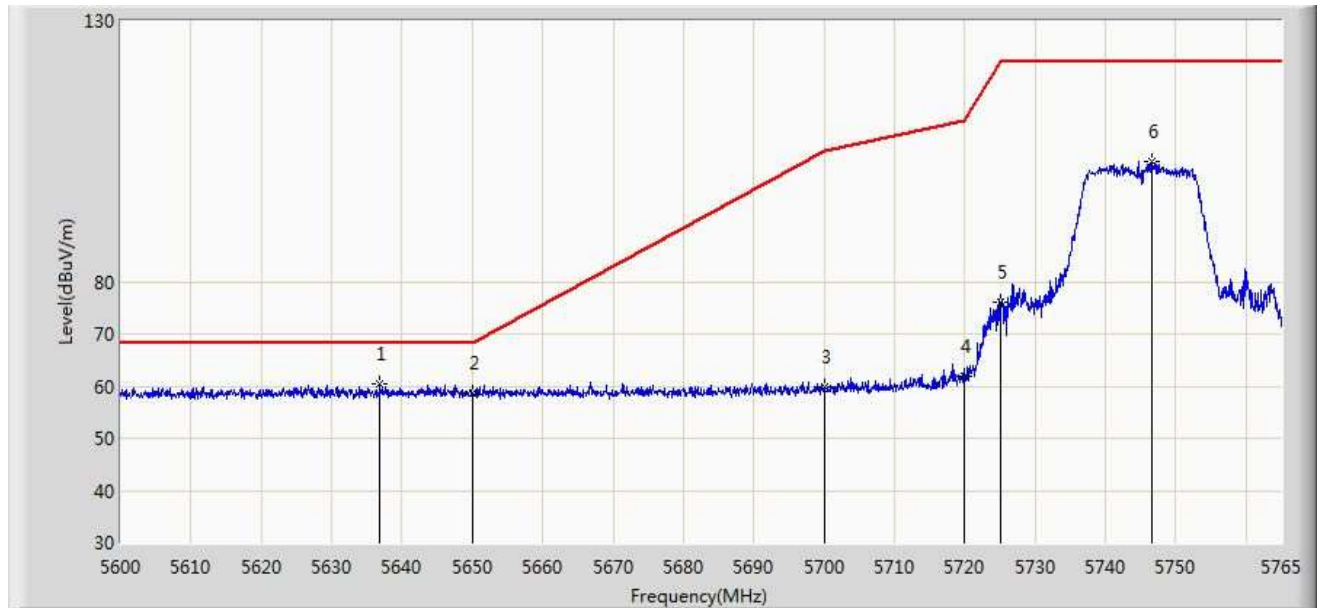


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5636.877	60.571	55.875	-7.629	68.200	4.695	PK
2		5650.000	58.787	54.041	-9.413	68.200	4.746	PK
3		5700.000	59.778	54.840	-45.422	105.200	4.938	PK
4		5720.000	62.018	57.003	-48.782	110.800	5.015	PK
5		5725.000	75.977	70.943	-46.223	122.200	5.034	PK
6		5746.685	103.047	97.930	N/A	N/A	5.117	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB) .

Site: AC1	Time: 2019/06/28 - 22:54
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D	Polarity: Vertical
EUT: Aruba 500 接入點	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11 a at channel 5745MHz Ant 0 + 1	

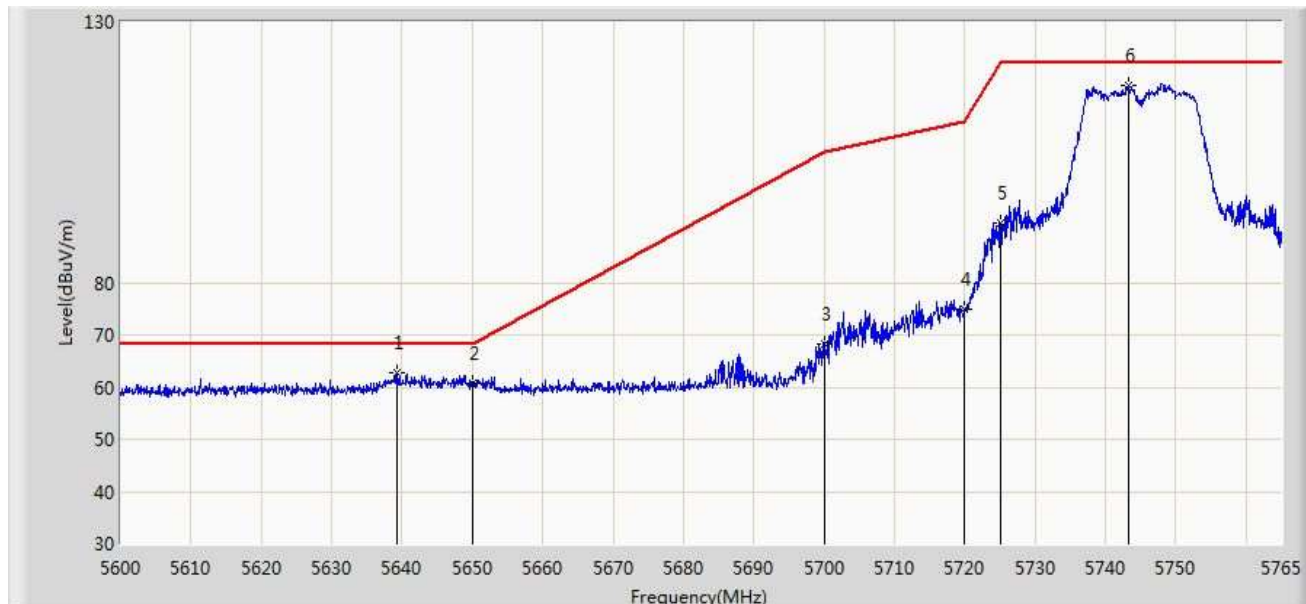


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5639.187	62.857	58.152	-5.343	68.200	4.705	PK
2		5650.000	60.859	56.113	-7.341	68.200	4.746	PK
3		5700.000	68.374	63.436	-36.826	105.200	4.938	PK
4		5720.000	74.833	69.818	-35.967	110.800	5.015	PK
5		5725.000	91.526	86.492	-30.674	122.200	5.034	PK
6	*	5743.385	117.878	112.774	N/A	N/A	5.104	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB) .

Site: AC1	Time: 2019/06/28 - 22:58
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D	Polarity: Horizontal
EUT: Aruba 500 接入點	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11 a at channel 5825MHz Ant 0 + 1	

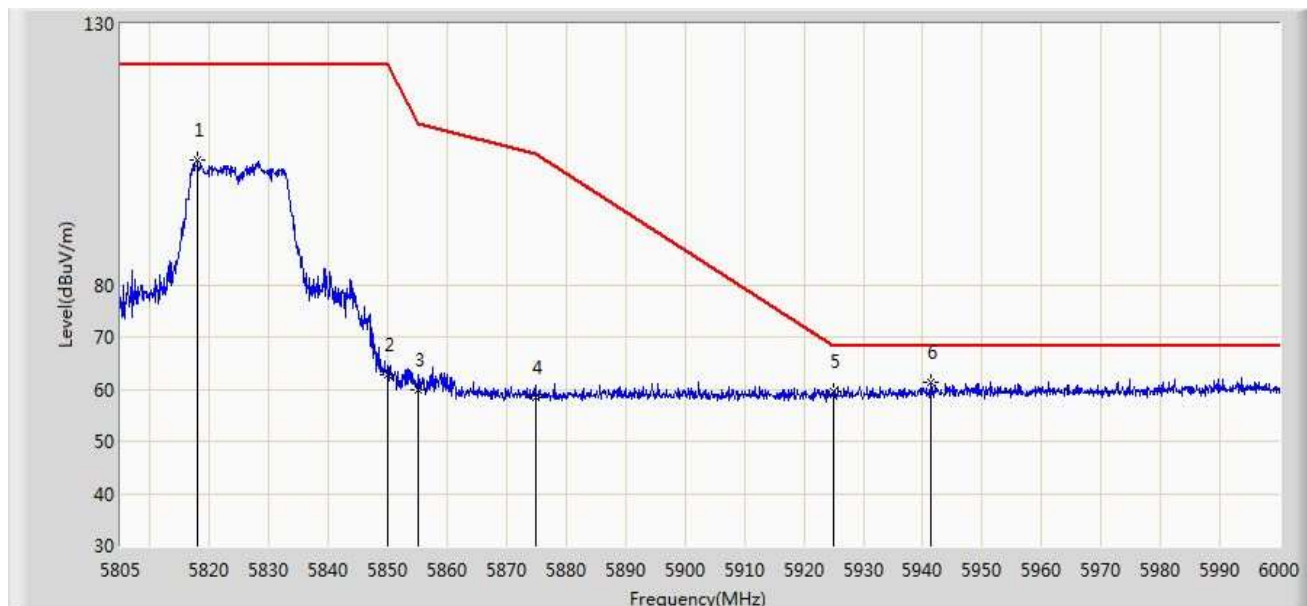


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5817.967	103.846	98.455	N/A	N/A	5.391	PK
2		5850.000	62.628	57.114	-59.572	122.200	5.514	PK
3		5855.000	59.975	54.442	-50.825	110.800	5.533	PK
4		5875.000	58.505	52.895	-46.695	105.200	5.610	PK
5		5925.000	59.459	53.657	-8.741	68.200	5.802	PK
6	*	5941.402	61.382	55.517	-6.818	68.200	5.865	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB) .

Site: AC1	Time: 2019/06/28 - 22:57
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D	Polarity: Vertical
EUT: Aruba 500 接入點	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11 a at channel 5825MHz Ant 0 + 1	

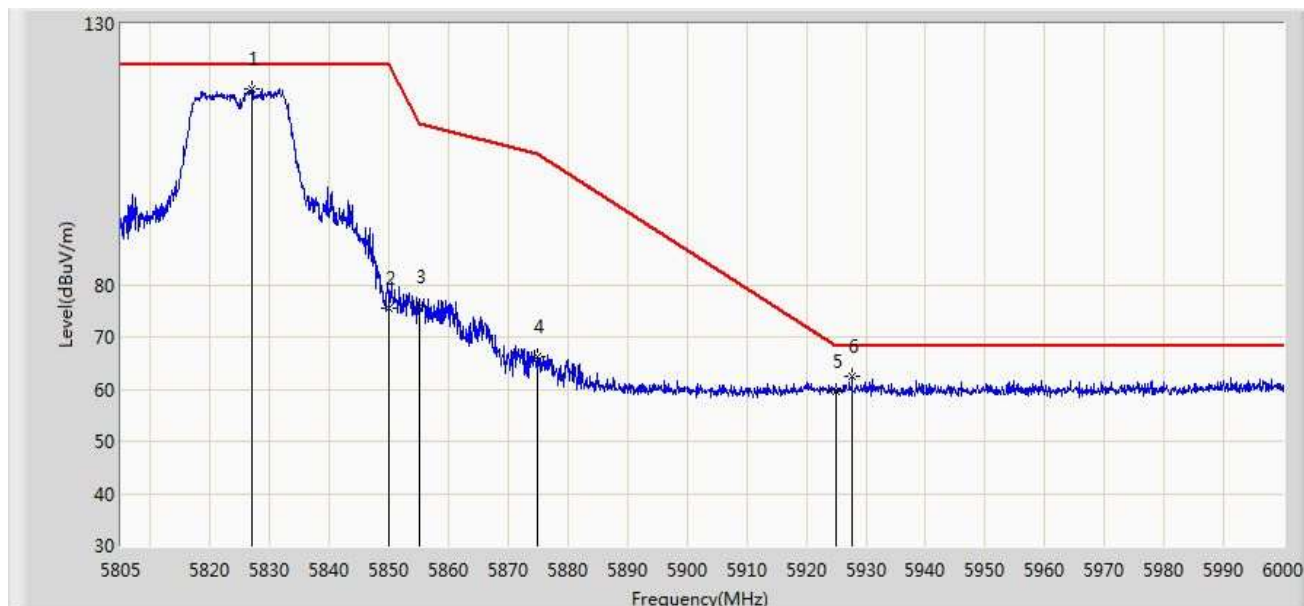


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5826.937	117.441	112.015	N/A	N/A	5.426	PK
2		5850.000	75.494	69.980	-46.706	122.200	5.514	PK
3		5855.000	75.882	70.349	-34.918	110.800	5.533	PK
4		5875.000	66.272	60.662	-38.928	105.200	5.610	PK
5		5925.000	59.500	53.698	-8.700	68.200	5.802	PK
6		5927.655	62.436	56.624	-5.764	68.200	5.812	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB) .

Site: AC1	Time: 2019/06/28 - 23:04
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D	Polarity: Horizontal
EUT: Aruba 500 接入點	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11 ac-VHT20 at channel 5180MHz Ant 0 + 1	

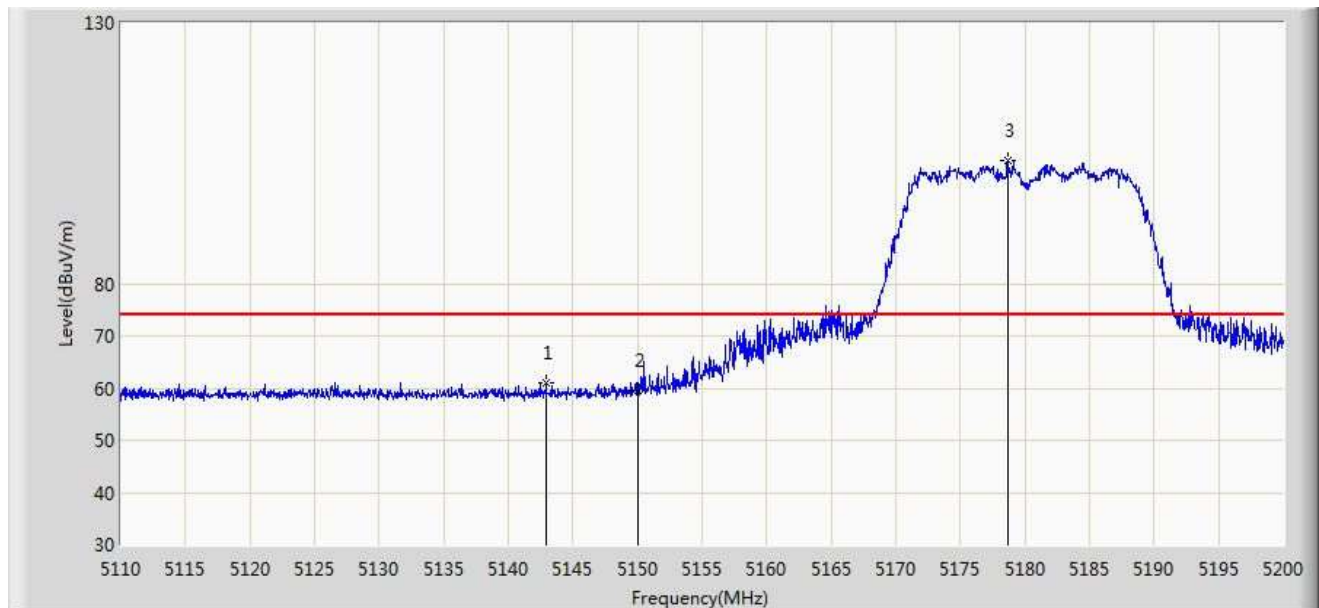


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5142.940	61.104	57.234	-12.896	74.000	3.870	PK
2		5150.000	59.710	55.834	-14.290	74.000	3.876	PK
3	*	5178.670	103.608	99.708	N/A	N/A	3.900	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2019/06/28 - 23:05
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D	Polarity: Horizontal
EUT: Aruba 500 接入點	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11 ac-VHT20 at channel 5180MHz Ant 0 + 1	

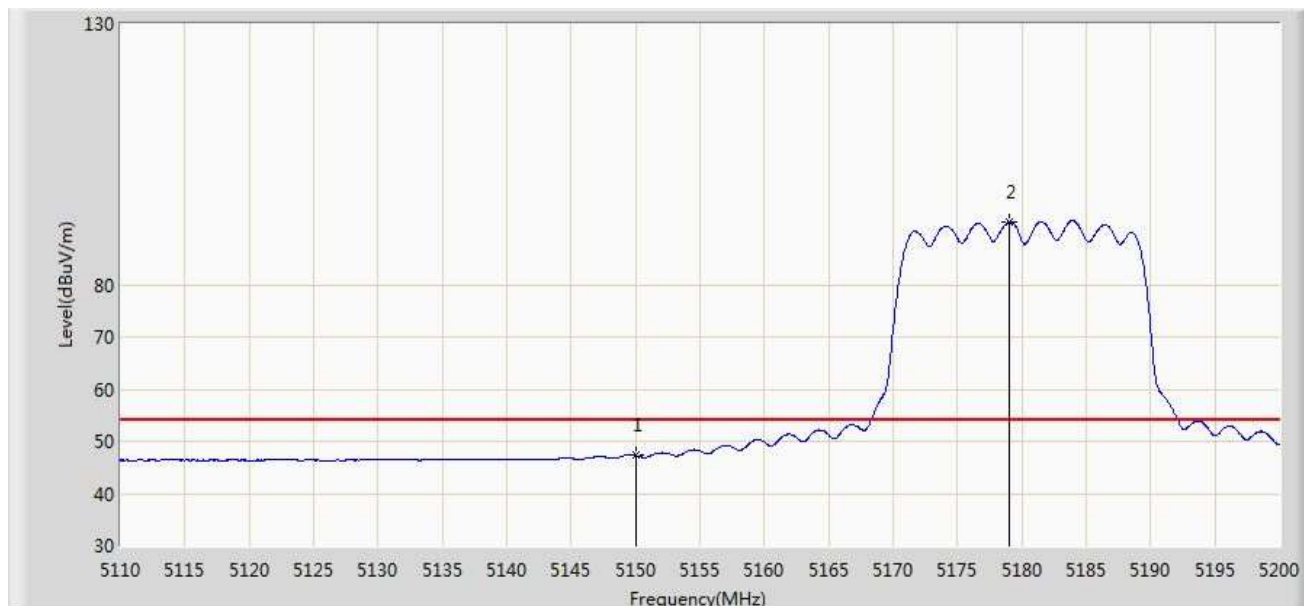

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5150.000	47.290	43.414	-6.710	54.000	3.876	AV
2	*	5178.985	91.993	88.092	N/A	N/A	3.901	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2019/06/28 - 22:59
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D	Polarity: Vertical
EUT: Aruba 500 接入點	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11 ac-VHT20 at channel 5180MHz Ant 0 + 1	




No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5142.850	73.268	69.398	-0.732	74.000	3.870	PK
2		5150.000	72.452	68.576	-1.548	74.000	3.876	PK
3	*	5185.915	116.852	112.945	N/A	N/A	3.907	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2019/06/28 - 23:03
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D	Polarity: Vertical
EUT: Aruba 500 接入點	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11 ac-VHT20 at channel 5180MHz Ant 0 + 1	

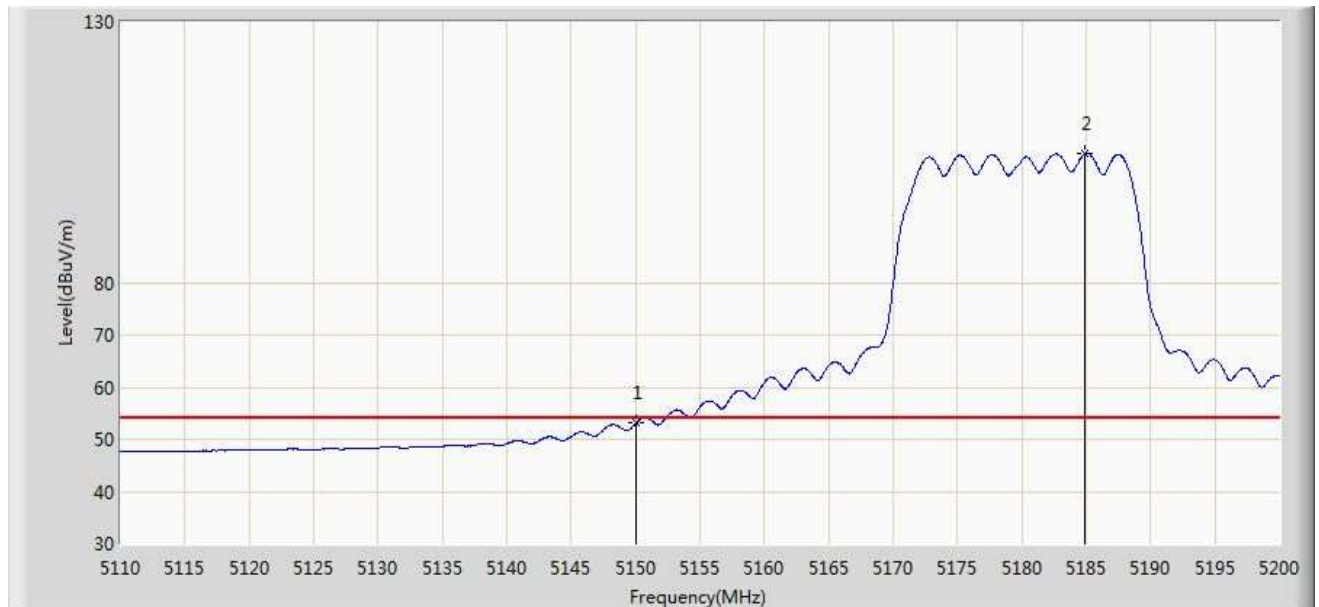


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5150.000	53.086	49.210	-0.914	54.000	3.876	AV
2	*	5184.880	104.717	100.811	N/A	N/A	3.906	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2019/06/28 - 23:08
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D	Polarity: Horizontal
EUT: Aruba 500 接入點	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11 ac-HT20 at channel 5320MHz Ant 0 + 1	

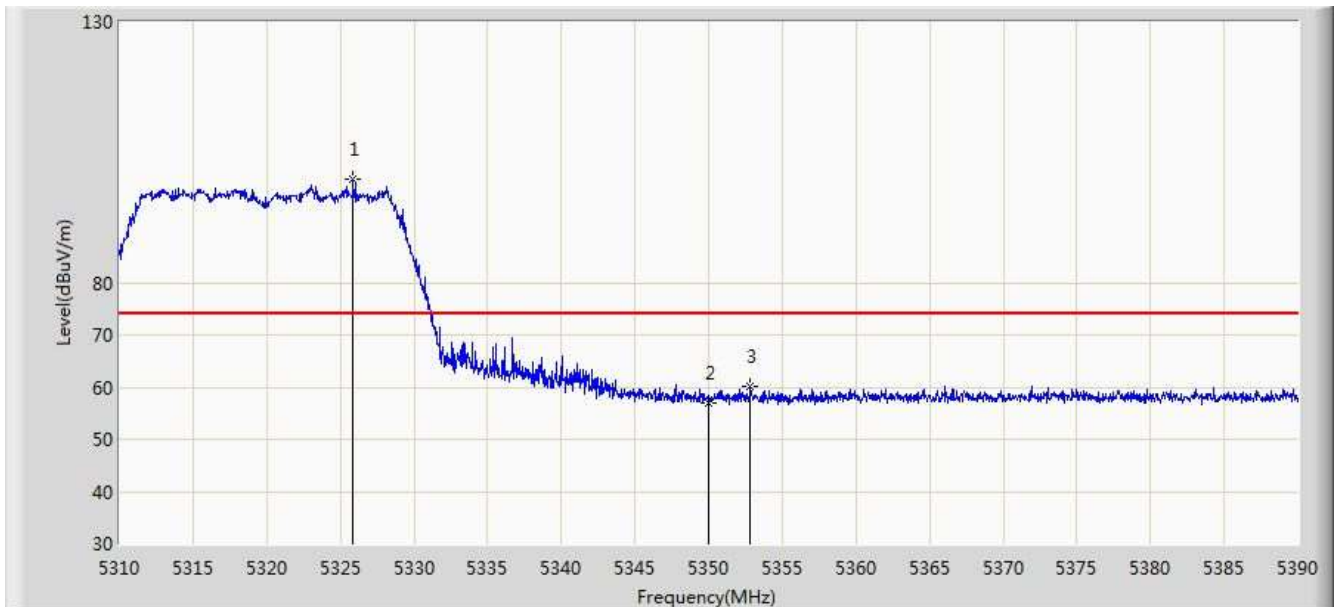


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5325.840	99.886	95.862	N/A	N/A	4.024	PK
2		5350.000	56.936	52.892	-17.064	74.000	4.044	PK
3		5352.840	60.067	56.020	-13.933	74.000	4.047	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2019/06/28 - 23:09
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D	Polarity: Horizontal
EUT: Aruba 500 接入點	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11 ac-HT20 at channel 5320MHz Ant 0 + 1	

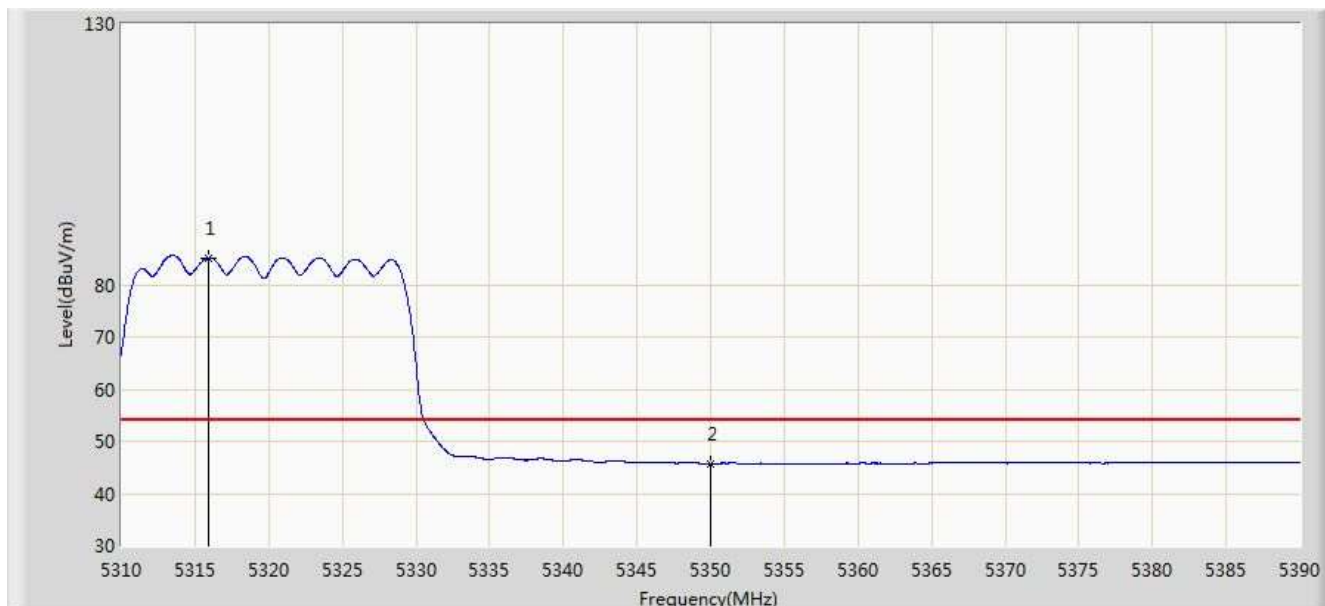


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5315.920	85.188	81.173	N/A	N/A	4.015	AV
2		5350.000	45.690	41.646	-8.310	54.000	4.044	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2019/06/28 - 23:06
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D	Polarity: Vertical
EUT: Aruba 500 接入點	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11 ac-HT20 at channel 5320MHz Ant 0 + 1	

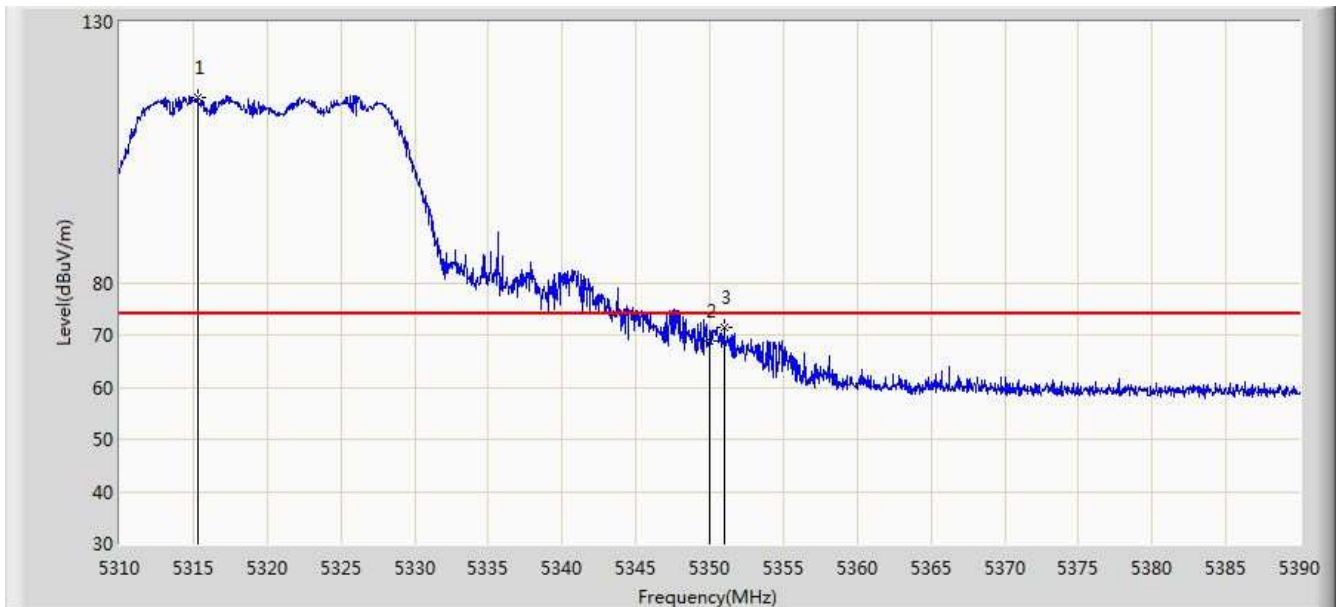


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5315.280	115.577	111.562	N/A	N/A	4.015	PK
2		5350.000	68.799	64.755	-5.201	74.000	4.044	PK
3		5350.960	71.389	67.344	-2.611	74.000	4.045	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2019/06/28 - 23:07
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D	Polarity: Vertical
EUT: Aruba 500 接入點	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11 ac-HT20 at channel 5320MHz Ant 0 + 1	

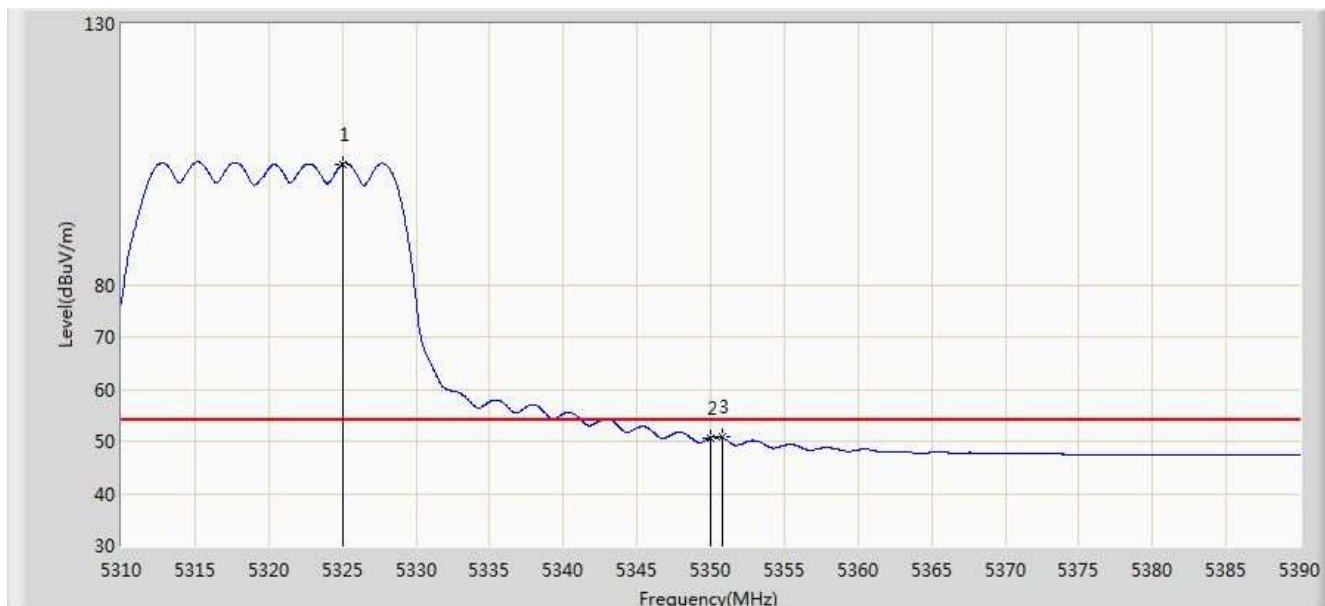


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5325.040	103.174	99.151	N/A	N/A	4.023	AV
2		5350.000	50.717	46.673	-3.283	54.000	4.044	AV
3		5350.760	50.746	46.701	-3.254	54.000	4.045	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2019/06/28 - 23:13
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D	Polarity: Horizontal
EUT: Aruba 500 接入點	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11 ac-HT20 at channel 5500MHz Ant 0 + 1	

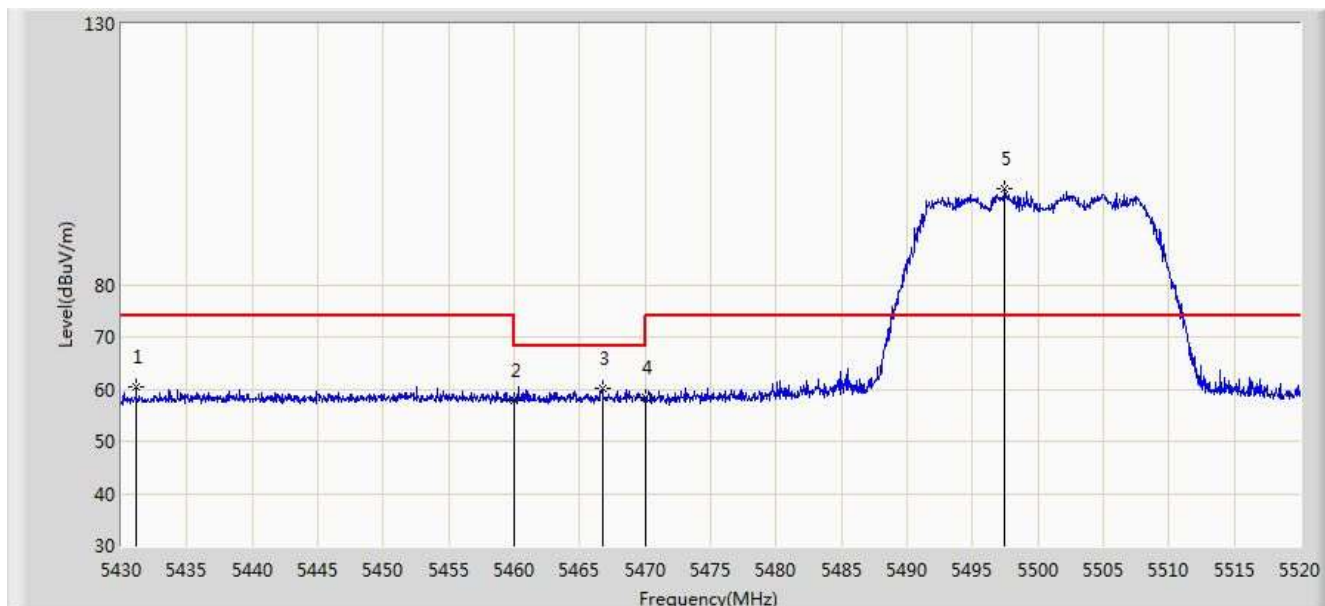


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5431.125	60.327	56.215	-13.673	74.000	4.112	PK
2		5460.000	57.955	53.819	-16.045	74.000	4.136	PK
3		5466.720	60.266	56.124	-7.934	68.200	4.142	PK
4		5470.000	58.462	54.318	-9.738	68.200	4.144	PK
5	*	5497.455	98.488	94.311	N/A	N/A	4.177	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2019/06/28 - 23:15
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D	Polarity: Horizontal
EUT: Aruba 500 接入點	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11 ac-HT20 at channel 5500MHz Ant 0 + 1	

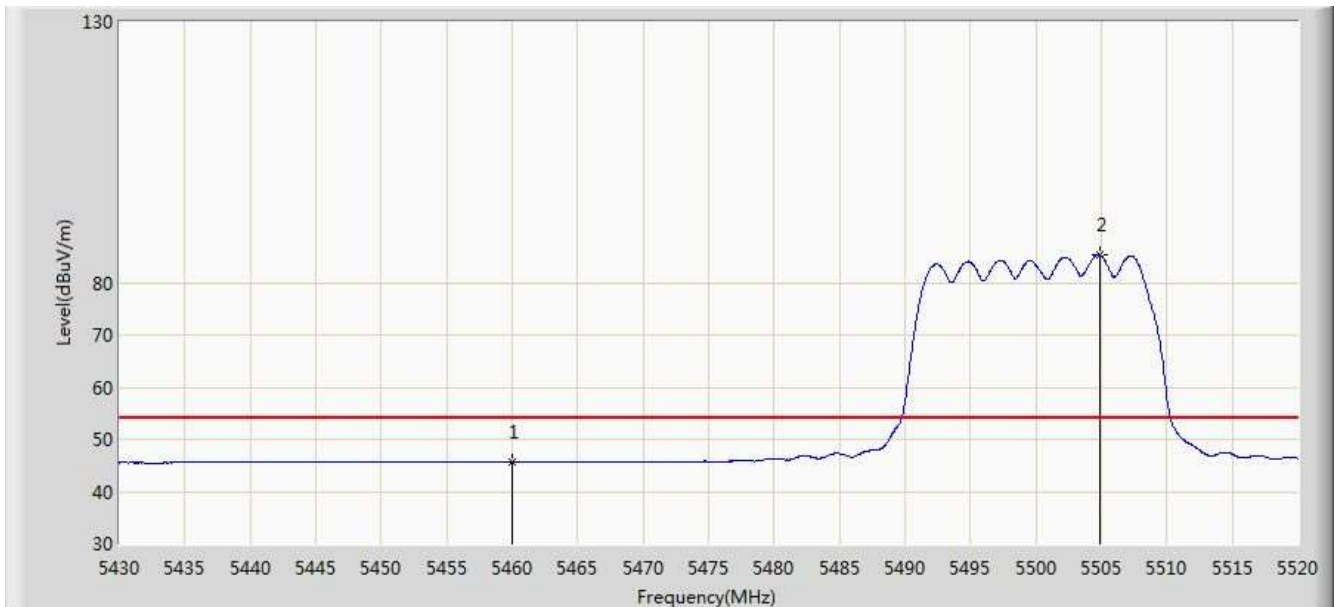


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5460.000	45.685	41.549	-8.315	54.000	4.136	AV
2	*	5504.835	85.293	81.104	N/A	N/A	4.189	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2019/06/28 - 23:12
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D	Polarity: Vertical
EUT: Aruba 500 接入點	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11 ac-HT20 at channel 5500MHz Ant 0 + 1	

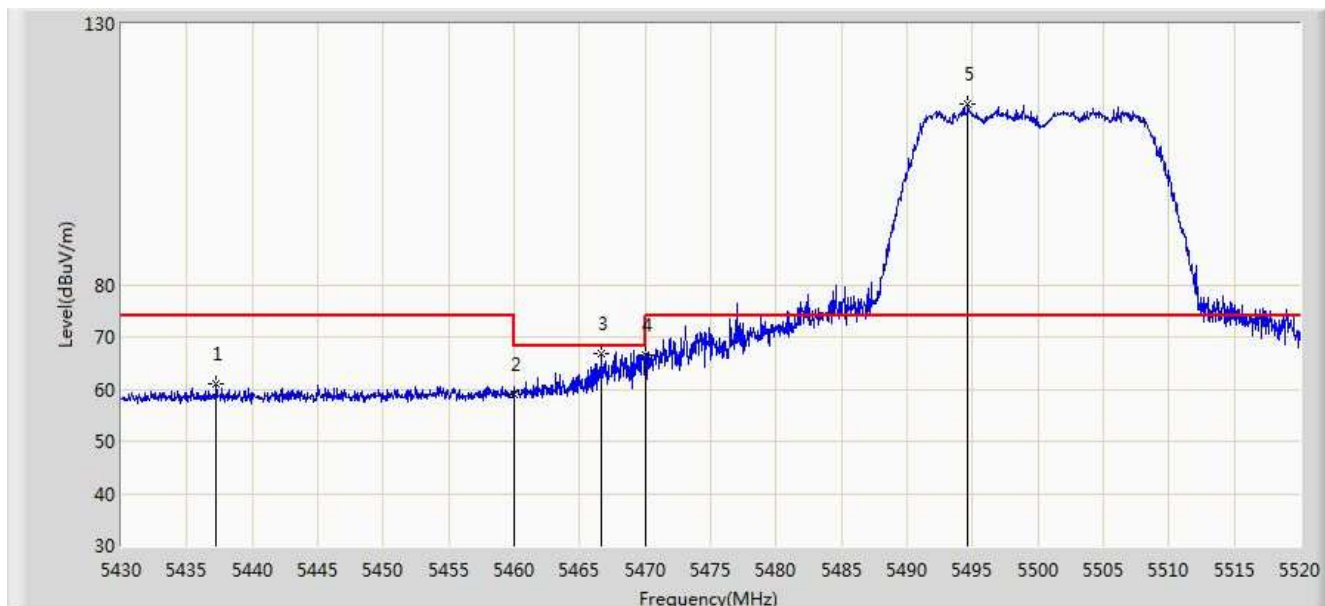

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5437.245	60.921	56.804	-13.079	74.000	4.117	PK
2		5460.000	58.956	54.820	-15.044	74.000	4.136	PK
3		5466.675	66.868	62.726	-1.332	68.200	4.142	PK
4		5470.000	66.494	62.350	-1.706	68.200	4.144	PK
5	*	5494.665	114.519	110.347	N/A	N/A	4.171	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2019/06/28 - 23:13
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D	Polarity: Vertical
EUT: Aruba 500 接入點	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11 ac-HT20 at channel 5500MHz Ant 0 + 1	




No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5460.000	47.718	43.582	-6.282	54.000	4.136	AV
2	*	5499.255	102.531	98.351	N/A	N/A	4.180	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2019/06/28 - 23:18
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D	Polarity: Horizontal
EUT: Aruba 500 接入點	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11 ac-HT20 at channel 5700MHz Ant 0 + 1	

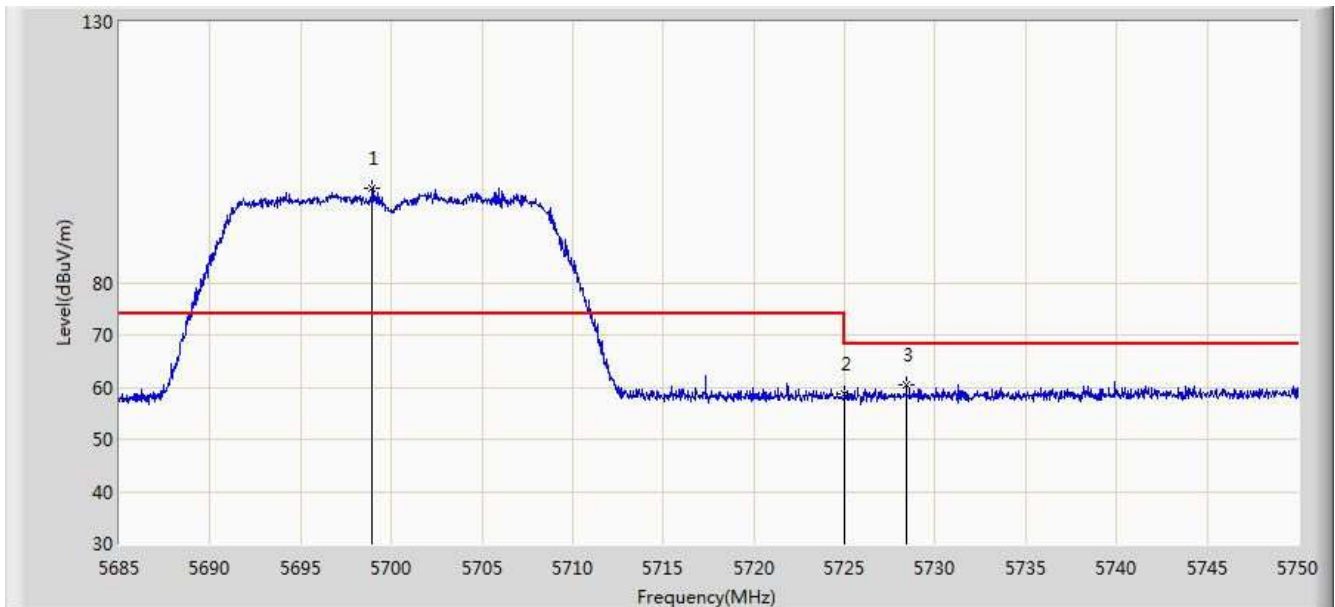


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5698.942	98.245	93.311	N/A	N/A	4.934	PK
2		5725.000	58.826	53.792	-9.374	68.200	5.034	PK
3		5728.420	60.525	55.478	-7.675	68.200	5.047	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2019/06/28 - 23:16
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D	Polarity: Vertical
EUT: Aruba 500 接入點	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11 ac-HT20 at channel 5700MHz Ant 0 + 1	

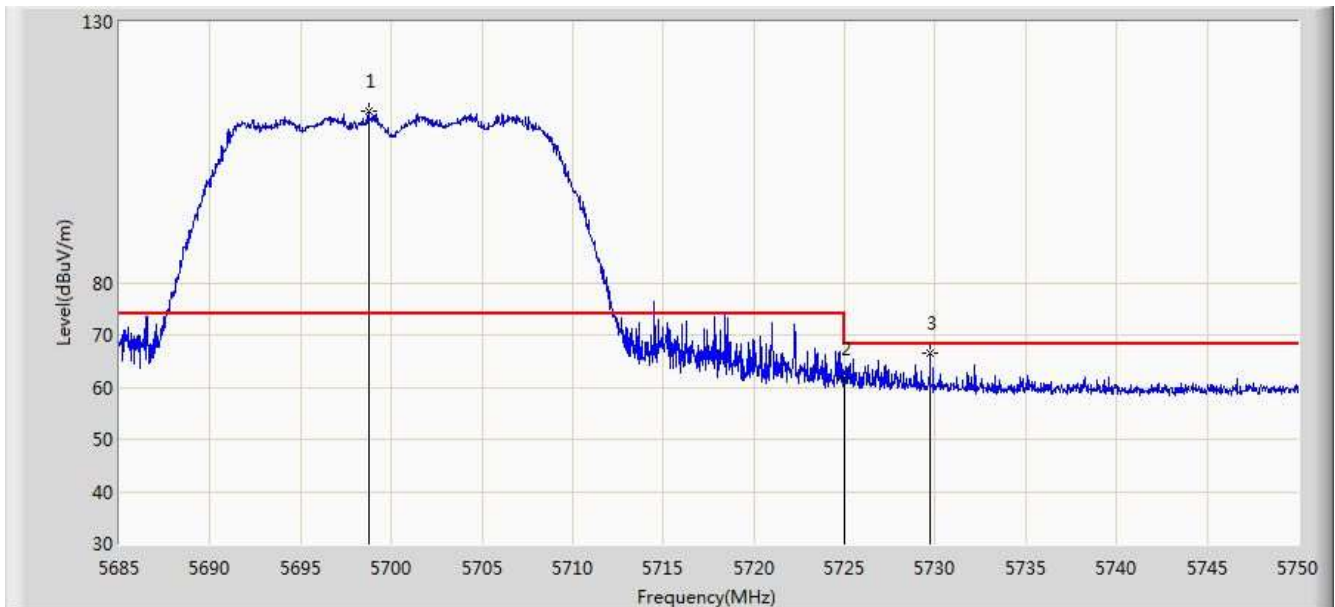


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5698.748	112.908	107.975	N/A	N/A	4.933	PK
2		5725.000	61.495	56.461	-6.705	68.200	5.034	PK
3		5729.720	66.423	61.371	-1.777	68.200	5.053	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2019/06/28 - 23:20
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D	Polarity: Horizontal
EUT: Aruba 500 接入點	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11 ac-VHT20 at channel 5745MHz Ant 0 + 1	

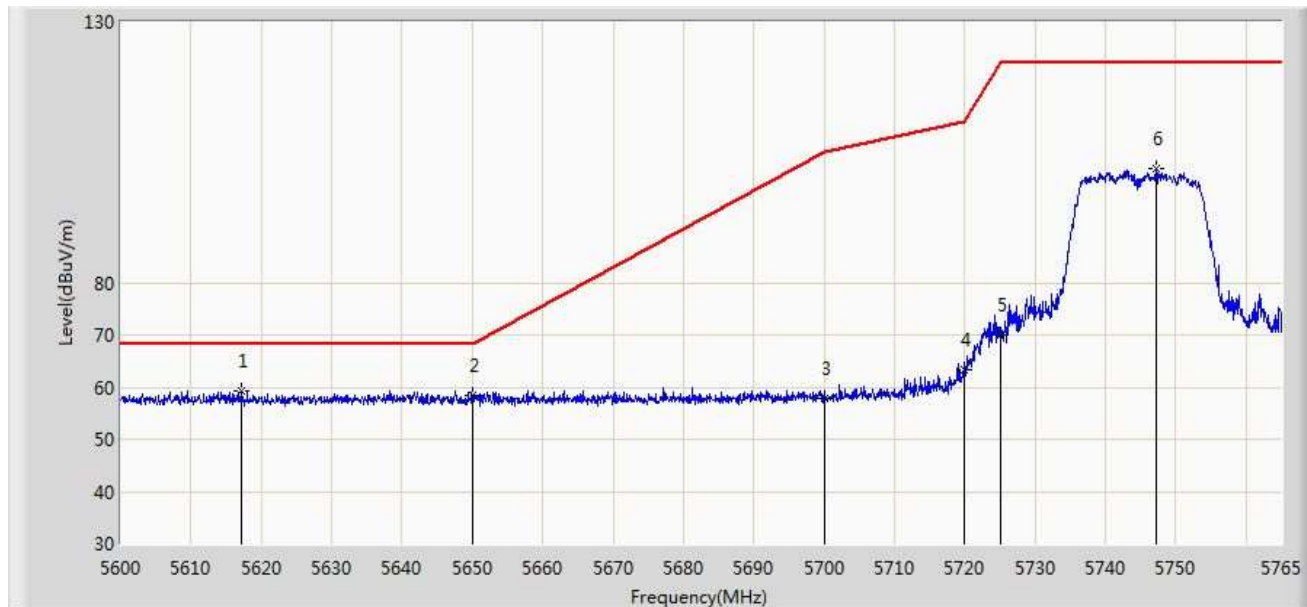


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5617.078	59.412	54.793	-8.788	68.200	4.619	PK
2		5650.000	58.340	53.594	-9.860	68.200	4.746	PK
3		5700.000	57.735	52.797	-47.465	105.200	4.938	PK
4		5720.000	63.361	58.346	-47.439	110.800	5.015	PK
5		5725.000	69.911	64.877	-52.289	122.200	5.034	PK
6		5747.263	101.929	96.810	N/A	N/A	5.119	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB) .

Site: AC1	Time: 2019/06/28 - 23:19
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D	Polarity: Vertical
EUT: Aruba 500 接入點	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11 ac-VHT20 at channel 5745MHz Ant 0 + 1	

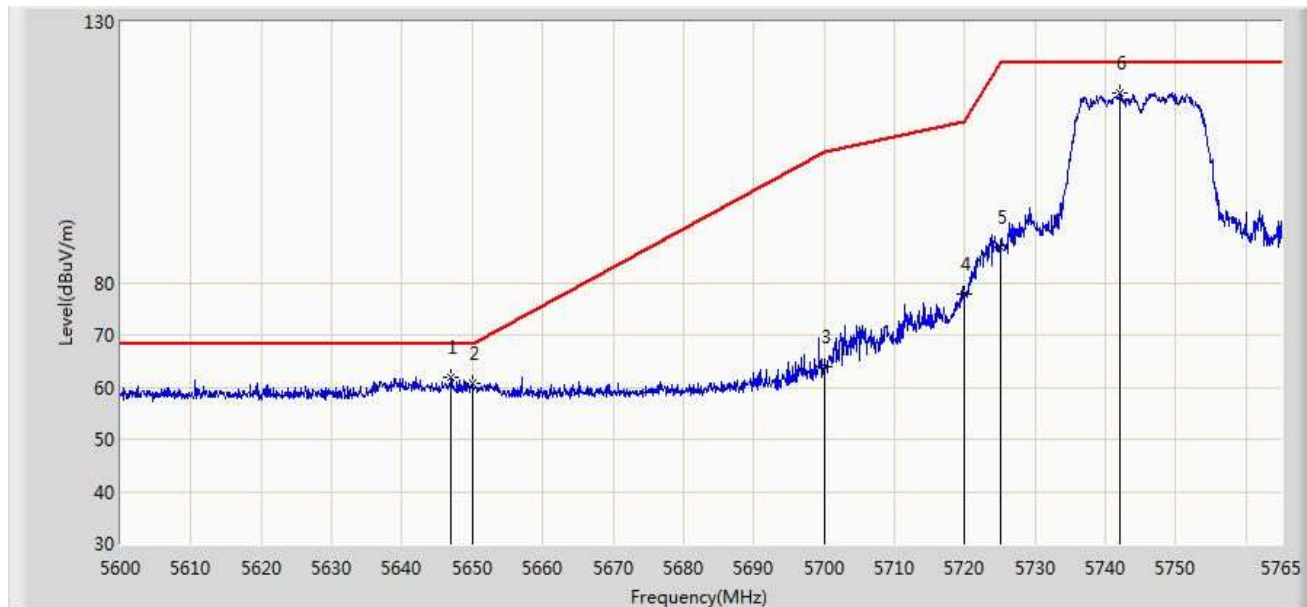


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5646.942	61.900	57.165	-6.300	68.200	4.734	PK
2		5650.000	60.792	56.046	-7.408	68.200	4.746	PK
3		5700.000	63.829	58.891	-41.371	105.200	4.938	PK
4		5720.000	77.777	72.762	-33.023	110.800	5.015	PK
5		5725.000	86.841	81.807	-35.359	122.200	5.034	PK
6	*	5742.147	116.341	111.241	N/A	N/A	5.099	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB) .

Site: AC1	Time: 2019/06/28 - 23:23
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D	Polarity: Horizontal
EUT: Aruba 500 接入點	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11 ac-VHT20 at channel 5825MHz Ant 0 + 1	

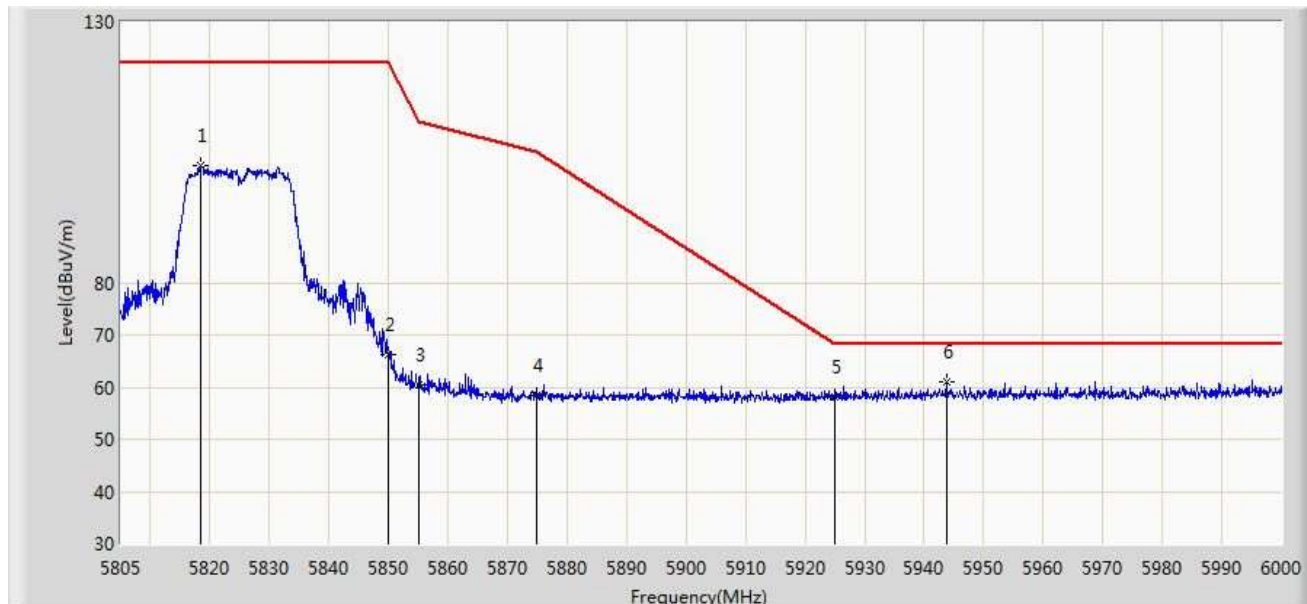


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5818.553	102.321	96.928	N/A	N/A	5.393	PK
2		5850.000	66.202	60.688	-55.998	122.200	5.514	PK
3		5855.000	60.312	54.779	-50.488	110.800	5.533	PK
4		5875.000	58.439	52.829	-46.761	105.200	5.610	PK
5		5925.000	58.073	52.271	-10.127	68.200	5.802	PK
6	*	5943.743	61.115	55.241	-7.085	68.200	5.874	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB) .

Site: AC1	Time: 2019/06/28 - 23:21
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D	Polarity: Vertical
EUT: Aruba 500 接入點	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11 ac-VHT20 at channel 5825MHz Ant 0 + 1	

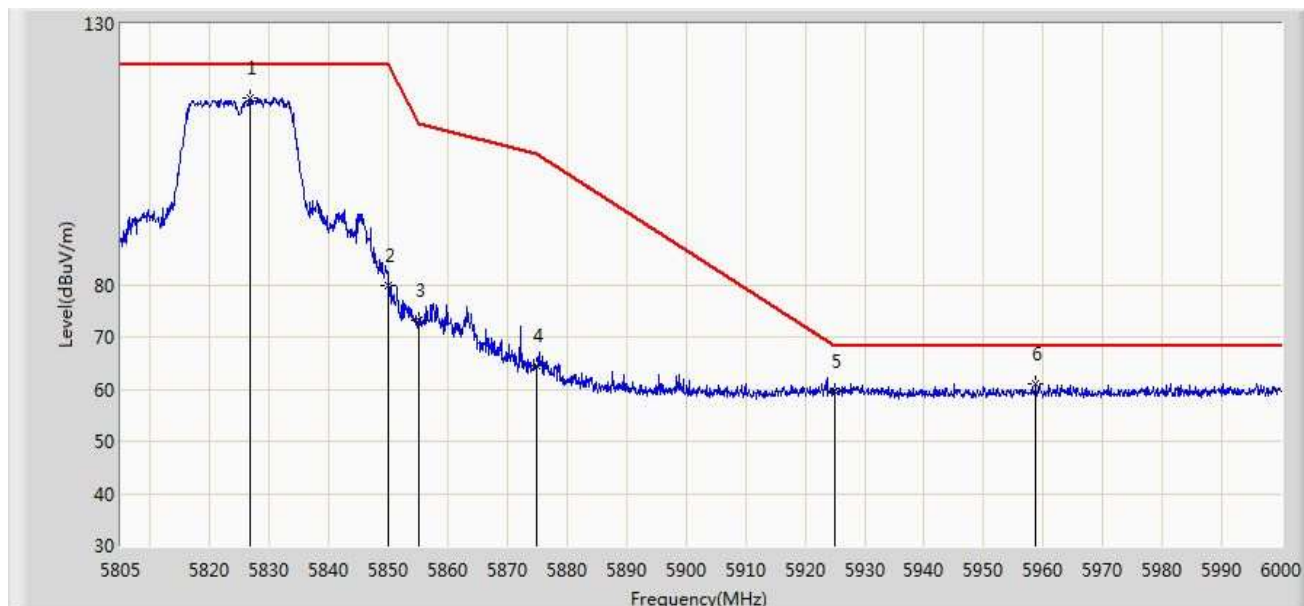


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5826.840	115.786	110.361	N/A	N/A	5.426	PK
2		5850.000	79.893	74.379	-42.307	122.200	5.514	PK
3		5855.000	73.184	67.651	-37.616	110.800	5.533	PK
4		5875.000	64.583	58.973	-40.617	105.200	5.610	PK
5		5925.000	59.664	53.862	-8.536	68.200	5.802	PK
6		5958.757	60.939	55.007	-7.261	68.200	5.933	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB) .

Site: AC1	Time: 2019/06/28 - 23:28
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D	Polarity: Horizontal
EUT: Aruba 500 接入點	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11 ac-VHT40 at channel 5190MHz Ant 0 + 1	

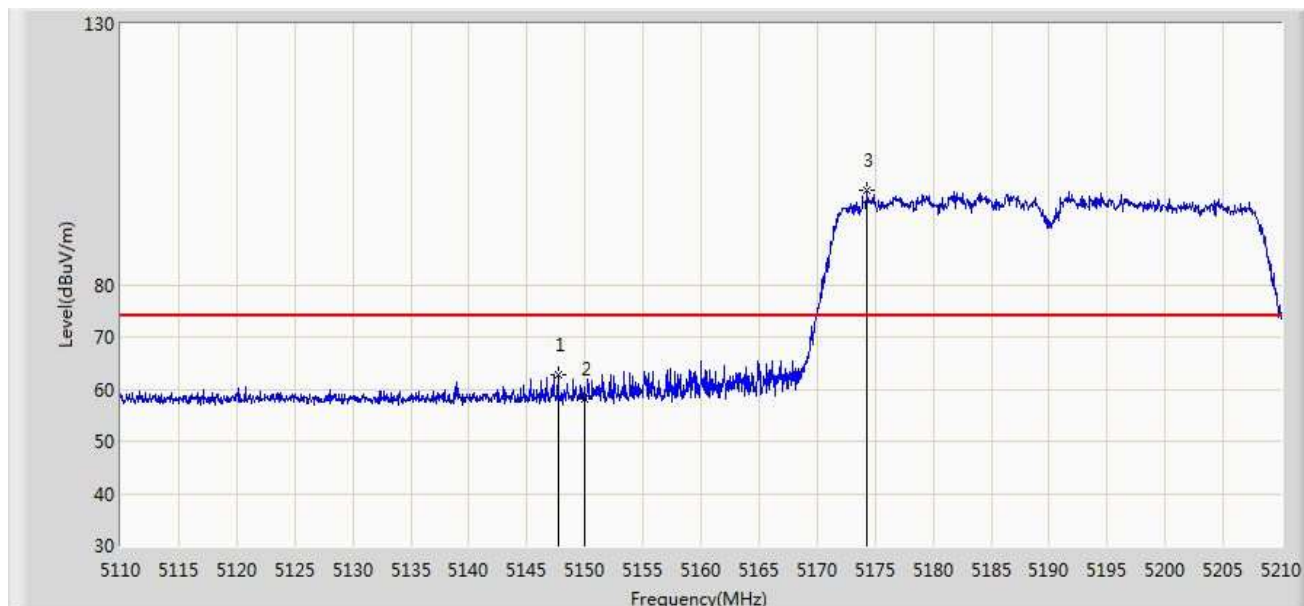


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5147.700	62.799	58.925	-11.201	74.000	3.874	PK
2		5150.000	58.241	54.365	-15.759	74.000	3.876	PK
3	*	5174.300	98.144	94.248	N/A	N/A	3.896	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2019/06/28 - 23:29
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D	Polarity: Horizontal
EUT: Aruba 500 接入點	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11 ac-VHT40 at channel 5190MHz Ant 0 + 1	

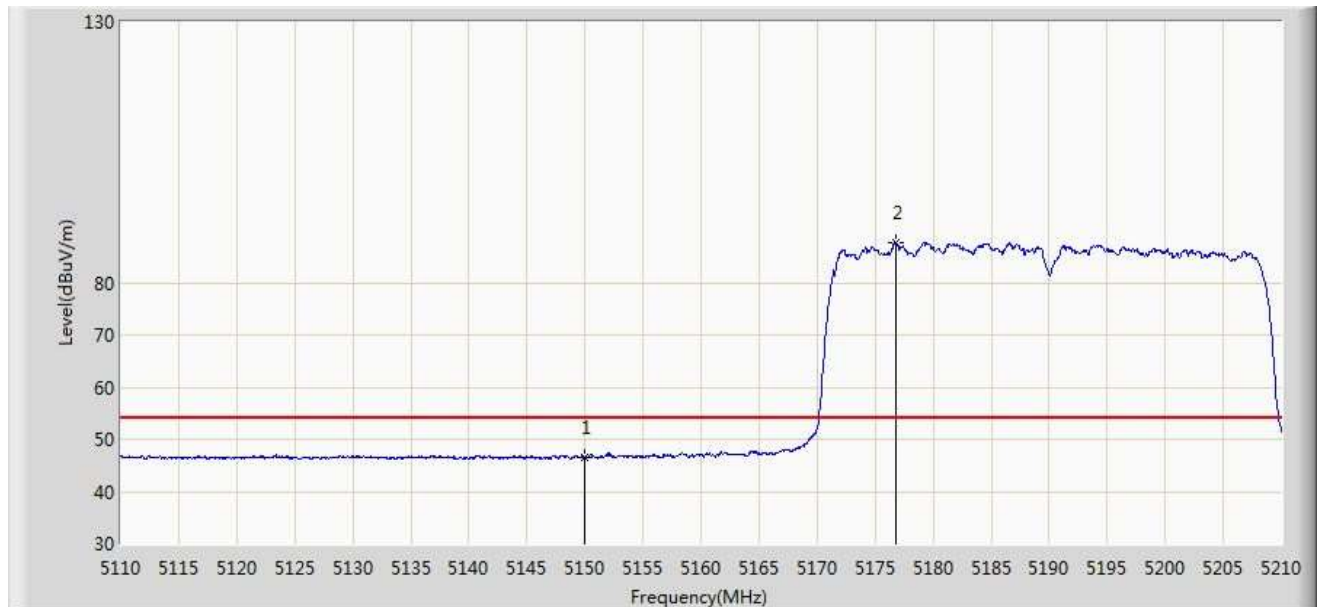


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5150.000	46.494	42.618	-7.506	54.000	3.876	AV
2	*	5176.800	87.599	83.700	N/A	N/A	3.899	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2019/06/28 - 23:26
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D	Polarity: Vertical
EUT: Aruba 500 接入點	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11 ac-VHT40 at channel 5190MHz Ant 0 + 1	

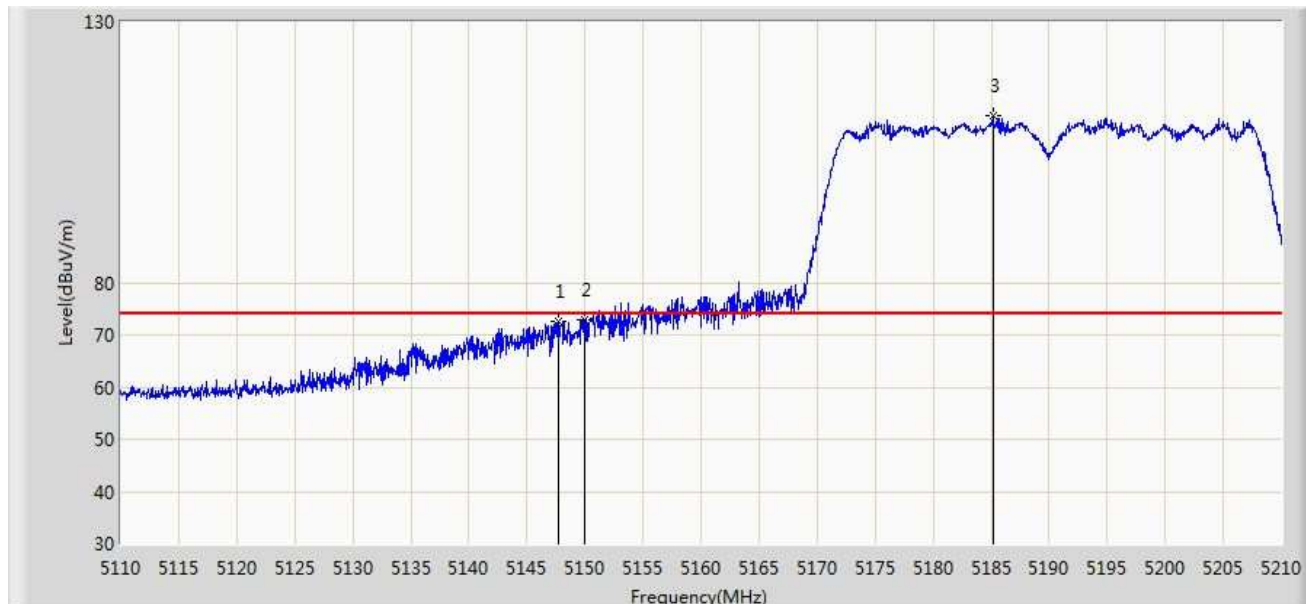


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5147.700	72.720	68.846	-1.280	74.000	3.874	PK
2		5150.000	72.775	68.899	-1.225	74.000	3.876	PK
3	*	5185.200	112.149	108.243	N/A	N/A	3.906	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2019/06/28 - 23:27
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D	Polarity: Vertical
EUT: Aruba 500 接入點	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11 ac-VHT40 at channel 5190MHz Ant 0 + 1	

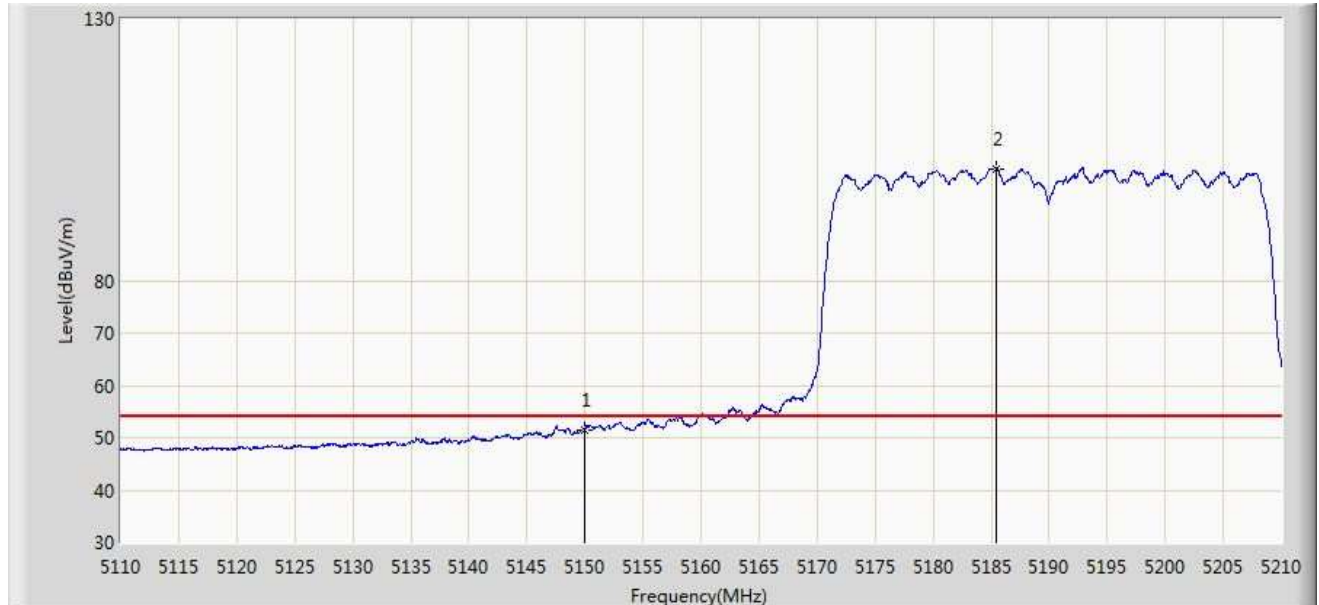


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5150.000	51.571	47.695	-2.429	54.000	3.876	AV
2	*	5185.400	101.391	97.485	N/A	N/A	3.906	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2019/06/29 - 03:37
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D	Polarity: Horizontal
EUT: Aruba 500 接入點	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11 ac-HT40 at channel 5310MHz Ant 0 + 1	

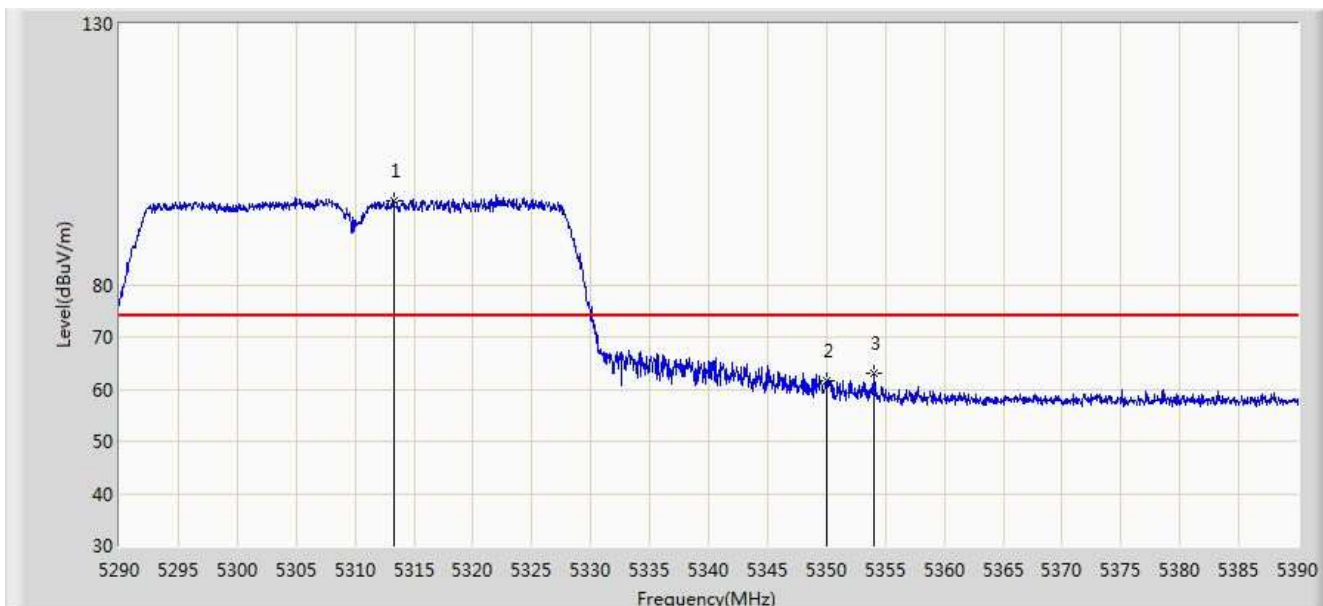


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5313.250	96.071	92.058	N/A	N/A	4.013	PK
2		5350.000	61.708	57.664	-12.292	74.000	4.044	PK
3		5354.050	63.086	59.038	-10.914	74.000	4.048	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2019/06/29 - 03:38
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D	Polarity: Horizontal
EUT: Aruba 500 接入點	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11 ac-HT40 at channel 5310MHz Ant 0 + 1	

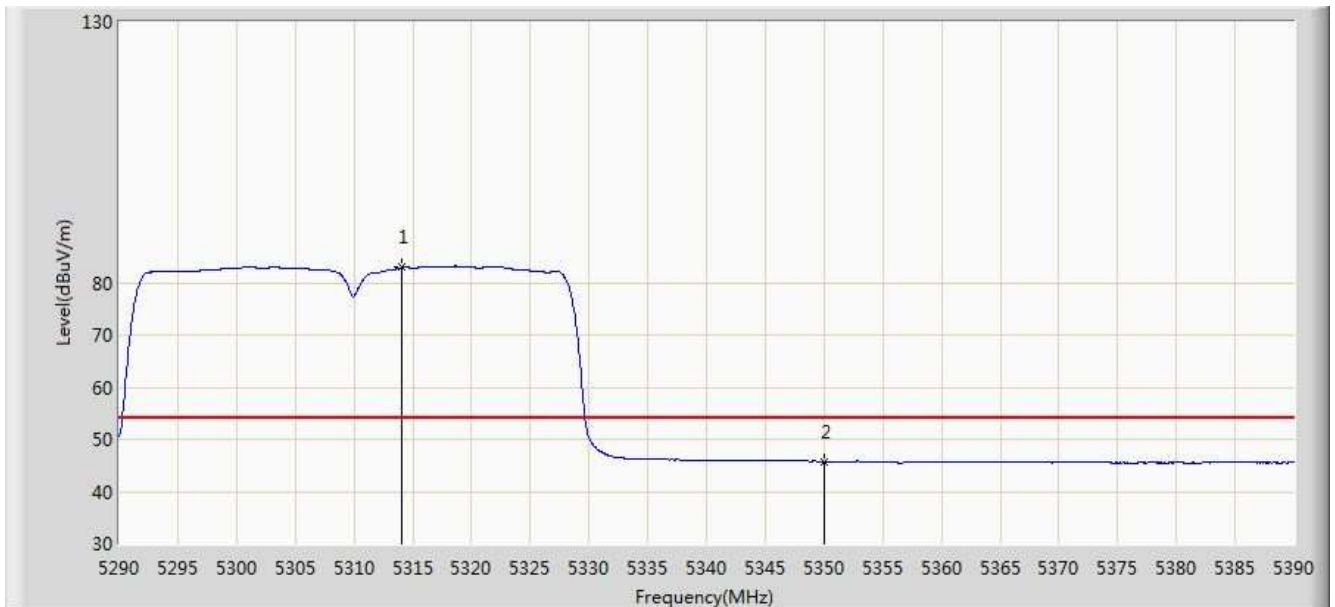


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5314.050	82.959	78.945	N/A	N/A	4.014	AV
2		5350.000	45.744	41.700	-8.256	54.000	4.044	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2019/06/29 - 03:32
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D	Polarity: Vertical
EUT: Aruba 500 接入點	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11 ac-HT40 at channel 5310MHz Ant 0 + 1	

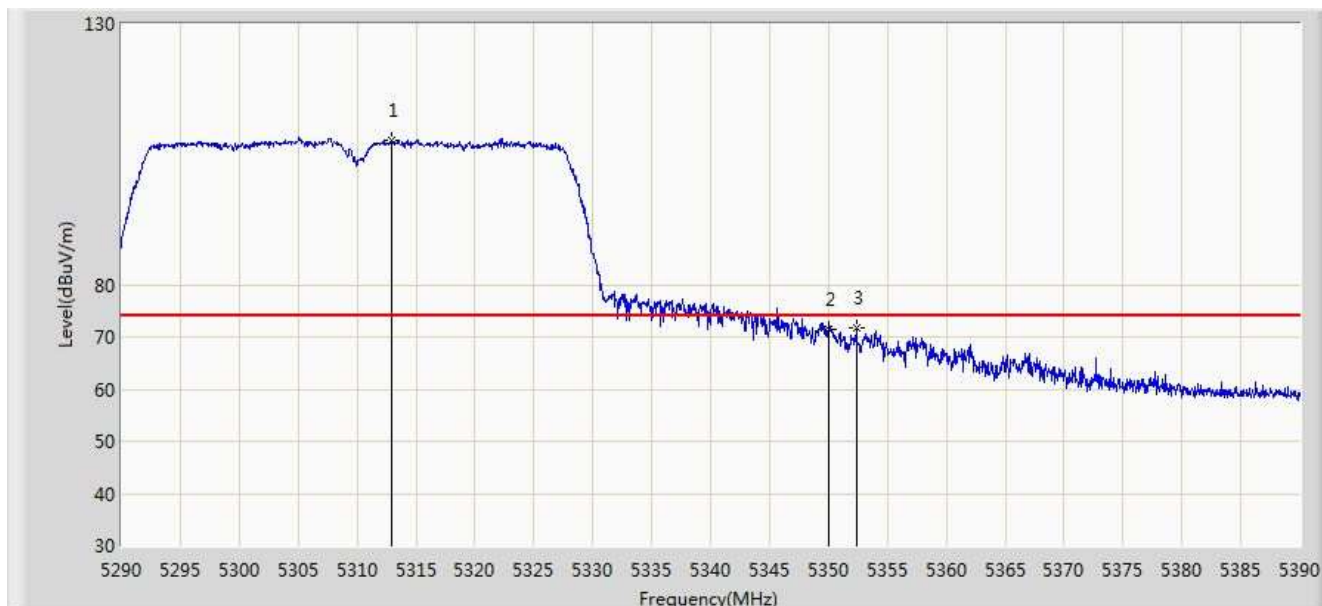


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5312.900	107.563	103.550	N/A	N/A	4.013	PK
2		5350.000	71.578	67.534	-2.422	74.000	4.044	PK
3		5352.350	71.729	67.683	-2.271	74.000	4.046	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2019/06/29 - 03:36
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D	Polarity: Vertical
EUT: Aruba 500 接入點	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11 ac-HT40 at channel 5310MHz Ant 0 + 1	

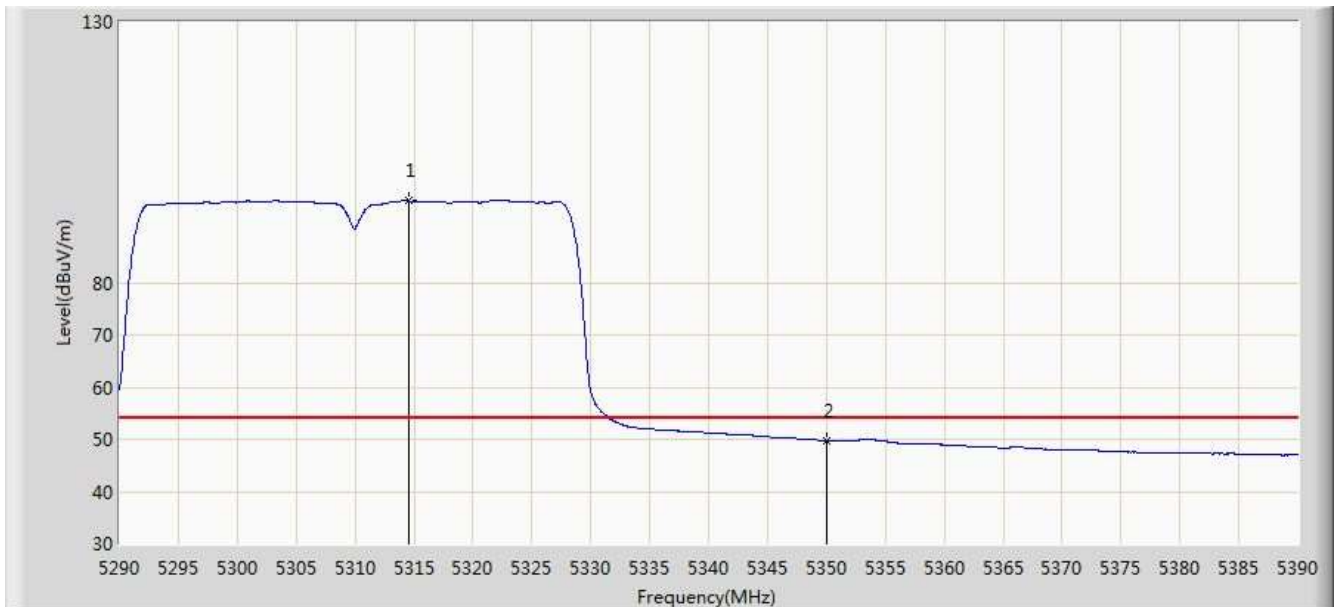


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5314.500	95.687	91.673	N/A	N/A	4.014	AV
2		5350.000	49.737	45.693	-4.263	54.000	4.044	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2019/06/29 - 03:45
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D	Polarity: Horizontal
EUT: Aruba 500 接入點	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11 ac-HT40 at channel 5510MHz Ant 0 + 1	

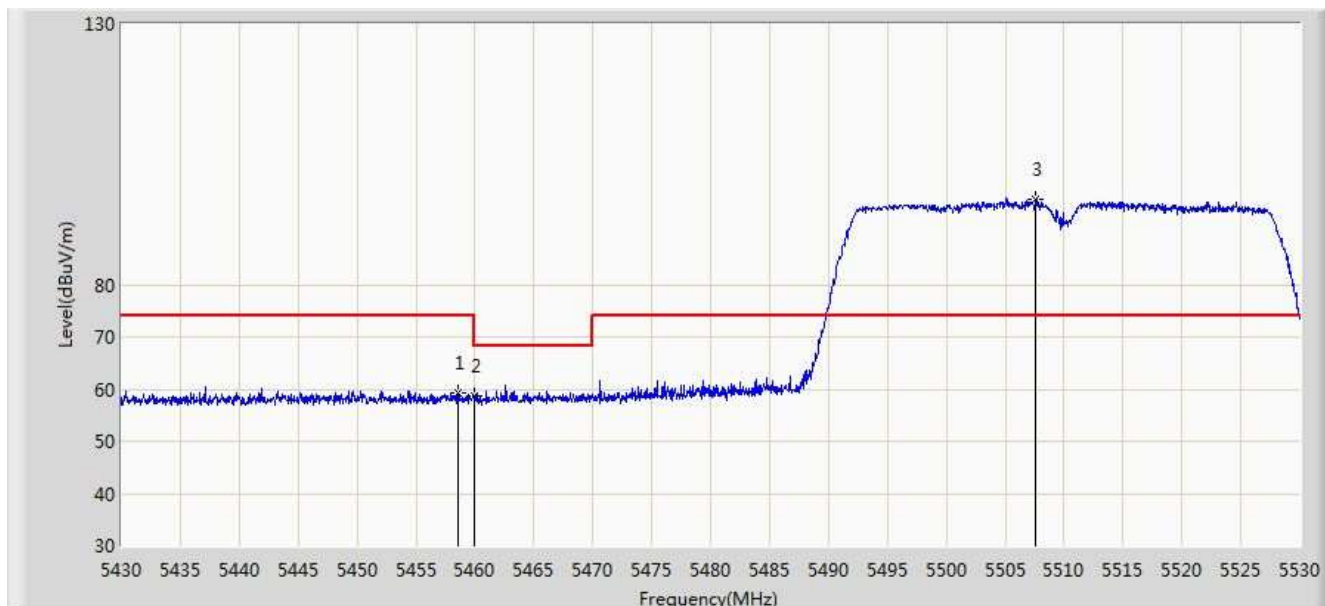


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5458.600	59.381	55.246	-14.619	74.000	4.135	PK
2		5460.000	58.666	54.530	-15.334	74.000	4.136	PK
3	*	5507.600	96.343	92.144	N/A	N/A	4.200	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2019/06/29 - 03:46
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D	Polarity: Horizontal
EUT: Aruba 500 接入點	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11 ac-HT40 at channel 5510MHz Ant 0 + 1	

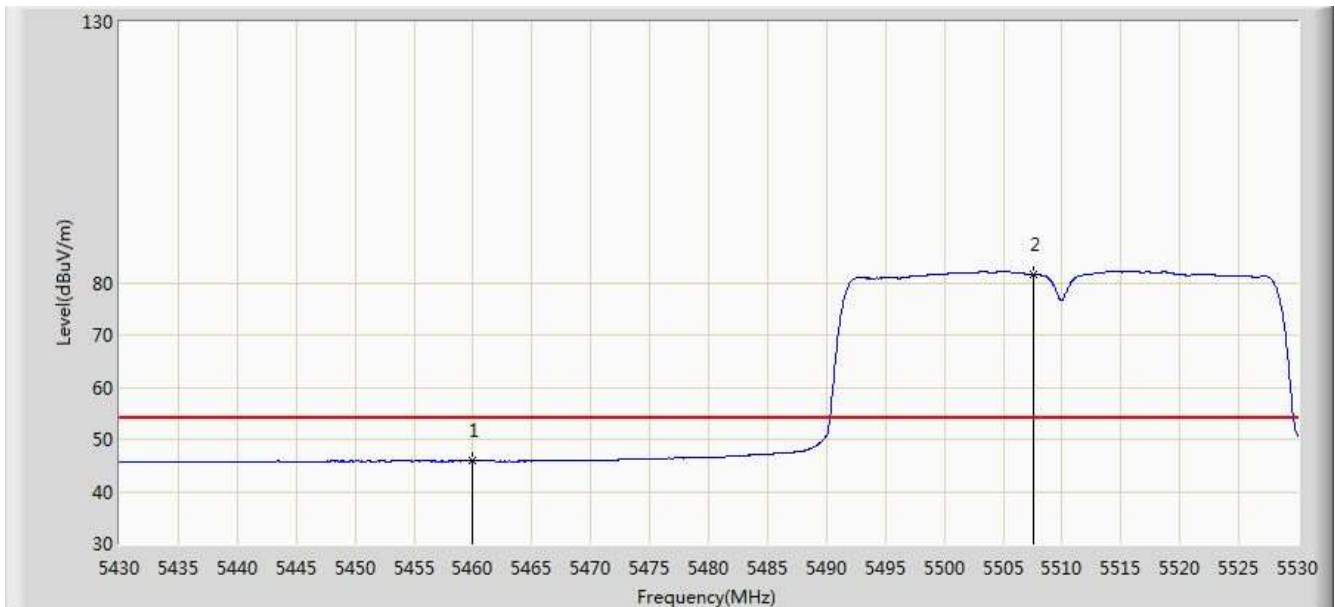


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5460.000	45.843	41.707	-8.157	54.000	4.136	AV
2	*	5507.600	81.714	77.515	N/A	N/A	4.200	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2019/06/29 - 03:43
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D	Polarity: Vertical
EUT: Aruba 500 接入點	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11 ac-HT40 at channel 5510MHz Ant 0 + 1	

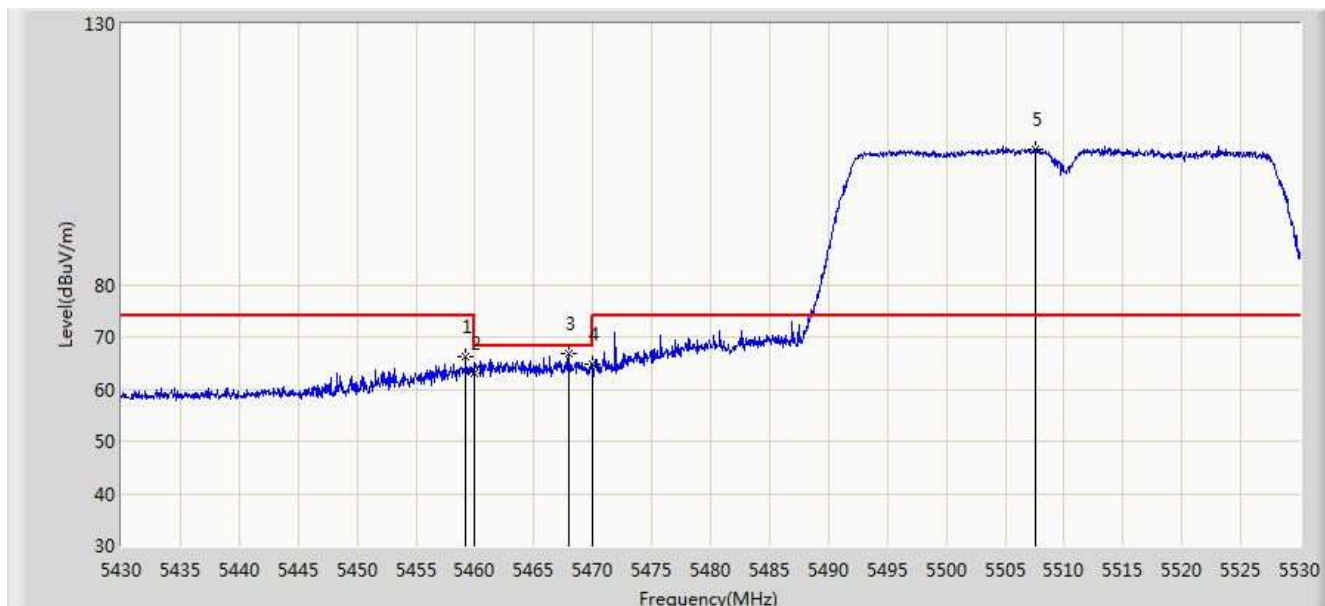


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5459.200	66.110	61.975	-7.890	74.000	4.135	PK
2		5460.000	63.118	58.982	-10.882	74.000	4.136	PK
3		5467.950	66.874	62.731	-1.326	68.200	4.143	PK
4		5470.000	64.667	60.523	-3.533	68.200	4.144	PK
5	*	5507.550	105.828	101.629	N/A	N/A	4.200	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2019/06/29 - 03:45
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D	Polarity: Vertical
EUT: Aruba 500 接入點	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11 ac-HT40 at channel 5510MHz Ant 0 + 1	

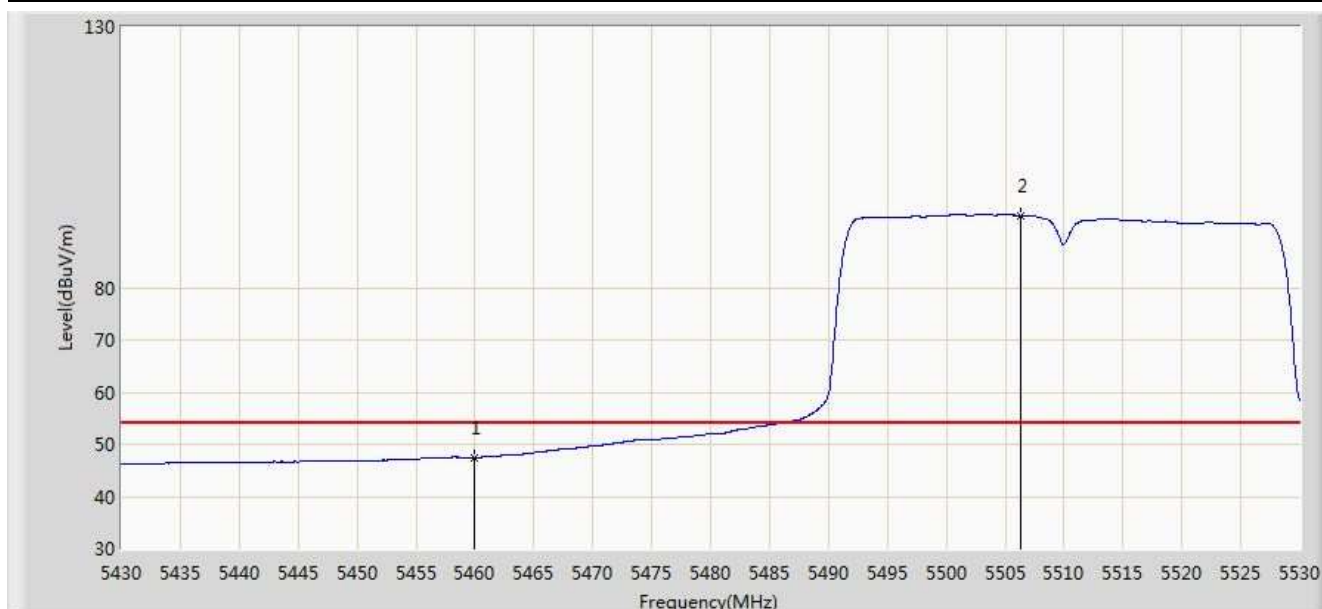


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5460.000	47.489	43.353	-6.511	54.000	4.136	AV
2	*	5506.300	93.821	89.627	N/A	N/A	4.195	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2019/06/28 - 23:41
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D	Polarity: Horizontal
EUT: Aruba 500 接入點	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11 ac-HT40 at channel 5670MHz Ant 0 + 1	

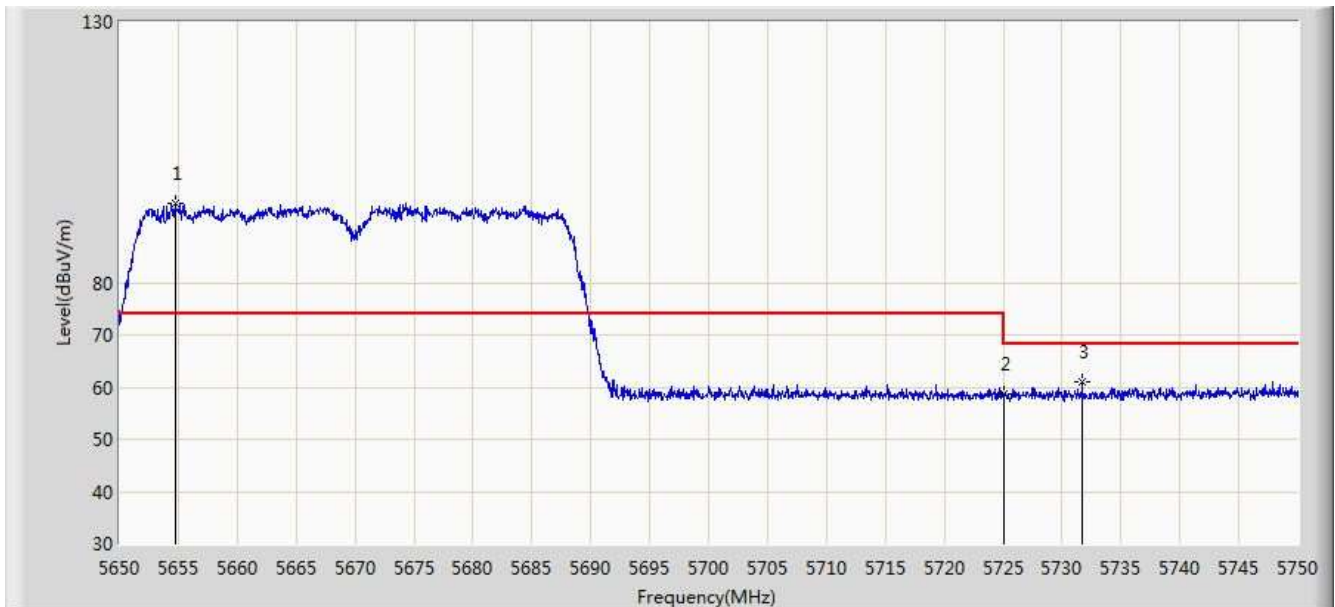


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5654.700	95.083	90.319	N/A	N/A	4.764	PK
2		5725.000	58.584	53.550	-9.616	68.200	5.034	PK
3		5731.700	60.950	55.890	-7.250	68.200	5.059	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2019/06/28 - 23:41
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D	Polarity: Vertical
EUT: Aruba 500 接入點	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11 ac-HT40 at channel 5670MHz Ant 0 + 1	

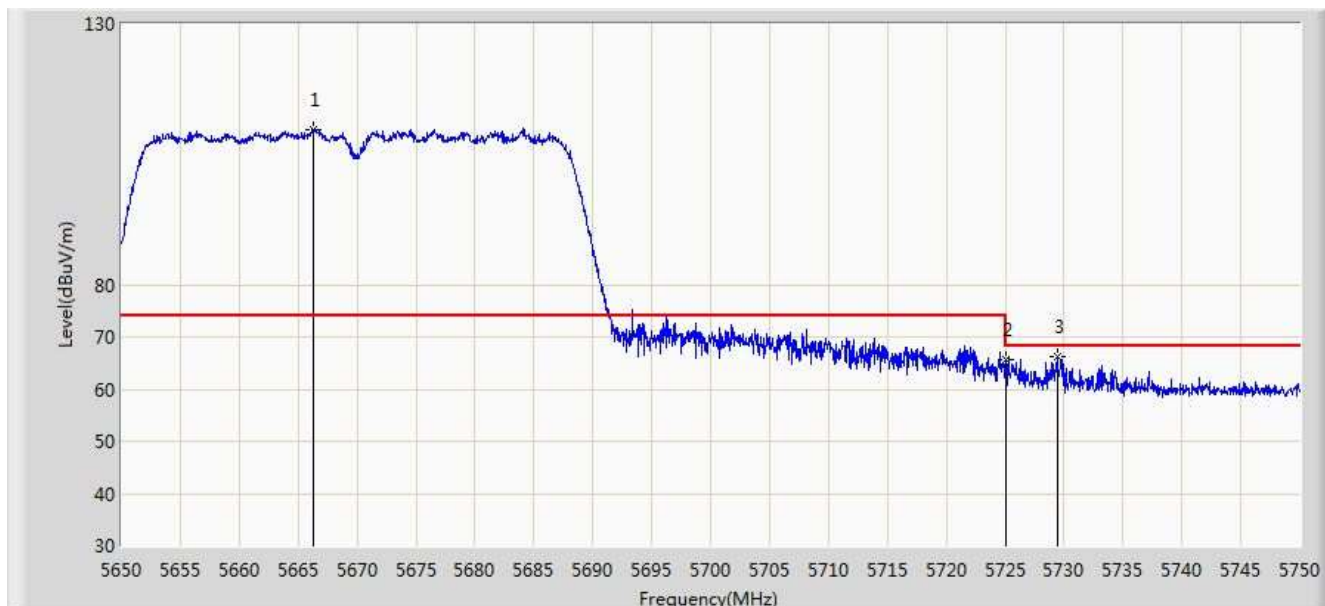


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5666.350	109.730	104.921	N/A	N/A	4.809	PK
2		5725.000	65.784	60.750	-2.416	68.200	5.034	PK
3		5729.400	66.116	61.065	-2.084	68.200	5.050	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2019/06/28 - 23:45
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D	Polarity: Horizontal
EUT: Aruba 500 接入點	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11 ac-VHT40 at channel 5755MHz Ant 0 + 1	

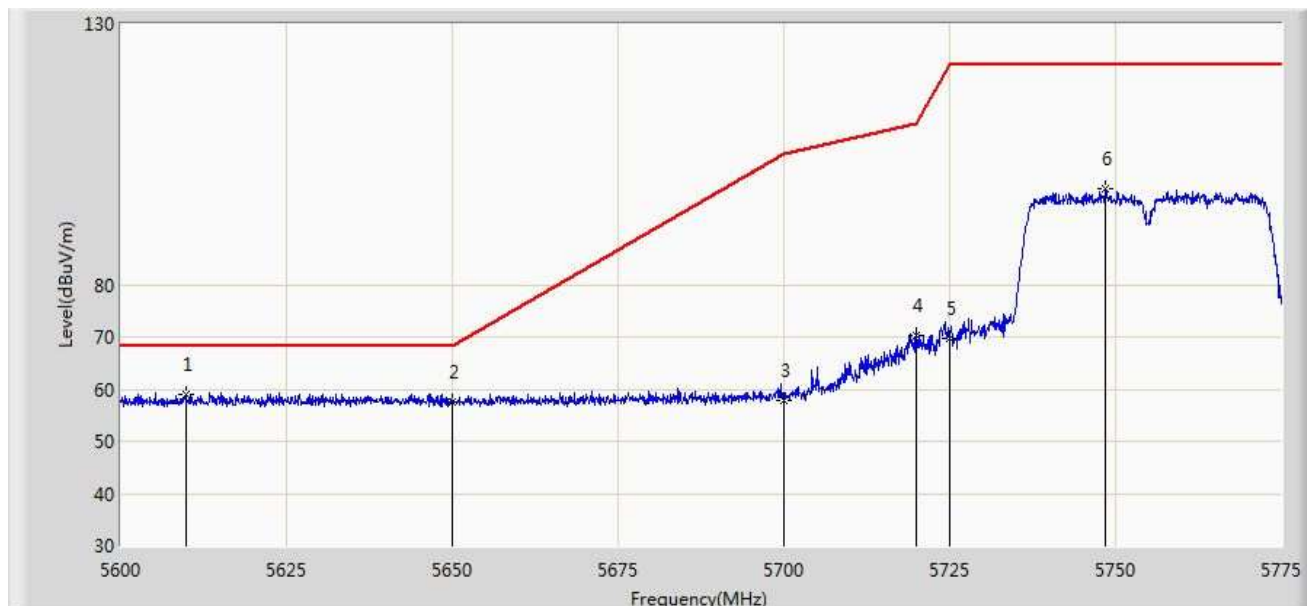


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5609.800	58.886	54.295	-9.314	68.200	4.591	PK
2		5650.000	57.606	52.860	-10.594	68.200	4.746	PK
3		5700.000	57.946	53.008	-47.254	105.200	4.938	PK
4		5720.000	70.379	65.364	-40.421	110.800	5.015	PK
5		5725.000	69.672	64.638	-52.528	122.200	5.034	PK
6		5748.487	98.520	93.396	N/A	N/A	5.123	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB) .

Site: AC1	Time: 2019/06/28 - 23:43
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D	Polarity: Vertical
EUT: Aruba 500 接入點	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11 ac-VHT40 at channel 5755MHz Ant 0 + 1	

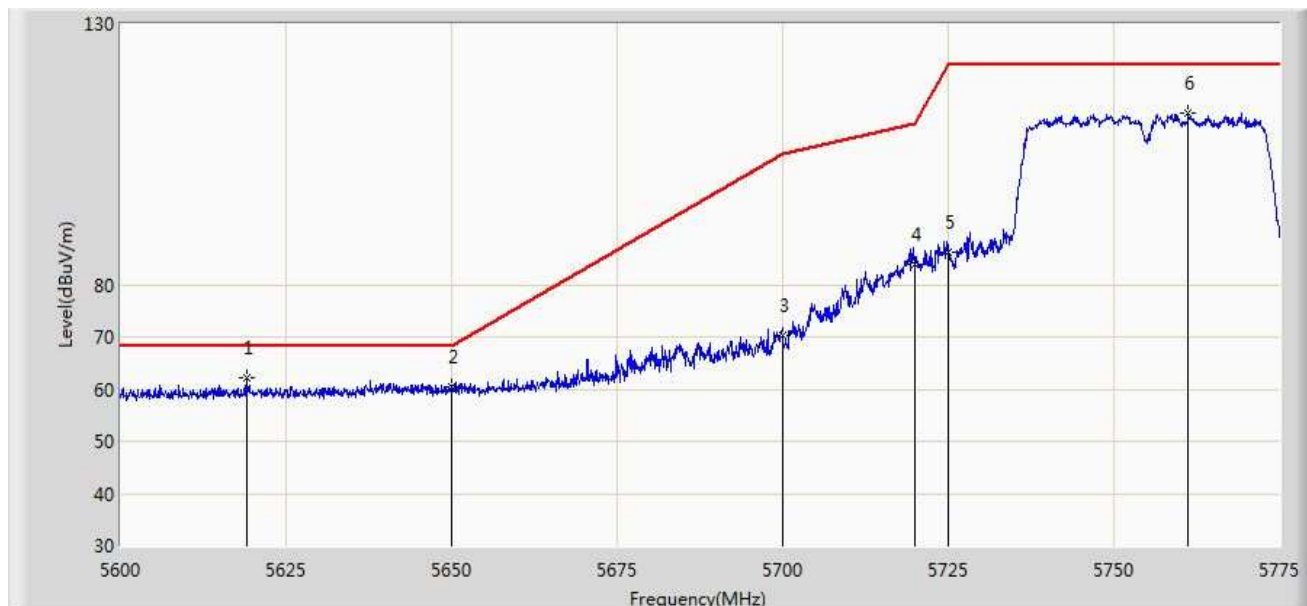


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5618.987	62.146	57.519	-6.054	68.200	4.627	PK
2		5650.000	60.320	55.574	-7.880	68.200	4.746	PK
3		5700.000	70.324	65.386	-34.876	105.200	4.938	PK
4		5720.000	83.813	78.798	-26.987	110.800	5.015	PK
5		5725.000	86.177	81.143	-36.023	122.200	5.034	PK
6		5761.175	112.869	107.696	N/A	N/A	5.172	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB) .

Site: AC1	Time: 2019/06/28 - 23:47
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D	Polarity: Horizontal
EUT: Aruba 500 接入點	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11 ac-VHT40 at channel 5795MHz Ant 0 + 1	

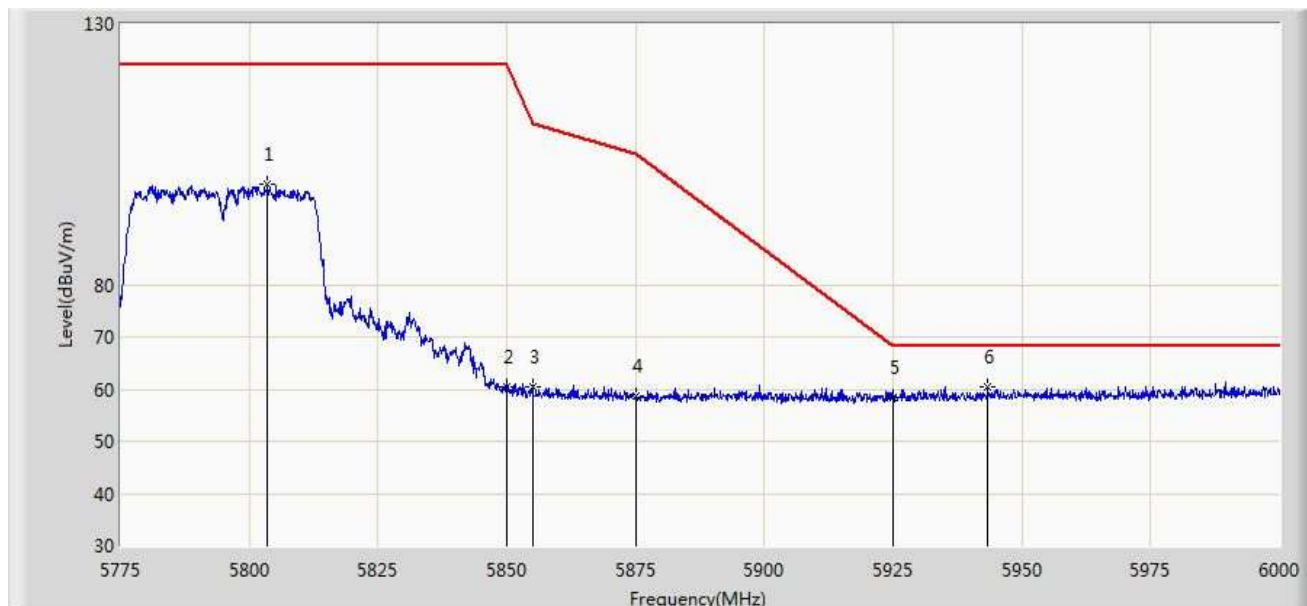


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5803.575	99.208	93.872	N/A	N/A	5.335	PK
2		5850.000	60.579	55.065	-61.621	122.200	5.514	PK
3		5855.000	60.555	55.022	-50.245	110.800	5.533	PK
4		5875.000	58.621	53.011	-46.579	105.200	5.610	PK
5		5925.000	58.417	52.615	-9.783	68.200	5.802	PK
6	*	5943.413	60.547	54.674	-7.653	68.200	5.873	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB) .

Site: AC1	Time: 2019/06/28 - 23:45
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D	Polarity: Vertical
EUT: Aruba 500 接入點	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11 ac-VHT40 at channel 5795MHz Ant 0 + 1	

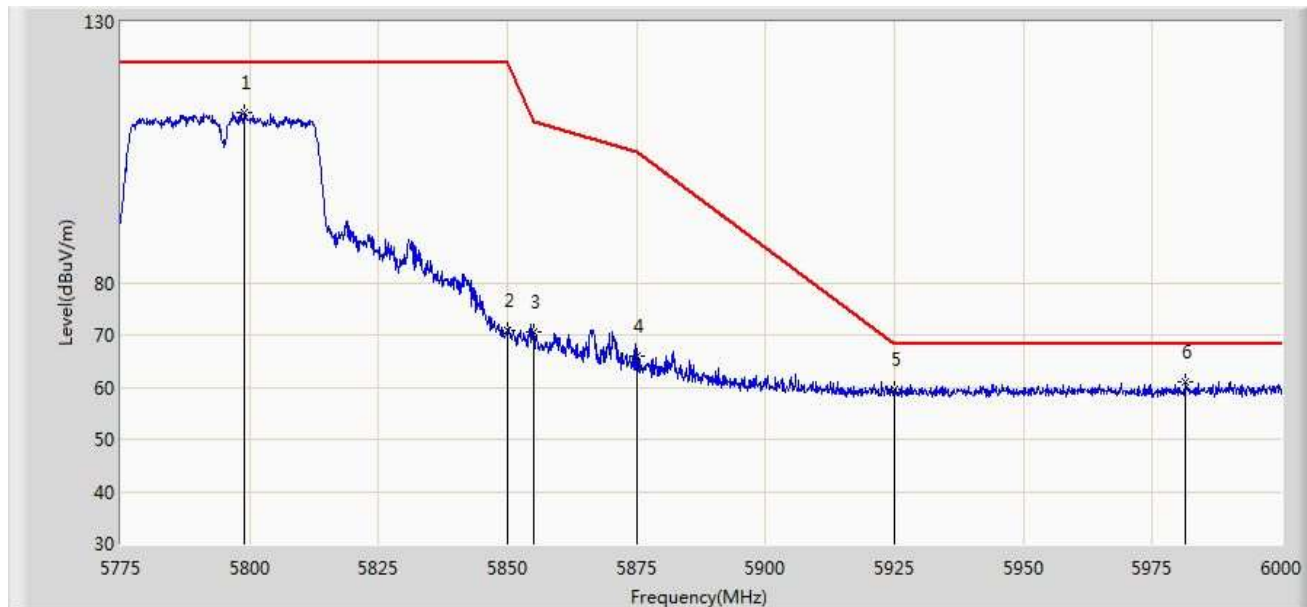


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5798.850	112.683	107.365	N/A	N/A	5.318	PK
2		5850.000	70.802	65.288	-51.398	122.200	5.514	PK
3		5855.000	70.648	65.115	-40.152	110.800	5.533	PK
4		5875.000	65.881	60.271	-39.319	105.200	5.610	PK
5		5925.000	59.488	53.686	-8.712	68.200	5.802	PK
6	*	5981.325	60.975	54.957	-7.225	68.200	6.018	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB) .

Site: AC1	Time: 2019/06/28 - 23:53
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D	Polarity: Horizontal
EUT: Aruba 500 接入點	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11 ac-VHT80 at channel 5210MHz Ant 0 + 1	

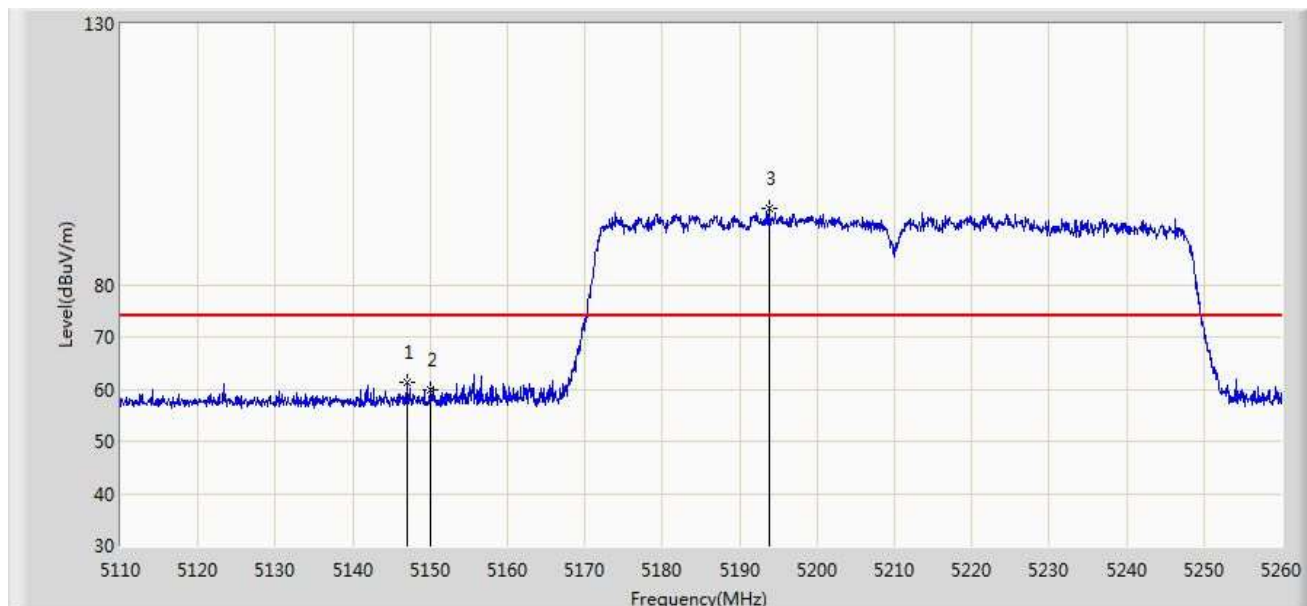


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5146.975	61.228	57.355	-12.772	74.000	3.873	PK
2		5150.000	59.909	56.033	-14.091	74.000	3.876	PK
3	*	5193.775	94.782	90.869	N/A	N/A	3.913	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2019/06/28 - 23:54
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D	Polarity: Horizontal
EUT: Aruba 500 接入點	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11 ac-VHT80 at channel 5210MHz Ant 0 + 1	

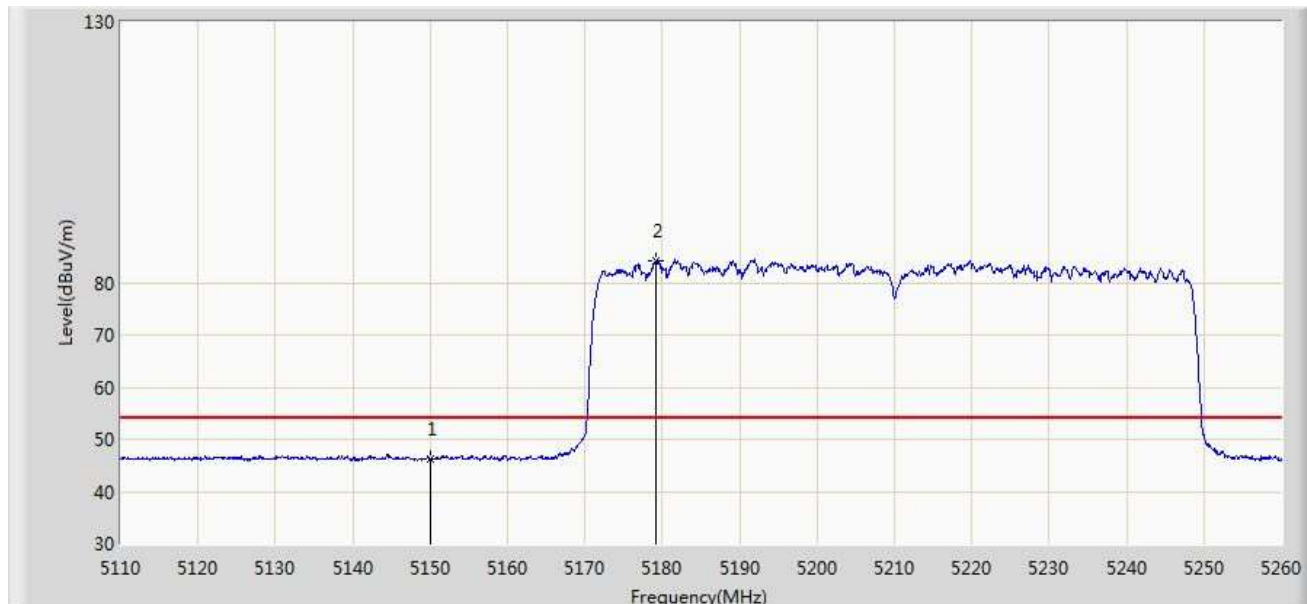


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5150.000	46.333	42.457	-7.667	54.000	3.876	AV
2	*	5179.225	84.212	80.311	N/A	N/A	3.901	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2019/06/28 - 23:53
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D	Polarity: Vertical
EUT: Aruba 500 接入點	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11 ac-VHT80 at channel 5210MHz Ant 0 + 1	

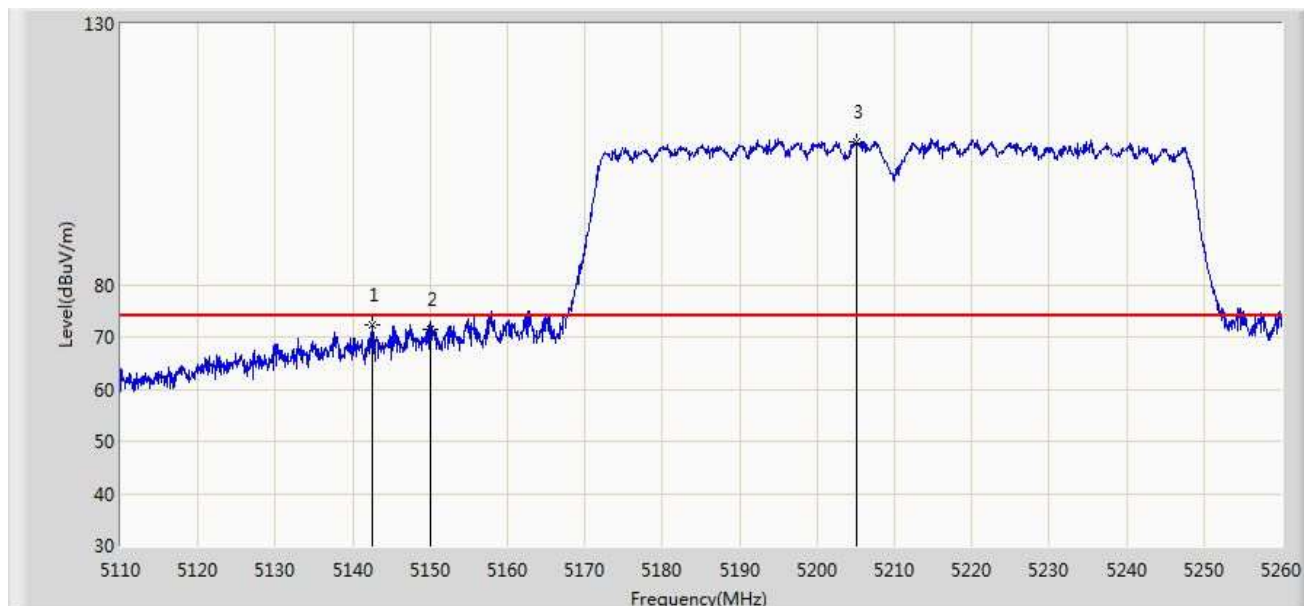


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5142.550	72.190	68.321	-1.810	74.000	3.869	PK
2		5150.000	71.351	67.475	-2.649	74.000	3.876	PK
3	*	5205.025	107.519	103.596	N/A	N/A	3.923	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2019/06/28 - 23:52
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D	Polarity: Vertical
EUT: Aruba 500 接入點	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11 ac-VHT80 at channel 5210MHz Ant 0 + 1	

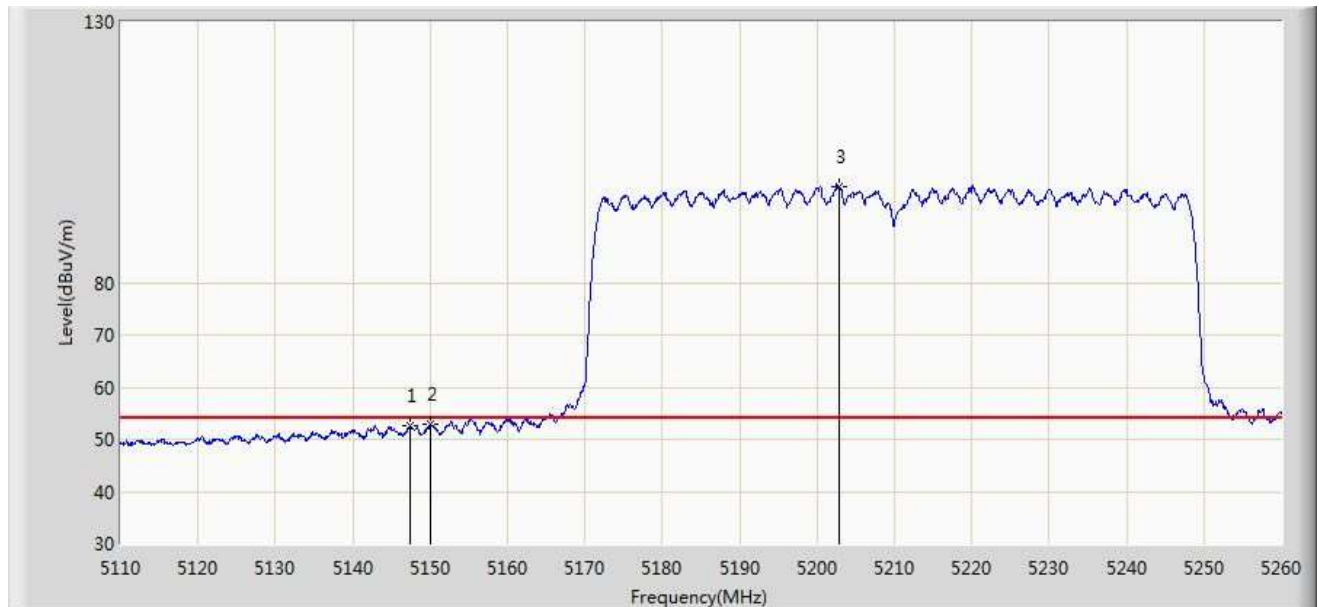


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5147.350	52.537	48.664	-1.463	54.000	3.873	AV
2		5150.000	52.848	48.972	-1.152	54.000	3.876	AV
3	*	5202.775	98.485	94.564	N/A	N/A	3.921	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2019/06/29 - 00:00
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D	Polarity: Horizontal
EUT: Aruba 500 接入點	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11 ac-HT80 at channel 5290MHz Ant 0 + 1	

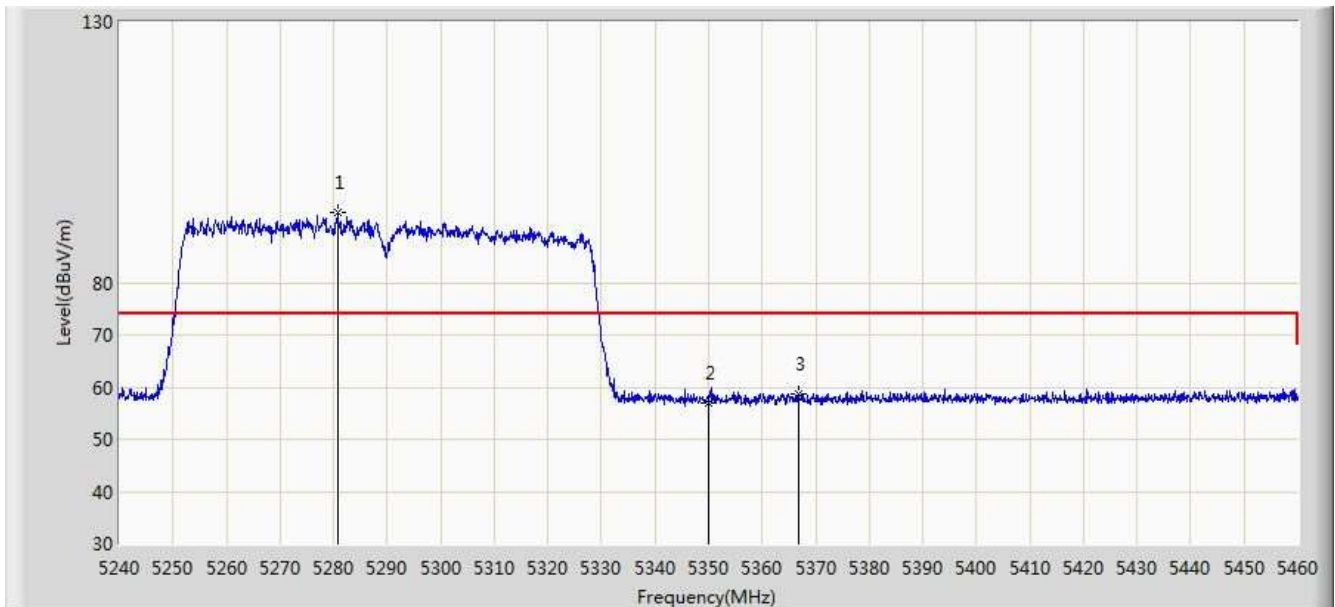


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5280.700	93.391	89.405	N/A	N/A	3.986	PK
2		5350.000	56.890	52.846	-17.110	74.000	4.044	PK
3		5366.720	58.735	54.677	-15.265	74.000	4.058	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2019/06/29 - 00:01
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D	Polarity: Horizontal
EUT: Aruba 500 接入點	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11 ac-HT80 at channel 5290MHz Ant 0 + 1	

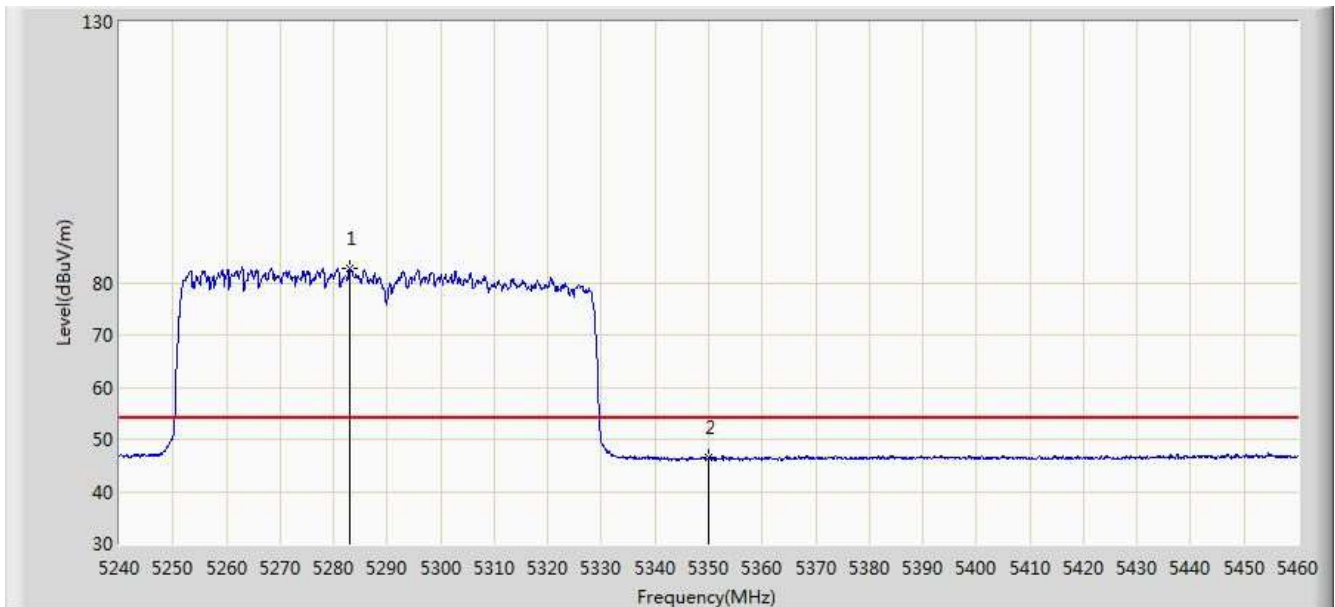


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5283.010	82.735	78.747	N/A	N/A	3.988	AV
2		5350.000	46.457	42.413	-7.543	54.000	4.044	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2019/06/28 - 23:59
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D	Polarity: Vertical
EUT: Aruba 500 接入點	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11 ac-HT80 at channel 5290MHz Ant 0 + 1	

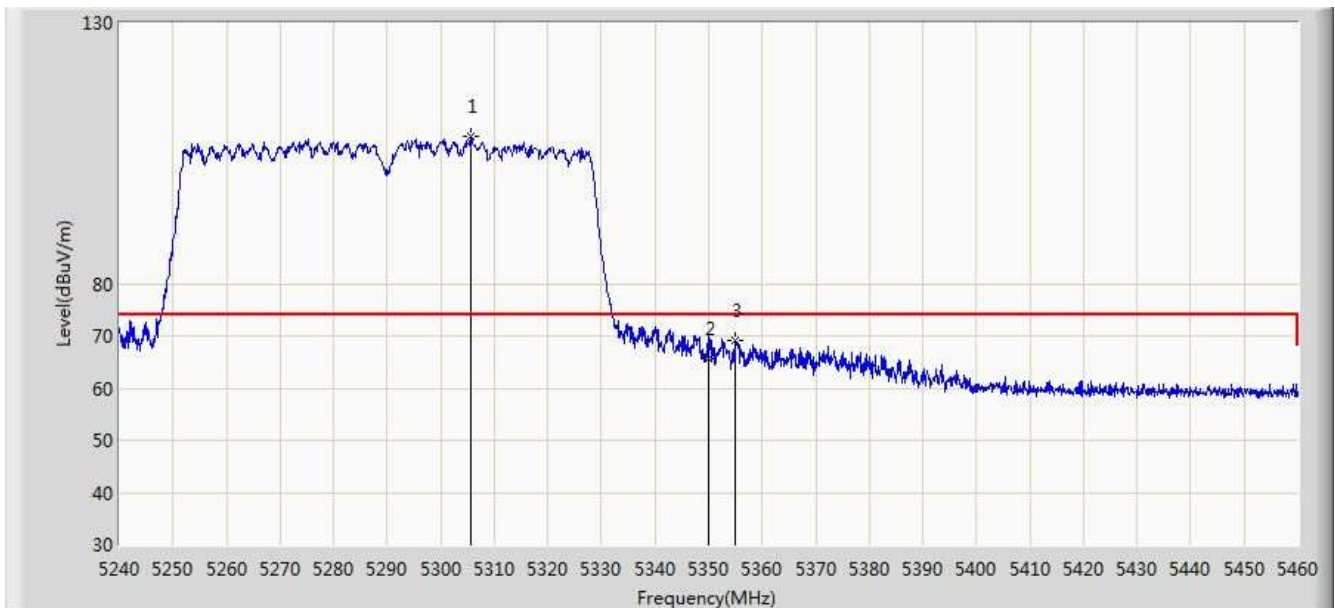


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5305.560	108.131	104.125	N/A	N/A	4.006	PK
2		5350.000	65.742	61.698	-8.258	74.000	4.044	PK
3		5355.060	69.104	65.055	-4.896	74.000	4.049	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2019/06/28 - 23:58
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D	Polarity: Vertical
EUT: Aruba 500 接入點	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11 ac-HT80 at channel 5290MHz Ant 0 + 1	

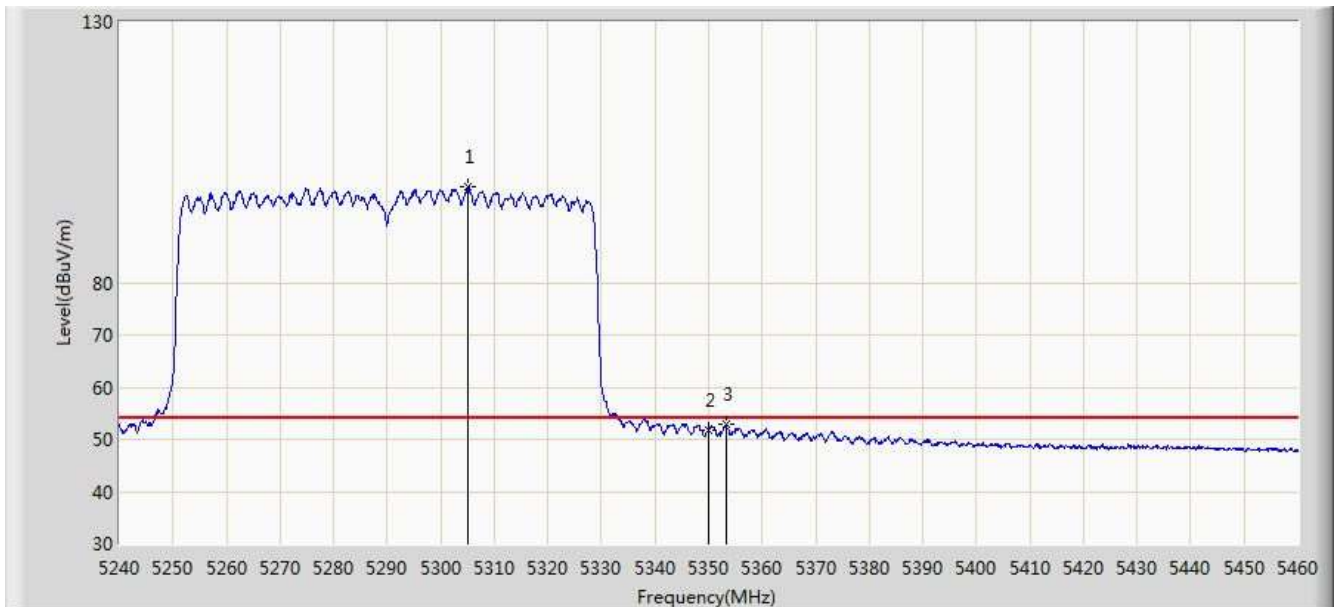


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5305.120	98.267	94.261	N/A	N/A	4.006	AV
2		5350.000	51.667	47.623	-2.333	54.000	4.044	AV
3		5353.300	53.006	48.959	-0.994	54.000	4.047	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2019/06/29 - 00:05
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D	Polarity: Horizontal
EUT: Aruba 500 接入點	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11 ac-HT80 at channel 5530MHz Ant 0 + 1	

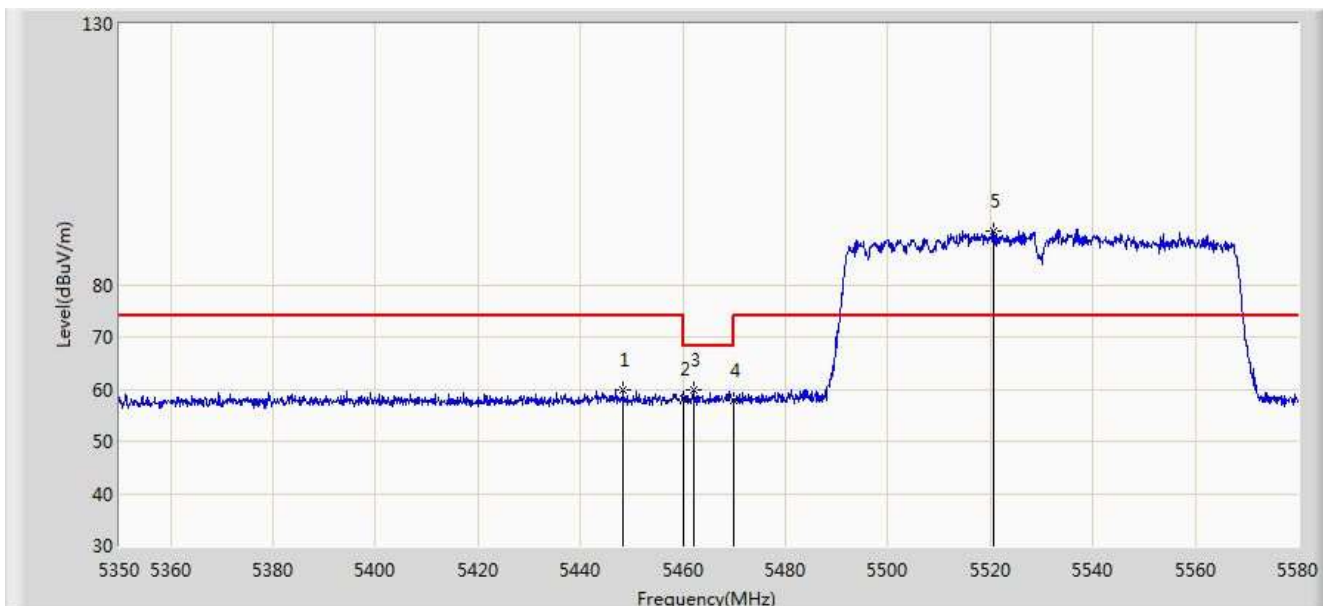


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5448.325	59.731	55.605	-14.269	74.000	4.126	PK
2		5460.000	58.082	53.946	-15.918	74.000	4.136	PK
3		5462.010	59.829	55.691	-8.371	68.200	4.138	PK
4		5470.000	57.761	53.617	-10.439	68.200	4.144	PK
5	*	5520.660	90.229	85.979	N/A	N/A	4.250	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2019/06/29 - 00:05
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D	Polarity: Horizontal
EUT: Aruba 500 接入點	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11 ac-HT80 at channel 5530MHz Ant 0 + 1	

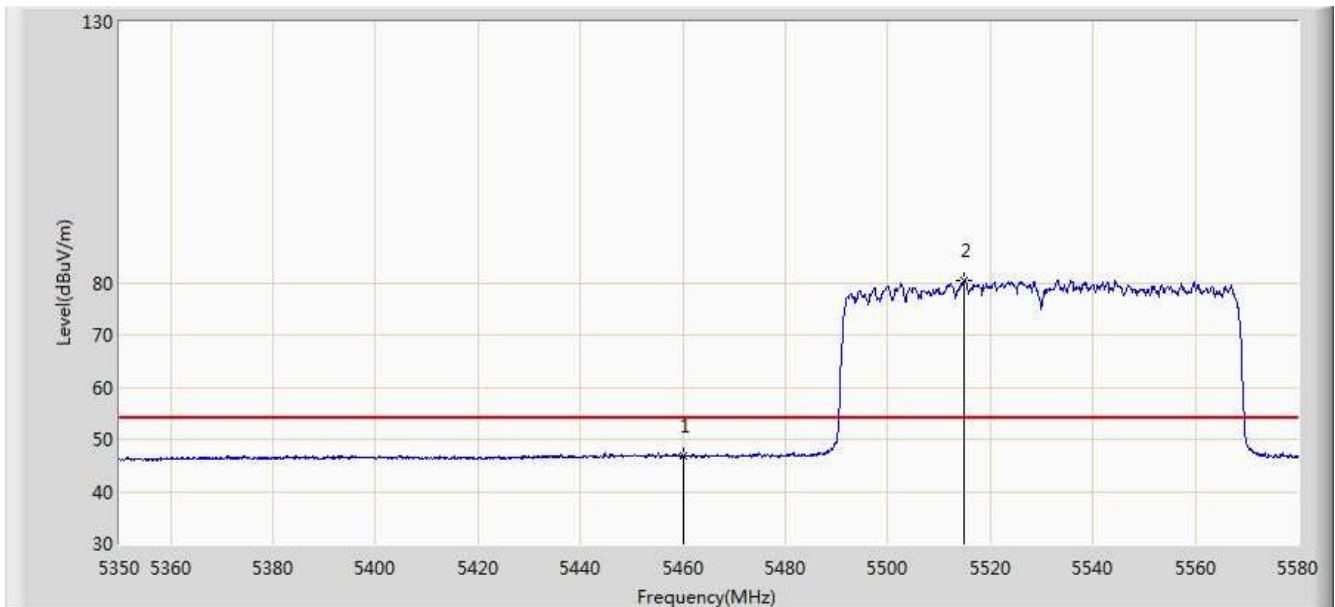


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5460.000	46.900	40.288	-7.100	54.000	6.612	AV
2	*	5514.910	80.471	73.751	N/A	N/A	6.720	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2019/06/29 - 00:04
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D	Polarity: Vertical
EUT: Aruba 500 接入點	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11 ac-HT80 at channel 5530MHz Ant 0 + 1	

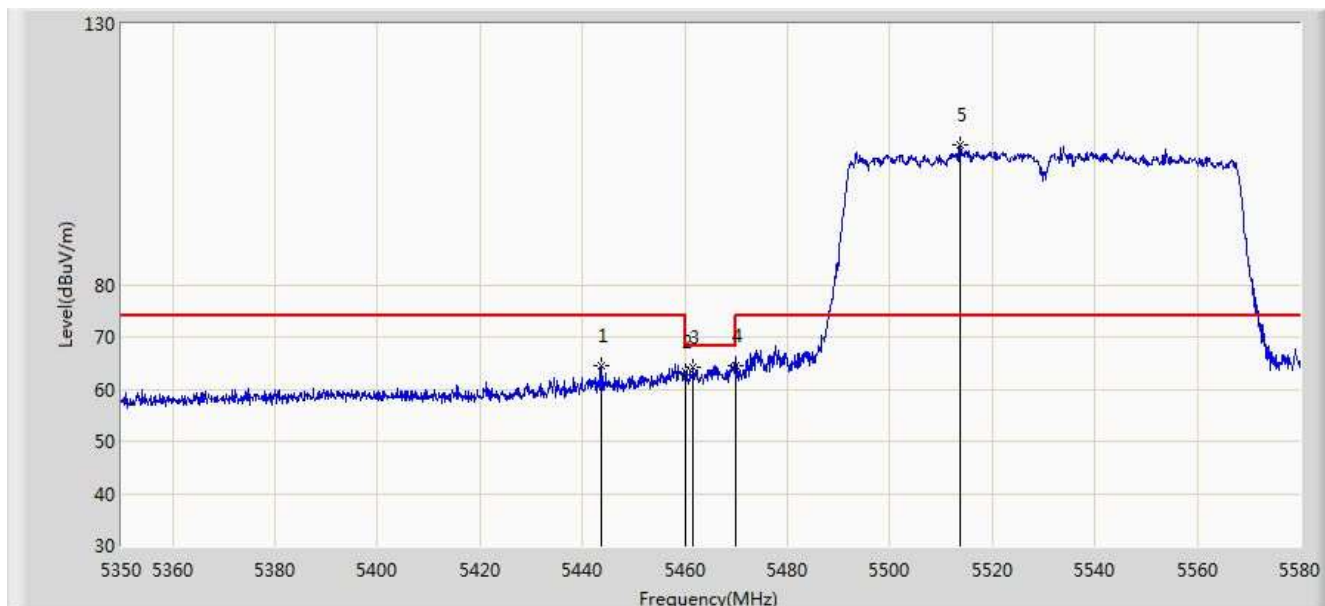


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5443.725	64.632	60.510	-9.368	74.000	4.122	PK
2		5460.000	63.232	59.096	-10.768	74.000	4.136	PK
3		5461.665	64.273	60.136	-3.927	68.200	4.137	PK
4		5470.000	64.618	60.474	-3.582	68.200	4.144	PK
5	*	5513.645	106.759	102.536	N/A	N/A	4.223	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2019/06/29 - 00:05
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D	Polarity: Vertical
EUT: Aruba 500 接入點	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11 ac-HT80 at channel 5530MHz Ant 0 + 1	

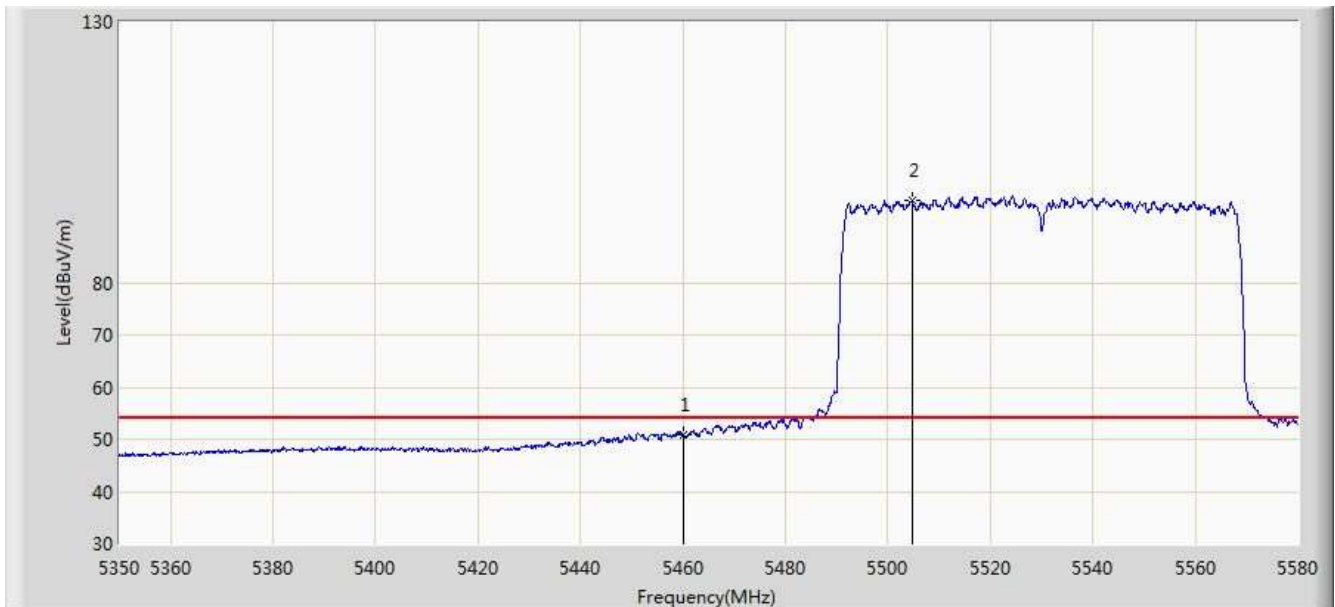


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5460.000	50.898	46.762	-3.102	54.000	4.136	AV
2	*	5504.675	95.750	91.561	N/A	N/A	4.189	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2019/06/29 - 00:09
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D	Polarity: Horizontal
EUT: Aruba 500 接入點	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11 ac-HT80 at channel 5610MHz Ant 0 + 1	

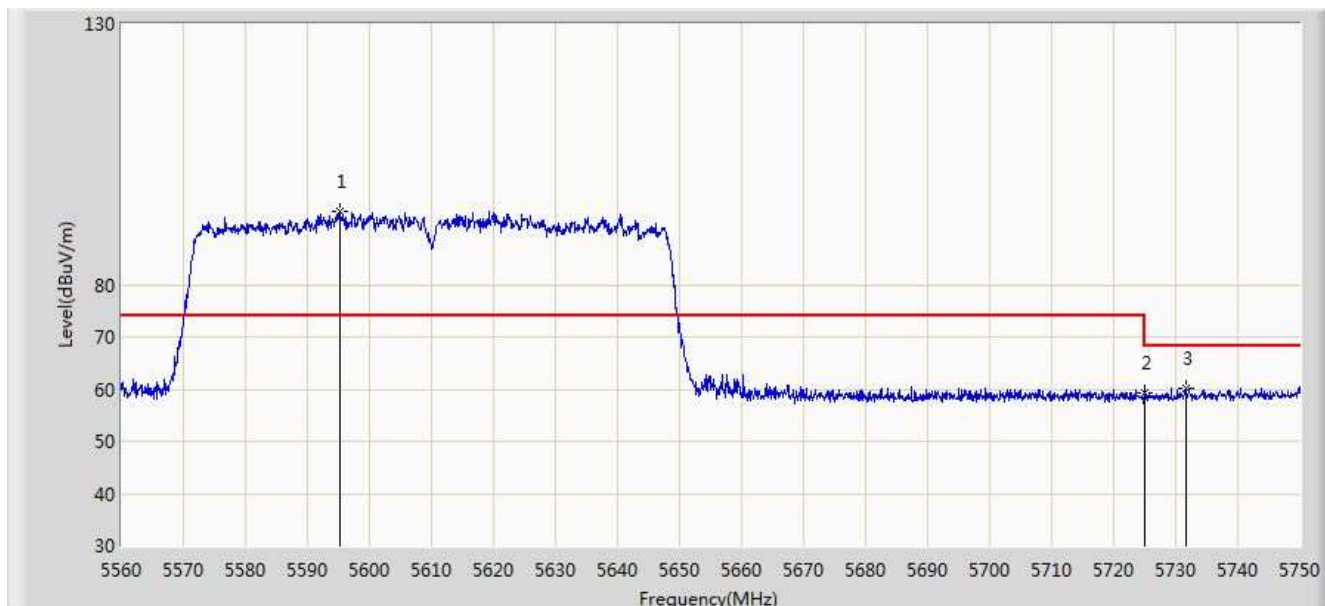


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5595.150	93.949	89.414	N/A	N/A	4.535	PK
2		5725.000	59.195	54.161	-9.005	68.200	5.034	PK
3		5731.665	60.183	55.124	-8.017	68.200	5.059	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2019/06/29 - 00:07
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D	Polarity: Vertical
EUT: Aruba 500 接入點	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11 ac-HT80 at channel 5610MHz Ant 0 + 1	

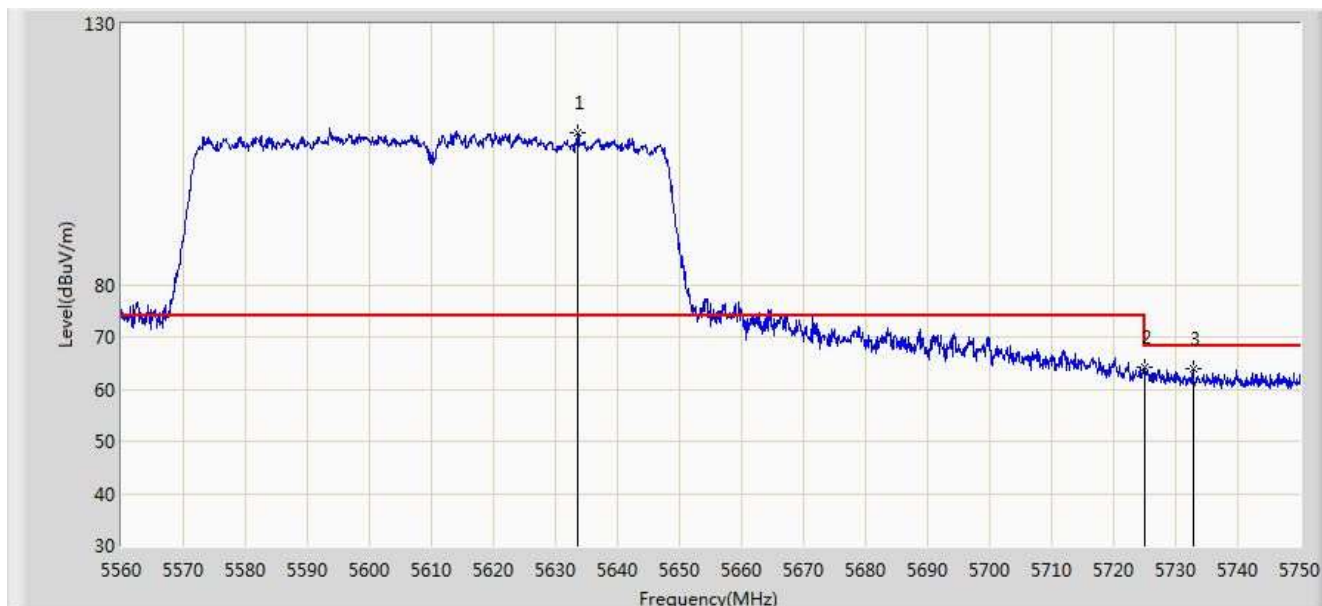


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5633.625	109.221	104.537	N/A	N/A	4.684	PK
2		5725.000	64.152	59.118	-4.048	68.200	5.034	PK
3		5732.805	63.941	58.877	-4.259	68.200	5.063	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2019/06/29 - 00:13
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D	Polarity: Horizontal
EUT: Aruba 500 接入點	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11 ac-VHT80 at channel 5775MHz	

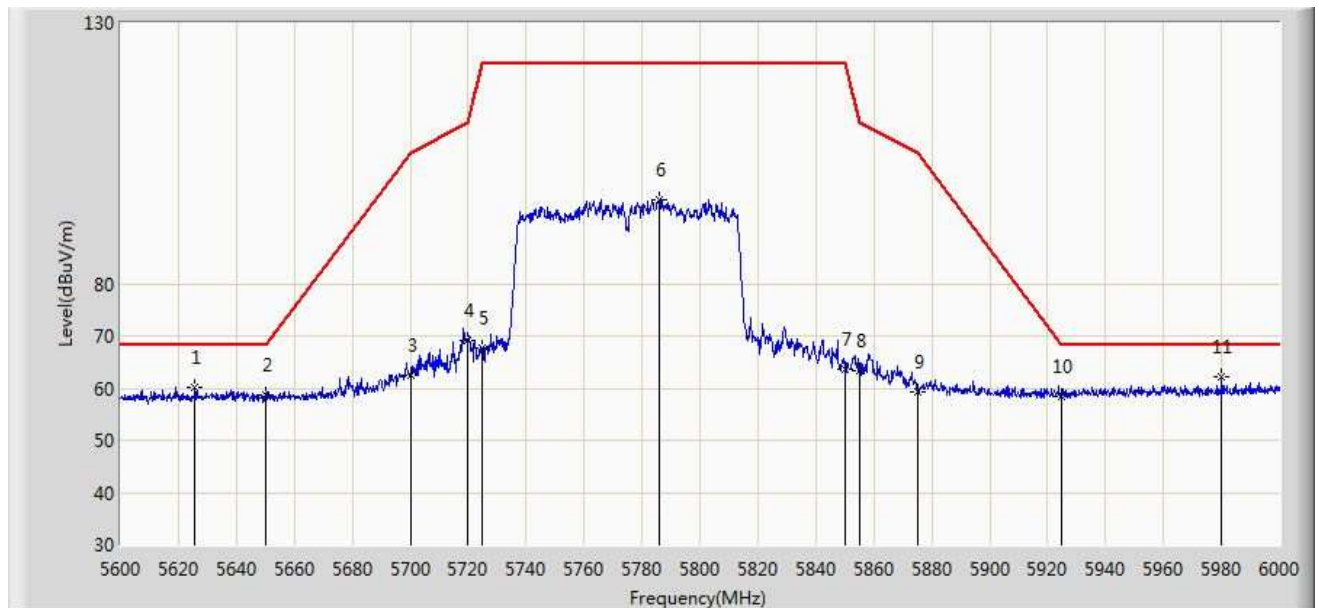


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5625.800	60.213	55.560	-7.987	68.200	4.653	PK
2		5650.000	58.830	54.084	-9.370	68.200	4.746	PK
3		5700.000	62.537	57.599	-42.663	105.200	4.938	PK
4		5720.000	69.122	64.107	-41.678	110.800	5.015	PK
5		5725.000	67.549	62.515	-54.651	122.200	5.034	PK
6		5786.000	96.102	90.833	N/A	N/A	5.269	PK
7		5850.000	63.630	58.116	-58.570	122.200	5.514	PK
8		5855.000	63.452	57.919	-47.348	110.800	5.533	PK
9		5875.000	59.308	53.698	-45.892	105.200	5.610	PK
10		5925.000	58.290	52.488	-9.910	68.200	5.802	PK
11	*	5980.200	62.057	56.043	-6.143	68.200	6.014	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB) .

Site: AC1	Time: 2019/06/29 - 00:09
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D	Polarity: Vertical
EUT: Aruba 500 接入點	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11 ac-VHT80 at channel 5775MHz	

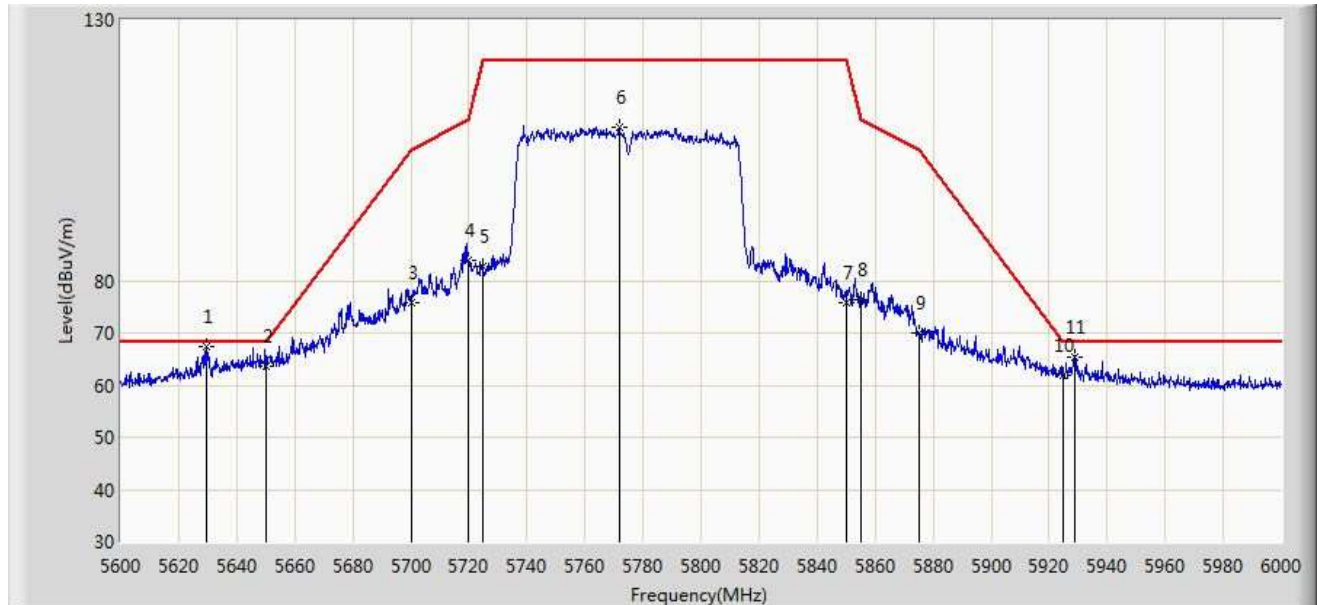


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5629.800	67.343	62.674	-0.857	68.200	4.669	PK
2		5650.000	63.750	59.004	-4.450	68.200	4.746	PK
3		5700.000	75.790	70.852	-29.410	105.200	4.938	PK
4		5720.000	84.001	78.986	-26.799	110.800	5.015	PK
5		5725.000	82.683	77.649	-39.517	122.200	5.034	PK
6		5771.800	109.330	104.116	N/A	N/A	5.214	PK
7		5850.000	75.845	70.331	-46.355	122.200	5.514	PK
8		5855.000	76.493	70.960	-34.307	110.800	5.533	PK
9		5875.000	70.135	64.525	-35.065	105.200	5.610	PK
10		5925.000	61.998	56.196	-6.202	68.200	5.802	PK
11		5929.000	65.392	59.575	-2.808	68.200	5.817	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB) .

Site: AC1	Time: 2019/06/29 - 00:20
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D	Polarity: Horizontal
EUT: Aruba 500 接入點	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11 ax-HE20 at channel 5180MHz Ant 0 + 1	

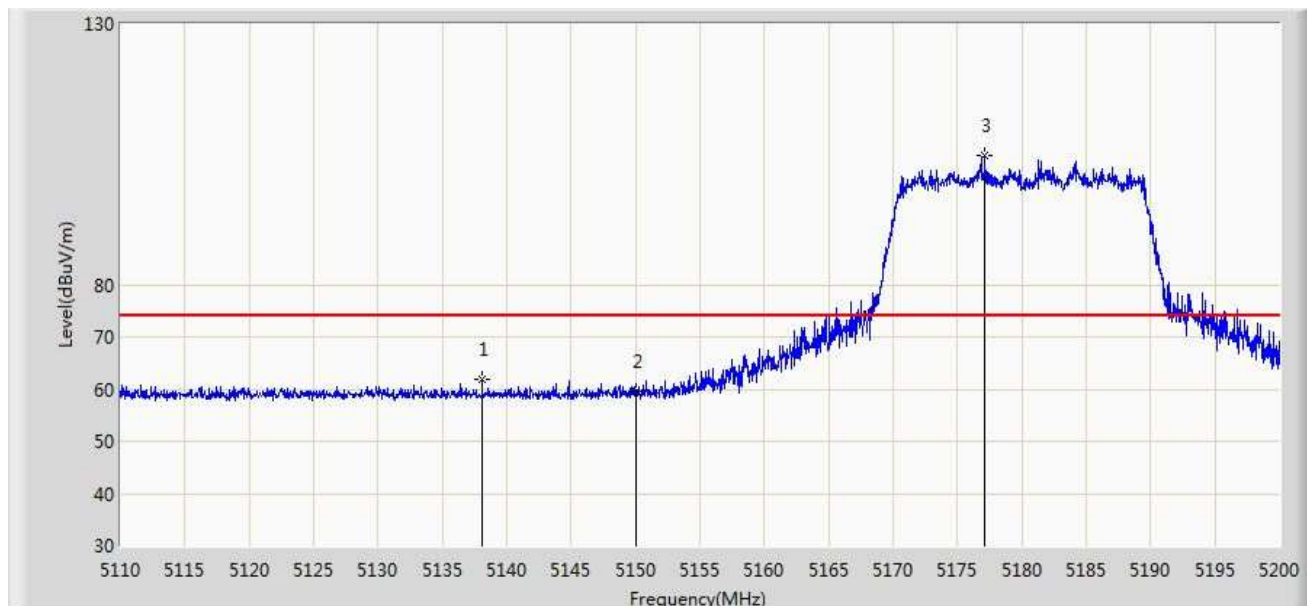


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5138.080	62.002	58.136	-11.998	74.000	3.866	PK
2		5150.000	59.686	55.810	-14.314	74.000	3.876	PK
3	*	5177.140	104.893	100.994	N/A	N/A	3.899	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2019/06/29 - 00:22
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D	Polarity: Horizontal
EUT: Aruba 500 接入點	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11 ax-HE20 at channel 5180MHz Ant 0 + 1	

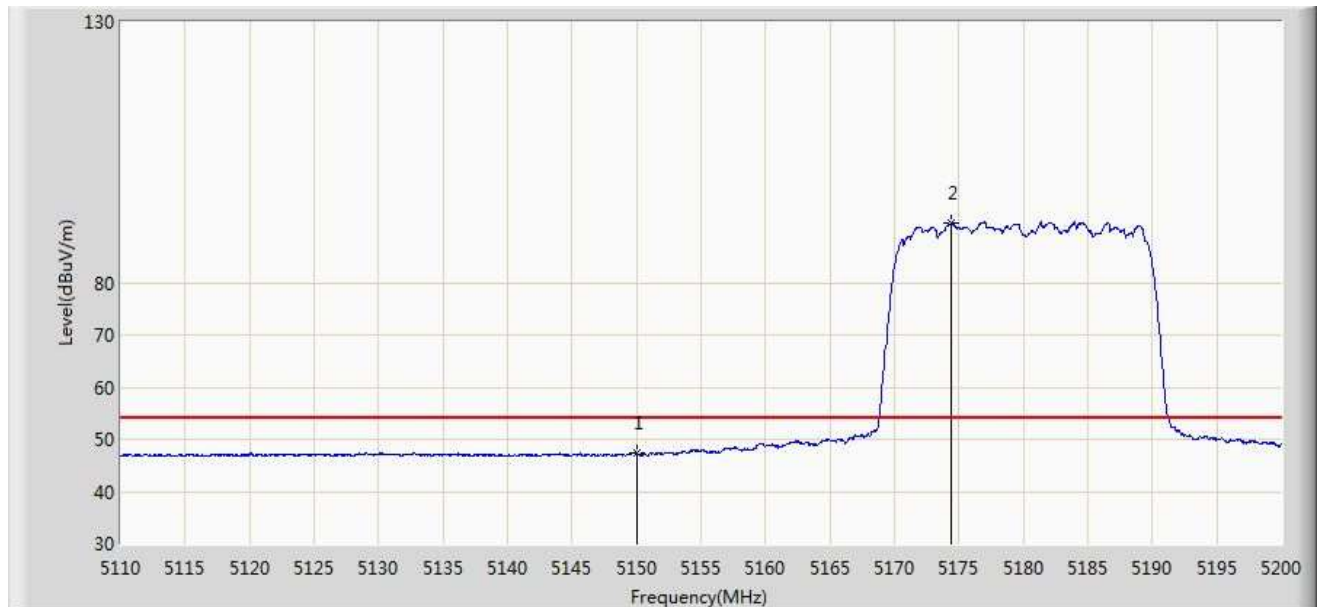

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5150.000	47.367	43.491	-6.633	54.000	3.876	AV
2	*	5174.395	91.354	87.458	N/A	N/A	3.896	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).