Radio equipment according to Certification Ordinance Article 2 Paragraph 1 of Item 19 According to MIC Notice No. 88 Appendix 43

for

BLE Module

Model No.: TC2340R5

of

Applicant: RIFO TECHNOLOGY CO., LTD.
Address: No. 12, Lane 53, Dongnan Street, Hsinchu City, 300033, Taiwan

Tested and Prepared

By

Worldwide Testing Services (Taiwan) Co., Ltd.

Report No.: W6M22508-24659-J-1

6F, NO. 58, LANE 188, RUEY-KUANG RD., NEIHU TAIPEI 114, TAIWAN, R.O.C.
TEL: 886-2-66068877 FAX: 886-2-66068879 E-mail: wts@wts-lab.com

複製禁止

TABLE OF CONTENTS

1	**General Information**	**2**
1.1	Notes	2
1.2	Testing laboratory	4
1.2.1	Location	4
1.2.2	Details of accreditation status	4
1.3	Details of applicant	4
1.4	Application details	4
1.5	Equipment information	4
1.6	Assembly	5
1.7	Test standard	5
1.8	Test method	5
2	**Technical Test**	**6**
2.1	Summary of test results	6
2.2	Test environment	6
2.3	Test setup	6
2.4	Test equipment utilized	7
3	**Test results (enclosure)**	**8**
3.1	Antenna specifications	9
3.2	Frequency Tolerance	15
3.3	Occupied Bandwidth (99% channel power bandwidth)	16
3.4	Spurious emissions (conducted)_ transmitter	27
3.5	Antenna Power	244
3.6	E.I.R.P.	246
3.7	Spurious emission receiver	247
3.8	Interference Prevention Function	392

1 General Information

1.1 Notes

The purpose of conformity testing is to increase the probability of adherence to the essential requirements or conformity specifications, as appropriate.

The complexity of the technical specifications, however, means that full and thorough testing is impractical for both technical and economic reasons.

Furthermore, there is no guarantee that a test sample, which has passed all the relevant tests conforms to a specification.

Neither is there any guarantee that such a test sample will interwork with other genuinely open systems.

The existence of the tests nevertheless provides the confidence that the test sample possesses the qualities as maintained and that is performance generally conforms to representative cases of communications equipment.

Laboratory disclaimer-

1. The test results of this test report relate exclusively to the item tested as specified in 1.5.
2. The test report may only be reproduced or published in full.
3. Reproduction or publication of extracts from the report requires the prior written approval of the Worldwide Testing Services (Taiwan) Co., Ltd.
4. Antenna gain is provided by applicant and laboratory issue relevant data and results.

Tester:

December 15, 2025	Sora Kuo	Sora
Date WTS-Lab.	Name	Signature

Technical responsibility for area of testing:

December 15, 2025	Kevin Wang	Kevin Wang
Date WTS	Name	Signature

1.2 Testing laboratory

1.2.1 Location

10m OATS
No.5-1, Lishui, Shuang Sing Village, Wanli Dist.,
New Taipei City 207, Taiwan (R.O.C.)

3 meter semi-anechoic chamber
No. 99, Sec. 1, Balian Rd., Xizhi Dist.,
New Taipei City 221032, Taiwan (R.O.C.)

Worldwide Testing Services (Taiwan) Co., Ltd.
6F., No. 58, Ln. 188, Ruiguang Rd., Neihu Dist.,
Taipei City 114 , Taiwan (R.O.C.)
Tel: 886-2-6606-8877

1.2.2 Details of accreditation status

Accredited testing laboratory

Telefication Reviewed Laboratory: TRL 0501

1.3 Details of applicant

Name	: RIFO TECHNOLOGY CO., LTD.
Street	: No. 12, Lane 53, Dongnan Street,
Town	: Hsinchu City, 300033,
Country	: Taiwan

1.4 Application details

Date of receipt of test item	: September 09, 2025
Date of test	: from September 10, 2025 to October 23, 2025

1.5 Equipment information

Description of test item	: BLE Module
Type identification	: TC2340R5
Multi-listing model no.	: ./.
Trade mark	: RIFO
Modulation type	: GFSK
Frequency range	: 2.4000 GHz - 2.4835 GHz
Tested frequencies	: BLE: 2.402 – 2.480 GHz

Frequency of the used channel : Bluetooth low energy mode
Frequency (ch 0): 2.402 GHz
Frequency (ch 19): 2.440 GHz
Frequency (ch 39): 2.480 GHz

Type of antenna : 1. Chip Antenna/2. Inverted F Antenna/3. External Antenna

Antenna gain : 1. 3.2 dBi/2. 3.3dBi/3. 2dBi

Rated output power : 10 mW

Sample no. : #01

Manufacturer: (if different from applicant)
Name : ./.
Street : ./.
Town : ./.
Country : ./.

1.6 Assembly

Use the shielding case.

1.7 Test standard

Article 2 Paragraph 1 of Item 19

1.8 Test method

MIC notification. No.88 of 2004, Annex 43

2 Technical Test

2.1 Summary of test results


No deviations from the technical specifications were ascertained in the course of the test performed.

2.2 Test environment


Temperature	:	5 ° C - 35 ° C
Relative humidity content	:	45% - 85%
Air pressure	:	990 - 1300 hPa
Details of power supply	:	3Vd.c.
Other parameter	:	./.
Extreme conditions parameters	:	--

2.3 Test setup

Antenna power

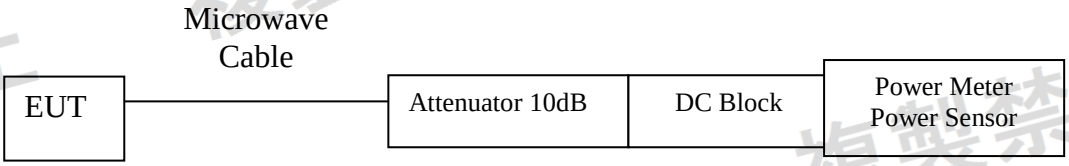

Frequency tolerance, Occupied bandwidth, Spreading bandwidth and Spurious emission

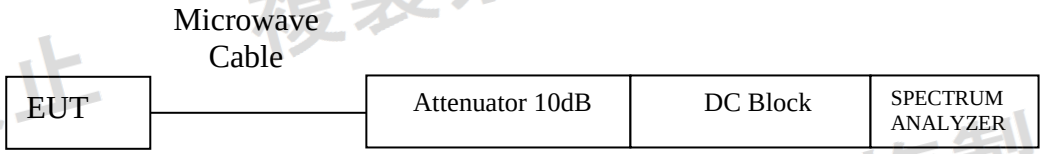

Test item Name	Measurement Uncertainty
Estimation Result of Uncertainty of Frequency Drift Measurement	Expanded Uncertainty：6.11 Hz
Estimation Result of Uncertainty of Bandwidth Measurement	Expanded Uncertainty：0.37 kHz
Estimation Result of Uncertainty of Conducted Output Power Measurement	Expanded Uncertainty：1.63 dB

The decision rule is: Measurement uncertainty is not included in the calculation of test results.

2.4 Test equipment utilized

Frequency Tolerance & Occupied Bandwidth & Power

Code No.	Test equipment	Mode No.	Serial No.	Brand	Cal. Date	Next Cal. Date	Calibration Body	Calibration Method
ETSTW-RE 050	Attenuator 10dB	50HF-010-1	None	JFW	2025/2/14	2026/2/13	WTS	C
ETSTW-RE 055	SPECTRUM ANALYZER	FSU 26	200074	R&S	2025/3/5	2026/3/4	ITRI	C
ETSTW-RE 099	DC Block	50DB-007-1	None	JFW	2025/2/14	2026/2/13	WTS	C
ETSTW-Cable 030	Microwave Cable	SUCOFLEX 104 （S_Cable 9）	279067	HUBER+SUHNER	2025/2/14	2026/2/13	WTS	C

Conducted Spurious Emission

Code No.	Test equipment	Mode No.	Serial No.	Brand	Cal. Date	Next Cal. Date	Calibration Body	Calibration Method
ETSTW-RE 050	Attenuator 10dB	50HF-010-1	None	JFW	2025/2/14	2026/2/13	WTS	C
ETSTW-RE 133	EXA Signal Analyzer	N9010A	MY53470566	Agilent	2025/5/8	2026/5/7	ITRI	C
ETSTW-RE 099	DC Block	50DB-007-1	None	JFW	2025/2/14	2026/2/13	WTS	C
ETSTW-Cable 030	Microwave Cable	SUCOFLEX 104 （S_Cable 9）	279067	HUBER+SUHNER	2025/2/14	2026/2/13	WTS	C

Calibration Method:

a) Calibration conducted by the National Institute of Information and Communications Technology (NICT) (hereinafter referred to as "NICT") or a designated calibration agency under Article 102-18 paragraph (1)

b) Correction conducted pursuant to the provisions of Article 135 or Article 144 of the Measurement Law (Law No. 51 of 1992)

c) Calibration conducted in foreign countries, which shall be equivalent to the calibration conducted by the NICT or a designated calibration agency under Article 102-18 paragraph (1)

d) Calibration conducted by using measuring instruments and other equipment listed in the right column of Table No. 3 attached hereto, which shall have been given any of calibration, etc. listed above from a) to c)


3 Test results (enclosure)


☒ 1st test ☐ test after modification ☐ production test


Test case	Subclause	Required	Status
General provisions			
Frequency tolerance	5	☒	C
Occupied bandwidth	6	☒	C
Spurious emissions	7	☒	C
Transmitting equipment			
Antenna power	14	☒	C
SAR	14.2	☐	NA
Frequency stabilization	15	☒	C
Transmitter antenna			
Type, configuration, etc. of transmitting antenna	20	☒	C
Directional pattern of transmitting antenna	22	☒	C
Receiving equipment			
Spurious emission of receiver	24	☒	C
Refer to all articles for transmitter antenna	26	☒	C
Operating frequency 2400-2483.5MHz			
High Frequency/modulation section cannot be opened easily	49.20(1); a	☒	C
Communication method	49.20(1); b	☒	C
Modulation method	49.20(1); c	☒	C
Spread spectrum method	49.20(1); d	☐	NA
Antenna power	49.20(1); e	☒	C
Absolute gain of transmitting antenna	49.20(1); f(1)	☒	C
E.I.R.P.	49.20(1); f(2)	☒	NA
Number of carriers within 1 MHz bandwidth in OFDM	49.20(1); g	☐	NA
Diffusion bandwidth	49.20(1); h	☒	C
Frequency retention time (FH employed)	49.20(1); j	☐	NA
Carrier sense (Only Air craft equipment unless FHSS)	./.	☐	NA
Interference Prevention Function	9-4. 8	☒	C

Note 1: C = Conform NC = Not Conform NT = Not Tested NA = Not Applicable


3.1 Antenna specifications

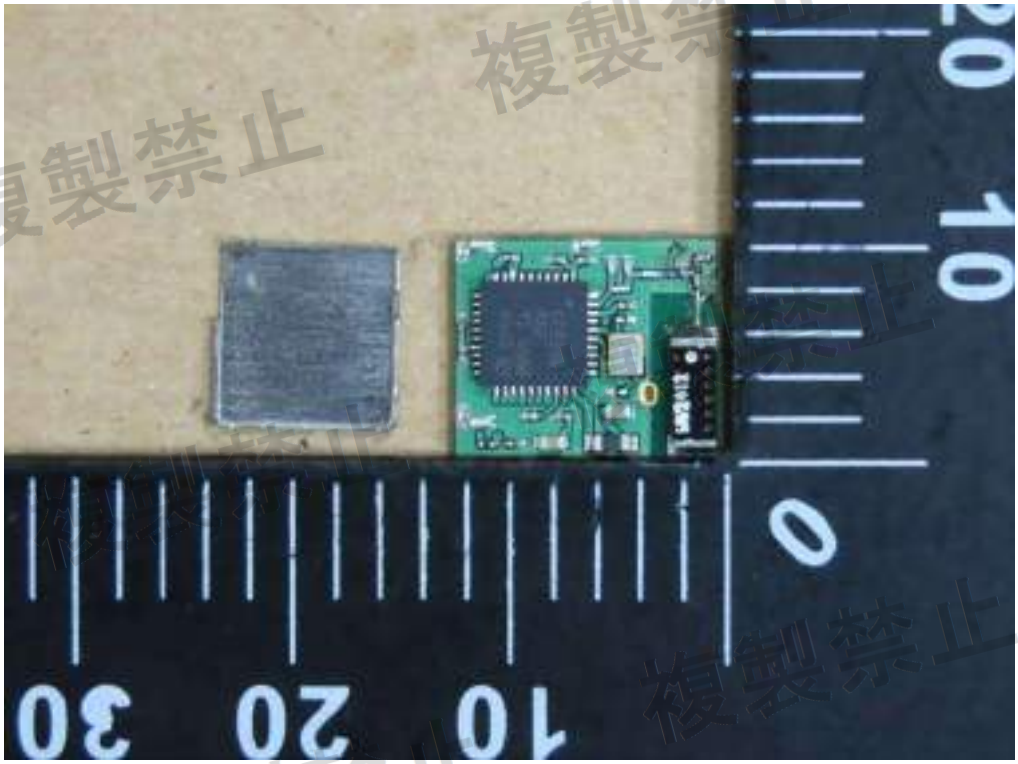


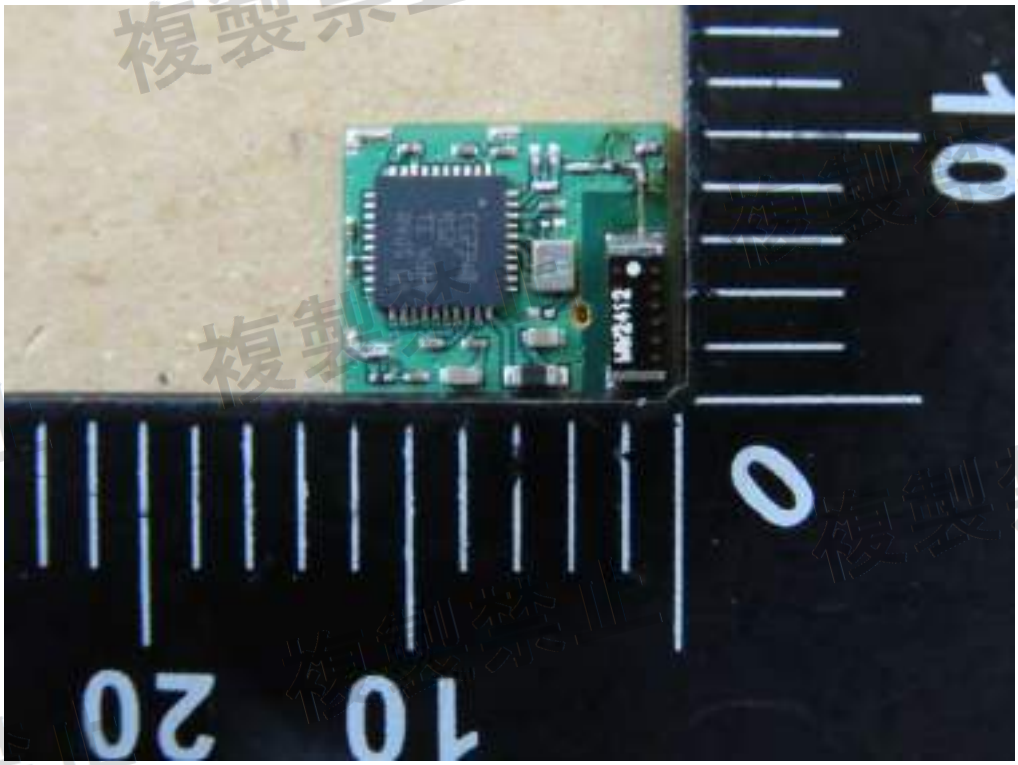


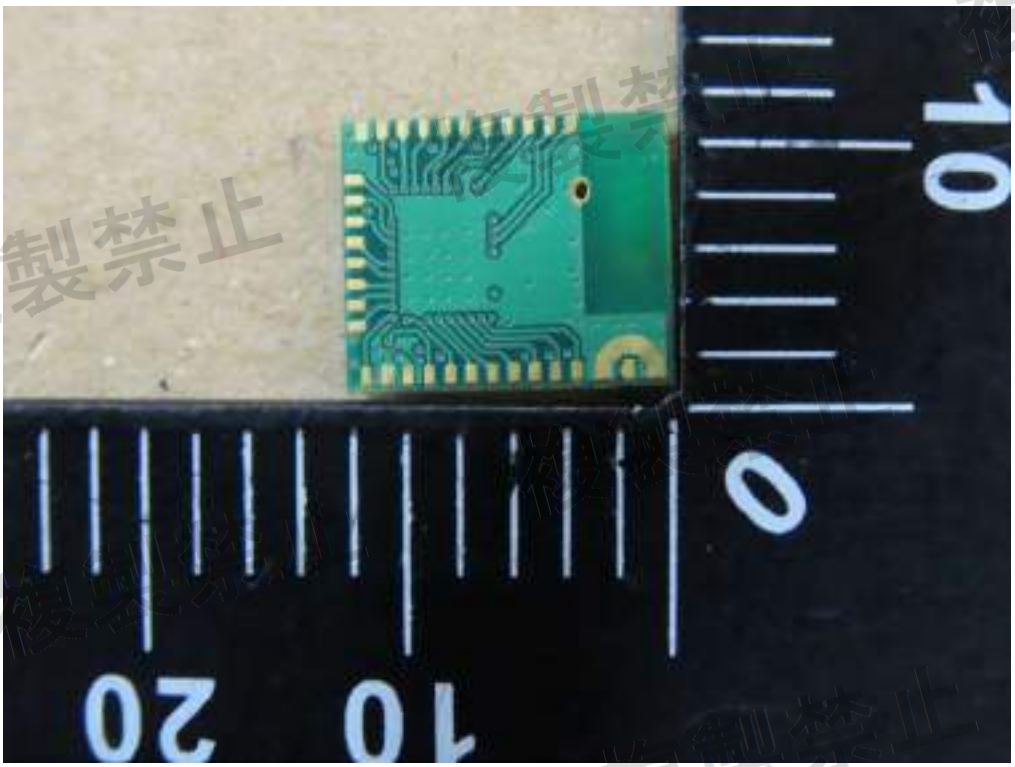


Antenna Type: Chip Antenna
Antenna gain: 3.2 dBi

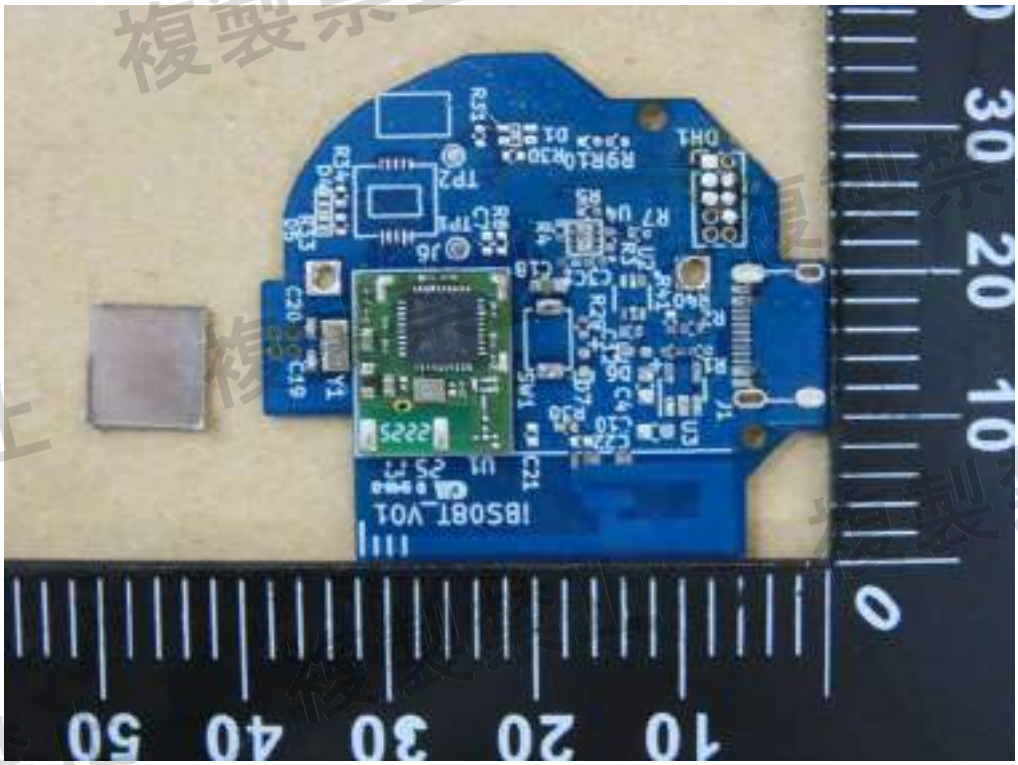


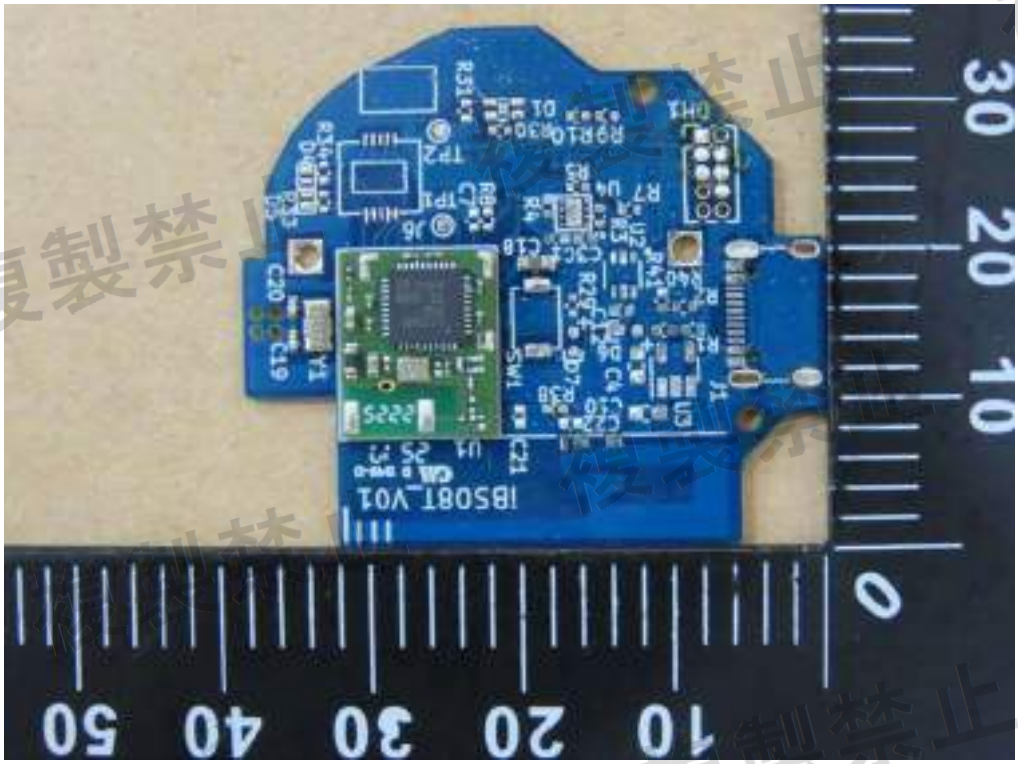

BS08T_V01

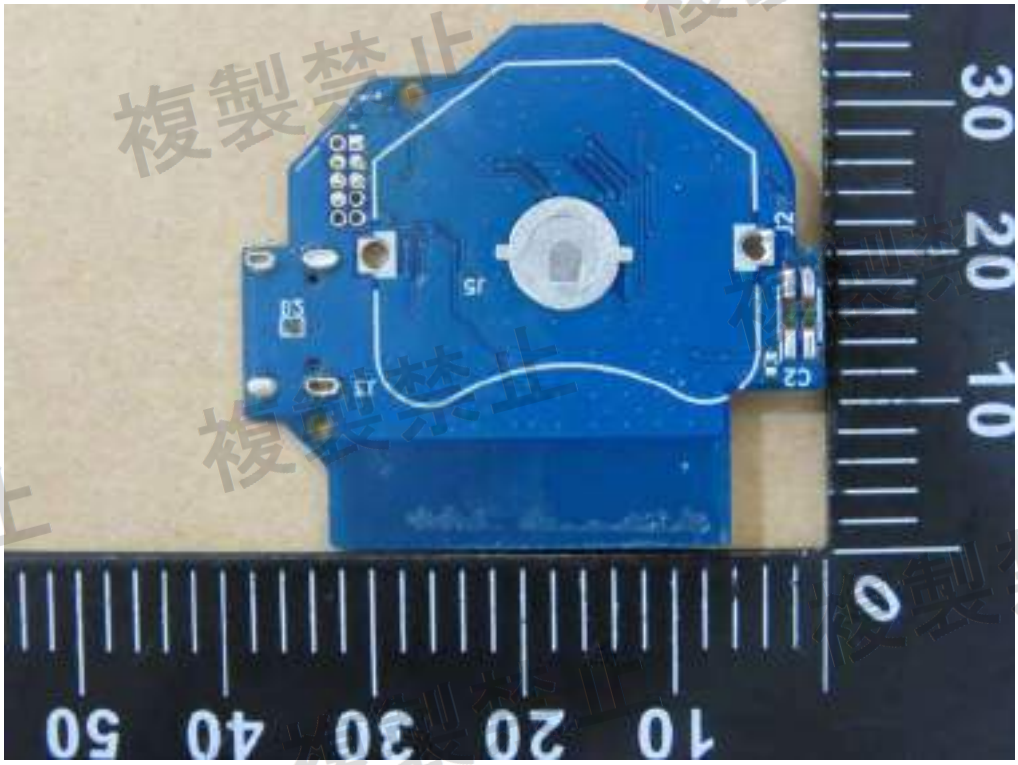


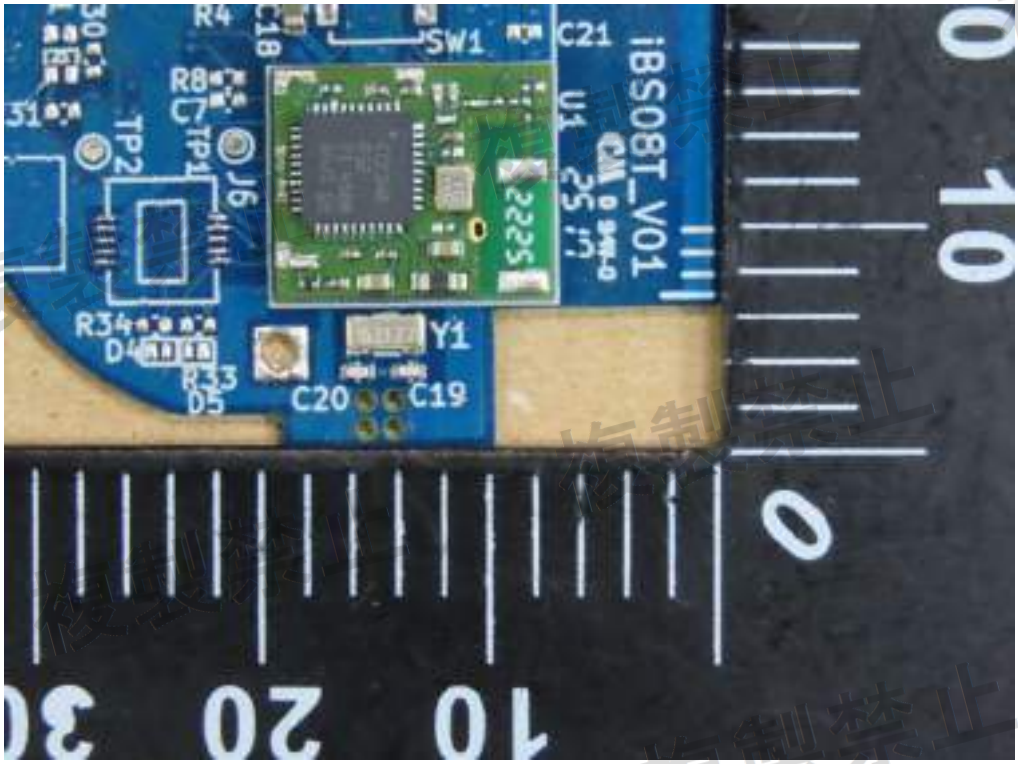


Antenna Type: Inverted F Antenna
Antenna gain: 3.3 dBi

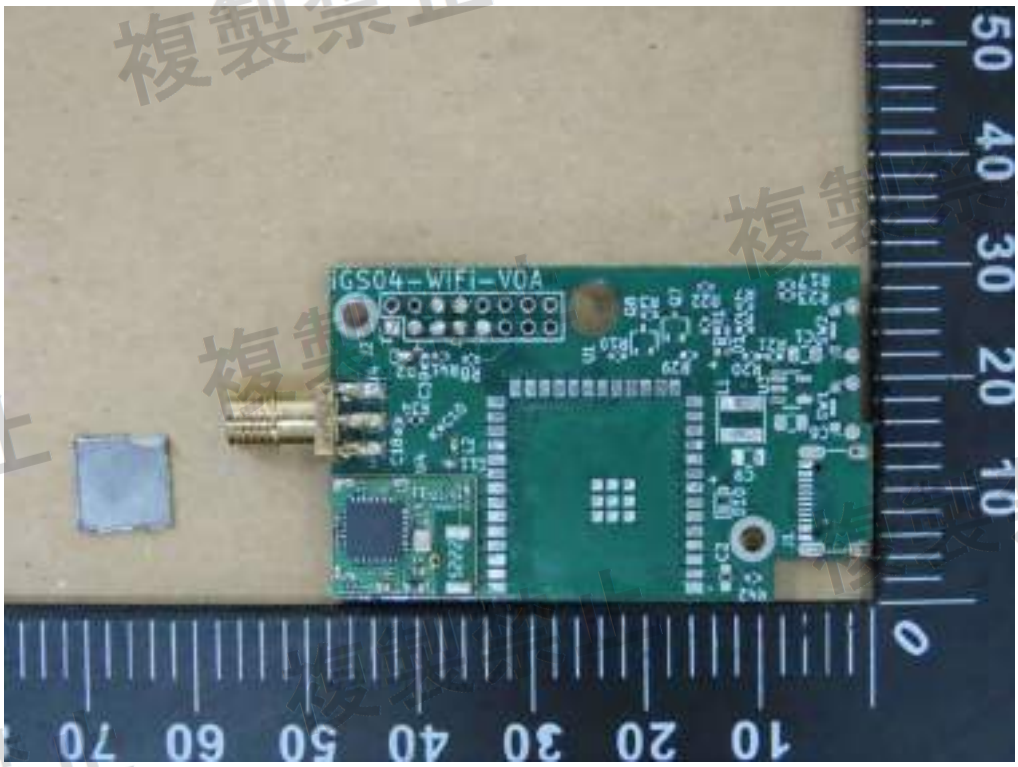

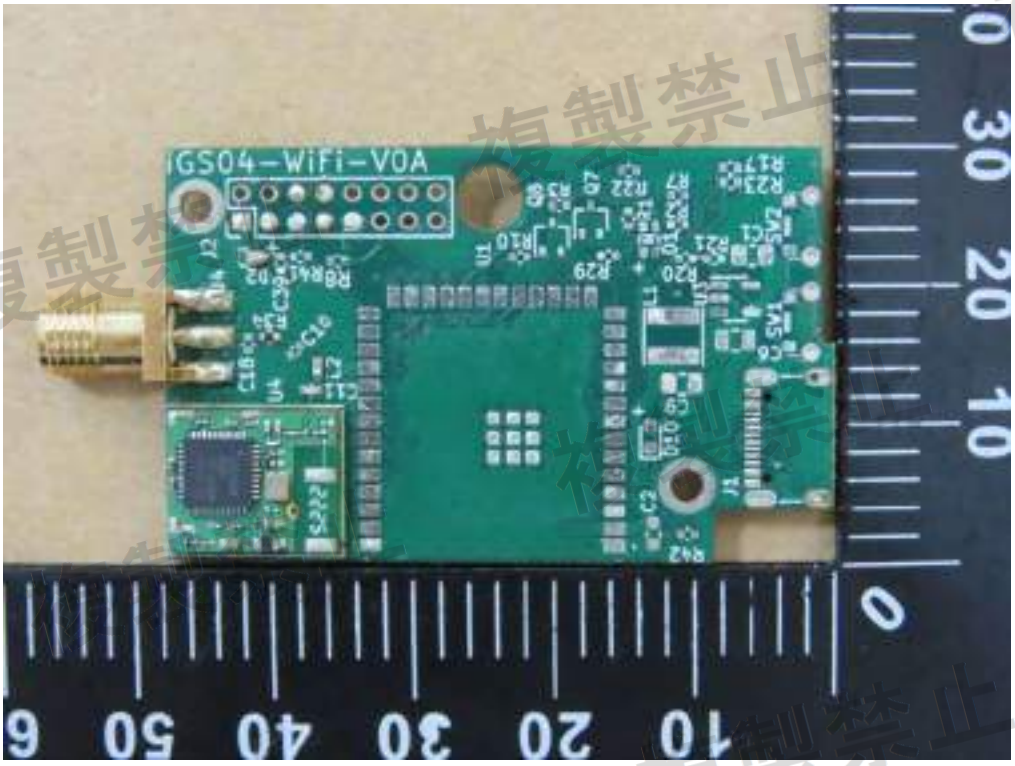
GS04-WiFi-V0A

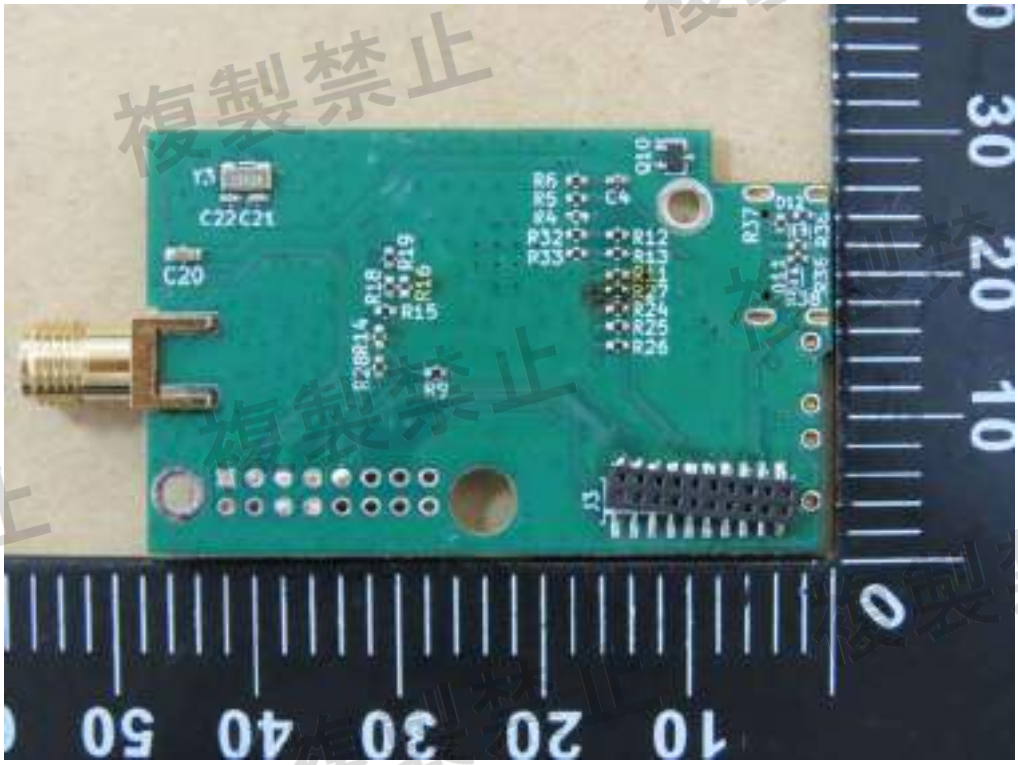
C20

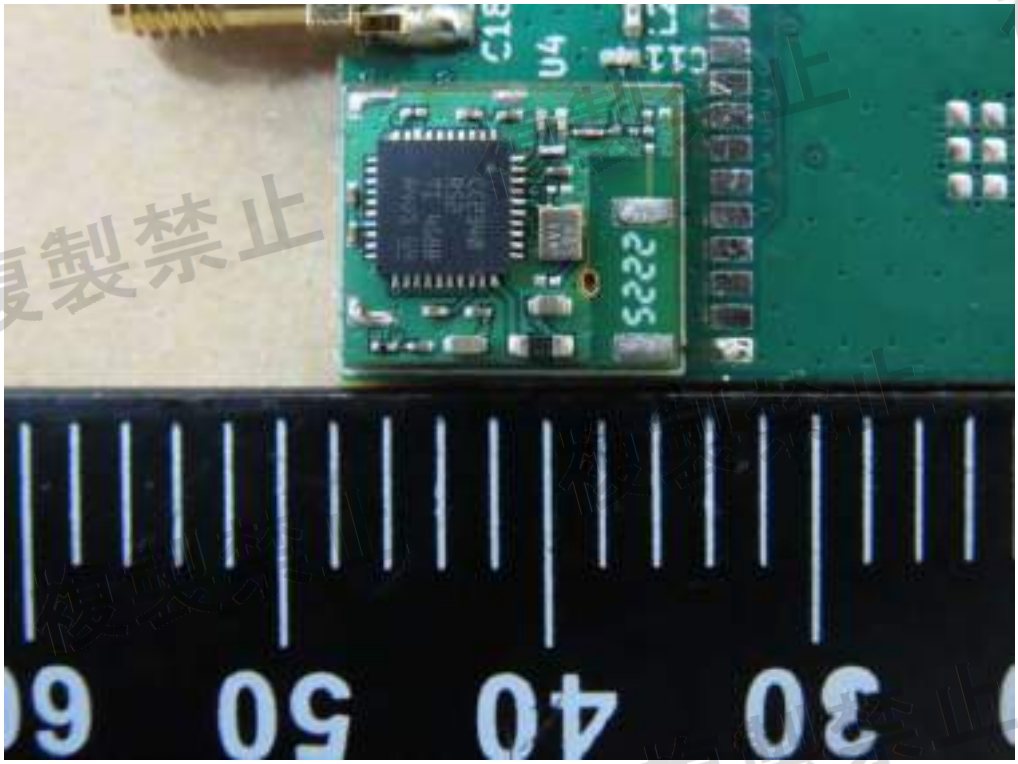

Antenna Type: External Antenna
Antenna gain: 2 dBi

複製禁止

3.2 Frequency Tolerance

Test date: October 04, 2025
Temperature: 24.1˚C
Humidity: 56.0%
Tester: Sora

Tolerance from nominal frequency:

Mode	Channel	Frequency Tolerance (kHz)			MAX Frequency Tolerance (ppm)	Limit (ppm)
		Vmin	Vnor	Vmax		
BLE	Ch 0 : 2402 MHz	21.955	22.115	22.436	9.3	50
	Ch 19 : 2440 MHz	23.397	23.397	23.397	9.6	
	Ch 39 : 2480 MHz	23.718	23.558	23.397	9.6	

Limits:


Under all test conditions	< 50 ppm

3.3 Occupied Bandwidth (99% channel power bandwidth)

Test date: October 04, 2025
Temperature: 24.1˚C
Humidity: 56.0%
Tester: Sora


1M

Occupied Bandwidth			
Test Freq		Test Volt	measure value(MHz)
BLE 1M	CH 0 2402 MHz	Vmin	1.362179487
	CH 19 2440 MHz		1.378205128
	CH 39 2480 MHz		1.362179487
BLE 1M	CH 0 2402 MHz	Vnor	1.362179487
	CH 19 2440 MHz		1.378205128
	CH 39 2480 MHz		1.362179487
BLE 1M	CH 0 2402 MHz	Vmax	1.362179487
	CH 19 2440 MHz		1.370192308
	CH 39 2480 MHz		1.370192308

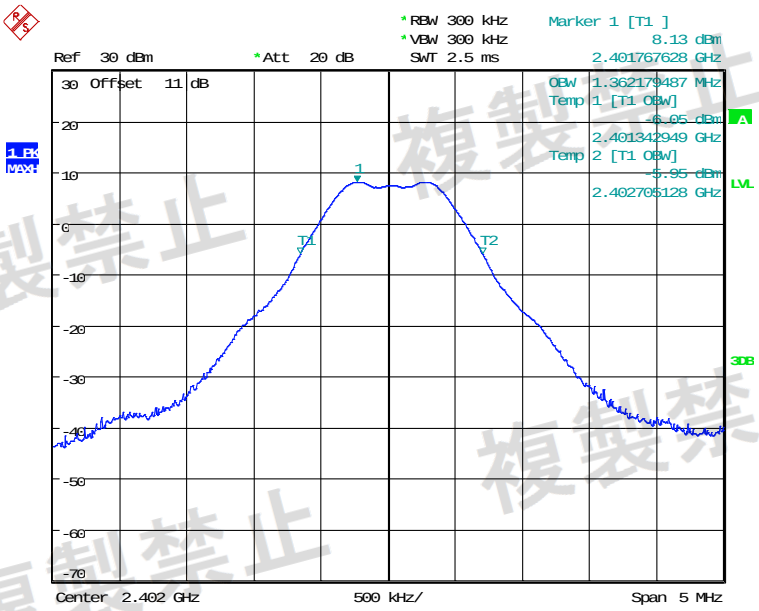


OCCUPIED BANDWIDTH BLE 1M CH00 3.0V

Date: 4.OCT.2025 14:54:37

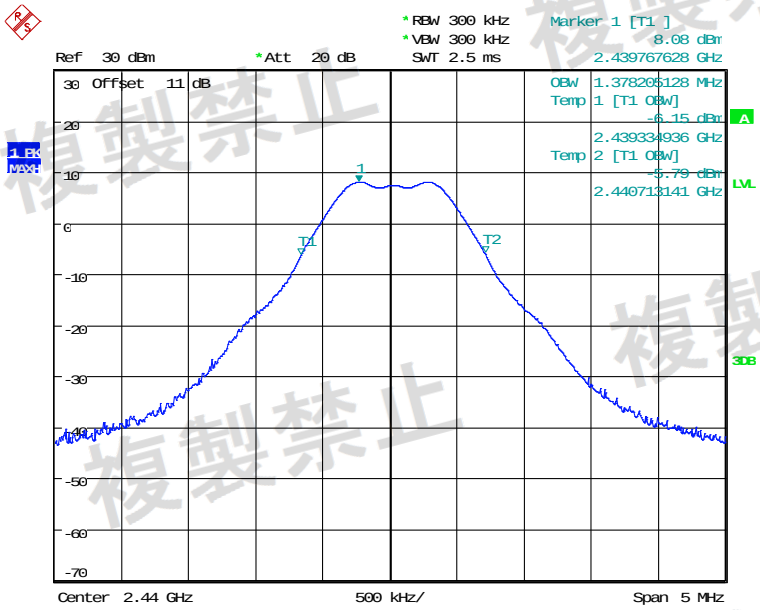


OCCUPIED BANDWIDTH BLE 1M CH19 3.0V

Date: 4.OCT.2025 14:55:11

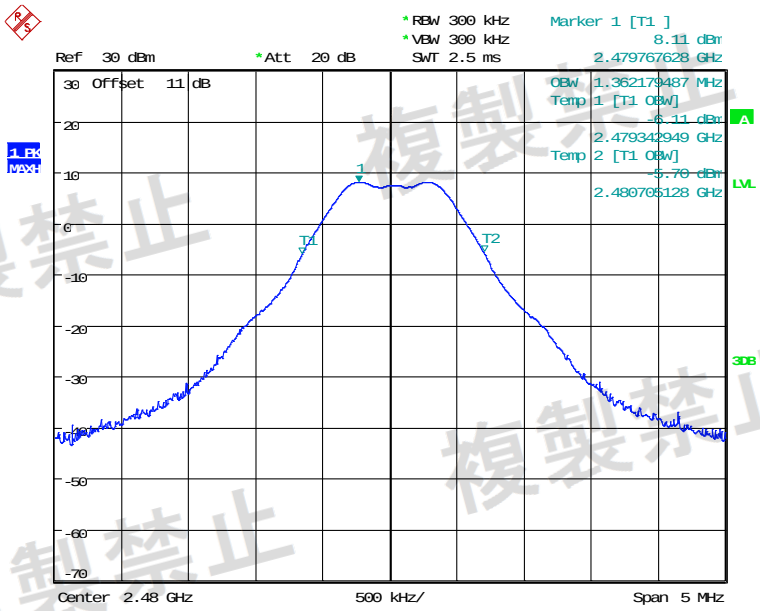


OCCUPIED BANDWIDTH BLE 1M CH39 3.0V

Date: 4.OCT.2025 14:54:09

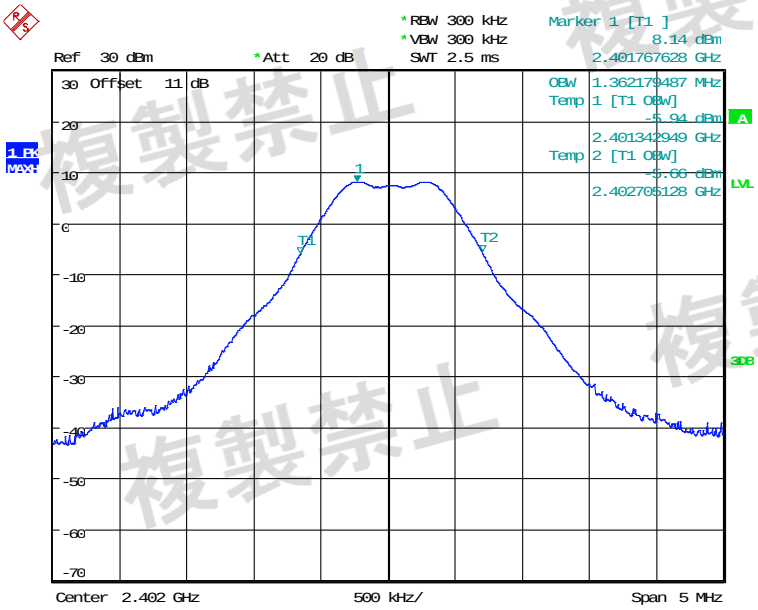


OCCUPIED BANDWIDTH BLE 1M CH00 2.7V


Date: 4.OCT.2025 15:04:39

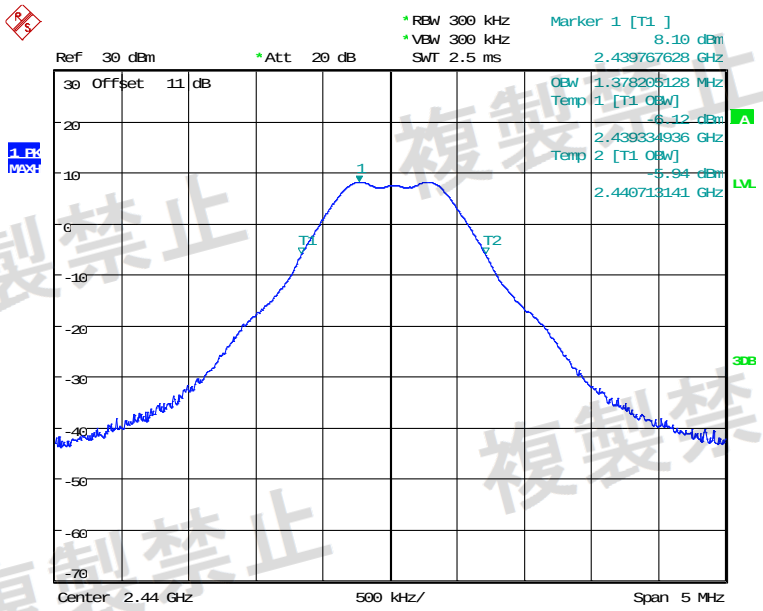

OCCUPIED BANDWIDTH BLE 1M CH19 2.7V
Date: 4.OCT.2025 15:05:14

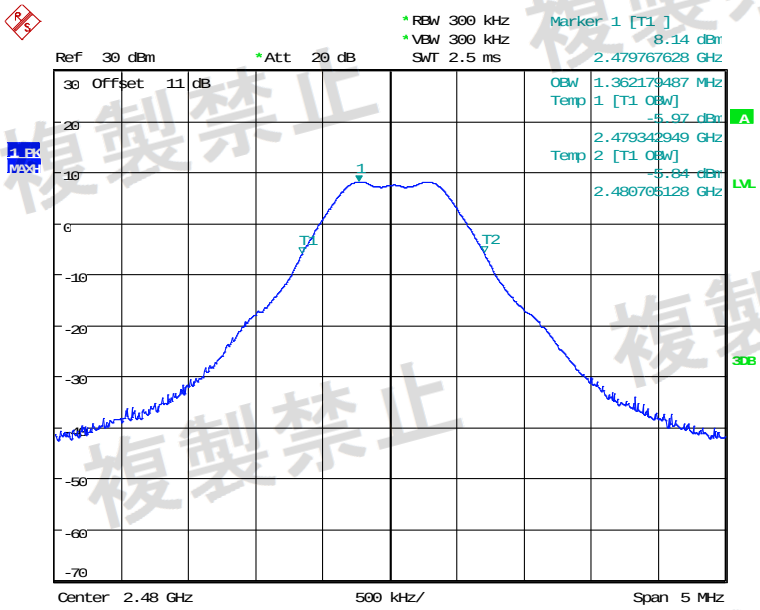


OCCUPIED BANDWIDTH BLE 1M CH39 2.7V
Date: 4.OCT.2025 15:04:02

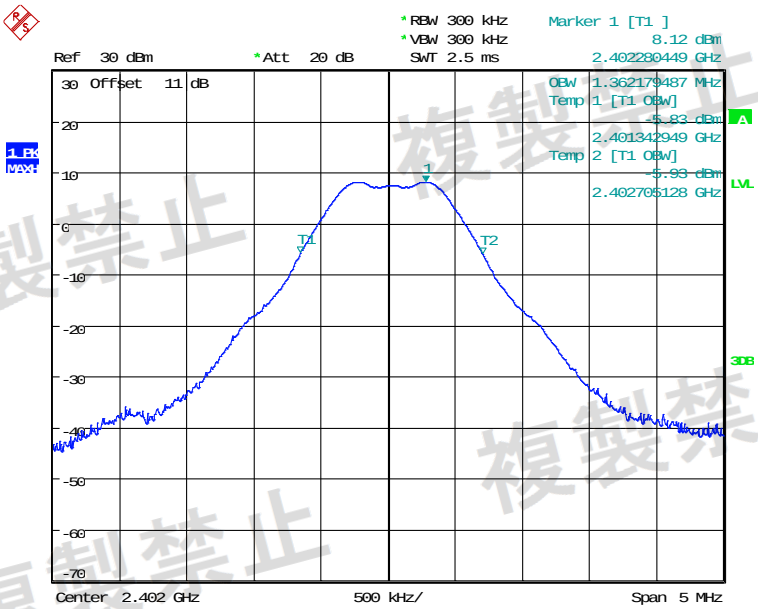


OCCUPIED BANDWIDTH BLE 1M CH00 3.3V

Date: 4.OCT.2025 14:57:34

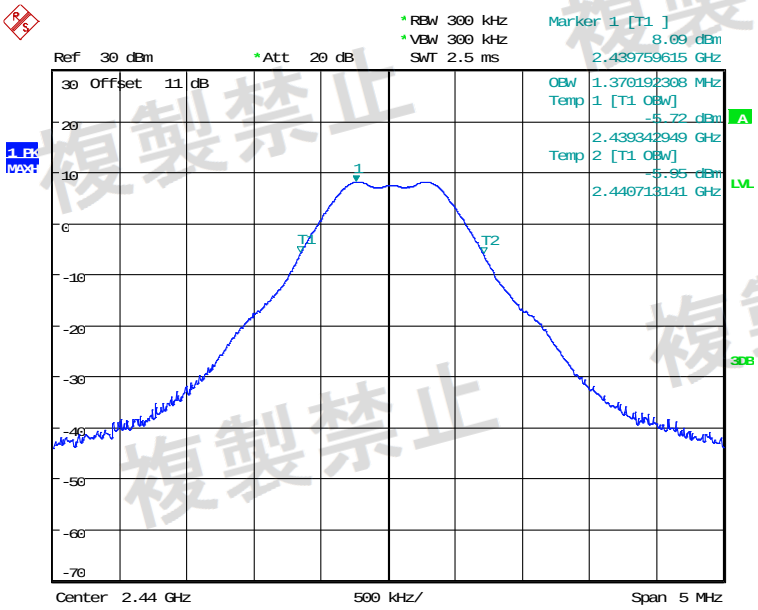

OCCUPIED BANDWIDTH BLE 1M CH19 3.3V


Date: 4.OCT.2025 14:57:08

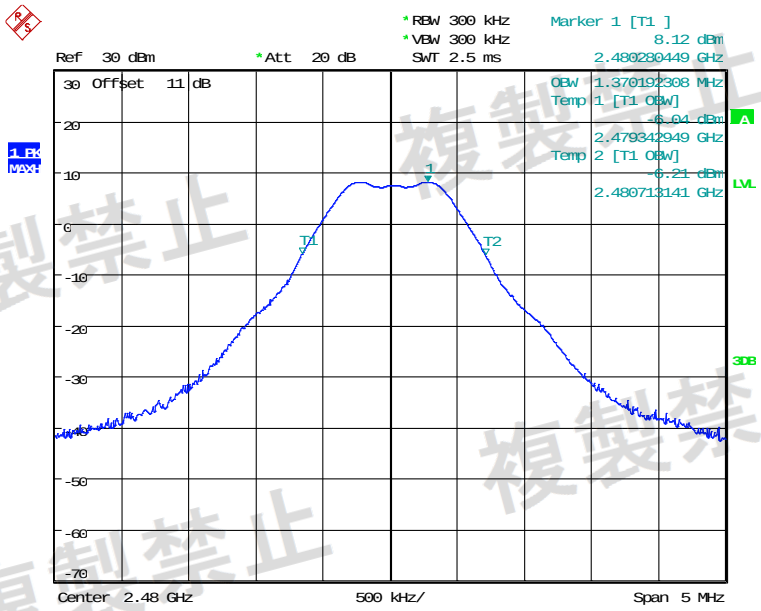

OCCUPIED BANDWIDTH BLE 1M CH39 3.3V
Date: 4.OCT.2025 14:58:08


2M

Occupied Bandwidth			
Test Freq		Test Volt	measure value(MHz)
BLE 2M	CH 0 2402 MHz	Vmin	2.195512821
	CH 19 2440 MHz		2.195512821
	CH 39 2480 MHz		2.227564103
BLE 2M	CH 0 2402 MHz	Vnor	2.195512821
	CH 19 2440 MHz		2.195512821
	CH 39 2480 MHz		2.227564103
BLE 2M	CH 0 2402 MHz	Vmax	2.195512821
	CH 19 2440 MHz		2.195512821
	CH 39 2480 MHz		2.195512821

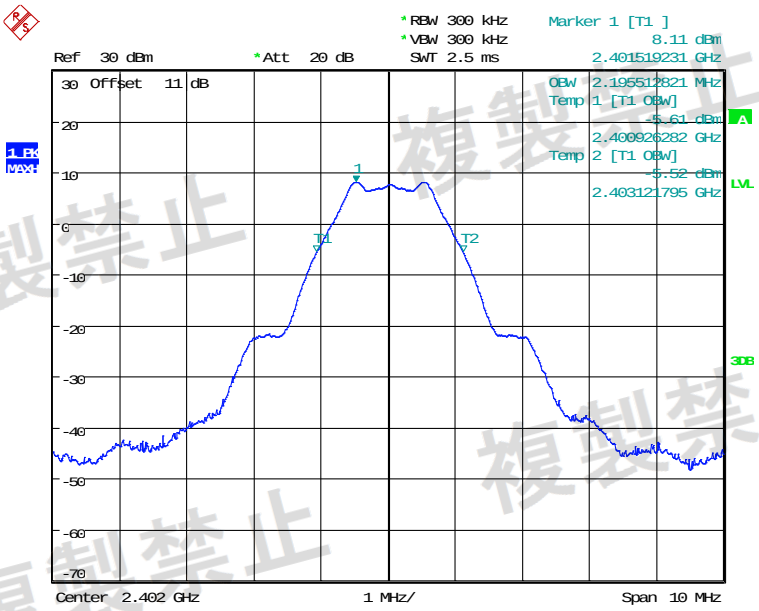


OCCUPIED BANDWIDTH BLE 2M CH00 3.0V

Date: 4.OCT.2025 14:52:38

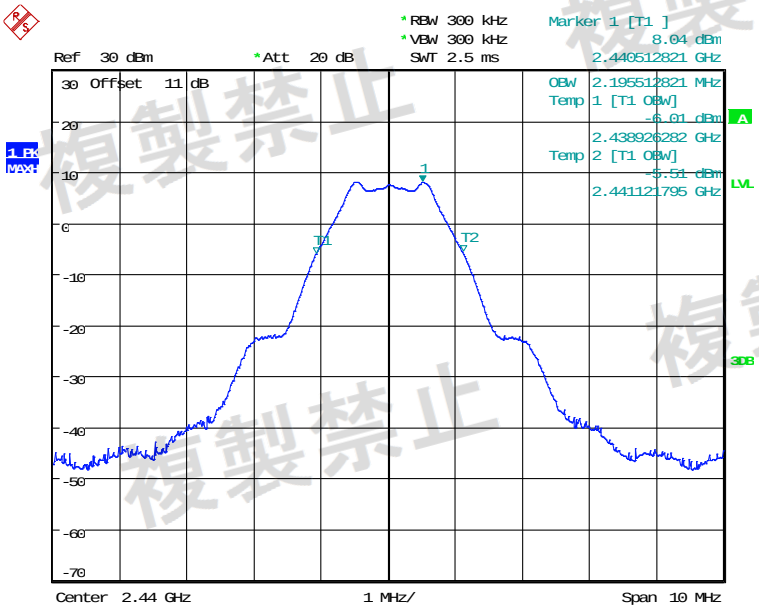


OCCUPIED BANDWIDTH BLE 2M CH19 3.0V

Date: 4.OCT.2025 14:53:03

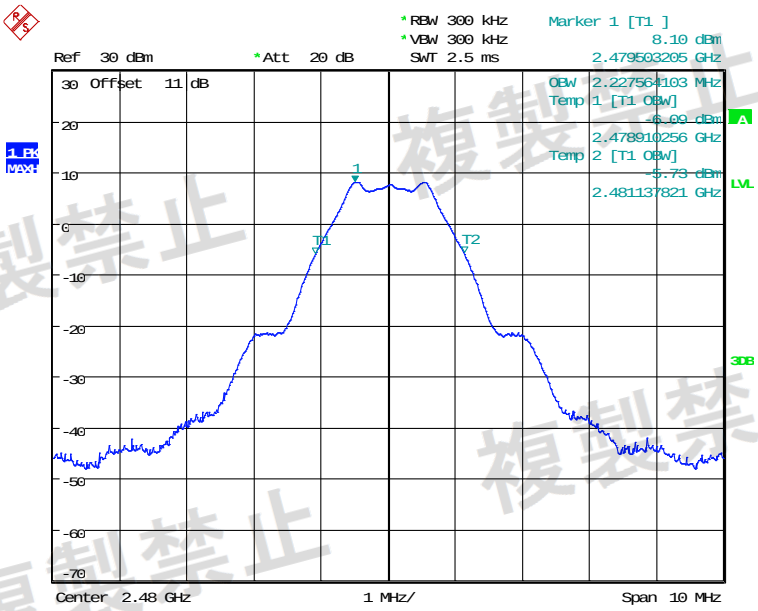


OCCUPIED BANDWIDTH BLE 2M CH39 3.0V

Date: 4.OCT.2025 14:53:40

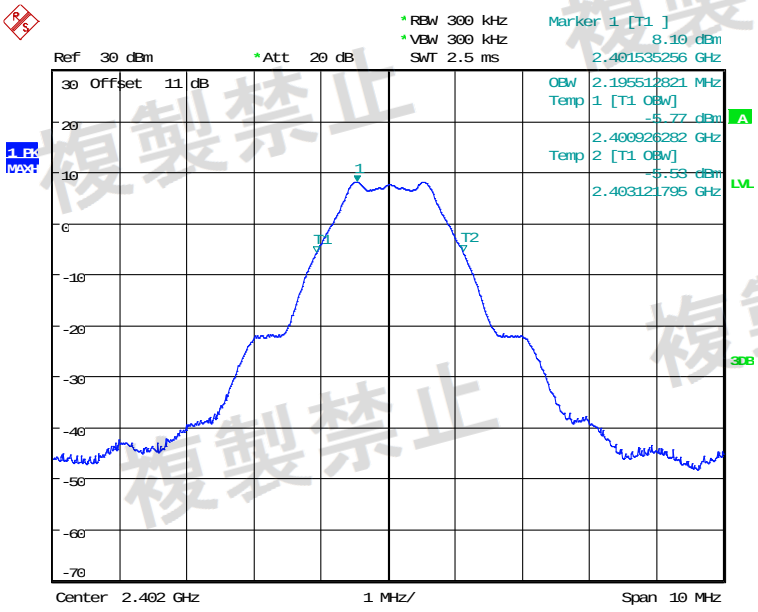


OCCUPIED BANDWIDTH BLE 2M CH00 2.7V

Date: 4.OCT.2025 15:01:43

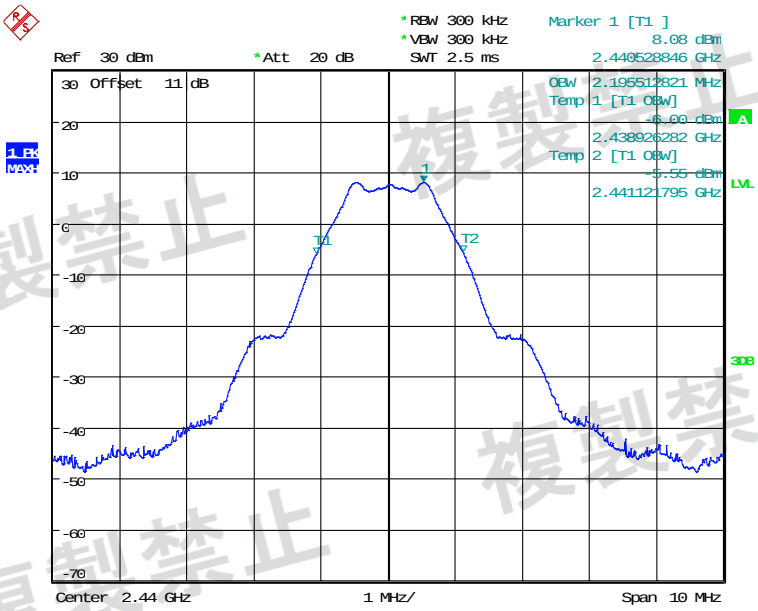


OCCUPIED BANDWIDTH BLE 2M CH19 2.7V

Date: 4.OCT.2025 15:01:04

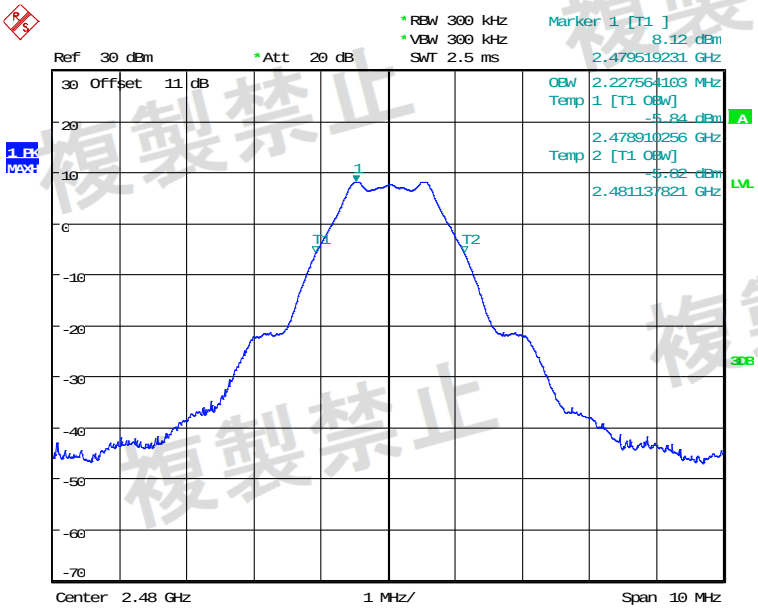


OCCUPIED BANDWIDTH BLE 2M CH39 2.7V

Date: 4.OCT.2025 15:03:28

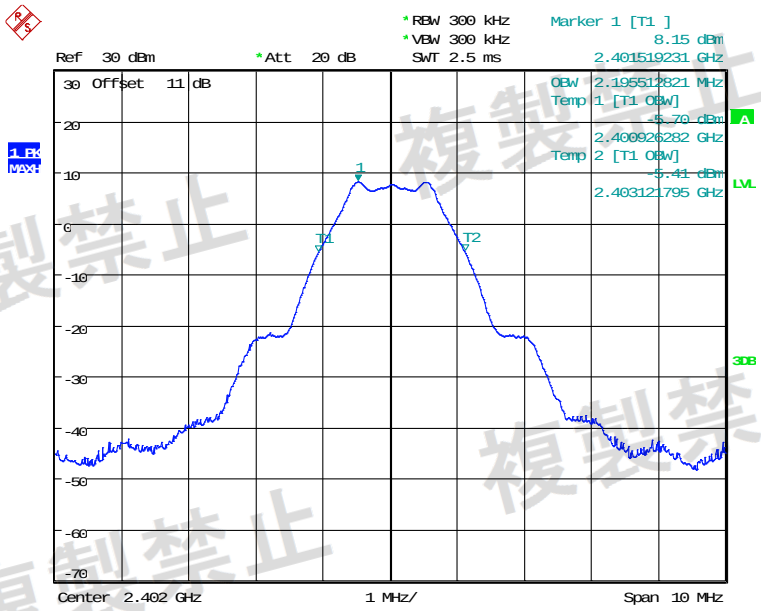


OCCUPIED BANDWIDTH BLE 2M CH00 3.3V

Date: 4.OCT.2025 14:59:09

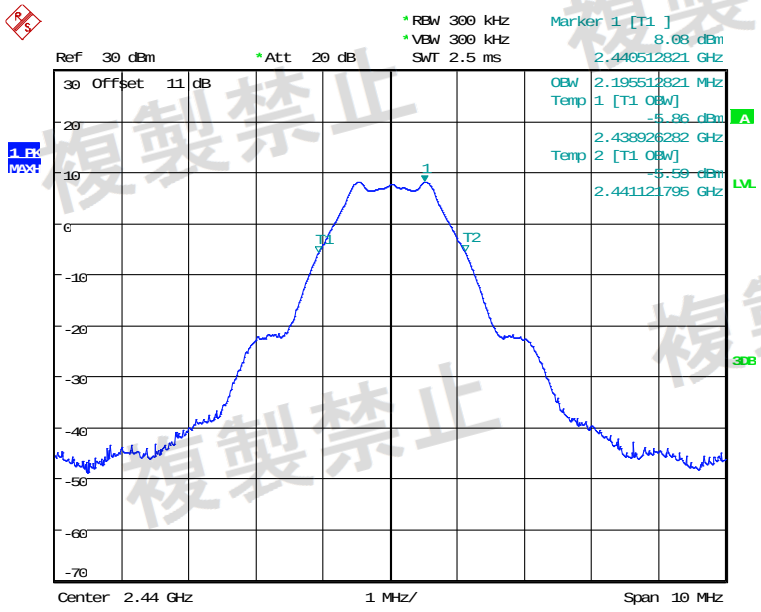

OCCUPIED BANDWIDTH BLE 2M CH19 3.3V

Date: 4.OCT.2025 14:59:44

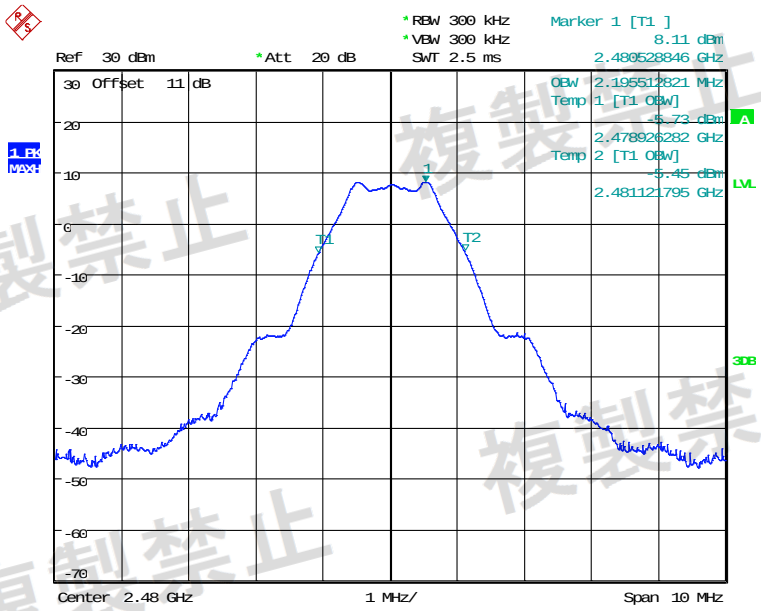

OCCUPIED BANDWIDTH BLE 2M CH39 3.3V
Date: 4.OCT.2025 14:58:37


Limits:

Under all test conditions	Occupied bandwidth: ≤ 83.5 MHz

Explanation: ./.

3.4 Spurious emissions (conducted)_ transmitter

Chip Antenna

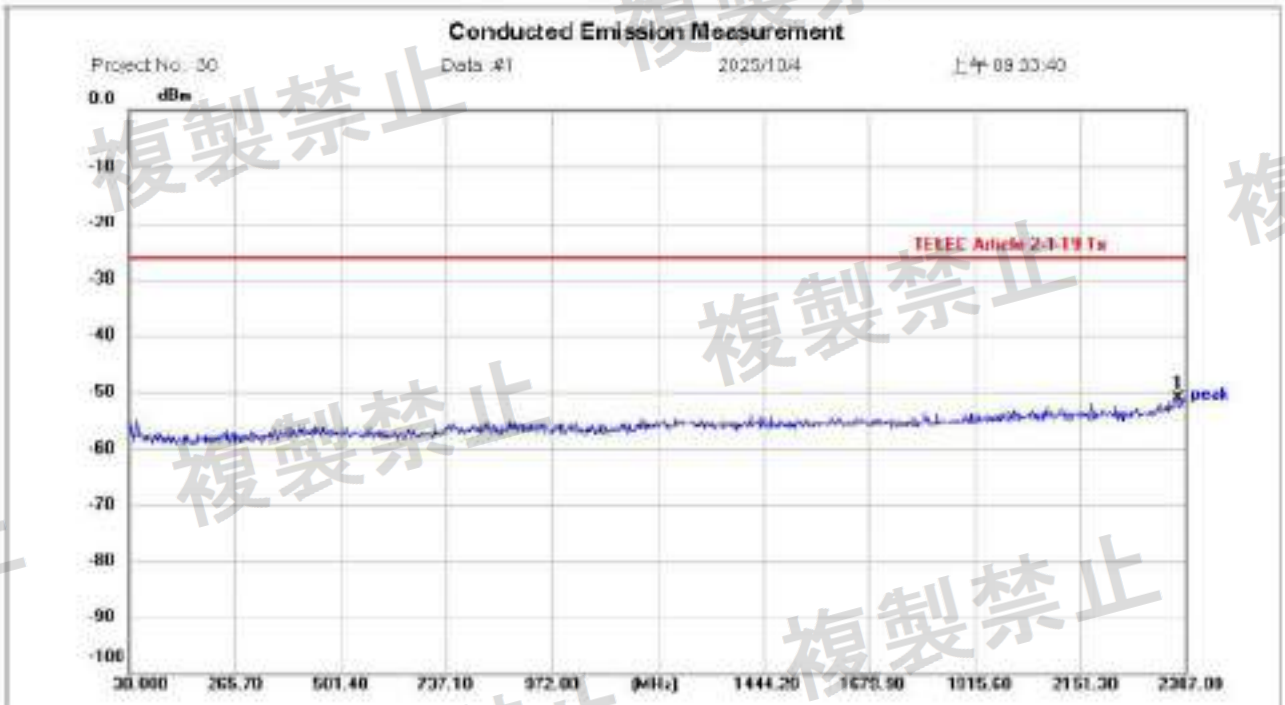


Site: Chamber 04
Limit: TELEC Article 2-1-19 Tx
EUT: W6M22508-24659
M/N:
Mode: Tx BLE 1M CH00
Note:

Polarization:
Power: 3 Vdc
Distance:

Temperature: 25.8 (°C)
Humidity: 56 %RH

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1 *	2388.144	-61.40	10.35	-51.05	-26.00	-25.05	peak			P	

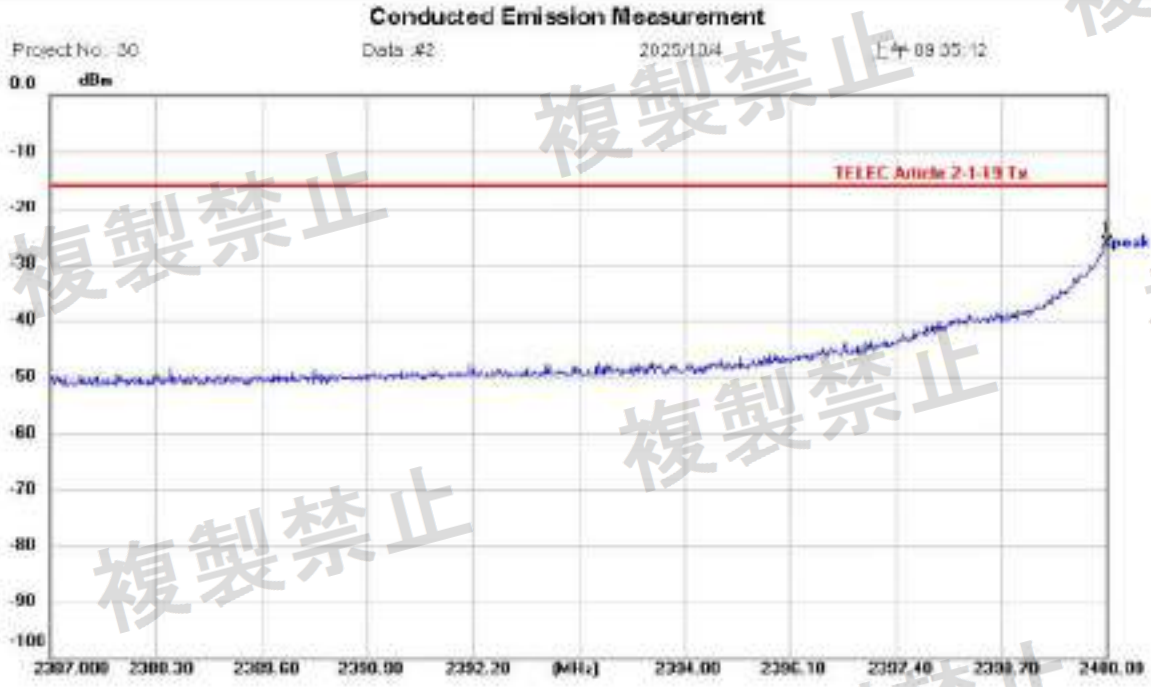


Site: Chamber 04
Limit: TELEC Article 2-1-19 Tx
EUT: W6M22508-24659
M/N:
Mode: Tx BLE 1M CH00
Note:

Polarization:
Power: 3 Vd.c.
Distance:

Temperature: 25.8 (C)
Humidity: 56 %RH

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1 *	2400.000	-36.72	10.36	-26.36	-16.00	-10.36	peak			P	

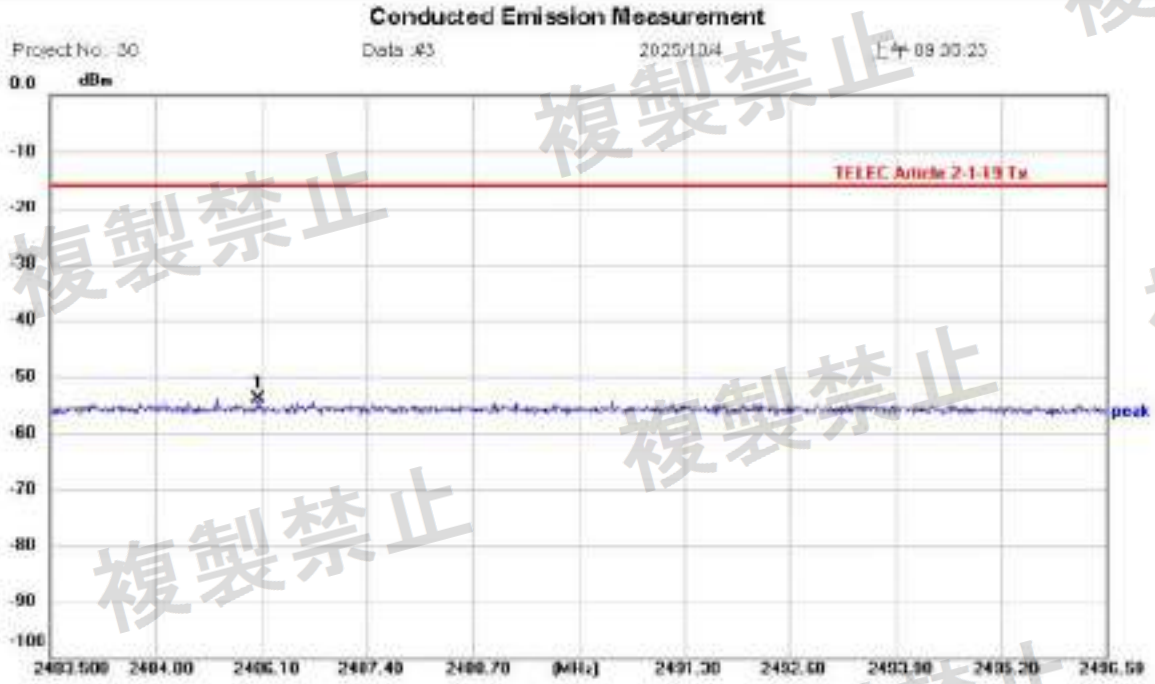


Site: Chamber 04
Limit: TELEC Article 2-1-19 Tx
EUT: W6M22508-24659
M/N:
Mode: Tx BLE 1M CH00
Note:

Polarization:
Power: 3 Vd.c.
Distance:

Temperature: 25.8 (C)
Humidity: 56 %RH

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	2486.061	-64.31	10.36	-53.95	-16.00	-37.95	peak			P	

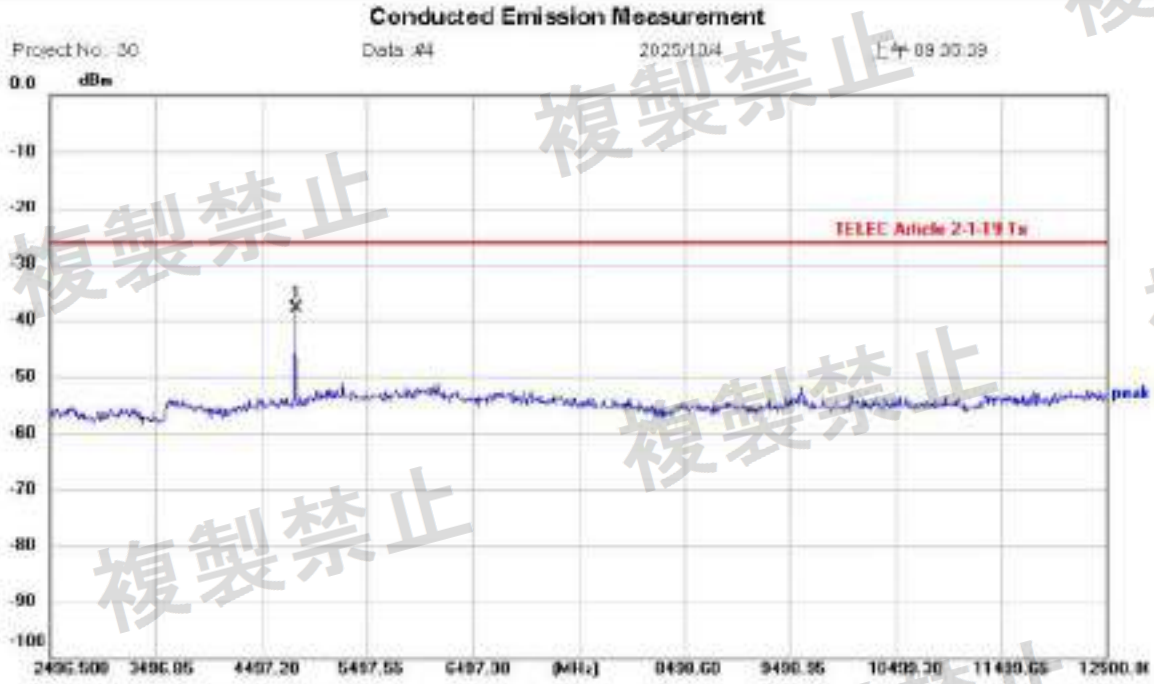


Site: Chamber 04
Limit: TELEC Article 2-1-19 Tx
EUT: W6M22508-24659
M/N:
Mode: Tx BLE 1M CH00
Note:

Polarization:
Power: 3 Vd.c.
Distance:

Temperature: 23.8 (C)
Humidity: 56 %RH

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	4807.309	-48.42	10.60	-37.82	-26.00	-11.82	peak			P	

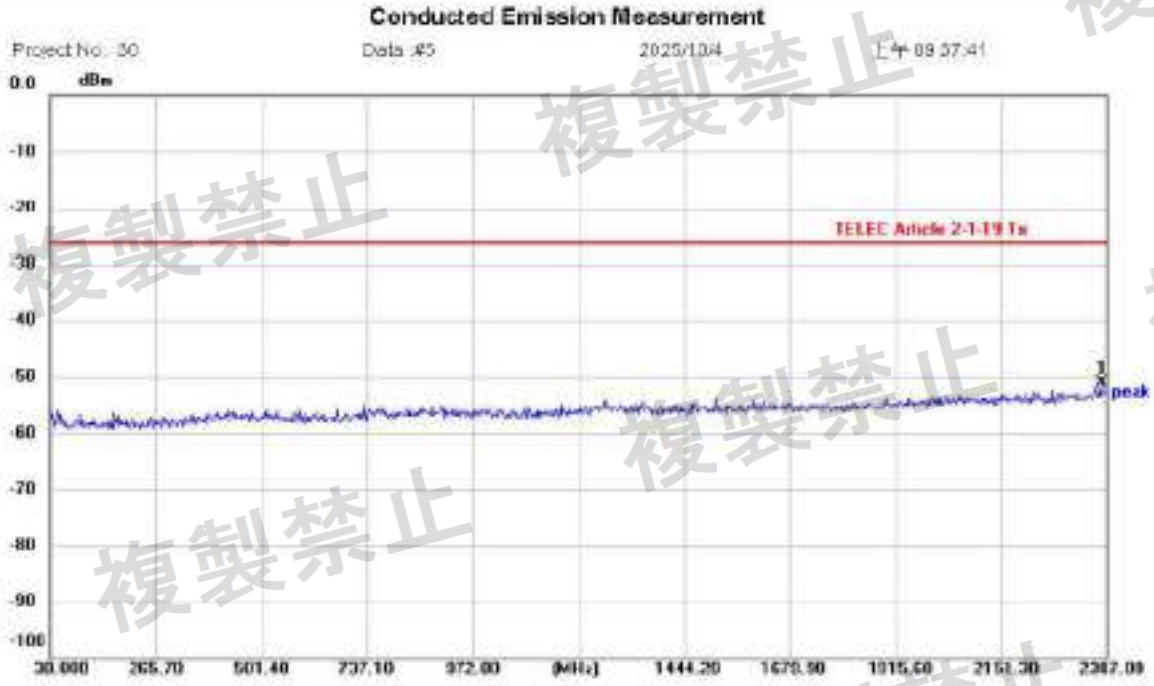


Site: Chamber 04
Limit: TELEC Article 2-1-19 Tx
EUT: W6M22508-24659
M/N:
Mode: Tx BLE 1M CH19
Note:

Polarization:
Power: 3 Vd.c.
Distance:

Temperature: 25.8 (C)
Humidity: 56 %RH

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	2375.215	-61.48	10.35	-51.13	-26.00	-25.13	peak			P	

Conducted Emission Measurement

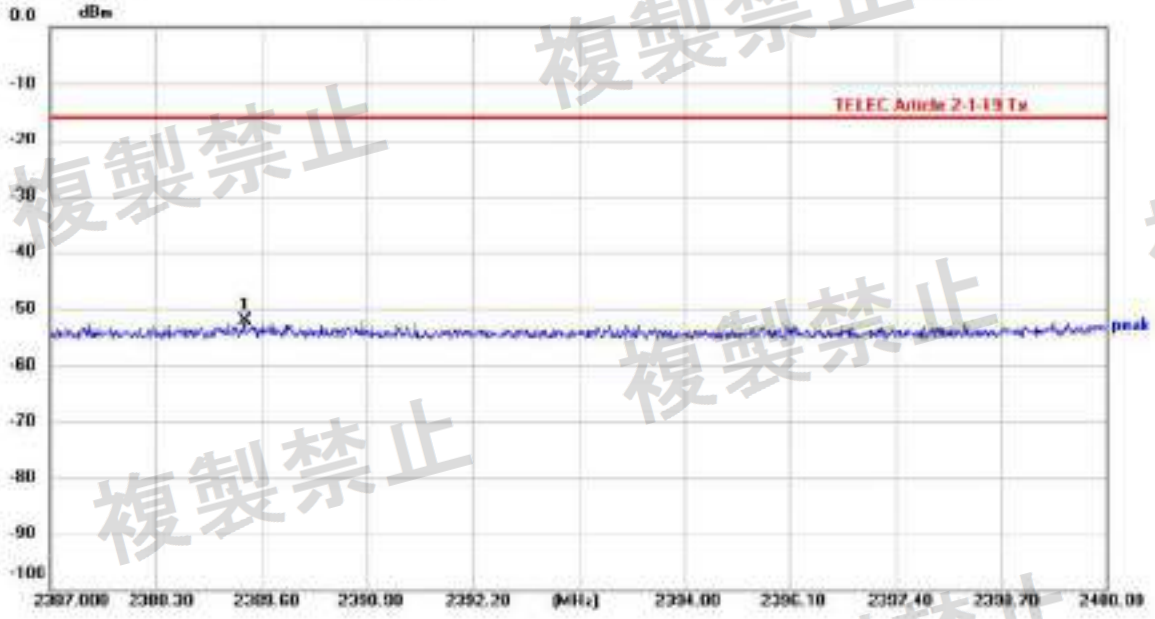


Site: Chamber 04
Limit: TELEC Article 2-1-19 Tx
EUT: W6M22508-24659
M/N:
Mode: Tx BLE 1M CH19
Note:

Polarization:
Power: 3 Vd.c.
Distance:

Temperature: 25.8 (C)
Humidity: 56 %RH

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	2389.392	-62.42	10.36	-52.06	-16.00	-36.06	peak			P	

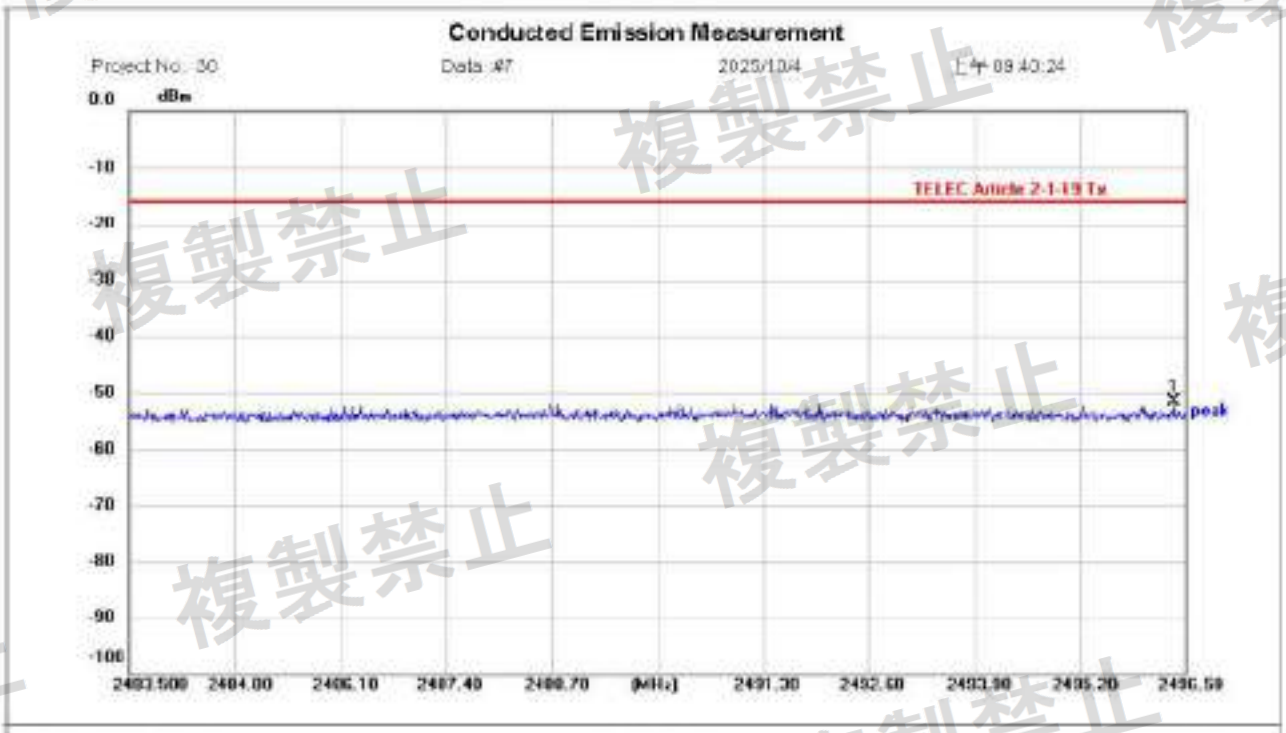


Site: Chamber 04
Limit: TELEC Article 2-1-19 Tx
EUT: W6M22508-24659
M/N:
Mode: Tx BLE 1M CH19
Note:

Polarization:
Power: 3 Vd.c.
Distance:

Temperature: 23.8 (C)
Humidity: 56 %RH

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	2496.357	-62.08	10.36	-51.72	-16.00	-35.72	peak			P	

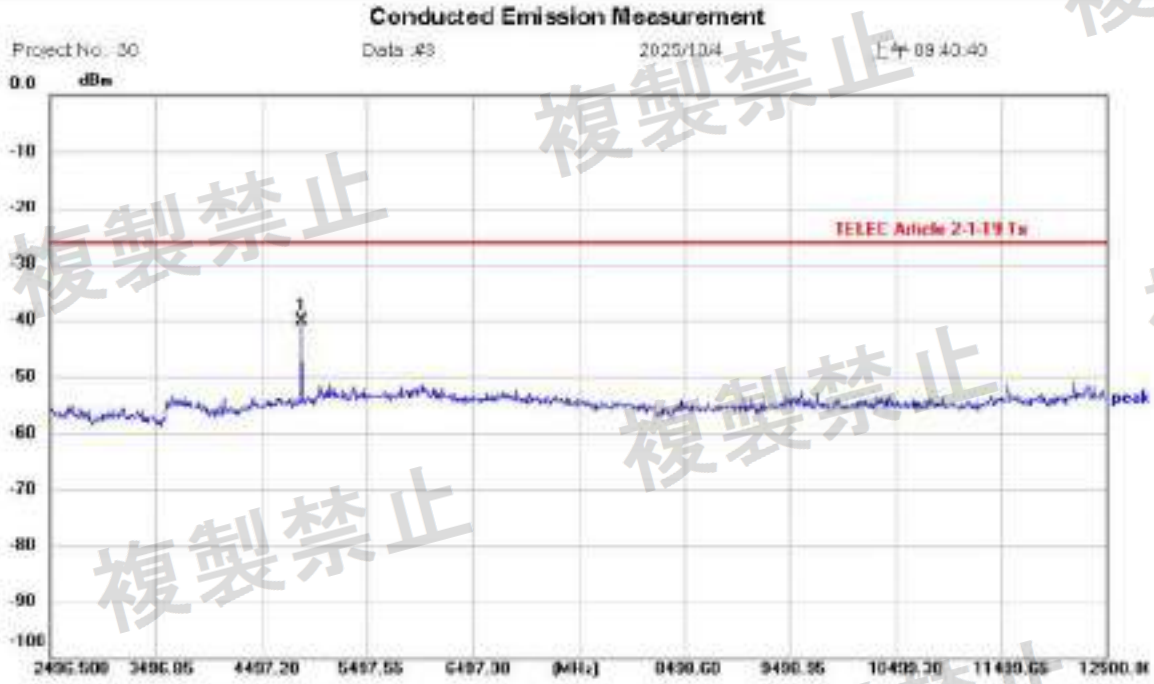


Site: Chamber 04
Limit: TELEC Article 2-1-19 Tx
EUT: W6M22508-24659
M/N:
Mode: Tx BLE 1M CH19
Note:

Polarization:
Power: 3 Vd.c.
Distance:

Temperature: 23.8 (C)
Humidity: 56 %RH

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	4877.333	-50.73	10.57	-40.16	-26.00	-14.16	peak			P	

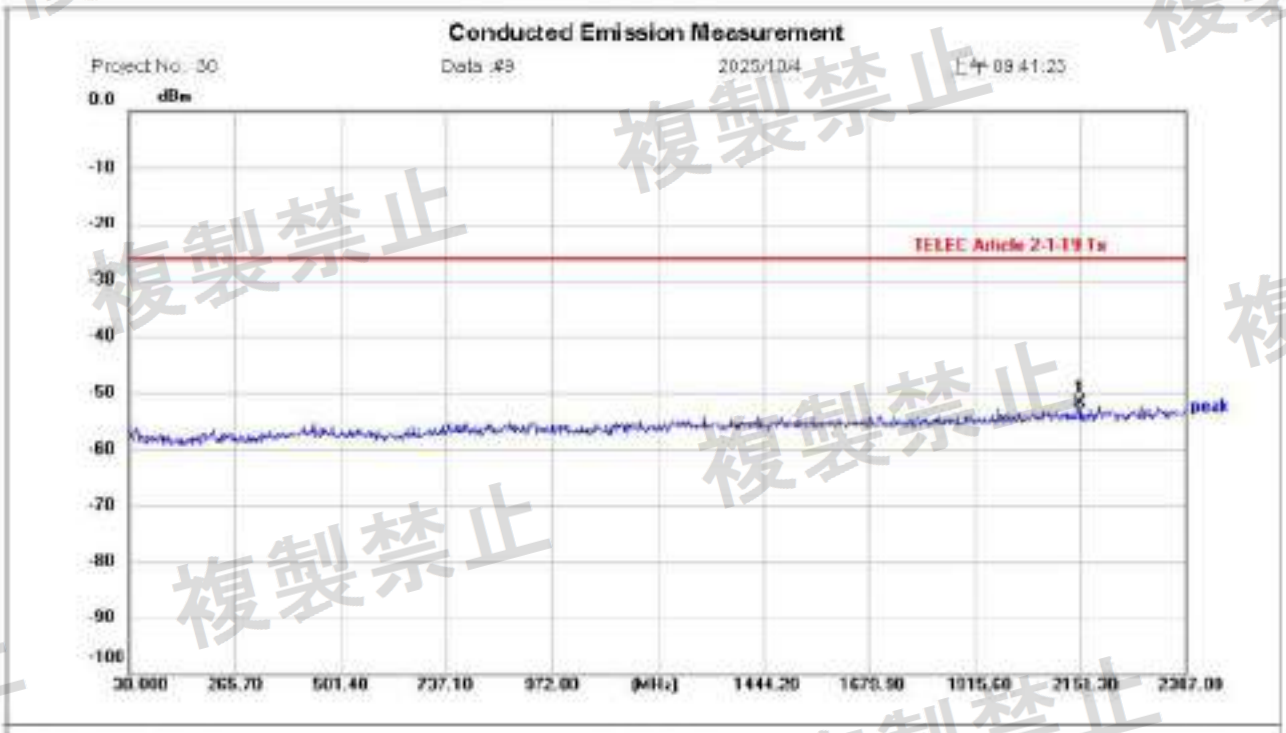


Site: Chamber 04
Limit: TELEC Article 2-1-19 Tx
EUT: W6M22508-24659
M/N:
Mode: Tx BLE 1M CH39
Note:

Polarization:
Power: 3 Vd.c.
Distance:

Temperature: 25.8 (C)
Humidity: 56 %RH

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	2146.586	-62.15	10.32	-51.83	-26.00	-25.83	peak			P	

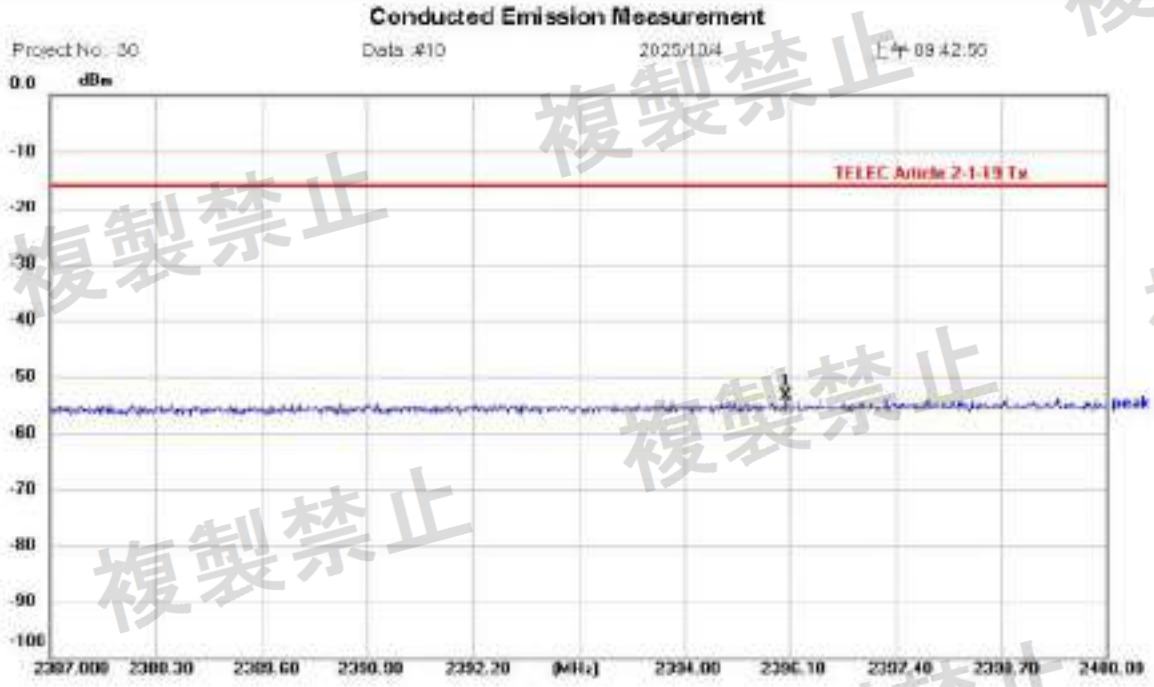


Site: Chamber 04
Limit: TELEC Article 2-1-19 Tx
EUT: W6M22508-24659
M/N:
Mode: Tx BLE 1M CH39
Note:

Polarization:
Power: 3 Vd.c.
Distance:

Temperature: 25.8 (C)
Humidity: 56 %RH

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	2396.061	-63.74	10.36	-53.38	-16.00	-37.38	peak			P	

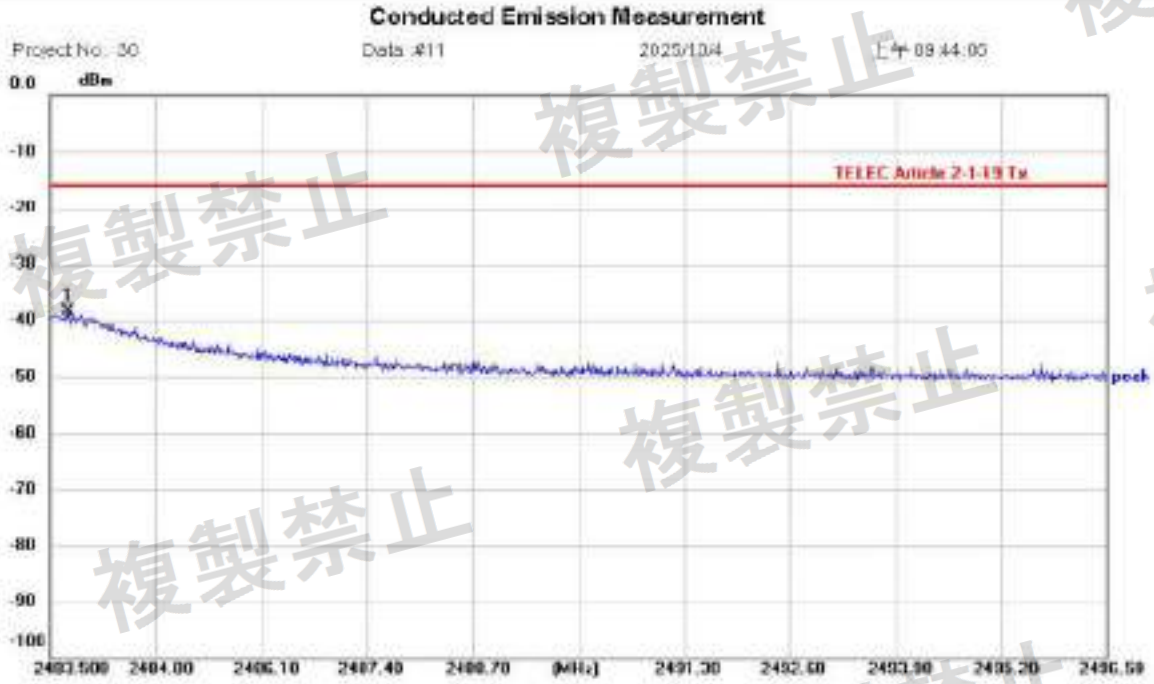


Site: Chamber 04
Limit: TELEC Article 2-1-19 Tx
EUT: W6M22508-24659
M/N:
Mode: Tx BLE 1M CH39
Note:

Polarization:
Power: 3 Vd.c.
Distance:

Temperature: 25.8 (C)
Humidity: 56 %RH

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	2483.706	-48.81	10.36	-38.45	-16.00	-22.45	peak			P	

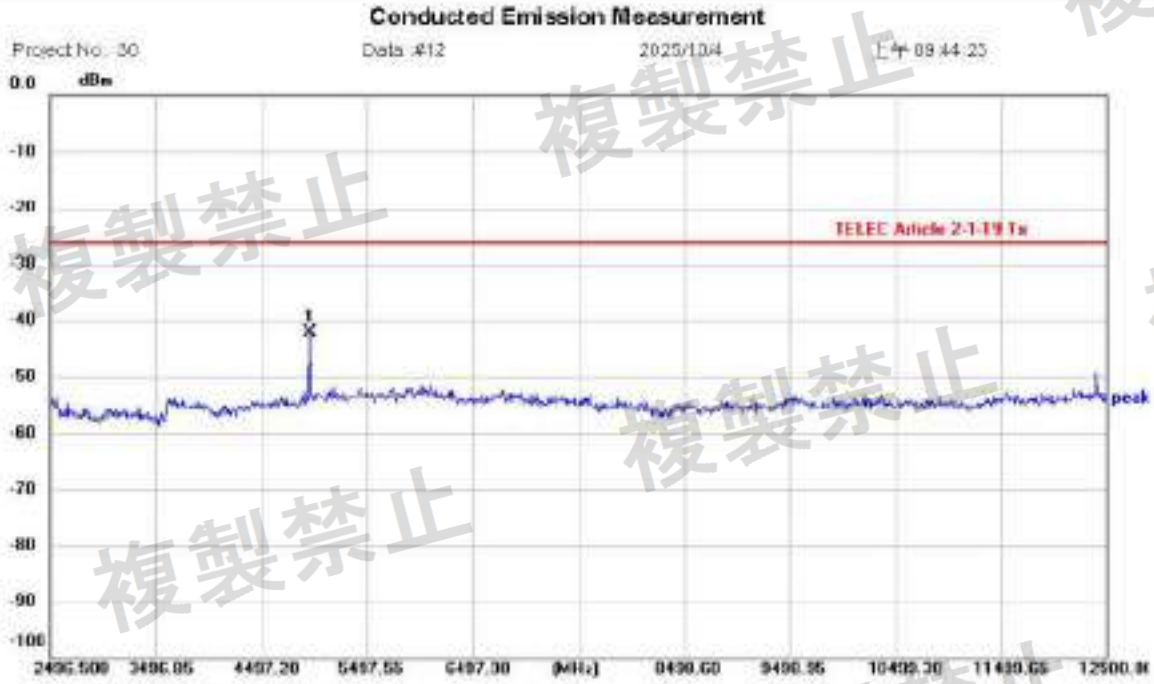


Site: Chamber 04
Limit: TELEC Article 2-1-19 Tx
EUT: W6M22508-24659
M/N:
Mode: Tx BLE 1M CH39
Note:

Polarization:
Power: 3 Vd.c.
Distance:

Temperature: 23.8 (C)
Humidity: 56 %RH

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	4957.361	-52.71	10.61	-42.10	-26.00	-16.10	peak			P	

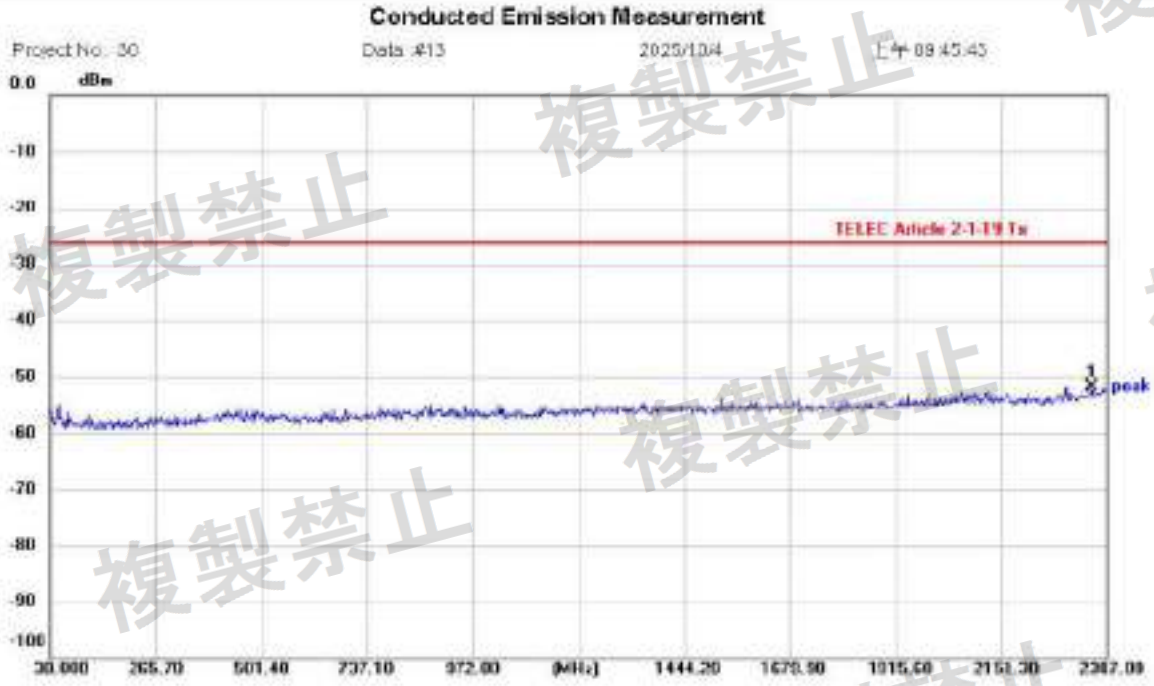


Site: Chamber 04
Limit: TELEC Article 2-1-19 Tx
EUT: W6M22508-24659
M/N:
Mode: Tx BLE 2M CH00
Note:

Polarization:
Power: 3 Vd.c.
Distance:

Temperature: 23.8 (C)
Humidity: 56 %RH

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	2351.645	-62.18	10.35	-51.83	-26.00	-25.83	peak			P	

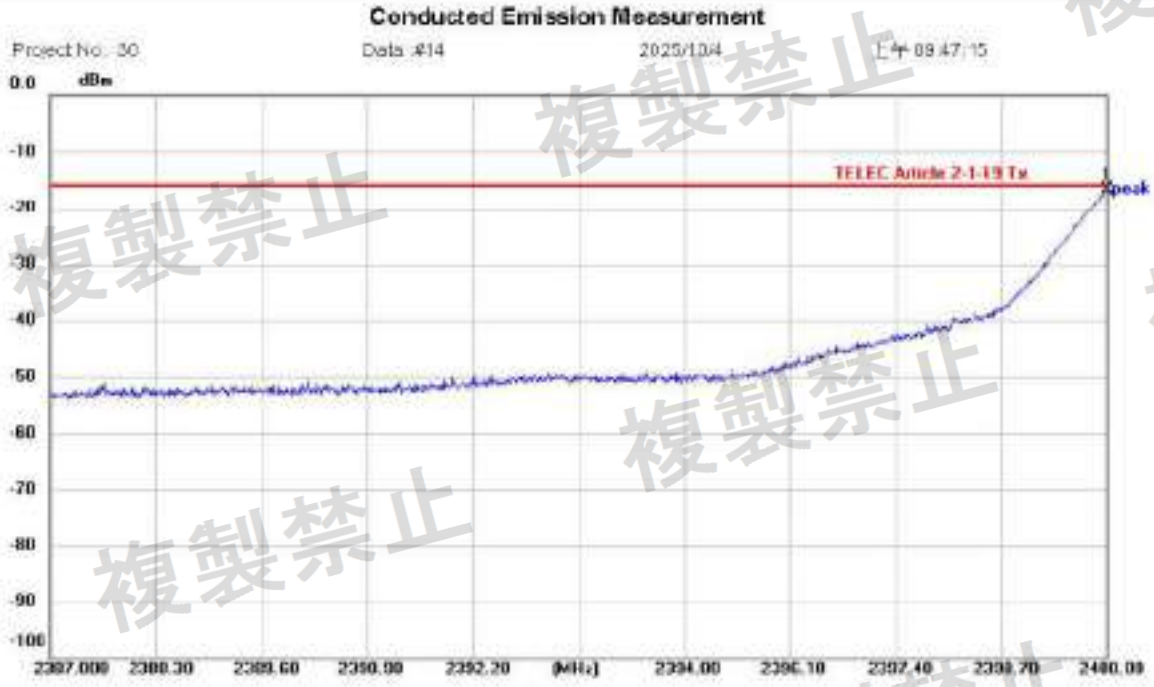


Site: Chamber 04
Limit: TELEC Article 2-1-19 Tx
EUT: W6M22508-24659
M/N:
Mode: Tx BLE 2M CH00
Note:

Polarization:
Power: 3 Vd.c.
Distance:

Temperature: 25.8 (°C)
Humidity: 56 %RH

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1 *	2400.000	-27.14	10.36	-16.78	-16.00	-0.78	peak			P	

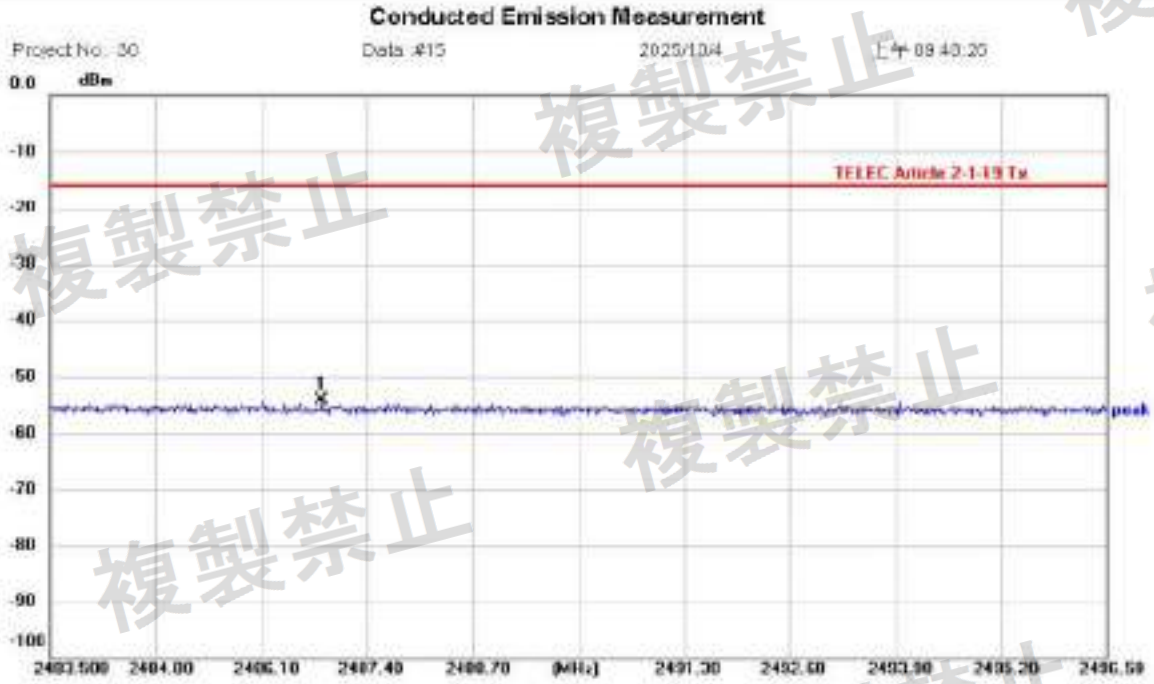


Site: Chamber 04
Limit: TELEC Article 2-1-19 Tx
EUT: W6M22508-24659
M/N:
Mode: Tx BLE 2M CH00
Note:

Polarization:
Power: 3 Vd.c.
Distance:

Temperature: 23.8 (C)
Humidity: 56 %RH

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	2486.841	-64.49	10.36	-54.13	-16.00	-38.13	peak			P	

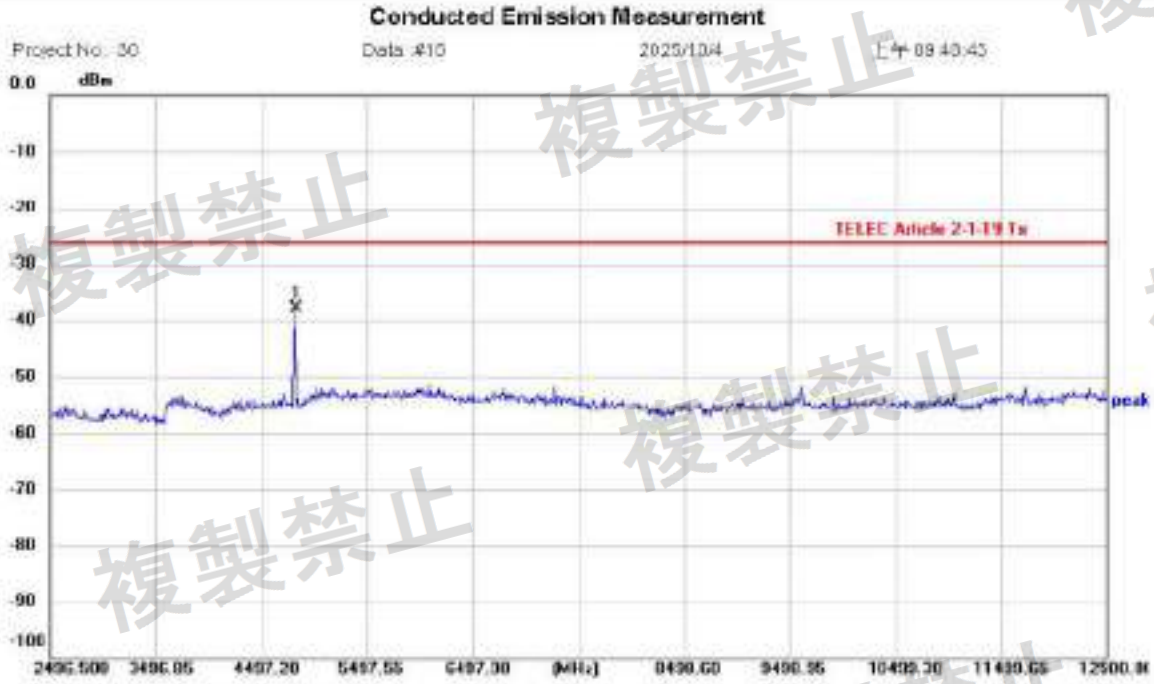


Site: Chamber 04
Limit: TELEC Article 2-1-19 Tx
EUT: W6M22508-24659
M/N:
Mode: Tx BLE 2M CH00
Note:

Polarization:
Power: 3 Vd.c.
Distance:

Temperature: 23.8 (C)
Humidity: 56 %RH

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	4807.309	-48.52	10.60	-37.92	-26.00	-11.92	peak			P	

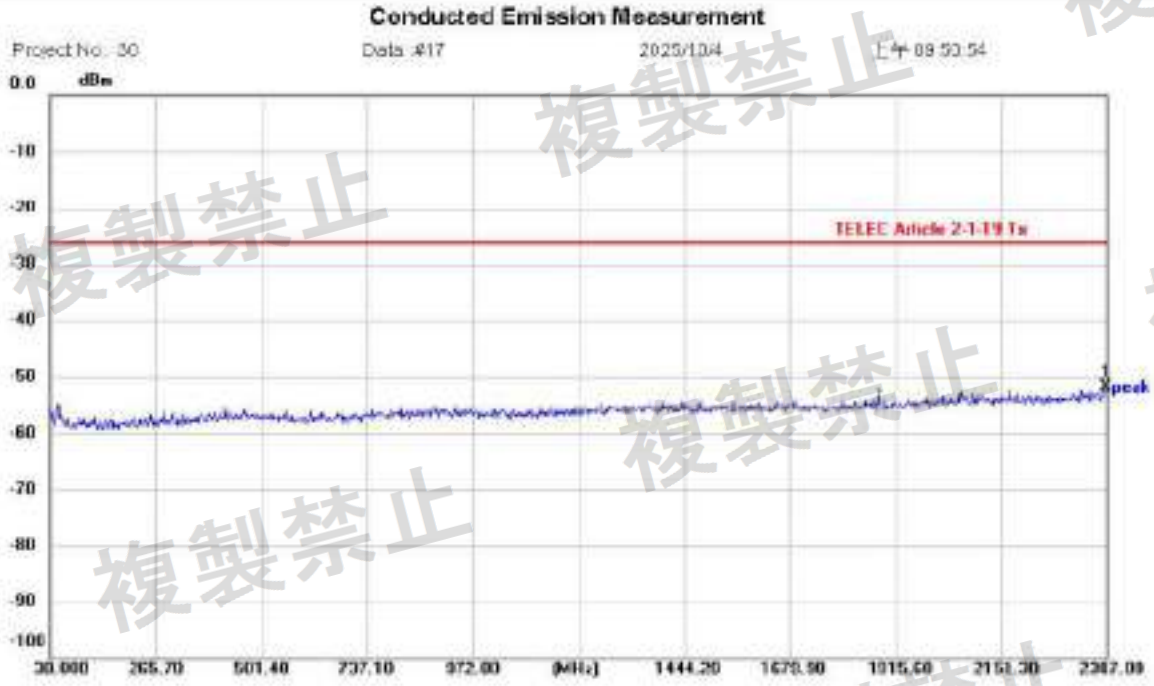


Site: Chamber 04
Limit: TELEC Article 2-1-19 Tx
EUT: W6M22508-24659
M/N:
Mode: Tx BLE 2M CH19
Note:

Polarization:
Power: 3 Vd.c.
Distance:

Temperature: 25.8 (C)
Humidity: 56 %RH

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	2384.643	-62.33	10.36	-51.97	-26.00	-25.97	peak			P	

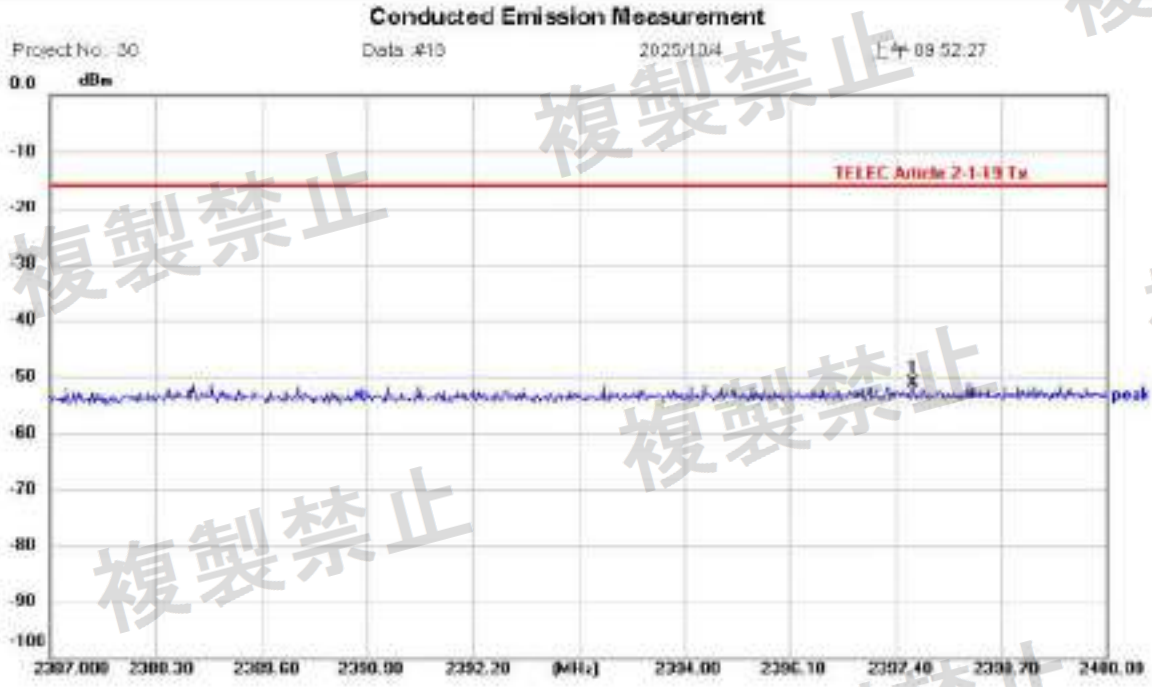


Site: Chamber 04
Limit: TELEC Article 2-1-19 Tx
EUT: W6M22508-24659
M/N:
Mode: Tx BLE 2M CH19
Note:

Polarization:
Power: 3 Vd.c.
Distance:

Temperature: 25.8 (°C)
Humidity: 56 %RH

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1 *	2397.606	-61.36	10.36	-51.00	-16.00	-35.00	peak			P	

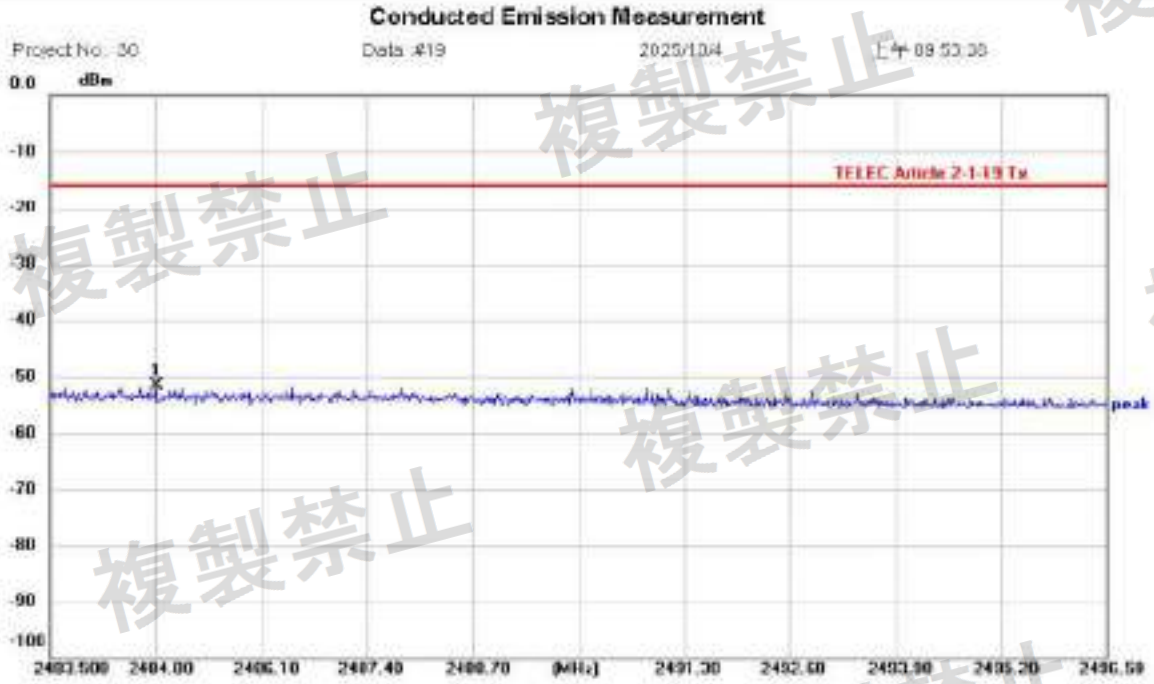


Site: Chamber 04
Limit: TELEC Article 2-1-19 Tx
EUT: W6M22508-24659
M/N:
Mode: Tx BLE 2M CH19
Note:

Polarization:
Power: 3 Vd.c.
Distance:

Temperature: 23.8 (C)
Humidity: 56 %RH

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	2484.800	-62.05	10.36	-51.69	-16.00	-35.69	peak			P	

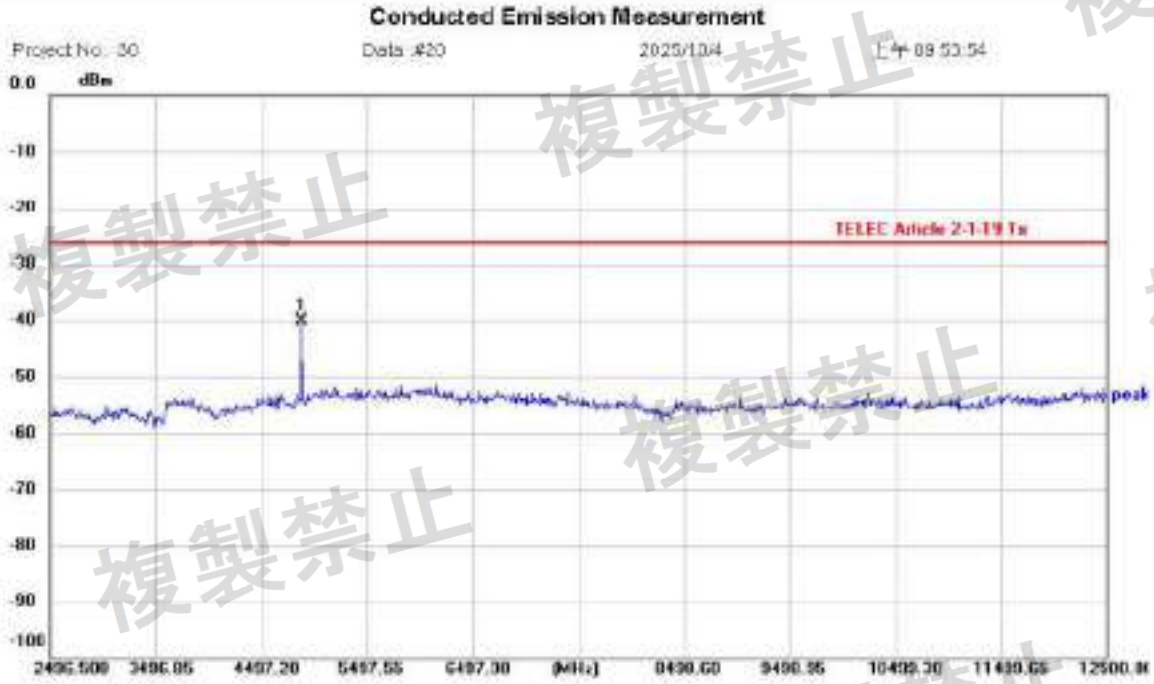


Site: Chamber 04
Limit: TELEC Article 2-1-19 Tx
EUT: W6M22508-24659
M/N:
Mode: Tx BLE 2M CH19
Note:

Polarization:
Power: 3 Vd.c.
Distance:

Temperature: 23.8 (C)
Humidity: 56 %RH

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	4877.333	-50.78	10.57	-40.21	-26.00	-14.21	peak			P	

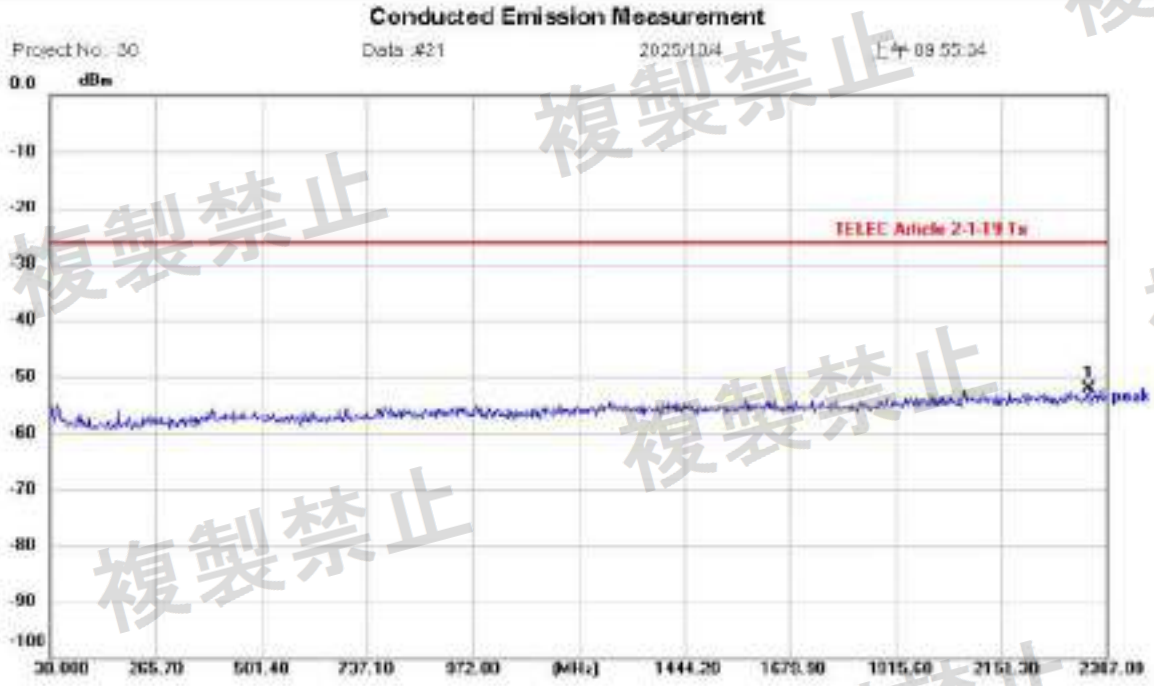


Site: Chamber 04
Limit: TELEC Article 2-1-19 Tx
EUT: W6M22508-24659
M/N:
Mode: Tx BLE 2M CH39
Note:

Polarization:
Power: 3 Vd.c.
Distance:

Temperature: 25.8 (C)
Humidity: 56 %RH

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	2346.931	-62.45	10.35	-52.10	-26.00	-26.10	peak			P	

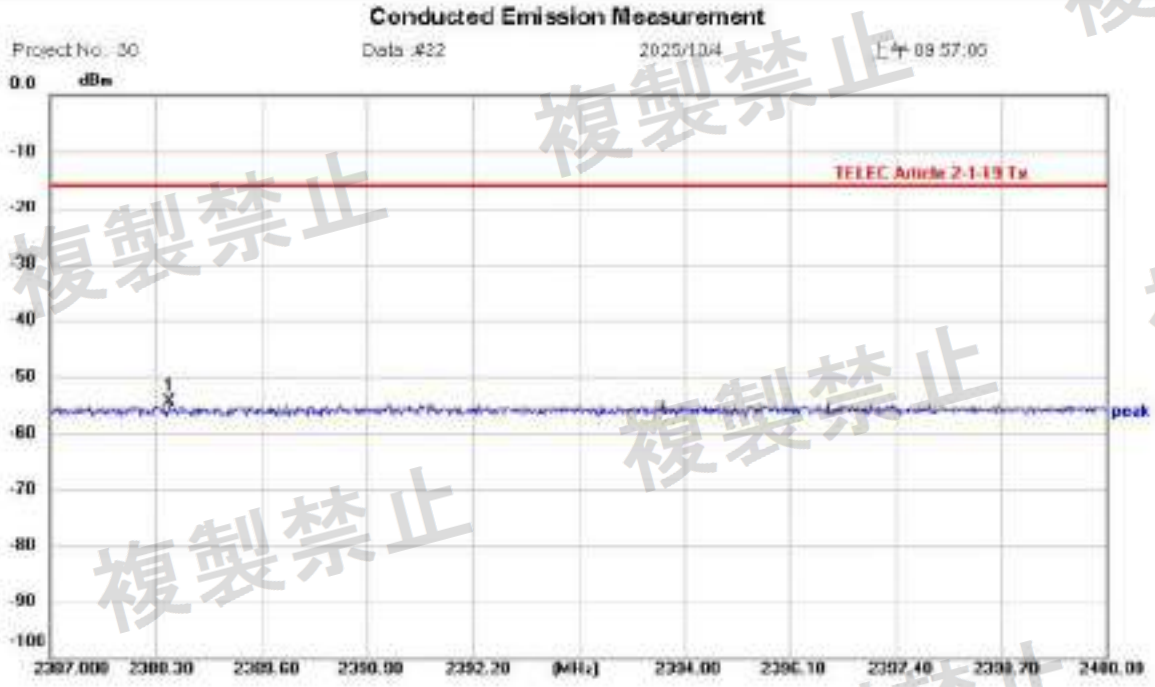


Site: Chamber 04
Limit: TELEC Article 2-1-19 Tx
EUT: W6M22508-24659
M/N:
Mode: Tx BLE 2M CH39
Note:

Polarization:
Power: 3 Vd.c.
Distance:

Temperature: 25.8 (°C)
Humidity: 56 %RH

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1 *	2388.469	-64.63	10.36	-54.27	-16.00	-38.27	peak			P	

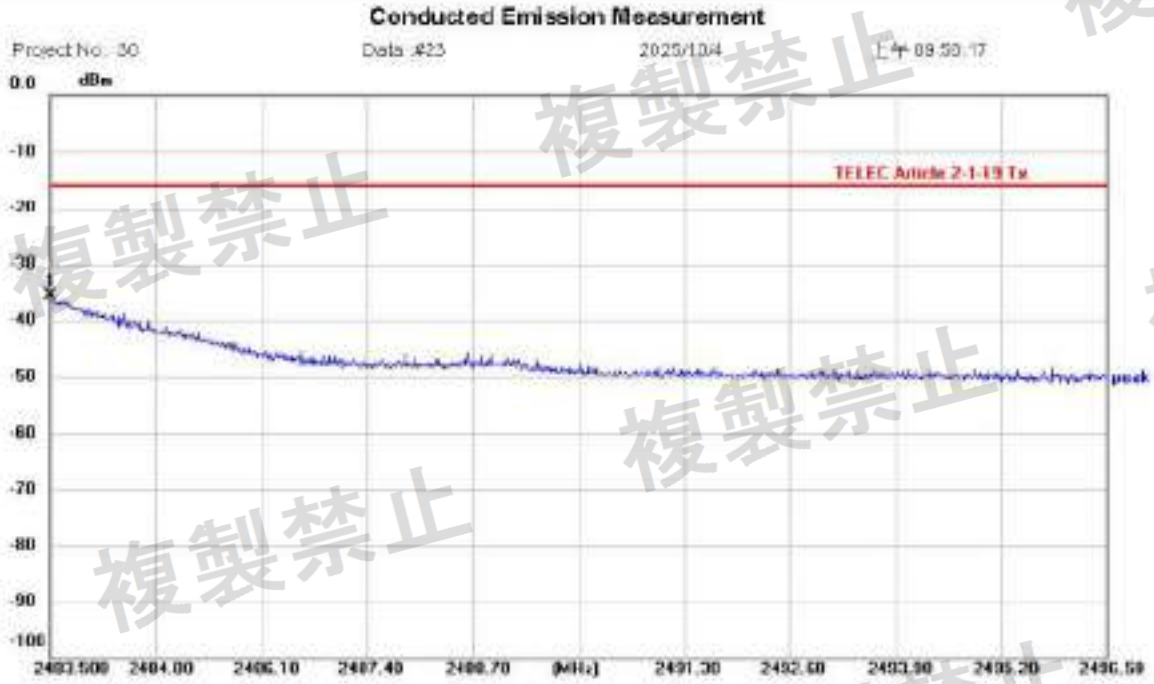


Site: Chamber 04
Limit: TELEC Article 2-1-19 Tx
EUT: W6M22508-24659
M/N:
Mode: Tx BLE 2M CH39
Note:

Polarization:
Power: 3 Vd.c.
Distance:

Temperature: 25.8 (C)
Humidity: 56 %RH

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	2483.500	-46.04	10.36	-35.68	-16.00	-19.68	peak			P	

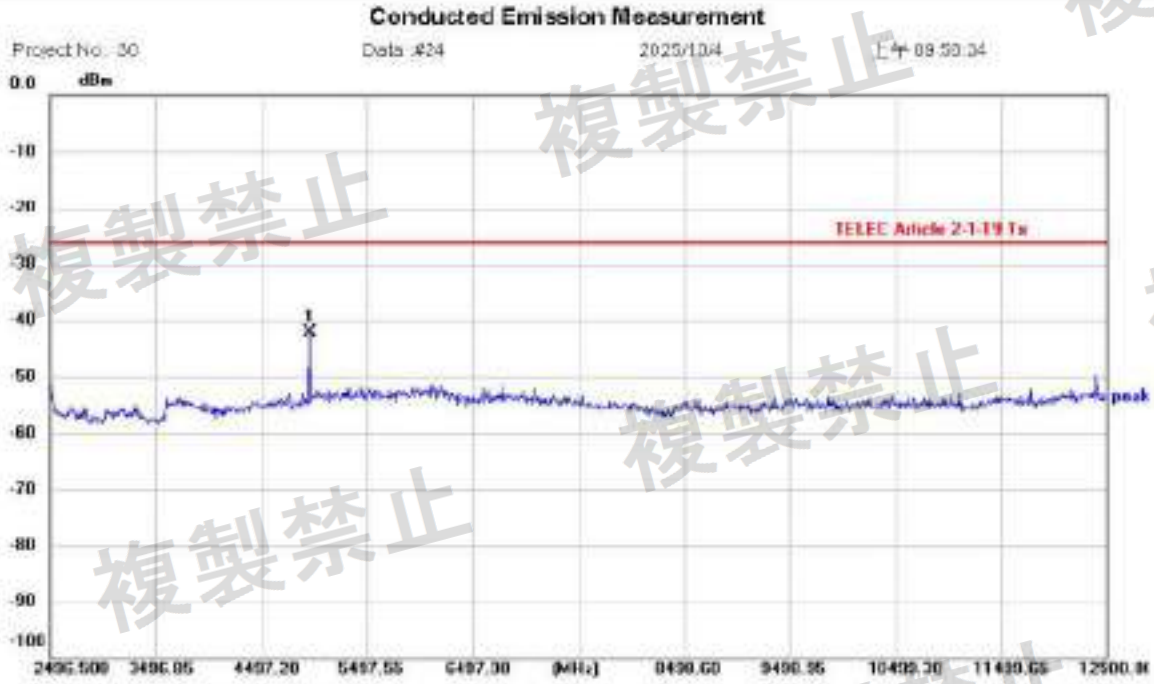


Site: Chamber 04
Limit: TELEC Article 2-1-19 Tx
EUT: W6M22508-24659
M/N:
Mode: Tx BLE 2M CH39
Note:

Polarization:
Power: 3 Vd.c.
Distance:

Temperature: 23.8 (C)
Humidity: 56 %RH

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	4957.361	-52.62	10.61	-42.01	-26.00	-16.01	peak			P	

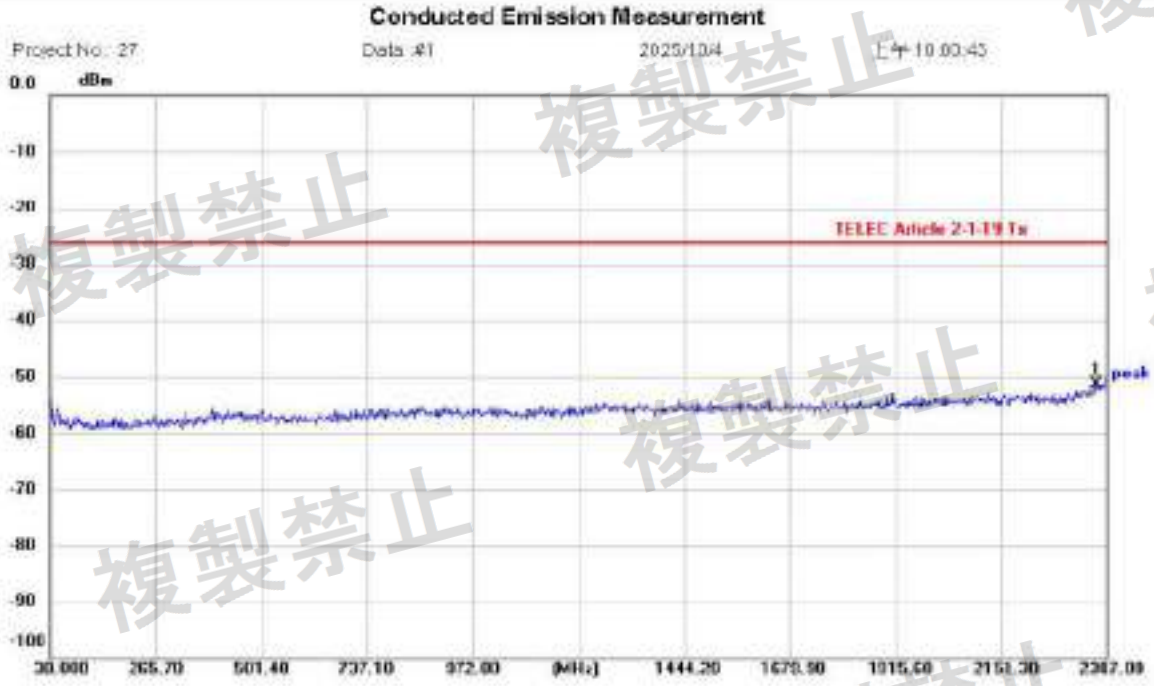


Site: Chamber 04
Limit: TELEC Article 2-1-19 Tx
EUT: W6M22508-24659
M/N:
Mode: Tx BLE 1M CH00
Note:

Polarization:
Power: 2.7 Vdc
Distance:

Temperature: 23.8 (C)
Humidity: 56 %RH

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	2363.430	-61.71	10.35	-51.36	-26.00	-25.36	peak			P	

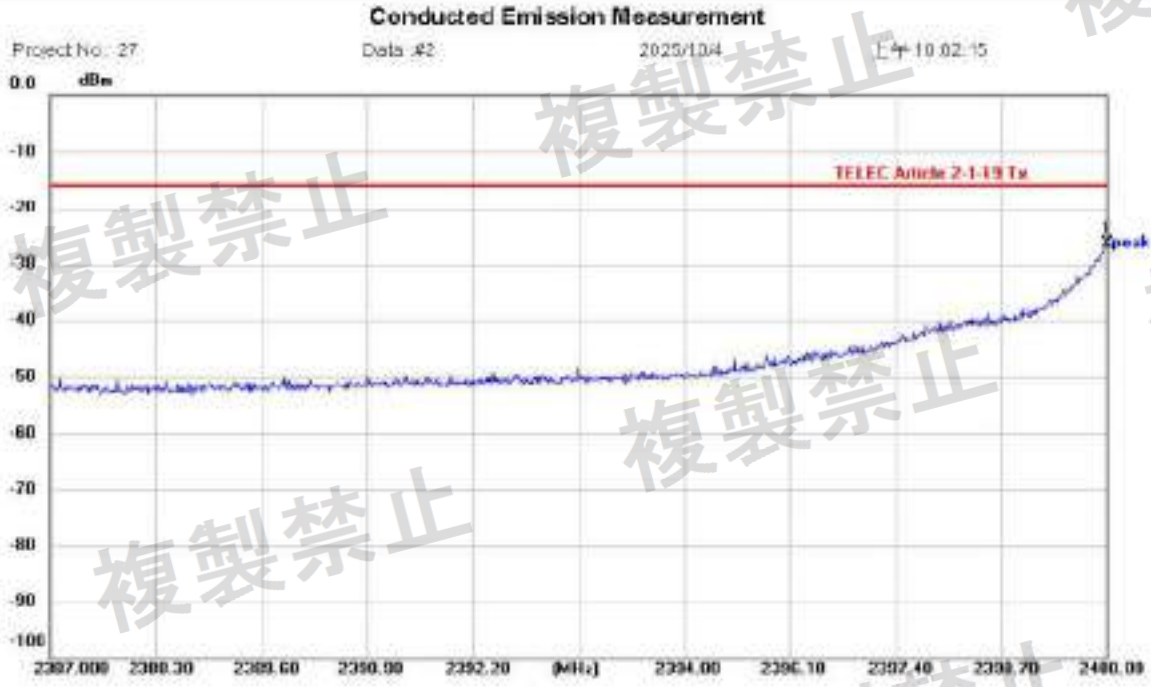


Site: Chamber 04
Limit: TELEC Article 2-1-19 Tx
EUT: W6M22508-24659
M/N:
Mode: Tx BLE 1M CH00
Note:

Polarization:
Power: 2.7 Vdc
Distance:

Temperature: 25.8 (C)
Humidity: 56 %RH

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	2400.000	-36.65	10.36	-26.29	-16.00	-10.29	peak			P	

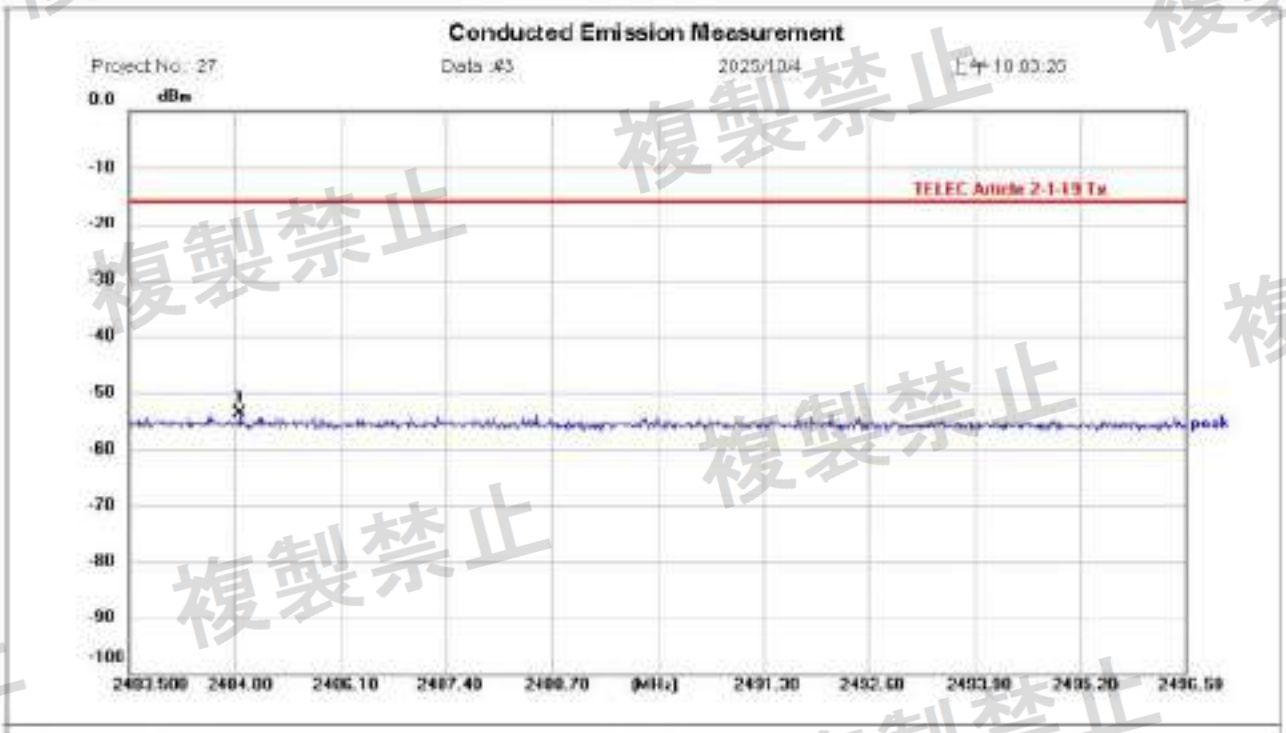


Site: Chamber 04
Limit: TELEC Article 2-1-19 Tx
EUT: W6M22508-24659
M/N:
Mode: Tx BLE 1M CH00
Note:

Polarization:
Power: 2.7 Vdc
Distance:

Temperature: 25.8 (C)
Humidity: 56 %RH

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	2484.852	-64.03	10.36	-53.67	-16.00	-37.67	peak			P	

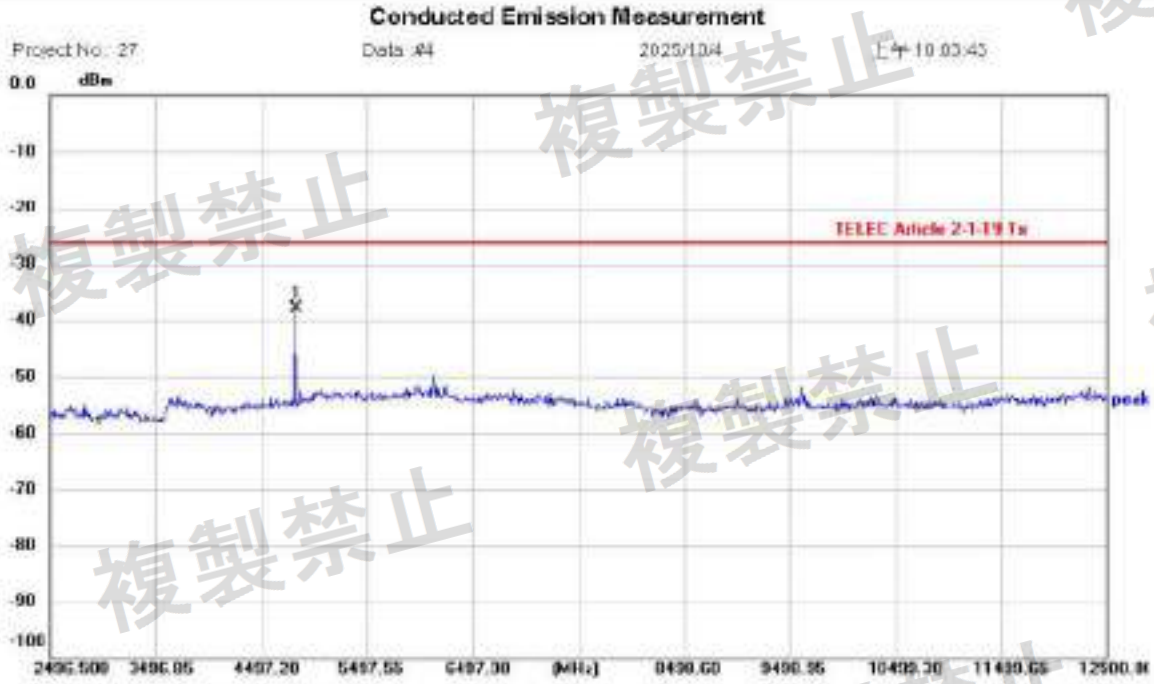


Site: Chamber 04
Limit: TELEC Article 2-1-19 Tx
EUT: W6M22508-24659
M/N:
Mode: Tx BLE 1M CH00
Note:

Polarization:
Power: 2.7 Vdc
Distance:

Temperature: 25.8 (C)
Humidity: 56 %RH

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	4807.309	-48.50	10.60	-37.90	-26.00	-11.90	peak			P	

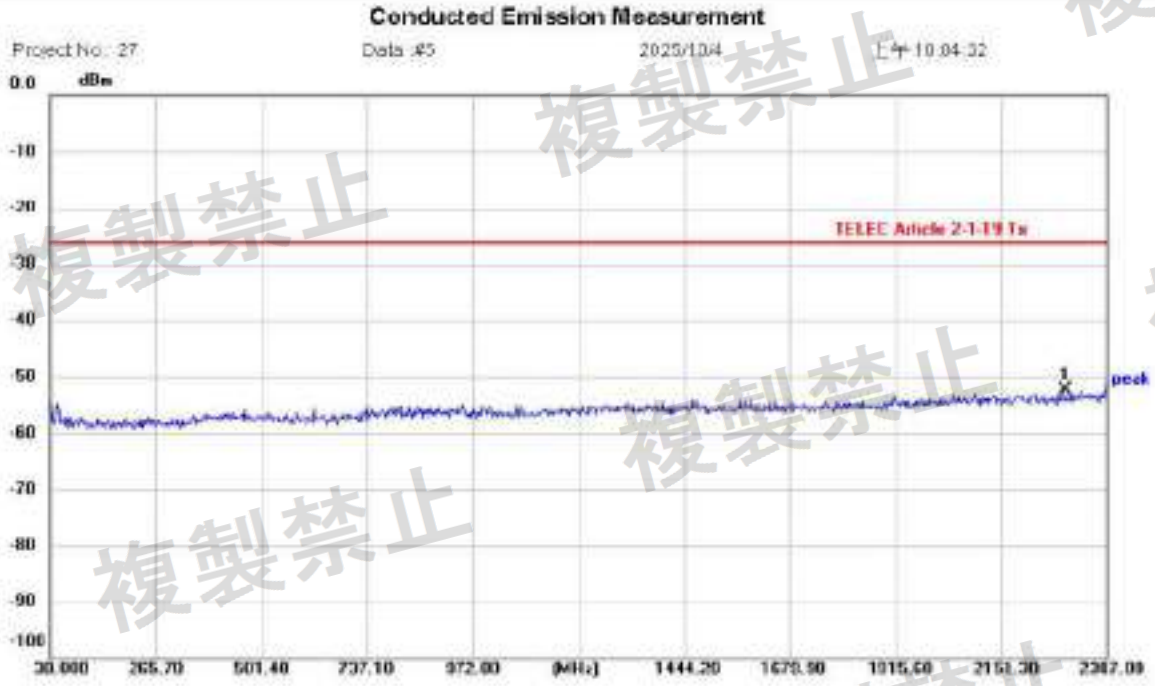


Site: Chamber 04
Limit: TELEC Article 2-1-19 Tx
EUT: W6M22508-24659
M/N:
Mode: Tx BLE 1M CH19
Note:

Polarization:
Power: 2.7 Vdc
Distance:

Temperature: 25.8 (C)
Humidity: 56 %RH

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	2290.363	-62.75	10.34	-52.41	-26.00	-26.41	peak			P	

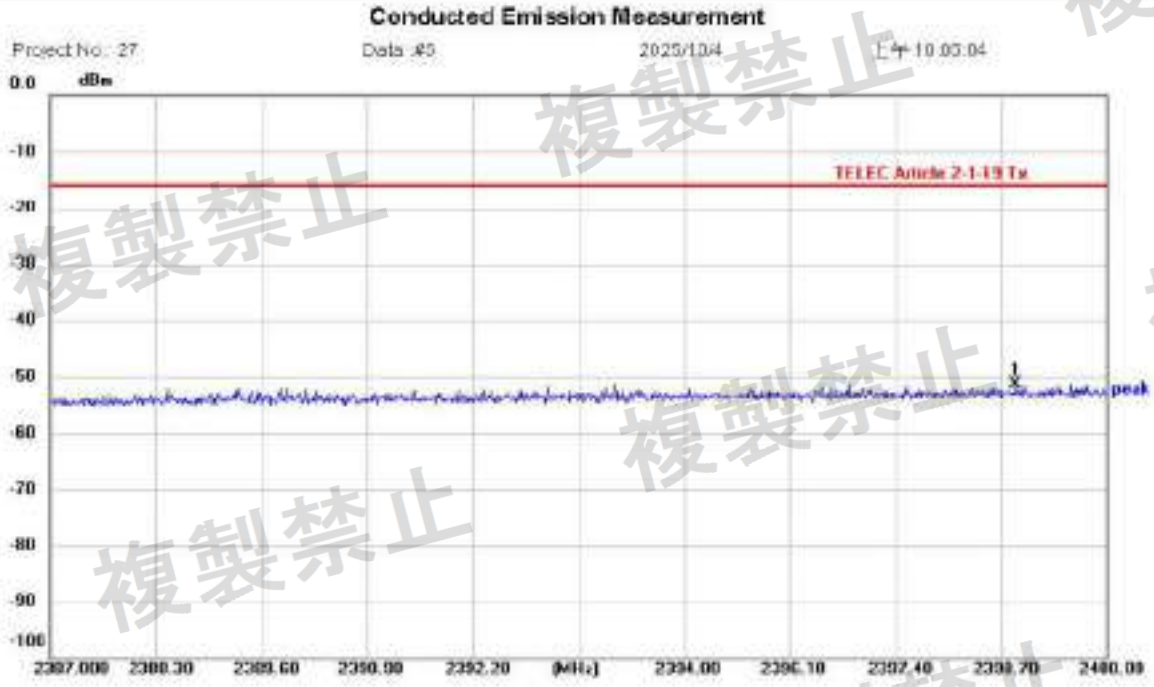


Site: Chamber 04
Limit: TELEC Article 2-1-19 Tx
EUT: W6M22508-24659
M/N:
Mode: Tx BLE 1M CH19
Note:

Polarization:
Power: 2.7 Vdc
Distance:

Temperature: 25.8 (C)
Humidity: 56 %RH

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	2396.882	-61.63	10.36	-51.27	-16.00	-35.27	peak			P	

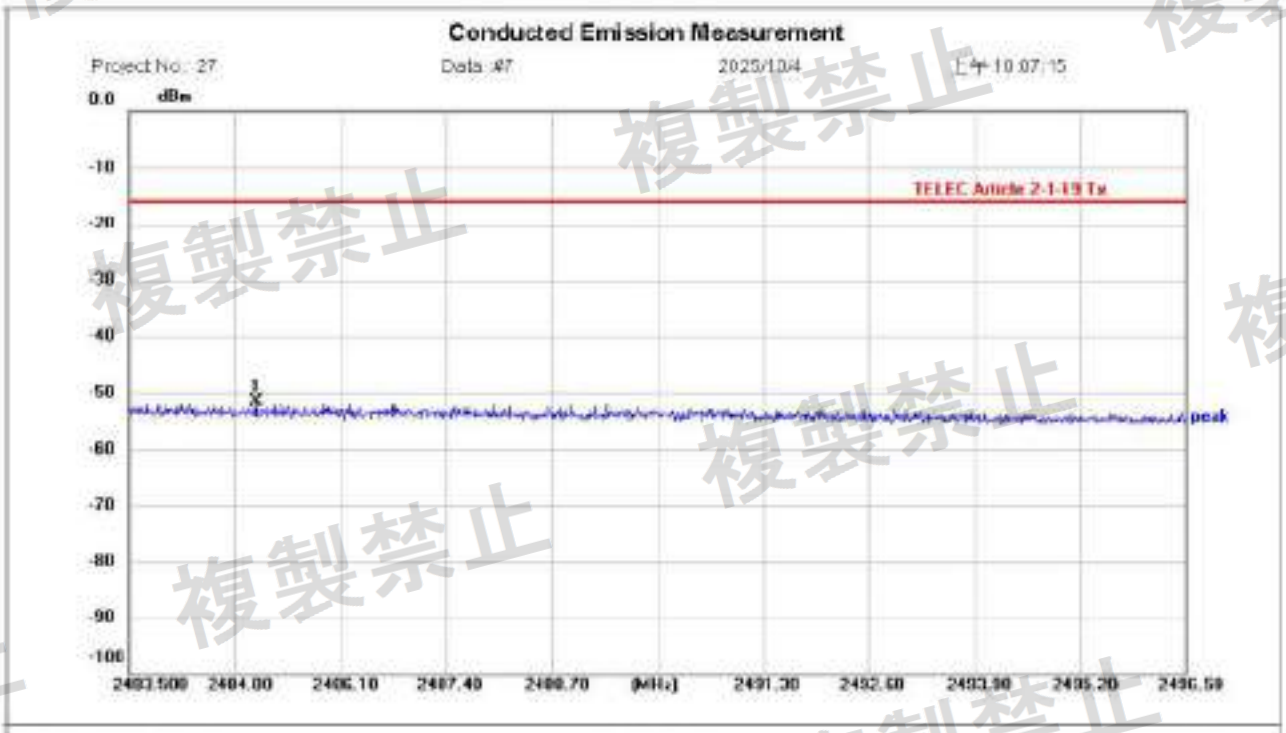


Site: Chamber 04
Limit: TELEC Article 2-1-19 Tx
EUT: W6M22508-24659
M/N:
Mode: Tx BLE 1M CH19
Note:

Polarization:
Power: 2.7 Vdc
Distance:

Temperature: 25.8 (C)
Humidity: 56 %RH

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	2485.073	-61.96	10.36	-51.60	-16.00	-35.60	peak			P	

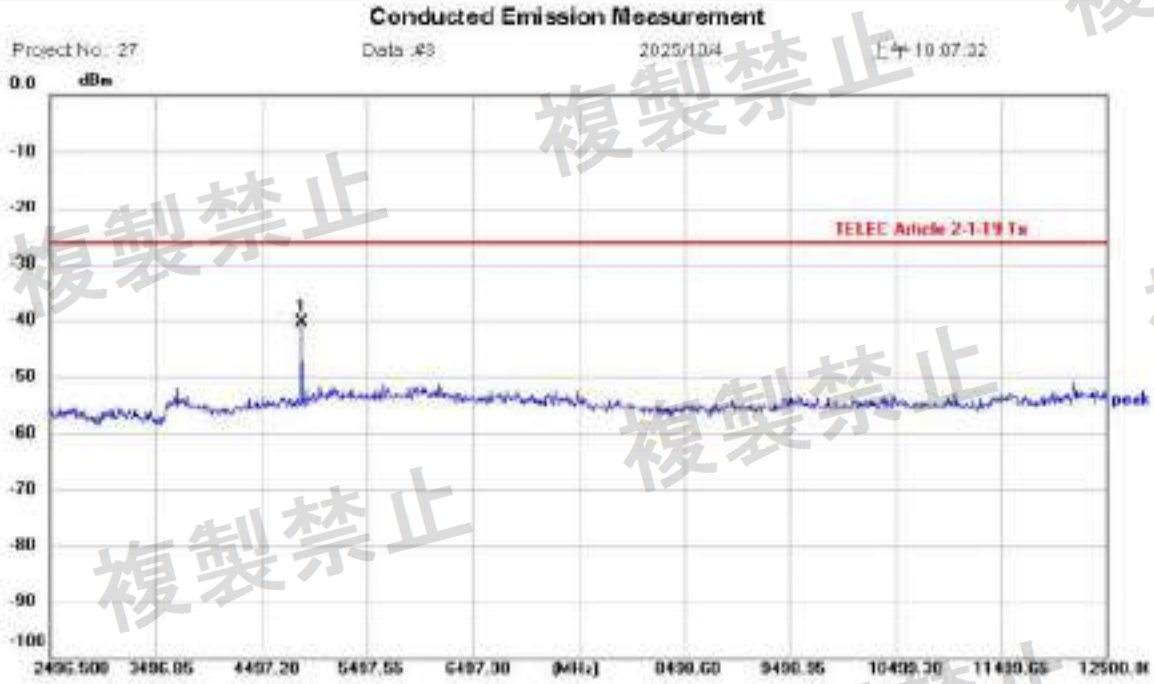


Site: Chamber 04
Limit: TELEC Article 2-1-19 Tx
EUT: W6M22508-24659
M/N:
Mode: Tx BLE 1M CH19
Note:

Polarization:
Power: 2.7 Vdc
Distance:

Temperature: 25.8 (C)
Humidity: 56 %RH

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	4877.333	-51.01	10.57	-40.44	-26.00	-14.44	peak			P	

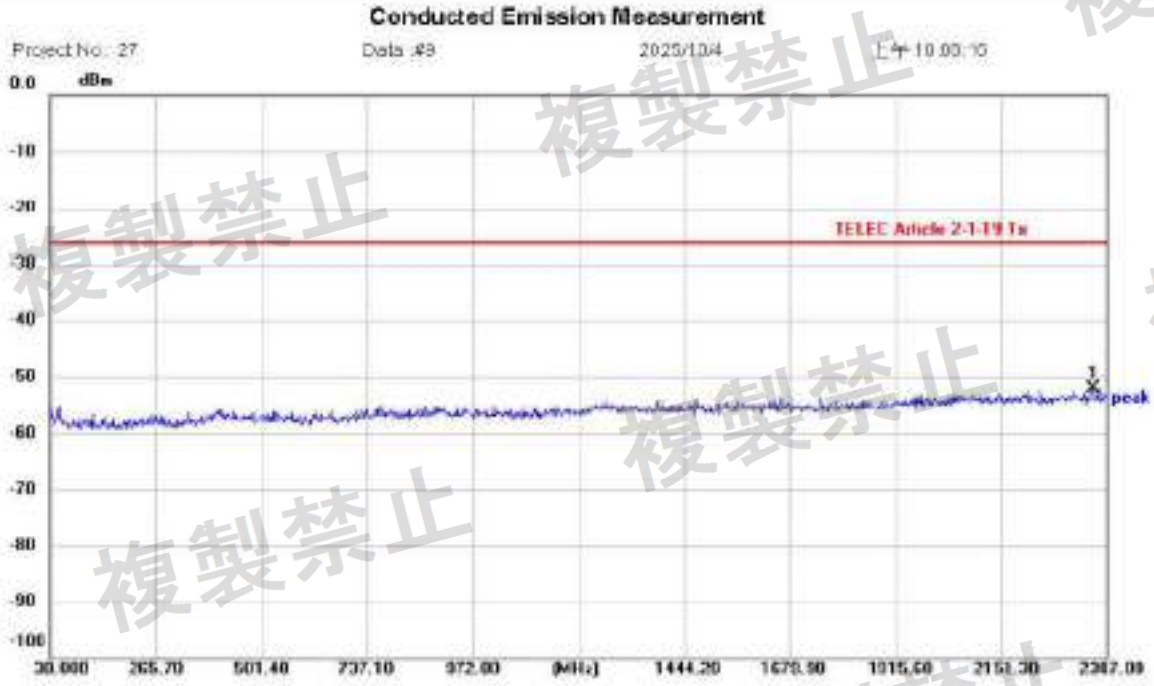


Site: Chamber 04
Limit: TELEC Article 2-1-19 Tx
EUT: W6M22508-24659
M/N:
Mode: Tx BLE 1M CH39
Note:

Polarization:
Power: 2.7 Vdc
Distance:

Temperature: 23.8 (C)
Humidity: 56 %RH

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	2354.002	-62.35	10.35	-52.00	-26.00	-26.00	peak			P	

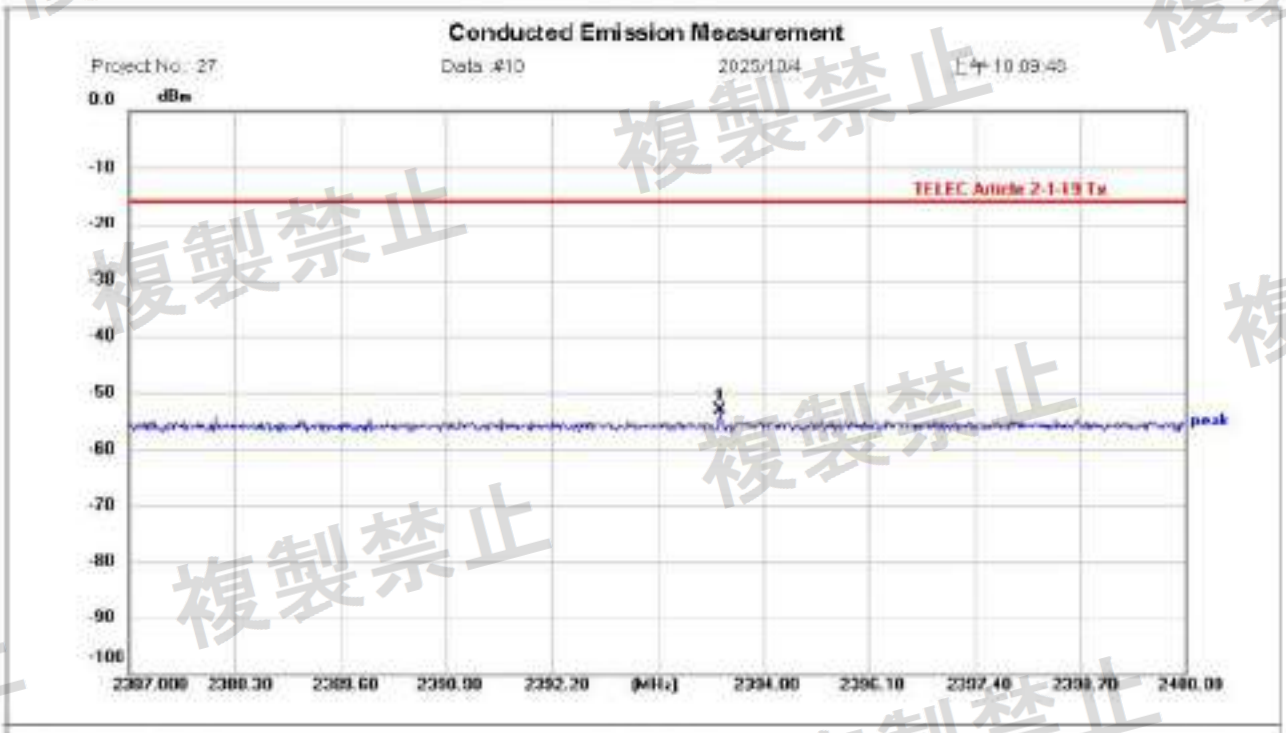


Site: Chamber 04
Limit: TELEC Article 2-1-19 Tx
EUT: W6M22508-24659
M/N:
Mode: Tx BLE 1M CH39
Note:

Polarization:
Power: 2.7 Vdc
Distance:

Temperature: 25.8 (C)
Humidity: 56 %RH

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	2394.267	-63.41	10.36	-53.05	-16.00	-37.05	peak			P	

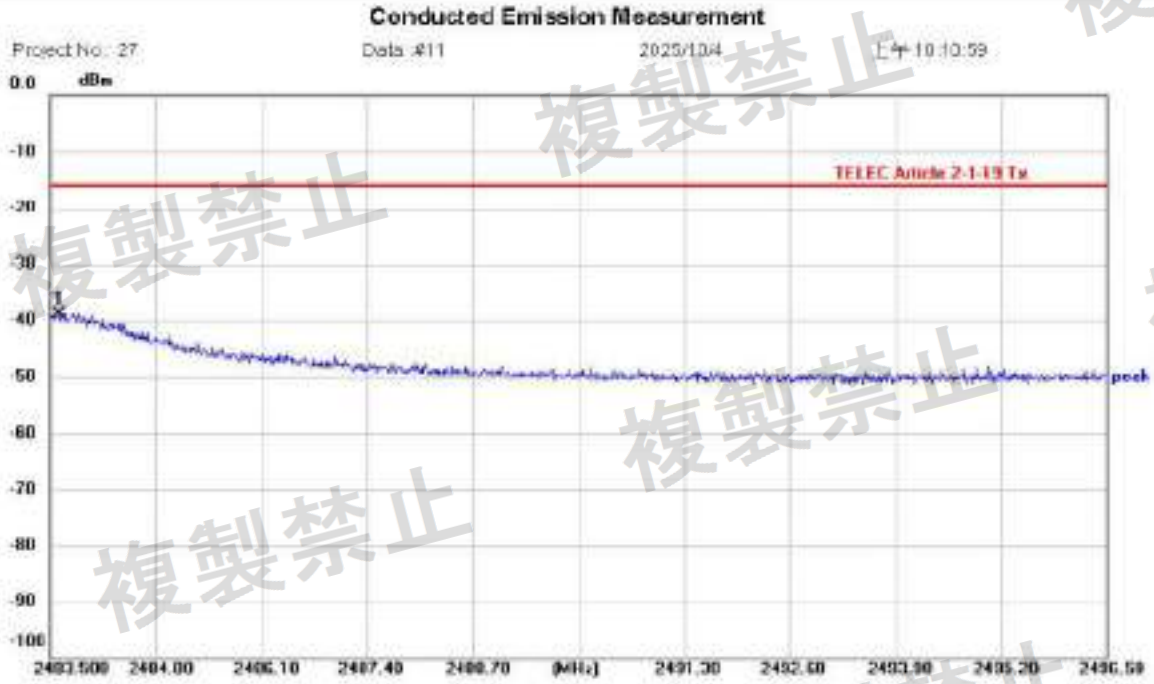


Site: Chamber 04
Limit: TELEC Article 2-1-19 Tx
EUT: W6M22508-24659
M/N:
Mode: Tx BLE 1M CH39
Note:

Polarization:
Power: 2.7 Vdc
Distance:

Temperature: 25.8 (C)
Humidity: 56 %RH

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	2483.617	-49.16	10.36	-38.80	-16.00	-22.80	peak			P	

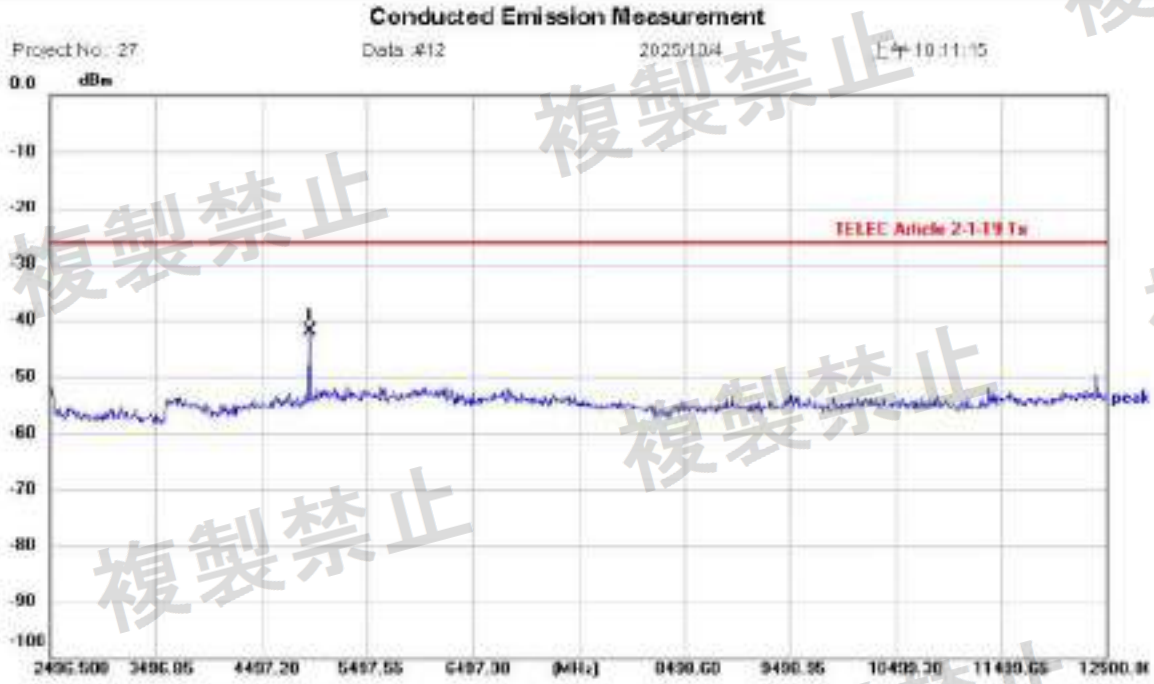


Site: Chamber 04
Limit: TELEC Article 2-1-19 Tx
EUT: W6M22508-24659
M/N:
Mode: Tx BLE 1M CH39
Note:

Polarization:
Power: 2.7 Vdc
Distance:

Temperature: 23.8 (C)
Humidity: 56 %RH

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	4957.361	-52.54	10.61	-41.93	-26.00	-15.93	peak			P	

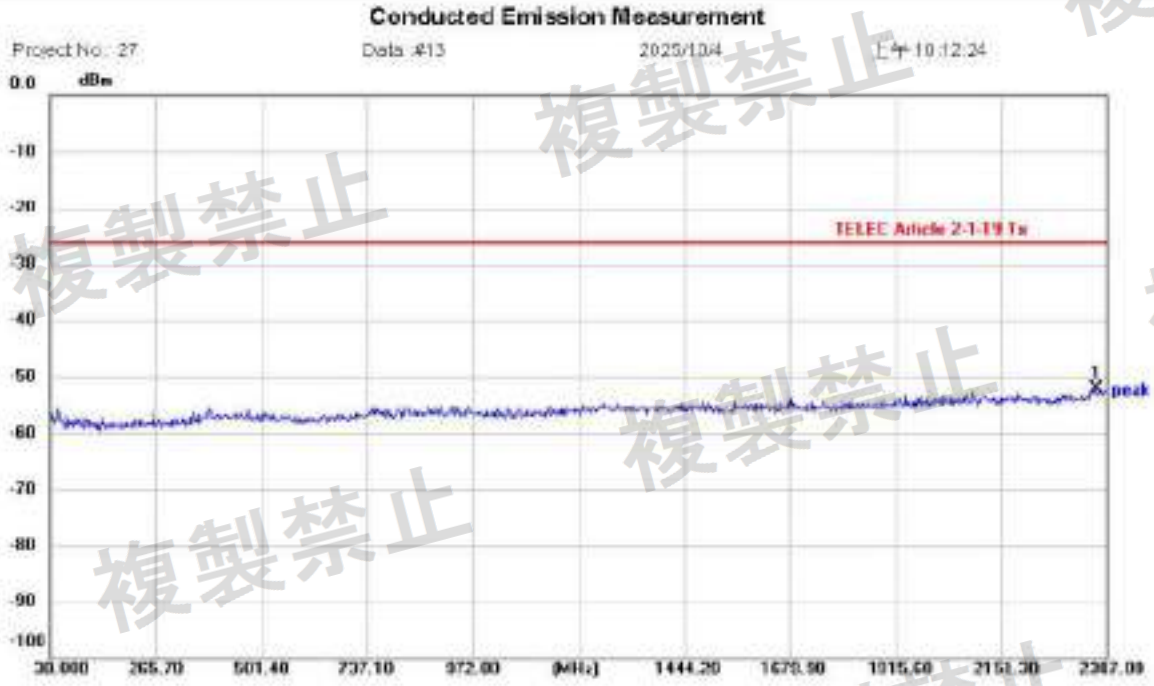


Site: Chamber 04
Limit: TELEC Article 2-1-19 Tx
EUT: W6M22508-24659
M/N:
Mode: Tx BLE 2M CH00
Note:

Polarization:
Power: 2.7 Vdc
Distance:

Temperature: 25.8 (C)
Humidity: 56 %RH

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	2361.073	-62.51	10.35	-52.16	-26.00	-26.16	peak			P	

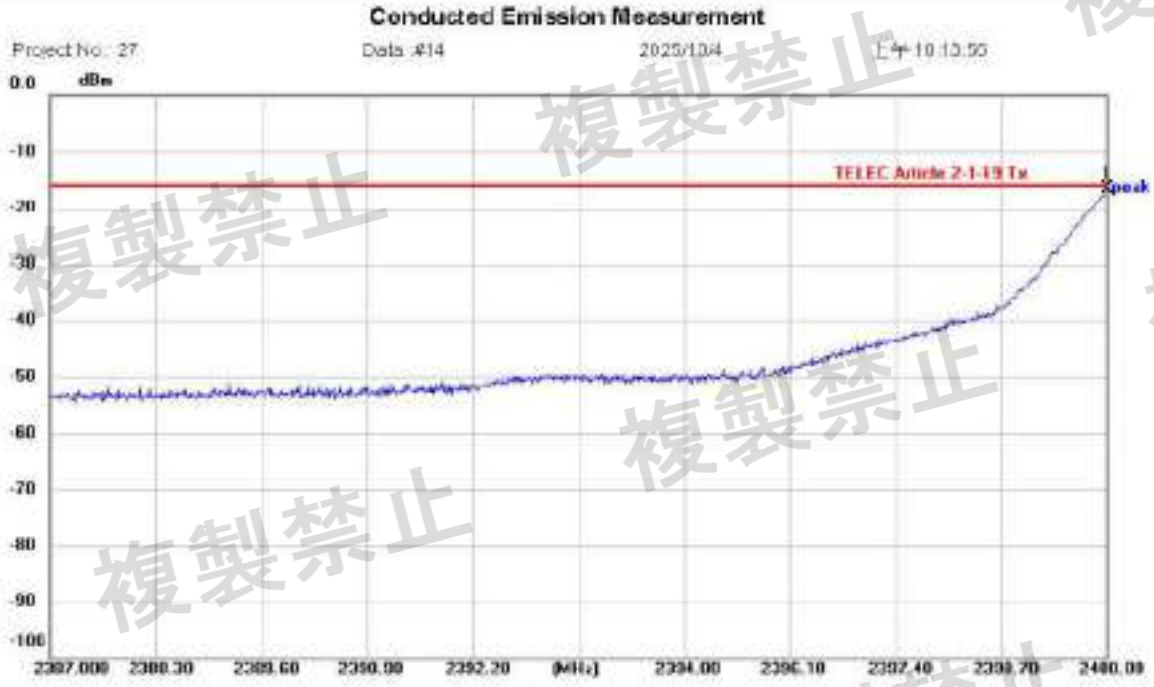


Site: Chamber 04
Limit: TELEC Article 2-1-19 Tx
EUT: W6M22508-24659
M/N:
Mode: Tx BLE 2M CH00
Note:

Polarization:
Power: 2.7 Vdc
Distance:

Temperature: 25.8 (C)
Humidity: 56 %RH

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	2400.000	-27.03	10.36	-16.67	-16.00	-0.67	peak			P	

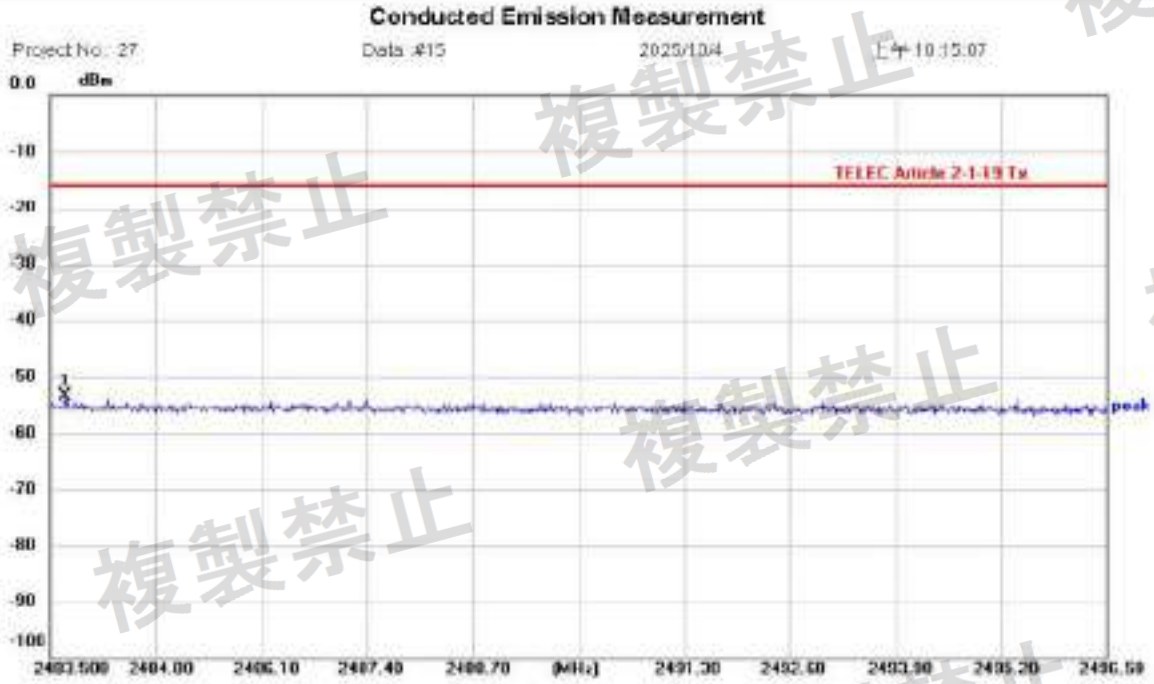


Site: Chamber 04
Limit: TELEC Article 2-1-19 Tx
EUT: W6M22508-24659
M/N:
Mode: Tx BLE 2M CH00
Note:

Polarization:
Power: 2.7 Vdc
Distance:

Temperature: 25.8 (C)
Humidity: 56 %RH

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	2483.682	-63.85	10.36	-53.49	-16.00	-37.49	peak			P	

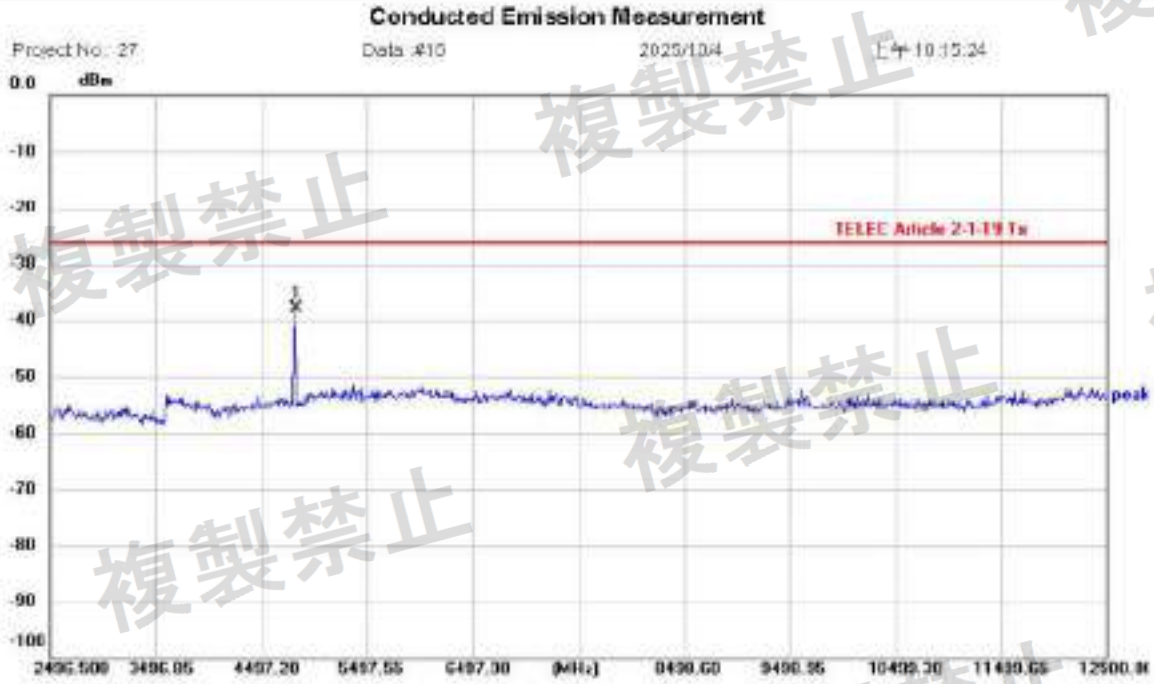


Site: Chamber 04
Limit: TELEC Article 2-1-19 Tx
EUT: W6M22508-24659
M/N:
Mode: Tx BLE 2M CH00
Note:

Polarization:
Power: 2.7 Vdc
Distance:

Temperature: 25.8 (C)
Humidity: 56 %RH

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	4807.309	-48.44	10.60	-37.84	-26.00	-11.84	peak			P	

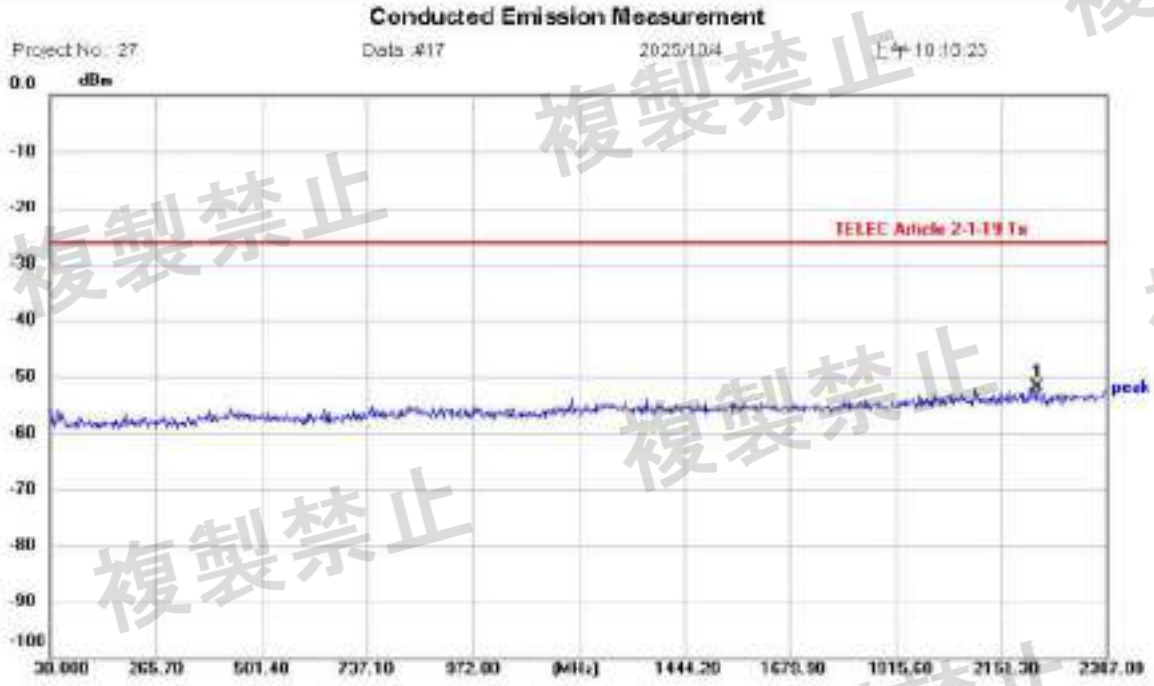


Site: Chamber 04
Limit: TELEC Article 2-1-19 Tx
EUT: W6M22508-24659
M/N:
Mode: Tx BLE 2M CH19
Note:

Polarization:
Power: 2.7 Vdc
Distance:

Temperature: 25.8 (C)
Humidity: 56 %RH

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	2231.436	-62.31	10.34	-51.97	-26.00	-25.97	peak			P	

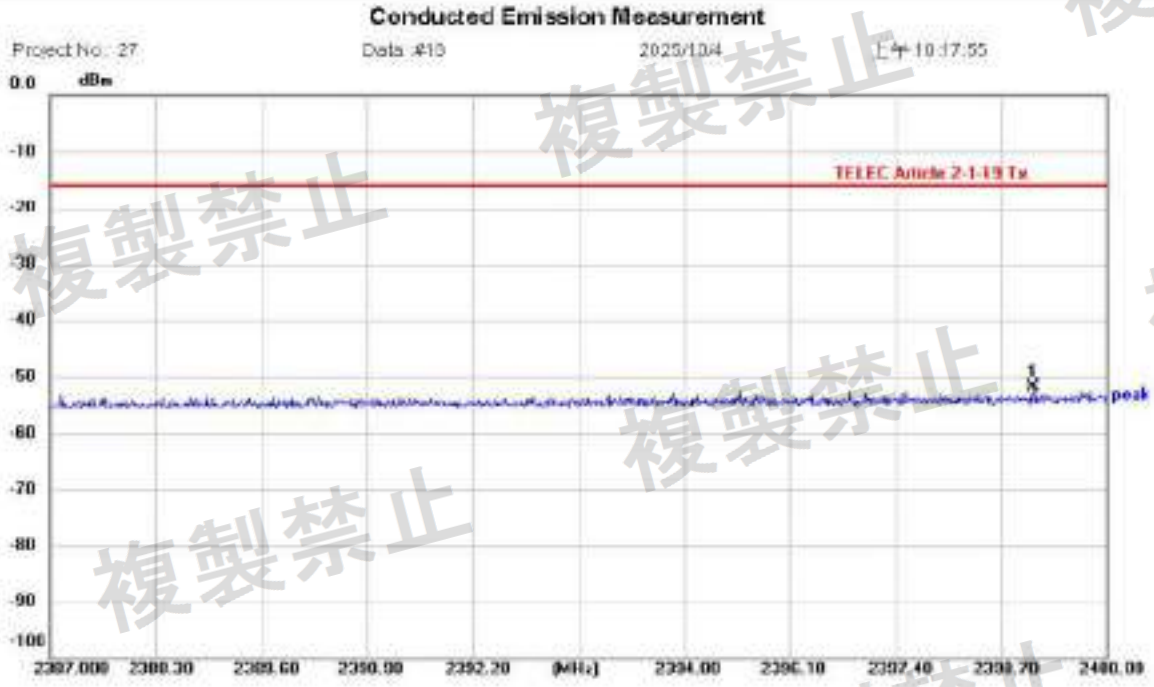


Site: Chamber 04
Limit: TELEC Article 2-1-19 Tx
EUT: W6M22508-24659
M/N:
Mode: Tx BLE 2M CH19
Note:

Polarization:
Power: 2.7 Vdc
Distance:

Temperature: 25.8 (C)
Humidity: 56 %RH

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	2399.090	-62.23	10.36	-51.87	-16.00	-35.87	peak			P	

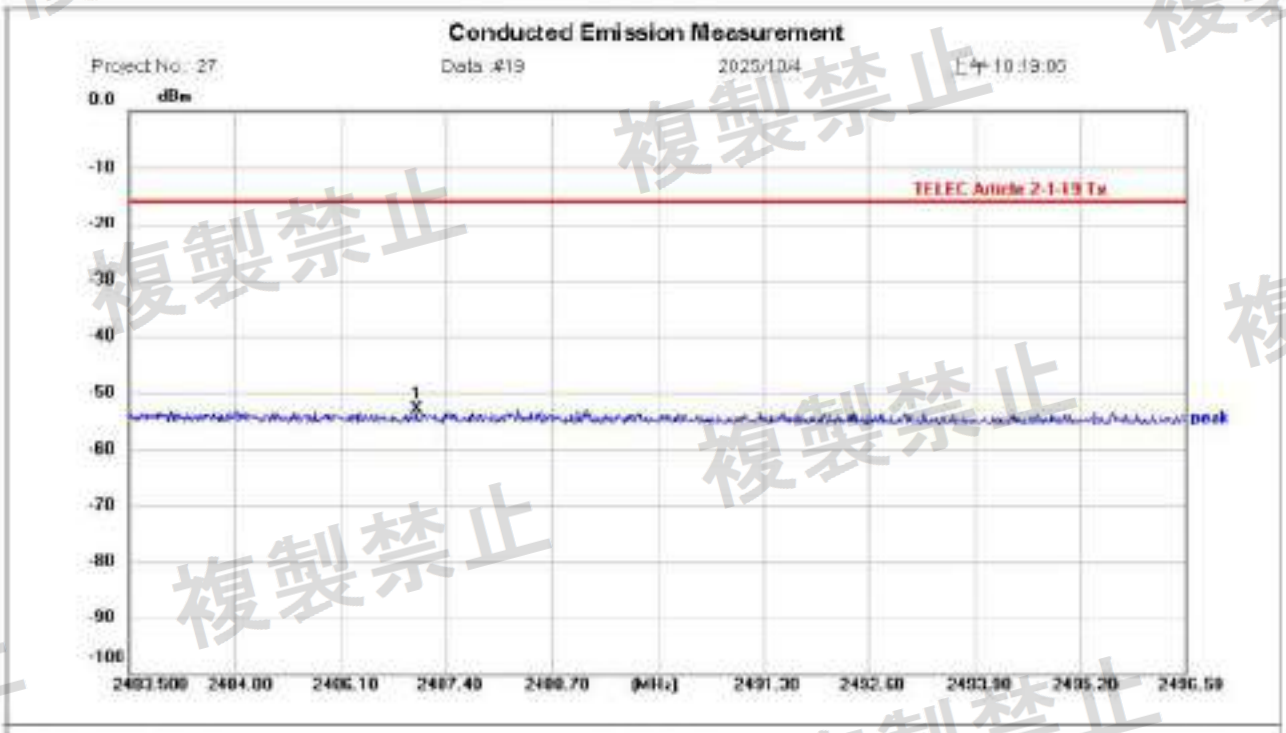


Site: Chamber 04
Limit: TELEC Article 2-1-19 Tx
EUT: W6M22508-24659
M/N:
Mode: Tx BLE 2M CH19
Note:

Polarization:
Power: 2.7 Vdc
Distance:

Temperature: 25.8 (C)
Humidity: 56 %RH

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	2487.036	-63.15	10.36	-52.79	-16.00	-36.79	peak			P	

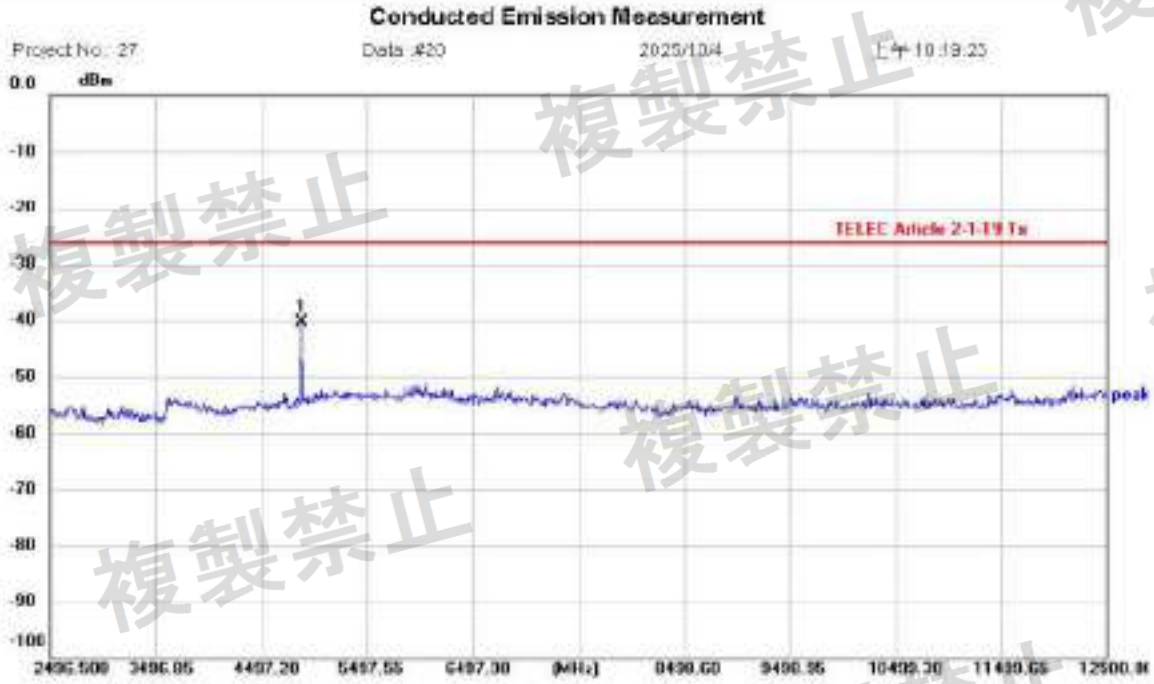


Site: Chamber 04
Limit: TELEC Article 2-1-19 Tx
EUT: W6M22508-24659
M/N:
Mode: Tx BLE 2M CH19
Note:

Polarization:
Power: 2.7 Vdc
Distance:

Temperature: 25.8 (C)
Humidity: 56 %RH

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	4877.333	-51.03	10.57	-40.46	-26.00	-14.46	peak			P	

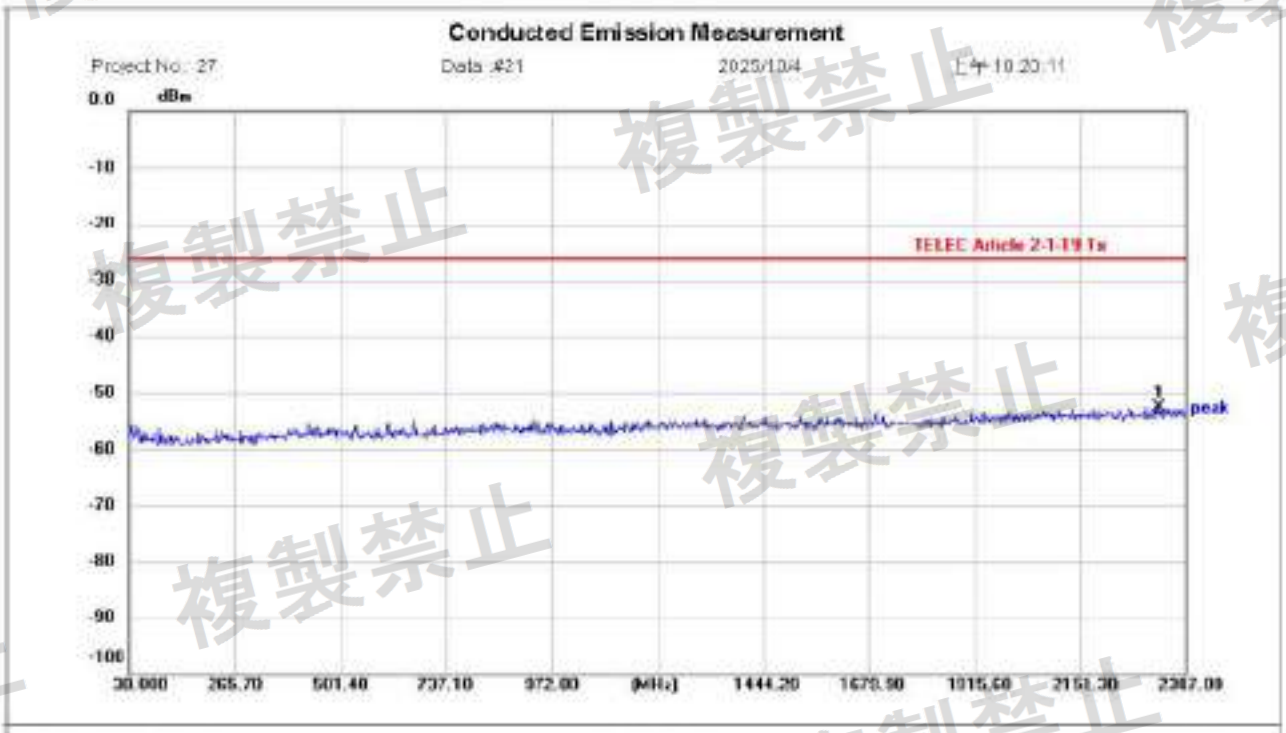


Site: Chamber 04
Limit: TELEC Article 2-1-19 Tx
EUT: W6M22508-24659
M/N:
Mode: Tx BLE 2M CH39
Note:

Polarization:
Power: 2.7 Vdc
Distance:

Temperature: 23.8 (C)
Humidity: 56 %RH

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	2325.718	-63.05	10.35	-52.70	-26.00	-26.70	peak			P	

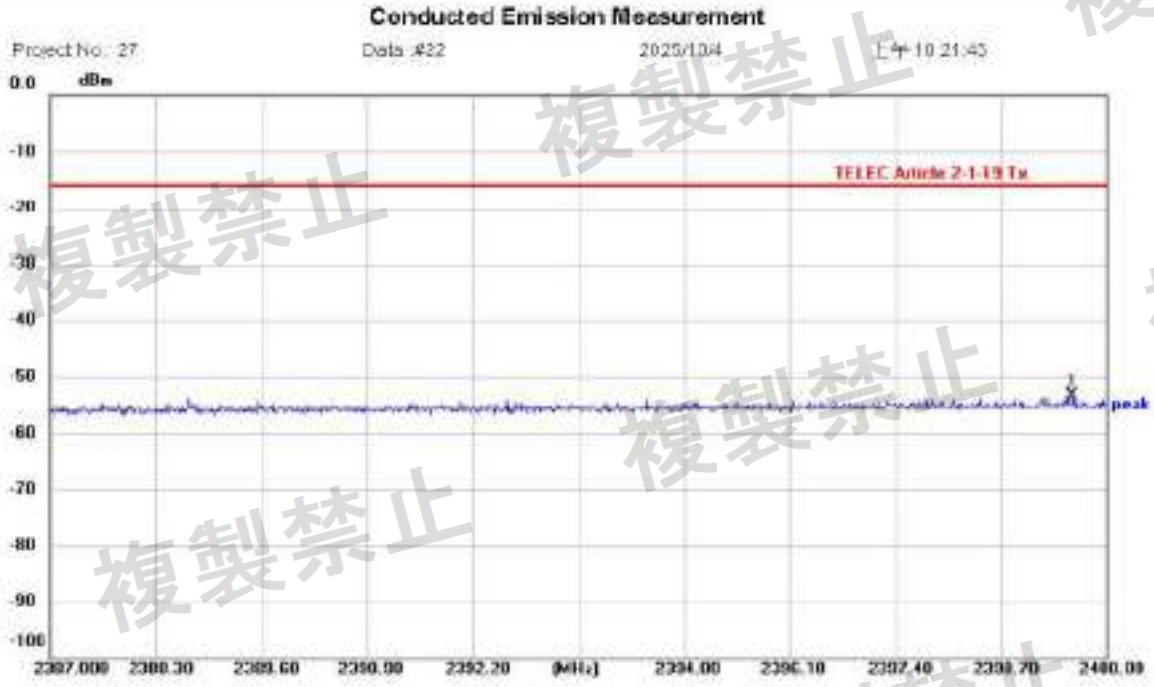


Site: Chamber 04
Limit: TELEC Article 2-1-19 Tx
EUT: W6M22508-24659
M/N:
Mode: Tx BLE 2M CH39
Note:

Polarization:
Power: 2.7 Vdc
Distance:

Temperature: 25.8 (C)
Humidity: 56 %RH

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	2399.571	-63.69	10.36	-53.33	-16.00	-37.33	peak			P	

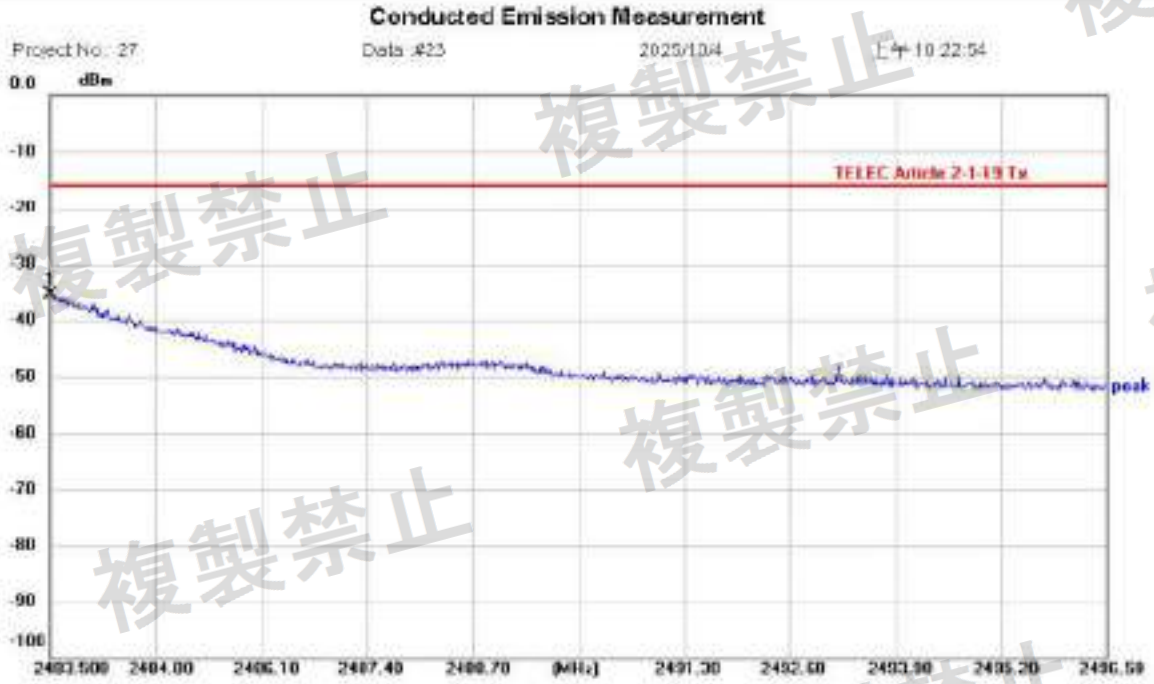


Site: Chamber 04
Limit: TELEC Article 2-1-19 Tx
EUT: W6M22508-24659
M/N:
Mode: Tx BLE 2M CH39
Note:

Polarization:
Power: 2.7 Vdc
Distance:

Temperature: 25.8 (C)
Humidity: 56 %RH

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	2483.500	-45.71	10.36	-35.35	-16.00	-19.35	peak			P	

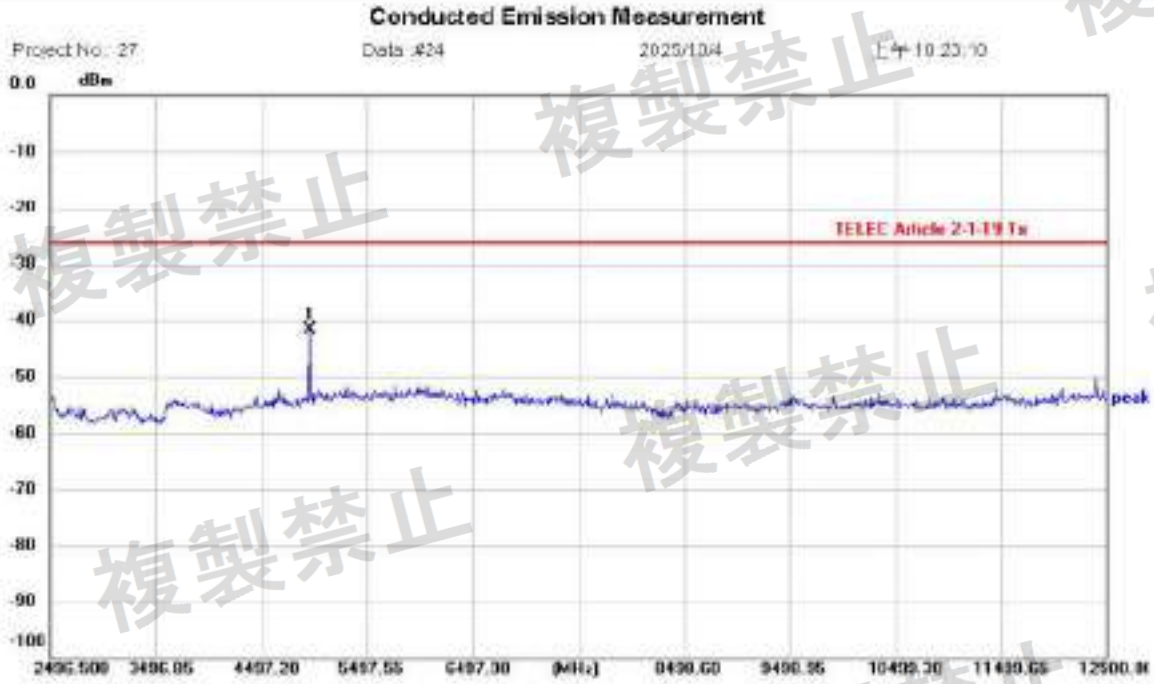


Site: Chamber 04
Limit: TELEC Article 2-1-19 Tx
EUT: W6M22508-24659
M/N:
Mode: Tx BLE 2M CH39
Note:

Polarization:
Power: 2.7 Vdc
Distance:

Temperature: 25.8 (C)
Humidity: 56 %RH

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	4957.361	-52.29	10.61	-41.68	-26.00	-15.68	peak			P	

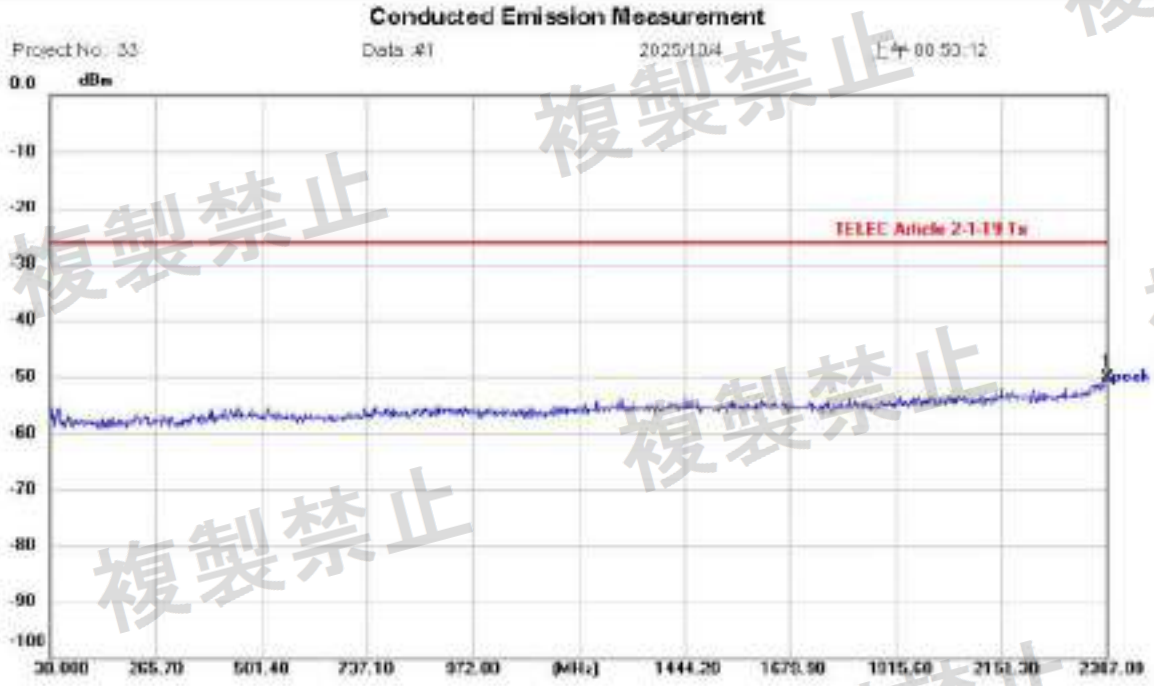


Site: Chamber 04
Limit: TELEC Article 2-1-19 Tx
EUT: W6M22508-24659
M/N:
Mode: Tx BLE 1M CH00
Note:

Polarization:
Power: 3.3 Vdc
Distance:

Temperature: 23.8 (C)
Humidity: 56 %RH

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	2387.000	-60.38	10.36	-50.02	-26.00	-24.02	peak			P	

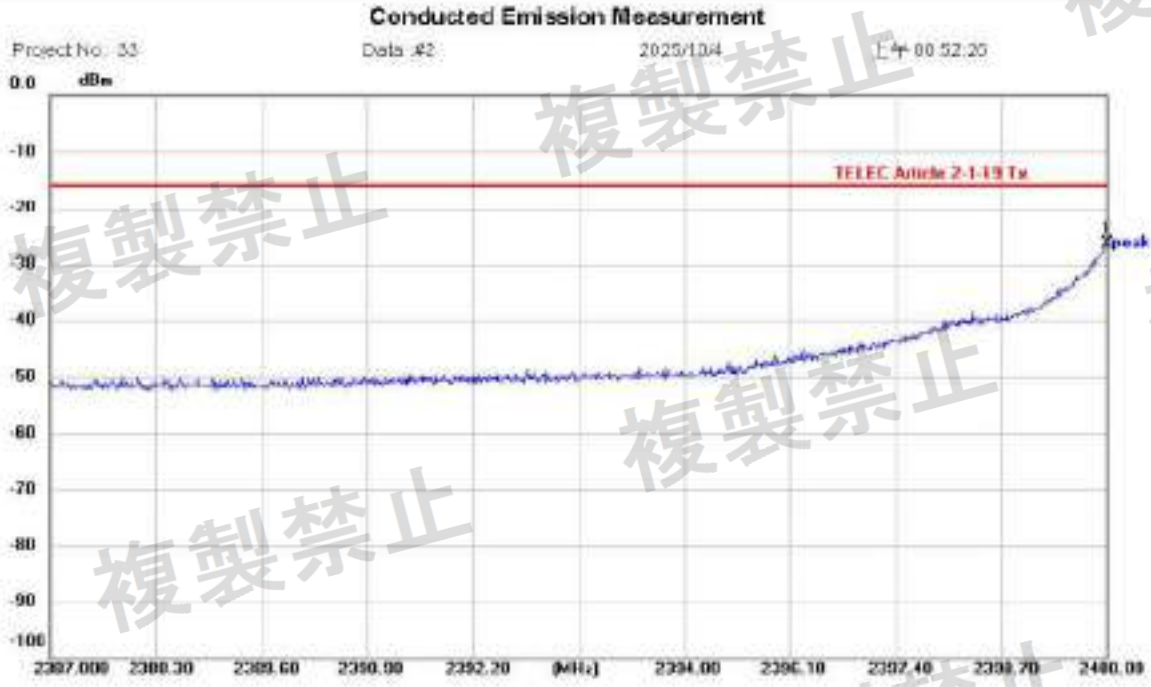


Site: Chamber 04
Limit: TELEC Article 2-1-19 Tx
EUT: W6M22508-24659
M/N:
Mode: Tx BLE 1M CH00
Note:

Polarization:
Power: 3.3 Vdc
Distance:

Temperature: 25.8 (C)
Humidity: 56 %RH

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	2400.000	-36.61	10.36	-26.25	-16.00	-10.25	peak			P	

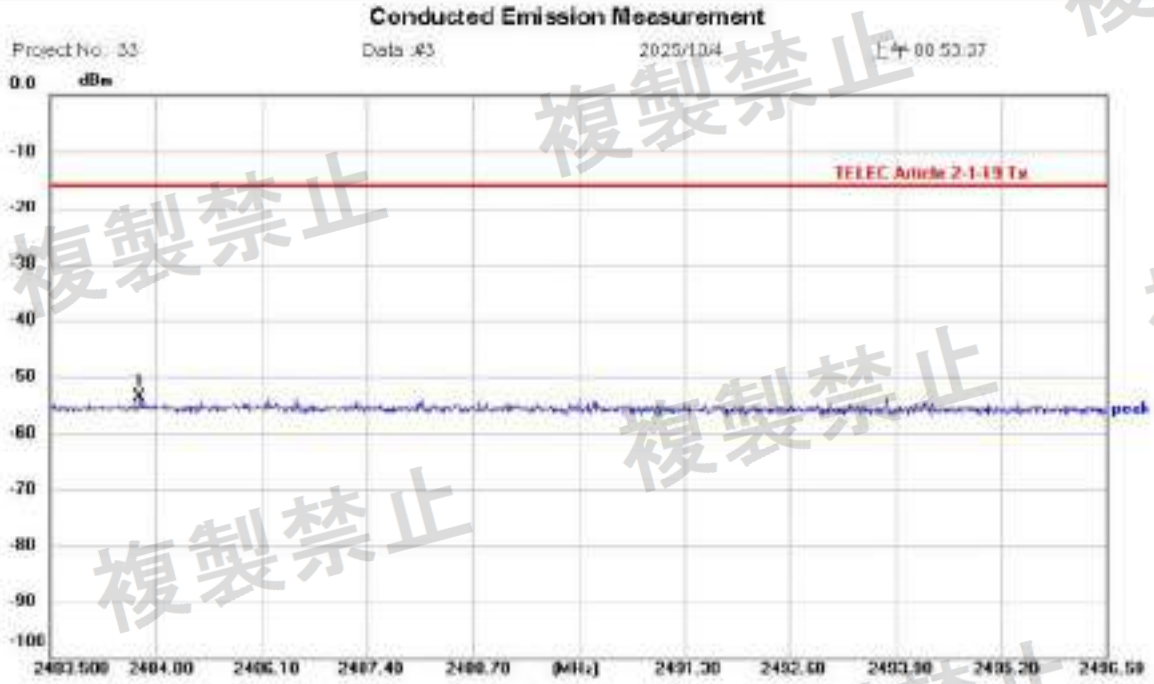


Site: Chamber 04
Limit: TELEC Article 2-1-19 Tx
EUT: W6M22508-24659
M/N:
Mode: Tx BLE 1M CH00
Note:

Polarization:
Power: 3.3 Vdc
Distance:

Temperature: 23.8 (C)
Humidity: 56 %RH

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	2484.592	-63.96	10.36	-53.60	-16.00	-37.60	peak			P	

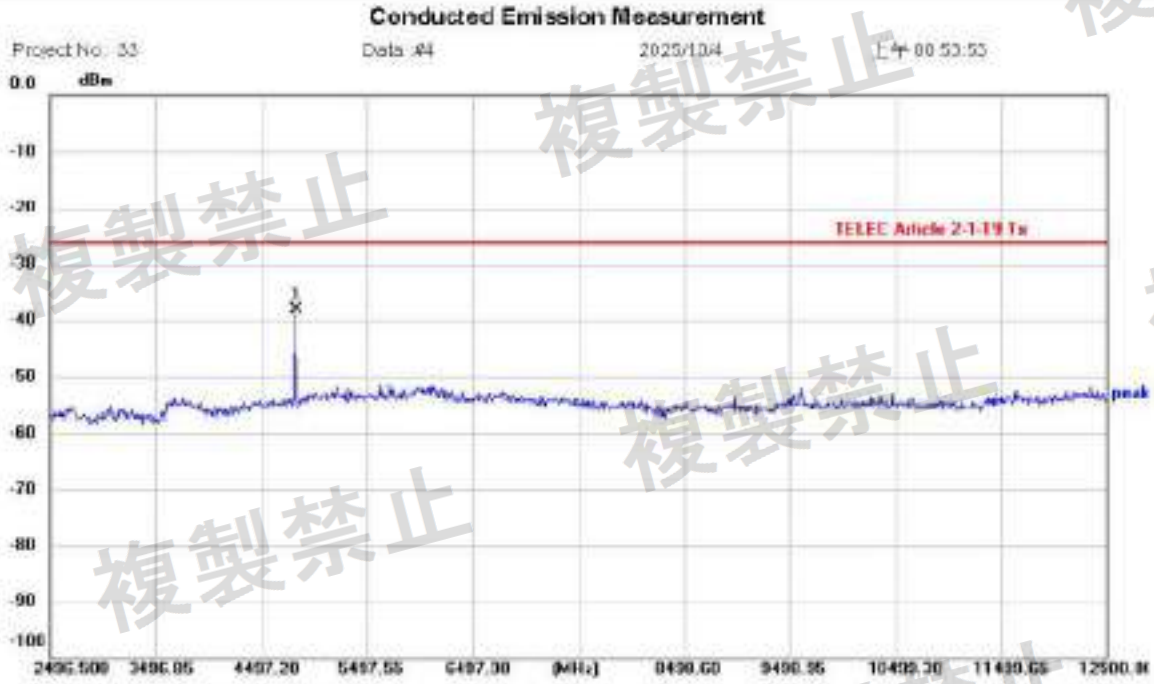


Site: Chamber 04
Limit: TELEC Article 2-1-19 Tx
EUT: W6M22508-24659
M/N:
Mode: Tx BLE 1M CH00
Note:

Polarization:
Power: 3.3 Vdc
Distance:

Temperature: 23.8 (C)
Humidity: 56 %RH

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	4807.309	-48.64	10.60	-38.04	-26.00	-12.04	peak			P	

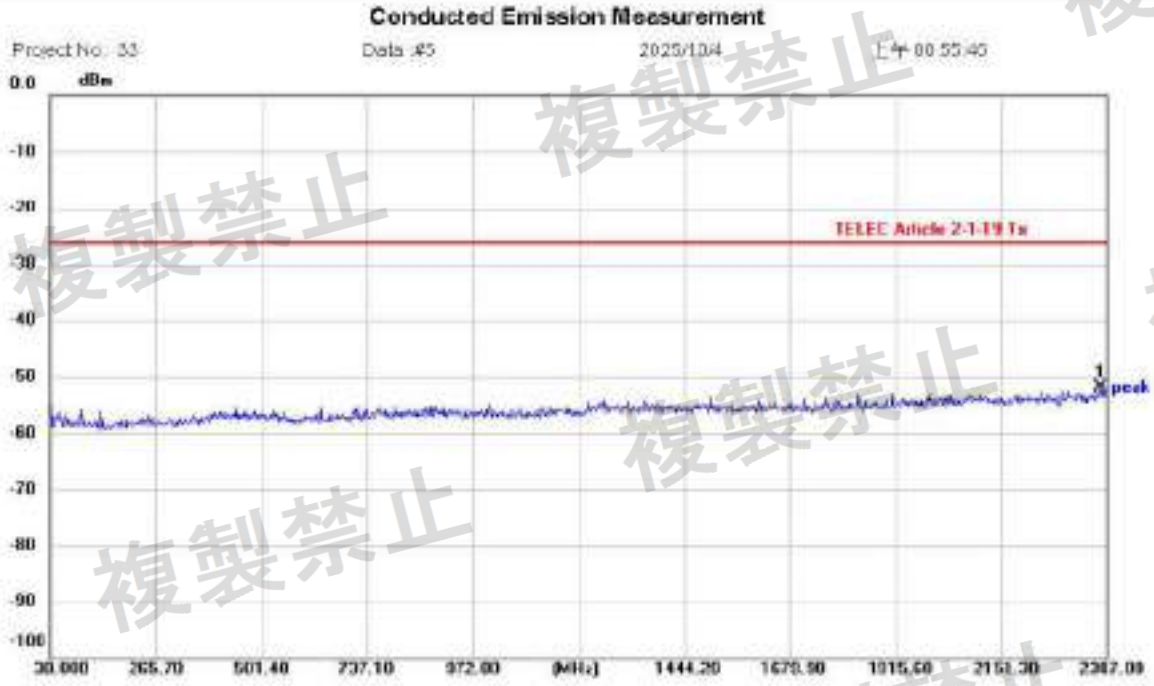


Site: Chamber 04
Limit: TELEC Article 2-1-19 Tx
EUT: W6M22508-24659
M/N:
Mode: Tx BLE 1M CH19
Note:

Polarization:
Power: 3.3 Vdc
Distance:

Temperature: 25.8 (C)
Humidity: 56 %RH

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	2372.856	-62.24	10.35	-51.89	-26.00	-25.89	peak			P	

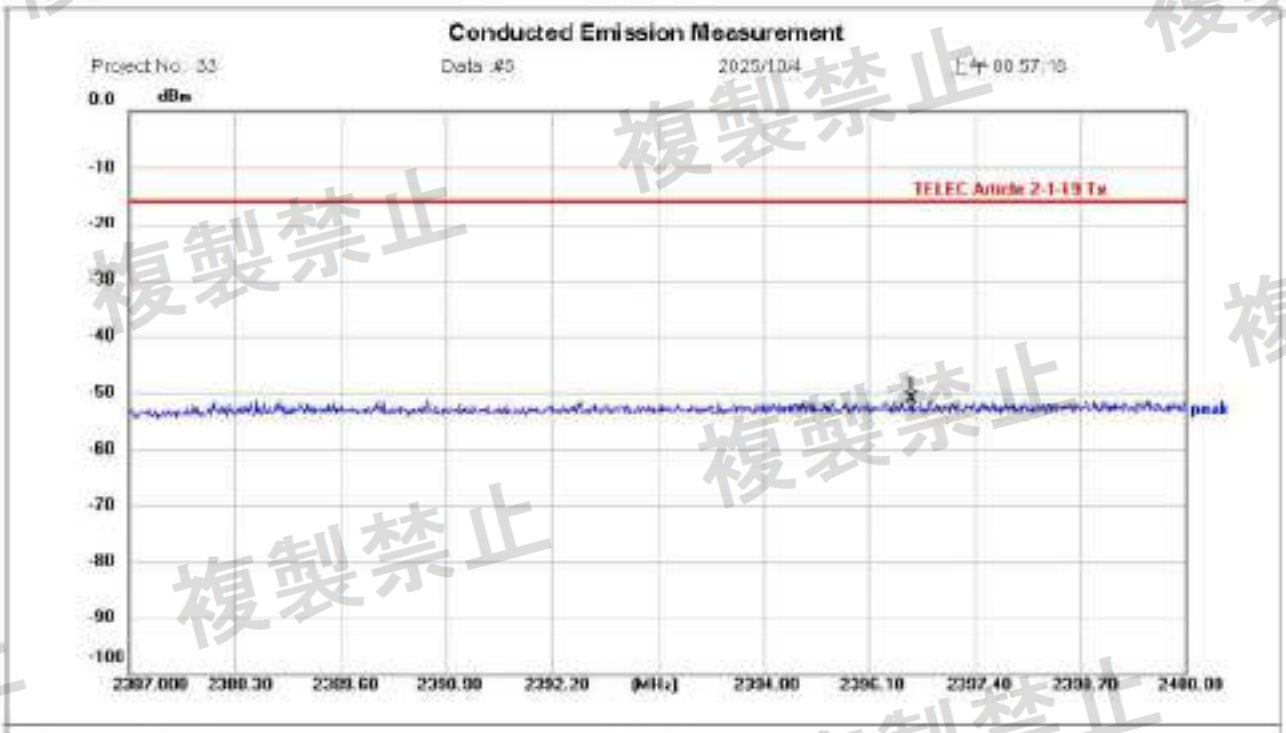


Site: Chamber 04
Limit: TELEC Article 2-1-19 Tx
EUT: W6M22508-24659
M/N:
Mode: Tx BLE 1M CH19
Note:

Polarization:
Power: 3.3 Vdc
Distance:

Temperature: 25.8 (C)
Humidity: 56 %RH

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	2396.633	-61.58	10.36	-51.22	-16.00	-35.22	peak			P	

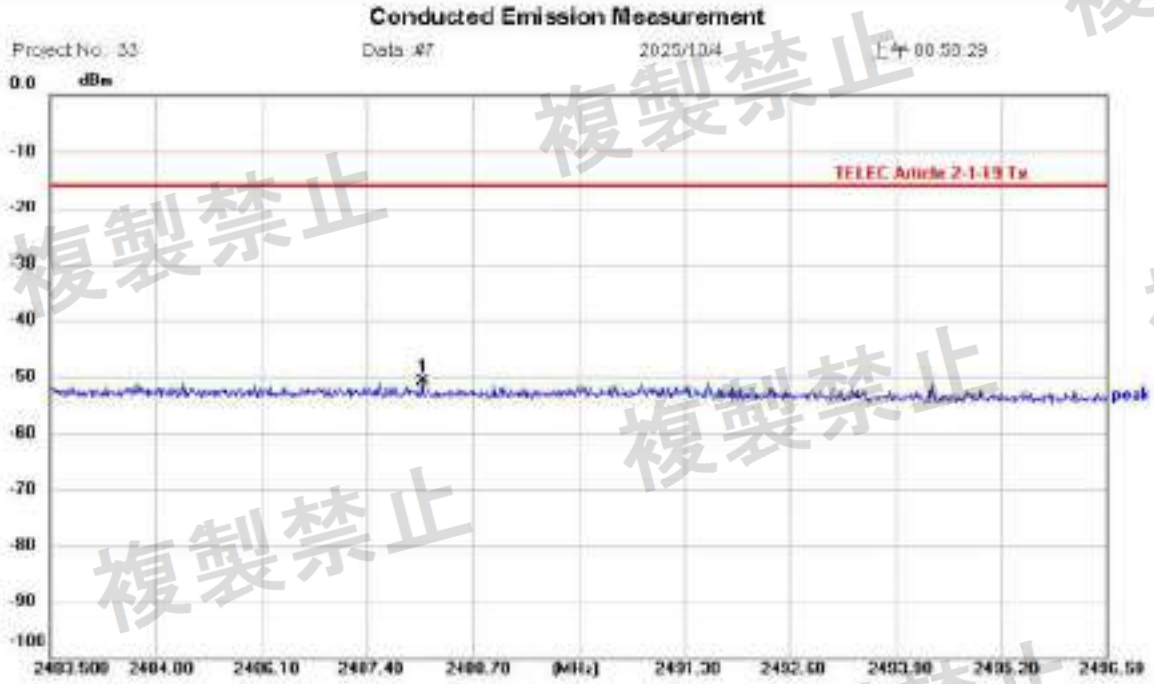


Site: Chamber 04
Limit: TELEC Article 2-1-19 Tx
EUT: W6M22508-24659
M/N:
Mode: Tx BLE 1M CH19
Note:

Polarization:
Power: 3.7 Vdc
Distance:

Temperature: 23.8 (C)
Humidity: 56 %RH

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	2488.076	-61.31	10.36	-50.95	-16.00	-34.95	peak			P	

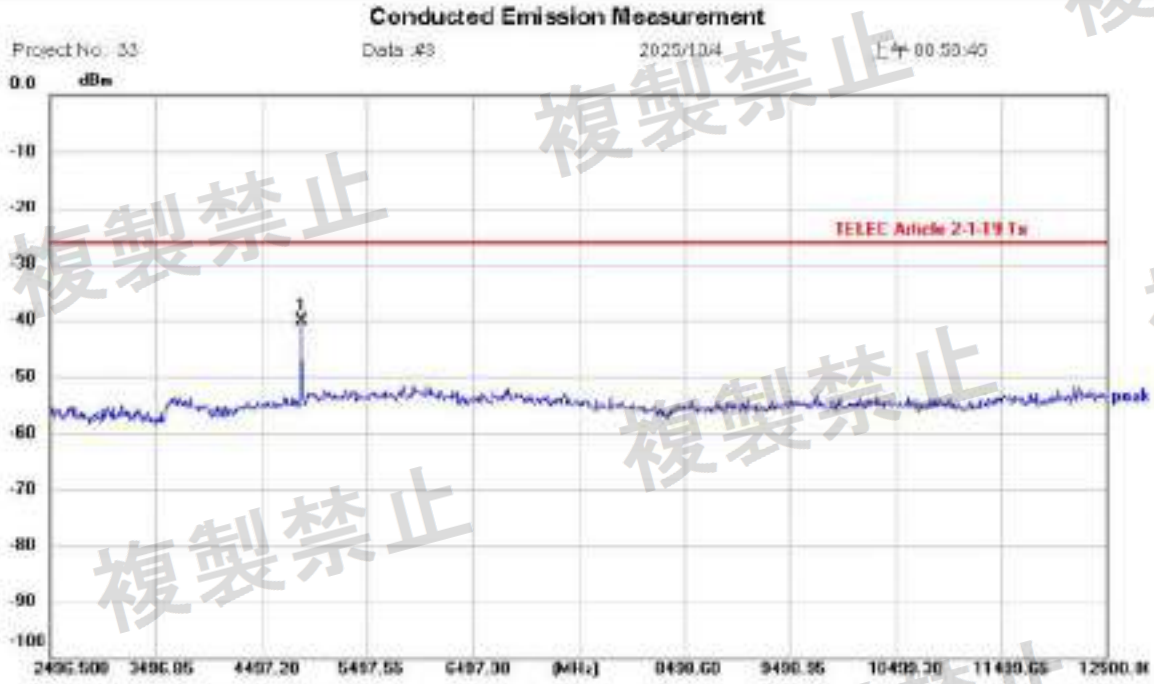


Site: Chamber 04
Limit: TELEC Article 2-1-19 Tx
EUT: W6M22508-24659
M/N:
Mode: Tx BLE 1M CH19
Note:

Polarization:
Power: 3.2 Vdc
Distance:

Temperature: 23.8 (C)
Humidity: 56 %RH

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	4877.333	-50.63	10.57	-40.06	-26.00	-14.06	peak			P	

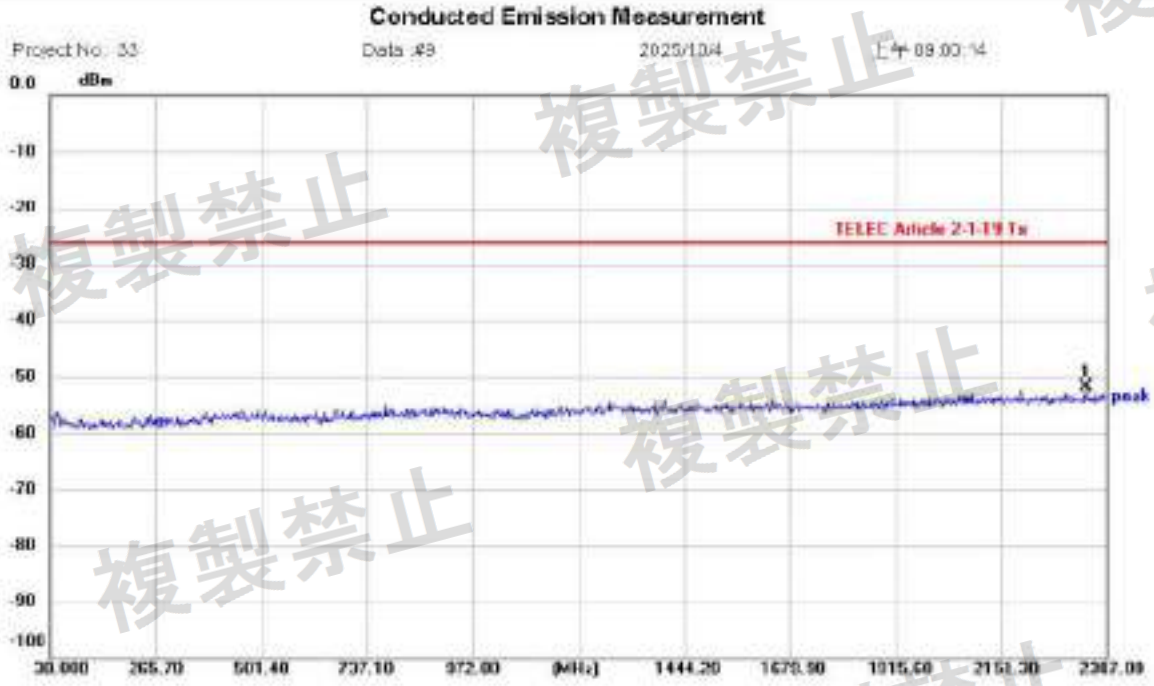


Site: Chamber 04
Limit: TELEC Article 2-1-19 Tx
EUT: W6M22508-24659
M/N:
Mode: Tx BLE 1M CH39
Note:

Polarization:
Power: 3.3 Vdc
Distance:

Temperature: 23.8 (C)
Humidity: 56 %RH

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	2339.860	-62.30	10.35	-51.95	-26.00	-25.95	peak			P	

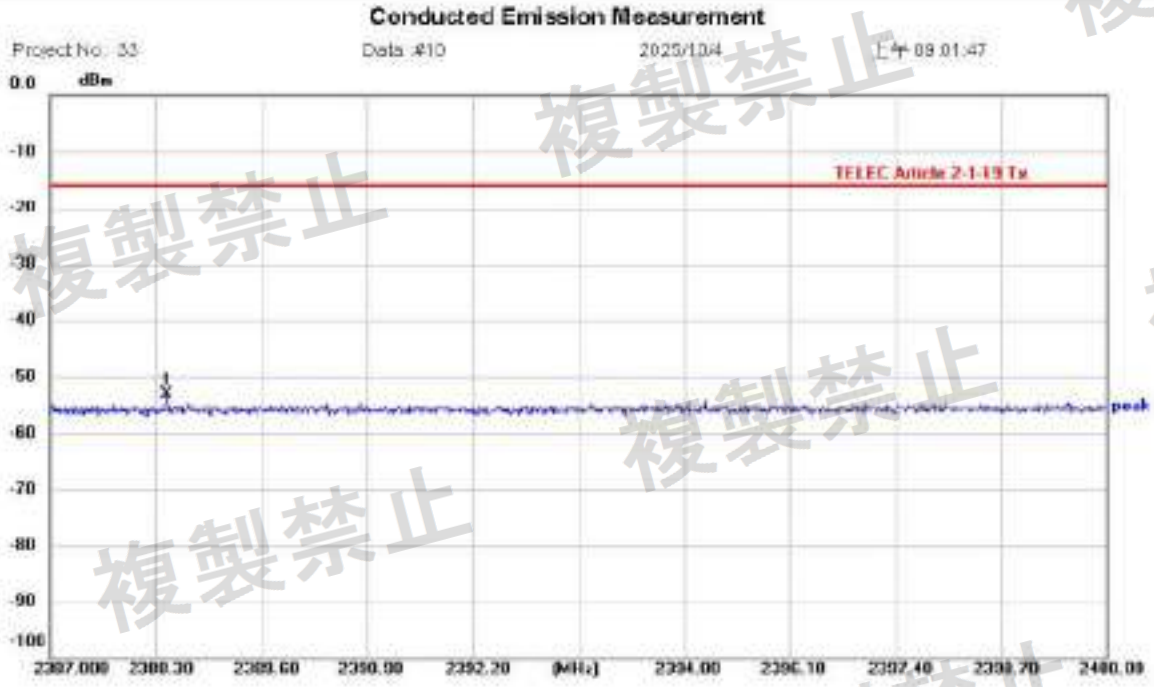


Site: Chamber 04
Limit: TELEC Article 2-1-19 Tx
EUT: W6M22508-24659
M/N:
Mode: Tx BLE 1M CH39
Note:

Polarization:
Power: 3.7 Vdc
Distance:

Temperature: 25.8 (C)
Humidity: 56 %RH

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	2388.430	-63.42	10.36	-53.06	-16.00	-37.06	peak			P	

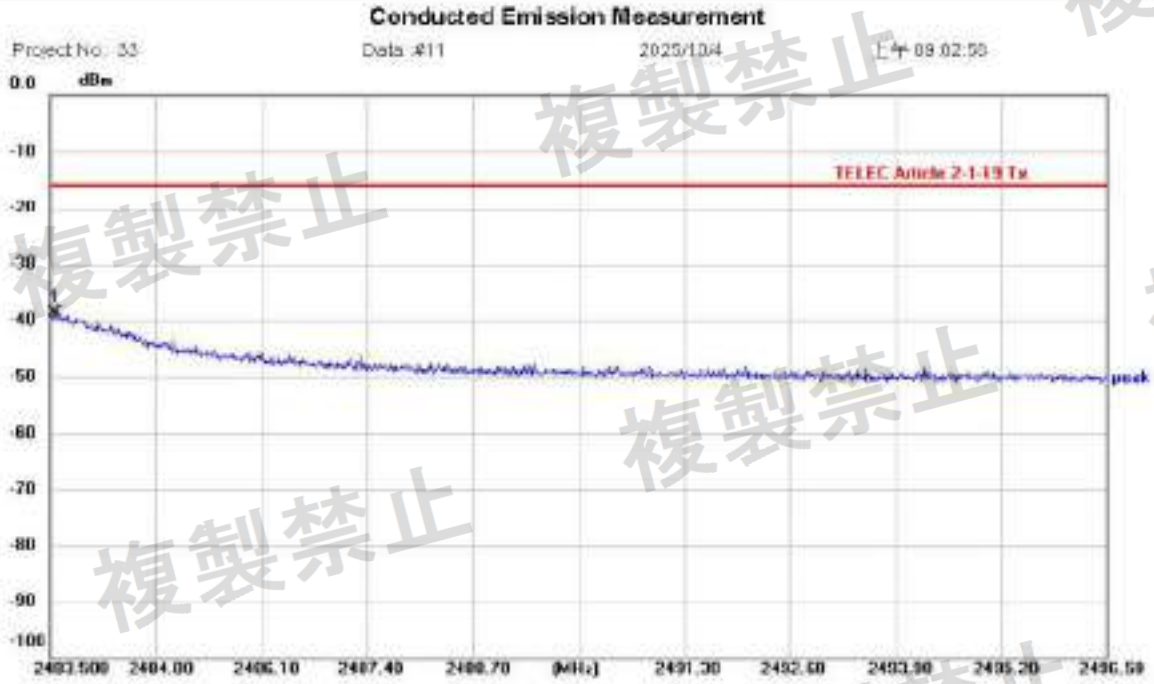


Site: Chamber 04
Limit: TELEC Article 2-1-19 Tx
EUT: W6M22508-24659
M/N:
Mode: Tx BLE 1M CH39
Note:

Polarization:
Power: 3.3 Vdc
Distance:

Temperature: 23.8 (C)
Humidity: 56 %RH

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	2483.565	-48.92	10.36	-38.56	-16.00	-22.56	peak			P	

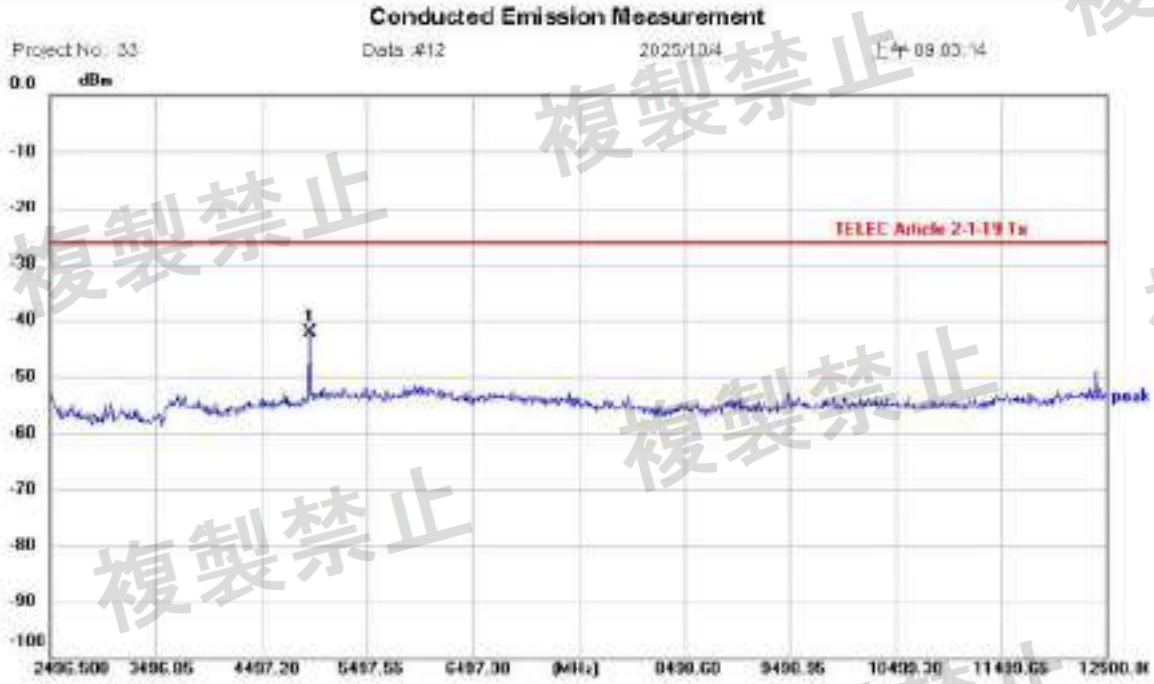


Site: Chamber 04
Limit: TELEC Article 2-1-19 Tx
EUT: W6M22508-24659
M/N:
Mode: Tx BLE 1M CH39
Note:

Polarization:
Power: 3.2 Vdc
Distance:

Temperature: 23.8 (C)
Humidity: 56 %RH

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	4957.361	-52.61	10.61	-42.00	-26.00	-16.00	peak			P	

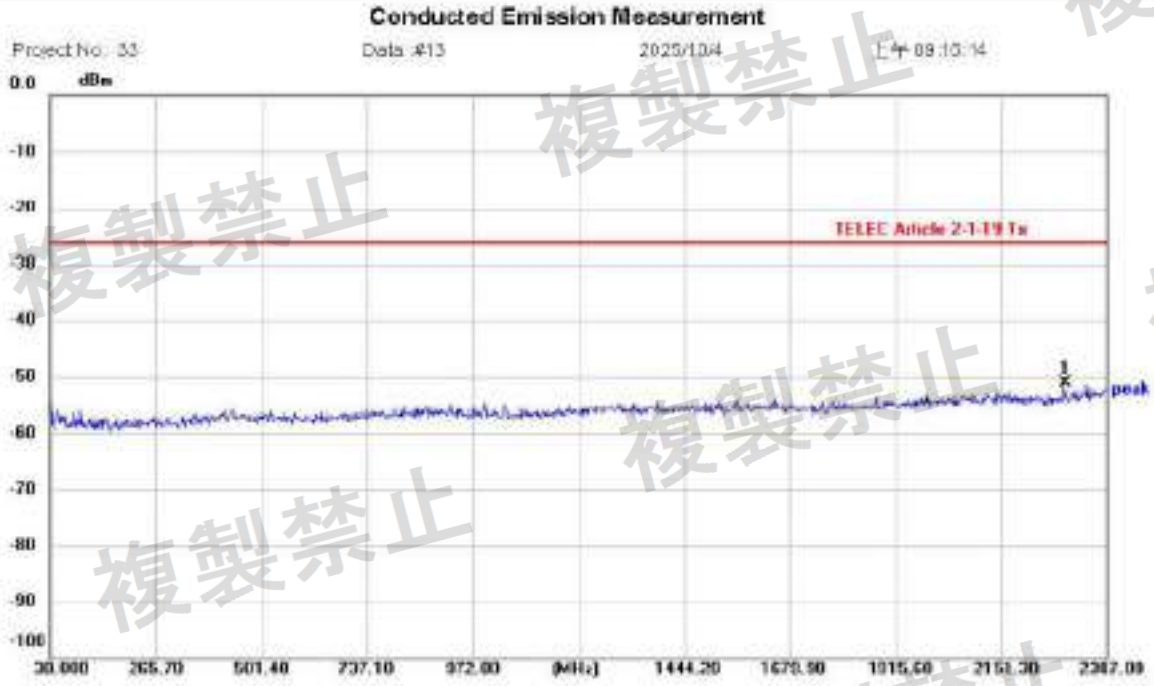


Site: Chamber 04
Limit: TELEC Article 2-1-19 Tx
EUT: W6M22508-24659
M/N:
Mode: Tx BLE 2M CH00
Note:

Polarization:
Power: 3.3 Vdc
Distance:

Temperature: 23.8 (C)
Humidity: 56 %RH

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	2290.363	-61.40	10.34	-51.06	-26.00	-25.06	peak			P	

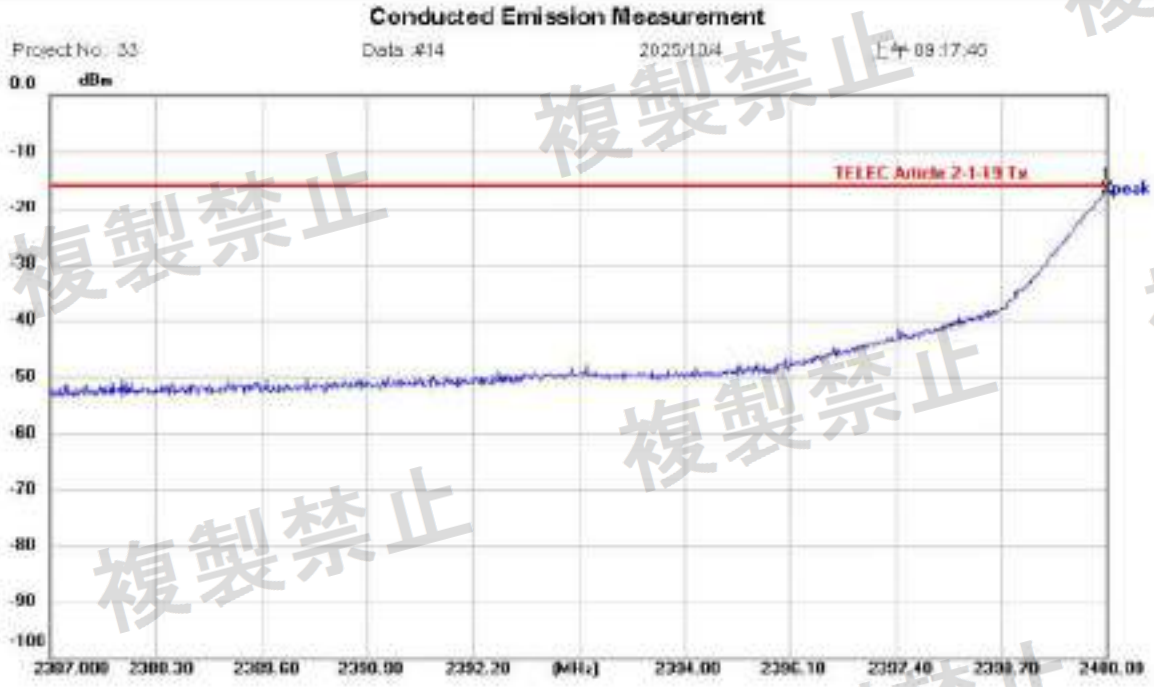


Site: Chamber 04
Limit: TELEC Article 2-1-19 Tx
EUT: W6M22508-24659
M/N:
Mode: Tx BLE 2M CH00
Note:

Polarization:
Power: 3.3 Vdc
Distance:

Temperature: 25.8 (°C)
Humidity: 56 %RH

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	2400.000	-27.15	10.36	-16.79	-16.00	-0.79	peak			P	

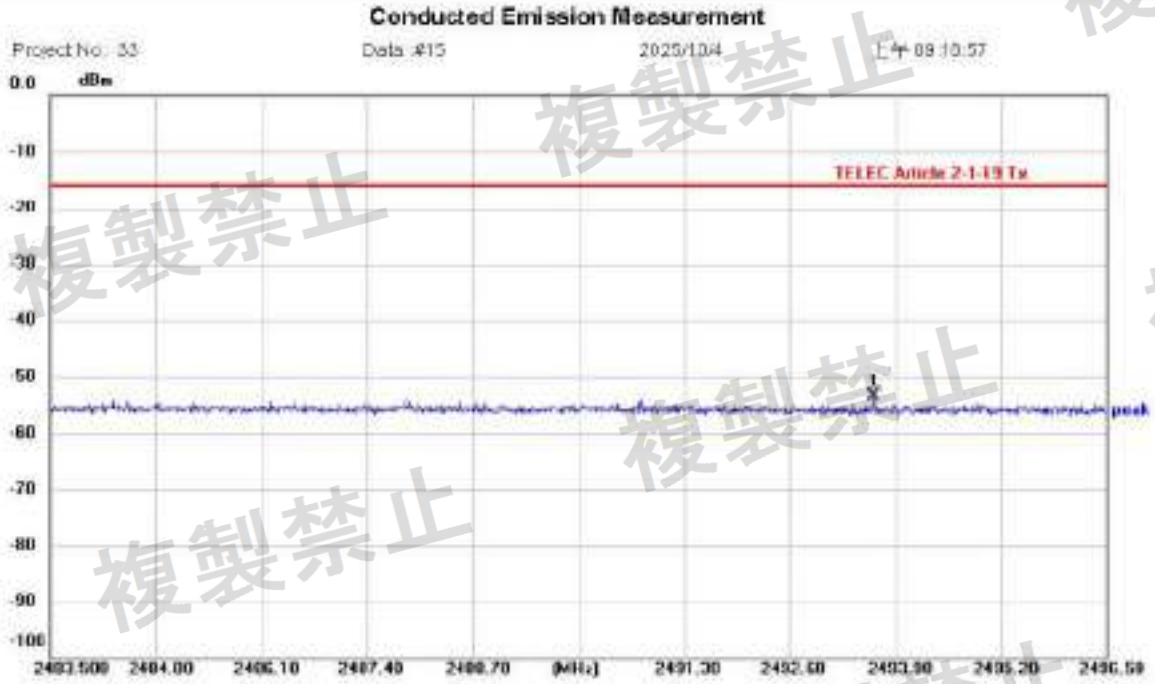


Site: Chamber 04
Limit: TELEC Article 2-1-19 Tx
EUT: W6M22508-24659
M/N:
Mode: Tx BLE 2M CH00
Note:

Polarization:
Power: 3.3 Vdc
Distance:

Temperature: 23.8 (C)
Humidity: 56 %RH

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	2493.627	-63.77	10.36	-53.41	-16.00	-37.41	peak			P	

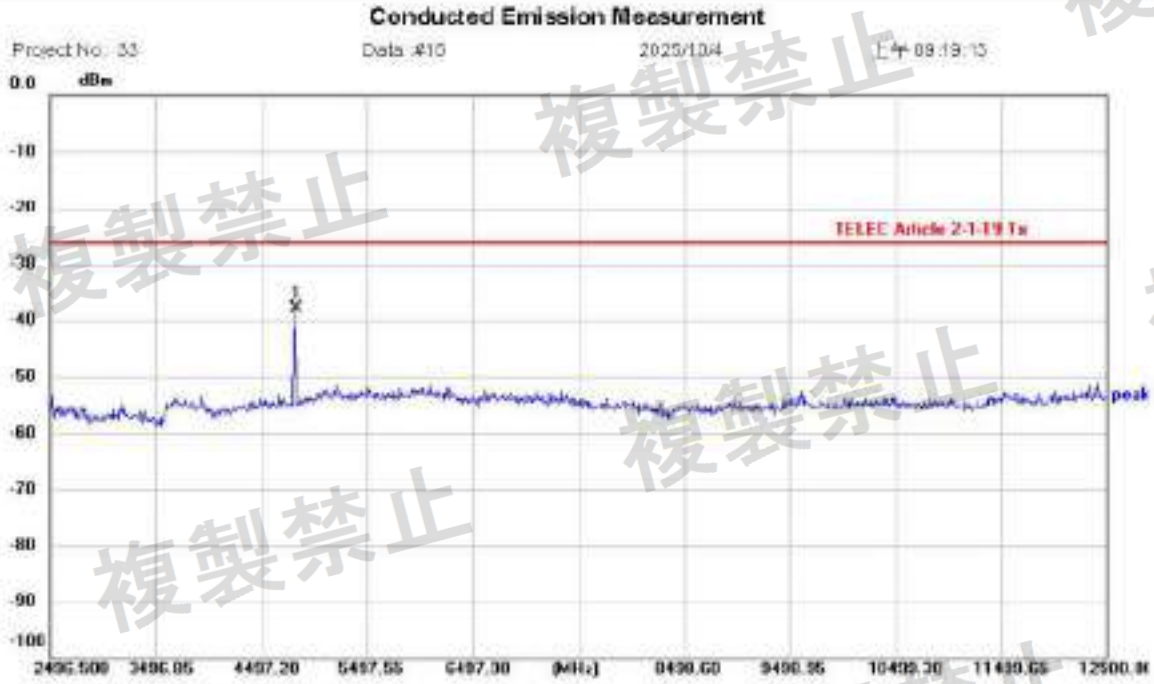


Site: Chamber 04
Limit: TELEC Article 2-1-19 Tx
EUT: W6M22508-24659
M/N:
Mode: Tx BLE 2M CH00
Note:

Polarization:
Power: 3.2 Vdc
Distance:

Temperature: 23.8 (C)
Humidity: 56 %RH

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	4807.309	-48.53	10.60	-37.93	-26.00	-11.93	peak			P	

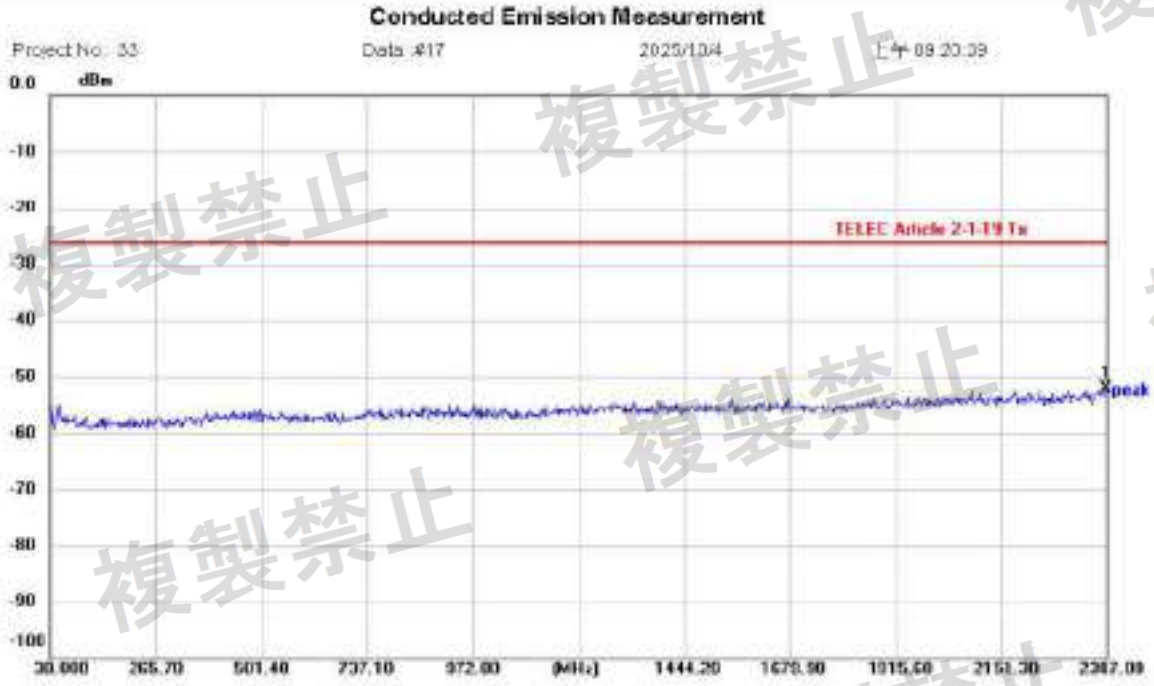


Site: Chamber 04
Limit: TELEC Article 2-1-19 Tx
EUT: W6M22508-24659
M/N:
Mode: Tx BLE 2M CH19
Note:

Polarization:
Power: 3.3 Vdc
Distance:

Temperature: 25.8 (C)
Humidity: 56 %RH

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	2384.643	-62.45	10.36	-52.09	-26.00	-26.09	peak			P	

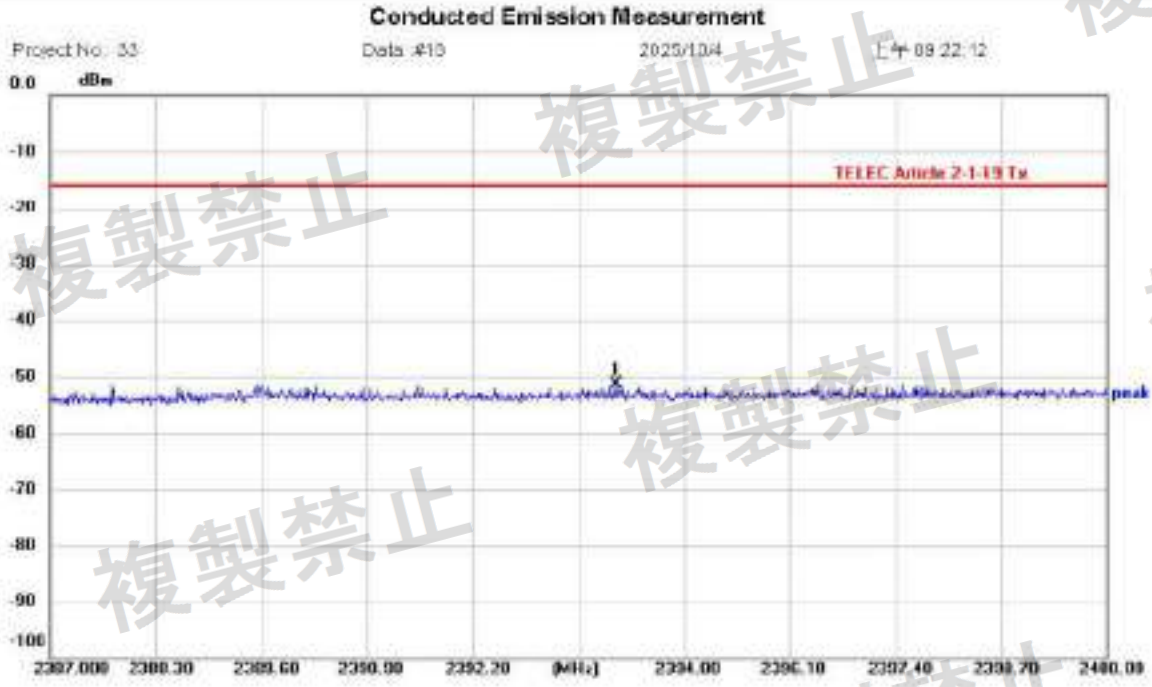


Site: Chamber 04
Limit: TELEC Article 2-1-19 Tx
EUT: W6M22508-24659
M/N:
Mode: Tx BLE 2M CH19
Note:

Polarization:
Power: 3.3 Vdc
Distance:

Temperature: 23.8 (C)
Humidity: 56 %RH

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	2393.955	-61.62	10.36	-51.26	-16.00	-35.26	peak			P	

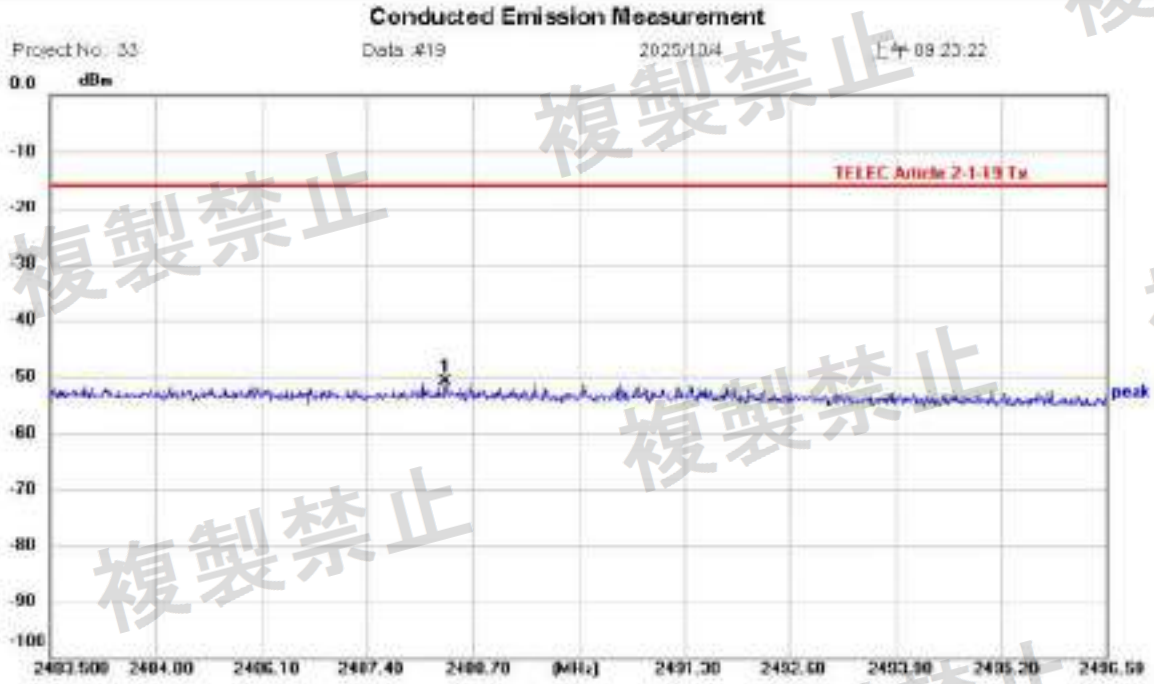


Site: Chamber 04
Limit: TELEC Article 2-1-19 Tx
EUT: W6M22508-24659
M/N:
Mode: Tx BLE 2M CH19
Note:

Polarization:
Power: 3.3 Vdc
Distance:

Temperature: 23.8 (C)
Humidity: 56 %RH

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	2488.362	-61.31	10.36	-50.95	-16.00	-34.95	peak			P	

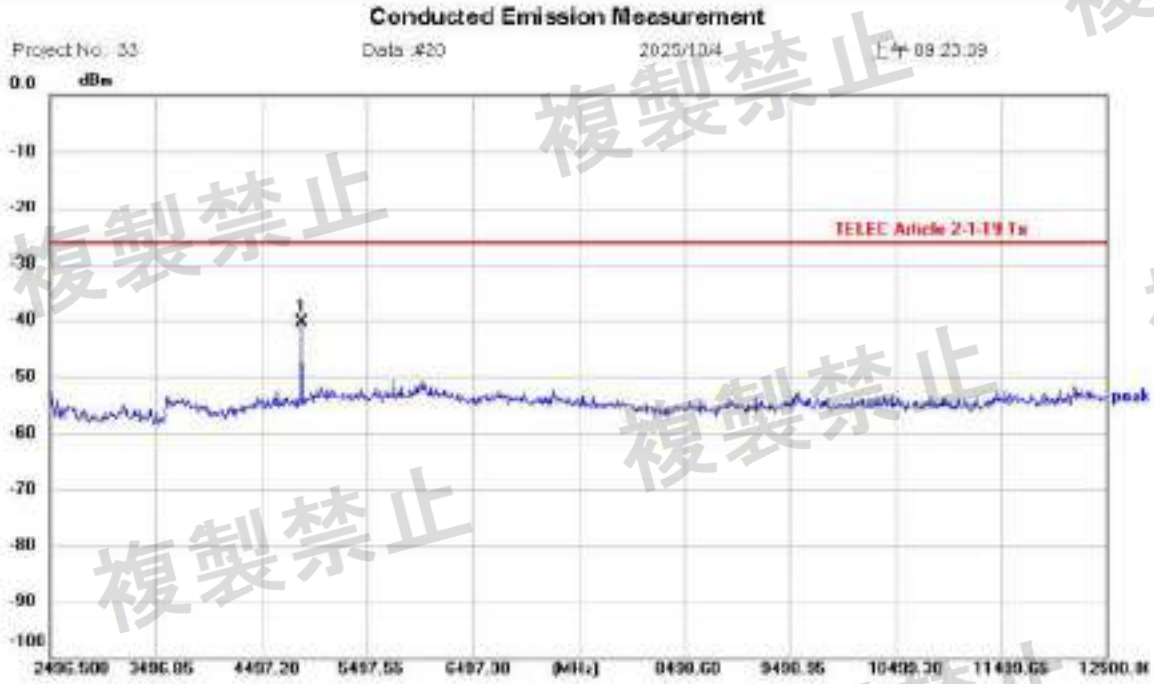


Site: Chamber 04
Limit: TELEC Article 2-1-19 Tx
EUT: W6M22508-24659
M/N:
Mode: Tx BLE 2M CH19
Note:

Polarization:
Power: 3.3 Vdc
Distance:

Temperature: 25.8 (C)
Humidity: 56 %RH

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	4877.333	-50.91	10.57	-40.34	-26.00	-14.34	peak			P	

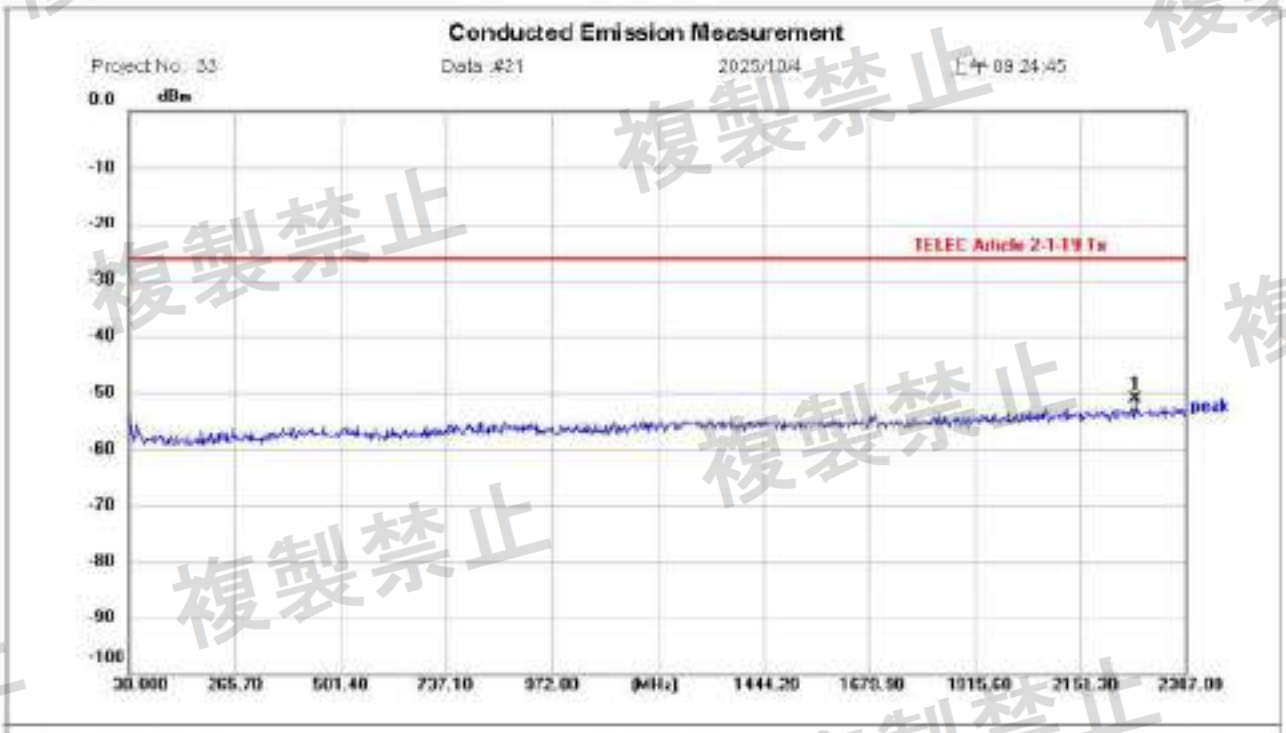


Site: Chamber 04
Limit: TELEC Article 2-1-19 Tx
EUT: W6M22508-24659
M/N:
Mode: Tx BLE 2M CH39
Note:

Polarization:
Power: 3.3 Vdc
Distance:

Temperature: 23.8 (C)
Humidity: 56 %RH

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	2273.864	-61.42	10.34	-51.08	-26.00	-25.08	peak			P	

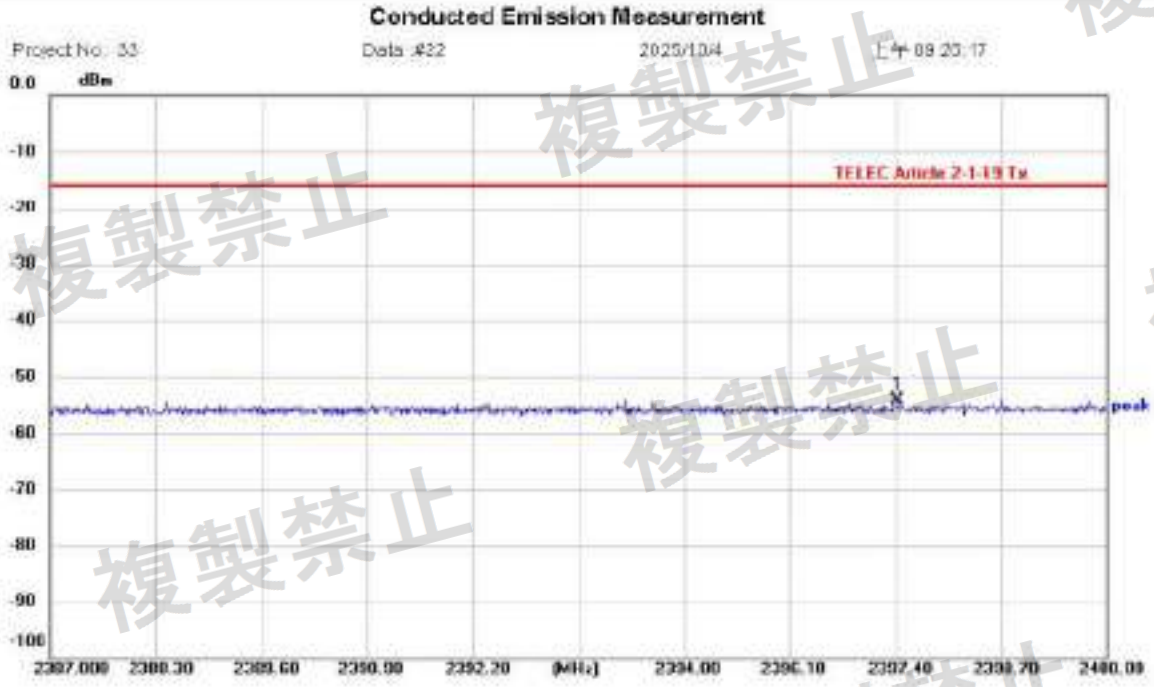


Site: Chamber 04
Limit: TELEC Article 2-1-19 Tx
EUT: W6M22508-24659
M/N:
Mode: Tx BLE 2M CH39
Note:

Polarization:
Power: 3.3 Vdc
Distance:

Temperature: 25.8 (C)
Humidity: 56 %RH

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	2397.426	-64.54	10.36	-54.18	-16.00	-38.18	peak			P	

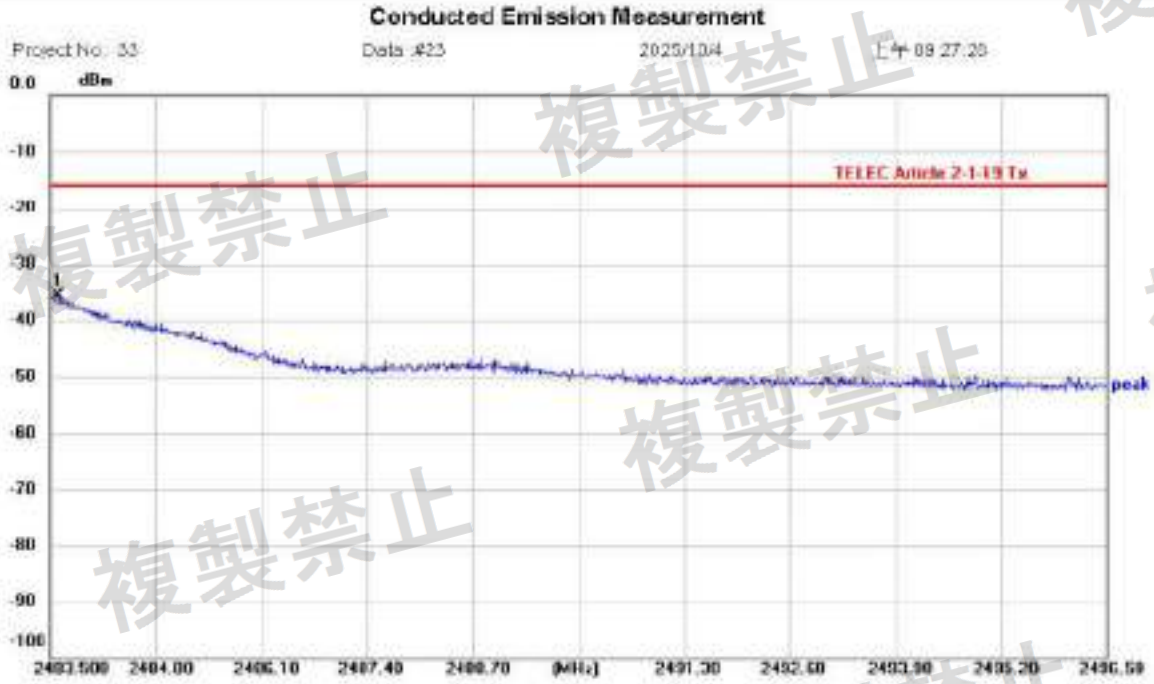


Site: Chamber 04
Limit: TELEC Article 2-1-19 Tx
EUT: W6M22508-24659
M/N:
Mode: Tx BLE 2M CH39
Note:

Polarization:
Power: 3.3 Vdc
Distance:

Temperature: 23.8 (C)
Humidity: 56 %RH

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	2483.591	-46.05	10.36	-35.69	-16.00	-19.69	peak			P	

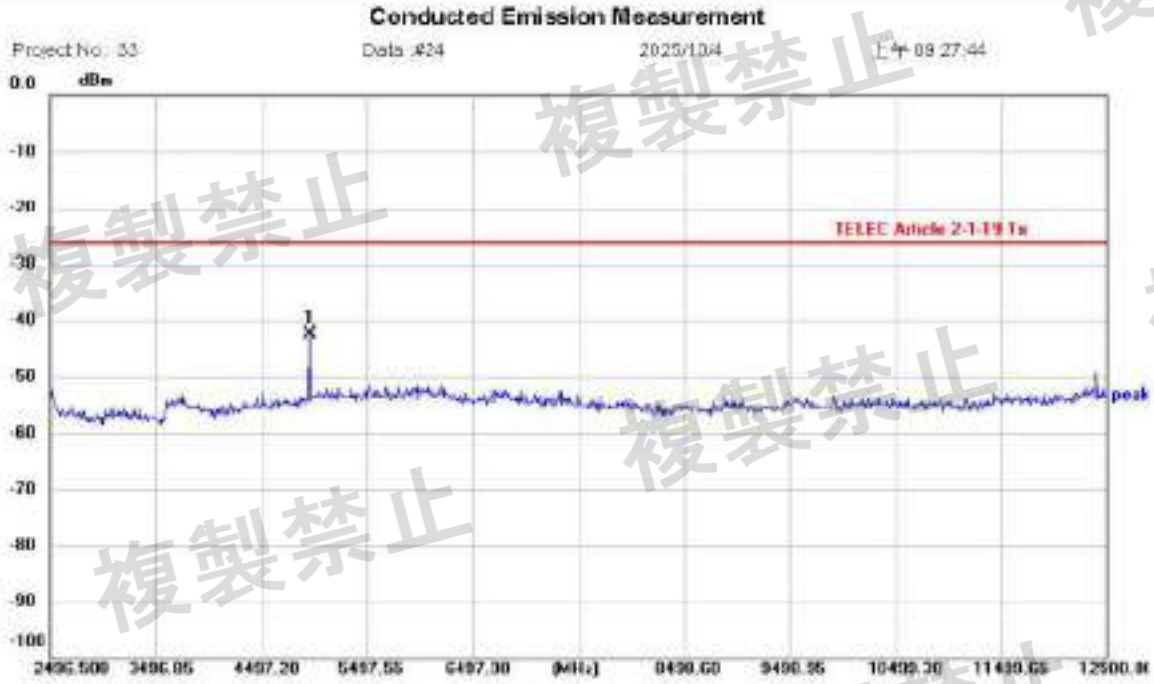


Site: Chamber 04
Limit: TELEC Article 2-1-19 Tx
EUT: W6M22508-24659
M/N:
Mode: Tx BLE 2M CH39
Note:

Polarization:
Power: 3.3 Vdc
Distance:


Temperature: 23.8 (C)
Humidity: 56 %RH

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	4957.361	-52.86	10.61	-42.25	-26.00	-16.25	peak			P	

Inverted F Antenna

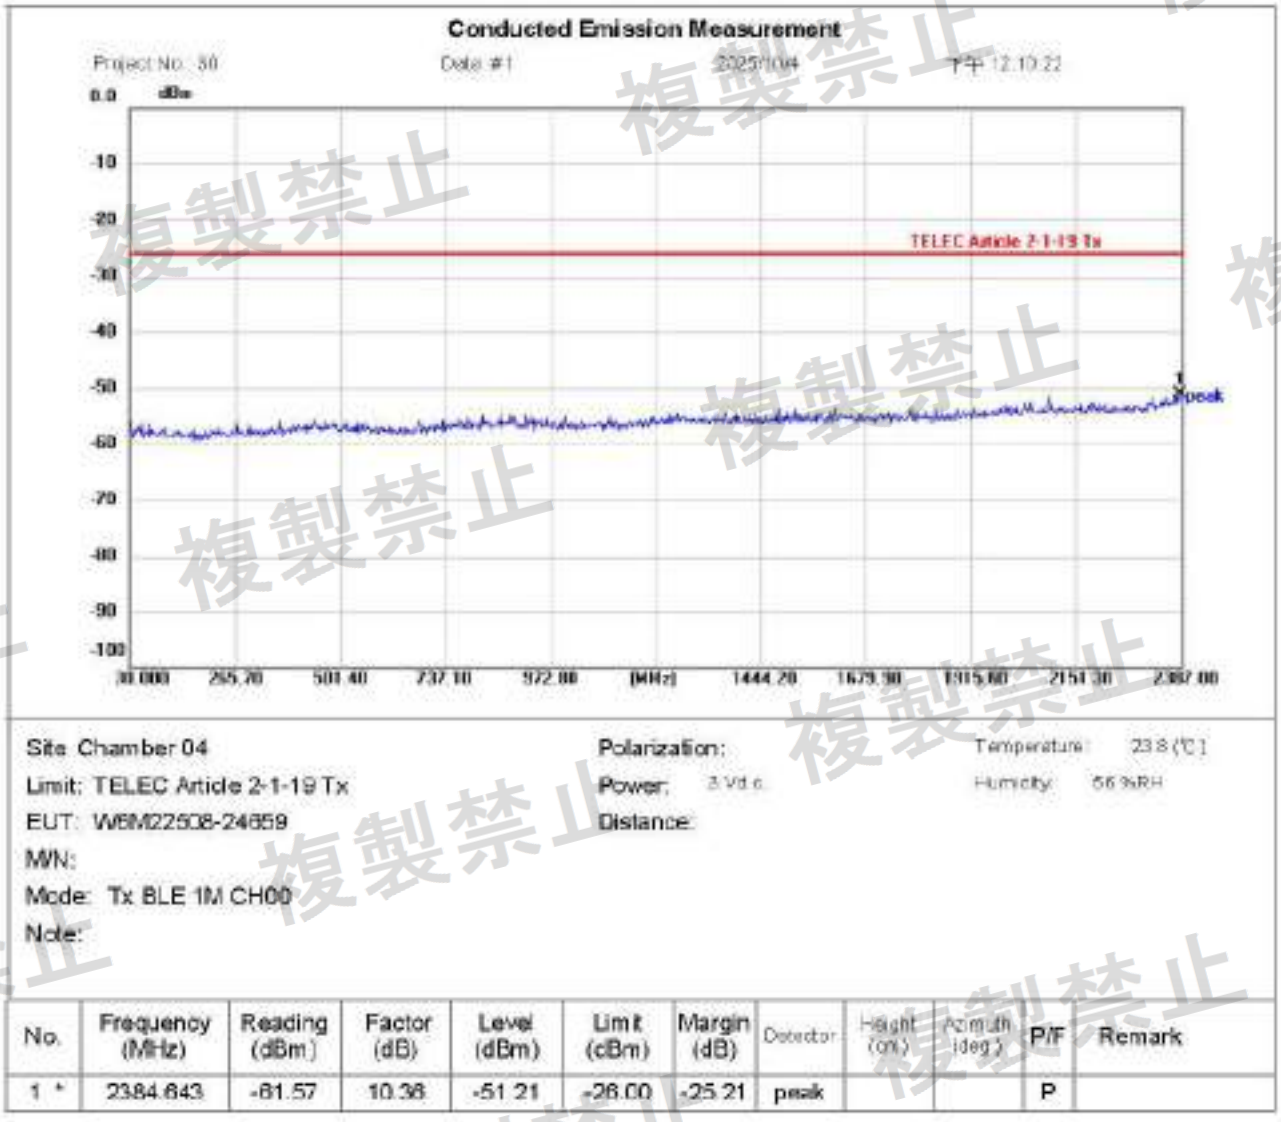

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	2384.643	-81.57	10.36	-51.21	-26.00	-25.21	peak			P	

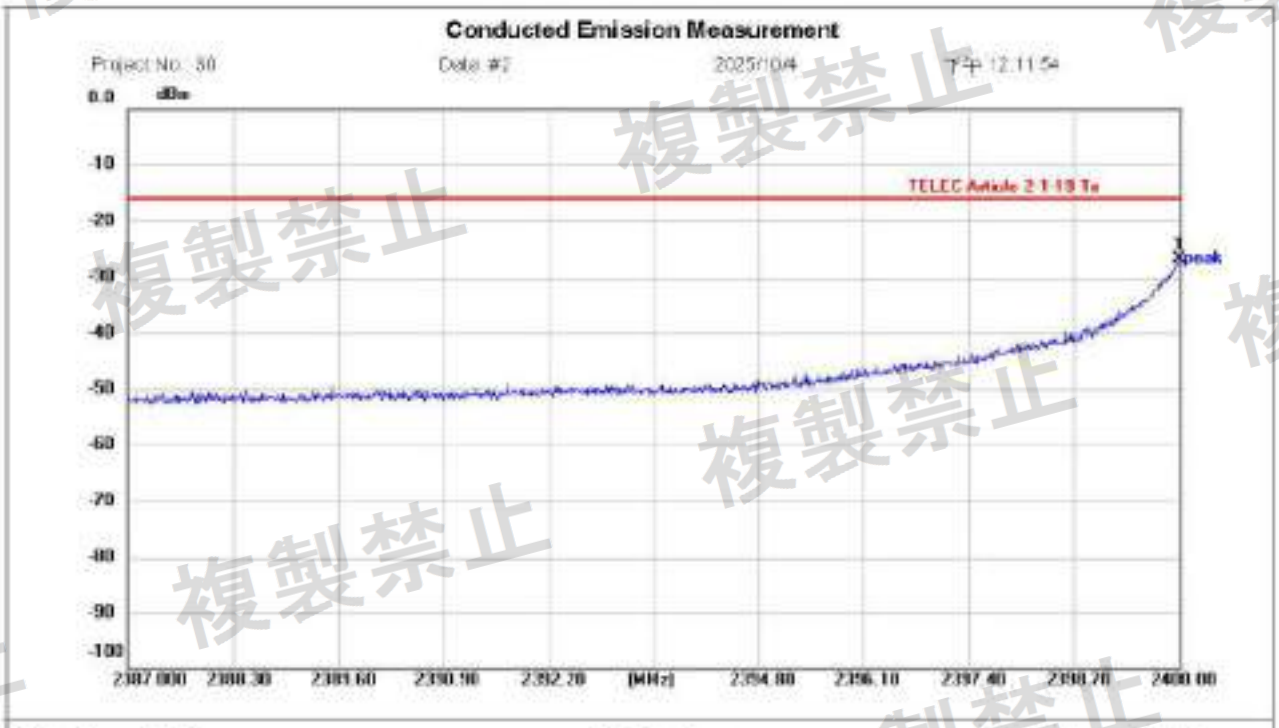


Site: Chamber 04
Limit: TELEC Article 2-1-19 Tx
EUT: W6M22508-24659
M/N:
Mode: Tx BLE 1M CH00
Note:

Polarization:
Power: 3 Vdc
Distance:

Temperature: 23.8 (°C)
Humidity: 56 %RH

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	2400.000	-37.31	10.36	-26.95	-16.00	-10.95	peak			P	

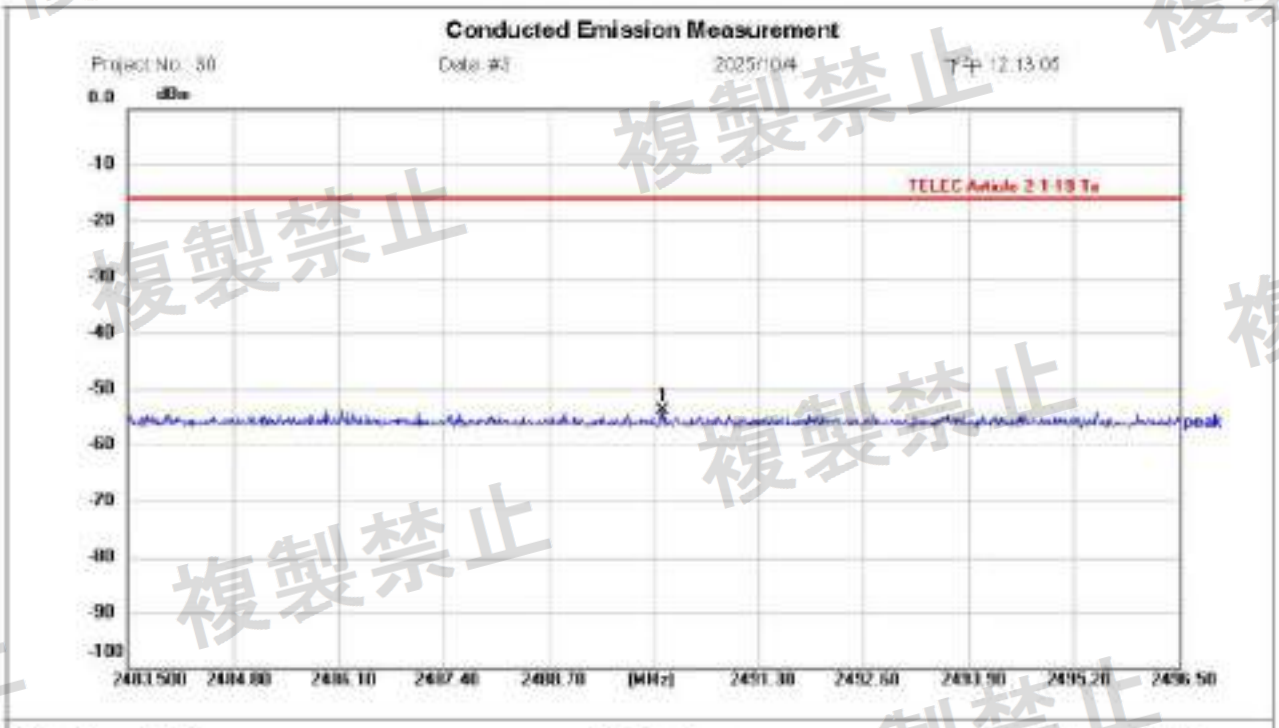


Site: Chamber 04
Limit: TELEC Article 2-1-19 Tx
EUT: W6M22508-24659
M/N:
Mode: Tx BLE 1M CH00
Note:

Polarization:
Power: 3 Vd.c
Distance:

Temperature: 23.8 (°C)
Humidity: 56 %RH

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	2490.117	-84.17	10.36	-53.81	-16.00	-37.81	peak			P	

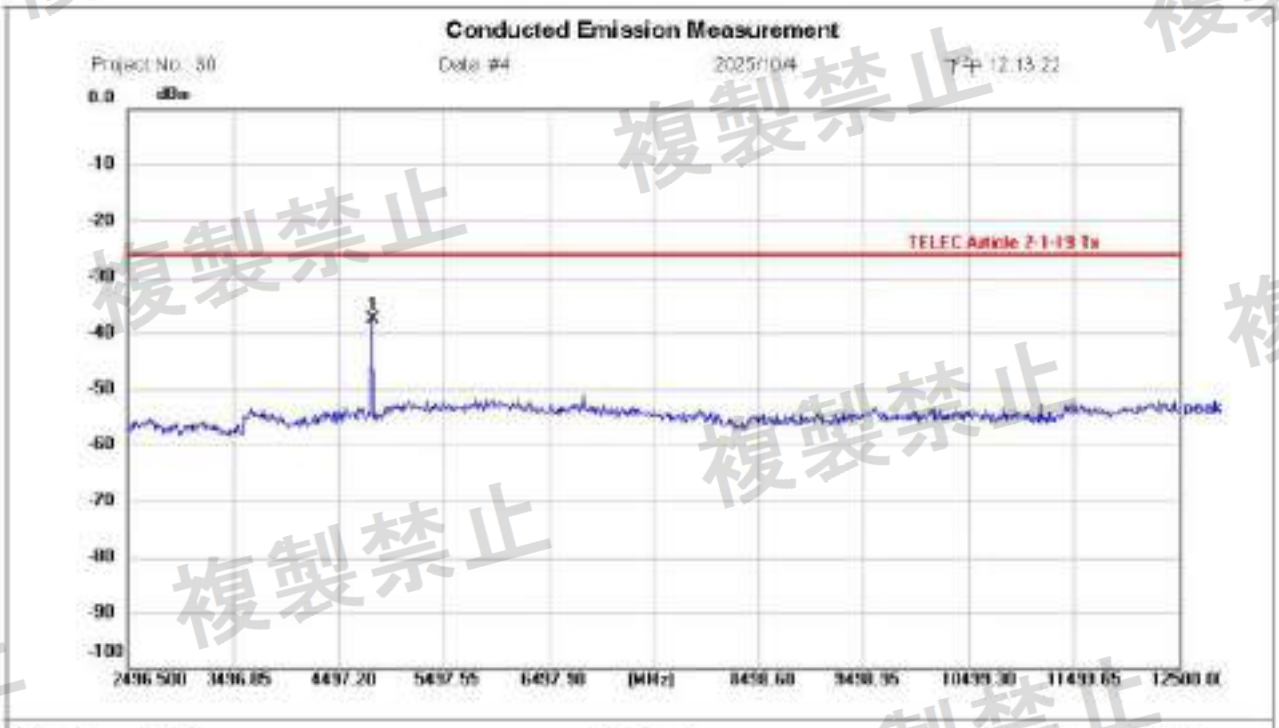


Site: Chamber 04
Limit: TELEC Article 2-1-19 Tx
EUT: W6M22508-24659
M/N:
Mode: Tx BLE 1M CH00
Note:

Polarization:
Power: 3 Vdc
Distance:

Temperature: 23.8 (°C)
Humidity: 56 %RH

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	4807.309	-48.17	10.60	-37.57	-26.00	-11.57	peak			P	

Conducted Emission Measurement

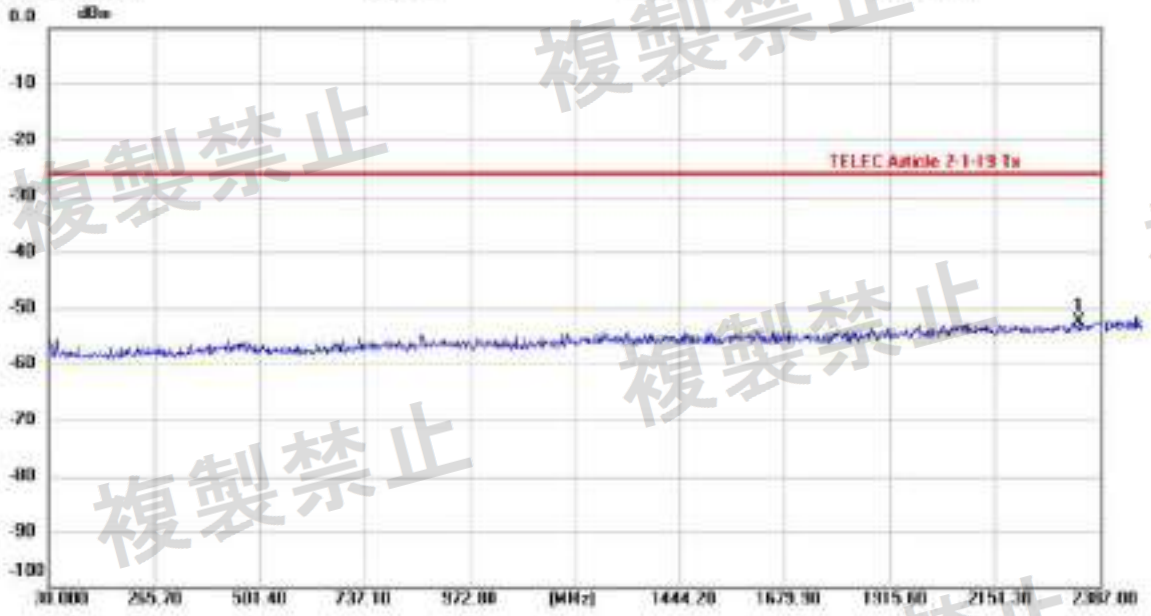


Site: Chamber 04
Limit: TELEC Article 2-1-19 Tx
EUT: W6M22508-24659
M/N:
Mode: Tx BLE 1M CH19
Note:

Polarization:
Power: 3 Vd.c
Distance:

Temperature: 23.8 (°C)
Humidity: 56 %RH

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	2339.860	-82.73	10.35	-52.38	-26.00	-26.38	peak			P	

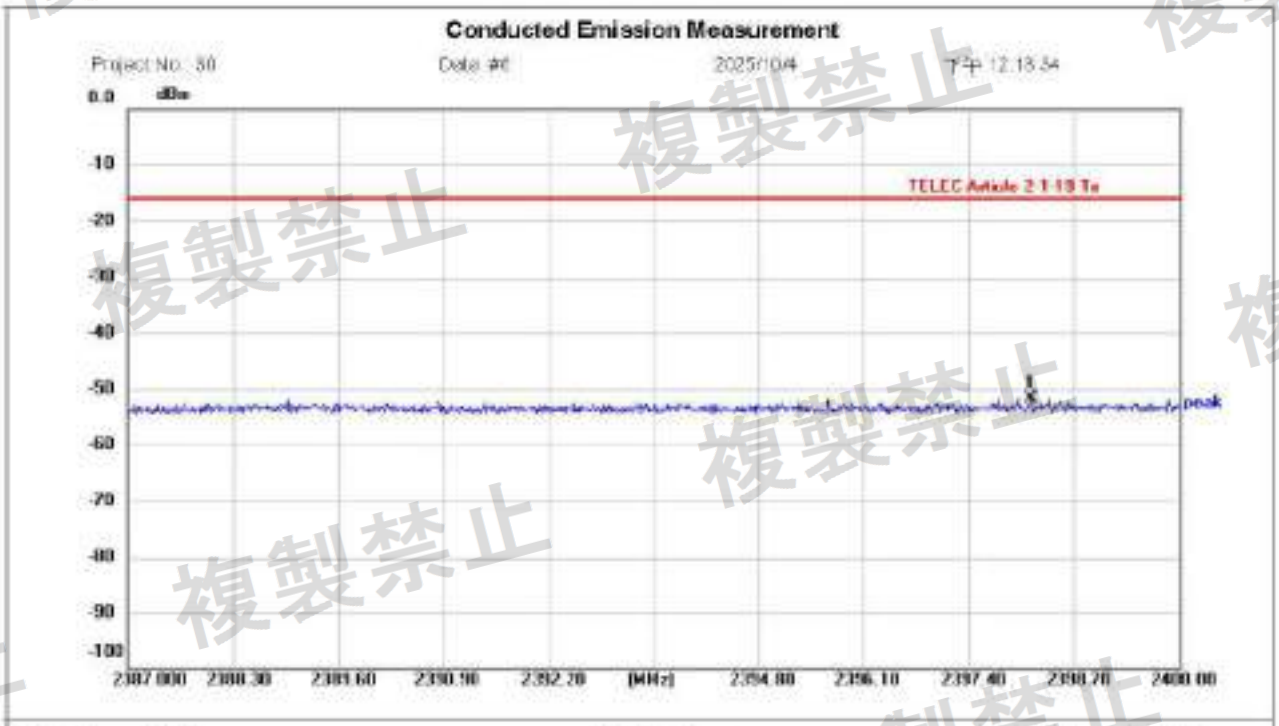


Site: Chamber 04
Limit: TELEC Article 2-1-19 Tx
EUT: W6M22508-24659
M/N:
Mode: Tx BLE 1M CH19
Note:

Polarization:
Power: 3 Vd c
Distance:

Temperature: 23.8 (°C)
Humidity: 56 %RH

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	2398.167	-82.02	10.38	-51.66	-16.00	-35.66	peak			P	

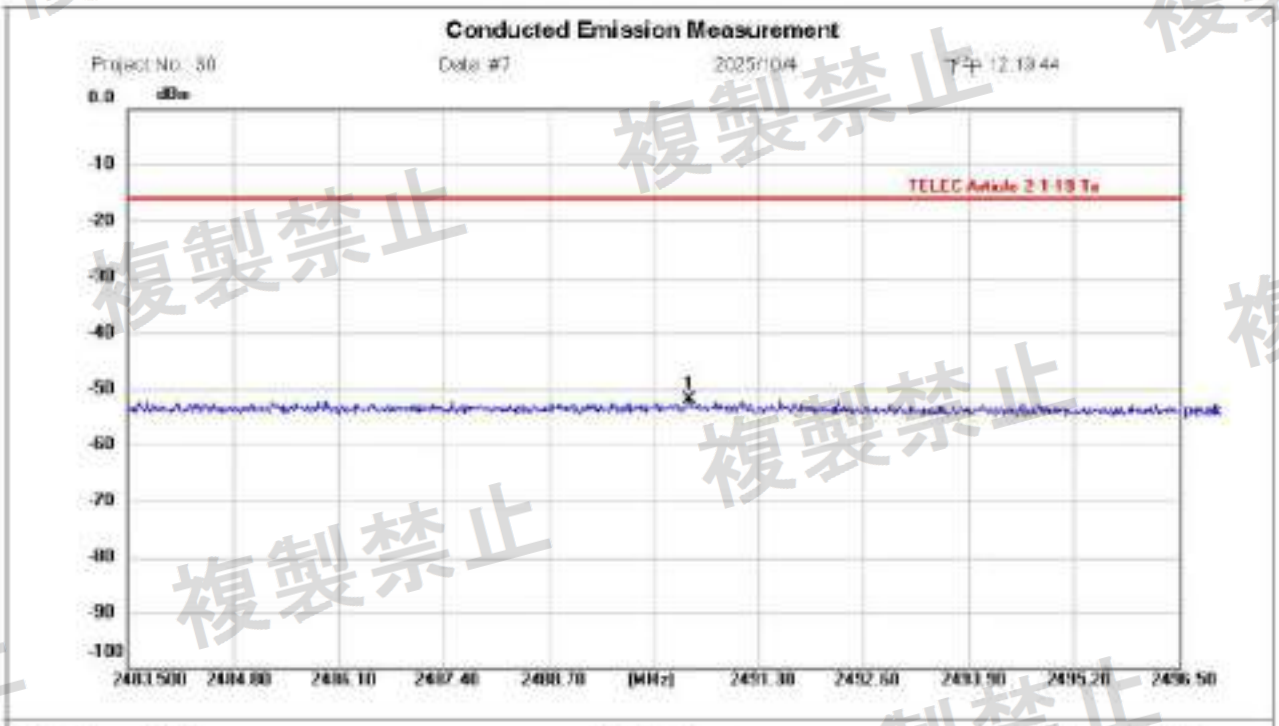


Site: Chamber 04
Limit: TELEC Article 2-1-19 Tx
EUT: W6M22508-24659
M/N:
Mode: Tx BLE 1M CH19
Note:

Polarization:
Power: 3 Vdc
Distance:

Temperature: 23.8 (°C)
Humidity: 56 %RH

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	2490.442	-82.19	10.36	-51.83	-16.00	-35.83	peak			P	

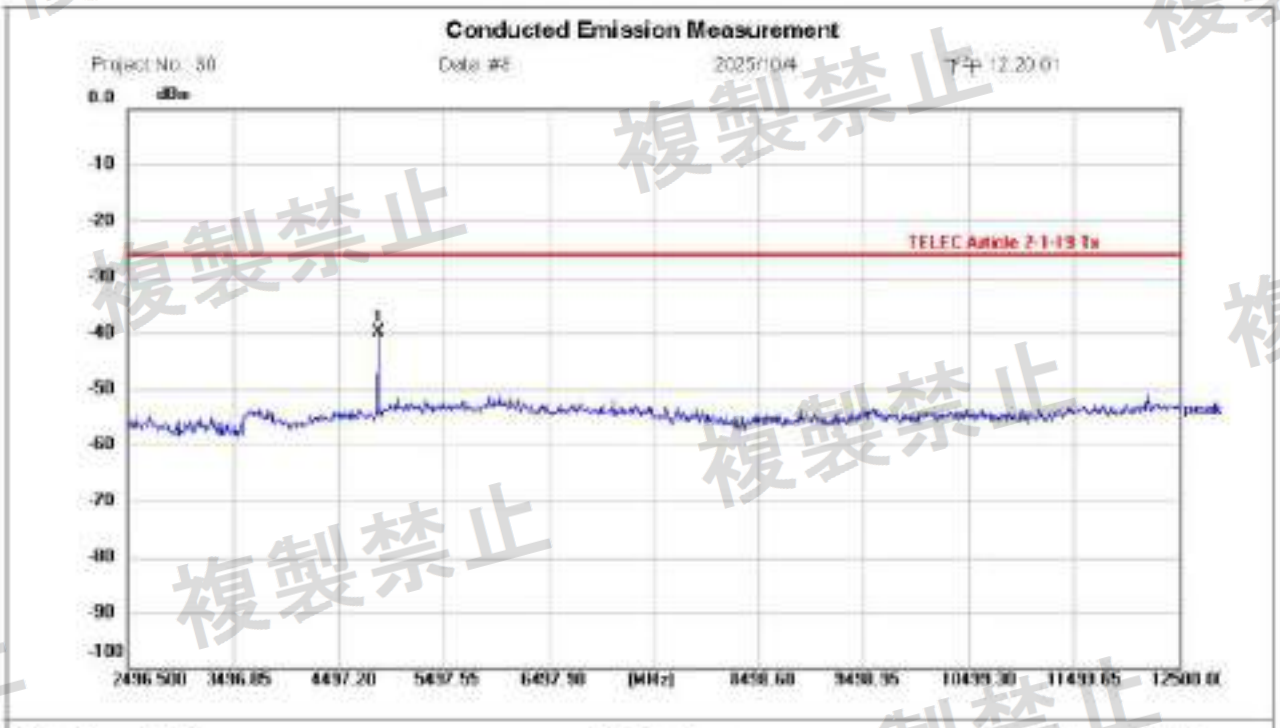


Site: Chamber 04
Limit: TELEC Article 2-1-19 Tx
EUT: W6M22508-24659
M/N:
Mode: Tx BLE 1M CH19
Note:

Polarization:
Power: 3 Vdc
Distance:

Temperature: 23.8 (°C)
Humidity: 56 %RH

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	4877.333	-50.35	10.57	-39.78	-26.00	-13.78	peak			P	

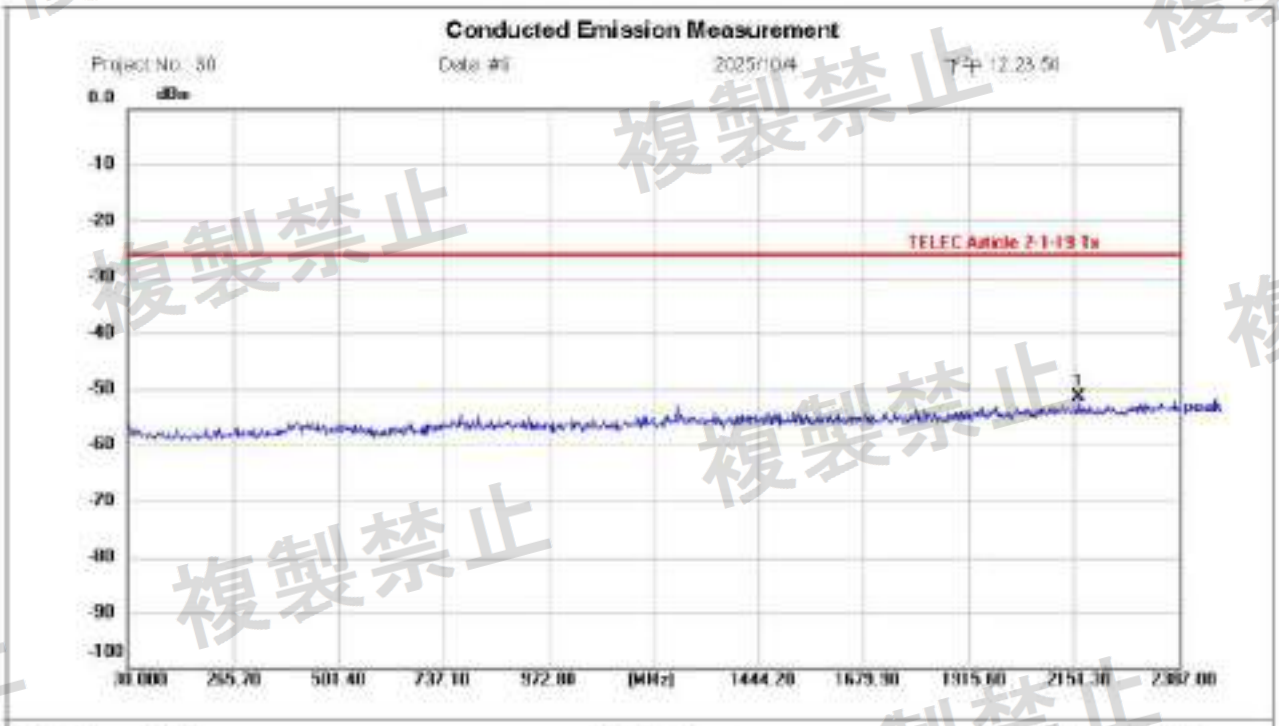


Site: Chamber 04
Limit: TELEC Article 2-1-19 Tx
EUT: W6M22508-24659
M/N:
Mode: Tx BLE 1M CH39
Note:

Polarization:
Power: 3 Vd.c
Distance:

Temperature: 23.8 (°C)
Humidity: 56 %RH

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	2163.085	-61.80	10.34	-51.46	-26.00	-25.46	peak			P	

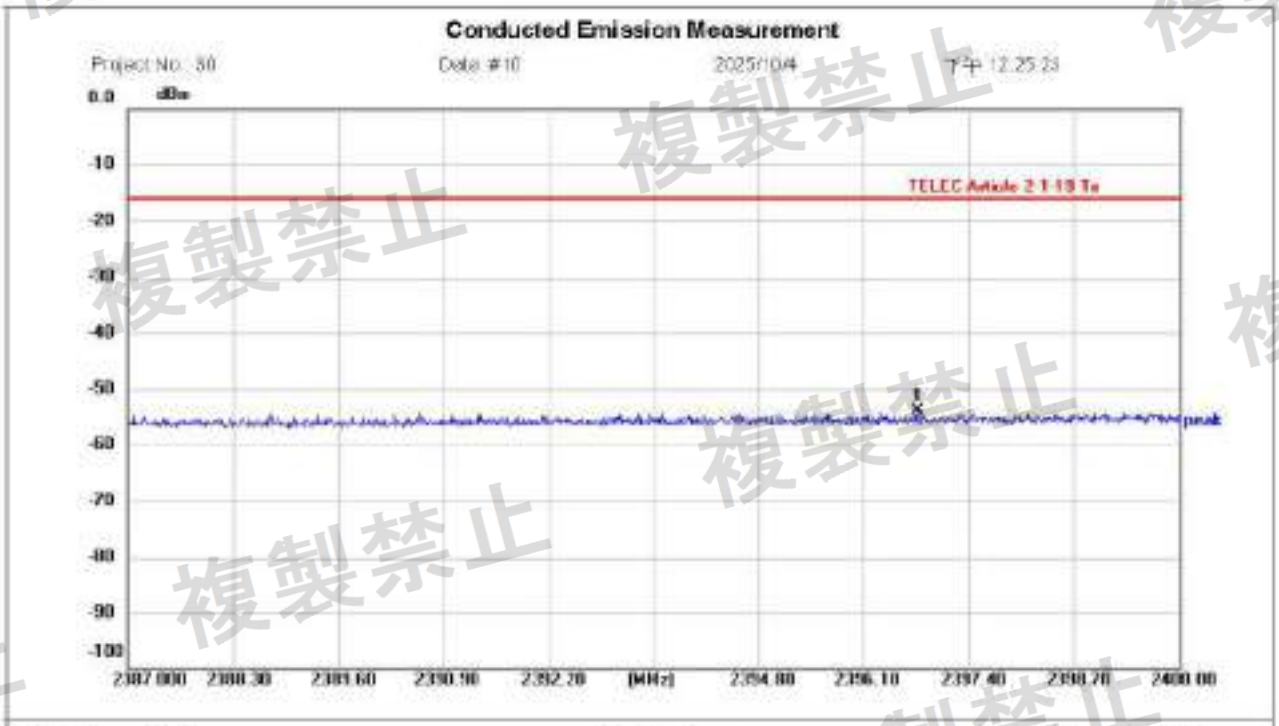


Site: Chamber 04
Limit: TELEC Article 2-1-19 Tx
EUT: W6M22508-24659
M/N:
Mode: Tx BLE 1M CH39
Note:

Polarization:
Power: 3 Vd.c
Distance:

Temperature: 23.8 (°C)
Humidity: 56 %RH

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	2398.783	-64.32	10.38	-53.96	-16.00	-37.96	peak			P	

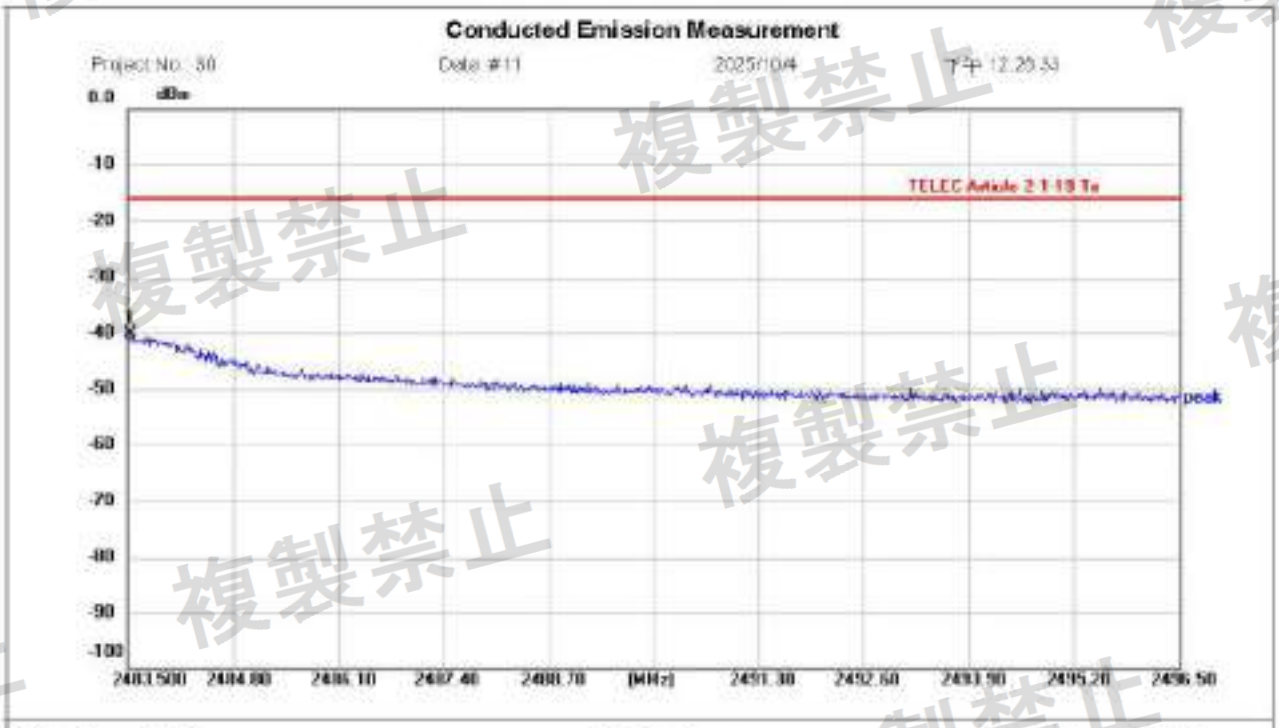


Site: Chamber 04
Limit: TELEC Article 2-1-19 Tx
EUT: W6M22508-24659
M/N:
Mode: Tx BLE 1M CH39
Note:

Polarization:
Power: 3 Vd.c
Distance:

Temperature: 23.8 (°C)
Humidity: 56 %RH

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	2483.526	-50.50	10.36	-40.14	-16.00	-24.14	peak			P	

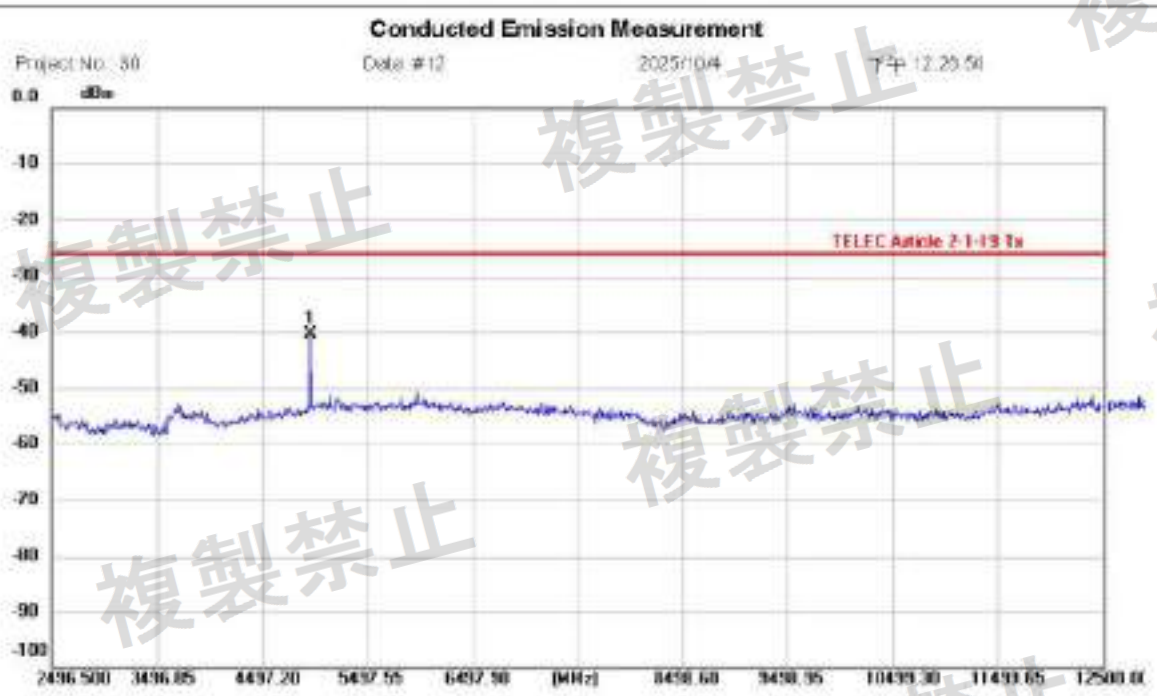


Site: Chamber 04
Limit: TELEC Article 2-1-19 Tx
EUT: W6M22508-24659
M/N:
Mode: Tx BLE 1M CH39
Note:

Polarization:
Power: 3 Vd.c
Distance:

Temperature: 23.8 (°C)
Humidity: 56 %RH

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	4957.361	-51.05	10.61	-40.44	-26.00	-14.44	peak			P	

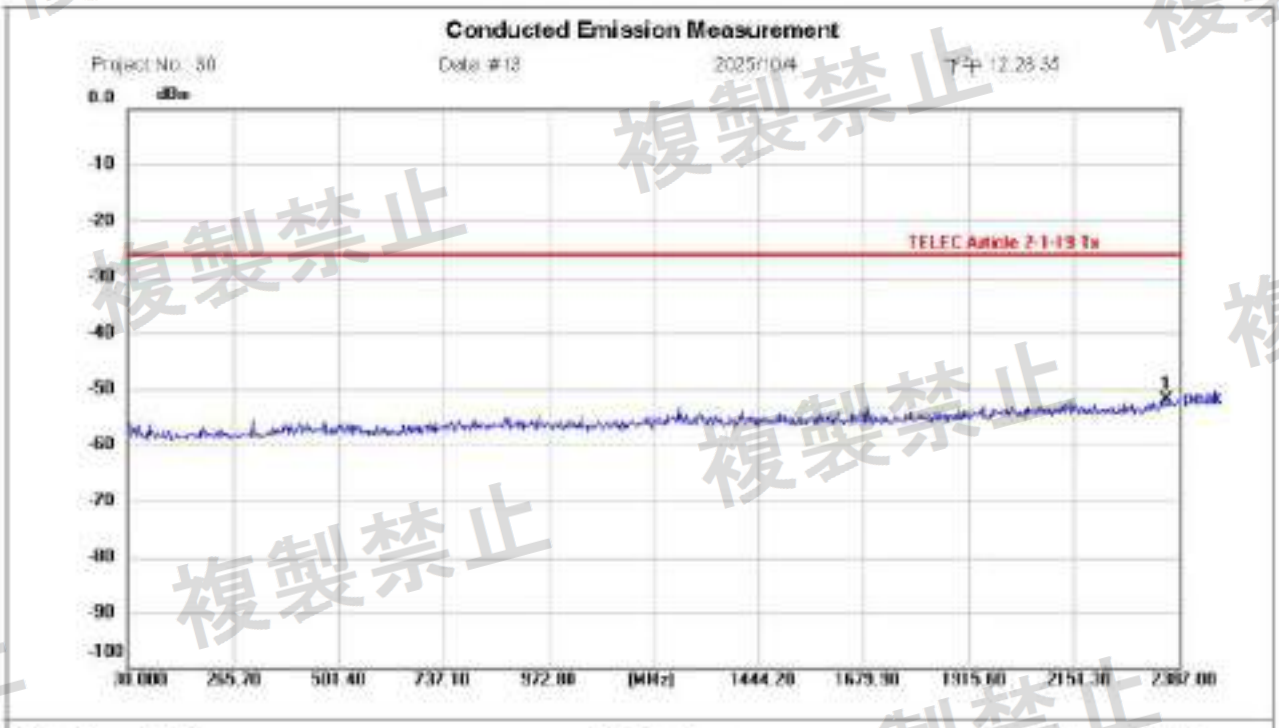


Site: Chamber 04
Limit: TELEC Article 2-1-19 Tx
EUT: W6M22508-24659
M/N:
Mode: Tx BLE 2M CH00
Note:

Polarization:
Power: 3 Vd.c.
Distance:

Temperature: 23.8 (°C)
Humidity: 56 %RH

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	2358.359	-82.34	10.35	-51.99	-26.00	-25.99	peak			P	

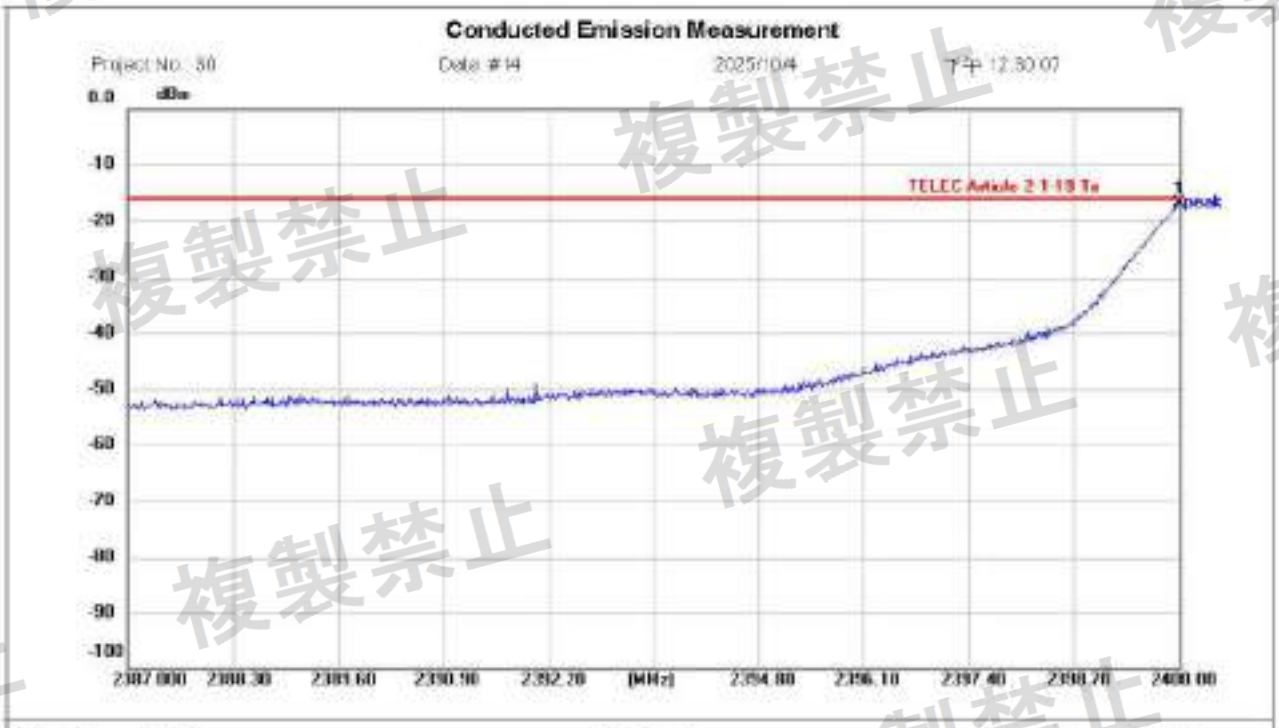


Site: Chamber 04
Limit: TELEC Article 2-1-19 Tx
EUT: W6M22508-24659
M/N:
Mode: Tx BLE 2M CH00
Note:

Polarization:
Power: 3 Vdc
Distance:

Temperature: 23.8 (°C)
Humidity: 56 %RH

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	2400.000	-27.15	10.36	-16.79	-16.00	-0.79	peak			P	

Conducted Emission Measurement

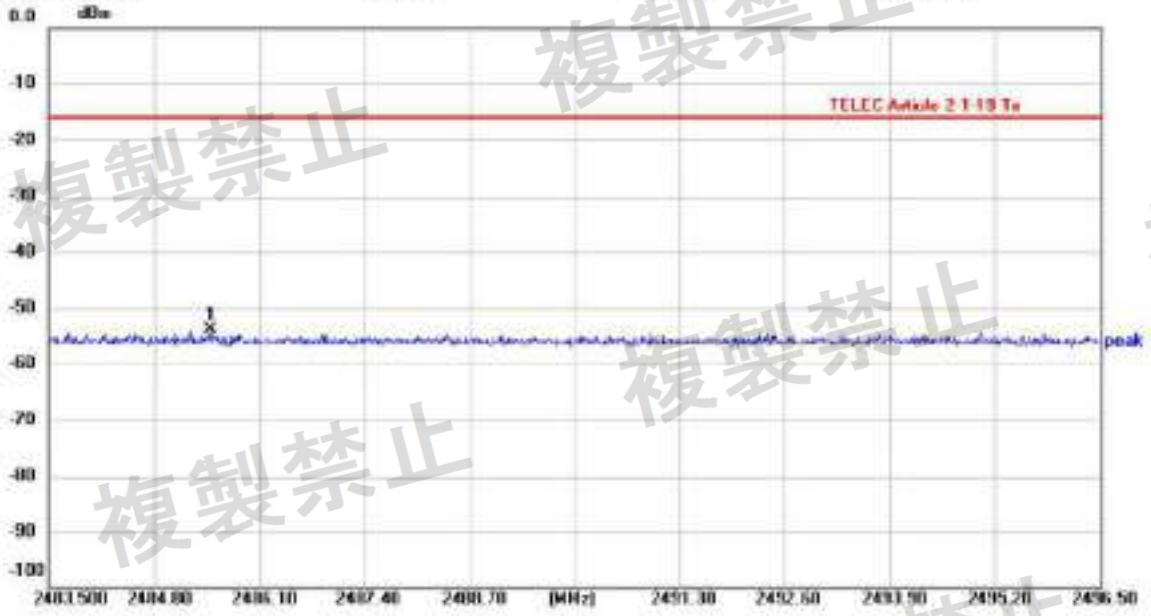


Site: Chamber 04
Limit: TELEC Article 2-1-19 Tx
EUT: W6M22508-24659
M/N:
Mode: Tx BLE 2M CH00
Note:

Polarization:
Power: 3 Vdc
Distance:

Temperature: 23.8 (°C)
Humidity: 56 %RH

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	2485.502	-84.17	10.36	-53.81	-16.00	-37.81	peak			P	

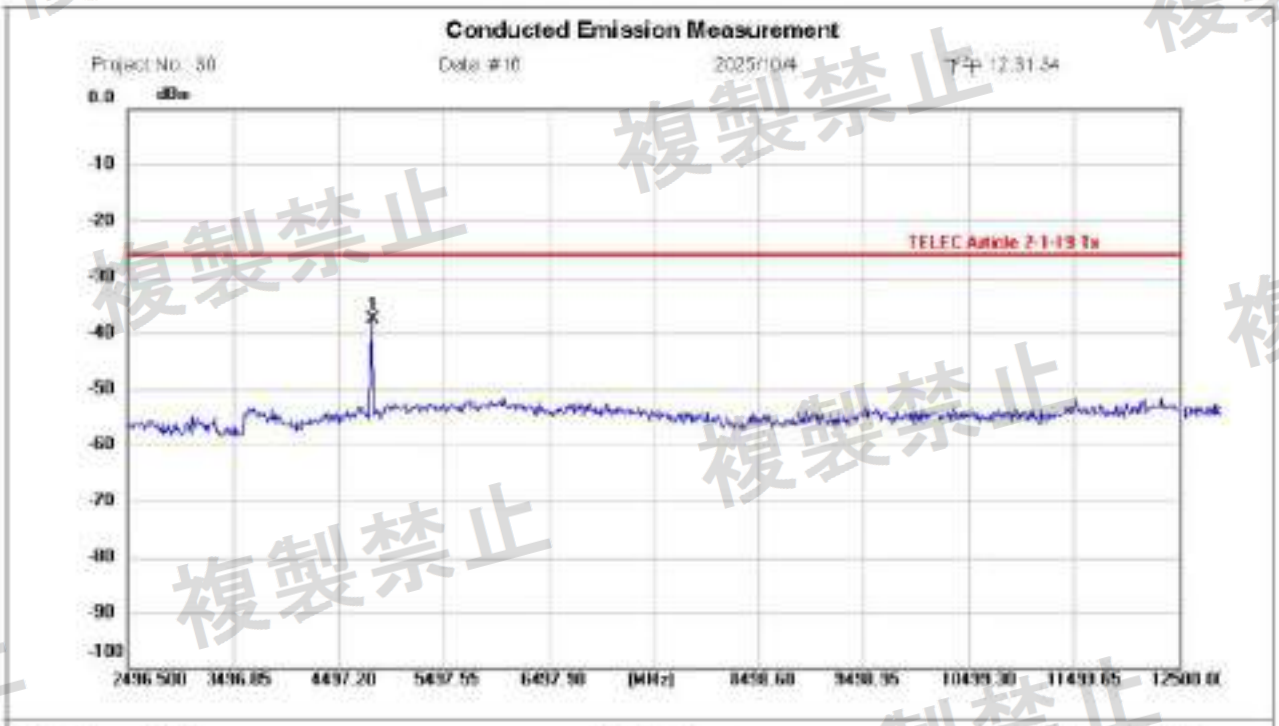


Site: Chamber 04
Limit: TELEC Article 2-1-19 Tx
EUT: W6M22508-24659
M/N:
Mode: Tx BLE 2M CH00
Note:

Polarization:
Power: 3 Vd.c
Distance:

Temperature: 23.8 (°C)
Humidity: 56 %RH

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	4807.309	-48.26	10.60	-37.66	-26.00	-11.66	peak			P	

Conducted Emission Measurement

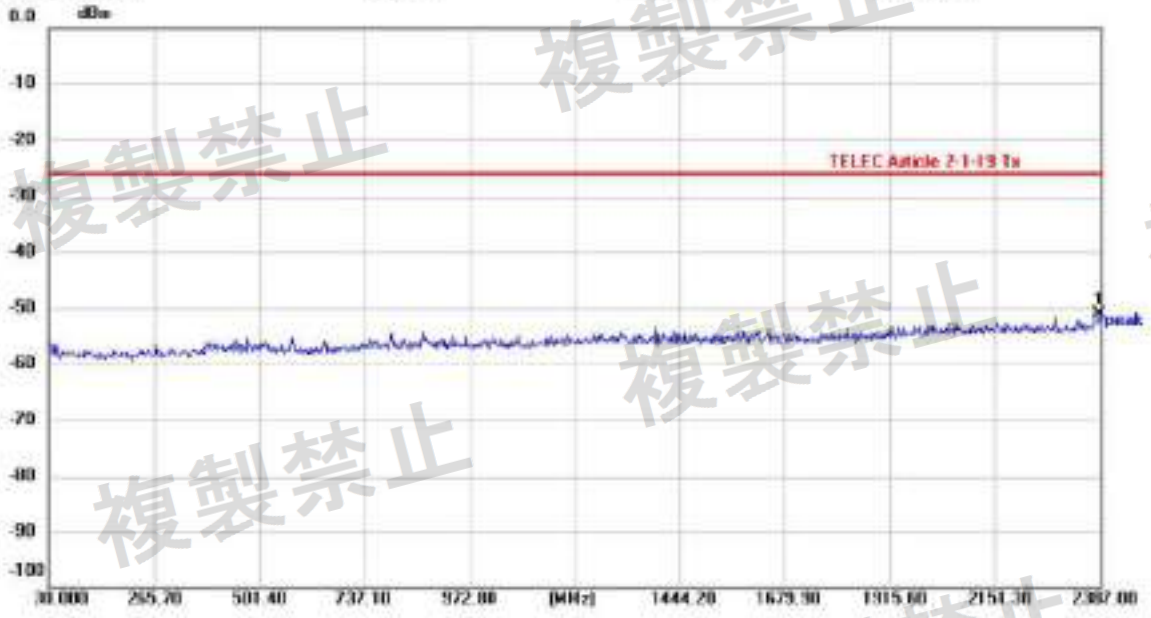


Site: Chamber 04
Limit: TELEC Article 2-1-19 Tx
EUT: W6M22508-24659
M/N:
Mode: Tx BLE 2M CH19
Note:

Polarization:
Power: 3 Vd.c
Distance:

Temperature: 23.8 (°C)
Humidity: 56 %RH

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	2384.643	-81.47	10.36	-51.11	-26.00	-25.11	peak			P	

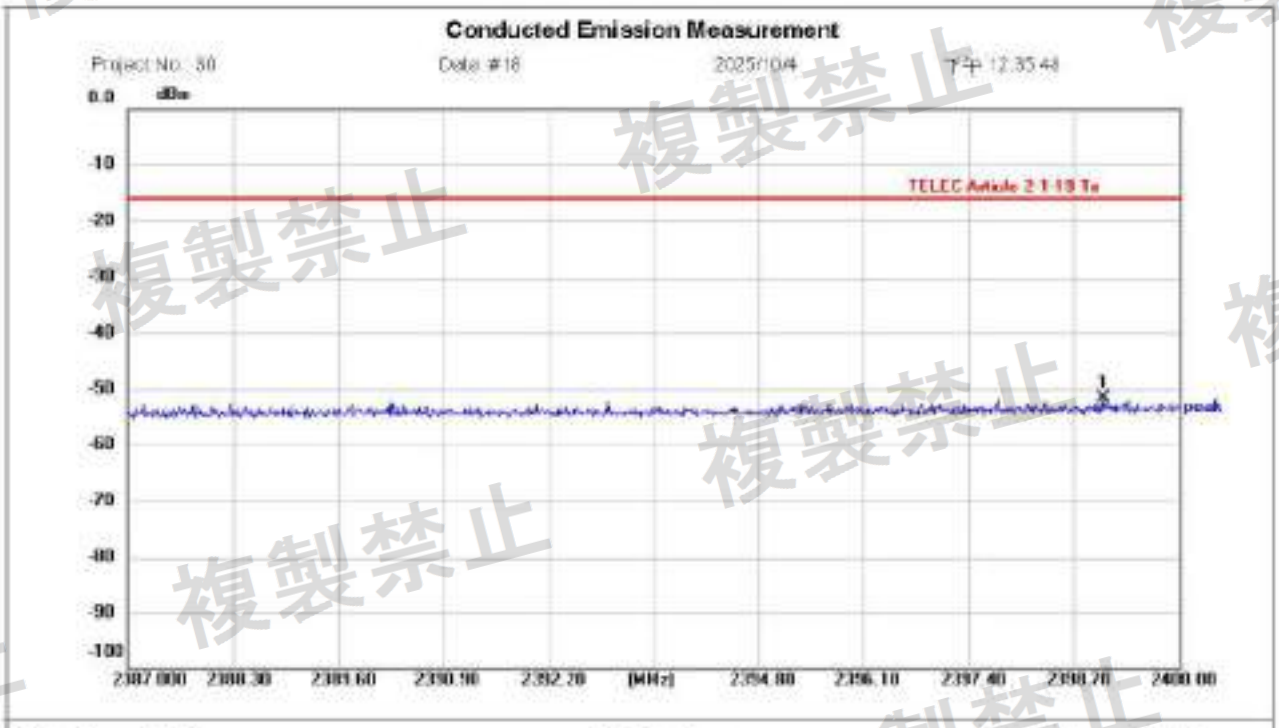


Site: Chamber 04
Limit: TELEC Article 2-1-19 Tx
EUT: W6M22508-24659
M/N:
Mode: Tx BLE 2M CH19
Note:

Polarization:
Power: 3 Vd.c
Distance:

Temperature: 23.8 (°C)
Humidity: 56 %RH

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	2399.077	-82.02	10.36	-51.66	-16.00	-35.66	peak			P	

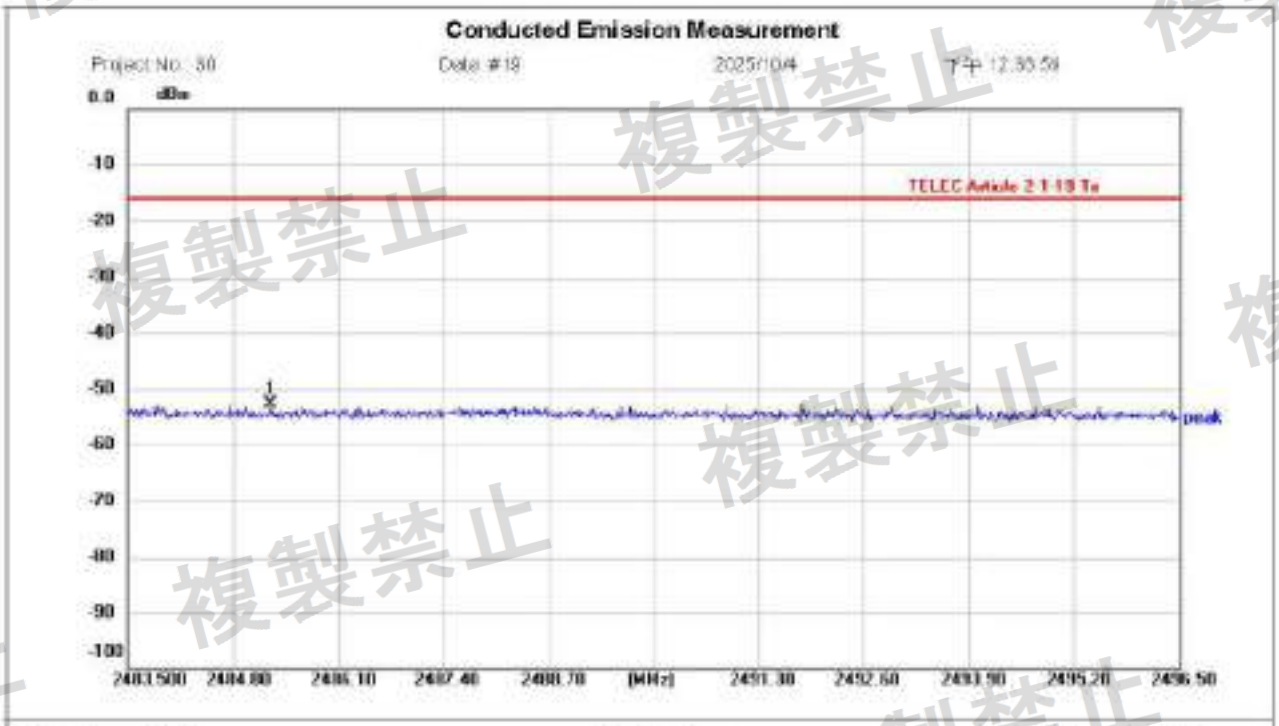


Site: Chamber 04
Limit: TELEC Article 2-1-19 Tx
EUT: W6M22508-24659
M/N:
Mode: Tx BLE 2M CH19
Note:

Polarization:
Power: 3 Vd.c.
Distance:

Temperature: 23.8 (°C)
Humidity: 56 %RH

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	2485.255	-82.92	10.38	-52.56	-16.00	-36.56	peak			P	

Conducted Emission Measurement

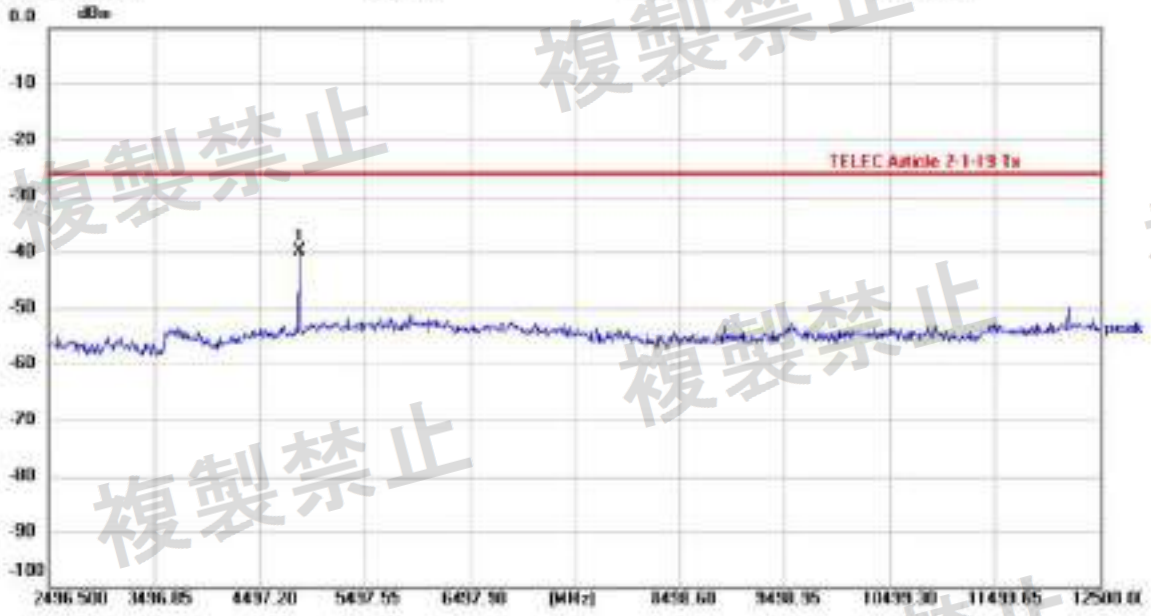


Site: Chamber 04
Limit: TELEC Article 2-1-19 Tx
EUT: W6M22508-24659
M/N:
Mode: Tx BLE 2M CH19
Note:

Polarization:
Power: 3 Vdc
Distance:

Temperature: 23.8 (°C)
Humidity: 56 %RH

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	4877.333	-50.45	10.57	-39.88	-26.00	-13.88	peak			P	

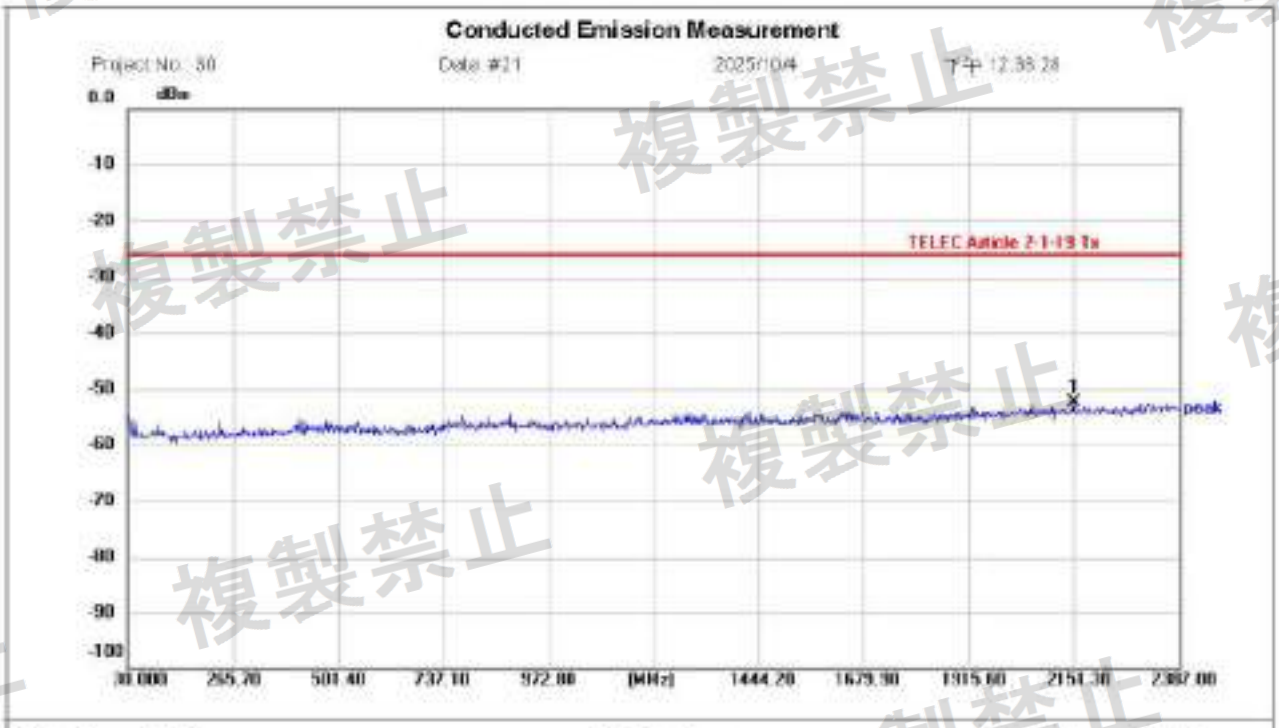


Site: Chamber 04
Limit: TELEC Article 2-1-19 Tx
EUT: W6M22508-24659
M/N:
Mode: Tx BLE 2M CH39
Note:

Polarization:
Power: 3 Vd.c
Distance:

Temperature: 23.8 (°C)
Humidity: 56 %RH

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	2151.300	-82.67	10.34	-52.33	-26.00	-26.33	peak			P	

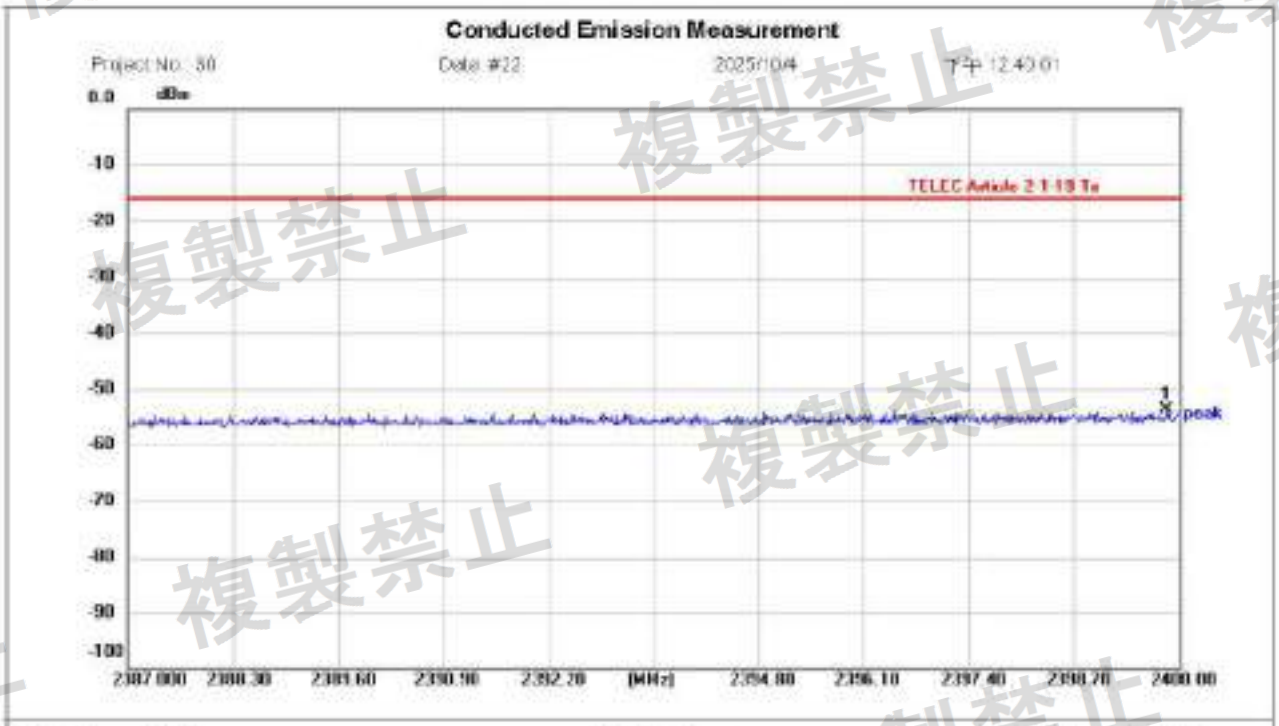


Site: Chamber 04
Limit: TELEC Article 2-1-19 Tx
EUT: W6M22508-24659
M/N:
Mode: Tx BLE 2M CH39
Note:

Polarization:
Power: 3 Vdc
Distance:

Temperature: 23.8 (°C)
Humidity: 56 %RH

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	2399.857	-84.08	10.36	-53.72	-16.00	-37.72	peak			P	

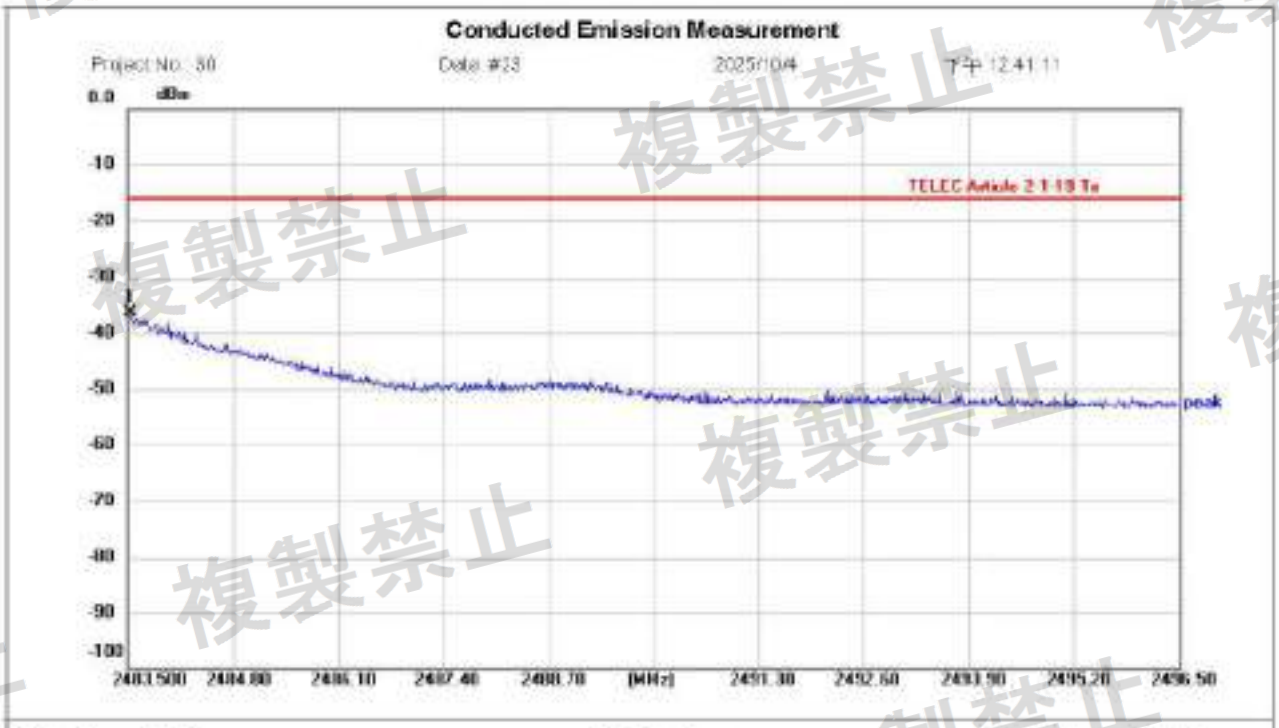


Site: Chamber 04
Limit: TELEC Article 2-1-19 Tx
EUT: W6M22508-24659
M/N:
Mode: Tx BLE 2M CH39
Note:

Polarization:
Power: 3 Vd.c.
Distance:

Temperature: 23.8 (°C)
Humidity: 56 %RH

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	2483.526	-46.74	10.36	-36.38	-16.00	-20.38	peak			P	

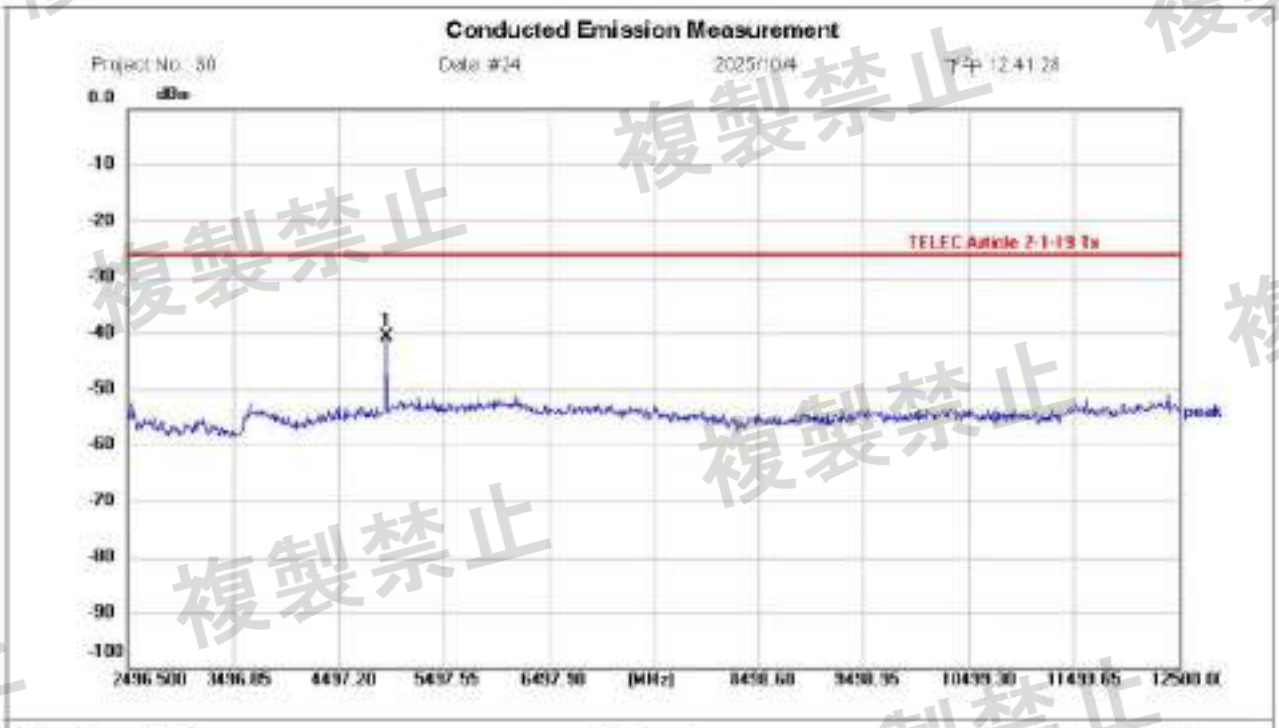


Site: Chamber 04
Limit: TELEC Article 2-1-19 Tx
EUT: W6M22508-24659
M/N:
Mode: Tx BLE 2M CH39
Note:

Polarization:
Power: 3 Vdc
Distance:

Temperature: 23.8 (°C)
Humidity: 56 %RH

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	4957.361	-51.27	10.61	-40.66	-26.00	-14.66	peak			P	

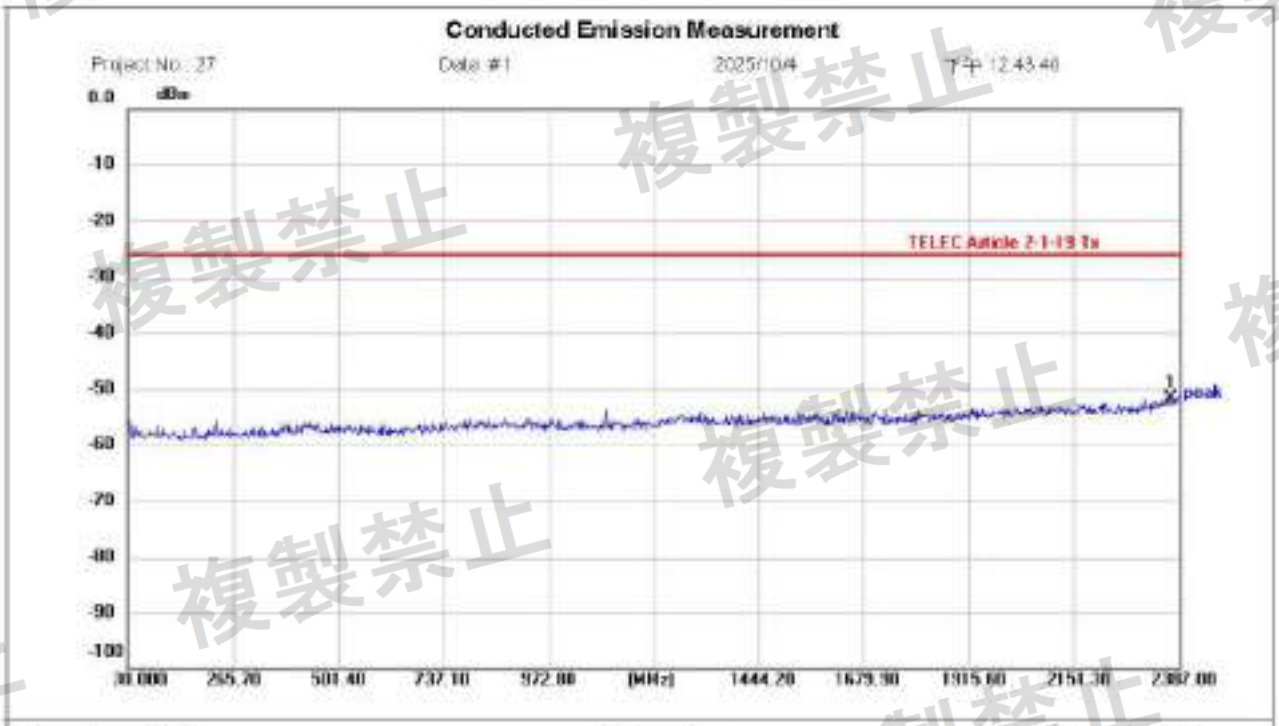


Site: Chamber 04
Limit: TELEC Article 2-1-19 Tx
EUT: W6M22508-24659
M/N:
Mode: Tx BLE 1M CH00
Note:

Polarization:
Power: 2.7 Vdc
Distance:

Temperature: 23.8 (°C)
Humidity: 56 %RH

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	2385.787	-81.90	10.35	-51.55	-26.00	-25.55	peak			P	

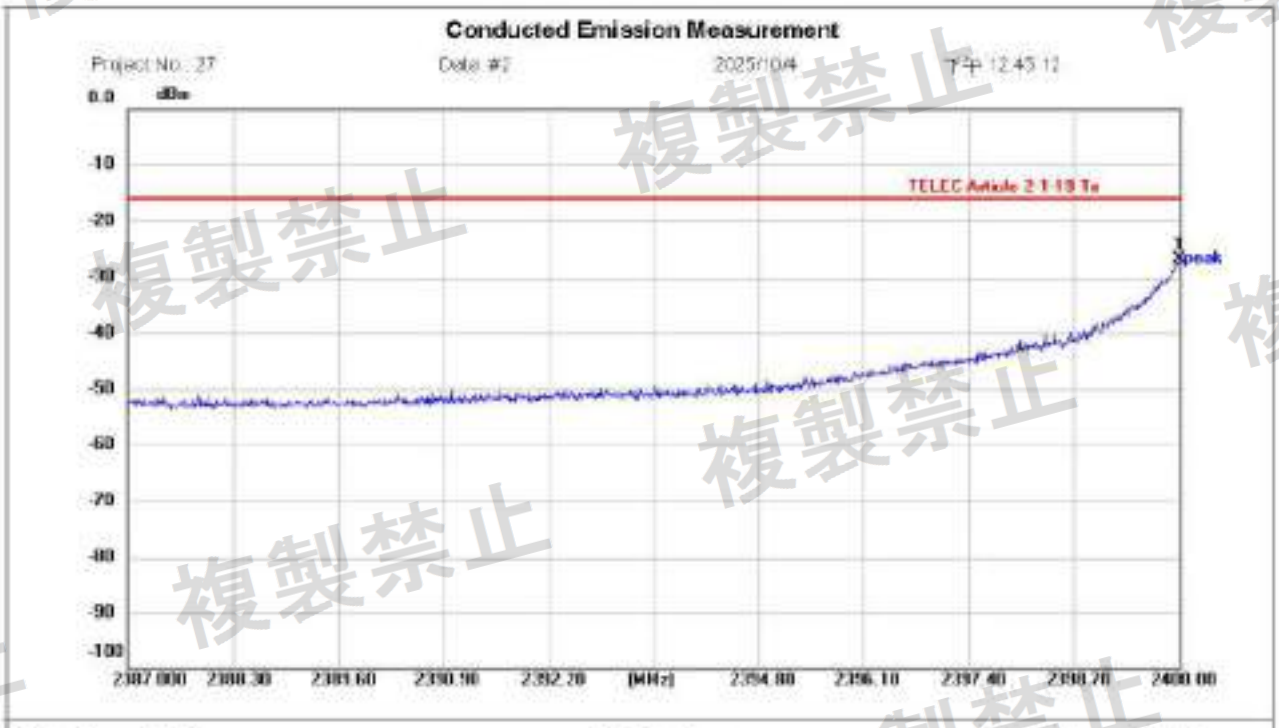


Site: Chamber 04
Limit: TELEC Article 2-1-19 Tx
EUT: W6M22508-24659
M/N:
Mode: Tx BLE 1M CH00
Note:

Polarization:
Power: 2.7 Vdc
Distance:

Temperature: 23.8 (°C)
Humidity: 56 %RH

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	2400.000	-37.24	10.36	-26.88	-16.00	-10.88	peak			P	

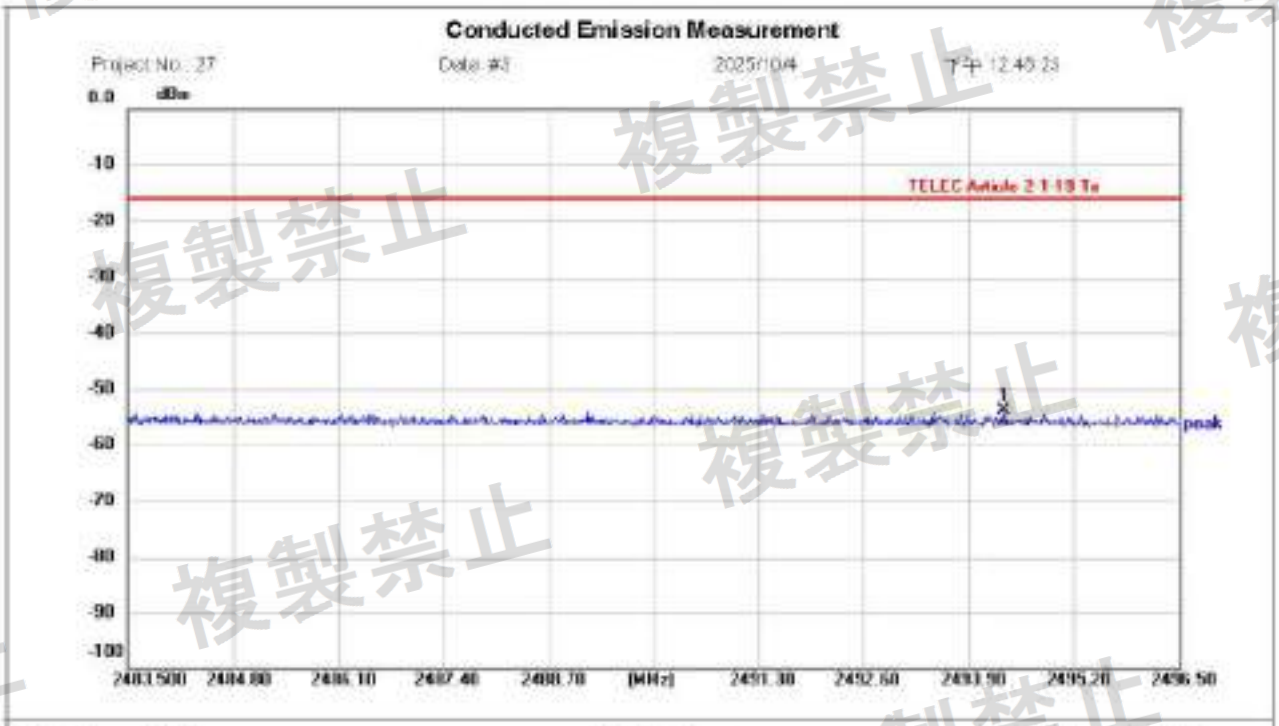


Site: Chamber 04
Limit: TELEC Article 2-1-19 Tx
EUT: W6M22508-24659
M/N:
Mode: Tx BLE 1M CH00
Note:

Polarization:
Power: 2.7 Vdc
Distance:

Temperature: 23.8 (°C)
Humidity: 56 %RH

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	2494.342	-64.34	10.36	-53.98	-16.00	-37.98	peak			P	

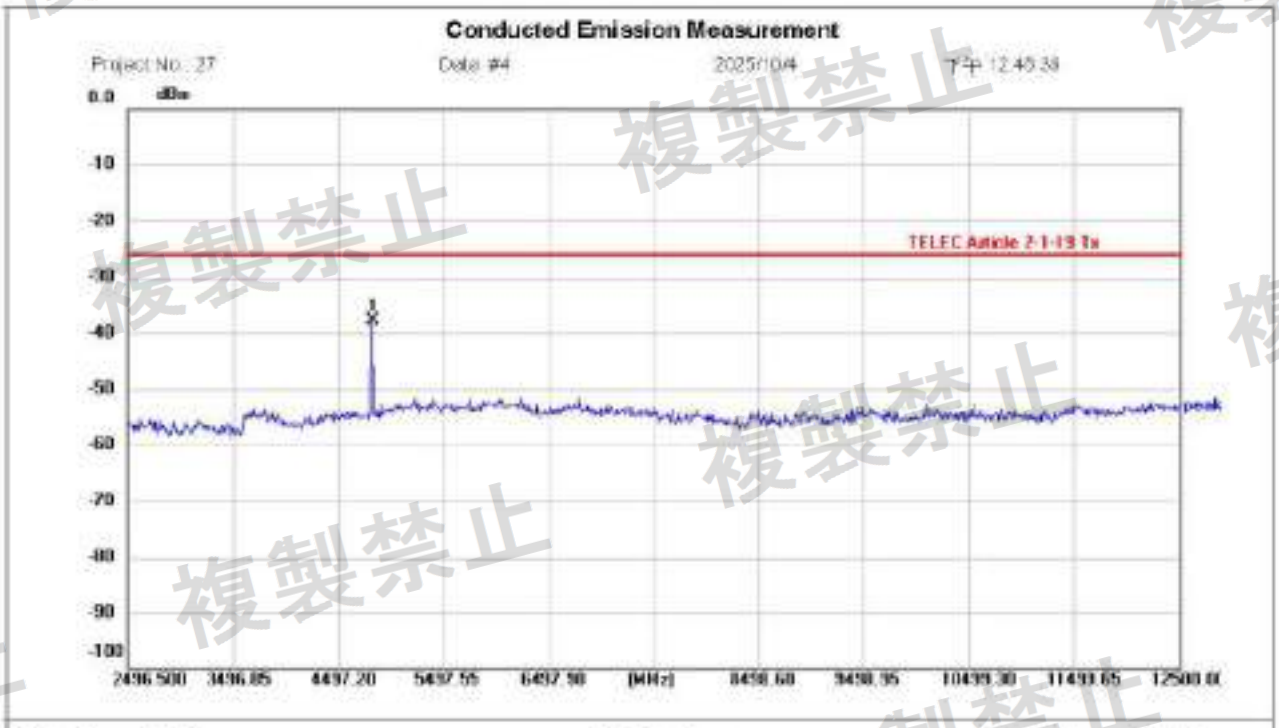


Site: Chamber 04
Limit: TELEC Article 2-1-19 Tx
EUT: W6M22508-24659
M/N:
Mode: Tx BLE 1M CH00
Note:

Polarization:
Power: 2.7 Vdc
Distance:

Temperature: 23.8 (°C)
Humidity: 56 %RH

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	4807.309	-48.38	10.60	-37.78	-26.00	-11.78	peak			P	

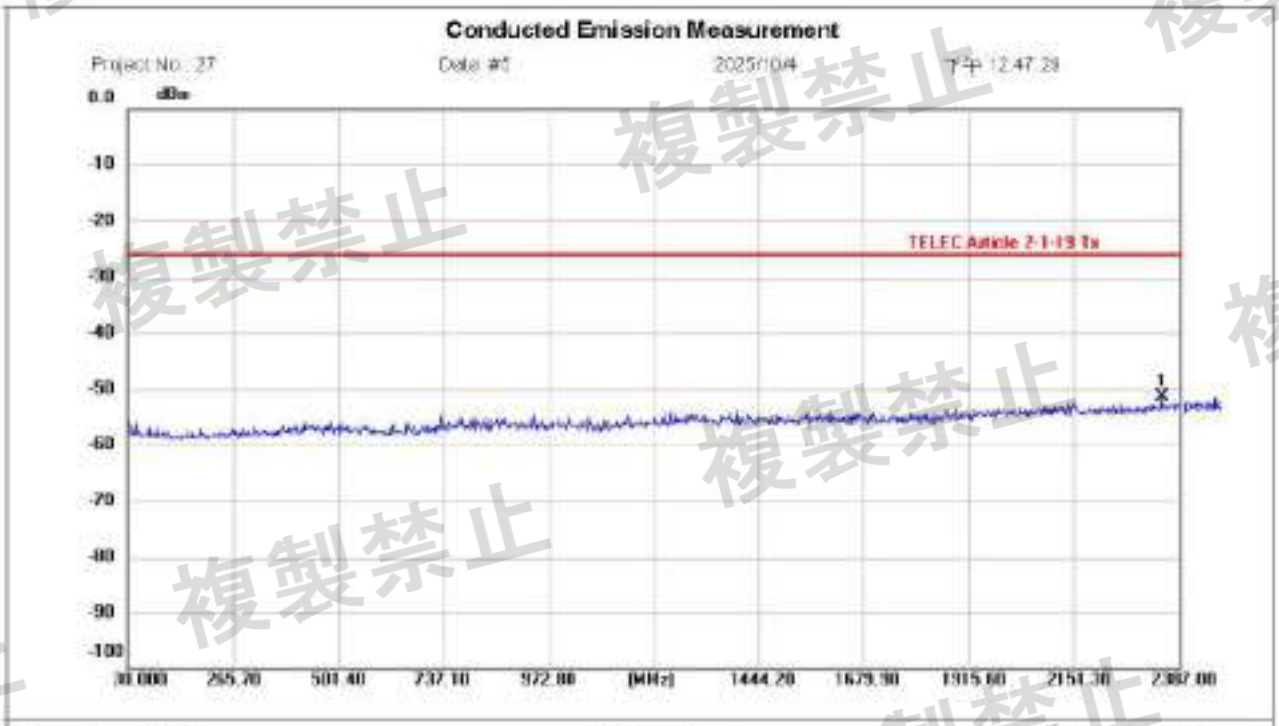


Site: Chamber 04
Limit: TELEC Article 2-1-19 Tx
EUT: W6M22508-24659
M/N:
Mode: Tx BLE 1M CH19
Note:

Polarization:
Power: 2.7 Vdc
Distance:

Temperature: 23.8 (°C)
Humidity: 56 %RH

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	2349.288	-81.81	10.35	-51.46	-26.00	-25.46	peak			P	

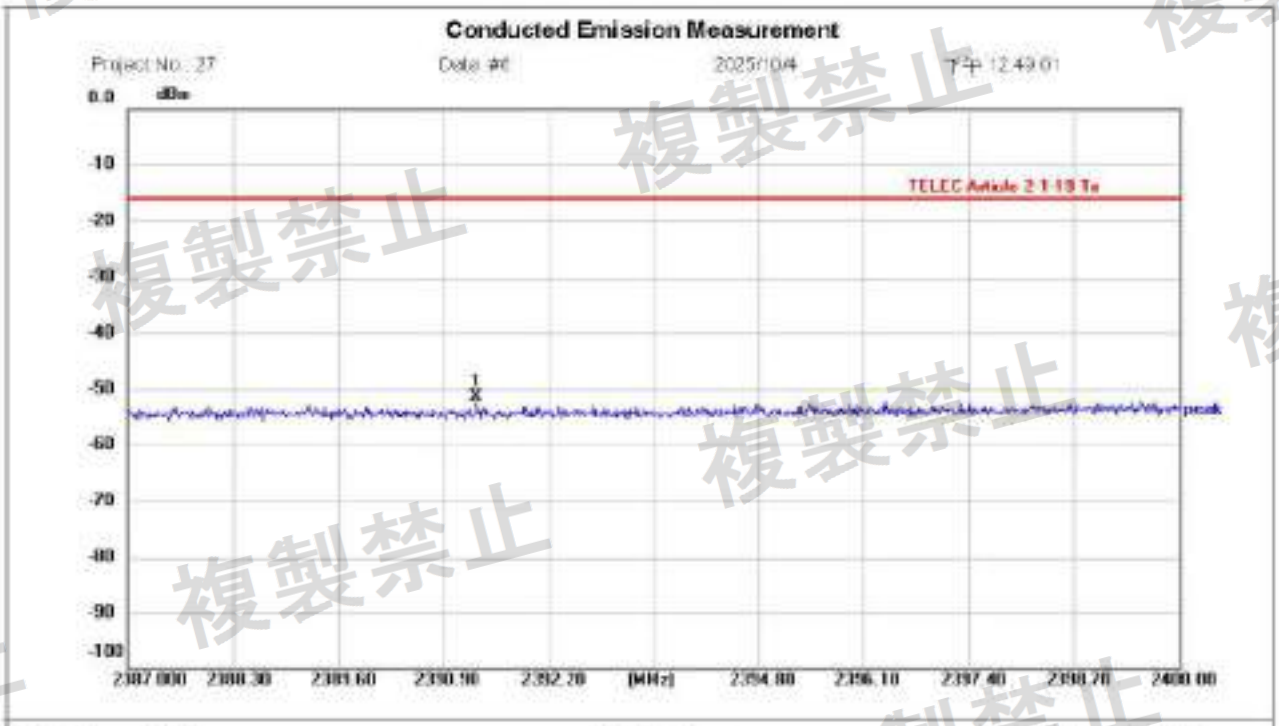


Site: Chamber 04
Limit: TELEC Article 2-1-19 Tx
EUT: W6M22508-24659
M/N:
Mode: Tx BLE 1M CH19
Note:

Polarization:
Power: 2.7 Vdc
Distance:

Temperature: 23.8 (°C)
Humidity: 56 %RH

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	2391.303	-61.74	10.36	-51.38	-16.00	-35.38	peak			P	

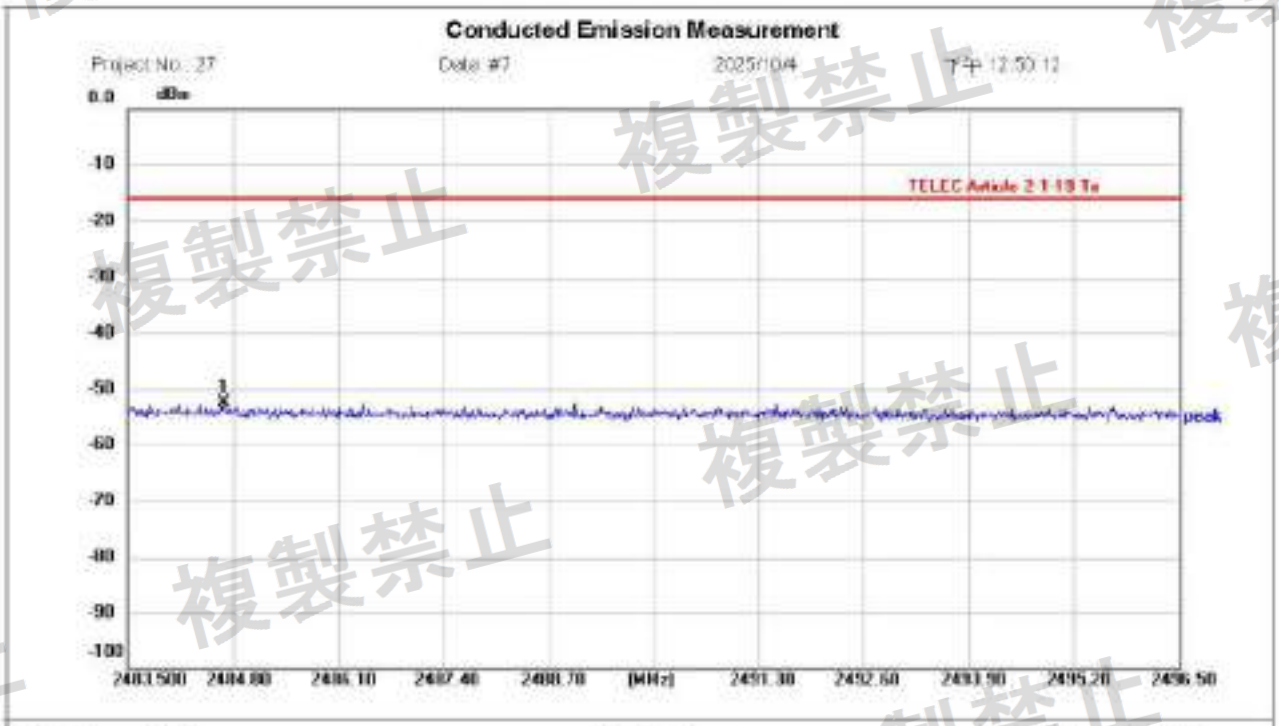


Site: Chamber 04
Limit: TELEC Article 2-1-19 Tx
EUT: W6M22508-24659
M/N:
Mode: Tx BLE 1M CH19
Note:

Polarization:
Power: 2.7 Vdc
Distance:

Temperature: 23.8 (°C)
Humidity: 56 %RH

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	2484.683	-82.81	10.36	-52.45	-16.00	-36.45	peak			P	

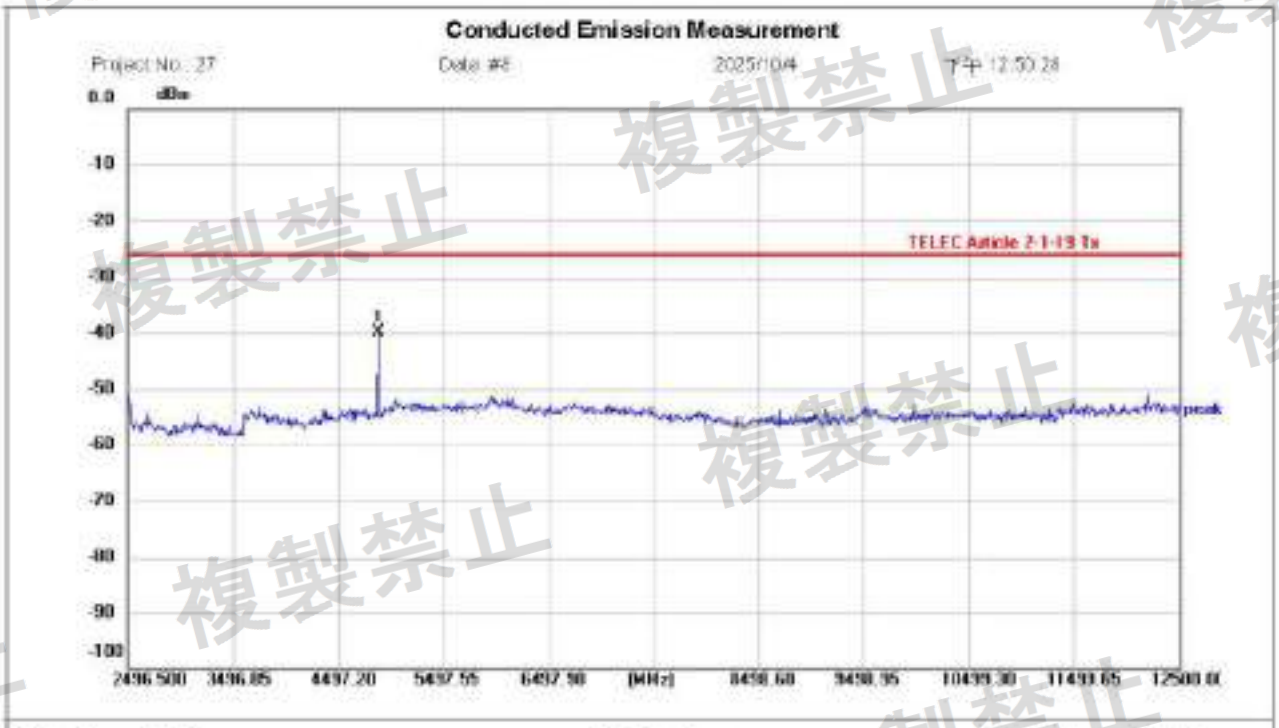


Site: Chamber 04
Limit: TELEC Article 2-1-19 Tx
EUT: W6M22508-24659
M/N:
Mode: Tx BLE 1M CH19
Note:

Polarization:
Power: 2.7 Vdc
Distance:

Temperature: 23.8 (°C)
Humidity: 56 %RH

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	4877.333	-50.42	10.57	-39.85	-26.00	-13.85	peak			P	

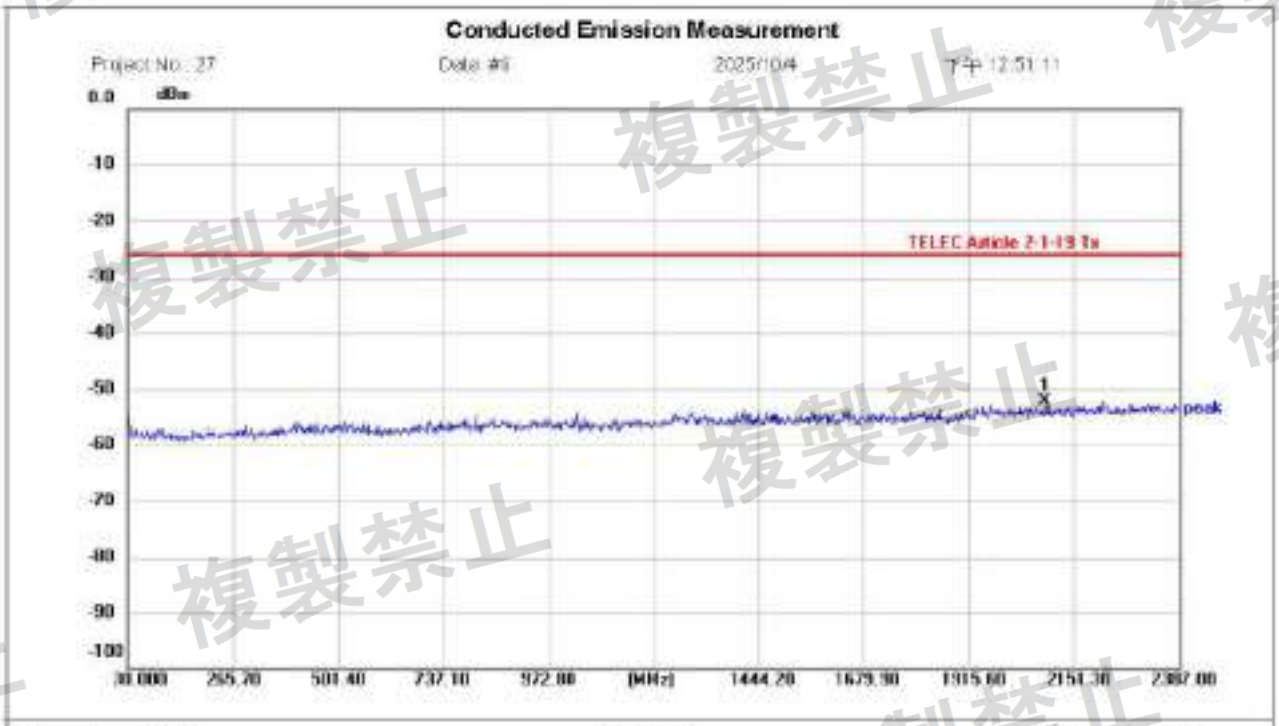


Site: Chamber 04
Limit: TELEC Article 2-1-19 Tx
EUT: W6M22508-24659
M/N:
Mode: Tx BLE 1M CH39
Note:

Polarization:
Power: 2.7 Vdc
Distance:

Temperature: 23.8 (°C)
Humidity: 56 %RH

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	2087.661	-82.48	10.32	-52.16	-26.00	-26.16	peak			P	

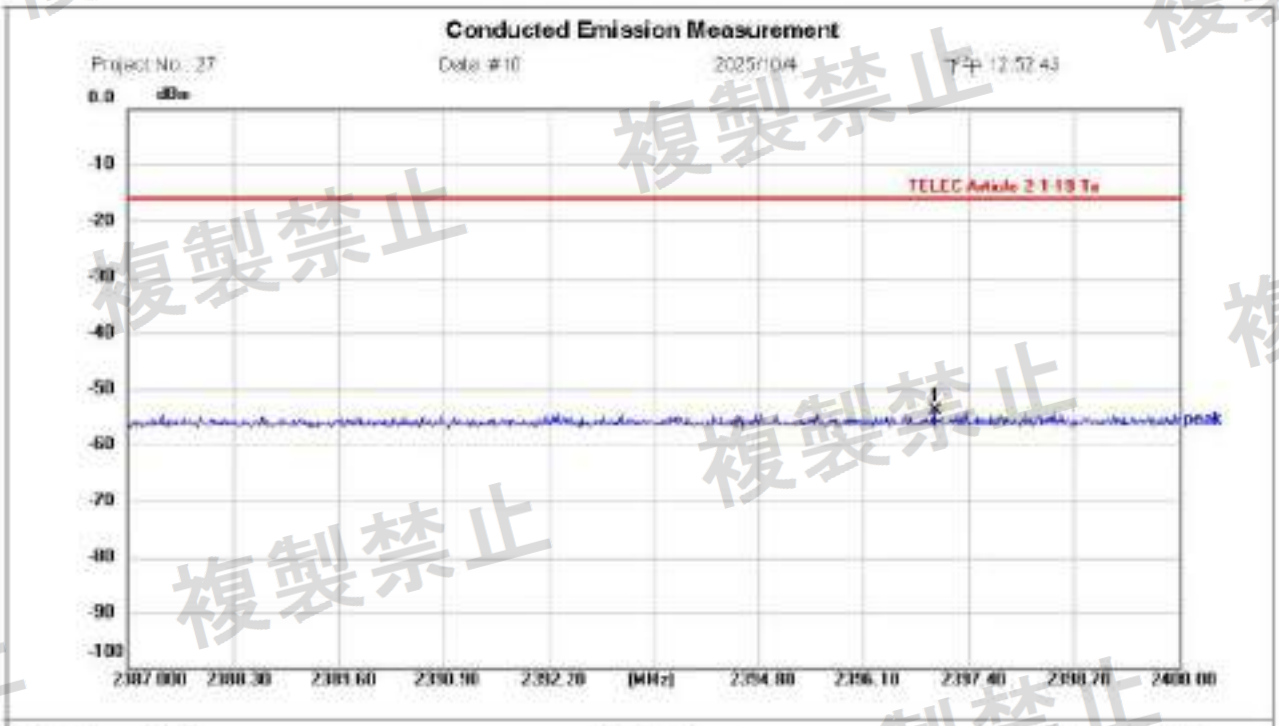


Site: Chamber 04
Limit: TELEC Article 2-1-19 Tx
EUT: W6M22508-24659
M/N:
Mode: Tx BLE 1M CH39
Note:

Polarization:
Power: 2.7 Vdc
Distance:

Temperature: 23.8 (°C)
Humidity: 56 %RH

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	2398.984	-84.15	10.38	-53.79	-16.00	-37.79	peak			P	

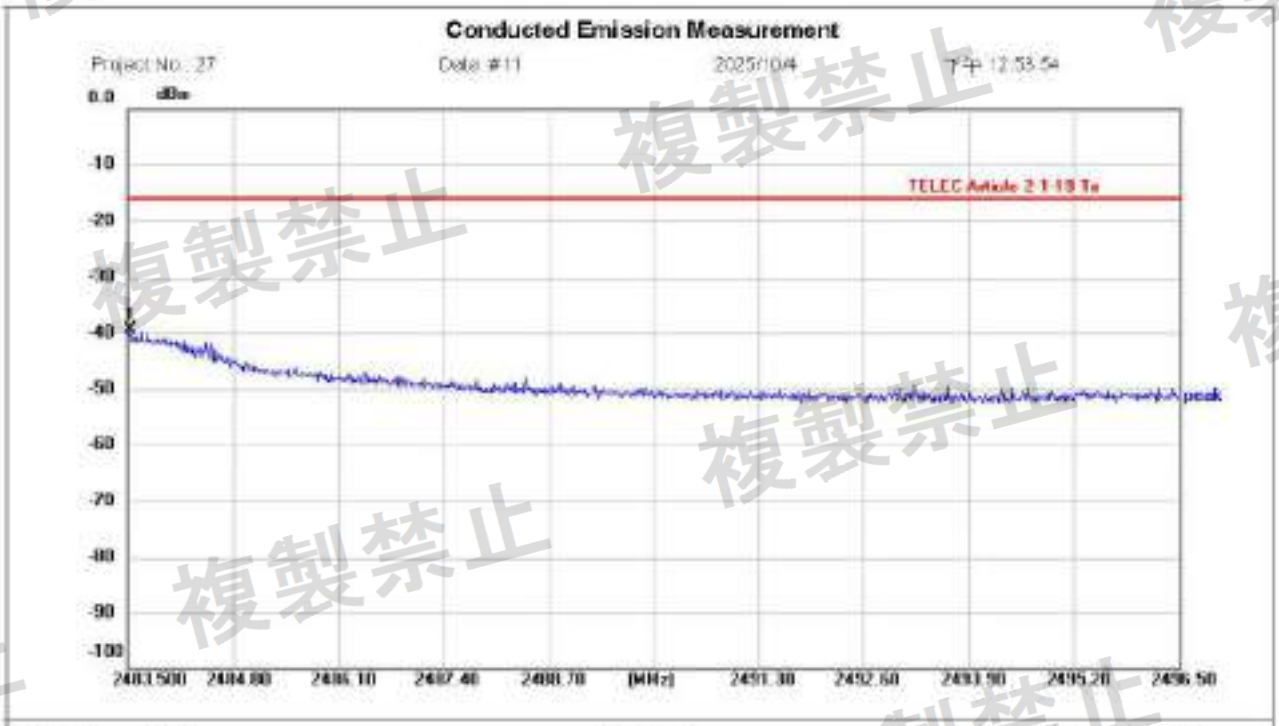


Site: Chamber 04
Limit: TELEC Article 2-1-19 Tx
EUT: W6M22508-24659
M/N:
Mode: Tx BLE 1M CH39
Note:

Polarization:
Power: 2.7 Vdc
Distance:

Temperature: 23.8 (°C)
Humidity: 56 %RH

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	2483.526	-49.63	10.36	-39.27	-16.00	-23.27	peak			P	

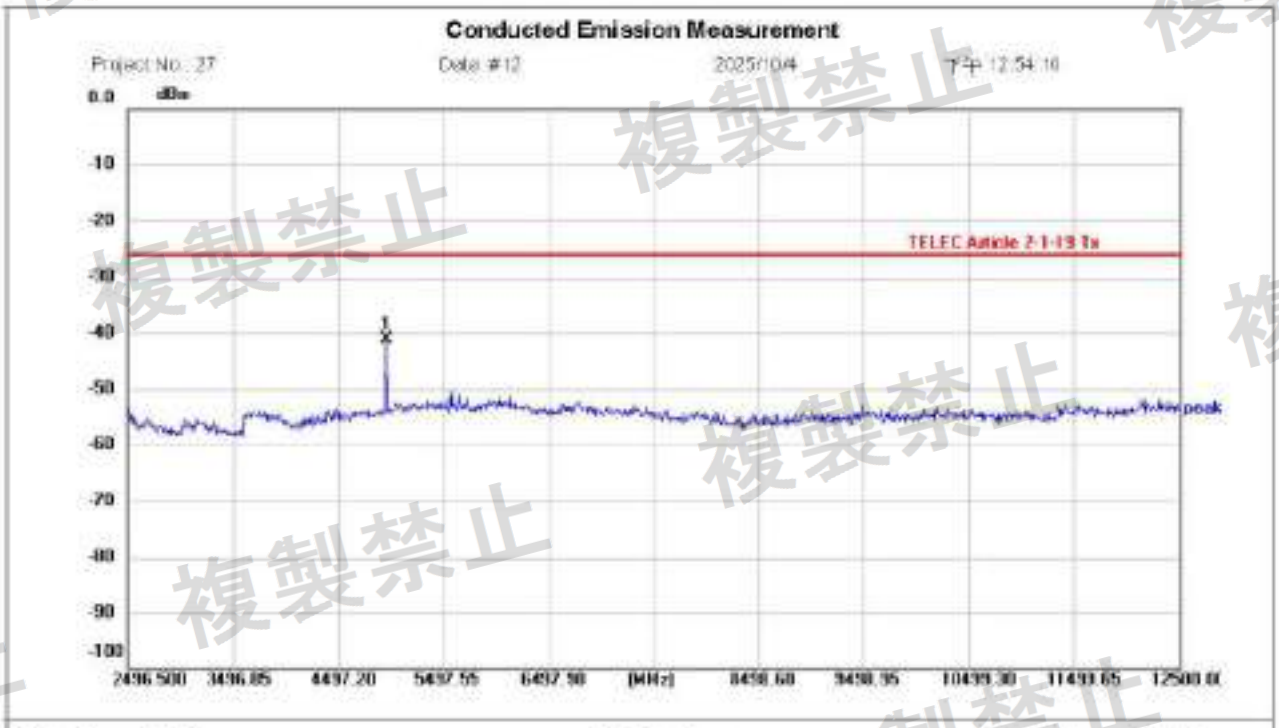


Site: Chamber 04
Limit: TELEC Article 2-1-19 Tx
EUT: W6M22508-24659
M/N:
Mode: Tx BLE 1M CH39
Note:

Polarization:
Power: 2.7 Vdc
Distance:

Temperature: 23.8 (°C)
Humidity: 56 %RH

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	4957.361	-51.73	10.61	-41.12	-26.00	-15.12	peak			P	

Conducted Emission Measurement

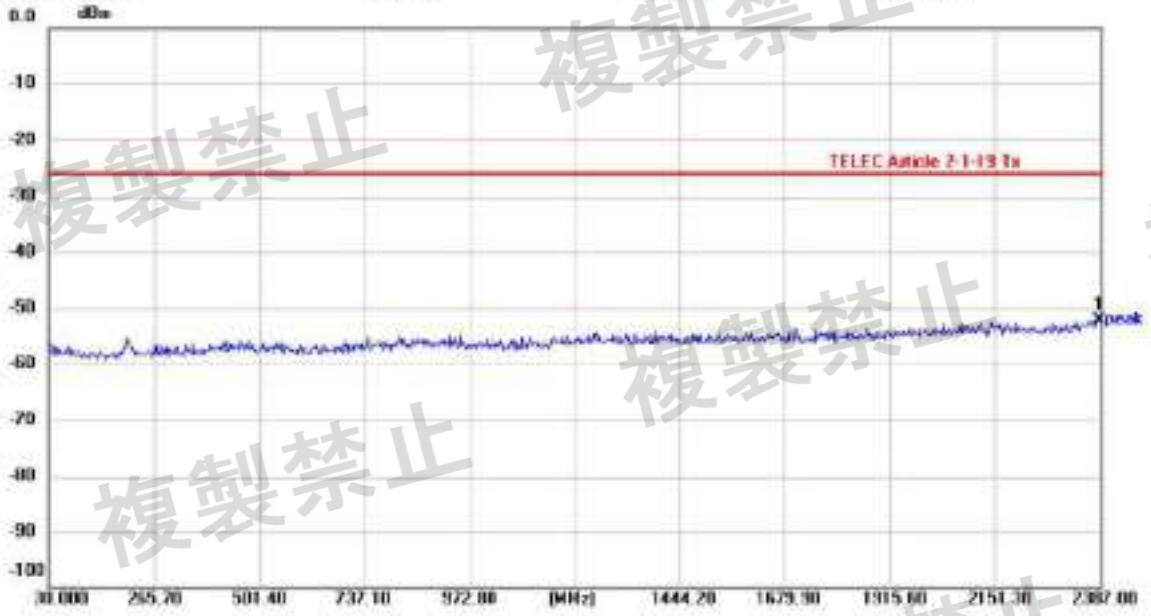


Site: Chamber 04
Limit: TELEC Article 2-1-19 Tx
EUT: W6M22508-24659
M/N:
Mode: Tx BLE 2M CH00
Note:

Polarization:
Power: 2.7 Vdc
Distance:

Temperature: 23.8 (°C)
Humidity: 56 %RH

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	2384.643	-82.36	10.36	-52.00	-26.00	-26.00	peak			P	

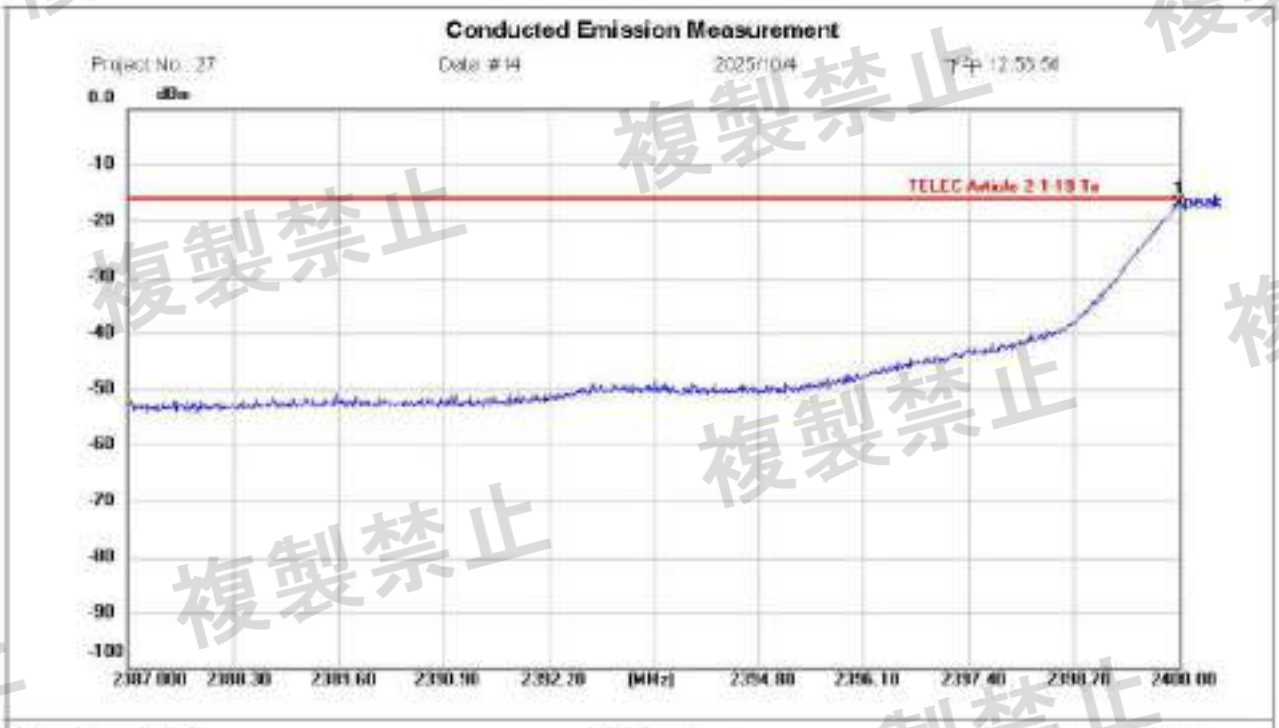


Site: Chamber 04
Limit: TELEC Article 2-1-19 Tx
EUT: W6M22508-24659
M/N:
Mode: Tx BLE 2M CH00
Note:

Polarization:
Power: 2.7 Vdc
Distance:

Temperature: 23.8 (°C)
Humidity: 56 %RH

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	2400.000	-27.20	10.36	-16.84	-16.00	-0.84	peak			P	

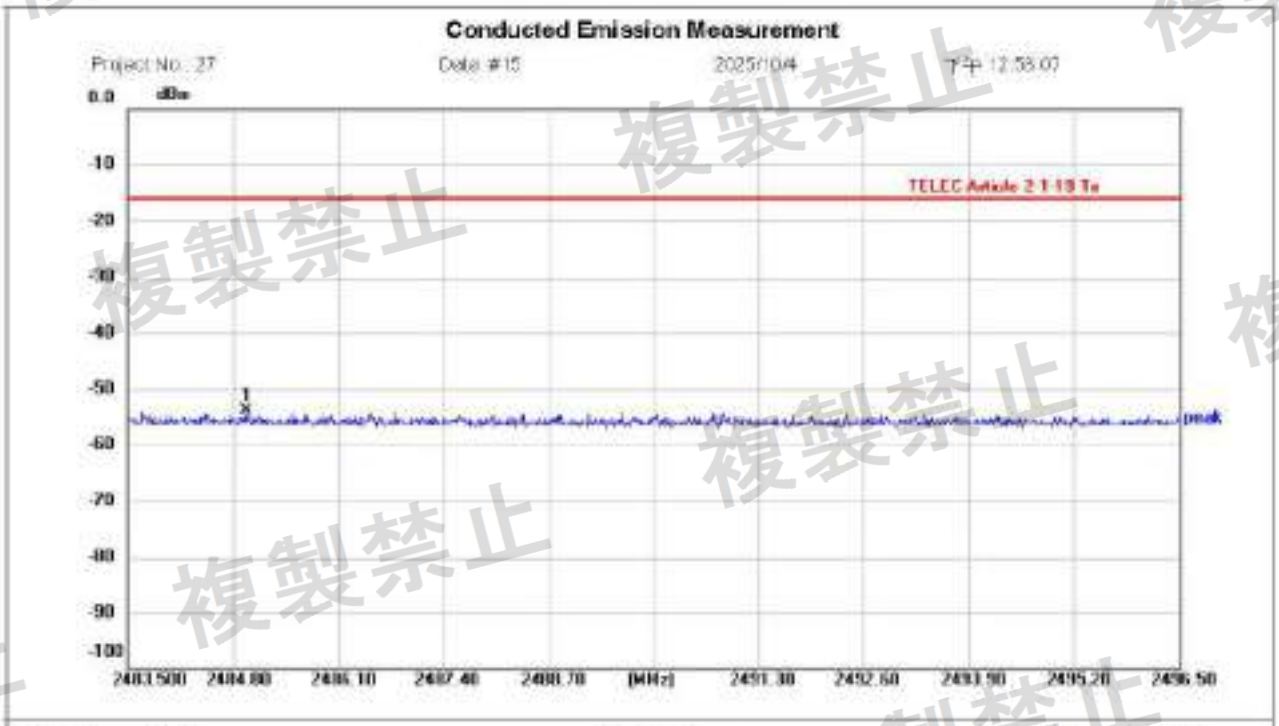


Site: Chamber 04
Limit: TELEC Article 2-1-19 Tx
EUT: W6M22508-24659
M/N:
Mode: Tx BLE 2M CH00
Note:

Polarization:
Power: 2.7 Vdc
Distance:

Temperature: 23.8 (°C)
Humidity: 56 %RH

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	2484.956	-84.30	10.36	-53.94	-16.00	-37.94	peak			P	

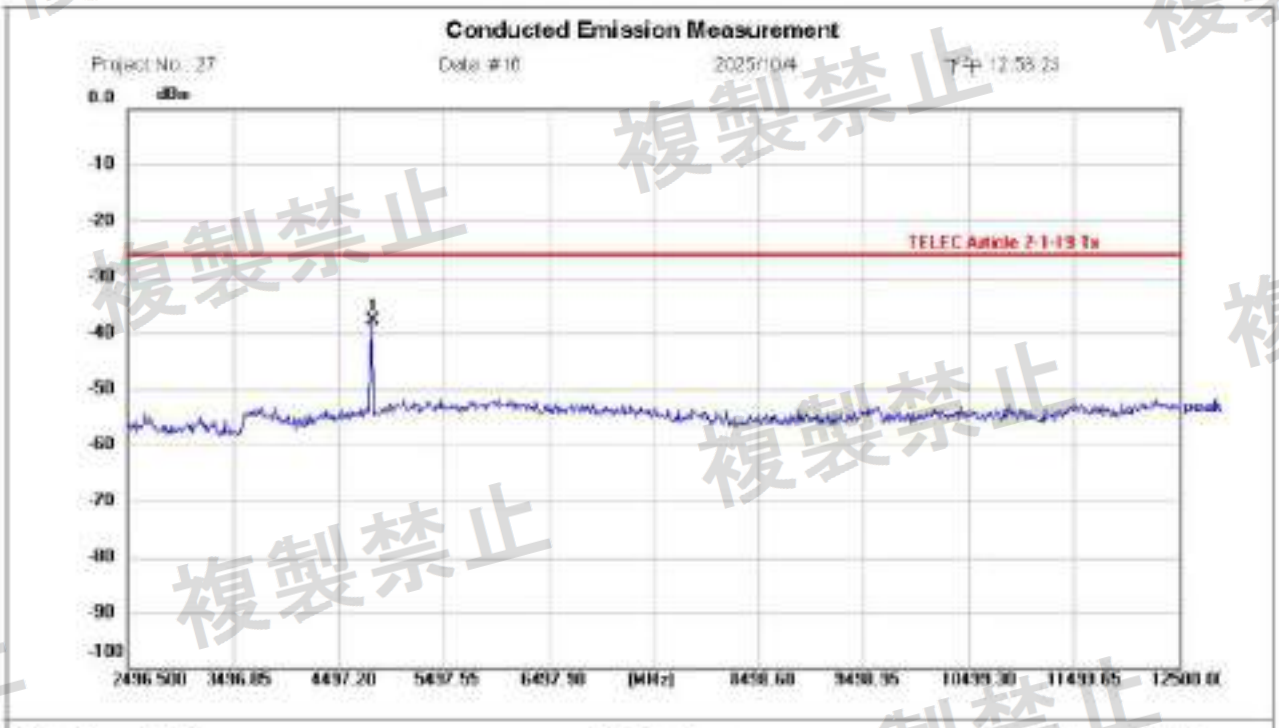


Site: Chamber 04
Limit: TELEC Article 2-1-19 Tx
EUT: W6M22508-24659
M/N:
Mode: Tx BLE 2M CH00
Note:

Polarization:
Power: 2.7 Vdc
Distance:

Temperature: 23.8 (°C)
Humidity: 56 %RH

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	4807.309	-48.42	10.60	-37.82	-26.00	-11.82	peak			P	

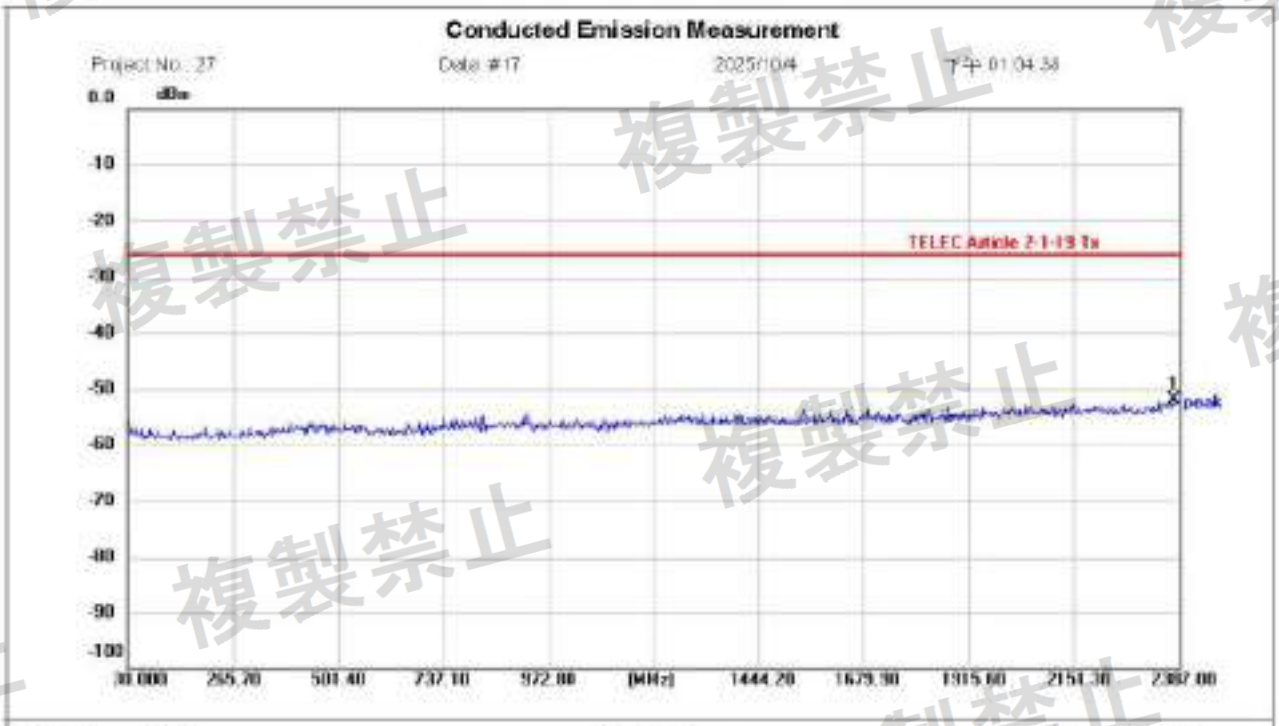


Site: Chamber 04
Limit: TELEC Article 2-1-19 Tx
EUT: W6M22508-24659
M/N:
Mode: Tx BLE 2M CH19
Note:

Polarization:
Power: 2.7 Vdc
Distance:

Temperature: 23.8 (°C)
Humidity: 56 %RH

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	2375.215	-82.28	10.35	-51.93	-26.00	-25.93	peak			P	

Conducted Emission Measurement

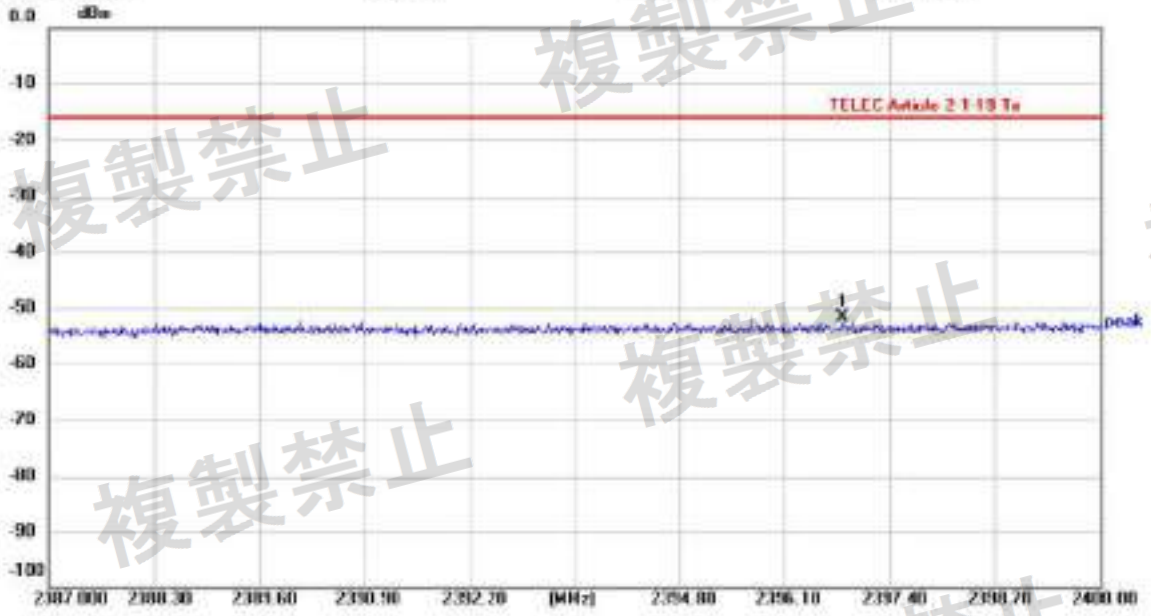


Site: Chamber 04
Limit: TELEC Article 2-1-19 Tx
EUT: W6M22508-24659
M/N:
Mode: Tx BLE 2M CH19
Note:

Polarization:
Power: 2.7 Vdc
Distance:

Temperature: 23.8 (°C)
Humidity: 56 %RH

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	2398.815	-61.98	10.36	-51.62	-16.00	-35.62	peak			P	

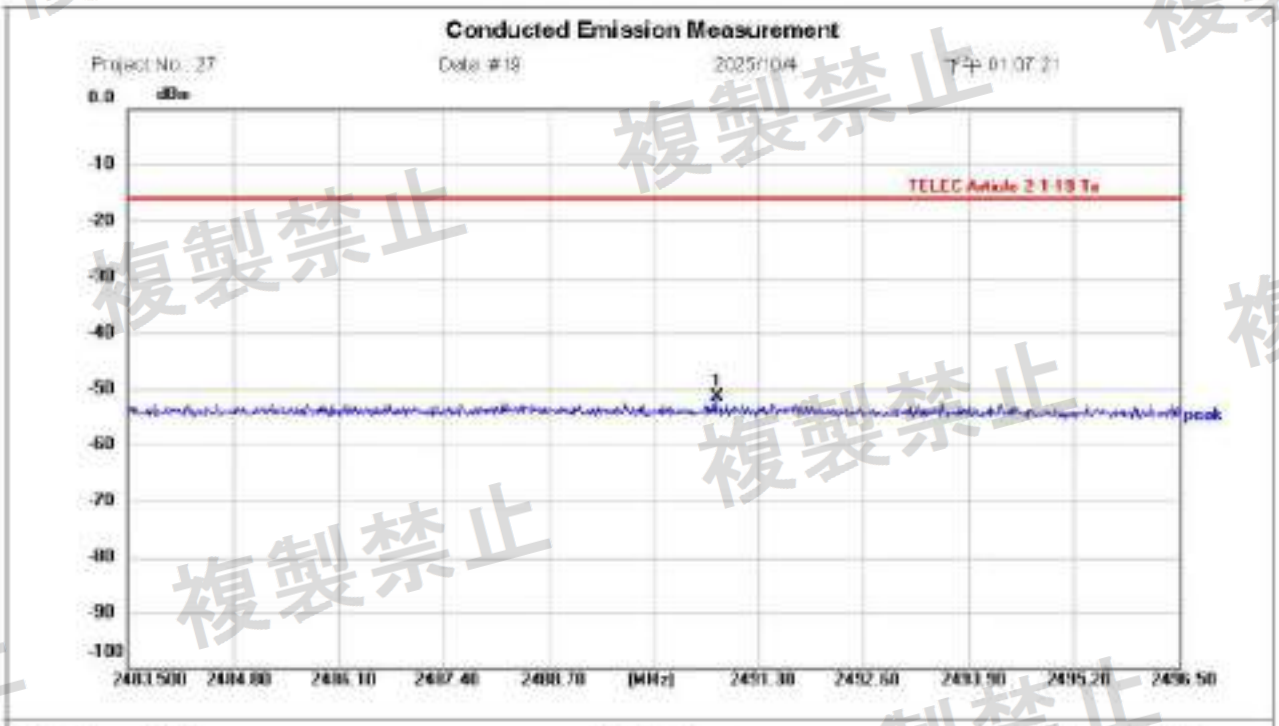


Site: Chamber 04
Limit: TELEC Article 2-1-19 Tx
EUT: W6M22508-24659
M/N:
Mode: Tx BLE 2M CH19
Note:

Polarization:
Power: 2.7 Vdc
Distance:

Temperature: 23.8 (°C)
Humidity: 56 %RH

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	2490.780	-61.66	10.36	-51.30	-16.00	-35.30	peak			P	

Conducted Emission Measurement

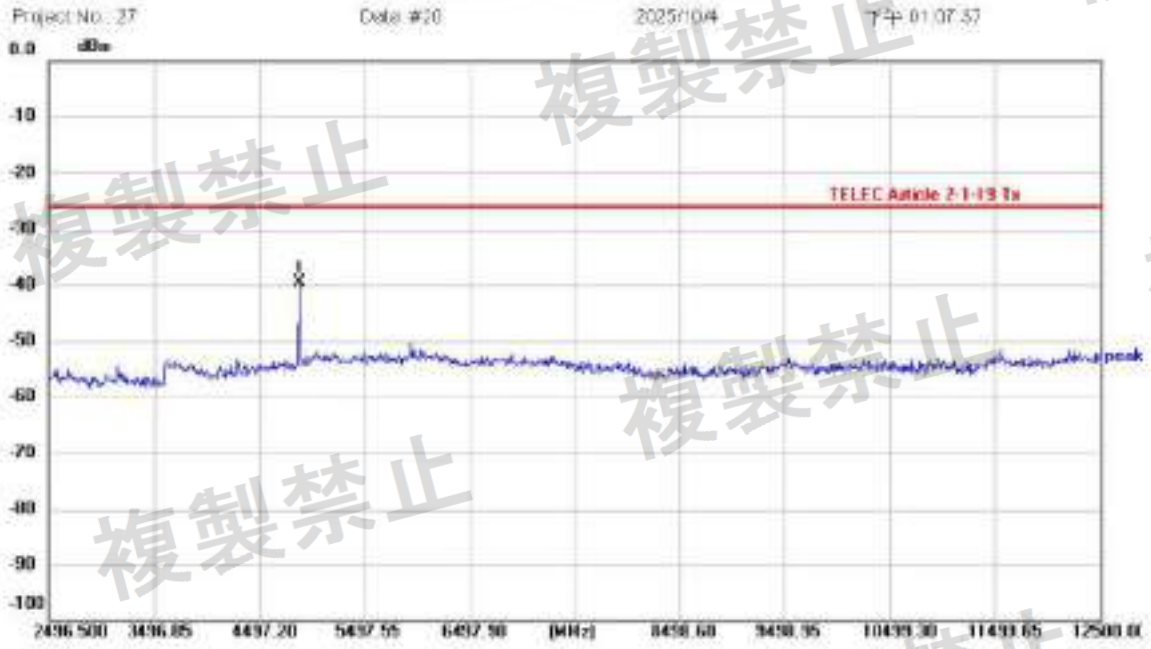


Site: Chamber 04
Limit: TELEC Article 2-1-19 Tx
EUT: W6M22508-24659
M/N:
Mode: Tx BLE 2M CH19
Note:

Polarization:
Power: 2.7 Vdc
Distance:

Temperature: 23.8 (°C)
Humidity: 56 %RH

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	4877.333	-50.22	10.57	-39.65	-26.00	-13.65	peak			P	

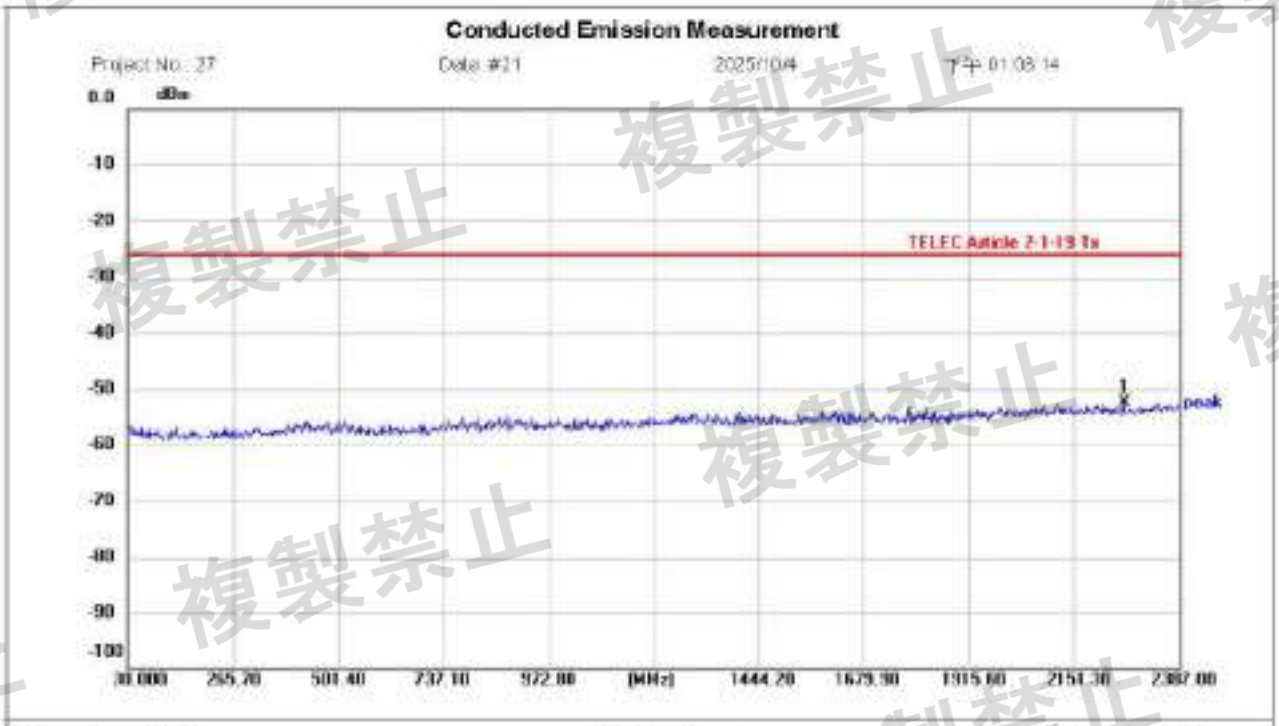


Site: Chamber 04
Limit: TELEC Article 2-1-19 Tx
EUT: W6M22508-24659
M/N:
Mode: Tx BLE 2M CH39
Note:

Polarization:
Power: 2.7 Vdc
Distance:

Temperature: 23.8 (°C)
Humidity: 56 %RH

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	2284.436	-82.77	10.34	-52.43	-26.00	-26.43	peak			P	

Conducted Emission Measurement

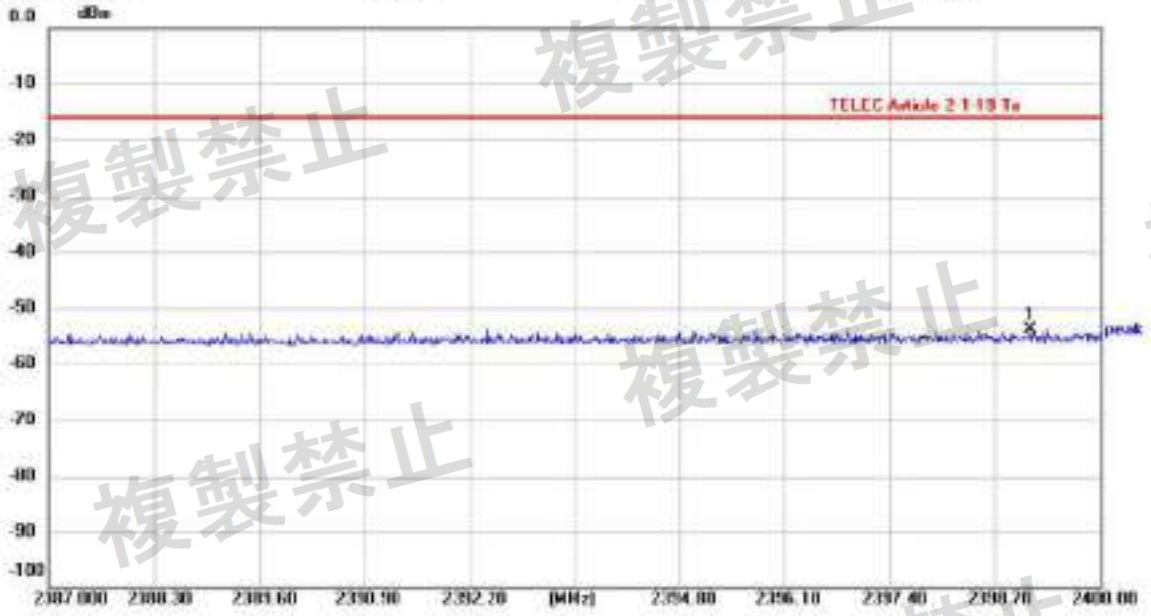


Site: Chamber 04
Limit: TELEC Article 2-1-19 Tx
EUT: W6M22508-24659
M/N:
Mode: Tx BLE 2M CH39
Note:

Polarization:
Power: 2.7 Vdc
Distance:

Temperature: 23.8 (°C)
Humidity: 56 %RH

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	2399.142	-84.12	10.36	-53.76	-16.00	-37.76	peak			P	

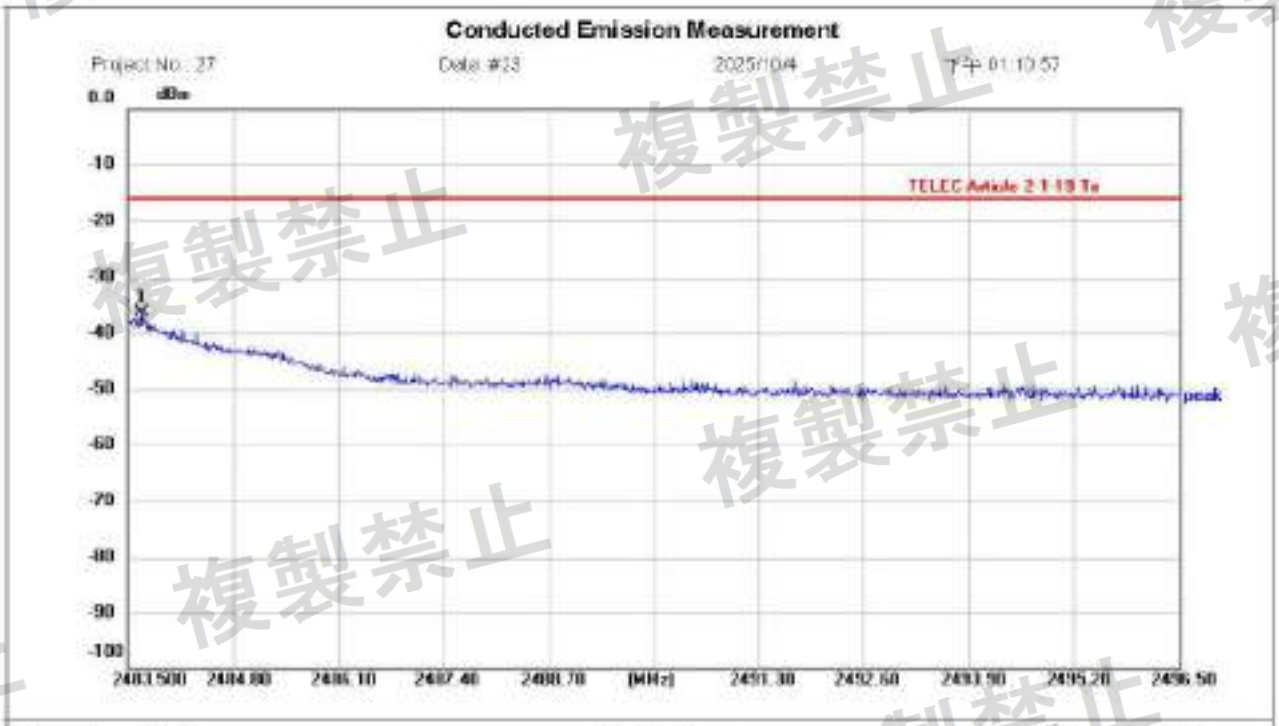


Site: Chamber 04
Limit: TELEC Article 2-1-19 Tx
EUT: W6M22508-24659
M/N:
Mode: Tx BLE 2M CH39
Note:

Polarization:
Power: 2.7 Vdc
Distance:

Temperature: 23.8 (°C)
Humidity: 56 %RH

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	2483.689	-46.73	10.36	-36.37	-16.00	-20.37	peak			P	

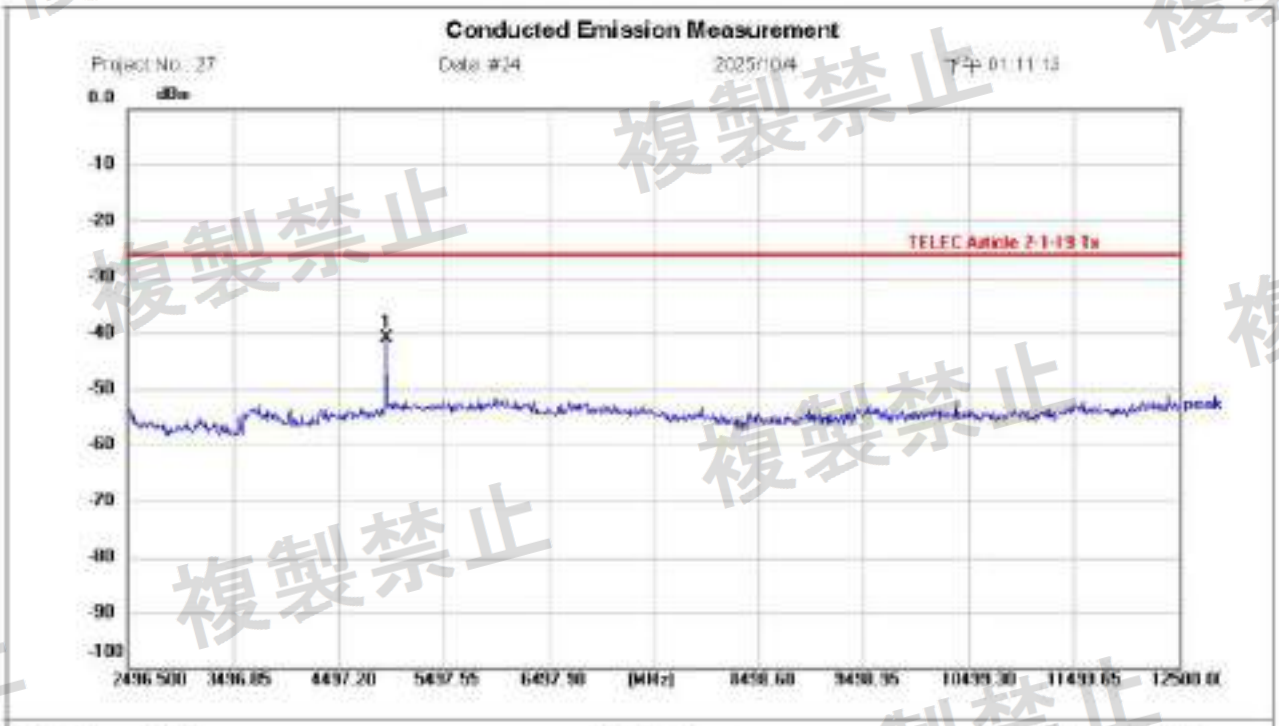


Site: Chamber 04
Limit: TELEC Article 2-1-19 Tx
EUT: W6M22508-24659
M/N:
Mode: Tx BLE 2M CH39
Note:

Polarization:
Power: 2.7 Vdc
Distance:

Temperature: 23.8 (°C)
Humidity: 56 %RH

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	4957.361	-51.44	10.61	-40.83	-26.00	-14.83	peak			P	

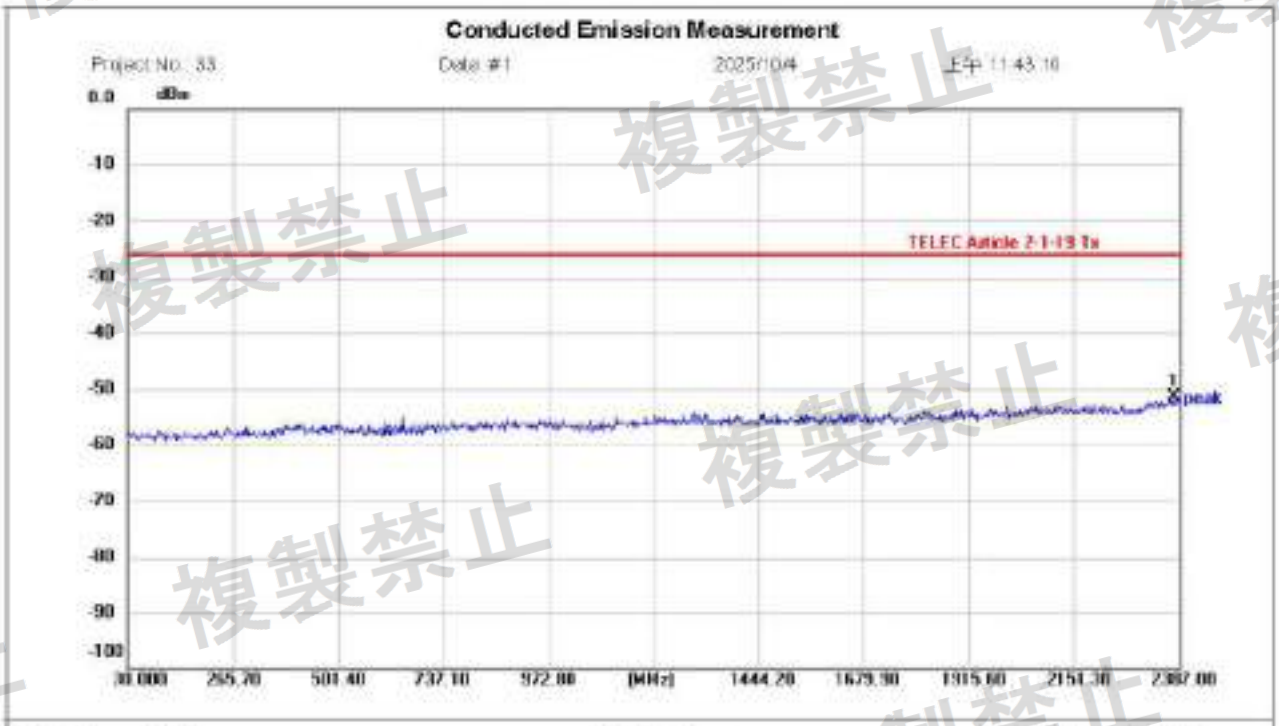


Site: Chamber 04
Limit: TELEC Article 2-1-19 Tx
EUT: W6M22508-24659
M/N:
Mode: Tx BLE 1M CH00
Note:

Polarization:
Power: 3.3 Vdc
Distance:

Temperature: 23.8 (°C)
Humidity: 56 %RH

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	2375.215	-81.69	10.35	-51.34	-26.00	-25.34	peak			P	

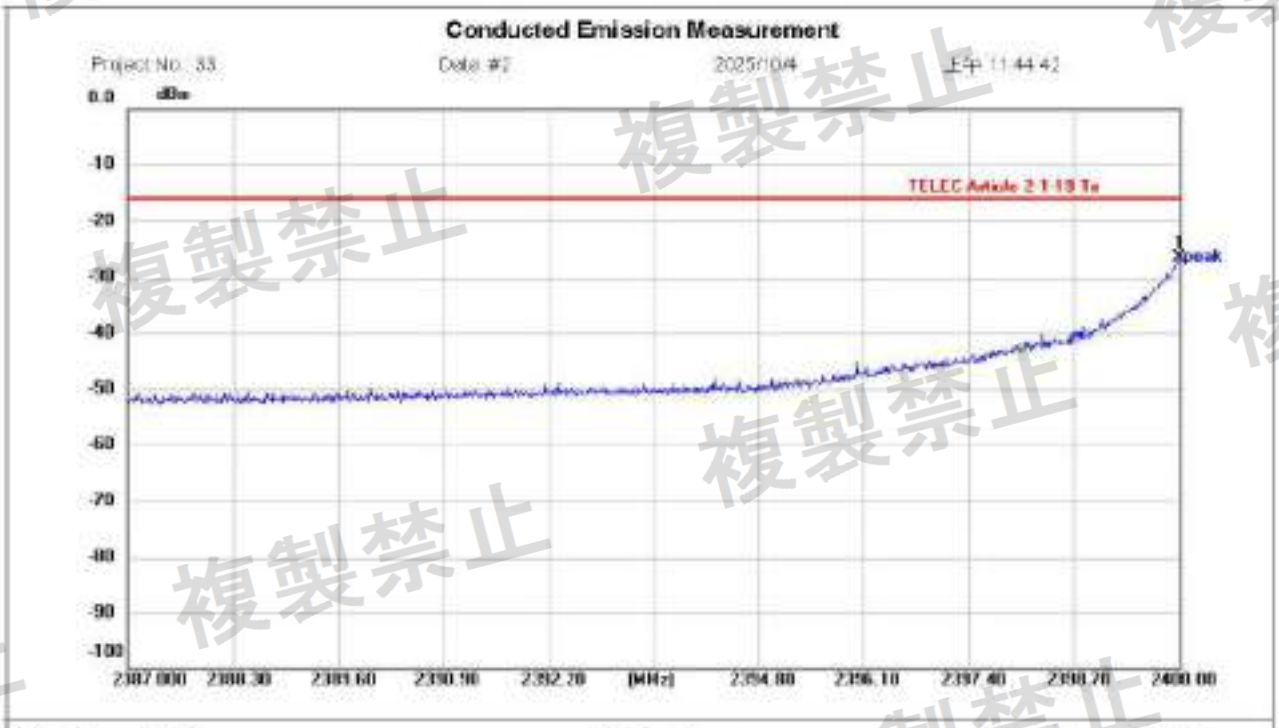


Site: Chamber 04
Limit: TELEC Article 2-1-19 Tx
EUT: W6M22508-24659
M/N:
Mode: Tx BLE 1M CH00
Note:

Polarization:
Power: 3.3 Vdc
Distance:

Temperature: 23.8 (°C)
Humidity: 56 %RH

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	2400.000	-37.05	10.36	-26.69	-16.00	-10.69	peak			P	

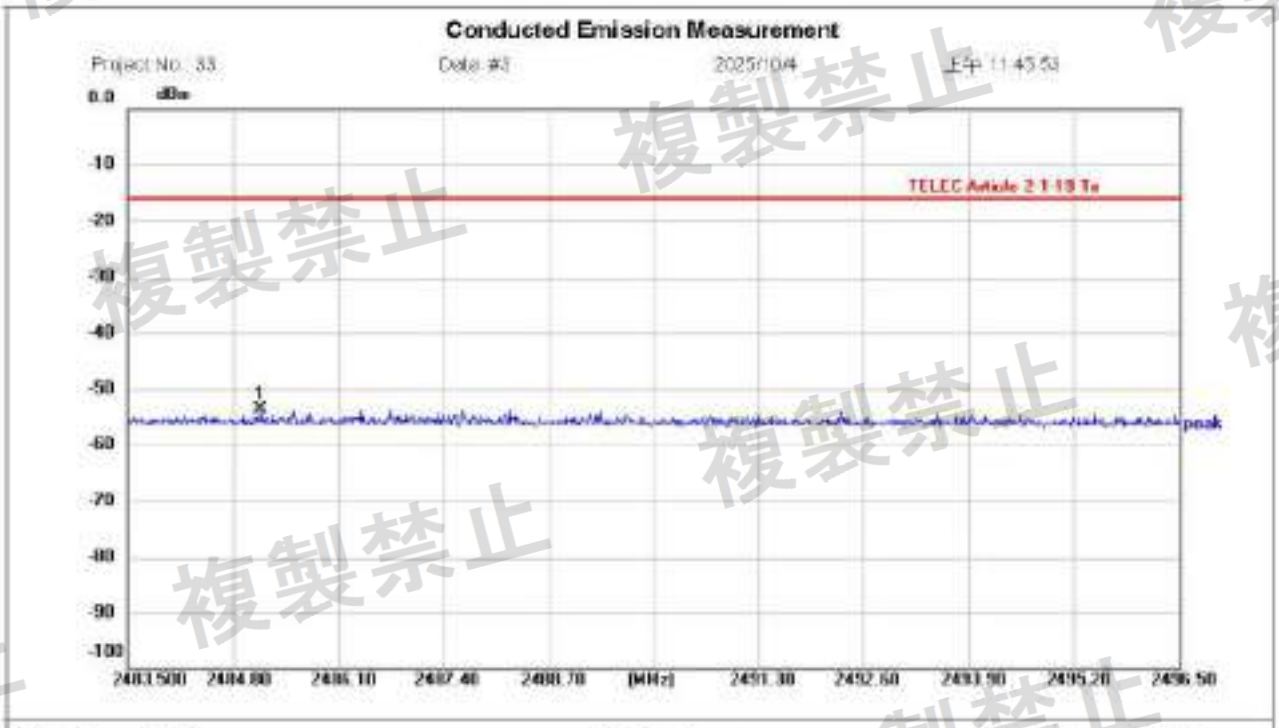


Site: Chamber 04
Limit: TELEC Article 2-1-19 Tx
EUT: W6M22508-24659
M/N:
Mode: Tx BLE 1M CH00
Note:

Polarization:
Power: 3.3 Vdc
Distance:

Temperature: 23.8 (°C)
Humidity: 56 %RH

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	2485.138	-63.89	10.36	-53.53	-16.00	-37.53	peak			P	

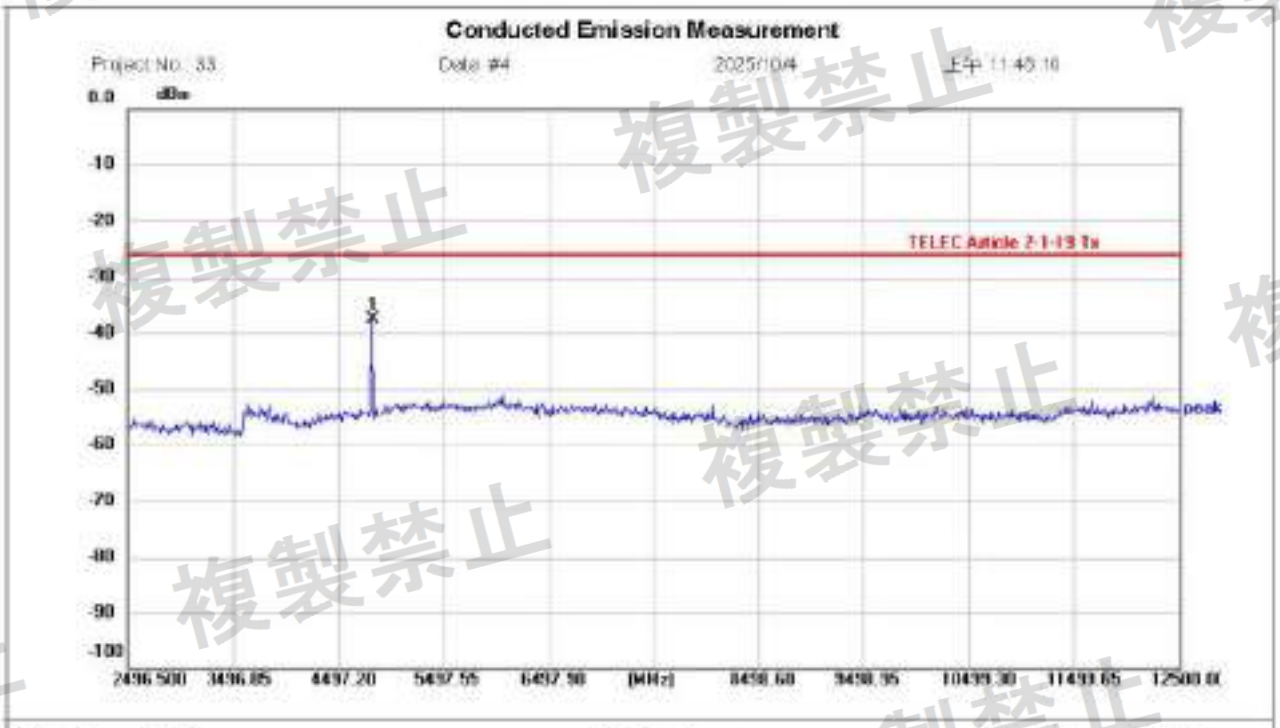


Site: Chamber 04
Limit: TELEC Article 2-1-19 Tx
EUT: W6M22508-24659
M/N:
Mode: Tx BLE 1M CH00
Note:

Polarization:
Power: 3.3 Vdc
Distance:

Temperature: 23.8 (°C)
Humidity: 56 %RH

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	4807.309	-48.26	10.60	-37.66	-26.00	-11.66	peak			P	

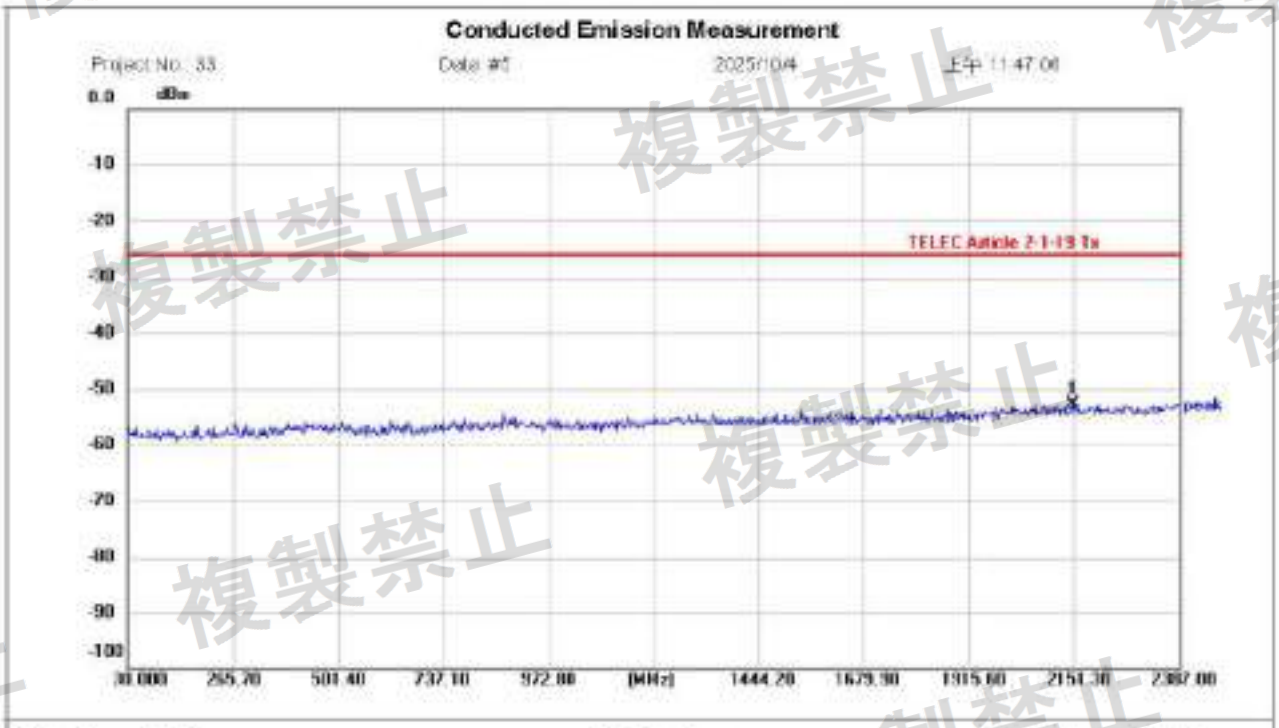


Site: Chamber 04
Limit: TELEC Article 2-1-19 Tx
EUT: W6M22508-24659
M/N:
Mode: Tx BLE 1M CH19
Note:

Polarization:
Power: 3.3 Vdc
Distance:

Temperature: 23.8 (°C)
Humidity: 56 %RH

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	2148.943	-82.88	10.32	-52.56	-26.00	-26.56	peak			P	

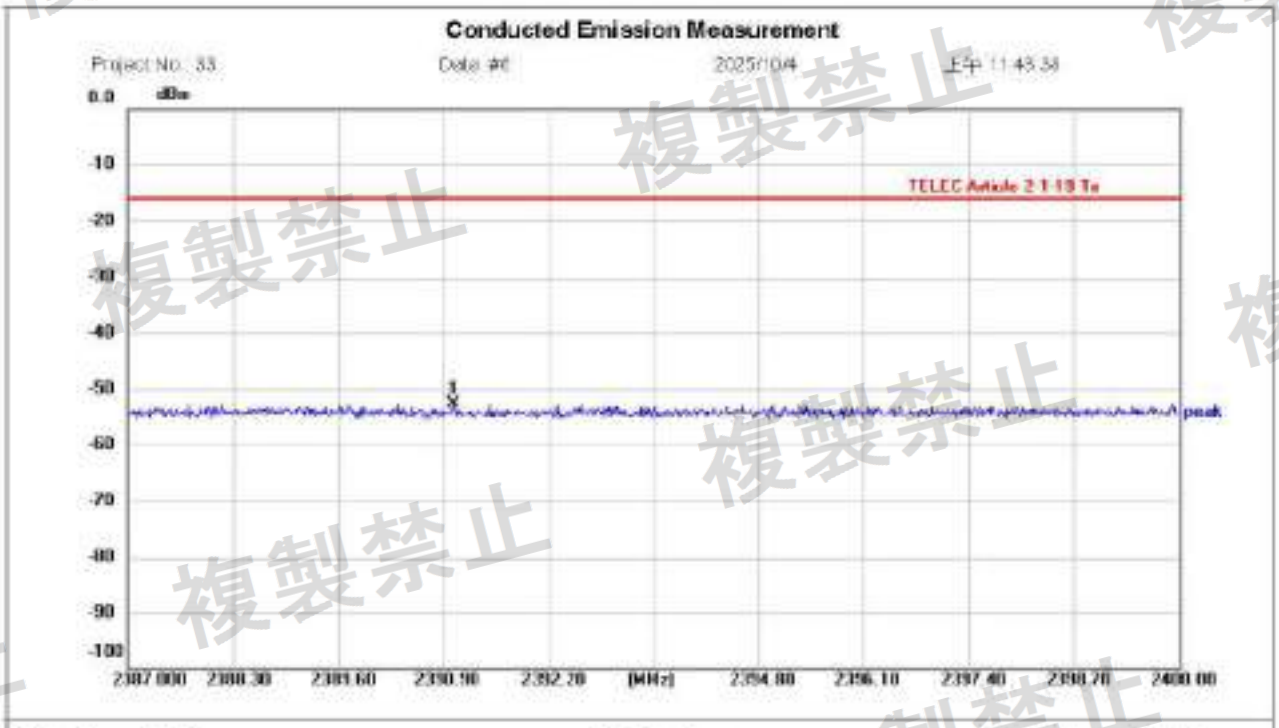


Site: Chamber 04
Limit: TELEC Article 2-1-19 Tx
EUT: W6M22508-24659
M/N:
Mode: Tx BLE 1M CH19
Note:

Polarization:
Power: 3.3 Vdc
Distance:

Temperature: 23.8 (°C)
Humidity: 56 %RH

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	2391.030	-82.92	10.38	-52.56	-16.00	-36.56	peak			P	

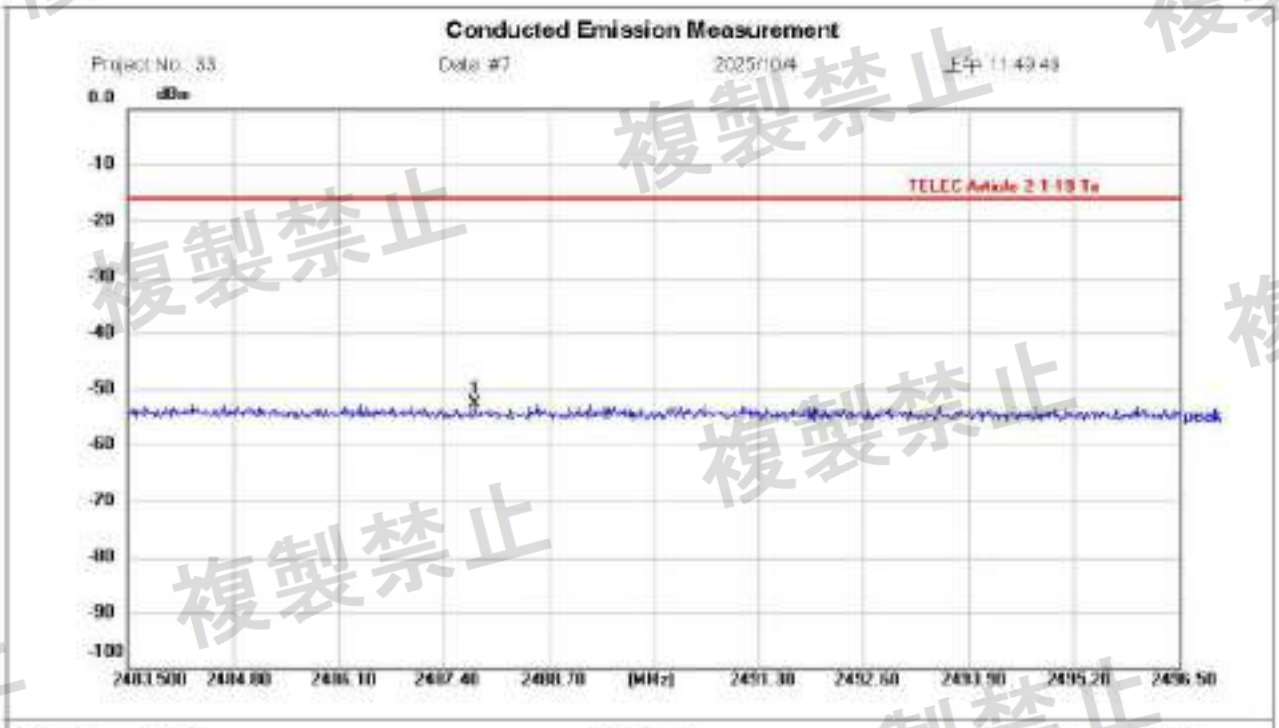


Site: Chamber 04
Limit: TELEC Article 2-1-19 Tx
EUT: W6M22508-24659
M/N:
Mode: Tx BLE 1M CH19
Note:

Polarization:
Power: 3.3 Vdc
Distance:

Temperature: 23.8 (°C)
Humidity: 56 %RH

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	2487.790	-82.91	10.36	-52.55	-16.00	-36.55	peak			P	

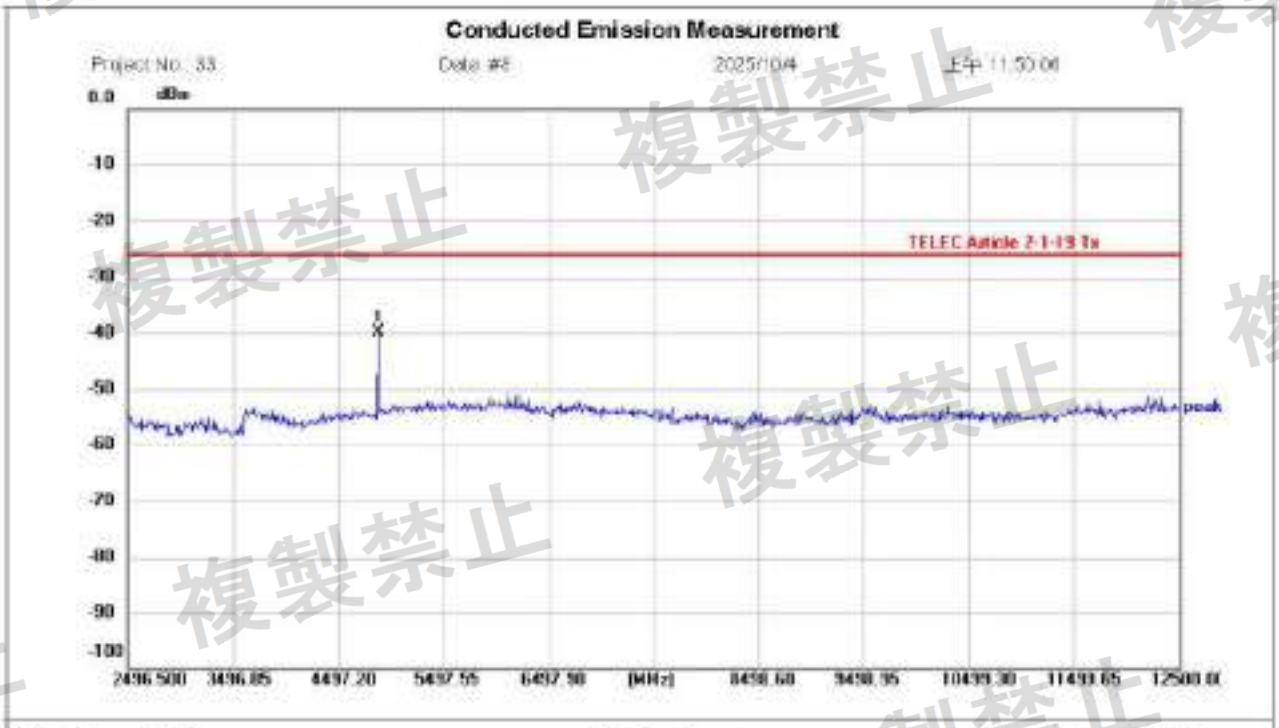


Site: Chamber 04
Limit: TELEC Article 2-1-19 Tx
EUT: W6M22508-24659
M/N:
Mode: Tx BLE 1M CH19
Note:

Polarization:
Power: 3.3 Vdc
Distance:

Temperature: 23.8 (°C)
Humidity: 56 %RH

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	4877.333	-50.39	10.57	-39.82	-26.00	-13.82	peak			P	

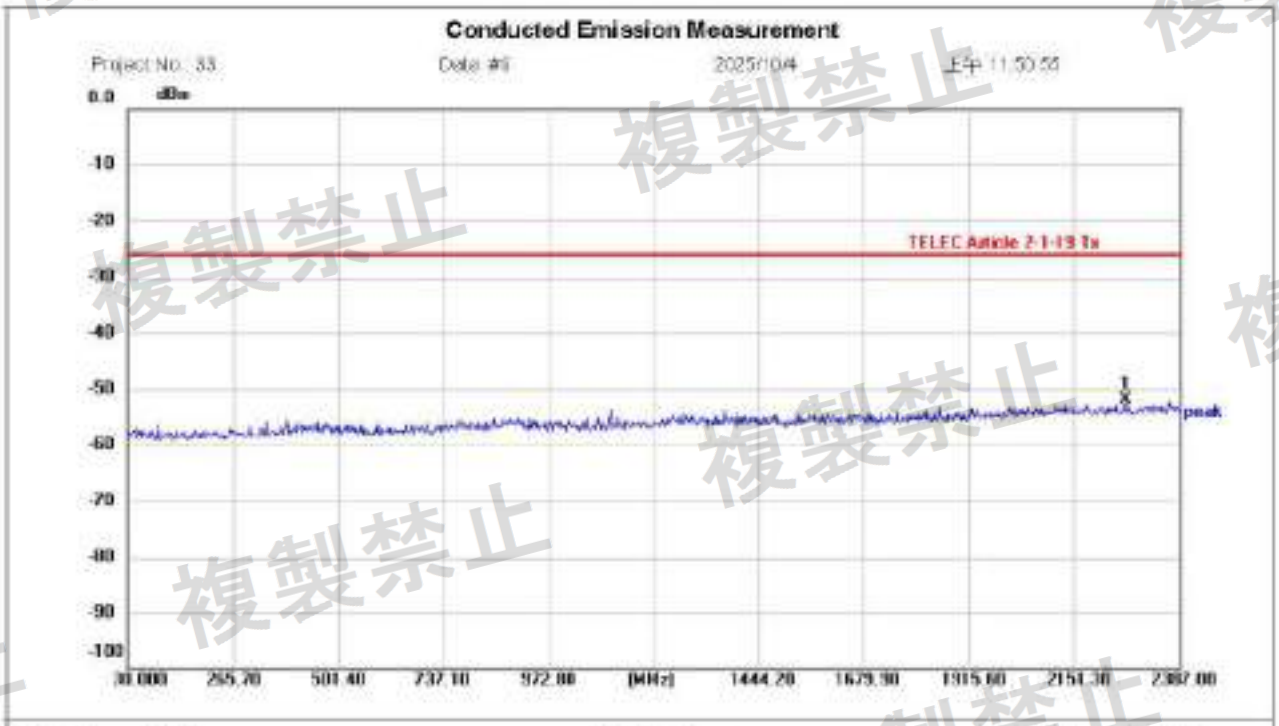


Site: Chamber 04
Limit: TELEC Article 2-1-19 Tx
EUT: W6M22508-24659
M/N:
Mode: Tx BLE 1M CH39
Note:

Polarization:
Power: 3.3 Vdc
Distance:

Temperature: 23.8 (°C)
Humidity: 56 %RH

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	2269.150	-82.27	10.34	-51.93	-26.00	-25.93	peak			P	

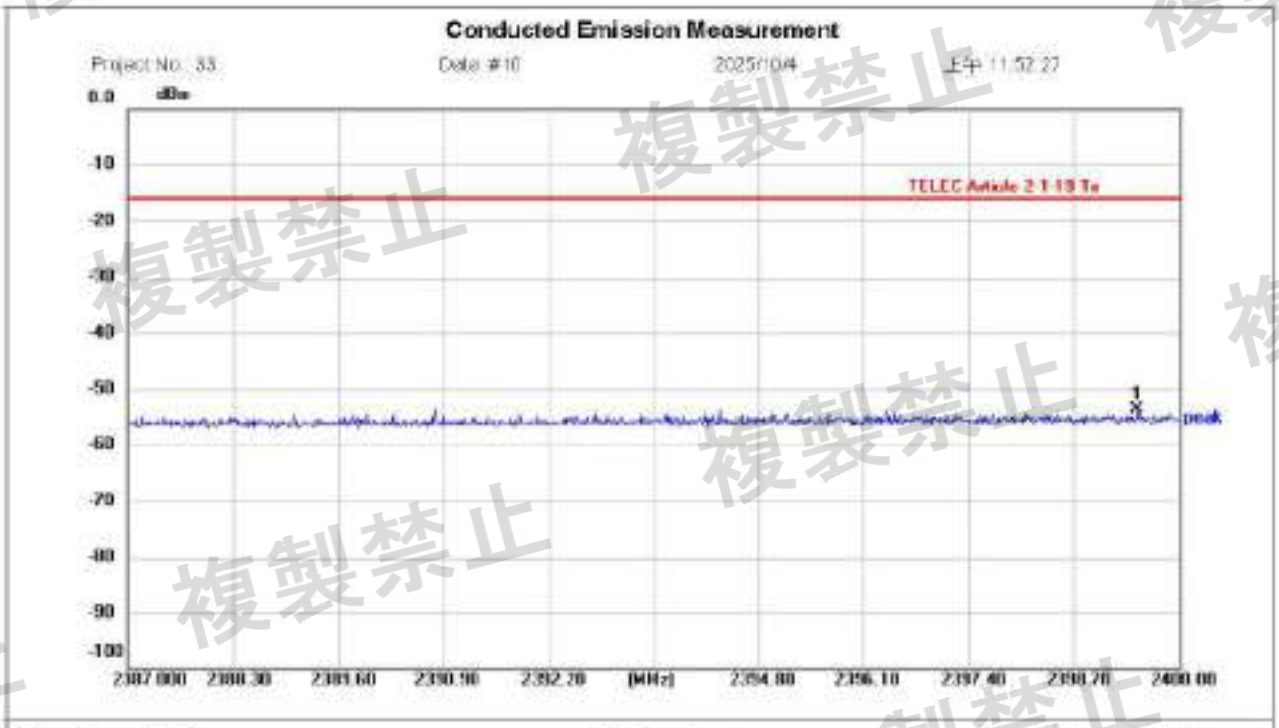


Site: Chamber 04
Limit: TELEC Article 2-1-19 Tx
EUT: W6M22508-24659
M/N:
Mode: Tx BLE 1M CH39
Note:

Polarization:
Power: 3.3 Vdc
Distance:

Temperature: 23.8 (°C)
Humidity: 56 %RH

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	2399.493	-63.89	10.36	-53.53	-16.00	-37.53	peak			P	

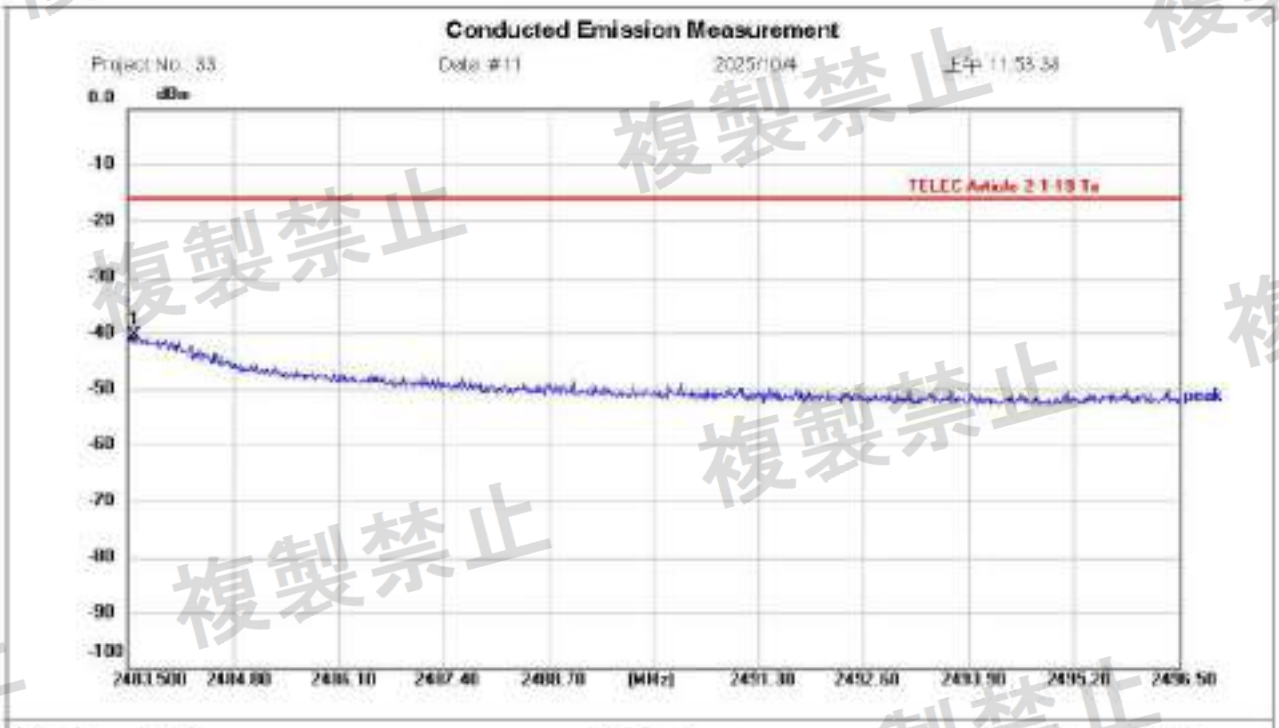


Site: Chamber 04
Limit: TELEC Article 2-1-19 Tx
EUT: W6M22508-24659
M/N:
Mode: Tx BLE 1M CH39
Note:

Polarization:
Power: 3.3 Vdc
Distance:

Temperature: 23.8 (°C)
Humidity: 56 %RH

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	2483.578	-50.75	10.36	-40.39	-16.00	-24.39	peak			P	

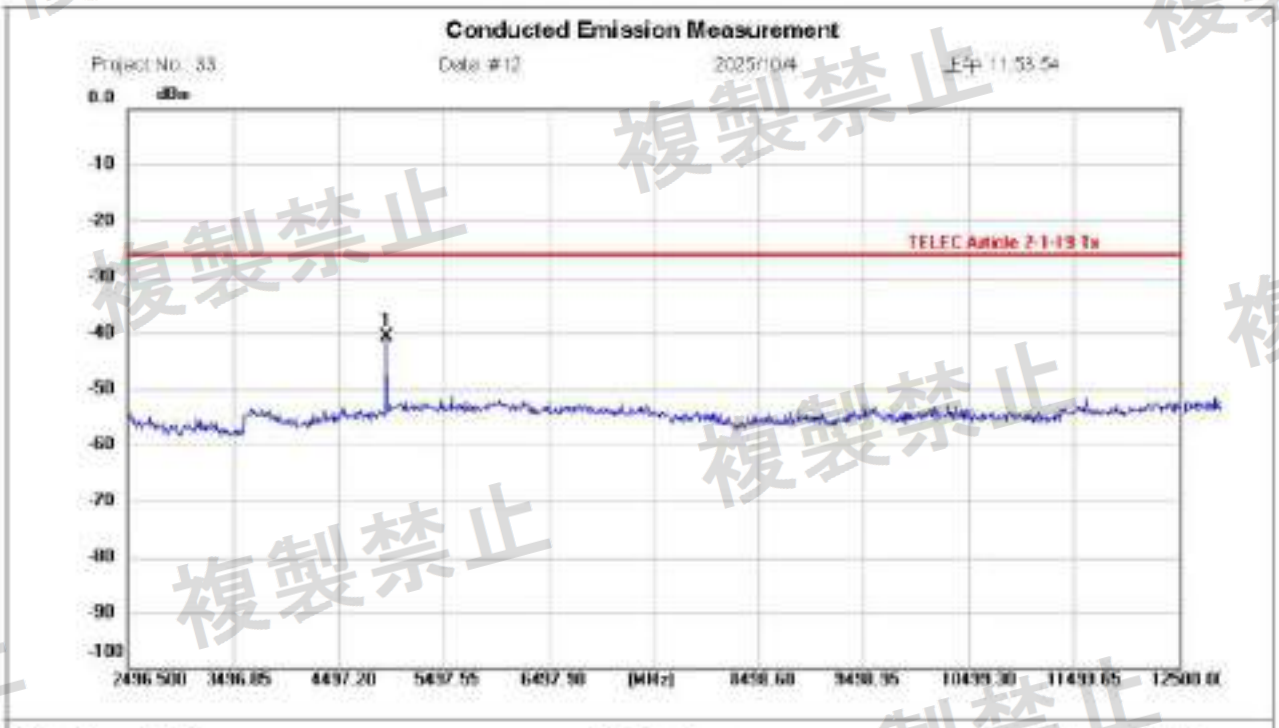


Site: Chamber 04
Limit: TELEC Article 2-1-19 Tx
EUT: W6M22508-24659
M/N:
Mode: Tx BLE 1M CH39
Note:

Polarization:
Power: 3.3 Vdc
Distance:

Temperature: 23.8 (°C)
Humidity: 56 %RH

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	4957.361	-51.23	10.61	-40.62	-26.00	-14.62	peak			P	

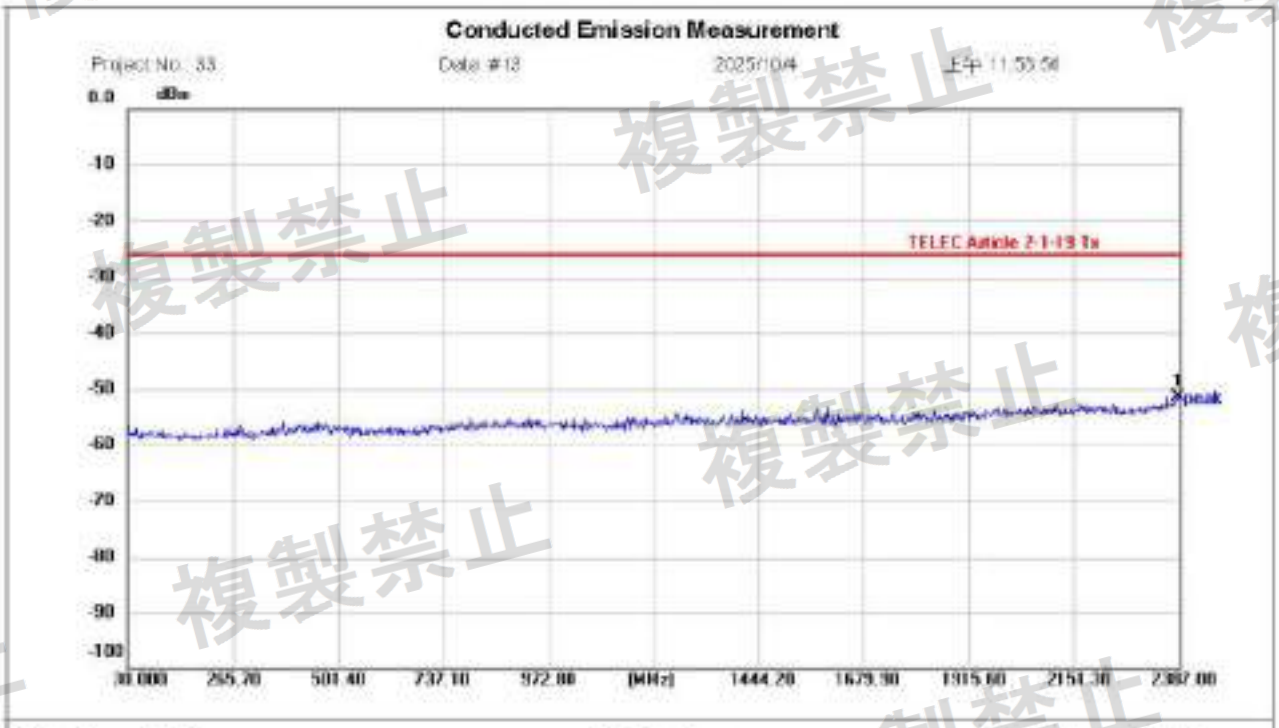


Site: Chamber 04
Limit: TELEC Article 2-1-19 Tx
EUT: W6M22508-24659
M/N:
Mode: Tx BLE 2M CH00
Note:

Polarization:
Power: 3.3 Vdc
Distance:

Temperature: 23.8 (°C)
Humidity: 56 %RH

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	2384.643	-81.70	10.36	-51.34	-26.00	-25.34	peak			P	

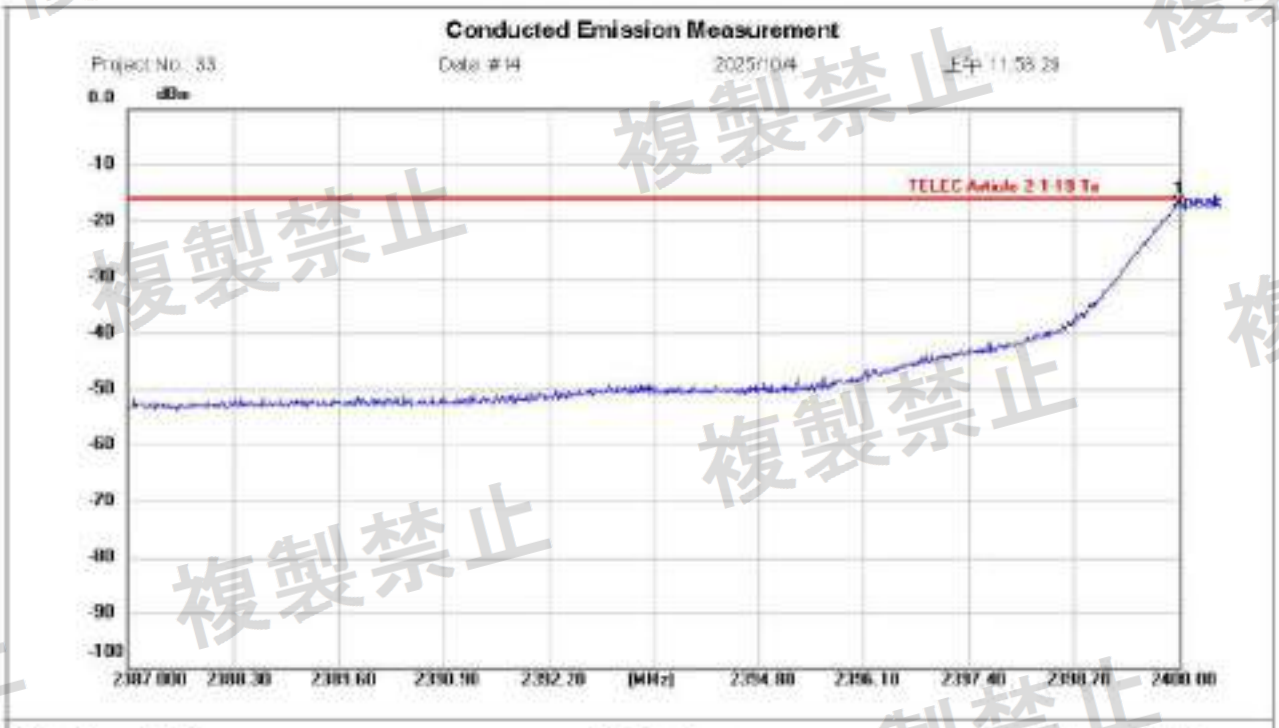


Site: Chamber 04
Limit: TELEC Article 2-1-19 Tx
EUT: W6M22508-24659
M/N:
Mode: Tx BLE 2M CH00
Note:

Polarization:
Power: 3.3 Vdc
Distance:

Temperature: 23.8 (°C)
Humidity: 56 %RH

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	2400.000	-27.19	10.36	-16.83	-16.00	-0.83	peak			P	

Conducted Emission Measurement

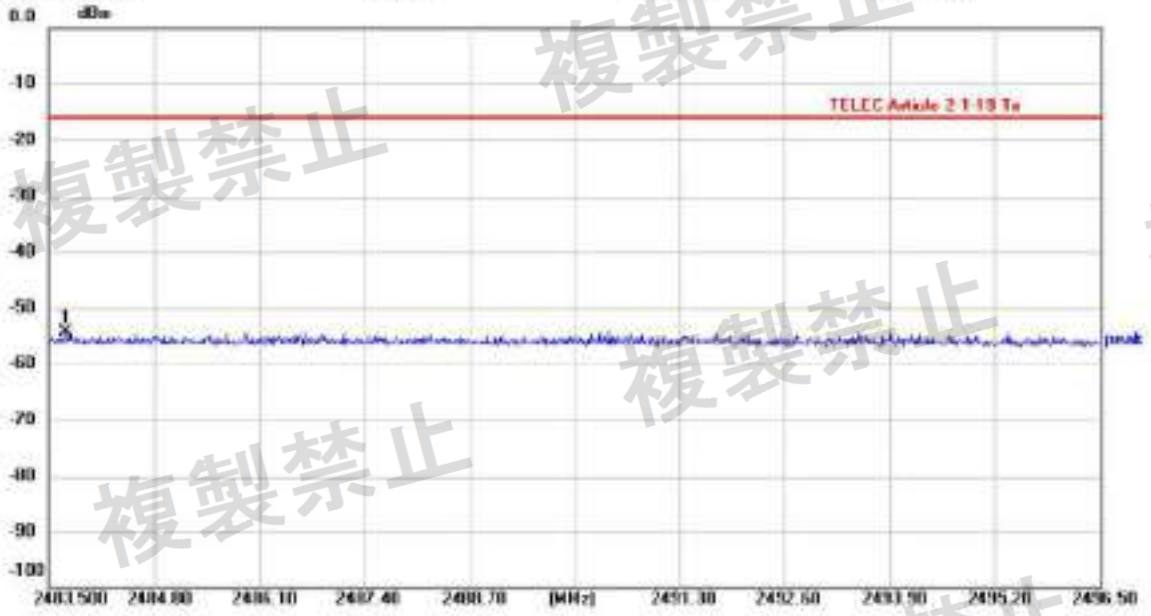


Site: Chamber 04
Limit: TELEC Article 2-1-19 Tx
EUT: W6M22508-24659
M/N:
Mode: Tx BLE 2M CH00
Note:

Polarization:
Power: 3.3 Vdc
Distance:

Temperature: 23.8 (°C)
Humidity: 56 %RH

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	2483.695	-84.61	10.36	-54.25	-16.00	-38.25	peak			P	

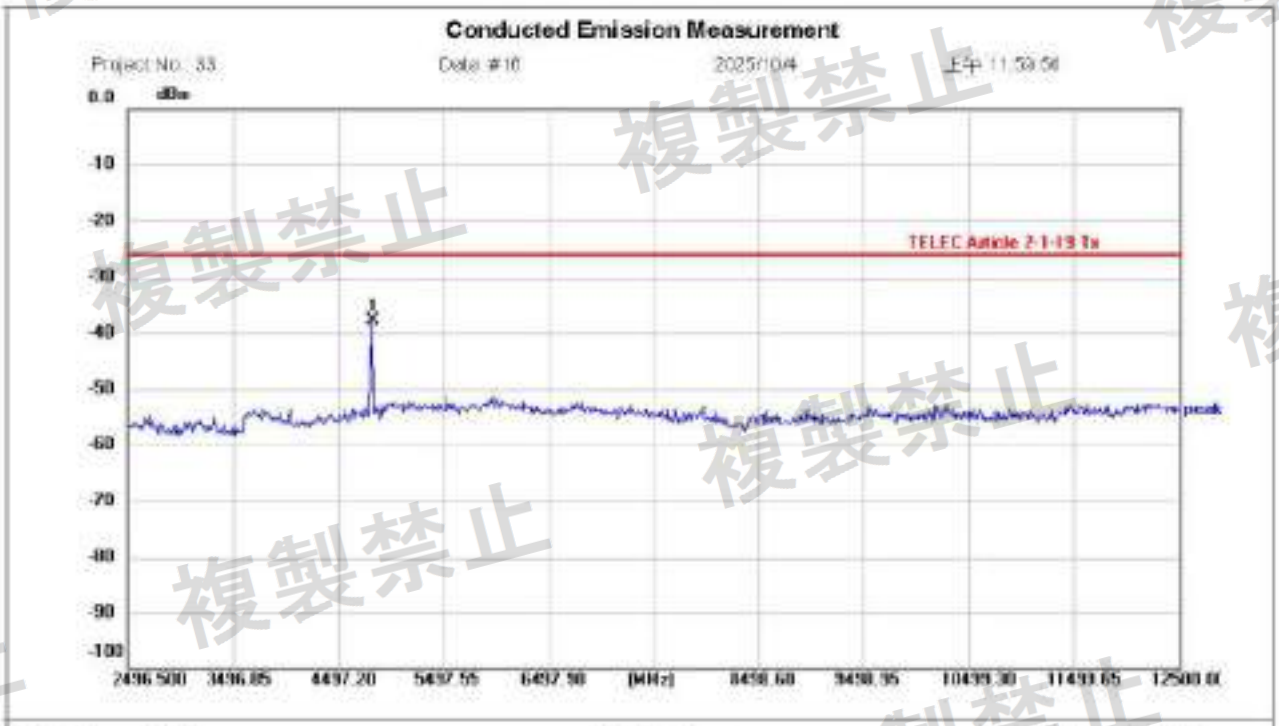


Site: Chamber 04
Limit: TELEC Article 2-1-19 Tx
EUT: W6M22508-24659
M/N:
Mode: Tx BLE 2M CH00
Note:

Polarization:
Power: 3.3 Vdc
Distance:

Temperature: 23.8 (°C)
Humidity: 56 %RH

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	4807.309	-48.58	10.60	-37.98	-26.00	-11.98	peak			P	

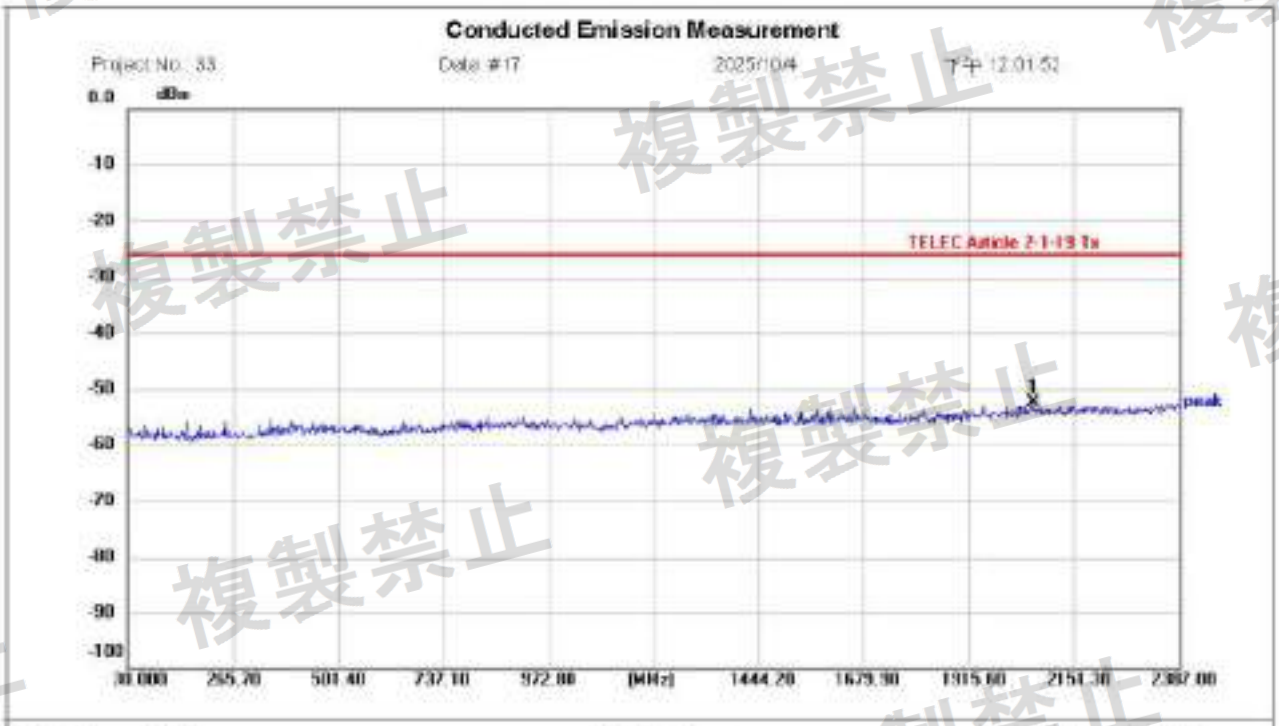


Site: Chamber 04
Limit: TELEC Article 2-1-19 Tx
EUT: W6M22508-24659
M/N:
Mode: Tx BLE 2M CH19
Note:

Polarization:
Power: 3.3 Vdc
Distance:

Temperature: 23.8 (°C)
Humidity: 56 %RH

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	2059.377	-82.67	10.32	-52.35	-26.00	-26.35	peak			P	

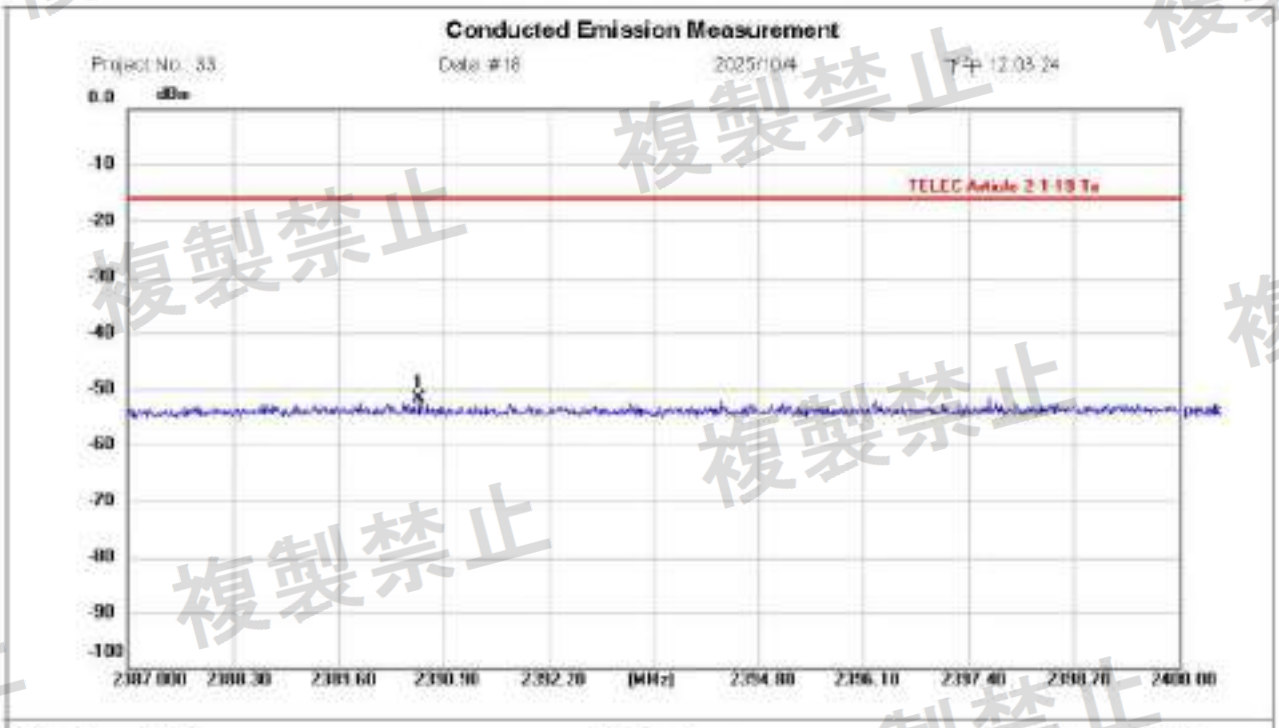


Site: Chamber 04
Limit: TELEC Article 2-1-19 Tx
EUT: W6M22508-24659
M/N:
Mode: Tx BLE 2M CH19
Note:

Polarization:
Power: 3.3 Vdc
Distance:

Temperature: 23.8 (°C)
Humidity: 56 %RH

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	2390.601	-81.91	10.36	-51.55	-16.00	-35.55	peak			P	

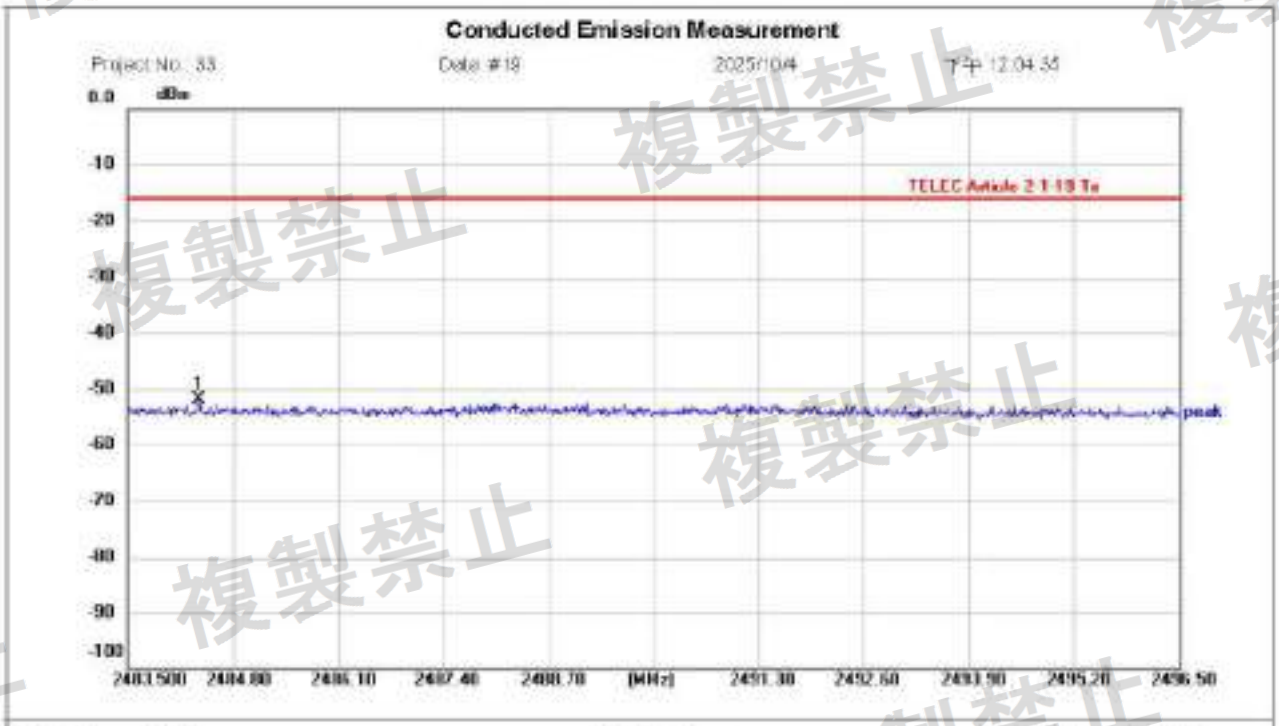


Site: Chamber 04
Limit: TELEC Article 2-1-19 Tx
EUT: W6M22508-24659
M/N:
Mode: Tx BLE 2M CH19
Note:

Polarization:
Power: 3.3 Vdc
Distance:

Temperature: 23.8 (°C)
Humidity: 56 %RH

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	2484.371	-82.25	10.36	-51.89	-16.00	-35.89	peak			P	

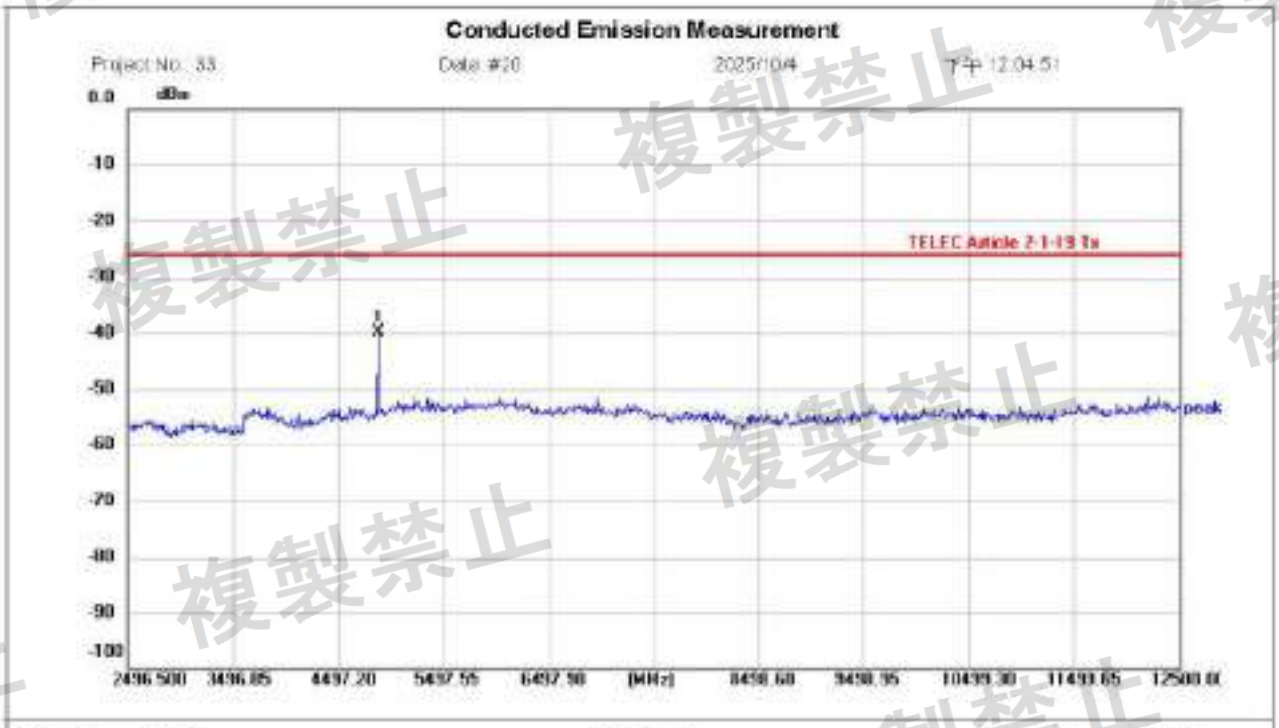


Site: Chamber 04
Limit: TELEC Article 2-1-19 Tx
EUT: W6M22508-24659
M/N:
Mode: Tx BLE 2M CH19
Note:

Polarization:
Power: 3.3 Vdc
Distance:

Temperature: 23.8 (°C)
Humidity: 56 %RH

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	4877.333	-50.38	10.57	-39.81	-26.00	-13.81	peak			P	

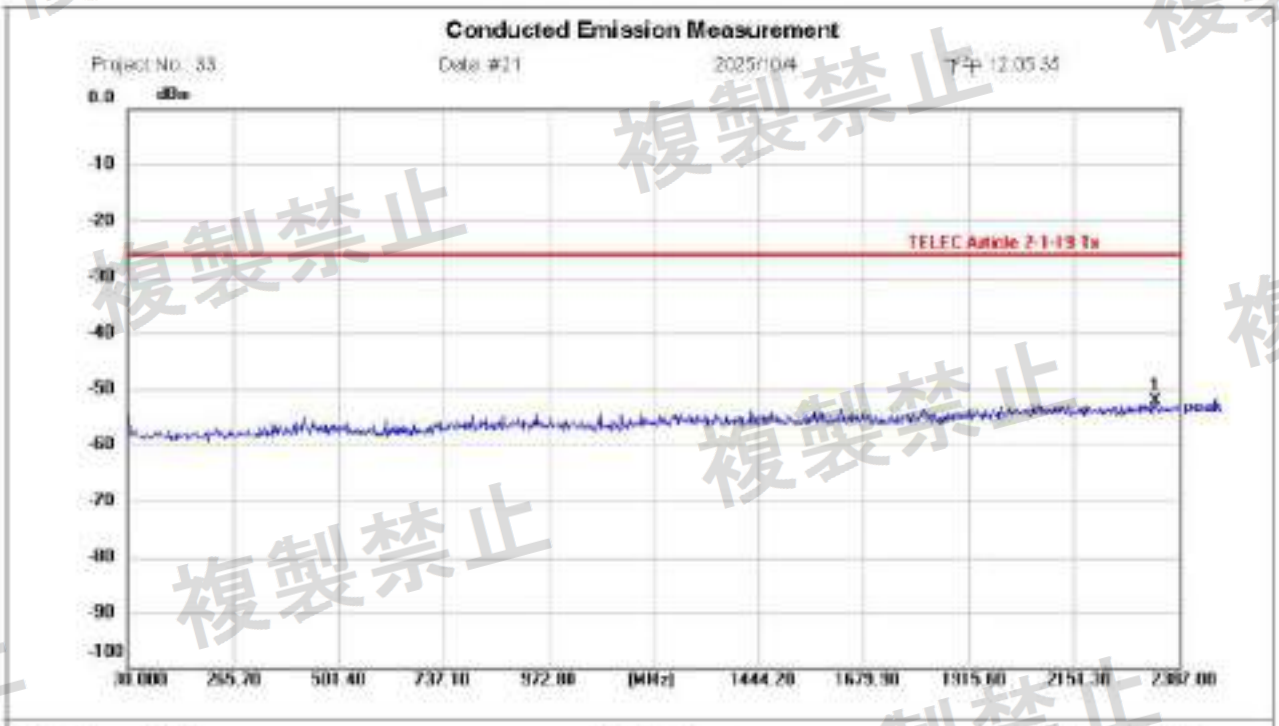


Site: Chamber 04
Limit: TELEC Article 2-1-19 Tx
EUT: W6M22508-24659
M/N:
Mode: Tx BLE 2M CH39
Note:

Polarization:
Power: 3.3 Vdc
Distance:

Temperature: 23.8 (°C)
Humidity: 56 %RH

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	2335.146	-82.54	10.35	-52.19	-26.00	-26.19	peak			P	

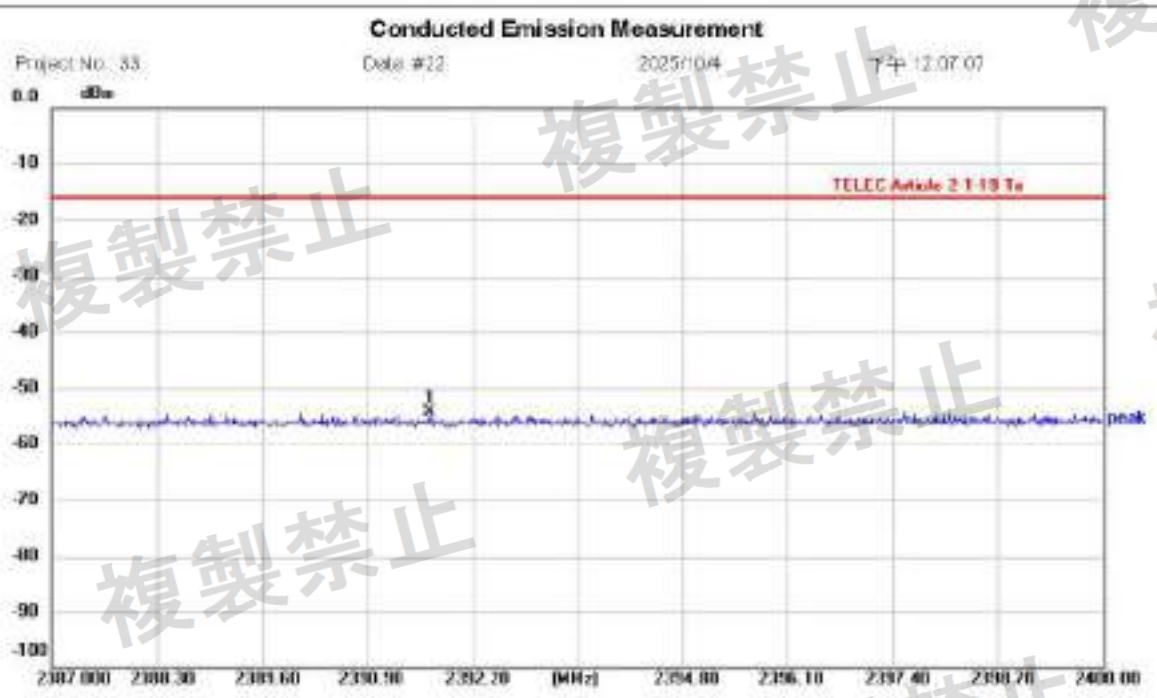


Site: Chamber 04
Limit: TELEC Article 2-1-19 Tx
EUT: W6M22508-24659
M/N:
Mode: Tx BLE 2M CH39
Note:

Polarization:
Power: 3.3 Vdc
Distance:

Temperature: 23.8 (°C)
Humidity: 56 %RH

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	2391.667	-84.66	10.36	-54.30	-16.00	-38.30	peak			P	

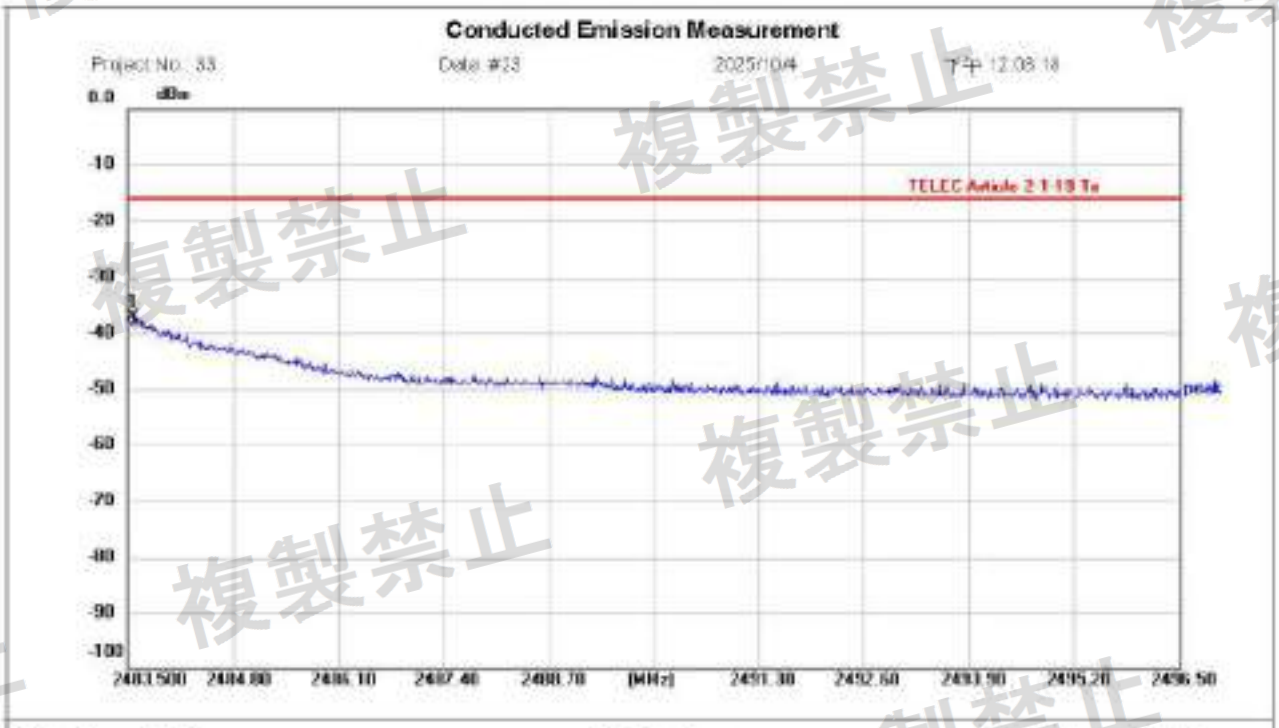


Site: Chamber 04
Limit: TELEC Article 2-1-19 Tx
EUT: W6M22508-24659
M/N:
Mode: Tx BLE 2M CH39
Note:

Polarization:
Power: 3.3 Vdc
Distance:

Temperature: 23.8 (°C)
Humidity: 56 %RH

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	2483.585	-47.39	10.36	-37.03	-16.00	-21.03	peak			P	

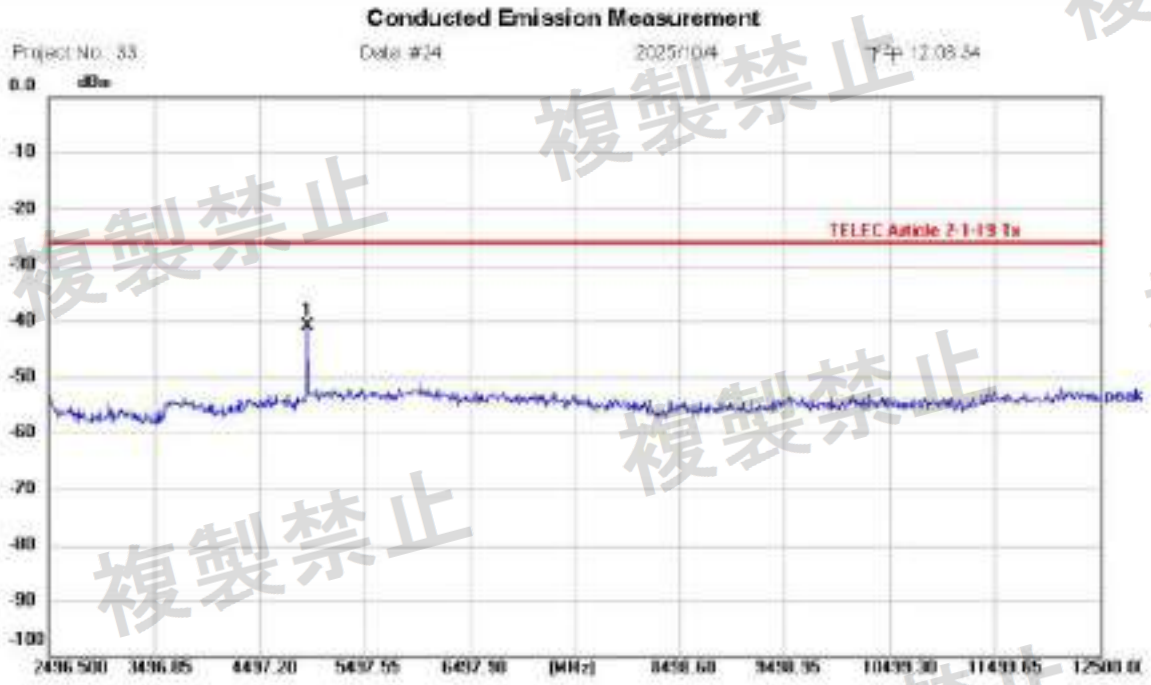


Site: Chamber 04
Limit: TELEC Article 2-1-19 Tx
EUT: W6M22508-24659
M/N:
Mode: Tx BLE 2M CH39
Note:

Polarization:
Power: 3.3 Vdc
Distance:

Temperature: 23.8 (°C)
Humidity: 56 %RH

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	4957.361	-51.38	10.61	-40.77	-26.00	-14.77	peak			P	

External Antenna

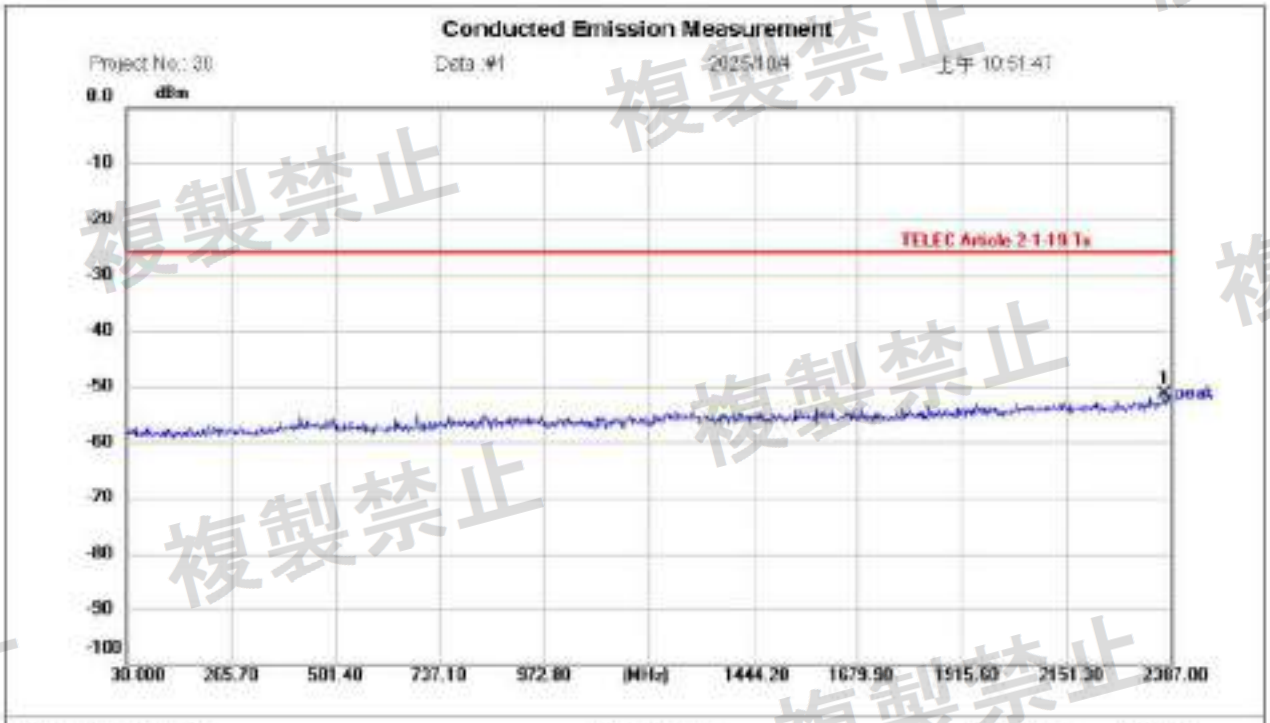


Site: Chamber 04
Limit: TELEC Article 2-1-19 Tx
EUT: W6M22508-24659
M/N:
Mode: Tx BLE 1M CH00
Note:

Polarization:
Power: 3 Vd.c.
Distance:

Temperature: 23.9 (°C)
Humidity: 58 %RH

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	2372.858	-61.63	10.35	-51.28	-26.00	-25.28	peak			P	

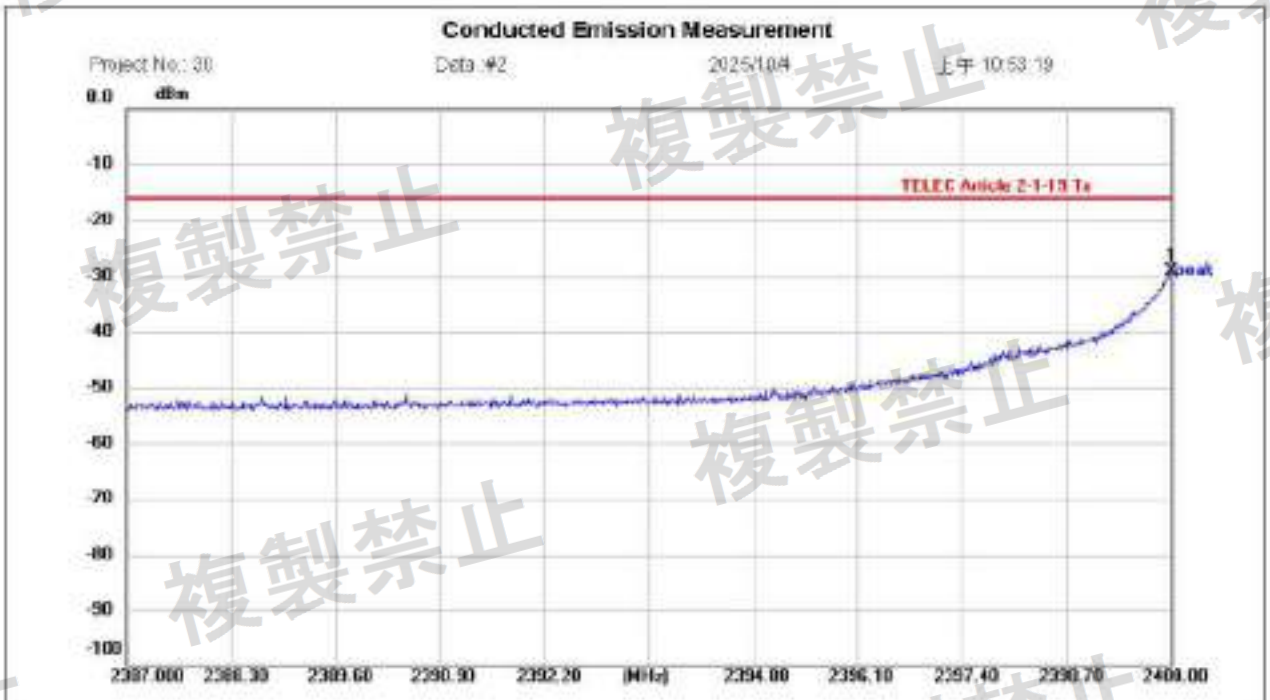


Site: Chamber 04
Limit: TELEC Article 2-1-19 Tx
EUT: W6M22508-24659
M/N:
Mode: Tx BLE 1M CH00
Note:

Polarization:
Power: 3 Vd.c
Distance:

Temperature: 23.9 (°C)
Humidity: 56 %RH

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	2400.000	-39.39	10.36	-29.03	-16.00	-13.03	peak			P	

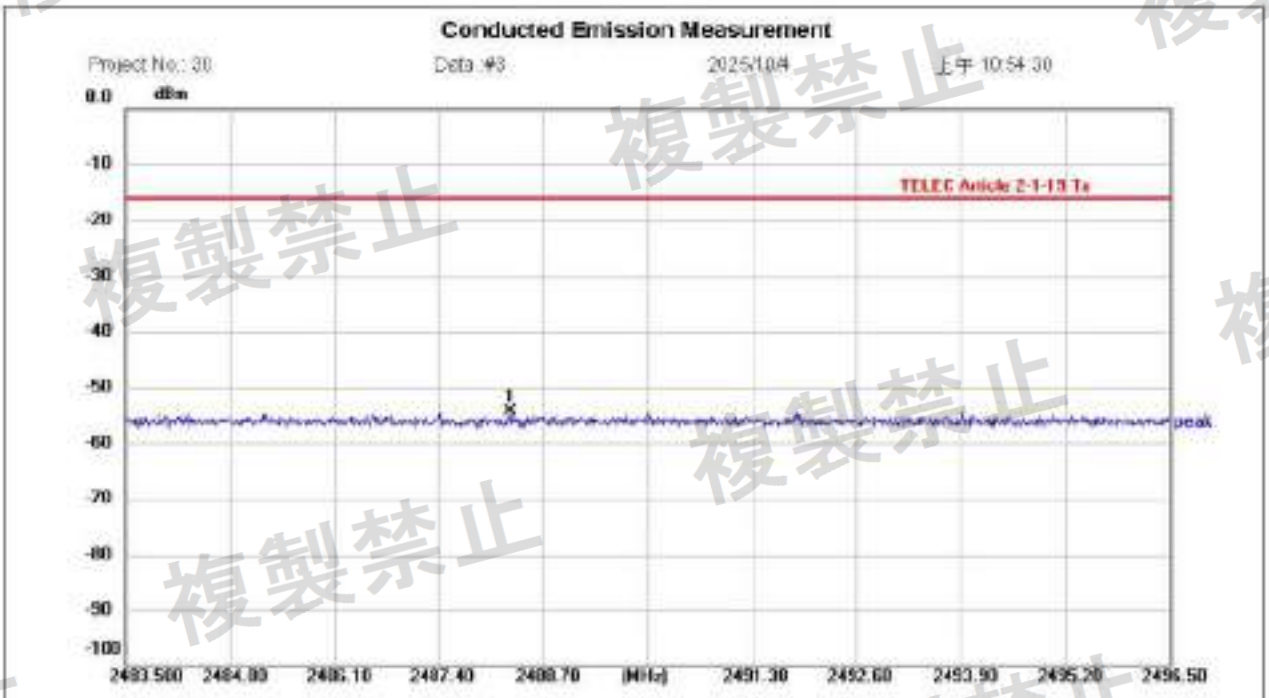


Site: Chamber 04
Limit: TELEC Article 2-1-19 Tx
EUT: W6M22508-24659
M/N:
Mode: Tx BLE 1M CH00
Note:

Polarization:
Power: 3 Vd.c
Distance:

Temperature: 23.9 (°C)
Humidity: 56 %RH

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	2488.297	-64.80	10.36	-54.44	-16.00	-38.44	peak			P	

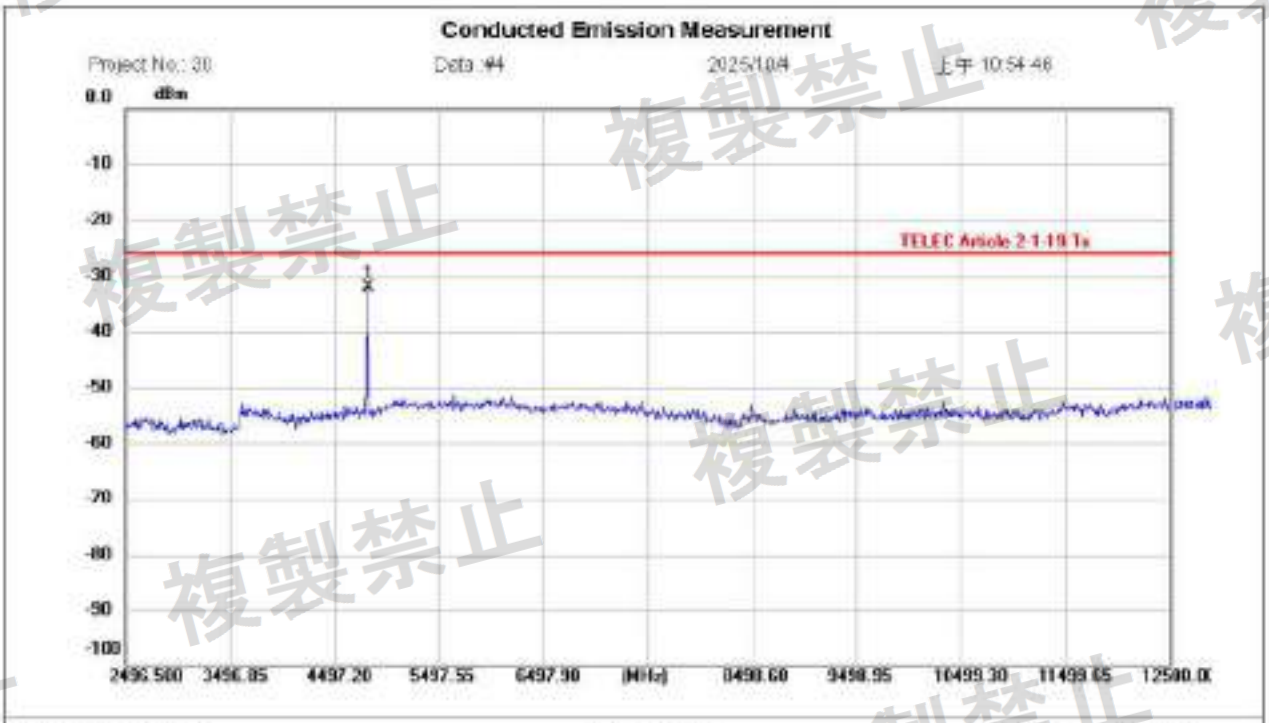


Site: Chamber 04
Limit: TELEC Article 2-1-19 Tx
EUT: W6M22508-24659
M/N:
Mode: Tx BLE 1M CH00
Note:

Polarization:
Power: 3 Vd.c
Distance:

Temperature: 23.9 (°C)
Humidity: 56 %RH

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	4807.309	-42.68	10.60	-32.08	-26.00	-6.08	peak			P	

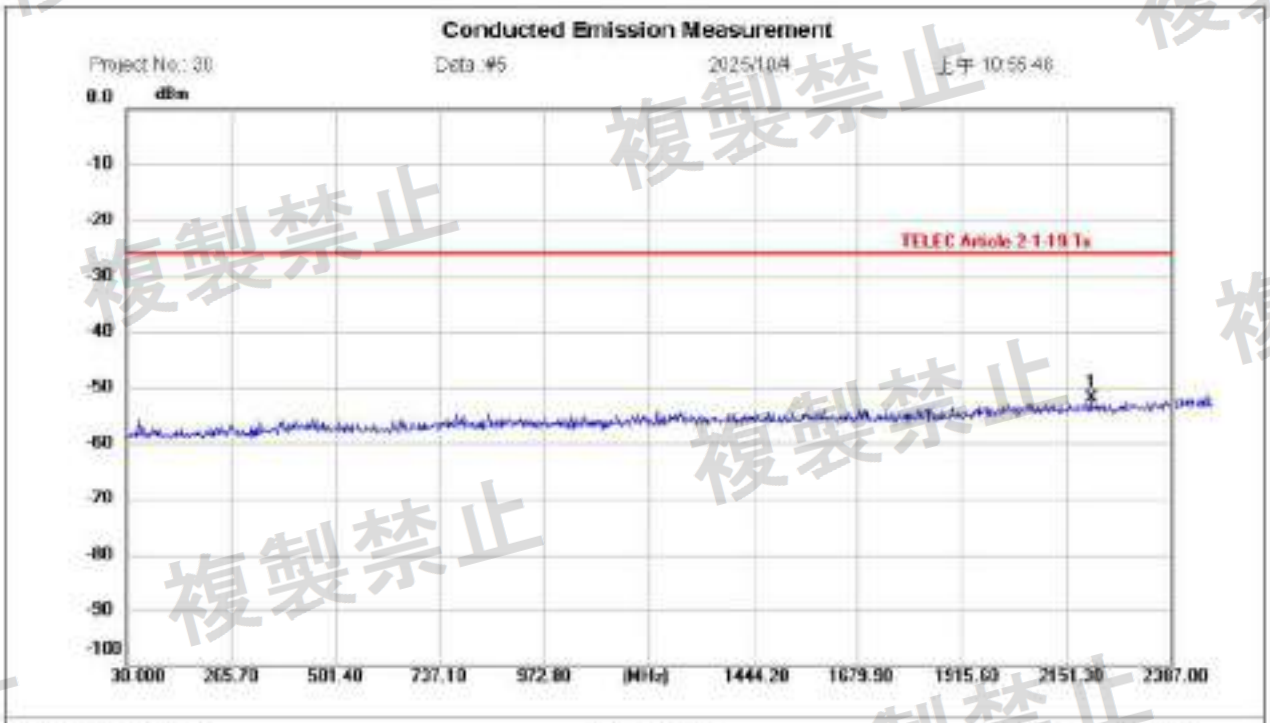


Site: Chamber 04
Limit: TELEC Article 2-1-19 Tx
EUT: W6M22508-24659
M/N:
Mode: Tx BLE 1M CH19
Note:

Polarization:
Power: 3 Vd.c
Distance:

Temperature: 23.9 (°C)
Humidity: 56 %RH

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	2207.868	-62.29	10.34	-51.95	-26.00	-25.95	peak			P	

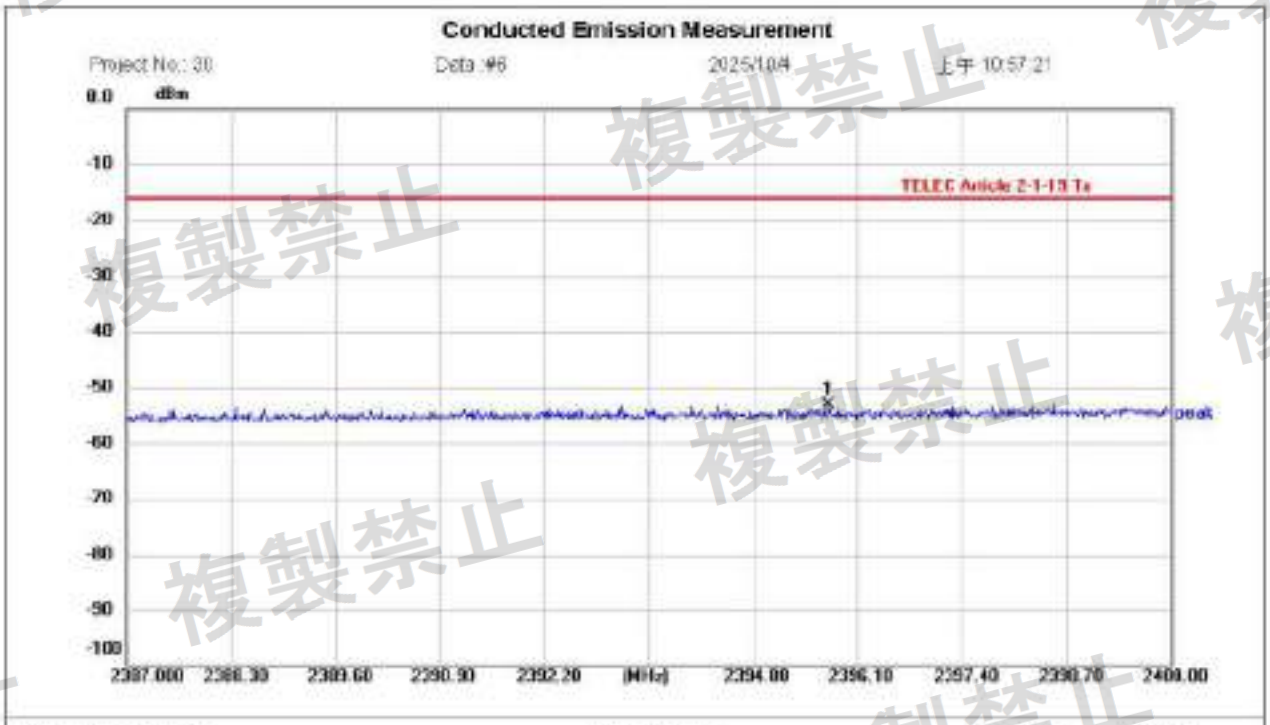


Site: Chamber 04
Limit: TELEC Article 2-1-19 Tx
EUT: W6M22508-24659
M/N:
Mode: Tx BLE 1M CH19
Note:

Polarization:
Power: 3 Vd.c
Distance:

Temperature: 23.9 (°C)
Humidity: 56 %RH

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	2395.749	-63.52	10.36	-53.16	-16.00	-37.16	peak			P	

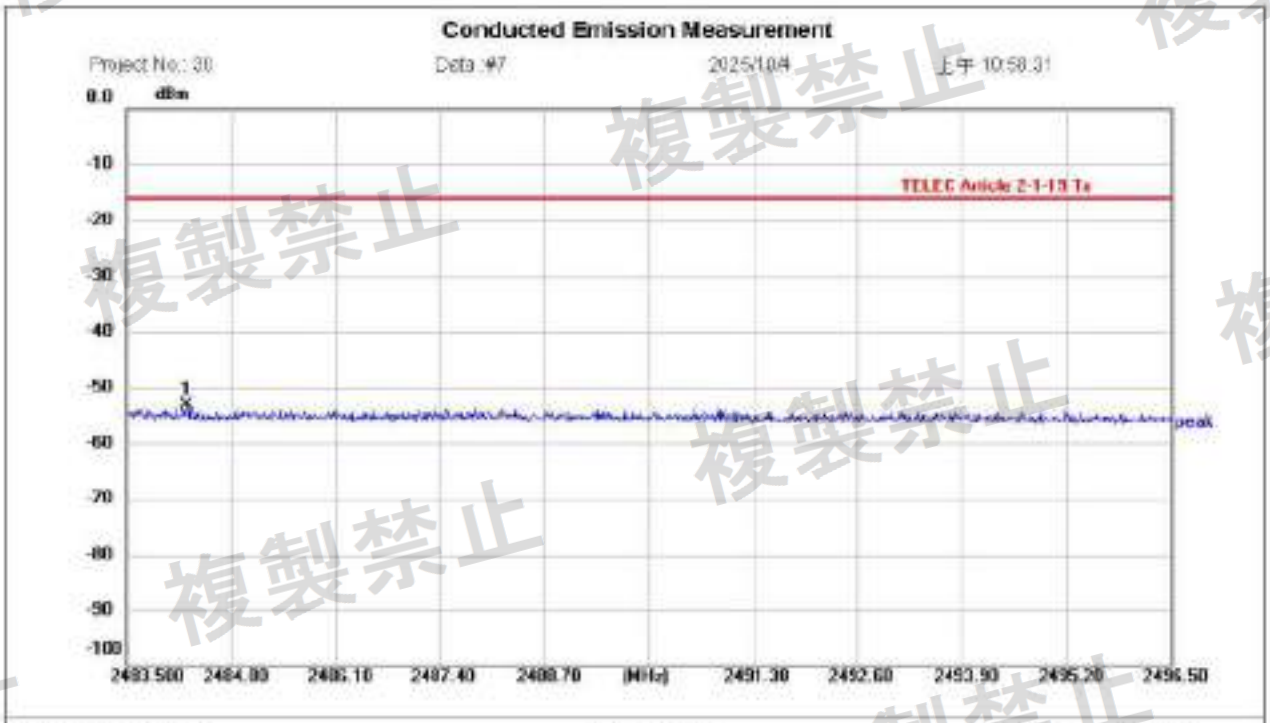


Site: Chamber 04
Limit: TELEC Article 2-1-19 Tx
EUT: W6M22508-24659
M/N:
Mode: Tx BLE 1M CH19
Note:

Polarization:
Power: 3 Vd.c
Distance:

Temperature: 23.9 (°C)
Humidity: 56 %RH

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	2484.254	-63.56	10.36	-53.20	-16.00	-37.20	peak			P	

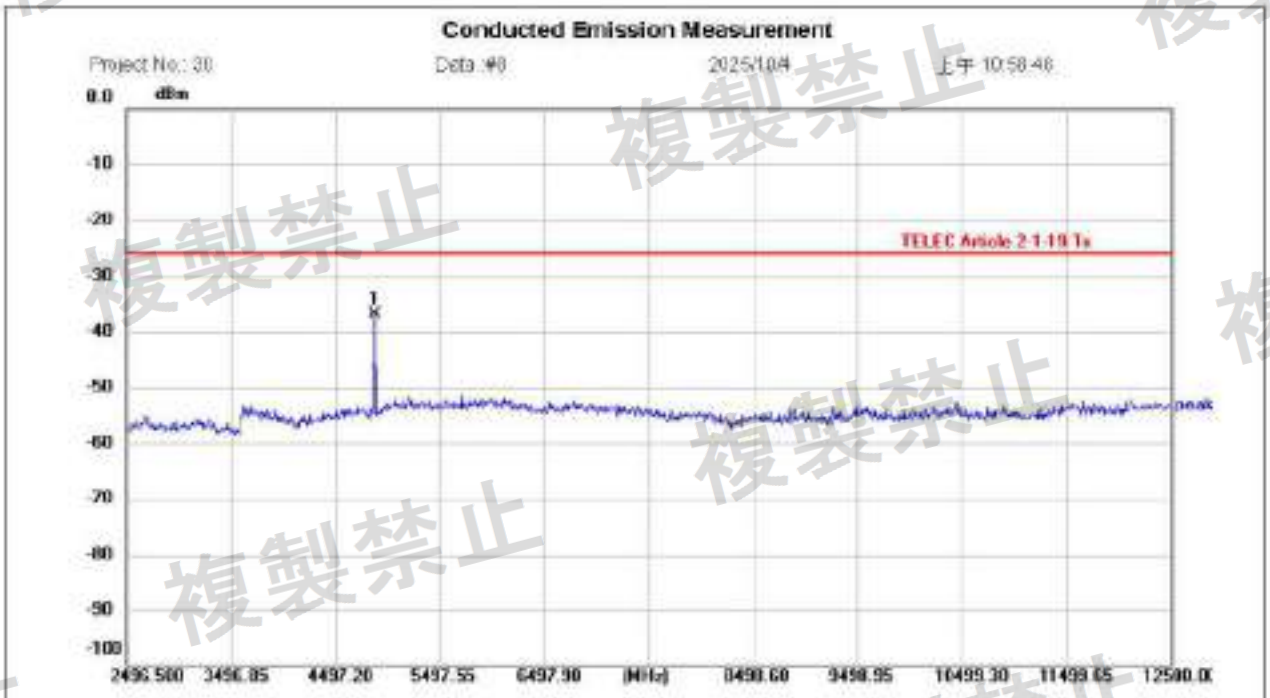


Site: Chamber 04
Limit: TELEC Article 2-1-19 Tx
EUT: W6M22508-24659
M/N:
Mode: Tx BLE 1M CH19
Note:

Polarization:
Power: 3 Vd.c
Distance:

Temperature: 23.9 (°C)
Humidity: 56 %RH

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	4877.333	-47.39	10.57	-36.82	-26.00	-10.82	peak			P	

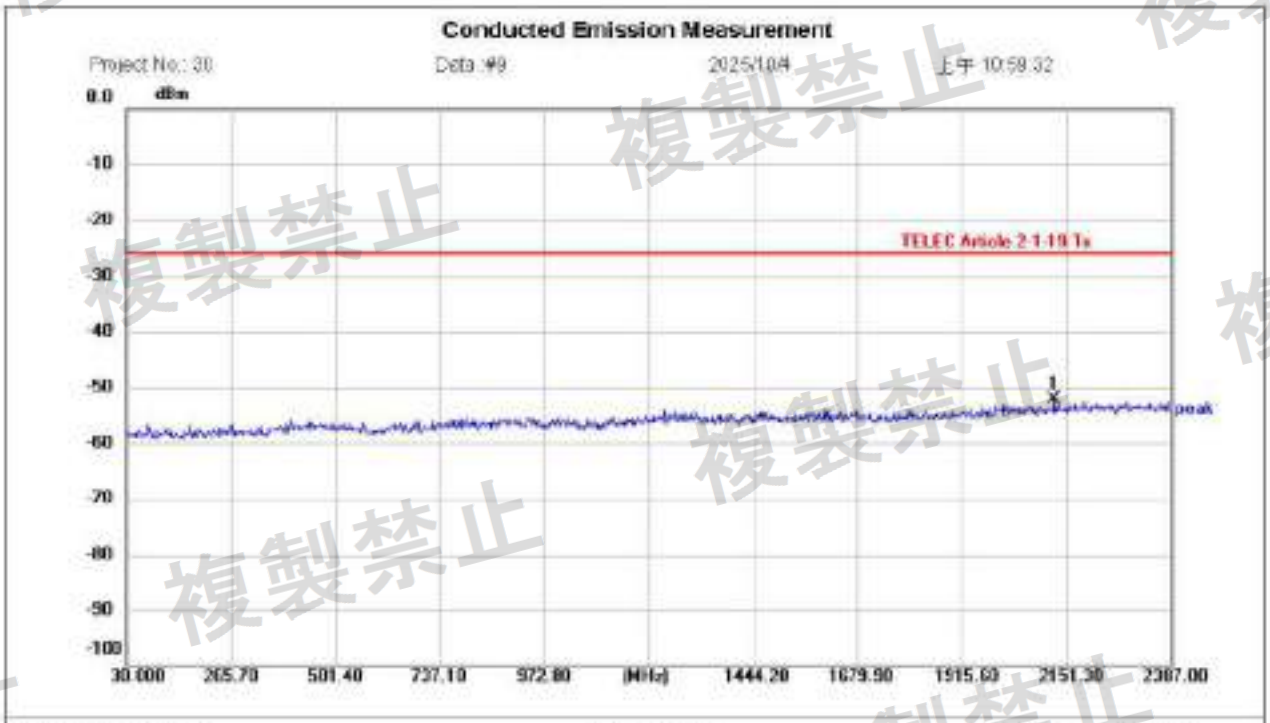


Site: Chamber 04
Limit: TELEC Article 2-1-19 Tx
EUT: W6M22508-24659
M/N:
Mode: Tx BLE 1M CH39
Note:

Polarization:
Power: 3 Vd.c
Distance:

Temperature: 23.9 (°C)
Humidity: 56 %RH

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	2125.373	-62.51	10.32	-52.19	-26.00	-26.19	peak			P	

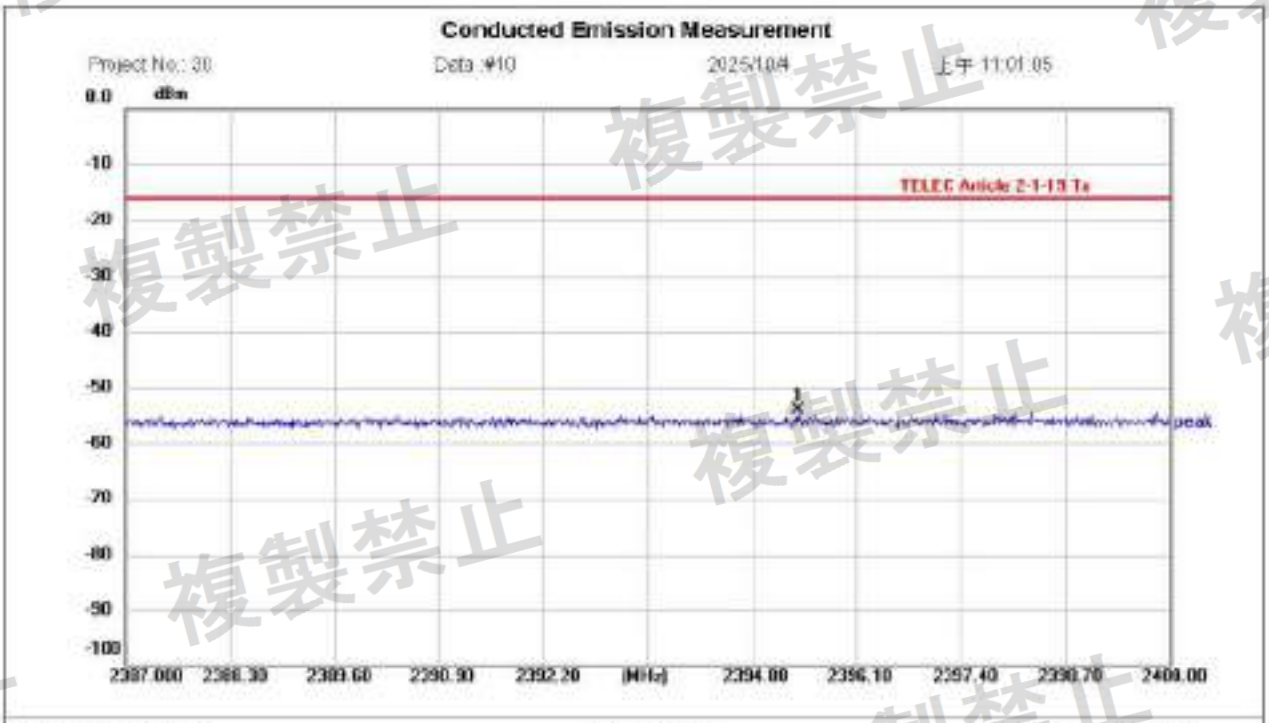


Site: Chamber 04
Limit: TELEC Article 2-1-19 Tx
EUT: W6M22508-24659
M/N:
Mode: Tx BLE 1M CH39
Note:

Polarization:
Power: 3 Vd.c
Distance:

Temperature: 23.9 (°C)
Humidity: 56 %RH

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	2395.372	-64.58	10.36	-54.22	-16.00	-38.22	peak			P	

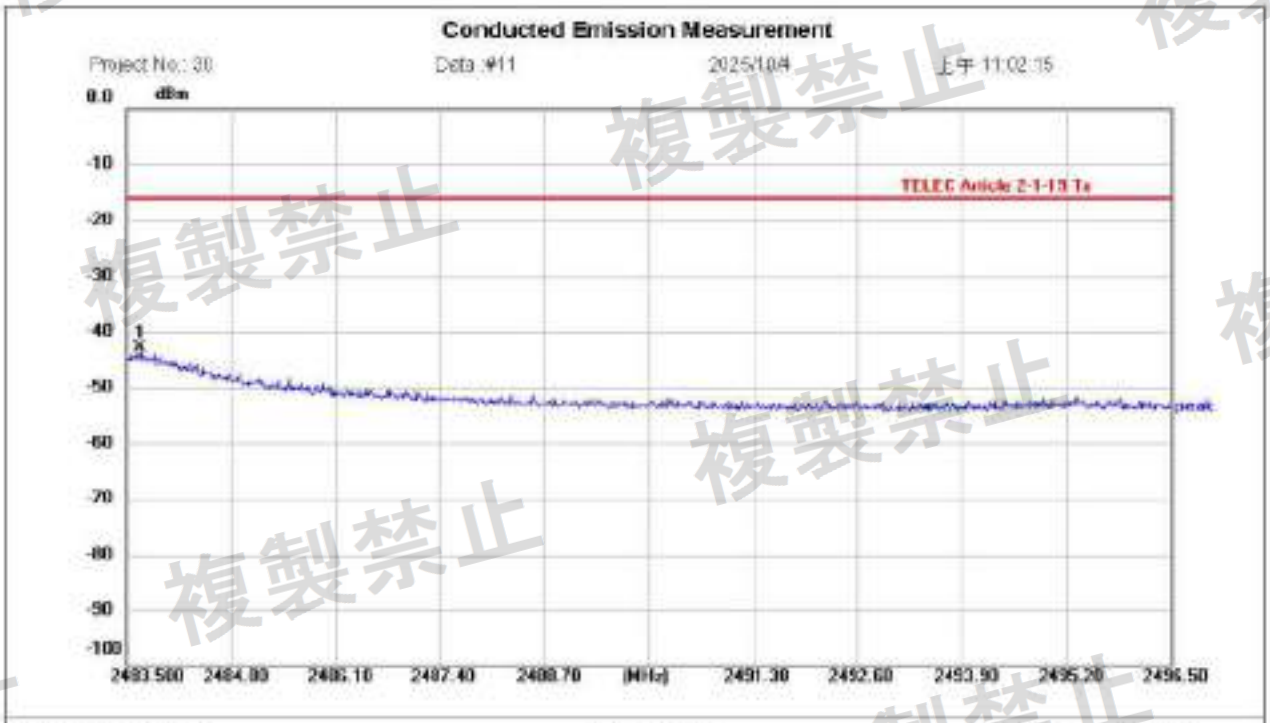


Site: Chamber 04
Limit: TELEC Article 2-1-19 Tx
EUT: W6M22508-24659
M/N:
Mode: Tx BLE 1M CH39
Note:

Polarization:
Power: 3 Vd.c
Distance:

Temperature: 23.9 (°C)
Humidity: 56 %RH

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	2483.669	-53.31	10.36	-42.95	-16.00	-26.95	peak			P	

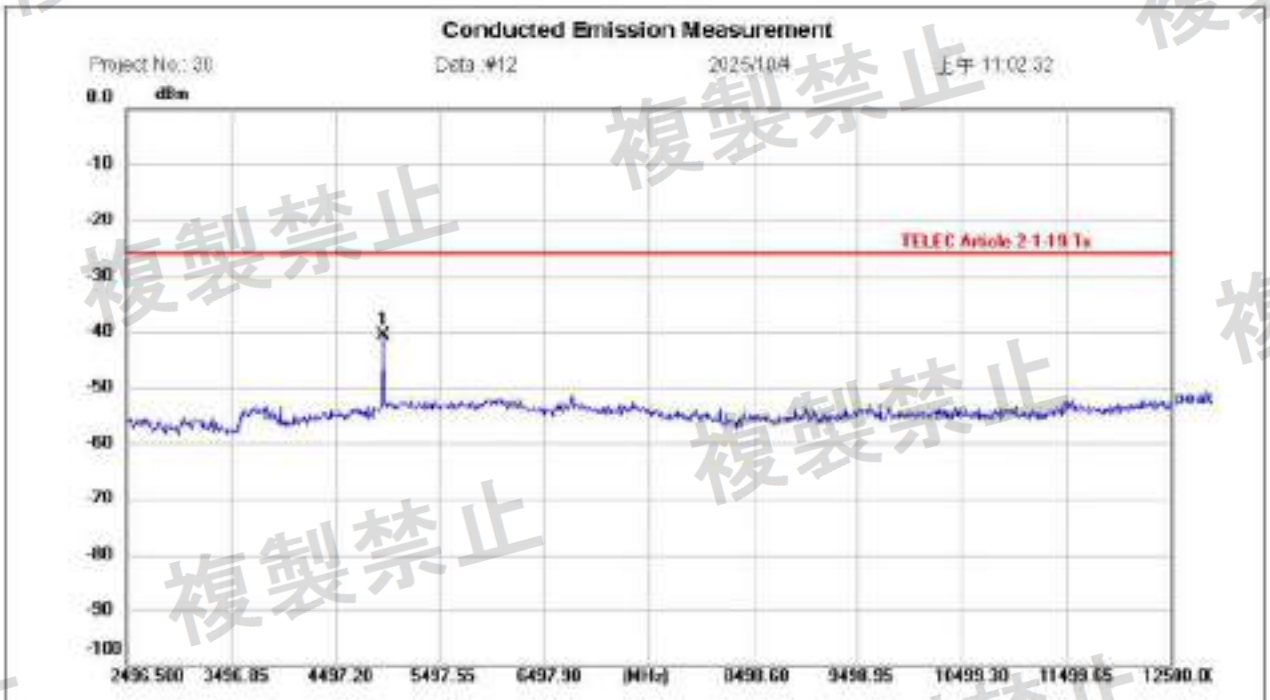


Site: Chamber 04
Limit: TELEC Article 2-1-19 Tx
EUT: W6M22508-24659
M/N:
Mode: Tx BLE 1M CH39
Note:

Polarization:
Power: 3 Vd.c
Distance:

Temperature: 23.9 (°C)
Humidity: 56 %RH

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	4957.361	-51.25	10.61	-40.64	-26.00	-14.64	peak			P	

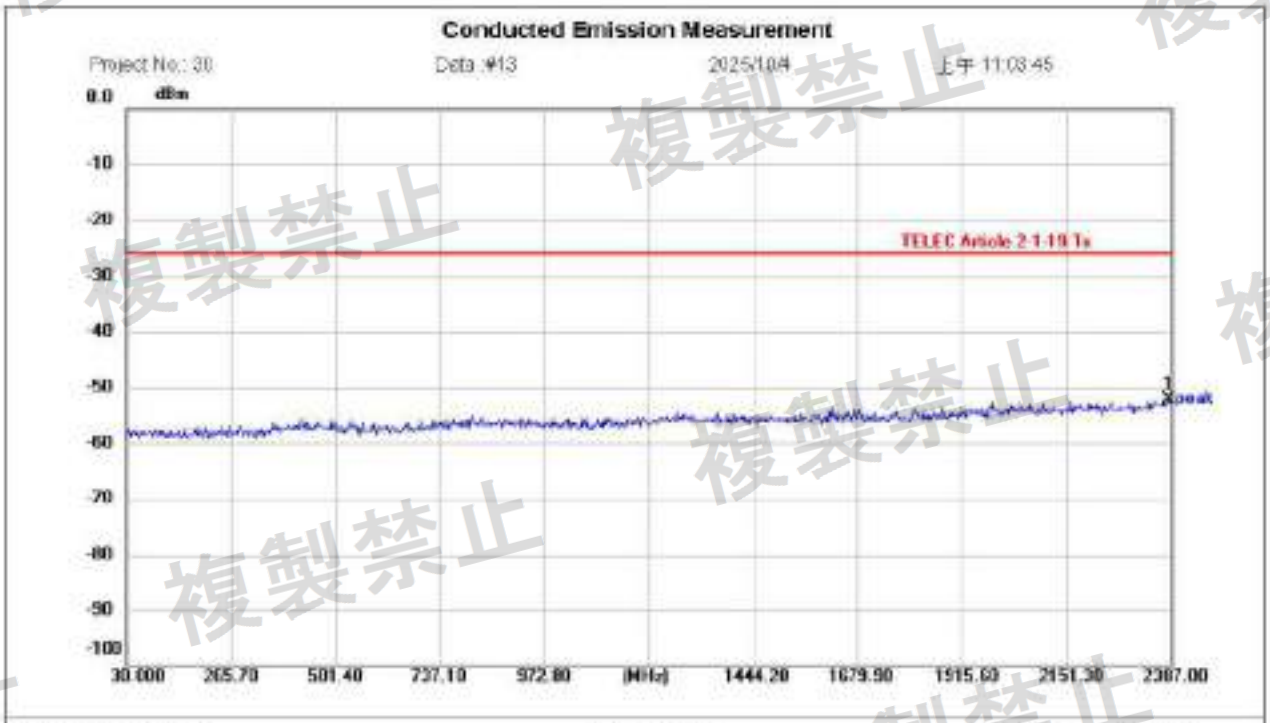


Site: Chamber 04
Limit: TELEC Article 2-1-19 Tx
EUT: W6M22508-24659
M/N:
Mode: Tx BLE 2M CH00
Note:

Polarization:
Power: 3 Vd.c
Distance:

Temperature: 23.9 (°C)
Humidity: 56 %RH

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	2382.286	-62.57	10.36	-52.21	-26.00	-26.21	peak			P	

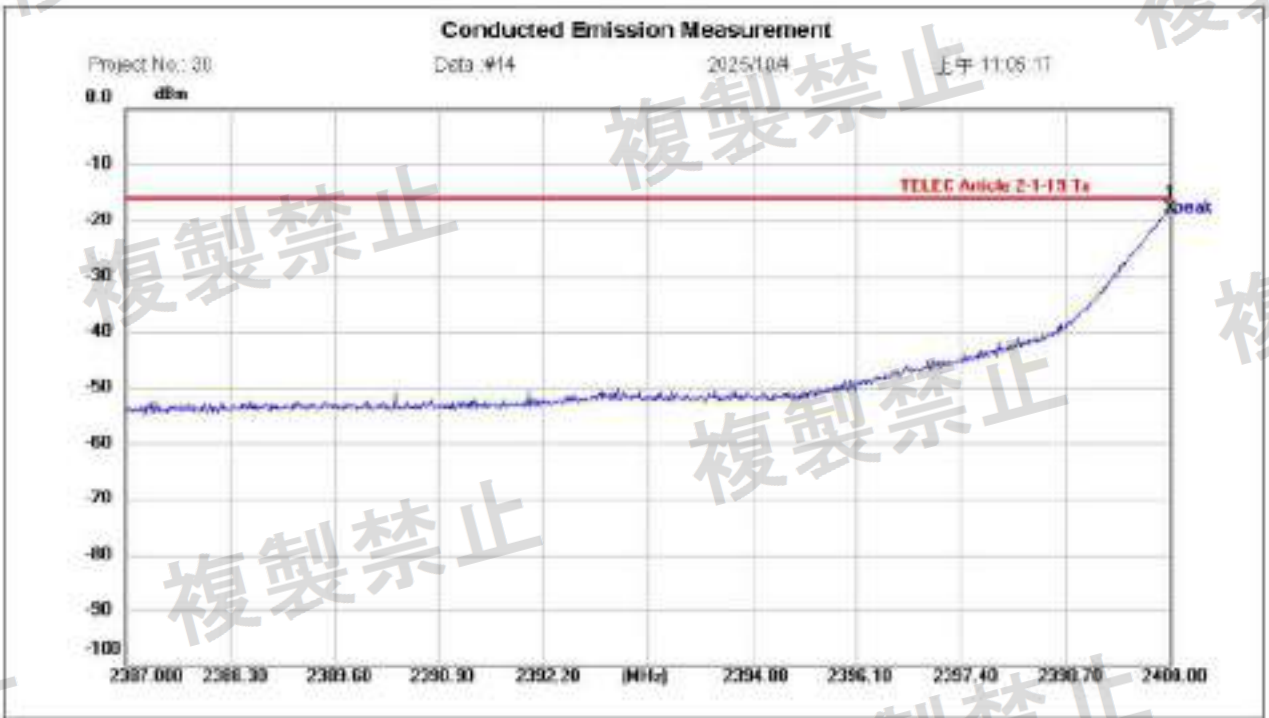


Site: Chamber 04
Limit: TELEC Article 2-1-19 Tx
EUT: W6M22508-24659
M/N:
Mode: Tx BLE 2M CH00
Note:

Polarization:
Power: 3 Vd.c
Distance:

Temperature: 23.9 (°C)
Humidity: 56 %RH

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	2400.000	-28.27	10.36	-17.91	-16.00	-1.91	peak			P	

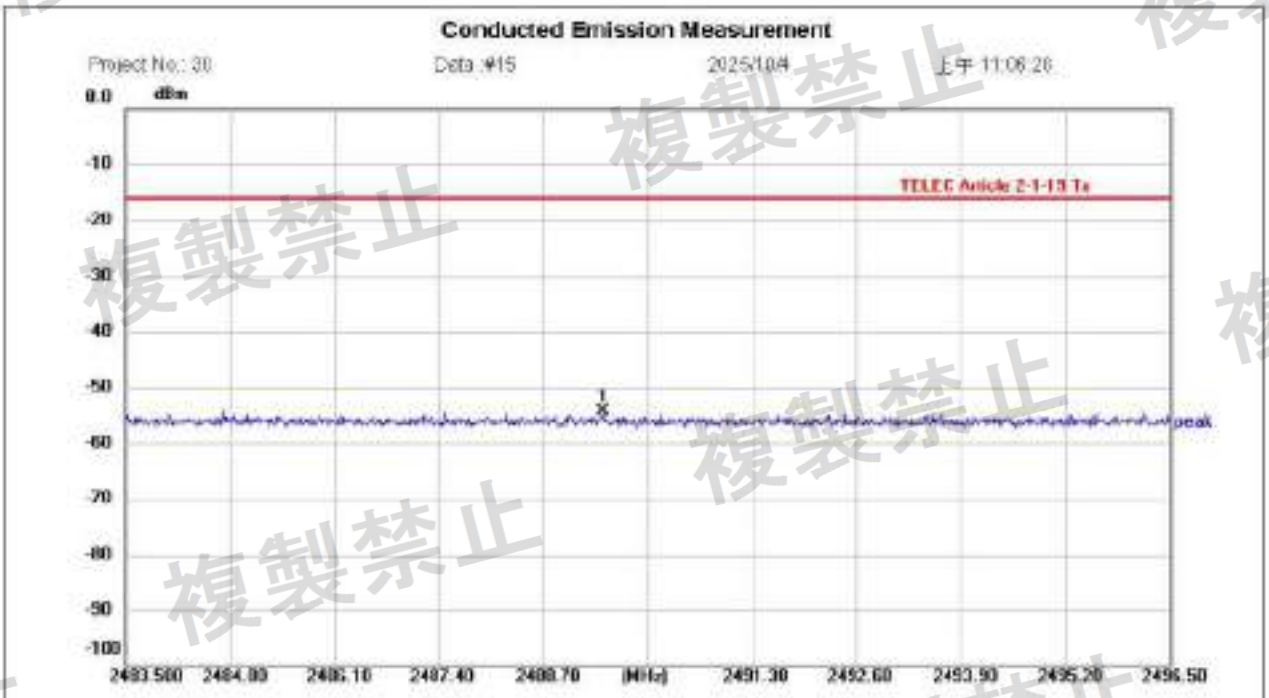


Site: Chamber 04
Limit: TELEC Article 2-1-19 Tx
EUT: W6M22508-24659
M/N:
Mode: Tx BLE 2M CH00
Note:

Polarization:
Power: 3 Vd.c
Distance:

Temperature: 23.9 (°C)
Humidity: 56 %RH

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	2489.454	-64.81	10.36	-54.45	-16.00	-38.45	peak			P	

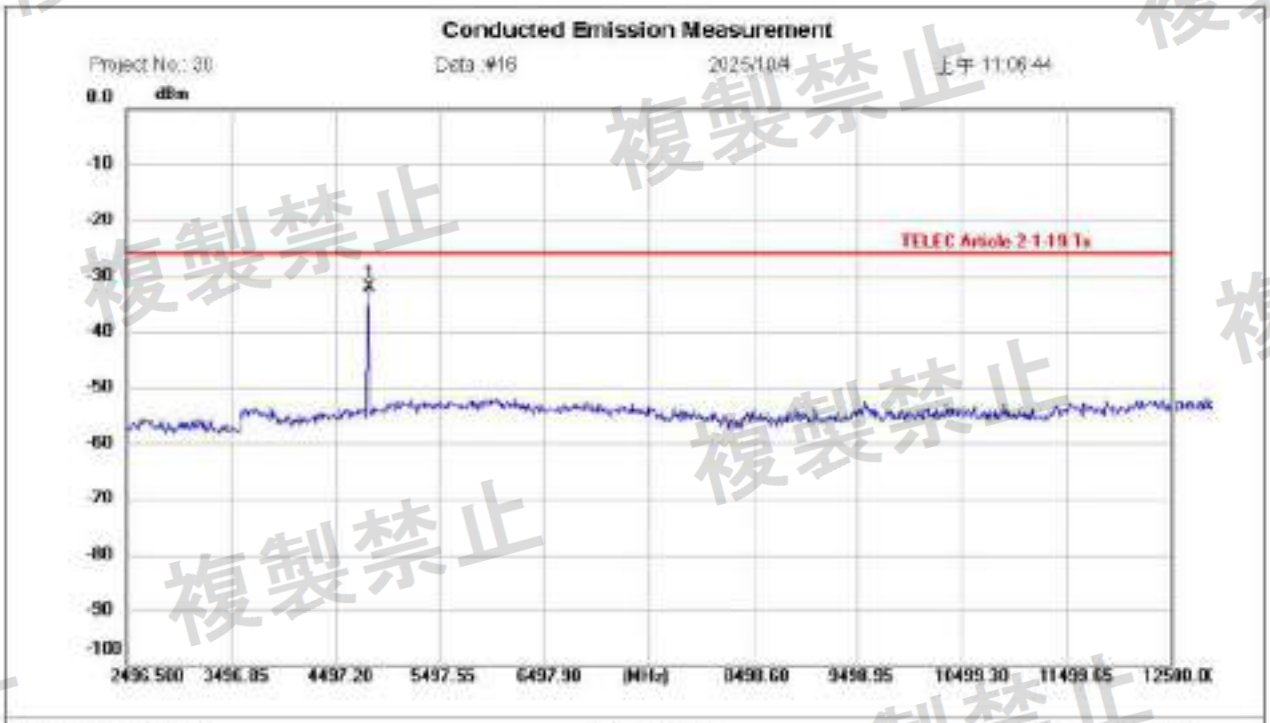


Site: Chamber 04
Limit: TELEC Article 2-1-19 Tx
EUT: W6M22508-24659
M/N:
Mode: Tx BLE 2M CH00
Note:

Polarization:
Power: 3 Vd.c
Distance:

Temperature: 23.9 (°C)
Humidity: 56 %RH

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	4807.309	-42.74	10.60	-32.14	-26.00	-6.14	peak			P	

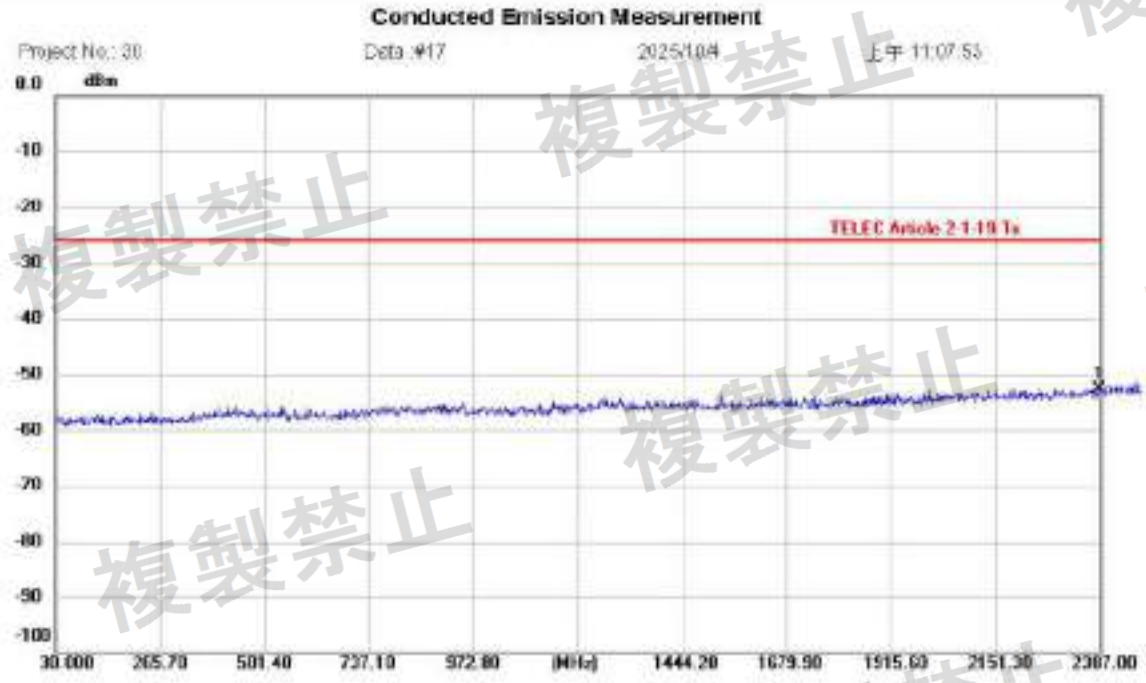


Site: Chamber 04
Limit: TELEC Article 2-1-19 Tx
EUT: W6M22508-24659
M/N:
Mode: Tx BLE 2M CH19
Note:

Polarization:
Power: 3 Vd.c
Distance:

Temperature: 23.9 (°C)
Humidity: 56 %RH

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	2384.643	-62.93	10.36	-52.57	-26.00	-26.57	peak			P	

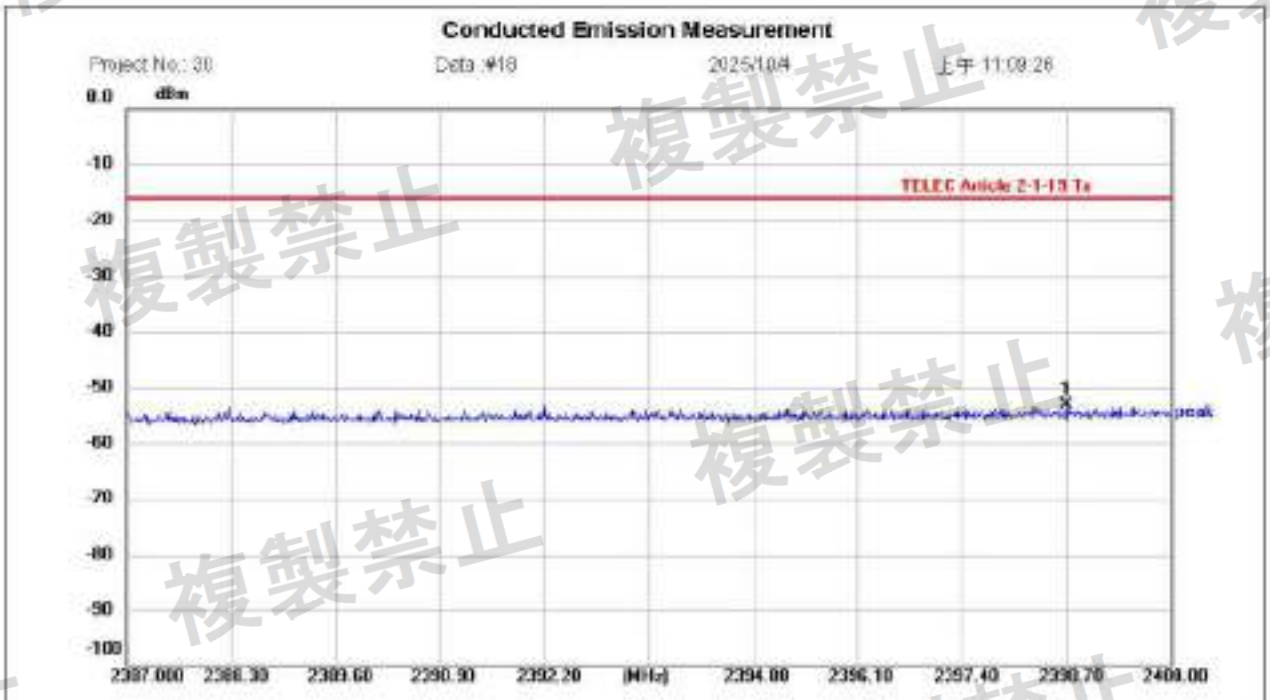


Site: Chamber 04
Limit: TELEC Article 2-1-19 Tx
EUT: W6M22508-24659
M/N:
Mode: Tx BLE 2M CH19
Note:

Polarization:
Power: 3 Vd.c
Distance:

Temperature: 23.9 (°C)
Humidity: 56 %RH

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	2398.713	-63.45	10.36	-53.09	-16.00	-37.09	peak			P	

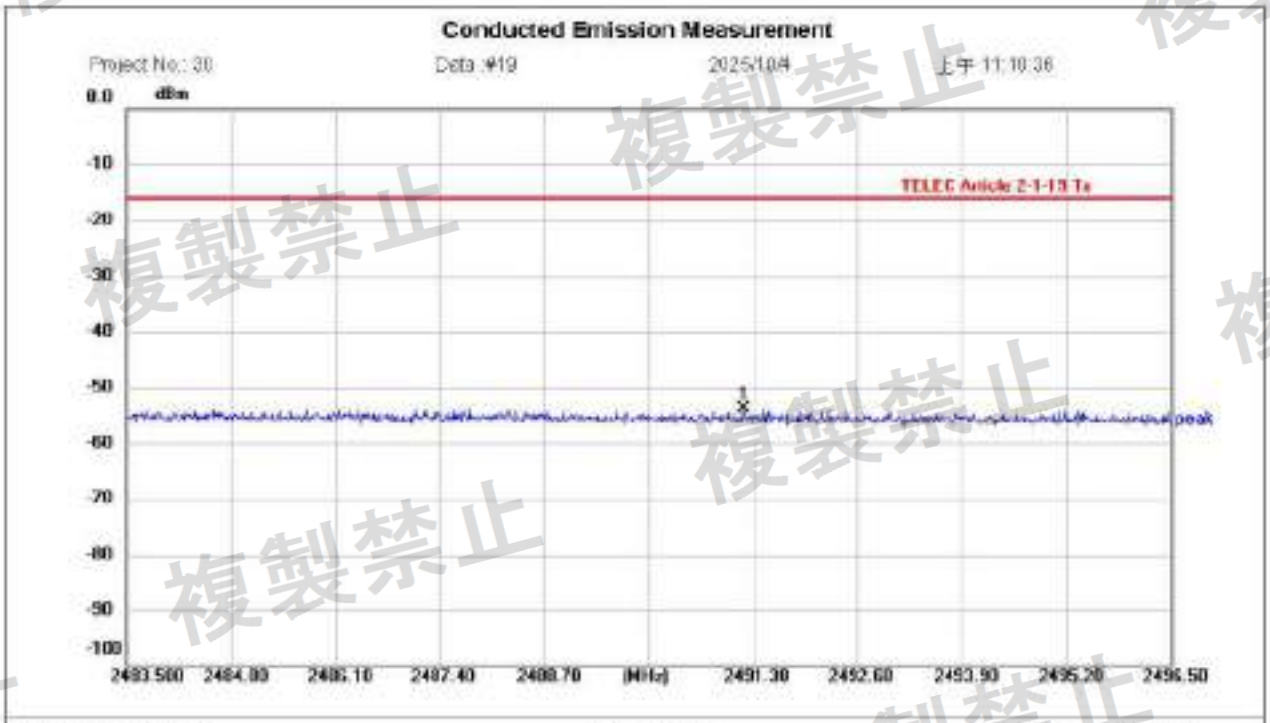


Site: Chamber 04
Limit: TELEC Article 2-1-19 Tx
EUT: W6M22508-24659
M/N:
Mode: Tx BLE 2M CH19
Note:

Polarization:
Power: 3 Vd.c
Distance:

Temperature: 23.9 (°C)
Humidity: 56 %RH

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	2491.183	-64.34	10.36	-53.98	-16.00	-37.98	peak			P	

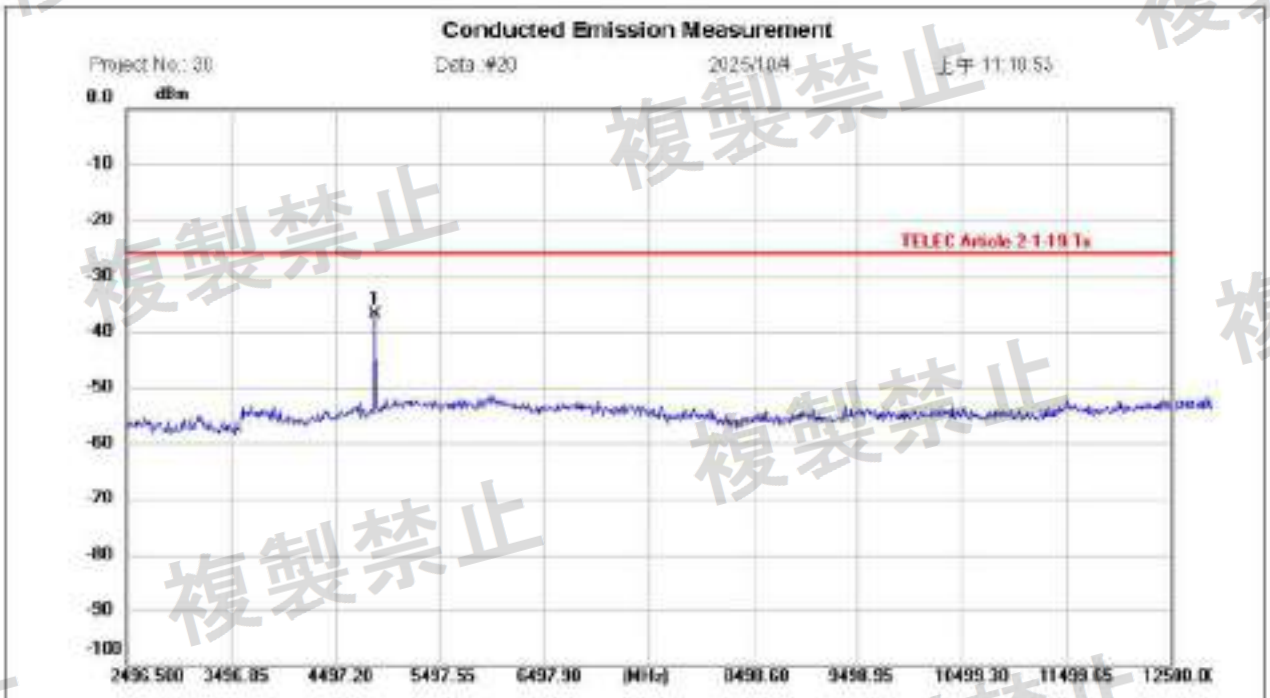


Site: Chamber 04
Limit: TELEC Article 2-1-19 Tx
EUT: W6M22508-24659
M/N:
Mode: Tx BLE 2M CH19
Note:

Polarization:
Power: 3 Vd.c
Distance:

Temperature: 23.9 (°C)
Humidity: 56 %RH

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	4877.333	-47.50	10.57	-36.93	-26.00	-10.93	peak			P	

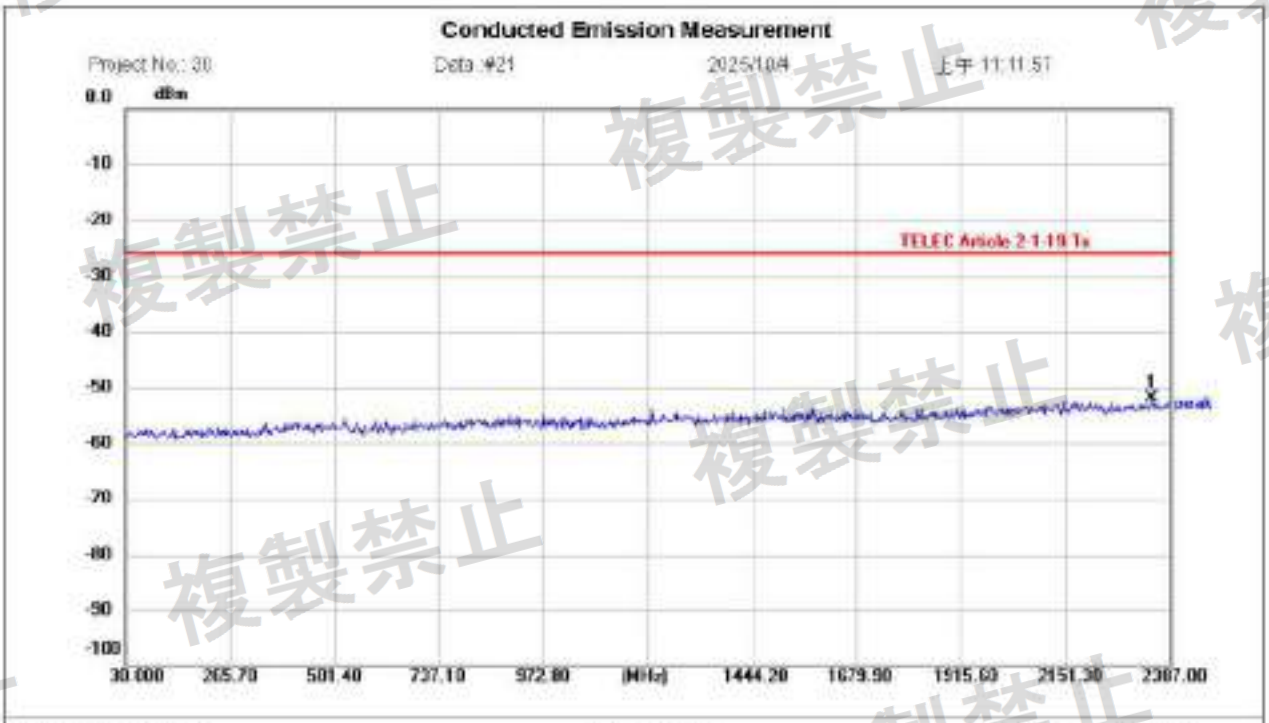


Site: Chamber 04
Limit: TELEC Article 2-1-19 Tx
EUT: W6M22508-24659
M/N:
Mode: Tx BLE 2M CH39
Note:

Polarization:
Power: 3 Vd.c
Distance:

Temperature: 23.9 (°C)
Humidity: 56 %RH

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	2345.931	-62.19	10.35	-51.84	-26.00	-25.84	peak			P	

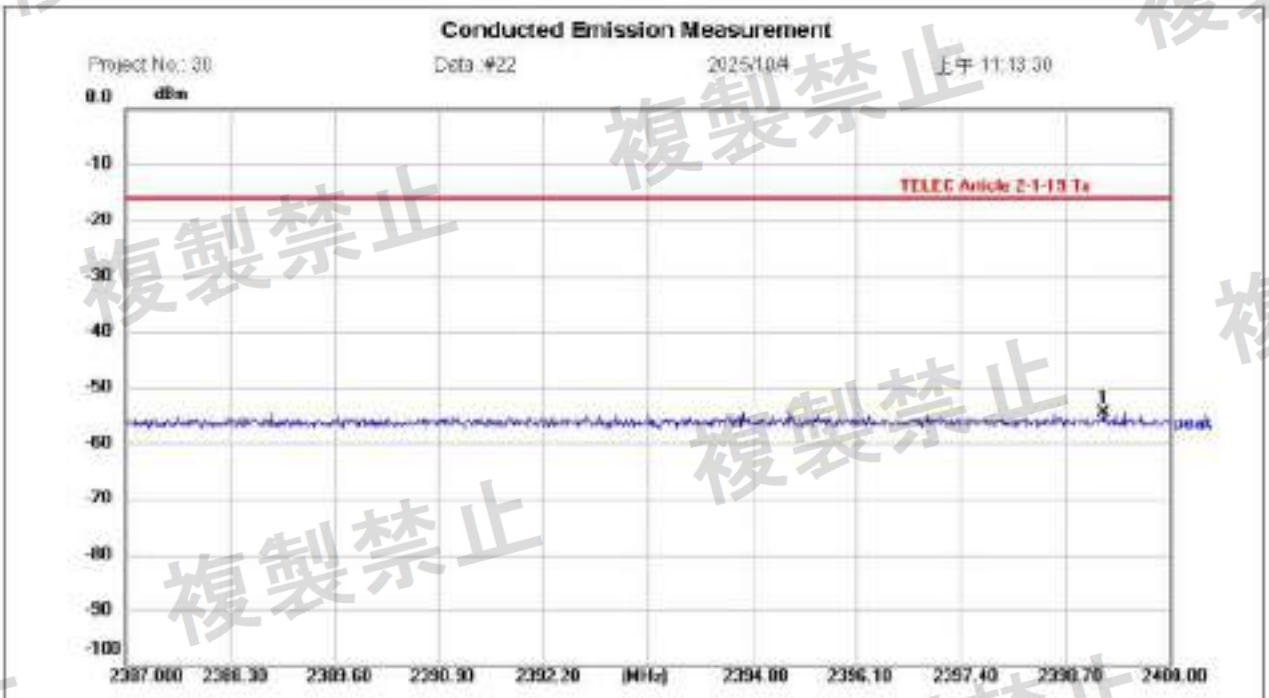


Site: Chamber 04
Limit: TELEC Article 2-1-19 Tx
EUT: W6M22508-24659
M/N:
Mode: Tx BLE 2M CH39
Note:

Polarization:
Power: 3 Vd.c
Distance:

Temperature: 23.9 (°C)
Humidity: 56 %RH

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	2399.168	-64.90	10.36	-54.54	-16.00	-38.54	peak			P	

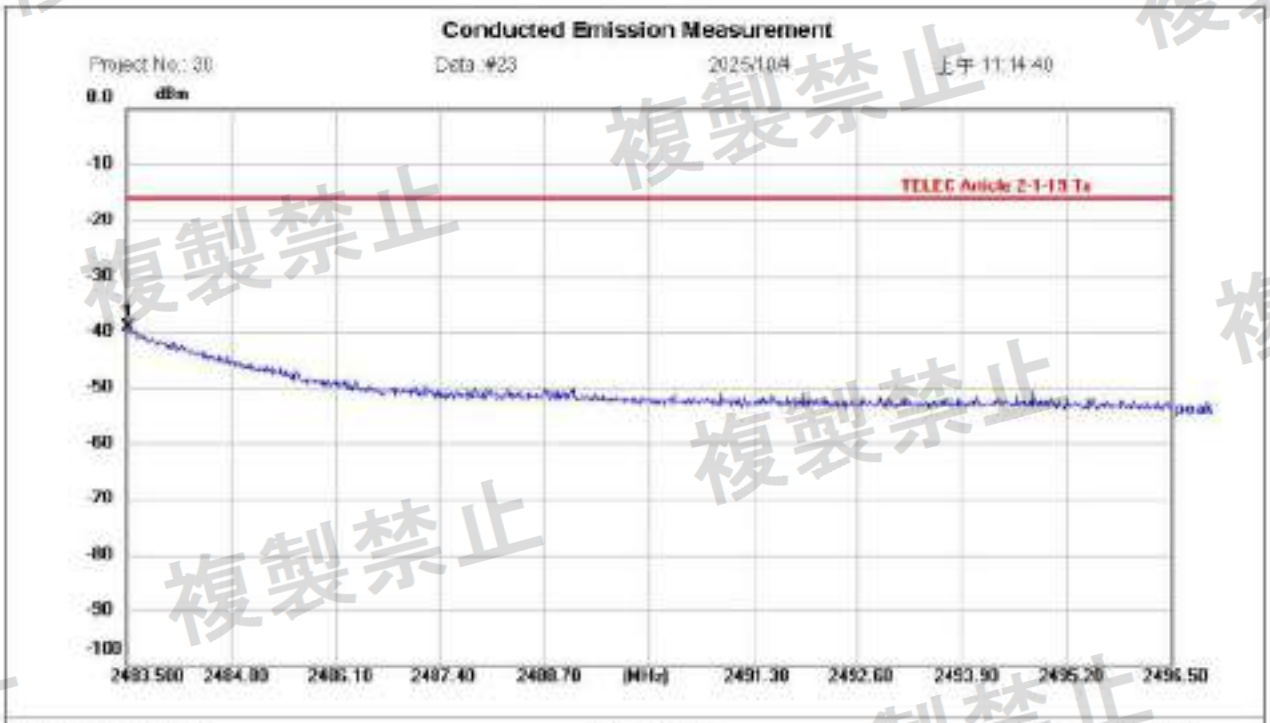


Site: Chamber 04
Limit: TELEC Article 2-1-19 Tx
EUT: W6M22508-24659
M/N:
Mode: Tx BLE 2M CH39
Note:

Polarization:
Power: 3 Vd.c
Distance:

Temperature: 23.9 (°C)
Humidity: 56 %RH

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	2483.526	-49.52	10.36	-39.16	-16.00	-23.16	peak			P	

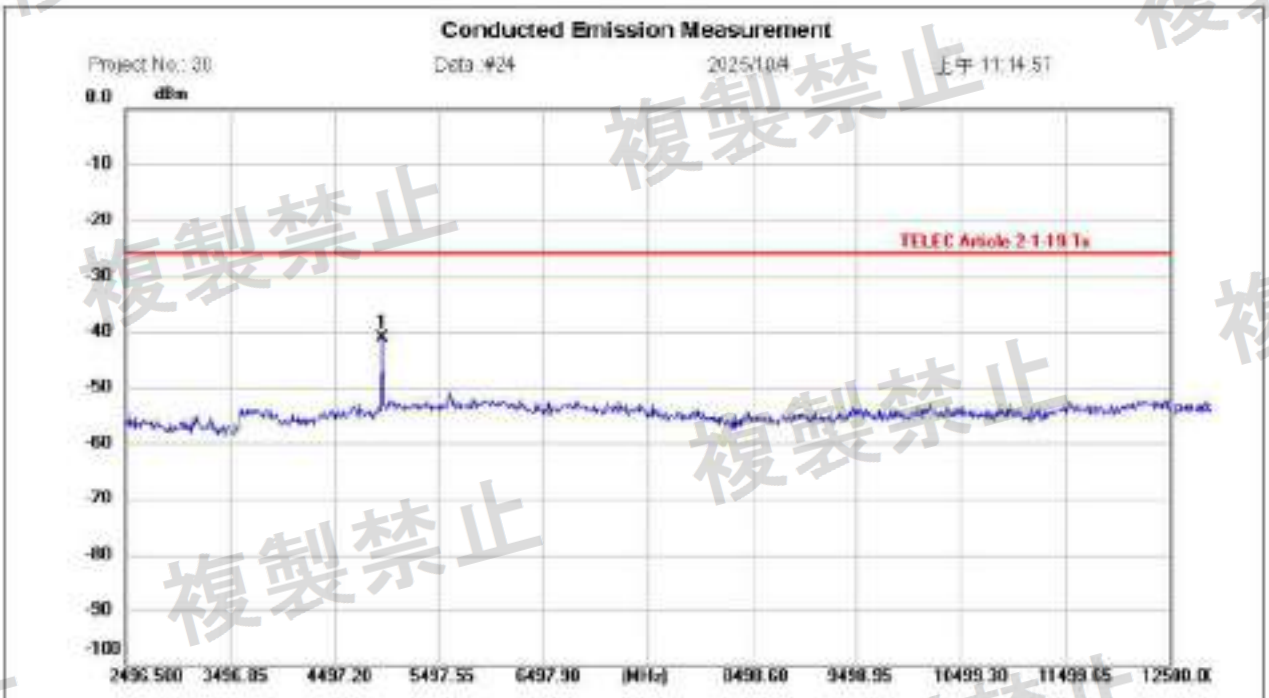


Site: Chamber 04
Limit: TELEC Article 2-1-19 Tx
EUT: W6M22508-24659
M/N:
Mode: Tx BLE 2M CH39
Note:

Polarization:
Power: 3 Vd.c
Distance:

Temperature: 23.9 (°C)
Humidity: 56 %RH

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	4957.361	-51.64	10.61	-41.03	-26.00	-15.03	peak			P	

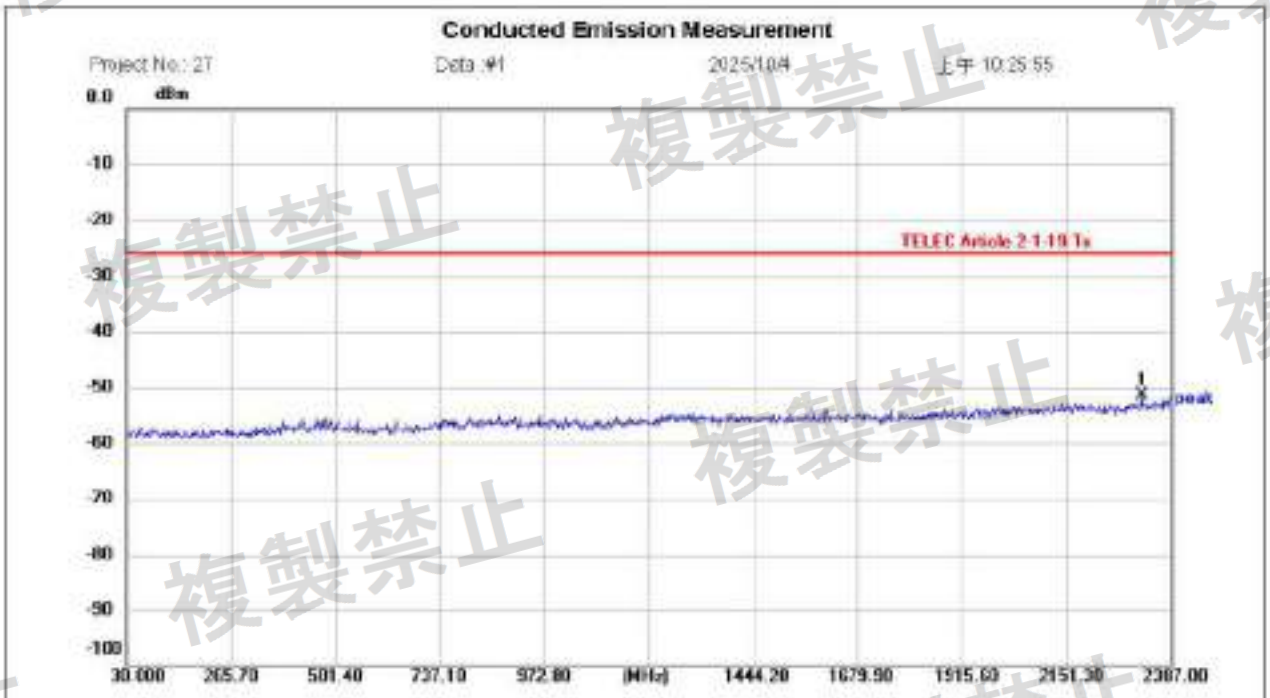


Site: Chamber 04
Limit: TELEC Article 2-1-19 Tx
EUT: W6M22508-24659
M/N:
Mode: Tx BLE 1M CH00
Note:

Polarization:
Power: 3.7 Volt
Distance:

Temperature: 23.9 (°C)
Humidity: 56 %RH

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	2321.004	-61.69	10.34	-51.35	-26.00	-25.35	peak			P	

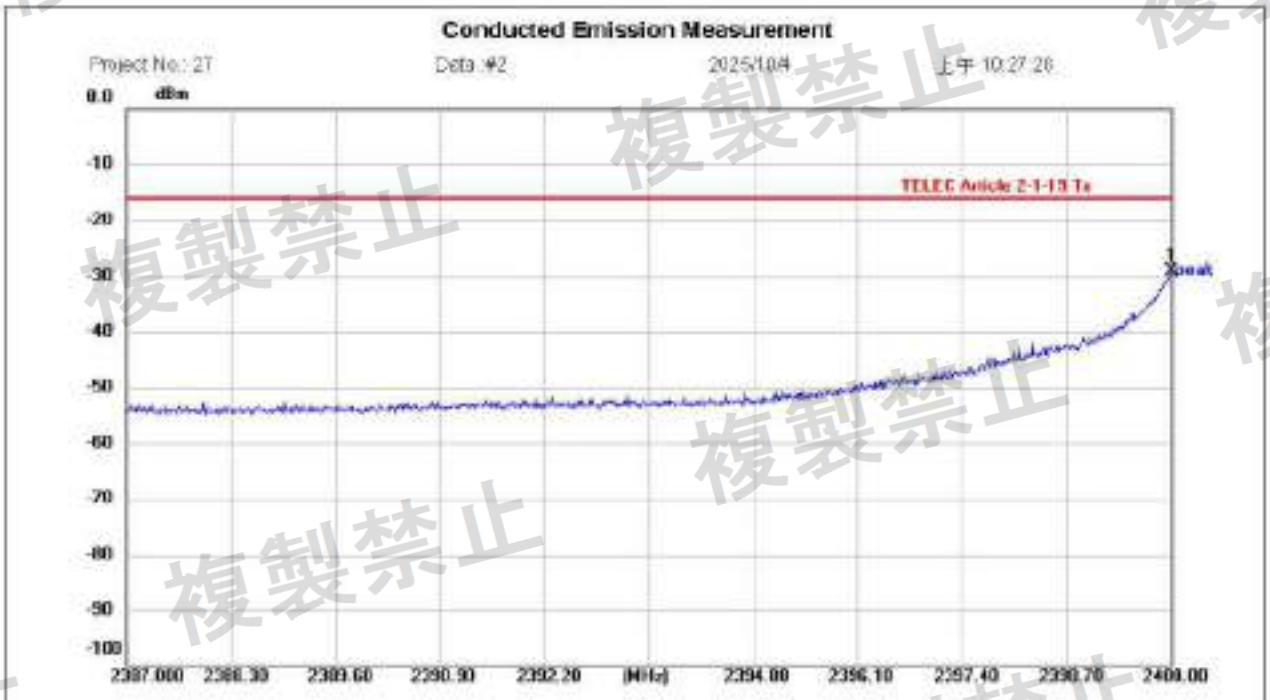


Site: Chamber 04
Limit: TELEC Article 2-1-19 Tx
EUT: W6M22508-24659
M/N:
Mode: Tx BLE 1M CH00
Note:

Polarization:
Power: 3.7 Volt
Distance:

Temperature: 23.9 (°C)
Humidity: 56 %RH

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	2400.000	-39.38	10.36	-29.02	-16.00	-13.02	peak			P	

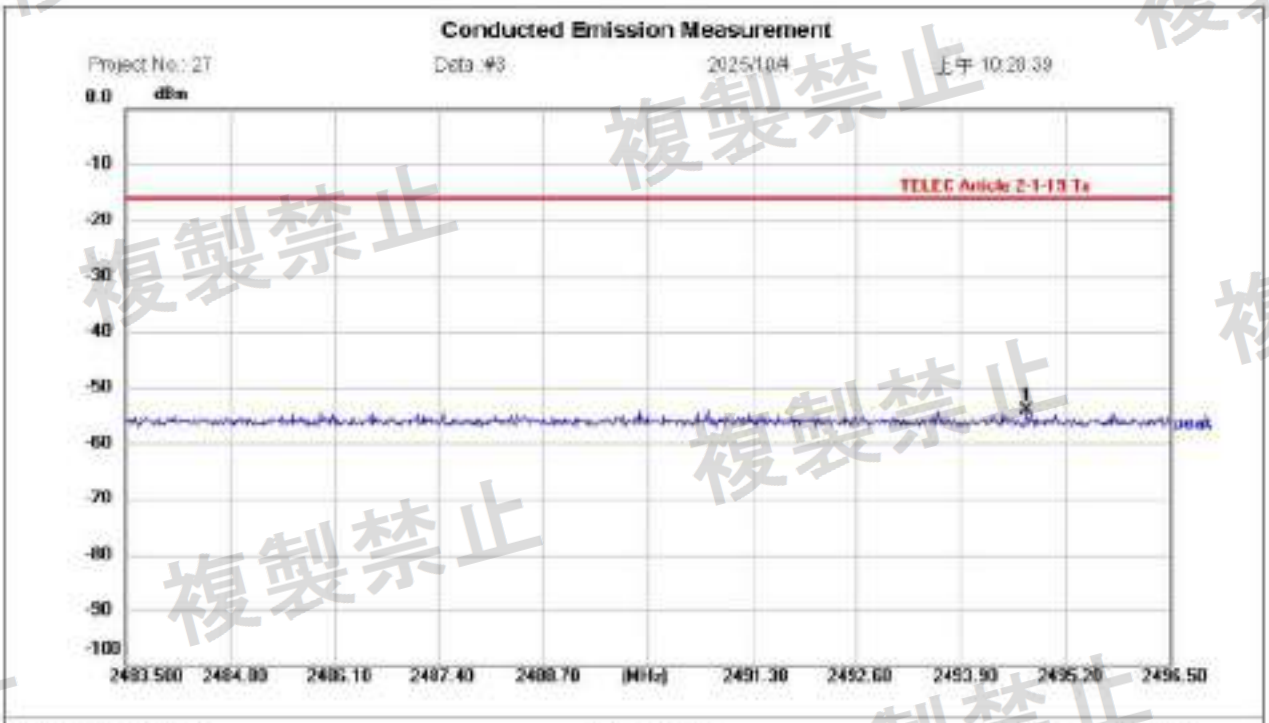


Site: Chamber 04
Limit: TELEC Article 2-1-19 Tx
EUT: W6M22508-24659
M/N:
Mode: Tx BLE 1M CH00
Note:

Polarization:
Power: 3.7 Volt
Distance:

Temperature: 23.9 (°C)
Humidity: 56 %RH

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	2494.719	-64.50	10.36	-54.14	-16.00	-38.14	peak			P	

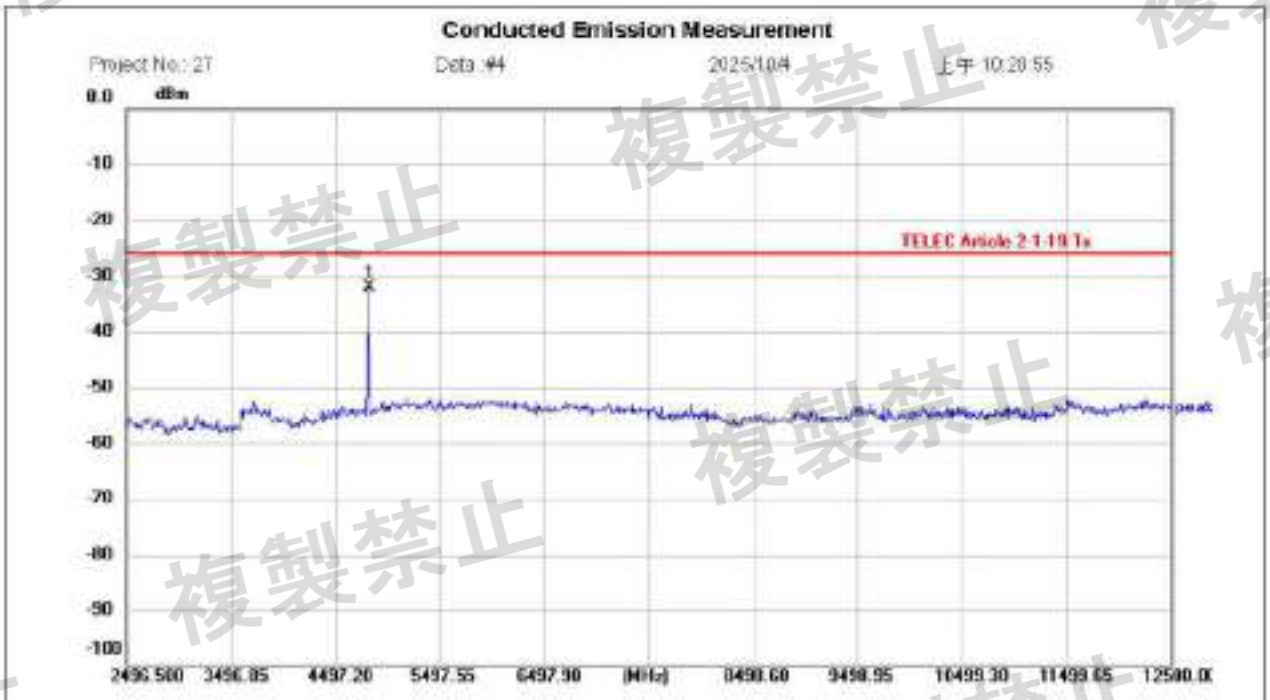


Site: Chamber 04
Limit: TELEC Article 2-1-19 Tx
EUT: W6M22508-24659
M/N:
Mode: Tx BLE 1M CH00
Note:

Polarization:
Power: 3.7 Volt
Distance:

Temperature: 23.9 (°C)
Humidity: 56 %RH

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	4807.309	-42.72	10.60	-32.12	-26.00	-6.12	peak			P	

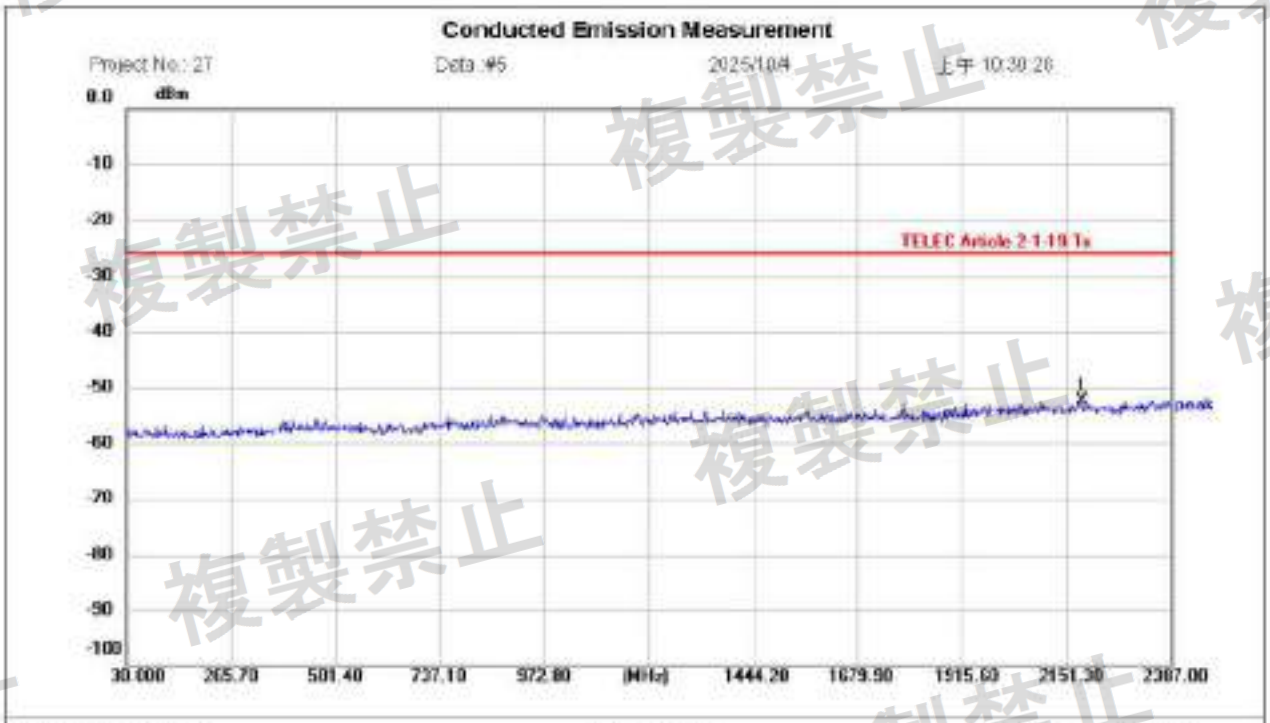


Site: Chamber 04
Limit: TELEC Article 2-1-19 Tx
EUT: W6M22508-24659
M/N:
Mode: Tx BLE 1M CH19
Note:

Polarization:
Power: 3.7 Volt
Distance:

Temperature: 23.9 (°C)
Humidity: 56 %RH

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	2186.655	-62.59	10.34	-52.25	-26.00	-26.25	peak			P	

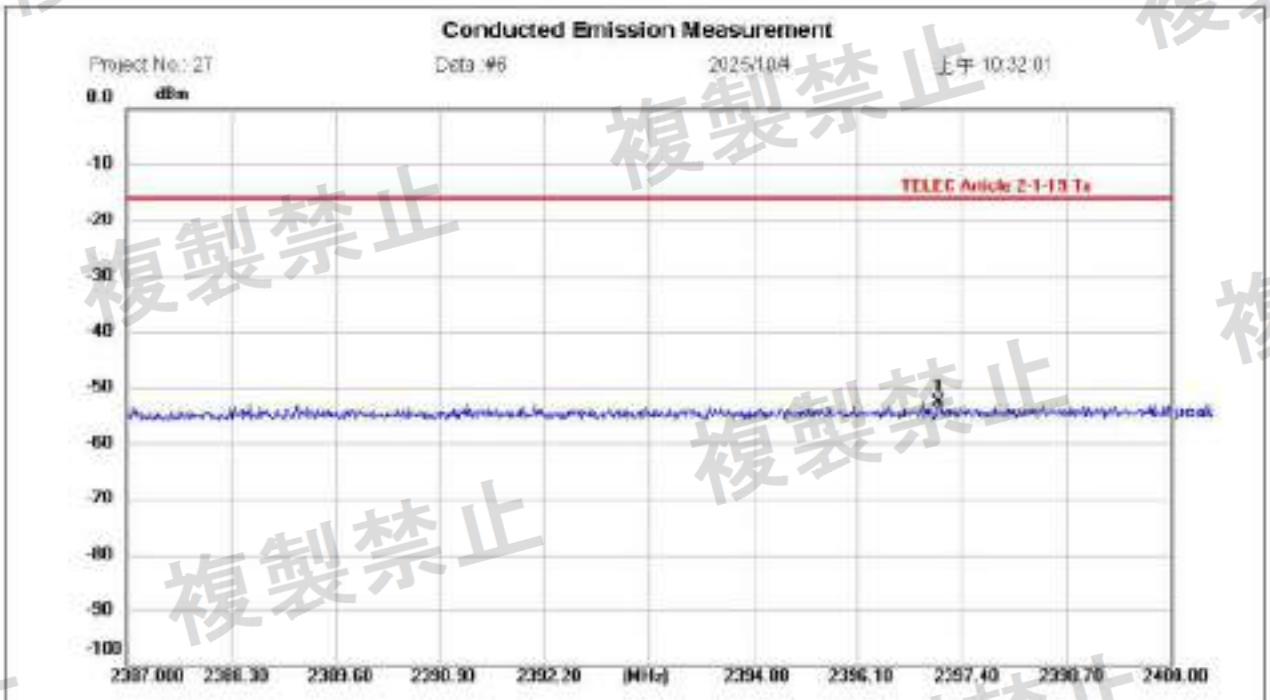


Site: Chamber 04
Limit: TELEC Article 2-1-19 Tx
EUT: W6M22508-24659
M/N:
Mode: Tx BLE 1M CH19
Note:

Polarization:
Power: 3.7 Volt
Distance:

Temperature: 23.9 (°C)
Humidity: 56 %RH

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	2397.114	-63.01	10.36	-52.65	-16.00	-36.65	peak			P	

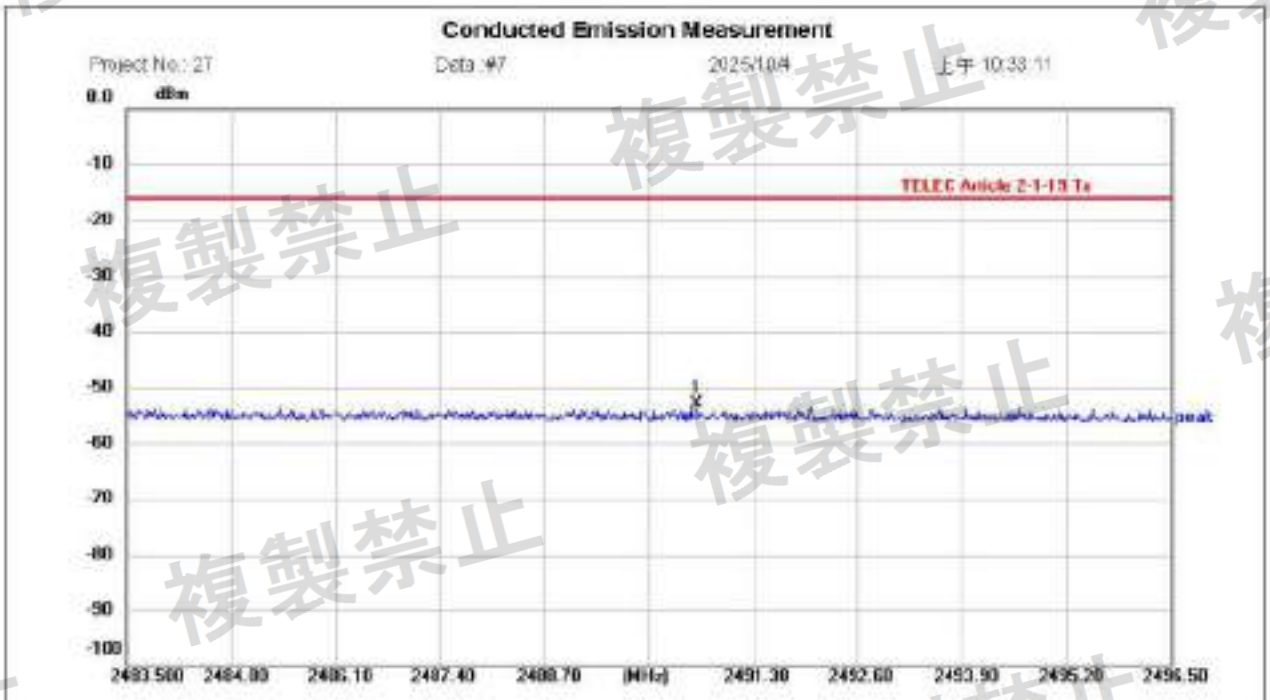


Site: Chamber 04
Limit: TELEC Article 2-1-19 Tx
EUT: W6M22508-24659
M/N:
Mode: Tx BLE 1M CH19
Note:

Polarization:
Power: 3.7 Volt
Distance:

Temperature: 23.9 (°C)
Humidity: 56 %RH

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	2490.598	-63.29	10.36	-52.93	-16.00	-36.93	peak			P	

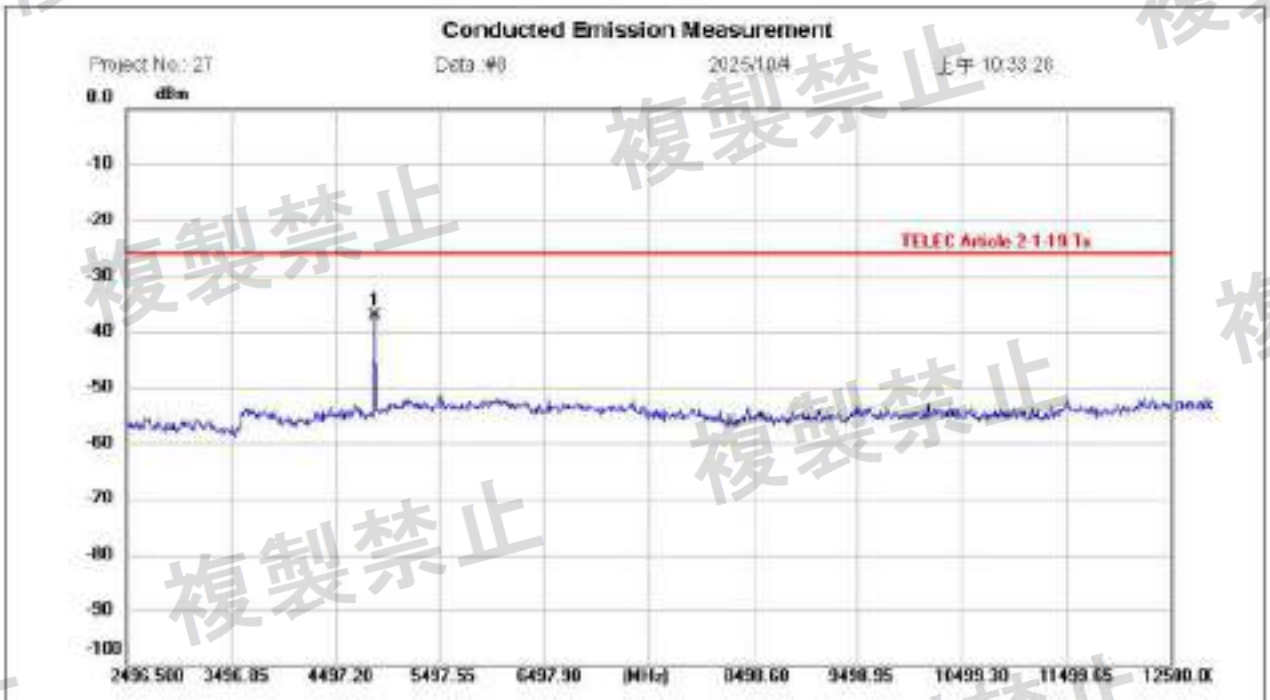


Site: Chamber 04
Limit: TELEC Article 2-1-19 Tx
EUT: W6M22508-24659
M/N:
Mode: Tx BLE 1M CH19
Note:

Polarization:
Power: 3.7 Volt
Distance:

Temperature: 23.9 (°C)
Humidity: 56 %RH

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	4877.333	-47.61	10.57	-37.04	-26.00	-11.04	peak			P	

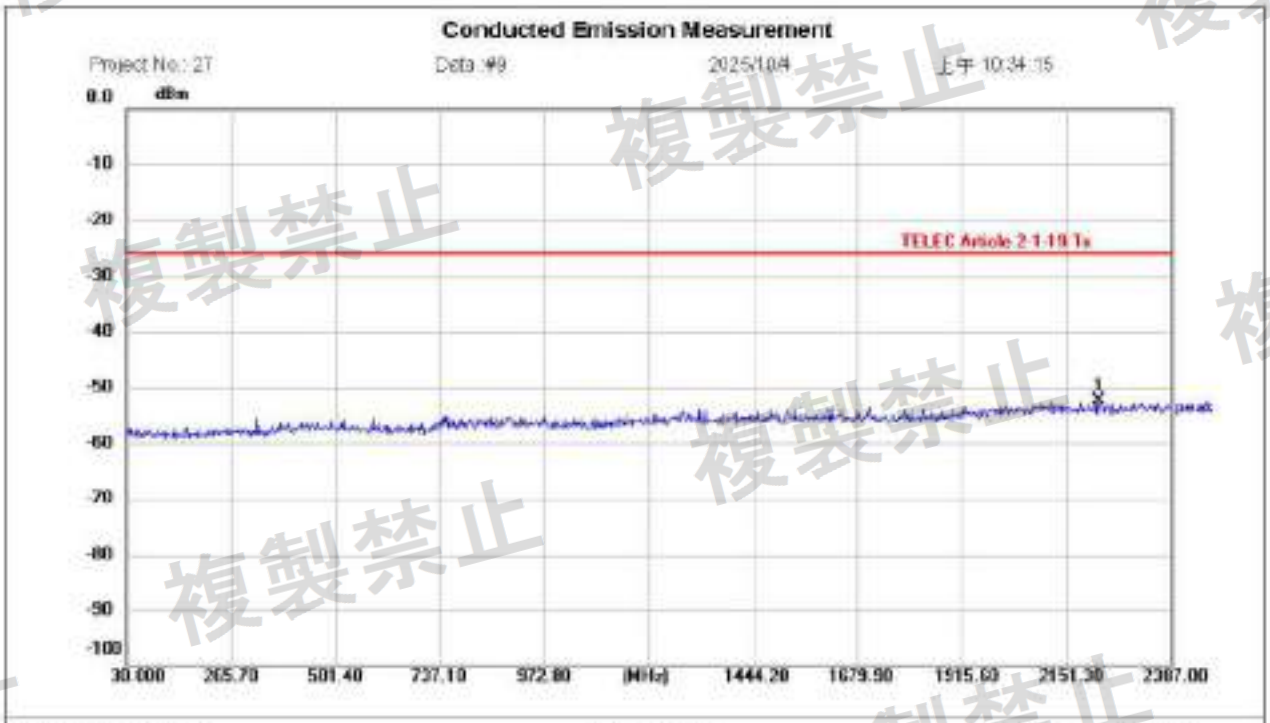


Site: Chamber 04
Limit: TELEC Article 2-1-19 Tx
EUT: W6M22508-24659
M/N:
Mode: Tx BLE 1M CH39
Note:

Polarization:
Power: 3.7 Volt
Distance:

Temperature: 23.9 (°C)
Humidity: 56 %RH

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	2224.367	-62.65	10.34	-52.31	-26.00	-26.31	peak			P	

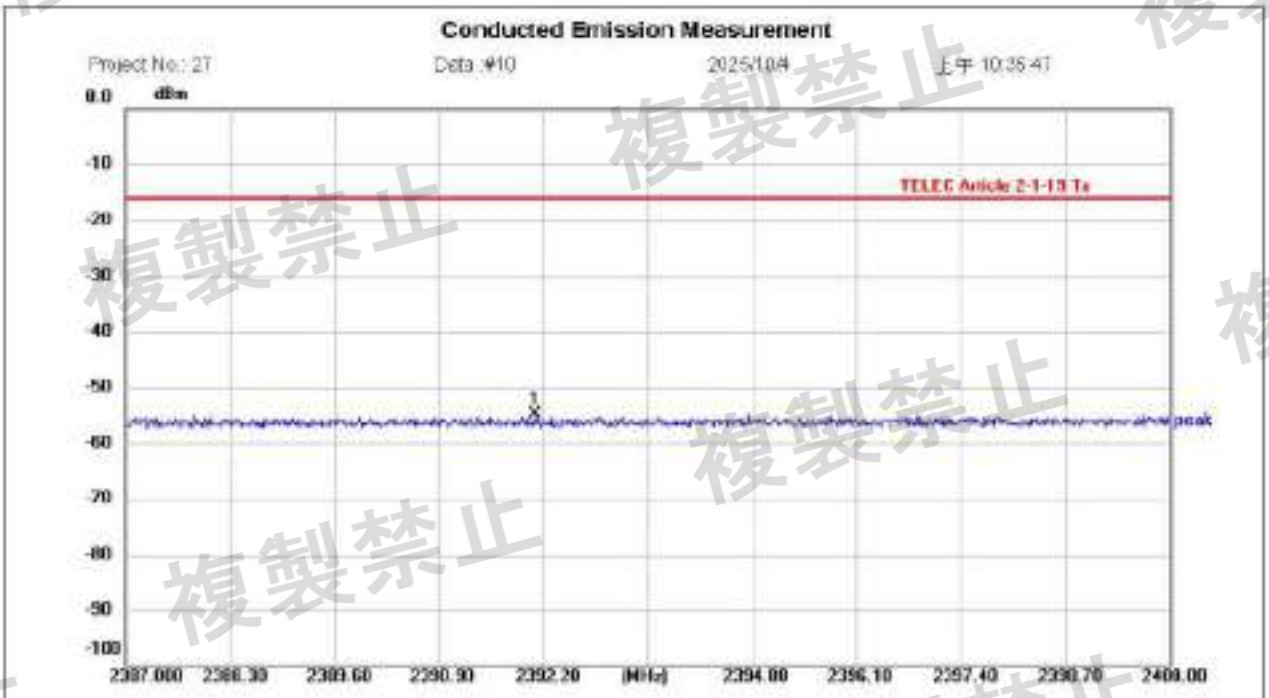


Site: Chamber 04
Limit: TELEC Article 2-1-19 Tx
EUT: W6M22508-24659
M/N:
Mode: Tx BLE 1M CH39
Note:

Polarization:
Power: 3.7 Volt
Distance:

Temperature: 23.9 (°C)
Humidity: 56 %RH

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	2392.096	-65.11	10.36	-54.75	-16.00	-38.75	peak			P	

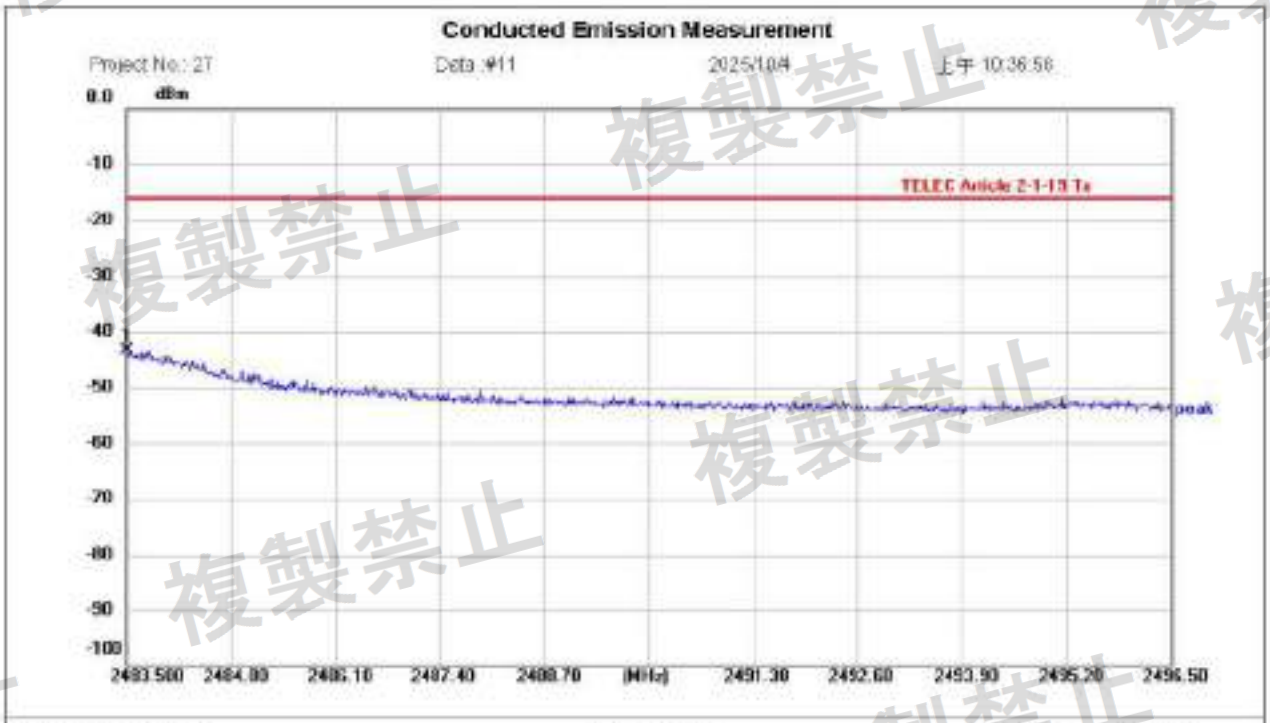


Site: Chamber 04
Limit: TELEC Article 2-1-19 Tx
EUT: W6M22508-24659
M/N:
Mode: Tx BLE 1M CH39
Note:

Polarization:
Power: 3.7 Volt
Distance:

Temperature: 23.9 (°C)
Humidity: 56 %RH

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	2483.513	-53.74	10.36	-43.38	-16.00	-27.38	peak			P	

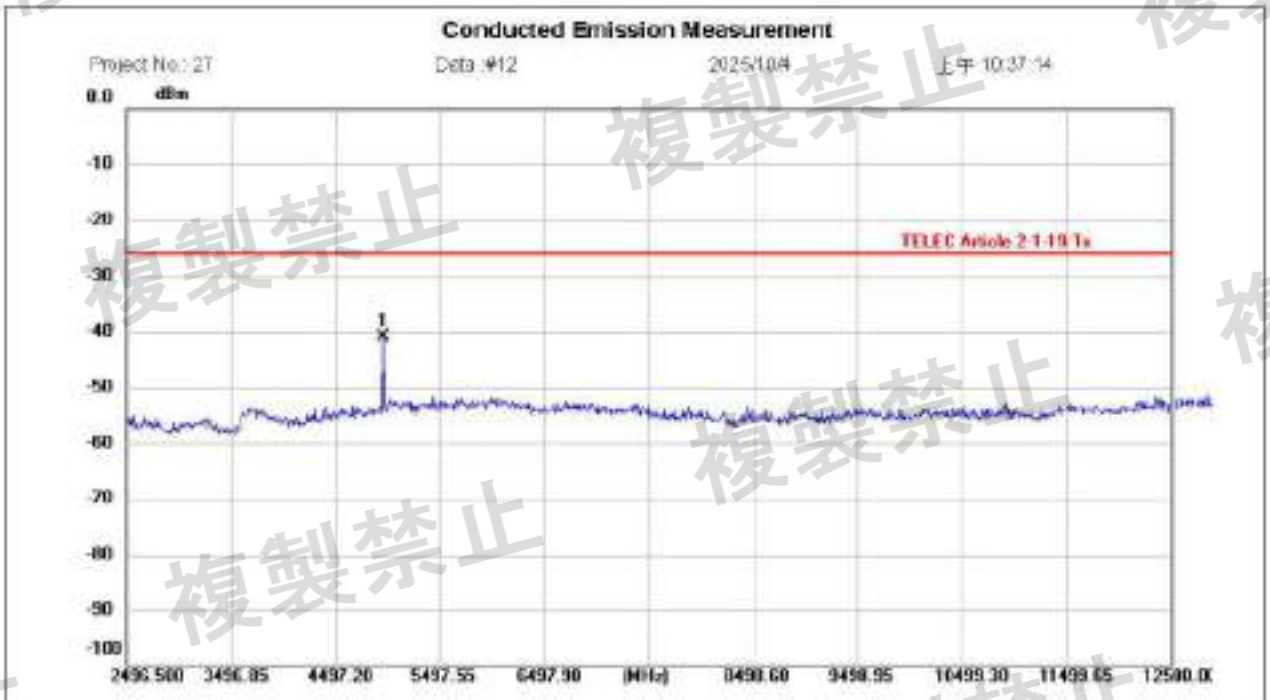


Site: Chamber 04
Limit: TELEC Article 2-1-19 Tx
EUT: W6M22508-24659
M/N:
Mode: Tx BLE 1M CH39
Note:

Polarization:
Power: 3.7 Volt
Distance:

Temperature: 23.9 (°C)
Humidity: 56 %RH

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	4957.361	-51.50	10.61	-40.89	-26.00	-14.89	peak			P	

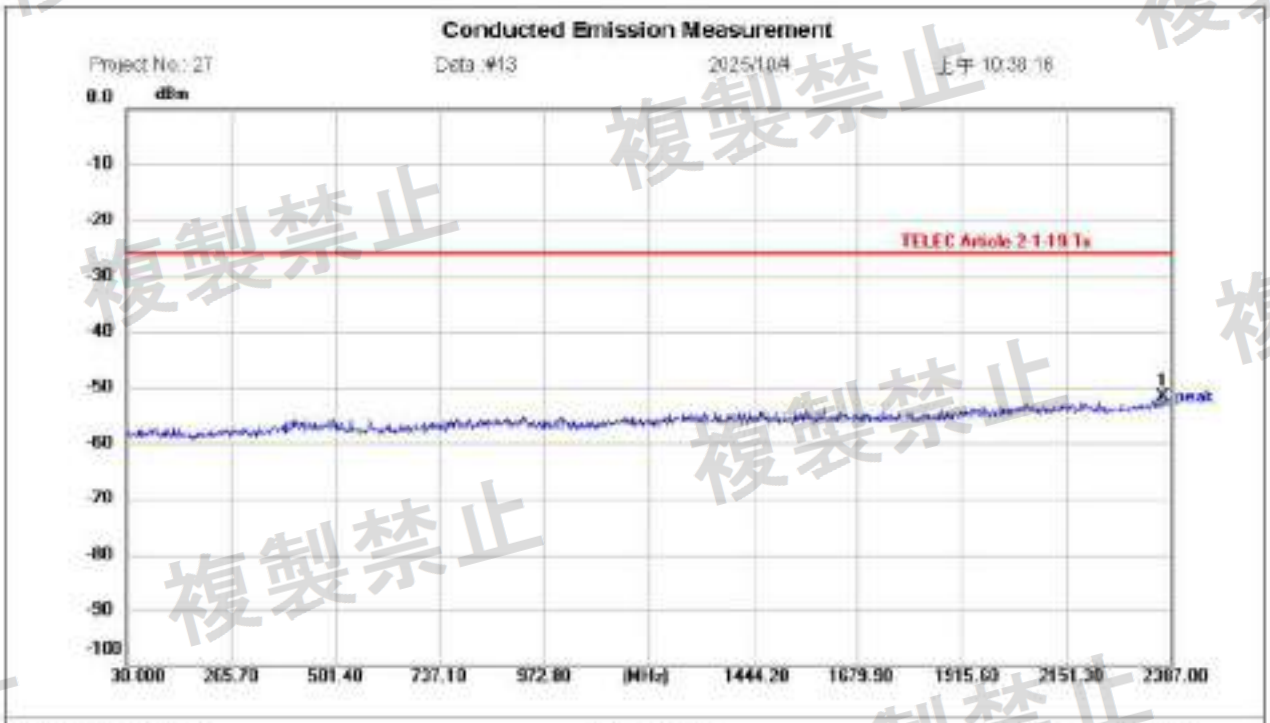


Site: Chamber 04
Limit: TELEC Article 2-1-19 Tx
EUT: W6M22508-24659
M/N:
Mode: Tx BLE 2M CH00
Note:

Polarization:
Power: 3.7 Volt
Distance:

Temperature: 23.9 (°C)
Humidity: 56 %RH

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	2365.787	-61.95	10.35	-51.60	-26.00	-25.60	peak			P	

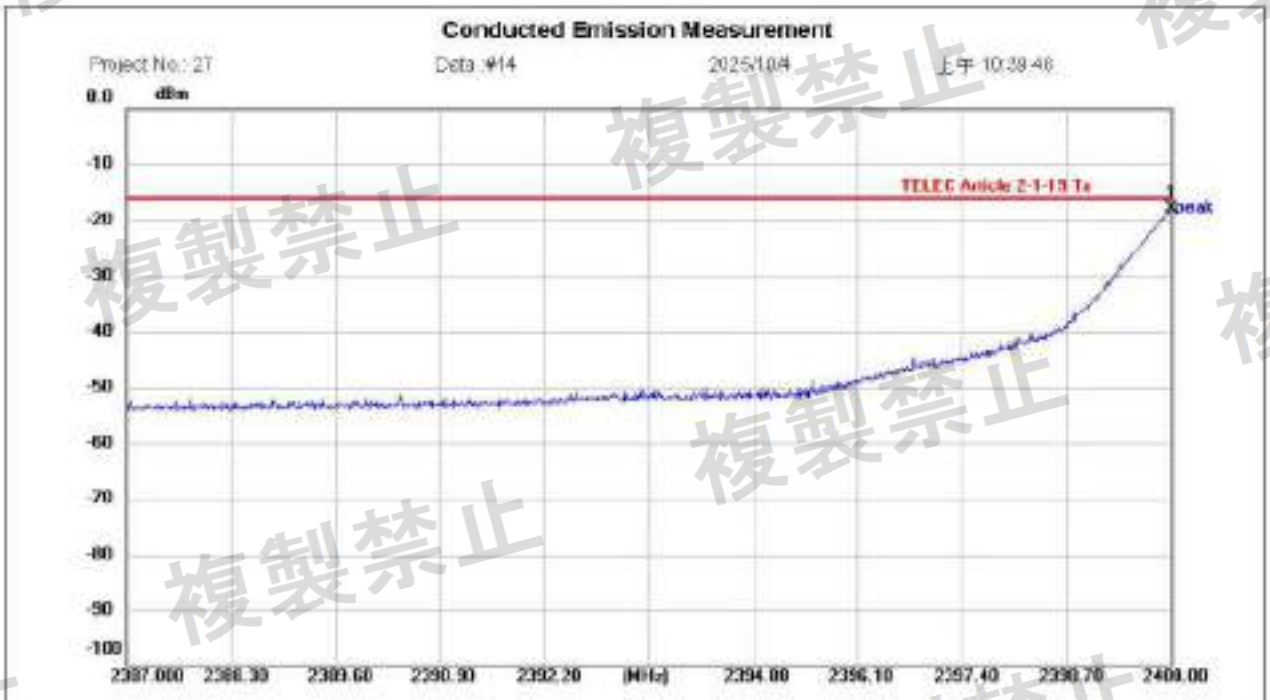


Site: Chamber 04
Limit: TELEC Article 2-1-19 Tx
EUT: W6M22508-24659
M/N:
Mode: Tx BLE 2M CH00
Note:

Polarization:
Power: 3.7 Volt
Distance:

Temperature: 23.9 (°C)
Humidity: 56 %RH

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	2400.000	-28.25	10.36	-17.89	-16.00	-1.89	peak			P	

複製禁止

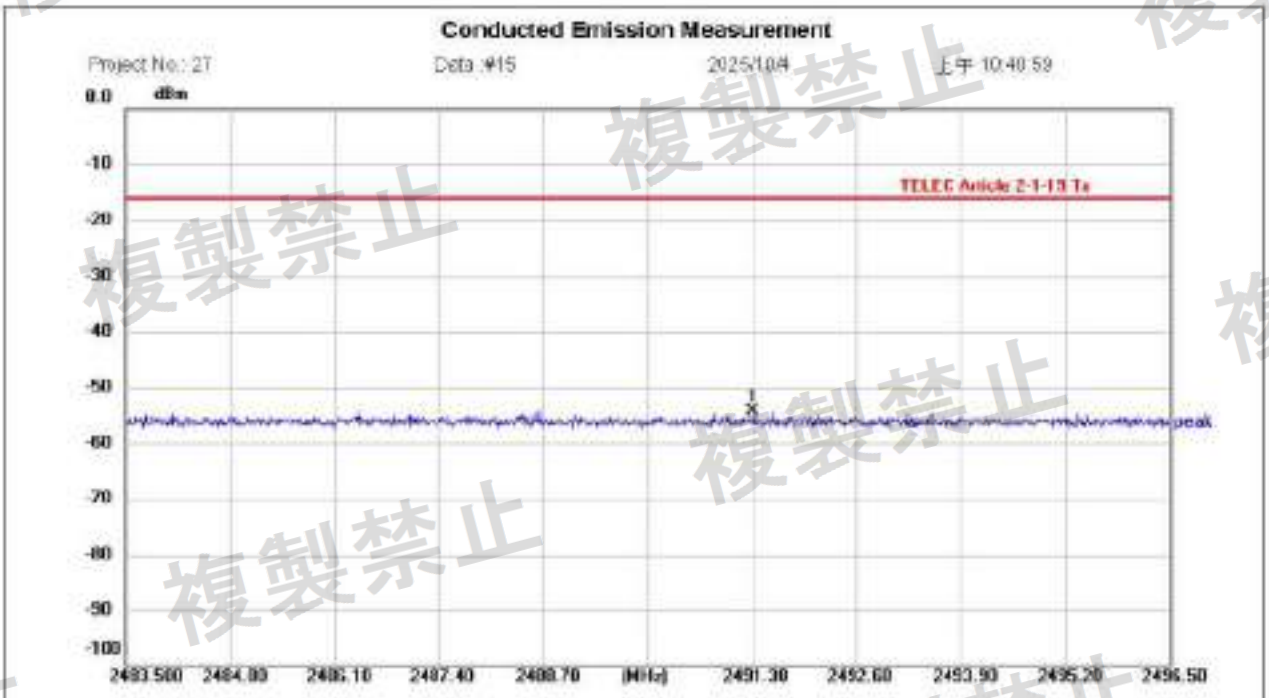


Site: Chamber 04
Limit: TELEC Article 2-1-19 Tx
EUT: W6M22508-24659
M/N:
Mode: Tx BLE 2M CH00
Note:

Polarization:
Power: 3.7 Volt
Distance:

Temperature: 23.9 (°C)
Humidity: 56 %RH

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	2491.313	-64.72	10.36	-54.36	-16.00	-38.36	peak			P	

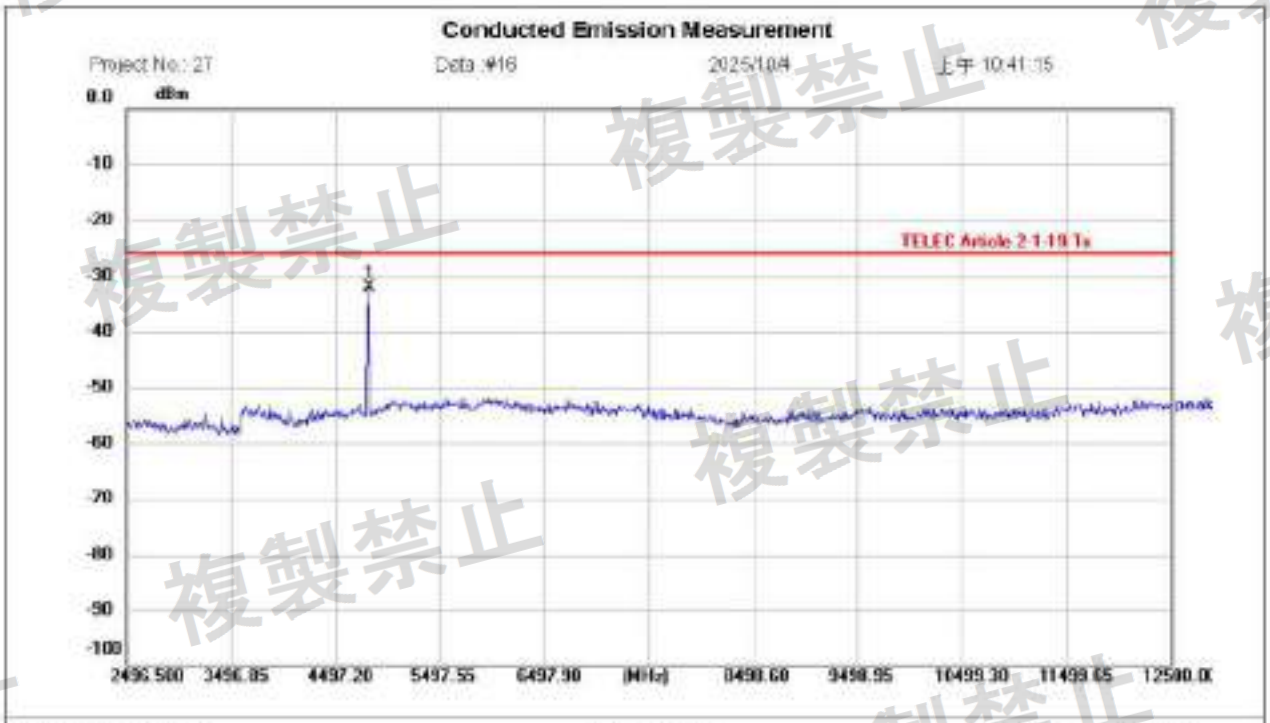


Site: Chamber 04
Limit: TELEC Article 2-1-19 Tx
EUT: W6M22508-24659
M/N:
Mode: Tx BLE 2M CH00
Note:

Polarization:
Power: 3.7 Volt
Distance:

Temperature: 23.9 (°C)
Humidity: 56 %RH

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	4807.309	-42.80	10.60	-32.20	-26.00	-6.20	peak			P	

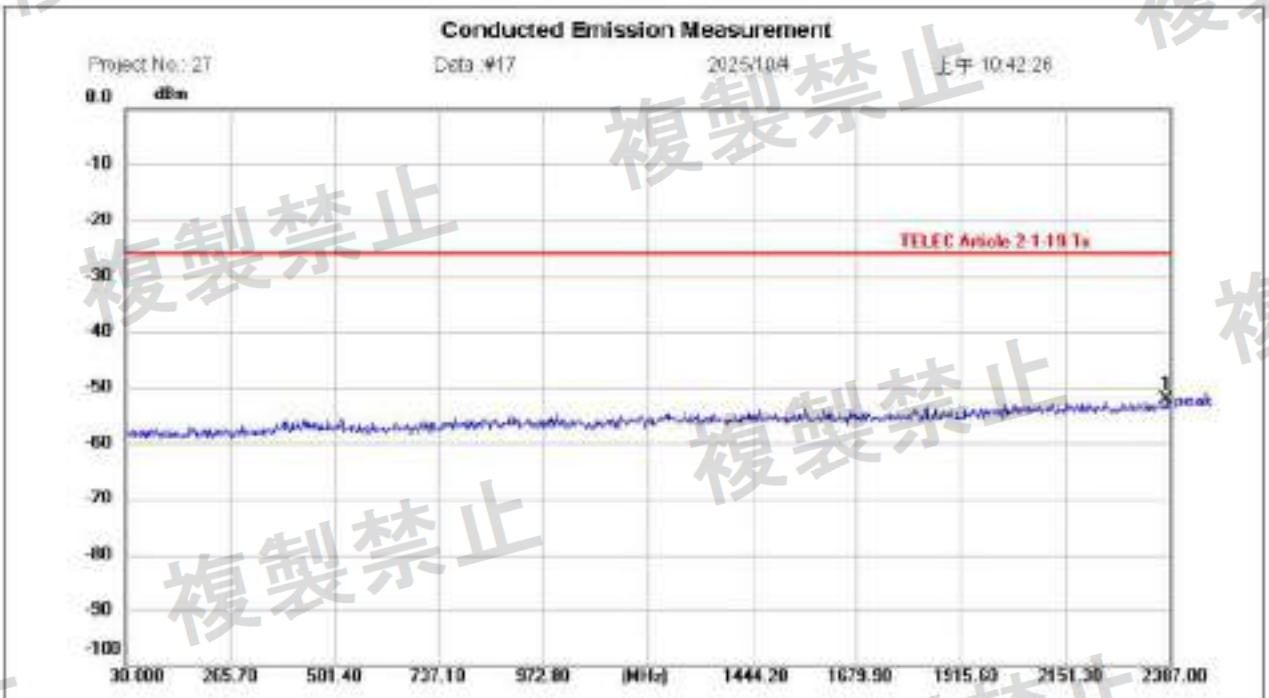


Site: Chamber 04
Limit: TELEC Article 2-1-19 Tx
EUT: W6M22508-24659
M/N:
Mode: Tx BLE 2M CH19
Note:

Polarization:
Power: 3.7 Volt
Distance:

Temperature: 23.9 (°C)
Humidity: 56 %RH

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	2379.929	-62.59	10.36	-52.23	-26.00	-26.23	peak			P	

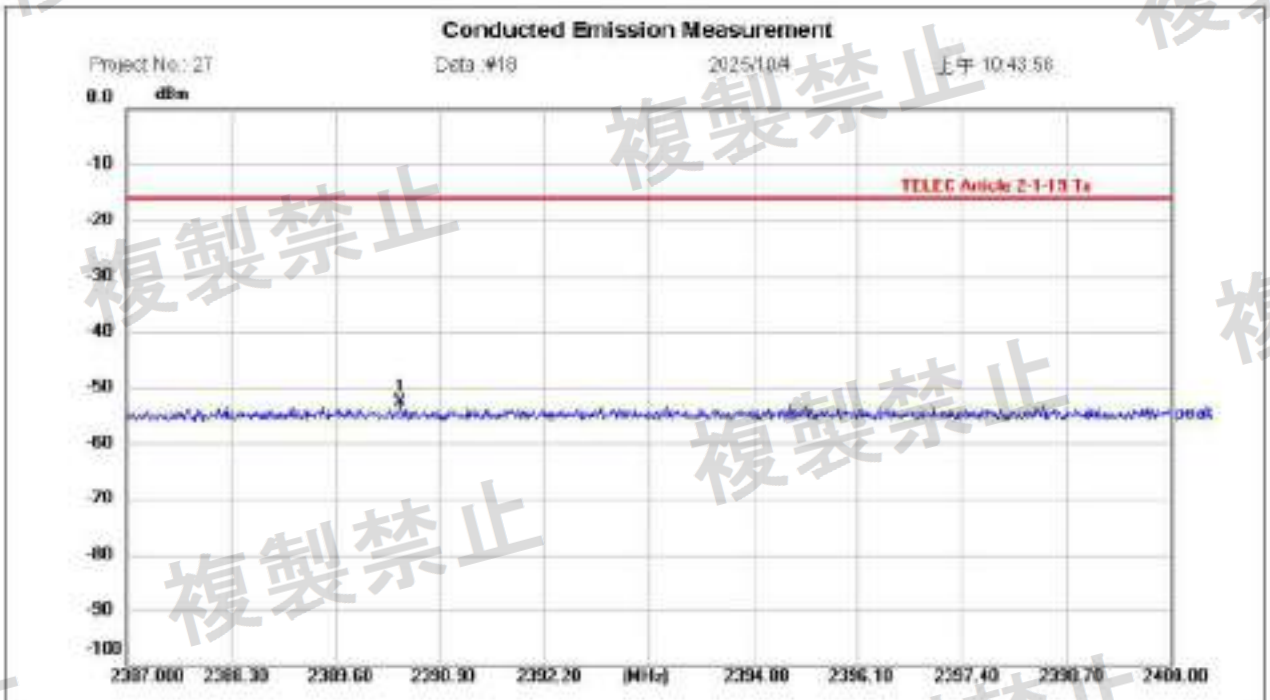


Site: Chamber 04
Limit: TELEC Article 2-1-19 Tx
EUT: W6M22508-24659
M/N:
Mode: Tx BLE 2M CH19
Note:

Polarization:
Power: 3.7 Volt
Distance:

Temperature: 23.9 (°C)
Humidity: 56 %RH

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	2390.406	-63.09	10.36	-52.73	-16.00	-36.73	peak			P	

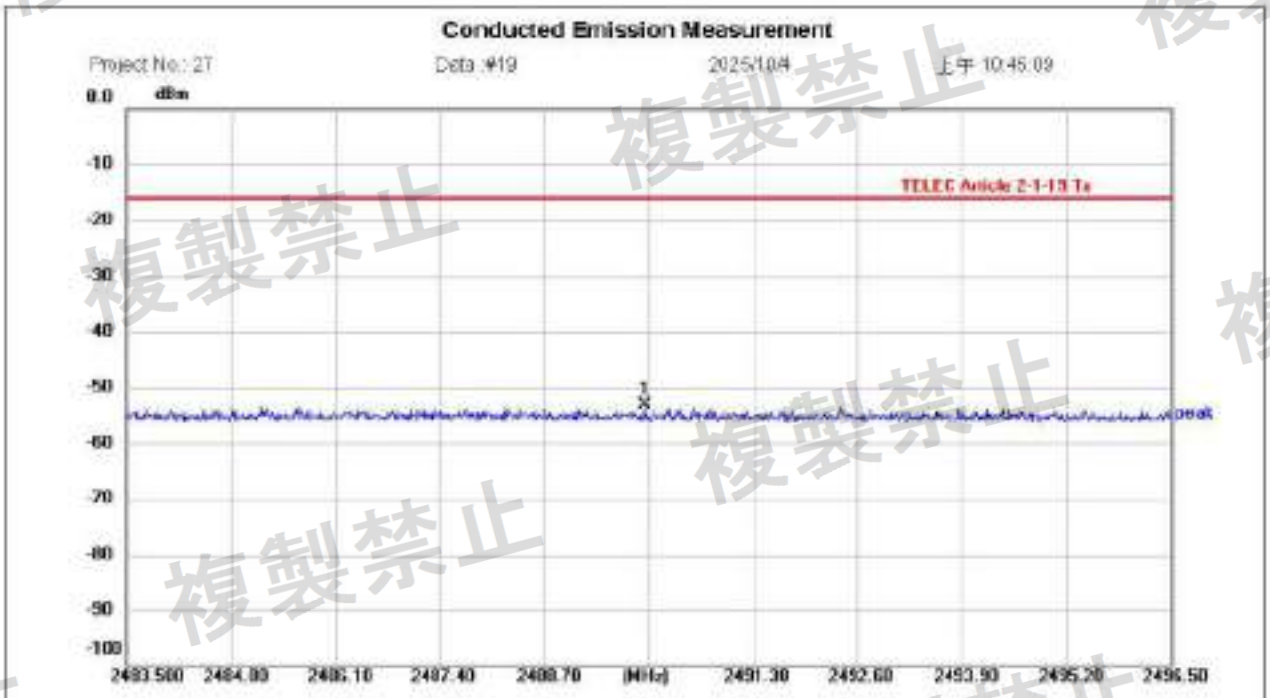


Site: Chamber 04
Limit: TELEC Article 2-1-19 Tx
EUT: W6M22508-24659
M/N:
Mode: Tx BLE 2M CH19
Note:

Polarization:
Power: 3.7 Volt
Distance:

Temperature: 23.9 (°C)
Humidity: 56 %RH

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	2489.948	-63.57	10.36	-53.21	-16.00	-37.21	peak			P	

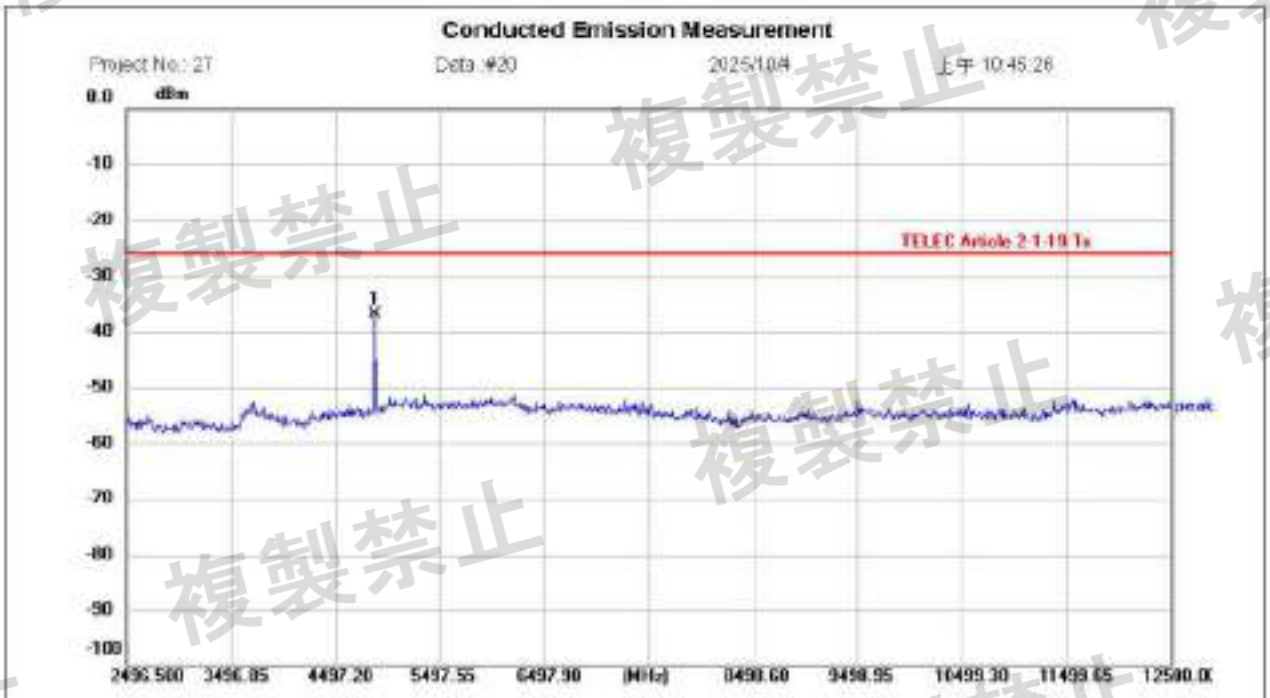


Site: Chamber 04
Limit: TELEC Article 2-1-19 Tx
EUT: W6M22508-24659
M/N:
Mode: Tx BLE 2M CH19
Note:

Polarization:
Power: 3.7 Volt
Distance:

Temperature: 23.9 (°C)
Humidity: 56 %RH

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	4877.333	-47.55	10.57	-36.98	-26.00	-10.98	peak			P	

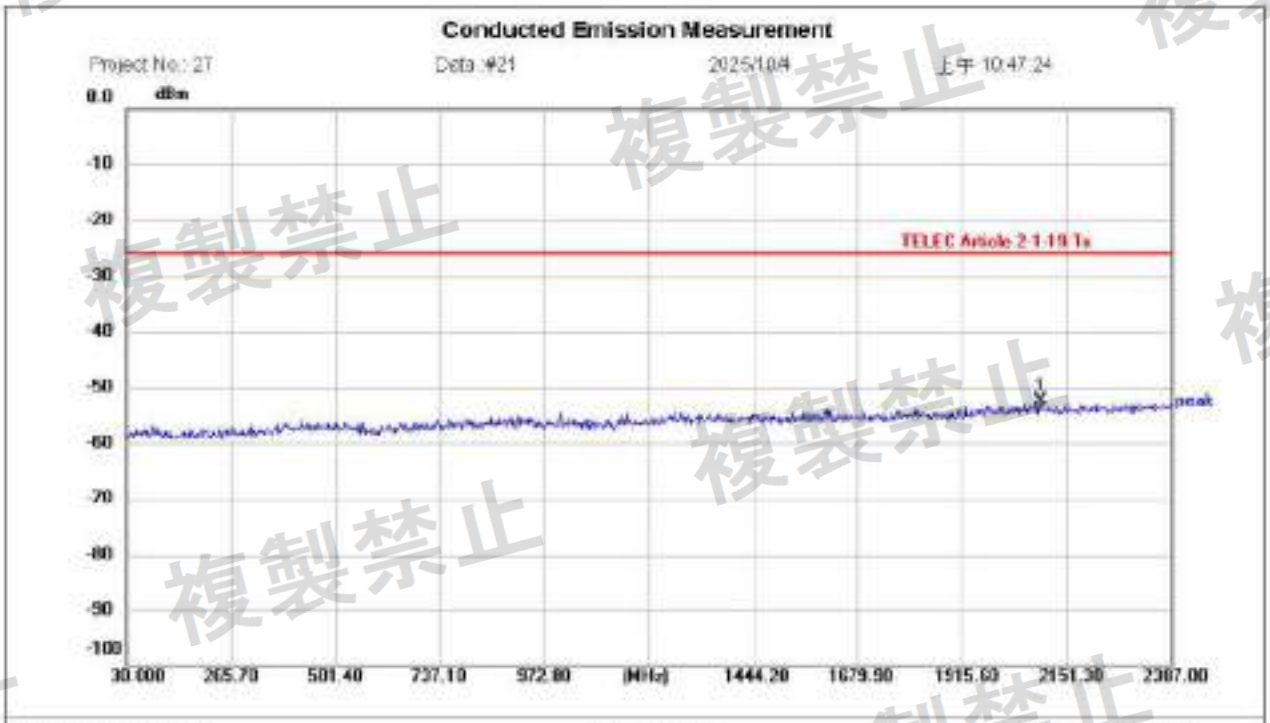


Site: Chamber 04
Limit: TELEC Article 2-1-19 Tx
EUT: W6M22508-24659
M/N:
Mode: Tx BLE 2M CH39
Note:

Polarization:
Power: 3.7 Volt
Distance:

Temperature: 23.9 (°C)
Humidity: 56 %RH

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	2092.375	-62.57	10.32	-52.25	-26.00	-26.25	peak			P	

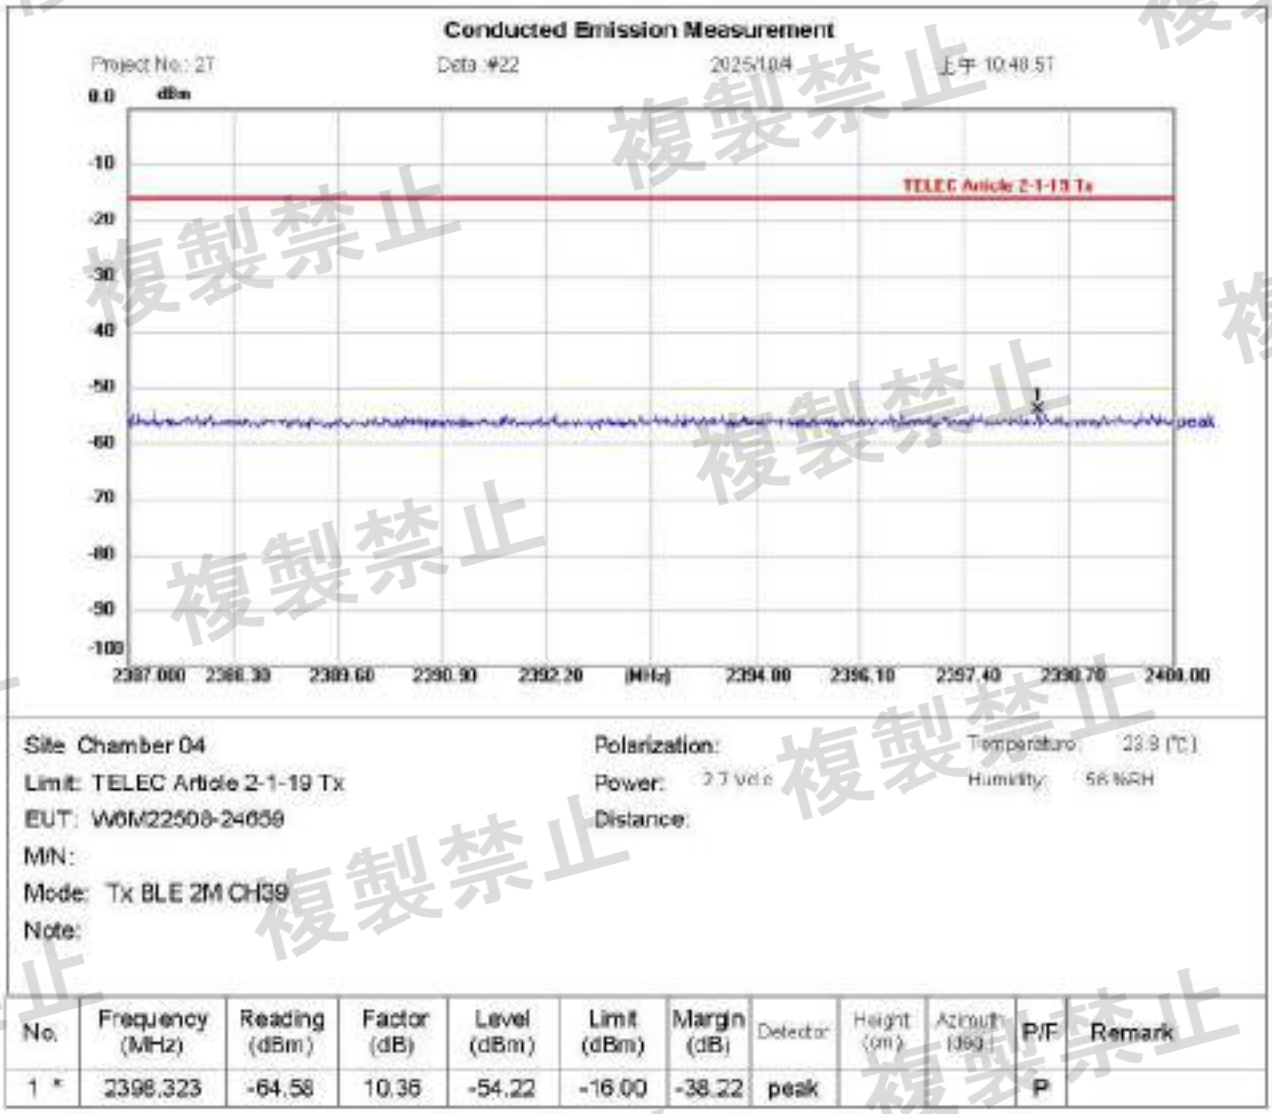


Site: Chamber 04
Limit: TELEC Article 2-1-19 Tx
EUT: W6M22508-24659
M/N:
Mode: Tx BLE 2M CH39
Note:

Polarization:
Power: 3.7 Volt
Distance:

Temperature: 23.9 (°C)
Humidity: 56 %RH

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	2398.323	-64.58	10.36	-54.22	-16.00	-38.22	peak			P	

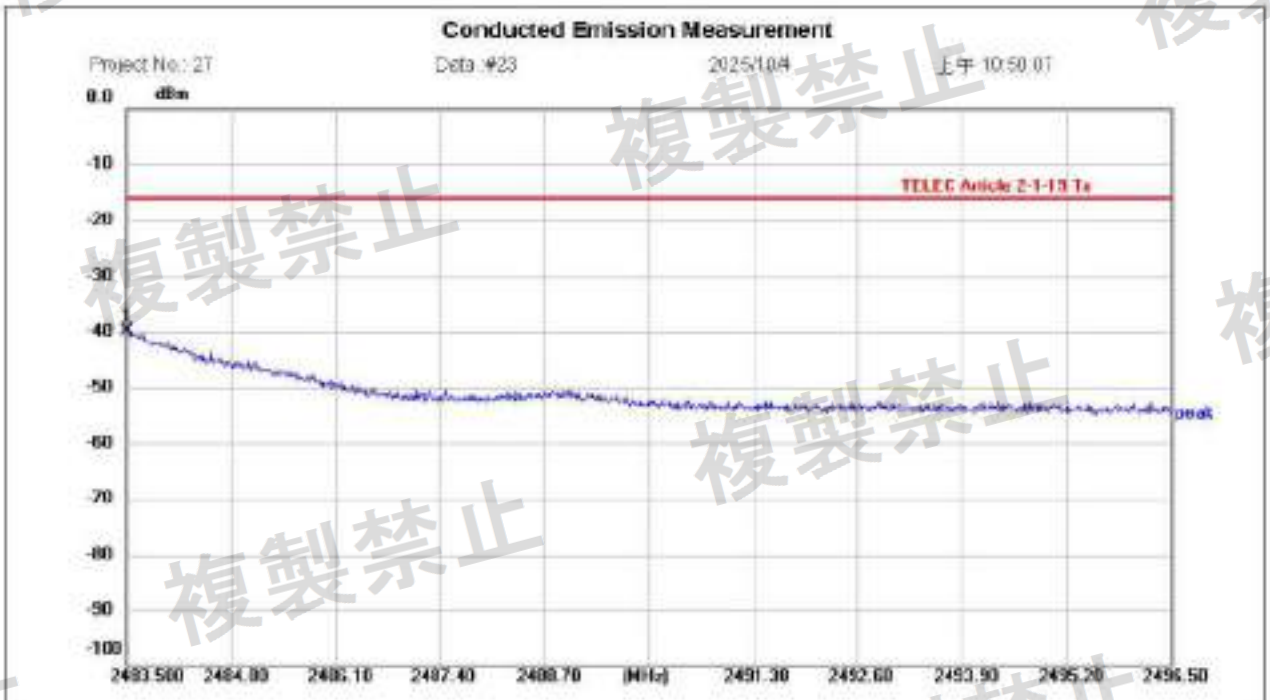


Site: Chamber 04
Limit: TELEC Article 2-1-19 Tx
EUT: W6M22508-24659
M/N:
Mode: Tx BLE 2M CH39
Note:

Polarization:
Power: 3.7 Volt
Distance:

Temperature: 23.9 (°C)
Humidity: 56 %RH

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	2483.513	-50.25	10.36	-39.89	-16.00	-23.89	peak			P	

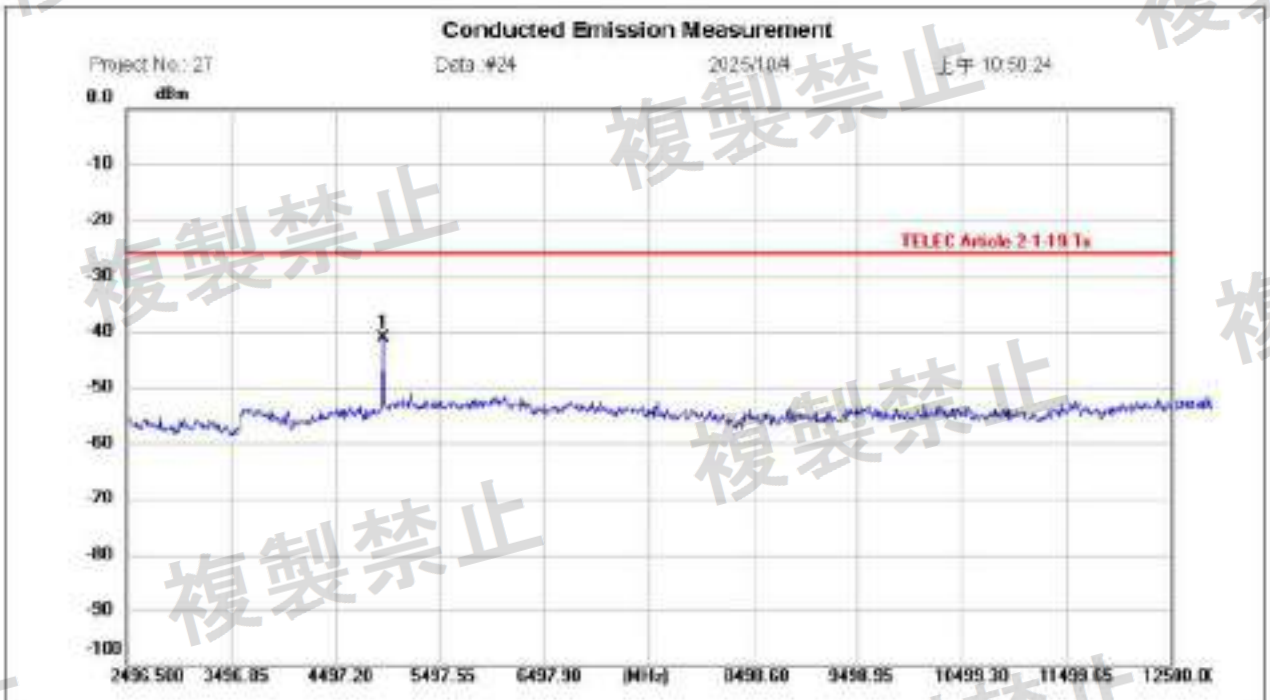


Site: Chamber 04
Limit: TELEC Article 2-1-19 Tx
EUT: W6M22508-24659
M/N:
Mode: Tx BLE 2M CH39
Note:

Polarization:
Power: 3.7 Volt
Distance:

Temperature: 23.9 (°C)
Humidity: 56 %RH

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	4957.361	-51.69	10.61	-41.08	-26.00	-15.08	peak			P	

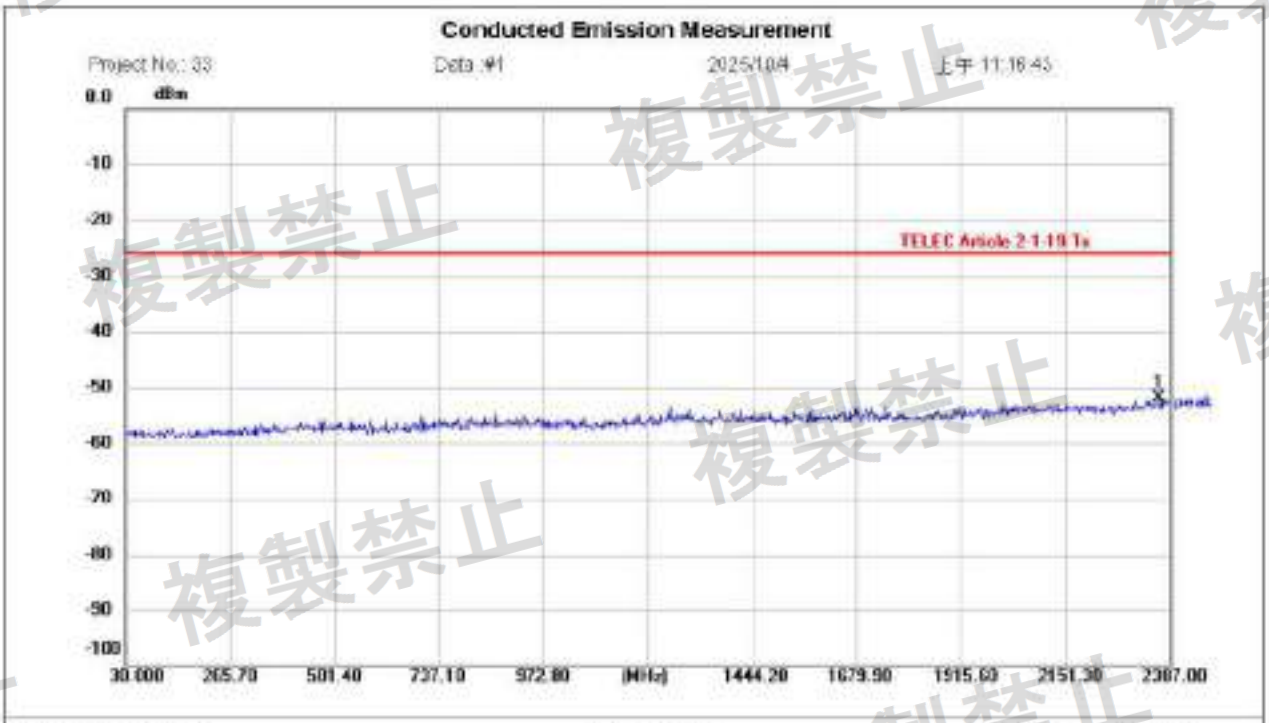


Site: Chamber 04
Limit: TELEC Article 2-1-19 Tx
EUT: W6M22508-24659
M/N:
Mode: Tx BLE 1M CH00
Note:

Polarization:
Power: 3.3 Volt
Distance:

Temperature: 23.9 (°C)
Humidity: 56 %RH

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	2363.430	-62.19	10.35	-51.84	-26.00	-25.84	peak			P	

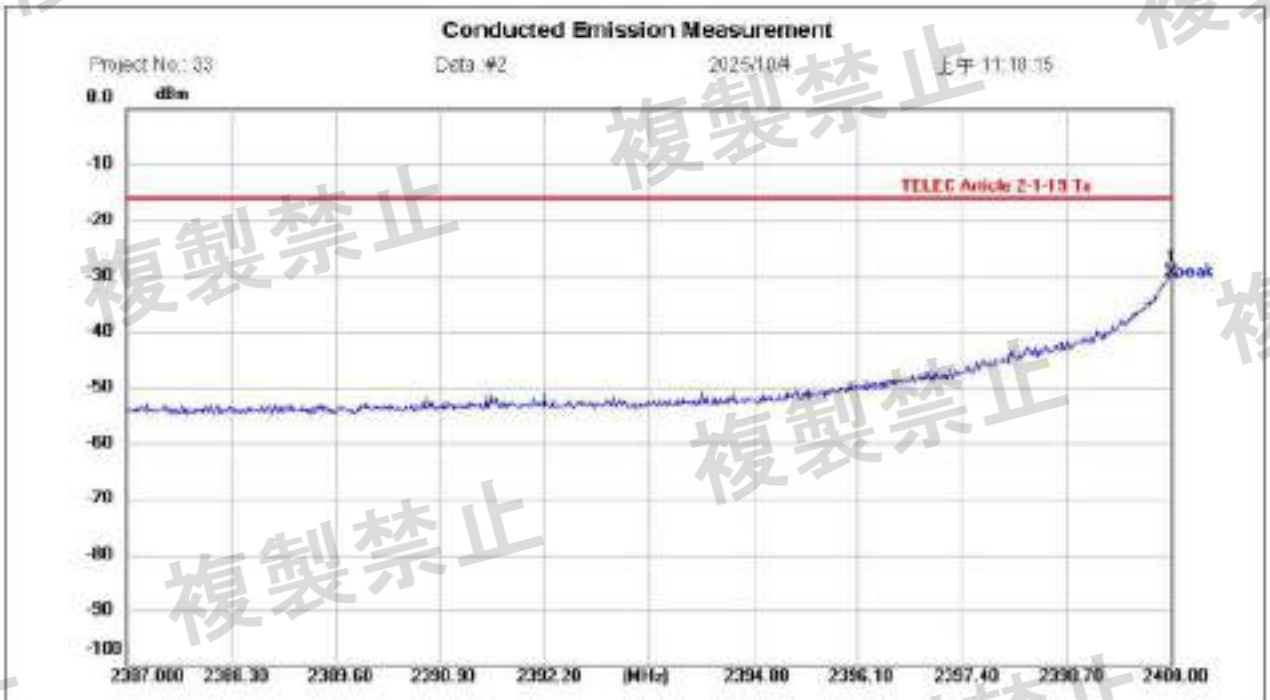


Site: Chamber 04
Limit: TELEC Article 2-1-19 Tx
EUT: W6M22508-24659
M/N:
Mode: Tx BLE 1M CH00
Note:

Polarization:
Power: 3.3 Volt
Distance:

Temperature: 23.9 (°C)
Humidity: 56 %RH

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	2400.000	-39.66	10.36	-29.30	-16.00	-13.30	peak			P	

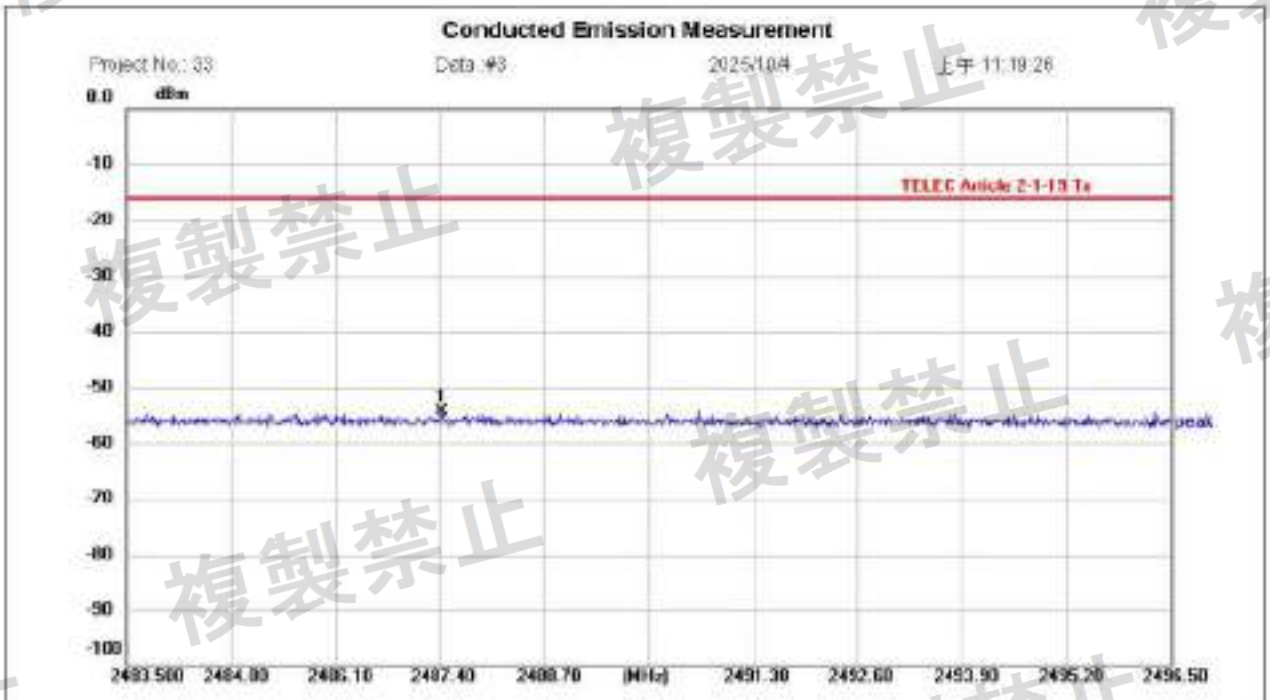


Site: Chamber 04
Limit: TELEC Article 2-1-19 Tx
EUT: W6M22508-24659
M/N:
Mode: Tx BLE 1M CH00
Note:

Polarization:
Power: 3.3 Volt
Distance:

Temperature: 23.9 (°C)
Humidity: 56 %RH

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	2487.426	-64.79	10.36	-54.43	-16.00	-38.43	peak			P	

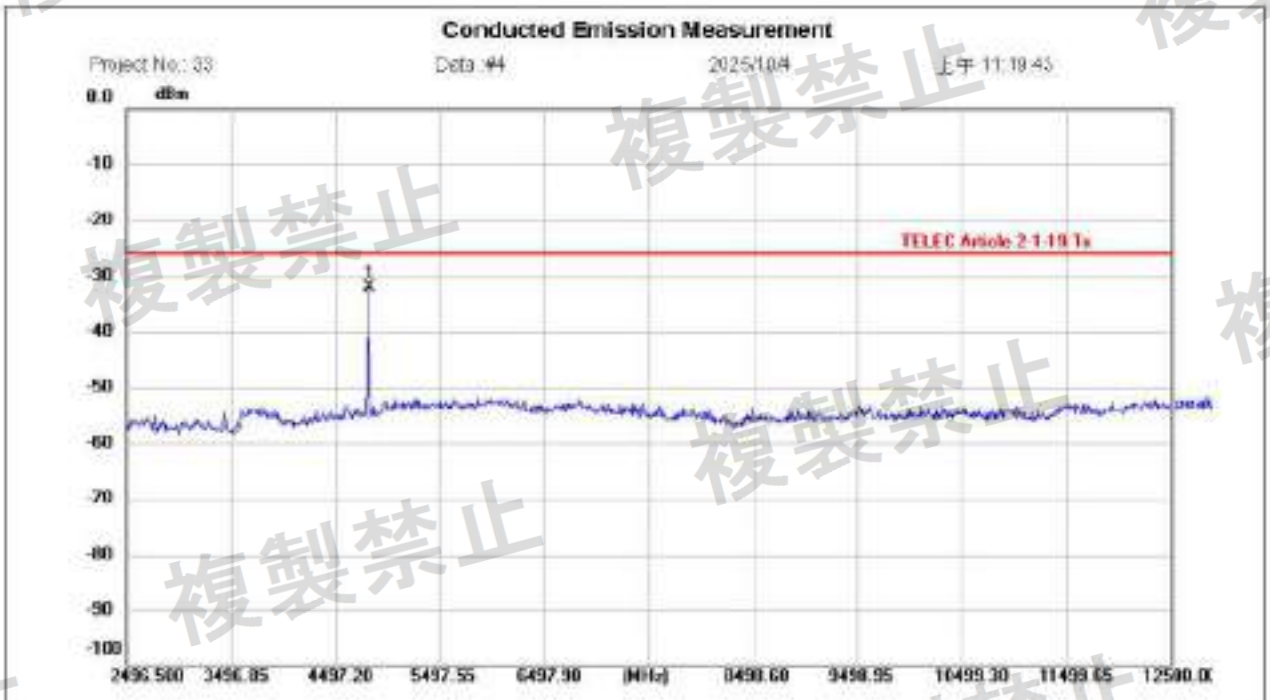


Site: Chamber 04
Limit: TELEC Article 2-1-19 Tx
EUT: W6M22508-24659
M/N:
Mode: Tx BLE 1M CH00
Note:

Polarization:
Power: 3.3 Volts
Distance:

Temperature: 23.9 (°C)
Humidity: 56 %RH

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	4807.309	-42.72	10.60	-32.12	-26.00	-6.12	peak			P	

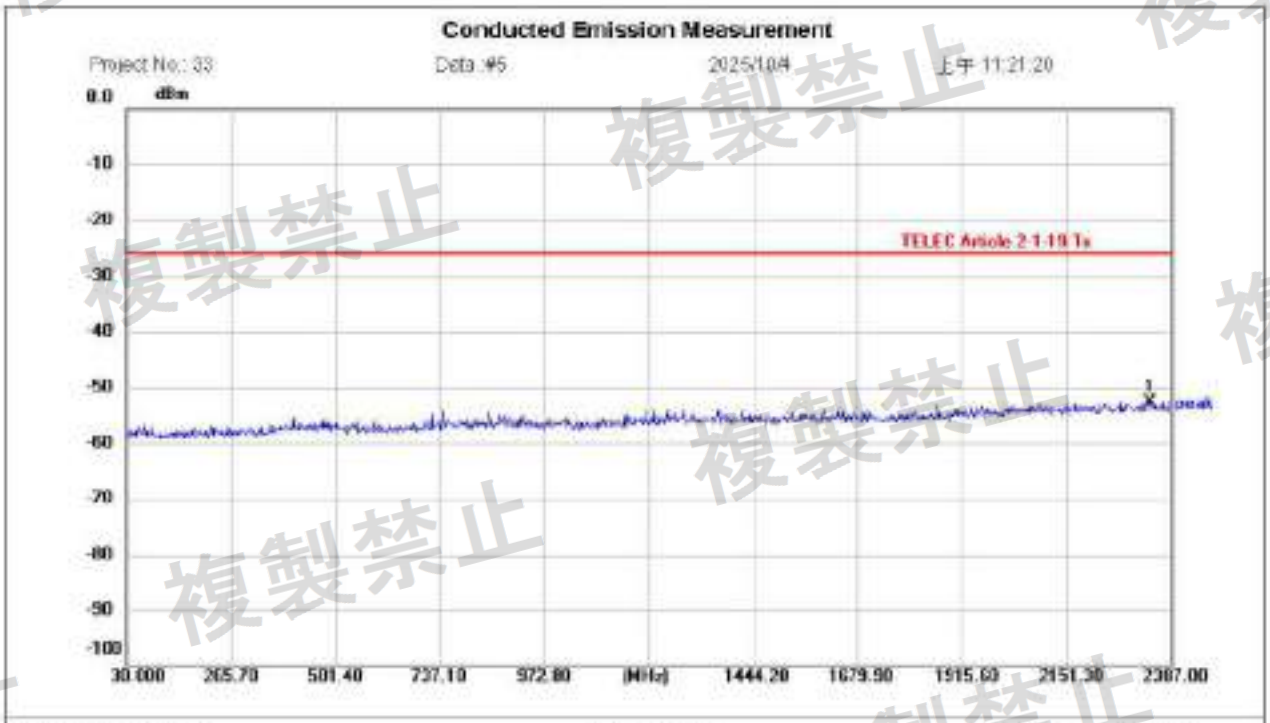


Site: Chamber 04
Limit: TELEC Article 2-1-19 Tx
EUT: W6M22508-24659
M/N:
Mode: Tx BLE 1M CH19
Note:

Polarization:
Power: 3.3 Volt
Distance:

Temperature: 23.9 (°C)
Humidity: 56 %RH

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	2339.860	-62.88	10.35	-52.53	-26.00	-26.53	peak			P	

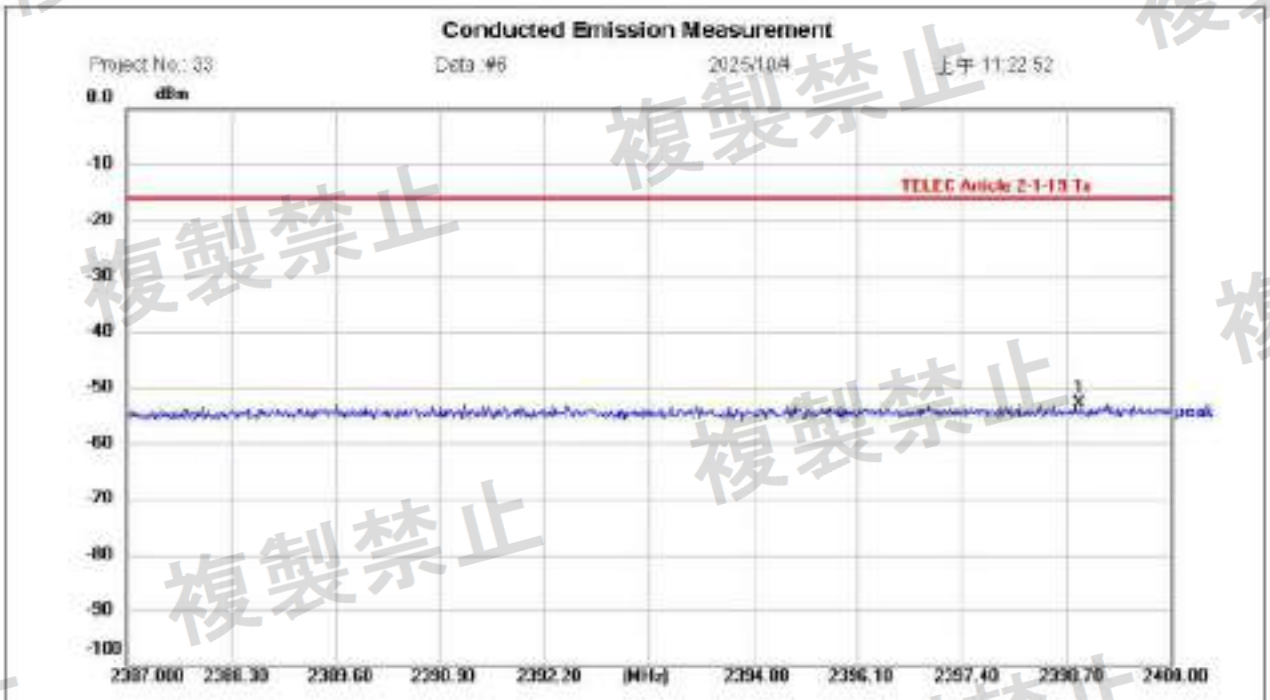


Site: Chamber 04
Limit: TELEC Article 2-1-19 Tx
EUT: W6M22508-24659
M/N:
Mode: Tx BLE 1M CH19
Note:

Polarization:
Power: 3.3 Volt
Distance:

Temperature: 23.9 (°C)
Humidity: 56 %RH

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	2398.869	-63.16	10.36	-52.80	-16.00	-36.80	peak			P	

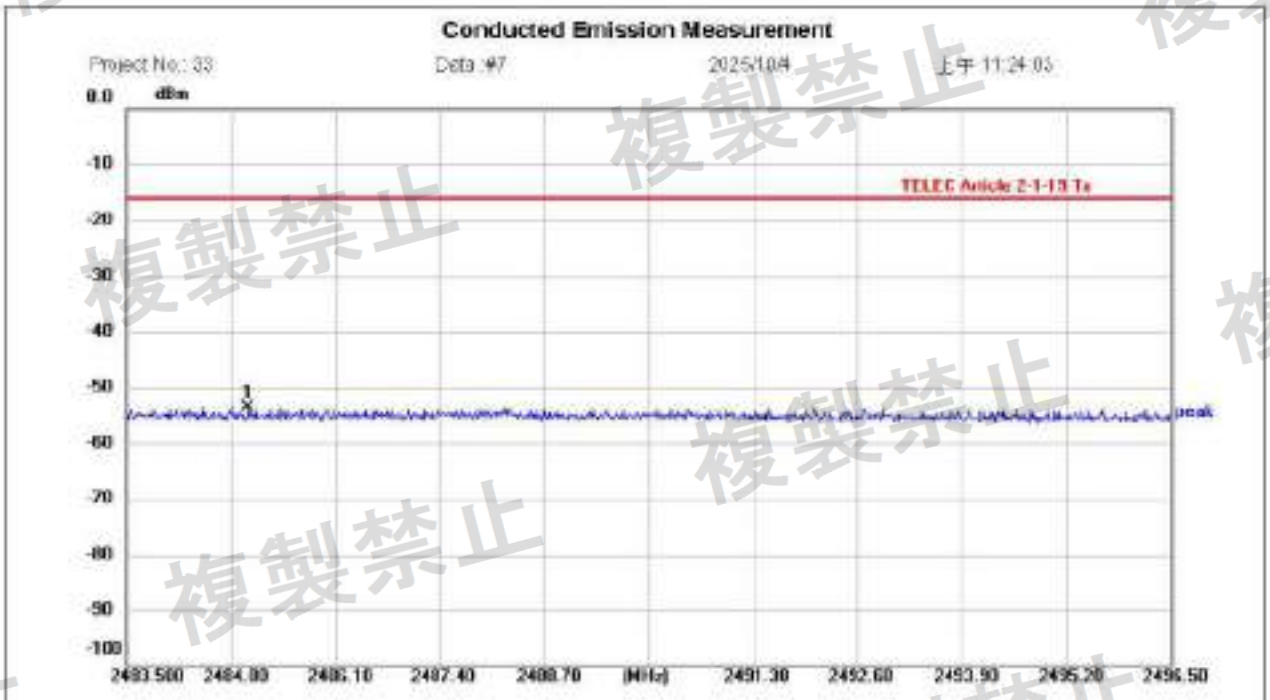


Site: Chamber 04
Limit: TELEC Article 2-1-19 Tx
EUT: W6M22508-24659
M/N:
Mode: Tx BLE 1M CH19
Note:

Polarization:
Power: 3.3 Volt
Distance:

Temperature: 23.9 (°C)
Humidity: 56 %RH

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	2485.021	-63.94	10.36	-53.58	-16.00	-37.58	peak			P	

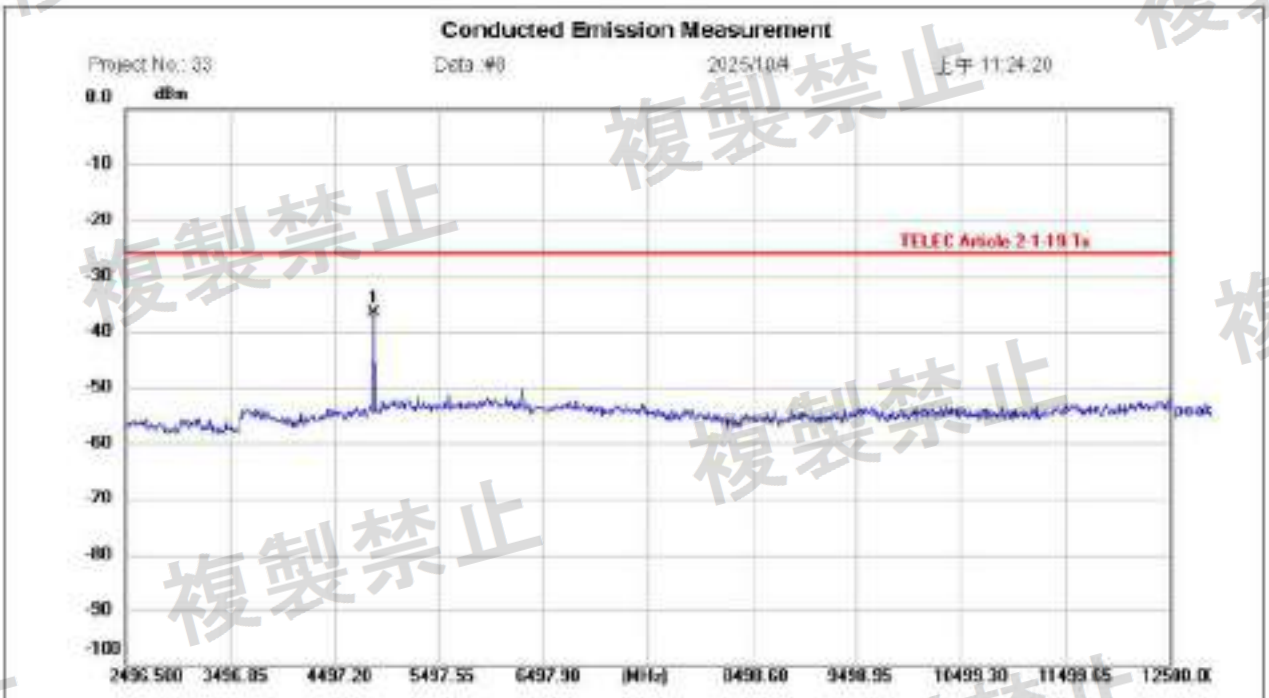


Site: Chamber 04
Limit: TELEC Article 2-1-19 Tx
EUT: W6M22508-24659
M/N:
Mode: Tx BLE 1M CH19
Note:

Polarization:
Power: 3.3 Volt
Distance:

Temperature: 23.9 (°C)
Humidity: 56 %RH

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	4877.333	-47.24	10.57	-36.67	-26.00	-10.67	peak			P	

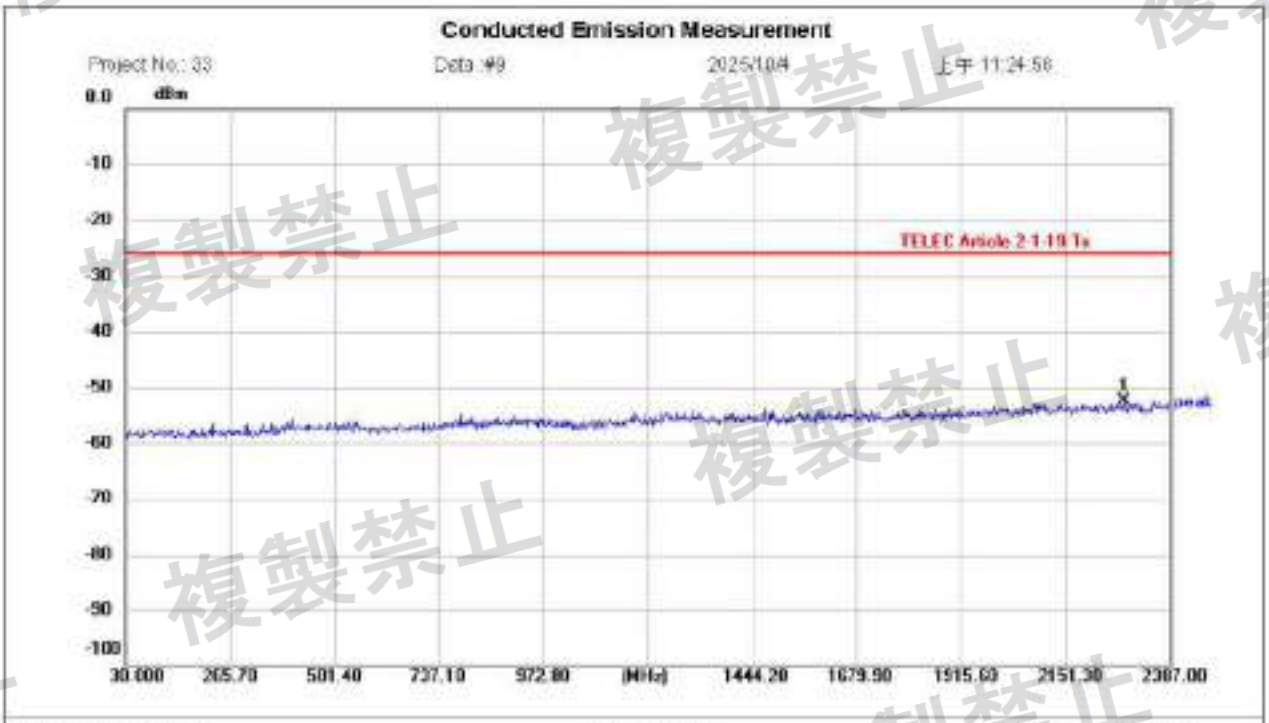


Site: Chamber 04
Limit: TELEC Article 2-1-19 Tx
EUT: W6M22508-24659
M/N:
Mode: Tx BLE 1M CH39
Note:

Polarization:
Power: 3.3 Volt
Distance:

Temperature: 23.9 (°C)
Humidity: 56 %RH

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	2283.292	-62.72	10.34	-52.38	-26.00	-26.38	peak			P	

複製禁止

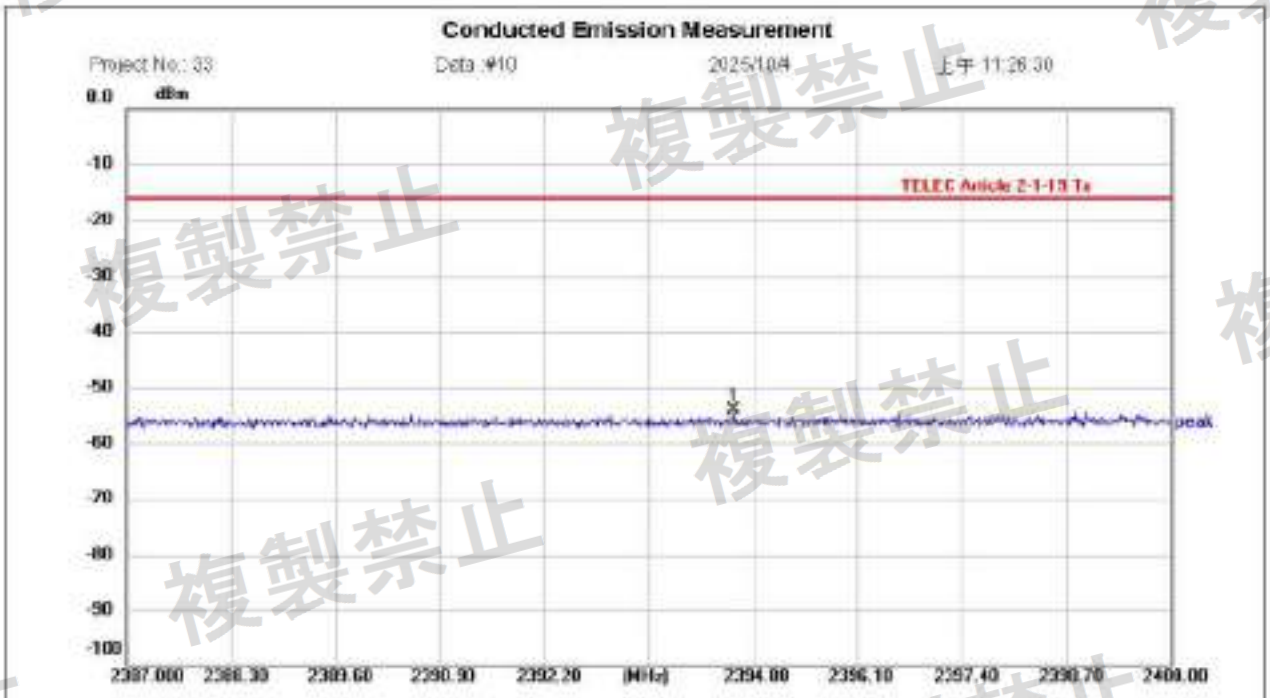


Site: Chamber 04
Limit: TELEC Article 2-1-19 Tx
EUT: W6M22508-24659
M/N:
Mode: Tx BLE 1M CH39
Note:

Polarization:
Power: 3.3 Volt
Distance:

Temperature: 23.9 (°C)
Humidity: 56 %RH

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	2394.566	-64.56	10.36	-54.20	-16.00	-38.20	peak			P	

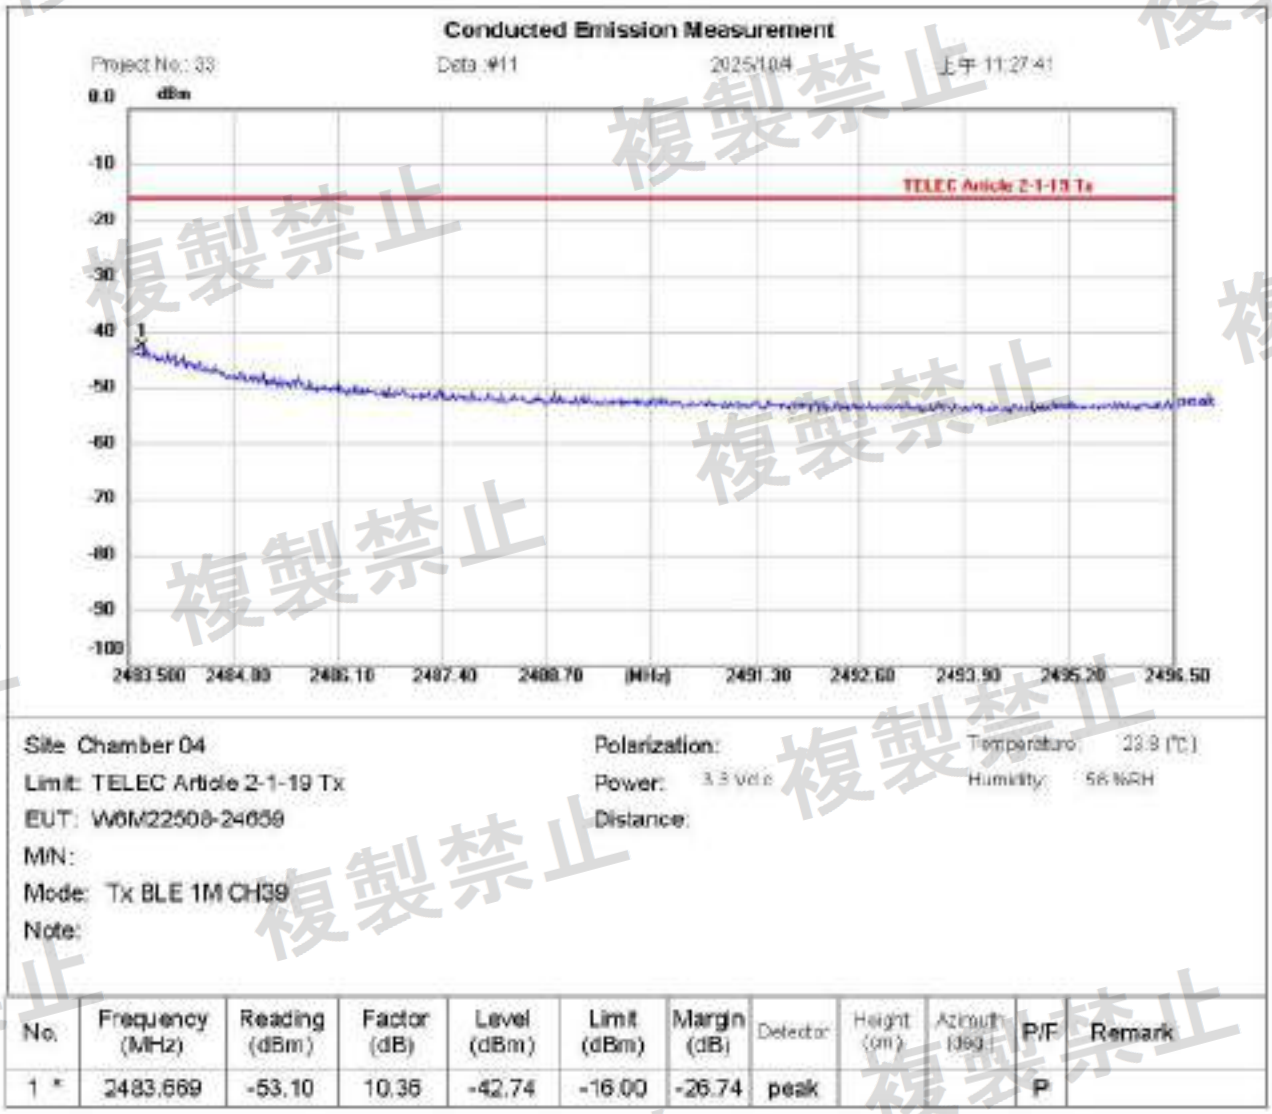


Site: Chamber 04
Limit: TELEC Article 2-1-19 Tx
EUT: W6M22508-24659
M/N:
Mode: Tx BLE 1M CH39
Note:

Polarization:
Power: 3.3 Volts
Distance:

Temperature: 23.9 (°C)
Humidity: 56 %RH

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	2483.669	-53.10	10.36	-42.74	-16.00	-26.74	peak			P	

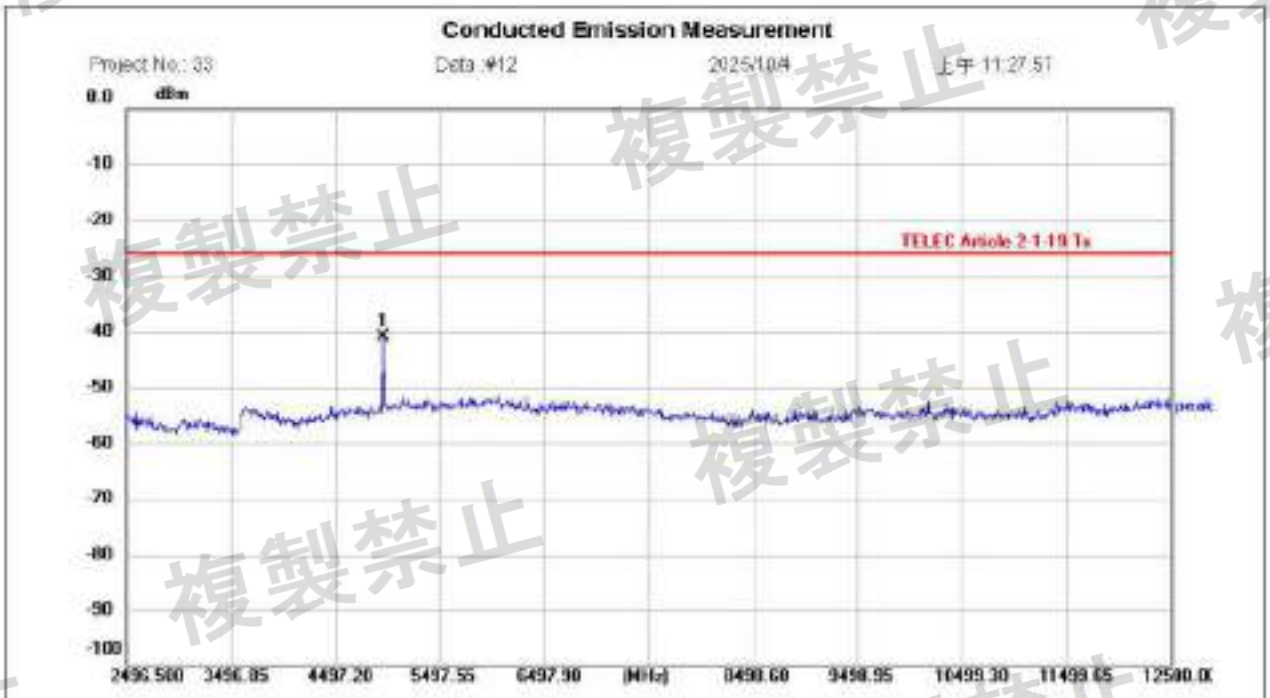


Site: Chamber 04
Limit: TELEC Article 2-1-19 Tx
EUT: W6M22508-24659
M/N:
Mode: Tx BLE 1M CH39
Note:

Polarization:
Power: 3.3 Volt
Distance:

Temperature: 23.9 (°C)
Humidity: 56 %RH

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	4957.361	-51.36	10.61	-40.75	-26.00	-14.75	peak			P	

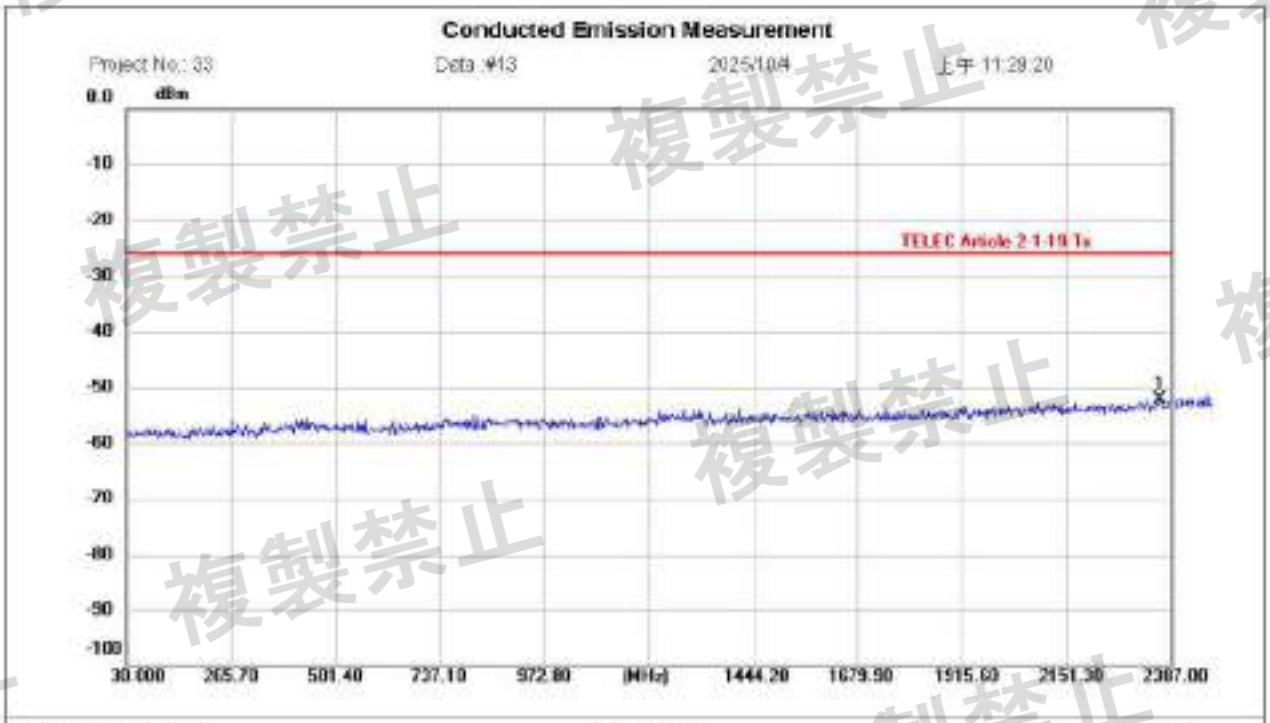


Site: Chamber 04
Limit: TELEC Article 2-1-19 Tx
EUT: W6M22508-24659
M/N:
Mode: Tx BLE 2M CH00
Note:

Polarization:
Power: 3.3 Volt
Distance:

Temperature: 23.9 (°C)
Humidity: 56 %RH

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	2363.430	-62.43	10.35	-52.08	-26.00	-26.08	peak			P	

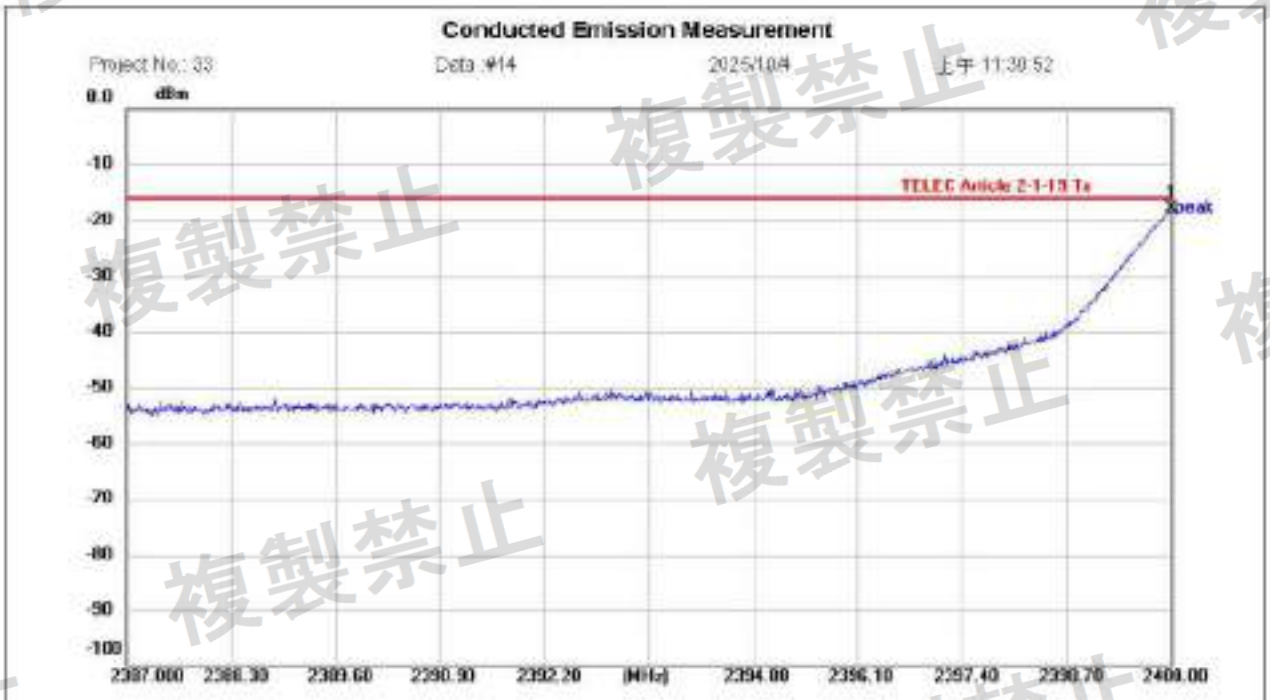


Site: Chamber 04
Limit: TELEC Article 2-1-19 Tx
EUT: W6M22508-24659
M/N:
Mode: Tx BLE 2M CH00
Note:

Polarization:
Power: 3.3 Volt
Distance:

Temperature: 23.9 (°C)
Humidity: 56 %RH

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	2400.000	-28.24	10.36	-17.88	-16.00	-1.88	peak			P	

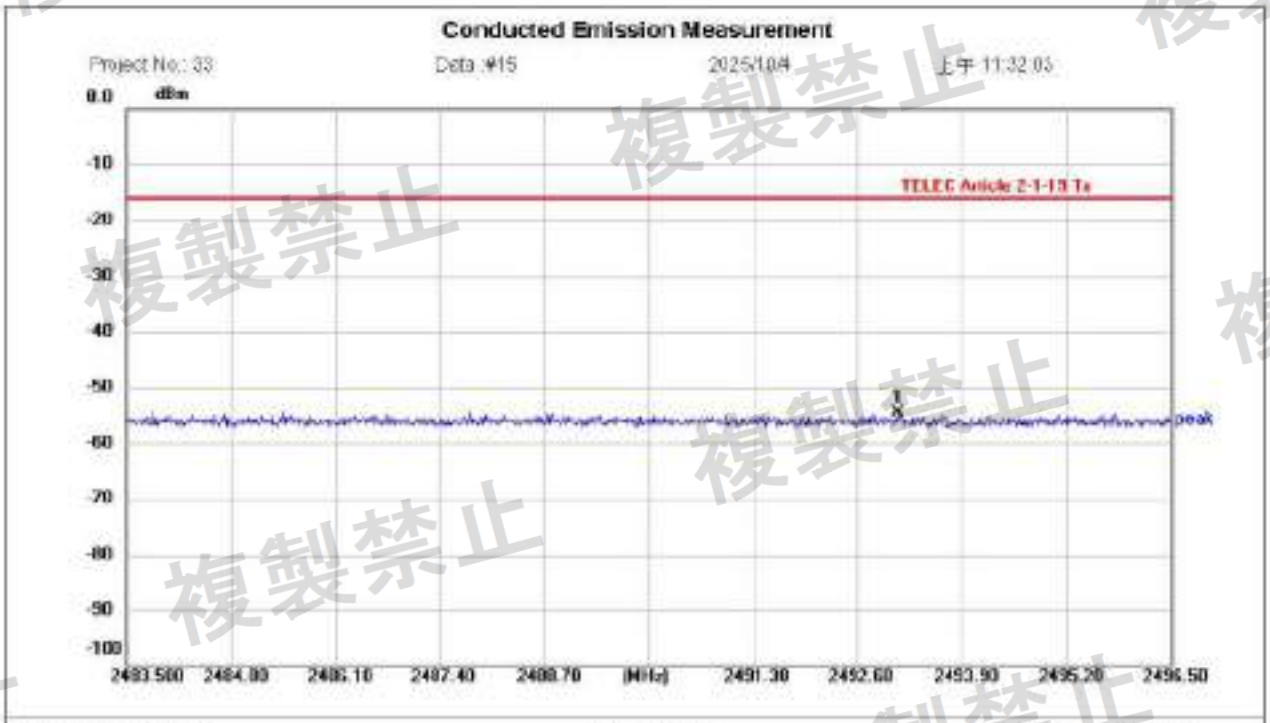


Site: Chamber 04
Limit: TELEC Article 2-1-19 Tx
EUT: W6M22508-24659
M/N:
Mode: Tx BLE 2M CH00
Note:

Polarization:
Power: 3.3 Volts
Distance:

Temperature: 23.9 (°C)
Humidity: 56 %RH

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	2493.107	-64.86	10.36	-54.50	-16.00	-38.50	peak			P	

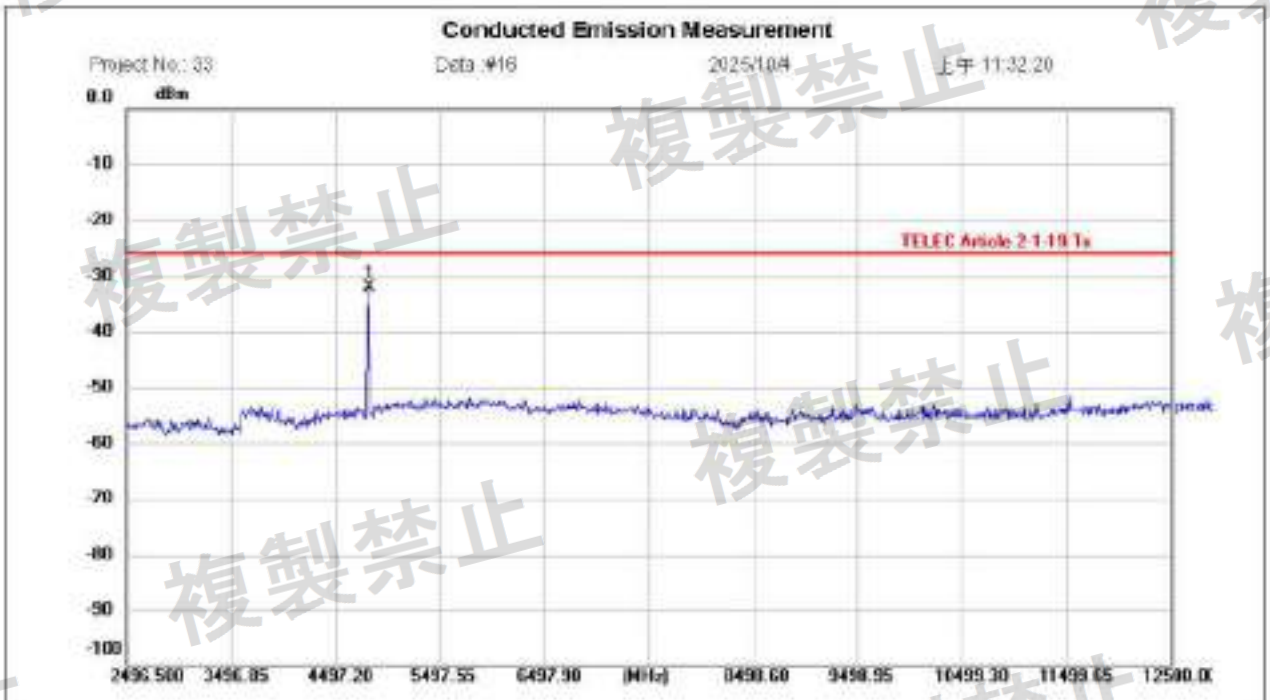


Site: Chamber 04
Limit: TELEC Article 2-1-19 Tx
EUT: W6M22508-24659
M/N:
Mode: Tx BLE 2M CH00
Note:

Polarization:
Power: 3.3 Volt
Distance:

Temperature: 23.9 (°C)
Humidity: 56 %RH

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	4807.309	-42.78	10.60	-32.18	-26.00	-6.18	peak			P	

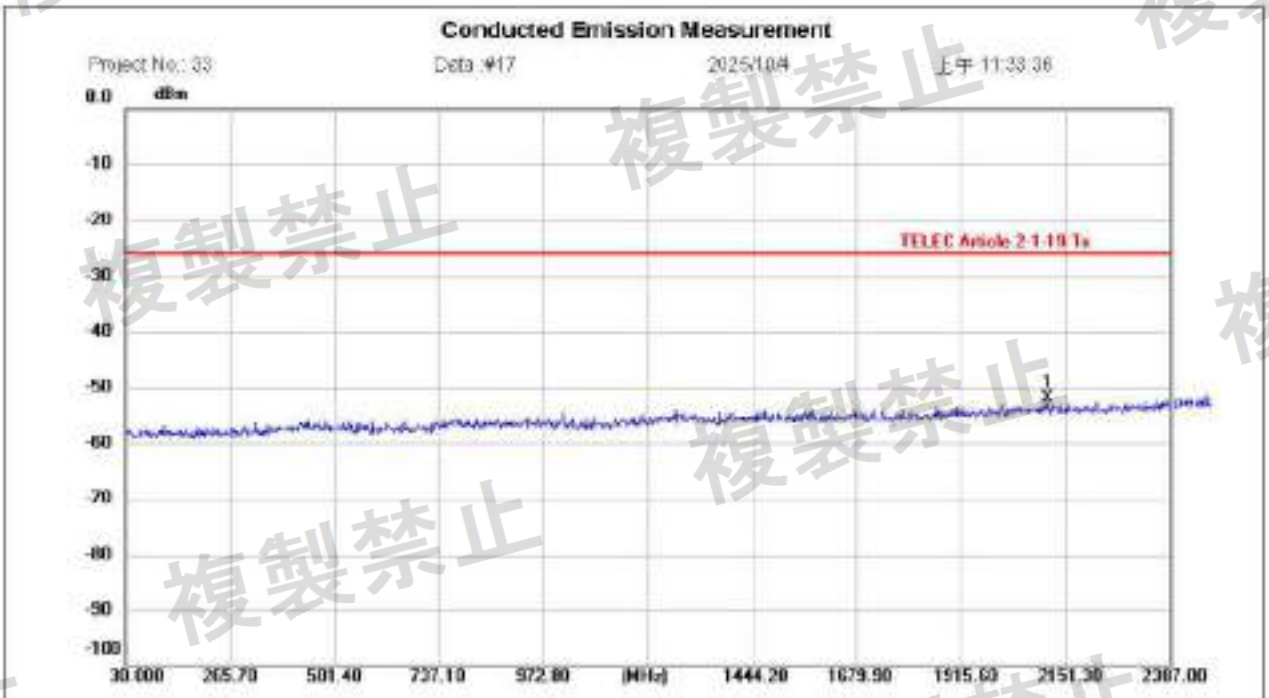


Site: Chamber 04
Limit: TELEC Article 2-1-19 Tx
EUT: W6M22508-24659
M/N:
Mode: Tx BLE 2M CH19
Note:

Polarization:
Power: 3.3 Volts
Distance:

Temperature: 23.9 (°C)
Humidity: 56 %RH

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	2111.231	-62.20	10.32	-51.88	-26.00	-25.88	peak			P	

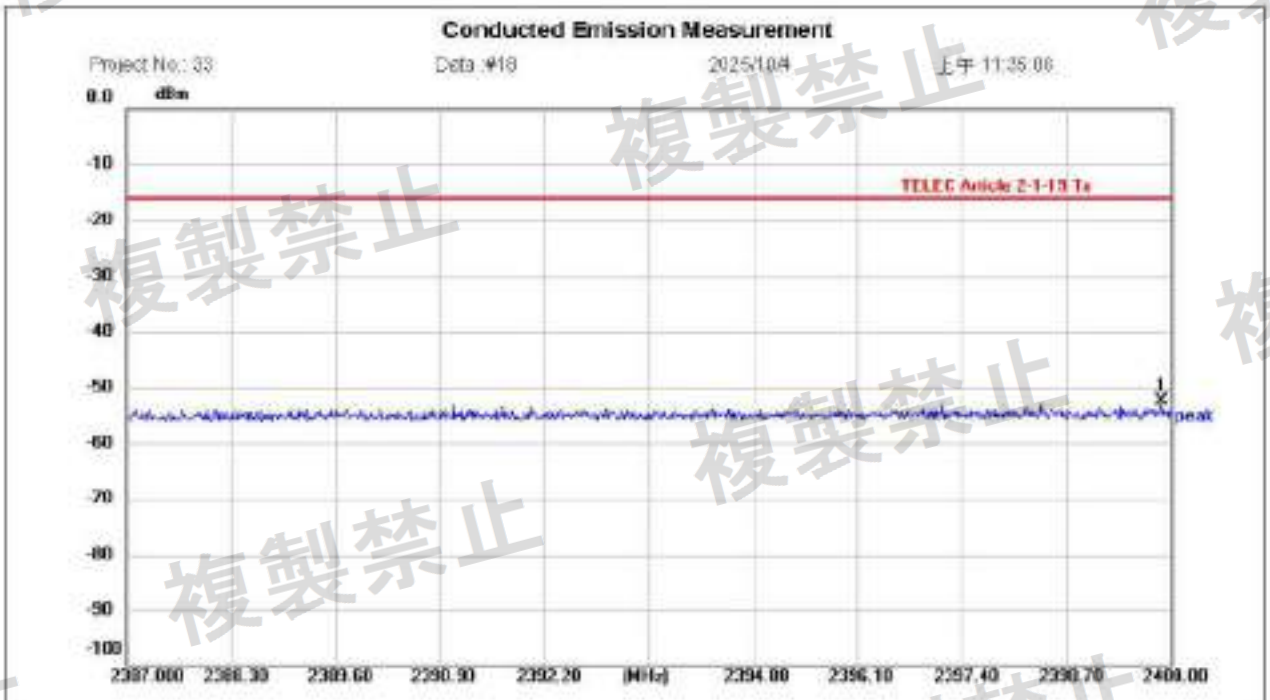


Site: Chamber 04
Limit: TELEC Article 2-1-19 Tx
EUT: W6M22508-24659
M/N:
Mode: Tx BLE 2M CH19
Note:

Polarization:
Power: 3.3 Volt
Distance:

Temperature: 23.9 (°C)
Humidity: 56 %RH

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	2399.883	-62.64	10.36	-52.28	-16.00	-36.28	peak			P	

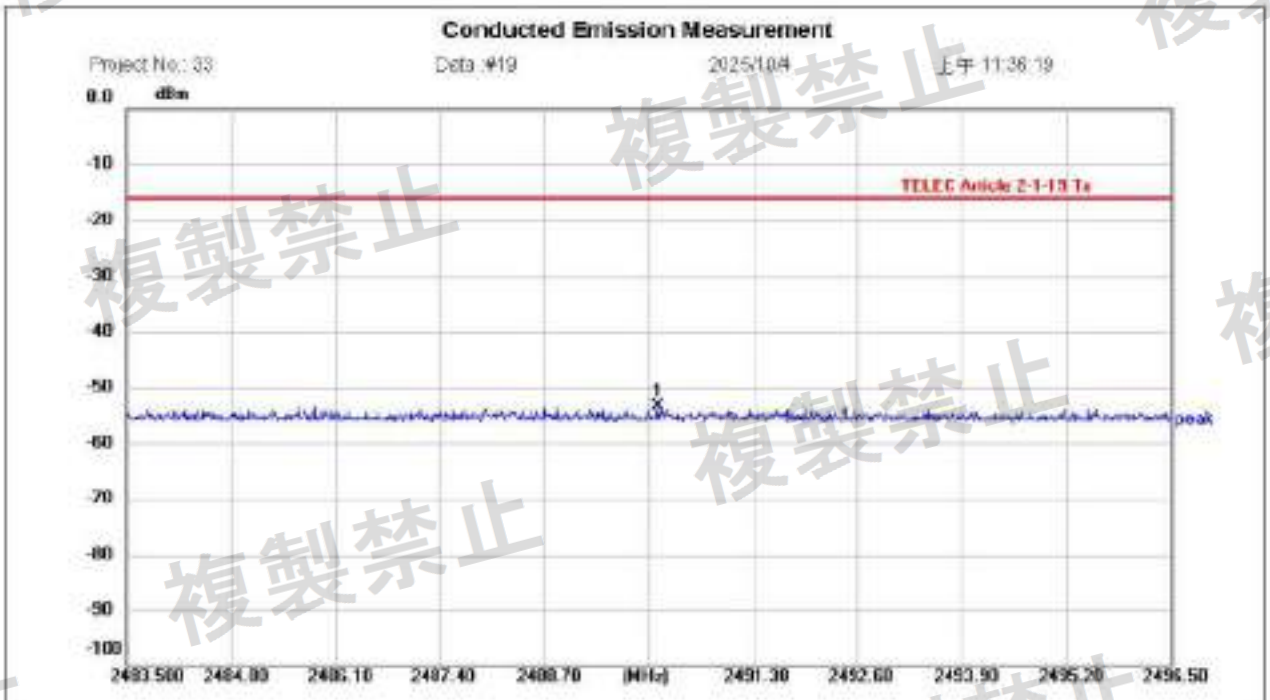


Site: Chamber 04
Limit: TELEC Article 2-1-19 Tx
EUT: W6M22508-24659
M/N:
Mode: Tx BLE 2M CH19
Note:

Polarization:
Power: 3.3 Volts
Distance:

Temperature: 23.9 (°C)
Humidity: 56 %RH

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	2490.104	-63.65	10.36	-53.29	-16.00	-37.29	peak			P	

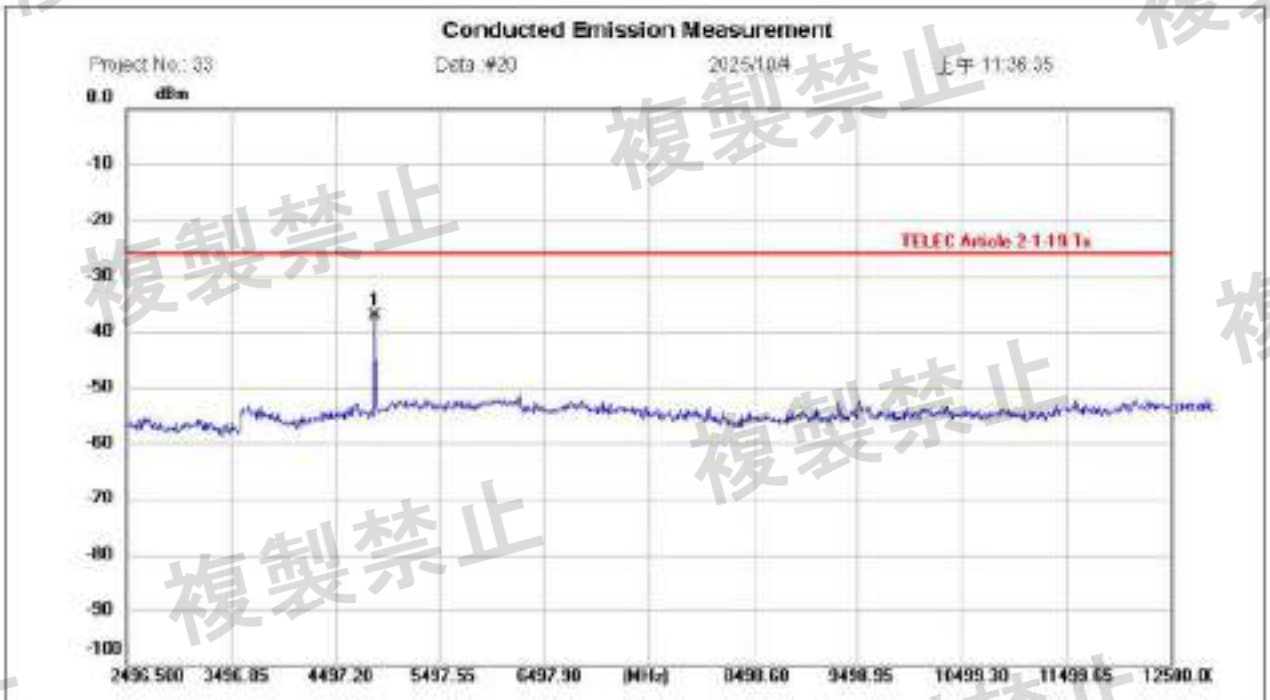


Site: Chamber 04
Limit: TELEC Article 2-1-19 Tx
EUT: W6M22508-24659
M/N:
Mode: Tx BLE 2M CH19
Note:

Polarization:
Power: 3.3 Volt
Distance:

Temperature: 23.9 (°C)
Humidity: 56 %RH

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	4877.333	-47.63	10.57	-37.06	-26.00	-11.06	peak			P	

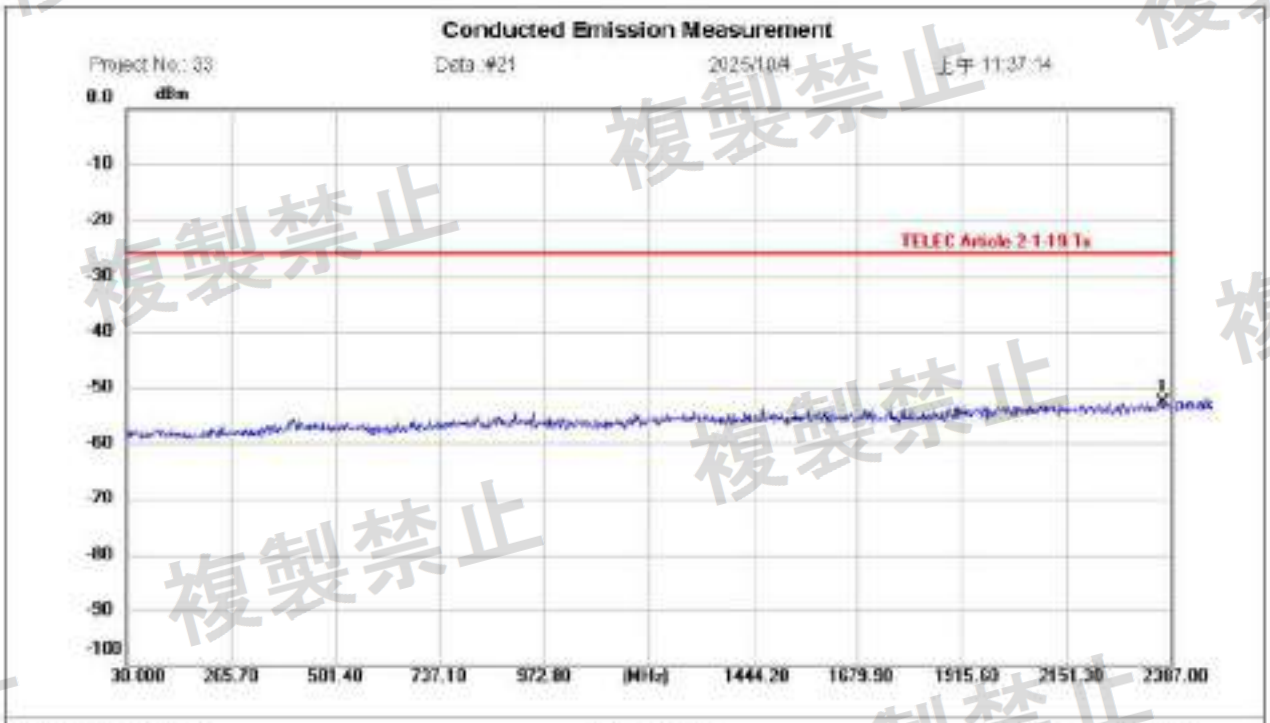


Site: Chamber 04
Limit: TELEC Article 2-1-19 Tx
EUT: W6M22508-24659
M/N:
Mode: Tx BLE 2M CH39
Note:

Polarization:
Power: 3.3 Volt
Distance:

Temperature: 23.9 (°C)
Humidity: 56 %RH

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	2365.787	-62.95	10.35	-52.60	-26.00	-26.60	peak			P	

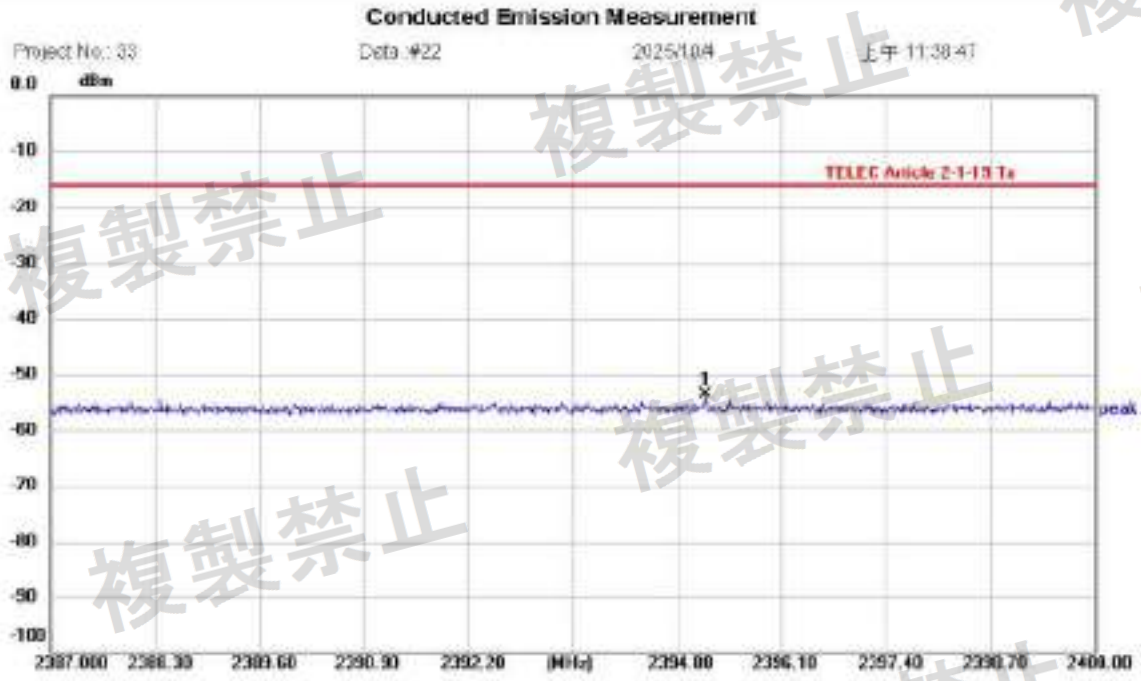


Site: Chamber 04
Limit: TELEC Article 2-1-19 Tx
EUT: W6M22508-24659
M/N:
Mode: Tx BLE 2M CH39
Note:

Polarization:
Power: 3.3 Volt
Distance:

Temperature: 23.9 (°C)
Humidity: 56 %RH

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	2395.151	-64.02	10.36	-53.66	-16.00	-37.66	peak			P	

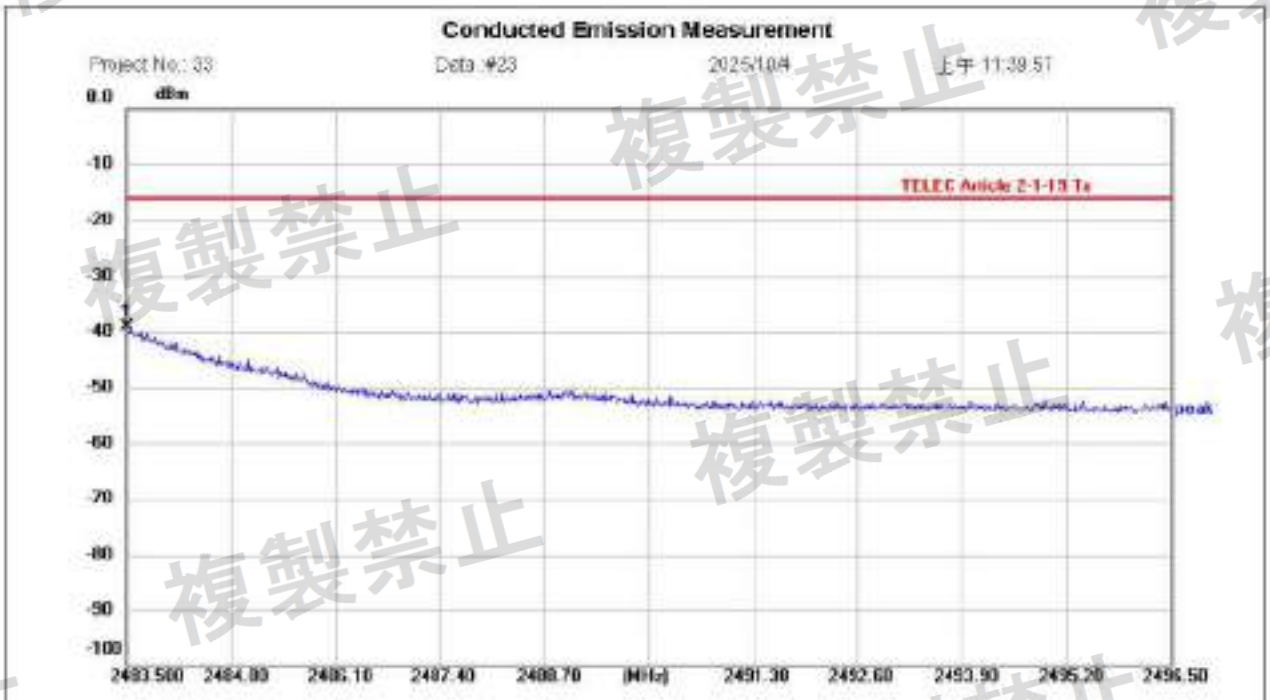


Site: Chamber 04
Limit: TELEC Article 2-1-19 Tx
EUT: W6M22508-24659
M/N:
Mode: Tx BLE 2M CH39
Note:

Polarization:
Power: 3.3 Volt
Distance:

Temperature: 23.9 (°C)
Humidity: 56 %RH

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	2483.500	-49.60	10.36	-39.24	-16.00	-23.24	peak			P	

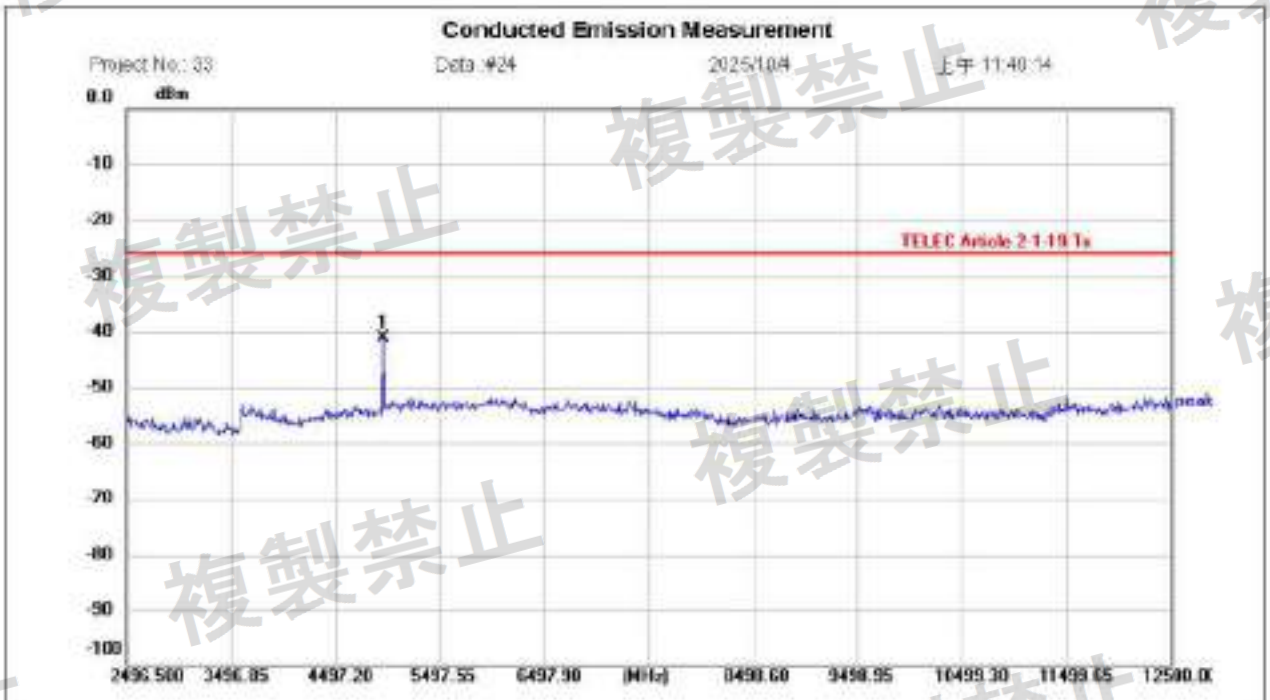

Site: Chamber 04
Limit: TELEC Article 2-1-19 Tx
EUT: W6M22508-24659
M/N:
Mode: Tx BLE 2M CH39
Note:

Polarization:
Power: 3.3 Volt
Distance:

Temperature: 23.9 (°C)
Humidity: 56 %RH

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	4957.361	-51.70	10.61	-41.09	-26.00	-15.09	peak			P	

Limits:

Transmitting operating	Operating frequency 2400 – 2483 MHz: Below 2387MHz : 2.5μW/MHz (-26 dBm) 2387 to 2400MHz : 25μW/MHz (-16 dBm) 2483.5 through 2496.5MHz : 25μW/MHz (-16 dBm) Over 2496.5MHz : 2.5μW/MHz (-16 dBm)

30MHz-2387MHz

1. The measurement use RBW = 1 MHz, VBW = 1 MHz
2. The unit is dBm/MHz for the Reading, the Result, and the Limit.
3. Correction Factor = Attenuator + Cable loss
4. The formula of measured value as: Test Result = Reading + Correction Factor
5. Line: PK Limit Line,

2387MHz-2400MHz

1. The measurement use RBW = 1 MHz, VBW = 1 MHz
2. The unit is dBm/MHz for the Reading, the Result, and the Limit.
3. Correction Factor = Attenuator + Cable loss
4. The formula of measured value as: Test Result = Reading + Correction Factor
5. Line: PK Limit Line,

2483.5MHz-2496.5MHz

1. The measurement use RBW = 1 MHz, VBW = 1 MHz
2. The unit is dBm/MHz for the Reading, the Result, and the Limit.
3. Correction Factor = Attenuator + Cable loss
4. The formula of measured value as: Test Result = Reading + Correction Factor
5. Line: PK Limit Line,

2496.5MHz-12500MHz

1. The measurement use RBW = 1 MHz, VBW = 1 MHz
2. The unit is dBm/MHz for the Reading, the Result, and the Limit.
3. Correction Factor = Attenuator + Cable loss
4. The formula of measured value as: Test Result = Reading + Correction Factor
5. Line: PK Limit Line,

3.5 Antenna Power

Test date: October 04, 2025
Temperature: 24.1˚C
Humidity: 56.0%
Tester: Sora

Chip Antenna

Mode	Frequency	Power (mW)			Limit (mW)
		Vmin	Vnor	Vmax	
BLE 1M	2402 MHz	6.30	6.55	6.47	10
	2440 MHz	6.28	6.43	6.41	10
	2480 MHz	6.35	6.50	6.49	10
BLE 2M	2402 MHz	6.53	6.64	6.59	10
	2440 MHz	6.50	6.61	6.50	10
	2480 MHz	6.55	6.64	6.52	10

Tolerance based on rated output power 10 mW	
6.64 mW	-33.60%
6.41 mW	-35.90%

Inverted F Antenna

Mode	Frequency	Power (mW)			Limit (mW)
		Vmin	Vnor	Vmax	
BLE 1M	2402 MHz	5.08	5.20	5.21	10
	2440 MHz	4.91	4.99	4.98	10
	2480 MHz	4.79	4.82	4.83	10
BLE 2M	2402 MHz	5.27	5.28	5.30	10
	2440 MHz	5.05	5.06	5.08	10
	2480 MHz	4.90	4.93	4.92	10

Tolerance based on rated output power 10 mW	
5.30 mW	-47.00%
4.79 mW	-52.10%

External Antenna

Mode	Frequency	Power (mW)			Limit (mW)
		Vmin	Vnor	Vmax	
BLE 1M	2402 MHz	3.23	3.18	3.21	10
	2440 MHz	2.89	2.86	2.85	10
	2480 MHz	2.57	2.56	2.53	10
BLE 2M	2402 MHz	3.29	3.27	3.24	10
	2440 MHz	2.94	2.94	2.87	10
	2480 MHz	2.61	2.63	2.54	10

Tolerance based on rated output power 10 mW	
3.29 mW	-67.10%
2.53 mW	-74.70%

Explanation: ./.

Limits:

Under all test conditions	Conducted	(1) FH, FH+DS, FH+OFDM 3mW/MHz (used in the range of 2427 - 2470.75MHz) (2) Other than (1) of OFDM & DS : 10mW/MHz (3) Other than (1) & (2) : 10mW Tolerance: +20%

3.6 E.I.R.P.

A represents the value determined by dividing an equivalent isotropically radiated power by the value obtained by applying an antenna power with the mean power of 10 mW to the transmitting antenna with its absolute gain being 2.14 dBi, and shall be 1 when it is lower than 1.

Test date: October 04, 2025
Temperature: 24.1˚C
Humidity: 56.0%
Tester: Sora

Chip Antenna

Mode	Frequency	Power (dBm)			Antenna gain (dBi)	EIRP (dBm)	Limit (dBm)
		Vmin	Vnor	Vmax			
BLE 1M	2402 MHz	7.99	8.16	8.11	3.2	11.36	12.14
	2440 MHz	7.98	8.08	8.07	3.2	11.28	12.14
	2480 MHz	8.03	8.13	8.12	3.2	11.33	12.14
BLE 2M	2402 MHz	8.15	8.22	8.19	3.2	11.42	12.14
	2440 MHz	8.13	8.2	8.13	3.2	11.4	12.14
	2480 MHz	8.16	8.22	8.14	3.2	11.42	12.14

Inverted F Antenna


Mode	Frequency	Power (dBm)			Antenna gain (dBi)	EIRP (dBm)	Limit (dBm)
		Vmin	Vnor	Vmax			
BLE 1M	2402 MHz	7.06	7.16	7.17	3.3	10.47	12.14
	2440 MHz	6.91	6.98	6.97	3.3	10.28	12.14
	2480 MHz	6.8	6.83	6.84	3.3	10.14	12.14
BLE 2M	2402 MHz	7.22	7.23	7.24	3.3	10.54	12.14
	2440 MHz	7.03	7.04	7.06	3.3	10.36	12.14
	2480 MHz	6.9	6.93	6.92	3.3	10.23	12.14

External Antenna

Mode	Frequency	Power (dBm)			Antenna gain (dBi)	EIRP (dBm)	Limit (dBm)
		Vmin	Vnor	Vmax			
BLE 1M	2402 MHz	5.09	5.03	5.07	2	7.09	12.14
	2440 MHz	4.61	4.57	4.55	2	6.61	12.14
	2480 MHz	4.1	4.08	4.03	2	6.1	12.14
BLE 2M	2402 MHz	5.17	5.15	5.1	2	7.17	12.14
	2440 MHz	4.68	4.68	4.58	2	6.68	12.14
	2480 MHz	4.17	4.2	4.04	2	6.2	12.14

3.7 Spurious emission receiver

Chip Antenna

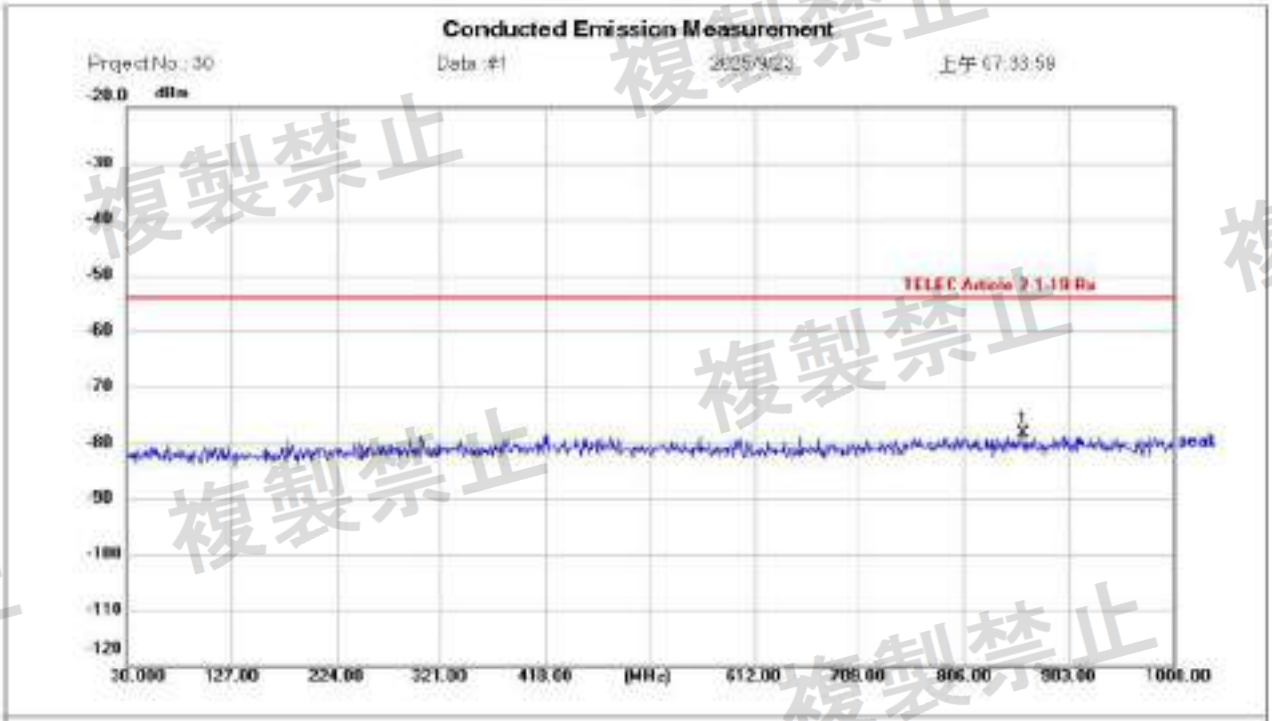


Site: Chamber 04
Limit: TELEC Artide 2-1-19 Rx
EUT: W6M22508-24659
M/N:
Mode: Rx BLE 1M CH00
Note:

Polarization:
Power: 3 V0.6
Distance:

Temperature: 23.8 (°C)
Humidity: 59 %RH

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1 *	861.2900	-88.57	10.14	-78.43	-54.00	-24.43	peak			P	

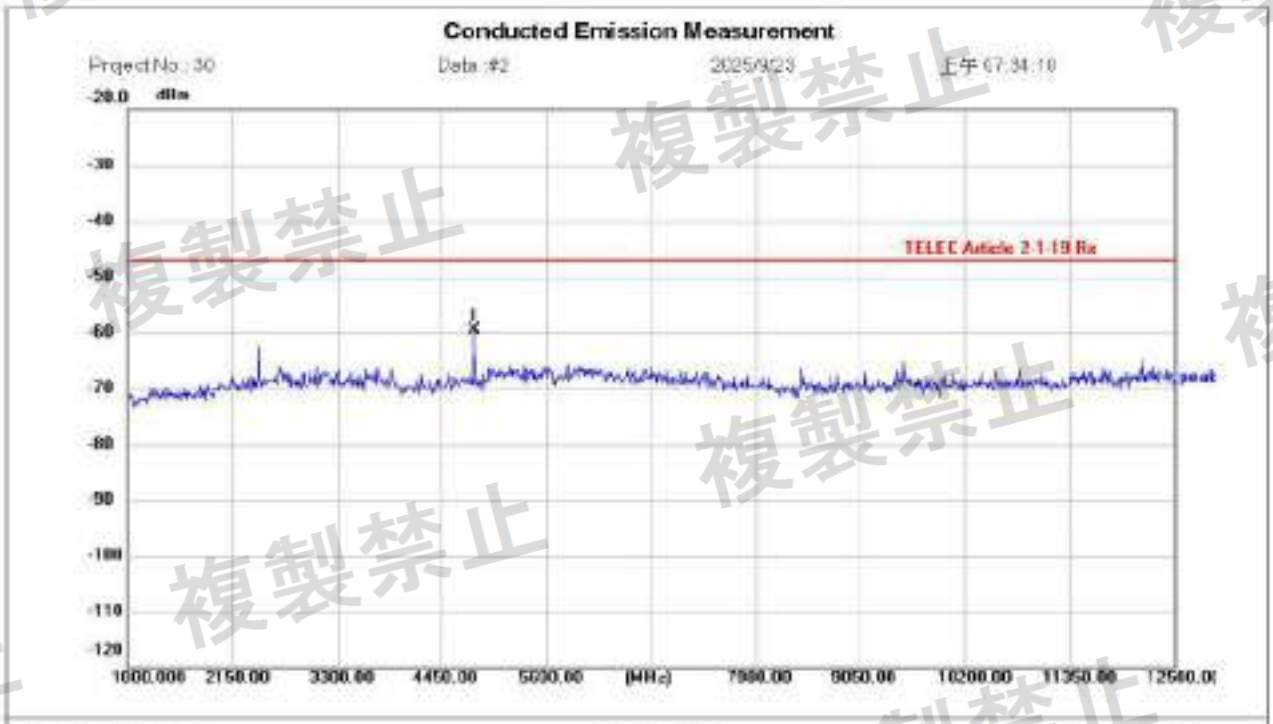


Site: Chamber 04
Limit: TELEC Artide 2-1-19 Rx
EUT: W6M22508-24659
M/N:
Mode: Rx BLE 1M CH00
Note:

Polarization:
Power: 3 VDC
Distance:

Temperature: 23.8 (°C)
Humidity: 59 %RH

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	4806.500	-70.34	10.60	-59.74	-47.00	-12.74	peak			P	

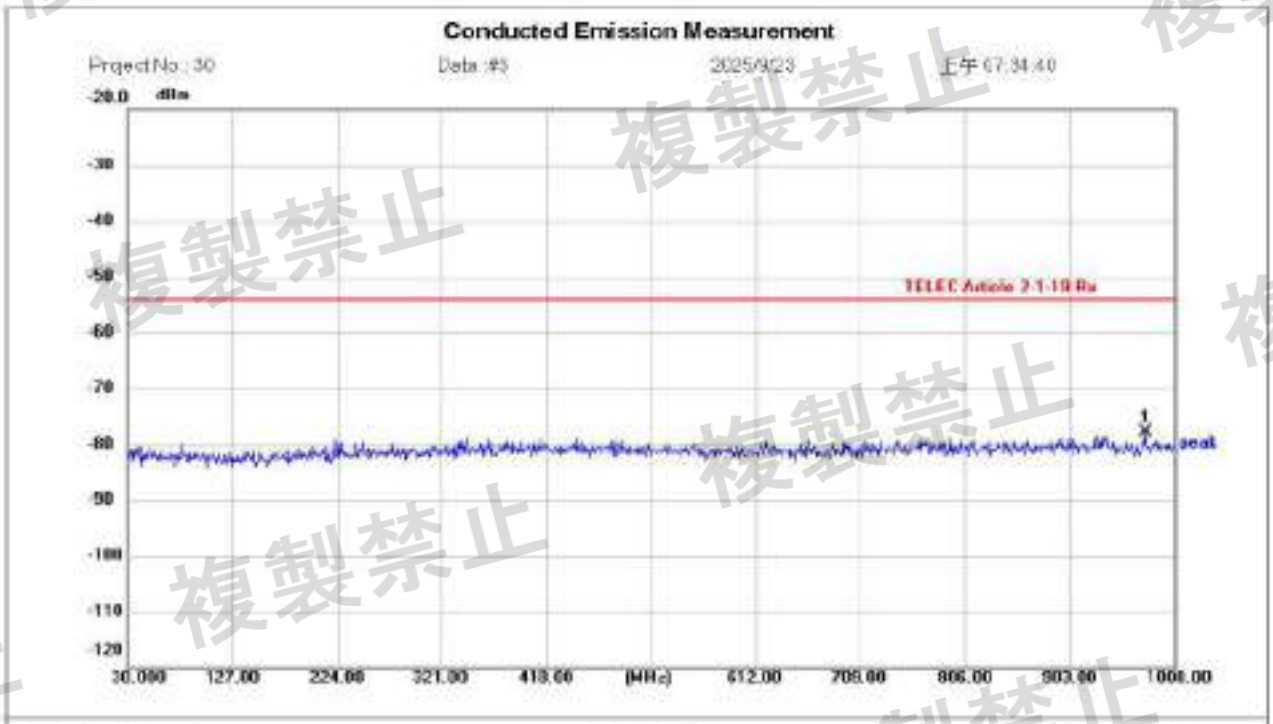


Site: Chamber 04
Limit: TELEC Artide 2-1-19 Rx
EUT: W6M22508-24659
M/N:
Mode: Rx BLE 1M CH19
Note:

Polarization:
Power: 3 V0.6
Distance:

Temperature: 23.8 (°C)
Humidity: 50 %RH

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	972.8400	-88.02	10.14	-77.88	-54.00	-23.88	peak			P	

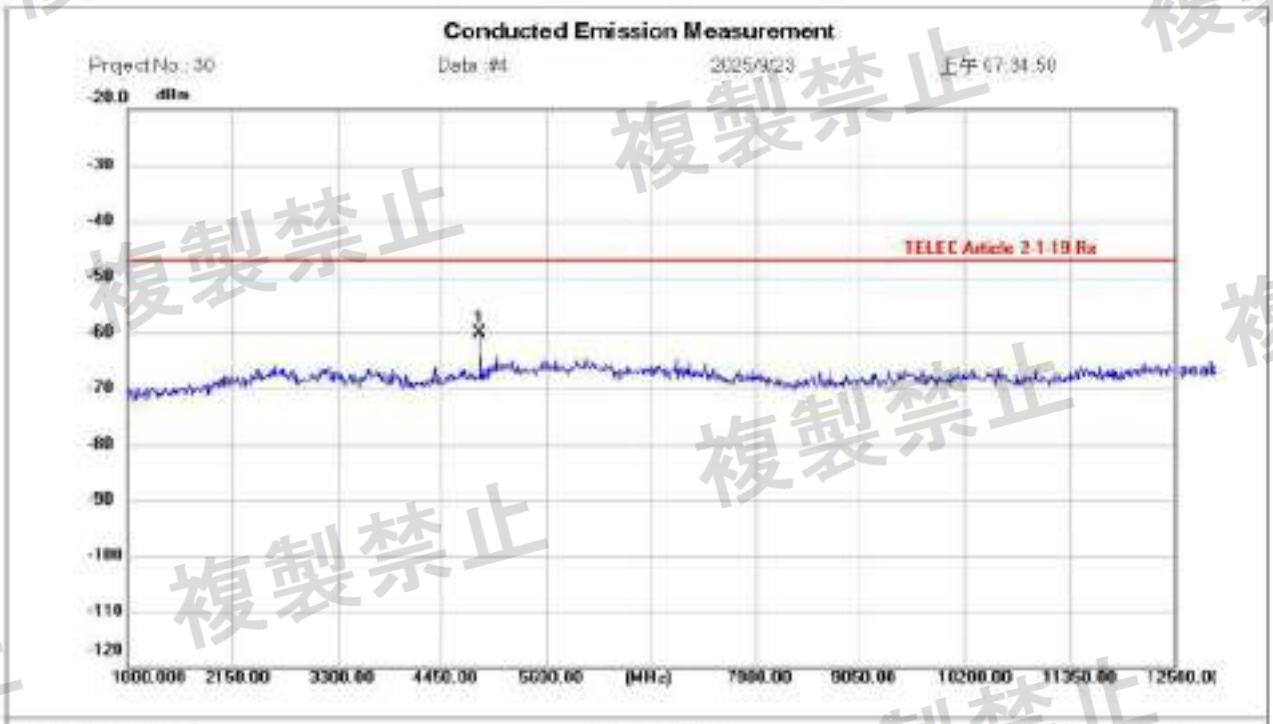


Site: Chamber 04
Limit: TELEC Artide 2-1-19 Rx
EUT: W6M22508-24659
M/N:
Mode: Rx BLE 1M CH19
Note:

Polarization:
Power: 3 VDC
Distance:

Temperature: 23.8 (°C)
Humidity: 50 %RH

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	4875.500	-70.62	10.57	-60.05	-47.00	-13.05	peak			P	

Conducted Emission Measurement

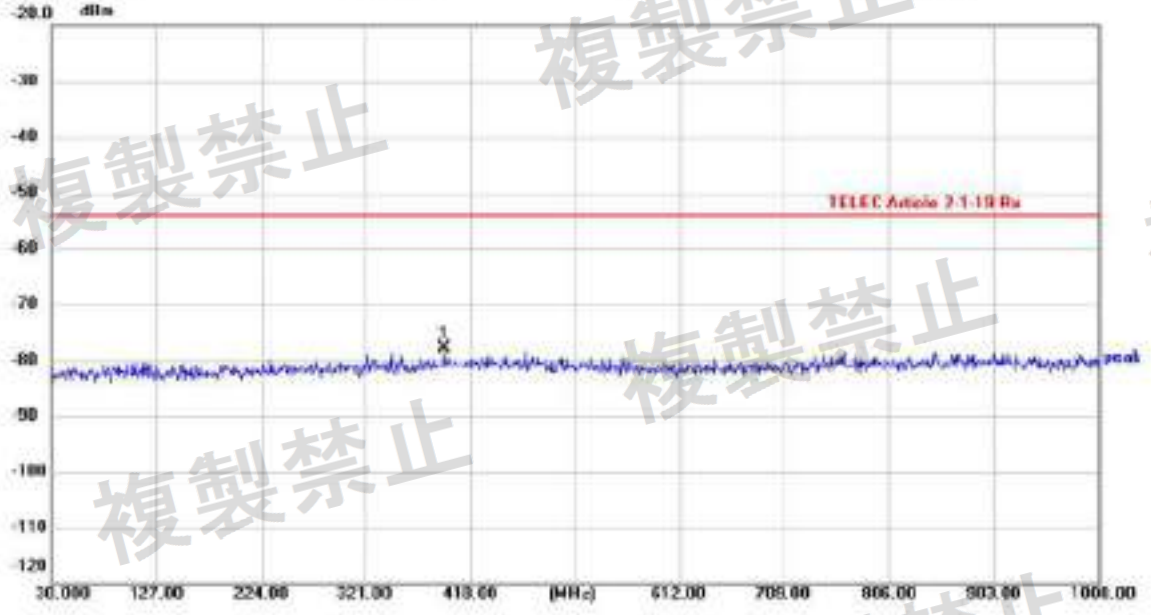


Site: Chamber 04
Limit: TELEC Artide 2-1-19 Rx
EUT: W6M22508-24659
M/N:
Mode: Rx BLE 1M CH39
Note:

Polarization:
Power: 3 V0.c.
Distance:

Temperature: 23.8 (°C)
Humidity: 50 %RH

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	393.7500	-88.00	10.01	-77.99	-54.00	-23.99	peak			P	

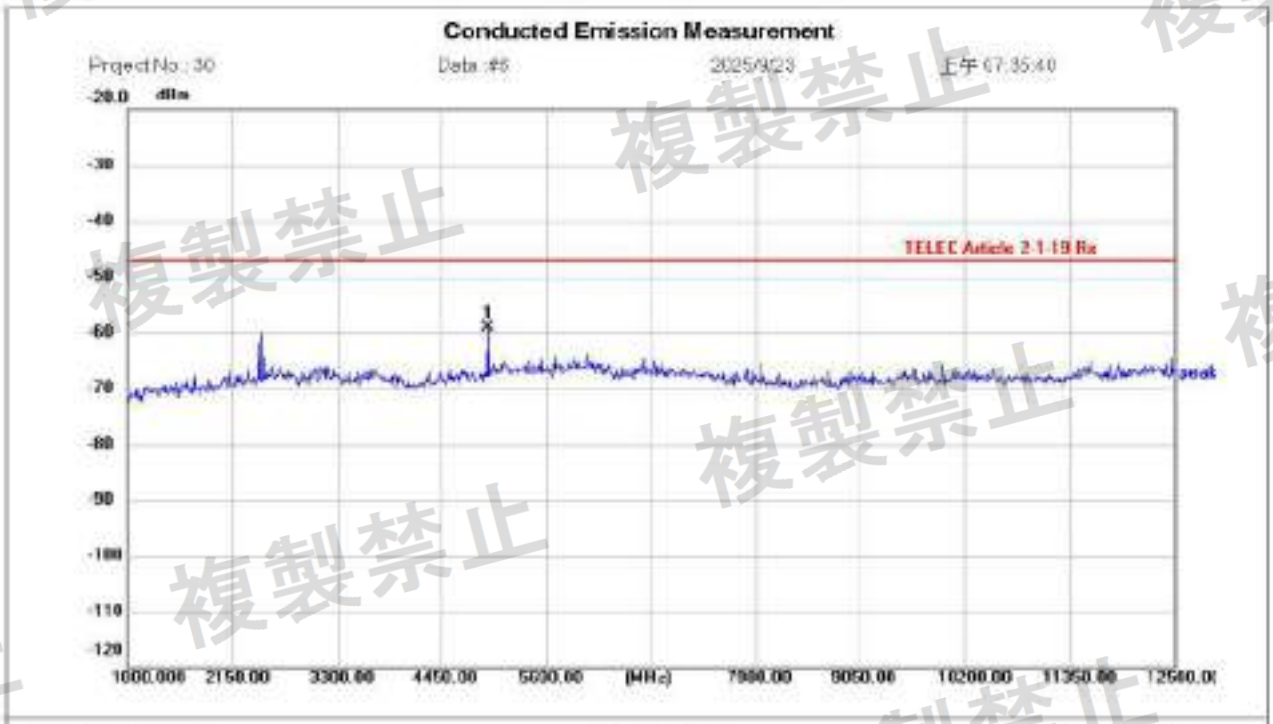


Site: Chamber 04
Limit: TELEC Artide 2-1-19 Rx
EUT: W6M22508-24659
M/N:
Mode: Rx BLE 1M CH39
Note:

Polarization:
Power: 3 VDC
Distance:

Temperature: 23.8 (°C)
Humidity: 59 %RH

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	4956.000	-69.71	10.61	-59.10	-47.00	-12.10	peak			P	

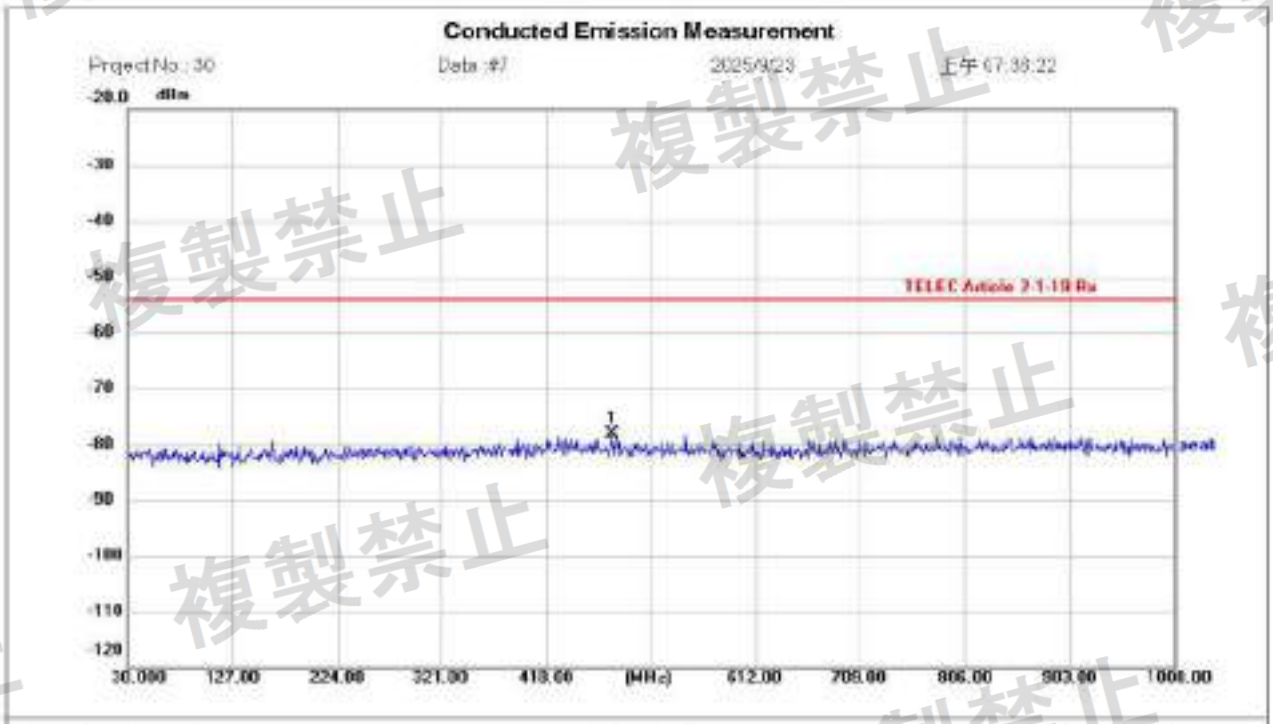


Site: Chamber 04
Limit: TELEC Artide 2-1-19 Rx
EUT: W6M22508-24659
M/N:
Mode: Rx BLE 2M CH39
Note:

Polarization:
Power: 3 V0.6
Distance:

Temperature: 23.8 (°C)
Humidity: 50 %RH

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	479.1100	-88.27	10.03	-78.24	-54.00	-24.24	peak			P	

Conducted Emission Measurement

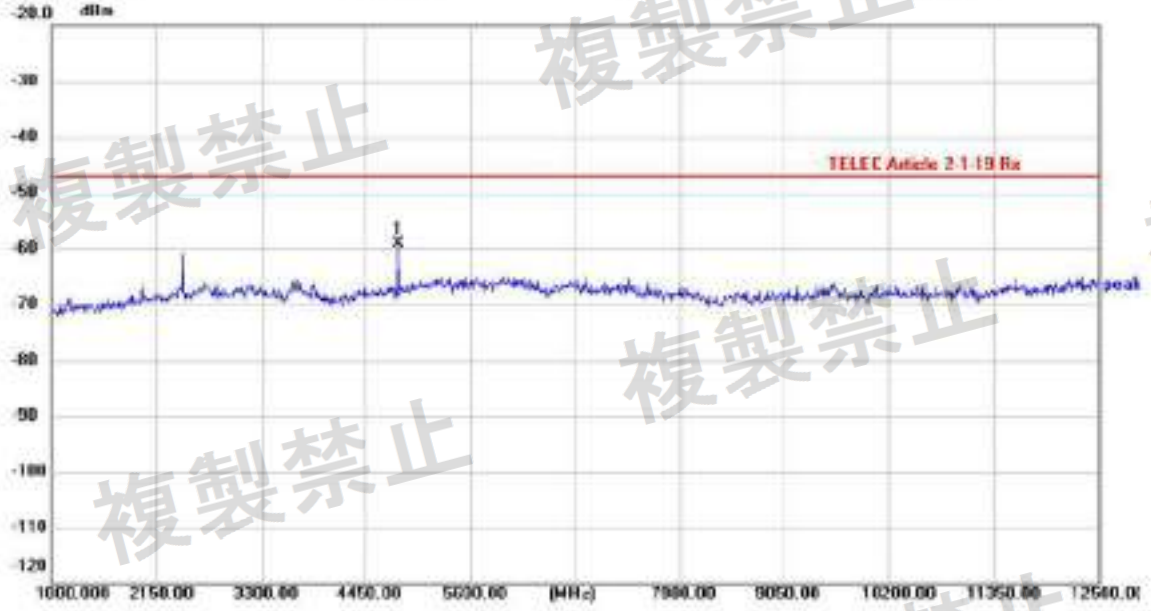


Site: Chamber 04
Limit: TELEC Artide 2-1-19 Rx
EUT: W6M22508-24659
M/N:
Mode: Rx BLE 2M CH39
Note:

Polarization:
Power: 3 VDC
Distance:

Temperature: 23.8 (°C)
Humidity: 59 %RH

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	4806.500	-69.83	10.60	-59.23	-47.00	-12.23	peak			P	

Conducted Emission Measurement

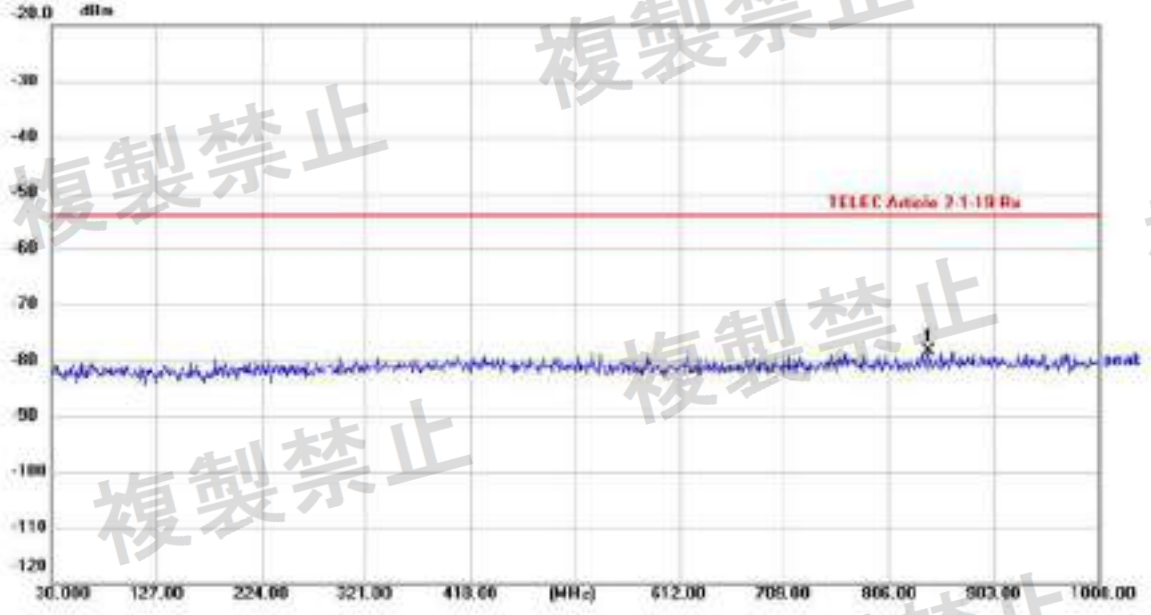


Site: Chamber 04
Limit: TELEC Artide 2-1-19 Rx
EUT: W6M22508-24659
M/N:
Mode: Rx BLE 2M CH19
Note:

Polarization:
Power: 3 V0.c.
Distance:

Temperature: 23.8 (°C)
Humidity: 50 %RH

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	842.8600	-88.49	10.14	-78.35	-54.00	-24.35	peak			P	

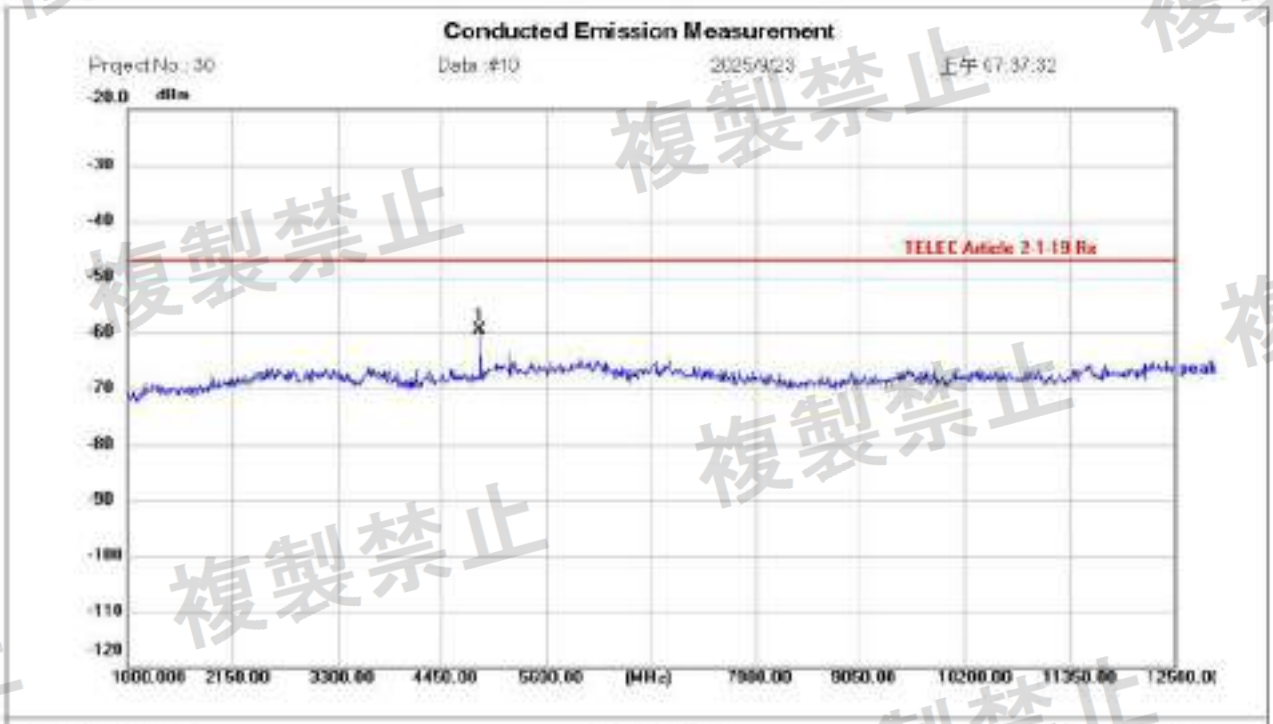


Site: Chamber 04
Limit: TELEC Artide 2-1-19 Rx
EUT: W6M22508-24659
M/N:
Mode: Rx BLE 2M CH19
Note:

Polarization:
Power: 3 VDC
Distance:

Temperature: 23.8 (°C)
Humidity: 59 %RH

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	4875.500	-70.22	10.57	-59.65	-47.00	-12.65	peak			P	

Conducted Emission Measurement

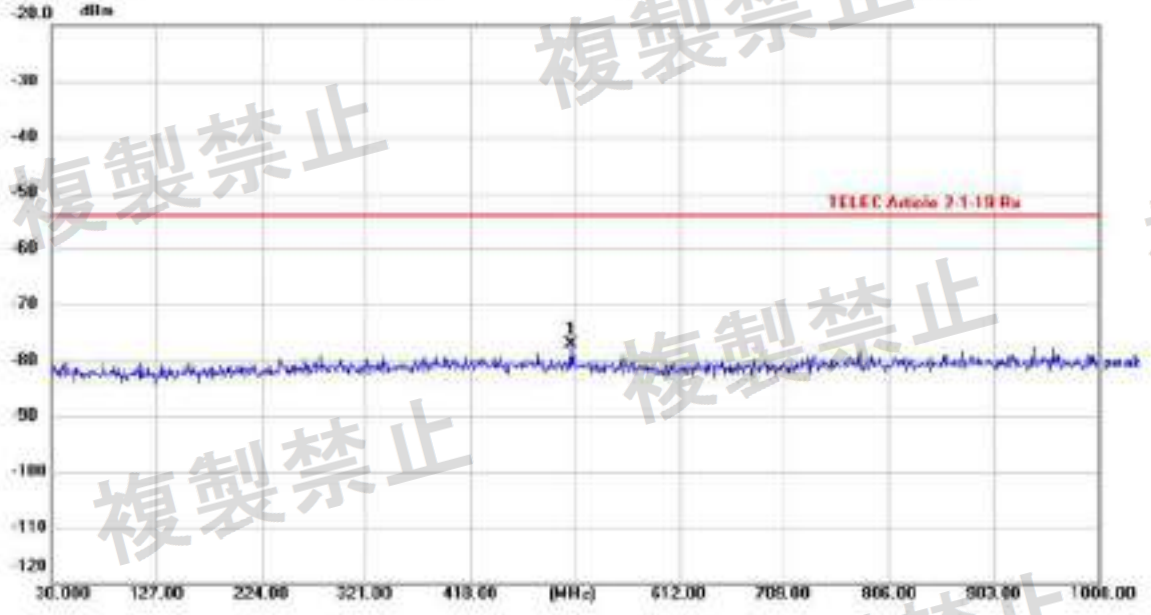


Site: Chamber 04
Limit: TELEC Artide 2-1-19 Rx
EUT: W6M22508-24659
M/N:
Mode: Rx BLE 2M CH39
Note:

Polarization:
Power: 3 V0.c.
Distance:

Temperature: 23.8 (°C)
Humidity: 50 %RH

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	511.1200	-87.07	10.03	-77.04	-54.00	-23.04	peak			P	

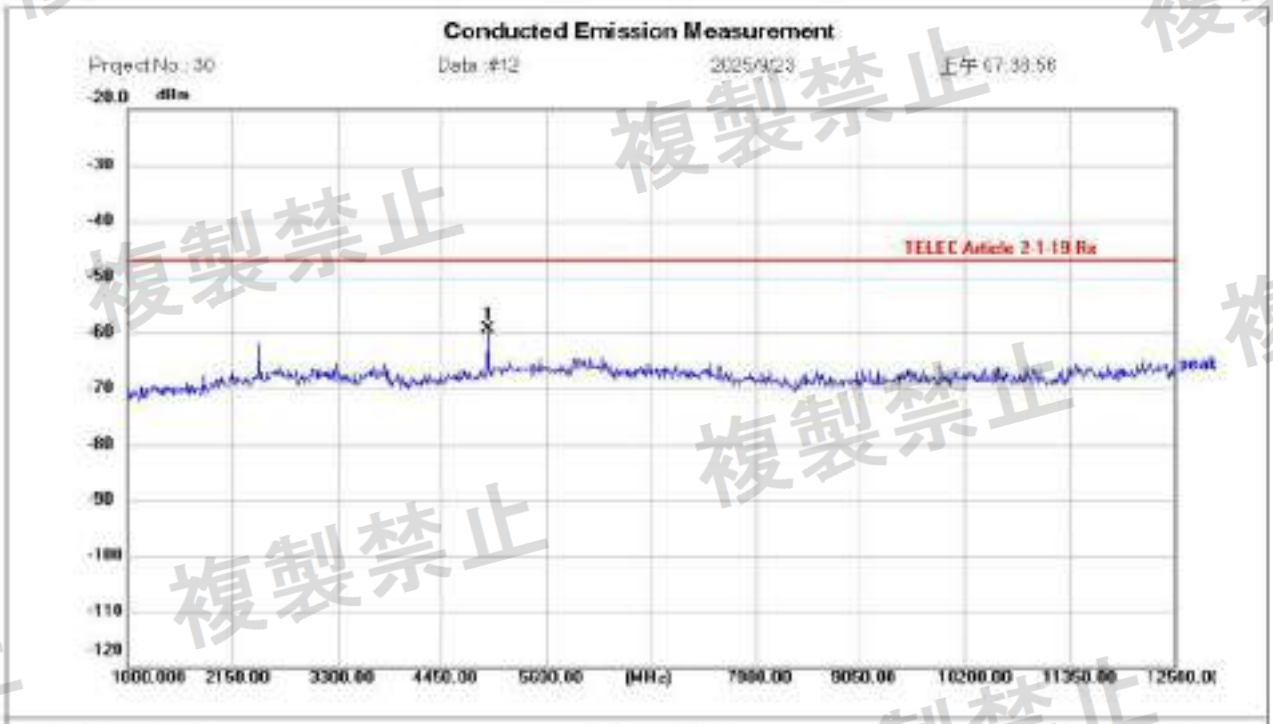


Site: Chamber 04
Limit: TELEC Artide 2-1-19 Rx
EUT: W6M22508-24659
M/N:
Mode: Rx BLE 2M CH39
Note:

Polarization:
Power: 3 VDC
Distance:

Temperature: 23.8 (°C)
Humidity: 59 %RH

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	4956.000	-69.90	10.61	-59.29	-47.00	-12.29	peak			P	

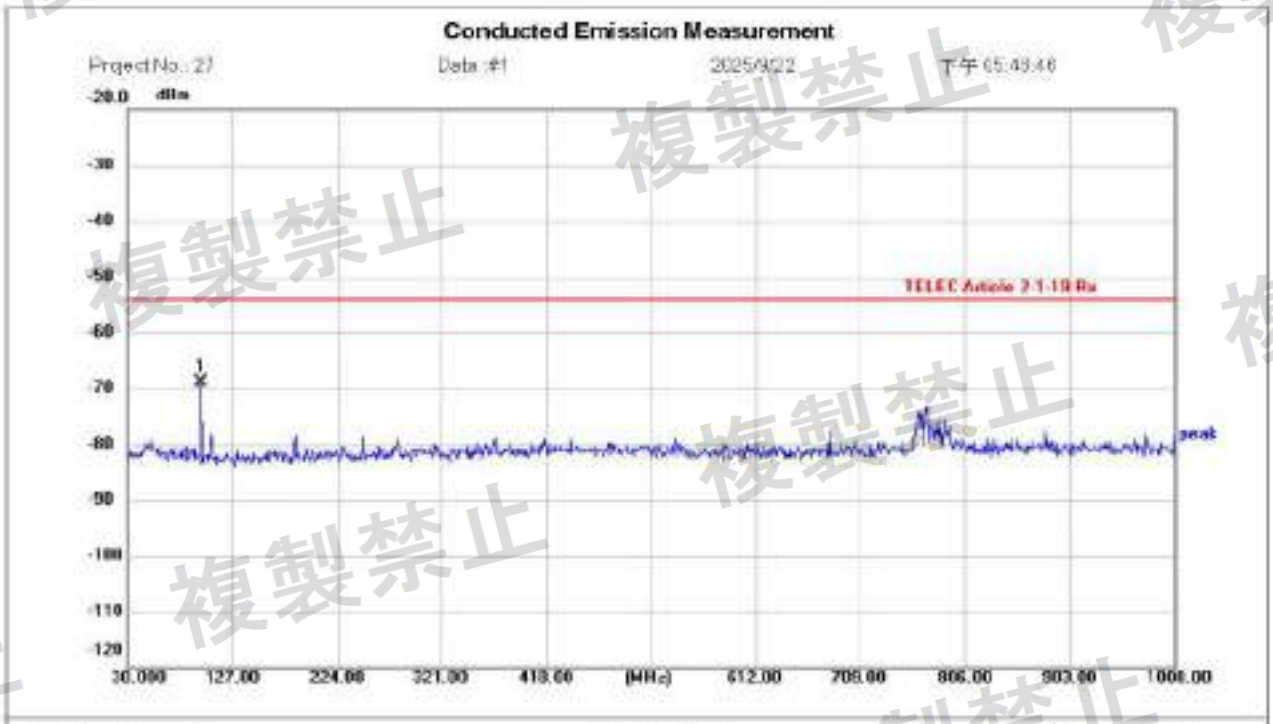


Site: Chamber 04
Limit: TELEC Artide 2-1-19 Rx
EUT: W6M22508-24659
M/N:
Mode: Rx BLE 1M CH00
Note:

Polarization:
Power: 2.7 Vdc
Distance:

Temperature: 23.8 (°C)
Humidity: 50 %RH

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	97.9000	-78.80	9.88	-68.92	-54.00	-14.92	peak			P	

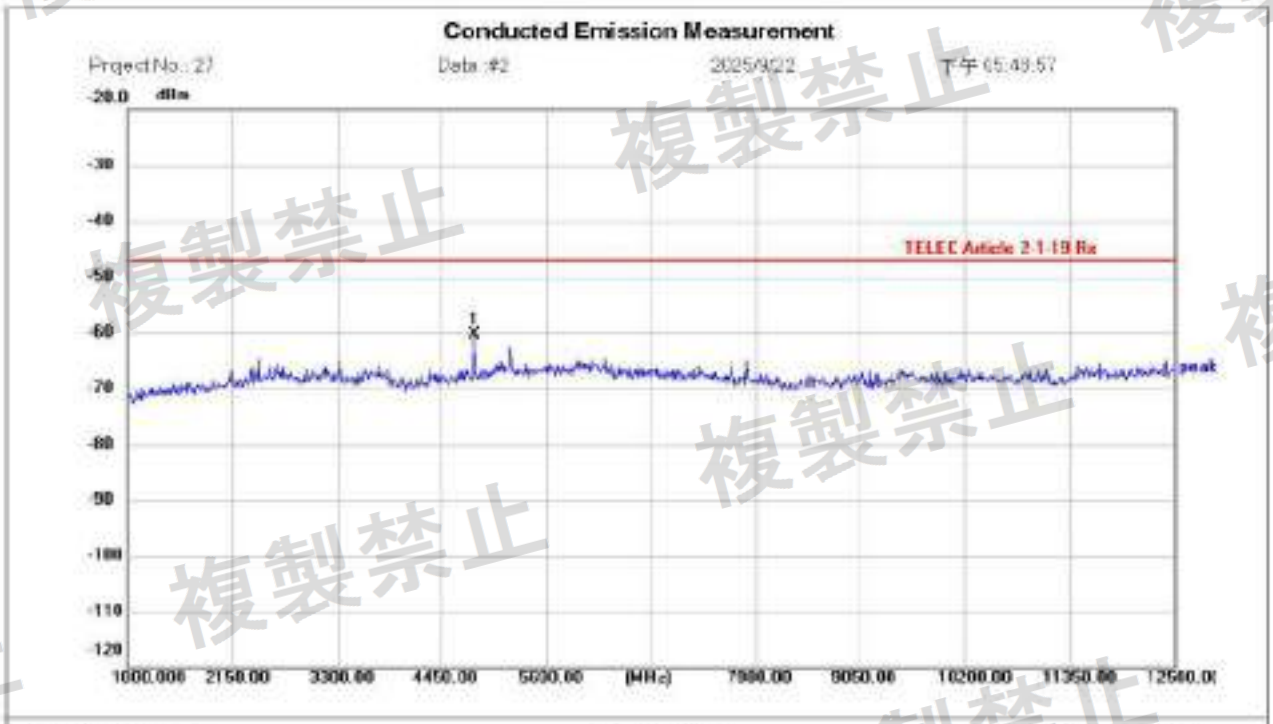


Site: Chamber 04
Limit: TELEC Artide 2-1-19 Rx
EUT: W6M22508-24659
M/N:
Mode: Rx BLE 1M CH00
Note:

Polarization:
Power: 2.7 Vdc
Distance:

Temperature: 23.8 (°C)
Humidity: 50 %RH

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	4806.500	-70.92	10.60	-60.32	-47.00	-13.32	peak			P	

Conducted Emission Measurement

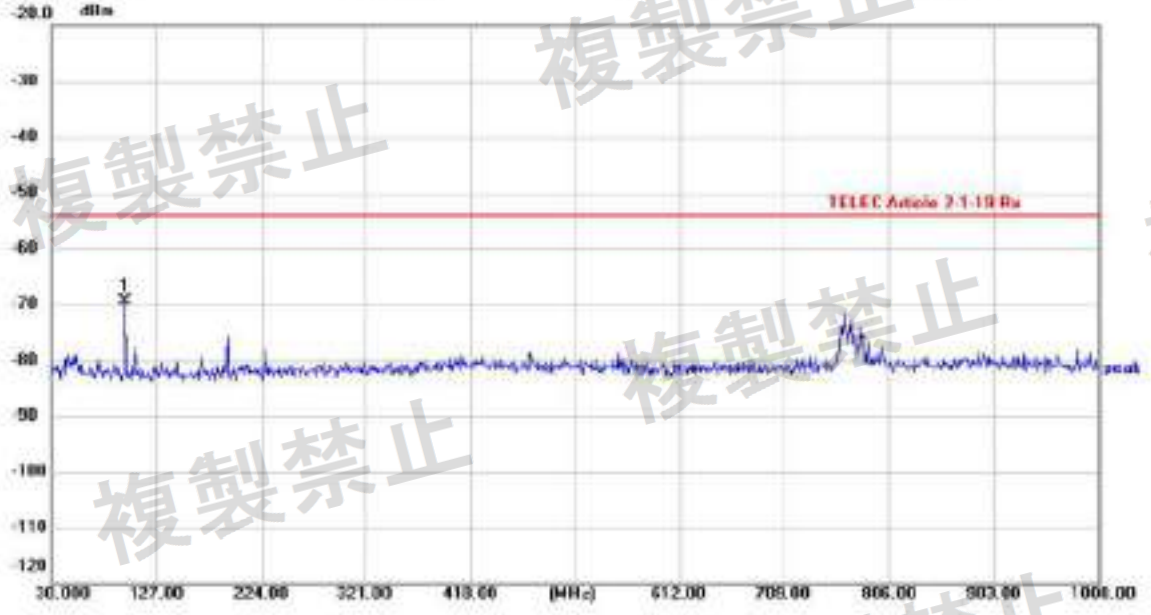


Site: Chamber 04
Limit: TELEC Artide 2-1-19 Rx
EUT: W6M22508-24659
M/N:
Mode: Rx BLE 1M CH19
Note:

Polarization:
Power: 2.7 Vdc
Distance:

Temperature: 23.8 (°C)
Humidity: 50 %RH

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	97.9000	-79.31	9.88	-69.43	-54.00	-15.43	peak			P	

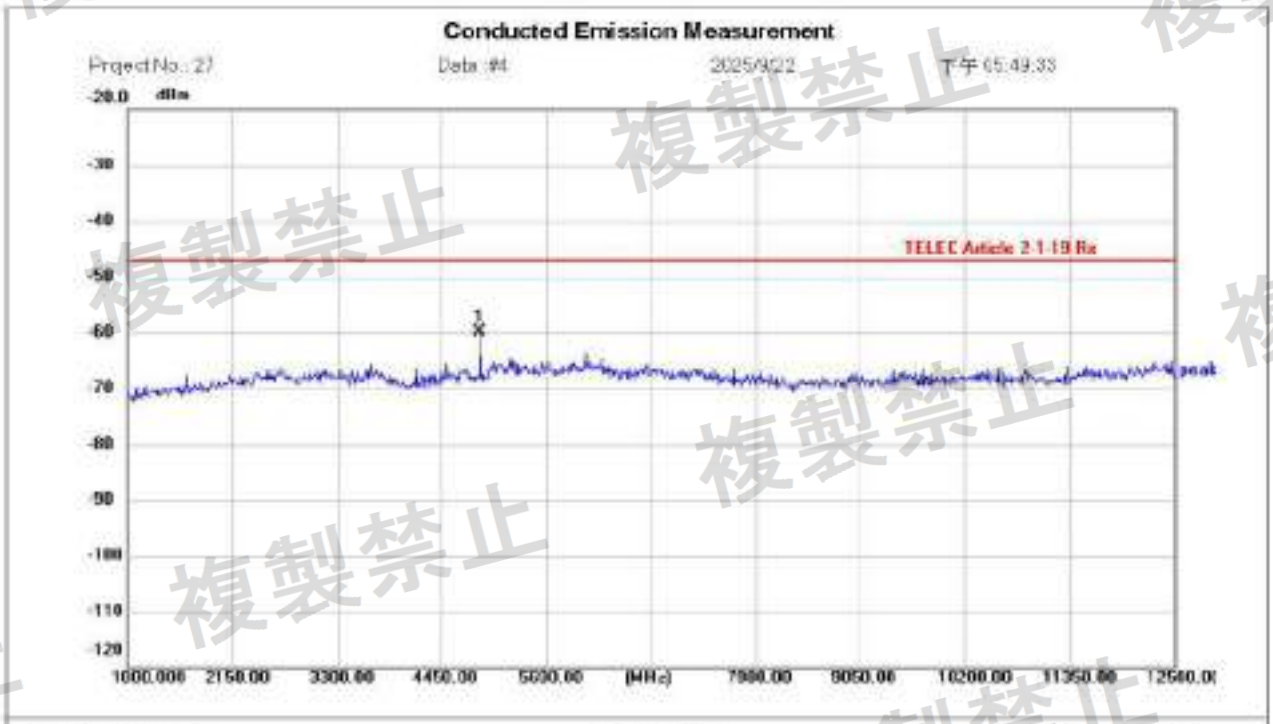


Site: Chamber 04
Limit: TELEC Artide 2-1-19 Rx
EUT: W6M22508-24659
M/N:
Mode: Rx BLE 1M CH19
Note:

Polarization:
Power: 2.7 Vdc
Distance:

Temperature: 23.8 (°C)
Humidity: 59 %RH

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	4875.500	-70.41	10.57	-59.84	-47.00	-12.84	peak			P	

Conducted Emission Measurement

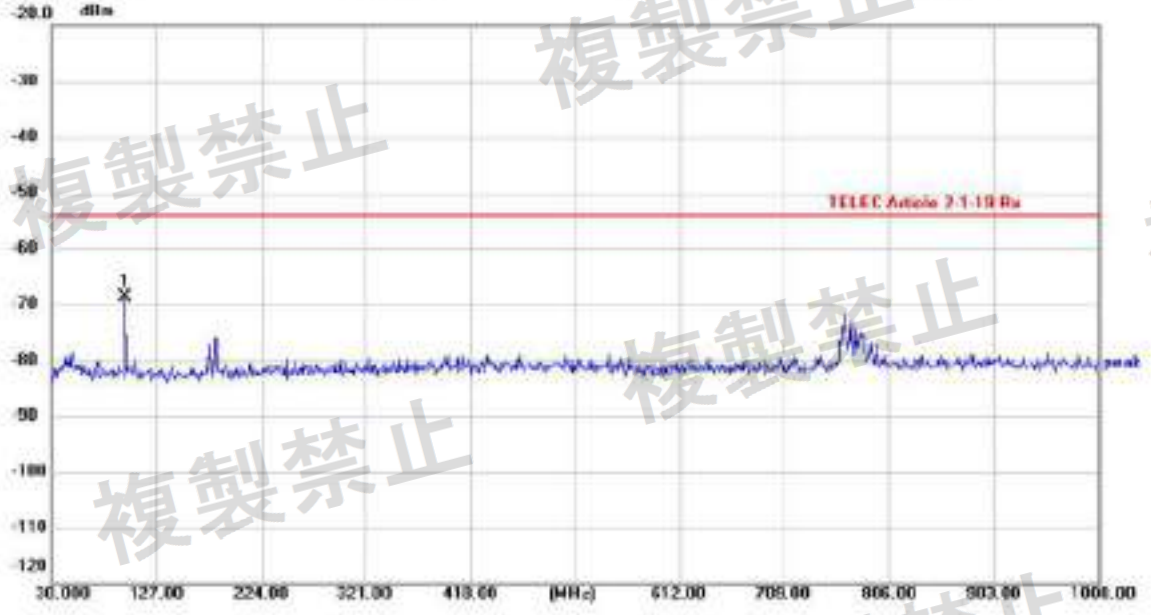


Site: Chamber 04
Limit: TELEC Artide 2-1-19 Rx
EUT: W6M22508-24659
M/N:
Mode: Rx BLE 1M CH39
Note:

Polarization:
Power: 2.7 Vdc
Distance:

Temperature: 23.8 (°C)
Humidity: 50 %RH

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	97.9000	-78.38	9.88	-68.50	-54.00	-14.50	peak			P	

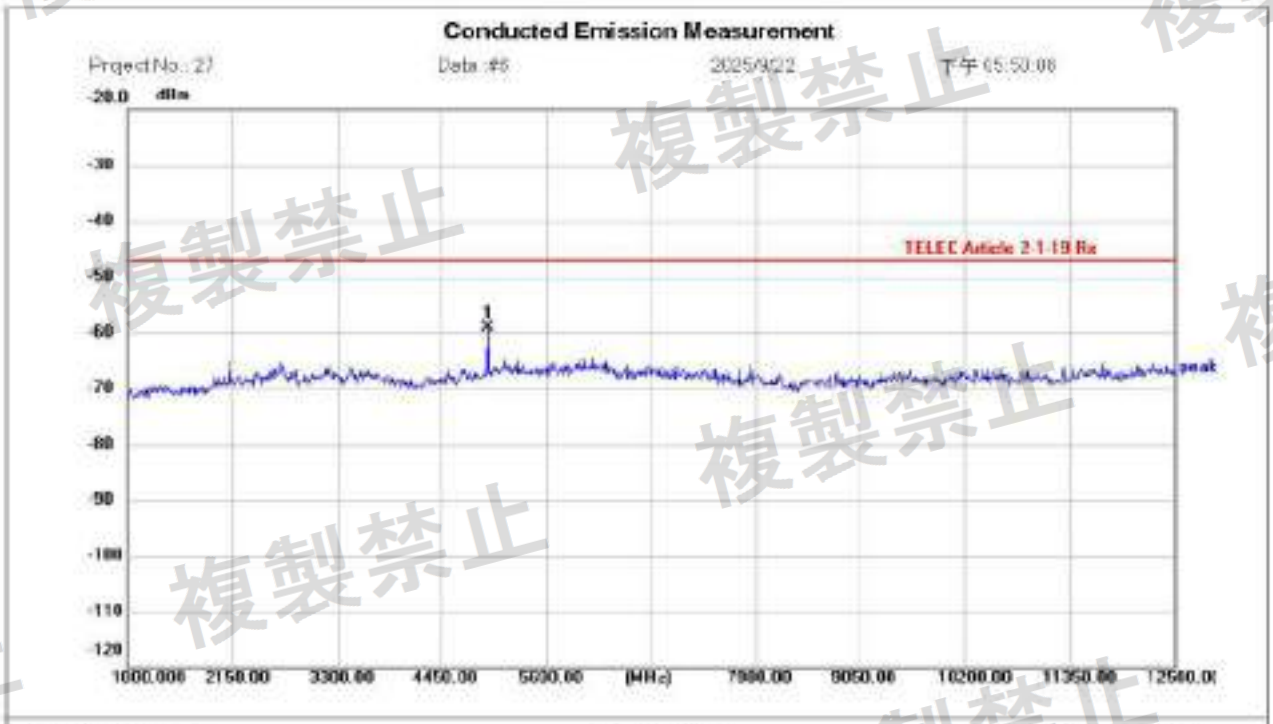


Site: Chamber 04
Limit: TELEC Artide 2-1-19 Rx
EUT: W6M22508-24659
M/N:
Mode: Rx BLE 1M CH39
Note:

Polarization:
Power: 2.7 Vdc
Distance:

Temperature: 23.8 (°C)
Humidity: 59 %RH

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	4956.000	-69.78	10.61	-59.17	-47.00	-12.17	peak			P	

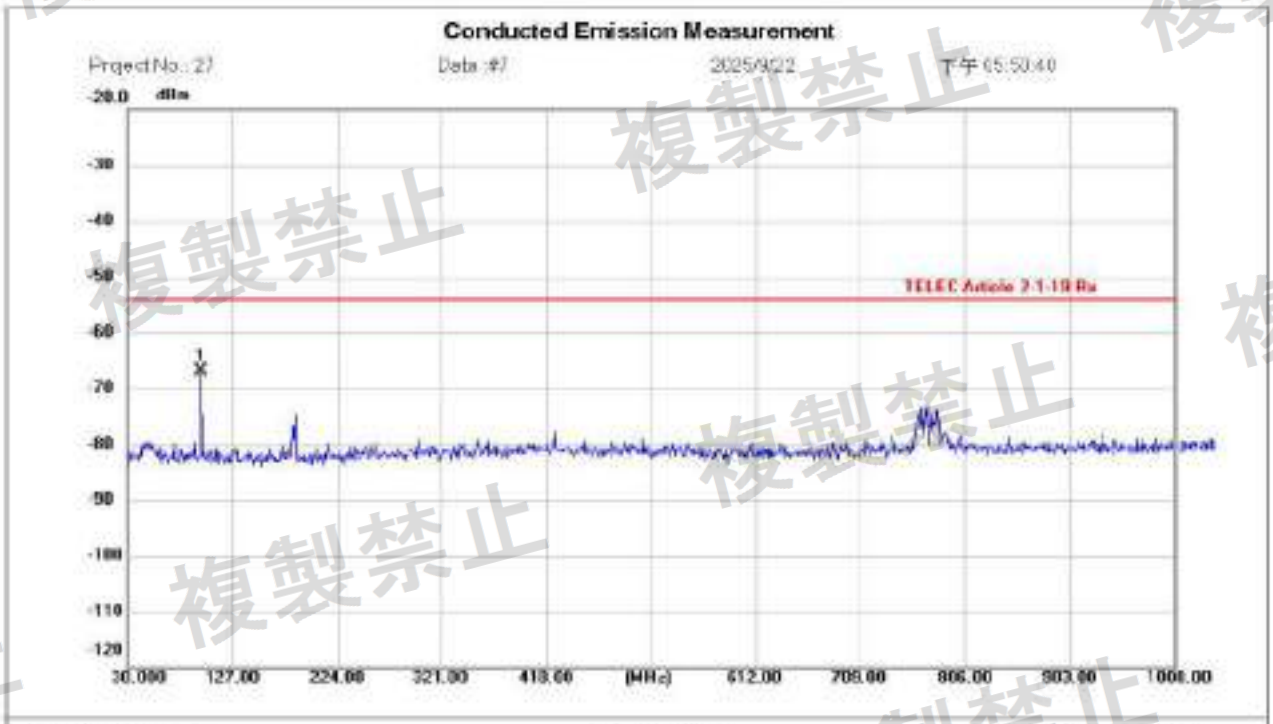


Site: Chamber 04
Limit: TELEC Artide 2-1-19 Rx
EUT: W6M22508-24659
M/N:
Mode: Rx BLE 2M CH00
Note:

Polarization:
Power: 2.7 Vdc
Distance:

Temperature: 23.8 (°C)
Humidity: 50 %RH

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	97.9000	-76.73	9.88	-66.85	-54.00	-12.85	peak			P	

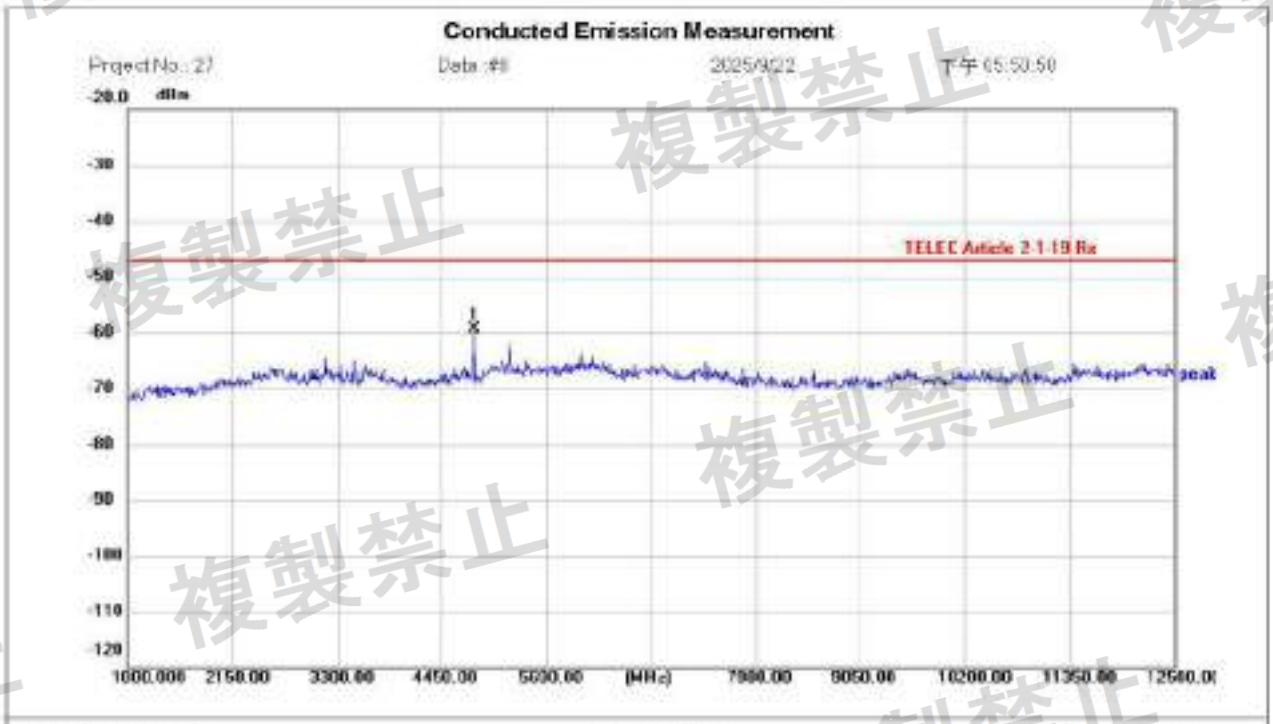


Site: Chamber 04
Limit: TELEC Artide 2-1-19 Rx
EUT: W6M22508-24659
M/N:
Mode: Rx BLE 2M CH00
Note:

Polarization:
Power: 2.7 Vdc
Distance:

Temperature: 23.8 (°C)
Humidity: 50 %RH

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	4806.500	-69.97	10.60	-59.37	-47.00	-12.37	peak			P	

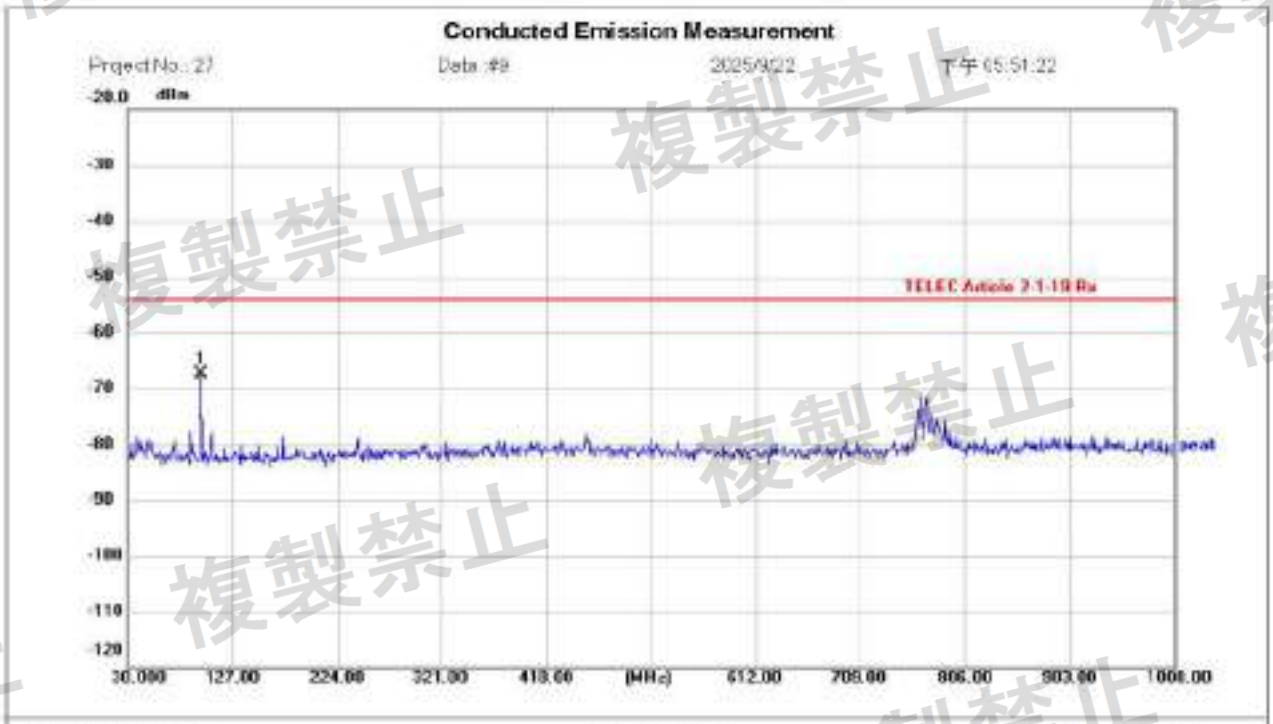


Site: Chamber 04
Limit: TELEC Artide 2-1-19 Rx
EUT: W6M22508-24659
M/N:
Mode: Rx BLE 2M CH19
Note:

Polarization:
Power: 2.7 Vdc
Distance:

Temperature: 23.8 (°C)
Humidity: 50 %RH

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	97.9000	-77.36	9.88	-67.48	-54.00	-13.48	peak			P	

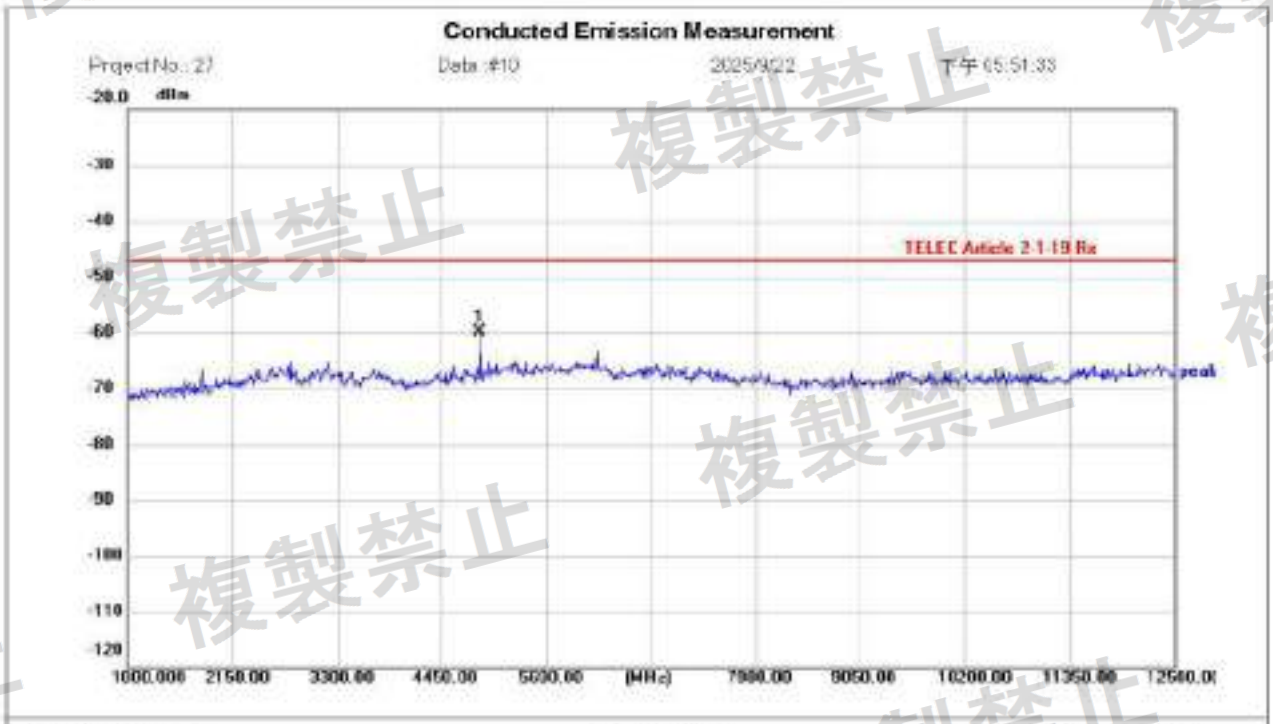


Site: Chamber 04
Limit: TELEC Artide 2-1-19 Rx
EUT: W6M22508-24659
M/N:
Mode: Rx BLE 2M CH19
Note:

Polarization:
Power: 2.7 Vdc
Distance:

Temperature: 23.8 (°C)
Humidity: 59 %RH

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	4875.500	-70.42	10.57	-59.85	-47.00	-12.85	peak			P	

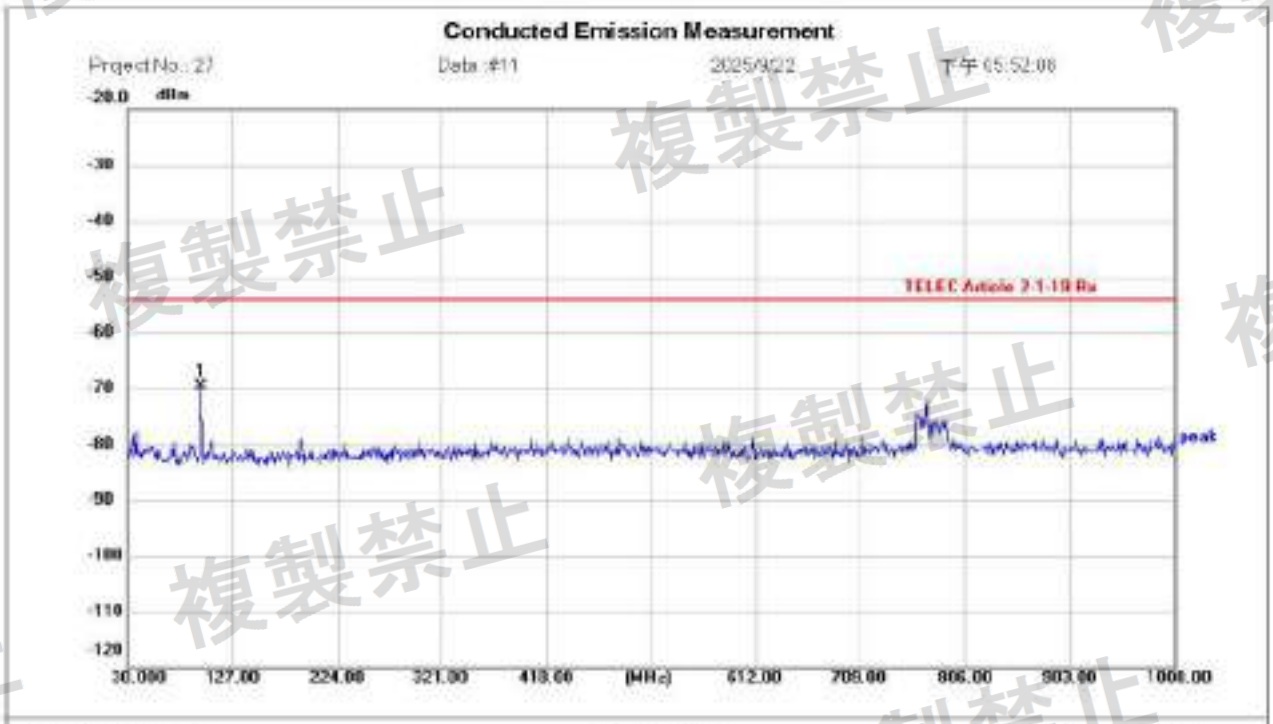


Site: Chamber 04
Limit: TELEC Artide 2-1-19 Rx
EUT: W6M22508-24659
M/N:
Mode: Rx BLE 2M CH39
Note:

Polarization:
Power: 2.7 Vdc
Distance:

Temperature: 23.8 (°C)
Humidity: 50 %RH

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	97.9000	-79.61	9.88	-69.73	-54.00	-15.73	peak			P	

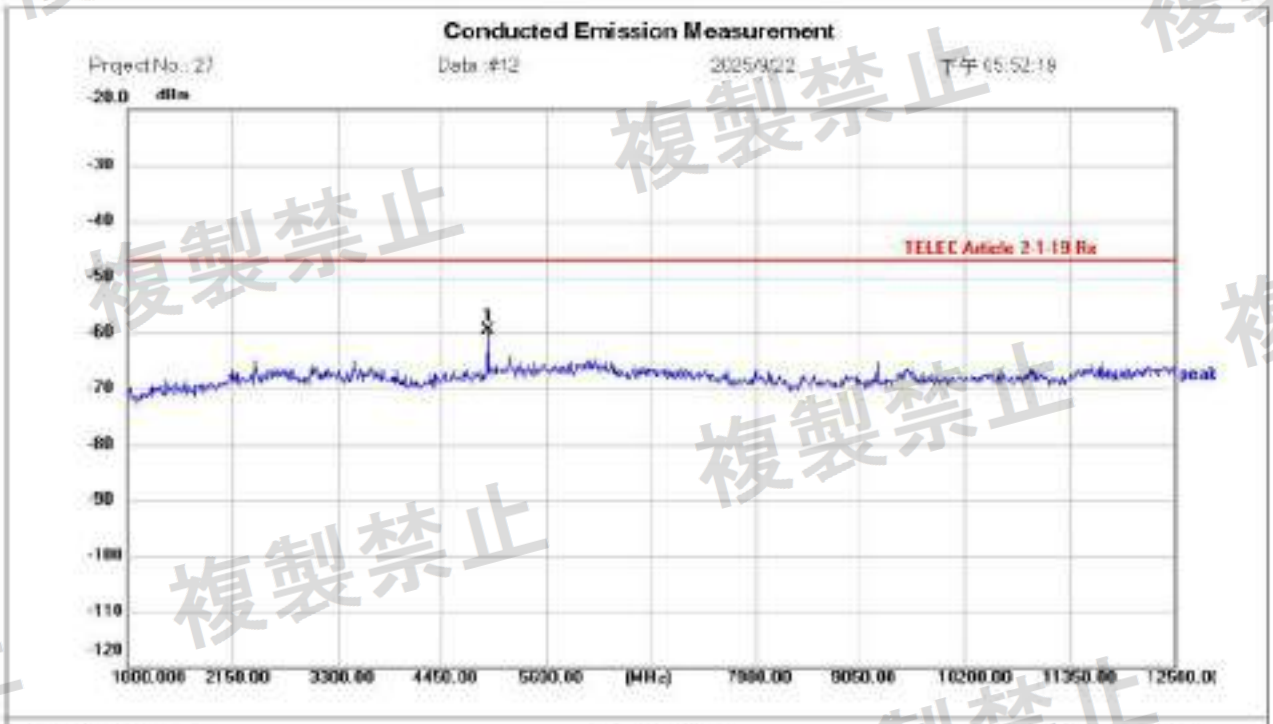


Site Chamber 04
Limit: TELEC Artide 2-1-19 Rx
EUT: W6M22508-24659
M/N:
Mode: Rx BLE 2M CH39
Note:

Polarization:
Power: 2.7 Vdc
Distance:

Temperature: 23.8 (°C)
Humidity: 59 %RH

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	4956.000	-70.29	10.61	-59.68	-47.00	-12.68	peak			P	

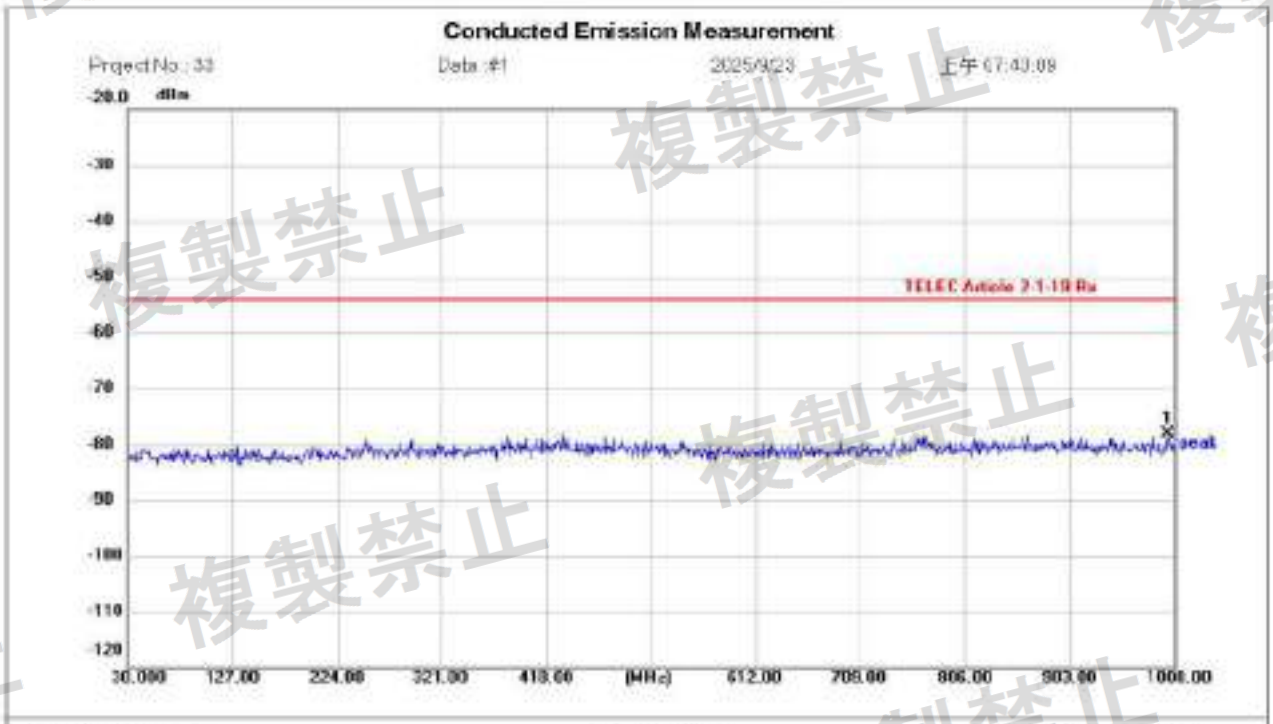


Site: Chamber 04
Limit: TELEC Artide 2-1-19 Rx
EUT: W6M22508-24659
M/N:
Mode: Rx BLE 1M CH00
Note:

Polarization:
Power: 3.3 Vdc
Distance:

Temperature: 23.8 (°C)
Humidity: 50 %RH

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	994.1800	-88.18	10.14	-78.04	-54.00	-24.04	peak			P	

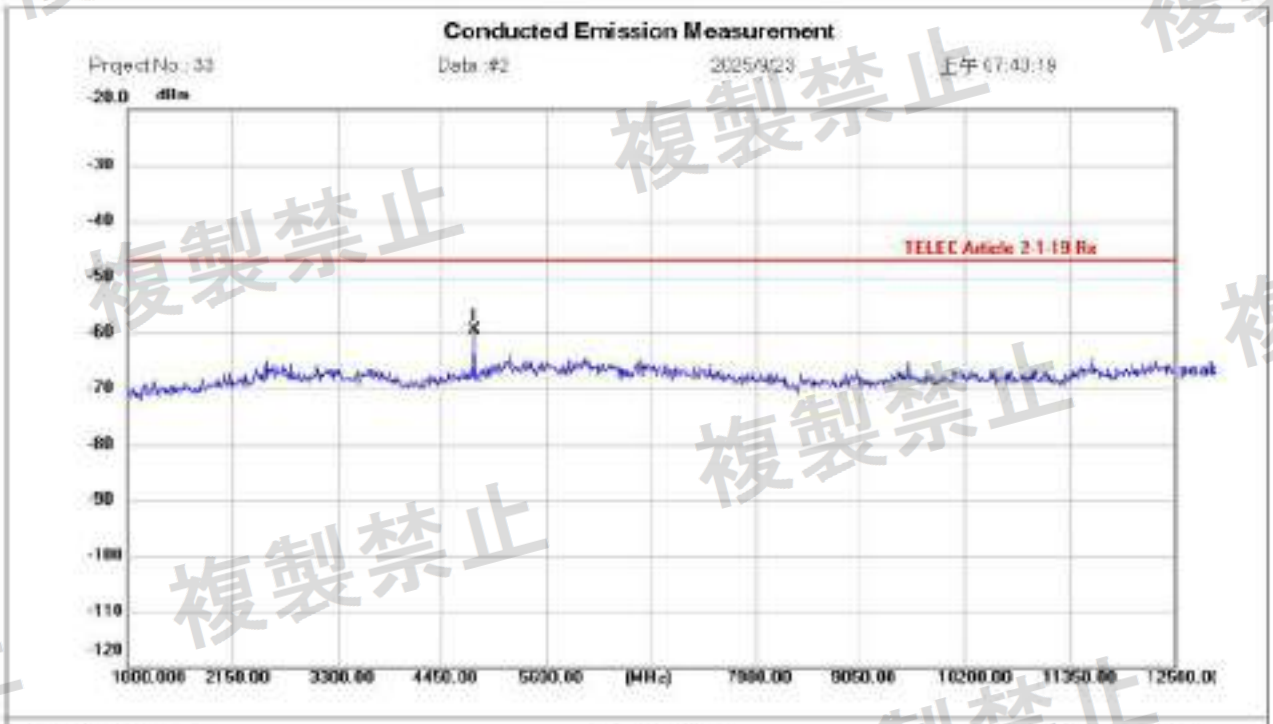


Site: Chamber 04
Limit: TELEC Artide 2-1-19 Rx
EUT: W6M22508-24659
M/N:
Mode: Rx BLE 1M CH00
Note:

Polarization:
Power: 3.3 Vdc
Distance:

Temperature: 23.8 (°C)
Humidity: 59 %RH

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	4806.500	-70.20	10.60	-59.60	-47.00	-12.60	peak			P	

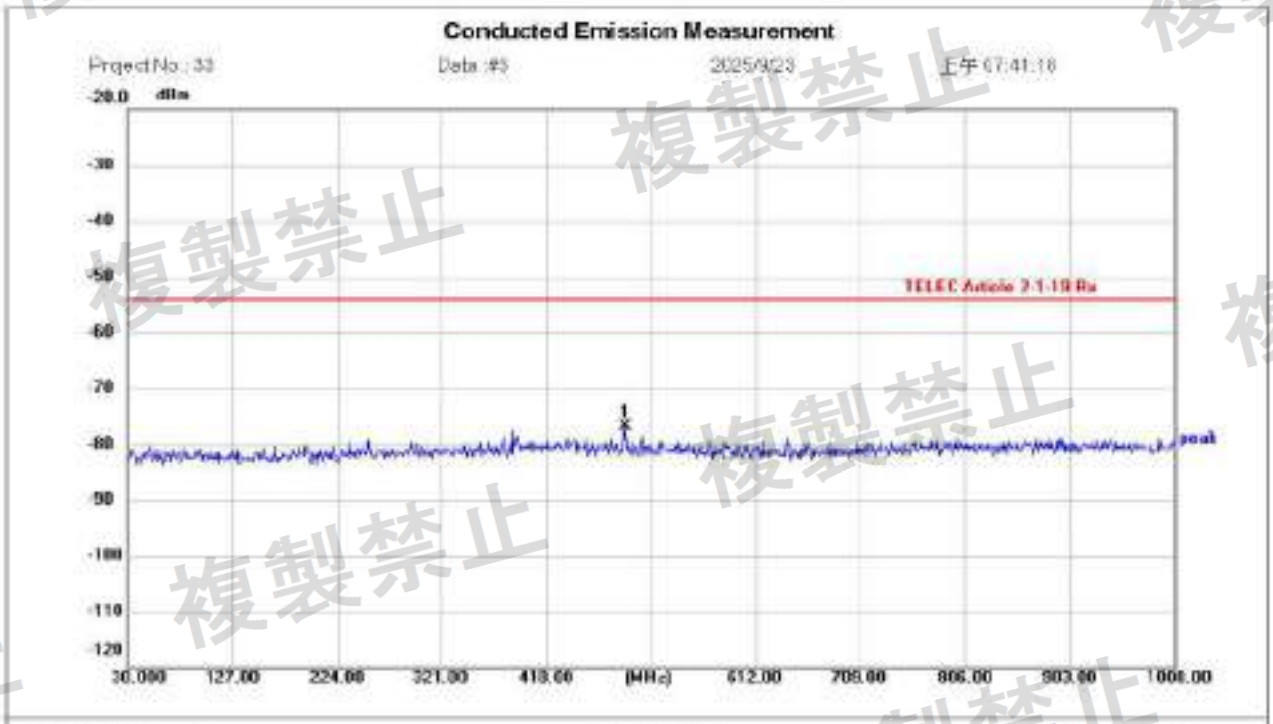


Site: Chamber 04
Limit: TELEC Artide 2-1-19 Rx
EUT: W6M22508-24659
M/N:
Mode: Rx BLE 1M CH19
Note:

Polarization:
Power: 3.3 Vdc
Distance:

Temperature: 23.8 (°C)
Humidity: 50 %RH

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	490.7500	-86.95	10.03	-76.92	-54.00	-22.92	peak			P	

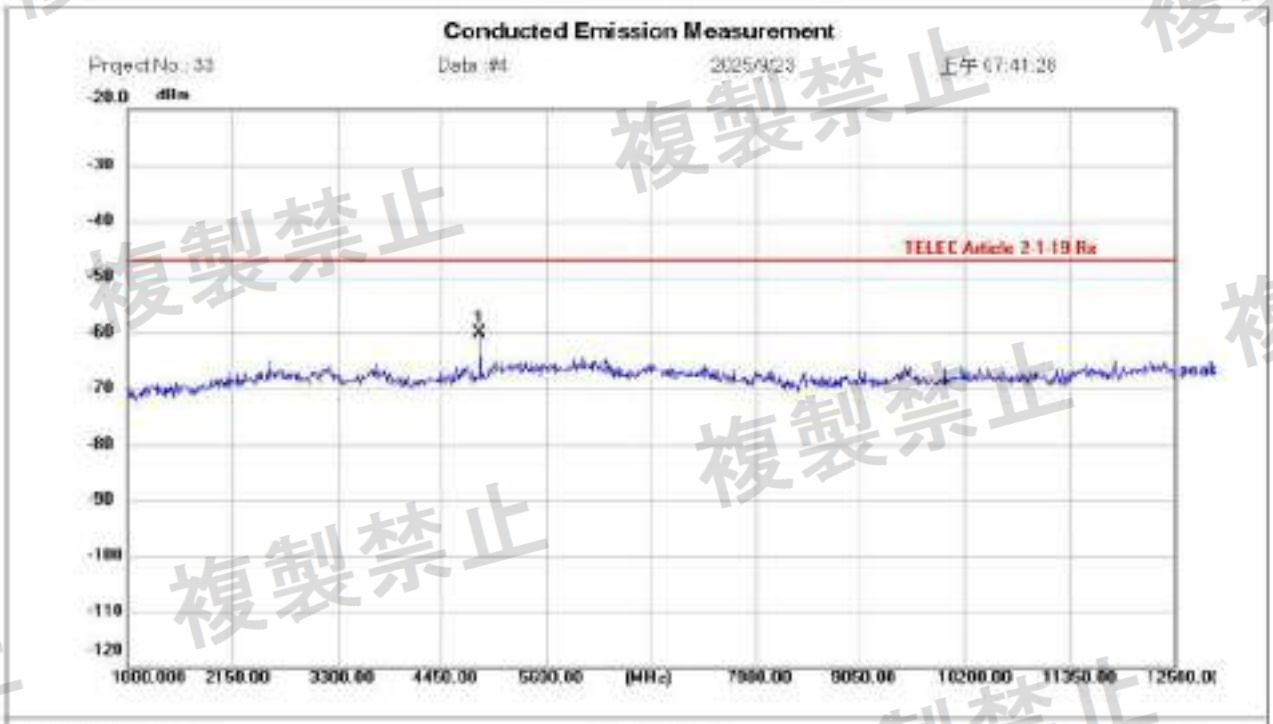


Site: Chamber 04
Limit: TELEC Artide 2-1-19 Rx
EUT: W6M22508-24659
M/N:
Mode: Rx BLE 1M CH19
Note:

Polarization:
Power: 3.3 Vdc
Distance:

Temperature: 23.8 (°C)
Humidity: 50 %RH

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	4875.500	-70.70	10.57	-60.13	-47.00	-13.13	peak			P	

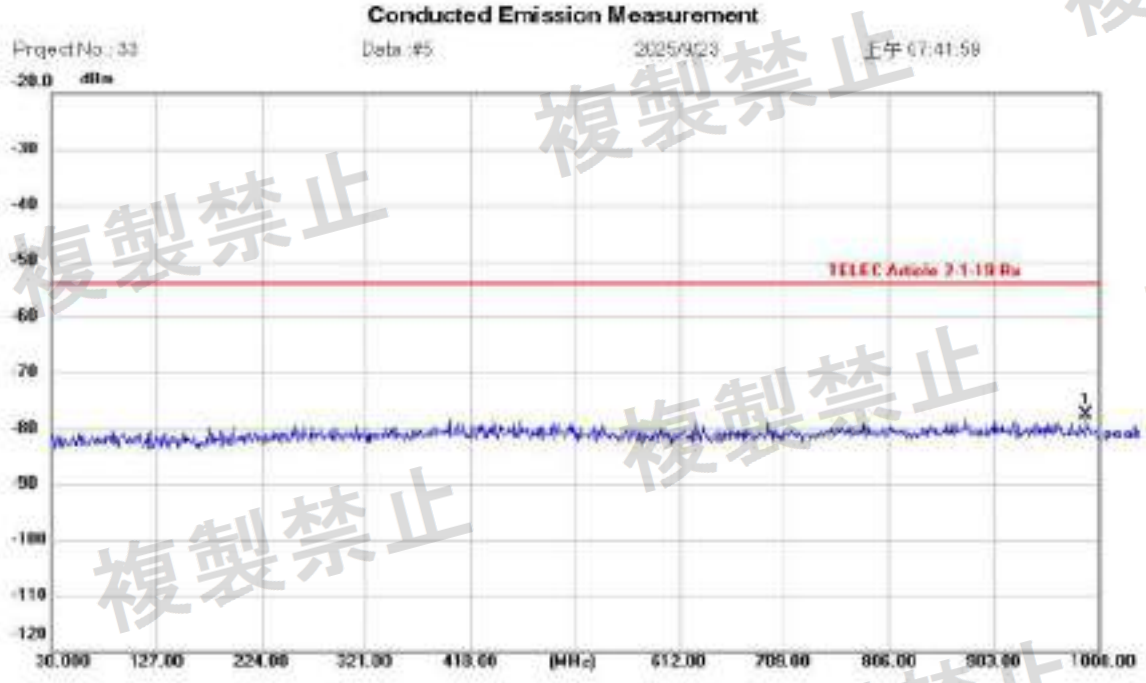


Site: Chamber 04
Limit: TELEC Artide 2-1-19 Rx
EUT: W6M22508-24659
M/N:
Mode: Rx BLE 1M CH39
Note:

Polarization:
Power: 3.3 Vdc
Distance:

Temperature: 23.8 (°C)
Humidity: 50 %RH

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	989.3300	-87.74	10.14	-77.60	-54.00	-23.60	peak			P	

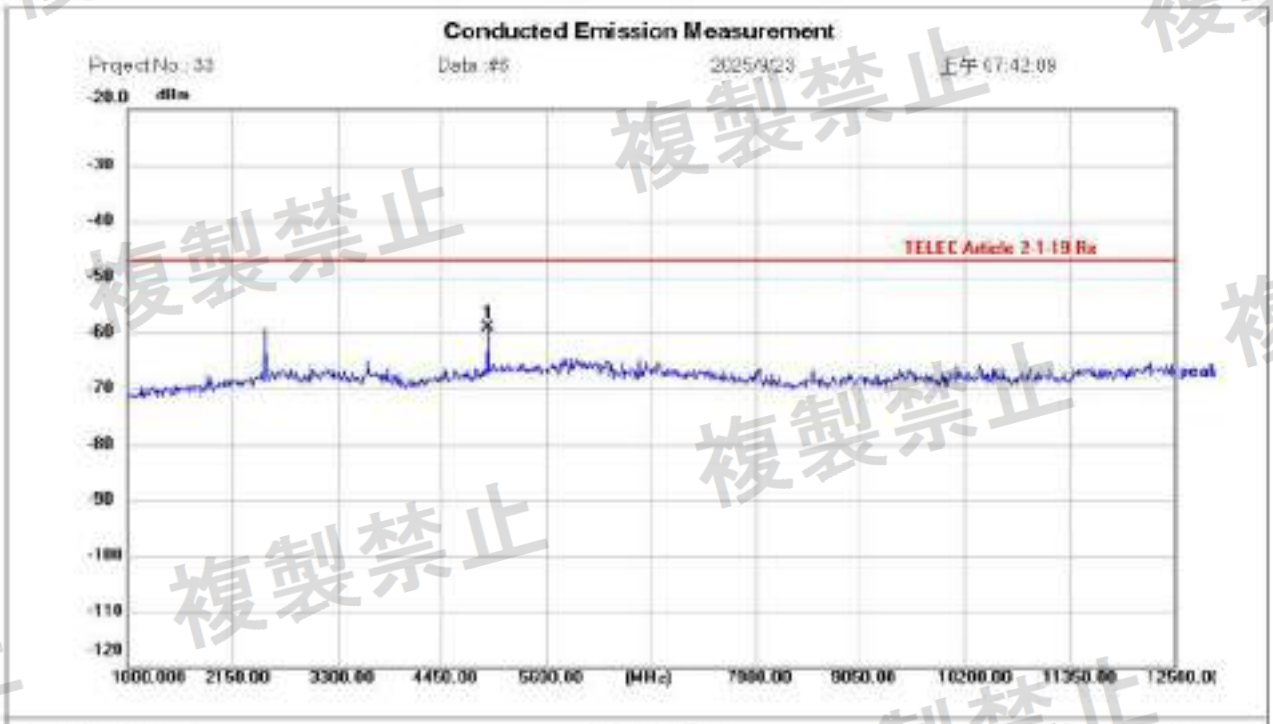


Site: Chamber 04
Limit: TELEC Artide 2-1-19 Rx
EUT: W6M22508-24659
M/N:
Mode: Rx BLE 1M CH39
Note:

Polarization:
Power: 3.3 Vdc
Distance:

Temperature: 23.8 (°C)
Humidity: 50 %RH

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	4956.000	-69.85	10.61	-59.24	-47.00	-12.24	peak			P	

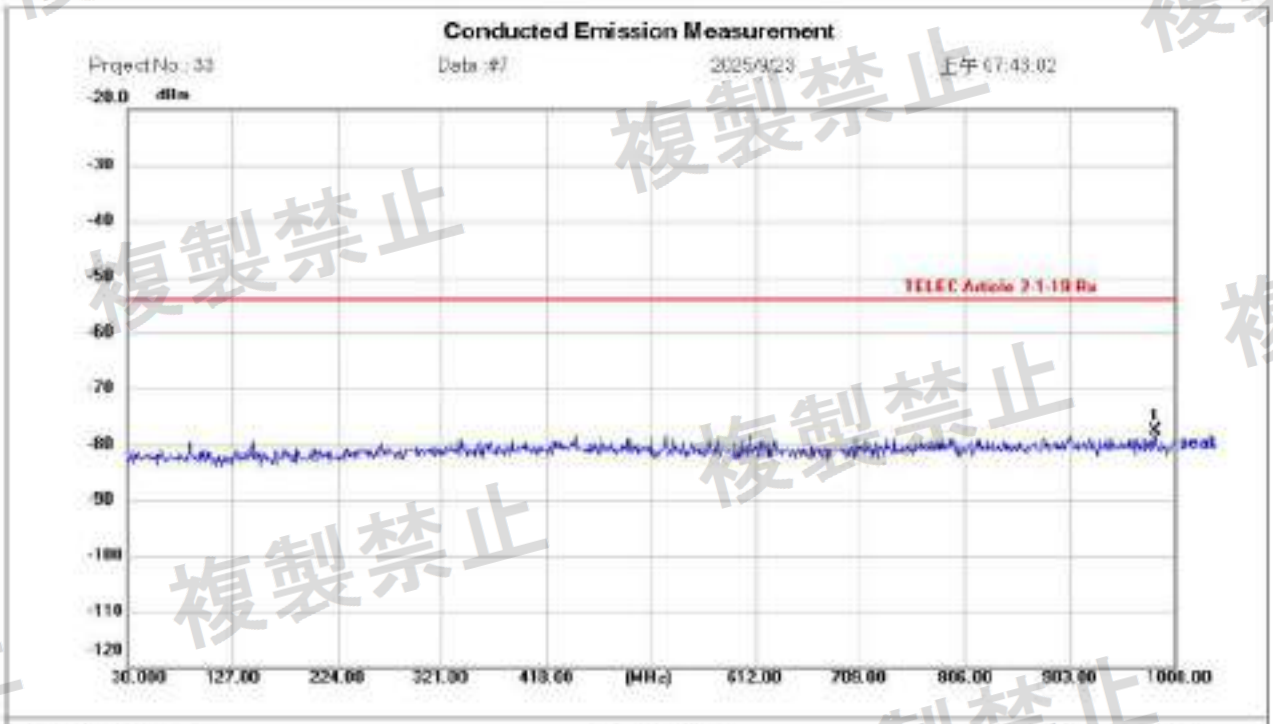


Site: Chamber 04
Limit: TELEC Artide 2-1-19 Rx
EUT: W6M22508-24659
M/N:
Mode: Rx BLE 2M CH00
Note:

Polarization:
Power: 3.3 Vdc
Distance:

Temperature: 23.8 (°C)
Humidity: 50 %RH

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	982.5400	-87.74	10.15	-77.59	-54.00	-23.59	peak			P	

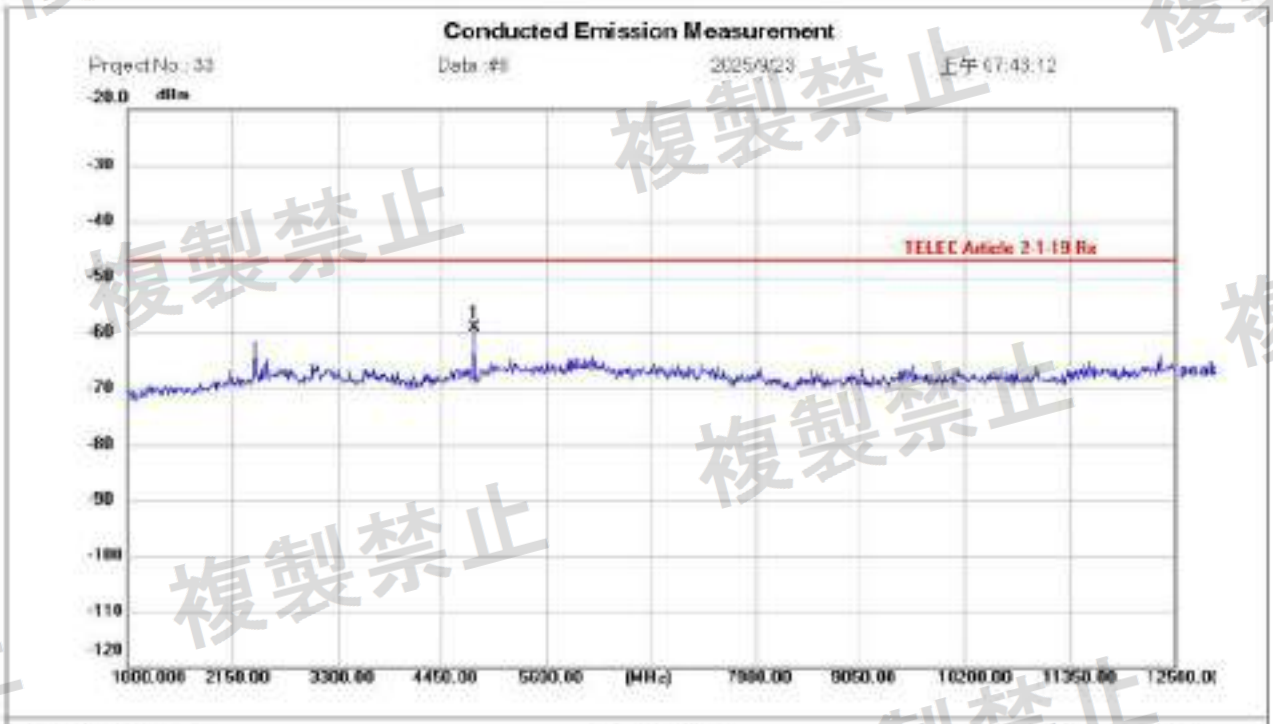


Site: Chamber 04
Limit: TELEC Artide 2-1-19 Rx
EUT: W6M22508-24659
M/N:
Mode: Rx BLE 2M CH00
Note:

Polarization:
Power: 3.3 Vdc
Distance:

Temperature: 23.8 (°C)
Humidity: 59 %RH

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	4806.500	-69.80	10.60	-59.20	-47.00	-12.20	peak			P	

Conducted Emission Measurement

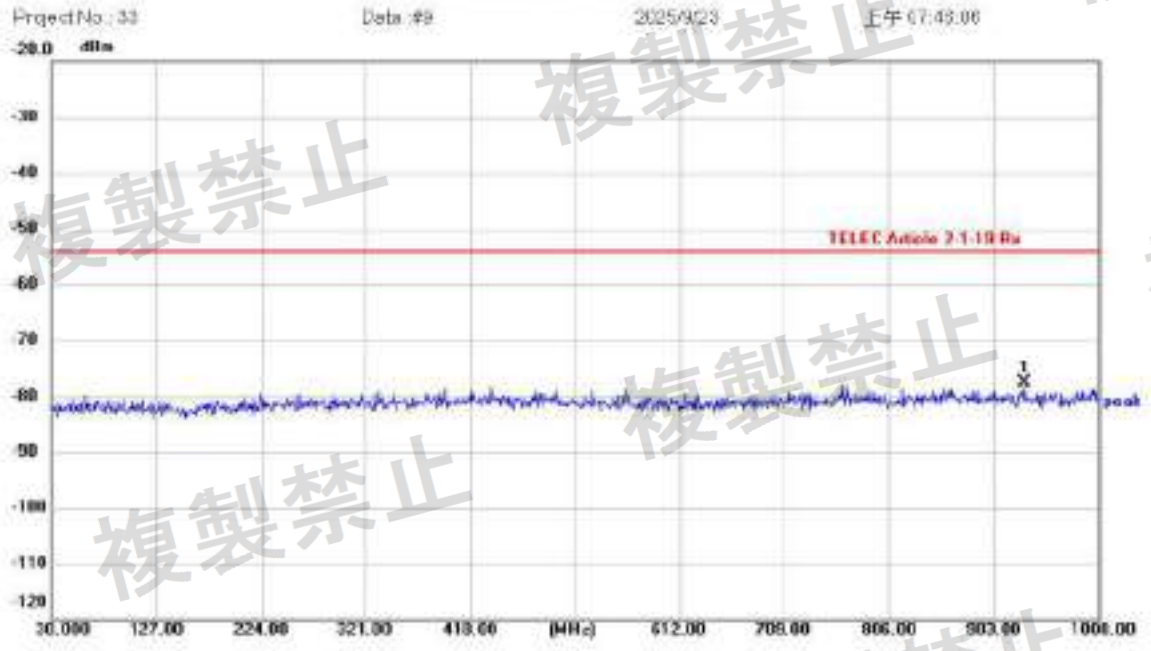


Site: Chamber 04
Limit: TELEC Artide 2-1-19 Rx
EUT: W6M22508-24659
M/N:
Mode: Rx BLE 2M CH19
Note:

Polarization:
Power: 3.3 Vdc
Distance:

Temperature: 23.8 (°C)
Humidity: 50 %RH

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	932.1000	-87.83	10.15	-77.68	-54.00	-23.68	peak			P	

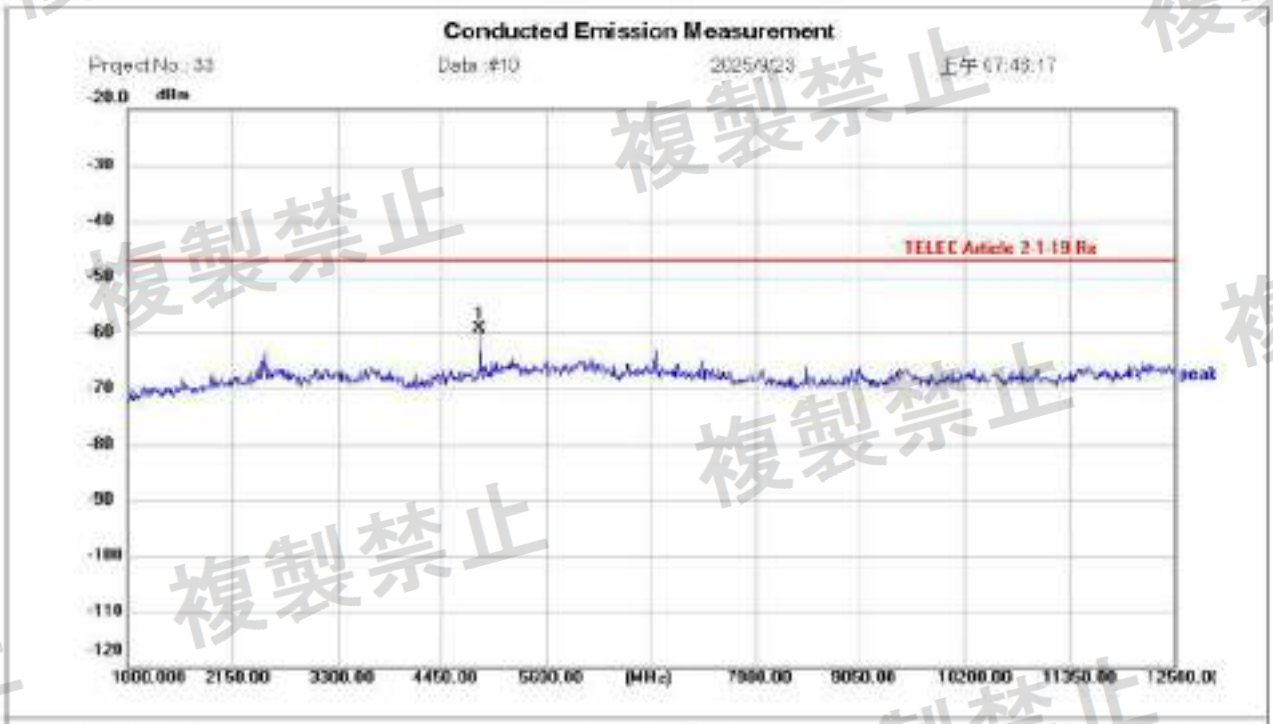


Site: Chamber 04
Limit: TELEC Artide 2-1-19 Rx
EUT: W6M22508-24659
M/N:
Mode: Rx BLE 2M CH19
Note:

Polarization:
Power: 3.3 Vdc
Distance:

Temperature: 23.8 (°C)
Humidity: 59 %RH

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	4875.500	-70.03	10.57	-59.46	-47.00	-12.46	peak			P	

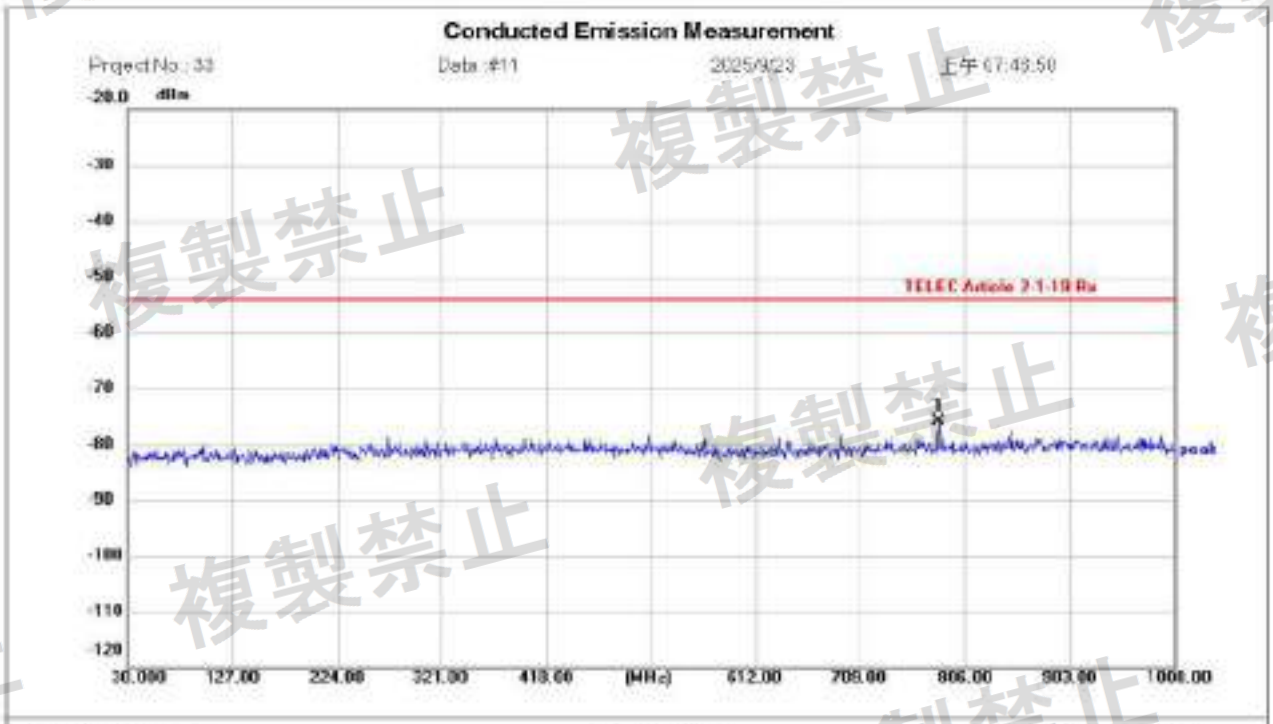


Site: Chamber 04
Limit: TELEC Artide 2-1-19 Rx
EUT: W6M22508-24659
M/N:
Mode: Rx BLE 2M CH39
Note:

Polarization:
Power: 3.3 Vdc
Distance:

Temperature: 23.8 (°C)
Humidity: 50 %RH

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	781.7500	-85.97	10.11	-75.86	-54.00	-21.86	peak			P	

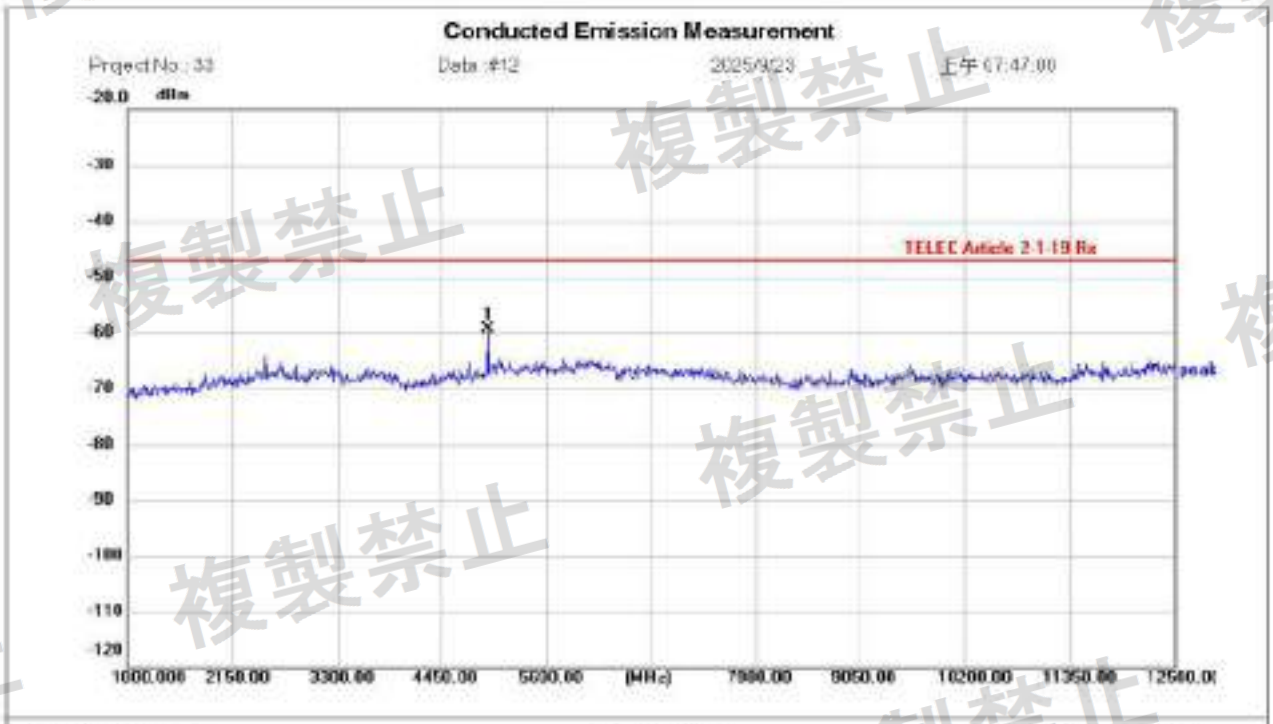


Site: Chamber 04
Limit: TELEC Artide 2-1-19 Rx
EUT: W6M22508-24659
M/N:
Mode: Rx BLE 2M CH39
Note:

Polarization:
Power: 3.3 Vdc
Distance:

Temperature: 23.8 (°C)
Humidity: 50 %RH

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	4956.000	-69.92	10.61	-59.31	-47.00	-12.31	peak			P	

Inverted F Antenna

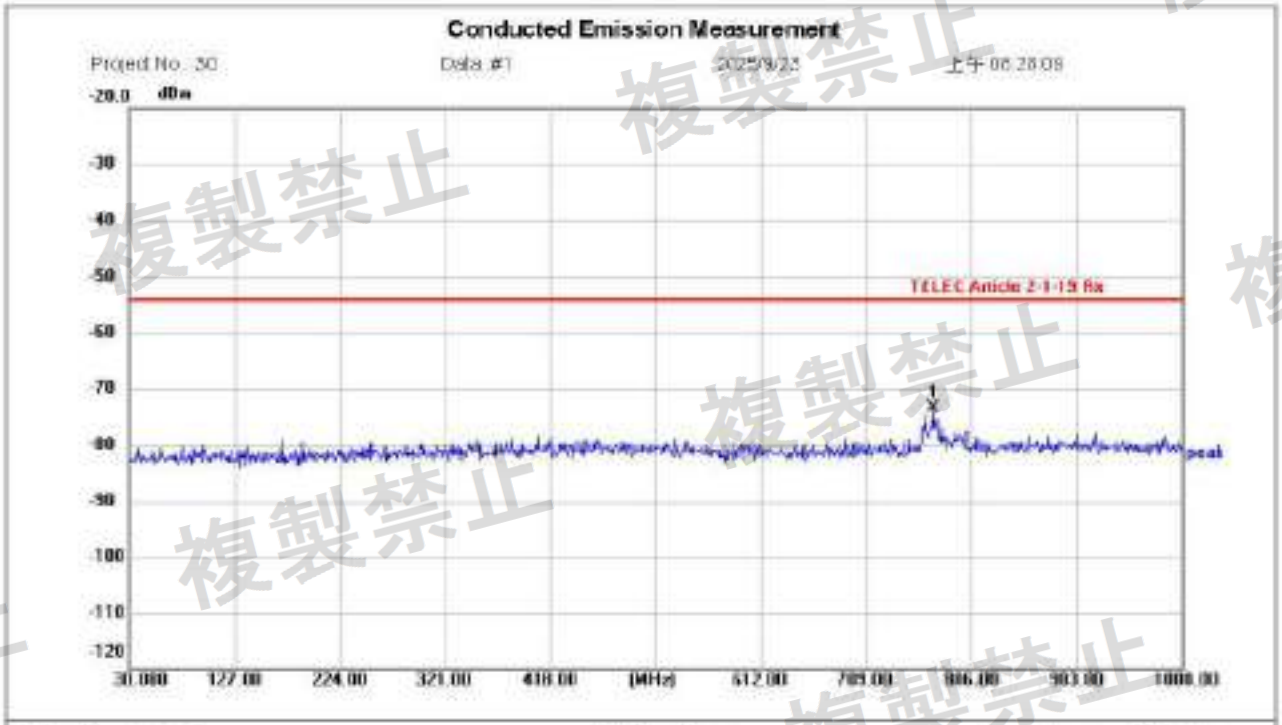


Site: Chamber 04
Limit: TELEC Article 2-1-19 Rx
EUT: W6M22508-24659
M/N:
Mode: Rx BLE 1M CH00
Note:

Polarization:
Power: 3 Vd.c.
Distance:

Temperature: 23.8 (C)
Humidity: 56 %RH

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1 *	771.0800	-83.38	10.12	-73.26	-54.00	-19.26	peak			P	

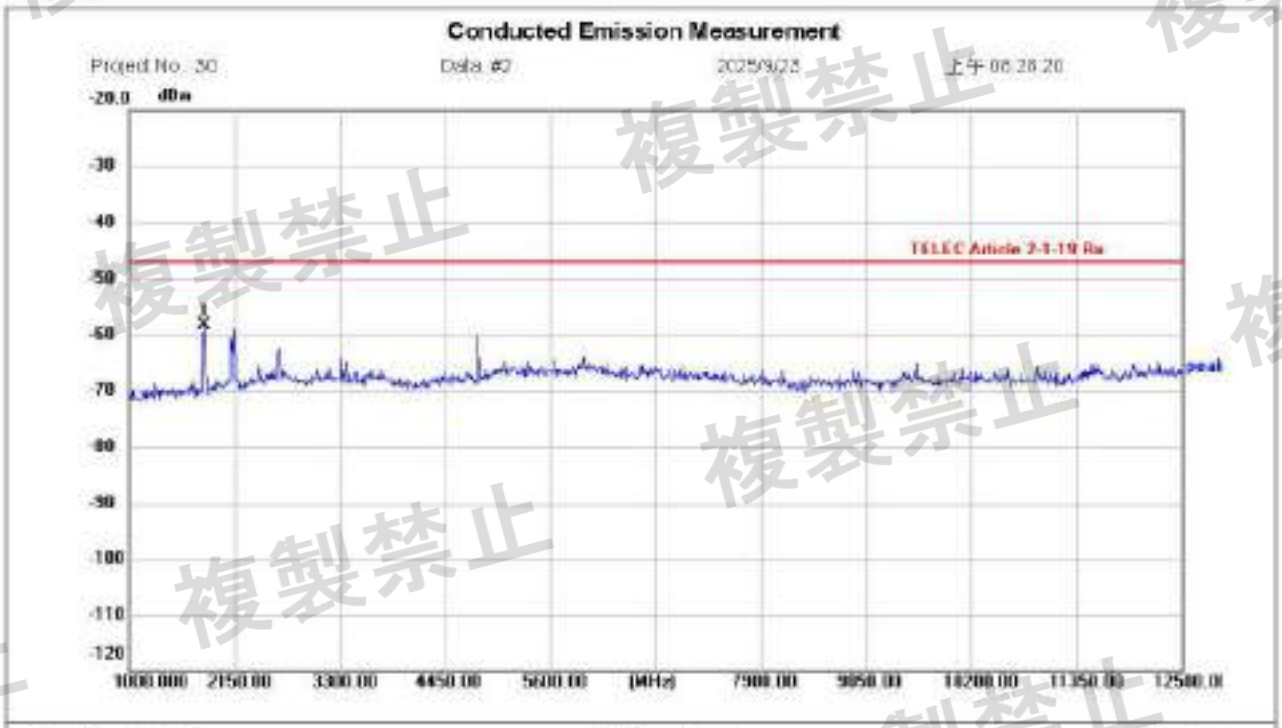


Site: Chamber 04
Limit: TELEC Article 2-1-19 Rx
EUT: W6M22508-24659
M/N:
Mode: Rx BLE 1M CH00
Note:

Polarization:
Power: 3 Vd.c.
Distance:

Temperature: 23.8 (°C)
Humidity: 56 %RH

No	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	1816.500	-68.62	10.28	-58.34	-47.00	-11.34	peak			P	

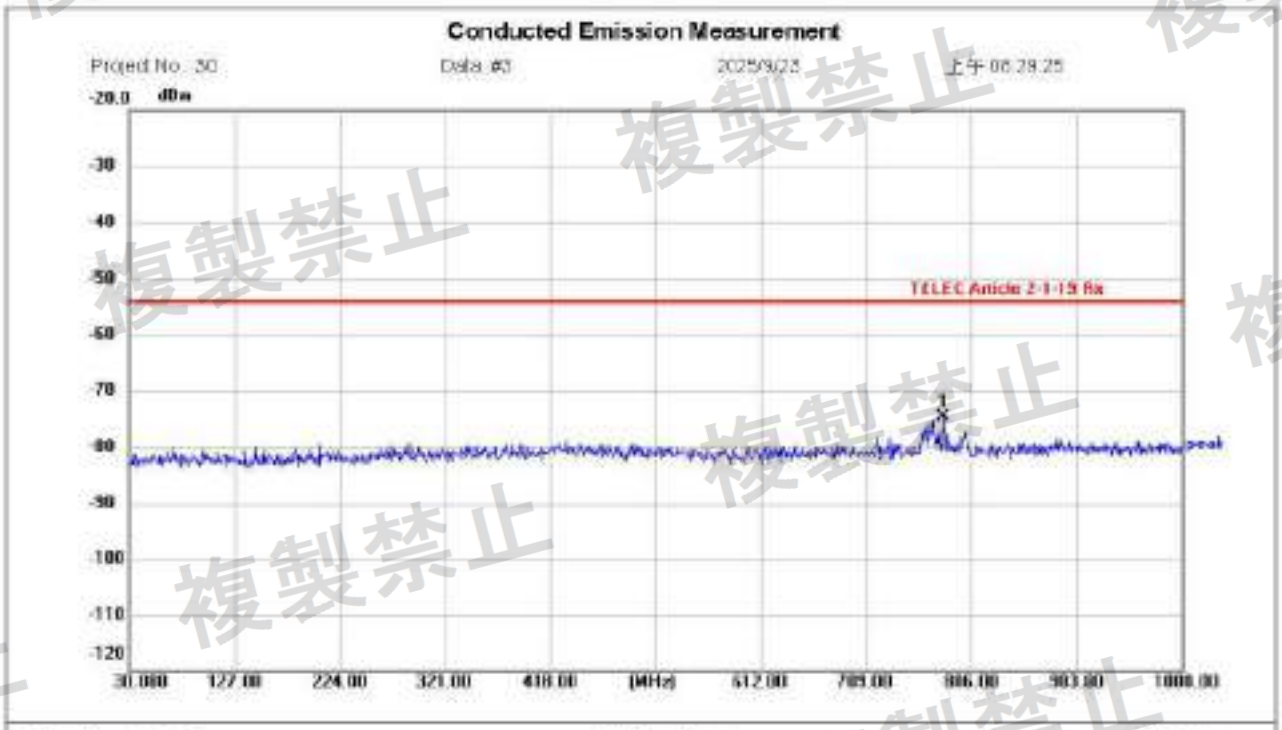


Site: Chamber 04
Limit: TELEC Article 2-1-19 Rx
EUT: W6M22508-24659
M/N:
Mode: Rx BLE 1M CH19
Note:

Polarization:
Power: 3 Vd.c.
Distance:

Temperature: 23.8 (°C)
Humidity: 56 %RH

No	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	780.7800	-84.61	10.11	-74.50	-54.00	-20.50	peak			P	

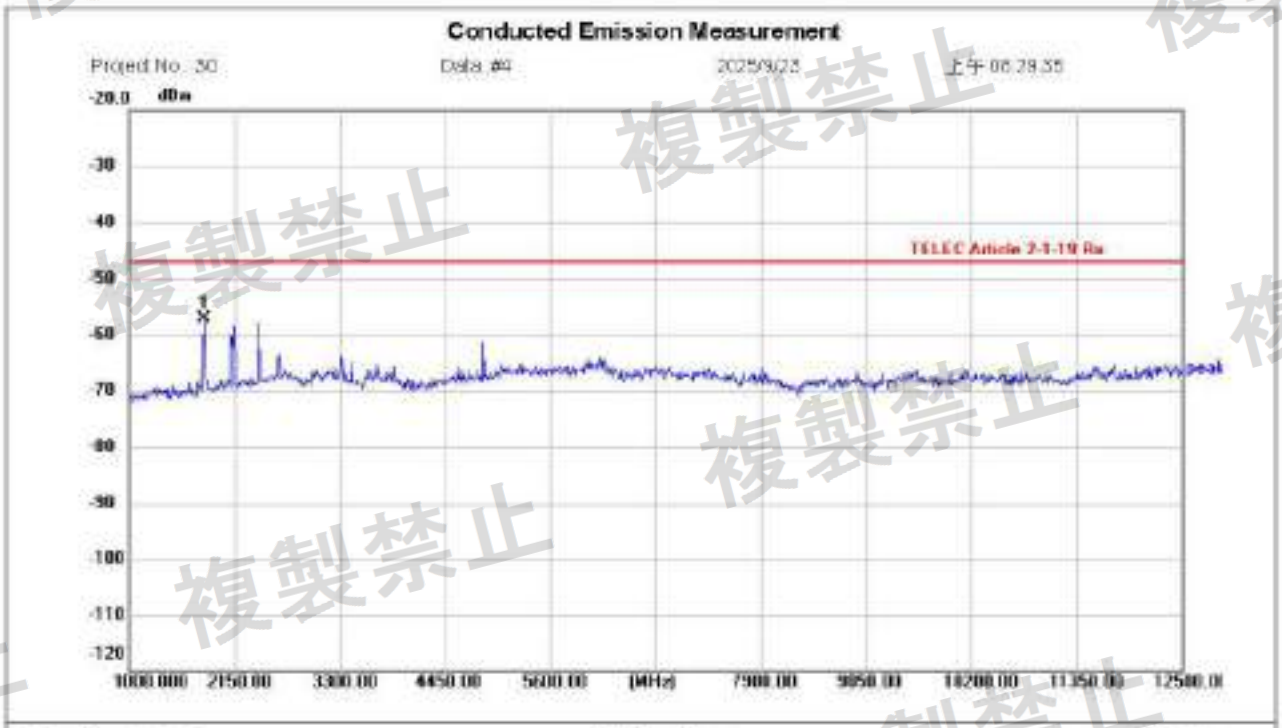


Site: Chamber 04
Limit: TELEC Article 2-1-19 Rx
EUT: W6M22508-24659
M/N:
Mode: Rx BLE 1M CH19
Note:

Polarization:
Power: 3 Vd.c.
Distance:

Temperature: 23.8 (°C)
Humidity: 56 %RH

No	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	1816.500	-67.41	10.28	-57.13	-47.00	-10.13	peak			P	

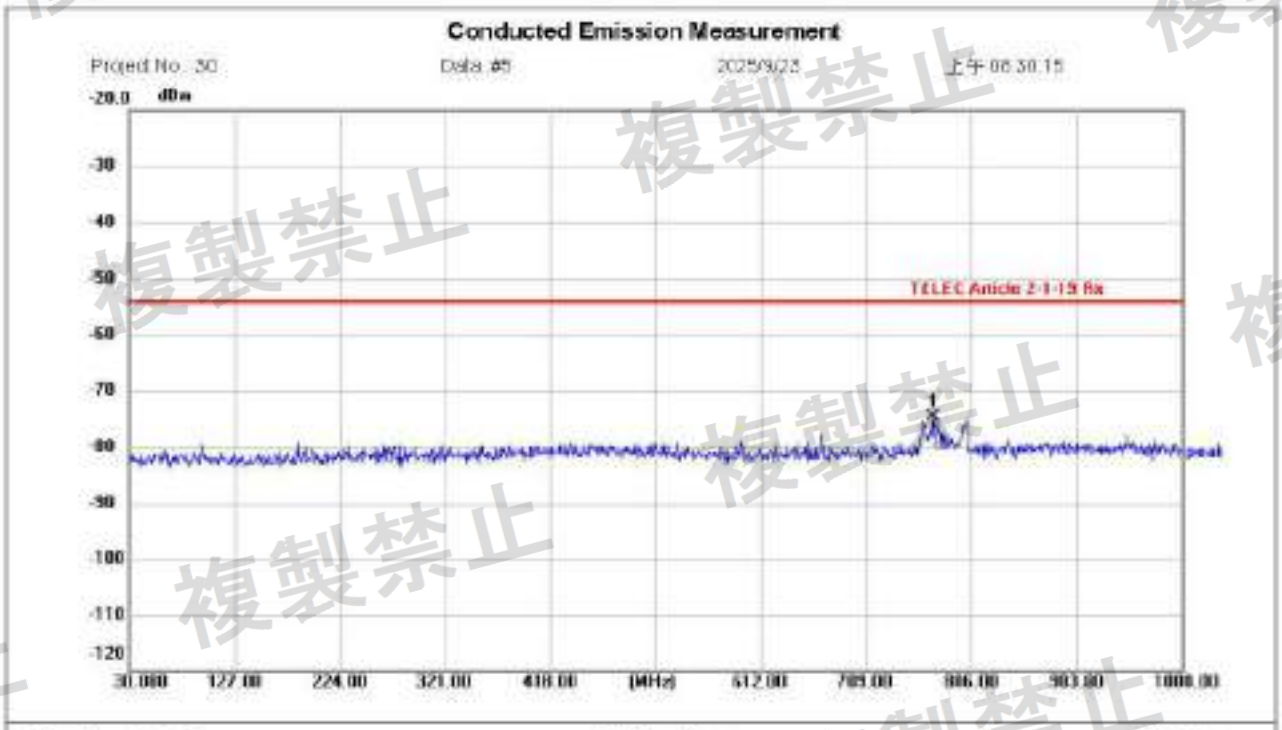


Site: Chamber 04
Limit: TELEC Article 2-1-19 Rx
EUT: W6M22508-24659
M/N:
Mode: Rx BLE 1M CH39
Note:

Polarization:
Power: 3 Vd.c.
Distance:

Temperature: 23.8 (C)
Humidity: 56 %RH

No	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	771.0800	-84.83	10.12	-74.71	-54.00	-20.71	peak			P	

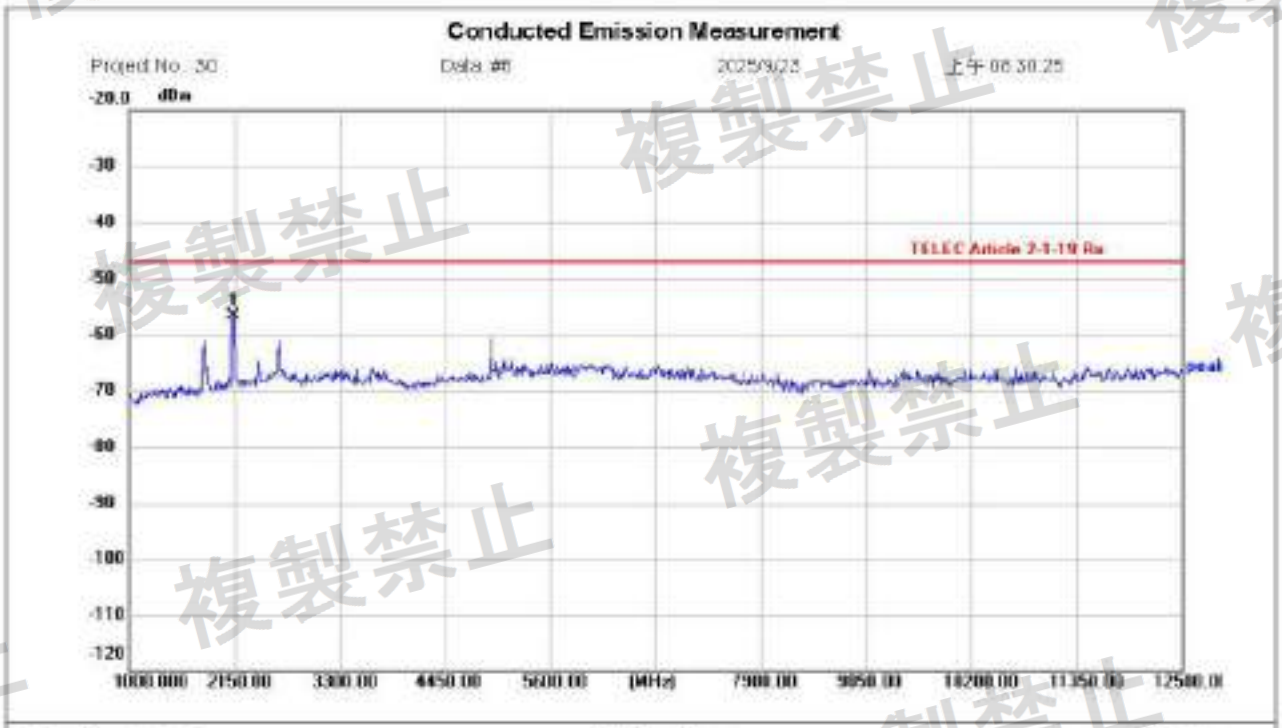


Site: Chamber 04
Limit: TELEC Article 2-1-19 Rx
EUT: W6M22508-24659
M/N:
Mode: Rx BLE 1M CH39
Note:

Polarization:
Power: 3 Vd.c.
Distance:

Temperature: 23.8 (°C)
Humidity: 56 %RH

No	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	2138.500	-67.01	10.32	-56.69	-47.00	-9.69	peak			P	

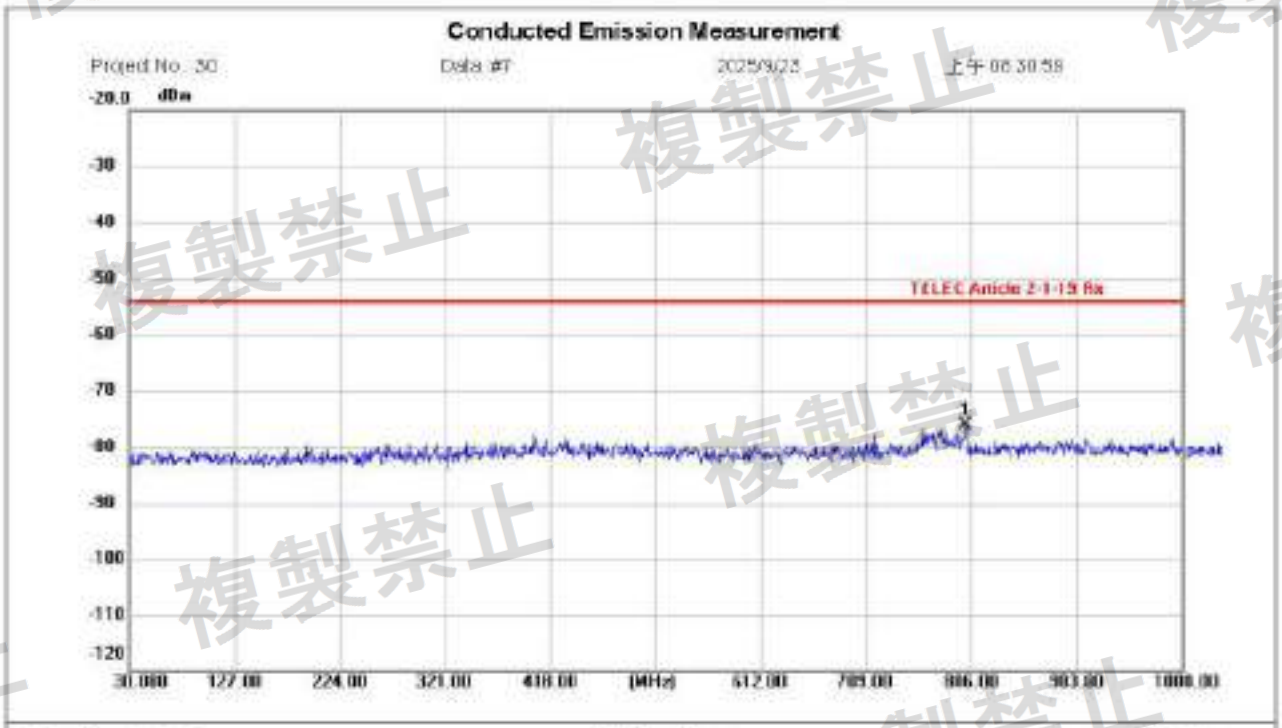


Site: Chamber 04
Limit: TELEC Article 2-1-19 Rx
EUT: W6M22508-24659
M/N:
Mode: Rx BLE 2M CH00
Note:

Polarization:
Power: 3 Vd.c.
Distance:

Temperature: 23.8 (°C)
Humidity: 56 %RH

No	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	801.1500	-86.30	10.10	-76.20	-54.00	-22.20	peak			P	

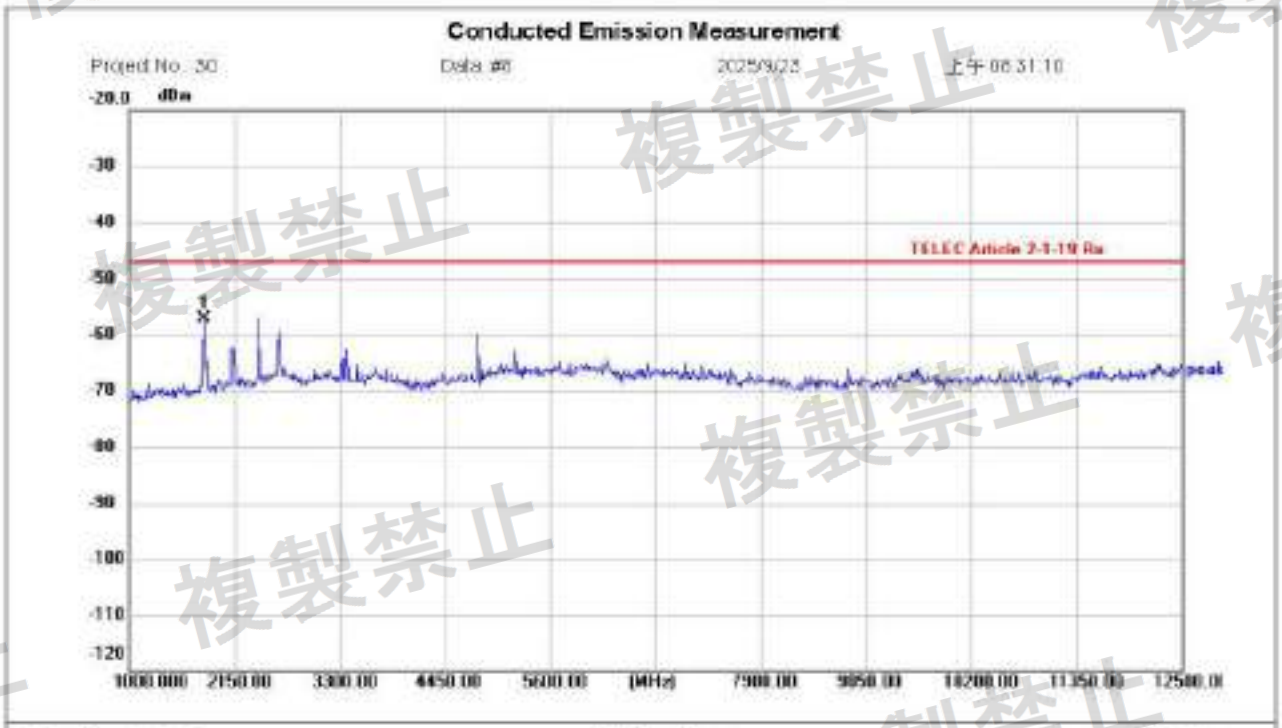


Site: Chamber 04
Limit: TELEC Article 2-1-19 Rx
EUT: W6M22508-24659
M/N:
Mode: Rx BLE 2M CH00
Note:

Polarization:
Power: 3 Vd.c.
Distance:

Temperature: 23.8 (°C)
Humidity: 56 %RH

No	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	1816.500	-67.28	10.28	-57.00	-47.00	-10.00	peak			P	

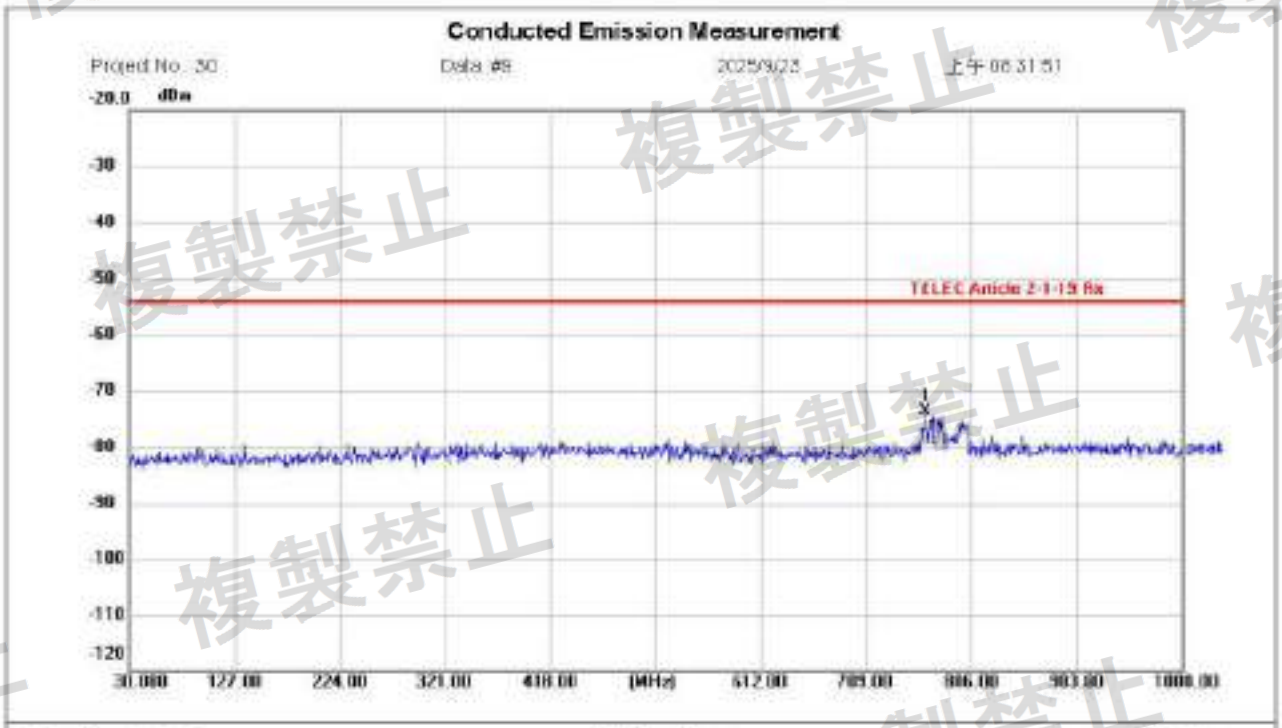


Site: Chamber 04
Limit: TELEC Article 2-1-19 Rx
EUT: W6M22508-24659
M/N:
Mode: Rx BLE 2M CH19
Note:

Polarization:
Power: 3 Vd.c.
Distance:

Temperature: 23.8 (C)
Humidity: 56 %RH

No	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	764.2900	-83.80	10.12	-73.68	-54.00	-19.68	peak			P	

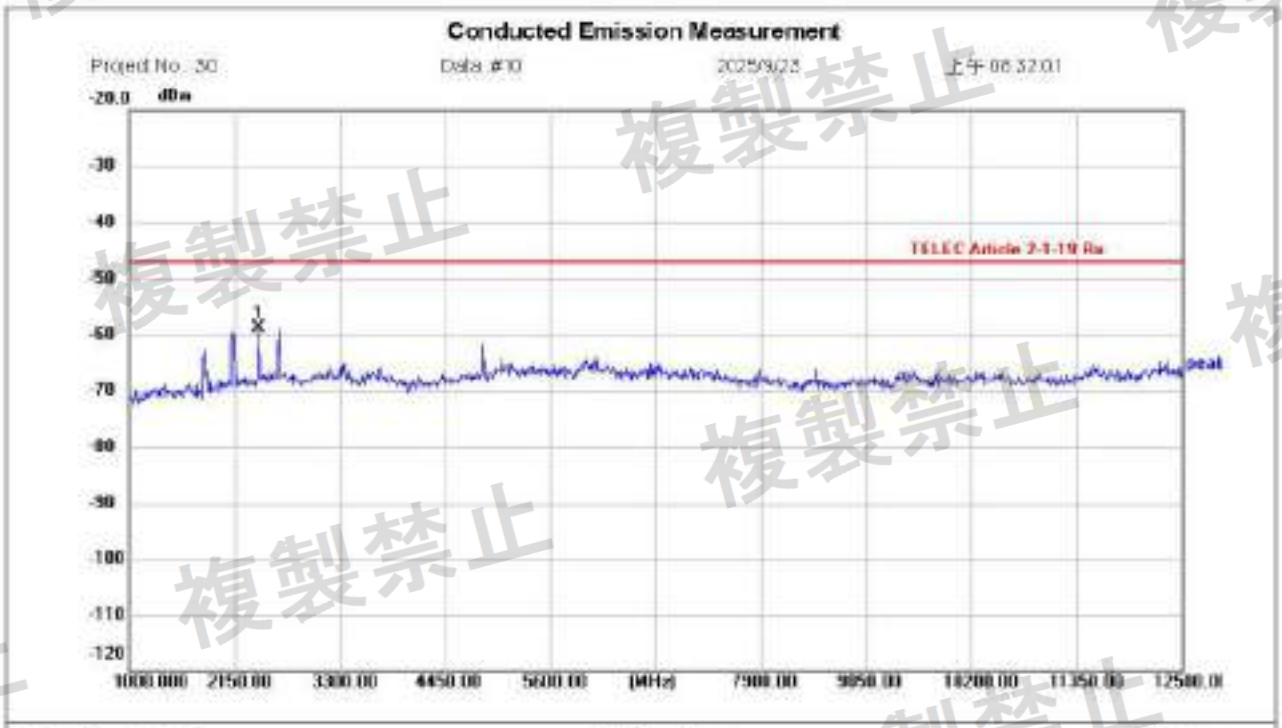


Site: Chamber 04
Limit: TELEC Article 2-1-19 Rx
EUT: W6M22508-24659
M/N:
Mode: Rx BLE 2M CH19
Note:

Polarization:
Power: 3 Vd.c.
Distance:

Temperature: 23.8 (°C)
Humidity: 56 %RH

No	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	2414.500	-69.27	10.36	-58.91	-47.00	-11.91	peak			P	

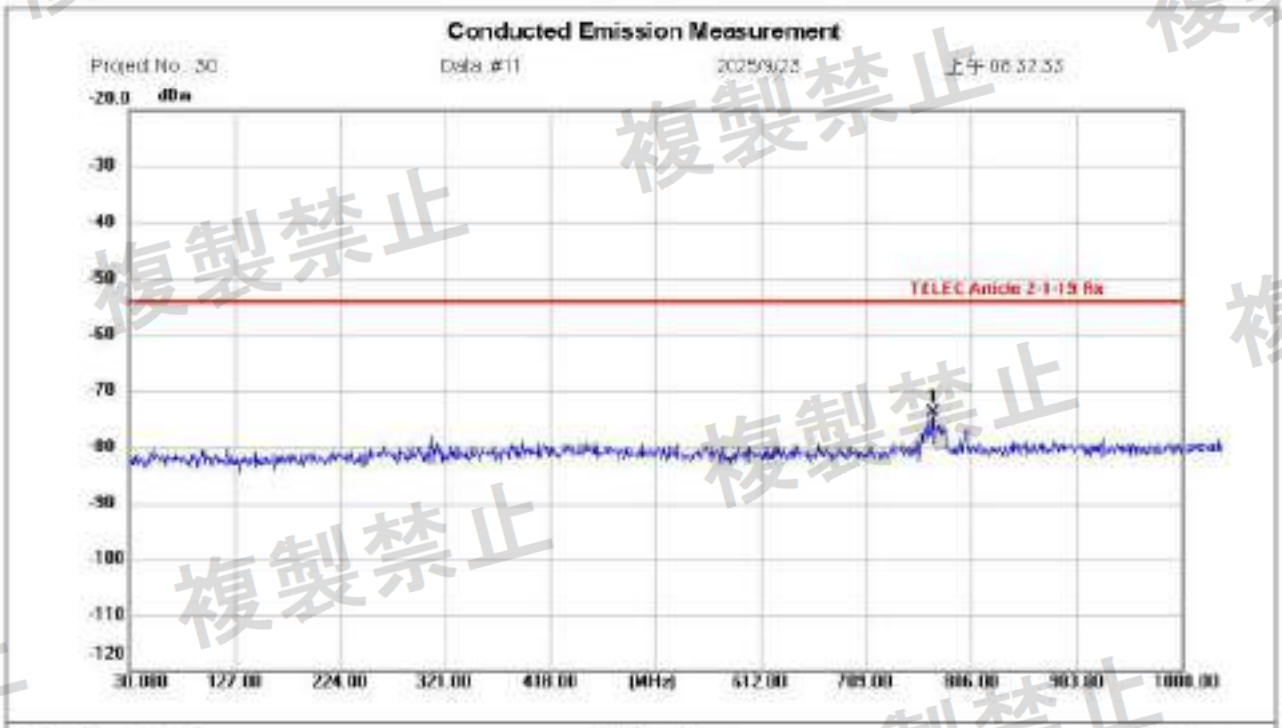


Site: Chamber 04
Limit: TELEC Article 2-1-19 Rx
EUT: W6M22508-24659
M/N:
Mode: Rx BLE 2M CH39
Note:

Polarization:
Power: 3 Vd.c.
Distance:

Temperature: 23.8 (°C)
Humidity: 56 %RH

No	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	771.0800	-84.09	10.12	-73.97	-54.00	-19.97	peak			P	

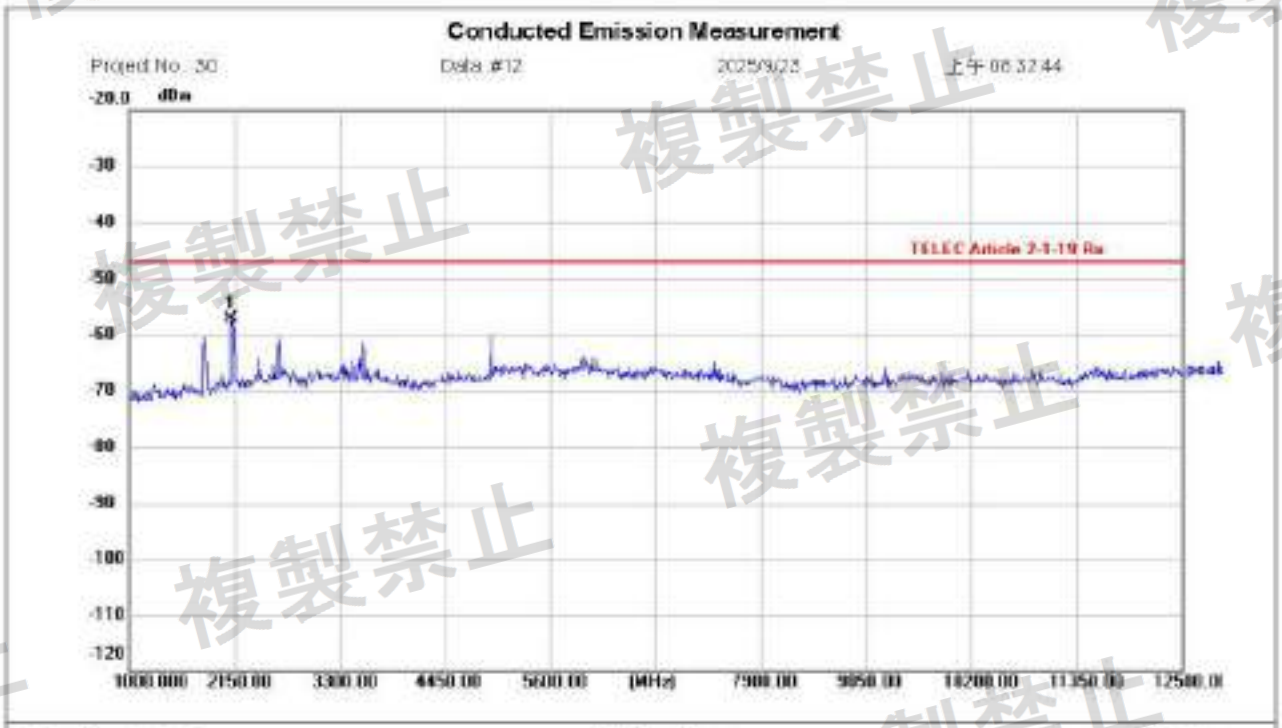


Site: Chamber 04
Limit: TELEC Article 2-1-19 Rx
EUT: W6M22508-24659
M/N:
Mode: Rx BLE 2M CH39
Note:

Polarization:
Power: 3 Vd.c.
Distance:

Temperature: 23.8 (°C)
Humidity: 56 %RH

No	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	2115.500	-67.33	10.32	-57.01	-47.00	-10.01	peak			P	

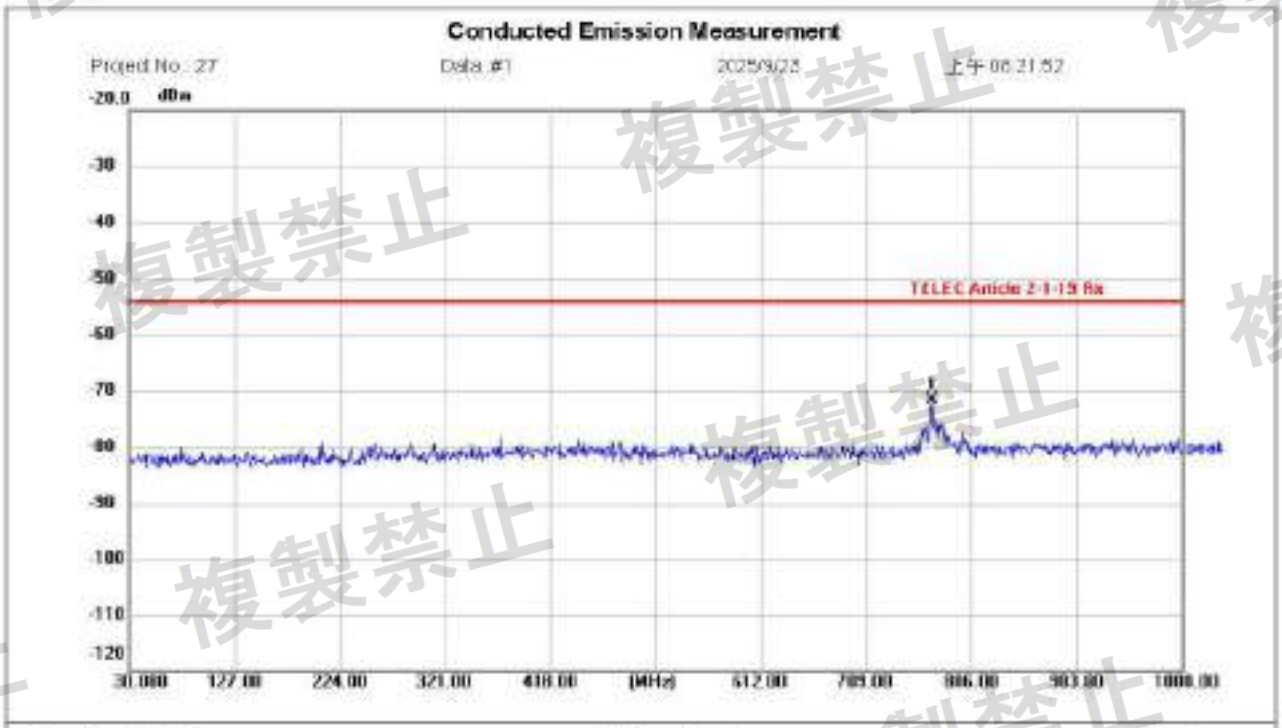


Site: Chamber 04
Limit: TELEC Article 2-1-19 Rx
EUT: W6M22508-24659
M/N:
Mode: Rx BLE 1M CH00
Note:

Polarization:
Power: 2.7 Vdc
Distance:

Temperature: 23.8 (C)
Humidity: 56 %RH

No	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	770.1100	-81.74	10.12	-71.62	-54.00	-17.62	peak			P	

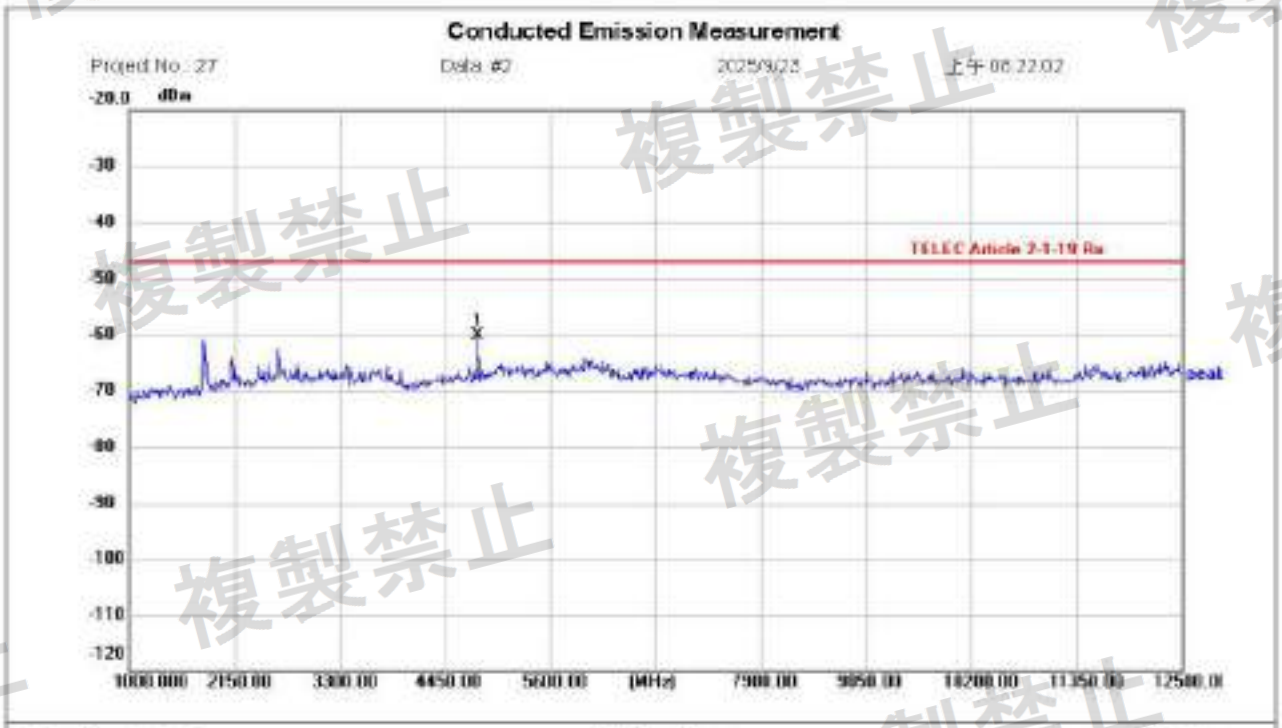


Site: Chamber 04
Limit: TELEC Article 2-1-19 Rx
EUT: W6M22508-24659
M/N:
Mode: Rx BLE 1M CH00
Note:

Polarization:
Power: 2.7 Vdc
Distance:

Temperature: 23.8 (°C)
Humidity: 56 %RH

No	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	4806.500	-70.78	10.60	-60.18	-47.00	-13.18	peak			P	

Conducted Emission Measurement

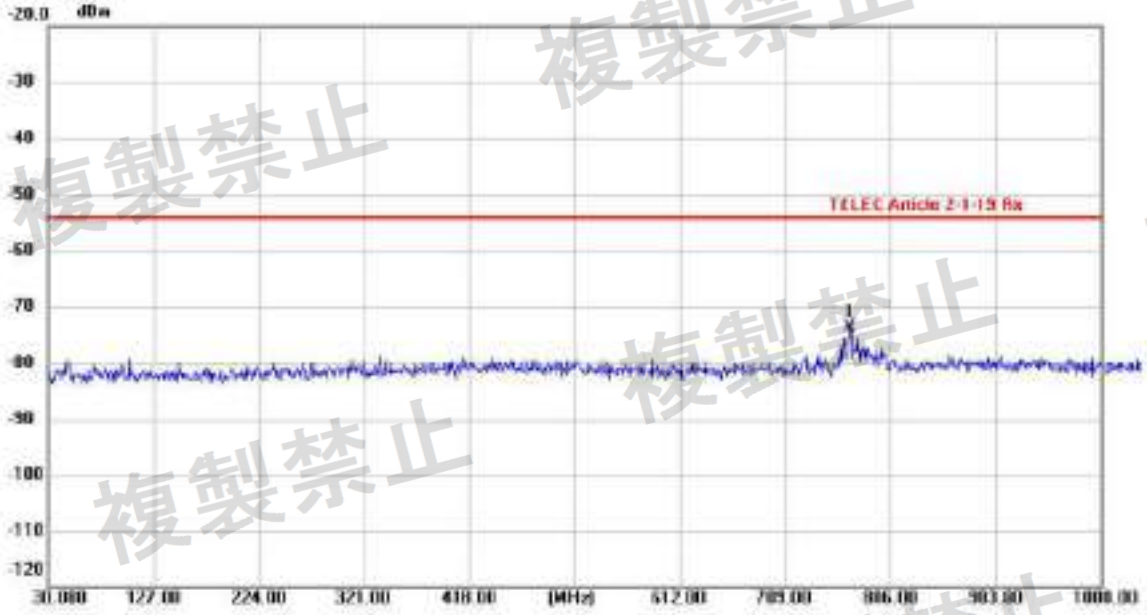


Site: Chamber 04
Limit: TELEC Article 2-1-19 Rx
EUT: W6M22508-24659
M/N:
Mode: Rx BLE 1M CH19
Note:

Polarization:
Power: 2.7 Vdc
Distance:

Temperature: 23.8 (C)
Humidity: 56 %RH

No	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	769.1400	-83.69	10.12	-73.57	-54.00	-19.57	peak			P	

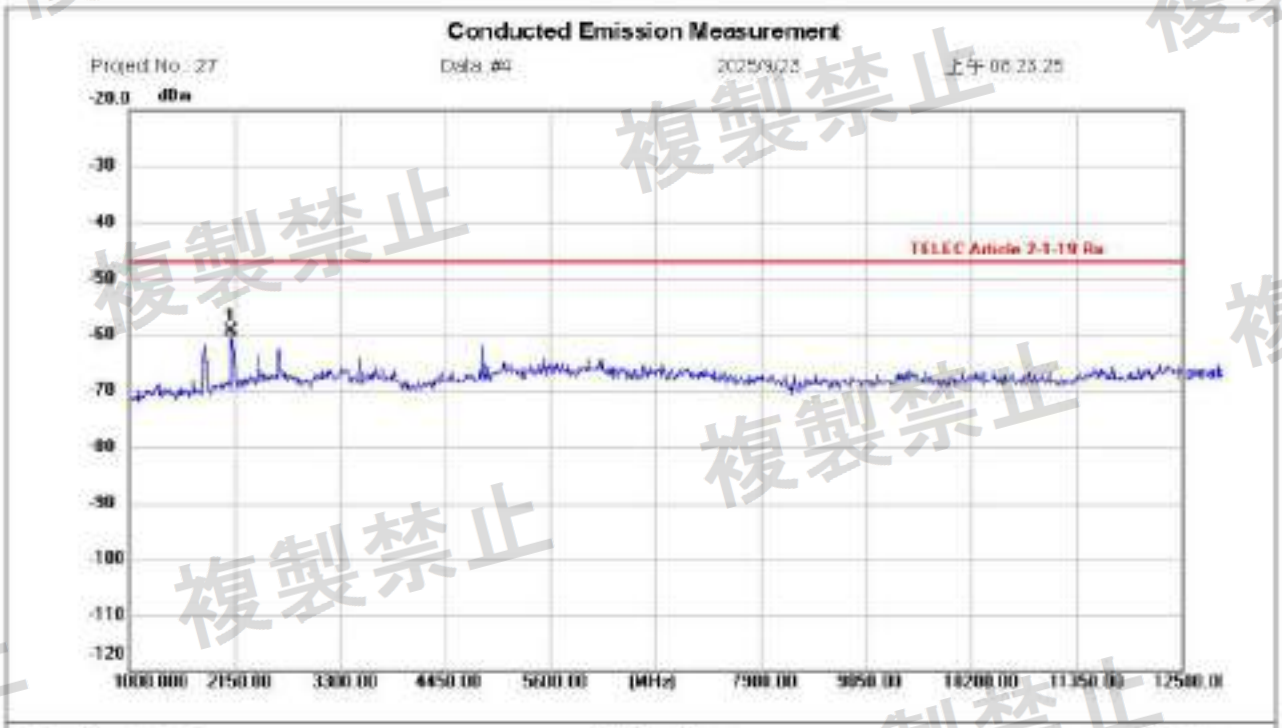


Site: Chamber 04
Limit: TELEC Article 2-1-19 Rx
EUT: W6M22508-24659
M/N:
Mode: Rx BLE 1M CH19
Note:

Polarization:
Power: 2.7 Vdc
Distance:

Temperature: 23.8 (C)
Humidity: 56 %RH

No	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	2115.500	-69.67	10.32	-59.35	-47.00	-12.35	peak			P	

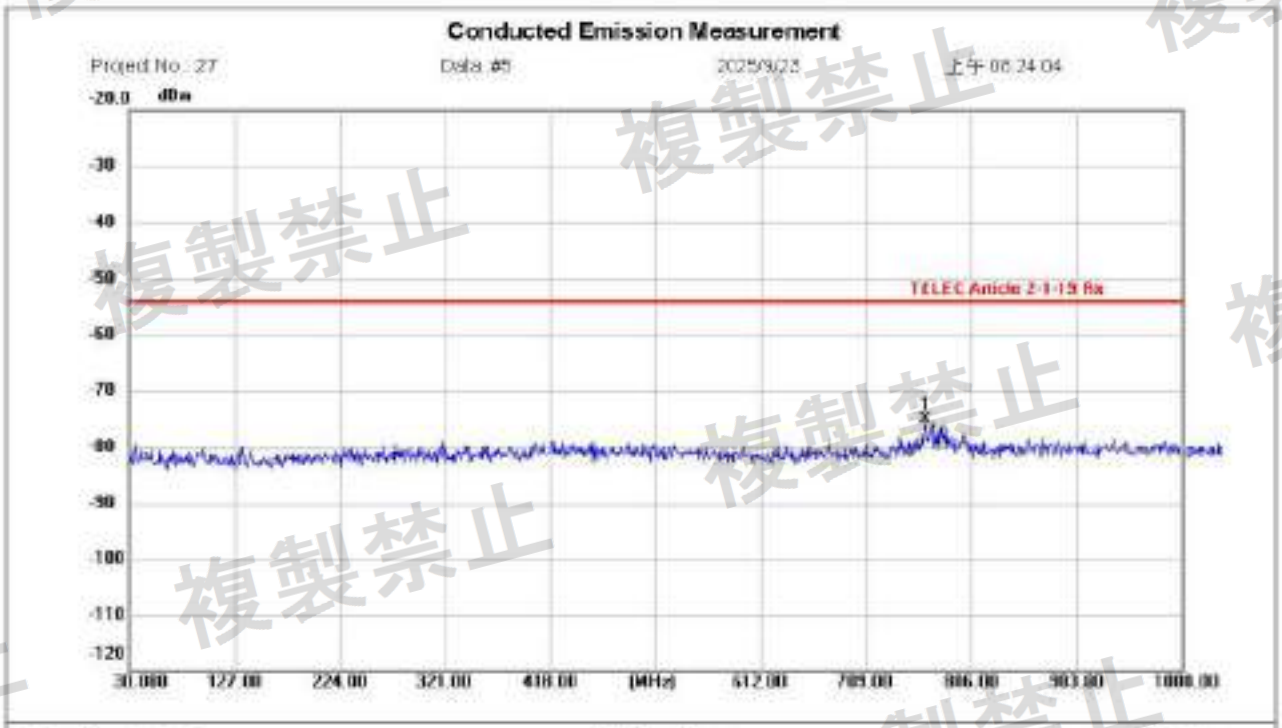


Site: Chamber 04
Limit: TELEC Article 2-1-19 Rx
EUT: W6M22508-24659
M/N:
Mode: Rx BLE 1M CH39
Note:

Polarization:
Power: 2.7 Vdc
Distance:

Temperature: 23.8 (C)
Humidity: 56 %RH

No	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	764.2900	-85.29	10.12	-75.17	-54.00	-21.17	peak			P	

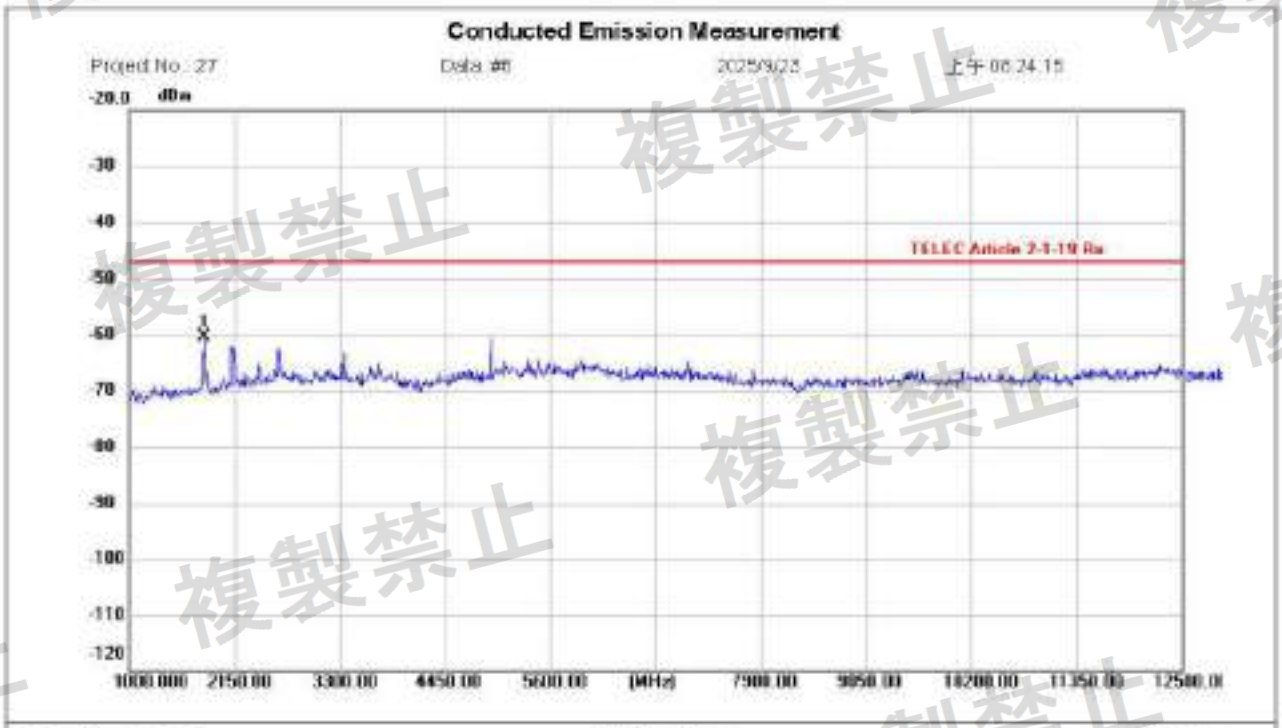


Site: Chamber 04
Limit: TELEC Article 2-1-19 Rx
EUT: W6M22508-24659
M/N:
Mode: Rx BLE 1M CH39
Note:

Polarization:
Power: 2.7 Vdc
Distance:

Temperature: 23.8 (°C)
Humidity: 56 %RH

No	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	1816.500	-70.57	10.28	-60.29	-47.00	-13.29	peak			P	

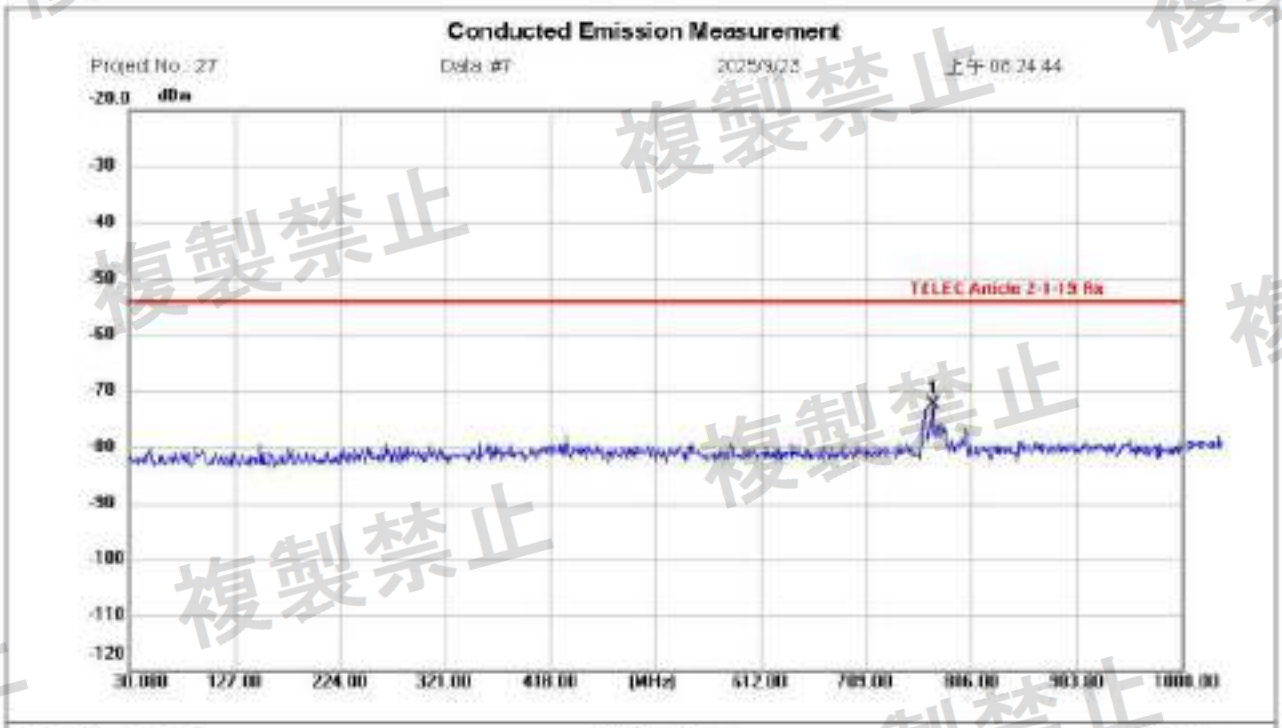


Site: Chamber 04
Limit: TELEC Article 2-1-19 Rx
EUT: W6M22508-24659
M/N:
Mode: Rx BLE 2M CH00
Note:

Polarization:
Power: 2.7 Vdc
Distance:

Temperature: 23.8 (C)
Humidity: 56 %RH

No	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	771.0800	-82.40	10.12	-72.28	-54.00	-18.28	peak			P	

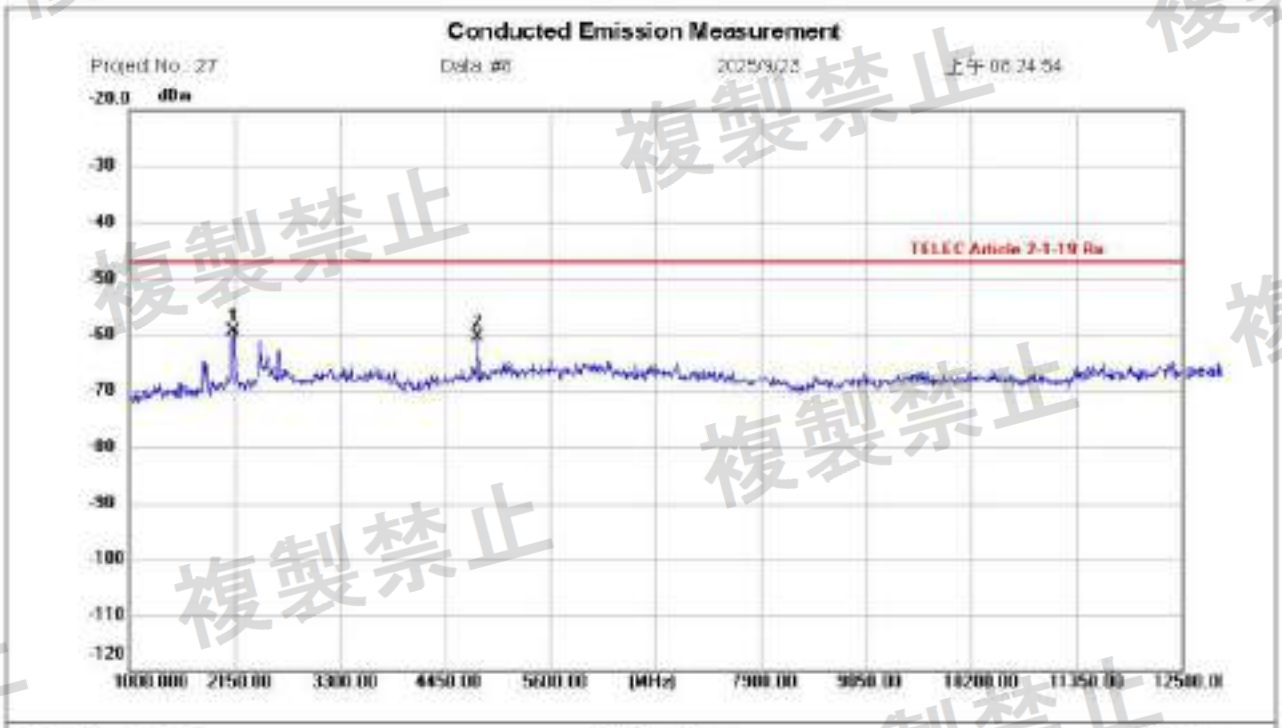


Site: Chamber 04
Limit: TELEC Article 2-1-19 Rx
EUT: W6M22508-24659
M/N:
Mode: Rx BLE 2M CH00
Note:

Polarization:
Power: 2.7 Vdc
Distance:

Temperature: 23.8 (°C)
Humidity: 56 %RH

No	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	2138.500	-69.68	10.32	-59.36	-47.00	-12.36	peak			P	
2	4806.500	-71.07	10.60	-60.47	-47.00	-13.47	peak			P	

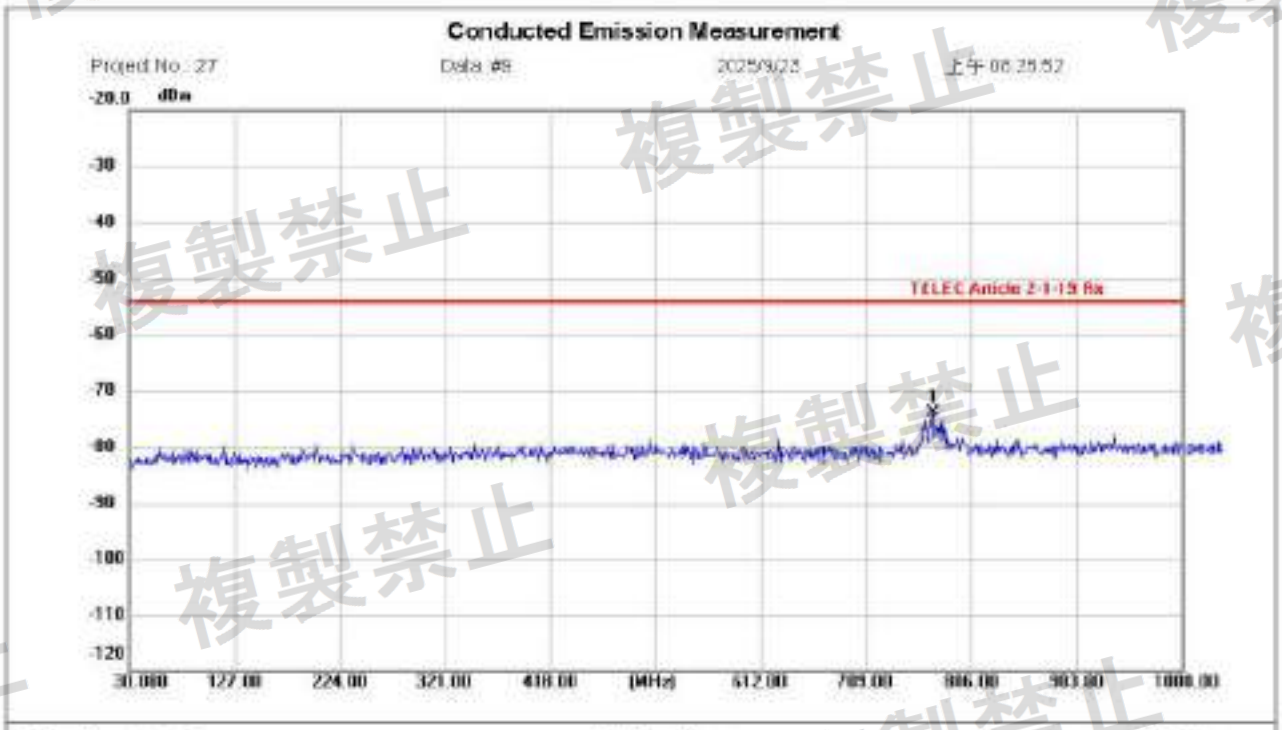


Site: Chamber 04
Limit: TELEC Article 2-1-19 Rx
EUT: W6M22508-24659
M/N:
Mode: Rx BLE 2M CH19
Note:

Polarization:
Power: 2.7 Vdc
Distance:

Temperature: 23.8 (C)
Humidity: 56 %RH

No	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	771.0800	-83.96	10.12	-73.84	-54.00	-19.84	peak			P	

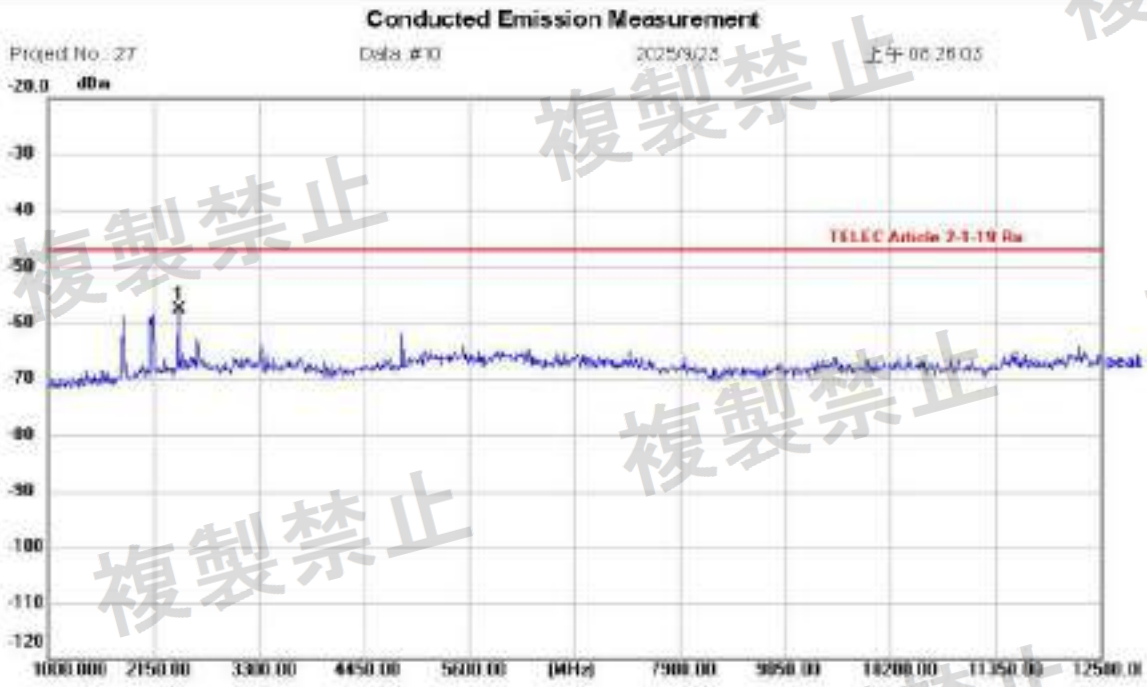


Site: Chamber 04
Limit: TELEC Article 2-1-19 Rx
EUT: W6M22508-24659
M/N:
Mode: Rx BLE 2M CH19
Note:

Polarization:
Power: 2.7 Vdc
Distance:

Temperature: 23.8 (°C)
Humidity: 56 %RH

No	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	2426.000	-67.88	10.36	-57.52	-47.00	-10.52	peak			P	

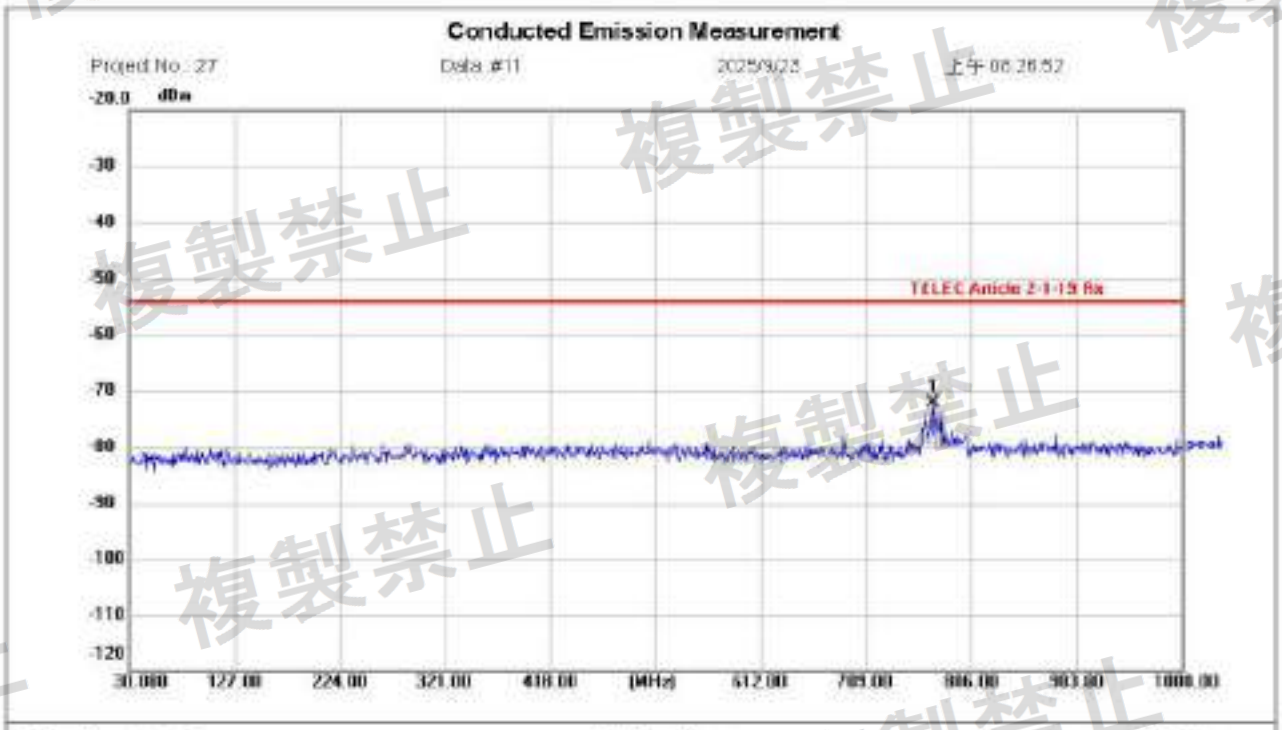


Site: Chamber 04
Limit: TELEC Article 2-1-19 Rx
EUT: W6M22508-24659
M/N:
Mode: Rx BLE 2M CH39
Note:

Polarization:
Power: 2.7 Vdc
Distance:

Temperature: 23.8 (°C)
Humidity: 56 %RH

No	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	771.0800	-82.32	10.12	-72.20	-54.00	-18.20	peak			P	

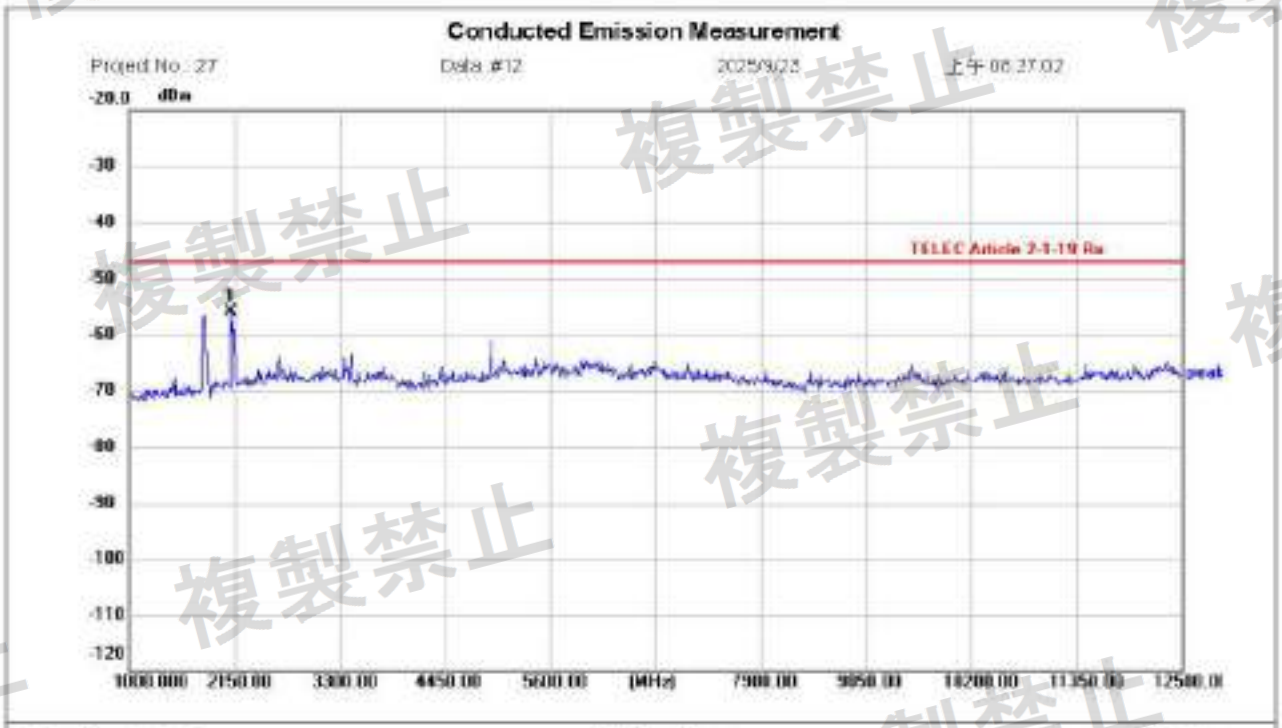


Site: Chamber 04
Limit: TELEC Article 2-1-19 Rx
EUT: W6M22508-24659
M/N:
Mode: Rx BLE 2M CH39
Note:

Polarization:
Power: 2.7 Vdc
Distance:

Temperature: 23.8 (°C)
Humidity: 56 %RH

No	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	2115.500	-66.14	10.32	-55.82	-47.00	-8.82	peak			P	

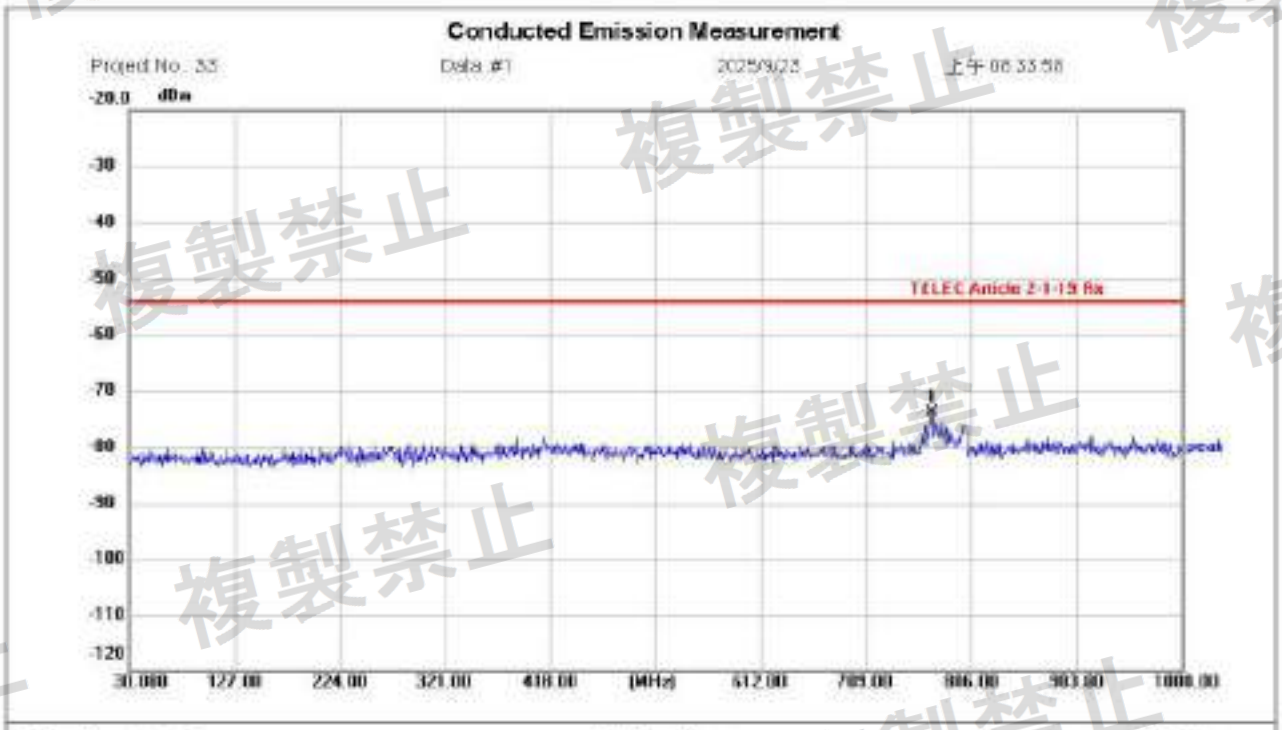


Site: Chamber 04
Limit: TELEC Article 2-1-19 Rx
EUT: W6M22508-24659
M/N:
Mode: Rx BLE 1M CH00
Note:

Polarization:
Power: 3.3 Vdc
Distance:

Temperature: 23.8 (C)
Humidity: 56 %RH

No	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	770.1100	-84.00	10.12	-73.88	-54.00	-19.88	peak			P	

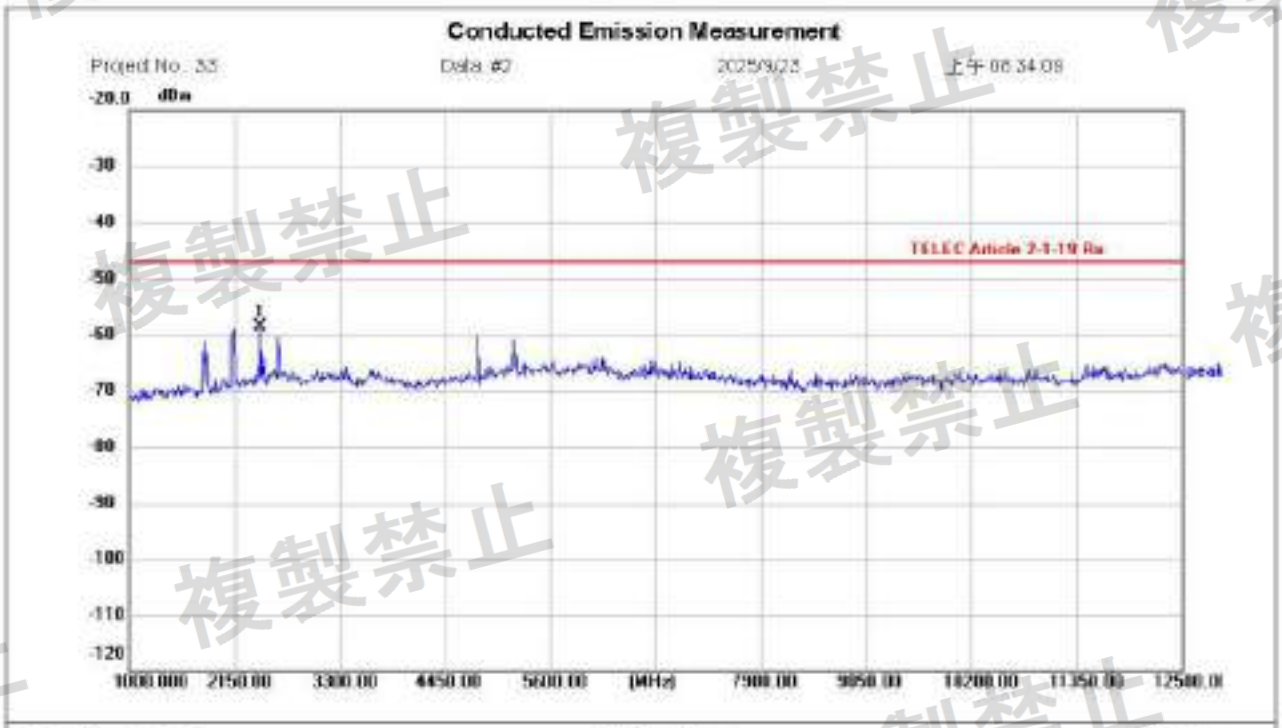


Site: Chamber 04
Limit: TELEC Article 2-1-19 Rx
EUT: W6M22508-24659
M/N:
Mode: Rx BLE 1M CH00
Note:

Polarization:
Power: 3.3 Vdc
Distance:

Temperature: 23.8 (°C)
Humidity: 56 %RH

No	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	2437.500	-68.96	10.36	-58.60	-47.00	-11.60	peak			P	

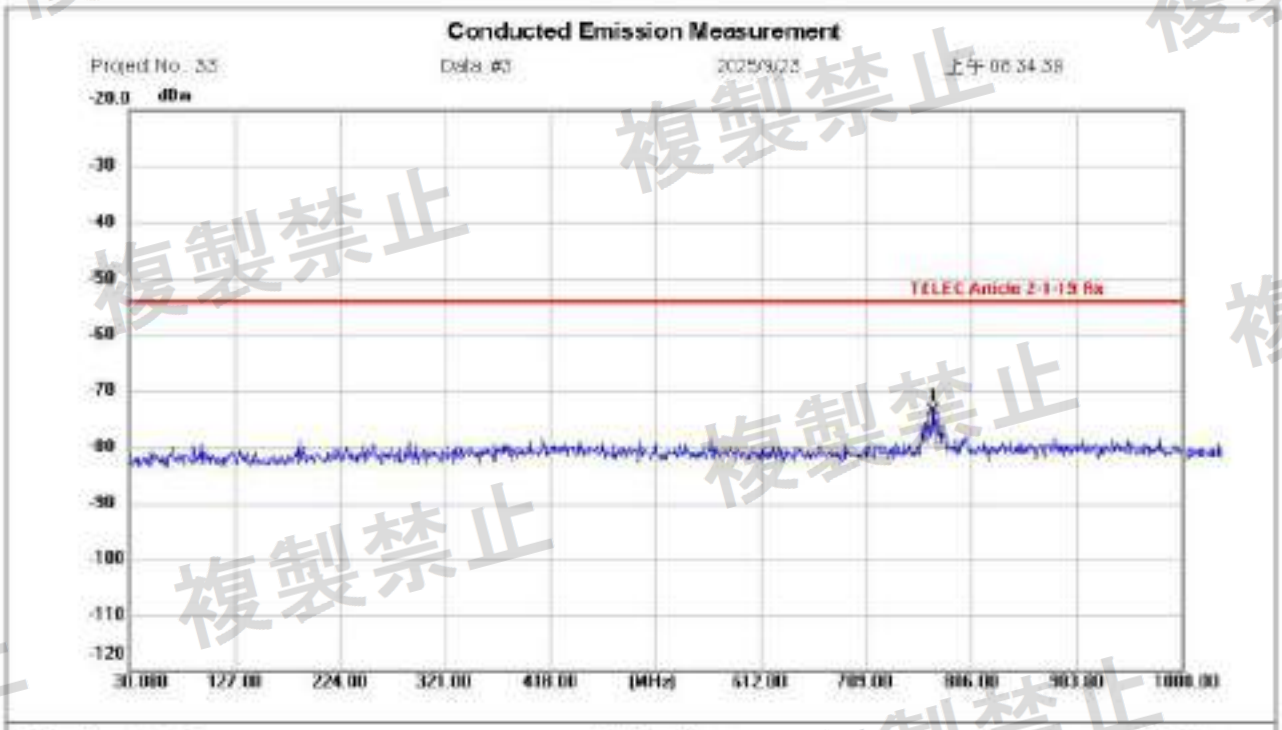


Site: Chamber 04
Limit: TELEC Article 2-1-19 Rx
EUT: W6M22508-24659
M/N:
Mode: Rx BLE 1M CH19
Note:

Polarization:
Power: 3.3 Vdc
Distance:

Temperature: 23.8 (C)
Humidity: 56 %RH

No	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	771.0800	-83.70	10.12	-73.58	-54.00	-19.58	peak			P	

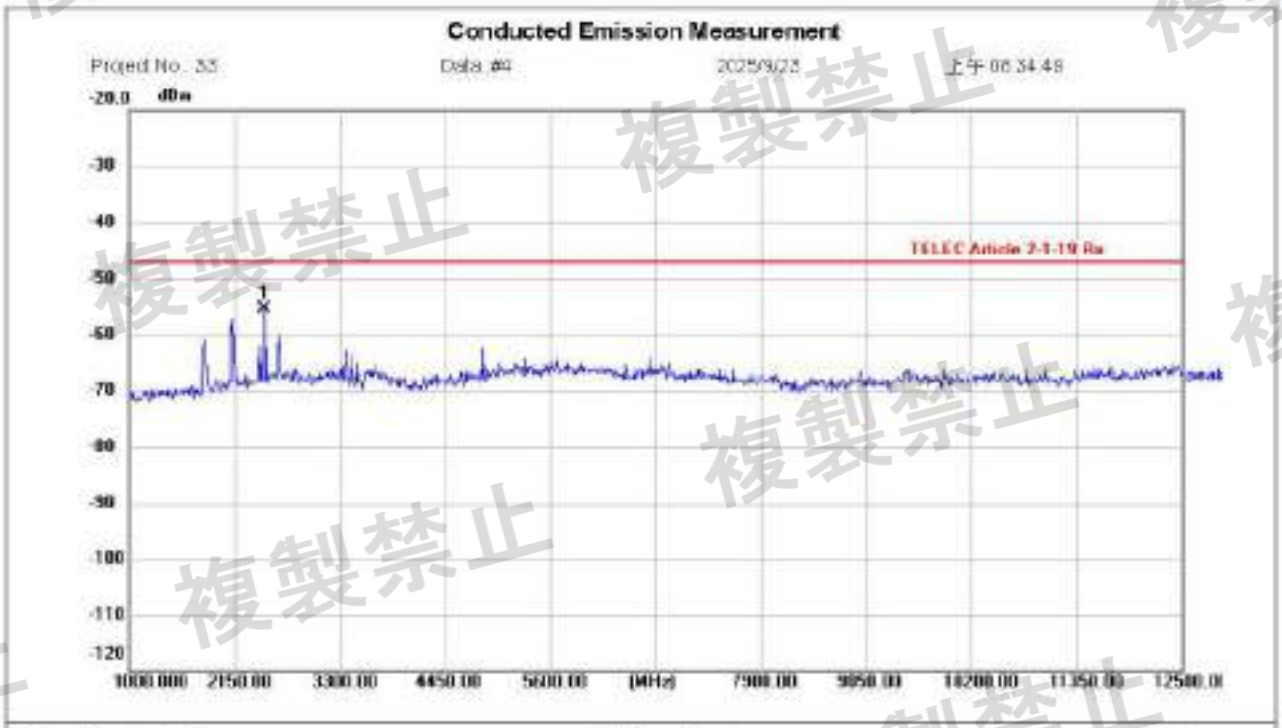


Site: Chamber 04
Limit: TELEC Article 2-1-19 Rx
EUT: W6M22508-24659
M/N:
Mode: Rx BLE 1M CH19
Note:

Polarization:
Power: 3.3 Vdc
Distance:

Temperature: 23.8 (C)
Humidity: 56 %RH

No	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	2483.500	-65.65	10.36	-55.29	-47.00	-8.29	peak			P	

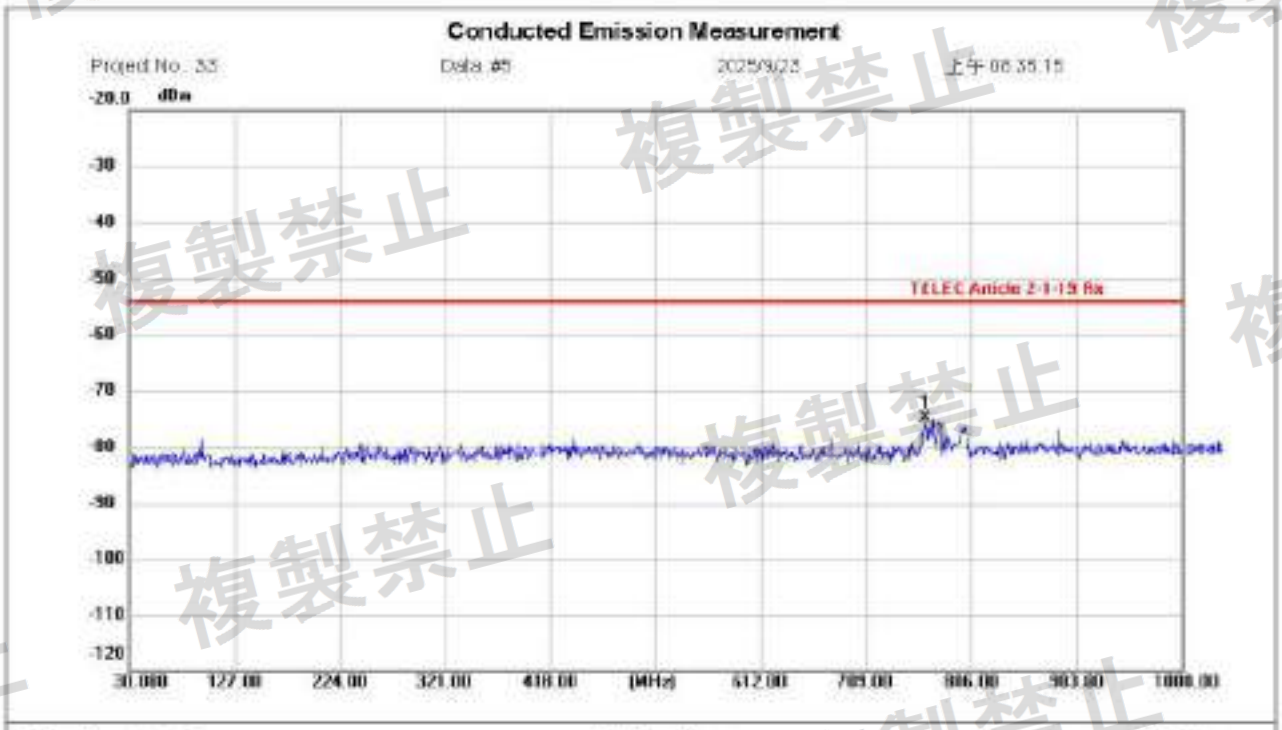


Site: Chamber 04
Limit: TELEC Article 2-1-19 Rx
EUT: W6M22508-24659
M/N:
Mode: Rx BLE 1M CH39
Note:

Polarization:
Power: 3.3 Vdc
Distance:

Temperature: 23.8 (C)
Humidity: 56 %RH

No	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	763.3200	-85.08	10.12	-74.96	-54.00	-20.96	peak			P	

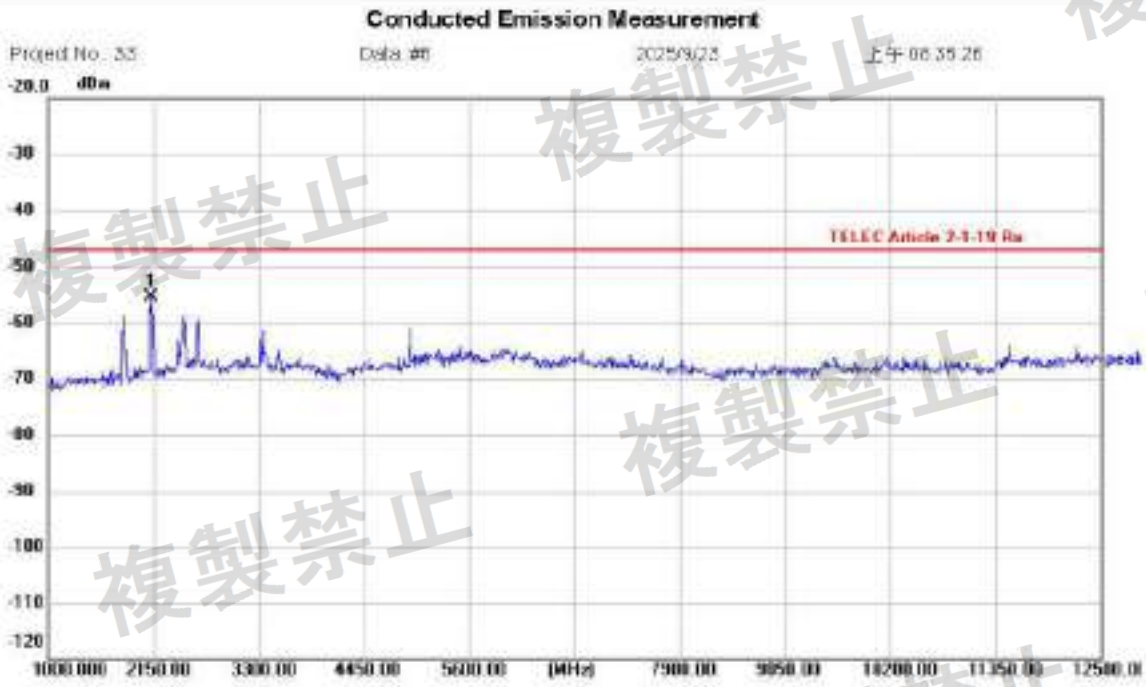


Site: Chamber 04
Limit: TELEC Article 2-1-19 Rx
EUT: W6M22508-24659
M/N:
Mode: Rx BLE 1M CH39
Note:

Polarization:
Power: 3.3 Vdc
Distance:

Temperature: 23.8 (°C)
Humidity: 56 %RH

No	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	2127.000	-65.79	10.32	-55.47	-47.00	-8.47	peak			P	

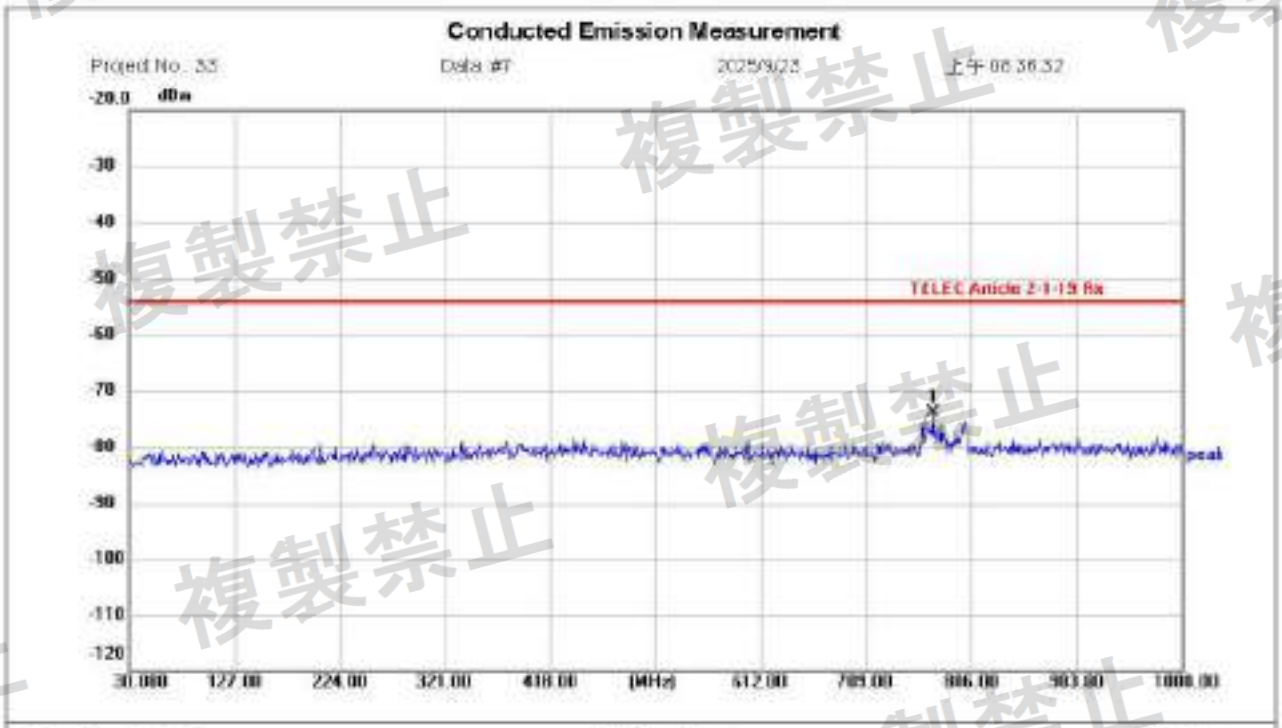


Site: Chamber 04
Limit: TELEC Article 2-1-19 Rx
EUT: W6M22508-24659
M/N:
Mode: Rx BLE 2M CH00
Note:

Polarization:
Power: 3.3 Vdc
Distance:

Temperature: 23.8 (C)
Humidity: 56 %RH

No	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	771.0800	-83.97	10.12	-73.85	-54.00	-19.85	peak			P	

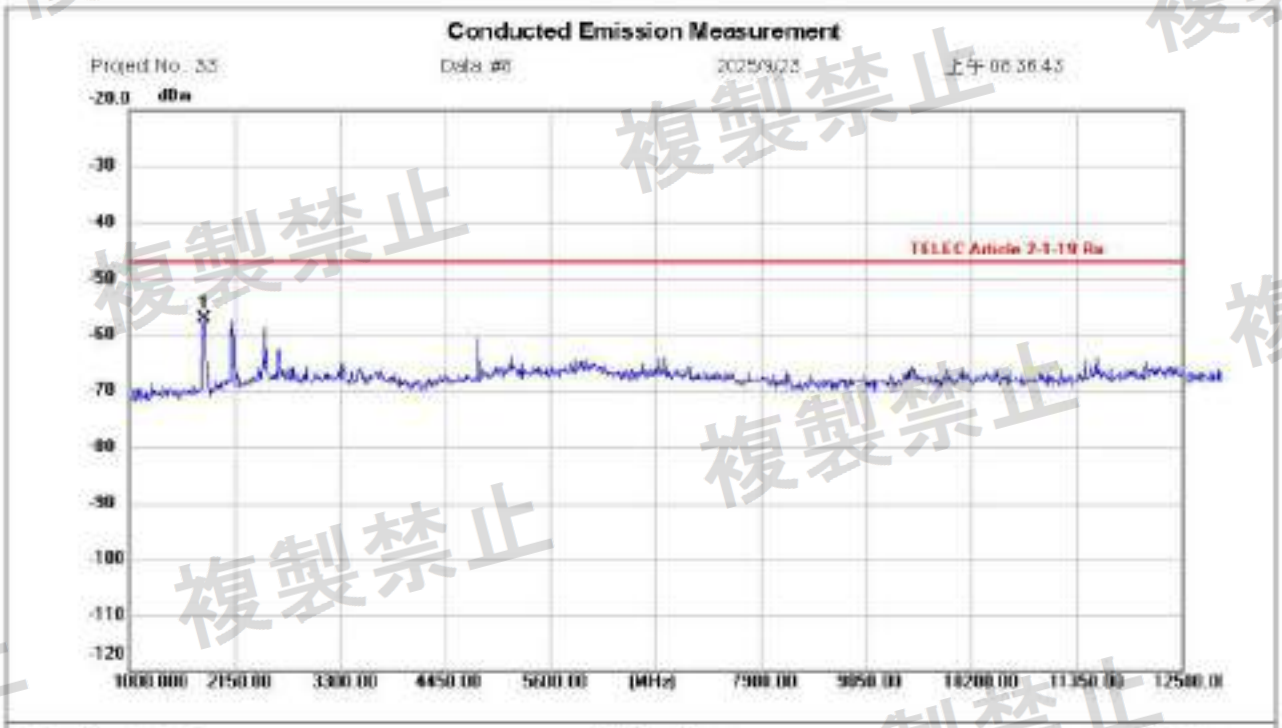


Site: Chamber 04
Limit: TELEC Article 2-1-19 Rx
EUT: W6M22508-24659
M/N:
Mode: Rx BLE 2M CH00
Note:

Polarization:
Power: 3.3 Vdc
Distance:

Temperature: 23.8 (°C)
Humidity: 56 %RH

No	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	1816.500	-67.50	10.28	-57.22	-47.00	-10.22	peak			P	

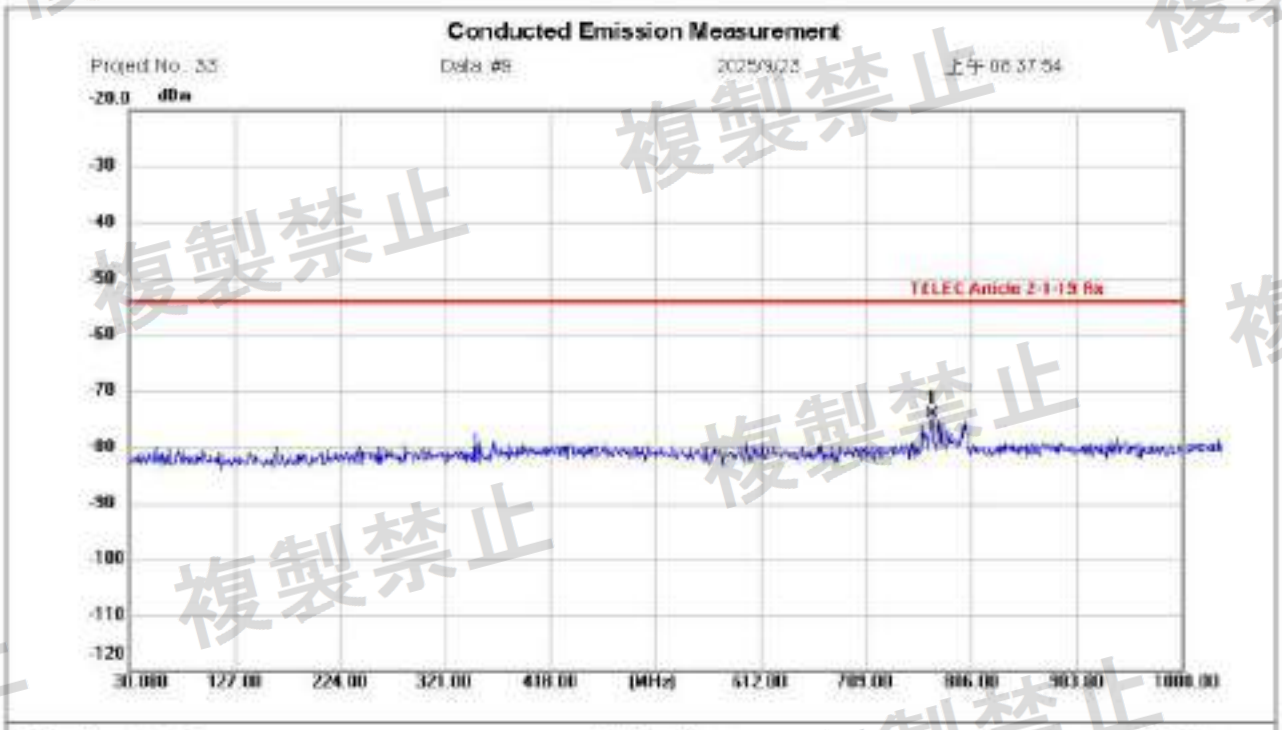


Site: Chamber 04
Limit: TELEC Article 2-1-19 Rx
EUT: W6M22508-24659
M/N:
Mode: Rx BLE 2M CH19
Note:

Polarization:
Power: 3.3 Vdc
Distance:

Temperature: 23.8 (C)
Humidity: 56 %RH

No	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	770.1100	-84.17	10.12	-74.05	-54.00	-20.05	peak			P	

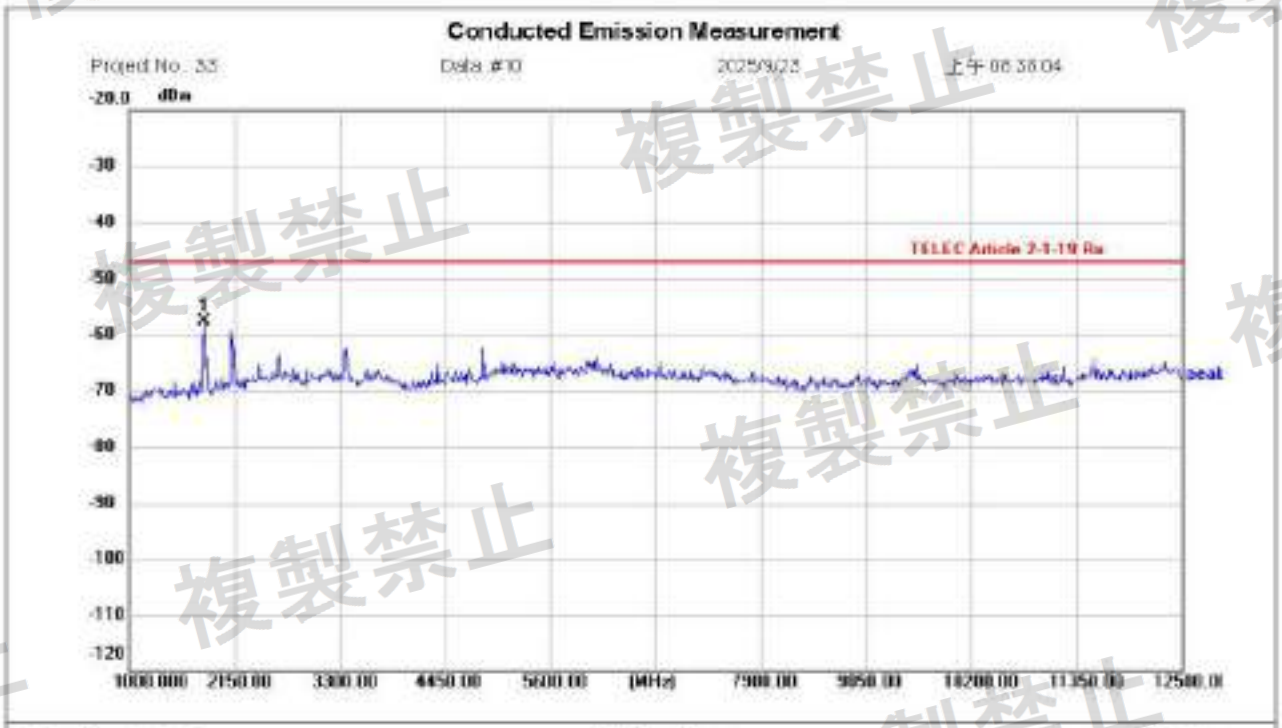


Site: Chamber 04
Limit: TELEC Article 2-1-19 Rx
EUT: W6M22508-24659
M/N:
Mode: Rx BLE 2M CH19
Note:

Polarization:
Power: 3.3 Vdc
Distance:

Temperature: 23.8 (°C)
Humidity: 56 %RH

No	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	1816.500	-67.86	10.28	-57.58	-47.00	-10.58	peak			P	

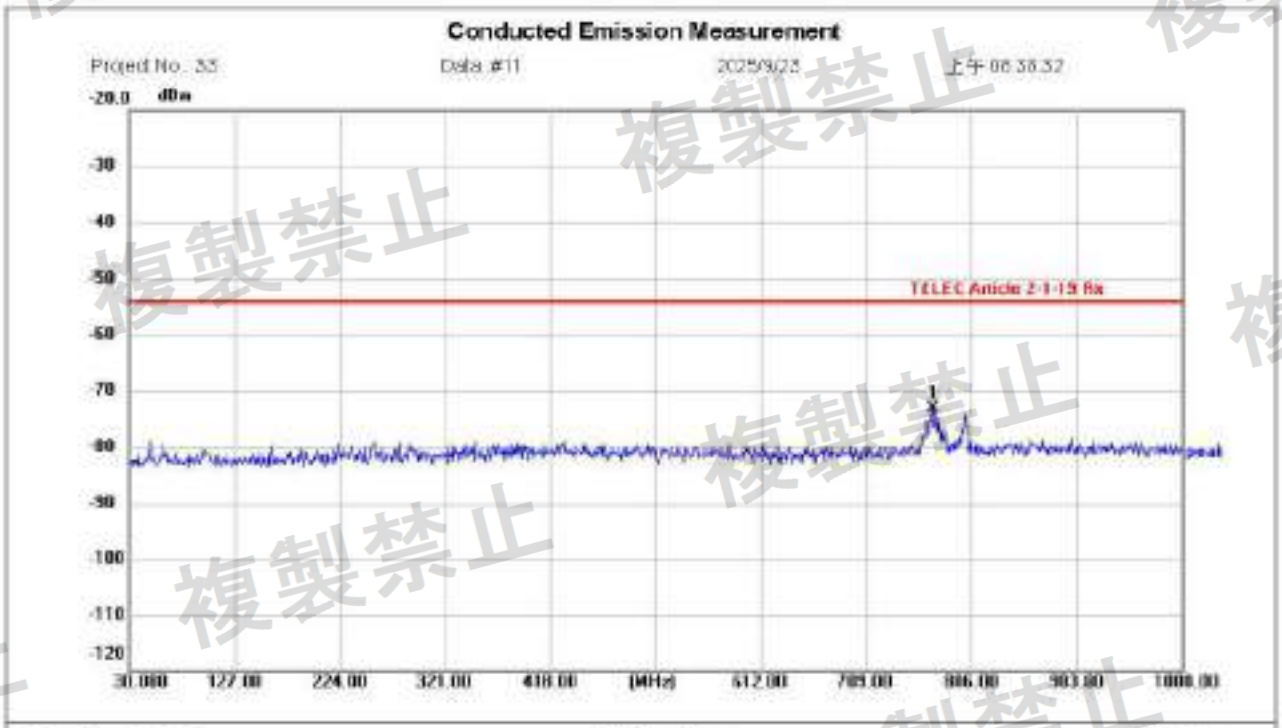


Site: Chamber 04
Limit: TELEC Article 2-1-19 Rx
EUT: W6M22508-24659
M/N:
Mode: Rx BLE 2M CH39
Note:

Polarization:
Power: 3.3 Vdc
Distance:

Temperature: 23.8 (C)
Humidity: 56 %RH

No	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	771.0800	-83.21	10.12	-73.09	-54.00	-19.09	peak			P	

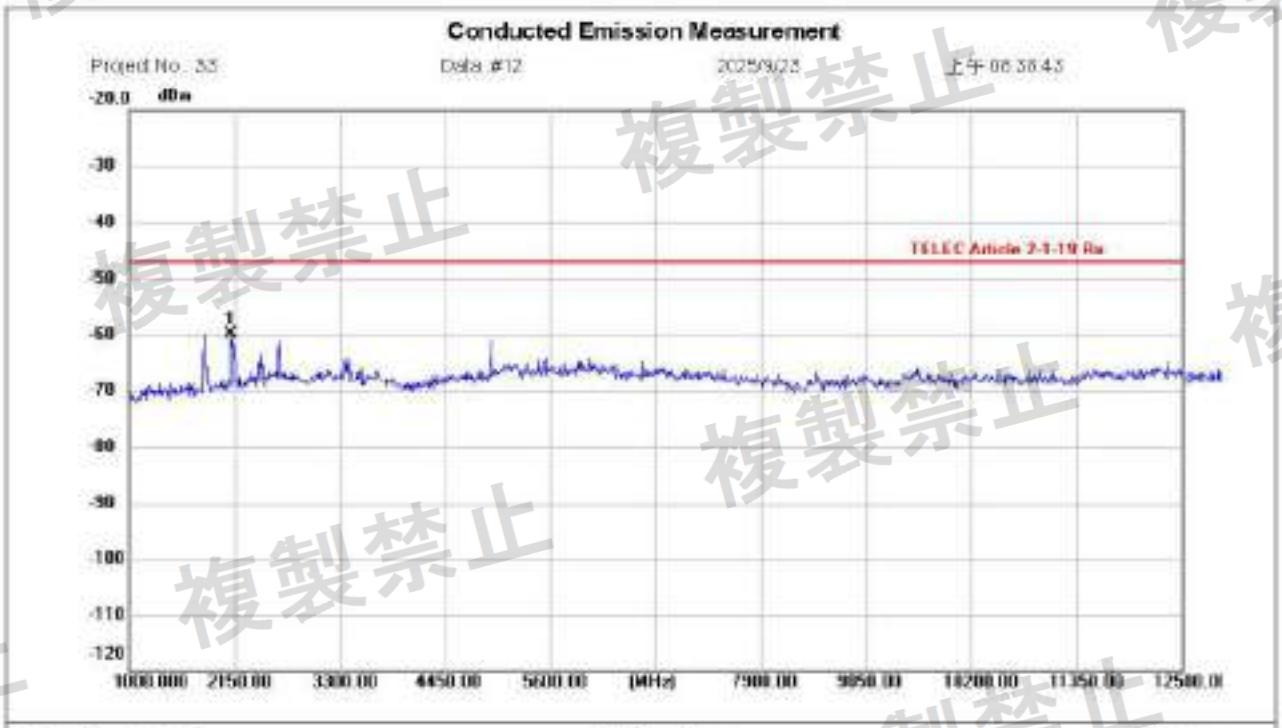


Site: Chamber 04
Limit: TELEC Article 2-1-19 Rx
EUT: W6M22508-24659
M/N:
Mode: Rx BLE 2M CH39
Note:

Polarization:
Power: 3.3 Vdc
Distance:

Temperature: 23.8 (C)
Humidity: 56 %RH

No	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	2115.500	-70.23	10.32	-59.91	-47.00	-12.91	peak			P	

External Antenna

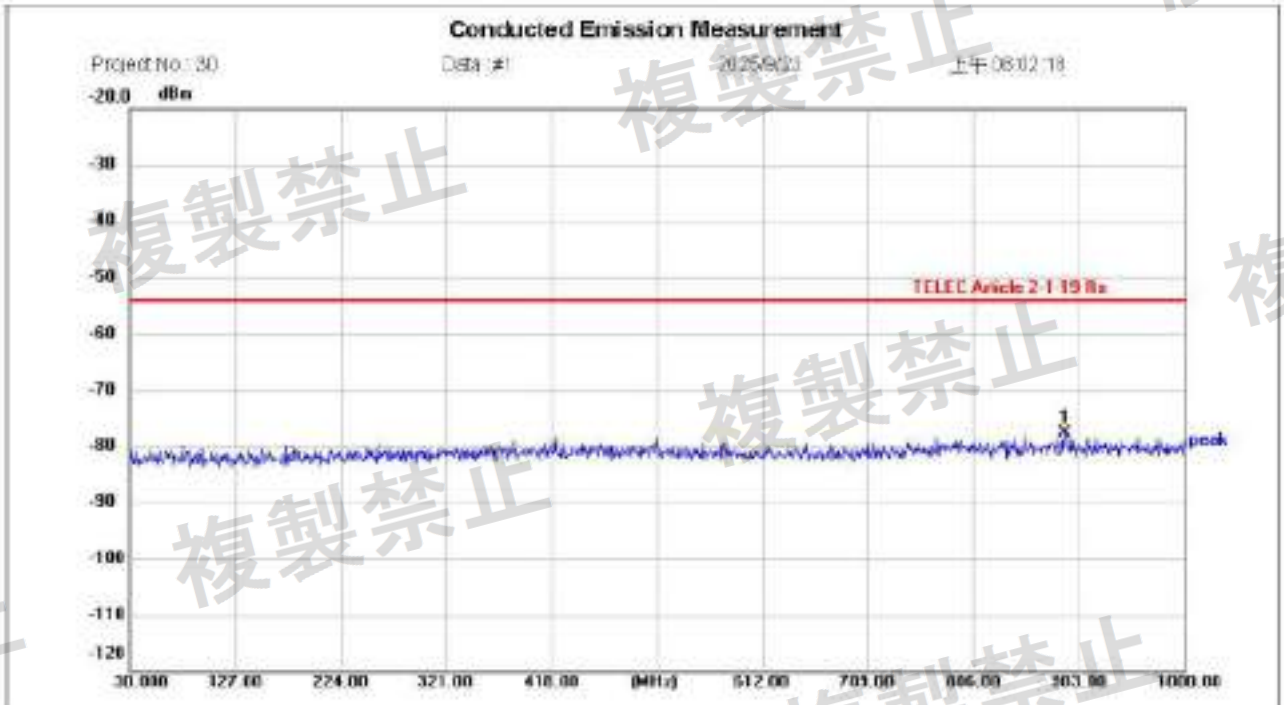


Site: Chamber 04
Limit: TELEC Article 2-1-19 Rx
EUT: W6M22508-24359
M/N:
Mode: Rx BLE 1M CH00
Note:

Polarization:
Power: 3 Vd.c
Distance:

Temperature: 22.8(°C)
Humidity: 58 %RH

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	890.3900	-87.83	10.13	-77.70	-54.00	-23.70	peak			P	

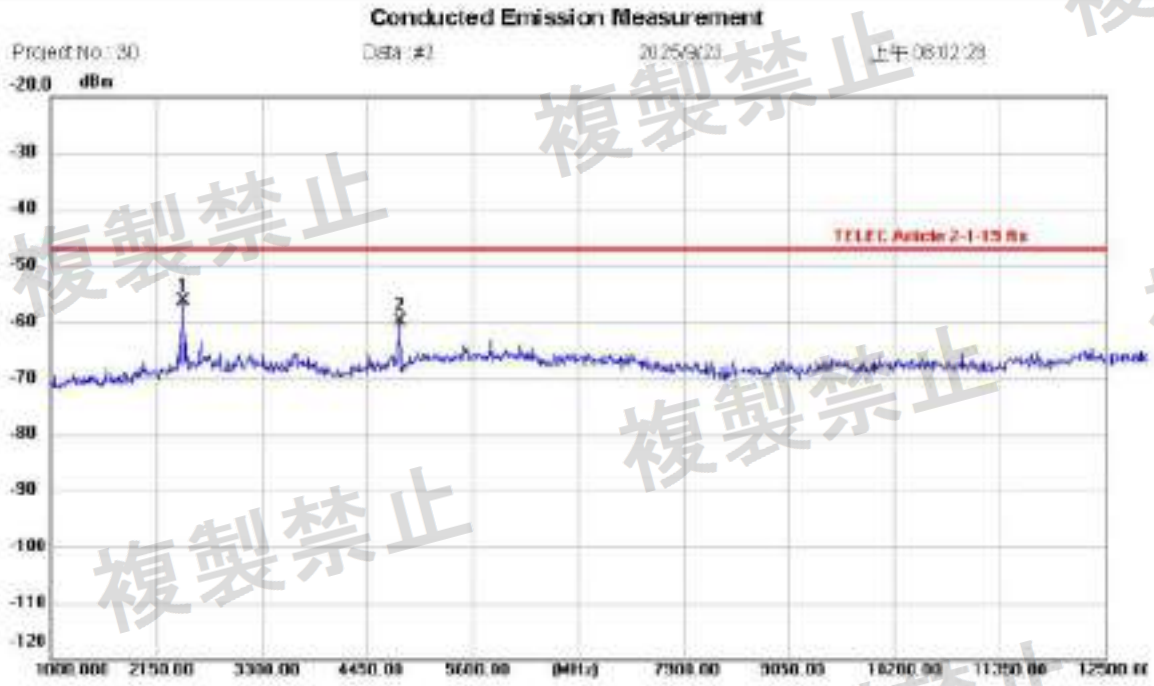


Site: Chamber 04
Limit: TELEC Article 2-1-19 Rx
EUT: W6M22508-24659
M/N:
Mode: Rx BLE 1M CH00
Note:

Polarization:
Power: 3 Vd.c
Distance:

Temperature: 22.8(°C)
Humidity: 58 %RH

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	2449.000	-66.82	10.36	-56.46	-47.00	-9.46	peak			P	
2	4806.500	-70.41	10.60	-59.81	-47.00	-12.81	peak			P	

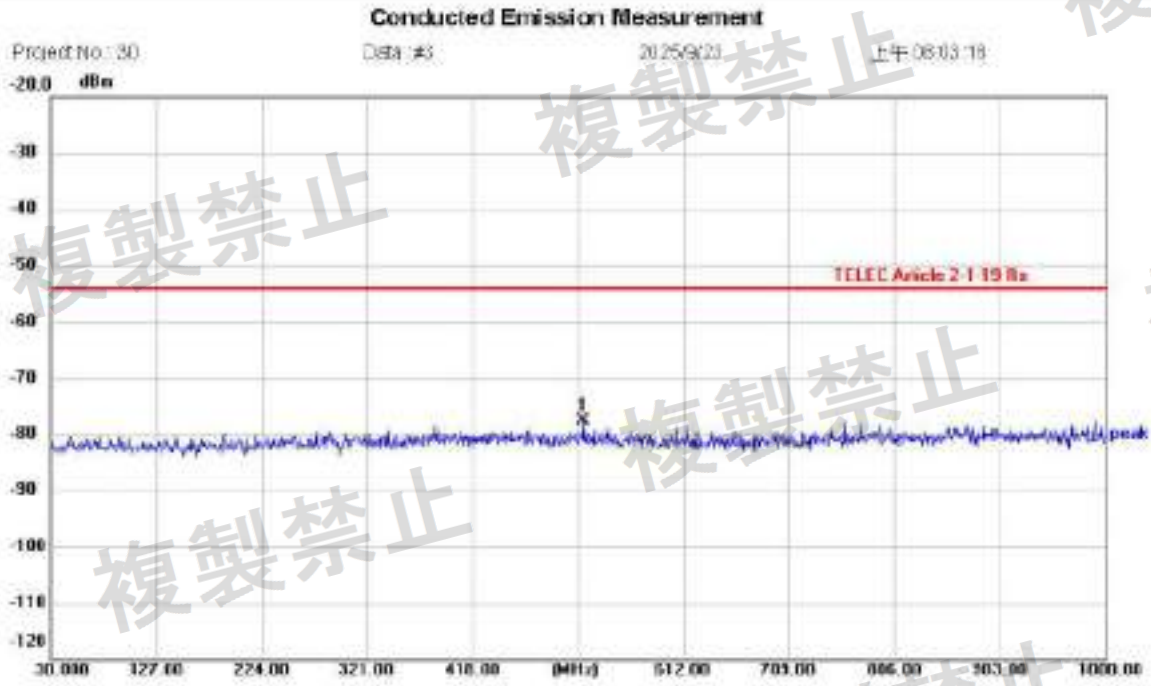


Site: Chamber 04
Limit: TELEC Article 2-1-19 Rx
EUT: W6M22508-24659
M/N:
Mode: Rx BLE 1M CH19
Note:

Polarization:
Power: 3 Vd.c
Distance:

Temperature: 22.8(°C)
Humidity: 56 %RH

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	519.8500	-87.64	10.03	-77.61	-54.00	-23.61	peak			P	

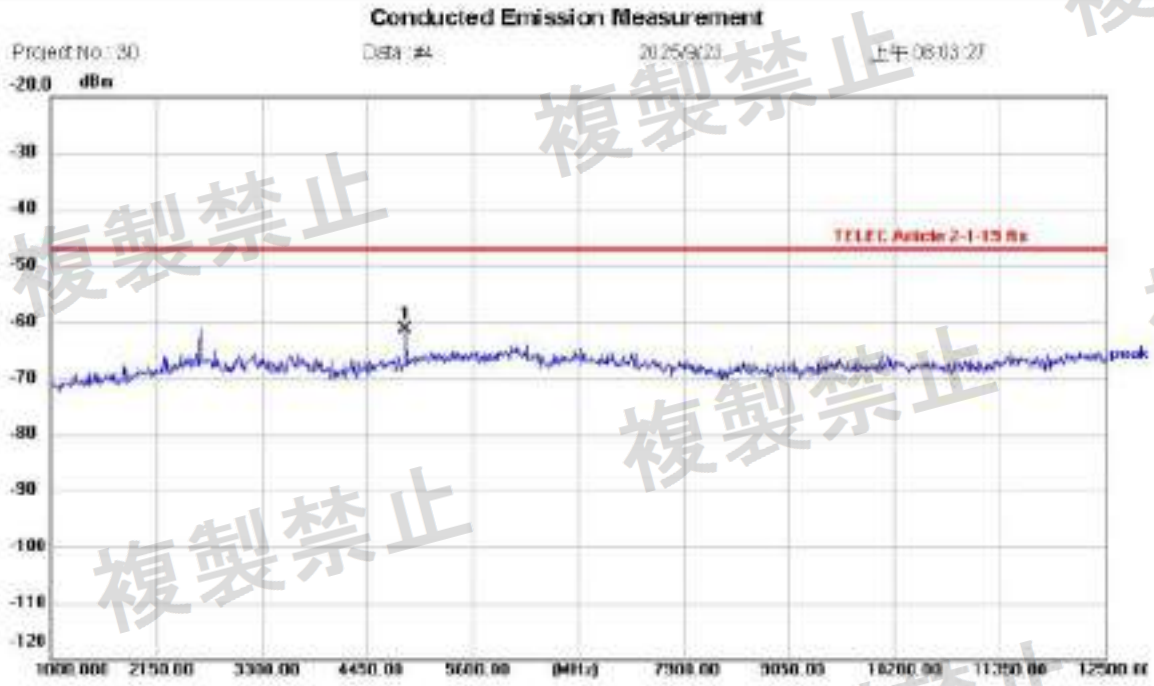


Site: Chamber 04
Limit: TELEC Article 2-1-19 Rx
EUT: W6M22508-24659
M/N:
Mode: Rx BLE 1M CH19
Note:

Polarization:
Power: 3 Vd.c
Distance:

Temperature: 22.8(°C)
Humidity: 56 %RH

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	4875.500	-71.83	10.57	-61.26	-47.00	-14.26	peak			P	

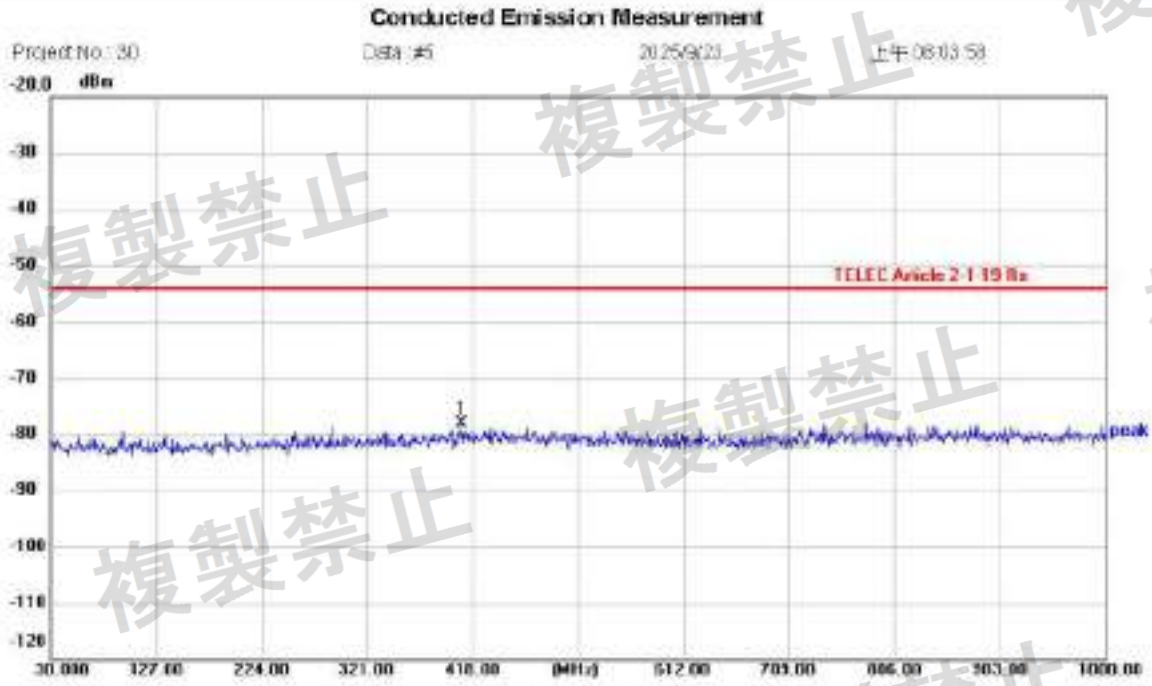


Site: Chamber 04
Limit: TELEC Article 2-1-19 Rx
EUT: W6M22508-24659
M/N:
Mode: Rx BLE 1M CH39
Note:

Polarization:
Power: 3 Vd.c
Distance:

Temperature: 22.8(°C)
Humidity: 58 %RH

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	408.3000	-88.23	10.01	-78.22	-54.00	-24.22	peak			P	

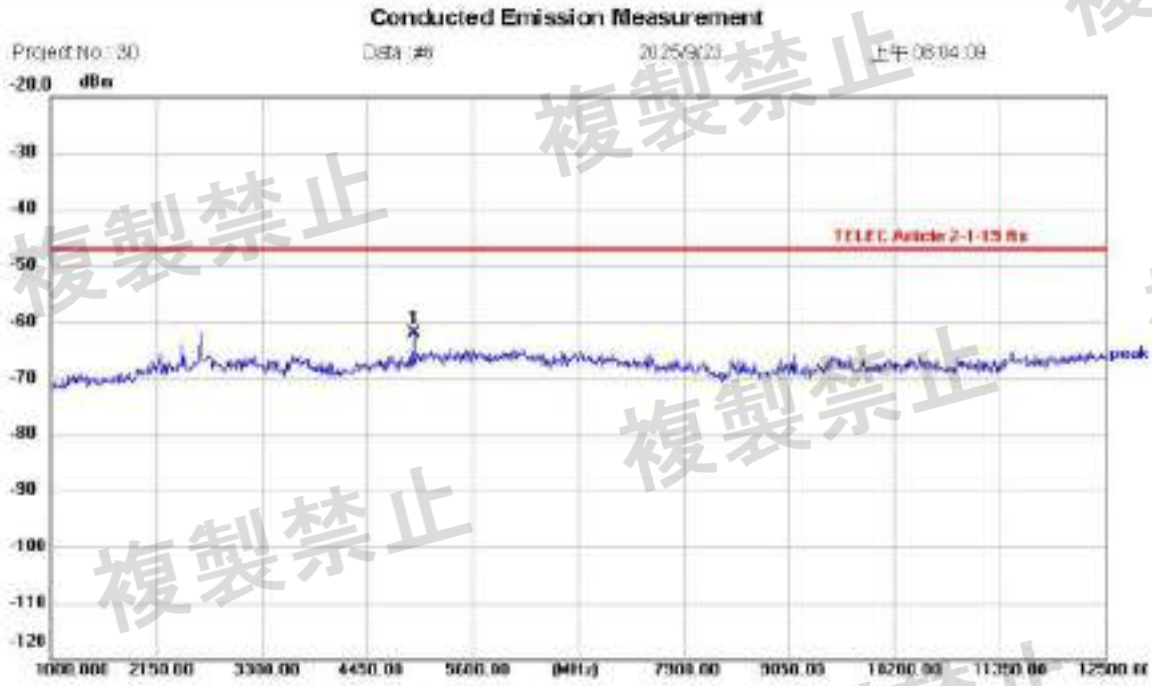


Site: Chamber 04
Limit: TELEC Article 2-1-19 Rx
EUT: W6M22508-24659
M/N:
Mode: Rx BLE 1M CH39
Note:

Polarization:
Power: 3 Vd.c
Distance:

Temperature: 22.8(°C)
Humidity: 56 %RH

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	4956.000	-72.84	10.61	-62.23	-47.00	-15.23	peak			P	

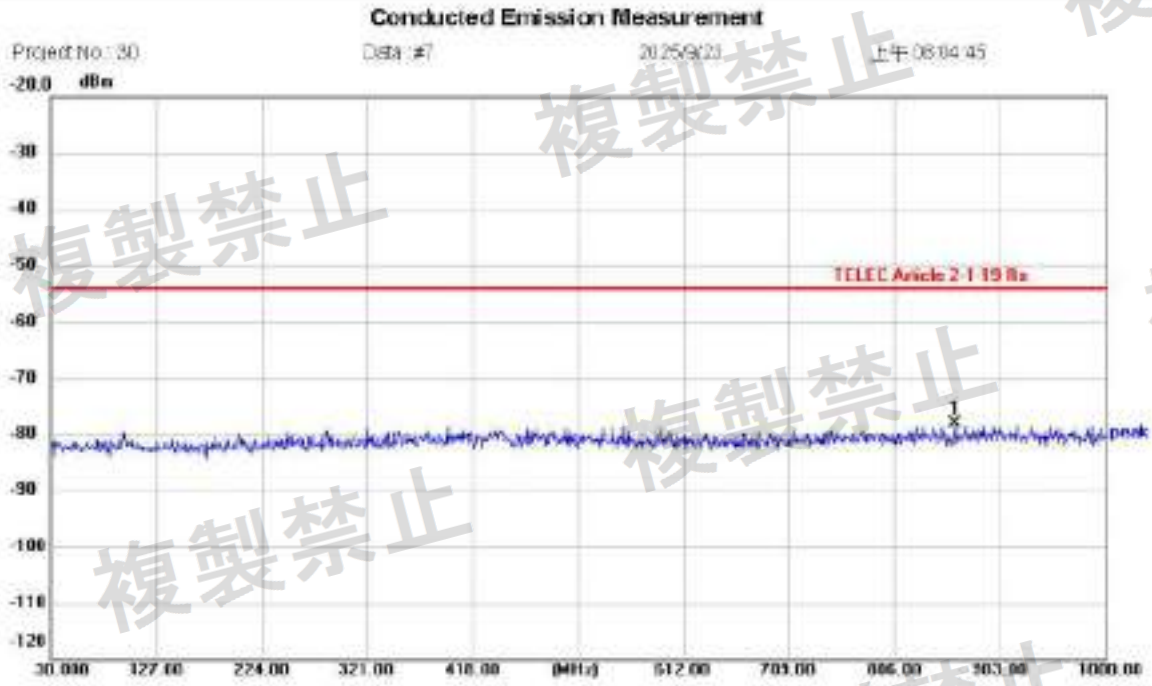


Site: Chamber 04
Limit: TELEC Article 2-1-19 Rx
EUT: W6M22508-24659
M/N:
Mode: Rx BLE 2M CH00
Note:

Polarization:
Power: 3 Vd.c
Distance:

Temperature: 22.8(°C)
Humidity: 58 %RH

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	862.2600	-88.32	10.14	-78.18	-54.00	-24.18	peak			P	

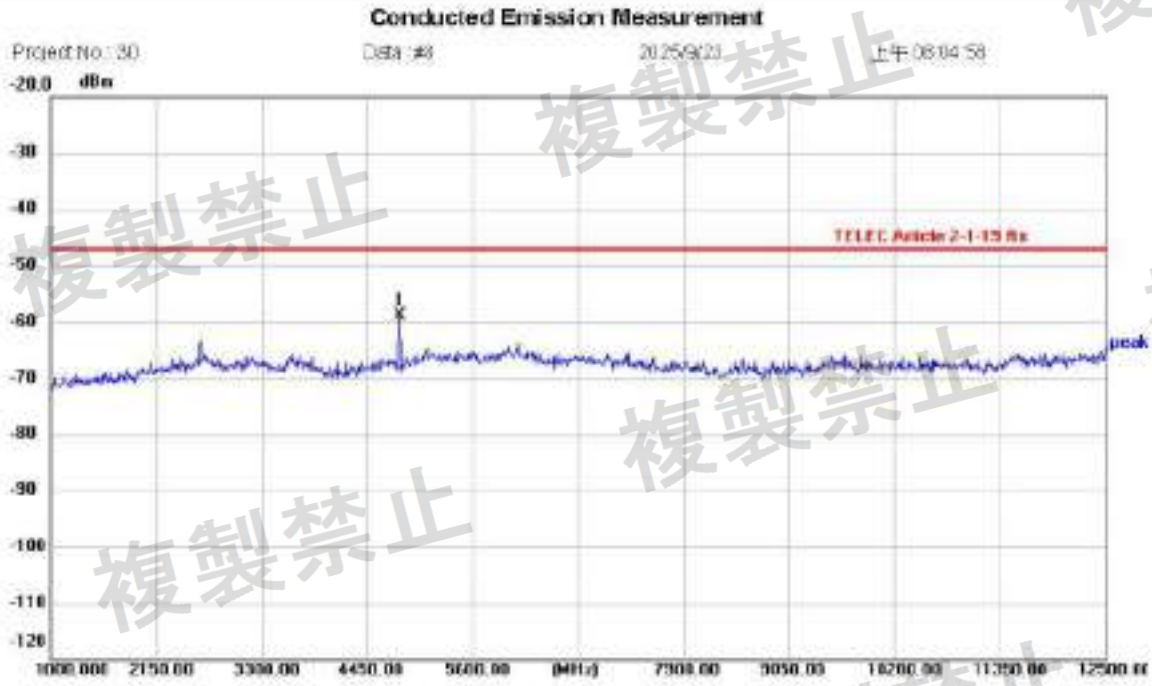


Site: Chamber 04
Limit: TELEC Article 2-1-19 Rx
EUT: W6M22508-24659
M/N:
Mode: Rx BLE 2M CH00
Note:

Polarization:
Power: 3 Vd.c
Distance:

Temperature: 22.8(°C)
Humidity: 58 %RH

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	4806.500	-69.53	10.60	-58.93	-47.00	-11.93	peak			P	

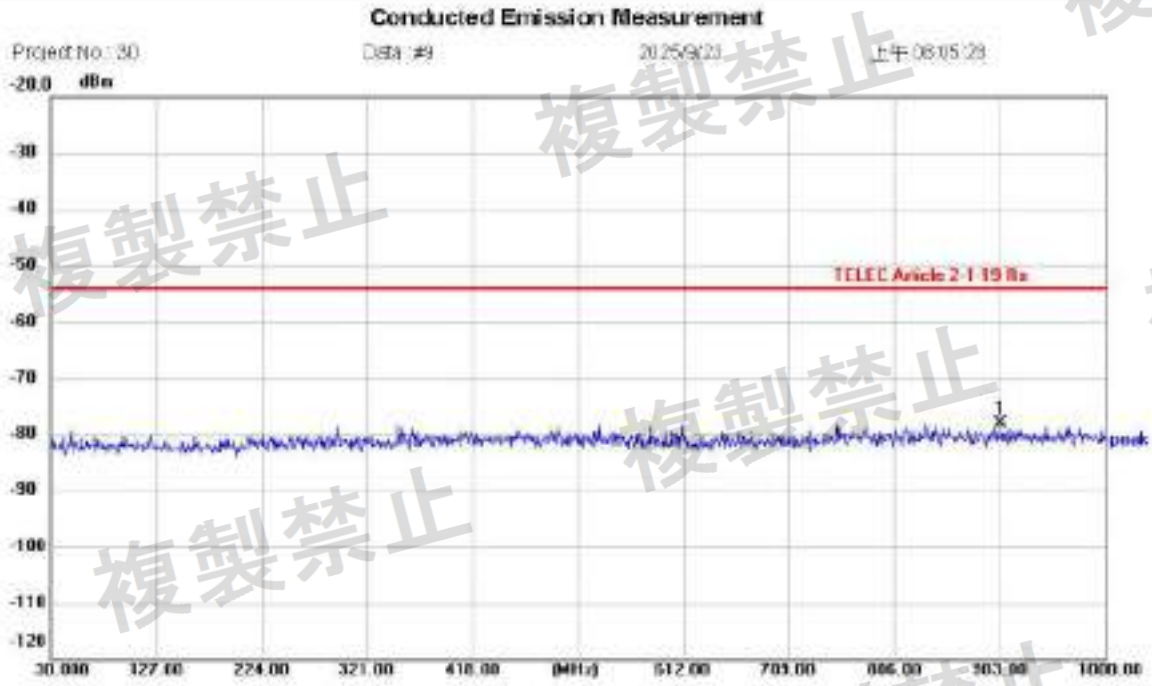


Site: Chamber 04
Limit: TELEC Article 2-1-19 Rx
EUT: W6M22508-24659
M/N:
Mode: Rx BLE 2M CH19
Note:

Polarization:
Power: 3 Vd.c
Distance:

Temperature: 22.8(°C)
Humidity: 58 %RH

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	903.9700	-88.16	10.13	-78.03	-54.00	-24.03	peak			P	

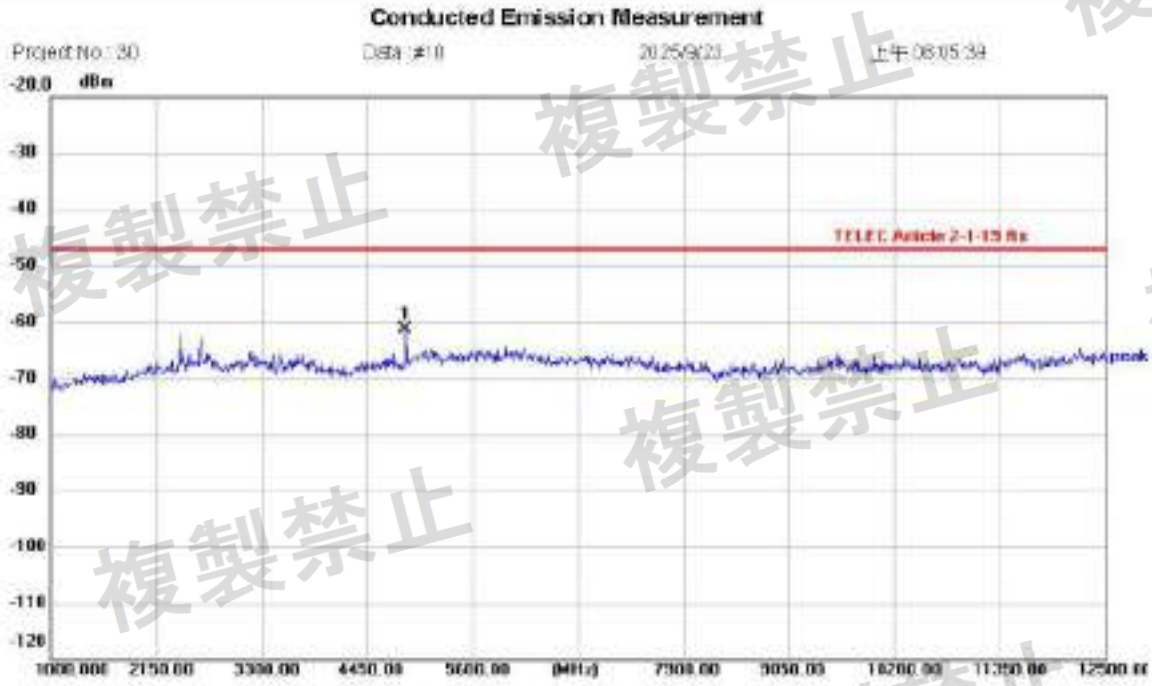


Site: Chamber 04
Limit: TELEC Article 2-1-19 Rx
EUT: W6M22508-24659
M/N:
Mode: Rx BLE 2M CH19
Note:

Polarization:
Power: 3 Vd.c
Distance:

Temperature: 22.8(°C)
Humidity: 58 %RH

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	4875.500	-71.90	10.57	-61.33	-47.00	-14.33	peak			P	

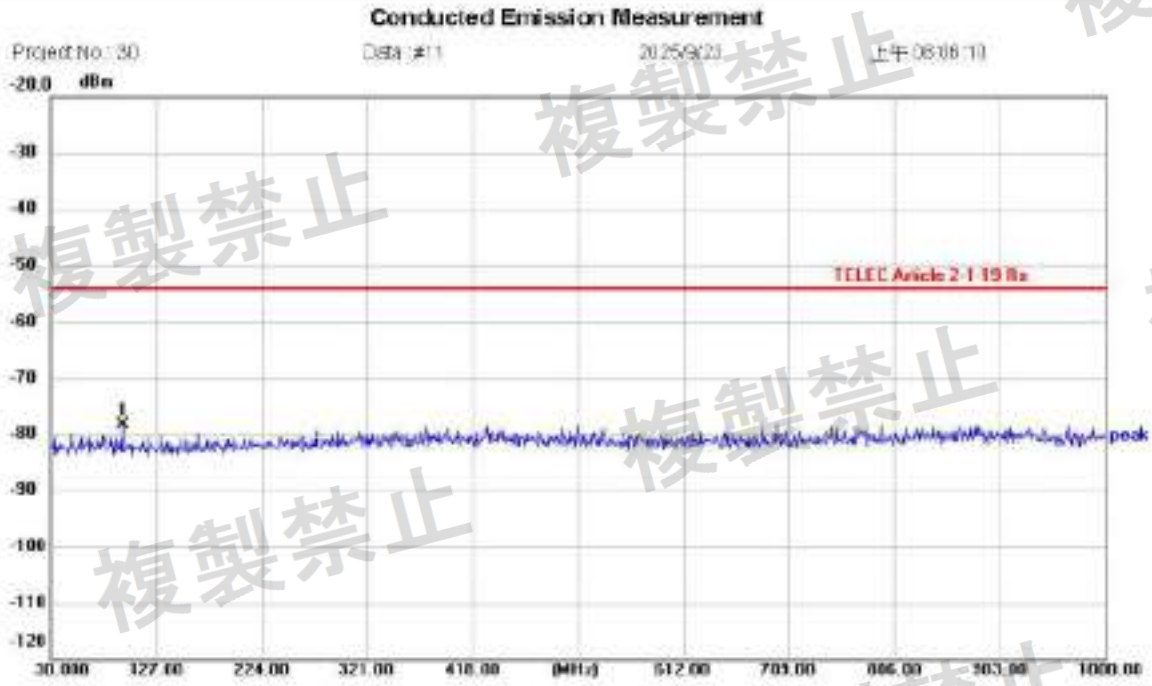


Site: Chamber 04
Limit: TELEC Article 2-1-19 Rx
EUT: W6M22508-24659
M/N:
Mode: Rx BLE 2M CH39
Note:

Polarization:
Power: 3 Vd.c
Distance:

Temperature: 22.8(°C)
Humidity: 56 %RH

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	95.9600	-88.18	9.88	-78.30	-54.00	-24.30	peak			P	

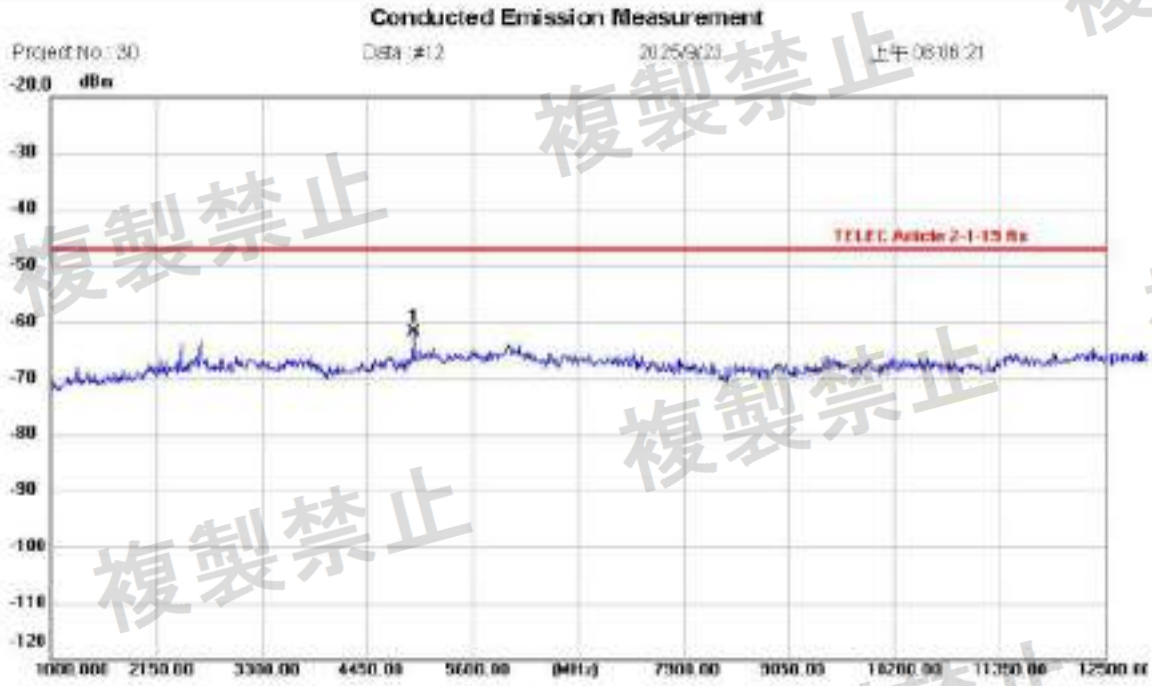


Site: Chamber 04
Limit: TELEC Article 2-1-19 Rx
EUT: W6M22508-24659
M/N:
Mode: Rx BLE 2M CH39
Note:

Polarization:
Power: 3 Vd.c
Distance:

Temperature: 22.8(°C)
Humidity: 56 %RH

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	4956.000	-72.41	10.61	-61.80	-47.00	-14.80	peak			P	

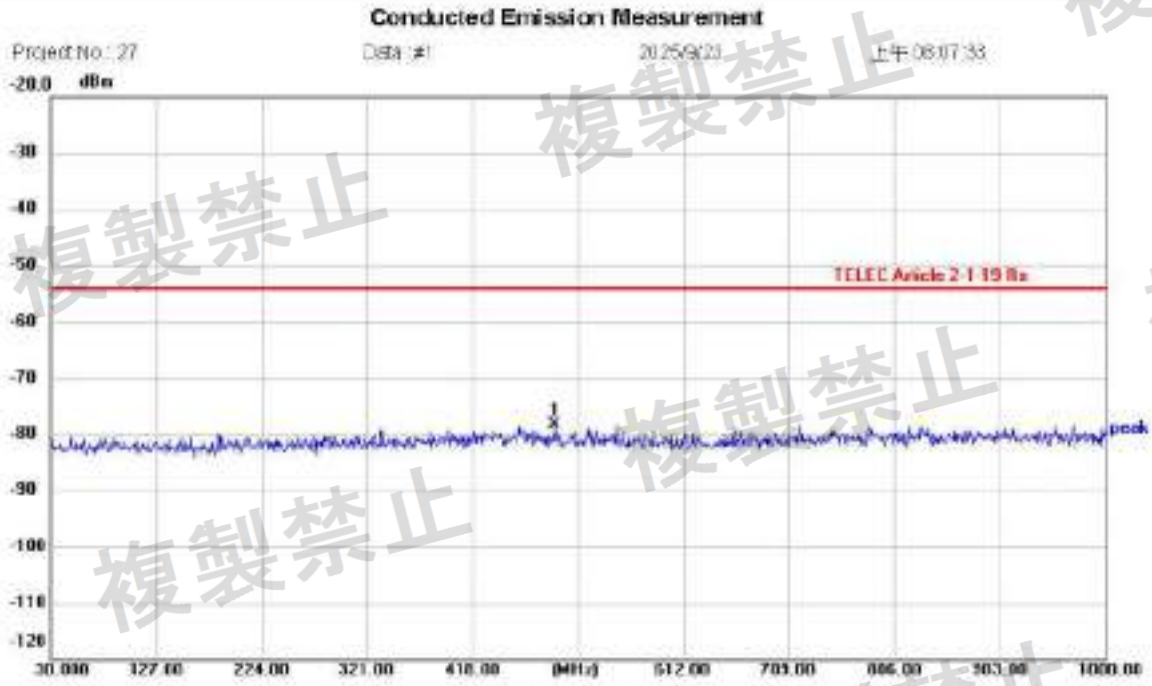


Site: Chamber 04
Limit: TELEC Article 2-1-19 Rx
EUT: W6M22508-24659
M/N:
Mode: Rx BLE 1M CH00
Note:

Polarization:
Power: 2.7 Vdc
Distance:

Temperature: 22.8(°C)
Humidity: 56 %RH

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	403.9600	-88.46	10.03	-78.43	-54.00	-24.43	peak			P	

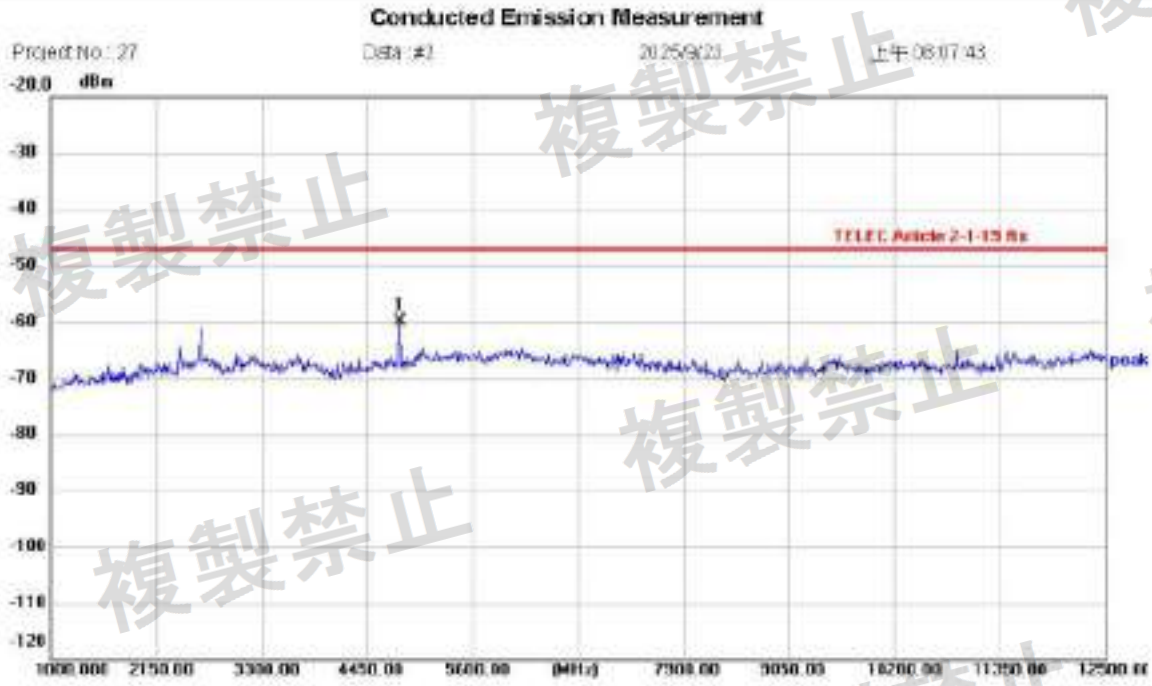


Site Chamber 04
Limit: TELEC Article 2-1-19 Rx
EUT: W6M22508-24659
M/N:
Mode: Rx BLE 1M CH00
Note:

Polarization:
Power: 2.7 Vdc
Distance:

Temperature: 22.8(°C)
Humidity: 58 %RH

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	4806.500	-70.48	10.80	-59.88	-47.00	-12.88	peak			P	

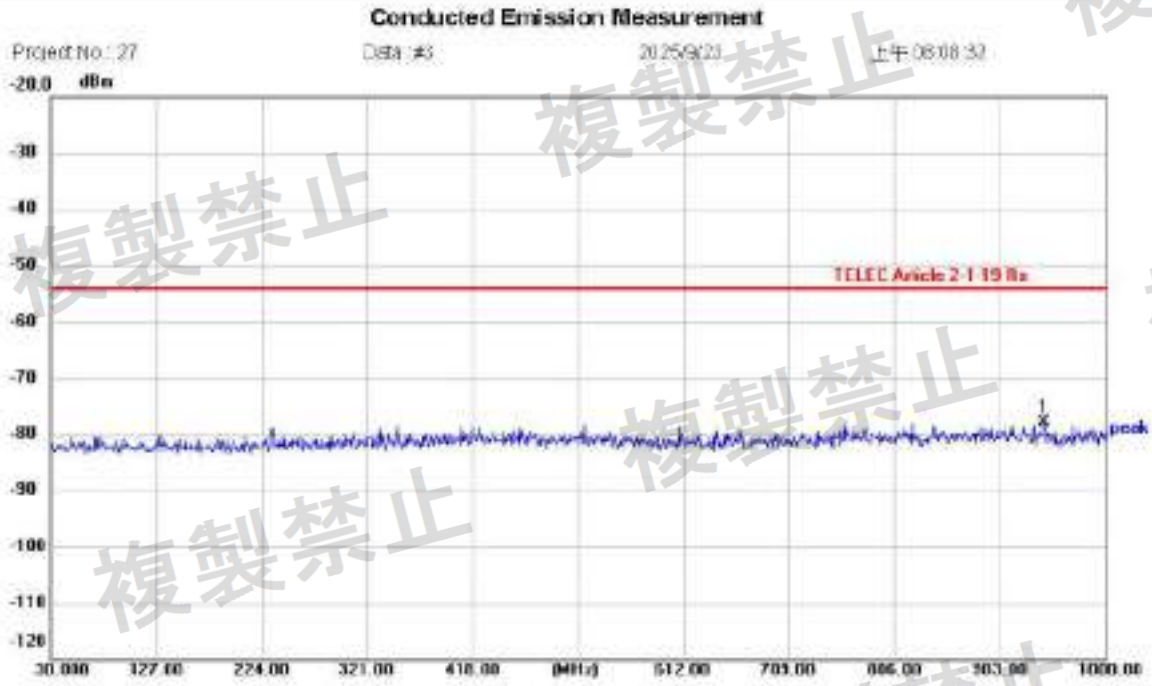


Site: Chamber 04
Limit: TELEC Article 2-1-19 Rx
EUT: W6M22508-24659
M/N:
Mode: Rx BLE 1M CH19
Note:

Polarization:
Power: 2.7 Vdc
Distance:

Temperature: 22.8(°C)
Humidity: 56 %RH

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	943.7400	-88.13	10.15	-77.98	-54.00	-23.98	peak			P	

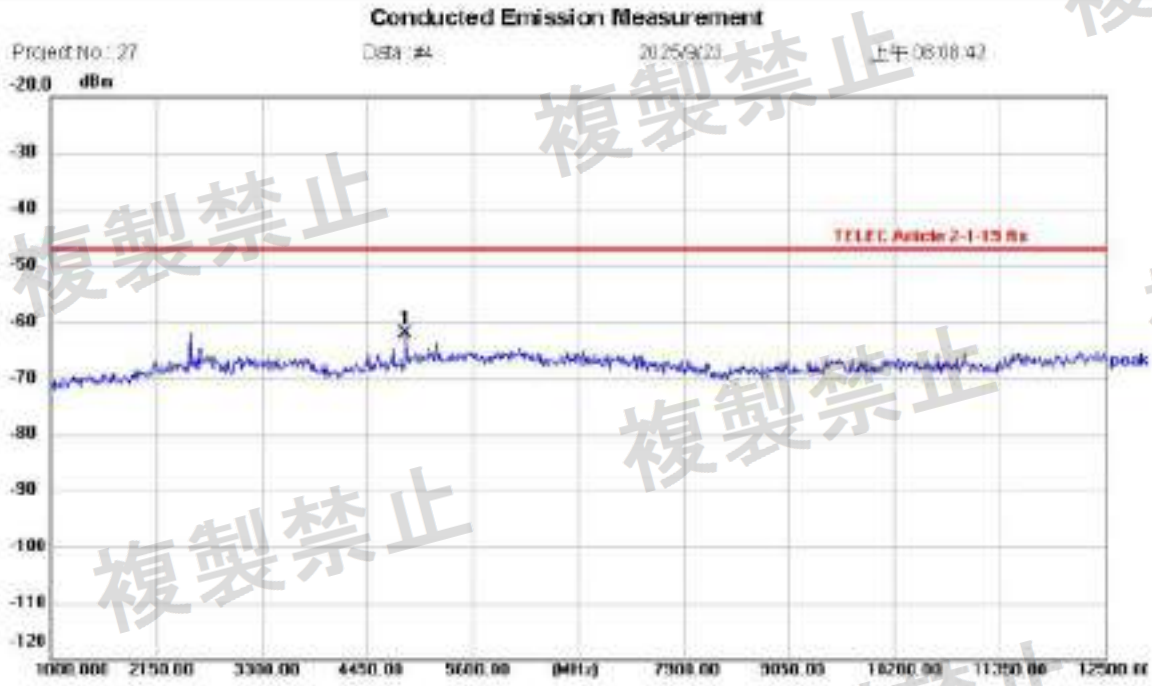


Site: Chamber 04
Limit: TELEC Article 2-1-19 Rx
EUT: W6M22508-24659
M/N:
Mode: Rx BLE 1M CH19
Note:

Polarization:
Power: 2.7 Vdc
Distance:

Temperature: 22.8(°C)
Humidity: 56 %RH

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	4875.500	-72.66	10.57	-62.09	-47.00	-15.09	peak			P	

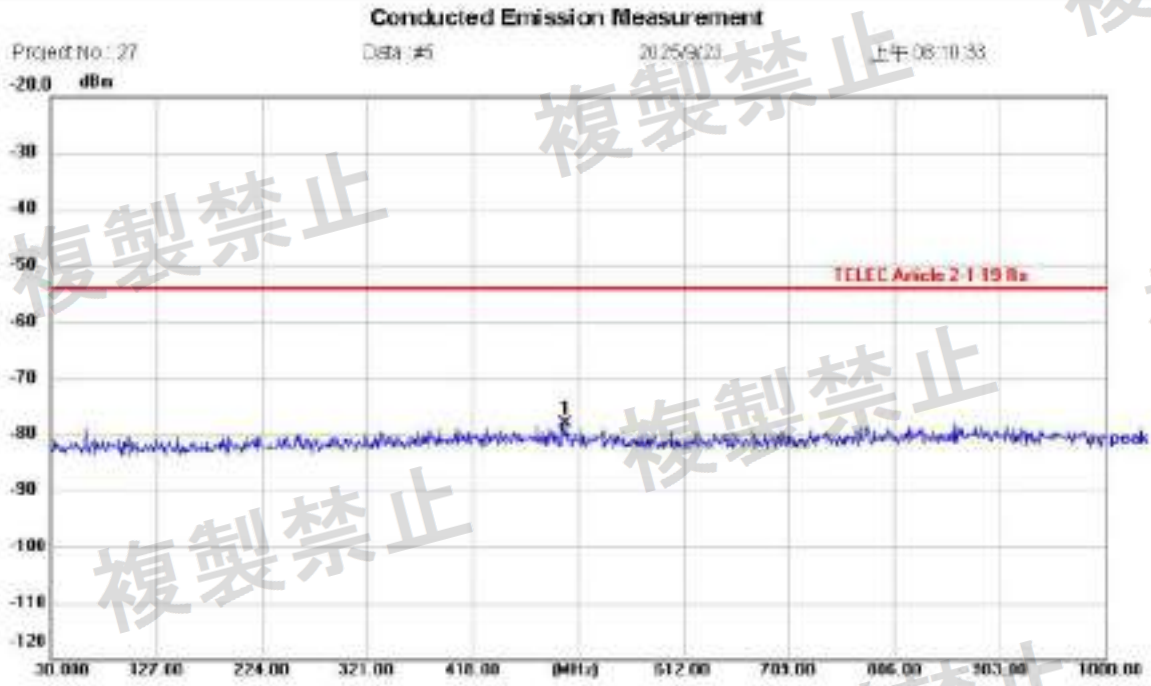


Site: Chamber 04
Limit: TELEC Article 2-1-19 Rx
EUT: W6M22508-24659
M/N:
Mode: Rx BLE 1M CH39
Note:

Polarization:
Power: 2.7 Vdc
Distance:

Temperature: 22.8(°C)
Humidity: 58 %RH

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	504.3300	-88.05	10.03	-78.02	-54.00	-24.02	peak			P	

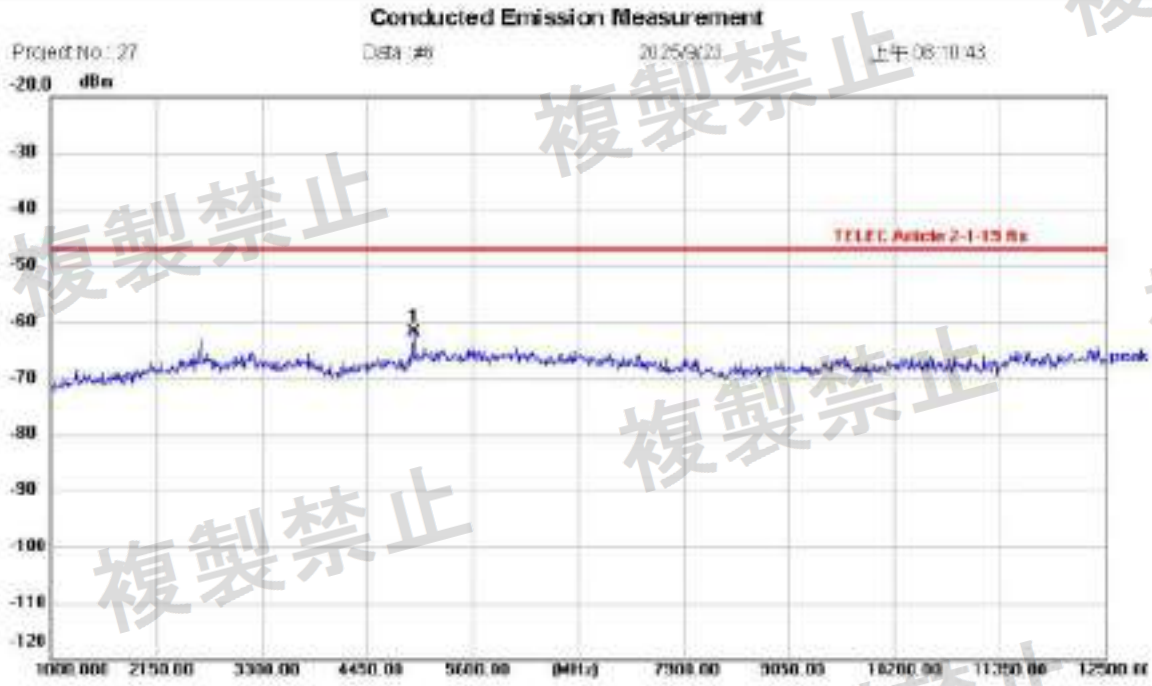


Site: Chamber 04
Limit: TELEC Article 2-1-19 Rx
EUT: W6M22508-24659
M/N:
Mode: Rx BLE 1M CH39
Note:

Polarization:
Power: 2.7 Vdc
Distance:

Temperature: 22.8(°C)
Humidity: 56 %RH

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	4956.000	-72.38	10.61	-61.77	-47.00	-14.77	peak			P	

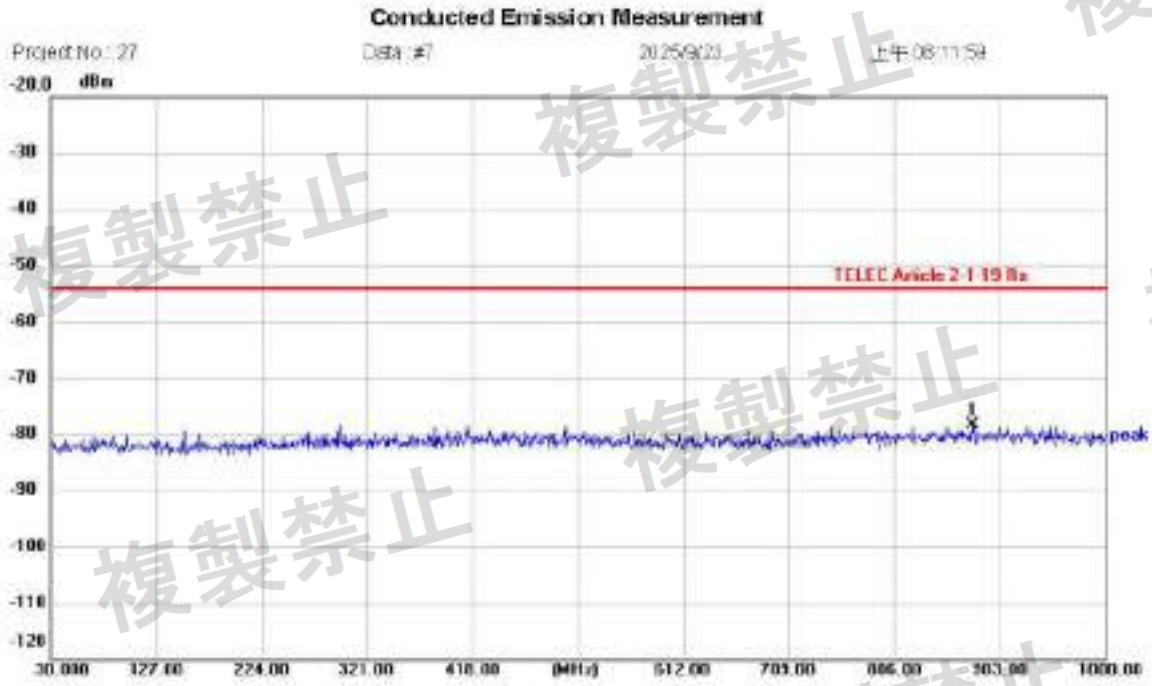


Site: Chamber 04
Limit: TELEC Article 2-1-19 Rx
EUT: W6M22508-24659
M/N:
Mode: Rx BLE 2M CH00
Note:

Polarization:
Power: 2.7 Vdc
Distance:

Temperature: 22.8(°C)
Humidity: 58 %RH

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	877.7800	-88.61	10.13	-78.48	-54.00	-24.48	peak			P	

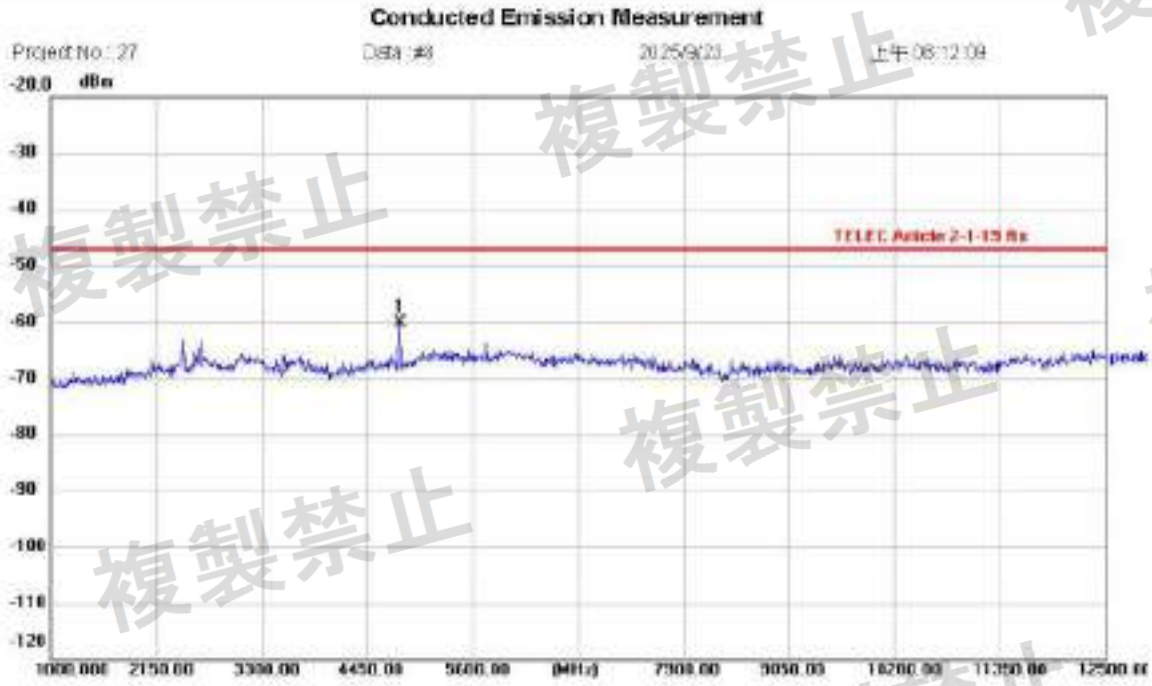


Site: Chamber 04
Limit: TELEC Article 2-1-19 Rx
EUT: W6M22508-24659
M/N:
Mode: Rx BLE 2M CH00
Note:

Polarization:
Power: 2.7 Vdc
Distance:

Temperature: 22.8(°C)
Humidity: 56 %RH

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	4806.500	-70.66	10.60	-60.06	-47.00	-13.06	peak			P	

Conducted Emission Measurement

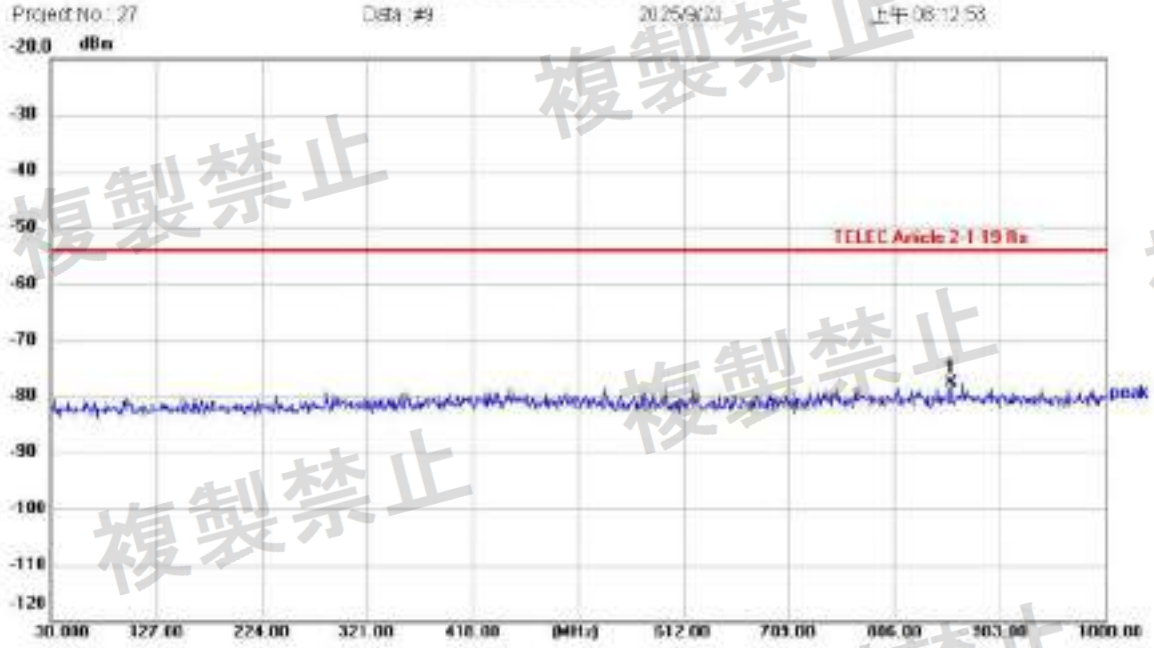


Site: Chamber 04
Limit: TELEC Article 2-1-19 Rx
EUT: W6M22508-24659
M/N:
Mode: Rx BLE 2M CH19
Note:

Polarization:
Power: 2.7 Vdc
Distance:

Temperature: 22.8(°C)
Humidity: 58 %RH

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	858.3800	-87.88	10.14	-77.74	-54.00	-23.74	peak			P	

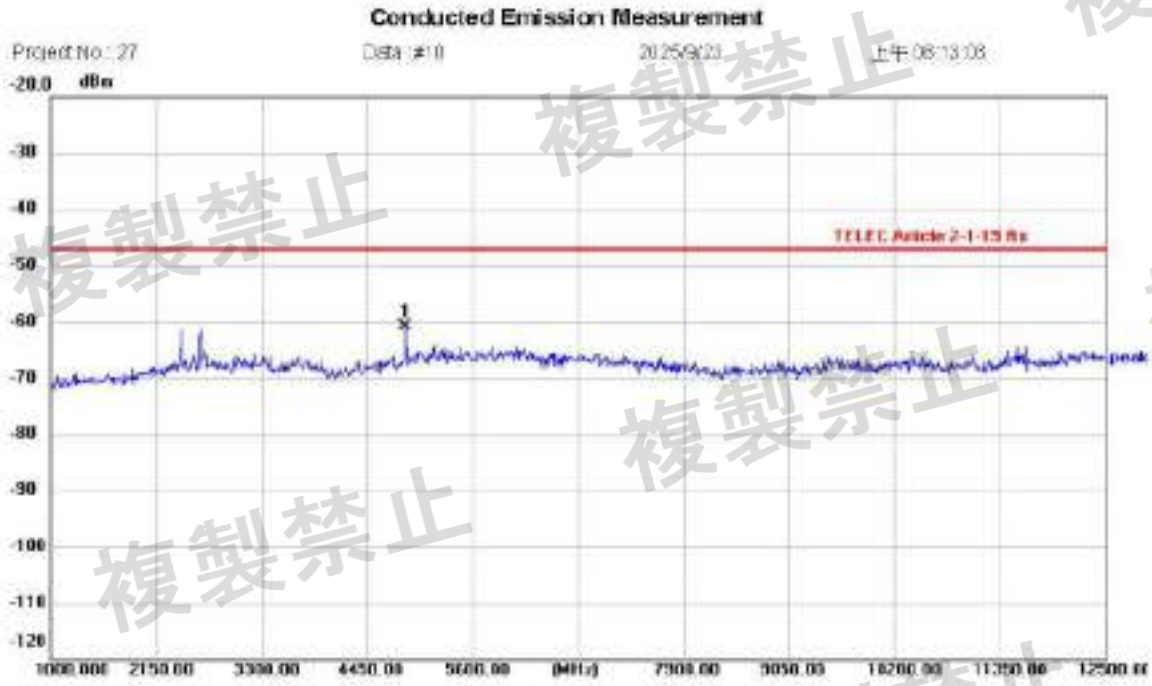


Site: Chamber 04
Limit: TELEC Article 2-1-19 Rx
EUT: W6M22508-24659
M/N:
Mode: Rx BLE 2M CH19
Note:

Polarization:
Power: 2.7 Vdc
Distance:

Temperature: 22.8(°C)
Humidity: 56 %RH

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	4875.500	-71.40	10.57	-60.83	-47.00	-13.83	peak			P	

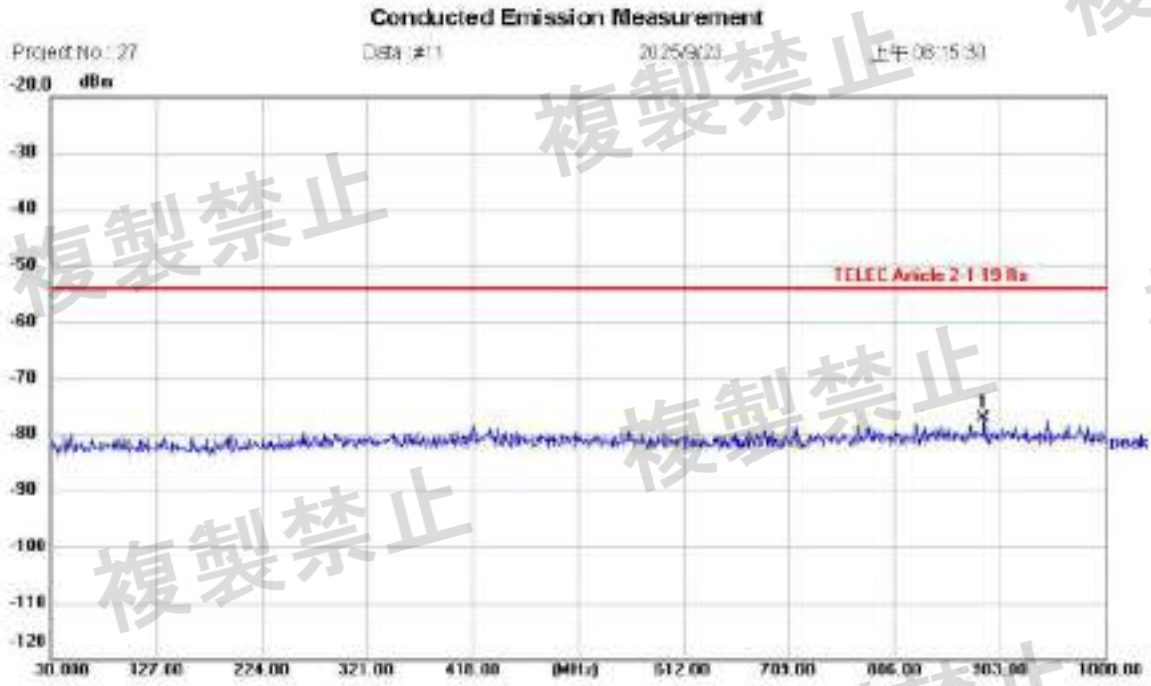


Site: Chamber 04
Limit: TELEC Article 2-1-19 Rx
EUT: W6M22508-24659
M/N:
Mode: Rx BLE 2M CH39
Note:

Polarization:
Power: 2.7 Vdc
Distance:

Temperature: 22.8(°C)
Humidity: 58 %RH

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	888.4500	-87.20	10.13	-77.07	-54.00	-23.07	peak			P	

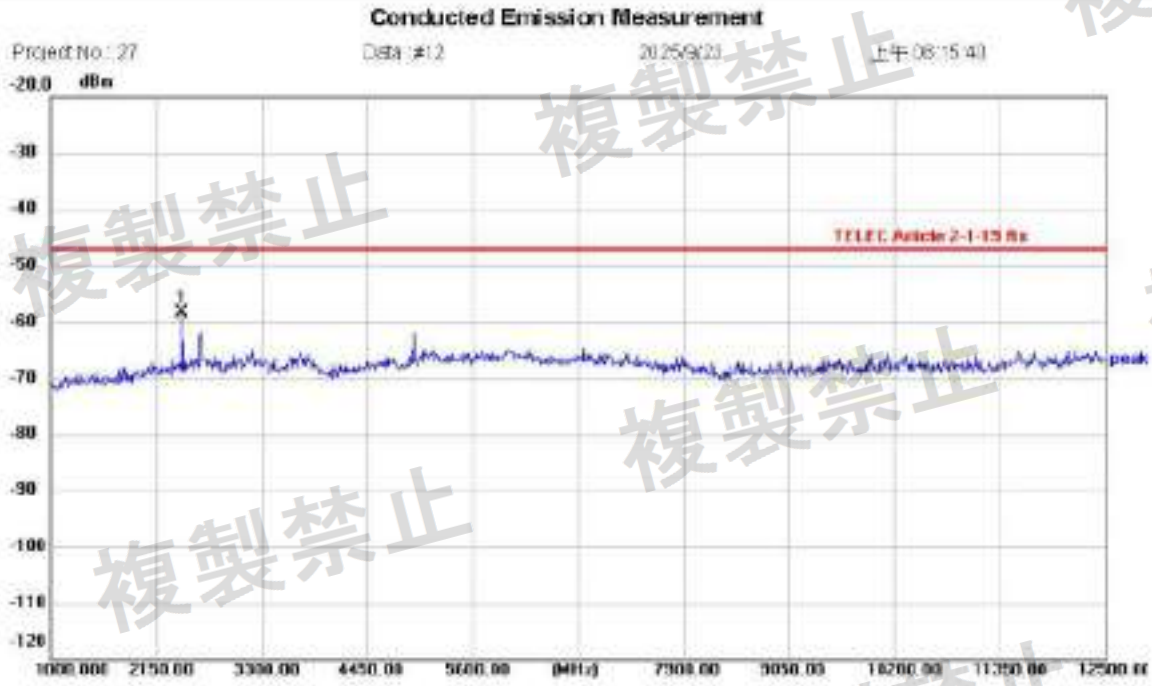


Site: Chamber 04
Limit: TELEC Article 2-1-19 Rx
EUT: W6M22508-24659
M/N:
Mode: Rx BLE 2M CH39
Note:

Polarization:
Power: 2.7 Vdc
Distance:

Temperature: 22.8(°C)
Humidity: 58 %RH

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	2437.500	-68.81	10.36	-58.45	-47.00	-11.45	peak			P	

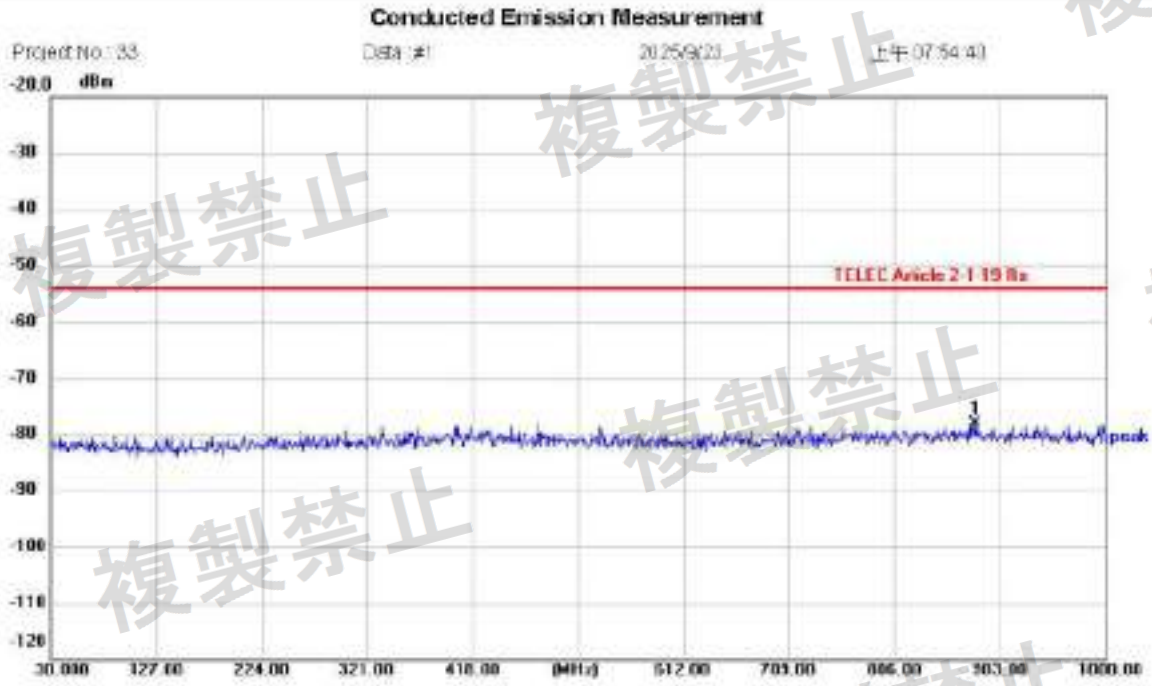


Site: Chamber 04
Limit: TELEC Article 2-1-19 Rx
EUT: W6M22508-24659
M/N:
Mode: Rx BLE 1M CH00
Note:

Polarization:
Power: 3.3 Vdc
Distance:

Temperature: 22.8(°C)
Humidity: 56 %RH

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	879.7200	-88.15	10.13	-78.02	-54.00	-24.02	peak			P	

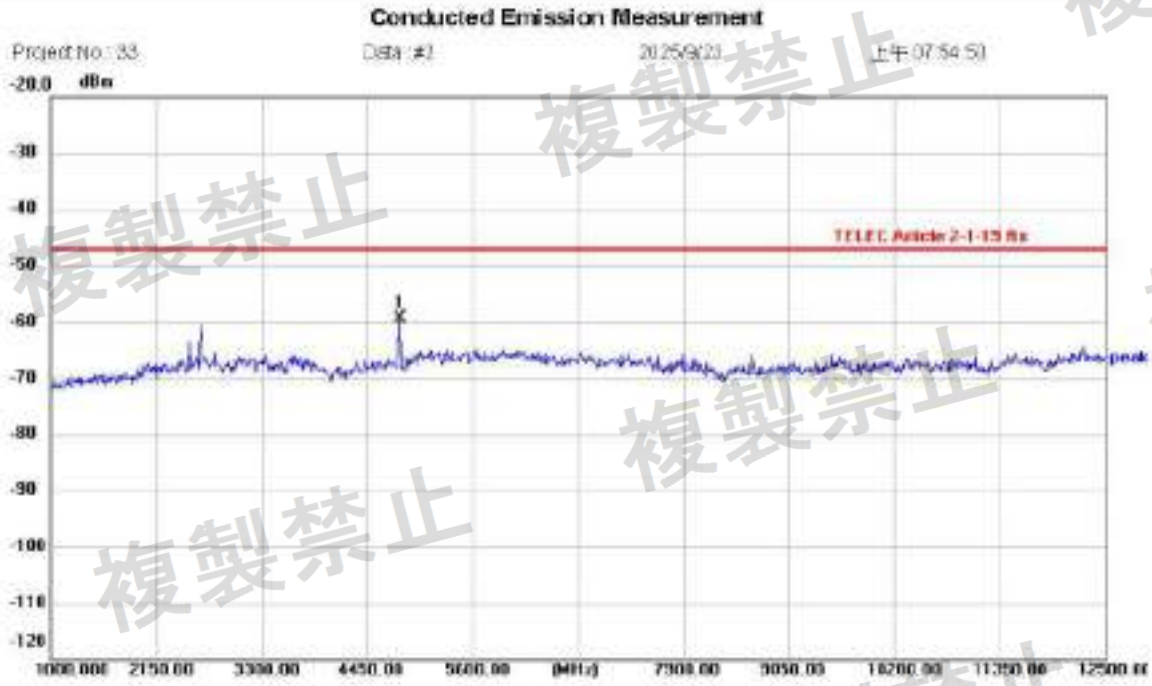


Site: Chamber 04
Limit: TELEC Article 2-1-19 Rx
EUT: W6M22508-24659
M/N:
Mode: Rx BLE 1M CH00
Note:

Polarization:
Power: 3.3 Vdc
Distance:

Temperature: 22.8(°C)
Humidity: 56 %RH

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	4806.500	-69.85	10.80	-59.25	-47.00	-12.25	peak			P	

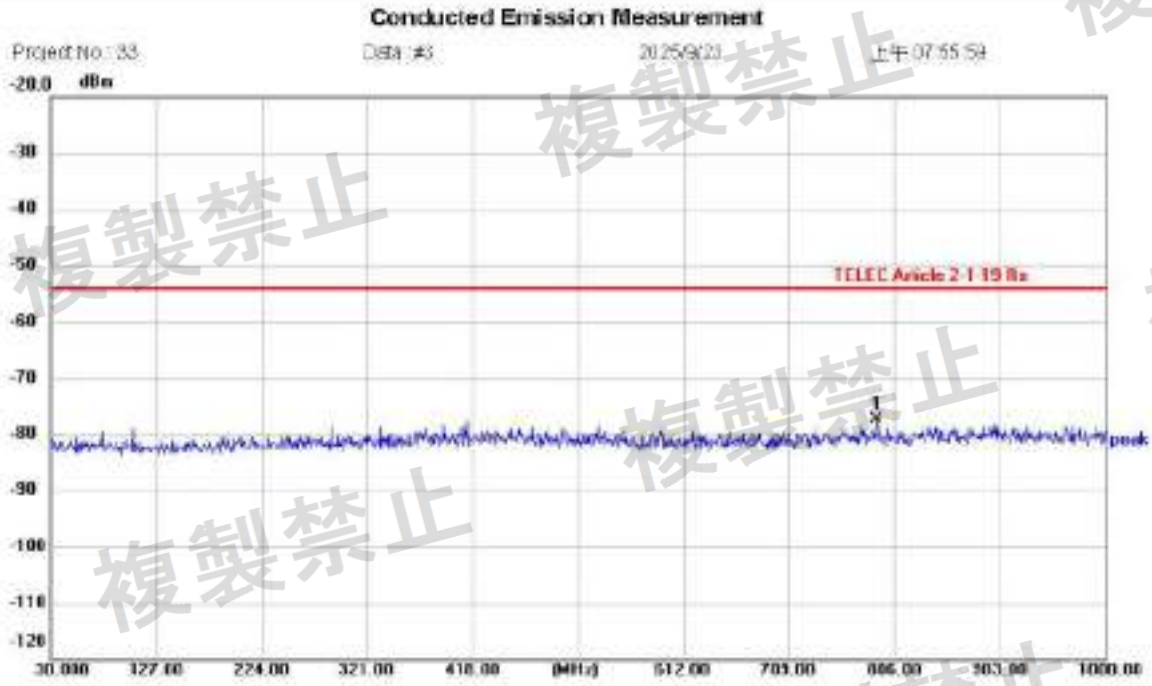


Site: Chamber 04
Limit: TELEC Article 2-1-19 Rx
EUT: W6M22508-24659
M/N:
Mode: Rx BLE 1M CH19
Note:

Polarization:
Power: 3.3 Vdc
Distance:

Temperature: 22.8(°C)
Humidity: 56 %RH

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	789.5100	-87.57	10.10	-77.47	-54.00	-23.47	peak			P	

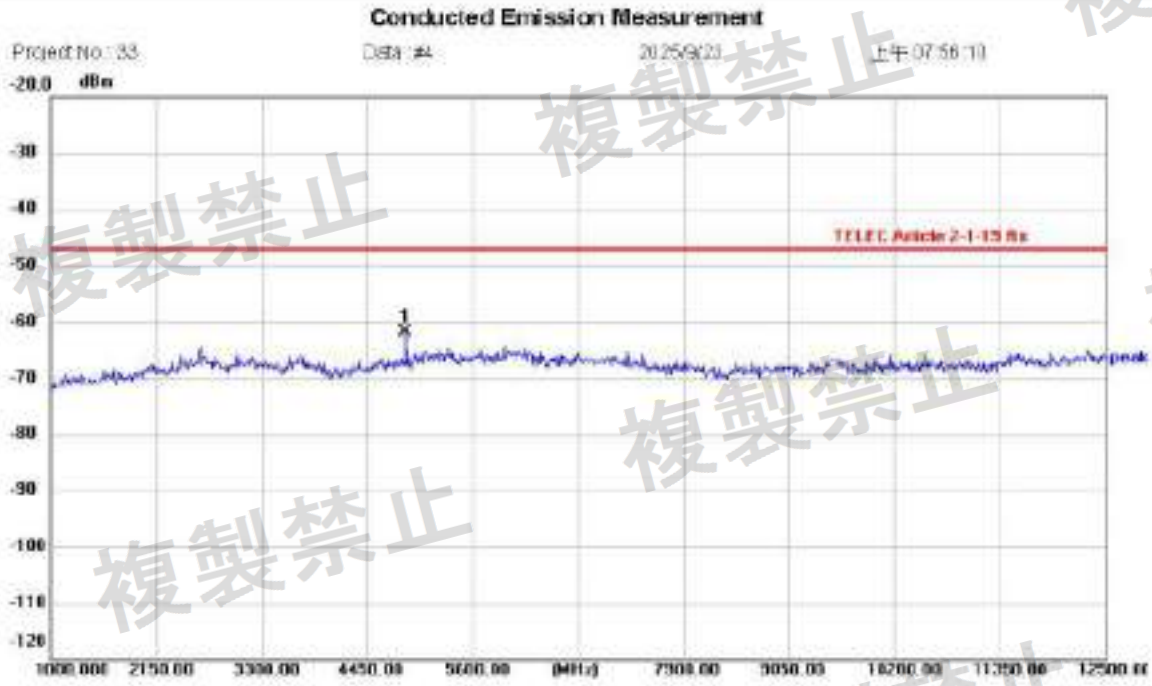


Site: Chamber 04
Limit: TELEC Article 2-1-19 Rx
EUT: W6M22508-24659
M/N:
Mode: Rx BLE 1M CH19
Note:

Polarization:
Power: 3.3 Vdc
Distance:

Temperature: 22.8(°C)
Humidity: 56 %RH

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	4875.500	-72.50	10.57	-61.93	-47.00	-14.93	peak			P	

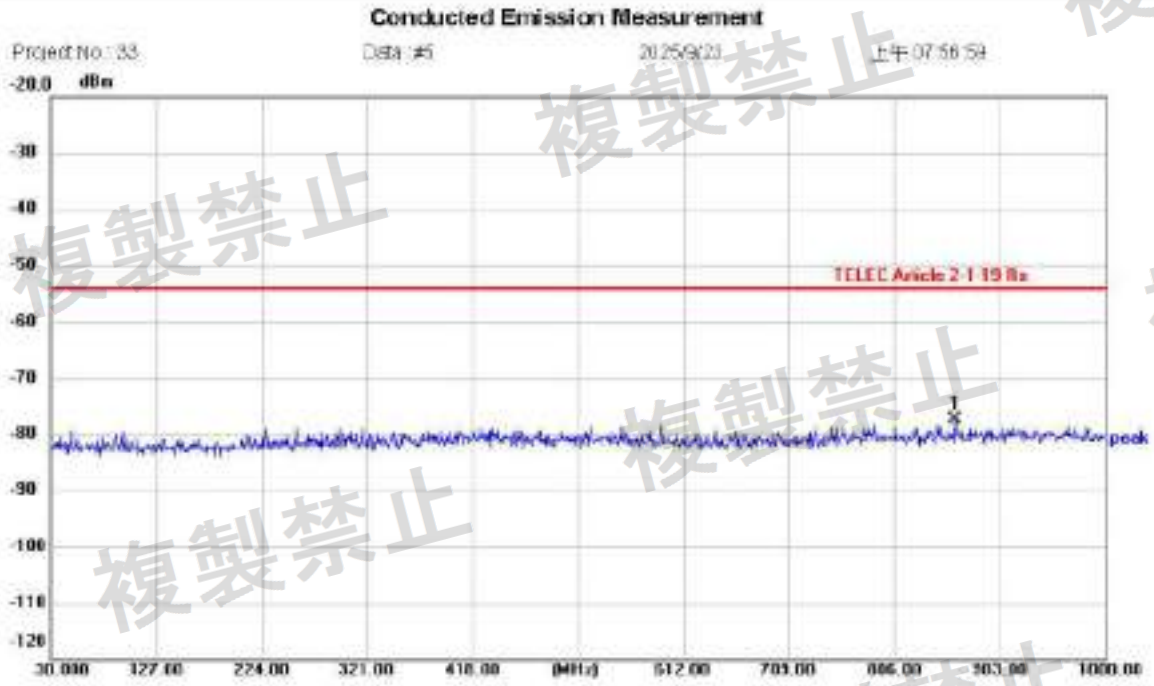


Site: Chamber 04
Limit: TELEC Article 2-1-19 Rx
EUT: W6M22508-24659
M/N:
Mode: Rx BLE 1M CH39
Note:

Polarization:
Power: 3.3 Vdc
Distance:

Temperature: 22.8(°C)
Humidity: 56 %RH

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	862.2600	-87.44	10.14	-77.30	-54.00	-23.30	peak			P	

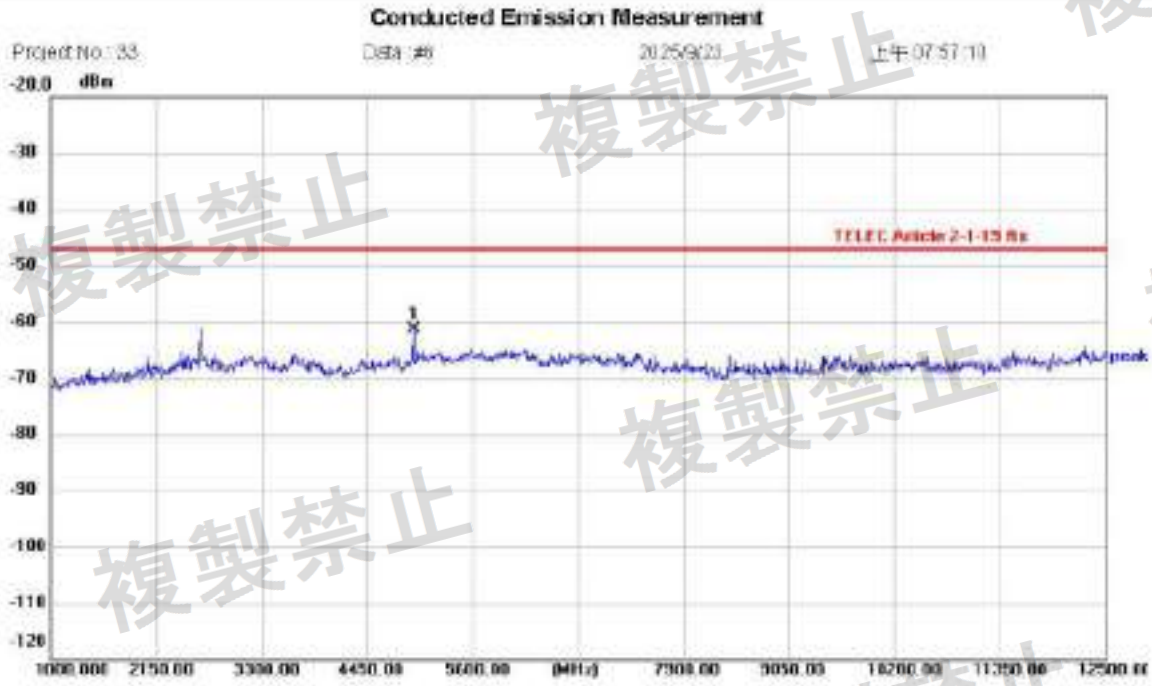


Site: Chamber 04
Limit: TELEC Article 2-1-19 Rx
EUT: W6M22508-24659
M/N:
Mode: Rx BLE 1M CH39
Note:

Polarization:
Power: 3.3 Vdc
Distance:

Temperature: 22.8(°C)
Humidity: 56 %RH

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	4956.000	-72.10	10.61	-61.49	-47.00	-14.49	peak			P	

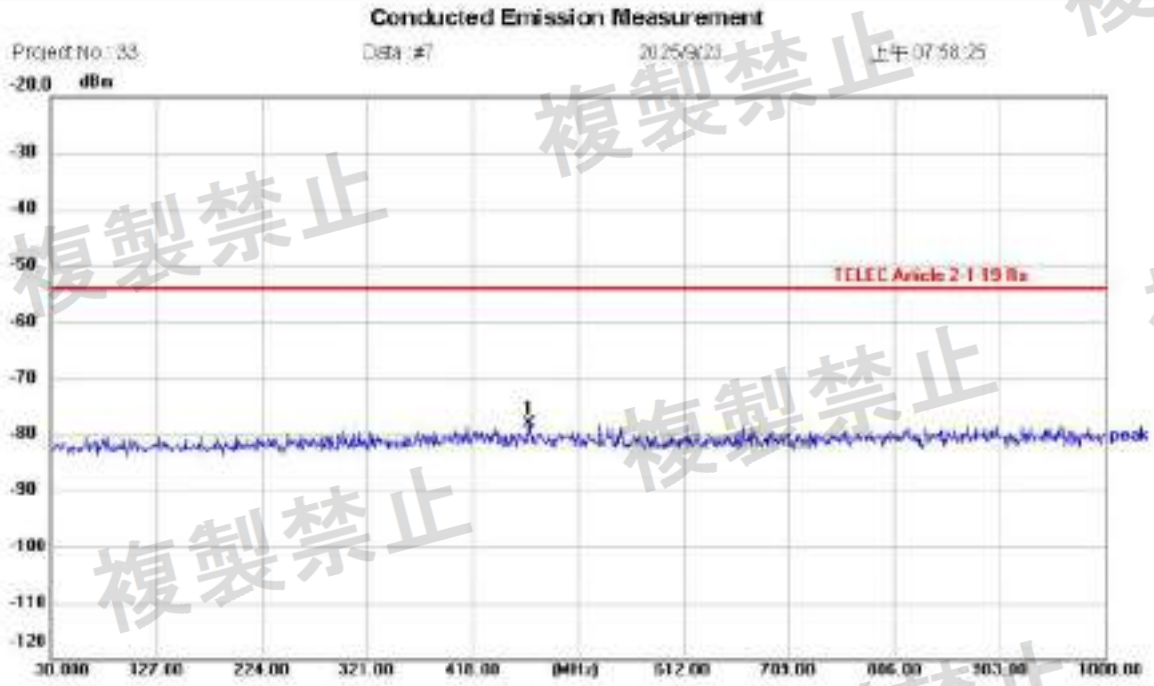


Site: Chamber 04
Limit: TELEC Article 2-1-19 Rx
EUT: W6M22508-24659
M/N:
Mode: Rx BLE 2M CH00
Note:

Polarization:
Power: 3.3 Vdc
Distance:

Temperature: 22.8(°C)
Humidity: 58 %RH

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	470.3800	-88.03	10.03	-78.00	-54.00	-24.00	peak			P	

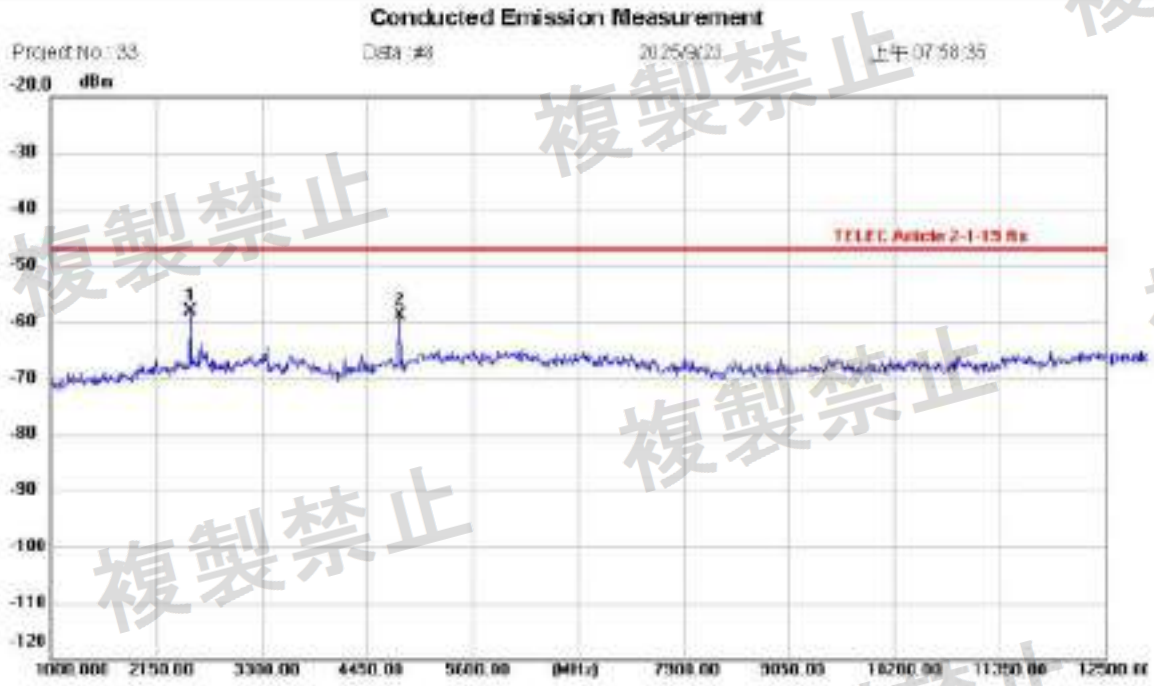


Site: Chamber 04
Limit: TELEC Article 2-1-19 Rx
EUT: W6M22508-24659
M/N:
Mode: Rx BLE 2M CH00
Note:

Polarization:
Power: 3.3 Vdc
Distance:

Temperature: 22.8(°C)
Humidity: 58 %RH

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	2518.000	-68.38	10.36	-58.02	-47.00	-11.02	peak			P	
2	4806.500	-69.58	10.60	-58.98	-47.00	-11.98	peak			P	

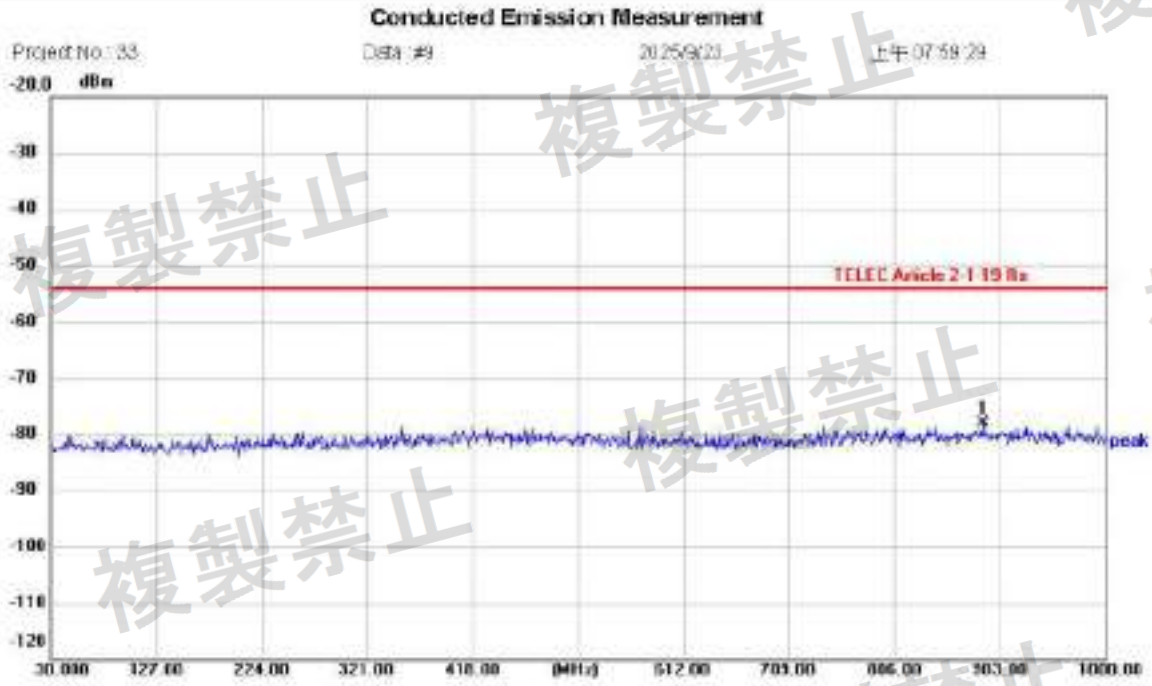


Site: Chamber 04
Limit: TELEC Article 2-1-19 Rx
EUT: W6M22508-24659
M/N:
Mode: Rx BLE 2M CH19
Note:

Polarization:
Power: 3.3 Vdc
Distance:

Temperature: 22.8(°C)
Humidity: 58 %RH

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	887.4800	-88.25	10.13	-78.12	-54.00	-24.12	peak			P	

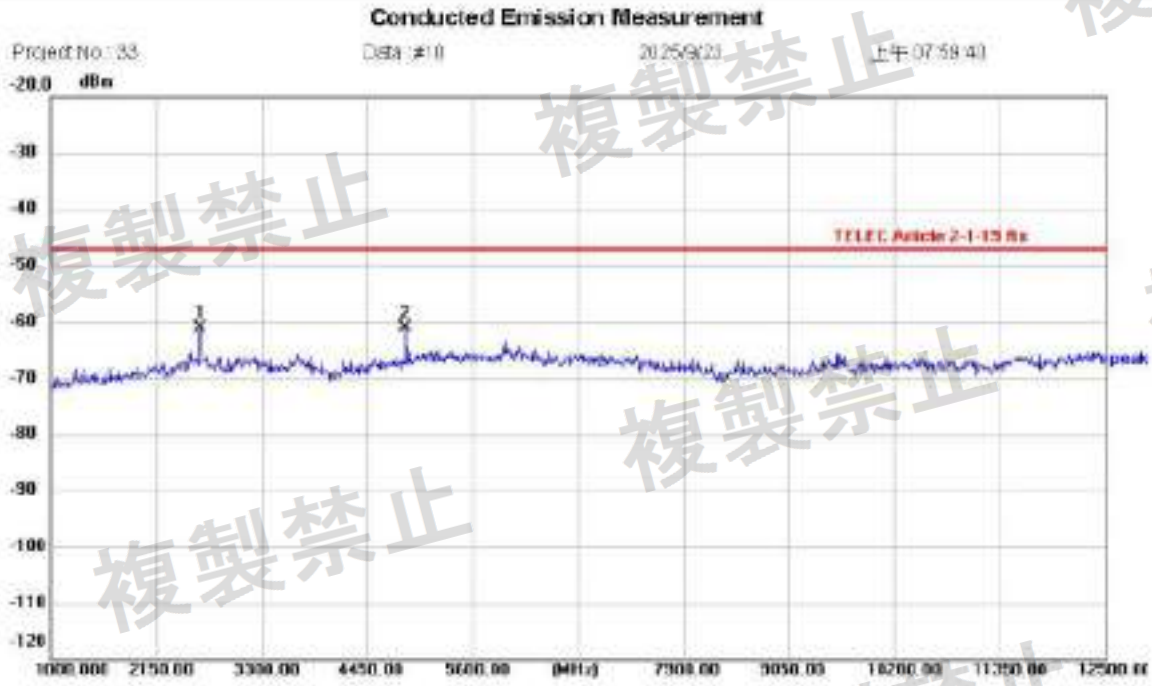


Site: Chamber 04
Limit: TELEC Article 2-1-19 Rx
EUT: W6M22508-24659
M/N:
Mode: Rx BLE 2M CH19
Note:

Polarization:
Power: 3.3 Vdc
Distance:

Temperature: 22.8(°C)
Humidity: 56 %RH

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	2633.000	-71.49	10.40	-61.09	-47.00	-14.09	peak			P	
2	4875.500	-71.78	10.57	-61.21	-47.00	-14.21	peak			P	

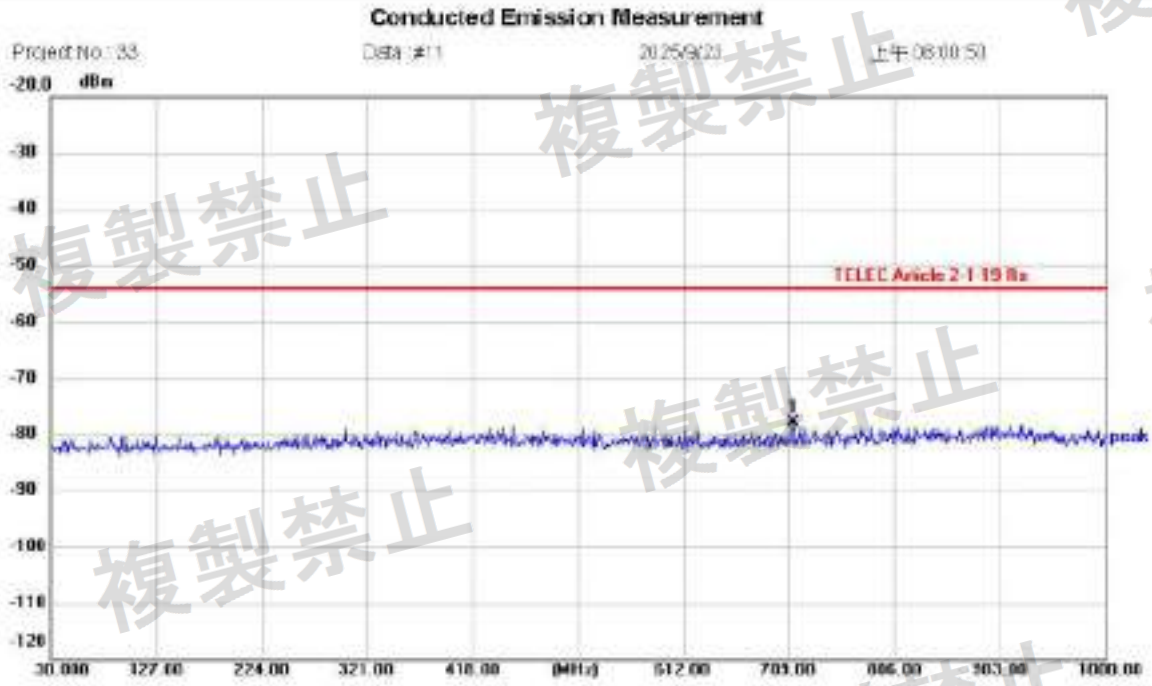


Site: Chamber 04
Limit: TELEC Article 2-1-19 Rx
EUT: W6M22508-24659
M/N:
Mode: Rx BLE 2M CH39
Note:

Polarization:
Power: 3.3 Vdc
Distance:

Temperature: 22.8(°C)
Humidity: 58 %RH

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	712.9800	-87.95	10.11	-77.84	-54.00	-23.84	peak			P	

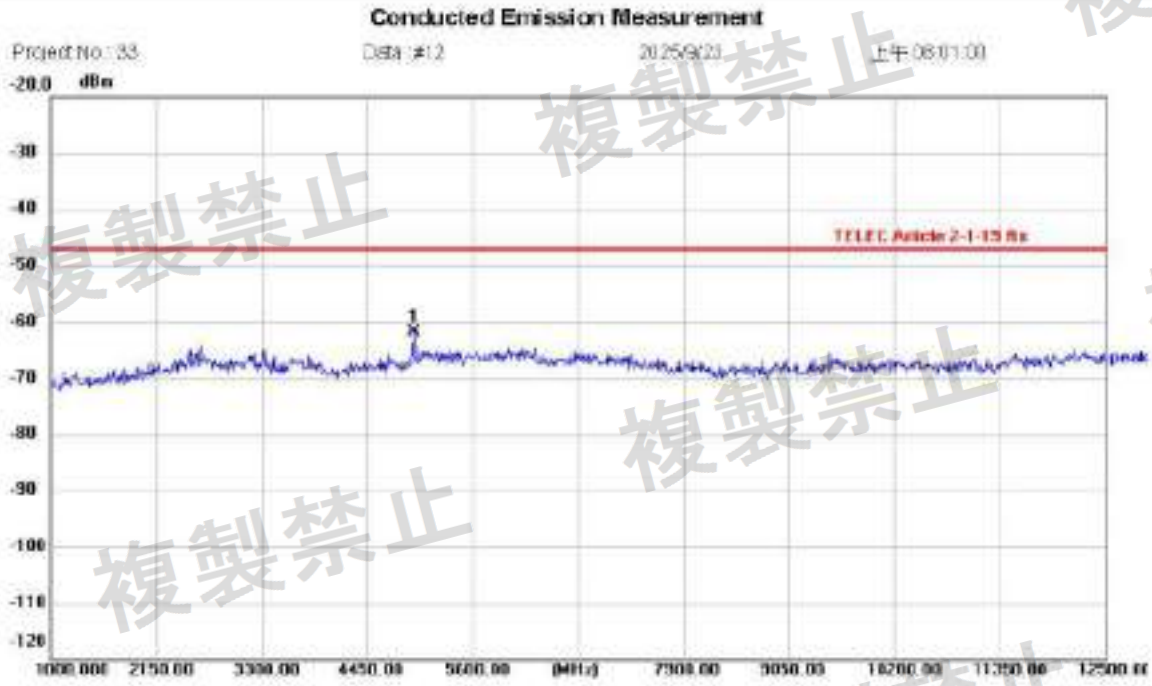


Site: Chamber 04
Limit: TELEC Article 2-1-19 Rx
EUT: W6M22508-24659
M/N:
Mode: Rx BLE 2M CH39
Note:

Polarization:
Power: 3.3 Vdc
Distance:

Temperature: 22.8(°C)
Humidity: 56 %RH

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	4956.000	-72.58	10.61	-61.97	-47.00	-14.97	peak			P	

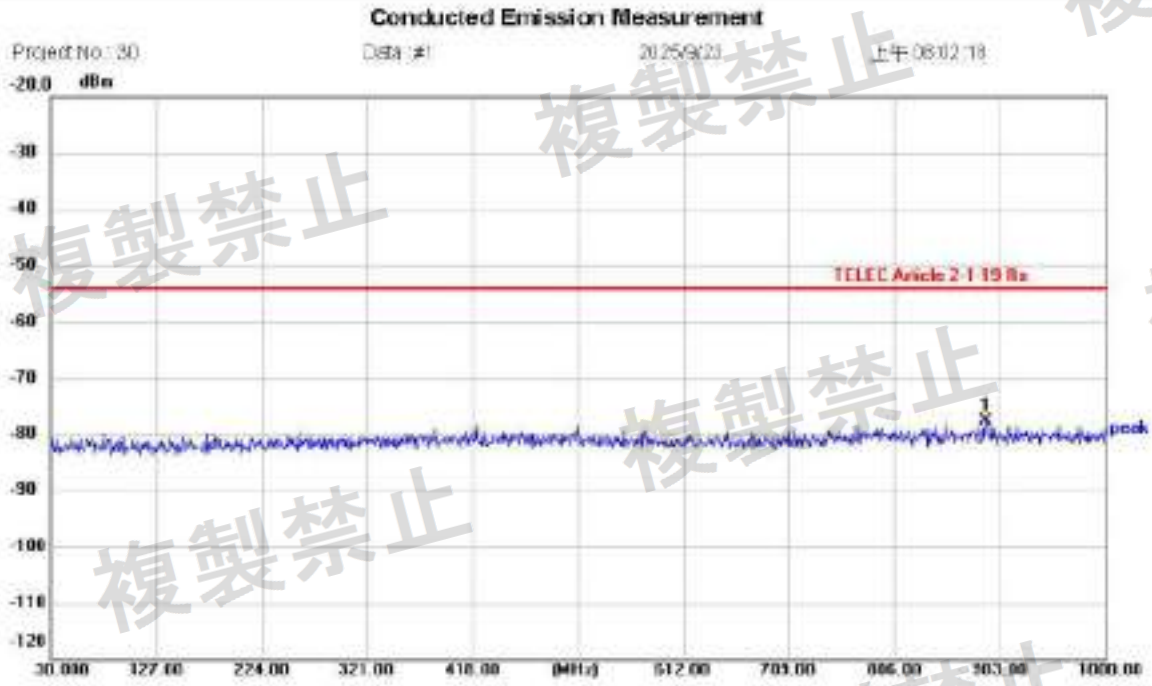


Site: Chamber 04
Limit: TELEC Article 2-1-19 Rx
EUT: W6M22508-24659
M/N:
Mode: Rx BLE 1M CH00
Note:

Polarization:
Power: 3 Vd.c
Distance:

Temperature: 22.8(°C)
Humidity: 58 %RH

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	890.3900	-87.83	10.13	-77.70	-54.00	-23.70	peak			P	

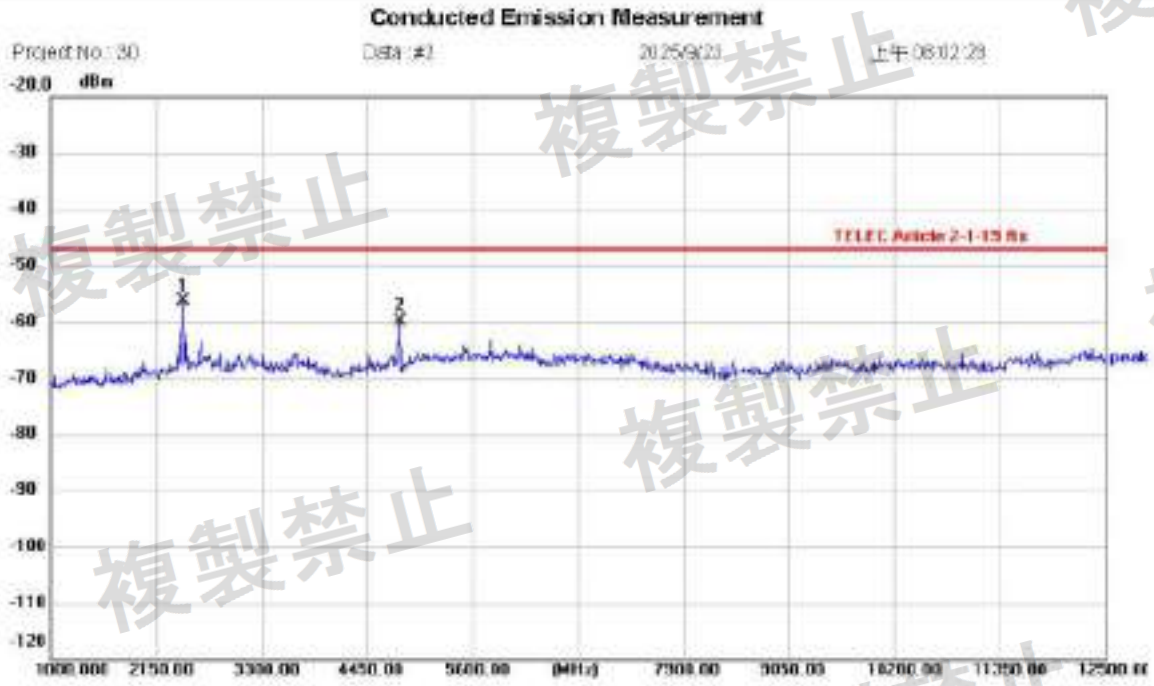


Site: Chamber 04
Limit: TELEC Article 2-1-19 Rx
EUT: W6M22508-24659
M/N:
Mode: Rx BLE 1M CH00
Note:

Polarization:
Power: 3 Vd.c
Distance:

Temperature: 22.8(°C)
Humidity: 58 %RH

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	2449.000	-66.82	10.36	-56.46	-47.00	-9.46	peak			P	
2	4806.500	-70.41	10.60	-59.81	-47.00	-12.81	peak			P	

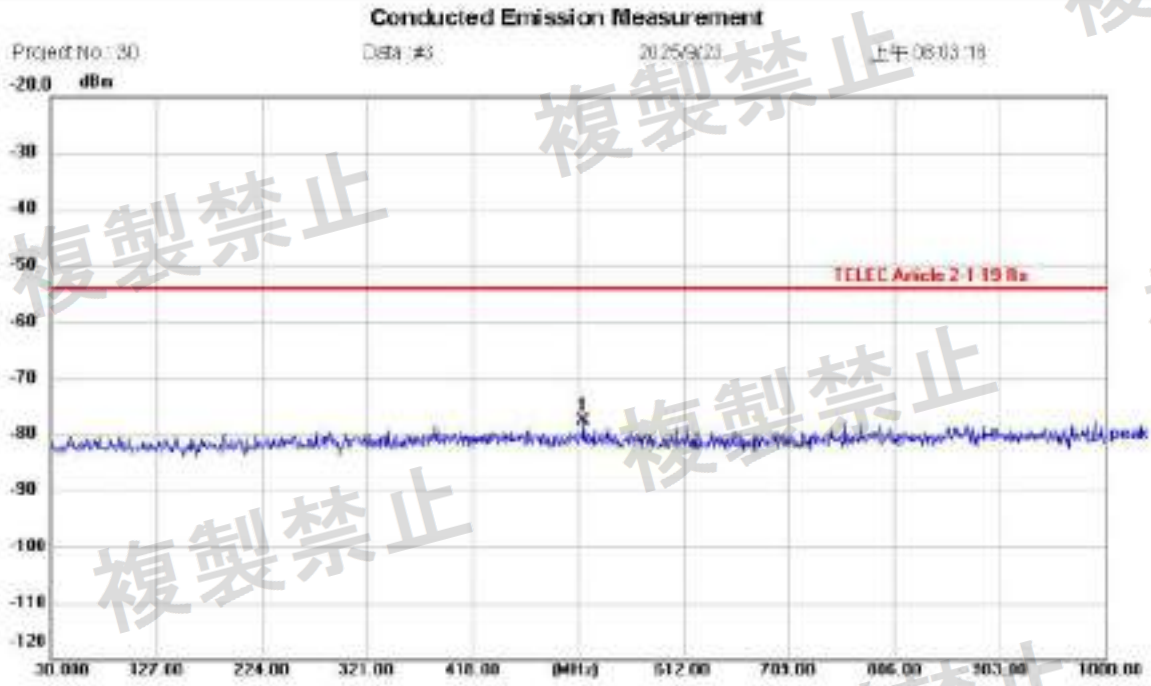


Site: Chamber 04
Limit: TELEC Article 2-1-19 Rx
EUT: W6M22508-24659
M/N:
Mode: Rx BLE 1M CH19
Note:

Polarization:
Power: 3 Vd.c
Distance:

Temperature: 22.8(°C)
Humidity: 58 %RH

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	519.8500	-87.64	10.03	-77.61	-54.00	-23.61	peak			P	

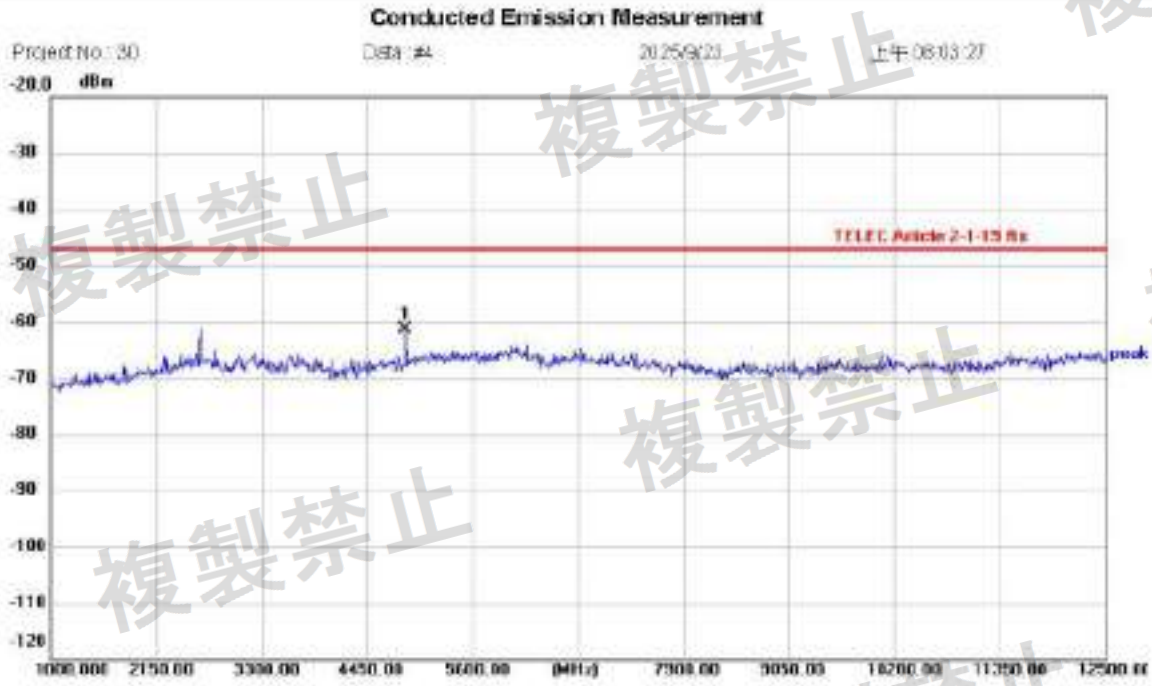


Site: Chamber 04
Limit: TELEC Article 2-1-19 Rx
EUT: W6M22508-24659
M/N:
Mode: Rx BLE 1M CH19
Note:

Polarization:
Power: 3 Vd.c
Distance:

Temperature: 22.8(°C)
Humidity: 58 %RH

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	4875.500	-71.83	10.57	-61.26	-47.00	-14.26	peak			P	

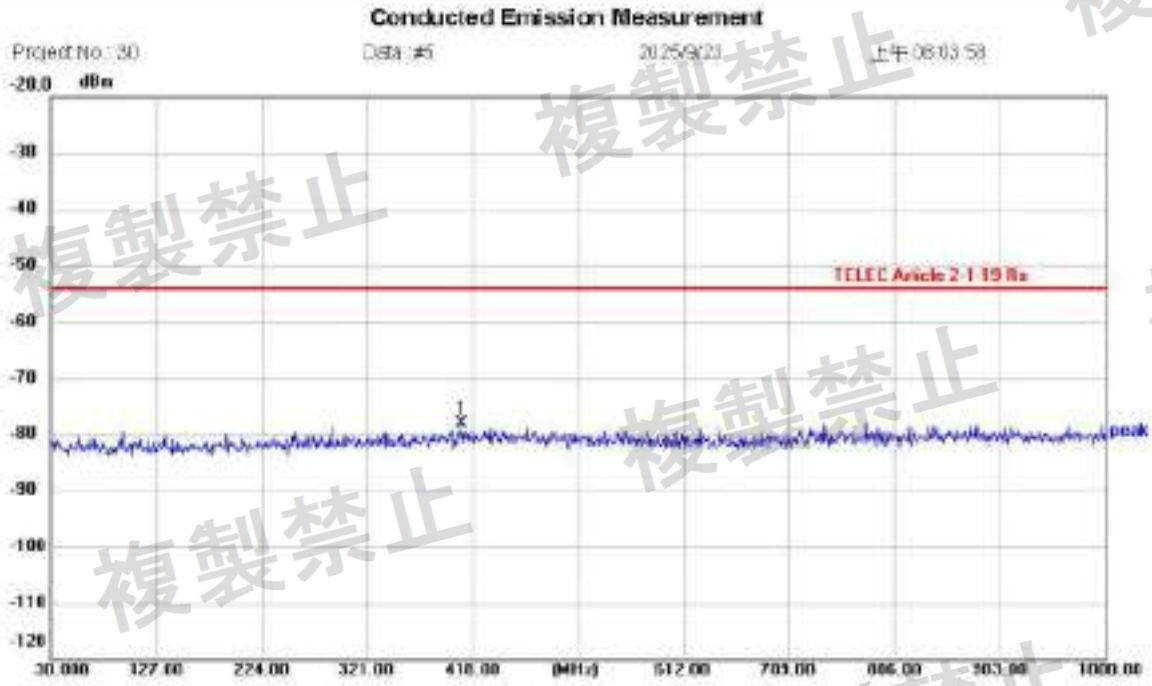


Site: Chamber 04
Limit: TELEC Article 2-1-19 Rx
EUT: W6M22508-24659
M/N:
Mode: Rx BLE 1M CH39
Note:

Polarization:
Power: 3 Vd.c
Distance:

Temperature: 22.8(°C)
Humidity: 58 %RH

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	408.3000	-88.23	10.01	-78.22	-54.00	-24.22	peak			P	

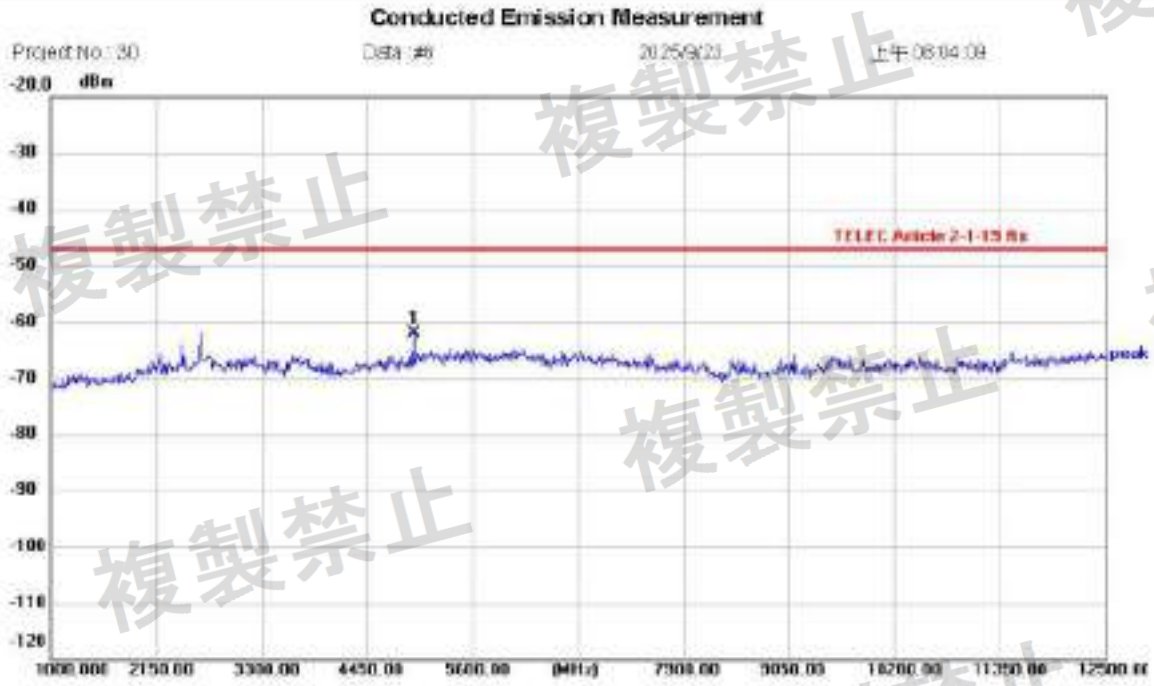


Site: Chamber 04
Limit: TELEC Article 2-1-19 Rx
EUT: W6M22508-24659
M/N:
Mode: Rx BLE 1M CH39
Note:

Polarization:
Power: 3 Vd.c
Distance:

Temperature: 22.8(°C)
Humidity: 56 %RH

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	4956.000	-72.84	10.61	-62.23	-47.00	-15.23	peak			P	

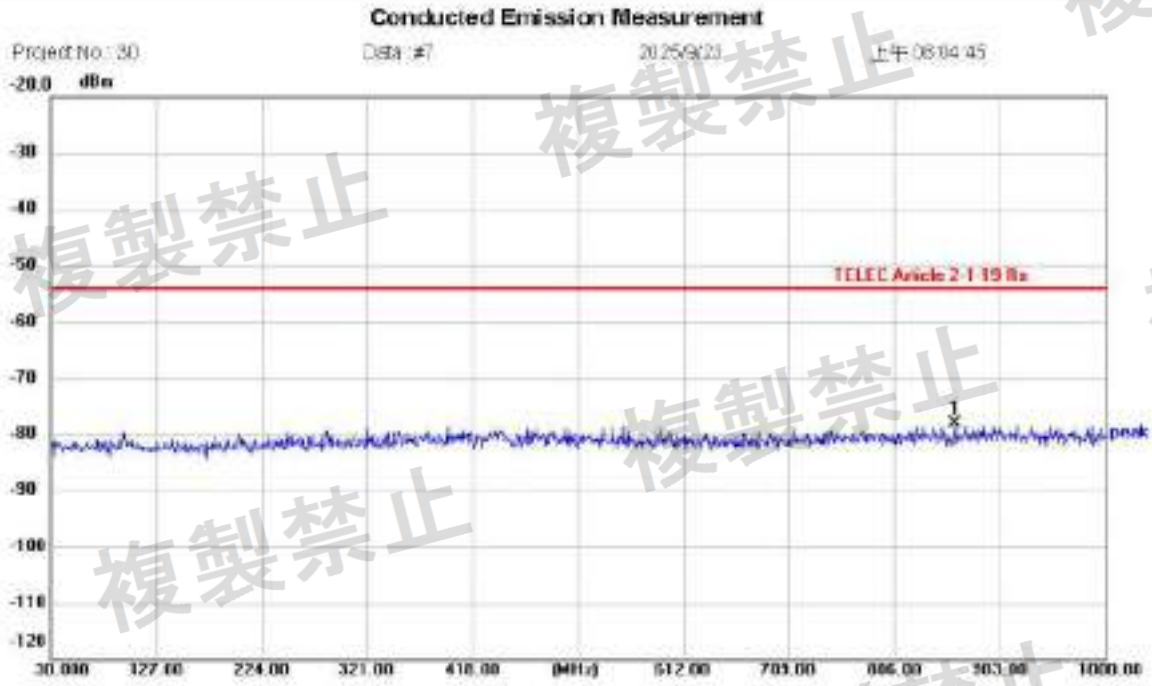


Site: Chamber 04
Limit: TELEC Article 2-1-19 Rx
EUT: W6M22508-24659
M/N:
Mode: Rx BLE 2M CH00
Note:

Polarization:
Power: 3 Vd.c
Distance:

Temperature: 22.8(°C)
Humidity: 58 %RH

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	862.2600	-88.32	10.14	-78.18	-54.00	-24.18	peak			P	

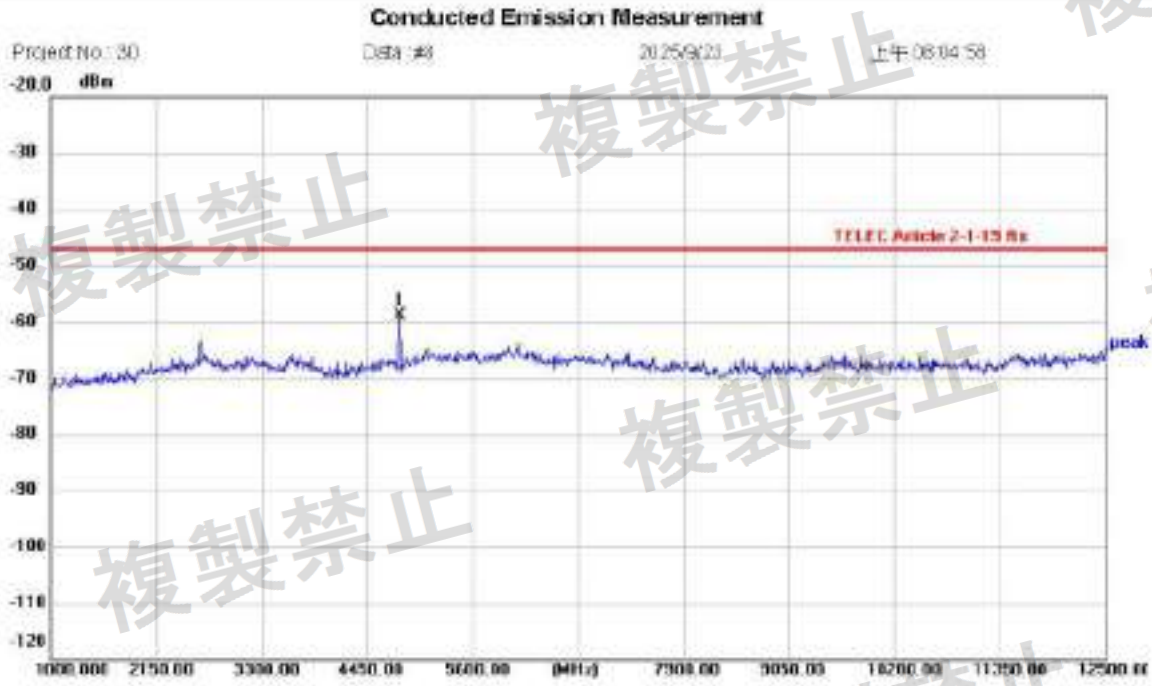


Site: Chamber 04
Limit: TELEC Article 2-1-19 Rx
EUT: W6M22508-24659
M/N:
Mode: Rx BLE 2M CH00
Note:

Polarization:
Power: 3 Vd.c
Distance:

Temperature: 22.8(°C)
Humidity: 58 %RH

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	4806.500	-69.53	10.60	-58.93	-47.00	-11.93	peak			P	

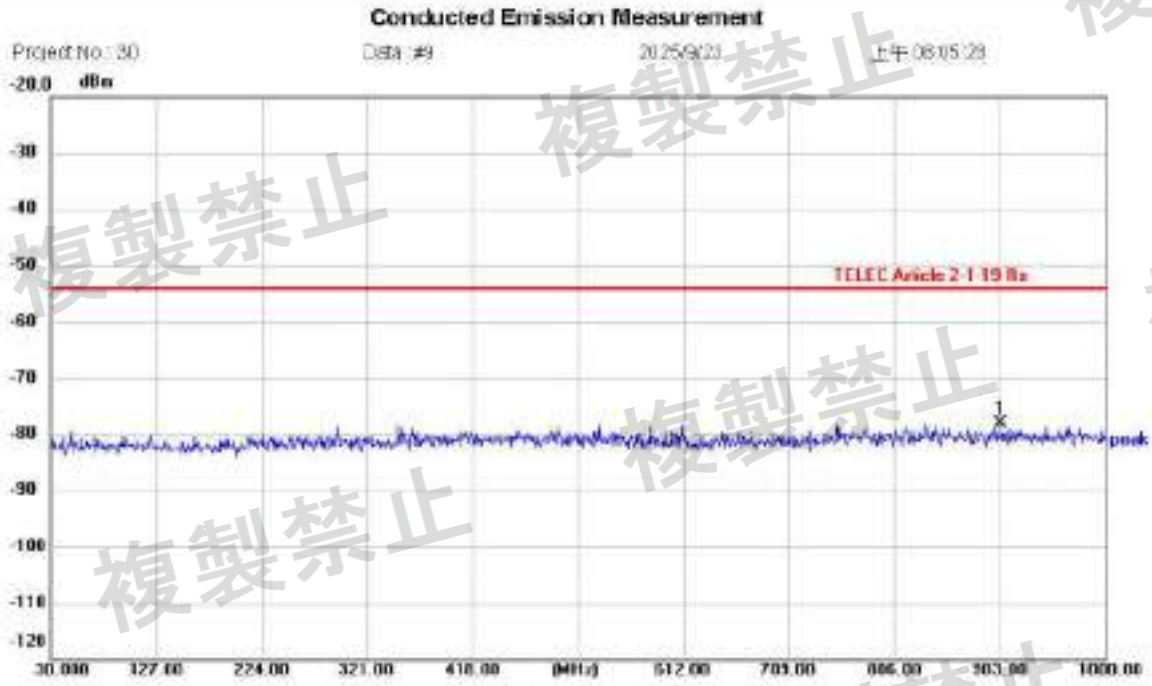


Site: Chamber 04
Limit: TELEC Article 2-1-19 Rx
EUT: W6M22508-24659
M/N:
Mode: Rx BLE 2M CH19
Note:

Polarization:
Power: 3 Vd.c
Distance:

Temperature: 22.8(°C)
Humidity: 58 %RH

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	903.9700	-88.16	10.13	-78.03	-54.00	-24.03	peak			P	

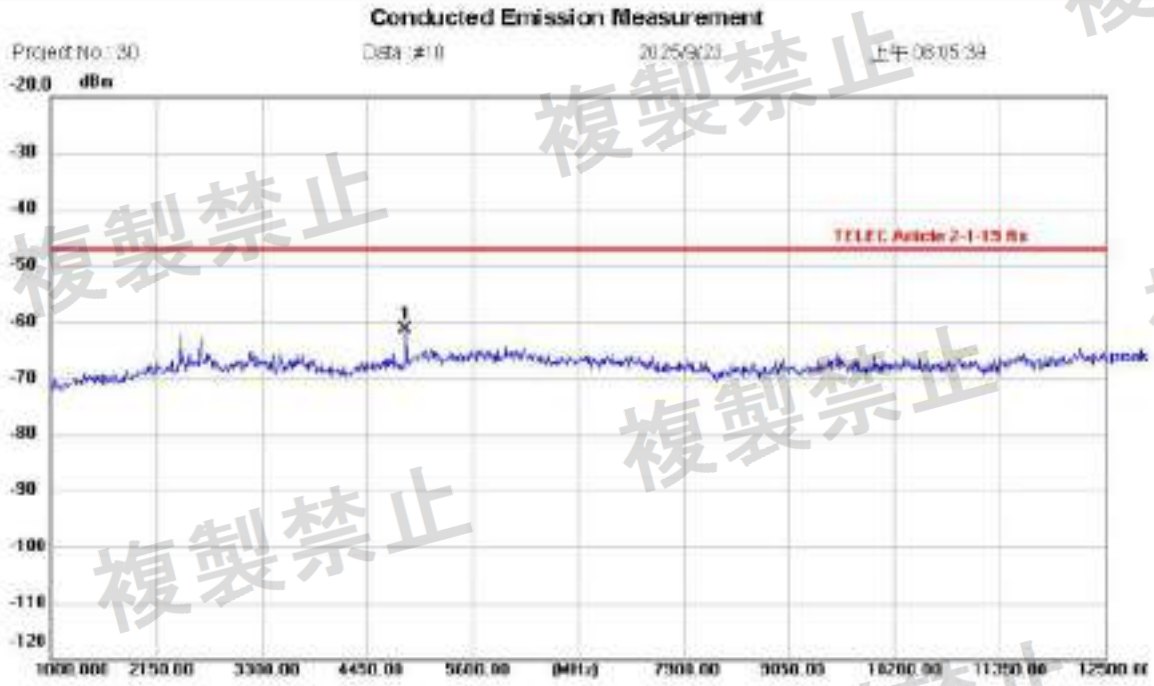


Site: Chamber 04
Limit: TELEC Article 2-1-19 Rx
EUT: W6M22508-24659
M/N:
Mode: Rx BLE 2M CH19
Note:

Polarization:
Power: 3 Vd.c
Distance:

Temperature: 22.8(°C)
Humidity: 58 %RH

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	4875.500	-71.90	10.57	-61.33	-47.00	-14.33	peak			P	

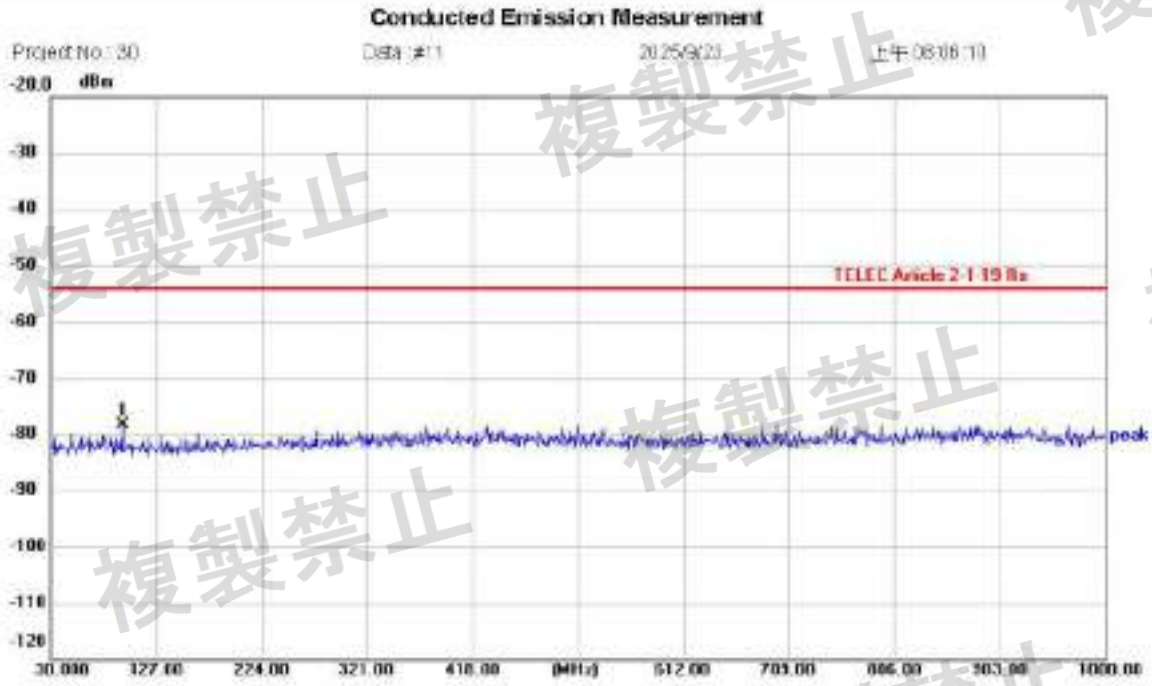


Site: Chamber 04
Limit: TELEC Article 2-1-19 Rx
EUT: W6M22508-24659
M/N:
Mode: Rx BLE 2M CH39
Note:

Polarization:
Power: 3 Vd.c
Distance:

Temperature: 22.8(°C)
Humidity: 58 %RH

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	95.9600	-88.18	9.88	-78.30	-54.00	-24.30	peak			P	

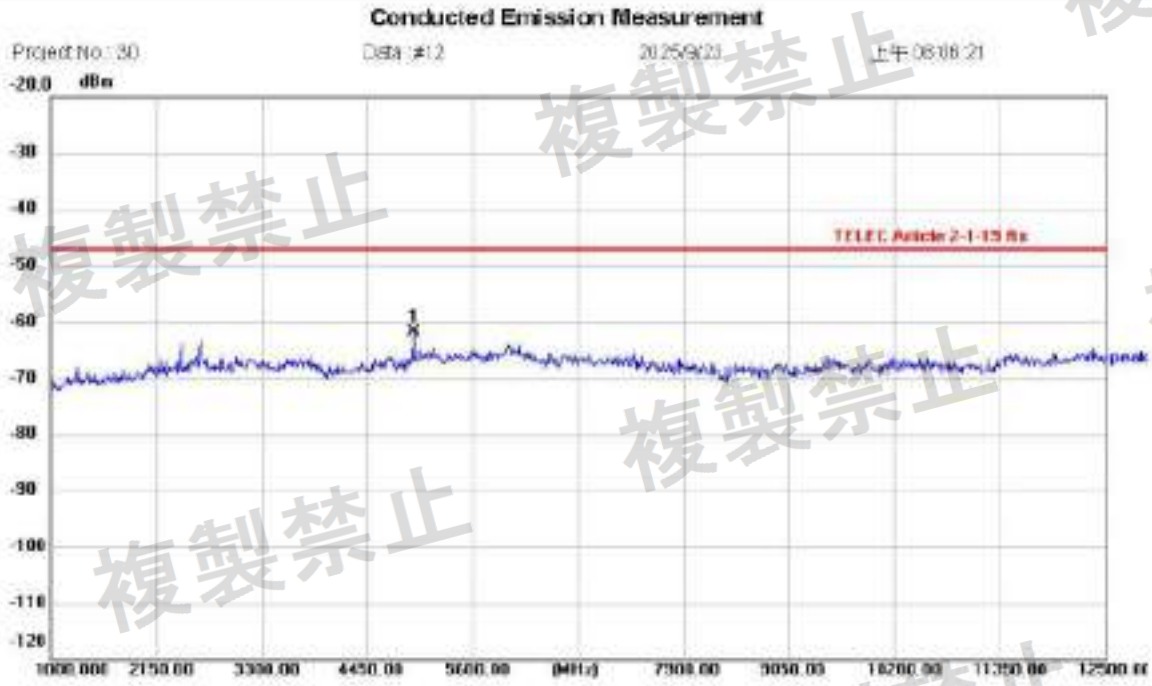


Site: Chamber 04
Limit: TELEC Article 2-1-19 Rx
EUT: W6M22508-24659
M/N:
Mode: Rx BLE 2M CH39
Note:

Polarization:
Power: 3 Vd.c
Distance:

Temperature: 22.8(°C)
Humidity: 56 %RH

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	4956.000	-72.41	10.61	-61.80	-47.00	-14.80	peak			P	

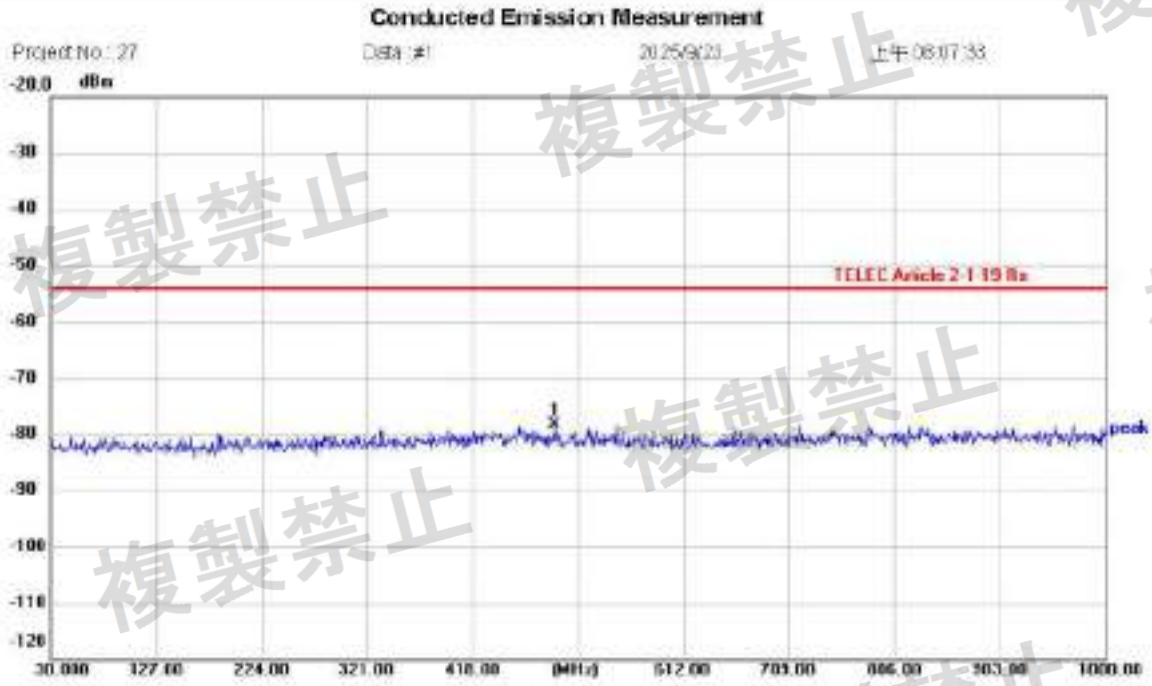


Site: Chamber 04
Limit: TELEC Article 2-1-19 Rx
EUT: W6M22508-24659
M/N:
Mode: Rx BLE 1M CH00
Note:

Polarization:
Power: 2.7 Vdc
Distance:

Temperature: 22.8(°C)
Humidity: 58 %RH

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	493.9600	-88.46	10.03	-78.43	-54.00	-24.43	peak			P	

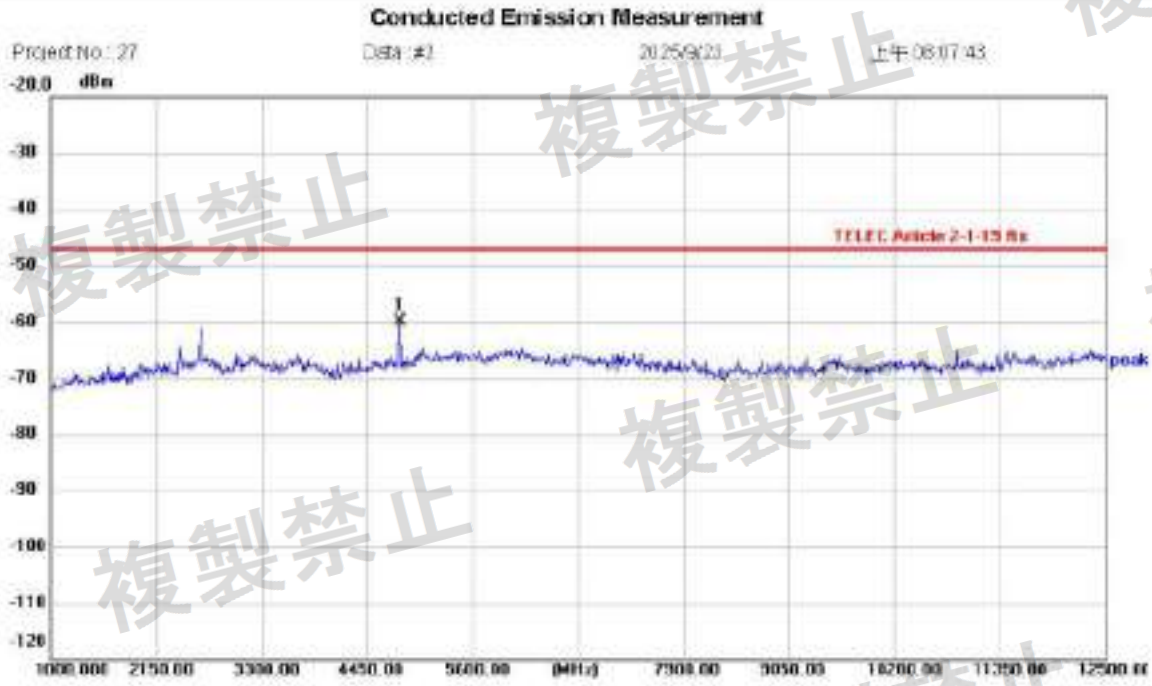


Site Chamber 04
Limit: TELEC Article 2-1-19 Rx
EUT: W6M22508-24659
M/N:
Mode: Rx BLE 1M CH00
Note:

Polarization:
Power: 2.7 Vdc
Distance:

Temperature: 22.8(°C)
Humidity: 56 %RH

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	4806.500	-70.48	10.80	-59.88	-47.00	-12.88	peak			P	

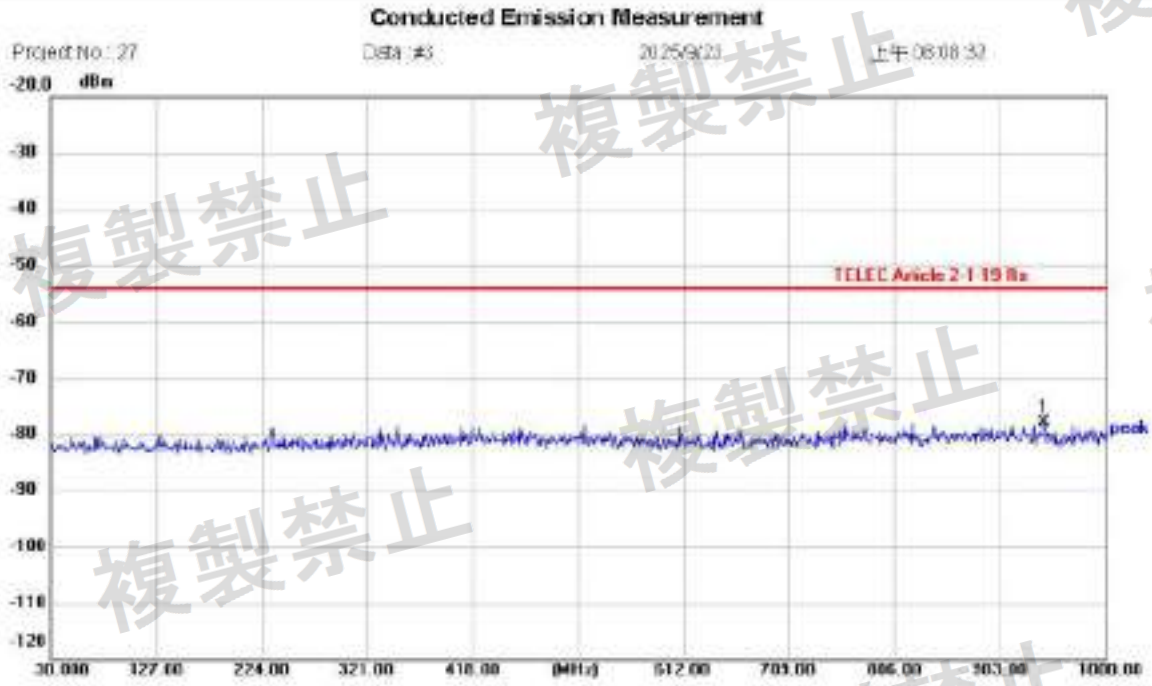


Site: Chamber 04
Limit: TELEC Article 2-1-19 Rx
EUT: W6M22508-24659
M/N:
Mode: Rx BLE 1M CH19
Note:

Polarization:
Power: 2.7 Vdc
Distance:

Temperature: 22.8(°C)
Humidity: 56 %RH

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	943.7400	-88.13	10.15	-77.98	-54.00	-23.98	peak			P	

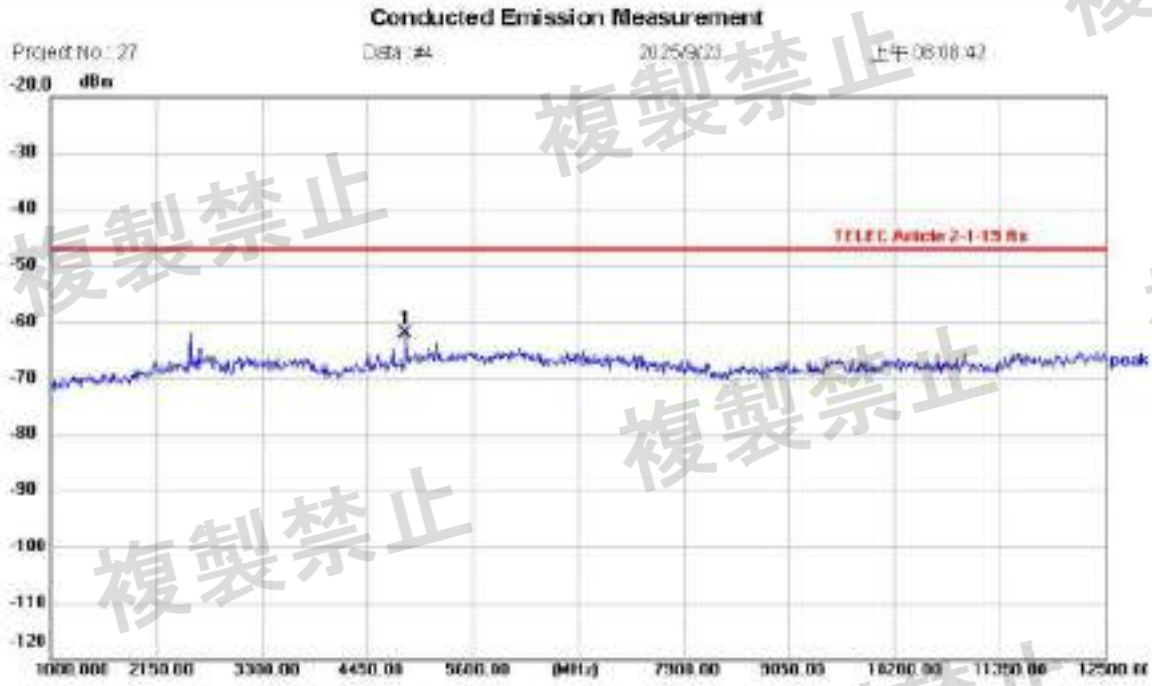


Site: Chamber 04
Limit: TELEC Article 2-1-19 Rx
EUT: W6M22508-24659
M/N:
Mode: Rx BLE 1M CH19
Note:

Polarization:
Power: 2.7 Vdc
Distance:

Temperature: 22.8(°C)
Humidity: 56 %RH

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	4875.500	-72.66	10.57	-62.09	-47.00	-15.09	peak			P	

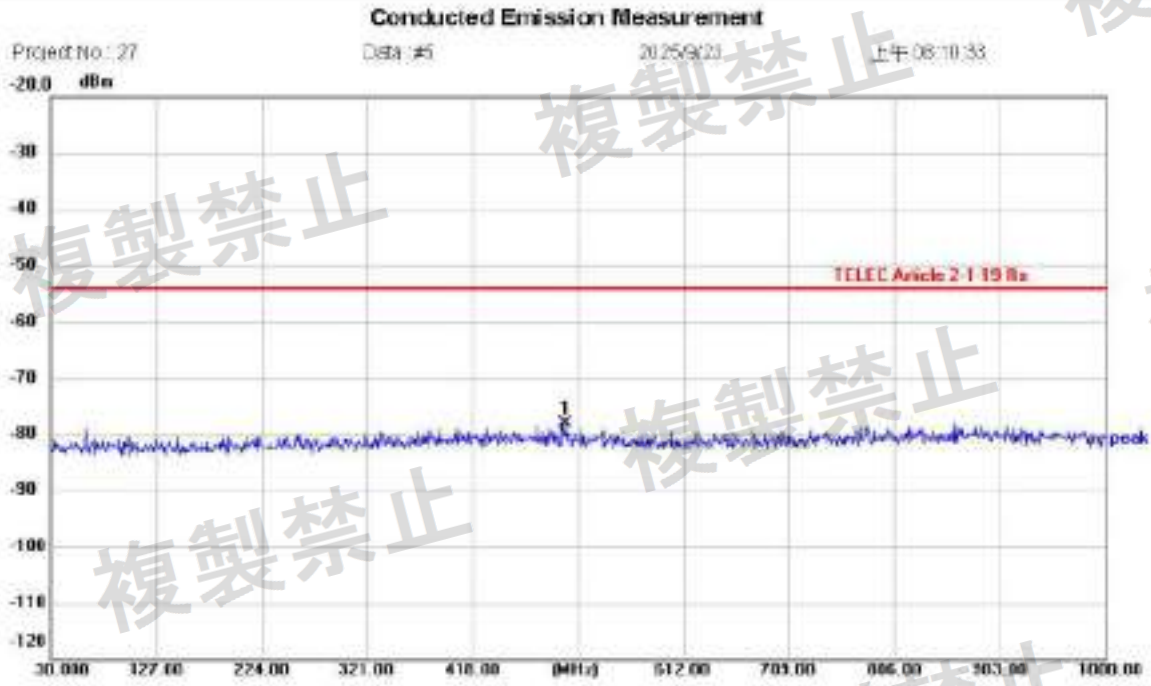


Site: Chamber 04
Limit: TELEC Article 2-1-19 Rx
EUT: W6M22508-24659
M/N:
Mode: Rx BLE 1M CH39
Note:

Polarization:
Power: 2.7 Vdc
Distance:

Temperature: 22.8(°C)
Humidity: 58 %RH

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	504.3300	-88.05	10.03	-78.02	-54.00	-24.02	peak			P	

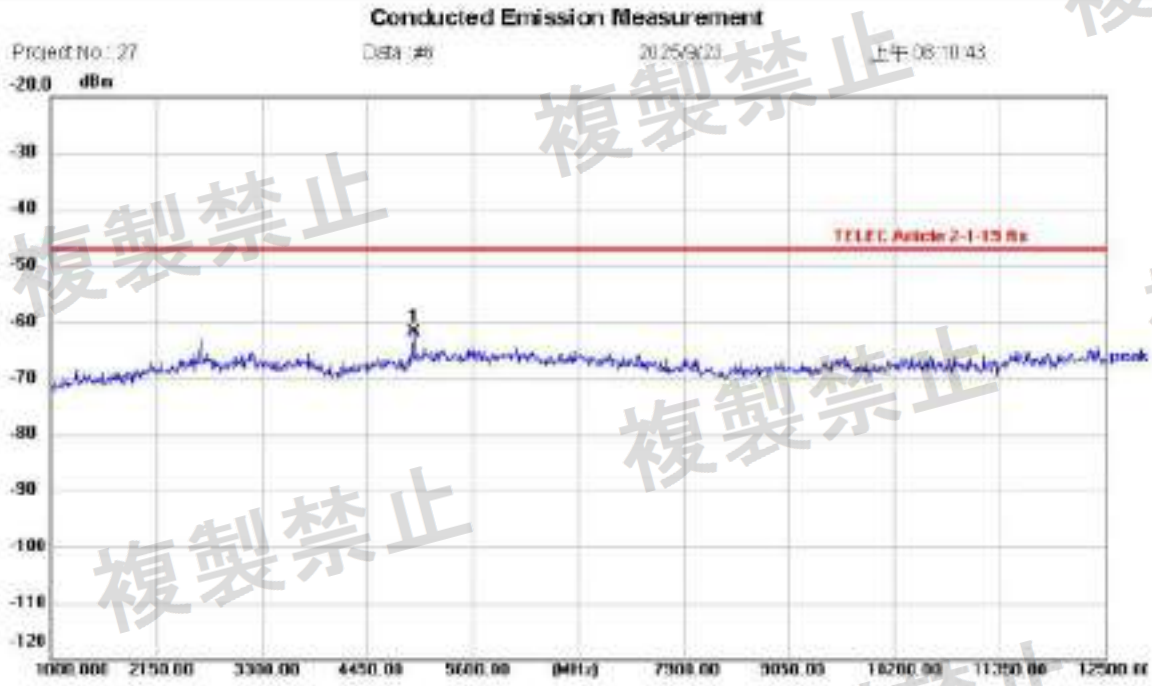


Site: Chamber 04
Limit: TELEC Article 2-1-19 Rx
EUT: W6M22508-24659
M/N:
Mode: Rx BLE 1M CH39
Note:

Polarization:
Power: 2.7 Vdc
Distance:

Temperature: 22.8(°C)
Humidity: 56 %RH

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	4956.000	-72.38	10.61	-61.77	-47.00	-14.77	peak			P	

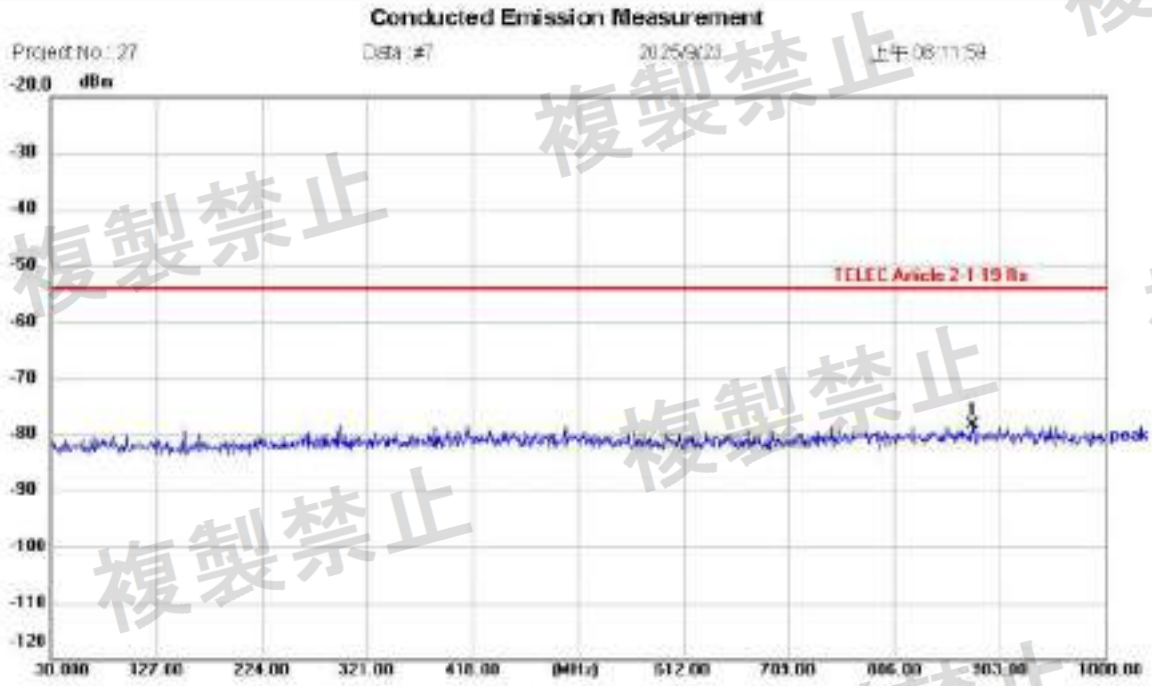


Site: Chamber 04
Limit: TELEC Article 2-1-19 Rx
EUT: W6M22508-24659
M/N:
Mode: Rx BLE 2M CH00
Note:

Polarization:
Power: 2.7 Vdc
Distance:

Temperature: 22.8(°C)
Humidity: 58 %RH

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	877.7800	-88.61	10.13	-78.48	-54.00	-24.48	peak			P	

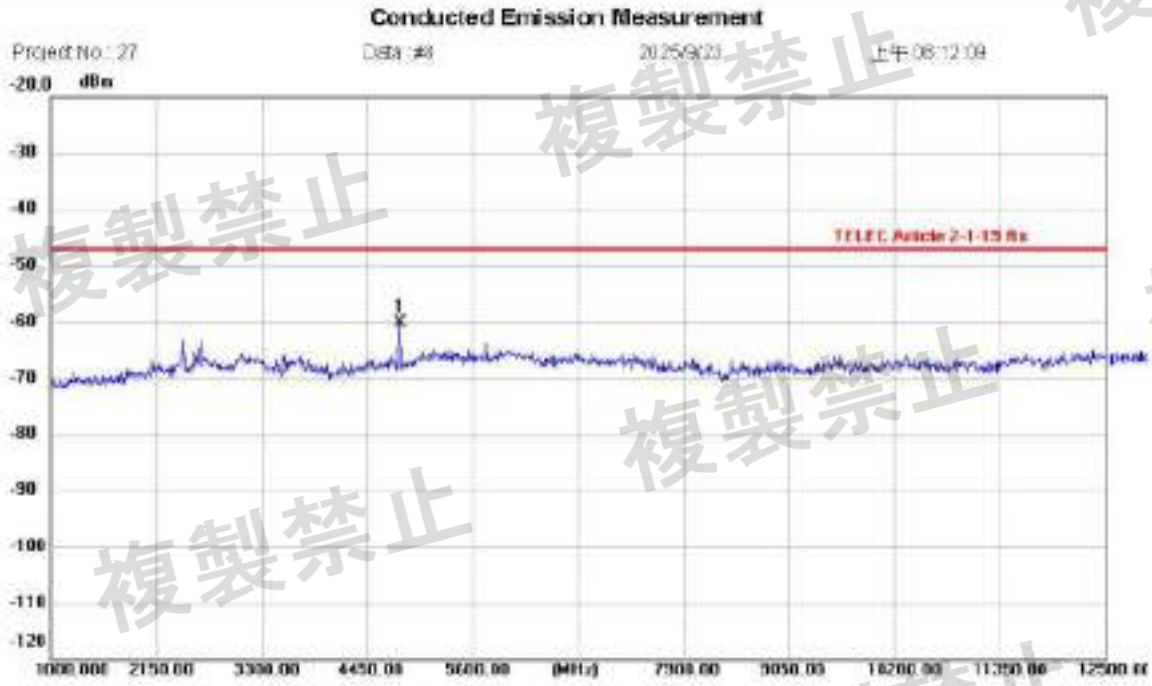


Site: Chamber 04
Limit: TELEC Article 2-1-19 Rx
EUT: W6M22508-24659
M/N:
Mode: Rx BLE 2M CH00
Note:

Polarization:
Power: 2.7 Vdc
Distance:

Temperature: 22.8(°C)
Humidity: 56 %RH

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	4806.500	-70.66	10.60	-60.06	-47.00	-13.06	peak			P	

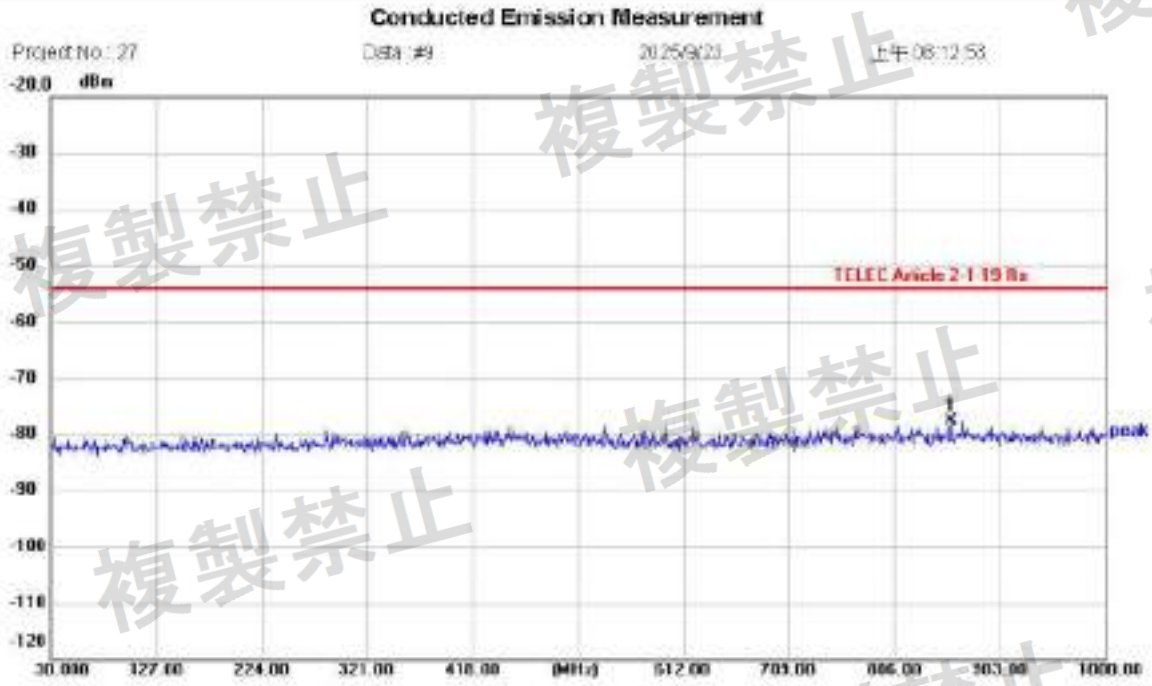


Site: Chamber 04
Limit: TELEC Article 2-1-19 Rx
EUT: W6M22508-24659
M/N:
Mode: Rx BLE 2M CH19
Note:

Polarization:
Power: 2.7 Vdc
Distance:

Temperature: 22.8(°C)
Humidity: 58 %RH

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	858.3800	-87.88	10.14	-77.74	-54.00	-23.74	peak			P	

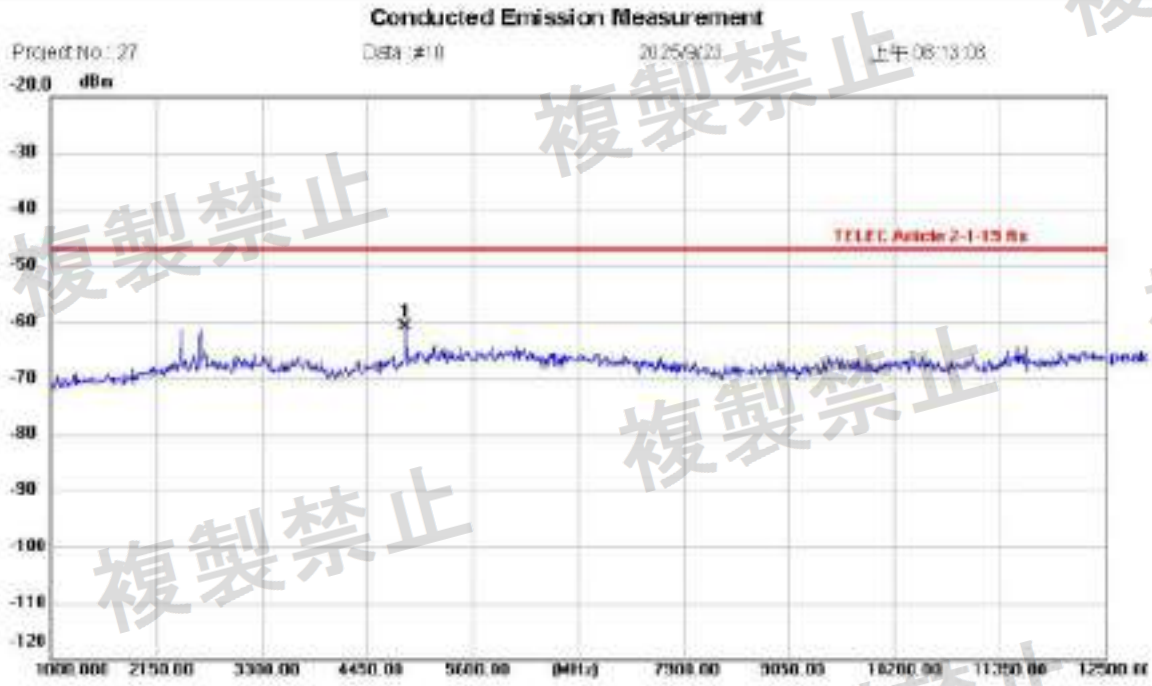


Site: Chamber 04
Limit: TELEC Article 2-1-19 Rx
EUT: W6M22508-24659
M/N:
Mode: Rx BLE 2M CH19
Note:

Polarization:
Power: 2.7 Vdc
Distance:

Temperature: 22.8(°C)
Humidity: 56 %RH

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	4875.500	-71.40	10.57	-60.83	-47.00	-13.83	peak			P	

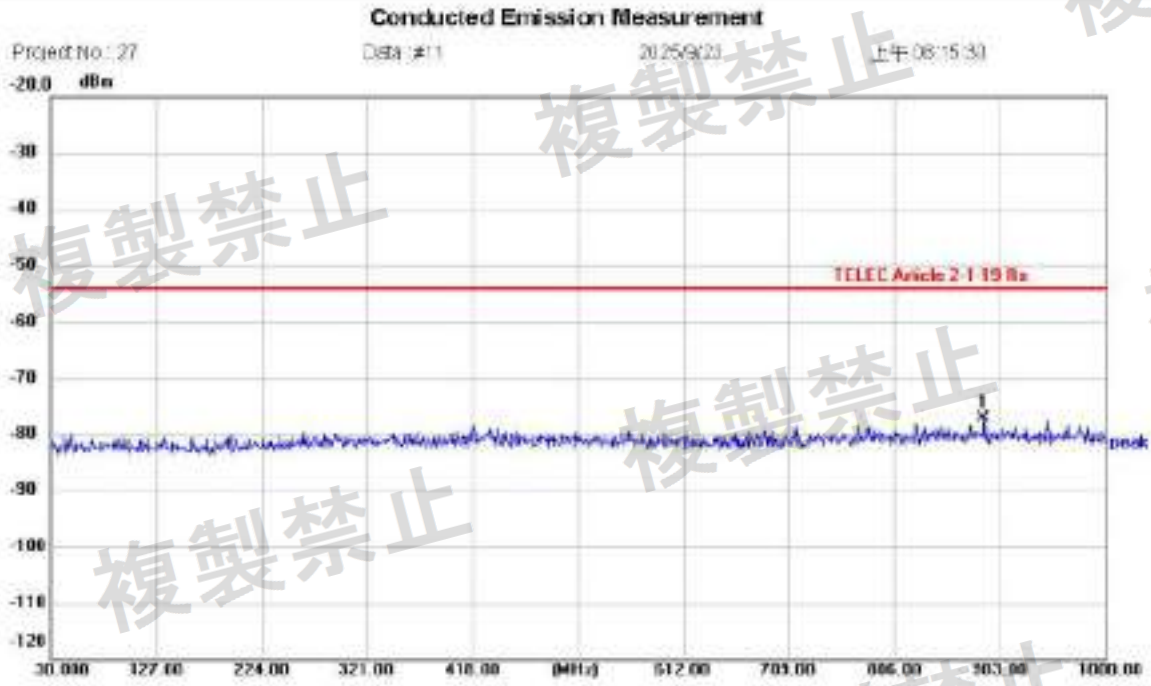


Site: Chamber 04
Limit: TELEC Article 2-1-19 Rx
EUT: W6M22508-24659
M/N:
Mode: Rx BLE 2M CH39
Note:

Polarization:
Power: 2.7 Vdc
Distance:

Temperature: 22.8(°C)
Humidity: 56 %RH

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	888.4500	-87.20	10.13	-77.07	-54.00	-23.07	peak			P	

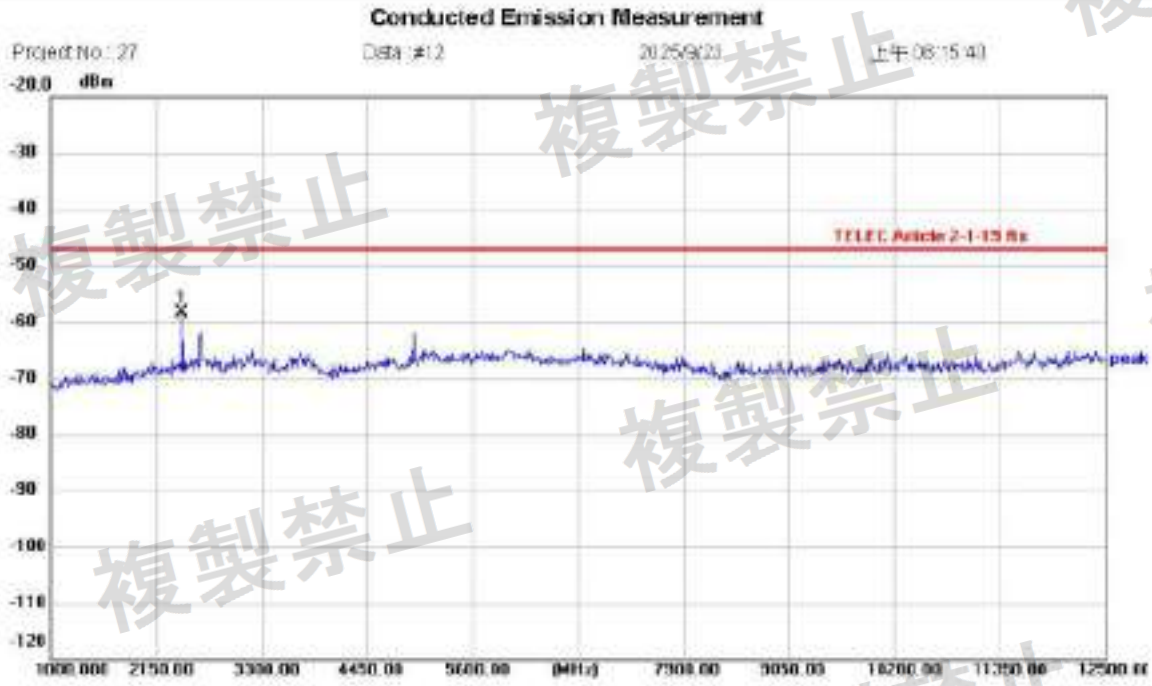


Site: Chamber 04
Limit: TELEC Article 2-1-19 Rx
EUT: W6M22508-24659
M/N:
Mode: Rx BLE 2M CH39
Note:

Polarization:
Power: 2.7 Vdc
Distance:

Temperature: 22.8(°C)
Humidity: 58 %RH

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	2437.500	-68.81	10.36	-58.45	-47.00	-11.45	peak			P	

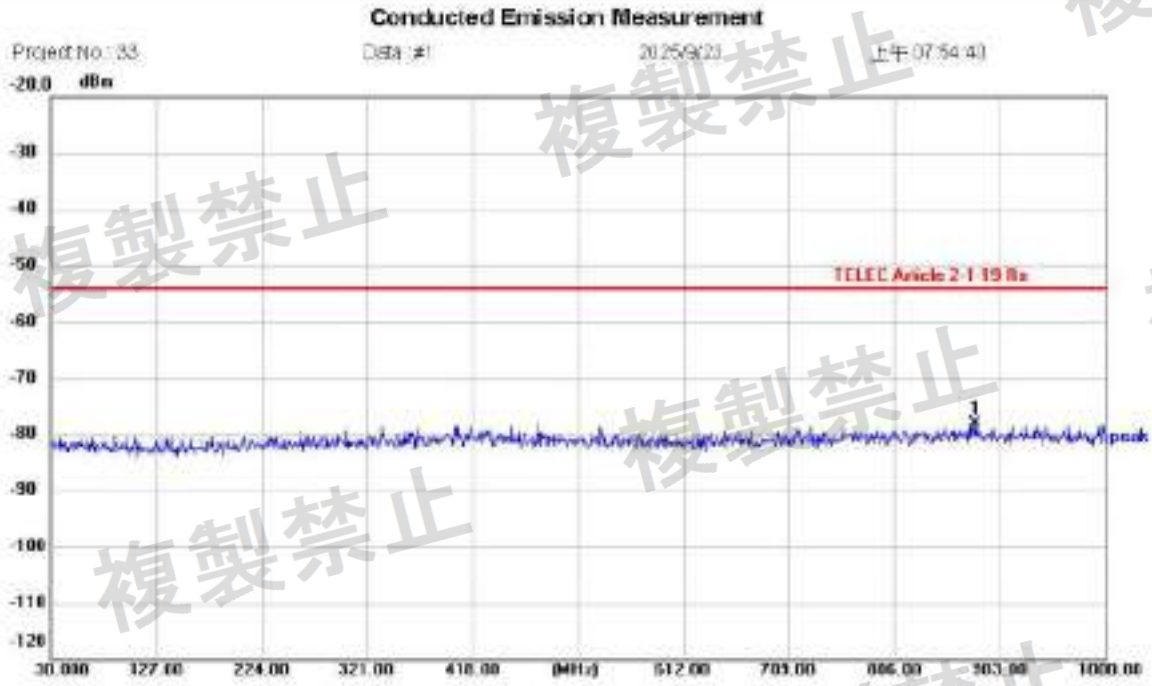


Site: Chamber 04
Limit: TELEC Article 2-1-19 Rx
EUT: W6M22508-24659
M/N:
Mode: Rx BLE 1M CH00
Note:

Polarization:
Power: 3.3 Vdc
Distance:

Temperature: 22.8(°C)
Humidity: 56 %RH

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	879.7200	-88.15	10.13	-78.02	-54.00	-24.02	peak			P	

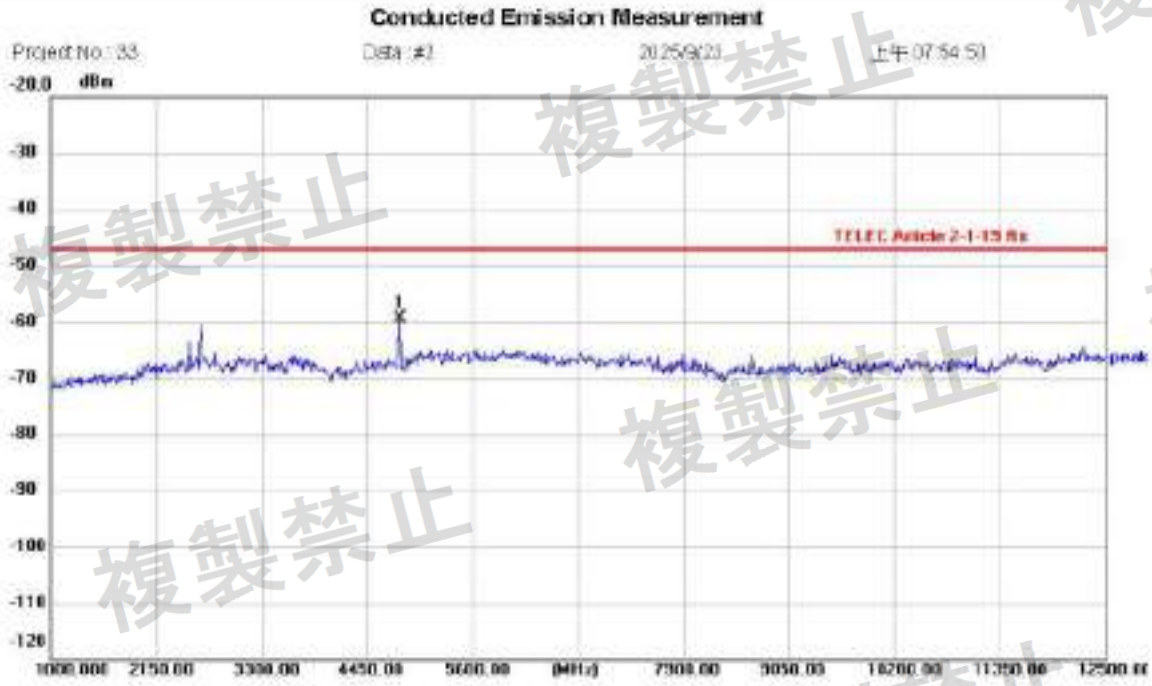


Site: Chamber 04
Limit: TELEC Article 2-1-19 Rx
EUT: W6M22508-24659
M/N:
Mode: Rx BLE 1M CH00
Note:

Polarization:
Power: 3.3 Vdc
Distance:

Temperature: 22.8(°C)
Humidity: 56 %RH

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	4806.500	-69.85	10.80	-59.25	-47.00	-12.25	peak			P	

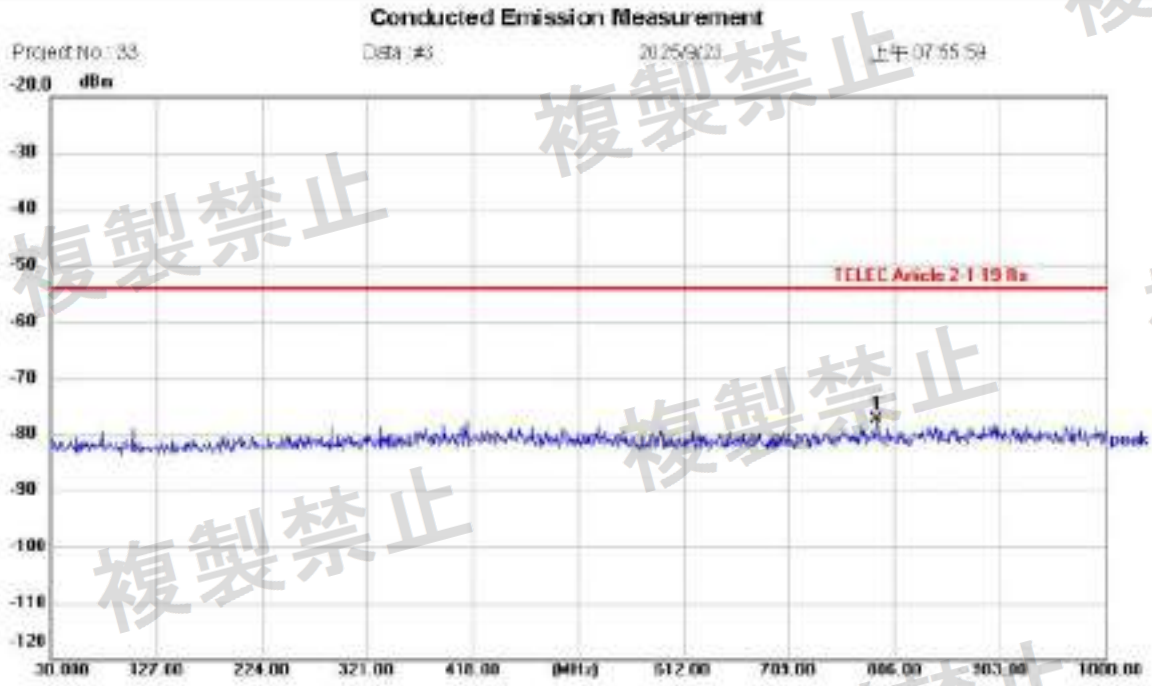


Site: Chamber 04
Limit: TELEC Article 2-1-19 Rx
EUT: W6M22508-24659
M/N:
Mode: Rx BLE 1M CH19
Note:

Polarization:
Power: 3.3 Vdc
Distance:

Temperature: 22.8(°C)
Humidity: 58 %RH

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	789.5100	-87.57	10.10	-77.47	-54.00	-23.47	peak			P	

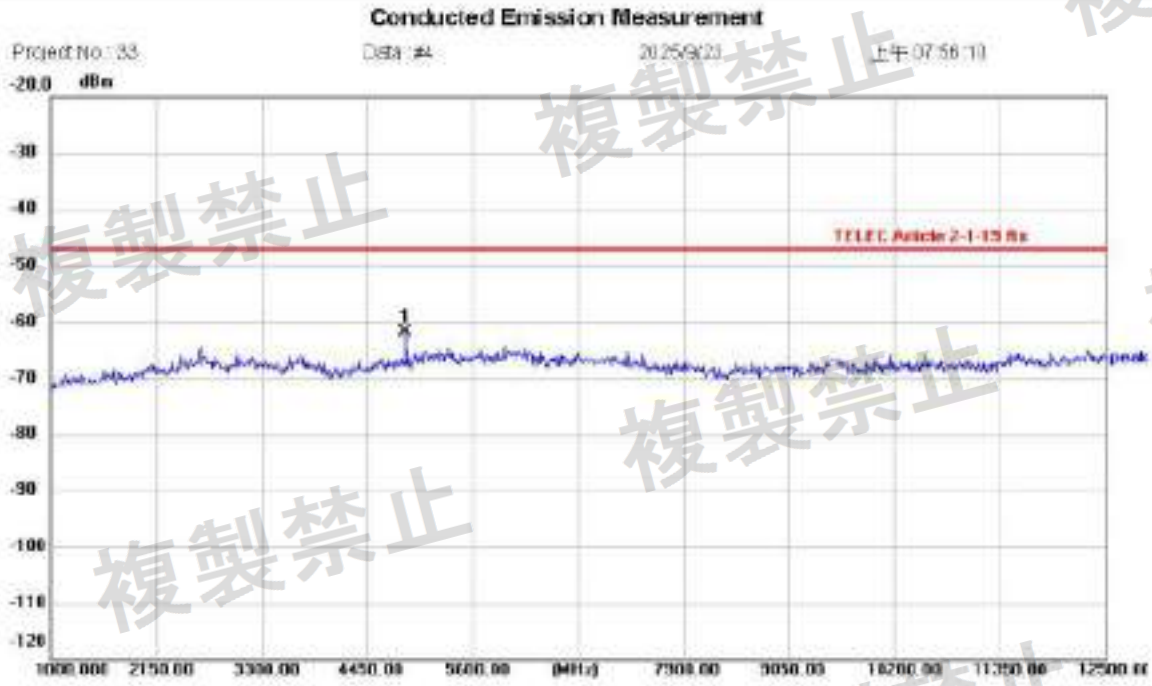


Site: Chamber 04
Limit: TELEC Article 2-1-19 Rx
EUT: W6M22508-24659
M/N:
Mode: Rx BLE 1M CH19
Note:

Polarization:
Power: 3.3 Vdc
Distance:

Temperature: 22.8(°C)
Humidity: 56 %RH

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	4875.500	-72.50	10.57	-61.93	-47.00	-14.93	peak			P	

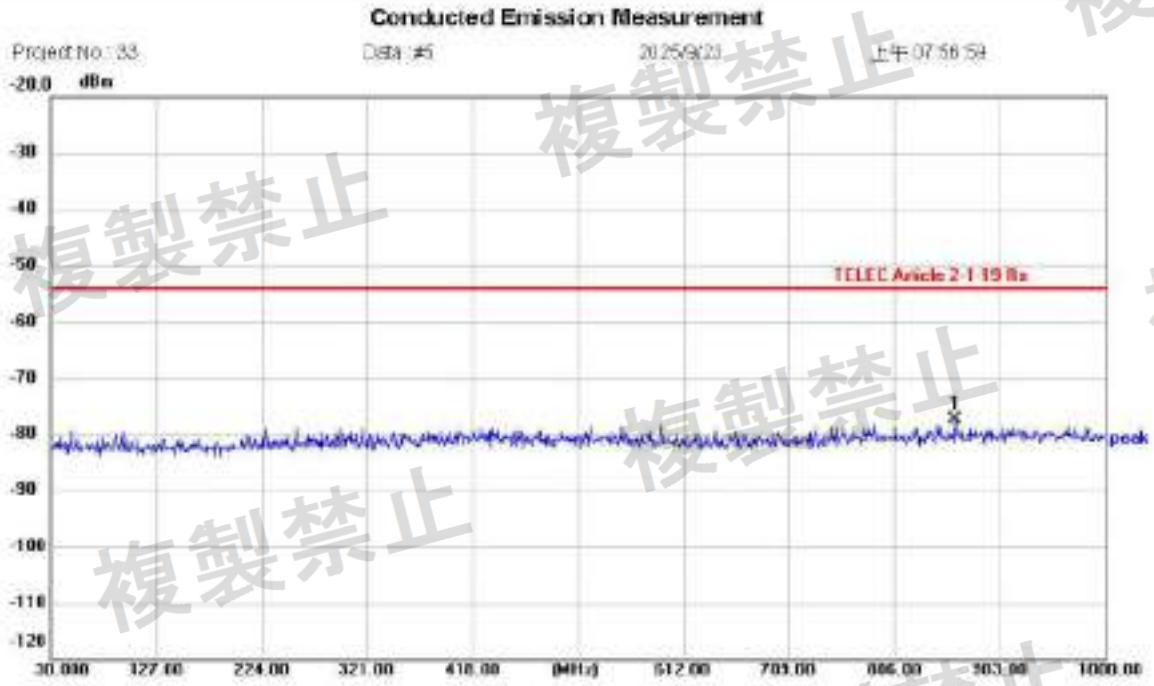


Site: Chamber 04
Limit: TELEC Article 2-1-19 Rx
EUT: W6M22508-24659
M/N:
Mode: Rx BLE 1M CH39
Note:

Polarization:
Power: 3.3 Vdc
Distance:

Temperature: 22.8(°C)
Humidity: 58 %RH

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	862.2600	-87.44	10.14	-77.30	-54.00	-23.30	peak			P	

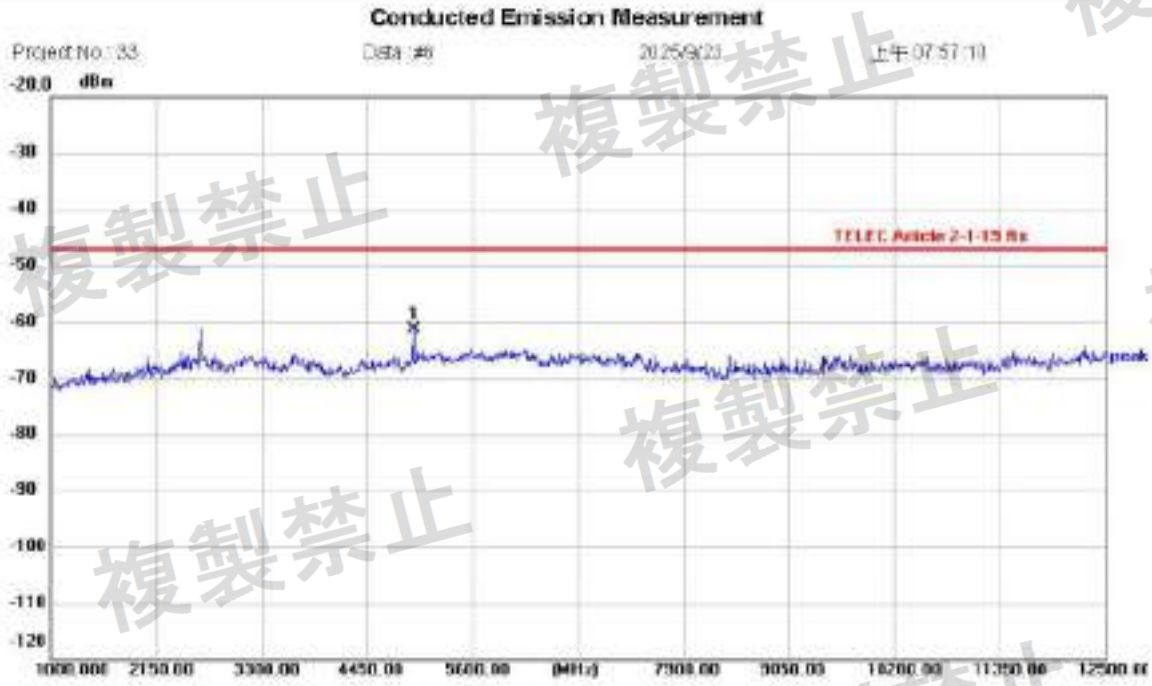


Site: Chamber 04
Limit: TELEC Article 2-1-19 Rx
EUT: W6M22508-24659
M/N:
Mode: Rx BLE 1M CH39
Note:

Polarization:
Power: 3.3 Vdc
Distance:

Temperature: 22.8(°C)
Humidity: 56 %RH

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	4956.000	-72.10	10.61	-61.49	-47.00	-14.49	peak			P	

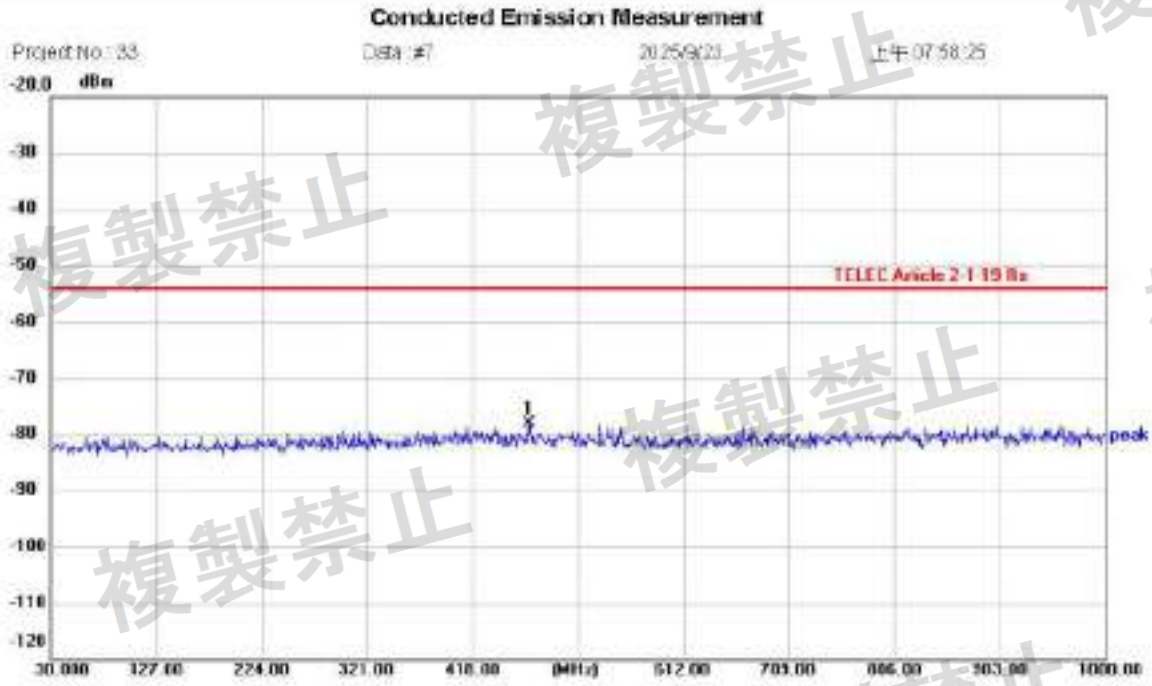


Site: Chamber 04
Limit: TELEC Article 2-1-19 Rx
EUT: W6M22508-24659
M/N:
Mode: Rx BLE 2M CH00
Note:

Polarization:
Power: 3.3 Vdc
Distance:

Temperature: 22.8(°C)
Humidity: 58 %RH

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	470.3800	-88.03	10.03	-78.00	-54.00	-24.00	peak			P	

Conducted Emission Measurement

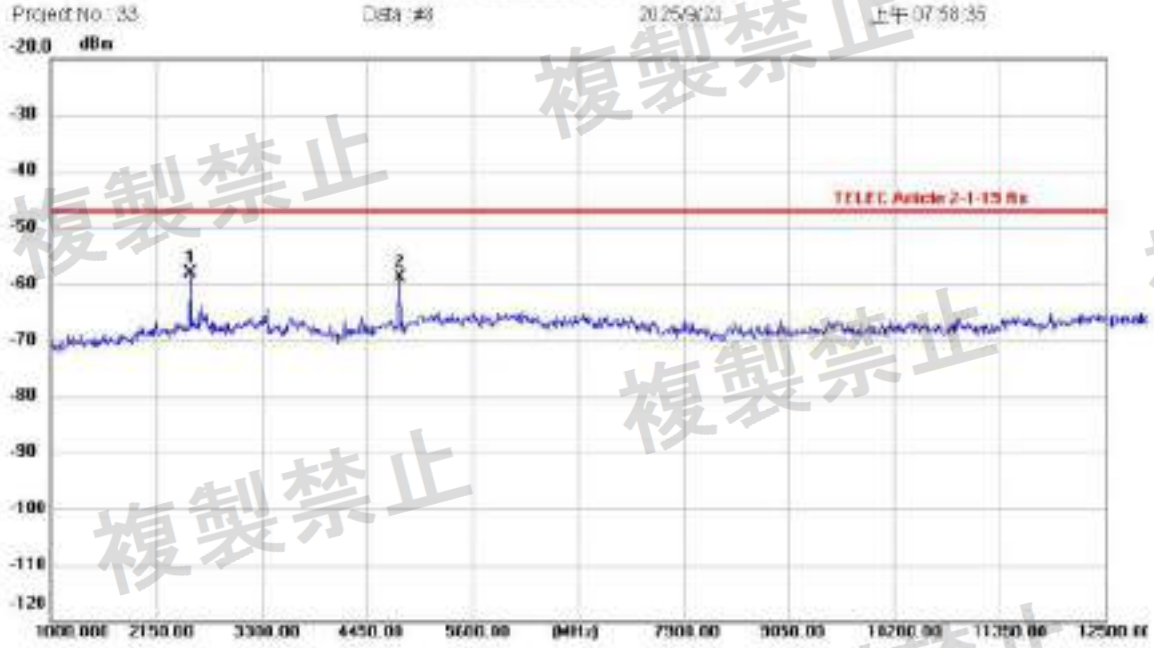


Site: Chamber 04
Limit: TELEC Article 2-1-19 Rx
EUT: W6M22508-24659
M/N:
Mode: Rx BLE 2M CH00
Note:

Polarization:
Power: 3.3 Vdc
Distance:

Temperature: 22.8(°C)
Humidity: 58 %RH

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	2518.000	-68.38	10.36	-58.02	-47.00	-11.02	peak			P	
2	4806.500	-69.58	10.60	-58.98	-47.00	-11.98	peak			P	

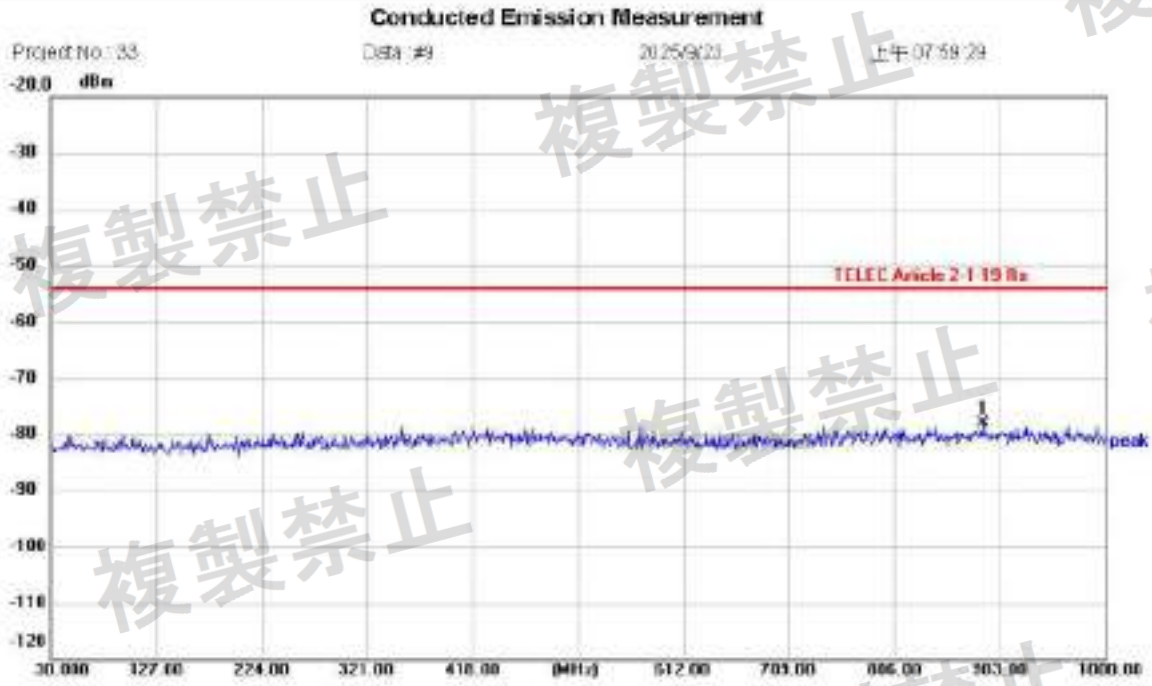


Site: Chamber 04
Limit: TELEC Article 2-1-19 Rx
EUT: W6M22508-24659
M/N:
Mode: Rx BLE 2M CH19
Note:

Polarization:
Power: 3.3 Vdc
Distance:

Temperature: 22.8(°C)
Humidity: 58 %RH

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	887.4800	-88.25	10.13	-78.12	-54.00	-24.12	peak			P	

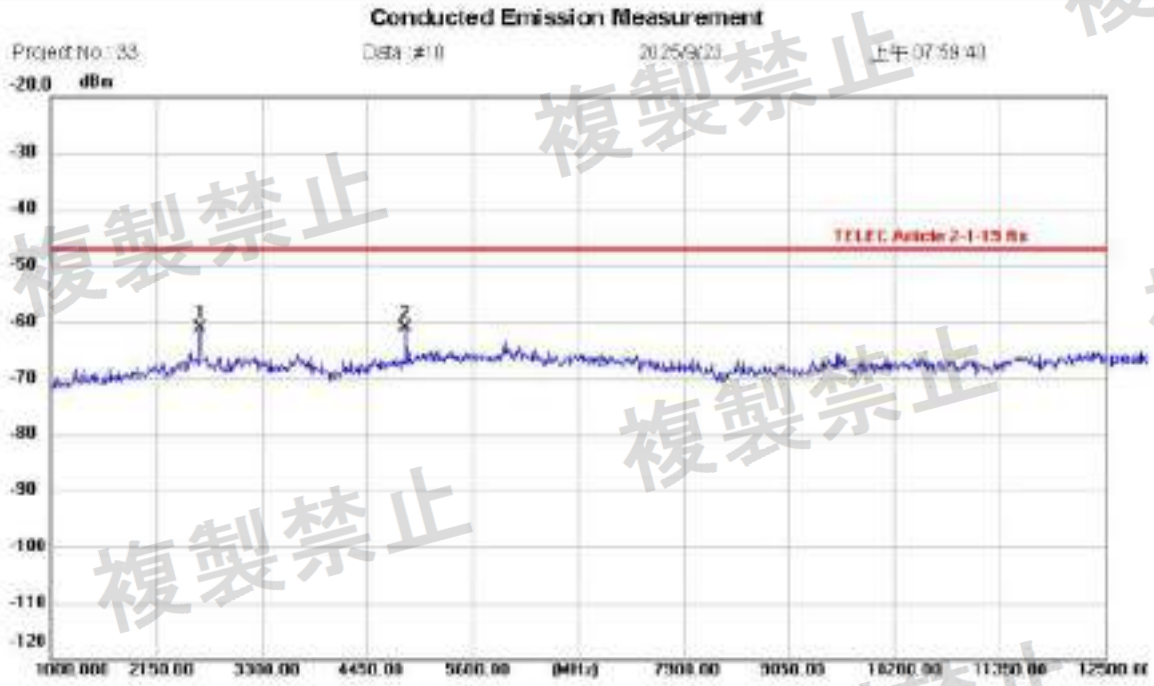


Site: Chamber 04
Limit: TELEC Article 2-1-19 Rx
EUT: W6M22508-24659
M/N:
Mode: Rx BLE 2M CH19
Note:

Polarization:
Power: 3.3 Vdc
Distance:

Temperature: 22.8(°C)
Humidity: 56 %RH

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	2633.000	-71.49	10.40	-61.09	-47.00	-14.09	peak			P	
2	4875.500	-71.78	10.57	-61.21	-47.00	-14.21	peak			P	

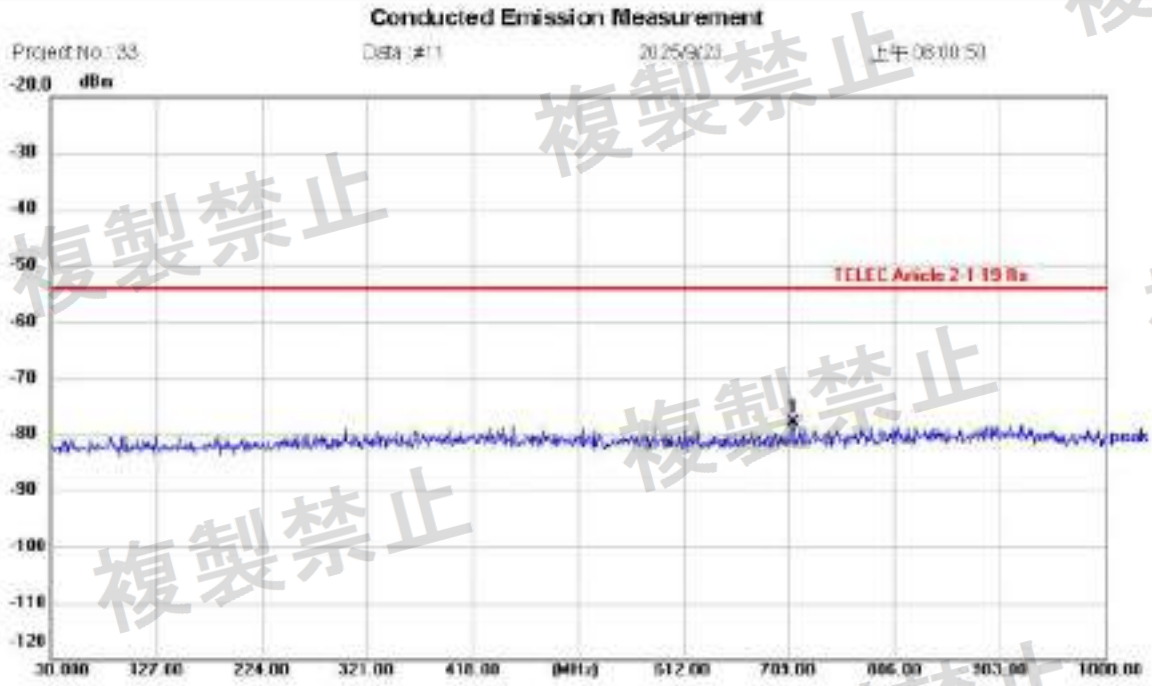


Site: Chamber 04
Limit: TELEC Article 2-1-19 Rx
EUT: W6M22508-24659
M/N:
Mode: Rx BLE 2M CH39
Note:

Polarization:
Power: 3.3 Vdc
Distance:

Temperature: 22.8(°C)
Humidity: 56 %RH

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	712.9800	-87.95	10.11	-77.84	-54.00	-23.84	peak			P	

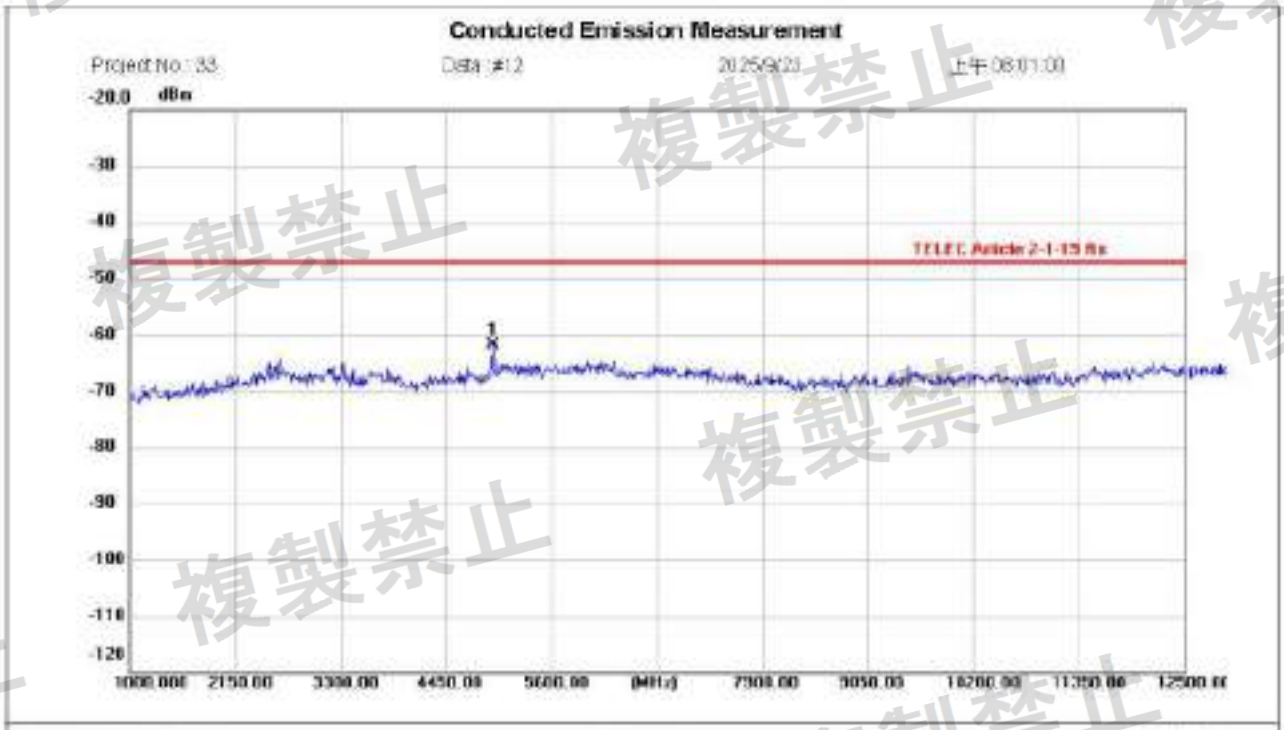

Site: Chamber 04
Limit: TELEC Article 2-1-19 Rx
EUT: W6M22508-24659
M/N:
Mode: Rx BLE 2M CH39
Note:

Polarization:
Power: 3.3 Vdc
Distance:

Temperature: 22.8(°C)
Humidity: 56 %RH

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F	Remark
1 *	4956.000	-72.58	10.61	-61.97	-47.00	-14.97	peak			P	

Limit:

Receiver operating	≤ 1000 MHz: ≤ 4nW (-54 dBm) ≥ 1000 MHz: ≤ 20nW (-47 dBm)

30-1000MHz

1. The measurement use RBW = 100 kHz, VBW = 100 kHz
2. The unit is dBm/100kHz for the Reading, the Result, and the Limit.
3. Correction Factor = Attenuator + Cable loss
4. The formula of measured value as: Test Result = Reading + Correction Factor
5. Line: PK Limit Line,


1000-12500MHz

1. The measurement use RBW = 1 MHz, VBW = 1 MHz
2. The unit is dBm/MHz for the Reading, the Result, and the Limit.
3. Correction Factor = Attenuator + Cable loss
4. The formula of measured value as: Test Result = Reading + Correction Factor
5. Line: PK Limit Line,

3.8 Interference Prevention Function

Test Requirement
Chiefly, the one automatically to transmit and to receive identification code with the wireless equipment of the wireless station used in the same premises.

Test Setup Block Diagram

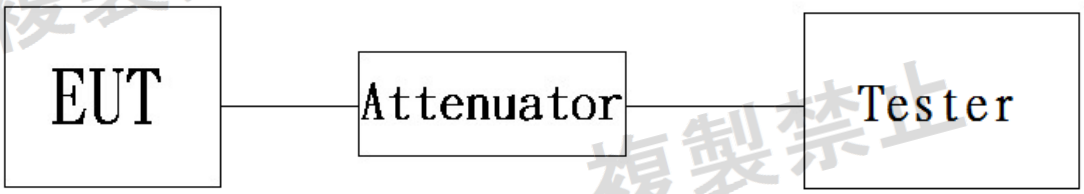

Test Procedure
1. Set the EUT in communication mode.
2. Open the test software.
3. Confirm the identification code.

Test Results
The identification code is correct.