


Site: AC1	Time: 2019/02/21 - 21:30
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AC1300 MU-MIMO 迷你 USB 無線網卡	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11-VHT20 at Channel 2437MHz, Ant 0 + 1	

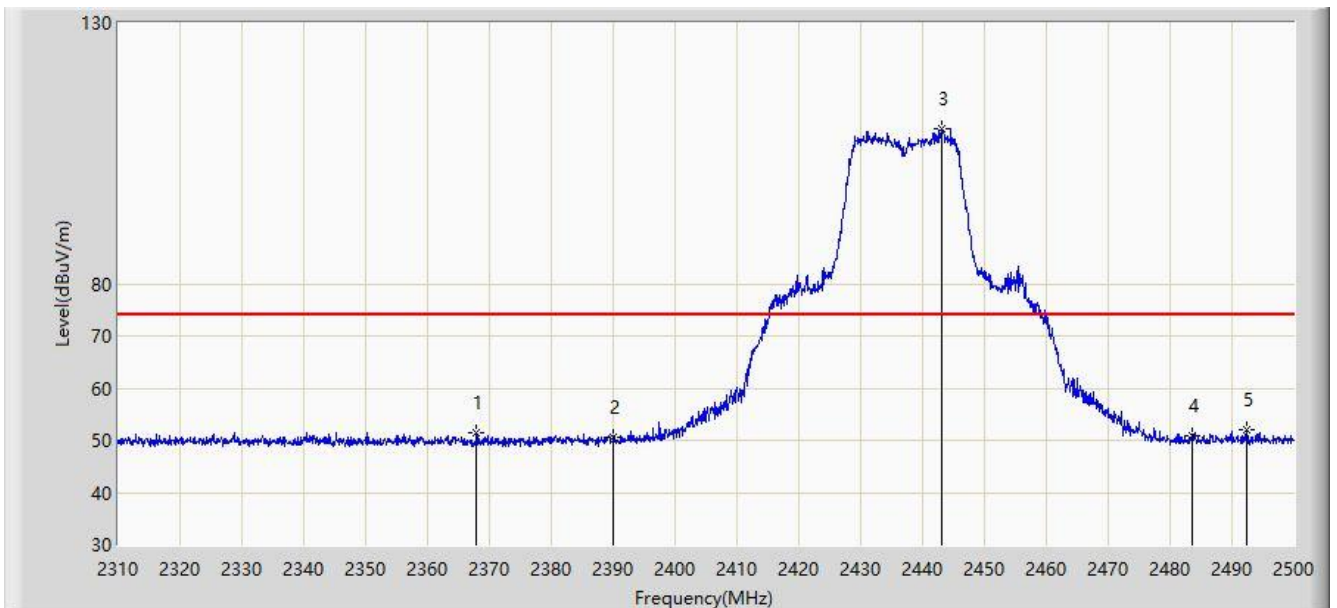


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2367.950	51.330	53.110	-22.670	74.000	-1.780	PK
2			2390.000	50.717	52.559	-23.283	74.000	-1.842	PK
3		*	2443.000	109.706	111.748	N/A	N/A	-2.042	PK
4			2483.500	50.948	53.025	-23.052	74.000	-2.077	PK
5			2492.400	52.058	54.136	-21.942	74.000	-2.078	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/02/21 - 21:31
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AC1300 MU-MIMO 迷你 USB 無線網卡	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11-VHT20 at Channel 2437MHz, Ant 0 + 1	

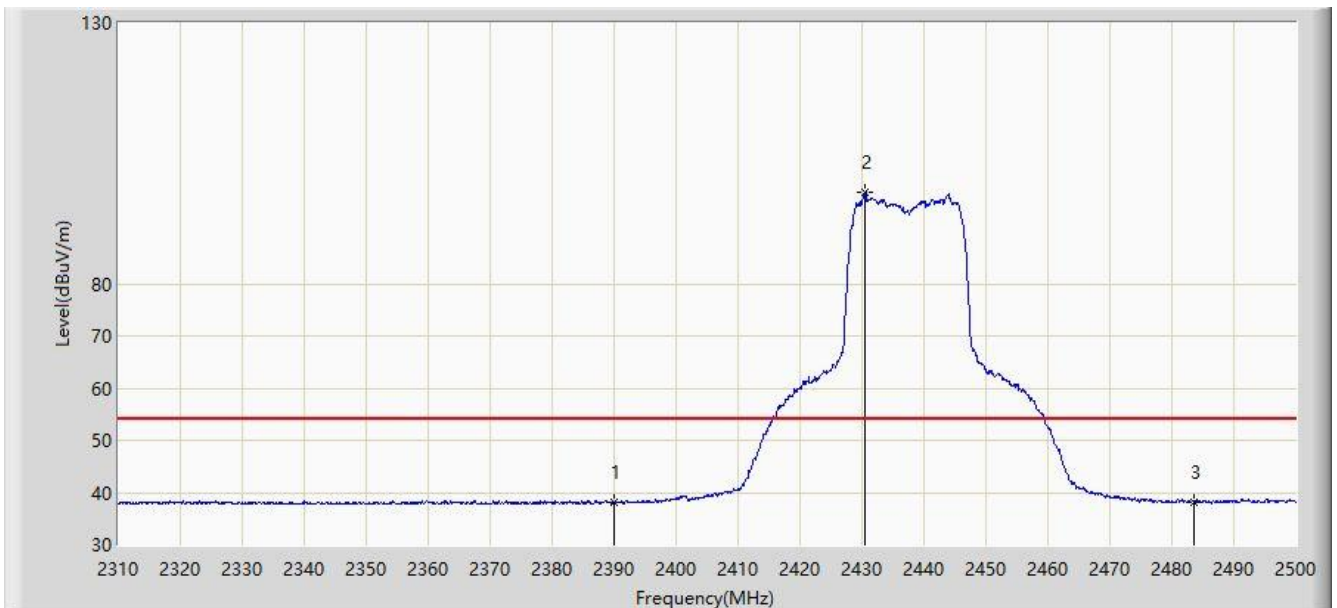


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	38.095	39.937	-15.905	54.000	-1.842	AV
2		*	2430.555	97.644	99.636	N/A	N/A	-1.992	AV
3			2483.500	38.260	40.337	-15.740	54.000	-2.077	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/02/21 - 21:33
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AC1300 MU-MIMO 迷你 USB 無線網卡	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11-VHT20 at Channel 2437MHz, Ant 0 + 1	

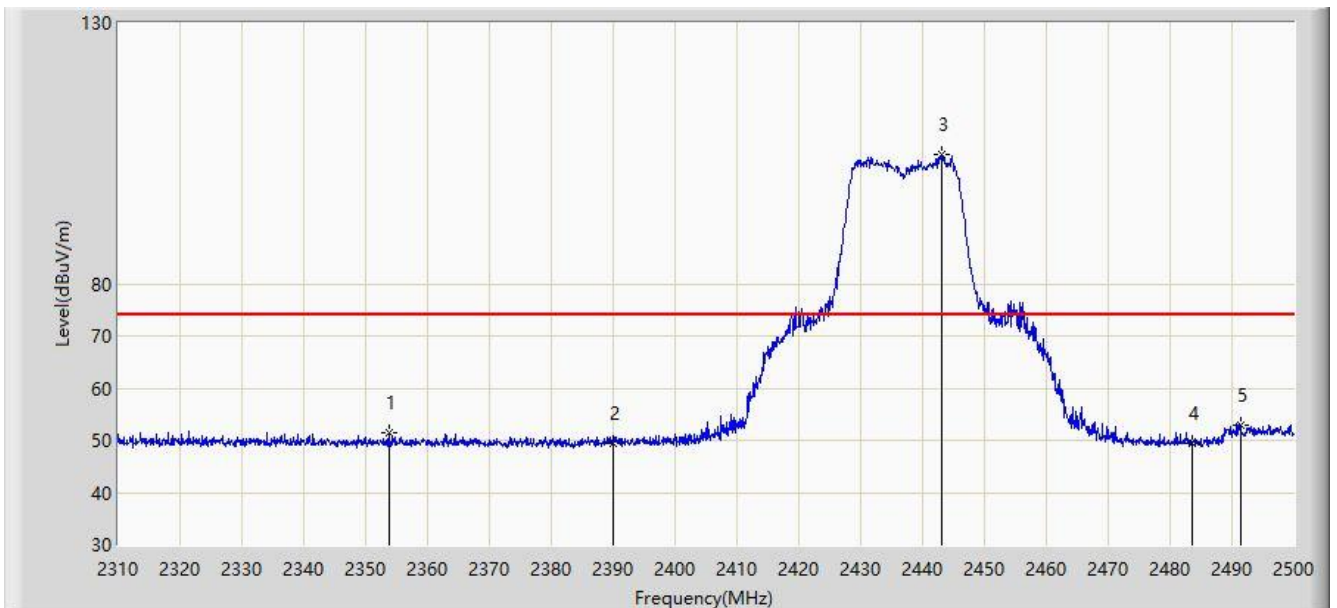


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2353.795	51.333	53.068	-22.667	74.000	-1.736	PK
2			2390.000	49.344	51.186	-24.656	74.000	-1.842	PK
3		*	2443.190	104.869	106.912	N/A	N/A	-2.043	PK
4			2483.500	49.479	51.556	-24.521	74.000	-2.077	PK
5			2491.450	53.037	55.115	-20.963	74.000	-2.077	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/02/21 - 21:34
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AC1300 MU-MIMO 迷你 USB 無線網卡	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11-VHT20 at Channel 2437MHz, Ant 0 + 1	

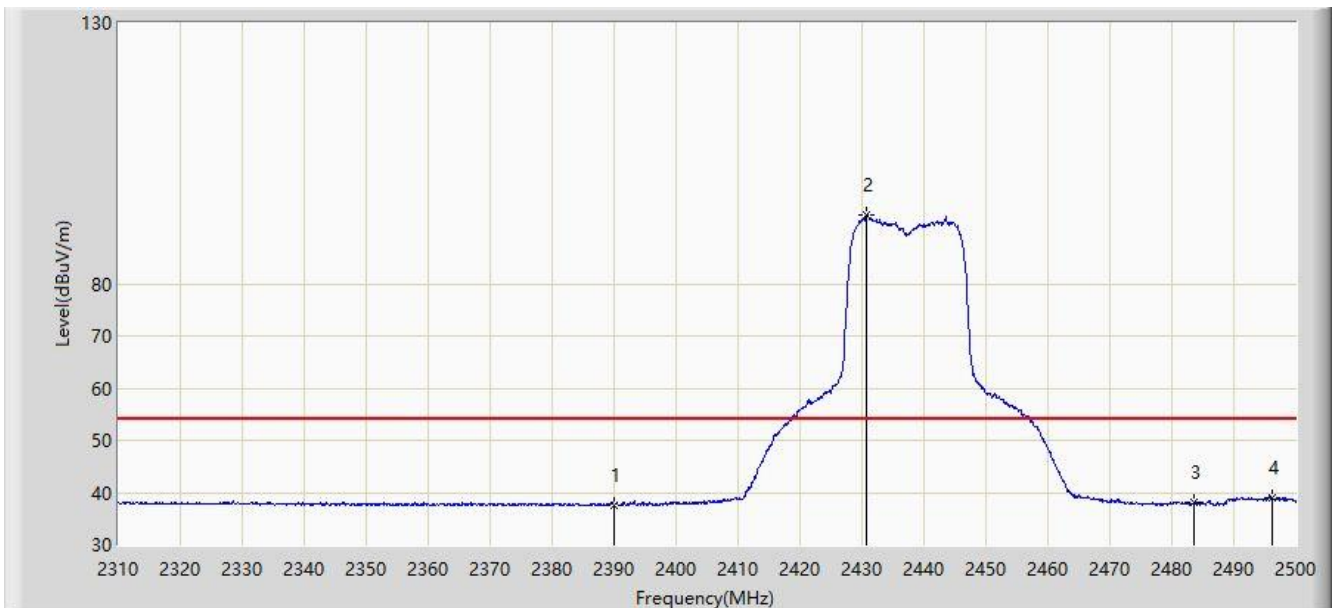


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	37.630	39.472	-16.370	54.000	-1.842	AV
2		*	2430.650	93.235	95.227	N/A	N/A	-1.992	AV
3			2483.500	38.008	40.085	-15.992	54.000	-2.077	AV
4			2496.105	39.062	41.141	-14.938	54.000	-2.079	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/02/28 - 04:02
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AC1300 MU-MIMO 迷你 USB 無線網卡	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11-VHT20 at Channel 2452MHz, Ant 0 + 1	

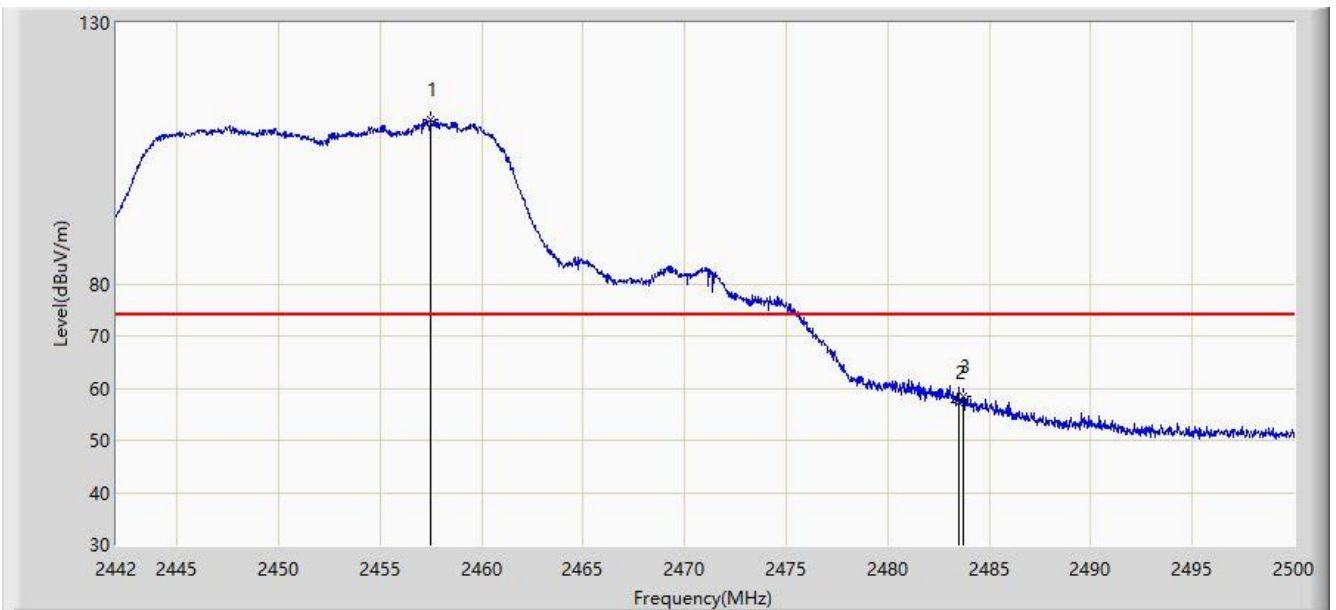


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2457.486	111.315	113.381	N/A	N/A	-2.066	PK
2			2483.500	57.113	59.190	-16.887	74.000	-2.077	PK
3			2483.702	58.460	60.537	-15.540	74.000	-2.076	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/02/28 - 04:03
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AC1300 MU-MIMO 迷你 USB 無線網卡	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11-VHT20 at Channel 2452MHz, Ant 0 + 1	

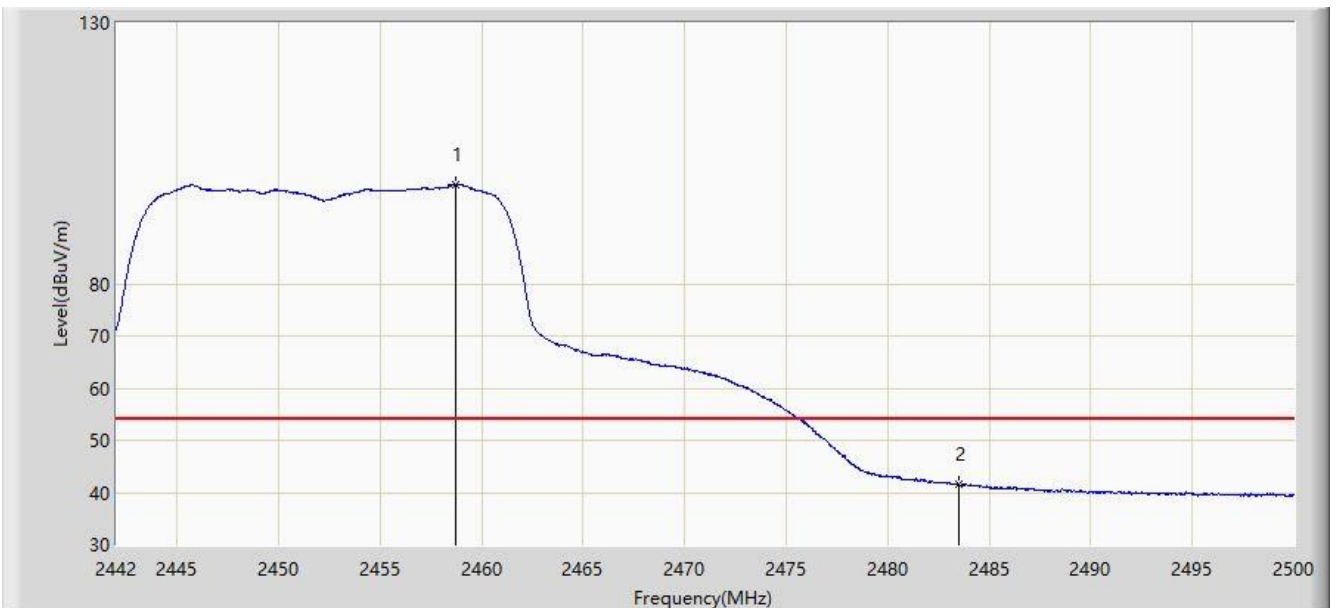


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2458.733	99.016	101.083	N/A	N/A	-2.067	AV
2			2483.500	41.725	43.802	-12.275	54.000	-2.077	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/02/28 - 04:03
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AC1300 MU-MIMO 迷你 USB 無線網卡	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11-VHT20 at Channel 2452MHz, Ant 0 + 1	

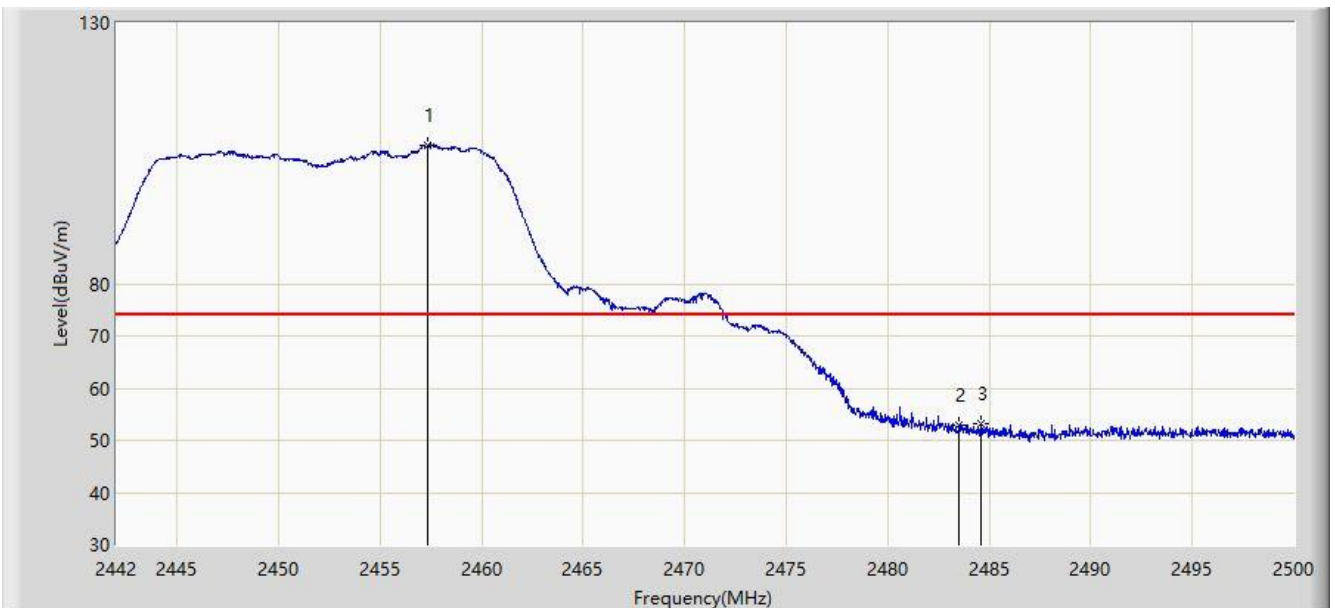


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2457.370	106.559	108.624	N/A	N/A	-2.066	PK
2			2483.500	52.991	55.068	-21.009	74.000	-2.077	PK
3			2484.601	53.048	55.125	-20.952	74.000	-2.077	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/02/28 - 04:04
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AC1300 MU-MIMO 迷你 USB 無線網卡	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11-VHT20 at Channel 2452MHz, Ant 0 + 1	

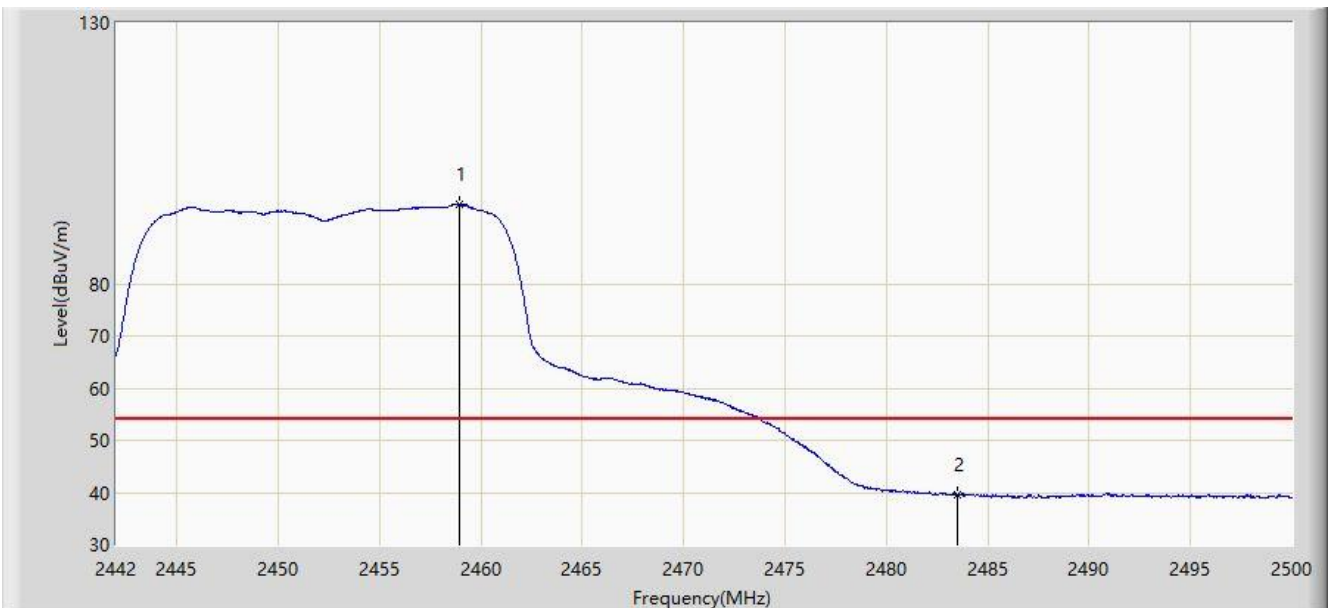


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2458.936	95.272	97.626	N/A	N/A	-2.355	AV
2			2483.500	39.641	42.017	-14.359	54.000	-2.376	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/02/28 - 04:05
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AC1300 MU-MIMO 迷你 USB 無線網卡	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11-VHT20 at Channel 2457MHz, Ant 0 + 1	

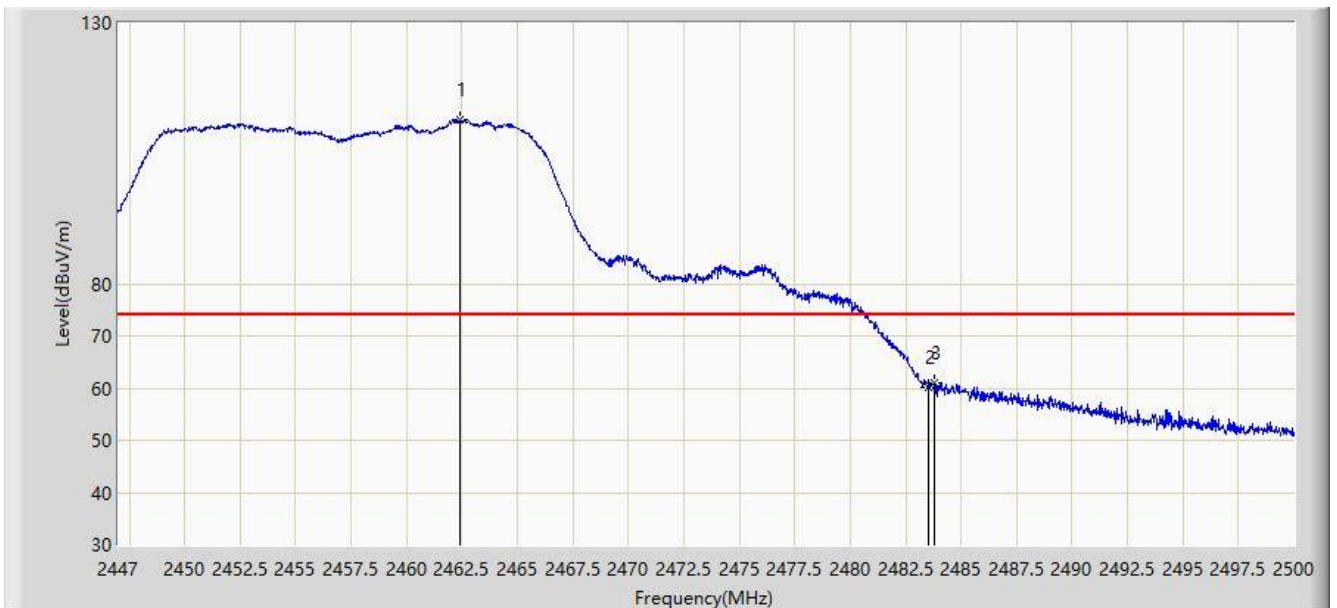


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2462.423	111.327	113.399	N/A	N/A	-2.072	PK
2			2483.500	60.246	62.323	-13.754	74.000	-2.077	PK
3			2483.809	60.979	63.056	-13.021	74.000	-2.076	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/02/28 - 04:06
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AC1300 MU-MIMO 迷你 USB 無線網卡	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11-VHT20 at Channel 2457MHz, Ant 0 + 1	

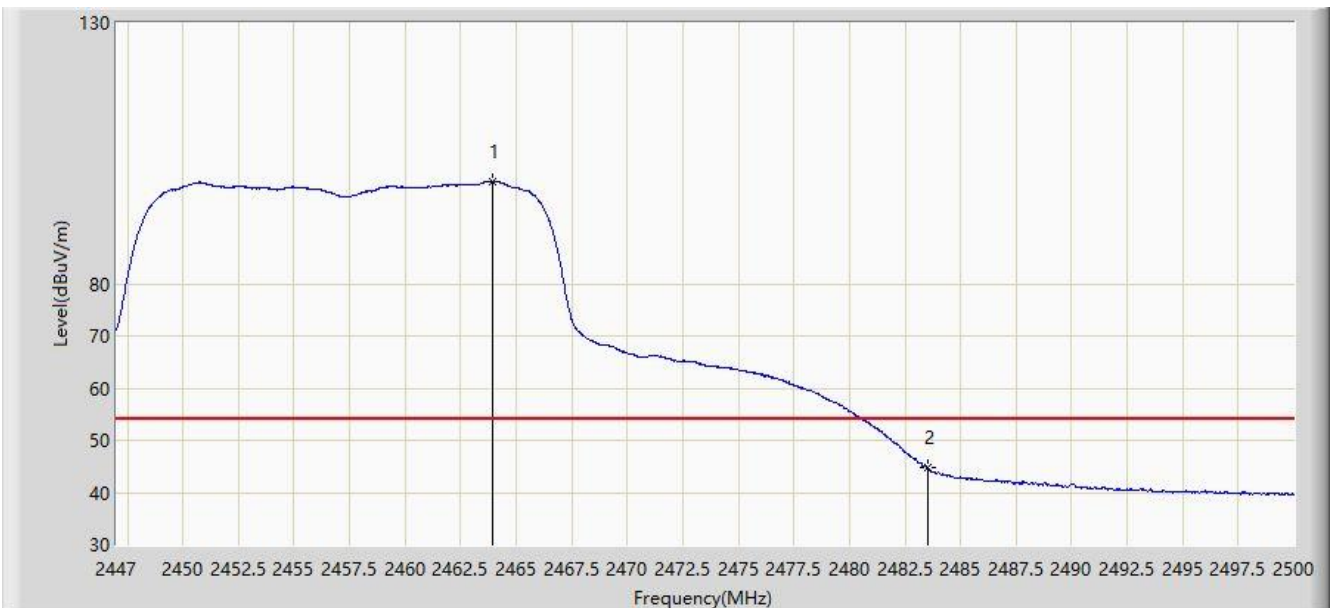


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2463.960	99.587	101.660	N/A	N/A	-2.073	AV
2			2483.500	44.661	46.738	-9.339	54.000	-2.077	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/02/28 - 04:06
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AC1300 MU-MIMO 迷你 USB 無線網卡	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11-VHT20 at Channel 2457MHz, Ant 0 + 1	

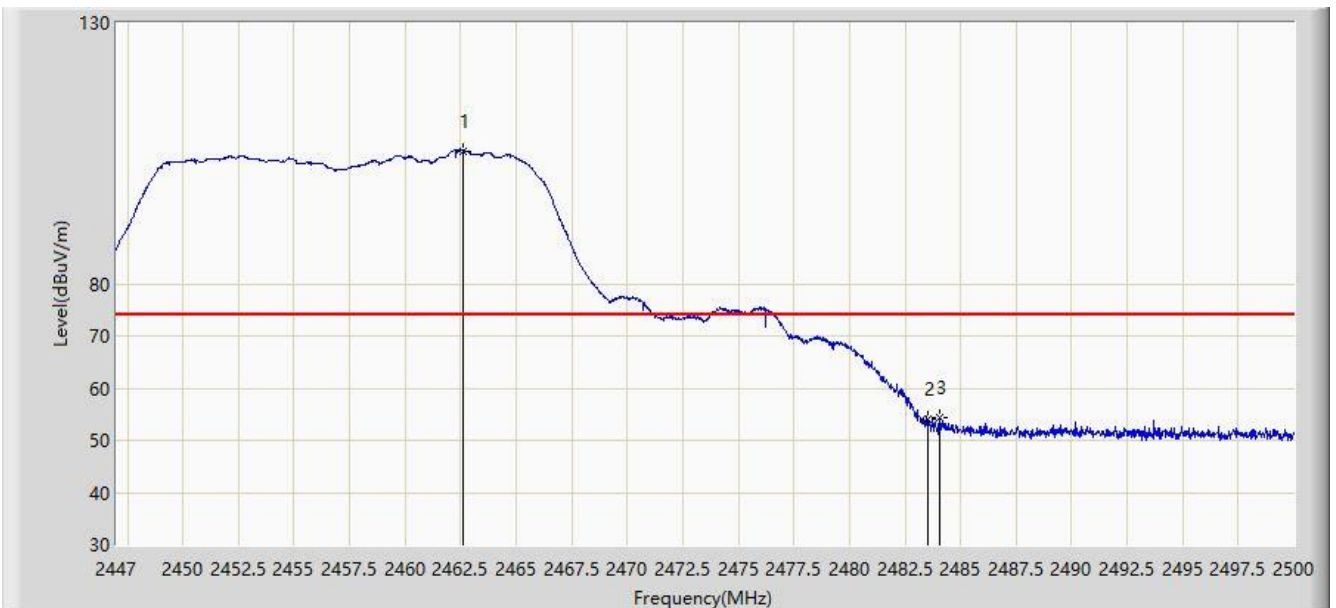


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2462.635	105.487	107.559	N/A	N/A	-2.072	PK
2			2483.500	53.938	56.015	-20.062	74.000	-2.077	PK
3			2484.047	54.449	56.526	-19.551	74.000	-2.077	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/02/28 - 04:07
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AC1300 MU-MIMO 迷你 USB 無線網卡	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11-VHT20 at Channel 2457MHz, Ant 0 + 1	

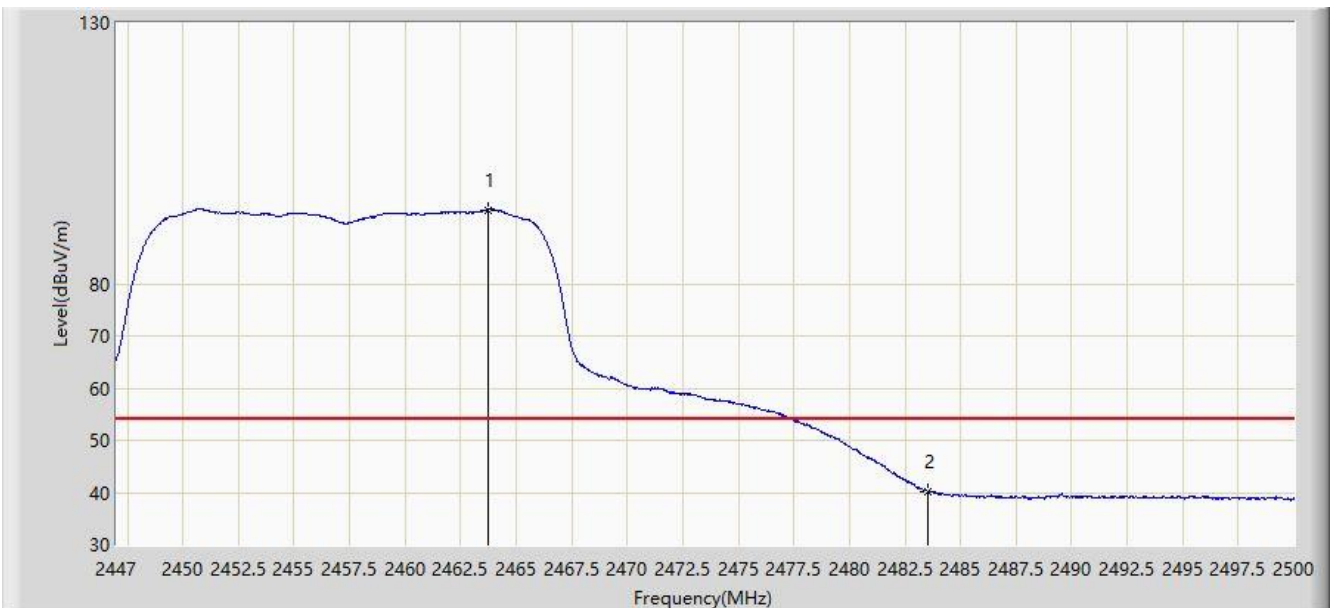


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2463.721	94.197	96.270	N/A	N/A	-2.073	AV
2			2483.500	40.285	42.362	-13.715	54.000	-2.077	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/02/21 - 21:41
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AC1300 MU-MIMO 迷你 USB 無線網卡	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11-VHT20 at Channel 2462MHz, Ant 0 + 1	

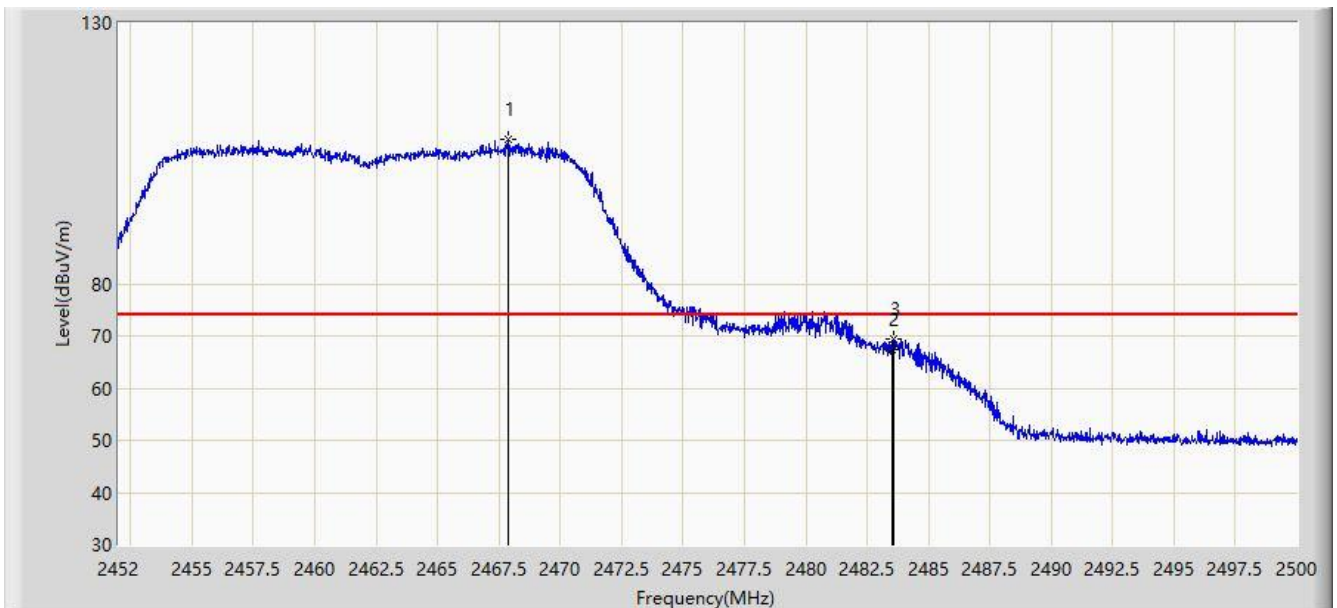


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2467.864	107.773	109.847	N/A	N/A	-2.074	PK
2			2483.500	67.390	69.467	-6.610	74.000	-2.077	PK
3			2483.560	69.482	71.559	-4.518	74.000	-2.077	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/02/21 - 21:39
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AC1300 MU-MIMO 迷你 USB 無線網卡	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11-VHT20 at Channel 2462MHz, Ant 0 + 1	

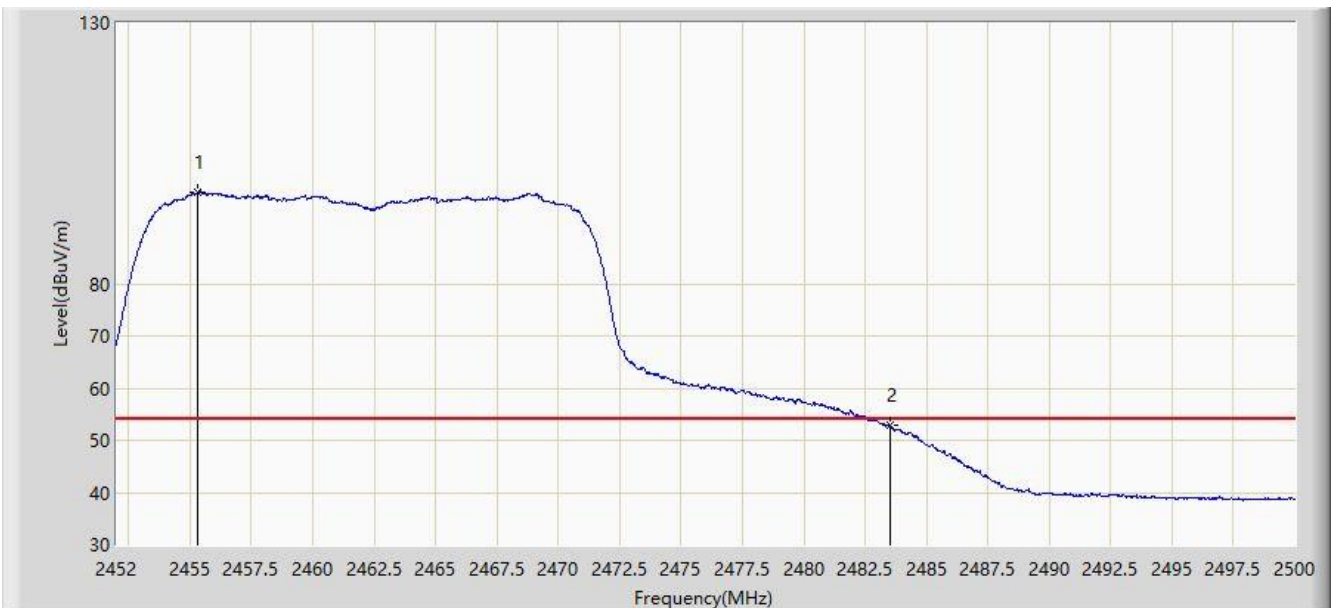


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2455.312	97.612	99.674	N/A	N/A	-2.062	AV
2			2483.500	52.811	54.888	-1.189	54.000	-2.077	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/02/21 - 21:43
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AC1300 MU-MIMO 迷你 USB 無線網卡	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11-VHT20 at Channel 2462MHz, Ant 0 + 1	

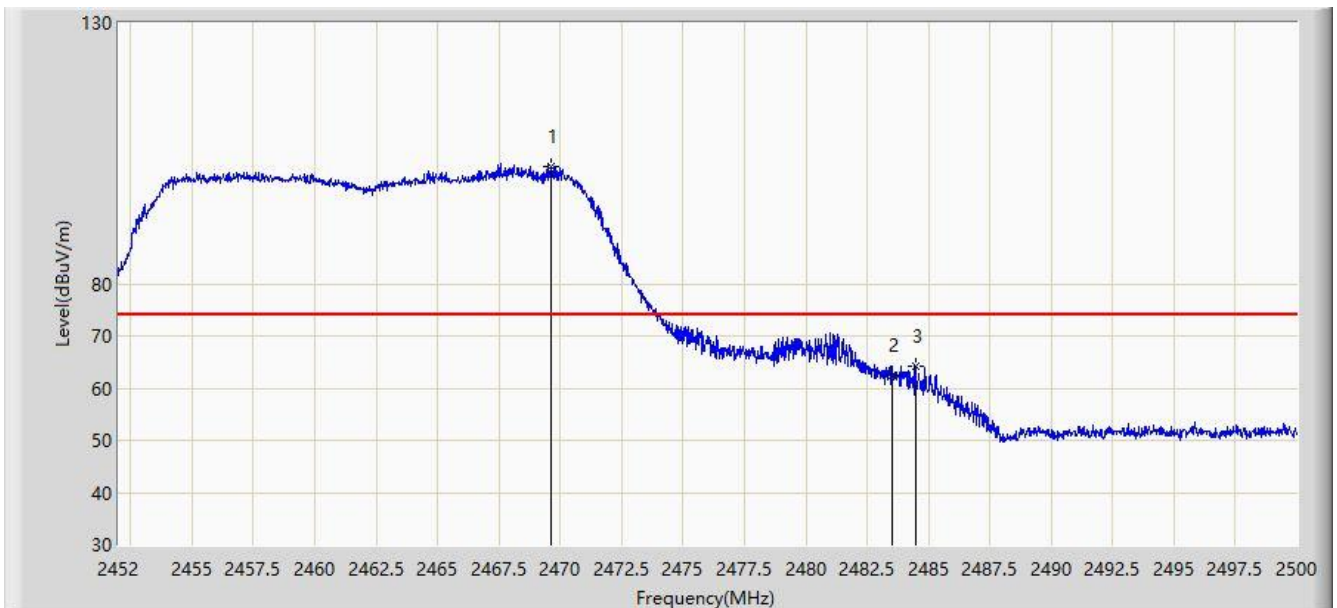


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2469.640	102.545	104.619	N/A	N/A	-2.075	PK
2			2483.500	62.567	64.644	-11.433	74.000	-2.077	PK
3			2484.472	64.129	66.206	-9.871	74.000	-2.076	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/02/21 - 21:42
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AC1300 MU-MIMO 迷你 USB 無線網卡	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11-VHT20 at Channel 2462MHz, Ant 0 + 1	

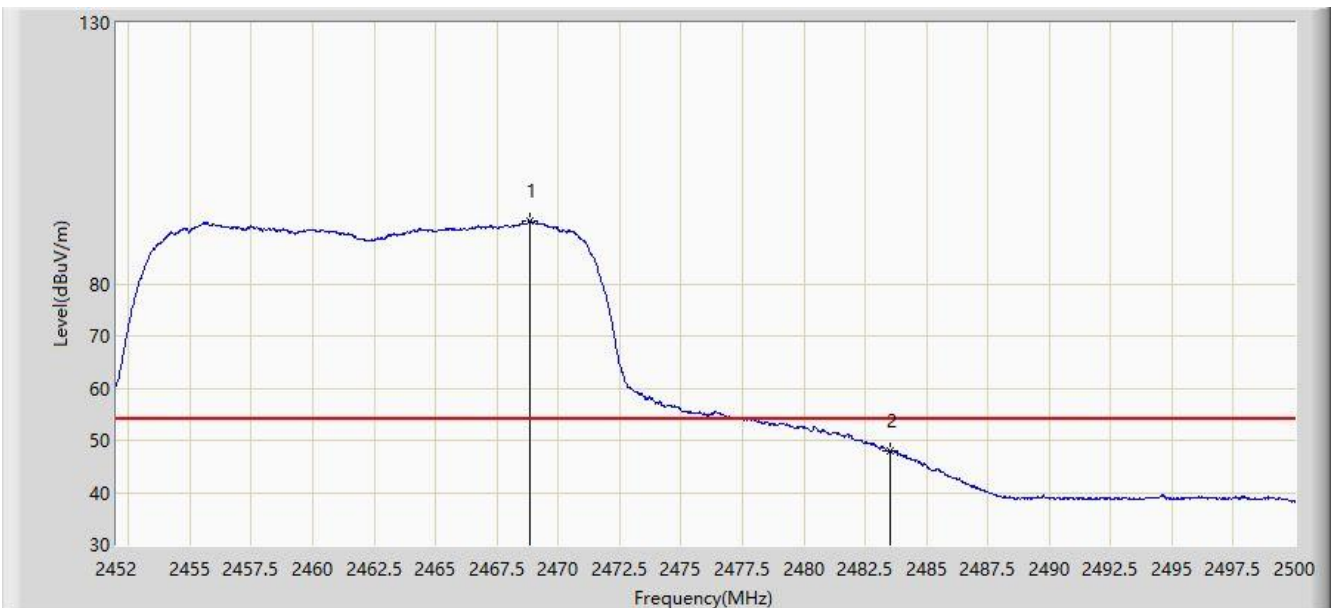


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2468.848	92.025	94.099	N/A	N/A	-2.074	AV
2			2483.500	47.986	50.063	-6.014	54.000	-2.077	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/02/21 - 21:49
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AC1300 MU-MIMO 迷你 USB 無線網卡	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11-VHT40 at Channel 2422MHz, Ant 0 + 1	

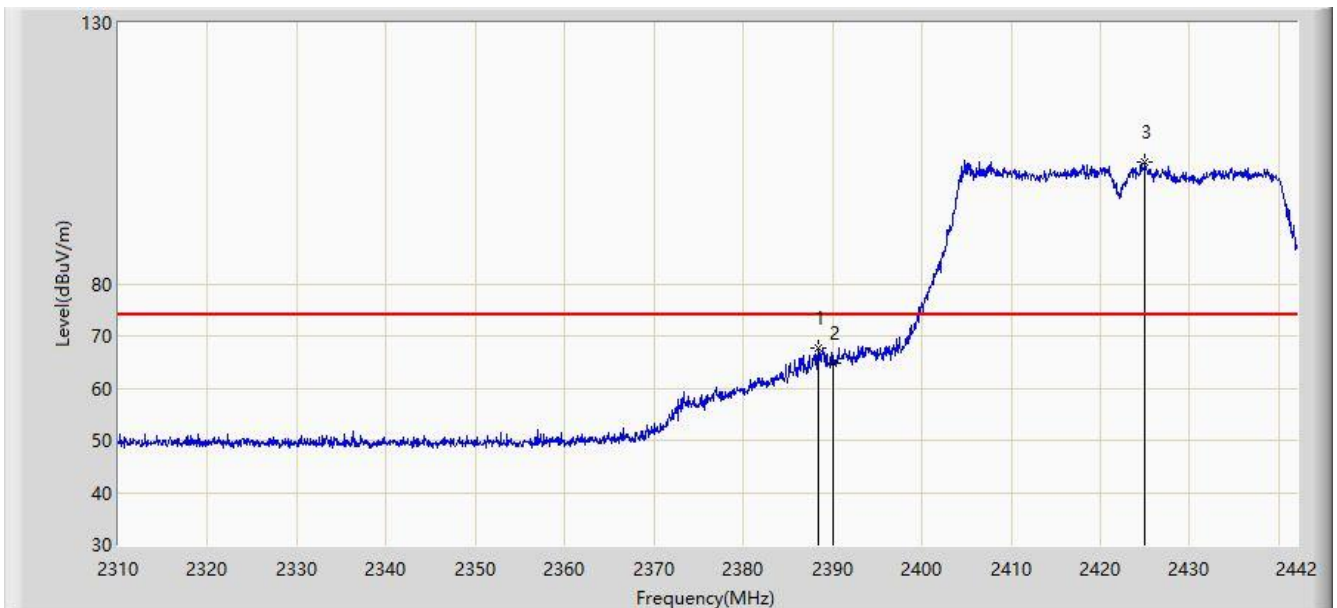


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2388.408	67.800	69.637	-6.200	74.000	-1.838	PK
2			2390.000	64.842	66.684	-9.158	74.000	-1.842	PK
3		*	2425.038	103.312	105.282	N/A	N/A	-1.970	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/02/21 - 21:48
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AC1300 MU-MIMO 迷你 USB 無線網卡	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11-VHT40 at Channel 2422MHz, Ant 0 + 1	

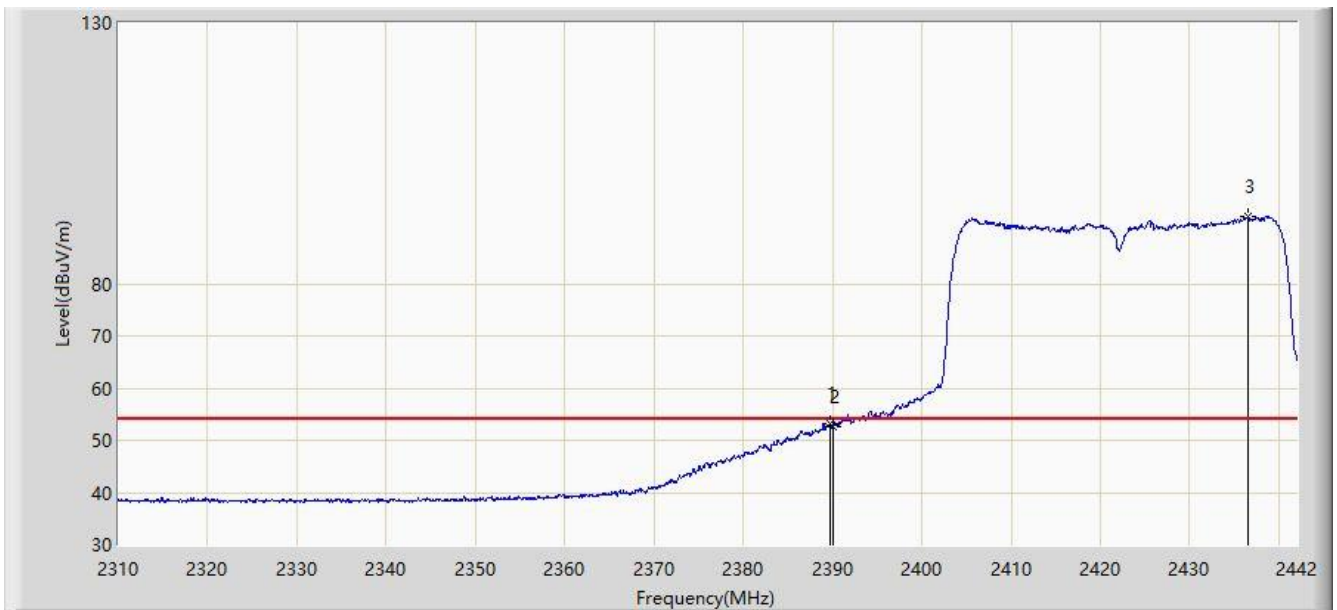


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2389.662	53.143	54.984	-0.857	54.000	-1.841	AV
2			2390.000	52.703	54.545	-1.297	54.000	-1.842	AV
3		*	2436.522	92.889	94.905	N/A	N/A	-2.016	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/02/21 - 21:50
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AC1300 MU-MIMO 迷你 USB 無線網卡	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11-VHT40 at Channel 2422MHz, Ant 0 + 1	

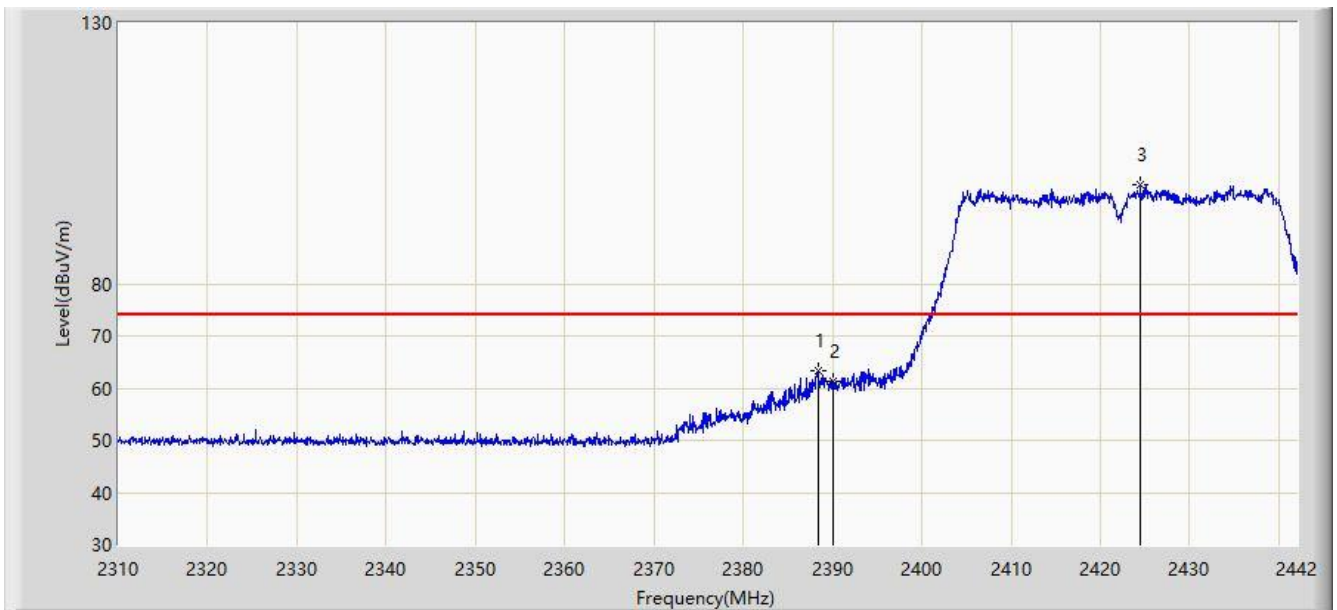


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2388.342	63.332	65.169	-10.668	74.000	-1.837	PK
2			2390.000	61.279	63.121	-12.721	74.000	-1.842	PK
3		*	2424.510	98.976	100.944	N/A	N/A	-1.969	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/02/21 - 21:51
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AC1300 MU-MIMO 迷你 USB 無線網卡	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11-VHT40 at Channel 2422MHz, Ant 0 + 1	

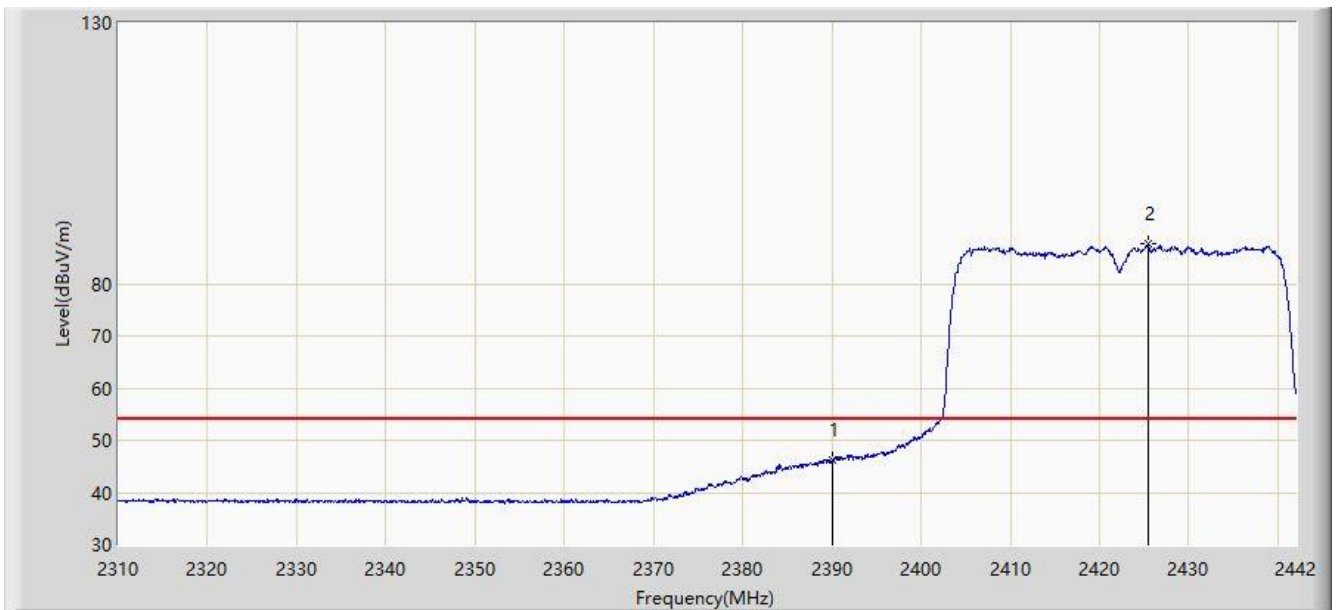


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	46.129	47.971	-7.871	54.000	-1.842	AV
2		*	2425.500	87.637	89.609	N/A	N/A	-1.972	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/02/28 - 04:15
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AC1300 MU-MIMO 迷你 USB 無線網卡	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11-VHT40 at Channel 2427MHz, Ant 0 + 1	

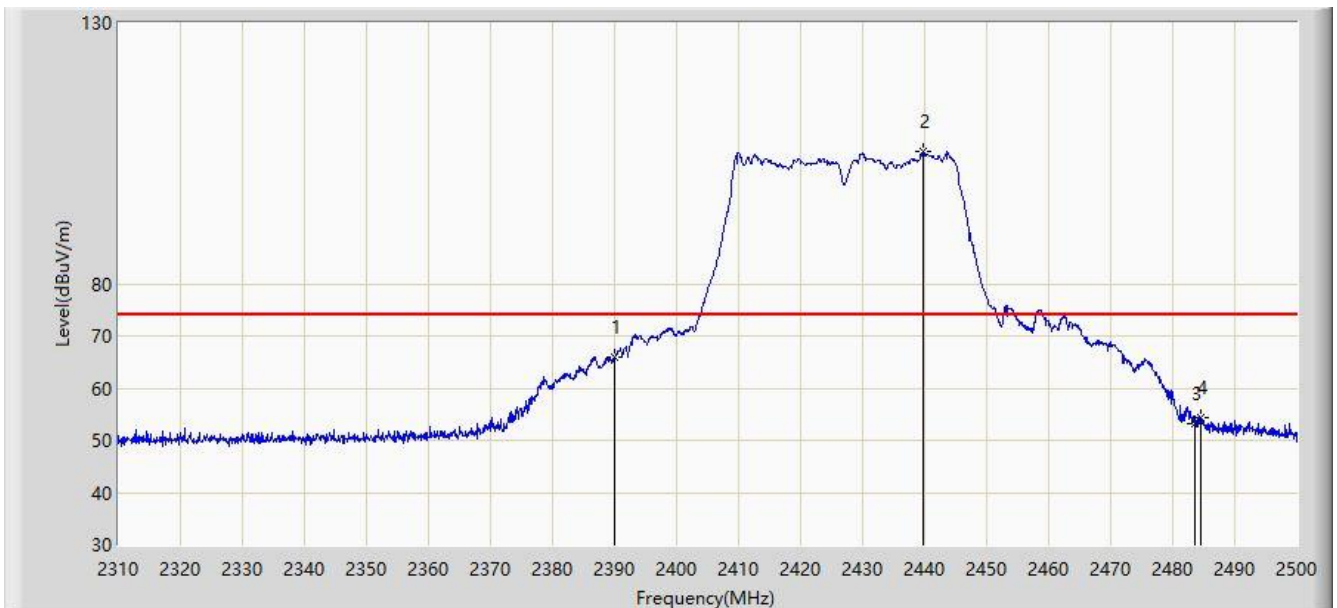


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	66.003	67.845	-7.997	74.000	-1.842	PK
2		*	2439.770	105.317	107.346	N/A	N/A	-2.029	PK
3			2483.500	53.231	55.308	-20.769	74.000	-2.077	PK
4			2484.610	54.229	56.306	-19.771	74.000	-2.077	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/02/28 - 04:14
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AC1300 MU-MIMO 迷你 USB 無線網卡	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11-VHT40 at Channel 2427MHz, Ant 0 + 1	

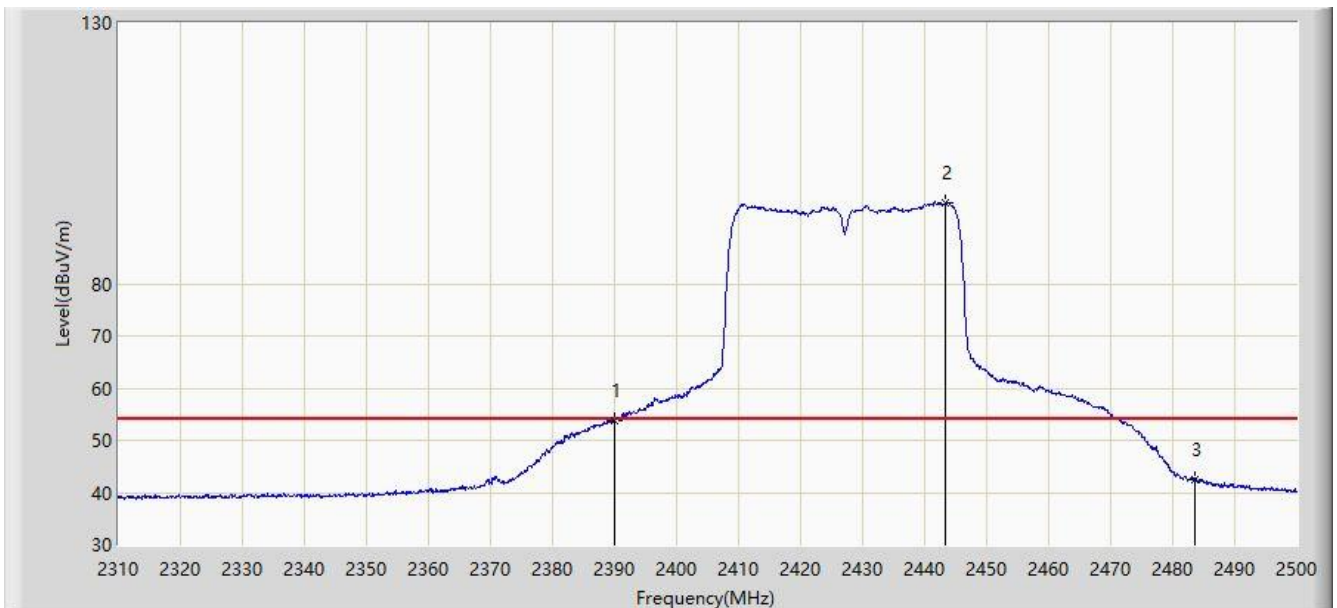


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	53.835	55.677	-0.165	54.000	-1.842	AV
2		*	2443.380	95.473	97.517	N/A	N/A	-2.044	AV
3			2483.500	42.424	44.501	-11.576	54.000	-2.077	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/02/28 - 04:16
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AC1300 MU-MIMO 迷你 USB 無線網卡	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11-VHT40 at Channel 2427MHz, Ant 0 + 1	

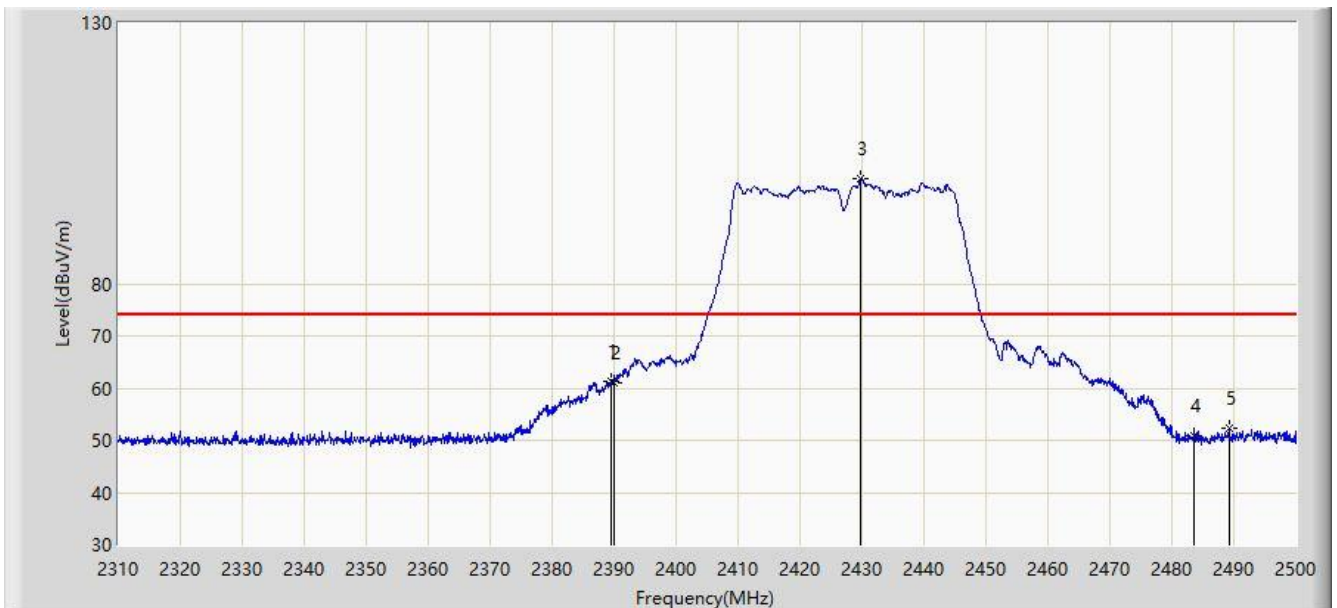


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2389.420	61.224	63.064	-12.776	74.000	-1.840	PK
2			2390.000	61.039	62.881	-12.961	74.000	-1.842	PK
3		*	2429.795	100.046	102.035	N/A	N/A	-1.988	PK
4			2483.500	50.839	52.916	-23.161	74.000	-2.077	PK
5			2489.170	52.205	54.283	-21.795	74.000	-2.077	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/02/28 - 04:16
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AC1300 MU-MIMO 迷你 USB 無線網卡	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11-VHT40 at Channel 2427MHz, Ant 0 + 1	

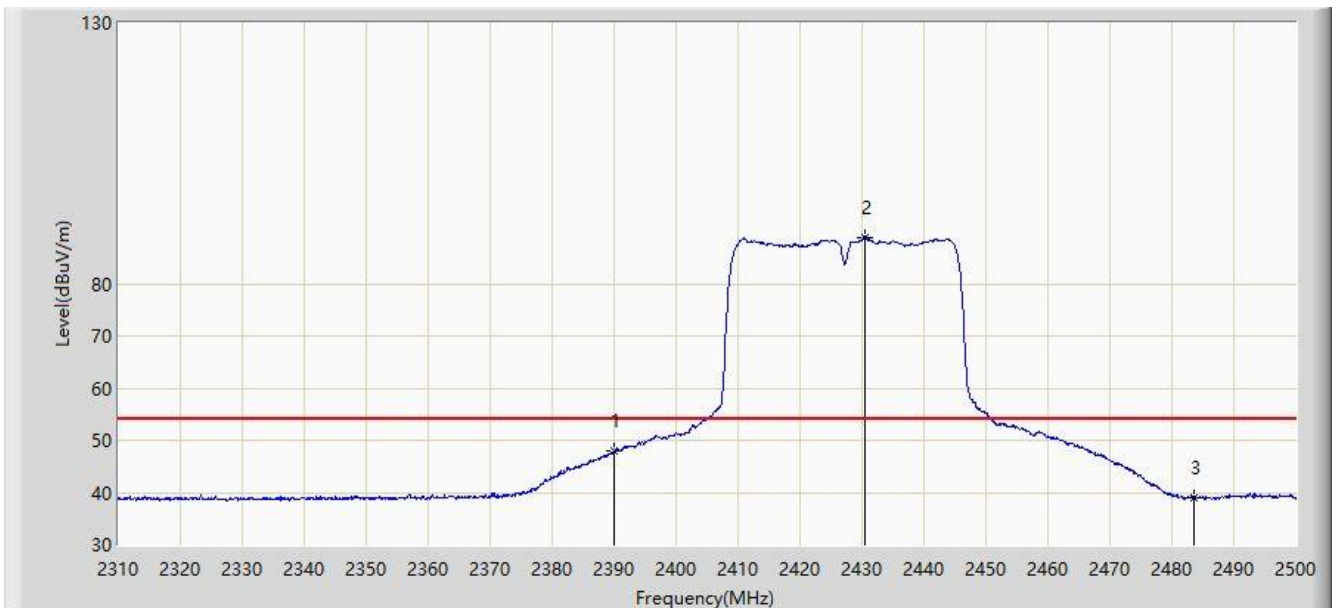


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	47.872	49.714	-6.128	54.000	-1.842	AV
2		*	2430.365	88.863	90.854	N/A	N/A	-1.992	AV
3			2483.500	39.108	41.185	-14.892	54.000	-2.077	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/02/21 - 22:00
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AC1300 MU-MIMO 迷你 USB 無線網卡	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11-VHT40 at Channel 2437MHz, Ant 0 + 1	

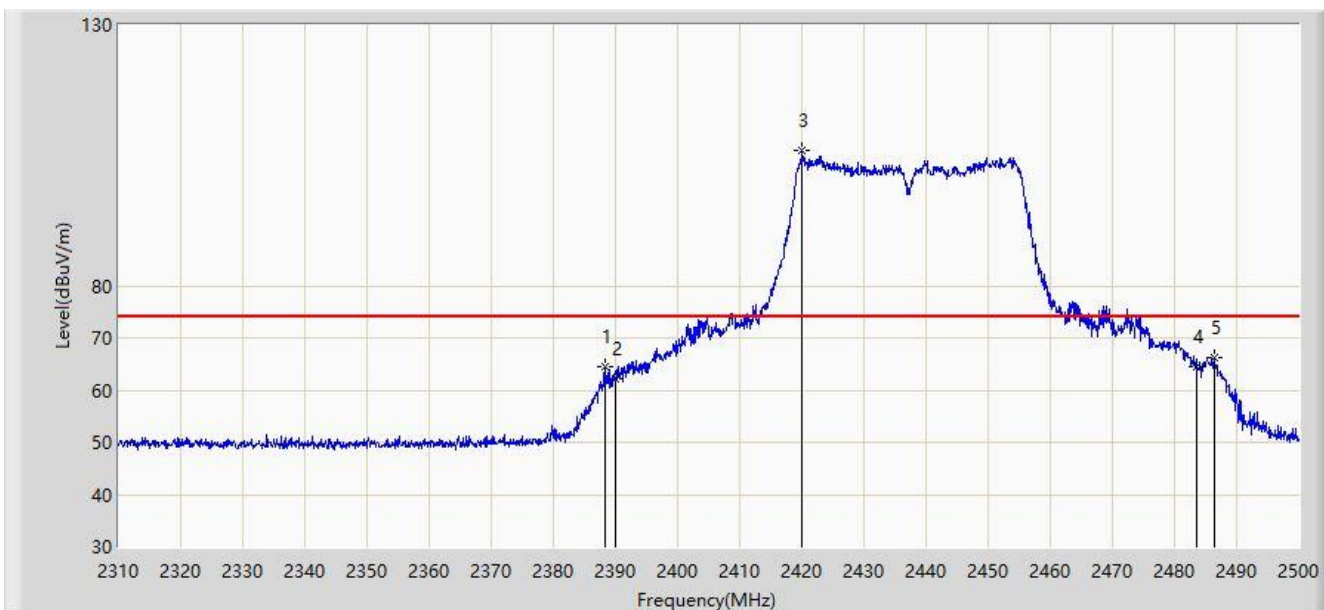


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2388.280	64.494	66.331	-9.506	74.000	-1.837	PK
2			2390.000	62.228	64.070	-11.772	74.000	-1.842	PK
3		*	2420.105	105.986	107.936	N/A	N/A	-1.950	PK
4			2483.500	64.419	66.496	-9.581	74.000	-2.077	PK
5			2486.415	66.292	68.369	-7.708	74.000	-2.077	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/02/21 - 21:56
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AC1300 MU-MIMO 迷你 USB 無線網卡	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11-VHT40 at Channel 2437MHz, Ant 0 + 1	

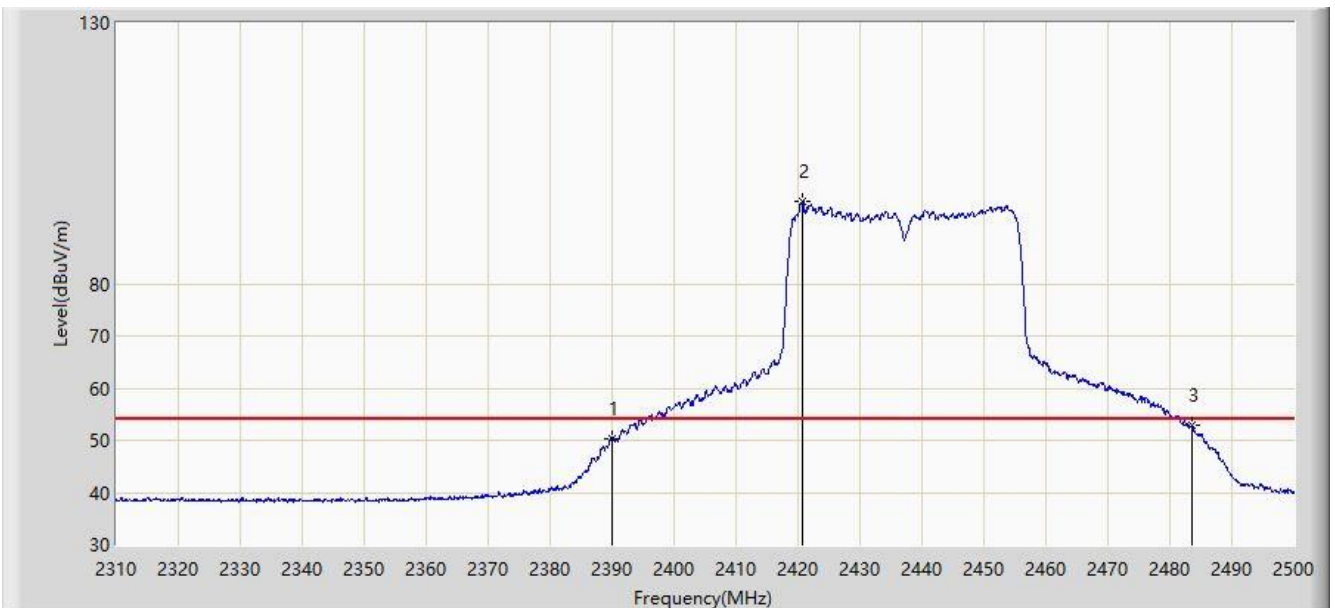

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	50.344	52.186	-3.656	54.000	-1.842	AV
2		*	2420.770	95.800	97.753	N/A	N/A	-1.953	AV
3			2483.500	52.950	55.027	-1.050	54.000	-2.077	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

aSite: AC1	Time: 2019/02/21 - 22:01
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AC1300 MU-MIMO 迷你 USB 無線網卡	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11-VHT40 at Channel 2437MHz, Ant 0 + 1	




No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2389.040	59.092	60.931	-14.908	74.000	-1.839	PK
2			2390.000	55.594	57.436	-18.406	74.000	-1.842	PK
3		*	2449.840	99.588	101.643	N/A	N/A	-2.055	PK
4			2483.500	60.506	62.583	-13.494	74.000	-2.077	PK
5			2485.940	60.865	62.942	-13.135	74.000	-2.077	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

aSite: AC1	Time: 2019/02/21 - 22:02
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AC1300 MU-MIMO 迷你 USB 無線網卡	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11-VHT40 at Channel 2437MHz, Ant 0 + 1	

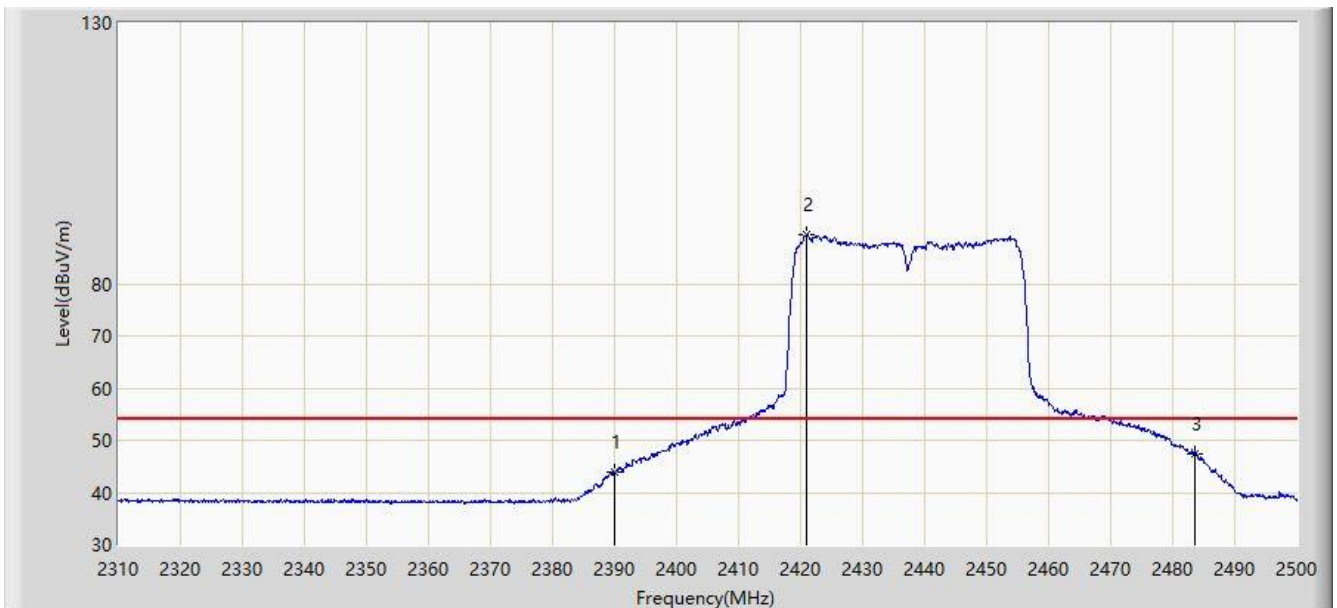


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	43.947	45.789	-10.053	54.000	-1.842	AV
2		*	2420.960	89.495	91.449	N/A	N/A	-1.954	AV
3			2483.500	47.502	49.579	-6.498	54.000	-2.077	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/02/28 - 04:25
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AC1300 MU-MIMO 迷你 USB 無線網卡	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11-VHT40 at Channel 2447MHz, Ant 0 + 1	

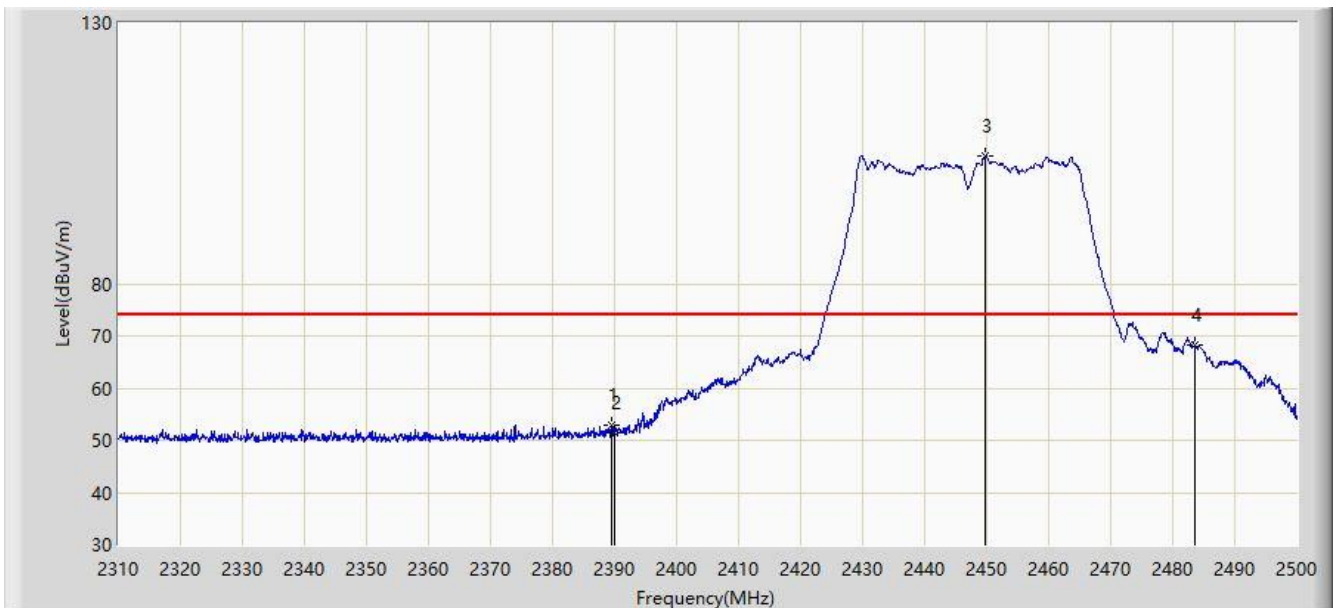


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2389.610	52.880	54.721	-21.120	74.000	-1.841	PK
2			2390.000	51.544	53.386	-22.456	74.000	-1.842	PK
3		*	2449.745	104.460	106.515	N/A	N/A	-2.055	PK
4			2483.500	68.280	70.357	-5.720	74.000	-2.077	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/02/28 - 04:24
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AC1300 MU-MIMO 迷你 USB 無線網卡	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11-VHT40 at Channel 2447MHz, Ant 0 + 1	

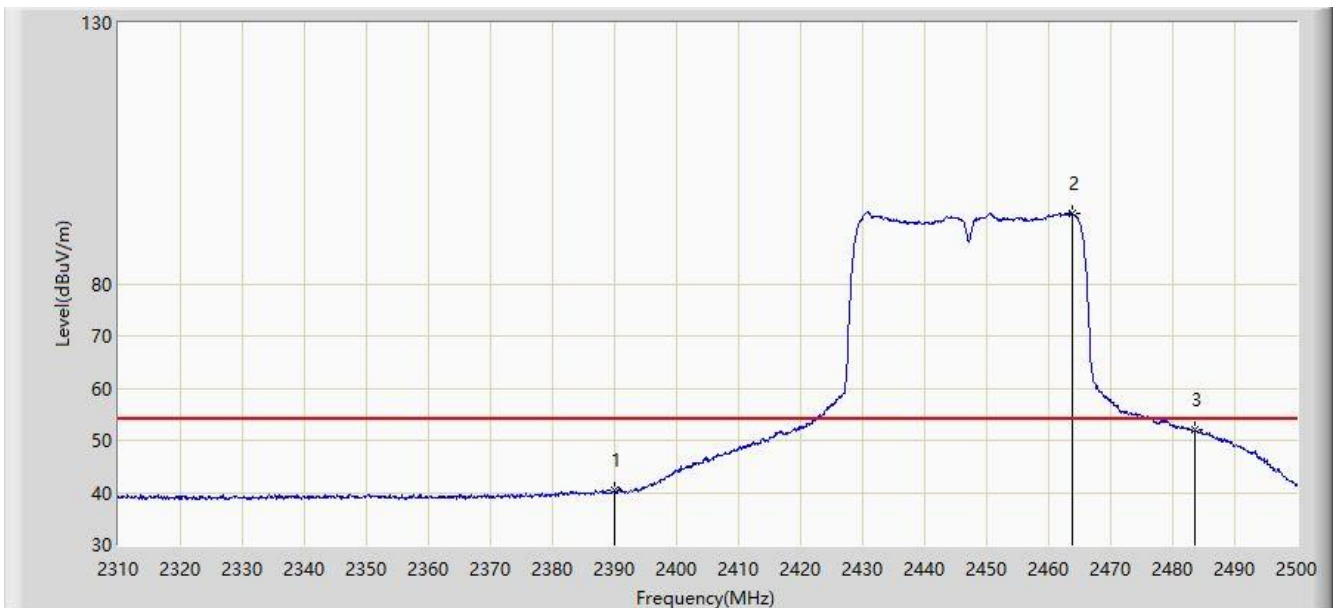


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	40.297	42.139	-13.703	54.000	-1.842	AV
2		*	2463.805	93.565	95.638	N/A	N/A	-2.073	AV
3			2483.500	51.933	54.010	-2.067	54.000	-2.077	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/02/28 - 04:26
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AC1300 MU-MIMO 迷你 USB 無線網卡	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11-VHT40 at Channel 2447MHz, Ant 0 + 1	

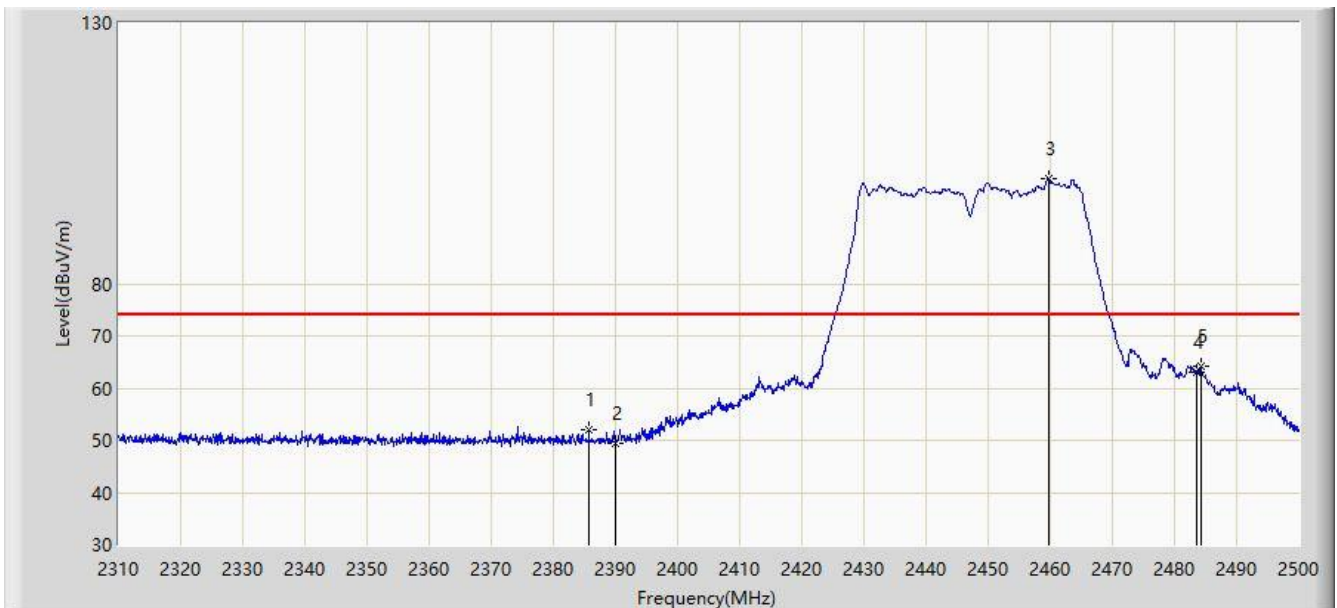


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2385.715	52.141	53.971	-21.859	74.000	-1.830	PK
2			2390.000	49.449	51.291	-24.551	74.000	-1.842	PK
3		*	2459.720	100.047	102.116	N/A	N/A	-2.068	PK
4			2483.500	63.062	65.139	-10.938	74.000	-2.077	PK
5			2484.230	64.224	66.301	-9.776	74.000	-2.077	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/02/28 - 04:27
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AC1300 MU-MIMO 迷你 USB 無線網卡	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11-VHT40 at Channel 2447MHz, Ant 0 + 1	

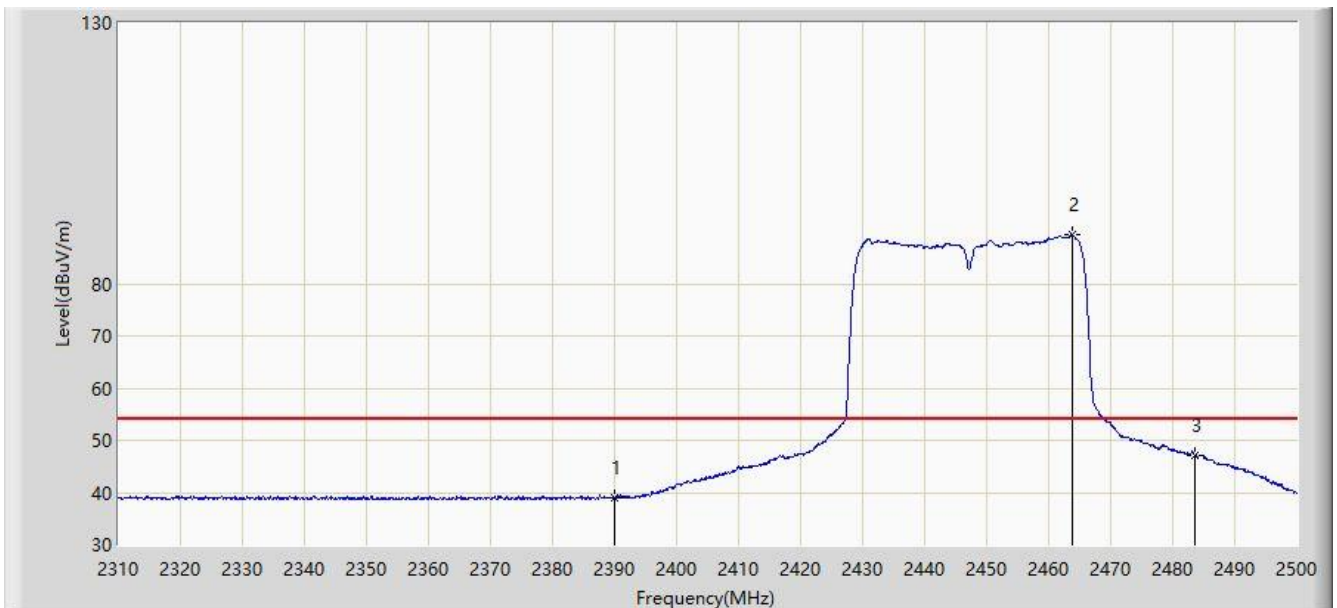


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	38.950	40.792	-15.050	54.000	-1.842	AV
2		*	2463.805	89.302	91.375	N/A	N/A	-2.073	AV
3			2483.500	47.213	49.290	-6.787	54.000	-2.077	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/02/21 - 22:10
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AC1300 MU-MIMO 迷你 USB 無線網卡	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11-VHT40 at Channel 2452MHz, Ant 0 + 1	

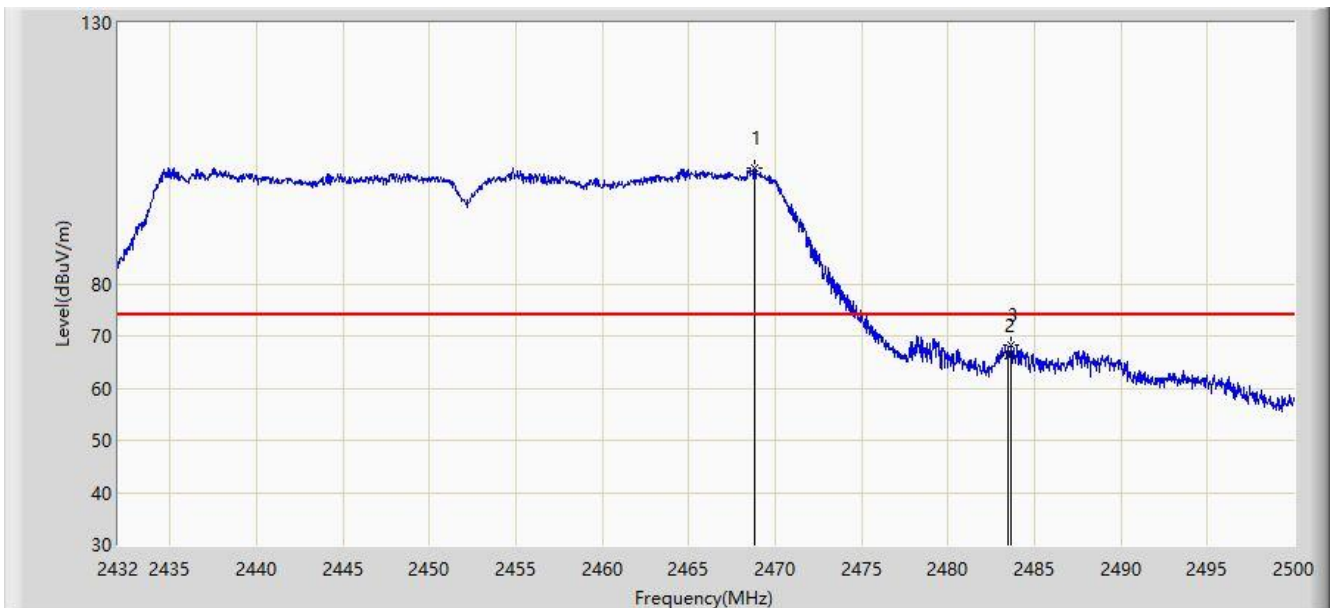


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2468.788	102.168	104.242	N/A	N/A	-2.074	PK
2			2483.500	66.224	68.301	-7.776	74.000	-2.077	PK
3			2483.612	68.156	70.233	-5.844	74.000	-2.077	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/02/21 - 22:10
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AC1300 MU-MIMO 迷你 USB 無線網卡	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11-VHT40 at Channel 2452MHz, Ant 0 + 1	

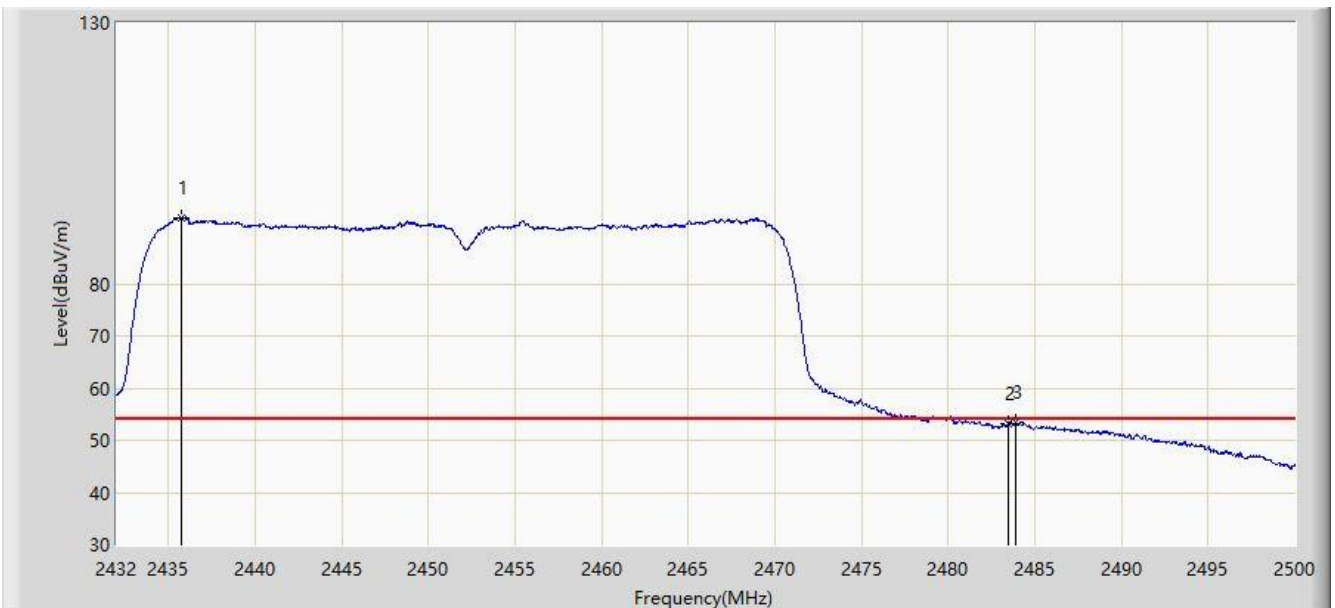


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2435.774	92.593	94.606	N/A	N/A	-2.013	AV
2			2483.500	53.191	55.268	-0.809	54.000	-2.077	AV
3			2483.918	53.471	55.548	-0.529	54.000	-2.077	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

aSite: AC1	Time: 2019/02/21 - 22:12
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AC1300 MU-MIMO 迷你 USB 無線網卡	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11-VHT40 at Channel 2452MHz, Ant 0 + 1	

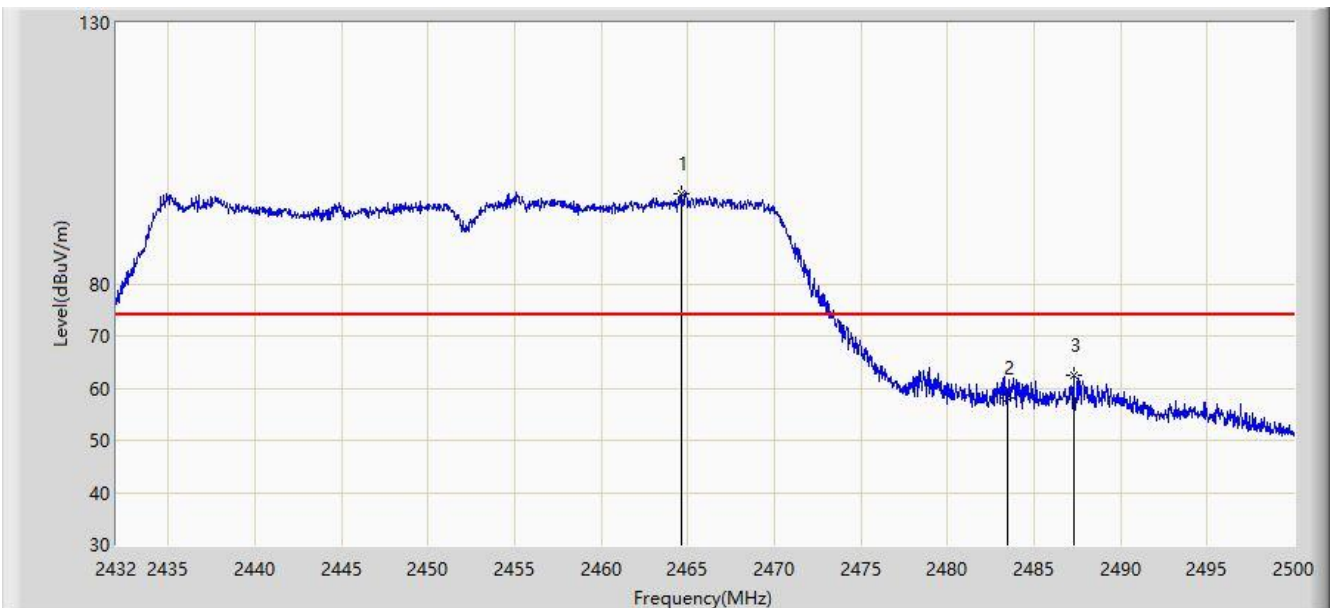


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2464.606	97.287	99.360	N/A	N/A	-2.073	PK
2			2483.500	58.069	60.146	-15.931	74.000	-2.077	PK
3			2487.284	62.601	64.678	-11.399	74.000	-2.077	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/02/21 - 22:13
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AC1300 MU-MIMO 迷你 USB 無線網卡	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11-VHT40 at Channel 2452MHz, Ant 0 + 1	

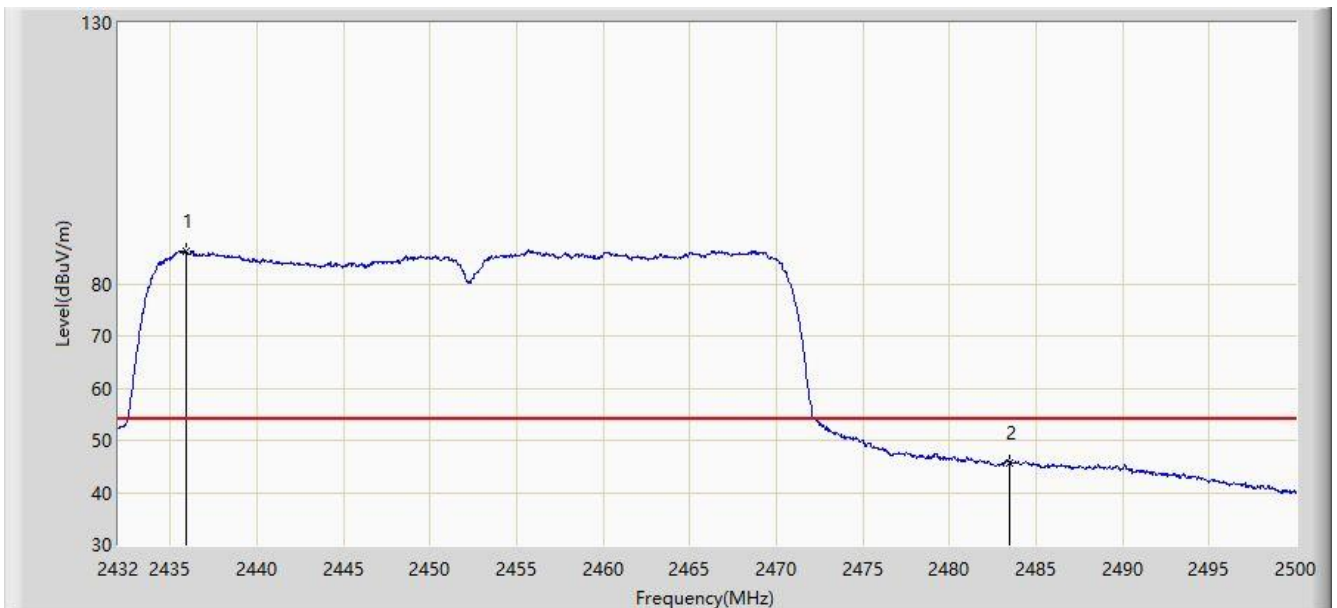

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2435.910	86.115	88.128	N/A	N/A	-2.014	AV
2			2483.500	45.769	47.846	-8.231	54.000	-2.077	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

5.7. 佔用頻道寬度

5.7.1. 適用標準


依據國家通訊傳播委員會低功率射頻電機技術規範之第 3.10.1.6(2)(A)節之要求，6dB 頻寬至少應有 500kHz。

5.7.2. 量測方法

待測物之天線埠經由適當之衰減直接連至頻譜分析儀 RF 輸入端，設定頻譜分析儀之解析度頻寬為 100kHz，視訊頻寬不小於解析度頻寬，頻率掃瞄範圍(SPAN)遠大於解析度頻寬。

待測物應在正常發射狀態下量測。

5.7.3. 測試架構圖

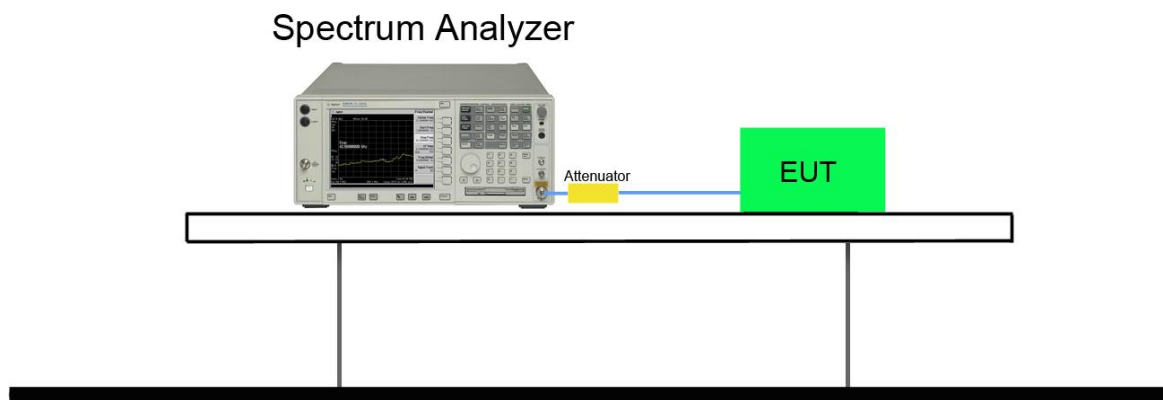

5.7.4. 佔用頻帶寬度測試結果

待測物名稱	AC1300 MU-MIMO 迷你 USB 無線網卡	溫度	23°C
測試工程師	Kevin Ker	濕度	54%
測試場地	SR2	測試日期	2019/03/03

Test Mode	Data Rate / MCS	Channel No.	Frequency (MHz)	6dB Bandwidth (MHz)	Limit (MHz)	Result
802.11b	1Mbps	01	2412	9.57	≥ 0.5	Pass
802.11b	1Mbps	06	2437	9.57	≥ 0.5	Pass
802.11b	1Mbps	11	2462	10.02	≥ 0.5	Pass
802.11g	6Mbps	01	2412	16.37	≥ 0.5	Pass
802.11g	6Mbps	06	2437	16.35	≥ 0.5	Pass
802.11g	6Mbps	11	2462	16.36	≥ 0.5	Pass
802.11n-HT20	MCS8	01	2412	17.11	≥ 0.5	Pass
802.11n-HT20	MCS8	06	2437	17.15	≥ 0.5	Pass
802.11n-HT20	MCS8	11	2462	17.16	≥ 0.5	Pass
802.11n-HT40	MCS8	03	2422	36.37	≥ 0.5	Pass
802.11n-HT40	MCS8	06	2437	36.36	≥ 0.5	Pass
802.11n-HT40	MCS8	09	2452	36.37	≥ 0.5	Pass
802.11-VHT20	MCS0	01	2412	17.07	≥ 0.5	Pass
802.11-VHT20	MCS0	06	2437	17.15	≥ 0.5	Pass
802.11-VHT20	MCS0	11	2462	17.08	≥ 0.5	Pass
802.11-VHT40	MCS0	03	2422	36.37	≥ 0.5	Pass
802.11-VHT40	MCS0	06	2437	36.34	≥ 0.5	Pass
802.11-VHT40	MCS0	09	2452	36.13	≥ 0.5	Pass

802.11b 6dB Bandwidth - Ant 0

Channel 01 (2412MHz)



Channel 06 (2437MHz)



Channel 11 (2462MHz)



802.11g 6dB Bandwidth - Ant 0

Channel 01 (2412MHz)



Channel 06 (2437MHz)



Channel 11 (2462MHz)



802.11n-HT20 6dB Bandwidth - Ant 0 / Ant 0 + 1

Channel 01 (2412MHz)



Channel 06 (2437MHz)




Channel 11 (2462MHz)




802.11n-HT40 6dB Bandwidth - Ant 0 / Ant 0 + 1

Channel 03 (2422MHz)

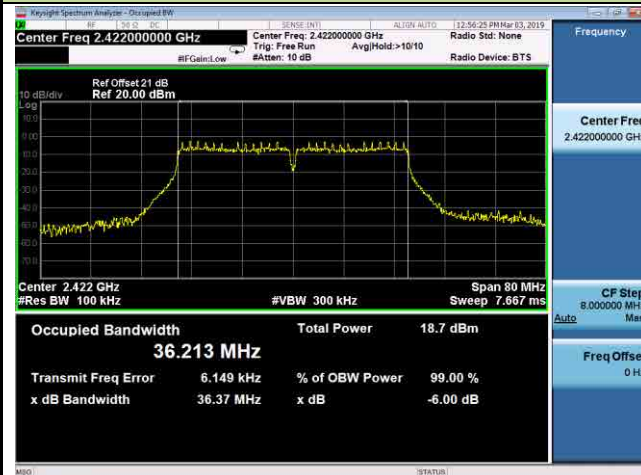

Channel 06 (2437MHz)

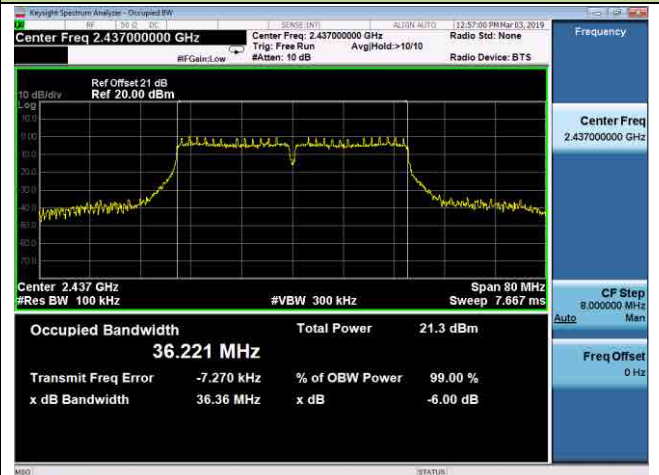


Channel 09 (2452MHz)




802.11-VHT20 6dB Bandwidth - Ant 0 / Ant 0 + 1

Channel 01 (2412MHz)

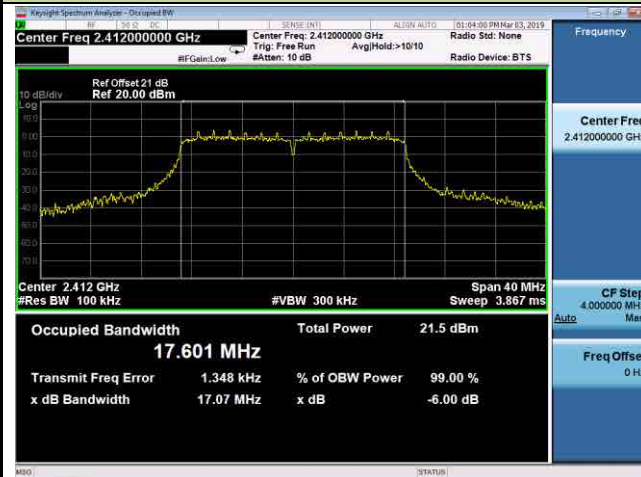

Channel 06 (2437MHz)

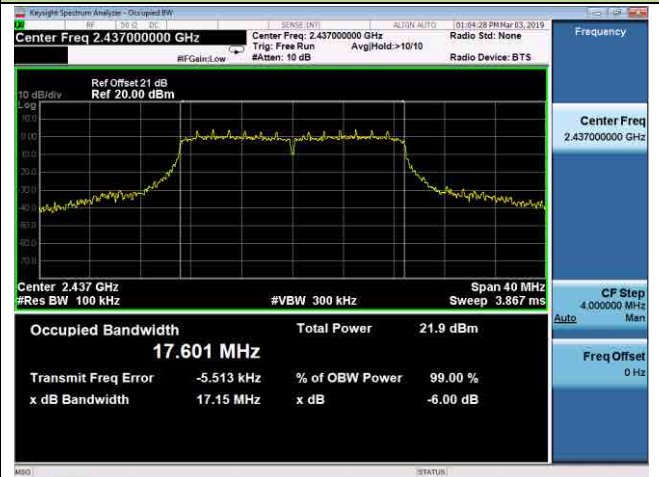


Channel 11 (2462MHz)




802.11-VHT40 6dB Bandwidth - Ant 0 / Ant 0 + 1

Channel 03 (2422MHz)

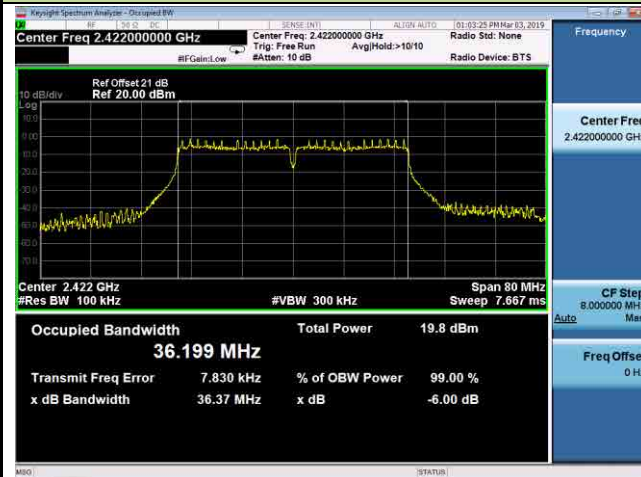

Channel 06 (2437MHz)

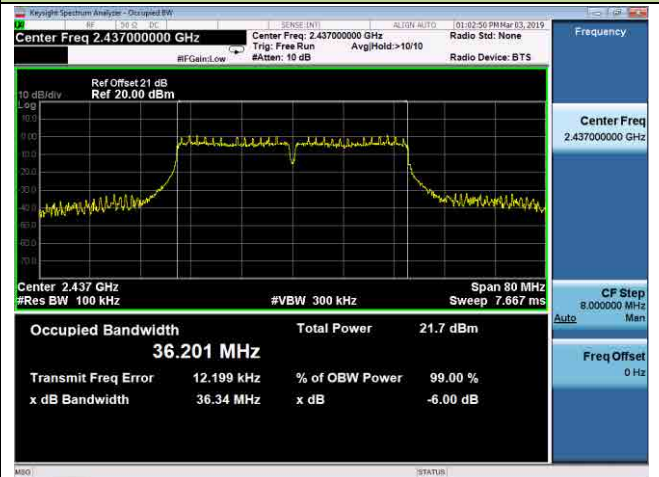

Channel 09 (2452MHz)



5.8. 發射電功率密度

5.8.1. 適用標準


依據國家通訊傳播委員會低功率射頻電機技術規範之第 3.10.1.6(2)(B)節，在使用頻率範圍之任意 3 千赫(kHz)頻寬內，由發射機傳導至天線之峰值發射電功率密度在任意期間內，皆不得大於 8dBm。

5.8.2. 量測方法

待測物之天線埠經由適當之衰減直接連至頻譜分析儀 RF 輸入端。找出發射峰值並擴展於通帶內，設定頻譜分析儀之解析度頻寬為 3kHz，視訊頻寬大於解析度頻寬，掃瞄時間為頻率掃瞄範圍除以 3kHz。(SWEEP TIME = SPAN/3kHz)。

待測物應在正常發射狀態下量測。

5.8.3. 測試架構圖

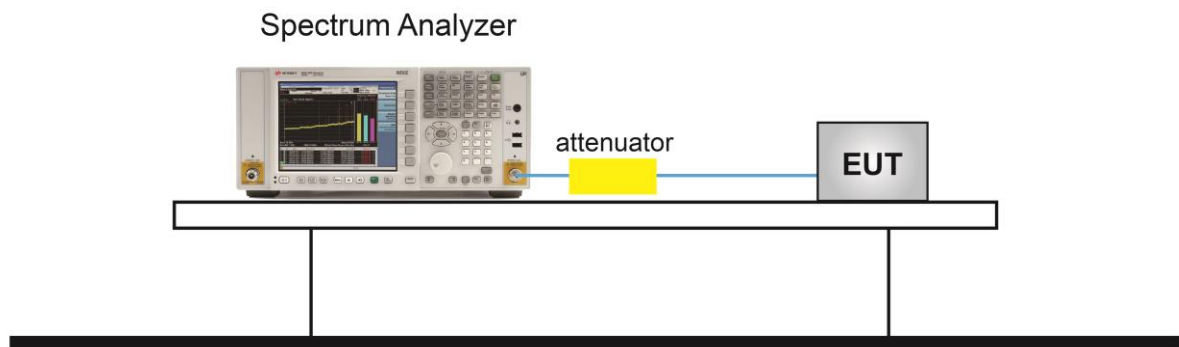

5.8.4. 功率密度量測結果

待測物名稱	AC1300 MU-MIMO 迷你 USB 無線網卡	溫度	23°C
測試工程師	Kevin Ker	濕度	54%
測試場地	SR2	測試日期	2019/03/03

Test Mode	Data Rate/ MCS	Channel No.	Freq. (MHz)	Ant 0 PSD (dBm/ 10kHz)	Ant 1 PSD (dBm/ 10kHz)	Duty Cycle (%)	Constant Factor (dBm)	Total PSD (dBm/ 3kHz)	Limit (dBm/ 3kHz)	Result
802.11b	1Mbps	01	2412	-9.56	N/A	99.08	-5.23	-14.79	≤ 8.00	Pass
802.11b	1Mbps	06	2437	-9.17	N/A	99.08	-5.23	-14.40	≤ 8.00	Pass
802.11b	1Mbps	11	2462	-9.84	N/A	99.08	-5.23	-15.07	≤ 8.00	Pass
802.11g	6Mbps	01	2412	-13.55	N/A	95.87	-5.23	-18.78	≤ 8.00	Pass
802.11g	6Mbps	06	2437	-10.43	N/A	95.87	-5.23	-15.66	≤ 8.00	Pass
802.11g	6Mbps	11	2462	-12.59	N/A	95.87	-5.23	-17.82	≤ 8.00	Pass
802.11n-HT20	MCS8	01	2412	-13.74	-13.04	95.40	-5.23	-15.39	≤ 8.00	Pass
802.11n-HT20	MCS8	06	2437	-13.03	-12.81	95.40	-5.23	-14.93	≤ 8.00	Pass
802.11n-HT20	MCS8	11	2462	-14.44	-13.92	95.40	-5.23	-16.19	≤ 8.00	Pass
802.11n-HT40	MCS8	03	2422	-18.40	-18.59	91.53	-5.23	-20.33	≤ 8.00	Pass
802.11n-HT40	MCS8	06	2437	-14.71	-17.37	91.53	-5.23	-17.67	≤ 8.00	Pass
802.11n-HT40	MCS8	09	2452	-19.02	-18.77	91.53	-5.23	-20.73	≤ 8.00	Pass
802.11-VHT20	MCS0	01	2412	-12.23	-12.97	95.48	-5.23	-14.60	≤ 8.00	Pass
802.11-VHT20	MCS0	06	2437	-12.67	-12.60	95.48	-5.23	-14.65	≤ 8.00	Pass
802.11-VHT20	MCS0	11	2462	-13.88	-14.73	95.48	-5.23	-16.30	≤ 8.00	Pass
802.11-VHT40	MCS0	03	2422	-19.08	-18.16	91.39	-5.23	-20.42	≤ 8.00	Pass
802.11-VHT40	MCS0	06	2437	-17.51	-16.37	91.39	-5.23	-18.73	≤ 8.00	Pass
802.11-VHT40	MCS0	09	2452	-19.07	-18.08	91.39	-5.23	-20.38	≤ 8.00	Pass

Note 1: When EUT duty cycle ≥ 98%, Total AVGPSPD = $10 \cdot \log \{10^{(\text{Ant 0 AVGPSPD}/10)} + 10^{(\text{Ant 1 AVGPSPD}/10)}\} + \text{Constant Factor}$.

Note 2: When EUT duty cycle < 98%, Total AVGPSPD = $10 \cdot \log \{10^{(\text{Ant 0 AVGPSPD}/10)} + 10^{(\text{Ant 1 AVGPSPD}/10)}\} + 10 \cdot \log (1/\text{duty cycle}) + \text{Constant Factor}$.

Note 3: PSD Limit = 8 dBm/3kHz.

802.11b AVGPSD - Ant 0

Channel 01 (2412MHz)



Channel 06 (2437MHz)




Channel 11 (2462MHz)




802.11g AVGPSD - Ant 0


Channel 01 (2412MHz)

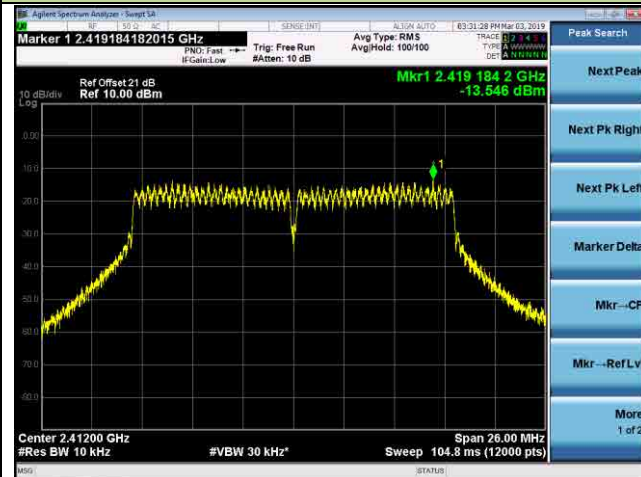

Channel 06 (2437MHz)

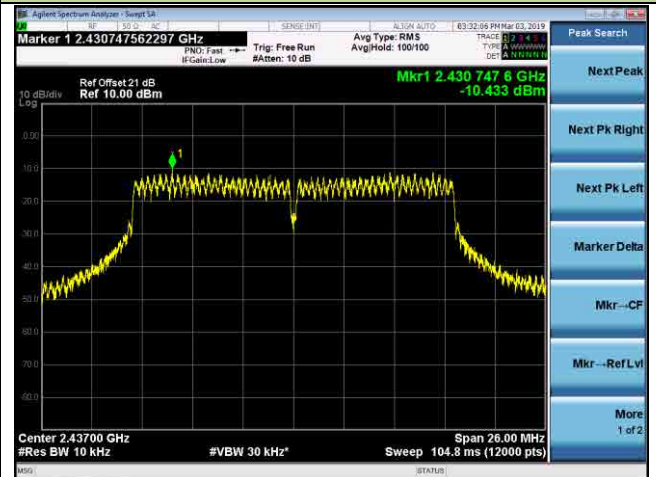


Channel 11 (2462MHz)

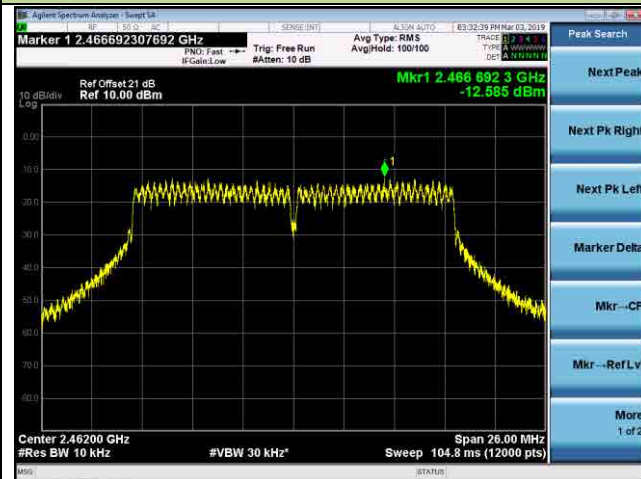

802.11n-HT20 AVGPDS - Ant 0 / Ant 0 + 1


Channel 01 (2412MHz)

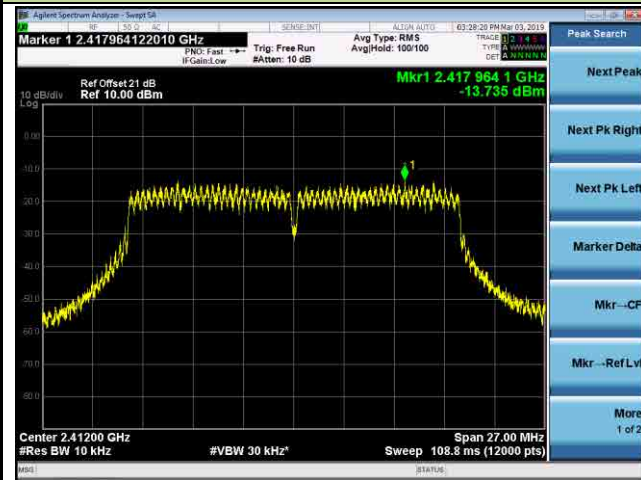

Channel 06 (2437MHz)




Channel 11 (2462MHz)

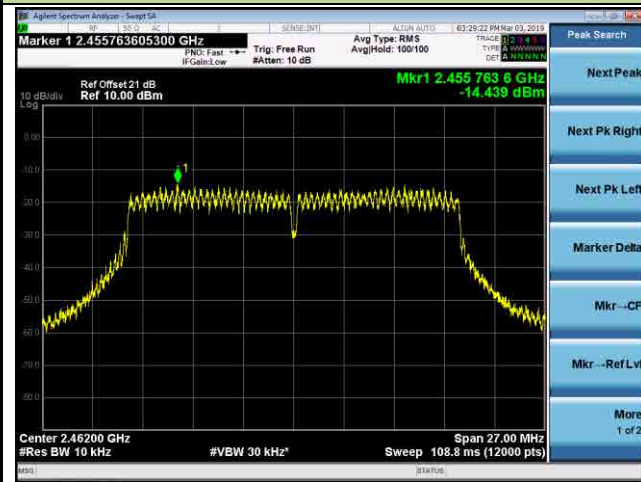


802.11n-HT40 AVGPDS - Ant 0 / Ant 0 + 1


Channel 03 (2422MHz)

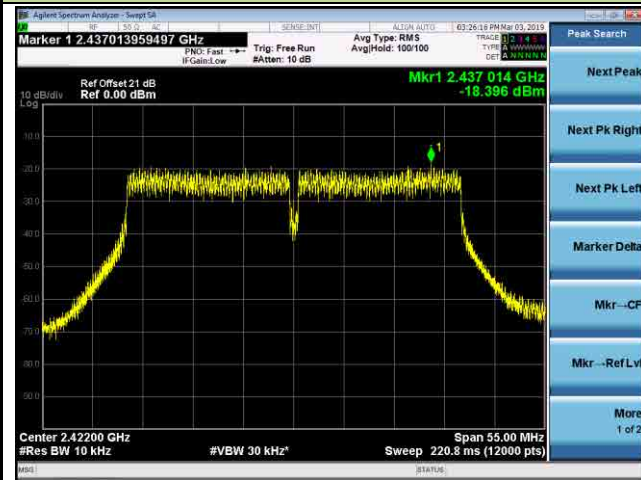

Channel 06 (2437MHz)

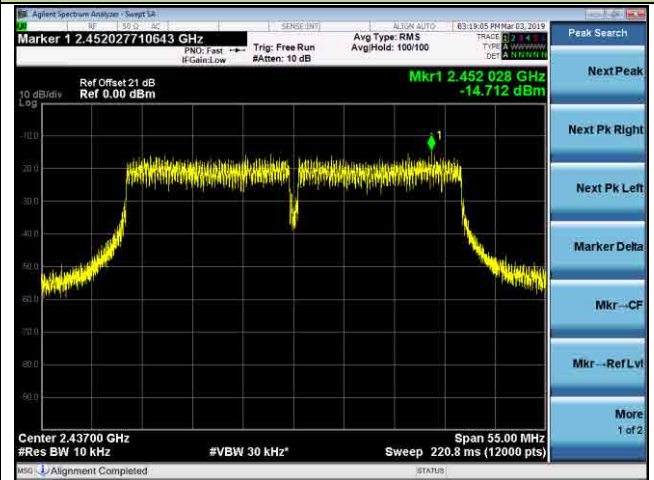


Channel 09 (2452MHz)

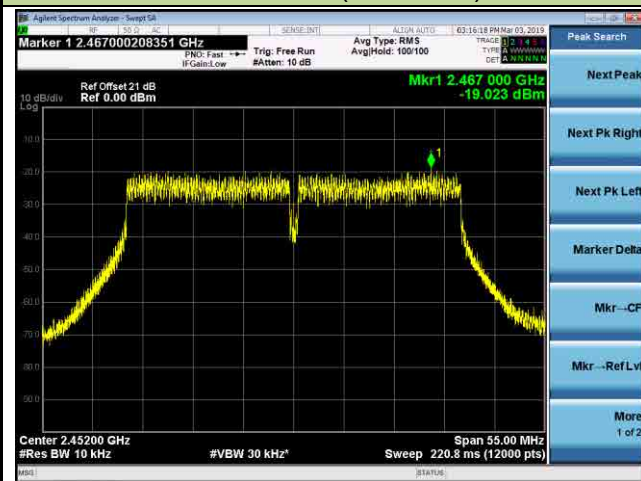

802.11-VHT20 AVGPSPD - Ant 0 / Ant 0 + 1


Channel 01 (2412MHz)

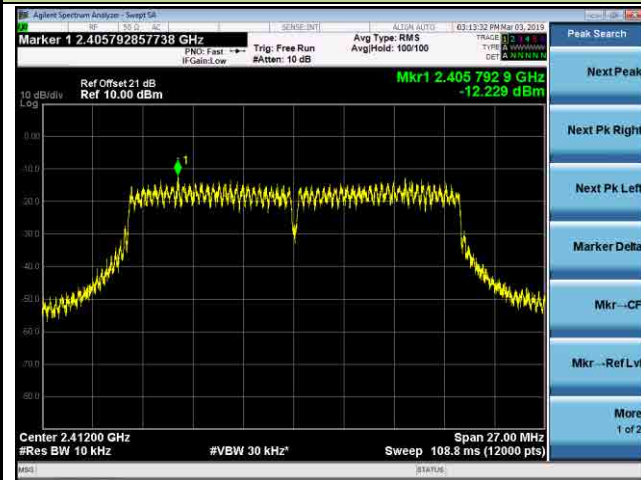

Channel 06 (2437MHz)



Channel 11 (2462MHz)

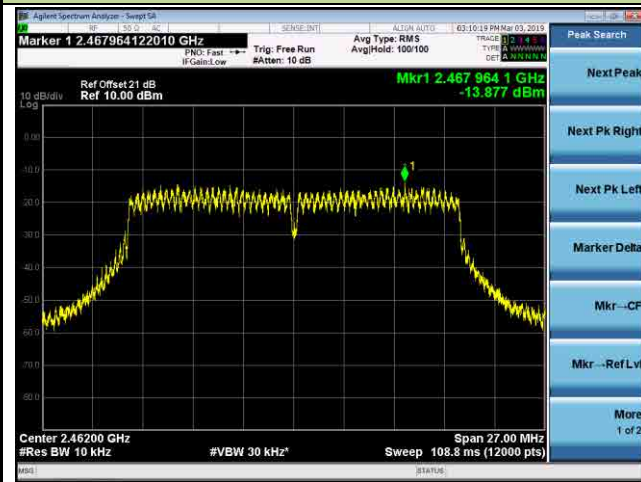


802.11-VHT40 AVGPSPD - Ant 0 / Ant 0 + 1


Channel 03 (2422MHz)



Channel 06 (2437MHz)

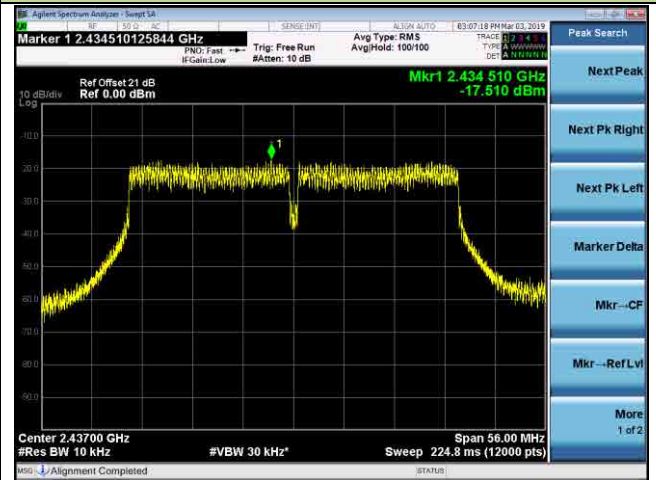


Channel 09 (2452MHz)

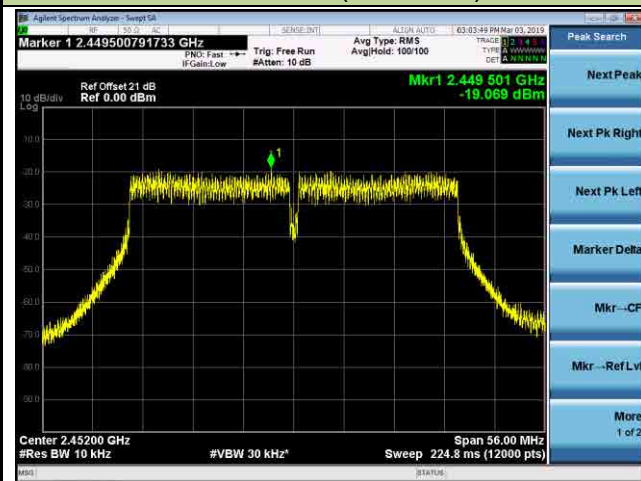

802.11n-HT20 AVGPDS - Ant 1 / Ant 0 + 1


Channel 01 (2412MHz)

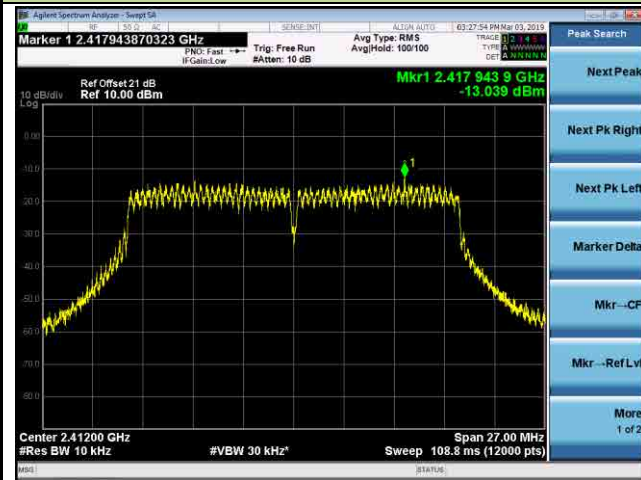

Channel 06 (2437MHz)




Channel 11 (2462MHz)

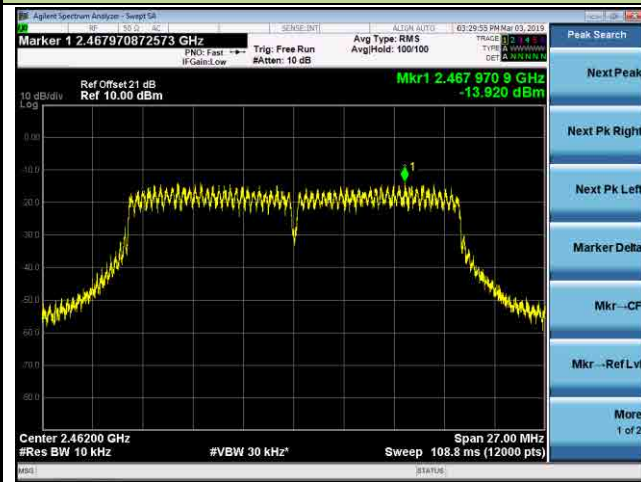


802.11n-HT40 AVGPDS - Ant 1 / Ant 0 + 1


Channel 03 (2422MHz)

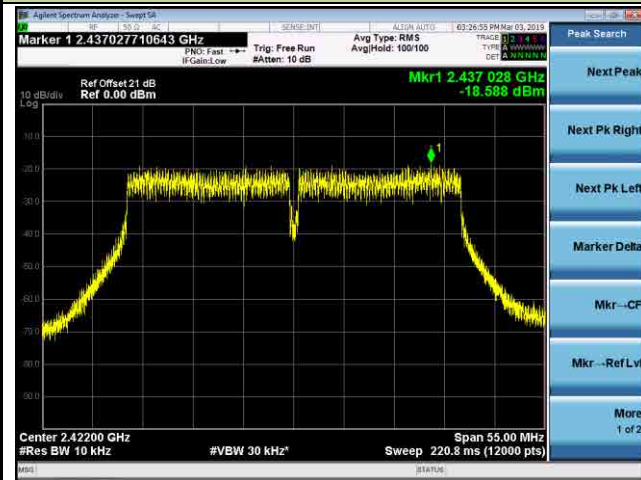

Channel 06 (2437MHz)

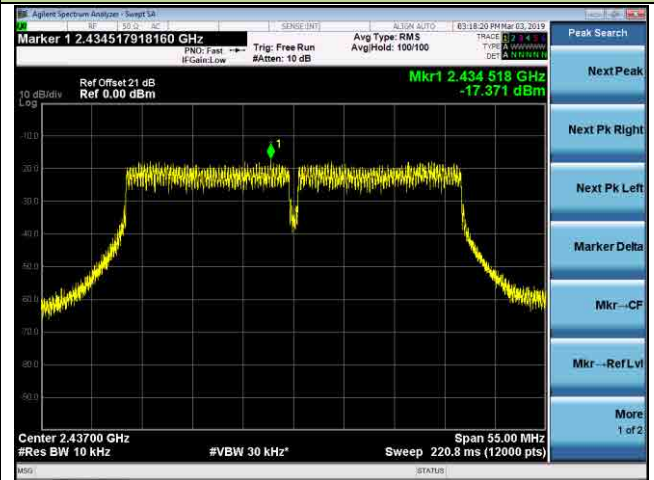


Channel 09 (2452MHz)

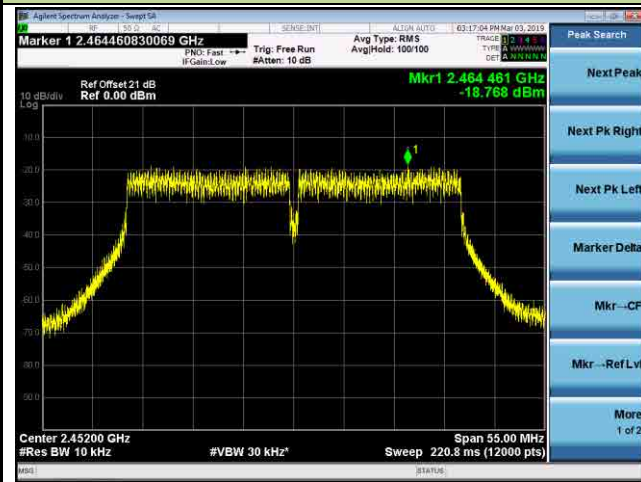


802.11-VHT20 AVGPSPD - Ant 1 / Ant 0 + 1


Channel 01 (2412MHz)

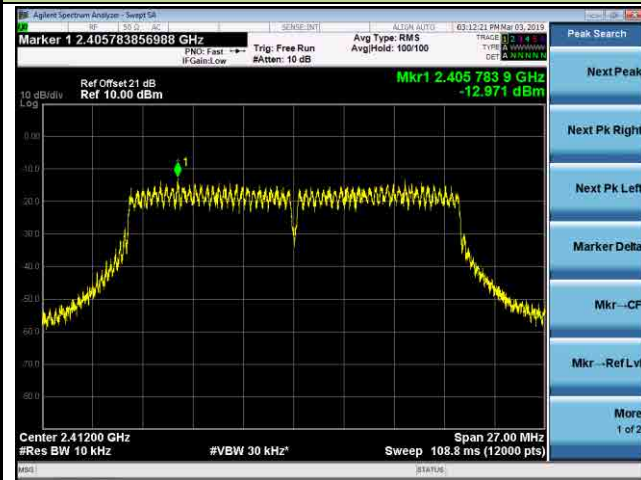

Channel 06 (2437MHz)

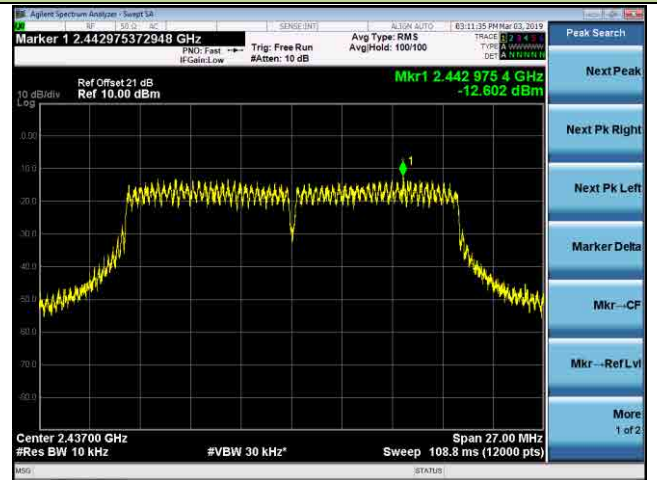


Channel 11 (2462MHz)

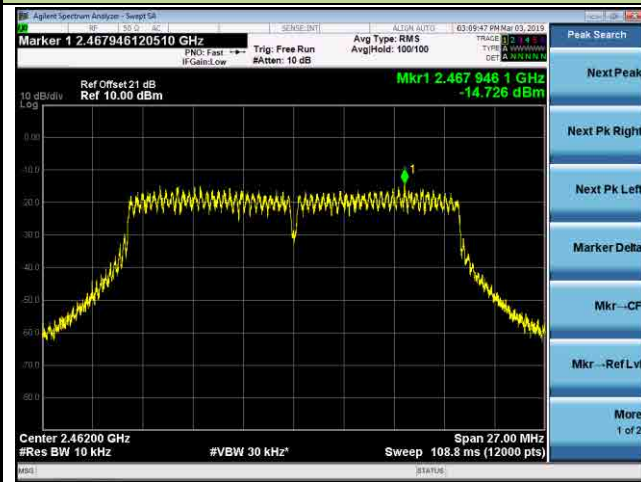


802.11-VHT40 AVGPSPD - Ant 1 / Ant 0 + 1


Channel 03 (2422MHz)

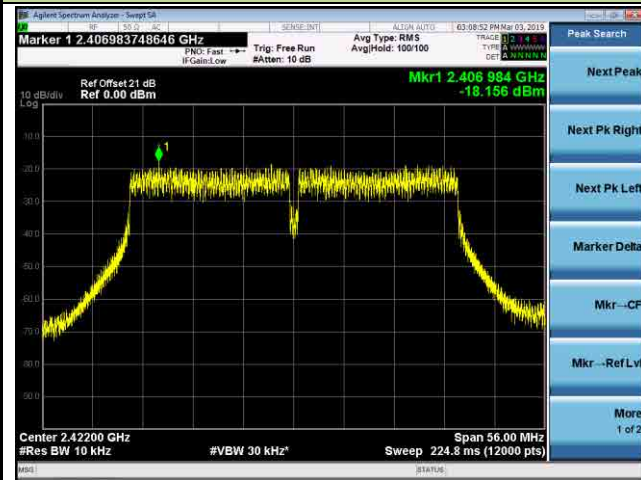

Channel 06 (2437MHz)

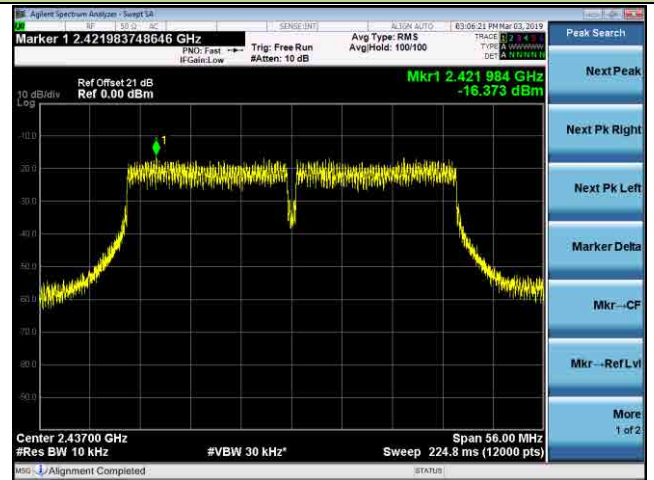

Channel 09 (2452MHz)

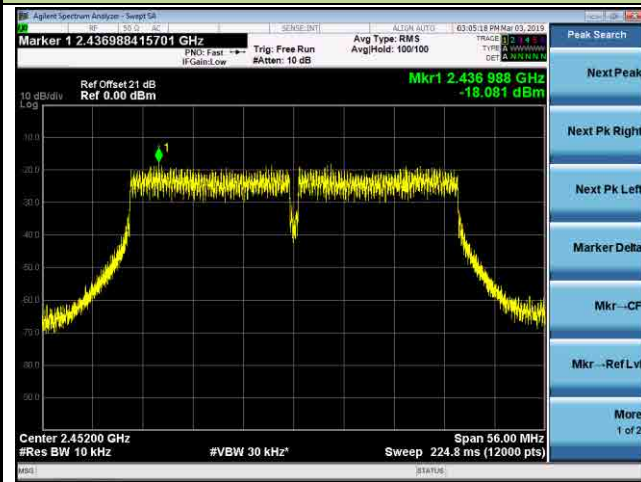

The End