

Japan Radio Test Report

Project No. : 2606H010
Equipment : Floor Cleaning Robot
Brand Name : ECOVACS
Model Name : ZJ2570
Applicant : Ecovacs Home Service Robotics Co., Ltd.
Address : No.518 Songwei Road,Wusongjiang industry Park,Guoxiang Street,
Wuzhong District,Suzhou, Jiangsu,China.
Manufacturer : Ecovacs Home Service Robotics Co., Ltd.
Address : No.518 Songwei Road,Wusongjiang industry Park,Guoxiang Street,
Wuzhong District,Suzhou, Jiangsu,China.
Factory1 : Ecovacs Robotics Co., Ltd.
Address1 : No.518 Songwei Road,Wusongjiang industry Park,Guoxiang Street,
Wuzhong District,Suzhou, Jiangsu,China.
Factory2 : Ecovacs Home Service Robotics Co., Ltd.
Address2 : No.518 Songwei Road,Wusongjiang industry Park,Guoxiang Street,
Wuzhong District,Suzhou, Jiangsu,China.
Date of Receipt : Jun. 03, 2026
Date of Test : Jun. 04, 2026~Jul. 02, 2026
Issued Date : Jul. 10, 2026
Test Sample : Engineering Sample No.: SH920260603387
Standard(s) : Ordinance Regulating Radio Equipment General Provisions,
Transmitting Equipment, Receiving Equipment, Article 49-20
Test Procedure : Test Method Specified Radio Equipment Article 2 Paragraph 1 of
item19-2 (MIC Notice No.88 Appendix No.44)

The above equipment has been tested and found compliance with the requirement of the relative standards by BTL Inc. (Shanghai)

Grani Zhou

Prepared by : Grani Zhou

Riley Wei

Approved by : Riley Wei

Add: No. 29, Jintang Road, Tangzhen Industry Park, Pudong New Area, Shanghai 201210, China.

Tel: +86-021-61765666

Web: www.newbtl.com

Service mail: btl_qa@newbtl.com

Declaration

BTL represents to the client that testing is done in accordance with standard procedures as applicable and that test instruments used has been calibrated with standards traceable to international standard(s) and/or national standard(s).

BTL's reports apply only to the specific samples tested under conditions. It is manufacturer's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. BTL assumes no responsibility for the data provided by the customer, any statements, inferences or generalizations drawn by the customer or others from the reports issued by BTL.

This report is the confidential property of the client. As a mutual protection to the clients, the public and ourselves, the test report shall not be reproduced, except in full, without our written approval.

BTL is not responsible for the sampling stage, so the results only apply to the sample as received.

The information, data and test plan are provided by manufacturer which may affect the validity of results, so it is manufacturer's responsibility to ensure that the apparatus meets the essential requirements of applied standards and in all the possible configurations as representative of its intended use.

Limitation

For the use of the authority's logo is limited unless the Test Standard(s)/Scope(s)/Item(s) mentioned in this test report is (are) included in the conformity assessment authorities acceptance respective.

Please note that the measurement uncertainty is provided for informational purpose only and are not use in determining the Pass/Fail results.

Table of Contents	page
REVISION HISTORY	4
1 . SUMMARY OF TEST RESULTS	5
1.1. TEST FACILITY	6
1.2. MEASUREMENT UNCERTAINTY	6
1.3. TEST ENVIRONMENT CONDITIONS	6
2 . GENERAL INFORMATION	7
2.1. GENERAL DESCRIPTION OF EUT	7
2.2. DESCRIPTION OF TEST MODES	9
2.3. BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	11
2.4. DESCRIPTION OF SUPPORT UNITS	11
2.5. TABLE FOR PARAMETERS OF TEST SOFTWARE SETTING	12
3 . TEST RESULTS	13
3.1. FREQUENCY TOLERANCE MEASUREMENT	13
3.2. OCCUPIED BANDWIDTH AND SPREAD-SPECTRUM BANDWIDTH MEASUREMENT	15
3.3. UNWANTED EMISSION INTENSITY MEASUREMENT	16
3.4. ANTENNA POWER TOLERANCE MEASUREMENT	18
3.5. LIMITATION OF COLLATERAL EMISSION OF RECEIVER MEASUREMENT	20
3.6. TRANSMISSION ANTENNA GAIN (EIRP ANTENNA POWER) MEASUREMENT	22
3.7. RADIO INTERFERENCE PREVENTION CAPABILITY MEASUREMENT	24
3.8. CARRIER SENSE CAPABILITY MEASUREMENT	25
3.9. CONSTRUCTION PROTECTION CONFIRMATION METHOD	27
4 . LIST OF MEASURING EQUIPMENTS	28
5 . EUT TEST PHOTO	29
APPENDIX A - FREQUENCY TOLERANCE	30
APPENDIX B - OCCUPIED BANDWIDTH AND SPREAD-SPECTRUM BANDWIDTH	32
APPENDIX C - UNWANTED EMISSION INTENSITY	34
APPENDIX D - ANTENNA POWER TOLERANCE	36
APPENDIX E - LIMITATION OF COLLATERAL EMISSION OF RECEIVER	38

REVISION HISTORY

Report No.	Version	Description	Issued Date	Note
BTL-JPAP-2-2606H010	R00	Original Report.	Jul. 10, 2026	Valid

1. SUMMARY OF TEST RESULTS

Part	Description of Test	Rule Section	Result
3.1	Frequency Tolerance	Article 5, Table 1	Pass
3.2	Occupied Bandwidth (99%) / Spread-spectrum Bandwidth (90%) / Spreading Factor (diffusion rate)	Article 6, Table 2 & Article 49-20, Item1-h & 1-i	Pass
3.3	Unwanted Emission Intensity	Article 7, Table 3	Pass
3.4	Antenna Power Tolerance	Article 14	Pass
3.5	Limitation of Collateral Emission of Receiver	Article 24, Paragraph 2	Pass
3.6	Transmission Antenna Gain (EIRP Antenna Power)	Article 49-20, Item 1-e & 1-f	Pass
3.7	Radio Interference Prevention Capability	Article 9-4, Item 9-C Article 6-2, Item 3 of the Regulation for Enforcement of the Radio Law	Good
3.8	Carrier Sense Capability	Article 49-20, Item1-k	N/A
3.9	Construction Protection Confirmation	Article 49-20, Item1-a	Pass

Method of measurement:	MIC Notice No.88 Appendix No.44
Test condition:	Conductive, RF test program provided by the customer was used to control the operating channel as well as the output power level.

Abbreviations used in this test report are as follows:

NC:	Normal Condition
EC:	Extreme Condition
EUT:	Equipment Under Test
DS:	Direct spreading
FH:	Frequency hopping
OFDM:	Orthogonal frequency division multiplexing

1.1. TEST FACILITY

The test facilities used to collect the test data in this report:

TR02: No. 29, Jintang Road, Tangzhen Industry Park, Pudong New Area, Shanghai 201210, China.

1.2. MEASUREMENT UNCERTAINTY

Test Items	Uncertainty
Frequency Tolerance	± 0.1536 Hz
Antenna Power	± 0.3473 dB
Occupied Bandwidth	$\pm 0.07\%$
Unwanted Emission Strength	± 0.3792 dB
Adjacent Channel Emitted Power	± 0.6052 dB
Temperature	$\pm 0.3^{\circ}\text{C}$
Humidity	$\pm 1.3\%$
Voltage	± 0.7 v

1.3. TEST ENVIRONMENT CONDITIONS

Test Item	Temperature	Humidity	Test Voltage	Tested By
Frequency Tolerance	21°C	43%	DC 14.4V	Argenti Liu
Occupied Bandwidth (99%) / Spread-spectrum Bandwidth (90%)/ Spreading Factor (diffusion rate)	21°C	43%	DC 14.4V	Argenti Liu
Unwanted Emission Intensity	21°C	43%	DC 14.4V	Argenti Liu
Antenna Power Tolerance	21°C	43%	DC 14.4V	Argenti Liu
Limitation of Collateral Emission of Receiver	21°C	43%	DC 14.4V	Argenti Liu
Carrier Sense Capability	21°C	43%	DC 14.4V	Argenti Liu

2. GENERAL INFORMATION

2.1. GENERAL DESCRIPTION OF EUT

Equipment	Floor Cleaning Robot
Brand Name	ECOVACS
Test Model	ZJ2570
Model Name	ZJ2570
Model Difference(s)	N/A
Hardware Version	N/A
Software Version	N/A
Power Source	DC voltage supplied from AC/DC adapter Brand/ Model: ECOVACS/CH2619 Battery supplied. Model: S38-LI-144-4000(E10)
Power Rating	Station Rated Input :220V~240V ~ 50-60Hz 0.5A Station Nominal Rated Output:18V --- 2A Fast Charge Output (Short time) :16.4V --- 10.5A Rated Input Current(Charging):220-240V ~ 50-60Hz 1.5A 400W (Emptying) 120W (Hot Water Washing Mop) 70W (Dirty Water Tank Heating) Nominal Voltage: 14.4V Max Charge Voltage: 16.6V Nominal Capacity: 4000mAh Rated Capacity:3600mAh Rated Energy:51.84Wh
Operation Frequency	2484 MHz
Modulation Technology	IEEE 802.11b: DSSS
Bit Rate of Transmitter	IEEE 802.11b: 11/5.5/2/1Mbps
Occupied Bandwidth	19.64 MHz
Spreading Bandwidth	14.18 MHz
Antenna Power (Rated Power)	7.00 mW/MHz
Antenna Power (Max. Conducted Power)	6.5766 mW/MHz

Note:

1. The above EUT information is declared by manufacturer and for more detailed features description, please refers to the manufacturer's specifications or user's manual.

2. Channel List:

CH14 For IEEE 802.11b	
Channel	Frequency (MHz)
14	2484

3. Table for Filed Antenna:

Ant.	Brand	Model Name	Antenna Type	Connector	Gain(dBi)
1	FN-LINK TECHNOLOGY Ltd.	N/A	FPC	IPEX	0.8

- (3) The antenna gain is provided by the manufacturer.

2.2. DESCRIPTION OF TEST MODES

The EUT was tested while in a continuous transmitter / receiver mode.


The EUT was tuned to a middle channel for all tests.

The EUT continuously transmitted a modulated packet with payload, while transmitting the EUT was setup to operate at the intended maximum power output available to the end user.

For all test case pre/scans were completed in all modes to determine worst case levels.

Test Mode	Description
Mode 1	IEEE 802.11b/CH14

Power Supply Voltage Fluctuation Test



Voltage Fluctuation Test	Normal Voltage	High Voltage + 10% of Normal Voltage	Low Voltage - 10% of Normal Voltage
Input: DC Power	14.4V	15.84V	12.96V
Output: DC Power	3.28V	3.28V	3.28V
Voltage Variation (%)	--	0	0

Measurement point



Note:


Voltage Variation (%)

$$= (\text{Output High Voltage or Low Voltage} - \text{Output Normal Voltage}) / \text{Output Normal Voltage} * 100$$

During the input supply voltage to the EUT from the external power source is varied by +/- 10%, if output voltage had been confirmed that the fluctuation of power supply to the RF circuit of EUT (excluding power source) is equal to or less than +/- 1%.

Exempt extremely high and low supply voltage condition tests, EUT only operated in normal voltage to test all regulations.

2.3. BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

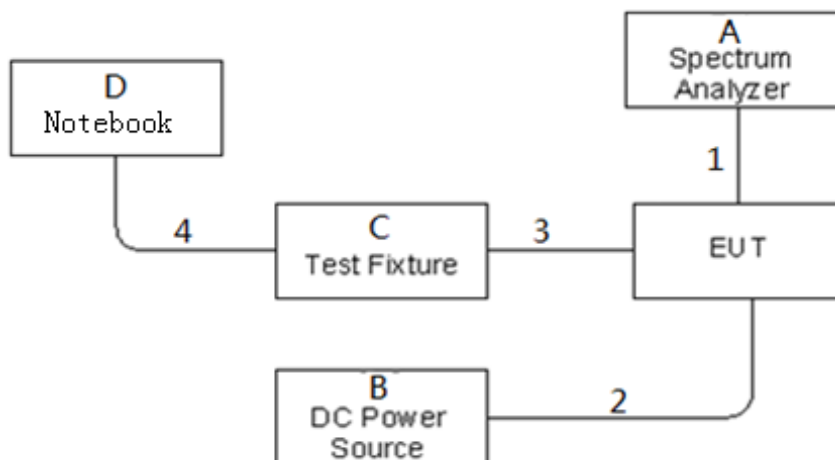

2.4. DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.
A	EXA Spectrum Analyzer	Keysight	N9020B	MY57120173
B	DC Power Supply	GW INSTEK	GPC-3030DN	EH897352
C	Test Fixture	N/A	N/A	N/A
D	PC	DELL	N/A	N/A

Item	Cable Type	Shielded Type	Ferrite Core	Length
1	RF CABLE	YES	NO	0.1m
2	DC POWER CABLE	YES	NO	1.2m
3	CONTROL CABLE	NO	NO	0.1m
4	USB CABLE	NO	NO	1.1m

2.5. TABLE FOR PARAMETERS OF TEST SOFTWARE SETTING

During testing, Channel & Power Controlling Software provided by the customer was used to control the operating channel as well as the output power level.

Test Software Version	IPOP V4.0
Frequency(MHz)	2484
IEEE 802.11b	Default

3. TEST RESULTS

3.1. FREQUENCY TOLERANCE MEASUREMENT

3.1.1 LIMIT

Item	Limits (See Article 5, Table1 of the Ordinance Regulating Radio Equipment)
Frequency Tolerance	-50≤ppm≤50

3.1.2. SETTING

The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Span	20 MHz
RBW / VBW	10 kHz / 30 kHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

3.1.3. TEST PROCEDURES

Test method which surpass to Clause 3 of Annex No.44 of MIC Notification No.88.

1. Frequency accuracy of SA shall be less than 10% of limits tolerance (5ppm).
2. Set spectrum analyzer with condition in section 3.1.2 and tune reference level to observe receiving signal position.
3. Center Frequency: The center frequency of testing for EUT.
4. EUT have transmitted modulation signal and fixed channelize. The peak value of the power envelope shall be measured and noted. The span shall be reduced and the marker moved in a positive frequency increment until the upper, (relative to the centre frequency), -10 dBc point is reached. This value shall be noted as f1. The marker shall then be moved in a negative frequency increment until the lower, (relative to the centre frequency), -10 dBc point is reached. This value shall be noted as f2. f is calculated as $(f1 + f2) / 2$, fc is declaring of channel frequency. Then the frequency error formula is $(fc-f)/fc \times 10^6$ ppm and the limit is less than ±50ppm.

3.1.4. TEST SETUP LAYOUT



3.1.5. TEST DEVIATION

There is no deviation with the original standard.

3.1.6. EUT OPERATION DURING TEST

The EUT was programmed to be in modulation mode.

3.1.7. TEST RESULTS

Please refer to the Appendix A.

3.2. OCCUPIED BANDWIDTH AND SPREAD-SPECTRUM BANDWIDTH MEASUREMENT

3.2.1 LIMIT

Item	Limits (See Article 6, Table2 and Article 49-20, Item1-h,i of the Ordinance Regulating Radio Equipment)
Occupied Bandwidth	OFDM, DSSS≤26MHz
Spreading Bandwidth	≥500 kHz (FHSS, DSSS)
Spreading Factor	≥10, Operating Frequency 2471~2497MHz

3.2.2. SETTING

The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Span	50MHz
RBW / VBW	300kHz / 300kHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

3.2.3. TEST PROCEDURES

Test method which surpass to Clause 4 of Annex No.44 of MIC Notification No.88.

1. Set spectrum analyzer with condition in section 3.2.2 and tune reference level to observe receiving signal position.
2. EUT have transmitted the maximum modulation signal and fixed channelize (For DSSS or OFDM Device) or continuous maximum power of hopping mode (For FHSS Device). SA set to 99% of occupied bandwidth to measure occupied bandwidth. The limit is less than 26MHz.
3. SA set to 90% of occupied bandwidth to measure Spread Spectrum Bandwidth and must greater than 500 kHz.
4. Spreading Spectrum Factor = Spreading Spectrum Bandwidth / modulation rate of EUT.
5. Spreading Spectrum Factor limit is greater than 10.

3.2.4. TEST SETUP LAYOUT



3.2.5. TEST DEVIATION

There is no deviation with the original standard.

3.2.6. EUT OPERATION DURING TEST

The EUT was programmed to be in continuously transmitting mode.

3.2.7. TEST RESULTS

Please refer to the Appendix B.

3.3. UNWANTED EMISSION INTENSITY MEASUREMENT

3.3.1. LIMIT

Item	Limits
	(See Article 7, Table 3 of the Ordinance Regulating Radio Equipment)
TX Spurious Emission	$\leq 2.5 \mu\text{W}/\text{MHz}$ ($30\text{MHz} \leq f \leq 1000\text{MHz}$)
	$\leq 2.5 \mu\text{W}/\text{MHz}$ ($1000\text{MHz} \leq f < 2458\text{MHz}$; $2510\text{MHz} < f$)
	$\leq 25 \mu\text{W}/\text{MHz}$ ($2458\text{MHz} \leq f < 2471\text{MHz}$) and ($2497\text{MHz} < f \leq 2510\text{MHz}$)
Measurement range: 30MHz~5th harmonics	

3.3.2. SETTING

The following table is the setting of spectrum analyzer.

Spectrum Parameter	Setting
RBW / VBW	100kHz / 100kHz (30~1000MHz) 1MHz / 1MHz (Above 1000MHz)
Detector	Positive Peak
Trace	Max Hold
Sweep Time	Auto

3.3.3. TEST PROCEDURES

Test method which surpass to Clause 5 of Annex No.44 of MIC Notification No.88.

1. Set spectrum analyzer with condition in section 3.3.2 and tune reference level to observe receiving signal position.
2. SA adjusted to start frequency 30MHz and stop frequency 1000MHz. Then to mark peak reading value + cable loss shall be less than $2.5\mu\text{W}/\text{MHz}$.
3. SA adjusted to start frequency 1000MHz and stop frequency 2458MHz. Then to mark peak reading value + cable loss shall be less than $2.5\mu\text{W}/\text{MHz}$.
4. SA adjusted to start frequency 2458MHz and stop frequency 2471MHz. Then to mark peak reading value + cable loss shall be less than $25\mu\text{W}/\text{MHz}$.
5. SA adjusted to start frequency 2497MHz and stop frequency 2510MHz. Then to mark peak reading value + cable loss shall be less than $25\mu\text{W}/\text{MHz}$.
6. SA adjusted to start frequency 2510MHz and stop frequency 12500MHz. Then to mark peak reading value + cable loss shall be less than $2.5\mu\text{W}/\text{MHz}$.
7. If the Result_Value is over the requirement, take total sum of 1MHz band centered at the spur frequency like time domain power measurement as Result_Value.

3.3.4. TEST SETUP LAYOUT



3.3.5. TEST DEVIATION

There is no deviation with the original standard.

3.3.6. EUT OPERATION DURING TEST

The EUT was programmed to be in continuously transmitting mode.

Note:

- ※ 1: Frequency Band 1 ($30\text{MHz} \leq f \leq 1000\text{MHz}$)
- ※ 2: Frequency Band 2 ($1000\text{MHz} \leq f < 2458\text{MHz}$)
- ※ 3: Frequency Band 3 ($2458\text{MHz} \leq f < 2471\text{MHz}$)
- ※ 4: Frequency Band 4 ($2497\text{MHz} < f \leq 2510\text{MHz}$)
- ※ 5: Frequency Band 5 ($2510\text{MHz} < f$)

Cable Loss(dB)	11.5
----------------	------

3.3.7. TEST RESULTS

Please refer to the Appendix C.

3.4. ANTENNA POWER TOLERANCE MEASUREMENT

3.4.1. LIMIT

Item	Limits
	(See Article 14 and 49-20 Item1-e of the Ordinance Regulating Radio Equipment)
Antenna Power Density	$\leq 10\text{mW/MHz}$ (DSSS 2471~2497MHz)
Antenna Power Tolerance	+20%, -80% (Base on manufacturer declare antenna power density)

3.4.2. SETTING

The following table is the setting of the spectrum analyzer.

Step 1:

Spectrum Parameter	Setting
Span	50MHz
RBW / VBW	1MHz / 3MHz
Detector	Positive Peak
Trace	Max Hold
Sweep Time	Auto

Step 3:


Spectrum Parameter	Setting
Span	0MHz
RBW / VBW	1MHz / 1MHz
Detector	Positive Peak
Trace	Max Hold
Sweep Time	60s

3.4.3. TEST PROCEDURES

Test method which surpass to Clause 6 of Annex No.44 of MIC Notification No.88.

1. Set spectrum analyzer with condition in section 3.4.2 Step 1 and tune reference level to observe receiving signal position.
2. When the trace is complete, find the peak value of the power envelope and record the frequency.
3. Set spectrum analyzer with condition in section 3.4.2 Step 3 and tune reference level to observe receiving signal position.
4. Connect the high frequency power meter to the IF output terminal of the spectrum analyzer, measure the equivalent noise bandwidth at the resolution bandwidth of 1 MHz of the spectrum analyzer, correct the bandwidth to the 1 MHz equivalent bandwidth, and read the displayed value from the high frequency power meter.

3.4.4. TEST SETUP LAYOUT

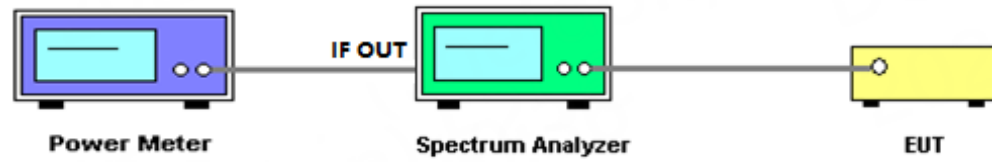

3.4.5. TEST DEVIATION

There is no deviation with the original standard.

3.4.6. EUT OPERATION DURING TEST

The EUT was programmed to be in continuously transmitting mode.

3.4.7. TEST RESULTS

Please refer to the Appendix D.

3.5. LIMITATION OF COLLATERAL EMISSION OF RECEIVER MEASUREMENT

3.5.1. LIMIT

Item	Limits
	(See Article 24, Paragraph 2 of the Ordinance Regulating Radio Equipment)
RX Spurious Emission	$\leq 4 \text{ nW } (-54 \text{ dBm}) (f < 1\text{GHz})$
	$\leq 20 \text{ nW } (-47 \text{ dBm}) (1\text{GHz} \leq f)$
Measurement range: 30MHz~5th harmonics	

3.5.2. SETTING

The following table is the setting of spectrum analyzer.


Spectrum Parameter	Setting
RBW / VBW	100kHz / 100kHz (30~1000MHz)
	1 MHz / 1 MHz (Above 1000MHz)
Detector	Positive Peak
Trace	Max Hold
Sweep Time	Auto

3.5.3. TEST PROCEDURES

Test method which surpass to Clause 7 of Annex No.44 of MIC Notification No.88.

1. EUT have the continuous reception mode and fixed only one channelize.
2. Set spectrum analyzer with condition in section 3.5.2 and tune reference level to observe receiving signal position.
3. SA set RBW: 100kHz and VBW: 100kHz. Then adjust to start frequency 30MHz and stop frequency 1000MHz. Search to mark peak reading value + cable loss shall be less than 4nW.
4. SA set RBW: 1MHz and VBW: 1MHz. Then adjust to start frequency 1000MHz and stop frequency 12500MHz. Search to mark peak reading value + cable loss shall be less than 20nW.
5. If power level of lower emissions are more than 1/10 of limit (0.4nW for $f < 1\text{GHz}$, 2nW for $f \geq 1\text{GHz}$), all those are to be indicated in the 2nd and 3rd lines. If others are 1/10 or less more of the limit, no necessary to be indicated.

3.5.4. TEST SETUP LAYOUT

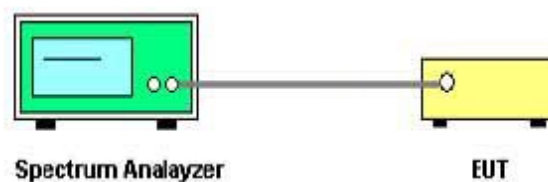

3.5.5. TEST DEVIATION

There is no deviation with the original standard.

3.5.6. EUT OPERATION DURING TEST

The EUT was programmed to be in continuously receiving mode.

Note:

- ※ 6: Frequency Band 6 ($f < 1\text{GHz}$)
- ※ 7: Frequency Band 7 ($1\text{GHz} \leq f$)

Cable Loss(dB)	11.5
----------------	------

3.5.7. TEST RESULTS

Please refer to the Appendix E.

3.6. TRANSMISSION ANTENNA GAIN (EIRP ANTENNA POWER) MEASUREMENT

3.6.1. LIMIT

Item	Limits	
	(See Article 49-20, Item1-f of the Ordinance Regulating Radio Equipment)	
EIRP Power Density	☒	For an Omni-directional antenna: ≤12.14dBm/MHz (OFDM, DSSS 2471~2497MHz)
	☐	For a directional antenna: ≤22.14dBm/MHz (OFDM, DSSS 2471~2497MHz)

3.6.2. SETTING

The following table is the setting of spectrum analyzer.


Spectrum Parameter	Setting
Span	0Hz
RBW / VBW	1MHz / 1MHz
Detector	Positive Peak
Trace	Max Hold
Sweep Time	60s

3.6.3. TEST PROCEDURES


Please refer to 3.4.3 and the $ERP = \text{Power Density} + \text{Gain} - 2.15\text{dB}$.

3.6.4. TEST SETUP LAYOUT

For EUT radiation measurement

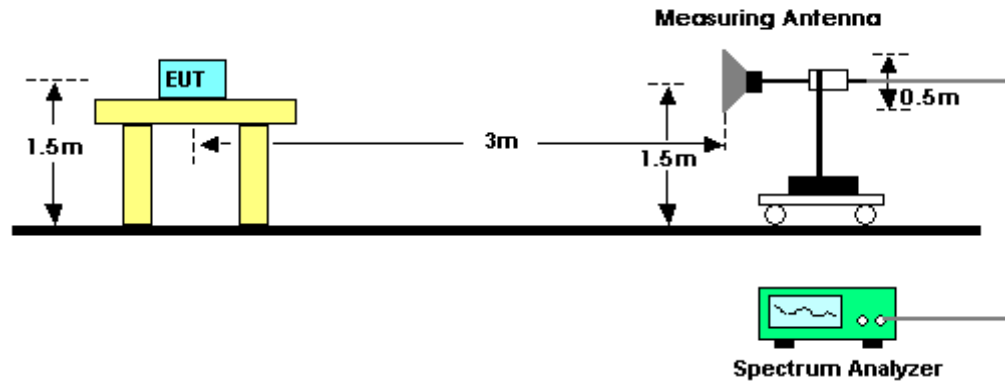

For standard antenna measurement

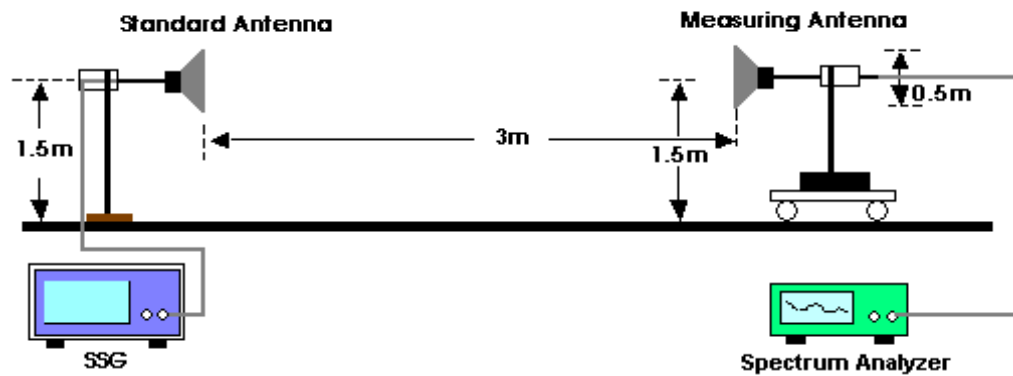

3.6.5. TEST DEVIATION

There is no deviation with the original standard.

3.6.6. EUT OPERATION DURING TEST

The EUT was programmed to be in continuously transmitting mode.

3.6.7. TEST RESULT OF TRANSMISSION ANTENNA GAIN (EIRP ANTENNA POWER)

Method of measurement:	See MIC Notice No.88 Appendix No.44 Clause 18
Results:	Please refer to the Appendix D.

3.7. RADIO INTERFERENCE PREVENTION CAPABILITY MEASUREMENT

3.7.1. LIMIT

Item	Limits (See Article 9-4, Item9-C of the Ordinance Regulating Radio Equipment)
Identification code	The wireless equipment of the radio station mainly used in the same station automatically sends or receives the identification code.

3.7.2. MEASURING ID CODE SOFTWARE


PC with Net Tool	Setting
MAC IP List	MAC Scan

3.7.3. TEST PROCEDURES

Test method which surpass to Clause 20 of Annex No.44 of MIC Notification No.88.

1. In the case that the EUT has the function of automatically transmitting the identification code:
 - a. Transmit the predetermined identification codes form EUT.
 - b. Check the transmitted identification codes with the demodulator.
2. In the case of receiving the identification code:
 - a. Transmit the predetermined identification codes form the counterpart.
 - b. Check if communication is normal.
 - c. Transmit the signals other than predetermined ID codes form the counterpart.
 - d. Check if the EUT stops the transmission, or if it displays that idnetification codes are different from the predetermined ones.

3.7.4. TEST SETUP LAYOUT

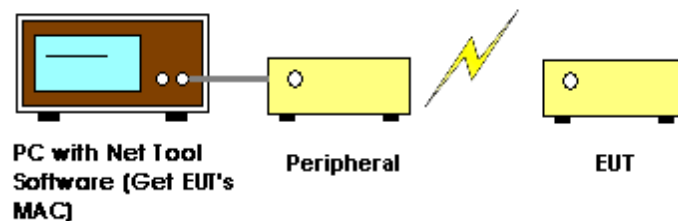

3.7.5. TEST DEVIATION

There is no deviation with the original standard.

3.7.6. EUT OPERATION DURING TEST

The EUT was programmed to be in normal mode.

3.7.7. TEST RESULT OF RADIO INTERFERENCE PREVENTION CAPABILIT

Test Power:	Normal Voltage
Test Mode:	IEEE 802.11b/CH14
Test Result:	Good (identification code: [B0:8C:B3:A4:24:A0])

B0:8C:B3:A4:24:A0

3.8. CARRIER SENSE CAPABILITY MEASUREMENT

3.8.1. LIMIT

Item	Limits
	(See Article 49-20, Item1-k of the Ordinance Regulating Radio Equipment)
Carrier Sense	Good – EUT stop RF transmission signal after carrier inject to EUT. (On $22.79 + Gr - 20 \cdot \log(f)$ [dBm] (Gr: dBi; f: MHz) or 100mV/m)

3.8.2. SETTING

The following table is the setting of the spectrum analyzer.


Spectrum Parameter	Setting
RBW / VBW	1 MHz / 1 MHz
Span	0 MHz
Sweep	Continuous
Detector	Peak
Trigger mode	Video

3.8.3. TEST PROCEDURES

Test method which surpass to Clause 9 of Annex No.44 of MIC Notification No.88.

1. SSG adjusted the frequency as same as the EUT transmitted signal and emitted the absence of modulation from SSG and power level is (On $22.79 + Gr - 20 \cdot \log(f)$ [dBm] (Gr: dBi; f: MHz). Then turn off the RF signal of SSG.
2. EUT have transmitted the maximum modulation signal and fixed channelize.
3. Set spectrum analyzer with condition in section 3.8.2 and tune reference level to observe receiving signal position.
4. SSG RF Signal On.
5. EUT shall be stop the transmitted any signal and SSG RF Signal Off. Then EUT will be continuous transmitted signal.

3.8.4. TEST SETUP LAYOUT

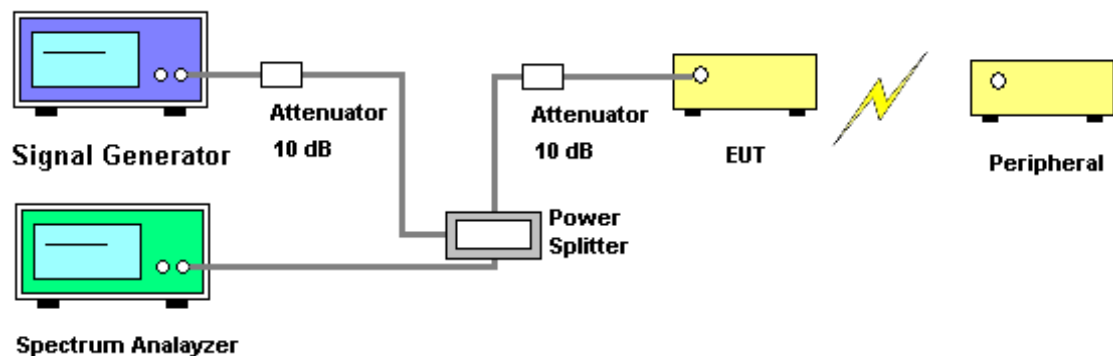

3.8.5. TEST DEVIATION

There is no deviation with the original standard.

3.8.6. EUT OPERATION DURING TEST

The EUT was programmed to be in normal transmitting mode.

3.8.7. TEST RESULT OF CARRIER SENSE CAPABILITY

Test Power	Normal Voltage
Test Mode	IEEE 802.11b/CH14
Test Result	Good

3.9. CONSTRUCTION PROTECTION CONFIRMATION METHOD

3.9.1. LIMIT


(See Article 49-20, Item1-a of the Ordinance Regulating Radio Equipment).

The high-frequency section and modulation section of the radio equipment except for the antenna system shall not be capable of being opened easily.

3.9.2. CONFIRMATION METHOD

The RF and modulation portions are protected against illegal modification as following method:

Tick the appropriate box	
☐	1. Sealed with special screws.
☐	2. Plastic chassis is being welded using ultrasonic waves.
☐	3. Chassis is glued using a special adhesive.
☐	4. Metal covers are spot-fused.
☐	5. Cover is specially interlocked.
☐	6. RF and Modulation components are covered with shielding case and this shielding case is soldered.
☐	7. Shield case is welded at RF and modulation parts, and ID-ROM is welded using the BGA Method.
☐	8. Shield case is welded at RF and modulation parts, and ID-ROM is glued at its lead with a special adhesive.
☐	9. Shield case is welded at RF and modulation parts, and ID-ROM is glued with a non-transparent laminating agent.
☒	10. RF and Modulation parts are mounted on PCB with surface mount technology, and there is no any adjustable part on PCB or adjustable parts are not exposed.

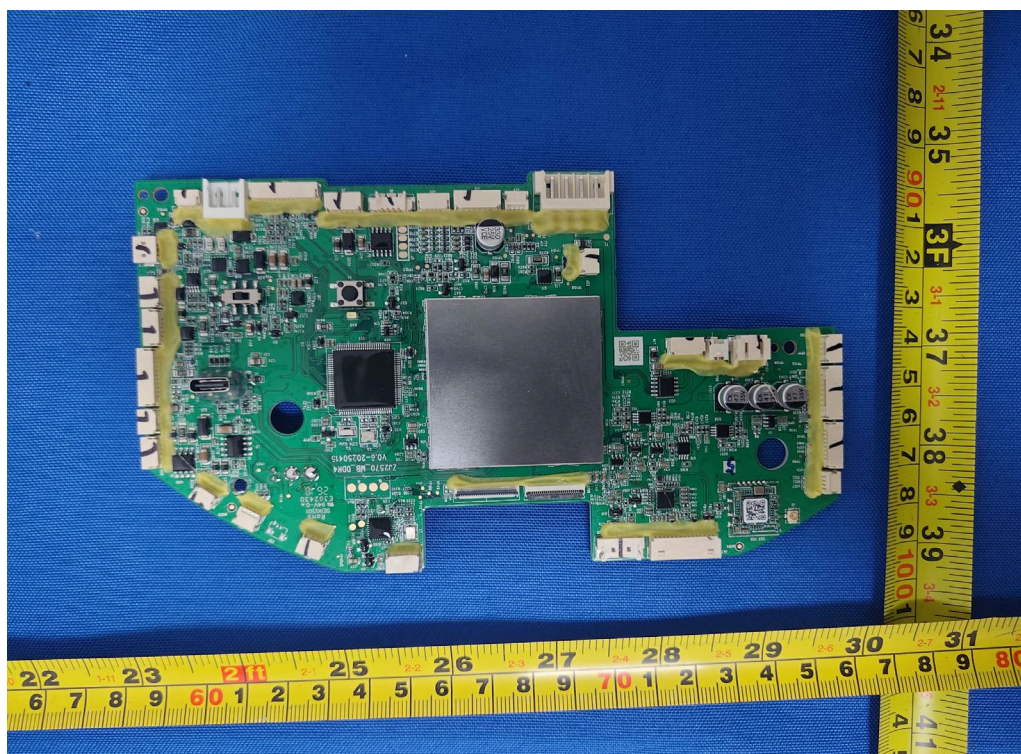

4. LIST OF MEASURING EQUIPMENTS

Kind of Equipment	Manufacturer	Model No.	Serial No.	Calibrated Date	Validity Date	Calibration Agency
Peak Power Analyzer	Keysight	8990B	MY51000507	Dec. 27, 2025	Dec. 26, 2026	China CEPREI Laboratory Calibration & Testing Centrer
MXA Spectrum Analyzer	Keysight	N9020B	MY57120173	Dec. 27, 2025	Dec. 26, 2026	China CEPREI Laboratory Calibration & Testing Centrer
BTL Conducted	BTL	20260106	N/A	N/A	N/A	N/A
EXA Spectrum Analyzer	Keysight	N9010A	MY56480559	Dec. 27, 2025	Dec. 26, 2026	China CEPREI Laboratory Calibration & Testing Centrer

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. Calibration Agency: China CEPREI Laboratory Calibration & Testing Centrer
CEPREI(Suzhou) address : No.601, Taishan Road, Hi-Tech District, Suzhou, Jiangsu, China
3. Calibration conducted in foreign countries, which is equivalent to the calibration conducted by the NICT or a designated calibration agency under Article 102-18 paragraph (1).

5. EUT TEST PHOTO




APPENDIX A - FREQUENCY TOLERANCE

Test Mode: TX Mode_IIEEE 802.11b

Test Voltage	Normal Voltage	Remarks
Test Frequency (MHz)	2484	Mid of test frequency range
Measured Frequency (MHz)	2483.9995	-
Frequency Tolerance (ppm)	-0.20	Limit: $-50 \leq \text{ppm} \leq 50$

Normal Voltage

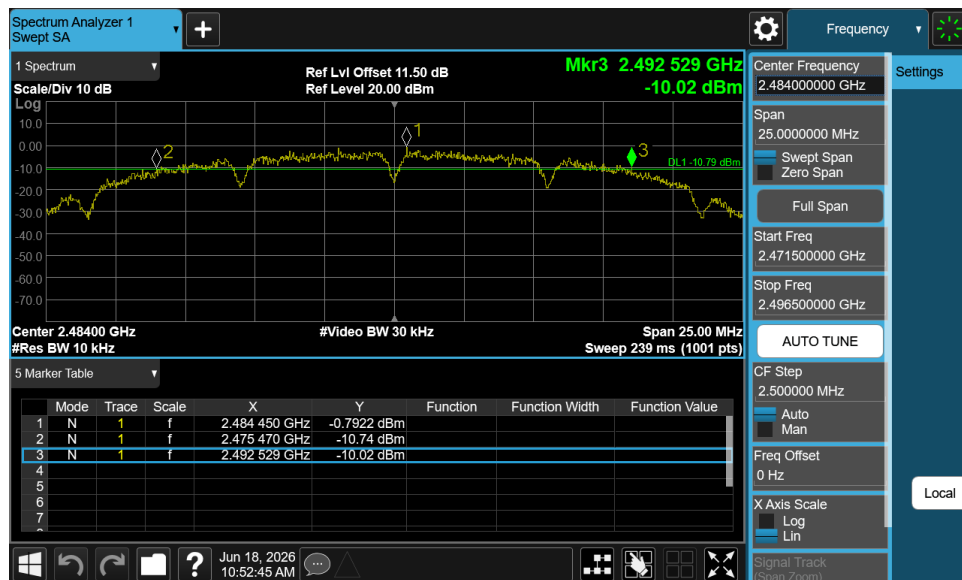


APPENDIX B - OCCUPIED BANDWIDTH AND SPREAD-SPECTRUM BANDWIDTH

Test Mode: TX Mode_IEEE 802.11b


Test Voltage	Normal Voltage	Remarks
Test Frequency (MHz)	2484	Mid of test frequency range
Occupied Bandwidth (MHz)	19.64	Limit $\leq$ 26 MHz
Spreading Bandwidth (MHz)	14.18	Limit $\geq$ 500 kHz (FHSS, DSSS)
Spreading Factor	10.31	Spreading Factor Limit $\geq$ 10 (DSSS)

Note: 1. Spreading Factor = Spreading Bandwidth / TR
(TR = 1.375 for 802.11b/CH14)

99% OBW

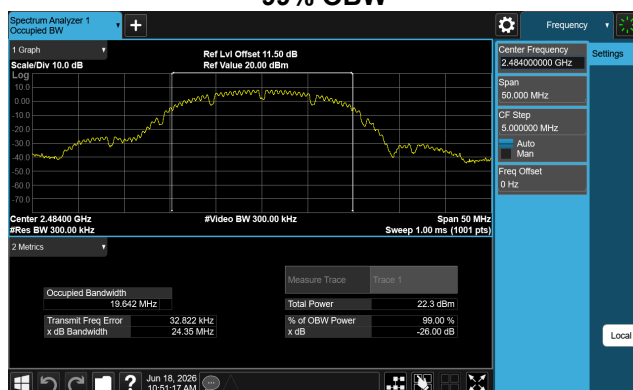

90% OBW

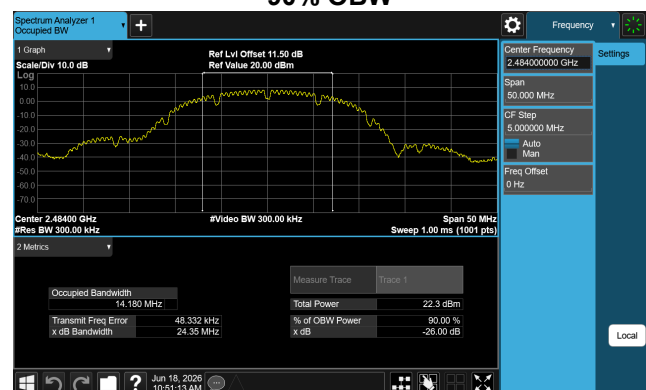

APPENDIX C - UNWANTED EMISSION INTENSITY


Test Mode: TX Mode_IIEEE 802.11b

Test Voltage		Normal Voltage		Remarks
Test Frequency		MHz		Mid of test frequency range
Unwanted Emission Intensity (Power emission within 1MHz bandwidth)	※ 1	MHz	987.39	Limit ≤ 2.5 μW/MHz (-26 dBm/MHz)
		μW/MHz	0.0023	
	※ 2	MHz	2458.00	Limit ≤ 2.5 μW/MHz (-26 dBm/MHz)
		μW/MHz	0.2723	
	※ 3	MHz	2470.99	Limit ≤ 25 μW/MHz (-16 dBm/MHz)
		μW/MHz	11.8850	
	※ 4	MHz	2497.00	Limit ≤ 25 μW/MHz (-16 dBm/MHz)
		μW/MHz	8.5901	
	※ 5	MHz	2510.00	Limit ≤ 2.5 μW/MHz (-26 dBm/MHz)
		μW/MHz	0.0612	

※1: 30MHz≤f≤1000MHz

※2: 1000MHz≤f<2458MHz

※3: 2458MHz≤f<2471MHz

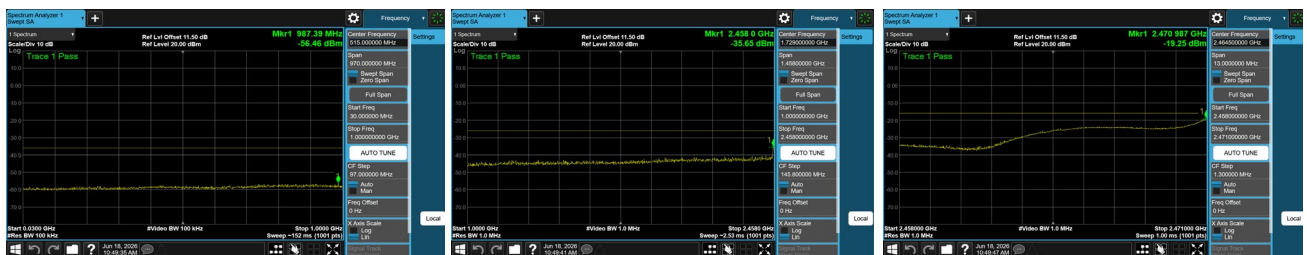

※4: 2497MHz<f≤2510MHz

※5: 2510MHz<f



APPENDIX D - ANTENNA POWER TOLERANCE

Test Mode:	TX Mode_ IEEE 802.11b
------------	-----------------------

Normal Voltage

Test Frequency (MHz)	Conducted RF output power density		Rated RF output power density	Conducted RF output power density Limit	Antenna Power Tolerance in Limit	
	(dBm/MHz)	(mW/MHz)	(mW/MHz)	(mW/MHz)	(+20%, -80%)	
2484	8.18	6.5766	7	10	-6.05	%

Test Frequency	EIRP	ERP	Limit
(MHz)	(dBm/MHz)	(dBm/MHz)	(dBm/MHz)
2484	8.98	6.83	12.14

Note:


- Antenna power tolerance = (conducted antenna power - rated antenna power)/rated antenna power * 100%
- Antenna Power value = SA measurement value (Include correction factor and cable loss)
Correction factor = $10 \log (X)$
X = the total number of antennas

APPENDIX E - LIMITATION OF COLLATERAL EMISSION OF RECEIVER


Test Mode: RX Mode_IIEEE 802.11b

Test Voltage			Normal Voltage	Remarks
Test Frequency		MHz	2484	Mid of test frequency range
Limitation of Collateral Emission of Receiver	※6	MHz	836.07	Limit ≤ 4 nW (-54 dBm)
		nW	0.0017	
	※7	MHz	6946.00	Limit ≤ 20 nW (-47 dBm)
		nW	0.0180	

※6: f<1GHz

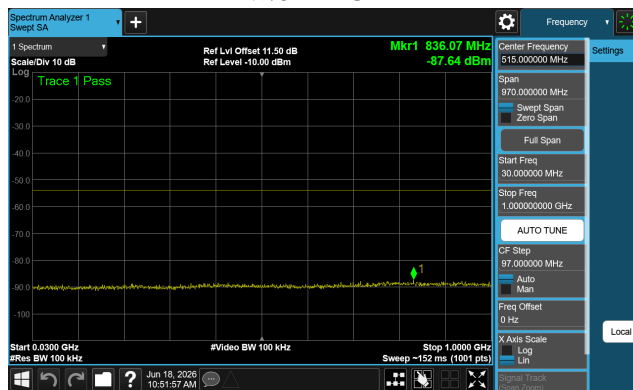

※7: 1GHz≤f

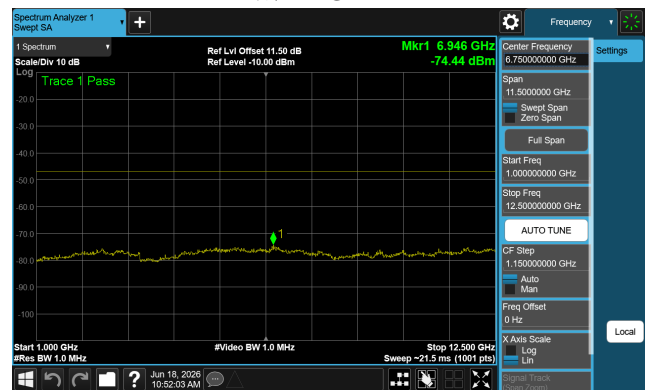

End of Test Report