

附錄 二

受測裝置之測試照片

1 電源傳導干擾電壓之配置照片

CIM2006013, 廠牌：SONY, 型號：WW271448



正面照片

CIM2006013, 廠牌：SONY, 型號：WW271448




背面照片

2 輻射量測之配置照片

2.1. 量測頻率範圍:30MHz-1GHz


Normal 模式

C1M2006013, 廠牌: SONY, 型號: WW271448

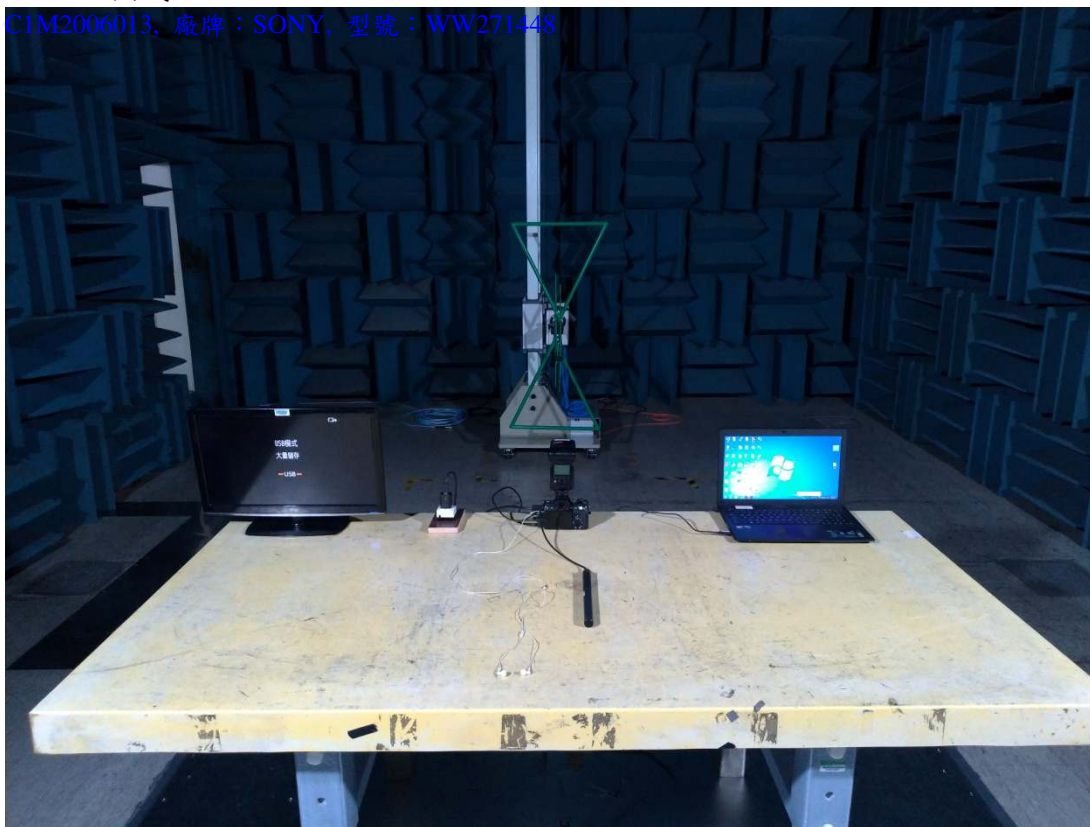


Charge/發射模式-平放

C1M2006013, 廠牌: SONY, 型號: WW271448

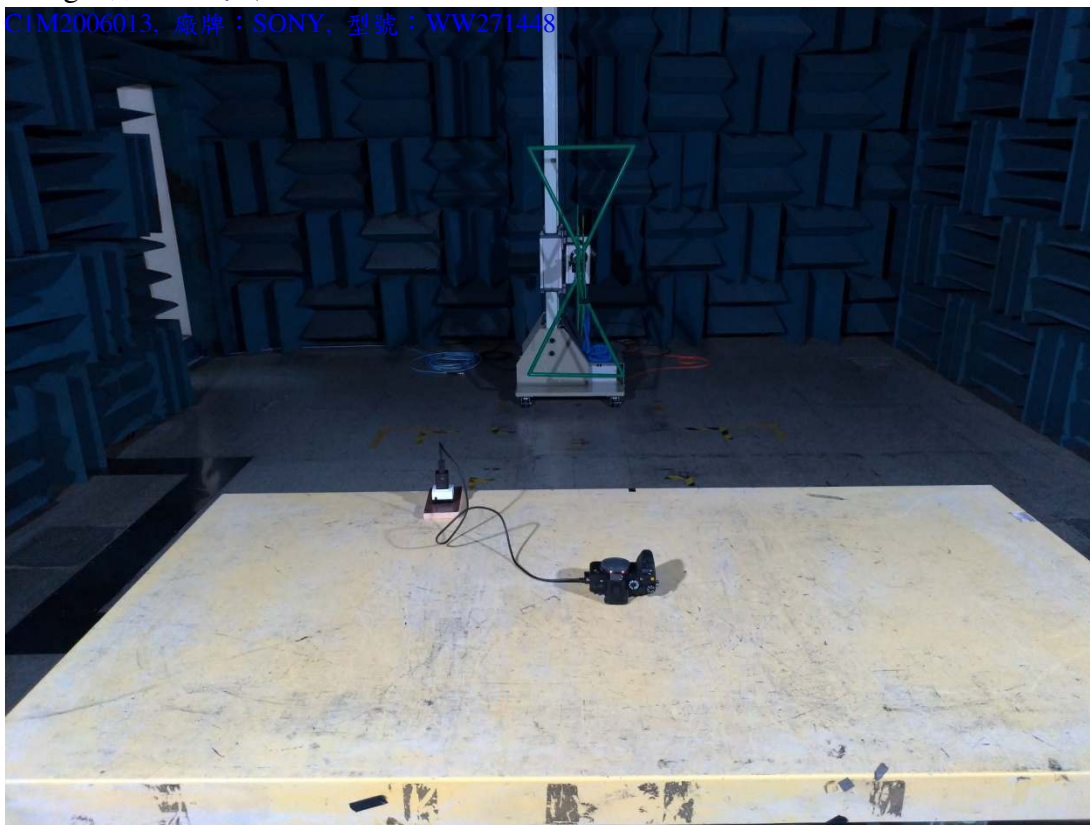


Charge/發射模式-側立

C1M2006013, 廠牌: SONY, 型號: WW271448

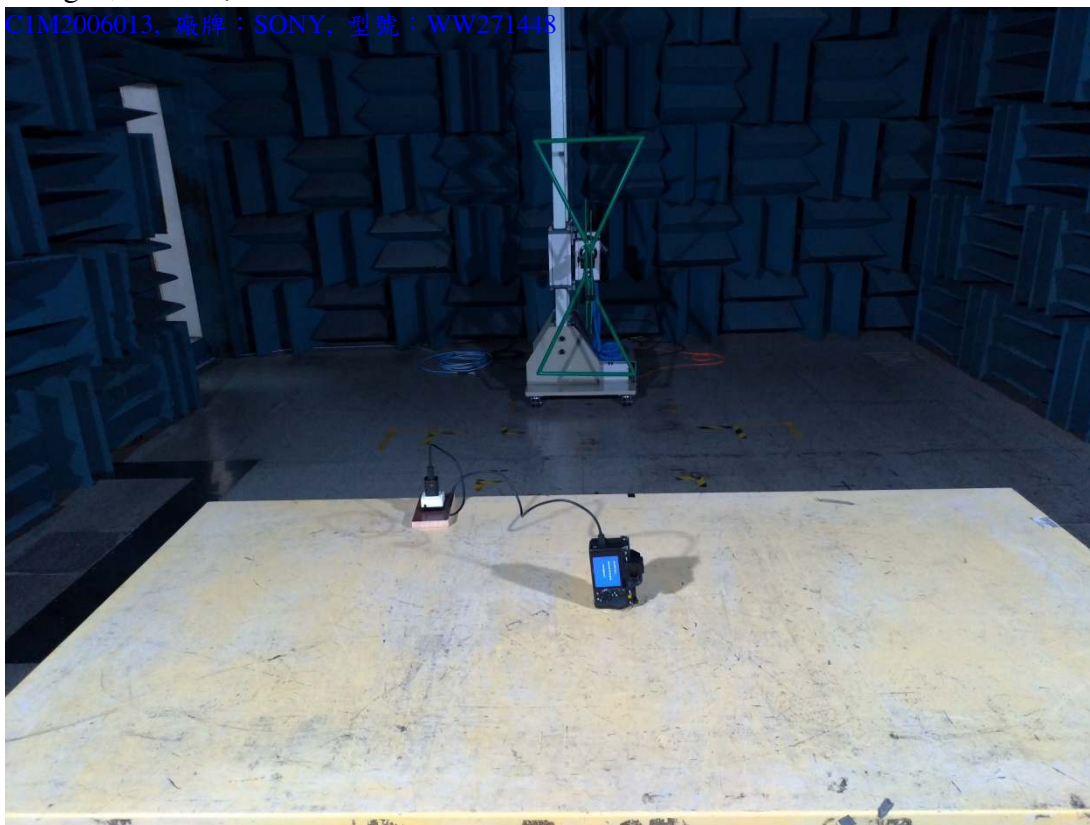

Charge/發射模式-站立


C1M2006013, 廠牌: SONY, 型號: WW271448

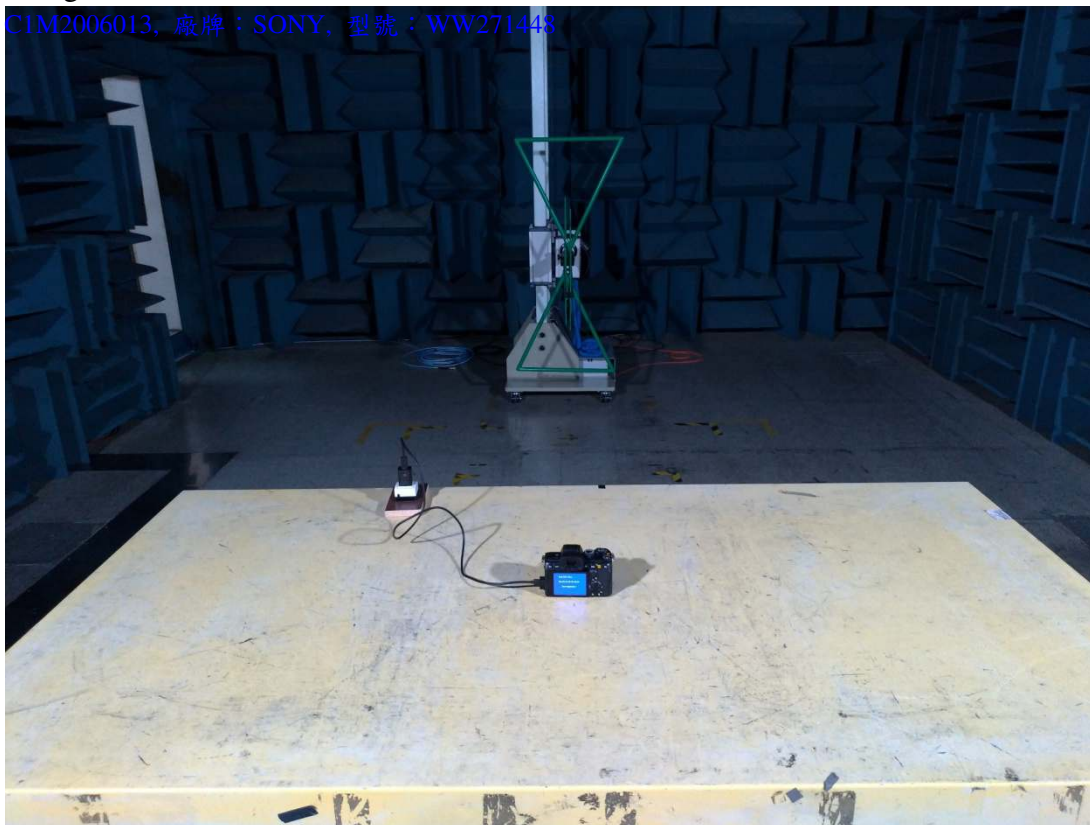

2.2. 量測頻率高於 1GHz 之測試


Normal 模式

C1M2006013, 廠牌：SONY, 型號：WW271448

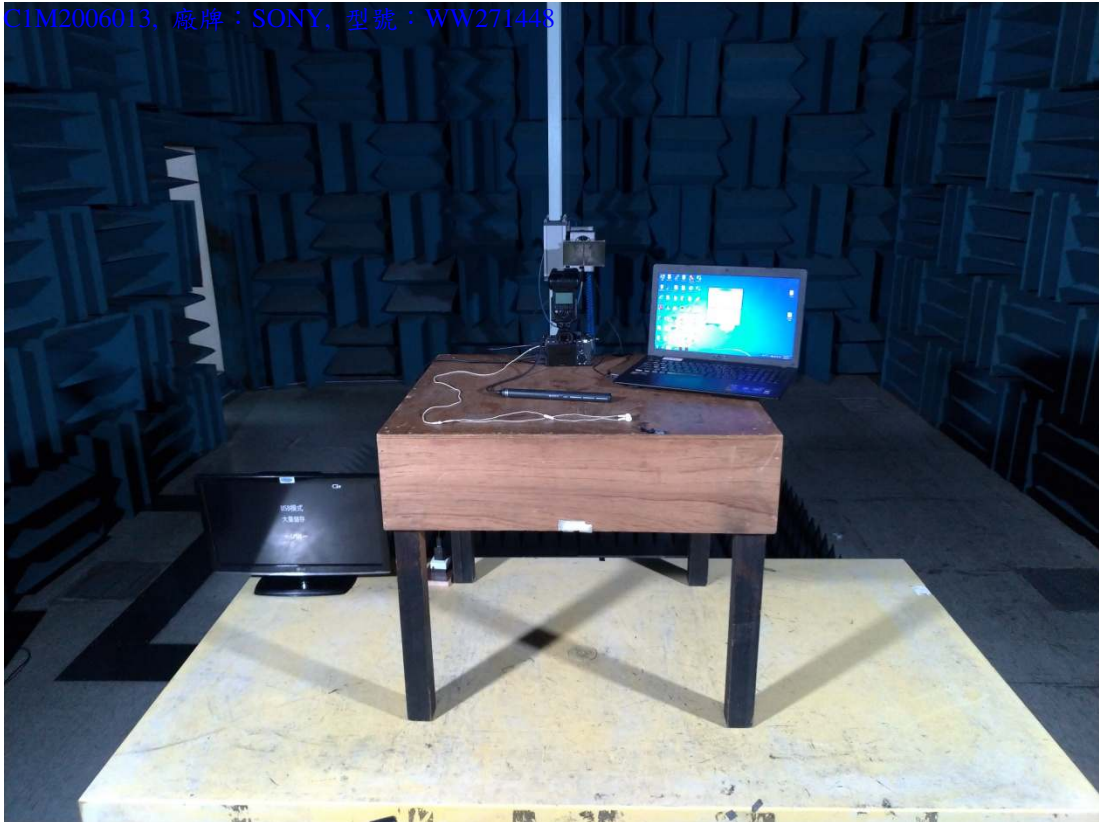

發射模式-平放

C1M2006013, 廠牌：SONY, 型號：WW271448

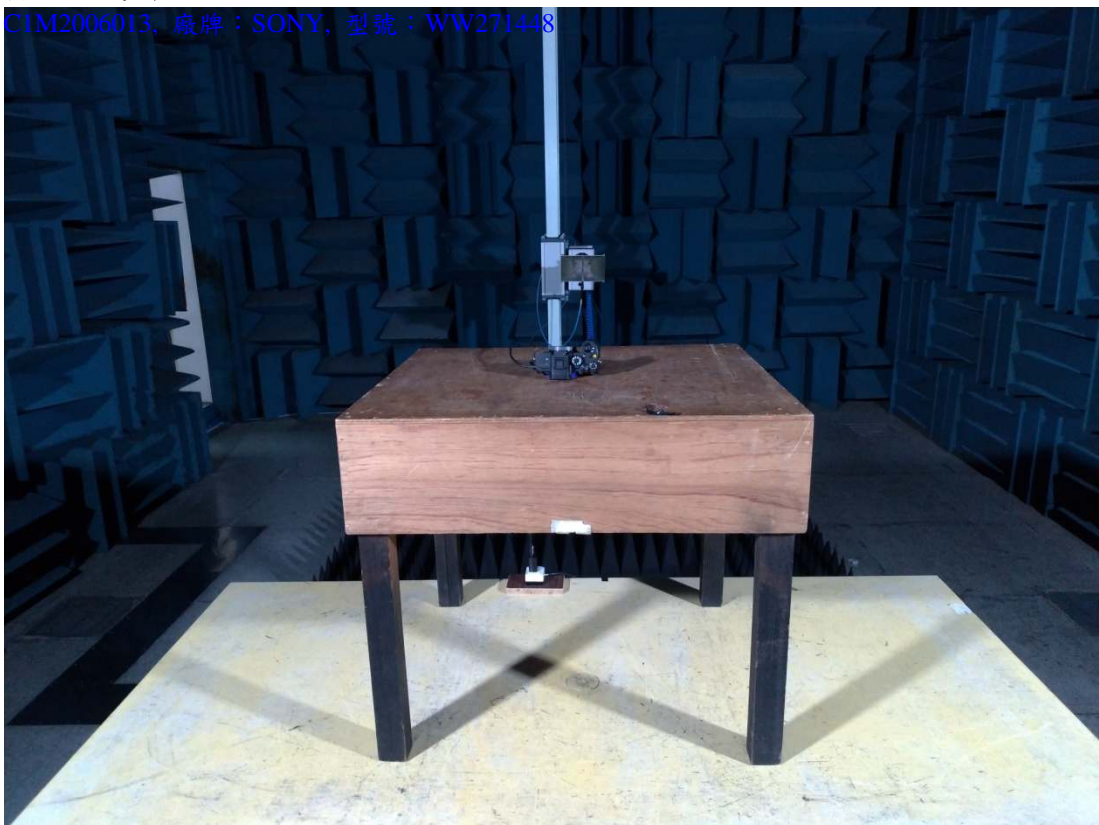


發射模式-側立

C1M2006013, 廠牌: SONY, 型號: WW271448



發射模式-站立

C1M2006013, 廠牌: SONY, 型號: WW271448

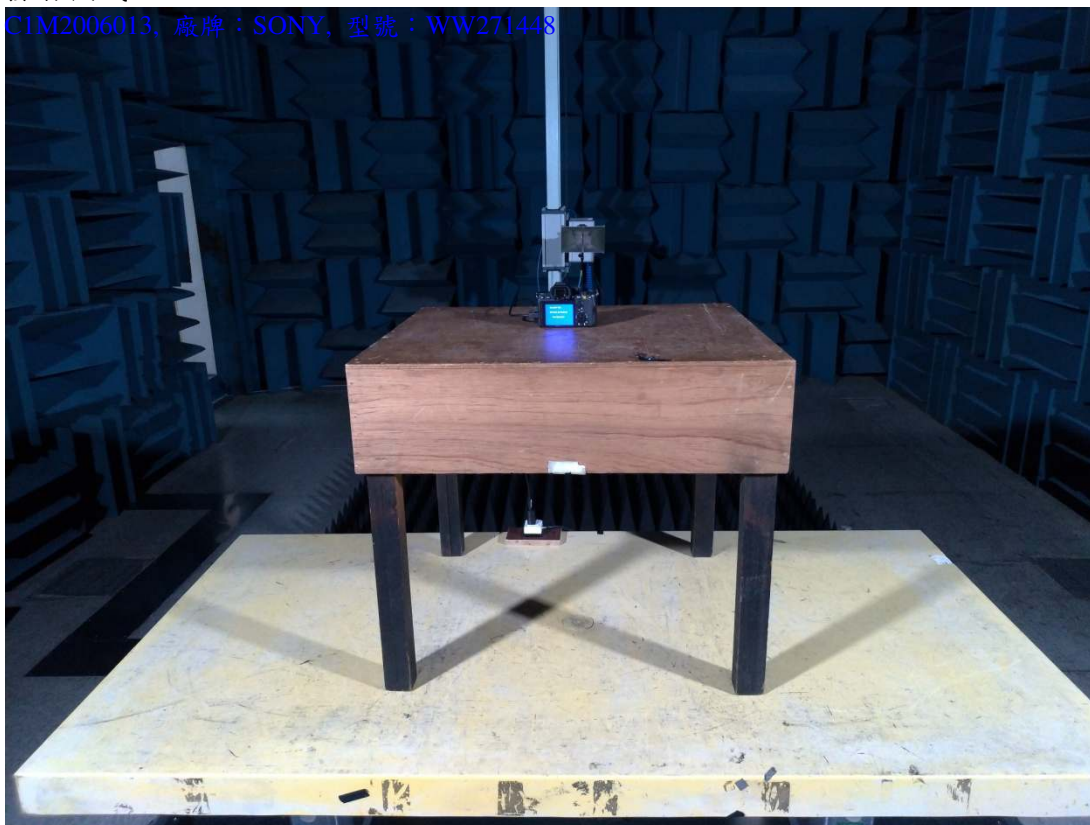

3 RF Conducted 量測

C1M2006013, 廠牌: SONY, 型號: WW271448

