

低功率射頻器材 檢驗報告

申請者	台灣索尼互動娛樂股份有限公司
申請者地址	臺北市信義區松高路1號9樓
製造廠商	Sony Interactive Entertainment Inc.
受檢設備名稱	Development Kit for PlayStation® 5
廠牌	SONY
型號	DFI-D1000AA
檢驗依據標準	國家通訊傳播委員會低功率射頻器材 技術規範 (LP0002)
受理日期	109年10月06日
發行日期	109年11月26日
報告編號	20-10-MAS-019-01
檢驗結果	合格

財團法人台灣商品檢測驗證中心

33383桃園市龜山區文明路29巷8號

電話：(03)3276170~74

傳真：(03)3276188

實驗室認可編號及範圍：0371 (9 kHz to 325 GHz)

實驗室認可證書有效期限：110年10月31日



報告內容索引

目錄	頁次
1 一般資料.....	5
1.1 產品描述.....	5
1.2 產品特性.....	5
1.3 測試方法之依據.....	5
2 適用規範.....	6
2.1 規範要求.....	6
2.2 限制使用之頻帶.....	9
3 受測裝置之系統說明.....	10
3.1 受測裝置.....	10
3.2 測試模式說明.....	11
4 電源線傳導干擾之量測.....	12
4.1 適用標準.....	12
4.2 測試方法.....	12
4.3 量測電源線傳導干擾之儀器.....	12
4.4 傳導干擾之量測結果.....	13
4.5 電源線傳導干擾之測試配置.....	21
4.6 傳導量測之配置照片.....	22
5 天線增益之要求.....	23
5.1 適用標準.....	23
5.2 天線增益.....	23
5.3 結果判定.....	23
6 輸出峰值功率之量測.....	24
6.1 適用標準.....	24
6.2 輸出功率之測試配置.....	24
6.3 輸出功率之量測儀器.....	24
6.4 輸出功率之量測結果.....	24
6.5 結果判定.....	36
7 開放頻帶外之量測.....	40
7.1 適用標準.....	40
7.2 開放頻帶邊緣之測試配置.....	40
7.3 量測開放頻帶邊緣之儀器.....	40
7.4 開放頻帶邊緣之量測結果.....	40

7.5 結果判定.....	64
8 跳頻頻道之要求.....	72
8.1 適用標準.....	72
8.2 量測配置.....	72
8.3 量測儀器.....	72
8.4 量測結果.....	73
8.5 結果判定.....	105
9 場強輻射之量測.....	107
9.1 適用標準.....	107
9.2 量測方法.....	107
9.3 量測場強輻射之儀器.....	107
9.4 場強度之計算.....	107
9.5 場強輻射之量測結果.....	108
9.5.1 諧波發射量測值.....	108
9.5.3 其它不必要之訊號 1GHz 以下	130
9.5.4 測量儀器之設定.....	138
9.5.5 禁用頻段邊緣之輻射場強量測結果.....	138
9.6 結果判定.....	139
9.7 輻射之測試配置.....	140
9.8 輻射量測之配置照片	141
10 量測之儀器.....	142

測試報告記錄

申請廠商：台灣索尼股份有限公司
 製造廠商：Sony Interactive Entertainment Inc.
 廠牌：SONY
 品名：Development Kit for PlayStation®5
 型號：DFI-D1000AA
 檢驗依據標準：國家通訊傳播委員會低功率射頻器材技術規範(LP0002)
 規範修訂日期109年07月01日
 發射功率(電場強度)：3.52 dBm (發射功率)
 工作頻率及調變方式：2402~2480MHz / GFSK, $\pi/4$ -DQPSK 及 8-DPSK
 天線規格：廠牌/型號/天線增益：LUXSHARE-ICT/L34RF049/3.0 dBi
 廠牌/型號/天線增益：LUXSHARE-ICT/L34RF050/4.0 dBi

- 備註：1. 本試驗報告中是描述本實驗室以最佳的知識和能力進行試驗，我們的責任僅限於合理與謹慎的試驗，並非確保賣方之法律和/或合同的義務。
 2. 本符合性試驗係依據適當的標準及試驗樣品進行測試，其中量測不確定度可符合國際標準要求不列入結果考量，本試驗報告的結果僅針對受試驗之樣品負責，無法確保產品生產過程中的品質與性能要求。
 3. 非經本中心同意，檢驗報告不得摘錄複印使用。（全部複製除外）。

項次	測試項目	適用規範	測試結果	量測設備	結果判定
1	電源線傳導干擾	低功率射頻器材技術規範 3.3節	請參閱4.3節	請參閱4.4節	合格
2	天線增益之要求	低功率射頻器材技術規範 4.10.1.3	請參閱5.2節	----	合格
3	輸出峰值功率之要求	低功率射頻器材技術規範 4.10.1.2節之(1)	請參閱6.4節	請參閱6.3節	合格
4	開放頻帶外之發射要求	低功率射頻器材技術規範 4.10.1.5節	請參閱7.4節	請參閱7.3節	合格
5	跳頻頻道之要求	低功率射頻器材技術規範 4.10.1.6節之(1)	請參閱8.4節	請參閱8.3節	合格
6	場強輻射	低功率射頻器材技術規範 4.10.1.5節	請參閱9.5節	請參閱9.3節	合格
	以下空白				

測量實驗室負責人：鄭景
109.11.26

直接主管：黃啟瑞
109.11.26

量測員：鄧世華
109/11/26

1 一般資料

1.1 產品描述

- a) 產品型態 : Development Kit for PlayStation® 5
- b) 商 標 : SONY
- c) 產品型號 : DFI-D1000AA
- d) 供應電源 : AC 110V

備註：本產品內含WLAN、Bluetooth 及 Bluetooth LE 無線技術，WLAN部份包含DTS與UNII頻帶。本報告僅記錄 Bluetooth 部份，Bluetooth LE 部份請見ETC報告編號: 20-10-MAS-019-02，DTS 部份請見ETC報告編號: 20-10-MAS-019-03，UNII Band 1 (5180 MHz 至 5240 MHz)部份請見ETC報告編號: 20-10-MAS-019-04， UNII Band 2 (5260 至 5320 MHz)部份請見ETC報告編號: 20-10-MAS-019-05，UNII Band 3 (5500 至 5700 MHz) 部份請見ETC報告編號: 20-10-MAS-019-06，UNII Band 4 (5725至 5850 MHz) 部份請見ETC報告編號: 20-10-MAS-019-07。

1.2 產品特性

此裝置為 Development Kit for PlayStation® 5，發射頻率落於 2402 至 2480 MHz，使用79個跳頻頻道，採用展頻之跳頻技術（FHSS），調變方式為 GFSK， $\pi/4$ -DQPSK 及 8DPSK。本產品內含兩個Bluetooth Module，Module 1輸出功率為 3.52 dBm 或 2.25 mW；Module 2輸出功率為 3.23 dBm 或 2.10 mW。

1.3 測試方法之依據

本測試報告之所有項目皆依據國家通訊傳播委員會低功率射頻器材技術規範以及參考IEEE ANSI、歐盟ETSI EN與美國EIA、FCC 47 CFR PART 2、KDB及ARIB STD-T67 等有關檢驗之規定。

試驗室介紹：財團法人台灣商品檢測驗證中心電磁相容試驗室通過下列評鑑、認可、登錄與相互認可協議：

- ❶ ISO/IEC 17025 : TAF(0371), NVLAP(Lab code: 200133-0), CBTL(TÜ V SÜ D)
- ❷ Recognized : BSMI, NCC, FCC(TW0371, TW1112), ISED(Industry Canada Site # 2949A-2)
- ❸ Filing : VCCI (C-13518, R-13177, G-10098, T-11682)
- ❹ MRA : Australia, New Zealand, Singapore

2 適用規範

2.1 規範要求

(1) 傳導之規定

依據國家通訊傳播委員會低功率射頻器材技術規範之3.3節，以市電為電源之低功率射頻器材，其傳導回電源線上頻率自150KHz~30MHz之射頻電壓(在電源端子每一電源線對接地點)應小於或等於下表所列之限制值。測量時應經過50微亨利及50歐姆之電源線阻抗穩定網路(Line Impedance Stabilization Network ; LISN)。頻率重疊處，以較低限制值為準。

頻率範圍 MHz	傳導限制值(dB μ V)	
	準峰值(Quasi-peak)	平均值(Average)
0.15 – 0.5	66-56(註)	56-46(註)
0.5 – 5	56	46
5 – 30	60	50

註:隨頻率之對數遞減

(2) 輻射之規定

依據國家通訊傳播委員會低功率射頻器材技術規範4.10.1.5之要求，落於3.5節禁用頻段之輻射發射，應符合3.6節之規定：

頻率(f) MHz	電場強度 (微伏特/公尺， μ V/m)	測距 (公尺)
$0.009 \leq f \leq 0.490$	2400/f(kHz)	300
$0.490 < f \leq 1.705$	24000/f(kHz)	30
$1.705 < f < 30$	30	30
$30 \leq f \leq 88$	100	3
$88 < f \leq 216$	150	3
$216 < f \leq 960$	200	3
$960 < f$	500	3

(3) 天線增益之要求

對使用跳頻技術之低功率射頻器材，依據國家通訊傳播委員會低功率射頻器材技術規範4.10.1.3之規定，

(1)操作於2400 MHz~2483.5 MHz 頻段：

(A)進行固定式點對點操作時，其發射天線之方向性增益超過6 dBi，每超過3 dBi，最大傳導輸出功率限制值應降低1 dB。

(B)天線以多向波束發射方式(含同時發射或循序發射)將訊號導向多個接收機或接收機群組時，應符合下列規定：

(a)非同時發射多向波束者，所有載波或頻道傳輸至所有天線陣列或陣列群之總和傳導輸出功率應符合4.10.1.2 之功率限制值。如天線/天線陣列群之方向性增益超過6 dBi，每超過3 dBi，總和傳導輸出功率限制值應降低1 dB。方

向性增益值應計算如下：

- (i) 方向性增益值 = $10\log(\text{天線陣列之單元數目}) + \text{各單元中最高之方向性增益值}$ 。
- (ii) 天線陣列間之遮蔽效應或波束干涉損失能充分佐證時，方向性增益得低於(i)計算數值。
- (b) 同時發射多向波束於相同或不同頻道者，其每一波束功率應符合(a)之功率限制值。如發射波束有重疊現象，功率應降低，以確保總和傳導輸出功率符合(a)之限制值。同時發射的所有波束總和傳導輸出功率不大於(a)總和傳導輸出功率限制值加8 dB。方向性增益值計算同(a)。
- (c) 發射機之天線具備單向波束功能者，應符合(1)(A)及(3)後段之規定。
- (2) 操作頻率為5725 MHz～5850 MHz 且進行固定式點對點操作時，其發射天線之方向性增益超過6 dBi，不需降低最大傳導輸出功率。
- (3) 除(1)及(2)外，使用超過6 dBi 方向增益之發射天線時，應依超過6 dBi天線方向增益的dBi總量，等量減少最大傳導輸出功率限制值。

(4) 頻寬之要求

對使用跳頻技術之低功率射頻器材，依據國家通訊傳播委員會低功率射頻器材技術規範4.10.1.6節之(1)(A)規定，跳頻系統之載波頻率頻道間隔應大於或等於25 kHz 或跳頻頻道之20dB 頻寬，兩者取較寬者。但操作頻率為2400 MHz～2483.5 MHz 頻段且輸出功率應小於或等於125 mW 跳頻系統，其載波頻率頻道間隔不得小於25 kHz 或跳頻頻道20 dB 頻寬之三分之二，兩者取較寬者。系統之跳頻頻道應依虛擬亂數排列，在各頻率之跳頻頻道上跳躍。每一發射機必須均等的使用每一頻率。系統接收機應具有與發射機跳躍頻道頻寬相匹配之輸入頻寬，且應隨所發射之訊號同步偏移接收頻率。

(5) 峰值傳導輸出功率之要求

依據國家通訊傳播委員會低功率射頻器材技術規範4.10.1.2節之(1)(A)及(B)規定，操作於2400-2483.5兆赫(MHz)者：

4.10.1.2 峰值傳導輸出功率：

(1) 操作於2400 MHz～2483.5 MHz 者

(A) 至少使用75 個跳頻頻道之跳頻系統：1 W(含)以下。

(B) 除(A)外，依4.10.1.6 (1)(A)(a)之跳頻系統：0.125 W(含)以下。

除使用附件二之峰值輸出功率測量方式外，並得使用以最大傳導輸出功率(Maximum Conducted Output Power)作為測量方式。

(6) 帶外發射之要求

依據國家通訊傳播委員會低功率射頻器材技術規範4.10.1.5 帶外發射限制：操作頻帶範圍外之任意100 kHz 內，發射機所產生的射頻功率相較於使用頻帶範圍中包含最高所需功率之100 kHz 內的射頻功率，其衰減值限制如下：

(1)輸出功率以附件二之峰值輸出功率方式測量者，至少須衰減20 dB，可使用射頻傳導或輻射方式測量。

(2)輸出功率以4.10.1.2(1)(C)之最大傳導輸出功率測量方式者，至少須衰減30 dB。

此外，落於3.5 禁用頻段之輻射發射，應符合3.6 之規定。

(7) 跳頻頻道之使用

依據國家通訊傳播委員會低功率射頻器材技術規範4.10.1.6節之(1)(A)之規定，跳頻系統之載波頻率頻道間隔應大於或等於25 kHz或跳頻頻道之20 dB頻寬，兩者取較寬者。但操作頻率為2400-2483.5兆赫（MHz）頻段且輸出功率小於或等於125 mW跳頻系統，其載波頻率頻道間隔不得小於25 kHz或跳頻頻道20 dB頻寬之三分之二，兩者取較寬者。系統之跳頻頻道應依虛擬亂數排列，在各頻率之跳頻頻道上跳躍。每一發射機必須均等的使用每一頻率。系統接收機應具有與發射機跳躍頻道頻寬相匹配之輸入頻寬，且應隨所發射的信號同步偏移接收頻率。

依據國家通訊傳播委員會低功率射頻器材技術規範4.10.1.6節之(1)(A)(a)之規定，操作於2400-2483.5MHz之展頻跳頻系統，須使用至少15個無重疊的頻道，在0.4秒乘以跳頻頻道數之週期內，任一頻率佔用之平均時間應小於或等於0.4秒。應使用智慧型跳頻技術，以避免佔用於特定跳頻頻道。

依據國家通訊傳播委員會低功率射頻器材技術規範4.10.1.6節之(4)之規定，跳頻展頻系統無需在每次傳輸中使用所有可用之跳頻頻道。由發射機與接收機組成之系統須符合本節的所有規定，且發射機應以連續的資料或資訊流傳送。此外，系統所使用的急速傳輸脈衝(transmission bursts)須符合頻率跳頻系統的定義且其傳輸須分散於本節所規定之最少的使用跳頻頻道數。

依據國家通訊傳播委員會低功率射頻器材技術規範4.10.1.6節之(5)之規定，跳頻展頻系統允許在操作頻譜內辨認其他使用者，並能個別獨立選擇和調整自己的跳頻組，以避免跳至已被占用的頻道。跳頻展頻系統不可使用多部並聯之發射機，以避免同時佔用個別跳頻頻率。

2.2 限制使用之頻帶

頻率 (MHz)	頻率 (MHz)
0.090~0.110	1660.0~1785.0
0.490~0.510	1805.0~1880.0
2.172~2.198	1885.0~1900.0
3.013~3.033	1905.0~1985.0
4.115~4.198	2010.0~2025.0
5.670~5.690	2110.0~2170.0
6.200~6.300	2200.0~2300.0
8.230~8.400	2310.0~2390.0
12.265~12.600	2483.5~2900.0
13.340~13.430	3260.0~3267.0
14.965~15.020	3332.0~3339.0
16.700~16.755	3345.8~3358.0
19.965~20.020	3500.0~4400.0
25.500~25.700	4500.0~5250.0
37.475~38.275	5350.0~5460.0
73.500~75.400	7250.0~7750.0
108.00~138.00	8025.0~8500.0
149.90~150.05	9000.0~9200.0
156.70~156.90	9300.0~9500.0
162.01~167.17	10600~12700
167.72~173.20	13250~13400
240.00~285.00	14470~14500
322.00~335.40	15350~16200
399.90~410.00	17700~21400
485.00~510.00	22010~23120
608.00~614.00	23600~24000
703.00~748.00	31200~31800
758.00~803.00	36430~36500
825.00~915.00	38600 以上
930.00~1240.0	
1300.0~1427.0	
1435.0~1626.5	

3 受測裝置之系統說明

3.1 受測裝置


裝置名稱	製造者/代理者	型 號	纜線說明
* Development Kit for PlayStation®5	Sony Interactive Entertainment Inc.	DFI-D1000AA	非隔離電源線 2.5m*1 (廠牌:I-Sheng /型號:SP-301)
USB 3.0 HDD	I/O DATA	HDPX-UTCIK	隔離信號線 0.3m * 1 (USB 3.0)
USB Memory	SONY	USM16CA1	----
Keyboard	DELL	KB216P	非隔離信號線 1.8m * 1
USB Memory	SONY	USM32GRB	----
Controller	SONY	CFI-ZCT1G	----
*USB Cable 1 (註 2)	LUXSHARE-ICT	L34U20	隔離信號線 1.5m * 1
Controller	SONY	CFI-ZCT1G	----
*USB Cable 2 (註 2)	JPC	PK3U2EG	隔離信號線 1.5m * 1
Monitor	DELL	SE2216H	非隔離電源線 1.8m * 1
*HDMI Cable	LUXSHARE-ICT	L34HD	隔離信號線 1.5m * 1
Switch	KOKUSAI DENGYO	SPS-1	非隔離信號線 2.0m * 1
USB 3.0 HDD	SONY	HD-EG5	隔離信號線 1.0m * 1 (USB 3.0)
Notebook	HP	Probook650G1	非隔離信號線 10m * 1 (LAN)
Wireless Router	TP-LINK	TL-WDR4300	非隔離電源線 1.8m*1/Adapter 非隔離信號線 10m * 1 (LAN)
Wireless Router	ASUS	RT-AX88U	非隔離電源線 2.3m*1/Adapter
Controller	SONY	CFI-ZCT1G	----
Controller	SONY	CFI-ZCT1G	----

註: 1.標記“*”表欲申請之受測物及配件。

2.配件USB Cable 1和USB Cable 2，擇一搭配販售。


3.測試配置：

工程模式

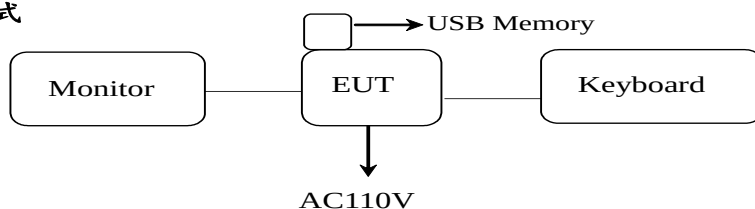

Normal Mode

遠端

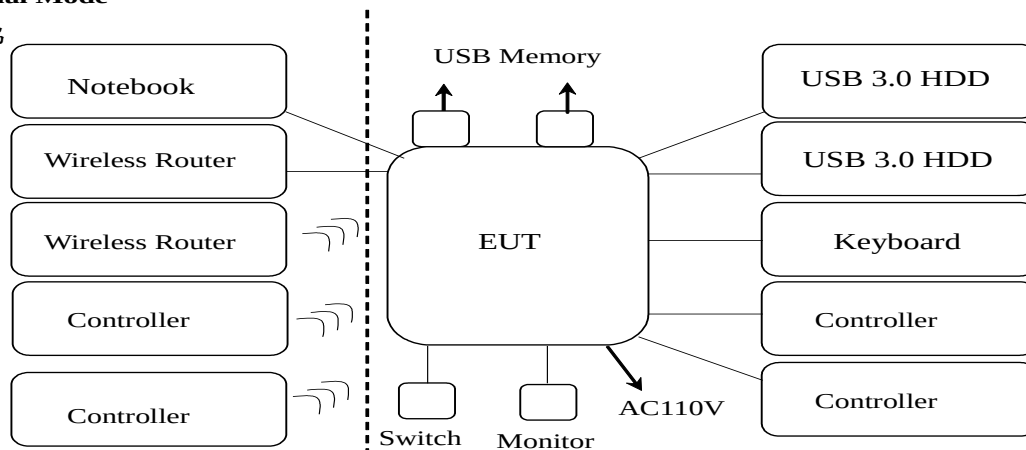

4.軟體設定:

測試軟體:	樣品內含測試程式
Power Setting:	Default

3.2 測試模式說明

3.2.1 調變方式及模式

	Test Mode	Type	Note
BT_Module1	A	NON-EDR	GFSK
	B	EDR	$\pi/4$ -DQPSK, 8-DPSK(註1)
BT_Module2	C	NON-EDR	GFSK
	D	EDR	$\pi/4$ -DQPSK, 8-DPSK(註1)

Normal Mode:

Test Mode	Note
E	HDMI+USB+BT+LAN
F	HDMI+USB+BT+WiFi

Test Channel	Frequency (MHz)
Channel Low(L)	2402
Channel Mid(M)	2441
Channel High(H)	2480

3.2.2 測試項目及模式

Item	測試項目	測試模式	測試頻率(MHz)
1	輸出峰值功率	A、B、C、D	L、M、H
	測試結果(Worse Case) (註2)	B、D	
2	電源線傳導干擾	B、D、E、F	-
3	開放頻帶外之量測	A、B、C、D	L、M、H
4.1	跳頻頻道(頻道數)	A、C	L~H (註3)
4.2	跳頻頻道(載波間隔)	A、C	M (註3)
4.3	跳頻頻道(佔用時間)	A、C	M (註3)
4.4	頻道寬度	A、B、C、D	L、M、H
5.1	場強輻射之量測(1GHz以下)	B、D、E、F	M (Worse Case)
5.2	場強輻射之量測(1GHz以上)	B、D、E、F	L、M、H
5.3	場強輻射之量測(禁用頻段邊緣)	A、B、C、D	L、H

註: 1.EDR Type 中 $\pi/4$ -DQPSK 及 8-DPSK 預掃時, 8-DPSK 為 worse case, 以此模式為最終測試模式並記錄之。

2. Test Mode (A, B) 和 Test Mode (C, D) 分別以輸出峰值功率最高者做最終輻射與傳導測試並記錄之。
3. 跳頻頻道在二種 Test Mode (A, B) 和 Test Mode (C, D) 於高, 中, 低頻道預掃時無差異, 選擇 Test Mode A 和 Test Mode C 以 Channel Mid 作最終測試並記錄之。
4. 量測場強輻射時, 應對其兩個正交軸 (X、Y) 的方位評估測試, 並分別測試以找出最大輻射電場強度軸向, 以最差軸模式測試, 並記錄其值與軸向放置。
5. 依 NCC 74 次一致性會議: 審驗時不具一般正常使用模式者, 得不包括一般正常使用模式。

3.2.3 測試場地

項次	測 試 場 地
1	■ RE02 — EMC B1 — N2 第一大樓地下二樓 3m 半電波暗室(N2)
2	■ CE04 — 10M 2F 第三大樓二樓傳導測試室(10m 大樓)
3	■ RF — Cond01 第一大樓地下一樓直量測試區
4	□ RF — Cond02 第一大樓地下二樓直量測試區

4 電源線傳導干擾之量測

4.1 適用標準

依據國家通訊傳播委員會低功率射頻器材技術規範3.3節之要求。

4.2 測試方法

將待測物置於0.8米高的非金屬桌面，使其在工作狀態，待測物電源線接至電源線阻抗穩定網路上，從測試接收機記錄頻率由 0.15MHz 至 30MHz 之間之電源線傳導干擾強度。

4.3 量測電源線傳導干擾之儀器

儀器名稱	廠 牌	型 號
EMI Test Receiver	R&S	ESCI
V-LISN	R&S	ENV216

測試軟體: EZ-EMC (Ver. ETC-03A1)

4.4 傳導干擾之量測結果

測試工程師: 羅世勇

4.4.1 測試狀態: BT_Module1


File: 20-10-MAS-019 #1

Date: 2020/11/14

Temperature: 22 °C

Time: 上午 10:39:33

Humidity: 60 %

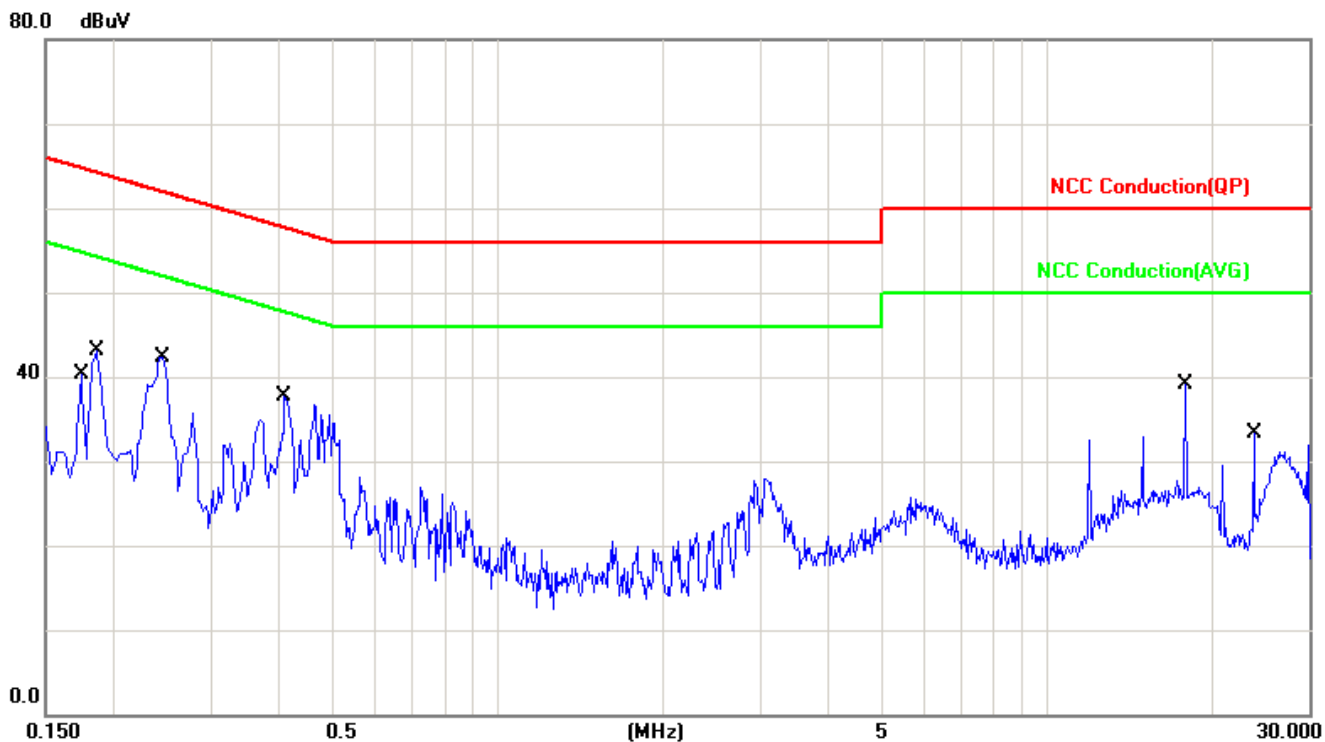

Site: CE04-10M 2F
 Condition: NCC Conduction(QP)
 EUT: Development Kit for PlayStation5
 Model: DFI-D1000AA
 Test Mode: BT1
 Note:

Phase: L1
 Power: AC 110V/60Hz
 Operator: Phillip

No.	Frequency (MHz)	Reading (dBuV)	Detector	Corrected (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)
1	0.174	30.69	QP	9.66	40.35	64.77	-24.42
2	0.186	33.44	QP	9.65	43.09	64.21	-21.12
*3	0.246	32.70	QP	9.65	42.35	61.89	-19.54
4	0.410	27.98	QP	9.66	37.64	57.65	-20.01
5	17.910	29.25	QP	9.91	39.16	60.00	-20.84
6	23.878	23.44	QP	9.93	33.37	60.00	-26.63

- 註： 1. “---”表示量測準峰值的結果符合平均值的限制值，則視為同時符合準峰值與平均值的限制值，不需再對其平均值進行量測。
 2. “#”表示干擾值太小，直接量取其峰值。
 3. 標記“***”表示為本地震盪頻率及其諧波。
 4. 量測不準確度: $\pm 2.5\text{dB}$ ($150\text{kHz} \leq f \leq 30\text{MHz}$)。


File: 20-10-MAS-019 #2

Date: 2020/11/14

Temperature: 22 °C

Time: 上午 10:40:33

Humidity: 60 %

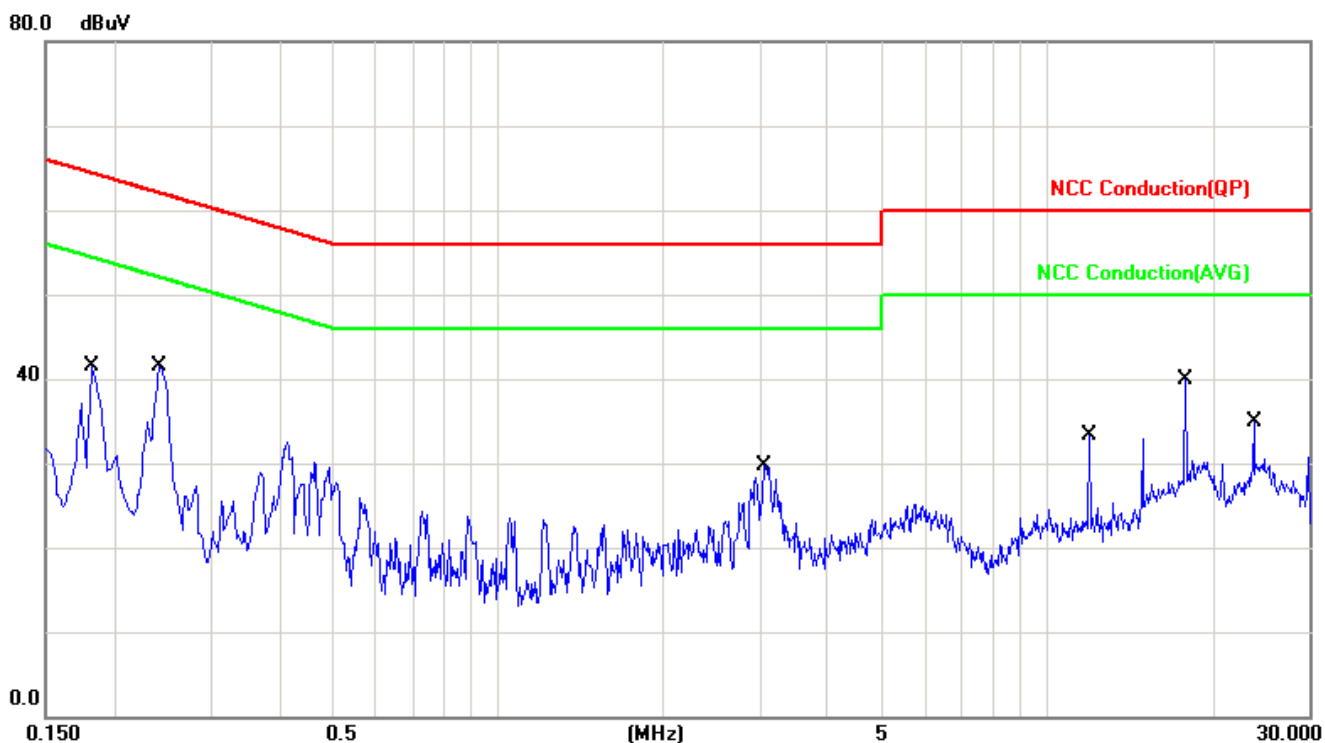

Site: CE04-10M 2F
 Condition: NCC Conduction(QP)
 EUT: Development Kit for PlayStation5
 Model: DFI-D1000AA
 Test Mode: BT1
 Note:

Phase: N
 Power: AC 110V/60Hz
 Operator: Phillip

No.	Frequency (MHz)	Reading (dBuV)	Detector	Corrected (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)
1	0.182	31.99	QP	9.59	41.58	64.39	-22.81
2	0.242	31.82	QP	9.59	41.41	62.03	-20.62
3	3.054	19.99	QP	9.66	29.65	56.00	-26.35
4	11.938	23.38	QP	9.84	33.22	60.00	-26.78
*5	17.906	29.92	QP	9.96	39.88	60.00	-20.12
6	23.874	24.84	QP	10.02	34.86	60.00	-25.14

- 註： 1. “----”表示量測準峰值的結果符合平均值的限制值，則視為同時符合準峰值與平均值的限制值，不需再對其平均值進行量測。
 2. “#”表示干擾值太小，直接量取其峰值。
 3. 標記“***”表示為本地震盪頻率及其諧波。
 4. 量測不準確度: $\pm 2.5\text{dB}$ ($150\text{kHz} \leq f \leq 30\text{MHz}$)。

4.4.2 測試狀態: BT_Module2

File: 20-10-MAS-019


#4

Date: 2020/11/14

Temperature: 22 °C

Time: 上午 10:43:15

Humidity: 60 %

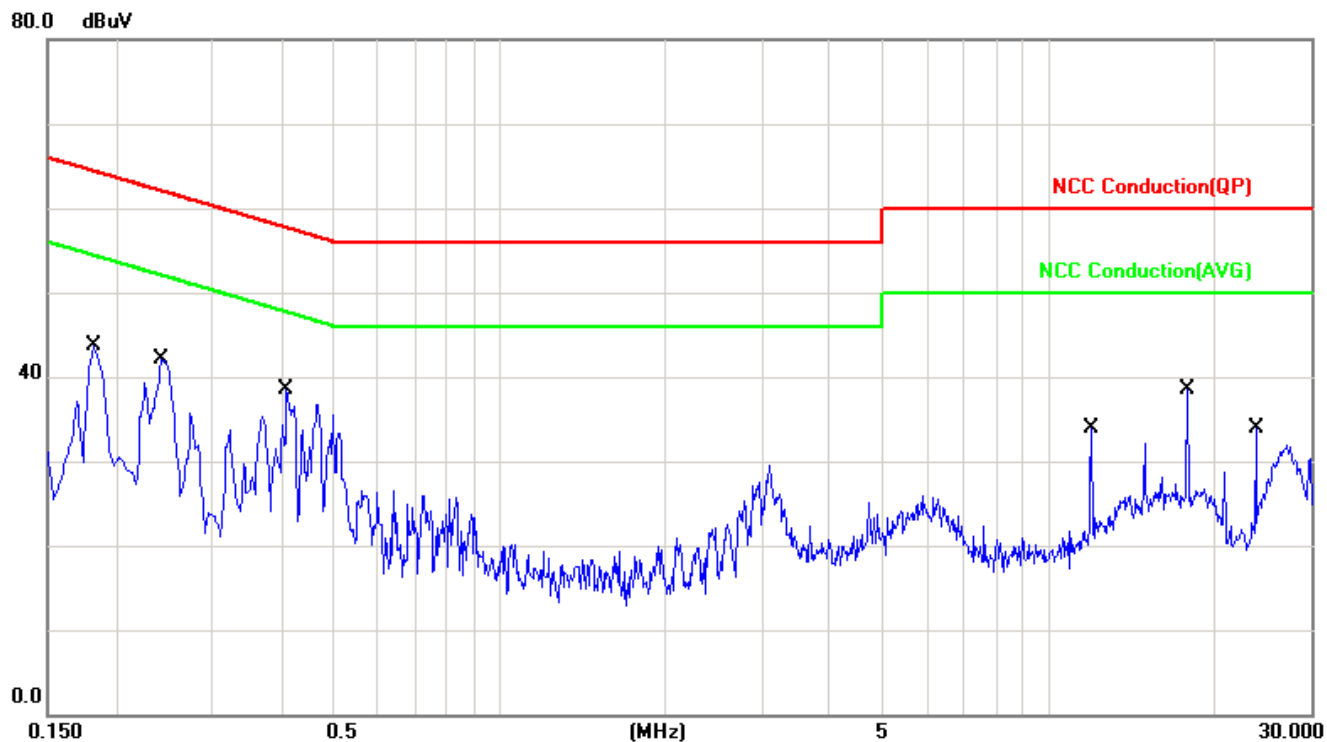

Site: CE04-10M 2F
 Condition: NCC Conduction(QP)
 EUT: Development Kit for PlayStation5
 Model: DFI-D1000AA
 Test Mode: BT2
 Note:

Phase: L1
 Power: AC 110V/60Hz
 Operator: Phillip

No.	Frequency (MHz)	Reading (dBuV)	Detector	Corrected (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)
1	0.182	34.14	QP	9.65	43.79	64.39	-20.60
2	0.242	32.35	QP	9.65	42.00	62.03	-20.03
*3	0.410	28.75	QP	9.66	38.41	57.65	-19.24
4	11.934	24.06	QP	9.85	33.91	60.00	-26.09
5	17.902	28.64	QP	9.91	38.55	60.00	-21.45
6	23.870	23.88	QP	9.93	33.81	60.00	-26.19

- 註： 1. “----”表示量測準峰值的結果符合平均值的限制值，則視為同時符合準峰值與平均值的限制值，不需再對其平均值進行量測。
 2. “#”表示干擾值太小，直接量取其峰值。
 3. 標記“***”表示為本地震盪頻率及其諧波。
 4. 量測不準確度: $\pm 2.5\text{dB}$ ($150\text{kHz} \leq f \leq 30\text{MHz}$)。


File: 20-10-MAS-019 #3

Date: 2020/11/14

Temperature: 22 °C

Time: 上午 10:41:47

Humidity: 60 %

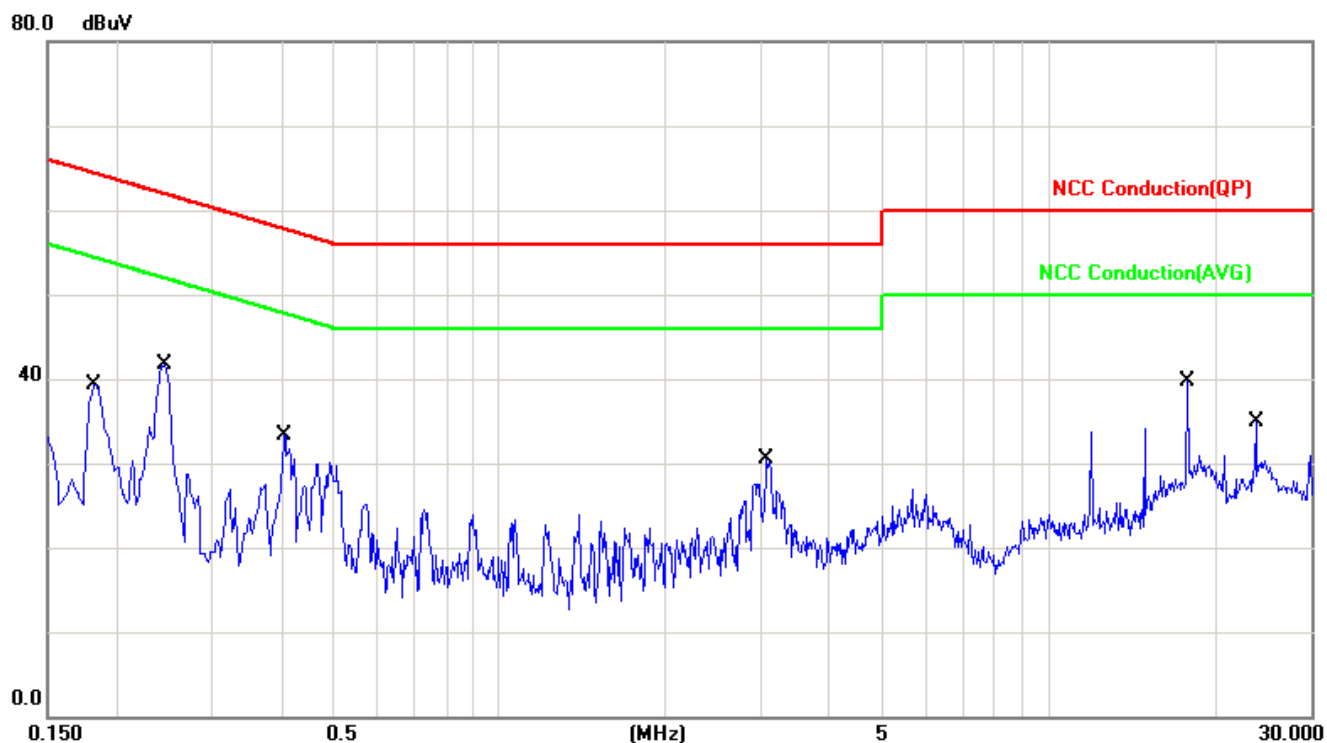

Site: CE04-10M 2F
 Condition: NCC Conduction(QP)
 EUT: Development Kit for PlayStation5
 Model: DFI-D1000AA
 Test Mode: BT2
 Note:

Phase: N
 Power: AC 110V/60Hz
 Operator: Phillip

No.	Frequency (MHz)	Reading (dBuV)	Detector	Corrected (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)
1	0.182	29.79	QP	9.59	39.38	64.39	-25.01
2	0.246	32.07	QP	9.59	41.66	61.89	-20.23
3	0.406	23.69	QP	9.60	33.29	57.73	-24.44
4	3.062	20.77	QP	9.66	30.43	56.00	-25.57
*5	17.906	29.83	QP	9.96	39.79	60.00	-20.21
6	23.878	24.88	QP	10.02	34.90	60.00	-25.10

- 註： 1. “----”表示量測準峰值的結果符合平均值的限制值，則視為同時符合準峰值與平均值的限制值，不需再對其平均值進行量測。
 2. “#”表示干擾值太小，直接量取其峰值。
 3. 標記“***”表示為本地震盪頻率及其諧波。
 4. 量測不準確度: $\pm 2.5\text{dB}$ ($150\text{kHz} \leq f \leq 30\text{MHz}$)。

4.4.3 測試狀態: Mode E


File: 20-10-MAS-019 #25

Date: 2020/11/14

Temperature: 22 °C

Time: 上午 11:40:30

Humidity: 60 %

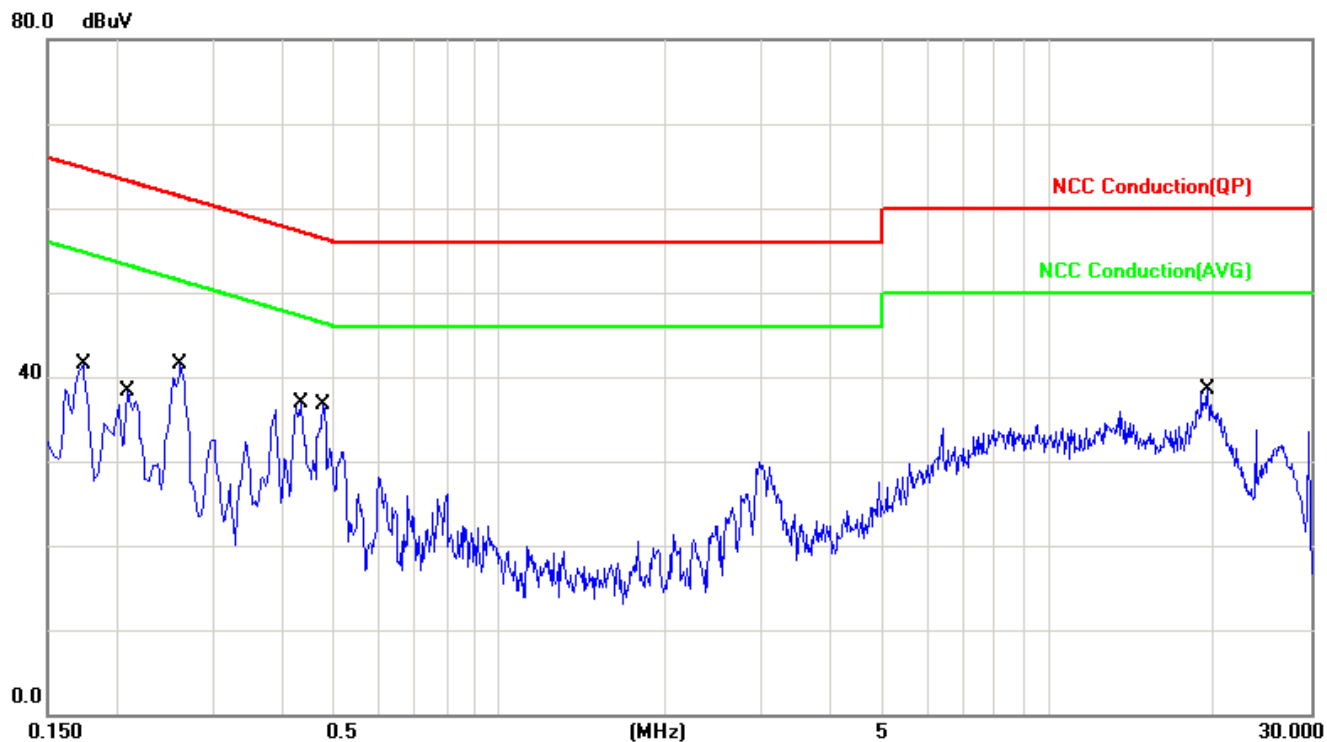

Site: CE04-10M 2F
 Condition: NCC Conduction(QP)
 EUT: Development Kit for PlayStation5
 Model: DFI-D1000AA
 Test Mode: Normal1
 Note: HDMI+USB+BT+LAN

Phase: L1
 Power: AC 110V/60Hz
 Operator: Phillip

No.	Frequency (MHz)	Reading (dBuV)	Detector	Corrected (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)
1	0.174	31.74	QP	9.66	41.40	64.77	-23.37
2	0.210	28.58	QP	9.65	38.23	63.21	-24.98
3	0.262	31.86	QP	9.65	41.51	61.37	-19.86
4	0.434	27.26	QP	9.66	36.92	57.18	-20.26
*5	0.478	27.13	QP	9.66	36.79	56.37	-19.58
6	19.482	28.55	QP	9.93	38.48	60.00	-21.52

- 註： 1. “---”表示量測準峰值的結果符合平均值的限制值，則視為同時符合準峰值與平均值的限制值，不需再對其平均值進行量測。
 2. “#”表示干擾值太小，直接量取其峰值。
 3. 標記“***”表示為本地震盪頻率及其諧波。
 4. 量測不準確度: $\pm 2.5\text{dB}(150\text{kHz} \leq f \leq 30\text{MHz})$ 。

File: 20-10-MAS-019


#26

Date: 2020/11/14

Temperature: 22 °C

Time: 上午 11:42:52

Humidity: 60 %

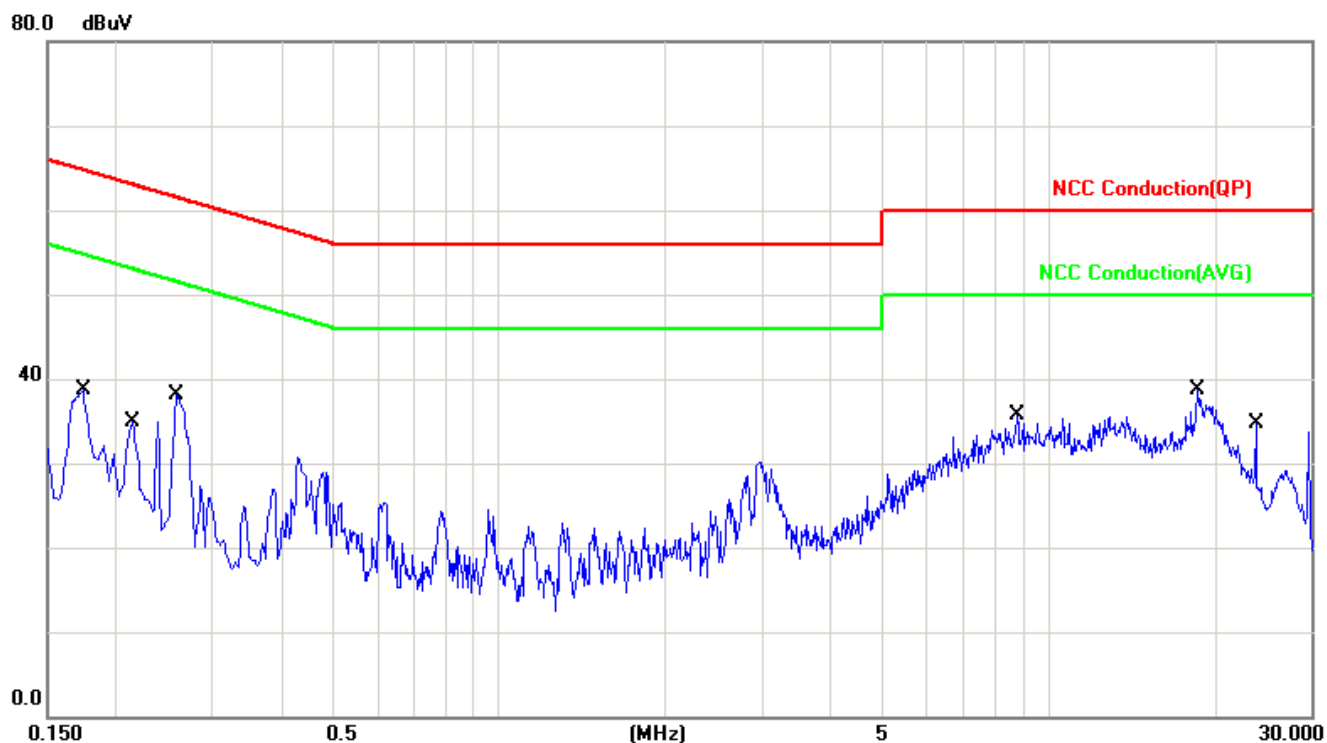

Site: CE04-10M 2F
 Condition: NCC Conduction(QP)
 EUT: Development Kit for PlayStation5
 Model: DFI-D1000AA
 Test Mode: Normal1
 Note: HDMI+USB+BT+LAN

Phase: N
 Power: AC 110V/60Hz
 Operator: Phillip

No.	Frequency (MHz)	Reading (dBuV)	Detector	Corrected (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)
1	0.174	29.07	QP	9.60	38.67	64.77	-26.10
2	0.214	25.28	QP	9.59	34.87	63.05	-28.18
3	0.258	28.42	QP	9.59	38.01	61.50	-23.49
4	8.754	25.97	QP	9.77	35.74	60.00	-24.26
*5	18.706	28.66	QP	9.97	38.63	60.00	-21.37
6	23.834	24.69	QP	10.02	34.71	60.00	-25.29

- 註： 1. “----”表示量測準峰值的結果符合平均值的限制值，則視為同時符合準峰值與平均值的限制值，不需再對其平均值進行量測。
 2. “#”表示干擾值太小，直接量取其峰值。
 3. 標記“***”表示為本地震盪頻率及其諧波。
 4. 量測不準確度: $\pm 2.5\text{dB}$ ($150\text{kHz} \leq f \leq 30\text{MHz}$)。

4.4.4 測試狀態: Mode F


File: 20-10-MAS-019 #28

Date: 2020/11/14

Temperature: 22 °C

Time: 上午 11:49:17

Humidity: 60 %

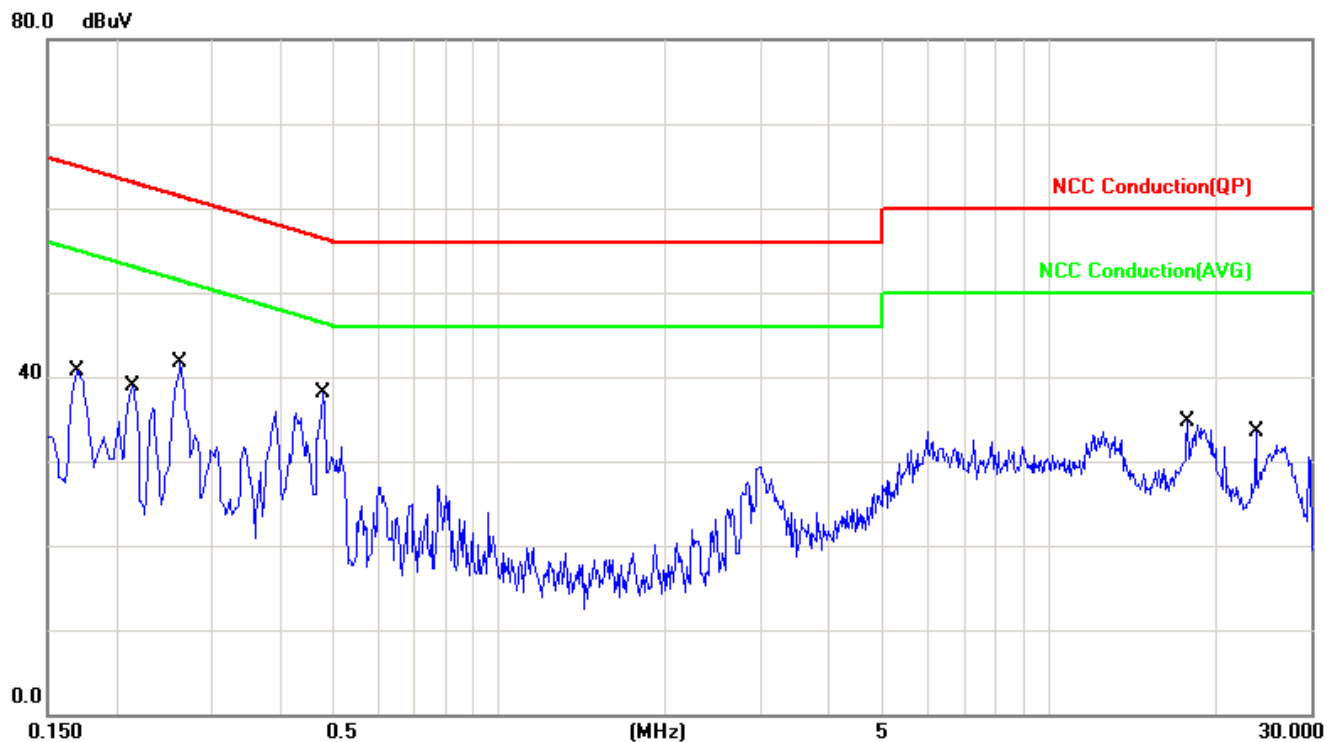

Site: CE04-10M 2F
 Condition: NCC Conduction(QP)
 EUT: Development Kit for PlayStation5
 Model: DFI-D1000AA
 Test Mode: Normal2
 Note: HDMI+USB+BT+WiFi

Phase: L1
 Power: AC 110V/60Hz
 Operator: Phillip

No.	Frequency (MHz)	Reading (dBuV)	Detector	Corrected (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)
1	0.170	31.12	QP	9.66	40.78	64.96	-24.18
2	0.214	29.19	QP	9.65	38.84	63.05	-24.21
3	0.262	32.03	QP	9.65	41.68	61.37	-19.69
*4	0.478	28.35	QP	9.66	38.01	56.37	-18.36
5	17.902	24.87	QP	9.91	34.78	60.00	-25.22
6	23.870	23.53	QP	9.93	33.46	60.00	-26.54

- 註： 1. “---”表示量測準峰值的結果符合平均值的限制值，則視為同時符合準峰值與平均值的限制值，不需再對其平均值進行量測。
 2. “#”表示干擾值太小，直接量取其峰值。
 3. 標記“***”表示為本地震盪頻率及其諧波。
 4. 量測不準確度: $\pm 2.5\text{dB}(150\text{kHz} \leq f \leq 30\text{MHz})$ 。

File: 20-10-MAS-019


#27

Date: 2020/11/14

Temperature: 22 °C

Time: 上午 11:47:41

Humidity: 60 %

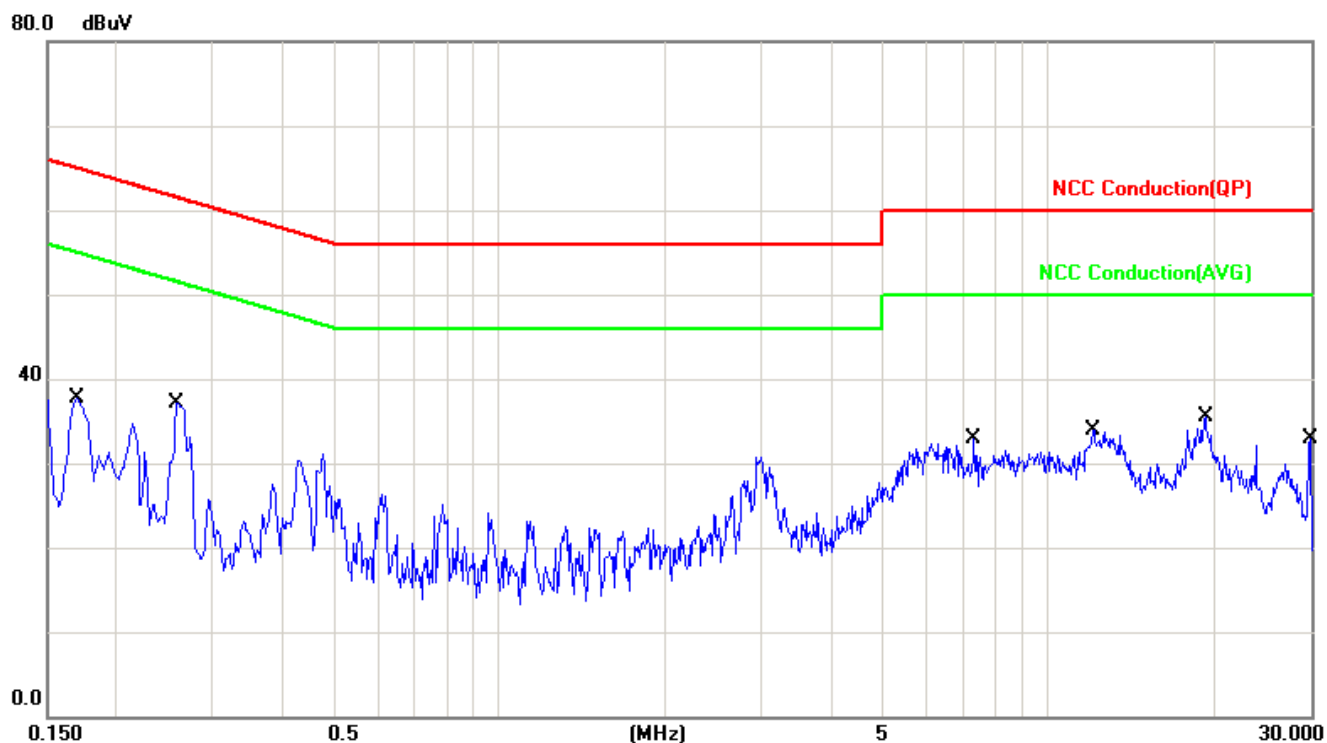

Site: CE04-10M 2F
 Condition: NCC Conduction(QP)
 EUT: Development Kit for PlayStation5
 Model: DFI-D1000AA
 Test Mode: Normal2
 Note: HDMI+USB+BT+WiFi


Phase: N
 Power: AC 110V/60Hz
 Operator: Phillip

No.	Frequency (MHz)	Reading (dBuV)	Detector	Corrected (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)
1	0.170	28.06	QP	9.60	37.66	64.96	-27.30
*2	0.258	27.55	QP	9.59	37.14	61.50	-24.36
3	7.294	23.16	QP	9.74	32.90	60.00	-27.10
4	12.038	24.16	QP	9.84	34.00	60.00	-26.00
5	19.306	25.44	QP	9.99	35.43	60.00	-24.57
6	29.842	22.86	QP	10.04	32.90	60.00	-27.10

- 註： 1. “----”表示量測準峰值的結果符合平均值的限制值，則視為同時符合準峰值與平均值的限制值，不需再對其平均值進行量測。
 2. “#”表示干擾值太小，直接量取其峰值。
 3. 標記“***”表示為本地震盪頻率及其諧波。
 4. 量測不準確度: $\pm 2.5\text{dB}$ ($150\text{kHz} \leq f \leq 30\text{MHz}$)。

4.5 電源線傳導干擾之測試配置

圖 1

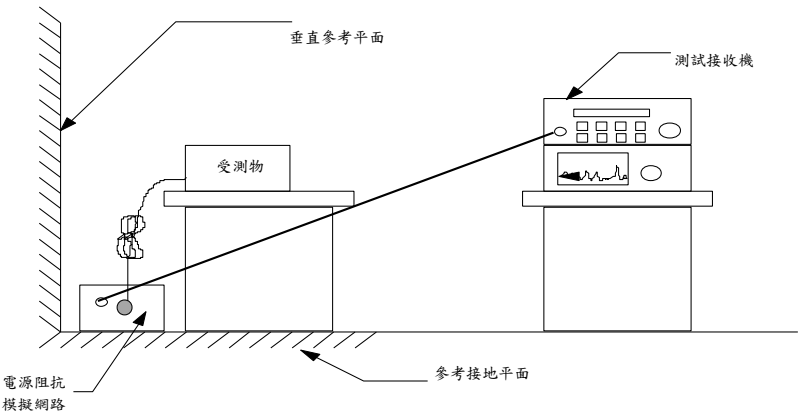

4.6 傳導量測之配置照片

請參考產品照片

5 天線增益之要求

5.1 適用標準

對使用跳頻技術之低功率射頻器材，依據國家通訊傳播委員會低功率射頻器材技術規範4.10.1.3之規定，

(1)操作於2400 MHz～2483.5 MHz 頻段：

(A)進行固定式點對點操作時，其發射天線之方向性增益超過6 dBi，每超過3 dBi，最大傳導輸出功率限制值應降低1 dB。

(B)天線以多向波束發射方式(含同時發射或循序發射)將訊號導向多個接收機或接收機群組時，應符合下列規定：

(a)非同時發射多向波束者，所有載波或頻道傳輸至所有天線陣列或陣列群之總和傳導輸出功率應符合4.10.1.2 之功率限制值。如天線/天線陣列群之方向性增益超過6 dBi，每超過3 dBi，總和傳導輸出功率限制值應降低1 dB。方向性增益值應計算如下：

(i)方向性增益值= $10\log(\text{天線陣列之單元數目}) + \text{各單元中最高之方向性增益值}$ 。

(ii)天線陣列間之遮蔽效應或波束干涉損失能充分佐證時，方向性增益得低於(i)計算數值。

(b)同時發射多向波束於相同或不同頻道者，其每一波束功率應符合(a)之功率限制值。如發射波束有重疊現象，功率應降低，以確保總和傳導輸出功率符合(a)之限制值。同時發射的所有波束總和傳導輸出功率不大於(a) 總和傳導輸出功率限制值加8 dB。方向性增益值計算同(a)。

(3)除(1)及(2)外，使用超過6 dBi 方向增益之發射天線時，應依超過6 dBi天線方向增益的dBi 總量，等量減少最大傳導輸出功率限制值。

5.2 天線增益

此裝置內含兩個 Bluetooth module 使用內接式天線，其天線資料如下：

BT Module1

廠牌: LUXSHARE-ICT

型號: L34RF049

Antenna Type	IFA
Operation Frequency Range	2400~2500 MHz
Antenna Gain	3 dBi

BT Module2

廠牌: LUXSHARE-ICT

型號: L34RF050

Antenna Type	IFA
Operation Frequency Range	2400~2500 MHz
Antenna Gain	4 dBi

(參照天線規格資料)

5.3 結果判定

天線之方向性增益皆低於6dBi，因此無需減少峰值輸出功率之限制值。

6 輸出峰值功率之量測

6.1 適用標準

依據國家通訊傳播委員會低功率射頻器材技術規範4.10.1.2節之(1)(A)及(B)規定，操作於2400-2483.5兆赫(MHz)者：


(A) 至少使用75個跳頻頻道之跳頻系統:1 W(含)以下。

(B) 除(A)外，依國家通訊傳播委員會低功率射頻器材技術規範4.10.1.6之(1)(A)(a)之跳頻系統:0.125 W(含)以下。

除使用附件二之峰值輸出功率測量方式外，並得使用以最大傳導輸出功率(Maximum Conducted Output Power)作為測量方式。

6.2 輸出功率之測試配置

圖 2: 輸出峰值功率之測試配置



6.3 輸出功率之量測儀器

儀器名稱	製造者	型 號
Spectrum Analyzer	R&S	FSV
Attenuator	WEINSCHEL	56-10

測試軟體: LZ-RF (Ver. ETC-3A2)

6.4 輸出功率之量測結果

測試工程師: 羅世勇

測試日期: Oct. 08, 2020

環境溫度: 24°C

環境濕度: 53%

6.4.1 BT_Module1

6.4.1.1 測試狀態: NON-EDR

頻率	峰值輸出功率 (dBm)	峰值輸出功率 (mW)	限制值 (mW)	Chart
2402	0.94	1.24	125	Page 25
2441	0.94	1.24	125	Page 26
2480	0.77	1.19	125	Page 27

註：1. 繪圖資料請參考第25-27頁。

2. 峰值輸出功率為經儀器校正補償過後的結果值。

3. 量測不準確度: +1.44dB/ -1.45dB。

File: 20-10-MAS-019_BT1


#1

Date: 2020/10/8

Temperature: 24 °C

Site: RF-Cond01

Humidity: 53 %

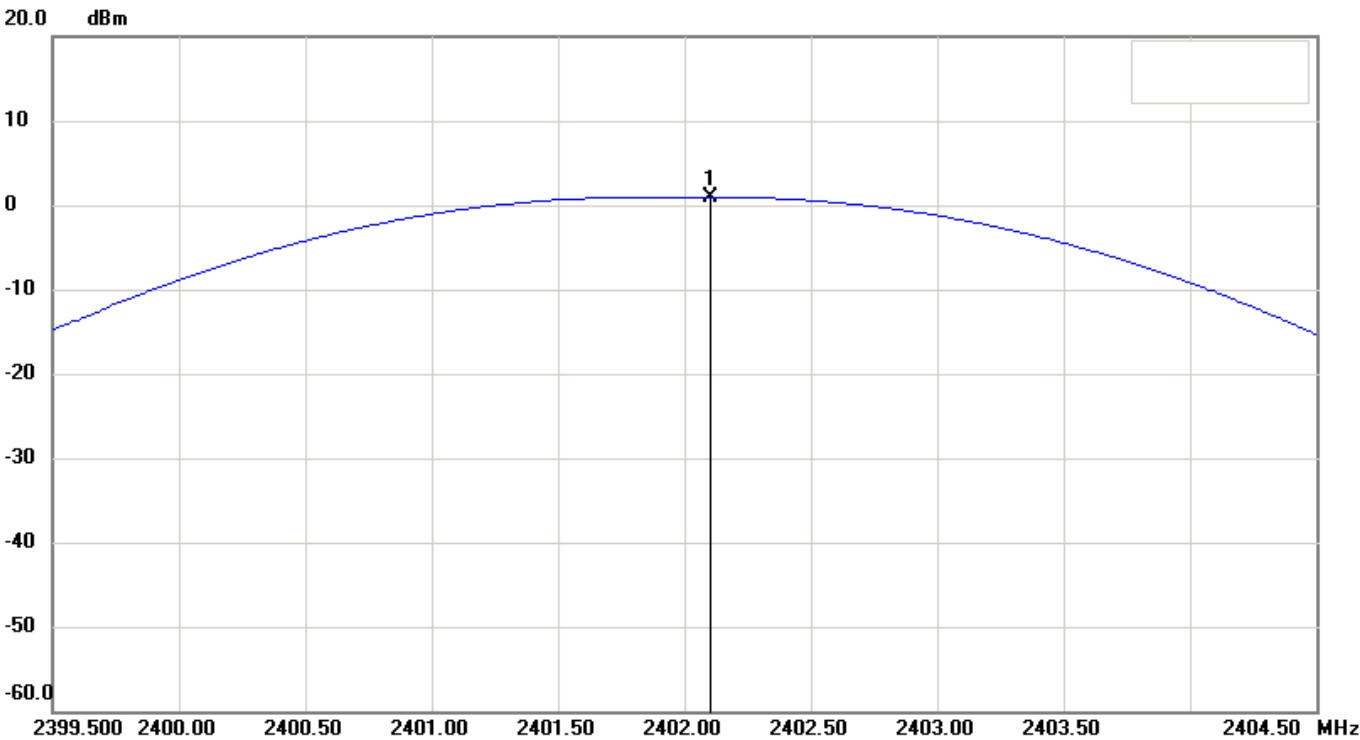

Condition:

EUT: Development Kit for PlayStation5

Model: DFI-D1000AA

Test Mode: BT

Note: NCC_LP0002_BT CH00 Output Power (NON-EDR)

RF Conducted

Sweep Time: 1ms

RBW: 2000 KHz

Operator:

Att.: 25dB

VBW: 2000 KHz

Phillip

No.	Frequency(MHz)	Level(dBm)
1	2402.10000	0.94

File: 20-10-MAS-019_BT1


#9

Date: 2020/10/8

Temperature: 24 °C

Site: RF-Cond01

Humidity: 53 %

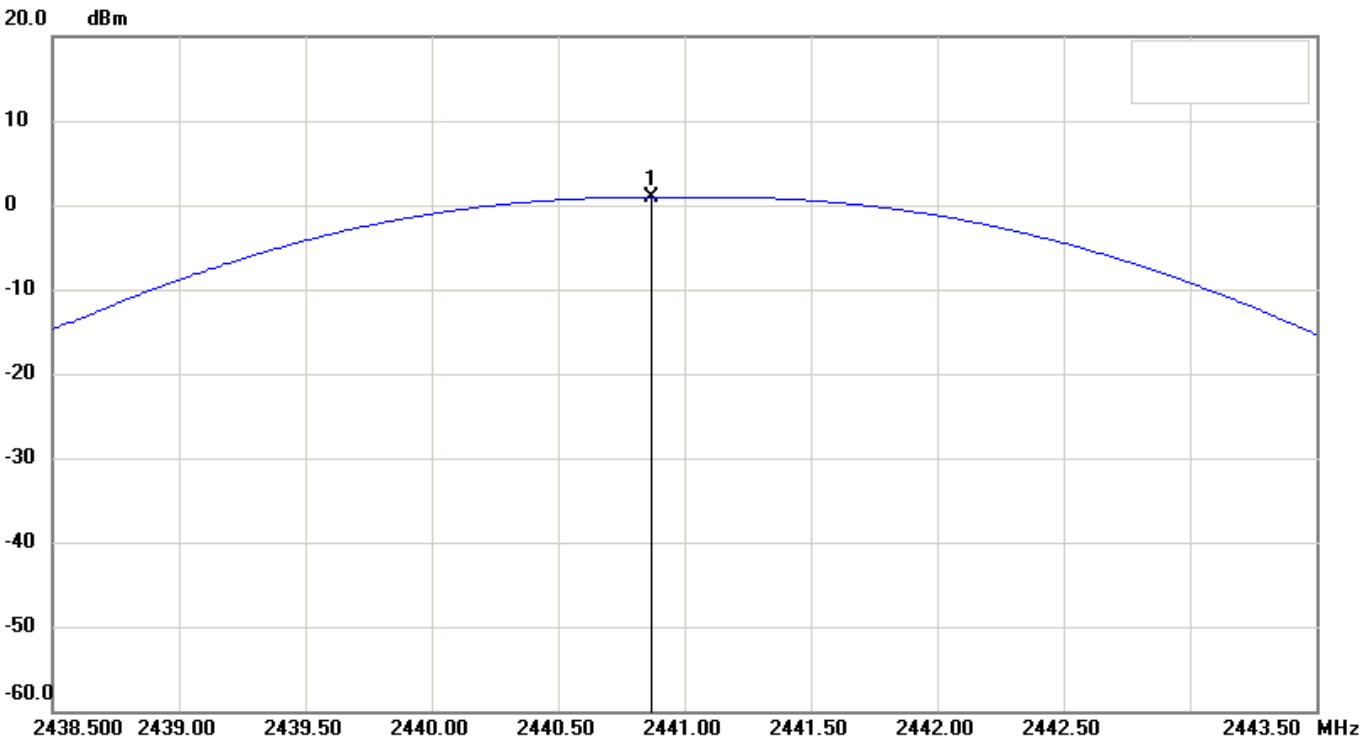

Condition:

EUT: Development Kit for PlayStation5

Model: DFI-D1000AA

Test Mode: BT

Note: NCC_LP0002_BT CH39 Output Power (NON-EDR)

RF Conducted

Sweep Time: 1ms

RBW: 2000 KHz

Operator:

Att.: 25dB

VBW: 2000 KHz

Phillip

No.	Frequency(MHz)	Level(dBm)
1	2440.87000	0.94

File: 20-10-MAS-019_BT1


#5

Date: 2020/10/8

Temperature: 24 °C

Site: RF-Cond01

Humidity: 53 %

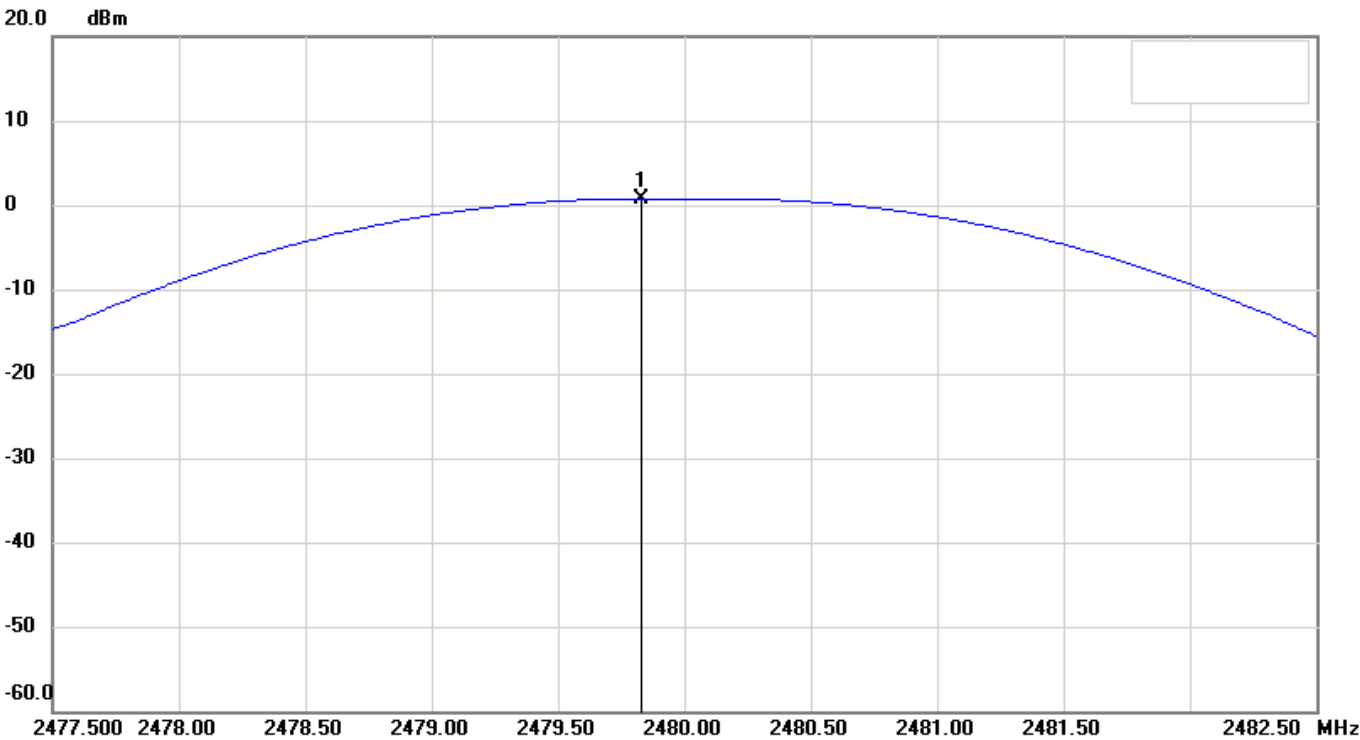

Condition:

EUT: Development Kit for PlayStation5

Model: DFI-D1000AA

Test Mode: BT

Note: NCC_LP0002_BT CH78 Output Power (NON-EDR)

RF Conducted

Sweep Time: 1ms

RBW: 2000 KHz

Operator:

Att.: 25dB

VBW: 2000 KHz

Phillip

No.	Frequency(MHz)	Level(dBm)
1	2479.83000	0.77

6.4.1.2 測試狀態: EDR

頻率	峰值輸出功率 (dBm)	峰值輸出功率 (mW)	限制值 (mW)	Chart
2402	3.52	2.25	125	Page 29
2441	3.47	2.22	125	Page 30
2480	3.34	2.16	125	Page 31

- 註：1. 繪圖資料請參考第29-31頁。
2. 峰值輸出功率為經儀器校正補償過後的結果值。
3. 量測不準確度: +1.44dB/ -1.45dB。


File: 20-10-MAS-019_BT1
 Site: RF-Cond01

#24

Date: 2020/10/8

Temperature: 24 °C

Humidity: 53 %

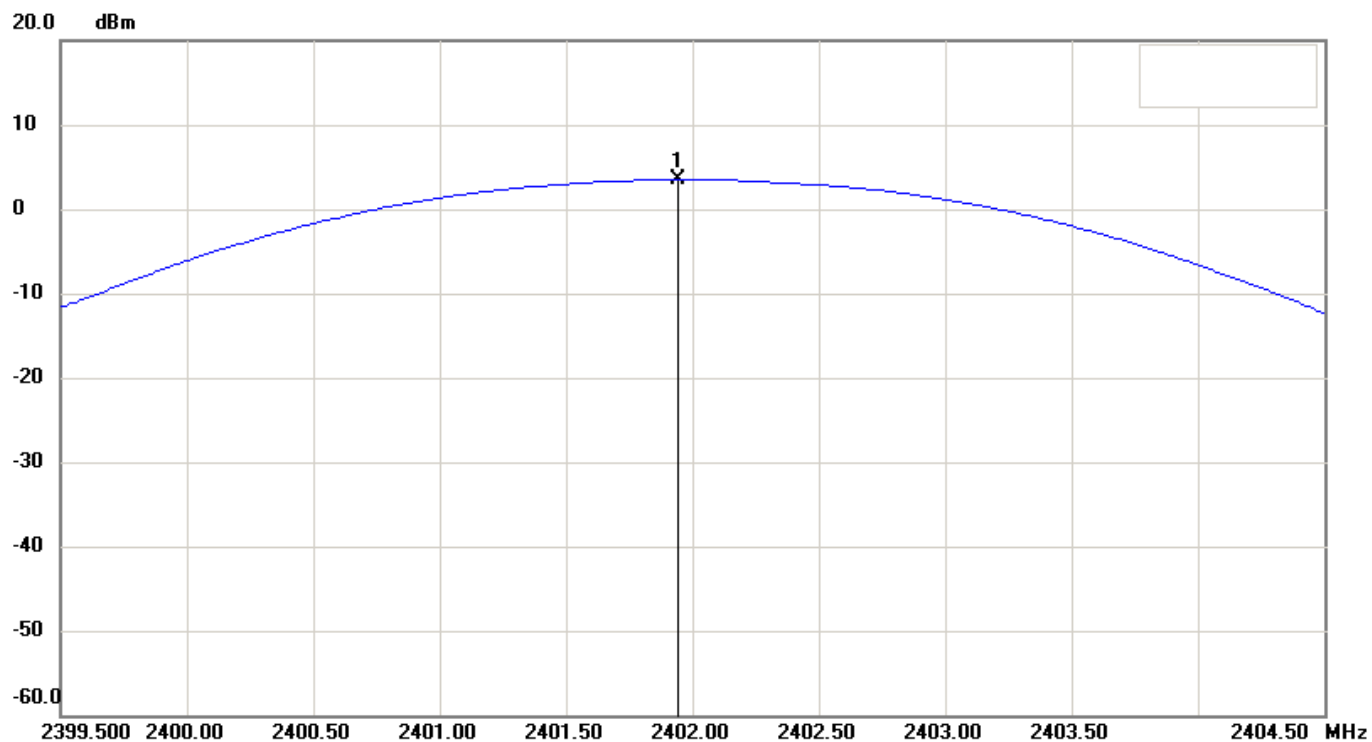**Condition:**

EUT: Development Kit for PlayStation5
 Model: DFI-D1000AA
 Test Mode: BT
 Note: NCC_LP0002_BT CH00 Output Power (EDR)

RF Conducted

Sweep Time: 1ms Att.: 25dB
 RBW: 2000 KHz VBW: 2000 KHz
 Operator: Phillip

No.	Frequency(MHz)	Level(dBm)
1	2401.94000	3.52


File: 20-10-MAS-019_BT1
Site: RF-Cond01

#32

Date: 2020/10/8

Temperature: 24 °C

Humidity: 53 %

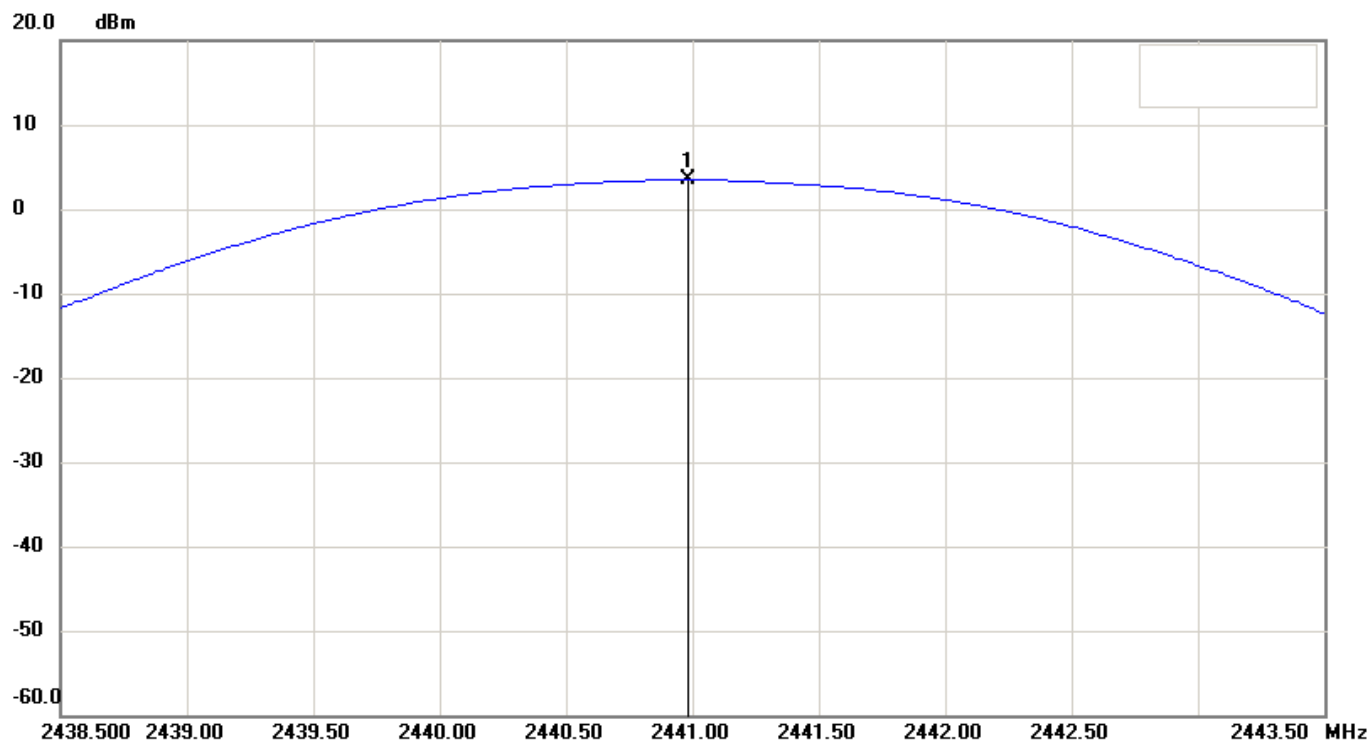**Condition:**

EUT: Development Kit for PlayStation5
Model: DFI-D1000AA
Test Mode: BT
Note: NCC_LP0002_BT CH39 Output Power (EDR)

RF Conducted

Sweep Time: 1ms Att.: 25dB
RBW: 2000 KHz VBW: 2000 KHz
Operator: Phillip

No.	Frequency(MHz)	Level(dBm)
1	2440.98000	3.47

File: 20-10-MAS-019_BT1


#28

Date: 2020/10/8

Temperature: 24 °C

Site: RF-Cond01

Humidity: 53 %

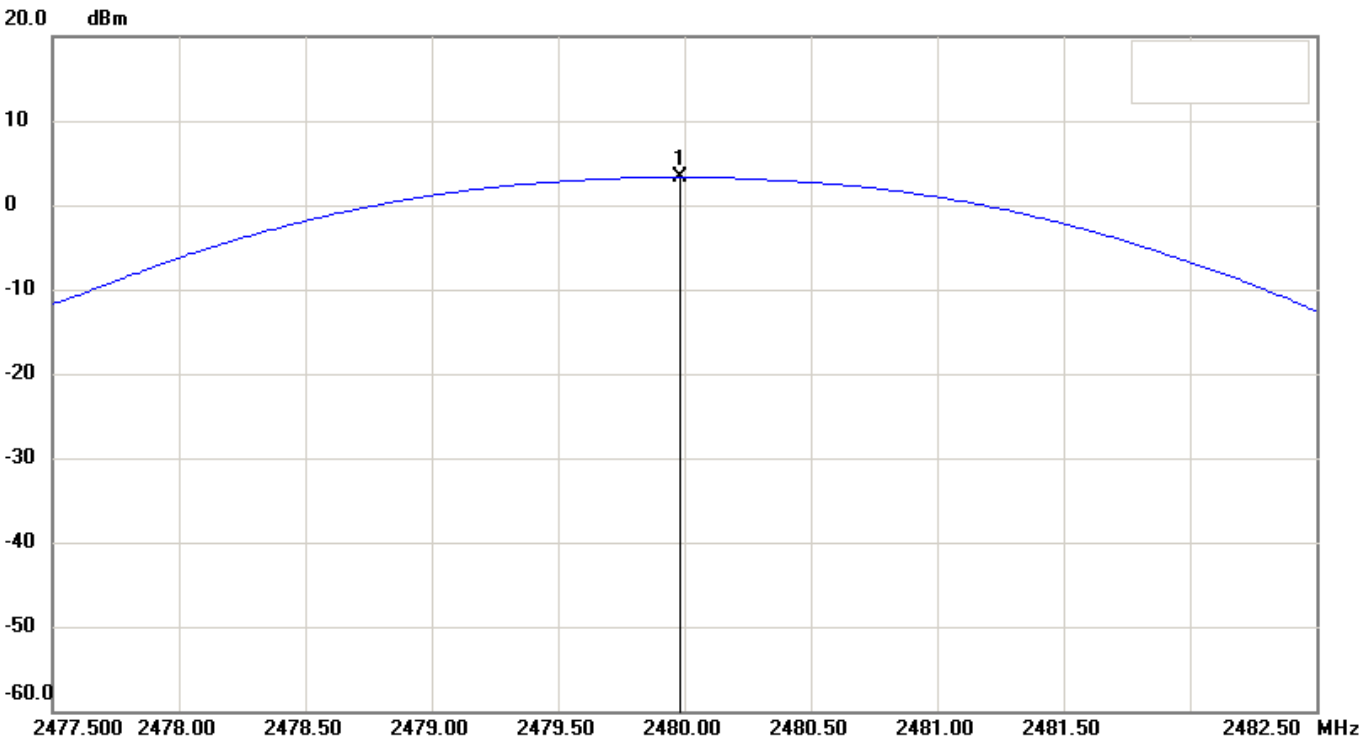

Condition:

EUT: Development Kit for PlayStation5

Model: DFI-D1000AA

Test Mode: BT

Note: NCC_LP0002_BT CH78 Output Power (EDR)

RF Conducted

Sweep Time: 1ms Att.: 25dB

RBW: 2000 KHz VBW: 2000 KHz

Operator: Phillip

No.	Frequency(MHz)	Level(dBm)
1	2479.98000	3.34

6.4.2 BT_Module2

6.4.2.1 測試狀態: NON-EDR

頻率	峰值輸出功率 (dBm)	峰值輸出功率 (mW)	限制值 (mW)	Chart
2402	0.71	1.18	125	Page 33
2441	0.61	1.15	125	Page 34
2480	0.31	1.07	125	Page 35

註：1. 繪圖資料請參考第33-35頁。

2. 峰值輸出功率為經儀器校正補償過後的結果值。

3. 量測不準確度: +1.44dB/ -1.45dB。

File: 20-10-MAS-019_BT2


#1

Date: 2020/10/8

Temperature: 24 °C

Site: RF-Cond01

Humidity: 53 %

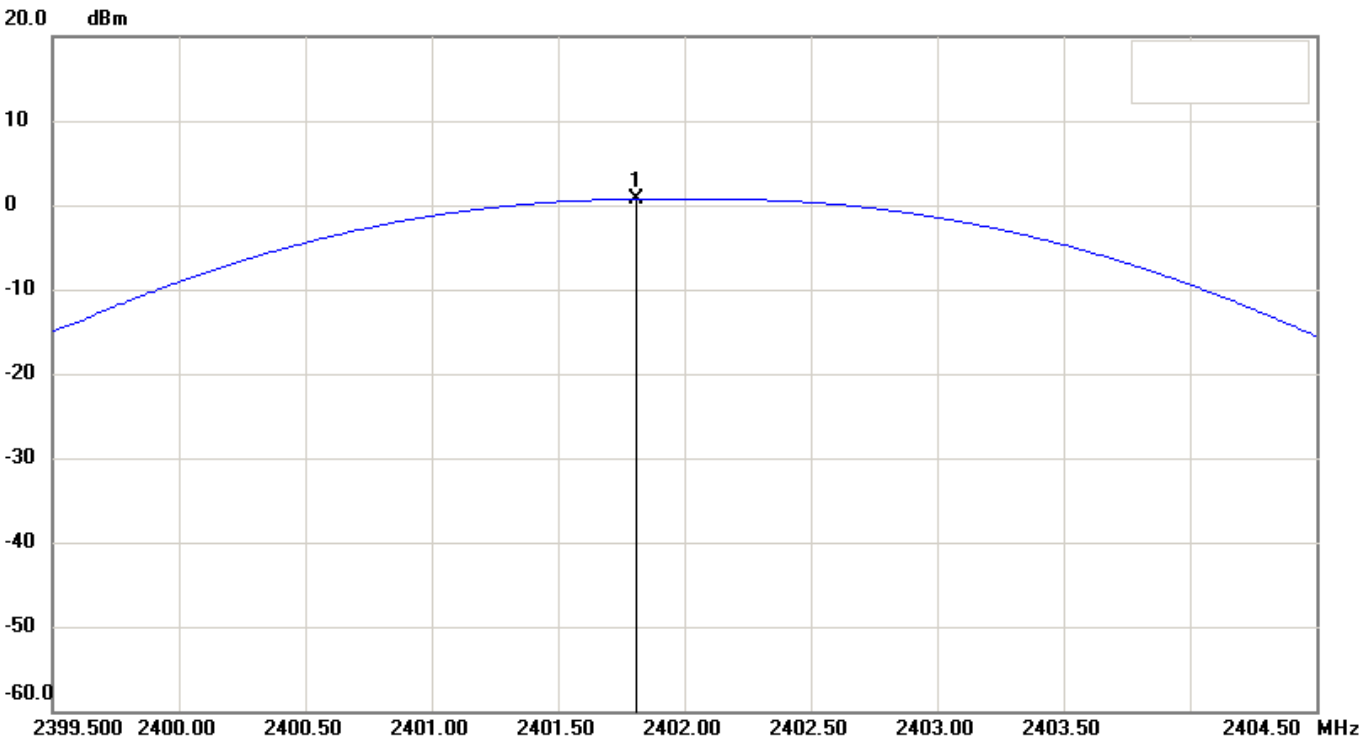

Condition:

EUT: Development Kit for PlayStation5

Model: DFI-D1000AA

Test Mode: BT

Note: NCC_LP0002_BT CH00 Output Power (NON-EDR)

RF Conducted

Sweep Time: 1ms

RBW: 2000 KHz

Operator:

Att.: 25dB

VBW: 2000 KHz

Phillip

No.	Frequency(MHz)	Level(dBm)
1	2401.81000	0.71

File: 20-10-MAS-019_BT2


#9

Date: 2020/10/8

Temperature: 24 °C

Site: RF-Cond01

Humidity: 53 %

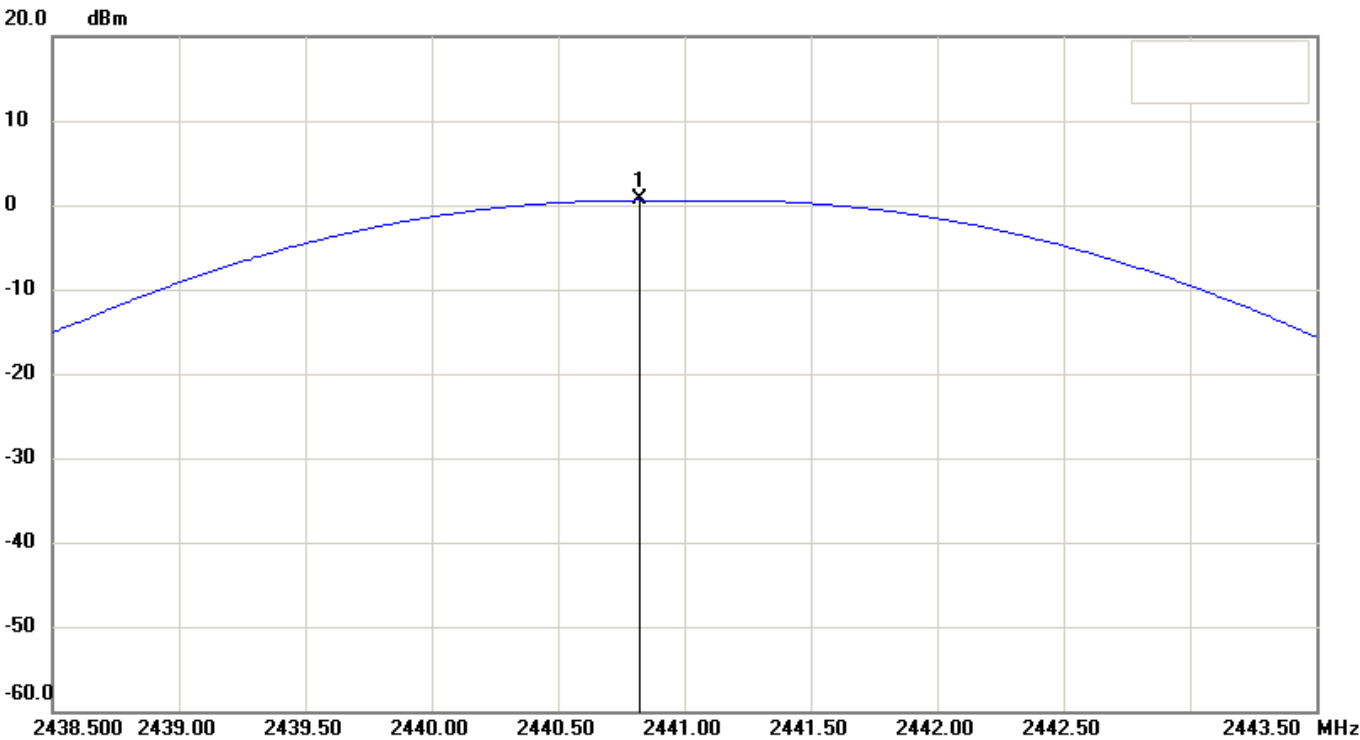

Condition:

EUT: Development Kit for PlayStation5

Model: DFI-D1000AA

Test Mode: BT

Note: NCC_LP0002_BT CH39 Output Power (NON-EDR)

RF Conducted

Sweep Time: 1ms

RBW: 2000 KHz

Operator:

Att.: 25dB

VBW: 2000 KHz

Phillip

No.	Frequency(MHz)	Level(dBm)
1	2440.82000	0.61

File: 20-10-MAS-019_BT2


#5

Date: 2020/10/8

Temperature: 24 °C

Site: RF-Cond01

Humidity: 53 %

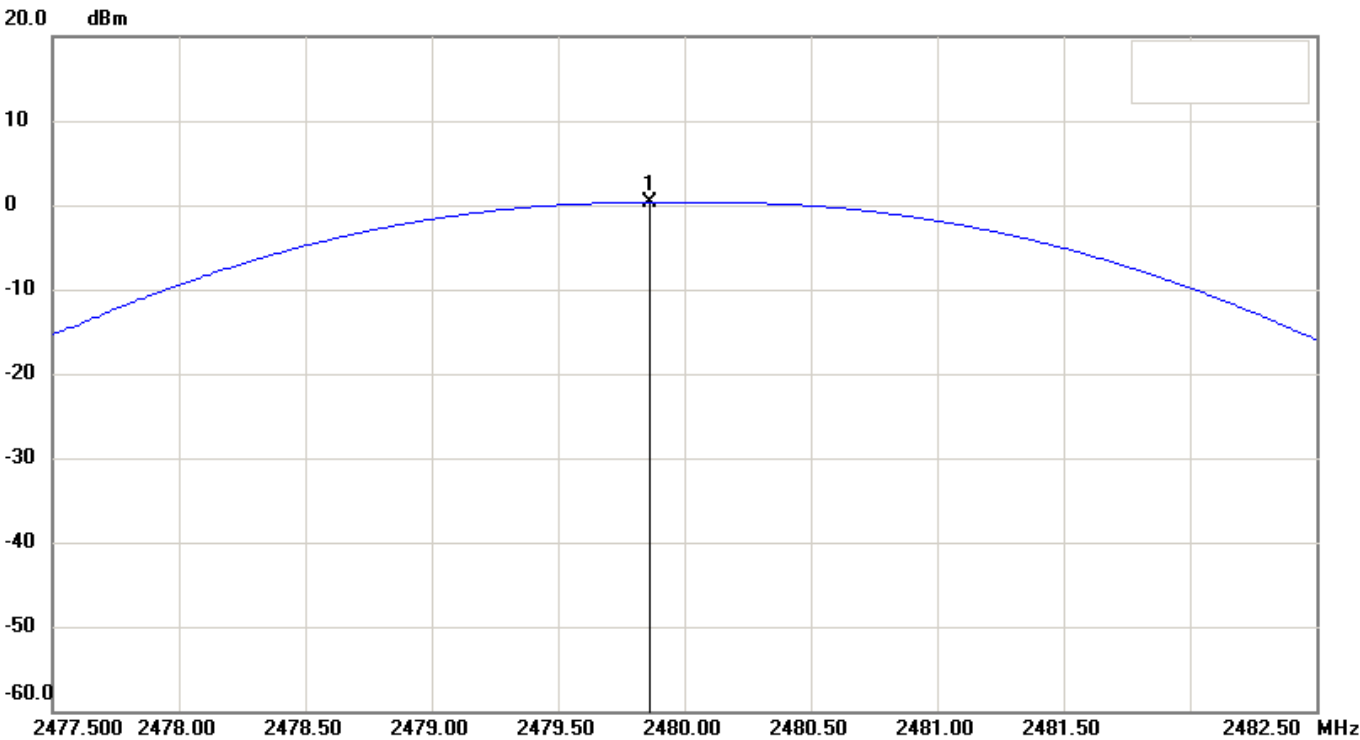

Condition:

EUT: Development Kit for PlayStation5

Model: DFI-D1000AA

Test Mode: BT

Note: NCC_LP0002_BT CH78 Output Power (NON-EDR)

RF Conducted

Sweep Time: 1ms

RBW: 2000 KHz

Operator:

Att.: 25dB

VBW: 2000 KHz

Phillip

No.	Frequency(MHz)	Level(dBm)
1	2479.86000	0.31

6.4.2.2 測試狀態: EDR

頻率	峰值輸出功率 (dBm)	峰值輸出功率 (mW)	限制值 (mW)	Chart
2402	3.23	2.10	125	Page 37
2441	3.08	2.03	125	Page 38
2480	2.78	1.90	125	Page 39

註：1. 繪圖資料請參考第37-39頁。

2. 峰值輸出功率為經儀器校正補償過後的結果值。

3. 量測不準確度: +1.44dB/ -1.45dB。

6.5 結果判定

高、中、低頻段所有傳輸速率的峰值輸出功率皆低於 125 mW，符合標準規定。

File: 20-10-MAS-019_BT2


#24

Date: 2020/10/8

Temperature: 24 °C

Site: RF-Cond01

Humidity: 53 %

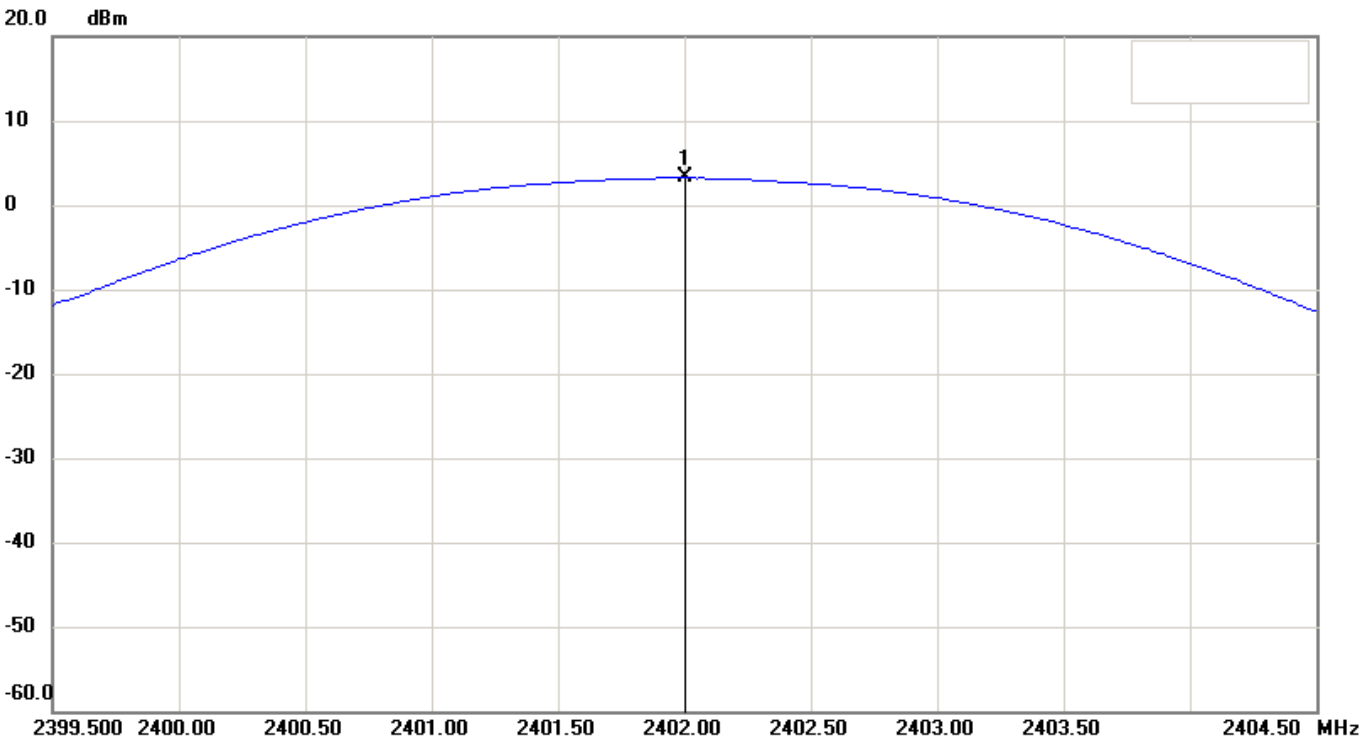

Condition:

EUT: Development Kit for PlayStation5

Model: DFI-D1000AA

Test Mode: BT

Note: NCC_LP0002_BT CH00 Output Power (EDR)

RF Conducted

Sweep Time: 1ms Att.: 25dB

RBW: 2000 KHz VBW: 2000 KHz

Operator: Phillip

No.	Frequency(MHz)	Level(dBm)
1	2402.00000	3.23


File: 20-10-MAS-019_BT2
 Site: RF-Cond01

#32

Date: 2020/10/8

Temperature: 24 °C

Humidity: 53 %

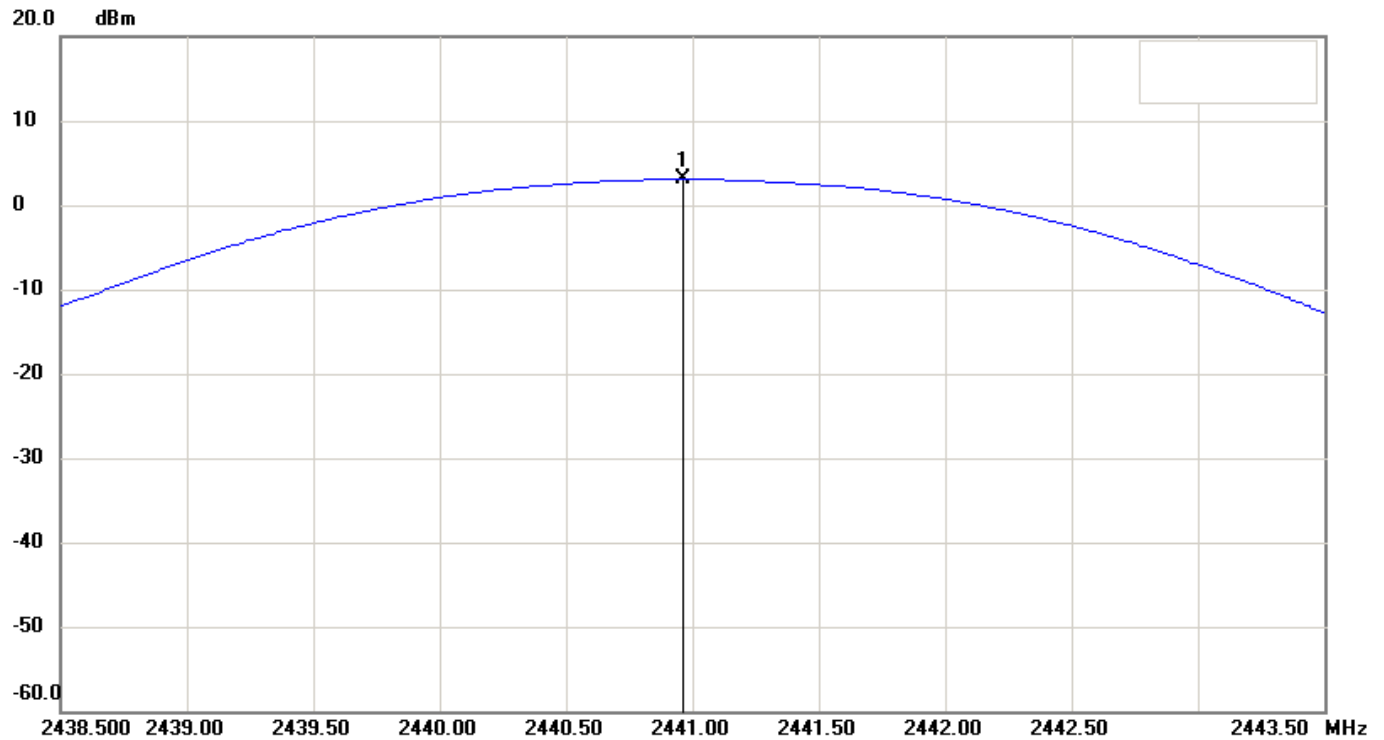**Condition:**

EUT: Development Kit for PlayStation5
 Model: DFI-D1000AA
 Test Mode: BT
 Note: NCC_LP0002_BT CH39 Output Power (EDR)

RF Conducted

Sweep Time: 1ms Att.: 25dB
 RBW: 2000 KHz VBW: 2000 KHz
 Operator: Phillip

No.	Frequency(MHz)	Level(dBm)
1	2440.96000	3.08

File: 20-10-MAS-019_BT2


#28

Date: 2020/10/8

Temperature: 24 °C

Site: RF-Cond01

Humidity: 53 %

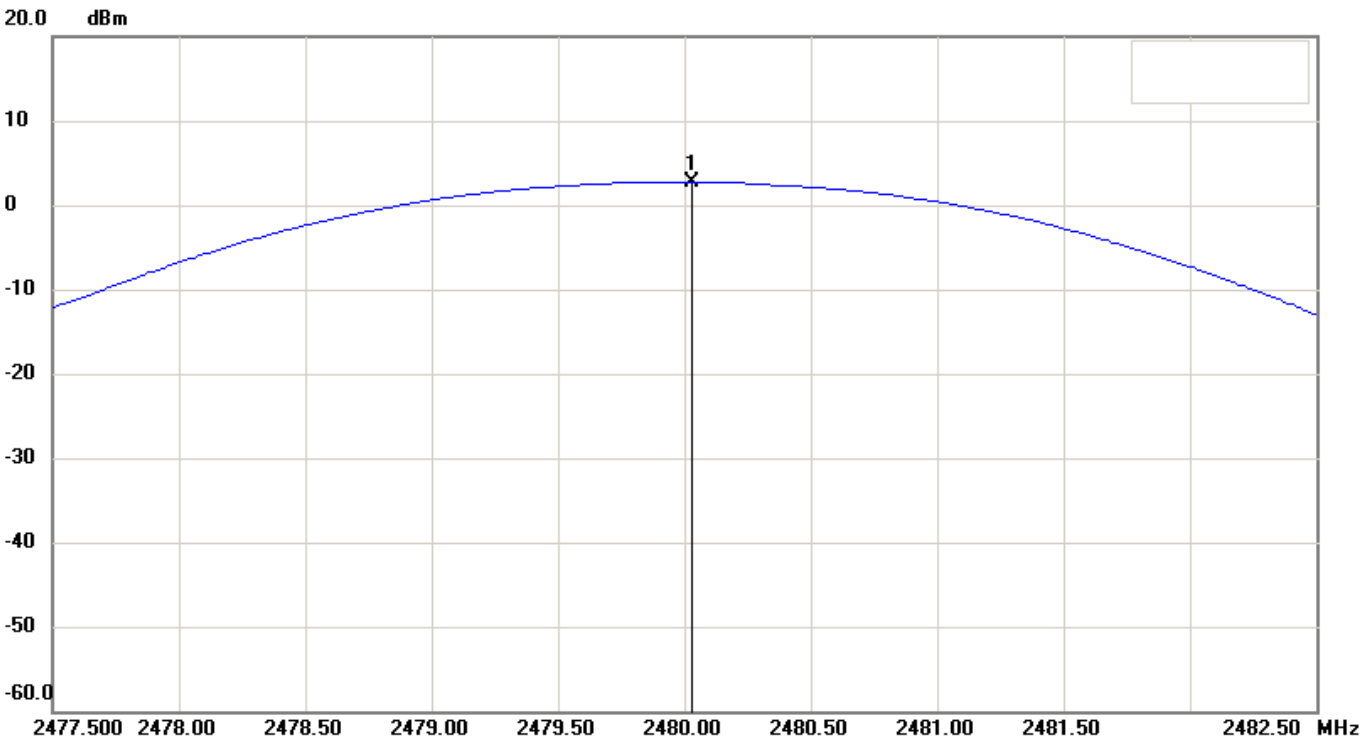

Condition:

EUT: Development Kit for PlayStation5

Model: DFI-D1000AA

Test Mode: BT

Note: NCC_LP0002_BT CH78 Output Power (EDR)

RF Conducted

Sweep Time: 1ms Att.: 25dB

RBW: 2000 KHz VBW: 2000 KHz

Operator: Phillip

No.	Frequency(MHz)	Level(dBm)
1	2480.03000	2.78

7 開放頻帶外之量測

7.1 適用標準

依據國家通訊傳播委員會低功率射頻器材技術規範4.10.1.5節之規定，操作頻帶範圍外之任意100 kHz內，發射器所產生的射頻功率相較於使用頻帶範圍中包含最高所需功率之100 kHz內的射頻功率，其衰減值限制如下：

(1) 輸出功率以附件二之峰值輸出功率方式測量者，至少須衰減20 dB，可使用射頻傳導或輻射方式測量。

(2) 輸出功率以4.10.1.2(1)(C)之最大傳導輸出功率測量方式者，至少須衰減30 dB。

此外，落於第 3.5節禁用頻段之輻射發射，應符合第 3.6節之規定。

7.2 開放頻帶邊緣之測試配置

如圖 2 所示。

7.3 量測開放頻帶邊緣之儀器

儀器名稱	製造者	型 號
Spectrum Analyzer	R&S	FSV
Attenuator	WEINSCHEL	56-10

測試軟體: LZ-RF (Ver. ETC-3A2)

7.4 開放頻帶邊緣之量測結果

測試工程師: 羅世勇

測試日期: Oct. 08, 2020

環境溫度: 24°C

環境濕度: 53%

7.4.1 BT_Module1

7.4.1.1 測試狀態: NON-EDR

a. 下邊緣頻帶：距下頻帶邊緣40MHz內最大混附波產生於 2399.440 MHz，比主波低 20dB以上，合乎標準規定。

b. 上邊緣頻帶：距上頻帶邊緣40MHz內最大混附波產生於 2487.548 MHz，比主波低 20dB以上，合乎標準規定。

註：1. 繪圖資料請參考第41-47頁。

2. 量測不準確度: +1.44dB / -1.45dB。


File: 20-10-MAS-019_BT1
Site: RF-Cond01

#4

Date: 2020/10/8

Temperature: 24 °C

Humidity: 53 %

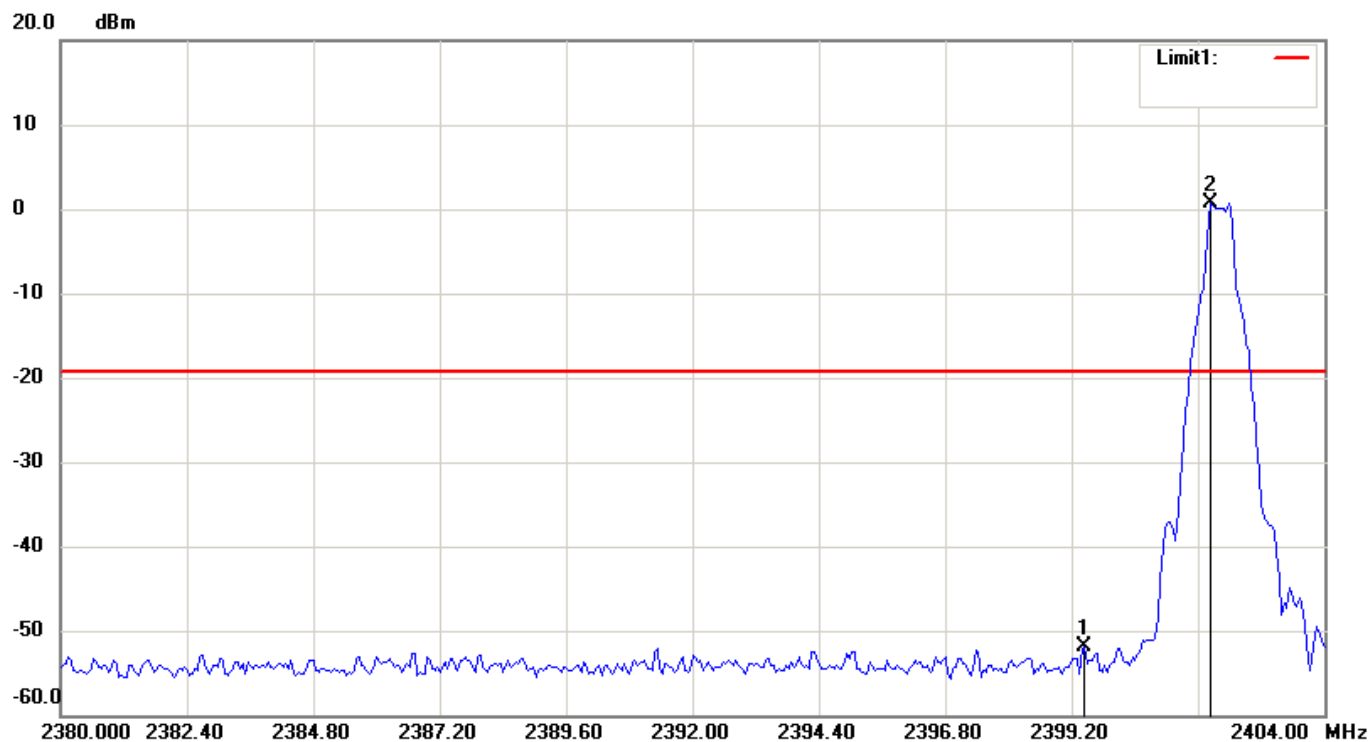

Condition: -19.32dBm
EUT: Development Kit for PlayStation5
Model: DFI-D1000AA
Test Mode: BT
Note: NCC_LP0002_BT CH00-Bandedge (Fixed)

RF Conducted
Sweep Time: 1.01ms Att.: 25dB
RBW: 100 KHz VBW: 300 KHz
Operator: Phillip

No.	Frequency(MHz)	Level(dBm)
1	2399.44000	-51.86
2	2401.84000	0.68


File: 20-10-MAS-019_BT1
Site: RF-Cond01

#12

Date: 2020/10/8

Temperature: 24 °C

Humidity: 53 %

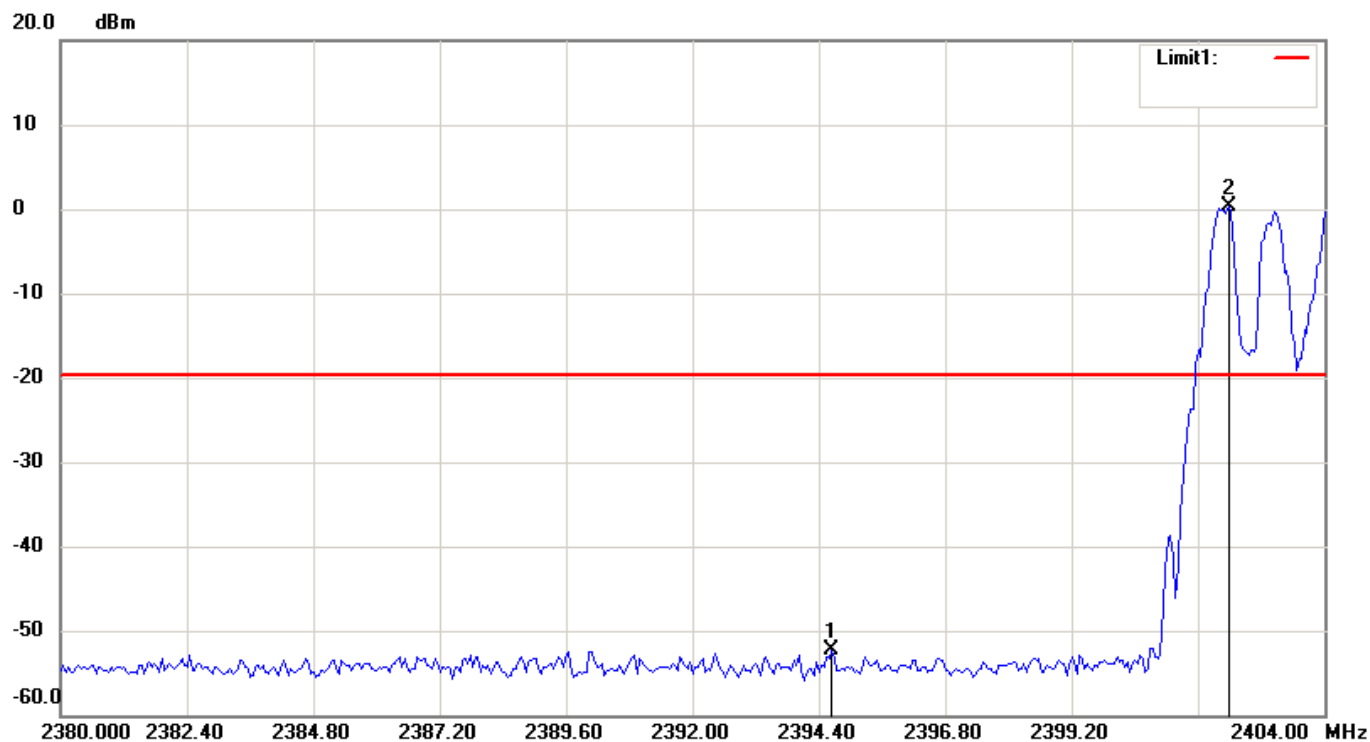

Condition: -19.72dBm
EUT: Development Kit for PlayStation5
Model: DFI-D1000AA
Test Mode: BT
Note: NCC_LP0002_BT CH00-Bandedge (Hopping)

RF Conducted
Sweep Time: 1.01ms Att.: 25dB
RBW: 100 KHz VBW: 300 KHz
Operator: Phillip

No.	Frequency(MHz)	Level(dBm)
1	2394.64000	-52.35
2	2402.17600	0.28


File: 20-10-MAS-019_BT1
Site: RF-Cond01

#8

Date: 2020/10/8

Temperature: 24 °C

Humidity: 53 %

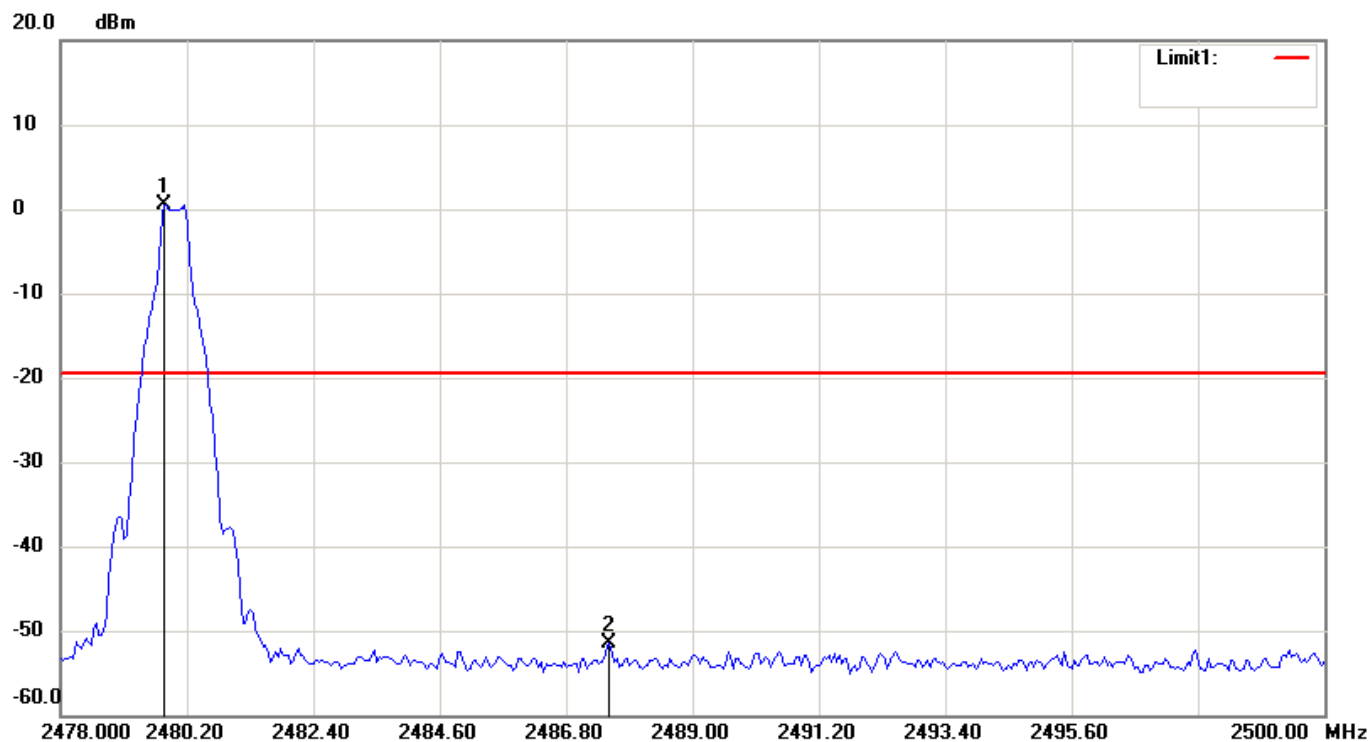

Condition: -19.47dBm
EUT: Development Kit for PlayStation5
Model: DFI-D1000AA
Test Mode: BT
Note: NCC_LP0002_BT CH78-Bandedge (Fixed)

RF Conducted
Sweep Time: 1.02ms Att.: 25dB
RBW: 100 KHz VBW: 300 KHz
Operator: Phillip

No.	Frequency(MHz)	Level(dBm)
1	2479.80400	0.53
2	2487.54800	-51.59


File: 20-10-MAS-019_BT1
Site: RF-Cond01

#13

Date: 2020/10/8

Temperature: 24 °C

Humidity: 53 %

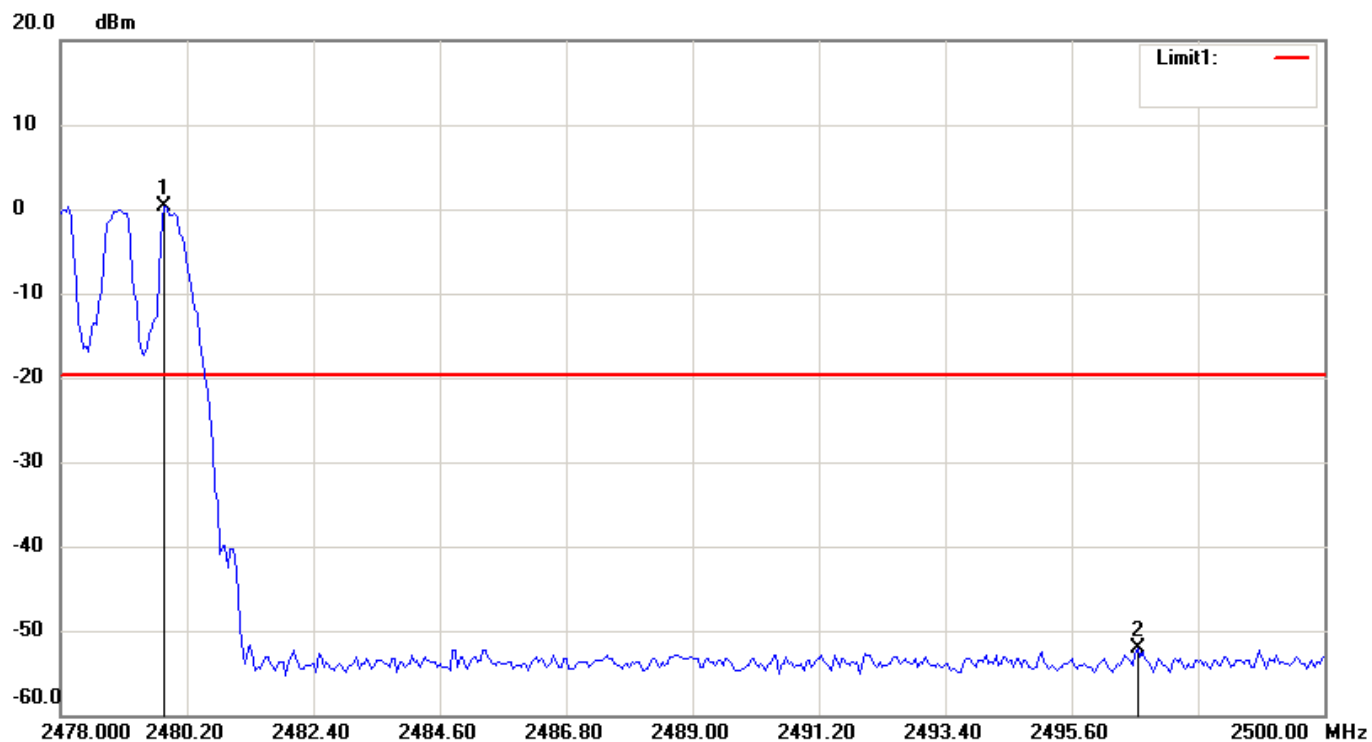

Condition: -19.65dBm
EUT: Development Kit for PlayStation5
Model: DFI-D1000AA
Test Mode: BT
Note: NCC_LP0002_BT CH78-Bandedge (Hopping)

RF Conducted
Sweep Time: 1.02ms Att.: 25dB
RBW: 100 KHz VBW: 300 KHz
Operator: Phillip

No.	Frequency(MHz)	Level(dBm)
1	2479.80400	0.35
2	2496.74400	-52.15


File: 20-10-MAS-019_BT1
Site: RF-Cond01

#3

Date: 2020/10/8

Temperature: 24 °C

Humidity: 53 %

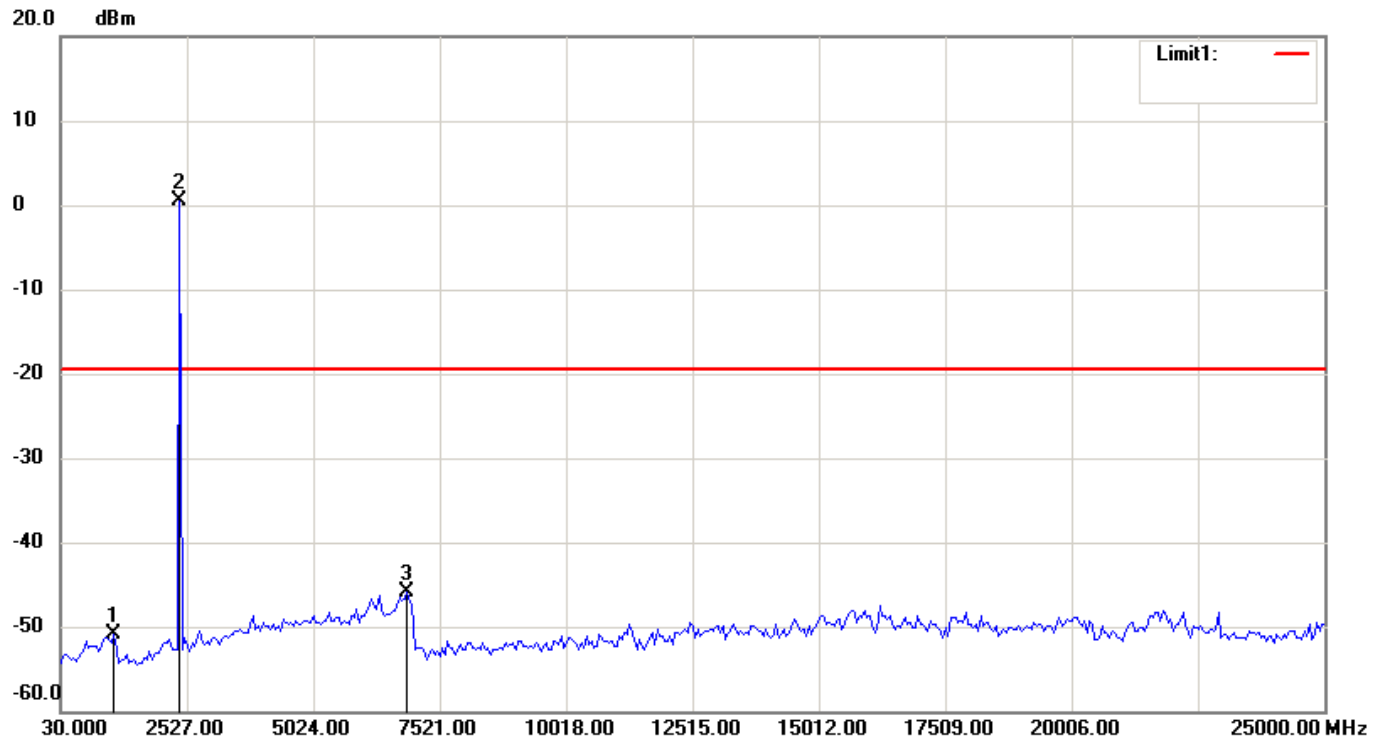

Condition: -19.46dBm
EUT: Development Kit for PlayStation5
Model: DFI-D1000AA
Test Mode: BT
Note: NCC_LP0002_BT CH00-Conducted Spurious

RF Conducted
Sweep Time: 250ms Att.: 25dB
RBW: 100 KHz VBW: 300 KHz
Operator: Phillip

No.	Frequency(MHz)	Level(dBm)
1	1078.74000	-50.86
2	2377.18000	0.54
3	6871.78000	-45.96


File: 20-10-MAS-019_BT1
Site: RF-Cond01

#11

Date: 2020/10/8

Temperature: 24 °C

Humidity: 53 %

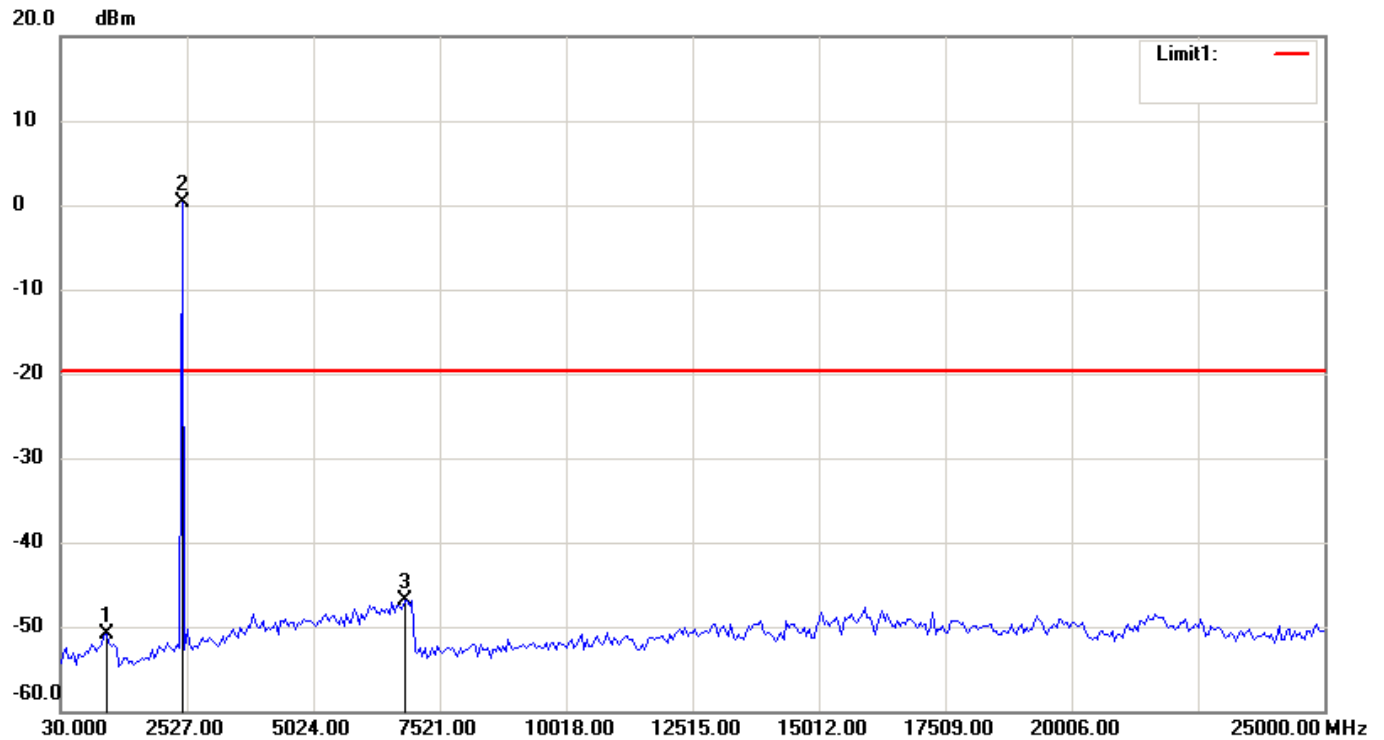

Condition: -19.77dBm
EUT: Development Kit for PlayStation5
Model: DFI-D1000AA
Test Mode: BT
Note: NCC_LP0002_BT CH39-Conducted Spurious

RF Conducted
Sweep Time: 250ms Att.: 25dB
RBW: 100 KHz VBW: 300 KHz
Operator: Phillip

No.	Frequency(MHz)	Level(dBm)
1	928.9200	-50.95
2	2427.12000	0.23
3	6821.84000	-46.88


File: 20-10-MAS-019_BT1
Site: RF-Cond01

#7

Date: 2020/10/8

Temperature: 24 °C

Humidity: 53 %

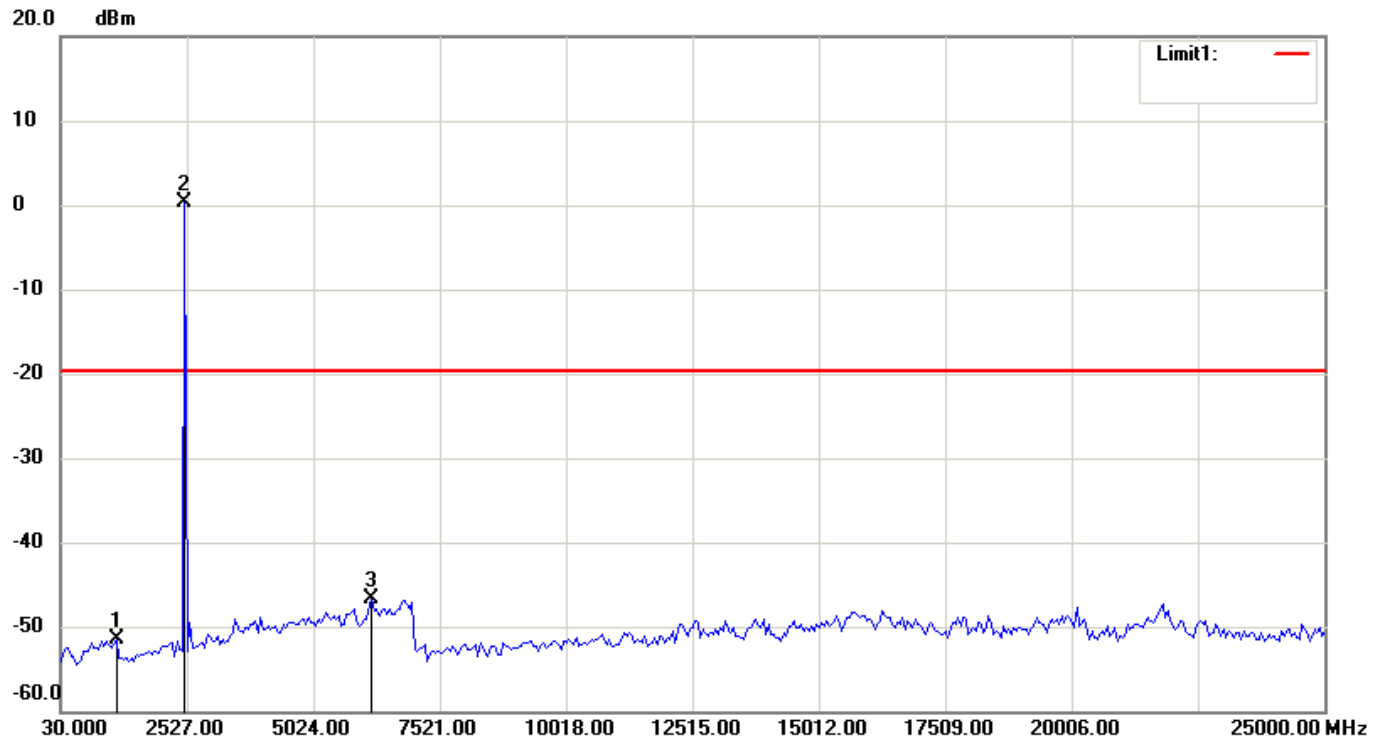

Condition: -19.77dBm
EUT: Development Kit for PlayStation5
Model: DFI-D1000AA
Test Mode: BT
Note: NCC_LP0002_BT CH78-Conducted Spurious

RF Conducted
Sweep Time: 250ms Att.: 25dB
RBW: 100 KHz VBW: 300 KHz
Operator: Phillip

No.	Frequency(MHz)	Level(dBm)
1	1128.68000	-51.47
2	2477.06000	0.23
3	6172.62000	-46.62

7.4.1.2 測試狀態: EDR

- a. 下邊緣頻帶：距下頻帶邊緣40MHz內最大混附波產生於 2399.920 MHz，比主波低 20dB以上，合乎標準規定。
- b. 上邊緣頻帶：距上頻帶邊緣40MHz內最大混附波產生於 2485.788 MHz，比主波低 20dB以上，合乎標準規定。

註：1. 繪圖資料請參考第49-55頁。


File: 20-10-MAS-019_BT1
Site: RF-Cond01

#27

Date: 2020/10/8

Temperature: 24 °C

Humidity: 53 %

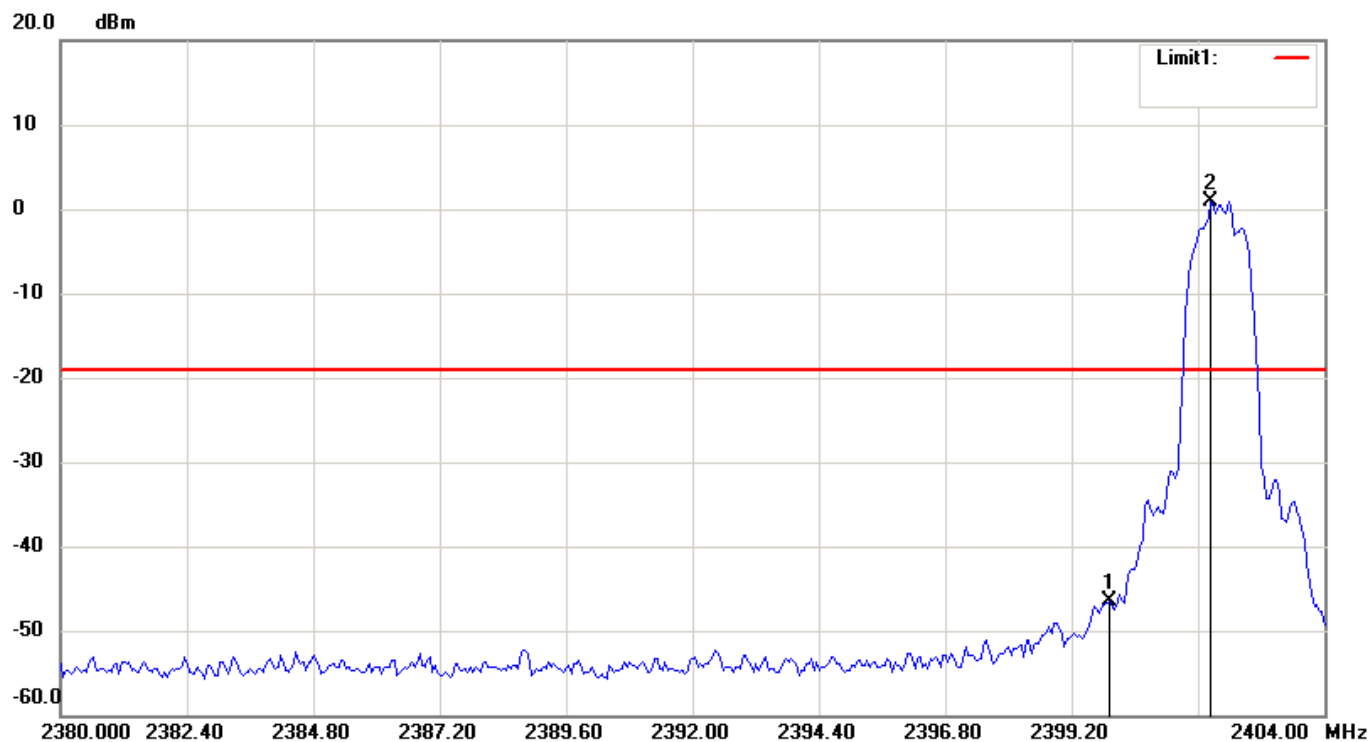

Condition: -19.06dBm
EUT: Development Kit for PlayStation5
Model: DFI-D1000AA
Test Mode: BT
Note: NCC_LP0002_BT CH00-Bandedge (Fixed)

RF Conducted
Sweep Time: 1.01ms Att.: 25dB
RBW: 100 KHz VBW: 300 KHz
Operator: Phillip

No.	Frequency(MHz)	Level(dBm)
1	2399.92000	-46.48
2	2401.84000	0.94


File: 20-10-MAS-019_BT1
Site: RF-Cond01

#35

Date: 2020/10/8

Temperature: 24 °C

Humidity: 53 %

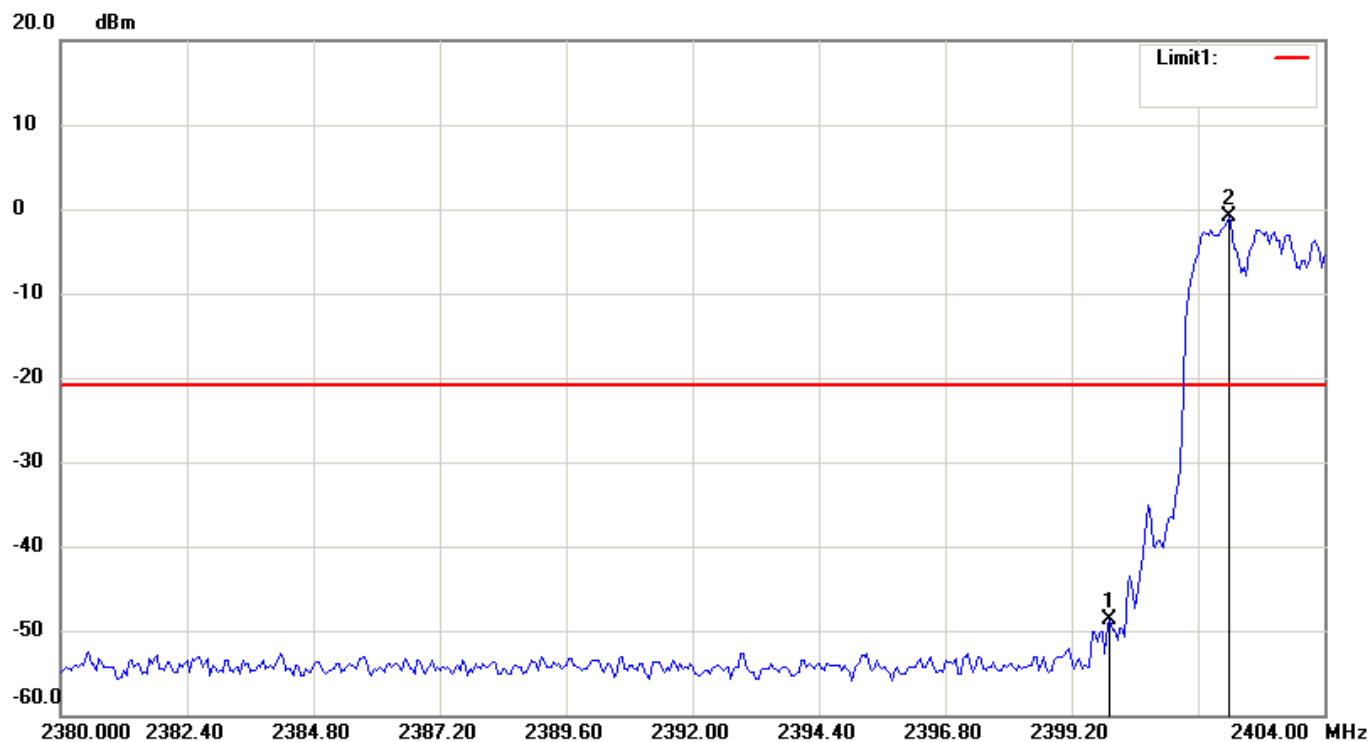

Condition: -20.96dBm
EUT: Development Kit for PlayStation5
Model: DFI-D1000AA
Test Mode: BT
Note: NCC_LP0002_BT CH00-Bandedge (Hopping)

RF Conducted
Sweep Time: 1.01ms Att.: 25dB
RBW: 100 KHz VBW: 300 KHz
Operator: Phillip

No.	Frequency(MHz)	Level(dBm)
1	2399.92000	-48.62
2	2402.17600	-0.96


File: 20-10-MAS-019_BT1
Site: RF-Cond01

#31

Date: 2020/10/8

Temperature: 24 °C

Humidity: 53 %

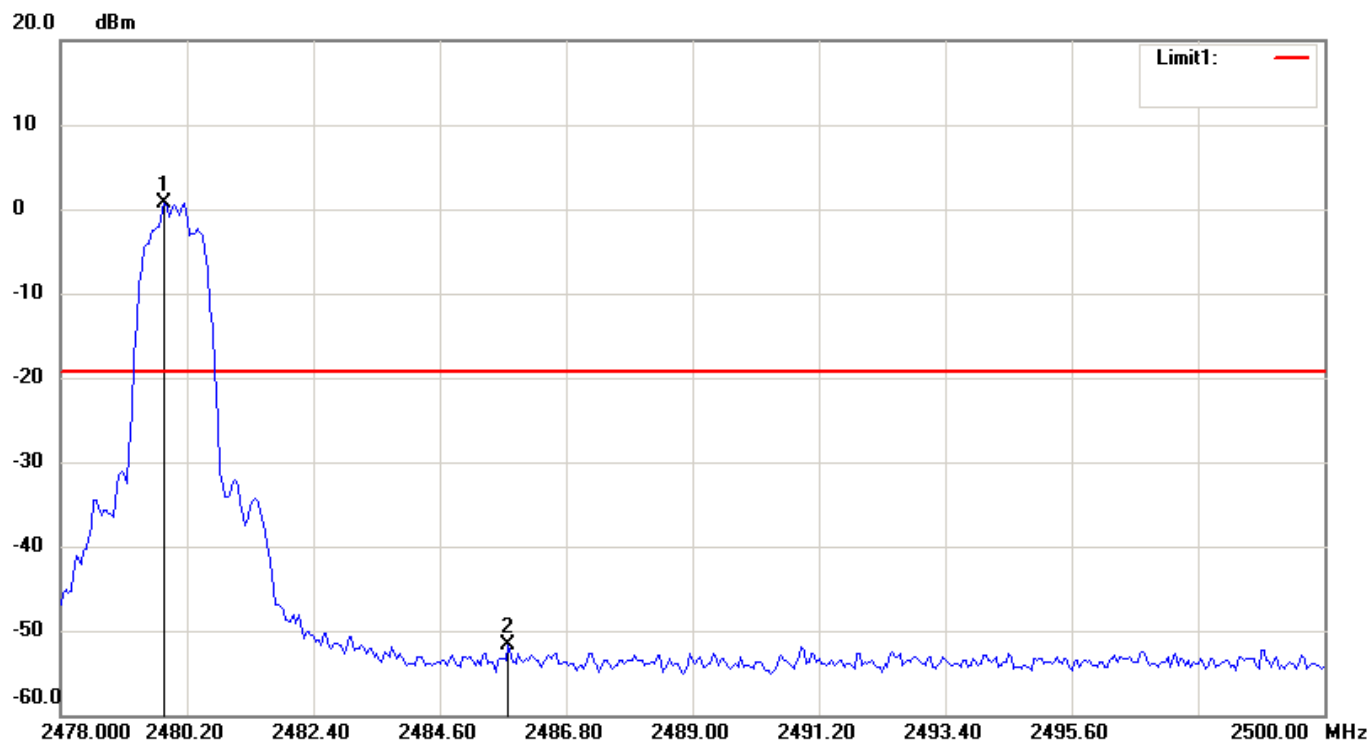

Condition: -19.22dBm
EUT: Development Kit for PlayStation5
Model: DFI-D1000AA
Test Mode: BT
Note: NCC_LP0002_BT CH78-Bandedge (Fixed)

RF Conducted
Sweep Time: 1.02ms Att.: 25dB
RBW: 100 KHz VBW: 300 KHz
Operator: Phillip

No.	Frequency(MHz)	Level(dBm)
1	2479.80400	0.78
2	2485.78800	-51.60


File: 20-10-MAS-019_BT1
Site: RF-Cond01

#36

Date: 2020/10/8

Temperature: 24 °C

Humidity: 53 %

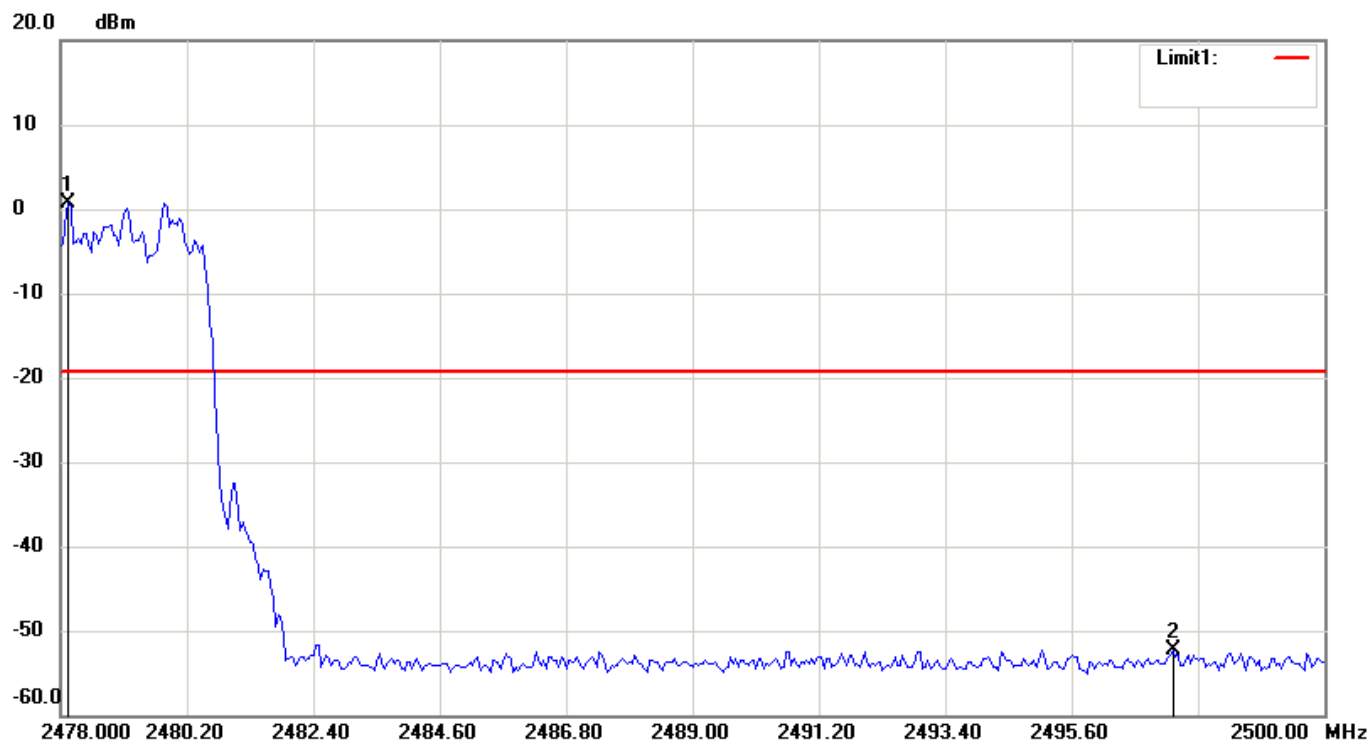

Condition: -19.26dBm
EUT: Development Kit for PlayStation5
Model: DFI-D1000AA
Test Mode: BT
Note: NCC_LP0002_BT CH78-Bandedge (Hopping)

RF Conducted
Sweep Time: 1.02ms Att.: 25dB
RBW: 100 KHz VBW: 300 KHz
Operator: Phillip

No.	Frequency(MHz)	Level(dBm)
1	2478.13200	0.74
2	2497.36000	-52.37


File: 20-10-MAS-019_BT1
Site: RF-Cond01

#26

Date: 2020/10/8

Temperature: 24 °C

Humidity: 53 %

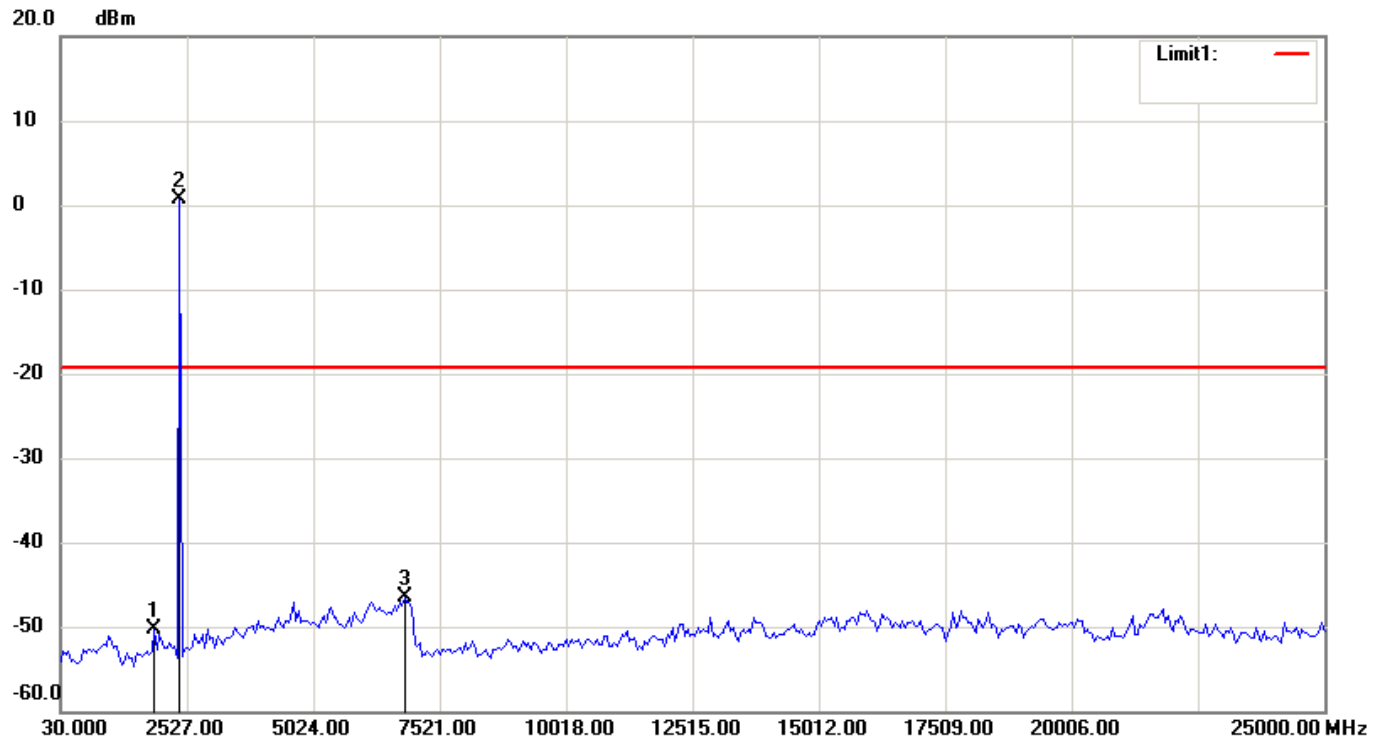

Condition: -19.33dBm
EUT: Development Kit for PlayStation5
Model: DFI-D1000AA
Test Mode: BT
Note: NCC_LP0002_BT CH00-Conducted Spurious

RF Conducted
Sweep Time: 250ms Att.: 25dB
RBW: 100 KHz VBW: 300 KHz
Operator: Phillip

No.	Frequency(MHz)	Level(dBm)
1	1877.78000	-50.22
2	2377.18000	0.67
3	6821.84000	-46.44


File: 20-10-MAS-019_BT1
Site: RF-Cond01

#34

Date: 2020/10/8

Temperature: 24 °C

Humidity: 53 %

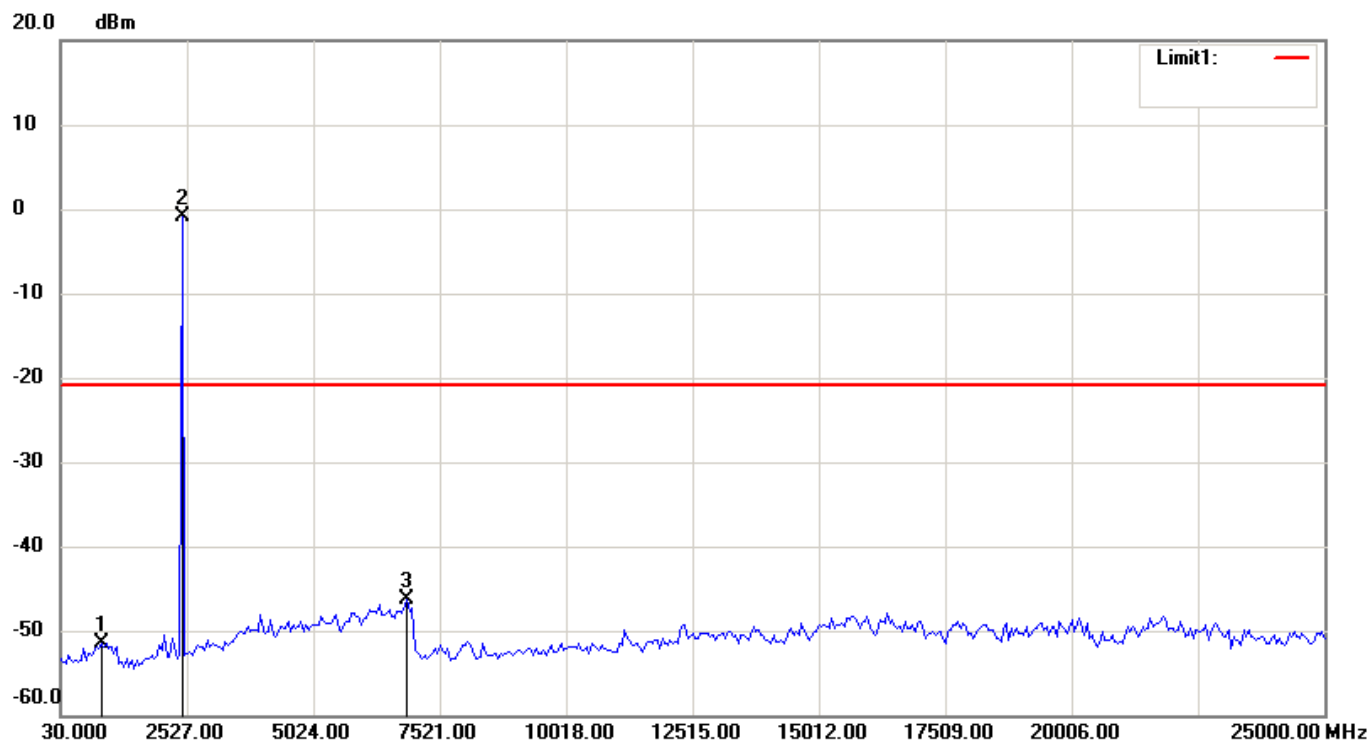

Condition: -20.81dBm
EUT: Development Kit for PlayStation5
Model: DFI-D1000AA
Test Mode: BT
Note: NCC_LP0002_BT CH39-Conducted Spurious

RF Conducted
Sweep Time: 250ms Att.: 25dB
RBW: 100 KHz VBW: 300 KHz
Operator: Phillip

No.	Frequency(MHz)	Level(dBm)
1	829.0400	-51.49
2	2427.12000	-0.81
3	6871.78000	-46.28


File: 20-10-MAS-019_BT1
Site: RF-Cond01

#30

Date: 2020/10/8

Temperature: 24 °C

Humidity: 53 %

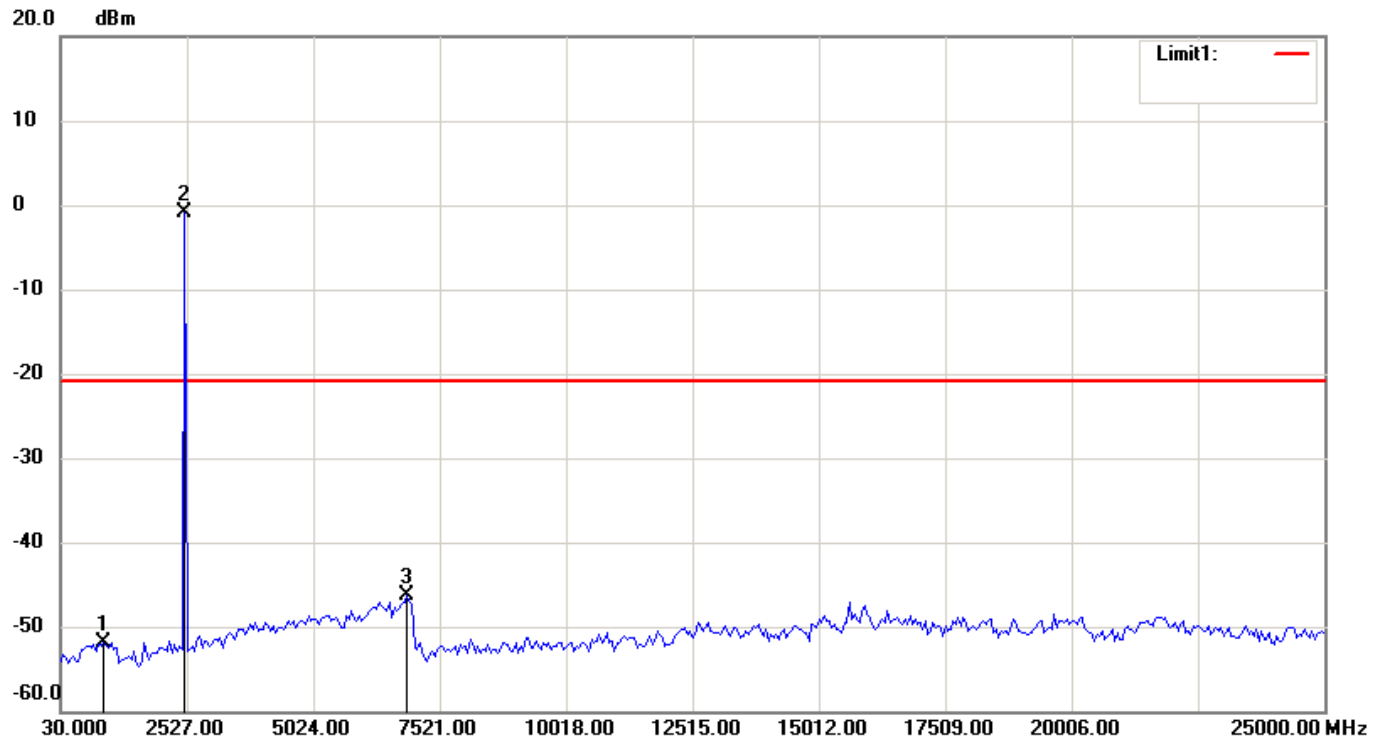

Condition: -20.9dBm
EUT: Development Kit for PlayStation5
Model: DFI-D1000AA
Test Mode: BT
Note: NCC_LP0002_BT CH78-Conducted Spurious

RF Conducted
Sweep Time: 250ms Att.: 25dB
RBW: 100 KHz VBW: 300 KHz
Operator: Phillip

No.	Frequency(MHz)	Level(dBm)
1	878.9800	-51.83
2	2477.06000	-0.90
3	6871.78000	-46.29

7.4.2 BT_Module2

7.4.2.1 測試狀態: NON-EDR

- a. 下邊緣頻帶：距下頻帶邊緣40MHz內最大混附波產生於 2393.968 MHz，比主波低 20dB以上，合乎標準規定。
- b. 上邊緣頻帶：距上頻帶邊緣40MHz內最大混附波產生於 2489.924 MHz，比主波低 20dB以上，合乎標準規定。

註：1. 繪圖資料請參考第57-63頁。

2. 量測不準確度: +1.44dB / -1.45dB。


File: 20-10-MAS-019_BT2
Site: RF-Cond01

#4

Date: 2020/10/8

Temperature: 24 °C

Humidity: 53 %

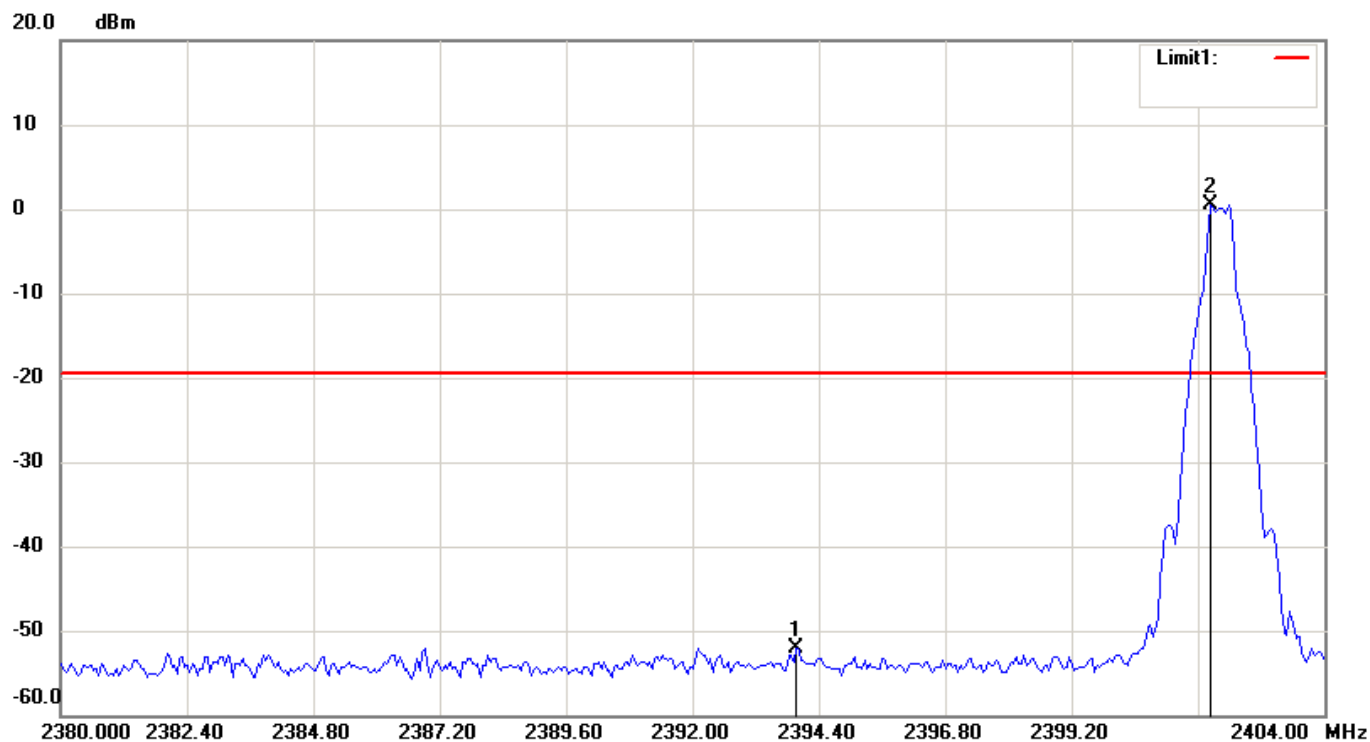

Condition: -19.52dBm
EUT: Development Kit for PlayStation5
Model: DFI-D1000AA
Test Mode: BT
Note: NCC_LP0002_BT CH00-Bandedge (Fixed)

RF Conducted
Sweep Time: 1.01ms Att.: 25dB
RBW: 100 KHz VBW: 300 KHz
Operator: Phillip

No.	Frequency(MHz)	Level(dBm)
1	2393.96800	-52.10
2	2401.84000	0.48


File: 20-10-MAS-019_BT2
Site: RF-Cond01

#12

Date: 2020/10/8

Temperature: 24 °C

Humidity: 53 %

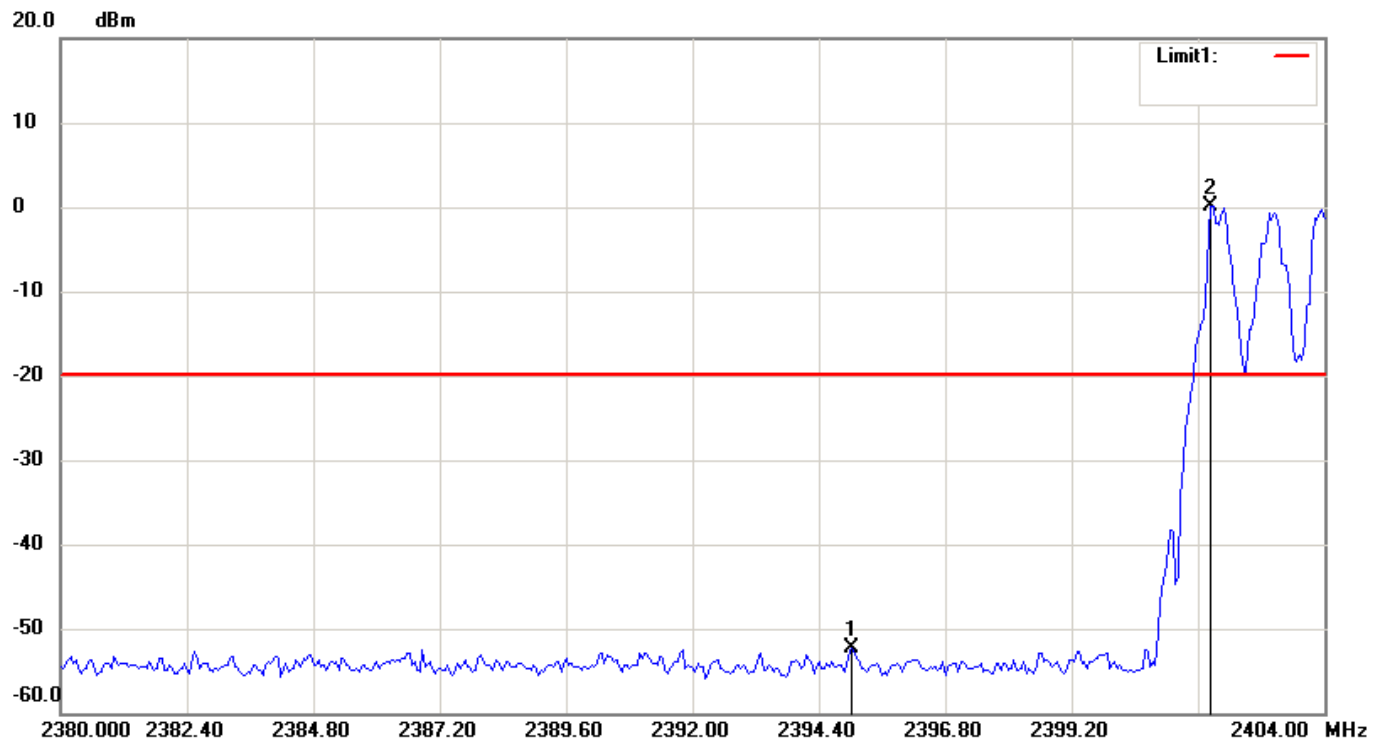

Condition: -19.85dBm
EUT: Development Kit for PlayStation5
Model: DFI-D1000AA
Test Mode: BT
Note: NCC_LP0002_BT CH00-Bandedge (Hopping)

RF Conducted
Sweep Time: 1.01ms Att.: 25dB
RBW: 100 KHz VBW: 300 KHz
Operator: Phillip

No.	Frequency(MHz)	Level(dBm)
1	2395.02400	-52.29
2	2401.84000	0.15


File: 20-10-MAS-019_BT2
Site: RF-Cond01

#8

Date: 2020/10/8

Temperature: 24 °C

Humidity: 53 %

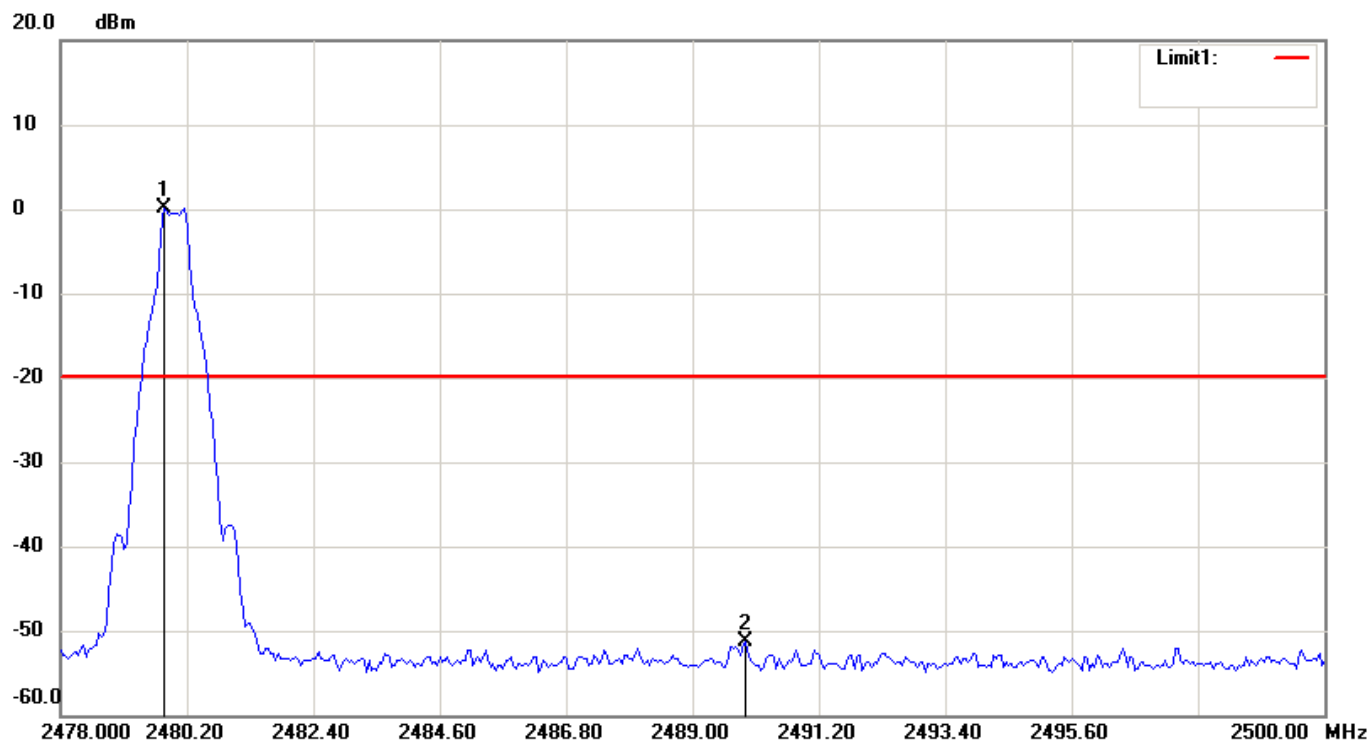

Condition: -19.91dBm
EUT: Development Kit for PlayStation5
Model: DFI-D1000AA
Test Mode: BT
Note: NCC_LP0002_BT CH78-Bandedge (Fixed)

RF Conducted
Sweep Time: 1.02ms Att.: 25dB
RBW: 100 KHz VBW: 300 KHz
Operator: Phillip

No.	Frequency(MHz)	Level(dBm)
1	2479.80400	0.09
2	2489.92400	-51.33


File: 20-10-MAS-019_BT2
Site: RF-Cond01

#13

Date: 2020/10/8

Temperature: 24 °C

Humidity: 53 %

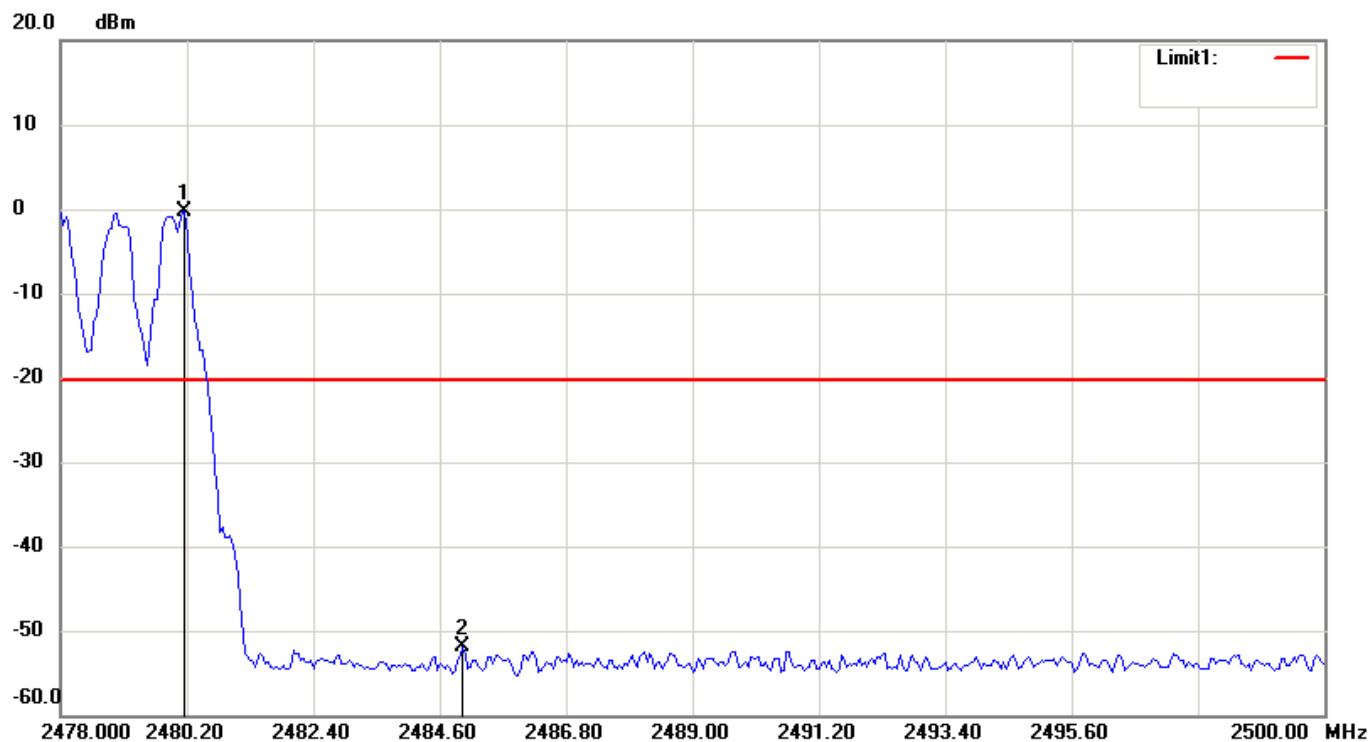

Condition: -20.24dBm
EUT: Development Kit for PlayStation5
Model: DFI-D1000AA
Test Mode: BT
Note: NCC_LP0002_BT CH78-Bandedge (Hopping)

RF Conducted
Sweep Time: 1.02ms Att.: 25dB
RBW: 100 KHz VBW: 300 KHz
Operator: Phillip

No.	Frequency(MHz)	Level(dBm)
1	2480.15600	-0.24
2	2484.99600	-51.97


File: 20-10-MAS-019_BT2
Site: RF-Cond01

#3

Date: 2020/10/8

Temperature: 24 °C

Humidity: 53 %

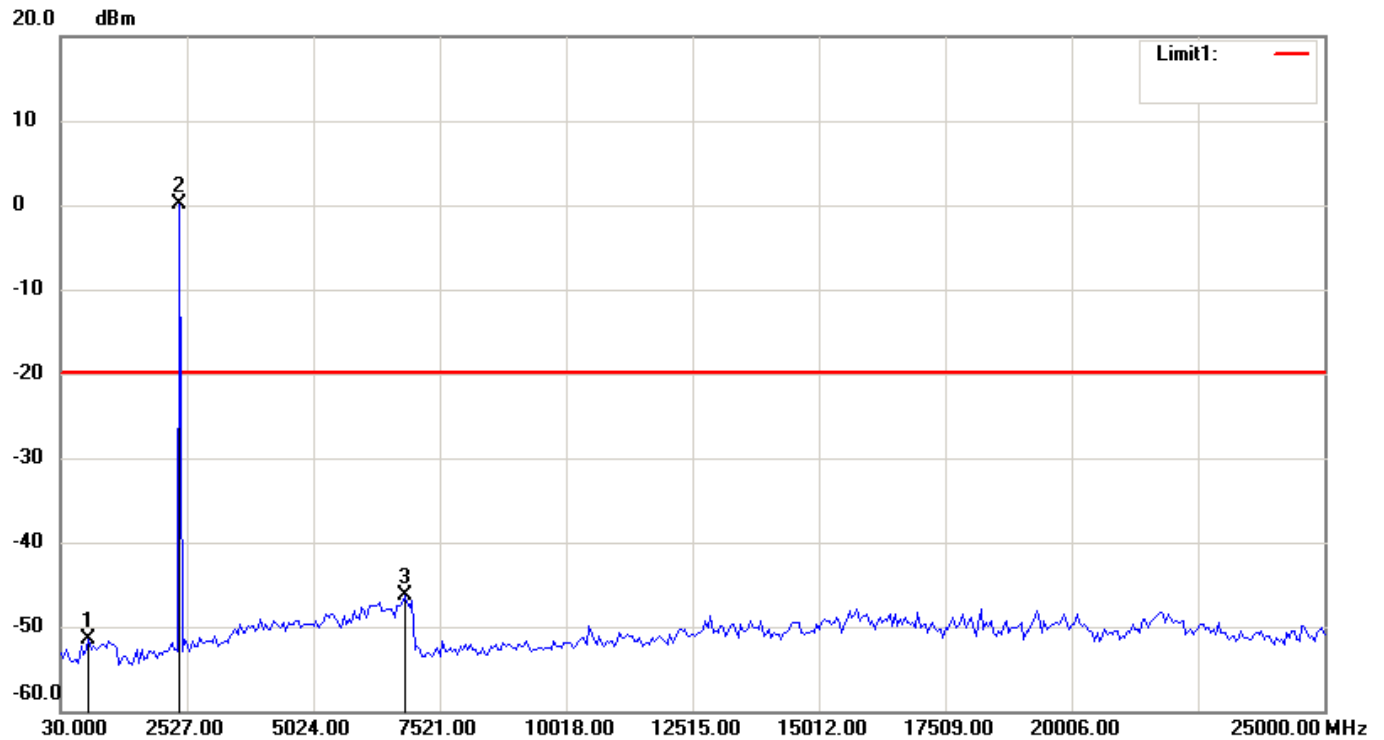

Condition: -19.95dBm
EUT: Development Kit for PlayStation5
Model: DFI-D1000AA
Test Mode: BT
Note: NCC_LP0002_BT CH00-Conducted Spurious

RF Conducted
Sweep Time: 250ms Att.: 25dB
RBW: 100 KHz VBW: 300 KHz
Operator: Phillip

No.	Frequency(MHz)	Level(dBm)
1	579.3400	-51.50
2	2377.18000	0.05
3	6821.84000	-46.38


File: 20-10-MAS-019_BT2
Site: RF-Cond01

#11

Date: 2020/10/8

Temperature: 24 °C

Humidity: 53 %

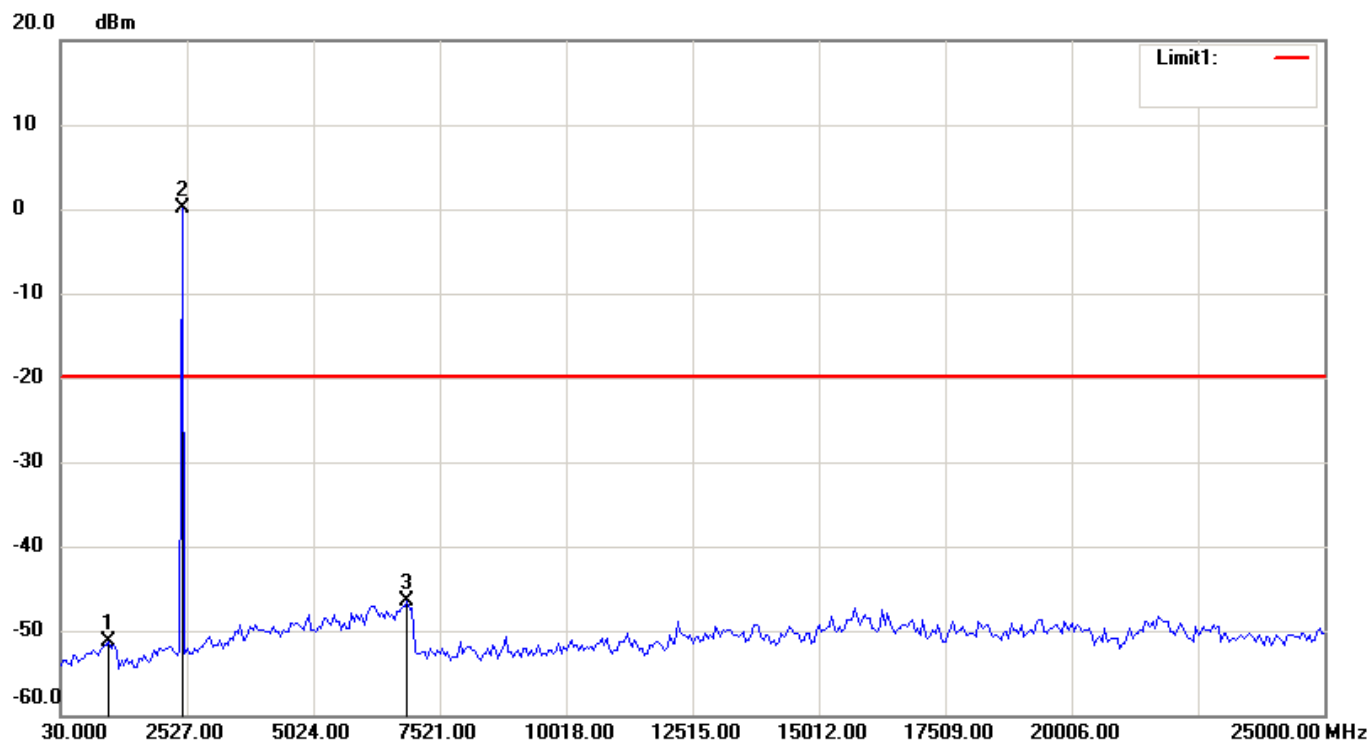

Condition: -19.83dBm
EUT: Development Kit for PlayStation5
Model: DFI-D1000AA
Test Mode: BT
Note: NCC_LP0002_BT CH39-Conducted Spurious

RF Conducted
Sweep Time: 250ms Att.: 25dB
RBW: 100 KHz VBW: 300 KHz
Operator: Phillip

No.	Frequency(MHz)	Level(dBm)
1	978.8600	-51.34
2	2427.12000	0.17
3	6871.78000	-46.53


File: 20-10-MAS-019_BT2
Site: RF-Cond01

#7

Date: 2020/10/8

Temperature: 24 °C

Humidity: 53 %

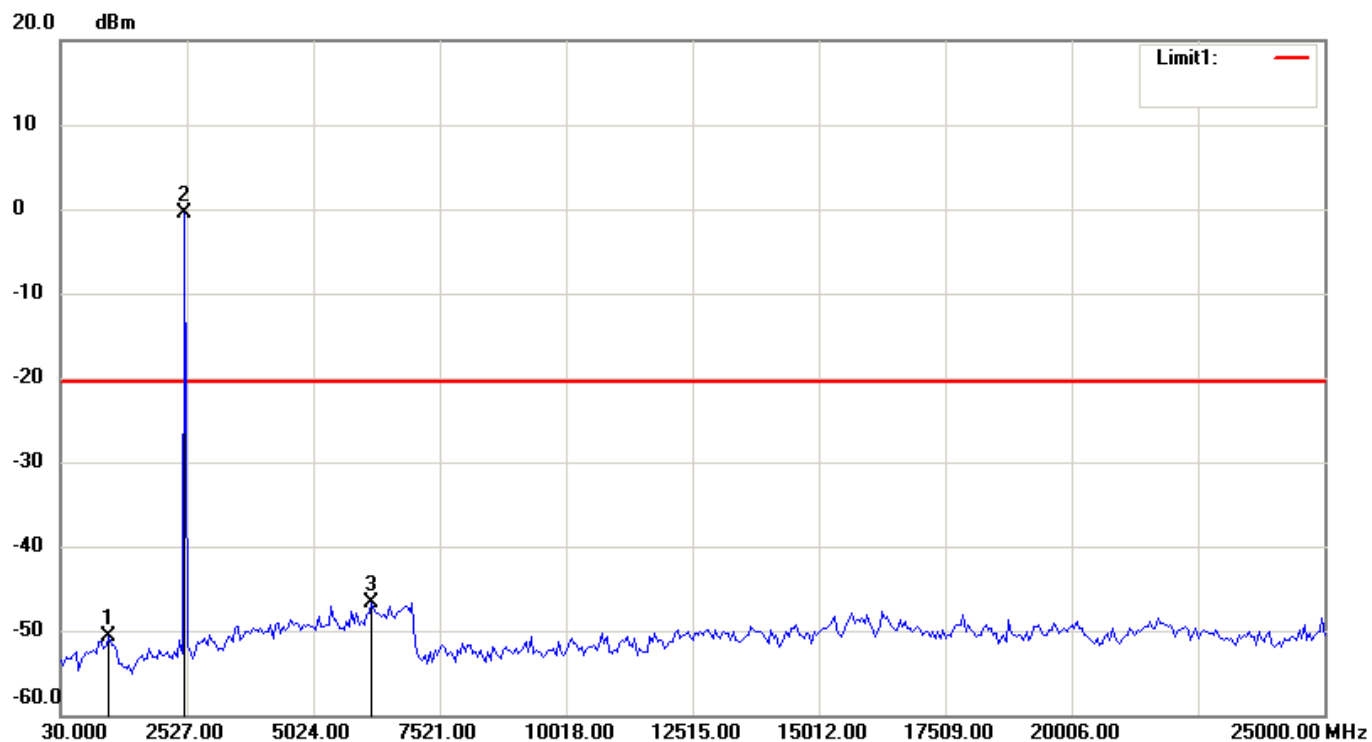

Condition: -20.41dBm
EUT: Development Kit for PlayStation5
Model: DFI-D1000AA
Test Mode: BT
Note: NCC_LP0002_BT CH78-Conducted Spurious

RF Conducted
Sweep Time: 250ms Att.: 25dB
RBW: 100 KHz VBW: 300 KHz
Operator: Phillip

No.	Frequency(MHz)	Level(dBm)
1	978.8600	-50.73
2	2477.06000	-0.41
3	6172.62000	-46.77

7.4.2.2 測試狀態: EDR

- a. 下邊緣頻帶：距下頻帶邊緣40MHz內最大混附波產生於 2399.776 MHz，比主波低 20dB以上，合乎標準規定。
- b. 上邊緣頻帶：距上頻帶邊緣40MHz內最大混附波產生於 2484.600 MHz，比主波低 20dB以上，合乎標準規定。

註：1. 繪圖資料請參考第65-71頁。

7.5 結果判定

使用頻帶外之干擾功率皆低於限制值要求，符合標準規定。


File: 20-10-MAS-019_BT2
Site: RF-Cond01

#27

Date: 2020/10/8

Temperature: 24 °C

Humidity: 53 %

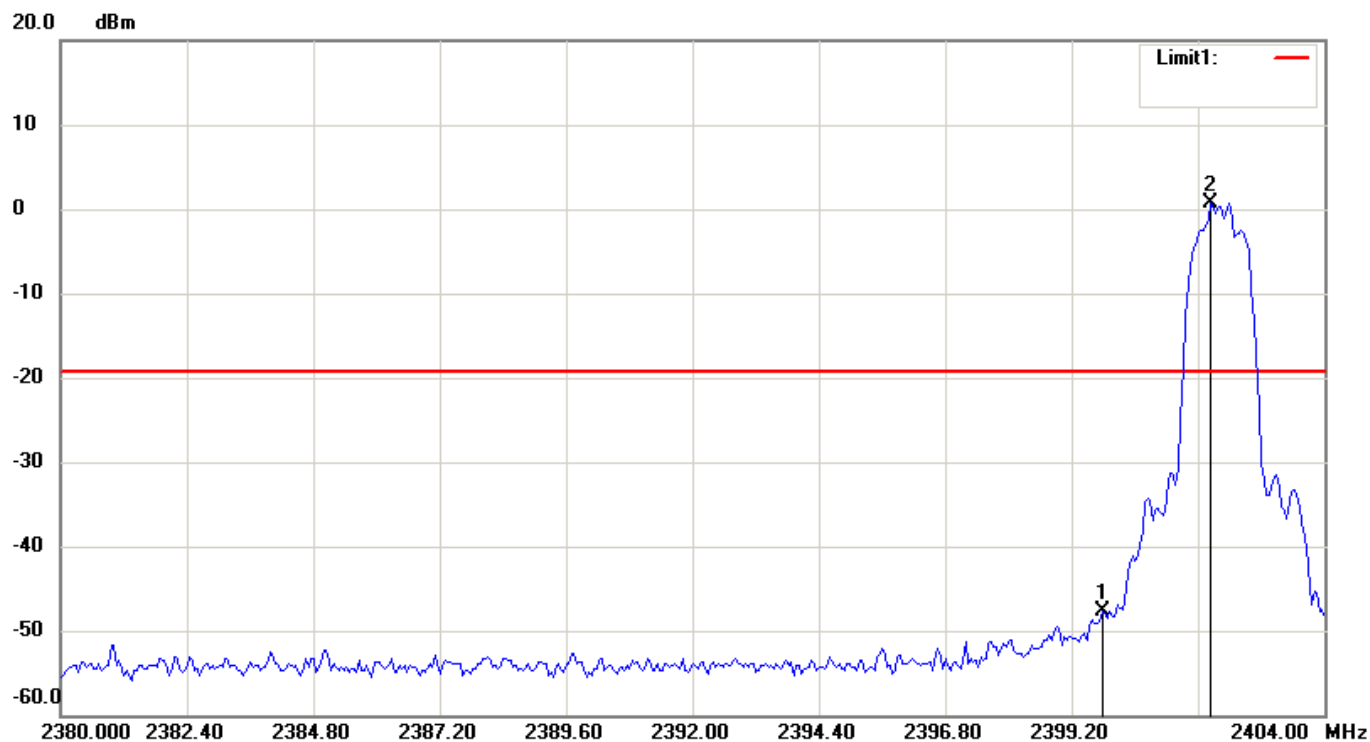

Condition: -19.32dBm
EUT: Development Kit for PlayStation5
Model: DFI-D1000AA
Test Mode: BT
Note: NCC_LP0002_BT CH00-Bandedge (Fixed)

RF Conducted
Sweep Time: 1.01ms Att.: 25dB
RBW: 100 KHz VBW: 300 KHz
Operator: Phillip

No.	Frequency(MHz)	Level(dBm)
1	2399.77600	-47.67
2	2401.84000	0.68


File: 20-10-MAS-019_BT2
Site: RF-Cond01

#35

Date: 2020/10/8

Temperature: 24 °C

Humidity: 53 %

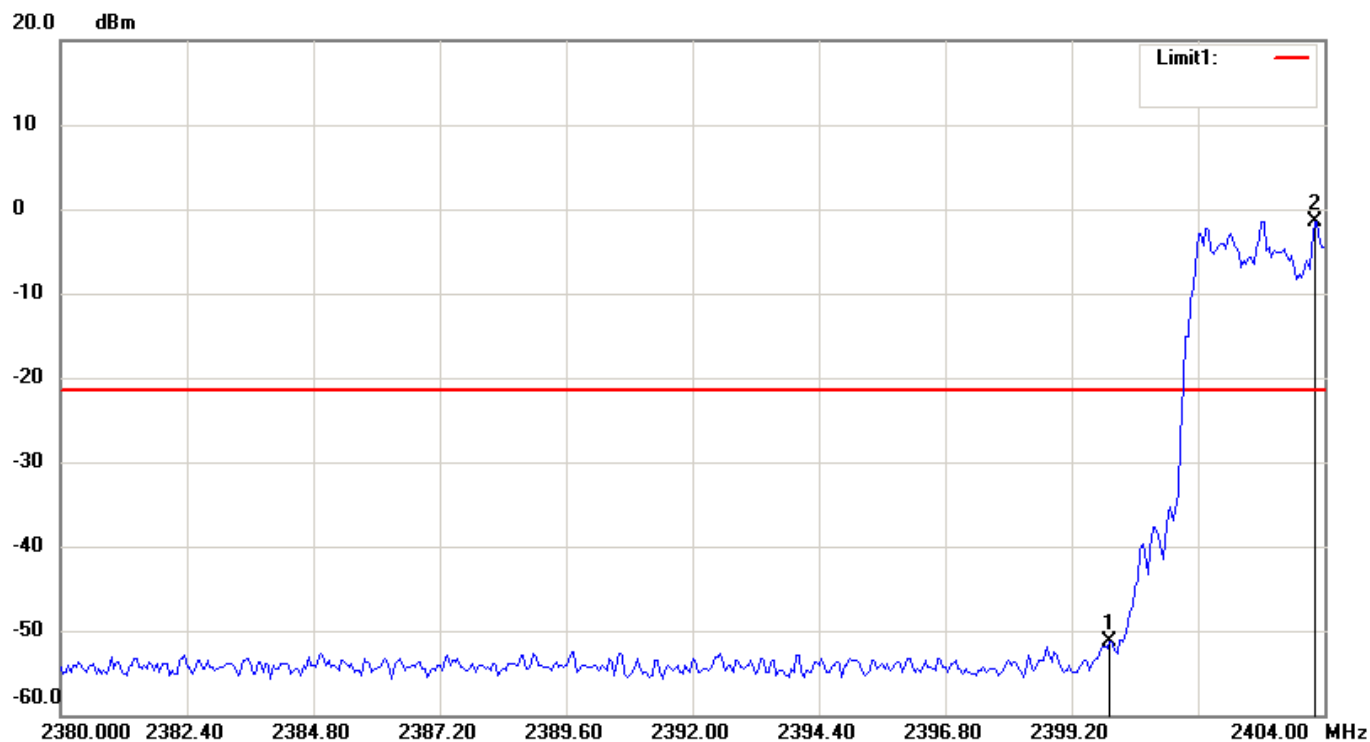

Condition: -21.43dBm
EUT: Development Kit for PlayStation5
Model: DFI-D1000AA
Test Mode: BT
Note: NCC_LP0002_BT CH00-Bandedge (Hopping)

RF Conducted
Sweep Time: 1.01ms Att.: 25dB
RBW: 100 KHz VBW: 300 KHz
Operator: Phillip

No.	Frequency(MHz)	Level(dBm)
1	2399.92000	-51.30
2	2403.80800	-1.43


File: 20-10-MAS-019_BT2
Site: RF-Cond01

#31

Date: 2020/10/8

Temperature: 24 °C

Humidity: 53 %

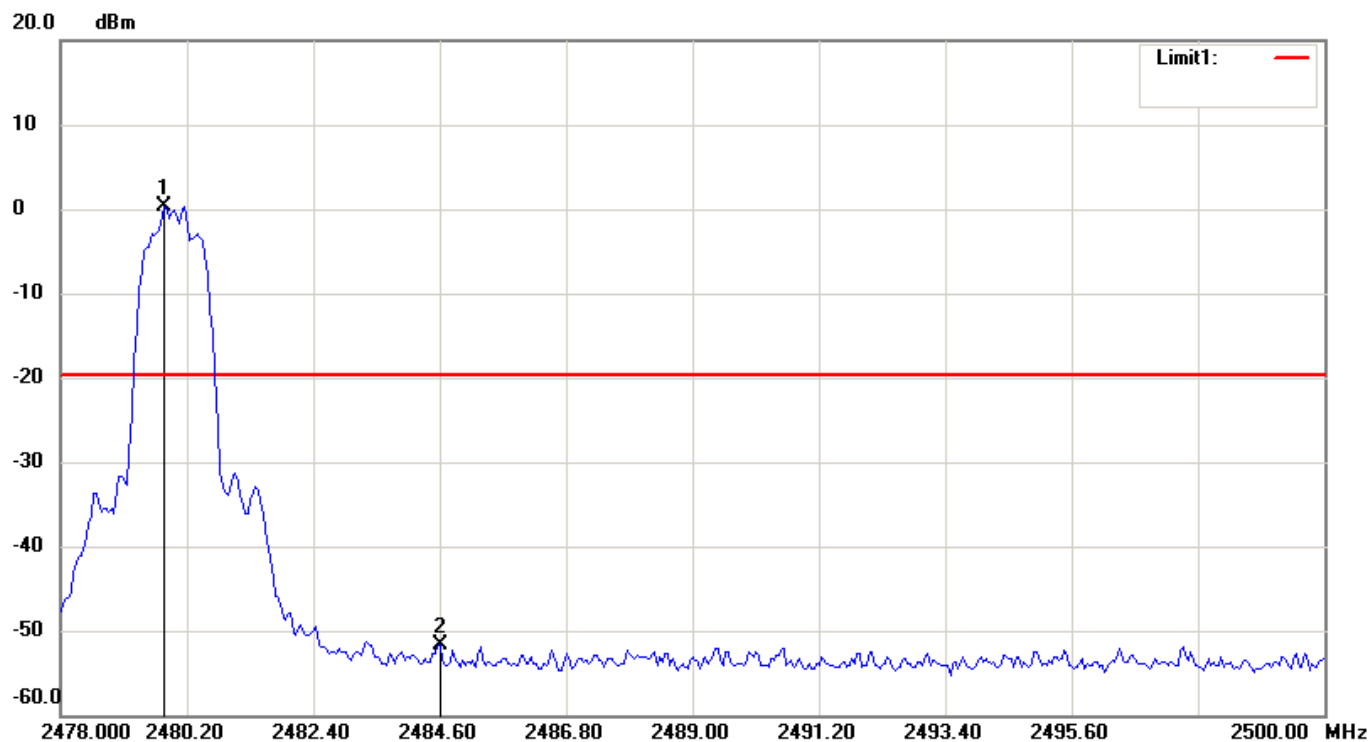

Condition: -19.7dBm
EUT: Development Kit for PlayStation5
Model: DFI-D1000AA
Test Mode: BT
Note: NCC_LP0002_BT CH78-Bandedge (Fixed)

RF Conducted
Sweep Time: 1.02ms Att.: 25dB
RBW: 100 KHz VBW: 300 KHz
Operator: Phillip

No.	Frequency(MHz)	Level(dBm)
1	2479.80400	0.30
2	2484.60000	-51.69


File: 20-10-MAS-019_BT2
Site: RF-Cond01

#36

Date: 2020/10/8

Temperature: 24 °C

Humidity: 53 %

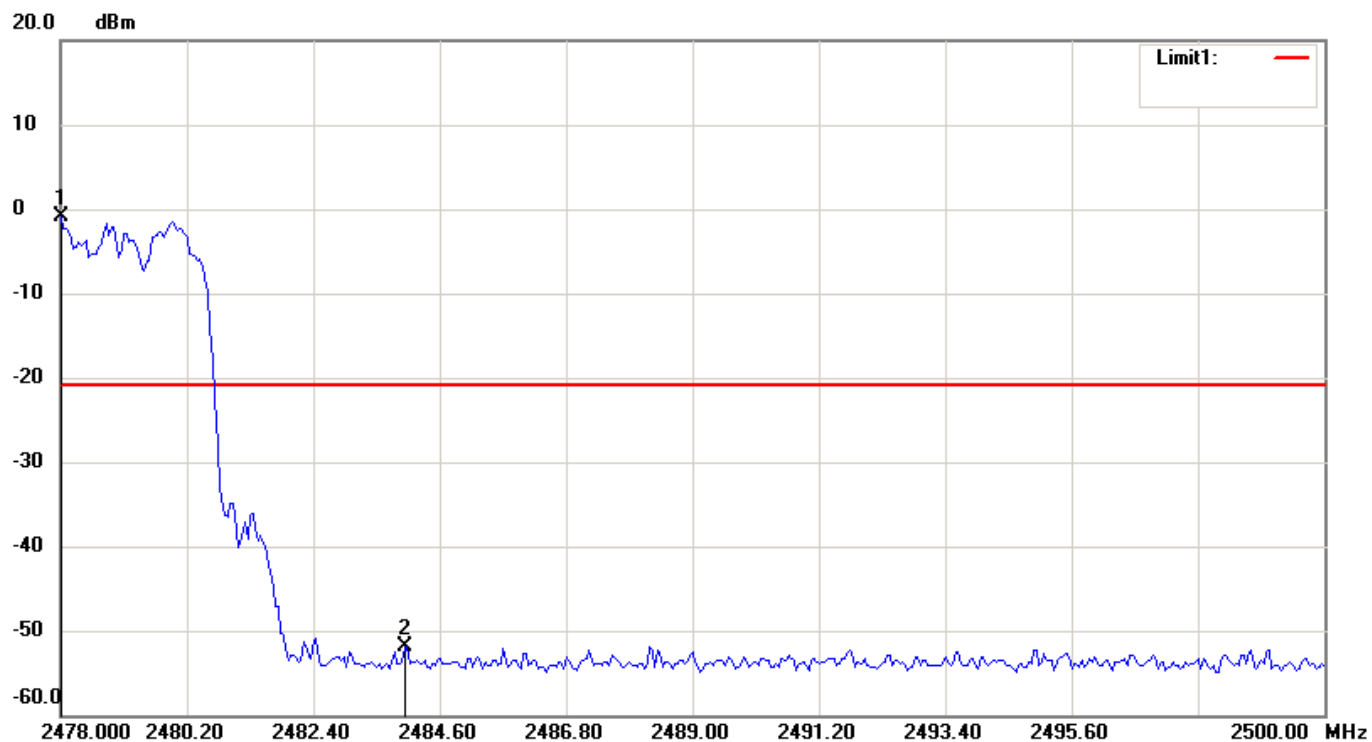

Condition: -20.88dBm
EUT: Development Kit for PlayStation5
Model: DFI-D1000AA
Test Mode: BT
Note: NCC_LP0002_BT CH78-Bandedge (Hopping)

RF Conducted
Sweep Time: 1.02ms Att.: 25dB
RBW: 100 KHz VBW: 300 KHz
Operator: Phillip

No.	Frequency(MHz)	Level(dBm)
1	2478.00000	-0.88
2	2483.98400	-51.87


File: 20-10-MAS-019_BT2
Site: RF-Cond01

#26

Date: 2020/10/8

Temperature: 24 °C

Humidity: 53 %

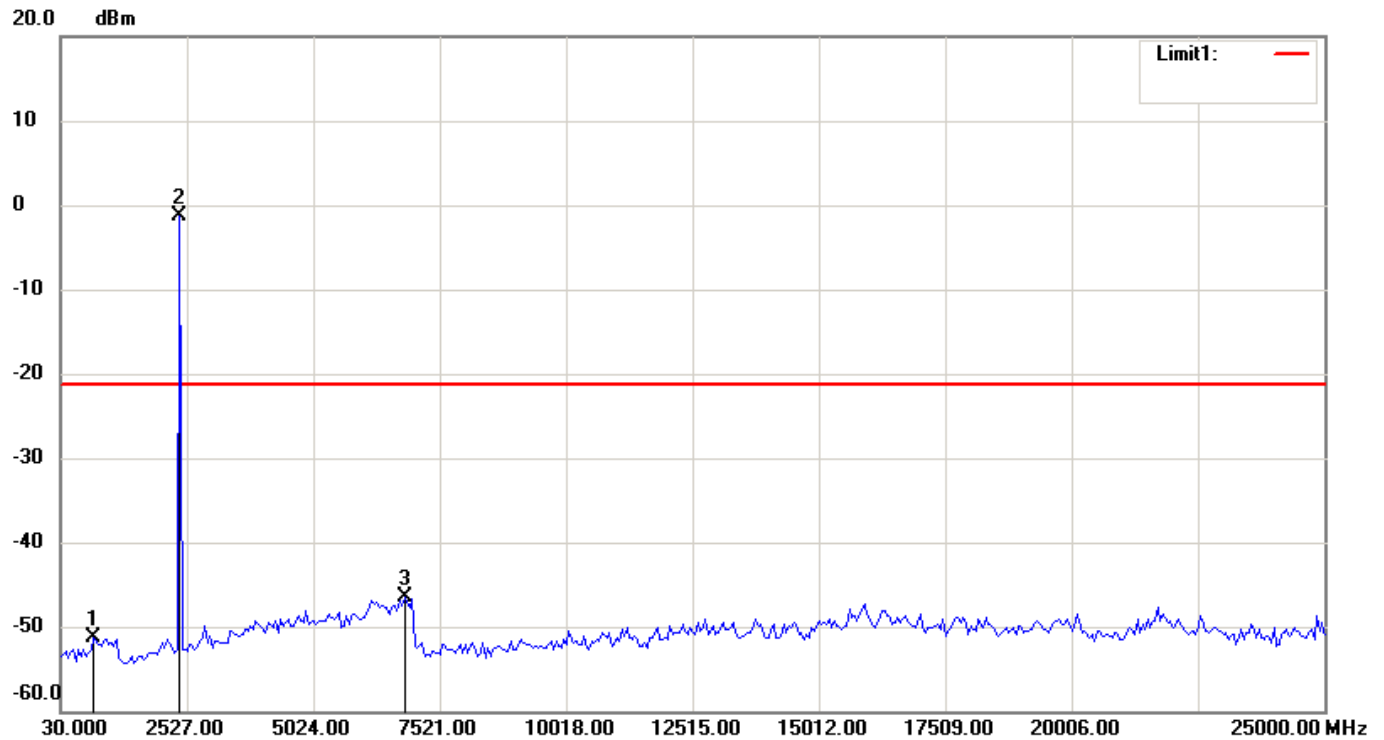

Condition: -21.36dBm
EUT: Development Kit for PlayStation5
Model: DFI-D1000AA
Test Mode: BT
Note: NCC_LP0002_BT CH00-Conducted Spurious

RF Conducted
Sweep Time: 250ms Att.: 25dB
RBW: 100 KHz VBW: 300 KHz
Operator: Phillip

No.	Frequency(MHz)	Level(dBm)
1	679.2200	-51.33
2	2377.18000	-1.36
3	6821.84000	-46.43


File: 20-10-MAS-019_BT2
Site: RF-Cond01

#34

Date: 2020/10/8

Temperature: 24 °C

Humidity: 53 %

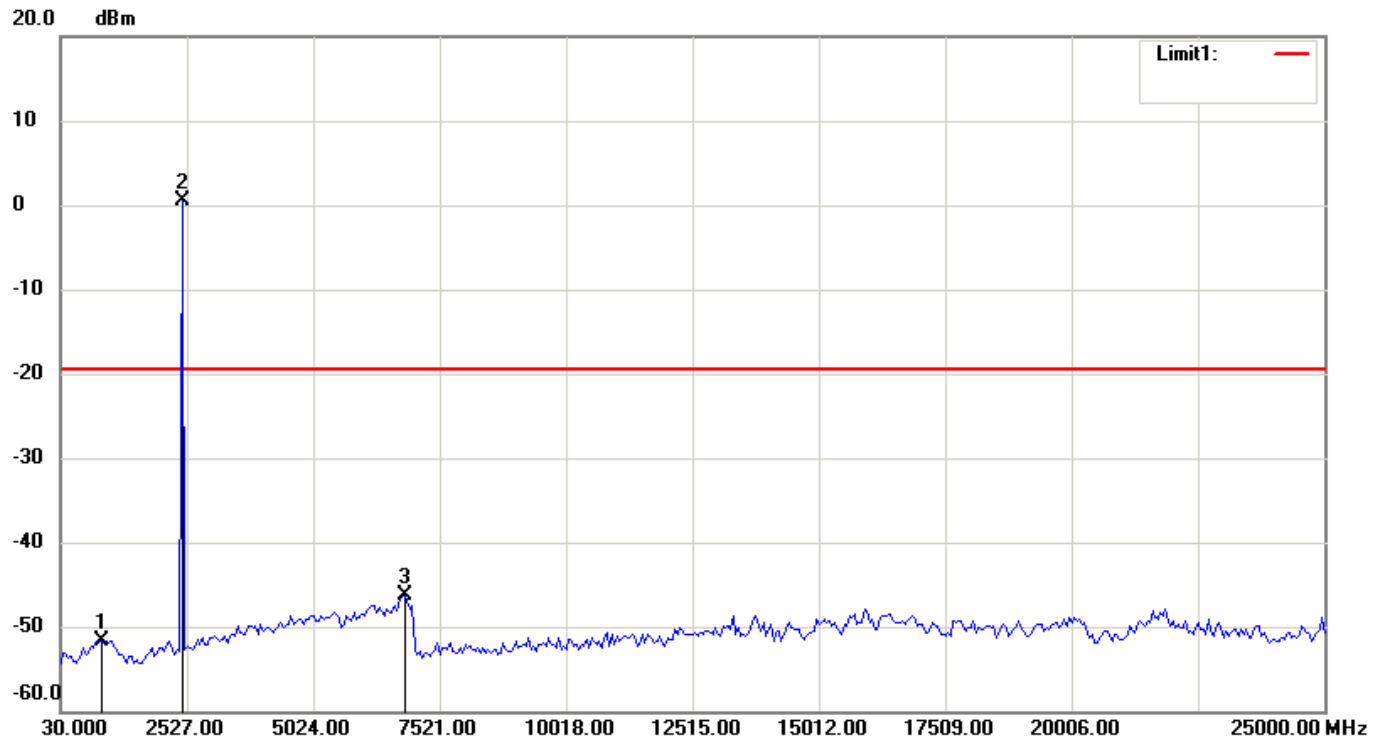

Condition: -19.57dBm
EUT: Development Kit for PlayStation5
Model: DFI-D1000AA
Test Mode: BT
Note: NCC_LP0002_BT CH39-Conducted Spurious

RF Conducted
Sweep Time: 250ms Att.: 25dB
RBW: 100 KHz VBW: 300 KHz
Operator: Phillip

No.	Frequency(MHz)	Level(dBm)
1	829.0400	-51.64
2	2427.12000	0.43
3	6821.84000	-46.36


File: 20-10-MAS-019_BT2
Site: RF-Cond01

#30

Date: 2020/10/8

Temperature: 24 °C

Humidity: 53 %

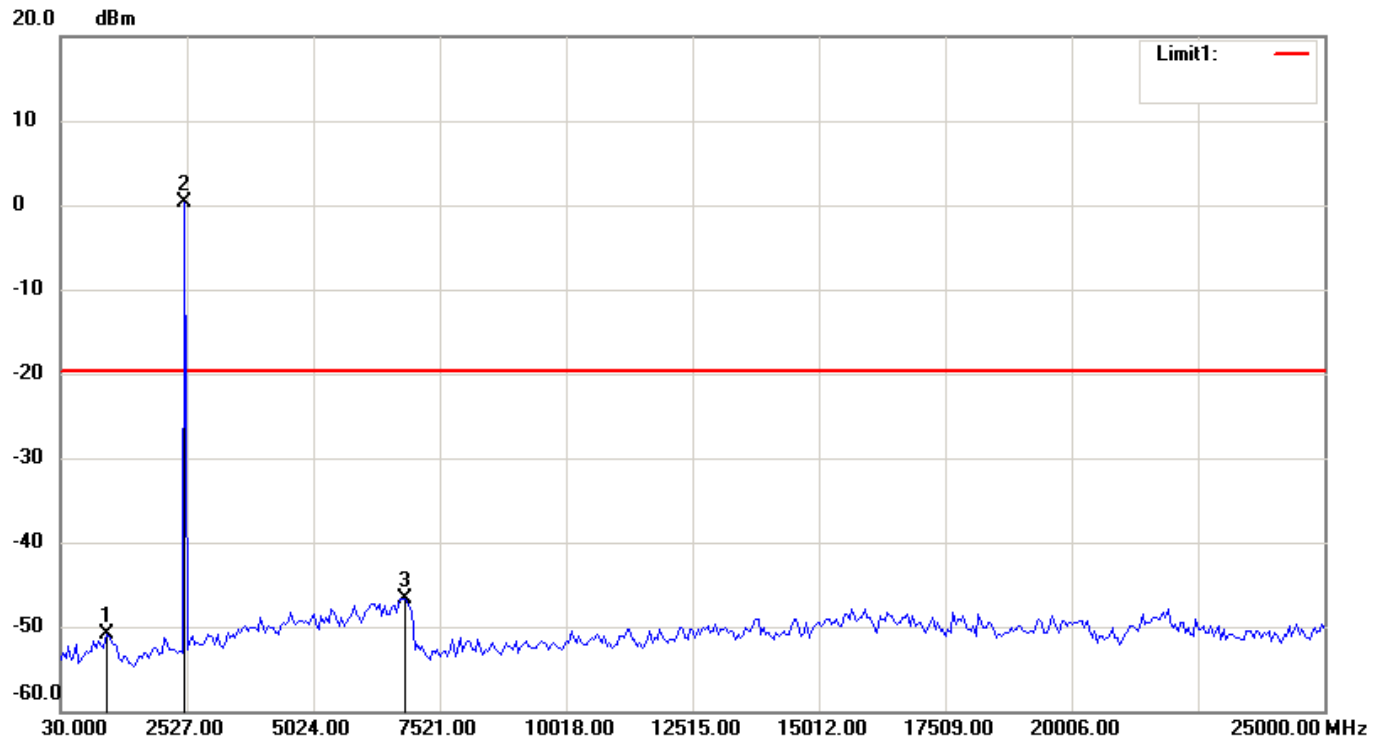

Condition: -19.68dBm
EUT: Development Kit for PlayStation5
Model: DFI-D1000AA
Test Mode: BT
Note: NCC_LP0002_BT CH78-Conducted Spurious

RF Conducted
Sweep Time: 250ms Att.: 25dB
RBW: 100 KHz VBW: 300 KHz
Operator: Phillip

No.	Frequency(MHz)	Level(dBm)
1	928.9200	-50.98
2	2477.06000	0.32
3	6821.84000	-46.61

8 跳頻頻道之要求

8.1 適用標準

依據國家通訊傳播委員會低功率射頻器材技術規範4.10.1.6節之(1)(A)之規定，跳頻系統之載波頻率頻道間隔應大於或等於25 kHz或跳頻頻道之20 dB頻寬，兩者取較寬者。但操作頻率為2400-2483.5兆赫（MHz）頻段且輸出功率小於或等於125 mW跳頻系統，其載波頻率頻道間隔不得小於25 kHz或跳頻頻道20 dB頻寬之三分之二，兩者取較寬者。系統之跳頻頻道應依虛擬亂數排列，在各頻率之跳頻頻道上跳躍。每一發射機必須均等的使用每一頻率。系統接收機應具有與發射機跳躍頻道頻寬相匹配之輸入頻寬，且應隨所發射的信號同步偏移接收頻率。

依據國家通訊傳播委員會低功率射頻器材技術規範4.10.1.6節之(1)(A)(a)之規定，操作於2400-2483.5MHz之展頻跳頻系統，須使用至少15個無重疊的頻道，在0.4秒乘以跳頻頻道數之週期內，任一頻率佔用之平均時間應小於或等於0.4秒。應使用智慧型跳頻技術，以避免占用於特定跳頻頻道。

8.2 量測配置

如圖 2 所示。

8.3 量測儀器

儀器名稱	製造者	型 號
Spectrum Analyzer	R&S	FSV
Attenuator	WEINSCHEL	56-10

測試軟體: LZ-RF (Ver. ETC-3A2)

8.4 量測結果

測試工程師:羅世勇

測試日期: Oct. 08, 2020

環境溫度: 24°C

環境濕度: 53%

8.4.1 BT_Module1 跳頻頻道載波使用數

註: 使用跳頻頻道數為 79 個, 繪圖資料請參考第75-77頁。

8.4.2 BT_Module2 跳頻頻道載波使用數

註: 使用跳頻頻道數為 79 個, 繪圖資料請參考第78-80頁。

8.4.2 跳頻頻道載波間隔

8.4.2.1 BT_Module1

8.4.2.1.1 測試狀態: NON-EDR

跳頻頻道載波間隔為 0.996 MHz, 其

- a) 2402 MHz 之20dB 的發射頻帶寬度為 0.966 MHz。
- b) 2441 MHz 之20dB 的發射頻帶寬度為 0.966 MHz。
- c) 2480 MHz 之20dB 的發射頻帶寬度為 0.966 MHz。

測試結果: 跳頻頻道載波間隔大於25千赫(kHz)或跳頻頻道之20dB頻寬之三分之二倍, 合乎標準規定。

註: 繪圖資料請參考第81-84頁。

8.4.2.1.2 測試狀態: EDR

- a) 2402 MHz 之20dB 的發射頻帶寬度為 1.302 MHz。
- b) 2441 MHz 之20dB 的發射頻帶寬度為 1.302 MHz。
- c) 2480 MHz 之20dB 的發射頻帶寬度為 1.302 MHz。

測試結果: 跳頻頻道載波間隔大於25千赫(kHz)或跳頻頻道之20dB頻寬之三分之二倍, 合乎標準規定。

註: 繪圖資料請參考第85-87頁。

8.4.2.2 BT_Module2

8.4.2.2.1 測試狀態: NON-EDR

跳頻頻道載波間隔為 1.002 MHz，其

- a) 2402 MHz 之20dB 的發射頻帶寬度為 0.966 MHz。
- b) 2441 MHz 之20dB 的發射頻帶寬度為 0.966 MHz。
- c) 2480 MHz 之20dB 的發射頻帶寬度為 0.966 MHz。

測試結果：跳頻頻道載波間隔大於25千赫(kHz)或跳頻頻道之20dB頻寬之三分之二倍，合乎標準規定。

註：繪圖資料請參考第88-91頁。

8.4.2.2.2 測試狀態: EDR

- a) 2402 MHz 之20dB 的發射頻帶寬度為 1.302 MHz。
- b) 2441 MHz 之20dB 的發射頻帶寬度為 1.302 MHz。
- c) 2480 MHz 之20dB 的發射頻帶寬度為 1.308 MHz。

測試結果：跳頻頻道載波間隔大於25千赫(kHz)或跳頻頻道之20dB頻寬之三分之二倍，合乎標準規定。

註：繪圖資料請參考第92-94頁。

BT_Module1

File: 20-10-MAS-019_BT1


#21

Date: 2020/10/8

Temperature: 24 °C

Site: RF-Cond01

Humidity: 53 %

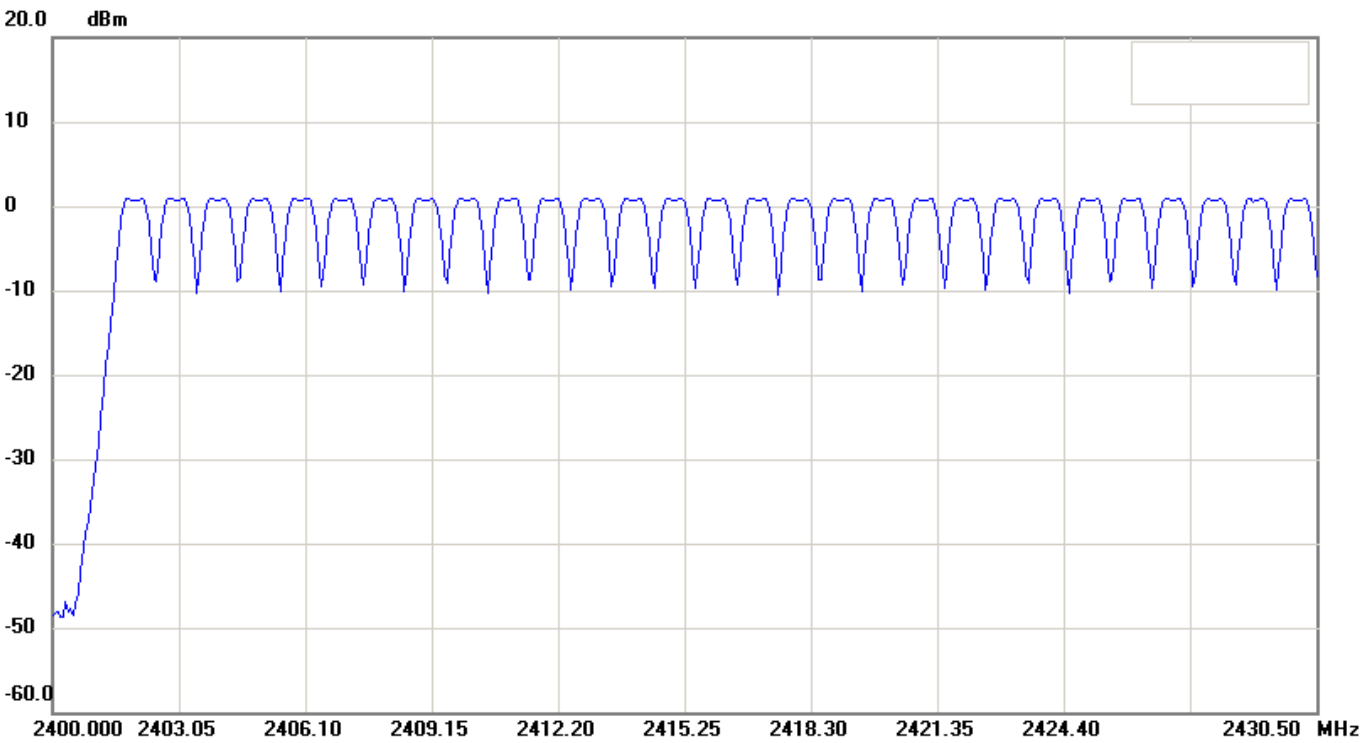

Condition:		RF Conducted
EUT:	Development Kit for PlayStation5	Sweep Time: 1ms Att.: 25dB
Model:	DFI-D1000AA	RBW: 300 KHz VBW: 300 KHz
Test Mode:	BT	Operator: Phillip
Note:	NCC_LP0002_BT Number of Hopping Channels -Part1	

File: 20-10-MAS-019_BT1


#22

Date: 2020/10/8

Temperature: 24 °C

Site: RF-Cond01

Humidity: 53 %

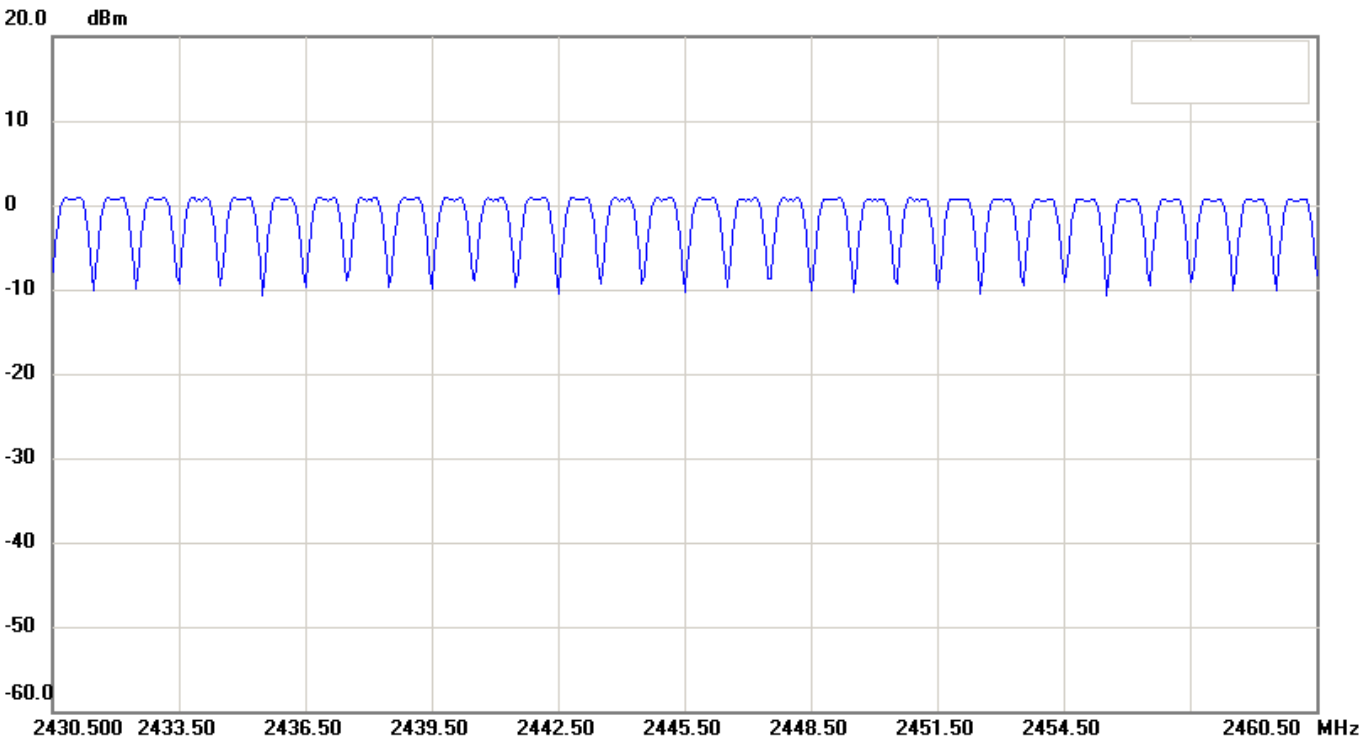

Condition:

EUT: Development Kit for PlayStation5

Model: DFI-D1000AA

Test Mode: BT

Note: NCC_LP0002_BT Number of Hopping Channels -Part2

RF Conducted

Sweep Time: 1ms

RBW: 300 KHz

Operator:

Att.: 25dB

VBW: 300 KHz

Phillip

File: 20-10-MAS-019_BT1


#23

Date: 2020/10/8

Temperature: 24 °C

Site: RF-Cond01

Humidity: 53 %

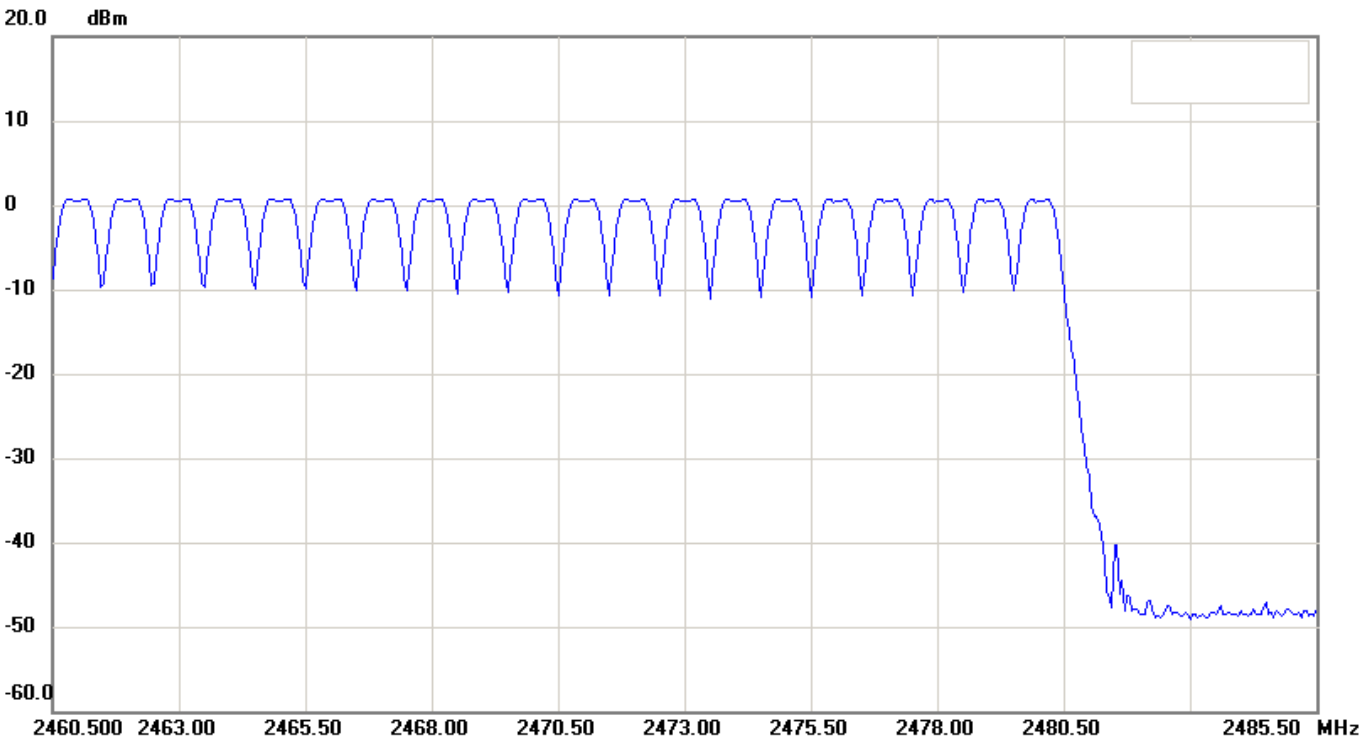

Condition:

EUT:

Model:

Test Mode:

Note:

Development Kit for PlayStation5

DFI-D1000AA

BT

NCC_LP0002_BT Number of Hopping Channels -Part3

RF Conducted

Sweep Time: 1ms

RBW: 300 KHz

Operator:

Att.: 25dB

VBW: 300 KHz

Phillip

BT_Module2

File: 20-10-MAS-019_BT2


#21

Date: 2020/10/8

Temperature: 24 °C

Site: RF-Cond01

Humidity: 53 %

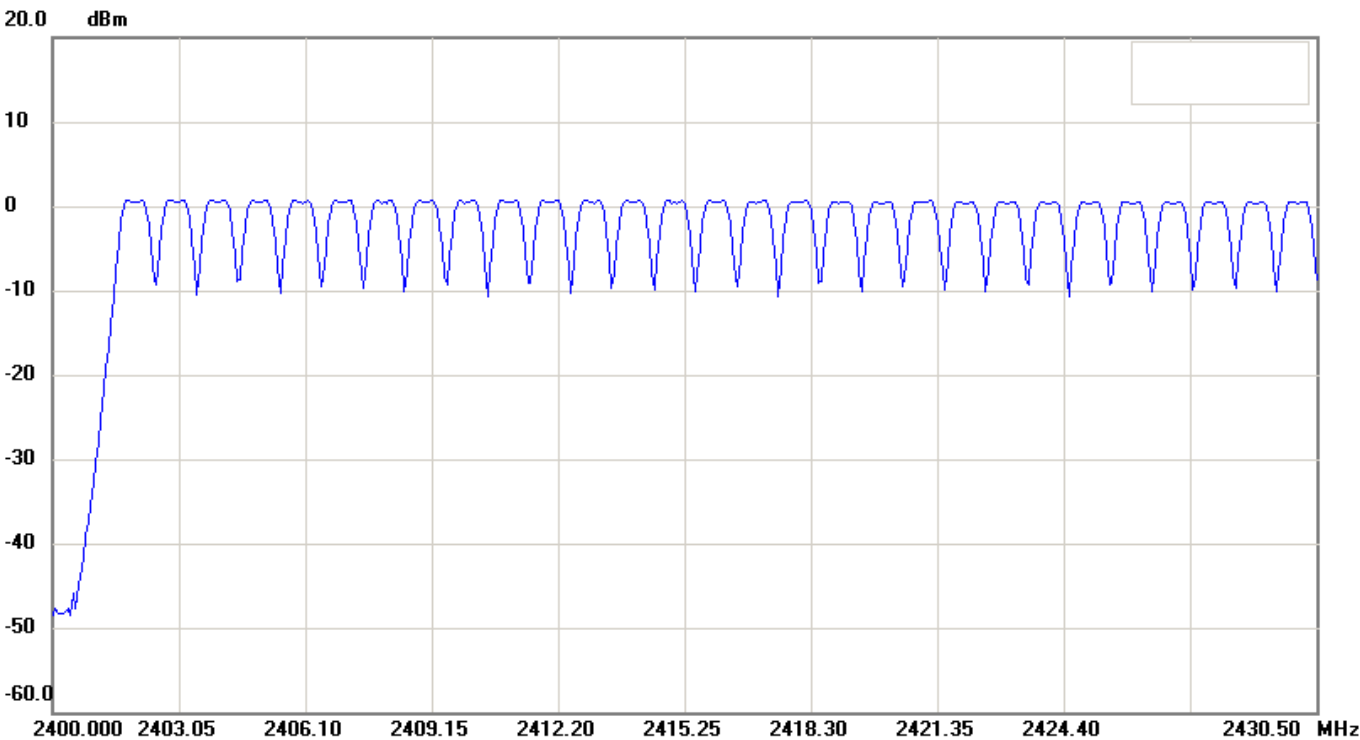

Condition:

EUT:

Model:

Test Mode:

Note:

Development Kit for PlayStation5

DFI-D1000AA

BT

NCC_LP0002_BT Number of Hopping Channels -Part1

RF Conducted

Sweep Time: 1ms

RBW: 300 KHz

Operator:

Att.: 25dB

VBW: 300 KHz

Phillip

File: 20-10-MAS-019_BT2


#22

Date: 2020/10/8

Temperature: 24 °C

Site: RF-Cond01

Humidity: 53 %

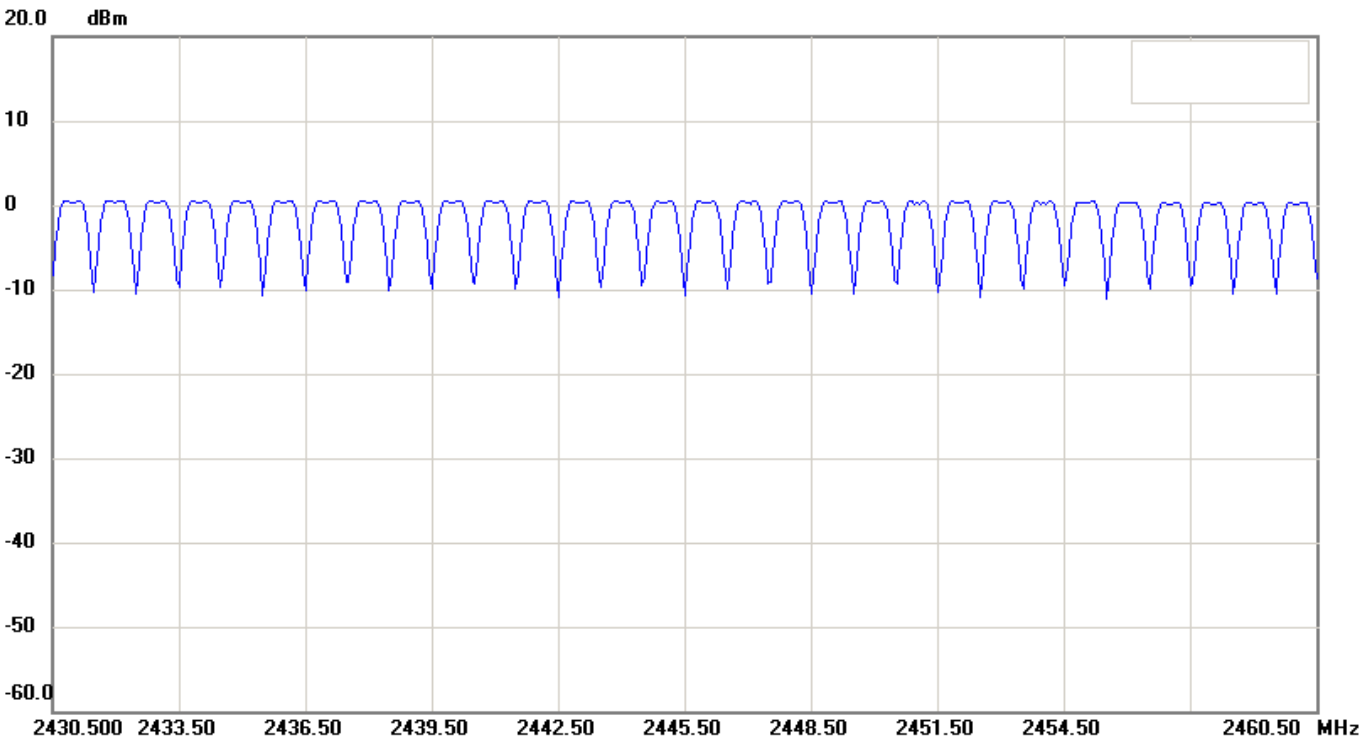

Condition:

EUT: Development Kit for PlayStation5

Model: DFI-D1000AA

Test Mode: BT

Note: NCC_LP0002_BT Number of Hopping Channels -Part2

RF Conducted

Sweep Time: 1ms

RBW: 300 KHz

Operator:

Att.: 25dB

VBW: 300 KHz

Phillip

File: 20-10-MAS-019_BT2


#23

Date: 2020/10/8

Temperature: 24 °C

Site: RF-Cond01

Humidity: 53 %

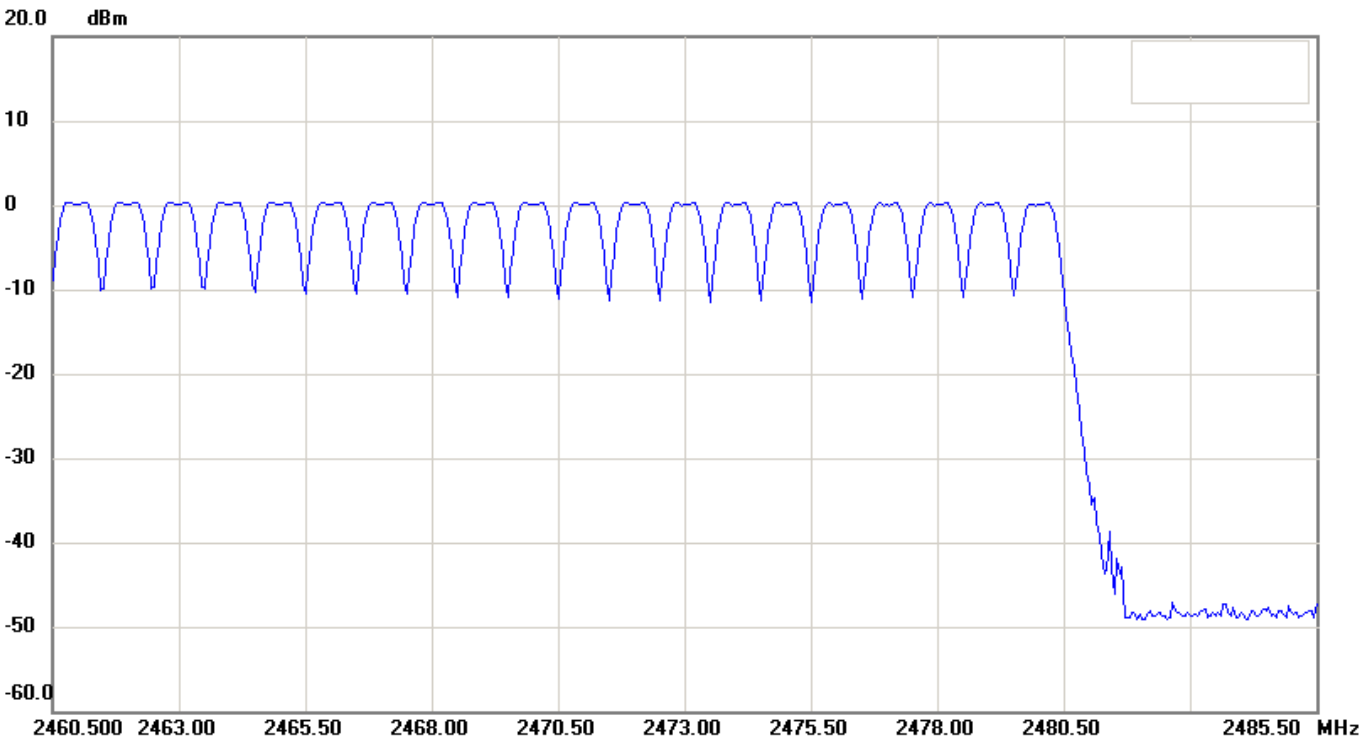

Condition:

EUT: Development Kit for PlayStation5

Model: DFI-D1000AA

Test Mode: BT

Note: NCC_LP0002_BT Number of Hopping Channels -Part3

RF Conducted

Sweep Time: 1ms

RBW: 300 KHz

Operator:

Att.: 25dB

VBW: 300 KHz

Phillip

BT_Module1

File: 20-10-MAS-019_BT1


#20

Date: 2020/10/8

Temperature: 24 °C

Site: RF-Cond01

Humidity: 53 %

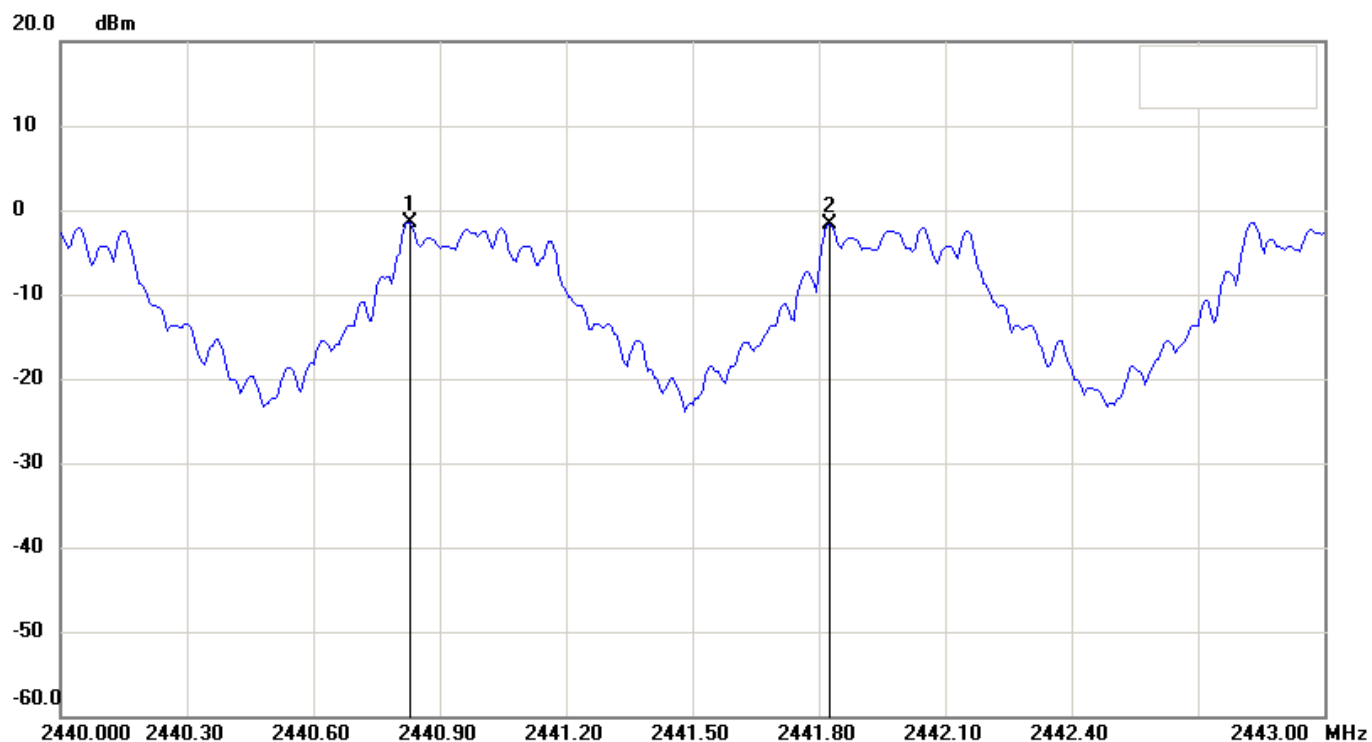

Condition:

EUT: Development Kit for PlayStation5

Model: DFI-D1000AA

Test Mode: BT

Note: NCC_LP0002_BT Carrier Frequency Separation

RF Conducted

Sweep Time: 1.05ms Att.: 25dB

RBW: 30 KHz VBW: 100 KHz

Operator: Phillip

No.	Frequency(MHz)	Level(dBm)
1	2440.82800	-1.57
2	2441.82400	-1.78

No.		Δ Frequency(MHz)	Δ Level(dB)
1	mk2-mk1	0.996	-0.21


File: 20-10-MAS-019_BT1
Site: RF-Cond01

#2

Date: 2020/10/8

Temperature: 24 °C

Humidity: 53 %

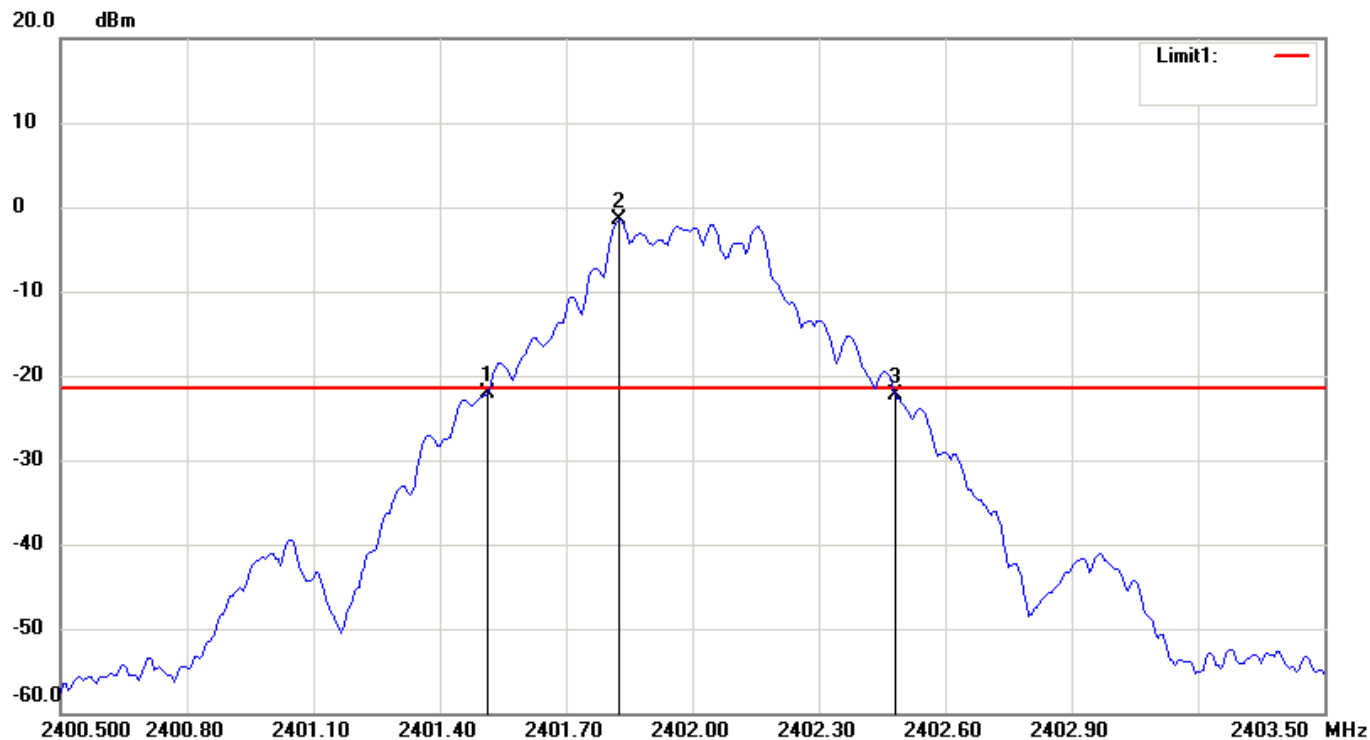

Condition: -21.55dBm
EUT: Development Kit for PlayStation5
Model: DFI-D1000AA
Test Mode: BT
Note: NCC_LP0002_BT CH00-20dB EBW

RF Conducted
Sweep Time: 1.05ms Att.: 25dB
RBW: 30 KHz VBW: 100 KHz
Operator: Phillip

No.	Frequency(MHz)	Level(dBm)
1	2401.51400	-22.07
2	2401.82600	-1.55
3	2402.48000	-22.20

No.		Δ Frequency(MHz)	Δ Level(dB)
1	mk3-mk1	0.966	-0.13


File: 20-10-MAS-019_BT1
Site: RF-Cond01

#10

Date: 2020/10/8

Temperature: 24 °C

Humidity: 53 %

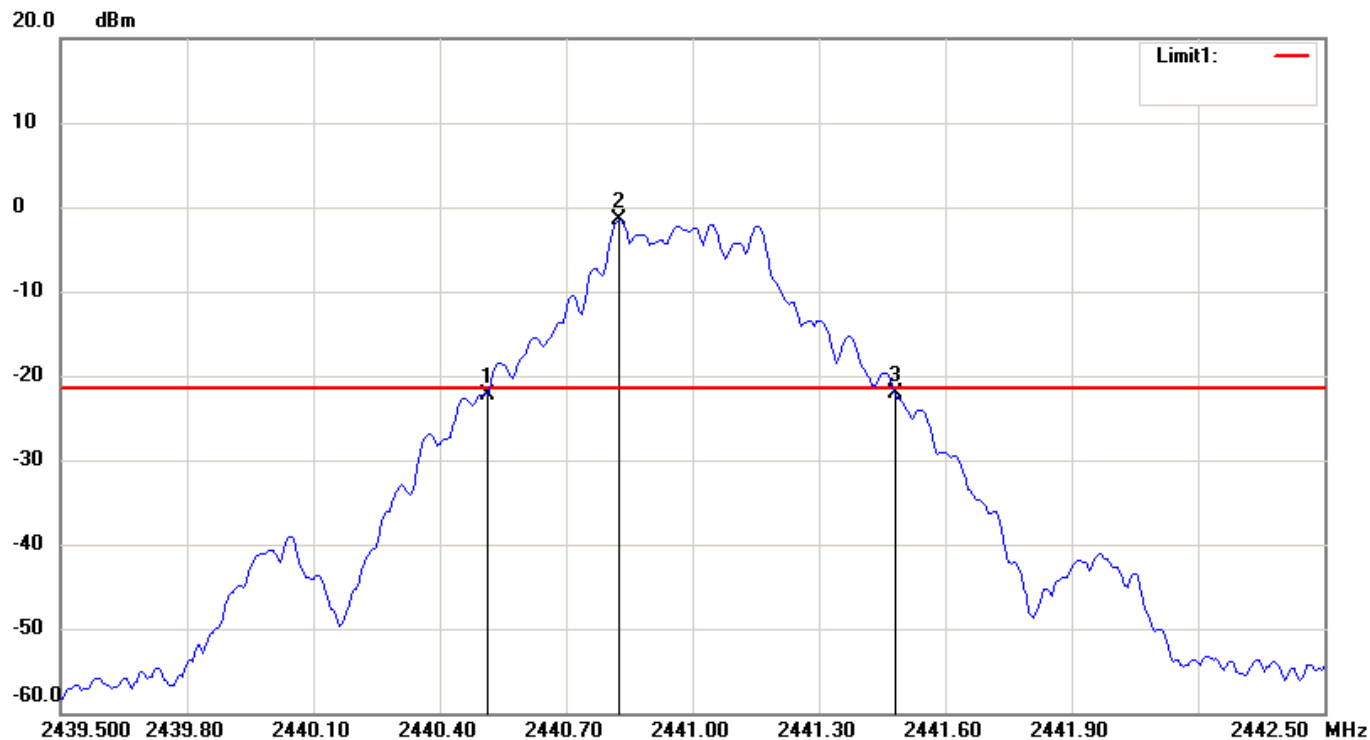

Condition: -21.56dBm
EUT: Development Kit for PlayStation5
Model: DFI-D1000AA
Test Mode: BT
Note: NCC_LP0002_BT CH39-20dB EBW

RF Conducted
Sweep Time: 1.05ms Att.: 25dB
RBW: 30 KHz VBW: 100 KHz
Operator: Phillip

No.	Frequency(MHz)	Level(dBm)
1	2440.51400	-22.22
2	2440.82600	-1.56
3	2441.48000	-22.11

No.		Δ Frequency(MHz)	Δ Level(dB)
1	mk3-mk1	0.966	0.11


File: 20-10-MAS-019_BT1
Site: RF-Cond01

#6

Date: 2020/10/8

Temperature: 24 °C

Humidity: 53 %

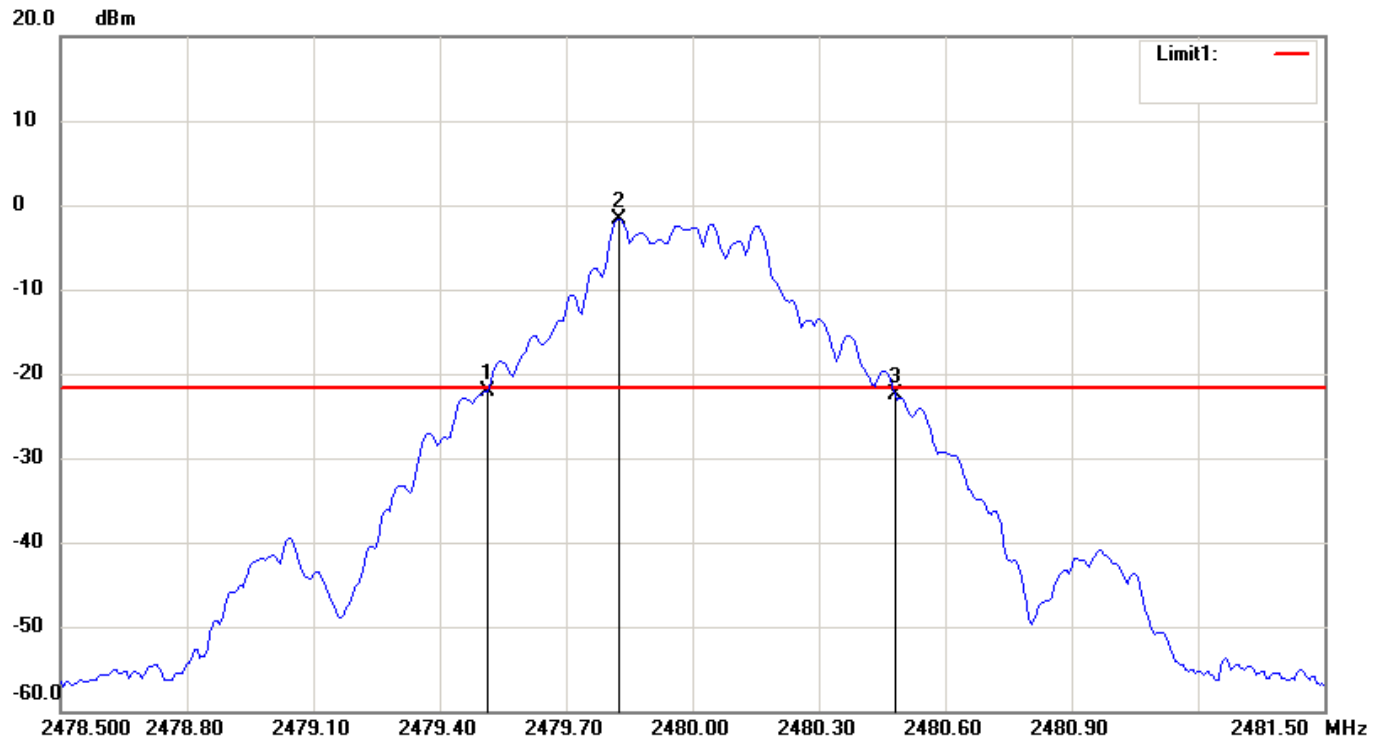

Condition: -21.7dBm
EUT: Development Kit for PlayStation5
Model: DFI-D1000AA
Test Mode: BT
Note: NCC_LP0002_BT CH78-20dB EBW

RF Conducted
Sweep Time: 1.05ms Att.: 25dB
RBW: 30 KHz VBW: 100 KHz
Operator: Phillip

No.	Frequency(MHz)	Level(dBm)
1	2479.51400	-22.16
2	2479.82600	-1.70
3	2480.48000	-22.58

No.		Δ Frequency(MHz)	Δ Level(dB)
1	mk3-mk1	0.966	-0.42


File: 20-10-MAS-019_BT1
Site: RF-Cond01

#25

Date: 2020/10/8

Temperature: 24 °C

Humidity: 53 %

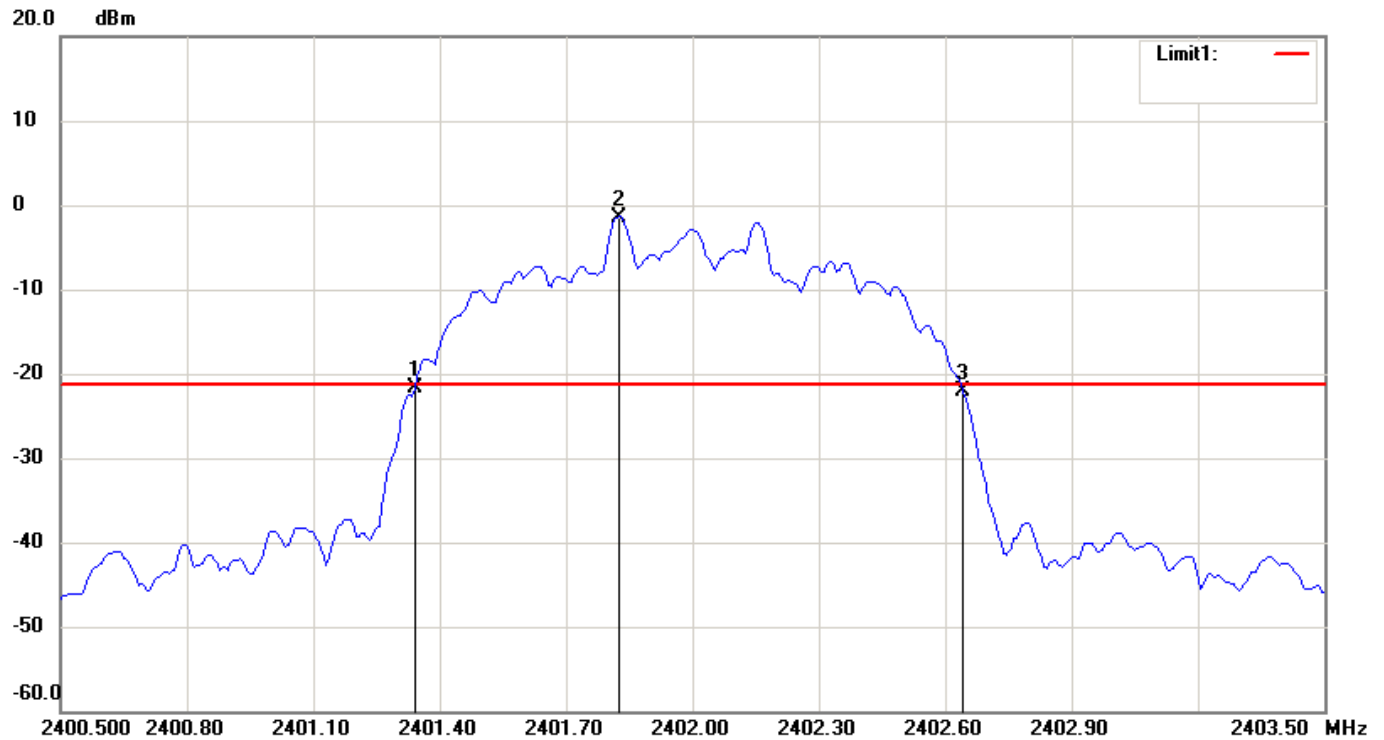

Condition: -21.4dBm
EUT: Development Kit for PlayStation5
Model: DFI-D1000AA
Test Mode: BT
Note: NCC_LP0002_BT CH00-20dB EBW

RF Conducted
Sweep Time: 1.05ms Att.: 25dB
RBW: 30 KHz VBW: 100 KHz
Operator: Phillip

No.	Frequency(MHz)	Level(dBm)
1	2401.34000	-21.77
2	2401.82600	-1.40
3	2402.64200	-22.02

No.		Δ Frequency(MHz)	Δ Level(dB)
1	mk3-mk1	1.302	-0.25


File: 20-10-MAS-019_BT1
Site: RF-Cond01

#33

Date: 2020/10/8

Temperature: 24 °C

Humidity: 53 %

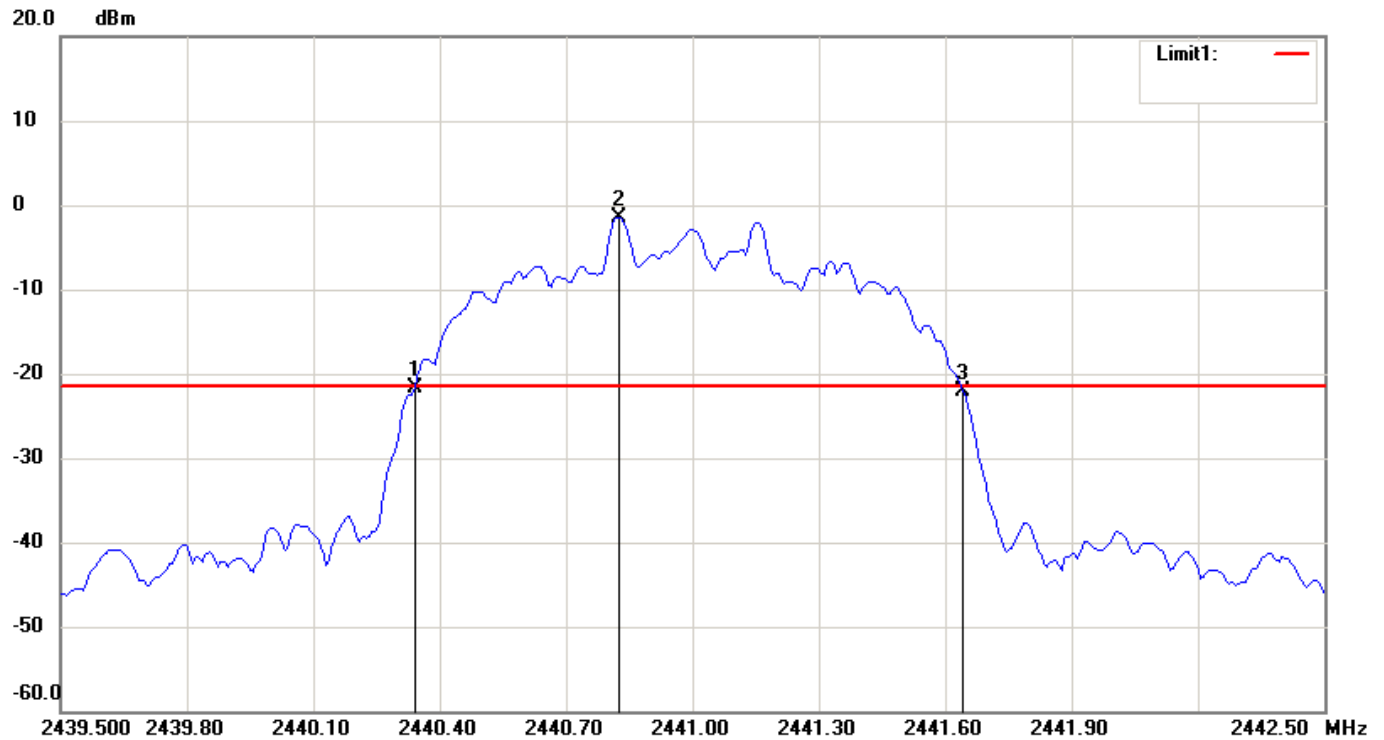

Condition: -21.41dBm
EUT: Development Kit for PlayStation5
Model: DFI-D1000AA
Test Mode: BT
Note: NCC_LP0002_BT CH39-20dB EBW

RF Conducted
Sweep Time: 1.05ms Att.: 25dB
RBW: 30 KHz VBW: 100 KHz
Operator: Phillip

No.	Frequency(MHz)	Level(dBm)
1	2440.34000	-21.75
2	2440.82600	-1.41
3	2441.64200	-22.06

No.		Δ Frequency(MHz)	Δ Level(dB)
1	mk3-mk1	1.302	-0.31


File: 20-10-MAS-019_BT1
Site: RF-Cond01

#29

Date: 2020/10/8

Temperature: 24 °C

Humidity: 53 %

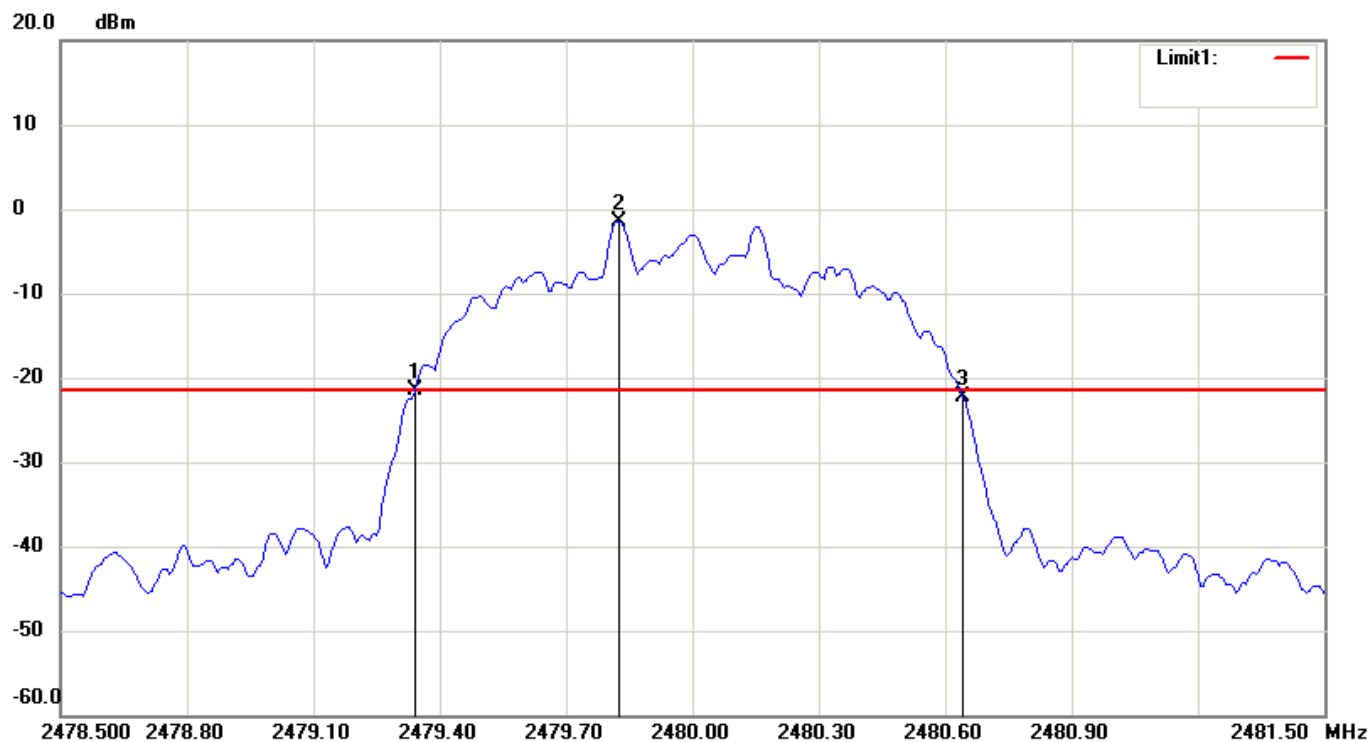

Condition: -21.53dBm
EUT: Development Kit for PlayStation5
Model: DFI-D1000AA
Test Mode: BT
Note: NCC_LP0002_BT CH78-20dB EBW

RF Conducted
Sweep Time: 1.05ms Att.: 25dB
RBW: 30 KHz VBW: 100 KHz
Operator: Phillip

No.	Frequency(MHz)	Level(dBm)
1	2479.34000	-21.54
2	2479.82600	-1.53
3	2480.64200	-22.29

No.		Δ Frequency(MHz)	Δ Level(dB)
1	mk3-mk1	1.302	-0.75

BT_Module2

File: 20-10-MAS-019_BT2


#20

Date: 2020/10/8

Temperature: 24 °C

Site: RF-Cond01

Humidity: 53 %

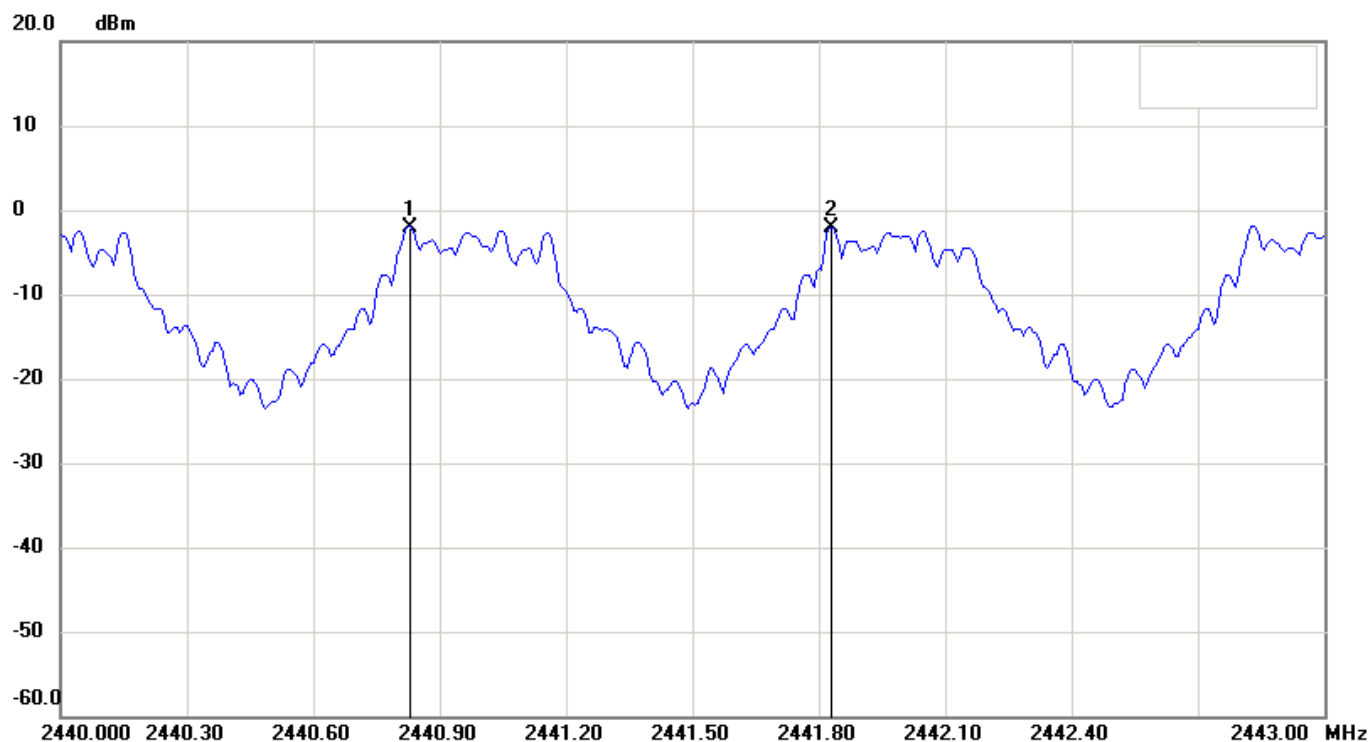

Condition:

EUT: Development Kit for PlayStation5

RF Conducted

Sweep Time: 1.05ms Att.: 25dB

Model: DFI-D1000AA

RBW: 30 KHz

VBW: 100 KHz

Test Mode: BT

Operator:

Phillip

Note: NCC_LP0002_BT Carrier Frequency Separation

No.	Frequency(MHz)	Level(dBm)
1	2440.82800	-2.00
2	2441.83000	-2.07

No.		Δ Frequency(MHz)	Δ Level(dB)
1	mk2-mk1	1.002	-0.07


File: 20-10-MAS-019_BT2
Site: RF-Cond01

#2

Date: 2020/10/8

Temperature: 24 °C

Humidity: 53 %

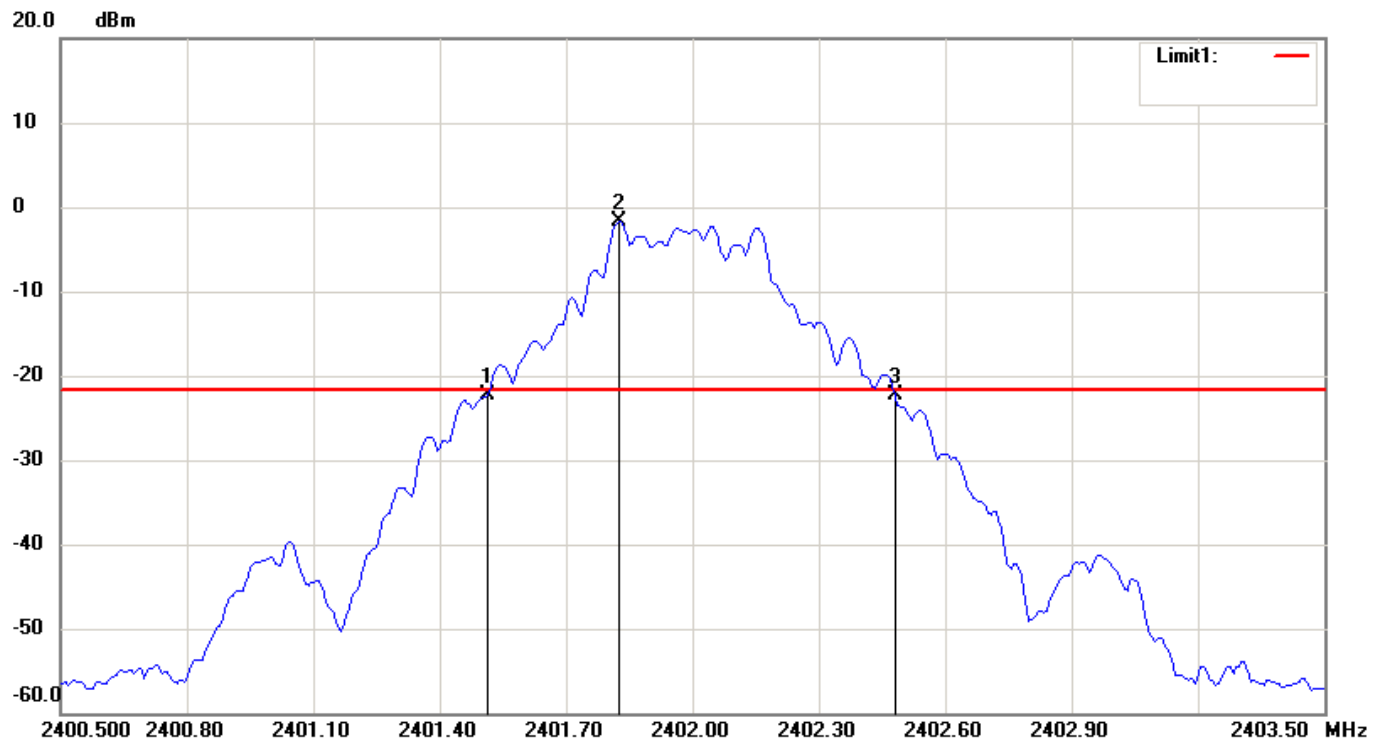

Condition: -21.74dBm
EUT: Development Kit for PlayStation5
Model: DFI-D1000AA
Test Mode: BT
Note: NCC_LP0002_BT CH00-20dB EBW

RF Conducted
Sweep Time: 1.05ms Att.: 25dB
RBW: 30 KHz VBW: 100 KHz
Operator: Phillip

No.	Frequency(MHz)	Level(dBm)
1	2401.51400	-22.31
2	2401.82600	-1.74
3	2402.48000	-22.37

No.		Δ Frequency(MHz)	Δ Level(dB)
1	mk3-mk1	0.966	-0.06


File: 20-10-MAS-019_BT2
Site: RF-Cond01

#10

Date: 2020/10/8

Temperature: 24 °C

Humidity: 53 %

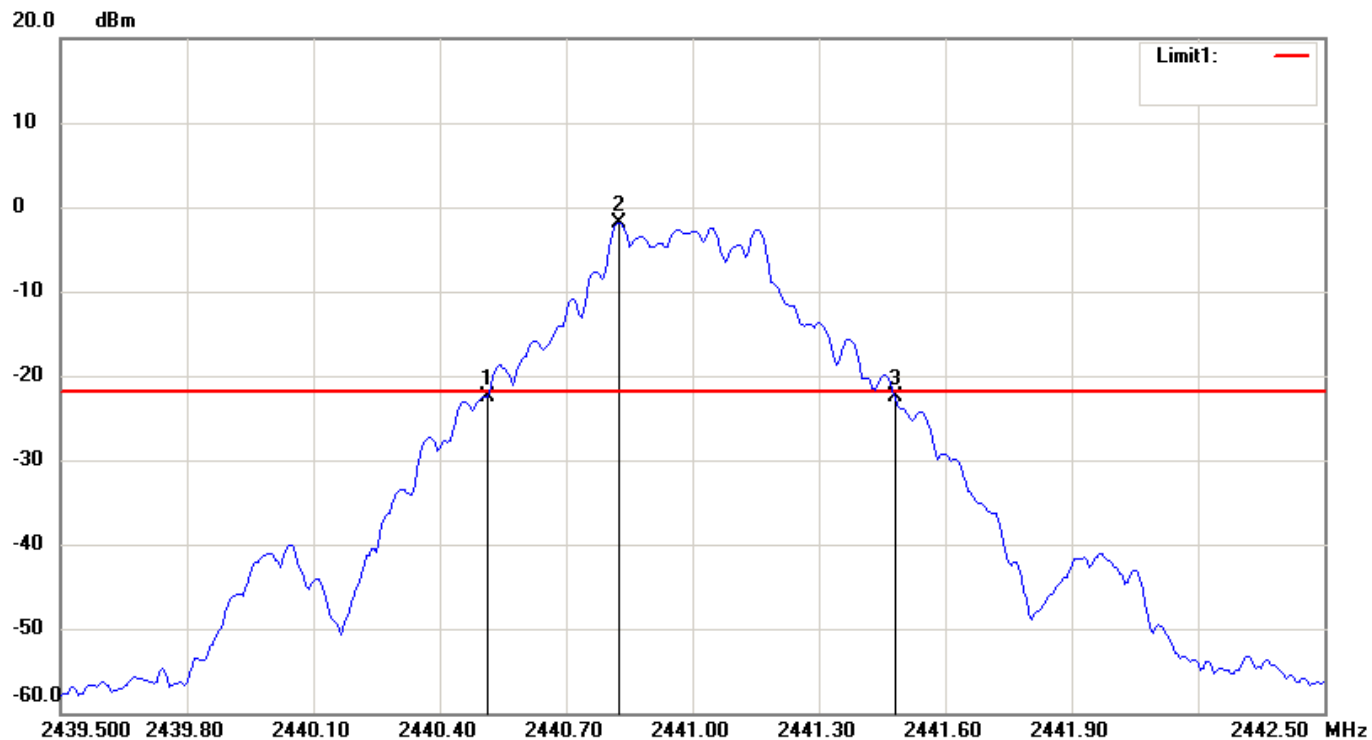

Condition: -21.85dBm
EUT: Development Kit for PlayStation5
Model: DFI-D1000AA
Test Mode: BT
Note: NCC_LP0002_BT CH39-20dB EBW

RF Conducted
Sweep Time: 1.05ms Att.: 25dB
RBW: 30 KHz VBW: 100 KHz
Operator: Phillip

No.	Frequency(MHz)	Level(dBm)
1	2440.51400	-22.48
2	2440.82600	-1.85
3	2441.48000	-22.48

No.		Δ Frequency(MHz)	Δ Level(dB)
1	mk3-mk1	0.966	0


File: 20-10-MAS-019_BT2
Site: RF-Cond01

#6

Date: 2020/10/8

Temperature: 24 °C

Humidity: 53 %

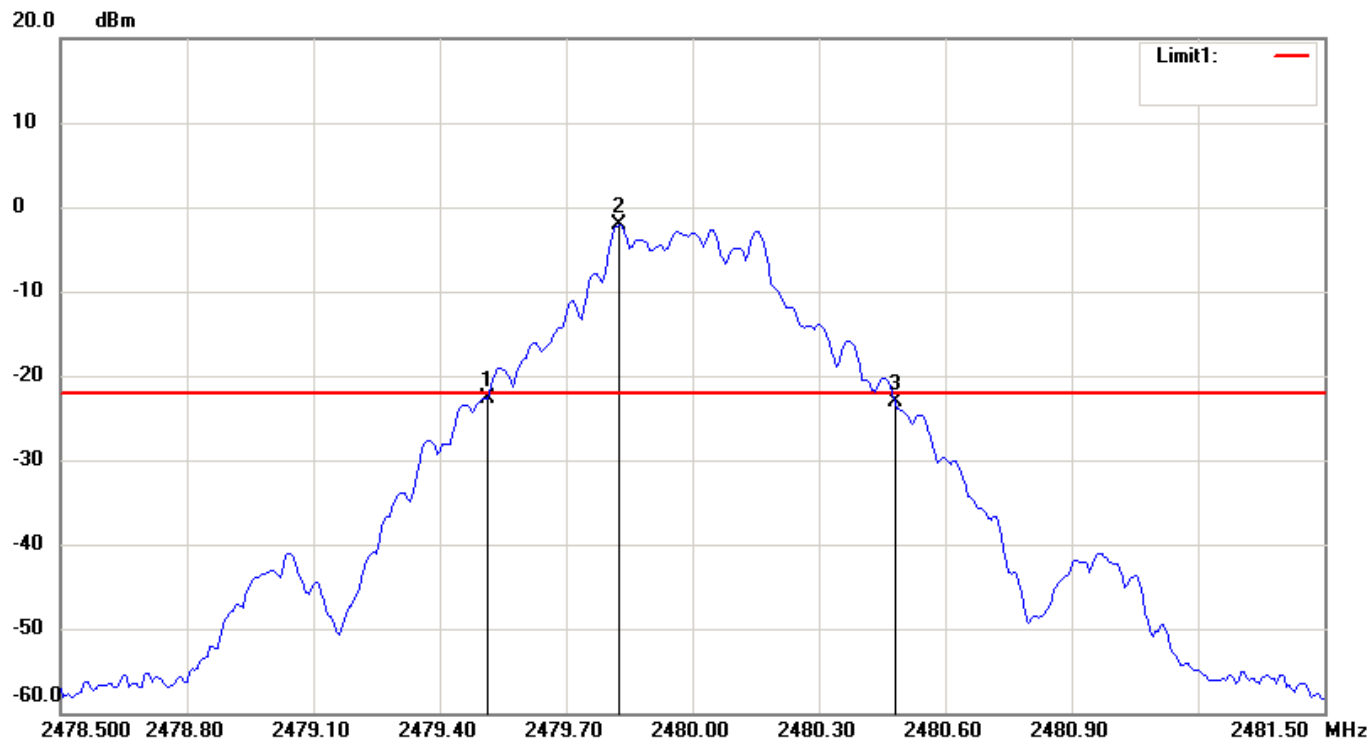

Condition: -22.13dBm
EUT: Development Kit for PlayStation5
Model: DFI-D1000AA
Test Mode: BT
Note: NCC_LP0002_BT CH78-20dB EBW

RF Conducted
Sweep Time: 1.05ms Att.: 25dB
RBW: 30 KHz VBW: 100 KHz
Operator: Phillip

No.	Frequency(MHz)	Level(dBm)
1	2479.51400	-22.64
2	2479.82600	-2.13
3	2480.48000	-23.10

No.		Δ Frequency(MHz)	Δ Level(dB)
1	mk3-mk1	0.966	-0.46


File: 20-10-MAS-019_BT2
Site: RF-Cond01

#25

Date: 2020/10/8

Temperature: 24 °C

Humidity: 53 %

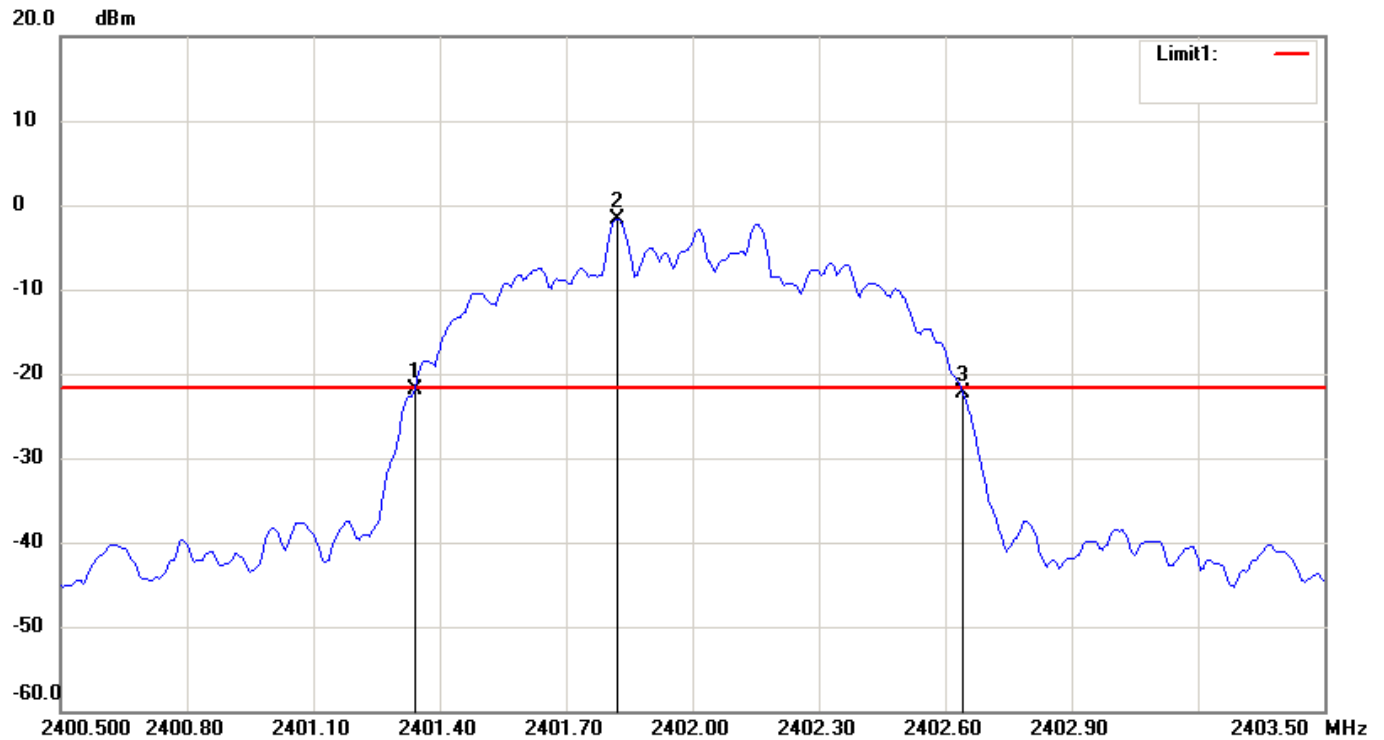

Condition: -21.72dBm
EUT: Development Kit for PlayStation5
Model: DFI-D1000AA
Test Mode: BT
Note: NCC_LP0002_BT CH00-20dB EBW

RF Conducted
Sweep Time: 1.05ms Att.: 25dB
RBW: 30 KHz VBW: 100 KHz
Operator: Phillip

No.	Frequency(MHz)	Level(dBm)
1	2401.34000	-21.95
2	2401.82000	-1.72
3	2402.64200	-22.27

No.		Δ Frequency(MHz)	Δ Level(dB)
1	mk3-mk1	1.302	-0.32


File: 20-10-MAS-019_BT2
Site: RF-Cond01

#33

Date: 2020/10/8

Temperature: 24 °C

Humidity: 53 %

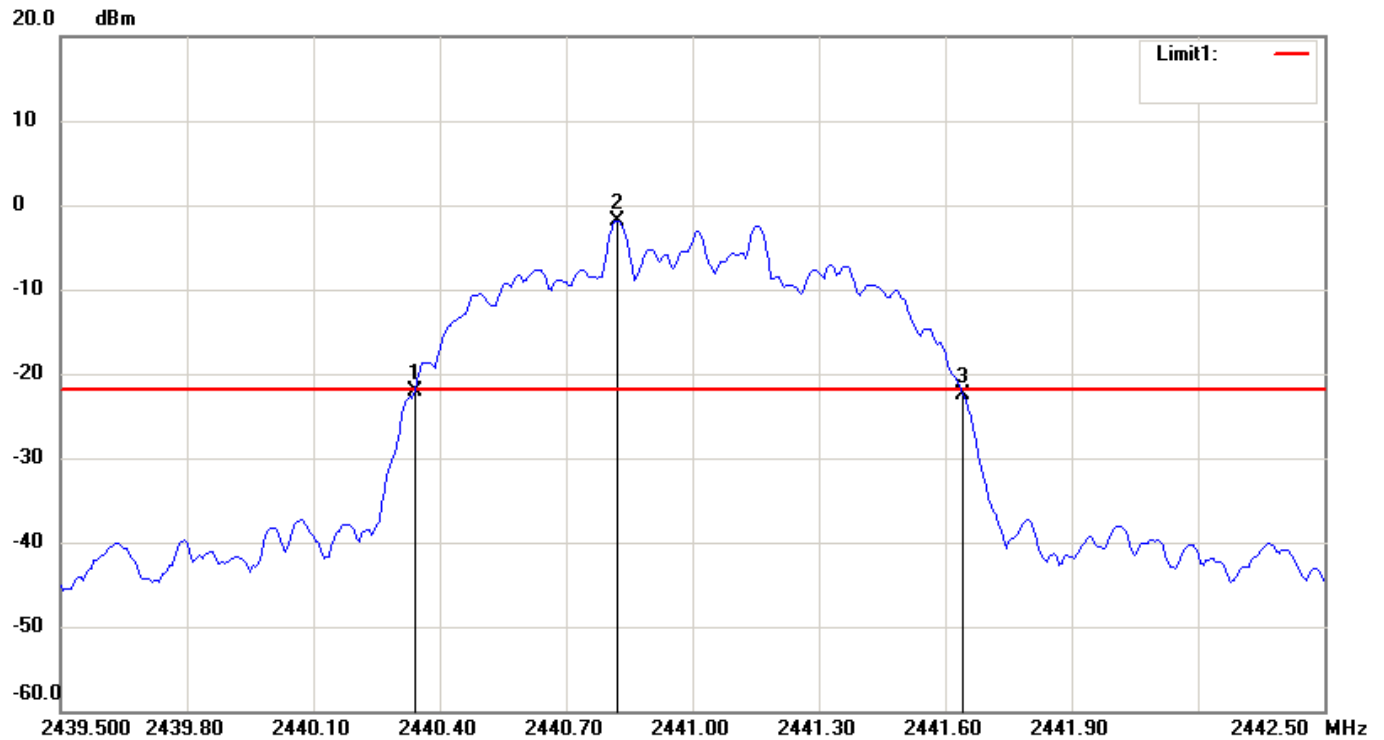

Condition: -21.84dBm
EUT: Development Kit for PlayStation5
Model: DFI-D1000AA
Test Mode: BT
Note: NCC_LP0002_BT CH39-20dB EBW

RF Conducted
Sweep Time: 1.05ms Att.: 25dB
RBW: 30 KHz VBW: 100 KHz
Operator: Phillip

No.	Frequency(MHz)	Level(dBm)
1	2440.34000	-22.02
2	2440.82000	-1.84
3	2441.64200	-22.44

No.		Δ Frequency(MHz)	Δ Level(dB)
1	mk3-mk1	1.302	-0.42


File: 20-10-MAS-019_BT2
Site: RF-Cond01

#29

Date: 2020/10/8

Temperature: 24 °C

Humidity: 53 %

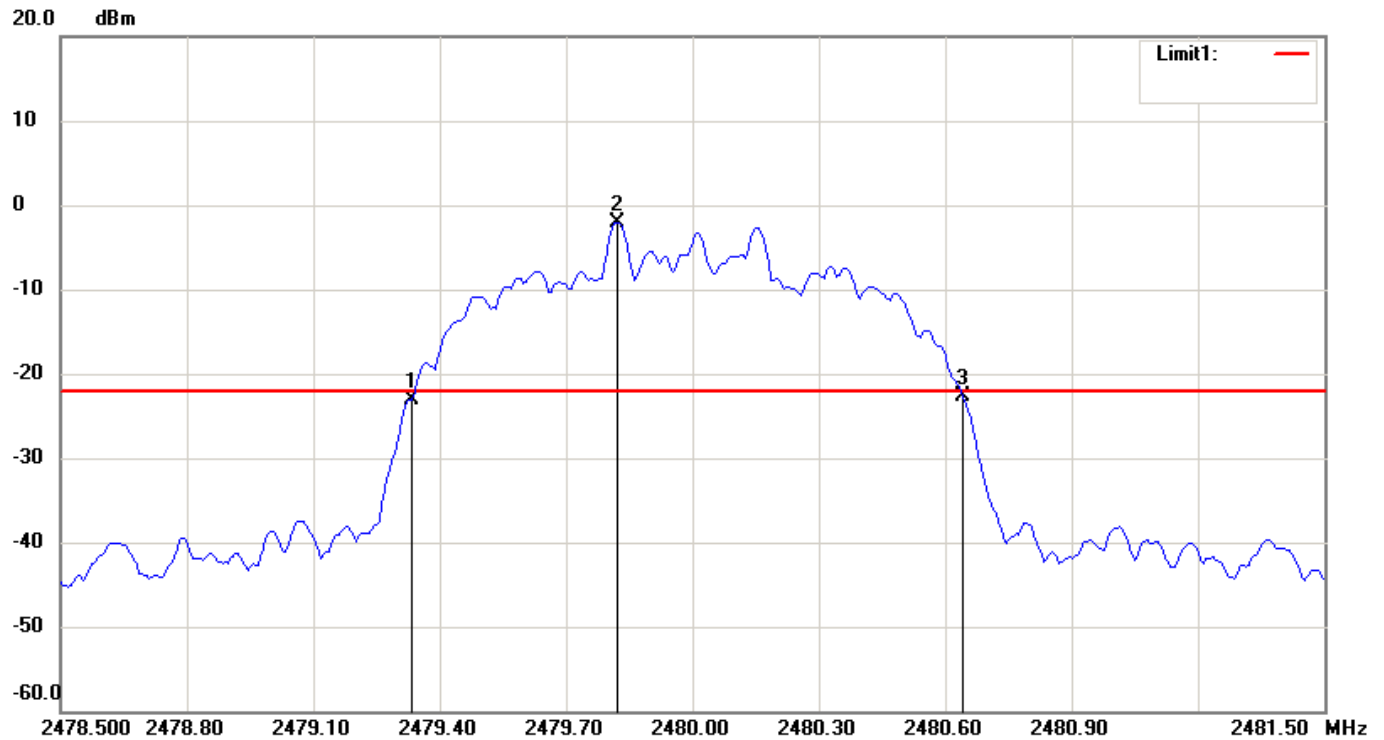

Condition: -22.1dBm
EUT: Development Kit for PlayStation5
Model: DFI-D1000AA
Test Mode: BT
Note: NCC_LP0002_BT CH78-20dB EBW

RF Conducted
Sweep Time: 1.05ms Att.: 25dB
RBW: 30 KHz VBW: 100 KHz
Operator: Phillip

No.	Frequency(MHz)	Level(dBm)
1	2479.33400	-23.07
2	2479.82000	-2.10
3	2480.64200	-22.74

No.		Δ Frequency(MHz)	Δ Level(dB)
1	mk3-mk1	1.308	0.33

8.4.3 跳頻頻道載波之佔用時間

8.4.3.1 BT_Module1

8.4.3.1.1 DH1 Mode

週期之計算: $79(\text{頻道數}) \times 0.4 = 31.6 \text{ 秒}$

週期內跳頻次數之計算：

本系統每秒跳頻 1600 次，故每次跳頻時間為 $1 / 1600 = 0.625\text{ms}$ 。而每個 package 需要 1 次發射及 1 次接收，故每秒於 79 個頻道中只發射 800 次，平均每秒每個頻道之發射次數為 $800 / 79 = 10.13 \text{ 次}$ 。故於週期(31.6 秒)內每個頻道發射次數為 $10.13 \times 31.6 = 320.1 \text{ 次}$ 。

31.6秒內之最長佔用時間為 $0.390 \text{ ms} \times 320.1 \text{ 次} = 124.8 \text{ ms}$ 。

計算結果：佔用之平均時間少於0.4秒，合乎標準規定。

註：繪圖資料請參考第96頁。

DH1 Mode

File: 20-10-MAS-019_BT1


#15

Date: 2020/10/8

Temperature: 24 °C

Site: RF-Cond01

Humidity: 53 %

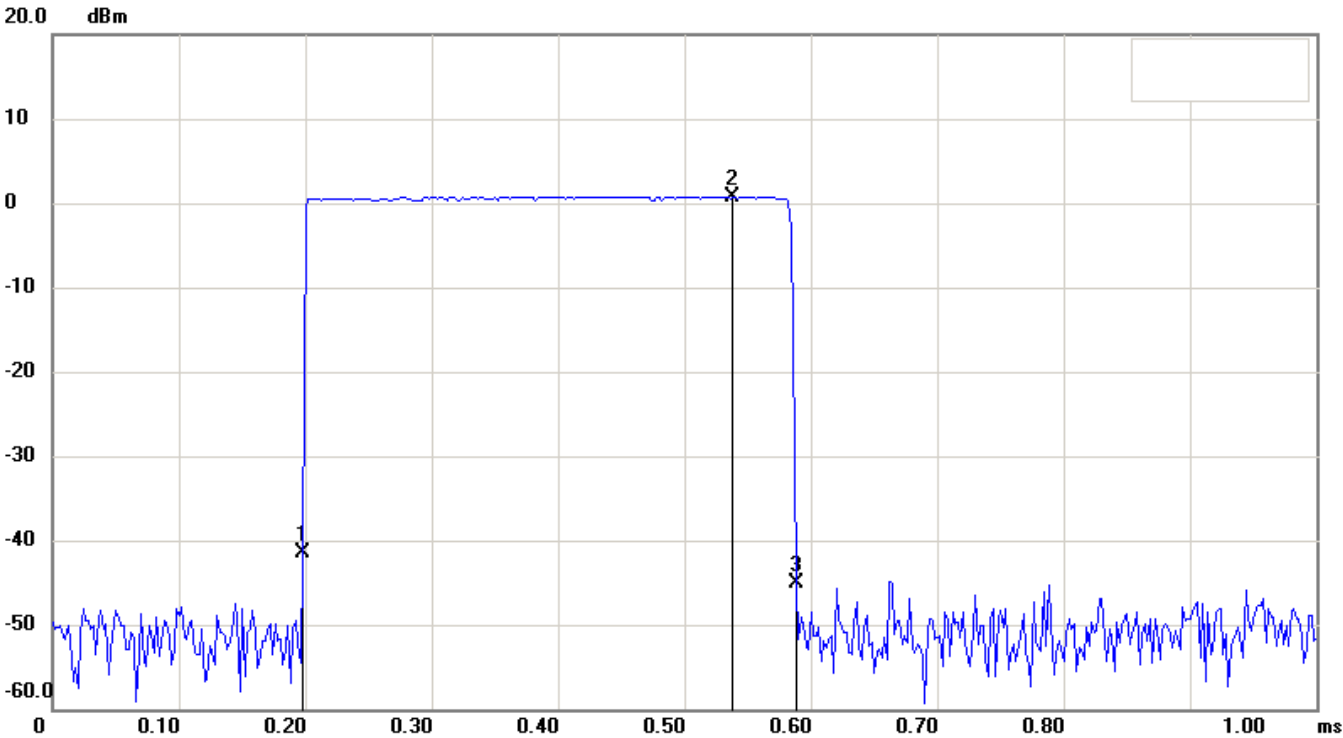

Condition: -19.28dBm

RF Conducted

EUT: Development Kit for PlayStation5

Sweep Time: 1ms Att.: 25dB

Model: DFI-D1000AA

RBW: 1000 KHz VBW: 1000 KHz

Test Mode: BT

Operator: Phillip

Note: NCC_LP0002_DH1 pulse width

No.	Sweep time(ms)	Level(dBm)
1	0.1980	-41.43
2	0.5380	0.72
3	0.5880	-45.10

No.		Δ Time(ms)	Δ Level(dB)
1	mk3-mk1	0.39	-3.67

8.4.3.1.2 DH3 Mode

週期之計算: $79(\text{頻道數}) \times 0.4 = 31.6 \text{ 秒}$

週期內跳頻次數之計算：

本系統每秒跳頻 1600 次，故每次跳頻時間為 $1 / 1600 = 0.625\text{ms}$ 。而每個 package 需要 3 次發射及 1 次接收，故每秒於 79 個頻道中只發射 400 次，平均每秒每個頻道之發射次數為 $400 / 79 = 5.06 \text{ 次}$ 。故於週期(31.6 秒)內每個頻道發射次數為 $5.06 \times 31.6 = 159.9 \text{ 次}$ 。

31.6秒內之最長佔用時間為 $1.656 \text{ ms} \times 159.9 \text{ 次} = 264.8 \text{ ms}$ 。

計算結果：佔用之平均時間少於0.4秒，合乎標準規定。

註：繪圖資料請參考第 98 頁

DH3 Mode


File: 20-10-MAS-019_BT1
 Site: RF-Cond01

#17

Date: 2020/10/8

Temperature: 24 °C

Humidity: 53 %

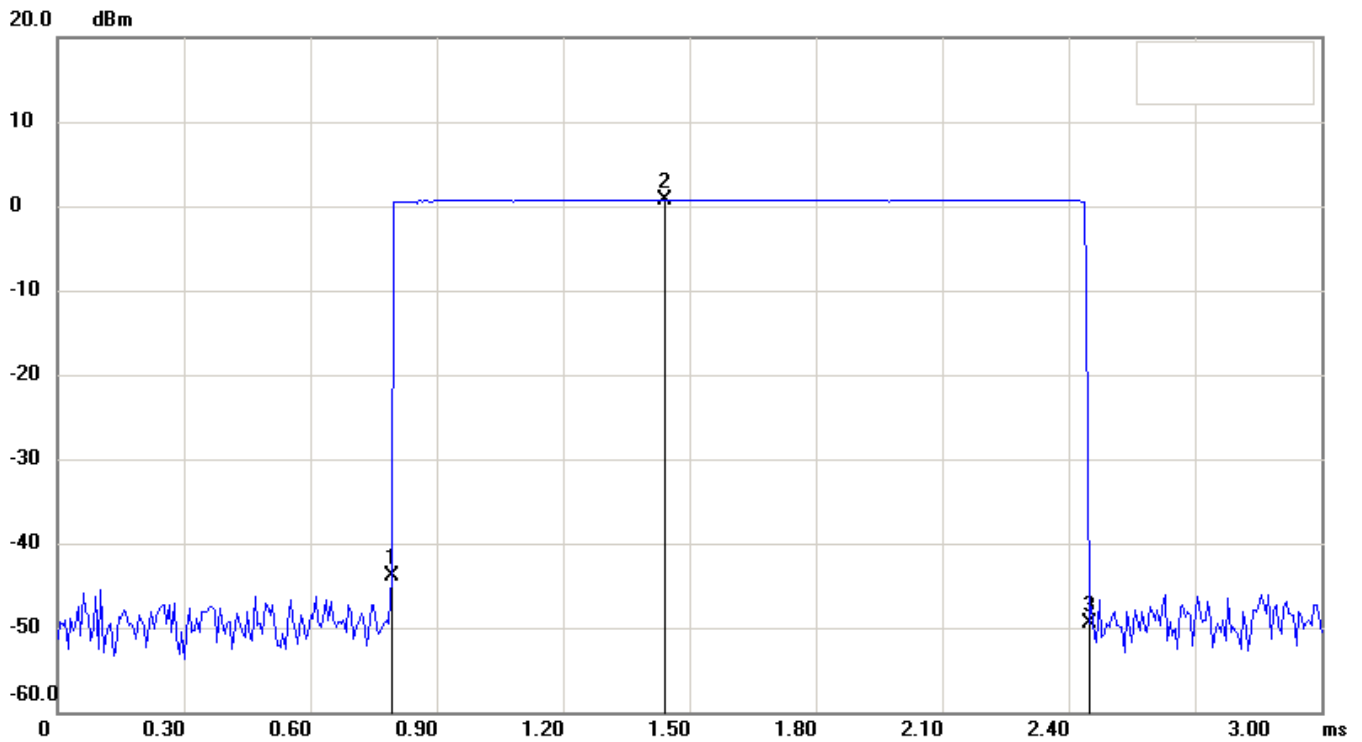

Condition: -19.25dBm
 EUT: Development Kit for PlayStation5
 Model: DFI-D1000AA
 Test Mode: BT
 Note: NCC_LP0002_DH3 pusle width

RF Conducted
 Sweep Time: 3ms Att.: 25dB
 RBW: 1000 KHz VBW: 1000 KHz
 Operator: Phillip

No.	Sweep time(ms)	Level(dBm)
1	0.7920	-43.98
2	1.4400	0.75
3	2.4480	-49.51

No.		Δ Time(ms)	Δ Level(dB)
1	mk3-mk1	1.656	-5.53

8.4.3.1.3 DH5 Mode

週期之計算: $79(\text{頻道數}) \times 0.4 = 31.6 \text{ 秒}$

週期內跳頻次數之計算：

本系統每秒跳頻 1600 次，故每次跳頻時間為 $1 / 1600 = 0.625\text{ms}$ 。而每個 package 需要 5 次發射及 1 次接收，故每秒於 79 個頻道中只發射 266.7 次，平均每秒每個頻道之發射次數為 $266.7 / 79 = 3.38 \text{ 次}$ 。故於週期(31.6 秒)內每個頻道發射次數為 $3.38 \times 31.6 = 106.81 \text{ 次}$ 。

31.6秒內之最長佔用時間為 $2.910 \text{ ms} \times 106.81 \text{ 次} = 310.8 \text{ ms}$ 。

計算結果：佔用之平均時間少於0.4秒，合乎標準規定。

註：繪圖資料請參考第100頁。

DH5 Mode


File: 20-10-MAS-019_BT1
 Site: RF-Cond01

#19

Date: 2020/10/8

Temperature: 24 °C

Humidity: 53 %

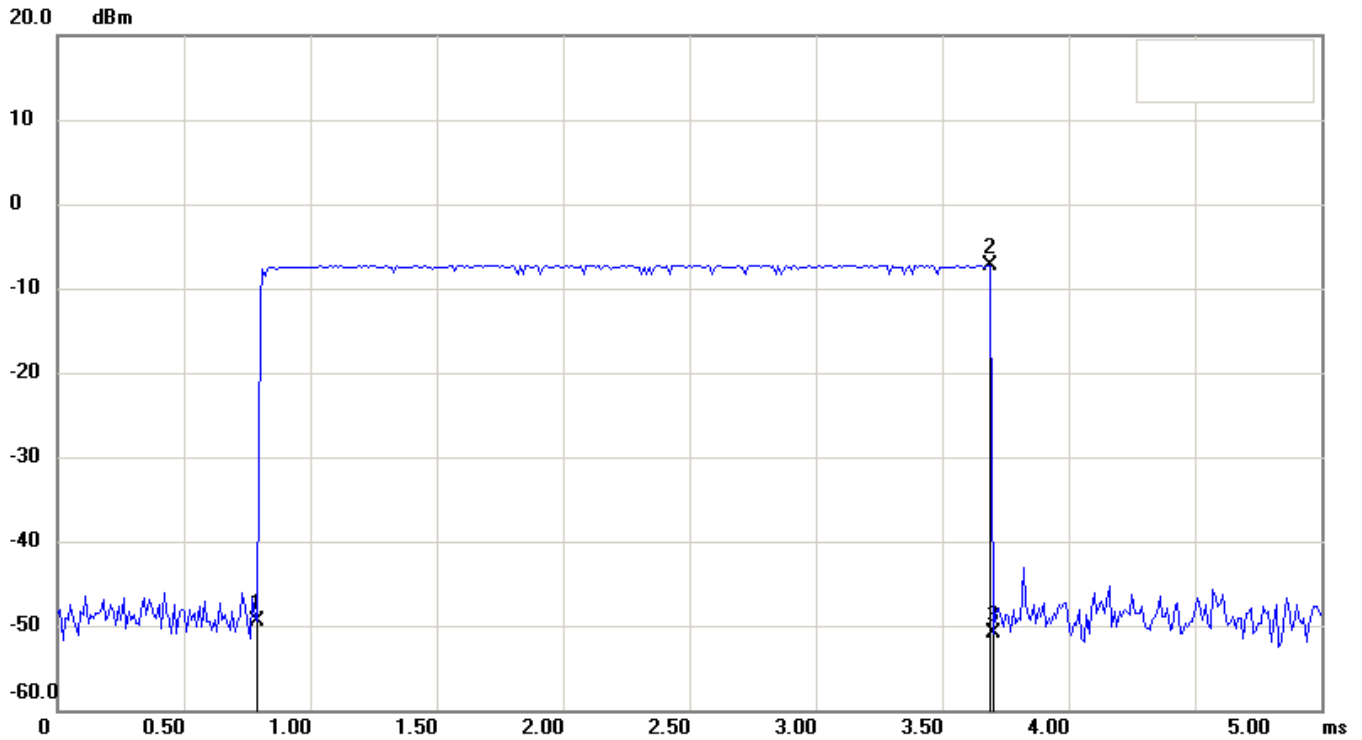

Condition: -27.29dBm
 EUT: Development Kit for PlayStation5
 Model: DFI-D1000AA
 Test Mode: BT
 Note: NCC_LP0002_DH5 pulse width

RF Conducted
 Sweep Time: 5ms Att.: 25dB
 RBW: 1000 KHz VBW: 1000 KHz
 Operator: Phillip

No.	Sweep time(ms)	Level(dBm)
1	0.7900	-49.53
2	3.6900	-7.29
3	3.7000	-50.95

No.		Δ Time(ms)	Δ Level(dB)
1	mk3-mk1	2.91	-1.42

8.4.3.2 BT_Module2

8.4.3.2.1 DH1 Mode

週期之計算: $79(\text{頻道數}) \times 0.4 = 31.6 \text{ 秒}$

週期內跳頻次數之計算：

本系統每秒跳頻 1600 次，故每次跳頻時間為 $1 / 1600 = 0.625\text{ms}$ 。而每個 package 需要 1 次發射及 1 次接收，故每秒於 79 個頻道中只發射 800 次，平均每秒每個頻道之發射次數為 $800 / 79 = 10.13$ 次。故於週期(31.6 秒)內每個頻道發射次數為 $10.13 \times 31.6 = 320.1$ 次。

31.6秒內之最長佔用時間為 $0.390 \text{ ms} \times 320.1 \text{ 次} = 124.8 \text{ ms}$ 。

計算結果：佔用之平均時間少於0.4秒，合乎標準規定。

註：繪圖資料請參考第102頁。

DH1 Mode


File: 20-10-MAS-019_BT2
Site: RF-Cond01

#15

Date: 2020/10/8

Temperature: 24 °C

Humidity: 53 %

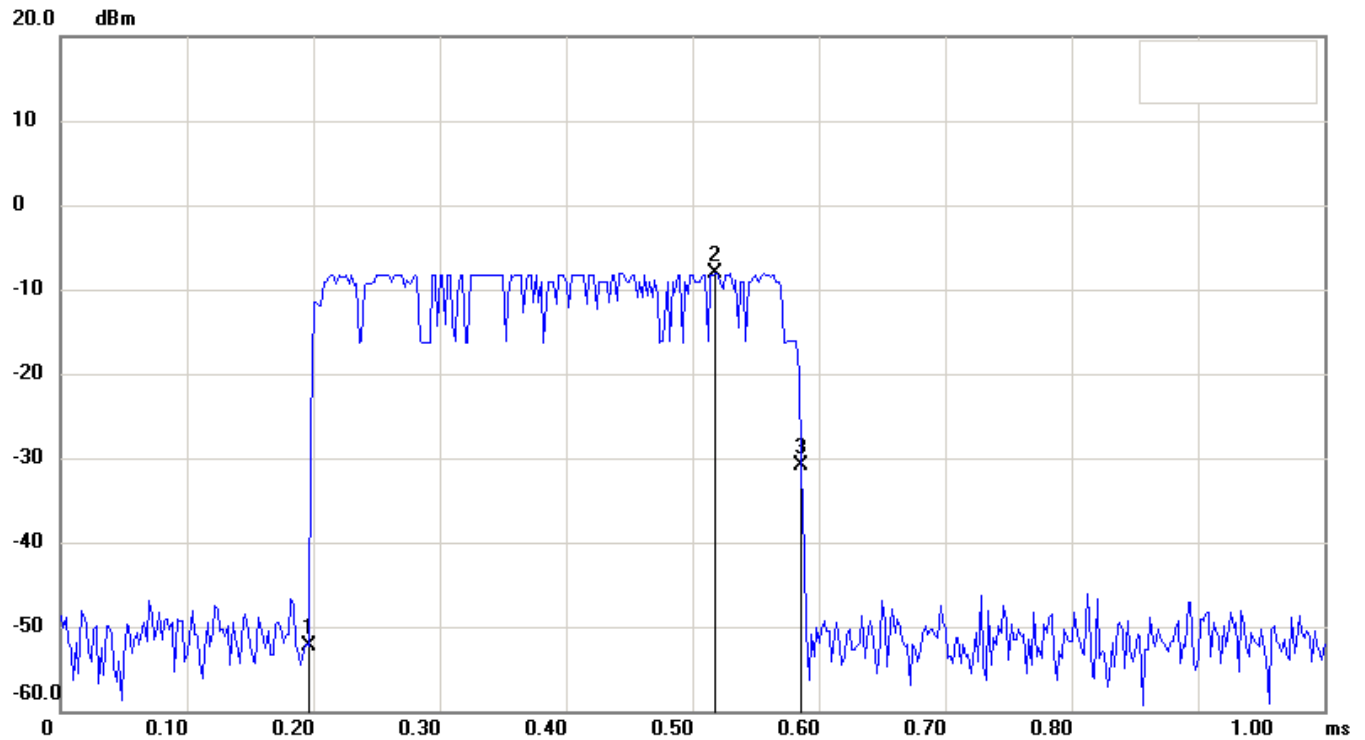

Condition: -28.15dBm
EUT: Development Kit for PlayStation5
Model: DFI-D1000AA
Test Mode: BT
Note: NCC_LP0002_DH1 pulse width

RF Conducted
Sweep Time: 1ms Att.: 25dB
RBW: 1000 KHz VBW: 1000 KHz
Operator: Phillip

No.	Sweep time(ms)	Level(dBm)
1	0.1960	-52.31
2	0.5180	-8.15
3	0.5860	-30.90

No.		Δ Time(ms)	Δ Level(dB)
1	mk3-mk1	0.39	21.41

8.4.3.2.2 DH3 Mode

週期之計算: $79(\text{頻道數}) \times 0.4 = 31.6 \text{ 秒}$

週期內跳頻次數之計算：

本系統每秒跳頻 1600 次，故每次跳頻時間為 $1 / 1600 = 0.625\text{ms}$ 。而每個 package 需要 3 次發射及 1 次接收，故每秒於 79 個頻道中只發射 400 次，平均每秒每個頻道之發射次數為 $400 / 79 = 5.06 \text{ 次}$ 。故於週期(31.6 秒)內每個頻道發射次數為 $5.06 \times 31.6 = 159.9 \text{ 次}$ 。

31.6秒內之最長佔用時間為 $1.656 \text{ ms} \times 159.9 \text{ 次} = 264.8 \text{ ms}$ 。

計算結果：佔用之平均時間少於0.4秒，合乎標準規定。

註：繪圖資料請參考第 104 頁

DH3 Mode


File: 20-10-MAS-019_BT2
 Site: RF-Cond01

#17

Date: 2020/10/8

Temperature: 24 °C

Humidity: 53 %

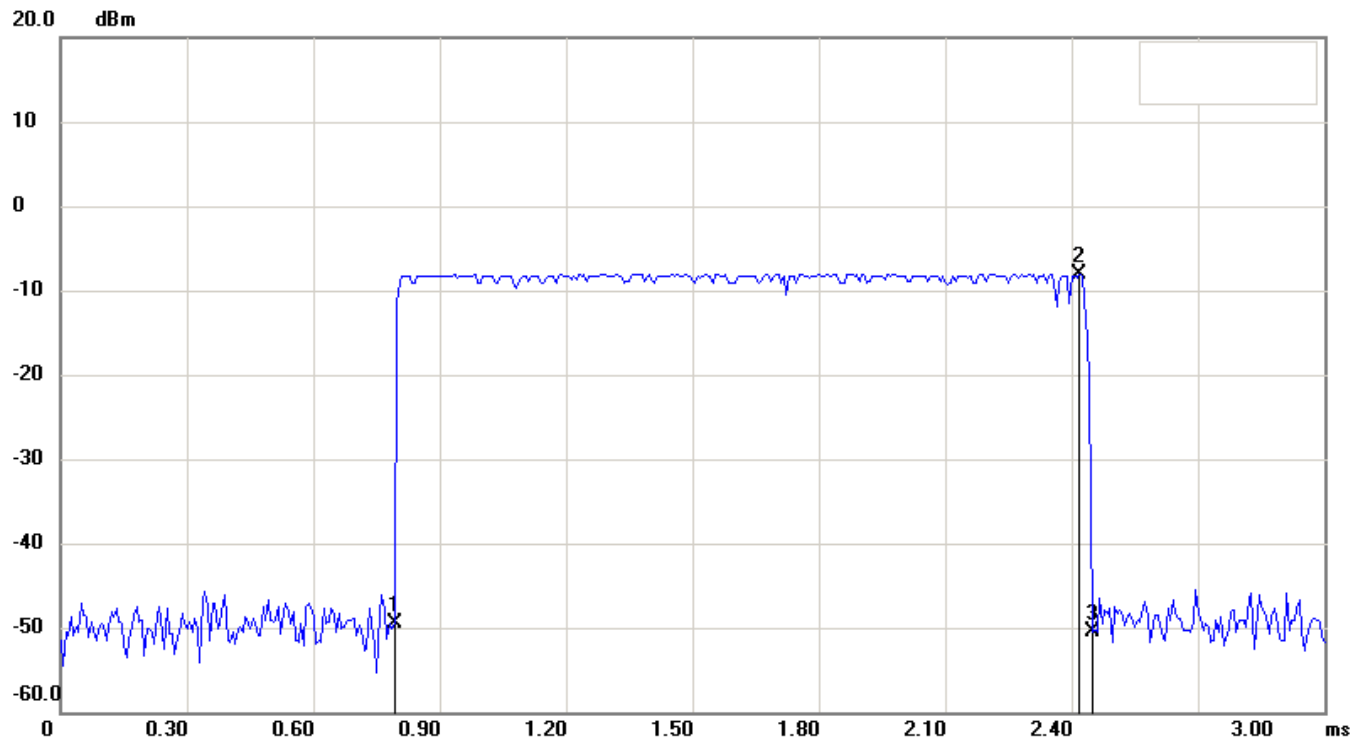

Condition: -28.08dBm
 EUT: Development Kit for PlayStation5
 Model: DFI-D1000AA
 Test Mode: BT
 Note: NCC_LP0002_DH3 pusle width

RF Conducted
 Sweep Time: 3ms Att.: 25dB
 RBW: 1000 KHz VBW: 1000 KHz
 Operator: Phillip

No.	Sweep time(ms)	Level(dBm)
1	0.7920	-49.59
2	2.4180	-8.08
3	2.4480	-50.49

No.		Δ Time(ms)	Δ Level(dB)
1	mk3-mk1	1.656	-0.9

8.4.3.2.3 DH5 Mode

週期之計算: $79(\text{頻道數}) \times 0.4 = 31.6 \text{ 秒}$

週期內跳頻次數之計算：

本系統每秒跳頻 1600 次，故每次跳頻時間為 $1 / 1600 = 0.625\text{ms}$ 。而每個 package 需要 5 次發射及 1 次接收，故每秒於 79 個頻道中只發射 266.7 次，平均每秒每個頻道之發射次數為 $266.7 / 79 = 3.38 \text{ 次}$ 。故於週期(31.6 秒)內每個頻道發射次數為 $3.38 \times 31.6 = 106.81 \text{ 次}$ 。

31.6秒內之最長佔用時間為 $2.910 \text{ ms} \times 106.81 \text{ 次} = 310.8 \text{ ms}$ 。

計算結果：佔用之平均時間少於0.4秒，合乎標準規定。

註：繪圖資料請參考第106頁。

8.5 結果判定

以上跳頻頻道之作用時間皆少於 0.4 秒，合乎標準規定。

DH5 Mode


File: 20-10-MAS-019_BT2
 Site: RF-Cond01

#19

Date: 2020/10/8

Temperature: 24 °C

Humidity: 53 %

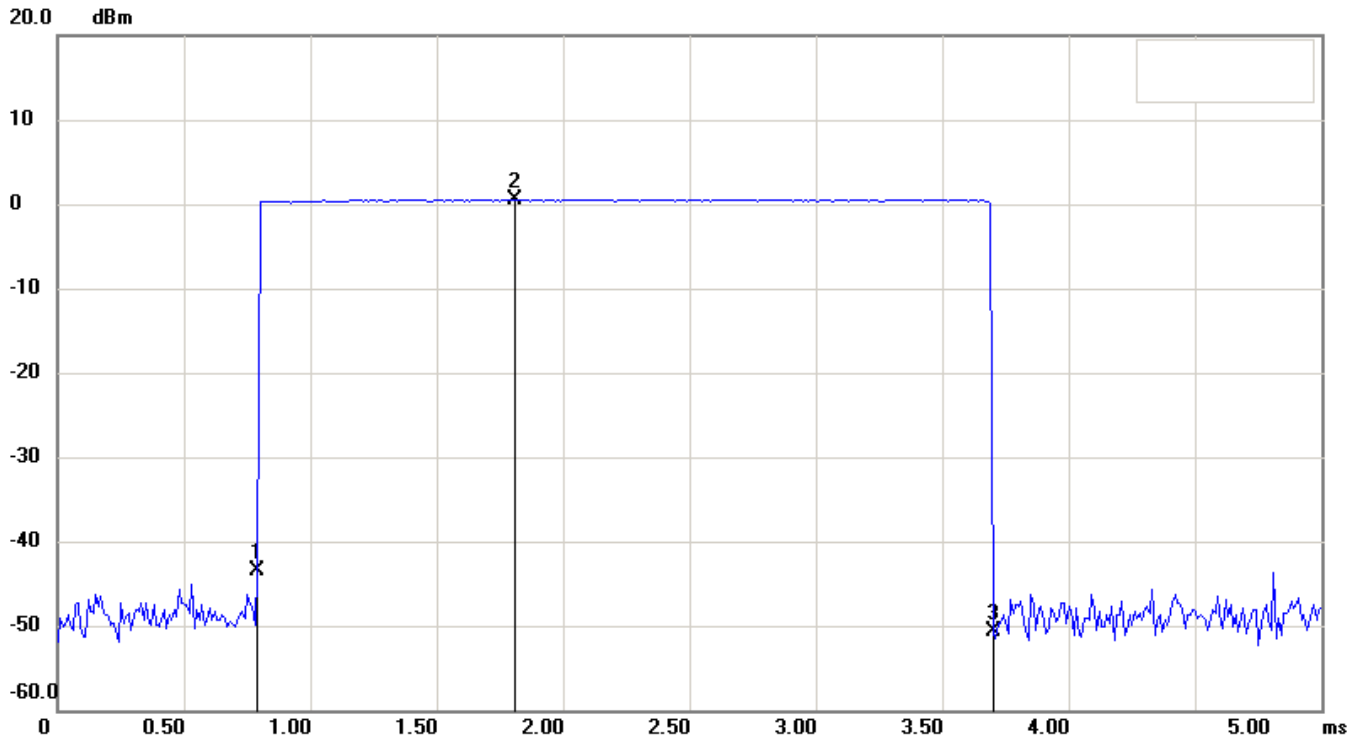

Condition: -19.56dBm
 EUT: Development Kit for PlayStation5
 Model: DFI-D1000AA
 Test Mode: BT
 Note: NCC_LP0002_DH5 pulse width

RF Conducted
 Sweep Time: 5ms Att.: 25dB
 RBW: 1000 KHz VBW: 1000 KHz
 Operator: Phillip

No.	Sweep time(ms)	Level(dBm)
1	0.7900	-43.46
2	1.8100	0.44
3	3.7000	-50.68

No.		Δ Time(ms)	Δ Level(dB)
1	mk3-mk1	2.91	-7.22

9 場強輻射之量測

9.1 適用標準

依據國家通訊傳播委員會低功率射頻器材技術規範4.10.1.5節之要求，落於第3.5節禁用頻段之輻射發射，應符合3.6節之一般限制要求。

9.2 量測方法

將待測物置於非金屬桌面，使其在工作狀態，接收天線置於3米外。待測物分別要垂直或水平放置，而且桌面要360度旋轉，另外接收天線也要從1米至4米升降變化，以找出最大的輻射電場強度，接收天線置於水平、垂直極向各執行測試一次。待測物若為手持式則分別要以三軸相放置，並分別測試以找出最大輻射電場強度。

9.3 量測場強輻射之儀器

儀器名稱	製造者	型號
EMI Receiver	R&S	ESCI
Spectrum Analyzer	R&S	FSU46
Horn Antenna	EMCO	3117
Horn Antenna	EMCO	3116
PRE-Amplifier	Agilent	8449B
PRE-Amplifier	Agilent	8447D
BiLog Antenna	ETC	MCTD 2786
Spectrum Analyzer	R&S	FSV

測試軟體: LZ-RF (Ver. ETC-3A2)

9.4 場強度之計算

場強之計算公式如下

$$\text{結果值} = \text{讀值} + \text{校正因子}$$

其中校正因子為：

天線因子+ 饋線損失+ 濾波器損失（若有使用）- 放大器增益（若有使用）
量測結果請見下頁。

9.5 場強輻射之量測結果

測試工程師:羅世勇

9.5.1 諧波發射量測值

9.5.1.1 BT_Module1

A. Channel Low

操作模式 : 發射接收

基本波頻率 : 2402 MHz

測試日期: Nov. 05, 2020

環境溫度: 23°C

環境濕度: 50%

輻射 頻率 (MHz)	天線 極性 H/V	機器讀值 (dBuV/m)@3m		校正 因子 (dB)	結果值 (dBuV/m)@3m		限制值 (dBuV/m)@3m		餘裕值 (dB) (worse)
		Peak	AVG		Peak	AVG	Peak	AVG	
4804.0000	H	---	---	1.02	---	---	74.0	54.0	---
4804.0000	V	---	---	1.02	---	---	74.0	54.0	---
7206.0000	H	---	---	3.64	---	---	74.0	54.0	---
7206.0000	V	---	---	3.64	---	---	74.0	54.0	---
9608.0000	H	---	---	4.64	---	---	74.0	54.0	---
9608.0000	V	---	---	4.64	---	---	74.0	54.0	---
14412.0000	H	---	---	10.58	---	---	74.0	54.0	---
14412.0000	V	---	---	10.58	---	---	74.0	54.0	---

註：1. 標記“---”表發射之訊號太弱而儀器無法量測。

2. 若以峰值檢測功能測量之值符合平均值限制值，則可視同以平均值功能測量之值亦符合平均值限制值。

3. 量測不準確度: $\pm 4.1\text{dB}(1\text{GHz} \leq f < 18\text{GHz})$
 $\pm 4.4\text{dB}(18\text{GHz} \leq f \leq 40\text{GHz})$

B. Channel Mid

操作模式 : 發射接收

基本波頻率 : 2441 MHz

測試日期: Nov. 05, 2020

環境溫度: 23°C

環境濕度: 50%

輻射 頻率	天線 極性	機器讀值 (dBuV/m)@3m		校正 因子	結果值 (dBuV/m)@3m		限制值 (dBuV/m)@3m		餘裕值 (worse)
		Peak	AVG		Peak	AVG	Peak	AVG	
(MHz)	H/V			(dB)					(dB)
4882.0000	H	---	---	1.18	---	---	74.0	54.0	---
4882.0000	V	---	---	1.18	---	---	74.0	54.0	---
7323.0000	H	---	---	3.67	---	---	74.0	54.0	---
7323.0000	V	---	---	3.67	---	---	74.0	54.0	---
9764.0000	H	---	---	4.83	---	---	74.0	54.0	---
9764.0000	V	---	---	4.83	---	---	74.0	54.0	---
12205.0000	H	---	---	8.33	---	---	74.0	54.0	---
12205.0000	V	---	---	8.33	---	---	74.0	54.0	---

註：1. 標記“---”表發射之訊號太弱而儀器無法量測。

2. 若以峰值檢測功能測量之值符合平均值限制值，則可視同以平均值功能測量之值亦符合平均值限制值。

3. 量測不準確度: $\pm 4.1\text{dB}(1\text{GHz} \leq f < 18\text{GHz})$
 $\pm 4.4\text{dB}(18\text{GHz} \leq f \leq 40\text{GHz})$

C. Channel High

操作模式 : 發射接收

基本波頻率 : 2480 MHz

測試日期: Nov. 05, 2020

環境溫度: 23°C

環境濕度: 50%

輻射 頻率 (MHz)	天線 極性 H/V	機器讀值 (dBuV/m)@3m		校正 因子 (dB)	結果值 (dBuV/m)@3m		限制值 (dBuV/m)@3m		餘裕值 (worse) (dB)
		Peak	AVG		Peak	AVG	Peak	AVG	
4960.0000	H	---	---	1.36	---	---	74.0	54.0	---
4960.0000	V	---	---	1.36	---	---	74.0	54.0	---
7440.0000	H	---	---	3.70	---	---	74.0	54.0	---
7440.0000	V	---	---	3.70	---	---	74.0	54.0	---
9920.0000	H	---	---	5.03	---	---	74.0	54.0	---
9920.0000	V	---	---	5.03	---	---	74.0	54.0	---
17360.0000	H	---	---	13.52	---	---	74.0	54.0	---
17360.0000	V	---	---	13.52	---	---	74.0	54.0	---

註：1. 標記“---”表發射之訊號太弱而儀器無法量測。

2. 若以峰值檢測功能測量之值符合平均值限制值，則可視同以平均值功能測量之值亦符合平均值限制值。

3. 量測不準確度: $\pm 4.1\text{dB}(1\text{GHz} \leq f < 18\text{GHz})$
 $\pm 4.4\text{dB}(18\text{GHz} \leq f \leq 40\text{GHz})$

9.5.1.2 BT_Module2

A. Channel Low

操作模式 : 發射接收

基本波頻率 : 2402 MHz

測試日期: Nov. 05, 2020

環境溫度: 23°C

環境濕度: 50%

輻射 頻率	天線 極性	機器讀值 (dBuV/m)@3m		校正 因子	結果值 (dBuV/m)@3m		限制值 (dBuV/m)@3m		餘裕值 (worse)
(MHz)	H/V	Peak	AVG	(dB)	Peak	AVG	Peak	AVG	(dB)
4804.0000	H	---	---	1.02	---	---	74.0	54.0	---
4804.0000	V	---	---	1.02	---	---	74.0	54.0	---
7206.0000	H	---	---	3.64	---	---	74.0	54.0	---
7206.0000	V	---	---	3.64	---	---	74.0	54.0	---
9608.0000	H	---	---	4.64	---	---	74.0	54.0	---
9608.0000	V	---	---	4.64	---	---	74.0	54.0	---
14412.0000	H	---	---	10.58	---	---	74.0	54.0	---
14412.0000	V	---	---	10.58	---	---	74.0	54.0	---

註：1. 標記“---”表發射之訊號太弱而儀器無法量測。

2. 若以峰值檢測功能測量之值符合平均值限制值，則可視同以平均值功能測量之值亦符合平均值限制值。

3. 量測不準確度: $\pm 4.1\text{dB}(1\text{GHz} \leq f < 18\text{GHz})$
 $\pm 4.4\text{dB}(18\text{GHz} \leq f \leq 40\text{GHz})$

B. Channel Mid

操作模式 : 發射接收

基本波頻率 : 2441 MHz

測試日期: Nov. 05, 2020

環境溫度: 23°C

環境濕度: 50%

輻射 頻率	天線 極性	機器讀值 (dBuV/m)@3m		校正 因子	結果值 (dBuV/m)@3m		限制值 (dBuV/m)@3m		餘裕值 (worse)
		Peak	AVG		Peak	AVG	Peak	AVG	
(MHz)	H/V			(dB)					(dB)
4882.0000	H	---	---	1.18	---	---	74.0	54.0	---
4882.0000	V	---	---	1.18	---	---	74.0	54.0	---
7323.0000	H	---	---	3.67	---	---	74.0	54.0	---
7323.0000	V	---	---	3.67	---	---	74.0	54.0	---
9764.0000	H	---	---	4.83	---	---	74.0	54.0	---
9764.0000	V	---	---	4.83	---	---	74.0	54.0	---
12205.0000	H	---	---	8.33	---	---	74.0	54.0	---
12205.0000	V	---	---	8.33	---	---	74.0	54.0	---

註：1. 標記“---”表發射之訊號太弱而儀器無法量測。

2. 若以峰值檢測功能測量之值符合平均值限制值，則可視同以平均值功能測量之值亦符合平均值限制值。

3. 量測不準確度: $\pm 4.1\text{dB}(1\text{GHz} \leq f < 18\text{GHz})$
 $\pm 4.4\text{dB}(18\text{GHz} \leq f \leq 40\text{GHz})$

C. Channel High

操作模式 : 發射接收

基本波頻率 : 2480 MHz

測試日期: Nov. 05, 2020

環境溫度: 23°C

環境濕度: 50%

輻射 頻率 (MHz)	天線 極性 H/V	機器讀值 (dBuV/m)@3m		校正 因子 (dB)	結果值 (dBuV/m)@3m		限制值 (dBuV/m)@3m		餘裕值 (worse) (dB)
		Peak	AVG		Peak	AVG	Peak	AVG	
4960.0000	H	---	---	1.36	---	---	74.0	54.0	---
4960.0000	V	---	---	1.36	---	---	74.0	54.0	---
7440.0000	H	---	---	3.70	---	---	74.0	54.0	---
7440.0000	V	---	---	3.70	---	---	74.0	54.0	---
9920.0000	H	---	---	5.03	---	---	74.0	54.0	---
9920.0000	V	---	---	5.03	---	---	74.0	54.0	---
17360.0000	H	---	---	13.52	---	---	74.0	54.0	---
17360.0000	V	---	---	13.52	---	---	74.0	54.0	---

註：1. 標記“---”表發射之訊號太弱而儀器無法量測。

2. 若以峰值檢測功能測量之值符合平均值限制值，則可視同以平均值功能測量之值亦符合平均值限制值。

3. 量測不準確度: $\pm 4.1\text{dB}$ ($1\text{GHz} \leq f < 18\text{GHz}$)
 $\pm 4.4\text{dB}$ ($18\text{GHz} \leq f \leq 40\text{GHz}$)


9.5.2 諧波及其它不必要之訊號測試圖

9.5.2.1 BT_Module1

A. Channel Low

操作模式 : 發射接收
基本波頻率 : 2402 MHz

File: 20-10-MAS-019_EDR_BT1 #31 Date: 2020/11/5 Temperature: 23 °C
Site: RE02-EMC B1- N2 Humidity: 50 %

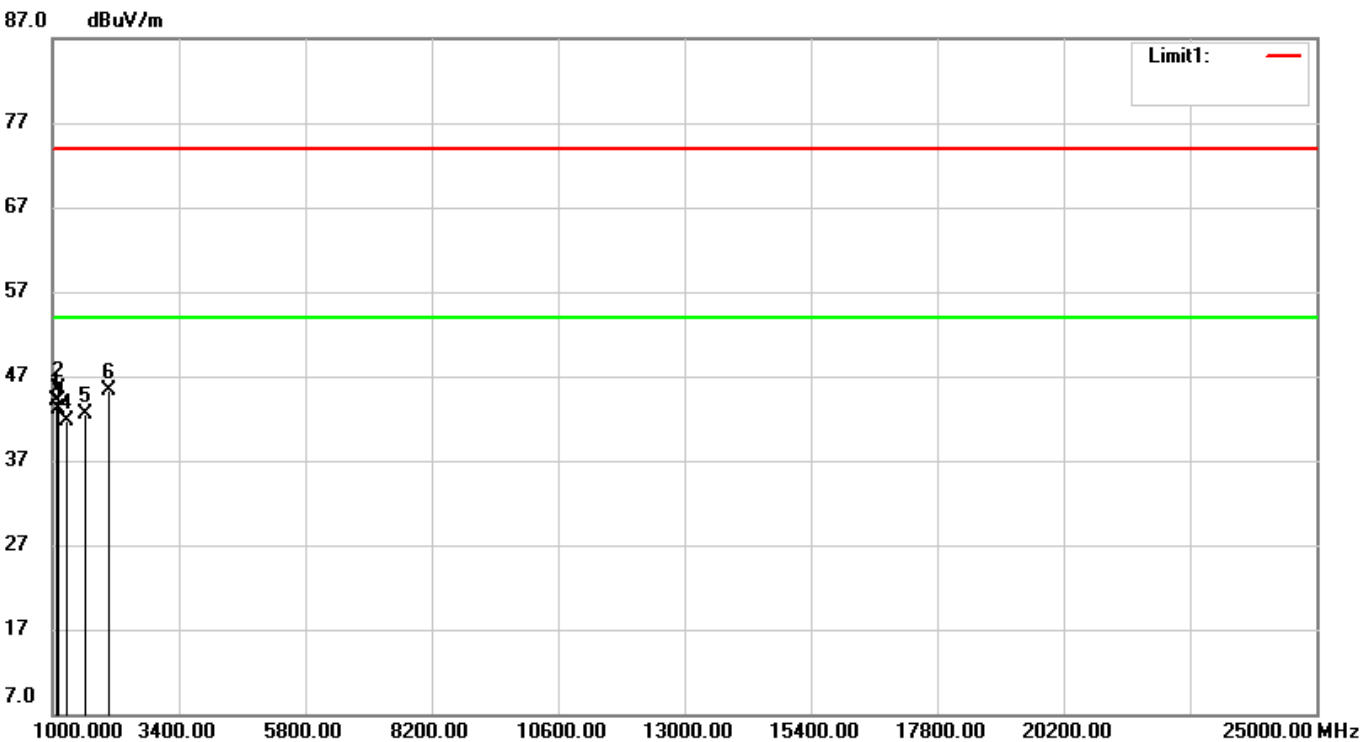


Condition: NCC_Above1G_Pk Polarization: Horizontal
EUT: Development Kit for PlayStation5 Distance: 3m
Model: DFI-D1000AA
Test Mode: BT1 Operator: Phillip
Note: CH LOW-1

No.	Frequency (MHz)	Reading (dBuV/m)	Detector	Corrected dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
1	1071.79470	53.46	peak	-9.29	44.17	74.00	-29.83
2	1085.25640	54.74	peak	-9.25	45.49	74.00	-28.51
3	1114.42300	52.23	peak	-9.17	43.06	74.00	-30.94
4	1269.23070	50.57	peak	-8.77	41.80	74.00	-32.20
5	1599.03840	49.76	peak	-7.30	42.46	74.00	-31.54
6	2043.26920	48.94	peak	-3.61	45.33	74.00	-28.67

註: 1. 若以峰值檢測功能測量之值符合平均值限制值，則可視同以平均值功能測量之值亦符合平均值限制值。
2. 量測不準確度: $\pm 4.1\text{dB}(1\text{GHz} \leq f < 18\text{GHz})$
 $\pm 4.4\text{dB}(18\text{GHz} \leq f \leq 40\text{GHz})$

操作模式 : 發射接收
基本波頻率 : 2402 MHz

File: 20-10-MAS-019_EDR_BT1 #32 Date: 2020/11/5 Temperature: 23 °C
Site: RE02-EMC B1- N2 Humidity: 50 %

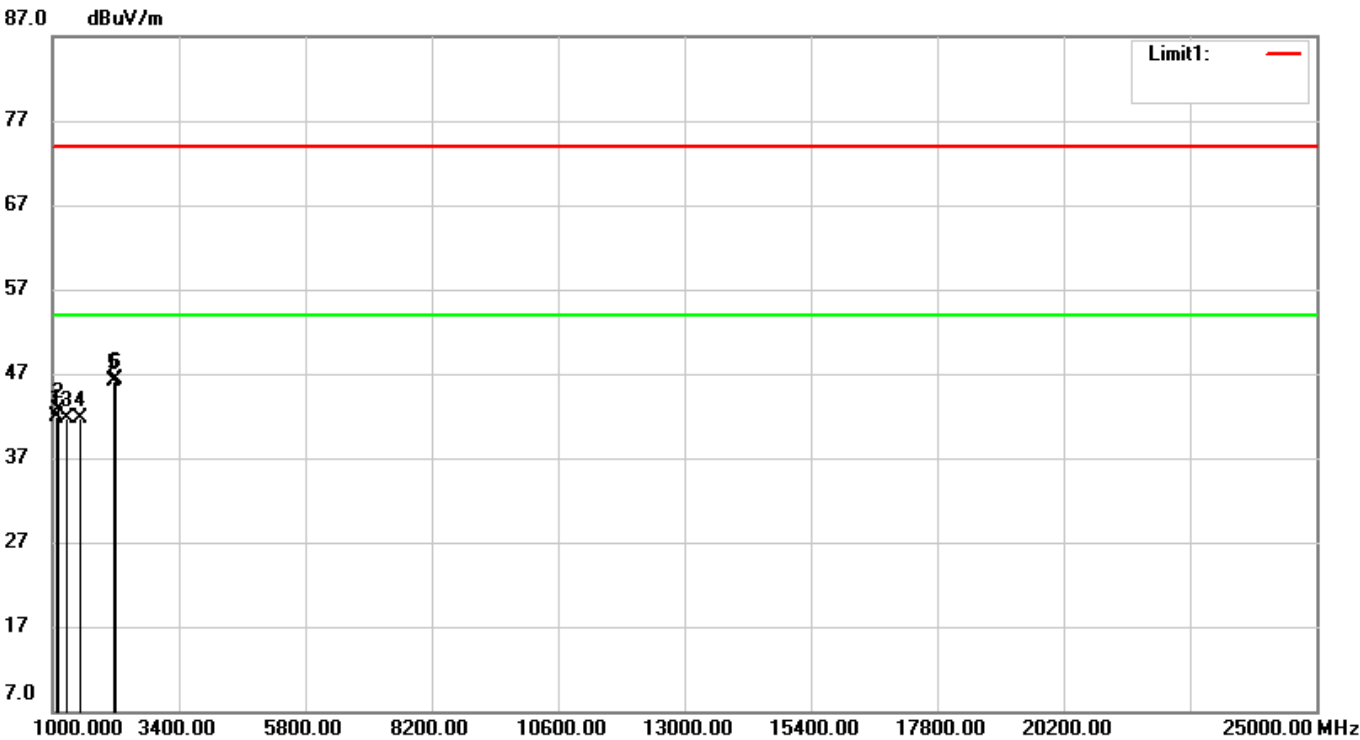

Condition: NCC_Above1G_Pk Polarization: Vertical
EUT: Development Kit for PlayStation5 Distance: 3m
Model: DFI-D1000AA
Test Mode: BT1 Operator: Phillip
Note: CH LOW-1

No.	Frequency (MHz)	Reading (dBuV/m)	Detector	Corrected dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
1	1067.30760	51.21	peak	-9.29	41.92	74.00	-32.08
2	1085.25640	52.01	peak	-9.25	42.76	74.00	-31.24
3	1253.52560	50.62	peak	-8.82	41.80	74.00	-32.20
4	1500.32050	49.82	peak	-8.18	41.64	74.00	-32.36
5	2146.47430	49.39	peak	-3.35	46.04	74.00	-27.96
6	2184.61530	49.54	peak	-3.25	46.29	74.00	-27.71

註: 1. 若以峰值檢測功能測量之值符合平均值限制值，則可視同以平均值功能測量之值亦符合平均值限制值。
2. 量測不準確度: $\pm 4.1\text{dB}(1\text{GHz} \leq f < 18\text{GHz})$
 $\pm 4.4\text{dB}(18\text{GHz} \leq f \leq 40\text{GHz})$

B. Channel Mid

操作模式 : 發射接收
基本波頻率 : 2441 MHz


File: 20-10-MAS-019_EDR_BT1
Site: RE02-EMC B1- N2

#33

Date: 2020/11/5

Temperature: 23 °C

Humidity: 50 %

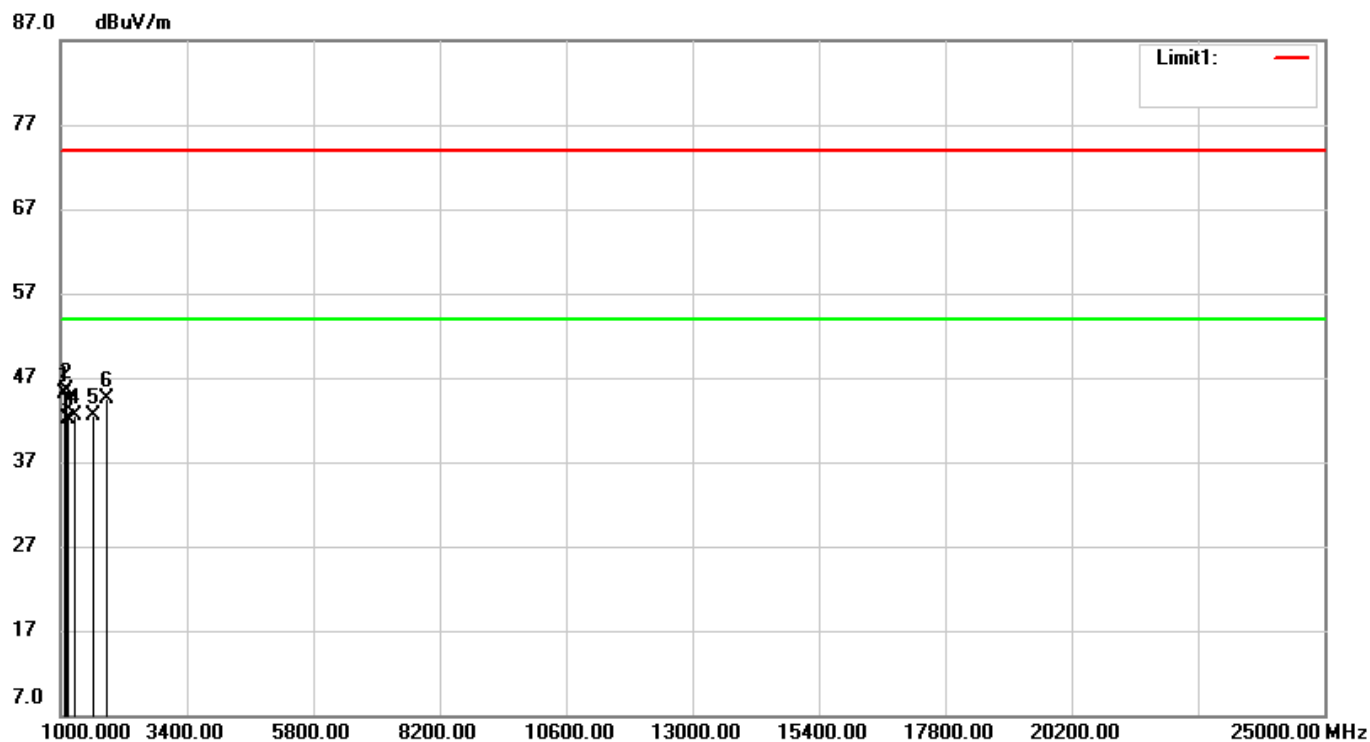

Condition: NCC_Above1G_Pk
EUT: Development Kit for PlayStation5
Model: DFI-D1000AA
Test Mode: BT1
Note: CH MID-1

Polarization: Horizontal
Distance: 3m
Operator: Phillip


No.	Frequency (MHz)	Reading (dBuV/m)	Detector	Corrected dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
1	1058.33330	54.40	peak	-9.32	45.08	74.00	-28.92
2	1085.25640	54.67	peak	-9.25	45.42	74.00	-28.58
3	1143.58970	51.26	peak	-9.10	42.16	74.00	-31.84
4	1264.74350	51.22	peak	-8.79	42.43	74.00	-31.57
5	1601.28200	49.81	peak	-7.28	42.53	74.00	-31.47
6	1883.97430	49.26	peak	-4.76	44.50	74.00	-29.50

註: 1. 若以峰值檢測功能測量之值符合平均值限制值，則可視同以平均值功能測量之值亦符合平均值限制值。

2. 量測不準確度: $\pm 4.1\text{dB}$ ($1\text{GHz} \leq f < 18\text{GHz}$)
 $\pm 4.4\text{dB}$ ($18\text{GHz} \leq f \leq 40\text{GHz}$)

操作模式 : 發射接收
基本波頻率 : 2441 MHz

File: 20-10-MAS-019_EDR_BT1 #34 Date: 2020/11/5 Temperature: 23 °C
Site: RE02-EMC B1- N2 Humidity: 50 %

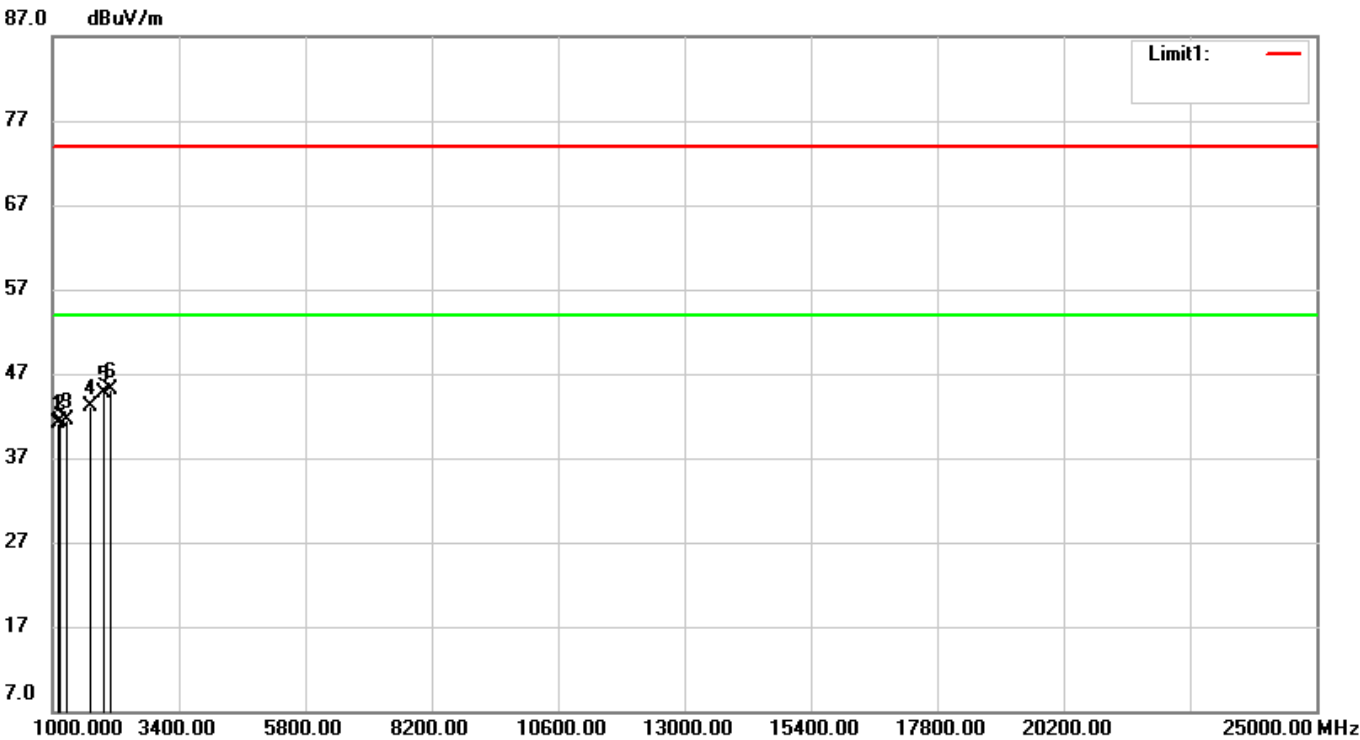

Condition: NCC_Above1G_Pk Polarization: Vertical
EUT: Development Kit for PlayStation5 Distance: 3m
Model: DFI-D1000AA
Test Mode: BT1 Operator: Phillip
Note: CH MID-1

No.	Frequency (MHz)	Reading (dBuV/m)	Detector	Corrected dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
1	1091.98710	50.40	peak	-9.23	41.17	74.00	-32.83
2	1118.91020	50.41	peak	-9.16	41.25	74.00	-32.75
3	1264.74350	50.29	peak	-8.79	41.50	74.00	-32.50
4	1706.73070	49.38	peak	-6.34	43.04	74.00	-30.96
5	1946.79480	49.00	peak	-4.20	44.80	74.00	-29.20
6	2092.62820	48.68	peak	-3.48	45.20	74.00	-28.80

註: 1. 若以峰值檢測功能測量之值符合平均值限制值，則可視同以平均值功能測量之值亦符合平均值限制值。
2. 量測不準確度: $\pm 4.1\text{dB}(1\text{GHz} \leq f < 18\text{GHz})$
 $\pm 4.4\text{dB}(18\text{GHz} \leq f \leq 40\text{GHz})$

C. Channel High

操作模式 : 發射接收
基本波頻率 : 2480 MHz


File: 20-10-MAS-019_EDR_BT1
Site: RE02-EMC B1- N2

#35

Date: 2020/11/5

Temperature: 23 °C

Humidity: 50 %

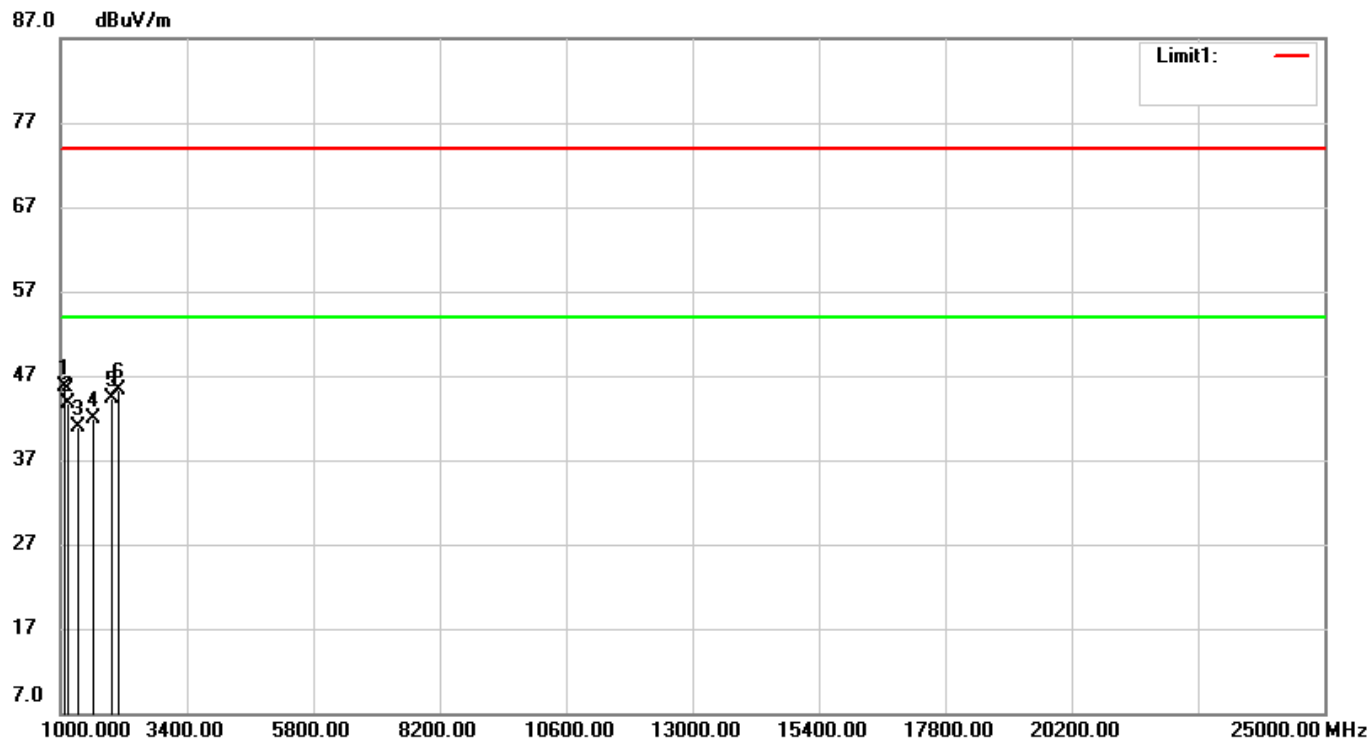

Condition: NCC_Above1G_Pk
EUT: Development Kit for PlayStation5
Model: DFI-D1000AA
Test Mode: BT1
Note: CH HIGH-1

Polarization: Horizontal
Distance: 3m
Operator: Phillip

No.	Frequency (MHz)	Reading (dBuV/m)	Detector	Corrected dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
1	1074.03840	54.93	peak	-9.28	45.65	74.00	-28.35
2	1118.91020	52.87	peak	-9.16	43.71	74.00	-30.29
3	1345.51280	49.48	peak	-8.58	40.90	74.00	-33.10
4	1601.28200	49.21	peak	-7.28	41.93	74.00	-32.07
5	1953.52560	48.48	peak	-4.14	44.34	74.00	-29.66
6	2081.41010	48.92	peak	-3.52	45.40	74.00	-28.60

註: 1. 若以峰值檢測功能測量之值符合平均值限制值，則可視同以平均值功能測量之值亦符合平均值限制值。

2. 量測不準確度: $\pm 4.1\text{dB}$ ($1\text{GHz} \leq f < 18\text{GHz}$)
 $\pm 4.4\text{dB}$ ($18\text{GHz} \leq f \leq 40\text{GHz}$)

操作模式 : 發射接收
基本波頻率 : 2480 MHz


File: 20-10-MAS-019_EDR_BT1
Site: RE02-EMC B1- N2

#36

Date: 2020/11/5

Temperature: 23 °C

Humidity: 50 %

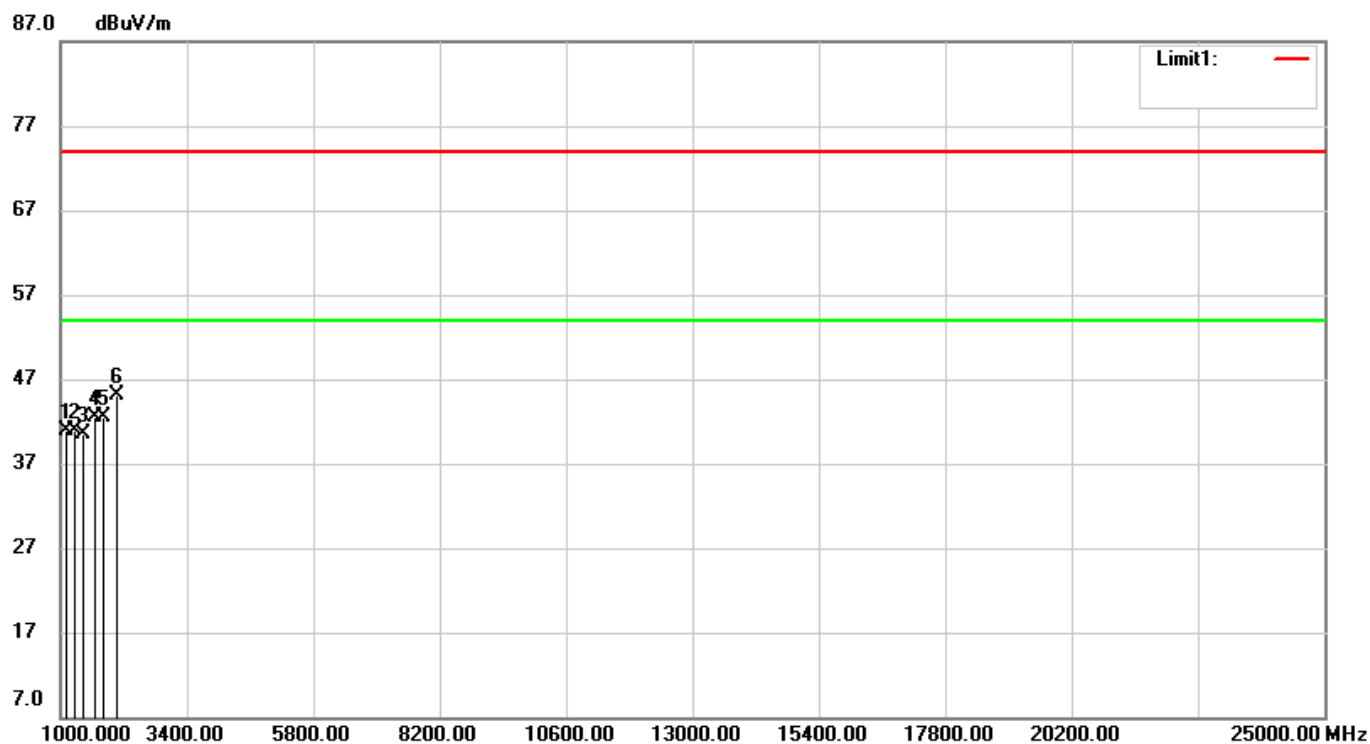

Condition: NCC_Above1G_Pk
EUT: Development Kit for PlayStation5
Model: DFI-D1000AA
Test Mode: BT1
Note: CH HIGH-1

Polarization: Vertical
Distance: 3m
Operator: Phillip

No.	Frequency (MHz)	Reading (dBuV/m)	Detector	Corrected dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
1	1085.25640	50.10	peak	-9.25	40.85	74.00	-33.15
2	1266.98710	49.78	peak	-8.79	40.99	74.00	-33.01
3	1417.30760	48.98	peak	-8.39	40.59	74.00	-33.41
4	1634.93580	49.42	peak	-6.98	42.44	74.00	-31.56
5	1778.52560	48.16	peak	-5.70	42.46	74.00	-31.54
6	2067.94870	48.61	peak	-3.56	45.05	74.00	-28.95

註: 1. 若以峰值檢測功能測量之值符合平均值限制值，則可視同以平均值功能測量之值亦符合平均值限制值。

2. 量測不準確度: $\pm 4.1\text{dB}$ ($1\text{GHz} \leq f < 18\text{GHz}$)
 $\pm 4.4\text{dB}$ ($18\text{GHz} \leq f \leq 40\text{GHz}$)

9.5.2.2 BT_Module2

A. Channel Low

操作模式 : 發射接收
基本波頻率 : 2402 MHz


File: 20-10-MAS-019_EDR_BT2
Site: RE02-EMC B1- N2

#34

Date: 2020/11/5

Temperature: 23 °C

Humidity: 50 %

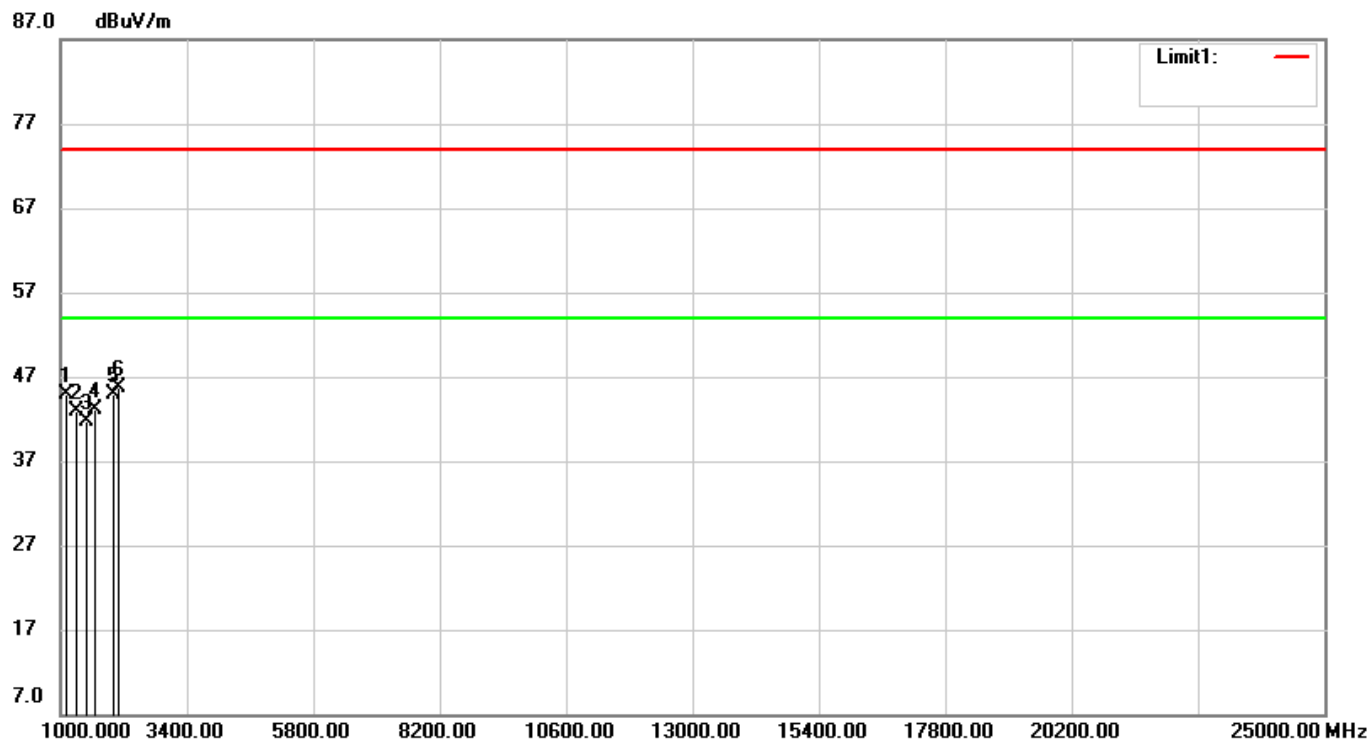

Condition: NCC_Above1G_Pk
EUT: Development Kit for PlayStation5
Model: DFI-D1000AA
Test Mode: BT2
Note: CH LOW-1

Polarization: Horizontal
Distance: 3m
Operator: Phillip


No.	Frequency (MHz)	Reading (dBuV/m)	Detector	Corrected dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
1	1085.25640	54.25	peak	-9.25	45.00	74.00	-29.00
2	1273.71800	51.67	peak	-8.76	42.91	74.00	-31.09
3	1495.83330	49.97	peak	-8.19	41.78	74.00	-32.22
4	1637.17940	50.07	peak	-6.96	43.11	74.00	-30.89
5	1973.71800	48.96	peak	-3.96	45.00	74.00	-29.00
6	2079.16660	49.29	peak	-3.53	45.76	74.00	-28.24

註: 1. 若以峰值檢測功能測量之值符合平均值限制值，則可視同以平均值功能測量之值亦符合平均值限制值。

2. 量測不準確度: $\pm 4.1\text{dB}$ ($1\text{GHz} \leq f < 18\text{GHz}$)
 $\pm 4.4\text{dB}$ ($18\text{GHz} \leq f \leq 40\text{GHz}$)

操作模式 : 發射接收
基本波頻率 : 2402 MHz

File: 20-10-MAS-019_EDR_BT2 #35 Date: 2020/11/5 Temperature: 23 °C
Site: RE02-EMC B1- N2 Humidity: 50 %

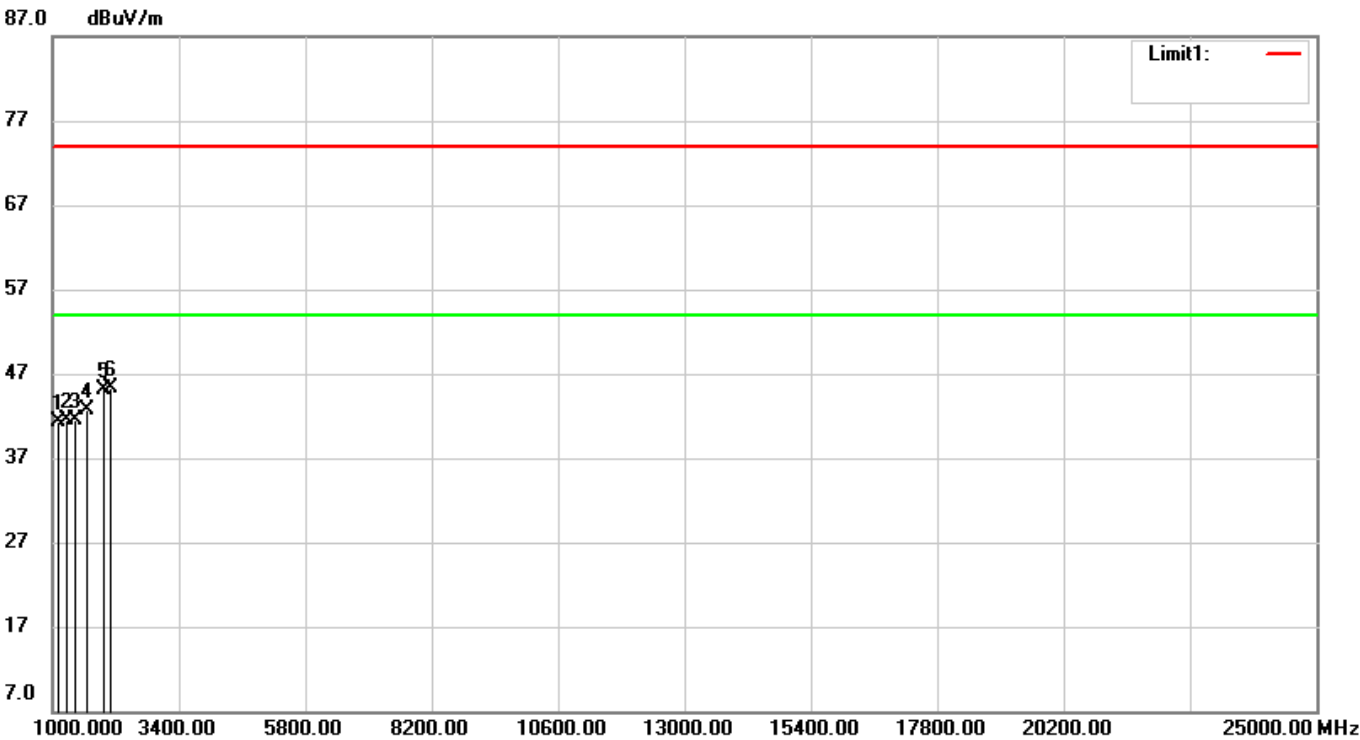

Condition: NCC_Above1G_Pk Polarization: Vertical
EUT: Development Kit for PlayStation5 Distance: 3m
Model: DFI-D1000AA
Test Mode: BT2 Operator: Phillip
Note: CH LOW-1

No.	Frequency (MHz)	Reading (dBuV/m)	Detector	Corrected dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
1	1114.42300	50.53	peak	-9.17	41.36	74.00	-32.64
2	1264.74350	50.22	peak	-8.79	41.43	74.00	-32.57
3	1421.79470	49.97	peak	-8.39	41.58	74.00	-32.42
4	1634.93580	49.67	peak	-6.98	42.69	74.00	-31.31
5	1953.52560	49.28	peak	-4.14	45.14	74.00	-28.86
6	2099.35900	48.75	peak	-3.47	45.28	74.00	-28.72

註: 1. 若以峰值檢測功能測量之值符合平均值限制值，則可視同以平均值功能測量之值亦符合平均值限制值。
2. 量測不準確度: $\pm 4.1\text{dB}(1\text{GHz} \leq f < 18\text{GHz})$
 $\pm 4.4\text{dB}(18\text{GHz} \leq f \leq 40\text{GHz})$

B. Channel Mid

操作模式 : 發射接收
基本波頻率 : 2441 MHz


File: 20-10-MAS-019_EDR_BT2
Site: RE02-EMC B1- N2

#36

Date: 2020/11/5

Temperature: 23 °C

Humidity: 50 %

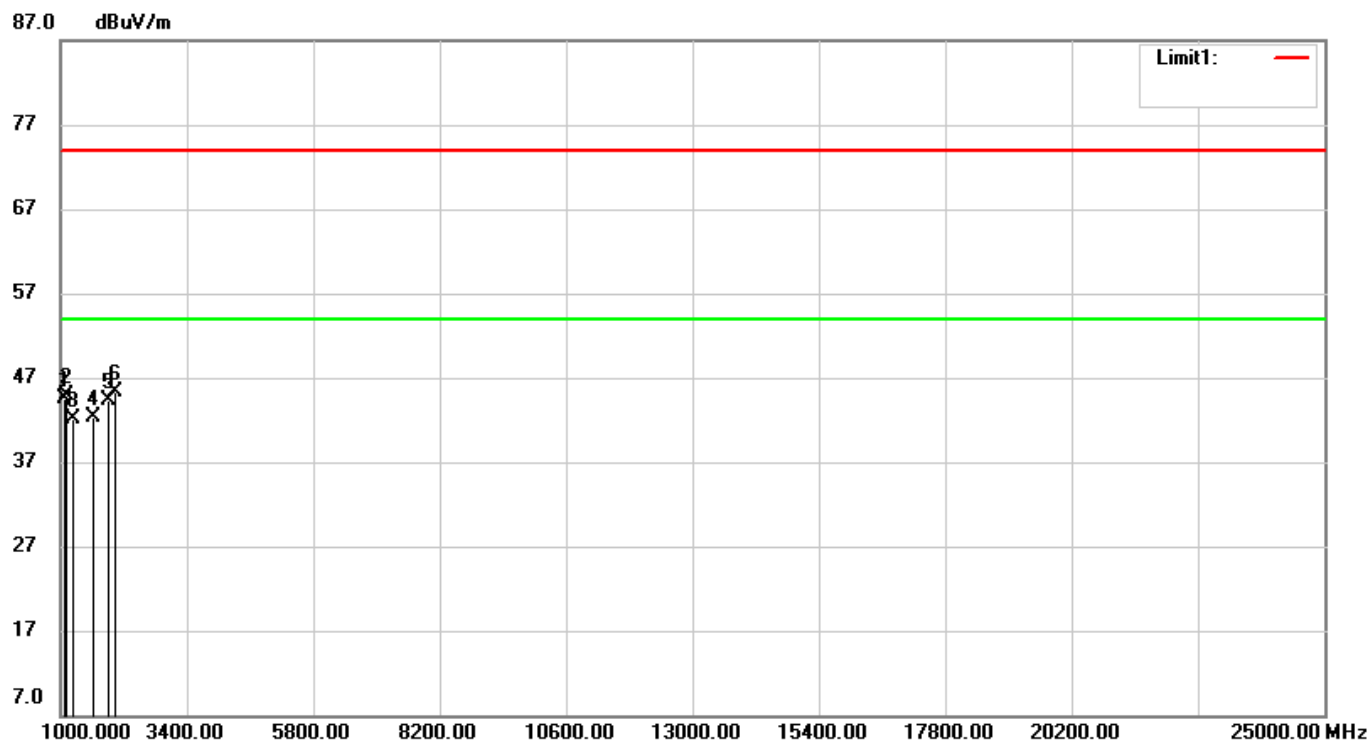

Condition: NCC_Above1G_Pk
EUT: Development Kit for PlayStation5
Model: DFI-D1000AA
Test Mode: BT2
Note: CH MID-1

Polarization: Horizontal
Distance: 3m
Operator: Phillip


No.	Frequency (MHz)	Reading (dBuV/m)	Detector	Corrected dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
1	1069.55120	53.89	peak	-9.29	44.60	74.00	-29.40
2	1085.25640	54.25	peak	-9.25	45.00	74.00	-29.00
3	1222.11530	51.08	peak	-8.89	42.19	74.00	-31.81
4	1601.28200	49.53	peak	-7.28	42.25	74.00	-31.75
5	1895.19230	48.91	peak	-4.66	44.25	74.00	-29.75
6	2023.07700	48.90	peak	-3.68	45.22	74.00	-28.78

註: 1. 若以峰值檢測功能測量之值符合平均值限制值，則可視同以平均值功能測量之值亦符合平均值限制值。

2. 量測不準確度: $\pm 4.1\text{dB}$ ($1\text{GHz} \leq f < 18\text{GHz}$)
 $\pm 4.4\text{dB}$ ($18\text{GHz} \leq f \leq 40\text{GHz}$)

操作模式 : 發射接收
基本波頻率 : 2441 MHz

File: 20-10-MAS-019_EDR_BT2 #37 Date: 2020/11/5 Temperature: 23 °C
Site: RE02-EMC B1- N2 Humidity: 50 %

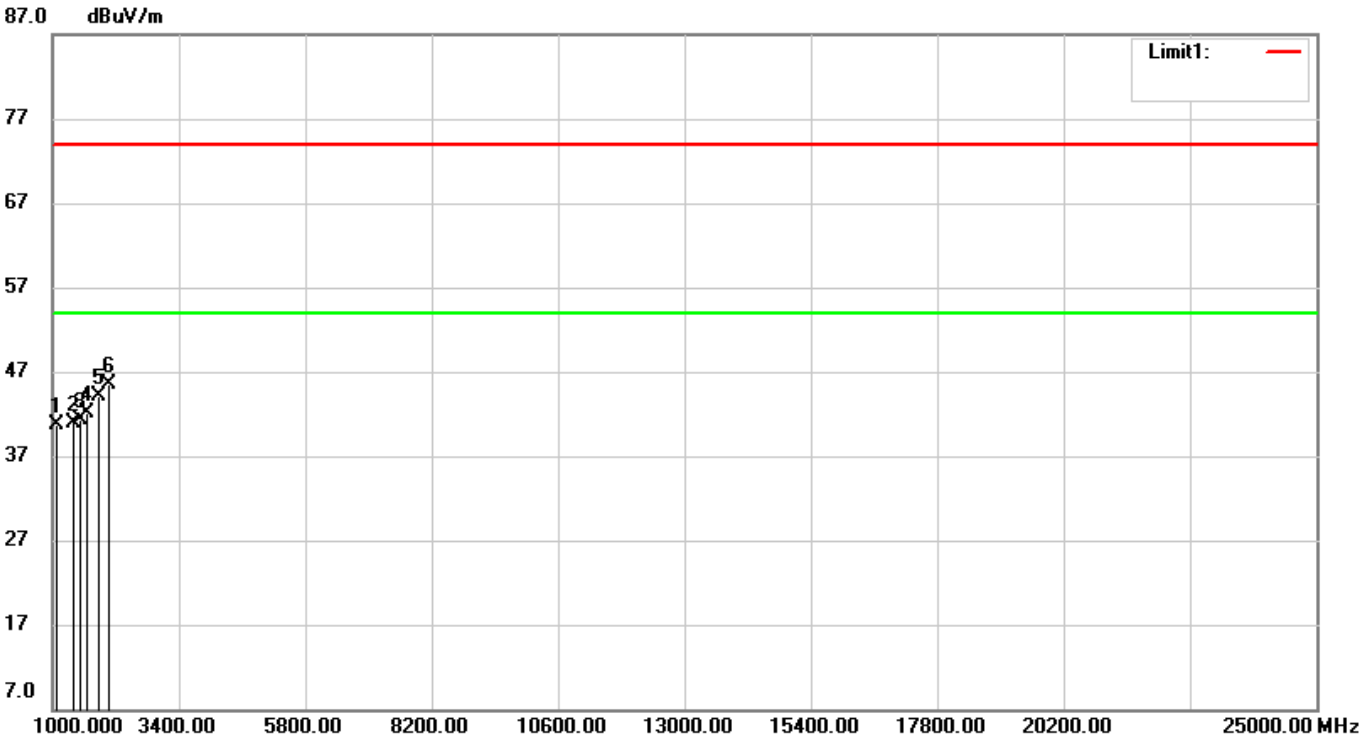

Condition: NCC_Above1G_Pk Polarization: Vertical
EUT: Development Kit for PlayStation5 Distance: 3m
Model: DFI-D1000AA
Test Mode: BT2 Operator: Phillip
Note: CH MID-1


No.	Frequency (MHz)	Reading (dBuV/m)	Detector	Corrected dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
1	1065.06410	50.02	peak	-9.31	40.71	74.00	-33.29
2	1350.00000	49.52	peak	-8.57	40.95	74.00	-33.05
3	1518.26920	49.29	peak	-8.01	41.28	74.00	-32.72
4	1619.23070	49.27	peak	-7.12	42.15	74.00	-31.85
5	1883.97430	48.79	peak	-4.76	44.03	74.00	-29.97
6	2041.02560	49.04	peak	-3.62	45.42	74.00	-28.58

註: 1. 若以峰值檢測功能測量之值符合平均值限制值，則可視同以平均值功能測量之值亦符合平均值限制值。
2. 量測不準確度: $\pm 4.1\text{dB}(1\text{GHz} \leq f < 18\text{GHz})$
 $\pm 4.4\text{dB}(18\text{GHz} \leq f \leq 40\text{GHz})$

C. Channel High

操作模式 : 發射接收
基本波頻率 : 2480 MHz

File: 20-10-MAS-019_EDR_BT2 #38 Date: 2020/11/5 Temperature: 23 °C
Site: RE02-EMC B1- N2 Humidity: 50 %

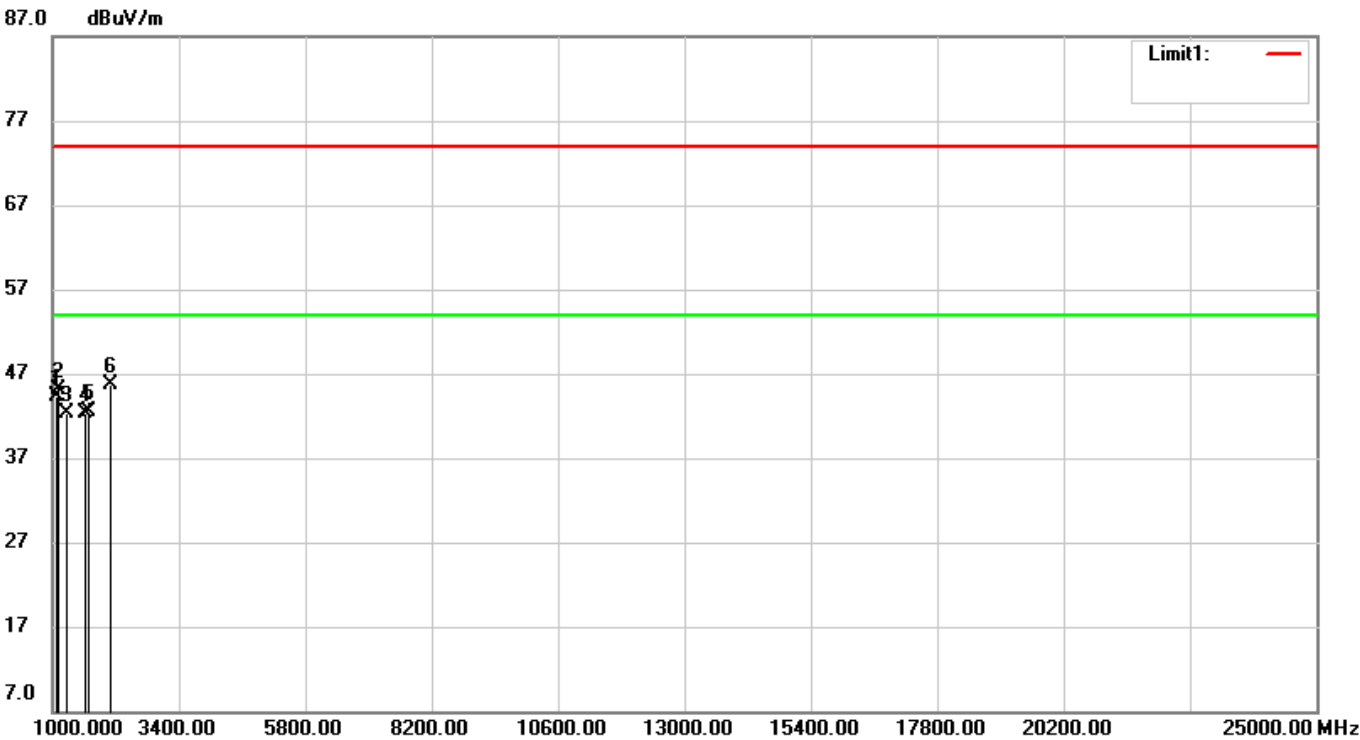

Condition: NCC_Above1G_Pk Polarization: Horizontal
EUT: Development Kit for PlayStation5 Distance: 3m
Model: DFI-D1000AA
Test Mode: BT2 Operator: Phillip
Note: CH HIGH-1

No.	Frequency (MHz)	Reading (dBuV/m)	Detector	Corrected dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
1	1062.82050	53.66	peak	-9.31	44.35	74.00	-29.65
2	1085.25640	54.30	peak	-9.25	45.05	74.00	-28.95
3	1253.52560	51.06	peak	-8.82	42.24	74.00	-31.76
4	1599.03840	49.61	peak	-7.30	42.31	74.00	-31.69
5	1679.80760	49.01	peak	-6.58	42.43	74.00	-31.57
6	2083.65380	49.15	peak	-3.51	45.64	74.00	-28.36

註: 1. 若以峰值檢測功能測量之值符合平均值限制值，則可視同以平均值功能測量之值亦符合平均值限制值。
2. 量測不準確度: $\pm 4.1\text{dB}(1\text{GHz} \leq f < 18\text{GHz})$
 $\pm 4.4\text{dB}(18\text{GHz} \leq f \leq 40\text{GHz})$

操作模式 : 發射接收
基本波頻率 : 2480 MHz


File: 20-10-MAS-019_EDR_BT2
Site: RE02-EMC B1- N2

#39

Date: 2020/11/5

Temperature: 23 °C

Humidity: 50 %

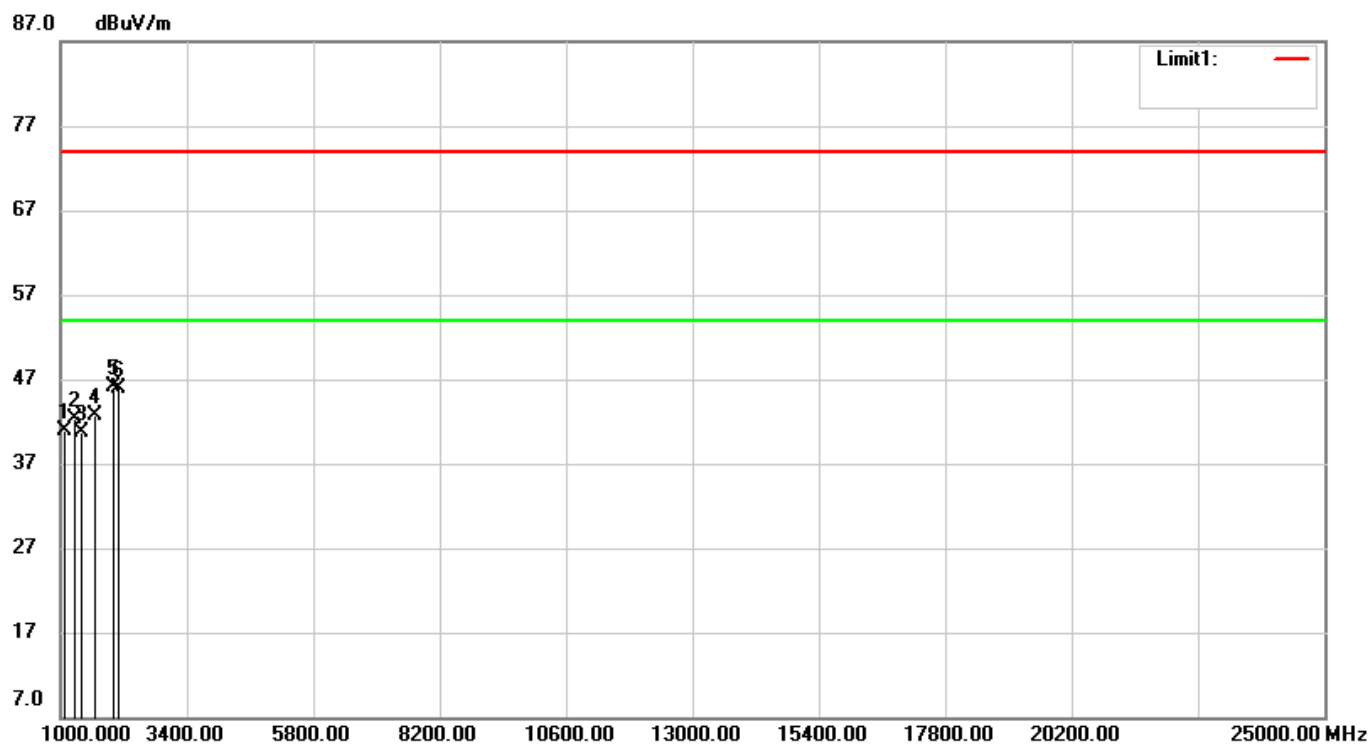

Condition: NCC_Above1G_Pk
EUT: Development Kit for PlayStation5
Model: DFI-D1000AA
Test Mode: BT2
Note: CH HIGH-1

Polarization: Vertical
Distance: 3m
Operator: Phillip

No.	Frequency (MHz)	Reading (dBuV/m)	Detector	Corrected dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
1	1069.55120	50.25	peak	-9.29	40.96	74.00	-33.04
2	1262.50000	51.06	peak	-8.79	42.27	74.00	-31.73
3	1367.94870	49.25	peak	-8.52	40.73	74.00	-33.27
4	1632.69230	49.61	peak	-7.00	42.61	74.00	-31.39
5	1993.91020	49.96	peak	-3.79	46.17	74.00	-27.83
6	2088.14100	49.37	peak	-3.49	45.88	74.00	-28.12

註: 1. 若以峰值檢測功能測量之值符合平均值限制值，則可視同以平均值功能測量之值亦符合平均值限制值。

2. 量測不準確度: $\pm 4.1\text{dB}(1\text{GHz} \leq f < 18\text{GHz})$
 $\pm 4.4\text{dB}(18\text{GHz} \leq f \leq 40\text{GHz})$

9.5.2.3 Normal Mode

操作模式: Mode E

File: 20-10-MAS-019_Above 1G #13 Date: 2020/11/12 Temperature: 22 °C
Site: RE02-EMC B1- N2 Humidity: 58 %



Condition: NCC_Above1G_Pk Polarization: Horizontal
EUT: Development Kit for PlayStation5 Distance: 3m
Model: DFI-D1000AA
Test Mode: Normal1 Operator: Phillip
Note: HDMI+USB+BT+LAN

No.	Frequency (MHz)	Reading (dBuV/m)	Detector	Corrected dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
1	1078.52540	54.83	peak	-9.26	45.57	74.00	-28.43
2	1112.17930	56.48	peak	-9.18	47.30	74.00	-26.70
3	1269.23070	54.94	peak	-8.77	46.17	74.00	-27.83
4	2413.46140	50.69	peak	-2.66	48.03	74.00	-25.97
5	3445.51270	47.80	peak	-1.25	46.55	74.00	-27.45
6	4758.01280	47.59	peak	0.95	48.54	74.00	-25.46

註: 1. 若以峰值檢測功能測量之值符合平均值限制值，則可視同以平均值功能測量之值亦符合平均值限制值。
2. 量測不準確度: $\pm 4.1\text{dB}(1\text{GHz} \leq f < 18\text{GHz})$
 $\pm 4.4\text{dB}(18\text{GHz} \leq f \leq 40\text{GHz})$

操作模式: Mode E

File: 20-10-MAS-019_Above 1G


#12

Date: 2020/11/12

Temperature: 22 °C

Site: RE02-EMC B1- N2

Humidity: 58 %

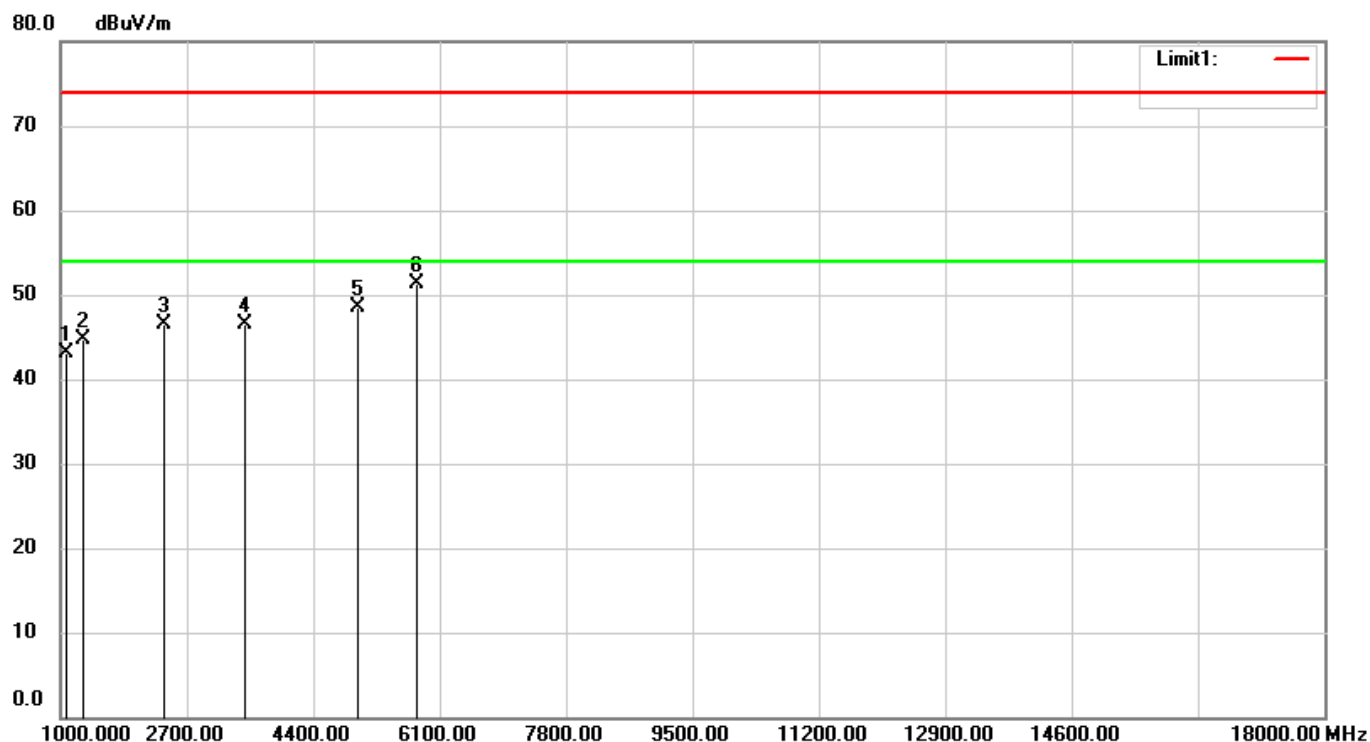

Condition: NCC_Above1G_Pk
 EUT: Development Kit for PlayStation5
 Model: DFI-D1000AA
 Test Mode: Normal1
 Note: HDMI+USB+BT+LAN

Polarization: Vertical
 Distance: 3m
 Operator: Phillip

No.	Frequency (MHz)	Reading (dBuV/m)	Detector	Corrected dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
1	1067.30760	52.39	peak	-9.29	43.10	74.00	-30.90
2	1291.66660	53.48	peak	-8.72	44.76	74.00	-29.24
3	2379.80760	49.27	peak	-2.74	46.53	74.00	-27.47
4	3467.94860	47.82	peak	-1.22	46.60	74.00	-27.40
5	5004.80760	47.04	peak	1.42	48.46	74.00	-25.54
6	5790.06410	48.72	peak	2.53	51.25	74.00	-22.75

註: 1. 若以峰值檢測功能測量之值符合平均值限制值，則可視同以平均值功能測量之值亦符合平均值限制值。

2. 量測不準確度: $\pm 4.1\text{dB}$ ($1\text{GHz} \leq f < 18\text{GHz}$)
 $\pm 4.4\text{dB}$ ($18\text{GHz} \leq f \leq 40\text{GHz}$)

操作模式: Mode F

File: 20-10-MAS-019_Above 1G


#11

Date: 2020/11/12

Temperature: 22 °C

Site: RE02-EMC B1- N2

Humidity: 58 %

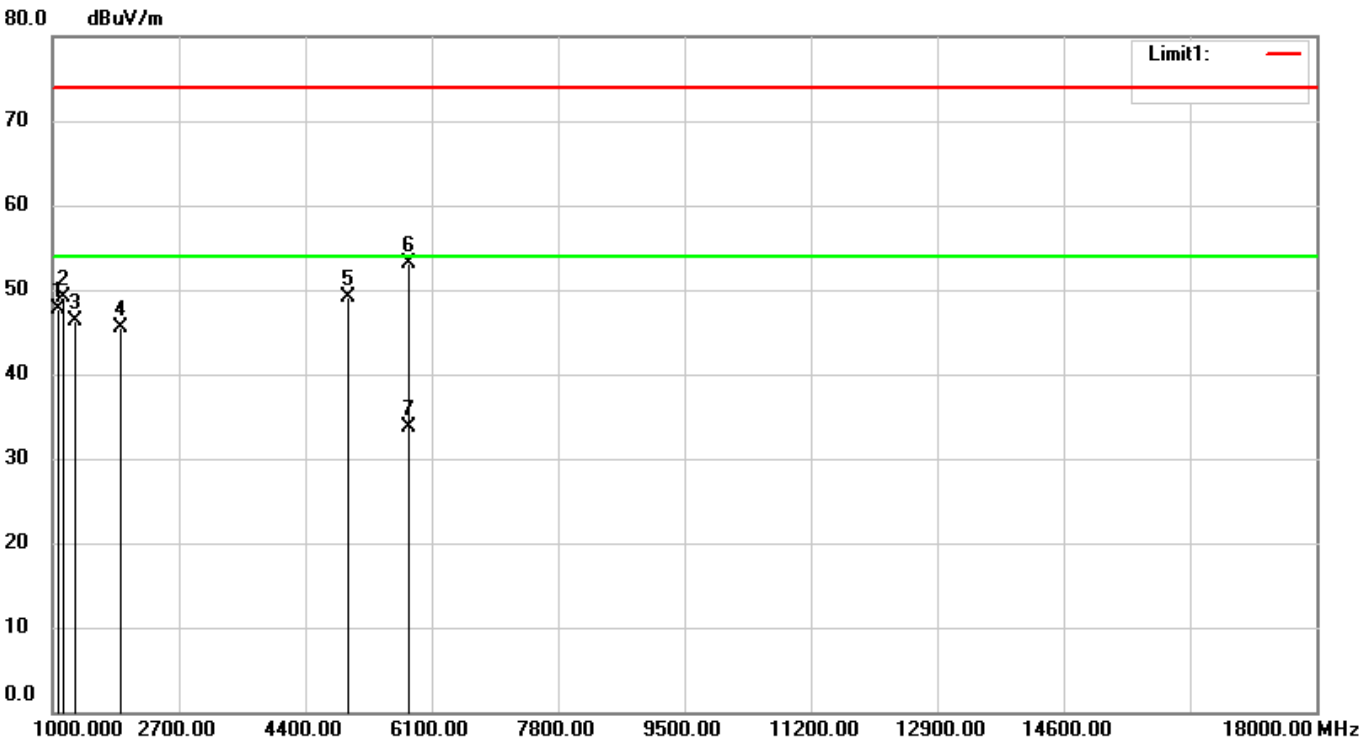

Condition: NCC_Above1G_Pk

Polarization: Horizontal

EUT: Development Kit for PlayStation5

Distance: 3m

Model: DFI-D1000AA

Operator: Phillip

Test Mode: Normal2

Note: HDMI+USB+BT+WIFI

No.	Frequency (MHz)	Reading (dBuV/m)	Detector	Corrected dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
1	1067.30760	56.98	peak	-9.29	47.69	74.00	-26.31
2	1112.17930	58.29	peak	-9.18	49.11	74.00	-24.89
3	1291.66660	55.09	peak	-8.72	46.37	74.00	-27.63
4	1919.87150	50.01	peak	-4.44	45.57	74.00	-28.43
5	4971.15380	47.66	peak	1.36	49.02	74.00	-24.98
6	5790.06410	50.57	peak	2.53	53.10	74.00	-20.90
7	5790.06410	31.13	AVG	2.53	33.66	54.00	-20.34

註: 1. 若以峰值檢測功能測量之值符合平均值限制值，則可視同以平均值功能測量之值亦符合平均值限制值。

2. 量測不準確度: $\pm 4.1\text{dB}(1\text{GHz} \leq f < 18\text{GHz})$
 $\pm 4.4\text{dB}(18\text{GHz} \leq f \leq 40\text{GHz})$

操作模式: Mode F

File: 20-10-MAS-019_Above 1G


#10

Date: 2020/11/12

Temperature: 22 °C

Site: RE02-EMC B1- N2

Humidity: 58 %

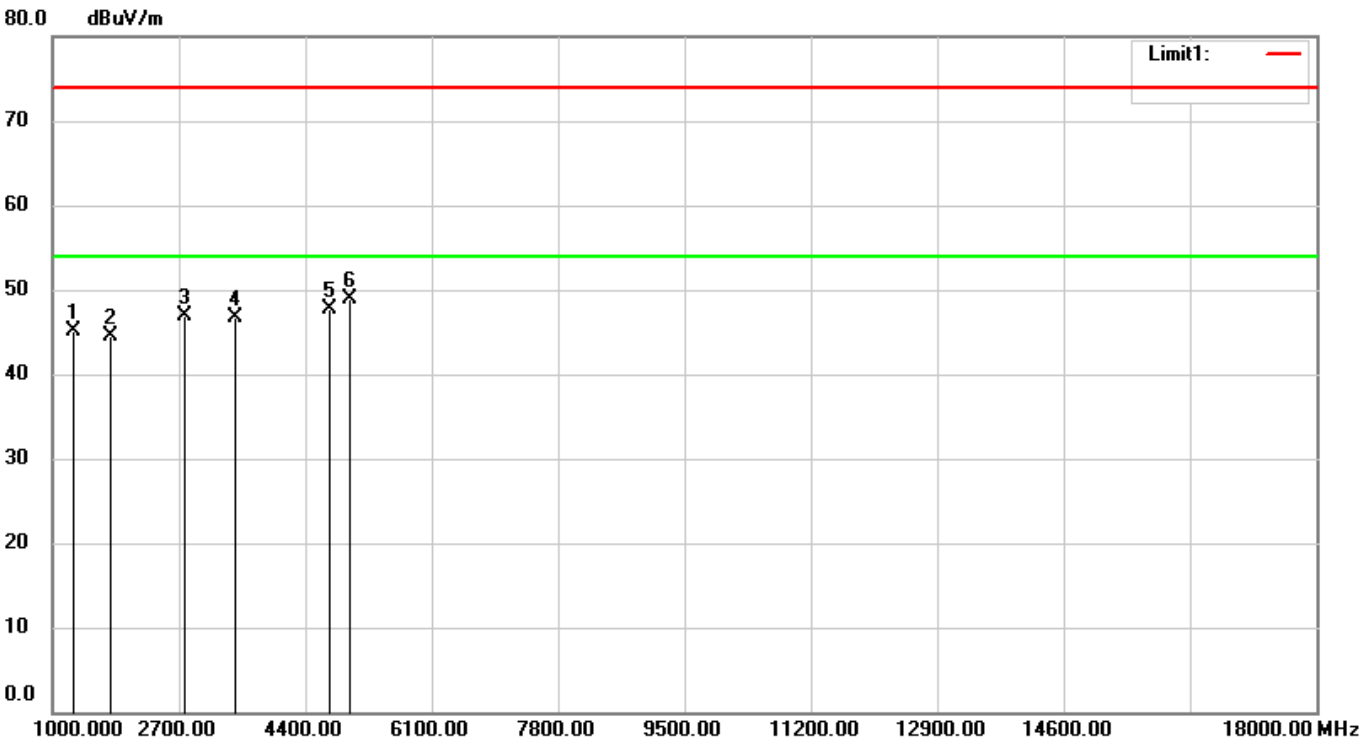

Condition: NCC_Above1G_Pk

Polarization: Vertical

EUT: Development Kit for PlayStation5

Distance: 3m

Model: DFI-D1000AA

Operator: Phillip

Test Mode: Normal2

Note: HDMI+USB+BT+WIFI

No.	Frequency (MHz)	Reading (dBuV/m)	Detector	Corrected dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
1	1258.01250	53.82	peak	-8.80	45.02	74.00	-28.98
2	1785.25630	50.11	peak	-5.64	44.47	74.00	-29.53
3	2750.00000	49.06	peak	-2.16	46.90	74.00	-27.10
4	3434.29480	47.93	peak	-1.27	46.66	74.00	-27.34
5	4713.14100	46.84	peak	0.87	47.71	74.00	-26.29
6	4993.58970	47.43	peak	1.40	48.83	74.00	-25.17

註: 1. 若以峰值檢測功能測量之值符合平均值限制值，則可視同以平均值功能測量之值亦符合平均值限制值。

2. 量測不準確度: $\pm 4.1\text{dB}(1\text{GHz} \leq f < 18\text{GHz})$
 $\pm 4.4\text{dB}(18\text{GHz} \leq f \leq 40\text{GHz})$

9.5.3 其它不必要之訊號1GHz以下

9.5.3.1 測試狀態: BT_Module1

File: 20-10-MAS-019_Below 1G


#11

Date: 2020/11/12

Temperature: 22 °C

Site: RE02-EMC B1-N2

Humidity: 58 %

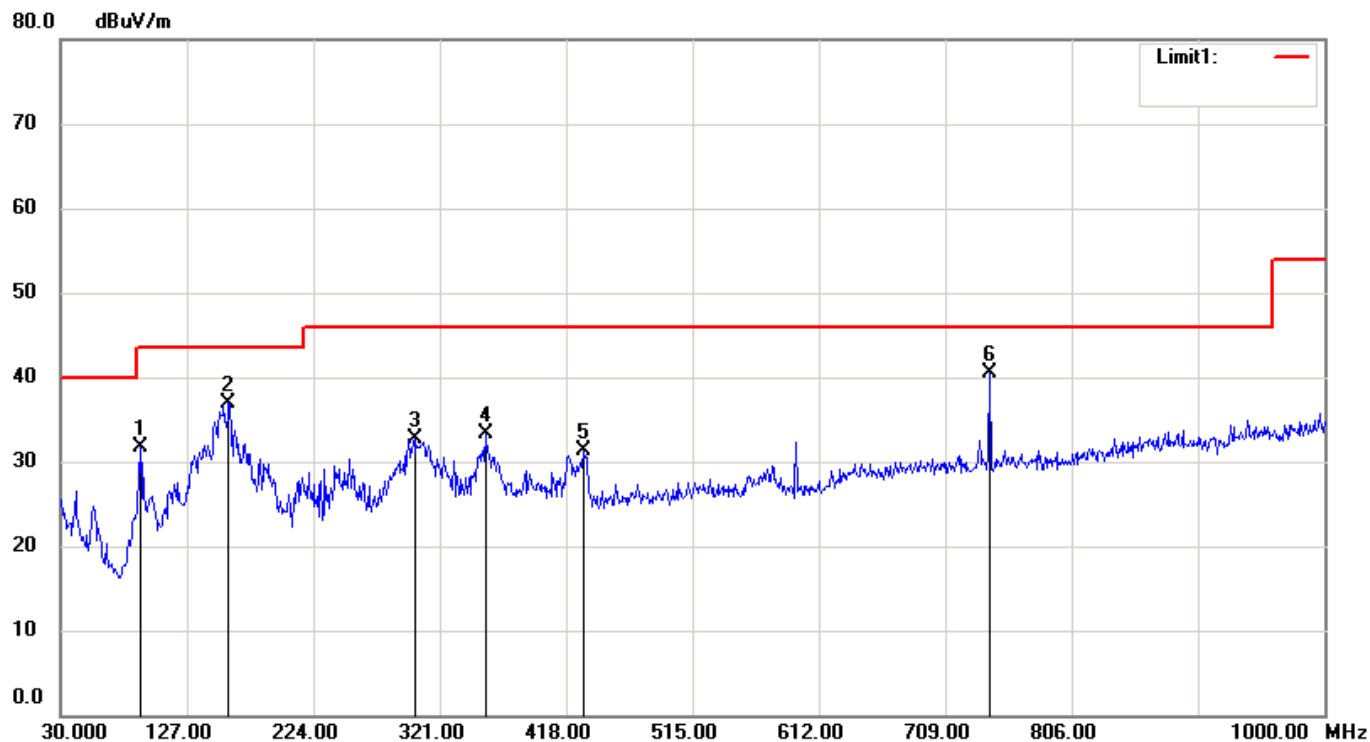

Condition: NCC_LP0002_30-1000MHz
 EUT: Development Kit for PlayStation5
 Model: DFI-D1000AA
 Test Mode: BT1
 Note:

Polarization: Horizontal
 Distance: 3m
 Operator: Phillip

No.	Frequency (MHz)	Reading (dBuV/m)	Detector	Corrected dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
1	91.1100	42.28	QP	-10.55	31.73	43.50	-11.77
2	159.0100	43.30	QP	-6.31	36.99	43.50	-6.51
3	301.6000	37.03	QP	-4.36	32.67	46.00	-13.33
4	355.9200	36.74	QP	-3.42	33.32	46.00	-12.68
5	431.5800	33.18	QP	-1.91	31.27	46.00	-14.73
6*	742.9500	37.70	QP	2.85	40.55	46.00	-5.45


File: 20-10-MAS-019_Below 1G
Site: RE02-EMC B1-N2

#12

Date: 2020/11/12

Temperature: 22 °C

Humidity: 58 %

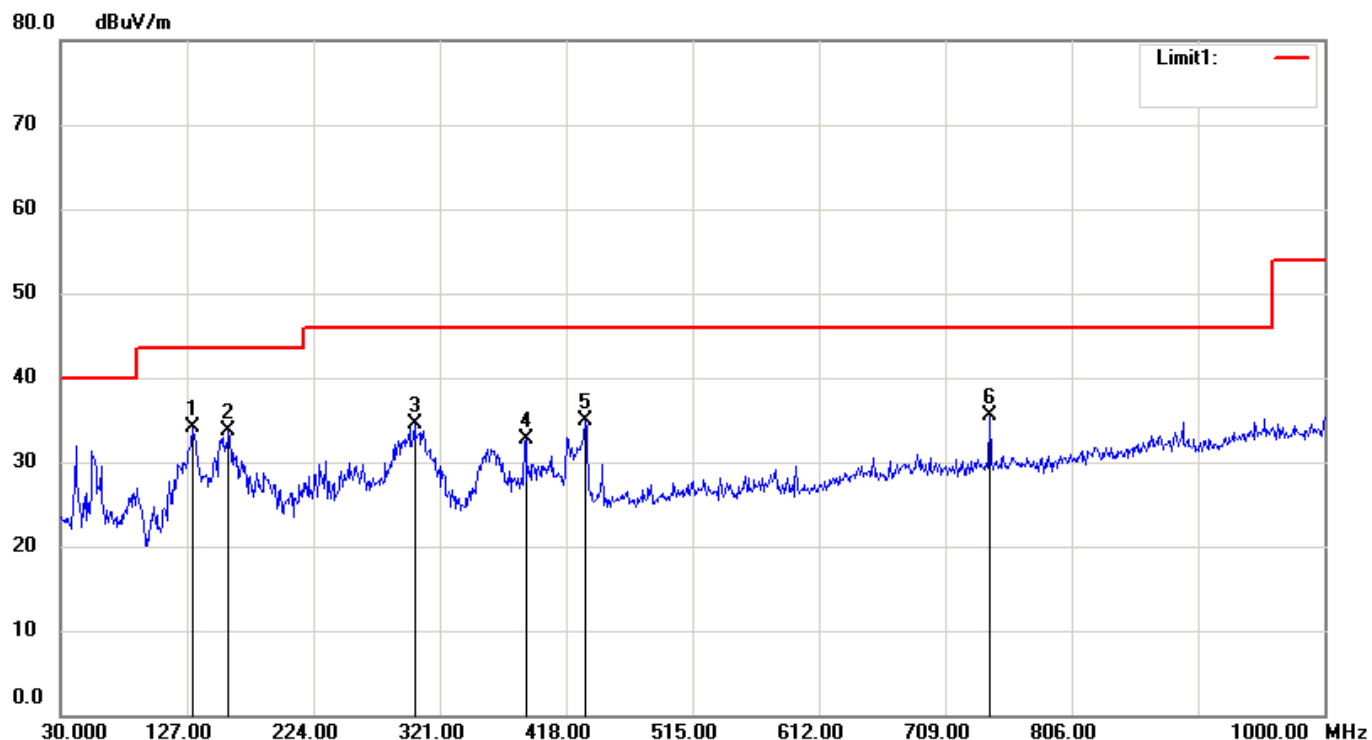

Condition: NCC_LP0002_30-1000MHz
EUT: Development Kit for PlayStation5
Model: DFI-D1000AA
Test Mode: BT1
Note:

Polarization: Vertical
Distance: 3m
Operator: Phillip

No.	Frequency (MHz)	Reading (dBuV/m)	Detector	Corrected dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
1*	130.8800	37.57	QP	-3.50	34.07	43.50	-9.43
2	159.0100	40.02	QP	-6.31	33.71	43.50	-9.79
3	301.6000	38.87	QP	-4.36	34.51	46.00	-11.49
4	386.9600	35.05	QP	-2.43	32.62	46.00	-13.38
5	432.5500	36.76	QP	-1.91	34.85	46.00	-11.15
6	742.9500	32.70	QP	2.85	35.55	46.00	-10.45

註：1. 若以峰值檢測功能測量之值符合準峰值限制值，則可視同以準峰值功能測量之值亦符合準峰值限制值。

2. 量測不準確度: +4.20dB/ -4.24 dB (30MHz ≤ f < 1GHz)

9.5.3.2 測試狀態: BT_Module2

File: 20-10-MAS-019_Below 1G


#13

Date: 2020/11/12

Temperature: 22 °C

Site: RE02-EMC B1-N2

Humidity: 58 %

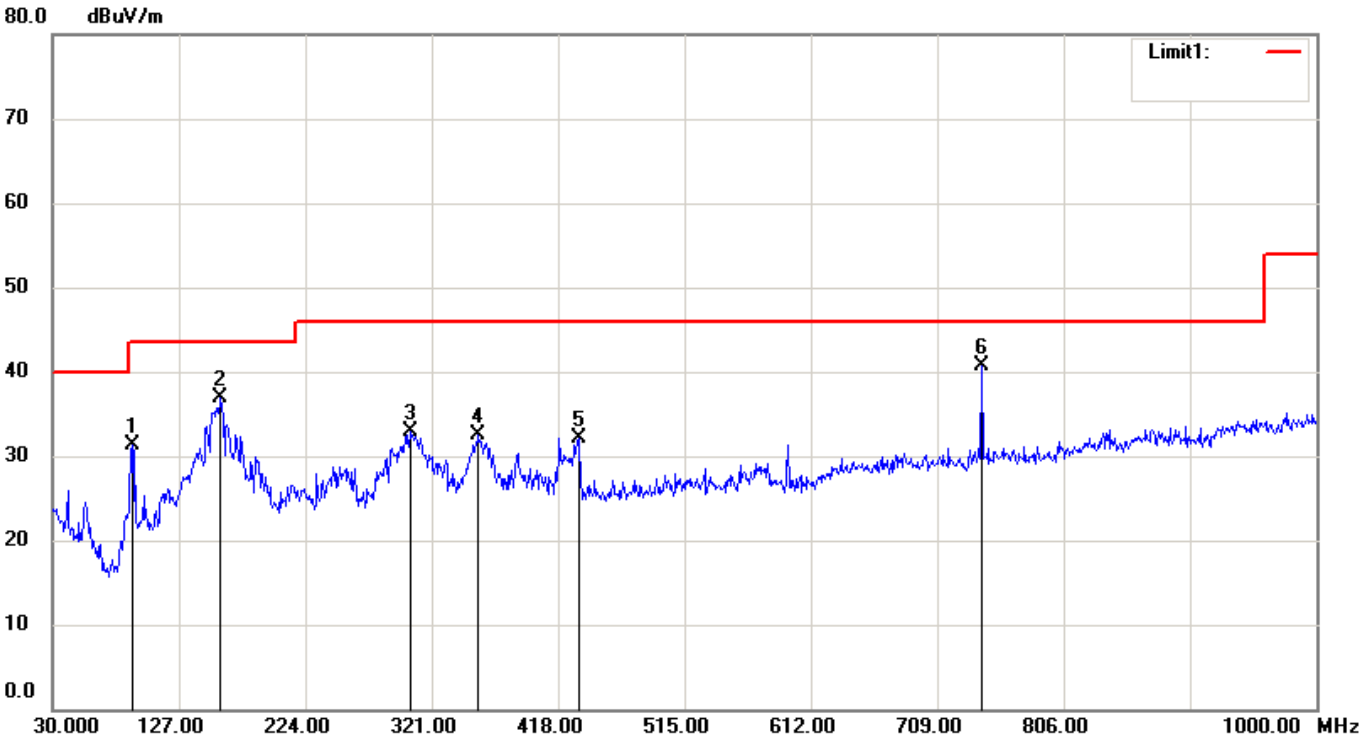

Condition: NCC_LP0002_30-1000MHz

EUT: Development Kit for PlayStation5

Model: DFI-D1000AA

Test Mode: BT2

Note:

Polarization: Horizontal

Distance: 3m

Operator: Phillip

No.	Frequency (MHz)	Reading (dBuV/m)	Detector	Corrected dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
1	91.1100	41.77	QP	-10.55	31.22	43.50	-12.28
2	159.0100	43.21	QP	-6.31	36.90	43.50	-6.60
3	304.5100	37.27	QP	-4.32	32.95	46.00	-13.05
4	356.8900	35.98	QP	-3.39	32.59	46.00	-13.41
5	433.5200	34.11	QP	-1.91	32.20	46.00	-13.80
6*	742.9500	37.83	QP	2.85	40.68	46.00	-5.32


File: 20-10-MAS-019_Below 1G
Site: RE02-EMC B1-N2

#14

Date: 2020/11/12

Temperature: 22 °C

Humidity: 58 %

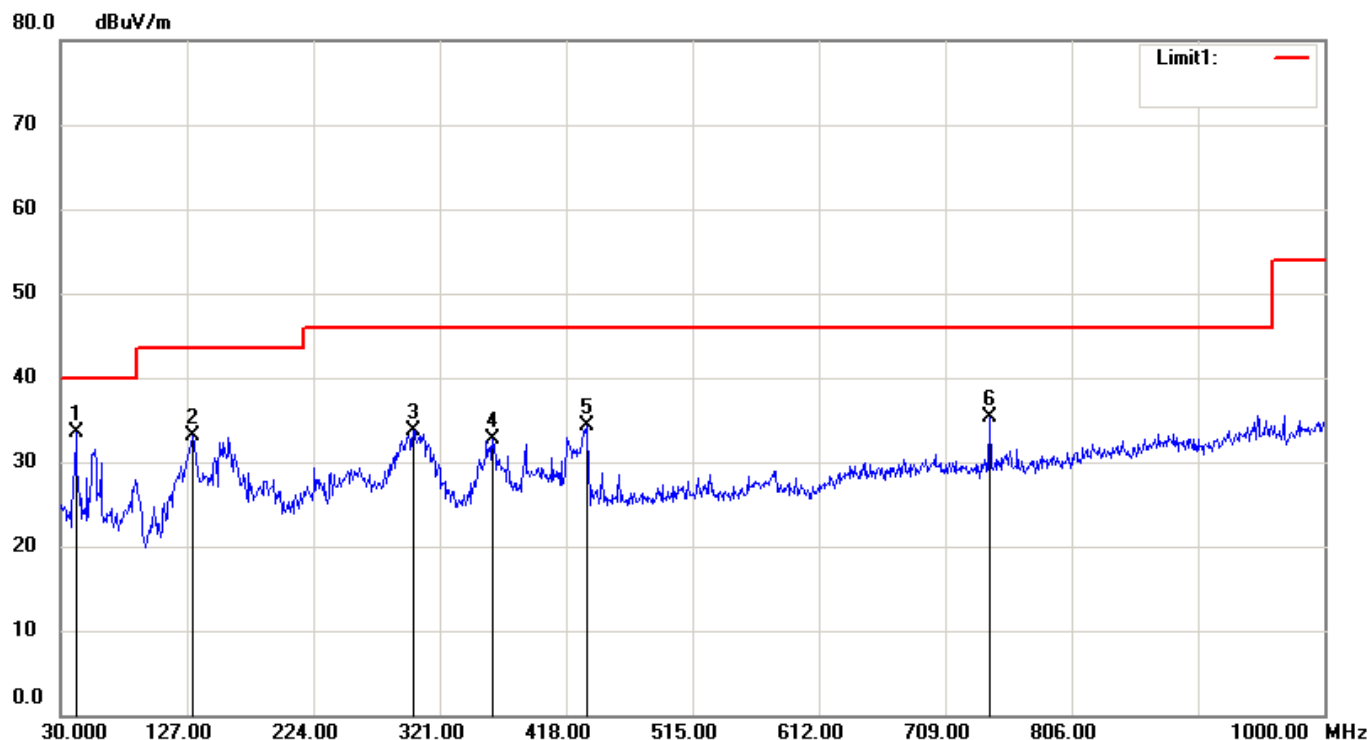

Condition: NCC_LP0002_30-1000MHz
EUT: Development Kit for PlayStation5
Model: DFI-D1000AA
Test Mode: BT2
Note:

Polarization: Vertical
Distance: 3m
Operator: Phillip

No.	Frequency (MHz)	Reading (dBuV/m)	Detector	Corrected dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
1*	41.6400	39.13	QP	-5.59	33.54	40.00	-6.46
2	131.8500	36.71	QP	-3.55	33.16	43.50	-10.34
3	300.6300	38.05	QP	-4.38	33.67	46.00	-12.33
4	361.7400	36.00	QP	-3.24	32.76	46.00	-13.24
5	433.5200	36.26	QP	-1.91	34.35	46.00	-11.65
6	742.9500	32.46	QP	2.85	35.31	46.00	-10.69

註：1. 若以峰值檢測功能測量之值符合準峰值限制值，則可視同以準峰值功能測量之值亦符合準峰值限制值。

2. 量測不準確度: +4.20dB/ -4.24 dB (30MHz ≤ f < 1GHz)

9.5.3.3 測試狀態: Mode E


File: 20-10-MAS-019_Below 1G
Site: RE02-EMC B1-N2

#23

Date: 2020/11/12

Temperature: 22 °C

Humidity: 58 %

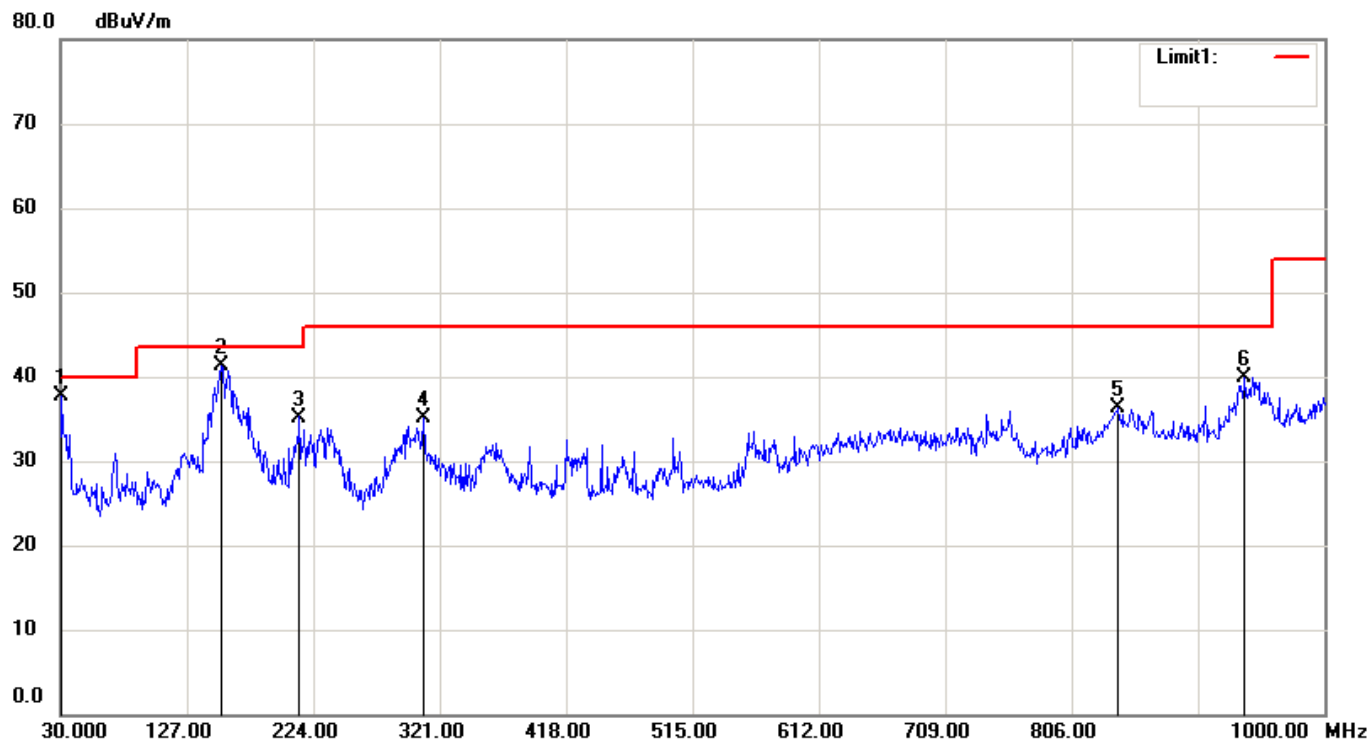

Condition: NCC_LP0002_30-1000MHz
EUT: Development Kit for PlayStation5
Model: DFI-D1000AA
Test Mode: Normal1
Note: HDMI+USB+BT+LAN

Polarization: Horizontal
Distance: 3m
Operator: Phillip

No.	Frequency (MHz)	Reading (dBuV/m)	Detector	Corrected dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
1	30.9700	41.33	QP	-3.64	37.69	40.00	-2.31
2*	153.1900	46.74	QP	-5.49	41.25	43.50	-2.25
3	213.3300	44.09	QP	-8.89	35.20	43.50	-8.30
4	308.3900	39.30	QP	-4.25	35.05	46.00	-10.95
5	841.8900	31.34	QP	4.92	36.26	46.00	-9.74
6	938.8900	33.20	QP	6.79	39.99	46.00	-6.01


File: 20-10-MAS-019_Below 1G
Site: RE02-EMC B1-N2

#24

Date: 2020/11/12

Temperature: 22 °C

Humidity: 58 %

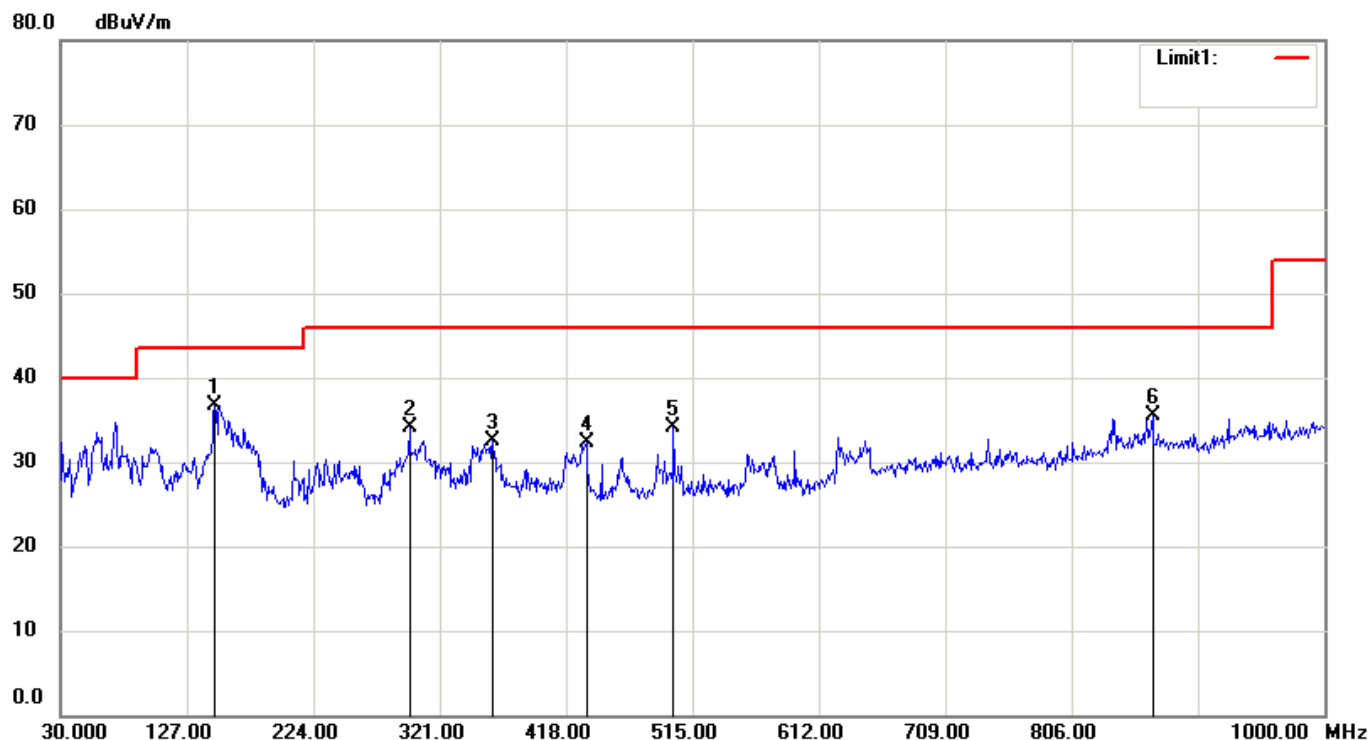

Condition: NCC_LP0002_30-1000MHz
EUT: Development Kit for PlayStation5
Model: DFI-D1000AA
Test Mode: Normal1
Note: HDMI+USB+BT+LAN

Polarization: Vertical
Distance: 3m
Operator: Phillip

No.	Frequency (MHz)	Reading (dBuV/m)	Detector	Corrected dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
1*	148.3400	41.58	QP	-4.85	36.73	43.50	-6.77
2	297.7200	38.58	QP	-4.42	34.16	46.00	-11.84
3	361.7400	35.71	QP	-3.24	32.47	46.00	-13.53
4	433.5200	34.17	QP	-1.91	32.26	46.00	-13.74
5	500.4500	35.37	QP	-1.22	34.15	46.00	-11.85
6	868.0800	30.20	QP	5.39	35.59	46.00	-10.41

註：1. 若以峰值檢測功能測量之值符合準峰值限制值，則可視同以準峰值功能測量之值亦符合準峰值限制值。

2. 量測不準確度: +4.20dB/ -4.24 dB (30MHz ≤ f < 1GHz)

9.5.3.4 測試狀態: Mode F


File: 20-10-MAS-019_Below 1G
Site: RE02-EMC B1-N2

#25

Date: 2020/11/12

Temperature: 22 °C

Humidity: 58 %

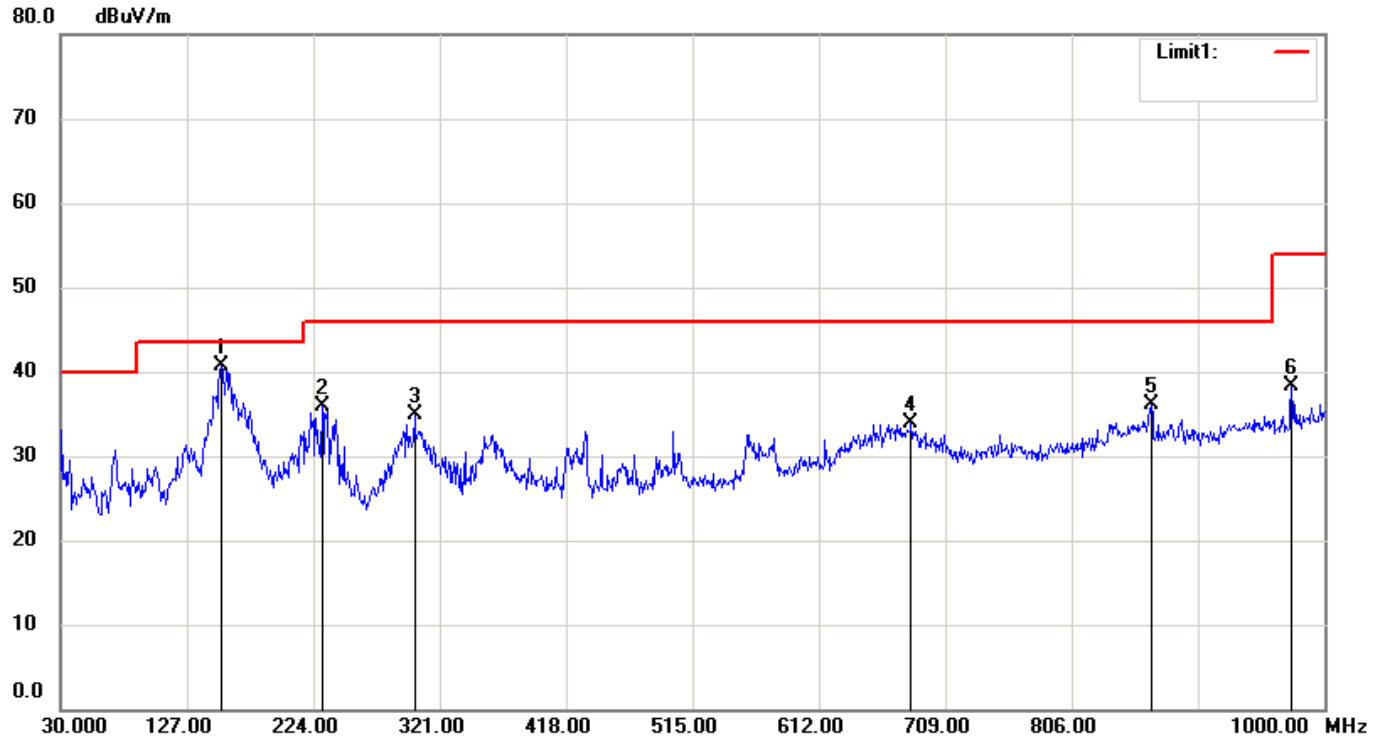

Condition: NCC_LP0002_30-1000MHz
EUT: Development Kit for PlayStation5
Model: DFI-D1000AA
Test Mode: Normal2
Note: HDMIUSB+ BT+WIFI

Polarization: Horizontal
Distance: 3m
Operator: Phillip

No.	Frequency (MHz)	Reading (dBuV/m)	Detector	Corrected dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
1*	153.1900	46.14	QP	-5.49	40.65	43.50	-2.85
2	230.7900	43.45	QP	-7.63	35.82	46.00	-10.18
3	301.6000	39.34	QP	-4.36	34.98	46.00	-11.02
4	682.8100	31.61	QP	2.21	33.82	46.00	-12.18
5	867.1100	30.65	QP	5.37	36.02	46.00	-9.98
6	974.7800	30.74	QP	7.59	38.33	54.00	-15.67


File: 20-10-MAS-019_Below 1G
Site: RE02-EMC B1-N2

#26

Date: 2020/11/12

Temperature: 22 °C

Humidity: 58 %

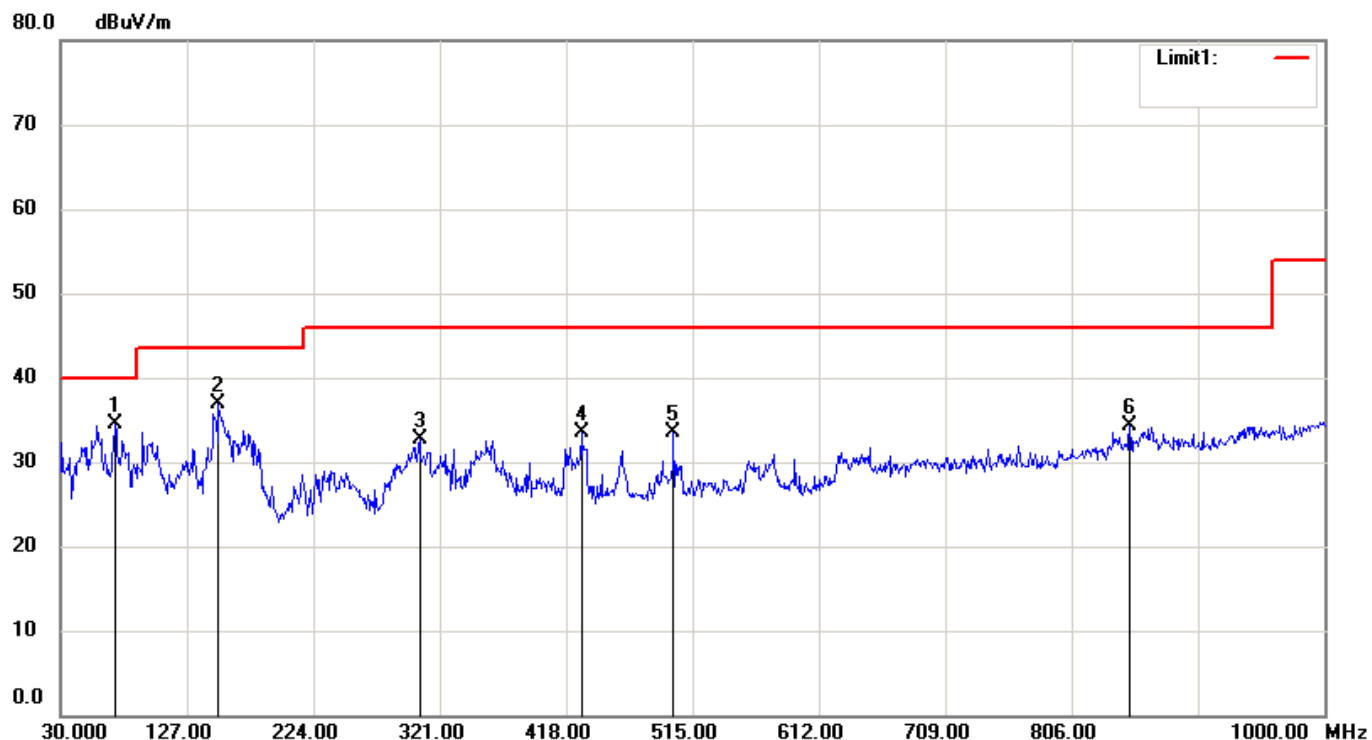

Condition: NCC_LP0002_30-1000MHz
EUT: Development Kit for PlayStation5
Model: DFI-D1000AA
Test Mode: Normal2
Note: HDMIUSB+BT+WIFI

Polarization: Vertical
Distance: 3m
Operator: Phillip

No.	Frequency (MHz)	Reading (dBuV/m)	Detector	Corrected dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
1*	71.7100	47.06	QP	-12.48	34.58	40.00	-5.42
2	151.2500	42.21	QP	-5.22	36.99	43.50	-6.51
3	305.4800	37.07	QP	-4.30	32.77	46.00	-13.23
4	429.6400	35.46	QP	-1.90	33.56	46.00	-12.44
5	500.4500	34.67	QP	-1.22	33.45	46.00	-12.55
6	850.6200	29.03	QP	5.18	34.21	46.00	-11.79

註：1. 若以峰值檢測功能測量之值符合準峰值限制值，則可視同以準峰值功能測量之值亦符合準峰值限制值。

2. 量測不準確度: +4.20dB/ -4.24 dB ($30\text{MHz} \leq f < 1\text{GHz}$)

9.5.4 測量儀器之設定

Frequency Band (MHz)	Instrument	Function	Resolution Bandwidth	Video Bandwidth
30 to 1000	EMI Receiver	Quasi Peak	120 kHz	300 kHz
	EMI Receiver	Peak	100 kHz	100 kHz
1000 to 30000	Spectrum Analyzer	Peak	1 MHz	1 MHz
	Spectrum Analyzer	Average	1 MHz	10 Hz

9.5.5 禁用頻段邊緣之輻射場強測量結果

測試日期: Nov. 05, 2020

環境溫度: 23°C

環境濕度: 50%

9.5.5.1 BT_Module1

9.5.5.1.1 測試狀態: NON-EDR

主波 頻道	輻射 頻率	儀器讀值@3m (dBuV/m)				校正 因子	結果值		限制值@3m		餘裕值 (worse)	
		水平		垂直			(dBuV/m)		(dBuV/m)		(dB)	
	(MHz)	峰值	平均值	峰值	平均值	(dB)	峰值	平均值	峰值	平均值	峰值	平均值
CH Low	2390.000	27.62	14.00	27.52	14.01	34.62	62.24	48.63	74.00	54.00	-11.76	-5.37
CH High	2483.500	27.70	15.49	27.84	18.40	34.84	62.68	53.24	74.00	54.00	-11.32	-0.76

9.5.5.1.2 測試狀態: EDR

主波 頻道	輻射 頻率	儀器讀值@3m (dBuV/m)				校正 因子	結果值		限制值@3m		餘裕值 (worse)	
		水平		垂直			(dBuV/m)		(dBuV/m)		(dB)	
	(MHz)	峰值	平均值	峰值	平均值	(dB)	峰值	平均值	峰值	平均值	峰值	平均值
CH Low	2390.000	27.38	13.99	27.35	14.00	34.62	62.00	48.62	74.00	54.00	-12.00	-5.38
CH High	2483.500	28.05	16.02	28.94	18.83	34.84	63.78	53.67	74.00	54.00	-10.22	-0.33

註: 1. 量測不準確度: $\pm 4.1\text{dB}$ ($1\text{GHz} \leq f \leq 18\text{GHz}$)

2. 量測頻率範圍為 2310 ~ 2390 MHz 及 2483.5 ~ 2900 MHz, 並記錄兩頻率範圍中之最大讀值。

9.5.5.2 BT_Module2

9.5.5.2.1 測試狀態: NON-EDR

主波 頻道	輻射 頻率	儀器讀值@3m (dBuV/m)				校正 因子	結果值		限制值@3m		餘裕值 (worse)	
		水平		垂直			(dBuV/m)		(dBuV/m)		(dB)	
	(MHz)	峰值	平均值	峰值	平均值	(dB)	峰值	平均值	峰值	平均值	峰值	平均值
CH Low	2390.000	27.52	14.08	27.86	14.07	34.62	62.48	48.70	74.00	54.00	-11.52	-5.30
CH High	2483.500	27.79	15.73	28.60	18.21	34.84	63.44	53.05	74.00	54.00	-10.56	-0.95

9.5.5.2.2 測試狀態: EDR

主波 頻道	輻射 頻率	儀器讀值@3m (dBuV/m)				校正 因子	結果值		限制值@3m		餘裕值 (worse)	
		水平		垂直			(dBuV/m)		(dBuV/m)		(dB)	
	(MHz)	峰值	平均值	峰值	平均值	(dB)	峰值	平均值	峰值	平均值	峰值	平均值
CH Low	2390.000	27.80	14.09	27.57	14.08	34.62	62.42	48.71	74.00	54.00	-11.58	-5.29
CH High	2483.500	28.27	16.33	28.58	18.68	34.84	63.42	53.52	74.00	54.00	-10.58	-0.48

註: 1. 量測不準確度: $\pm 4.1\text{dB}$ ($1\text{GHz} \leq f \leq 18\text{GHz}$)

2. 量測頻率範圍為 2310 ~ 2390 MHz 及 2483.5 ~ 2900 MHz，並記錄兩頻率範圍中之最大讀值。

9.6 結果判定

使用頻帶外之干擾功率皆低於限制值要求，符合標準規定。

9.7 輻射之測試配置

圖 3: 量測頻率低於1GHz之測試配置


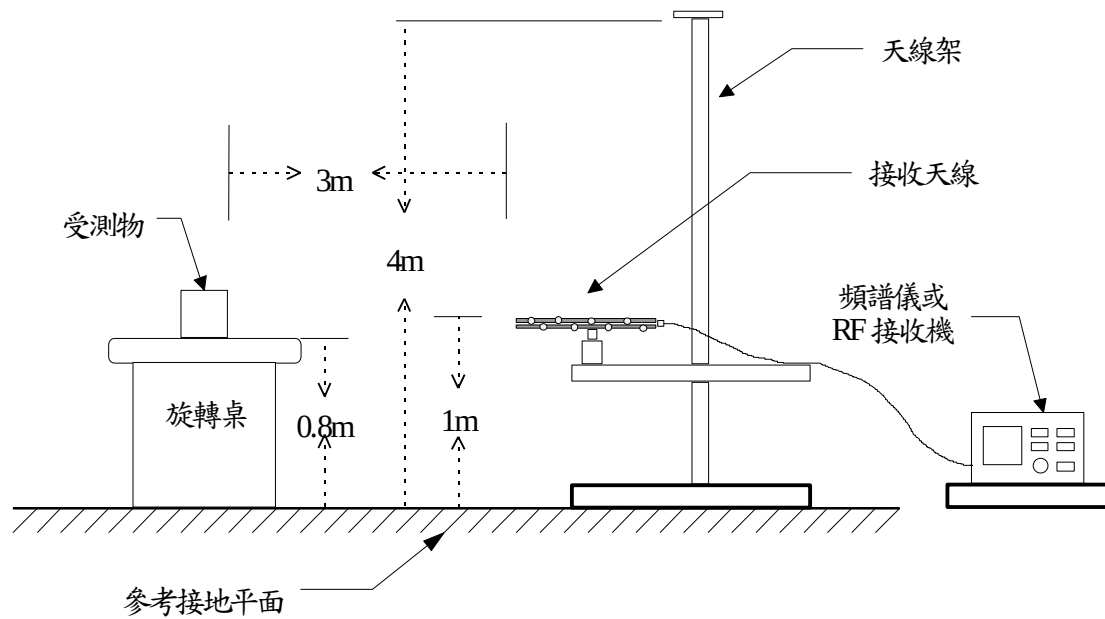


圖 4: 量測頻率高於1GHz之測試配置

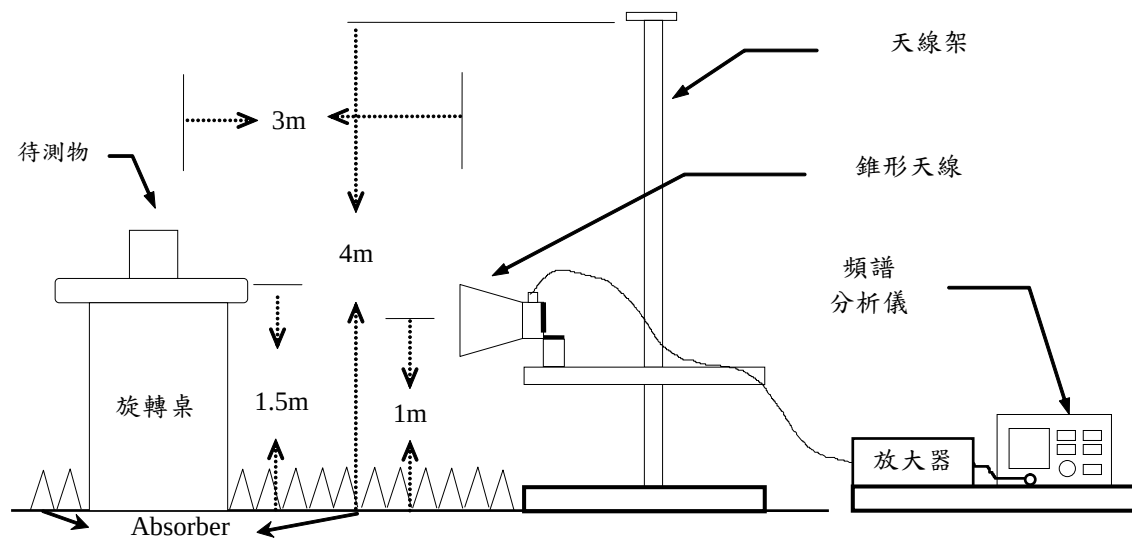

9.8 輻射量測之配置照片

請參考產品照片

10 量測之儀器

儀器名稱	製造者	型號	財產編號/序號	校驗日期	下次校驗日期
EMI Test Receiver	R&S	ESCI	13054418-001	11/26/2019	11/25/2020
V-LISN	R&S	ENV216	13057719-001	09/14/2020	09/13/2021
Spectrum Analyzer	R&S	FSV	13052017-001	06/12/2020	06/11/2021
Attenuator	WEINSCHEL	56-10	58772	04/24/2020	04/23/2021
EMI Receiver	R&S	ESCI	13054423-001	12/24/2019	12/25/2020
Spectrum Analyzer	R&S	FSU46	13040904-001	05/28/2020	05/27/2021
Horn Antenna	EMCO	3117	13059211-004	04/21/2020	04/20/2021
Horn Antenna	EMCO	3116	13059202-001	11/15/2019	11/14/2020
PRE-Amplifier	Agilent	8449B	13040709-001	12/31/2019	12/30/2020
PRE-Amplifier	Agilent	8447D	13040715-002	04/22/2020	04/21/2021
BiLog Antenna	ETC	MCTD 2786	BL19J04024	01/14/2020	01/13/2021