

Test Report No.50256825 001

Appendix D: Radiated and Mains Spurious Emission Data

(File: 50256825 001 AppendixD)

Contents

Spurious Emissions, Band Edges, 2.35-2.5G 3

Spurious Emissions, TX Mode, 1-18G.....19

Spurious Emissions, TX Mode, 18-26G.....31

Spurious Emissions, TX Mode, 30M-1G 43

Spurious Emissions, TX Mode, 9k-30M 45

Spurious Emissions, RX Mode, 1-18G 47

Spurious Emissions, RX Mode, 18-26G 51

Spurious Emissions, RX Mode, 30M-1G.....55

Spurious Emissions, RX Mode, 9K-30M.....57


Mains 59

Spurious Emissions, Band Edges, 2.35-2.5G

Radiated Bandedge (GFSK), Low Channel




TUV Rheinland Taiwan Ltd.
11F., No. 758, Sec. 4 Bade Road. Songshan Dist, Taipei City 105
Tel:+886-2172-7000 Fax:+886-2528-0018

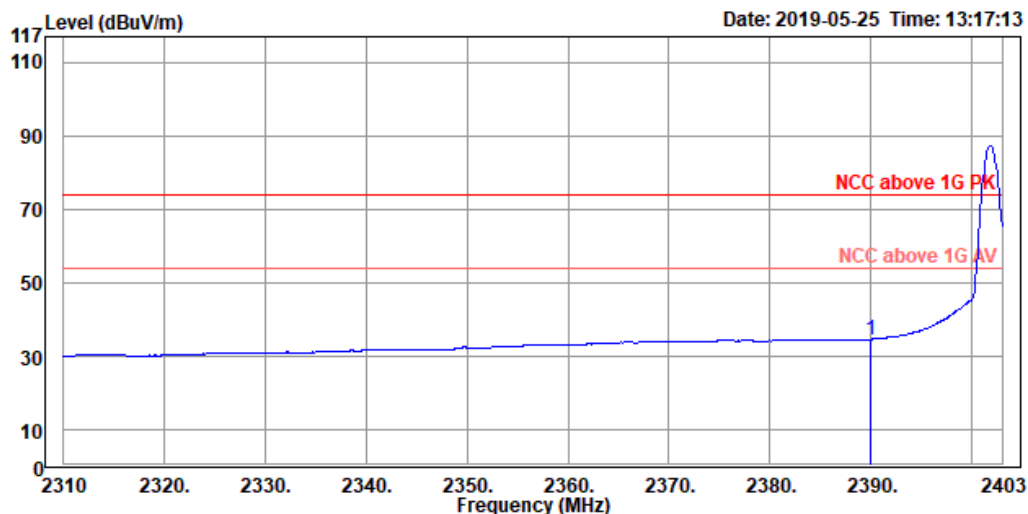


Site : 966A Chamber A
Condition : NCC above 1G PK 3m Horizontal
Test Engineer: Curry Chen
Product : Wii/Wii-U/SW/PS4 to SW/P4 controller adapter
Model No. : ZPPA00G
Test Rating : DC 5V
Tmp/Hum : 22°C/63%
Power Setting: 15
Mode : BT 1DH5 TX 2402
Memo : Z

	Freq	Level	Read Level	Factor	Limit Line	Over Limit	APos	TPos	Remark	Note
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg		
1	2390.000	34.42	42.52	-8.10	54.00	-19.58	124	188	Average	

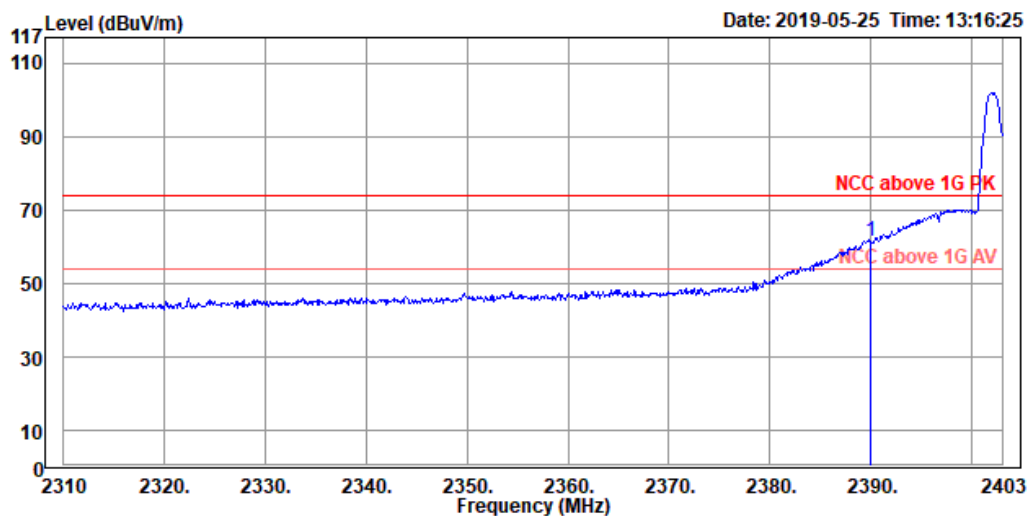


Site : 966A Chamber A
Condition : NCC above 1G PK 3m Horizontal
Test Engineer: Curry Chen
Product : Wii/Wii-U/SW/PS4 to SW/P4 controller adapter
Model No. : ZPPA00G
Test Rating : DC 5V
Tmp/Hum : 22°C/63%
Power Setting: 15
Mode : BT 1DH5 TX 2402
Memo : Z

	Freq	Level	Read Level	Factor	Limit Line	Over Limit	APos	TPos	Remark	Note
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg		
1	2390.000	61.33	69.43	-8.10	74.00	-12.67	124	188	Peak	

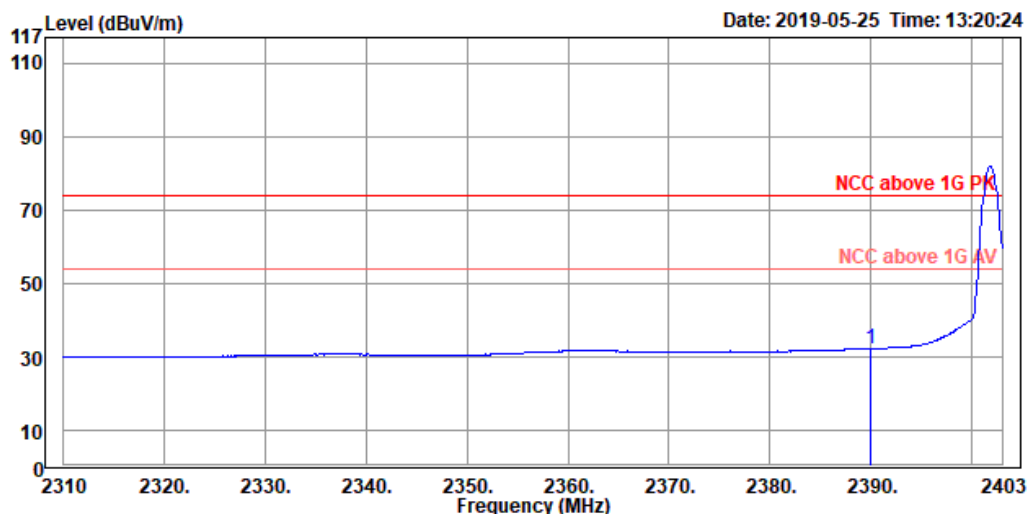

Site : 966A Chamber A
Condition : NCC above 1G PK 3m Vertical
Test Engineer: Curry Chen
Product : Wii/Wii-U/SW/PS4 to SW/P4 controller adapter
Model No. : ZPPA00G
Test Rating : DC 5V
Tmp/Hum : 22°C/63%
Power Setting: 15
Mode : BT 1DH5 TX 2402
Memo : Z

	Freq	Level	Read Level	Factor	Limit Line	Over Limit	APos	TPos	Remark	Note
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg		
1	2390.000	31.93	40.03	-8.10	54.00	-22.07	110	50	Average	

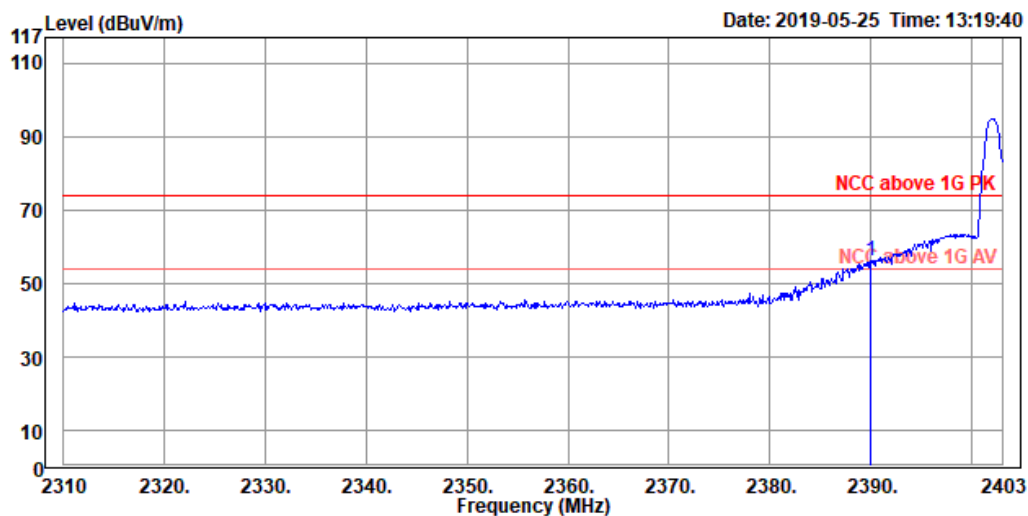


Site : 966A Chamber A
Condition : NCC above 1G PK 3m Vertical
Test Engineer: Curry Chen
Product : Wii/Wii-U/SW/PS4 to SW/P4 controller adapter
Model No. : ZPPA00G
Test Rating : DC 5V
Tmp/Hum : 22°C/63%
Power Setting: 15
Mode : BT 1DH5 TX 2402
Memo : Z

	Freq	Level	Read Level	Factor	Limit Line	Over Limit	APos	TPos	Remark	Note
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg		
1	2390.000	55.99	64.09	-8.10	74.00	-18.01	110	50	Peak	

Radiated Bandedge (GFSK), High Channel




TUV Rheinland Taiwan Ltd.
11F., No. 758, Sec. 4 Bade Road. Songshan Dist, Taipei City 105
Tel:+886-2172-7000 Fax:+886-2528-0018

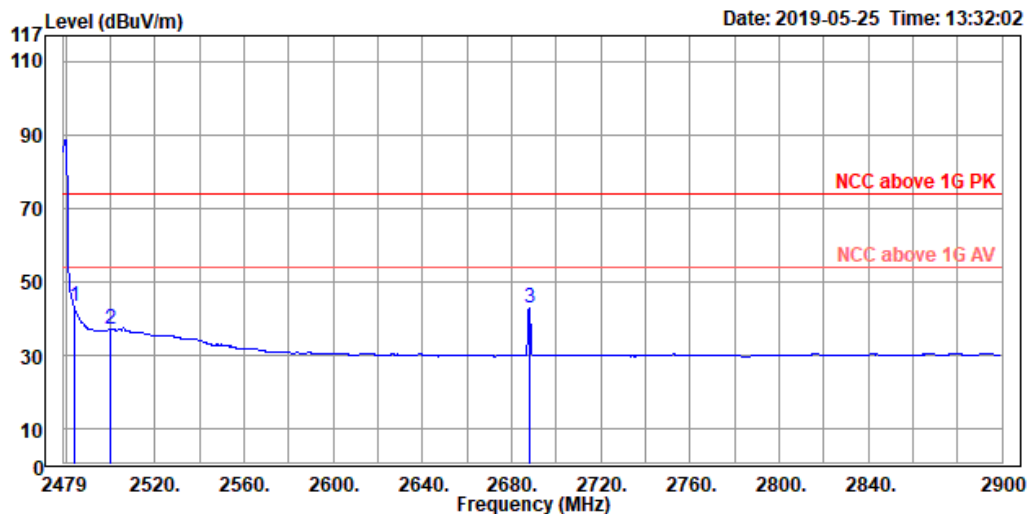


Site : 966A Chamber A
Condition : NCC above 1G PK 3m Horizontal
Test Engineer: Curry Chen
Product : Wii/Wii-U/SW/PS4 to SW/P4 controller adapter
Model No. : ZPPA00G
Test Rating : DC 5V
Tmp/Hum : 22°C/63%
Power Setting: 15
Mode : BT 1DH5 TX 2480
Memo : Z

	Freq	Level	Read Level	Factor	Limit Line	Over Limit	APos	TPos	Remark	Note
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg		
1	2483.500	43.10	51.19	-8.09	54.00	-10.90	114	142	Average	
2	2500.000	36.75	44.84	-8.09	54.00	-17.25	114	142	Average	
3	2687.816	42.92	50.70	-7.78	54.00	-11.08	114	142	Average	

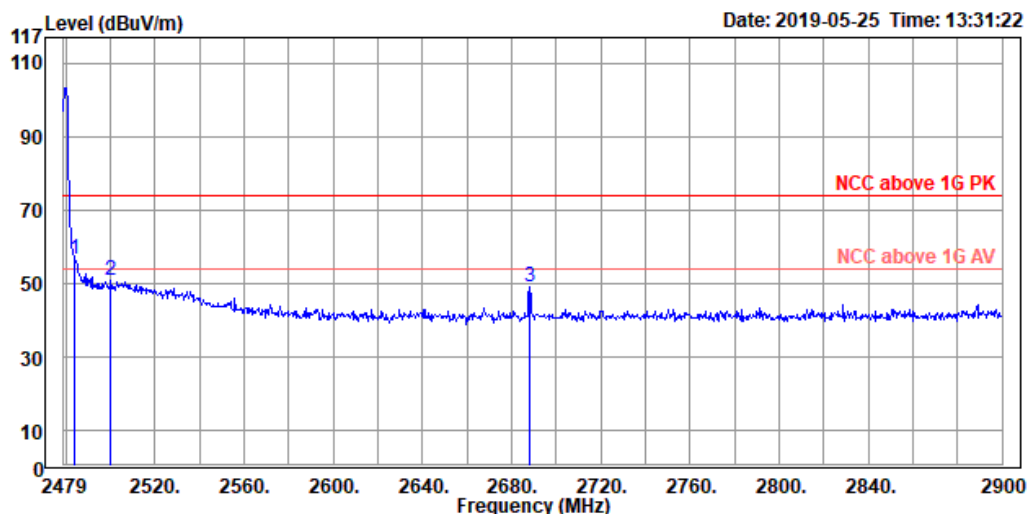


Site : 966A Chamber A
Condition : NCC above 1G PK 3m Horizontal
Test Engineer: Curry Chen
Product : Wii/Wii-U/SW/PS4 to SW/P4 controller adapter
Model No. : ZPPA00G
Test Rating : DC 5V
Tmp/Hum : 22°C/63%
Power Setting: 15
Mode : BT 1DH5 TX 2480
Memo : Z

	Freq	Level	Read Level	Factor	Limit Line	Over Limit	APos	TPos	Remark	Note
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg		
1	2483.500	56.70	64.79	-8.09	74.00	-17.30	114	142	Peak	
2	2500.000	50.58	58.67	-8.09	74.00	-23.42	114	142	Peak	
3	2688.237	49.11	56.89	-7.78	74.00	-24.89	114	142	Peak	

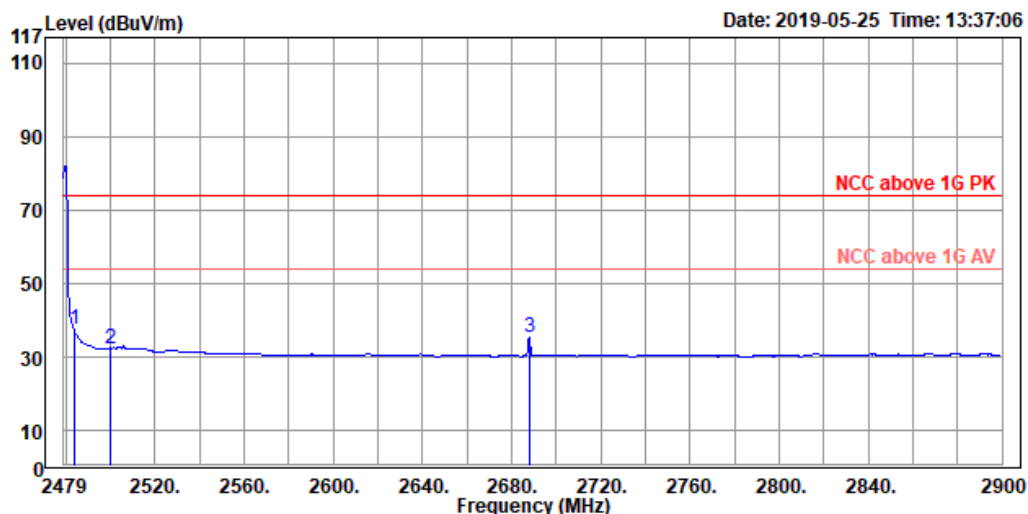

Site : 966A Chamber A
Condition : NCC above 1G PK 3m Vertical
Test Engineer: Curry Chen
Product : Wii/Wii-U/SW/PS4 to SW/P4 controller adapter
Model No. : ZPPA00G
Test Rating : DC 5V
Tmp/Hum : 22°C/63%
Power Setting: 15
Mode : BT 1DH5 TX 2480
Memo : Z

	Freq	Level	Read	Limit	Over	APos	TPos	Remark	Note
	MHz	dBuV/m	Level	Factor	Line	Limit	cm	deg	
			dBuV	dB/m	dBuV/m	dB			
1	2483.500	37.24	45.33	-8.09	54.00	-16.76	100	58 Average	
2	2500.000	32.17	40.26	-8.09	54.00	-21.83	100	58 Average	
3	2687.816	35.05	42.83	-7.78	54.00	-18.95	100	58 Average	

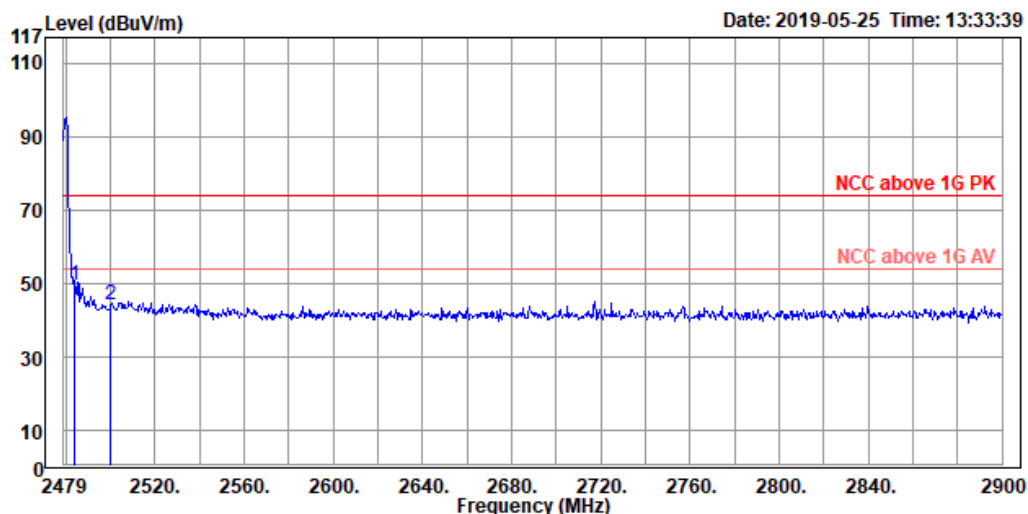


Site : 966A Chamber A
Condition : NCC above 1G PK 3m Vertical
Test Engineer: Curry Chen
Product : Wii/Wii-U/SW/PS4 to SW/P4 controller adapter
Model No. : ZPPA00G
Test Rating : DC 5V
Tmp/Hum : 22°C/63%
Power Setting: 15
Mode : BT 1DH5 TX 2480
Memo : Z

	Freq	Level	Read Level	Factor	Limit Line	Over Limit	APos	TPos	Remark	Note
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg		
1	2483.500	49.54	57.63	-8.09	74.00	-24.46	100		58 Peak	
2	2500.000	44.09	52.18	-8.09	74.00	-29.91	100		58 Peak	

Radiated Bandedge (8DPSK), Low Channel




TUV Rheinland Taiwan Ltd.
11F., No. 758, Sec. 4 Bade Road. Songshan Dist, Taipei City 105
Tel:+886-2172-7000 Fax:+886-2528-0018

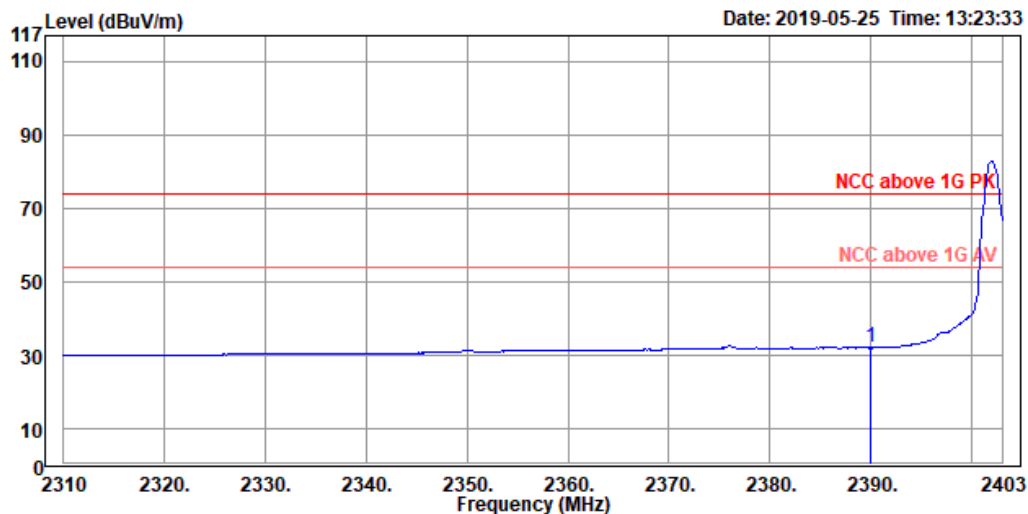


Site : 966A Chamber A
Condition : NCC above 1G PK 3m Horizontal
Test Engineer: Curry Chen
Product : Wii/Wii-U/SW/PS4 to SW/P4 controller adapter
Model No. : ZPPA00G
Test Rating : DC 5V
Tmp/Hum : 22°C/63%
Power Setting: 15
Mode : BT 3DH5 TX 2402
Memo : Z

	Freq	Level	Read Level	Factor	Limit Line	Over Limit	APos	TPos	Remark	Note
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg		
1	2390.000	31.81	39.91	-8.10	54.00	-22.19	126	184	Average	

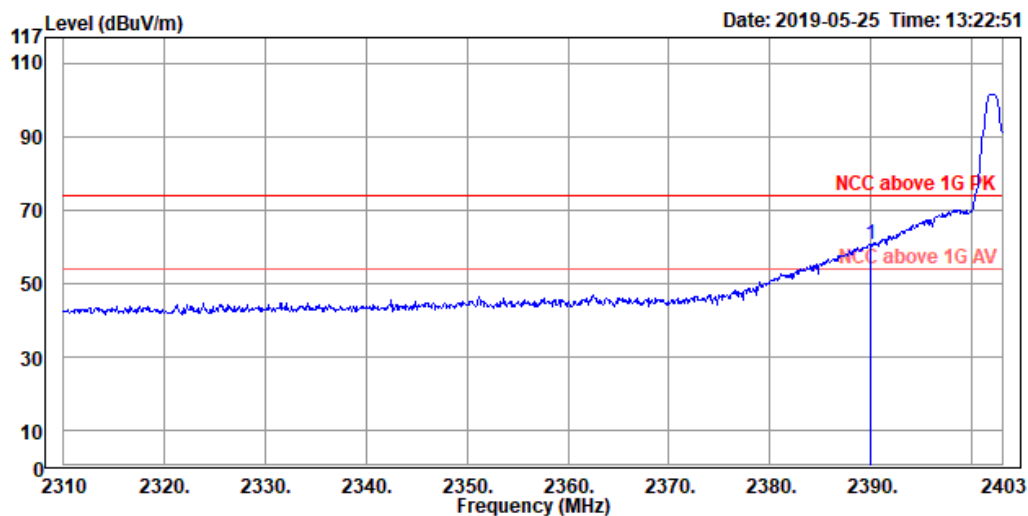


Site : 966A Chamber A
 Condition : NCC above 1G PK 3m Horizontal
 Test Engineer: Curry Chen
 Product : Wii/Wii-U/SW/PS4 to SW/P4 controller adapter
 Model No. : ZPPA00G
 Test Rating : DC 5V
 Tmp/Hum : 22°C/63%
 Power Setting: 15
 Mode : BT 3DH5 TX 2402
 Memo : Z

	Freq	Level	Read Level	Factor	Limit Line	Over Limit	APos	TPos	Remark	Note
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg		
1	2390.000	60.32	68.42	-8.10	74.00	-13.68	126	184	Peak	

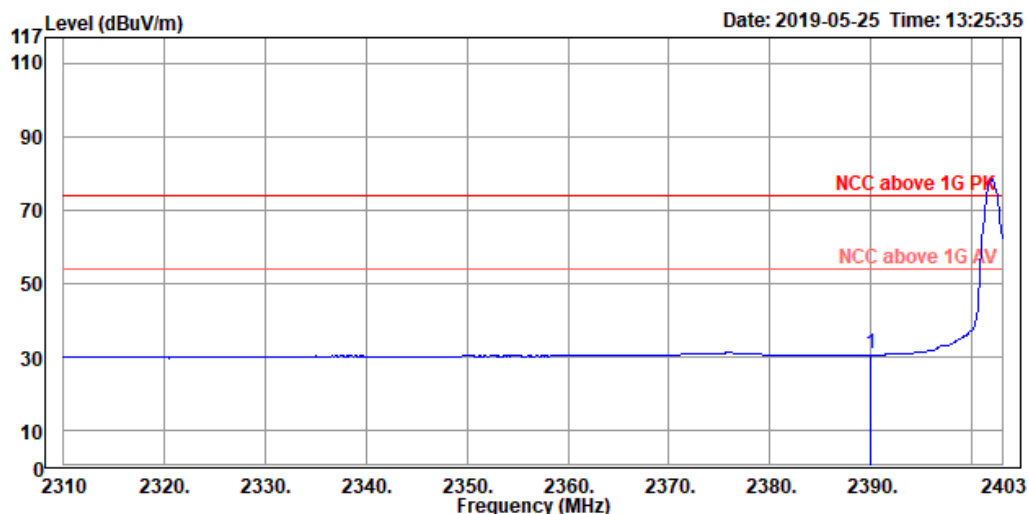

Site : 966A Chamber A
Condition : NCC above 1G PK 3m Vertical
Test Engineer: Curry Chen
Product : Wii/Wii-U/SW/PS4 to SW/P4 controller adapter
Model No. : ZPPA00G
Test Rating : DC 5V
Tmp/Hum : 22°C/63%
Power Setting: 15
Mode : BT 3DH5 TX 2402
Memo : Z

	Freq	Level	Read Level	Factor	Limit Line	Over Limit	APos	TPos	Remark	Note
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg		
1	2390.000	30.86	38.96	-8.10	54.00	-23.14	115	61	Average	

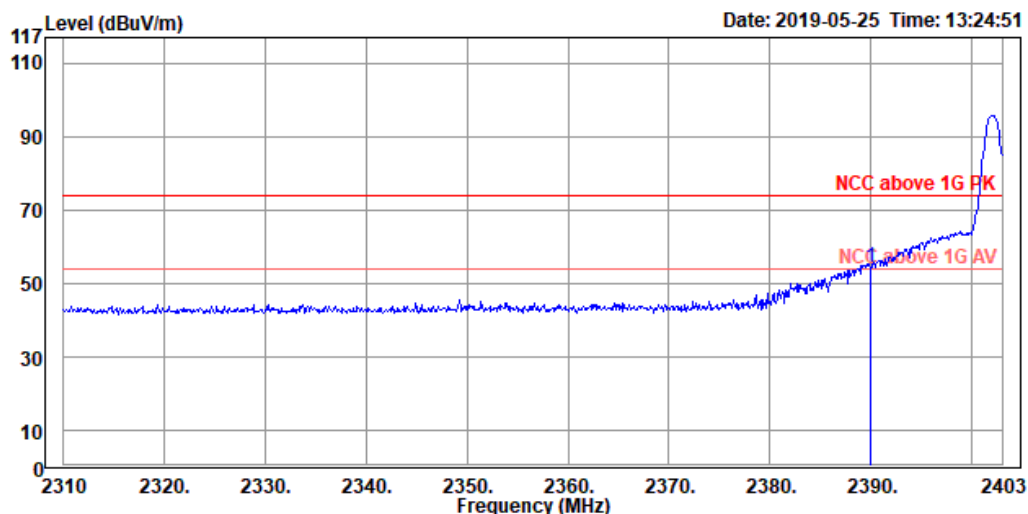


Site : 966A Chamber A
Condition : NCC above 1G PK 3m Vertical
Test Engineer: Curry Chen
Product : Wii/Wii-U/SW/PS4 to SW/P4 controller adapter
Model No. : ZPPA00G
Test Rating : DC 5V
Tmp/Hum : 22°C/63%
Power Setting: 15
Mode : BT 3DH5 TX 2402
Memo : Z

	Freq	Level	Read Level	Factor	Limit Line	Over Limit	APos	TPos	Remark	Note
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg		
1	2390.000	54.45	62.55	-8.10	74.00	-19.55	115	61	Peak	

Radiated Bandedge (8DPSK), High Channel




TUV Rheinland Taiwan Ltd.
11F., No. 758, Sec. 4 Bade Road. Songshan Dist, Taipei City 105
Tel: +886-2172-7000 Fax: +886-2528-0018

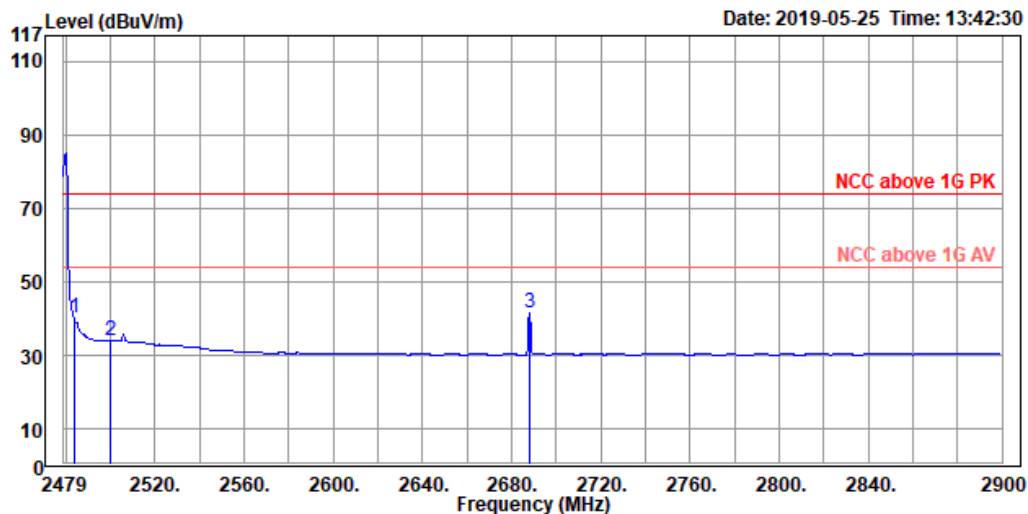


Site : 966A Chamber A
Condition : NCC above 1G PK 3m Horizontal
Test Engineer: Curry Chen
Product : Wii/Wii-U/SW/PS4 to SW/P4 controller adapter
Model No. : ZPPA00G
Test Rating : DC 5V
Tmp/Hum : 22°C/63%
Power Setting: 15
Mode : BT 3DH5 TX 2480
Memo : Z

	Freq	Level	Read Level	Factor	Limit Line	Over Limit	APos	TPos	Remark	Note
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg		
1	2483.500	40.10	48.19	-8.09	54.00	-13.90	114	137	Average	
2	2500.000	33.86	41.95	-8.09	54.00	-20.14	114	137	Average	
3	2687.816	41.31	49.09	-7.78	54.00	-12.69	114	137	Average	

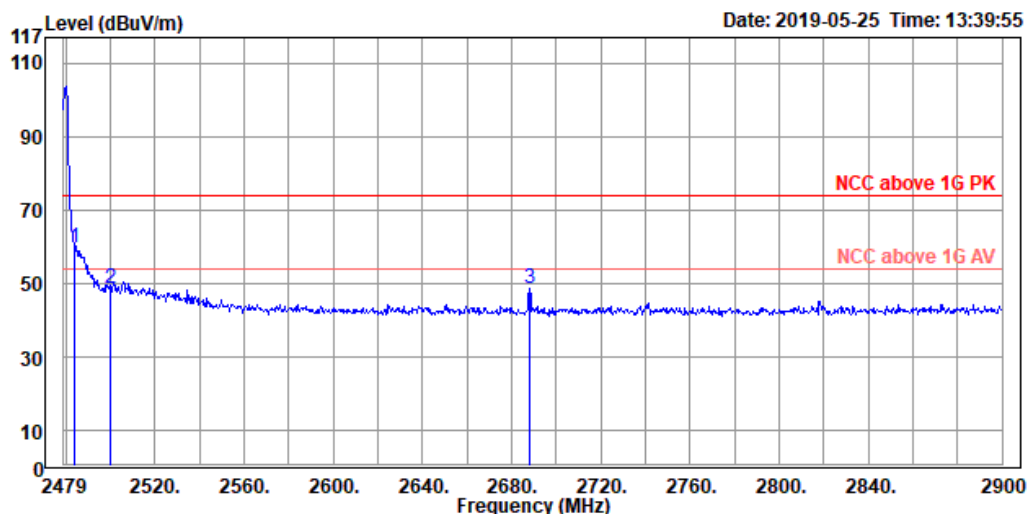


Site : 966A Chamber A
Condition : NCC above 1G PK 3m Horizontal
Test Engineer: Curry Chen
Product : Wii/Wii-U/SW/PS4 to SW/P4 controller adapter
Model No. : ZPPA00G
Test Rating : DC 5V
Tmp/Hum : 22°C/63%
Power Setting: 15
Mode : BT 3DH5 TX 2480
Memo : Z

	Freq	Level	Read Level	Factor	Limit Line	Over Limit	APos	TPos	Remark	Note
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg		
1	2483.500	59.59	67.68	-8.09	74.00	-14.41	114	137	Peak	
2	2500.000	48.44	56.53	-8.09	74.00	-25.56	114	137	Peak	
3	2688.237	48.47	56.25	-7.78	74.00	-25.53	114	137	Peak	

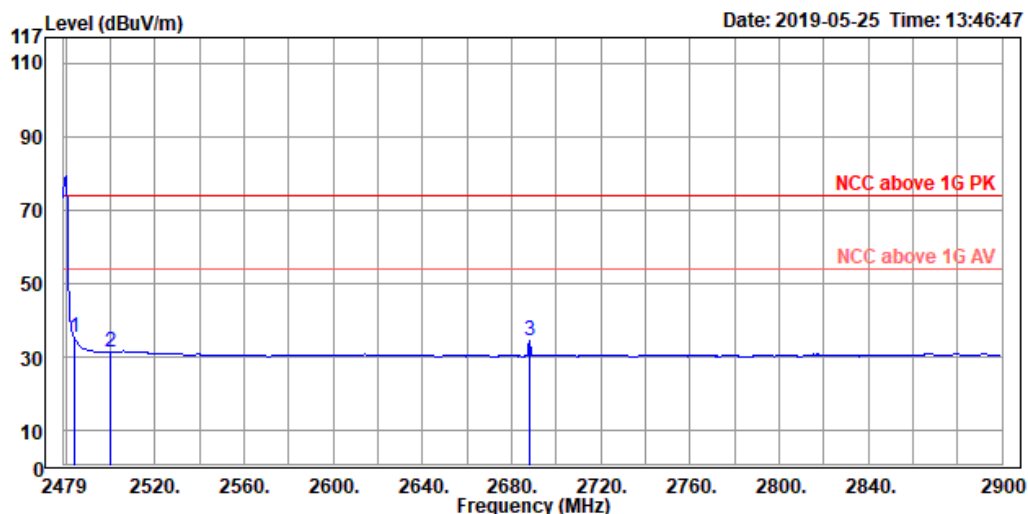

Site : 966A Chamber A
Condition : NCC above 1G PK 3m Vertical
Test Engineer: Curry Chen
Product : Wii/Wii-U/SW/PS4 to SW/P4 controller adapter
Model No. : ZPPA00G
Test Rating : DC 5V
Tmp/Hum : 22°C/63%
Power Setting: 15
Mode : BT 3DH5 TX 2480
Memo : Z

	Freq	Level	Read Level	Factor	Limit Line	Over Limit	APos	TPos	Remark	Note
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg		
1	2483.500	35.21	43.30	-8.09	54.00	-18.79	100	65	Average	
2	2500.000	31.26	39.35	-8.09	54.00	-22.74	100	65	Average	
3	2687.816	34.20	41.98	-7.78	54.00	-19.80	100	65	Average	

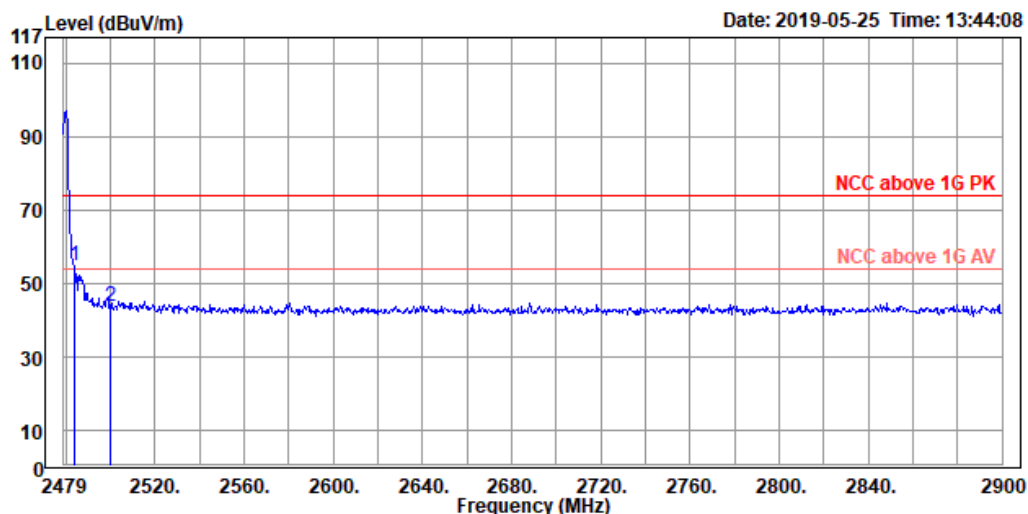


Site : 966A Chamber A
Condition : NCC above 1G PK 3m Vertical
Test Engineer: Curry Chen
Product : Wii/Wii-U/SW/PS4 to SW/P4 controller adapter
Model No. : ZPPA00G
Test Rating : DC 5V
Tmp/Hum : 22°C/63%
Power Setting: 15
Mode : BT 3DH5 TX 2480
Memo : Z

	Freq	Level	Read Level	Factor	Limit Line	Over Limit	APos	TPos	Remark	Note
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg		
1	2483.500	54.55	62.64	-8.09	74.00	-19.45	100	65	Peak	
2	2500.000	43.54	51.63	-8.09	74.00	-30.46	100	65	Peak	

Spurious Emissions, TX Mode, 1-18G




TUV Rheinland Taiwan Ltd.
11F., No. 758, Sec. 4 Bade Road, Songshan Dist, Taipei City 105
Tel: +886-2172-7000 Fax: +886-2528-0018

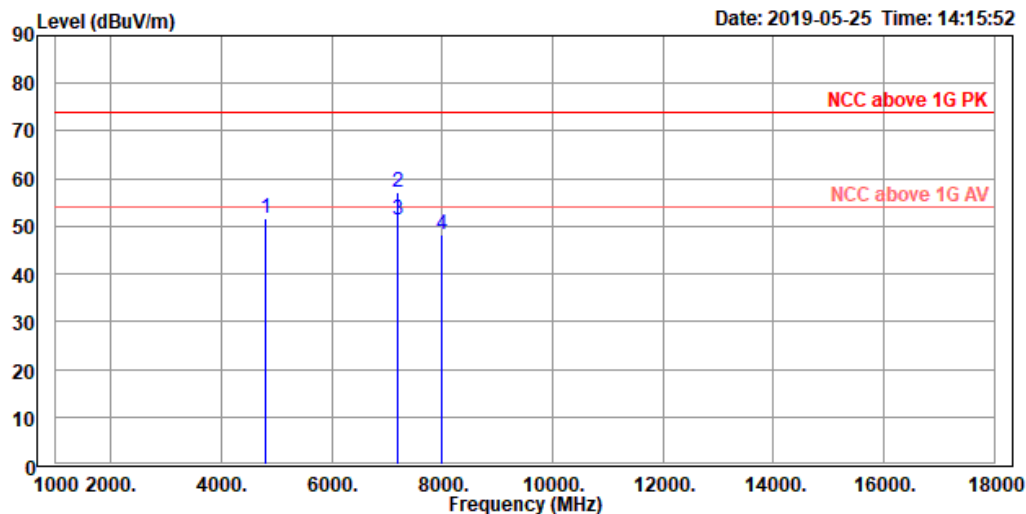


Site : 966A Chamber A
Condition : NCC above 1G PK 3m horizontal
Test Engineer: Curry Chen
Product : Wii/Wii-U/SW/PS4 to SW/P4 controller adapter
Model No. : ZPPA00G
Test Rating : DC 5V
Tmp/Hum : 22°C/63%
Power Setting: 15
Mode : BT 1DH5 TX 2402
Memo : Z

	Freq	Level	Read Level	Factor	Limit Line	Over Limit	APos	TPos	Remark	Note
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg		
1	4804.000	51.53	54.17	-2.64	74.00	-22.47	100	260	Peak	
2	7206.000	57.10	51.84	5.26	74.00	-16.90	143	205	Peak	
3	7206.000	51.18	45.92	5.26	54.00	-2.82	143	205	Average	
4	7987.000	48.30	42.57	5.73	74.00	-25.70	100	245	Peak	

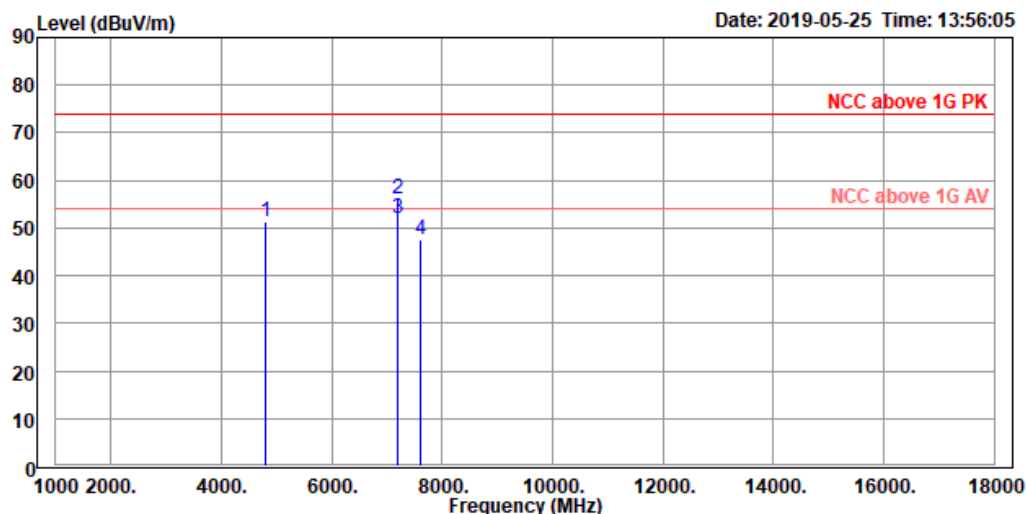


Site : 966A Chamber A
Condition : NCC above 1G PK 3m vertical
Test Engineer: Curry Chen
Product : Wii/Wii-U/SW/PS4 to SW/P4 controller adapter
Model No. : ZPPA00G
Test Rating : DC 5V
Tmp/Hum : 22°C/63%
Power Setting: 15
Mode : BT 1DH5 TX 2402
Memo : Z

	Freq	Level	Read Level	Factor	Limit Line	Over Limit	APos	TPos	Remark	Note
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg		
1	4804.000	51.34	53.98	-2.64	74.00	-22.66	100	209	Peak	
2	7206.000	56.15	50.89	5.26	74.00	-17.85	100	212	Peak	
3	7206.000	51.89	46.63	5.26	54.00	-2.11	100	212	Average	
4	7613.000	47.40	41.49	5.91	74.00	-26.60	100	57	Peak	

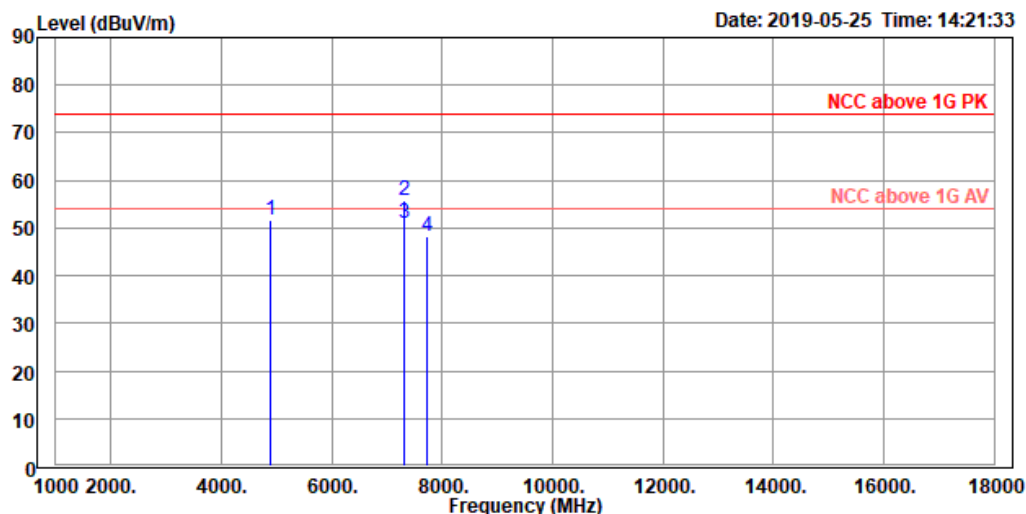


Site : 966A Chamber A
Condition : NCC above 1G PK 3m horizontal
Test Engineer: Curry Chen
Product : Wii/Wii-U/SW/PS4 to SW/P4 controller adapter
Model No. : ZPPA00G
Test Rating : DC 5V
Tmp/Hum : 22°C/63%
Power Setting: 15
Mode : BT 1DH5 TX 2441
Memo : Z

	Freq	Level	Read Level	Factor	Limit Line	Over Limit	APos	TPos	Remark	Note
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg		
1	4882.000	51.51	53.96	-2.45	74.00	-22.49	100	275	Peak	
2	7323.000	55.84	50.30	5.54	74.00	-18.16	140	360	Peak	
3	7323.000	50.88	45.34	5.54	54.00	-3.12	140	360	Average	
4	7715.000	48.29	42.43	5.86	74.00	-25.71	100	37	Peak	

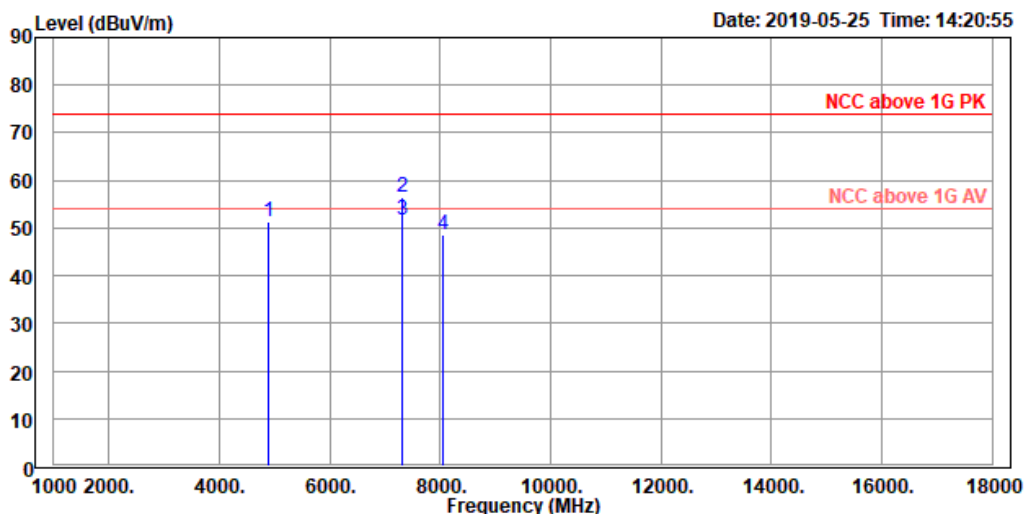


Site : 966A Chamber A
Condition : NCC above 1G PK 3m vertical
Test Engineer: Curry Chen
Product : Wii/Wii-U/SW/PS4 to SW/P4 controller adapter
Model No. : ZPPA00G
Test Rating : DC 5V
Tmp/Hum : 22°C/63%
Power Setting: 15
Mode : BT 1DH5 TX 2441
Memo : Z

	Freq	Level	Read Level	Factor	Limit Line	Over Limit	APos	TPos	Remark	Note
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg		
1	4882.000	51.43	53.88	-2.45	74.00	-22.57	100	227	Peak	
2	7323.000	56.33	50.79	5.54	74.00	-17.67	100	250	Peak	
3	7323.000	51.66	46.12	5.54	54.00	-2.34	100	250	Average	
4	8055.000	48.53	42.72	5.81	74.00	-25.47	100	162	Peak	

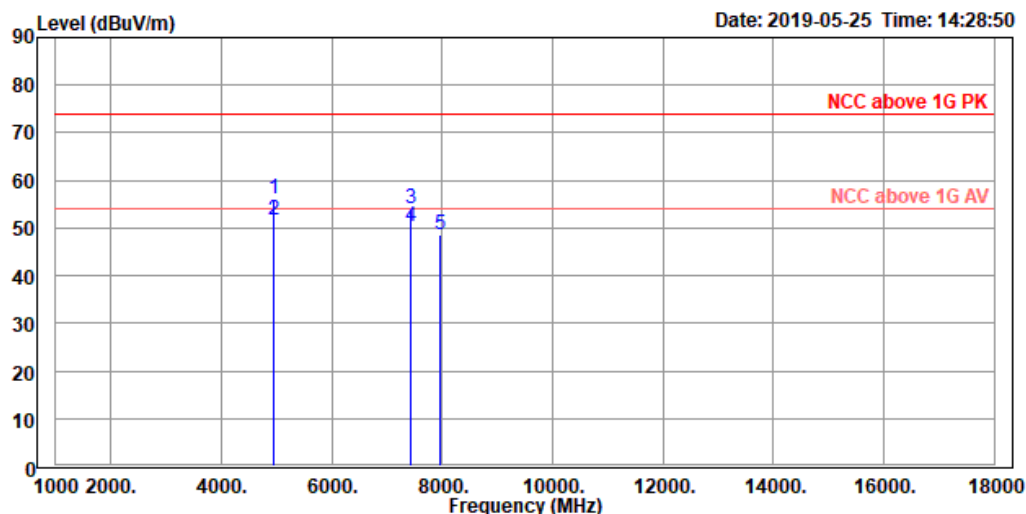


Site : 966A Chamber A
Condition : NCC above 1G PK 3m horizontal
Test Engineer: Curry Chen
Product : Wii/Wii-U/SW/PS4 to SW/P4 controller adapter
Model No. : ZPPA00G
Test Rating : DC 5V
Tmp/Hum : 22°C/63%
Power Setting: 15
Mode : BT 1DH5 TX 2480
Memo : Z

	Freq	Level	Read Level	Factor	Limit Line	Over Limit	APos	TPos	Remark	Note
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg		
1	4960.000	56.24	58.49	-2.25	74.00	-17.76	150	302	Peak	
2	4960.000	51.83	54.08	-2.25	54.00	-2.17	150	302	Average	
3	7440.000	54.13	48.30	5.83	74.00	-19.87	135	1	Peak	
4	7440.000	50.32	44.49	5.83	54.00	-3.68	135	1	Average	
5	7953.000	48.70	42.95	5.75	74.00	-25.30	100	343	Peak	

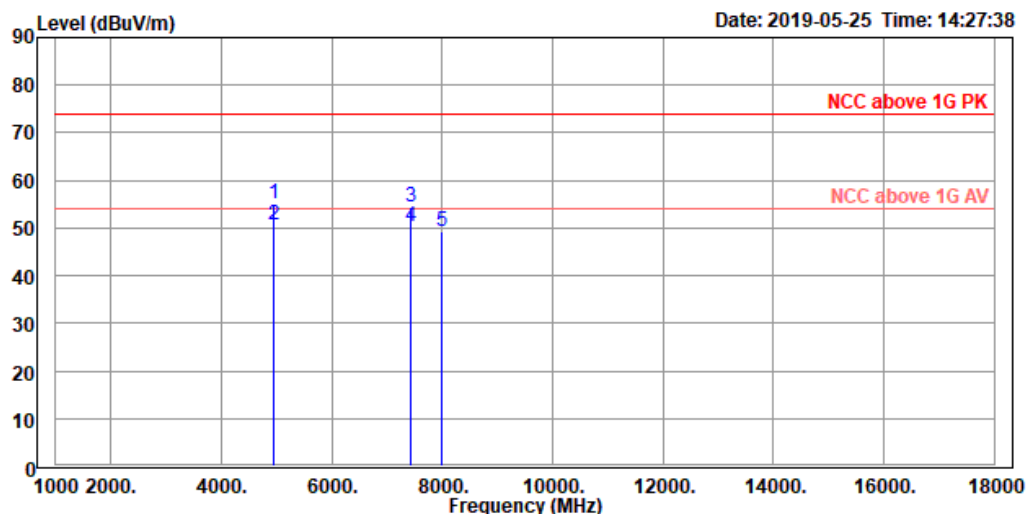


Site : 966A Chamber A
Condition : NCC above 1G PK 3m vertical
Test Engineer: Curry Chen
Product : Wii/Wii-U/SW/PS4 to SW/P4 controller adapter
Model No. : ZPPA00G
Test Rating : DC 5V
Tmp/Hum : 22°C/63%
Power Setting: 15
Mode : BT 1DH5 TX 2480
Memo : Z

	Freq	Level	Read Level	Factor	Limit Line	Over Limit	APos	TPos	Remark	Note
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg		
1	4960.000	55.14	57.39	-2.25	74.00	-18.86	100	213	Peak	
2	4960.000	50.71	52.96	-2.25	54.00	-3.29	100	213	Average	
3	7440.000	54.49	48.66	5.83	74.00	-19.51	100	360	Peak	
4	7440.000	50.27	44.44	5.83	54.00	-3.73	100	360	Average	
5	7987.000	49.19	43.46	5.73	74.00	-24.81	100	135	Peak	

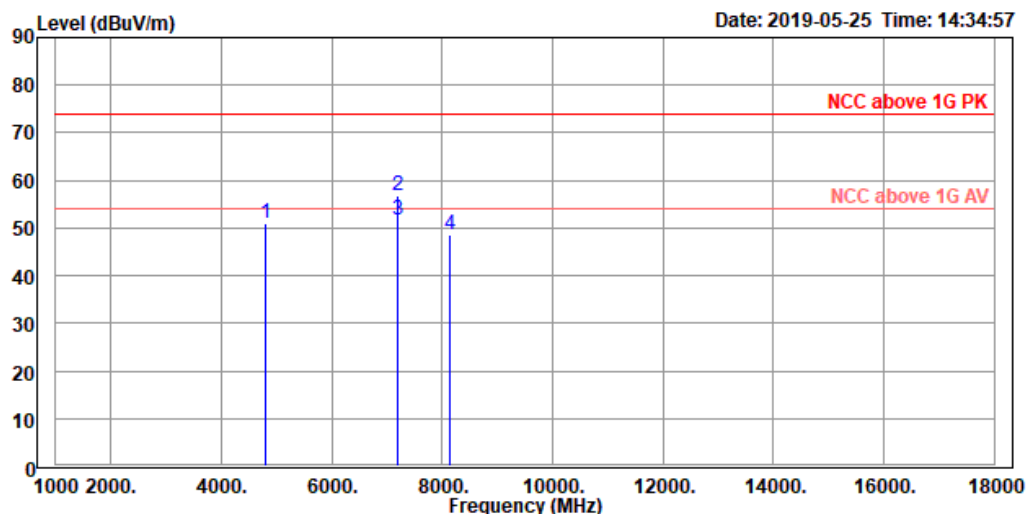


Site : 966A Chamber A
Condition : NCC above 1G PK 3m horizontal
Test Engineer: Curry Chen
Product : Wii/Wii-U/SW/PS4 to SW/P4 controller adapter
Model No. : ZPPA00G
Test Rating : DC 5V
Tmp/Hum : 22°C/63%
Power Setting: 15
Mode : BT 3DH5 TX 2402
Memo : Z

	Freq	Level	Read Level	Factor	Limit Line	Over Limit	APos	TPos	Remark	Note
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg		
1	4804.000	51.03	53.67	-2.64	74.00	-22.97	100	30	Peak	
2	7206.000	56.80	51.54	5.26	74.00	-17.20	135	350	Peak	
3	7206.000	51.65	46.39	5.26	54.00	-2.35	135	350	Average	
4	8140.000	48.71	42.74	5.97	74.00	-25.29	100	326	Peak	

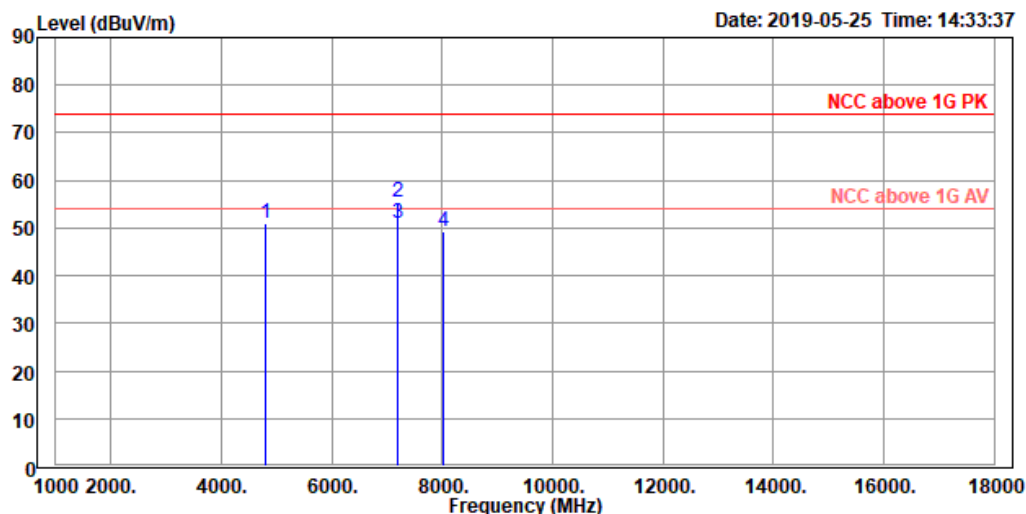


Site : 966A Chamber A
Condition : NCC above 1G PK 3m vertical
Test Engineer: Curry Chen
Product : Wii/Wii-U/SW/PS4 to SW/P4 controller adapter
Model No. : ZPPA00G
Test Rating : DC 5V
Tmp/Hum : 22°C/63%
Power Setting: 15
Mode : BT 3DH5 TX 2402
Memo : Z

	Freq	Level	Read Level	Factor	Limit Line	Over Limit	APos	TPos	Remark	Note
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg		
1	4804.000	50.84	53.48	-2.64	74.00	-23.16	100	133	Peak	
2	7206.000	55.44	50.18	5.26	74.00	-18.56	100	210	Peak	
3	7206.000	50.85	45.59	5.26	54.00	-3.15	100	210	Average	
4	8021.000	49.19	43.44	5.75	74.00	-24.81	100	217	Peak	

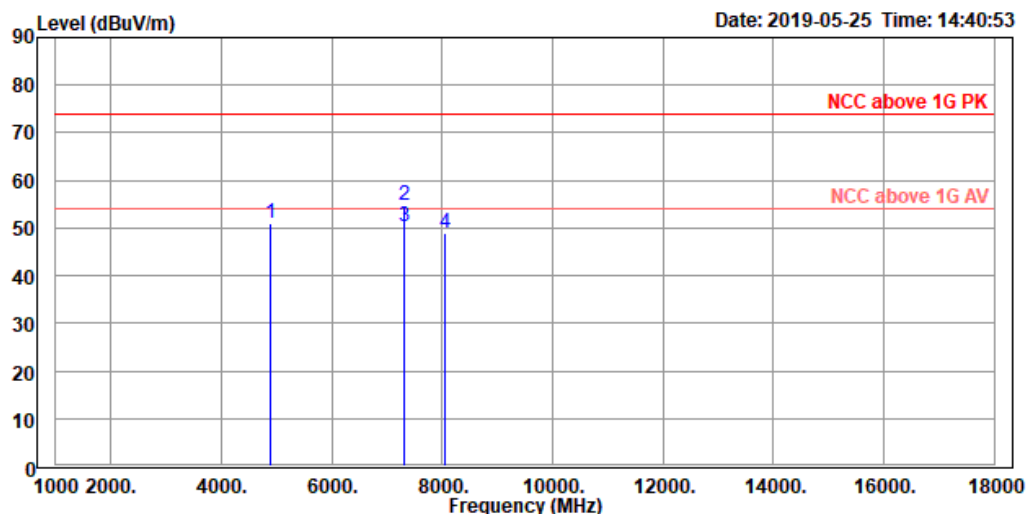


Site : 966A Chamber A
Condition : NCC above 1G PK 3m horizontal
Test Engineer: Curry Chen
Product : Wii/Wii-U/SW/PS4 to SW/P4 controller adapter
Model No. : ZPPA00G
Test Rating : DC 5V
Tmp/Hum : 22°C/63%
Power Setting: 15
Mode : BT 3DH5 TX 2441
Memo : Z

	Freq	Level	Read Level	Factor	Limit Line	Over Limit	APos	TPos	Remark	Note
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg		
1	4882.000	51.02	53.47	-2.45	74.00	-22.98	100	257	Peak	
2	7323.000	54.81	49.27	5.54	74.00	-19.19	141	0	Peak	
3	7323.000	50.14	44.60	5.54	54.00	-3.86	141	0	Average	
4	8038.000	48.84	43.05	5.79	74.00	-25.16	100	273	Peak	

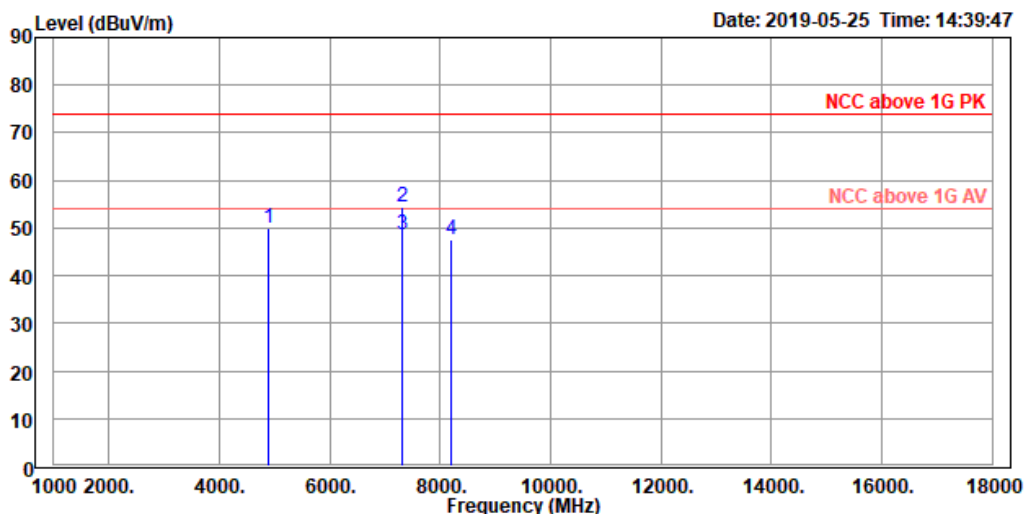


Site : 966A Chamber A
Condition : NCC above 1G PK 3m vertical
Test Engineer: Curry Chen
Product : Wii/Wii-U/SW/PS4 to SW/P4 controller adapter
Model No. : ZPPA00G
Test Rating : DC 5V
Tmp/Hum : 22°C/63%
Power Setting: 15
Mode : BT 3DH5 TX 2441
Memo : Z

	Freq	Level	Read Level	Factor	Limit Line	Over Limit	APos	TPos	Remark	Note
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg		
1	4882.000	49.94	52.39	-2.45	74.00	-24.06	100	211	Peak	
2	7323.000	54.41	48.87	5.54	74.00	-19.59	100	249	Peak	
3	7323.000	48.74	43.20	5.54	54.00	-5.26	100	249	Average	
4	8191.000	47.66	41.60	6.06	74.00	-26.34	100	101	Peak	

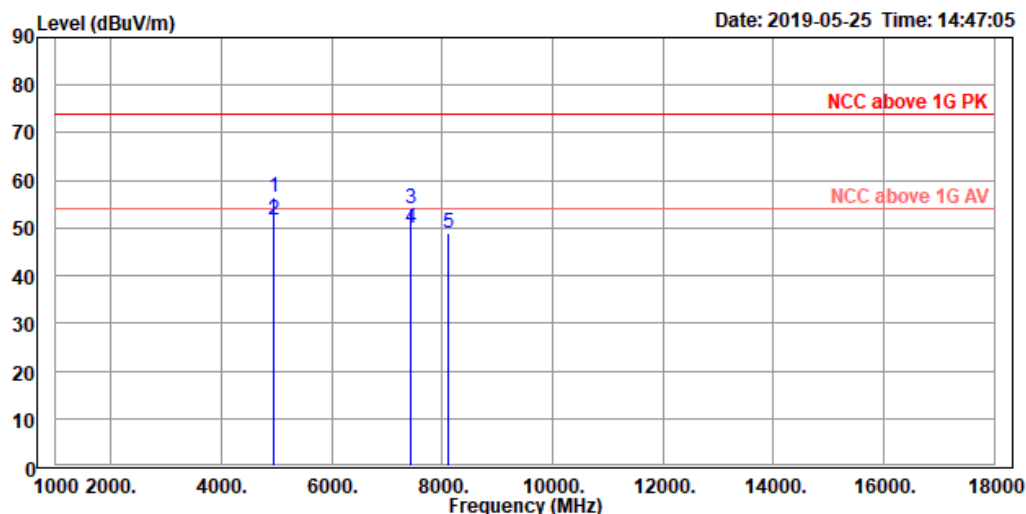

Site : 966A Chamber A
Condition : NCC above 1G PK 3m horizontal
Test Engineer: Curry Chen
Product : Wii/Wii-U/SW/PS4 to SW/P4 controller adapter
Model No. : ZPPA00G
Test Rating : DC 5V
Tmp/Hum : 22°C/63%
Power Setting: 15
Mode : BT 3DH5 TX 2480
Memo : Z

	Freq	Level	Read Level	Factor	Limit Line	Over Limit	APos	TPos	Remark	Note
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg		
1	4960.000	56.46	58.71	-2.25	74.00	-17.54	120	301	Peak	
2	4960.000	51.78	54.03	-2.25	54.00	-2.22	120	301	Average	
3	7440.000	53.91	48.08	5.83	74.00	-20.09	139	331	Peak	
4	7440.000	50.05	44.22	5.83	54.00	-3.95	139	331	Average	
5	8106.000	49.07	43.16	5.91	74.00	-24.93	100	277	Peak	

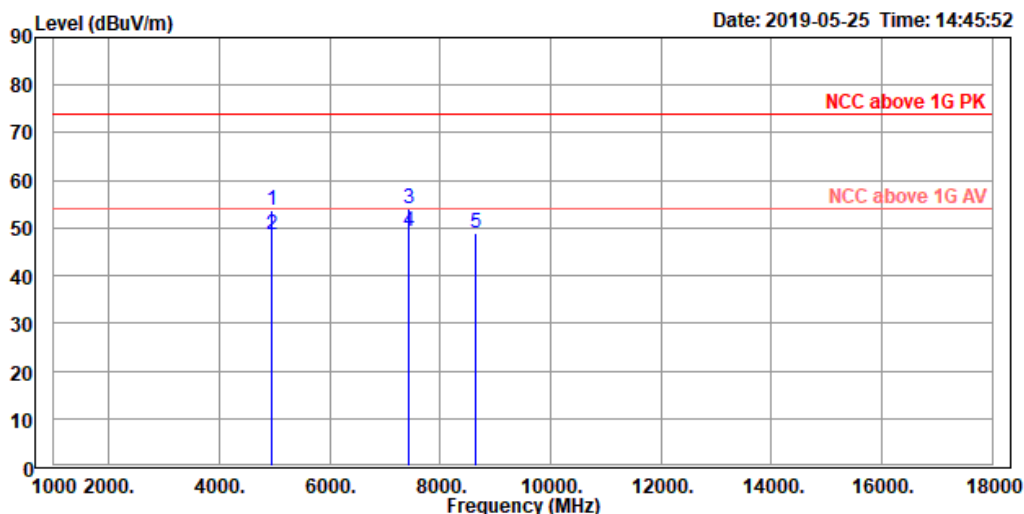


Site : 966A Chamber A
Condition : NCC above 1G PK 3m vertical
Test Engineer: Curry Chen
Product : Wii/Wii-U/SW/PS4 to SW/P4 controller adapter
Model No. : ZPPA00G
Test Rating : DC 5V
Tmp/Hum : 22°C/63%
Power Setting: 15
Mode : BT 3DH5 TX 2480
Memo : Z

	Freq	Level	Read Level	Factor	Limit Line	Over Limit	APos	TPos	Remark	Note
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg		
1	4960.000	53.65	55.90	-2.25	74.00	-20.35	100	215	Peak	
2	4960.000	48.50	50.75	-2.25	54.00	-5.50	100	215	Average	
3	7440.000	54.18	48.35	5.83	74.00	-19.82	100	356	Peak	
4	7440.000	49.35	43.52	5.83	54.00	-4.65	100	356	Average	
5	8633.000	48.90	42.29	6.61	74.00	-25.10	100	155	Peak	

Spurious Emissions, TX Mode, 18-26G




TUV Rheinland Taiwan Ltd.
11F., No. 758, Sec. 4 Bade Road. Songshan Dist, Taipei City 105
Tel:+886-2172-7000 Fax:+886-2528-0018

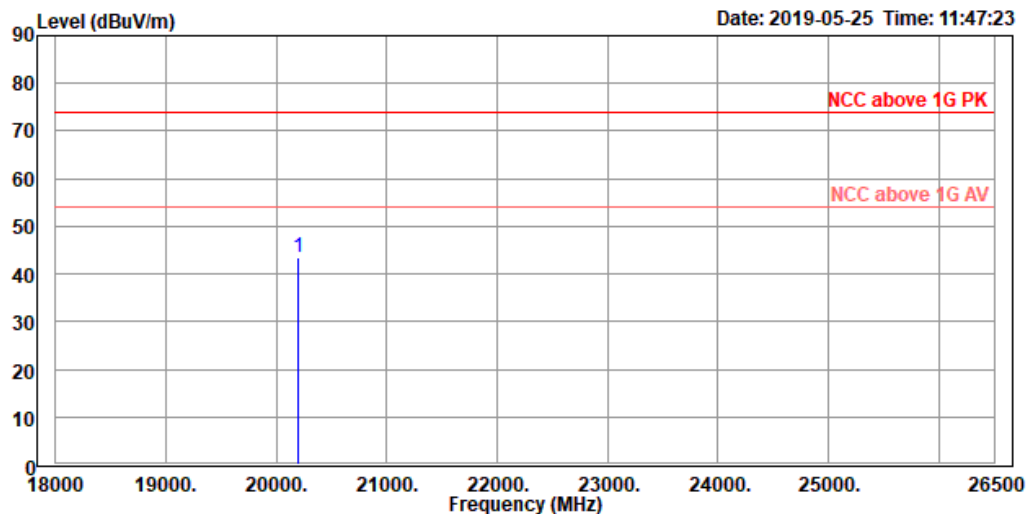


Site : 966A Chamber A
Condition : NCC above 1G PK 3m Horizontal
Test Engineer: Curry Chen
Product : Wii/Wii-U/SW/PS4 to SW/P4 controller adapter
Model No. : ZPPA00G
Test Rating : DC 5V
Tmp/Hum : 22°C/63%
Power Setting: 15
Mode : BT 1DH5 TX 2402
Memo : Z

	Freq	Level	Read Level	Factor	Limit Line	Over Limit	APos	TPos	Remark	Note
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg		
1	20193.000	43.46	39.09	4.37	74.00	-30.54	100	15	Peak	

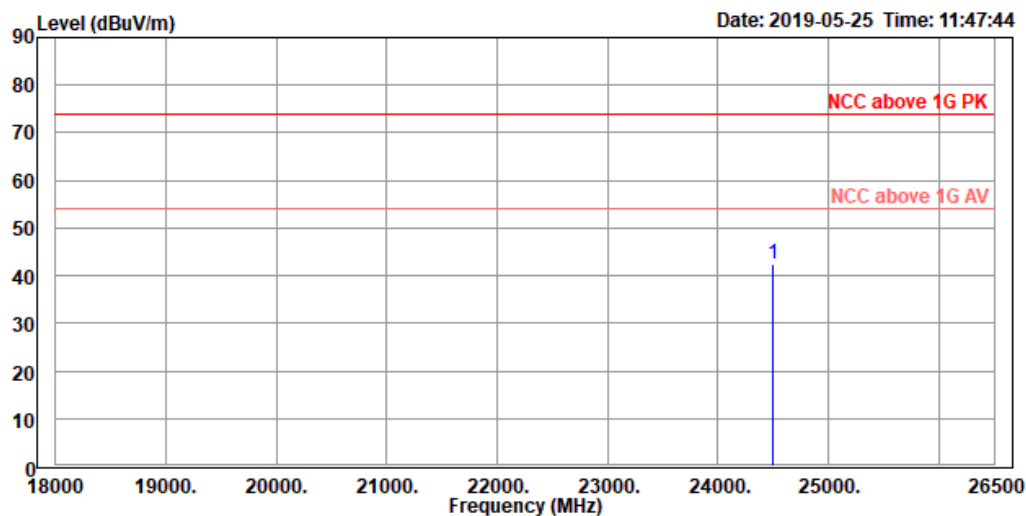


Site : 966A Chamber A
Condition : NCC above 1G PK 3m Vertical
Test Engineer: Curry Chen
Product : Wii/Wii-U/SW/PS4 to SW/P4 controller adapter
Model No. : ZPPA00G
Test Rating : DC 5V
Tmp/Hum : 22°C/63%
Power Setting: 15
Mode : BT 1DH5 TX 2402
Memo : Z

	Freq	Level	Read Level	Factor	Limit Line	Over Limit	APos	TPos	Remark	Note
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg		
1	24502.500	42.32	37.19	5.13	74.00	-31.68	100	265	Peak	

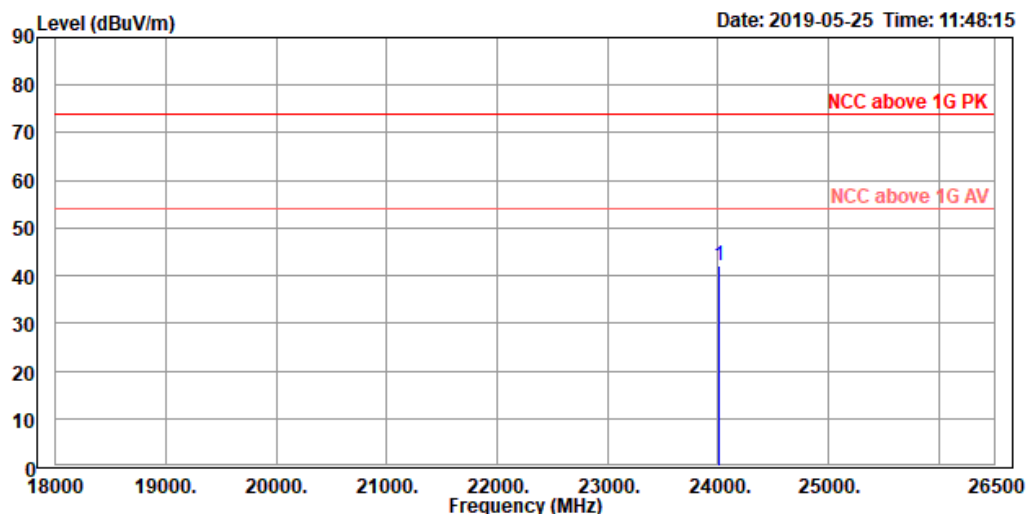


Site : 966A Chamber A
Condition : NCC above 1G PK 3m Horizontal
Test Engineer: Curry Chen
Product : Wii/Wii-U/SW/PS4 to SW/P4 controller adapter
Model No. : ZPPA00G
Test Rating : DC 5V
Tmp/Hum : 22°C/63%
Power Setting: 15
Mode : BT 1DH5 TX 2441
Memo : Z

	Freq	Level	Read Level	Factor	Limit Line	Over Limit	APos	TPos	Remark	Note
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg		
1	24009.500	42.16	36.82	5.34	74.00	-31.84	100	98	Peak	

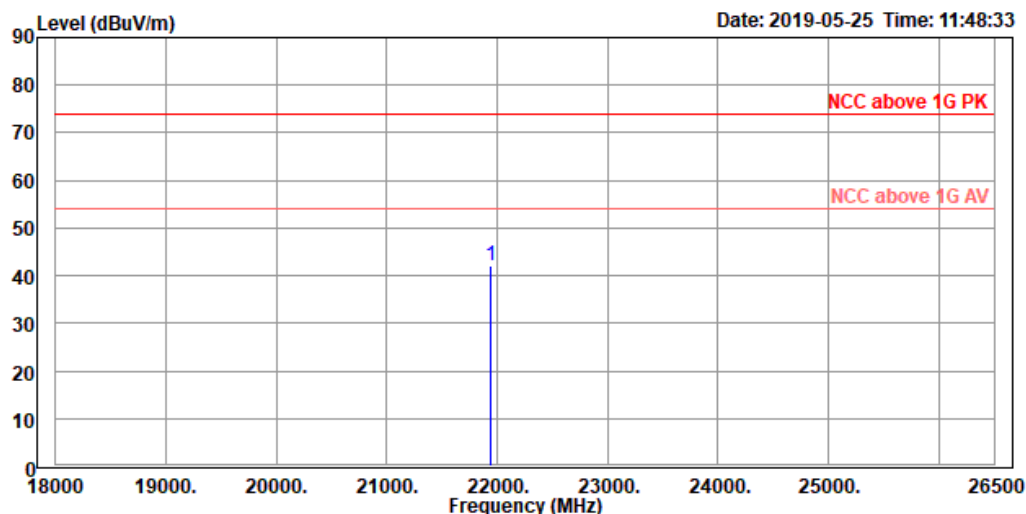


Site : 966A Chamber A
Condition : NCC above 1G PK 3m Vertical
Test Engineer: Curry Chen
Product : Wii/Wii-U/SW/PS4 to SW/P4 controller adapter
Model No. : ZPPA00G
Test Rating : DC 5V
Tmp/Hum : 22°C/63%
Power Setting: 15
Mode : BT 1DH5 TX 2441
Memo : Z

	Freq	Level	Read Level	Factor	Limit Line	Over Limit	APos	TPos	Remark	Note
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg		
1	21935.500	42.19	37.83	4.36	74.00	-31.81	100	212	Peak	

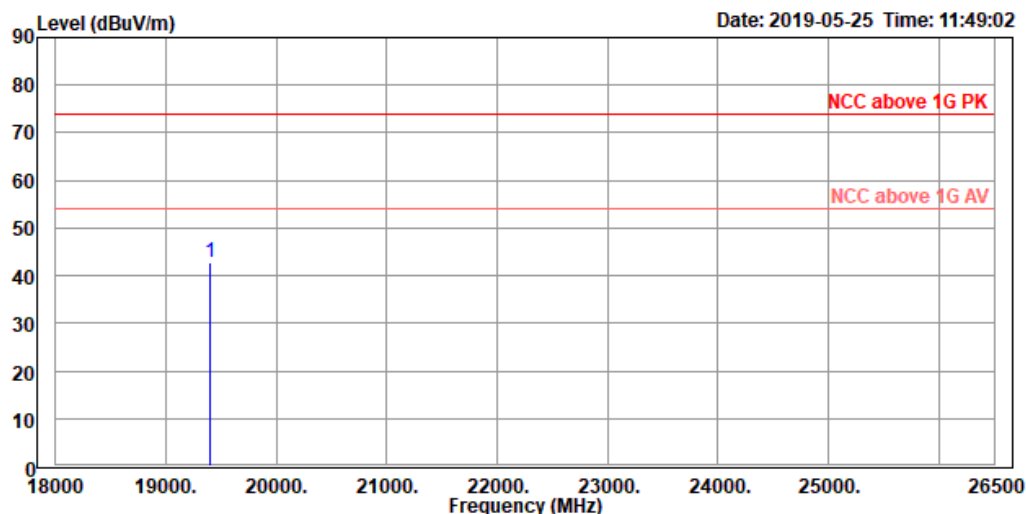


Site : 966A Chamber A
Condition : NCC above 1G PK 3m Horizontal
Test Engineer: Curry Chen
Product : Wii/Wii-U/SW/PS4 to SW/P4 controller adapter
Model No. : ZPPA00G
Test Rating : DC 5V
Tmp/Hum : 22°C/63%
Power Setting: 15
Mode : BT 1DH5 TX 2480
Memo : Z

	Freq	Level	Read Level	Factor	Limit Line	Over Limit	APos	TPos	Remark	Note
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg		
1	19402.500	42.89	39.09	3.80	74.00	-31.11	100	153	Peak	

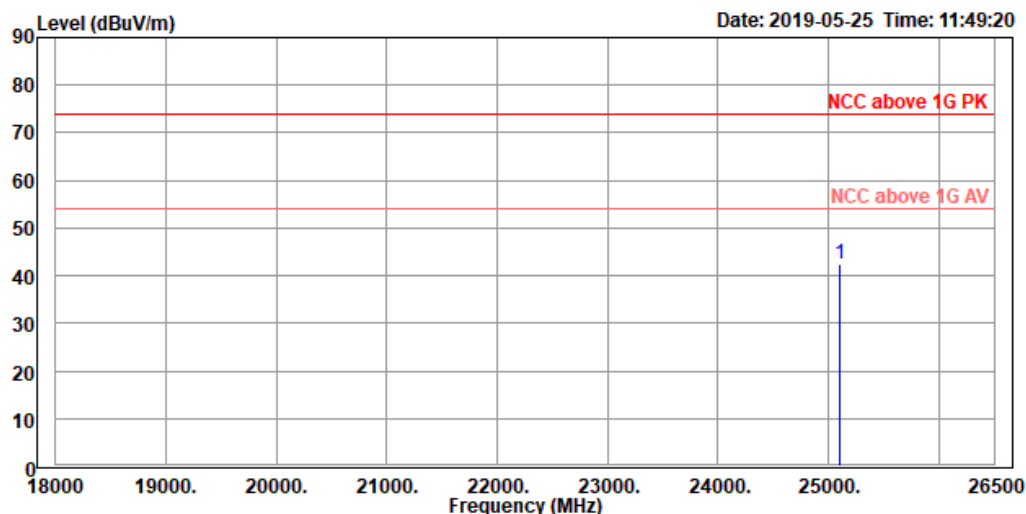


Site : 966A Chamber A
Condition : NCC above 1G PK 3m Vertical
Test Engineer: Curry Chen
Product : Wii/Wii-U/SW/PS4 to SW/P4 controller adapter
Model No. : ZPPA00G
Test Rating : DC 5V
Tmp/Hum : 22°C/63%
Power Setting: 15
Mode : BT 1DH5 TX 2480
Memo : Z

	Freq	Level	Read Level	Factor	Limit Line	Over Limit	APos	TPos	Remark	Note
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg		
1	25097.500	42.52	37.32	5.20	74.00	-31.48	100	355	Peak	

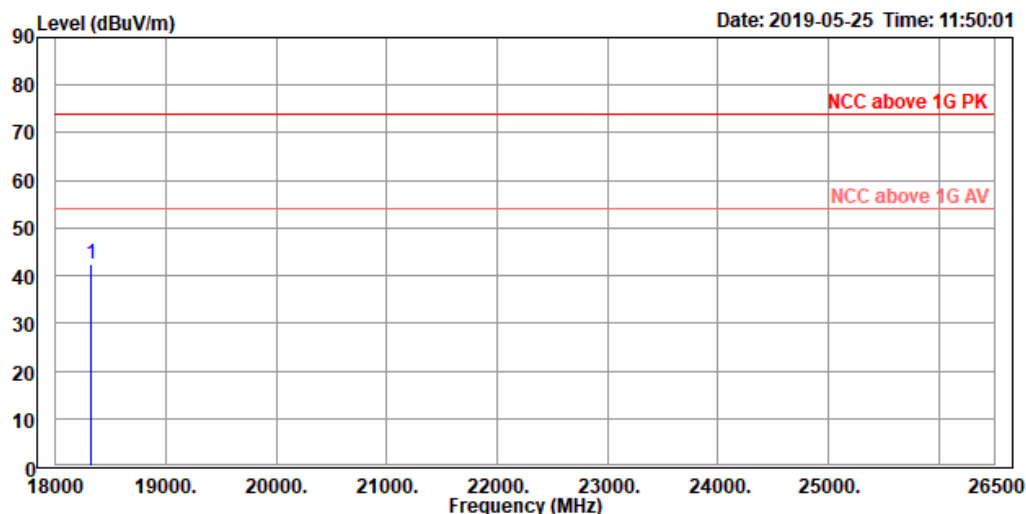


Site : 966A Chamber A
Condition : NCC above 1G PK 3m Horizontal
Test Engineer: Curry Chen
Product : Wii/Wii-U/SW/PS4 to SW/P4 controller adapter
Model No. : ZPPA00G
Test Rating : DC 5V
Tmp/Hum : 22°C/63%
Power Setting: 15
Mode : BT 3DH5 TX 2402
Memo : Z

	Freq	Level	Read Level	Factor	Limit Line	Over Limit	APos	TPos	Remark	Note
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg		
1	18323.000	42.51	38.08	4.43	74.00	-31.49	100	99	Peak	

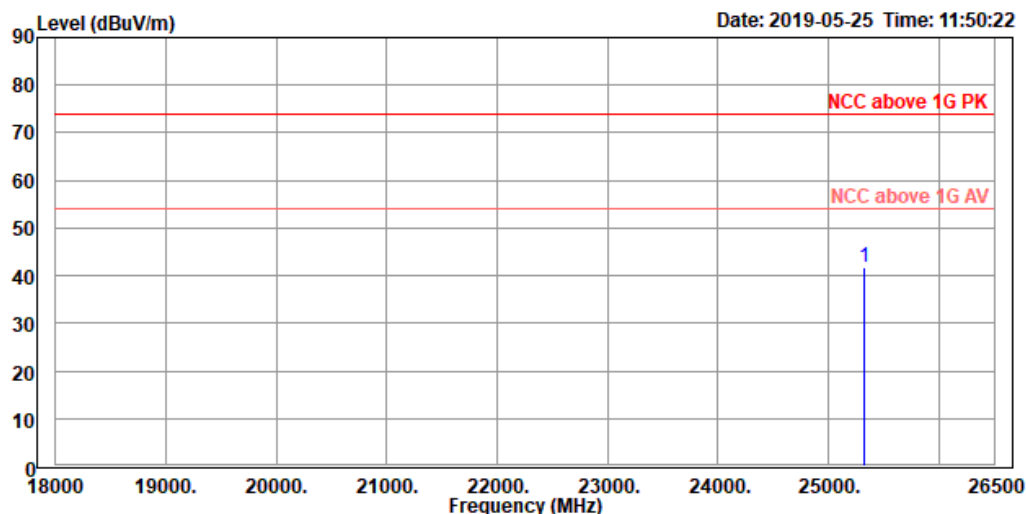


Site : 966A Chamber A
Condition : NCC above 1G PK 3m Vertical
Test Engineer: Curry Chen
Product : Wii/Wii-U/SW/PS4 to SW/P4 controller adapter
Model No. : ZPPA00G
Test Rating : DC 5V
Tmp/Hum : 22°C/63%
Power Setting: 15
Mode : BT 3DH5 TX 2402
Memo : Z

	Freq	Level	Read Level	Factor	Limit Line	Over Limit	APos	TPos	Remark	Note
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg		
1	25327.000	41.68	36.50	5.18	74.00	-32.32	100	310	Peak	

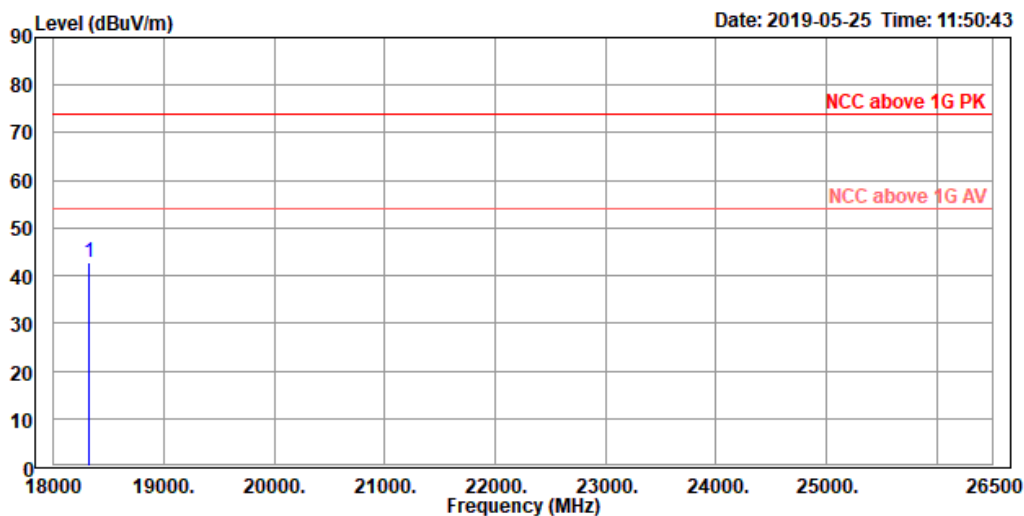


Site : 966A Chamber A
Condition : NCC above 1G PK 3m Horizontal
Test Engineer: Curry Chen
Product : Wii/Wii-U/SW/PS4 to SW/P4 controller adapter
Model No. : ZPPA00G
Test Rating : DC 5V
Tmp/Hum : 22°C/63%
Power Setting: 15
Mode : BT 3DH5 TX 2441
Memo : Z

	Freq	Level	Read Level	Factor	Limit Line	Over Limit	APos	TPos	Remark	Note
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg		
1	18314.500	42.85	38.41	4.44	74.00	-31.15	100		1 Peak	

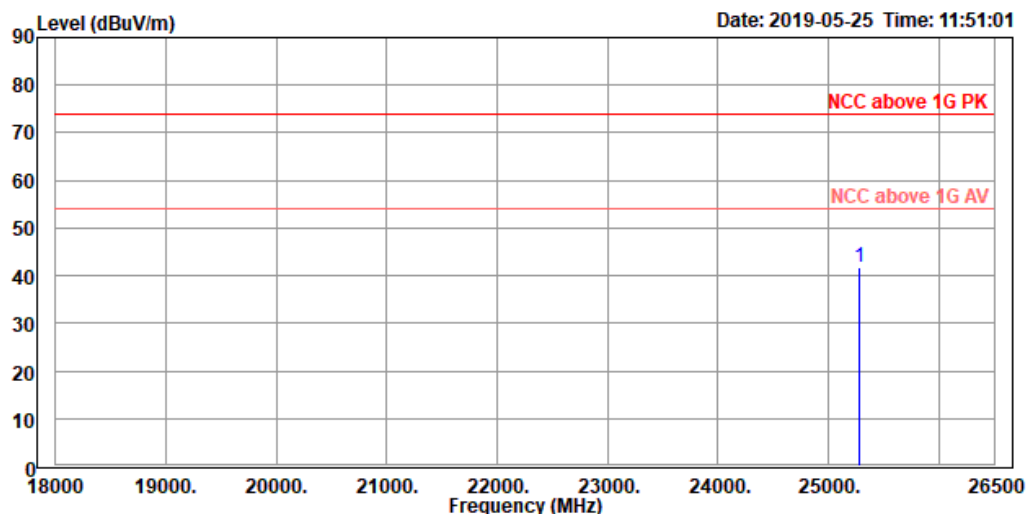


Site : 966A Chamber A
Condition : NCC above 1G PK 3m Vertical
Test Engineer: Curry Chen
Product : Wii/Wii-U/SW/PS4 to SW/P4 controller adapter
Model No. : ZPPA00G
Test Rating : DC 5V
Tmp/Hum : 22°C/63%
Power Setting: 15
Mode : BT 3DH5 TX 2441
Memo : Z

	Freq	Level	Read Level	Factor	Limit Line	Over Limit	APos	TPos	Remark	Note
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg		
1	25276.000	41.73	36.56	5.17	74.00	-32.27	100	66	Peak	

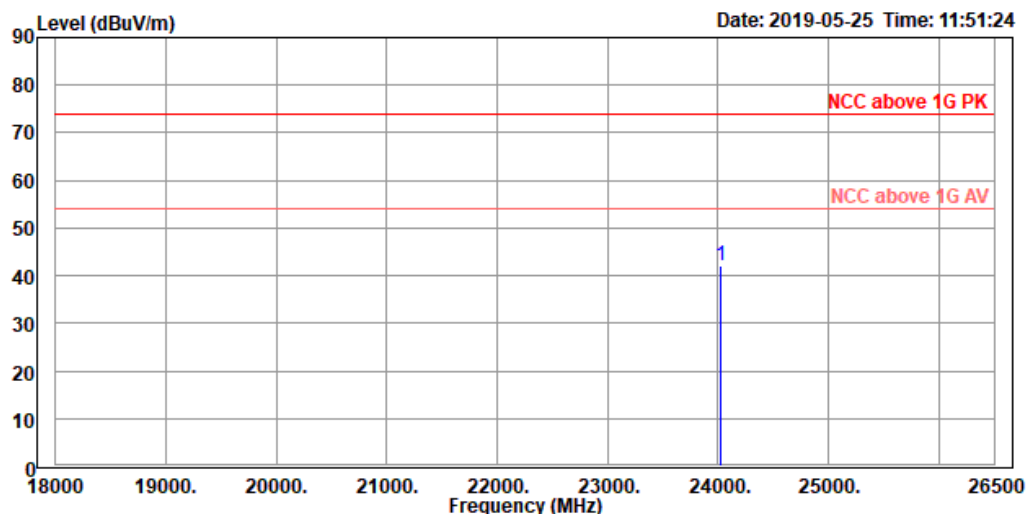

Site : 966A Chamber A
Condition : NCC above 1G PK 3m Horizontal
Test Engineer: Curry Chen
Product : Wii/Wii-U/SW/PS4 to SW/P4 controller adapter
Model No. : ZPPA00G
Test Rating : DC 5V
Tmp/Hum : 22°C/63%
Power Setting: 15
Mode : BT 3DH5 TX 2480
Memo : Z

	Freq	Level	Read Level	Factor	Limit Line	Over Limit	APos	TPos	Remark	Note
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg		
1	24018.000	41.99	36.66	5.33	74.00	-32.01	100	198	Peak	

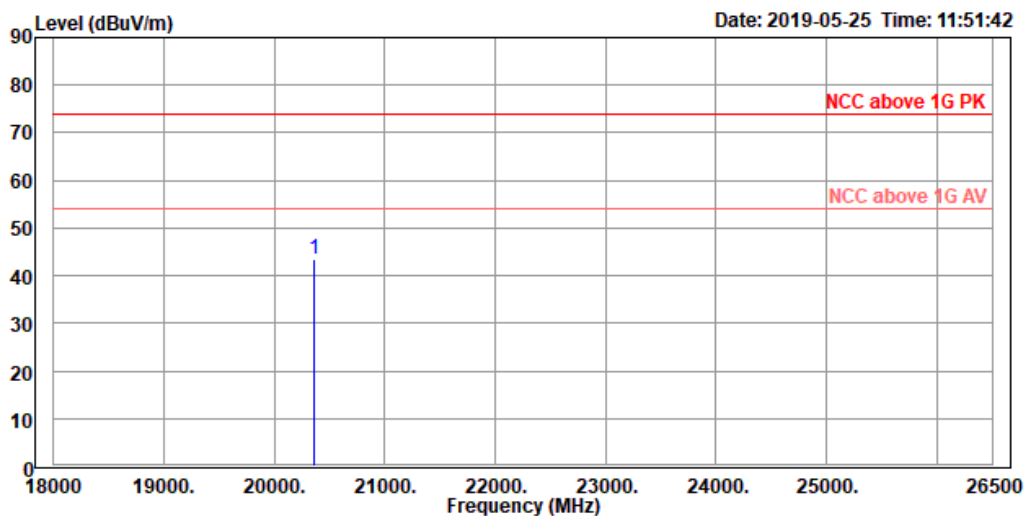


Site : 966A Chamber A
Condition : NCC above 1G PK 3m Vertical
Test Engineer: Curry Chen
Product : Wii/Wii-U/SW/PS4 to SW/P4 controller adapter
Model No. : ZPPA00G
Test Rating : DC 5V
Tmp/Hum : 22°C/63%
Power Setting: 15
Mode : BT 3DH5 TX 2480
Memo : Z

	Freq	Level	Read Level	Factor	Limit Line	Over Limit	APos	TPos	Remark	Note
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg		
1	20363.000	43.44	39.07	4.37	74.00	-30.56	100	274	Peak	

Spurious Emissions, TX Mode, 30M-1G




TUV Rheinland Taiwan Ltd.
11F., No. 758, Sec. 4 Bade Road, Songshan Dist, Taipei City 105
Tel: +886-2172-7000 Fax: +886-2528-0018

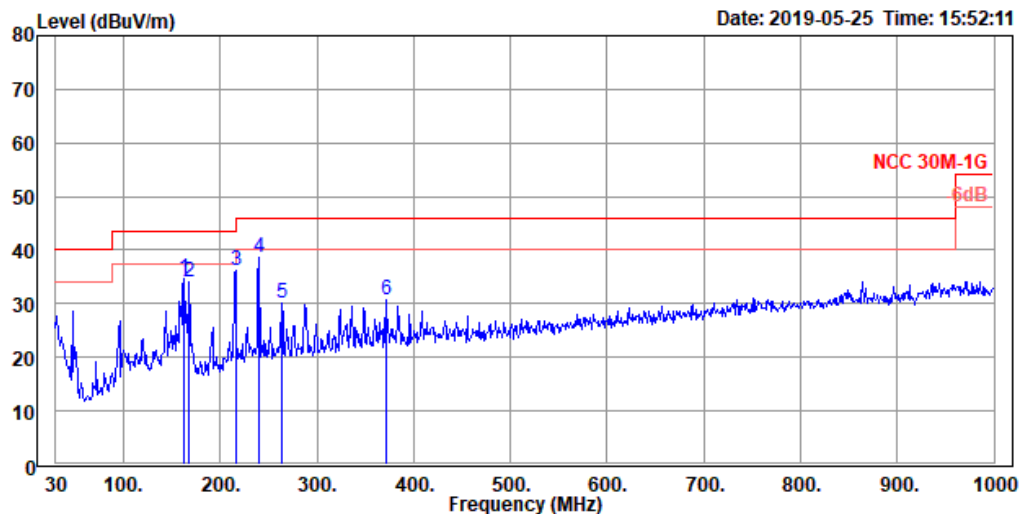

Site : 966A Chamber A
Condition : NCC 30M-1G 3m horizontal
Test Engineer: Curry Chen
Product : Wii/Wii-U/SW/PS4 to SW/P4 controller adapter
Model No. : ZPPA00G
Test Rating : DC 5V
Tmp/Hum : 22°C/63%
Power Setting: 15
Mode : BT 1DH5 TX 2441
Memo : Z

	Freq	Level	Read Level	Factor	Limit Line	Over Limit	APos	TPos	Remark	Note
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg		
1	161.920	34.75	42.97	-8.22	43.50	-8.75	100	223	QP	
2	167.740	34.13	42.89	-8.76	43.50	-9.37	100	227	QP	
3	216.240	36.31	44.80	-8.49	46.00	-9.69	100	174	QP	
4	239.520	38.72	45.50	-6.78	46.00	-7.28	100	177	QP	
5	263.770	29.97	35.03	-5.06	46.00	-16.03	100	189	QP	
6	371.440	30.61	33.66	-3.05	46.00	-15.39	100	227	QP	

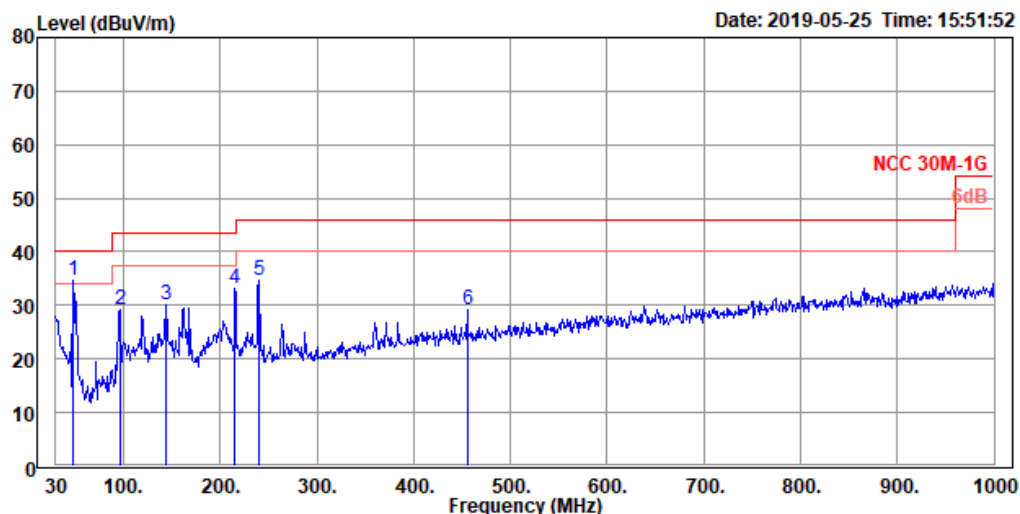


Site : 966A Chamber A
Condition : NCC 30M-1G 3m vertical
Test Engineer: Curry Chen
Product : Wii/Wii-U/SW/PS4 to SW/P4 controller adapter
Model No. : ZPPA00G
Test Rating : DC 5V
Tmp/Hum : 22°C/63%
Power Setting: 15
Mode : BT 1DH5 TX 2441
Memo : Z

	Freq	Level	Read Level	Factor	Limit Line	Over Limit	APos	TPos	Remark	Note
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg		
1 !	47.460	34.83	44.74	-9.91	40.00	-5.17	100	262	QP	
2	95.960	29.33	39.47	-10.14	43.50	-14.17	100	139	QP	
3	143.490	30.16	37.18	-7.02	43.50	-13.34	100	230	QP	
4	215.270	33.19	41.73	-8.54	43.50	-10.31	100	207	QP	
5	240.490	34.62	41.30	-6.68	46.00	-11.38	100	159	QP	
6	455.830	29.14	31.01	-1.87	46.00	-16.86	100	207	QP	

Spurious Emissions, TX Mode, 9k-30M




TUV Rheinland Taiwan Ltd.
11F., No. 758, Sec. 4 Bade Road. Songshan Dist, Taipei City 105
Tel:+886-2172-7000 Fax:+886-2528-0018

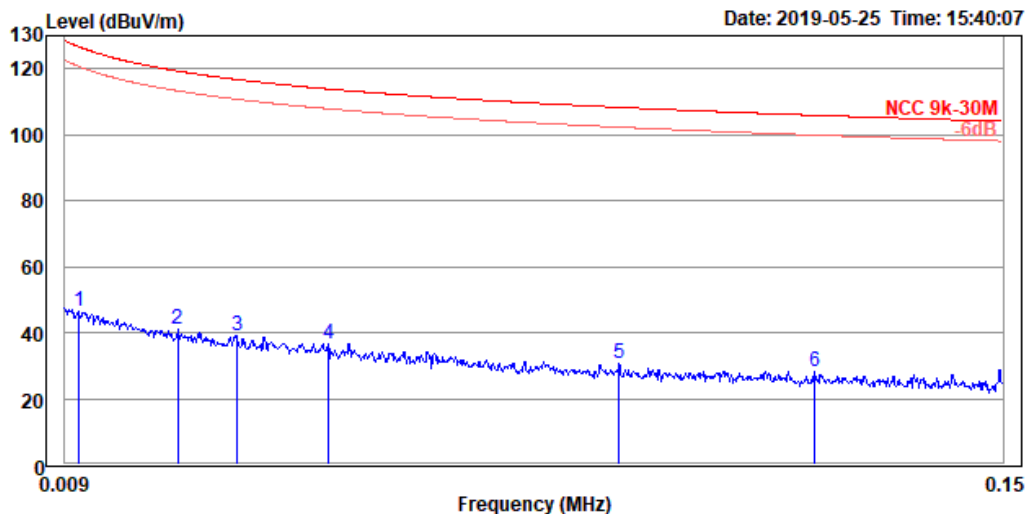

Site : 966A Chamber A
Condition : NCC 9k-30M 3m Vertical
Test Engineer: Curry Chen
Product : Wii/Wii-U/SW/PS4 to SW/P4 controller adapter
Model No. : ZPPA00G
Test Rating : DC 5V
Tmp/Hum : 22°C/63%
Power Setting: 15
Mode : BT 1DH5 TX 2441
Memo : Z

	Freq	Level	Read Level	Factor	Limit	Over Limit	APos	TPos	Remark	Note
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg		
1	0.011	46.30	27.74	18.56	126.78	-80.48	100	49	QP	
2	0.026	41.03	21.87	19.16	119.32	-78.29	100	150	QP	
3	0.035	39.17	19.95	19.22	116.76	-77.59	100	360	QP	
4	0.049	36.66	17.71	18.95	113.86	-77.20	100	333	QP	
5	0.092	30.87	12.46	18.41	108.29	-77.42	100	278	QP	
6	0.122	28.40	10.06	18.34	105.89	-77.49	100	204	QP	

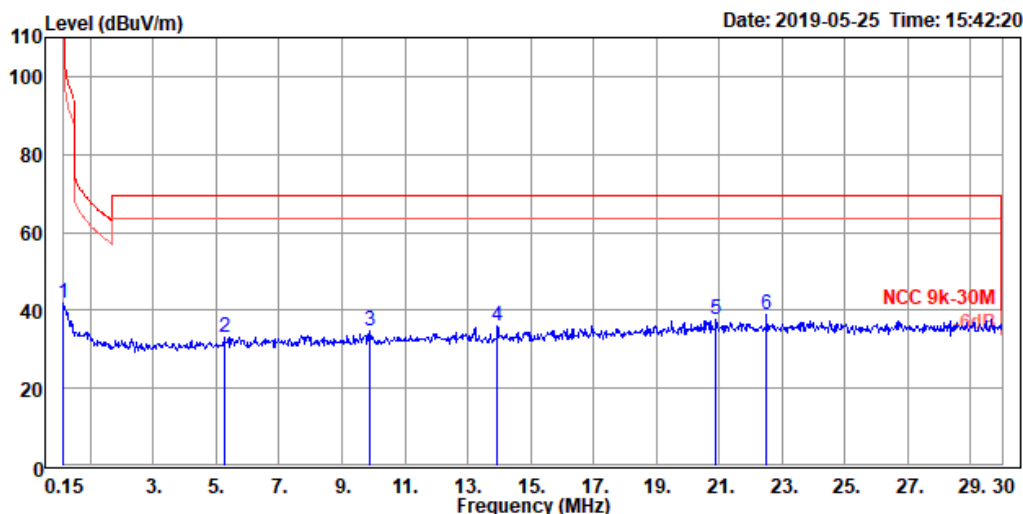


Site : 966A Chamber A
Condition : NCC 9k-30M 3m Vertical
Test Engineer: Curry Chen
Product : Wii/Wii-U/SW/PS4 to SW/P4 controller adapter
Model No. : ZPPA00G
Test Rating : DC 5V
Tmp/Hum : 22°C/63%
Power Setting: 15
Mode : BT 1DH5 TX 2441
Memo : Z

	Freq	Level	Read Level	Factor	Limit Line	Over Limit	APos	TPos	Remark	Note
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg		
1	0.150	41.83	23.48	18.35	104.08	-62.25	100	9	QP	
2	5.254	32.92	13.40	19.52	69.50	-36.58	100	249	QP	
3	9.881	34.83	14.41	20.42	69.50	-34.67	100	345	QP	
4	13.941	35.92	15.02	20.90	69.50	-33.58	100	78	QP	
5	20.896	37.64	16.00	21.64	69.50	-31.86	100	166	QP	
6	22.508	38.85	17.15	21.70	69.50	-30.65	100	8	QP	

Spurious Emissions, RX Mode, 1-18G




TUV Rheinland Taiwan Ltd.
11F., No. 758, Sec. 4 Bade Road. Songshan Dist, Taipei City 105
Tel: +886-2172-7000 Fax: +886-2528-0018

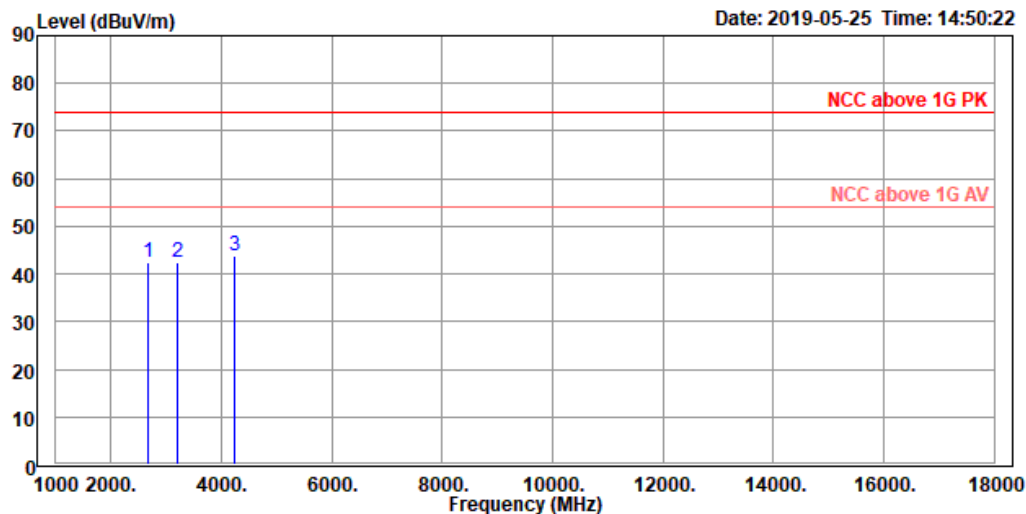


Site : 966A Chamber A
Condition : NCC above 1G PK 3m horizontal
Test Engineer: Curry Chen
Product : Wii/Wii-U/SW/PS4 to SW/P4 controller adapter
Model No. : ZPPA00G
Test Rating : DC 5V
Tmp/Hum : 22°C/63%
Power Setting: 15
Mode : BT 1DH5 RX 2441
Memo : Z

	Freq	Level	Read Level	Factor	Limit Line	Over Limit	APos	TPos	Remark	Note
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg		
1	2683.000	42.50	50.28	-7.78	74.00	-31.50	100	145	Peak	
2	3210.000	42.48	49.58	-7.10	74.00	-31.52	100	183	Peak	
3	4247.000	43.96	48.77	-4.81	74.00	-30.04	100	145	Peak	

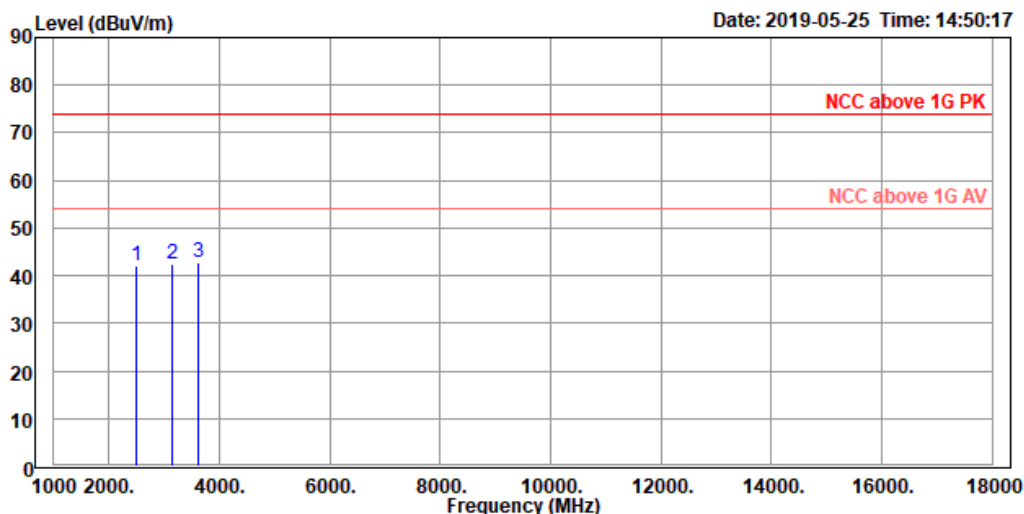


Site : 966A Chamber A
Condition : NCC above 1G PK 3m vertical
Test Engineer: Curry Chen
Product : Wii/Wii-U/SW/PS4 to SW/P4 controller adapter
Model No. : ZPPA00G
Test Rating : DC 5V
Tmp/Hum : 22°C/63%
Power Setting: 15
Mode : BT 1DH5 RX 2441
Memo : Z

	Freq	Level	Read Level	Factor	Limit Line	Over Limit	APos	TPos	Remark	Note
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg		
1	2496.000	42.26	50.35	-8.09	74.00	-31.74	100	267	Peak	
2	3142.000	42.30	49.45	-7.15	74.00	-31.70	100	298	Peak	
3	3618.000	42.87	49.46	-6.59	74.00	-31.13	100	207	Peak	

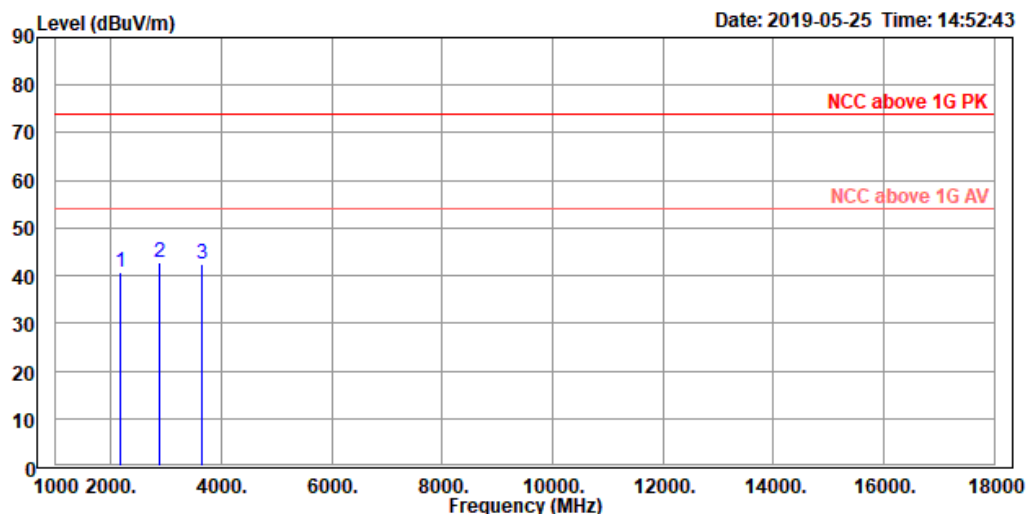

Site : 966A Chamber A
Condition : NCC above 1G PK 3m horizontal
Test Engineer: Curry Chen
Product : Wii/Wii-U/SW/PS4 to SW/P4 controller adapter
Model No. : ZPPA00G
Test Rating : DC 5V
Tmp/Hum : 22°C/63%
Power Setting: 15
Mode : BT 3DH5 RX 2441
Memo : Z

	Freq	Level	Read Level	Factor	Limit Line	Over Limit	APos	TPos	Remark	Note
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg		
1	2156.000	40.69	48.85	-8.16	74.00	-33.31	100	142	Peak	
2	2887.000	42.71	50.16	-7.45	74.00	-31.29	100	91	Peak	
3	3635.000	42.34	48.90	-6.56	74.00	-31.66	100	321	Peak	

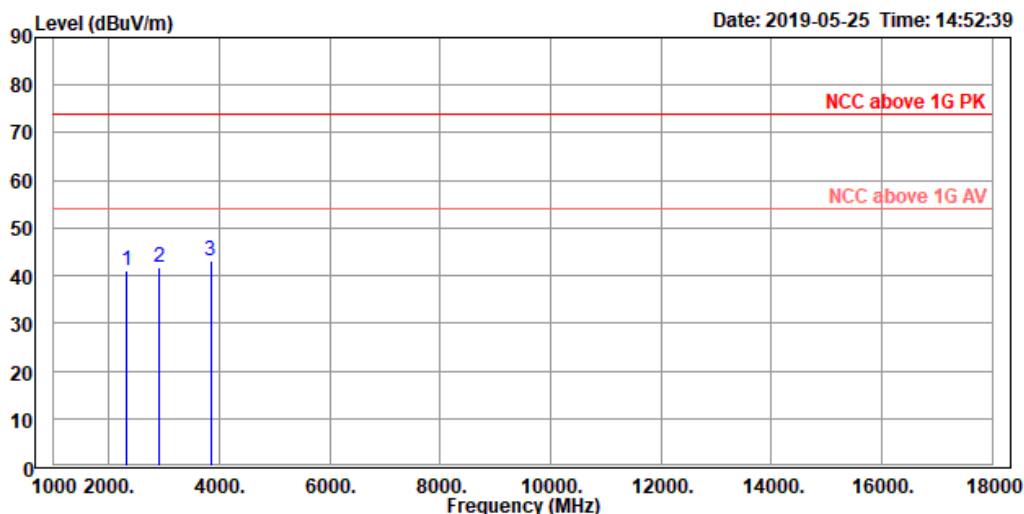


Site : 966A Chamber A
Condition : NCC above 1G PK 3m vertical
Test Engineer: Curry Chen
Product : Wii/Wii-U/SW/PS4 to SW/P4 controller adapter
Model No. : ZPPA00G
Test Rating : DC 5V
Tmp/Hum : 22°C/63%
Power Setting: 15
Mode : BT 3DH5 RX 2441
Memo : Z

	Freq	Level	Read Level	Factor	Limit Line	Over Limit	APos	TPos	Remark	Note
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg		
1	2309.000	41.11	49.23	-8.12	74.00	-32.89	100	360	Peak	
2	2921.000	41.87	49.26	-7.39	74.00	-32.13	100	82	Peak	
3	3839.000	42.96	49.07	-6.11	74.00	-31.04	100	10	Peak	

Spurious Emissions, RX Mode, 18-26G




TUV Rheinland Taiwan Ltd.
11F., No. 758, Sec. 4 Bade Road. Songshan Dist, Taipei City 105
Tel:+886-2172-7000 Fax:+886-2528-0018

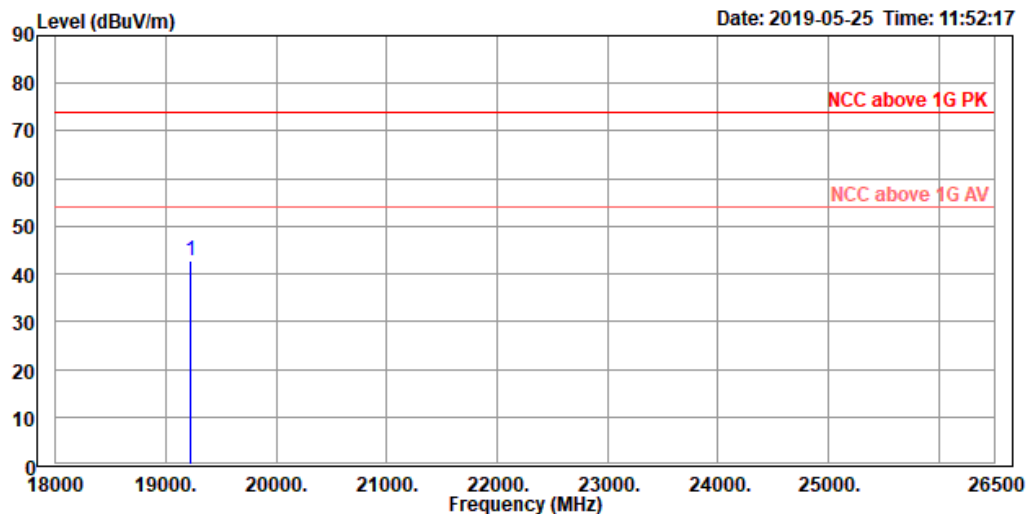


Site : 966A Chamber A
Condition : NCC above 1G PK 3m Horizontal
Test Engineer: Curry Chen
Product : Wii/Wii-U/SW/PS4 to SW/P4 controller adapter
Model No. : ZPPA00G
Test Rating : DC 5V
Tmp/Hum : 22°C/63%
Power Setting: 15
Mode : BT 1DH5 RX 2441
Memo : Z

	Freq	Level	Read Level	Factor	Limit	Over Limit	APos	TPos	Remark	Note
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg		
1	19215.500	42.78	38.73	4.05	74.00	-31.22	100	45	Peak	

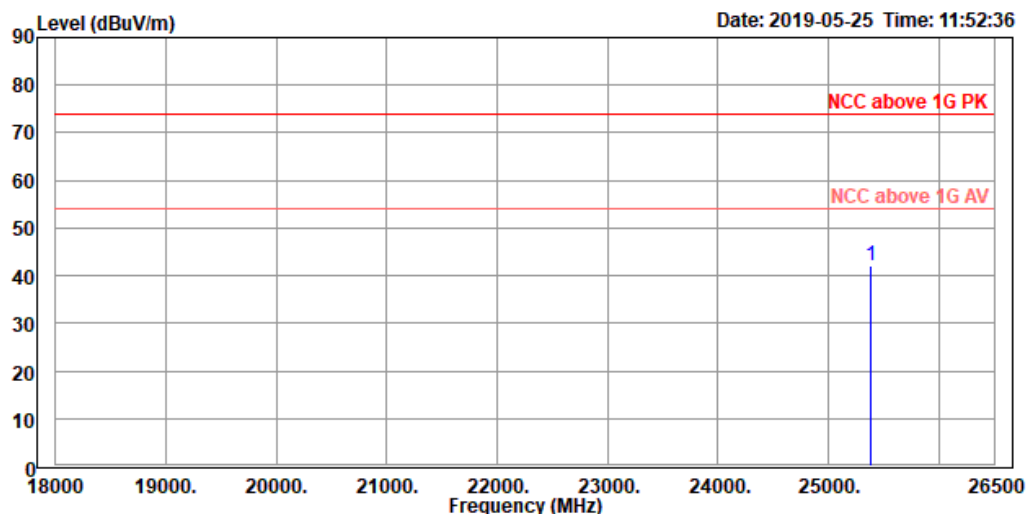


Site : 966A Chamber A
Condition : NCC above 1G PK 3m Vertical
Test Engineer: Curry Chen
Product : Wii/Wii-U/SW/PS4 to SW/P4 controller adapter
Model No. : ZPPA00G
Test Rating : DC 5V
Tmp/Hum : 22°C/63%
Power Setting: 15
Mode : BT 1DH5 RX 2441
Memo : Z

	Freq	Level	Read Level	Factor	Limit Line	Over Limit	APos	TPos	Remark	Note
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg		
1	25386.500	41.96	36.77	5.19	74.00	-32.04	100	101	Peak	

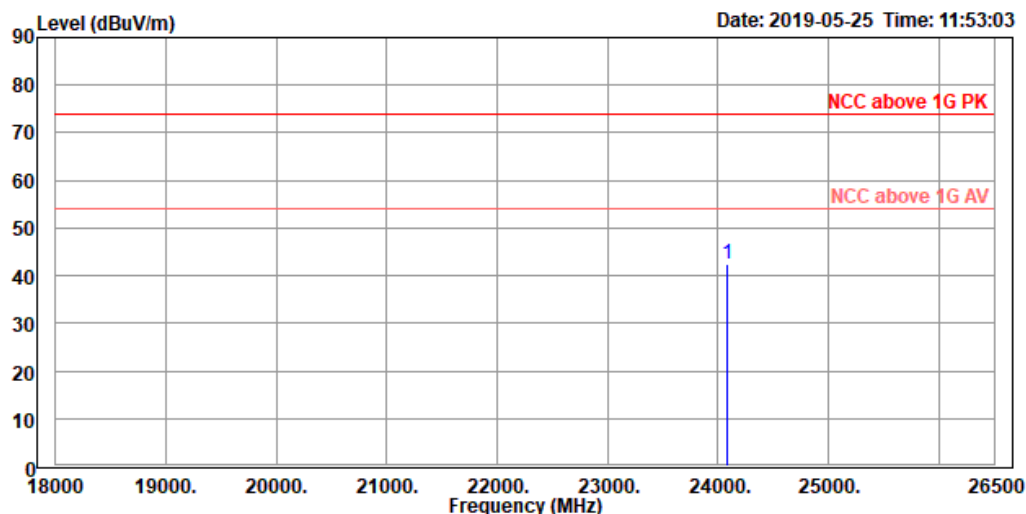

Site : 966A Chamber A
Condition : NCC above 1G PK 3m Horizontal
Test Engineer: Curry Chen
Product : Wii/Wii-U/SW/PS4 to SW/P4 controller adapter
Model No. : ZPPA00G
Test Rating : DC 5V
Tmp/Hum : 22°C/63%
Power Setting: 15
Mode : BT 3DH5 RX 2441
Memo : Z

	Freq	Level	Read Level	Factor	Limit Line	Over Limit	APos	TPos	Remark	Note
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg		
1	24077.500	42.42	37.13	5.29	74.00	-31.58	100	146	Peak	

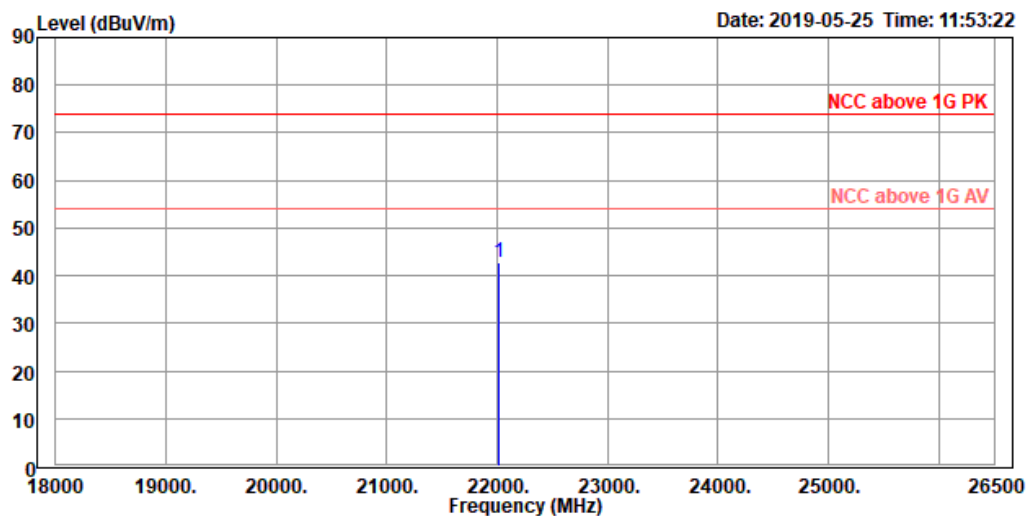


Site : 966A Chamber A
Condition : NCC above 1G PK 3m Vertical
Test Engineer: Curry Chen
Product : Wii/Wii-U/SW/PS4 to SW/P4 controller adapter
Model No. : ZPPA00G
Test Rating : DC 5V
Tmp/Hum : 22°C/63%
Power Setting: 15
Mode : BT 3DH5 RX 2441
Memo : Z

	Freq	Level	Read Level	Factor	Limit Line	Over Limit	APos	TPos	Remark	Note
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg		
1	22020.500	42.71	38.31	4.40	74.00	-31.29	100	10	Peak	

Spurious Emissions, RX Mode, 30M-1G




TUV Rheinland Taiwan Ltd.
11F., No. 758, Sec. 4 Bade Road, Songshan Dist, Taipei City 105
Tel: +886-2172-7000 Fax: +886-2528-0018

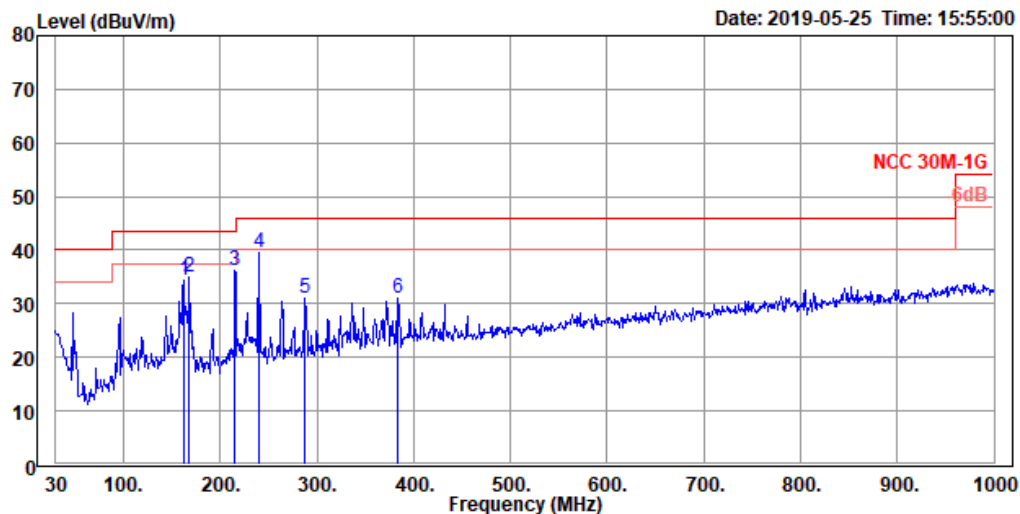

Site : 966A Chamber A
Condition : NCC 30M-1G 3m horizontal
Test Engineer: Curry Chen
Product : Wii/Wii-U/SW/PS4 to SW/P4 controller adapter
Model No. : ZPPA00G
Test Rating : DC 5V
Tmp/Hum : 22°C/63%
Power Setting: 15
Mode : BT 1DH5 RX 2441
Memo : Z

	Freq	Level	Read Level	Factor	Limit Line	Over Limit	APos	TPos	Remark	Note
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg		
1	161.920	34.41	42.63	-8.22	43.50	-9.09	100	217	QP	
2	167.740	34.98	43.74	-8.76	43.50	-8.52	100	234	QP	
3	215.270	36.19	44.73	-8.54	43.50	-7.31	100	172	QP	
4	239.520	39.41	46.19	-6.78	46.00	-6.59	100	182	QP	
5	288.020	30.90	35.75	-4.85	46.00	-15.10	100	283	QP	
6	384.050	31.01	33.85	-2.84	46.00	-14.99	100	205	QP	

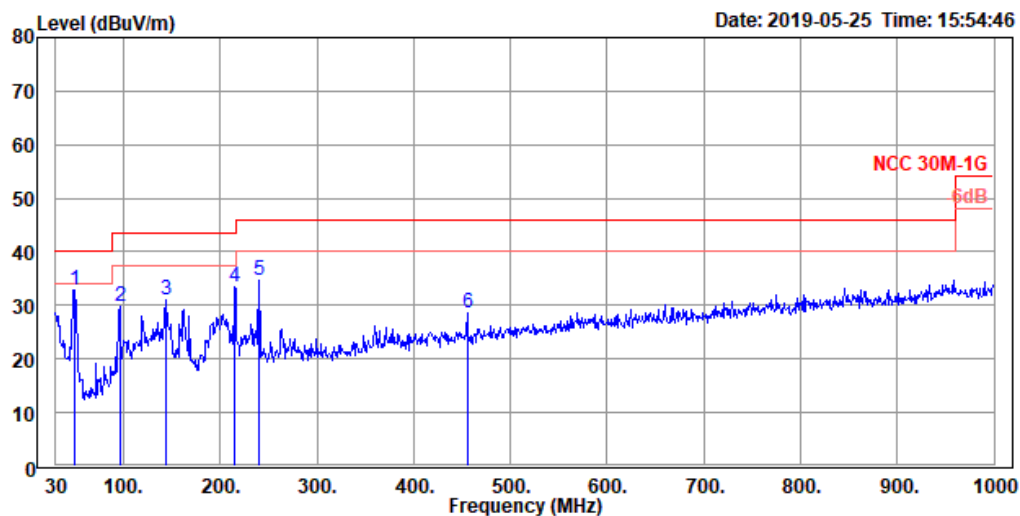


Site : 966A Chamber A
Condition : NCC 30M-1G 3m vertical
Test Engineer: Curry Chen
Product : Wii/Wii-U/SW/PS4 to SW/P4 controller adapter
Model No. : ZPPA00G
Test Rating : DC 5V
Tmp/Hum : 22°C/63%
Power Setting: 15
Mode : BT 1DH5 RX 2441
Memo : Z

	Freq	Level	Read Level	Factor	Limit Line	Over Limit	APos	TPos	Remark	Note
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg		
1	49.400	32.86	43.77	-10.91	40.00	-7.14	100	236	QP	
2	95.960	29.79	39.93	-10.14	43.50	-13.71	100	152	QP	
3	144.460	30.99	38.05	-7.06	43.50	-12.51	100	230	QP	
4	215.270	33.60	42.14	-8.54	43.50	-9.90	100	208	QP	
5	239.520	34.79	41.57	-6.78	46.00	-11.21	100	169	QP	
6	455.830	28.67	30.54	-1.87	46.00	-17.33	100	218	QP	

Spurious Emissions, RX Mode, 9K-30M




TUV Rheinland Taiwan Ltd.
11F., No. 758, Sec. 4 Bade Road, Songshan Dist, Taipei City 105
Tel: +886-2172-7000 Fax: +886-2528-0018

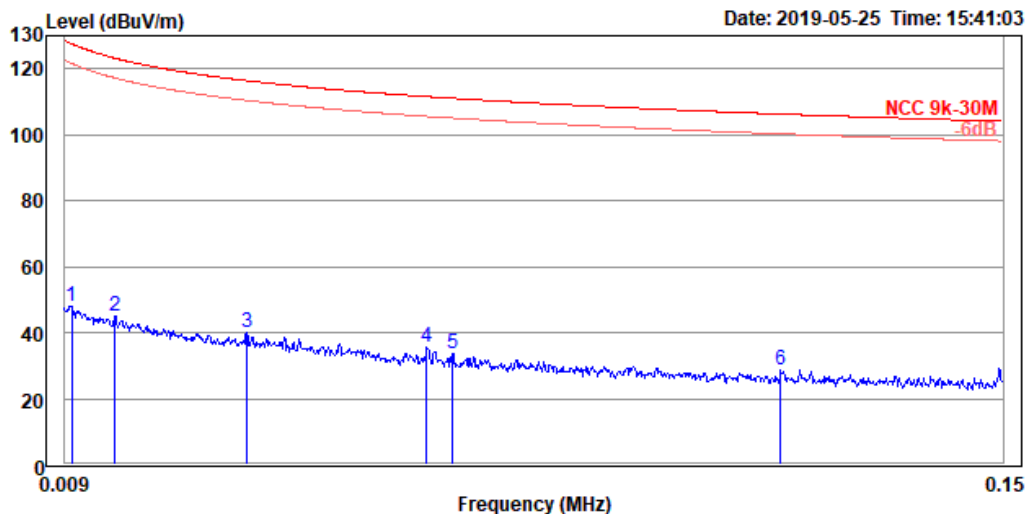

Site : 966A Chamber A
Condition : NCC 9k-30M 3m Vertical
Test Engineer: Curry Chen
Product : Wii/Wii-U/SW/PS4 to SW/P4 controller adapter
Model No. : ZPPA00G
Test Rating : DC 5V
Tmp/Hum : 22°C/63%
Power Setting: 15
Mode : BT 1DH5 RX 2441
Memo : Z

	Freq	Level	Read Level	Factor	Limit Line	Over Limit	APos	TPos	Remark	Note
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg		
1	0.010	48.13	29.61	18.52	127.60	-79.47	100	312	QP	
2	0.016	44.97	26.19	18.78	123.25	-78.28	100	236	QP	
3	0.036	39.79	20.60	19.19	116.38	-76.59	100	1	QP	
4	0.063	35.70	16.94	18.76	111.55	-75.85	100	66	QP	
5	0.067	33.72	15.01	18.71	111.04	-77.32	100	172	QP	
6	0.117	28.46	10.12	18.34	106.26	-77.80	100	87	QP	

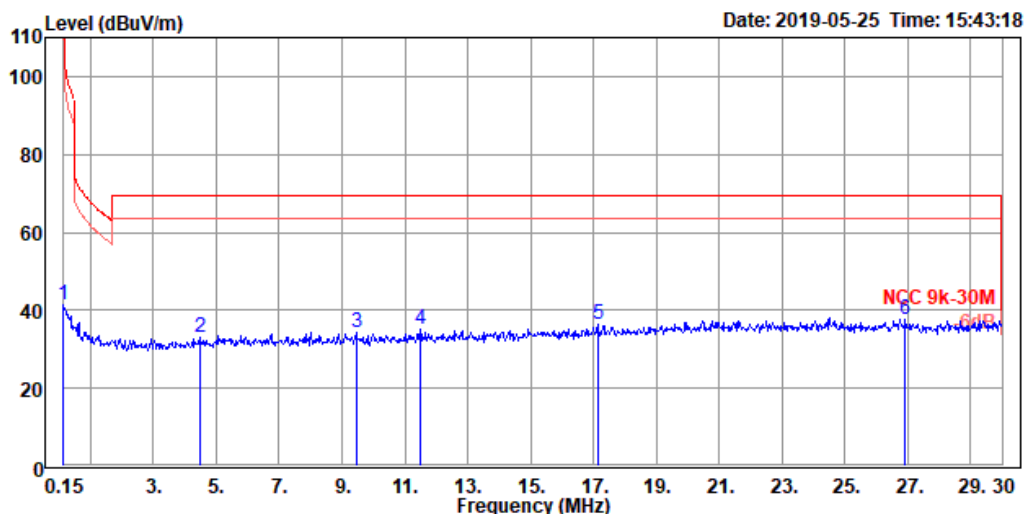


Site : 966A Chamber A
Condition : NCC 9k-30M 3m Vertical
Test Engineer: Curry Chen
Product : Wii/Wii-U/SW/PS4 to SW/P4 controller adapter
Model No. : ZPPA00G
Test Rating : DC 5V
Tmp/Hum : 22°C/63%
Power Setting: 15
Mode : BT 1DH5 RX 2441
Memo : Z

	Freq	Level	Read	Limit	Over	APos	TPos	Remark	Note
	MHz	dBuV/m	Level	Line	Limit				
			dBuV		dB	cm	deg		
1	0.150	41.40	23.05	18.35	104.08	-62.68	100	314 QP	
2	4.478	32.90	13.67	19.23	69.50	-36.60	100	6 QP	
3	9.463	34.16	13.83	20.33	69.50	-35.34	100	174 QP	
4	11.493	35.14	14.53	20.61	69.50	-34.36	100	98 QP	
5	17.135	36.42	15.15	21.27	69.50	-33.08	100	310 QP	
6	26.925	37.77	15.91	21.86	69.50	-31.73	100	301 QP	




TUV Rheinland Taiwan Ltd.
11F., No. 758, Sec. 4 Bade Road, Songshan Dist, Taipei City 105
Tel: +886-2172-7000 Fax: +886-2528-0018

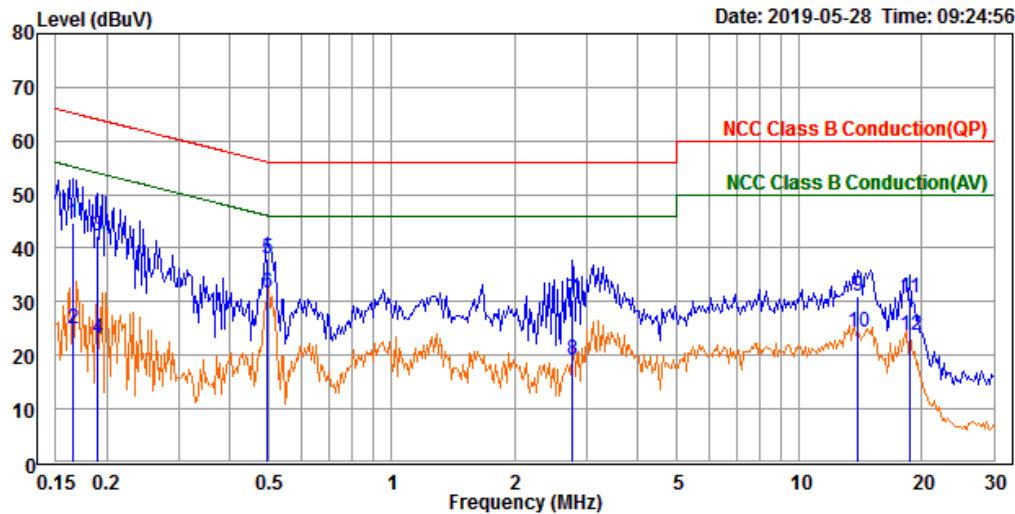

Trace: 1

Site : Conduction room
Condition : NCC Class B Conduction(QP) line1
Test Engineer: Amy Hsu
Applicant : 孕龍科技股份有限公司
Product : Wii/Wii-U/SW/P4 to SW/P4 controller adapter
Model No. : ZPPA00G
Test Rating : 110Vac/60Hz
Tmp/Hum : 23.8°C/37%
Memo :

	Freq	Read Level	Factor	Level	Limit	Over Limit	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	
1	0.166	34.95	9.68	44.63	65.17	-20.54	QP
2	0.166	15.27	9.68	24.95	55.17	-30.22	Average
3	0.190	32.74	9.68	42.42	64.02	-21.60	QP
4	0.190	13.57	9.68	23.25	54.02	-30.77	Average
5	0.494	28.43	9.69	38.12	56.09	-17.97	QP
6	0.494	21.95	9.69	31.64	46.09	-14.45	Average
7	2.761	20.55	9.73	30.28	56.00	-25.72	QP
8	2.761	9.52	9.73	19.25	46.00	-26.75	Average
9	13.954	21.23	9.85	31.08	60.00	-28.92	QP
10	13.954	14.39	9.85	24.24	50.00	-25.76	Average
11	18.617	21.00	9.85	30.85	60.00	-29.15	QP
12	18.617	13.80	9.85	23.65	50.00	-26.35	Average

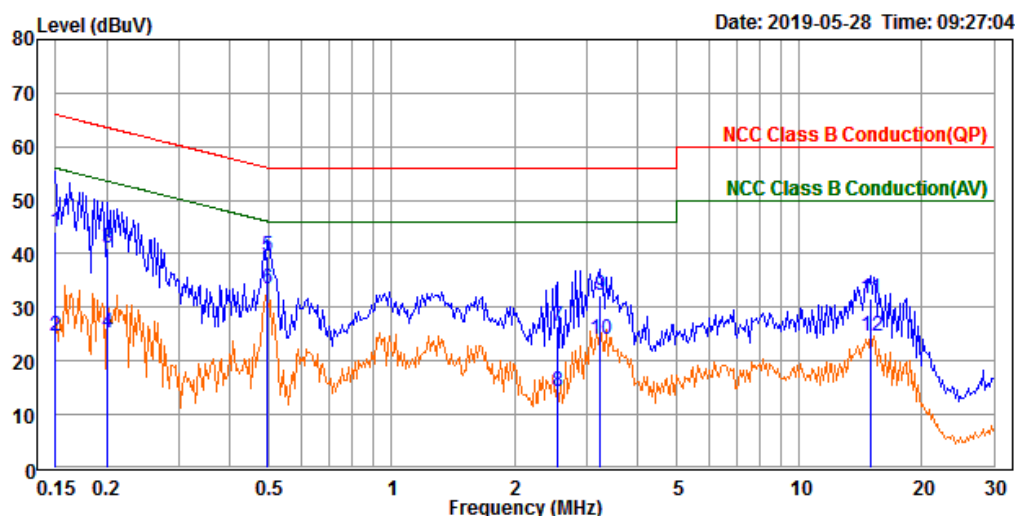

Trace: 1

Site : Conduction room
Condition : NCC Class B Conduction(QP) neutral
Test Engineer: Amy Hsu
Applicant : 孕龍科技股份有限公司
Product : Wii/Wii-U/SW/P4 to SW/P4 controller adapter
Model No. : ZPPA00G
Test Rating : 110Vac/60Hz
Tmp/Hum : 23.8°C/37%
Memo :

	Freq	Read Level	Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	
1	0.150	34.36	9.68	44.04	66.00	-21.96	QP
2	0.150	15.07	9.68	24.75	56.00	-31.25	Average
3	0.200	31.43	9.68	41.11	63.61	-22.50	QP
4	0.200	15.62	9.68	25.30	53.61	-28.31	Average
5	0.494	29.98	9.68	39.66	56.09	-16.43	QP
6	0.494	23.82	9.68	33.50	46.09	-12.59	Average
7	2.550	16.86	9.72	26.58	56.00	-29.42	QP
8	2.550	4.58	9.72	14.30	46.00	-31.70	Average
9	3.237	22.57	9.74	32.31	56.00	-23.69	QP
10	3.237	14.20	9.74	23.94	46.00	-22.06	Average
11	14.960	21.79	9.88	31.67	60.00	-28.33	QP
12	14.960	14.62	9.88	24.50	50.00	-25.50	Average