


Site: AC1	Time: 2018/06/30 - 07:42
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11ax-HE40 at Channel 5670MHz	

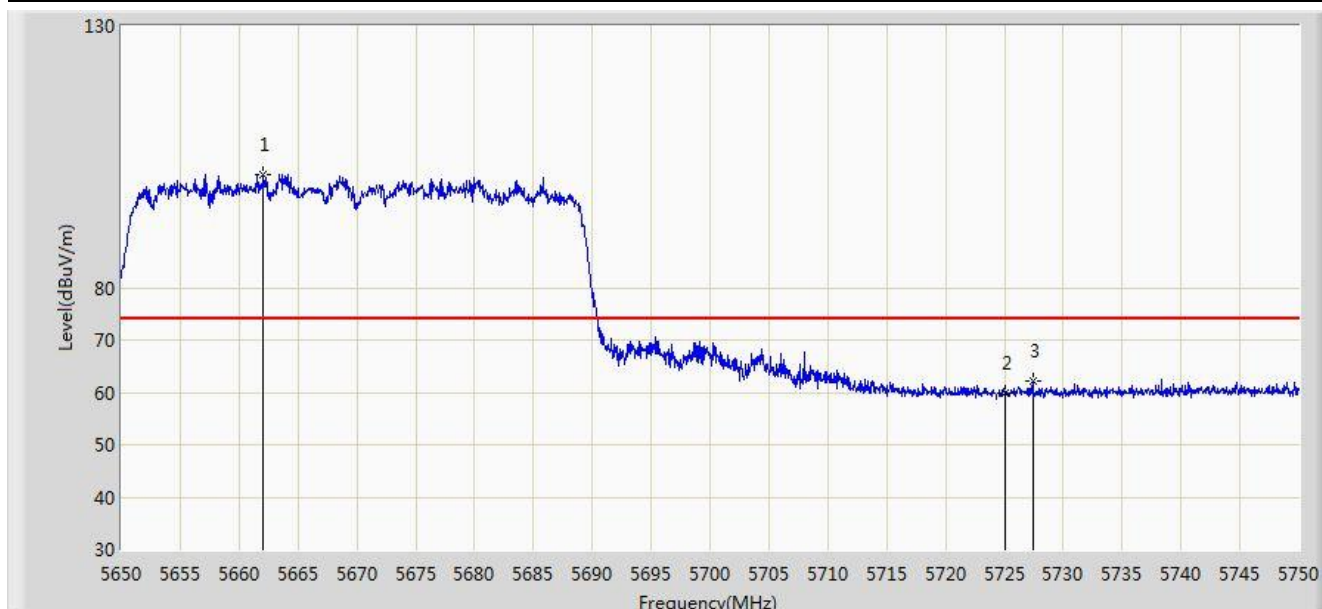


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5662.050	101.641	96.926	N/A	N/A	4.714	PK
2			5725.000	59.901	54.872	-14.099	74.000	5.029	PK
3			5727.400	62.270	57.226	-11.730	74.000	5.044	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/30 - 07:43
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11ax-HE40 at Channel 5670MHz	

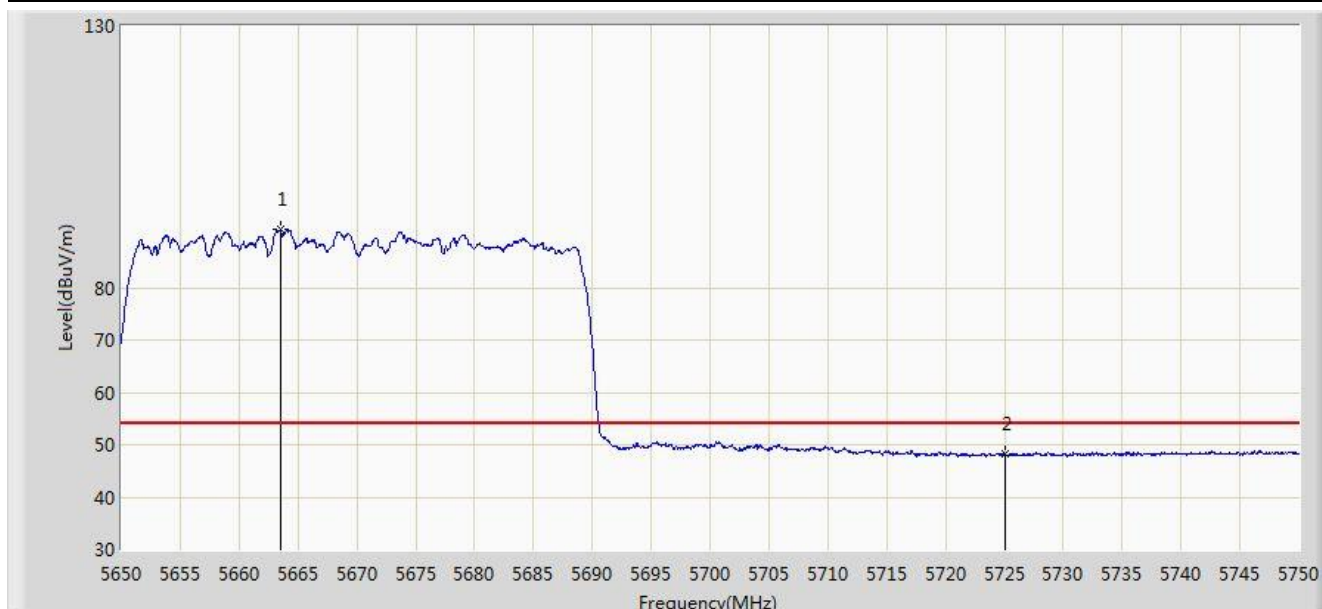

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5663.500	91.053	86.332	N/A	N/A	4.722	AV
2			5725.000	48.170	43.141	-5.830	54.000	5.029	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/30 - 07:41
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11ax-HE40 at Channel 5670MHz	



No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5655.150	116.893	112.205	N/A	N/A	4.688	PK
2			5725.000	67.381	62.352	-6.619	74.000	5.029	PK
3			5725.900	69.235	64.200	-4.765	74.000	5.036	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/30 - 07:39
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11ax-HE40 at Channel 5670MHz	




No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5656.100	104.397	99.705	N/A	N/A	4.692	AV
2			5725.000	52.252	47.223	-1.748	54.000	5.029	AV
3			5726.300	52.863	47.826	-1.137	54.000	5.037	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/30 - 07:47
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11ax-HE40 at Channel 5755MHz	

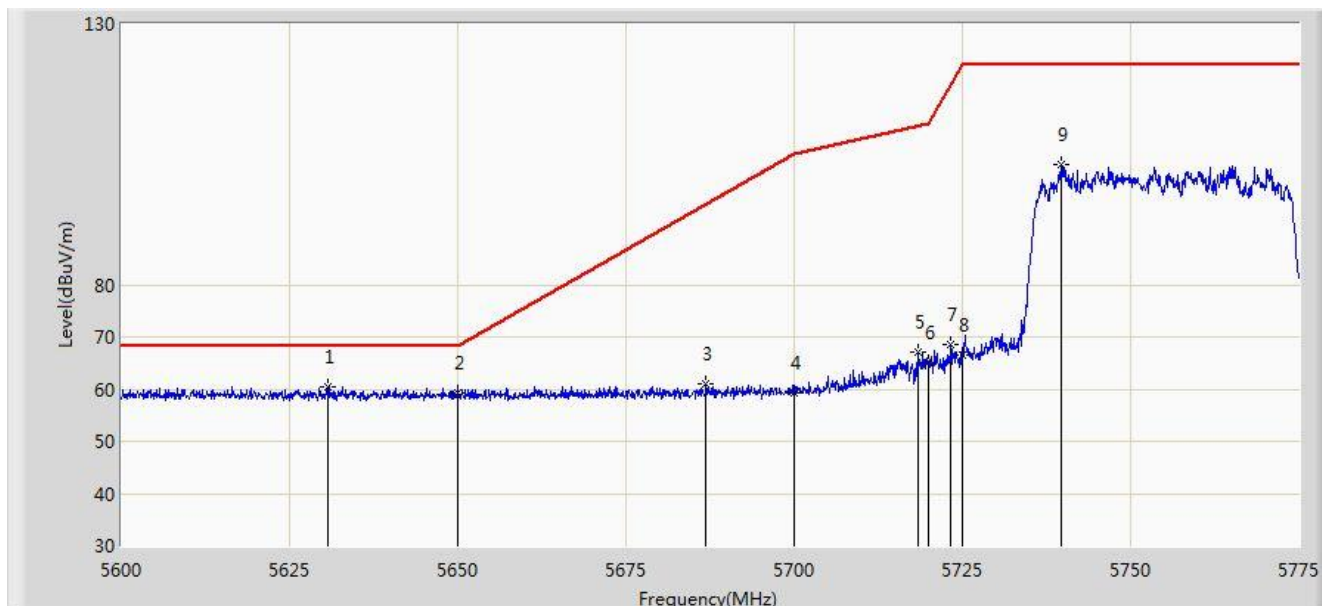


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5630.625	60.478	55.867	-7.722	68.200	4.611	PK
2			5650.000	59.277	54.606	-8.923	68.200	4.671	PK
3			5686.888	61.158	56.343	-34.371	95.529	4.815	PK
4			5700.000	59.355	54.477	-45.845	105.200	4.878	PK
5			5718.475	67.188	62.201	-43.186	110.374	4.986	PK
6			5720.000	64.992	59.995	-45.808	110.800	4.997	PK
7			5723.288	68.411	63.393	-49.887	118.298	5.018	PK
8			5725.000	66.504	61.475	-55.696	122.200	5.029	PK
9			5739.737	102.925	97.802	N/A	N/A	5.123	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/30 - 07:46
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11ax-HE40 at Channel 5755MHz	

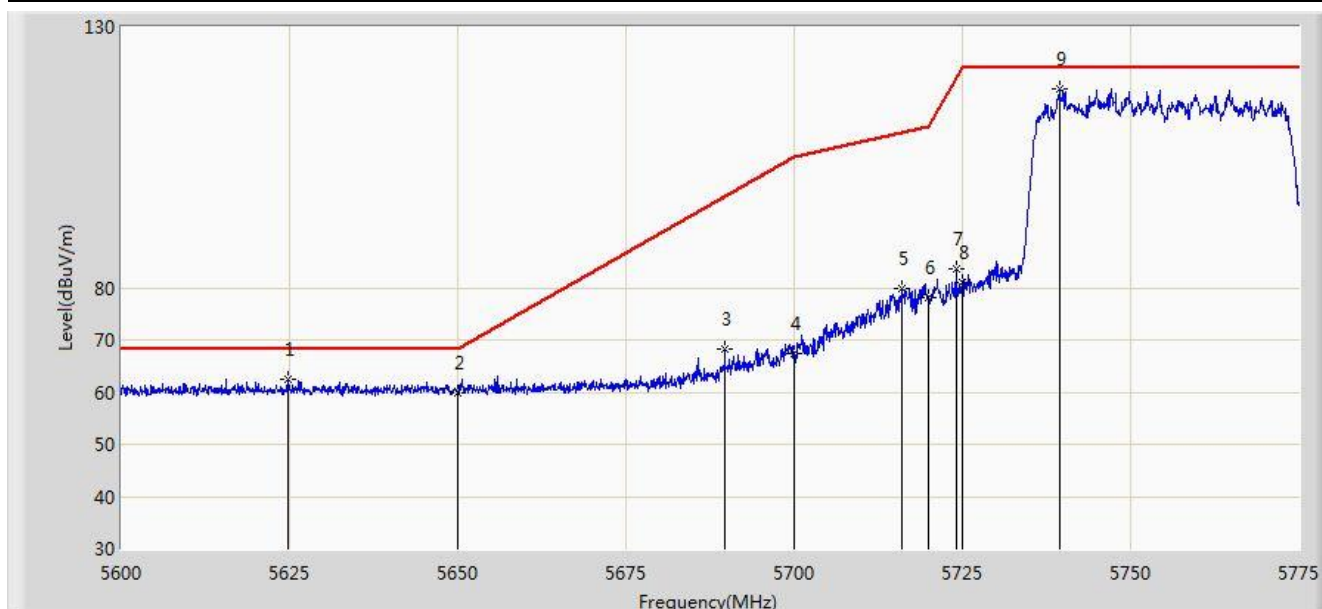


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5624.675	62.559	57.965	-5.641	68.200	4.595	PK
2			5650.000	59.942	55.271	-8.258	68.200	4.671	PK
3			5689.687	68.384	63.558	-29.211	97.595	4.825	PK
4			5700.000	67.379	62.501	-37.821	105.200	4.878	PK
5			5715.937	79.735	74.764	-29.929	109.664	4.971	PK
6			5720.000	77.991	72.994	-32.809	110.800	4.997	PK
7			5724.075	83.676	78.653	-36.416	120.092	5.023	PK
8			5725.000	80.872	75.843	-41.328	122.200	5.029	PK
9		*	5739.388	118.115	112.994	N/A	N/A	5.120	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/30 - 07:51
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11ax-HE40 at Channel 5795MHz	

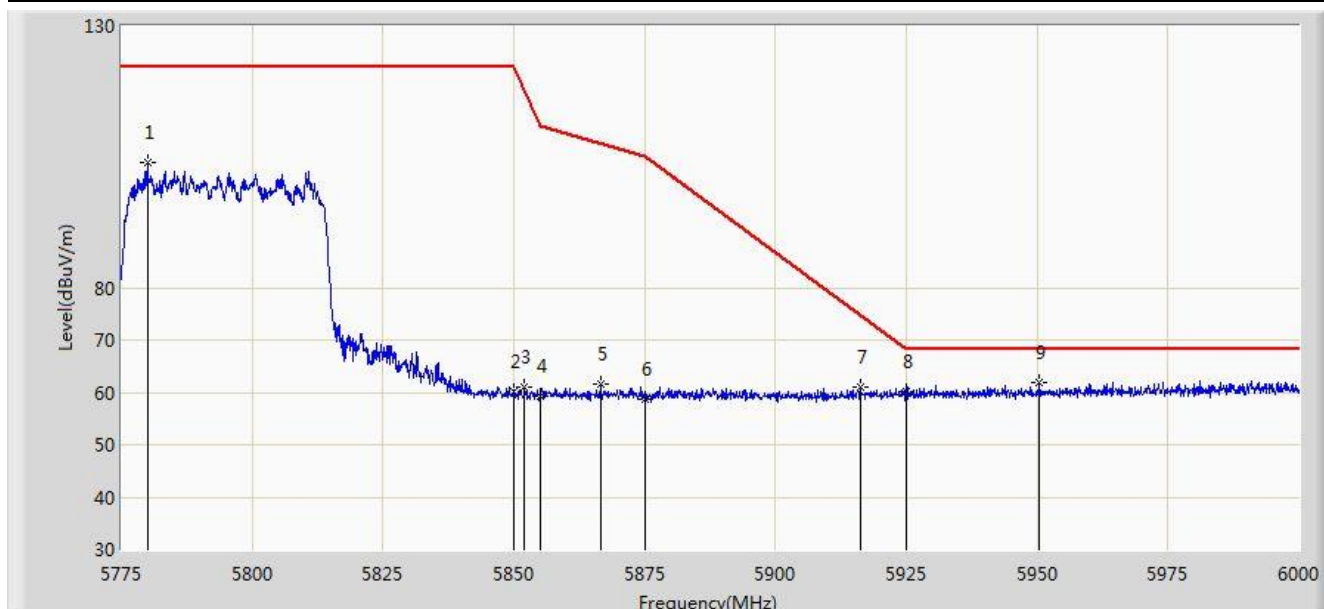


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5779.950	103.953	98.612	N/A	N/A	5.342	PK
2			5850.000	60.098	54.372	-62.102	122.200	5.726	PK
3			5852.062	60.893	55.159	-56.604	117.497	5.734	PK
4			5855.000	59.356	53.610	-51.444	110.800	5.746	PK
5			5866.575	61.588	55.797	-45.969	107.557	5.792	PK
6			5875.000	58.734	52.914	-46.466	105.200	5.820	PK
7			5916.187	61.082	55.137	-13.617	74.699	5.945	PK
8			5925.000	60.218	54.252	-7.982	68.200	5.967	PK
9		*	5950.388	61.799	55.772	-6.401	68.200	6.027	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/30 - 07:49
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11ax-HE40 at Channel 5795MHz	

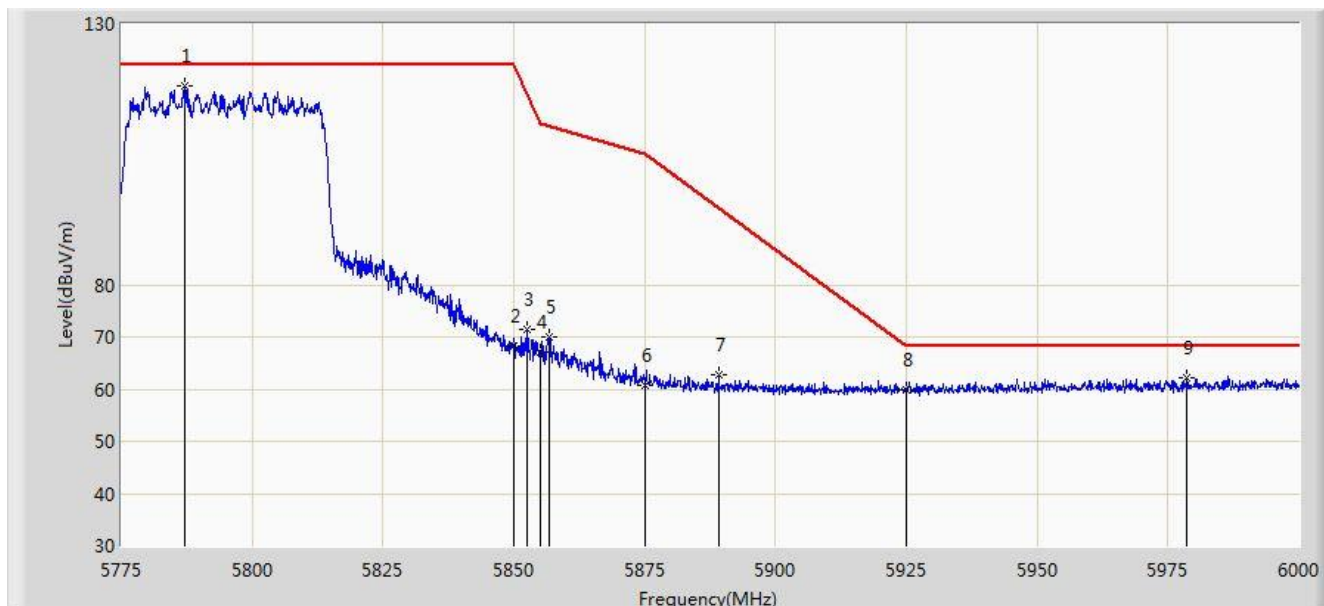


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5787.263	118.089	112.711	N/A	N/A	5.378	PK
2			5850.000	68.261	62.535	-53.939	122.200	5.726	PK
3			5852.400	71.343	65.608	-45.383	116.727	5.736	PK
4			5855.000	67.059	61.313	-43.741	110.800	5.746	PK
5			5856.900	70.060	64.306	-40.207	110.267	5.754	PK
6			5875.000	60.859	55.039	-44.341	105.200	5.820	PK
7			5889.075	62.865	56.997	-31.888	94.753	5.869	PK
8			5925.000	59.758	53.792	-8.442	68.200	5.967	PK
9			5978.625	62.220	56.145	-5.980	68.200	6.075	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/30 - 08:00
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11ax-HE80 at Channel 5210MHz	

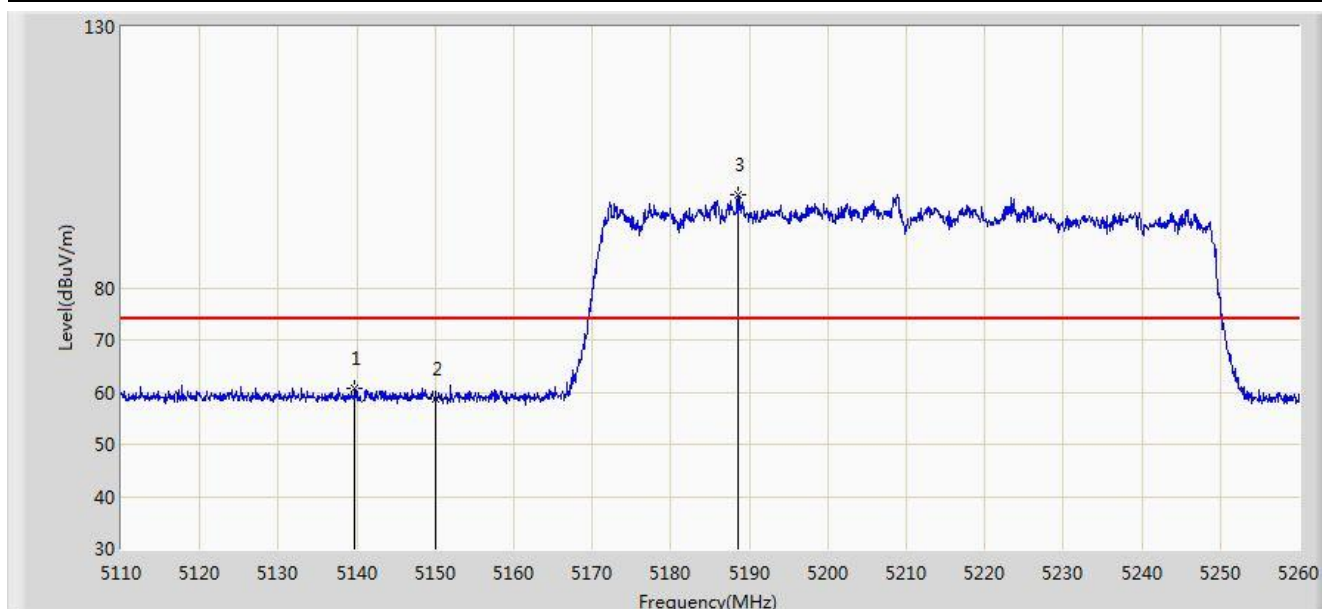


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5139.700	60.597	56.422	-13.403	74.000	4.175	PK
2			5150.000	58.614	54.445	-15.386	74.000	4.170	PK
3		*	5188.600	97.939	93.901	N/A	N/A	4.038	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/30 - 08:01
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11ax-HE80 at Channel 5210MHz	

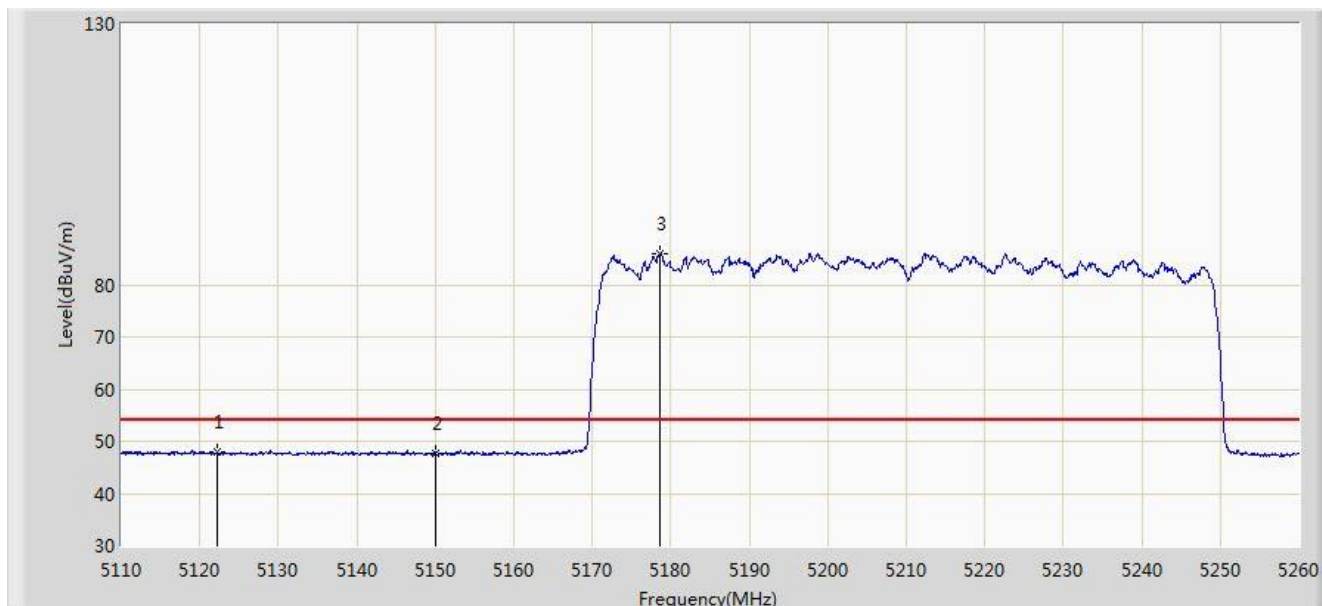


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5122.300	47.892	43.717	-6.108	54.000	4.175	AV
2			5150.000	47.679	43.510	-6.321	54.000	4.170	AV
3		*	5178.700	86.078	82.005	N/A	N/A	4.073	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/30 - 07:59
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11ax-HE80 at Channel 5210MHz	

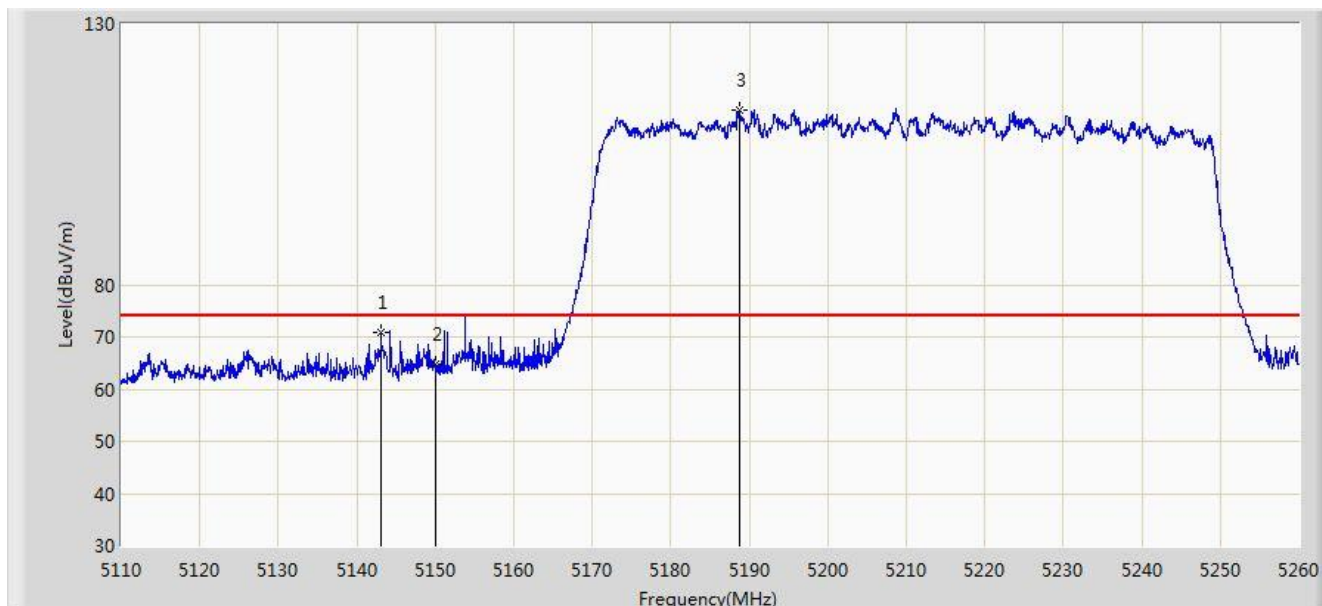


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5143.075	70.760	66.584	-3.240	74.000	4.176	PK
2			5150.000	64.773	60.604	-9.227	74.000	4.170	PK
3		*	5188.750	113.527	109.489	N/A	N/A	4.038	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/30 - 07:57
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11ax-HE80 at Channel 5210MHz	

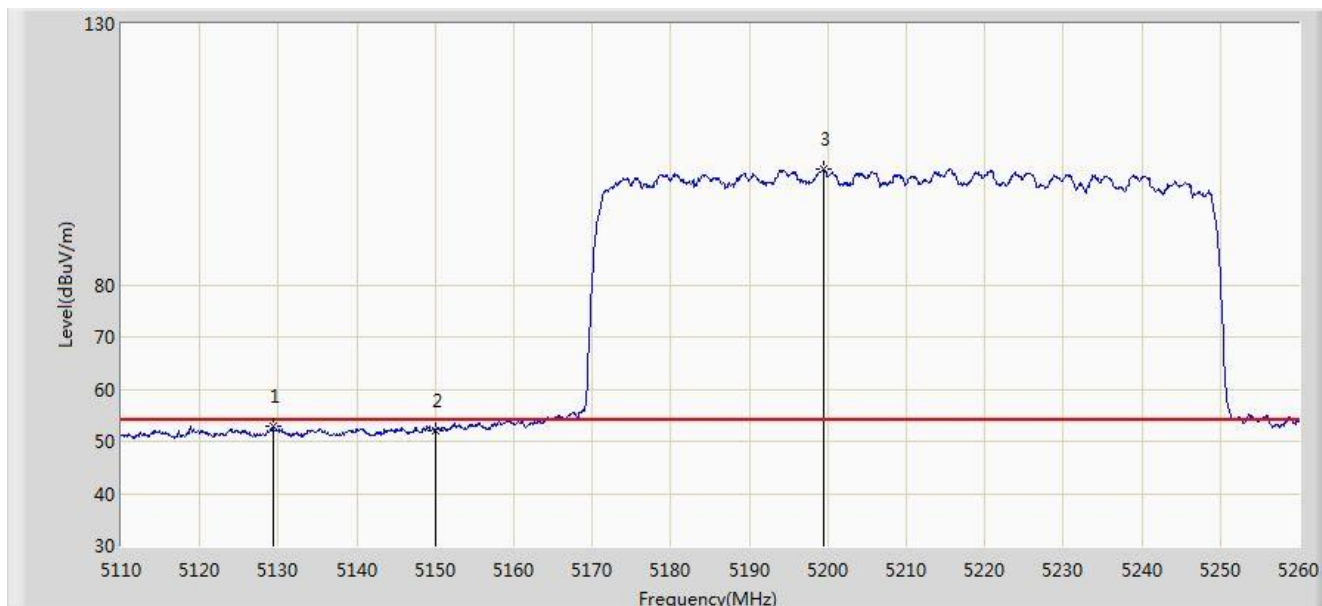


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5129.275	53.017	48.842	-0.983	54.000	4.174	AV
2			5150.000	52.160	47.991	-1.840	54.000	4.170	AV
3		*	5199.400	102.230	98.230	N/A	N/A	4.001	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/30 - 08:11
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11ax-HE80 at Channel 5290MHz	

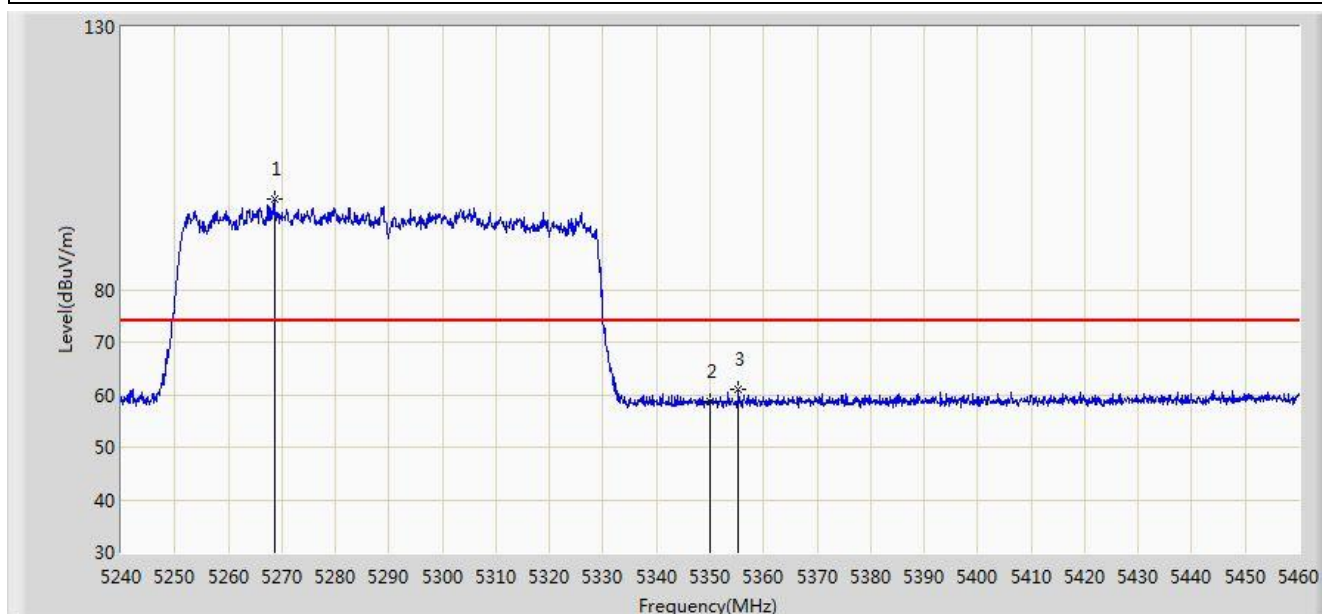


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5268.600	97.259	93.423	N/A	N/A	3.836	PK
2			5350.000	58.679	54.774	-15.321	74.000	3.904	PK
3			5355.280	61.151	57.237	-12.849	74.000	3.915	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/30 - 08:12
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11ax-HE80 at Channel 5290MHz	

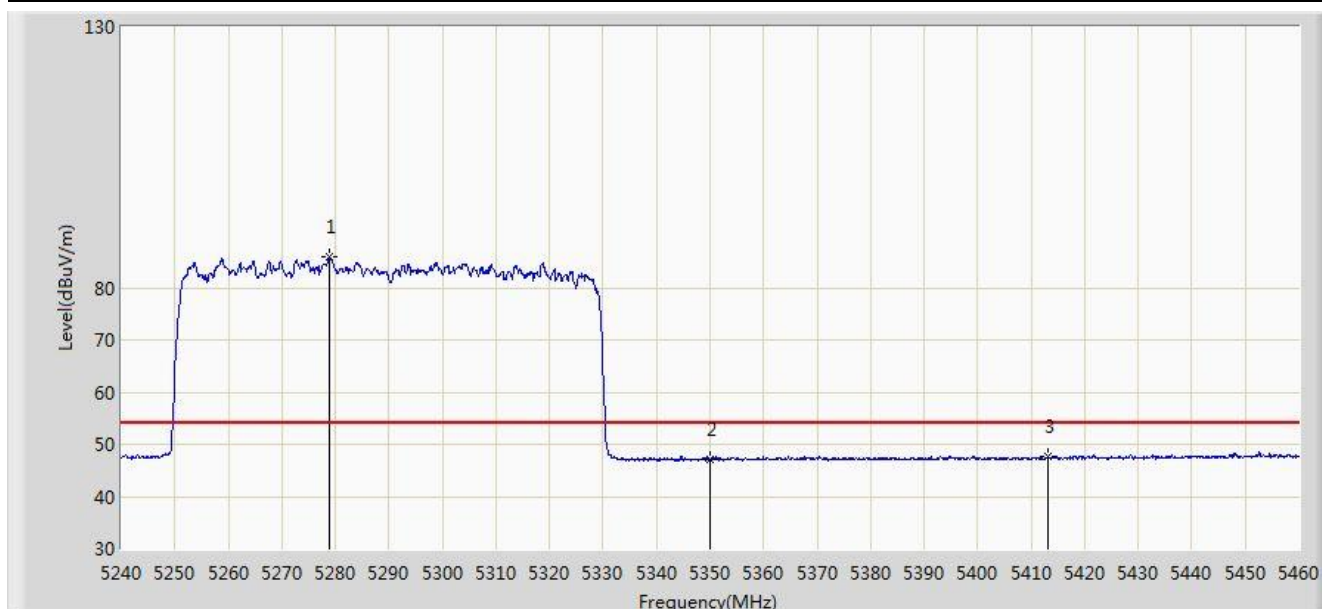


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5278.940	85.868	82.040	N/A	N/A	3.827	AV
2			5350.000	46.972	43.067	-7.028	54.000	3.904	AV
3			5413.140	47.639	43.601	-6.361	54.000	4.038	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/30 - 08:09
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11ax-HE80 at Channel 5290MHz	

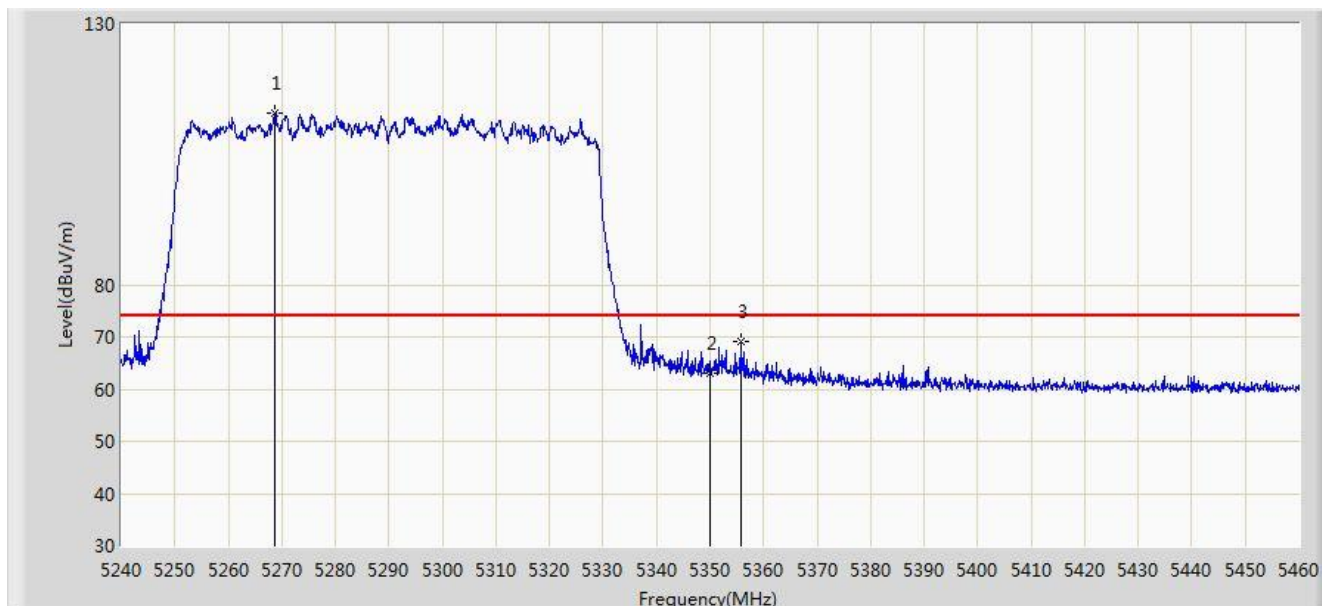


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5268.600	113.030	109.194	N/A	N/A	3.836	PK
2			5350.000	63.110	59.205	-10.890	74.000	3.904	PK
3			5355.720	69.006	65.091	-4.994	74.000	3.915	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/30 - 08:07
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11ax-HE80 at Channel 5290MHz	

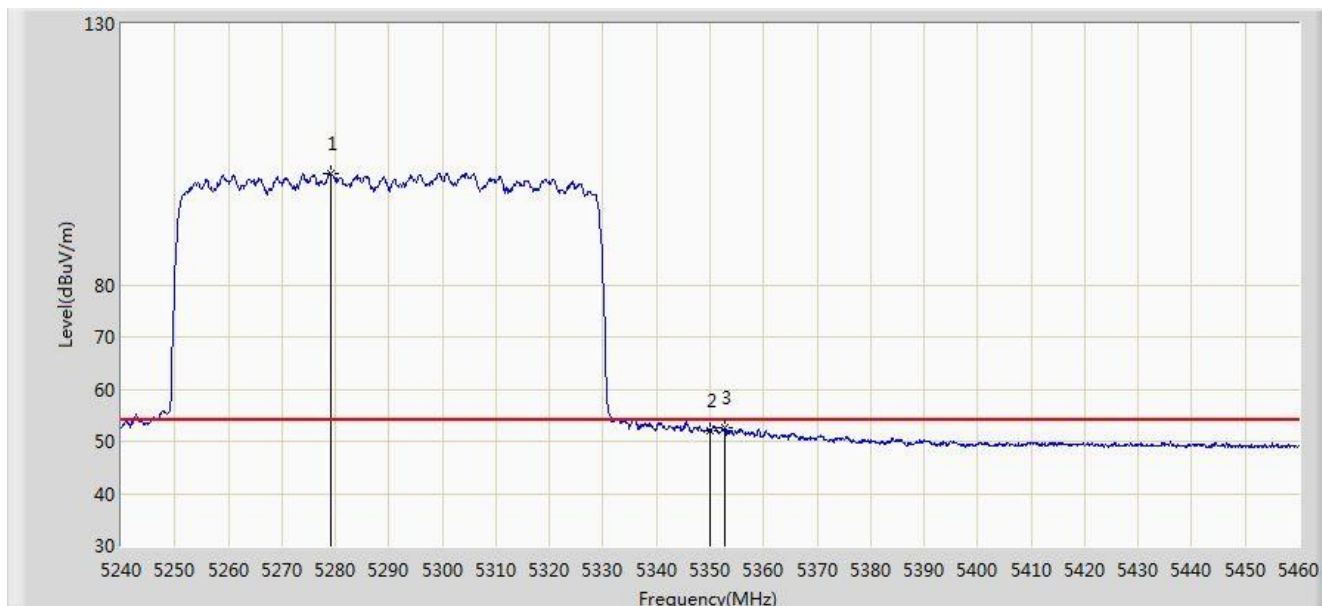


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5279.050	101.346	97.518	N/A	N/A	3.827	AV
2			5350.000	51.980	48.075	-2.020	54.000	3.904	AV
3			5352.860	52.615	48.705	-1.385	54.000	3.911	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/30 - 08:23
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11ax-HE80 at Channel 5530MHz	

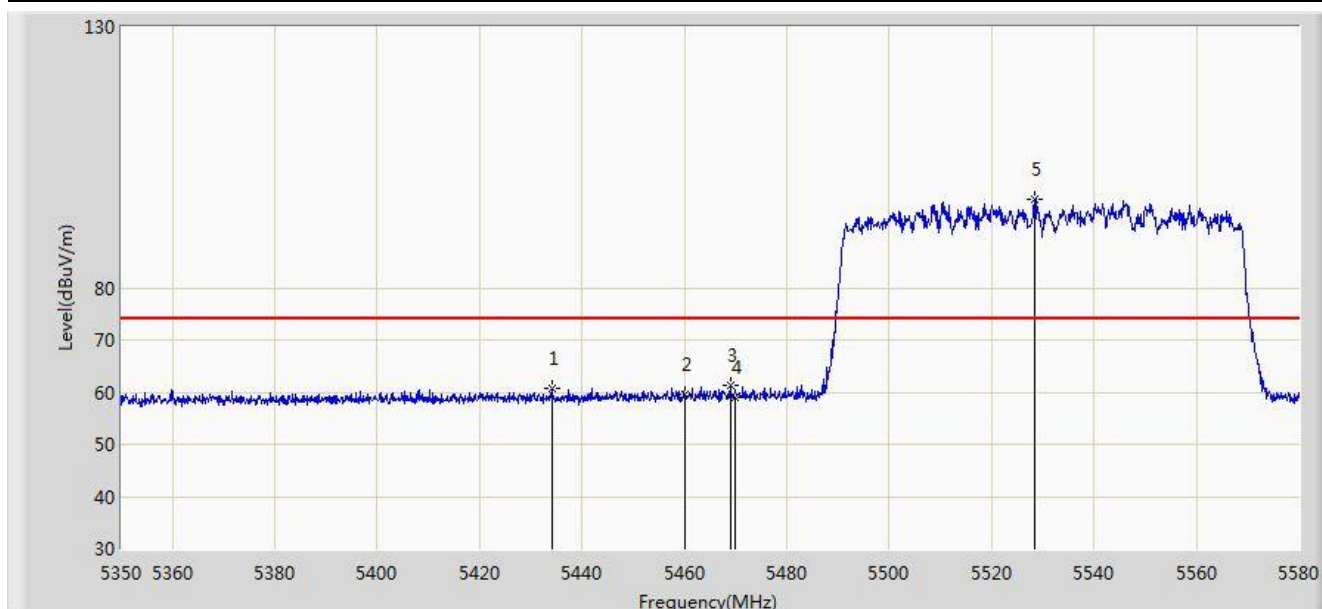


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5434.180	60.621	56.514	-13.379	74.000	4.106	PK
2			5460.000	59.485	55.305	-14.515	74.000	4.180	PK
3			5468.910	61.399	57.199	-6.801	68.200	4.200	PK
4			5470.000	59.098	54.896	-9.102	68.200	4.202	PK
5		*	5528.365	96.897	92.541	N/A	N/A	4.356	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/30 - 08:22
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11ax-HE80 at Channel 5530MHz	

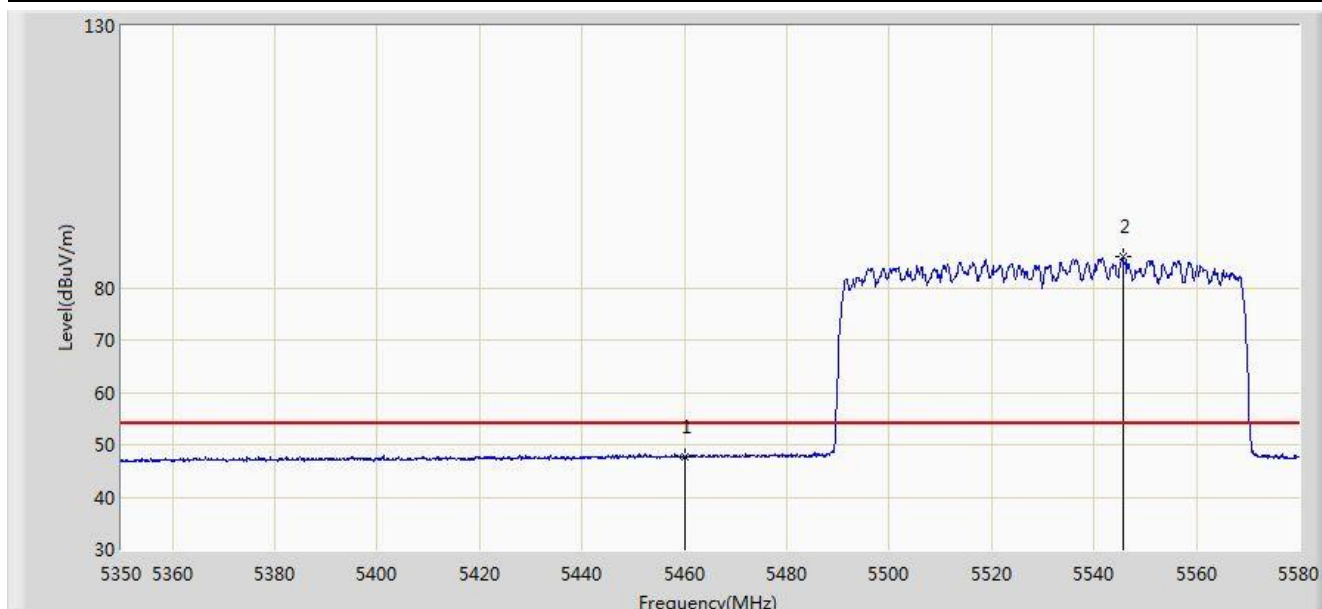


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	47.616	43.436	-6.384	54.000	4.180	AV
2		*	5545.615	85.817	81.411	N/A	N/A	4.406	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/30 - 08:19
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11ax-HE80 at Channel 5530MHz	

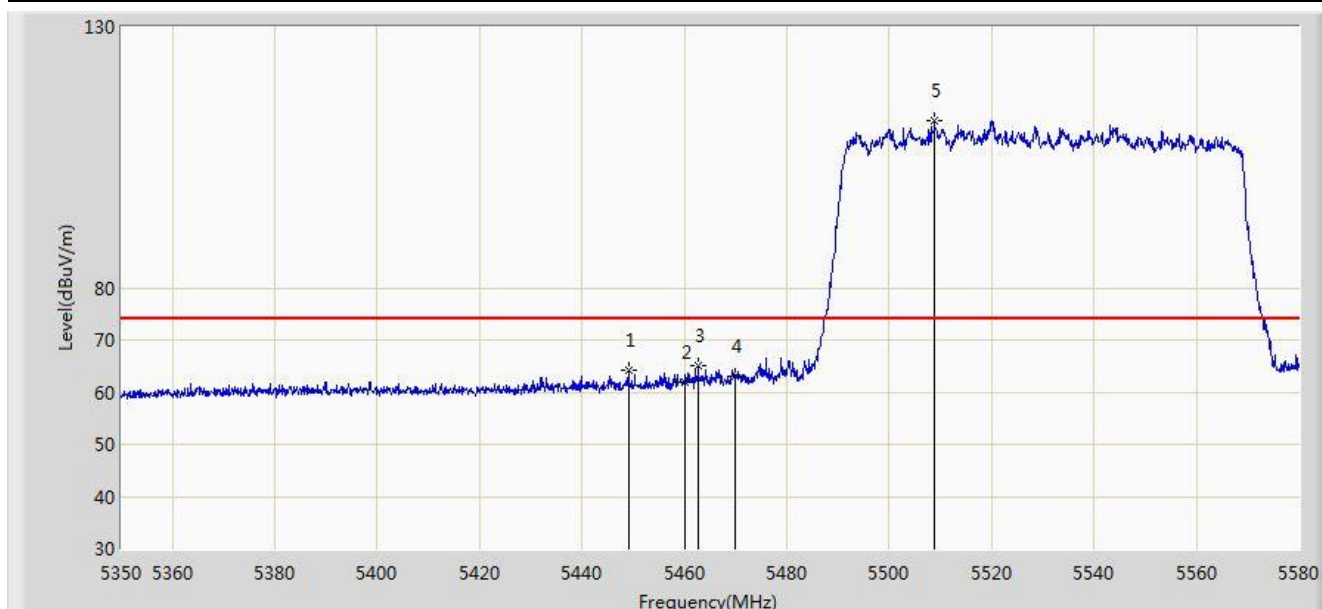


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5449.015	64.288	60.136	-9.712	74.000	4.152	PK
2			5460.000	61.935	57.755	-12.065	74.000	4.180	PK
3			5462.700	65.061	60.875	-3.139	68.200	4.186	PK
4			5470.000	63.058	58.856	-5.142	68.200	4.202	PK
5		*	5508.815	111.927	107.629	N/A	N/A	4.298	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/30 - 08:21
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11ax-HE80 at Channel 5530MHz	

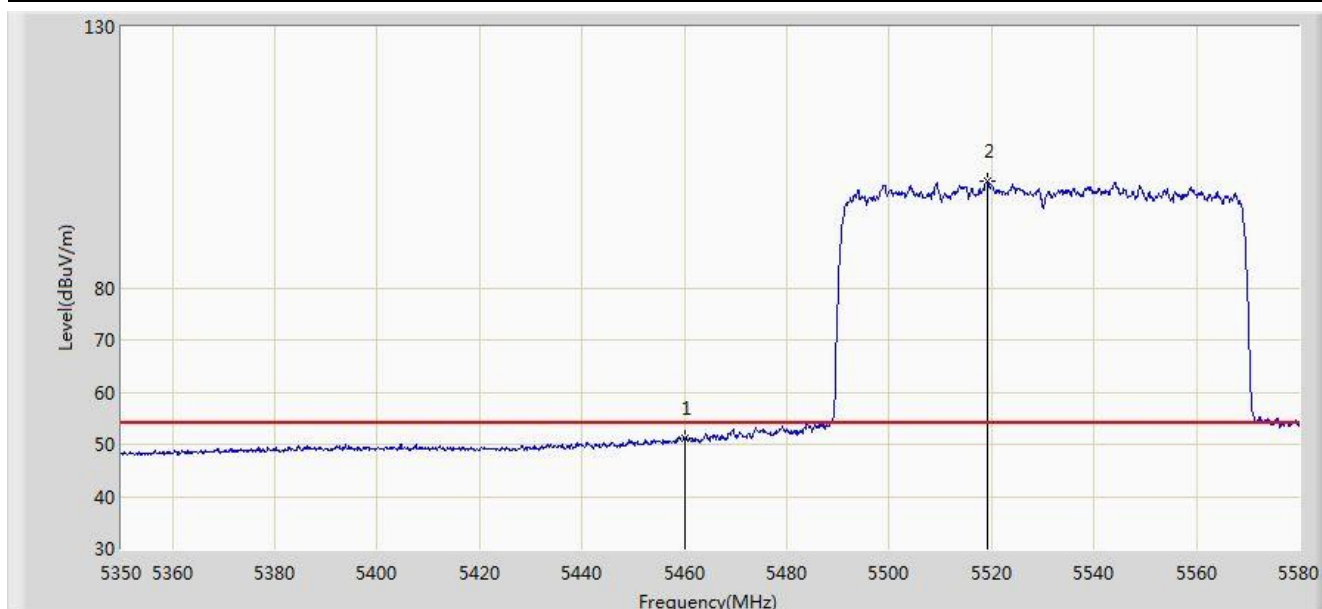


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	51.019	46.839	-2.981	54.000	4.180	AV
2		*	5519.050	100.540	96.212	N/A	N/A	4.328	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/30 - 08:29
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11ax-HE80 at Channel 5610MHz	

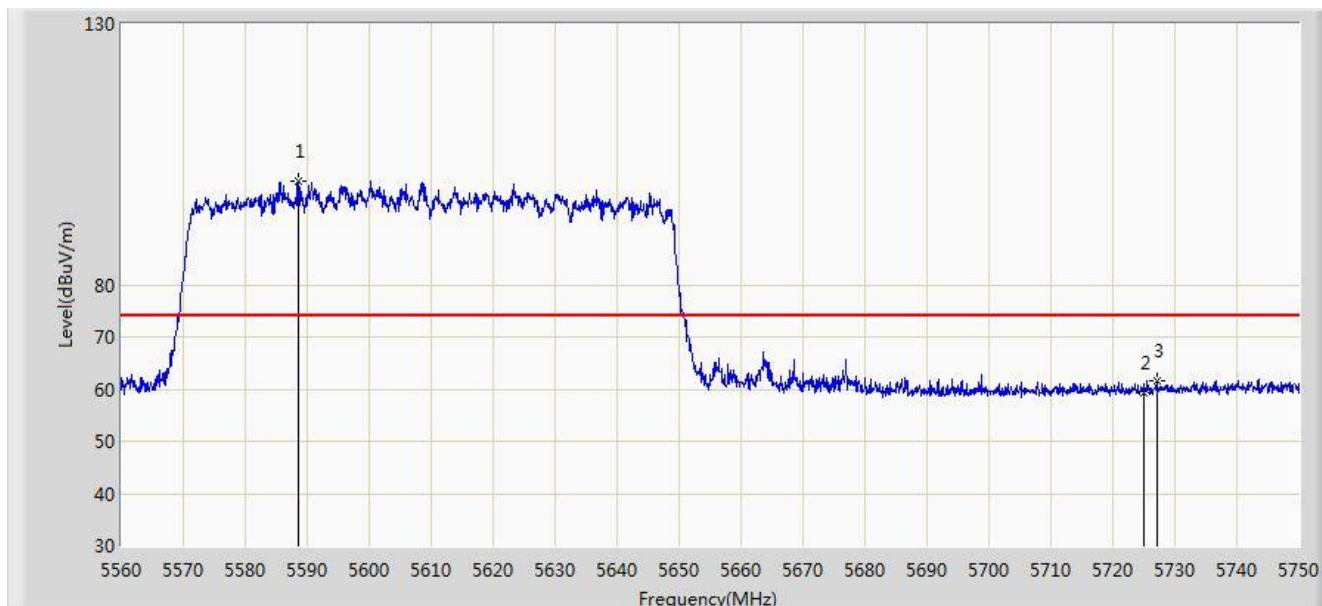


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5588.500	99.918	95.418	N/A	N/A	4.500	PK
2			5725.000	59.379	54.350	-14.621	74.000	5.029	PK
3			5727.105	61.699	56.657	-12.301	74.000	5.043	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/30 - 08:30
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11ax-HE80 at Channel 5610MHz	

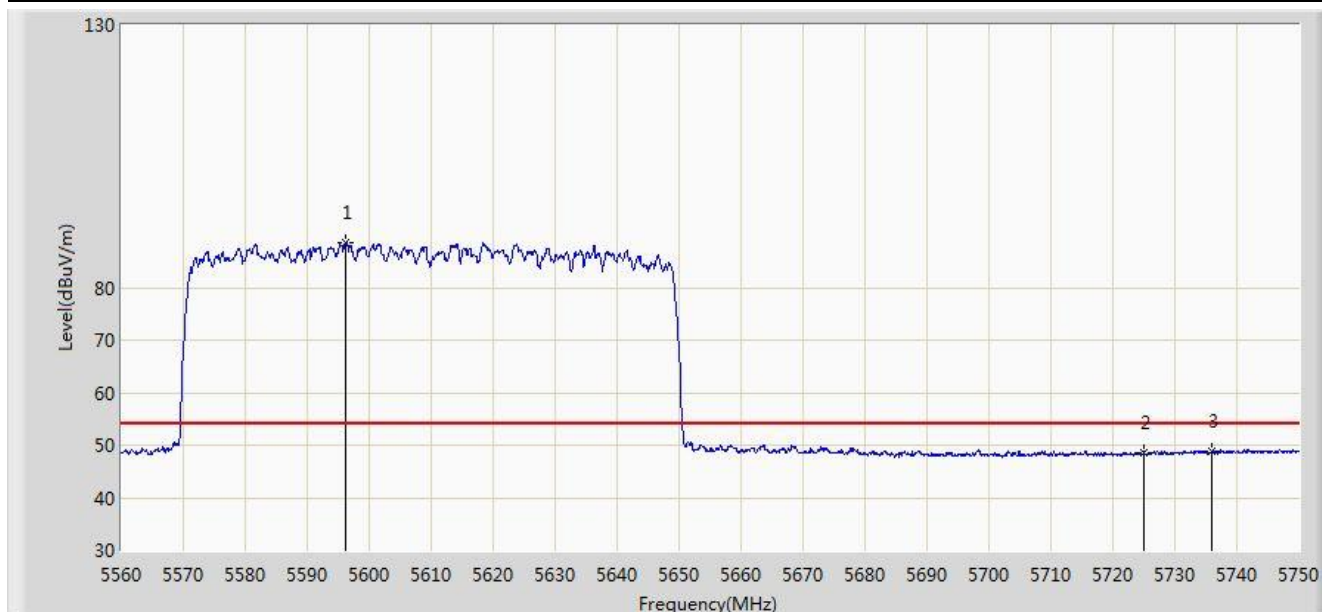


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5596.290	88.676	84.158	N/A	N/A	4.519	AV
2			5725.000	48.478	43.449	-5.522	54.000	5.029	AV
3			5735.940	48.857	43.758	-5.143	54.000	5.098	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/30 - 08:28
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11ax-HE80 at Channel 5610MHz	

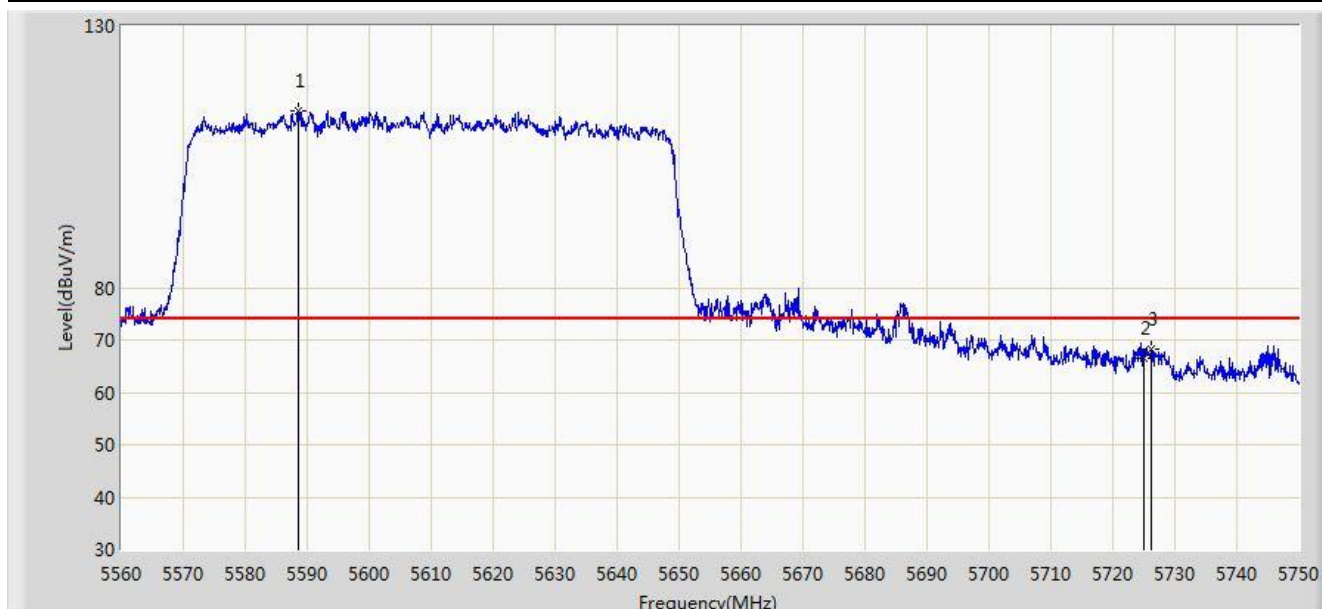


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5588.595	113.875	109.375	N/A	N/A	4.500	PK
2			5725.000	66.511	61.482	-7.489	74.000	5.029	PK
3			5726.250	68.374	63.337	-5.626	74.000	5.037	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/30 - 08:27
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11ax-HE80 at Channel 5610MHz	

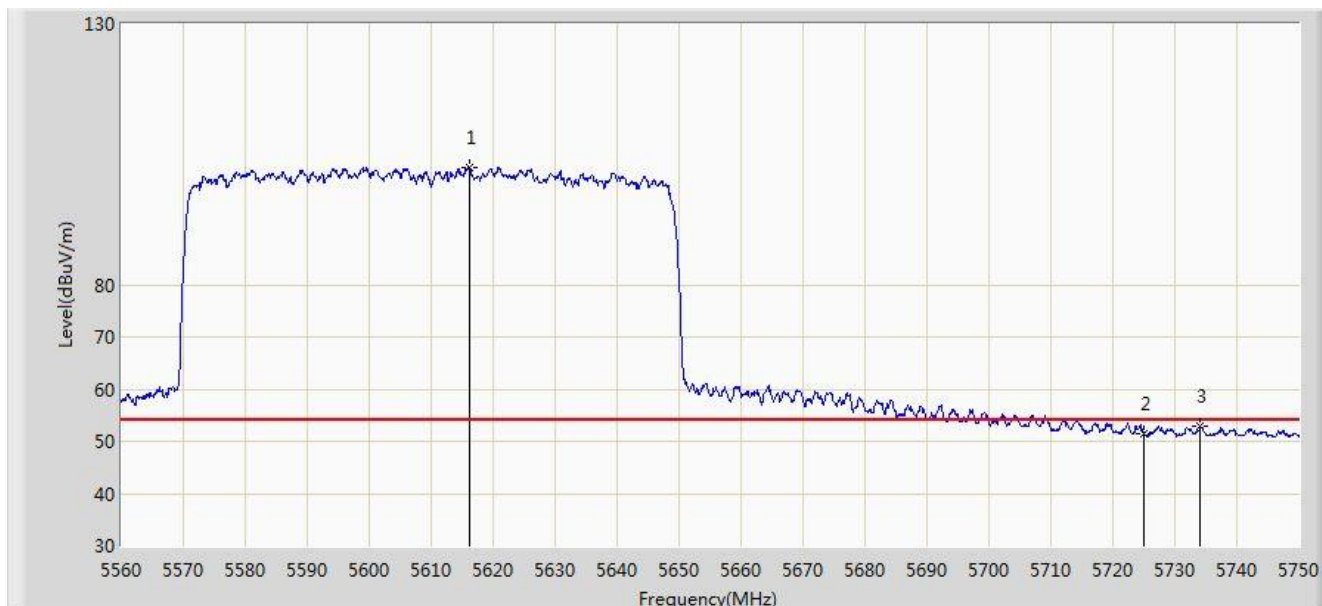


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5616.145	102.585	98.016	N/A	N/A	4.569	AV
2			5725.000	51.534	46.505	-2.466	54.000	5.029	AV
3			5734.135	52.879	47.792	-1.121	54.000	5.087	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/30 - 08:34
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11ax-HE80 at Channel 5775MHz	

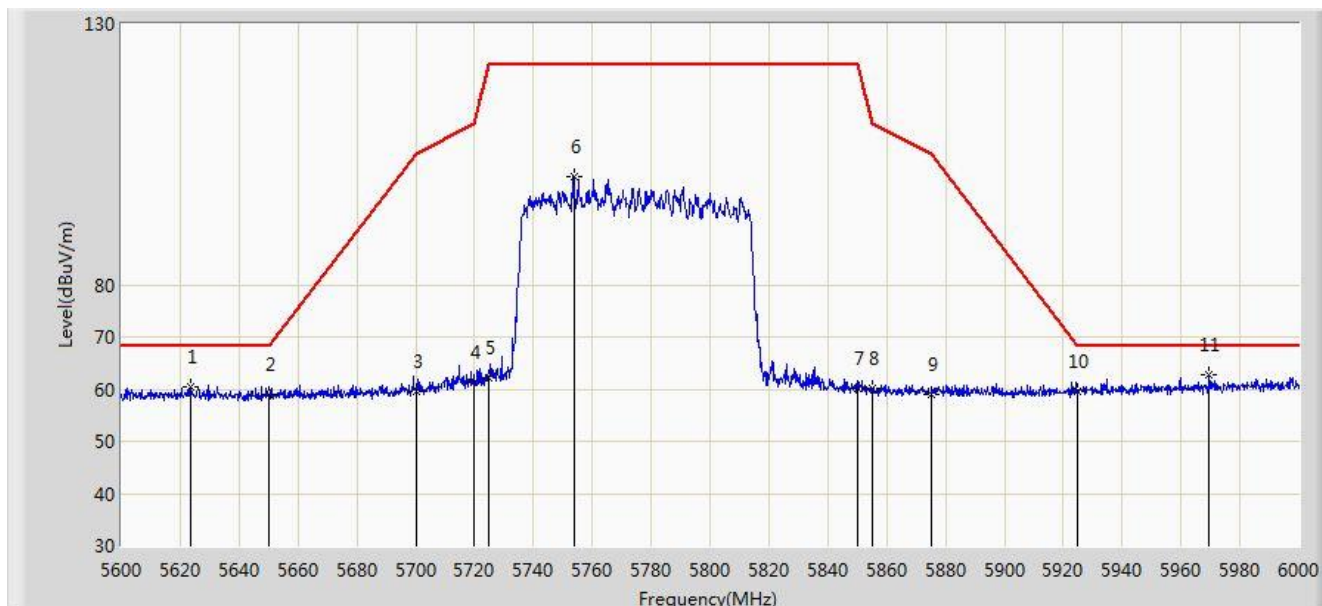


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5623.600	60.427	55.836	-7.773	68.200	4.591	PK
2			5650.000	58.923	54.252	-9.277	68.200	4.671	PK
3			5700.000	59.519	54.641	-45.681	105.200	4.878	PK
4			5720.000	61.216	56.219	-49.584	110.800	4.997	PK
5			5725.000	62.253	57.224	-59.947	122.200	5.029	PK
6			5753.800	100.799	95.594	N/A	N/A	5.205	PK
7			5850.000	60.117	54.391	-62.083	122.200	5.726	PK
8			5855.000	60.031	54.285	-50.769	110.800	5.746	PK
9			5875.000	59.107	53.287	-46.093	105.200	5.820	PK
10			5925.000	59.671	53.705	-8.529	68.200	5.967	PK
11		*	5969.600	62.841	56.781	-5.359	68.200	6.061	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/30 - 08:32
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11ax-HE80 at Channel 5775MHz	

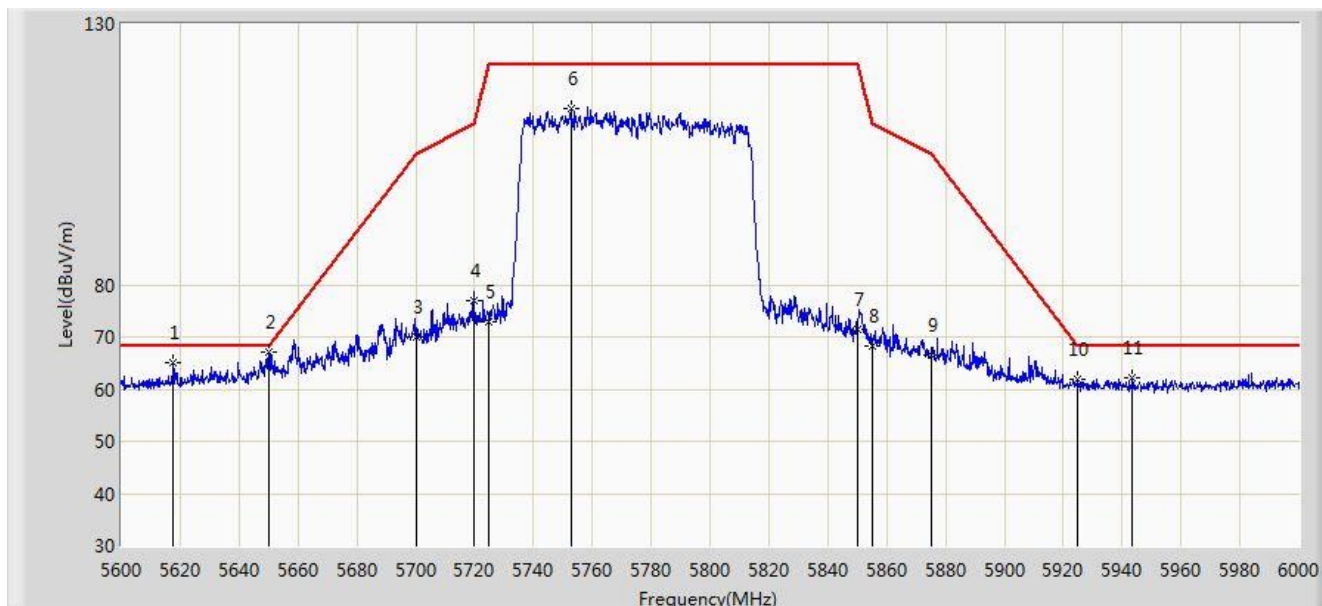


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5617.600	65.195	60.621	-3.005	68.200	4.574	PK
2		*	5650.000	67.147	62.476	-1.053	68.200	4.671	PK
3			5700.000	69.962	65.084	-35.238	105.200	4.878	PK
4			5720.000	77.013	72.016	-33.787	110.800	4.997	PK
5			5725.000	72.970	67.941	-49.230	122.200	5.029	PK
6			5752.800	113.734	108.535	N/A	N/A	5.199	PK
7			5850.000	71.314	65.588	-50.886	122.200	5.726	PK
8			5855.000	68.309	62.563	-42.491	110.800	5.746	PK
9			5875.000	66.390	60.570	-38.810	105.200	5.820	PK
10			5925.000	61.911	55.945	-6.289	68.200	5.967	PK
11			5943.600	62.244	56.232	-5.956	68.200	6.012	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/30 - 08:44
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11ax-HE160 at Channel 5250MHz	

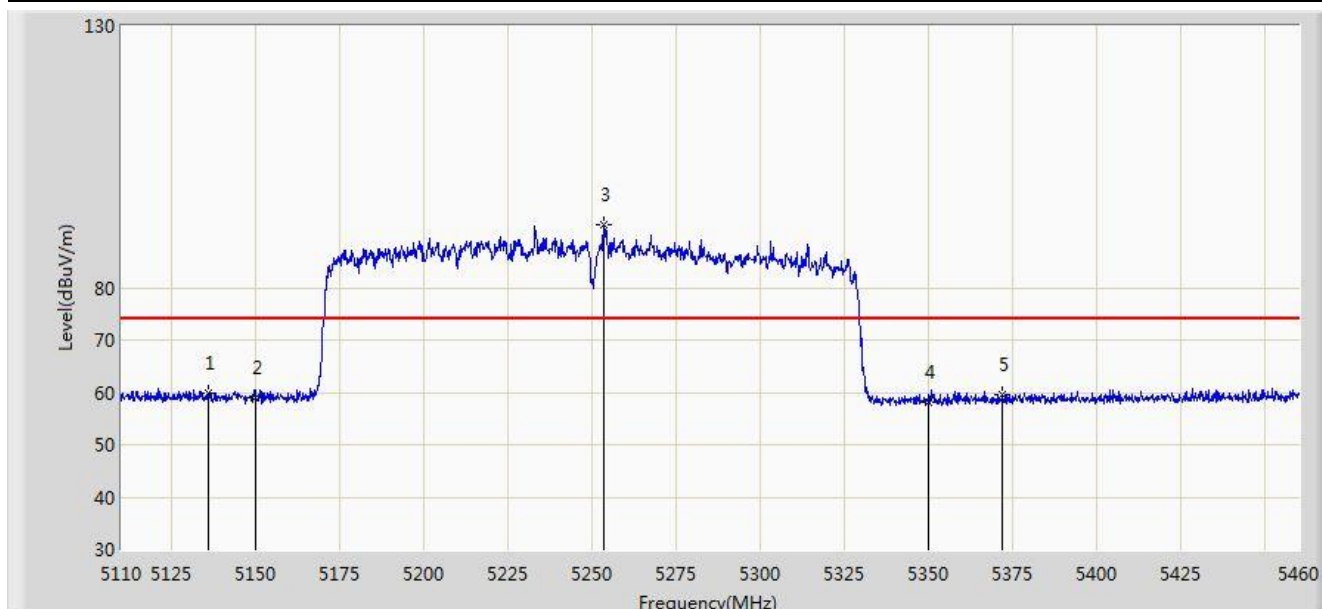


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5135.900	59.976	55.801	-14.024	74.000	4.175	PK
2			5150.000	59.028	54.859	-14.972	74.000	4.170	PK
3		*	5253.325	91.965	88.117	N/A	N/A	3.848	PK
4			5350.000	58.214	54.309	-15.786	74.000	3.904	PK
5			5371.800	59.659	55.715	-14.341	74.000	3.944	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/30 - 08:45
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11ax-HE160 at Channel 5250MHz	

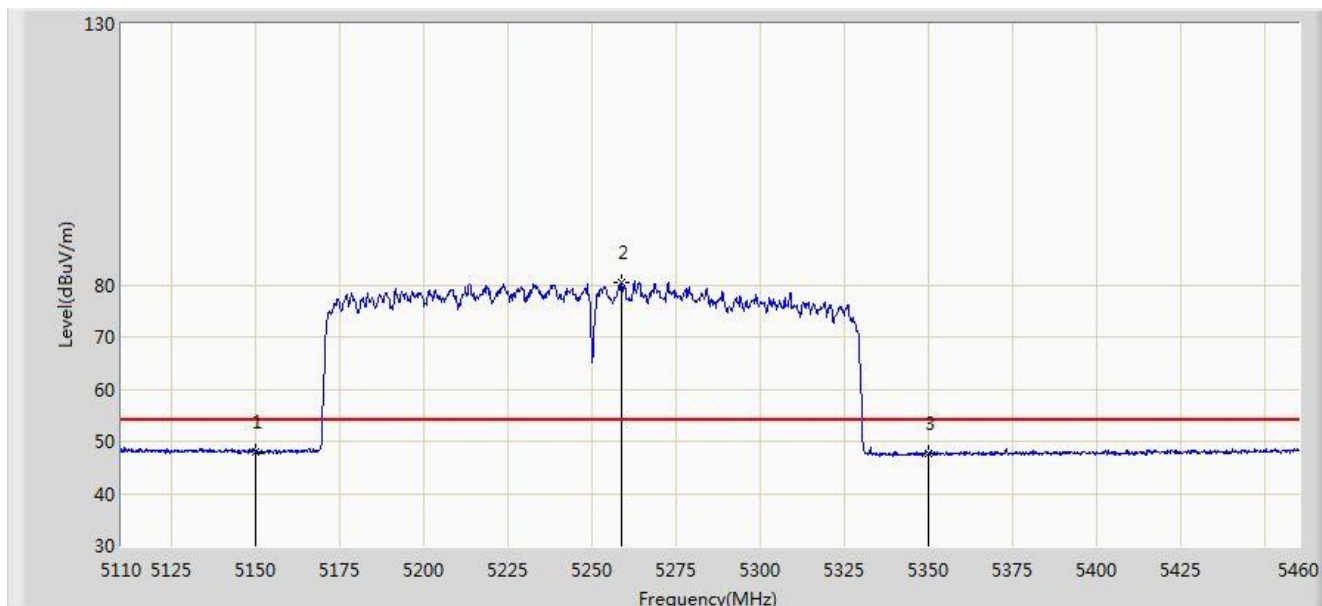


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	48.113	43.944	-5.887	54.000	4.170	AV
2		*	5258.575	80.499	76.655	N/A	N/A	3.844	AV
3			5350.000	47.570	43.665	-6.430	54.000	3.904	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/30 - 08:42
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11ax-HE160 at Channel 5250MHz	

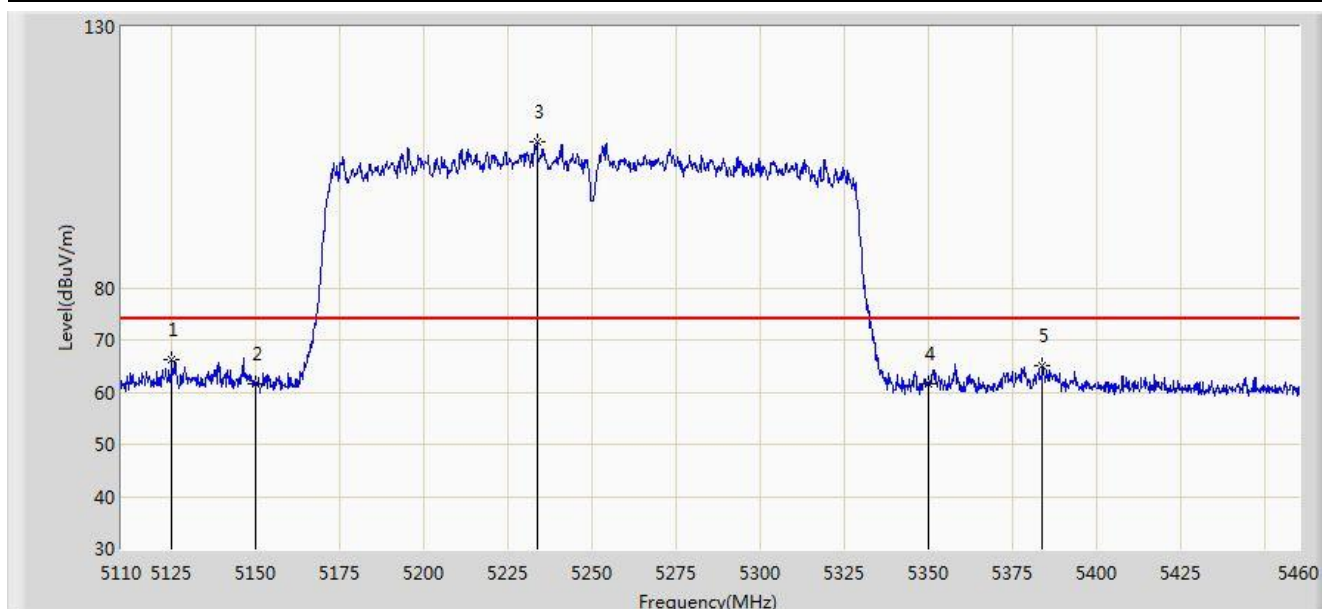


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5125.050	66.361	62.186	-7.639	74.000	4.175	PK
2			5150.000	61.600	57.431	-12.400	74.000	4.170	PK
3		*	5233.550	107.899	104.000	N/A	N/A	3.898	PK
4			5350.000	61.709	57.804	-12.291	74.000	3.904	PK
5			5383.875	65.008	61.041	-8.992	74.000	3.967	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/30 - 08:41
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11ax-HE160 at Channel 5250MHz	

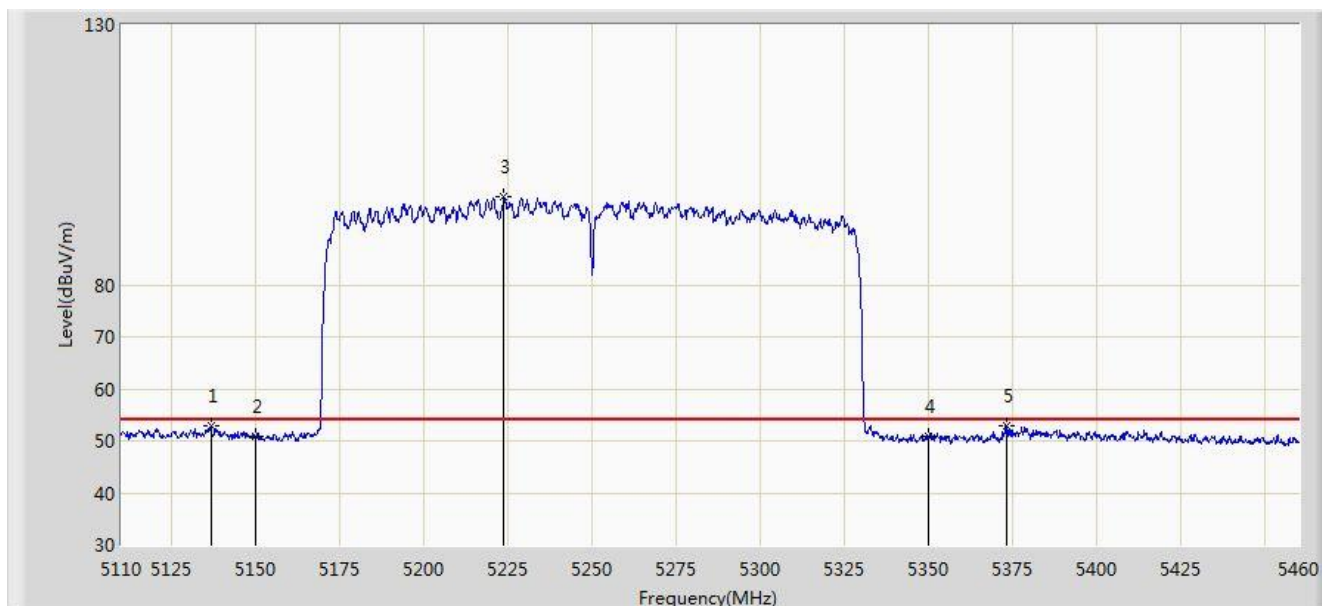


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5136.600	52.976	48.801	-1.024	54.000	4.175	AV
2			5150.000	50.748	46.579	-3.252	54.000	4.170	AV
3		*	5223.750	96.986	93.058	N/A	N/A	3.928	AV
4			5350.000	50.849	46.944	-3.151	54.000	3.904	AV
5			5373.375	52.960	49.013	-1.040	54.000	3.947	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/30 - 08:50
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11ax-HE160 at Channel 5570MHz	

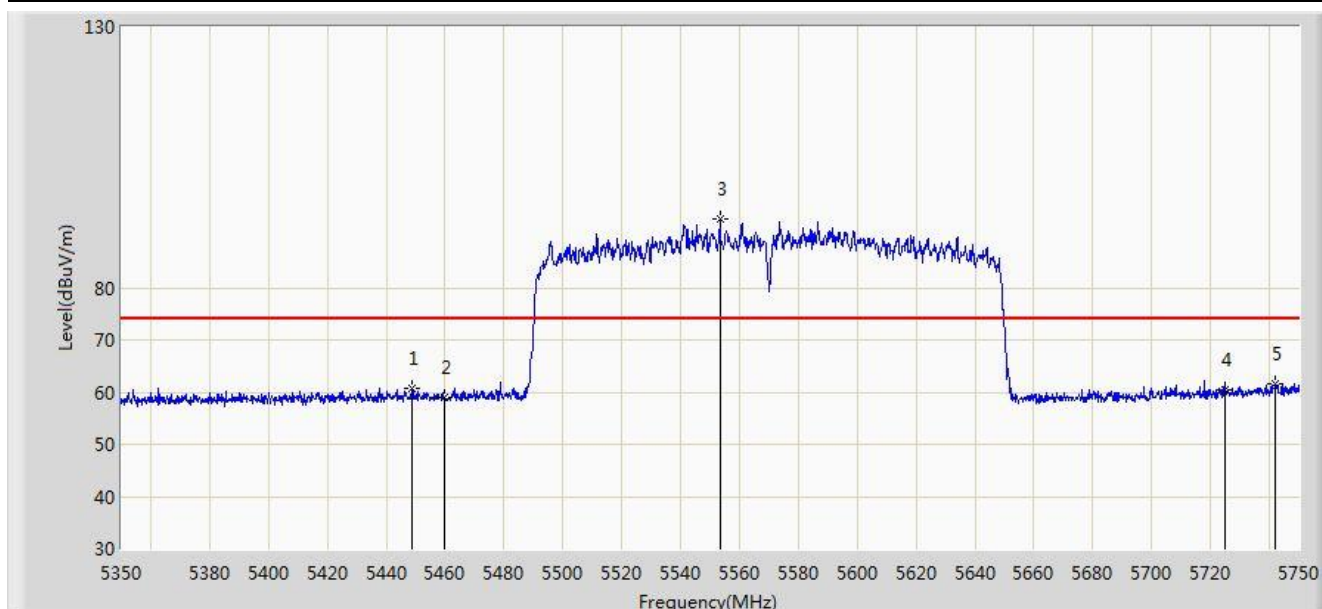


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5448.600	60.649	56.499	-13.351	74.000	4.150	PK
2			5460.000	59.030	54.850	-14.970	74.000	4.180	PK
3		*	5553.400	93.316	88.889	N/A	N/A	4.427	PK
4			5725.000	60.351	55.322	-13.649	74.000	5.029	PK
5			5742.000	61.605	56.468	-12.395	74.000	5.137	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/30 - 08:49
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11ax-HE160 at Channel 5570MHz	

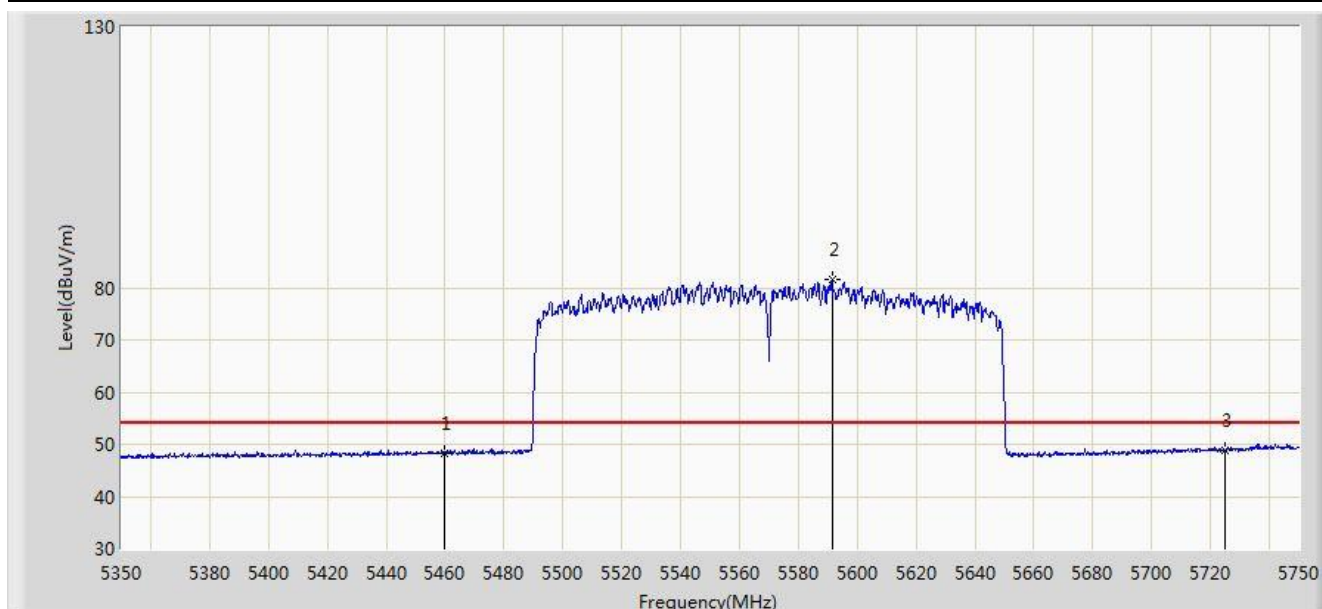


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	48.289	44.109	-5.711	54.000	4.180	AV
2		*	5591.600	81.518	77.011	N/A	N/A	4.507	AV
3			5725.000	48.813	43.784	-5.187	54.000	5.029	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/30 - 08:46
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11ax-HE160 at Channel 5570MHz	

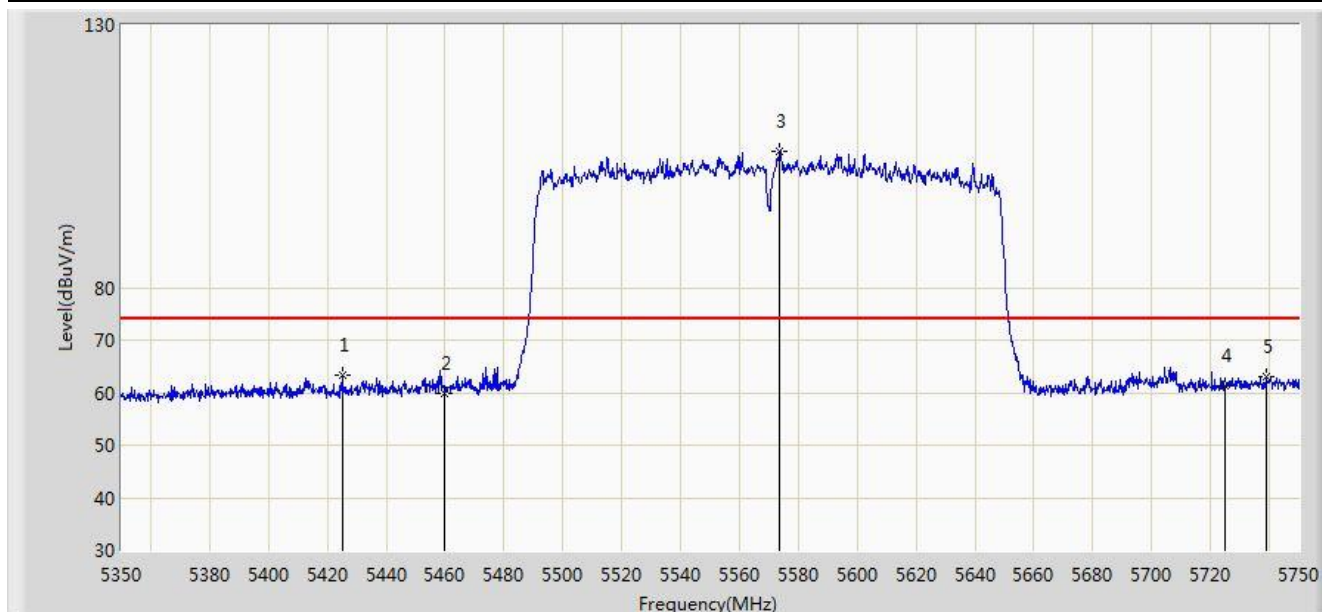


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5425.200	63.190	59.112	-10.810	74.000	4.078	PK
2			5460.000	59.850	55.670	-14.150	74.000	4.180	PK
3		*	5573.800	106.003	101.533	N/A	N/A	4.470	PK
4			5725.000	61.346	56.317	-12.654	74.000	5.029	PK
5			5739.200	63.116	57.996	-10.884	74.000	5.120	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/30 - 08:47
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11ax-HE160 at Channel 5570MHz	

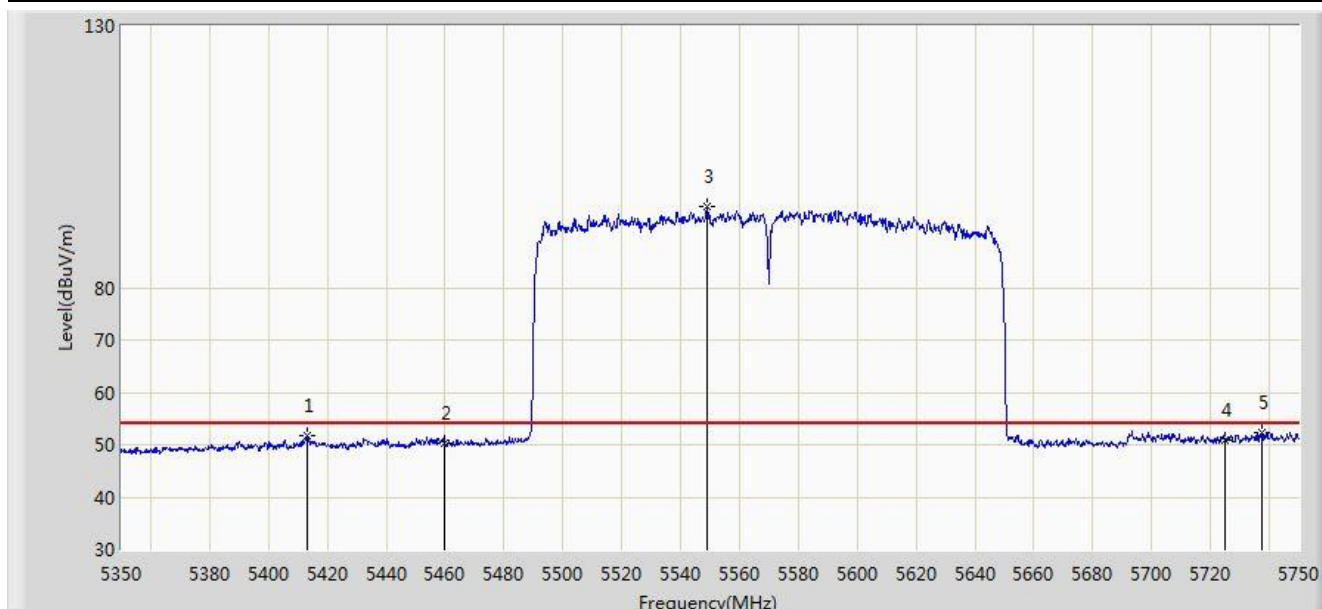


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5413.200	51.819	47.780	-2.181	54.000	4.039	AV
2			5460.000	50.174	45.994	-3.826	54.000	4.180	AV
3		*	5549.000	95.448	91.033	N/A	N/A	4.415	AV
4			5725.000	50.984	45.955	-3.016	54.000	5.029	AV
5			5737.400	52.406	47.298	-1.594	54.000	5.108	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

For APIN0514 - Directional Antenna (AP-ANT-48):

Site: AC1	Time: 2018/06/26 - 23:04
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11a at Channel 5180MHz	

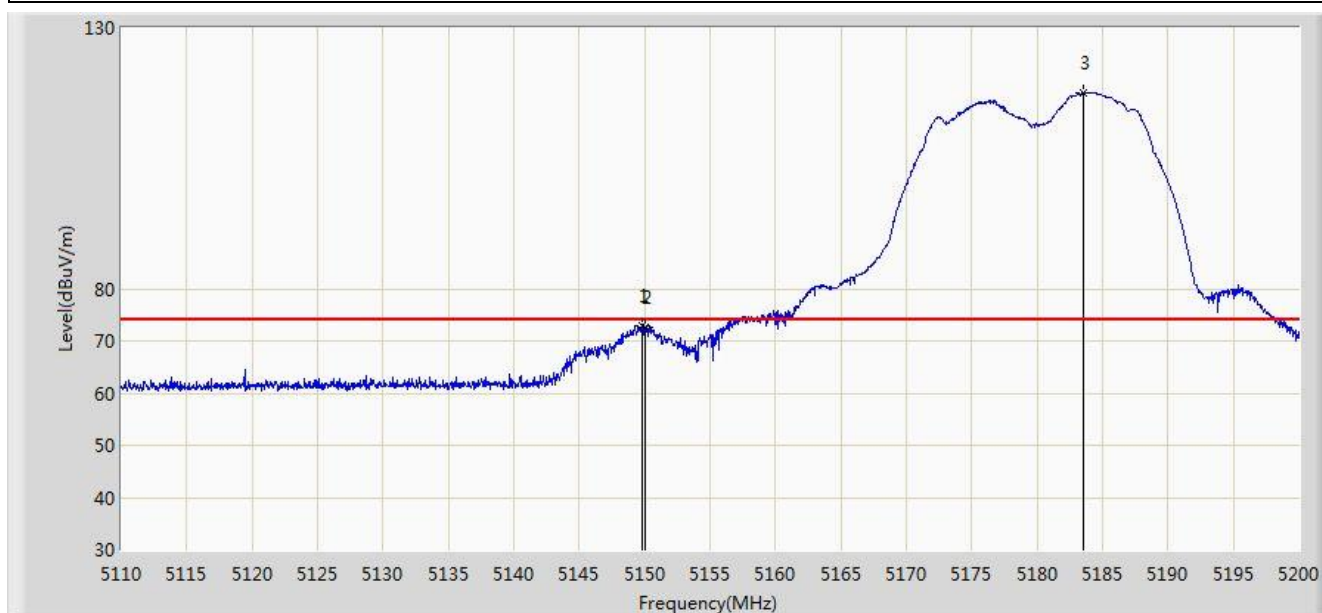


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5149.780	72.865	68.695	-1.135	74.000	4.169	PK
2			5150.000	72.497	68.328	-1.503	74.000	4.170	PK
3		*	5183.575	117.467	113.411	N/A	N/A	4.057	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/26 - 23:05
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11a at Channel 5180MHz	

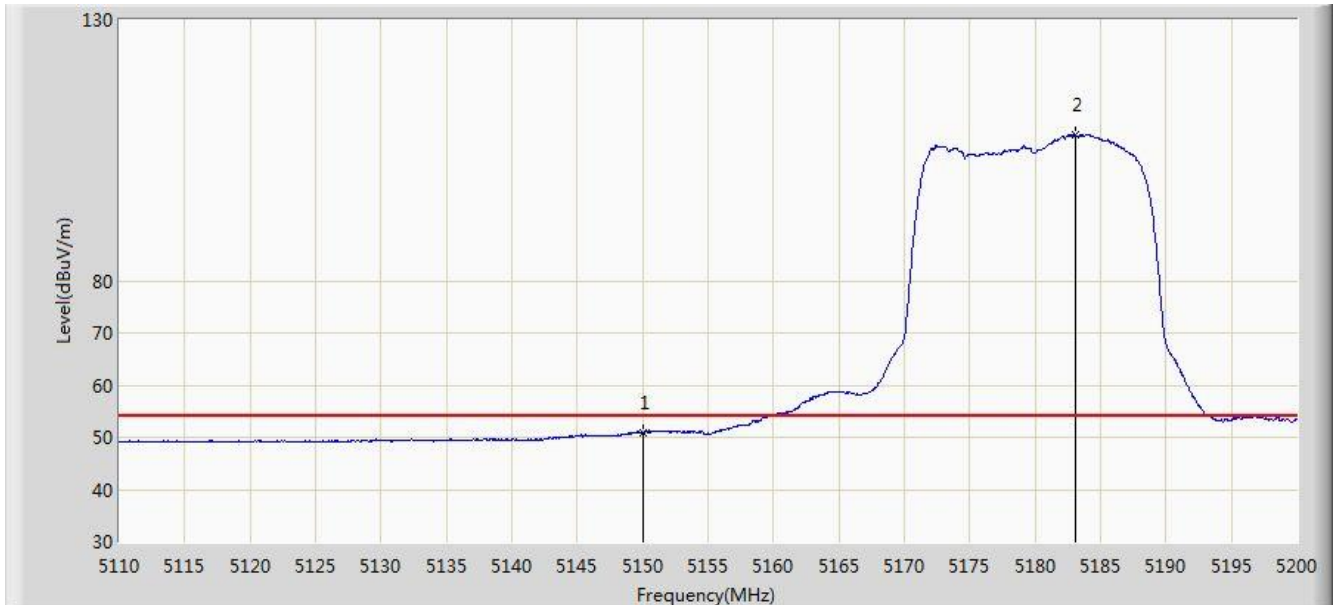


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	50.981	46.812	-3.019	54.000	4.170	AV
2		*	5183.035	107.861	103.803	N/A	N/A	4.057	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/26 - 22:54
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11a at Channel 5180MHz	

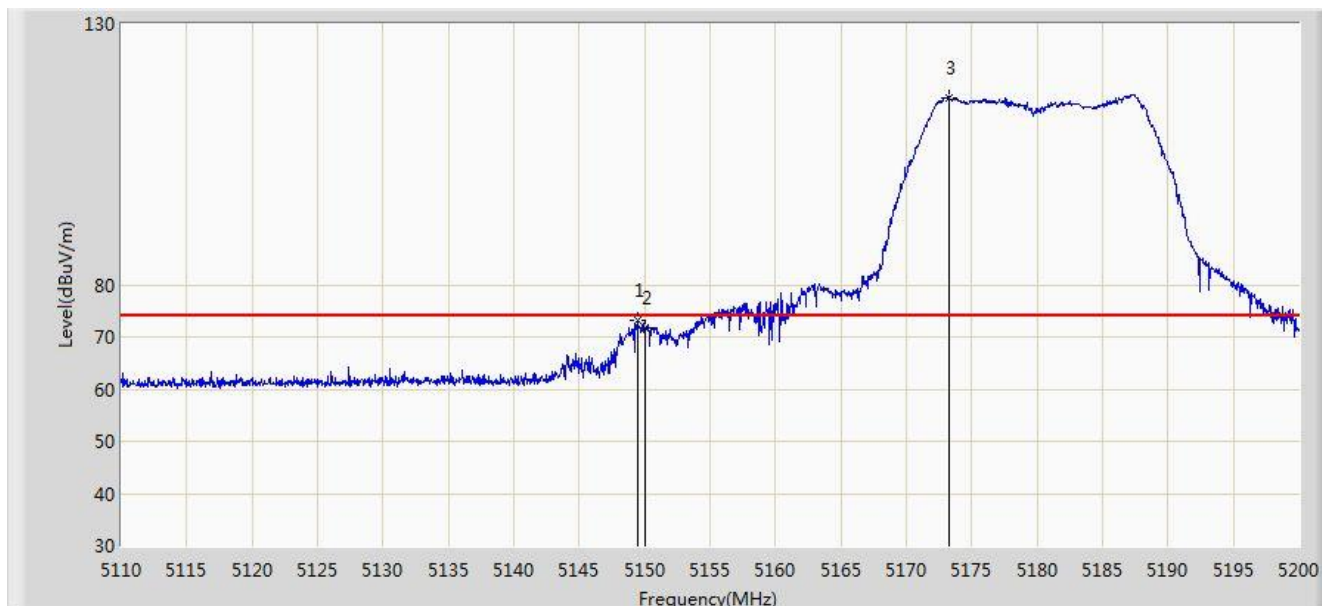


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5149.420	73.049	68.878	-0.951	74.000	4.171	PK
2			5150.000	71.697	67.528	-2.303	74.000	4.170	PK
3		*	5173.225	115.715	111.622	N/A	N/A	4.093	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/26 - 23:03
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11a at Channel 5180MHz	

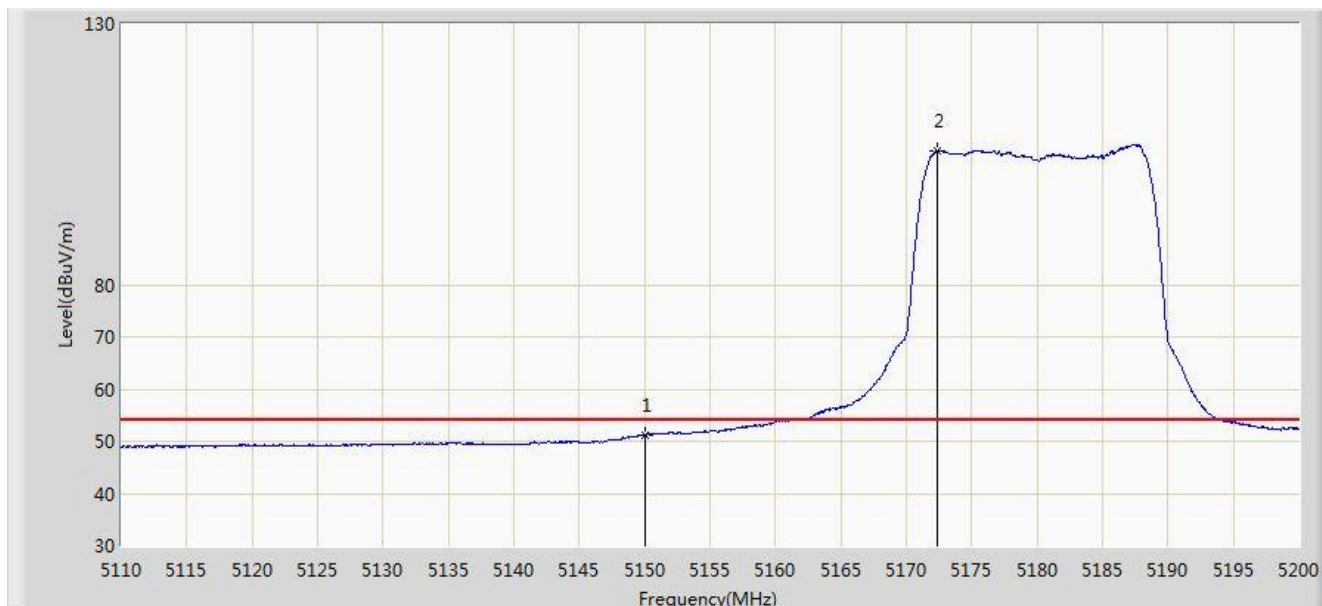


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	51.279	47.110	-2.721	54.000	4.170	AV
2		*	5172.415	105.638	101.542	N/A	N/A	4.096	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/26 - 23:11
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11a at Channel 5320MHz	

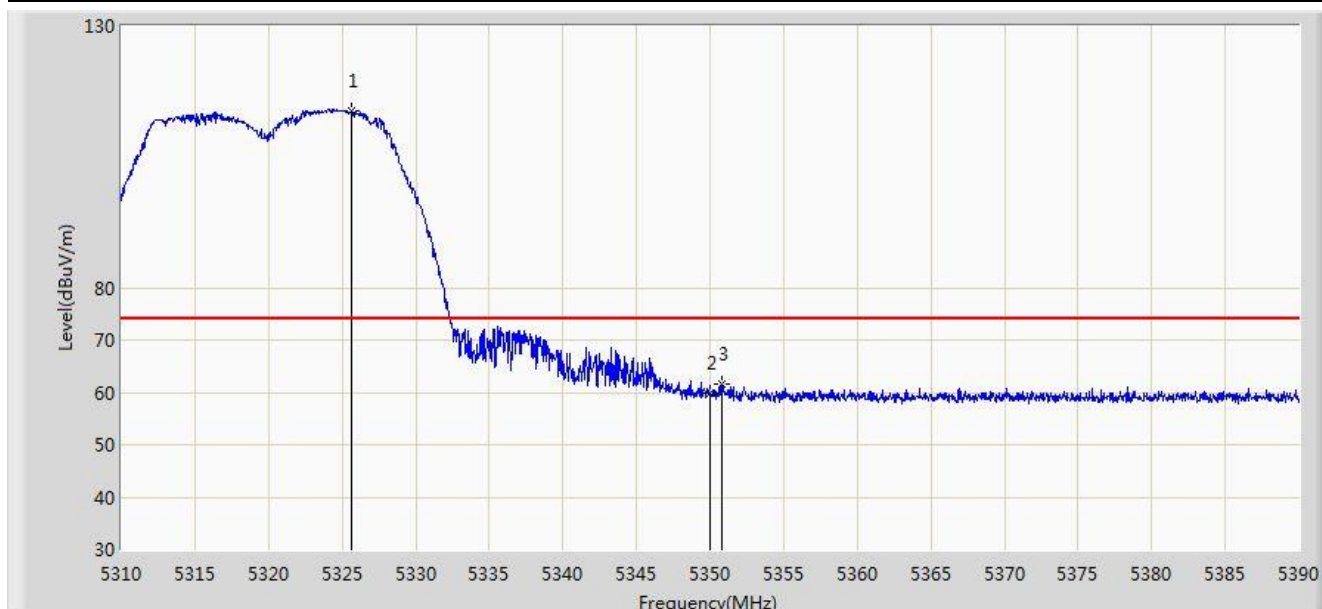


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5325.640	113.832	109.973	N/A	N/A	3.859	PK
2			5350.000	59.895	55.990	-14.105	74.000	3.904	PK
3			5350.840	61.722	57.816	-12.278	74.000	3.906	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/26 - 23:12
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11a at Channel 5320MHz	

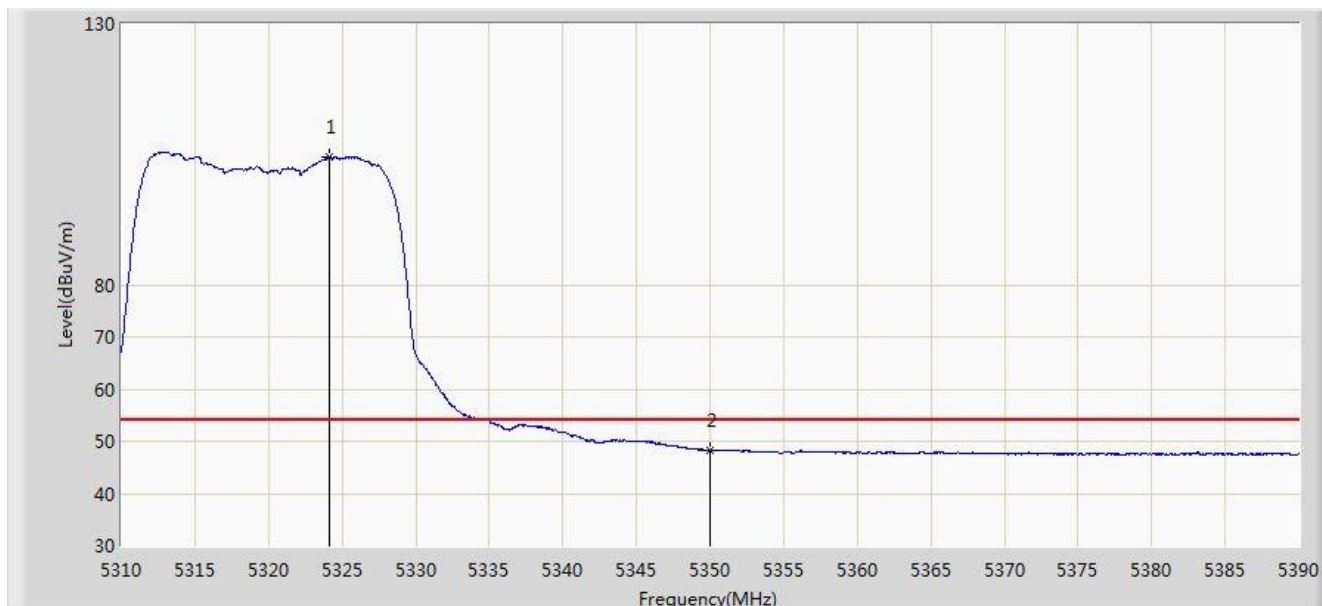


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5324.160	104.407	100.551	N/A	N/A	3.857	AV
2			5350.000	48.388	44.483	-5.612	54.000	3.904	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/26 - 23:07
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11a at Channel 5320MHz	

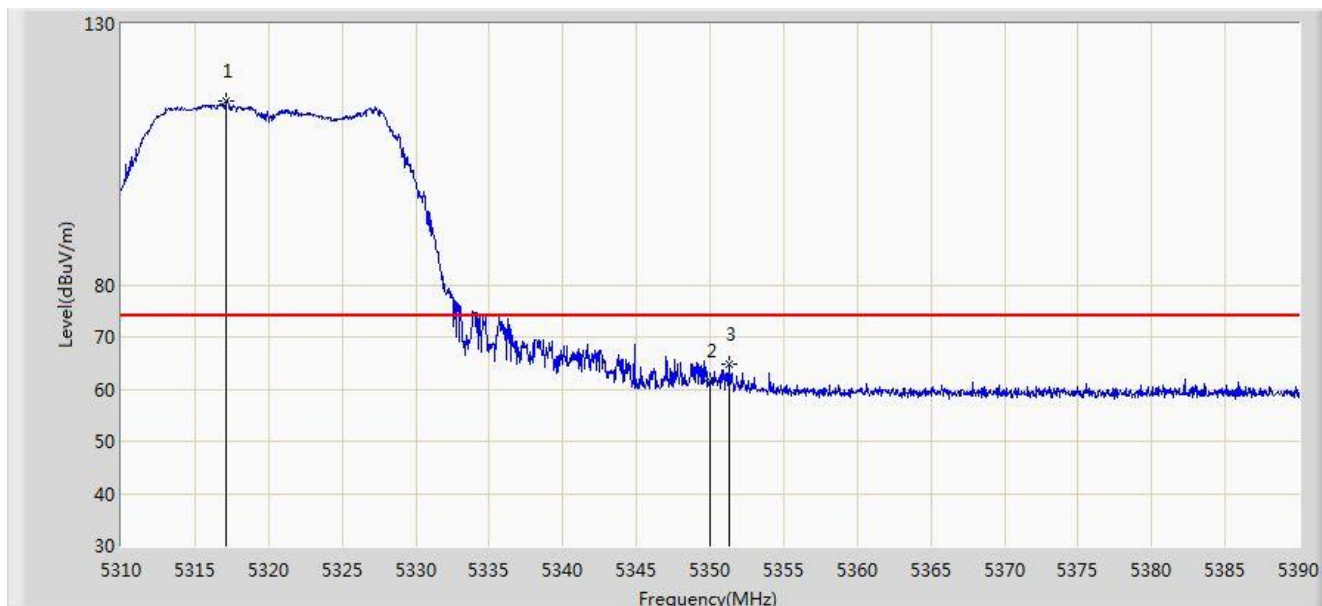


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5317.160	115.255	111.412	N/A	N/A	3.843	PK
2			5350.000	61.666	57.761	-12.334	74.000	3.904	PK
3			5351.280	64.925	61.018	-9.075	74.000	3.907	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/26 - 23:10
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11a at Channel 5320MHz	

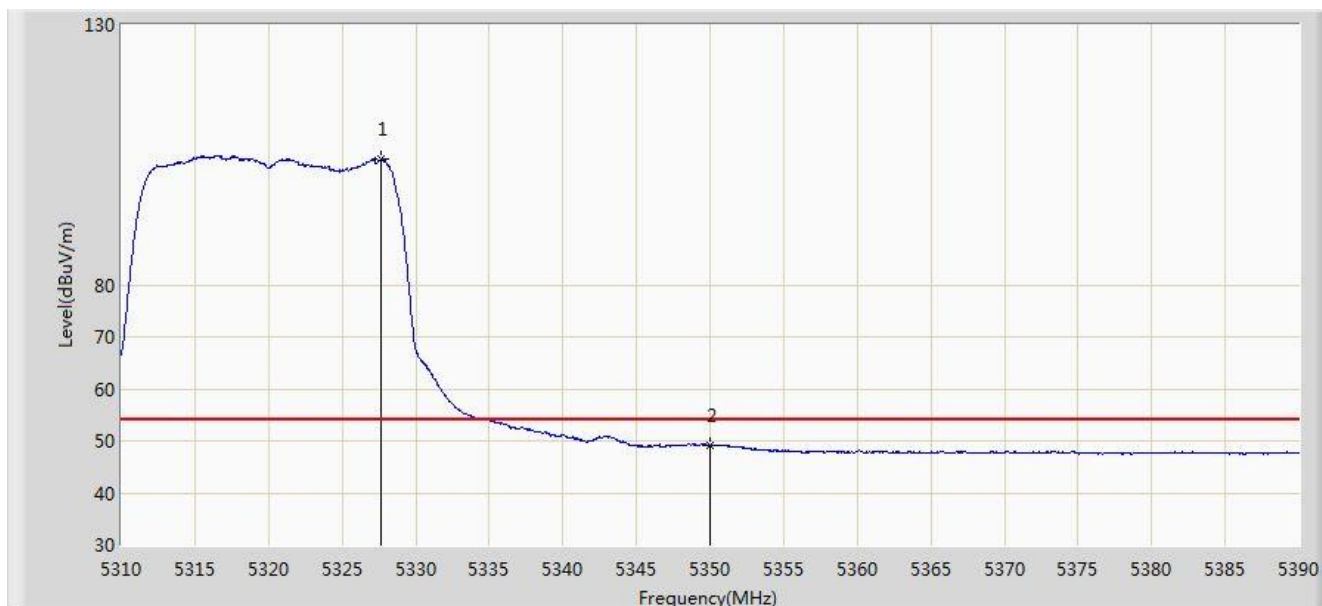


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5327.600	104.105	100.242	N/A	N/A	3.864	AV
2			5350.000	49.204	45.299	-4.796	54.000	3.904	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/26 - 23:17
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11a at Channel 5500MHz	

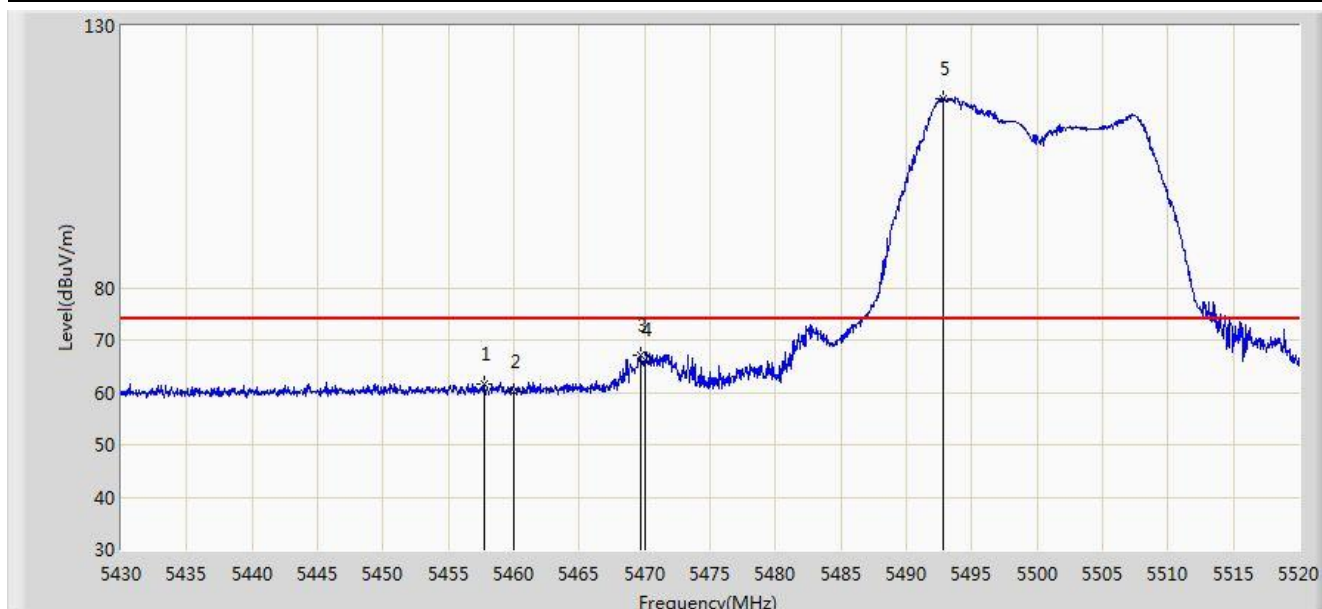


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5457.720	61.475	57.300	-12.525	74.000	4.176	PK
2			5460.000	60.166	55.986	-13.834	74.000	4.180	PK
3			5469.690	67.105	62.903	-1.095	68.200	4.202	PK
4			5470.000	66.199	61.997	-2.001	68.200	4.202	PK
5		*	5492.775	116.213	111.959	N/A	N/A	4.254	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/26 - 23:18
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11a at Channel 5500MHz	

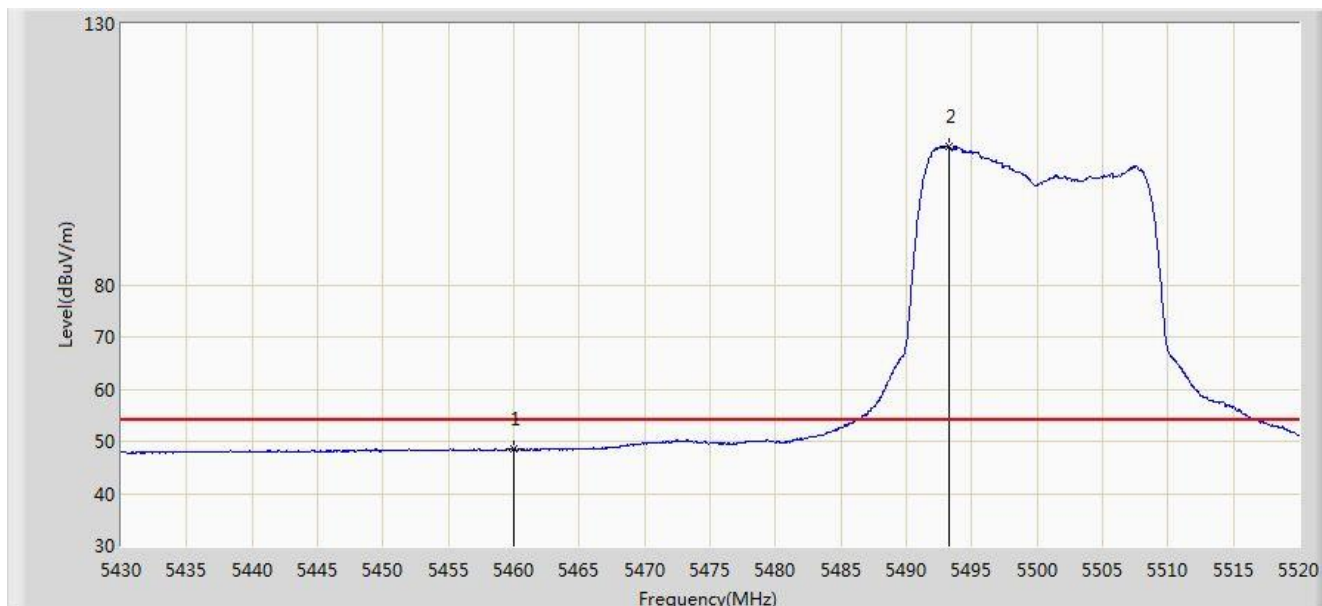


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	48.415	44.235	-5.585	54.000	4.180	AV
2		*	5493.225	106.650	102.395	N/A	N/A	4.255	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/26 - 23:13
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11a at Channel 5500MHz	

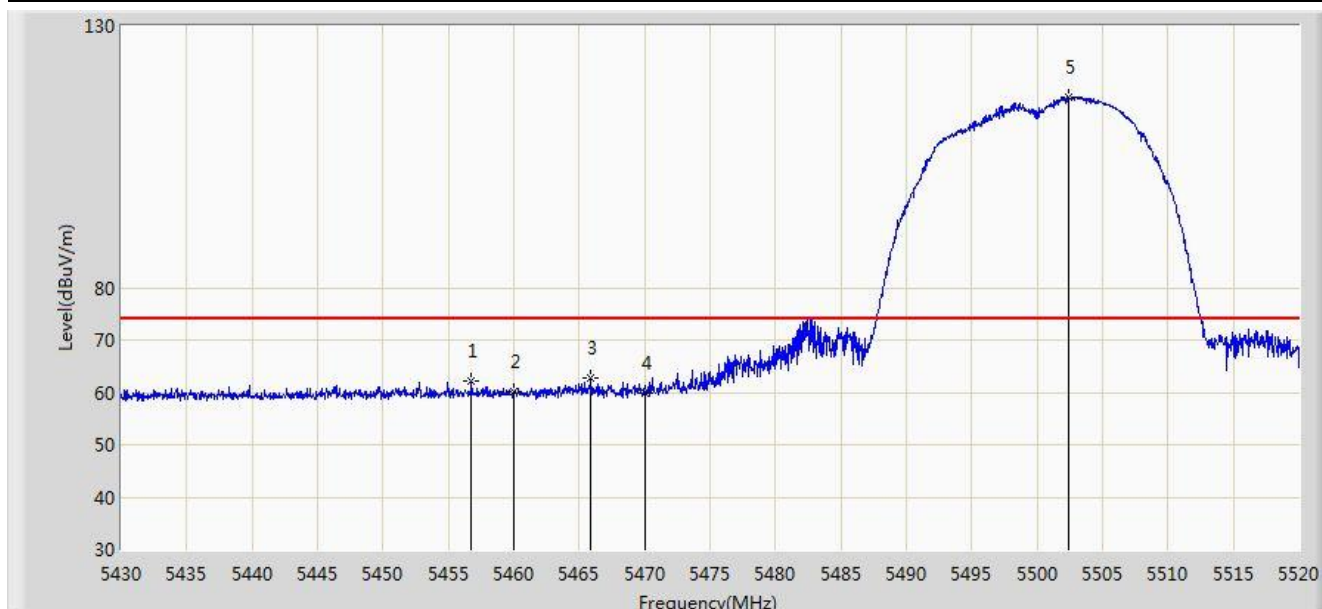


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5456.775	62.256	58.083	-11.744	74.000	4.173	PK
2			5460.000	60.132	55.952	-13.868	74.000	4.180	PK
3			5465.865	62.649	58.456	-5.551	68.200	4.193	PK
4			5470.000	59.973	55.771	-8.227	68.200	4.202	PK
5		*	5502.360	116.374	112.095	N/A	N/A	4.278	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/26 - 23:15
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11a at Channel 5500MHz	

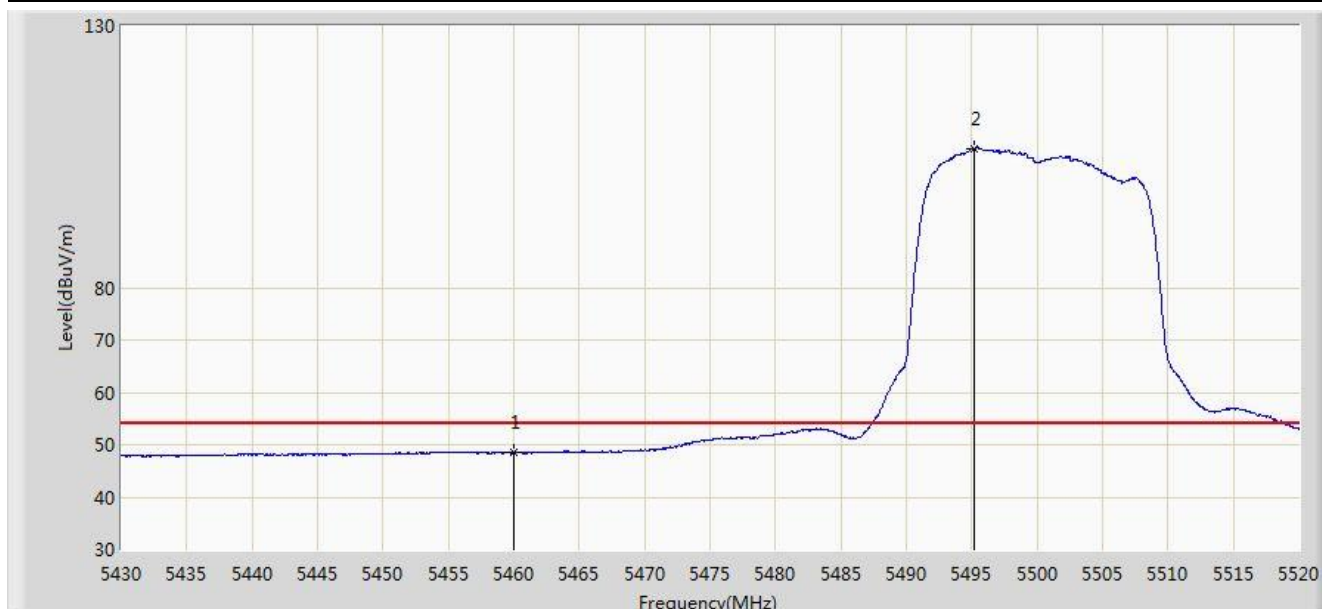


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	48.546	44.366	-5.454	54.000	4.180	AV
2		*	5495.205	106.568	102.308	N/A	N/A	4.259	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/26 - 23:24
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11a at Channel 5700MHz	

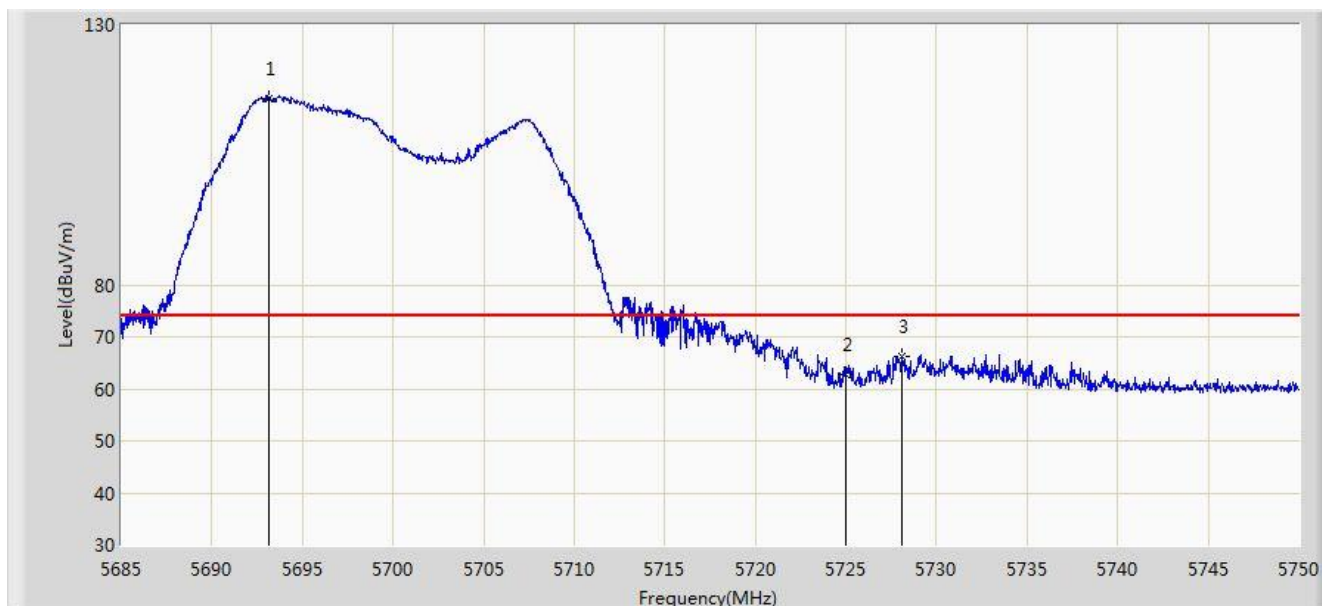


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5693.125	115.841	110.999	N/A	N/A	4.841	PK
2			5725.000	62.671	57.642	-11.329	74.000	5.029	PK
3			5728.127	66.318	61.269	-7.682	74.000	5.049	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/26 - 23:26
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11a at Channel 5700MHz	

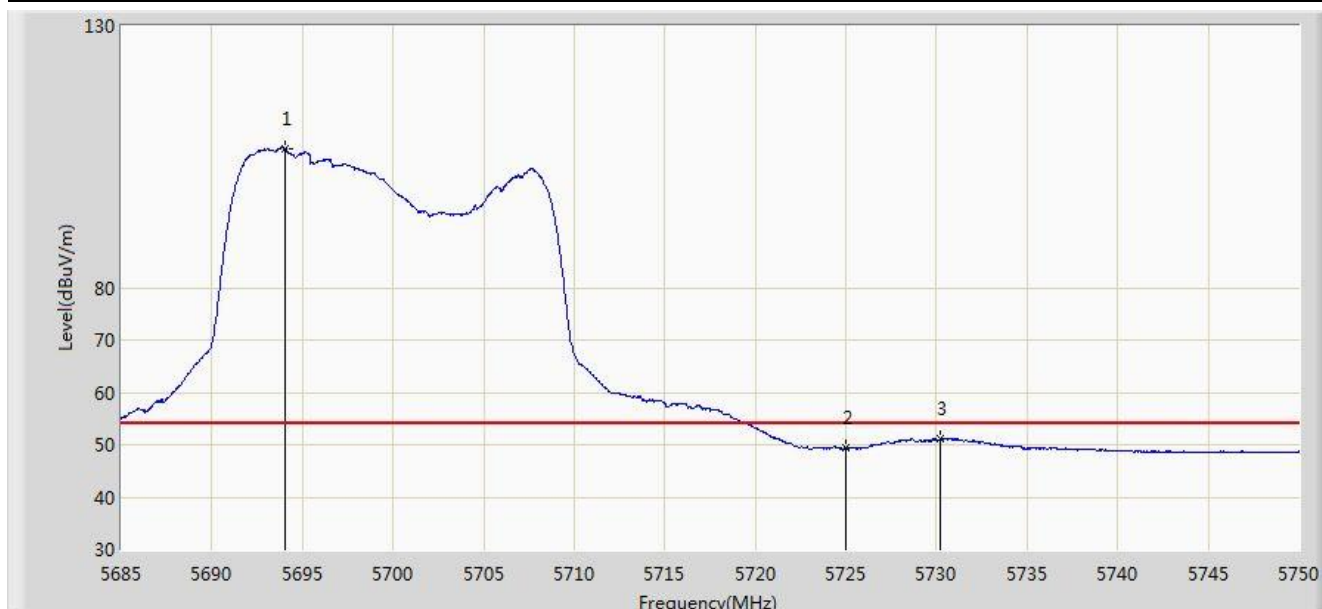


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5694.067	106.619	101.772	N/A	N/A	4.847	AV
2			5725.000	49.357	44.328	-4.643	54.000	5.029	AV
3			5730.240	51.206	46.144	-2.794	54.000	5.062	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/26 - 23:20
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11a at Channel 5700MHz	

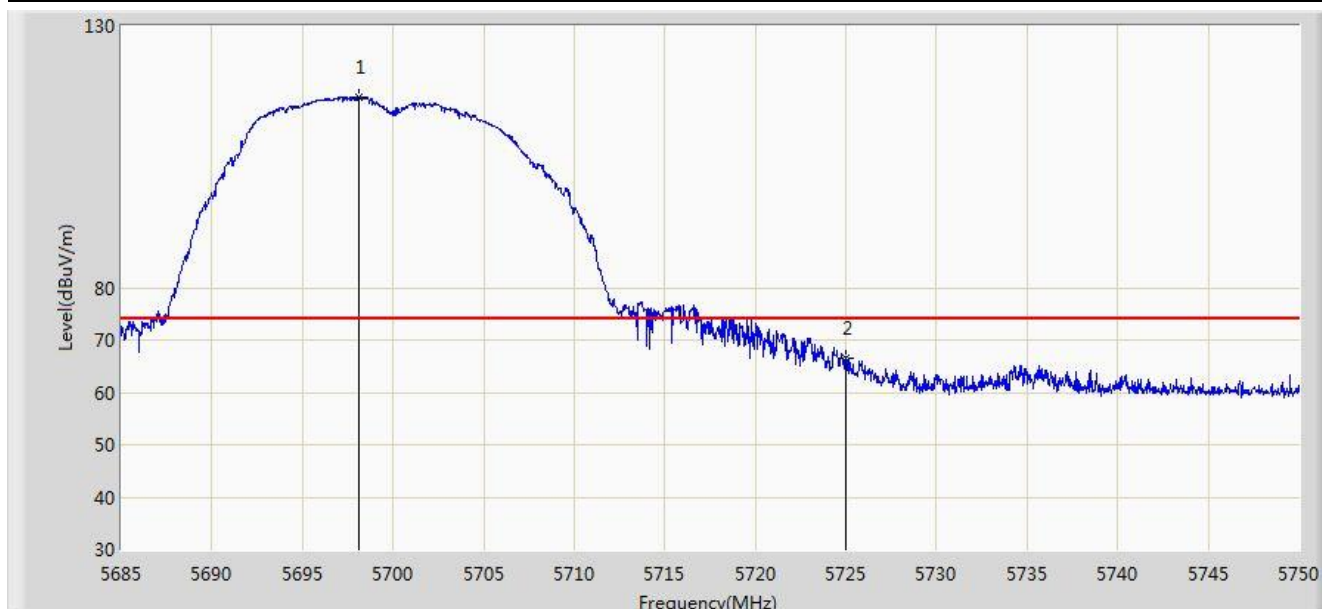


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5698.098	116.513	111.645	N/A	N/A	4.868	PK
2			5725.000	66.654	61.625	-7.346	74.000	5.029	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/26 - 23:23
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11a at Channel 5700MHz	

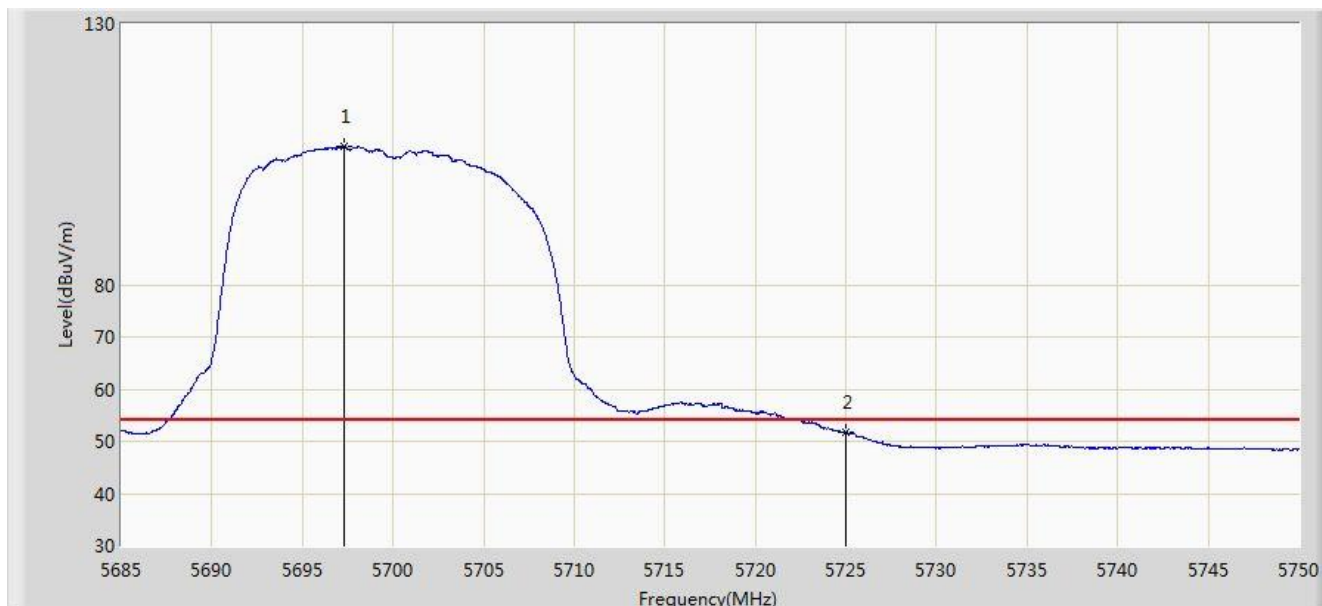


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5697.317	106.633	101.769	N/A	N/A	4.865	AV
2			5725.000	51.629	46.600	-2.371	54.000	5.029	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/26 - 23:31
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11a at Channel 5745MHz	

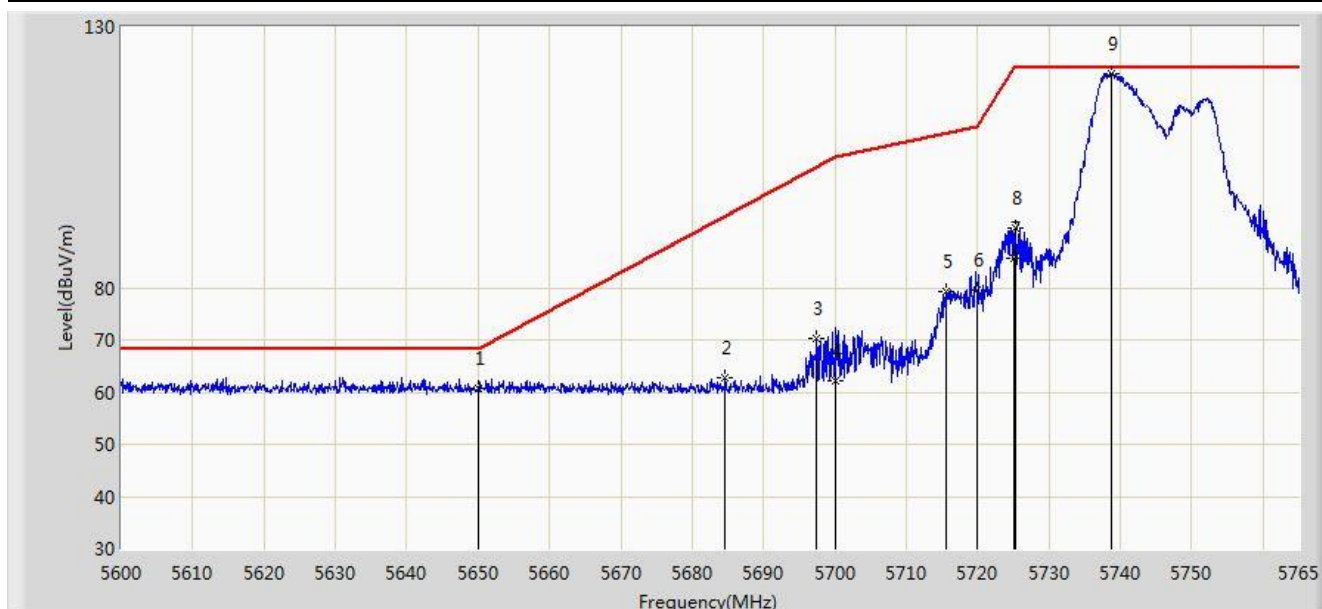


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5650.000	60.795	56.124	-7.405	68.200	4.671	PK
2			5684.645	62.641	57.835	-31.231	93.872	4.805	PK
3			5697.433	70.415	65.550	-32.894	103.308	4.865	PK
4			5700.000	62.218	57.340	-42.982	105.200	4.878	PK
5			5715.583	79.319	74.351	-30.245	109.565	4.968	PK
6			5720.000	79.421	74.424	-31.379	110.800	4.997	PK
7			5725.000	85.660	80.631	-36.540	122.200	5.029	PK
8			5725.400	91.416	86.384	-30.784	122.200	5.032	PK
9		*	5738.765	121.042	115.925	N/A	N/A	5.116	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/26 - 23:28
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11a at Channel 5745MHz	

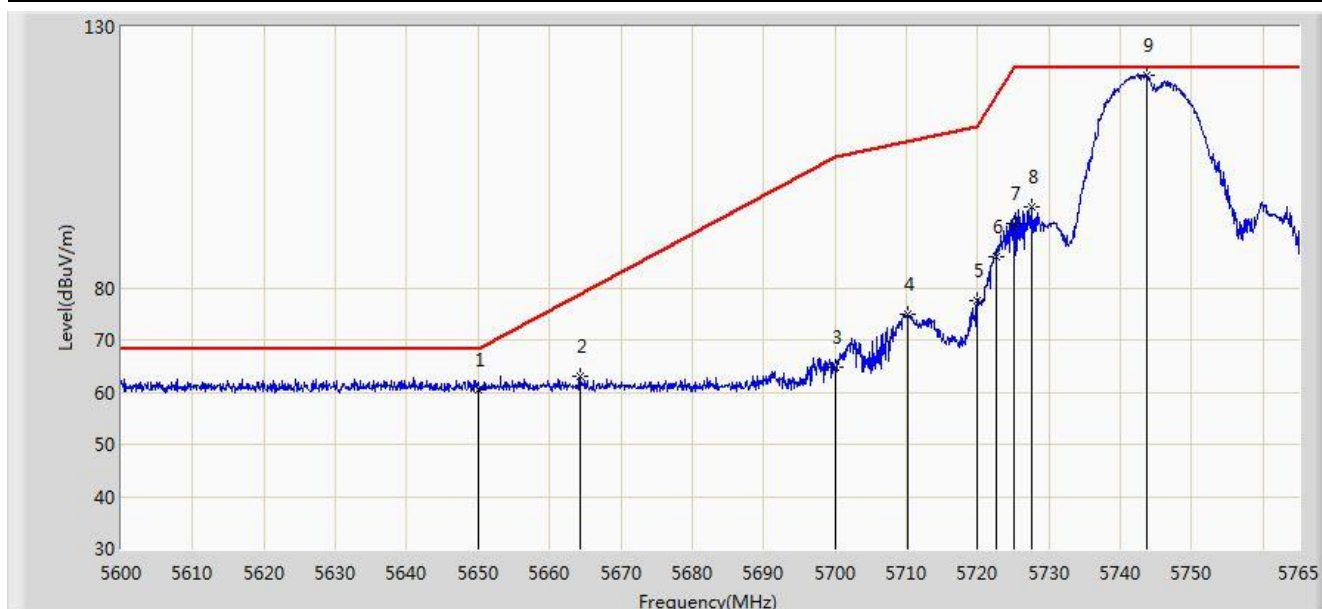


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5650.000	60.478	55.807	-7.722	68.200	4.671	PK
2			5664.268	63.132	58.408	-15.660	78.792	4.724	PK
3			5700.000	64.881	60.003	-40.319	105.200	4.878	PK
4			5710.220	75.071	70.137	-32.993	108.064	4.935	PK
5			5720.000	77.652	72.655	-33.148	110.800	4.997	PK
6			5722.595	86.035	81.021	-30.683	116.718	5.014	PK
7			5725.000	92.407	87.378	-29.793	122.200	5.029	PK
8			5727.627	95.549	90.503	-26.651	122.200	5.046	PK
9		*	5743.632	120.670	115.523	N/A	N/A	5.147	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/26 - 23:35
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11a at Channel 5825MHz	

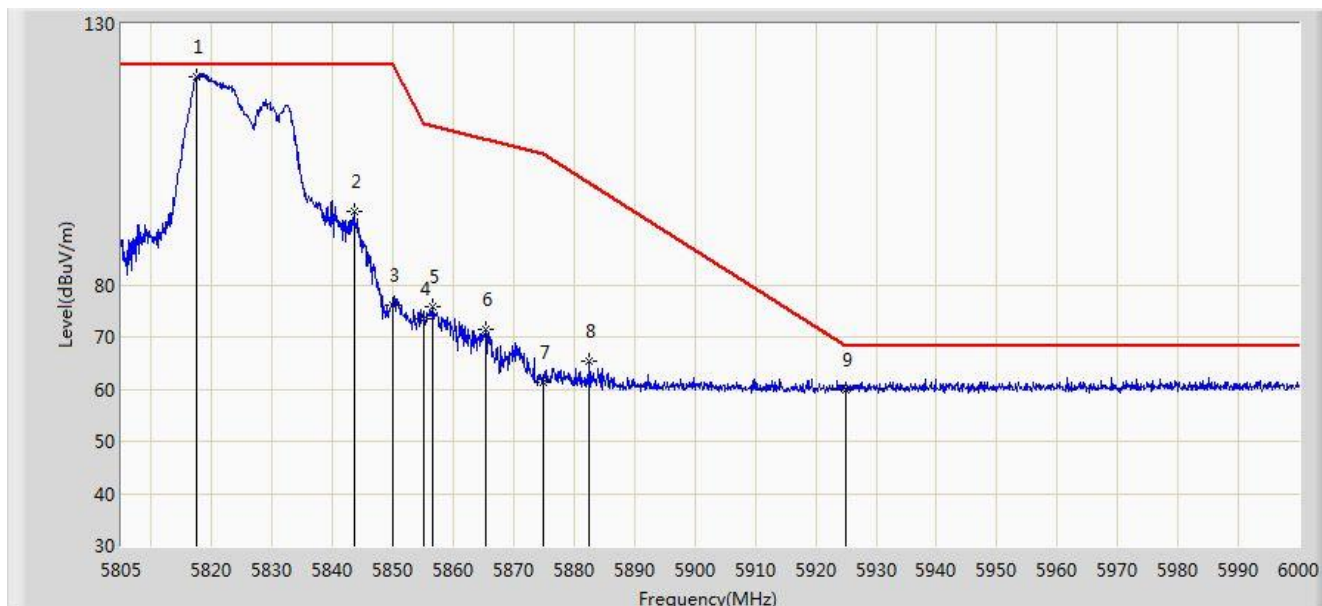


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5817.480	119.908	114.364	N/A	N/A	5.544	PK
2			5843.513	93.918	88.222	-28.282	122.200	5.697	PK
3			5850.000	75.985	70.259	-46.215	122.200	5.726	PK
4			5855.000	73.619	67.873	-37.181	110.800	5.746	PK
5			5856.675	75.661	69.908	-34.669	110.330	5.754	PK
6			5865.353	71.458	65.671	-36.441	107.899	5.787	PK
7			5875.000	61.238	55.418	-43.962	105.200	5.820	PK
8			5882.513	65.364	59.518	-34.257	99.620	5.846	PK
9			5925.000	59.830	53.864	-8.370	68.200	5.967	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/26 - 23:32
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11a at Channel 5825MHz	

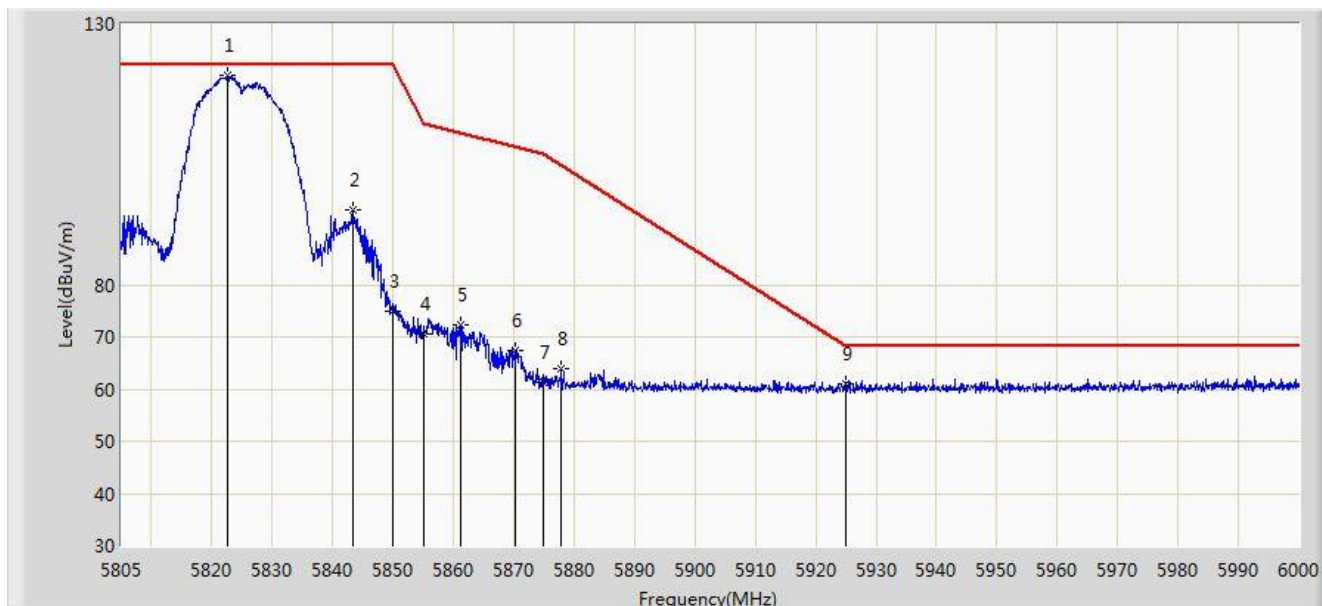


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5822.550	120.116	114.542	N/A	N/A	5.573	PK
2			5843.317	94.381	88.686	-27.819	122.200	5.694	PK
3			5850.000	75.026	69.300	-47.174	122.200	5.726	PK
4			5855.000	70.624	64.878	-40.176	110.800	5.746	PK
5			5861.257	72.303	66.531	-36.743	109.046	5.772	PK
6			5870.228	67.430	61.627	-39.104	106.534	5.803	PK
7			5875.000	61.195	55.375	-44.005	105.200	5.820	PK
8			5877.833	64.015	58.185	-39.081	103.095	5.830	PK
9			5925.000	61.058	55.092	-7.142	68.200	5.967	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/26 - 23:58
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11ac-VHT20 at Channel 5180MHz	

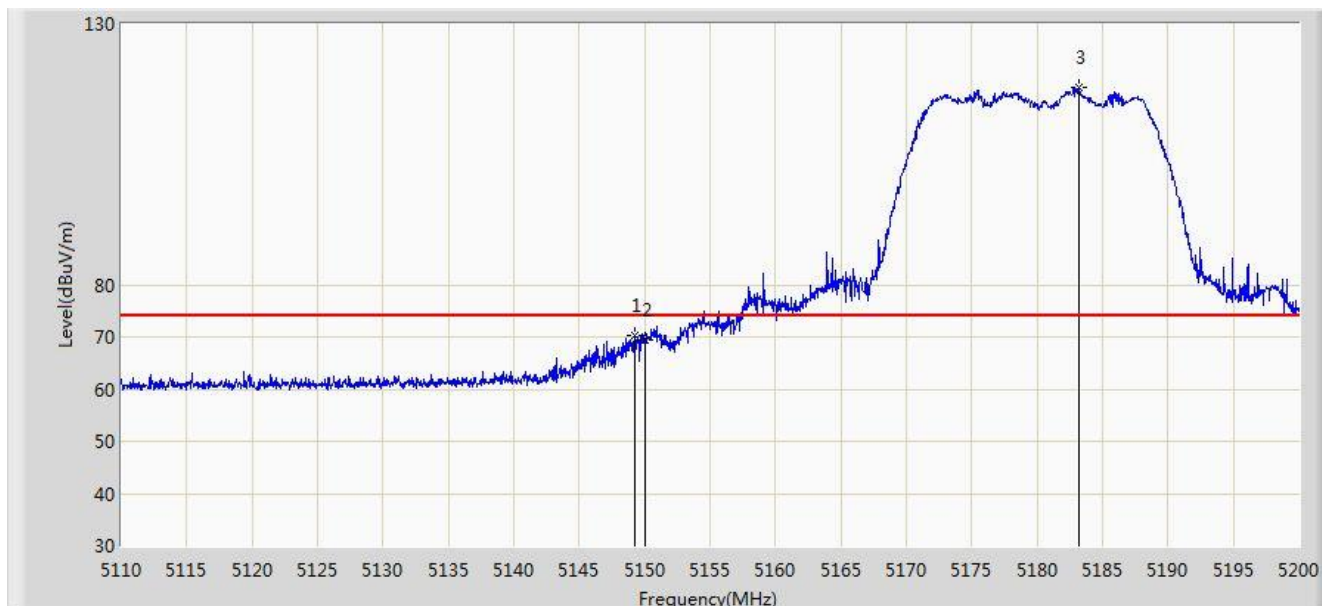


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5149.285	70.292	66.120	-3.708	74.000	4.171	PK
2			5150.000	69.448	65.279	-4.552	74.000	4.170	PK
3		*	5183.170	117.814	113.756	N/A	N/A	4.057	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/26 - 23:59
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11ac-VHT20 at Channel 5180MHz	

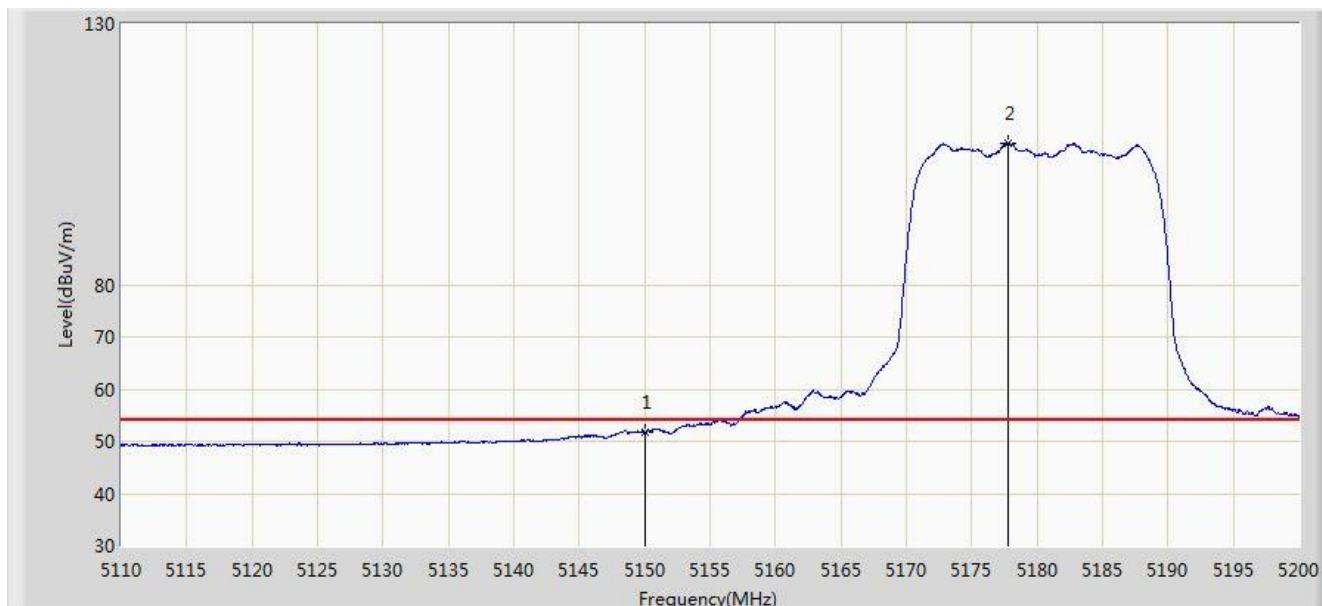


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	51.773	47.604	-2.227	54.000	4.170	AV
2		*	5177.770	107.204	103.127	N/A	N/A	4.076	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/26 - 23:55
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11ac-VHT20 at Channel 5180MHz	

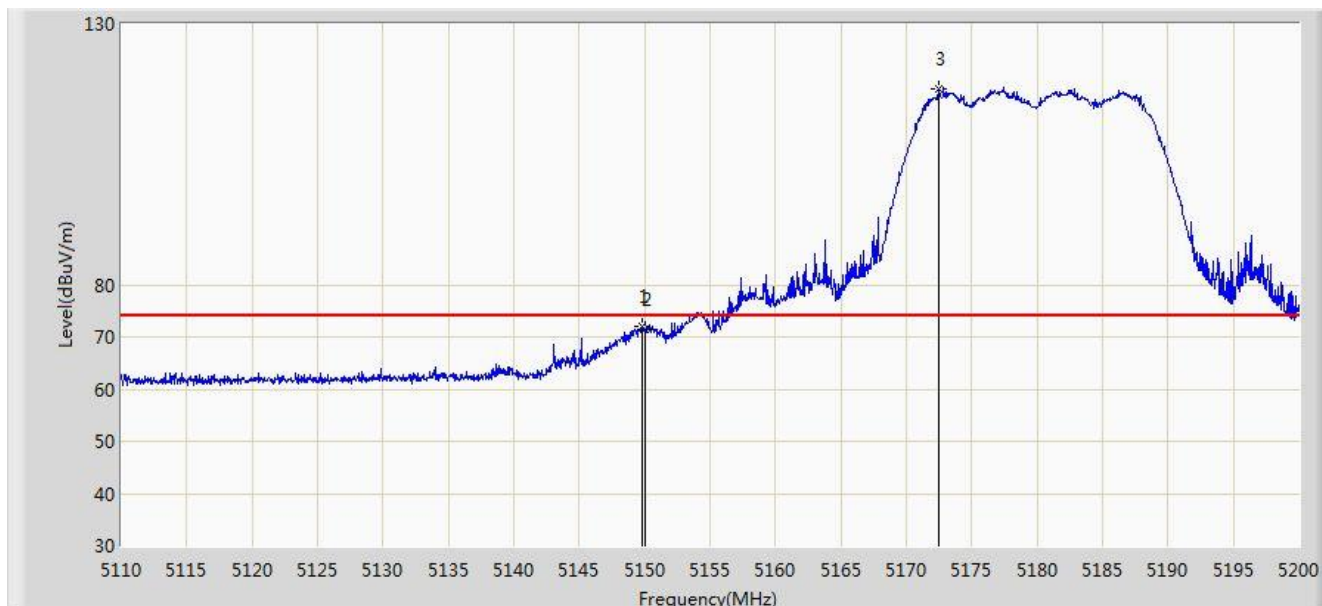


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5149.780	71.933	67.763	-2.067	74.000	4.169	PK
2			5150.000	71.499	67.330	-2.501	74.000	4.170	PK
3		*	5172.460	117.539	113.443	N/A	N/A	4.096	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/26 - 23:57
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11ac-VHT20 at Channel 5180MHz	

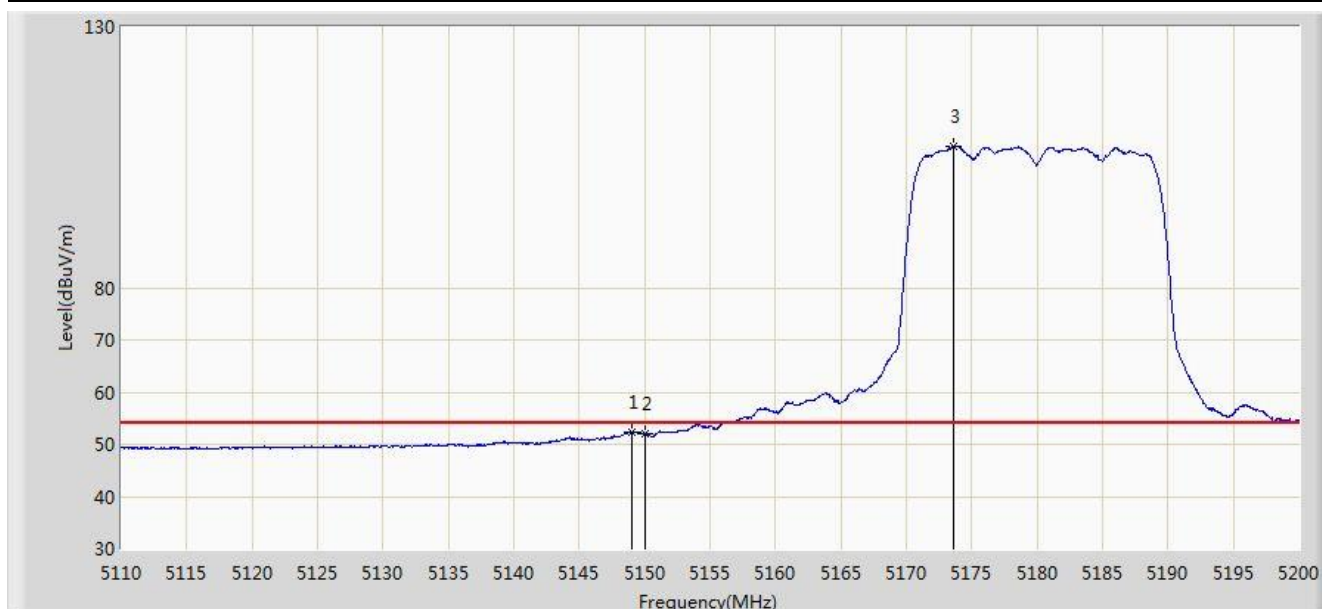


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5149.015	52.295	48.123	-1.705	54.000	4.173	AV
2			5150.000	52.065	47.896	-1.935	54.000	4.170	AV
3		*	5173.585	107.194	103.102	N/A	N/A	4.092	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/27 - 00:04
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11ac-VHT20 at Channel 5320MHz	

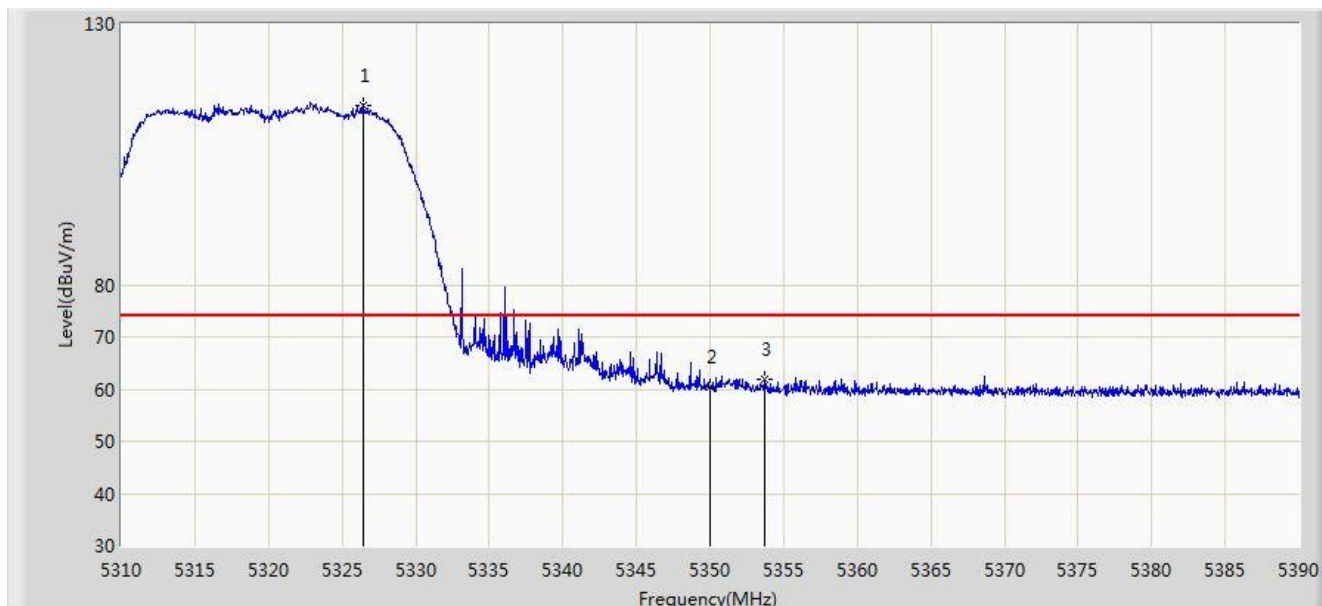


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5326.400	114.396	110.535	N/A	N/A	3.861	PK
2			5350.000	60.441	56.536	-13.559	74.000	3.904	PK
3			5353.680	61.887	57.976	-12.113	74.000	3.911	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/27 - 00:05
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11ac-VHT20 at Channel 5320MHz	

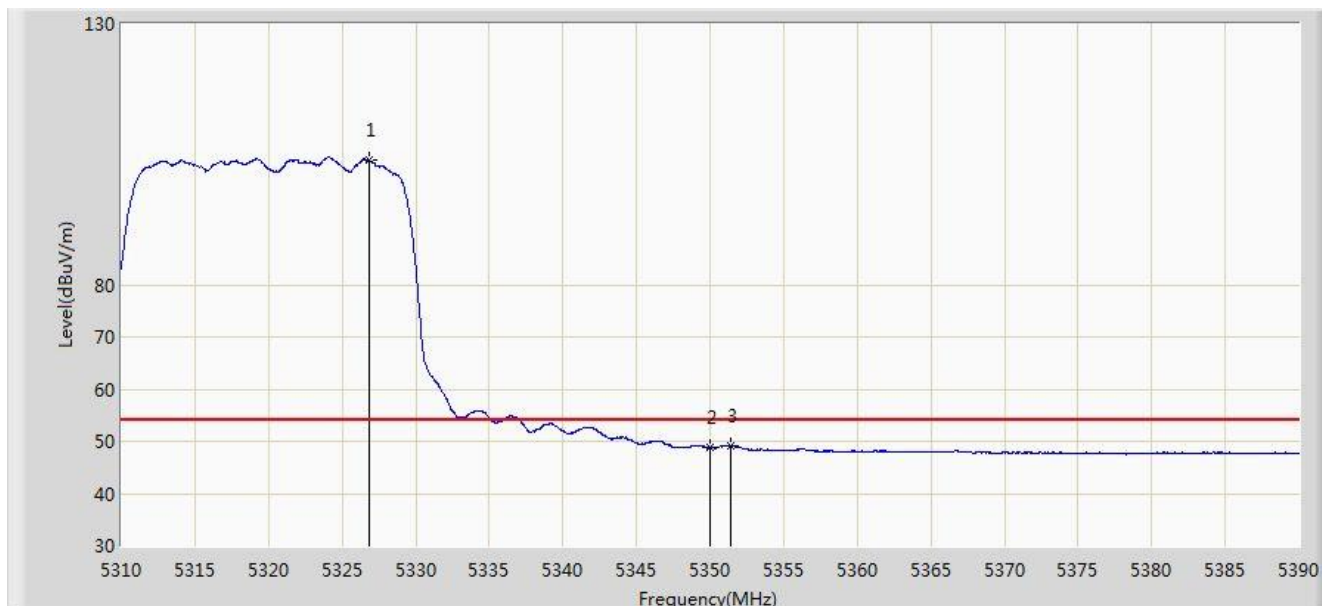


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5326.880	103.792	99.930	N/A	N/A	3.861	AV
2			5350.000	48.729	44.824	-5.271	54.000	3.904	AV
3			5351.400	49.166	45.259	-4.834	54.000	3.907	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/27 - 00:01
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11ac-VHT20 at Channel 5320MHz	

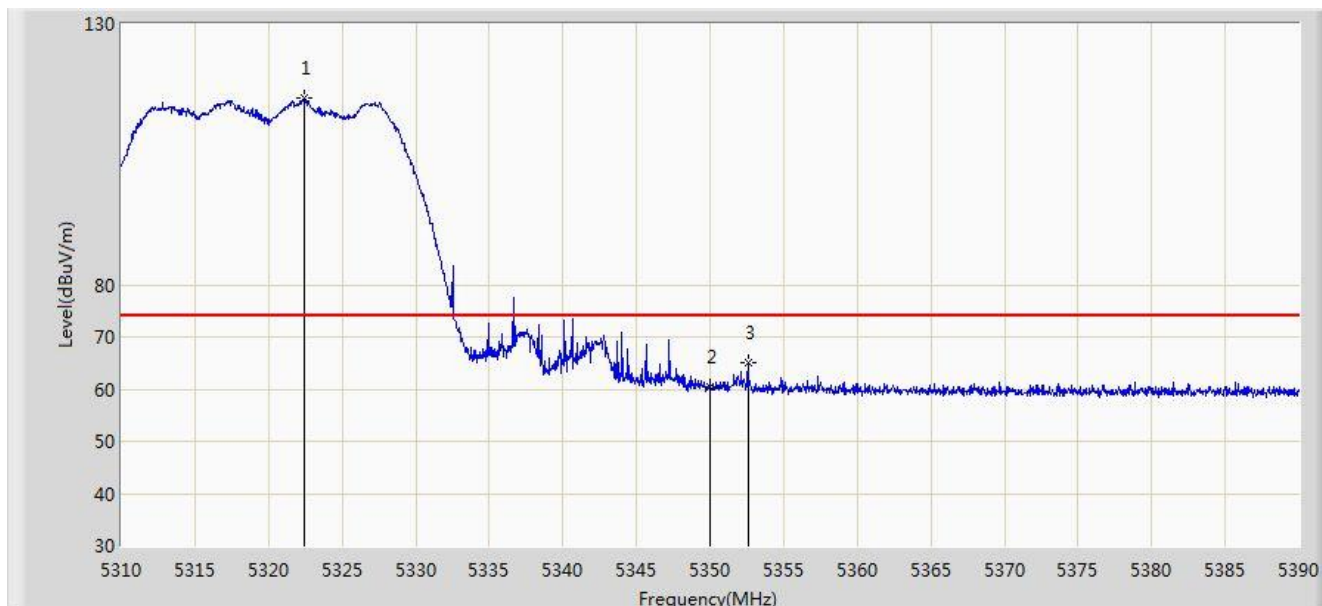


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5322.400	115.669	111.816	N/A	N/A	3.853	PK
2			5350.000	60.346	56.441	-13.654	74.000	3.904	PK
3			5352.560	65.146	61.237	-8.854	74.000	3.909	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/27 - 00:02
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11ac-VHT20 at Channel 5320MHz	

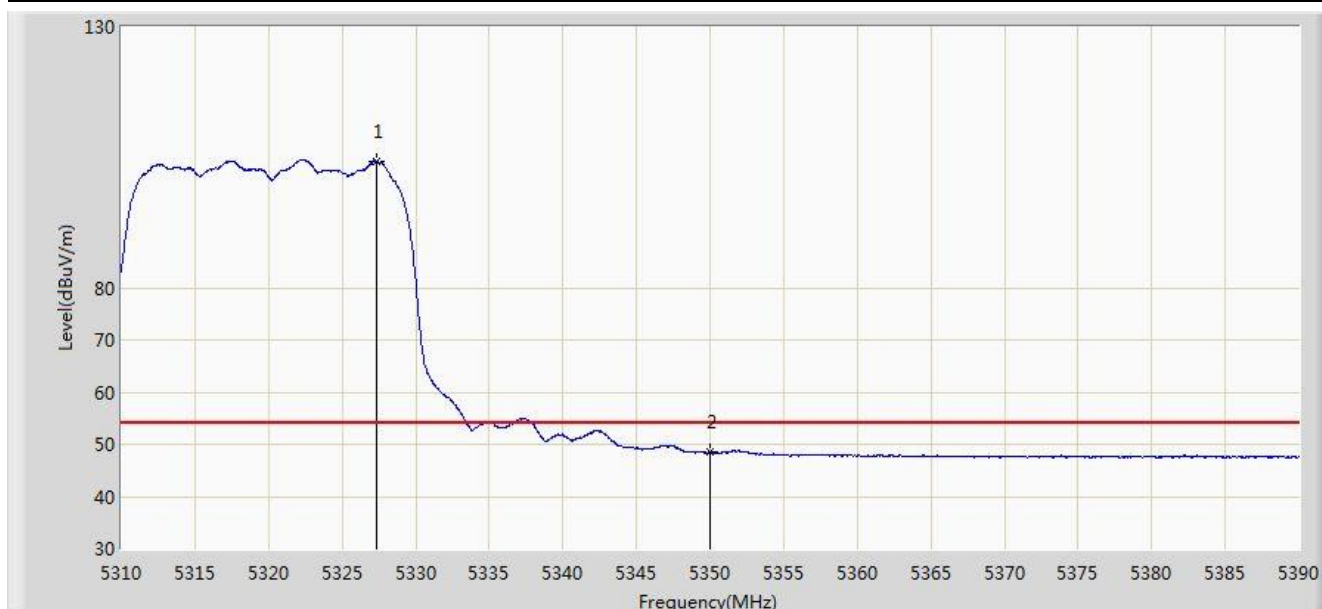


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5327.360	104.318	100.455	N/A	N/A	3.862	AV
2			5350.000	48.456	44.551	-5.544	54.000	3.904	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/27 - 00:07
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11ac-VHT20 at Channel 5500MHz	

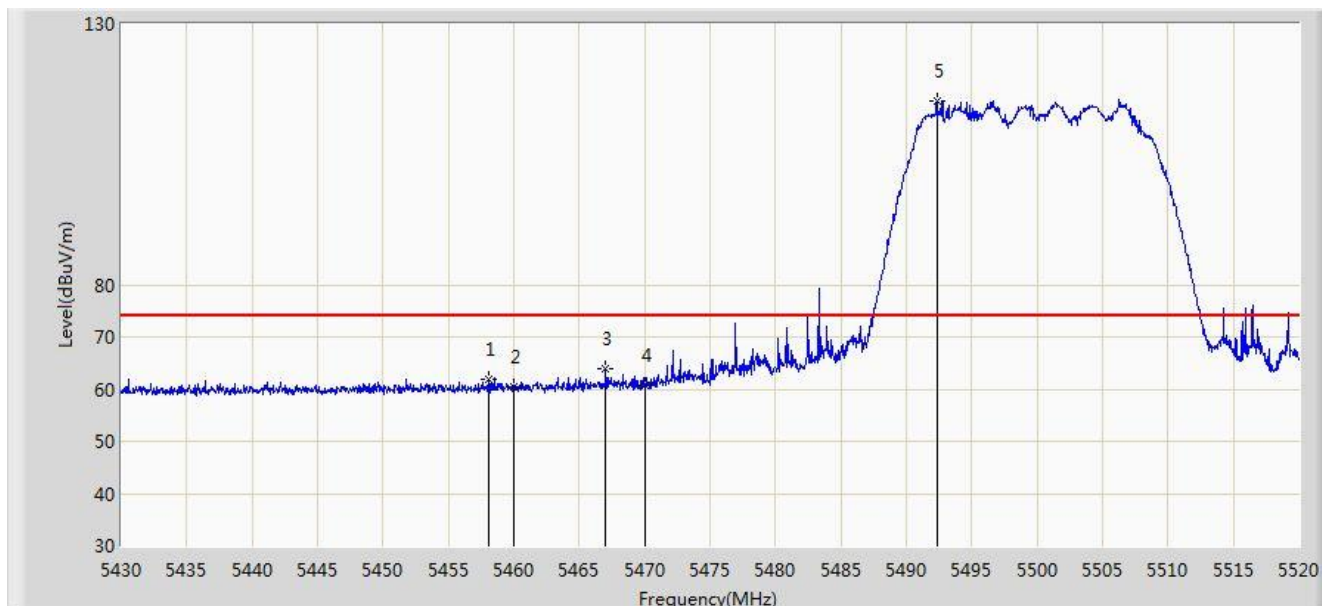


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5458.080	61.827	57.651	-12.173	74.000	4.176	PK
2			5460.000	60.418	56.238	-13.582	74.000	4.180	PK
3			5467.035	63.824	59.628	-4.376	68.200	4.196	PK
4			5470.000	60.699	56.497	-7.501	68.200	4.202	PK
5		*	5492.370	115.261	111.008	N/A	N/A	4.253	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/27 - 00:08
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11ac-VHT20 at Channel 5500MHz	

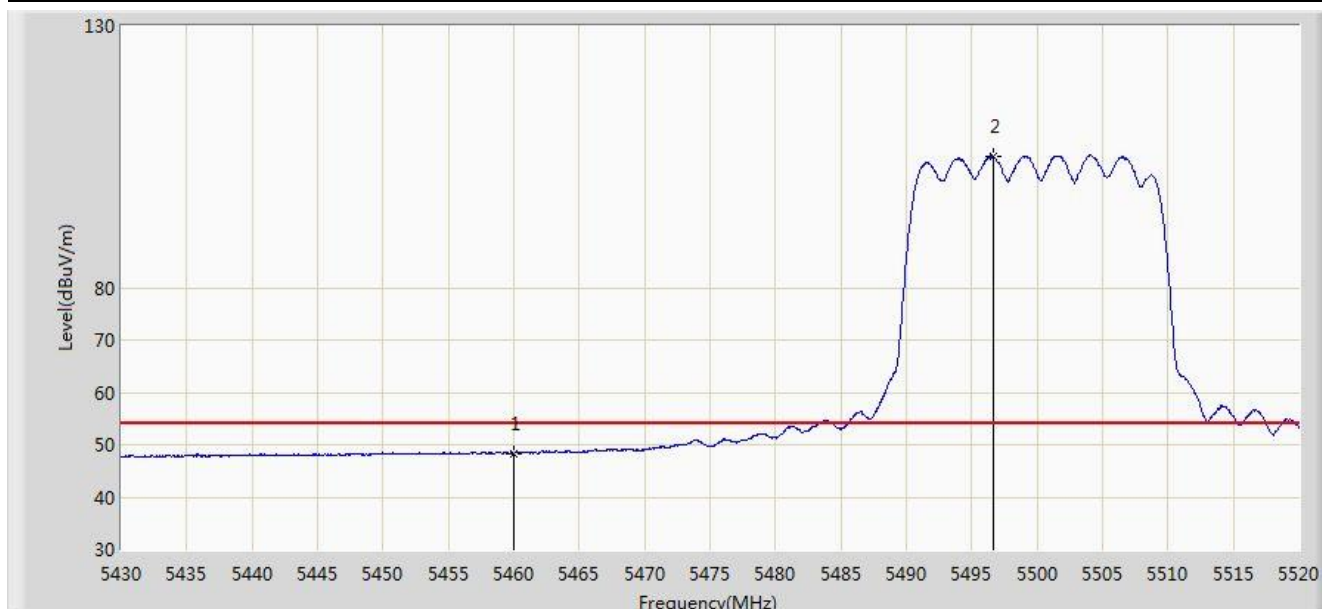


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	48.352	44.172	-5.648	54.000	4.180	AV
2		*	5496.600	105.006	N/A	N/A	54.000	4.263	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/27 - 00:09
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11ac-VHT20 at Channel 5500MHz	

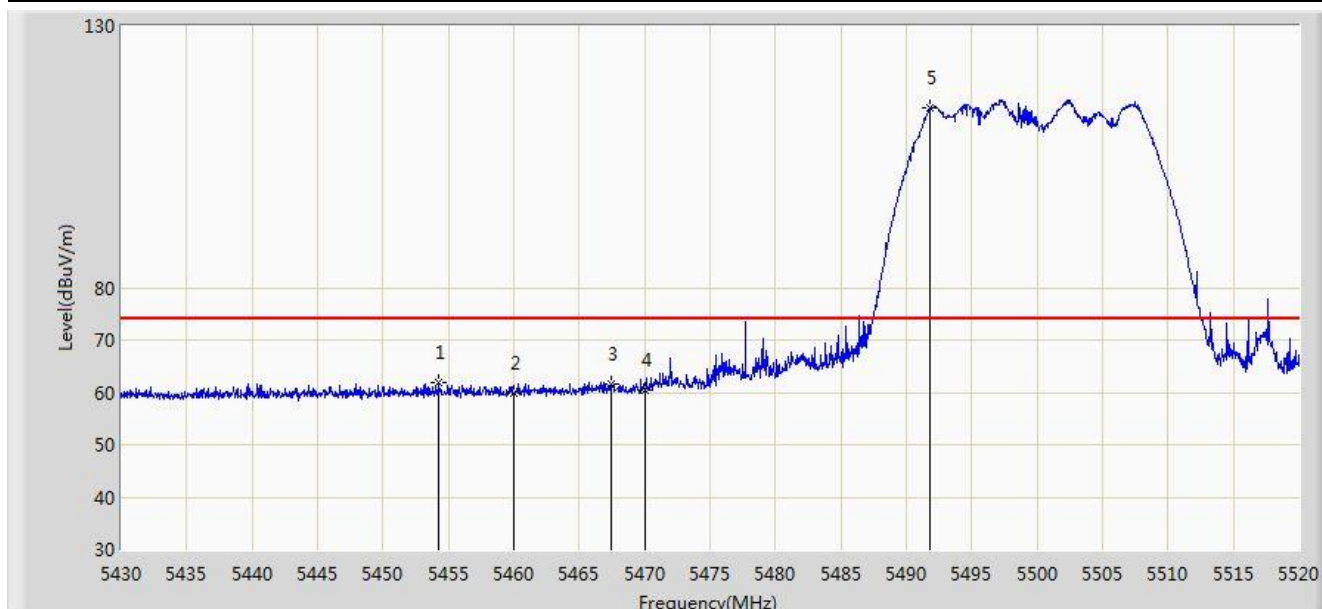


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5454.255	61.950	57.782	-12.050	74.000	4.168	PK
2			5460.000	59.819	55.639	-14.181	74.000	4.180	PK
3			5467.440	61.648	57.451	-6.552	68.200	4.196	PK
4			5470.000	60.471	56.269	-7.729	68.200	4.202	PK
5		*	5491.830	114.230	109.978	N/A	N/A	4.253	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/27 - 00:11
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11ac-VHT20 at Channel 5500MHz	

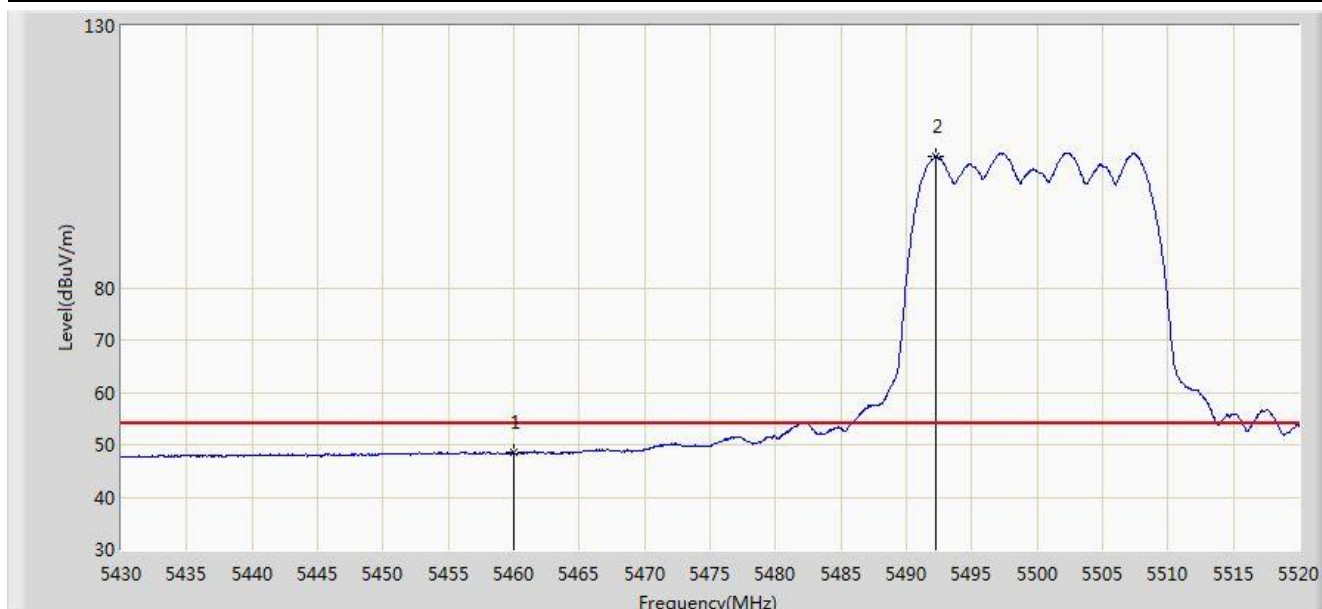


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	48.482	44.302	-5.518	54.000	4.180	AV
2		*	5492.235	105.064	100.811	N/A	N/A	4.253	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/27 - 00:16
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11ac-VHT20 at Channel 5700MHz	

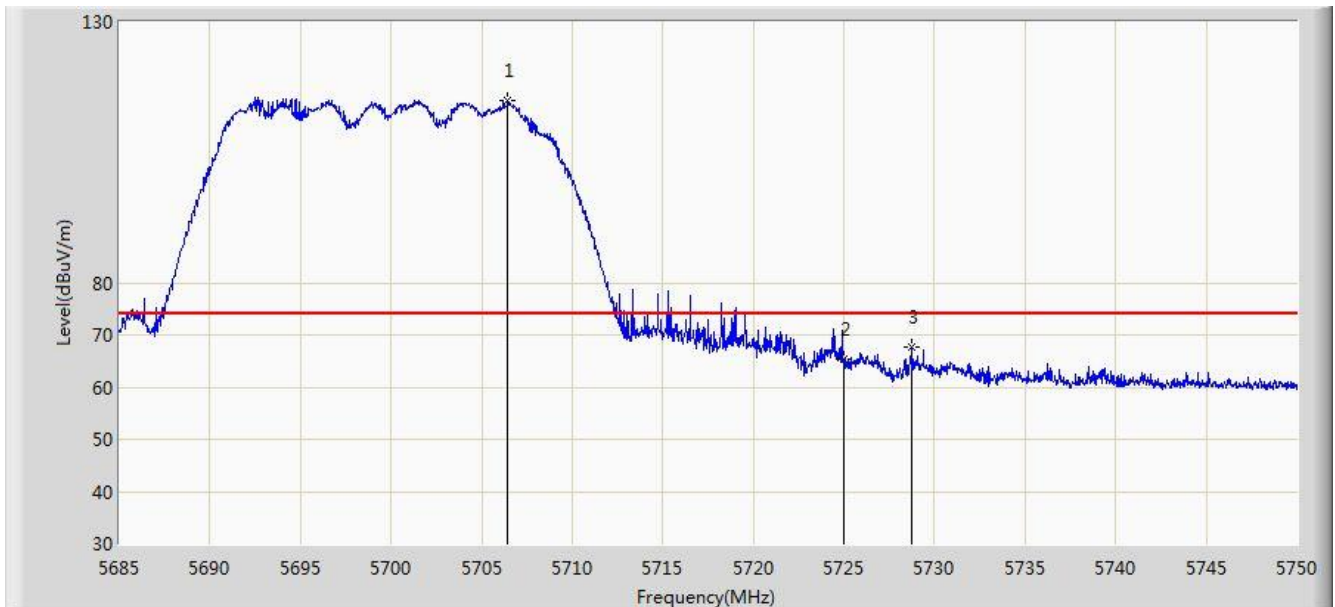


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5706.450	114.918	110.005	N/A	N/A	4.912	PK
2			5725.000	65.336	60.307	-8.664	74.000	5.029	PK
3			5728.777	67.780	62.727	-6.220	74.000	5.053	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/27 - 00:17
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11ac-VHT20 at Channel 5700MHz	

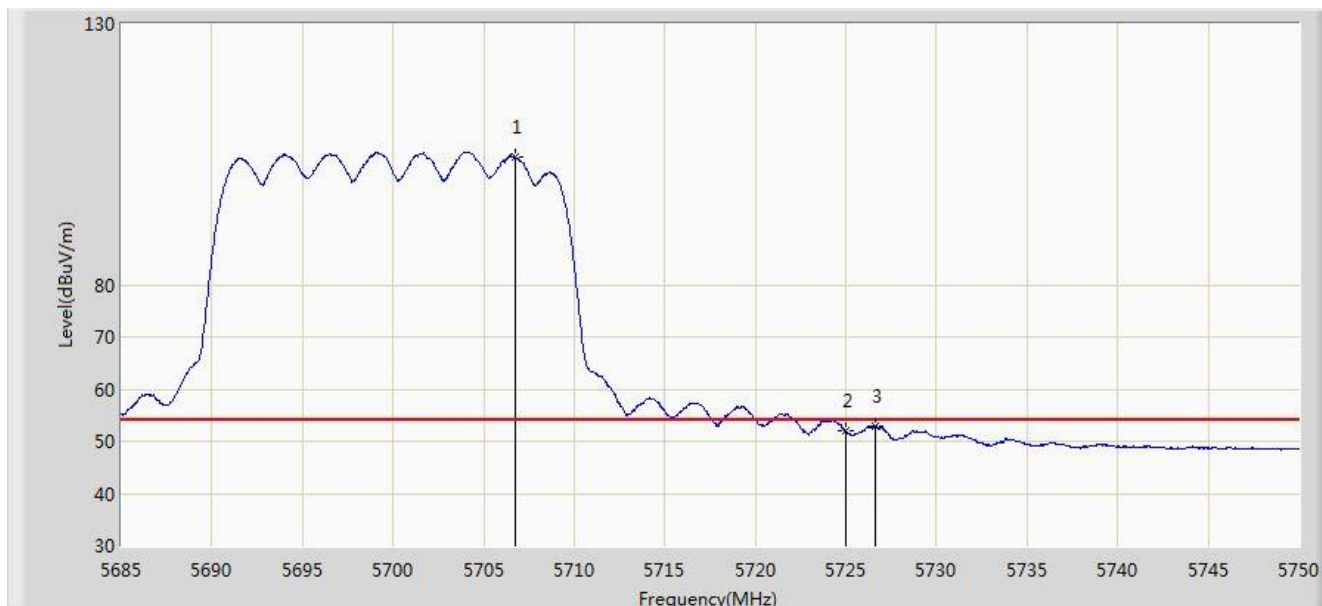


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5706.710	104.616	99.702	N/A	N/A	4.915	AV
2			5725.000	51.922	46.893	-2.078	54.000	5.029	AV
3			5726.600	52.904	47.865	-1.096	54.000	5.039	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/27 - 00:12
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11ac-VHT20 at Channel 5700MHz	

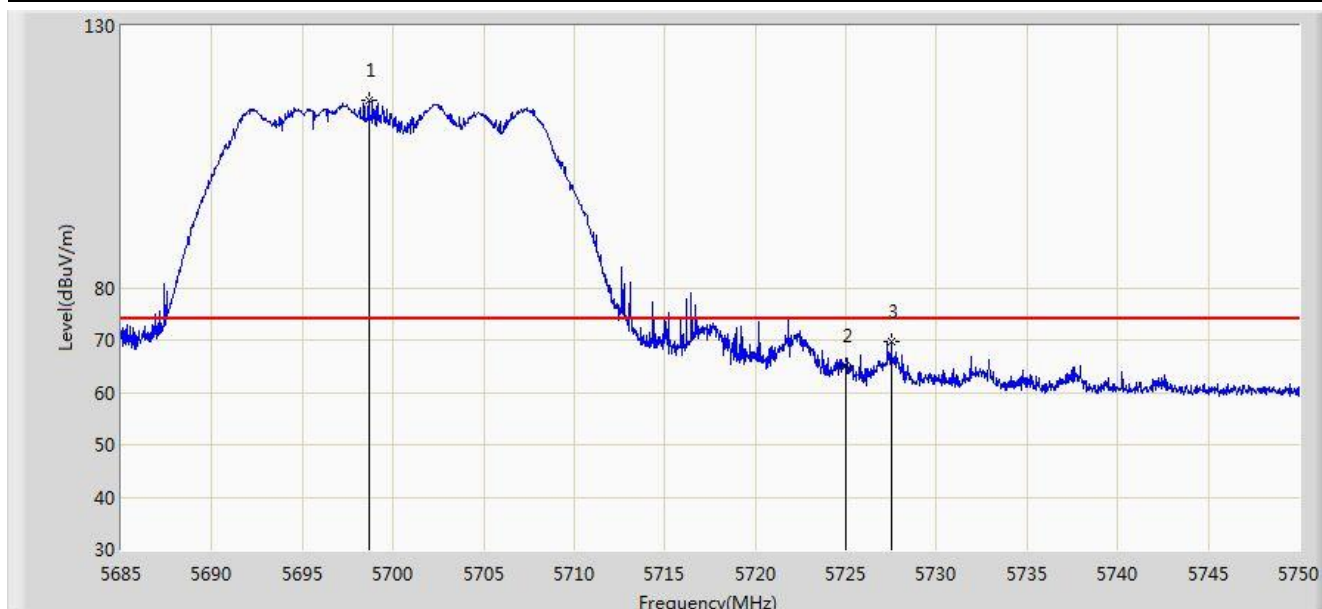


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5698.650	115.879	111.008	N/A	N/A	4.871	PK
2			5725.000	65.097	60.068	-8.903	74.000	5.029	PK
3			5727.510	69.638	64.593	-4.362	74.000	5.045	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/27 - 00:14
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11ac-VHT20 at Channel 5700MHz	

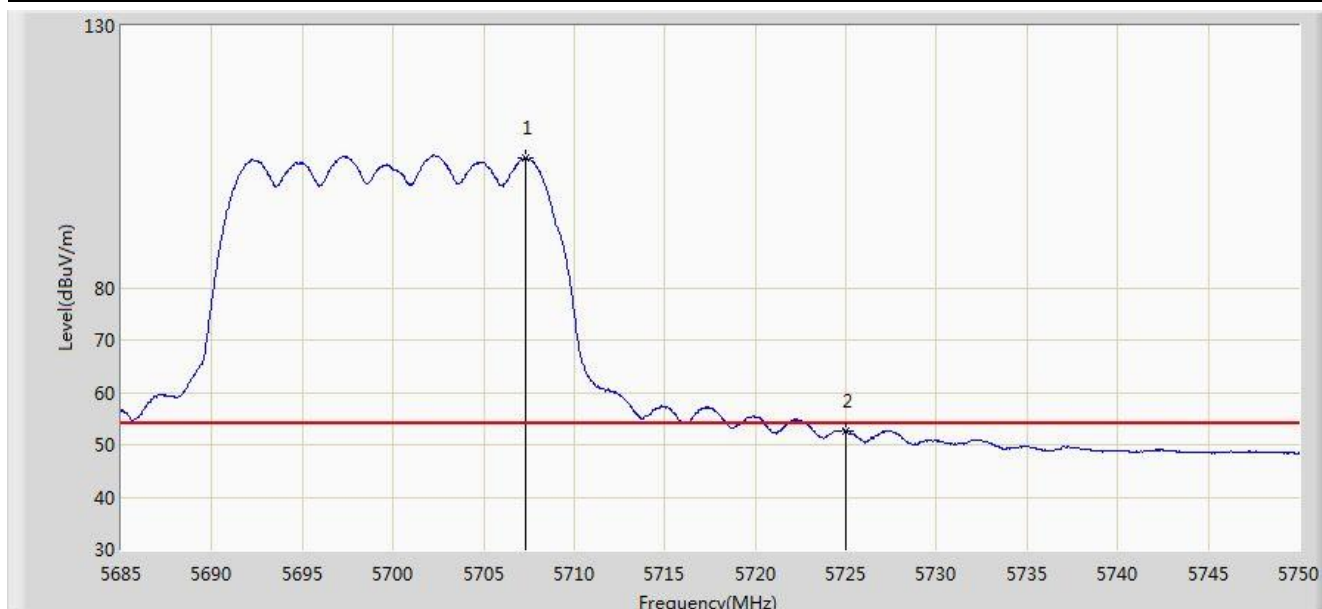


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5707.295	104.736	99.819	N/A	N/A	4.917	AV
2			5725.000	52.476	47.447	-1.524	54.000	5.029	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/27 - 00:19
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11ac-VHT20 at Channel 5745MHz	

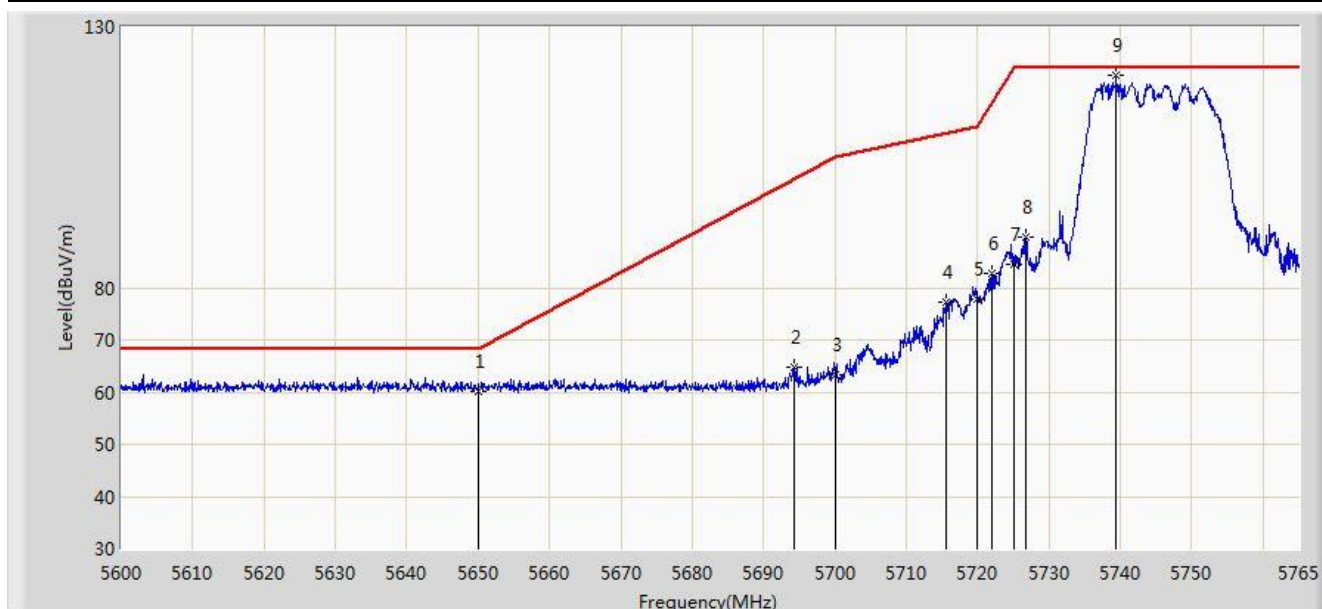


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5650.000	60.245	55.574	-7.955	68.200	4.671	PK
2			5694.380	64.671	59.823	-36.386	101.057	4.849	PK
3			5700.000	63.428	58.550	-41.772	105.200	4.878	PK
4			5715.500	77.239	72.271	-32.303	109.542	4.968	PK
5			5720.000	77.715	72.718	-33.085	110.800	4.997	PK
6			5722.018	82.722	77.712	-32.680	115.402	5.010	PK
7			5725.000	84.635	79.606	-37.565	122.200	5.029	PK
8			5726.720	89.850	84.810	-32.350	122.200	5.040	PK
9		*	5739.425	120.588	115.467	N/A	N/A	5.122	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/27 - 00:21
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11ac-VHT20 at Channel 5745MHz	

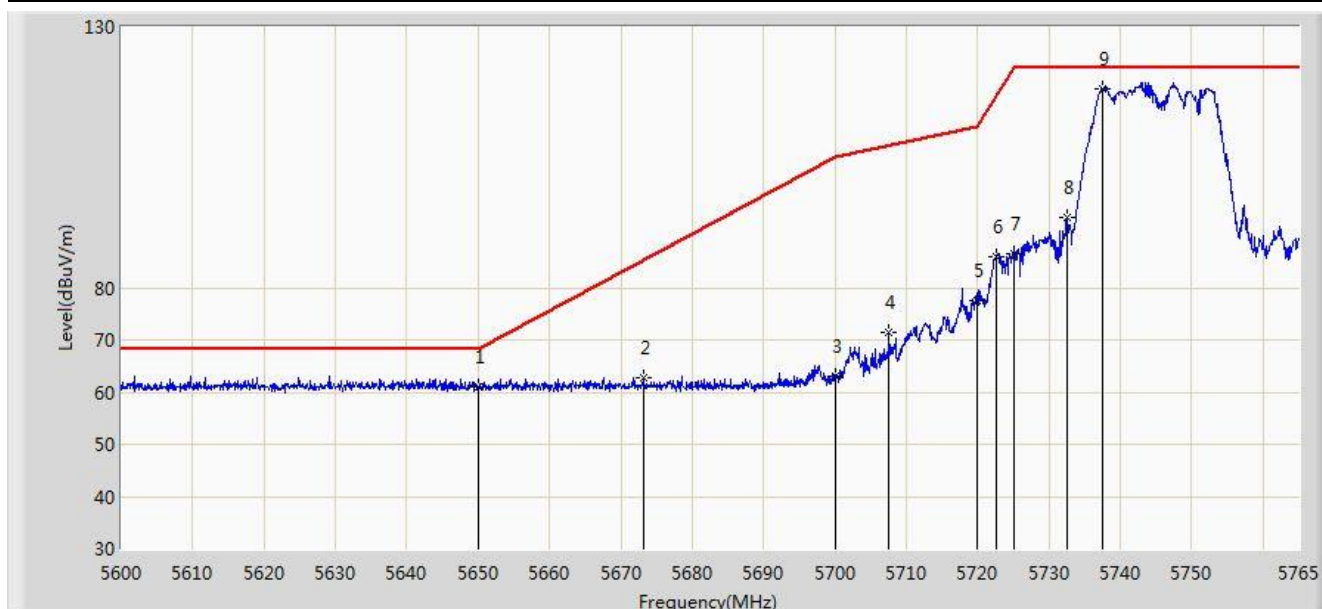


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5650.000	61.006	56.335	-7.194	68.200	4.671	PK
2			5673.095	62.663	57.903	-22.668	85.331	4.760	PK
3			5700.000	63.081	58.203	-42.119	105.200	4.878	PK
4			5707.580	71.403	66.484	-35.922	107.325	4.918	PK
5			5720.000	77.650	72.653	-33.150	110.800	4.997	PK
6			5722.513	85.885	80.872	-30.646	116.531	5.014	PK
7			5725.000	86.398	81.369	-35.802	122.200	5.029	PK
8			5732.495	93.481	88.404	-28.719	122.200	5.076	PK
9		*	5737.445	118.108	113.000	N/A	N/A	5.108	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/27 - 00:27
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11ac-VHT20 at Channel 5825MHz	

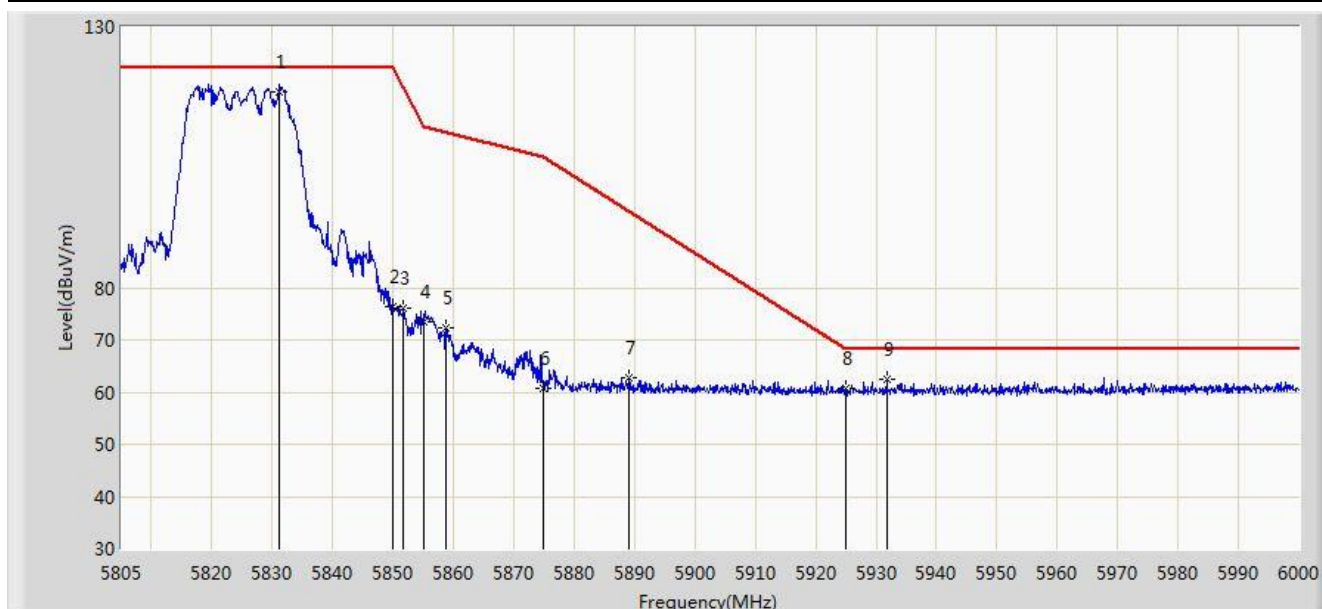

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5831.033	117.494	111.871	N/A	N/A	5.623	PK
2			5850.000	76.442	70.716	-45.758	122.200	5.726	PK
3			5851.703	76.141	70.408	-42.175	118.316	5.732	PK
4			5855.000	73.368	67.622	-37.432	110.800	5.746	PK
5			5858.723	72.198	66.436	-37.558	109.756	5.761	PK
6			5875.000	60.800	54.980	-44.400	105.200	5.820	PK
7			5888.947	62.733	56.865	-32.115	94.848	5.867	PK
8			5925.000	60.690	54.724	-7.510	68.200	5.967	PK
9			5931.750	62.477	56.494	-5.723	68.200	5.983	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)