


Site: AC1	Time: 2020/04/05 - 11:19
Limit: NCC LP0002_1GHz-40GHz	Engineer: Fran Chen
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE40 at Channel 2422MHz with OAW-AP1361D (Beam-Forming Mode)	

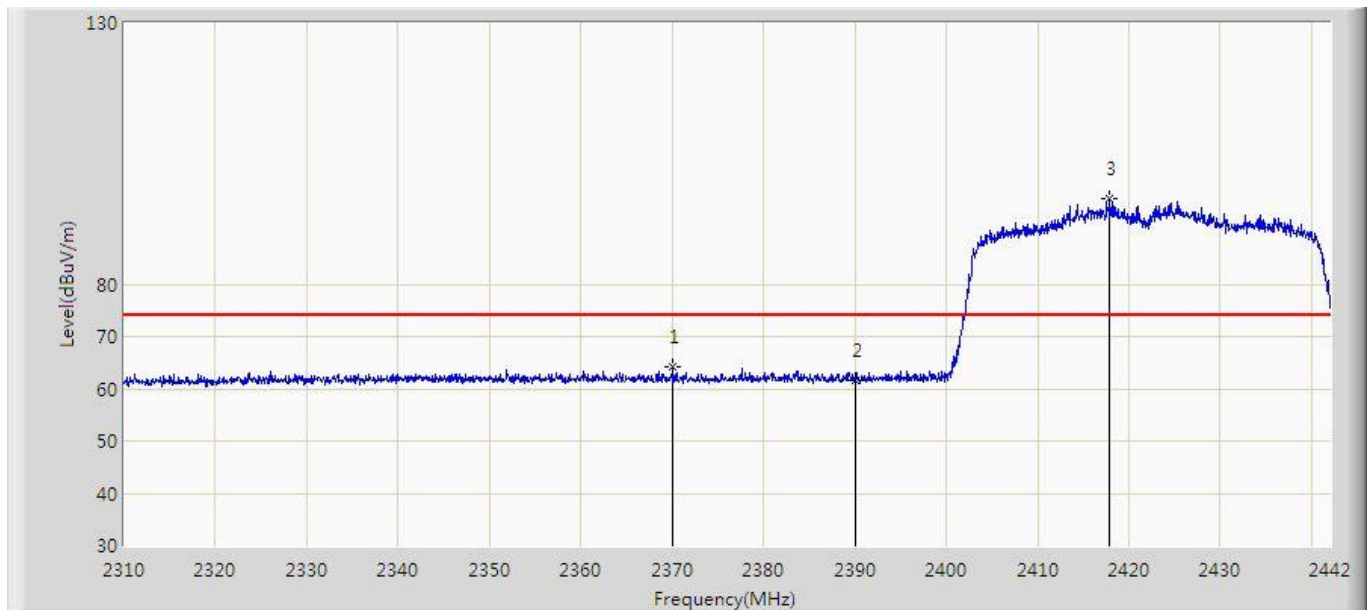


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2370.126	64.271	32.088	-9.729	74.000	32.183	PK
2			2390.000	61.463	29.189	-12.537	74.000	32.274	PK
3		*	2417.910	96.280	63.878	N/A	N/A	32.402	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB).

Site: AC1	Time: 2020/04/05 - 11:22
Limit: NCC LP0002_1GHz-40GHz	Engineer: Fran Chen
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE40 at Channel 2422MHz with OAW-AP1361D (Beam-Forming Mode)	

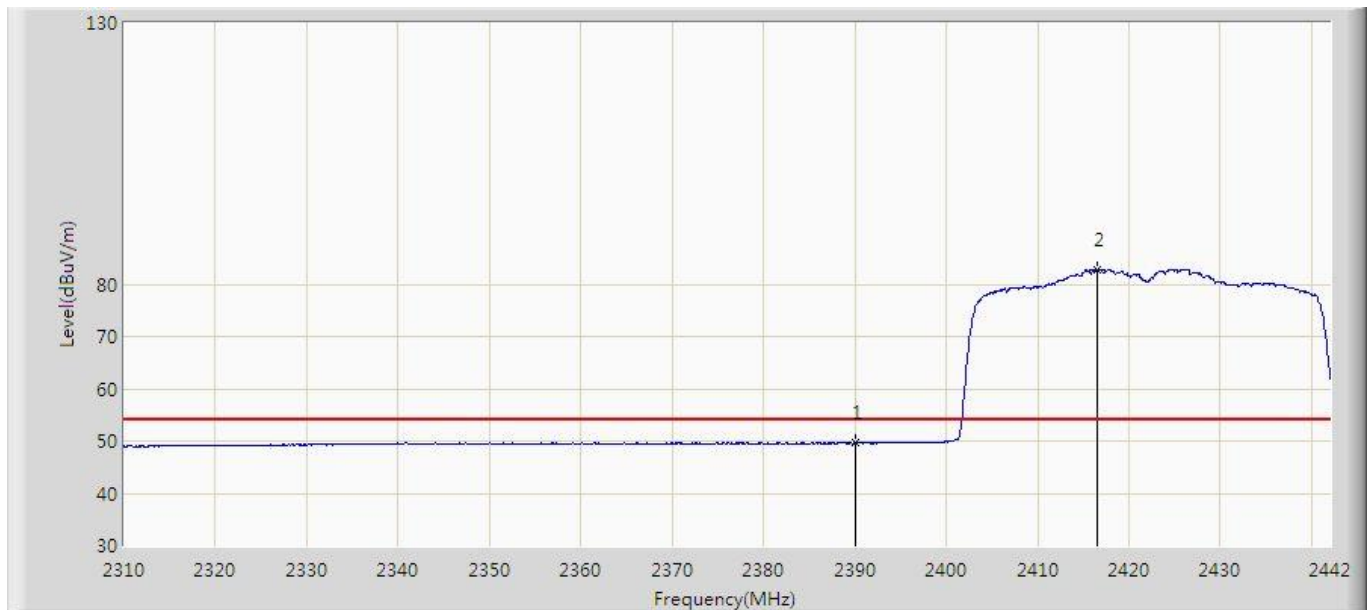


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	49.622	17.348	-4.378	54.000	32.274	AV
2		*	2416.458	82.832	50.437	N/A	N/A	32.395	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB).

Site: AC1	Time: 2020/04/05 - 11:23
Limit: NCC LP0002_1GHz-40GHz	Engineer: Fran Chen
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE40 at Channel 2452MHz with OAW-AP1361D (Beam-Forming Mode)	

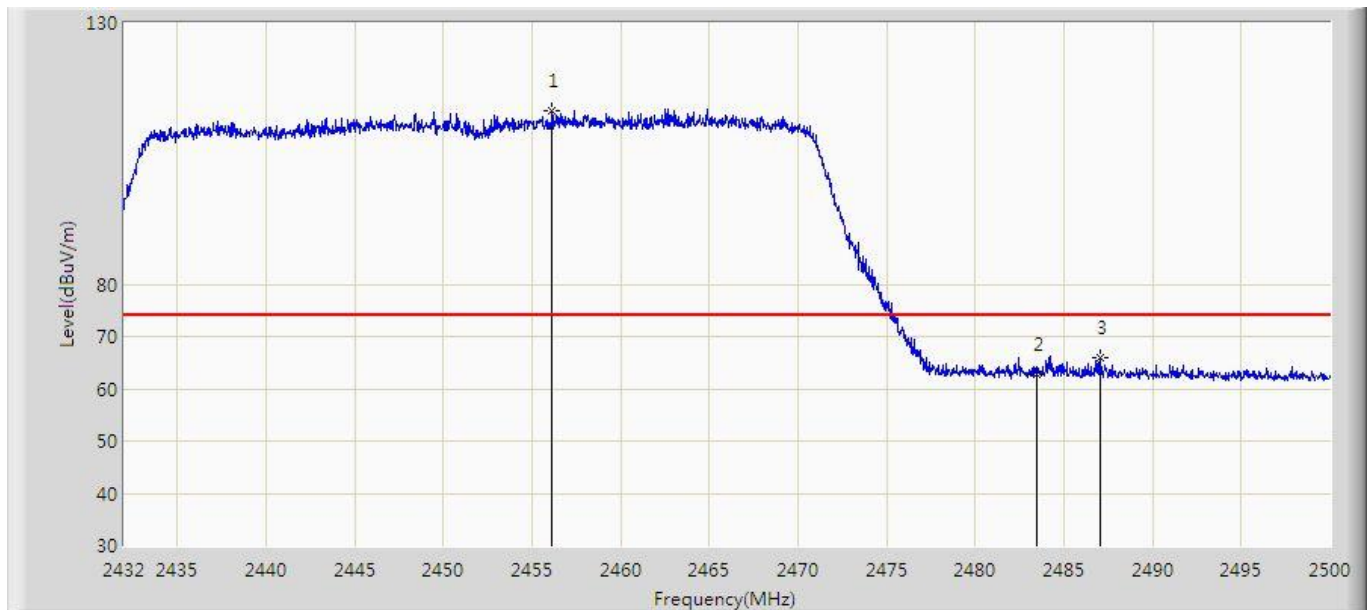


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2456.140	113.148	80.570	N/A	N/A	32.578	PK
2			2483.500	62.745	30.041	-11.255	74.000	32.704	PK
3			2487.080	65.973	33.252	-8.027	74.000	32.721	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB).

Site: AC1	Time: 2020/04/05 - 11:25
Limit: NCC LP0002_1GHz-40GHz	Engineer: Fran Chen
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE40 at Channel 2452MHz with OAW-AP1361D (Beam-Forming Mode)	

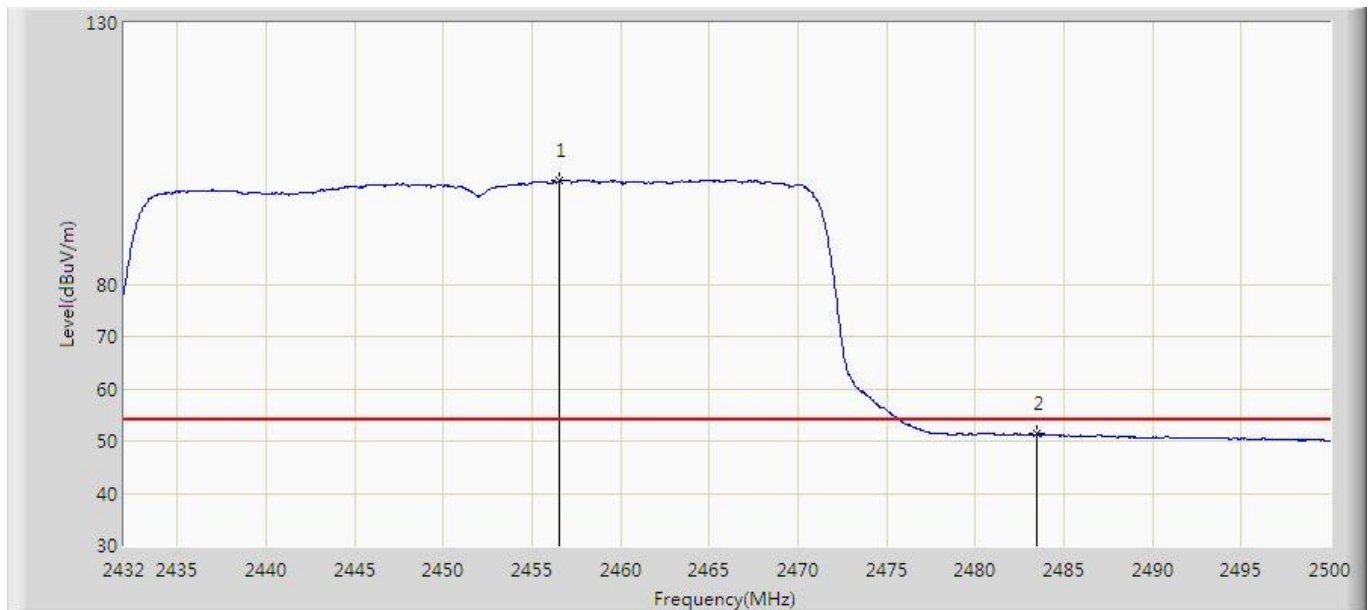


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2456.548	99.732	67.152	N/A	N/A	32.580	AV
2			2483.500	51.327	18.623	-2.673	54.000	32.704	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB).

Site: AC1	Time: 2020/04/05 - 11:26
Limit: NCC LP0002_1GHz-40GHz	Engineer: Fran Chen
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE40 at Channel 2452MHz with OAW-AP1361D (Beam-Forming Mode)	

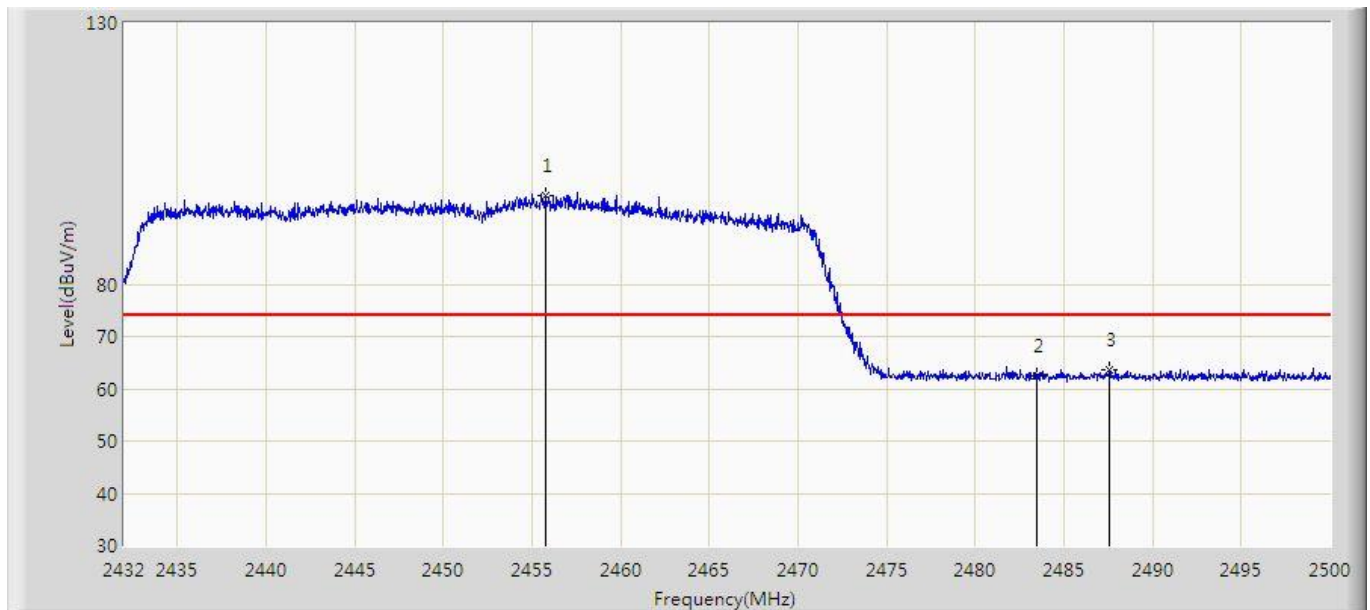


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2455.732	96.994	64.417	N/A	N/A	32.577	PK
2			2483.500	62.396	29.692	-11.604	74.000	32.704	PK
3			2487.590	63.762	31.039	-10.238	74.000	32.723	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB).

Site: AC1	Time: 2020/04/05 - 11:26
Limit: NCC LP0002_1GHz-40GHz	Engineer: Fran Chen
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE40 at Channel 2452MHz with OAW-AP1361D (Beam-Forming Mode)	

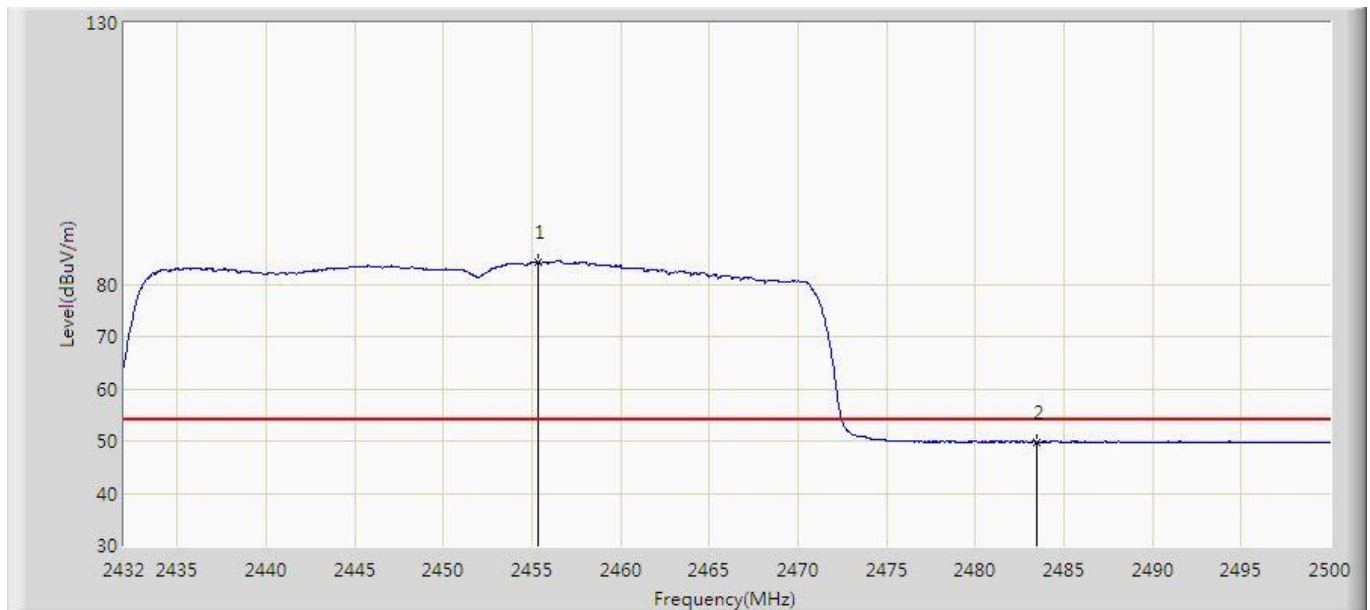


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2455.324	84.315	51.740	N/A	N/A	32.575	AV
2			2483.500	49.846	17.142	-4.154	54.000	32.704	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB).

Site: AC1	Time: 2020/04/03 - 11:07
Limit: NCC LP0002_1GHz-40GHz	Engineer: Fran Chen
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11b at Channel 2412MHz with OAW-AP1361D - Scan Antenna	

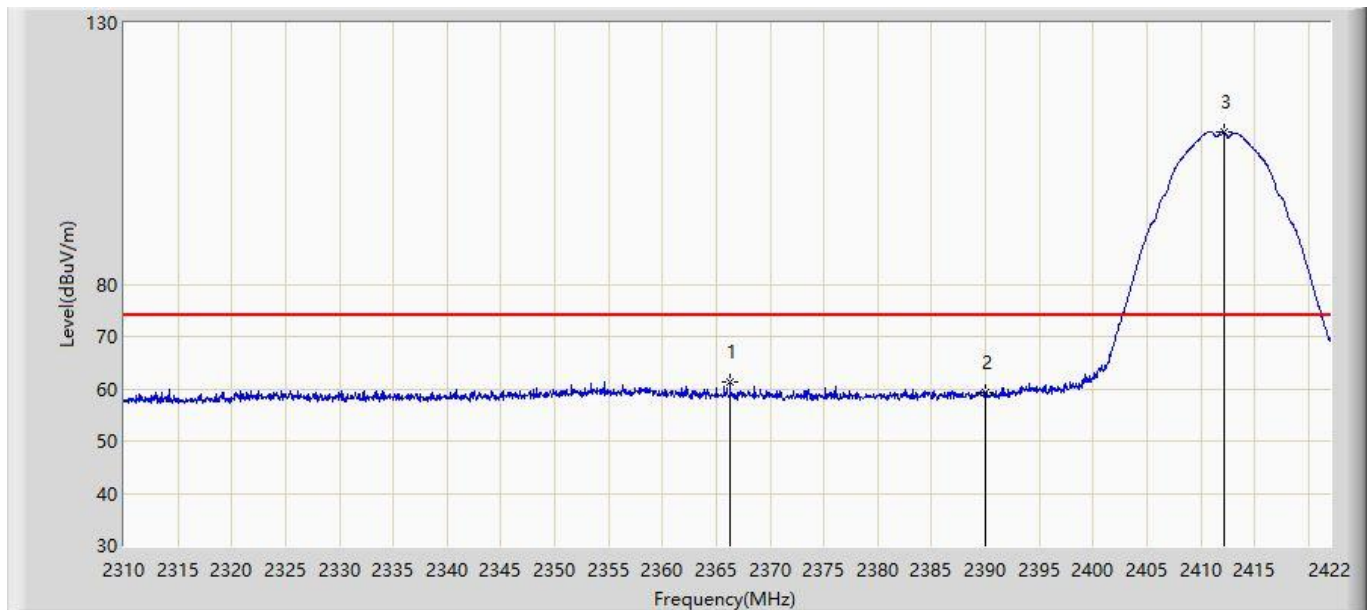


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2366.280	61.235	29.070	-12.765	74.000	32.165	PK
2			2390.000	59.183	26.909	-14.817	74.000	32.274	PK
3		*	2412.200	109.013	76.638	N/A	N/A	32.375	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2020/04/03 - 11:15
Limit: NCC LP0002_1GHz-40GHz	Engineer: Fran Chen
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11b at Channel 2412MHz with OAW-AP1361D - Scan Antenna	

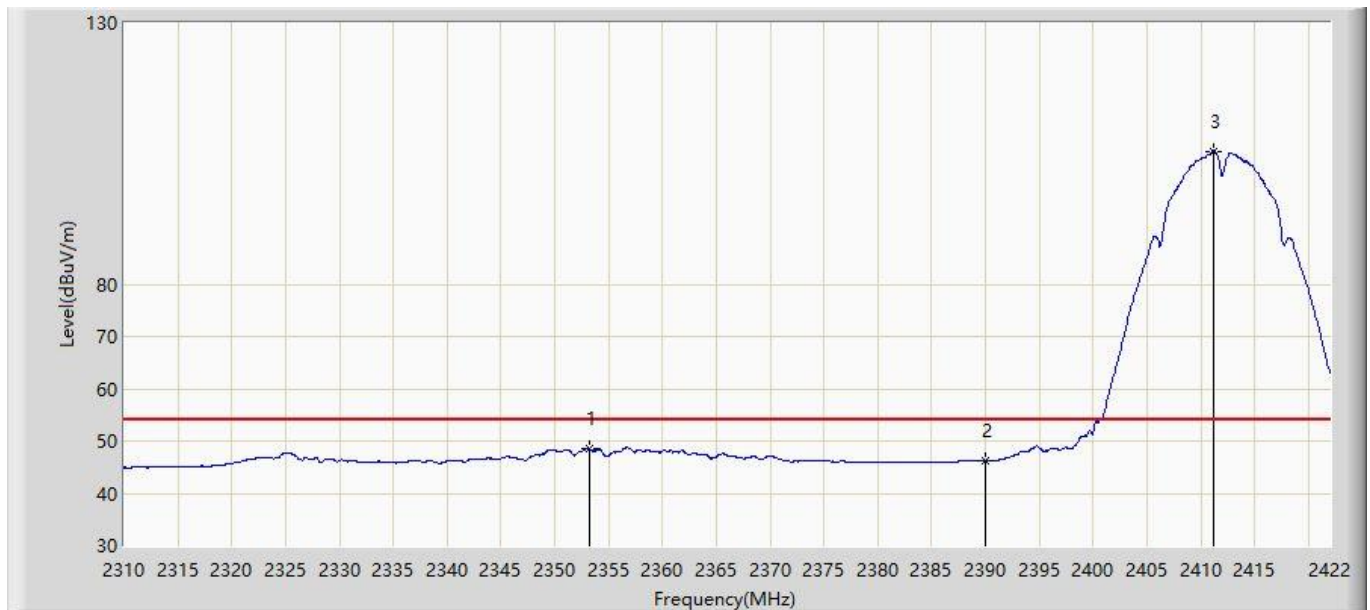


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2353.232	48.595	17.676	-5.405	54.000	30.919	AV
2			2390.000	46.177	15.173	-7.823	54.000	31.004	AV
3		*	2411.248	105.408	74.390	N/A	N/A	31.018	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2020/04/03 - 11:24
Limit: NCC LP0002_1GHz-40GHz	Engineer: Fran Chen
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11b at Channel 2412MHz with OAW-AP1361D - Scan Antenna	

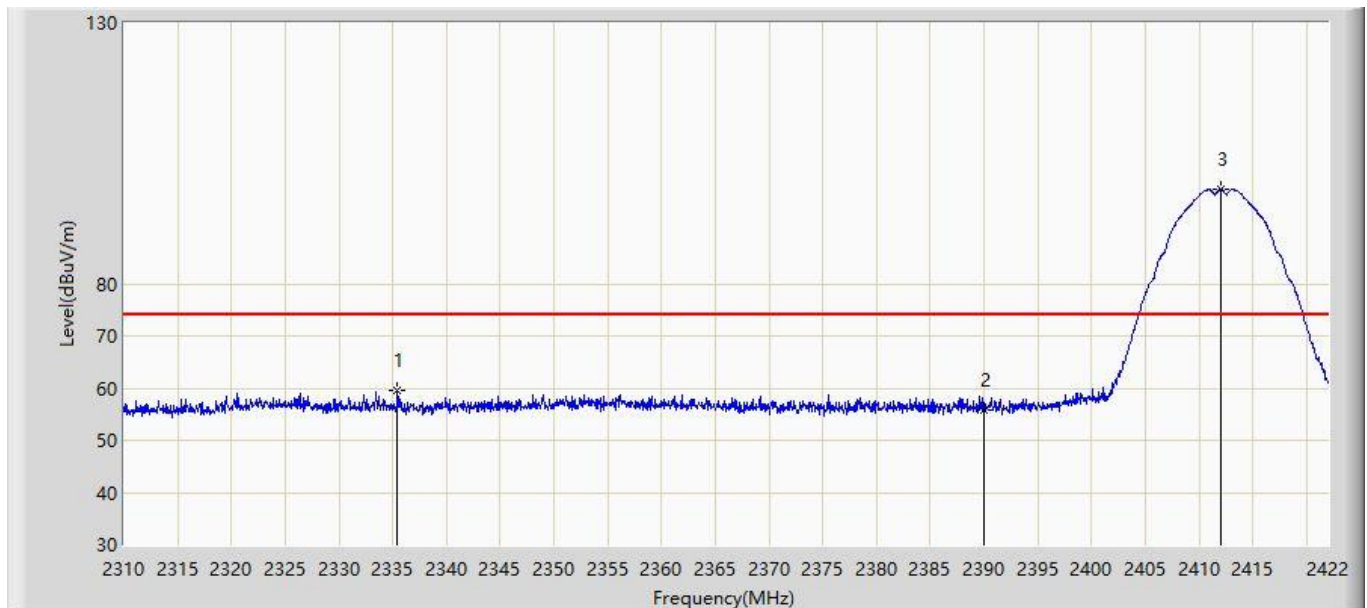


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2335.424	59.563	27.540	-14.437	74.000	32.022	PK
2			2390.000	55.815	23.541	-18.185	74.000	32.274	PK
3		*	2411.976	96.182	63.808	N/A	N/A	32.374	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2020/04/03 - 11:27
Limit: NCC LP0002_1GHz-40GHz	Engineer: Fran Chen
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11b at Channel 2412MHz with OAW-AP1361D - Scan Antenna	

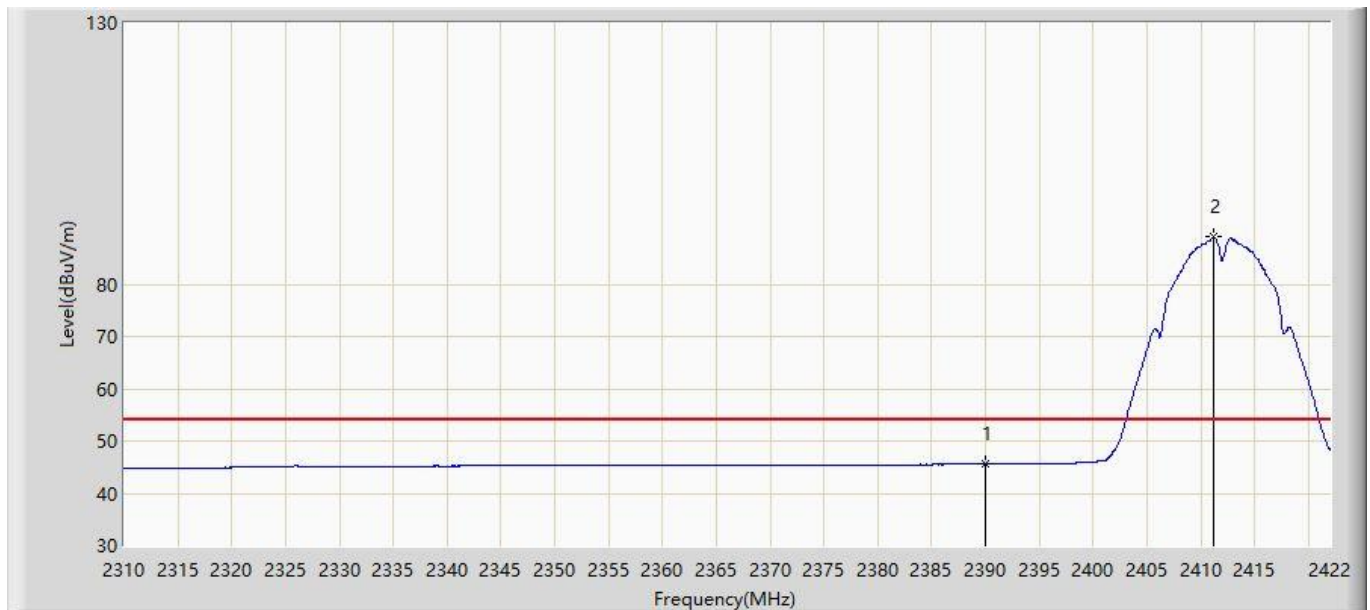


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	45.601	14.597	-8.399	54.000	31.004	AV
2		*	2411.248	89.038	58.020	N/A	N/A	31.018	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2020/04/03 - 11:33
Limit: NCC LP0002_1GHz-40GHz	Engineer: Fran Chen
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11b at Channel 2462MHz with OAW-AP1361D - Scan Antenna	

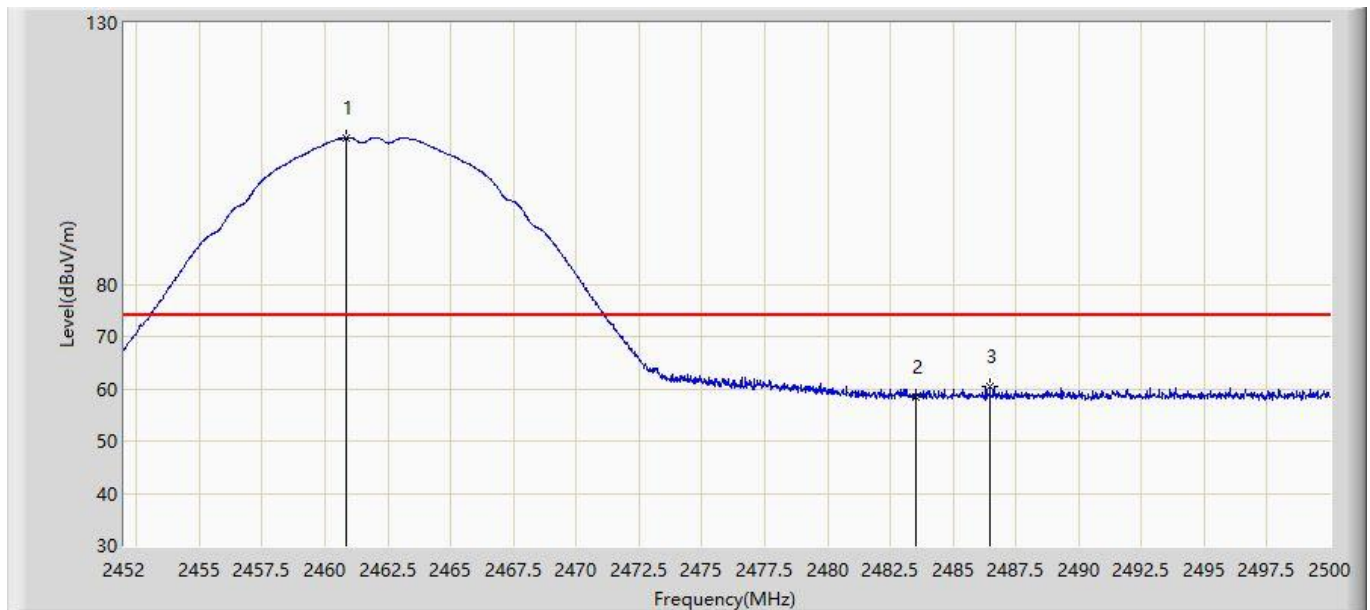

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2460.856	107.967	77.056	N/A	N/A	30.911	PK
2			2483.500	58.541	27.739	-15.459	74.000	30.802	PK
3			2486.464	60.299	29.506	-13.701	74.000	30.794	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2020/04/03 - 11:38
Limit: NCC LP0002_1GHz-40GHz	Engineer: Fran Chen
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11b at Channel 2462MHz with OAW-AP1361D - Scan Antenna	




No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2461.312	104.640	73.732	N/A	N/A	30.908	AV
2			2483.500	46.271	15.469	-7.729	54.000	30.802	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2020/04/03 - 11:41
Limit: NCC LP0002_1GHz-40GHz	Engineer: Fran Chen
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11b at Channel 2462MHz with OAW-AP1361D - Scan Antenna	

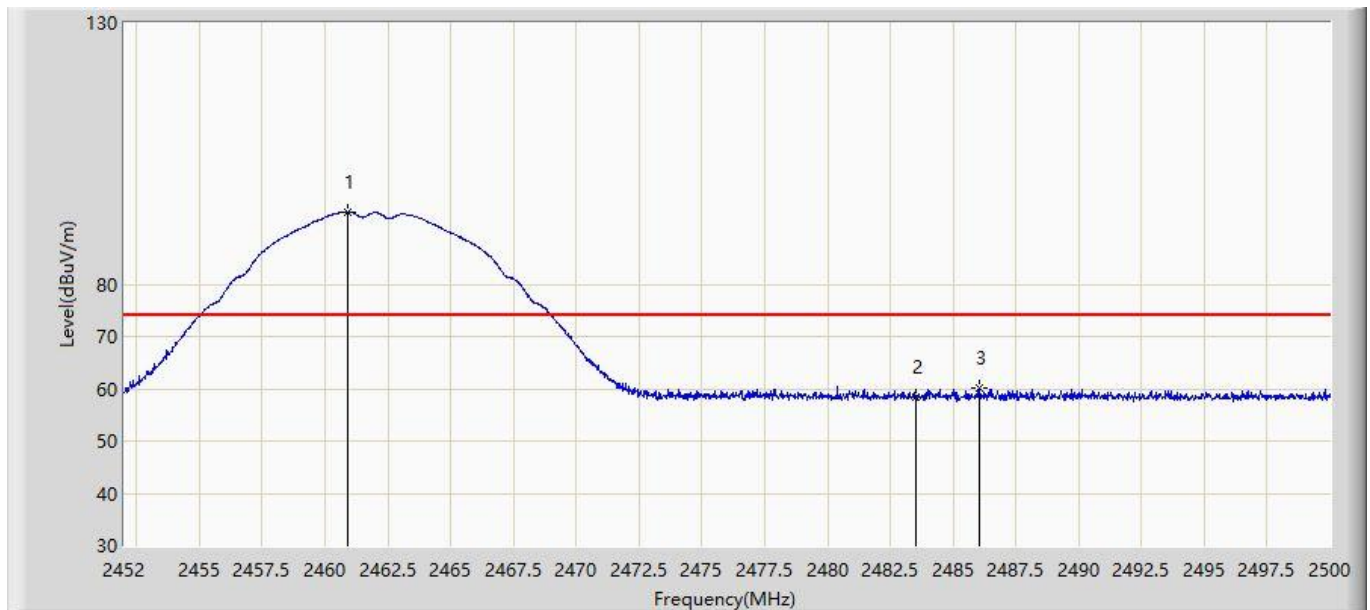


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2460.928	93.836	62.926	N/A	N/A	30.910	PK
2			2483.500	58.399	27.597	-15.601	74.000	30.802	PK
3			2486.032	60.269	29.474	-13.731	74.000	30.794	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2020/04/03 - 11:44
Limit: NCC LP0002_1GHz-40GHz	Engineer: Fran Chen
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11b at Channel 2462MHz with OAW-AP1361D - Scan Antenna	

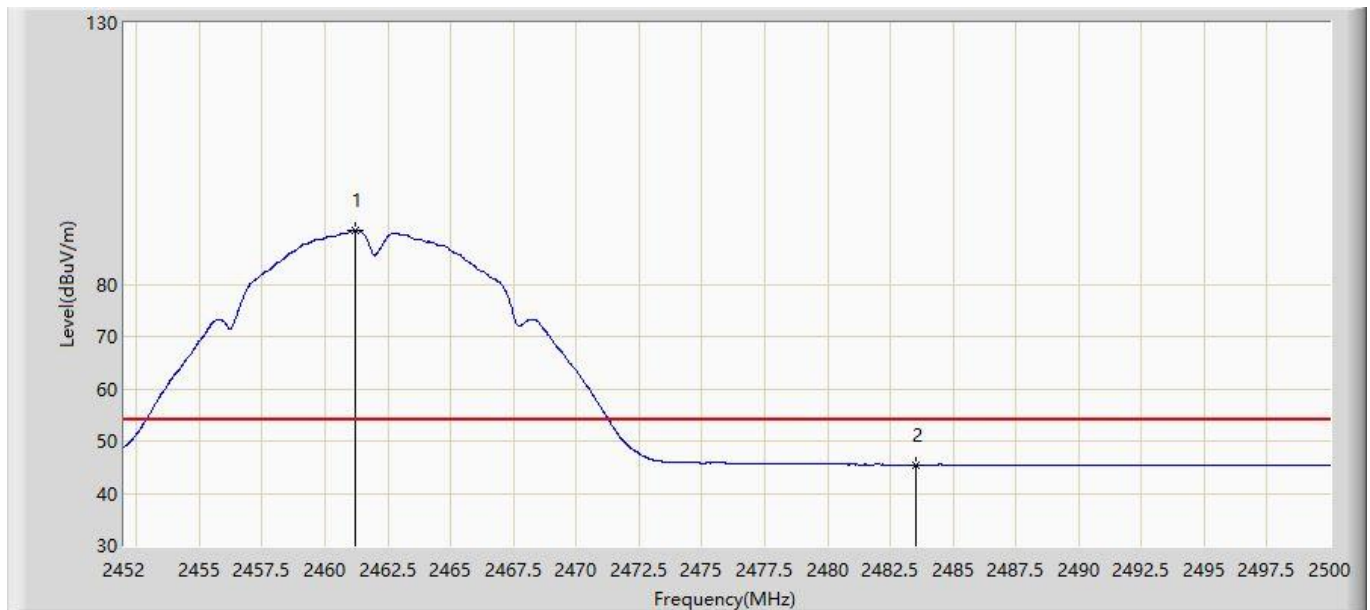


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2461.216	90.420	59.511	N/A	N/A	30.909	AV
2			2483.500	45.472	14.670	-8.528	54.000	30.802	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2020/04/03 - 11:45
Limit: NCC LP0002_1GHz-40GHz	Engineer: Fran Chen
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11g at Channel 2412MHz with OAW-AP1361D - Scan Antenna	

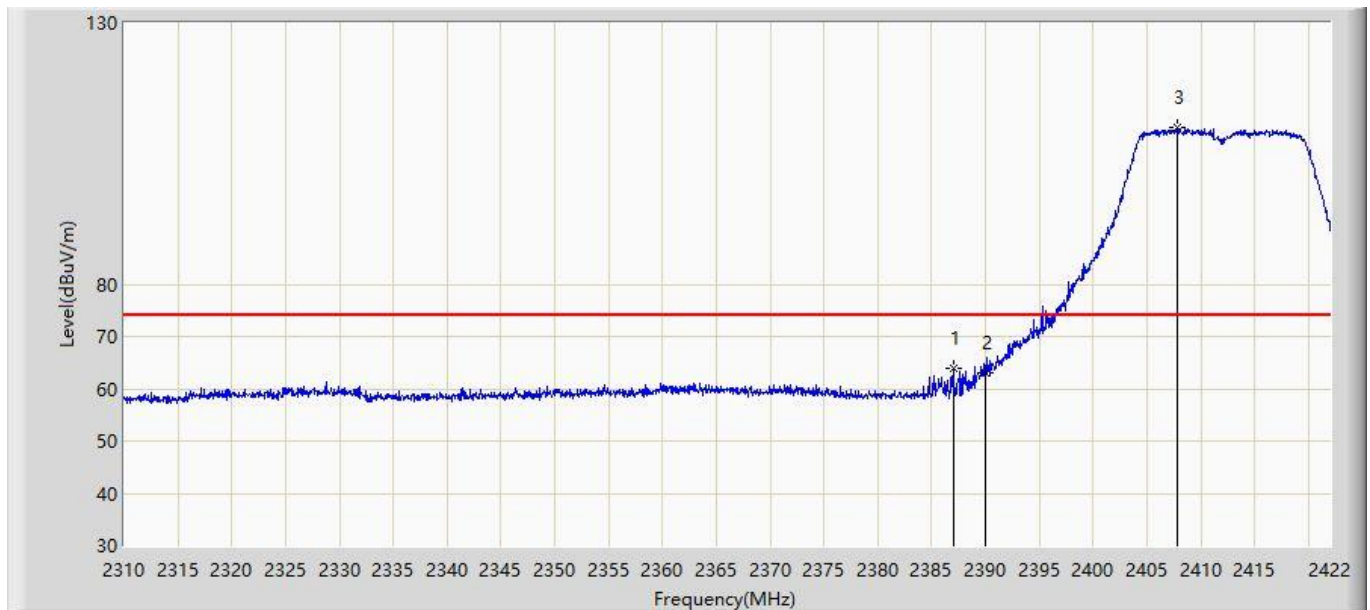


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2387.000	63.850	32.852	-10.150	74.000	30.998	PK
2			2390.000	63.099	32.095	-10.901	74.000	31.004	PK
3		*	2407.888	110.102	79.086	N/A	N/A	31.016	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2020/04/03 - 11:53
Limit: NCC LP0002_1GHz-40GHz	Engineer: Fran Chen
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11g at Channel 2412MHz with OAW-AP1361D - Scan Antenna	

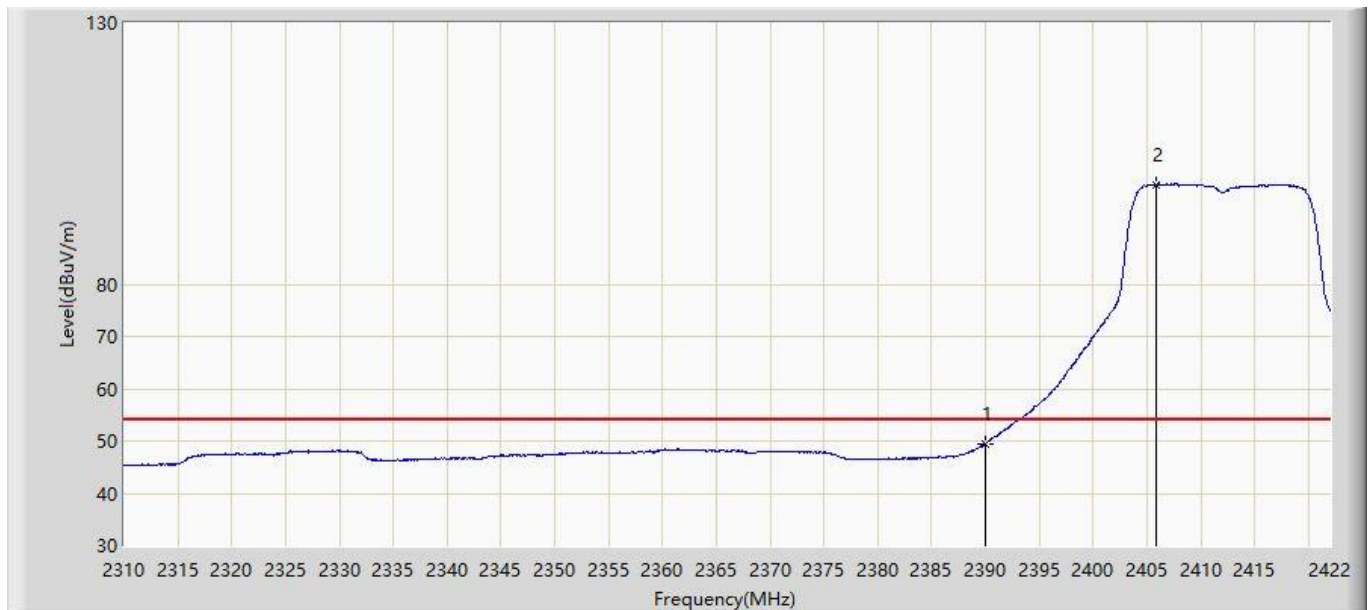


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	49.506	18.502	-4.494	54.000	31.004	AV
2		*	2405.816	99.117	68.102	N/A	N/A	31.016	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2020/04/03 - 11:55
Limit: NCC LP0002_1GHz-40GHz	Engineer: Fran Chen
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11g at Channel 2412MHz with OAW-AP1361D - Scan Antenna	

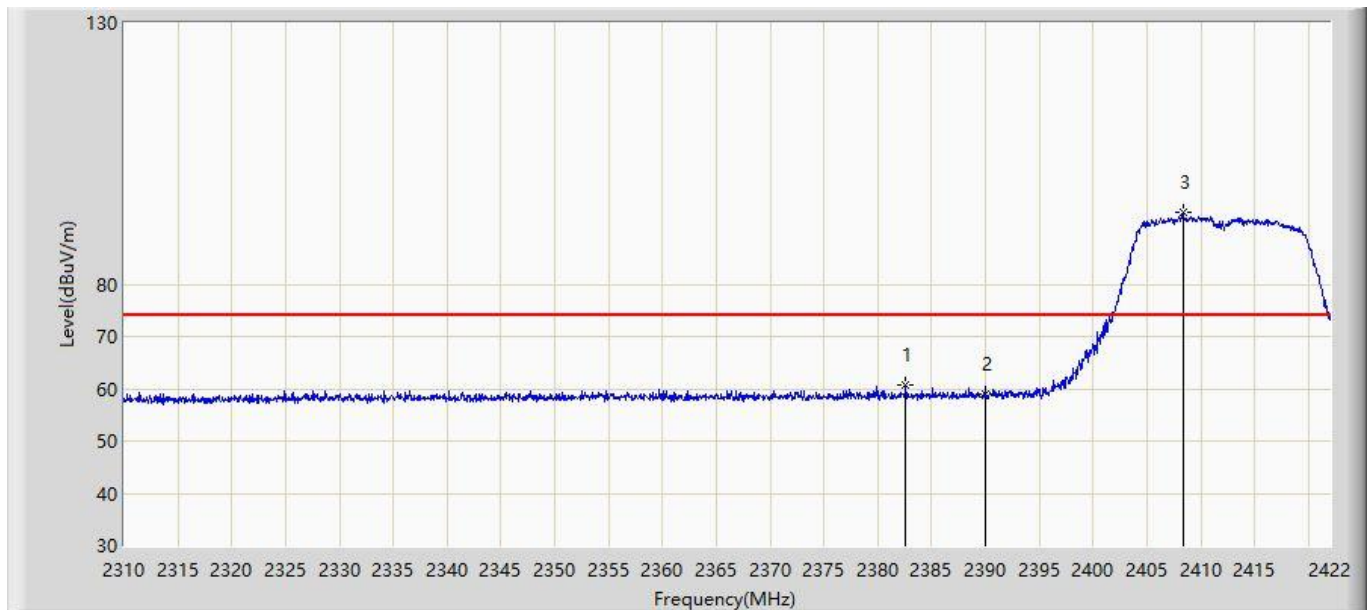


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2382.576	60.777	29.788	-13.223	74.000	30.989	PK
2			2390.000	59.065	28.061	-14.935	74.000	31.004	PK
3		*	2408.392	93.758	62.742	N/A	N/A	31.017	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2020/04/03 - 11:59
Limit: NCC LP0002_1GHz-40GHz	Engineer: Fran Chen
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11g at Channel 2412MHz with OAW-AP1361D - Scan Antenna	

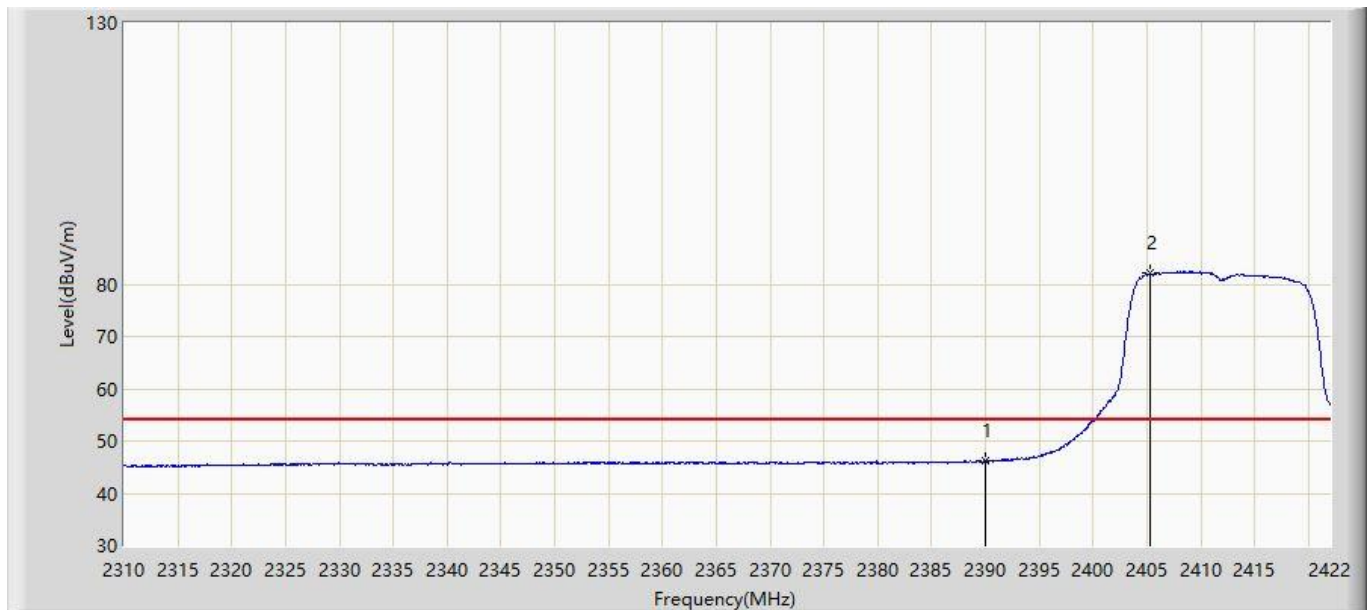


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	46.098	15.094	-7.902	54.000	31.004	AV
2		*	2405.368	82.045	51.030	N/A	N/A	31.015	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2020/04/03 - 13:15
Limit: NCC LP0002_1GHz-40GHz	Engineer: Fran Chen
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11g at Channel 2462MHz with OAW-AP1361D - Scan Antenna	

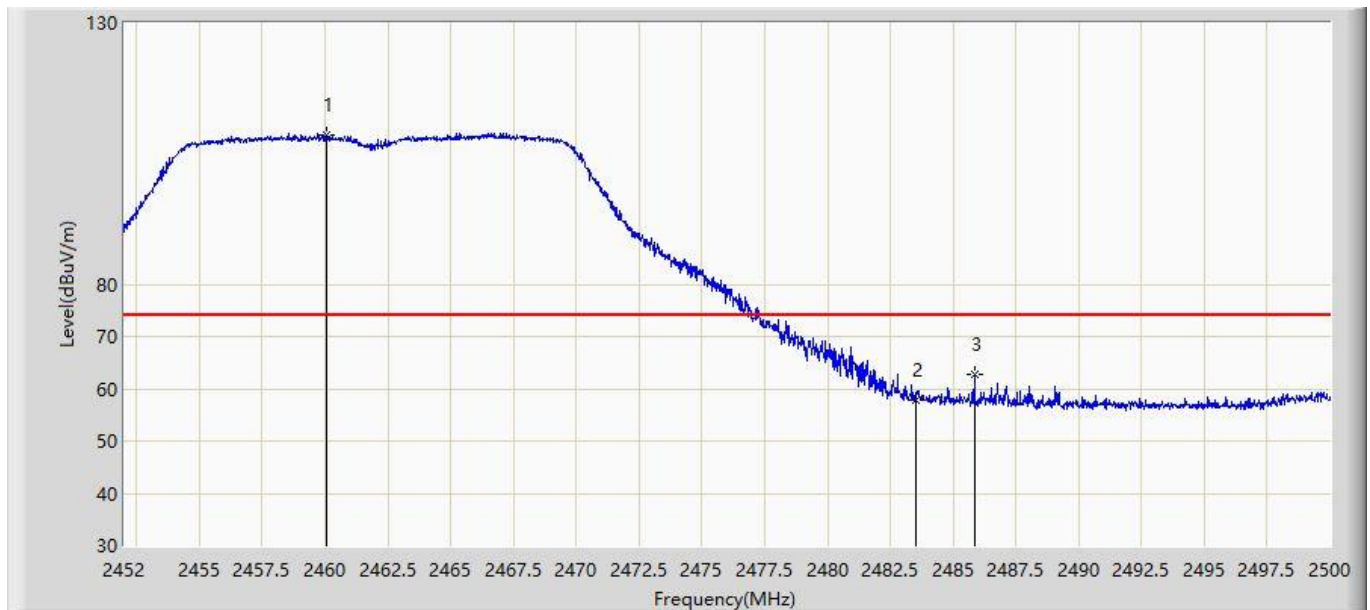


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2460.088	108.523	77.609	N/A	N/A	30.914	PK
2			2483.500	57.952	27.150	-16.048	74.000	30.802	PK
3			2485.840	62.684	31.889	-11.316	74.000	30.795	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2020/04/03 - 13:19
Limit: NCC LP0002_1GHz-40GHz	Engineer: Fran Chen
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11g at Channel 2462MHz with OAW-AP1361D - Scan Antenna	

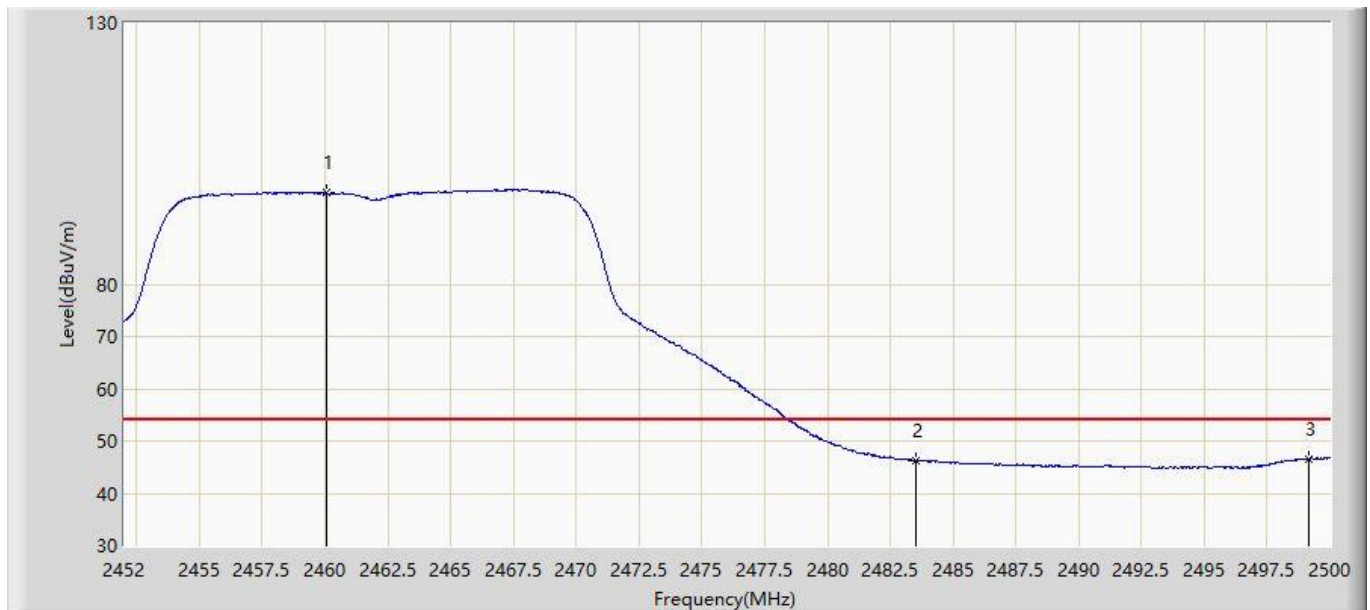


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2460.040	97.556	66.641	N/A	N/A	30.914	AV
2			2483.500	46.238	15.436	-7.762	54.000	30.802	AV
3			2499.184	46.616	15.862	-7.384	54.000	30.754	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2020/04/03 - 13:21
Limit: NCC LP0002_1GHz-40GHz	Engineer: Fran Chen
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11g at Channel 2462MHz with OAW-AP1361D - Scan Antenna	

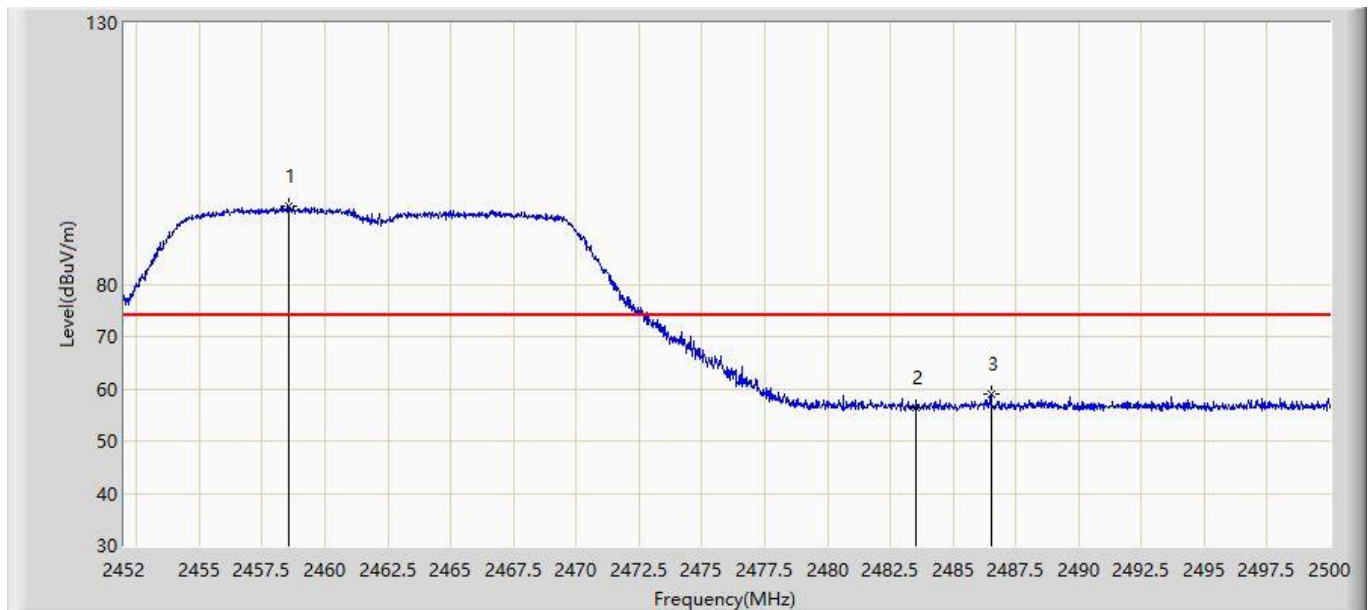


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2458.552	94.856	63.934	N/A	N/A	30.922	PK
2			2483.500	56.308	25.506	-17.692	74.000	30.802	PK
3			2486.512	59.109	28.316	-14.891	74.000	30.793	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2020/04/03 - 13:23
Limit: NCC LP0002_1GHz-40GHz	Engineer: Fran Chen
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11g at Channel 2462MHz with OAW-AP1361D - Scan Antenna	

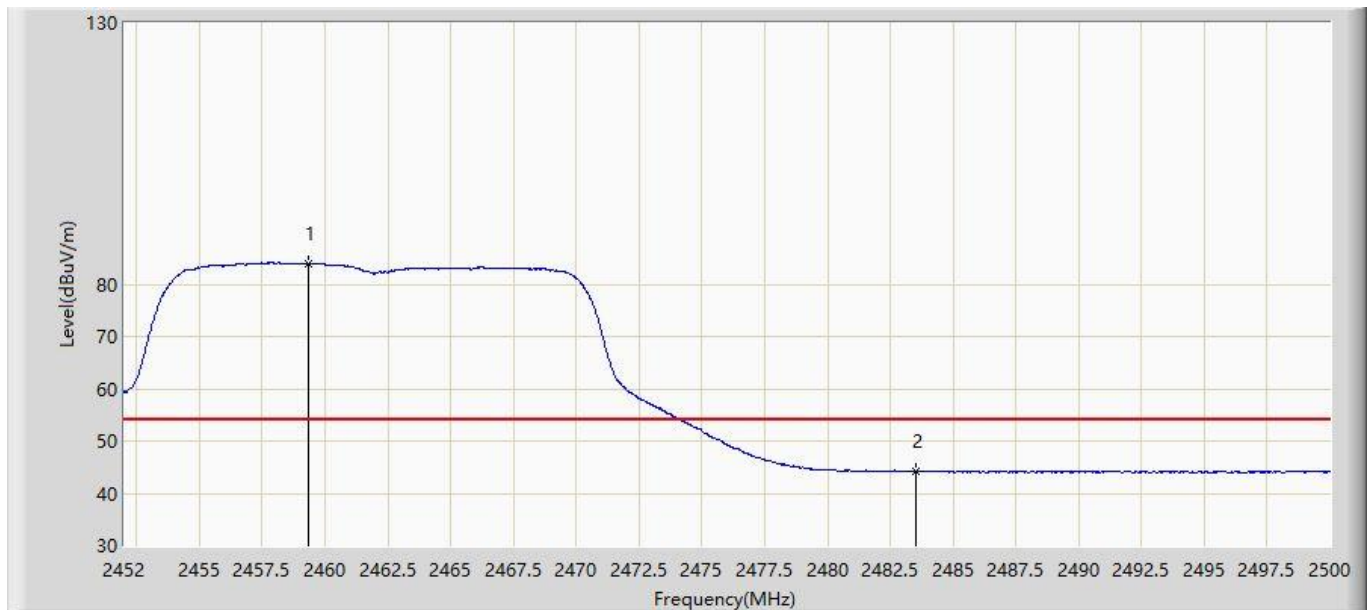


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2459.320	83.908	52.990	N/A	N/A	30.918	AV
2			2483.500	44.179	13.377	-9.821	54.000	30.802	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Mode No.: OAW-AP1362

Site: AC1	Time: 2020/03/19 - 10:18
Limit: NCC LP0002_1GHz-40GHz	Engineer: Fran Chen
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11b at Channel 2412MHz with OAW-AP1362 (CDD Mode)	

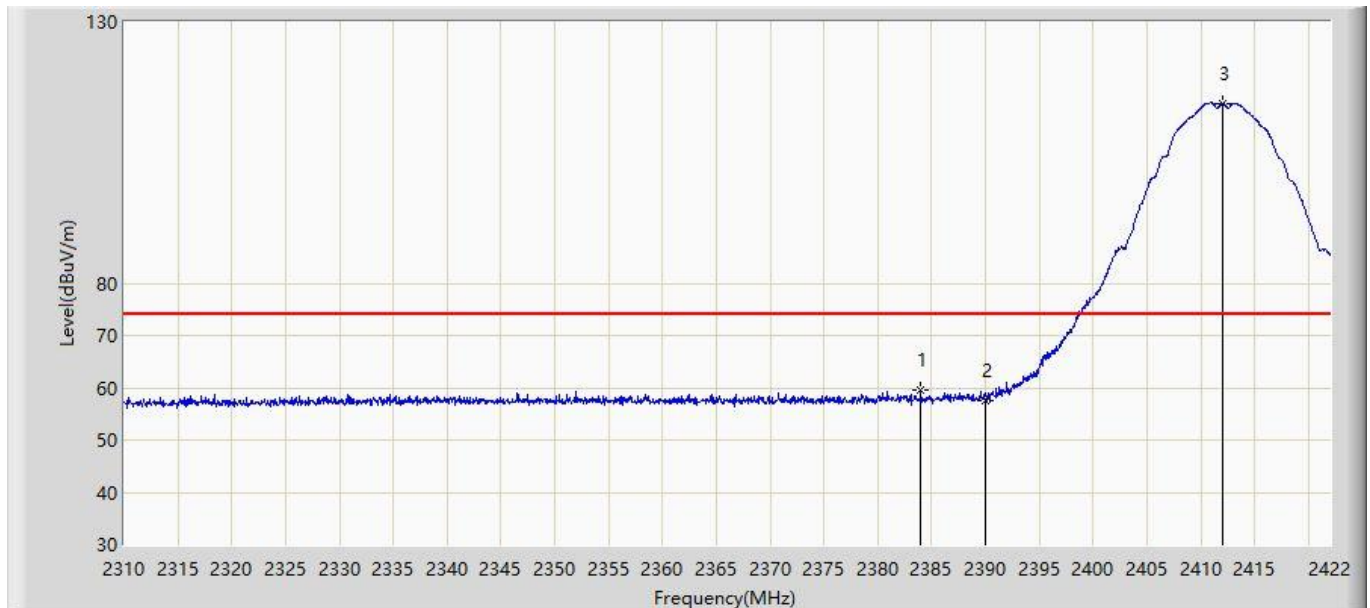


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2383.976	59.661	27.414	-14.339	74.000	32.247	PK
2			2390.000	57.597	25.323	-16.403	74.000	32.274	PK
3		*	2412.032	114.381	82.006	N/A	N/A	32.375	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2020/03/19 - 10:25
Limit: NCC LP0002_1GHz-40GHz	Engineer: Fran Chen
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11b at Channel 2412MHz with OAW-AP1362 (CDD Mode)	

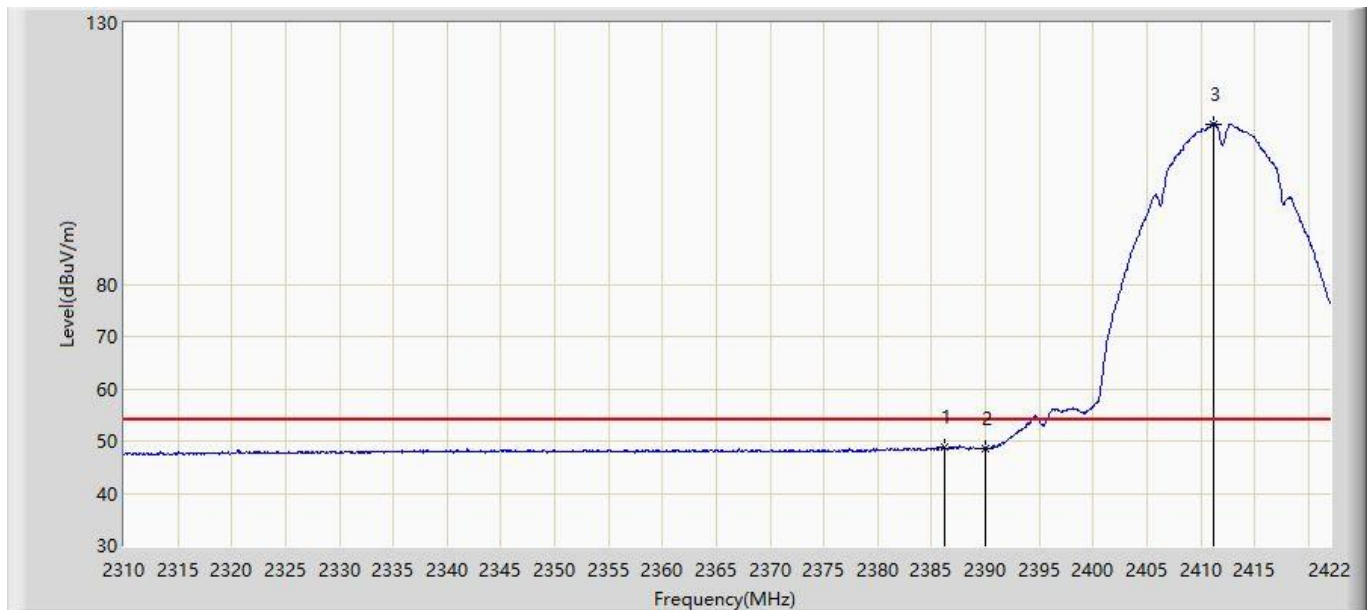


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2386.216	48.879	16.622	-5.121	54.000	32.256	AV
2			2390.000	48.633	16.359	-5.367	54.000	32.274	AV
3	X	*	2411.136	110.692	78.322	N/A	N/A	32.370	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2020/03/19 - 10:26
Limit: NCC LP0002_1GHz-40GHz	Engineer: Fran Chen
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11b at Channel 2412MHz with OAW-AP1362 (CDD Mode)	

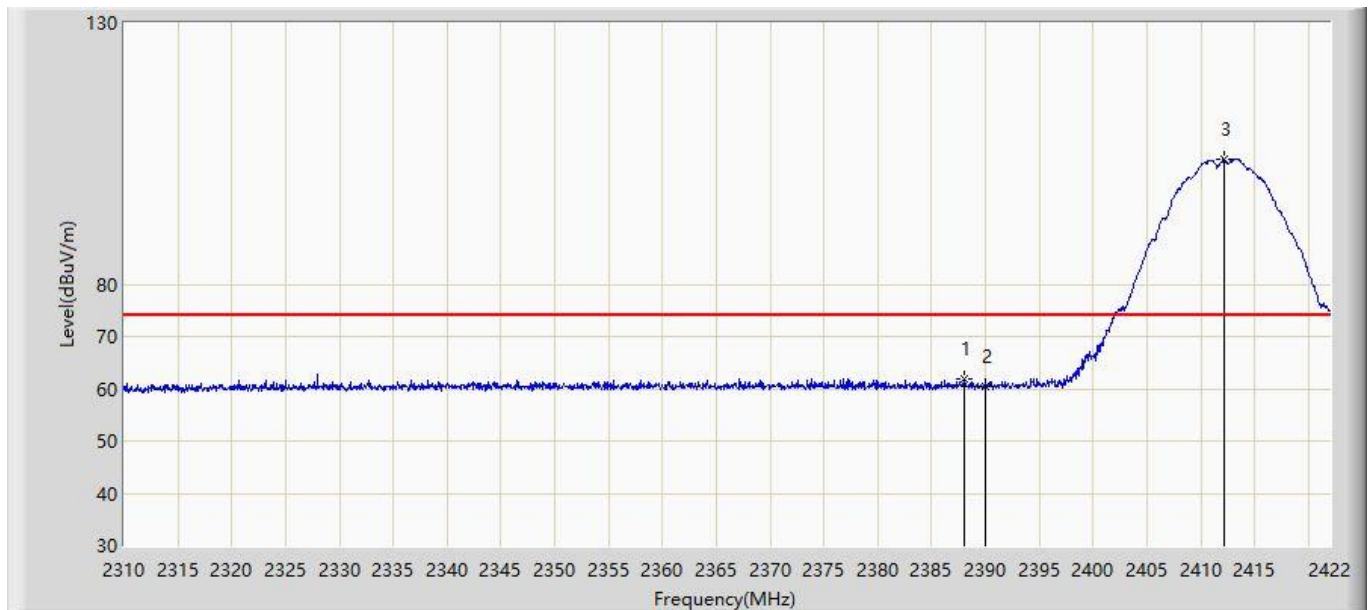


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2388.064	61.813	29.548	-12.187	74.000	32.266	PK
2			2390.000	60.547	28.273	-13.453	74.000	32.274	PK
3		*	2412.200	103.776	71.401	N/A	N/A	32.375	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2020/03/19 - 10:30
Limit: NCC LP0002_1GHz-40GHz	Engineer: Fran Chen
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11b at Channel 2412MHz with OAW-AP1362 (CDD Mode)	

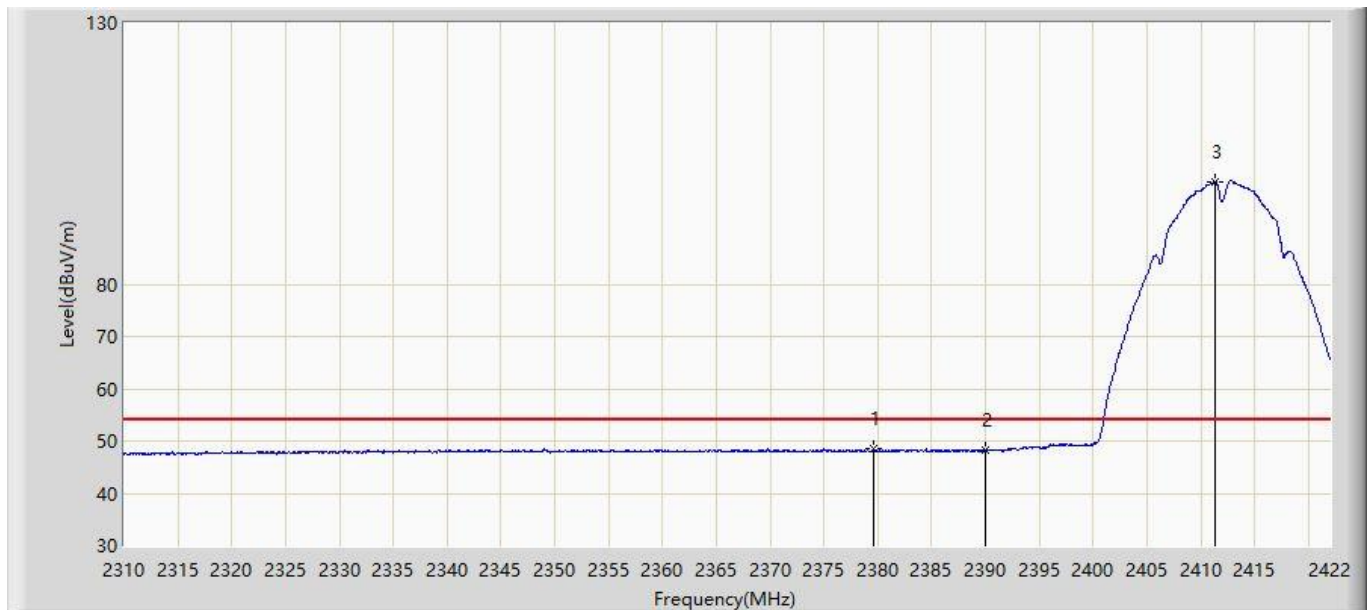


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2379.664	48.488	16.261	-5.512	54.000	32.226	AV
2			2390.000	48.162	15.888	-5.838	54.000	32.274	AV
3		*	2411.304	99.555	67.184	N/A	N/A	32.371	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2020/03/19 - 10:34
Limit: NCC LP0002_1GHz-40GHz	Engineer: Fran Chen
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11b at Channel 2462MHz with OAW-AP1362 (CDD Mode)	

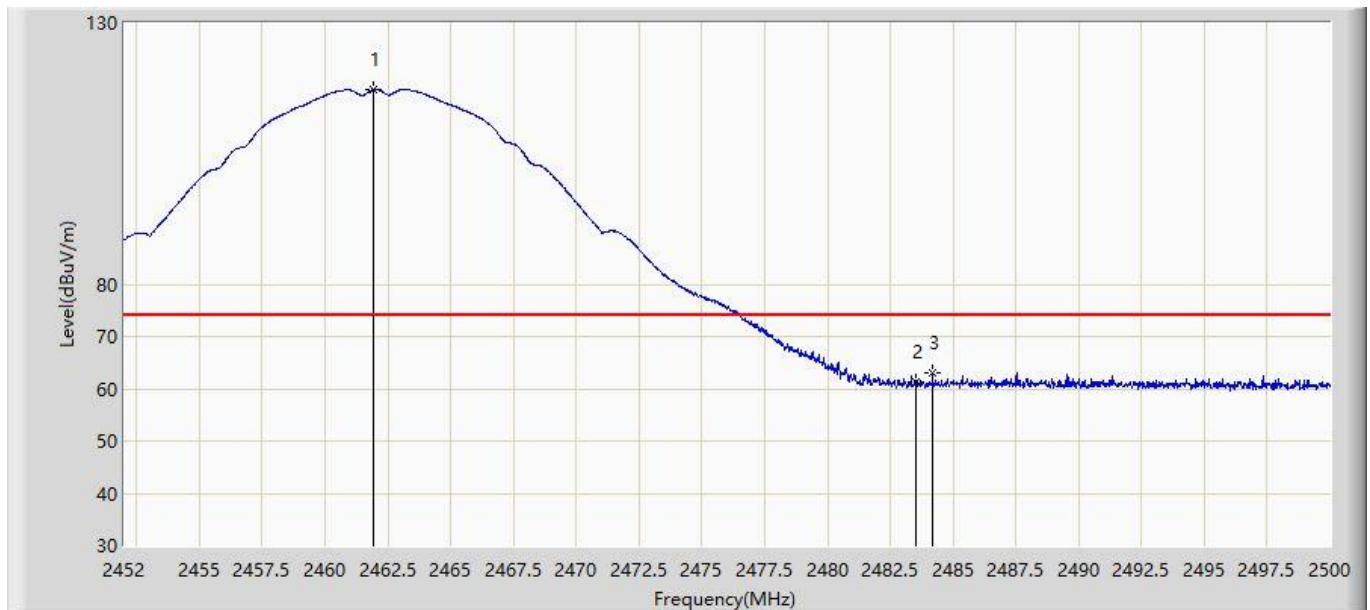


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2461.912	117.175	84.570	N/A	N/A	32.605	PK
2			2483.500	61.305	28.601	-12.695	74.000	32.704	PK
3			2484.184	62.984	30.276	-11.016	74.000	32.707	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2020/03/19 - 10:36
Limit: NCC LP0002_1GHz-40GHz	Engineer: Fran Chen
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11b at Channel 2462MHz with OAW-AP1362 (CDD Mode)	

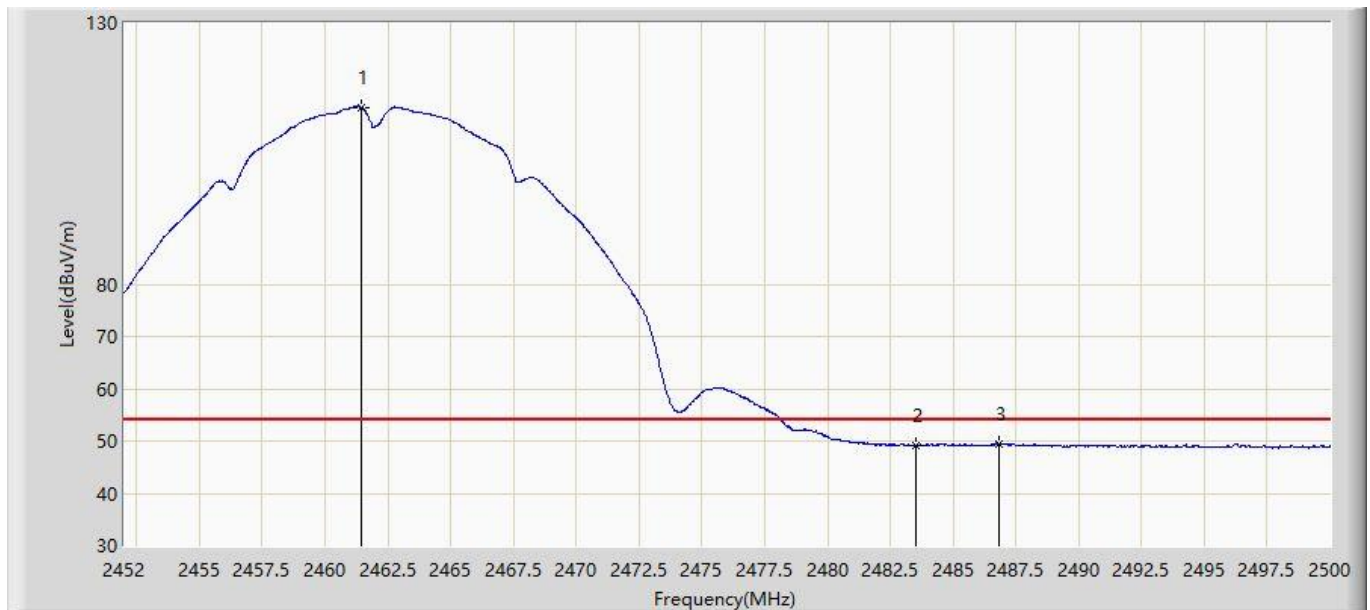


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	X	*	2461.456	113.737	81.134	N/A	N/A	32.603	AV
2			2483.500	49.114	16.410	-4.886	54.000	32.704	AV
3			2486.848	49.419	16.699	-4.581	54.000	32.719	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2020/03/19 - 10:37
Limit: NCC LP0002_1GHz-40GHz	Engineer: Fran Chen
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11b at Channel 2462MHz with OAW-AP1362 (CDD Mode)	

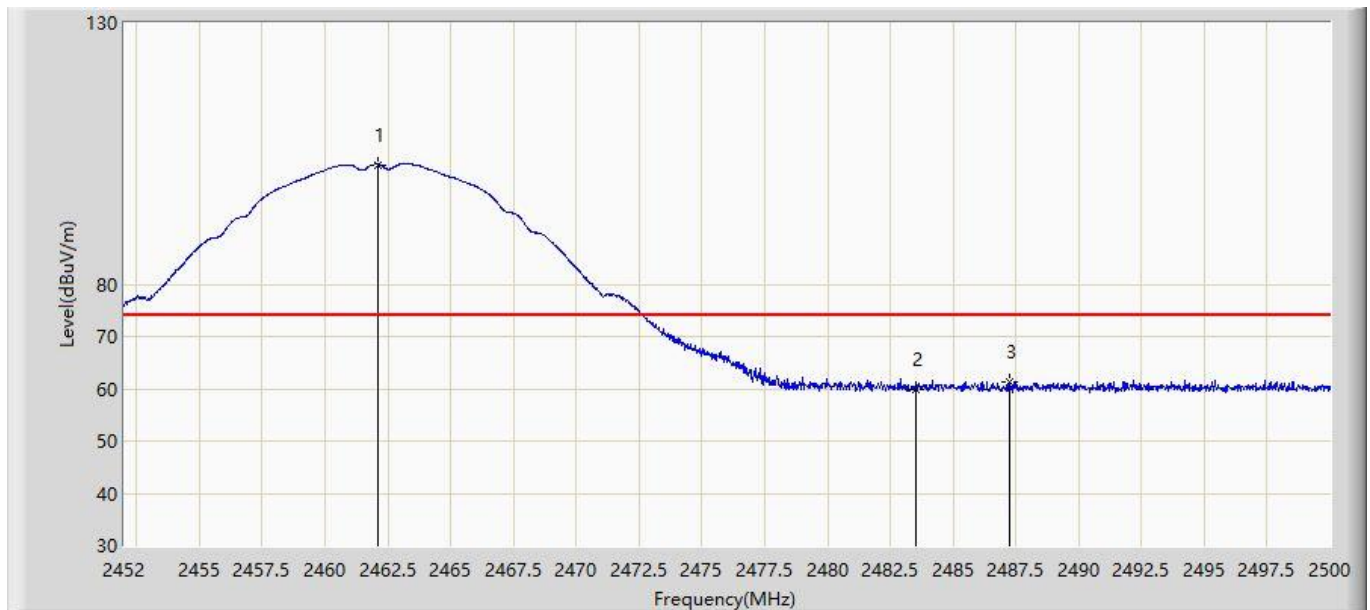


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2462.128	102.862	70.256	N/A	N/A	32.605	PK
2			2483.500	59.980	27.276	-14.020	74.000	32.704	PK
3			2487.232	61.338	28.617	-12.662	74.000	32.722	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2020/03/19 - 10:39
Limit: NCC LP0002_1GHz-40GHz	Engineer: Fran Chen
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11b at Channel 2462MHz with OAW-AP1362 (CDD Mode)	

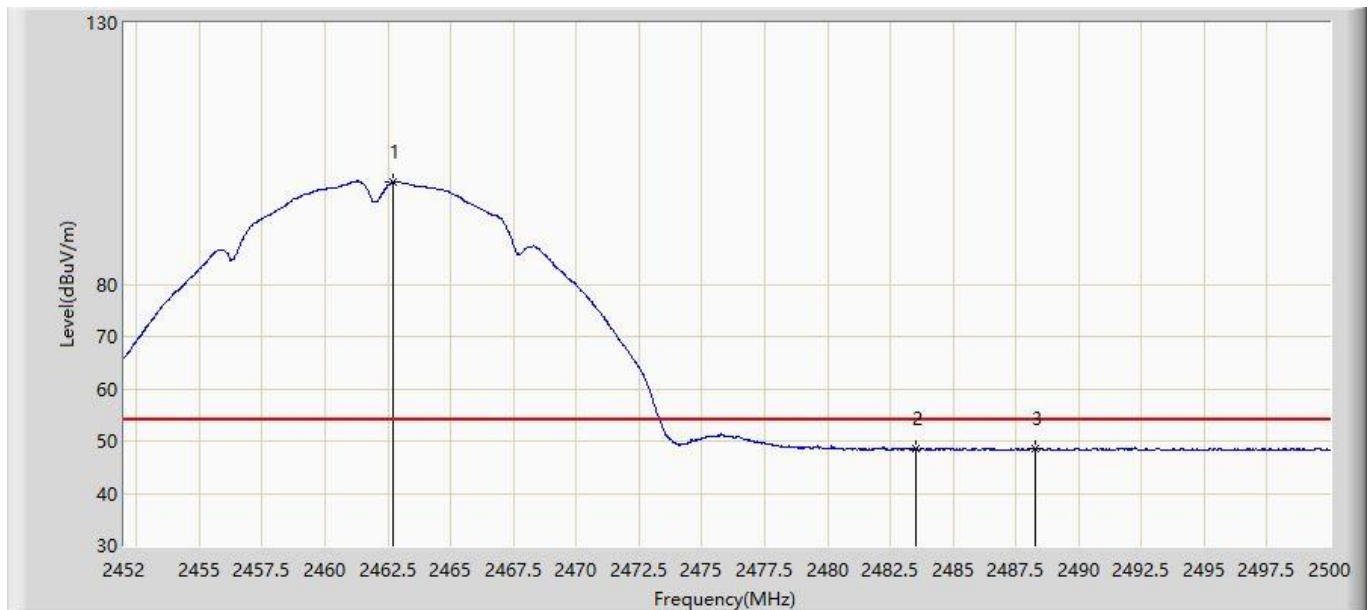


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2462.728	99.552	66.943	N/A	N/A	32.608	AV
2			2483.500	48.493	15.789	-5.507	54.000	32.704	AV
3			2488.264	48.605	15.879	-5.395	54.000	32.726	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2020/03/19 - 10:41
Limit: NCC LP0002_1GHz-40GHz	Engineer: Fran Chen
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11g at Channel 2412MHz with OAW-AP1362 (CDD Mode)	

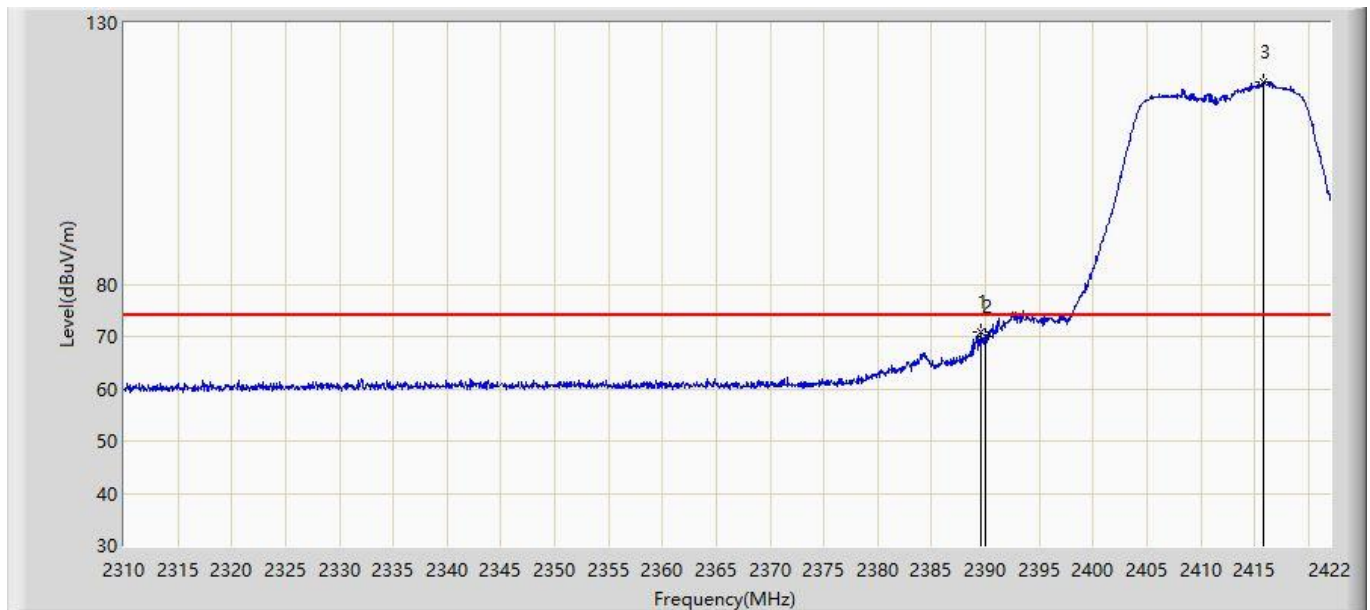


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2389.520	70.929	38.657	-3.071	74.000	32.273	PK
2			2390.000	69.954	37.680	-4.046	74.000	32.274	PK
3		*	2415.840	118.749	86.357	N/A	N/A	32.393	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2020/03/19 - 10:48
Limit: NCC LP0002_1GHz-40GHz	Engineer: Fran Chen
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11g at Channel 2412MHz with OAW-AP1362 (CDD Mode)	

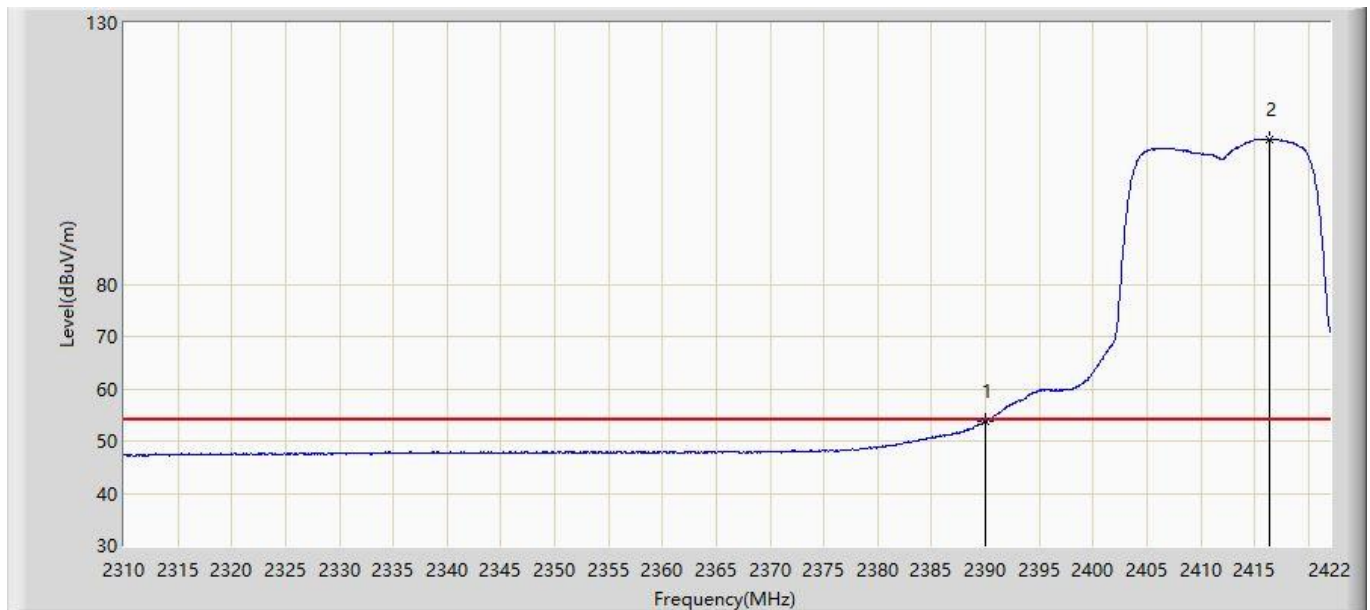


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	53.890	21.616	-0.110	54.000	32.274	AV
2		*	2416.400	107.819	75.424	N/A	N/A	32.394	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2020/03/19 - 10:49
Limit: NCC LP0002_1GHz-40GHz	Engineer: Fran Chen
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11g at Channel 2412MHz with OAW-AP1362 (CDD Mode)	

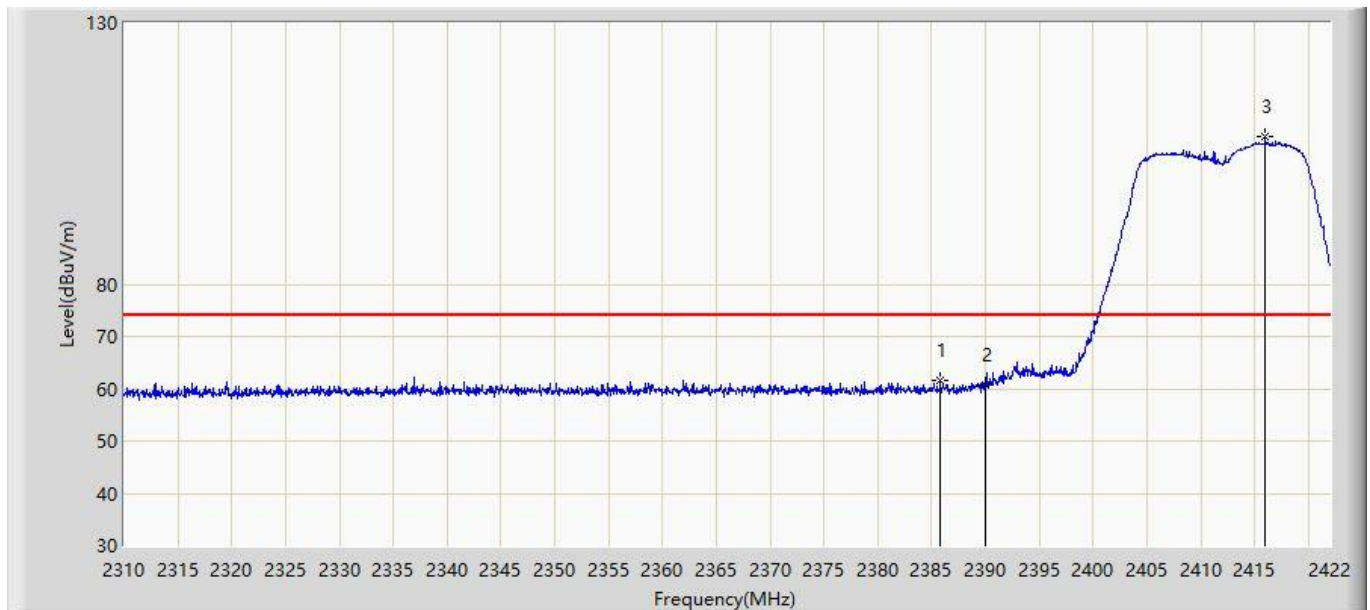


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2385.824	61.711	29.456	-12.289	74.000	32.255	PK
2			2390.000	60.597	28.323	-13.403	74.000	32.274	PK
3		*	2415.952	108.125	75.732	N/A	N/A	32.393	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2020/03/19 - 10:50
Limit: NCC LP0002_1GHz-40GHz	Engineer: Fran Chen
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11g at Channel 2412MHz with OAW-AP1362 (CDD Mode)	

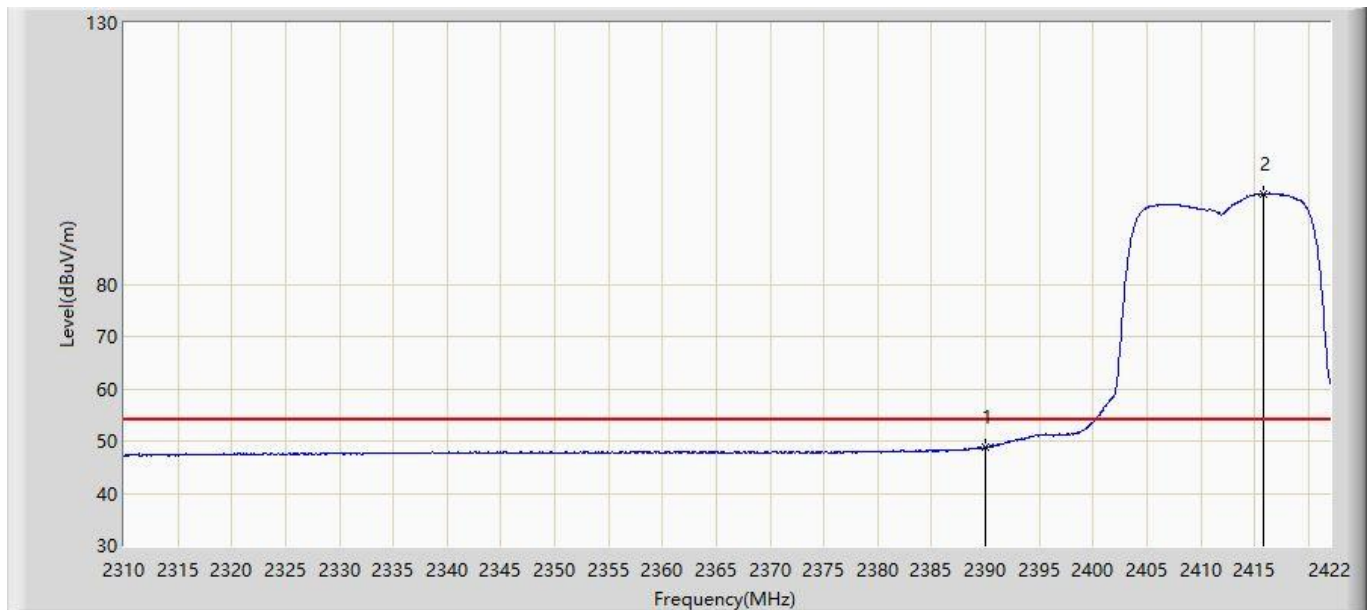


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	48.733	16.459	-5.267	54.000	32.274	AV
2		*	2415.784	97.267	64.875	N/A	N/A	32.392	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2020/03/19 - 10:53
Limit: NCC LP0002_1GHz-40GHz	Engineer: Fran Chen
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11g at Channel 2462MHz with OAW-AP1362 (CDD Mode)	

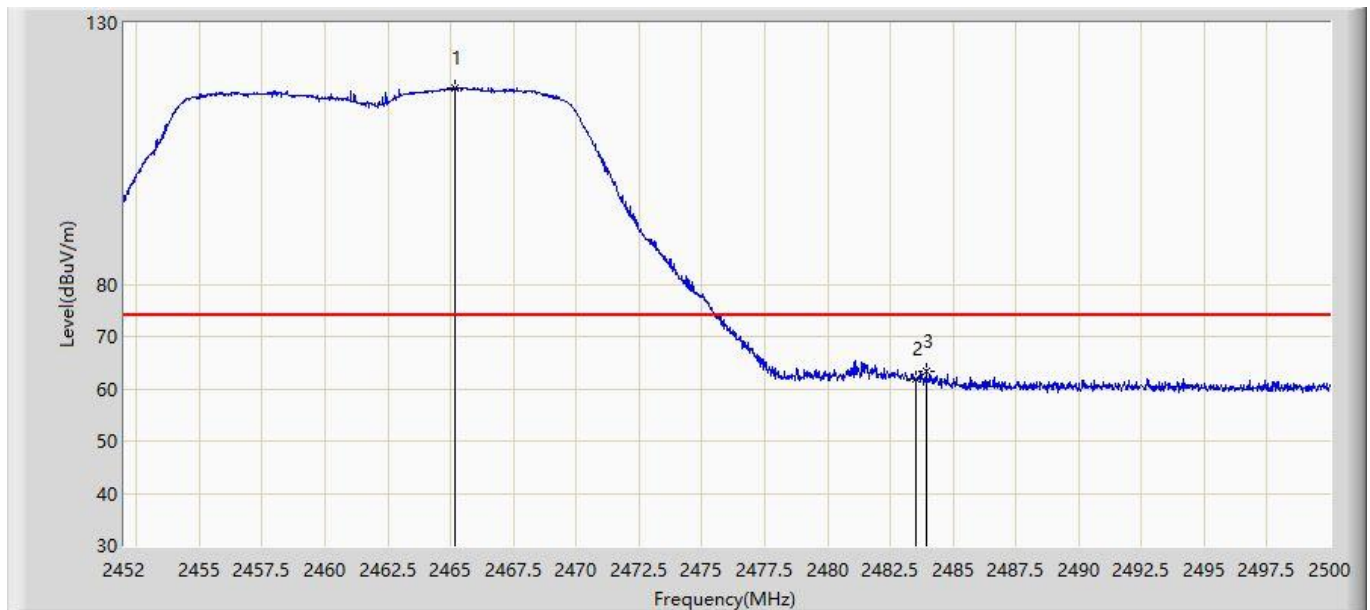


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2465.176	117.478	84.858	N/A	N/A	32.620	PK
2			2483.500	61.776	29.072	-12.224	74.000	32.704	PK
3			2483.944	63.478	30.772	-10.522	74.000	32.707	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2020/03/19 - 10:55
Limit: NCC LP0002_1GHz-40GHz	Engineer: Fran Chen
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11g at Channel 2462MHz with OAW-AP1362 (CDD Mode)	

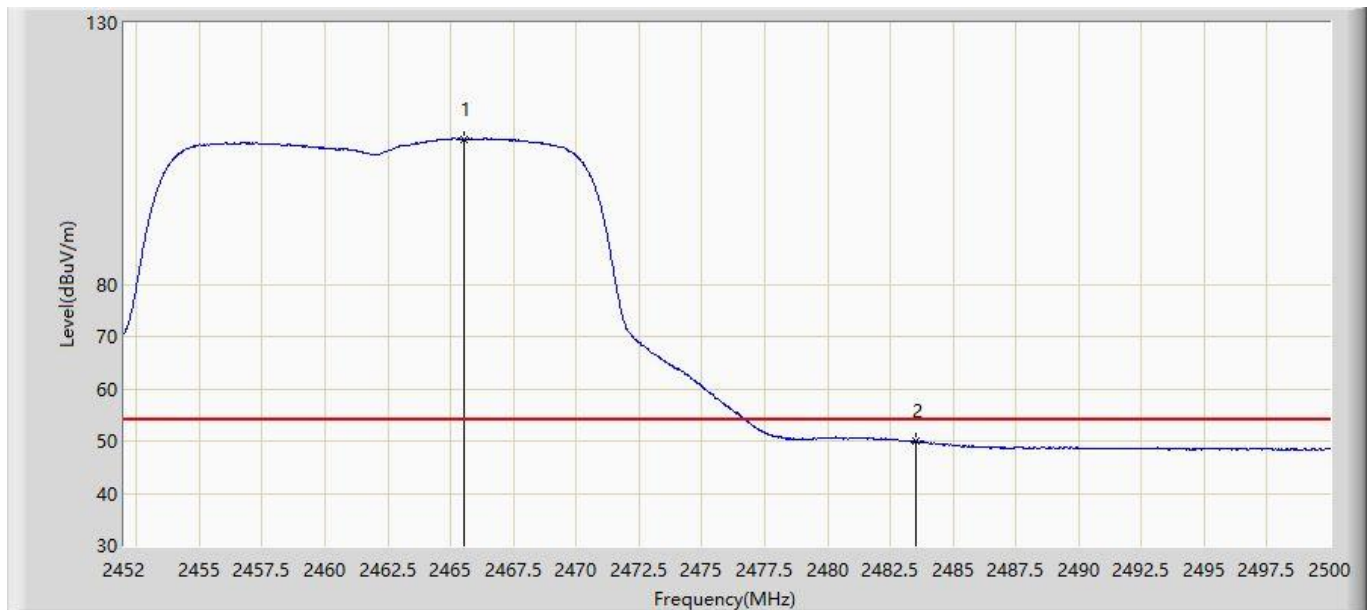


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2465.560	107.801	75.179	N/A	N/A	32.621	AV
2			2483.500	49.878	17.174	-4.122	54.000	32.704	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2020/03/19 - 10:57
Limit: NCC LP0002_1GHz-40GHz	Engineer: Fran Chen
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11g at Channel 2462MHz with OAW-AP1362 (CDD Mode)	

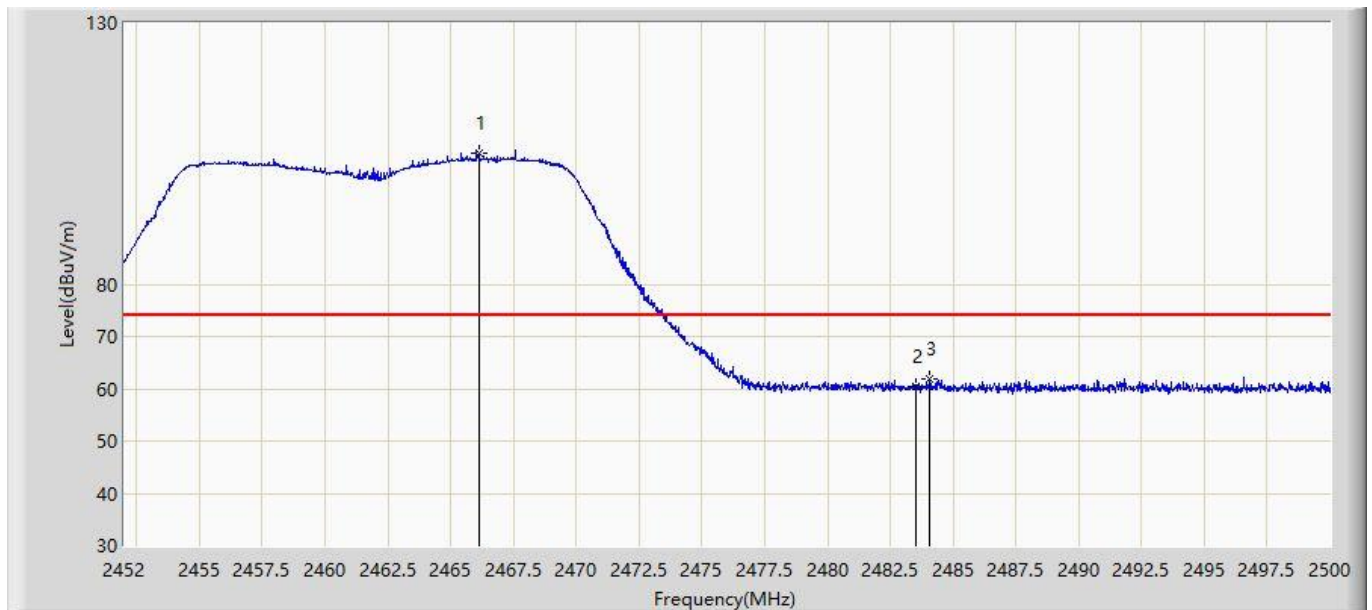


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2466.112	105.191	72.567	N/A	N/A	32.624	PK
2			2483.500	60.358	27.654	-13.642	74.000	32.704	PK
3			2484.064	61.909	29.202	-12.091	74.000	32.707	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2020/03/19 - 10:58
Limit: NCC LP0002_1GHz-40GHz	Engineer: Fran Chen
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11g at Channel 2462MHz with OAW-AP1362 (CDD Mode)	

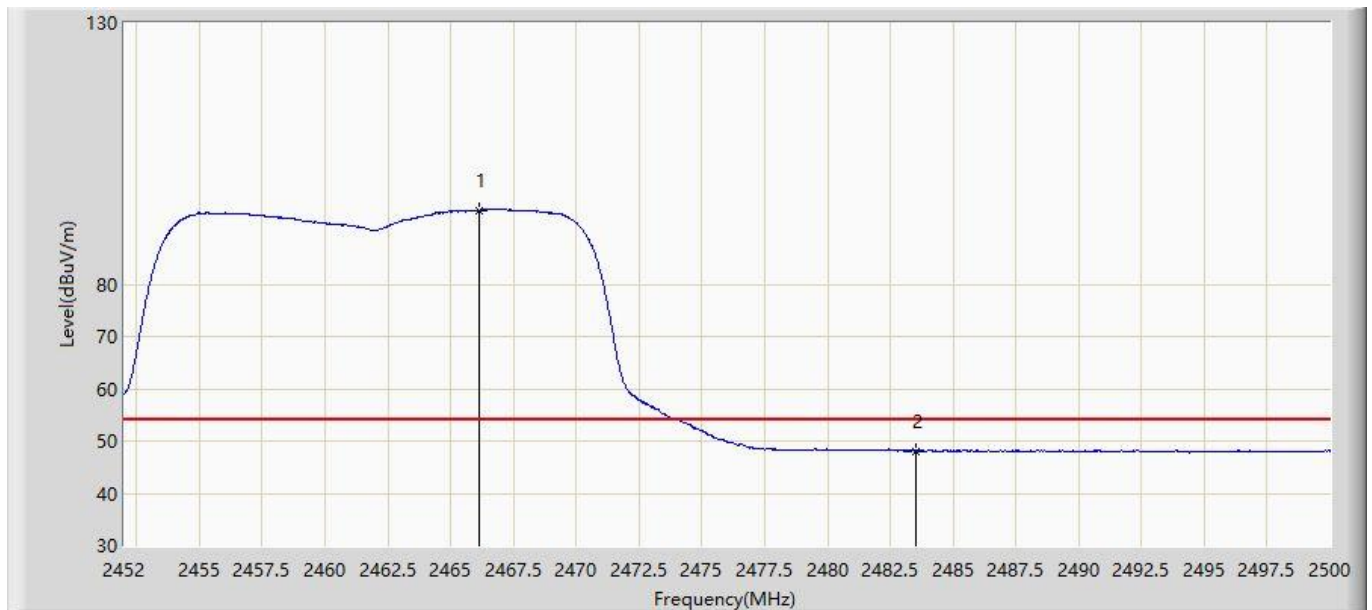


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2466.112	94.156	61.532	N/A	N/A	32.624	AV
2			2483.500	48.051	15.347	-5.949	54.000	32.704	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2020/03/19 - 11:30
Limit: NCC LP0002_1GHz-40GHz	Engineer: Fran Chen
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT20 at Channel 2412MHz with OAW-AP1362 (CDD Mode)	

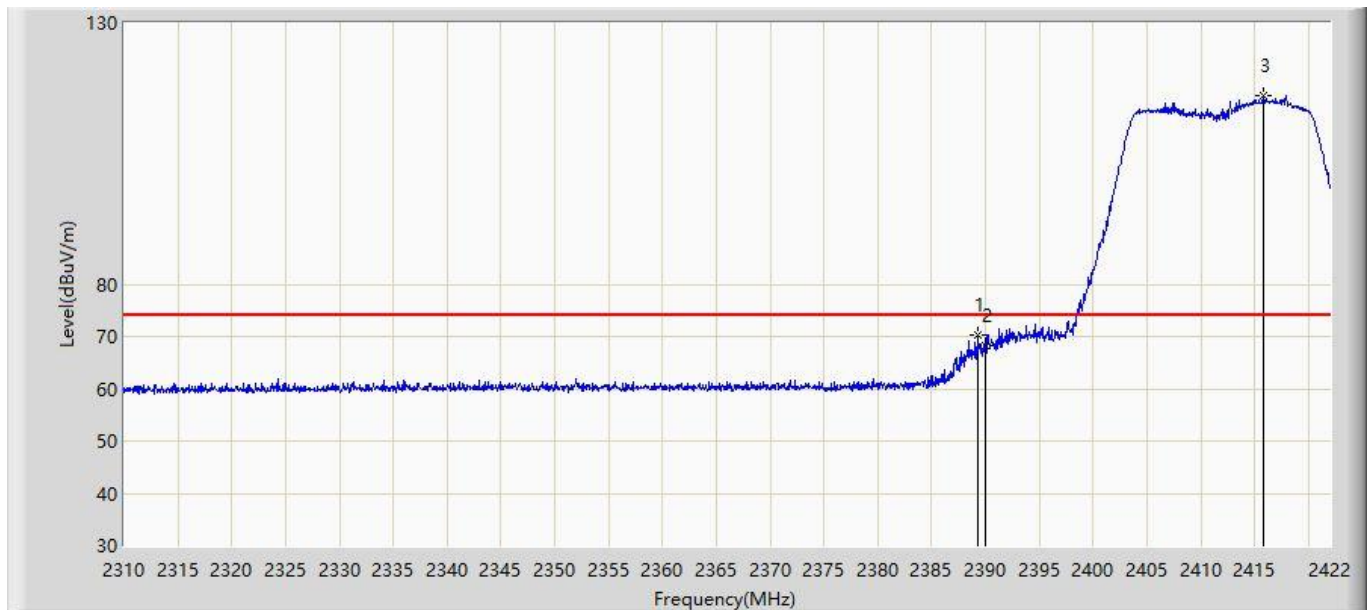


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2389.240	70.422	38.151	-3.578	74.000	32.271	PK
2			2390.000	68.330	36.056	-5.670	74.000	32.274	PK
3		*	2415.840	116.142	83.750	N/A	N/A	32.393	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2020/03/19 - 11:33
Limit: NCC LP0002_1GHz-40GHz	Engineer: Fran Chen
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT20 at Channel 2412MHz with OAW-AP1362 (CDD Mode)	

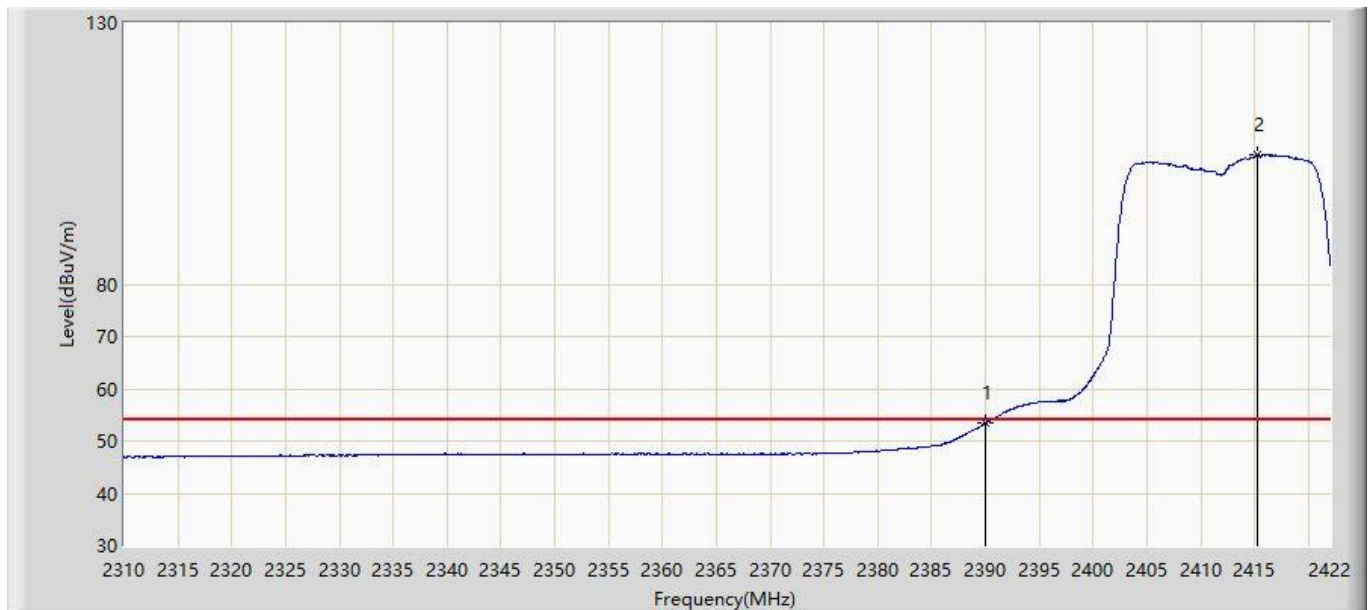


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	53.367	21.093	-0.633	54.000	32.274	AV
2		*	2415.224	104.689	72.300	N/A	N/A	32.389	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2020/03/19 - 11:34
Limit: NCC LP0002_1GHz-40GHz	Engineer: Fran Chen
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT20 at Channel 2412MHz with OAW-AP1362 (CDD Mode)	

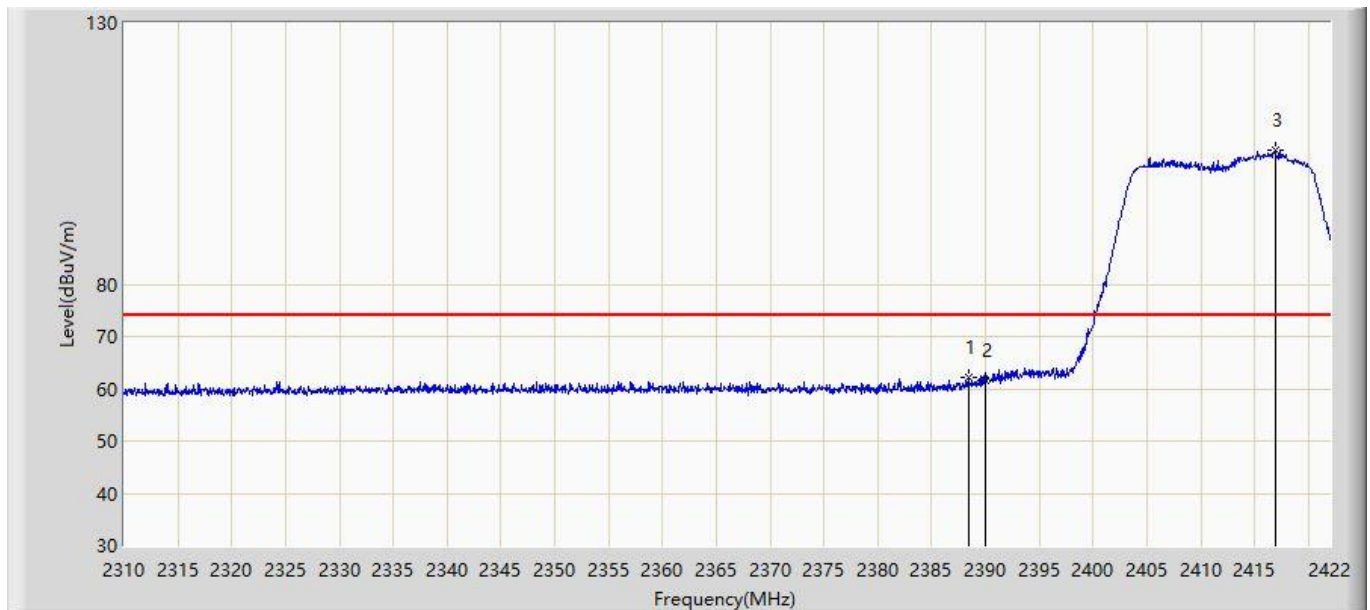


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2388.400	62.107	29.840	-11.893	74.000	32.267	PK
2			2390.000	61.607	29.333	-12.393	74.000	32.274	PK
3		*	2416.904	105.548	73.151	N/A	N/A	32.397	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2020/03/19 - 11:36
Limit: NCC LP0002_1GHz-40GHz	Engineer: Fran Chen
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT20 at Channel 2412MHz with OAW-AP1362 (CDD Mode)	

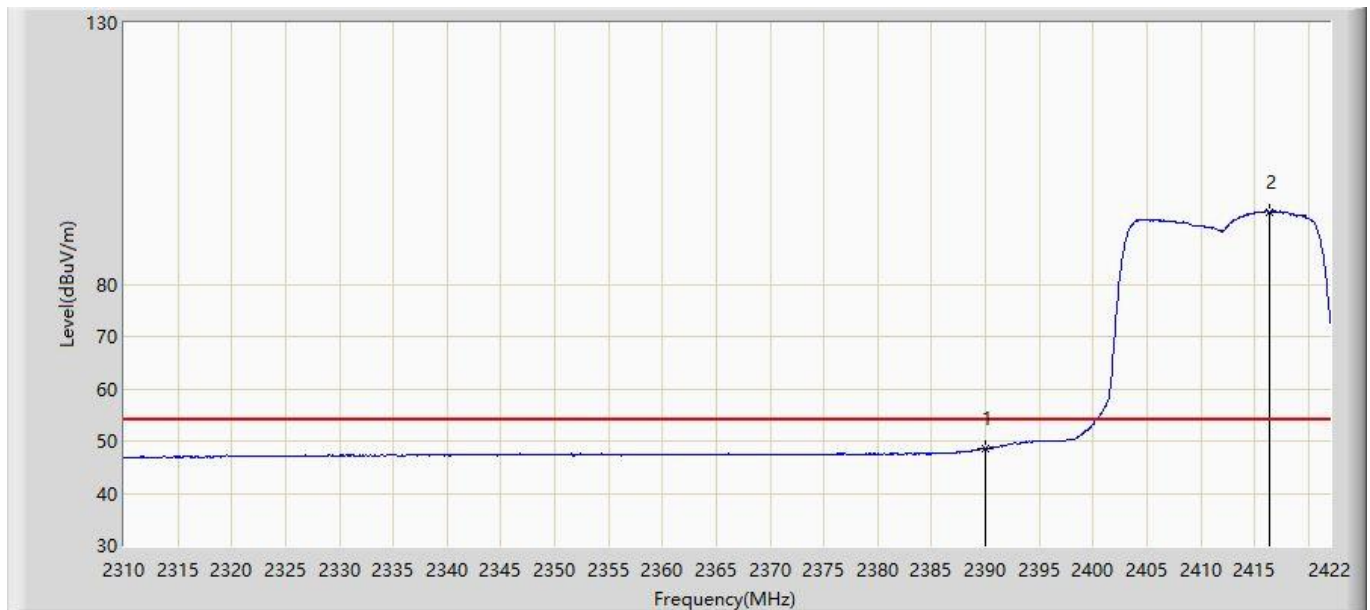


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	48.530	16.256	-5.470	54.000	32.274	AV
2		*	2416.344	93.823	61.428	N/A	N/A	32.394	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2020/03/19 - 11:37
Limit: NCC LP0002_1GHz-40GHz	Engineer: Fran Chen
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT20 at Channel 2462MHz with OAW-AP1362 (CDD Mode)	

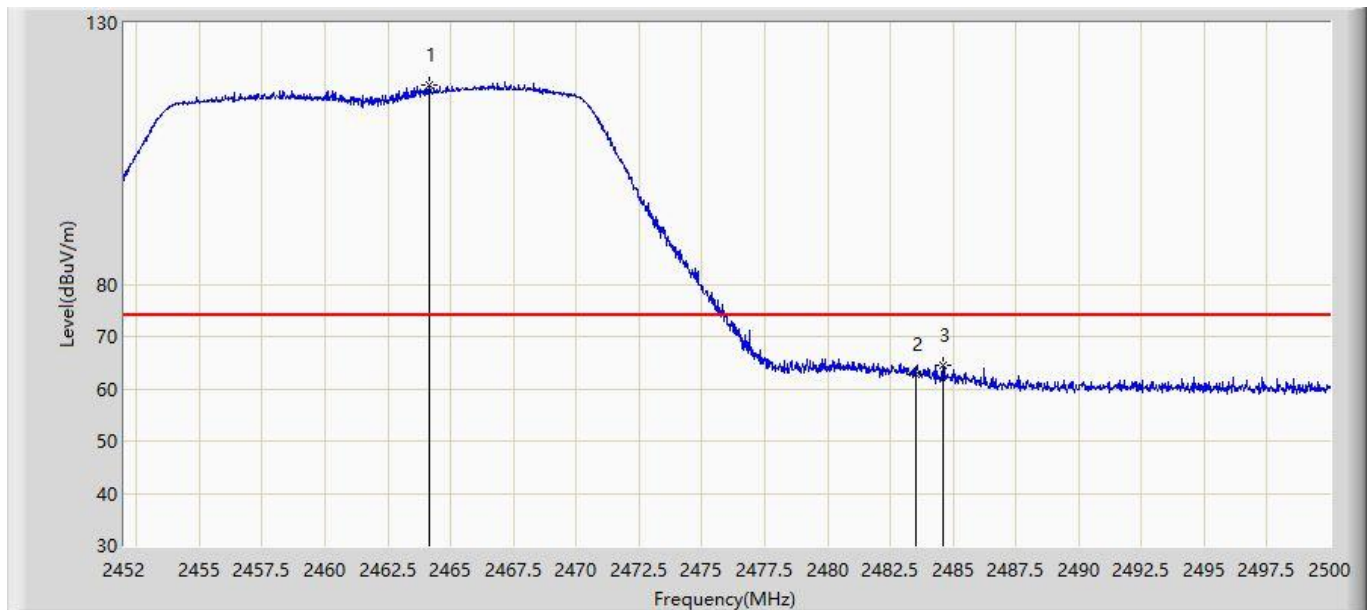


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2464.144	118.173	85.558	N/A	N/A	32.615	PK
2			2483.500	62.855	30.151	-11.145	74.000	32.704	PK
3			2484.616	64.572	31.862	-9.428	74.000	32.710	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2020/03/19 - 11:41
Limit: NCC LP0002_1GHz-40GHz	Engineer: Fran Chen
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT20 at Channel 2462MHz with OAW-AP1362 (CDD Mode)	

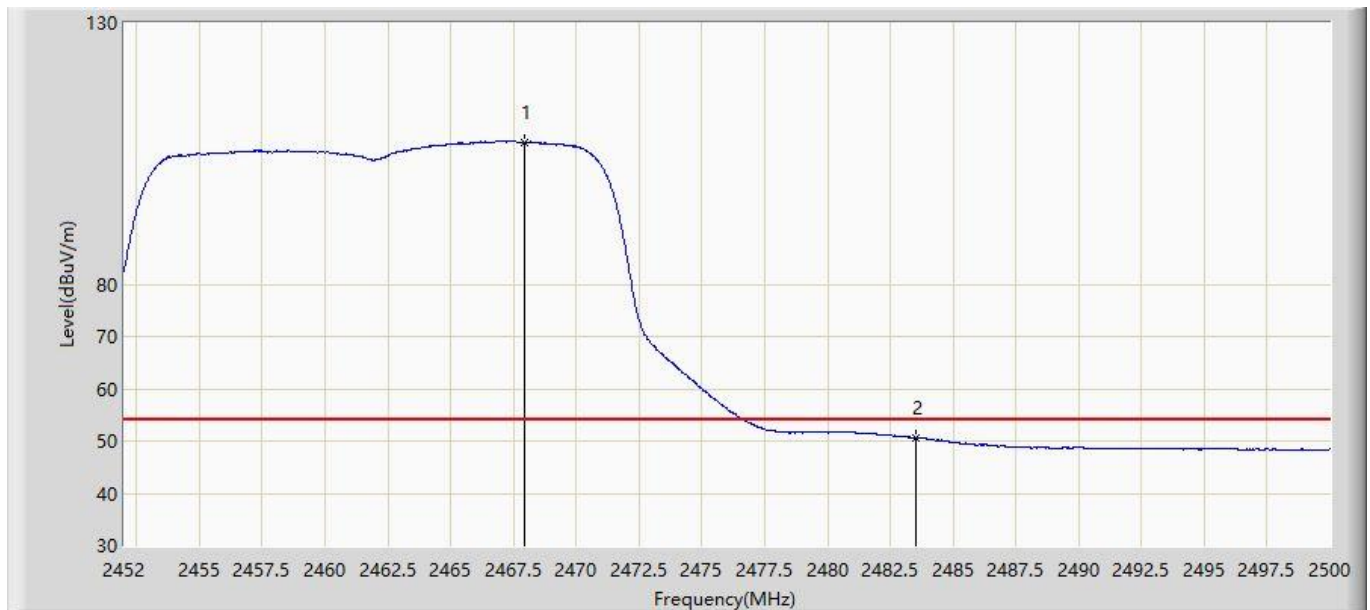


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2467.960	107.233	74.600	N/A	N/A	32.632	AV
2			2483.500	50.529	17.825	-3.471	54.000	32.704	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2020/03/19 - 11:44
Limit: NCC LP0002_1GHz-40GHz	Engineer: Fran Chen
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT20 at Channel 2462MHz with OAW-AP1362 (CDD Mode)	

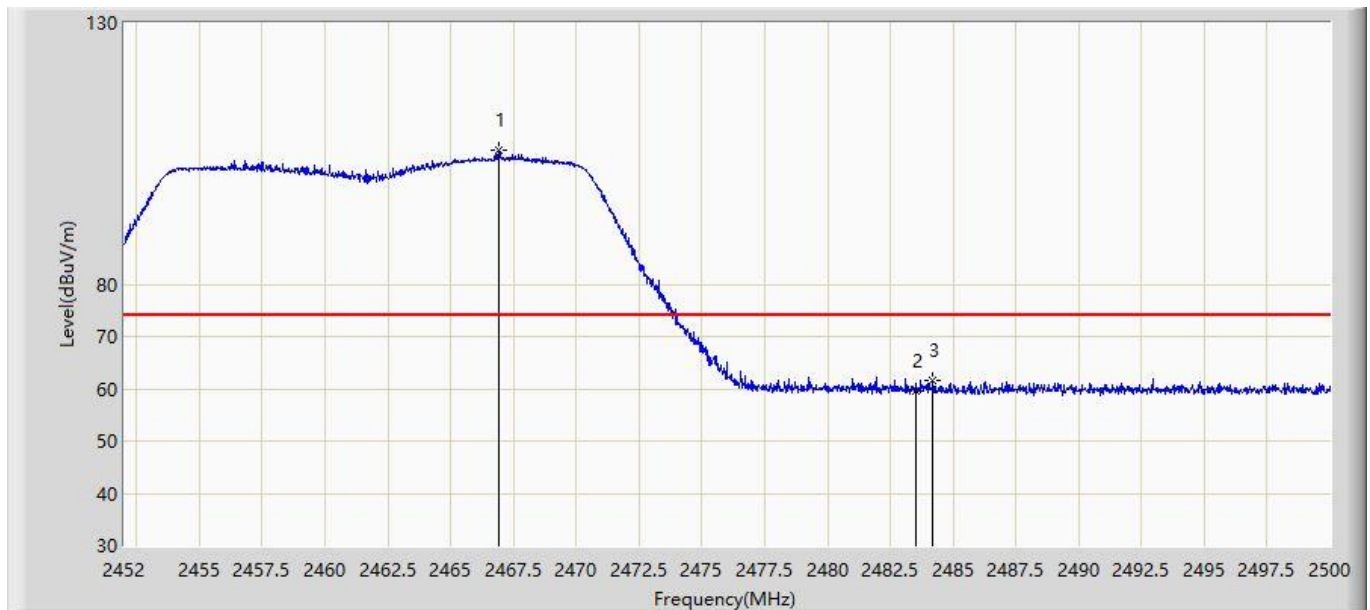


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2466.904	105.609	72.981	N/A	N/A	32.628	PK
2			2483.500	59.657	26.953	-14.343	74.000	32.704	PK
3			2484.208	61.644	28.936	-12.356	74.000	32.707	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2020/03/19 - 11:46
Limit: NCC LP0002_1GHz-40GHz	Engineer: Fran Chen
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT20 at Channel 2462MHz with OAW-AP1362 (CDD Mode)	

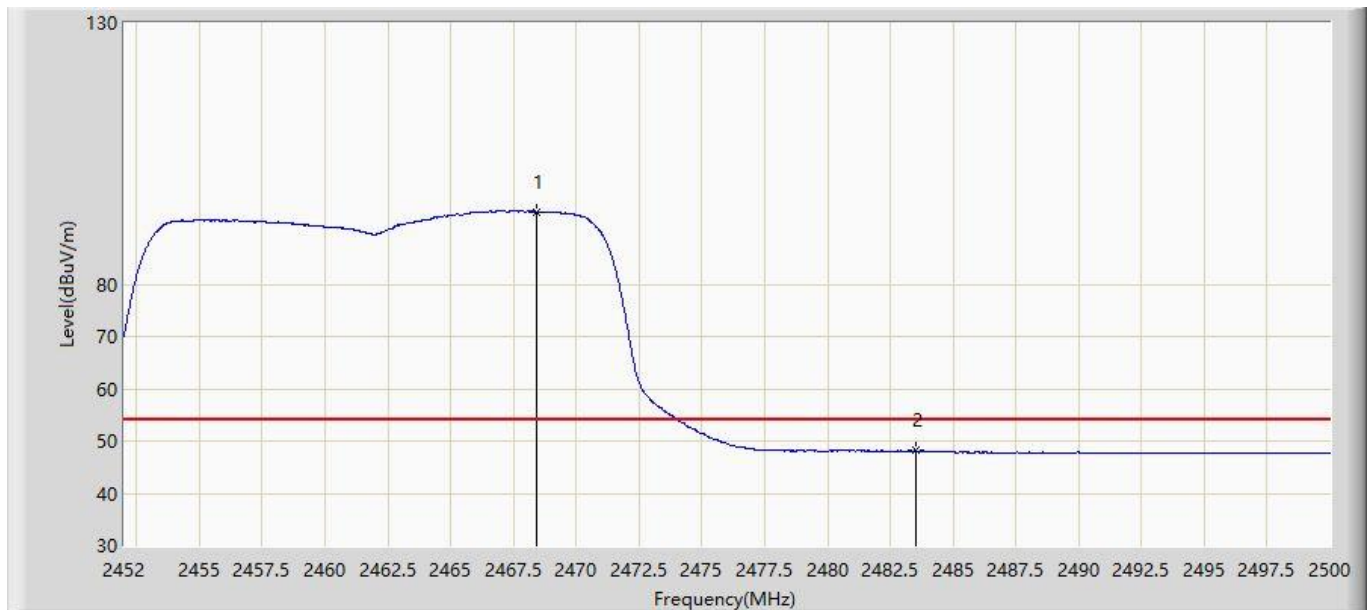


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2468.392	93.865	61.230	N/A	N/A	32.635	AV
2			2483.500	48.145	15.441	-5.855	54.000	32.704	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2020/03/19 - 11:48
Limit: NCC LP0002_1GHz-40GHz	Engineer: Fran Chen
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT40 at Channel 2422MHz with OAW-AP1362 (CDD Mode)	

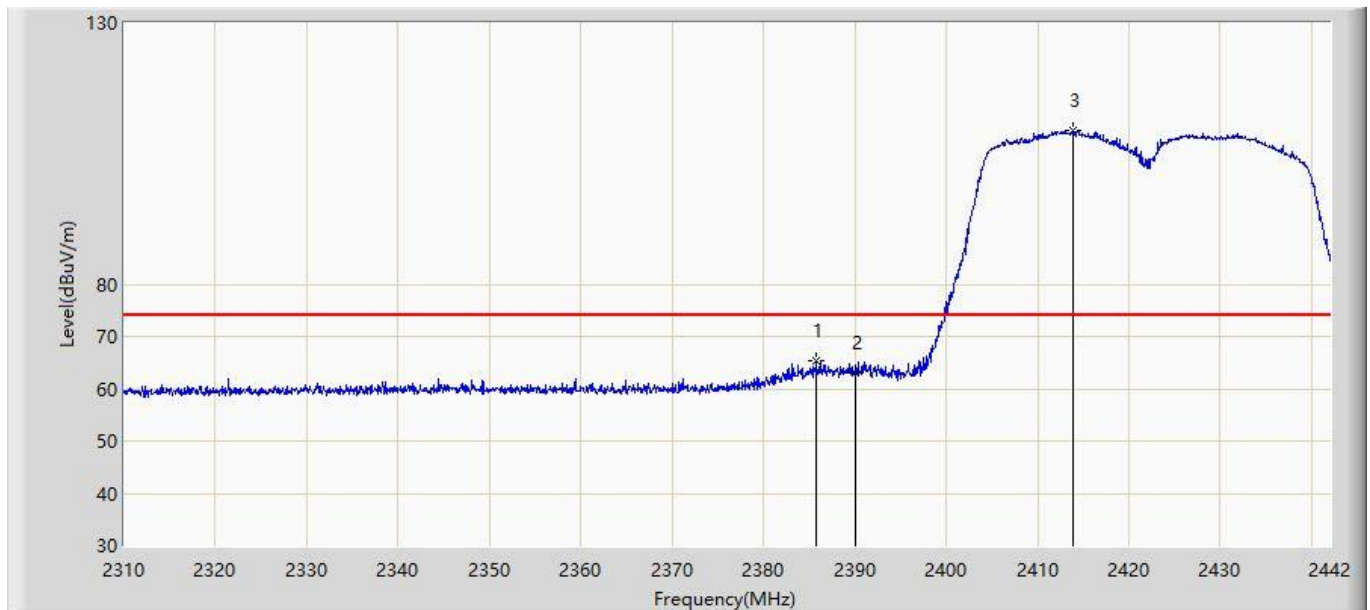


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2385.768	65.500	33.245	-8.500	74.000	32.255	PK
2			2390.000	62.931	30.657	-11.069	74.000	32.274	PK
3		*	2413.884	109.304	76.921	N/A	N/A	32.383	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2020/03/19 - 11:49
Limit: NCC LP0002_1GHz-40GHz	Engineer: Fran Chen
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT40 at Channel 2422MHz with OAW-AP1362 (CDD Mode)	

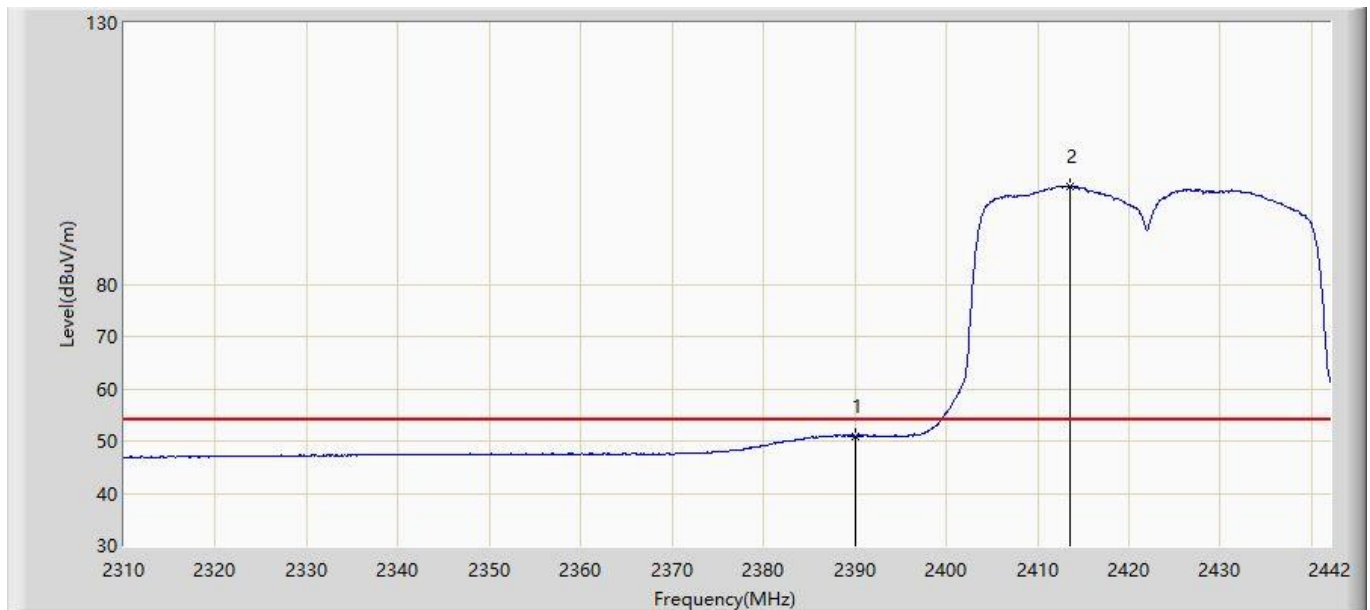


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	50.945	18.671	-3.055	54.000	32.274	AV
2		*	2413.554	98.798	66.416	N/A	N/A	32.382	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2020/03/19 - 11:50
Limit: NCC LP0002_1GHz-40GHz	Engineer: Fran Chen
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT40 at Channel 2422MHz with OAW-AP1362 (CDD Mode)	

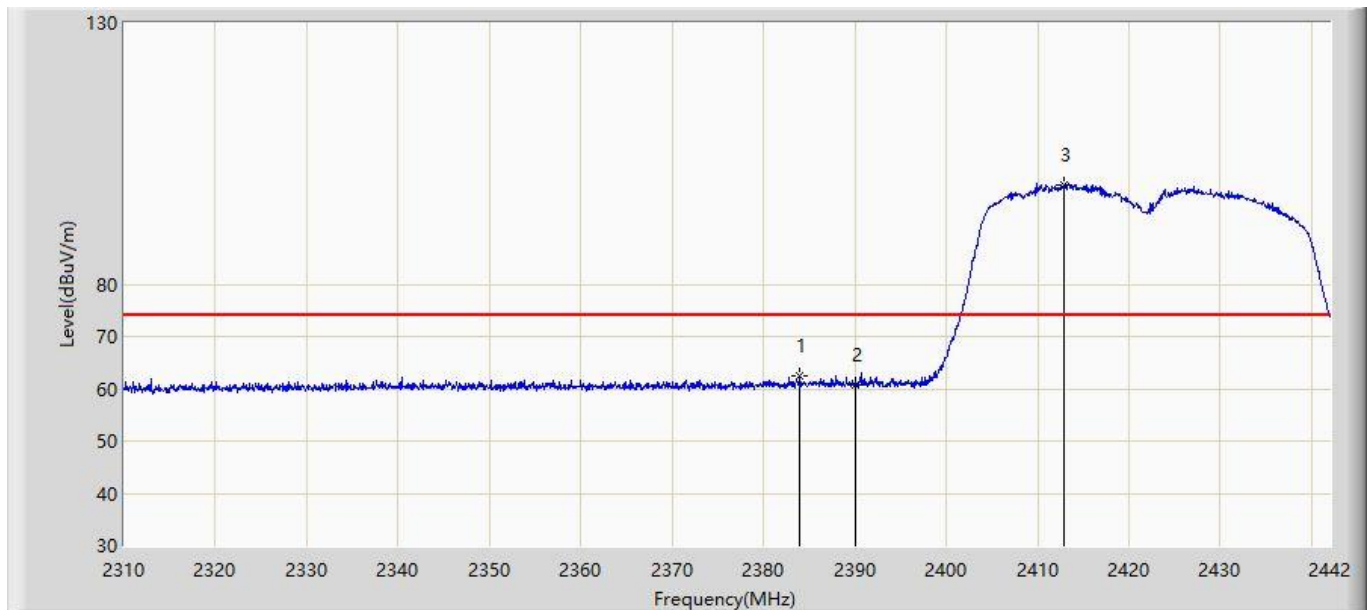


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2383.986	62.585	30.338	-11.415	74.000	32.247	PK
2			2390.000	60.718	28.444	-13.282	74.000	32.274	PK
3		*	2412.894	99.119	66.740	N/A	N/A	32.378	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2020/03/19 - 11:55
Limit: NCC LP0002_1GHz-40GHz	Engineer: Fran Chen
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT40 at Channel 2422MHz with OAW-AP1362 (CDD Mode)	

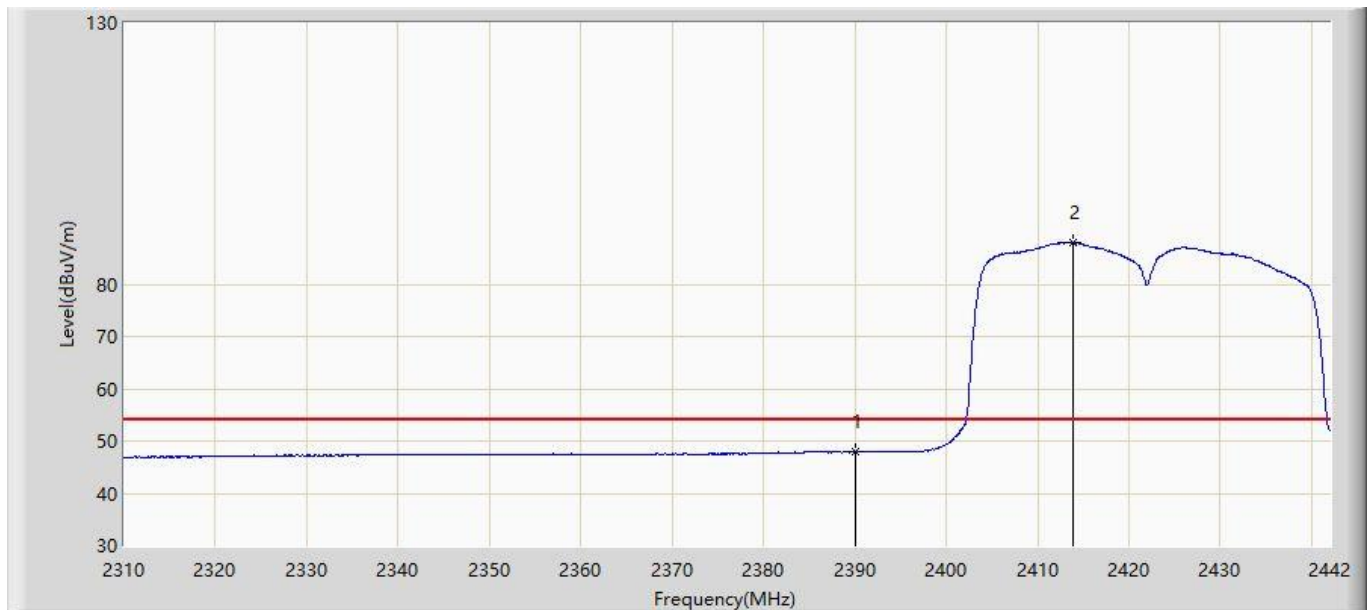


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	47.911	15.637	-6.089	54.000	32.274	AV
2		*	2413.818	87.933	55.550	N/A	N/A	32.383	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2020/03/19 - 13:13
Limit: NCC LP0002_1GHz-40GHz	Engineer: Fran Chen
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT40 at Channel 2452MHz with OAW-AP1362 (CDD Mode)	

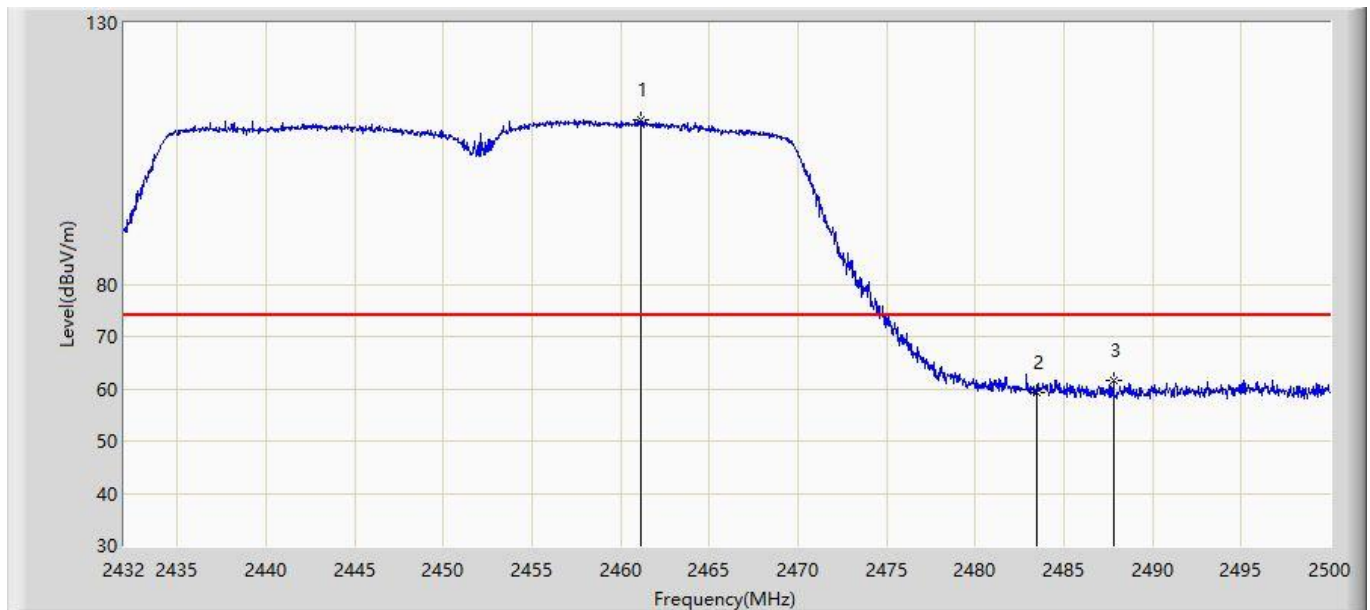


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2461.172	111.524	78.922	N/A	N/A	32.601	PK
2			2483.500	59.354	26.650	-14.646	74.000	32.704	PK
3			2487.794	61.627	28.903	-12.373	74.000	32.723	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2020/03/19 - 13:14
Limit: NCC LP0002_1GHz-40GHz	Engineer: Fran Chen
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT40 at Channel 2452MHz with OAW-AP1362 (CDD Mode)	

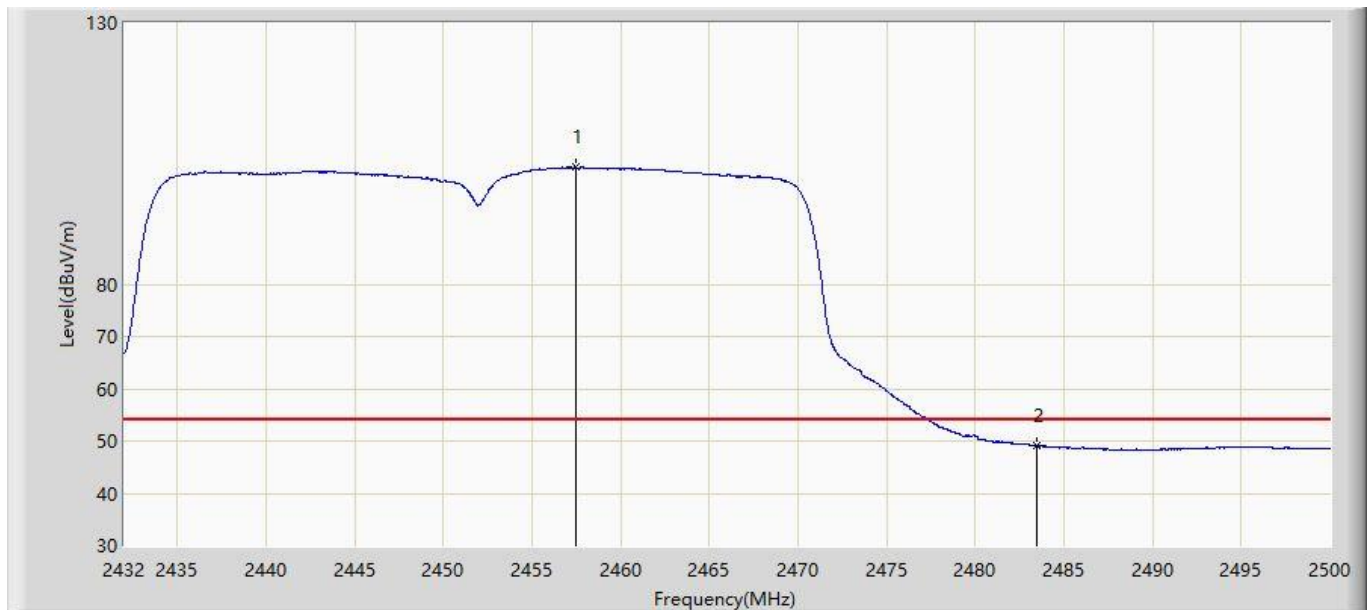


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2457.466	102.349	69.764	N/A	N/A	32.585	AV
2			2483.500	49.079	16.375	-4.921	54.000	32.704	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2020/03/19 - 13:17
Limit: NCC LP0002_1GHz-40GHz	Engineer: Fran Chen
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT40 at Channel 2452MHz with OAW-AP1362 (CDD Mode)	

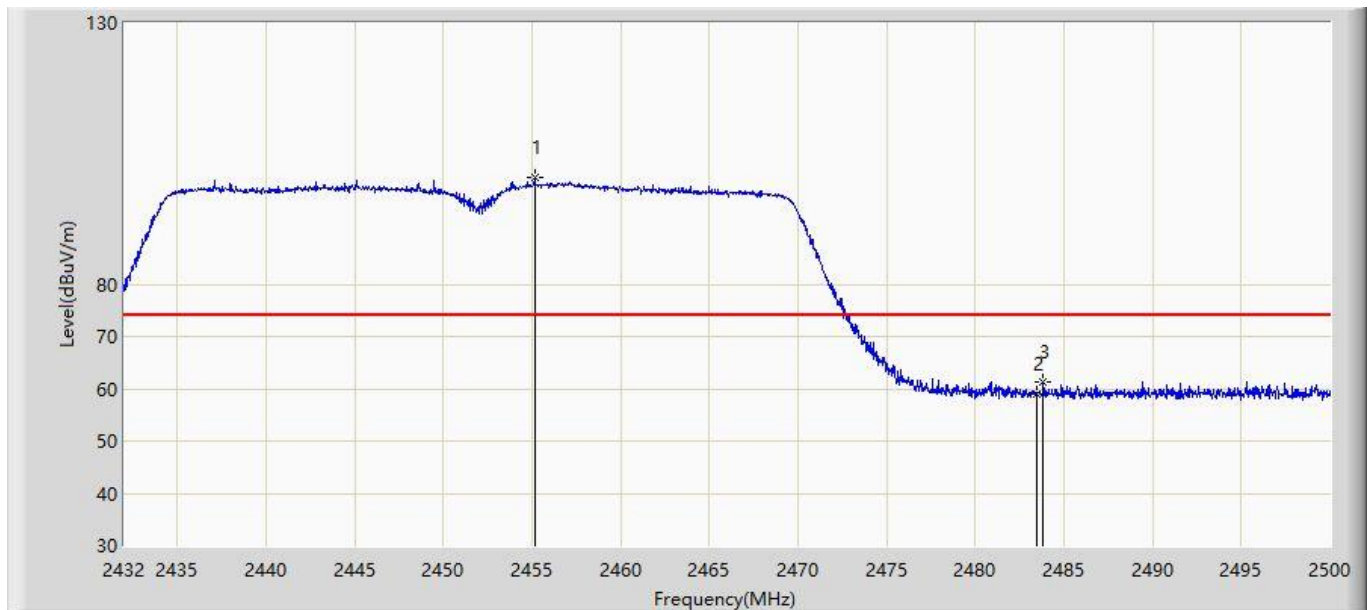


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2455.154	100.405	67.831	N/A	N/A	32.574	PK
2			2483.500	59.063	26.359	-14.937	74.000	32.704	PK
3			2483.850	61.353	28.647	-12.647	74.000	32.706	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2020/03/19 - 13:18
Limit: NCC LP0002_1GHz-40GHz	Engineer: Fran Chen
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT40 at Channel 2452MHz with OAW-AP1362 (CDD Mode)	

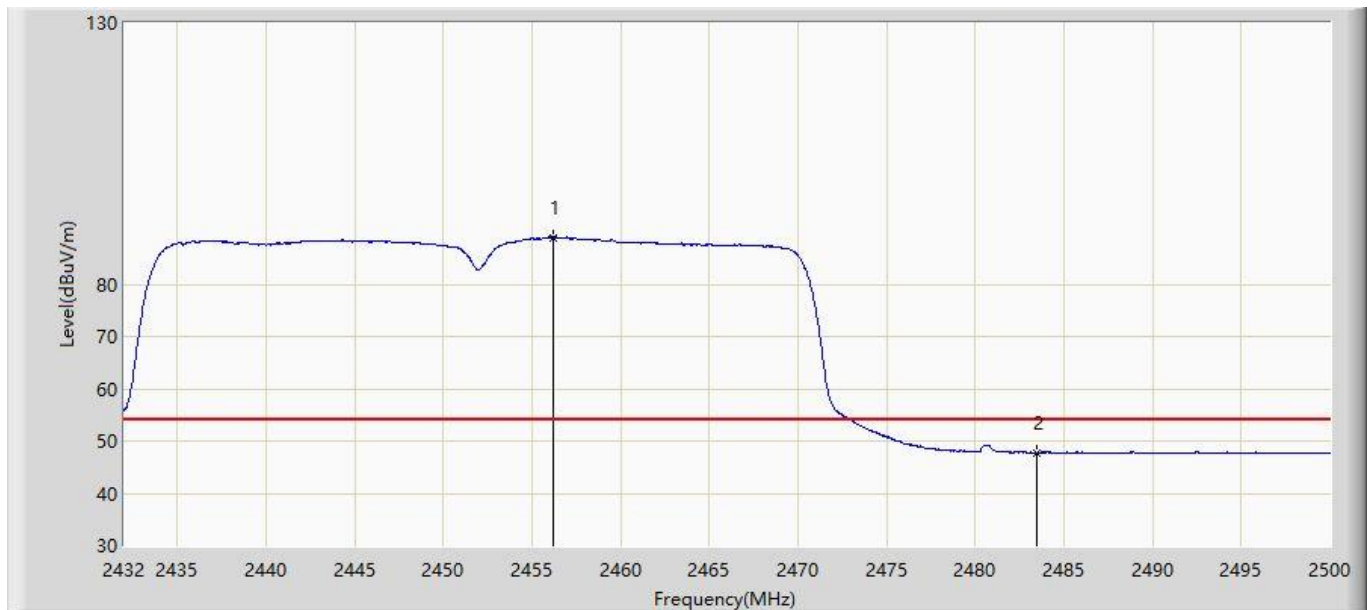


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2456.174	88.879	56.300	N/A	N/A	32.579	AV
2			2483.500	47.788	15.084	-6.212	54.000	32.704	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2020/03/19 - 13:23
Limit: NCC LP0002_1GHz-40GHz	Engineer: Fran Chen
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE20 at Channel 2412MHz with OAW-AP1362 (CDD Mode)	

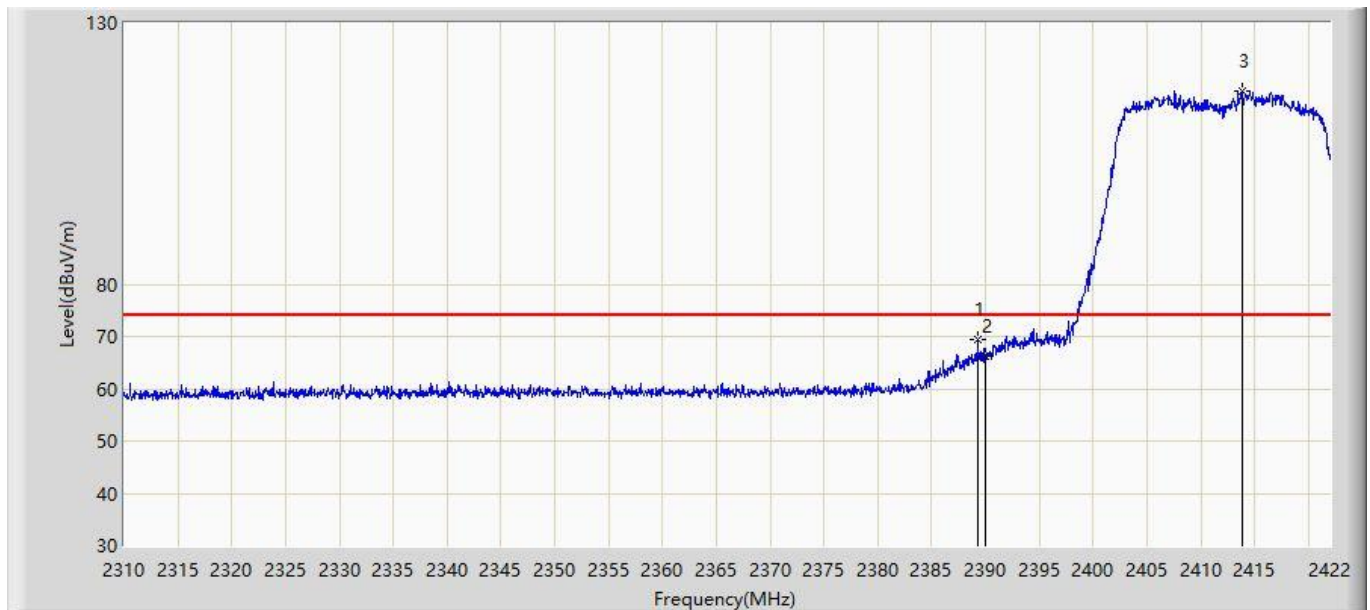


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2389.296	69.365	37.094	-4.635	74.000	32.271	PK
2			2390.000	66.088	33.814	-7.912	74.000	32.274	PK
3		*	2413.824	116.926	84.543	N/A	N/A	32.383	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2020/03/19 - 13:23
Limit: NCC LP0002_1GHz-40GHz	Engineer: Fran Chen
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE20 at Channel 2412MHz with OAW-AP1362 (CDD Mode)	

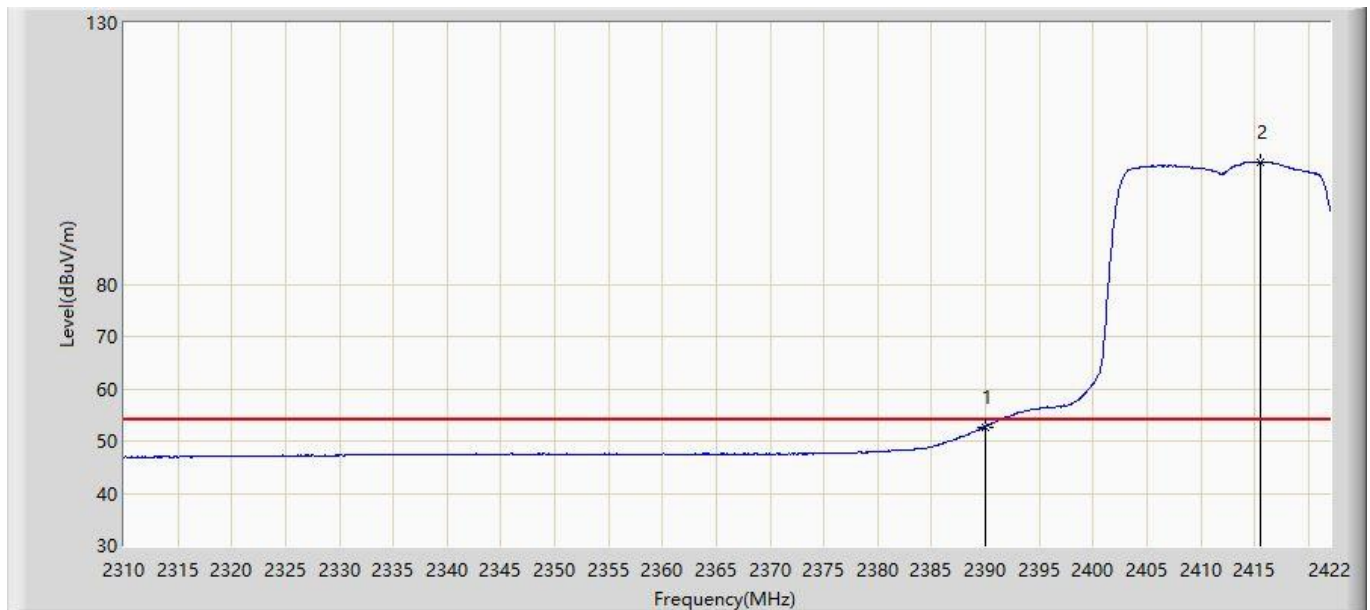


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	52.746	20.472	-1.254	54.000	32.274	AV
2		*	2415.560	103.456	71.065	N/A	N/A	32.391	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2020/03/19 - 13:23
Limit: NCC LP0002_1GHz-40GHz	Engineer: Fran Chen
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE20 at Channel 2412MHz with OAW-AP1362 (CDD Mode)	

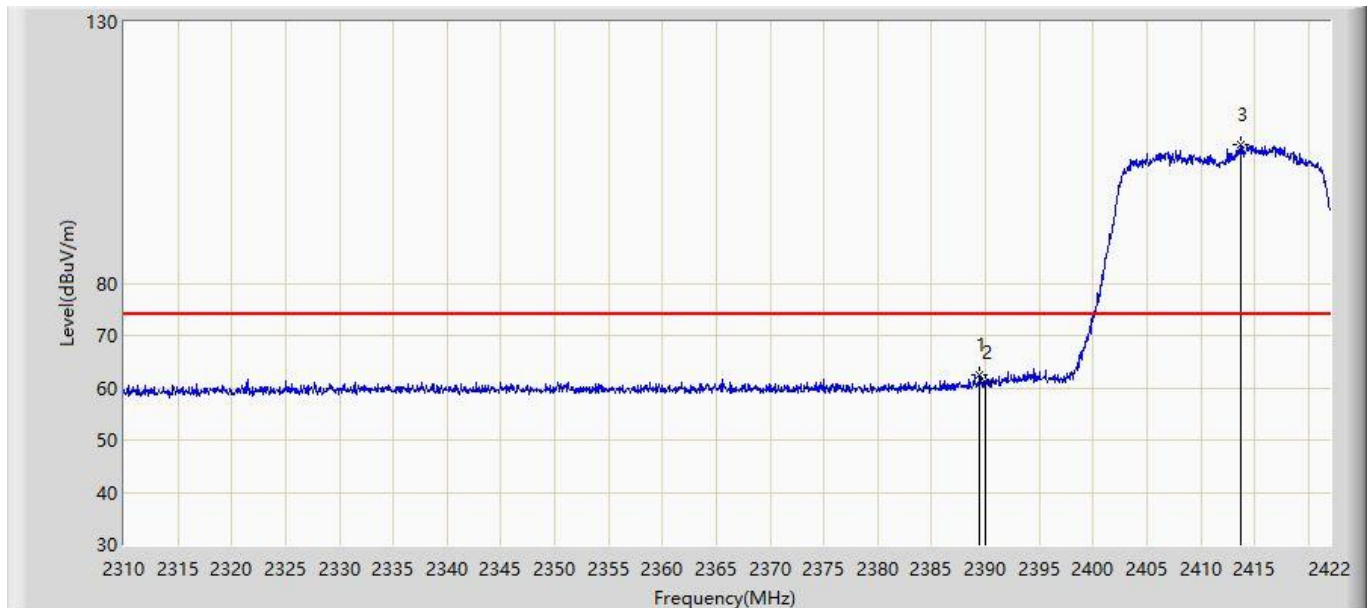


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2389.464	62.395	30.123	-11.605	74.000	32.272	PK
2			2390.000	61.121	28.847	-12.879	74.000	32.274	PK
3		*	2413.656	106.554	74.172	N/A	N/A	32.382	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2020/03/19 - 13:25
Limit: NCC LP0002_1GHz-40GHz	Engineer: Fran Chen
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE20 at Channel 2412MHz with OAW-AP1362 (CDD Mode)	

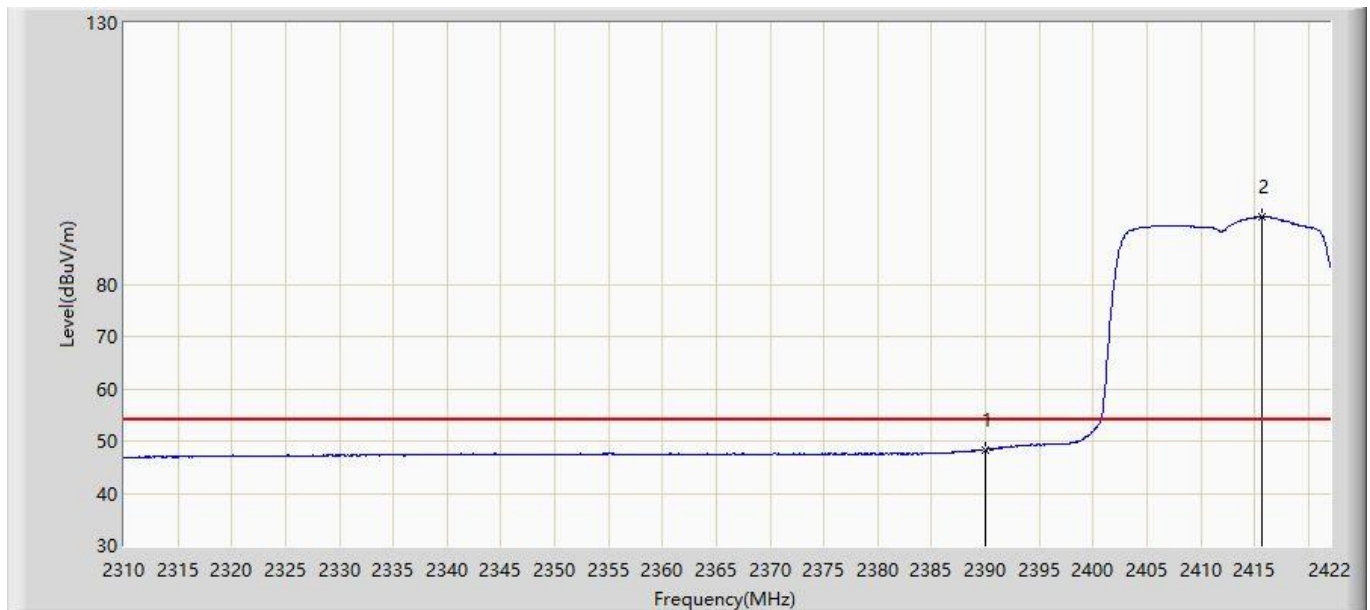


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	48.388	16.114	-5.612	54.000	32.274	AV
2		*	2415.616	92.894	60.503	N/A	N/A	32.391	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2020/03/19 - 13:26
Limit: NCC LP0002_1GHz-40GHz	Engineer: Fran Chen
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE20 at Channel 2462MHz with OAW-AP1362 (CDD Mode)	

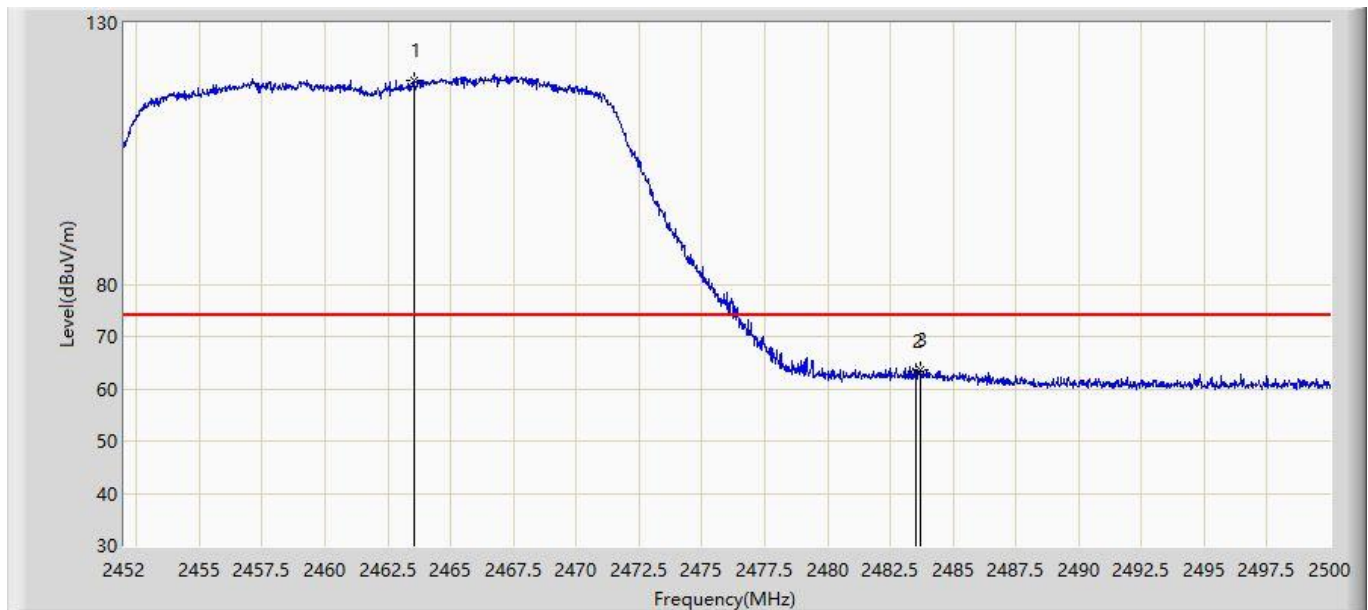


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2463.568	118.993	86.380	N/A	N/A	32.612	PK
2			2483.500	63.232	30.528	-10.768	74.000	32.704	PK
3			2483.680	63.619	30.914	-10.381	74.000	32.706	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2020/03/19 - 13:28
Limit: NCC LP0002_1GHz-40GHz	Engineer: Fran Chen
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE20 at Channel 2462MHz with OAW-AP1362 (CDD Mode)	

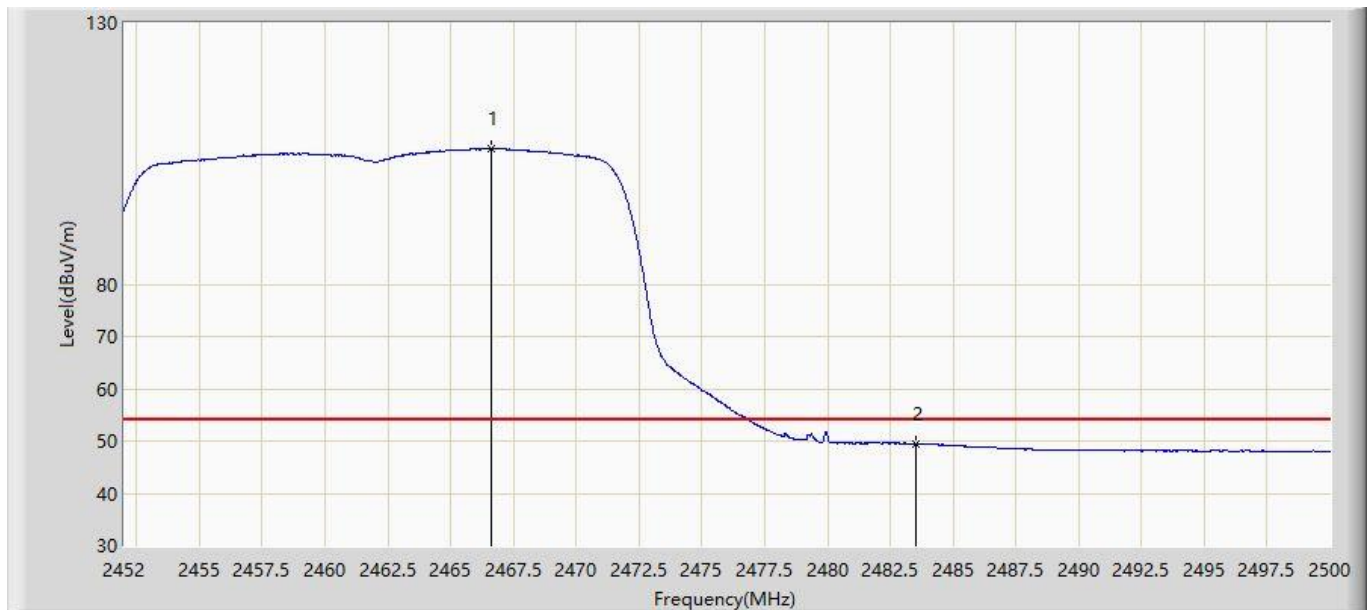


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2466.616	105.950	73.324	N/A	N/A	32.627	AV
2			2483.500	49.429	16.725	-4.571	54.000	32.704	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2020/03/19 - 13:29
Limit: NCC LP0002_1GHz-40GHz	Engineer: Fran Chen
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE20 at Channel 2462MHz with OAW-AP1362 (CDD Mode)	

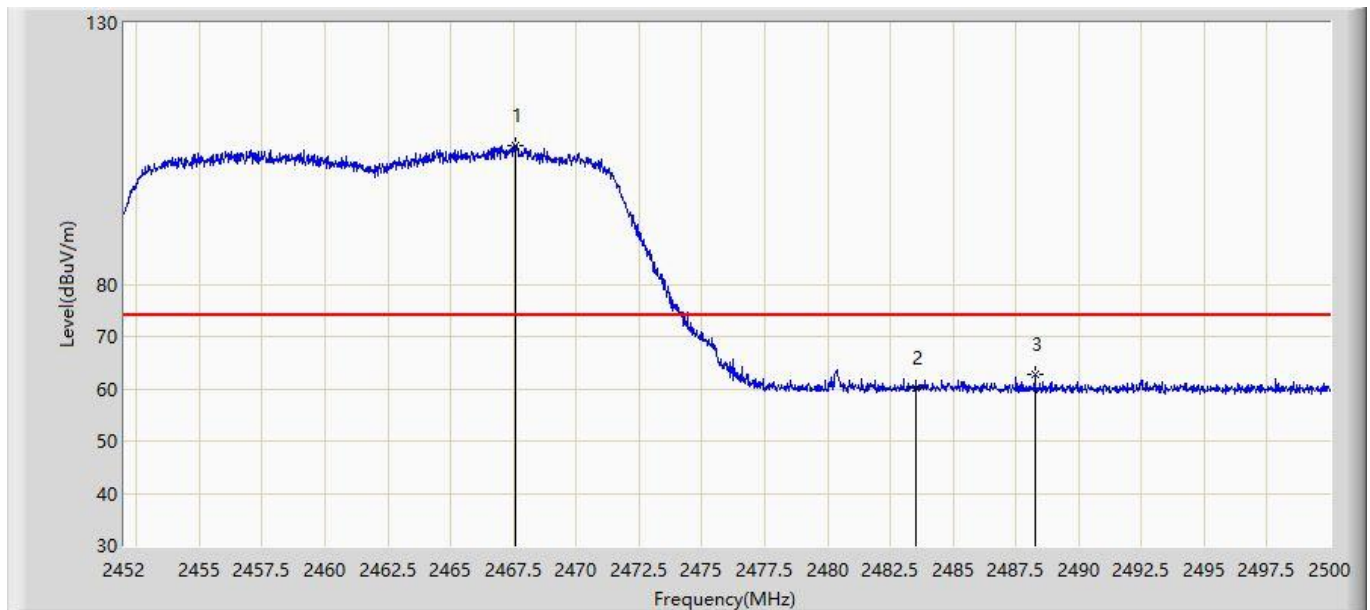


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2467.576	106.501	73.870	N/A	N/A	32.631	PK
2			2483.500	60.167	27.463	-13.833	74.000	32.704	PK
3			2488.264	62.779	30.053	-11.221	74.000	32.726	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2020/03/19 - 13:30
Limit: NCC LP0002_1GHz-40GHz	Engineer: Fran Chen
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE20 at Channel 2462MHz with OAW-AP1362 (CDD Mode)	

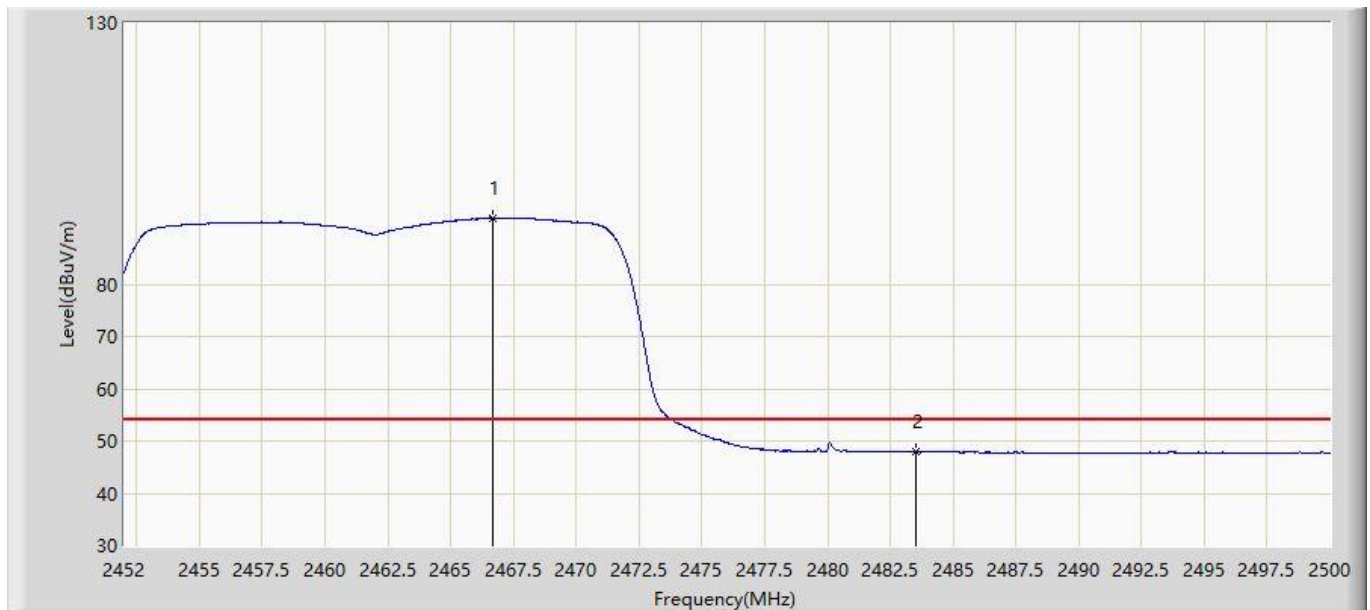


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2466.688	92.719	60.092	N/A	N/A	32.627	AV
2			2483.500	47.873	15.169	-6.127	54.000	32.704	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2020/03/19 - 13:34
Limit: NCC LP0002_1GHz-40GHz	Engineer: Fran Chen
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE40 at Channel 2422MHz with OAW-AP1362 (CDD Mode)	

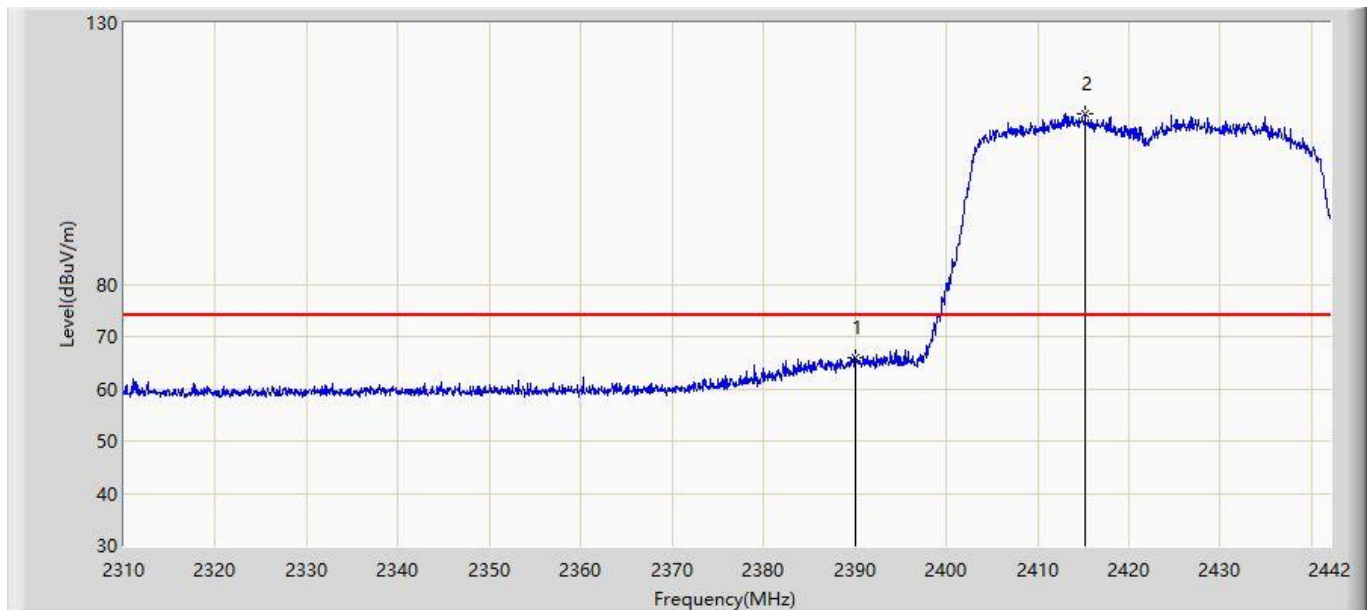


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	65.908	33.634	-8.092	74.000	32.274	PK
2		*	2415.204	112.653	80.264	N/A	N/A	32.389	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2020/03/19 - 13:35
Limit: NCC LP0002_1GHz-40GHz	Engineer: Fran Chen
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE40 at Channel 2422MHz with OAW-AP1362 (CDD Mode)	

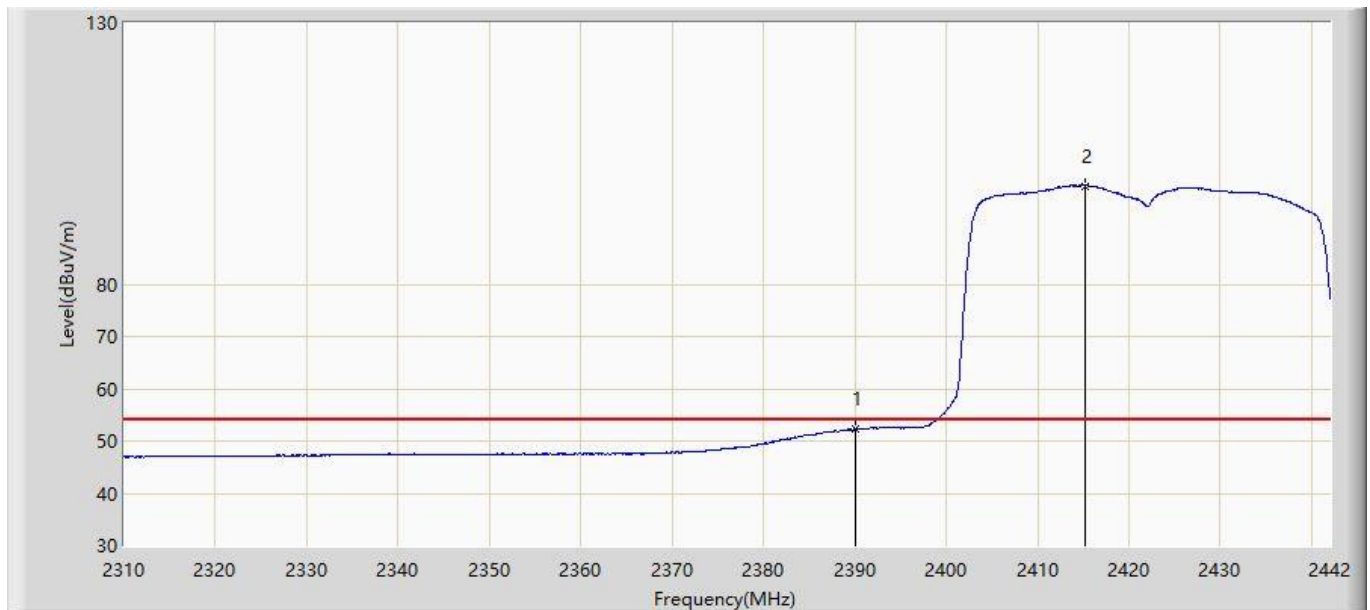


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	52.243	19.969	-1.757	54.000	32.274	AV
2		*	2415.270	98.803	66.413	N/A	N/A	32.390	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2020/03/19 - 13:37
Limit: NCC LP0002_1GHz-40GHz	Engineer: Fran Chen
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE40 at Channel 2422MHz with OAW-AP1362 (CDD Mode)	

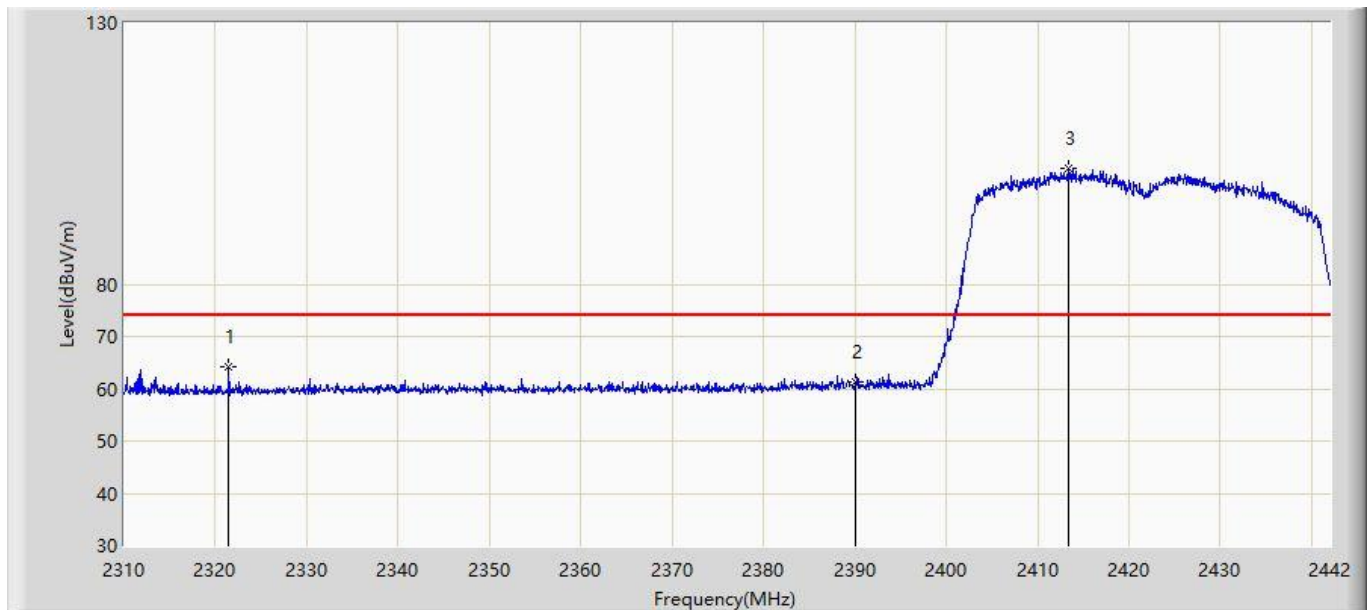


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2321.484	64.276	32.318	-9.724	74.000	31.958	PK
2			2390.000	61.249	28.975	-12.751	74.000	32.274	PK
3		*	2413.422	102.221	69.840	N/A	N/A	32.381	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2020/03/19 - 13:38
Limit: NCC LP0002_1GHz-40GHz	Engineer: Fran Chen
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE40 at Channel 2422MHz with OAW-AP1362 (CDD Mode)	

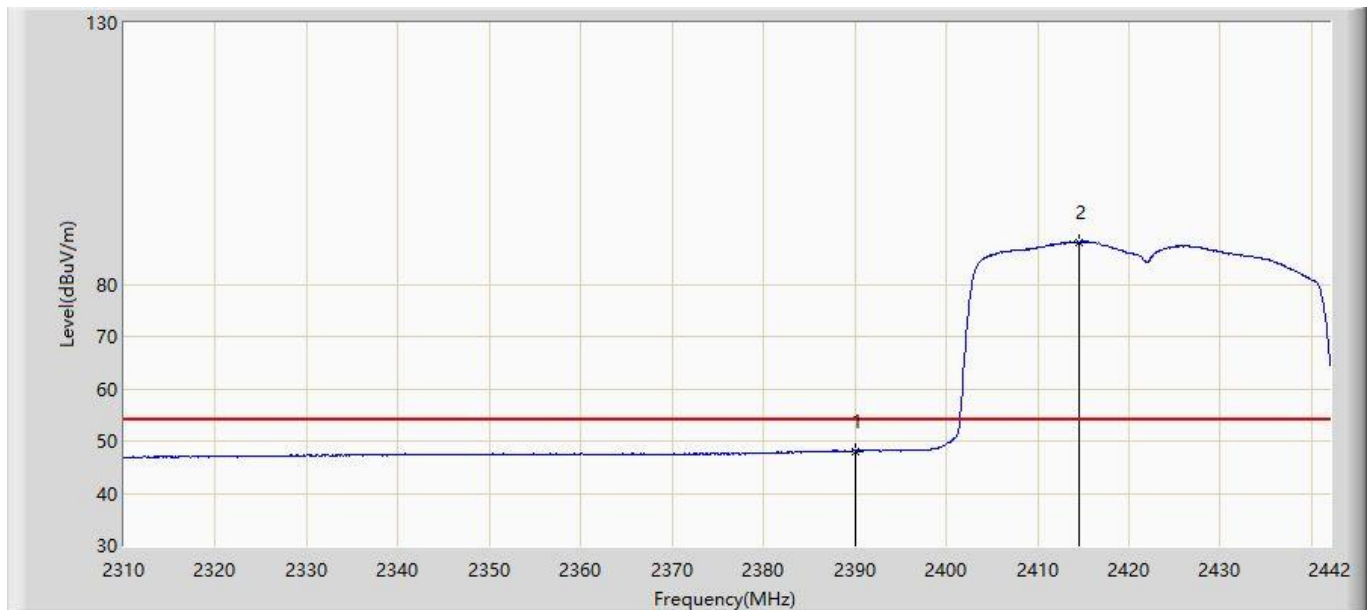


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	48.077	15.803	-5.923	54.000	32.274	AV
2		*	2414.610	88.106	55.720	N/A	N/A	32.386	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2020/03/19 - 13:39
Limit: NCC LP0002_1GHz-40GHz	Engineer: Fran Chen
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE40 at Channel 2452MHz with OAW-AP1362 (CDD Mode)	

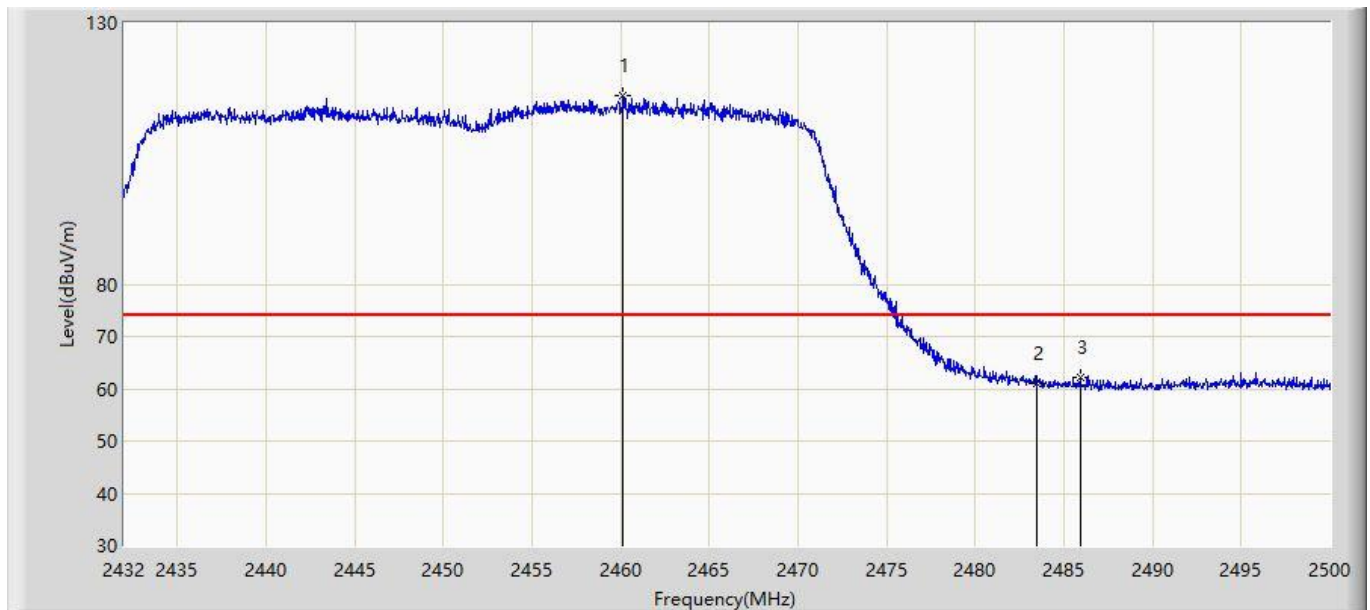


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2460.152	116.019	83.422	N/A	N/A	32.597	PK
2			2483.500	61.013	28.309	-12.987	74.000	32.704	PK
3			2485.924	62.226	29.511	-11.774	74.000	32.715	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2020/03/19 - 13:40
Limit: NCC LP0002_1GHz-40GHz	Engineer: Fran Chen
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE40 at Channel 2452MHz with OAW-AP1362 (CDD Mode)	

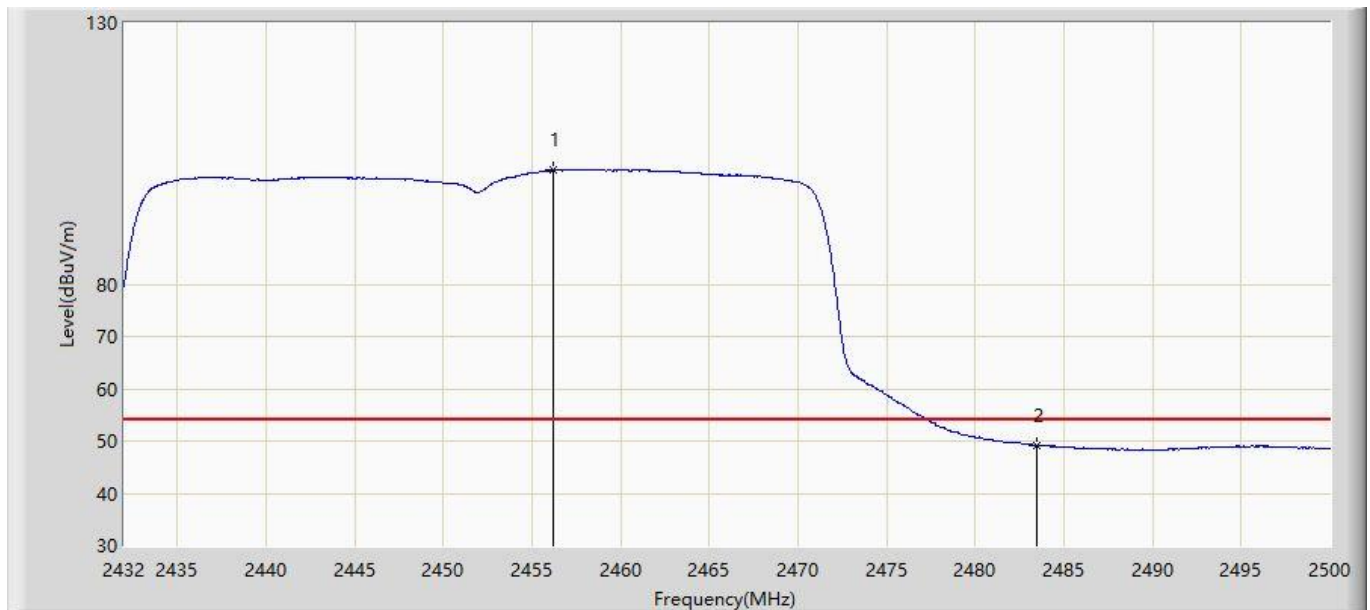


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2456.174	101.782	69.203	N/A	N/A	32.579	AV
2			2483.500	49.218	16.514	-4.782	54.000	32.704	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2020/03/19 - 13:41
Limit: NCC LP0002_1GHz-40GHz	Engineer: Fran Chen
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE40 at Channel 2452MHz with OAW-AP1362 (CDD Mode)	

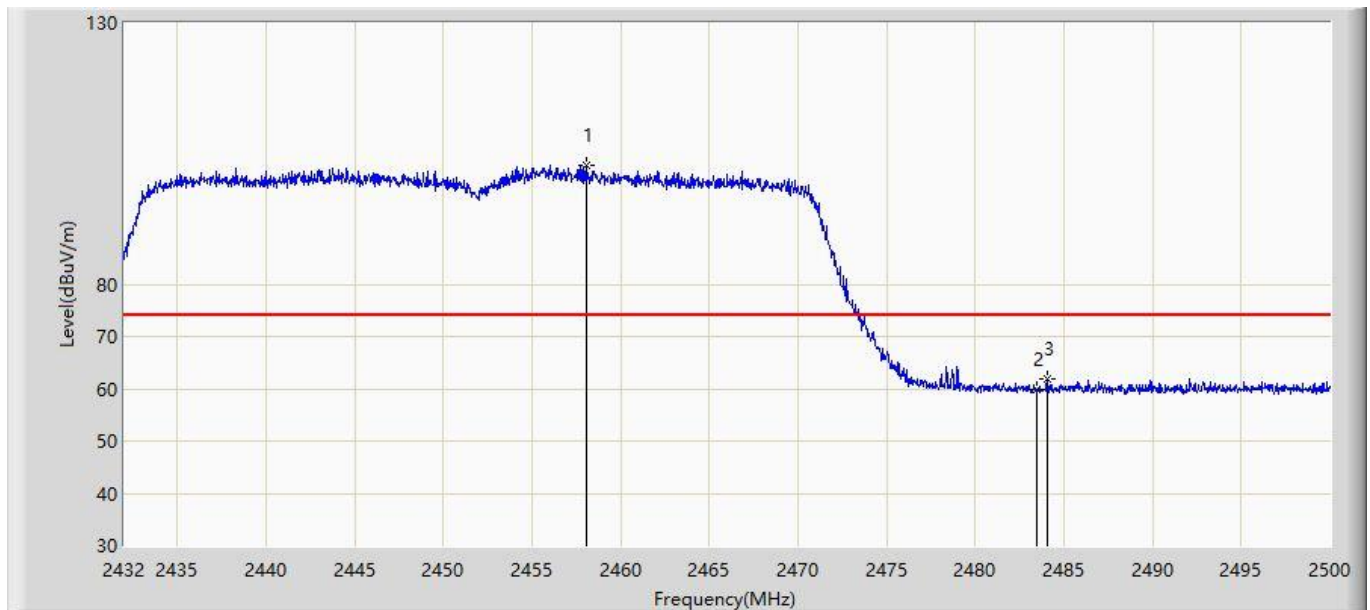


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2458.044	102.886	70.299	N/A	N/A	32.588	PK
2			2483.500	59.765	27.061	-14.235	74.000	32.704	PK
3			2484.054	61.859	29.152	-12.141	74.000	32.707	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2020/03/19 - 13:42
Limit: NCC LP0002_1GHz-40GHz	Engineer: Fran Chen
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE40 at Channel 2452MHz with OAW-AP1362 (CDD Mode)	

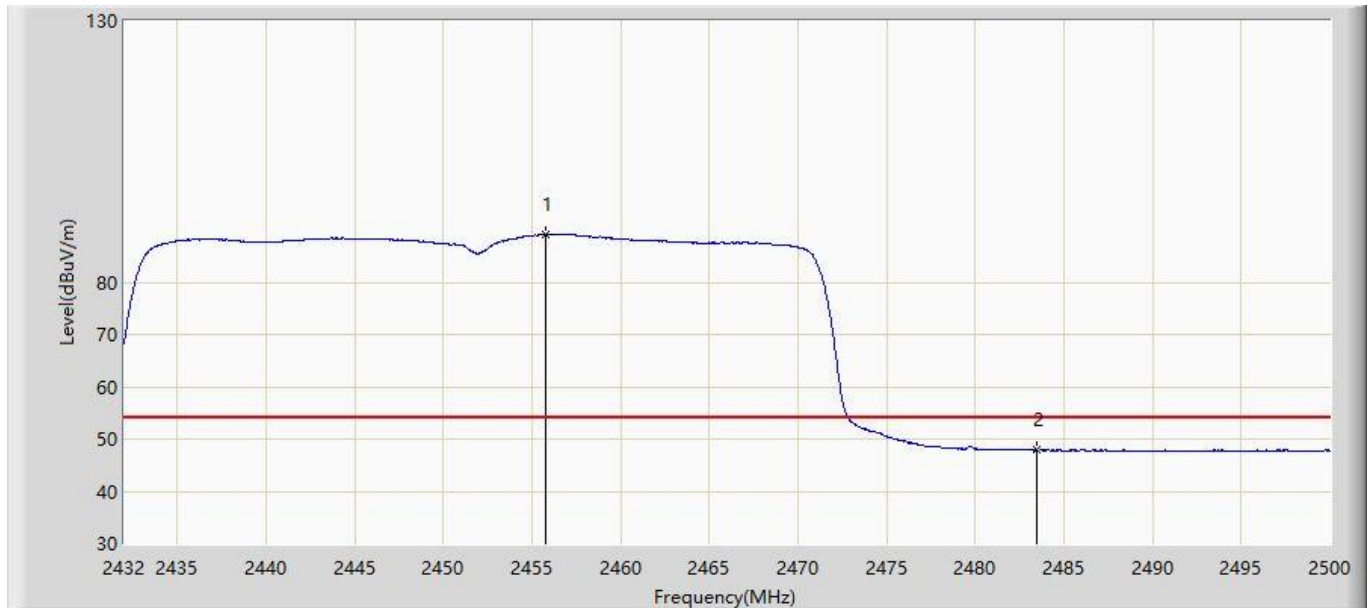

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2455.732	89.200	56.623	N/A	N/A	32.577	AV
2			2483.500	47.859	15.155	-6.141	54.000	32.704	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

5.7. 佔用頻道寬度

5.7.1. 適用標準


依據國家通訊傳播委員會低功率射頻電機技術規範之第 3.10.1.6(2)(A)節之要求，6dB 頻寬至少應有 500kHz。

5.7.2. 量測方法

待測物之天線埠經由適當之衰減直接連至頻譜分析儀 RF 輸入端，設定頻譜分析儀之解析度頻寬為 100kHz，視訊頻寬不小於解析度頻寬，頻率掃瞄範圍(SPAN)遠大於解析度頻寬。

待測物應在正常發射狀態下量測。

5.7.3. 測試架構圖

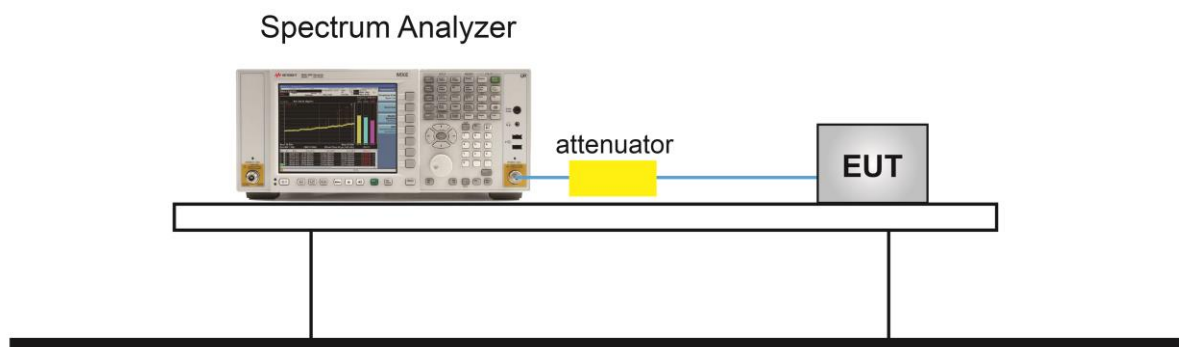

5.7.4.佔用頻帶寬度測試結果

待測物名稱	無線基地台	溫度	24°C
測試工程師	Fran Chen	濕度	56%
測試場地	SR1	測試日期	2020/03/23
型號	OAW-AP1361D	測試項目	佔用頻道寬度

Test Mode	Data Rate / Mbps	Channel No.	Frequency (MHz)	6dB Bandwidth (MHz)	Limit (MHz)	Result
802.11b	1Mbps	01	2412	7.52	≥ 0.5	Pass
802.11b	1Mbps	06	2437	7.55	≥ 0.5	Pass
802.11b	1Mbps	11	2462	8.05	≥ 0.5	Pass
802.11g	6Mbps	01	2412	16.05	≥ 0.5	Pass
802.11g	6Mbps	06	2437	16.34	≥ 0.5	Pass
802.11g	6Mbps	11	2462	16.08	≥ 0.5	Pass
802.11n-HT20	MCS0	01	2412	16.80	≥ 0.5	Pass
802.11n-HT20	MCS0	06	2437	17.31	≥ 0.5	Pass
802.11n-HT20	MCS0	11	2462	17.30	≥ 0.5	Pass
802.11n-HT40	MCS0	03	2422	35.44	≥ 0.5	Pass
802.11n-HT40	MCS0	06	2437	35.99	≥ 0.5	Pass
802.11n-HT40	MCS0	09	2452	35.93	≥ 0.5	Pass
802.11ax-HE20	MCS0	01	2412	18.85	≥ 0.5	Pass
802.11ax-HE20	MCS0	06	2437	18.97	≥ 0.5	Pass
802.11ax-HE20	MCS0	11	2462	18.29	≥ 0.5	Pass
802.11ax-HE40	MCS0	03	2422	36.85	≥ 0.5	Pass
802.11ax-HE40	MCS0	06	2437	38.01	≥ 0.5	Pass
802.11ax-HE40	MCS0	09	2452	37.90	≥ 0.5	Pass

802.11b 6dB Bandwidth - Ant 0 / Ant 0 + 1

Channel 01 (2412MHz)



Channel 06 (2437MHz)




Channel 11 (2462MHz)




802.11g 6dB Bandwidth - Ant 0 / Ant 0 + 1

Channel 01 (2412MHz)

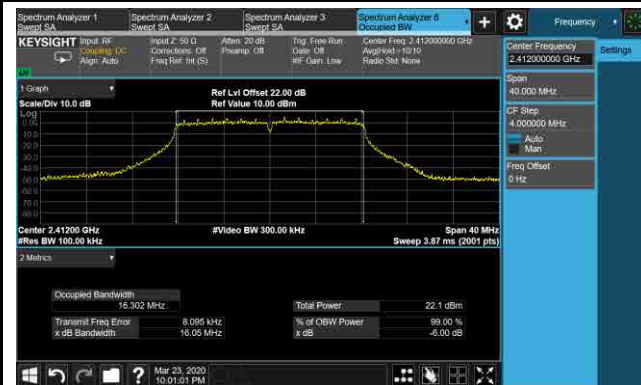

Channel 06 (2437MHz)

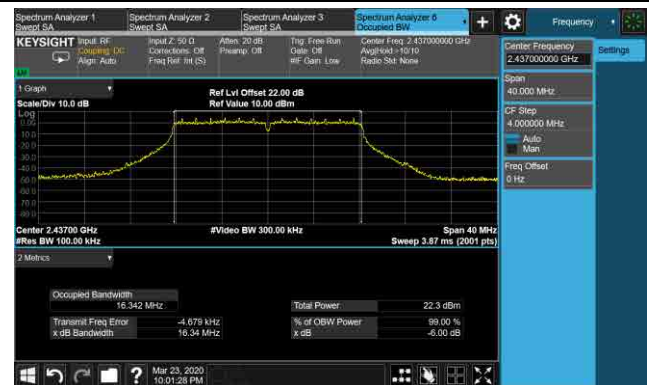

Channel 11 (2462MHz)



802.11n-HT20 6dB Bandwidth - Ant 0 / Ant 0 + 1

Channel 01 (2412MHz)



Channel 06 (2437MHz)




Channel 11 (2462MHz)




802.11n-HT40 6dB Bandwidth - Ant 0 / Ant 0 + 1


Channel 03 (2422MHz)

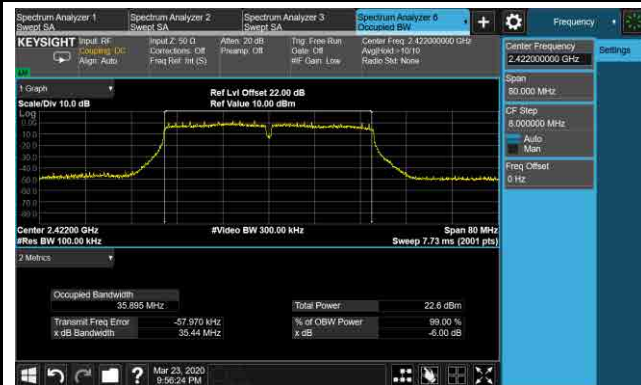

Channel 06 (2437MHz)

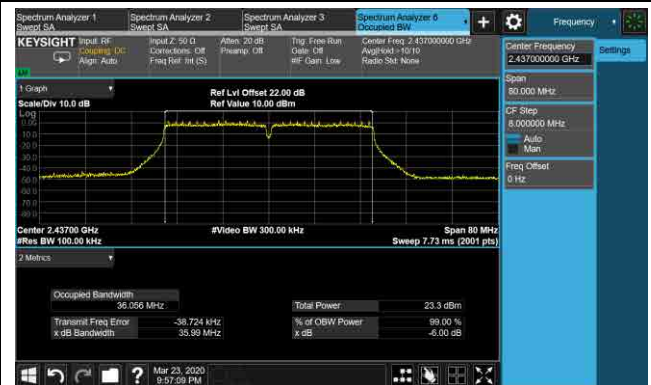


Channel 09 (2452MHz)

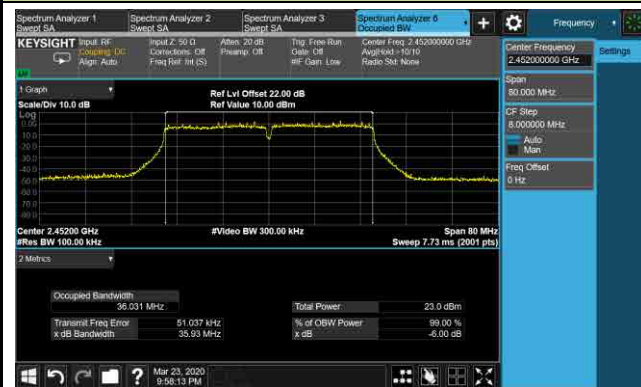


802.11ax-HE20 6dB Bandwidth - Ant 0 / Ant 0 + 1

Channel 01 (2412MHz)

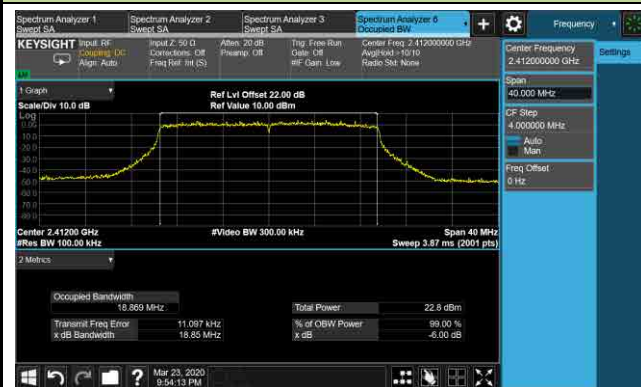

Channel 06 (2437MHz)

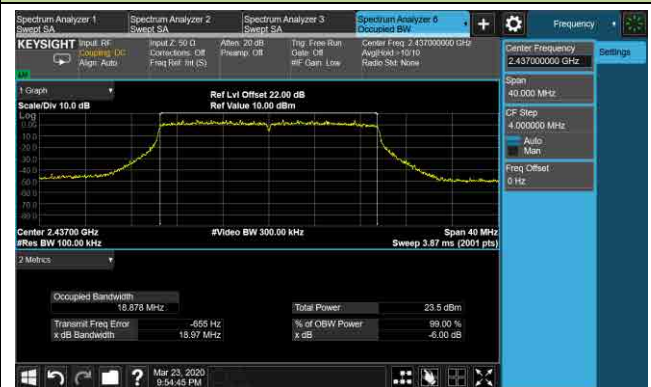


Channel 11 (2462MHz)




802.11ax-HE40 6dB Bandwidth - Ant 0 / Ant 0 + 1


Channel 03 (2422MHz)

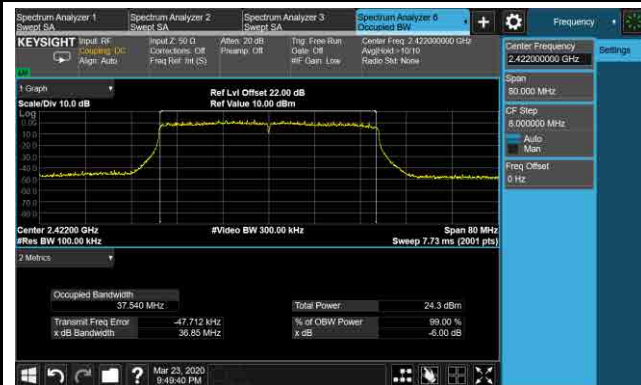

Channel 06 (2437MHz)

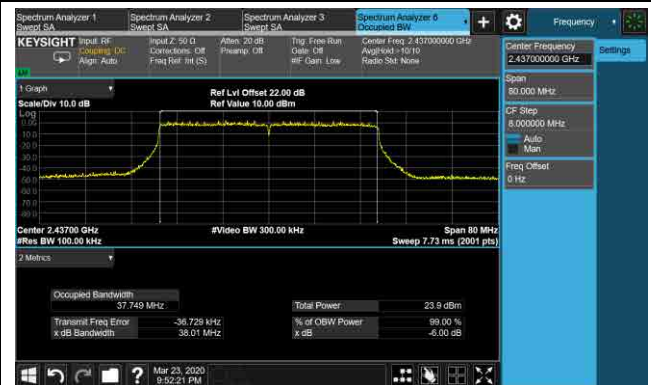

Channel 09 (2452MHz)

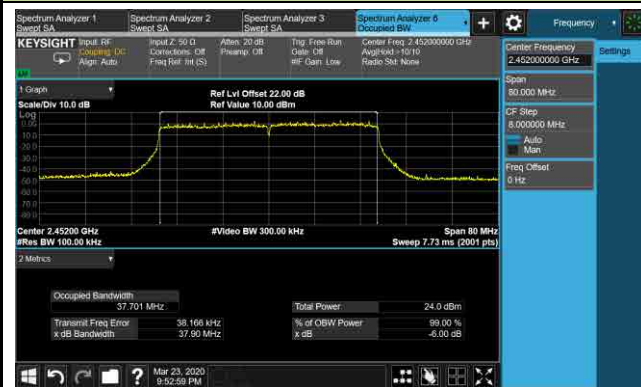

5.8. 發射電功率密度

5.8.1. 適用標準


依據國家通訊傳播委員會低功率射頻電機技術規範之第 3.10.1.6(2)(B)節，在使用頻率範圍之任意 3 千赫(kHz)頻寬內，由發射機傳導至天線之峰值發射電功率密度在任意期間內，皆不得大於 8dBm。

5.8.2. 量測方法

待測物之天線埠經由適當之衰減直接連至頻譜分析儀 RF 輸入端。找出發射峰值並擴展於通帶內，設定頻譜分析儀之解析度頻寬為 3kHz，視訊頻寬大於解析度頻寬，掃瞄時間為頻率掃瞄範圍除以 3kHz。
($\text{SWEEP TIME} = \text{SPAN}/3\text{kHz}$)。

待測物應在正常發射狀態下量測。

5.8.3. 測試架構圖

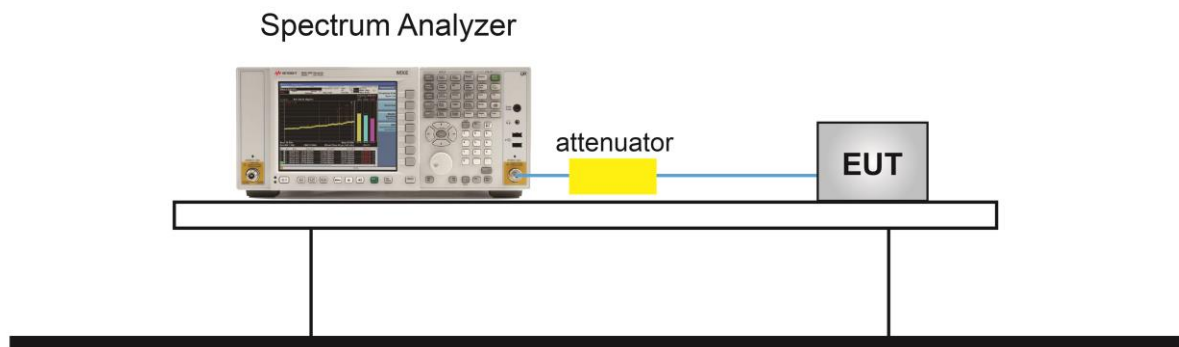

5.8.4.功率密度量測結果

待測物名稱	無線基地台	溫度	24°C
測試工程師	Fran Chen	濕度	56%
測試場地	SR1	測試日期	2020/03/23
型號	OAW-AP1361	測試項目	發射電功率密度

Test Mode	Data Rate/ MCS	Channel No.	Freq. (MHz)	Ant 0 PSD (dBm/ 10kHz)	Ant 1 PSD (dBm/ 10kHz)	Duty Cycle (%)	Total PSD (dBm/ 3kHz)	Limit (dBm/ 3kHz)	Result
802.11b	1Mbps	01	2412	-2.71	-3.05	95.18	0.35	≤ 8.00	Pass
802.11b	1Mbps	06	2437	-2.74	-3.10	95.18	0.31	≤ 8.00	Pass
802.11b	1Mbps	11	2462	-2.50	-1.59	95.18	1.20	≤ 8.00	Pass
802.11g	6Mbps	01	2412	-6.99	-6.96	91.66	-3.59	≤ 8.00	Pass
802.11g	6Mbps	06	2437	-6.01	-5.12	91.66	-2.15	≤ 8.00	Pass
802.11g	6Mbps	11	2462	-5.93	-5.79	91.66	-2.47	≤ 8.00	Pass
802.11n-HT20	MCS0	01	2412	-9.28	-9.13	95.94	-6.01	≤ 8.00	Pass
802.11n-HT20	MCS0	06	2437	-6.14	-5.94	95.94	-2.85	≤ 8.00	Pass
802.11n-HT20	MCS0	11	2462	-6.25	-6.82	95.94	-3.34	≤ 8.00	Pass
802.11n-HT40	MCS0	03	2422	-15.88	-15.84	93.27	-12.55	≤ 8.00	Pass
802.11n-HT40	MCS0	06	2437	-8.74	-8.54	93.27	-8.92	≤ 8.00	Pass
802.11n-HT40	MCS0	09	2452	-12.14	-11.76	93.27	-8.63	≤ 8.00	Pass
11ax-HE20	MCS0	01	2412	-10.17	-10.42	94.98	-7.06	≤ 8.00	Pass
11ax-HE20	MCS0	06	2437	-6.94	-6.45	94.98	-3.45	≤ 8.00	Pass
11ax-HE20	MCS0	11	2462	-8.41	-8.81	94.98	-5.37	≤ 8.00	Pass

Test Mode	Data Rate/ MCS	Chann el No.	Freq. (MHz)	Ant 0 PSD (dBm/ 10kHz)	Ant 1 PSD (dBm/ 10kHz)	Duty Cycle (%)	Total PSD (dBm/ 3kHz)	Limit (dBm/ 3kHz)	Result
11ax-HE40	MCS0	03	2422	-15.85	-15.61	95.58	-12.52	≤ 8.00	Pass
11ax-HE40	MCS0	06	2437	-9.95	-9.44	95.58	-6.48	≤ 8.00	Pass
11ax-HE40	MCS0	09	2452	-11.90	-12.49	95.58	-8.98	≤ 8.00	Pass

Note 1: When EUT duty cycle ≥ 98%, Total AVGPSPD = $10 \cdot \log \{10^{(\text{Ant 0 AVGPSPD}/10)} + 10^{(\text{Ant 1 AVGPSPD}/10)}\}$

Note 2: When EUT duty cycle < 98%, Total AVGPSPD = $10 \cdot \log \{10^{(\text{Ant 0 AVGPSPD}/10)} + 10^{(\text{Ant 1 AVGPSPD}/10)}\} + 10 \cdot \log (1/\text{duty cycle})$

Channel 06 (2437MHz)



The screenshot displays the Spectrum Analyzer 5 software interface. The main window shows a frequency spectrum plot with a yellow trace. A marker is placed at 2.461353 GHz, labeled 'Mkr1 2.461353 GHz -2.501 dBm'. The plot has a scale of 10 dB and a resolution bandwidth of 10 kHz. The interface includes various control panels on the left and right, and a status bar at the bottom showing the date and time.

Top Panel: Spectrum Analyzer 5, Sweep: SA, Input: RF, Coupling: DC, Offset: 0, Filter: 100 Hz, Span: 100 kHz, Center: 2.462000 GHz, ResBW: 10 kHz, Video BW: 10 kHz, Marker: 1, Marker Frequency: 2.461353466 GHz, Settings.

Left Panel: KEYSIGHT, Input: RF, Coupling: DC, Offset: 0, Filter: 100 Hz, Span: 100 kHz, Center: 2.462000 GHz, ResBW: 10 kHz, Video BW: 10 kHz, Scale/Div: 10 dB, Log, 1 Spectrum, Ref Lvl Offset: 22.00 dB, Ref Level: 22.00 dBm, Mkr1 2.461353 GHz -2.501 dBm.

Right Panel: Select Marker, Marker 1, Marker Frequency: 2.461353466 GHz, Settings, Peak Search, Next Peak, Next Pk Right, Next Pk Left, Minimum Peak, Pk-Pk Search, Marker Delta, Mkr --CF, Mkr --Ref Lvl, Continuous Peak Search, On, Off.

Bottom Panel: Center: 2.462000 GHz, ResBW: 10 kHz, Video BW: 10 kHz, Span: 100 kHz, Sweep: 48.8 ms (12000 dB), Mar 23, 2020, 11:23:38 PM.

802.11g AVGPSPD - Ant 0 / Ant 0 + 1

Channel 01 (2412MHz)



Channel 06 (2437MHz)



Channel 11 (2462MHz)

