

## 低功率射頻電機技術規範測試報告

報告編號:

RT160913E02H

申請者

網件有限公司

產品名稱

Pro Gaming Router 夜鷹電競路由器

型號

R6400v2

系列型號

R6700v3, XR300

製造廠商

Netgear, Inc.

商標或廠牌

NETGEAR

該產品樣品試驗

國家通訊傳播委員會低功率射頻電機技術規範

依據之試驗標準

107 年 1 月修訂

試驗結果

合格

香港商立德國際商品試驗有限公司桃園分公司 新竹實驗室

日期 108 年 03 月 06 日

報告簽署人簽章:

陳瓊美



## 目 錄

|                               |           |
|-------------------------------|-----------|
| 報告發行紀錄 .....                  | 5         |
| <b>1 低功率射頻電機量測記錄表 .....</b>   | <b>7</b>  |
| <b>2 一般敘述 .....</b>           | <b>9</b>  |
| 2.1 待測設備 .....                | 9         |
| 2.2 輔助測試之週邊設備描述 .....         | 18        |
| 2.3 測試架構圖 .....               | 19        |
| <b>3 適用規範 .....</b>           | <b>20</b> |
| 3.1 規範要求 .....                | 20        |
| 3.2 限制使用之頻帶 .....             | 24        |
| <b>2.4 GHz 頻段測試紀錄結果 .....</b> | <b>25</b> |
| <b>4 帶外發射之量測 .....</b>        | <b>25</b> |
| 4.1 適用標準 .....                | 25        |
| 4.2 量測方法 .....                | 25        |
| 4.3 量測儀器 .....                | 26        |
| 4.4 測試配置 .....                | 30        |
| 4.5 場強度之計算 .....              | 30        |
| 4.6 量測結果 .....                | 31        |
| 4.6.1 發射諧波 .....              | 31        |
| 4.6.2 接收諧波 .....              | 55        |
| 4.6.3 其它不必要之訊號 .....          | 61        |
| 4.7 量測結果判定 .....              | 62        |
| 4.8 配置照片 .....                | 62        |
| <b>5 電源線傳導干擾之量測 .....</b>     | <b>63</b> |
| 5.1 適用標準 .....                | 63        |
| 5.2 量測方法 .....                | 63        |
| 5.3 量測儀器 .....                | 63        |
| 5.4 測試配置 .....                | 64        |
| 5.5 干擾值之計算 .....              | 64        |
| 5.6 量測結果 (模式一) .....          | 65        |
| 5.7 量測結果 (模式二) .....          | 67        |
| 5.8 量測結果判定 .....              | 68        |
| 5.9 配置照片 .....                | 68        |
| <b>6 6 dB 頻寬之要求 .....</b>     | <b>69</b> |
| 6.1 適用標準 .....                | 69        |
| 6.2 量測方法 .....                | 69        |
| 6.3 量測儀器 .....                | 69        |
| 6.4 測試配置 .....                | 69        |
| 6.5 量測結果 .....                | 70        |
| 6.6 量測結果判定 .....              | 71        |
| <b>7 傳導輸出功率之量測 .....</b>      | <b>72</b> |
| 7.1 適用標準 .....                | 72        |
| 7.2 量測方法 .....                | 72        |
| 7.3 量測儀器 .....                | 72        |
| 7.4 測試配置 .....                | 72        |
| 7.5 量測結果 .....                | 73        |

|           |                               |            |
|-----------|-------------------------------|------------|
| 7.6       | 量測結果判定 .....                  | 73         |
| <b>8</b>  | <b>功率頻譜密度之量測 .....</b>        | <b>74</b>  |
| 8.1       | 適用標準 .....                    | 74         |
| 8.2       | 量測方法 .....                    | 74         |
| 8.3       | 量測儀器 .....                    | 74         |
| 8.4       | 測試配置 .....                    | 74         |
| 8.5       | 量測結果 .....                    | 75         |
| 8.6       | 量測結果判定 .....                  | 77         |
|           | <b>U-NII 頻段測試紀錄結果 .....</b>   | <b>78</b>  |
| <b>9</b>  | <b>帶外發射之量測 .....</b>          | <b>78</b>  |
| 9.1       | 適用標準 .....                    | 78         |
| 9.2       | 量測方法 .....                    | 78         |
| 9.3       | 量測儀器 .....                    | 79         |
| 9.4       | 帶外發射之測試配置 .....               | 83         |
| 9.5       | 場強度之計算 .....                  | 83         |
| 9.6       | 帶外發射之量測結果 .....               | 84         |
| 9.6.1     | 發射諧波 .....                    | 84         |
| 9.6.2     | 接收諧波 .....                    | 160        |
| 9.6.3     | 其它不必要之訊號 .....                | 184        |
| 9.7       | 量測結果判定 .....                  | 185        |
| 9.8       | 輻射量測之配置照片 .....               | 185        |
| <b>10</b> | <b>電源線傳導干擾之量測 .....</b>       | <b>186</b> |
| 10.1      | 適用標準 .....                    | 186        |
| 10.2      | 量測方法 .....                    | 186        |
| 10.3      | 量測儀器 .....                    | 186        |
| 10.4      | 測試配置 .....                    | 186        |
| 10.5      | 干擾值之計算 .....                  | 186        |
| 10.6      | 量測結果 (模式一) .....              | 187        |
| 10.7      | 量測結果 (模式二) .....              | 189        |
| 10.8      | 量測結果判定 .....                  | 190        |
| 10.9      | 配置照片 .....                    | 190        |
| <b>11</b> | <b>傳導輸出功率量測及發射頻寬之要求 .....</b> | <b>191</b> |
| 11.1      | 適用標準 .....                    | 191        |
| 11.2      | 量測方法 .....                    | 191        |
| 11.3      | 量測儀器 .....                    | 191        |
| 11.4      | 測試配置 .....                    | 192        |
| 11.5      | 峰值傳導輸出功率之量測結果 .....           | 193        |
| 11.6      | 量測結果判定 .....                  | 199        |
| <b>12</b> | <b>功率頻譜密度之量測 .....</b>        | <b>200</b> |
| 12.1      | 適用標準 .....                    | 200        |
| 12.2      | 量測方法 .....                    | 200        |
| 12.3      | 量測功率頻譜密度之儀器 .....             | 202        |
| 12.4      | 功率頻譜密度之測試配置 .....             | 202        |
| 12.5      | 功率頻譜密度之量測結果 .....             | 203        |
| 12.6      | 量測結果判定 .....                  | 210        |
| <b>13</b> | <b>6 dB 頻寬之要求 .....</b>       | <b>211</b> |
| 13.1      | 適用標準 .....                    | 211        |

|           |                                                                                 |            |
|-----------|---------------------------------------------------------------------------------|------------|
| 13.2      | 量測方法 .....                                                                      | 211        |
| 13.3      | 量測儀器 .....                                                                      | 211        |
| 13.4      | 測試配置 .....                                                                      | 211        |
| 13.5      | 量測結果 .....                                                                      | 212        |
| 13.6      | 量測結果判定 .....                                                                    | 213        |
| <b>14</b> | <b>電波暴露量之評估 .....</b>                                                           | <b>214</b> |
| 14.1      | 適用標準 .....                                                                      | 214        |
| 14.2      | 評估方法 .....                                                                      | 214        |
| 14.3      | 評估結果 .....                                                                      | 214        |
| <b>15</b> | <b>Radiated Out of Band Emisison (OOBE) Measurement (For U-NII-3 Band).....</b> | <b>215</b> |
| <b>16</b> | <b>檢測實驗室基本資料 .....</b>                                                          | <b>233</b> |

## 報告發行紀錄

| Issue No.    | Description       | Date Issued     |
|--------------|-------------------|-----------------|
| RT160913E02H | Original release. | 108 年 03 月 06 日 |

# 證 明 書

產 品 名 稱：Pro Gaming Router 夜鷹電競路由器  
商 標：NETGEAR  
型 號：R6400v2  
系 列 型 號：R6700v3, XR300  
申 請 者：網件有限公司  
量 測 規 範：低功率射頻電機技術規範 LP0002  
ANSI C63.10-2013

香港商立德國際商品試驗有限公司桃園分公司在此證明上述待測設備樣品(型號：R6400v2)，收件日期 105 年 09 月 13 日，於 105 年 09 月 22 日至 106 年 10 月 27 日，已在本公司的標準測試場地完成量測。報告中所描述之測試結果和待測設備的架構組合，均根據樣品實際的量測情況作詳實的記錄。

立德桃園分公司依“低功率射頻電機技術規範”、“低功率電波輻射性電機管理辦法”及“電信管制射頻器材審驗辦法”製作測試結果報告。

特 此 證 明 ！

報告製作者：

柯昇伶

， 日 期： 108 年 03 月 06 日

柯昇伶 / 專員

審 核 者：

陳瓊美

， 日 期： 108 年 03 月 06 日

陳瓊美 / 經理

香港商立德國際商品試驗有限公司桃園分公司

實驗室地址：300 新竹市科學工業園區力行一路 1 號 E-2

此份報告不得摘錄複製，除全份  
複製外，需經實驗室書面同意。



# 1 低功率射頻電機量測記錄表

申請廠商：網件有限公司

製造廠商：Netgear, Inc.

申請廠商地址：台北市內湖區基湖路3巷9號3樓

廠牌：NETGEAR

產品名稱：Pro Gaming Router 夜鷹電競路由器

型號：R6400v2

系列型號：R6700v3, XR300

量測單位名稱：香港商立德國際商品試驗有限公司桃園分公司 新竹實驗室

量測單位地址：300 新竹市科學工業園區力行一路1號E-2

量測單位認可編號：TAF 2022

量測規範：低功率射頻電機技術規範 LP0002  
ANSI C63.10-2013  
KDB 558074  
KDB 662911  
KDB 789033

## WLAN 2.4GHz 頻段概要

| 項次 | 量測項目     | 規 範                    | 量測結果判定 |
|----|----------|------------------------|--------|
| 1  | 帶外發射     | 低功率射頻電機技術規範 3.10.1.5 節 | 合格     |
| 2  | 電源線傳導干擾  | 低功率射頻電機技術規範 2.3 節      | 合格     |
| 3  | 6 dB 頻寬  | 低功率射頻電機技術規範 3.10.1.6 節 | 合格     |
| 4  | 峰值傳導輸出功率 | 低功率射頻電機技術規範 3.10.1.2 節 | 合格     |
| 5  | 功率頻譜密度   | 低功率射頻電機技術規範 3.10.1.6 節 | 合格     |

## WLAN 5.150~5.250GHz頻段概要

| 項次 | 量測項目     | 規 範                 | 量測結果判定 |
|----|----------|---------------------|--------|
| 1  | 電源線傳導干擾  | 低功率射頻電機技術規範2.3節     | 合格     |
| 2  | 帶外發射     | 低功率射頻電機技術規範4.7.4節   | 合格     |
| 3  | 最大傳導輸出功率 | 低功率射頻電機技術規範4.7.3.1節 | 合格     |
| 4  | 最大功率頻譜密度 | 低功率射頻電機技術規範4.7.3.1節 | 合格     |

## WLAN 5.250~5.350GHz頻段概要

| 項次 | 量測項目                    | 規 範                          | 量測結果判定 |
|----|-------------------------|------------------------------|--------|
| 1  | 電源線傳導干擾                 | 低功率射頻電機技術規範2.3節              | 合格     |
| 2  | 帶外發射                    | 低功率射頻電機技術規範4.7.4節            | 合格     |
| 3  | 最大傳導輸出功率                | 低功率射頻電機技術規範4.7.3.2節          | 合格     |
| 4  | 最大功率頻譜密度                | 低功率射頻電機技術規範4.7.3.2節          | 合格     |
| 5  | 發射功率控制(TPC)及動態頻率選擇(DFS) | 低功率射頻電機技術規範4.7.7.1及4.7.7.2 節 | 合格(註)  |

註： 此份測試報告未包含發射功率控制(TPC)及動態頻率選擇(DFS)量測項目，請參閱DFS報告

#### WLAN 5.470~5.725GHz頻段概要

| 項次 | 量測項目                    | 規 範                          | 量測結果判定 |
|----|-------------------------|------------------------------|--------|
| 1  | 電源線傳導干擾                 | 低功率射頻電機技術規範2.3節              | 合格     |
| 2  | 帶外發射                    | 低功率射頻電機技術規範4.7.4節            | 合格     |
| 3  | 最大傳導輸出功率                | 低功率射頻電機技術規範4.7.3.2節          | 合格     |
| 4  | 最大功率頻譜密度                | 低功率射頻電機技術規範4.7.3.2節          | 合格     |
| 5  | 發射功率控制(TPC)及動態頻率選擇(DFS) | 低功率射頻電機技術規範4.7.7.1及4.7.7.2 節 | 合格(註)  |

註： 此份測試報告未包含發射功率控制(TPC)及動態頻率選擇(DFS)量測項目，請參閱DFS報告

#### WLAN 5.725~5.850GHz 頻段概要

| 項次 | 量測項目     | 規 範                 | 量測結果判定 |
|----|----------|---------------------|--------|
| 1  | 電源線傳導干擾  | 低功率射頻電機技術規範2.3節     | 合格     |
| 2  | 帶外發射     | 低功率射頻電機技術規範4.7.4節   | 合格     |
| 3  | 最大傳導輸出功率 | 低功率射頻電機技術規範4.7.3.3節 | 合格     |
| 4  | 最大功率頻譜密度 | 低功率射頻電機技術規範4.7.3.3節 | 合格     |
| 5  | 6dB 頻寬   | 低功率射頻電機技術規範4.7.5節   | 合格     |

#### 最大暴露允許值(Maximum Permissible Exposure , MPE)

| 項次 | 量測項目  | 規 範                   | 量測結果判定 |
|----|-------|-----------------------|--------|
| 1  | 電波暴露量 | 低功率射頻電機技術規範第 5.20.2 節 | 合格     |

備註：量測結果之判定不考慮量測不確定度的貢獻

## 2 一般敘述

### 2.1 待測設備

|        |                                                                                                                                                                                                                                                                                                                                                                                              |
|--------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 產品名稱：  | Pro Gaming Router 夜鷹電競路由器                                                                                                                                                                                                                                                                                                                                                                    |
| 型號：    | R6400v2                                                                                                                                                                                                                                                                                                                                                                                      |
| 系列型號：  | R6700v3, XR300                                                                                                                                                                                                                                                                                                                                                                               |
| 額定電源：  | 12Vdc from power adapter                                                                                                                                                                                                                                                                                                                                                                     |
| 調變方式：  | CCK, DQPSK, DBPSK for DSSS<br>64QAM, 16QAM, QPSK, BPSK for OFDM<br>256QAM for OFDM in 11ac mode only                                                                                                                                                                                                                                                                                         |
| 調變技術：  | DSSS, OFDM                                                                                                                                                                                                                                                                                                                                                                                   |
| 傳輸速率：  | 802.11b: up to 11Mbps<br>802.11a/g: up to 54Mbps<br>802.11n: up to 450Mbps<br>802.11ac: up to 1300Mbps                                                                                                                                                                                                                                                                                       |
| 載波頻率：  | <b>2.4GHz:</b> 2.412 ~ 2.462GHz<br><b>5GHz:</b> 5.18~ 5.24GHz, 5.26 ~ 5.32GHz, 5.50 ~ 5.70GHz,<br>5.745 ~ 5.825GHz                                                                                                                                                                                                                                                                           |
| 頻道數：   | <b>2.4GHz:</b><br>802.11b, 802.11g, 802.11n (HT20), VHT20: 11<br>802.11n (HT40), VHT40: 7<br><b>5GHz:</b><br>802.11a, 802.11n (HT20), 802.11ac (VHT20): 24<br>802.11n (HT40), 802.11ac (VHT40): 11<br>802.11ac (VHT80): 5                                                                                                                                                                    |
| 發射功率：  | <b>2.4GHz:</b> 27.49 dBm<br><b>5GHz:</b><br><b>CDD Mode:</b><br><b>5.18 ~ 5.24GHz:</b> 27.19 dBm<br><b>5.26 ~ 5.32GHz:</b> 23.32 dBm<br><b>5.50 ~ 5.72GHz:</b> 23.23 dBm<br><b>5.745 ~ 5.825GHz:</b> 29.61 dBm<br><b>Beamforming Mode:</b><br><b>5.18 ~ 5.24GHz:</b> 27.66 dBm<br><b>5.26 ~ 5.32GHz:</b> 23.33 dBm<br><b>5.50 ~ 5.72GHz:</b> 23.51 dBm<br><b>5.745 ~ 5.825GHz:</b> 29.53 dBm |
| 天線種類：  | 見註                                                                                                                                                                                                                                                                                                                                                                                           |
| 電源線類別： | 見註                                                                                                                                                                                                                                                                                                                                                                                           |
| 信號線類別： | NA                                                                                                                                                                                                                                                                                                                                                                                           |
| 配件：    | Adapter x 1                                                                                                                                                                                                                                                                                                                                                                                  |

**註**

1. 此報告為報告 RT160913E02F 之系列報告，本次報告除了變更下列以外其餘皆相同，故符合系列申請。

◆ 新增型號，詳列如下：

| Original                                                                                                                                |         |                                                   |
|-----------------------------------------------------------------------------------------------------------------------------------------|---------|---------------------------------------------------|
| Brand                                                                                                                                   | Model   | Description                                       |
| NETGEAR                                                                                                                                 | R6400v2 | For Marketing                                     |
|                                                                                                                                         | R6700v3 | Removed USB 2.0                                   |
| Newly                                                                                                                                   |         |                                                   |
| Brand                                                                                                                                   | Model   | Description                                       |
| NETGEAR                                                                                                                                 | XR300   | For Marketing<br>XR300 same as R6400v2 except F/W |
| From the above model, model: <b>R6400v2</b> was selected as representative model for the test and its data was recorded in this report. |         |                                                   |

2. 此待測設備對於上述之變更，所有測試項目皆複製自原始報告（原報告號碼：RT160913E02F），並將其量測值記錄於報告中。

3. 同一時間發射條件如下：

| Condition                                                                                                   | Technology    |             |
|-------------------------------------------------------------------------------------------------------------|---------------|-------------|
| 1                                                                                                           | WLAN (2.4GHz) | WLAN (5GHz) |
| <b>Note:</b> The emission of the simultaneous operation has been evaluated and no non-compliance was found. |               |             |

4. 此待測設備搭配使用之電源供應器規格如下：

| No | Brand Name | Model No.     | PN           | Spec.                                                                                         |
|----|------------|---------------|--------------|-----------------------------------------------------------------------------------------------|
| 1  | NETGEAR    | 2ABL030F 1 NA | 332-10758-01 | Input: 100-120Vac, 50/60Hz, 1.0A<br>Output: 12Vdc, 2.5A<br>DC output cable (Unshielded, 1.8m) |
| 2  | NETGEAR    | AD2067F10     | 332-10797-01 | Input: 100-120Vac, 50/60Hz, 1.0A<br>Output: 12Vdc, 2.5A<br>DC output cable (Unshielded, 1.8m) |

Note: From the above adapters, the radiated emission worse case was found in Adapter 2. Therefore only the test data of the mode was recorded in this report.

5. 此待測設備搭配測試的天線，其資料如下：

| Frequency range (MHz) | Directional Antenna Gain (dBi) |
|-----------------------|--------------------------------|
| 2412 ~ 2462           | 5.65                           |
| 5180 ~ 5240           | 5.95                           |
| 5260 ~ 5320           | 5.95                           |
| 5500 ~ 5700           | 5.98                           |
| 5745 ~ 5825           | 5.98                           |

6. 此待測物之技術的種類為 3TX / 3RX 之組合。

| 2.4GHz Band      |                 |                       |     |
|------------------|-----------------|-----------------------|-----|
| MODULATION MODE  | DATA RATE (MCS) | TX & RX CONFIGURATION |     |
| 802.11b          | 1 ~ 11Mbps      | 3TX                   | 3RX |
| 802.11g          | 6 ~ 54Mbps      | 3TX                   | 3RX |
| 802.11n (HT20)   | MCS 0~7         | 3TX                   | 3RX |
|                  | MCS 8~15        | 3TX                   | 3RX |
|                  | MCS16~23        | 3TX                   | 3RX |
| 802.11n (HT40)   | MCS 0~7         | 3TX                   | 3RX |
|                  | MCS 8~15        | 3TX                   | 3RX |
|                  | MCS16~23        | 3TX                   | 3RX |
| 5GHz Band        |                 |                       |     |
| MODULATION MODE  | DATA RATE (MCS) | TX & RX CONFIGURATION |     |
| 802.11a          | 6 ~ 54Mbps      | 3TX                   | 3RX |
| 802.11n (HT20)   | MCS 0~7         | 3TX                   | 3RX |
|                  | MCS 8~15        | 3TX                   | 3RX |
|                  | MCS16~23        | 3TX                   | 3RX |
| 802.11n (HT40)   | MCS 0~7         | 3TX                   | 3RX |
|                  | MCS 8~15        | 3TX                   | 3RX |
|                  | MCS16~23        | 3TX                   | 3RX |
| 802.11ac (VHT20) | MCS0~8 Nss=1    | 3TX                   | 3RX |
|                  | MCS0~8 Nss=2    | 3TX                   | 3RX |
|                  | MCS0~9 Nss=3    | 3TX                   | 3RX |
| 802.11ac (VHT40) | MCS0~9 Nss=1    | 3TX                   | 3RX |
|                  | MCS0~9 Nss=2    | 3TX                   | 3RX |
|                  | MCS0~9 Nss=3    | 3TX                   | 3RX |
| 802.11ac (VHT80) | MCS0~9 Nss=1    | 3TX                   | 3RX |
|                  | MCS0~9 Nss=2    | 3TX                   | 3RX |
|                  | MCS0~9 Nss=3    | 3TX                   | 3RX |

Note:

1. All of modulation mode support beamforming function except 802.11a modulation mode and 2.4GHz band.
2. The modulation and bandwidth are similar for 802.11n mode for 20MHz (40MHz) and 802.11ac mode for 20MHz (40MHz), therefore investigated worst case to representative mode in test report.
3. The EUT support Beamforming and CDD mode, therefore both mode were investigated and the worst case scenario was identified. The worst case data were presented in test report.

7. 此報告中，場強輻射量測經過評估後以下列測試模式進行最終量測。

| 量測項目                            | 發射                                                                                                                                                                         | 接收                           |
|---------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------|
| 2412 ~ 2462MHz                  |                                                                                                                                                                            |                              |
| 1GHz 以上量測                       | 802.11b: Ch 1, 6, 11<br>802.11g: Ch 1, 6, 11<br>802.11n (HT20): Ch 1, 6, 11<br>802.11n (HT40): Ch 3, 6, 9                                                                  | Ch 1, 6, 11                  |
| 其它不必要之訊號                        | 802.11b : Ch 6                                                                                                                                                             | Ch 6                         |
| 5180 ~ 5240MHz                  |                                                                                                                                                                            |                              |
| 1GHz 以上量測                       | 802.11a: Ch 36, 40, 48<br>802.11ac (VHT20): Ch 36, 40, 48<br>802.11ac (VHT40): Ch 38, 46<br>802.11ac (VHT80): Ch 42                                                        | Ch 36, 40, 48                |
| 5260 ~ 5320MHz & 5500 ~ 5720MHz |                                                                                                                                                                            |                              |
| 1GHz 以上量測                       | 802.11a: Ch 52, 60, 64, 100, 116, 140<br>802.11ac (VHT20): Ch 52, 60, 64, 100, 116, 140<br>802.11ac (VHT40): Ch 54, 62, 102, 110, 134<br>802.11ac (VHT80): Ch 58, 106, 122 | Ch 52, 60, 64, 100, 116, 140 |
| 5745 ~ 5825MHz                  |                                                                                                                                                                            |                              |
| 1GHz 以上量測                       | 802.11a: Ch 149, 157, 165<br>802.11ac (VHT20): Ch 149, 157, 165<br>802.11ac (VHT40): Ch 151, 159<br>802.11ac (VHT80): Ch 155                                               | Ch 149, 157, 165             |
| 其它不必要之訊號                        | 802.11ac (VHT40): Ch 110                                                                                                                                                   | Ch 110                       |

\*電源線傳導干擾量測經過評估後，2412 ~ 2462MHz以802.11b : Ch 6測試模式進行最終量測，5180 ~ 5825MHz以802.11ac (VHT40): Ch 110測試模式進行最終量測。

8. 待測設備的測試模式如下：

| 電源線傳導干擾 |                      |
|---------|----------------------|
| 測試模式    | 描述                   |
| 一       | Power from adapter 2 |
| 二       | Power from adapter 1 |
| 場強輻射    |                      |
| 測試模式    | 描述                   |
| 一       | Power from adapter 2 |

## 9. Duty cycle of test signal.

### 2.4GHz 频段


If duty cycle of test signal is  $\geq 98\%$ , duty factor is not required.

**802.11b:** duty cycle of test signal is 100 %

**802.11g:** Duty cycle =  $2.063/2.084 = 0.99$

**802.11n (HT20):** Duty cycle =  $1.919/1.914 = 0.989$

**802.11n (HT40):** Duty cycle =  $0.946/0.962 = 0.983$

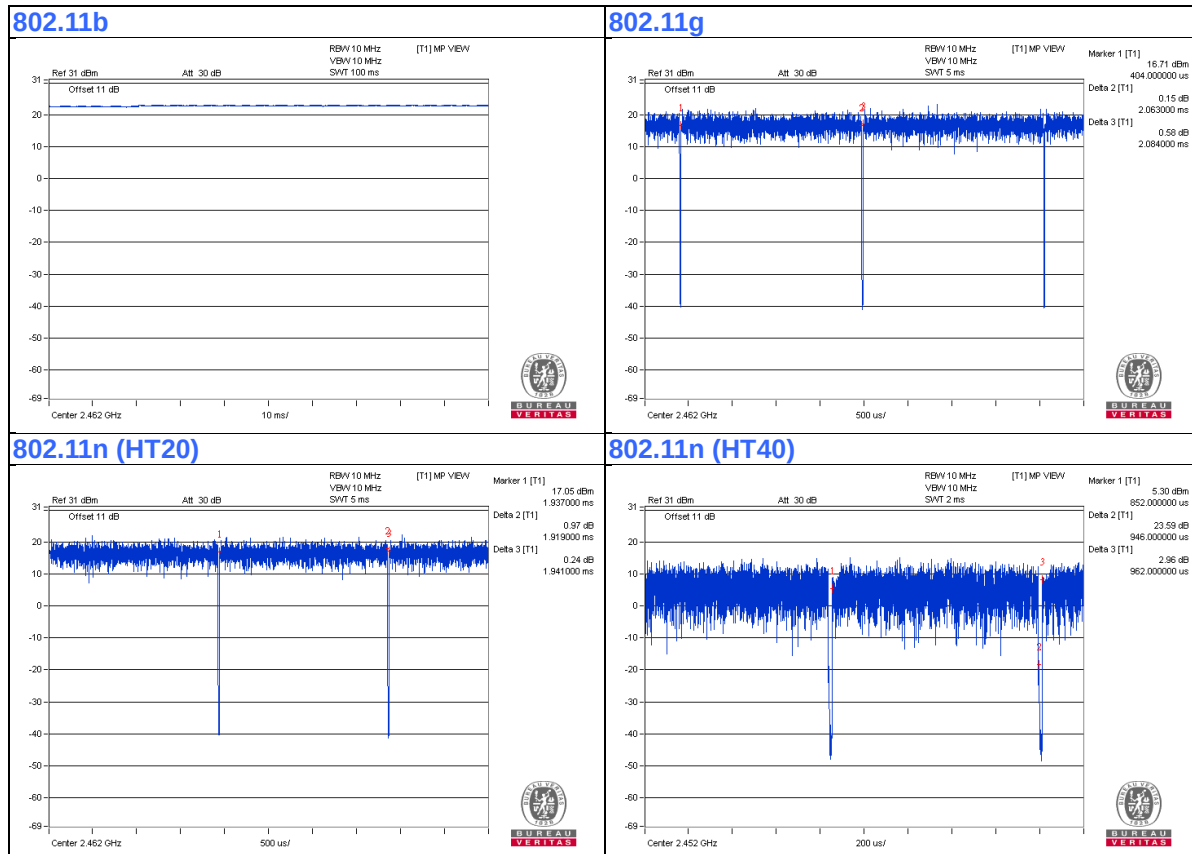

## 5GHz 频段

If duty cycle of test signal is  $\geq 98\%$ , duty factor is not required.


If duty cycle of test signal is  $< 98\%$ , duty factor shall be considered.

**802.11a:** Duty cycle =  $2.062 \text{ ms} / 2.084 \text{ ms} = 0.989$

**802.11ac (VHT20):** Duty cycle =  $1.916 \text{ ms} / 1.939 \text{ ms} = 0.988$

**802.11ac (VHT40):** Duty cycle =  $1.178 \text{ ms} / 1.201 \text{ ms} = 0.981$

**802.11ac (VHT80):** Duty cycle =  $0.459 \text{ ms} / 0.477 \text{ ms} = 0.962$ , Duty factor =  $10 * \log(1/0.962) = 0.17$

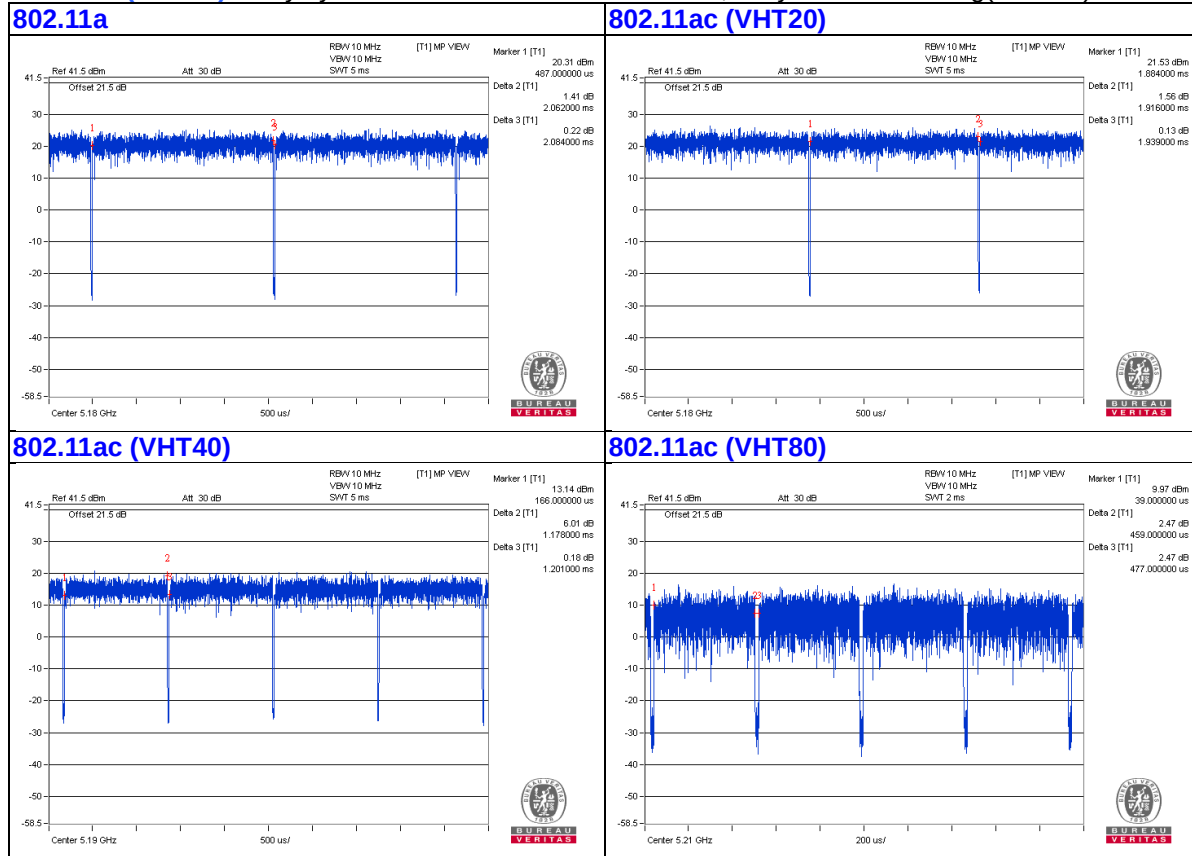

此裝置各頻道的中心頻率如下：

2.4 GHz 頻段：

802.11b, 802.11g, 802.11n (HT20), VHT20:

| 頻道 | 對應頻率<br>(MHz) | 頻道 | 對應頻率<br>(MHz) |
|----|---------------|----|---------------|
| 01 | 2412          | 07 | 2442          |
| 02 | 2417          | 08 | 2447          |
| 03 | 2422          | 09 | 2452          |
| 04 | 2427          | 10 | 2457          |
| 05 | 2432          | 11 | 2462          |
| 06 | 2437          |    |               |

802.11n (HT40), VHT40:

| 頻道 | 對應頻率<br>(MHz) | 頻道 | 對應頻率<br>(MHz) |
|----|---------------|----|---------------|
| 03 | 2422          | 07 | 2442          |
| 04 | 2427          | 08 | 2447          |
| 05 | 2432          | 09 | 2452          |
| 06 | 2437          |    |               |

5GHz 頻段:

802.11a, 802.11n (HT20), 802.11ac (VHT20):

| 頻道  | 對應頻率     | 頻道  | 對應頻率     |
|-----|----------|-----|----------|
| 36  | 5180 MHz | 116 | 5580 MHz |
| 40  | 5200 MHz | 120 | 5600 MHz |
| 44  | 5220 MHz | 124 | 5620 MHz |
| 48  | 5240 MHz | 128 | 5640 MHz |
| 52  | 5260 MHz | 132 | 5660 MHz |
| 56  | 5280 MHz | 136 | 5680 MHz |
| 60  | 5300 MHz | 140 | 5700 MHz |
| 64  | 5320 MHz | 149 | 5745 MHz |
| 100 | 5500 MHz | 153 | 5765 MHz |
| 104 | 5520 MHz | 157 | 5785 MHz |
| 108 | 5540 MHz | 161 | 5805 MHz |
| 112 | 5560 MHz | 165 | 5825 MHz |

802.11n (HT40), 802.11ac (VHT40):

| 頻道  | 對應頻率     | 頻道  | 對應頻率     |
|-----|----------|-----|----------|
| 38  | 5190 MHz | 118 | 5590 MHz |
| 46  | 5230 MHz | 126 | 5630 MHz |
| 54  | 5270 MHz | 134 | 5670 MHz |
| 62  | 5310 MHz | 151 | 5755 MHz |
| 102 | 5510 MHz | 159 | 5795 MHz |
| 110 | 5550 MHz |     |          |

802.11ac (VHT80):

| 頻道  | 對應頻率     | 頻道  | 對應頻率     |
|-----|----------|-----|----------|
| 42  | 5210 MHz | 122 | 5610 MHz |
| 58  | 5290 MHz | 155 | 5775 MHz |
| 106 | 5530 MHz |     |          |

詳細之規格請參考使用說明書，產品的照片請參照 BV 編號:190222E02-2

## 2.2 輔助測試之週邊設備描述

待測設備於受測時均接上其所屬的配件或一般用途之相關設備；下列輔助設備或配件測試中所使用的配備，以形成一個代表待測物實際運作的受測系統。


| ID | Product  | Brand           | Model No. | Serial No.    | FCC ID  | Remarks         |
|----|----------|-----------------|-----------|---------------|---------|-----------------|
| A. | Laptop   | DELL            | E5430     | 4YV4VY1       | FCC DoC | Provided by Lab |
| B. | Laptop   | DELL            | E5430     | HYV4VY1       | FCC DoC | Provided by Lab |
| C. | HUB      | ZyXEL           | ES-116P   | S060H02000215 | FCC DoC | Provided by Lab |
| D. | iPod     | Apple           | MC749TA/A | CC4DN25WDFDM  | NA      | Provided by Lab |
| E. | USB Disk | Transcend(16GB) | NA        | NA            | NA      | Provided by Lab |

Note:

1. All power cords of the above support units are non-shielded (1.8m).

| ID | Descriptions | Qty. | Length (m) | Shielding (Yes/No) | Cores (Qty.) | Remarks            |
|----|--------------|------|------------|--------------------|--------------|--------------------|
| 1. | RJ-45 Cable  | 1    | 10         | No                 | 0            | Provided by Lab    |
| 2. | RJ-45 Cable  | 1    | 10         | No                 | 0            | Provided by Lab    |
| 3. | RJ-45 Cable  | 3    | 10         | No                 | 0            | Provided by Lab    |
| 4. | DC Cable     | 1    | 1.8        | No                 | 0            | Supplied by client |
| 5. | USB Cable    | 1    | 0.1        | Yes                | 0            | Provided by Lab    |

## 2.3 測試架構圖

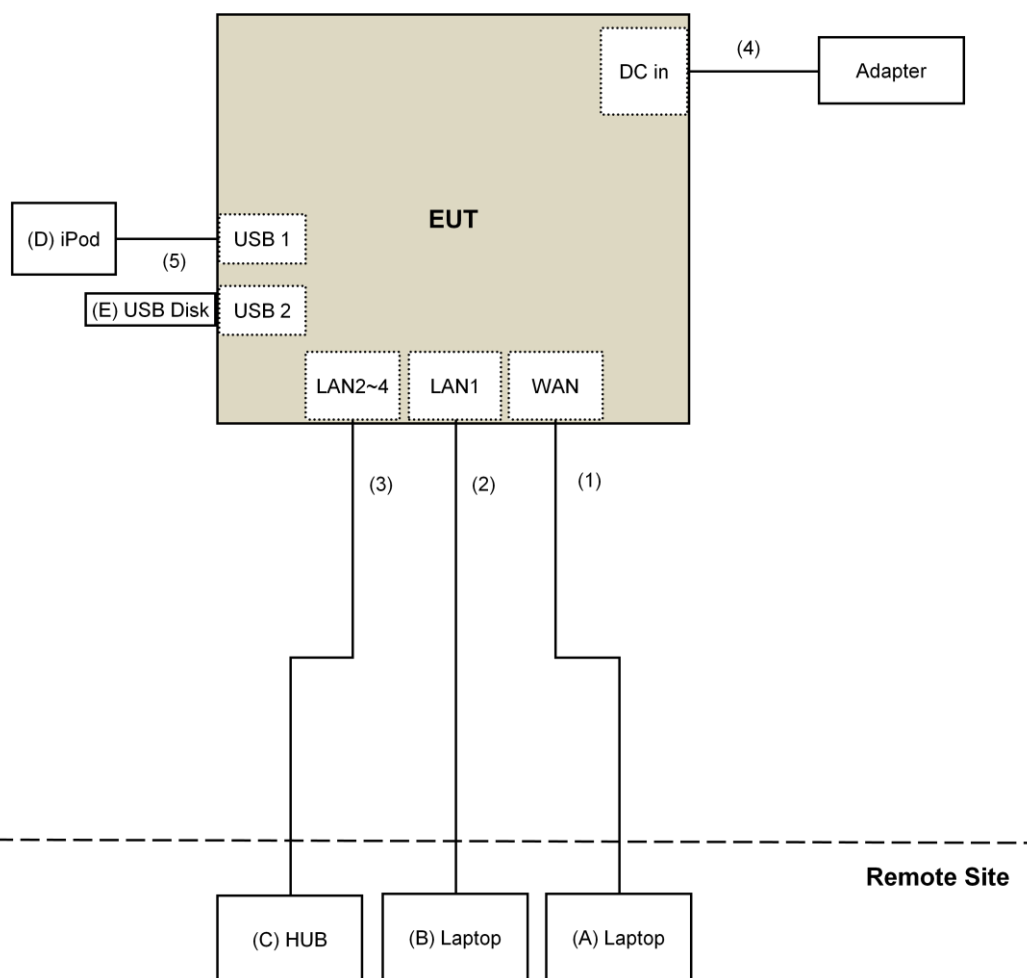

### 3 適用規範

#### 3.1 規範要求

##### (1) 傳導之規定

依據國家通訊傳播委員會低功率射頻電機技術規範之 2.3 節，電源傳導干擾之限制要求如下：

| 頻率(MHz)  | 傳導限制值 (dBuV)    |              |
|----------|-----------------|--------------|
|          | 準峰值(Quasi-peak) | 平均值(Average) |
| 0.15-0.5 | 66-56(註)        | 56-46(註)     |
| 0.5-5    | 56              | 46           |
| 5-30     | 60              | 50           |

(註)：隨頻率之對數遞減。

##### (2) 帶外發射之規定

###### (I) 操作於 2.4000~2.4835 GHz band:

依據國家通訊傳播委員會低功率射頻電機技術規範 3.10.1.5 節之要求，操作頻帶範圍外之任意 100 kHz 內，發射機所產生的射頻功率相較於使用頻帶範圍中包含最高所需功率之 100 kHz 內的射頻功率，其衰減值限制如下：(1) 輸出功率以附件二之峰值輸出功率方式測量者，至少須衰減 20 dB，可使用射頻傳導或輻射方式測量。(2) 輸出功率以 3.10.1.2(1)(C)之最大傳導輸出功率測量方式者，至少須衰減 30 dB。

###### (II) 操作於 5.15 GHz~5.35 GHz 及 5.470 GHz ~5.725 GHz 頻段：

依據國家通訊傳播委員會低功率射頻電機技術規範 4.7.4.1 節之要求，帶外發射之有效等向輻射功率(EIRP)  $\leq -27$  dBm/MHz。

###### (III) 操作於 5.725 GHz~5.850 GHz 頻段：

依據國家通訊傳播委員會低功率射頻電機技術規範 4.7.4.2 節之要求，所有頻帶邊緣向外 5 MHz 內頻率之發射，有效等向輻射功率(EIRP)  $\leq 27$  dBm/MHz~15.6 dBm/MHz (以線性法計算對應之限制值)；所有頻帶邊緣向外 5 MHz~25 MHz，有效等向輻射功率 35(EIRP)  $\leq 15.6$  dBm/MHz~10 dBm/MHz (以線性法計算對應之限制值)；所有頻帶邊緣外 25 MHz~75 MHz，有效等向輻射功率(EIRP)  $\leq 10$  dBm/MHz~-27 dBm/MHz(以線性法計算對應之限制值)；所有頻帶邊緣外  $\geq 75$  MHz 的頻率之發射，有效等向輻射功率(EIRP)  $\leq -27$  dBm/MHz；有關遮罩限制值詳圖 1。

在 5.725 GHz~5.850 GHz 頻段操作且天線增益大於 10dBi 之設備於 106 年 3 月 2 日前得適用 3.10.1.5 帶外發射限制；在 5.725 GHz~5.850 GHz 頻段操作且天線增益小於等於 10dBi 之設備於 107 年 3 月 2 日前得適用 3.10.1.5 帶外發射限制規定。

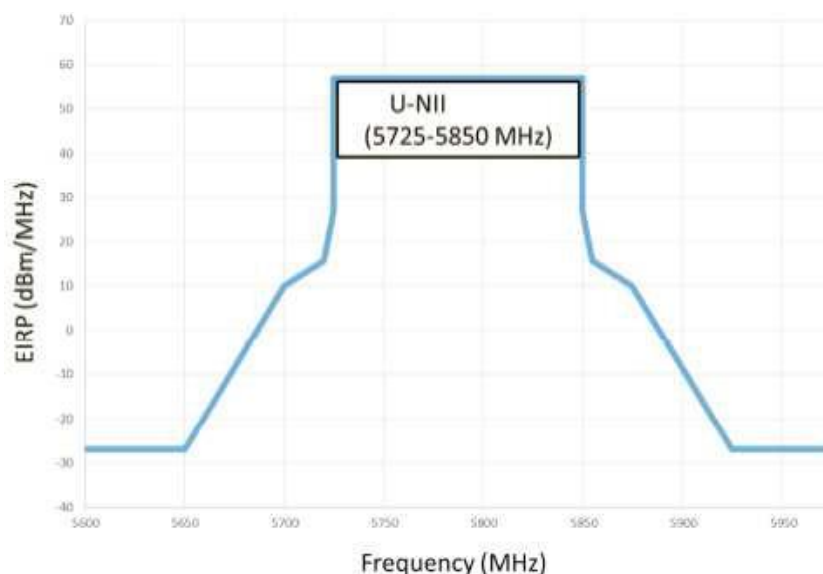


圖 1

在 1 GHz 以下不必要之發射，應符合 2.8 之規定。此外，落於 2.7 禁用頻段之輻射發射，應符合 2.8 之規定。

| 頻率(MHz)                | 電場強度(微伏特/公尺, uV/m) | 測距(公尺) |
|------------------------|--------------------|--------|
| 0.009 - 0.490(含)       | 2,400/f(kHz)       | 300    |
| 0.490 (不含) - 1.705 (含) | 24,000/f(kHz)      | 30     |
| 1.705(不含) - 30 (不含)    | 30                 | 30     |
| 30 (含) - 88 (含)        | 100                | 3      |
| 88 (不含)- 216 (含)       | 150                | 3      |
| 216 (不含)- 960 (含)      | 200                | 3      |
| 960 (不含)以上             | 500                | 3      |

### (3)天線之規定

天線規格不受第 2.2 節規定之限制。

### (4)天線增益之要求

低功率發射機，依據國家通訊傳播委員會低功率射頻電機技術規範 3.10.1.3 節及 4.7.3 節之規定如下：

#### (I) 操作於 2400 MHz~2483.5 MHz 頻段：

- (A) 進行固定式點對點操作時，其發射天線之方向性增益超過6 dBi，每超過3 dBi，最大傳導輸出功率限制值應降低1 dB。
- (B) 天線以多向波束發射方式(含同時發射或循序發射)將訊號導向多個接收機或接收機群組時，應符合下列規定：
  - (a) 非同時發射多向波束者，所有載波或頻道傳輸至所有天線陣列或陣列群之總和傳導輸出功率應符合 3.10.1.2 之功率限制值。如天線/天線陣列群之方向性增益超過6 dBi，每超過3 dBi，總和傳導輸出功率限制值應降低1 dB。方向性增益值應計算如下：
    - (i) 方向性增益值= 10log(天線陣列之單元數目)+各單元中最高之方向性增益值。
    - (ii) 天線陣列間之遮蔽效應或波束干涉損失能充分佐證時，方向性增益得低於(i)計算數值。
  - (b) 同時發射多向波束於相同或不同頻道者，其每一波束功率應符合(a)之功率限制值。如發射波束有重疊現象，功率應降低，以確保總和傳導輸出功率符合(a)之限制值。同時發射的所有波束總和傳導輸出功率不大於(a) 總和傳導輸出功率限制值加8 dB。方向性增益值計算同(a)。
  - (c) 發射機之天線具備單向波束功能者，應符合(1)(A)及(3)後段之規定。

除(A)及(B)外，使用超過6 dBi 方向增益之發射天線時，應依超過6 dBi 天線方向增益的dBi 總量，等量減少最大傳導輸出功率限制值。

#### (II) 操作於 5.15 GHz~5.25 GHz 頻段：

- (A) 供戶外操作使用：使用超過6 dBi 方向增益之發射天線時，應依超過6 dBi 天線方向增益的dBi 總量，等量減少最大傳導輸出功率及最大功率頻譜密度。在水平面仰角超過30 度時，其最大EIRP 應小於或等於21 dBm。
- (B) 供室內操作使用：使用超過6 dBi 方向增益之發射天線時，應依超過6 dBi 天線方向增益的dBi 總量，等量減少最大傳導輸出功率及最大功率頻譜密度。
- (C) 供固定式點對點操作使用：使用超過23 dBi方向增益之指向性天線時，應依超過23 dBi天線方向增益的dBi 總量，等量減少最大傳導輸出功率及最大功率頻譜密度。固定式點對點操作，不包括點對多點系統、全方向性應用及多台共站發射機傳送相同資訊。
- (D) 供用戶端裝置(Client Device)操作使用：使用超過6 dBi 方向增益之發射天線時，應依超過6 dBi 天線方向增益的dBi 總量，等量減少最大傳導輸出功率及最大功率頻譜密度。

#### (III) 操作於 5.25 GHz~5.35 GHz 與 5.470 GHz ~5.725 GHz 頻段：

使用超過 6 dBi 方向增益之發射天線時，應依超過 6 dBi 天線方向增益的 dBi 總量，等量減少最大傳導輸出功率及最大功率頻譜密度。

#### (IV) 操作於 5.725 GHz~5.850 GHz 頻段：

- (A) 供固定式點對點操作時，使用方向增益超過6 dBi 之發射天線，可不需對應減少發射器之傳導輸出功

率限制值。

(B) 除(A)外，使用超過6 dBi 方向增益之發射天線時，應依超過6 dBi 天線方向增益的dBi 總量，等量減少最大傳導輸出功率及最大功率頻譜密度。

(5) 6dB 頻寬之要求

(I) 操作於 2400 MHz~2483.5 MHz 頻段：

對使用數位調變技術(digital modulation techniques)系統之低功率發射機，依據國家通訊傳播委員會低功率射頻電機技術規範 3.10.1.6 節之規定，6dB 頻寬至少應有 500kHz。

(II) 操作於 5.725 GHz~5.850 GHz 頻段：

依據國家通訊傳播委員會低功率射頻電機技術規範 4.7.5 節之規定，其 6dB 頻寬至少應有 500kHz。

(6) 傳導輸出功率之要求

(I) 操作於 2.4000~2.4835 GHz band:

依據國家通訊傳播委員會低功率射頻電機技術規範 3.10.1.2 節之規定：

數位調變技術系統：1 W(含)以下。

(II) 操作於 5.15 GHz~5.25 GHz 頻段：

依據國家通訊傳播委員會低功率射頻電機技術規範 4.7.3.1 節之要求：

(A) 供戶外操作使用/供室內操作使用/供固定式點對點操作使用：最大傳導輸出功率應小於或等於1 W。

(B) 供用戶端裝置(Client Device)操作使用：最大傳導輸出功率應小於或等於250 mW。

(III) 操作於 5.25 GHz~5.35 GHz 及 5.470 GHz ~5.725 GHz 頻段：

依據國家通訊傳播委員會低功率射頻電機技術規範4.7.3.2節之規定，最大傳導輸出功率應小於或等於250 mW或11dBm+10log B (B是26 dB發射頻寬，單位MHz)之較小者。

(IV) 操作於 5.725 GHz~5.850 GHz 頻段：

依據國家通訊傳播委員會低功率射頻電機技術規範 4.7.3.3 節之規定，最大傳導輸出功率應小於或等於 1 W。

(7) 功率頻譜密度之要求

(I) 操作於 2.4000~2.4835 GHz band:

依據國家通訊傳播委員會低功率射頻電機技術規範 3.10.1.6 節之規定，在使用頻率範圍之任一 3 kHz 頻寬內，由發射機傳導至天線之功率頻譜密度在任意傳輸期間內，皆小於或等於 8 毫分貝(dBm)，且應依 3.10.1.3 之方式降低功率頻譜密度限制值。

(II) 操作於 5.15 GHz~5.25 GHz 頻段：

依據國家通訊傳播委員會低功率射頻電機技術規範 4.7.3.1 節之要求：

(A) 供戶外操作使用/供室內操作使用/供固定式點對點操作使用：在任何1 MHz 頻帶中最大功率頻譜密度應小於或等於17 dBm。

(B) 供用戶端裝置(Client Device)操作使用：在任何1 MHz 頻帶中最大功率頻譜密度應小於或等於11 dBm。

(III) 操作於 5.25 GHz~5.35 GHz 及 5.470 GHz ~5.725 GHz 頻段：

依據國家通訊傳播委員會低功率射頻電機技術規範4.7.3.2節之規定，最大功率頻譜密度在任何1 MHz 頻帶中應小於或等於11 dBm。

(IV) 操作於5.725 GHz~5.850 GHz頻段：

依據國家通訊傳播委員會低功率射頻電機技術規範 4.7.3.3 節之規定，在任何 500 kHz 頻帶中最大功率頻譜密度應小於或等於 30 dBm。

(8) 發射功率控制(TPC)及動態頻率選擇(DFS)之要求

依據國家通訊傳播委員會低功率射頻電機技術規範4.7.7.1及4.7.7.2節之規定。

發射功率控制(TPC)：操作於5.25 GHz~5.35 GHz 與5.470 GHz~5.725 GHz 頻段的設備，應具備發射功率控制功能。設備必須至少具有6 dB低於平均EIRP 30 dBm的能力。EIRP 低於500 mW 之系統不須具備TPC 功能。

動態頻率選擇(DFS)：操作於5.25 GHz~5.35 GHz與5.470 GHz~5.725 GHz頻段之設備應具備動態頻率選擇雷達偵測功能並啟動之，以完整偵測使用頻帶內之雷達訊號，避免與雷達系統同頻道操作。相關規定如下：

(1) 最低動態頻率選擇的偵測門檻

- (A) 最大EIRP 為200 mW~1 W之設備，其最低動態頻率選擇的偵測門檻值為-64dBm。
- (B) 最大EIRP 低於200 mW，且功率頻譜密度小於10 dBm/MHz 之設備，其最低動態頻率選擇的偵測門檻值為-62 dBm。
- (C) 最大EIRP 低於200 mW，且功率頻譜密度大於或等於10 dBm/MHz 之設備，其最低動態頻率選擇的偵測門檻值為-64 dBm。
- (D) 此偵測門檻值為1 微秒內之平均接收功率，並以0 dBi 天線為參考基準。頻道初始設定得由系統隨機選取或使用者手動選取。

(2) 操作模式：動態頻率選擇之規定適用於以下之操作模式：

- (A) 頻道可用性檢查時間之規定，適用於主控運作模式。
- (B) 頻道移動時間之規定，適用於主控及受控運作模式。

(3) 頻道可用性檢查時間：設備必須檢查其可在某一頻道上起始傳送之前是否有雷達系統已經操作在該頻道上，以及何時其必須移動到另一新的頻道，在60 秒內若沒有偵測到功率位準大過上述之干擾門檻值的雷達訊號時，設備才可開始使用該頻道。

(4) 頻道移動時間：在偵測到雷達的存在後，所有在該操作頻道上的所有傳輸須在10秒內停止，在偵測到雷達訊號後，該期間內的傳輸應維持最多200 毫秒的正常通訊。另外，間歇性的管理與控制訊號可在剩餘的時間中傳送，以便撤離該操作頻道。

(5) 不可佔用期間：某一頻道已被頻道可用性檢查或"服務中"監視顯示含有雷達系統，至少須有30 分鐘的不可佔用期間。不可佔用期間起始於偵測到雷達系統的當時。

(9)無線資訊傳輸設備必須擁有安全功能之要求：

依據國家通訊傳播委員會低功率射頻電機技術規範4.7.7.3節之規定，無線資訊傳輸設備必須擁有安全功能，以保護未經授權之一方更改軟體。製造商應提出符合本節規定之相關證明文件或符合性聲明。

(10) 依據國家通訊傳播委員會低功率射頻電機技術規範 4.7.7.4 節之規定，製造商必須在操作於 U-NII 頻段上之數位調變系統中提供安全功能，使第三方團體無法重寫程式，使其操作於非經認證之設定。該軟體必須避免發射機操作於非經認證之頻率、輸出功率、調變形式或其他射頻參數。製造商可使用私有網路，只有經授權的用戶能下載軟體、進行軟體式電子簽章或硬體式的韌體更新，新的軟體可以被合法的載入到設備中，同時又能符合上述事項，並於應用程式中描述設備授權的方法。

(11) 依據國家通訊傳播委員會低功率射頻電機技術規範 4.7.7.5 節之規定，製造商必須確保 DFS 功能無法被無線資訊傳輸設備之操作者取消。

(12)電波暴露量之評估

依據國家通訊傳播委員會低功率射頻電機技術規範 5.20.2 節之規定，若受測物於正常操作模式下，其發射機距離人體 20 公分以上者，可測試最大暴露允許值(Maximum Permissible Exposure, MPE)以證明其符合電波暴露量之要求。

限制值如下：

(1) 職業性/可控制之暴露

| 頻率範圍<br>(MHz)   | 電場強度<br>(V/m) | 磁場強度<br>(A/m) | 功率密度<br>(mW/cm <sup>2</sup> ) | 平均時間<br>(minutes) |
|-----------------|---------------|---------------|-------------------------------|-------------------|
| 0.3 - 3.0       | 614           | 1.63          | *100                          | 6                 |
| 3 - 30          | 1842/f        | 4.89/f        | *900/f <sup>2</sup>           | 6                 |
| 30 - 300        | 61.4          | 0.163         | 1.0                           | 6                 |
| 300 - 1,500     | ---           | ---           | f/300                         | 6                 |
| 1,500 - 100,000 | ---           | ---           | 5.0                           | 6                 |

註 1：標記\*表平面波等效功率密度。

註 2：f 表測試頻率，單位：MHz。

## (2) 一般人/不可控制之暴露

| 頻率範圍<br>(MHz)   | 電場強度<br>(V/m) | 磁場強度<br>(A/m) | 功率密度<br>(mW/cm <sup>2</sup> ) | 平均時間<br>(minutes) |
|-----------------|---------------|---------------|-------------------------------|-------------------|
| 0.3 - 3.0       | 614           | 1.63          | *100                          | 30                |
| 3 - 30          | 1842/f        | 4.89/f        | *180/f <sup>2</sup>           | 30                |
| 30 - 300        | 27.5          | 0.073         | 1.0                           | 30                |
| 300 - 1,500     | ---           | ---           | f/1500                        | 30                |
| 1,500 - 100,000 | ---           | ---           | 1.0                           | 30                |

註 1：標記\*表平面波等效功率密度。

註 2：f 表測試頻率，單位：MHz。

## 3.2 限制使用之頻帶

除本規範另有規定外，任何低功率射頻電機之主波皆不得使用下表所列各頻段之頻率；低功率射頻電機落於下表所列頻段之混附發射，其電場強度必須符合 2.8 之限制規定。

| 頻率(兆赫)        | 頻率(兆赫)        | 頻率(兆赫)        |
|---------------|---------------|---------------|
| 0.090~0.110   | 240.00~285.00 | 3332.0~3339.0 |
| 0.490~0.510   | 322.00~335.40 | 3345.8~3358.0 |
| 2.172~2.198   | 399.90~410.00 | 3500.0~4400.0 |
| 3.013~3.033   | 485.00~510.00 | 4500.0~5250.0 |
| 4.115~4.198   | 608.00~614.00 | 5350.0~5460.0 |
| 5.670~5.690   | 703.00~748.00 | 7250.0~7750.0 |
| 6.200~6.300   | 758.00~803.00 | 8025.0~8500.0 |
| 8.230~8.400   | 825.00~915.00 | 9000.0~9200.0 |
| 12.265~12.600 | 930.00~1240.0 | 9300.0~9500.0 |
| 13.340~13.430 | 1300.0~1427.0 | 10600~12700   |
| 14.965~15.020 | 1435.0~1626.5 | 13250~13400   |
| 16.700~16.755 | 1660.0~1785.0 | 14470~14500   |
| 19.965~20.020 | 1805.0~1880.0 | 15350~16200   |
| 25.500~25.700 | 1885.0~1900.0 | 17700~21400   |
| 37.475~38.275 | 1905.0~1985.0 | 22010~23120   |
| 73.500~75.400 | 2010.0~2025.0 | 23600~24000   |
| 108.00~138.00 | 2110.0~2170.0 | 31200~31800   |
| 149.90~150.05 | 2200.0~2300.0 | 36430~36500   |
| 156.70~156.90 | 2310.0~2390.0 | 38600 以上      |
| 162.01~167.17 | 2483.5~2900.0 |               |
| 167.72~173.20 | 3260.0~3267.0 |               |

## 2.4 GHz 頻段測試紀錄結果

### 4 帶外發射之量測

#### 4.1 適用標準

請見本報告 3.1 節第 2 項(I)的規定。

#### 4.2 量測方法

在電波暗室，將待測物置於 0.8 米高的非金屬桌面，使其操作在工作狀態。接收天線置於 3 米距離。桌面要 360 度旋轉，另外接收天線從離地 1 米至 4 米升降變化，以找出最大的輻射電場強度，接收天線分別置於水平、垂直極化各執行測試一次。

備註: 對於 1GHz 以上場強輻射的測試，待測物則置於1.5米高的非金屬桌面

#### 4.3 量測儀器

For 2.4GHz 802.11b, 802.11n (HT40) above 1GHz test:

For 5GHz 802.11ac (VHT20), 802.11ac (VHT80) above 1GHz test:

| DESCRIPTION & MANUFACTURER                | MODEL NO.                | SERIAL NO.         | DATE OF CALIBRATION | DUE DATE OF CALIBRATION |
|-------------------------------------------|--------------------------|--------------------|---------------------|-------------------------|
| Test Receiver<br>Keysight                 | N9038A                   | MY54450088         | July 08, 2017       | July 07, 2018           |
| Horn_Antenna<br>SCHWARZBECK               | BBHA 9120D               | 9120D-783          | Dec. 27, 2016       | Dec. 26, 2017           |
| Pre-Amplifier<br>EMCI                     | EMC12630SE               | 980385             | Feb. 02, 2017       | Feb. 01, 2018           |
| RF Cable                                  | EMC104-SM-SM-1<br>200    | 160923             | Feb. 02, 2017       | Feb. 01, 2018           |
|                                           | EMC104-SM-SM-2<br>000    | 150318             | Mar. 29, 2017       | Mar. 28, 2018           |
|                                           | EMC104-SM-SM-5<br>000    | 150321             | Mar. 29, 2017       | Mar. 28, 2018           |
|                                           |                          |                    |                     |                         |
| Pre-Amplifier<br>EMCI                     | EMC184045SE              | 980387             | Feb. 02, 2017       | Feb. 01, 2018           |
| Horn_Antenna<br>SCHWARZBECK               | BBHA 9170                | BBHA9170608        | Dec. 15, 2016       | Dec. 14, 2017           |
| RF Cable                                  | SUCOFLEX 102             | 36432/2<br>36433/2 | Jan. 15, 2017       | Jan. 14, 2018           |
| Software                                  | ADT_Radiated_V8.<br>7.08 | NA                 | NA                  | NA                      |
| Antenna Tower & Turn<br>Table<br>Max-Full | MF-7802                  | MF780208410        | NA                  | NA                      |
| Boresight Antenna Fixture                 | FBA-01                   | FBA-SIP02          | NA                  | NA                      |

#### Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. \*The calibration interval of the above test instruments is 24 months and the calibrations are traceable to NML/ROC and NIST/USA.
3. The test was performed in 966 Chamber No. 4.
4. The CANADA Site Registration No. is 20331-2
5. Loop antenna was used for all emissions below 30 MHz.
6. The following table is for the measurement uncertainty, which is calculated as per the document CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

| Measurement                       | Value   |
|-----------------------------------|---------|
| Radiated emissions (1GHz ~6GHz)   | 5.16 dB |
| Radiated emissions (6GHz ~18GHz)  | 4.91 dB |
| Radiated emissions (18GHz ~40GHz) | 5.30 dB |

For 2.4GHz other above 1GHz test:

For 5GHz other above 1GHz (UNII-1 & UNII-3) test

| DESCRIPTION & MANUFACTURER             | MODEL NO.                                                   | SERIAL NO.                 | CALIBRATED DATE | CALIBRATED UNTIL |
|----------------------------------------|-------------------------------------------------------------|----------------------------|-----------------|------------------|
| Test Receiver<br>Keysight              | N9038A                                                      | MY54450088                 | July 20, 2016   | July 19, 2017    |
| Horn_Antenna<br>SCHWARZBECK            | BBHA 9120D                                                  | 9120D-783                  | Jan. 19, 2016   | Jan. 18, 2017    |
| Pre-Amplifier<br>Agilent               | 8449B                                                       | 3008A01922                 | Sep. 18, 2016   | Sep. 17, 2017    |
| RF Cable                               | EMC104-SM-SM-2000<br>EMC104-SM-SM-5000<br>EMC104-SM-SM-5000 | 150318<br>150323<br>150324 | Mar. 30, 2016   | Mar. 29, 2017    |
| Pre-Amplifier<br>EMCI                  | EMC184045                                                   | 980143                     | Jan. 15, 2016   | Jan. 14, 2017    |
| Horn_Antenna<br>SCHWARZBECK            | BBHA 9170                                                   | BBHA9170608                | Jan. 08, 2016   | Jan. 07, 2017    |
| RF Cable                               | SUCOFLEX 102                                                | 36432/2<br>36441/2         | Jan. 16, 2016   | Jan. 15, 2017    |
| Software                               | ADT_Radiated_V8.7.08                                        | NA                         | NA              | NA               |
| Antenna Tower & Turn Table<br>Max-Full | MF-7802                                                     | MF780208410                | NA              | NA               |
| Boresight Antenna Fixture              | FBA-01                                                      | FBA-SIP02                  | NA              | NA               |
| Spectrum Analyzer<br>R&S               | FSP40                                                       | 100060                     | May 11, 2016    | May 10, 2017     |
| Power meter<br>Anritsu                 | ML2495A                                                     | 1014008                    | May 5, 2016     | May 4, 2017      |
| Power sensor<br>Anritsu                | MA2411B                                                     | 0917122                    | May 5, 2016     | May 4, 2017      |

**Note:**

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in 966 Chamber No. 4.
3. The CANADA Site Registration No. is 20331-2
4. The following table is for the measurement uncertainty, which is calculated as per the document CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

| Measurement                       | Value   |
|-----------------------------------|---------|
| Radiated emissions (1GHz ~6GHz)   | 3.43 dB |
| Radiated emissions (6GHz ~18GHz)  | 3.49 dB |
| Radiated emissions (18GHz ~40GHz) | 4.11 dB |

**For 5GHz other above 1GHz (UNII-2A & UNII-2C) test**

| DESCRIPTION & MANUFACTURER                       | MODEL NO.                                                   | SERIAL NO.                 | CALIBRATED DATE | CALIBRATED UNTIL |
|--------------------------------------------------|-------------------------------------------------------------|----------------------------|-----------------|------------------|
| Test Receiver<br>Keysight                        | N9038A                                                      | MY54450088                 | July 20, 2016   | July 19, 2017    |
| Horn_Antenna<br>SCHWARZBECK                      | BBHA 9120D                                                  | 9120D-783                  | Jan. 19, 2016   | Jan. 18, 2017    |
| Pre-Amplifier<br>Agilent                         | 8449B                                                       | 3008A01922                 | Sep. 18, 2016   | Sep. 17, 2017    |
| RF Cable                                         | EMC104-SM-SM-2000<br>EMC104-SM-SM-5000<br>EMC104-SM-SM-5000 | 150318<br>150323<br>150324 | Mar. 30, 2016   | Mar. 29, 2017    |
| Pre-Amplifier<br>EMCI                            | EMC184045                                                   | 980143                     | Jan. 15, 2016   | Jan. 14, 2017    |
| Horn_Antenna<br>SCHWARZBECK                      | BBHA 9170                                                   | BBHA9170608                | Jan. 08, 2016   | Jan. 07, 2017    |
| RF Cable                                         | SUCOFLEX 102                                                | 36432/2<br>36441/2         | Jan. 16, 2016   | Jan. 15, 2017    |
| Software                                         | ADT_Radiated_V8.7.08                                        | NA                         | NA              | NA               |
| Antenna Tower & Turn Table<br>Max-Full           | MF-7802                                                     | MF780208410                | NA              | NA               |
| Boresight Antenna Fixture                        | FBA-01                                                      | FBA-SIP02                  | NA              | NA               |
| Spectrum Analyzer<br>R&S                         | FSv40                                                       | 100964                     | June 28, 2016   | June 27, 2017    |
| Power meter<br>Anritsu                           | ML2495A                                                     | 1014008                    | May 5, 2016     | May 4, 2017      |
| Power sensor<br>Anritsu                          | MA2411B                                                     | 0917122                    | May 5, 2016     | May 4, 2017      |
| AC Power Source<br>Extech Electronics            | 6205                                                        | 1440452                    | NA              | NA               |
| Temperature & Humidity<br>Chamber<br>Giant Force | GTH-150-40-SP-AR                                            | MAA0812-008                | Jan. 15, 2016   | Jan. 14, 2017    |
| Digital Multimeter<br>FLUKE                      | 87III                                                       | 73680266                   | Nov. 10, 2016   | Nov. 09, 2017    |

**Note:**

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in 966 Chamber No. 4.
3. The CANADA Site Registration No. is 20331-2
4. The following table is for the measurement uncertainty, which is calculated as per the document CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

| Measurement                       | Value   |
|-----------------------------------|---------|
| Radiated emissions (1GHz ~6GHz)   | 3.43 dB |
| Radiated emissions (6GHz ~18GHz)  | 3.49 dB |
| Radiated emissions (18GHz ~40GHz) | 4.11 dB |

For 2.4GHz below 1GHz test:

For 5GHz below 1GHz test:

| DESCRIPTION & MANUFACTURER                     | MODEL NO.            | SERIAL NO.                    | DATE OF CALIBRATION | DUE DATE OF CALIBRATION |
|------------------------------------------------|----------------------|-------------------------------|---------------------|-------------------------|
| Test Receiver<br>Agilent                       | N9038A               | MY50010156                    | July 12, 2017       | July 11, 2018           |
| Pre-Amplifier <sup>(*)</sup><br>EMCI           | EMC001340            | 980142                        | Jan. 20, 2016       | Jan. 19, 2018           |
| Loop Antenna <sup>(*)</sup><br>Electro-Metrics | EM-6879              | 264                           | Dec. 16, 2016       | Dec. 15, 2018           |
| RF Cable                                       | NA                   | LOOPCAB-001<br>LOOPCAB-002    | Jan. 17, 2017       | Jan. 16, 2018           |
| Pre-Amplifier<br>Mini-Circuits                 | ZFL-1000VH2B         | AMP-ZFL-05                    | May 06, 2017        | May 05, 2018            |
| Trilog Broadband<br>Antenna<br>SCHWARZBECK     | VULB 9168            | 9168-361                      | Dec. 29, 2016       | Dec. 28, 2017           |
| RF Cable                                       | 8D                   | 966-3-1<br>966-3-2<br>966-3-3 | Apr. 01, 2017       | Mar. 31, 2018           |
| Fixed attenuator<br>Mini-Circuits              | UNAT-5+              | PAD-3m-3-01                   | Oct. 03, 2017       | Oct. 02, 2018           |
| Software                                       | ADT_Radiated_V8.7.08 | NA                            | NA                  | NA                      |
| Antenna Tower & Turn<br>Table<br>Max-Full      | MF-7802              | MF780208406                   | NA                  | NA                      |


**Note:**

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. \*The calibration interval of the above test instruments is 24 months and the calibrations are traceable to NML/ROC and NIST/USA.
3. The test was performed in 966 Chamber No. 3.
4. The CANADA Site Registration No. is 20331-1
5. Loop antenna was used for all emissions below 30 MHz.
6. The following table is for the measurement uncertainty, which is calculated as per the document CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.


| Measurement                     | Value   |
|---------------------------------|---------|
| Radiated emissions (30MHz-1GHz) | 5.32 dB |

#### 4.4 測試配置

##### <Frequency Range below 1GHz>

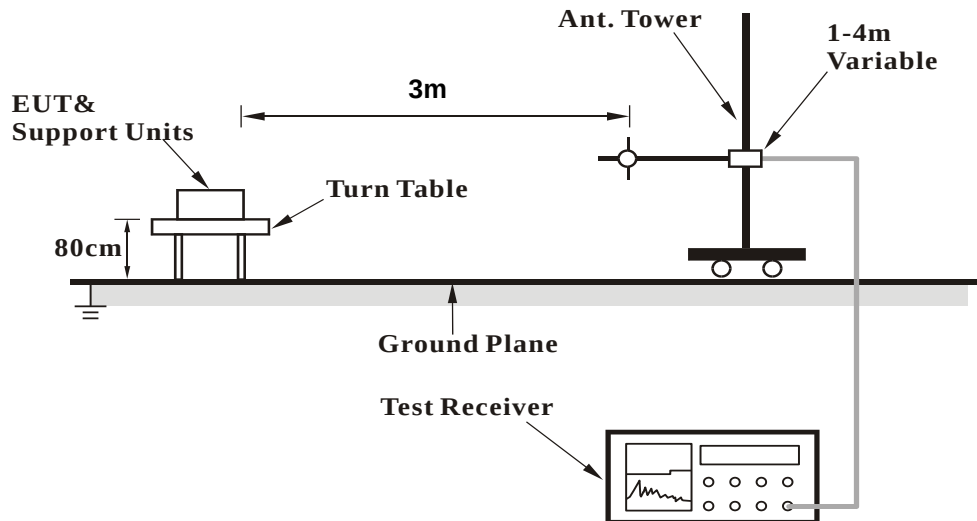

##### <Frequency Range above 1GHz>

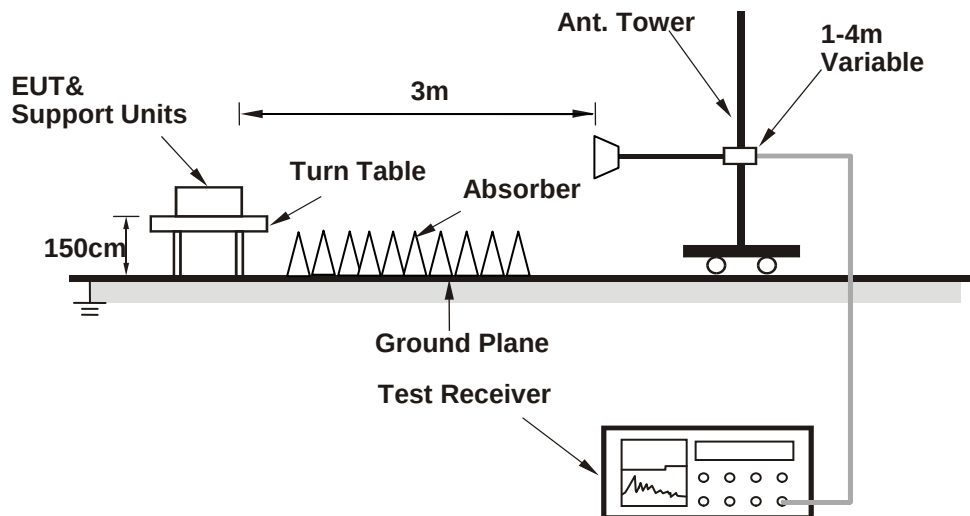

#### 4.5 場強度之計算

場強之計算公式如下：

結果值 Emission level (dBuV/m)=機器讀值 Raw Value (dBuV) +校正因子 Correction Factor (dB/m)

餘裕度 Margin(dB)= 結果值 Emission level (dBuV/m)-限制值 Limit value (dBuV/m)

量測結果請見下頁。

#### 4.6 量測結果

##### 4.6.1 發射諧波


##### 802.11b

|         |                 |         |                                                |
|---------|-----------------|---------|------------------------------------------------|
| 操作模式：   | 發射              | 調變技術：   | DSSS                                           |
| 基本波頻率：  | CH 1：2412 MHz   | 測試儀器：   | (PK) RB=1MHz, VB=3MHz<br>(AV) RB=1MHz, VB=10Hz |
| 量測場地溫度： | 22°C            | 量測場地濕度： | 64%RH                                          |
| 測試日期：   | 106 年 10 月 27 日 | 測試者：    | 陳志毅                                            |

| ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M |             |                         |                |             |                    |                      |                  |                          |
|-----------------------------------------------------|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| NO.                                                 | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
| 1                                                   | 2390.00     | 57.7 PK                 | 74.0           | -16.3       | 1.11 H             | 115                  | 59.0             | -1.3                     |
| 2                                                   | 2390.00     | 46.0 AV                 | 54.0           | -8.0        | 1.11 H             | 115                  | 47.3             | -1.3                     |
| 3                                                   | *2412.00    | 107.8 PK                |                |             | 1.11 H             | 115                  | 108.9            | -1.1                     |
| 4                                                   | *2412.00    | 105.6 AV                |                |             | 1.11 H             | 115                  | 106.7            | -1.1                     |
| 5                                                   | 4824.00     | 43.1 PK                 | 74.0           | -30.9       | 1.10 H             | 88                   | 39.9             | 3.2                      |
| 6                                                   | 4824.00     | 39.1 AV                 | 54.0           | -14.9       | 1.10 H             | 88                   | 35.9             | 3.2                      |
| 7                                                   | #7236.00    | -                       | -              | -           | -                  | -                    | -                | -                        |
| 8                                                   | #9648.00    | -                       | -              | -           | -                  | -                    | -                | -                        |
| 9                                                   | 12060.00    | -                       | -              | -           | -                  | -                    | -                | -                        |
| 10                                                  | 14472.00    | -                       | -              | -           | -                  | -                    | -                | -                        |
| 11                                                  | #16884.00   | -                       | -              | -           | -                  | -                    | -                | -                        |
| 12                                                  | 19296.00    | -                       | -              | -           | -                  | -                    | -                | -                        |
| 13                                                  | #21708.00   | -                       | -              | -           | -                  | -                    | -                | -                        |
| 14                                                  | #24120.00   | -                       | -              | -           | -                  | -                    | -                | -                        |

#### REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

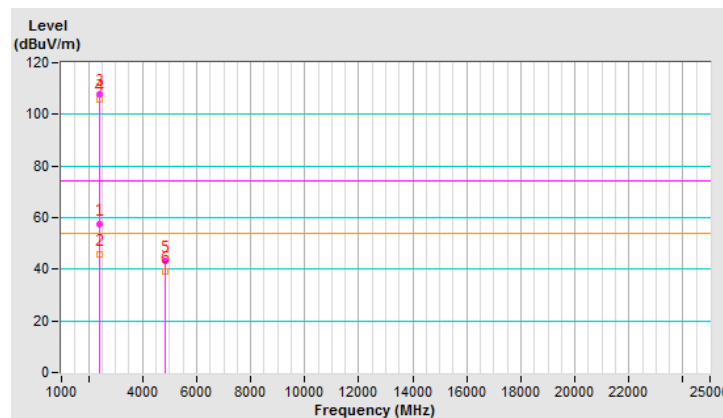


|         |                 |         |                                                |
|---------|-----------------|---------|------------------------------------------------|
| 操作模式：   | 發射              | 調變技術：   | DSSS                                           |
| 基本波頻率：  | CH 1：2412 MHz   | 測試儀器：   | (PK) RB=1MHz, VB=3MHz<br>(AV) RB=1MHz, VB=10Hz |
| 量測場地溫度： | 22°C            | 量測場地濕度： | 64%RH                                          |
| 測試日期：   | 106 年 10 月 27 日 | 測試者：    | 陳志毅                                            |

| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M |             |                         |                |             |                    |                      |                  |                          |
|---------------------------------------------------|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| NO.                                               | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
| 1                                                 | 2390.00     | 65.2 PK                 | 74.0           | -8.8        | 1.74 V             | 180                  | 66.5             | -1.3                     |
| 2                                                 | 2390.00     | 53.9 AV                 | 54.0           | -0.1        | 1.74 V             | 180                  | 55.2             | -1.3                     |
| 3                                                 | *2412.00    | 116.5 PK                |                |             | 1.74 V             | 180                  | 117.6            | -1.1                     |
| 4                                                 | *2412.00    | 114.2 AV                |                |             | 1.74 V             | 180                  | 115.3            | -1.1                     |
| 5                                                 | 4824.00     | 42.8 PK                 | 74.0           | -31.2       | 1.70 V             | 202                  | 39.6             | 3.2                      |
| 6                                                 | 4824.00     | 39.0 AV                 | 54.0           | -15.0       | 1.70 V             | 202                  | 35.8             | 3.2                      |
| 7                                                 | #7236.00    | -                       | -              | -           | -                  | -                    | -                | -                        |
| 8                                                 | #9648.00    | -                       | -              | -           | -                  | -                    | -                | -                        |
| 9                                                 | 12060.00    | -                       | -              | -           | -                  | -                    | -                | -                        |
| 10                                                | 14472.00    | -                       | -              | -           | -                  | -                    | -                | -                        |
| 11                                                | #16884.00   | -                       | -              | -           | -                  | -                    | -                | -                        |
| 12                                                | 19296.00    | -                       | -              | -           | -                  | -                    | -                | -                        |
| 13                                                | #21708.00   | -                       | -              | -           | -                  | -                    | -                | -                        |
| 14                                                | #24120.00   | -                       | -              | -           | -                  | -                    | -                | -                        |

#### REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

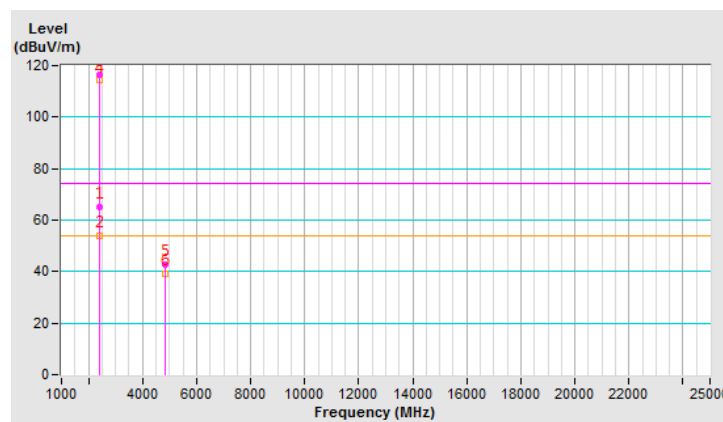


|         |                 |         |                                                |
|---------|-----------------|---------|------------------------------------------------|
| 操作模式：   | 發射              | 調變技術：   | DSSS                                           |
| 基本波頻率：  | CH 6：2437 MHz   | 測試儀器：   | (PK) RB=1MHz, VB=3MHz<br>(AV) RB=1MHz, VB=10Hz |
| 量測場地溫度： | 22°C            | 量測場地濕度： | 64%RH                                          |
| 測試日期：   | 106 年 10 月 27 日 | 測試者：    | 陳志毅                                            |

| ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M |             |                         |                |             |                    |                      |                  |                          |
|-----------------------------------------------------|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| NO.                                                 | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
| 1                                                   | 2319.00     | 56.2 PK                 | 74.0           | -17.8       | 1.09 H             | 125                  | 57.8             | -1.6                     |
| 2                                                   | 2319.00     | 46.0 AV                 | 54.0           | -8.0        | 1.09 H             | 125                  | 47.6             | -1.6                     |
| 3                                                   | *2437.00    | 112.2 PK                |                |             | 1.09 H             | 125                  | 113.4            | -1.2                     |
| 4                                                   | *2437.00    | 109.9 AV                |                |             | 1.09 H             | 125                  | 111.1            | -1.2                     |
| 5                                                   | 2500.00     | 56.1 PK                 | 74.0           | -17.9       | 1.09 H             | 125                  | 57.0             | -0.9                     |
| 6                                                   | 2500.00     | 47.7 AV                 | 54.0           | -6.3        | 1.09 H             | 125                  | 48.6             | -0.9                     |
| 7                                                   | 4874.00     | 44.2 PK                 | 74.0           | -29.8       | 1.10 H             | 77                   | 40.9             | 3.3                      |
| 8                                                   | 4874.00     | 40.3 AV                 | 54.0           | -13.7       | 1.10 H             | 77                   | 37.0             | 3.3                      |
| 9                                                   | 7311.00     | 45.7 PK                 | 74.0           | -28.3       | 1.22 H             | 246                  | 35.9             | 9.8                      |
| 10                                                  | 7311.00     | 36.3 AV                 | 54.0           | -17.7       | 1.22 H             | 246                  | 26.5             | 9.8                      |
| 11                                                  | #9748.00    | -                       | -              | -           | -                  | -                    | -                | -                        |
| 12                                                  | 12185.00    | -                       | -              | -           | -                  | -                    | -                | -                        |
| 13                                                  | #14622.00   | -                       | -              | -           | -                  | -                    | -                | -                        |
| 14                                                  | #17059.00   | -                       | -              | -           | -                  | -                    | -                | -                        |
| 15                                                  | 19496.00    | -                       | -              | -           | -                  | -                    | -                | -                        |
| 16                                                  | #21933.00   | -                       | -              | -           | -                  | -                    | -                | -                        |
| 17                                                  | #24370.00   | -                       | -              | -           | -                  | -                    | -                | -                        |

#### REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

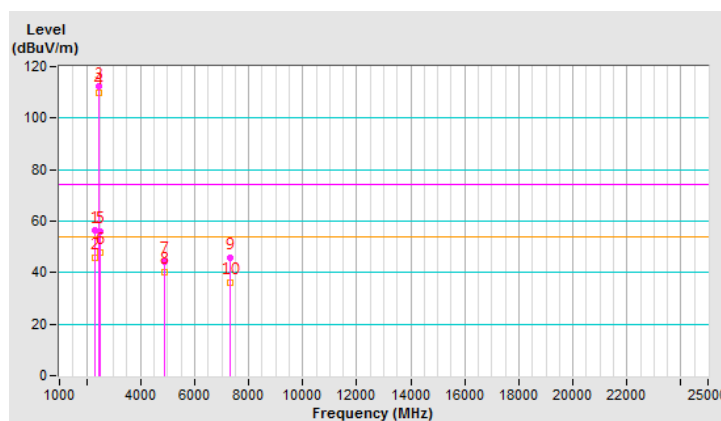


|         |                 |         |                                                |
|---------|-----------------|---------|------------------------------------------------|
| 操作模式：   | 發射              | 調變技術：   | DSSS                                           |
| 基本波頻率：  | CH 6：2437 MHz   | 測試儀器：   | (PK) RB=1MHz, VB=3MHz<br>(AV) RB=1MHz, VB=10Hz |
| 量測場地溫度： | 22°C            | 量測場地濕度： | 64%RH                                          |
| 測試日期：   | 106 年 10 月 27 日 | 測試者：    | 陳志毅                                            |

| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M |                |                               |                   |                |                          |                            |                        |                                |
|---------------------------------------------------|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| NO.                                               | FREQ.<br>(MHz) | EMISSION<br>LEVEL<br>(dBuV/m) | LIMIT<br>(dBuV/m) | MARGIN<br>(dB) | ANTENNA<br>HEIGHT<br>(m) | TABLE<br>ANGLE<br>(Degree) | RAW<br>VALUE<br>(dBuV) | CORRECTION<br>FACTOR<br>(dB/m) |
| 1                                                 | 2319.00        | 63.7 PK                       | 74.0              | -10.3          | 1.72 V                   | 178                        | 65.3                   | -1.6                           |
| 2                                                 | 2319.00        | 53.9 AV                       | 54.0              | -0.1           | 1.72 V                   | 178                        | 55.5                   | -1.6                           |
| 3                                                 | *2437.00       | 120.9 PK                      |                   |                | 1.72 V                   | 178                        | 122.1                  | -1.2                           |
| 4                                                 | *2437.00       | 118.5 AV                      |                   |                | 1.72 V                   | 178                        | 119.7                  | -1.2                           |
| 5                                                 | 2500.00        | 61.6 PK                       | 74.0              | -12.4          | 1.72 V                   | 178                        | 62.5                   | -0.9                           |
| 6                                                 | 2500.00        | 53.6 AV                       | 54.0              | -0.4           | 1.72 V                   | 178                        | 54.5                   | -0.9                           |
| 7                                                 | 4874.00        | 48.5 PK                       | 74.0              | -25.5          | 1.56 V                   | 189                        | 45.2                   | 3.3                            |
| 8                                                 | 4874.00        | 46.4 AV                       | 54.0              | -7.6           | 1.56 V                   | 189                        | 43.1                   | 3.3                            |
| 9                                                 | 7311.00        | 45.6 PK                       | 74.0              | -28.4          | 1.33 V                   | 218                        | 35.8                   | 9.8                            |
| 10                                                | 7311.00        | 36.2 AV                       | 54.0              | -17.8          | 1.33 V                   | 218                        | 26.4                   | 9.8                            |
| 11                                                | #9748.00       | -                             | -                 | -              | -                        | -                          | -                      | -                              |
| 12                                                | 12185.00       | -                             | -                 | -              | -                        | -                          | -                      | -                              |
| 13                                                | #14622.00      | -                             | -                 | -              | -                        | -                          | -                      | -                              |
| 14                                                | #17059.00      | -                             | -                 | -              | -                        | -                          | -                      | -                              |
| 15                                                | 19496.00       | -                             | -                 | -              | -                        | -                          | -                      | -                              |
| 16                                                | #21933.00      | -                             | -                 | -              | -                        | -                          | -                      | -                              |
| 17                                                | #24370.00      | -                             | -                 | -              | -                        | -                          | -                      | -                              |

#### REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

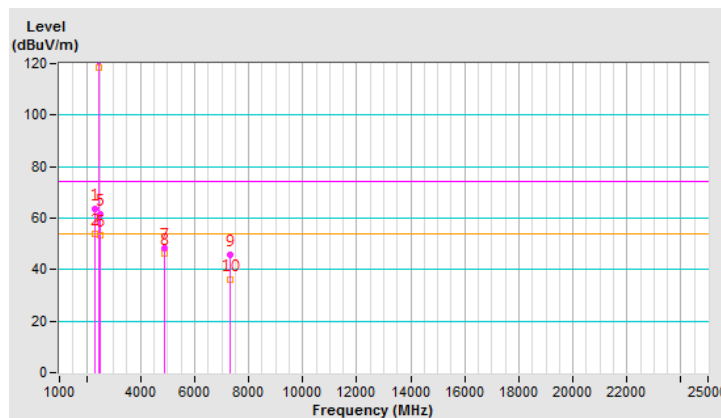


|         |                 |         |                                                |
|---------|-----------------|---------|------------------------------------------------|
| 操作模式：   | 發射              | 調變技術：   | DSSS                                           |
| 基本波頻率：  | CH 11：2462 MHz  | 測試儀器：   | (PK) RB=1MHz, VB=3MHz<br>(AV) RB=1MHz, VB=10Hz |
| 量測場地溫度： | 22°C            | 量測場地濕度： | 64%RH                                          |
| 測試日期：   | 106 年 10 月 27 日 | 測試者：    | 陳志毅                                            |

| ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M |             |                         |                |             |                    |                      |                  |                          |
|-----------------------------------------------------|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| NO.                                                 | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
| 1                                                   | *2462.00    | 110.1 PK                |                |             | 1.10 H             | 118                  | 111.2            | -1.1                     |
| 2                                                   | *2462.00    | 107.9 AV                |                |             | 1.10 H             | 118                  | 109.0            | -1.1                     |
| 3                                                   | 2500.00     | 57.8 PK                 | 74.0           | -16.2       | 1.10 H             | 118                  | 58.7             | -0.9                     |
| 4                                                   | 2500.00     | 47.6 AV                 | 54.0           | -6.4        | 1.10 H             | 118                  | 48.5             | -0.9                     |
| 5                                                   | 4924.00     | 43.2 PK                 | 74.0           | -30.8       | 1.12 H             | 88                   | 39.7             | 3.5                      |
| 6                                                   | 4924.00     | 38.9 AV                 | 54.0           | -15.1       | 1.12 H             | 88                   | 35.4             | 3.5                      |
| 7                                                   | 7386.00     | 45.2 PK                 | 74.0           | -28.8       | 1.27 H             | 261                  | 35.3             | 9.9                      |
| 8                                                   | 7386.00     | 36.1 AV                 | 54.0           | -17.9       | 1.27 H             | 261                  | 26.2             | 9.9                      |
| 9                                                   | #9848.00    | -                       | -              | -           | -                  | -                    | -                | -                        |
| 10                                                  | 12310.00    | -                       | -              | -           | -                  | -                    | -                | -                        |
| 11                                                  | #14772.00   | -                       | -              | -           | -                  | -                    | -                | -                        |
| 12                                                  | #17234.00   | -                       | -              | -           | -                  | -                    | -                | -                        |
| 13                                                  | 19696.00    | -                       | -              | -           | -                  | -                    | -                | -                        |
| 14                                                  | 22158.00    | -                       | -              | -           | -                  | -                    | -                | -                        |
| 15                                                  | #24620.00   | -                       | -              | -           | -                  | -                    | -                | -                        |

#### REMARKS:

- Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
- Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
- The other emission levels were very low against the limit.
- Margin value = Emission Level – Limit value
- " \* ": Fundamental frequency (主頻).
- " # ": The radiated frequency is out of the restricted band.
- " - ": The emission levels were too low to be detected.
- The blank is not available, the limit of fundamental frequency was restricted at the output power.

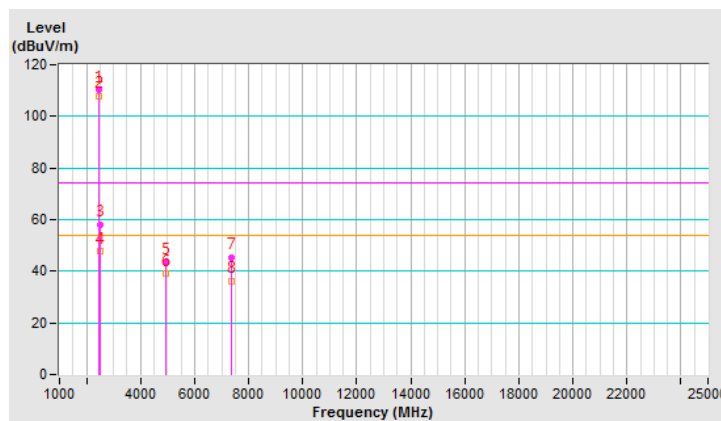


|         |                 |         |                                                |
|---------|-----------------|---------|------------------------------------------------|
| 操作模式：   | 發射              | 調變技術：   | DSSS                                           |
| 基本波頻率：  | CH 11：2462 MHz  | 測試儀器：   | (PK) RB=1MHz, VB=3MHz<br>(AV) RB=1MHz, VB=10Hz |
| 量測場地溫度： | 22°C            | 量測場地濕度： | 64%RH                                          |
| 測試日期：   | 106 年 10 月 27 日 | 測試者：    | 陳志毅                                            |

| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M |             |                         |                |             |                    |                      |                  |                          |
|---------------------------------------------------|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| NO.                                               | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
| 1                                                 | *2462.00    | 118.8 PK                |                |             | 1.70 V             | 181                  | 119.9            | -1.1                     |
| 2                                                 | *2462.00    | 116.5 AV                |                |             | 1.70 V             | 181                  | 117.6            | -1.1                     |
| 3                                                 | 2500.00     | 63.3 PK                 | 74.0           | -10.7       | 1.70 V             | 181                  | 64.2             | -0.9                     |
| 4                                                 | 2500.00     | 53.5 AV                 | 54.0           | -0.5        | 1.70 V             | 181                  | 54.4             | -0.9                     |
| 5                                                 | 4924.00     | 43.1 PK                 | 74.0           | -30.9       | 1.72 V             | 206                  | 39.6             | 3.5                      |
| 6                                                 | 4924.00     | 39.1 AV                 | 54.0           | -14.9       | 1.72 V             | 206                  | 35.6             | 3.5                      |
| 7                                                 | 7386.00     | 45.2 PK                 | 74.0           | -28.8       | 1.34 V             | 208                  | 35.3             | 9.9                      |
| 8                                                 | 7386.00     | 35.8 AV                 | 54.0           | -18.2       | 1.34 V             | 208                  | 25.9             | 9.9                      |
| 9                                                 | #9848.00    | -                       | -              | -           | -                  | -                    | -                | -                        |
| 10                                                | 12310.00    | -                       | -              | -           | -                  | -                    | -                | -                        |
| 11                                                | #14772.00   | -                       | -              | -           | -                  | -                    | -                | -                        |
| 12                                                | #17234.00   | -                       | -              | -           | -                  | -                    | -                | -                        |
| 13                                                | 19696.00    | -                       | -              | -           | -                  | -                    | -                | -                        |
| 14                                                | 22158.00    | -                       | -              | -           | -                  | -                    | -                | -                        |
| 15                                                | #24620.00   | -                       | -              | -           | -                  | -                    | -                | -                        |

#### REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

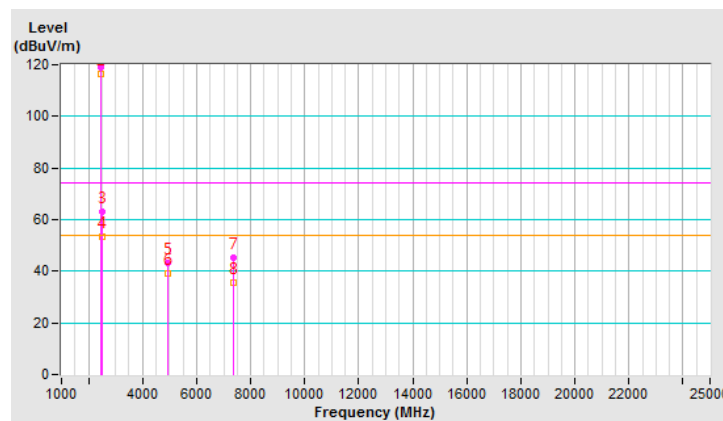

## 802.11g


|         |                |         |                                                |
|---------|----------------|---------|------------------------------------------------|
| 操作模式：   | 發射             | 調變技術：   | OFDM                                           |
| 基本波頻率：  | CH 1：2412 MHz  | 測試儀器：   | (PK) RB=1MHz, VB=3MHz<br>(AV) RB=1MHz, VB=10Hz |
| 量測場地溫度： | 22°C           | 量測場地濕度： | 70%RH                                          |
| 測試日期：   | 105 年 10 月 7 日 | 測試者：    | 鄭樹營                                            |

## ANTENNA POLARITY &amp; TEST DISTANCE: HORIZONTAL AT 3 M

| NO. | FREQ.<br>(MHz) | EMISSION<br>LEVEL<br>(dBuV/m) | LIMIT<br>(dBuV/m) | MARGIN<br>(dB) | ANTENNA<br>HEIGHT<br>(m) | TABLE<br>ANGLE<br>(Degree) | RAW<br>VALUE<br>(dBuV) | CORRECTION<br>FACTOR<br>(dB/m) |
|-----|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| 1   | 2390.00        | 60.8 PK                       | 74.0              | -13.2          | 1.03 H                   | 108                        | 66.5                   | -5.7                           |
| 2   | 2390.00        | 47.7 AV                       | 54.0              | -6.3           | 1.03 H                   | 108                        | 53.4                   | -5.7                           |
| 3   | *2412.00       | 104.9 PK                      |                   |                | 1.03 H                   | 108                        | 110.5                  | -5.6                           |
| 4   | *2412.00       | 95.8 AV                       |                   |                | 1.03 H                   | 108                        | 101.4                  | -5.6                           |
| 5   | 4824.00        | 45.4 PK                       | 74.0              | -28.6          | 3.24 H                   | 62                         | 44.6                   | 0.8                            |
| 6   | 4824.00        | 31.6 AV                       | 54.0              | -22.4          | 3.24 H                   | 62                         | 30.8                   | 0.8                            |
| 7   | #7236.00       | -                             | -                 | -              | -                        | -                          | -                      | -                              |
| 8   | #9648.00       | -                             | -                 | -              | -                        | -                          | -                      | -                              |
| 9   | 12060.00       | -                             | -                 | -              | -                        | -                          | -                      | -                              |
| 10  | 14472.00       | -                             | -                 | -              | -                        | -                          | -                      | -                              |
| 11  | #16884.00      | -                             | -                 | -              | -                        | -                          | -                      | -                              |
| 12  | 19296.00       | -                             | -                 | -              | -                        | -                          | -                      | -                              |
| 13  | #21708.00      | -                             | -                 | -              | -                        | -                          | -                      | -                              |
| 14  | #24120.00      | -                             | -                 | -              | -                        | -                          | -                      | -                              |

## REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

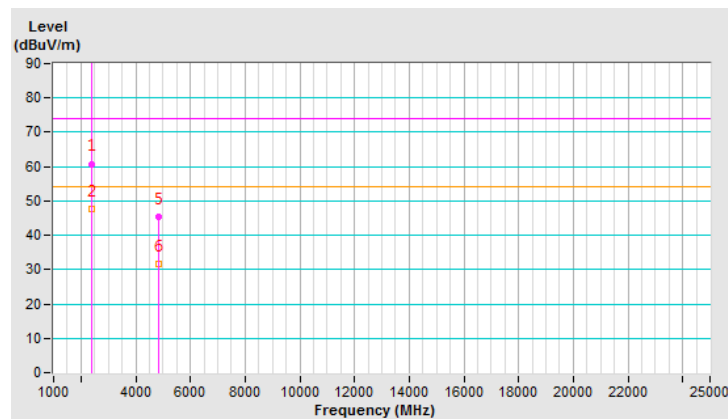


|         |                |         |                                                |
|---------|----------------|---------|------------------------------------------------|
| 操作模式：   | 發射             | 調變技術：   | OFDM                                           |
| 基本波頻率：  | CH 1：2412 MHz  | 測試儀器：   | (PK) RB=1MHz, VB=3MHz<br>(AV) RB=1MHz, VB=10Hz |
| 量測場地溫度： | 22°C           | 量測場地濕度： | 70%RH                                          |
| 測試日期：   | 105 年 10 月 7 日 | 測試者：    | 鄭樹營                                            |

| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M |             |                         |                |             |                    |                      |                  |                          |
|---------------------------------------------------|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| NO.                                               | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
| 1                                                 | 2390.00     | 69.5 PK                 | 74.0           | -4.5        | 2.20 V             | 360                  | 75.2             | -5.7                     |
| 2                                                 | 2390.00     | 53.9 AV                 | 54.0           | -0.1        | 2.20 V             | 360                  | 59.6             | -5.7                     |
| 3                                                 | *2412.00    | 114.4 PK                |                |             | 2.20 V             | 360                  | 120.0            | -5.6                     |
| 4                                                 | *2412.00    | 104.5 AV                |                |             | 2.20 V             | 360                  | 110.1            | -5.6                     |
| 5                                                 | 4824.00     | 53.1 PK                 | 74.0           | -20.9       | 1.57 V             | 360                  | 52.3             | 0.8                      |
| 6                                                 | 4824.00     | 39.3 AV                 | 54.0           | -14.7       | 1.57 V             | 360                  | 38.5             | 0.8                      |
| 7                                                 | #7236.00    | -                       | -              | -           | -                  | -                    | -                | -                        |
| 8                                                 | #9648.00    | -                       | -              | -           | -                  | -                    | -                | -                        |
| 9                                                 | 12060.00    | -                       | -              | -           | -                  | -                    | -                | -                        |
| 10                                                | 14472.00    | -                       | -              | -           | -                  | -                    | -                | -                        |
| 11                                                | #16884.00   | -                       | -              | -           | -                  | -                    | -                | -                        |
| 12                                                | 19296.00    | -                       | -              | -           | -                  | -                    | -                | -                        |
| 13                                                | #21708.00   | -                       | -              | -           | -                  | -                    | -                | -                        |
| 14                                                | #24120.00   | -                       | -              | -           | -                  | -                    | -                | -                        |

#### REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

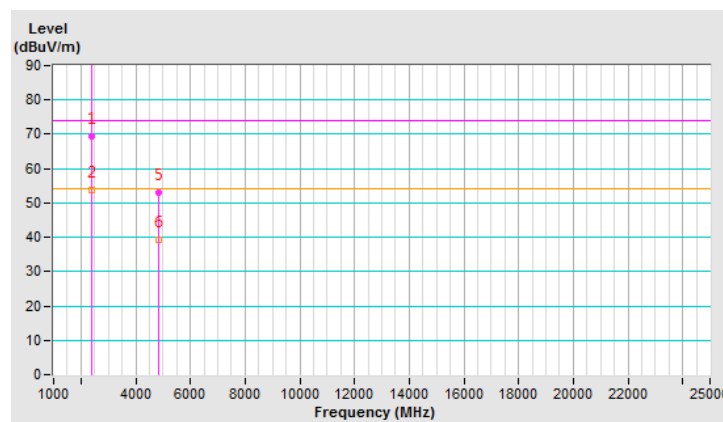


|         |                |         |                                                |
|---------|----------------|---------|------------------------------------------------|
| 操作模式：   | 發射             | 調變技術：   | OFDM                                           |
| 基本波頻率：  | CH 6：2437 MHz  | 測試儀器：   | (PK) RB=1MHz, VB=3MHz<br>(AV) RB=1MHz, VB=10Hz |
| 量測場地溫度： | 22°C           | 量測場地濕度： | 70%RH                                          |
| 測試日期：   | 105 年 10 月 7 日 | 測試者：    | 鄭樹營                                            |

| ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M |                |                               |                   |                |                          |                            |                        |                                |
|-----------------------------------------------------|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| NO.                                                 | FREQ.<br>(MHz) | EMISSION<br>LEVEL<br>(dBuV/m) | LIMIT<br>(dBuV/m) | MARGIN<br>(dB) | ANTENNA<br>HEIGHT<br>(m) | TABLE<br>ANGLE<br>(Degree) | RAW<br>VALUE<br>(dBuV) | CORRECTION<br>FACTOR<br>(dB/m) |
| 1                                                   | 2390.00        | 59.2 PK                       | 74.0              | -14.8          | 1.03 H                   | 102                        | 64.9                   | -5.7                           |
| 2                                                   | 2390.00        | 44.2 AV                       | 54.0              | -9.8           | 1.03 H                   | 102                        | 49.9                   | -5.7                           |
| 3                                                   | *2437.00       | 110.2 PK                      |                   |                | 1.03 H                   | 102                        | 115.7                  | -5.5                           |
| 4                                                   | *2437.00       | 100.9 AV                      |                   |                | 1.03 H                   | 102                        | 106.4                  | -5.5                           |
| 5                                                   | 2483.50        | 57.2 PK                       | 74.0              | -16.8          | 1.03 H                   | 102                        | 62.7                   | -5.5                           |
| 6                                                   | 2483.50        | 42.1 AV                       | 54.0              | -11.9          | 1.03 H                   | 102                        | 47.6                   | -5.5                           |
| 7                                                   | 4874.00        | 51.1 PK                       | 74.0              | -22.9          | 3.19 H                   | 73                         | 50.2                   | 0.9                            |
| 8                                                   | 4874.00        | 37.1 AV                       | 54.0              | -16.9          | 3.19 H                   | 73                         | 36.2                   | 0.9                            |
| 9                                                   | 7311.00        | 49.3 PK                       | 74.0              | -24.7          | 1.17 H                   | 238                        | 41.9                   | 7.4                            |
| 10                                                  | 7311.00        | 37.5 AV                       | 54.0              | -16.5          | 1.17 H                   | 238                        | 30.1                   | 7.4                            |
| 11                                                  | #9748.00       | -                             | -                 | -              | -                        | -                          | -                      | -                              |
| 12                                                  | 12185.00       | -                             | -                 | -              | -                        | -                          | -                      | -                              |
| 13                                                  | #14622.00      | -                             | -                 | -              | -                        | -                          | -                      | -                              |
| 14                                                  | #17059.00      | -                             | -                 | -              | -                        | -                          | -                      | -                              |
| 15                                                  | 19496.00       | -                             | -                 | -              | -                        | -                          | -                      | -                              |
| 16                                                  | #21933.00      | -                             | -                 | -              | -                        | -                          | -                      | -                              |
| 17                                                  | #24370.00      | -                             | -                 | -              | -                        | -                          | -                      | -                              |

#### REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

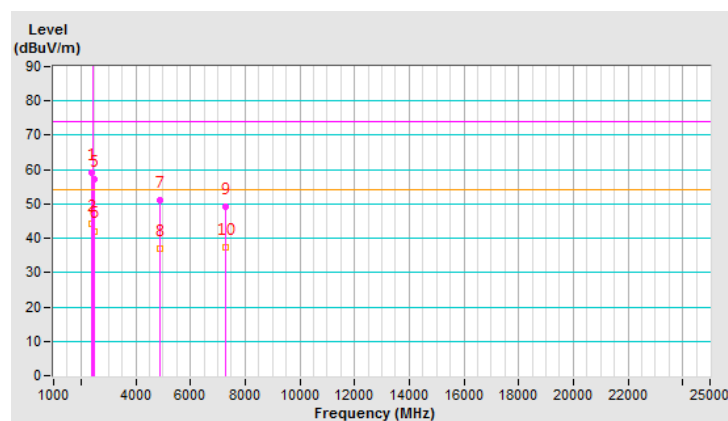


|         |                |         |                                                |
|---------|----------------|---------|------------------------------------------------|
| 操作模式：   | 發射             | 調變技術：   | OFDM                                           |
| 基本波頻率：  | CH 6：2437 MHz  | 測試儀器：   | (PK) RB=1MHz, VB=3MHz<br>(AV) RB=1MHz, VB=10Hz |
| 量測場地溫度： | 22°C           | 量測場地濕度： | 70%RH                                          |
| 測試日期：   | 105 年 10 月 7 日 | 測試者：    | 鄭樹營                                            |

| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M |                |                               |                   |                |                          |                            |                        |                                |
|---------------------------------------------------|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| NO.                                               | FREQ.<br>(MHz) | EMISSION<br>LEVEL<br>(dBuV/m) | LIMIT<br>(dBuV/m) | MARGIN<br>(dB) | ANTENNA<br>HEIGHT<br>(m) | TABLE<br>ANGLE<br>(Degree) | RAW<br>VALUE<br>(dBuV) | CORRECTION<br>FACTOR<br>(dB/m) |
| 1                                                 | 2390.00        | 67.1 PK                       | 74.0              | -6.9           | 1.50 V                   | 166                        | 72.8                   | -5.7                           |
| 2                                                 | 2390.00        | 51.2 AV                       | 54.0              | -2.8           | 1.50 V                   | 166                        | 56.9                   | -5.7                           |
| 3                                                 | *2437.00       | 119.5 PK                      |                   |                | 1.50 V                   | 166                        | 125.0                  | -5.5                           |
| 4                                                 | *2437.00       | 109.6 AV                      |                   |                | 1.50 V                   | 166                        | 115.1                  | -5.5                           |
| 5                                                 | 2483.50        | 64.9 PK                       | 74.0              | -9.1           | 1.50 V                   | 166                        | 70.4                   | -5.5                           |
| 6                                                 | 2483.50        | 49.3 AV                       | 54.0              | -4.7           | 1.50 V                   | 166                        | 54.8                   | -5.5                           |
| 7                                                 | 4874.00        | 57.0 PK                       | 74.0              | -17.0          | 2.24 V                   | 185                        | 56.1                   | 0.9                            |
| 8                                                 | 4874.00        | 44.3 AV                       | 54.0              | -9.7           | 2.24 V                   | 185                        | 43.4                   | 0.9                            |
| 9                                                 | 7311.00        | 56.0 PK                       | 74.0              | -18.0          | 2.40 V                   | 183                        | 48.6                   | 7.4                            |
| 10                                                | 7311.00        | 43.1 AV                       | 54.0              | -10.9          | 2.40 V                   | 183                        | 35.7                   | 7.4                            |
| 11                                                | #9748.00       | -                             | -                 | -              | -                        | -                          | -                      | -                              |
| 12                                                | 12185.00       | -                             | -                 | -              | -                        | -                          | -                      | -                              |
| 13                                                | #14622.00      | -                             | -                 | -              | -                        | -                          | -                      | -                              |
| 14                                                | #17059.00      | -                             | -                 | -              | -                        | -                          | -                      | -                              |
| 15                                                | 19496.00       | -                             | -                 | -              | -                        | -                          | -                      | -                              |
| 16                                                | #21933.00      | -                             | -                 | -              | -                        | -                          | -                      | -                              |
| 17                                                | #24370.00      | -                             | -                 | -              | -                        | -                          | -                      | -                              |

#### REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

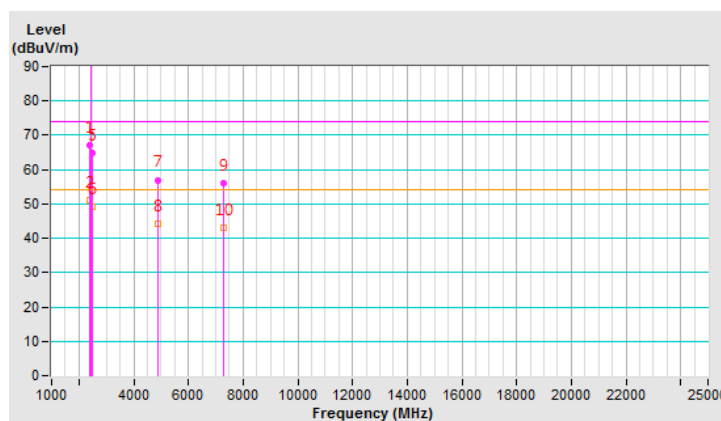


|         |                |         |                                                |
|---------|----------------|---------|------------------------------------------------|
| 操作模式：   | 發射             | 調變技術：   | OFDM                                           |
| 基本波頻率：  | CH 11：2462 MHz | 測試儀器：   | (PK) RB=1MHz, VB=3MHz<br>(AV) RB=1MHz, VB=10Hz |
| 量測場地溫度： | 22°C           | 量測場地濕度： | 70%RH                                          |
| 測試日期：   | 105 年 10 月 7 日 | 測試者：    | 鄭樹營                                            |

#### ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
|-----|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| 1   | *2462.00    | 105.1 PK                |                |             | 1.03 H             | 107                  | 110.5            | -5.4                     |
| 2   | *2462.00    | 94.3 AV                 |                |             | 1.03 H             | 107                  | 99.7             | -5.4                     |
| 3   | 2483.50     | 60.8 PK                 | 74.0           | -13.2       | 1.03 H             | 107                  | 66.3             | -5.5                     |
| 4   | 2483.50     | 47.8 AV                 | 54.0           | -6.2        | 1.03 H             | 107                  | 53.3             | -5.5                     |
| 5   | 4924.00     | 45.2 PK                 | 74.0           | -28.8       | 3.23 H             | 37                   | 44.1             | 1.1                      |
| 6   | 4924.00     | 31.7 AV                 | 54.0           | -22.3       | 3.23 H             | 37                   | 30.6             | 1.1                      |
| 7   | 7386.00     | 46.6 PK                 | 74.0           | -27.4       | 1.10 H             | 244                  | 39.0             | 7.6                      |
| 8   | 7386.00     | 34.0 AV                 | 54.0           | -20.0       | 1.10 H             | 244                  | 26.4             | 7.6                      |
| 9   | #9848.00    | -                       | -              | -           | -                  | -                    | -                | -                        |
| 10  | 12310.00    | -                       | -              | -           | -                  | -                    | -                | -                        |
| 11  | #14772.00   | -                       | -              | -           | -                  | -                    | -                | -                        |
| 12  | #17234.00   | -                       | -              | -           | -                  | -                    | -                | -                        |
| 13  | 19696.00    | -                       | -              | -           | -                  | -                    | -                | -                        |
| 14  | 22158.00    | -                       | -              | -           | -                  | -                    | -                | -                        |
| 15  | #24620.00   | -                       | -              | -           | -                  | -                    | -                | -                        |

#### REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

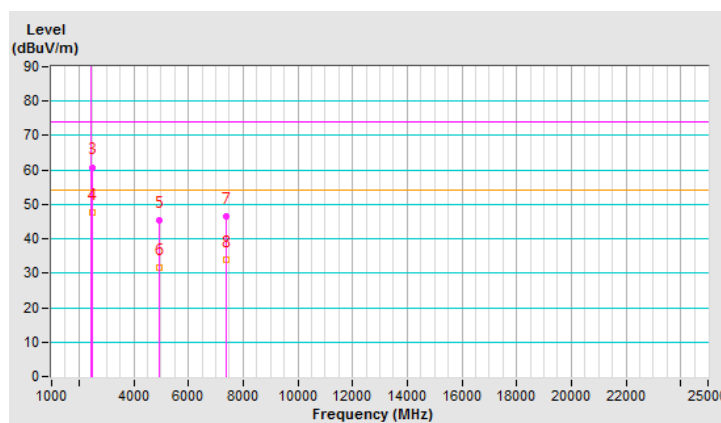


|         |                |         |                                                |
|---------|----------------|---------|------------------------------------------------|
| 操作模式：   | 發射             | 調變技術：   | OFDM                                           |
| 基本波頻率：  | CH 11：2462 MHz | 測試儀器：   | (PK) RB=1MHz, VB=3MHz<br>(AV) RB=1MHz, VB=10Hz |
| 量測場地溫度： | 22°C           | 量測場地濕度： | 70%RH                                          |
| 測試日期：   | 105 年 10 月 7 日 | 測試者：    | 鄭樹營                                            |

| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M |             |                         |                |             |                    |                      |                  |                          |
|---------------------------------------------------|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| NO.                                               | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
| 1                                                 | *2462.00    | 114.0 PK                |                |             | 1.68 V             | 357                  | 119.4            | -5.4                     |
| 2                                                 | *2462.00    | 103.2 AV                |                |             | 1.68 V             | 357                  | 108.6            | -5.4                     |
| 3                                                 | 2483.50     | 66.8 PK                 | 74.0           | -7.2        | 1.68 V             | 357                  | 72.3             | -5.5                     |
| 4                                                 | 2483.50     | 53.9 AV                 | 54.0           | -0.1        | 1.68 V             | 357                  | 59.4             | -5.5                     |
| 5                                                 | 4924.00     | 53.1 PK                 | 74.0           | -20.9       | 1.54 V             | 360                  | 52.0             | 1.1                      |
| 6                                                 | 4924.00     | 39.2 AV                 | 54.0           | -14.8       | 1.54 V             | 360                  | 38.1             | 1.1                      |
| 7                                                 | 7386.00     | 47.9 PK                 | 74.0           | -26.1       | 2.34 V             | 185                  | 40.3             | 7.6                      |
| 8                                                 | 7386.00     | 34.5 AV                 | 54.0           | -19.5       | 2.34 V             | 185                  | 26.9             | 7.6                      |
| 9                                                 | #9848.00    | -                       | -              | -           | -                  | -                    | -                | -                        |
| 10                                                | 12310.00    | -                       | -              | -           | -                  | -                    | -                | -                        |
| 11                                                | #14772.00   | -                       | -              | -           | -                  | -                    | -                | -                        |
| 12                                                | #17234.00   | -                       | -              | -           | -                  | -                    | -                | -                        |
| 13                                                | 19696.00    | -                       | -              | -           | -                  | -                    | -                | -                        |
| 14                                                | 22158.00    | -                       | -              | -           | -                  | -                    | -                | -                        |
| 15                                                | #24620.00   | -                       | -              | -           | -                  | -                    | -                | -                        |

#### REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

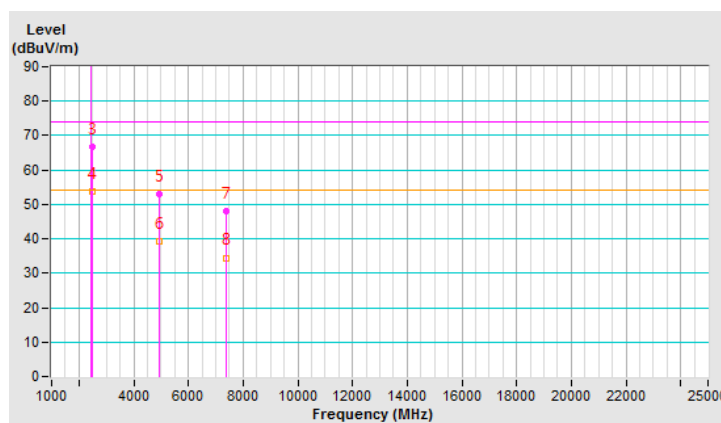

## 802.11n (HT20)


|         |                |         |                                                |
|---------|----------------|---------|------------------------------------------------|
| 操作模式：   | 發射             | 調變技術：   | OFDM                                           |
| 基本波頻率：  | CH 1：2412 MHz  | 測試儀器：   | (PK) RB=1MHz, VB=3MHz<br>(AV) RB=1MHz, VB=10Hz |
| 量測場地溫度： | 22°C           | 量測場地濕度： | 70%RH                                          |
| 測試日期：   | 105 年 10 月 7 日 | 測試者：    | 鄭樹營                                            |

## ANTENNA POLARITY &amp; TEST DISTANCE: HORIZONTAL AT 3 M

| NO. | FREQ.<br>(MHz) | EMISSION<br>LEVEL<br>(dBuV/m) | LIMIT<br>(dBuV/m) | MARGIN<br>(dB) | ANTENNA<br>HEIGHT<br>(m) | TABLE<br>ANGLE<br>(Degree) | RAW<br>VALUE<br>(dBuV) | CORRECTION<br>FACTOR<br>(dB/m) |
|-----|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| 1   | 2390.00        | 61.1 PK                       | 74.0              | -12.9          | 1.03 H                   | 100                        | 66.8                   | -5.7                           |
| 2   | 2390.00        | 47.9 AV                       | 54.0              | -6.1           | 1.03 H                   | 100                        | 53.6                   | -5.7                           |
| 3   | *2412.00       | 103.1 PK                      |                   |                | 1.03 H                   | 100                        | 108.7                  | -5.6                           |
| 4   | *2412.00       | 92.8 AV                       |                   |                | 1.03 H                   | 100                        | 98.4                   | -5.6                           |
| 5   | 4824.00        | 45.5 PK                       | 74.0              | -28.5          | 3.19 H                   | 50                         | 44.7                   | 0.8                            |
| 6   | 4824.00        | 31.9 AV                       | 54.0              | -22.1          | 3.19 H                   | 50                         | 31.1                   | 0.8                            |
| 7   | #7236.00       | -                             | -                 | -              | -                        | -                          | -                      | -                              |
| 8   | #9648.00       | -                             | -                 | -              | -                        | -                          | -                      | -                              |
| 9   | 12060.00       | -                             | -                 | -              | -                        | -                          | -                      | -                              |
| 10  | 14472.00       | -                             | -                 | -              | -                        | -                          | -                      | -                              |
| 11  | #16884.00      | -                             | -                 | -              | -                        | -                          | -                      | -                              |
| 12  | 19296.00       | -                             | -                 | -              | -                        | -                          | -                      | -                              |
| 13  | #21708.00      | -                             | -                 | -              | -                        | -                          | -                      | -                              |
| 14  | #24120.00      | -                             | -                 | -              | -                        | -                          | -                      | -                              |

## REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

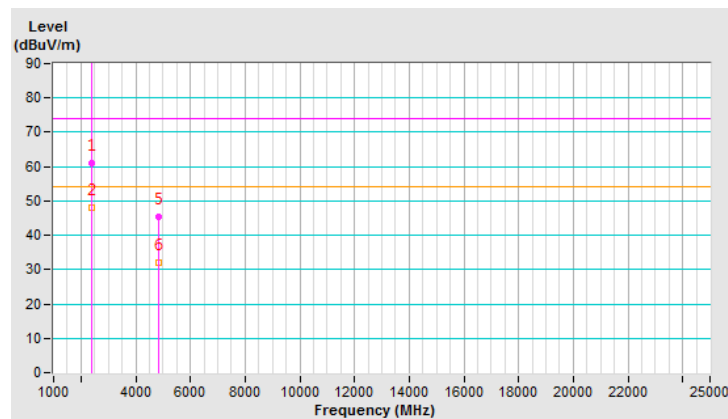


|         |                |         |                                                |
|---------|----------------|---------|------------------------------------------------|
| 操作模式：   | 發射             | 調變技術：   | OFDM                                           |
| 基本波頻率：  | CH 1：2412 MHz  | 測試儀器：   | (PK) RB=1MHz, VB=3MHz<br>(AV) RB=1MHz, VB=10Hz |
| 量測場地溫度： | 22°C           | 量測場地濕度： | 70%RH                                          |
| 測試日期：   | 105 年 10 月 7 日 | 測試者：    | 鄭樹營                                            |

| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M |             |                         |                |             |                    |                      |                  |                          |
|---------------------------------------------------|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| NO.                                               | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
| 1                                                 | 2390.00     | 69.8 PK                 | 74.0           | -4.2        | 1.84 V             | 173                  | 75.5             | -5.7                     |
| 2                                                 | 2390.00     | 53.6 AV                 | 54.0           | -0.4        | 1.84 V             | 173                  | 59.3             | -5.7                     |
| 3                                                 | *2412.00    | 112.6 PK                |                |             | 1.84 V             | 173                  | 118.2            | -5.6                     |
| 4                                                 | *2412.00    | 102.0 AV                |                |             | 1.84 V             | 173                  | 107.6            | -5.6                     |
| 5                                                 | 4824.00     | 53.5 PK                 | 74.0           | -20.5       | 1.56 V             | 353                  | 52.7             | 0.8                      |
| 6                                                 | 4824.00     | 39.4 AV                 | 54.0           | -14.6       | 1.56 V             | 353                  | 38.6             | 0.8                      |
| 7                                                 | #7236.00    | -                       | -              | -           | -                  | -                    | -                | -                        |
| 8                                                 | #9648.00    | -                       | -              | -           | -                  | -                    | -                | -                        |
| 9                                                 | 12060.00    | -                       | -              | -           | -                  | -                    | -                | -                        |
| 10                                                | 14472.00    | -                       | -              | -           | -                  | -                    | -                | -                        |
| 11                                                | #16884.00   | -                       | -              | -           | -                  | -                    | -                | -                        |
| 12                                                | 19296.00    | -                       | -              | -           | -                  | -                    | -                | -                        |
| 13                                                | #21708.00   | -                       | -              | -           | -                  | -                    | -                | -                        |
| 14                                                | #24120.00   | -                       | -              | -           | -                  | -                    | -                | -                        |

#### REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

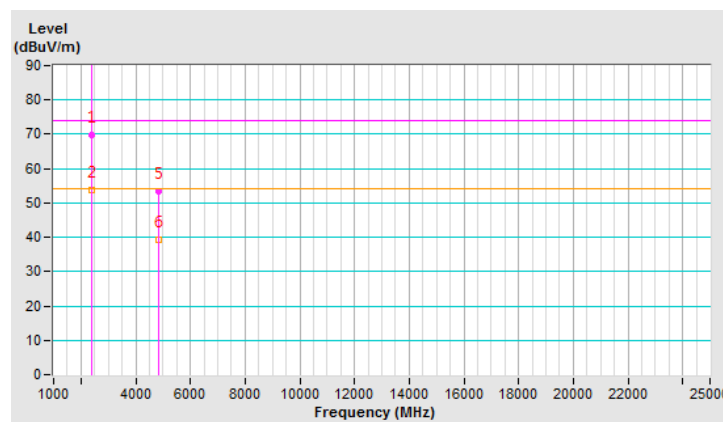


|         |                |         |                                                |
|---------|----------------|---------|------------------------------------------------|
| 操作模式：   | 發射             | 調變技術：   | OFDM                                           |
| 基本波頻率：  | CH 6：2437 MHz  | 測試儀器：   | (PK) RB=1MHz, VB=3MHz<br>(AV) RB=1MHz, VB=10Hz |
| 量測場地溫度： | 22°C           | 量測場地濕度： | 70%RH                                          |
| 測試日期：   | 105 年 10 月 7 日 | 測試者：    | 鄭樹營                                            |

| ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M |                |                               |                   |                |                          |                            |                        |                                |
|-----------------------------------------------------|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| NO.                                                 | FREQ.<br>(MHz) | EMISSION<br>LEVEL<br>(dBuV/m) | LIMIT<br>(dBuV/m) | MARGIN<br>(dB) | ANTENNA<br>HEIGHT<br>(m) | TABLE<br>ANGLE<br>(Degree) | RAW<br>VALUE<br>(dBuV) | CORRECTION<br>FACTOR<br>(dB/m) |
| 1                                                   | 2390.00        | 59.0 PK                       | 74.0              | -15.0          | 1.03 H                   | 101                        | 64.7                   | -5.7                           |
| 2                                                   | 2390.00        | 44.0 AV                       | 54.0              | -10.0          | 1.03 H                   | 101                        | 49.7                   | -5.7                           |
| 3                                                   | *2437.00       | 110.2 PK                      |                   |                | 1.03 H                   | 101                        | 115.7                  | -5.5                           |
| 4                                                   | *2437.00       | 100.1 AV                      |                   |                | 1.03 H                   | 101                        | 105.6                  | -5.5                           |
| 5                                                   | 2483.50        | 57.1 PK                       | 74.0              | -16.9          | 1.03 H                   | 101                        | 62.6                   | -5.5                           |
| 6                                                   | 2483.50        | 41.7 AV                       | 54.0              | -12.3          | 1.03 H                   | 101                        | 47.2                   | -5.5                           |
| 7                                                   | 4874.00        | 51.1 PK                       | 74.0              | -22.9          | 3.13 H                   | 77                         | 50.2                   | 0.9                            |
| 8                                                   | 4874.00        | 37.1 AV                       | 54.0              | -16.9          | 3.13 H                   | 77                         | 36.2                   | 0.9                            |
| 9                                                   | 7311.00        | 49.0 PK                       | 74.0              | -25.0          | 1.25 H                   | 246                        | 41.6                   | 7.4                            |
| 10                                                  | 7311.00        | 37.1 AV                       | 54.0              | -16.9          | 1.25 H                   | 246                        | 29.7                   | 7.4                            |
| 11                                                  | #9748.00       | -                             | -                 | -              | -                        | -                          | -                      | -                              |
| 12                                                  | 12185.00       | -                             | -                 | -              | -                        | -                          | -                      | -                              |
| 13                                                  | #14622.00      | -                             | -                 | -              | -                        | -                          | -                      | -                              |
| 14                                                  | #17059.00      | -                             | -                 | -              | -                        | -                          | -                      | -                              |
| 15                                                  | 19496.00       | -                             | -                 | -              | -                        | -                          | -                      | -                              |
| 16                                                  | #21933.00      | -                             | -                 | -              | -                        | -                          | -                      | -                              |
| 17                                                  | #24370.00      | -                             | -                 | -              | -                        | -                          | -                      | -                              |

#### REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

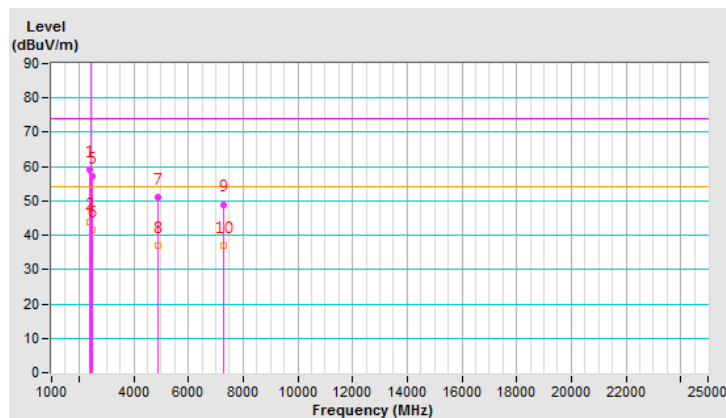


|         |                |         |                                                |
|---------|----------------|---------|------------------------------------------------|
| 操作模式：   | 發射             | 調變技術：   | OFDM                                           |
| 基本波頻率：  | CH 6：2437 MHz  | 測試儀器：   | (PK) RB=1MHz, VB=3MHz<br>(AV) RB=1MHz, VB=10Hz |
| 量測場地溫度： | 22°C           | 量測場地濕度： | 70%RH                                          |
| 測試日期：   | 105 年 10 月 7 日 | 測試者：    | 鄭樹營                                            |

| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M |                |                               |                   |                |                          |                            |                        |                                |
|---------------------------------------------------|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| NO.                                               | FREQ.<br>(MHz) | EMISSION<br>LEVEL<br>(dBuV/m) | LIMIT<br>(dBuV/m) | MARGIN<br>(dB) | ANTENNA<br>HEIGHT<br>(m) | TABLE<br>ANGLE<br>(Degree) | RAW<br>VALUE<br>(dBuV) | CORRECTION<br>FACTOR<br>(dB/m) |
| 1                                                 | 2390.00        | 68.6 PK                       | 74.0              | -5.4           | 1.61 V                   | 175                        | 74.3                   | -5.7                           |
| 2                                                 | 2390.00        | 52.4 AV                       | 54.0              | -1.6           | 1.61 V                   | 175                        | 58.1                   | -5.7                           |
| 3                                                 | *2437.00       | 120.0 PK                      |                   |                | 1.61 V                   | 175                        | 125.5                  | -5.5                           |
| 4                                                 | *2437.00       | 109.5 AV                      |                   |                | 1.61 V                   | 175                        | 115.0                  | -5.5                           |
| 5                                                 | 2483.50        | 67.1 PK                       | 74.0              | -6.9           | 1.61 V                   | 175                        | 72.6                   | -5.5                           |
| 6                                                 | 2483.50        | 50.7 AV                       | 54.0              | -3.3           | 1.61 V                   | 175                        | 56.2                   | -5.5                           |
| 7                                                 | 4874.00        | 57.6 PK                       | 74.0              | -16.4          | 1.50 V                   | 1                          | 56.7                   | 0.9                            |
| 8                                                 | 4874.00        | 44.8 AV                       | 54.0              | -9.2           | 1.50 V                   | 1                          | 43.9                   | 0.9                            |
| 9                                                 | 7311.00        | 55.7 PK                       | 74.0              | -18.3          | 2.31 V                   | 176                        | 48.3                   | 7.4                            |
| 10                                                | 7311.00        | 42.7 AV                       | 54.0              | -11.3          | 2.31 V                   | 176                        | 35.3                   | 7.4                            |
| 11                                                | #9748.00       | -                             | -                 | -              | -                        | -                          | -                      | -                              |
| 12                                                | 12185.00       | -                             | -                 | -              | -                        | -                          | -                      | -                              |
| 13                                                | #14622.00      | -                             | -                 | -              | -                        | -                          | -                      | -                              |
| 14                                                | #17059.00      | -                             | -                 | -              | -                        | -                          | -                      | -                              |
| 15                                                | 19496.00       | -                             | -                 | -              | -                        | -                          | -                      | -                              |
| 16                                                | #21933.00      | -                             | -                 | -              | -                        | -                          | -                      | -                              |
| 17                                                | #24370.00      | -                             | -                 | -              | -                        | -                          | -                      | -                              |

#### REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

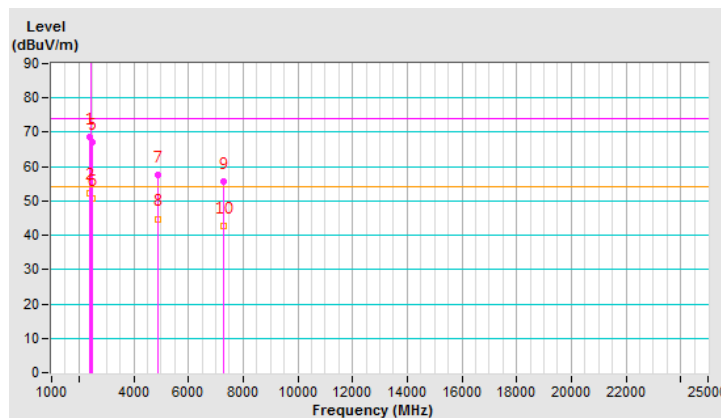


|         |                |         |                                                |
|---------|----------------|---------|------------------------------------------------|
| 操作模式：   | 發射             | 調變技術：   | OFDM                                           |
| 基本波頻率：  | CH 11：2462 MHz | 測試儀器：   | (PK) RB=1MHz, VB=3MHz<br>(AV) RB=1MHz, VB=10Hz |
| 量測場地溫度： | 22°C           | 量測場地濕度： | 70%RH                                          |
| 測試日期：   | 105 年 10 月 7 日 | 測試者：    | 鄭樹營                                            |

| ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M |             |                         |                |             |                    |                      |                  |                          |
|-----------------------------------------------------|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| NO.                                                 | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
| 1                                                   | *2462.00    | 104.8 PK                |                |             | 1.03 H             | 106                  | 110.2            | -5.4                     |
| 2                                                   | *2462.00    | 94.5 AV                 |                |             | 1.03 H             | 106                  | 99.9             | -5.4                     |
| 3                                                   | 2483.50     | 60.5 PK                 | 74.0           | -13.5       | 1.03 H             | 106                  | 66.0             | -5.5                     |
| 4                                                   | 2483.50     | 47.2 AV                 | 54.0           | -6.8        | 1.03 H             | 106                  | 52.7             | -5.5                     |
| 5                                                   | 4924.00     | 46.0 PK                 | 74.0           | -28.0       | 3.19 H             | 64                   | 44.9             | 1.1                      |
| 6                                                   | 4924.00     | 32.4 AV                 | 54.0           | -21.6       | 3.19 H             | 64                   | 31.3             | 1.1                      |
| 7                                                   | 7386.00     | 47.4 PK                 | 74.0           | -26.6       | 1.21 H             | 233                  | 39.8             | 7.6                      |
| 8                                                   | 7386.00     | 34.7 AV                 | 54.0           | -19.3       | 1.21 H             | 233                  | 27.1             | 7.6                      |
| 9                                                   | #9848.00    | -                       | -              | -           | -                  | -                    | -                | -                        |
| 10                                                  | 12310.00    | -                       | -              | -           | -                  | -                    | -                | -                        |
| 11                                                  | #14772.00   | -                       | -              | -           | -                  | -                    | -                | -                        |
| 12                                                  | #17234.00   | -                       | -              | -           | -                  | -                    | -                | -                        |
| 13                                                  | 19696.00    | -                       | -              | -           | -                  | -                    | -                | -                        |
| 14                                                  | 22158.00    | -                       | -              | -           | -                  | -                    | -                | -                        |
| 15                                                  | #24620.00   | -                       | -              | -           | -                  | -                    | -                | -                        |

#### REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

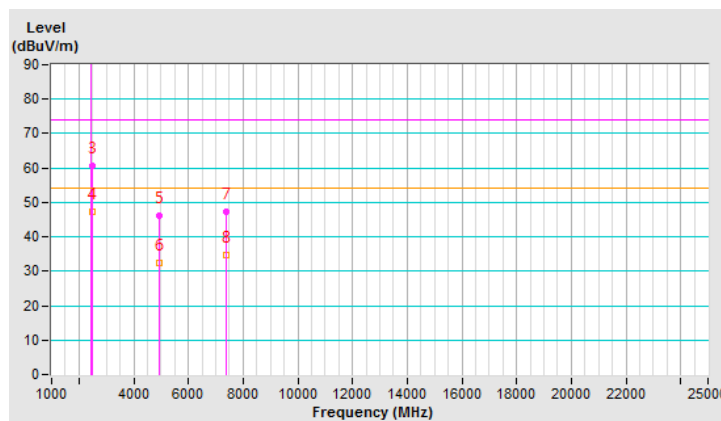


|         |                |         |                                                |
|---------|----------------|---------|------------------------------------------------|
| 操作模式：   | 發射             | 調變技術：   | OFDM                                           |
| 基本波頻率：  | CH 11：2462 MHz | 測試儀器：   | (PK) RB=1MHz, VB=3MHz<br>(AV) RB=1MHz, VB=10Hz |
| 量測場地溫度： | 22°C           | 量測場地濕度： | 70%RH                                          |
| 測試日期：   | 105 年 10 月 7 日 | 測試者：    | 鄭樹營                                            |

| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M |             |                         |                |             |                    |                      |                  |                          |
|---------------------------------------------------|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| NO.                                               | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
| 1                                                 | *2462.00    | 114.1 PK                |                |             | 1.72 V             | 178                  | 119.5            | -5.4                     |
| 2                                                 | *2462.00    | 103.8 AV                |                |             | 1.72 V             | 178                  | 109.2            | -5.4                     |
| 3                                                 | 2483.50     | 72.3 PK                 | 74.0           | -1.7        | 1.72 V             | 178                  | 77.8             | -5.5                     |
| 4                                                 | 2483.50     | 53.9 AV                 | 54.0           | -0.1        | 1.72 V             | 178                  | 59.4             | -5.5                     |
| 5                                                 | 4924.00     | 53.3 PK                 | 74.0           | -20.7       | 1.55 V             | 360                  | 52.2             | 1.1                      |
| 6                                                 | 4924.00     | 39.3 AV                 | 54.0           | -14.7       | 1.55 V             | 360                  | 38.2             | 1.1                      |
| 7                                                 | 7386.00     | 47.4 PK                 | 74.0           | -26.6       | 2.39 V             | 181                  | 39.8             | 7.6                      |
| 8                                                 | 7386.00     | 34.0 AV                 | 54.0           | -20.0       | 2.39 V             | 181                  | 26.4             | 7.6                      |
| 9                                                 | #9848.00    | -                       | -              | -           | -                  | -                    | -                | -                        |
| 10                                                | 12310.00    | -                       | -              | -           | -                  | -                    | -                | -                        |
| 11                                                | #14772.00   | -                       | -              | -           | -                  | -                    | -                | -                        |
| 12                                                | #17234.00   | -                       | -              | -           | -                  | -                    | -                | -                        |
| 13                                                | 19696.00    | -                       | -              | -           | -                  | -                    | -                | -                        |
| 14                                                | 22158.00    | -                       | -              | -           | -                  | -                    | -                | -                        |
| 15                                                | #24620.00   | -                       | -              | -           | -                  | -                    | -                | -                        |

#### REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

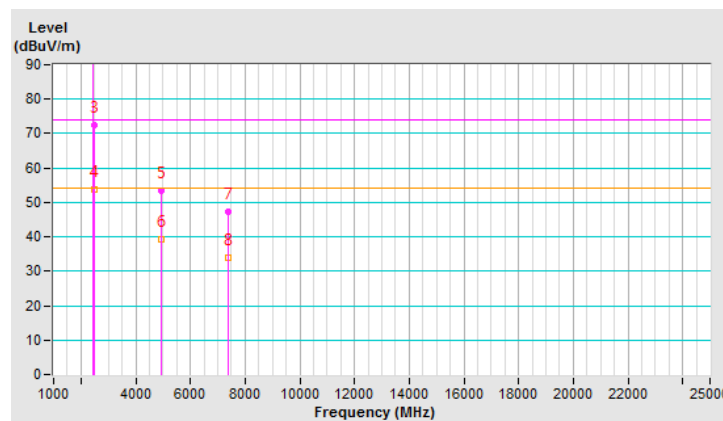

# 802.11n (HT40)


|         |                 |         |                                                |
|---------|-----------------|---------|------------------------------------------------|
| 操作模式：   | 發射              | 調變技術：   | OFDM                                           |
| 基本波頻率：  | CH 3：2422 MHz   | 測試儀器：   | (PK) RB=1MHz, VB=3MHz<br>(AV) RB=1MHz, VB=10Hz |
| 量測場地溫度： | 22°C            | 量測場地濕度： | 64%RH                                          |
| 測試日期：   | 106 年 10 月 27 日 | 測試者：    | 陳志毅                                            |

## ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

| NO. | FREQ.<br>(MHz) | EMISSION<br>LEVEL<br>(dBuV/m) | LIMIT<br>(dBuV/m) | MARGIN<br>(dB) | ANTENNA<br>HEIGHT<br>(m) | TABLE<br>ANGLE<br>(Degree) | RAW<br>VALUE<br>(dBuV) | CORRECTION<br>FACTOR<br>(dB/m) |
|-----|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| 1   | 2390.00        | 56.0 PK                       | 74.0              | -18.0          | 1.04 H                   | 101                        | 57.3                   | -1.3                           |
| 2   | 2390.00        | 42.6 AV                       | 54.0              | -11.4          | 1.04 H                   | 101                        | 43.9                   | -1.3                           |
| 3   | *2422.00       | 95.0 PK                       |                   |                | 1.04 H                   | 101                        | 96.3                   | -1.3                           |
| 4   | *2422.00       | 84.8 AV                       |                   |                | 1.04 H                   | 101                        | 86.1                   | -1.3                           |
| 5   | 4844.00        | 43.4 PK                       | 74.0              | -30.6          | 1.17 H                   | 80                         | 40.1                   | 3.3                            |
| 6   | 4844.00        | 39.2 AV                       | 54.0              | -14.8          | 1.17 H                   | 80                         | 35.9                   | 3.3                            |
| 7   | 7266.00        | 45.2 PK                       | 74.0              | -28.8          | 1.23 H                   | 260                        | 35.4                   | 9.8                            |
| 8   | 7266.00        | 36.1 AV                       | 54.0              | -17.9          | 1.23 H                   | 260                        | 26.3                   | 9.8                            |
| 9   | #9688.00       | -                             | -                 | -              | -                        | -                          | -                      | -                              |
| 10  | 12110.00       | -                             | -                 | -              | -                        | -                          | -                      | -                              |
| 11  | #14532.00      | -                             | -                 | -              | -                        | -                          | -                      | -                              |
| 12  | #16954.00      | -                             | -                 | -              | -                        | -                          | -                      | -                              |
| 13  | 19376.00       | -                             | -                 | -              | -                        | -                          | -                      | -                              |
| 14  | #21798.00      | -                             | -                 | -              | -                        | -                          | -                      | -                              |
| 15  | #24220.00      | -                             | -                 | -              | -                        | -                          | -                      | -                              |

## REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

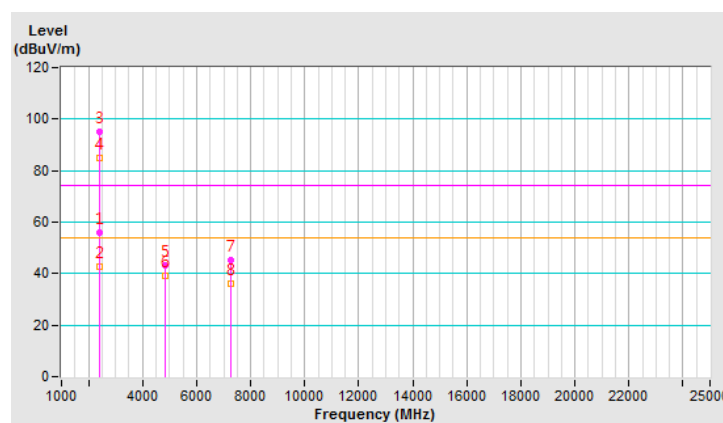


|         |                 |         |                                                |
|---------|-----------------|---------|------------------------------------------------|
| 操作模式：   | 發射              | 調變技術：   | OFDM                                           |
| 基本波頻率：  | CH 3：2422 MHz   | 測試儀器：   | (PK) RB=1MHz, VB=3MHz<br>(AV) RB=1MHz, VB=10Hz |
| 量測場地溫度： | 22°C            | 量測場地濕度： | 64%RH                                          |
| 測試日期：   | 106 年 10 月 27 日 | 測試者：    | 陳志毅                                            |

| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M |             |                         |                |             |                    |                      |                  |                          |
|---------------------------------------------------|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| NO.                                               | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
| 1                                                 | 2390.00     | 61.6 PK                 | 74.0           | -12.4       | 1.76 V             | 173                  | 62.9             | -1.3                     |
| 2                                                 | 2390.00     | 50.3 AV                 | 54.0           | -3.7        | 1.76 V             | 173                  | 51.6             | -1.3                     |
| 3                                                 | *2422.00    | 103.6 PK                |                |             | 1.76 V             | 173                  | 104.9            | -1.3                     |
| 4                                                 | *2422.00    | 93.2 AV                 |                |             | 1.76 V             | 173                  | 94.5             | -1.3                     |
| 5                                                 | 4844.00     | 43.1 PK                 | 74.0           | -30.9       | 1.64 V             | 222                  | 39.8             | 3.3                      |
| 6                                                 | 4844.00     | 39.4 AV                 | 54.0           | -14.6       | 1.64 V             | 222                  | 36.1             | 3.3                      |
| 7                                                 | 7266.00     | 45.3 PK                 | 74.0           | -28.7       | 1.43 V             | 211                  | 35.5             | 9.8                      |
| 8                                                 | 7266.00     | 35.7 AV                 | 54.0           | -18.3       | 1.43 V             | 211                  | 25.9             | 9.8                      |
| 9                                                 | #9688.00    | -                       | -              | -           | -                  | -                    | -                | -                        |
| 10                                                | 12110.00    | -                       | -              | -           | -                  | -                    | -                | -                        |
| 11                                                | #14532.00   | -                       | -              | -           | -                  | -                    | -                | -                        |
| 12                                                | #16954.00   | -                       | -              | -           | -                  | -                    | -                | -                        |
| 13                                                | 19376.00    | -                       | -              | -           | -                  | -                    | -                | -                        |
| 14                                                | #21798.00   | -                       | -              | -           | -                  | -                    | -                | -                        |
| 15                                                | #24220.00   | -                       | -              | -           | -                  | -                    | -                | -                        |

#### REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

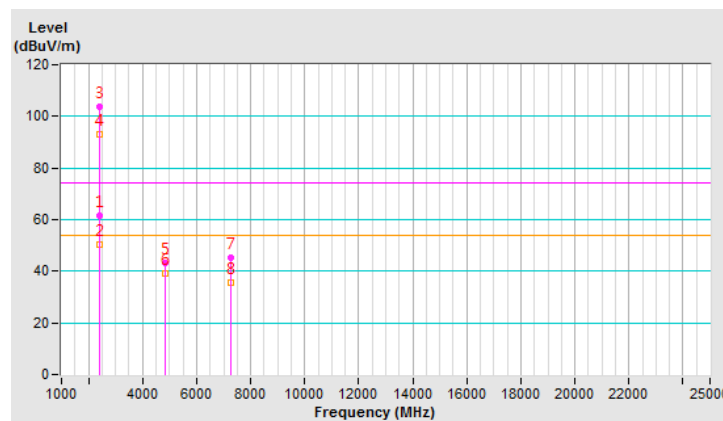


|         |                 |         |                                                |
|---------|-----------------|---------|------------------------------------------------|
| 操作模式：   | 發射              | 調變技術：   | OFDM                                           |
| 基本波頻率：  | CH 6：2437 MHz   | 測試儀器：   | (PK) RB=1MHz, VB=3MHz<br>(AV) RB=1MHz, VB=10Hz |
| 量測場地溫度： | 22°C            | 量測場地濕度： | 64%RH                                          |
| 測試日期：   | 106 年 10 月 27 日 | 測試者：    | 陳志毅                                            |

| ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M |                |                               |                   |                |                          |                            |                        |                                |
|-----------------------------------------------------|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| NO.                                                 | FREQ.<br>(MHz) | EMISSION<br>LEVEL<br>(dBuV/m) | LIMIT<br>(dBuV/m) | MARGIN<br>(dB) | ANTENNA<br>HEIGHT<br>(m) | TABLE<br>ANGLE<br>(Degree) | RAW<br>VALUE<br>(dBuV) | CORRECTION<br>FACTOR<br>(dB/m) |
| 1                                                   | 2390.00        | 58.7 PK                       | 74.0              | -15.3          | 1.13 H                   | 105                        | 60.0                   | -1.3                           |
| 2                                                   | 2390.00        | 44.8 AV                       | 54.0              | -9.2           | 1.13 H                   | 105                        | 46.1                   | -1.3                           |
| 3                                                   | *2437.00       | 103.0 PK                      |                   |                | 1.13 H                   | 105                        | 104.2                  | -1.2                           |
| 4                                                   | *2437.00       | 93.0 AV                       |                   |                | 1.13 H                   | 105                        | 94.2                   | -1.2                           |
| 5                                                   | 2500.00        | 59.3 PK                       | 74.0              | -14.7          | 1.13 H                   | 105                        | 60.2                   | -0.9                           |
| 6                                                   | 2500.00        | 45.9 AV                       | 54.0              | -8.1           | 1.13 H                   | 105                        | 46.8                   | -0.9                           |
| 7                                                   | 4874.00        | 44.3 PK                       | 74.0              | -29.7          | 1.10 H                   | 88                         | 41.0                   | 3.3                            |
| 8                                                   | 4874.00        | 40.2 AV                       | 54.0              | -13.8          | 1.10 H                   | 88                         | 36.9                   | 3.3                            |
| 9                                                   | 7311.00        | 46.1 PK                       | 74.0              | -27.9          | 1.16 H                   | 240                        | 36.3                   | 9.8                            |
| 10                                                  | 7311.00        | 36.7 AV                       | 54.0              | -17.3          | 1.16 H                   | 240                        | 26.9                   | 9.8                            |
| 11                                                  | #9748.00       | -                             | -                 | -              | -                        | -                          | -                      | -                              |
| 12                                                  | 12185.00       | -                             | -                 | -              | -                        | -                          | -                      | -                              |
| 13                                                  | #14622.00      | -                             | -                 | -              | -                        | -                          | -                      | -                              |
| 14                                                  | #17059.00      | -                             | -                 | -              | -                        | -                          | -                      | -                              |
| 15                                                  | 19496.00       | -                             | -                 | -              | -                        | -                          | -                      | -                              |
| 16                                                  | #21933.00      | -                             | -                 | -              | -                        | -                          | -                      | -                              |
| 17                                                  | #24370.00      | -                             | -                 | -              | -                        | -                          | -                      | -                              |

#### REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

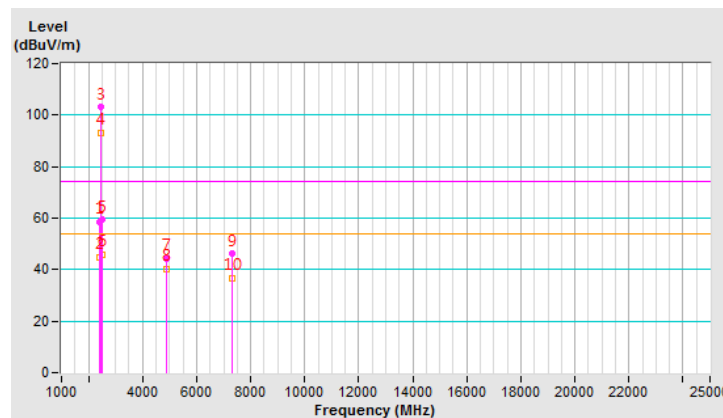


|         |                 |         |                                                |
|---------|-----------------|---------|------------------------------------------------|
| 操作模式：   | 發射              | 調變技術：   | OFDM                                           |
| 基本波頻率：  | CH 6：2437 MHz   | 測試儀器：   | (PK) RB=1MHz, VB=3MHz<br>(AV) RB=1MHz, VB=10Hz |
| 量測場地溫度： | 22°C            | 量測場地濕度： | 64%RH                                          |
| 測試日期：   | 106 年 10 月 27 日 | 測試者：    | 陳志毅                                            |

| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M |                |                               |                   |                |                          |                            |                        |                                |
|---------------------------------------------------|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| NO.                                               | FREQ.<br>(MHz) | EMISSION<br>LEVEL<br>(dBuV/m) | LIMIT<br>(dBuV/m) | MARGIN<br>(dB) | ANTENNA<br>HEIGHT<br>(m) | TABLE<br>ANGLE<br>(Degree) | RAW<br>VALUE<br>(dBuV) | CORRECTION<br>FACTOR<br>(dB/m) |
| 1                                                 | 2390.00        | 64.3 PK                       | 74.0              | -9.7           | 1.78 V                   | 174                        | 65.6                   | -1.3                           |
| 2                                                 | 2390.00        | 52.5 AV                       | 54.0              | -1.5           | 1.78 V                   | 174                        | 53.8                   | -1.3                           |
| 3                                                 | *2437.00       | 111.6 PK                      |                   |                | 1.78 V                   | 174                        | 112.8                  | -1.2                           |
| 4                                                 | *2437.00       | 101.4 AV                      |                   |                | 1.78 V                   | 174                        | 102.6                  | -1.2                           |
| 5                                                 | 2500.00        | 64.9 PK                       | 74.0              | -9.1           | 1.78 V                   | 174                        | 65.8                   | -0.9                           |
| 6                                                 | 2500.00        | 53.6 AV                       | 54.0              | -0.4           | 1.78 V                   | 174                        | 54.5                   | -0.9                           |
| 7                                                 | 4874.00        | 48.9 PK                       | 74.0              | -25.1          | 1.54 V                   | 200                        | 45.6                   | 3.3                            |
| 8                                                 | 4874.00        | 46.5 AV                       | 54.0              | -7.5           | 1.54 V                   | 200                        | 43.2                   | 3.3                            |
| 9                                                 | 7311.00        | 45.4 PK                       | 74.0              | -28.6          | 1.39 V                   | 207                        | 35.6                   | 9.8                            |
| 10                                                | 7311.00        | 36.0 AV                       | 54.0              | -18.0          | 1.39 V                   | 207                        | 26.2                   | 9.8                            |
| 11                                                | #9748.00       | -                             | -                 | -              | -                        | -                          | -                      | -                              |
| 12                                                | 12185.00       | -                             | -                 | -              | -                        | -                          | -                      | -                              |
| 13                                                | #14622.00      | -                             | -                 | -              | -                        | -                          | -                      | -                              |
| 14                                                | #17059.00      | -                             | -                 | -              | -                        | -                          | -                      | -                              |
| 15                                                | 19496.00       | -                             | -                 | -              | -                        | -                          | -                      | -                              |
| 16                                                | #21933.00      | -                             | -                 | -              | -                        | -                          | -                      | -                              |
| 17                                                | #24370.00      | -                             | -                 | -              | -                        | -                          | -                      | -                              |

#### REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

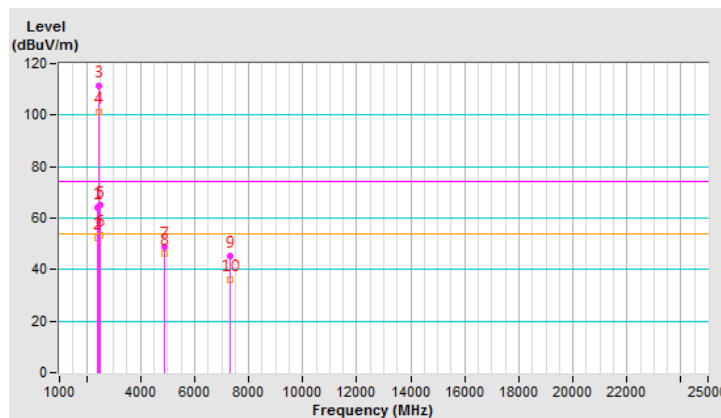


|         |                 |         |                                                |
|---------|-----------------|---------|------------------------------------------------|
| 操作模式：   | 發射              | 調變技術：   | OFDM                                           |
| 基本波頻率：  | CH 9：2452 MHz   | 測試儀器：   | (PK) RB=1MHz, VB=3MHz<br>(AV) RB=1MHz, VB=10Hz |
| 量測場地溫度： | 22°C            | 量測場地濕度： | 64%RH                                          |
| 測試日期：   | 106 年 10 月 27 日 | 測試者：    | 陳志毅                                            |

| ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M |             |                         |                |             |                    |                      |                  |                          |
|-----------------------------------------------------|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| NO.                                                 | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
| 1                                                   | *2452.00    | 97.3 PK                 |                |             | 1.10 H             | 106                  | 98.4             | -1.1                     |
| 2                                                   | *2452.00    | 86.9 AV                 |                |             | 1.10 H             | 106                  | 88.0             | -1.1                     |
| 3                                                   | 2500.00     | 57.3 PK                 | 74.0           | -16.7       | 1.10 H             | 106                  | 58.2             | -0.9                     |
| 4                                                   | 2500.00     | 45.1 AV                 | 54.0           | -8.9        | 1.10 H             | 106                  | 46.0             | -0.9                     |
| 5                                                   | 4904.00     | 43.1 PK                 | 74.0           | -30.9       | 1.09 H             | 81                   | 39.6             | 3.5                      |
| 6                                                   | 4904.00     | 38.6 AV                 | 54.0           | -15.4       | 1.09 H             | 81                   | 35.1             | 3.5                      |
| 7                                                   | 7356.00     | 45.7 PK                 | 74.0           | -28.3       | 1.24 H             | 248                  | 35.8             | 9.9                      |
| 8                                                   | 7356.00     | 36.4 AV                 | 54.0           | -17.6       | 1.24 H             | 248                  | 26.5             | 9.9                      |
| 9                                                   | #9808.00    | -                       | -              | -           | -                  | -                    | -                | -                        |
| 10                                                  | 12260.00    | -                       | -              | -           | -                  | -                    | -                | -                        |
| 11                                                  | #14712.00   | -                       | -              | -           | -                  | -                    | -                | -                        |
| 12                                                  | #17164.00   | -                       | -              | -           | -                  | -                    | -                | -                        |
| 13                                                  | 19616.00    | -                       | -              | -           | -                  | -                    | -                | -                        |
| 14                                                  | 22068.00    | -                       | -              | -           | -                  | -                    | -                | -                        |
| 15                                                  | #24520.00   | -                       | -              | -           | -                  | -                    | -                | -                        |

#### REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

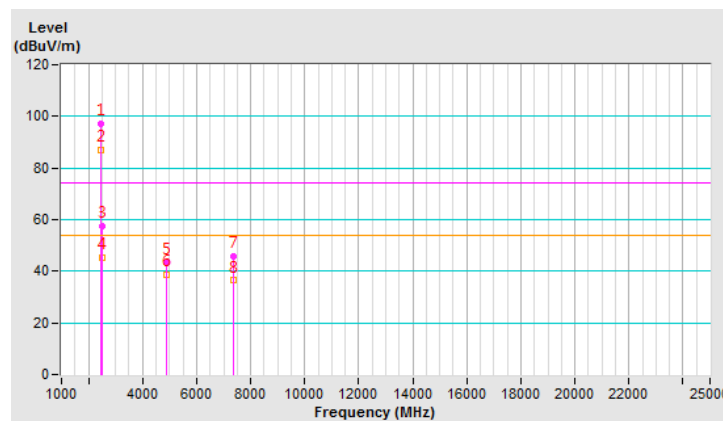


|         |                 |         |                                                |
|---------|-----------------|---------|------------------------------------------------|
| 操作模式：   | 發射              | 調變技術：   | OFDM                                           |
| 基本波頻率：  | CH 9：2452 MHz   | 測試儀器：   | (PK) RB=1MHz, VB=3MHz<br>(AV) RB=1MHz, VB=10Hz |
| 量測場地溫度： | 22°C            | 量測場地濕度： | 64%RH                                          |
| 測試日期：   | 106 年 10 月 27 日 | 測試者：    | 陳志毅                                            |

| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M |             |                         |                |             |                    |                      |                  |                          |
|---------------------------------------------------|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| NO.                                               | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
| 1                                                 | *2452.00    | 105.9 PK                |                |             | 1.77 V             | 181                  | 107.0            | -1.1                     |
| 2                                                 | *2452.00    | 95.3 AV                 |                |             | 1.77 V             | 181                  | 96.4             | -1.1                     |
| 3                                                 | 2500.00     | 62.9 PK                 | 74.0           | -11.1       | 1.77 V             | 181                  | 63.8             | -0.9                     |
| 4                                                 | 2500.00     | 52.8 AV                 | 54.0           | -1.2        | 1.77 V             | 181                  | 53.7             | -0.9                     |
| 5                                                 | 4904.00     | 43.2 PK                 | 74.0           | -30.8       | 1.70 V             | 218                  | 39.7             | 3.5                      |
| 6                                                 | 4904.00     | 39.2 AV                 | 54.0           | -14.8       | 1.70 V             | 218                  | 35.7             | 3.5                      |
| 7                                                 | 7356.00     | 45.7 PK                 | 74.0           | -28.3       | 1.39 V             | 224                  | 35.8             | 9.9                      |
| 8                                                 | 7356.00     | 36.0 AV                 | 54.0           | -18.0       | 1.39 V             | 224                  | 26.1             | 9.9                      |
| 9                                                 | #9808.00    | -                       | -              | -           | -                  | -                    | -                | -                        |
| 10                                                | 12260.00    | -                       | -              | -           | -                  | -                    | -                | -                        |
| 11                                                | #14712.00   | -                       | -              | -           | -                  | -                    | -                | -                        |
| 12                                                | #17164.00   | -                       | -              | -           | -                  | -                    | -                | -                        |
| 13                                                | 19616.00    | -                       | -              | -           | -                  | -                    | -                | -                        |
| 14                                                | 22068.00    | -                       | -              | -           | -                  | -                    | -                | -                        |
| 15                                                | #24520.00   | -                       | -              | -           | -                  | -                    | -                | -                        |

#### REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

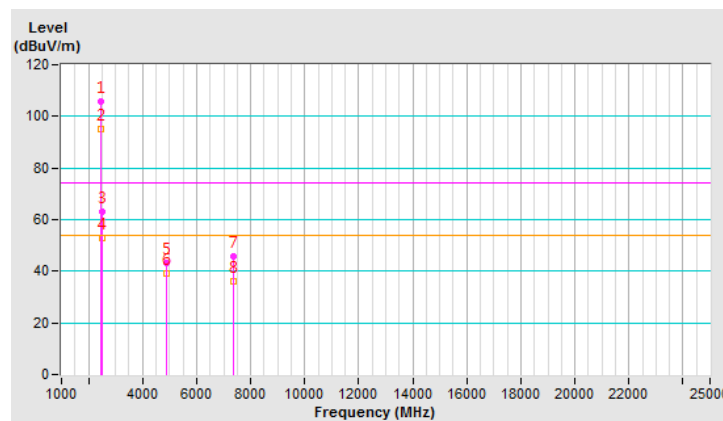


#### 4.6.2 接收諧波

|         |                 |         |                                                |
|---------|-----------------|---------|------------------------------------------------|
| 操作模式：   | 接收              |         |                                                |
| 基本波頻率：  | CH 1 : 2412 MHz | 測試儀器：   | (PK) RB=1MHz, VB=3MHz<br>(AV) RB=1MHz, VB=3MHz |
| 量測場地溫度： | 22°C            | 量測場地濕度： | 70%RH                                          |
| 測試日期：   | 105 年 10 月 7 日  | 測試者：    | 鄭樹營                                            |

| ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M |             |                         |                |             |                    |                      |                  |                          |
|-----------------------------------------------------|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| NO.                                                 | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
| 1                                                   | 1608.00     | 49.1 PK                 | 74.0           | -24.9       | 1.75 H             | 134                  | 57.7             | -8.6                     |
| 2                                                   | 1608.00     | 37.2 AV                 | 54.0           | -16.8       | 1.75 H             | 134                  | 45.8             | -8.6                     |
| 3                                                   | 3216.00     | 50.5 PK                 | 74.0           | -23.5       | 1.24 H             | 95                   | 54.1             | -3.6                     |
| 4                                                   | 3216.00     | 39.8 AV                 | 54.0           | -14.2       | 1.24 H             | 95                   | 43.4             | -3.6                     |

#### REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

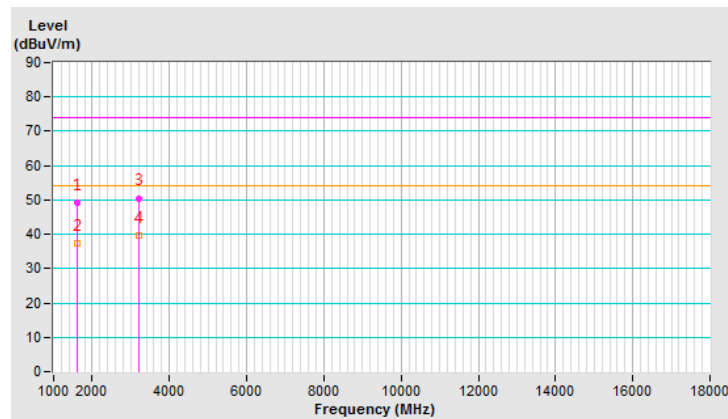


|         |                |         |                                                |
|---------|----------------|---------|------------------------------------------------|
| 操作模式：   | 接收             |         |                                                |
| 基本波頻率：  | CH 1：2412 MHz  | 測試儀器：   | (PK) RB=1MHz, VB=3MHz<br>(AV) RB=1MHz, VB=3MHz |
| 量測場地溫度： | 22°C           | 量測場地濕度： | 70%RH                                          |
| 測試日期：   | 105 年 10 月 7 日 | 測試者：    | 鄭樹營                                            |

| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M |                |                               |                   |                |                          |                            |                        |                                |
|---------------------------------------------------|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| NO.                                               | FREQ.<br>(MHz) | EMISSION<br>LEVEL<br>(dBuV/m) | LIMIT<br>(dBuV/m) | MARGIN<br>(dB) | ANTENNA<br>HEIGHT<br>(m) | TABLE<br>ANGLE<br>(Degree) | RAW<br>VALUE<br>(dBuV) | CORRECTION<br>FACTOR<br>(dB/m) |
| 1                                                 | 1608.00        | 49.2 PK                       | 74.0              | -24.8          | 1.45 V                   | 100                        | 57.8                   | -8.6                           |
| 2                                                 | 1608.00        | 37.1 AV                       | 54.0              | -16.9          | 1.45 V                   | 100                        | 45.7                   | -8.6                           |
| 3                                                 | 3216.00        | 50.4 PK                       | 74.0              | -23.6          | 2.12 V                   | 302                        | 54.0                   | -3.6                           |
| 4                                                 | 3216.00        | 39.8 AV                       | 54.0              | -14.2          | 2.12 V                   | 302                        | 43.4                   | -3.6                           |

#### REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

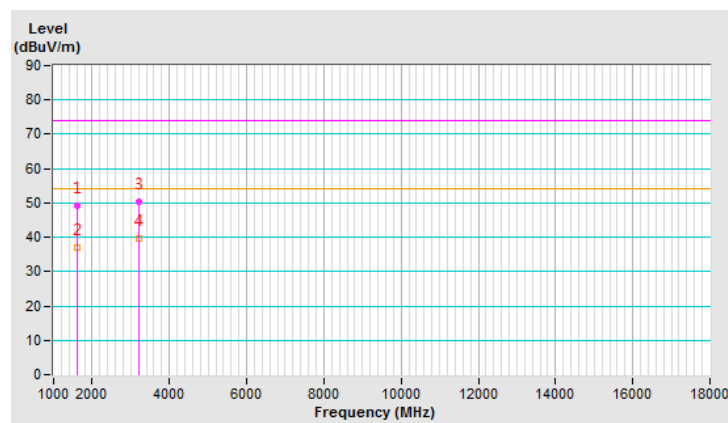


|         |                |         |                                                |
|---------|----------------|---------|------------------------------------------------|
| 操作模式：   | 接收             |         |                                                |
| 基本波頻率：  | CH 6：2437 MHz  | 測試儀器：   | (PK) RB=1MHz, VB=3MHz<br>(AV) RB=1MHz, VB=3MHz |
| 量測場地溫度： | 22°C           | 量測場地濕度： | 70%RH                                          |
| 測試日期：   | 105 年 10 月 7 日 | 測試者：    | 鄭樹營                                            |

| ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M |                |                               |                   |                |                          |                            |                        |                                |
|-----------------------------------------------------|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| NO.                                                 | FREQ.<br>(MHz) | EMISSION<br>LEVEL<br>(dBuV/m) | LIMIT<br>(dBuV/m) | MARGIN<br>(dB) | ANTENNA<br>HEIGHT<br>(m) | TABLE<br>ANGLE<br>(Degree) | RAW<br>VALUE<br>(dBuV) | CORRECTION<br>FACTOR<br>(dB/m) |
| 1                                                   | 1624.67        | 49.4 PK                       | 74.0              | -24.6          | 1.75 H                   | 147                        | 58.0                   | -8.6                           |
| 2                                                   | 1624.67        | 37.3 AV                       | 54.0              | -16.7          | 1.75 H                   | 147                        | 45.9                   | -8.6                           |
| 3                                                   | 3249.33        | 50.2 PK                       | 74.0              | -23.8          | 1.20 H                   | 107                        | 53.8                   | -3.6                           |
| 4                                                   | 3249.33        | 39.3 AV                       | 54.0              | -14.7          | 1.20 H                   | 107                        | 42.9                   | -3.6                           |

#### REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

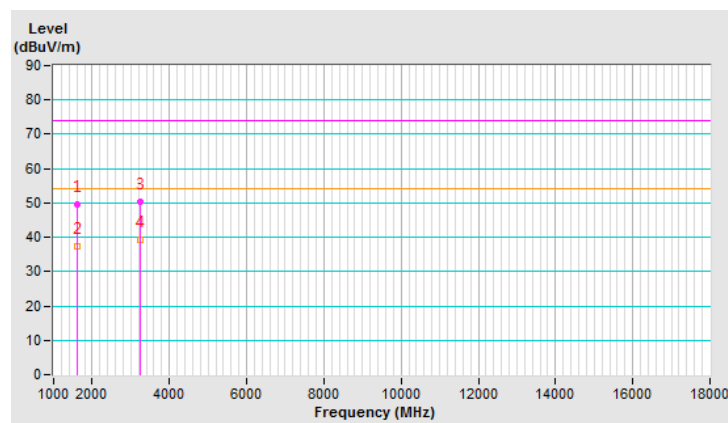


|         |                |         |                                                |
|---------|----------------|---------|------------------------------------------------|
| 操作模式：   | 接收             |         |                                                |
| 基本波頻率：  | CH 6：2437 MHz  | 測試儀器：   | (PK) RB=1MHz, VB=3MHz<br>(AV) RB=1MHz, VB=3MHz |
| 量測場地溫度： | 22°C           | 量測場地濕度： | 70%RH                                          |
| 測試日期：   | 105 年 10 月 7 日 | 測試者：    | 鄭樹營                                            |

| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M |                |                               |                   |                |                          |                            |                        |                                |
|---------------------------------------------------|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| NO.                                               | FREQ.<br>(MHz) | EMISSION<br>LEVEL<br>(dBuV/m) | LIMIT<br>(dBuV/m) | MARGIN<br>(dB) | ANTENNA<br>HEIGHT<br>(m) | TABLE<br>ANGLE<br>(Degree) | RAW<br>VALUE<br>(dBuV) | CORRECTION<br>FACTOR<br>(dB/m) |
| 1                                                 | 1624.67        | 48.9 PK                       | 74.0              | -25.1          | 1.49 V                   | 100                        | 57.5                   | -8.6                           |
| 2                                                 | 1624.67        | 36.8 AV                       | 54.0              | -17.2          | 1.49 V                   | 100                        | 45.4                   | -8.6                           |
| 3                                                 | 3249.33        | 50.3 PK                       | 74.0              | -23.7          | 2.11 V                   | 305                        | 53.9                   | -3.6                           |
| 4                                                 | 3249.33        | 39.6 AV                       | 54.0              | -14.4          | 2.11 V                   | 305                        | 43.2                   | -3.6                           |

#### REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

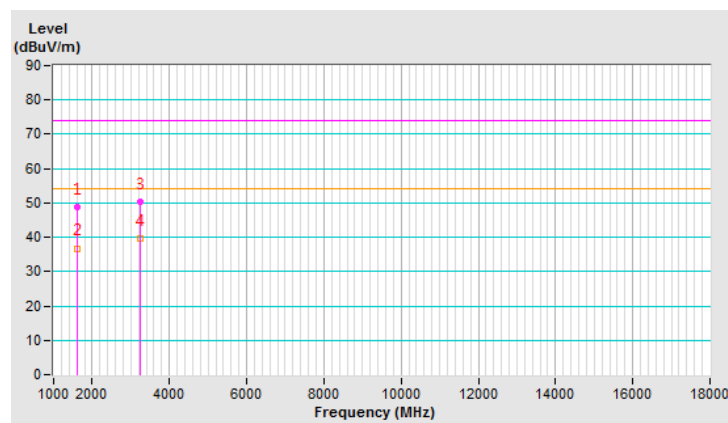


|         |                |         |                                                |
|---------|----------------|---------|------------------------------------------------|
| 操作模式：   | 接收             |         |                                                |
| 基本波頻率：  | CH 11：2462 MHz | 測試儀器：   | (PK) RB=1MHz, VB=3MHz<br>(AV) RB=1MHz, VB=3MHz |
| 量測場地溫度： | 22°C           | 量測場地濕度： | 70%RH                                          |
| 測試日期：   | 105 年 10 月 7 日 | 測試者：    | 鄭樹營                                            |

| ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M |                |                               |                   |                |                          |                            |                        |                                |
|-----------------------------------------------------|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| NO.                                                 | FREQ.<br>(MHz) | EMISSION<br>LEVEL<br>(dBuV/m) | LIMIT<br>(dBuV/m) | MARGIN<br>(dB) | ANTENNA<br>HEIGHT<br>(m) | TABLE<br>ANGLE<br>(Degree) | RAW<br>VALUE<br>(dBuV) | CORRECTION<br>FACTOR<br>(dB/m) |
| 1                                                   | 1641.33        | 48.7 PK                       | 74.0              | -25.3          | 1.77 H                   | 147                        | 57.3                   | -8.6                           |
| 2                                                   | 1641.33        | 36.9 AV                       | 54.0              | -17.1          | 1.77 H                   | 147                        | 45.5                   | -8.6                           |
| 3                                                   | 3282.67        | 50.6 PK                       | 74.0              | -23.4          | 1.26 H                   | 82                         | 54.2                   | -3.6                           |
| 4                                                   | 3282.67        | 39.8 AV                       | 54.0              | -14.2          | 1.26 H                   | 82                         | 43.4                   | -3.6                           |

#### REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

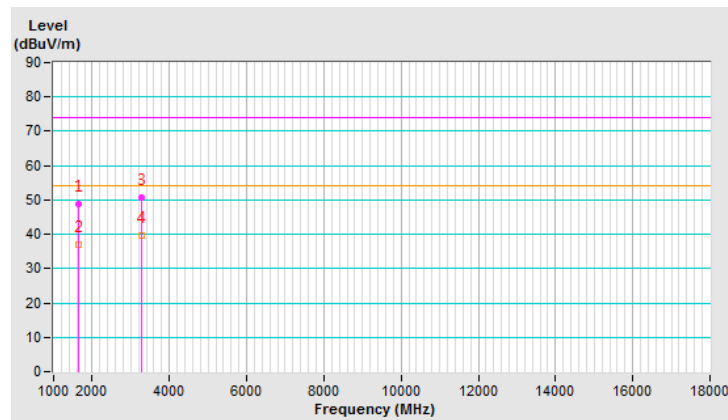


|         |                |         |                                                |
|---------|----------------|---------|------------------------------------------------|
| 操作模式：   | 接收             |         |                                                |
| 基本波頻率：  | CH 11：2462 MHz | 測試儀器：   | (PK) RB=1MHz, VB=3MHz<br>(AV) RB=1MHz, VB=3MHz |
| 量測場地溫度： | 22°C           | 量測場地濕度： | 70%RH                                          |
| 測試日期：   | 105 年 10 月 7 日 | 測試者：    | 鄭樹營                                            |

| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M |             |                         |                |             |                    |                      |                  |                          |
|---------------------------------------------------|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| NO.                                               | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
| 1                                                 | 1641.33     | 49.1 PK                 | 74.0           | -24.9       | 1.50 V             | 108                  | 57.7             | -8.6                     |
| 2                                                 | 1641.33     | 37.0 AV                 | 54.0           | -17.0       | 1.50 V             | 108                  | 45.6             | -8.6                     |
| 3                                                 | 3282.67     | 50.9 PK                 | 74.0           | -23.1       | 2.18 V             | 293                  | 54.5             | -3.6                     |
| 4                                                 | 3282.67     | 40.3 AV                 | 54.0           | -13.7       | 2.18 V             | 293                  | 43.9             | -3.6                     |

#### REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

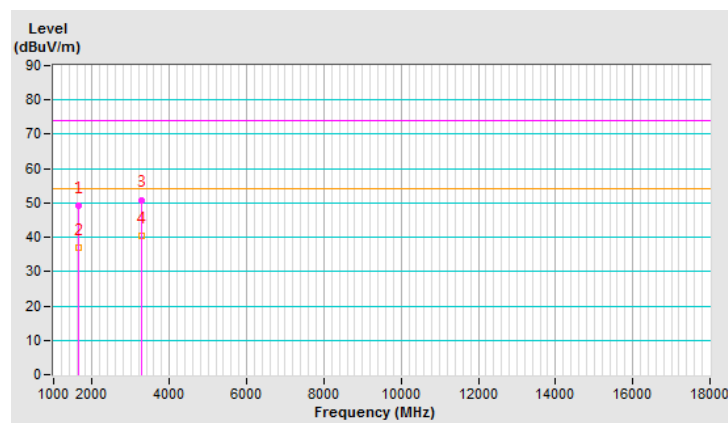

#### 4.6.3 其它不必要之訊號


##### 802.11b

|         |                |         |                   |
|---------|----------------|---------|-------------------|
| 操作模式：   | 發射接收           | 調變技術：   | DSSS              |
| 基本波頻率：  | CH 6：2437 MHz  | 測試儀器：   | (QP) RB=VB=120kHz |
| 量測場地溫度： | 24°C           | 量測場地濕度： | 68%RH             |
| 測試日期：   | 106 年 10 月 5 日 | 測試者：    | 陳志毅               |

| ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M |             |                         |                |             |                    |                      |                  |                          |
|-----------------------------------------------------|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| NO.                                                 | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
| 1                                                   | 106.70      | 36.3 QP                 | 43.5           | -7.2        | 2.00 H             | 188                  | 47.7             | -11.4                    |
| 2                                                   | 141.19      | 34.3 QP                 | 43.5           | -9.2        | 2.00 H             | 74                   | 42.7             | -8.4                     |
| 3                                                   | 207.22      | 34.3 QP                 | 43.5           | -9.2        | 1.50 H             | 178                  | 45.8             | -11.5                    |
| 4                                                   | 393.90      | 38.5 QP                 | 46.0           | -7.5        | 2.00 H             | 316                  | 44.1             | -5.6                     |
| 5                                                   | 410.92      | 37.6 QP                 | 46.0           | -8.4        | 2.00 H             | 301                  | 42.7             | -5.1                     |
| 6                                                   | 437.38      | 35.8 QP                 | 46.0           | -10.2       | 2.00 H             | 299                  | 39.7             | -3.9                     |

#### REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit of frequency range 30MHz~1000MHz.
4. Margin value = Emission Level – Limit value
5. The emission levels were very low against the limit of frequency range 9kHz~30MHz.

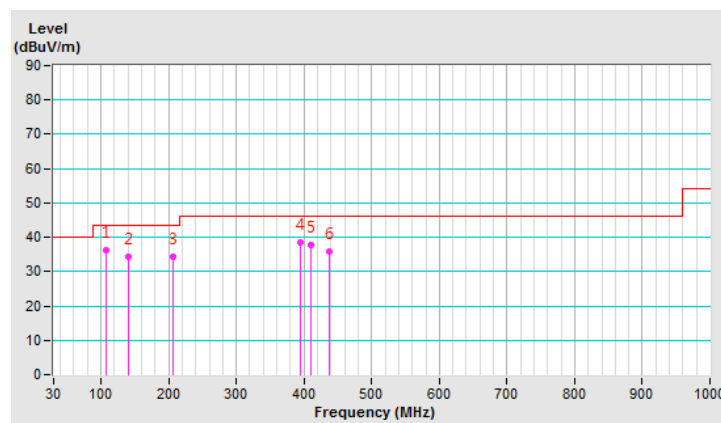


|         |                |         |                   |
|---------|----------------|---------|-------------------|
| 操作模式：   | 發射接收           | 調變技術：   | DSSS              |
| 基本波頻率：  | CH 6：2437 MHz  | 測試儀器：   | (QP) RB=VB=120kHz |
| 量測場地溫度： | 24°C           | 量測場地濕度： | 68%RH             |
| 測試日期：   | 106 年 10 月 5 日 | 測試者：    | 陳志毅               |

#### ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

| NO. | FREQ.<br>(MHz) | EMISSION<br>LEVEL<br>(dBuV/m) | LIMIT<br>(dBuV/m) | MARGIN<br>(dB) | ANTENNA<br>HEIGHT<br>(m) | TABLE<br>ANGLE<br>(Degree) | RAW<br>VALUE<br>(dBuV) | CORRECTION<br>FACTOR<br>(dB/m) |
|-----|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| 1   | 44.67          | 35.5 QP                       | 40.0              | -4.5           | 1.50 V                   | 303                        | 43.7                   | -8.2                           |
| 2   | 106.70         | 35.9 QP                       | 43.5              | -7.6           | 1.00 V                   | 242                        | 47.3                   | -11.4                          |
| 3   | 357.50         | 38.8 QP                       | 46.0              | -7.2           | 1.00 V                   | 310                        | 45.1                   | -6.3                           |
| 4   | 384.49         | 42.4 QP                       | 46.0              | -3.6           | 1.00 V                   | 246                        | 48.1                   | -5.7                           |
| 5   | 424.04         | 37.3 QP                       | 46.0              | -8.7           | 1.00 V                   | 261                        | 41.8                   | -4.5                           |
| 6   | 488.23         | 38.0 QP                       | 46.0              | -8.0           | 1.00 V                   | 12                         | 41.3                   | -3.3                           |

#### REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit of frequency range 30MHz~1000MHz.
4. Margin value = Emission Level – Limit value
5. The emission levels were very low against the limit of frequency range 9kHz~30MHz.

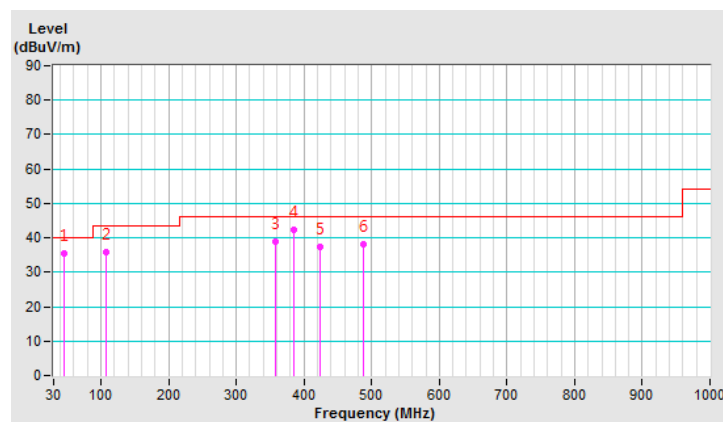

#### 4.7 量測結果判定

依據測試數據結果，符合低功率射頻電機技術規範之要求。

#### 4.8 配置照片

請參照 Test Setup Photos

## 5 電源線傳導干擾之量測

### 5.1 適用標準

請見本報告 3.1 節第 1 項的規定。

### 5.2 量測方法

將待測物置於 0.8 米高的非金屬桌面，使其操作在工作狀態，待測物電源線接至電源線阻抗穩定網路上，從測試接收機記錄頻率由 0.15MHz 至 30MHz 之間之電源線傳導放射強度。


### 5.3 量測儀器

| DESCRIPTION & MANUFACTURER                                          | MODEL NO.               | SERIAL NO. | CALIBRATED DATE | CALIBRATED UNTIL |
|---------------------------------------------------------------------|-------------------------|------------|-----------------|------------------|
| Test Receiver<br>R&S                                                | ESCS 30                 | 100375     | May 09, 2016    | May 08, 2017     |
| Line-Impedance<br>Stabilization Network<br>(for EUT)<br>SCHWARZBECK | NSLK-8127               | 8127-522   | Aug. 31, 2016   | Aug. 30, 2017    |
| Line-Impedance<br>Stabilization Network<br>(for Peripheral )<br>R&S | ENV216                  | 100072     | June 13, 2016   | June 12, 2017    |
| RF Cable                                                            | 5D-FB                   | COACAB-002 | Mar. 04, 2016   | Mar. 03, 2017    |
| 10 dB PAD<br>Mini-Circuits                                          | HAT-10+                 | CONATT-003 | Sep. 13, 2016   | Sep. 12, 2017    |
| 50 ohms Terminator                                                  | N/A                     | 04         | Nov. 18, 2015   | Nov. 17, 2016    |
| 50 ohms Terminator                                                  | 50                      | 3          | Oct. 21, 2015   | Oct. 20, 2016    |
| Software<br>BVADT                                                   | BVADT_Cond_<br>V7.3.7.4 | NA         | NA              | NA               |

#### Note:

1. The calibration interval of the above test instruments are 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in Shielded Room No. C.
3. The VCCI Con C Registration No. is C-3611.
4. The measurement uncertainty is 2.98 dB, which is calculated as per the document CISPR 16-4-2 This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

#### 5.4 測試配置

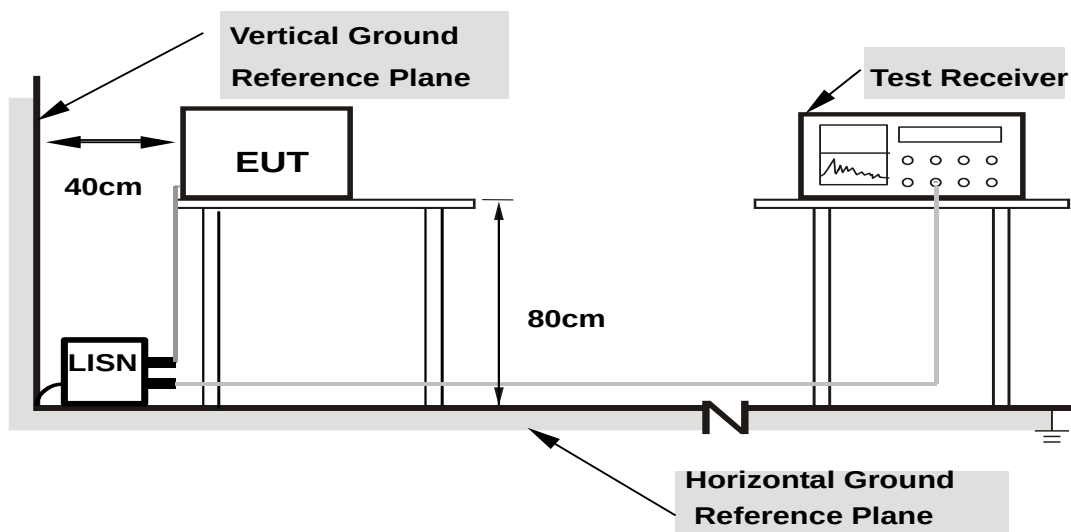

**Note: 1.Support units were connected to second LISN.**

#### 5.5 干擾值之計算

餘裕度 Margin(dB)= 結果值 Emission level (dBuV)-限制值 Limit value (dBuV)

電源傳導干擾電壓之計算公式如下

結果值 Emission level (dBuV)=校正因子 Correction Factor (dB)+儀器讀值 Reading value (dBuV)

其中校正因子 Correction Factor (dB)為：

饋線損失+電源阻抗模擬網路損失


## 5.6 量測結果 (模式一)

|       |               |        |                 |
|-------|---------------|--------|-----------------|
| 操作模式  | 發射            | 測試日期   | 105 年 10 月 12 日 |
| 基本波頻率 | CH 6: 2437MHz | 量測場地溫度 | 25°C            |
| 調變技術  | DSSS          | 量測場地濕度 | 75%RH           |
| 測試者   | 李慶貫           | 測試模式   | 一               |

|          |       | 6 dB Bandwidth: 9kHz |       |           |       | PHASE: LINE (L) |       |        |        |
|----------|-------|----------------------|-------|-----------|-------|-----------------|-------|--------|--------|
| 輻射頻率     | 校正因子  | 儀器讀值                 |       | 結果值       |       | 限制值             |       | 餘裕度    |        |
| [MHz]    | [dB]  | [dB (uV)]            |       | [dB (uV)] |       | [dB (uV)]       |       | [dB]   |        |
|          |       | Q.P.                 | AV.   | Q.P.      | AV.   | Q.P.            | AV.   | Q.P.   | AV.    |
| 0.15000  | 10.14 | 33.86                | 21.72 | 44.00     | 31.86 | 66.00           | 56.00 | -22.00 | -24.14 |
| 0.18906  | 10.12 | 30.20                | 16.55 | 40.32     | 26.67 | 64.08           | 54.08 | -23.76 | -27.41 |
| 0.30234  | 10.11 | 32.88                | 26.59 | 42.99     | 36.70 | 60.18           | 50.18 | -17.19 | -13.48 |
| 6.14844  | 10.35 | 9.95                 | 2.14  | 20.30     | 12.49 | 60.00           | 50.00 | -39.70 | -37.51 |
| 9.69922  | 10.42 | 12.84                | 8.43  | 23.26     | 18.85 | 60.00           | 50.00 | -36.74 | -31.15 |
| 23.10547 | 10.92 | -0.72                | -3.89 | 10.20     | 7.03  | 60.00           | 50.00 | -49.80 | -42.97 |

### NOTE:

- 1.Q.P. and AV. are abbreviations of quasi-peak and average individually.
- 2.The emission levels of other frequencies were very low against the limit.
- 3.Margin value = Emission level - Limit value
- 4.Correction factor = Insertion loss + Cable loss
- 5.Emission Level = Correction Factor + Reading Value.

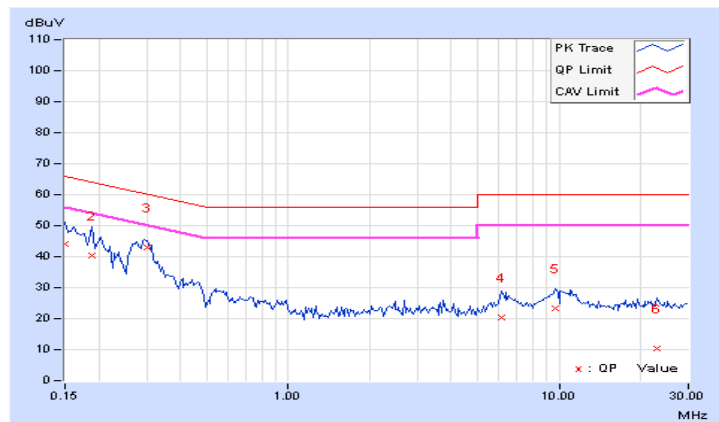


|       |               |        |                 |
|-------|---------------|--------|-----------------|
| 操作模式  | 發射            | 測試日期   | 105 年 10 月 12 日 |
| 基本波頻率 | CH 6: 2437MHz | 量測場地溫度 | 25°C            |
| 調變技術  | DSSS          | 量測場地濕度 | 75%RH           |
| 測試者   | 李慶貫           | 測試模式   | —               |

|         |       | 6 dB Bandwidth: 9kHz |       |           |       | PHASE: NEUTRAL (N) |       |        |        |
|---------|-------|----------------------|-------|-----------|-------|--------------------|-------|--------|--------|
| 輻射頻率    | 校正因子  | 儀器讀值                 |       | 結果值       |       | 限制值                |       | 餘裕度    |        |
| [MHz]   | [dB]  | [dB (uV)]            |       | [dB (uV)] |       | [dB (uV)]          |       | [dB]   |        |
|         |       | Q.P.                 | AV.   | Q.P.      | AV.   | Q.P.               | AV.   | Q.P.   | AV.    |
| 0.15000 | 10.19 | 33.88                | 21.16 | 44.07     | 31.35 | 66.00              | 56.00 | -21.93 | -24.65 |
| 0.20078 | 10.07 | 28.34                | 17.64 | 38.41     | 27.71 | 63.58              | 53.58 | -25.17 | -25.87 |
| 0.29844 | 10.08 | 34.73                | 25.44 | 44.81     | 35.52 | 60.29              | 50.29 | -15.48 | -14.77 |
| 0.73203 | 10.16 | 13.20                | 6.08  | 23.36     | 16.24 | 56.00              | 46.00 | -32.64 | -29.76 |
| 6.71875 | 10.39 | 10.50                | 2.08  | 20.89     | 12.47 | 60.00              | 50.00 | -39.11 | -37.53 |
| 9.50000 | 10.47 | 13.87                | 9.33  | 24.34     | 19.80 | 60.00              | 50.00 | -35.66 | -30.20 |

NOTE:

- 1.Q.P. and AV. are abbreviations of quasi-peak and average individually.
- 2.The emission levels of other frequencies were very low against the limit.
- 3.Margin value = Emission level - Limit value
- 4.Correction factor = Insertion loss + Cable loss
- 5.Emission Level = Correction Factor + Reading Value.

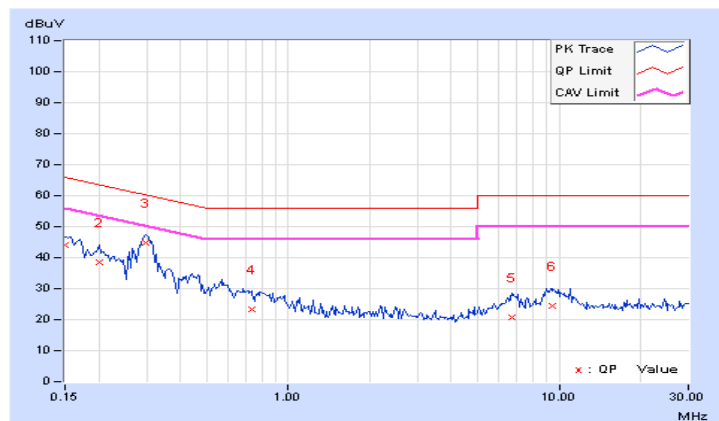


## 5.7 量測結果 (模式二)

|       |               |        |                 |
|-------|---------------|--------|-----------------|
| 操作模式  | 發射            | 測試日期   | 105 年 10 月 12 日 |
| 基本波頻率 | CH 6: 2437MHz | 量測場地溫度 | 25°C            |
| 調變技術  | DSSS          | 量測場地濕度 | 75%RH           |
| 測試者   | 李慶貫           | 測試模式   | 二               |

|          |       | 6 dB Bandwidth: 9kHz |       |           |       | PHASE: LINE (L) |       |        |        |
|----------|-------|----------------------|-------|-----------|-------|-----------------|-------|--------|--------|
| 輻射頻率     | 校正因子  | 儀器讀值                 |       | 結果值       |       | 限制值             |       | 餘裕度    |        |
| [MHz]    | [dB]  | [dB (uV)]            |       | [dB (uV)] |       | [dB (uV)]       |       | [dB]   |        |
|          |       | Q.P.                 | AV.   | Q.P.      | AV.   | Q.P.            | AV.   | Q.P.   | AV.    |
| 0.15781  | 10.14 | 39.12                | 27.18 | 49.26     | 37.32 | 65.58           | 55.58 | -16.32 | -18.26 |
| 0.17734  | 10.13 | 34.11                | 21.41 | 44.24     | 31.54 | 64.61           | 54.61 | -20.37 | -23.07 |
| 0.48203  | 10.11 | 19.09                | 12.98 | 29.20     | 23.09 | 56.30           | 46.30 | -27.10 | -23.21 |
| 6.71875  | 10.36 | 22.49                | 18.09 | 32.85     | 28.45 | 60.00           | 50.00 | -27.15 | -21.55 |
| 14.52734 | 10.62 | 17.72                | 12.85 | 28.34     | 23.47 | 60.00           | 50.00 | -31.66 | -26.53 |
| 29.19141 | 11.14 | 18.37                | 13.24 | 29.51     | 24.38 | 60.00           | 50.00 | -30.49 | -25.62 |

### NOTE:

- 1.Q.P. and AV. are abbreviations of quasi-peak and average individually.
- 2.The emission levels of other frequencies were very low against the limit.
- 3.Margin value = Emission level - Limit value
- 4.Correction factor = Insertion loss + Cable loss
- 5.Emission Level = Correction Factor + Reading Value.

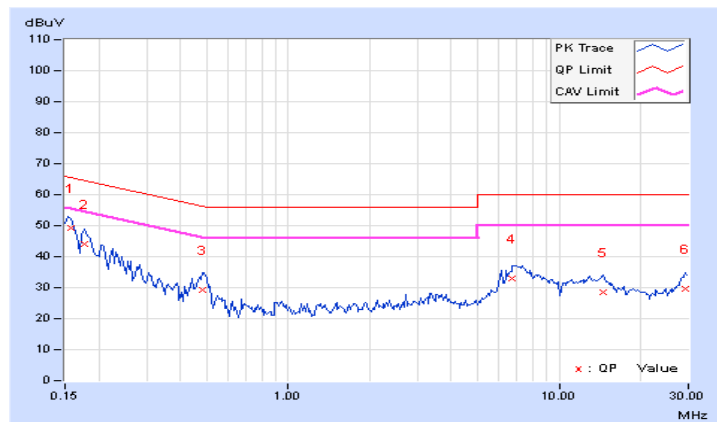


|       |               |        |                 |
|-------|---------------|--------|-----------------|
| 操作模式  | 發射            | 測試日期   | 105 年 10 月 12 日 |
| 基本波頻率 | CH 6: 2437MHz | 量測場地溫度 | 25°C            |
| 調變技術  | DSSS          | 量測場地濕度 | 75%RH           |
| 測試者   | 李慶貫           | 測試模式   | 二               |

|          |       | 6 dB Bandwidth: 9kHz |       |           |       | PHASE: NEUTRAL (N) |       |        |        |
|----------|-------|----------------------|-------|-----------|-------|--------------------|-------|--------|--------|
| 輻射頻率     | 校正因子  | 儀器讀值                 |       | 結果值       |       | 限制值                |       | 餘裕度    |        |
| [MHz]    | [dB]  | [dB (uV)]            |       | [dB (uV)] |       | [dB (uV)]          |       | [dB]   |        |
|          |       | Q.P.                 | AV.   | Q.P.      | AV.   | Q.P.               | AV.   | Q.P.   | AV.    |
| 0.16172  | 10.16 | 36.25                | 24.18 | 46.41     | 34.34 | 65.38              | 55.38 | -18.97 | -21.04 |
| 0.18516  | 10.11 | 33.28                | 22.63 | 43.39     | 32.74 | 64.25              | 54.25 | -20.86 | -21.51 |
| 0.49375  | 10.11 | 23.48                | 18.56 | 33.59     | 28.67 | 56.10              | 46.10 | -22.51 | -17.43 |
| 0.84922  | 10.18 | 13.93                | 9.17  | 24.11     | 19.35 | 56.00              | 46.00 | -31.89 | -26.65 |
| 7.68359  | 10.42 | 22.40                | 17.66 | 32.82     | 28.08 | 60.00              | 50.00 | -27.18 | -21.92 |
| 13.21484 | 10.61 | 17.11                | 12.22 | 27.72     | 22.83 | 60.00              | 50.00 | -32.28 | -27.17 |

NOTE:

- 1.Q.P. and AV. are abbreviations of quasi-peak and average individually.
- 2.The emission levels of other frequencies were very low against the limit.
- 3.Margin value = Emission level - Limit value
- 4.Correction factor = Insertion loss + Cable loss
- 5.Emission Level = Correction Factor + Reading Value.

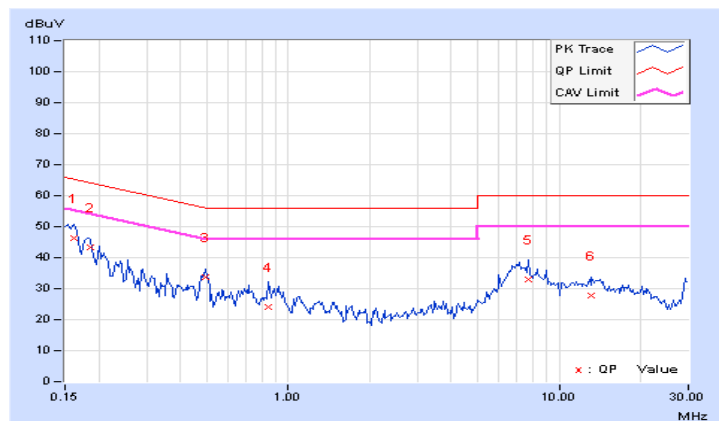

## 5.8 量測結果判定

依據測試數據結果，符合低功率射頻電機技術規範之要求。

## 5.9 配置照片

請參照 Test Setup Photos

## 6 6 dB 頻寬之要求

### 6.1 適用標準

請見本報告 3.1 節第 5 項(I)的規定。

### 6.2 量測方法


- 將待測物輸出經由衰減器接到頻譜分析儀上。
- 設定待測物處於連續發射狀態。
- 計算最大輸出功率峰值減 6dB 的最大頻率範圍。

### 6.3 量測儀器

| DESCRIPTION & MANUFACTURER | MODEL NO. | SERIAL NO. | CALIBRATED DATE | CALIBRATED UNTIL |
|----------------------------|-----------|------------|-----------------|------------------|
| Spectrum Analyzer R&S      | FSP40     | 100060     | May 11, 2016    | May 10, 2017     |

**NOTE:** 1. The test was performed in Oven room 2.  
2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

### 6.4 測試配置



## 6.5 量測結果

|        |      |        |                 |
|--------|------|--------|-----------------|
| 操作模式   | 發射   | 測試日期   | 105 年 10 月 08 日 |
| 量測場地溫度 | 25°C | 量測場地濕度 | 60%RH           |
| 測試者    | 鄭又瑋  |        |                 |

### 802.11b

| Channel | Frequency (MHz) | 6dB Bandwidth (MHz) |         |         | Minimum Limit (MHz) | Pass / Fail |
|---------|-----------------|---------------------|---------|---------|---------------------|-------------|
|         |                 | Chain 0             | Chain 1 | Chain 2 |                     |             |
| 1       | 2412            | 8.15                | 8.13    | 8.15    | 0.5                 | PASS        |
| 6       | 2437            | 8.62                | 8.62    | 8.62    | 0.5                 | PASS        |
| 11      | 2462            | 8.13                | 8.13    | 8.55    | 0.5                 | PASS        |

### 802.11g

| Channel | Frequency (MHz) | 6dB Bandwidth (MHz) |         |         | Minimum Limit (MHz) | Pass / Fail |
|---------|-----------------|---------------------|---------|---------|---------------------|-------------|
|         |                 | Chain 0             | Chain 1 | Chain 2 |                     |             |
| 1       | 2412            | 16.47               | 16.48   | 16.46   | 0.5                 | PASS        |
| 6       | 2437            | 16.44               | 16.46   | 16.42   | 0.5                 | PASS        |
| 11      | 2462            | 16.48               | 16.43   | 16.45   | 0.5                 | PASS        |


### 802.11n (HT20)

| Channel | Frequency (MHz) | 6dB Bandwidth (MHz) |         |         | Minimum Limit (MHz) | Pass / Fail |
|---------|-----------------|---------------------|---------|---------|---------------------|-------------|
|         |                 | Chain 0             | Chain 1 | Chain 2 |                     |             |
| 1       | 2412            | 17.64               | 17.62   | 17.65   | 0.5                 | Pass        |
| 6       | 2437            | 17.61               | 17.65   | 17.66   | 0.5                 | Pass        |
| 11      | 2462            | 17.65               | 17.69   | 17.68   | 0.5                 | Pass        |

### 802.11n (HT40)

| Channel | Frequency (MHz) | 6dB Bandwidth (MHz) |         |         | Minimum Limit (MHz) | Pass / Fail |
|---------|-----------------|---------------------|---------|---------|---------------------|-------------|
|         |                 | Chain 0             | Chain 1 | Chain 2 |                     |             |
| 3       | 2422            | 36.16               | 35.98   | 35.87   | 0.5                 | Pass        |
| 6       | 2437            | 36.43               | 36.01   | 35.88   | 0.5                 | Pass        |
| 9       | 2452            | 36.18               | 36.46   | 35.97   | 0.5                 | Pass        |

\*\*此測試圖僅放測試結果最差的頻道。

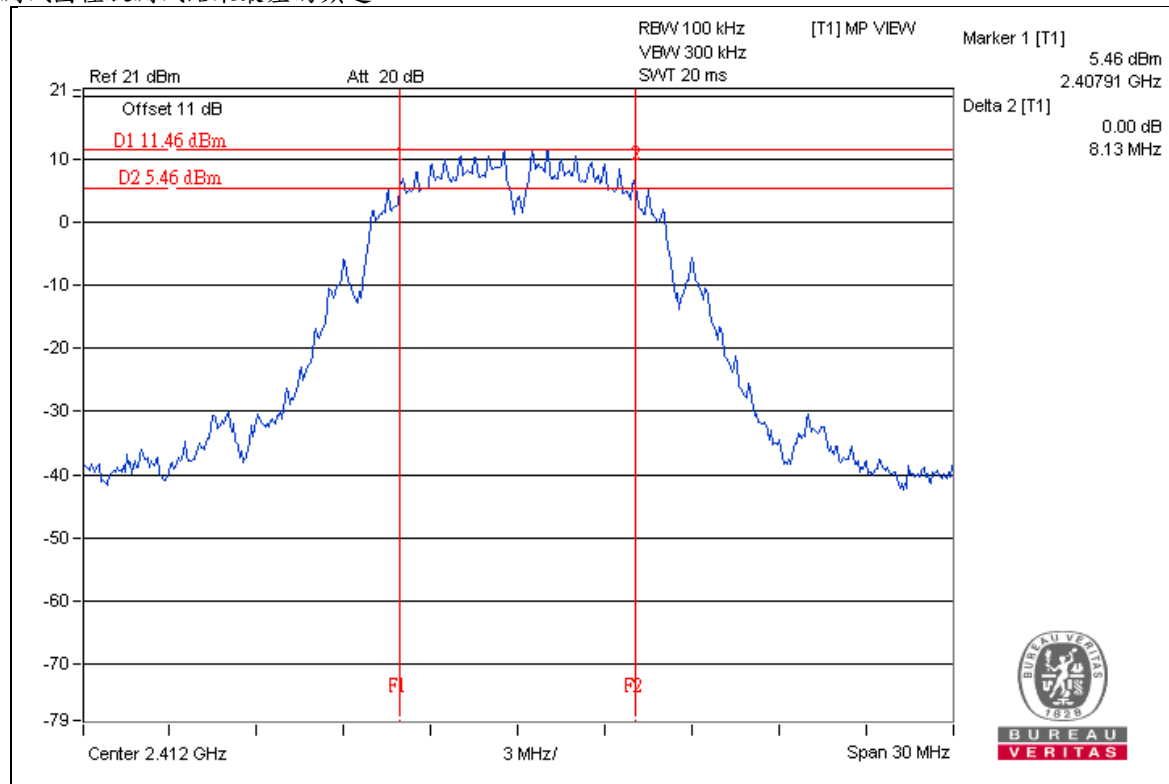

## 6.6 量測結果判定

依據測試數據結果，符合低功率射頻電機技術規範之要求。

## 7 傳導輸出功率之量測

### 7.1 適用標準

請見本報告 3.1 節第 6 項(I)及 4 項(I)的規定。

### 7.2 量測方法


- 將待測物輸出經由衰減器接到功率計上。
- 設定待測物處於連續發射狀態。
- 計算其最大輸出功率。

### 7.3 量測儀器

| DESCRIPTION & MANUFACTURER | MODEL NO. | SERIAL NO. | CALIBRATED DATE | CALIBRATED UNTIL |
|----------------------------|-----------|------------|-----------------|------------------|
| Power meter<br>Anritsu     | ML2495A   | 1014008    | May 11, 2017    | May 10, 2018     |
| Power sensor<br>Anritsu    | MA2411B   | 0917122    | May 11, 2017    | May 10, 2018     |

**NOTE:** 1. The test was performed in Oven room 2.  
2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

### 7.4 測試配置



## 7.5 量測結果

|        |      |        |                 |
|--------|------|--------|-----------------|
| 操作模式   | 發射   | 測試日期   | 106 年 10 月 27 日 |
| 量測場地溫度 | 25°C | 量測場地濕度 | 60%RH           |
| 測試者    | 陳高逸  |        |                 |

### 802.11b

| Chan. | Chan. Freq. (MHz) | Average Power (dBm) |         |         | Total Power (mW) | Total Power (dBm) | Limit (dBm) | Pass / Fail |
|-------|-------------------|---------------------|---------|---------|------------------|-------------------|-------------|-------------|
|       |                   | Chain 0             | Chain 1 | Chain 2 |                  |                   |             |             |
| 1     | 2412              | 19.64               | 19.02   | 19.20   | 255.02           | 24.07             | 30          | Pass        |
| 6     | 2437              | 22.96               | 22.95   | 22.20   | 560.898          | 27.49             | 30          | Pass        |
| 11    | 2462              | 19.45               | 19.43   | 18.65   | 249.087          | 23.96             | 30          | Pass        |

### 802.11g

| Chan. | Chan. Freq. (MHz) | Average Power (dBm) |         |         | Total Power (mW) | Total Power (dBm) | Limit (dBm) | Pass / Fail |
|-------|-------------------|---------------------|---------|---------|------------------|-------------------|-------------|-------------|
|       |                   | Chain 0             | Chain 1 | Chain 2 |                  |                   |             |             |
| 1     | 2412              | 16.77               | 16.27   | 16.12   | 130.824          | 21.17             | 30          | Pass        |
| 6     | 2437              | 22.90               | 22.77   | 22.01   | 543.073          | 27.35             | 30          | Pass        |
| 11    | 2462              | 15.35               | 15.12   | 15.07   | 98.923           | 19.95             | 30          | Pass        |

### 802.11n (HT20)

| Chan. | Chan. Freq. (MHz) | Average Power (dBm) |         |         | Total Power (mW) | Total Power (dBm) | Limit (dBm) | Pass / Fail |
|-------|-------------------|---------------------|---------|---------|------------------|-------------------|-------------|-------------|
|       |                   | Chain 0             | Chain 1 | Chain 2 |                  |                   |             |             |
| 1     | 2412              | 14.76               | 14.21   | 14.22   | 82.71            | 19.18             | 30          | Pass        |
| 6     | 2437              | 22.53               | 22.56   | 21.93   | 515.318          | 27.12             | 30          | Pass        |
| 11    | 2462              | 15.02               | 14.72   | 15.87   | 100.054          | 20.00             | 30          | Pass        |

### 802.11n (HT40)

| Chan. | Chan. Freq. (MHz) | Average Power (dBm) |         |         | Total Power (mW) | Total Power (dBm) | Limit (dBm) | Pass / Fail |
|-------|-------------------|---------------------|---------|---------|------------------|-------------------|-------------|-------------|
|       |                   | Chain 0             | Chain 1 | Chain 2 |                  |                   |             |             |
| 3     | 2422              | 7.89                | 7.52    | 10.18   | 22.224           | 13.47             | 30          | Pass        |
| 6     | 2437              | 13.66               | 13.50   | 15.60   | 81.922           | 19.13             | 30          | Pass        |
| 9     | 2452              | 9.38                | 9.36    | 11.69   | 32.057           | 15.06             | 30          | Pass        |

## 7.6 量測結果判定

依據測試數據結果，符合低功率射頻電機技術規範之要求。

## 8 功率頻譜密度之量測

### 8.1 適用標準

請見本報告 3.1 節第 7 項(I)的規定。

### 8.2 量測方法


- 將待測物之天線埠連接至測試儀器。
- 設定解析頻寬為 3 kHz，視訊頻寬為 10kHz，掃描時間設為自動，直至掃描信號穩定。
- 使用峰值功能鍵,並找到最大的峰值準位。

### 8.3 量測儀器

| DESCRIPTION & MANUFACTURER | MODEL NO. | SERIAL NO. | CALIBRATED DATE | CALIBRATED UNTIL |
|----------------------------|-----------|------------|-----------------|------------------|
| Spectrum Analyzer<br>R&S   | FSP40     | 100060     | May 11, 2016    | May 10, 2017     |

**NOTE:** 1. The test was performed in Oven room 2.  
2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

### 8.4 測試配置



## 8.5 量測結果

|        |      |        |                 |
|--------|------|--------|-----------------|
| 操作模式   | 發射   | 測試日期   | 105 年 10 月 08 日 |
| 量測場地溫度 | 25°C | 量測場地濕度 | 60%RH           |
| 測試者    | 鄭又瑋  |        |                 |

### 802.11b

| TX chain | Channel | Freq. (MHz) | PSD (dBm/3kHz) | 10 log (N=3) dB | Total PSD (dBm/3kHz) | Limit (dBm/3kHz) | Pass /Fail |
|----------|---------|-------------|----------------|-----------------|----------------------|------------------|------------|
| 0        | 1       | 2412        | -10.79         | 4.77            | -6.02                | 8.00             | Pass       |
|          | 6       | 2437        | -7.63          | 4.77            | -2.86                | 8.00             | Pass       |
|          | 11      | 2462        | -11.52         | 4.77            | -6.75                | 8.00             | Pass       |
| 1        | 1       | 2412        | -10.49         | 4.77            | -5.72                | 8.00             | Pass       |
|          | 6       | 2437        | -7.03          | 4.77            | -2.26                | 8.00             | Pass       |
|          | 11      | 2462        | -11.62         | 4.77            | -6.85                | 8.00             | Pass       |
| 2        | 1       | 2412        | -10.18         | 4.77            | -5.41                | 8.00             | Pass       |
|          | 6       | 2437        | -7.43          | 4.77            | -2.66                | 8.00             | Pass       |
|          | 11      | 2462        | -10.59         | 4.77            | -5.82                | 8.00             | Pass       |

**NOTE:** Directional gain = 5.65dBi < 6dBi , so the power density limit shall not be reduced.

### 802.11g

| TX chain | Channel | Freq. (MHz) | PSD (dBm/3kHz) | 10 log (N=3) dB | Total PSD (dBm/3kHz) | Limit (dBm/3kHz) | Pass /Fail |
|----------|---------|-------------|----------------|-----------------|----------------------|------------------|------------|
| 0        | 1       | 2412        | -15.71         | 4.77            | -10.94               | 8.00             | Pass       |
|          | 6       | 2437        | -9.57          | 4.77            | -4.80                | 8.00             | Pass       |
|          | 11      | 2462        | -16.79         | 4.77            | -12.02               | 8.00             | Pass       |
| 1        | 1       | 2412        | -15.83         | 4.77            | -11.06               | 8.00             | Pass       |
|          | 6       | 2437        | -10.03         | 4.77            | -5.26                | 8.00             | Pass       |
|          | 11      | 2462        | -17.57         | 4.77            | -12.80               | 8.00             | Pass       |
| 2        | 1       | 2412        | -15.68         | 4.77            | -10.91               | 8.00             | Pass       |
|          | 6       | 2437        | -9.73          | 4.77            | -4.96                | 8.00             | Pass       |
|          | 11      | 2462        | -17.38         | 4.77            | -12.61               | 8.00             | Pass       |

**NOTE:** Directional gain = 5.65dBi < 6dBi , so the power density limit shall not be reduced.

### 802.11n (HT20)

| TX chain | Channel | Freq. (MHz) | PSD (dBm/3kHz) | 10 log (N=3) dB | Total PSD (dBm/3kHz) | Limit (dBm/3kHz) | Pass /Fail |
|----------|---------|-------------|----------------|-----------------|----------------------|------------------|------------|
| 0        | 1       | 2412        | -18.63         | 4.77            | -13.86               | 8.00             | Pass       |
|          | 6       | 2437        | -10.67         | 4.77            | -5.90                | 8.00             | Pass       |
|          | 11      | 2462        | -17.13         | 4.77            | -12.36               | 8.00             | Pass       |
| 1        | 1       | 2412        | -18.25         | 4.77            | -13.48               | 8.00             | Pass       |
|          | 6       | 2437        | -9.86          | 4.77            | -5.09                | 8.00             | Pass       |
|          | 11      | 2462        | -17.69         | 4.77            | -12.92               | 8.00             | Pass       |
| 2        | 1       | 2412        | -18.13         | 4.77            | -13.36               | 8.00             | Pass       |
|          | 6       | 2437        | -9.82          | 4.77            | -5.05                | 8.00             | Pass       |
|          | 11      | 2462        | -17.93         | 4.77            | -13.16               | 8.00             | Pass       |


**NOTE:** Directional gain = 5.65dBi < 6dBi , so the power density limit shall not be reduced.

### 802.11n (HT40)

| TX chain | Channel | Freq. (MHz) | PSD (dBm/3kHz) | 10 log (N=3) dB | Total PSD (dBm/3kHz) | Limit (dBm/3kHz) | Pass /Fail |
|----------|---------|-------------|----------------|-----------------|----------------------|------------------|------------|
| 0        | 3       | 2422        | -23.92         | 4.77            | -19.15               | 8.00             | Pass       |
|          | 6       | 2437        | -17.90         | 4.77            | -13.13               | 8.00             | Pass       |
|          | 9       | 2452        | -22.80         | 4.77            | -18.03               | 8.00             | Pass       |
| 1        | 3       | 2422        | -23.41         | 4.77            | -18.64               | 8.00             | Pass       |
|          | 6       | 2437        | -19.84         | 4.77            | -15.07               | 8.00             | Pass       |
|          | 9       | 2452        | -22.98         | 4.77            | -18.21               | 8.00             | Pass       |
| 2        | 3       | 2422        | -24.01         | 4.77            | -19.24               | 8.00             | Pass       |
|          | 6       | 2437        | -18.61         | 4.77            | -13.84               | 8.00             | Pass       |
|          | 9       | 2452        | -22.29         | 4.77            | -17.52               | 8.00             | Pass       |

**NOTE:** Directional gain = 5.65dBi < 6dBi , so the power density limit shall not be reduced.

\*\*此測試圖僅放測試結果最差的頻道。

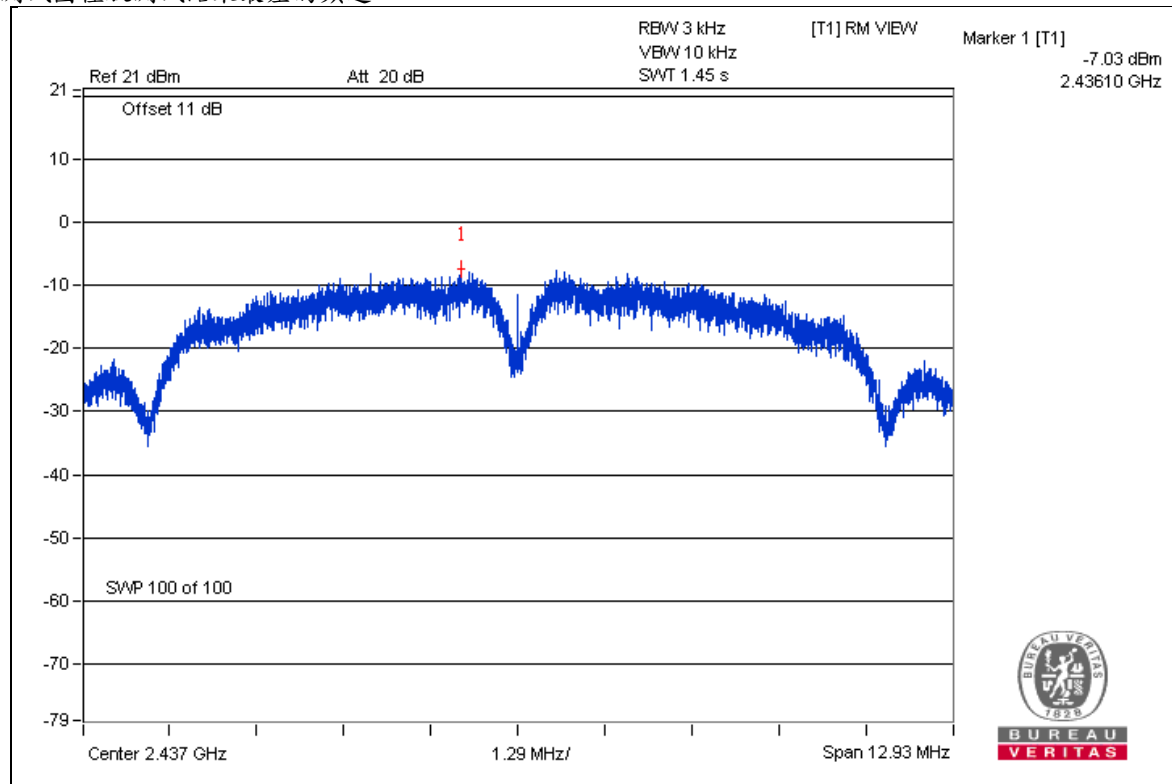

## 8.6 量測結果判定

依據測試數據結果，符合低功率射頻電機技術規範之要求。

## U-NII 頻段測試紀錄結果

### 9 帶外發射之量測

#### 9.1 適用標準

| 待測物操作頻帶                                                 | 適用標準                     |
|---------------------------------------------------------|--------------------------|
| <input checked="" type="checkbox"/> 5.15 GHz~5.25 GHz   | 請見本報告 3.1 節第 2 項(II)的規定  |
| <input checked="" type="checkbox"/> 5.25 GHz~5.35 GHz   | 請見本報告 3.1 節第 2 項(II)的規定  |
| <input checked="" type="checkbox"/> 5.470 GHz~5.725 GHz | 請見本報告 3.1 節第 2 項(II)的規定  |
| <input checked="" type="checkbox"/> 5.725 GHz~5.850 GHz | 請見本報告 3.1 節第 2 項(III)的規定 |

#### 9.2 量測方法

在電波暗室，將待測物置於 0.8 米高的非金屬桌面，使其操作在工作狀態。接收天線置於 3 米距離。桌面要 360 度旋轉，另外接收天線從離地 1 米至 4 米升降變化，以找出最大的輻射電場強度，接收天線分別置於水平、垂直極化各執行測試一次。

備註：對於 1GHz 以上場強輻射的測試，待測物則置於 1.5 米高的非金屬桌面

### 9.3 量測儀器

For 5GHz 802.11ac (VHT20), 802.11ac (VHT80) above 1GHz test:

| DESCRIPTION & MANUFACTURER                | MODEL NO.                | SERIAL NO.         | DATE OF CALIBRATION | DUE DATE OF CALIBRATION |
|-------------------------------------------|--------------------------|--------------------|---------------------|-------------------------|
| Test Receiver<br>Keysight                 | N9038A                   | MY54450088         | July 08, 2017       | July 07, 2018           |
| Horn_Antenna<br>SCHWARZBECK               | BBHA 9120D               | 9120D-783          | Dec. 27, 2016       | Dec. 26, 2017           |
| Pre-Amplifier<br>EMCI                     | EMC12630SE               | 980385             | Feb. 02, 2017       | Feb. 01, 2018           |
| RF Cable                                  | EMC104-SM-SM-1<br>200    | 160923             | Feb. 02, 2017       | Feb. 01, 2018           |
|                                           | EMC104-SM-SM-2<br>000    | 150318             | Mar. 29, 2017       | Mar. 28, 2018           |
|                                           | EMC104-SM-SM-5<br>000    | 150321             | Mar. 29, 2017       | Mar. 28, 2018           |
| Pre-Amplifier<br>EMCI                     | EMC184045SE              | 980387             | Feb. 02, 2017       | Feb. 01, 2018           |
| Horn_Antenna<br>SCHWARZBECK               | BBHA 9170                | BBHA9170608        | Dec. 15, 2016       | Dec. 14, 2017           |
| RF Cable                                  | SUCOFLEX 102             | 36432/2<br>36433/2 | Jan. 15, 2017       | Jan. 14, 2018           |
| Software                                  | ADT_Radiated_V8.<br>7.08 | NA                 | NA                  | NA                      |
| Antenna Tower & Turn<br>Table<br>Max-Full | MF-7802                  | MF780208410        | NA                  | NA                      |
| Boresight Antenna Fixture                 | FBA-01                   | FBA-SIP02          | NA                  | NA                      |

#### Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. \*The calibration interval of the above test instruments is 24 months and the calibrations are traceable to NML/ROC and NIST/USA.
3. The test was performed in 966 Chamber No. 4.
4. The CANADA Site Registration No. is 20331-2
5. Loop antenna was used for all emissions below 30 MHz.
6. The following table is for the measurement uncertainty, which is calculated as per the document CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

| Measurement                       | Value   |
|-----------------------------------|---------|
| Radiated emissions (1GHz ~6GHz)   | 5.16 dB |
| Radiated emissions (6GHz ~18GHz)  | 4.91 dB |
| Radiated emissions (18GHz ~40GHz) | 5.30 dB |

**For 5GHz other above 1GHz (UNII-1 & UNII-3) test**

| DESCRIPTION & MANUFACTURER             | MODEL NO.                                                   | SERIAL NO.                 | CALIBRATED DATE | CALIBRATED UNTIL |
|----------------------------------------|-------------------------------------------------------------|----------------------------|-----------------|------------------|
| Test Receiver<br>Keysight              | N9038A                                                      | MY54450088                 | July 20, 2016   | July 19, 2017    |
| Horn_Antenna<br>SCHWARZBECK            | BBHA 9120D                                                  | 9120D-783                  | Jan. 19, 2016   | Jan. 18, 2017    |
| Pre-Amplifier<br>Agilent               | 8449B                                                       | 3008A01922                 | Sep. 18, 2016   | Sep. 17, 2017    |
| RF Cable                               | EMC104-SM-SM-2000<br>EMC104-SM-SM-5000<br>EMC104-SM-SM-5000 | 150318<br>150323<br>150324 | Mar. 30, 2016   | Mar. 29, 2017    |
| Pre-Amplifier<br>EMCI                  | EMC184045                                                   | 980143                     | Jan. 15, 2016   | Jan. 14, 2017    |
| Horn_Antenna<br>SCHWARZBECK            | BBHA 9170                                                   | BBHA9170608                | Jan. 08, 2016   | Jan. 07, 2017    |
| RF Cable                               | SUCOFLEX 102                                                | 36432/2<br>36441/2         | Jan. 16, 2016   | Jan. 15, 2017    |
| Software                               | ADT_Radiated_V8.7.08                                        | NA                         | NA              | NA               |
| Antenna Tower & Turn Table<br>Max-Full | MF-7802                                                     | MF780208410                | NA              | NA               |
| Boresight Antenna Fixture              | FBA-01                                                      | FBA-SIP02                  | NA              | NA               |
| Spectrum Analyzer<br>R&S               | FSP40                                                       | 100060                     | May 11, 2016    | May 10, 2017     |
| Power meter<br>Anritsu                 | ML2495A                                                     | 1014008                    | May 5, 2016     | May 4, 2017      |
| Power sensor<br>Anritsu                | MA2411B                                                     | 0917122                    | May 5, 2016     | May 4, 2017      |

**Note:**

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in 966 Chamber No. 4.
3. The CANADA Site Registration No. is 20331-2
4. The following table is for the measurement uncertainty, which is calculated as per the document CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

| Measurement                       | Value   |
|-----------------------------------|---------|
| Radiated emissions (1GHz ~6GHz)   | 3.43 dB |
| Radiated emissions (6GHz ~18GHz)  | 3.49 dB |
| Radiated emissions (18GHz ~40GHz) | 4.11 dB |

**For 5GHz other above 1GHz (UNII-2A & UNII-2C) test**

| DESCRIPTION & MANUFACTURER                       | MODEL NO.                                                   | SERIAL NO.                 | CALIBRATED DATE | CALIBRATED UNTIL |
|--------------------------------------------------|-------------------------------------------------------------|----------------------------|-----------------|------------------|
| Test Receiver<br>Keysight                        | N9038A                                                      | MY54450088                 | July 20, 2016   | July 19, 2017    |
| Horn_Antenna<br>SCHWARZBECK                      | BBHA 9120D                                                  | 9120D-783                  | Jan. 19, 2016   | Jan. 18, 2017    |
| Pre-Amplifier<br>Agilent                         | 8449B                                                       | 3008A01922                 | Sep. 18, 2016   | Sep. 17, 2017    |
| RF Cable                                         | EMC104-SM-SM-2000<br>EMC104-SM-SM-5000<br>EMC104-SM-SM-5000 | 150318<br>150323<br>150324 | Mar. 30, 2016   | Mar. 29, 2017    |
| Pre-Amplifier<br>EMCI                            | EMC184045                                                   | 980143                     | Jan. 15, 2016   | Jan. 14, 2017    |
| Horn_Antenna<br>SCHWARZBECK                      | BBHA 9170                                                   | BBHA9170608                | Jan. 08, 2016   | Jan. 07, 2017    |
| RF Cable                                         | SUCOFLEX 102                                                | 36432/2<br>36441/2         | Jan. 16, 2016   | Jan. 15, 2017    |
| Software                                         | ADT_Radiated_V8.7.08                                        | NA                         | NA              | NA               |
| Antenna Tower & Turn Table<br>Max-Full           | MF-7802                                                     | MF780208410                | NA              | NA               |
| Boresight Antenna Fixture                        | FBA-01                                                      | FBA-SIP02                  | NA              | NA               |
| Spectrum Analyzer<br>R&S                         | FSv40                                                       | 100964                     | June 28, 2016   | June 27, 2017    |
| Power meter<br>Anritsu                           | ML2495A                                                     | 1014008                    | May 5, 2016     | May 4, 2017      |
| Power sensor<br>Anritsu                          | MA2411B                                                     | 0917122                    | May 5, 2016     | May 4, 2017      |
| AC Power Source<br>Extech Electronics            | 6205                                                        | 1440452                    | NA              | NA               |
| Temperature & Humidity<br>Chamber<br>Giant Force | GTH-150-40-SP-AR                                            | MAA0812-008                | Jan. 15, 2016   | Jan. 14, 2017    |
| Digital Multimeter<br>FLUKE                      | 87III                                                       | 73680266                   | Nov. 10, 2016   | Nov. 09, 2017    |

**Note:**

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in 966 Chamber No. 4.
3. The CANADA Site Registration No. is 20331-2
4. The following table is for the measurement uncertainty, which is calculated as per the document CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

| Measurement                       | Value   |
|-----------------------------------|---------|
| Radiated emissions (1GHz ~6GHz)   | 3.43 dB |
| Radiated emissions (6GHz ~18GHz)  | 3.49 dB |
| Radiated emissions (18GHz ~40GHz) | 4.11 dB |

**For 5GHz below 1GHz test:**

| DESCRIPTION & MANUFACTURER                     | MODEL NO.                | SERIAL NO.                    | DATE OF CALIBRATION | DUE DATE OF CALIBRATION |
|------------------------------------------------|--------------------------|-------------------------------|---------------------|-------------------------|
| Test Receiver<br>Agilent                       | N9038A                   | MY50010156                    | July 12, 2017       | July 11, 2018           |
| Pre-Amplifier <sup>(*)</sup><br>EMCI           | EMC001340                | 980142                        | Jan. 20, 2016       | Jan. 19, 2018           |
| Loop Antenna <sup>(*)</sup><br>Electro-Metrics | EM-6879                  | 264                           | Dec. 16, 2016       | Dec. 15, 2018           |
| RF Cable                                       | NA                       | LOOPCAB-001<br>LOOPCAB-002    | Jan. 17, 2017       | Jan. 16, 2018           |
| Pre-Amplifier<br>Mini-Circuits                 | ZFL-1000VH2B             | AMP-ZFL-05                    | May 06, 2017        | May 05, 2018            |
| Trilog Broadband<br>Antenna<br>SCHWARZBECK     | VULB 9168                | 9168-361                      | Dec. 29, 2016       | Dec. 28, 2017           |
| RF Cable                                       | 8D                       | 966-3-1<br>966-3-2<br>966-3-3 | Apr. 01, 2017       | Mar. 31, 2018           |
| Fixed attenuator<br>Mini-Circuits              | UNAT-5+                  | PAD-3m-3-01                   | Oct. 03, 2017       | Oct. 02, 2018           |
| Software                                       | ADT_Radiated_V8.<br>7.08 | NA                            | NA                  | NA                      |
| Antenna Tower & Turn<br>Table<br>Max-Full      | MF-7802                  | MF780208406                   | NA                  | NA                      |

**Note:**

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. \*The calibration interval of the above test instruments is 24 months and the calibrations are traceable to NML/ROC and NIST/USA.
3. The test was performed in 966 Chamber No. 3.
4. The CANADA Site Registration No. is 20331-1
5. Loop antenna was used for all emissions below 30 MHz.
6. The following table is for the measurement uncertainty, which is calculated as per the document CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

| Measurement                     | Value   |
|---------------------------------|---------|
| Radiated emissions (30MHz-1GHz) | 5.32 dB |

#### 9.4 帶外發射之測試配置

同 4.4 節

#### 9.5 場強度之計算

場強之計算公式如下：

結果值 Emission level (dBuV/m)=機器讀值 Raw Value (dBuV) +校正因子 Correction Factor (dB/m)

餘裕度 Margin(dB)= 結果值 Emission level (dBuV/m)-限制值 Limit value (dBuV/m)

\*有效等向輻射功率限制值轉換場強值如下：

| Applicable To                                                                                                                                                   |                                                    | Limit                                                                                                                                                                                                        |                                                                                                                                         |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------|
| 789033 D02 General UNII Test Procedure New Rules v02r01                                                                                                         |                                                    | Field Strength at 3m                                                                                                                                                                                         |                                                                                                                                         |
|                                                                                                                                                                 |                                                    | PK:74 (dBμV/m)                                                                                                                                                                                               | AV:54 (dBμV/m)                                                                                                                          |
| 操作頻帶                                                                                                                                                            | Applicable To                                      | EIRP Limit                                                                                                                                                                                                   | Equivalent Field Strength at 3m                                                                                                         |
| 5150~5250 MHz                                                                                                                                                   | 技術規範 4.7.4.1 節                                     | PK:-27 (dBm/MHz)                                                                                                                                                                                             | PK:68.2(dBμV/m)                                                                                                                         |
| 5250~5350 MHz                                                                                                                                                   | 技術規範 4.7.4.1 節                                     |                                                                                                                                                                                                              |                                                                                                                                         |
| 5470~5725 MHz                                                                                                                                                   | 技術規範 4.7.4.1 節                                     |                                                                                                                                                                                                              |                                                                                                                                         |
| 5725~5850 MHz                                                                                                                                                   | <input checked="" type="checkbox"/> 技術規範 4.7.4.2 節 | PK:-27 (dBm/MHz) <sup>*1</sup><br>PK:10 (dBm/MHz) <sup>*2</sup><br>PK:15.6 (dBm/MHz) <sup>*3</sup><br>PK:27 (dBm/MHz) <sup>*4</sup>                                                                          | PK: 68.2(dBμV/m) <sup>*1</sup><br>PK:105.2 (dBμV/m) <sup>*2</sup><br>PK: 110.8(dBμV/m) <sup>*3</sup><br>PK:122.2 (dBμV/m) <sup>*4</sup> |
|                                                                                                                                                                 | <input type="checkbox"/> 技術規範 4.7.4.7 節            | 適用 3.10.1.5 節帶外發射限制                                                                                                                                                                                          |                                                                                                                                         |
| <sup>*1</sup> beyond 75 MHz or more above of the band edge.<br><sup>*3</sup> below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above. |                                                    | <sup>*2</sup> below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above.<br><sup>*4</sup> from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge. |                                                                                                                                         |

#### Note:

有效等向輻射功率限制值轉換場強之公式如下：

$$E=(30PG)^{1/2}/d$$

E: 以最寬解析頻寬所測得之最大場強值，單位:V/m。

G: 發射天線相對於全向性輻射器之數值增益。

d: 測試場強的距離，單位: m。

P: 求得之功率，單位:W。

## 9.6 帶外發射之量測結果

### 9.6.1 發射諧波


#### 802.11a

|         |                |         |                                                |
|---------|----------------|---------|------------------------------------------------|
| 操作模式：   | 發射             | 調變技術：   | OFDM                                           |
| 基本波頻率：  | CH 36：5180 MHz | 測試儀器：   | (PK) RB=1MHz, VB=3MHz<br>(AV) RB=1MHz, VB=10Hz |
| 量測場地溫度： | 22°C           | 量測場地濕度： | 70%RH                                          |
| 測試日期：   | 105 年 10 月 7 日 | 測試者：    | 鄭樹營                                            |

| ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M |             |                         |                |             |                    |                      |                  |                          |
|-----------------------------------------------------|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| NO.                                                 | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
| 1                                                   | 5097.00     | 57.1 PK                 | 74.0           | -16.9       | 2.76 H             | 60                   | 55.7             | 1.4                      |
| 2                                                   | 5097.00     | 46.9 AV                 | 54.0           | -7.1        | 2.76 H             | 60                   | 45.5             | 1.4                      |
| 3                                                   | 5150.00     | 58.3 PK                 | 74.0           | -15.7       | 2.76 H             | 60                   | 56.8             | 1.5                      |
| 4                                                   | 5150.00     | 43.5 AV                 | 54.0           | -10.5       | 2.76 H             | 60                   | 42.0             | 1.5                      |
| 5                                                   | *5180.00    | 111.1 PK                |                |             | 2.76 H             | 60                   | 109.5            | 1.6                      |
| 6                                                   | *5180.00    | 101.2 AV                |                |             | 2.76 H             | 60                   | 99.6             | 1.6                      |
| 7                                                   | #10360.00   | 50.2 PK                 | 74.0           | -23.8       | 1.69 H             | 187                  | 38.7             | 11.5                     |
| 8                                                   | #10360.00   | 39.0 AV                 | 54.0           | -15.0       | 1.69 H             | 187                  | 27.5             | 11.5                     |
| 9                                                   | 15540.00    | 50.4 PK                 | 74.0           | -23.6       | 2.24 H             | 316                  | 37.3             | 13.1                     |
| 10                                                  | 15540.00    | 39.6 AV                 | 54.0           | -14.4       | 2.24 H             | 316                  | 26.5             | 13.1                     |
| 11                                                  | 20720.00    | -                       | -              | -           | -                  | -                    | -                | -                        |
| 12                                                  | #25900.00   | -                       | -              | -           | -                  | -                    | -                | -                        |
| 13                                                  | #31080.00   | -                       | -              | -           | -                  | -                    | -                | -                        |
| 14                                                  | #36260.00   | -                       | -              | -           | -                  | -                    | -                | -                        |

#### REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

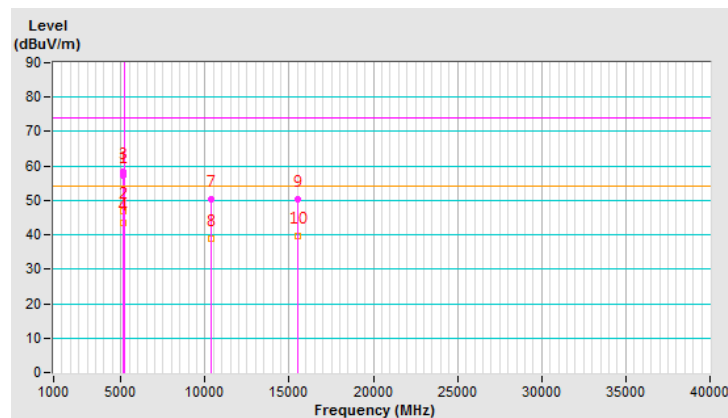


|         |                |         |                                                |
|---------|----------------|---------|------------------------------------------------|
| 操作模式：   | 發射             | 調變技術：   | OFDM                                           |
| 基本波頻率：  | CH 36：5180 MHz | 測試儀器：   | (PK) RB=1MHz, VB=3MHz<br>(AV) RB=1MHz, VB=10Hz |
| 量測場地溫度： | 22°C           | 量測場地濕度： | 70%RH                                          |
| 測試日期：   | 105 年 10 月 7 日 | 測試者：    | 鄭樹營                                            |

| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M |             |                         |                |             |                    |                      |                  |                          |
|---------------------------------------------------|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| NO.                                               | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
| 1                                                 | 5097.00     | 64.0 PK                 | 74.0           | -10.0       | 1.79 V             | 168                  | 62.6             | 1.4                      |
| 2                                                 | 5097.00     | 53.9 AV                 | 54.0           | -0.1        | 1.79 V             | 168                  | 52.5             | 1.4                      |
| 3                                                 | 5150.00     | 66.9 PK                 | 74.0           | -7.1        | 1.73 V             | 150                  | 65.4             | 1.5                      |
| 4                                                 | 5150.00     | 49.0 AV                 | 54.0           | -5.0        | 1.73 V             | 150                  | 47.5             | 1.5                      |
| 5                                                 | *5180.00    | 117.5 PK                |                |             | 1.73 V             | 150                  | 115.9            | 1.6                      |
| 6                                                 | *5180.00    | 107.7 AV                |                |             | 1.73 V             | 150                  | 106.1            | 1.6                      |
| 7                                                 | #10360.00   | 50.1 PK                 | 74.0           | -23.9       | 2.29 V             | 194                  | 38.6             | 11.5                     |
| 8                                                 | #10360.00   | 39.3 AV                 | 54.0           | -14.7       | 2.29 V             | 194                  | 27.8             | 11.5                     |
| 9                                                 | 15540.00    | 55.8 PK                 | 74.0           | -18.2       | 1.20 V             | 182                  | 42.7             | 13.1                     |
| 10                                                | 15540.00    | 41.4 AV                 | 54.0           | -12.6       | 1.20 V             | 182                  | 28.3             | 13.1                     |
| 11                                                | 20720.00    | -                       | -              | -           | -                  | -                    | -                | -                        |
| 12                                                | #25900.00   | -                       | -              | -           | -                  | -                    | -                | -                        |
| 13                                                | #31080.00   | -                       | -              | -           | -                  | -                    | -                | -                        |
| 14                                                | #36260.00   | -                       | -              | -           | -                  | -                    | -                | -                        |

#### REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

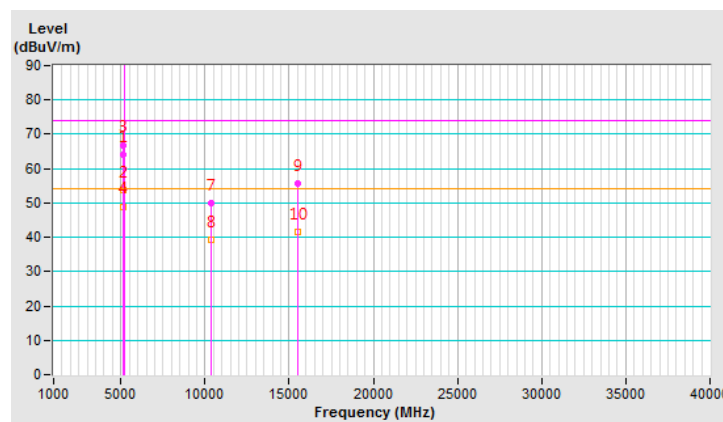


|         |                |         |                                                |
|---------|----------------|---------|------------------------------------------------|
| 操作模式：   | 發射             | 調變技術：   | OFDM                                           |
| 基本波頻率：  | CH 40：5200 MHz | 測試儀器：   | (PK) RB=1MHz, VB=3MHz<br>(AV) RB=1MHz, VB=10Hz |
| 量測場地溫度： | 22°C           | 量測場地濕度： | 70%RH                                          |
| 測試日期：   | 105 年 10 月 7 日 | 測試者：    | 鄭樹營                                            |

#### ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
|-----|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| 1   | 5121.00     | 57.1 PK                 | 74.0           | -16.9       | 2.75 H             | 58                   | 55.7             | 1.4                      |
| 2   | 5121.00     | 46.8 AV                 | 54.0           | -7.2        | 2.75 H             | 58                   | 45.4             | 1.4                      |
| 3   | *5200.00    | 110.2 PK                |                |             | 2.75 H             | 58                   | 108.5            | 1.7                      |
| 4   | *5200.00    | 100.1 AV                |                |             | 2.75 H             | 58                   | 98.4             | 1.7                      |
| 5   | #10400.00   | 49.8 PK                 | 74.0           | -24.2       | 1.63 H             | 209                  | 38.2             | 11.6                     |
| 6   | #10400.00   | 38.5 AV                 | 54.0           | -15.5       | 1.63 H             | 209                  | 26.9             | 11.6                     |
| 7   | 15600.00    | 49.9 PK                 | 74.0           | -24.1       | 2.23 H             | 291                  | 36.8             | 13.1                     |
| 8   | 15600.00    | 39.2 AV                 | 54.0           | -14.8       | 2.23 H             | 291                  | 26.1             | 13.1                     |
| 9   | 20800.00    | -                       | -              | -           | -                  | -                    | -                | -                        |
| 10  | #26000.00   | -                       | -              | -           | -                  | -                    | -                | -                        |
| 11  | 31200.00    | -                       | -              | -           | -                  | -                    | -                | -                        |
| 12  | #36400.00   | -                       | -              | -           | -                  | -                    | -                | -                        |

#### REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

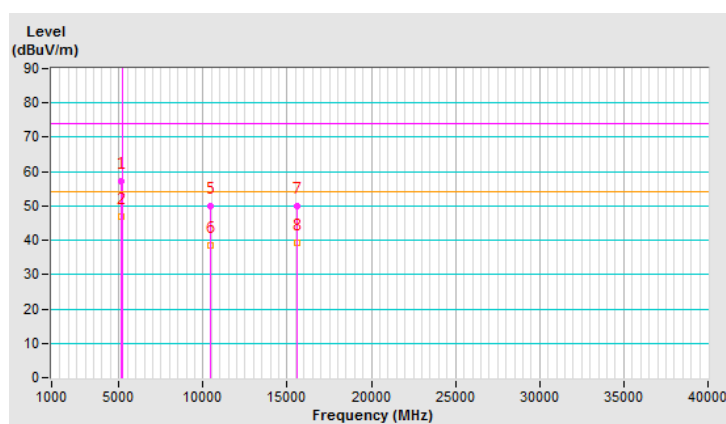


|         |                |         |                                                |
|---------|----------------|---------|------------------------------------------------|
| 操作模式：   | 發射             | 調變技術：   | OFDM                                           |
| 基本波頻率：  | CH 40：5200 MHz | 測試儀器：   | (PK) RB=1MHz, VB=3MHz<br>(AV) RB=1MHz, VB=10Hz |
| 量測場地溫度： | 22°C           | 量測場地濕度： | 70%RH                                          |
| 測試日期：   | 105 年 10 月 7 日 | 測試者：    | 鄭樹營                                            |

| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M |             |                         |                |             |                    |                      |                  |                          |
|---------------------------------------------------|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| NO.                                               | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
| 1                                                 | 5121.00     | 64.1 PK                 | 74.0           | -9.9        | 1.73 V             | 169                  | 62.7             | 1.4                      |
| 2                                                 | 5121.00     | 53.8 AV                 | 54.0           | -0.2        | 1.73 V             | 169                  | 52.4             | 1.4                      |
| 3                                                 | *5200.00    | 115.9 PK                |                |             | 1.73 V             | 169                  | 114.2            | 1.7                      |
| 4                                                 | *5200.00    | 106.7 AV                |                |             | 1.73 V             | 169                  | 105.0            | 1.7                      |
| 5                                                 | #10400.00   | 50.5 PK                 | 74.0           | -23.5       | 2.23 V             | 189                  | 38.9             | 11.6                     |
| 6                                                 | #10400.00   | 39.6 AV                 | 54.0           | -14.4       | 2.23 V             | 189                  | 28.0             | 11.6                     |
| 7                                                 | 15600.00    | 55.6 PK                 | 74.0           | -18.4       | 1.23 V             | 173                  | 42.5             | 13.1                     |
| 8                                                 | 15600.00    | 41.4 AV                 | 54.0           | -12.6       | 1.23 V             | 173                  | 28.3             | 13.1                     |
| 9                                                 | 20800.00    | -                       | -              | -           | -                  | -                    | -                | -                        |
| 10                                                | #26000.00   | -                       | -              | -           | -                  | -                    | -                | -                        |
| 11                                                | 31200.00    | -                       | -              | -           | -                  | -                    | -                | -                        |
| 12                                                | #36400.00   | -                       | -              | -           | -                  | -                    | -                | -                        |

#### REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

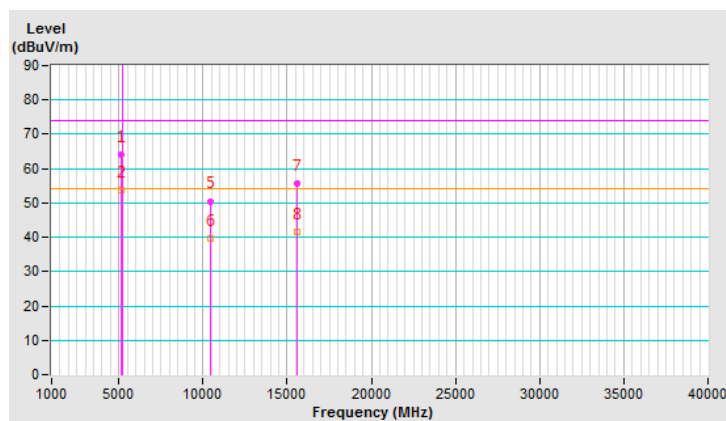


|         |                |         |                                                |
|---------|----------------|---------|------------------------------------------------|
| 操作模式：   | 發射             | 調變技術：   | OFDM                                           |
| 基本波頻率：  | CH 48：5240 MHz | 測試儀器：   | (PK) RB=1MHz, VB=3MHz<br>(AV) RB=1MHz, VB=10Hz |
| 量測場地溫度： | 22°C           | 量測場地濕度： | 70%RH                                          |
| 測試日期：   | 105 年 10 月 7 日 | 測試者：    | 鄭樹營                                            |

#### ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
|-----|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| 1   | *5240.00    | 116.2 PK                |                |             | 2.81 H             | 62                   | 114.6            | 1.6                      |
| 2   | *5240.00    | 106.8 AV                |                |             | 2.81 H             | 62                   | 105.2            | 1.6                      |
| 3   | 5401.00     | 54.6 PK                 | 74.0           | -19.4       | 2.81 H             | 62                   | 52.5             | 2.1                      |
| 4   | 5401.00     | 44.7 AV                 | 54.0           | -9.3        | 2.81 H             | 62                   | 42.6             | 2.1                      |
| 5   | #10480.00   | 51.1 PK                 | 74.0           | -22.9       | 1.62 H             | 209                  | 39.1             | 12.0                     |
| 6   | #10480.00   | 39.6 AV                 | 54.0           | -14.4       | 1.62 H             | 209                  | 27.6             | 12.0                     |
| 7   | 15720.00    | 65.2 PK                 | 74.0           | -8.8        | 2.17 H             | 304                  | 52.0             | 13.2                     |
| 8   | 15720.00    | 50.5 AV                 | 54.0           | -3.5        | 2.17 H             | 304                  | 37.3             | 13.2                     |
| 9   | 20960.00    | -                       | -              | -           | -                  | -                    | -                | -                        |
| 10  | #26200.00   | -                       | -              | -           | -                  | -                    | -                | -                        |
| 11  | 31440.00    | -                       | -              | -           | -                  | -                    | -                | -                        |
| 12  | #36680.00   | -                       | -              | -           | -                  | -                    | -                | -                        |

#### REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

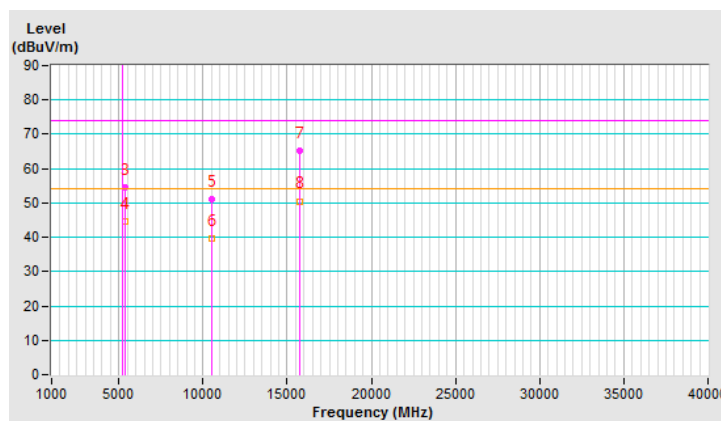


|         |                |         |                                                |
|---------|----------------|---------|------------------------------------------------|
| 操作模式：   | 發射             | 調變技術：   | OFDM                                           |
| 基本波頻率：  | CH 48：5240 MHz | 測試儀器：   | (PK) RB=1MHz, VB=3MHz<br>(AV) RB=1MHz, VB=10Hz |
| 量測場地溫度： | 22°C           | 量測場地濕度： | 70%RH                                          |
| 測試日期：   | 105 年 10 月 7 日 | 測試者：    | 鄭樹營                                            |

#### ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
|-----|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| 1   | *5240.00    | 120.9 PK                |                |             | 1.77 V             | 172                  | 119.3            | 1.6                      |
| 2   | *5240.00    | 112.0 AV                |                |             | 1.77 V             | 172                  | 110.4            | 1.6                      |
| 3   | 5401.00     | 61.2 PK                 | 74.0           | -12.8       | 1.77 V             | 172                  | 59.1             | 2.1                      |
| 4   | 5401.00     | 51.5 AV                 | 54.0           | -2.5        | 1.77 V             | 172                  | 49.4             | 2.1                      |
| 5   | #10480.00   | 55.4 PK                 | 74.0           | -18.6       | 2.28 V             | 196                  | 43.4             | 12.0                     |
| 6   | #10480.00   | 43.3 AV                 | 54.0           | -10.7       | 2.28 V             | 196                  | 31.3             | 12.0                     |
| 7   | 15720.00    | 69.4 PK                 | 74.0           | -4.6        | 1.21 V             | 168                  | 56.2             | 13.2                     |
| 8   | 15720.00    | 53.9 AV                 | 54.0           | -0.1        | 1.21 V             | 168                  | 40.7             | 13.2                     |
| 9   | 20960.00    | -                       | -              | -           | -                  | -                    | -                | -                        |
| 10  | #26200.00   | -                       | -              | -           | -                  | -                    | -                | -                        |
| 11  | 31440.00    | -                       | -              | -           | -                  | -                    | -                | -                        |
| 12  | #36680.00   | -                       | -              | -           | -                  | -                    | -                | -                        |

#### REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

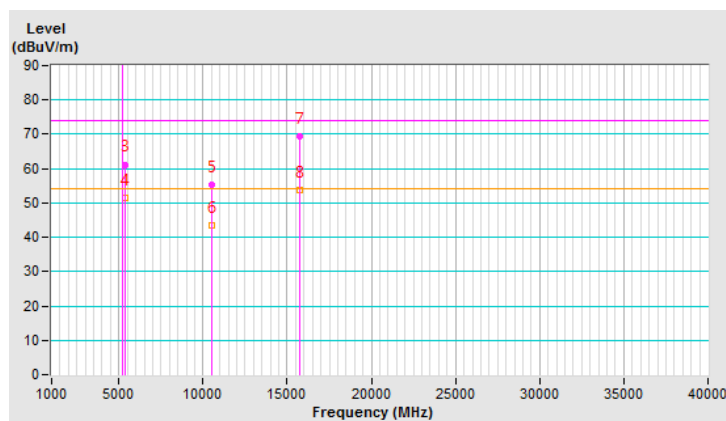


|         |                 |         |                                                |
|---------|-----------------|---------|------------------------------------------------|
| 操作模式：   | 發射              | 調變技術：   | OFDM                                           |
| 基本波頻率：  | CH 52：5260 MHz  | 測試儀器：   | (PK) RB=1MHz, VB=3MHz<br>(AV) RB=1MHz, VB=10Hz |
| 量測場地溫度： | 23℃             | 量測場地濕度： | 68%RH                                          |
| 測試日期：   | 105 年 11 月 10 日 | 測試者：    | 羅益偉                                            |

#### ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
|-----|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| 1   | 5038.00     | 50.8 PK                 | 74.0           | -23.2       | 2.94 H             | 156                  | 49.5             | 1.3                      |
| 2   | 5038.00     | 40.5 AV                 | 54.0           | -13.5       | 2.94 H             | 156                  | 39.2             | 1.3                      |
| 3   | *5260.00    | 108.4 PK                |                |             | 2.94 H             | 156                  | 106.7            | 1.7                      |
| 4   | *5260.00    | 99.2 AV                 |                |             | 2.94 H             | 156                  | 97.5             | 1.7                      |
| 5   | #10520.00   | 51.1 PK                 | 74.0           | -22.9       | 1.45 H             | 302                  | 38.8             | 12.3                     |
| 6   | #10520.00   | 38.2 AV                 | 54.0           | -15.8       | 1.45 H             | 302                  | 25.9             | 12.3                     |
| 7   | 15780.00    | 53.7 PK                 | 74.0           | -20.3       | 2.14 H             | 99                   | 40.6             | 13.1                     |
| 8   | 15780.00    | 39.9 AV                 | 54.0           | -14.1       | 2.14 H             | 99                   | 26.8             | 13.1                     |
| 9   | 21040.00    | -                       | -              | -           | -                  | -                    | -                | -                        |
| 10  | #26300.00   | -                       | -              | -           | -                  | -                    | -                | -                        |
| 11  | 31560.00    | -                       | -              | -           | -                  | -                    | -                | -                        |
| 12  | #36820.00   | -                       | -              | -           | -                  | -                    | -                | -                        |

#### REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

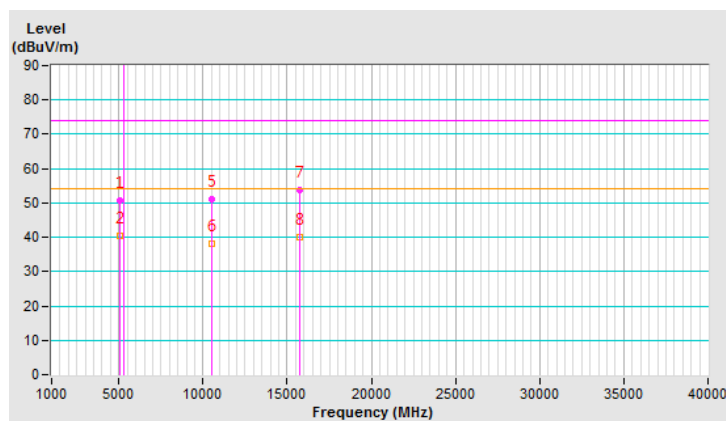


|         |                 |         |                                                |
|---------|-----------------|---------|------------------------------------------------|
| 操作模式：   | 發射              | 調變技術：   | OFDM                                           |
| 基本波頻率：  | CH 52：5260 MHz  | 測試儀器：   | (PK) RB=1MHz, VB=3MHz<br>(AV) RB=1MHz, VB=10Hz |
| 量測場地溫度： | 23℃             | 量測場地濕度： | 68%RH                                          |
| 測試日期：   | 105 年 11 月 10 日 | 測試者：    | 羅益偉                                            |

| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M |             |                         |                |             |                    |                      |                  |                          |
|---------------------------------------------------|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| NO.                                               | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
| 1                                                 | 5038.00     | 56.6 PK                 | 74.0           | -17.4       | 2.02 V             | 167                  | 55.3             | 1.3                      |
| 2                                                 | 5038.00     | 47.7 AV                 | 54.0           | -6.3        | 2.02 V             | 167                  | 46.4             | 1.3                      |
| 3                                                 | *5260.00    | 115.1 PK                |                |             | 2.02 V             | 167                  | 113.4            | 1.7                      |
| 4                                                 | *5260.00    | 105.8 AV                |                |             | 2.02 V             | 167                  | 104.1            | 1.7                      |
| 5                                                 | #10520.00   | 50.7 PK                 | 74.0           | -23.3       | 2.30 V             | 233                  | 38.4             | 12.3                     |
| 6                                                 | #10520.00   | 39.5 AV                 | 54.0           | -14.5       | 2.30 V             | 233                  | 27.2             | 12.3                     |
| 7                                                 | 15780.00    | 55.8 PK                 | 74.0           | -18.2       | 1.00 V             | 185                  | 42.7             | 13.1                     |
| 8                                                 | 15780.00    | 43.0 AV                 | 54.0           | -11.0       | 1.00 V             | 185                  | 29.9             | 13.1                     |
| 9                                                 | 21040.00    | -                       | -              | -           | -                  | -                    | -                | -                        |
| 10                                                | #26300.00   | -                       | -              | -           | -                  | -                    | -                | -                        |
| 11                                                | 31560.00    | -                       | -              | -           | -                  | -                    | -                | -                        |
| 12                                                | #36820.00   | -                       | -              | -           | -                  | -                    | -                | -                        |

#### REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

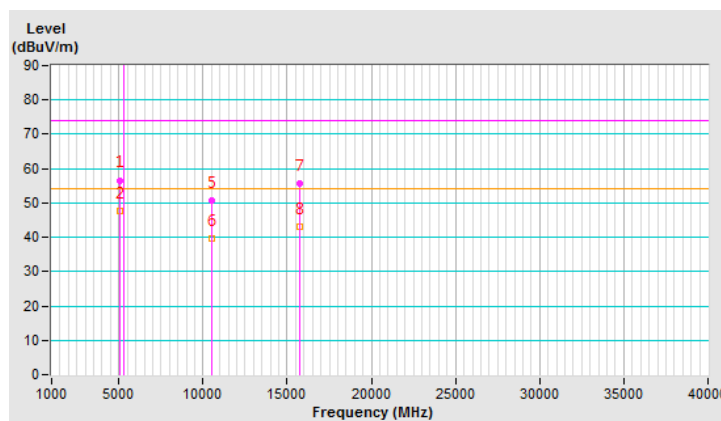


|         |                 |         |                                                |
|---------|-----------------|---------|------------------------------------------------|
| 操作模式：   | 發射              | 調變技術：   | OFDM                                           |
| 基本波頻率：  | CH 60：5300 MHz  | 測試儀器：   | (PK) RB=1MHz, VB=3MHz<br>(AV) RB=1MHz, VB=10Hz |
| 量測場地溫度： | 23°C            | 量測場地濕度： | 68%RH                                          |
| 測試日期：   | 105 年 11 月 10 日 | 測試者：    | 羅益偉                                            |

#### ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
|-----|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| 1   | 5079.00     | 51.2 PK                 | 74.0           | -22.8       | 2.93 H             | 146                  | 49.9             | 1.3                      |
| 2   | 5079.00     | 40.7 AV                 | 54.0           | -13.3       | 2.93 H             | 146                  | 39.4             | 1.3                      |
| 3   | *5300.00    | 108.5 PK                |                |             | 2.93 H             | 146                  | 106.7            | 1.8                      |
| 4   | *5300.00    | 99.2 AV                 |                |             | 2.93 H             | 146                  | 97.4             | 1.8                      |
| 5   | 10600.00    | 51.6 PK                 | 74.0           | -22.4       | 1.42 H             | 287                  | 39.1             | 12.5                     |
| 6   | 10600.00    | 38.6 AV                 | 54.0           | -15.4       | 1.42 H             | 287                  | 26.1             | 12.5                     |
| 7   | 15900.00    | 53.6 PK                 | 74.0           | -20.4       | 2.08 H             | 109                  | 40.6             | 13.0                     |
| 8   | 15900.00    | 39.8 AV                 | 54.0           | -14.2       | 2.08 H             | 109                  | 26.8             | 13.0                     |
| 9   | 21200.00    | -                       | -              | -           | -                  | -                    | -                | -                        |
| 10  | #26500.00   | -                       | -              | -           | -                  | -                    | -                | -                        |
| 11  | 31800.00    | -                       | -              | -           | -                  | -                    | -                | -                        |
| 12  | #37100.00   | -                       | -              | -           | -                  | -                    | -                | -                        |

#### REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

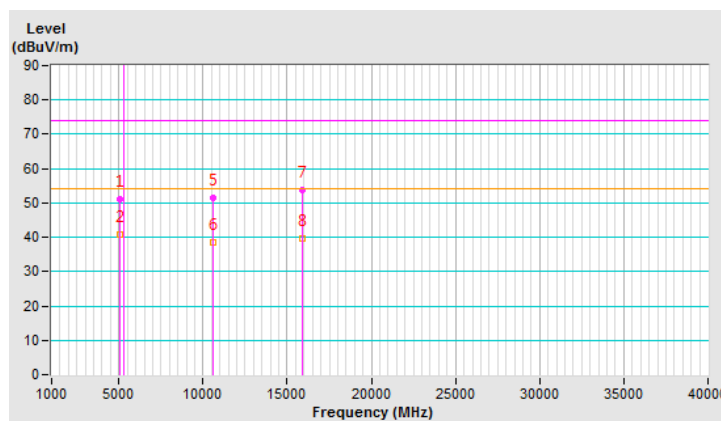


|         |                 |         |                                                |
|---------|-----------------|---------|------------------------------------------------|
| 操作模式：   | 發射              | 調變技術：   | OFDM                                           |
| 基本波頻率：  | CH 60：5300 MHz  | 測試儀器：   | (PK) RB=1MHz, VB=3MHz<br>(AV) RB=1MHz, VB=10Hz |
| 量測場地溫度： | 23℃             | 量測場地濕度： | 68%RH                                          |
| 測試日期：   | 105 年 11 月 10 日 | 測試者：    | 羅益偉                                            |

| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M |                |                               |                   |                |                          |                            |                        |                                |
|---------------------------------------------------|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| NO.                                               | FREQ.<br>(MHz) | EMISSION<br>LEVEL<br>(dBuV/m) | LIMIT<br>(dBuV/m) | MARGIN<br>(dB) | ANTENNA<br>HEIGHT<br>(m) | TABLE<br>ANGLE<br>(Degree) | RAW<br>VALUE<br>(dBuV) | CORRECTION<br>FACTOR<br>(dB/m) |
| 1                                                 | 5079.00        | 57.5 PK                       | 74.0              | -16.5          | 1.98 V                   | 155                        | 56.2                   | 1.3                            |
| 2                                                 | 5079.00        | 49.2 AV                       | 54.0              | -4.8           | 1.98 V                   | 155                        | 47.9                   | 1.3                            |
| 3                                                 | *5300.00       | 115.2 PK                      |                   |                | 1.98 V                   | 155                        | 113.4                  | 1.8                            |
| 4                                                 | *5300.00       | 105.9 AV                      |                   |                | 1.98 V                   | 155                        | 104.1                  | 1.8                            |
| 5                                                 | 10600.00       | 50.2 PK                       | 74.0              | -23.8          | 2.30 V                   | 242                        | 37.7                   | 12.5                           |
| 6                                                 | 10600.00       | 39.1 AV                       | 54.0              | -14.9          | 2.30 V                   | 242                        | 26.6                   | 12.5                           |
| 7                                                 | 15900.00       | 55.5 PK                       | 74.0              | -18.5          | 1.05 V                   | 189                        | 42.5                   | 13.0                           |
| 8                                                 | 15900.00       | 42.9 AV                       | 54.0              | -11.1          | 1.05 V                   | 189                        | 29.9                   | 13.0                           |
| 9                                                 | 21200.00       | -                             | -                 | -              | -                        | -                          | -                      | -                              |
| 10                                                | #26500.00      | -                             | -                 | -              | -                        | -                          | -                      | -                              |
| 11                                                | 31800.00       | -                             | -                 | -              | -                        | -                          | -                      | -                              |
| 12                                                | #37100.00      | -                             | -                 | -              | -                        | -                          | -                      | -                              |

#### REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

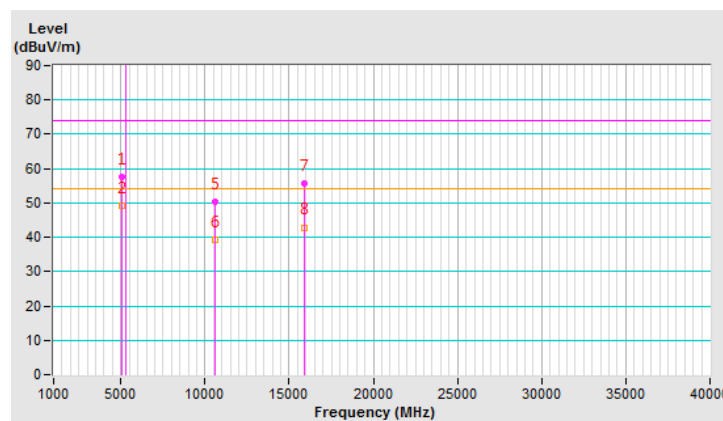


|         |                 |         |                                                |
|---------|-----------------|---------|------------------------------------------------|
| 操作模式：   | 發射              | 調變技術：   | OFDM                                           |
| 基本波頻率：  | CH 64：5320 MHz  | 測試儀器：   | (PK) RB=1MHz, VB=3MHz<br>(AV) RB=1MHz, VB=10Hz |
| 量測場地溫度： | 23℃             | 量測場地濕度： | 68%RH                                          |
| 測試日期：   | 105 年 11 月 10 日 | 測試者：    | 羅益偉                                            |

#### ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
|-----|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| 1   | *5320.00    | 107.8 PK                |                |             | 2.96 H             | 142                  | 106.0            | 1.8                      |
| 2   | *5320.00    | 98.8 AV                 |                |             | 2.96 H             | 142                  | 97.0             | 1.8                      |
| 3   | 5350.00     | 50.9 PK                 | 74.0           | -23.1       | 2.96 H             | 142                  | 49.0             | 1.9                      |
| 4   | 5350.00     | 40.5 AV                 | 54.0           | -13.5       | 2.96 H             | 142                  | 38.6             | 1.9                      |
| 5   | 10640.00    | 51.3 PK                 | 74.0           | -22.7       | 1.42 H             | 303                  | 38.8             | 12.5                     |
| 6   | 10640.00    | 38.4 AV                 | 54.0           | -15.6       | 1.42 H             | 303                  | 25.9             | 12.5                     |
| 7   | 15960.00    | 53.5 PK                 | 74.0           | -20.5       | 2.11 H             | 86                   | 40.6             | 12.9                     |
| 8   | 15960.00    | 39.8 AV                 | 54.0           | -14.2       | 2.11 H             | 86                   | 26.9             | 12.9                     |
| 9   | 21280.00    | -                       | -              | -           | -                  | -                    | -                | -                        |
| 10  | #26600.00   | -                       | -              | -           | -                  | -                    | -                | -                        |
| 11  | #31920.00   | -                       | -              | -           | -                  | -                    | -                | -                        |
| 12  | #37240.00   | -                       | -              | -           | -                  | -                    | -                | -                        |

#### REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

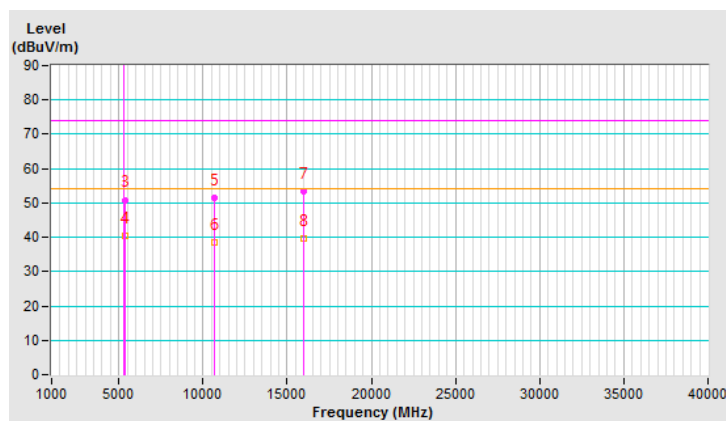


|         |                 |         |                                                |
|---------|-----------------|---------|------------------------------------------------|
| 操作模式：   | 發射              | 調變技術：   | OFDM                                           |
| 基本波頻率：  | CH 64：5320 MHz  | 測試儀器：   | (PK) RB=1MHz, VB=3MHz<br>(AV) RB=1MHz, VB=10Hz |
| 量測場地溫度： | 23℃             | 量測場地濕度： | 68%RH                                          |
| 測試日期：   | 105 年 11 月 10 日 | 測試者：    | 羅益偉                                            |

| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M |             |                         |                |             |                    |                      |                  |                          |
|---------------------------------------------------|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| NO.                                               | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
| 1                                                 | *5320.00    | 114.7 PK                |                |             | 2.00 V             | 181                  | 112.9            | 1.8                      |
| 2                                                 | *5320.00    | 105.5 AV                |                |             | 2.00 V             | 181                  | 103.7            | 1.8                      |
| 3                                                 | 5350.00     | 61.5 PK                 | 74.0           | -12.5       | 2.00 V             | 181                  | 59.6             | 1.9                      |
| 4                                                 | 5350.00     | 47.3 AV                 | 54.0           | -6.7        | 2.00 V             | 181                  | 45.4             | 1.9                      |
| 5                                                 | 10640.00    | 51.4 PK                 | 74.0           | -22.6       | 2.35 V             | 229                  | 38.9             | 12.5                     |
| 6                                                 | 10640.00    | 39.9 AV                 | 54.0           | -14.1       | 2.35 V             | 229                  | 27.4             | 12.5                     |
| 7                                                 | 15960.00    | 55.9 PK                 | 74.0           | -18.1       | 1.00 V             | 187                  | 43.0             | 12.9                     |
| 8                                                 | 15960.00    | 42.9 AV                 | 54.0           | -11.1       | 1.00 V             | 187                  | 30.0             | 12.9                     |
| 9                                                 | 21280.00    | -                       | -              | -           | -                  | -                    | -                | -                        |
| 10                                                | #26600.00   | -                       | -              | -           | -                  | -                    | -                | -                        |
| 11                                                | #31920.00   | -                       | -              | -           | -                  | -                    | -                | -                        |
| 12                                                | #37240.00   | -                       | -              | -           | -                  | -                    | -                | -                        |

#### REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

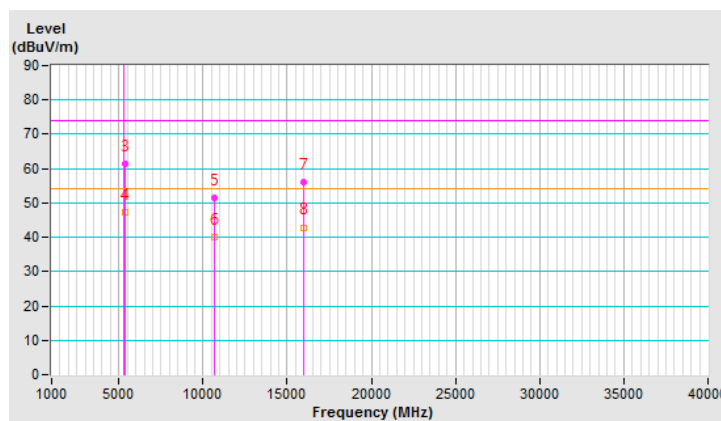


|         |                 |         |                                                |
|---------|-----------------|---------|------------------------------------------------|
| 操作模式：   | 發射              | 調變技術：   | OFDM                                           |
| 基本波頻率：  | CH 100：5500 MHz | 測試儀器：   | (PK) RB=1MHz, VB=3MHz<br>(AV) RB=1MHz, VB=10Hz |
| 量測場地溫度： | 23°C            | 量測場地濕度： | 68%RH                                          |
| 測試日期：   | 105 年 11 月 10 日 | 測試者：    | 羅益偉                                            |

| ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M |             |                         |                |             |                    |                      |                  |                          |
|-----------------------------------------------------|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| NO.                                                 | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
| 1                                                   | 5418.00     | 50.9 PK                 | 74.0           | -23.1       | 2.91 H             | 164                  | 48.8             | 2.1                      |
| 2                                                   | 5418.00     | 40.5 AV                 | 54.0           | -13.5       | 2.91 H             | 164                  | 38.4             | 2.1                      |
| 3                                                   | #5470.00    | 61.1 PK                 | 74.0           | -12.9       | 2.91 H             | 164                  | 59.0             | 2.1                      |
| 4                                                   | #5470.00    | 43.2 AV                 | 54.0           | -10.8       | 2.91 H             | 164                  | 41.1             | 2.1                      |
| 5                                                   | *5500.00    | 106.9 PK                |                |             | 2.91 H             | 164                  | 104.8            | 2.1                      |
| 6                                                   | *5500.00    | 97.8 AV                 |                |             | 2.91 H             | 164                  | 95.7             | 2.1                      |
| 7                                                   | 11000.00    | 51.5 PK                 | 74.0           | -22.5       | 1.40 H             | 304                  | 38.3             | 13.2                     |
| 8                                                   | 11000.00    | 38.4 AV                 | 54.0           | -15.6       | 1.40 H             | 304                  | 25.2             | 13.2                     |
| 9                                                   | #16500.00   | 54.1 PK                 | 74.0           | -19.9       | 2.09 H             | 93                   | 39.1             | 15.0                     |
| 10                                                  | #16500.00   | 40.3 AV                 | 54.0           | -13.7       | 2.09 H             | 93                   | 25.3             | 15.0                     |
| 11                                                  | #22000.00   | -                       | -              | -           | -                  | -                    | -                | -                        |
| 12                                                  | #27500.00   | -                       | -              | -           | -                  | -                    | -                | -                        |
| 13                                                  | #33000.00   | -                       | -              | -           | -                  | -                    | -                | -                        |
| 14                                                  | #38500.00   | -                       | -              | -           | -                  | -                    | -                | -                        |

#### REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

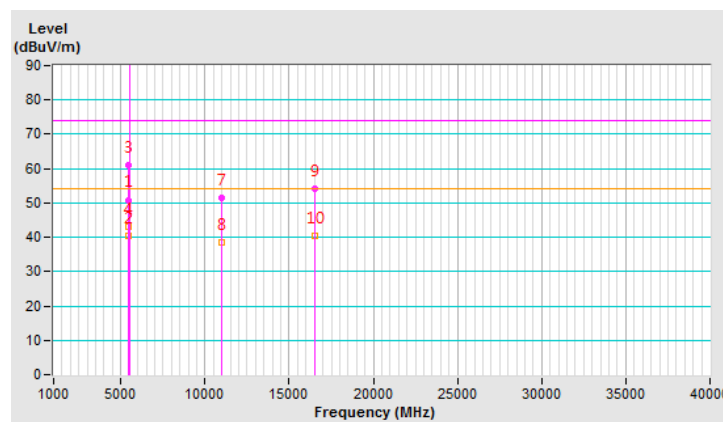


|         |                 |         |                                                |
|---------|-----------------|---------|------------------------------------------------|
| 操作模式：   | 發射              | 調變技術：   | OFDM                                           |
| 基本波頻率：  | CH 100：5500 MHz | 測試儀器：   | (PK) RB=1MHz, VB=3MHz<br>(AV) RB=1MHz, VB=10Hz |
| 量測場地溫度： | 23°C            | 量測場地濕度： | 68%RH                                          |
| 測試日期：   | 105 年 11 月 10 日 | 測試者：    | 羅益偉                                            |

| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M |             |                         |                |             |                    |                      |                  |                          |
|---------------------------------------------------|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| NO.                                               | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
| 1                                                 | 5418.00     | 62.1 PK                 | 74.0           | -11.9       | 2.11 V             | 94                   | 60.0             | 2.1                      |
| 2                                                 | 5418.00     | 50.8 AV                 | 54.0           | -3.2        | 2.11 V             | 94                   | 48.7             | 2.1                      |
| 3                                                 | #5470.00    | 66.1 PK                 | 74.0           | -7.9        | 2.11 V             | 94                   | 64.0             | 2.1                      |
| 4                                                 | #5470.00    | 48.0 AV                 | 54.0           | -6.0        | 2.11 V             | 94                   | 45.9             | 2.1                      |
| 5                                                 | *5500.00    | 114.7 PK                |                |             | 2.11 V             | 94                   | 112.6            | 2.1                      |
| 6                                                 | *5500.00    | 104.8 AV                |                |             | 2.11 V             | 94                   | 102.7            | 2.1                      |
| 7                                                 | 11000.00    | 51.0 PK                 | 74.0           | -23.0       | 2.27 V             | 225                  | 37.8             | 13.2                     |
| 8                                                 | 11000.00    | 39.9 AV                 | 54.0           | -14.1       | 2.27 V             | 225                  | 26.7             | 13.2                     |
| 9                                                 | #16500.00   | 55.6 PK                 | 74.0           | -18.4       | 1.00 V             | 201                  | 40.6             | 15.0                     |
| 10                                                | #16500.00   | 43.0 AV                 | 54.0           | -11.0       | 1.00 V             | 201                  | 28.0             | 15.0                     |
| 11                                                | #22000.00   | -                       | -              | -           | -                  | -                    | -                | -                        |
| 12                                                | #27500.00   | -                       | -              | -           | -                  | -                    | -                | -                        |
| 13                                                | #33000.00   | -                       | -              | -           | -                  | -                    | -                | -                        |
| 14                                                | #38500.00   | -                       | -              | -           | -                  | -                    | -                | -                        |

#### REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

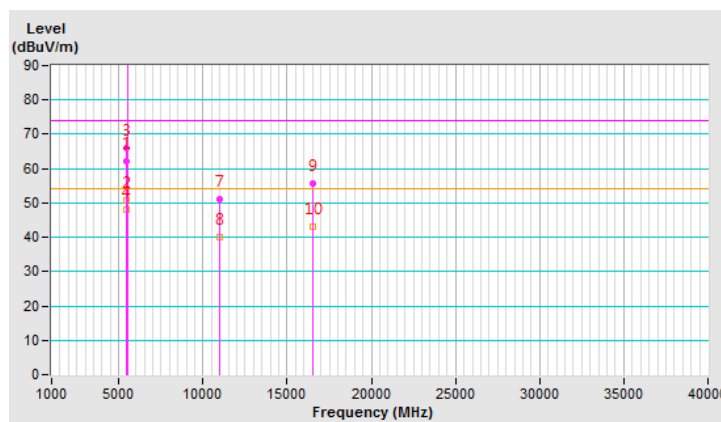


|         |                 |         |                                                |
|---------|-----------------|---------|------------------------------------------------|
| 操作模式：   | 發射              | 調變技術：   | OFDM                                           |
| 基本波頻率：  | CH 116：5580 MHz | 測試儀器：   | (PK) RB=1MHz, VB=3MHz<br>(AV) RB=1MHz, VB=10Hz |
| 量測場地溫度： | 23℃             | 量測場地濕度： | 68%RH                                          |
| 測試日期：   | 105 年 11 月 10 日 | 測試者：    | 羅益偉                                            |

#### ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
|-----|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| 1   | *5580.00    | 106.7 PK                |                |             | 2.86 H             | 173                  | 104.4            | 2.3                      |
| 2   | *5580.00    | 97.5 AV                 |                |             | 2.86 H             | 173                  | 95.2             | 2.3                      |
| 3   | #5815.00    | 50.9 PK                 | 74.0           | -23.1       | 2.86 H             | 173                  | 48.2             | 2.7                      |
| 4   | #5815.00    | 40.7 AV                 | 54.0           | -13.3       | 2.86 H             | 173                  | 38.0             | 2.7                      |
| 5   | 11160.00    | 50.7 PK                 | 74.0           | -23.3       | 1.40 H             | 305                  | 37.6             | 13.1                     |
| 6   | 11160.00    | 38.0 AV                 | 54.0           | -16.0       | 1.40 H             | 305                  | 24.9             | 13.1                     |
| 7   | #16740.00   | 54.1 PK                 | 74.0           | -19.9       | 2.20 H             | 99                   | 38.0             | 16.1                     |
| 8   | #16740.00   | 40.1 AV                 | 54.0           | -13.9       | 2.20 H             | 99                   | 24.0             | 16.1                     |
| 9   | 22320.00    | -                       | -              | -           | -                  | -                    | -                | -                        |
| 10  | #27900.00   | -                       | -              | -           | -                  | -                    | -                | -                        |
| 11  | #33480.00   | -                       | -              | -           | -                  | -                    | -                | -                        |
| 12  | 39060.00    | -                       | -              | -           | -                  | -                    | -                | -                        |

#### REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

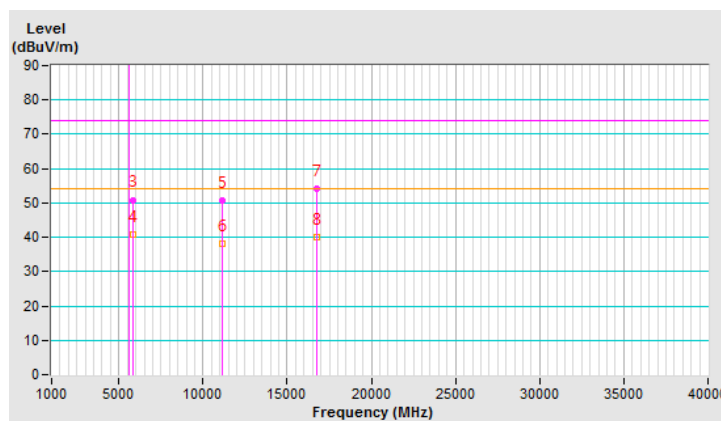


|         |                 |         |                                                |
|---------|-----------------|---------|------------------------------------------------|
| 操作模式：   | 發射              | 調變技術：   | OFDM                                           |
| 基本波頻率：  | CH 116：5580 MHz | 測試儀器：   | (PK) RB=1MHz, VB=3MHz<br>(AV) RB=1MHz, VB=10Hz |
| 量測場地溫度： | 23℃             | 量測場地濕度： | 68%RH                                          |
| 測試日期：   | 105 年 11 月 10 日 | 測試者：    | 羅益偉                                            |

| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M |             |                         |                |             |                    |                      |                  |                          |
|---------------------------------------------------|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| NO.                                               | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
| 1                                                 | *5580.00    | 114.9 PK                |                |             | 2.05 V             | 84                   | 112.6            | 2.3                      |
| 2                                                 | *5580.00    | 105.0 AV                |                |             | 2.05 V             | 84                   | 102.7            | 2.3                      |
| 3                                                 | #5815.00    | 56.3 PK                 | 74.0           | -17.7       | 2.05 V             | 84                   | 53.6             | 2.7                      |
| 4                                                 | #5815.00    | 48.3 AV                 | 54.0           | -5.7        | 2.05 V             | 84                   | 45.6             | 2.7                      |
| 5                                                 | 11160.00    | 50.7 PK                 | 74.0           | -23.3       | 2.32 V             | 228                  | 37.6             | 13.1                     |
| 6                                                 | 11160.00    | 39.4 AV                 | 54.0           | -14.6       | 2.32 V             | 228                  | 26.3             | 13.1                     |
| 7                                                 | #16740.00   | 55.8 PK                 | 74.0           | -18.2       | 1.04 V             | 191                  | 39.7             | 16.1                     |
| 8                                                 | #16740.00   | 43.2 AV                 | 54.0           | -10.8       | 1.04 V             | 191                  | 27.1             | 16.1                     |
| 9                                                 | 22320.00    | -                       | -              | -           | -                  | -                    | -                | -                        |
| 10                                                | #27900.00   | -                       | -              | -           | -                  | -                    | -                | -                        |
| 11                                                | #33480.00   | -                       | -              | -           | -                  | -                    | -                | -                        |
| 12                                                | 39060.00    | -                       | -              | -           | -                  | -                    | -                | -                        |

#### REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

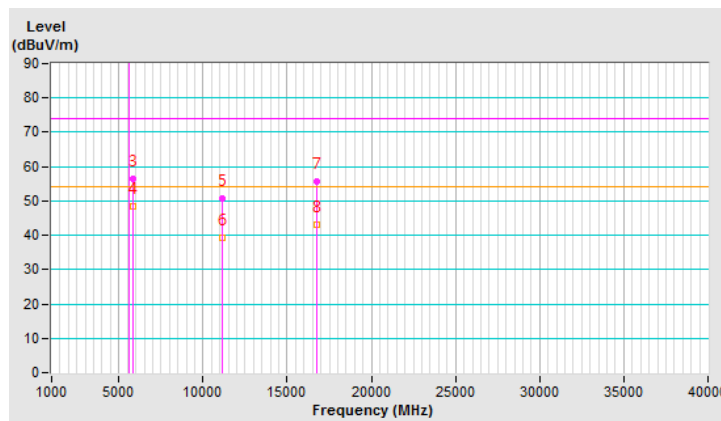


|         |                 |         |                                                |
|---------|-----------------|---------|------------------------------------------------|
| 操作模式：   | 發射              | 調變技術：   | OFDM                                           |
| 基本波頻率：  | CH 140：5700 MHz | 測試儀器：   | (PK) RB=1MHz, VB=3MHz<br>(AV) RB=1MHz, VB=10Hz |
| 量測場地溫度： | 23℃             | 量測場地濕度： | 68%RH                                          |
| 測試日期：   | 105 年 11 月 10 日 | 測試者：    | 羅益偉                                            |

# ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
|-----|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| 1   | *5700.00    | 107.1 PK                |                |             | 2.90 H             | 159                  | 104.4            | 2.7                      |
| 2   | *5700.00    | 98.0 AV                 |                |             | 2.90 H             | 159                  | 95.3             | 2.7                      |
| 3   | #5725.00    | 66.4 PK                 | 74.0           | -7.6        | 2.90 H             | 159                  | 63.7             | 2.7                      |
| 4   | #5725.00    | 46.4 AV                 | 54.0           | -7.6        | 2.90 H             | 159                  | 43.7             | 2.7                      |
| 5   | 11400.00    | 51.3 PK                 | 74.0           | -22.7       | 1.51 H             | 304                  | 38.0             | 13.3                     |
| 6   | 11400.00    | 38.1 AV                 | 54.0           | -15.9       | 1.51 H             | 304                  | 24.8             | 13.3                     |
| 7   | #17100.00   | 53.5 PK                 | 74.0           | -20.5       | 2.12 H             | 90                   | 35.8             | 17.7                     |
| 8   | #17100.00   | 39.7 AV                 | 54.0           | -14.3       | 2.12 H             | 90                   | 22.0             | 17.7                     |
| 9   | 22800.00    | -                       | -              | -           | -                  | -                    | -                | -                        |
| 10  | #28500.00   | -                       | -              | -           | -                  | -                    | -                | -                        |
| 11  | #34200.00   | -                       | -              | -           | -                  | -                    | -                | -                        |
| 12  | 39900.00    | -                       | -              | -           | -                  | -                    | -                | -                        |

## REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

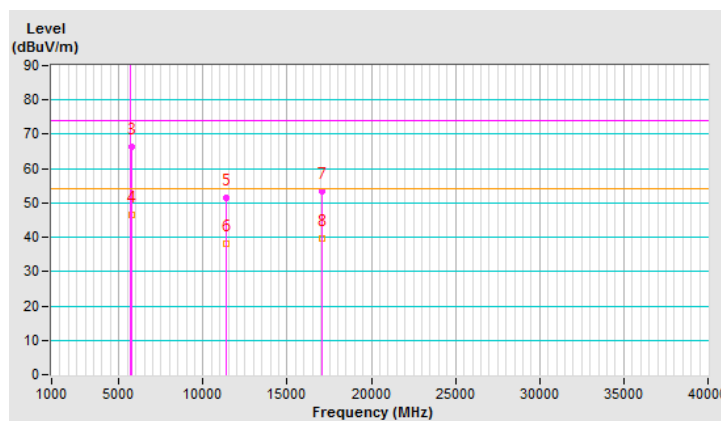


|         |                 |         |                                                |
|---------|-----------------|---------|------------------------------------------------|
| 操作模式：   | 發射              | 調變技術：   | OFDM                                           |
| 基本波頻率：  | CH 140：5700 MHz | 測試儀器：   | (PK) RB=1MHz, VB=3MHz<br>(AV) RB=1MHz, VB=10Hz |
| 量測場地溫度： | 23℃             | 量測場地濕度： | 68%RH                                          |
| 測試日期：   | 105 年 11 月 10 日 | 測試者：    | 羅益偉                                            |

#### ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
|-----|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| 1   | *5700.00    | 114.7 PK                |                |             | 2.06 V             | 89                   | 112.0            | 2.7                      |
| 2   | *5700.00    | 105.1 AV                |                |             | 2.06 V             | 89                   | 102.4            | 2.7                      |
| 3   | #5725.00    | 71.2 PK                 | 74.0           | -2.8        | 2.06 V             | 89                   | 68.5             | 2.7                      |
| 4   | #5725.00    | 51.8 AV                 | 54.0           | -2.2        | 2.06 V             | 89                   | 49.1             | 2.7                      |
| 5   | 11400.00    | 50.2 PK                 | 74.0           | -23.8       | 2.31 V             | 220                  | 36.9             | 13.3                     |
| 6   | 11400.00    | 39.1 AV                 | 54.0           | -14.9       | 2.31 V             | 220                  | 25.8             | 13.3                     |
| 7   | #17100.00   | 55.7 PK                 | 74.0           | -18.3       | 1.06 V             | 189                  | 38.0             | 17.7                     |
| 8   | #17100.00   | 43.2 AV                 | 54.0           | -10.8       | 1.06 V             | 189                  | 25.5             | 17.7                     |
| 9   | 22800.00    | -                       | -              | -           | -                  | -                    | -                | -                        |
| 10  | #28500.00   | -                       | -              | -           | -                  | -                    | -                | -                        |
| 11  | #34200.00   | -                       | -              | -           | -                  | -                    | -                | -                        |
| 12  | 39900.00    | -                       | -              | -           | -                  | -                    | -                | -                        |

#### REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

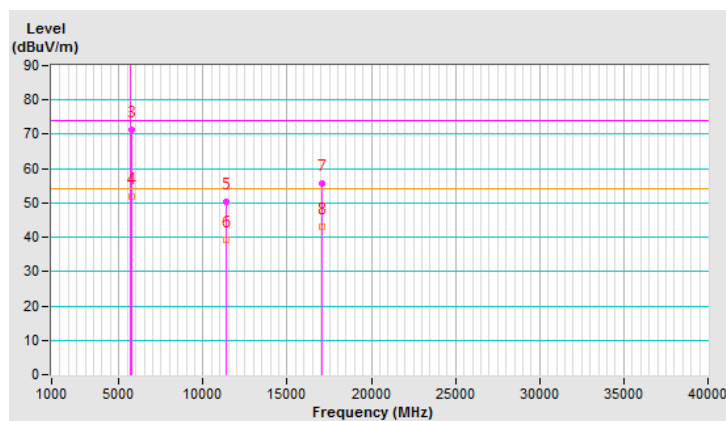


|         |                   |         |                                                |
|---------|-------------------|---------|------------------------------------------------|
| 操作模式：   | 發射                | 調變技術：   | OFDM                                           |
| 基本波頻率：  | CH 149 : 5745 MHz | 測試儀器：   | (PK) RB=1MHz, VB=3MHz<br>(AV) RB=1MHz, VB=10Hz |
| 量測場地溫度： | 22°C              | 量測場地濕度： | 70%RH                                          |
| 測試日期：   | 105 年 10 月 7 日    | 測試者：    | 鄭樹營                                            |

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

| NO. | FREQ.<br>(MHz) | EMISSION<br>LEVEL<br>(dBuV/m) | LIMIT<br>(dBuV/m) | MARGIN<br>(dB) | ANTENNA<br>HEIGHT<br>(m) | TABLE<br>ANGLE<br>(Degree) | RAW<br>VALUE<br>(dBuV) | CORRECTION<br>FACTOR<br>(dB/m) |
|-----|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| 1   | *5745.00       | 114.5 PK                      |                   |                | 1.07 H                   | 171                        | 111.8                  | 2.7                            |
| 2   | *5745.00       | 106.8 AV                      |                   |                | 1.07 H                   | 171                        | 104.1                  | 2.7                            |
| 3   | 11490.00       | 53.4 PK                       | 74.0              | -20.6          | 1.40 H                   | 5                          | 40.0                   | 13.4                           |
| 4   | 11490.00       | 41.7 AV                       | 54.0              | -12.3          | 1.40 H                   | 5                          | 28.3                   | 13.4                           |
| 5   | #17235.00      | 59.7 PK                       | 68.2              | -8.5           | 2.19 H                   | 294                        | 41.4                   | 18.3                           |
| 6   | 22980.00       | -                             | -                 | -              | -                        | -                          | -                      | -                              |
| 7   | #28725.00      | -                             | -                 | -              | -                        | -                          | -                      | -                              |
| 8   | #34470.00      | -                             | -                 | -              | -                        | -                          | -                      | -                              |

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

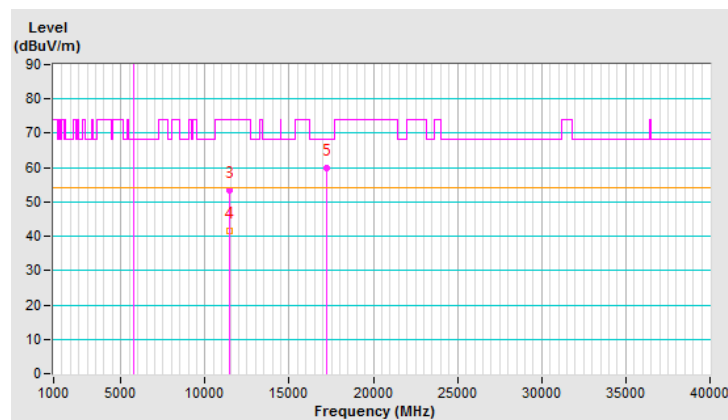


|         |                   |         |                                                |
|---------|-------------------|---------|------------------------------------------------|
| 操作模式：   | 發射                | 調變技術：   | OFDM                                           |
| 基本波頻率：  | CH 149 : 5745 MHz | 測試儀器：   | (PK) RB=1MHz, VB=3MHz<br>(AV) RB=1MHz, VB=10Hz |
| 量測場地溫度： | 22°C              | 量測場地濕度： | 70%RH                                          |
| 測試日期：   | 105 年 10 月 7 日    | 測試者：    | 鄭樹營                                            |

#### ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
|-----|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| 1   | *5745.00    | 122.1 PK                |                |             | 1.78 V             | 6                    | 119.4            | 2.7                      |
| 2   | *5745.00    | 112.1 AV                |                |             | 1.78 V             | 6                    | 109.4            | 2.7                      |
| 3   | 11490.00    | 56.0 PK                 | 74.0           | -18.0       | 2.18 V             | 280                  | 42.6             | 13.4                     |
| 4   | 11490.00    | 45.2 AV                 | 54.0           | -8.8        | 2.18 V             | 280                  | 31.8             | 13.4                     |
| 5   | #17235.00   | 66.5 PK                 | 68.2           | -1.7        | 1.94 V             | 360                  | 48.2             | 18.3                     |
| 6   | 22980.00    | -                       | -              | -           | -                  | -                    | -                | -                        |
| 7   | #28725.00   | -                       | -              | -           | -                  | -                    | -                | -                        |
| 8   | #34470.00   | -                       | -              | -           | -                  | -                    | -                | -                        |

#### REMARKS:

- Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
- Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
- The other emission levels were very low against the limit.
- Margin value = Emission Level – Limit value
- " \* ": Fundamental frequency (主頻).
- " # ": The radiated frequency is out of the restricted band.
- " - ": The emission levels were too low to be detected.
- The blank is not available, the limit of fundamental frequency was restricted at the output power.

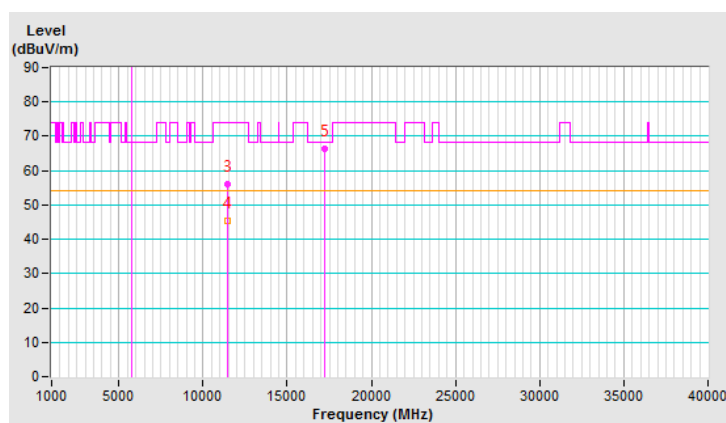


|         |                   |         |                                                |
|---------|-------------------|---------|------------------------------------------------|
| 操作模式：   | 發射                | 調變技術：   | OFDM                                           |
| 基本波頻率：  | CH 157 : 5785 MHz | 測試儀器：   | (PK) RB=1MHz, VB=3MHz<br>(AV) RB=1MHz, VB=10Hz |
| 量測場地溫度： | 22°C              | 量測場地濕度： | 70%RH                                          |
| 測試日期：   | 105 年 10 月 7 日    | 測試者：    | 鄭樹營                                            |

#### ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
|-----|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| 1   | *5785.00    | 114.4 PK                |                |             | 1.02 H             | 167                  | 111.7            | 2.7                      |
| 2   | *5785.00    | 106.9 AV                |                |             | 1.02 H             | 167                  | 104.2            | 2.7                      |
| 3   | 11570.00    | 53.2 PK                 | 74.0           | -20.8       | 1.42 H             | 0                    | 40.1             | 13.1                     |
| 4   | 11570.00    | 41.3 AV                 | 54.0           | -12.7       | 1.42 H             | 0                    | 28.2             | 13.1                     |
| 5   | #17355.00   | 59.5 PK                 | 68.2           | -8.7        | 2.22 H             | 297                  | 40.7             | 18.8                     |
| 6   | #23140.00   | -                       | -              | -           | -                  | -                    | -                | -                        |
| 7   | #28925.00   | -                       | -              | -           | -                  | -                    | -                | -                        |
| 8   | #34710.00   | -                       | -              | -           | -                  | -                    | -                | -                        |

#### REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

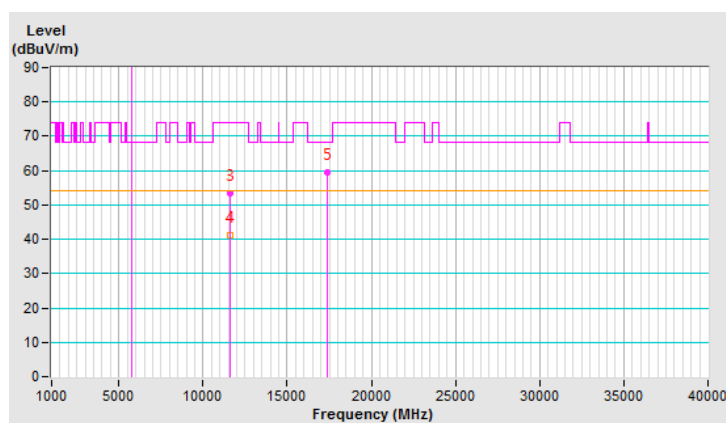


|         |                   |         |                                                |
|---------|-------------------|---------|------------------------------------------------|
| 操作模式：   | 發射                | 調變技術：   | OFDM                                           |
| 基本波頻率：  | CH 157 : 5785 MHz | 測試儀器：   | (PK) RB=1MHz, VB=3MHz<br>(AV) RB=1MHz, VB=10Hz |
| 量測場地溫度： | 22°C              | 量測場地濕度： | 70%RH                                          |
| 測試日期：   | 105 年 10 月 7 日    | 測試者：    | 鄭樹營                                            |

| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M |             |                         |                |             |                    |                      |                  |                          |
|---------------------------------------------------|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| NO.                                               | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
| 1                                                 | *5785.00    | 121.6 PK                |                |             | 1.87 V             | 4                    | 118.9            | 2.7                      |
| 2                                                 | *5785.00    | 111.6 AV                |                |             | 1.87 V             | 4                    | 108.9            | 2.7                      |
| 3                                                 | 11570.00    | 55.9 PK                 | 74.0           | -18.1       | 2.17 V             | 266                  | 42.8             | 13.1                     |
| 4                                                 | 11570.00    | 45.2 AV                 | 54.0           | -8.8        | 2.17 V             | 266                  | 32.1             | 13.1                     |
| 5                                                 | #17355.00   | 66.0 PK                 | 68.2           | -2.2        | 1.88 V             | 360                  | 47.2             | 18.8                     |
| 6                                                 | #23140.00   | -                       | -              | -           | -                  | -                    | -                | -                        |
| 7                                                 | #28925.00   | -                       | -              | -           | -                  | -                    | -                | -                        |
| 8                                                 | #34710.00   | -                       | -              | -           | -                  | -                    | -                | -                        |

#### REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

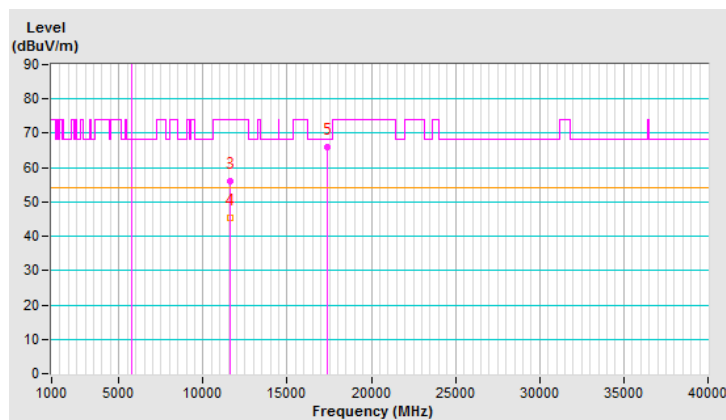


|         |                 |         |                                                |
|---------|-----------------|---------|------------------------------------------------|
| 操作模式：   | 發射              | 調變技術：   | OFDM                                           |
| 基本波頻率：  | CH 165：5825 MHz | 測試儀器：   | (PK) RB=1MHz, VB=3MHz<br>(AV) RB=1MHz, VB=10Hz |
| 量測場地溫度： | 22°C            | 量測場地濕度： | 70%RH                                          |
| 測試日期：   | 105 年 10 月 7 日  | 測試者：    | 鄭樹營                                            |

| ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M |             |                         |                |             |                    |                      |                  |                          |
|-----------------------------------------------------|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| NO.                                                 | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
| 1                                                   | *5825.00    | 115.1 PK                |                |             | 1.02 H             | 167                  | 112.4            | 2.7                      |
| 2                                                   | *5825.00    | 107.2 AV                |                |             | 1.02 H             | 167                  | 104.5            | 2.7                      |
| 3                                                   | 11650.00    | 53.1 PK                 | 74.0           | -20.9       | 1.42 H             | 1                    | 40.0             | 13.1                     |
| 4                                                   | 11650.00    | 41.1 AV                 | 54.0           | -12.9       | 1.42 H             | 1                    | 28.0             | 13.1                     |
| 5                                                   | #17475.00   | 59.7 PK                 | 68.2           | -8.5        | 2.17 H             | 303                  | 40.5             | 19.2                     |
| 6                                                   | #23300.00   | -                       | -              | -           | -                  | -                    | -                | -                        |
| 7                                                   | #29125.00   | -                       | -              | -           | -                  | -                    | -                | -                        |
| 8                                                   | #34950.00   | -                       | -              | -           | -                  | -                    | -                | -                        |

#### REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

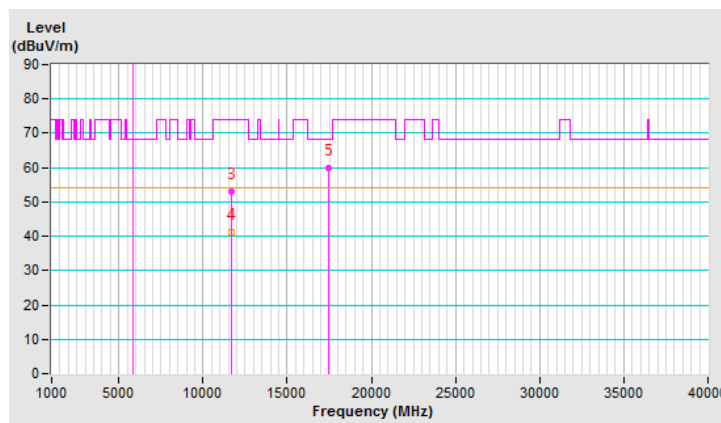


|         |                 |         |                                                |
|---------|-----------------|---------|------------------------------------------------|
| 操作模式：   | 發射              | 調變技術：   | OFDM                                           |
| 基本波頻率：  | CH 165：5825 MHz | 測試儀器：   | (PK) RB=1MHz, VB=3MHz<br>(AV) RB=1MHz, VB=10Hz |
| 量測場地溫度： | 22°C            | 量測場地濕度： | 70%RH                                          |
| 測試日期：   | 105 年 10 月 7 日  | 測試者：    | 鄭樹營                                            |

| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M |             |                         |                |             |                    |                      |                  |                          |
|---------------------------------------------------|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| NO.                                               | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
| 1                                                 | *5825.00    | 121.6 PK                |                |             | 1.97 V             | 5                    | 118.9            | 2.7                      |
| 2                                                 | *5825.00    | 111.7 AV                |                |             | 1.97 V             | 5                    | 109.0            | 2.7                      |
| 3                                                 | 11650.00    | 55.5 PK                 | 74.0           | -18.5       | 2.14 V             | 255                  | 42.4             | 13.1                     |
| 4                                                 | 11650.00    | 44.9 AV                 | 54.0           | -9.1        | 2.14 V             | 255                  | 31.8             | 13.1                     |
| 5                                                 | #17475.00   | 66.5 PK                 | 68.2           | -1.7        | 1.83 V             | 360                  | 47.3             | 19.2                     |
| 6                                                 | #23300.00   | -                       | -              | -           | -                  | -                    | -                | -                        |
| 7                                                 | #29125.00   | -                       | -              | -           | -                  | -                    | -                | -                        |
| 8                                                 | #34950.00   | -                       | -              | -           | -                  | -                    | -                | -                        |

#### REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

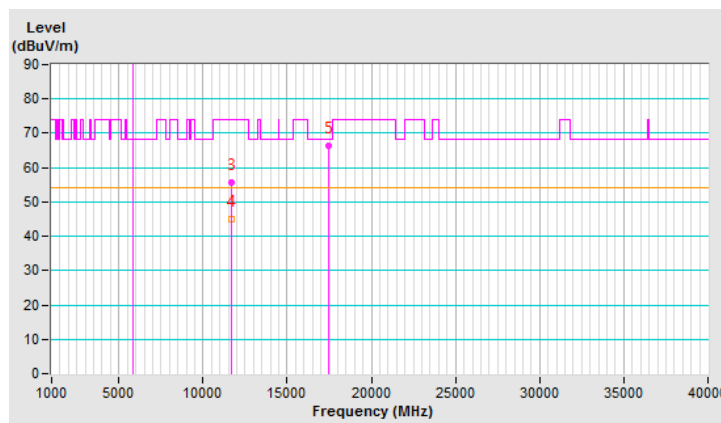

## 802.11ac (VHT20)


|         |                 |         |                                                |
|---------|-----------------|---------|------------------------------------------------|
| 操作模式：   | 發射              | 調變技術：   | OFDM                                           |
| 基本波頻率：  | CH 36：5180 MHz  | 測試儀器：   | (PK) RB=1MHz, VB=3MHz<br>(AV) RB=1MHz, VB=10Hz |
| 量測場地溫度： | 22℃             | 量測場地濕度： | 64%RH                                          |
| 測試日期：   | 106 年 10 月 27 日 | 測試者：    | 陳志毅                                            |

## ANTENNA POLARITY &amp; TEST DISTANCE: HORIZONTAL AT 3 M

| NO. | FREQ.<br>(MHz) | EMISSION<br>LEVEL<br>(dBuV/m) | LIMIT<br>(dBuV/m) | MARGIN<br>(dB) | ANTENNA<br>HEIGHT<br>(m) | TABLE<br>ANGLE<br>(Degree) | RAW<br>VALUE<br>(dBuV) | CORRECTION<br>FACTOR<br>(dB/m) |
|-----|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| 1   | 5150.00        | 68.5 PK                       | 74.0              | -5.5           | 1.13 H                   | 196                        | 64.5                   | 4.0                            |
| 2   | 5150.00        | 51.4 AV                       | 54.0              | -2.6           | 1.13 H                   | 196                        | 47.4                   | 4.0                            |
| 3   | *5180.00       | 112.8 PK                      |                   |                | 1.13 H                   | 196                        | 108.8                  | 4.0                            |
| 4   | *5180.00       | 102.7 AV                      |                   |                | 1.13 H                   | 196                        | 98.7                   | 4.0                            |
| 5   | #10360.00      | 62.4 PK                       | 74.0              | -11.6          | 1.25 H                   | 343                        | 48.8                   | 13.6                           |
| 6   | #10360.00      | 50.4 AV                       | 54.0              | -3.6           | 1.25 H                   | 343                        | 36.8                   | 13.6                           |
| 7   | 15540.00       | 54.1 PK                       | 74.0              | -19.9          | 1.45 H                   | 195                        | 40.9                   | 13.2                           |
| 8   | 15540.00       | 43.0 AV                       | 54.0              | -11.0          | 1.45 H                   | 195                        | 29.8                   | 13.2                           |
| 9   | 20720.00       | -                             | -                 | -              | -                        | -                          | -                      | -                              |
| 10  | #25900.00      | -                             | -                 | -              | -                        | -                          | -                      | -                              |
| 11  | #31080.00      | -                             | -                 | -              | -                        | -                          | -                      | -                              |
| 12  | #36260.00      | -                             | -                 | -              | -                        | -                          | -                      | -                              |

## REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

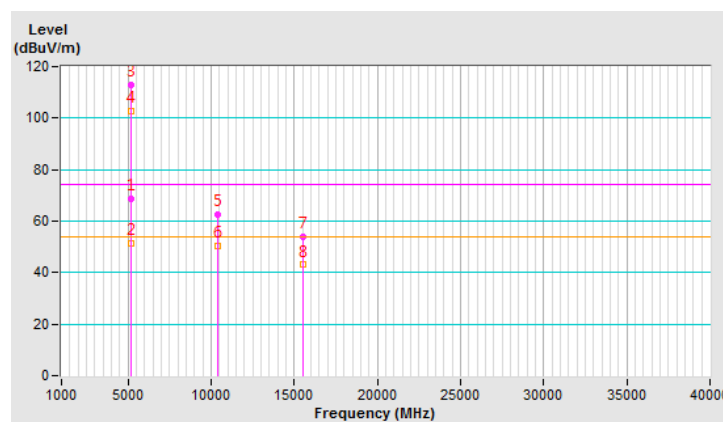


|         |                 |         |                                                |
|---------|-----------------|---------|------------------------------------------------|
| 操作模式：   | 發射              | 調變技術：   | OFDM                                           |
| 基本波頻率：  | CH 36：5180 MHz  | 測試儀器：   | (PK) RB=1MHz, VB=3MHz<br>(AV) RB=1MHz, VB=10Hz |
| 量測場地溫度： | 22°C            | 量測場地濕度： | 64%RH                                          |
| 測試日期：   | 106 年 10 月 27 日 | 測試者：    | 陳志毅                                            |

| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M |             |                         |                |             |                    |                      |                  |                          |
|---------------------------------------------------|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| NO.                                               | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
| 1                                                 | 5150.00     | 71.4 PK                 | 74.0           | -2.6        | 1.89 V             | 173                  | 67.4             | 4.0                      |
| 2                                                 | 5150.00     | 53.9 AV                 | 54.0           | -0.1        | 1.89 V             | 173                  | 49.9             | 4.0                      |
| 3                                                 | *5180.00    | 118.8 PK                |                |             | 1.89 V             | 173                  | 114.8            | 4.0                      |
| 4                                                 | *5180.00    | 109.3 AV                |                |             | 1.89 V             | 173                  | 105.3            | 4.0                      |
| 5                                                 | #10360.00   | 65.4 PK                 | 74.0           | -8.6        | 2.09 V             | 19                   | 51.8             | 13.6                     |
| 6                                                 | #10360.00   | 52.9 AV                 | 54.0           | -1.1        | 2.09 V             | 19                   | 39.3             | 13.6                     |
| 7                                                 | 15540.00    | 53.2 PK                 | 74.0           | -20.8       | 1.98 V             | 199                  | 40.0             | 13.2                     |
| 8                                                 | 15540.00    | 40.6 AV                 | 54.0           | -13.4       | 1.98 V             | 199                  | 27.4             | 13.2                     |
| 9                                                 | 20720.00    | -                       | -              | -           | -                  | -                    | -                | -                        |
| 10                                                | #25900.00   | -                       | -              | -           | -                  | -                    | -                | -                        |
| 11                                                | #31080.00   | -                       | -              | -           | -                  | -                    | -                | -                        |
| 12                                                | #36260.00   | -                       | -              | -           | -                  | -                    | -                | -                        |

#### REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

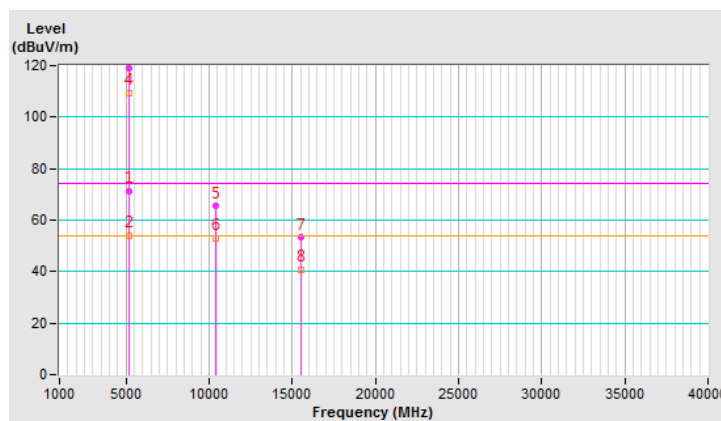


|         |                 |         |                                                |
|---------|-----------------|---------|------------------------------------------------|
| 操作模式：   | 發射              | 調變技術：   | OFDM                                           |
| 基本波頻率：  | CH 40：5200 MHz  | 測試儀器：   | (PK) RB=1MHz, VB=3MHz<br>(AV) RB=1MHz, VB=10Hz |
| 量測場地溫度： | 22°C            | 量測場地濕度： | 64%RH                                          |
| 測試日期：   | 106 年 10 月 27 日 | 測試者：    | 陳志毅                                            |

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
|-----|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| 1   | 5115.00     | 59.7 PK                 | 74.0           | -14.3       | 1.06 H             | 207                  | 55.8             | 3.9                      |
| 2   | 5115.00     | 51.4 AV                 | 54.0           | -2.6        | 1.06 H             | 207                  | 47.5             | 3.9                      |
| 3   | *5200.00    | 111.6 PK                |                |             | 1.06 H             | 207                  | 107.6            | 4.0                      |
| 4   | *5200.00    | 101.5 AV                |                |             | 1.06 H             | 207                  | 97.5             | 4.0                      |
| 5   | 5355.00     | 52.3 PK                 | 74.0           | -21.7       | 1.06 H             | 207                  | 47.9             | 4.4                      |
| 6   | 5355.00     | 43.6 AV                 | 54.0           | -10.4       | 1.06 H             | 207                  | 39.2             | 4.4                      |
| 7   | #10400.00   | 62.7 PK                 | 74.0           | -11.3       | 1.33 H             | 350                  | 49.1             | 13.6                     |
| 8   | #10400.00   | 50.8 AV                 | 54.0           | -3.2        | 1.33 H             | 350                  | 37.2             | 13.6                     |
| 9   | 15600.00    | 53.7 PK                 | 74.0           | -20.3       | 1.44 H             | 210                  | 40.3             | 13.4                     |
| 10  | 15600.00    | 43.0 AV                 | 54.0           | -11.0       | 1.44 H             | 210                  | 29.6             | 13.4                     |
| 11  | 20800.00    | -                       | -              | -           | -                  | -                    | -                | -                        |
| 12  | #26000.00   | -                       | -              | -           | -                  | -                    | -                | -                        |
| 13  | 31200.00    | -                       | -              | -           | -                  | -                    | -                | -                        |
| 14  | #36400.00   | -                       | -              | -           | -                  | -                    | -                | -                        |

**REMARKS:**

- Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
- Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
- The other emission levels were very low against the limit.
- Margin value = Emission Level – Limit value
- " \* ": Fundamental frequency (主頻).
- " # ": The radiated frequency is out of the restricted band.
- " - ": The emission levels were too low to be detected.
- The blank is not available, the limit of fundamental frequency was restricted at the output power.

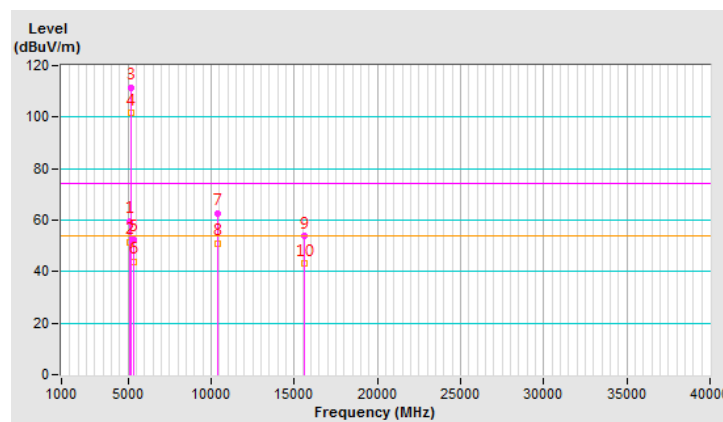


|         |                 |         |                                                |
|---------|-----------------|---------|------------------------------------------------|
| 操作模式：   | 發射              | 調變技術：   | OFDM                                           |
| 基本波頻率：  | CH 40：5200 MHz  | 測試儀器：   | (PK) RB=1MHz, VB=3MHz<br>(AV) RB=1MHz, VB=10Hz |
| 量測場地溫度： | 22°C            | 量測場地濕度： | 64%RH                                          |
| 測試日期：   | 106 年 10 月 27 日 | 測試者：    | 陳志毅                                            |

| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M |                |                               |                   |                |                          |                            |                        |                                |
|---------------------------------------------------|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| NO.                                               | FREQ.<br>(MHz) | EMISSION<br>LEVEL<br>(dBuV/m) | LIMIT<br>(dBuV/m) | MARGIN<br>(dB) | ANTENNA<br>HEIGHT<br>(m) | TABLE<br>ANGLE<br>(Degree) | RAW<br>VALUE<br>(dBuV) | CORRECTION<br>FACTOR<br>(dB/m) |
| 1                                                 | 5115.00        | 62.6 PK                       | 74.0              | -11.4          | 1.86 V                   | 173                        | 58.7                   | 3.9                            |
| 2                                                 | 5115.00        | 53.9 AV                       | 54.0              | -0.1           | 1.86 V                   | 173                        | 50.0                   | 3.9                            |
| 3                                                 | *5200.00       | 117.6 PK                      |                   |                | 1.86 V                   | 173                        | 113.6                  | 4.0                            |
| 4                                                 | *5200.00       | 108.1 AV                      |                   |                | 1.86 V                   | 173                        | 104.1                  | 4.0                            |
| 5                                                 | 5355.00        | 55.2 PK                       | 74.0              | -18.8          | 1.86 V                   | 174                        | 50.8                   | 4.4                            |
| 6                                                 | 5355.00        | 46.1 AV                       | 54.0              | -7.9           | 1.86 V                   | 174                        | 41.7                   | 4.4                            |
| 7                                                 | #10400.00      | 65.8 PK                       | 74.0              | -8.2           | 2.12 V                   | 40                         | 52.2                   | 13.6                           |
| 8                                                 | #10400.00      | 53.0 AV                       | 54.0              | -1.0           | 2.12 V                   | 40                         | 39.4                   | 13.6                           |
| 9                                                 | 15600.00       | 52.6 PK                       | 74.0              | -21.4          | 1.99 V                   | 200                        | 39.2                   | 13.4                           |
| 10                                                | 15600.00       | 40.3 AV                       | 54.0              | -13.7          | 1.99 V                   | 200                        | 26.9                   | 13.4                           |
| 11                                                | 20800.00       | -                             | -                 | -              | -                        | -                          | -                      | -                              |
| 12                                                | #26000.00      | -                             | -                 | -              | -                        | -                          | -                      | -                              |
| 13                                                | 31200.00       | -                             | -                 | -              | -                        | -                          | -                      | -                              |
| 14                                                | #36400.00      | -                             | -                 | -              | -                        | -                          | -                      | -                              |

#### REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

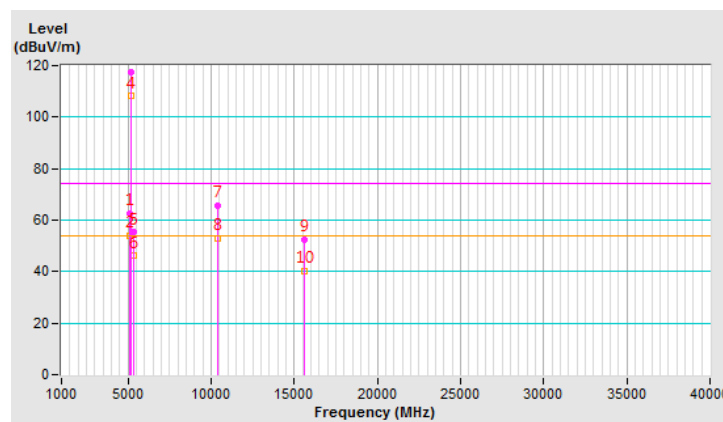


|         |                 |         |                                                |
|---------|-----------------|---------|------------------------------------------------|
| 操作模式：   | 發射              | 調變技術：   | OFDM                                           |
| 基本波頻率：  | CH 48：5240 MHz  | 測試儀器：   | (PK) RB=1MHz, VB=3MHz<br>(AV) RB=1MHz, VB=10Hz |
| 量測場地溫度： | 22℃             | 量測場地濕度： | 64%RH                                          |
| 測試日期：   | 106 年 10 月 27 日 | 測試者：    | 陳志毅                                            |

#### ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
|-----|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| 1   | *5240.00    | 116.9 PK                |                |             | 1.05 H             | 207                  | 112.7            | 4.2                      |
| 2   | *5240.00    | 106.0 AV                |                |             | 1.05 H             | 207                  | 101.8            | 4.2                      |
| 3   | 5398.00     | 55.4 PK                 | 74.0           | -18.6       | 1.05 H             | 207                  | 51.0             | 4.4                      |
| 4   | 5398.00     | 46.4 AV                 | 54.0           | -7.6        | 1.05 H             | 207                  | 42.0             | 4.4                      |
| 5   | #10480.00   | 62.8 PK                 | 74.0           | -11.2       | 1.27 H             | 360                  | 49.1             | 13.7                     |
| 6   | #10480.00   | 50.3 AV                 | 54.0           | -3.7        | 1.27 H             | 360                  | 36.6             | 13.7                     |
| 7   | 15720.00    | 53.8 PK                 | 74.0           | -20.2       | 1.49 H             | 196                  | 39.8             | 14.0                     |
| 8   | 15720.00    | 43.0 AV                 | 54.0           | -11.0       | 1.49 H             | 196                  | 29.0             | 14.0                     |
| 9   | 20960.00    | -                       | -              | -           | -                  | -                    | -                | -                        |
| 10  | #26200.00   | -                       | -              | -           | -                  | -                    | -                | -                        |
| 11  | 31440.00    | -                       | -              | -           | -                  | -                    | -                | -                        |
| 12  | #36680.00   | -                       | -              | -           | -                  | -                    | -                | -                        |

#### REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

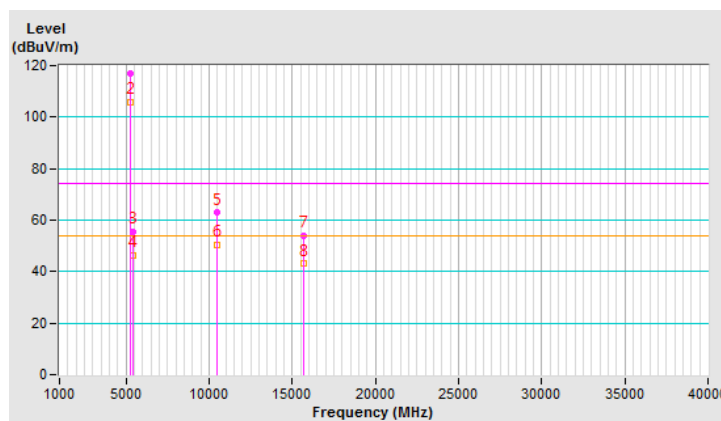


|         |                 |         |                                                |
|---------|-----------------|---------|------------------------------------------------|
| 操作模式：   | 發射              | 調變技術：   | OFDM                                           |
| 基本波頻率：  | CH 48：5240 MHz  | 測試儀器：   | (PK) RB=1MHz, VB=3MHz<br>(AV) RB=1MHz, VB=10Hz |
| 量測場地溫度： | 22°C            | 量測場地濕度： | 64%RH                                          |
| 測試日期：   | 106 年 10 月 27 日 | 測試者：    | 陳志毅                                            |

| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M |             |                         |                |             |                    |                      |                  |                          |
|---------------------------------------------------|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| NO.                                               | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
| 1                                                 | *5240.00    | 122.9 PK                |                |             | 1.89 V             | 193                  | 118.7            | 4.2                      |
| 2                                                 | *5240.00    | 112.6 AV                |                |             | 1.89 V             | 193                  | 108.4            | 4.2                      |
| 3                                                 | 5398.00     | 58.3 PK                 | 74.0           | -15.7       | 1.89 V             | 193                  | 53.9             | 4.4                      |
| 4                                                 | 5398.00     | 48.9 AV                 | 54.0           | -5.1        | 1.89 V             | 193                  | 44.5             | 4.4                      |
| 5                                                 | #10480.00   | 65.8 PK                 | 74.0           | -8.2        | 2.09 V             | 40                   | 52.1             | 13.7                     |
| 6                                                 | #10480.00   | 53.4 AV                 | 54.0           | -0.6        | 2.09 V             | 40                   | 39.7             | 13.7                     |
| 7                                                 | 15720.00    | 53.4 PK                 | 74.0           | -20.6       | 2.06 V             | 205                  | 39.4             | 14.0                     |
| 8                                                 | 15720.00    | 41.1 AV                 | 54.0           | -12.9       | 2.06 V             | 205                  | 27.1             | 14.0                     |
| 9                                                 | 20960.00    | -                       | -              | -           | -                  | -                    | -                | -                        |
| 10                                                | #26200.00   | -                       | -              | -           | -                  | -                    | -                | -                        |
| 11                                                | 31440.00    | -                       | -              | -           | -                  | -                    | -                | -                        |
| 12                                                | #36680.00   | -                       | -              | -           | -                  | -                    | -                | -                        |

#### REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

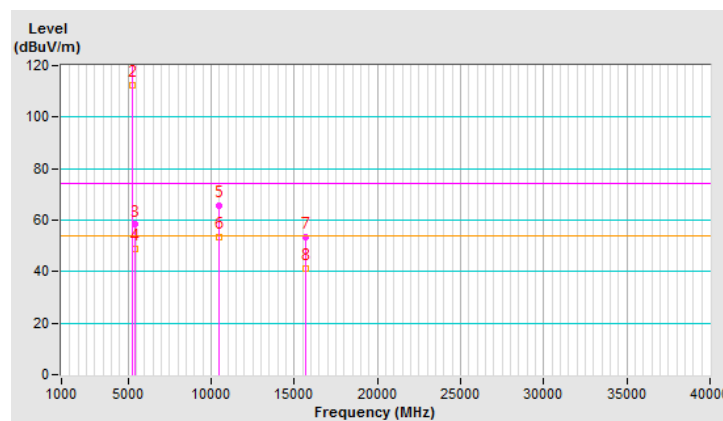


|         |                 |         |                                                |
|---------|-----------------|---------|------------------------------------------------|
| 操作模式：   | 發射              | 調變技術：   | OFDM                                           |
| 基本波頻率：  | CH 52：5260 MHz  | 測試儀器：   | (PK) RB=1MHz, VB=3MHz<br>(AV) RB=1MHz, VB=10Hz |
| 量測場地溫度： | 22°C            | 量測場地濕度： | 64%RH                                          |
| 測試日期：   | 106 年 10 月 27 日 | 測試者：    | 陳志毅                                            |

| ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M |             |                         |                |             |                    |                      |                  |                          |
|-----------------------------------------------------|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| NO.                                                 | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
| 1                                                   | 5046.00     | 54.1 PK                 | 74.0           | -19.9       | 1.04 H             | 187                  | 50.2             | 3.9                      |
| 2                                                   | 5046.00     | 46.1 AV                 | 54.0           | -7.9        | 1.04 H             | 187                  | 42.2             | 3.9                      |
| 3                                                   | *5260.00    | 112.3 PK                |                |             | 1.04 H             | 187                  | 108.1            | 4.2                      |
| 4                                                   | *5260.00    | 101.4 AV                |                |             | 1.04 H             | 187                  | 97.2             | 4.2                      |
| 5                                                   | 5415.00     | 51.3 PK                 | 74.0           | -22.7       | 1.04 H             | 187                  | 46.9             | 4.4                      |
| 6                                                   | 5415.00     | 41.4 AV                 | 54.0           | -12.6       | 1.04 H             | 187                  | 37.0             | 4.4                      |
| 7                                                   | #10520.00   | 62.8 PK                 | 74.0           | -11.2       | 1.29 H             | 360                  | 49.0             | 13.8                     |
| 8                                                   | #10520.00   | 50.7 AV                 | 54.0           | -3.3        | 1.29 H             | 360                  | 36.9             | 13.8                     |
| 9                                                   | 15780.00    | 53.7 PK                 | 74.0           | -20.3       | 1.39 H             | 190                  | 39.6             | 14.1                     |
| 10                                                  | 15780.00    | 42.9 AV                 | 54.0           | -11.1       | 1.39 H             | 190                  | 28.8             | 14.1                     |
| 11                                                  | 21040.00    | -                       | -              | -           | -                  | -                    | -                | -                        |
| 12                                                  | #26300.00   | -                       | -              | -           | -                  | -                    | -                | -                        |
| 13                                                  | 31560.00    | -                       | -              | -           | -                  | -                    | -                | -                        |
| 14                                                  | #36820.00   | -                       | -              | -           | -                  | -                    | -                | -                        |

#### REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

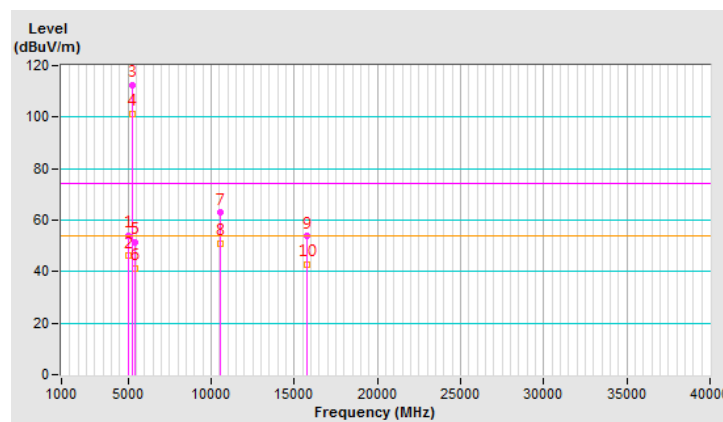


|         |                 |         |                                                |
|---------|-----------------|---------|------------------------------------------------|
| 操作模式：   | 發射              | 調變技術：   | OFDM                                           |
| 基本波頻率：  | CH 52：5260 MHz  | 測試儀器：   | (PK) RB=1MHz, VB=3MHz<br>(AV) RB=1MHz, VB=10Hz |
| 量測場地溫度： | 22°C            | 量測場地濕度： | 64%RH                                          |
| 測試日期：   | 106 年 10 月 27 日 | 測試者：    | 陳志毅                                            |

| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M |             |                         |                |             |                    |                      |                  |                          |
|---------------------------------------------------|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| NO.                                               | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
| 1                                                 | 5046.00     | 57.0 PK                 | 74.0           | -17.0       | 1.77 V             | 173                  | 53.1             | 3.9                      |
| 2                                                 | 5046.00     | 48.6 AV                 | 54.0           | -5.4        | 1.77 V             | 173                  | 44.7             | 3.9                      |
| 3                                                 | *5260.00    | 118.3 PK                |                |             | 1.77 V             | 173                  | 114.1            | 4.2                      |
| 4                                                 | *5260.00    | 108.0 AV                |                |             | 1.77 V             | 173                  | 103.8            | 4.2                      |
| 5                                                 | 5415.00     | 54.2 PK                 | 74.0           | -19.8       | 1.77 V             | 173                  | 49.8             | 4.4                      |
| 6                                                 | 5415.00     | 43.9 AV                 | 54.0           | -10.1       | 1.77 V             | 173                  | 39.5             | 4.4                      |
| 7                                                 | #10520.00   | 66.0 PK                 | 74.0           | -8.0        | 2.10 V             | 29                   | 52.2             | 13.8                     |
| 8                                                 | #10520.00   | 53.6 AV                 | 54.0           | -0.4        | 2.10 V             | 29                   | 39.8             | 13.8                     |
| 9                                                 | 15780.00    | 52.8 PK                 | 74.0           | -21.2       | 2.02 V             | 219                  | 38.7             | 14.1                     |
| 10                                                | 15780.00    | 40.7 AV                 | 54.0           | -13.3       | 2.02 V             | 219                  | 26.6             | 14.1                     |
| 11                                                | 21040.00    | -                       | -              | -           | -                  | -                    | -                | -                        |
| 12                                                | #26300.00   | -                       | -              | -           | -                  | -                    | -                | -                        |
| 13                                                | 31560.00    | -                       | -              | -           | -                  | -                    | -                | -                        |
| 14                                                | #36820.00   | -                       | -              | -           | -                  | -                    | -                | -                        |

#### REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

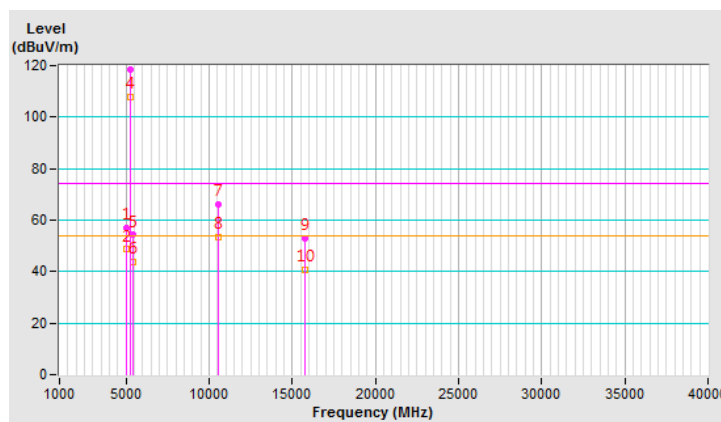


|         |                 |         |                                                |
|---------|-----------------|---------|------------------------------------------------|
| 操作模式：   | 發射              | 調變技術：   | OFDM                                           |
| 基本波頻率：  | CH 60：5300 MHz  | 測試儀器：   | (PK) RB=1MHz, VB=3MHz<br>(AV) RB=1MHz, VB=10Hz |
| 量測場地溫度： | 22°C            | 量測場地濕度： | 64%RH                                          |
| 測試日期：   | 106 年 10 月 27 日 | 測試者：    | 陳志毅                                            |

| ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M |             |                         |                |             |                    |                      |                  |                          |
|-----------------------------------------------------|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| NO.                                                 | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
| 1                                                   | 5077.00     | 56.3 PK                 | 74.0           | -17.7       | 1.06 H             | 195                  | 52.4             | 3.9                      |
| 2                                                   | 5077.00     | 46.5 AV                 | 54.0           | -7.5        | 1.06 H             | 195                  | 42.6             | 3.9                      |
| 3                                                   | *5300.00    | 112.3 PK                |                |             | 1.06 H             | 195                  | 108.0            | 4.3                      |
| 4                                                   | *5300.00    | 101.4 AV                |                |             | 1.06 H             | 195                  | 97.1             | 4.3                      |
| 5                                                   | 5378.00     | 58.8 PK                 | 74.0           | -15.2       | 1.06 H             | 195                  | 54.4             | 4.4                      |
| 6                                                   | 5378.00     | 49.8 AV                 | 54.0           | -4.2        | 1.06 H             | 195                  | 45.4             | 4.4                      |
| 7                                                   | 10600.00    | 62.3 PK                 | 74.0           | -11.7       | 1.25 H             | 360                  | 48.5             | 13.8                     |
| 8                                                   | 10600.00    | 50.3 AV                 | 54.0           | -3.7        | 1.25 H             | 360                  | 36.5             | 13.8                     |
| 9                                                   | 15900.00    | 53.4 PK                 | 74.0           | -20.6       | 1.46 H             | 194                  | 40.2             | 13.2                     |
| 10                                                  | 15900.00    | 42.5 AV                 | 54.0           | -11.5       | 1.46 H             | 194                  | 29.3             | 13.2                     |
| 11                                                  | 21200.00    | -                       | -              | -           | -                  | -                    | -                | -                        |
| 12                                                  | #26500.00   | -                       | -              | -           | -                  | -                    | -                | -                        |
| 13                                                  | 31800.00    | -                       | -              | -           | -                  | -                    | -                | -                        |
| 14                                                  | #37100.00   | -                       | -              | -           | -                  | -                    | -                | -                        |

#### REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

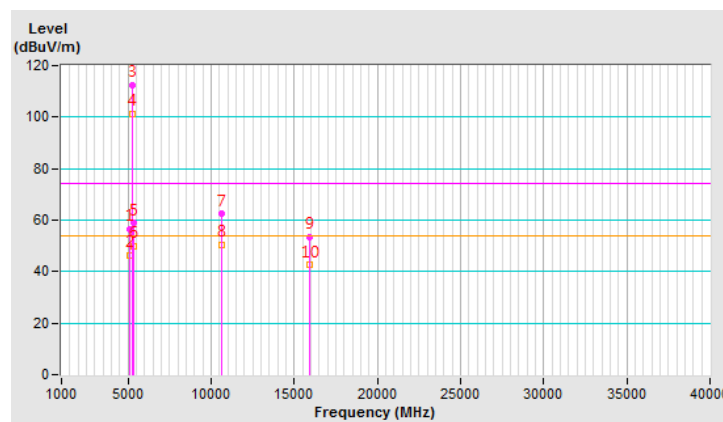


|         |                 |         |                                                |
|---------|-----------------|---------|------------------------------------------------|
| 操作模式：   | 發射              | 調變技術：   | OFDM                                           |
| 基本波頻率：  | CH 60：5300 MHz  | 測試儀器：   | (PK) RB=1MHz, VB=3MHz<br>(AV) RB=1MHz, VB=10Hz |
| 量測場地溫度： | 22°C            | 量測場地濕度： | 64%RH                                          |
| 測試日期：   | 106 年 10 月 27 日 | 測試者：    | 陳志毅                                            |

| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M |                |                               |                   |                |                          |                            |                        |                                |
|---------------------------------------------------|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| NO.                                               | FREQ.<br>(MHz) | EMISSION<br>LEVEL<br>(dBuV/m) | LIMIT<br>(dBuV/m) | MARGIN<br>(dB) | ANTENNA<br>HEIGHT<br>(m) | TABLE<br>ANGLE<br>(Degree) | RAW<br>VALUE<br>(dBuV) | CORRECTION<br>FACTOR<br>(dB/m) |
| 1                                                 | 5077.00        | 59.2 PK                       | 74.0              | -14.8          | 1.79 V                   | 184                        | 55.3                   | 3.9                            |
| 2                                                 | 5077.00        | 49.0 AV                       | 54.0              | -5.0           | 1.79 V                   | 184                        | 45.1                   | 3.9                            |
| 3                                                 | *5300.00       | 118.3 PK                      |                   |                | 1.79 V                   | 184                        | 114.0                  | 4.3                            |
| 4                                                 | *5300.00       | 108.0 AV                      |                   |                | 1.79 V                   | 184                        | 103.7                  | 4.3                            |
| 5                                                 | 5378.00        | 61.7 PK                       | 74.0              | -12.3          | 1.79 V                   | 184                        | 57.3                   | 4.4                            |
| 6                                                 | 5378.00        | 52.3 AV                       | 54.0              | -1.7           | 1.79 V                   | 184                        | 47.9                   | 4.4                            |
| 7                                                 | 10600.00       | 65.7 PK                       | 74.0              | -8.3           | 2.06 V                   | 47                         | 51.9                   | 13.8                           |
| 8                                                 | 10600.00       | 53.0 AV                       | 54.0              | -1.0           | 2.06 V                   | 47                         | 39.2                   | 13.8                           |
| 9                                                 | 15900.00       | 53.0 PK                       | 74.0              | -21.0          | 2.04 V                   | 207                        | 39.8                   | 13.2                           |
| 10                                                | 15900.00       | 40.6 AV                       | 54.0              | -13.4          | 2.04 V                   | 207                        | 27.4                   | 13.2                           |
| 11                                                | 21200.00       | -                             | -                 | -              | -                        | -                          | -                      | -                              |
| 12                                                | #26500.00      | -                             | -                 | -              | -                        | -                          | -                      | -                              |
| 13                                                | 31800.00       | -                             | -                 | -              | -                        | -                          | -                      | -                              |
| 14                                                | #37100.00      | -                             | -                 | -              | -                        | -                          | -                      | -                              |

#### REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

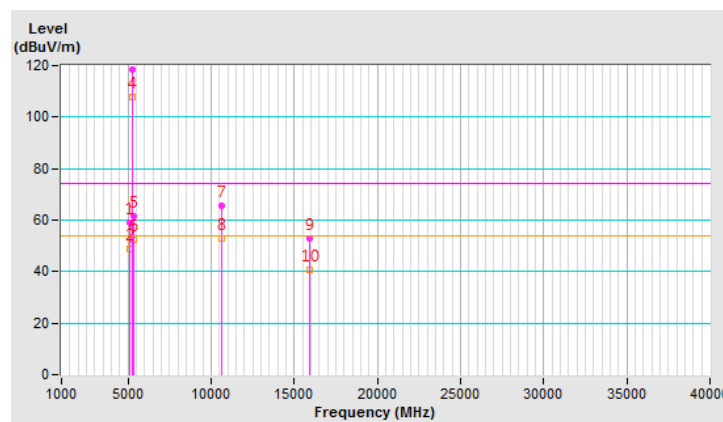


|         |                 |         |                                                |
|---------|-----------------|---------|------------------------------------------------|
| 操作模式：   | 發射              | 調變技術：   | OFDM                                           |
| 基本波頻率：  | CH 64：5320 MHz  | 測試儀器：   | (PK) RB=1MHz, VB=3MHz<br>(AV) RB=1MHz, VB=10Hz |
| 量測場地溫度： | 22°C            | 量測場地濕度： | 64%RH                                          |
| 測試日期：   | 106 年 10 月 27 日 | 測試者：    | 陳志毅                                            |

#### ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
|-----|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| 1   | *5320.00    | 111.8 PK                |                |             | 1.02 H             | 198                  | 107.5            | 4.3                      |
| 2   | *5320.00    | 100.9 AV                |                |             | 1.02 H             | 198                  | 96.6             | 4.3                      |
| 3   | 5395.00     | 62.7 PK                 | 74.0           | -11.3       | 1.02 H             | 198                  | 58.3             | 4.4                      |
| 4   | 5395.00     | 48.8 AV                 | 54.0           | -5.2        | 1.02 H             | 198                  | 44.4             | 4.4                      |
| 5   | 10640.00    | 62.3 PK                 | 74.0           | -11.7       | 1.23 H             | 345                  | 48.3             | 14.0                     |
| 6   | 10640.00    | 50.3 AV                 | 54.0           | -3.7        | 1.23 H             | 345                  | 36.3             | 14.0                     |
| 7   | 15960.00    | 53.7 PK                 | 74.0           | -20.3       | 1.44 H             | 214                  | 40.2             | 13.5                     |
| 8   | 15960.00    | 43.0 AV                 | 54.0           | -11.0       | 1.44 H             | 214                  | 29.5             | 13.5                     |
| 9   | 21280.00    | -                       | -              | -           | -                  | -                    | -                | -                        |
| 10  | #26600.00   | -                       | -              | -           | -                  | -                    | -                | -                        |
| 11  | #31920.00   | -                       | -              | -           | -                  | -                    | -                | -                        |
| 12  | #37240.00   | -                       | -              | -           | -                  | -                    | -                | -                        |

#### REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

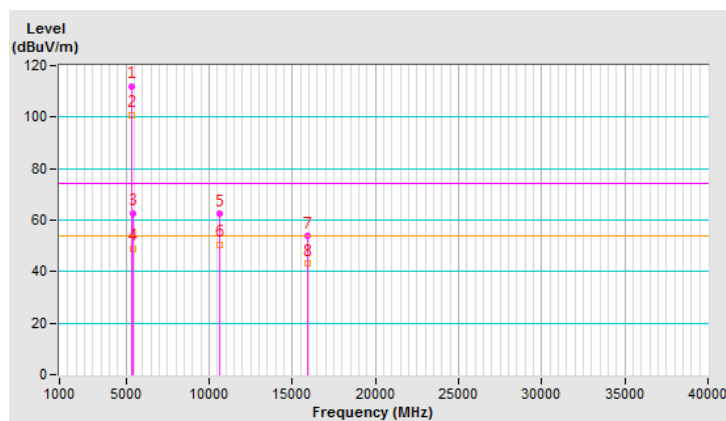


|         |                 |         |                                                |
|---------|-----------------|---------|------------------------------------------------|
| 操作模式：   | 發射              | 調變技術：   | OFDM                                           |
| 基本波頻率：  | CH 64：5320 MHz  | 測試儀器：   | (PK) RB=1MHz, VB=3MHz<br>(AV) RB=1MHz, VB=10Hz |
| 量測場地溫度： | 22℃             | 量測場地濕度： | 64%RH                                          |
| 測試日期：   | 106 年 10 月 27 日 | 測試者：    | 陳志毅                                            |

| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M |             |                         |                |             |                    |                      |                  |                          |
|---------------------------------------------------|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| NO.                                               | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
| 1                                                 | *5320.00    | 117.8 PK                |                |             | 1.76 V             | 173                  | 113.5            | 4.3                      |
| 2                                                 | *5320.00    | 107.5 AV                |                |             | 1.76 V             | 173                  | 103.2            | 4.3                      |
| 3                                                 | 5395.00     | 65.6 PK                 | 74.0           | -8.4        | 1.76 V             | 173                  | 61.2             | 4.4                      |
| 4                                                 | 5395.00     | 51.3 AV                 | 54.0           | -2.7        | 1.76 V             | 173                  | 46.9             | 4.4                      |
| 5                                                 | 10640.00    | 65.8 PK                 | 74.0           | -8.2        | 2.05 V             | 39                   | 51.8             | 14.0                     |
| 6                                                 | 10640.00    | 53.3 AV                 | 54.0           | -0.7        | 2.05 V             | 39                   | 39.3             | 14.0                     |
| 7                                                 | 15960.00    | 53.2 PK                 | 74.0           | -20.8       | 2.00 V             | 208                  | 39.7             | 13.5                     |
| 8                                                 | 15960.00    | 40.7 AV                 | 54.0           | -13.3       | 2.00 V             | 208                  | 27.2             | 13.5                     |
| 9                                                 | 21280.00    | -                       | -              | -           | -                  | -                    | -                | -                        |
| 10                                                | #26600.00   | -                       | -              | -           | -                  | -                    | -                | -                        |
| 11                                                | #31920.00   | -                       | -              | -           | -                  | -                    | -                | -                        |
| 12                                                | #37240.00   | -                       | -              | -           | -                  | -                    | -                | -                        |

#### REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

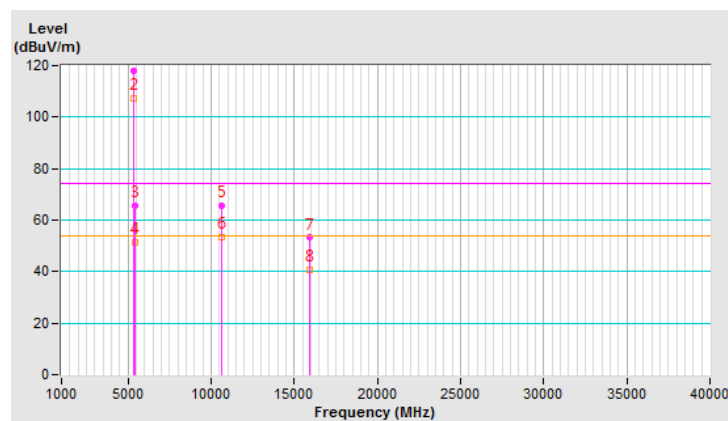


|         |                 |         |                                                |
|---------|-----------------|---------|------------------------------------------------|
| 操作模式：   | 發射              | 調變技術：   | OFDM                                           |
| 基本波頻率：  | CH 100：5500 MHz | 測試儀器：   | (PK) RB=1MHz, VB=3MHz<br>(AV) RB=1MHz, VB=10Hz |
| 量測場地溫度： | 22°C            | 量測場地濕度： | 64%RH                                          |
| 測試日期：   | 106 年 10 月 27 日 | 測試者：    | 陳志毅                                            |

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

| NO. | FREQ.<br>(MHz) | EMISSION<br>LEVEL<br>(dBuV/m) | LIMIT<br>(dBuV/m) | MARGIN<br>(dB) | ANTENNA<br>HEIGHT<br>(m) | TABLE<br>ANGLE<br>(Degree) | RAW<br>VALUE<br>(dBuV) | CORRECTION<br>FACTOR<br>(dB/m) |
|-----|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| 1   | 5041.00        | 50.7 PK                       | 74.0              | -23.3          | 1.12 H                   | 209                        | 46.8                   | 3.9                            |
| 2   | 5041.00        | 41.8 AV                       | 54.0              | -12.2          | 1.12 H                   | 209                        | 37.9                   | 3.9                            |
| 3   | #5470.00       | 68.3 PK                       | 74.0              | -5.7           | 1.12 H                   | 209                        | 63.8                   | 4.5                            |
| 4   | #5470.00       | 44.5 AV                       | 54.0              | -9.5           | 1.12 H                   | 209                        | 40.0                   | 4.5                            |
| 5   | *5500.00       | 110.3 PK                      |                   |                | 1.12 H                   | 209                        | 105.8                  | 4.5                            |
| 6   | *5500.00       | 98.7 AV                       |                   |                | 1.12 H                   | 209                        | 94.2                   | 4.5                            |
| 7   | #5729.00       | 54.7 PK                       | 74.0              | -19.3          | 1.12 H                   | 209                        | 49.8                   | 4.9                            |
| 8   | #5729.00       | 46.3 AV                       | 54.0              | -7.7           | 1.12 H                   | 209                        | 41.4                   | 4.9                            |
| 9   | 11000.00       | 62.7 PK                       | 74.0              | -11.3          | 1.28 H                   | 355                        | 47.9                   | 14.8                           |
| 10  | 11000.00       | 50.4 AV                       | 54.0              | -3.6           | 1.28 H                   | 355                        | 35.6                   | 14.8                           |
| 11  | #16500.00      | 54.0 PK                       | 74.0              | -20.0          | 1.41 H                   | 217                        | 38.4                   | 15.6                           |
| 12  | #16500.00      | 42.9 AV                       | 54.0              | -11.1          | 1.41 H                   | 217                        | 27.3                   | 15.6                           |
| 13  | #22000.00      | -                             | -                 | -              | -                        | -                          | -                      | -                              |
| 14  | #27500.00      | -                             | -                 | -              | -                        | -                          | -                      | -                              |
| 15  | #33000.00      | -                             | -                 | -              | -                        | -                          | -                      | -                              |
| 16  | #38500.00      | -                             | -                 | -              | -                        | -                          | -                      | -                              |

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

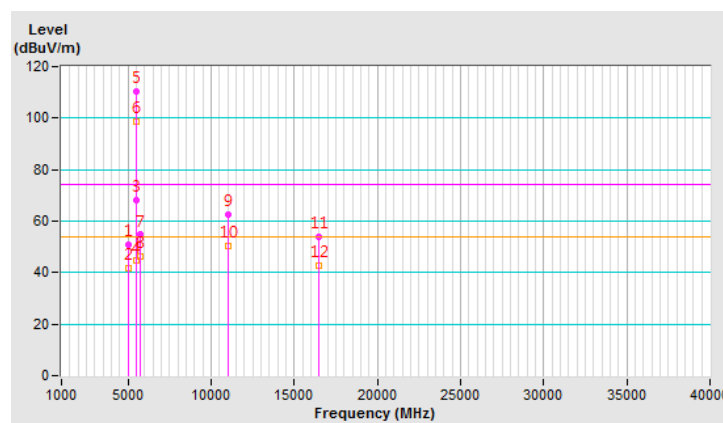


|         |                 |         |                                                |
|---------|-----------------|---------|------------------------------------------------|
| 操作模式：   | 發射              | 調變技術：   | OFDM                                           |
| 基本波頻率：  | CH 100：5500 MHz | 測試儀器：   | (PK) RB=1MHz, VB=3MHz<br>(AV) RB=1MHz, VB=10Hz |
| 量測場地溫度： | 22°C            | 量測場地濕度： | 64%RH                                          |
| 測試日期：   | 106 年 10 月 27 日 | 測試者：    | 陳志毅                                            |

| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M |                |                               |                   |                |                          |                            |                        |                                |
|---------------------------------------------------|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| NO.                                               | FREQ.<br>(MHz) | EMISSION<br>LEVEL<br>(dBuV/m) | LIMIT<br>(dBuV/m) | MARGIN<br>(dB) | ANTENNA<br>HEIGHT<br>(m) | TABLE<br>ANGLE<br>(Degree) | RAW<br>VALUE<br>(dBuV) | CORRECTION<br>FACTOR<br>(dB/m) |
| 1                                                 | 5041.00        | 53.6 PK                       | 74.0              | -20.4          | 1.65 V                   | 180                        | 49.7                   | 3.9                            |
| 2                                                 | 5041.00        | 44.3 AV                       | 54.0              | -9.7           | 1.65 V                   | 180                        | 40.4                   | 3.9                            |
| 3                                                 | #5470.00       | 71.2 PK                       | 74.0              | -2.8           | 1.67 V                   | 185                        | 66.7                   | 4.5                            |
| 4                                                 | #5470.00       | 47.0 AV                       | 54.0              | -7.0           | 1.67 V                   | 185                        | 42.5                   | 4.5                            |
| 5                                                 | *5500.00       | 116.3 PK                      |                   |                | 1.67 V                   | 185                        | 111.8                  | 4.5                            |
| 6                                                 | *5500.00       | 105.3 AV                      |                   |                | 1.67 V                   | 185                        | 100.8                  | 4.5                            |
| 7                                                 | #5729.00       | 57.6 PK                       | 74.0              | -16.4          | 1.67 V                   | 185                        | 52.7                   | 4.9                            |
| 8                                                 | #5729.00       | 48.8 AV                       | 54.0              | -5.2           | 1.67 V                   | 185                        | 43.9                   | 4.9                            |
| 9                                                 | 11000.00       | 65.7 PK                       | 74.0              | -8.3           | 2.13 V                   | 37                         | 50.9                   | 14.8                           |
| 10                                                | 11000.00       | 53.3 AV                       | 54.0              | -0.7           | 2.13 V                   | 37                         | 38.5                   | 14.8                           |
| 11                                                | #16500.00      | 53.2 PK                       | 74.0              | -20.8          | 2.04 V                   | 222                        | 37.6                   | 15.6                           |
| 12                                                | #16500.00      | 41.1 AV                       | 54.0              | -12.9          | 2.04 V                   | 222                        | 25.5                   | 15.6                           |
| 13                                                | #22000.00      | -                             | -                 | -              | -                        | -                          | -                      | -                              |
| 14                                                | #27500.00      | -                             | -                 | -              | -                        | -                          | -                      | -                              |
| 15                                                | #33000.00      | -                             | -                 | -              | -                        | -                          | -                      | -                              |
| 16                                                | #38500.00      | -                             | -                 | -              | -                        | -                          | -                      | -                              |

#### REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

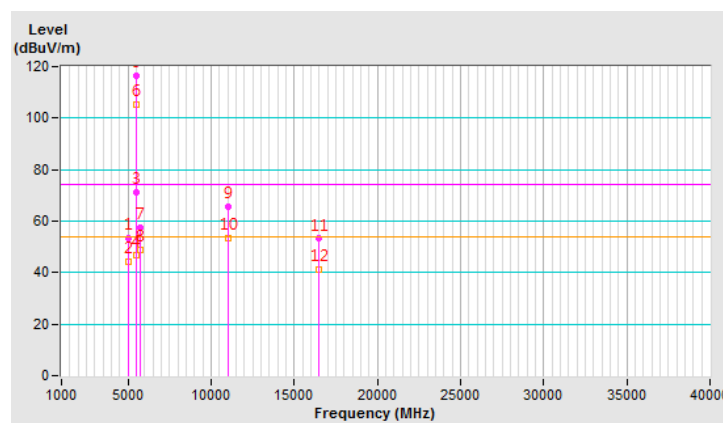


|         |                 |         |                                                |
|---------|-----------------|---------|------------------------------------------------|
| 操作模式：   | 發射              | 調變技術：   | OFDM                                           |
| 基本波頻率：  | CH 116：5580 MHz | 測試儀器：   | (PK) RB=1MHz, VB=3MHz<br>(AV) RB=1MHz, VB=10Hz |
| 量測場地溫度： | 22°C            | 量測場地濕度： | 64%RH                                          |
| 測試日期：   | 106 年 10 月 27 日 | 測試者：    | 陳志毅                                            |

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

| NO. | FREQ.<br>(MHz) | EMISSION<br>LEVEL<br>(dBuV/m) | LIMIT<br>(dBuV/m) | MARGIN<br>(dB) | ANTENNA<br>HEIGHT<br>(m) | TABLE<br>ANGLE<br>(Degree) | RAW<br>VALUE<br>(dBuV) | CORRECTION<br>FACTOR<br>(dB/m) |
|-----|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| 1   | 5418.00        | 52.5 PK                       | 74.0              | -21.5          | 1.09 H                   | 194                        | 48.0                   | 4.5                            |
| 2   | 5418.00        | 42.4 AV                       | 54.0              | -11.6          | 1.09 H                   | 194                        | 37.9                   | 4.5                            |
| 3   | *5580.00       | 109.3 PK                      |                   |                | 1.09 H                   | 194                        | 104.7                  | 4.6                            |
| 4   | *5580.00       | 98.4 AV                       |                   |                | 1.09 H                   | 194                        | 93.8                   | 4.6                            |
| 5   | #5818.00       | 53.9 PK                       | 74.0              | -20.1          | 1.09 H                   | 194                        | 48.7                   | 5.2                            |
| 6   | #5818.00       | 45.0 AV                       | 54.0              | -9.0           | 1.09 H                   | 194                        | 39.8                   | 5.2                            |
| 7   | 11160.00       | 62.7 PK                       | 74.0              | -11.3          | 1.30 H                   | 360                        | 48.3                   | 14.4                           |
| 8   | 11160.00       | 50.5 AV                       | 54.0              | -3.5           | 1.30 H                   | 360                        | 36.1                   | 14.4                           |
| 9   | #16740.00      | 54.2 PK                       | 74.0              | -19.8          | 1.48 H                   | 206                        | 37.7                   | 16.5                           |
| 10  | #16740.00      | 43.1 AV                       | 54.0              | -10.9          | 1.48 H                   | 206                        | 26.6                   | 16.5                           |
| 11  | 22320.00       | -                             | -                 | -              | -                        | -                          | -                      | -                              |
| 12  | #27900.00      | -                             | -                 | -              | -                        | -                          | -                      | -                              |
| 13  | #33480.00      | -                             | -                 | -              | -                        | -                          | -                      | -                              |
| 14  | 39060.00       | -                             | -                 | -              | -                        | -                          | -                      | -                              |

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

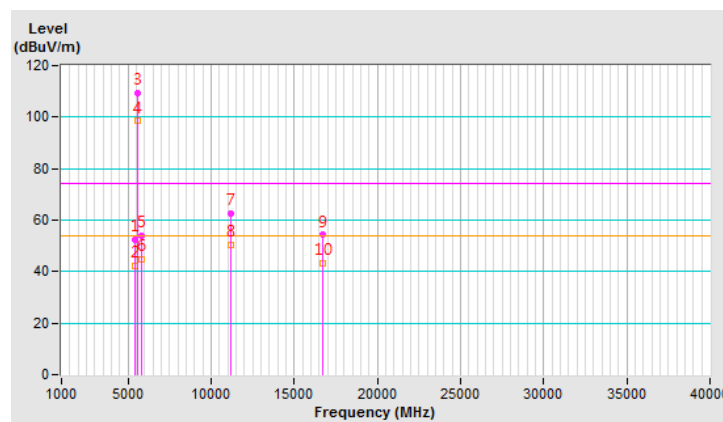


|         |                 |         |                                                |
|---------|-----------------|---------|------------------------------------------------|
| 操作模式：   | 發射              | 調變技術：   | OFDM                                           |
| 基本波頻率：  | CH 116：5580 MHz | 測試儀器：   | (PK) RB=1MHz, VB=3MHz<br>(AV) RB=1MHz, VB=10Hz |
| 量測場地溫度： | 22°C            | 量測場地濕度： | 64%RH                                          |
| 測試日期：   | 106 年 10 月 27 日 | 測試者：    | 陳志毅                                            |

| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M |             |                         |                |             |                    |                      |                  |                          |
|---------------------------------------------------|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| NO.                                               | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
| 1                                                 | 5418.00     | 55.4 PK                 | 74.0           | -18.6       | 1.68 V             | 188                  | 50.9             | 4.5                      |
| 2                                                 | 5418.00     | 44.9 AV                 | 54.0           | -9.1        | 1.68 V             | 188                  | 40.4             | 4.5                      |
| 3                                                 | *5580.00    | 115.3 PK                |                |             | 1.68 V             | 188                  | 110.7            | 4.6                      |
| 4                                                 | *5580.00    | 105.0 AV                |                |             | 1.68 V             | 188                  | 100.4            | 4.6                      |
| 5                                                 | #5818.00    | 56.8 PK                 | 74.0           | -17.2       | 1.68 V             | 188                  | 51.6             | 5.2                      |
| 6                                                 | #5818.00    | 47.5 AV                 | 54.0           | -6.5        | 1.68 V             | 188                  | 42.3             | 5.2                      |
| 7                                                 | 11160.00    | 65.5 PK                 | 74.0           | -8.5        | 2.08 V             | 34                   | 51.1             | 14.4                     |
| 8                                                 | 11160.00    | 52.8 AV                 | 54.0           | -1.2        | 2.08 V             | 34                   | 38.4             | 14.4                     |
| 9                                                 | #16740.00   | 53.4 PK                 | 74.0           | -20.6       | 1.98 V             | 202                  | 36.9             | 16.5                     |
| 10                                                | #16740.00   | 41.2 AV                 | 54.0           | -12.8       | 1.98 V             | 202                  | 24.7             | 16.5                     |
| 11                                                | 22320.00    | -                       | -              | -           | -                  | -                    | -                | -                        |
| 12                                                | #27900.00   | -                       | -              | -           | -                  | -                    | -                | -                        |
| 13                                                | #33480.00   | -                       | -              | -           | -                  | -                    | -                | -                        |
| 14                                                | 39060.00    | -                       | -              | -           | -                  | -                    | -                | -                        |

#### REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

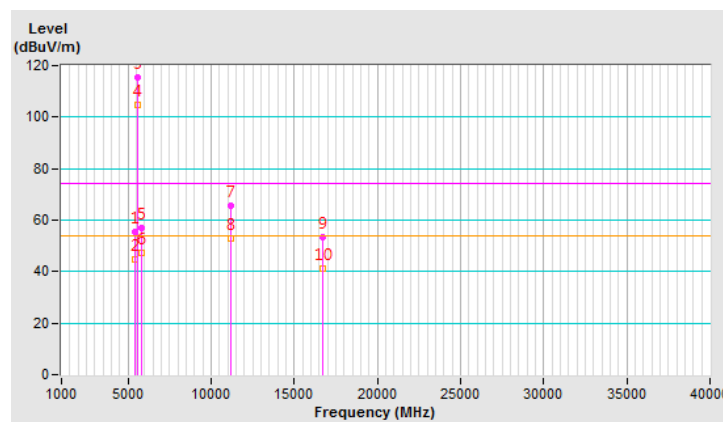


|         |                 |         |                                                |
|---------|-----------------|---------|------------------------------------------------|
| 操作模式：   | 發射              | 調變技術：   | OFDM                                           |
| 基本波頻率：  | CH 140：5700 MHz | 測試儀器：   | (PK) RB=1MHz, VB=3MHz<br>(AV) RB=1MHz, VB=10Hz |
| 量測場地溫度： | 22℃             | 量測場地濕度： | 64%RH                                          |
| 測試日期：   | 106 年 10 月 27 日 | 測試者：    | 陳志毅                                            |

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

| NO. | FREQ.<br>(MHz) | EMISSION<br>LEVEL<br>(dBuV/m) | LIMIT<br>(dBuV/m) | MARGIN<br>(dB) | ANTENNA<br>HEIGHT<br>(m) | TABLE<br>ANGLE<br>(Degree) | RAW<br>VALUE<br>(dBuV) | CORRECTION<br>FACTOR<br>(dB/m) |
|-----|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| 1   | *5700.00       | 108.9 PK                      |                   |                | 1.11 H                   | 200                        | 104.1                  | 4.8                            |
| 2   | *5700.00       | 98.8 AV                       |                   |                | 1.11 H                   | 200                        | 94.0                   | 4.8                            |
| 3   | #5778.00       | 61.5 PK                       | 74.0              | -12.5          | 1.11 H                   | 200                        | 56.5                   | 5.0                            |
| 4   | #5778.00       | 51.1 AV                       | 54.0              | -2.9           | 1.11 H                   | 200                        | 46.1                   | 5.0                            |
| 5   | 11400.00       | 62.3 PK                       | 74.0              | -11.7          | 1.24 H                   | 342                        | 47.9                   | 14.4                           |
| 6   | 11400.00       | 50.4 AV                       | 54.0              | -3.6           | 1.24 H                   | 342                        | 36.0                   | 14.4                           |
| 7   | #17100.00      | 54.0 PK                       | 74.0              | -20.0          | 1.48 H                   | 200                        | 35.5                   | 18.5                           |
| 8   | #17100.00      | 43.1 AV                       | 54.0              | -10.9          | 1.48 H                   | 200                        | 24.6                   | 18.5                           |
| 9   | 22800.00       | -                             | -                 | -              | -                        | -                          | -                      | -                              |
| 10  | #28500.00      | -                             | -                 | -              | -                        | -                          | -                      | -                              |
| 11  | #34200.00      | -                             | -                 | -              | -                        | -                          | -                      | -                              |
| 12  | 39900.00       | -                             | -                 | -              | -                        | -                          | -                      | -                              |

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

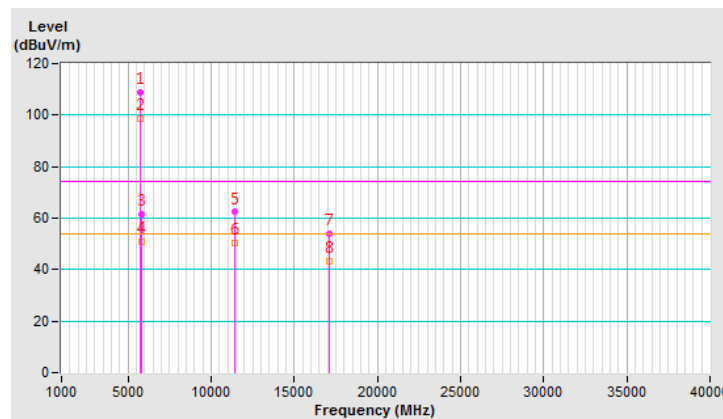


|         |                 |         |                                                |
|---------|-----------------|---------|------------------------------------------------|
| 操作模式：   | 發射              | 調變技術：   | OFDM                                           |
| 基本波頻率：  | CH 140：5700 MHz | 測試儀器：   | (PK) RB=1MHz, VB=3MHz<br>(AV) RB=1MHz, VB=10Hz |
| 量測場地溫度： | 22℃             | 量測場地濕度： | 64%RH                                          |
| 測試日期：   | 106 年 10 月 27 日 | 測試者：    | 陳志毅                                            |

| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M |             |                         |                |             |                    |                      |                  |                          |
|---------------------------------------------------|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| NO.                                               | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
| 1                                                 | *5700.00    | 114.9 PK                |                |             | 1.67 V             | 188                  | 110.1            | 4.8                      |
| 2                                                 | *5700.00    | 105.4 AV                |                |             | 1.67 V             | 188                  | 100.6            | 4.8                      |
| 3                                                 | #5778.00    | 64.4 PK                 | 74.0           | -9.6        | 1.67 V             | 188                  | 59.4             | 5.0                      |
| 4                                                 | #5778.00    | 53.6 AV                 | 54.0           | -0.4        | 1.67 V             | 188                  | 48.6             | 5.0                      |
| 5                                                 | 11400.00    | 65.6 PK                 | 74.0           | -8.4        | 2.15 V             | 31                   | 51.2             | 14.4                     |
| 6                                                 | 11400.00    | 53.2 AV                 | 54.0           | -0.8        | 2.15 V             | 31                   | 38.8             | 14.4                     |
| 7                                                 | #17100.00   | 53.5 PK                 | 74.0           | -20.5       | 2.07 V             | 206                  | 35.0             | 18.5                     |
| 8                                                 | #17100.00   | 41.0 AV                 | 54.0           | -13.0       | 2.07 V             | 206                  | 22.5             | 18.5                     |
| 9                                                 | 22800.00    | -                       | -              | -           | -                  | -                    | -                | -                        |
| 10                                                | #28500.00   | -                       | -              | -           | -                  | -                    | -                | -                        |
| 11                                                | #34200.00   | -                       | -              | -           | -                  | -                    | -                | -                        |
| 12                                                | 39900.00    | -                       | -              | -           | -                  | -                    | -                | -                        |

#### REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

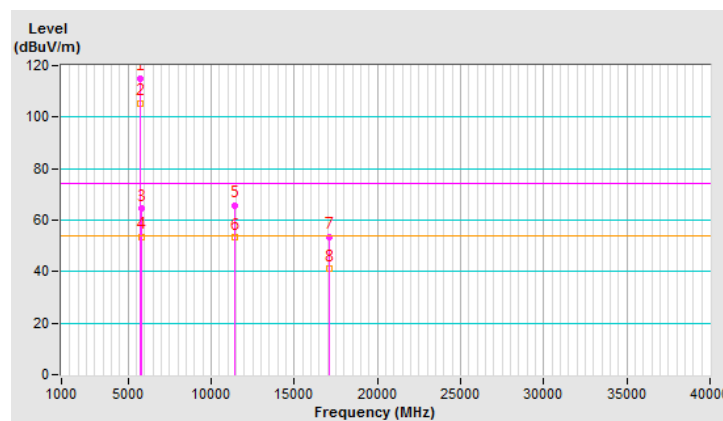


|         |                   |         |                                                |
|---------|-------------------|---------|------------------------------------------------|
| 操作模式：   | 發射                | 調變技術：   | OFDM                                           |
| 基本波頻率：  | CH 149 : 5745 MHz | 測試儀器：   | (PK) RB=1MHz, VB=3MHz<br>(AV) RB=1MHz, VB=10Hz |
| 量測場地溫度： | 22°C              | 量測場地濕度： | 64%RH                                          |
| 測試日期：   | 106 年 10 月 27 日   | 測試者：    | 陳志毅                                            |

| ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M |             |                         |                |             |                    |                      |                  |                          |
|-----------------------------------------------------|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| NO.                                                 | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
| 1                                                   | *5745.00    | 114.9 PK                |                |             | 1.07 H             | 188                  | 109.9            | 5.0                      |
| 2                                                   | *5745.00    | 105.0 AV                |                |             | 1.07 H             | 188                  | 100.0            | 5.0                      |
| 3                                                   | 11490.00    | 62.8 PK                 | 74.0           | -11.2       | 1.27 H             | 356                  | 48.7             | 14.1                     |
| 4                                                   | 11490.00    | 50.6 AV                 | 54.0           | -3.4        | 1.27 H             | 356                  | 36.5             | 14.1                     |
| 5                                                   | #17235.00   | 53.7 PK                 | 74.0           | -20.3       | 1.43 H             | 204                  | 35.4             | 18.3                     |
| 6                                                   | #17235.00   | 42.8 AV                 | 54.0           | -11.2       | 1.43 H             | 204                  | 24.5             | 18.3                     |
| 7                                                   | 22980.00    | -                       | -              | -           | -                  | -                    | -                | -                        |
| 8                                                   | #28725.00   | -                       | -              | -           | -                  | -                    | -                | -                        |
| 9                                                   | #34470.00   | -                       | -              | -           | -                  | -                    | -                | -                        |

#### REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

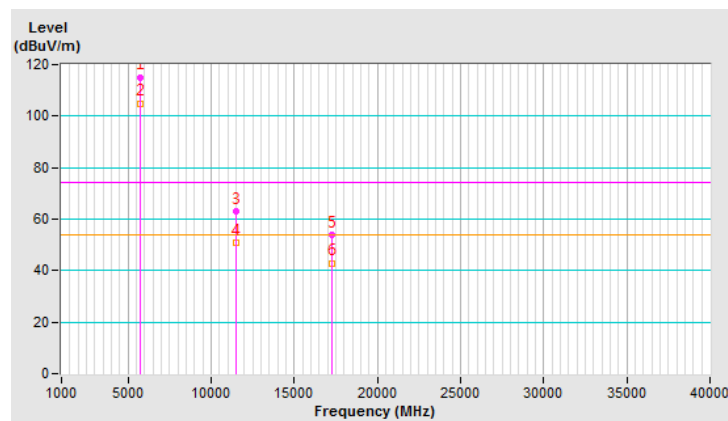


|         |                   |         |                                                |
|---------|-------------------|---------|------------------------------------------------|
| 操作模式：   | 發射                | 調變技術：   | OFDM                                           |
| 基本波頻率：  | CH 149 : 5745 MHz | 測試儀器：   | (PK) RB=1MHz, VB=3MHz<br>(AV) RB=1MHz, VB=10Hz |
| 量測場地溫度： | 22°C              | 量測場地濕度： | 64%RH                                          |
| 測試日期：   | 106 年 10 月 27 日   | 測試者：    | 陳志毅                                            |

#### ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
|-----|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| 1   | *5745.00    | 120.9 PK                |                |             | 1.53 V             | 140                  | 115.9            | 5.0                      |
| 2   | *5745.00    | 111.6 AV                |                |             | 1.53 V             | 140                  | 106.6            | 5.0                      |
| 3   | 11490.00    | 65.7 PK                 | 74.0           | -8.3        | 2.09 V             | 31                   | 51.6             | 14.1                     |
| 4   | 11490.00    | 53.1 AV                 | 54.0           | -0.9        | 2.09 V             | 31                   | 39.0             | 14.1                     |
| 5   | #17235.00   | 53.1 PK                 | 74.0           | -20.9       | 2.01 V             | 214                  | 34.8             | 18.3                     |
| 6   | #17235.00   | 40.8 AV                 | 54.0           | -13.2       | 2.01 V             | 214                  | 22.5             | 18.3                     |
| 7   | 22980.00    | -                       | -              | -           | -                  | -                    | -                | -                        |
| 8   | #28725.00   | -                       | -              | -           | -                  | -                    | -                | -                        |
| 9   | #34470.00   | -                       | -              | -           | -                  | -                    | -                | -                        |

#### REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

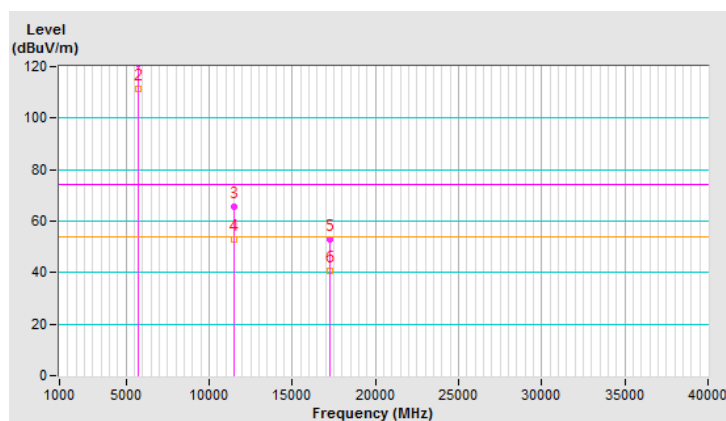


|         |                   |         |                                                |
|---------|-------------------|---------|------------------------------------------------|
| 操作模式：   | 發射                | 調變技術：   | OFDM                                           |
| 基本波頻率：  | CH 157 : 5785 MHz | 測試儀器：   | (PK) RB=1MHz, VB=3MHz<br>(AV) RB=1MHz, VB=10Hz |
| 量測場地溫度： | 22°C              | 量測場地濕度： | 64%RH                                          |
| 測試日期：   | 106 年 10 月 27 日   | 測試者：    | 陳志毅                                            |

| ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M |             |                         |                |             |                    |                      |                  |                          |
|-----------------------------------------------------|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| NO.                                                 | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
| 1                                                   | *5785.00    | 114.9 PK                |                |             | 1.12 H             | 173                  | 109.9            | 5.0                      |
| 2                                                   | *5785.00    | 104.8 AV                |                |             | 1.12 H             | 173                  | 99.8             | 5.0                      |
| 3                                                   | 11570.00    | 62.4 PK                 | 74.0           | -11.6       | 1.25 H             | 353                  | 48.4             | 14.0                     |
| 4                                                   | 11570.00    | 50.3 AV                 | 54.0           | -3.7        | 1.25 H             | 353                  | 36.3             | 14.0                     |
| 5                                                   | #17355.00   | 54.3 PK                 | 74.0           | -19.7       | 1.41 H             | 207                  | 35.4             | 18.9                     |
| 6                                                   | #17355.00   | 43.2 AV                 | 54.0           | -10.8       | 1.41 H             | 207                  | 24.3             | 18.9                     |
| 7                                                   | #23140.00   | -                       | -              | -           | -                  | -                    | -                | -                        |
| 8                                                   | #28925.00   | -                       | -              | -           | -                  | -                    | -                | -                        |
| 9                                                   | #34710.00   | -                       | -              | -           | -                  | -                    | -                | -                        |

#### REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

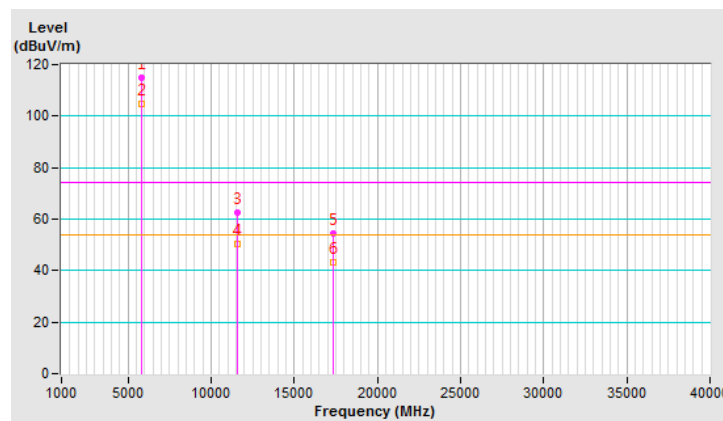


|         |                   |         |                                                |
|---------|-------------------|---------|------------------------------------------------|
| 操作模式：   | 發射                | 調變技術：   | OFDM                                           |
| 基本波頻率：  | CH 157 : 5785 MHz | 測試儀器：   | (PK) RB=1MHz, VB=3MHz<br>(AV) RB=1MHz, VB=10Hz |
| 量測場地溫度： | 22°C              | 量測場地濕度： | 64%RH                                          |
| 測試日期：   | 106 年 10 月 27 日   | 測試者：    | 陳志毅                                            |

| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M |             |                         |                |             |                    |                      |                  |                          |
|---------------------------------------------------|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| NO.                                               | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
| 1                                                 | *5785.00    | 120.4 PK                |                |             | 1.50 V             | 142                  | 115.4            | 5.0                      |
| 2                                                 | *5785.00    | 111.1 AV                |                |             | 1.50 V             | 142                  | 106.1            | 5.0                      |
| 3                                                 | 11570.00    | 66.2 PK                 | 74.0           | -7.8        | 2.07 V             | 39                   | 52.2             | 14.0                     |
| 4                                                 | 11570.00    | 53.2 AV                 | 54.0           | -0.8        | 2.07 V             | 39                   | 39.2             | 14.0                     |
| 5                                                 | #17355.00   | 53.6 PK                 | 74.0           | -20.4       | 2.06 V             | 217                  | 34.7             | 18.9                     |
| 6                                                 | #17355.00   | 41.1 AV                 | 54.0           | -12.9       | 2.06 V             | 217                  | 22.2             | 18.9                     |
| 7                                                 | #23140.00   | -                       | -              | -           | -                  | -                    | -                | -                        |
| 8                                                 | #28925.00   | -                       | -              | -           | -                  | -                    | -                | -                        |
| 9                                                 | #34710.00   | -                       | -              | -           | -                  | -                    | -                | -                        |

#### REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

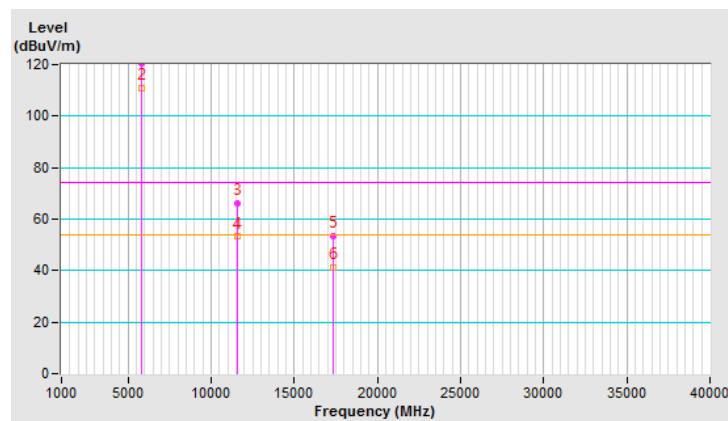


|         |                 |         |                                                |
|---------|-----------------|---------|------------------------------------------------|
| 操作模式：   | 發射              | 調變技術：   | OFDM                                           |
| 基本波頻率：  | CH 165：5825 MHz | 測試儀器：   | (PK) RB=1MHz, VB=3MHz<br>(AV) RB=1MHz, VB=10Hz |
| 量測場地溫度： | 22°C            | 量測場地濕度： | 64%RH                                          |
| 測試日期：   | 106 年 10 月 27 日 | 測試者：    | 陳志毅                                            |

| ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M |             |                         |                |             |                    |                      |                  |                          |
|-----------------------------------------------------|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| NO.                                                 | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
| 1                                                   | *5825.00    | 114.7 PK                |                |             | 1.04 H             | 186                  | 109.5            | 5.2                      |
| 2                                                   | *5825.00    | 104.9 AV                |                |             | 1.04 H             | 186                  | 99.7             | 5.2                      |
| 3                                                   | 11650.00    | 62.8 PK                 | 74.0           | -11.2       | 1.26 H             | 351                  | 48.7             | 14.1                     |
| 4                                                   | 11650.00    | 50.5 AV                 | 54.0           | -3.5        | 1.26 H             | 351                  | 36.4             | 14.1                     |
| 5                                                   | #17475.00   | 53.5 PK                 | 74.0           | -20.5       | 1.48 H             | 200                  | 33.8             | 19.7                     |
| 6                                                   | #17475.00   | 42.5 AV                 | 54.0           | -11.5       | 1.48 H             | 200                  | 22.8             | 19.7                     |
| 7                                                   | #23300.00   | -                       | -              | -           | -                  | -                    | -                | -                        |
| 8                                                   | #29125.00   | -                       | -              | -           | -                  | -                    | -                | -                        |
| 9                                                   | #34950.00   | -                       | -              | -           | -                  | -                    | -                | -                        |

#### REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

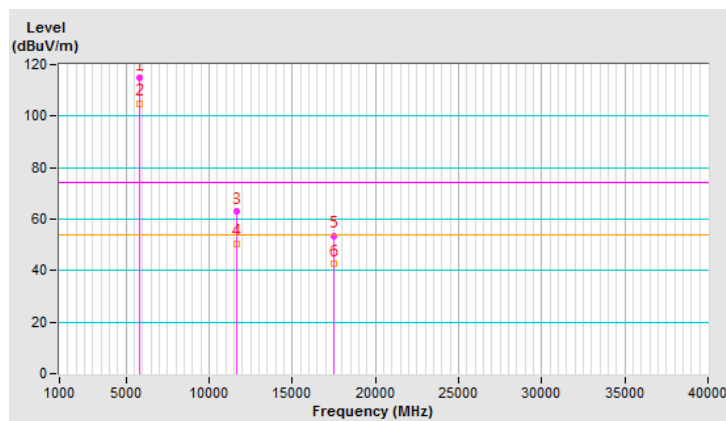


|         |                 |         |                                                |
|---------|-----------------|---------|------------------------------------------------|
| 操作模式：   | 發射              | 調變技術：   | OFDM                                           |
| 基本波頻率：  | CH 165：5825 MHz | 測試儀器：   | (PK) RB=1MHz, VB=3MHz<br>(AV) RB=1MHz, VB=10Hz |
| 量測場地溫度： | 22°C            | 量測場地濕度： | 64%RH                                          |
| 測試日期：   | 106 年 10 月 27 日 | 測試者：    | 陳志毅                                            |

| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M |             |                         |                |             |                    |                      |                  |                          |
|---------------------------------------------------|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| NO.                                               | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
| 1                                                 | *5825.00    | 121.1 PK                |                |             | 1.54 V             | 125                  | 115.9            | 5.2                      |
| 2                                                 | *5825.00    | 112.0 AV                |                |             | 1.54 V             | 125                  | 106.8            | 5.2                      |
| 3                                                 | 11650.00    | 65.8 PK                 | 74.0           | -8.2        | 2.11 V             | 27                   | 51.7             | 14.1                     |
| 4                                                 | 11650.00    | 53.2 AV                 | 54.0           | -0.8        | 2.11 V             | 27                   | 39.1             | 14.1                     |
| 5                                                 | #17475.00   | 52.8 PK                 | 74.0           | -21.2       | 2.07 V             | 221                  | 33.1             | 19.7                     |
| 6                                                 | #17475.00   | 40.4 AV                 | 54.0           | -13.6       | 2.07 V             | 221                  | 20.7             | 19.7                     |
| 7                                                 | #23300.00   | -                       | -              | -           | -                  | -                    | -                | -                        |
| 8                                                 | #29125.00   | -                       | -              | -           | -                  | -                    | -                | -                        |
| 9                                                 | #34950.00   | -                       | -              | -           | -                  | -                    | -                | -                        |

#### REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

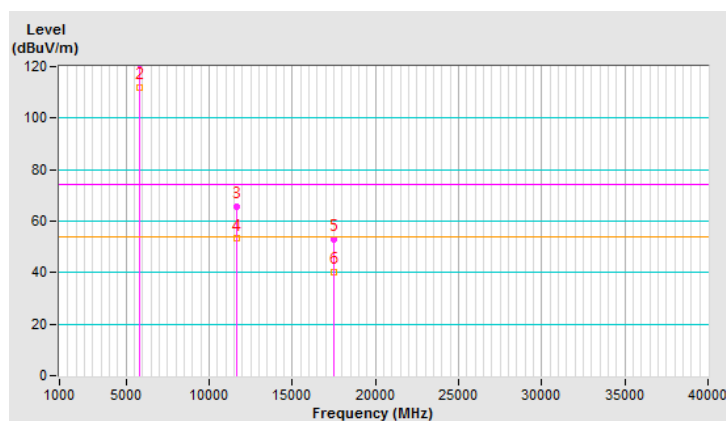

# 802.11ac (VHT40)


|         |                  |         |                                                |
|---------|------------------|---------|------------------------------------------------|
| 操作模式：   | 發射               | 調變技術：   | OFDM                                           |
| 基本波頻率：  | CH 38 : 5190 MHz | 測試儀器：   | (PK) RB=1MHz, VB=3MHz<br>(AV) RB=1MHz, VB=10Hz |
| 量測場地溫度： | 22°C             | 量測場地濕度： | 70%RH                                          |
| 測試日期：   | 105 年 10 月 7 日   | 測試者：    | 鄭樹營                                            |

## ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
|-----|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| 1   | 5150.00     | 57.5 PK                 | 74.0           | -16.5       | 2.77 H             | 46                   | 56.0             | 1.5                      |
| 2   | 5150.00     | 47.3 AV                 | 54.0           | -6.7        | 2.77 H             | 46                   | 45.8             | 1.5                      |
| 3   | *5190.00    | 108.4 PK                |                |             | 2.77 H             | 46                   | 106.7            | 1.7                      |
| 4   | *5190.00    | 97.0 AV                 |                |             | 2.77 H             | 46                   | 95.3             | 1.7                      |
| 5   | #10380.00   | 50.0 PK                 | 74.0           | -24.0       | 1.65 H             | 184                  | 38.5             | 11.5                     |
| 6   | #10380.00   | 38.9 AV                 | 54.0           | -15.1       | 1.65 H             | 184                  | 27.4             | 11.5                     |
| 7   | 15570.00    | 49.6 PK                 | 74.0           | -24.4       | 2.26 H             | 300                  | 36.5             | 13.1                     |
| 8   | 15570.00    | 39.3 AV                 | 54.0           | -14.7       | 2.26 H             | 300                  | 26.2             | 13.1                     |
| 9   | 20760.00    | -                       | -              | -           | -                  | -                    | -                | -                        |
| 10  | #25950.00   | -                       | -              | -           | -                  | -                    | -                | -                        |
| 11  | #31140.00   | -                       | -              | -           | -                  | -                    | -                | -                        |
| 12  | #36330.00   | -                       | -              | -           | -                  | -                    | -                | -                        |

## REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

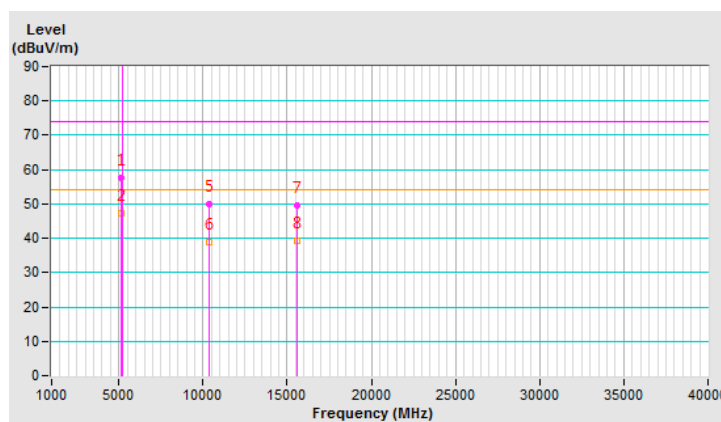


|         |                  |         |                                                |
|---------|------------------|---------|------------------------------------------------|
| 操作模式：   | 發射               | 調變技術：   | OFDM                                           |
| 基本波頻率：  | CH 38 : 5190 MHz | 測試儀器：   | (PK) RB=1MHz, VB=3MHz<br>(AV) RB=1MHz, VB=10Hz |
| 量測場地溫度： | 22°C             | 量測場地濕度： | 70%RH                                          |
| 測試日期：   | 105 年 10 月 7 日   | 測試者：    | 鄭樹營                                            |

| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M |             |                         |                |             |                    |                      |                  |                          |
|---------------------------------------------------|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| NO.                                               | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
| 1                                                 | 5150.00     | 73.8 PK                 | 74.0           | -0.2        | 1.77 V             | 174                  | 72.3             | 1.5                      |
| 2                                                 | 5150.00     | 53.9 AV                 | 54.0           | -0.1        | 1.77 V             | 174                  | 52.4             | 1.5                      |
| 3                                                 | *5190.00    | 113.6 PK                |                |             | 1.77 V             | 174                  | 111.9            | 1.7                      |
| 4                                                 | *5190.00    | 102.1 AV                |                |             | 1.77 V             | 174                  | 100.4            | 1.7                      |
| 5                                                 | #10380.00   | 50.1 PK                 | 74.0           | -23.9       | 2.35 V             | 204                  | 38.6             | 11.5                     |
| 6                                                 | #10380.00   | 39.3 AV                 | 54.0           | -14.7       | 2.35 V             | 204                  | 27.8             | 11.5                     |
| 7                                                 | 15570.00    | 50.3 PK                 | 74.0           | -23.7       | 1.09 V             | 157                  | 37.2             | 13.1                     |
| 8                                                 | 15570.00    | 39.6 AV                 | 54.0           | -14.4       | 1.09 V             | 157                  | 26.5             | 13.1                     |
| 9                                                 | 20760.00    | -                       | -              | -           | -                  | -                    | -                | -                        |
| 10                                                | #25950.00   | -                       | -              | -           | -                  | -                    | -                | -                        |
| 11                                                | #31140.00   | -                       | -              | -           | -                  | -                    | -                | -                        |
| 12                                                | #36330.00   | -                       | -              | -           | -                  | -                    | -                | -                        |

#### REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

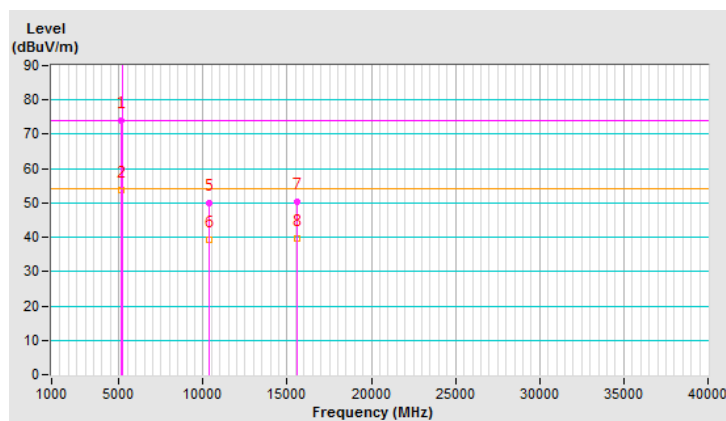


|         |                |         |                                                |
|---------|----------------|---------|------------------------------------------------|
| 操作模式：   | 發射             | 調變技術：   | OFDM                                           |
| 基本波頻率：  | CH 46：5230 MHz | 測試儀器：   | (PK) RB=1MHz, VB=3MHz<br>(AV) RB=1MHz, VB=10Hz |
| 量測場地溫度： | 22°C           | 量測場地濕度： | 70%RH                                          |
| 測試日期：   | 105 年 10 月 7 日 | 測試者：    | 鄭樹營                                            |

| ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M |             |                         |                |             |                    |                      |                  |                          |
|-----------------------------------------------------|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| NO.                                                 | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
| 1                                                   | 5000.00     | 54.3 PK                 | 74.0           | -19.7       | 2.80 H             | 49                   | 53.1             | 1.2                      |
| 2                                                   | 5000.00     | 44.5 AV                 | 54.0           | -9.5        | 2.80 H             | 49                   | 43.3             | 1.2                      |
| 3                                                   | 5147.00     | 56.7 PK                 | 74.0           | -17.3       | 2.80 H             | 49                   | 55.2             | 1.5                      |
| 4                                                   | 5147.00     | 46.8 AV                 | 54.0           | -7.2        | 2.80 H             | 49                   | 45.3             | 1.5                      |
| 5                                                   | *5230.00    | 112.5 PK                |                |             | 2.80 H             | 49                   | 110.9            | 1.6                      |
| 6                                                   | *5230.00    | 101.6 AV                |                |             | 2.80 H             | 49                   | 100.0            | 1.6                      |
| 7                                                   | 5396.00     | 52.6 PK                 | 74.0           | -21.4       | 2.80 H             | 49                   | 50.5             | 2.1                      |
| 8                                                   | 5396.00     | 42.4 AV                 | 54.0           | -11.6       | 2.80 H             | 49                   | 40.3             | 2.1                      |
| 9                                                   | #10460.00   | 49.1 PK                 | 74.0           | -24.9       | 1.65 H             | 200                  | 37.2             | 11.9                     |
| 10                                                  | #10460.00   | 38.2 AV                 | 54.0           | -15.8       | 1.65 H             | 200                  | 26.3             | 11.9                     |
| 11                                                  | 15690.00    | 50.5 PK                 | 74.0           | -23.5       | 2.24 H             | 299                  | 37.2             | 13.3                     |
| 12                                                  | 15690.00    | 39.8 AV                 | 54.0           | -14.2       | 2.24 H             | 299                  | 26.5             | 13.3                     |
| 13                                                  | 20920.00    | -                       | -              | -           | -                  | -                    | -                | -                        |
| 14                                                  | #26150.00   | -                       | -              | -           | -                  | -                    | -                | -                        |
| 15                                                  | 31380.00    | -                       | -              | -           | -                  | -                    | -                | -                        |
| 16                                                  | #36610.00   | -                       | -              | -           | -                  | -                    | -                | -                        |

#### REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

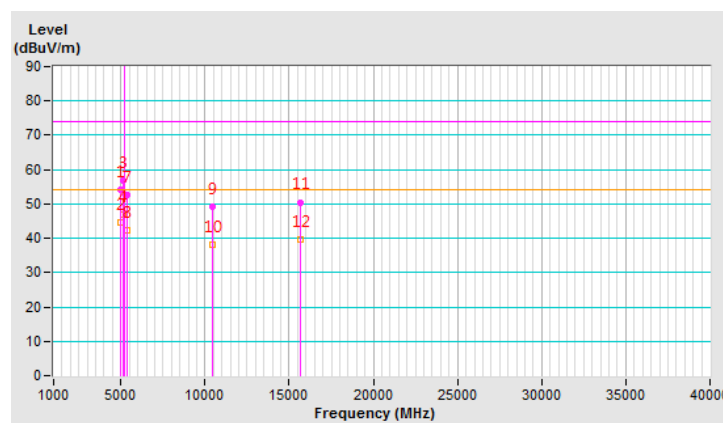


|         |                |         |                                                |
|---------|----------------|---------|------------------------------------------------|
| 操作模式：   | 發射             | 調變技術：   | OFDM                                           |
| 基本波頻率：  | CH 46：5230 MHz | 測試儀器：   | (PK) RB=1MHz, VB=3MHz<br>(AV) RB=1MHz, VB=10Hz |
| 量測場地溫度： | 22°C           | 量測場地濕度： | 70%RH                                          |
| 測試日期：   | 105 年 10 月 7 日 | 測試者：    | 鄭樹營                                            |

| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M |                |                               |                   |                |                          |                            |                        |                                |
|---------------------------------------------------|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| NO.                                               | FREQ.<br>(MHz) | EMISSION<br>LEVEL<br>(dBuV/m) | LIMIT<br>(dBuV/m) | MARGIN<br>(dB) | ANTENNA<br>HEIGHT<br>(m) | TABLE<br>ANGLE<br>(Degree) | RAW<br>VALUE<br>(dBuV) | CORRECTION<br>FACTOR<br>(dB/m) |
| 1                                                 | 5000.00        | 59.5 PK                       | 74.0              | -14.5          | 1.76 V                   | 191                        | 58.3                   | 1.2                            |
| 2                                                 | 5000.00        | 52.8 AV                       | 54.0              | -1.2           | 1.76 V                   | 191                        | 51.6                   | 1.2                            |
| 3                                                 | 5147.00        | 66.2 PK                       | 74.0              | -7.8           | 1.74 V                   | 174                        | 64.7                   | 1.5                            |
| 4                                                 | 5147.00        | 53.9 AV                       | 54.0              | -0.1           | 1.74 V                   | 174                        | 52.4                   | 1.5                            |
| 5                                                 | *5230.00       | 117.9 PK                      |                   |                | 1.75 V                   | 173                        | 116.3                  | 1.6                            |
| 6                                                 | *5230.00       | 106.8 AV                      |                   |                | 1.75 V                   | 173                        | 105.2                  | 1.6                            |
| 7                                                 | 5396.00        | 58.8 PK                       | 74.0              | -15.2          | 1.76 V                   | 191                        | 56.7                   | 2.1                            |
| 8                                                 | 5396.00        | 46.6 AV                       | 54.0              | -7.4           | 1.76 V                   | 191                        | 44.5                   | 2.1                            |
| 9                                                 | #10460.00      | 50.0 PK                       | 74.0              | -24.0          | 2.36 V                   | 198                        | 38.1                   | 11.9                           |
| 10                                                | #10460.00      | 38.9 AV                       | 54.0              | -15.1          | 2.36 V                   | 198                        | 27.0                   | 11.9                           |
| 11                                                | 15690.00       | 50.1 PK                       | 74.0              | -23.9          | 1.11 V                   | 160                        | 36.8                   | 13.3                           |
| 12                                                | 15690.00       | 39.5 AV                       | 54.0              | -14.5          | 1.11 V                   | 160                        | 26.2                   | 13.3                           |
| 13                                                | 20920.00       | -                             | -                 | -              | -                        | -                          | -                      | -                              |
| 14                                                | #26150.00      | -                             | -                 | -              | -                        | -                          | -                      | -                              |
| 15                                                | 31380.00       | -                             | -                 | -              | -                        | -                          | -                      | -                              |
| 16                                                | #36610.00      | -                             | -                 | -              | -                        | -                          | -                      | -                              |

#### REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

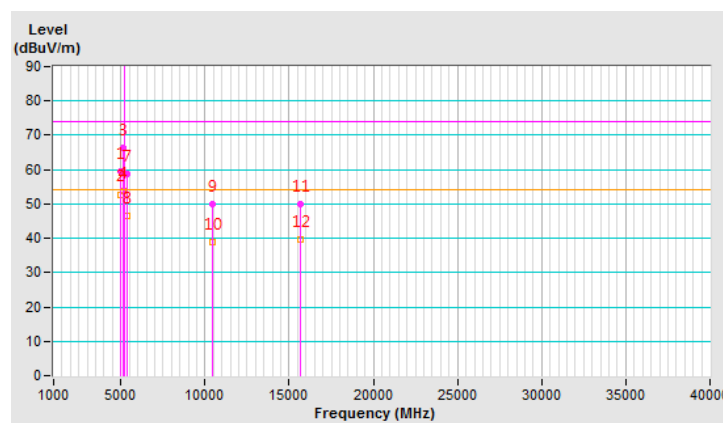


|         |                  |         |                                                |
|---------|------------------|---------|------------------------------------------------|
| 操作模式：   | 發射               | 調變技術：   | OFDM                                           |
| 基本波頻率：  | CH 54 : 5270 MHz | 測試儀器：   | (PK) RB=1MHz, VB=3MHz<br>(AV) RB=1MHz, VB=10Hz |
| 量測場地溫度： | 23°C             | 量測場地濕度： | 68%RH                                          |
| 測試日期：   | 105 年 11 月 10 日  | 測試者：    | 羅益偉                                            |

#### ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
|-----|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| 1   | 5150.00     | 51.4 PK                 | 74.0           | -22.6       | 2.89 H             | 143                  | 49.9             | 1.5                      |
| 2   | 5150.00     | 40.8 AV                 | 54.0           | -13.2       | 2.89 H             | 143                  | 39.3             | 1.5                      |
| 3   | *5270.00    | 106.4 PK                |                |             | 2.89 H             | 143                  | 104.6            | 1.8                      |
| 4   | *5270.00    | 95.8 AV                 |                |             | 2.89 H             | 143                  | 94.0             | 1.8                      |
| 5   | #10540.00   | 51.5 PK                 | 74.0           | -22.5       | 1.42 H             | 302                  | 39.2             | 12.3                     |
| 6   | #10540.00   | 38.5 AV                 | 54.0           | -15.5       | 1.42 H             | 302                  | 26.2             | 12.3                     |
| 7   | 15810.00    | 53.8 PK                 | 74.0           | -20.2       | 2.12 H             | 102                  | 40.8             | 13.0                     |
| 8   | 15810.00    | 39.8 AV                 | 54.0           | -14.2       | 2.12 H             | 102                  | 26.8             | 13.0                     |
| 9   | 21080.00    | -                       | -              | -           | -                  | -                    | -                | -                        |
| 10  | #26350.00   | -                       | -              | -           | -                  | -                    | -                | -                        |
| 11  | 31620.00    | -                       | -              | -           | -                  | -                    | -                | -                        |
| 12  | #36890.00   | -                       | -              | -           | -                  | -                    | -                | -                        |

#### REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

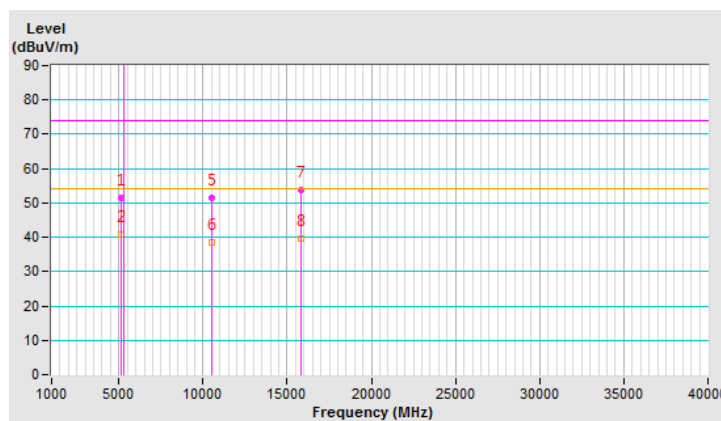


|         |                  |         |                                                |
|---------|------------------|---------|------------------------------------------------|
| 操作模式：   | 發射               | 調變技術：   | OFDM                                           |
| 基本波頻率：  | CH 54 : 5270 MHz | 測試儀器：   | (PK) RB=1MHz, VB=3MHz<br>(AV) RB=1MHz, VB=10Hz |
| 量測場地溫度： | 23°C             | 量測場地濕度： | 68%RH                                          |
| 測試日期：   | 105 年 11 月 10 日  | 測試者：    | 羅益偉                                            |

#### ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
|-----|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| 1   | 5150.00     | 56.6 PK                 | 74.0           | -17.4       | 1.88 V             | 169                  | 55.1             | 1.5                      |
| 2   | 5150.00     | 47.2 AV                 | 54.0           | -6.8        | 1.88 V             | 169                  | 45.7             | 1.5                      |
| 3   | *5270.00    | 113.8 PK                |                |             | 1.88 V             | 169                  | 112.0            | 1.8                      |
| 4   | *5270.00    | 102.7 AV                |                |             | 1.88 V             | 169                  | 100.9            | 1.8                      |
| 5   | #10540.00   | 50.6 PK                 | 74.0           | -23.4       | 2.29 V             | 249                  | 38.3             | 12.3                     |
| 6   | #10540.00   | 37.8 AV                 | 54.0           | -16.2       | 2.29 V             | 249                  | 25.5             | 12.3                     |
| 7   | 15810.00    | 53.4 PK                 | 74.0           | -20.6       | 1.00 V             | 172                  | 40.4             | 13.0                     |
| 8   | 15810.00    | 39.8 AV                 | 54.0           | -14.2       | 1.00 V             | 172                  | 26.8             | 13.0                     |
| 9   | 21080.00    | -                       | -              | -           | -                  | -                    | -                | -                        |
| 10  | #26350.00   | -                       | -              | -           | -                  | -                    | -                | -                        |
| 11  | 31620.00    | -                       | -              | -           | -                  | -                    | -                | -                        |
| 12  | #36890.00   | -                       | -              | -           | -                  | -                    | -                | -                        |

#### REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

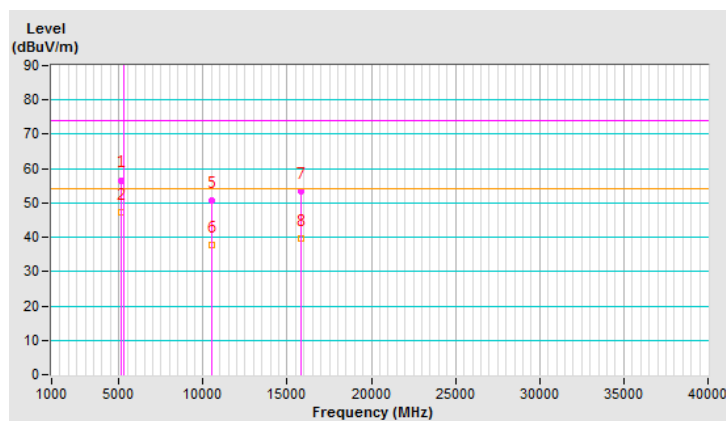


|         |                 |         |                                                |
|---------|-----------------|---------|------------------------------------------------|
| 操作模式：   | 發射              | 調變技術：   | OFDM                                           |
| 基本波頻率：  | CH 62：5310 MHz  | 測試儀器：   | (PK) RB=1MHz, VB=3MHz<br>(AV) RB=1MHz, VB=10Hz |
| 量測場地溫度： | 23℃             | 量測場地濕度： | 68%RH                                          |
| 測試日期：   | 105 年 11 月 10 日 | 測試者：    | 羅益偉                                            |

#### ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
|-----|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| 1   | *5310.00    | 105.9 PK                |                |             | 2.85 H             | 157                  | 104.1            | 1.8                      |
| 2   | *5310.00    | 95.1 AV                 |                |             | 2.85 H             | 157                  | 93.3             | 1.8                      |
| 3   | 5350.00     | 68.2 PK                 | 74.0           | -5.8        | 2.85 H             | 157                  | 66.3             | 1.9                      |
| 4   | 5350.00     | 47.7 AV                 | 54.0           | -6.3        | 2.85 H             | 157                  | 45.8             | 1.9                      |
| 5   | 10620.00    | 50.9 PK                 | 74.0           | -23.1       | 1.44 H             | 290                  | 38.4             | 12.5                     |
| 6   | 10620.00    | 38.1 AV                 | 54.0           | -15.9       | 1.44 H             | 290                  | 25.6             | 12.5                     |
| 7   | 15930.00    | 54.0 PK                 | 74.0           | -20.0       | 2.13 H             | 109                  | 41.0             | 13.0                     |
| 8   | 15930.00    | 40.4 AV                 | 54.0           | -13.6       | 2.13 H             | 109                  | 27.4             | 13.0                     |
| 9   | 21240.00    | -                       | -              | -           | -                  | -                    | -                | -                        |
| 10  | #26550.00   | -                       | -              | -           | -                  | -                    | -                | -                        |
| 11  | #31860.00   | -                       | -              | -           | -                  | -                    | -                | -                        |
| 12  | #37170.00   | -                       | -              | -           | -                  | -                    | -                | -                        |

#### REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

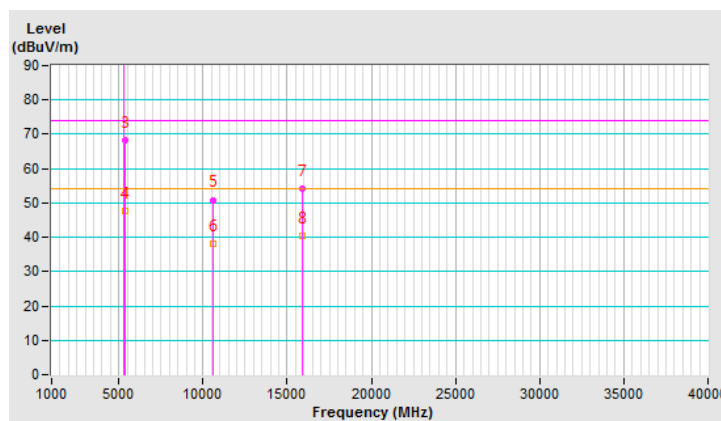


|         |                 |         |                                                |
|---------|-----------------|---------|------------------------------------------------|
| 操作模式：   | 發射              | 調變技術：   | OFDM                                           |
| 基本波頻率：  | CH 62：5310 MHz  | 測試儀器：   | (PK) RB=1MHz, VB=3MHz<br>(AV) RB=1MHz, VB=10Hz |
| 量測場地溫度： | 23℃             | 量測場地濕度： | 68%RH                                          |
| 測試日期：   | 105 年 11 月 10 日 | 測試者：    | 羅益偉                                            |

| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M |             |                         |                |             |                    |                      |                  |                          |
|---------------------------------------------------|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| NO.                                               | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
| 1                                                 | *5310.00    | 113.3 PK                |                |             | 1.94 V             | 176                  | 111.5            | 1.8                      |
| 2                                                 | *5310.00    | 102.2 AV                |                |             | 1.94 V             | 176                  | 100.4            | 1.8                      |
| 3                                                 | 5350.00     | 73.7 PK                 | 74.0           | -0.3        | 1.94 V             | 176                  | 71.8             | 1.9                      |
| 4                                                 | 5350.00     | 53.1 AV                 | 54.0           | -0.9        | 1.94 V             | 176                  | 51.2             | 1.9                      |
| 5                                                 | 10620.00    | 51.0 PK                 | 74.0           | -23.0       | 2.34 V             | 261                  | 38.5             | 12.5                     |
| 6                                                 | 10620.00    | 38.2 AV                 | 54.0           | -15.8       | 2.34 V             | 261                  | 25.7             | 12.5                     |
| 7                                                 | 15930.00    | 53.6 PK                 | 74.0           | -20.4       | 1.00 V             | 165                  | 40.6             | 13.0                     |
| 8                                                 | 15930.00    | 40.0 AV                 | 54.0           | -14.0       | 1.00 V             | 165                  | 27.0             | 13.0                     |
| 9                                                 | 21240.00    | -                       | -              | -           | -                  | -                    | -                | -                        |
| 10                                                | #26550.00   | -                       | -              | -           | -                  | -                    | -                | -                        |
| 11                                                | #31860.00   | -                       | -              | -           | -                  | -                    | -                | -                        |
| 12                                                | #37170.00   | -                       | -              | -           | -                  | -                    | -                | -                        |

#### REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

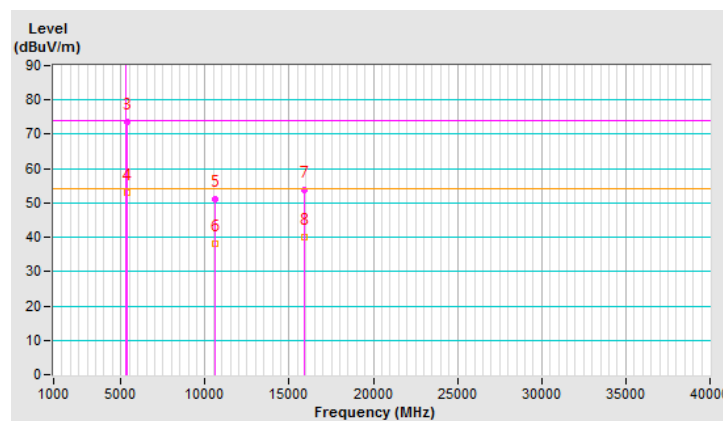


|         |                 |         |                                                |
|---------|-----------------|---------|------------------------------------------------|
| 操作模式：   | 發射              | 調變技術：   | OFDM                                           |
| 基本波頻率：  | CH 102：5510 MHz | 測試儀器：   | (PK) RB=1MHz, VB=3MHz<br>(AV) RB=1MHz, VB=10Hz |
| 量測場地溫度： | 23℃             | 量測場地濕度： | 68%RH                                          |
| 測試日期：   | 105 年 11 月 10 日 | 測試者：    | 羅益偉                                            |

#### ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
|-----|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| 1   | #5470.00    | 67.9 PK                 | 74.0           | -6.1        | 2.90 H             | 147                  | 65.8             | 2.1                      |
| 2   | #5470.00    | 47.2 AV                 | 54.0           | -6.8        | 2.90 H             | 147                  | 45.1             | 2.1                      |
| 3   | *5510.00    | 104.2 PK                |                |             | 2.90 H             | 147                  | 102.1            | 2.1                      |
| 4   | *5510.00    | 93.1 AV                 |                |             | 2.90 H             | 147                  | 91.0             | 2.1                      |
| 5   | 11020.00    | 51.1 PK                 | 74.0           | -22.9       | 1.50 H             | 287                  | 37.9             | 13.2                     |
| 6   | 11020.00    | 38.3 AV                 | 54.0           | -15.7       | 1.50 H             | 287                  | 25.1             | 13.2                     |
| 7   | #16530.00   | 53.2 PK                 | 74.0           | -20.8       | 2.20 H             | 111                  | 37.8             | 15.4                     |
| 8   | #16530.00   | 39.6 AV                 | 54.0           | -14.4       | 2.20 H             | 111                  | 24.2             | 15.4                     |
| 9   | 22040.00    | -                       | -              | -           | -                  | -                    | -                | -                        |
| 10  | #27550.00   | -                       | -              | -           | -                  | -                    | -                | -                        |
| 11  | #33060.00   | -                       | -              | -           | -                  | -                    | -                | -                        |
| 12  | #38570.00   | -                       | -              | -           | -                  | -                    | -                | -                        |

#### REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

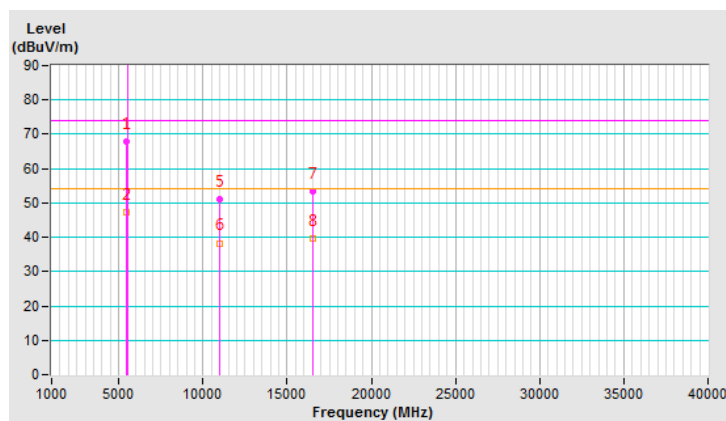


|         |                 |         |                                                |
|---------|-----------------|---------|------------------------------------------------|
| 操作模式：   | 發射              | 調變技術：   | OFDM                                           |
| 基本波頻率：  | CH 102：5510 MHz | 測試儀器：   | (PK) RB=1MHz, VB=3MHz<br>(AV) RB=1MHz, VB=10Hz |
| 量測場地溫度： | 23℃             | 量測場地濕度： | 68%RH                                          |
| 測試日期：   | 105 年 11 月 10 日 | 測試者：    | 羅益偉                                            |

#### ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
|-----|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| 1   | #5470.00    | 73.4 PK                 | 74.0           | -0.6        | 2.43 V             | 357                  | 71.3             | 2.1                      |
| 2   | #5470.00    | 52.1 AV                 | 54.0           | -1.9        | 2.43 V             | 357                  | 50.0             | 2.1                      |
| 3   | *5510.00    | 111.4 PK                |                |             | 2.43 V             | 357                  | 109.3            | 2.1                      |
| 4   | *5510.00    | 100.2 AV                |                |             | 2.43 V             | 357                  | 98.1             | 2.1                      |
| 5   | 11020.00    | 50.3 PK                 | 74.0           | -23.7       | 2.32 V             | 262                  | 37.1             | 13.2                     |
| 6   | 11020.00    | 37.7 AV                 | 54.0           | -16.3       | 2.32 V             | 262                  | 24.5             | 13.2                     |
| 7   | #16530.00   | 53.0 PK                 | 74.0           | -21.0       | 1.00 V             | 184                  | 37.6             | 15.4                     |
| 8   | #16530.00   | 39.5 AV                 | 54.0           | -14.5       | 1.00 V             | 184                  | 24.1             | 15.4                     |
| 9   | 22040.00    | -                       | -              | -           | -                  | -                    | -                | -                        |
| 10  | #27550.00   | -                       | -              | -           | -                  | -                    | -                | -                        |
| 11  | #33060.00   | -                       | -              | -           | -                  | -                    | -                | -                        |
| 12  | #38570.00   | -                       | -              | -           | -                  | -                    | -                | -                        |

#### REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

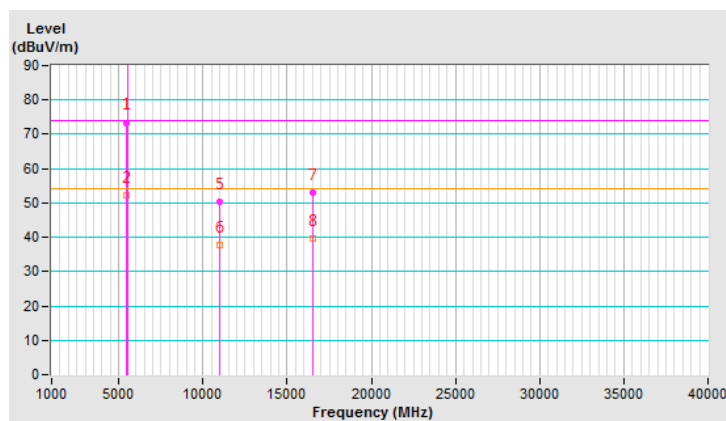


|         |                 |         |                                                |
|---------|-----------------|---------|------------------------------------------------|
| 操作模式：   | 發射              | 調變技術：   | OFDM                                           |
| 基本波頻率：  | CH 110：5550 MHz | 測試儀器：   | (PK) RB=1MHz, VB=3MHz<br>(AV) RB=1MHz, VB=10Hz |
| 量測場地溫度： | 23°C            | 量測場地濕度： | 68%RH                                          |
| 測試日期：   | 105 年 11 月 10 日 | 測試者：    | 羅益偉                                            |

| ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M |             |                         |                |             |                    |                      |                  |                          |
|-----------------------------------------------------|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| NO.                                                 | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
| 1                                                   | *5550.00    | 105.3 PK                |                |             | 2.92 H             | 140                  | 103.0            | 2.3                      |
| 2                                                   | *5550.00    | 94.2 AV                 |                |             | 2.92 H             | 140                  | 91.9             | 2.3                      |
| 3                                                   | 11100.00    | 50.9 PK                 | 74.0           | -23.1       | 1.43 H             | 314                  | 37.9             | 13.0                     |
| 4                                                   | 11100.00    | 38.1 AV                 | 54.0           | -15.9       | 1.43 H             | 314                  | 25.1             | 13.0                     |
| 5                                                   | #16650.00   | 53.6 PK                 | 74.0           | -20.4       | 2.18 H             | 89                   | 37.5             | 16.1                     |
| 6                                                   | #16650.00   | 39.6 AV                 | 54.0           | -14.4       | 2.18 H             | 89                   | 23.5             | 16.1                     |
| 7                                                   | 22200.00    | -                       | -              | -           | -                  | -                    | -                | -                        |
| 8                                                   | #27750.00   | -                       | -              | -           | -                  | -                    | -                | -                        |
| 9                                                   | #33300.00   | -                       | -              | -           | -                  | -                    | -                | -                        |
| 10                                                  | 38850.00    | -                       | -              | -           | -                  | -                    | -                | -                        |

#### REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

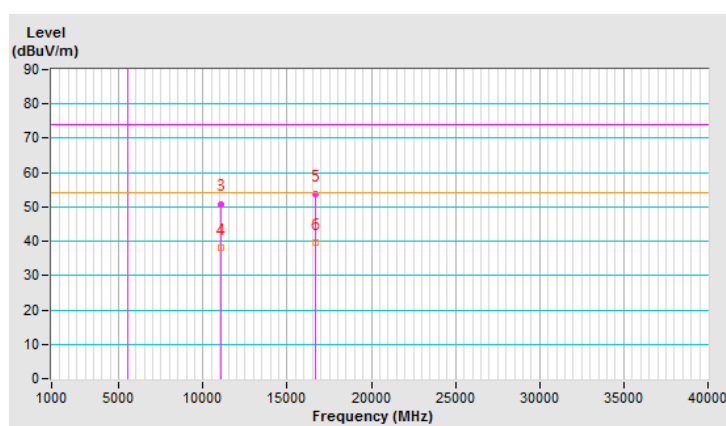


|         |                 |         |                                                |
|---------|-----------------|---------|------------------------------------------------|
| 操作模式：   | 發射              | 調變技術：   | OFDM                                           |
| 基本波頻率：  | CH 110：5550 MHz | 測試儀器：   | (PK) RB=1MHz, VB=3MHz<br>(AV) RB=1MHz, VB=10Hz |
| 量測場地溫度： | 23°C            | 量測場地濕度： | 68%RH                                          |
| 測試日期：   | 105 年 11 月 10 日 | 測試者：    | 羅益偉                                            |

| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M |             |                         |                |             |                    |                      |                  |                          |
|---------------------------------------------------|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| NO.                                               | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
| 1                                                 | *5550.00    | 112.5 PK                |                |             | 2.08 V             | 357                  | 110.2            | 2.3                      |
| 2                                                 | *5550.00    | 101.5 AV                |                |             | 2.08 V             | 357                  | 99.2             | 2.3                      |
| 3                                                 | 11100.00    | 50.6 PK                 | 74.0           | -23.4       | 2.33 V             | 238                  | 37.6             | 13.0                     |
| 4                                                 | 11100.00    | 38.0 AV                 | 54.0           | -16.0       | 2.33 V             | 238                  | 25.0             | 13.0                     |
| 5                                                 | #16650.00   | 53.4 PK                 | 74.0           | -20.6       | 1.00 V             | 168                  | 37.3             | 16.1                     |
| 6                                                 | #16650.00   | 39.9 AV                 | 54.0           | -14.1       | 1.00 V             | 168                  | 23.8             | 16.1                     |
| 7                                                 | 22200.00    | -                       | -              | -           | -                  | -                    | -                | -                        |
| 8                                                 | #27750.00   | -                       | -              | -           | -                  | -                    | -                | -                        |
| 9                                                 | #33300.00   | -                       | -              | -           | -                  | -                    | -                | -                        |
| 10                                                | 38850.00    | -                       | -              | -           | -                  | -                    | -                | -                        |

#### REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

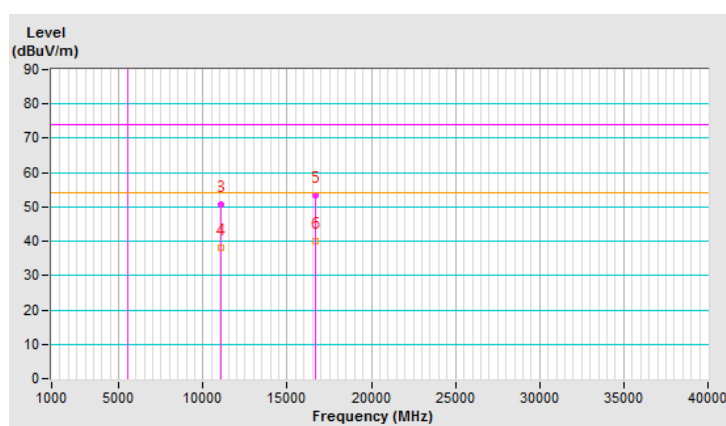


|         |                   |         |                                                |
|---------|-------------------|---------|------------------------------------------------|
| 操作模式：   | 發射                | 調變技術：   | OFDM                                           |
| 基本波頻率：  | CH 134 : 5670 MHz | 測試儀器：   | (PK) RB=1MHz, VB=3MHz<br>(AV) RB=1MHz, VB=10Hz |
| 量測場地溫度： | 23°C              | 量測場地濕度： | 68%RH                                          |
| 測試日期：   | 105 年 11 月 10 日   | 測試者：    | 羅益偉                                            |

#### ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
|-----|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| 1   | *5670.00    | 105.2 PK                |                |             | 2.84 H             | 159                  | 102.7            | 2.5                      |
| 2   | *5670.00    | 94.1 AV                 |                |             | 2.84 H             | 159                  | 91.6             | 2.5                      |
| 3   | #5725.00    | 64.2 PK                 | 74.0           | -9.8        | 2.84 H             | 159                  | 61.5             | 2.7                      |
| 4   | #5725.00    | 46.1 AV                 | 54.0           | -7.9        | 2.84 H             | 159                  | 43.4             | 2.7                      |
| 5   | 11340.00    | 50.3 PK                 | 74.0           | -23.7       | 1.49 H             | 302                  | 36.7             | 13.6                     |
| 6   | 11340.00    | 37.7 AV                 | 54.0           | -16.3       | 1.49 H             | 302                  | 24.1             | 13.6                     |
| 7   | #17010.00   | 53.7 PK                 | 74.0           | -20.3       | 2.19 H             | 106                  | 35.9             | 17.8                     |
| 8   | #17010.00   | 39.7 AV                 | 54.0           | -14.3       | 2.19 H             | 106                  | 21.9             | 17.8                     |
| 9   | 22680.00    | -                       | -              | -           | -                  | -                    | -                | -                        |
| 10  | #28350.00   | -                       | -              | -           | -                  | -                    | -                | -                        |
| 11  | #34020.00   | -                       | -              | -           | -                  | -                    | -                | -                        |
| 12  | 39690.00    | -                       | -              | -           | -                  | -                    | -                | -                        |

#### REMARKS:

- Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
- Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
- The other emission levels were very low against the limit.
- Margin value = Emission Level – Limit value
- " \* ": Fundamental frequency (主頻).
- " # ": The radiated frequency is out of the restricted band.
- " - ": The emission levels were too low to be detected.
- The blank is not available, the limit of fundamental frequency was restricted at the output power.

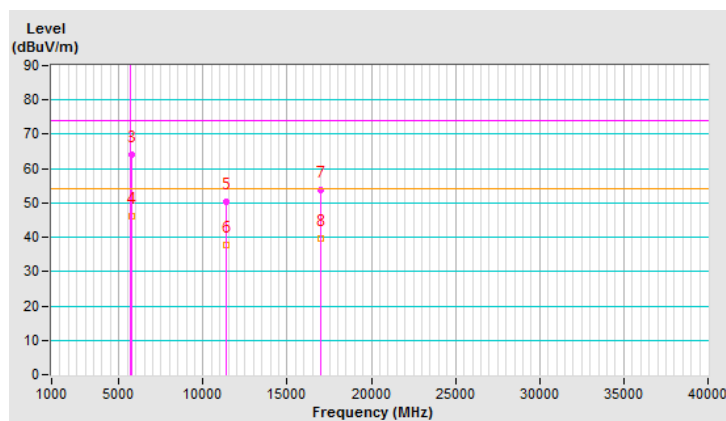


|         |                   |         |                                                |
|---------|-------------------|---------|------------------------------------------------|
| 操作模式：   | 發射                | 調變技術：   | OFDM                                           |
| 基本波頻率：  | CH 134 : 5670 MHz | 測試儀器：   | (PK) RB=1MHz, VB=3MHz<br>(AV) RB=1MHz, VB=10Hz |
| 量測場地溫度： | 23°C              | 量測場地濕度： | 68%RH                                          |
| 測試日期：   | 105 年 11 月 10 日   | 測試者：    | 羅益偉                                            |

| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M |             |                         |                |             |                    |                      |                  |                          |
|---------------------------------------------------|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| NO.                                               | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
| 1                                                 | *5670.00    | 112.2 PK                |                |             | 2.08 V             | 356                  | 109.7            | 2.5                      |
| 2                                                 | *5670.00    | 101.1 AV                |                |             | 2.08 V             | 356                  | 98.6             | 2.5                      |
| 3                                                 | #5725.00    | 69.5 PK                 | 74.0           | -4.5        | 2.08 V             | 356                  | 66.8             | 2.7                      |
| 4                                                 | #5725.00    | 51.1 AV                 | 54.0           | -2.9        | 2.08 V             | 356                  | 48.4             | 2.7                      |
| 5                                                 | 11340.00    | 50.1 PK                 | 74.0           | -23.9       | 2.24 V             | 236                  | 36.5             | 13.6                     |
| 6                                                 | 11340.00    | 37.3 AV                 | 54.0           | -16.7       | 2.24 V             | 236                  | 23.7             | 13.6                     |
| 7                                                 | #17010.00   | 53.6 PK                 | 74.0           | -20.4       | 1.00 V             | 172                  | 35.8             | 17.8                     |
| 8                                                 | #17010.00   | 40.2 AV                 | 54.0           | -13.8       | 1.00 V             | 172                  | 22.4             | 17.8                     |
| 9                                                 | 22680.00    | -                       | -              | -           | -                  | -                    | -                | -                        |
| 10                                                | #28350.00   | -                       | -              | -           | -                  | -                    | -                | -                        |
| 11                                                | #34020.00   | -                       | -              | -           | -                  | -                    | -                | -                        |
| 12                                                | 39690.00    | -                       | -              | -           | -                  | -                    | -                | -                        |

#### REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

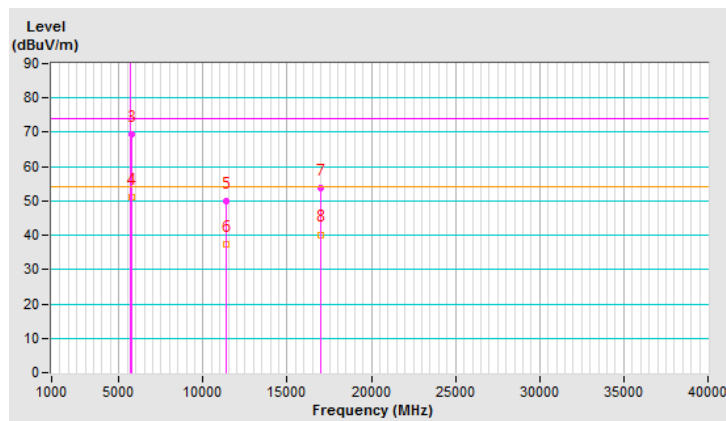


|         |                 |         |                                                |
|---------|-----------------|---------|------------------------------------------------|
| 操作模式：   | 發射              | 調變技術：   | OFDM                                           |
| 基本波頻率：  | CH 151：5755 MHz | 測試儀器：   | (PK) RB=1MHz, VB=3MHz<br>(AV) RB=1MHz, VB=10Hz |
| 量測場地溫度： | 22°C            | 量測場地濕度： | 70%RH                                          |
| 測試日期：   | 105 年 10 月 7 日  | 測試者：    | 鄭樹營                                            |

#### ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
|-----|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| 1   | *5755.00    | 114.1 PK                |                |             | 1.04 H             | 168                  | 111.4            | 2.7                      |
| 2   | *5755.00    | 102.2 AV                |                |             | 1.04 H             | 168                  | 99.5             | 2.7                      |
| 3   | 11510.00    | 50.7 PK                 | 74.0           | -23.3       | 1.44 H             | 0                    | 37.3             | 13.4                     |
| 4   | 11510.00    | 39.3 AV                 | 54.0           | -14.7       | 1.44 H             | 0                    | 25.9             | 13.4                     |
| 5   | #17265.00   | 54.6 PK                 | 74.0           | -19.4       | 2.19 H             | 283                  | 36.3             | 18.3                     |
| 6   | #17265.00   | 43.4 AV                 | 54.0           | -10.6       | 2.19 H             | 283                  | 25.1             | 18.3                     |
| 7   | 23020.00    | -                       | -              | -           | -                  | -                    | -                | -                        |
| 8   | #28775.00   | -                       | -              | -           | -                  | -                    | -                | -                        |
| 9   | #34530.00   | -                       | -              | -           | -                  | -                    | -                | -                        |

#### REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

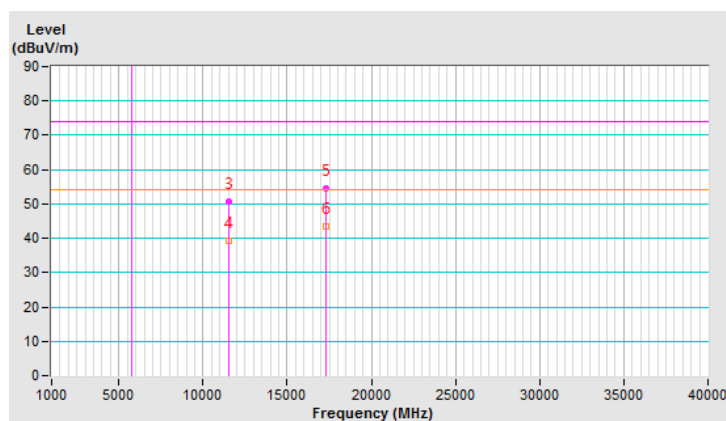


|         |                 |         |                                                |
|---------|-----------------|---------|------------------------------------------------|
| 操作模式：   | 發射              | 調變技術：   | OFDM                                           |
| 基本波頻率：  | CH 151：5755 MHz | 測試儀器：   | (PK) RB=1MHz, VB=3MHz<br>(AV) RB=1MHz, VB=10Hz |
| 量測場地溫度： | 22°C            | 量測場地濕度： | 70%RH                                          |
| 測試日期：   | 105 年 10 月 7 日  | 測試者：    | 鄭樹營                                            |

| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M |             |                         |                |             |                    |                      |                  |                          |
|---------------------------------------------------|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| NO.                                               | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
| 1                                                 | *5755.00    | 118.8 PK                |                |             | 1.95 V             | 5                    | 116.1            | 2.7                      |
| 2                                                 | *5755.00    | 107.9 AV                |                |             | 1.95 V             | 5                    | 105.2            | 2.7                      |
| 3                                                 | 11510.00    | 51.0 PK                 | 74.0           | -23.0       | 2.12 V             | 267                  | 37.6             | 13.4                     |
| 4                                                 | 11510.00    | 39.4 AV                 | 54.0           | -14.6       | 2.12 V             | 267                  | 26.0             | 13.4                     |
| 5                                                 | #17265.00   | 60.8 PK                 | 74.0           | -13.2       | 1.83 V             | 360                  | 42.5             | 18.3                     |
| 6                                                 | #17265.00   | 49.6 AV                 | 54.0           | -4.4        | 1.83 V             | 360                  | 31.3             | 18.3                     |
| 7                                                 | 23020.00    | -                       | -              | -           | -                  | -                    | -                | -                        |
| 8                                                 | #28775.00   | -                       | -              | -           | -                  | -                    | -                | -                        |
| 9                                                 | #34530.00   | -                       | -              | -           | -                  | -                    | -                | -                        |

#### REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

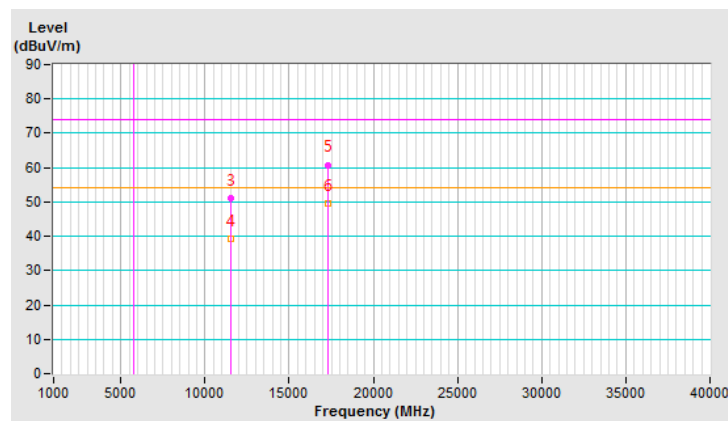


|         |                   |         |                                                |
|---------|-------------------|---------|------------------------------------------------|
| 操作模式：   | 發射                | 調變技術：   | OFDM                                           |
| 基本波頻率：  | CH 159 : 5795 MHz | 測試儀器：   | (PK) RB=1MHz, VB=3MHz<br>(AV) RB=1MHz, VB=10Hz |
| 量測場地溫度： | 22°C              | 量測場地濕度： | 70%RH                                          |
| 測試日期：   | 105 年 10 月 7 日    | 測試者：    | 鄭樹營                                            |

#### ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
|-----|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| 1   | *5795.00    | 114.8 PK                |                |             | 1.07 H             | 168                  | 112.1            | 2.7                      |
| 2   | *5795.00    | 103.8 AV                |                |             | 1.07 H             | 168                  | 101.1            | 2.7                      |
| 3   | 11590.00    | 50.2 PK                 | 74.0           | -23.8       | 1.40 H             | 8                    | 37.2             | 13.0                     |
| 4   | 11590.00    | 38.9 AV                 | 54.0           | -15.1       | 1.40 H             | 8                    | 25.9             | 13.0                     |
| 5   | #17385.00   | 54.4 PK                 | 74.0           | -19.6       | 2.21 H             | 288                  | 35.4             | 19.0                     |
| 6   | #17385.00   | 43.4 AV                 | 54.0           | -10.6       | 2.21 H             | 288                  | 24.4             | 19.0                     |
| 7   | #23180.00   | -                       | -              | -           | -                  | -                    | -                | -                        |
| 8   | #28975.00   | -                       | -              | -           | -                  | -                    | -                | -                        |
| 9   | #34770.00   | -                       | -              | -           | -                  | -                    | -                | -                        |

#### REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

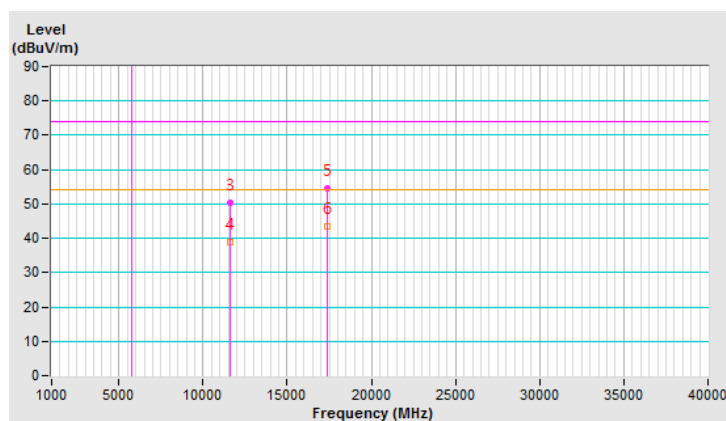


|         |                   |         |                                                |
|---------|-------------------|---------|------------------------------------------------|
| 操作模式：   | 發射                | 調變技術：   | OFDM                                           |
| 基本波頻率：  | CH 159 : 5795 MHz | 測試儀器：   | (PK) RB=1MHz, VB=3MHz<br>(AV) RB=1MHz, VB=10Hz |
| 量測場地溫度： | 22°C              | 量測場地濕度： | 70%RH                                          |
| 測試日期：   | 105 年 10 月 7 日    | 測試者：    | 鄭樹營                                            |

| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M |             |                         |                |             |                    |                      |                  |                          |
|---------------------------------------------------|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| NO.                                               | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
| 1                                                 | *5795.00    | 118.2 PK                |                |             | 1.96 V             | 5                    | 115.5            | 2.7                      |
| 2                                                 | *5795.00    | 108.4 AV                |                |             | 1.96 V             | 5                    | 105.7            | 2.7                      |
| 3                                                 | 11590.00    | 51.2 PK                 | 74.0           | -22.8       | 2.20 V             | 266                  | 38.2             | 13.0                     |
| 4                                                 | 11590.00    | 39.8 AV                 | 54.0           | -14.2       | 2.20 V             | 266                  | 26.8             | 13.0                     |
| 5                                                 | #17385.00   | 60.7 PK                 | 74.0           | -13.3       | 1.89 V             | 360                  | 41.7             | 19.0                     |
| 6                                                 | #17385.00   | 49.1 AV                 | 54.0           | -4.9        | 1.89 V             | 360                  | 30.1             | 19.0                     |
| 7                                                 | #23180.00   | -                       | -              | -           | -                  | -                    | -                | -                        |
| 8                                                 | #28975.00   | -                       | -              | -           | -                  | -                    | -                | -                        |
| 9                                                 | #34770.00   | -                       | -              | -           | -                  | -                    | -                | -                        |

#### REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

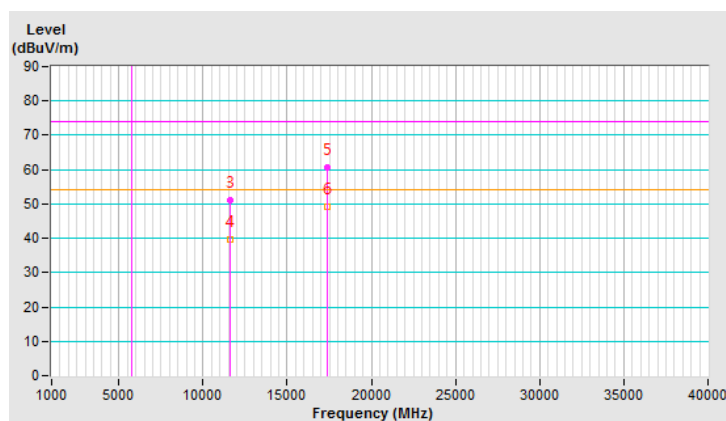

## 802.11ac (VHT80)


|         |                 |         |                                                |
|---------|-----------------|---------|------------------------------------------------|
| 操作模式：   | 發射              | 調變技術：   | OFDM                                           |
| 基本波頻率：  | CH 42：5210 MHz  | 測試儀器：   | (PK) RB=1MHz, VB=3MHz<br>(AV) RB=1MHz, VB=3kHz |
| 量測場地溫度： | 22°C            | 量測場地濕度： | 64%RH                                          |
| 測試日期：   | 106 年 10 月 27 日 | 測試者：    | 陳志毅                                            |

## ANTENNA POLARITY &amp; TEST DISTANCE: HORIZONTAL AT 3 M

| NO. | FREQ.<br>(MHz) | EMISSION<br>LEVEL<br>(dBuV/m) | LIMIT<br>(dBuV/m) | MARGIN<br>(dB) | ANTENNA<br>HEIGHT<br>(m) | TABLE<br>ANGLE<br>(Degree) | RAW<br>VALUE<br>(dBuV) | CORRECTION<br>FACTOR<br>(dB/m) |
|-----|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| 1   | 5143.50        | 66.1 PK                       | 74.0              | -7.9           | 1.10 H                   | 165                        | 62.1                   | 4.0                            |
| 2   | 5143.50        | 51.2 AV                       | 54.0              | -2.8           | 1.10 H                   | 165                        | 47.2                   | 4.0                            |
| 3   | *5210.00       | 101.1 PK                      |                   |                | 1.10 H                   | 165                        | 97.0                   | 4.1                            |
| 4   | *5210.00       | 88.8 AV                       |                   |                | 1.10 H                   | 165                        | 84.7                   | 4.1                            |
| 5   | 5360.50        | 55.8 PK                       | 74.0              | -18.2          | 1.10 H                   | 165                        | 51.4                   | 4.4                            |
| 6   | 5360.50        | 46.7 AV                       | 54.0              | -7.3           | 1.10 H                   | 165                        | 42.3                   | 4.4                            |
| 7   | #10420.00      | 63.4 PK                       | 74.0              | -10.6          | 1.21 H                   | 343                        | 49.8                   | 13.6                           |
| 8   | #10420.00      | 50.9 AV                       | 54.0              | -3.1           | 1.21 H                   | 343                        | 37.3                   | 13.6                           |
| 9   | 15630.00       | 53.6 PK                       | 74.0              | -20.4          | 1.42 H                   | 194                        | 40.0                   | 13.6                           |
| 10  | 15630.00       | 42.4 AV                       | 54.0              | -11.6          | 1.42 H                   | 194                        | 28.8                   | 13.6                           |
| 11  | 20840.00       | -                             | -                 | -              | -                        | -                          | -                      | -                              |
| 12  | #26050.00      | -                             | -                 | -              | -                        | -                          | -                      | -                              |
| 13  | 31260.00       | -                             | -                 | -              | -                        | -                          | -                      | -                              |
| 14  | 36470.00       | -                             | -                 | -              | -                        | -                          | -                      | -                              |

## REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

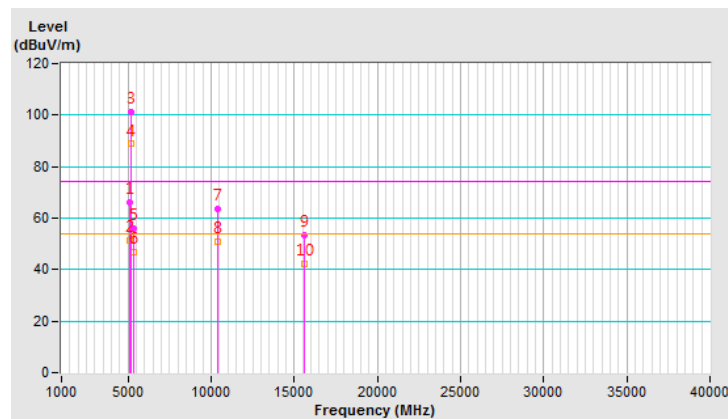


|         |                 |         |                                                |
|---------|-----------------|---------|------------------------------------------------|
| 操作模式：   | 發射              | 調變技術：   | OFDM                                           |
| 基本波頻率：  | CH 42：5210 MHz  | 測試儀器：   | (PK) RB=1MHz, VB=3MHz<br>(AV) RB=1MHz, VB=3kHz |
| 量測場地溫度： | 22°C            | 量測場地濕度： | 64%RH                                          |
| 測試日期：   | 106 年 10 月 27 日 | 測試者：    | 陳志毅                                            |

| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M |             |                         |                |             |                    |                      |                  |                          |
|---------------------------------------------------|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| NO.                                               | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
| 1                                                 | 5143.50     | 69.1 PK                 | 74.0           | -4.9        | 1.78 V             | 141                  | 65.1             | 4.0                      |
| 2                                                 | 5143.50     | 53.9 AV                 | 54.0           | -0.1        | 1.78 V             | 141                  | 49.9             | 4.0                      |
| 3                                                 | *5210.00    | 106.6 PK                |                |             | 1.78 V             | 141                  | 102.5            | 4.1                      |
| 4                                                 | *5210.00    | 95.3 AV                 |                |             | 1.78 V             | 141                  | 91.2             | 4.1                      |
| 5                                                 | 5360.50     | 55.1 PK                 | 74.0           | -18.9       | 1.78 V             | 141                  | 50.7             | 4.4                      |
| 6                                                 | 5360.50     | 44.6 AV                 | 54.0           | -9.4        | 1.78 V             | 141                  | 40.2             | 4.4                      |
| 7                                                 | #10420.00   | 65.6 PK                 | 74.0           | -8.4        | 2.14 V             | 23                   | 52.0             | 13.6                     |
| 8                                                 | #10420.00   | 52.9 AV                 | 54.0           | -1.1        | 2.14 V             | 23                   | 39.3             | 13.6                     |
| 9                                                 | 15630.00    | 53.1 PK                 | 74.0           | -20.9       | 2.03 V             | 209                  | 39.5             | 13.6                     |
| 10                                                | 15630.00    | 40.6 AV                 | 54.0           | -13.4       | 2.03 V             | 209                  | 27.0             | 13.6                     |
| 11                                                | 20840.00    | -                       | -              | -           | -                  | -                    | -                | -                        |
| 12                                                | #26050.00   | -                       | -              | -           | -                  | -                    | -                | -                        |
| 13                                                | 31260.00    | -                       | -              | -           | -                  | -                    | -                | -                        |
| 14                                                | 36470.00    | -                       | -              | -           | -                  | -                    | -                | -                        |

#### REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

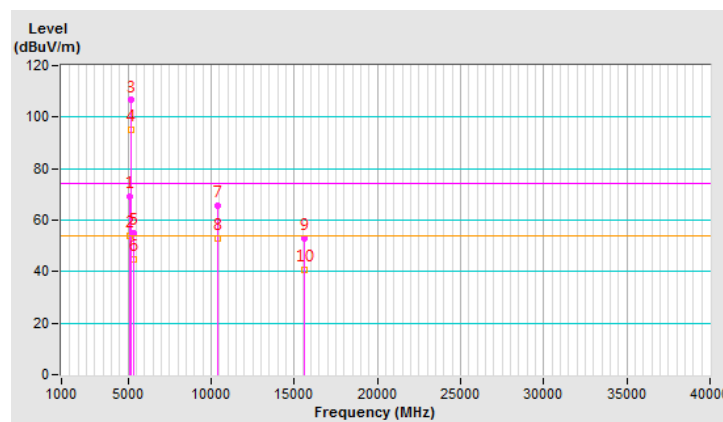


|         |                 |         |                                                |
|---------|-----------------|---------|------------------------------------------------|
| 操作模式：   | 發射              | 調變技術：   | OFDM                                           |
| 基本波頻率：  | CH 58：5290 MHz  | 測試儀器：   | (PK) RB=1MHz, VB=3MHz<br>(AV) RB=1MHz, VB=3kHz |
| 量測場地溫度： | 22°C            | 量測場地濕度： | 64%RH                                          |
| 測試日期：   | 106 年 10 月 27 日 | 測試者：    | 陳志毅                                            |

| ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M |             |                         |                |             |                    |                      |                  |                          |
|-----------------------------------------------------|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| NO.                                                 | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
| 1                                                   | 5143.60     | 49.0 PK                 | 74.0           | -25.0       | 1.10 H             | 177                  | 45.0             | 4.0                      |
| 2                                                   | 5143.60     | 38.7 AV                 | 54.0           | -15.3       | 1.10 H             | 177                  | 34.7             | 4.0                      |
| 3                                                   | *5290.00    | 103.0 PK                |                |             | 1.10 H             | 177                  | 98.7             | 4.3                      |
| 4                                                   | *5290.00    | 89.5 AV                 |                |             | 1.10 H             | 177                  | 85.2             | 4.3                      |
| 5                                                   | 5351.00     | 70.8 PK                 | 74.0           | -3.2        | 1.10 H             | 177                  | 66.4             | 4.4                      |
| 6                                                   | 5351.00     | 53.8 AV                 | 54.0           | -0.2        | 1.10 H             | 177                  | 49.4             | 4.4                      |
| 7                                                   | #10580.00   | 53.1 PK                 | 74.0           | -20.9       | 1.30 H             | 350                  | 39.2             | 13.9                     |
| 8                                                   | #10580.00   | 41.0 AV                 | 54.0           | -13.0       | 1.30 H             | 350                  | 27.1             | 13.9                     |
| 9                                                   | 15870.00    | 54.1 PK                 | 74.0           | -19.9       | 1.49 H             | 211                  | 40.7             | 13.4                     |
| 10                                                  | 15870.00    | 42.9 AV                 | 54.0           | -11.1       | 1.49 H             | 211                  | 29.5             | 13.4                     |
| 11                                                  | 21160.00    | -                       | -              | -           | -                  | -                    | -                | -                        |
| 12                                                  | #26450.00   | -                       | -              | -           | -                  | -                    | -                | -                        |
| 13                                                  | 31740.00    | -                       | -              | -           | -                  | -                    | -                | -                        |
| 14                                                  | #37030.00   | -                       | -              | -           | -                  | -                    | -                | -                        |

#### REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

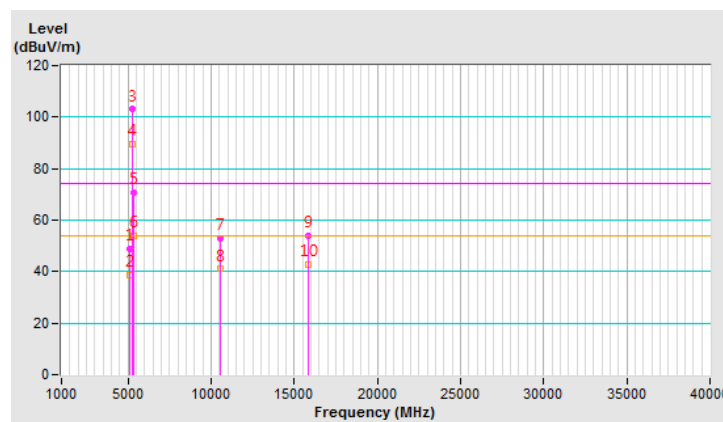


|         |                 |         |                                                |
|---------|-----------------|---------|------------------------------------------------|
| 操作模式：   | 發射              | 調變技術：   | OFDM                                           |
| 基本波頻率：  | CH 58：5290 MHz  | 測試儀器：   | (PK) RB=1MHz, VB=3MHz<br>(AV) RB=1MHz, VB=3kHz |
| 量測場地溫度： | 22°C            | 量測場地濕度： | 64%RH                                          |
| 測試日期：   | 106 年 10 月 27 日 | 測試者：    | 陳志毅                                            |

| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M |             |                         |                |             |                    |                      |                  |                          |
|---------------------------------------------------|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| NO.                                               | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
| 1                                                 | 5143.60     | 52.0 PK                 | 74.0           | -22.0       | 1.81 V             | 137                  | 48.0             | 4.0                      |
| 2                                                 | 5143.60     | 41.4 AV                 | 54.0           | -12.6       | 1.81 V             | 137                  | 37.4             | 4.0                      |
| 3                                                 | *5290.00    | 108.5 PK                |                |             | 1.81 V             | 137                  | 104.2            | 4.3                      |
| 4                                                 | *5290.00    | 96.0 AV                 |                |             | 1.81 V             | 137                  | 91.7             | 4.3                      |
| 5                                                 | 5351.00     | 70.9 PK                 | 74.0           | -3.1        | 1.81 V             | 137                  | 66.5             | 4.4                      |
| 6                                                 | 5351.00     | 53.9 AV                 | 54.0           | -0.1        | 1.81 V             | 137                  | 49.5             | 4.4                      |
| 7                                                 | #10580.00   | 56.2 PK                 | 74.0           | -17.8       | 2.15 V             | 42                   | 42.3             | 13.9                     |
| 8                                                 | #10580.00   | 43.7 AV                 | 54.0           | -10.3       | 2.15 V             | 42                   | 29.8             | 13.9                     |
| 9                                                 | 15870.00    | 52.8 PK                 | 74.0           | -21.2       | 2.01 V             | 230                  | 39.4             | 13.4                     |
| 10                                                | 15870.00    | 40.6 AV                 | 54.0           | -13.4       | 2.01 V             | 230                  | 27.2             | 13.4                     |
| 11                                                | 21160.00    | -                       | -              | -           | -                  | -                    | -                | -                        |
| 12                                                | #26450.00   | -                       | -              | -           | -                  | -                    | -                | -                        |
| 13                                                | 31740.00    | -                       | -              | -           | -                  | -                    | -                | -                        |
| 14                                                | #37030.00   | -                       | -              | -           | -                  | -                    | -                | -                        |

#### REMARKS:

- Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
- Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
- The other emission levels were very low against the limit.
- Margin value = Emission Level – Limit value
- " \* ": Fundamental frequency (主頻).
- " # ": The radiated frequency is out of the restricted band.
- " - ": The emission levels were too low to be detected.
- The blank is not available, the limit of fundamental frequency was restricted at the output power.

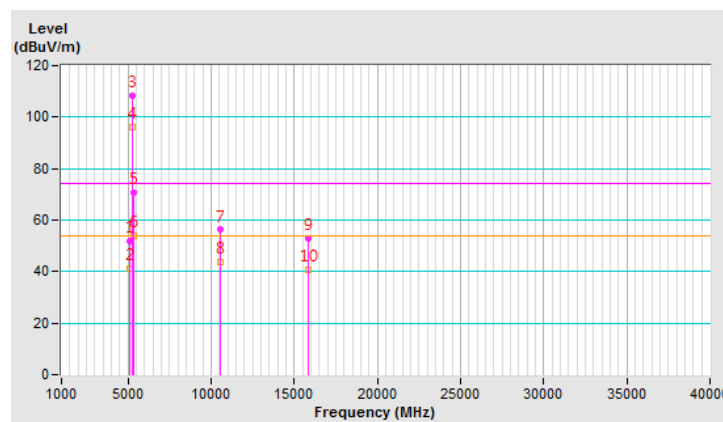


|         |                 |         |                                                |
|---------|-----------------|---------|------------------------------------------------|
| 操作模式：   | 發射              | 調變技術：   | OFDM                                           |
| 基本波頻率：  | CH 106：5530 MHz | 測試儀器：   | (PK) RB=1MHz, VB=3MHz<br>(AV) RB=1MHz, VB=3kHz |
| 量測場地溫度： | 22°C            | 量測場地濕度： | 64%RH                                          |
| 測試日期：   | 106 年 10 月 27 日 | 測試者：    | 陳志毅                                            |

| ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M |             |                         |                |             |                    |                      |                  |                          |
|-----------------------------------------------------|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| NO.                                                 | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
| 1                                                   | #5463.00    | 65.8 PK                 | 74.0           | -8.2        | 1.13 H             | 177                  | 61.3             | 4.5                      |
| 2                                                   | #5463.00    | 51.1 AV                 | 54.0           | -2.9        | 1.13 H             | 177                  | 46.6             | 4.5                      |
| 3                                                   | *5530.00    | 104.5 PK                |                |             | 1.13 H             | 177                  | 100.0            | 4.5                      |
| 4                                                   | *5530.00    | 92.2 AV                 |                |             | 1.13 H             | 177                  | 87.7             | 4.5                      |
| 5                                                   | #5726.00    | 56.2 PK                 | 74.0           | -17.8       | 1.13 H             | 177                  | 51.3             | 4.9                      |
| 6                                                   | #5726.00    | 47.3 AV                 | 54.0           | -6.7        | 1.13 H             | 177                  | 42.4             | 4.9                      |
| 7                                                   | 11060.00    | 53.5 PK                 | 74.0           | -20.5       | 1.26 H             | 358                  | 39.0             | 14.5                     |
| 8                                                   | 11060.00    | 41.0 AV                 | 54.0           | -13.0       | 1.26 H             | 358                  | 26.5             | 14.5                     |
| 9                                                   | #16590.00   | 53.4 PK                 | 74.0           | -20.6       | 1.44 H             | 205                  | 36.8             | 16.6                     |
| 10                                                  | #16590.00   | 42.3 AV                 | 54.0           | -11.7       | 1.44 H             | 205                  | 25.7             | 16.6                     |
| 11                                                  | 22120.00    | -                       | -              | -           | -                  | -                    | -                | -                        |
| 12                                                  | #27650.00   | -                       | -              | -           | -                  | -                    | -                | -                        |
| 13                                                  | #33180.00   | -                       | -              | -           | -                  | -                    | -                | -                        |
| 14                                                  | 38710.00    | -                       | -              | -           | -                  | -                    | -                | -                        |

#### REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

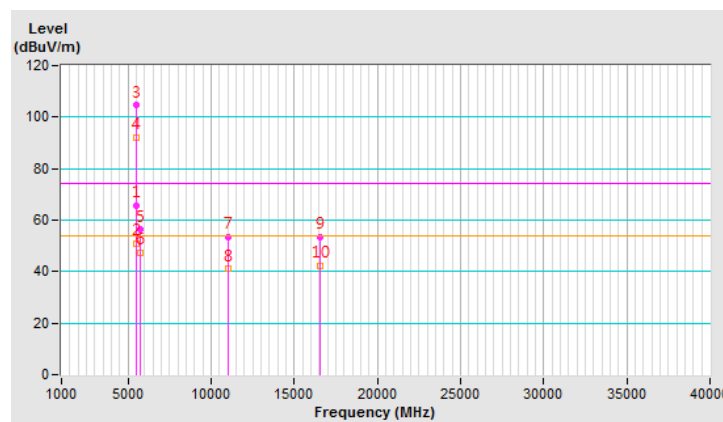


|         |                 |         |                                                |
|---------|-----------------|---------|------------------------------------------------|
| 操作模式：   | 發射              | 調變技術：   | OFDM                                           |
| 基本波頻率：  | CH 106：5530 MHz | 測試儀器：   | (PK) RB=1MHz, VB=3MHz<br>(AV) RB=1MHz, VB=3kHz |
| 量測場地溫度： | 22°C            | 量測場地濕度： | 64%RH                                          |
| 測試日期：   | 106 年 10 月 27 日 | 測試者：    | 陳志毅                                            |

| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M |             |                         |                |             |                    |                      |                  |                          |
|---------------------------------------------------|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| NO.                                               | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
| 1                                                 | #5463.00    | 68.8 PK                 | 74.0           | -5.2        | 3.40 V             | 152                  | 64.3             | 4.5                      |
| 2                                                 | #5463.00    | 53.8 AV                 | 54.0           | -0.2        | 3.40 V             | 152                  | 49.3             | 4.5                      |
| 3                                                 | *5530.00    | 110.0 PK                |                |             | 3.40 V             | 152                  | 105.5            | 4.5                      |
| 4                                                 | *5530.00    | 98.7 AV                 |                |             | 3.40 V             | 152                  | 94.2             | 4.5                      |
| 5                                                 | #5726.00    | 55.5 PK                 | 74.0           | -18.5       | 3.40 V             | 152                  | 50.6             | 4.9                      |
| 6                                                 | #5726.00    | 45.2 AV                 | 54.0           | -8.8        | 3.40 V             | 152                  | 40.3             | 4.9                      |
| 7                                                 | 11060.00    | 55.6 PK                 | 74.0           | -18.4       | 2.10 V             | 13                   | 41.1             | 14.5                     |
| 8                                                 | 11060.00    | 42.9 AV                 | 54.0           | -11.1       | 2.10 V             | 13                   | 28.4             | 14.5                     |
| 9                                                 | #16590.00   | 52.8 PK                 | 74.0           | -21.2       | 2.05 V             | 225                  | 36.2             | 16.6                     |
| 10                                                | #16590.00   | 40.6 AV                 | 54.0           | -13.4       | 2.05 V             | 225                  | 24.0             | 16.6                     |
| 11                                                | 22120.00    | -                       | -              | -           | -                  | -                    | -                | -                        |
| 12                                                | #27650.00   | -                       | -              | -           | -                  | -                    | -                | -                        |
| 13                                                | #33180.00   | -                       | -              | -           | -                  | -                    | -                | -                        |
| 14                                                | 38710.00    | -                       | -              | -           | -                  | -                    | -                | -                        |

#### REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

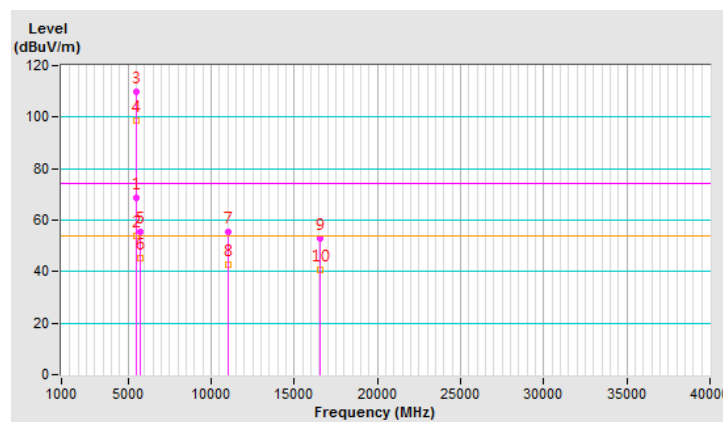


|         |                 |         |                                                |
|---------|-----------------|---------|------------------------------------------------|
| 操作模式：   | 發射              | 調變技術：   | OFDM                                           |
| 基本波頻率：  | CH 122：5610 MHz | 測試儀器：   | (PK) RB=1MHz, VB=3MHz<br>(AV) RB=1MHz, VB=3kHz |
| 量測場地溫度： | 22°C            | 量測場地濕度： | 64%RH                                          |
| 測試日期：   | 106 年 10 月 27 日 | 測試者：    | 陳志毅                                            |

#### ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
|-----|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| 1   | #5467.00    | 57.6 PK                 | 74.0           | -16.4       | 1.16 H             | 173                  | 53.1             | 4.5                      |
| 2   | #5467.00    | 48.1 AV                 | 54.0           | -5.9        | 1.16 H             | 173                  | 43.6             | 4.5                      |
| 3   | *5610.00    | 103.6 PK                |                |             | 1.16 H             | 173                  | 98.9             | 4.7                      |
| 4   | *5610.00    | 94.3 AV                 |                |             | 1.16 H             | 173                  | 89.6             | 4.7                      |
| 5   | #5725.00    | 56.7 PK                 | 74.0           | -17.3       | 1.16 H             | 173                  | 51.8             | 4.9                      |
| 6   | #5725.00    | 47.0 AV                 | 54.0           | -7.0        | 1.16 H             | 173                  | 42.1             | 4.9                      |
| 7   | 11220.00    | 52.5 PK                 | 74.0           | -21.5       | 1.27 H             | 359                  | 38.1             | 14.4                     |
| 8   | 11220.00    | 40.1 AV                 | 54.0           | -13.9       | 1.27 H             | 359                  | 25.7             | 14.4                     |
| 9   | #16830.00   | 54.1 PK                 | 74.0           | -19.9       | 1.53 H             | 198                  | 37.1             | 17.0                     |
| 10  | #16830.00   | 43.0 AV                 | 54.0           | -11.0       | 1.53 H             | 198                  | 26.0             | 17.0                     |
| 11  | 22440.00    | -                       | -              | -           | -                  | -                    | -                | -                        |
| 12  | #28050.00   | -                       | -              | -           | -                  | -                    | -                | -                        |
| 13  | #33660.00   | -                       | -              | -           | -                  | -                    | -                | -                        |
| 14  | 39270.00    | -                       | -              | -           | -                  | -                    | -                | -                        |

#### REMARKS:

- Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
- Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
- The other emission levels were very low against the limit.
- Margin value = Emission Level – Limit value
- " \* ": Fundamental frequency (主頻).
- " # ": The radiated frequency is out of the restricted band.
- " - ": The emission levels were too low to be detected.
- The blank is not available, the limit of fundamental frequency was restricted at the output power.

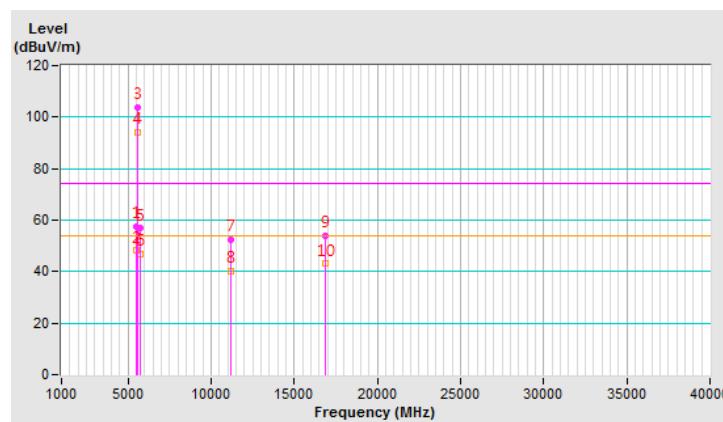


|         |                 |         |                                                |
|---------|-----------------|---------|------------------------------------------------|
| 操作模式：   | 發射              | 調變技術：   | OFDM                                           |
| 基本波頻率：  | CH 122：5610 MHz | 測試儀器：   | (PK) RB=1MHz, VB=3MHz<br>(AV) RB=1MHz, VB=3kHz |
| 量測場地溫度： | 22°C            | 量測場地濕度： | 64%RH                                          |
| 測試日期：   | 106 年 10 月 27 日 | 測試者：    | 陳志毅                                            |

| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M |             |                         |                |             |                    |                      |                  |                          |
|---------------------------------------------------|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| NO.                                               | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
| 1                                                 | #5467.00    | 56.9 PK                 | 74.0           | -17.1       | 3.32 V             | 155                  | 52.4             | 4.5                      |
| 2                                                 | #5467.00    | 46.0 AV                 | 54.0           | -8.0        | 3.32 V             | 155                  | 41.5             | 4.5                      |
| 3                                                 | *5610.00    | 109.1 PK                |                |             | 3.32 V             | 155                  | 104.4            | 4.7                      |
| 4                                                 | *5610.00    | 100.8 AV                |                |             | 3.32 V             | 155                  | 96.1             | 4.7                      |
| 5                                                 | #5725.00    | 59.7 PK                 | 74.0           | -14.3       | 3.32 V             | 155                  | 54.8             | 4.9                      |
| 6                                                 | #5725.00    | 49.7 AV                 | 54.0           | -4.3        | 3.32 V             | 155                  | 44.8             | 4.9                      |
| 7                                                 | 11220.00    | 55.9 PK                 | 74.0           | -18.1       | 2.11 V             | 22                   | 41.5             | 14.4                     |
| 8                                                 | 11220.00    | 43.4 AV                 | 54.0           | -10.6       | 2.11 V             | 22                   | 29.0             | 14.4                     |
| 9                                                 | #16830.00   | 52.8 PK                 | 74.0           | -21.2       | 2.12 V             | 226                  | 35.8             | 17.0                     |
| 10                                                | #16830.00   | 40.5 AV                 | 54.0           | -13.5       | 2.12 V             | 226                  | 23.5             | 17.0                     |
| 11                                                | 22440.00    | -                       | -              | -           | -                  | -                    | -                | -                        |
| 12                                                | #28050.00   | -                       | -              | -           | -                  | -                    | -                | -                        |
| 13                                                | #33660.00   | -                       | -              | -           | -                  | -                    | -                | -                        |
| 14                                                | 39270.00    | -                       | -              | -           | -                  | -                    | -                | -                        |

#### REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

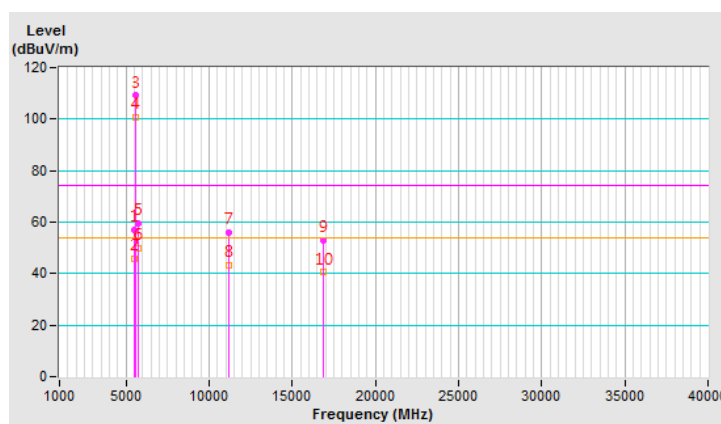


|         |                   |         |                                                |
|---------|-------------------|---------|------------------------------------------------|
| 操作模式：   | 發射                | 調變技術：   | OFDM                                           |
| 基本波頻率：  | CH 155 : 5775 MHz | 測試儀器：   | (PK) RB=1MHz, VB=3MHz<br>(AV) RB=1MHz, VB=3kHz |
| 量測場地溫度： | 22°C              | 量測場地濕度： | 64%RH                                          |
| 測試日期：   | 106 年 10 月 27 日   | 測試者：    | 陳志毅                                            |

| ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M |             |                         |                |             |                    |                      |                  |                          |
|-----------------------------------------------------|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| NO.                                                 | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
| 1                                                   | *5775.00    | 106.3 PK                |                |             | 1.06 H             | 176                  | 101.3            | 5.0                      |
| 2                                                   | *5775.00    | 96.8 AV                 |                |             | 1.06 H             | 176                  | 91.8             | 5.0                      |
| 3                                                   | 11550.00    | 53.0 PK                 | 74.0           | -21.0       | 1.24 H             | 352                  | 39.0             | 14.0                     |
| 4                                                   | 11550.00    | 40.4 AV                 | 54.0           | -13.6       | 1.24 H             | 352                  | 26.4             | 14.0                     |
| 5                                                   | #17325.00   | 53.8 PK                 | 74.0           | -20.2       | 1.46 H             | 205                  | 35.2             | 18.6                     |
| 6                                                   | #17325.00   | 42.8 AV                 | 54.0           | -11.2       | 1.46 H             | 205                  | 24.2             | 18.6                     |
| 7                                                   | 23100.00    | -                       | -              | -           | -                  | -                    | -                | -                        |
| 8                                                   | #28875.00   | -                       | -              | -           | -                  | -                    | -                | -                        |
| 9                                                   | #34650.00   | -                       | -              | -           | -                  | -                    | -                | -                        |

#### REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

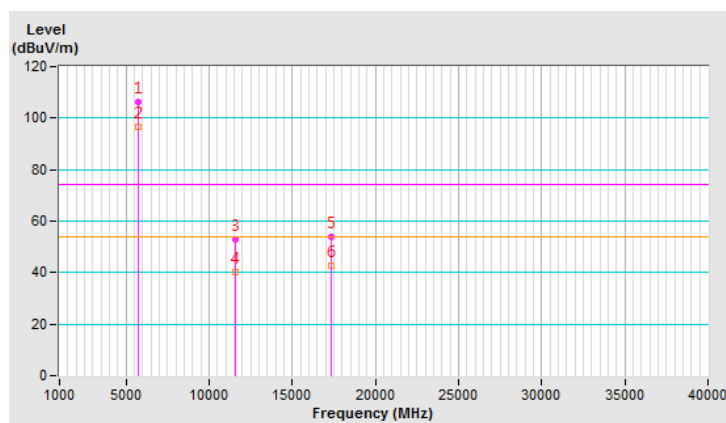


|         |                   |         |                                                |
|---------|-------------------|---------|------------------------------------------------|
| 操作模式：   | 發射                | 調變技術：   | OFDM                                           |
| 基本波頻率：  | CH 155 : 5775 MHz | 測試儀器：   | (PK) RB=1MHz, VB=3MHz<br>(AV) RB=1MHz, VB=3kHz |
| 量測場地溫度： | 22°C              | 量測場地濕度： | 64%RH                                          |
| 測試日期：   | 106 年 10 月 27 日   | 測試者：    | 陳志毅                                            |

| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M |             |                         |                |             |                    |                      |                  |                          |
|---------------------------------------------------|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| NO.                                               | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
| 1                                                 | *5775.00    | 111.8 PK                |                |             | 2.54 V             | 134                  | 106.8            | 5.0                      |
| 2                                                 | *5775.00    | 103.3 AV                |                |             | 2.54 V             | 134                  | 98.3             | 5.0                      |
| 3                                                 | 11550.00    | 56.0 PK                 | 74.0           | -18.0       | 2.12 V             | 31                   | 42.0             | 14.0                     |
| 4                                                 | 11550.00    | 43.3 AV                 | 54.0           | -10.7       | 2.12 V             | 31                   | 29.3             | 14.0                     |
| 5                                                 | #17325.00   | 52.8 PK                 | 74.0           | -21.2       | 2.02 V             | 235                  | 34.2             | 18.6                     |
| 6                                                 | #17325.00   | 40.5 AV                 | 54.0           | -13.5       | 2.02 V             | 235                  | 21.9             | 18.6                     |
| 7                                                 | 23100.00    | -                       | -              | -           | -                  | -                    | -                | -                        |
| 8                                                 | #28875.00   | -                       | -              | -           | -                  | -                    | -                | -                        |
| 9                                                 | #34650.00   | -                       | -              | -           | -                  | -                    | -                | -                        |

#### REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

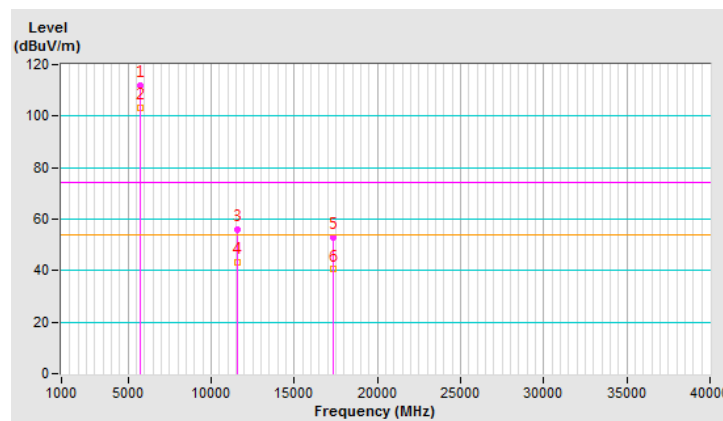


### 9.6.2 接收諧波

|         |                  |         |                                                |
|---------|------------------|---------|------------------------------------------------|
| 操作模式：   | 接收               |         |                                                |
| 基本波頻率：  | CH 36 : 5180 MHz | 測試儀器：   | (PK) RB=1MHz, VB=3MHz<br>(AV) RB=1MHz, VB=3MHz |
| 量測場地溫度： | 22°C             | 量測場地濕度： | 70%RH                                          |
| 測試日期：   | 105 年 10 月 7 日   | 測試者：    | 鄭樹營                                            |

| ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M |             |                         |                |             |                    |                      |                  |                          |
|-----------------------------------------------------|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| NO.                                                 | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
| 1                                                   | 3453.33     | 49.2 PK                 | 74.0           | -24.8       | 1.68 H             | 140                  | 52.4             | -3.2                     |
| 2                                                   | 3453.33     | 40.6 AV                 | 54.0           | -13.4       | 1.68 H             | 140                  | 43.8             | -3.2                     |
| 3                                                   | 6906.67     | 54.6 PK                 | 74.0           | -19.4       | 2.00 H             | 310                  | 48.0             | 6.6                      |
| 4                                                   | 6906.67     | 44.5 AV                 | 54.0           | -9.5        | 2.00 H             | 310                  | 37.9             | 6.6                      |

#### REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

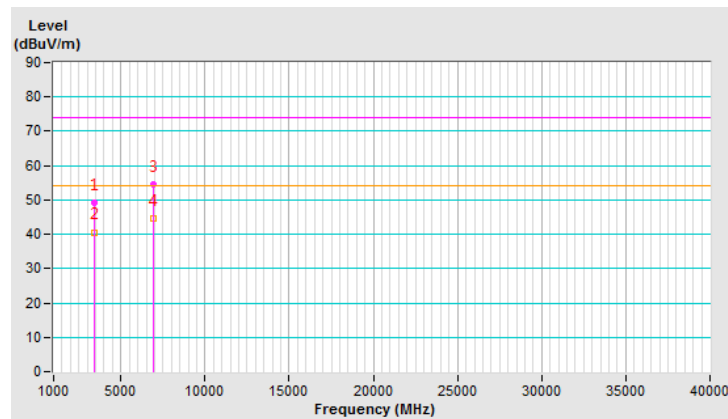


|         |                  |         |                                                |
|---------|------------------|---------|------------------------------------------------|
| 操作模式：   | 接收               |         |                                                |
| 基本波頻率：  | CH 36 : 5180 MHz | 測試儀器：   | (PK) RB=1MHz, VB=3MHz<br>(AV) RB=1MHz, VB=3MHz |
| 量測場地溫度： | 22°C             | 量測場地濕度： | 70%RH                                          |
| 測試日期：   | 105 年 10 月 7 日   | 測試者：    | 鄭樹營                                            |

| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M |             |                         |                |             |                    |                      |                  |                          |
|---------------------------------------------------|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| NO.                                               | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
| 1                                                 | 3453.33     | 49.2 PK                 | 74.0           | -24.8       | 1.89 V             | 335                  | 52.4             | -3.2                     |
| 2                                                 | 3453.33     | 41.1 AV                 | 54.0           | -12.9       | 1.89 V             | 335                  | 44.3             | -3.2                     |
| 3                                                 | 6906.67     | 54.7 PK                 | 74.0           | -19.3       | 1.45 V             | 214                  | 48.1             | 6.6                      |
| 4                                                 | 6906.67     | 44.9 AV                 | 54.0           | -9.1        | 1.45 V             | 214                  | 38.3             | 6.6                      |

#### REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

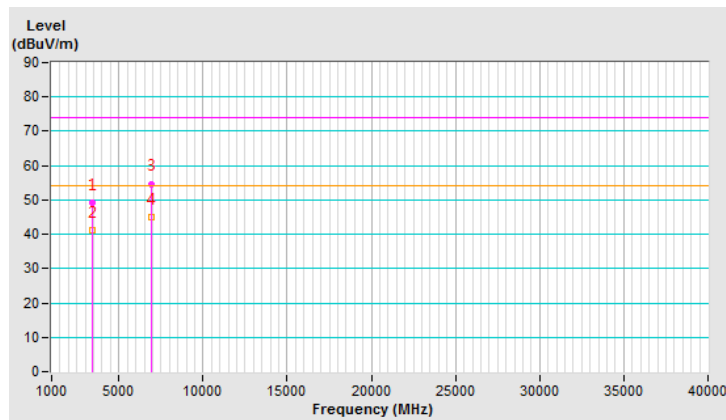


|         |                |         |                                                |
|---------|----------------|---------|------------------------------------------------|
| 操作模式：   | 接收             |         |                                                |
| 基本波頻率：  | CH 40：5200 MHz | 測試儀器：   | (PK) RB=1MHz, VB=3MHz<br>(AV) RB=1MHz, VB=3MHz |
| 量測場地溫度： | 22°C           | 量測場地濕度： | 70%RH                                          |
| 測試日期：   | 105 年 10 月 7 日 | 測試者：    | 鄭樹營                                            |

| ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M |                |                               |                   |                |                          |                            |                        |                                |
|-----------------------------------------------------|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| NO.                                                 | FREQ.<br>(MHz) | EMISSION<br>LEVEL<br>(dBuV/m) | LIMIT<br>(dBuV/m) | MARGIN<br>(dB) | ANTENNA<br>HEIGHT<br>(m) | TABLE<br>ANGLE<br>(Degree) | RAW<br>VALUE<br>(dBuV) | CORRECTION<br>FACTOR<br>(dB/m) |
| 1                                                   | 3466.67        | 48.8 PK                       | 74.0              | -25.2          | 1.62 H                   | 128                        | 51.9                   | -3.1                           |
| 2                                                   | 3466.67        | 40.2 AV                       | 54.0              | -13.8          | 1.62 H                   | 128                        | 43.3                   | -3.1                           |
| 3                                                   | 6933.33        | 54.8 PK                       | 74.0              | -19.2          | 2.01 H                   | 307                        | 48.2                   | 6.6                            |
| 4                                                   | 6933.33        | 44.6 AV                       | 54.0              | -9.4           | 2.01 H                   | 307                        | 38.0                   | 6.6                            |

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

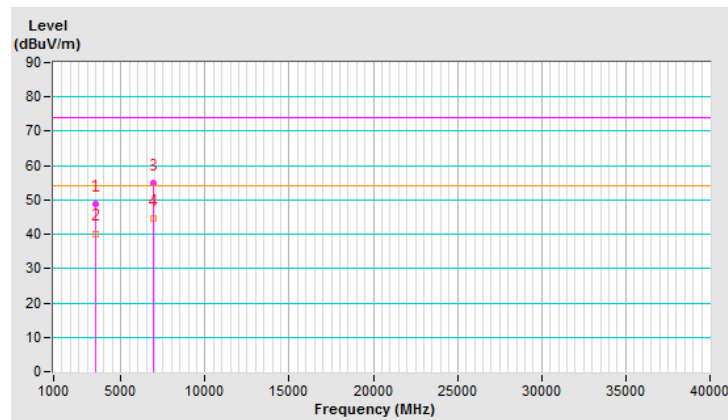


|         |                |         |                                                |
|---------|----------------|---------|------------------------------------------------|
| 操作模式：   | 接收             |         |                                                |
| 基本波頻率：  | CH 40：5200 MHz | 測試儀器：   | (PK) RB=1MHz, VB=3MHz<br>(AV) RB=1MHz, VB=3MHz |
| 量測場地溫度： | 22°C           | 量測場地濕度： | 70%RH                                          |
| 測試日期：   | 105 年 10 月 7 日 | 測試者：    | 鄭樹營                                            |

| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M |                |                               |                   |                |                          |                            |                        |                                |
|---------------------------------------------------|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| NO.                                               | FREQ.<br>(MHz) | EMISSION<br>LEVEL<br>(dBuV/m) | LIMIT<br>(dBuV/m) | MARGIN<br>(dB) | ANTENNA<br>HEIGHT<br>(m) | TABLE<br>ANGLE<br>(Degree) | RAW<br>VALUE<br>(dBuV) | CORRECTION<br>FACTOR<br>(dB/m) |
| 1                                                 | 3466.67        | 49.0 PK                       | 74.0              | -25.0          | 1.85 V                   | 325                        | 52.1                   | -3.1                           |
| 2                                                 | 3466.67        | 40.9 AV                       | 54.0              | -13.1          | 1.85 V                   | 325                        | 44.0                   | -3.1                           |
| 3                                                 | 6933.33        | 54.6 PK                       | 74.0              | -19.4          | 1.46 V                   | 219                        | 48.0                   | 6.6                            |
| 4                                                 | 6933.33        | 45.1 AV                       | 54.0              | -8.9           | 1.46 V                   | 219                        | 38.5                   | 6.6                            |

#### REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

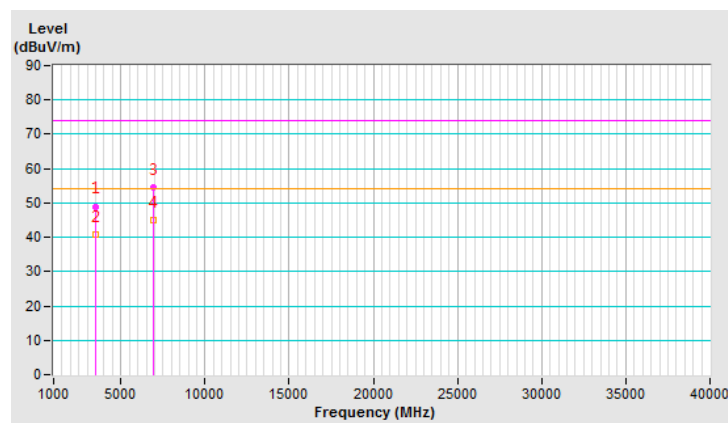


|         |                |         |                                                |
|---------|----------------|---------|------------------------------------------------|
| 操作模式：   | 接收             |         |                                                |
| 基本波頻率：  | CH 48：5240 MHz | 測試儀器：   | (PK) RB=1MHz, VB=3MHz<br>(AV) RB=1MHz, VB=3MHz |
| 量測場地溫度： | 22°C           | 量測場地濕度： | 70%RH                                          |
| 測試日期：   | 105 年 10 月 7 日 | 測試者：    | 鄭樹營                                            |

| ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M |                |                               |                   |                |                          |                            |                        |                                |
|-----------------------------------------------------|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| NO.                                                 | FREQ.<br>(MHz) | EMISSION<br>LEVEL<br>(dBuV/m) | LIMIT<br>(dBuV/m) | MARGIN<br>(dB) | ANTENNA<br>HEIGHT<br>(m) | TABLE<br>ANGLE<br>(Degree) | RAW<br>VALUE<br>(dBuV) | CORRECTION<br>FACTOR<br>(dB/m) |
| 1                                                   | 3493.33        | 48.7 PK                       | 74.0              | -25.3          | 1.71 H                   | 141                        | 51.8                   | -3.1                           |
| 2                                                   | 3493.33        | 40.3 AV                       | 54.0              | -13.7          | 1.71 H                   | 141                        | 43.4                   | -3.1                           |
| 3                                                   | 6986.67        | 54.0 PK                       | 74.0              | -20.0          | 2.02 H                   | 306                        | 47.2                   | 6.8                            |
| 4                                                   | 6986.67        | 44.1 AV                       | 54.0              | -9.9           | 2.02 H                   | 306                        | 37.3                   | 6.8                            |

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

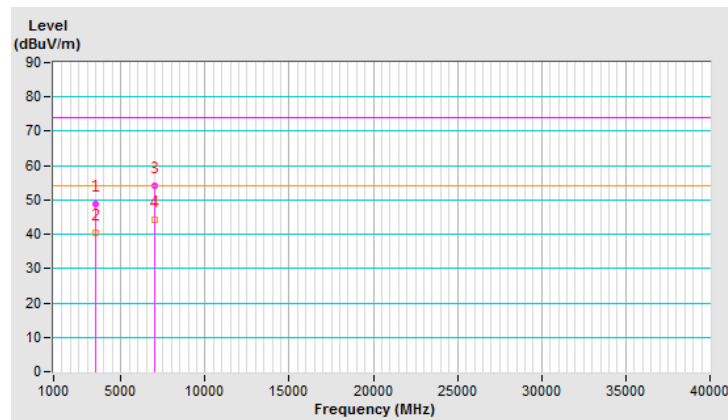


|         |                  |         |                                                |
|---------|------------------|---------|------------------------------------------------|
| 操作模式：   | 接收               |         |                                                |
| 基本波頻率：  | CH 48 : 5240 MHz | 測試儀器：   | (PK) RB=1MHz, VB=3MHz<br>(AV) RB=1MHz, VB=3MHz |
| 量測場地溫度： | 22°C             | 量測場地濕度： | 70%RH                                          |
| 測試日期：   | 105 年 10 月 7 日   | 測試者：    | 鄭樹營                                            |

| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M |             |                         |                |             |                    |                      |                  |                          |
|---------------------------------------------------|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| NO.                                               | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
| 1                                                 | 3493.33     | 49.6 PK                 | 74.0           | -24.4       | 1.91 V             | 341                  | 52.7             | -3.1                     |
| 2                                                 | 3493.33     | 41.6 AV                 | 54.0           | -12.4       | 1.91 V             | 341                  | 44.7             | -3.1                     |
| 3                                                 | 6986.67     | 55.3 PK                 | 74.0           | -18.7       | 1.44 V             | 205                  | 48.5             | 6.8                      |
| 4                                                 | 6986.67     | 45.3 AV                 | 54.0           | -8.7        | 1.44 V             | 205                  | 38.5             | 6.8                      |

#### REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

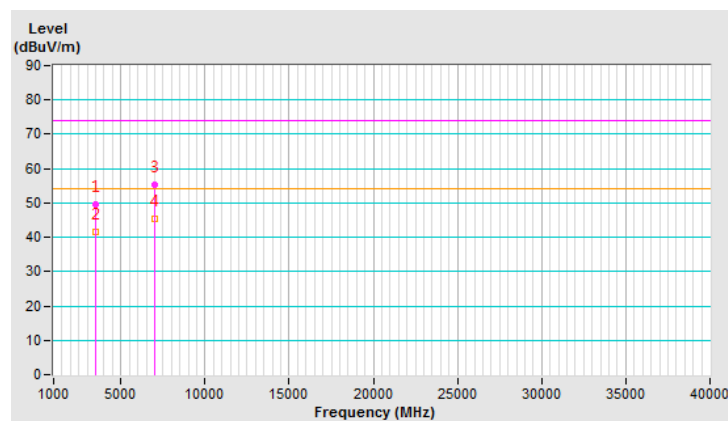


|         |                  |         |                                                |
|---------|------------------|---------|------------------------------------------------|
| 操作模式：   | 接收               |         |                                                |
| 基本波頻率：  | CH 52 : 5260 MHz | 測試儀器：   | (PK) RB=1MHz, VB=3MHz<br>(AV) RB=1MHz, VB=3MHz |
| 量測場地溫度： | 23°C             | 量測場地濕度： | 68%RH                                          |
| 測試日期：   | 105 年 11 月 10 日  | 測試者：    | 羅益偉                                            |

| ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M |                |                               |                   |                |                          |                            |                        |                                |
|-----------------------------------------------------|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| NO.                                                 | FREQ.<br>(MHz) | EMISSION<br>LEVEL<br>(dBuV/m) | LIMIT<br>(dBuV/m) | MARGIN<br>(dB) | ANTENNA<br>HEIGHT<br>(m) | TABLE<br>ANGLE<br>(Degree) | RAW<br>VALUE<br>(dBuV) | CORRECTION<br>FACTOR<br>(dB/m) |
| 1                                                   | 3506.67        | 49.3 PK                       | 74.0              | -24.7          | 1.75 H                   | 136                        | 52.4                   | -3.1                           |
| 2                                                   | 3506.67        | 40.4 AV                       | 54.0              | -13.6          | 1.75 H                   | 136                        | 43.5                   | -3.1                           |
| 3                                                   | 7013.33        | 54.7 PK                       | 74.0              | -19.3          | 2.08 H                   | 296                        | 47.9                   | 6.8                            |
| 4                                                   | 7013.33        | 44.7 AV                       | 54.0              | -9.3           | 2.08 H                   | 296                        | 37.9                   | 6.8                            |

#### REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

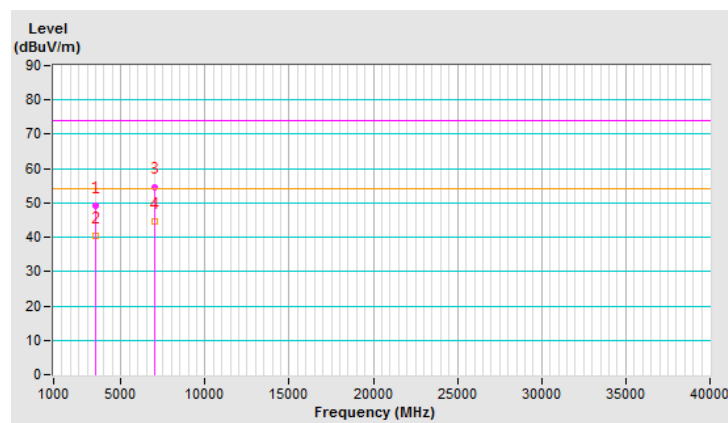


|         |                  |         |                                                |
|---------|------------------|---------|------------------------------------------------|
| 操作模式：   | 接收               |         |                                                |
| 基本波頻率：  | CH 52 : 5260 MHz | 測試儀器：   | (PK) RB=1MHz, VB=3MHz<br>(AV) RB=1MHz, VB=3MHz |
| 量測場地溫度： | 23°C             | 量測場地濕度： | 68%RH                                          |
| 測試日期：   | 105 年 11 月 10 日  | 測試者：    | 羅益偉                                            |

| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M |                |                               |                   |                |                          |                            |                        |                                |
|---------------------------------------------------|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| NO.                                               | FREQ.<br>(MHz) | EMISSION<br>LEVEL<br>(dBuV/m) | LIMIT<br>(dBuV/m) | MARGIN<br>(dB) | ANTENNA<br>HEIGHT<br>(m) | TABLE<br>ANGLE<br>(Degree) | RAW<br>VALUE<br>(dBuV) | CORRECTION<br>FACTOR<br>(dB/m) |
| 1                                                 | 3506.67        | 49.3 PK                       | 74.0              | -24.7          | 1.89 V                   | 342                        | 52.4                   | -3.1                           |
| 2                                                 | 3506.67        | 41.0 AV                       | 54.0              | -13.0          | 1.89 V                   | 342                        | 44.1                   | -3.1                           |
| 3                                                 | 7013.33        | 54.5 PK                       | 74.0              | -19.5          | 1.41 V                   | 196                        | 47.7                   | 6.8                            |
| 4                                                 | 7013.33        | 44.8 AV                       | 54.0              | -9.2           | 1.41 V                   | 196                        | 38.0                   | 6.8                            |

#### REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

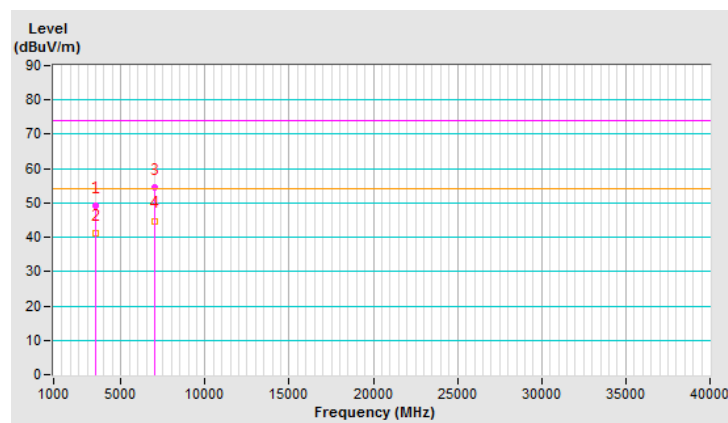


|         |                 |         |                                                |
|---------|-----------------|---------|------------------------------------------------|
| 操作模式：   | 接收              |         |                                                |
| 基本波頻率：  | CH 60：5300 MHz  | 測試儀器：   | (PK) RB=1MHz, VB=3MHz<br>(AV) RB=1MHz, VB=3MHz |
| 量測場地溫度： | 23°C            | 量測場地濕度： | 68%RH                                          |
| 測試日期：   | 105 年 11 月 10 日 | 測試者：    | 羅益偉                                            |

| ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M |             |                         |                |             |                    |                      |                  |                          |
|-----------------------------------------------------|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| NO.                                                 | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
| 1                                                   | 3533.33     | 48.9 PK                 | 74.0           | -25.1       | 1.70 H             | 132                  | 52.0             | -3.1                     |
| 2                                                   | 3533.33     | 40.2 AV                 | 54.0           | -13.8       | 1.70 H             | 132                  | 43.3             | -3.1                     |
| 3                                                   | 7066.67     | 54.4 PK                 | 74.0           | -19.6       | 2.05 H             | 309                  | 47.3             | 7.1                      |
| 4                                                   | 7066.67     | 44.4 AV                 | 54.0           | -9.6        | 2.05 H             | 309                  | 37.3             | 7.1                      |

#### REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

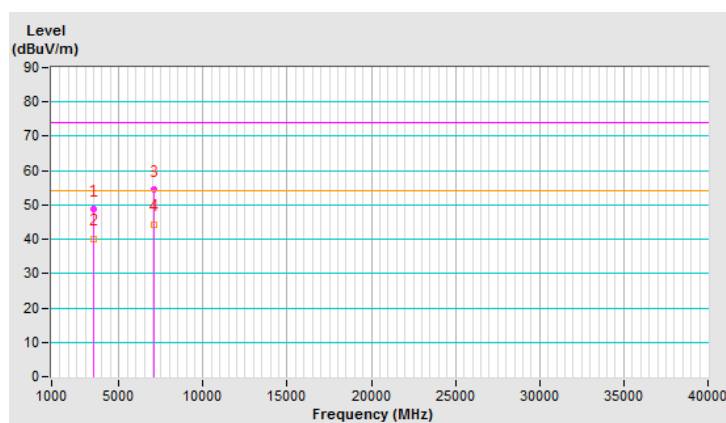


|         |                 |         |                                                |
|---------|-----------------|---------|------------------------------------------------|
| 操作模式：   | 接收              |         |                                                |
| 基本波頻率：  | CH 60：5300 MHz  | 測試儀器：   | (PK) RB=1MHz, VB=3MHz<br>(AV) RB=1MHz, VB=3MHz |
| 量測場地溫度： | 23°C            | 量測場地濕度： | 68%RH                                          |
| 測試日期：   | 105 年 11 月 10 日 | 測試者：    | 羅益偉                                            |

| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M |                |                               |                   |                |                          |                            |                        |                                |
|---------------------------------------------------|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| NO.                                               | FREQ.<br>(MHz) | EMISSION<br>LEVEL<br>(dBuV/m) | LIMIT<br>(dBuV/m) | MARGIN<br>(dB) | ANTENNA<br>HEIGHT<br>(m) | TABLE<br>ANGLE<br>(Degree) | RAW<br>VALUE<br>(dBuV) | CORRECTION<br>FACTOR<br>(dB/m) |
| 1                                                 | 3533.33        | 49.1 PK                       | 74.0              | -24.9          | 1.94 V                   | 354                        | 52.2                   | -3.1                           |
| 2                                                 | 3533.33        | 40.9 AV                       | 54.0              | -13.1          | 1.94 V                   | 354                        | 44.0                   | -3.1                           |
| 3                                                 | 7066.67        | 54.5 PK                       | 74.0              | -19.5          | 1.43 V                   | 211                        | 47.4                   | 7.1                            |
| 4                                                 | 7066.67        | 44.6 AV                       | 54.0              | -9.4           | 1.43 V                   | 211                        | 37.5                   | 7.1                            |

#### REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

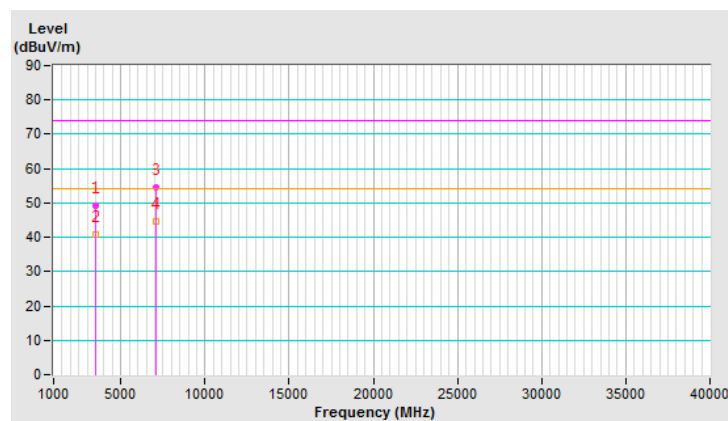


|         |                  |         |                                                |
|---------|------------------|---------|------------------------------------------------|
| 操作模式：   | 接收               |         |                                                |
| 基本波頻率：  | CH 64 : 5320 MHz | 測試儀器：   | (PK) RB=1MHz, VB=3MHz<br>(AV) RB=1MHz, VB=3MHz |
| 量測場地溫度： | 23°C             | 量測場地濕度： | 68%RH                                          |
| 測試日期：   | 105 年 11 月 10 日  | 測試者：    | 羅益偉                                            |

| ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M |                |                               |                   |                |                          |                            |                        |                                |
|-----------------------------------------------------|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| NO.                                                 | FREQ.<br>(MHz) | EMISSION<br>LEVEL<br>(dBuV/m) | LIMIT<br>(dBuV/m) | MARGIN<br>(dB) | ANTENNA<br>HEIGHT<br>(m) | TABLE<br>ANGLE<br>(Degree) | RAW<br>VALUE<br>(dBuV) | CORRECTION<br>FACTOR<br>(dB/m) |
| 1                                                   | 3546.67        | 49.0 PK                       | 74.0              | -25.0          | 1.68 H                   | 138                        | 52.1                   | -3.1                           |
| 2                                                   | 3546.67        | 40.4 AV                       | 54.0              | -13.6          | 1.68 H                   | 138                        | 43.5                   | -3.1                           |
| 3                                                   | 7093.33        | 55.1 PK                       | 74.0              | -18.9          | 2.04 H                   | 305                        | 47.9                   | 7.2                            |
| 4                                                   | 7093.33        | 44.5 AV                       | 54.0              | -9.5           | 2.04 H                   | 305                        | 37.3                   | 7.2                            |

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

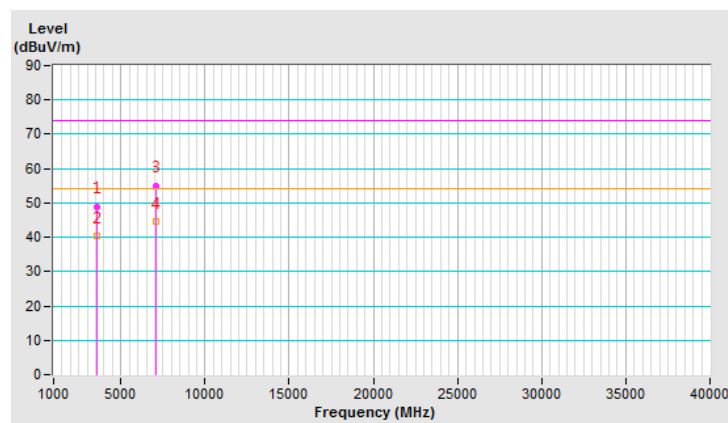


|         |                  |         |                                                |
|---------|------------------|---------|------------------------------------------------|
| 操作模式：   | 接收               |         |                                                |
| 基本波頻率：  | CH 64 : 5320 MHz | 測試儀器：   | (PK) RB=1MHz, VB=3MHz<br>(AV) RB=1MHz, VB=3MHz |
| 量測場地溫度： | 23°C             | 量測場地濕度： | 68%RH                                          |
| 測試日期：   | 105 年 11 月 10 日  | 測試者：    | 羅益偉                                            |

| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M |             |                         |                |             |                    |                      |                  |                          |
|---------------------------------------------------|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| NO.                                               | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
| 1                                                 | 3546.67     | 48.6 PK                 | 74.0           | -25.4       | 1.93 V             | 337                  | 51.7             | -3.1                     |
| 2                                                 | 3546.67     | 40.6 AV                 | 54.0           | -13.4       | 1.93 V             | 337                  | 43.7             | -3.1                     |
| 3                                                 | 7093.33     | 54.8 PK                 | 74.0           | -19.2       | 1.33 V             | 203                  | 47.6             | 7.2                      |
| 4                                                 | 7093.33     | 44.8 AV                 | 54.0           | -9.2        | 1.33 V             | 203                  | 37.6             | 7.2                      |

#### REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

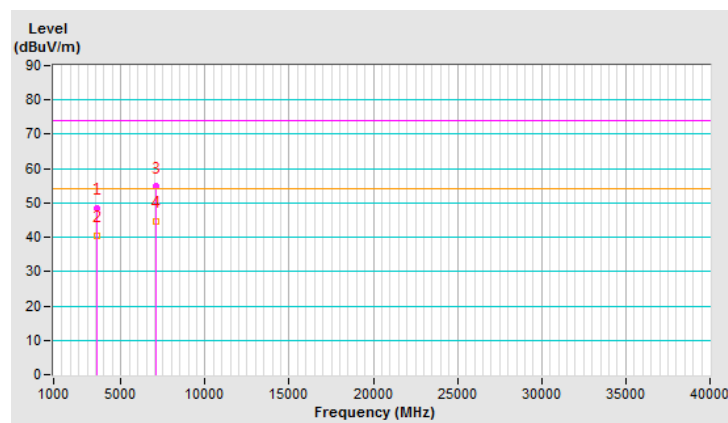


|         |                   |         |                                                |
|---------|-------------------|---------|------------------------------------------------|
| 操作模式：   | 接收                |         |                                                |
| 基本波頻率：  | CH 100 : 5500 MHz | 測試儀器：   | (PK) RB=1MHz, VB=3MHz<br>(AV) RB=1MHz, VB=3MHz |
| 量測場地溫度： | 23°C              | 量測場地濕度： | 68%RH                                          |
| 測試日期：   | 105 年 11 月 10 日   | 測試者：    | 羅益偉                                            |

| ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M |             |                         |                |             |                    |                      |                  |                          |
|-----------------------------------------------------|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| NO.                                                 | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
| 1                                                   | 3666.67     | 49.6 PK                 | 74.0           | -24.4       | 1.69 H             | 110                  | 52.3             | -2.7                     |
| 2                                                   | 3666.67     | 40.8 AV                 | 54.0           | -13.2       | 1.69 H             | 110                  | 43.5             | -2.7                     |
| 3                                                   | 7333.33     | 55.0 PK                 | 74.0           | -19.0       | 2.07 H             | 303                  | 47.5             | 7.5                      |
| 4                                                   | 7333.33     | 44.9 AV                 | 54.0           | -9.1        | 2.07 H             | 303                  | 37.4             | 7.5                      |

#### REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

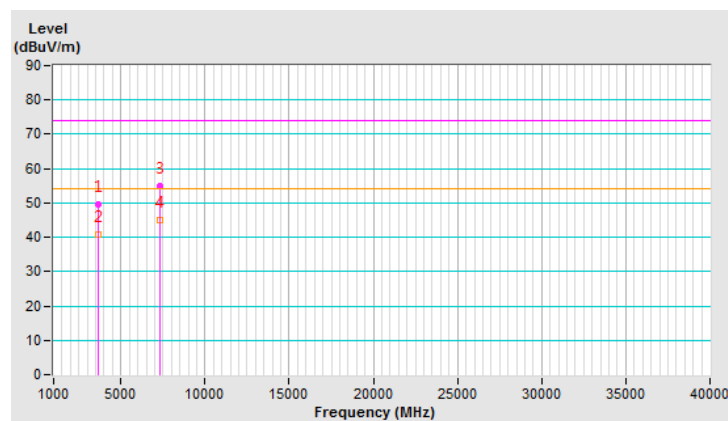


|         |                   |         |                                                |
|---------|-------------------|---------|------------------------------------------------|
| 操作模式：   | 接收                |         |                                                |
| 基本波頻率：  | CH 100 : 5500 MHz | 測試儀器：   | (PK) RB=1MHz, VB=3MHz<br>(AV) RB=1MHz, VB=3MHz |
| 量測場地溫度： | 23°C              | 量測場地濕度： | 68%RH                                          |
| 測試日期：   | 105 年 11 月 10 日   | 測試者：    | 羅益偉                                            |

| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M |             |                         |                |             |                    |                      |                  |                          |
|---------------------------------------------------|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| NO.                                               | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
| 1                                                 | 3666.67     | 49.5 PK                 | 74.0           | -24.5       | 1.88 V             | 351                  | 52.2             | -2.7                     |
| 2                                                 | 3666.67     | 41.2 AV                 | 54.0           | -12.8       | 1.88 V             | 351                  | 43.9             | -2.7                     |
| 3                                                 | 7333.33     | 54.4 PK                 | 74.0           | -19.6       | 1.42 V             | 219                  | 46.9             | 7.5                      |
| 4                                                 | 7333.33     | 44.8 AV                 | 54.0           | -9.2        | 1.42 V             | 219                  | 37.3             | 7.5                      |

#### REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

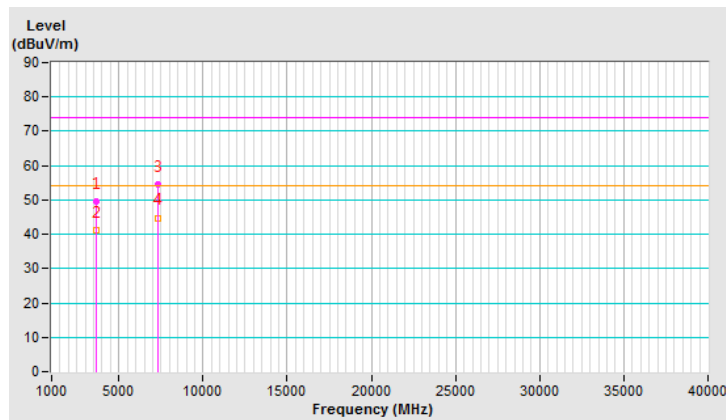


|         |                 |         |                                                |
|---------|-----------------|---------|------------------------------------------------|
| 操作模式：   | 接收              |         |                                                |
| 基本波頻率：  | CH 116：5580 MHz | 測試儀器：   | (PK) RB=1MHz, VB=3MHz<br>(AV) RB=1MHz, VB=3MHz |
| 量測場地溫度： | 23°C            | 量測場地濕度： | 68%RH                                          |
| 測試日期：   | 105 年 11 月 10 日 | 測試者：    | 羅益偉                                            |

| ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M |                |                               |                   |                |                          |                            |                        |                                |
|-----------------------------------------------------|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| NO.                                                 | FREQ.<br>(MHz) | EMISSION<br>LEVEL<br>(dBuV/m) | LIMIT<br>(dBuV/m) | MARGIN<br>(dB) | ANTENNA<br>HEIGHT<br>(m) | TABLE<br>ANGLE<br>(Degree) | RAW<br>VALUE<br>(dBuV) | CORRECTION<br>FACTOR<br>(dB/m) |
| 1                                                   | 3720.00        | 49.2 PK                       | 74.0              | -24.8          | 1.77 H                   | 119                        | 51.6                   | -2.4                           |
| 2                                                   | 3720.00        | 40.8 AV                       | 54.0              | -13.2          | 1.77 H                   | 119                        | 43.2                   | -2.4                           |
| 3                                                   | 7440.00        | 55.5 PK                       | 74.0              | -18.5          | 2.03 H                   | 309                        | 47.8                   | 7.7                            |
| 4                                                   | 7440.00        | 44.9 AV                       | 54.0              | -9.1           | 2.03 H                   | 309                        | 37.2                   | 7.7                            |

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

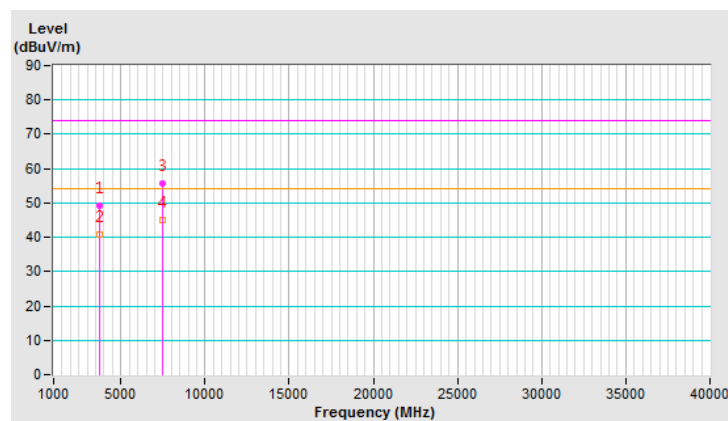


|         |                 |         |                                                |
|---------|-----------------|---------|------------------------------------------------|
| 操作模式：   | 接收              |         |                                                |
| 基本波頻率：  | CH 116：5580 MHz | 測試儀器：   | (PK) RB=1MHz, VB=3MHz<br>(AV) RB=1MHz, VB=3MHz |
| 量測場地溫度： | 23°C            | 量測場地濕度： | 68%RH                                          |
| 測試日期：   | 105 年 11 月 10 日 | 測試者：    | 羅益偉                                            |

| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M |                |                               |                   |                |                          |                            |                        |                                |
|---------------------------------------------------|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| NO.                                               | FREQ.<br>(MHz) | EMISSION<br>LEVEL<br>(dBuV/m) | LIMIT<br>(dBuV/m) | MARGIN<br>(dB) | ANTENNA<br>HEIGHT<br>(m) | TABLE<br>ANGLE<br>(Degree) | RAW<br>VALUE<br>(dBuV) | CORRECTION<br>FACTOR<br>(dB/m) |
| 1                                                 | 3720.00        | 48.8 PK                       | 74.0              | -25.2          | 1.86 V                   | 339                        | 51.2                   | -2.4                           |
| 2                                                 | 3720.00        | 40.5 AV                       | 54.0              | -13.5          | 1.86 V                   | 339                        | 42.9                   | -2.4                           |
| 3                                                 | 7440.00        | 54.4 PK                       | 74.0              | -19.6          | 1.43 V                   | 215                        | 46.7                   | 7.7                            |
| 4                                                 | 7440.00        | 44.5 AV                       | 54.0              | -9.5           | 1.43 V                   | 215                        | 36.8                   | 7.7                            |

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

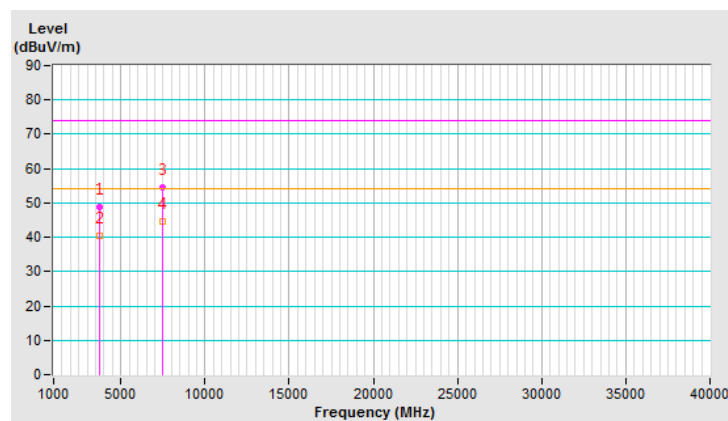


|         |                 |         |                                                |
|---------|-----------------|---------|------------------------------------------------|
| 操作模式：   | 接收              |         |                                                |
| 基本波頻率：  | CH 140：5700 MHz | 測試儀器：   | (PK) RB=1MHz, VB=3MHz<br>(AV) RB=1MHz, VB=3MHz |
| 量測場地溫度： | 23°C            | 量測場地濕度： | 68%RH                                          |
| 測試日期：   | 105 年 11 月 10 日 | 測試者：    | 羅益偉                                            |

| ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M |                |                               |                   |                |                          |                            |                        |                                |
|-----------------------------------------------------|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| NO.                                                 | FREQ.<br>(MHz) | EMISSION<br>LEVEL<br>(dBuV/m) | LIMIT<br>(dBuV/m) | MARGIN<br>(dB) | ANTENNA<br>HEIGHT<br>(m) | TABLE<br>ANGLE<br>(Degree) | RAW<br>VALUE<br>(dBuV) | CORRECTION<br>FACTOR<br>(dB/m) |
| 1                                                   | 3800.00        | 49.5 PK                       | 74.0              | -24.5          | 1.71 H                   | 138                        | 51.6                   | -2.1                           |
| 2                                                   | 3800.00        | 41.0 AV                       | 54.0              | -13.0          | 1.71 H                   | 138                        | 43.1                   | -2.1                           |
| 3                                                   | 7600.00        | 55.0 PK                       | 74.0              | -19.0          | 1.99 H                   | 303                        | 46.9                   | 8.1                            |
| 4                                                   | 7600.00        | 44.6 AV                       | 54.0              | -9.4           | 1.99 H                   | 303                        | 36.5                   | 8.1                            |

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

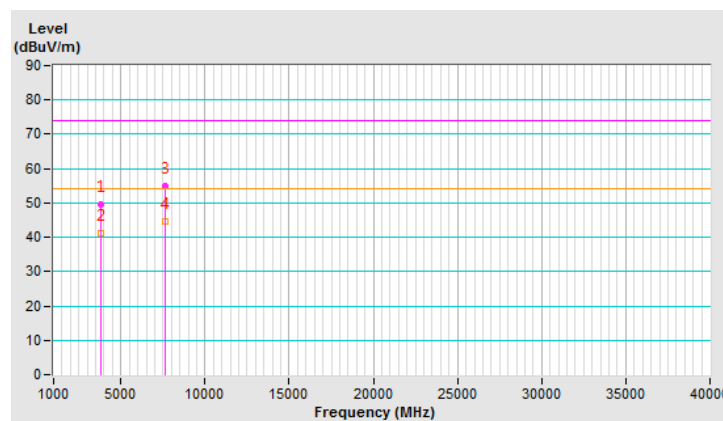


|         |                 |         |                                                |
|---------|-----------------|---------|------------------------------------------------|
| 操作模式：   | 接收              |         |                                                |
| 基本波頻率：  | CH 140：5700 MHz | 測試儀器：   | (PK) RB=1MHz, VB=3MHz<br>(AV) RB=1MHz, VB=3MHz |
| 量測場地溫度： | 23°C            | 量測場地濕度： | 68%RH                                          |
| 測試日期：   | 105 年 11 月 10 日 | 測試者：    | 羅益偉                                            |

| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M |                |                               |                   |                |                          |                            |                        |                                |
|---------------------------------------------------|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| NO.                                               | FREQ.<br>(MHz) | EMISSION<br>LEVEL<br>(dBuV/m) | LIMIT<br>(dBuV/m) | MARGIN<br>(dB) | ANTENNA<br>HEIGHT<br>(m) | TABLE<br>ANGLE<br>(Degree) | RAW<br>VALUE<br>(dBuV) | CORRECTION<br>FACTOR<br>(dB/m) |
| 1                                                 | 3800.00        | 49.0 PK                       | 74.0              | -25.0          | 1.89 V                   | 360                        | 51.1                   | -2.1                           |
| 2                                                 | 3800.00        | 40.7 AV                       | 54.0              | -13.3          | 1.89 V                   | 360                        | 42.8                   | -2.1                           |
| 3                                                 | 7600.00        | 54.7 PK                       | 74.0              | -19.3          | 1.41 V                   | 198                        | 46.6                   | 8.1                            |
| 4                                                 | 7600.00        | 45.0 AV                       | 54.0              | -9.0           | 1.41 V                   | 198                        | 36.9                   | 8.1                            |

#### REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

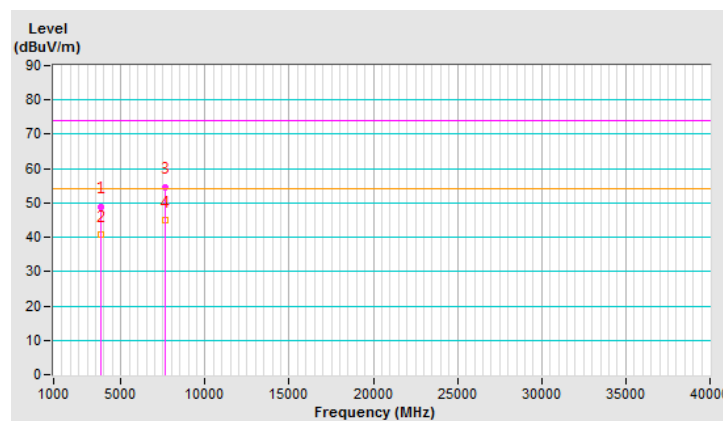


|         |                   |         |                                                |
|---------|-------------------|---------|------------------------------------------------|
| 操作模式：   | 接收                |         |                                                |
| 基本波頻率：  | CH 149 : 5745 MHz | 測試儀器：   | (PK) RB=1MHz, VB=3MHz<br>(AV) RB=1MHz, VB=3MHz |
| 量測場地溫度： | 22°C              | 量測場地濕度： | 70%RH                                          |
| 測試日期：   | 105 年 10 月 7 日    | 測試者：    | 鄭樹營                                            |

| ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M |             |                         |                |             |                    |                      |                  |                          |
|-----------------------------------------------------|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| NO.                                                 | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
| 1                                                   | 3830.00     | 49.2 PK                 | 74.0           | -24.8       | 1.69 H             | 130                  | 51.3             | -2.1                     |
| 2                                                   | 3830.00     | 40.9 AV                 | 54.0           | -13.1       | 1.69 H             | 130                  | 43.0             | -2.1                     |
| 3                                                   | 7660.00     | 54.4 PK                 | 74.0           | -19.6       | 1.98 H             | 311                  | 46.2             | 8.2                      |
| 4                                                   | 7660.00     | 44.2 AV                 | 54.0           | -9.8        | 1.98 H             | 311                  | 36.0             | 8.2                      |

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

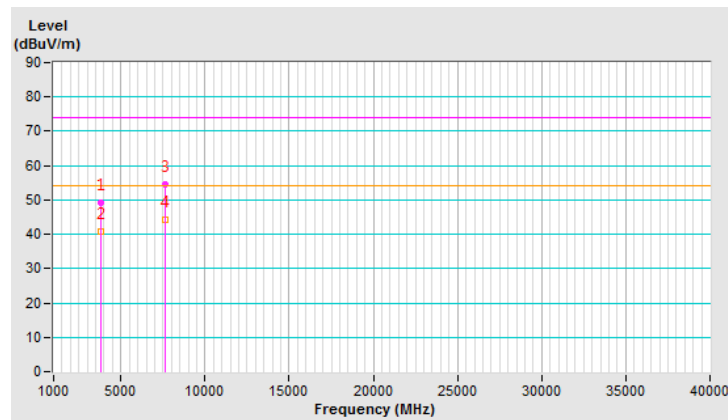


|         |                   |         |                                                |
|---------|-------------------|---------|------------------------------------------------|
| 操作模式：   | 接收                |         |                                                |
| 基本波頻率：  | CH 149 : 5745 MHz | 測試儀器：   | (PK) RB=1MHz, VB=3MHz<br>(AV) RB=1MHz, VB=3MHz |
| 量測場地溫度： | 22°C              | 量測場地濕度： | 70%RH                                          |
| 測試日期：   | 105 年 10 月 7 日    | 測試者：    | 鄭樹營                                            |

| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M |                |                               |                   |                |                          |                            |                        |                                |
|---------------------------------------------------|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| NO.                                               | FREQ.<br>(MHz) | EMISSION<br>LEVEL<br>(dBuV/m) | LIMIT<br>(dBuV/m) | MARGIN<br>(dB) | ANTENNA<br>HEIGHT<br>(m) | TABLE<br>ANGLE<br>(Degree) | RAW<br>VALUE<br>(dBuV) | CORRECTION<br>FACTOR<br>(dB/m) |
| 1                                                 | 3830.00        | 49.6 PK                       | 74.0              | -24.4          | 1.87 V                   | 328                        | 51.7                   | -2.1                           |
| 2                                                 | 3830.00        | 41.2 AV                       | 54.0              | -12.8          | 1.87 V                   | 328                        | 43.3                   | -2.1                           |
| 3                                                 | 7660.00        | 55.0 PK                       | 74.0              | -19.0          | 1.40 V                   | 217                        | 46.8                   | 8.2                            |
| 4                                                 | 7660.00        | 45.4 AV                       | 54.0              | -8.6           | 1.40 V                   | 217                        | 37.2                   | 8.2                            |

#### REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

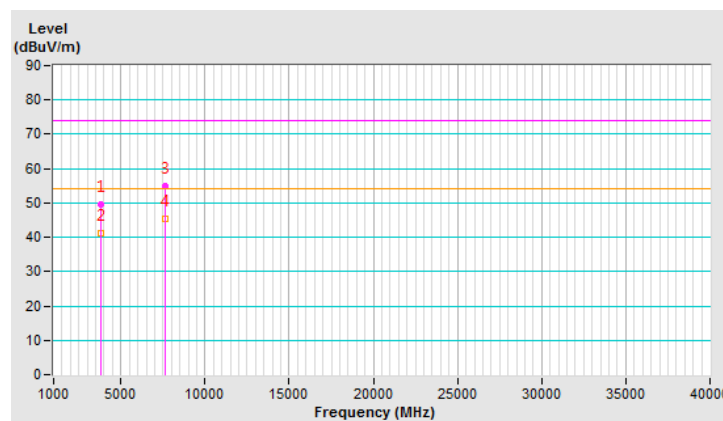


|         |                   |         |                                                |
|---------|-------------------|---------|------------------------------------------------|
| 操作模式：   | 接收                |         |                                                |
| 基本波頻率：  | CH 157 : 5785 MHz | 測試儀器：   | (PK) RB=1MHz, VB=3MHz<br>(AV) RB=1MHz, VB=3MHz |
| 量測場地溫度： | 22°C              | 量測場地濕度： | 70%RH                                          |
| 測試日期：   | 105 年 10 月 7 日    | 測試者：    | 鄭樹營                                            |

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

| NO. | FREQ.<br>(MHz) | EMISSION<br>LEVEL<br>(dBuV/m) | LIMIT<br>(dBuV/m) | MARGIN<br>(dB) | ANTENNA<br>HEIGHT<br>(m) | TABLE<br>ANGLE<br>(Degree) | RAW<br>VALUE<br>(dBuV) | CORRECTION<br>FACTOR<br>(dB/m) |
|-----|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| 1   | 3856.67        | 49.7 PK                       | 74.0              | -24.3          | 1.69 H                   | 128                        | 51.7                   | -2.0                           |
| 2   | 3856.67        | 40.9 AV                       | 54.0              | -13.1          | 1.69 H                   | 128                        | 42.9                   | -2.0                           |
| 3   | 7713.33        | 54.9 PK                       | 74.0              | -19.1          | 2.03 H                   | 305                        | 46.6                   | 8.3                            |
| 4   | 7713.33        | 44.7 AV                       | 54.0              | -9.3           | 2.03 H                   | 305                        | 36.4                   | 8.3                            |

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

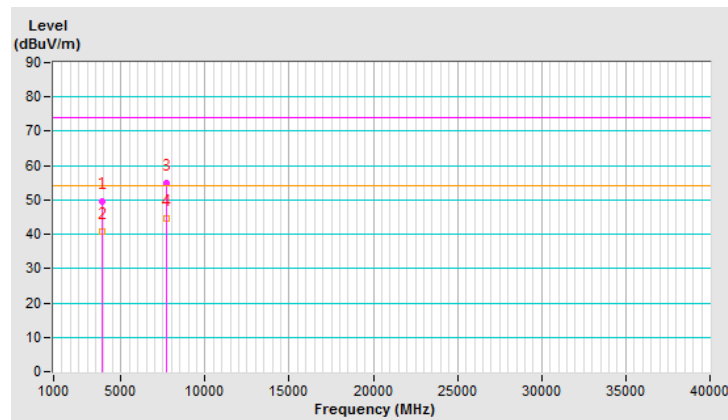


|         |                   |         |                                                |
|---------|-------------------|---------|------------------------------------------------|
| 操作模式：   | 接收                |         |                                                |
| 基本波頻率：  | CH 157 : 5785 MHz | 測試儀器：   | (PK) RB=1MHz, VB=3MHz<br>(AV) RB=1MHz, VB=3MHz |
| 量測場地溫度： | 22°C              | 量測場地濕度： | 70%RH                                          |
| 測試日期：   | 105 年 10 月 7 日    | 測試者：    | 鄭樹營                                            |

| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M |             |                         |                |             |                    |                      |                  |                          |
|---------------------------------------------------|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| NO.                                               | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
| 1                                                 | 3856.67     | 49.5 PK                 | 74.0           | -24.5       | 1.85 V             | 319                  | 51.5             | -2.0                     |
| 2                                                 | 3856.67     | 41.5 AV                 | 54.0           | -12.5       | 1.85 V             | 319                  | 43.5             | -2.0                     |
| 3                                                 | 7713.33     | 54.2 PK                 | 74.0           | -19.8       | 1.46 V             | 212                  | 45.9             | 8.3                      |
| 4                                                 | 7713.33     | 44.5 AV                 | 54.0           | -9.5        | 1.46 V             | 212                  | 36.2             | 8.3                      |

#### REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

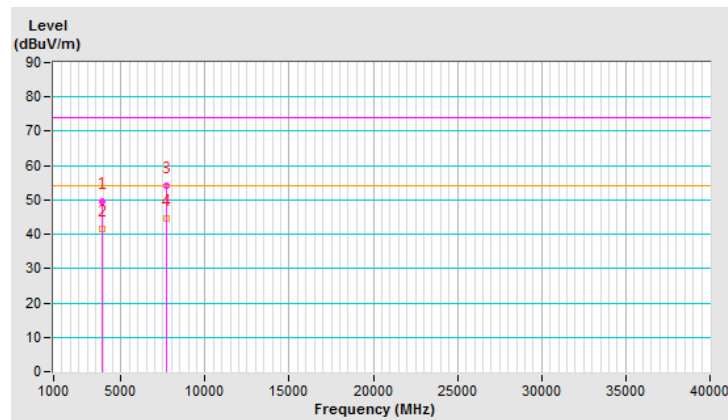


|         |                   |         |                                                |
|---------|-------------------|---------|------------------------------------------------|
| 操作模式：   | 接收                |         |                                                |
| 基本波頻率：  | CH 165 : 5825 MHz | 測試儀器：   | (PK) RB=1MHz, VB=3MHz<br>(AV) RB=1MHz, VB=3MHz |
| 量測場地溫度： | 22°C              | 量測場地濕度： | 70%RH                                          |
| 測試日期：   | 105 年 10 月 7 日    | 測試者：    | 鄭樹營                                            |

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

| NO. | FREQ.<br>(MHz) | EMISSION<br>LEVEL<br>(dBuV/m) | LIMIT<br>(dBuV/m) | MARGIN<br>(dB) | ANTENNA<br>HEIGHT<br>(m) | TABLE<br>ANGLE<br>(Degree) | RAW<br>VALUE<br>(dBuV) | CORRECTION<br>FACTOR<br>(dB/m) |
|-----|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| 1   | 3883.33        | 49.2 PK                       | 74.0              | -24.8          | 1.71 H                   | 124                        | 51.3                   | -2.1                           |
| 2   | 3883.33        | 40.6 AV                       | 54.0              | -13.4          | 1.71 H                   | 124                        | 42.7                   | -2.1                           |
| 3   | 7766.67        | 54.7 PK                       | 74.0              | -19.3          | 2.03 H                   | 299                        | 46.5                   | 8.2                            |
| 4   | 7766.67        | 44.4 AV                       | 54.0              | -9.6           | 2.03 H                   | 299                        | 36.2                   | 8.2                            |

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

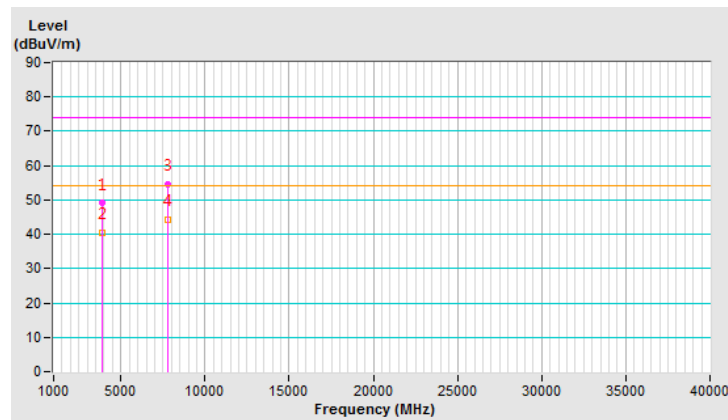


|         |                   |         |                                                |
|---------|-------------------|---------|------------------------------------------------|
| 操作模式：   | 接收                |         |                                                |
| 基本波頻率：  | CH 165 : 5825 MHz | 測試儀器：   | (PK) RB=1MHz, VB=3MHz<br>(AV) RB=1MHz, VB=3MHz |
| 量測場地溫度： | 22°C              | 量測場地濕度： | 70%RH                                          |
| 測試日期：   | 105 年 10 月 7 日    | 測試者：    | 鄭樹營                                            |

| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M |             |                         |                |             |                    |                      |                  |                          |
|---------------------------------------------------|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| NO.                                               | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
| 1                                                 | 3883.33     | 49.0 PK                 | 74.0           | -25.0       | 1.88 V             | 350                  | 51.1             | -2.1                     |
| 2                                                 | 3883.33     | 40.9 AV                 | 54.0           | -13.1       | 1.88 V             | 350                  | 43.0             | -2.1                     |
| 3                                                 | 7766.67     | 54.5 PK                 | 74.0           | -19.5       | 1.39 V             | 208                  | 46.3             | 8.2                      |
| 4                                                 | 7766.67     | 44.6 AV                 | 54.0           | -9.4        | 1.39 V             | 208                  | 36.4             | 8.2                      |

#### REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

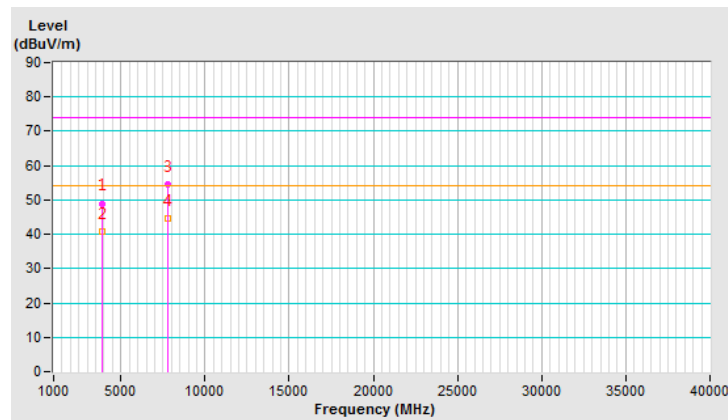

### 9.6.3 其它不必要之訊號


#### 802.11ac (VHT40)

|         |                 |         |                   |
|---------|-----------------|---------|-------------------|
| 操作模式：   | 發射接收            | 調變技術：   | OFDM              |
| 基本波頻率：  | CH 110：5550 MHz | 測試儀器：   | (QP) RB=VB=120kHz |
| 量測場地溫度： | 24°C            | 量測場地濕度： | 68%RH             |
| 測試日期：   | 106 年 10 月 5 日  | 測試者：    | 陳志毅               |

| ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M |             |                         |                |             |                    |                      |                  |                          |
|-----------------------------------------------------|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| NO.                                                 | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
| 1                                                   | 113.08      | 36.7 QP                 | 43.5           | -6.8        | 2.00 H             | 319                  | 47.5             | -10.8                    |
| 2                                                   | 139.27      | 34.9 QP                 | 43.5           | -8.6        | 2.00 H             | 84                   | 43.5             | -8.6                     |
| 3                                                   | 207.56      | 33.4 QP                 | 43.5           | -10.1       | 1.50 H             | 153                  | 45.0             | -11.6                    |
| 4                                                   | 391.20      | 38.1 QP                 | 46.0           | -7.9        | 2.00 H             | 314                  | 43.7             | -5.6                     |
| 5                                                   | 412.16      | 37.0 QP                 | 46.0           | -9.0        | 2.00 H             | 311                  | 42.0             | -5.0                     |
| 6                                                   | 438.76      | 35.0 QP                 | 46.0           | -11.0       | 2.00 H             | 301                  | 38.9             | -3.9                     |

#### REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit of frequency range 30MHz~1000MHz.
4. Margin value = Emission Level – Limit value
5. The emission levels were very low against the limit of frequency range 9kHz~30MHz.

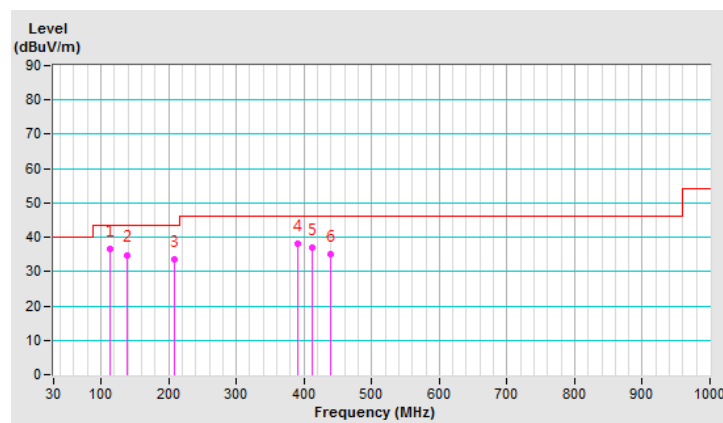


|         |                 |         |                   |
|---------|-----------------|---------|-------------------|
| 操作模式：   | 發射接收            | 調變技術：   | OFDM              |
| 基本波頻率：  | CH 110：5550 MHz | 測試儀器：   | (QP) RB=VB=120kHz |
| 量測場地溫度： | 24°C            | 量測場地濕度： | 68%RH             |
| 測試日期：   | 106 年 10 月 5 日  | 測試者：    | 陳志毅               |

#### ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

| NO. | FREQ.<br>(MHz) | EMISSION<br>LEVEL<br>(dBuV/m) | LIMIT<br>(dBuV/m) | MARGIN<br>(dB) | ANTENNA<br>HEIGHT<br>(m) | TABLE<br>ANGLE<br>(Degree) | RAW<br>VALUE<br>(dBuV) | CORRECTION<br>FACTOR<br>(dB/m) |
|-----|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| 1   | 45.20          | 36.7 QP                       | 40.0              | -3.3           | 1.00 V                   | 180                        | 45.0                   | -8.3                           |
| 2   | 106.73         | 34.8 QP                       | 43.5              | -8.7           | 1.00 V                   | 220                        | 46.2                   | -11.4                          |
| 3   | 357.25         | 40.1 QP                       | 46.0              | -5.9           | 1.00 V                   | 303                        | 46.4                   | -6.3                           |
| 4   | 380.15         | 42.2 QP                       | 46.0              | -3.8           | 1.00 V                   | 255                        | 48.0                   | -5.8                           |
| 5   | 425.61         | 37.3 QP                       | 46.0              | -8.7           | 1.00 V                   | 258                        | 41.7                   | -4.4                           |
| 6   | 492.93         | 38.6 QP                       | 46.0              | -7.4           | 1.00 V                   | 258                        | 41.9                   | -3.3                           |

#### REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit of frequency range 30MHz~1000MHz.
4. Margin value = Emission Level – Limit value
5. The emission levels were very low against the limit of frequency range 9kHz~30MHz.

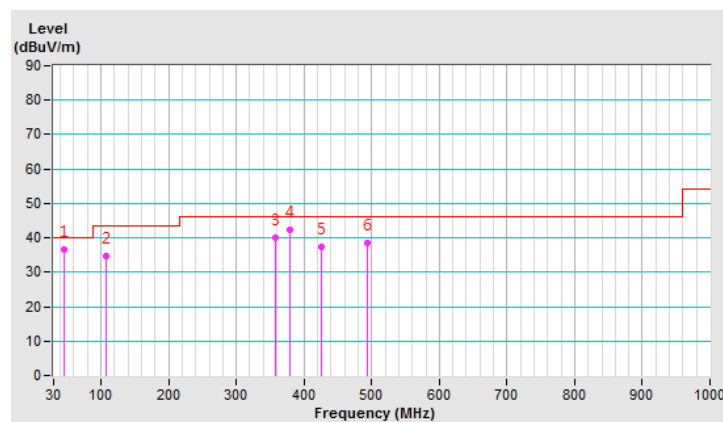

#### 9.7 量測結果判定

依據測試數據結果，符合低功率射頻電機技術規範之要求。

#### 9.8 輻射量測之配置照片

請參照 Test Setup Photos

## 10 電源線傳導干擾之量測

### 10.1 適用標準

請見本報告 3.1 節第 1 項的規定。

### 10.2 量測方法

將待測物置於 0.8 米高的非金屬桌面，使其操作在工作狀態，待測物電源線接至電源線阻抗穩定網路上，從測試接收機記錄頻率由 0.15 MHz 至 30 MHz 之間之電源線傳導放射強度。

### 10.3 量測儀器

| DESCRIPTION & MANUFACTURER                                          | MODEL NO.            | SERIAL NO. | CALIBRATED DATE | CALIBRATED UNTIL |
|---------------------------------------------------------------------|----------------------|------------|-----------------|------------------|
| Test Receiver<br>R&S                                                | ESCS 30              | 100375     | May 09, 2016    | May 08, 2017     |
| Line-Impedance<br>Stabilization Network<br>(for EUT)<br>SCHWARZBECK | NSLK-8127            | 8127-522   | Aug. 31, 2016   | Aug. 30, 2017    |
| Line-Impedance<br>Stabilization Network<br>(for Peripheral )<br>R&S | ENV216               | 100072     | June 13, 2016   | June 12, 2017    |
| RF Cable                                                            | 5D-FB                | COACAB-002 | Mar. 04, 2016   | Mar. 03, 2017    |
| 10 dB PAD<br>Mini-Circuits                                          | HAT-10+              | CONATT-003 | Sep. 13, 2016   | Sep. 12, 2017    |
| 50 ohms Terminator                                                  | N/A                  | EMC-03     | Sep. 29, 2016   | Sep. 28, 2017    |
| 50 ohms Terminator                                                  | N/A                  | EMC-02     | Sep. 29, 2016   | Sep. 28, 2017    |
| Software<br>BVADT                                                   | BVADT_Conf_ V7.3.7.4 | NA         | NA              | NA               |

#### Note:

1. The calibration interval of the above test instruments are 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in Shielded Room No. C.
3. The VCCI Con C Registration No. is C-3611.
4. The measurement uncertainty is 2.98 dB, which is calculated as per the document CISPR 16-4-2 This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

### 10.4 測試配置

同 5.4 節

### 10.5 干擾值之計算

餘裕度 Margin(dB)= 結果值 Emission level (dBuV)-限制值 Limit value (dBuV)

電源傳導干擾電壓之計算公式如下

結果值 Emission level (dBuV)=校正因子 Correction Factor (dB)+儀器讀值 Reading value (dBuV)

其中校正因子 Correction Factor (dB)為：

饋線損失+電源阻抗模擬網路損失


## 10.6 量測結果 (模式一)

|       |                 |        |                 |
|-------|-----------------|--------|-----------------|
| 操作模式  | 發射              | 測試日期   | 105 年 11 月 16 日 |
| 基本波頻率 | Ch 110: 5550MHz | 量測場地溫度 | 26°C            |
| 調變技術  | OFDM            | 量測場地濕度 | 60%RH           |
| 測試者   | 李慶貫             | 測試模式   | 一               |

|          |       | 6 dB Bandwidth: 9kHz |       |           |       | PHASE: LINE (L) |       |        |        |
|----------|-------|----------------------|-------|-----------|-------|-----------------|-------|--------|--------|
| 輻射頻率     | 校正因子  | 儀器讀值                 |       | 結果值       |       | 限制值             |       | 餘裕度    |        |
| [MHz]    | [dB]  | [dB (uV)]            |       | [dB (uV)] |       | [dB (uV)]       |       | [dB]   |        |
|          |       | Q.P.                 | AV.   | Q.P.      | AV.   | Q.P.            | AV.   | Q.P.   | AV.    |
| 0.16565  | 10.15 | 31.96                | 17.93 | 42.11     | 28.08 | 65.18           | 55.18 | -23.07 | -27.10 |
| 0.29849  | 10.08 | 34.78                | 27.55 | 44.86     | 37.63 | 60.28           | 50.28 | -15.42 | -12.65 |
| 0.56033  | 10.12 | 17.83                | 12.66 | 27.95     | 22.78 | 56.00           | 46.00 | -28.05 | -23.22 |
| 0.83366  | 10.18 | 13.75                | 8.66  | 23.93     | 18.84 | 56.00           | 46.00 | -32.07 | -27.16 |
| 9.61723  | 10.47 | 15.33                | 9.69  | 25.80     | 20.16 | 60.00           | 50.00 | -34.20 | -29.84 |
| 21.45715 | 10.89 | 4.82                 | 3.03  | 15.71     | 13.92 | 60.00           | 50.00 | -44.29 | -36.08 |

### NOTE:

- 1.Q.P. and AV. are abbreviations of quasi-peak and average individually.
- 2.The emission levels of other frequencies were very low against the limit.
- 3.Margin value = Emission level - Limit value
- 4.Correction factor = Insertion loss + Cable loss
- 5.Emission Level = Correction Factor + Reading Value.

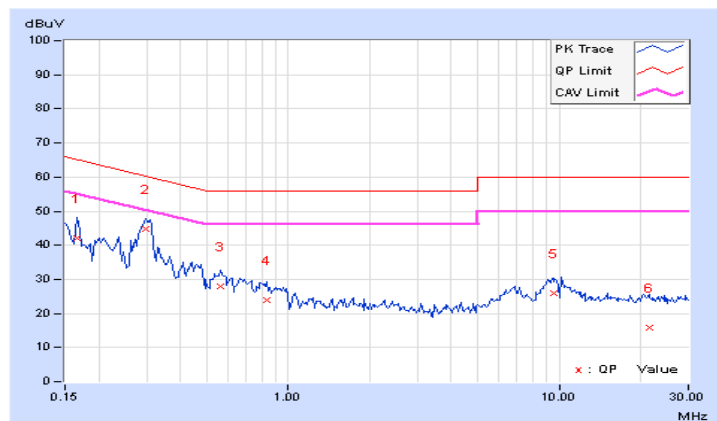


|       |                 |        |                 |
|-------|-----------------|--------|-----------------|
| 操作模式  | 發射              | 測試日期   | 105 年 11 月 16 日 |
| 基本波頻率 | Ch 110: 5550MHz | 量測場地溫度 | 26°C            |
| 調變技術  | OFDM            | 量測場地濕度 | 60%RH           |
| 測試者   | 李慶貫             | 測試模式   | —               |

|          |       | 6 dB Bandwidth: 9kHz |       |           |       | PHASE: NEUTRAL (N) |       |        |        |
|----------|-------|----------------------|-------|-----------|-------|--------------------|-------|--------|--------|
| 輻射頻率     | 校正因子  | 儀器讀值                 |       | 結果值       |       | 限制值                |       | 餘裕度    |        |
| [MHz]    | [dB]  | [dB (uV)]            |       | [dB (uV)] |       | [dB (uV)]          |       | [dB]   |        |
|          |       | Q.P.                 | AV.   | Q.P.      | AV.   | Q.P.               | AV.   | Q.P.   | AV.    |
| 0.16569  | 10.13 | 31.29                | 15.22 | 41.42     | 25.35 | 65.17              | 55.17 | -23.75 | -29.82 |
| 0.21255  | 10.12 | 27.66                | 16.45 | 37.78     | 26.57 | 63.11              | 53.11 | -25.33 | -26.54 |
| 0.48208  | 10.11 | 21.33                | 15.66 | 31.44     | 25.77 | 56.30              | 46.30 | -24.86 | -20.53 |
| 7.00001  | 10.37 | 23.53                | 18.99 | 33.90     | 29.36 | 60.00              | 50.00 | -26.10 | -20.64 |
| 13.51175 | 10.57 | 18.22                | 12.95 | 28.79     | 23.52 | 60.00              | 50.00 | -31.21 | -26.48 |
| 29.69928 | 11.16 | 19.22                | 14.33 | 30.38     | 25.49 | 60.00              | 50.00 | -29.62 | -24.51 |

NOTE:

- 1.Q.P. and AV. are abbreviations of quasi-peak and average individually.
- 2.The emission levels of other frequencies were very low against the limit.
- 3.Margin value = Emission level - Limit value
- 4.Correction factor = Insertion loss + Cable loss
- 5.Emission Level = Correction Factor + Reading Value.

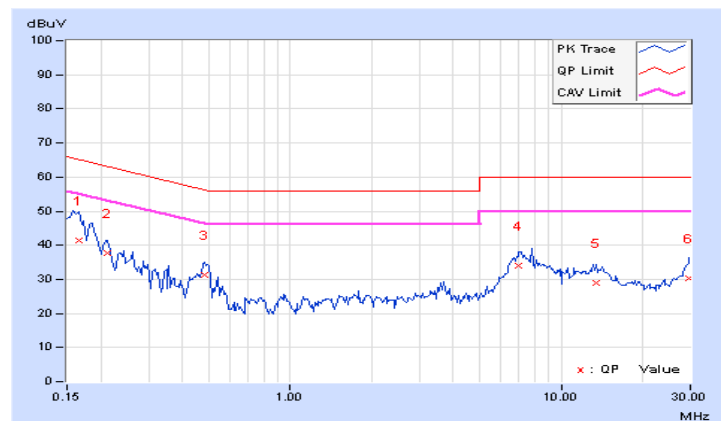


## 10.7 量測結果 (模式二)

|       |                 |        |                 |
|-------|-----------------|--------|-----------------|
| 操作模式  | 發射              | 測試日期   | 105 年 11 月 16 日 |
| 基本波頻率 | Ch 110: 5550MHz | 量測場地溫度 | 26°C            |
| 調變技術  | OFDM            | 量測場地濕度 | 60%RH           |
| 測試者   | 李慶貫             | 測試模式   | 二               |

|          |       | 6 dB Bandwidth: 9kHz |       |           |       | PHASE: LINE (L) |       |        |        |
|----------|-------|----------------------|-------|-----------|-------|-----------------|-------|--------|--------|
| 輻射頻率     | 校正因子  | 儀器讀值                 |       | 結果值       |       | 限制值             |       | 餘裕度    |        |
| [MHz]    | [dB]  | [dB (uV)]            |       | [dB (uV)] |       | [dB (uV)]       |       | [dB]   |        |
|          |       | Q.P.                 | AV.   | Q.P.      | AV.   | Q.P.            | AV.   | Q.P.   | AV.    |
| 0.16569  | 10.13 | 31.29                | 15.22 | 41.42     | 25.35 | 65.17           | 55.17 | -23.75 | -29.82 |
| 0.21255  | 10.12 | 27.66                | 16.45 | 37.78     | 26.57 | 63.11           | 53.11 | -25.33 | -26.54 |
| 0.48208  | 10.11 | 21.33                | 15.66 | 31.44     | 25.77 | 56.30           | 46.30 | -24.86 | -20.53 |
| 7.00001  | 10.37 | 23.53                | 18.99 | 33.90     | 29.36 | 60.00           | 50.00 | -26.10 | -20.64 |
| 13.51175 | 10.57 | 18.22                | 12.95 | 28.79     | 23.52 | 60.00           | 50.00 | -31.21 | -26.48 |
| 29.69928 | 11.16 | 19.22                | 14.33 | 30.38     | 25.49 | 60.00           | 50.00 | -29.62 | -24.51 |

### NOTE:

- 1.Q.P. and AV. are abbreviations of quasi-peak and average individually.
- 2.The emission levels of other frequencies were very low against the limit.
- 3.Margin value = Emission level - Limit value
- 4.Correction factor = Insertion loss + Cable loss
- 5.Emission Level = Correction Factor + Reading Value.

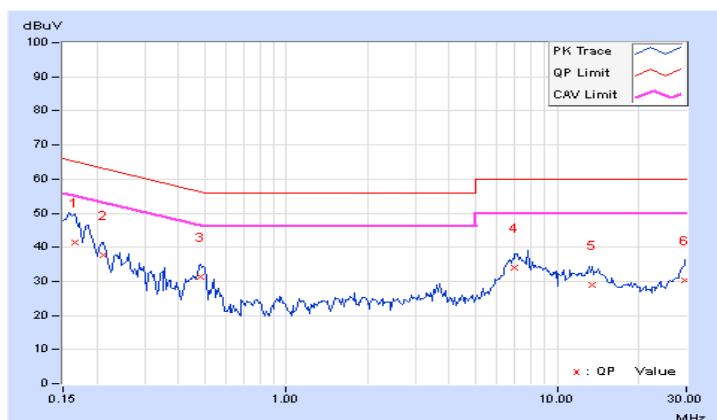


|       |                 |        |                 |
|-------|-----------------|--------|-----------------|
| 操作模式  | 發射              | 測試日期   | 105 年 11 月 16 日 |
| 基本波頻率 | Ch 110: 5550MHz | 量測場地溫度 | 26°C            |
| 調變技術  | OFDM            | 量測場地濕度 | 60%RH           |
| 測試者   | 李慶貫             | 測試模式   | 二               |

|          |       | 6 dB Bandwidth: 9kHz |       |           |       | PHASE: NEUTRAL (N) |       |        |        |
|----------|-------|----------------------|-------|-----------|-------|--------------------|-------|--------|--------|
| 輻射頻率     | 校正因子  | 儀器讀值                 |       | 結果值       |       | 限制值                |       | 餘裕度    |        |
| [MHz]    | [dB]  | [dB (uV)]            |       | [dB (uV)] |       | [dB (uV)]          |       | [dB]   |        |
|          |       | Q.P.                 | AV.   | Q.P.      | AV.   | Q.P.               | AV.   | Q.P.   | AV.    |
| 0.16175  | 10.16 | 36.89                | 25.47 | 47.05     | 35.63 | 65.37              | 55.37 | -18.32 | -19.74 |
| 0.29066  | 10.08 | 22.36                | 17.69 | 32.44     | 27.77 | 60.51              | 50.51 | -28.07 | -22.74 |
| 0.48205  | 10.11 | 22.69                | 18.92 | 32.80     | 29.03 | 56.30              | 46.30 | -23.50 | -17.27 |
| 1.48439  | 10.19 | 10.13                | 6.29  | 20.32     | 16.48 | 56.00              | 46.00 | -35.68 | -29.52 |
| 6.97269  | 10.40 | 23.66                | 19.16 | 34.06     | 29.56 | 60.00              | 50.00 | -25.94 | -20.44 |
| 13.58208 | 10.62 | 17.19                | 11.86 | 27.81     | 22.48 | 60.00              | 50.00 | -32.19 | -27.52 |

NOTE:

- 1.Q.P. and AV. are abbreviations of quasi-peak and average individually.
- 2.The emission levels of other frequencies were very low against the limit.
- 3.Margin value = Emission level - Limit value
- 4.Correction factor = Insertion loss + Cable loss
- 5.Emission Level = Correction Factor + Reading Value.

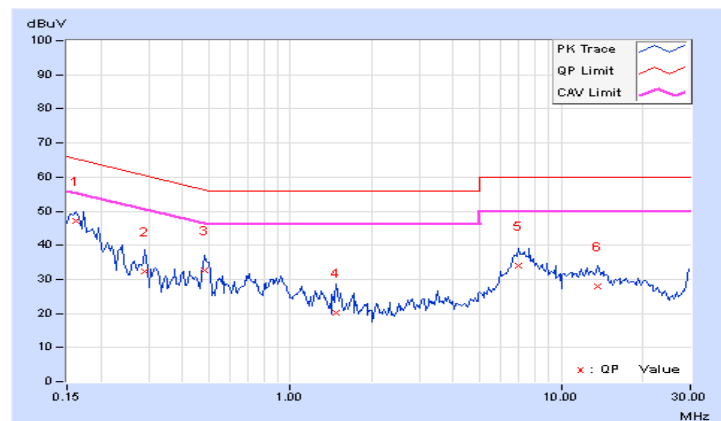

## 10.8 量測結果判定

依據測試數據結果，符合低功率射頻電機技術規範之要求。

## 10.9 配置照片

請參照 Test Setup Photos

## 11 傳導輸出功率量測及發射頻寬之要求

### 11.1 適用標準

| 待測物操作頻帶                                                 | 適用標準                               |
|---------------------------------------------------------|------------------------------------|
| <input checked="" type="checkbox"/> 5.15 GHz~5.25 GHz   | 請見本報告 3.1 節第 6 項(II)及 4 項(II)的規定   |
| <input checked="" type="checkbox"/> 5.25 GHz~5.35 GHz   | 請見本報告 3.1 節第 6 項(III)及 4 項(III)的規定 |
| <input checked="" type="checkbox"/> 5.470 GHz~5.725 GHz | 請見本報告 3.1 節第 6 項(III)及 4 項(III)的規定 |
| <input checked="" type="checkbox"/> 5.725 GHz~5.850 GHz | 請見本報告 3.1 節第 6 項(IV)及 4 項(IV)的規定   |

### 11.2 量測方法

傳導輸出功率量測方法：

- 將待測物輸出經由衰減器接到功率計上。
- 設定待測物處於連續發射狀態。
- 計算其最大傳導輸出功率。

發射頻寬量測方法：

- 將待測物輸出經由衰減器接到頻譜分析儀上。
- 設定待測物處於連續發射狀態。
- 最大輸出功率峰值減 26dB 的最大頻率範圍。

### 11.3 量測儀器

峰值傳導輸出功率量測儀器：

| DESCRIPTION & MANUFACTURER | MODEL NO. | SERIAL NO. | CALIBRATED DATE | CALIBRATED UNTIL |
|----------------------------|-----------|------------|-----------------|------------------|
| Power meter<br>Anritsu     | ML2495A   | 1014008    | May 11, 2017    | May 10, 2018     |
| Power sensor<br>Anritsu    | MA2411B   | 0917122    | May 11, 2017    | May 10, 2018     |

- NOTE:**
- The test was performed in Oven room 2.
  - The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

發射頻寬之量測儀器：

| DESCRIPTION & MANUFACTURER | MODEL NO. | SERIAL NO. | CALIBRATED DATE | CALIBRATED UNTIL |
|----------------------------|-----------|------------|-----------------|------------------|
| Spectrum Analyzer<br>R&S   | FSV40     | 100964     | July 1, 2017    | June 30, 2018    |

- NOTE:**
- The test was performed in Oven room 2.
  - The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

#### 11.4 測試配置

峰值傳導輸出功率測試配置:同 7.4 節

發射頻寬之測試配置: 同 6.4 節

### 11.5 峰值傳導輸出功率之量測結果

|        |      |        |                 |
|--------|------|--------|-----------------|
| 操作模式   | 發射   | 測試日期   | 106 年 10 月 27 日 |
| 量測場地溫度 | 25°C | 量測場地濕度 | 60%RH           |
| 測試者    | 鄭樹營  |        |                 |

#### For UNII-1, UNII-3

#### CDD Mode

##### 802.11a

| Chan. | Chan. Freq.<br>(MHz) | Maximum Conducted Power<br>(dBm) |         |         | Total<br>Power<br>(mW) | Total<br>Power<br>(dBm) | Limit (dBm) | Pass / Fail |
|-------|----------------------|----------------------------------|---------|---------|------------------------|-------------------------|-------------|-------------|
|       |                      | Chain 0                          | Chain 1 | Chain 2 |                        |                         |             |             |
| 36    | 5180                 | 19.12                            | 18.73   | 20.10   | 258.632                | 24.13                   | 30.00       | Pass        |
| 40    | 5200                 | 18.49                            | 17.89   | 19.60   | 223.351                | 23.49                   | 30.00       | Pass        |
| 48    | 5240                 | 21.80                            | 21.86   | 23.40   | 523.594                | 27.19                   | 30.00       | Pass        |
| 149   | 5745                 | 24.69                            | 24.69   | 24.82   | 892.273                | 29.50                   | 30.00       | Pass        |
| 157   | 5785                 | 24.68                            | 24.86   | 24.96   | 913.29                 | 29.61                   | 30.00       | Pass        |
| 165   | 5825                 | 24.69                            | 24.66   | 24.79   | 888.158                | 29.48                   | 30.00       | Pass        |

#### Beamforming Mode

##### 802.11ac (VHT20)

| Chan. | Chan. Freq.<br>(MHz) | Maximum Conducted Power<br>(dBm) |         |         | Total<br>Power<br>(mW) | Total<br>Power<br>(dBm) | Limit (dBm) | Pass / Fail |
|-------|----------------------|----------------------------------|---------|---------|------------------------|-------------------------|-------------|-------------|
|       |                      | Chain 0                          | Chain 1 | Chain 2 |                        |                         |             |             |
| 36    | 5180                 | 20.07                            | 19.77   | 21.21   | 328.597                | 25.17                   | 30.00       | Pass        |
| 40    | 5200                 | 18.55                            | 18.53   | 20.37   | 251.792                | 24.01                   | 30.00       | Pass        |
| 48    | 5240                 | 22.70                            | 22.52   | 23.39   | 583.131                | 27.66                   | 30.00       | Pass        |
| 149   | 5745                 | 24.65                            | 24.60   | 24.70   | 875.267                | 29.42                   | 30.00       | Pass        |
| 157   | 5785                 | 24.60                            | 24.76   | 24.90   | 896.659                | 29.53                   | 30.00       | Pass        |
| 165   | 5825                 | 24.59                            | 24.63   | 24.72   | 874.625                | 29.42                   | 30.00       | Pass        |

### 802.11ac (VHT40)

| Chan. | Chan. Freq.<br>(MHz) | Maximum Conducted Power<br>(dBm) |         |         | Total<br>Power<br>(mW) | Total<br>Power<br>(dBm) | Limit (dBm) | Pass / Fail |
|-------|----------------------|----------------------------------|---------|---------|------------------------|-------------------------|-------------|-------------|
|       |                      | Chain 0                          | Chain 1 | Chain 2 |                        |                         |             |             |
| 38    | 5190                 | 17.12                            | 16.69   | 17.91   | 159.991                | 22.04                   | 30.00       | Pass        |
| 46    | 5230                 | 21.59                            | 21.23   | 22.46   | 453.149                | 26.56                   | 30.00       | Pass        |
| 151   | 5755                 | 24.42                            | 24.22   | 24.38   | 815.092                | 29.11                   | 30.00       | Pass        |
| 159   | 5795                 | 24.53                            | 24.50   | 24.60   | 854.033                | 29.31                   | 30.00       | Pass        |

### 802.11ac (VHT80)

| Chan. | Chan. Freq.<br>(MHz) | Maximum Conducted Power<br>(dBm) |         |         | Total<br>Power<br>(mW) | Total<br>Power<br>(dBm) | Limit (dBm) | Pass / Fail |
|-------|----------------------|----------------------------------|---------|---------|------------------------|-------------------------|-------------|-------------|
|       |                      | Chain 0                          | Chain 1 | Chain 2 |                        |                         |             |             |
| 42    | 5210                 | 17.07                            | 17.68   | 16.70   | 156.321                | 21.94                   | 30.00       | Pass        |
| 155   | 5775                 | 21.75                            | 21.99   | 22.35   | 479.54                 | 26.81                   | 30.00       | Pass        |

**For UNII-2A, UNII-2C**

**CDD Mode**

**802.11a**

**Power Output:**

| Chan. | Chan. Freq.<br>(MHz) | Maximum Conducted Power<br>(dBm) |         |         | Total<br>Power<br>(mW) | Total<br>Power<br>(dBm) | Limit (dBm) | Pass / Fail |
|-------|----------------------|----------------------------------|---------|---------|------------------------|-------------------------|-------------|-------------|
|       |                      | Chain 0                          | Chain 1 | Chain 2 |                        |                         |             |             |
| 52    | 5260                 | 18.34                            | 18.39   | 18.90   | 214.883                | 23.32                   | 24.00       | Pass        |
| 60    | 5300                 | 18.37                            | 18.36   | 18.76   | 212.418                | 23.27                   | 24.00       | Pass        |
| 64    | 5320                 | 18.41                            | 18.33   | 18.62   | 210.198                | 23.23                   | 24.00       | Pass        |
| 100   | 5500                 | 18.35                            | 18.36   | 18.64   | 210.054                | 23.22                   | 24.00       | Pass        |
| 116   | 5580                 | 18.22                            | 18.70   | 18.45   | 210.489                | 23.23                   | 24.00       | Pass        |
| 140   | 5700                 | 18.32                            | 18.69   | 18.33   | 209.958                | 23.22                   | 24.00       | Pass        |

**26dB OCCUPIED BANDWIDTH**

| Channel | Frequency (MHz) | 26dBc Bandwidth (MHz) |         |         |
|---------|-----------------|-----------------------|---------|---------|
|         |                 | Chain 0               | Chain 1 | Chain 2 |
| 52      | 5260            | 20.55                 | 20.42   | 20.18   |
| 60      | 5300            | 20.72                 | 20.46   | 20.44   |
| 64      | 5320            | 20.80                 | 20.45   | 20.54   |
| 100     | 5500            | 20.53                 | 20.49   | 20.33   |
| 120     | 5600            | 20.48                 | 20.48   | 20.39   |
| 140     | 5700            | 20.45                 | 20.88   | 20.42   |

**Note: For U-NII-2A, U-NII-2C Band output power limitation is determined based on 26dBc bandwidth**

| Power Limit = 11dBm + 10logB < U-NII-2A, U-NII-2C > |            |             |                                     |
|-----------------------------------------------------|------------|-------------|-------------------------------------|
| Channel Number                                      | Freq.(MHz) | Min. B(MHz) | Determined Conducted Limit<br>(dBm) |
| 52                                                  | 5260       | 20.18       | 24.04 > 24                          |
| 60                                                  | 5300       | 20.44       | 24.1 > 24                           |
| 64                                                  | 5320       | 20.45       | 24.1 > 24                           |
| 100                                                 | 5500       | 20.33       | 24.08 > 24                          |
| 120                                                 | 5600       | 20.39       | 24.09 > 24                          |
| 140                                                 | 5700       | 20.42       | 24.1 > 24                           |

## Beamforming Mode

### 802.11ac (VHT20)

| Chan. | Chan. Freq. (MHz) | Maximum Conducted Power (dBm) |         |         | Total Power (mW) | Total Power (dBm) | Limit (dBm) | Pass / Fail |
|-------|-------------------|-------------------------------|---------|---------|------------------|-------------------|-------------|-------------|
|       |                   | Chain 0                       | Chain 1 | Chain 2 |                  |                   |             |             |
| 52    | 5260              | 18.33                         | 18.38   | 18.93   | 215.105          | 23.33             | 24.00       | Pass        |
| 60    | 5300              | 18.38                         | 18.36   | 18.77   | 212.75           | 23.28             | 24.00       | Pass        |
| 64    | 5320              | 18.39                         | 18.32   | 18.65   | 210.226          | 23.23             | 24.00       | Pass        |
| 100   | 5500              | 18.28                         | 18.46   | 18.66   | 210.895          | 23.24             | 24.00       | Pass        |
| 116   | 5580              | 18.28                         | 18.69   | 18.52   | 212.38           | 23.27             | 24.00       | Pass        |
| 140   | 5700              | 18.40                         | 18.66   | 18.32   | 210.554          | 23.23             | 24.00       | Pass        |

### 26dB OCCUPIED BANDWIDTH

| Channel | Frequency (MHz) | 26dBc Bandwidth (MHz) |         |         |
|---------|-----------------|-----------------------|---------|---------|
|         |                 | Chain 0               | Chain 1 | Chain 2 |
| 52      | 5260            | 22.25                 | 20.49   | 21.40   |
| 60      | 5300            | 22.07                 | 20.76   | 20.80   |
| 64      | 5320            | 21.17                 | 20.74   | 20.73   |
| 100     | 5500            | 20.84                 | 20.69   | 20.68   |
| 120     | 5600            | 20.90                 | 20.76   | 20.94   |
| 140     | 5700            | 22.24                 | 21.92   | 20.58   |

**Note: For U-NII-2A, U-NII-2C Band output power limitation is determined based on 26dBc bandwidth**

| Power Limit = 11dBm + 10logB < U-NII-2A, U-NII-2C > |            |             |                                  |
|-----------------------------------------------------|------------|-------------|----------------------------------|
| Channel Number                                      | Freq.(MHz) | Min. B(MHz) | Determined Conducted Limit (dBm) |
| 52                                                  | 5260       | 20.49       | 24.11 > 24                       |
| 60                                                  | 5300       | 20.76       | 24.17 > 24                       |
| 64                                                  | 5320       | 20.73       | 24.16 > 24                       |
| 100                                                 | 5500       | 20.68       | 24.15 > 24                       |
| 120                                                 | 5600       | 20.76       | 24.17 > 24                       |
| 140                                                 | 5700       | 20.58       | 24.13 > 24                       |

### 802.11ac (VHT40)

| Chan. | Chan. Freq. (MHz) | Maximum Conducted Power (dBm) |         |         | Total Power (mW) | Total Power (dBm) | Limit (dBm) | Pass / Fail |
|-------|-------------------|-------------------------------|---------|---------|------------------|-------------------|-------------|-------------|
|       |                   | Chain 0                       | Chain 1 | Chain 2 |                  |                   |             |             |
| 54    | 5270              | 18.22                         | 18.11   | 18.84   | 207.648          | 23.17             | 24.00       | Pass        |
| 62    | 5310              | 17.77                         | 17.75   | 18.23   | 185.934          | 22.69             | 24.00       | Pass        |
| 102   | 5510              | 16.92                         | 17.33   | 17.44   | 158.742          | 22.01             | 24.00       | Pass        |
| 110   | 5550              | 18.33                         | 18.98   | 18.89   | 224.591          | 23.51             | 24.00       | Pass        |
| 134   | 5670              | 18.54                         | 18.83   | 18.36   | 216.383          | 23.35             | 24.00       | Pass        |

### 26dB OCCUPIED BANDWIDTH

| Channel | Frequency (MHz) | 26dBc Bandwidth (MHz) |         |         |
|---------|-----------------|-----------------------|---------|---------|
|         |                 | Chain 0               | Chain 1 | Chain 2 |
| 54      | 5270            | 43.25                 | 42.24   | 41.19   |
| 62      | 5310            | 41.32                 | 41.30   | 40.76   |
| 102     | 5510            | 41.49                 | 41.36   | 41.27   |
| 118     | 5590            | 41.75                 | 41.18   | 41.85   |
| 134     | 5670            | 53.39                 | 60.08   | 45.93   |

**Note: For U-NII-2A, U-NII-2C Band output power limitation is determined based on 26dBc bandwidth**

| Power Limit = 11dBm + 10logB < U-NII-2A, U-NII-2C > |            |             |                                  |
|-----------------------------------------------------|------------|-------------|----------------------------------|
| Channel Number                                      | Freq.(MHz) | Min. B(MHz) | Determined Conducted Limit (dBm) |
| 54                                                  | 5270       | 41.19       | 27.14 > 24                       |
| 62                                                  | 5310       | 40.76       | 27.1 > 24                        |
| 102                                                 | 5510       | 41.27       | 27.15 > 24                       |
| 118                                                 | 5590       | 41.18       | 27.14 > 24                       |
| 134                                                 | 5670       | 45.93       | 27.62 > 24                       |

### 802.11ac (VHT80)

| Chan. | Chan. Freq. (MHz) | Maximum Conducted Power (dBm) |         |         | Total Power (mW) | Total Power (dBm) | Limit (dBm) | Pass / Fail |
|-------|-------------------|-------------------------------|---------|---------|------------------|-------------------|-------------|-------------|
|       |                   | Chain 0                       | Chain 1 | Chain 2 |                  |                   |             |             |
| 58    | 5290              | 17.71                         | 17.93   | 17.83   | 181.781          | 22.60             | 24.00       | Pass        |
| 106   | 5530              | 17.51                         | 17.91   | 17.80   | 178.422          | 22.51             | 24.00       | Pass        |
| 122   | 5610              | 18.22                         | 18.80   | 18.44   | 212.055          | 23.26             | 24.00       | Pass        |


### 26dB OCCUPIED BANDWIDTH

| Channel | Frequency (MHz) | 26dBc Bandwidth (MHz) |         |         |
|---------|-----------------|-----------------------|---------|---------|
|         |                 | Chain 0               | Chain 1 | Chain 2 |
| 58      | 5290            | 83.22                 | 82.70   | 82.18   |
| 106     | 5530            | 82.77                 | 82.54   | 81.97   |
| 122     | 5610            | 83.76                 | 86.99   | 83.02   |

**Note: For U-NII-2A, U-NII-2C Band output power limitation is determined based on 26dBc bandwidth**

| Power Limit = 11dBm + 10logB < U-NII-2A, U-NII-2C > |            |             |                                  |
|-----------------------------------------------------|------------|-------------|----------------------------------|
| Channel Number                                      | Freq.(MHz) | Min. B(MHz) | Determined Conducted Limit (dBm) |
| 58                                                  | 5290       | 82.18       | 30.14 > 24                       |
| 106                                                 | 5530       | 81.97       | 30.13 > 24                       |
| 122                                                 | 5610       | 83.02       | 30.19 > 24                       |

\*\*此測試圖僅放測試結果最差的頻道。

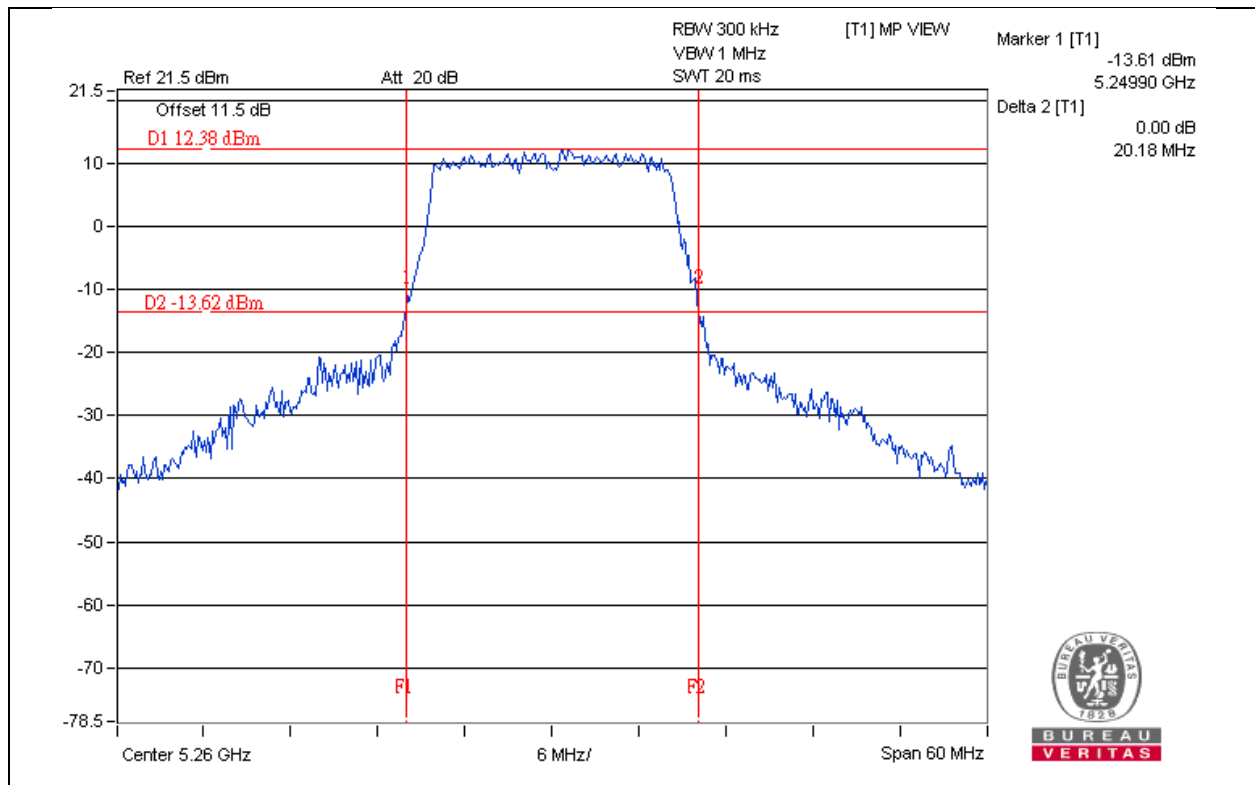

## 11.6 量測結果判定

依據測試數據結果，符合低功率射頻電機技術規範之要求。

## 12 功率頻譜密度之量測

### 12.1 適用標準

|                                     | 待測物操作頻帶             | 適用標準                               |
|-------------------------------------|---------------------|------------------------------------|
| <input checked="" type="checkbox"/> | 5.15 GHz~5.25 GHz   | 請見本報告 3.1 節第 7 項(II)及 4 項(II)的規定   |
| <input checked="" type="checkbox"/> | 5.25 GHz~5.35 GHz   | 請見本報告 3.1 節第 7 項(III)及 4 項(III)的規定 |
| <input checked="" type="checkbox"/> | 5.470 GHz~5.725 GHz | 請見本報告 3.1 節第 7 項(III)及 4 項(III)的規定 |
| <input checked="" type="checkbox"/> | 5.725 GHz~5.850 GHz | 請見本報告 3.1 節第 7 項(IV)及 4 項(IV)的規定   |

### 12.2 量測方法

|                                     | 待測物操作頻帶             | KDB 789033 D02 量測方法                                                                                                                                                                                                                                 | KDB 662911 D01 量測方法                                                                                                                      |
|-------------------------------------|---------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------|
| <input checked="" type="checkbox"/> | 5.15 GHz~5.25 GHz   | <input checked="" type="checkbox"/> SA-1 <input type="checkbox"/> SA-1 alternative<br><input checked="" type="checkbox"/> SA-2 <input type="checkbox"/> SA-2 alternative<br><input type="checkbox"/> SA-3 <input type="checkbox"/> SA-3 alternative | <input checked="" type="checkbox"/> Section E)2)a)<br><input type="checkbox"/> Section E)2)b)<br><input type="checkbox"/> Section E)2)c) |
| <input checked="" type="checkbox"/> | 5.25 GHz~5.35 GHz   | <input checked="" type="checkbox"/> SA-1 <input type="checkbox"/> SA-1 alternative<br><input checked="" type="checkbox"/> SA-2 <input type="checkbox"/> SA-2 alternative<br><input type="checkbox"/> SA-3 <input type="checkbox"/> SA-3 alternative | <input checked="" type="checkbox"/> Section E)2)a)<br><input type="checkbox"/> Section E)2)b)<br><input type="checkbox"/> Section E)2)c) |
| <input checked="" type="checkbox"/> | 5.470 GHz~5.725 GHz | <input checked="" type="checkbox"/> SA-1 <input type="checkbox"/> SA-1 alternative<br><input checked="" type="checkbox"/> SA-2 <input type="checkbox"/> SA-2 alternative<br><input type="checkbox"/> SA-3 <input type="checkbox"/> SA-3 alternative | <input checked="" type="checkbox"/> Section E)2)a)<br><input type="checkbox"/> Section E)2)b)<br><input type="checkbox"/> Section E)2)c) |
| <input checked="" type="checkbox"/> | 5.725 GHz~5.850 GHz | <input checked="" type="checkbox"/> SA-1 <input type="checkbox"/> SA-1 alternative<br><input checked="" type="checkbox"/> SA-2 <input type="checkbox"/> SA-2 alternative<br><input type="checkbox"/> SA-3 <input type="checkbox"/> SA-3 alternative | <input type="checkbox"/> Section E)2)a)<br><input type="checkbox"/> Section E)2)b)<br><input checked="" type="checkbox"/> Section E)2)c) |

### 802.11a, 802.11ac (VHT20), 802.11ac (VHT40)

#### For U-NII-1~2C:

Using method SA-1

1. Set span to encompass the entire emission bandwidth (EBW) of the signal.
2. Set RBW = 1 MHz, Set VBW  $\geq$  3 MHz, Detector = RMS
3. Sweep time = auto, trigger set to "free run".
4. Trace average at least 100 traces in power averaging mode.
5. Record the max value

#### For U-NII-3:

1. Set span to encompass the entire emission bandwidth (EBW) of the signal.
2. Set RBW = 300 kHz, Set VBW  $\geq$  1 MHz, Detector = RMS
3. Use the peak marker function to determine the maximum power level in any 300 kHz band segment within the fundamental EBW.
4. Scale the observed power level to an equivalent value in 500 kHz by adjusting (reducing) the measured power by a bandwidth correction factor (BWCF) where  $BWCF = 10\log(500 \text{ kHz}/300\text{kHz})$
5. Sweep time = auto, trigger set to "free run".
6. Trace average at least 100 traces in power averaging mode.
7. Record the max value

### 802.11ac (VHT80)

#### For U-NII-1~2C:

Using method SA-2

1. Set span to encompass the entire emission bandwidth (EBW) of the signal.
2. Set RBW = 1 MHz, Set VBW  $\geq$  3 MHz, Detector = RMS
3. Sweep time = auto, trigger set to "free run".
4. Trace average at least 100 traces in power averaging mode.
5. Record the max value and add  $10 \log (1/\text{duty cycle})$

#### For U-NII-3:

1. Set span to encompass the entire emission bandwidth (EBW) of the signal.
2. Set RBW = 300 kHz, Set VBW  $\geq$  1 MHz, Detector = RMS
3. Use the peak marker function to determine the maximum power level in any 300 kHz band segment within the fundamental EBW.
4. Scale the observed power level to an equivalent value in 500 kHz by adjusting (reducing) the measured power by a bandwidth correction factor (BWCF) where  $BWCF = 10\log(500 \text{ kHz}/300\text{kHz})$
5. Sweep time = auto, trigger set to "free run".
6. Trace average at least 100 traces in power averaging mode.
7. Record the max value and add  $10 \log (1/\text{duty cycle})$

### 12.3 量測功率頻譜密度之儀器

#### For UNII-1 & UNII-3:

| DESCRIPTION & MANUFACTURER | MODEL NO. | SERIAL NO. | CALIBRATED DATE | CALIBRATED UNTIL |
|----------------------------|-----------|------------|-----------------|------------------|
| Spectrum Analyzer R&S      | FSP40     | 100060     | May 11, 2016    | May 10, 2017     |

- NOTE:**
1. The test was performed in Oven room 2.
  2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

#### For UNII-2A & UNII-2C:

| DESCRIPTION & MANUFACTURER | MODEL NO. | SERIAL NO. | CALIBRATED DATE | CALIBRATED UNTIL |
|----------------------------|-----------|------------|-----------------|------------------|
| Spectrum Analyzer R&S      | FSV40     | 100964     | June 28, 2016   | June 27, 2017    |

- NOTE:**
1. The test was performed in Oven room 2.
  2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

### 12.4 功率頻譜密度之測試配置

同 9.4 節

## 12.5 功率頻譜密度之量測結果

### For U-NII-1 & UNII-3:

|        |      |        |                 |
|--------|------|--------|-----------------|
| 操作模式   | 發射   | 測試日期   | 105 年 10 月 08 日 |
| 量測場地溫度 | 25°C | 量測場地濕度 | 60%RH           |
| 測試者    | 鄭又瑋  |        |                 |

### For U-NII-1:

#### CDD Mode

#### 802.11a

| Chan. | Chan. Freq.<br>(MHz) | PSD (dBm/MHz) |         |         | Total Power<br>Density<br>(dBm/MHz) | MAX. Limit<br>(dBm/MHz) | Pass / Fail |
|-------|----------------------|---------------|---------|---------|-------------------------------------|-------------------------|-------------|
|       |                      | Chain 0       | Chain 1 | Chain 2 |                                     |                         |             |
| 36    | 5180                 | 6.24          | 5.42    | 8.08    | 11.50                               | 17.00                   | Pass        |
| 40    | 5200                 | 5.40          | 4.96    | 7.40    | 10.83                               | 17.00                   | Pass        |
| 48    | 5240                 | 10.14         | 10.15   | 12.14   | 15.69                               | 17.00                   | Pass        |

- Note:** 1. Method a) of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
2. Directional gain = 5.95dBi < 6dBi, so the power density limit shall not be reduced.

#### Beamforming Mode

#### 802.11ac (VHT20)

| Chan. | Chan. Freq.<br>(MHz) | PSD (dBm/MHz) |         |         | Total Power<br>Density<br>(dBm/MHz) | MAX. Limit<br>(dBm/MHz) | Pass / Fail |
|-------|----------------------|---------------|---------|---------|-------------------------------------|-------------------------|-------------|
|       |                      | Chain 0       | Chain 1 | Chain 2 |                                     |                         |             |
| 36    | 5180                 | 6.84          | 6.74    | 8.46    | 12.19                               | 17.00                   | Pass        |
| 40    | 5200                 | 6.06          | 6.23    | 7.62    | 11.47                               | 17.00                   | Pass        |
| 48    | 5240                 | 9.98          | 10.24   | 11.45   | 15.38                               | 17.00                   | Pass        |

- Note:** 1. Method a) of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
2. Directional gain = 5.95dBi < 6dBi, so the power density limit shall not be reduced.

### 802.11ac (VHT40)

| Chan. | Chan. Freq.<br>(MHz) | PSD (dBm/MHz) |         |         | Total Power<br>Density<br>(dBm/MHz) | MAX. Limit<br>(dBm/MHz) | Pass / Fail |
|-------|----------------------|---------------|---------|---------|-------------------------------------|-------------------------|-------------|
|       |                      | Chain 0       | Chain 1 | Chain 2 |                                     |                         |             |
| 38    | 5190                 | 1.16          | 0.44    | 2.90    | 6.40                                | 17.00                   | Pass        |
| 46    | 5230                 | 5.73          | 5.64    | 7.78    | 11.27                               | 17.00                   | Pass        |


- Note:** 1. Method a) of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
2. Directional gain = 5.95dBi < 6dBi, so the power density limit shall not be reduced.

### 802.11ac (VHT80)

| Chan. | Chan. Freq.<br>(MHz) | PSD W/O Duty Factor (dBm/MHz) |         |         | Duty<br>Factor<br>(dB) | Total PSD With<br>Duty Factor<br>(dBm/MHz) | MAX. Limit<br>(dBm/MHz) | Pass / Fail |
|-------|----------------------|-------------------------------|---------|---------|------------------------|--------------------------------------------|-------------------------|-------------|
|       |                      | Chain 0                       | Chain 1 | Chain 2 |                        |                                            |                         |             |
| 42    | 5210                 | -1.60                         | -2.45   | -1.81   | 0.17                   | 3.00                                       | 17.00                   | Pass        |

- Note:** 1. Method a) of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
2. Directional gain = 5.95dBi < 6dBi, so the power density limit shall not be reduced.
3. Refer to section 2.1 for duty cycle spectrum plot

\*\*此測試圖僅放測試結果最差的頻道。

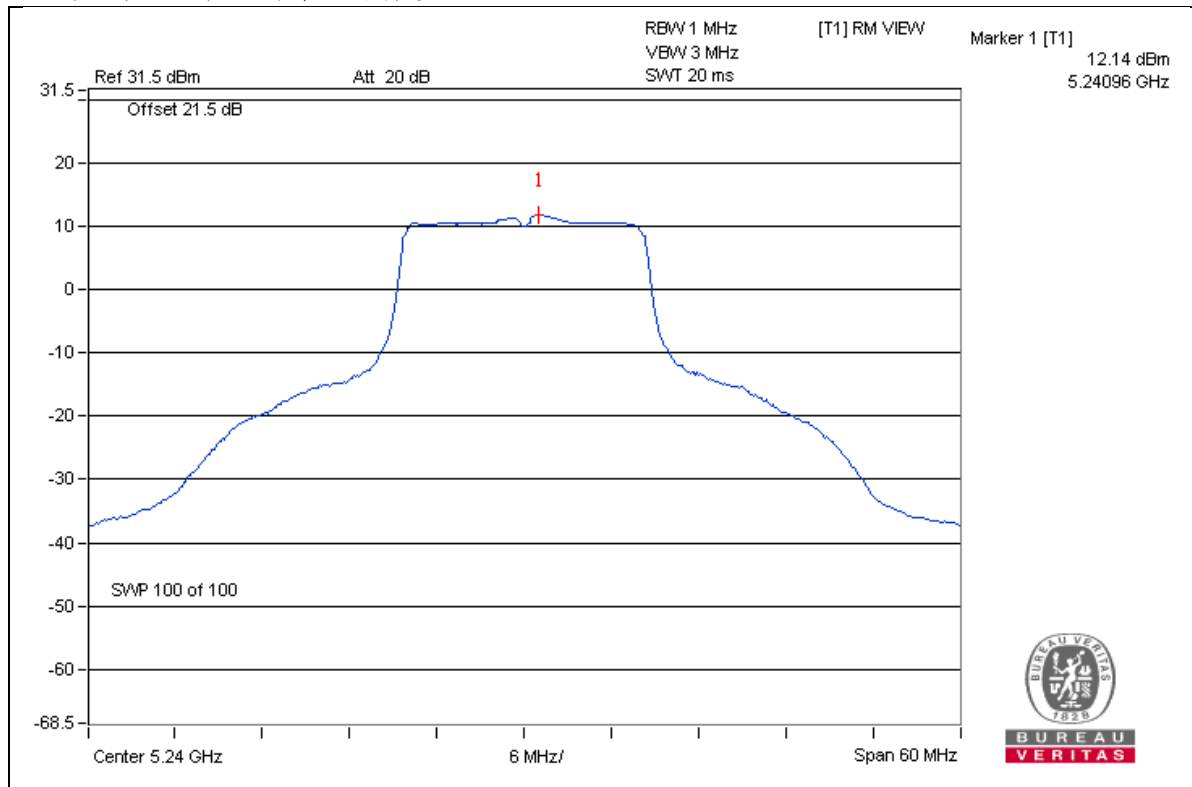

### For U-NII-3:

#### CDD Mode

##### 802.11a

| TX chain | Channel | Freq. (MHz) | PSD (dBm/300kHz) | PSD (dBm/500kHz) | 10 log (N=3) dB | Total PSD (dBm/500kHz) | Limit (dBm/500kHz) | Pass /Fail |
|----------|---------|-------------|------------------|------------------|-----------------|------------------------|--------------------|------------|
| 0        | 149     | 5745        | 3.60             | 5.82             | 4.77            | 10.59                  | 30.00              | Pass       |
|          | 157     | 5785        | 3.46             | 5.68             | 4.77            | 10.45                  | 30.00              | Pass       |
|          | 165     | 5825        | 3.17             | 5.39             | 4.77            | 10.16                  | 30.00              | Pass       |
| 1        | 149     | 5745        | 4.25             | 6.47             | 4.77            | 11.24                  | 30.00              | Pass       |
|          | 157     | 5785        | 4.13             | 6.35             | 4.77            | 11.12                  | 30.00              | Pass       |
|          | 165     | 5825        | 4.00             | 6.22             | 4.77            | 10.99                  | 30.00              | Pass       |
| 2        | 149     | 5745        | 4.37             | 6.59             | 4.77            | 11.36                  | 30.00              | Pass       |
|          | 157     | 5785        | 4.24             | 6.46             | 4.77            | 11.23                  | 30.00              | Pass       |
|          | 165     | 5825        | 3.81             | 6.03             | 4.77            | 10.80                  | 30.00              | Pass       |

Note: 1. Directional gain = 5.98dBi < 6dBi, so the power density limit shall not be reduced.

#### Beamforming Mode

##### 802.11ac (VHT20)

| TX chain | Channel | Freq. (MHz) | PSD (dBm/300kHz) | PSD (dBm/500kHz) | 10 log (N=3) dB | Total PSD (dBm/500kHz) | Limit (dBm/500kHz) | Pass /Fail |
|----------|---------|-------------|------------------|------------------|-----------------|------------------------|--------------------|------------|
| 0        | 149     | 5745        | 3.53             | 5.75             | 4.77            | 10.52                  | 30.00              | Pass       |
|          | 157     | 5785        | 3.14             | 5.36             | 4.77            | 10.13                  | 30.00              | Pass       |
|          | 165     | 5825        | 2.86             | 5.08             | 4.77            | 9.85                   | 30.00              | Pass       |
| 1        | 149     | 5745        | 3.76             | 5.98             | 4.77            | 10.75                  | 30.00              | Pass       |
|          | 157     | 5785        | 3.42             | 5.64             | 4.77            | 10.41                  | 30.00              | Pass       |
|          | 165     | 5825        | 3.31             | 5.53             | 4.77            | 10.30                  | 30.00              | Pass       |
| 2        | 149     | 5745        | 3.95             | 6.17             | 4.77            | 10.94                  | 30.00              | Pass       |
|          | 157     | 5785        | 3.96             | 6.18             | 4.77            | 10.95                  | 30.00              | Pass       |
|          | 165     | 5825        | 3.46             | 5.68             | 4.77            | 10.45                  | 30.00              | Pass       |

Note: 1. Directional gain = 5.98dBi < 6dBi, so the power density limit shall not be reduced.

##### 802.11ac (VHT40)

| TX chain | Channel | Freq. (MHz) | PSD (dBm/300kHz) | PSD (dBm/500kHz) | 10 log (N=3) dB | Total PSD (dBm/500kHz) | Limit (dBm/500kHz) | Pass /Fail |
|----------|---------|-------------|------------------|------------------|-----------------|------------------------|--------------------|------------|
| 0        | 151     | 5755        | -0.07            | 2.15             | 4.77            | 6.92                   | 30.00              | Pass       |
|          | 159     | 5795        | -0.20            | 2.02             | 4.77            | 6.79                   | 30.00              | Pass       |
| 1        | 151     | 5755        | 0.32             | 2.54             | 4.77            | 7.31                   | 30.00              | Pass       |
|          | 159     | 5795        | 0.58             | 2.80             | 4.77            | 7.57                   | 30.00              | Pass       |
| 2        | 151     | 5755        | 0.38             | 2.60             | 4.77            | 7.37                   | 30.00              | Pass       |
|          | 159     | 5795        | 0.69             | 2.91             | 4.77            | 7.68                   | 30.00              | Pass       |


Note: 1. Directional gain = 5.98dBi < 6dBi, so the power density limit shall not be reduced.

### 802.11ac (VHT80)

| TX chain | Chan. | Chan. Freq. (MHz) | PSD W/O Duty Factor |              | 10 log (N=3) dB | Duty Factor (dB) | Total PSD With Duty Factor (dBm/500kHz) | Limit (dBm/500kHz) | Pass /Fail |
|----------|-------|-------------------|---------------------|--------------|-----------------|------------------|-----------------------------------------|--------------------|------------|
|          |       |                   | (dBm/300kHz)        | (dBm/500kHz) |                 |                  |                                         |                    |            |
| 0        | 155   | 5775              | -6.21               | -3.99        | 4.77            | 0.17             | 0.95                                    | 30.00              | Pass       |
| 1        | 155   | 5775              | -5.42               | -3.20        | 4.77            | 0.17             | 1.74                                    | 30.00              | Pass       |
| 2        | 155   | 5775              | -5.65               | -3.43        | 4.77            | 0.17             | 1.51                                    | 30.00              | Pass       |

Note: 1. Directional gain = 5.98dBi < 6dBi, so the power density limit shall not be reduced.  
2. Refer to section 3.3 for duty cycle spectrum plot.

\*\*此測試圖僅放測試結果最差的頻道。

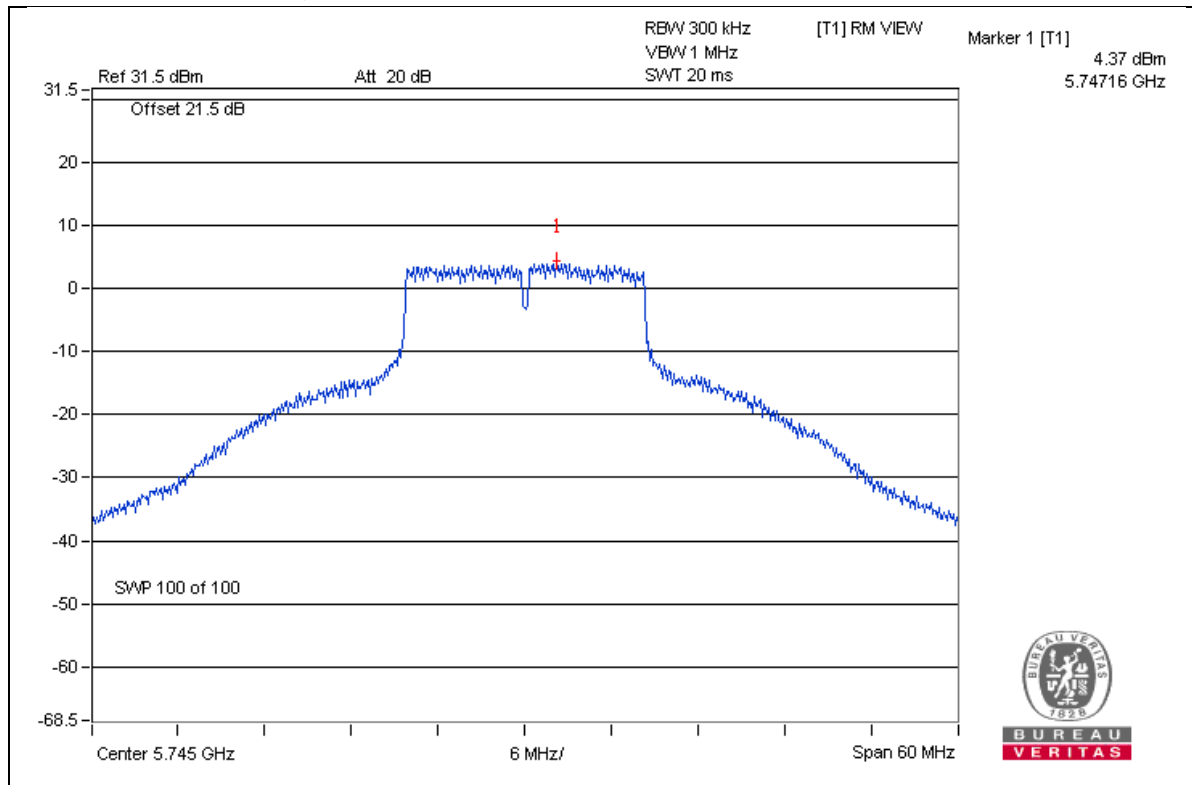

### For U-NII-2A & UNII-2C:

|        |      |        |                 |
|--------|------|--------|-----------------|
| 操作模式   | 發射   | 測試日期   | 105 年 11 月 16 日 |
| 量測場地溫度 | 24°C | 量測場地濕度 | 62%RH           |
| 測試者    | 林俊鈞  |        |                 |

### CDD Mode

#### 802.11a

| Chan. | Chan. Freq.<br>(MHz) | PSD (dBm/MHz) |         |         | Total Power<br>Density<br>(dBm/MHz) | MAX. Limit<br>(dBm/MHz) | Pass / Fail |
|-------|----------------------|---------------|---------|---------|-------------------------------------|-------------------------|-------------|
|       |                      | Chain 0       | Chain 1 | Chain 2 |                                     |                         |             |
| 52    | 5260                 | 6.50          | 4.93    | 6.46    | 10.79                               | 11.00                   | Pass        |
| 60    | 5300                 | 5.76          | 5.28    | 6.72    | 10.73                               | 11.00                   | Pass        |
| 64    | 5320                 | 5.70          | 5.68    | 6.70    | 10.82                               | 11.00                   | Pass        |
| 100   | 5500                 | 6.17          | 5.83    | 6.02    | 10.78                               | 11.00                   | Pass        |
| 120   | 5600                 | 6.55          | 6.47    | 5.54    | 10.98                               | 11.00                   | Pass        |
| 140   | 5700                 | 6.28          | 6.09    | 5.40    | 10.71                               | 11.00                   | Pass        |

- Note:** 1. Method a) of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
2. For UNII-2A: Directional gain = 5.95dBi < 6dBi, so the power density limit shall not be reduced.
3. For UNII-2C: Directional gain = 5.98dBi < 6dBi, so the power density limit shall not be reduced.

### Beamforming Mode

#### 802.11ac (VHT20)

| Chan. | Chan. Freq.<br>(MHz) | PSD (dBm/MHz) |         |         | Total Power<br>Density<br>(dBm/MHz) | MAX. Limit<br>(dBm/MHz) | Pass / Fail |
|-------|----------------------|---------------|---------|---------|-------------------------------------|-------------------------|-------------|
|       |                      | Chain 0       | Chain 1 | Chain 2 |                                     |                         |             |
| 52    | 5260                 | 5.62          | 6.18    | 6.30    | 10.81                               | 11.00                   | Pass        |
| 60    | 5300                 | 5.17          | 6.05    | 7.17    | 10.98                               | 11.00                   | Pass        |
| 64    | 5320                 | 5.11          | 5.51    | 7.25    | 10.83                               | 11.00                   | Pass        |
| 100   | 5500                 | 5.87          | 6.03    | 6.67    | 10.98                               | 11.00                   | Pass        |
| 120   | 5600                 | 5.73          | 6.54    | 6.23    | 10.95                               | 11.00                   | Pass        |
| 140   | 5700                 | 5.99          | 6.59    | 5.80    | 10.91                               | 11.00                   | Pass        |

- Note:** 1. Method a) of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
2. For UNII-2A: Directional gain = 5.95dBi < 6dBi, so the power density limit shall not be reduced.
3. For UNII-2C: Directional gain = 5.98dBi < 6dBi, so the power density limit shall not be reduced.

#### 802.11ac (VHT40)

| Chan. | Chan. Freq. (MHz) | PSD (dBm/MHz) |         |         | Total Power Density (dBm/MHz) | MAX. Limit (dBm/MHz) | Pass / Fail |
|-------|-------------------|---------------|---------|---------|-------------------------------|----------------------|-------------|
|       |                   | Chain 0       | Chain 1 | Chain 2 |                               |                      |             |
| 54    | 5270              | 3.11          | 2.87    | 4.21    | 8.21                          | 11.00                | Pass        |
| 62    | 5310              | 2.43          | 2.51    | 4.09    | 7.85                          | 11.00                | Pass        |
| 102   | 5510              | 2.11          | 2.40    | 1.10    | 6.68                          | 11.00                | Pass        |
| 118   | 5590              | 2.99          | 3.56    | 4.19    | 8.38                          | 11.00                | Pass        |
| 134   | 5670              | 3.47          | 3.79    | 2.36    | 8.02                          | 11.00                | Pass        |

**Note:** 1. Method a) of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.

2. For UNII-2A: Directional gain = 5.95dBi < 6dBi, so the power density limit shall not be reduced.

3. For UNII-2C: Directional gain = 5.98dBi < 6dBi, so the power density limit shall not be reduced.

#### 802.11ac (VHT80)

| Chan. | Chan. Freq. (MHz) | PSD W/O Duty Factor (dBm/MHz) |         |         | Duty Factor (dB) | Total PSD With Duty Factor (dBm/MHz) | MAX. Limit (dBm/MHz) | Pass / Fail |
|-------|-------------------|-------------------------------|---------|---------|------------------|--------------------------------------|----------------------|-------------|
|       |                   | Chain 0                       | Chain 1 | Chain 2 |                  |                                      |                      |             |
| 58    | 5290              | -1.64                         | -0.94   | -0.43   | 0.19             | 3.99                                 | 11.00                | Pass        |
| 106   | 5530              | -1.33                         | -0.23   | 0.00    | 0.19             | 4.48                                 | 11.00                | Pass        |
| 122   | 5610              | -0.14                         | 0.43    | 0.70    | 0.19             | 5.31                                 | 11.00                | Pass        |


**Note:** 1. Method a) of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.

2. For UNII-2A: Directional gain = 5.95dBi < 6dBi, so the power density limit shall not be reduced.

3. For UNII-2C: Directional gain = 5.98dBi < 6dBi, so the power density limit shall not be reduced.

4. Refer to section 2.1 for duty cycle spectrum plot

\*\*此測試圖僅放測試結果最差的頻道。

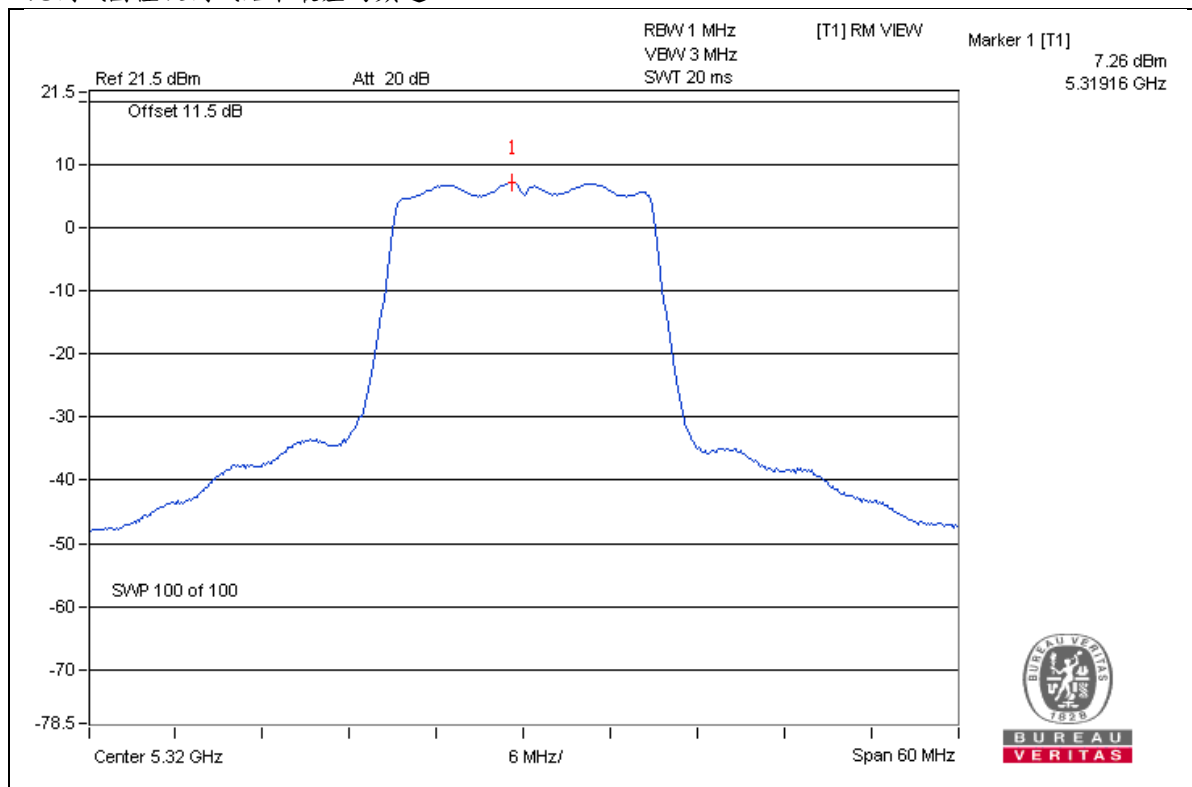

## 12.6 量測結果判定

依據測試數據結果，符合低功率射頻電機技術規範之要求。

### 13 6 dB 頻寬之要求

#### 13.1 適用標準

| 待測物操作頻帶                                                 | 適用標準                    |
|---------------------------------------------------------|-------------------------|
| <input checked="" type="checkbox"/> 5.725 GHz~5.850 GHz | 請見本報告 3.1 節第 6 項(II)的規定 |

#### 13.2 量測方法


- 將待測物輸出經由衰減器接到頻譜分析儀上。
- 設定待測物處於連續發射狀態。
- 計算由最大輸出功率峰值減6dB的最大頻率範圍。

#### 13.3 量測儀器

| DESCRIPTION & MANUFACTURER | MODEL NO. | SERIAL NO. | CALIBRATED DATE | CALIBRATED UNTIL |
|----------------------------|-----------|------------|-----------------|------------------|
| Spectrum Analyzer R&S      | FSP40     | 100060     | May 11, 2016    | May 10, 2017     |

**NOTE:** 1. The test was performed in Oven room 2.  
2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

#### 13.4 測試配置



### 13.5 量測結果

|        |      |        |                 |
|--------|------|--------|-----------------|
| 操作模式   | 發射   | 測試日期   | 105 年 10 月 08 日 |
| 量測場地溫度 | 25°C | 量測場地濕度 | 60%RH           |
| 測試者    | 鄭又瑋  |        |                 |

#### CDD Mode

##### 802.11a

| Channel | Frequency (MHz) | 6dB Bandwidth (MHz) |         |         | Minimum Limit (MHz) | Pass / Fail |
|---------|-----------------|---------------------|---------|---------|---------------------|-------------|
|         |                 | Chain 0             | Chain 1 | Chain 2 |                     |             |
| 149     | 5745            | 16.39               | 16.41   | 16.38   | 0.5                 | PASS        |
| 157     | 5785            | 16.41               | 16.40   | 16.39   | 0.5                 | PASS        |
| 165     | 5825            | 16.40               | 16.40   | 16.41   | 0.5                 | PASS        |

#### Beamforming Mode

##### 802.11ac (VHT20)

| Channel | Frequency (MHz) | 6dB Bandwidth (MHz) |         |         | Minimum Limit (MHz) | Pass / Fail |
|---------|-----------------|---------------------|---------|---------|---------------------|-------------|
|         |                 | Chain 0             | Chain 1 | Chain 2 |                     |             |
| 149     | 5745            | 17.63               | 17.67   | 17.65   | 0.5                 | PASS        |
| 157     | 5785            | 17.62               | 17.65   | 17.64   | 0.5                 | PASS        |
| 165     | 5825            | 17.63               | 17.66   | 17.63   | 0.5                 | PASS        |


##### 802.11ac (VHT40)

| Channel | Frequency (MHz) | 6dB Bandwidth (MHz) |         |         | Minimum Limit (MHz) | Pass / Fail |
|---------|-----------------|---------------------|---------|---------|---------------------|-------------|
|         |                 | Chain 0             | Chain 1 | Chain 2 |                     |             |
| 151     | 5755            | 36.48               | 36.50   | 36.44   | 0.5                 | PASS        |
| 159     | 5795            | 36.44               | 36.47   | 36.46   | 0.5                 | PASS        |

##### 802.11ac (VHT80)

| Channel | Frequency (MHz) | 6dB Bandwidth (MHz) |         |         | Minimum Limit (MHz) | Pass / Fail |
|---------|-----------------|---------------------|---------|---------|---------------------|-------------|
|         |                 | Chain 0             | Chain 1 | Chain 2 |                     |             |
| 155     | 5775            | 76.10               | 75.99   | 76.02   | 0.5                 | PASS        |

\*\*此測試圖僅放測試結果最差的頻道。

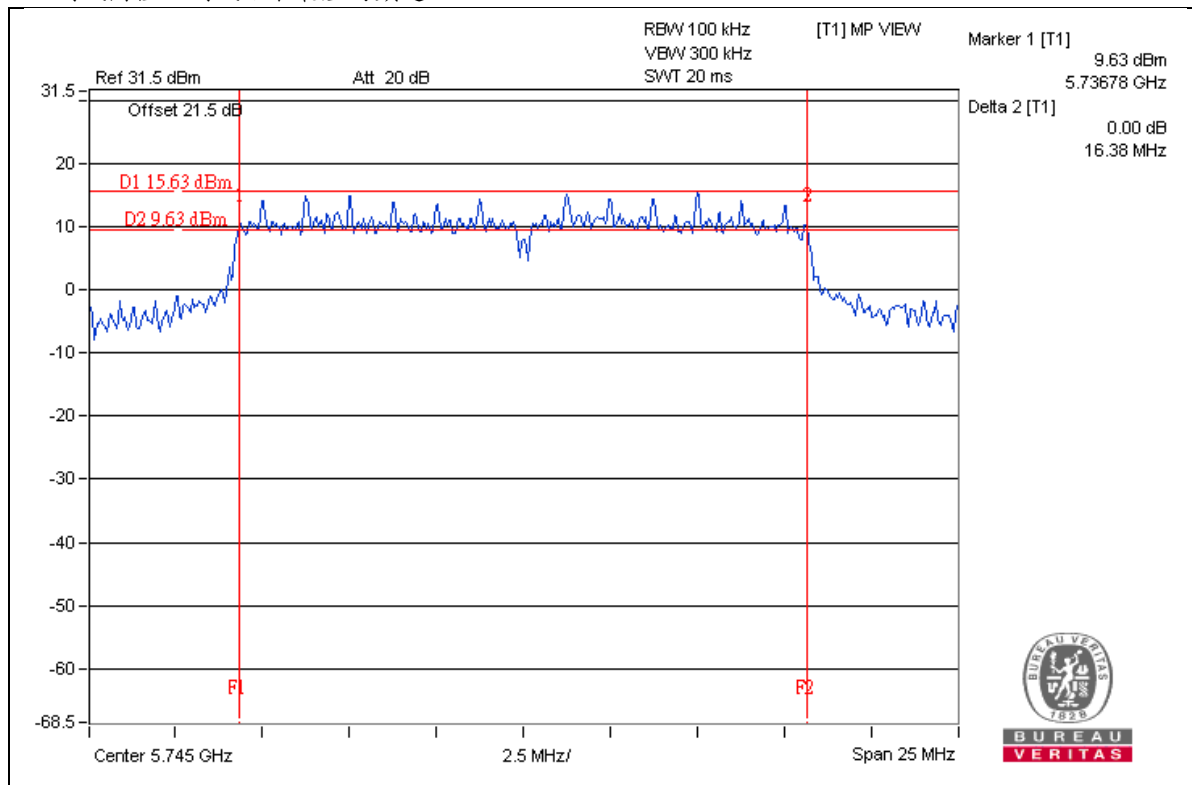

### 13.6 量測結果判定

依據測試數據結果，符合低功率射頻電機技術規範之要求。

## 14 電波暴露量之評估

### 14.1 適用標準

請見本報告 3.1 節第 12 項的規定。

### 14.2 評估方法

a) 以 7.5 及 11.5 節所測得的最大輸出功率值再加上待測物天線的增益值(Gain)帶入下面公式換算出待測物所輻射的功率密度。

$$b) P_d = (P_{out} * G) / (4 * \pi * r^2)$$

where

$P_d$  = power density in  $mW/cm^2$

$P_{out}$  = output power to antenna in mW

$G$  = gain of antenna in linear scale

$\pi$  = 3.1416

$R$  = distance between observation point and center of the radiator in cm

### 14.3 評估結果

|                                                                        |
|------------------------------------------------------------------------|
| 電波暴露量之評估                                                               |
| <input type="checkbox"/> 待測物並非是 WLAN AP/Router 產品，不需進行電波暴露量之評估         |
| <input checked="" type="checkbox"/> 待測物為 WLAN AP/Router 產品，需進行電波暴露量之評估 |

#### WLAN:

| Frequency (MHz) | Max Power (dBm) | Max Power (mW) | Antenna Gain (dBi) | Distance (cm) | Power Density ( $mW/cm^2$ ) | Limit ( $mW/cm^2$ ) |
|-----------------|-----------------|----------------|--------------------|---------------|-----------------------------|---------------------|
| 2412-2462       | 27.49           | 560.898        | 5.65               | 23            | 0.30990                     | 1                   |
| 5180-5240       | 27.66           | 583.131        | 5.95               | 23            | 0.34522                     | 1                   |
| 5260-5320       | 23.33           | 215.105        | 5.95               | 23            | 0.12735                     | 1                   |
| 5500-5700       | 23.51           | 224.591        | 5.98               | 23            | 0.13388                     | 1                   |
| 5745-5825       | 29.61           | 913.29         | 5.98               | 23            | 0.54443                     | 1                   |

#### CONCLUSION:

Both of the WLAN 2.4G & WLAN 5G can transmit simultaneously, the formula of calculated the MPE is:

$$CPD1 / LPD1 + CPD2 / LPD2 + \dots \text{etc.} < 1$$

CPD = Calculation power density

LPD = Limit of power density

$$WLAN\ 2.4GHz + WLAN\ 5GHz = 0.30990 / 1 + 0.54443 / 1 = 0.85433$$

Therefore, the maximum calculation of this situation is 0.219, which is less than the "1" limit.

## 15 Radiated Out of Band Emission (OOBE) Measurement (For U-NII-3 Band)


### 802.11a

|         |                   |         |                       |
|---------|-------------------|---------|-----------------------|
| 操作模式：   | 發射                | 調變技術：   | OFDM                  |
| 基本波頻率：  | CH 149 : 5745 MHz | 測試儀器：   | (PK) RB=1MHz, VB=3MHz |
| 量測場地溫度： | 23°C              | 量測場地濕度： | 64%RH                 |
| 測試日期：   | 105 年 9 月 22 日    | 測試者：    | 鄭樹營                   |

| ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M |             |                         |                |             |                    |                      |                  |                          |
|-----------------------------------------------------|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| NO.                                                 | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
| 1                                                   | #5583.25    | 59.4 PK                 | 68.2           | -8.8        | 1.07 H             | 171                  | 57.1             | 2.3                      |
| 2                                                   | #5991.75    | 58.1 PK                 | 68.2           | -10.1       | 1.07 H             | 171                  | 54.8             | 3.3                      |

#### REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " # ": The radiated frequency is out of the restricted band.

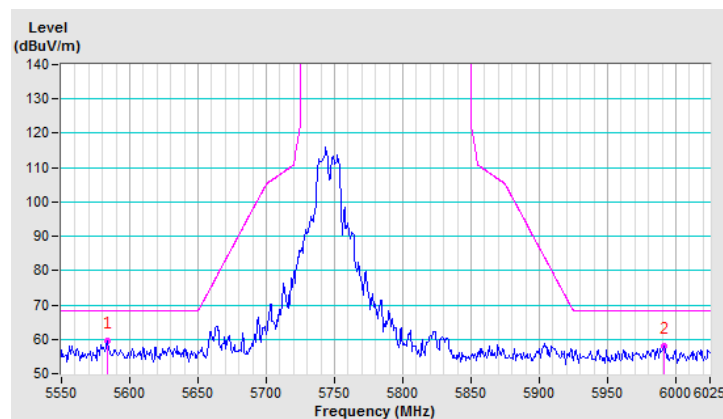


|         |                   |         |                       |
|---------|-------------------|---------|-----------------------|
| 操作模式：   | 發射                | 調變技術：   | OFDM                  |
| 基本波頻率：  | CH 149 : 5745 MHz | 測試儀器：   | (PK) RB=1MHz, VB=3MHz |
| 量測場地溫度： | 23°C              | 量測場地濕度： | 64%RH                 |
| 測試日期：   | 105 年 9 月 22 日    | 測試者：    | 鄭樹營                   |

#### ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
|-----|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| 1   | #5588.95    | 60.2 PK                 | 68.2           | -8.0        | 1.78 V             | 6                    | 57.9             | 2.3                      |
| 2   | #5988.43    | 61.2 PK                 | 68.2           | -7.0        | 1.78 V             | 6                    | 57.9             | 3.3                      |

#### REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " # ": The radiated frequency is out of the restricted band.

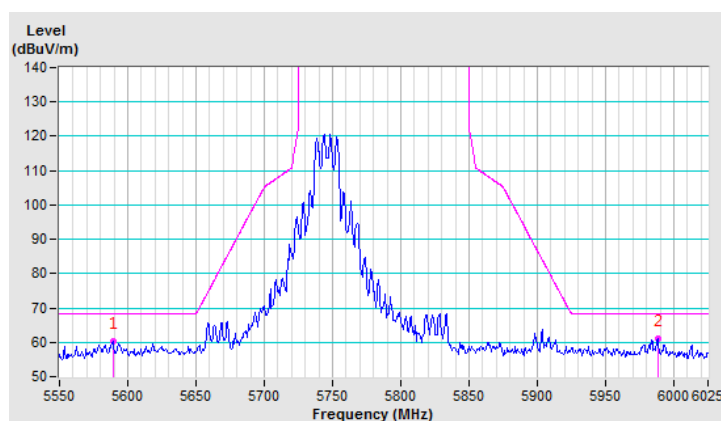


|         |                   |         |                       |
|---------|-------------------|---------|-----------------------|
| 操作模式：   | 發射                | 調變技術：   | OFDM                  |
| 基本波頻率：  | CH 157 : 5785 MHz | 測試儀器：   | (PK) RB=1MHz, VB=3MHz |
| 量測場地溫度： | 23°C              | 量測場地濕度： | 64%RH                 |
| 測試日期：   | 105 年 9 月 22 日    | 測試者：    | 鄭樹營                   |

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

| NO. | FREQ.<br>(MHz) | EMISSION<br>LEVEL<br>(dBuV/m) | LIMIT<br>(dBuV/m) | MARGIN<br>(dB) | ANTENNA<br>HEIGHT<br>(m) | TABLE<br>ANGLE<br>(Degree) | RAW<br>VALUE<br>(dBuV) | CORRECTION<br>FACTOR<br>(dB/m) |
|-----|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| 1   | #5628.85       | 60.0 PK                       | 68.2              | -8.2           | 1.02 H                   | 167                        | 57.5                   | 2.5                            |
| 2   | #5993.65       | 59.0 PK                       | 68.2              | -9.2           | 1.02 H                   | 167                        | 55.7                   | 3.3                            |

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " # ": The radiated frequency is out of the restricted band.

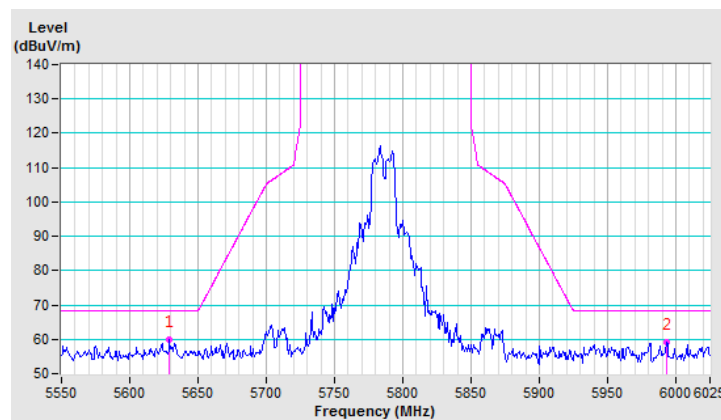


|         |                   |         |                       |
|---------|-------------------|---------|-----------------------|
| 操作模式：   | 發射                | 調變技術：   | OFDM                  |
| 基本波頻率：  | CH 157 : 5785 MHz | 測試儀器：   | (PK) RB=1MHz, VB=3MHz |
| 量測場地溫度： | 23°C              | 量測場地濕度： | 64%RH                 |
| 測試日期：   | 105 年 9 月 22 日    | 測試者：    | 鄭樹營                   |

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

| NO. | FREQ.<br>(MHz) | EMISSION<br>LEVEL<br>(dBuV/m) | LIMIT<br>(dBuV/m) | MARGIN<br>(dB) | ANTENNA<br>HEIGHT<br>(m) | TABLE<br>ANGLE<br>(Degree) | RAW<br>VALUE<br>(dBuV) | CORRECTION<br>FACTOR<br>(dB/m) |
|-----|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| 1   | #5621.73       | 61.4 PK                       | 68.2              | -6.8           | 1.87 V                   | 4                          | 58.9                   | 2.5                            |
| 2   | #5941.40       | 61.7 PK                       | 68.2              | -6.5           | 1.87 V                   | 4                          | 58.8                   | 2.9                            |

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " # ": The radiated frequency is out of the restricted band.

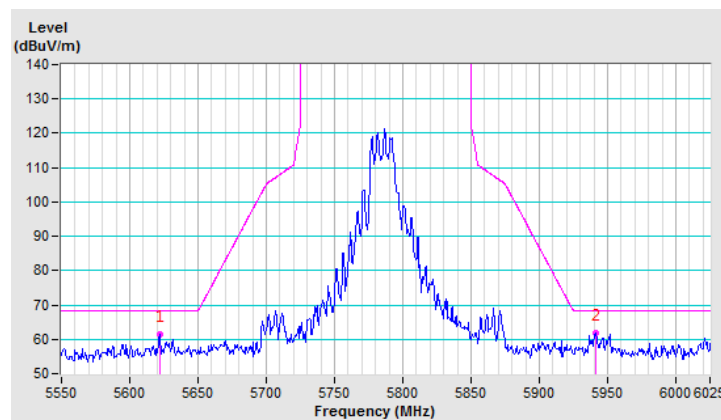


|         |                   |         |                       |
|---------|-------------------|---------|-----------------------|
| 操作模式：   | 發射                | 調變技術：   | OFDM                  |
| 基本波頻率：  | CH 165 : 5825 MHz | 測試儀器：   | (PK) RB=1MHz, VB=3MHz |
| 量測場地溫度： | 23°C              | 量測場地濕度： | 64%RH                 |
| 測試日期：   | 105 年 9 月 22 日    | 測試者：    | 鄭樹營                   |

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
|-----|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| 1   | #5594.65    | 58.6 PK                 | 68.2           | -9.6        | 1.02 H             | 167                  | 56.3             | 2.3                      |
| 2   | #5982.25    | 61.6 PK                 | 68.2           | -6.6        | 1.02 H             | 167                  | 58.4             | 3.2                      |

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " # ": The radiated frequency is out of the restricted band.

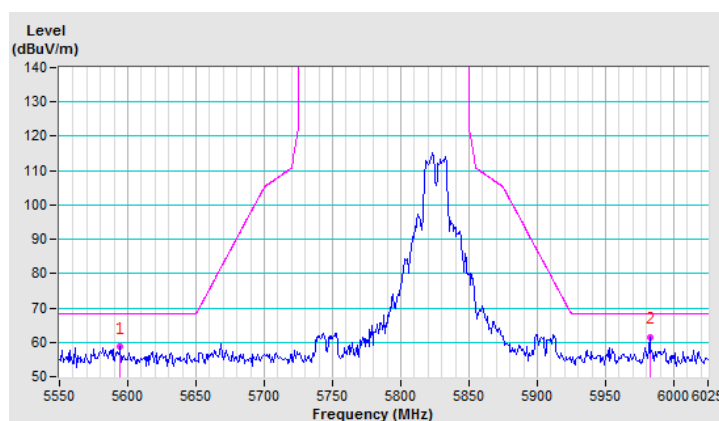


|         |                   |         |                       |
|---------|-------------------|---------|-----------------------|
| 操作模式：   | 發射                | 調變技術：   | OFDM                  |
| 基本波頻率：  | CH 165 : 5825 MHz | 測試儀器：   | (PK) RB=1MHz, VB=3MHz |
| 量測場地溫度： | 23°C              | 量測場地濕度： | 64%RH                 |
| 測試日期：   | 105 年 9 月 22 日    | 測試者：    | 鄭樹營                   |

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

| NO. | FREQ.<br>(MHz) | EMISSION<br>LEVEL<br>(dBuV/m) | LIMIT<br>(dBuV/m) | MARGIN<br>(dB) | ANTENNA<br>HEIGHT<br>(m) | TABLE<br>ANGLE<br>(Degree) | RAW<br>VALUE<br>(dBuV) | CORRECTION<br>FACTOR<br>(dB/m) |
|-----|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| 1   | #5584.20       | 60.7 PK                       | 68.2              | -7.5           | 1.97 V                   | 5                          | 58.4                   | 2.3                            |
| 2   | #5978.93       | 60.4 PK                       | 68.2              | -7.8           | 1.97 V                   | 5                          | 57.2                   | 3.2                            |

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " # ": The radiated frequency is out of the restricted band.

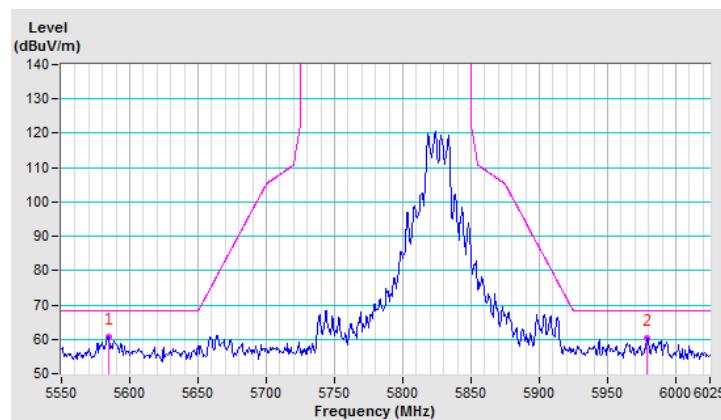

### 802.11ac (VHT20)


|         |                 |         |                       |
|---------|-----------------|---------|-----------------------|
| 操作模式：   | 發射              | 調變技術：   | OFDM                  |
| 基本波頻率：  | CH 149：5745 MHz | 測試儀器：   | (PK) RB=1MHz, VB=3MHz |
| 量測場地溫度： | 23°C            | 量測場地濕度： | 65%RH                 |
| 測試日期：   | 106 年 10 月 4 日  | 測試者：    | 陳志毅                   |

#### ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

| NO. | FREQ.<br>(MHz) | EMISSION<br>LEVEL<br>(dBuV/m) | LIMIT<br>(dBuV/m) | MARGIN<br>(dB) | ANTENNA<br>HEIGHT<br>(m) | TABLE<br>ANGLE<br>(Degree) | RAW<br>VALUE<br>(dBuV) | CORRECTION<br>FACTOR<br>(dB/m) |
|-----|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| 1   | #5588.36       | 56.1 PK                       | 68.2              | -12.1          | 1.07 H                   | 188                        | 51.5                   | 4.6                            |
| 2   | #5986.85       | 56.5 PK                       | 68.2              | -11.7          | 1.07 H                   | 188                        | 50.9                   | 5.6                            |

#### REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " # ": The radiated frequency is out of the restricted band.

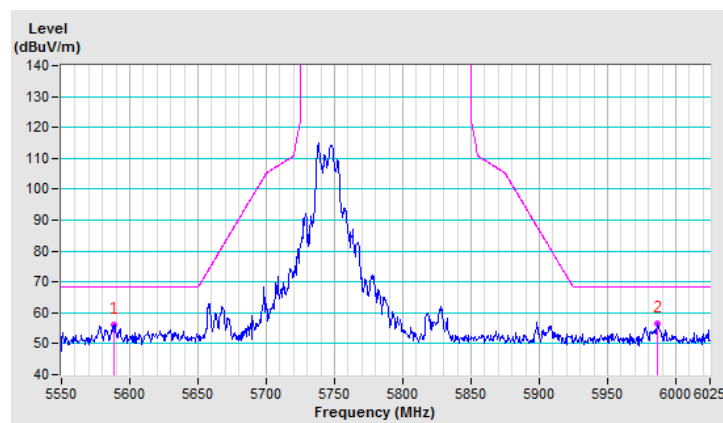


|         |                   |         |                       |
|---------|-------------------|---------|-----------------------|
| 操作模式：   | 發射                | 調變技術：   | OFDM                  |
| 基本波頻率：  | CH 149 : 5745 MHz | 測試儀器：   | (PK) RB=1MHz, VB=3MHz |
| 量測場地溫度： | 23°C              | 量測場地濕度： | 65%RH                 |
| 測試日期：   | 106 年 10 月 4 日    | 測試者：    | 陳志毅                   |

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

| NO. | FREQ.<br>(MHz) | EMISSION<br>LEVEL<br>(dBuV/m) | LIMIT<br>(dBuV/m) | MARGIN<br>(dB) | ANTENNA<br>HEIGHT<br>(m) | TABLE<br>ANGLE<br>(Degree) | RAW<br>VALUE<br>(dBuV) | CORRECTION<br>FACTOR<br>(dB/m) |
|-----|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| 1   | #5586.29       | 58.9 PK                       | 68.2              | -9.3           | 1.53 V                   | 140                        | 54.3                   | 4.6                            |
| 2   | #5984.61       | 62.7 PK                       | 68.2              | -5.5           | 1.53 V                   | 140                        | 57.1                   | 5.6                            |

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " # ": The radiated frequency is out of the restricted band.

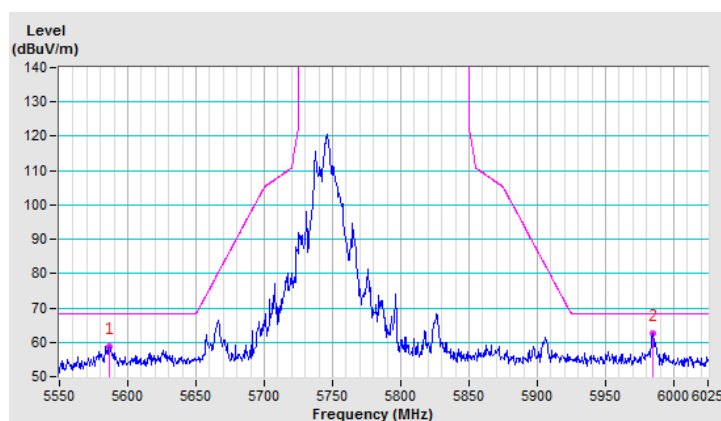


|         |                   |         |                       |
|---------|-------------------|---------|-----------------------|
| 操作模式：   | 發射                | 調變技術：   | OFDM                  |
| 基本波頻率：  | CH 157 : 5785 MHz | 測試儀器：   | (PK) RB=1MHz, VB=3MHz |
| 量測場地溫度： | 23°C              | 量測場地濕度： | 65%RH                 |
| 測試日期：   | 106 年 10 月 4 日    | 測試者：    | 陳志毅                   |

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

| NO. | FREQ.<br>(MHz) | EMISSION<br>LEVEL<br>(dBuV/m) | LIMIT<br>(dBuV/m) | MARGIN<br>(dB) | ANTENNA<br>HEIGHT<br>(m) | TABLE<br>ANGLE<br>(Degree) | RAW<br>VALUE<br>(dBuV) | CORRECTION<br>FACTOR<br>(dB/m) |
|-----|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| 1   | #5628.05       | 56.9 PK                       | 68.2              | -11.3          | 1.12 H                   | 173                        | 52.2                   | 4.7                            |
| 2   | #5948.42       | 57.3 PK                       | 68.2              | -10.9          | 1.12 H                   | 173                        | 51.9                   | 5.4                            |

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " # ": The radiated frequency is out of the restricted band.

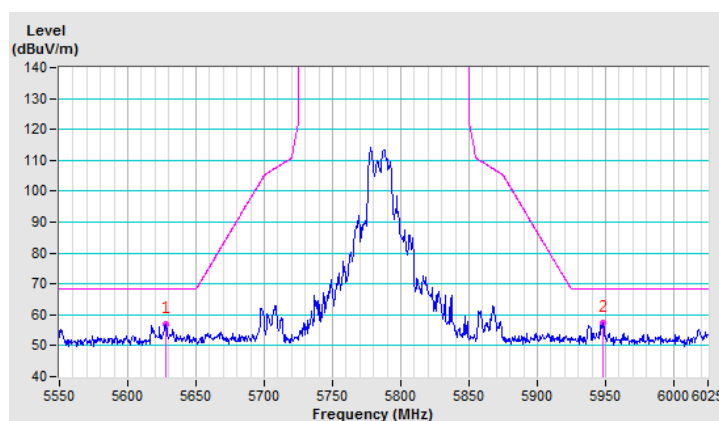


|         |                   |         |                       |
|---------|-------------------|---------|-----------------------|
| 操作模式：   | 發射                | 調變技術：   | OFDM                  |
| 基本波頻率：  | CH 157 : 5785 MHz | 測試儀器：   | (PK) RB=1MHz, VB=3MHz |
| 量測場地溫度： | 23°C              | 量測場地濕度： | 65%RH                 |
| 測試日期：   | 106 年 10 月 4 日    | 測試者：    | 陳志毅                   |

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

| NO. | FREQ.<br>(MHz) | EMISSION<br>LEVEL<br>(dBuV/m) | LIMIT<br>(dBuV/m) | MARGIN<br>(dB) | ANTENNA<br>HEIGHT<br>(m) | TABLE<br>ANGLE<br>(Degree) | RAW<br>VALUE<br>(dBuV) | CORRECTION<br>FACTOR<br>(dB/m) |
|-----|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| 1   | #5626.61       | 59.6 PK                       | 68.2              | -8.6           | 1.50 V                   | 142                        | 54.9                   | 4.7                            |
| 2   | #5946.74       | 61.0 PK                       | 68.2              | -7.2           | 1.50 V                   | 142                        | 55.6                   | 5.4                            |

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " # ": The radiated frequency is out of the restricted band.

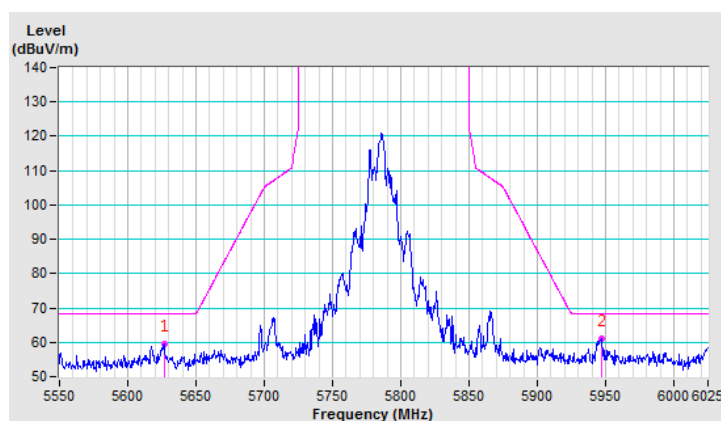


|         |                 |         |                       |
|---------|-----------------|---------|-----------------------|
| 操作模式：   | 發射              | 調變技術：   | OFDM                  |
| 基本波頻率：  | CH 165：5825 MHz | 測試儀器：   | (PK) RB=1MHz, VB=3MHz |
| 量測場地溫度： | 23°C            | 量測場地濕度： | 65%RH                 |
| 測試日期：   | 106 年 10 月 4 日  | 測試者：    | 陳志毅                   |

#### ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
|-----|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| 1   | #5582.13    | 57.1 PK                 | 68.2           | -11.1       | 1.04 H             | 186                  | 52.5             | 4.6                      |
| 2   | #5987.52    | 56.7 PK                 | 68.2           | -11.5       | 1.04 H             | 186                  | 51.1             | 5.6                      |

#### REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " # ": The radiated frequency is out of the restricted band.

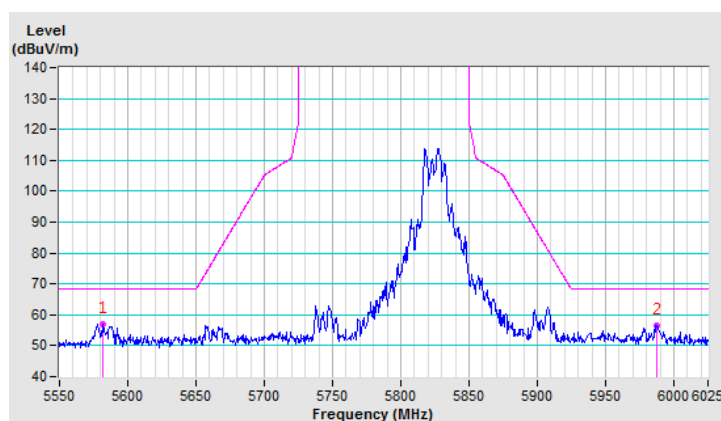


|         |                   |         |                       |
|---------|-------------------|---------|-----------------------|
| 操作模式：   | 發射                | 調變技術：   | OFDM                  |
| 基本波頻率：  | CH 165 : 5825 MHz | 測試儀器：   | (PK) RB=1MHz, VB=3MHz |
| 量測場地溫度： | 23°C              | 量測場地濕度： | 65%RH                 |
| 測試日期：   | 106 年 10 月 4 日    | 測試者：    | 陳志毅                   |

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
|-----|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| 1   | #5587.01    | 58.0 PK                 | 68.2           | -10.2       | 1.54 V             | 125                  | 53.4             | 4.6                      |
| 2   | #5985.95    | 61.0 PK                 | 68.2           | -7.2        | 1.54 V             | 125                  | 55.4             | 5.6                      |

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " # ": The radiated frequency is out of the restricted band.

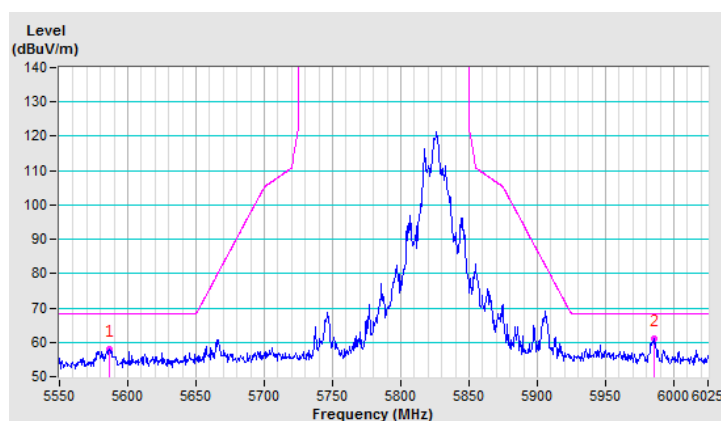

# 802.11ac (VHT40)


|         |                   |         |                       |
|---------|-------------------|---------|-----------------------|
| 操作模式：   | 發射                | 調變技術：   | OFDM                  |
| 基本波頻率：  | CH 151 : 5755 MHz | 測試儀器：   | (PK) RB=1MHz, VB=3MHz |
| 量測場地溫度： | 23°C              | 量測場地濕度： | 64%RH                 |
| 測試日期：   | 105 年 9 月 22 日    | 測試者：    | 鄭樹營                   |

## ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
|-----|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| 1   | #5647.85    | 64.5 PK                 | 68.2           | -3.7        | 1.04 H             | 168                  | 62.0             | 2.5                      |
| 2   | #5951.37    | 59.4 PK                 | 68.2           | -8.8        | 1.04 H             | 168                  | 56.4             | 3.0                      |

### REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " # ": The radiated frequency is out of the restricted band.

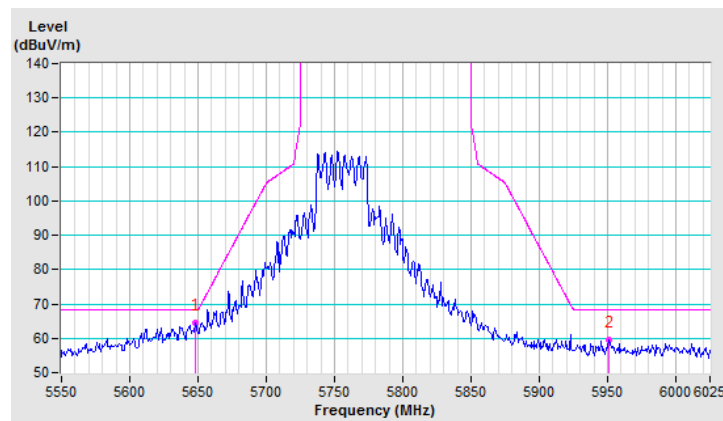


|         |                   |         |                       |
|---------|-------------------|---------|-----------------------|
| 操作模式：   | 發射                | 調變技術：   | OFDM                  |
| 基本波頻率：  | CH 151 : 5755 MHz | 測試儀器：   | (PK) RB=1MHz, VB=3MHz |
| 量測場地溫度： | 23°C              | 量測場地濕度： | 64%RH                 |
| 測試日期：   | 105 年 9 月 22 日    | 測試者：    | 鄭樹營                   |

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

| NO. | FREQ.<br>(MHz) | EMISSION<br>LEVEL<br>(dBuV/m) | LIMIT<br>(dBuV/m) | MARGIN<br>(dB) | ANTENNA<br>HEIGHT<br>(m) | TABLE<br>ANGLE<br>(Degree) | RAW<br>VALUE<br>(dBuV) | CORRECTION<br>FACTOR<br>(dB/m) |
|-----|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| 1   | #5645.95       | 67.4 PK                       | 68.2              | -0.8           | 1.95 V                   | 5                          | 64.9                   | 2.5                            |
| 2   | #5929.05       | 60.5 PK                       | 68.2              | -7.7           | 1.95 V                   | 5                          | 57.6                   | 2.9                            |

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " # ": The radiated frequency is out of the restricted band.

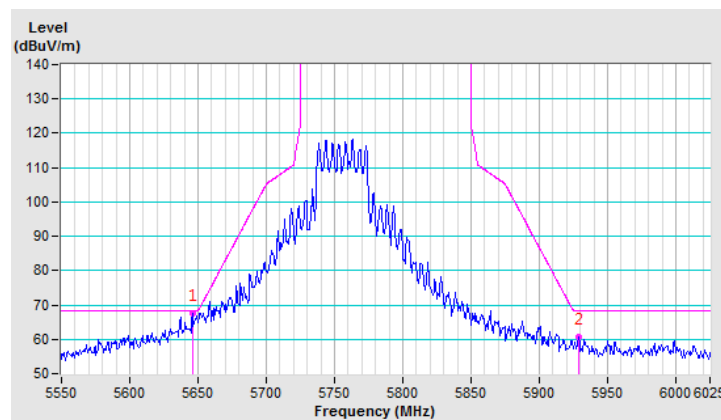


|         |                   |         |                       |
|---------|-------------------|---------|-----------------------|
| 操作模式：   | 發射                | 調變技術：   | OFDM                  |
| 基本波頻率：  | CH 159 : 5795 MHz | 測試儀器：   | (PK) RB=1MHz, VB=3MHz |
| 量測場地溫度： | 23°C              | 量測場地濕度： | 64%RH                 |
| 測試日期：   | 105 年 9 月 22 日    | 測試者：    | 鄭樹營                   |

#### ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
|-----|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| 1   | #5632.65    | 62.5 PK                 | 68.2           | -5.7        | 1.07 H             | 168                  | 60.0             | 2.5                      |
| 2   | #5957.07    | 61.5 PK                 | 68.2           | -6.7        | 1.07 H             | 168                  | 58.5             | 3.0                      |

#### REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " # ": The radiated frequency is out of the restricted band.

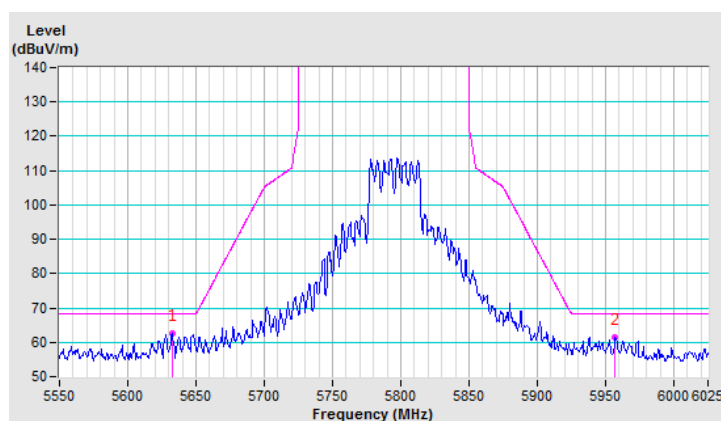


|         |                   |         |                       |
|---------|-------------------|---------|-----------------------|
| 操作模式：   | 發射                | 調變技術：   | OFDM                  |
| 基本波頻率：  | CH 159 : 5795 MHz | 測試儀器：   | (PK) RB=1MHz, VB=3MHz |
| 量測場地溫度： | 23°C              | 量測場地濕度： | 64%RH                 |
| 測試日期：   | 105 年 9 月 22 日    | 測試者：    | 鄭樹營                   |

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

| NO. | FREQ.<br>(MHz) | EMISSION<br>LEVEL<br>(dBuV/m) | LIMIT<br>(dBuV/m) | MARGIN<br>(dB) | ANTENNA<br>HEIGHT<br>(m) | TABLE<br>ANGLE<br>(Degree) | RAW<br>VALUE<br>(dBuV) | CORRECTION<br>FACTOR<br>(dB/m) |
|-----|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| 1   | #5650.70       | 65.9 PK                       | 68.7              | -2.8           | 1.96 V                   | 5                          | 63.4                   | 2.5                            |
| 2   | #5938.07       | 63.2 PK                       | 68.2              | -5.0           | 1.96 V                   | 5                          | 60.3                   | 2.9                            |

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " # ": The radiated frequency is out of the restricted band.

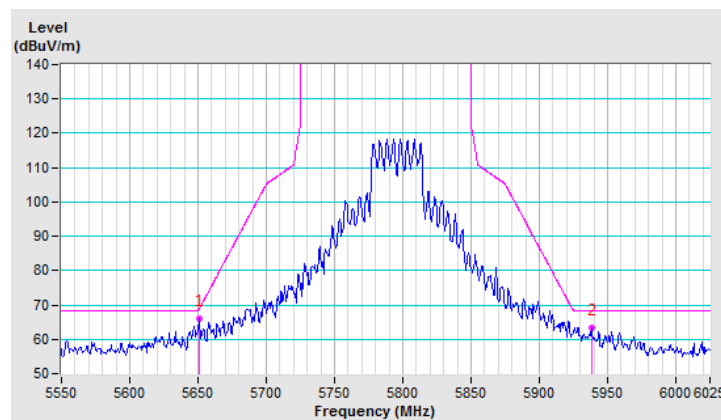

# 802.11ac (VHT80)


|         |                 |         |                       |
|---------|-----------------|---------|-----------------------|
| 操作模式：   | 發射              | 調變技術：   | OFDM                  |
| 基本波頻率：  | CH 155：5775 MHz | 測試儀器：   | (PK) RB=1MHz, VB=3MHz |
| 量測場地溫度： | 23°C            | 量測場地濕度： | 65%RH                 |
| 測試日期：   | 106 年 10 月 4 日  | 測試者：    | 陳志毅                   |

## ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
|-----|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| 1   | #5647.67    | 58.0 PK                 | 68.2           | -10.2       | 1.06 H             | 176                  | 53.2             | 4.8                      |
| 2   | #5927.45    | 57.5 PK                 | 68.2           | -10.7       | 1.06 H             | 176                  | 52.1             | 5.4                      |

### REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " # ": The radiated frequency is out of the restricted band.

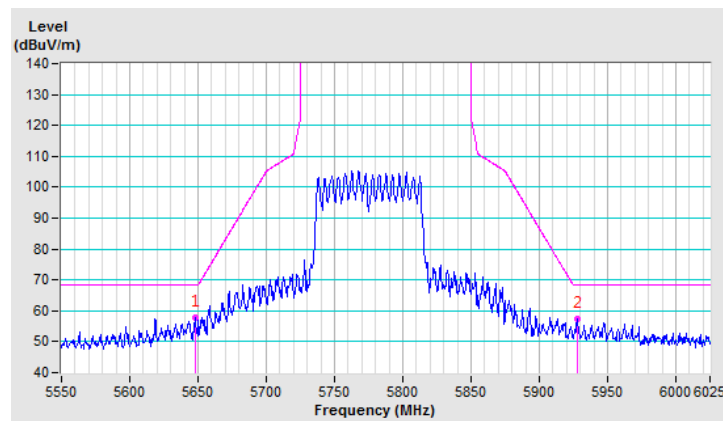


|         |                   |         |                       |
|---------|-------------------|---------|-----------------------|
| 操作模式：   | 發射                | 調變技術：   | OFDM                  |
| 基本波頻率：  | CH 155 : 5775 MHz | 測試儀器：   | (PK) RB=1MHz, VB=3MHz |
| 量測場地溫度： | 23°C              | 量測場地濕度： | 65%RH                 |
| 測試日期：   | 106 年 10 月 4 日    | 測試者：    | 陳志毅                   |

#### ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
|-----|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| 1   | #5636.53    | 61.9 PK                 | 68.2           | -6.3        | 2.56 V             | 134                  | 57.1             | 4.8                      |
| 2   | #5950.39    | 59.9 PK                 | 68.2           | -8.3        | 2.56 V             | 134                  | 54.5             | 5.4                      |

#### REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " # ": The radiated frequency is out of the restricted band.

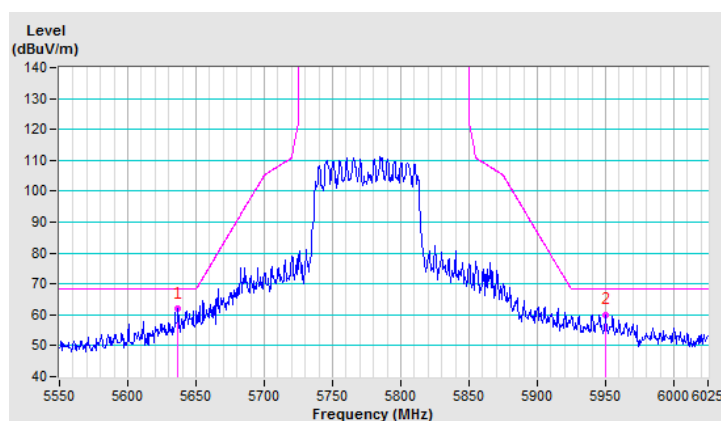

## 16 檢測實驗室基本資料

立德國際商品試驗有限公司桃園分公司提供產業界最佳的檢測以及諮詢服務。  
本公司為 ISO/IEC 17025 認可實驗室。

如您有任何問題或建議，請與下列實驗室聯絡：

林口 EMC / RF 實驗室：

Tel: 886-2-26052180

Fax: 886-2-26051924

新竹 EMC / RF 及通訊實驗室：

Tel: 886-3-6668565

Fax: 886-3-6668323

華亞 EMC / RF / Safety 實驗室：

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: [service.adt@tw.bureauveritas.com](mailto:service.adt@tw.bureauveritas.com)

Web Site: [www.bureauveritas-adt.com](http://www.bureauveritas-adt.com)

您也可以在我們的網站內找到各實驗室的地圖。

---END---