

測試頻道: IEEE 802.11ac (VHT40) /
5230 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢測器: Peak/AV


測試日期: 108/06/21

環境溫度: 24 °C

環境濕度: 52%

Orthogonal Axis: X

Polarization: Horizontal

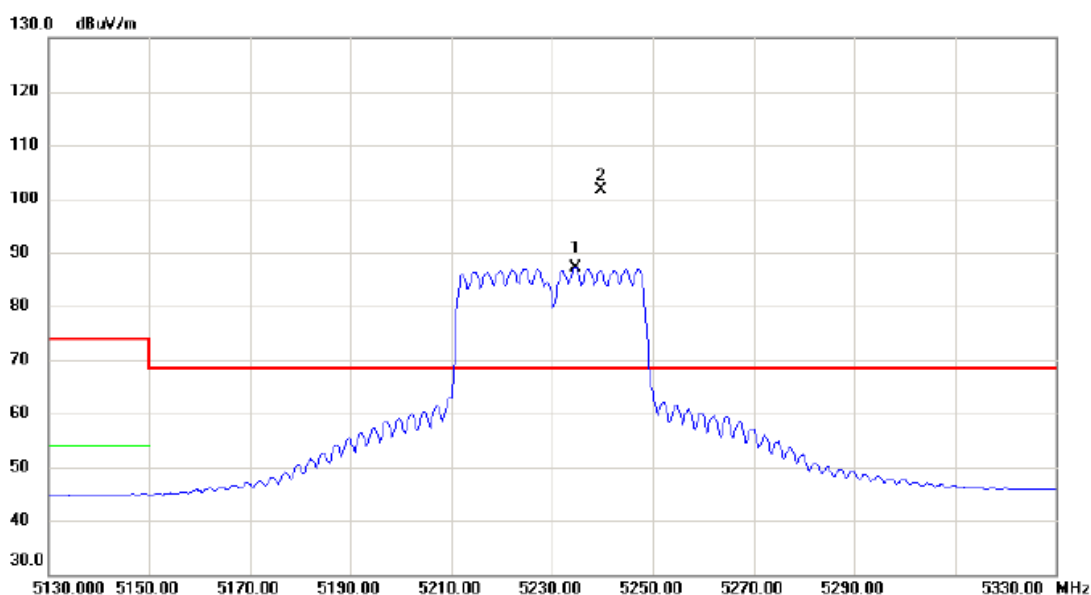

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	5234.700	72.62	14.51	87.13	68.30	18.83	AVG	主波訊號不予判定
2	*	5239.700	87.20	14.51	101.71	68.30	33.41	peak	主波訊號不予判定

測試頻道: IEEE 802.11ac (VHT40) /
5230 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢測器: Peak/AV


測試日期: 108/06/22

環境溫度: 24 °C

環境濕度: 52%

Orthogonal Axis: X

Polarization: Horizontal

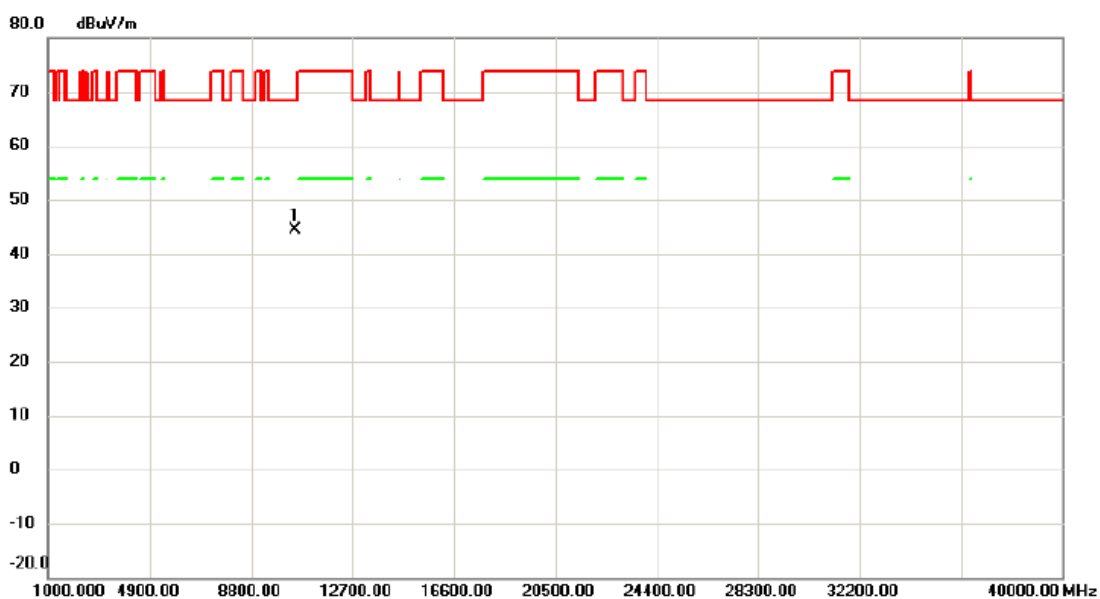

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	10467.150	29.80	14.48	44.28	68.30	-24.02	peak	

測試頻道: IEEE 802.11ac (VHT80) /
5210 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢測器: Peak/AV


測試日期: 108/06/21

環境溫度: 24 °C

環境濕度: 52%

Orthogonal Axis: X

Polarization: Vertical

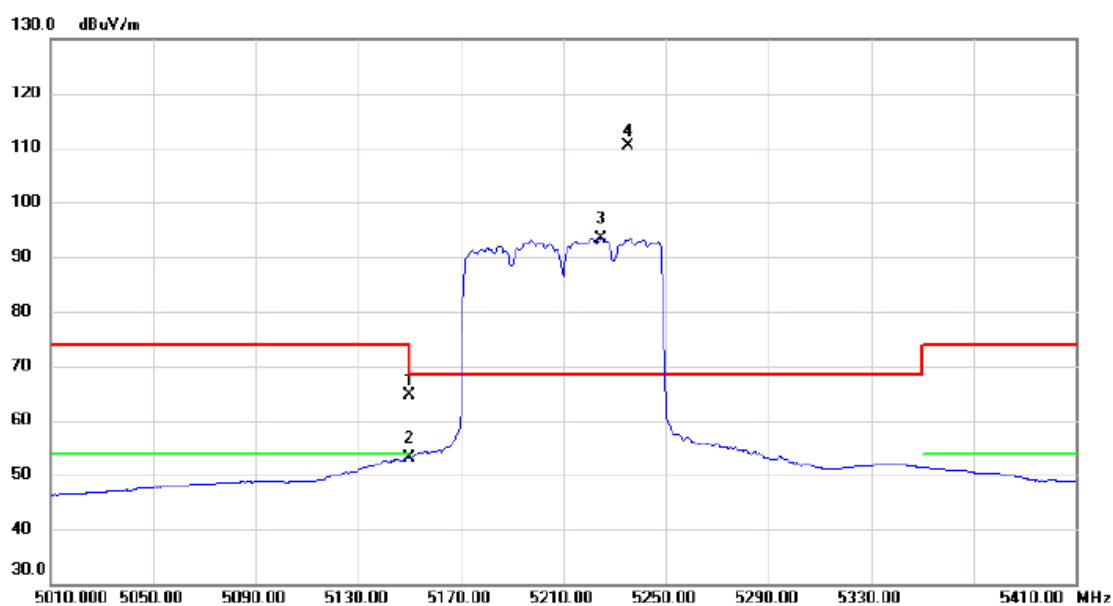


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5150.000	50.20	14.36	64.56	74.00	-9.44	peak	
2		5150.000	38.73	14.36	53.09	54.00	-0.91	AVG	
3	X	5224.600	78.93	14.49	93.42	68.30	25.12	AVG	主波訊號不予判定
4	*	5235.400	95.78	14.51	110.29	68.30	41.99	peak	主波訊號不予判定

測試頻道: IEEE 802.11ac (VHT80) /
5210 MHz
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢測器: Peak/AV
環境溫度: 24 °C

測試模式: 發射
視頻頻寬: 1000 kHz / 10 Hz
測試距離: 3 米
測試日期: 108/06/22
環境濕度: 52%

Orthogonal Axis: X

Polarization: Vertical

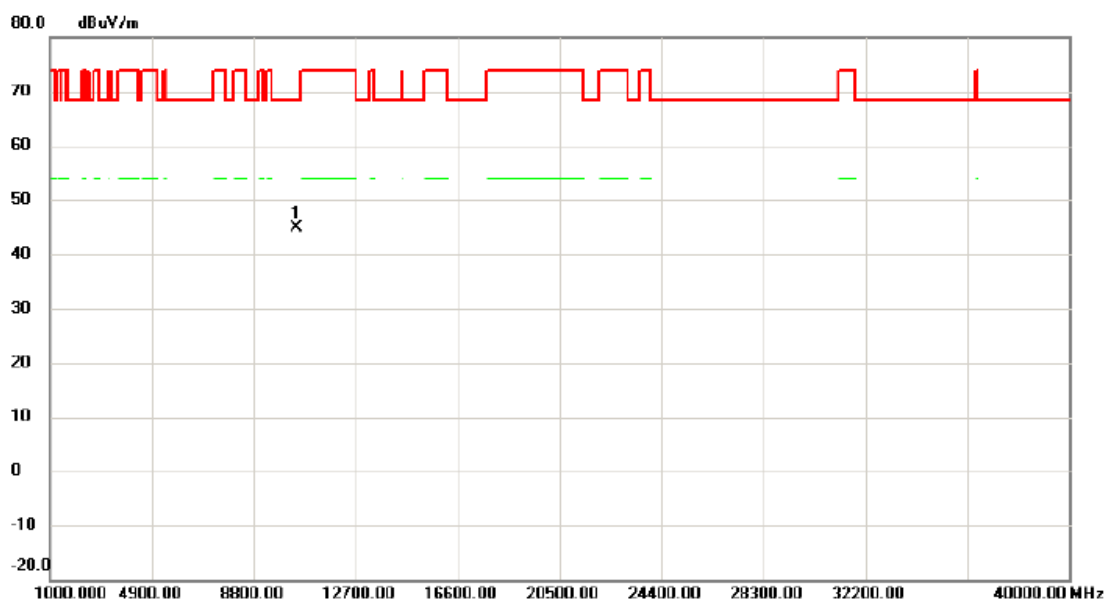


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10417.680	30.49	14.31	44.80	68.30	-23.50	peak	

測試頻道: IEEE 802.11ac (VHT80) /
5210 MHz
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢測器: Peak/AV
環境溫度: 24 °C

測試模式: 發射
視頻頻寬: 1000 kHz / 10 Hz
測試距離: 3 米
測試日期: 108/06/21
環境濕度: 52%

Orthogonal Axis: X

Polarization: Horizontal

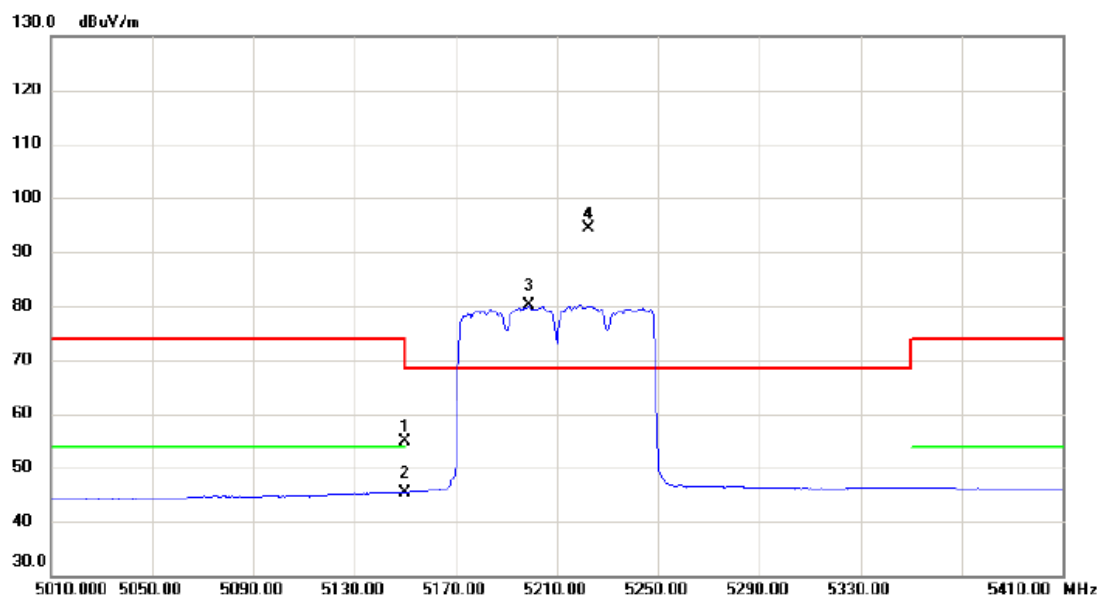

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5150.000	40.48	14.36	54.84	74.00	-19.16	peak	
2		5150.000	31.06	14.36	45.42	54.00	-8.58	AVG	
3	X	5199.000	65.65	14.45	80.10	68.30	11.80	AVG	主波訊號不予判定
4	*	5222.600	79.82	14.48	94.30	68.30	26.00	peak	主波訊號不予判定

測試頻道: IEEE 802.11ac (VHT80) /
5210 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢測器: Peak/AV


測試日期: 108/06/22

環境溫度: 24 °C

環境濕度: 52%

Orthogonal Axis: X

Polarization: Horizontal

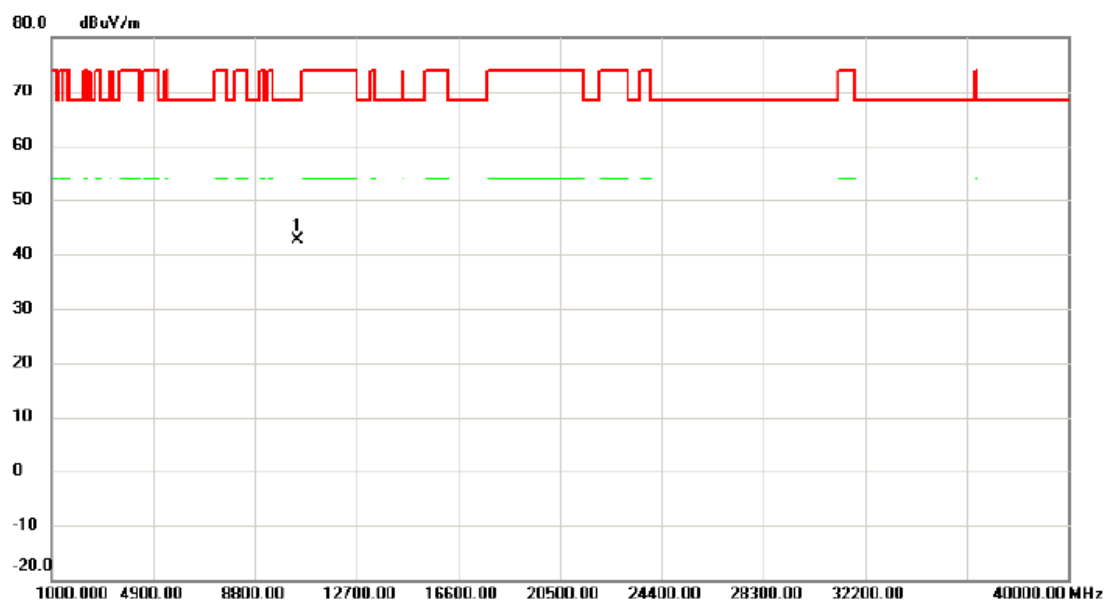


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	10423.970	28.22	14.33	42.55	68.30	-25.75	peak	

測試頻道: IEEE 802.11a / 5745 MHz
 解析頻寬: 1000 kHz / 1000 kHz
 量測天線: Horn Antenna
 檢測器: Peak/AV
 環境溫度: 24 °C

測試模式: 發射
 視頻頻寬: 1000 kHz / 10 Hz
 測試距離: 3 米
 測試日期: 108/06/21
 環境濕度: 52%

Orthogonal Axis: X

Polarization: Vertical

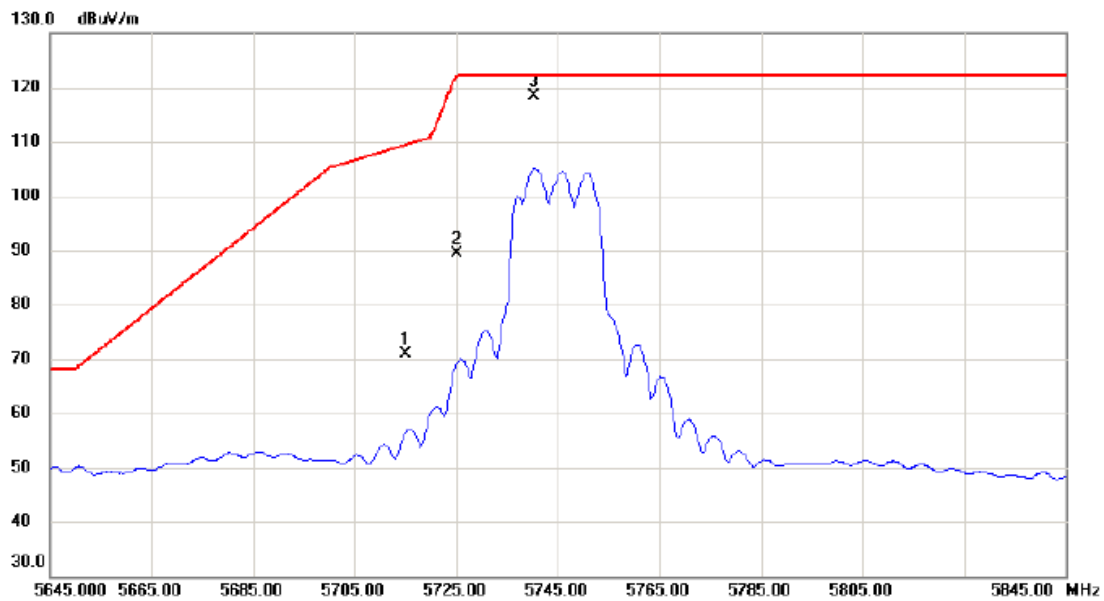


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5715.000	55.51	15.26	70.77	109.40	-38.63	peak	
2		5725.000	74.14	15.27	89.41	122.20	-32.79	peak	
3	*	5740.400	103.11	15.29	118.40	122.20	-3.80	peak	主波訊號不予判定

測試頻道: IEEE 802.11a / 5745 MHz
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢測器: Peak/AV
環境溫度: 24 °C

測試模式: 發射
視頻頻寬: 1000 kHz / 10 Hz
測試距離: 3 米
測試日期: 108/06/22
環境濕度: 52%

Orthogonal Axis: X

Polarization: Vertical

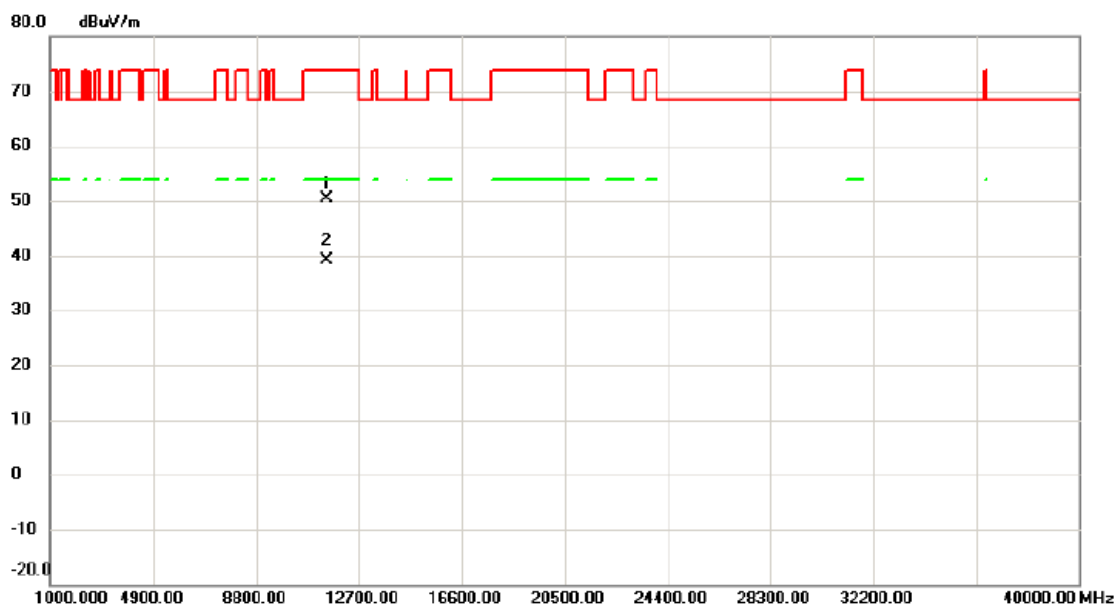


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11490.600	33.77	16.73	50.50	74.00	-23.50	peak	
2	*	11490.750	22.42	16.74	39.16	54.00	-14.84	AVG	

測試頻道: IEEE 802.11a / 5745 MHz
 解析頻寬: 1000 kHz / 1000 kHz
 量測天線: Horn Antenna
 檢測器: Peak/AV
 環境溫度: 24 °C

測試模式: 發射
 視頻頻寬: 1000 kHz / 10 Hz
 測試距離: 3 米
 測試日期: 108/06/21
 環境濕度: 52%

Orthogonal Axis: X

Polarization: Horizontal

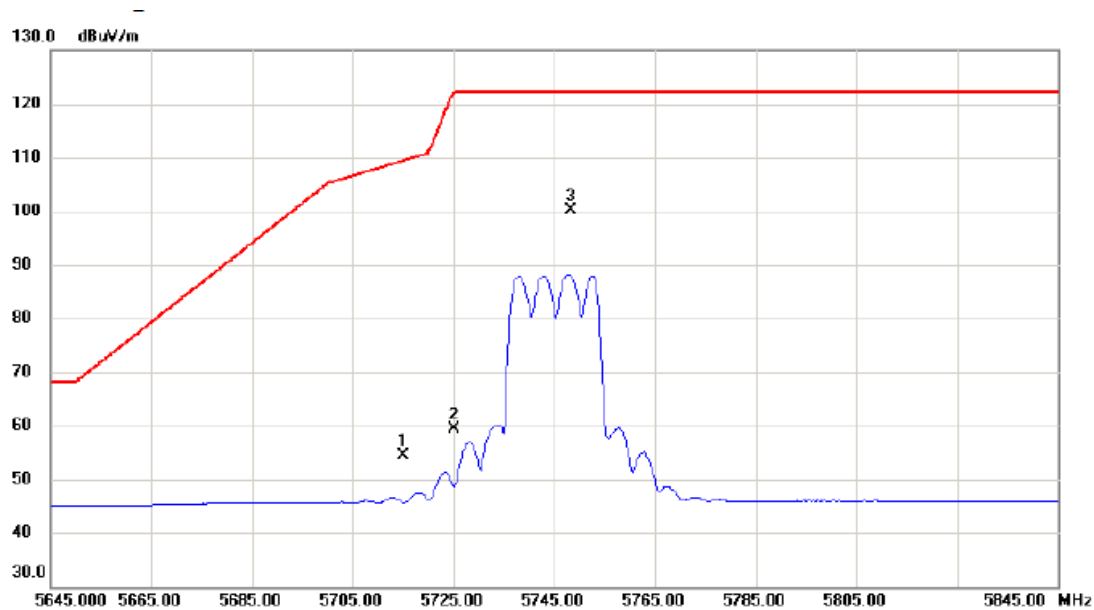


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5715.000	39.04	15.26	54.30	109.40	-55.10	peak	
2		5725.000	44.08	15.27	59.35	122.20	-62.85	peak	
3	*	5748.400	84.89	15.30	100.19	122.20	-22.01	peak	主波訊號不予判定

測試頻道: IEEE 802.11a / 5745 MHz
 解析頻寬: 1000 kHz / 1000 kHz
 量測天線: Horn Antenna
 檢測器: Peak/AV
 環境溫度: 24 °C

測試模式: 發射
 視頻頻寬: 1000 kHz / 10 Hz
 測試距離: 3 米
 測試日期: 108/06/22
 環境濕度: 52%

Orthogonal Axis: X

Polarization: Horizontal

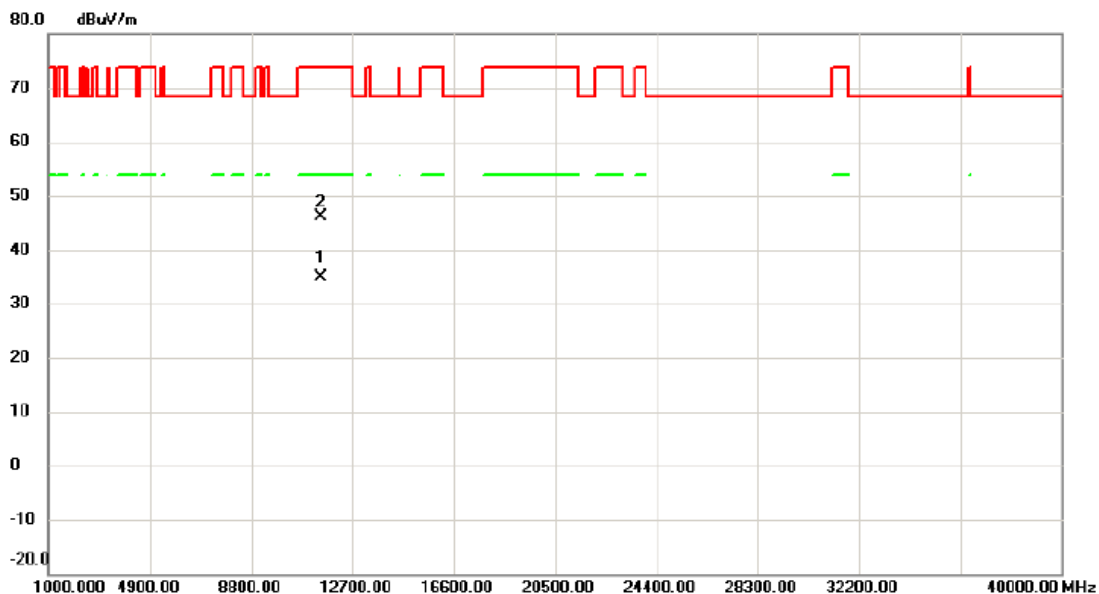


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	11490.570	18.09	16.73	34.82	54.00	-19.18	AVG	
2		11491.030	29.47	16.74	46.21	74.00	-27.79	peak	

測試頻道: IEEE 802.11a / 5785 MHz
 解析頻寬: 1000 kHz / 1000 kHz
 量測天線: Horn Antenna
 檢測器: Peak/AV
 環境溫度: 24 °C

測試模式: 發射
 視頻頻寬: 1000 kHz / 10 Hz
 測試距離: 3 米
 測試日期: 108/06/21
 環境濕度: 52%

Orthogonal Axis: X

Polarization: Vertical

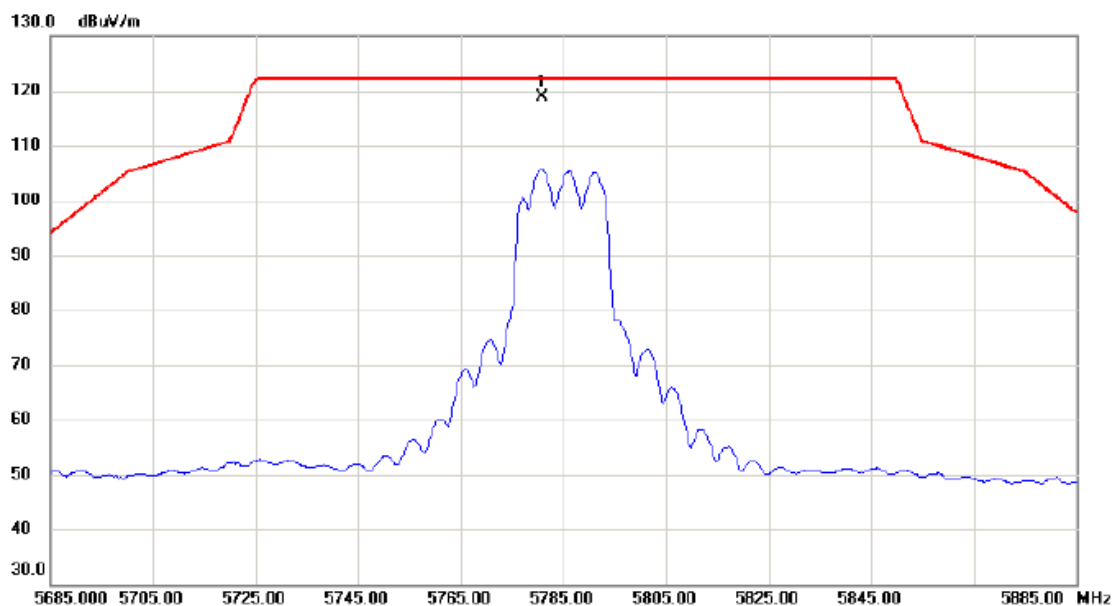


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	5780.900	103.53	15.34	118.87	122.20	-3.33	peak	主波訊號不予判定

測試頻道: IEEE 802.11a / 5785 MHz
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢測器: Peak/AV
環境溫度: 24 °C

測試模式: 發射
視頻頻寬: 1000 kHz / 10 Hz
測試距離: 3 米
測試日期: 108/06/22
環境濕度: 52%

Orthogonal Axis: X

Polarization: Vertical

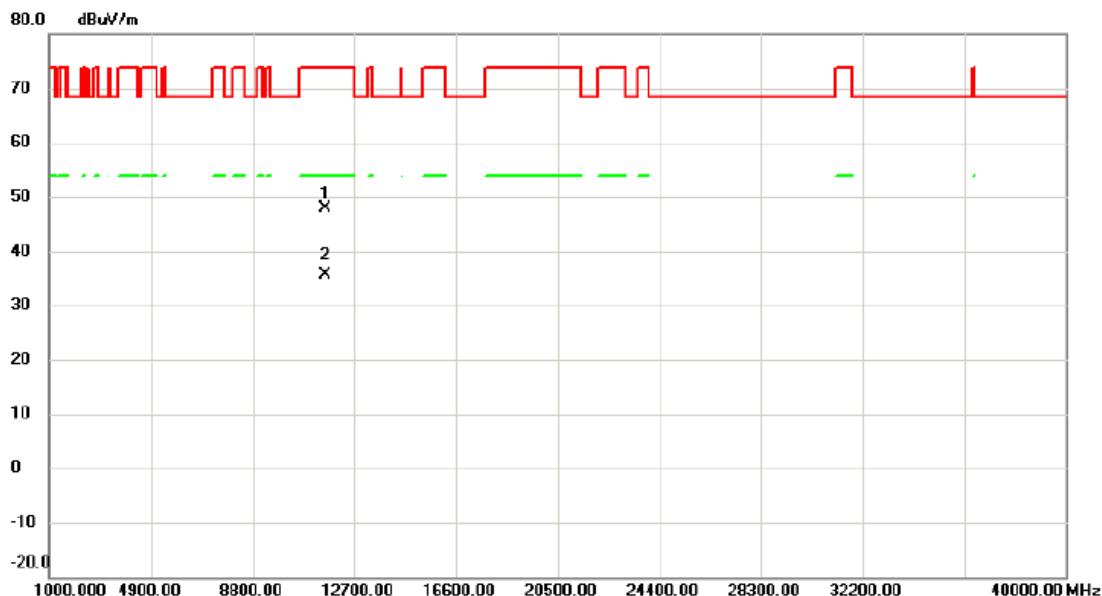


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11565.960	31.22	16.56	47.78	74.00	-26.22	peak	
2 *		11571.260	19.16	16.54	35.70	54.00	-18.30	AVG	

測試頻道: IEEE 802.11a / 5785 MHz
 解析頻寬: 1000 kHz / 1000 kHz
 量測天線: Horn Antenna
 檢測器: Peak/AV
 環境溫度: 24 °C

測試模式: 發射
 視頻頻寬: 1000 kHz / 10 Hz
 測試距離: 3 米
 測試日期: 108/06/21
 環境濕度: 52%

Orthogonal Axis: X

Polarization: Horizontal

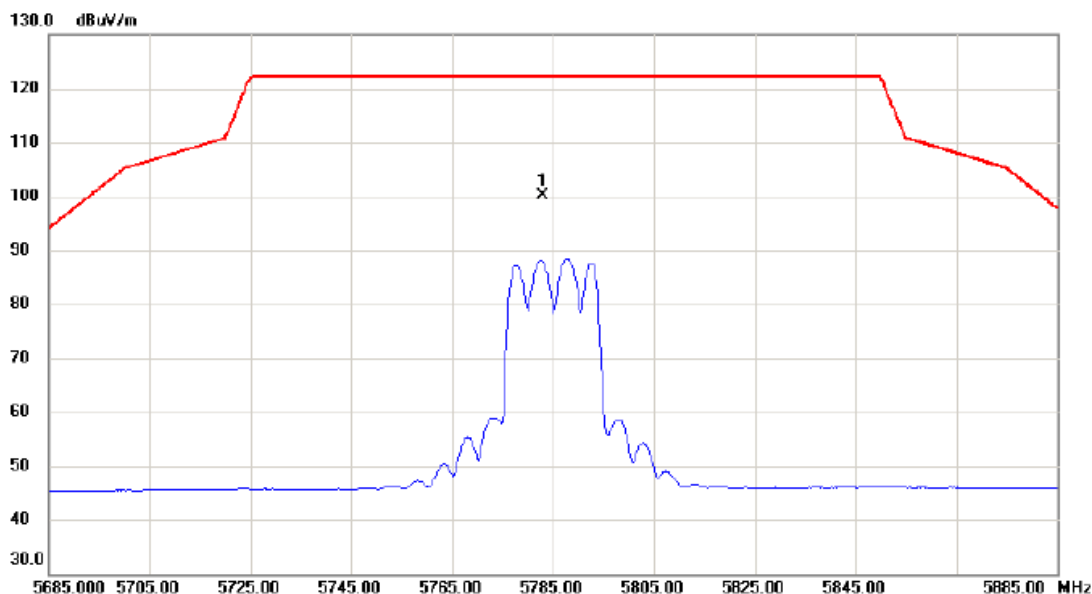


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	5782.900	84.80	15.33	100.13	122.20	-22.07	peak	主波訊號不予判定

測試頻道: IEEE 802.11a / 5785 MHz
 解析頻寬: 1000 kHz / 1000 kHz
 量測天線: Horn Antenna
 檢測器: Peak/AV
 環境溫度: 24 °C

測試模式: 發射
 視頻頻寬: 1000 kHz / 10 Hz
 測試距離: 3 米
 測試日期: 108/06/22
 環境濕度: 52%

Orthogonal Axis: X

Polarization: Horizontal

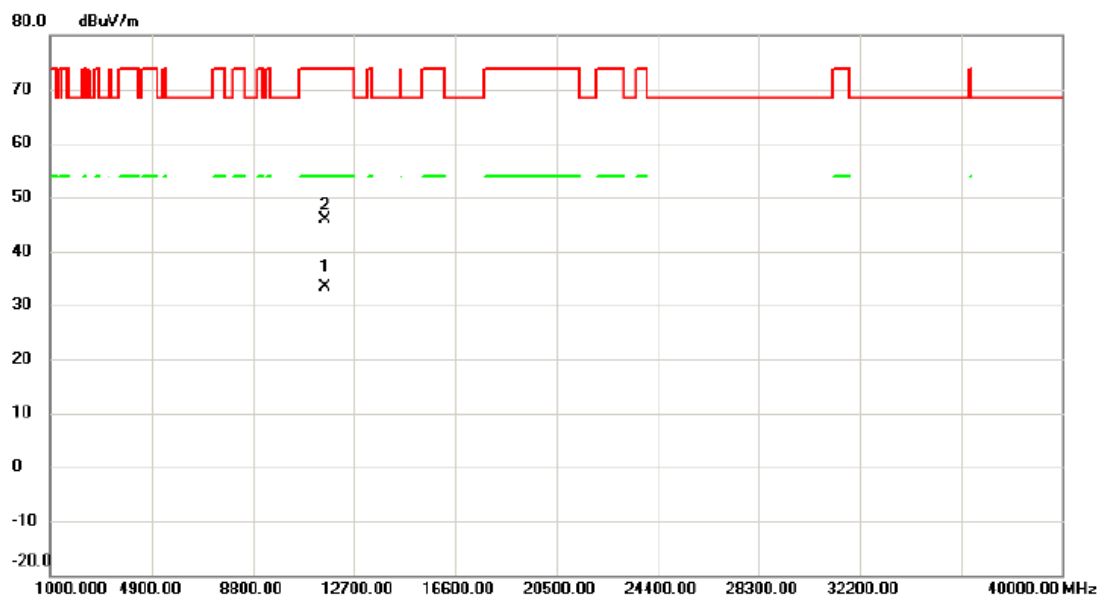


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	11566.270	16.79	16.56	33.35	54.00	-20.65	AVG	
2		11573.000	29.22	16.54	45.76	74.00	-28.24	peak	

測試頻道: IEEE 802.11a / 5825 MHz
 解析頻寬: 1000 kHz / 1000 kHz
 量測天線: Horn Antenna
 檢測器: Peak/AV
 環境溫度: 24 °C

測試模式: 發射
 視頻頻寬: 1000 kHz / 10 Hz
 測試距離: 3 米
 測試日期: 108/06/21
 環境濕度: 52%

Orthogonal Axis: X

Polarization: Vertical

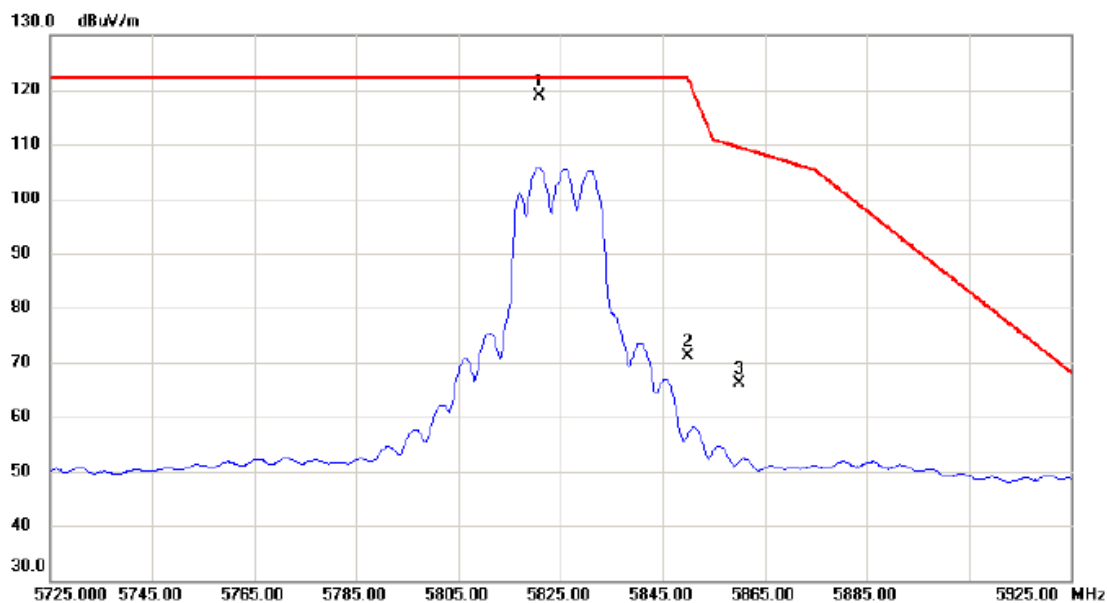


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	5820.900	103.53	15.39	118.92	122.20	-3.28	peak	主波訊號不予判定
2		5850.000	55.63	15.43	71.06	122.20	-51.14	peak	
3		5860.000	50.57	15.44	66.01	109.40	-43.39	peak	

測試頻道: IEEE 802.11a / 5825 MHz
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢測器: Peak/AV
環境溫度: 24 °C

測試模式: 發射
視頻頻寬: 1000 kHz / 10 Hz
測試距離: 3 米
測試日期: 108/06/22
環境濕度: 52%

Orthogonal Axis: X

Polarization: Vertical

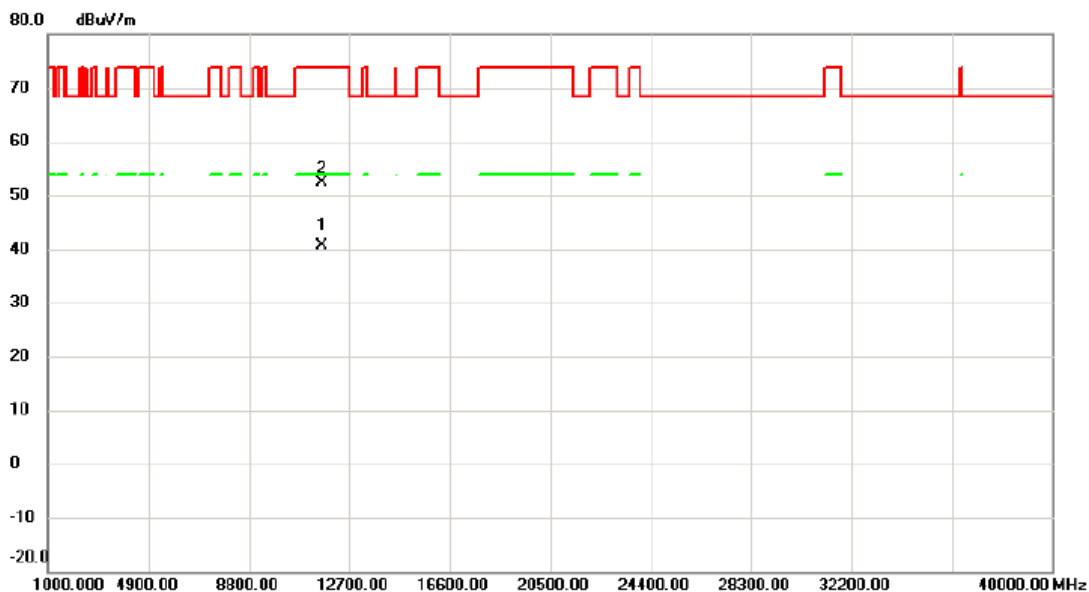


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	11650.590	24.38	16.32	40.70	54.00	-13.30	AVG	
2		11650.690	35.94	16.32	52.26	74.00	-21.74	peak	

測試頻道: IEEE 802.11a / 5825 MHz
 解析頻寬: 1000 kHz / 1000 kHz
 量測天線: Horn Antenna
 檢測器: Peak/AV
 環境溫度: 24 °C

測試模式: 發射
 視頻頻寬: 1000 kHz / 10 Hz
 測試距離: 3 米
 測試日期: 108/06/21
 環境濕度: 52%

Orthogonal Axis: X

Polarization: Horizontal

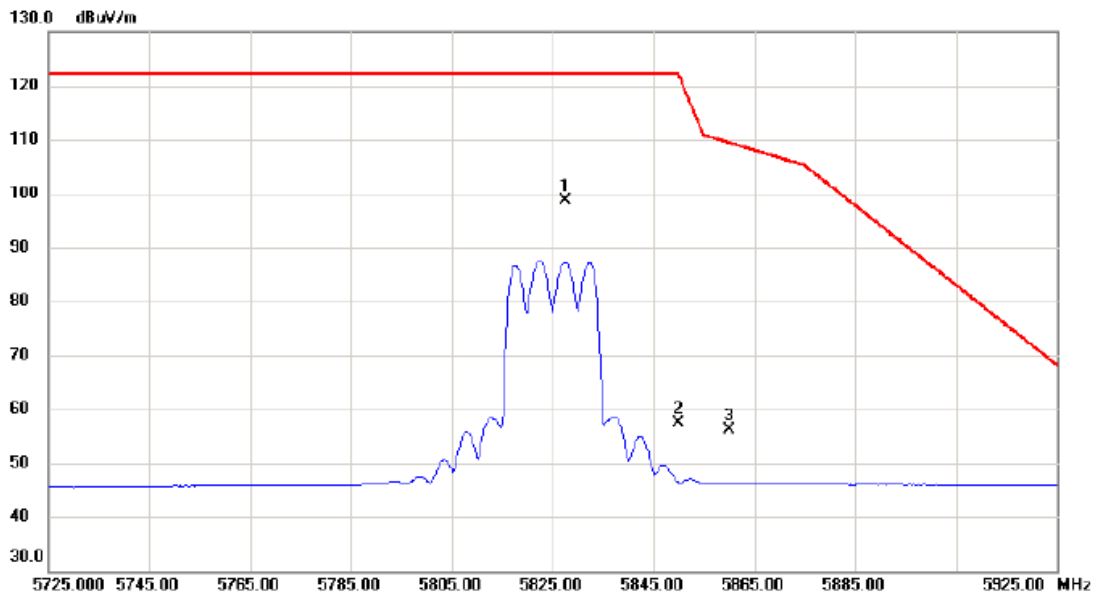


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	5827.500	83.33	15.40	98.73	122.20	-23.47	peak	主波訊號不予判定
2		5850.000	42.04	15.43	57.47	122.20	-64.73	peak	
3		5860.000	40.65	15.44	56.09	109.40	-53.31	peak	

測試頻道: IEEE 802.11a / 5825 MHz
 解析頻寬: 1000 kHz / 1000 kHz
 量測天線: Horn Antenna
 檢測器: Peak/AV
 環境溫度: 24 °C

測試模式: 發射
 視頻頻寬: 1000 kHz / 10 Hz
 測試距離: 3 米
 測試日期: 108/06/21
 環境濕度: 52%

Orthogonal Axis: X

Polarization: Horizontal

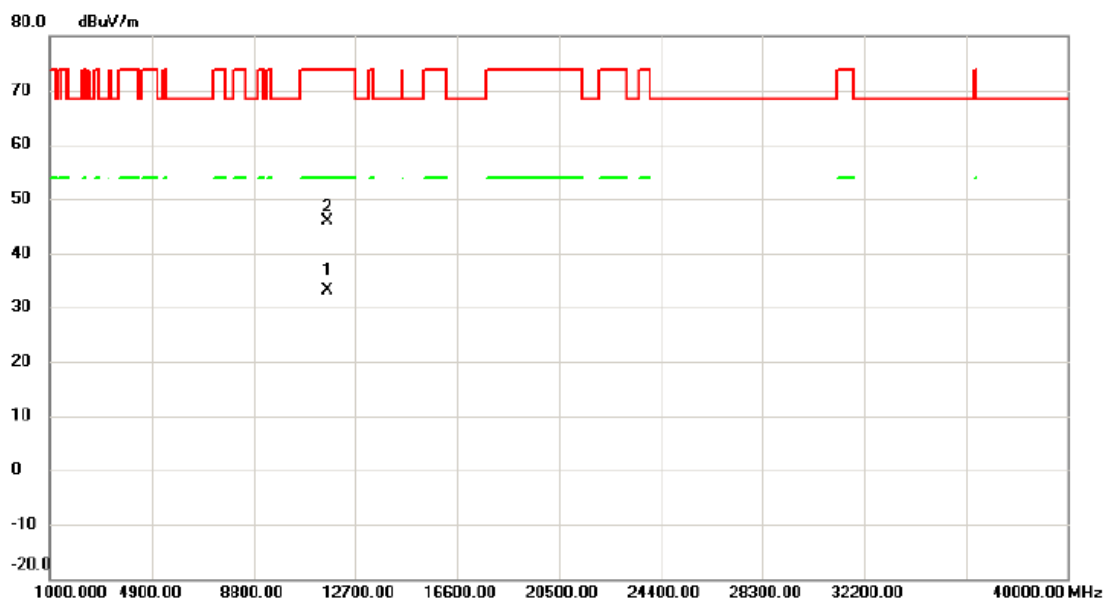


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	11649.900	16.77	16.32	33.09	54.00	-20.91	AVG	
2		11653.820	29.49	16.31	45.80	74.00	-28.20	peak	

測試頻道: IEEE 802.11ac (VHT20) /
5745 MHz
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢測器: Peak/AV
環境溫度: 24 °C

測試模式: 發射
視頻頻寬: 1000 kHz / 10 Hz
測試距離: 3 米
測試日期: 108/06/21
環境濕度: 52%

Orthogonal Axis: X

Polarization: Vertical

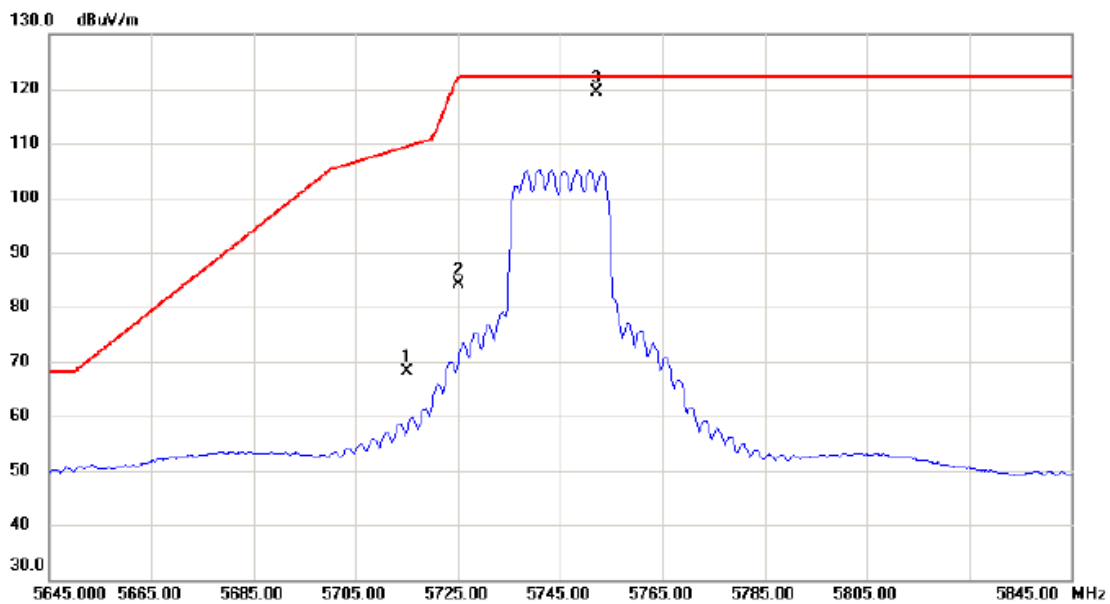


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5715.000	52.87	15.26	68.13	109.40	-41.27	peak	
2		5725.000	68.92	15.27	84.19	122.20	-38.01	peak	
3	*	5752.100	104.08	15.30	119.38	122.20	-2.82	peak	主波訊號不予判定

測試頻道: IEEE 802.11ac (VHT20) /
5745 MHz
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢測器: Peak/AV
環境溫度: 24 °C

測試模式: 發射
視頻頻寬: 1000 kHz / 10 Hz
測試距離: 3 米
測試日期: 108/06/22
環境濕度: 52%

Orthogonal Axis: X

Polarization: Vertical

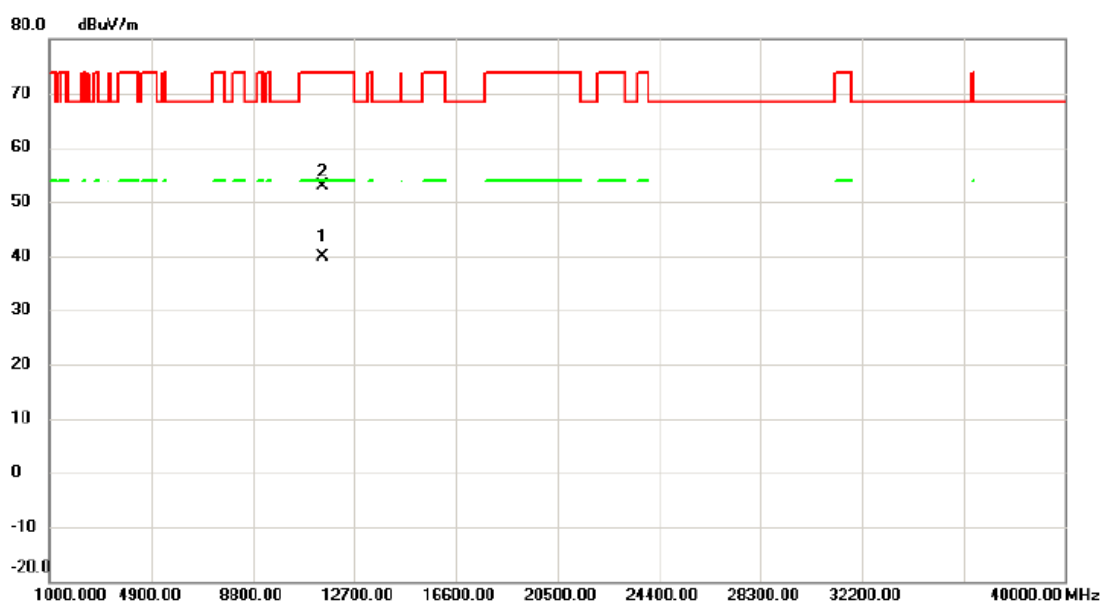


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	11490.230	23.21	16.73	39.94	54.00	-14.06	AVG	
2		11490.750	36.12	16.74	52.86	74.00	-21.14	peak	

測試頻道: IEEE 802.11ac (VHT20) /
5745 MHz
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢測器: Peak/AV
環境溫度: 24 °C

測試模式: 發射
視頻頻寬: 1000 kHz / 10 Hz
測試距離: 3 米
測試日期: 108/06/21
環境濕度: 52%

Orthogonal Axis: X

Polarization: Horizontal

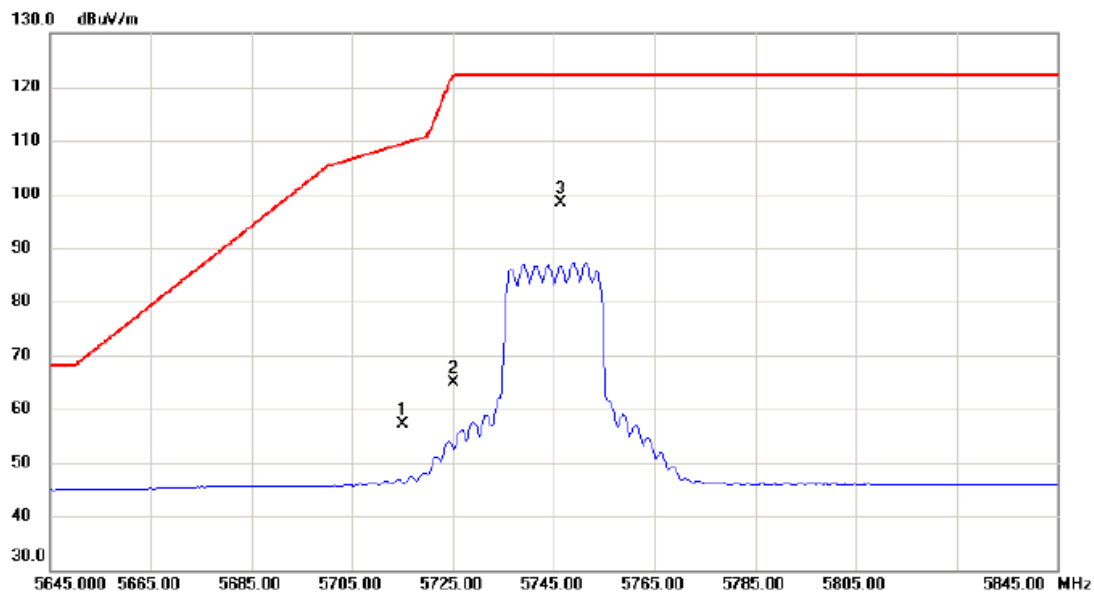

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5715.000	41.98	15.26	57.24	109.40	-52.16	peak	
2		5725.000	49.58	15.27	64.85	122.20	-57.35	peak	
3	*	5746.400	82.98	15.30	98.28	122.20	-23.92	peak	主波訊號不予判定

測試頻道: IEEE 802.11ac (VHT20) /
5745 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢測器: Peak/AV


測試日期: 108/06/22

環境溫度: 24 °C

環境濕度: 52%

Orthogonal Axis: X

Polarization: Horizontal

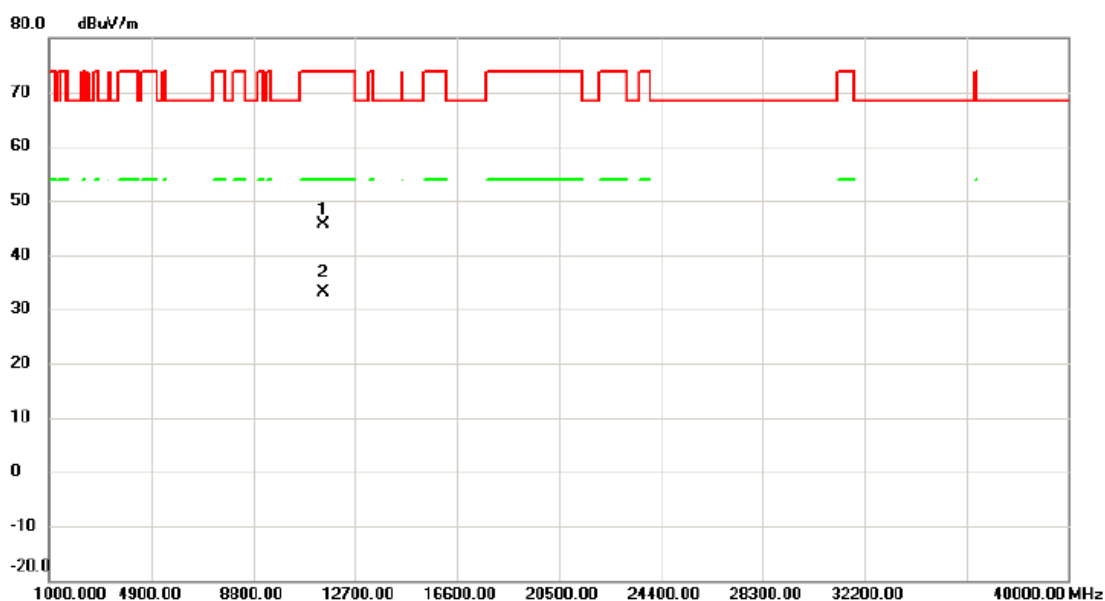

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11485.580	28.89	16.73	45.62	74.00	-28.38	peak	
2	*	11490.360	16.51	16.73	33.24	54.00	-20.76	AVG	

測試頻道: IEEE 802.11ac (VHT20) /
5785 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢測器: Peak/AV


測試日期: 108/06/21

環境溫度: 24 °C

環境濕度: 52%

Orthogonal Axis: X

Polarization: Vertical

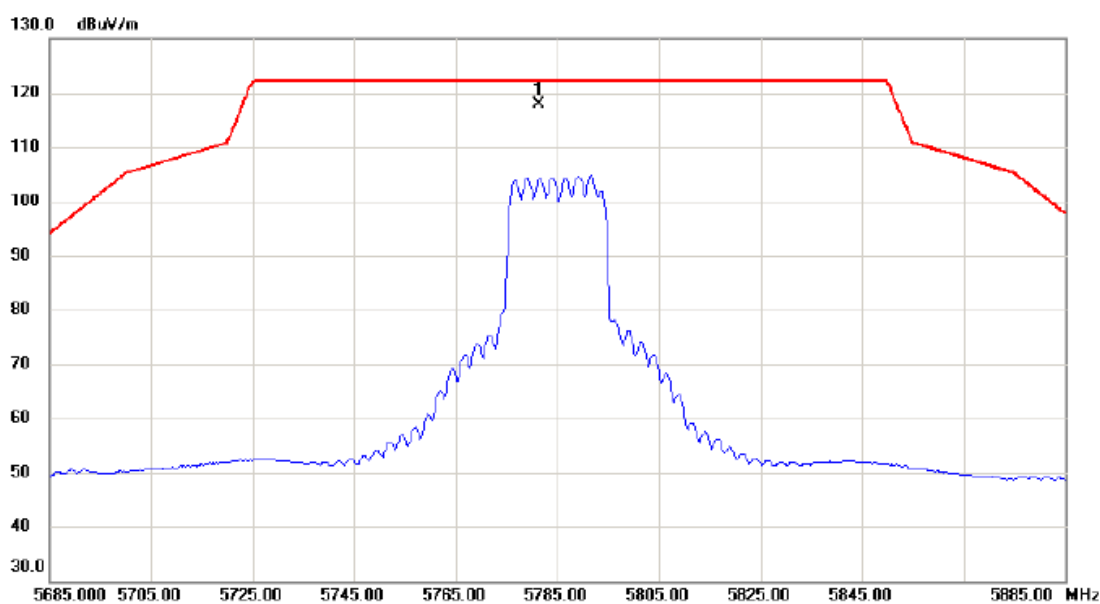

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	5781.400	102.46	15.34	117.80	122.20	-4.40	peak	主波訊號不予判定

測試頻道: IEEE 802.11ac (VHT20) /
5785 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢測器: Peak/AV


測試日期: 108/06/22

環境溫度: 24 °C

環境濕度: 52%

Orthogonal Axis: X

Polarization: Vertical

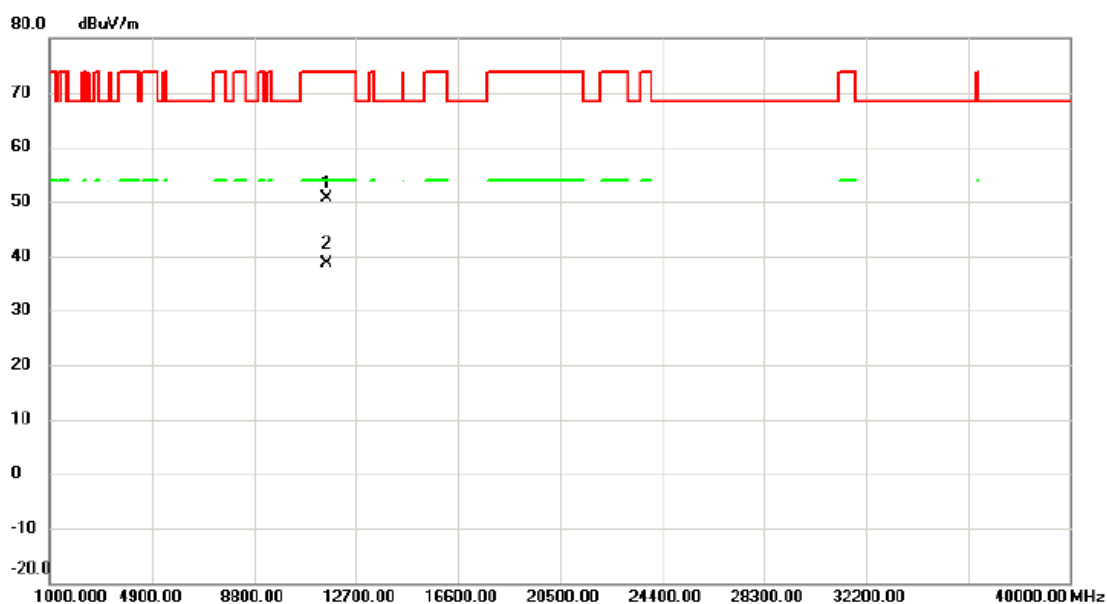


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11570.470	33.97	16.55	50.52	74.00	-23.48	peak	
2	*	11570.590	22.15	16.55	38.70	54.00	-15.30	AVG	

測試頻道: IEEE 802.11ac (VHT20) /
5785 MHz
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢測器: Peak/AV
環境溫度: 24 °C

測試模式: 發射
視頻頻寬: 1000 kHz / 10 Hz
測試距離: 3 米
測試日期: 108/06/21
環境濕度: 52%

Orthogonal Axis: X

Polarization: Horizontal

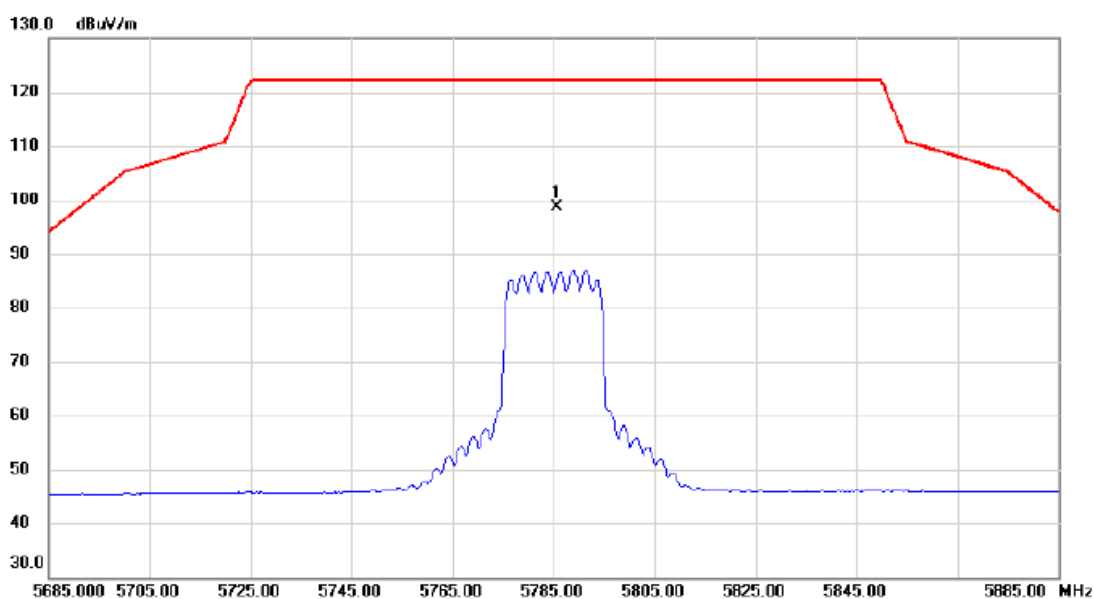

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	5785.600	83.29	15.35	98.64	122.20	-23.56	peak	主波訊號不予判定

測試頻道: IEEE 802.11ac (VHT20) /
5785 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢測器: Peak/AV


測試日期: 108/06/22

環境溫度: 24 °C

環境濕度: 52%

Orthogonal Axis: X

Polarization: Horizontal

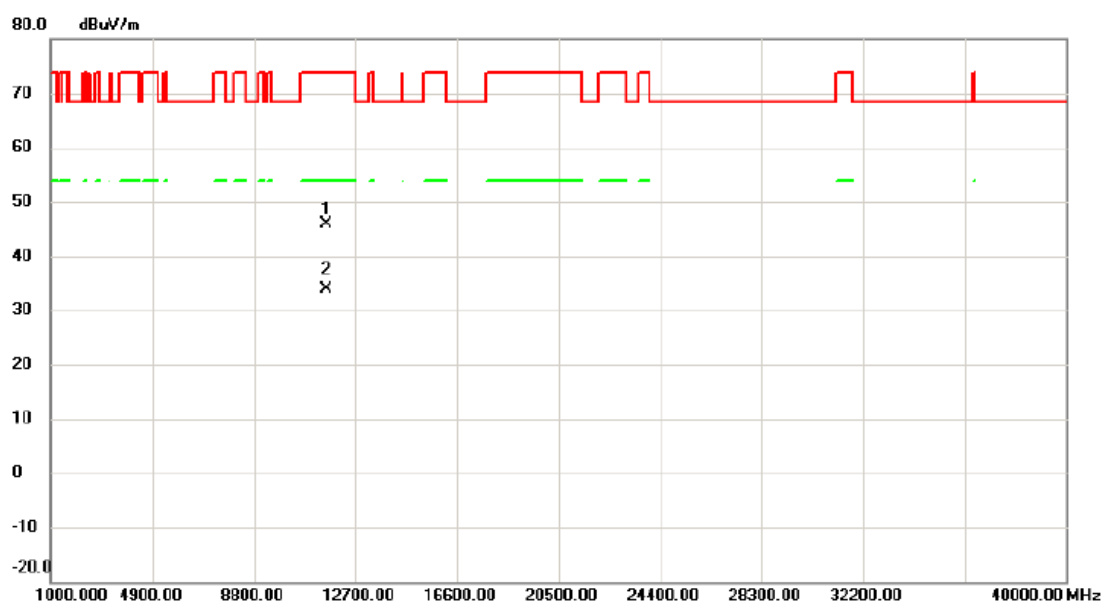


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11567.810	29.41	16.55	45.96	74.00	-28.04	peak	
2 *		11570.350	17.38	16.55	33.93	54.00	-20.07	AVG	

測試頻道: IEEE 802.11ac (VHT20) /
5825 MHz
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢測器: Peak/AV
環境溫度: 24 °C

測試模式: 發射
視頻頻寬: 1000 kHz / 10 Hz
測試距離: 3 米
測試日期: 108/06/21
環境濕度: 52%

Orthogonal Axis: X

Polarization: Vertical

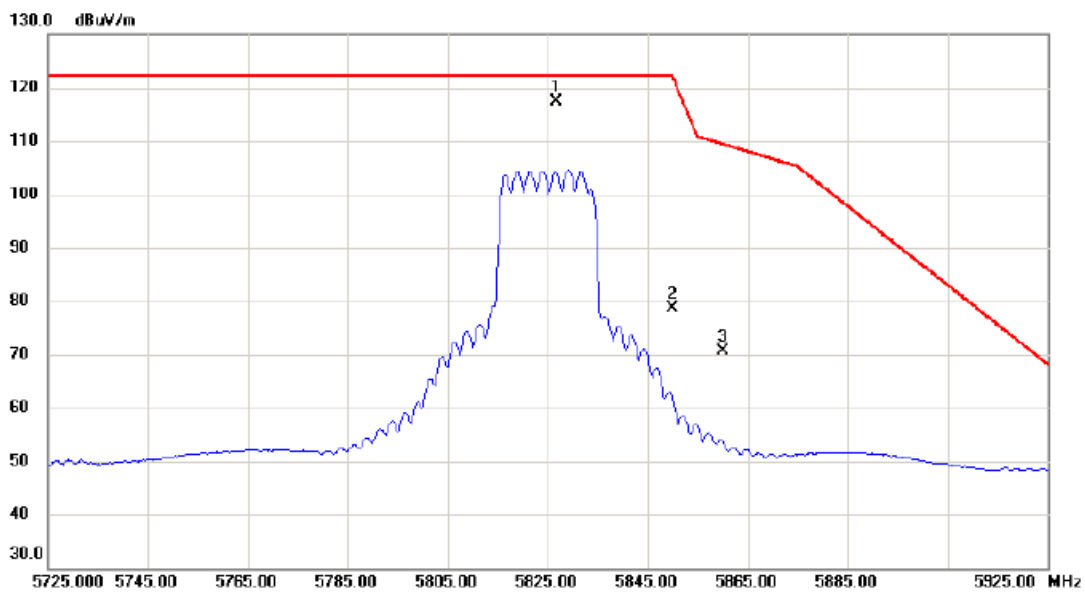


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	5826.600	101.88	15.40	117.28	122.20	-4.92	peak	主波訊號不予判定
2		5850.000	63.13	15.43	78.56	122.20	-43.64	peak	
3		5860.000	55.11	15.44	70.55	109.40	-38.85	peak	

測試頻道: IEEE 802.11ac (VHT20) /
5825 MHz
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢測器: Peak/AV
環境溫度: 24 °C

測試模式: 發射
視頻頻寬: 1000 kHz / 10 Hz
測試距離: 3 米
測試日期: 108/06/22
環境濕度: 52%

Orthogonal Axis: X

Polarization: Vertical

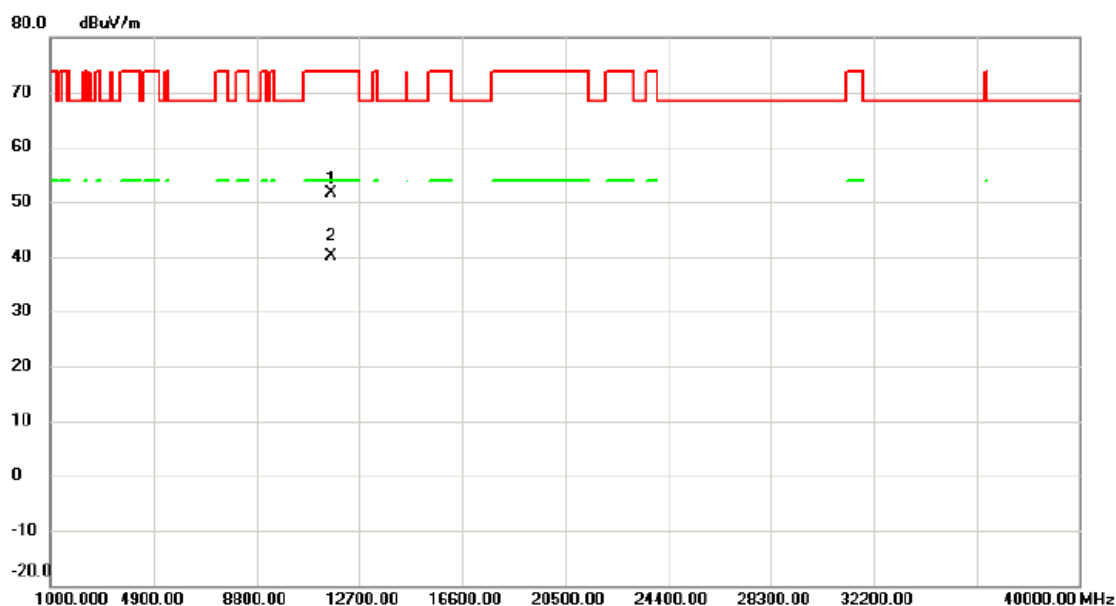

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11646.610	35.38	16.33	51.71	74.00	-22.29	peak	
2 *		11650.430	23.73	16.32	40.05	54.00	-13.95	AVG	

測試頻道: IEEE 802.11ac (VHT20) /
5825 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢測器: Peak/AV


測試日期: 108/06/21

環境溫度: 24 °C

環境濕度: 52%

Orthogonal Axis: X

Polarization: Horizontal

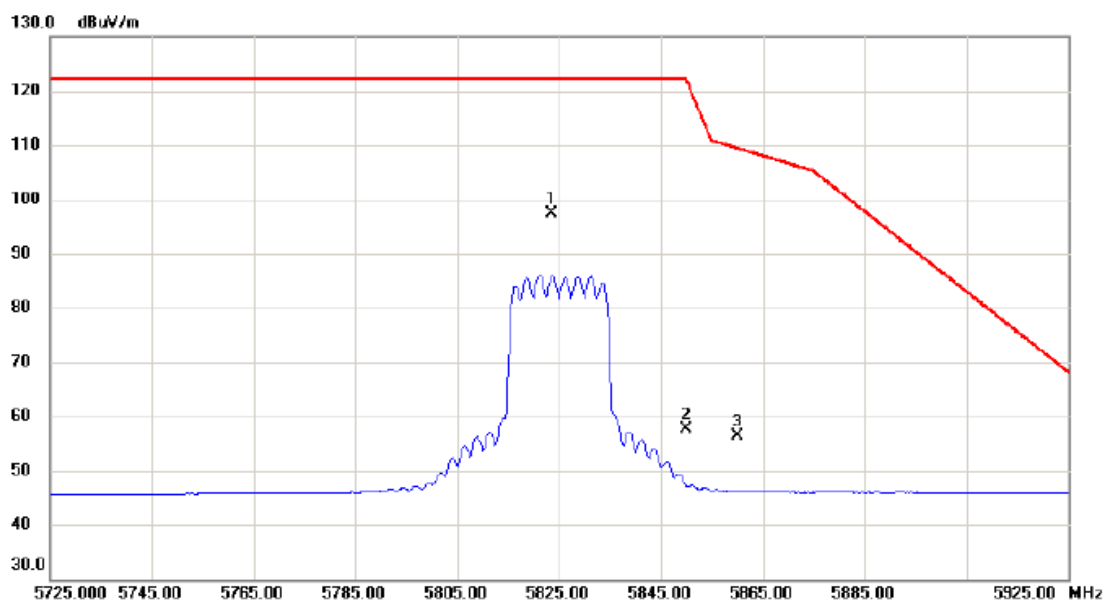

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	5823.600	81.95	15.39	97.34	122.20	-24.86	peak	主波訊號不予判定
2		5850.000	42.29	15.43	57.72	122.20	-64.48	peak	
3		5860.000	40.96	15.44	56.40	109.40	-53.00	peak	

測試頻道: IEEE 802.11ac (VHT20) /
5825 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢測器: Peak/AV


測試日期: 108/06/22

環境溫度: 24 °C

環境濕度: 52%

Orthogonal Axis: X

Polarization: Horizontal

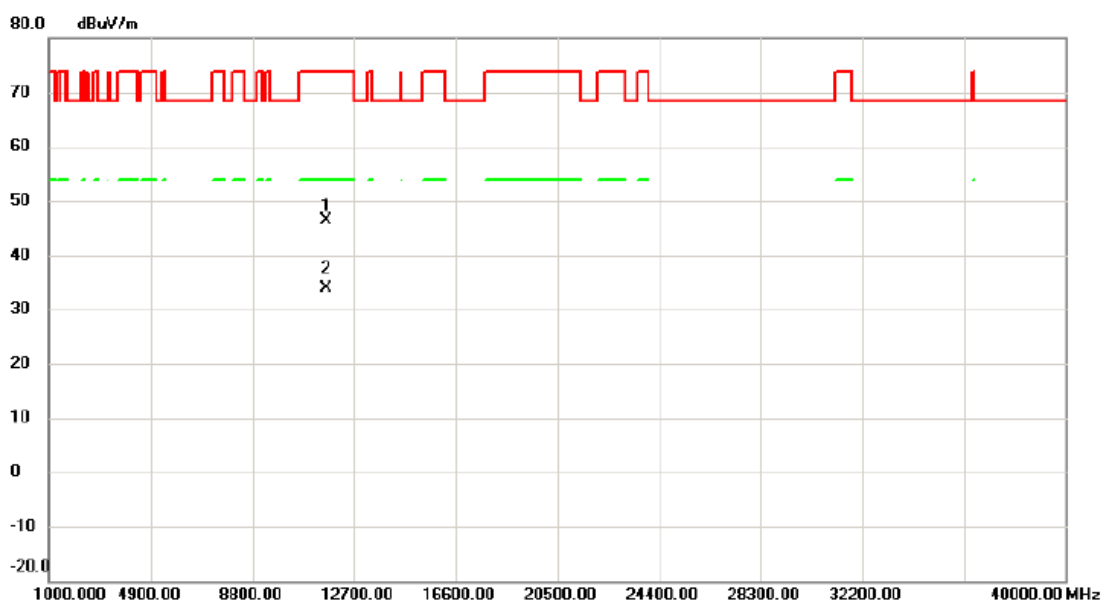


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11647.620	29.95	16.33	46.28	74.00	-27.72	peak	
2	*	11647.920	17.66	16.33	33.99	54.00	-20.01	AVG	

測試頻道: IEEE 802.11ac (VHT40) /
5755 MHz
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢測器: Peak/AV
環境溫度: 24 °C

測試模式: 發射
視頻頻寬: 1000 kHz / 10 Hz
測試距離: 3 米
測試日期: 108/06/21
環境濕度: 52%

Orthogonal Axis: X

Polarization: Vertical

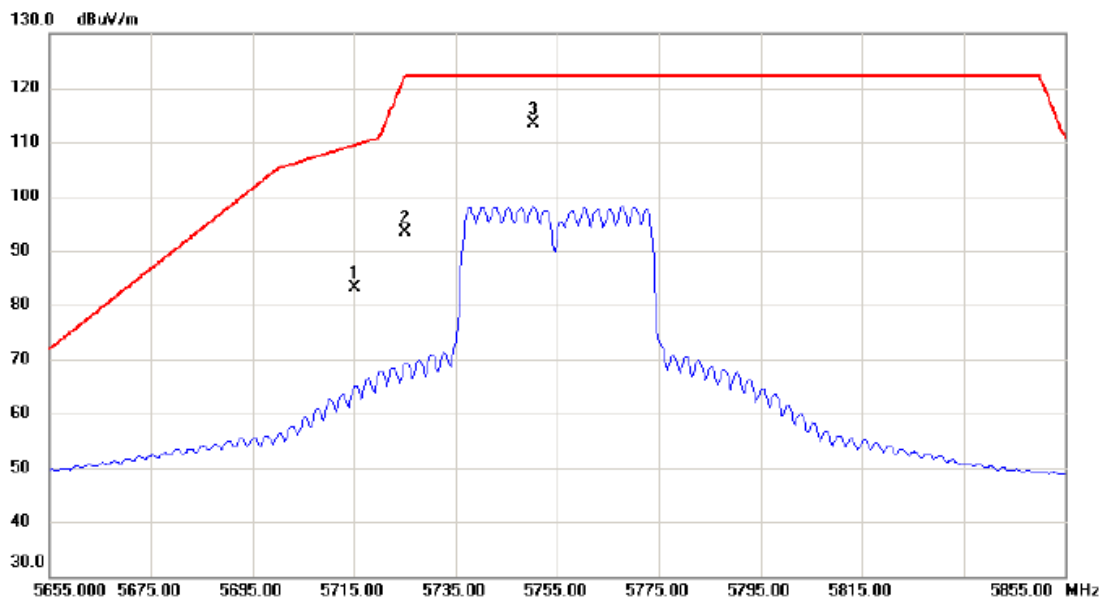

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5715.000	67.97	15.26	83.23	109.40	-26.17	peak	
2		5725.000	78.21	15.27	93.48	122.20	-28.72	peak	
3	*	5750.400	97.99	15.30	113.29	122.20	-8.91	peak	主波訊號不予判定

測試頻道: IEEE 802.11ac (VHT40) /
5755 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢測器: Peak/AV


測試日期: 108/06/22

環境溫度: 24 °C

環境濕度: 52%

Orthogonal Axis: X

Polarization: Vertical

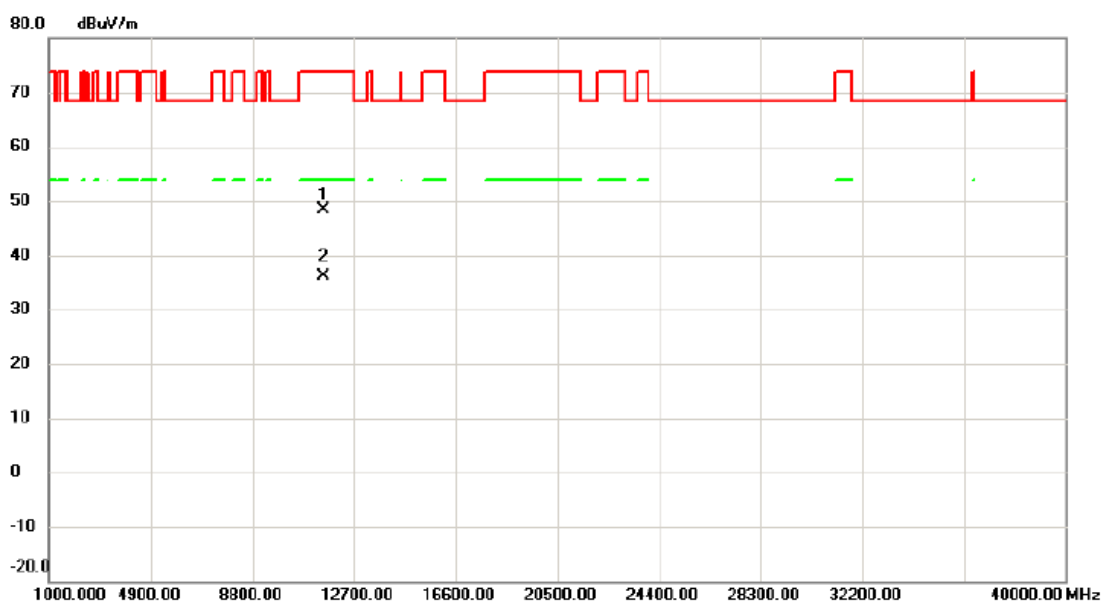

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11510.450	31.61	16.72	48.33	74.00	-25.67	peak	
2	*	11517.230	19.55	16.70	36.25	54.00	-17.75	AVG	

測試頻道: IEEE 802.11ac (VHT40) /
5755 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢測器: Peak/AV


測試日期: 108/06/21

環境溫度: 24 °C

環境濕度: 52%

Orthogonal Axis: X

Polarization: Horizontal

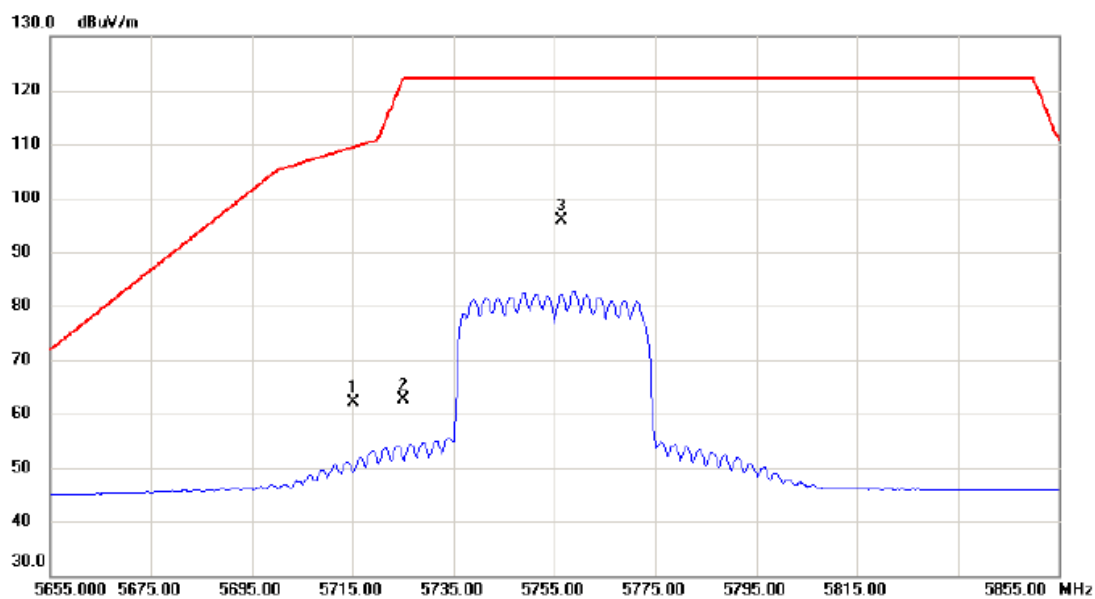

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5715.000	46.93	15.26	62.19	109.40	-47.21	peak	
2		5725.000	47.35	15.27	62.62	122.20	-59.58	peak	
3	*	5756.400	80.62	15.31	95.93	122.20	-26.27	peak	主波訊號不予判定

測試頻道: IEEE 802.11ac (VHT40) /
5755 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢測器: Peak/AV


測試日期: 108/06/22

環境溫度: 24 °C

環境濕度: 52%

Orthogonal Axis: X

Polarization: Horizontal

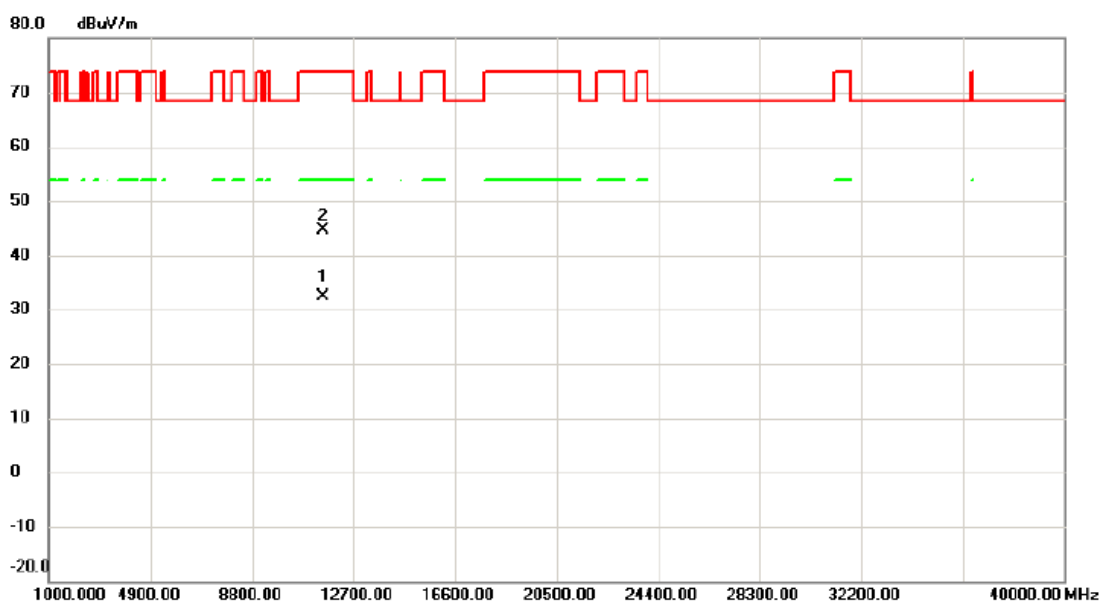


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	11510.320	15.58	16.72	32.30	54.00	-21.70	AVG	
2		11518.820	28.03	16.69	44.72	74.00	-29.28	peak	

測試頻道: IEEE 802.11ac (VHT40) /
5795 MHz
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢測器: Peak/AV
環境溫度: 24 °C

測試模式: 發射
視頻頻寬: 1000 kHz / 10 Hz
測試距離: 3 米
測試日期: 108/06/21
環境濕度: 52%

Orthogonal Axis: X

Polarization: Vertical

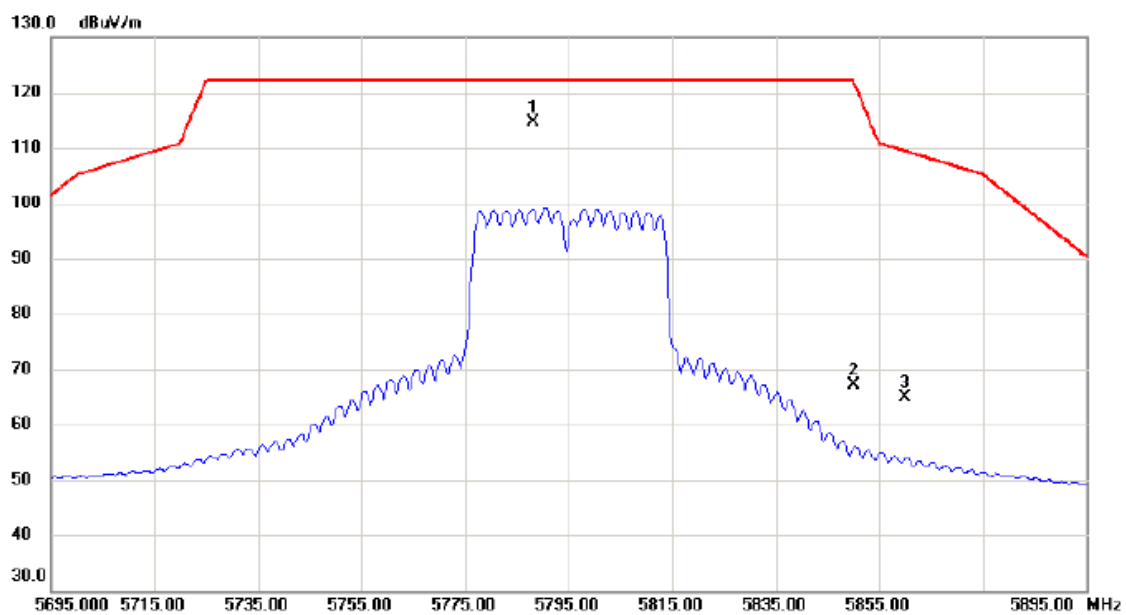

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	5788.100	99.22	15.35	114.57	122.20	-7.63	peak	主波訊號不予判定
2		5850.000	51.76	15.43	67.19	122.20	-55.01	peak	
3		5860.000	49.53	15.44	64.97	109.40	-44.43	peak	

測試頻道: IEEE 802.11ac (VHT40) /
5795 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢測器: Peak/AV


測試日期: 108/06/22

環境溫度: 24 °C

環境濕度: 52%

Orthogonal Axis: X

Polarization: Vertical

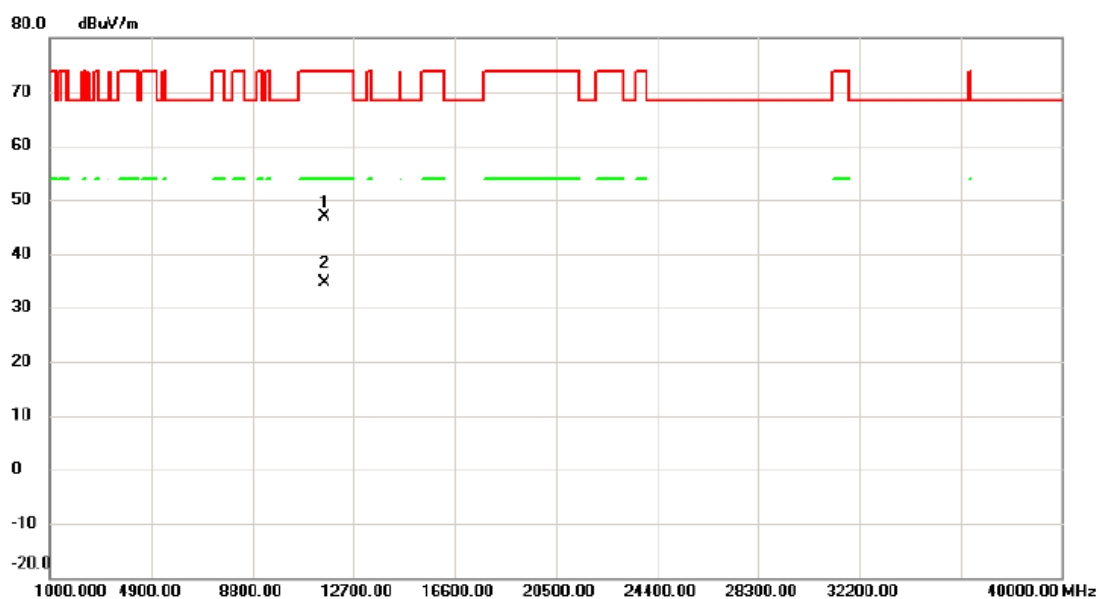

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11590.430	30.48	16.48	46.96	74.00	-27.04	peak	
2	*	11591.080	18.16	16.48	34.64	54.00	-19.36	AVG	

測試頻道: IEEE 802.11ac (VHT40) / 5795 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢測器: Peak/AV


測試日期: 108/06/21

環境溫度: 24 °C

環境濕度: 52%

Orthogonal Axis: X

Polarization: Horizontal

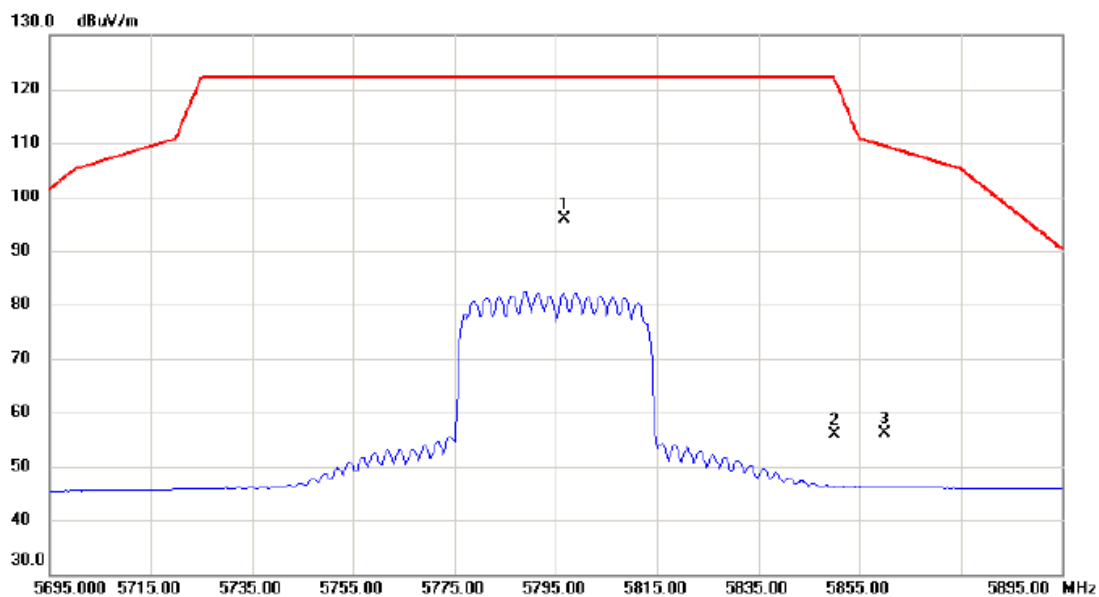

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	5796.600	80.50	15.37	95.87	122.20	-26.33	peak	主波訊號不予判定
2		5850.000	40.34	15.43	55.77	122.20	-66.43	peak	
3		5860.000	40.81	15.44	56.25	109.40	-53.15	peak	

測試頻道: IEEE 802.11ac (VHT40) /
5795 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢測器: Peak/AV


測試日期: 108/06/22

環境溫度: 24 °C

環境濕度: 52%

Orthogonal Axis: X

Polarization: Horizontal

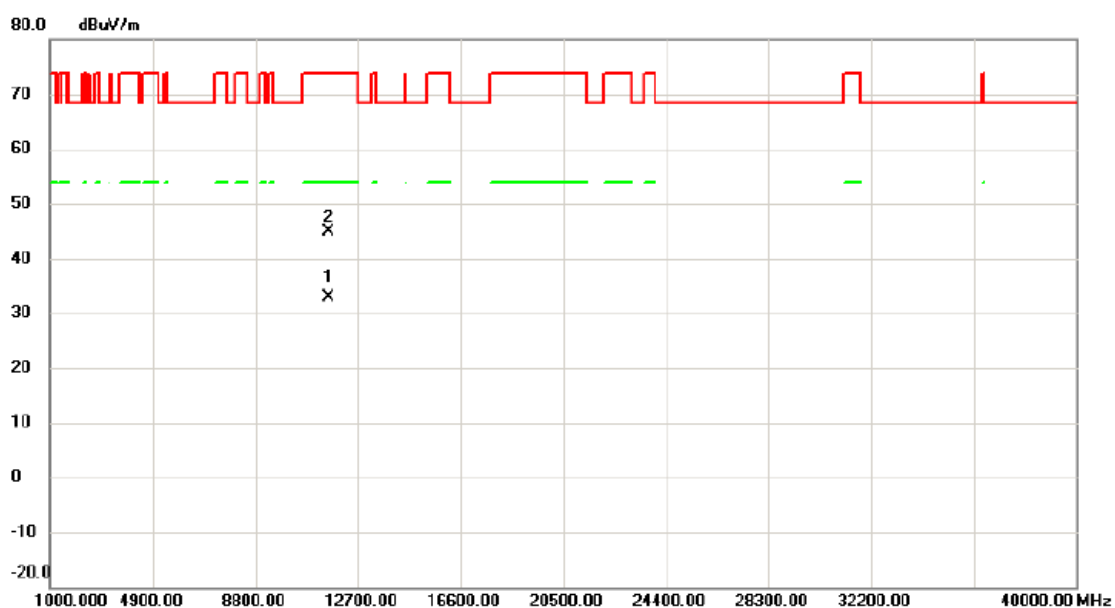


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	11588.560	16.31	16.49	32.80	54.00	-21.20	AVG	
2		11594.390	28.37	16.48	44.85	74.00	-29.15	peak	

測試頻道: IEEE 802.11ac (VHT80) /
5775 MHz
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢測器: Peak/AV
環境溫度: 24 °C

測試模式: 發射
視頻頻寬: 1000 kHz / 10 Hz
測試距離: 3 米
測試日期: 108/06/21
環境濕度: 52%

Orthogonal Axis: X

Polarization: Vertical

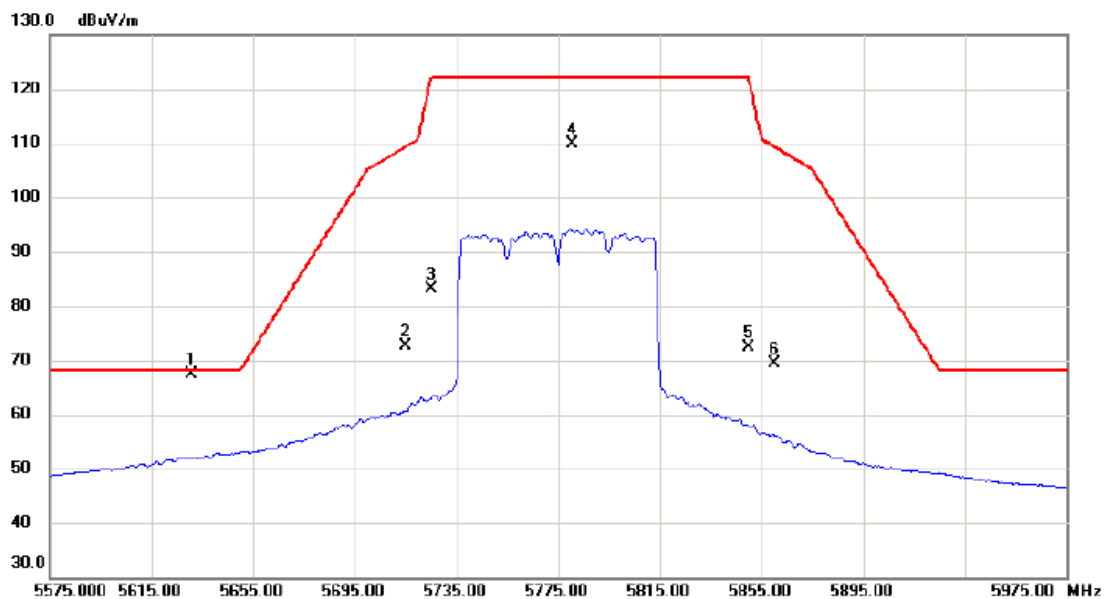

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	5630.800	52.34	15.15	67.49	68.20	-0.71	peak	
2		5715.000	57.46	15.26	72.72	109.40	-36.68	peak	
3		5725.000	67.92	15.27	83.19	122.20	-39.01	peak	
4		5780.800	94.66	15.34	110.00	122.20	-12.20	peak	主波訊號不予判定
5		5850.000	56.90	15.43	72.33	122.20	-49.87	peak	
6		5860.000	53.87	15.44	69.31	109.40	-40.09	peak	

測試頻道: IEEE 802.11ac (VHT80) /
5775 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢測器: Peak/AV


測試日期: 108/06/22

環境溫度: 24 °C

環境濕度: 52%

Orthogonal Axis: X

Polarization: Vertical

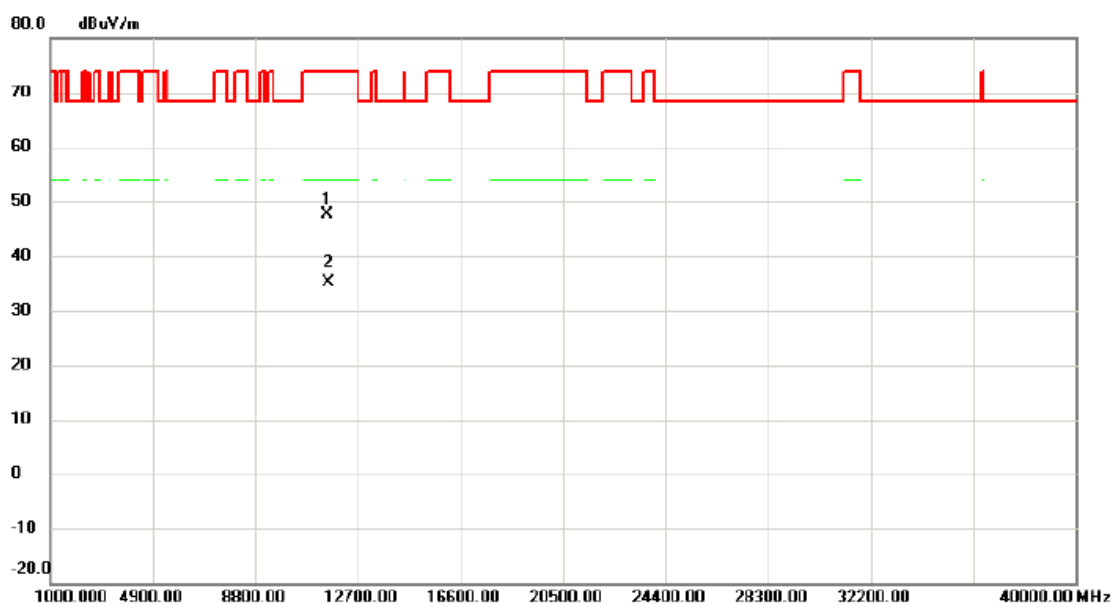


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11549.270	31.09	16.61	47.70	74.00	-26.30	peak	
2 *		11560.000	18.57	16.58	35.15	54.00	-18.85	AVG	

測試頻道: IEEE 802.11ac (VHT80) /
5775 MHz
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢測器: Peak/AV
環境溫度: 24 °C

測試模式: 發射
視頻頻寬: 1000 kHz / 10 Hz
測試距離: 3 米
測試日期: 108/06/21
環境濕度: 52%

Orthogonal Axis: X

Polarization: Horizontal

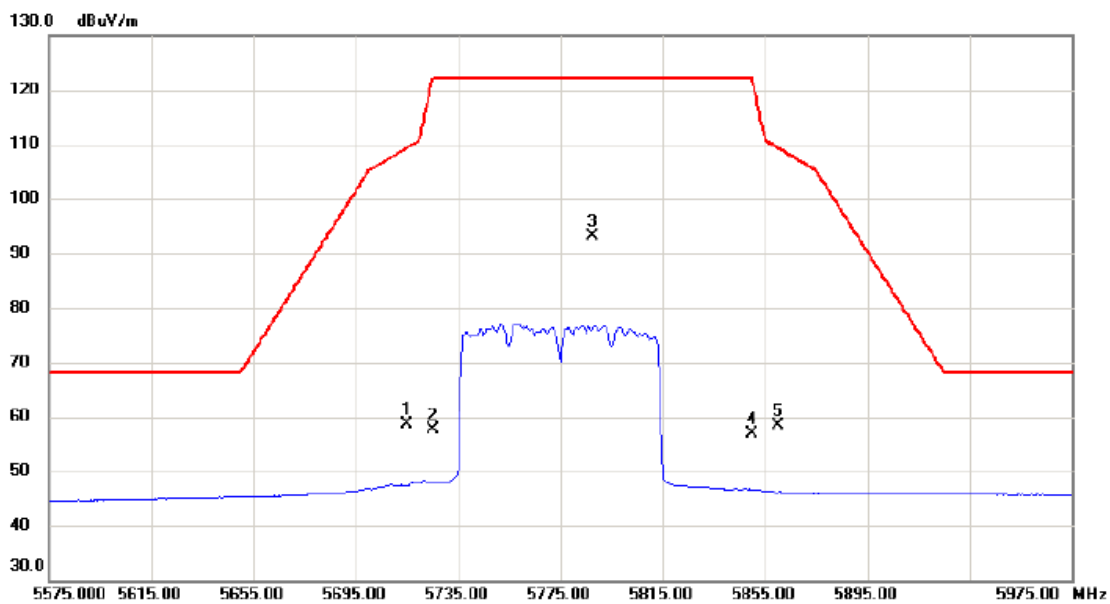


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5715.000	43.40	15.26	58.66	109.40	-50.74	peak	
2		5725.000	42.43	15.27	57.70	122.20	-64.50	peak	
3	*	5787.600	77.77	15.35	93.12	122.20	-29.08	peak	主波訊號不予判定
4		5850.000	41.48	15.43	56.91	122.20	-65.29	peak	
5		5860.000	42.82	15.44	58.26	109.40	-51.14	peak	

測試頻道: IEEE 802.11ac (VHT80) /
5775 MHz
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢測器: Peak/AV
環境溫度: 24 °C

測試模式: 發射
視頻頻寬: 1000 kHz / 10 Hz
測試距離: 3 米
測試日期: 108/06/22
環境濕度: 52%

Orthogonal Axis: X

Polarization: Horizontal

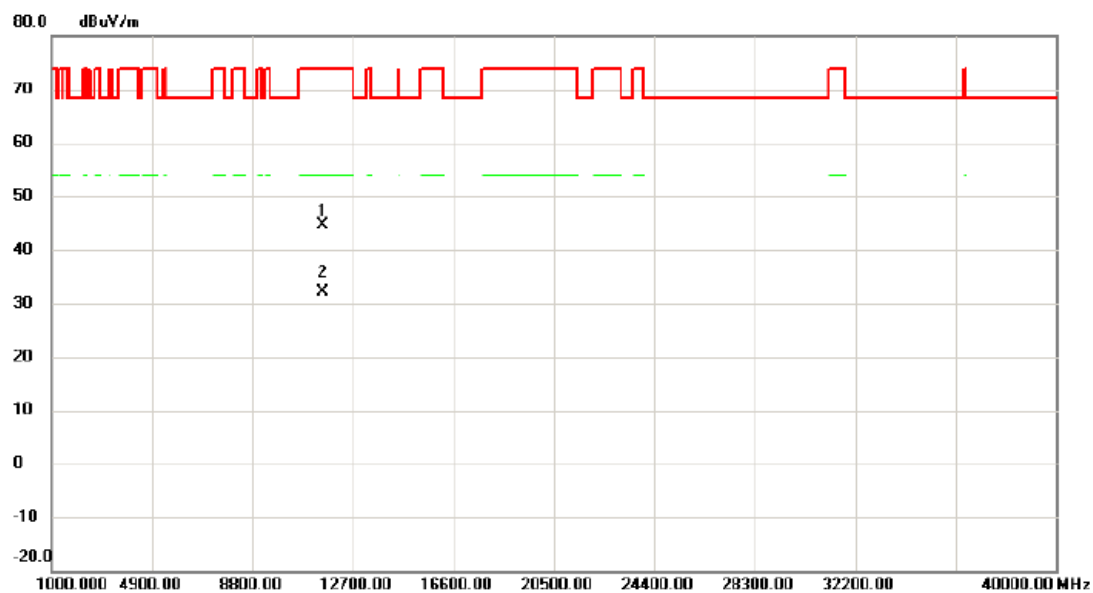

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11550.130	27.92	16.61	44.53	74.00	-29.47	peak	
2	*	11552.400	15.63	16.60	32.23	54.00	-21.77	AVG	

測試頻道: IEEE 802.11ax (HE20) /
5180 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢測器: Peak/AV


測試日期: 108/06/21

環境溫度: 24 °C

環境濕度: 52%

Orthogonal Axis: X

Polarization: Vertical

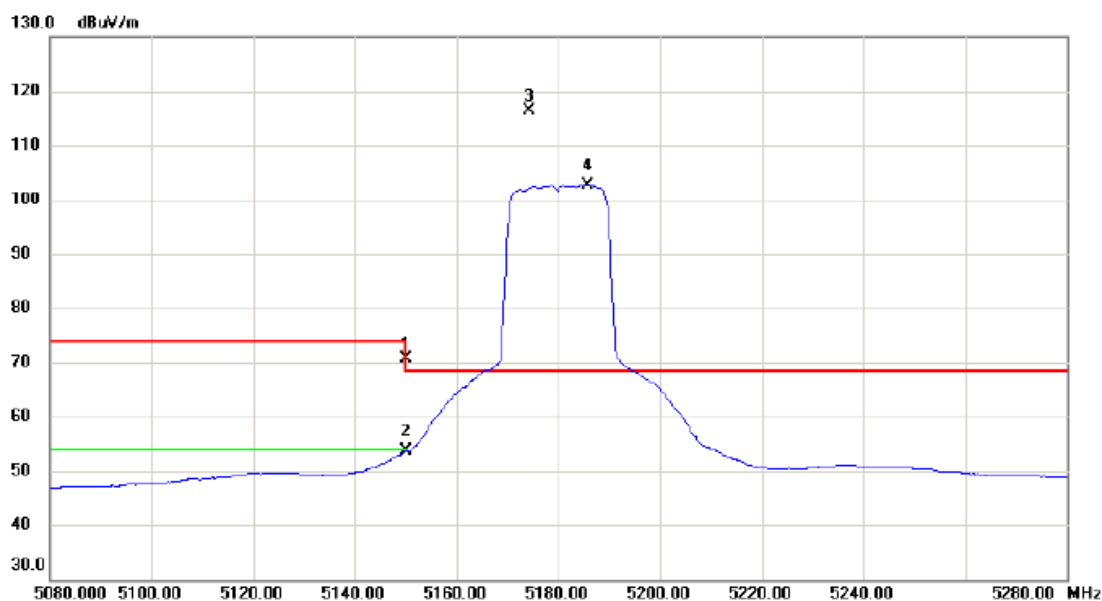

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5150.000	56.16	14.36	70.52	74.00	-3.48	peak	
2		5150.000	39.17	14.36	53.53	54.00	-0.47	AVG	
3	*	5174.300	101.92	14.40	116.32	68.30	48.02	peak	主波訊號不予判定
4	X	5185.600	88.29	14.42	102.71	68.30	34.41	AVG	主波訊號不予判定

測試頻道: IEEE 802.11ax (HE20) /
5180 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢測器: Peak/AV


測試日期: 108/06/22

環境溫度: 24 °C

環境濕度: 52%

Orthogonal Axis: X

Polarization: Vertical

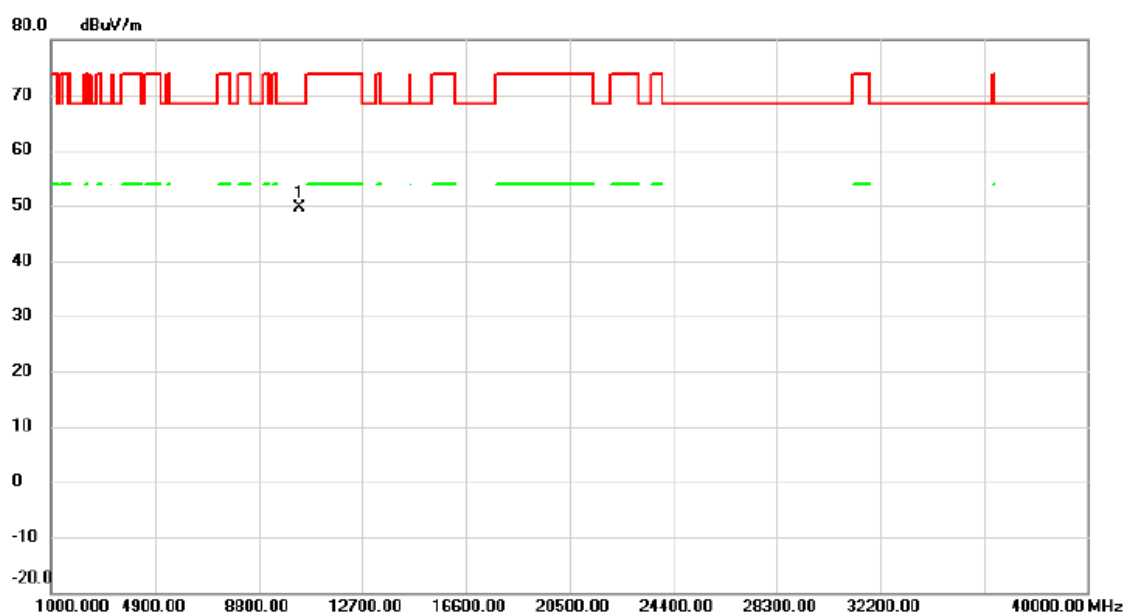


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10355.830	35.50	14.10	49.60	68.30	-18.70	peak	

測試頻道: IEEE 802.11ax (HE20) /
5180 MHz
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢測器: Peak/AV
環境溫度: 24 °C

測試模式: 發射
視頻頻寬: 1000 kHz / 10 Hz
測試距離: 3 米
測試日期: 108/06/21
環境濕度: 52%

Orthogonal Axis: X

Polarization: Horizontal

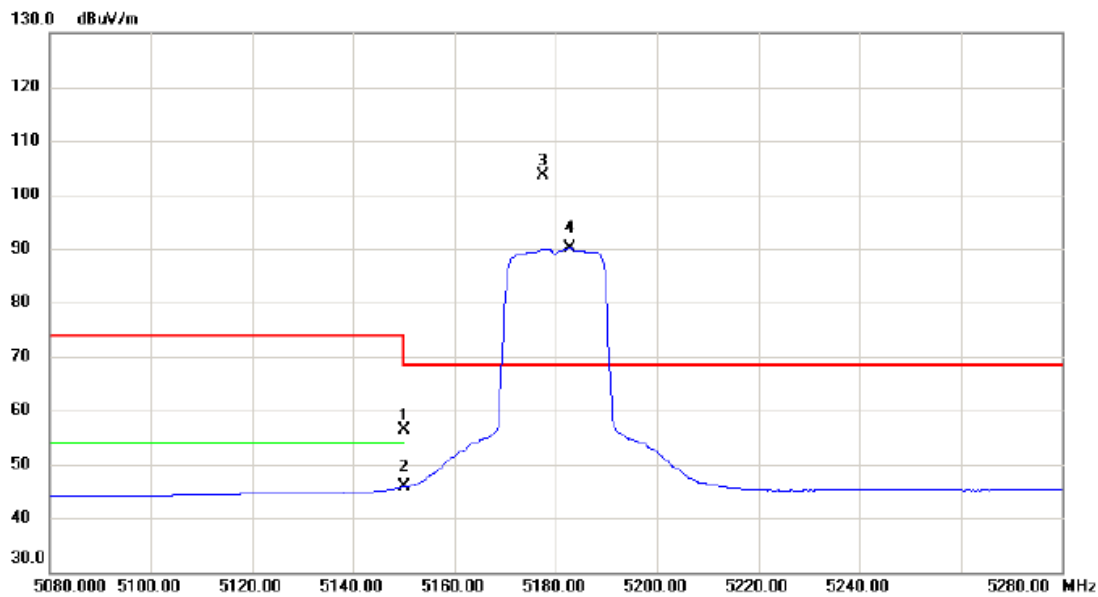

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5150.000	42.01	14.36	56.37	74.00	-17.63	peak	
2		5150.000	31.52	14.36	45.88	54.00	-8.12	AVG	
3	*	5177.400	89.34	14.41	103.75	68.30	35.45	peak	主波訊號不予判定
4	X	5182.700	75.61	14.42	90.03	68.30	21.73	AVG	主波訊號不予判定

測試頻道: IEEE 802.11ax (HE20) /
5180 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢測器: Peak/AV


測試日期: 108/06/22

環境溫度: 24 °C

環境濕度: 52%

Orthogonal Axis: X

Polarization: Horizontal

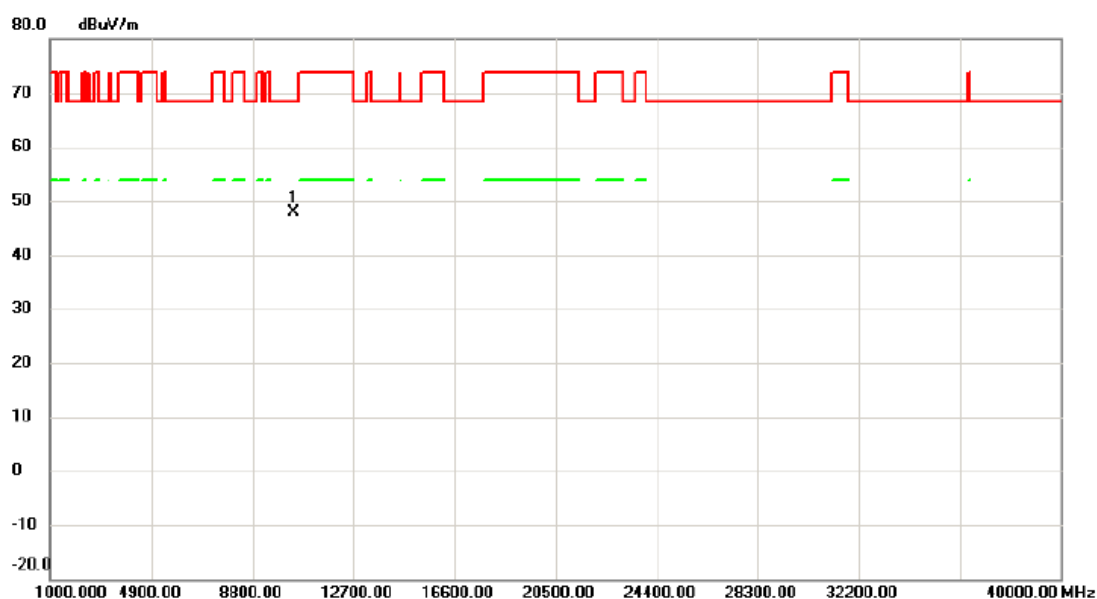

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	10360.310	33.82	14.13	47.95	68.30	-20.35	peak	

測試頻道: IEEE 802.11ax (HE20) /
5200 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢測器: Peak/AV

環境溫度: 24 °C

測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz


測試距離: 3 米

測試日期: 108/06/21

環境濕度: 52%

Orthogonal Axis: X

Polarization: Vertical

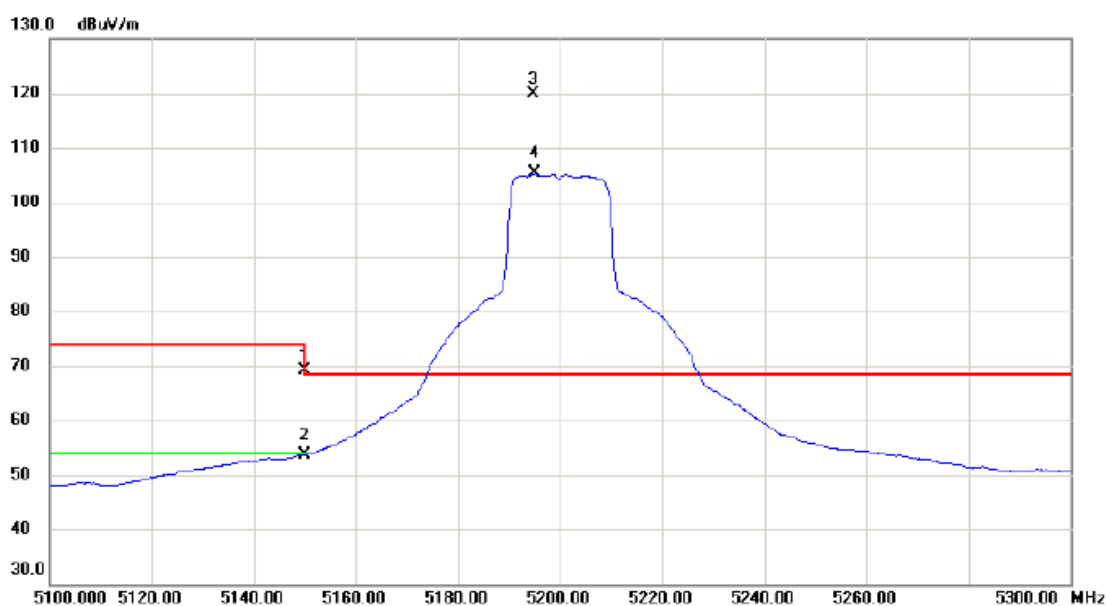

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5150.000	54.68	14.36	69.04	74.00	-4.96	peak	
2		5150.000	39.28	14.36	53.64	54.00	-0.36	AVG	
3	*	5194.800	105.42	14.44	119.86	68.30	51.56	peak	主波訊號不予判定
4	X	5195.100	90.84	14.44	105.28	68.30	36.98	AVG	主波訊號不予判定

測試頻道: IEEE 802.11ax (HE20) /
5200 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢測器: Peak/AV


測試日期: 108/06/22

環境溫度: 24 °C

環境濕度: 52%

Orthogonal Axis: X

Polarization: Vertical

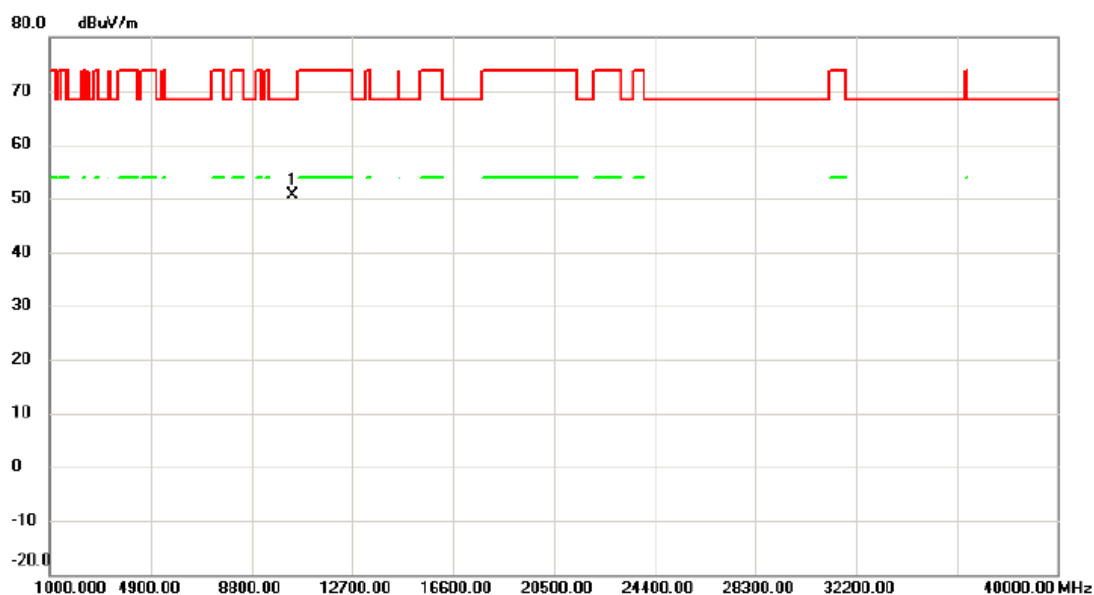


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	10402.900	36.35	14.27	50.62	68.30	-17.68	peak	

測試頻道: IEEE 802.11ax (HE20) /
5200 MHz
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢測器: Peak/AV
環境溫度: 24 °C

測試模式: 發射
視頻頻寬: 1000 kHz / 10 Hz
測試距離: 3 米
測試日期: 108/06/21
環境濕度: 52%

Orthogonal Axis: X

Polarization: Horizontal

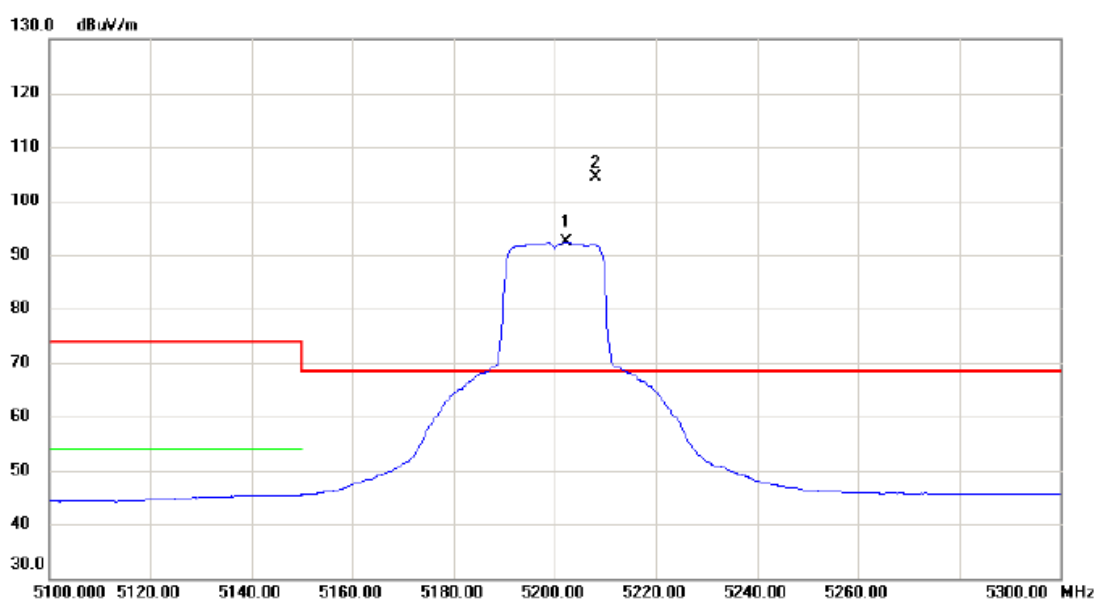


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	5202.200	77.91	14.45	92.36	68.30	24.06	AVG	主波訊號不予判定
2	*	5208.100	89.86	14.46	104.32	68.30	36.02	peak	主波訊號不予判定

測試頻道: IEEE 802.11ax (HE20) /
5200 MHz
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢測器: Peak/AV
環境溫度: 24 °C

測試模式: 發射
視頻頻寬: 1000 kHz / 10 Hz
測試距離: 3 米
測試日期: 108/06/22
環境濕度: 52%

Orthogonal Axis: X

Polarization: Horizontal

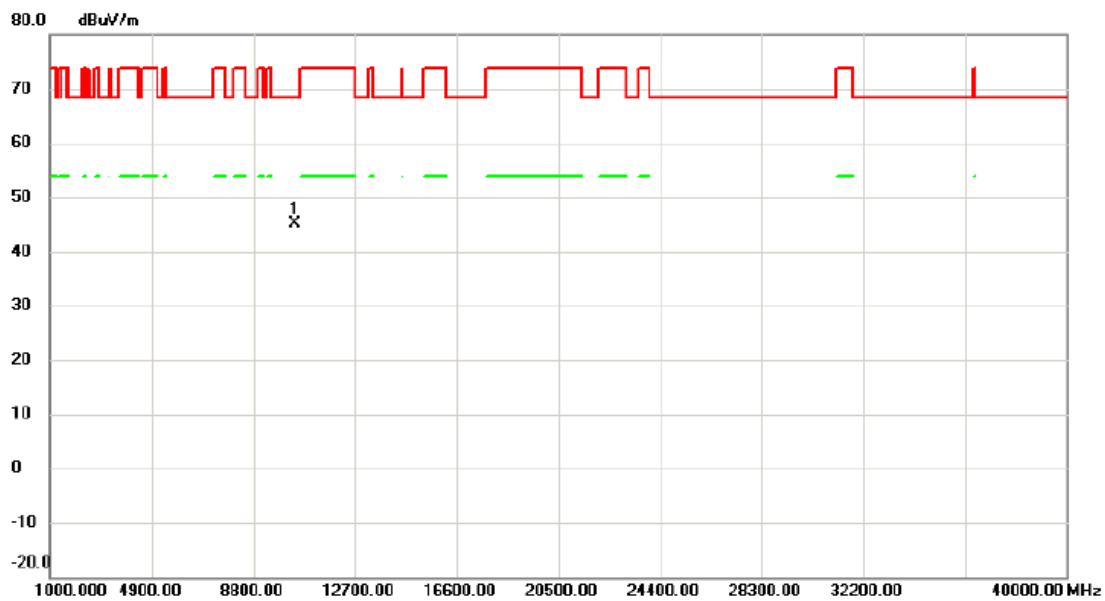

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	10398.600	30.85	14.25	45.10	68.30	-23.20	peak	

測試頻道: IEEE 802.11ax (HE20) /
5240 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢測器: Peak/AV


測試日期: 108/06/21

環境溫度: 24 °C

環境濕度: 52%

Orthogonal Axis: X

Polarization: Vertical

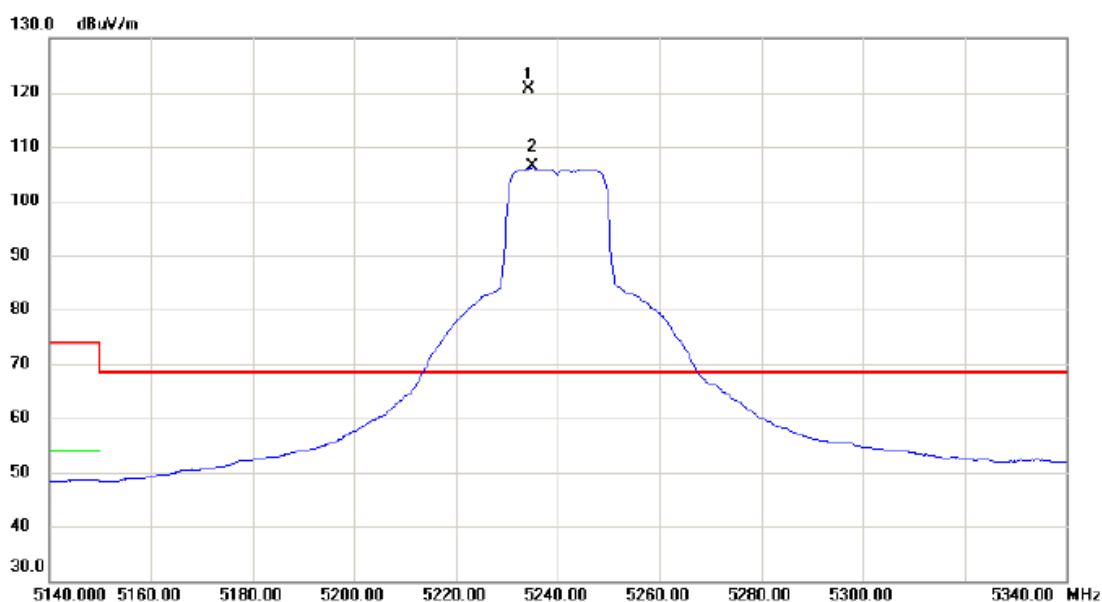

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	5234.300	106.22	14.51	120.73	68.30	52.43	peak	主波訊號不予判定
2	X	5235.200	91.79	14.51	106.30	68.30	38.00	AVG	主波訊號不予判定

測試頻道: IEEE 802.11ax (HE20) /
5240 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢測器: Peak/AV


測試日期: 108/06/22

環境溫度: 24 °C

環境濕度: 52%

Orthogonal Axis: X

Polarization: Vertical

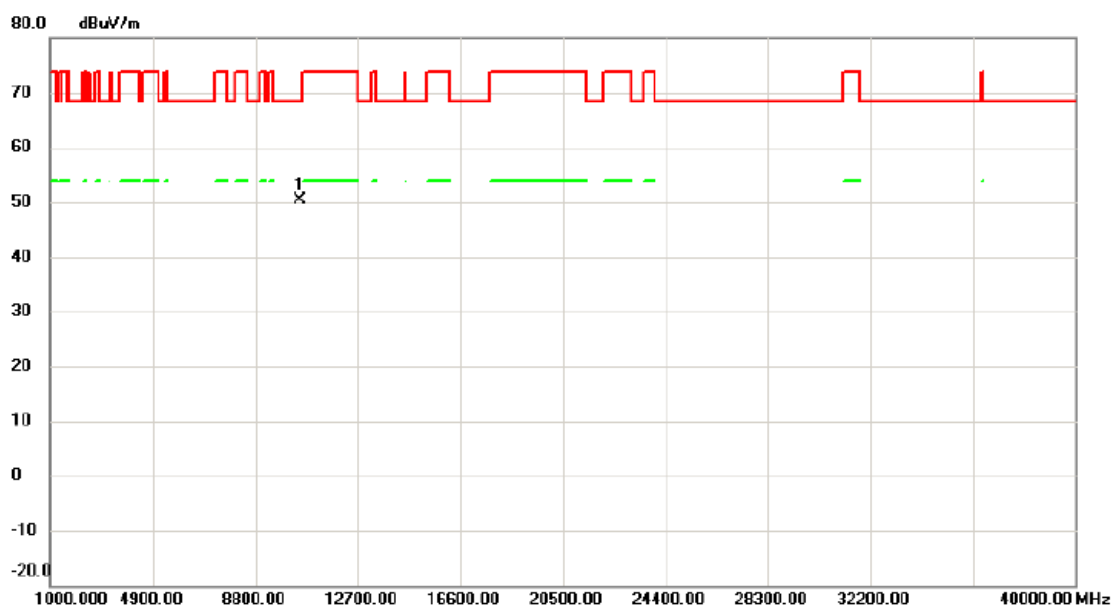

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10479.640	35.78	14.52	50.30	68.30	-18.00	peak	

測試頻道: IEEE 802.11ax (HE20) /
5240 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢測器: Peak/AV

環境溫度: 24 °C

測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz


測試距離: 3 米

測試日期: 108/06/21

環境濕度: 52%

Orthogonal Axis: X

Polarization: Horizontal

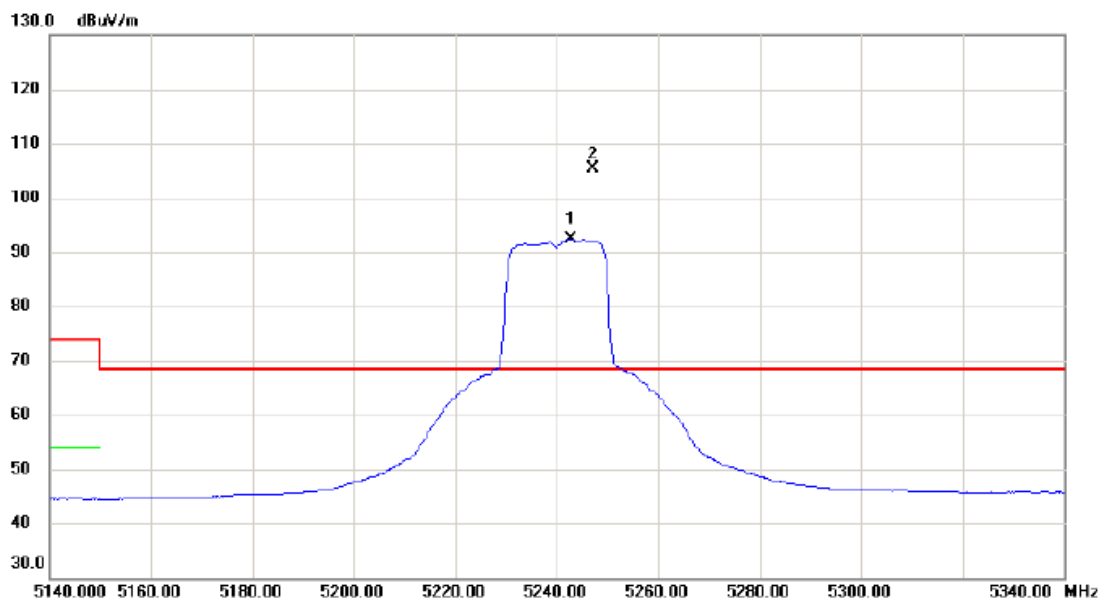

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	5242.700	77.87	14.52	92.39	68.30	24.09	AVG	主波訊號不予判定
2	*	5247.100	90.78	14.53	105.31	68.30	37.01	peak	主波訊號不予判定

測試頻道: IEEE 802.11ax (HE20) /
5240 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢測器: Peak/AV


測試日期: 108/06/22

環境溫度: 24 °C

環境濕度: 52%

Orthogonal Axis: X

Polarization: Horizontal

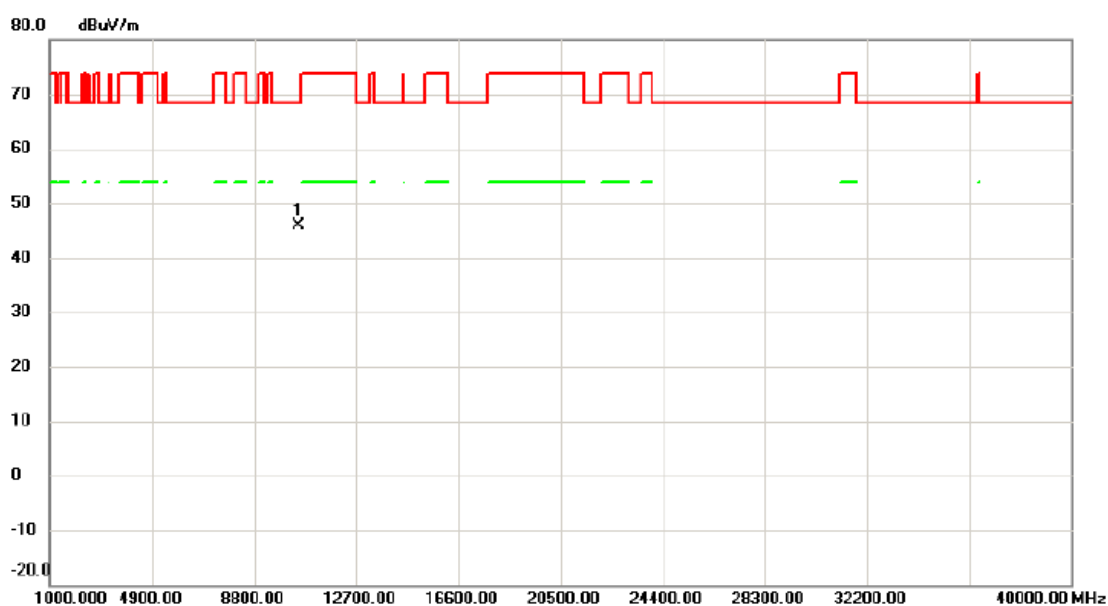

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	10483.250	31.35	14.53	45.88	68.30	-22.42	peak	

測試頻道: IEEE 802.11ax (HE40) /
5190 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢測器: Peak/AV


測試日期: 108/06/21

環境溫度: 24 °C

環境濕度: 52%

Orthogonal Axis: X

Polarization: Vertical

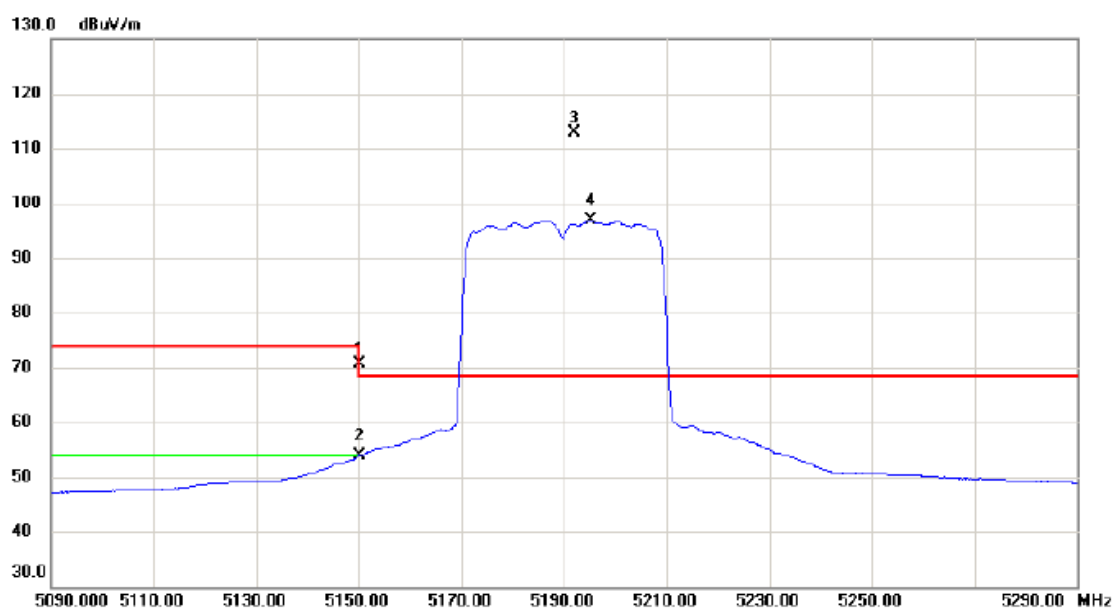

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5150.000	56.33	14.36	70.69	74.00	-3.31	peak	
2		5150.000	39.52	14.36	53.88	54.00	-0.12	AVG	
3	*	5192.100	98.51	14.43	112.94	68.30	44.64	peak	主波訊號不予判定
4	X	5195.200	82.49	14.44	96.93	68.30	28.63	AVG	主波訊號不予判定

測試頻道: IEEE 802.11ax (HE40) /
5190 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢測器: Peak/AV


測試日期: 108/06/22

環境溫度: 24 °C

環境濕度: 52%

Orthogonal Axis: X

Polarization: Vertical

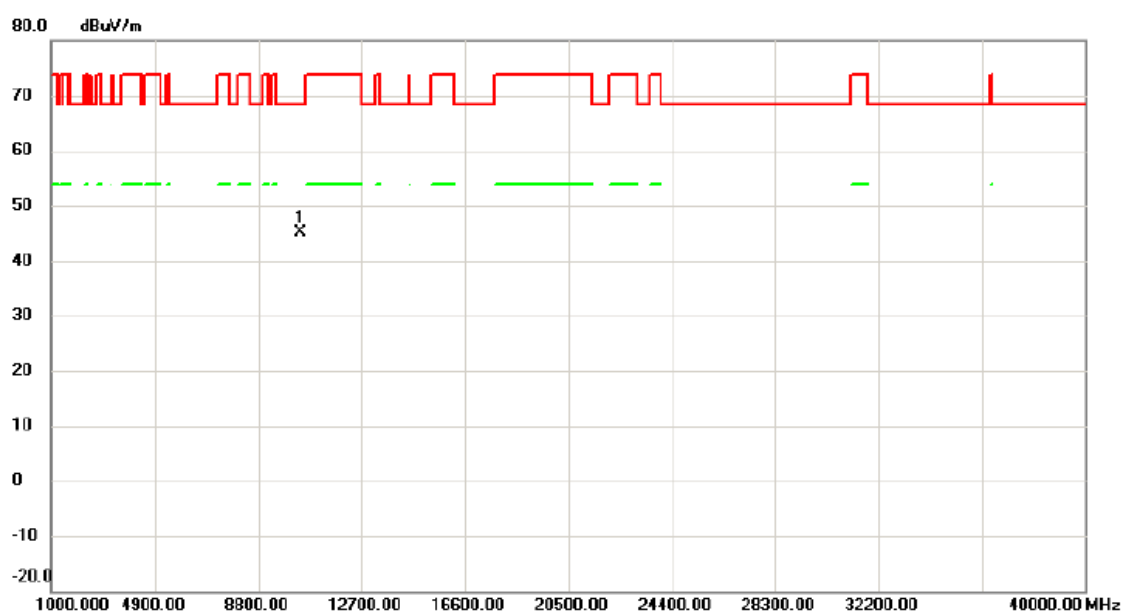


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10384.000	30.98	14.20	45.18	68.30	-23.12	peak	

測試頻道: IEEE 802.11ax (HE40) /
5190 MHz
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢測器: Peak/AVG
環境溫度: 24 °C

測試模式: 發射
視頻頻寬: 1000 kHz / 10 Hz
測試距離: 3 米
測試日期: 108/06/21
環境濕度: 52%

Orthogonal Axis: X

Polarization: Horizontal

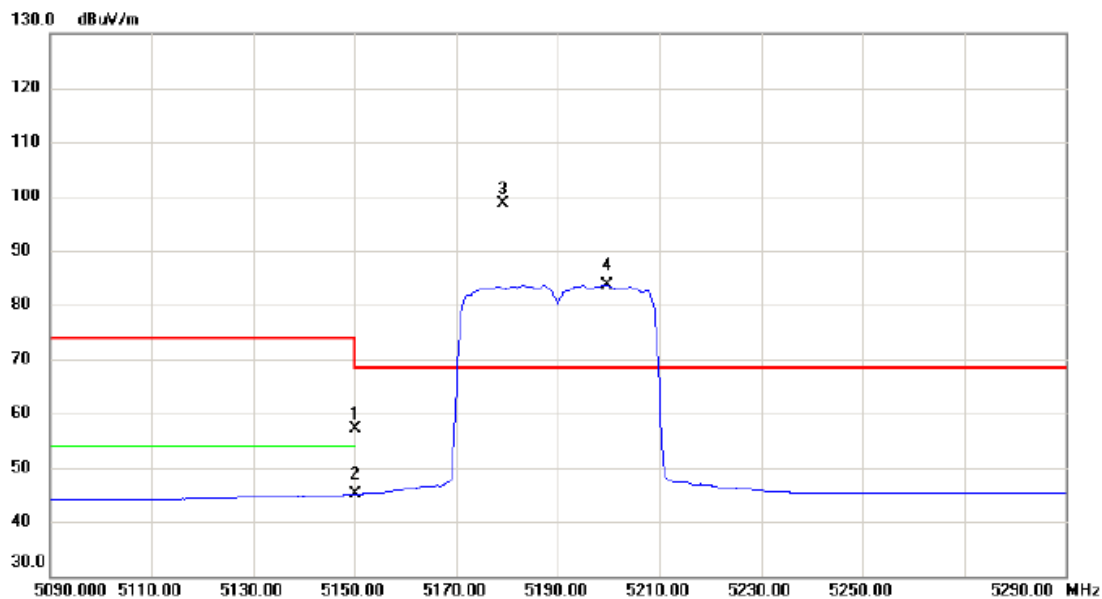

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5150.000	42.88	14.36	57.24	74.00	-16.76	peak	
2		5150.000	30.81	14.36	45.17	54.00	-8.83	AVG	
3	*	5179.200	84.11	14.41	98.52	68.30	30.22	peak	主波訊號不予判定
4	X	5199.600	69.20	14.45	83.65	68.30	15.35	AVG	主波訊號不予判定

測試頻道: IEEE 802.11ax (HE40) /
5190 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢測器: Peak/AV


測試日期: 108/06/22

環境溫度: 24 °C

環境濕度: 52%

Orthogonal Axis: X

Polarization: Horizontal

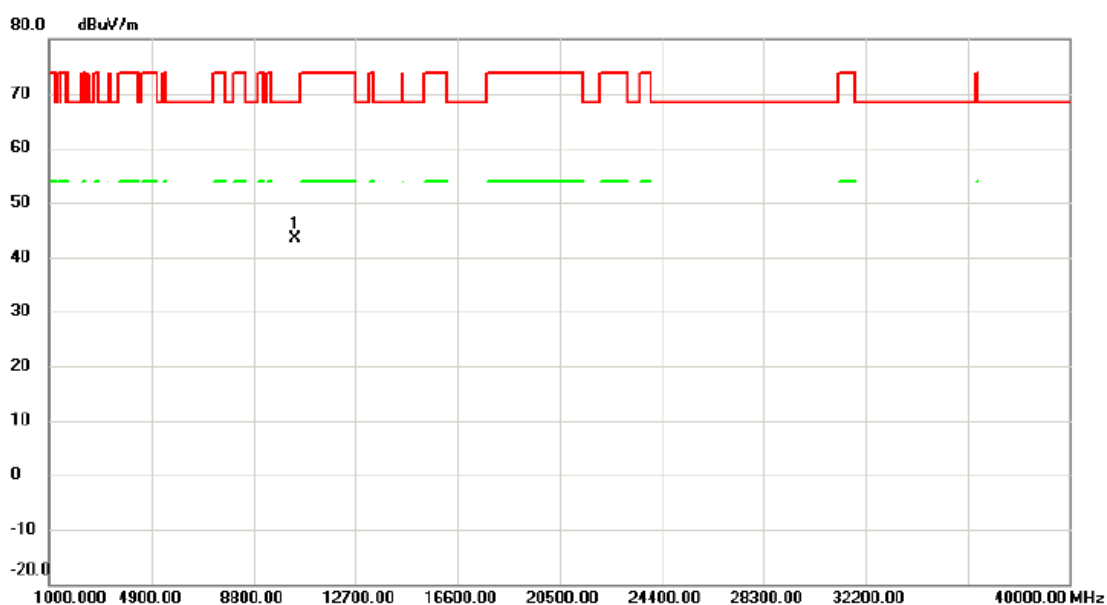

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10385.030	29.14	14.20	43.34	68.30	-24.96	peak	

測試頻道: IEEE 802.11ax (HE40) /
5230 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢測器: Peak/AV


測試日期: 108/06/21

環境溫度: 24 °C

環境濕度: 52%

Orthogonal Axis: X

Polarization: Vertical

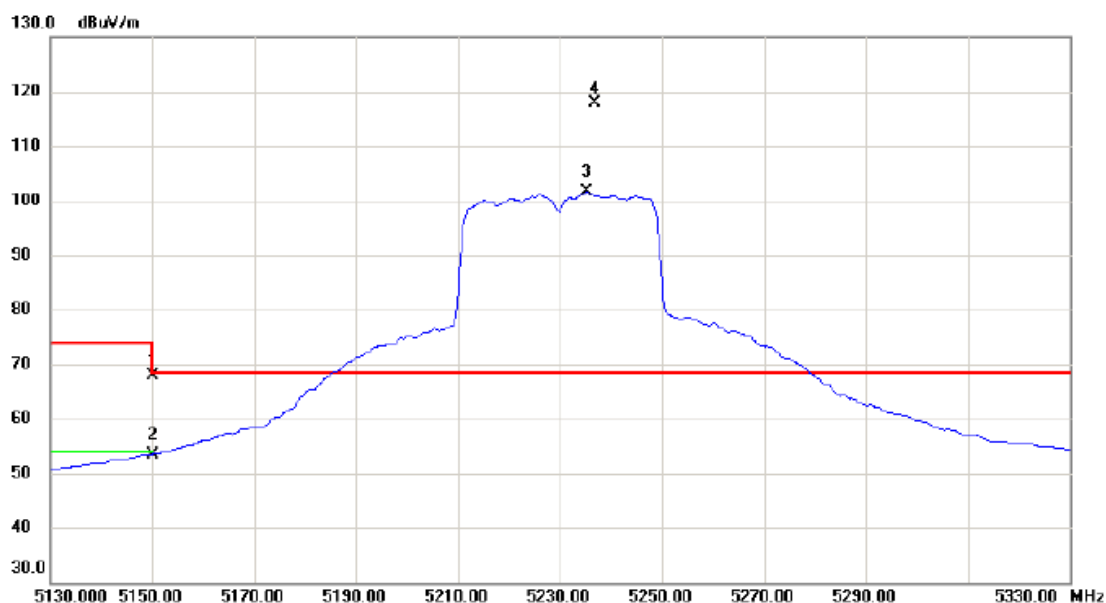

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5150.000	53.42	14.36	67.78	74.00	-6.22	peak	
2		5150.000	39.07	14.36	53.43	54.00	-0.57	AVG	
3	X	5235.300	87.03	14.51	101.54	68.30	33.24	AVG	主波訊號不予判定
4	*	5236.800	103.42	14.51	117.93	68.30	49.63	peak	主波訊號不予判定

測試頻道: IEEE 802.11ax (HE40) /
5230 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢測器: Peak/AV


測試日期: 108/06/22

環境溫度: 24 °C

環境濕度: 52%

Orthogonal Axis: X

Polarization: Vertical

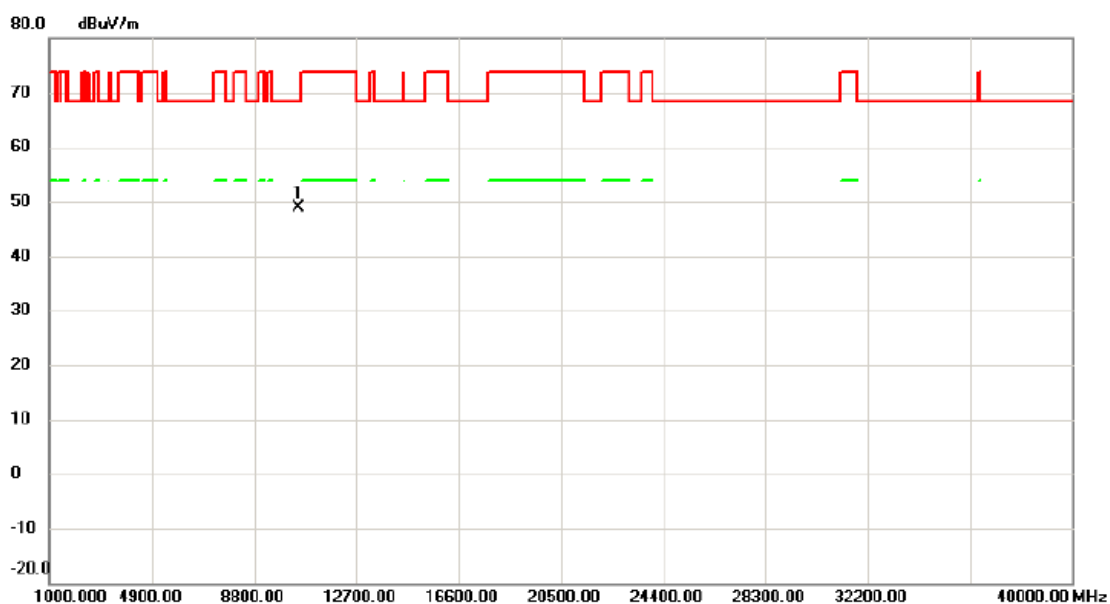

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	10467.820	34.39	14.48	48.87	68.30	-19.43	peak	

測試頻道: IEEE 802.11ax (HE40) /
5230 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢測器: Peak/AV

環境溫度: 24 °C

測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz


測試距離: 3 米

測試日期: 108/06/21

環境濕度: 52%

Orthogonal Axis: X

Polarization: Horizontal

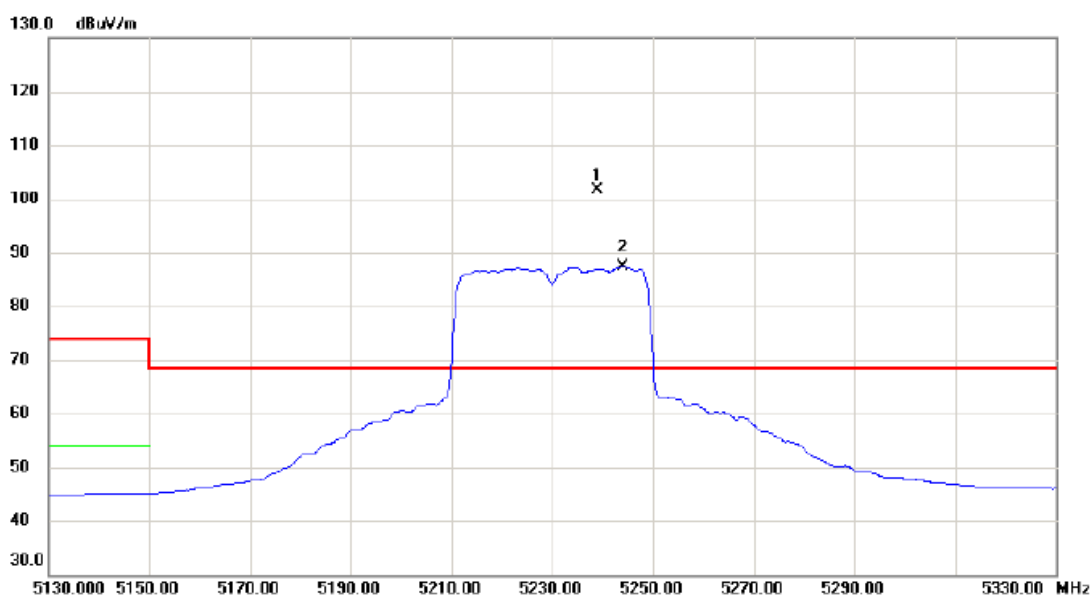


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	5238.900	87.05	14.51	101.56	68.30	33.26	peak	主波訊號不予判定
2	X	5244.000	72.86	14.53	87.39	68.30	19.09	AVG	主波訊號不予判定

測試頻道: IEEE 802.11ax (HE40) /
5230 MHz
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢測器: Peak/AV
環境溫度: 24 °C

測試模式: 發射
視頻頻寬: 1000 kHz / 10 Hz
測試距離: 3 米
測試日期: 108/06/22
環境濕度: 52%

Orthogonal Axis: X

Polarization: Horizontal

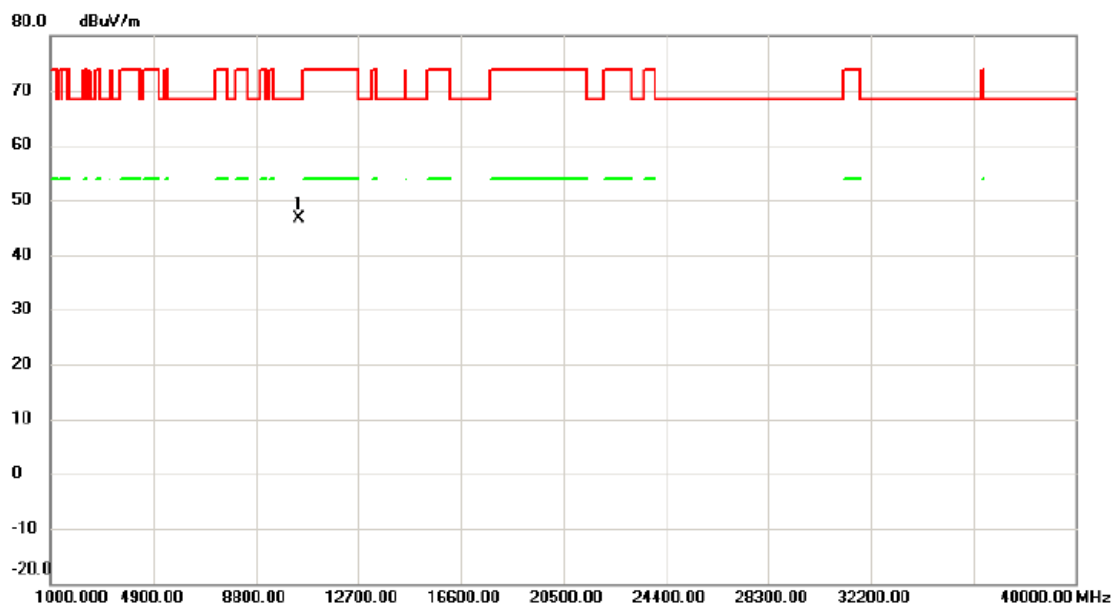

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	10458.460	32.26	14.46	46.72	68.30	-21.58	peak	

測試頻道: IEEE 802.11ax (HE80) /
5210 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢測器: Peak/AV

環境溫度: 24 °C

測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz


測試距離: 3 米

測試日期: 108/06/21

環境濕度: 52%

Orthogonal Axis: X

Polarization: Vertical

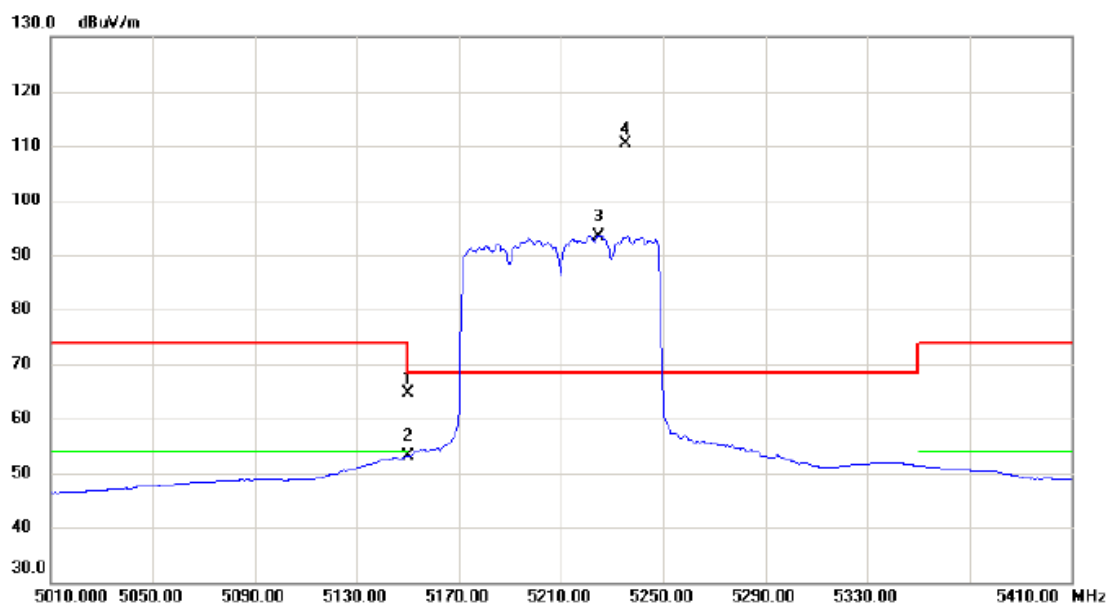

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5150.000	50.20	14.36	64.56	74.00	-9.44	peak	
2		5150.000	38.73	14.36	53.09	54.00	-0.91	AVG	
3	X	5224.600	78.93	14.49	93.42	68.30	25.12	AVG	主波訊號不予判定
4	*	5235.400	95.78	14.51	110.29	68.30	41.99	peak	主波訊號不予判定

測試頻道: IEEE 802.11ax (HE800) /
5210 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢測器: Peak/AV


測試日期: 108/06/22

環境溫度: 24 °C

環境濕度: 52%

Orthogonal Axis: X

Polarization: Vertical

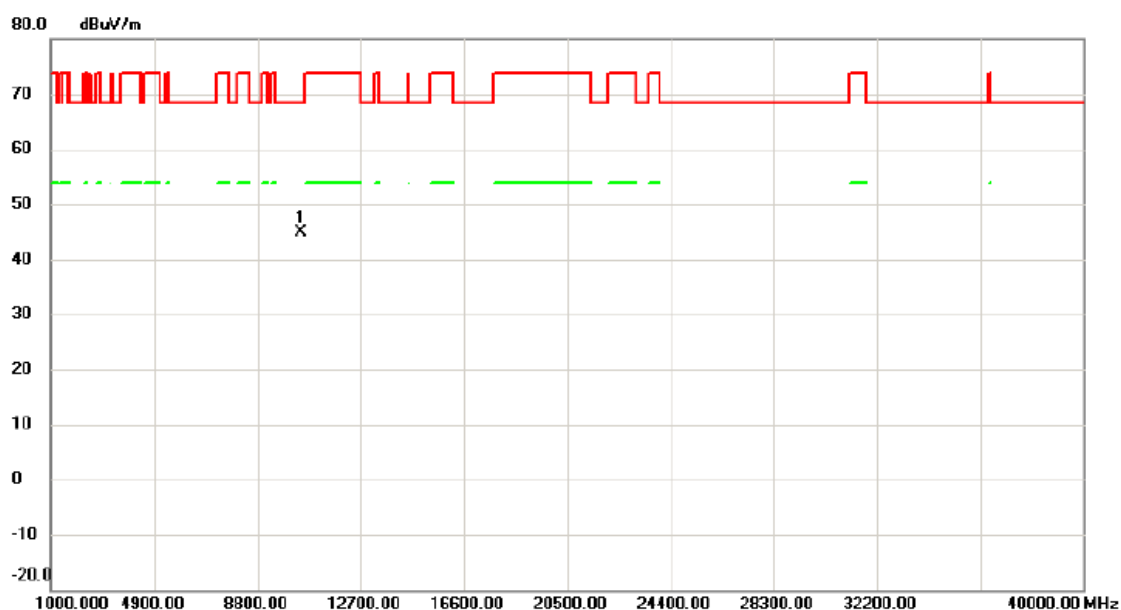

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10422.080	30.55	14.33	44.88	68.30	-23.42	peak	

測試頻道: IEEE 802.11ax (HE80) /
5210 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢測器: Peak/AV


測試日期: 108/06/21

環境溫度: 24 °C

環境濕度: 52%

Orthogonal Axis: X

Polarization: Horizontal

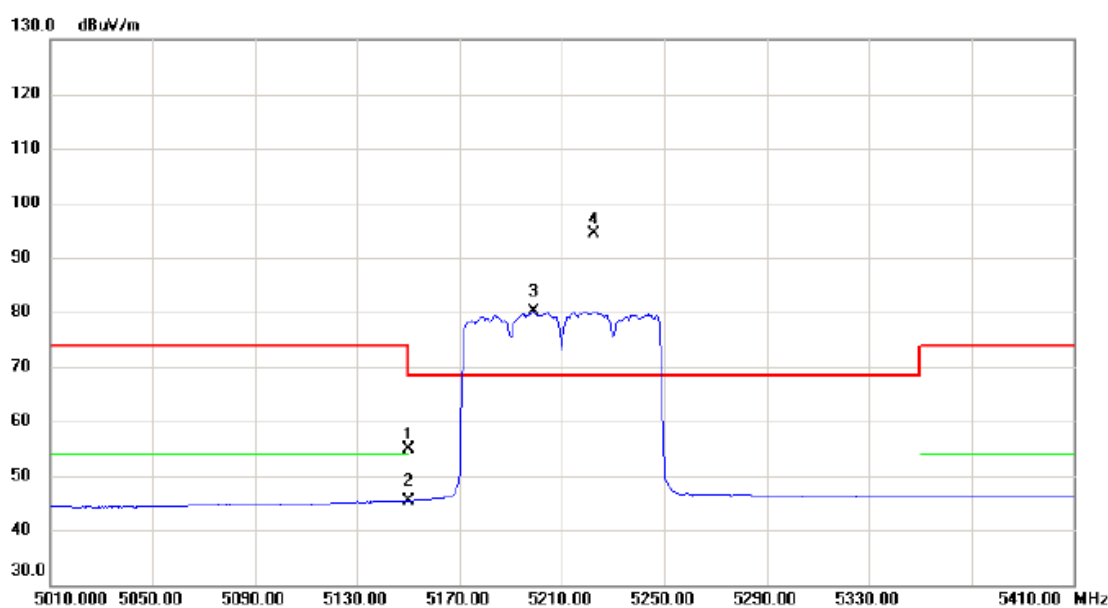

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5150.000	40.48	14.36	54.84	74.00	-19.16	peak	
2		5150.000	31.06	14.36	45.42	54.00	-8.58	AVG	
3	X	5199.000	65.65	14.45	80.10	68.30	11.80	AVG	主波訊號不予判定
4	*	5222.600	79.82	14.48	94.30	68.30	26.00	peak	主波訊號不予判定

測試頻道: IEEE 802.11ax (HE80) /
5210 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢測器: Peak/AV


測試日期: 108/06/22

環境溫度: 24 °C

環境濕度: 52%

Orthogonal Axis: X

Polarization: Horizontal

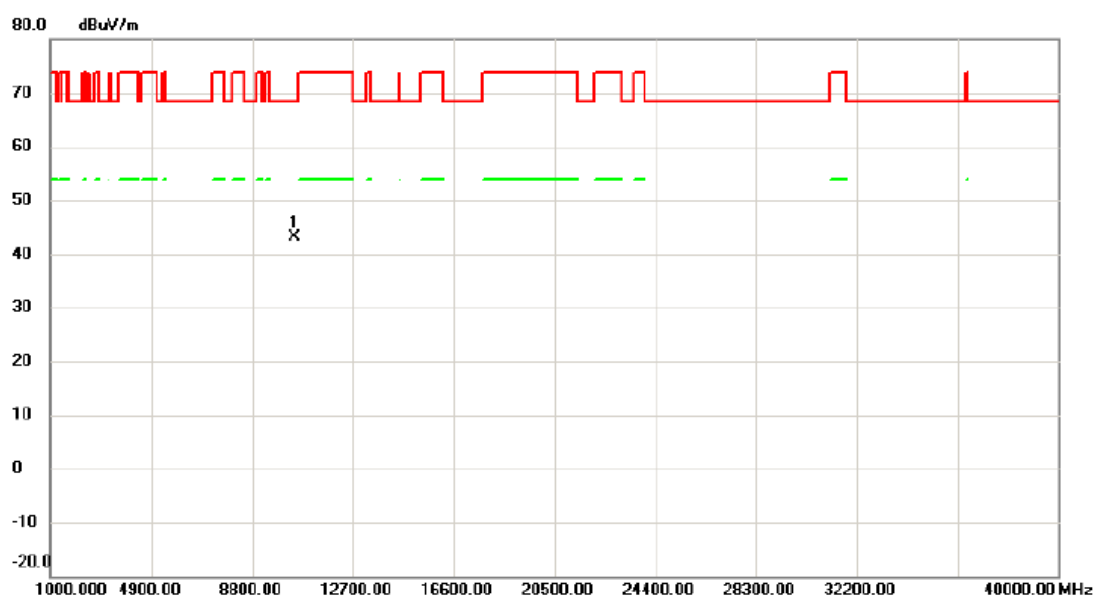

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10428.720	28.81	14.35	43.16	68.30	-25.14	peak	

測試頻道: IEEE 802.11ax (HE20) /
5745 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢測器: Peak/AV


測試日期: 108/06/21

環境溫度: 24 °C

環境濕度: 52%

Orthogonal Axis: X

Polarization: Vertical

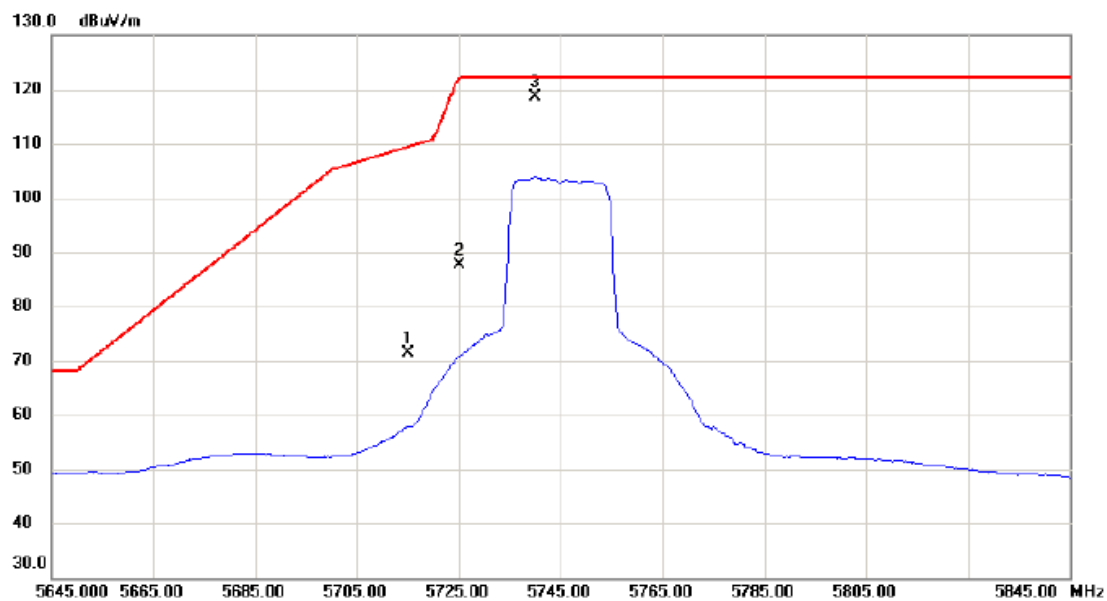

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5715.000	56.08	15.26	71.34	109.40	-38.06	peak	
2		5725.000	72.33	15.27	87.60	122.20	-34.60	peak	
3	*	5740.200	103.38	15.29	118.67	122.20	-3.53	peak	主波訊號不予判定

測試頻道: IEEE 802.11ax (HE20) /
5745 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢測器: Peak/AV


測試日期: 108/06/22

環境溫度: 24 °C

環境濕度: 52%

Orthogonal Axis: X

Polarization: Vertical

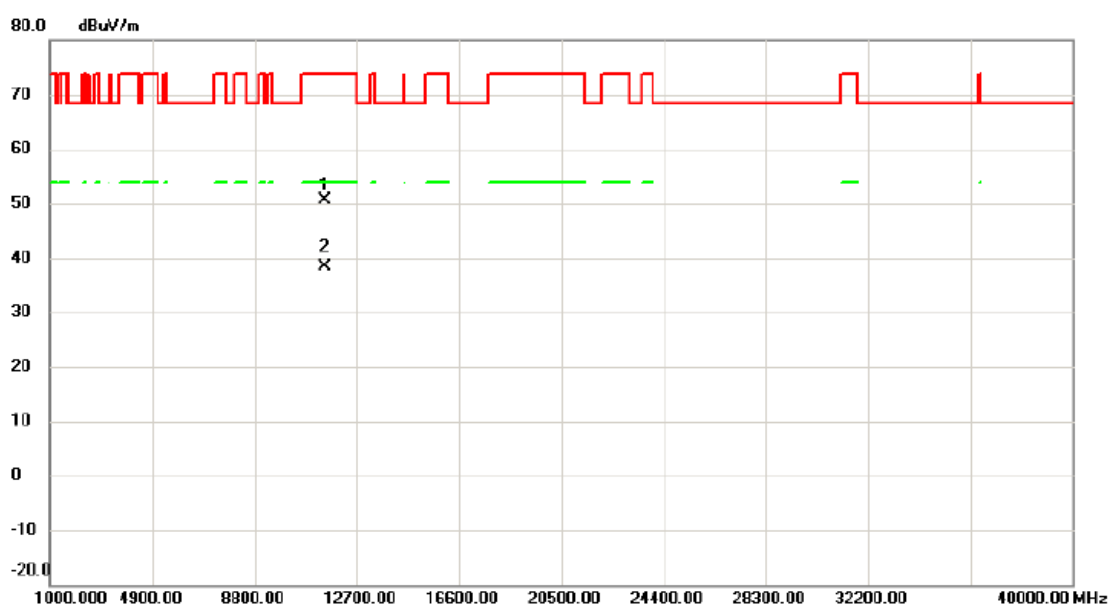

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11489.940	33.86	16.73	50.59	74.00	-23.41	peak	
2	*	11490.160	21.75	16.73	38.48	54.00	-15.52	AVG	

測試頻道: IEEE 802.11ax (HE20) /
5745 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢測器: Peak/AV


測試日期: 108/06/21

環境溫度: 24 °C

環境濕度: 52%

Orthogonal Axis: X

Polarization: Horizontal

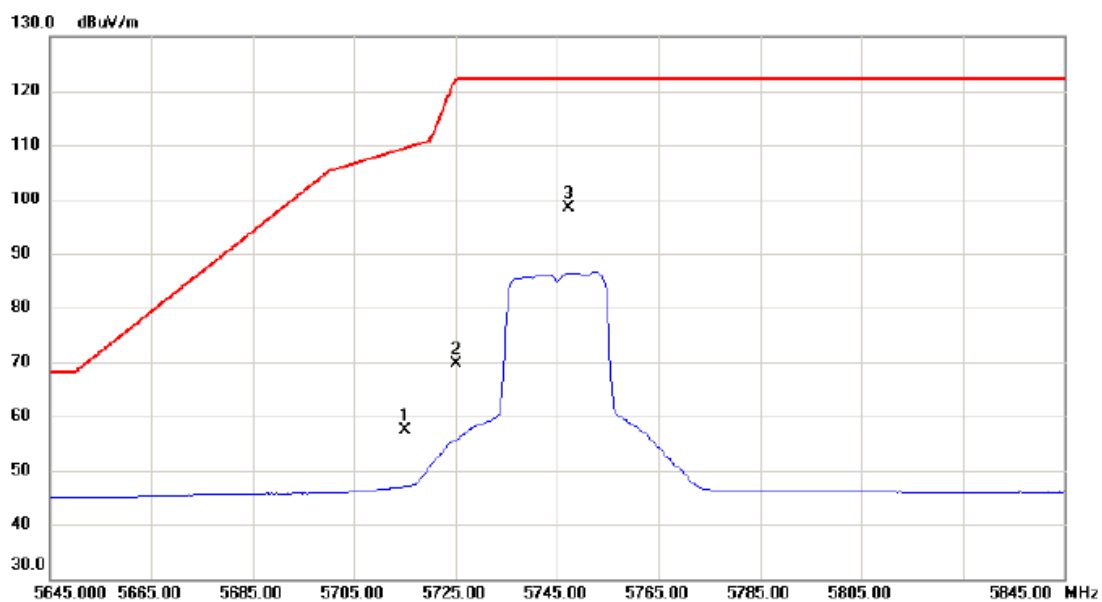

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5715.000	42.16	15.26	57.42	109.40	-51.98	peak	
2		5725.000	54.30	15.27	69.57	122.20	-52.63	peak	
3	*	5747.400	83.06	15.30	98.36	122.20	-23.84	peak	主波訊號不予判定

測試頻道: IEEE 802.11ax (HE20) /
5745 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢測器: Peak/AV


測試日期: 108/06/22

環境溫度: 24 °C

環境濕度: 52%

Orthogonal Axis: X

Polarization: Horizontal

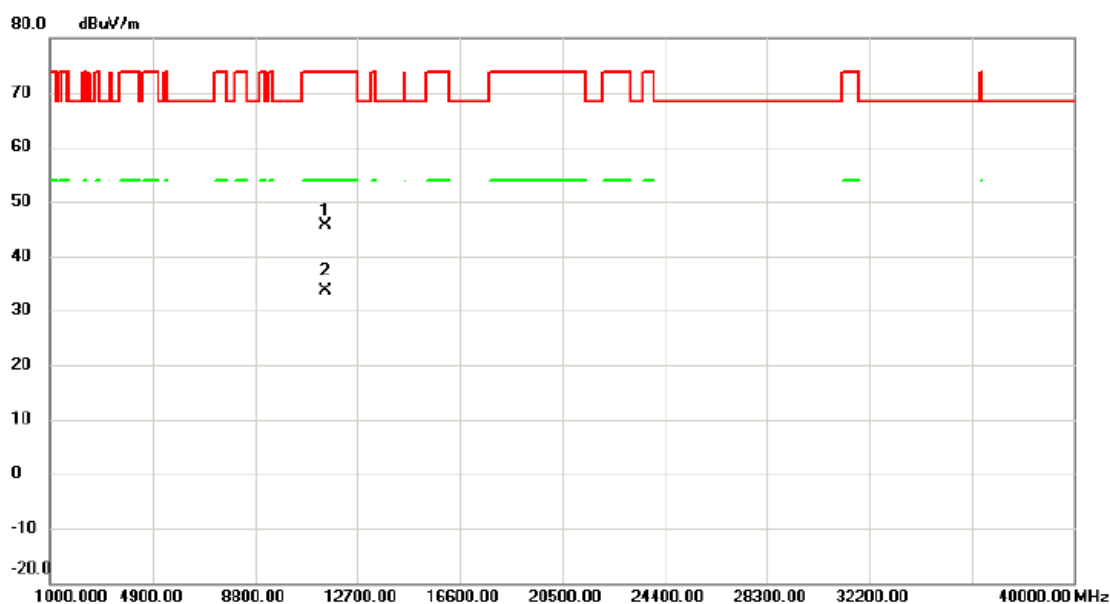


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11487.730	28.81	16.73	45.54	74.00	-28.46	peak	
2	*	11490.210	16.82	16.73	33.55	54.00	-20.45	AVG	

測試頻道: IEEE 802.11ax (HE20) /
5785 MHz
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢測器: Peak/AV
環境溫度: 24 °C

測試模式: 發射
視頻頻寬: 1000 kHz / 10 Hz
測試距離: 3 米
測試日期: 108/06/21
環境濕度: 52%

Orthogonal Axis: X

Polarization: Vertical

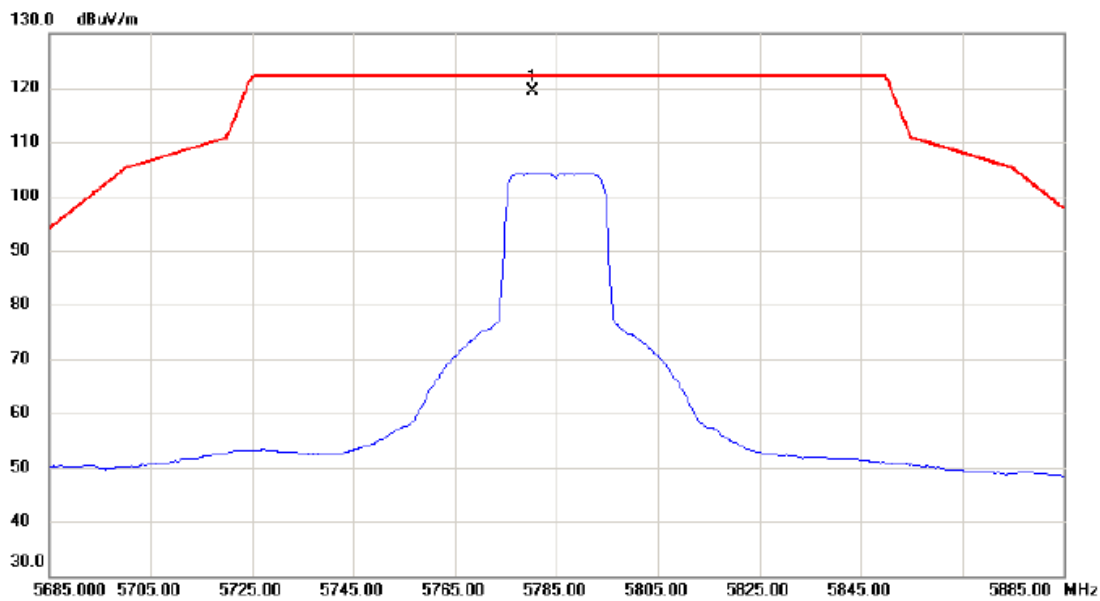

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	5780.300	104.00	15.34	119.34	122.20	-2.86	peak	主波訊號不予判定

測試頻道: IEEE 802.11ax (HE20) /
5785 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢測器: Peak/AV


測試日期: 108/06/22

環境溫度: 24 °C

環境濕度: 52%

Orthogonal Axis: X

Polarization: Vertical

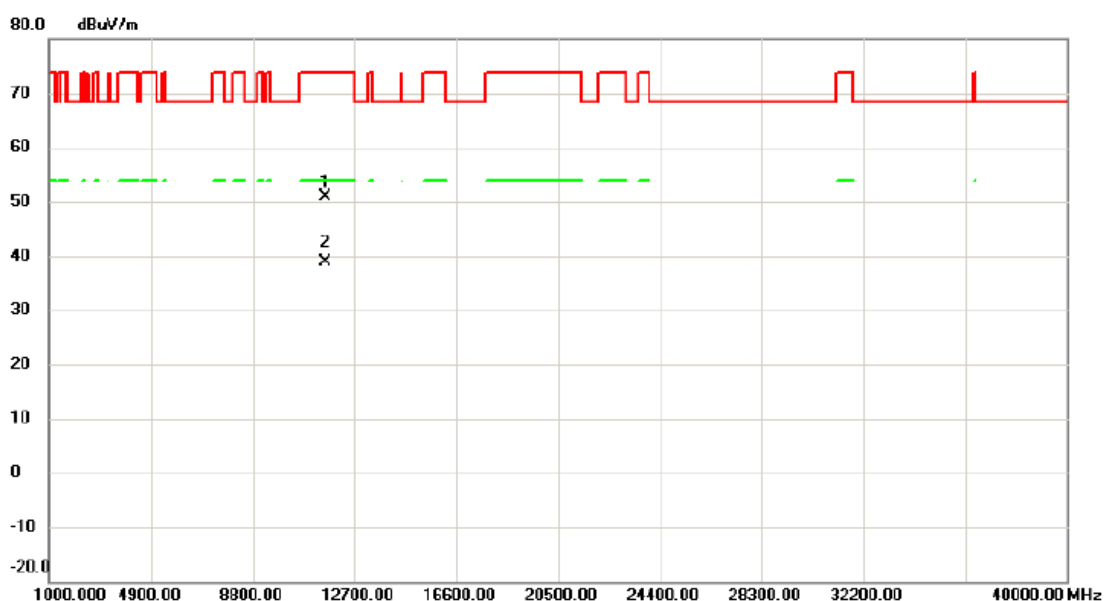

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11562.490	34.25	16.58	50.83	74.00	-23.17	peak	
2	*	11570.540	22.44	16.55	38.99	54.00	-15.01	AVG	

測試頻道: IEEE 802.11ax (HE20) /
5785 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢測器: Peak/AV


測試日期: 108/06/21

環境溫度: 24 °C

環境濕度: 52%

Orthogonal Axis: X

Polarization: Horizontal

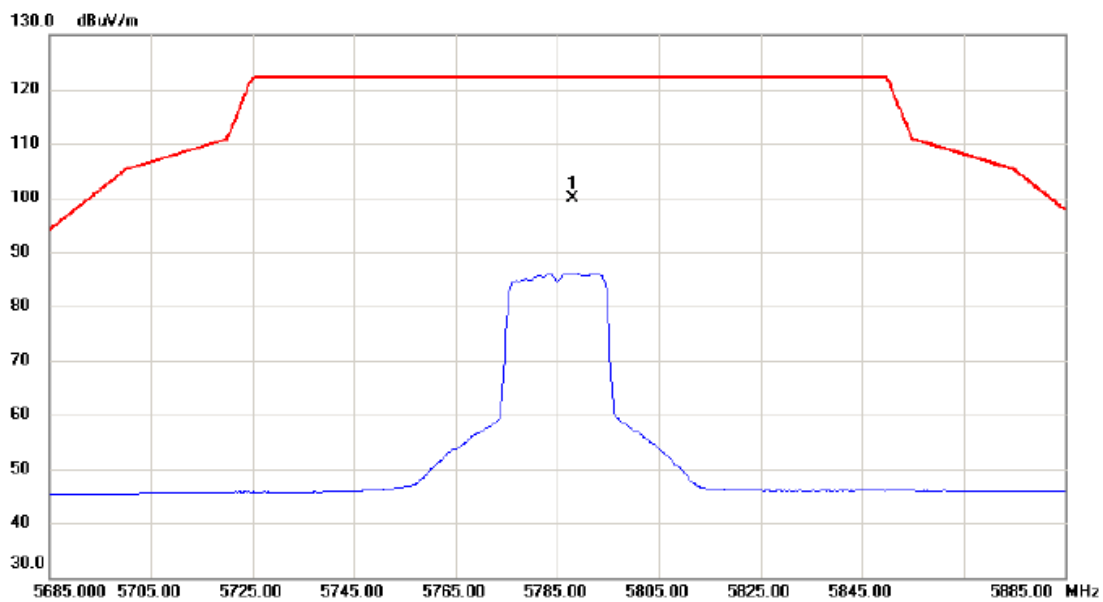

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	5788.000	84.50	15.35	99.85	122.20	-22.35	peak	主波訊號不予判定

測試頻道: IEEE 802.11ax (HE20) /
5785 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢測器: Peak/AV


測試日期: 108/06/22

環境溫度: 24 °C

環境濕度: 52%

Orthogonal Axis: X

Polarization: Horizontal

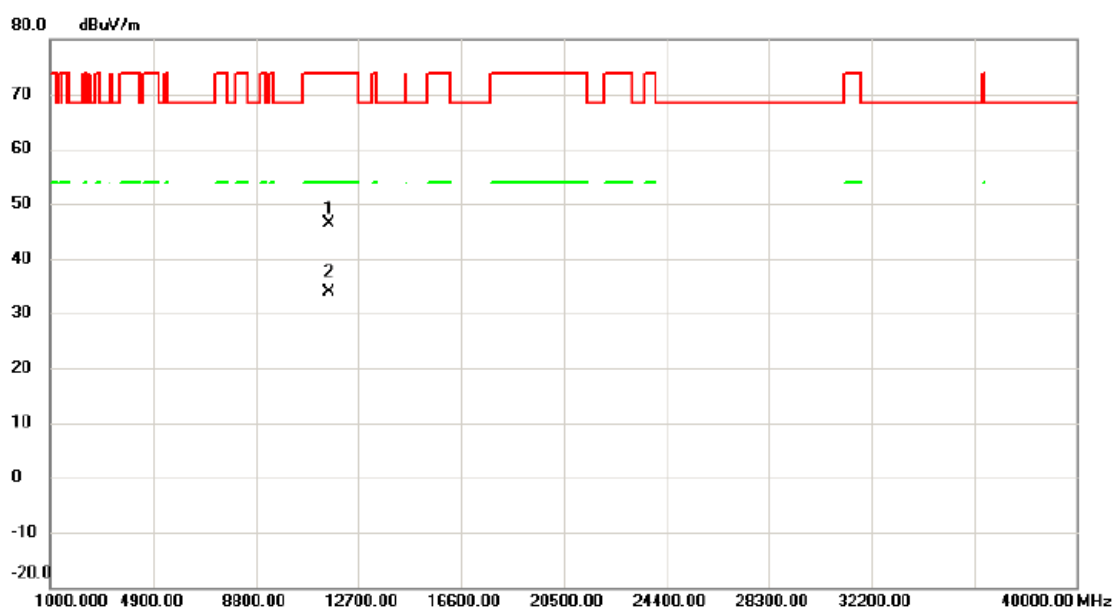

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11565.440	29.92	16.56	46.48	74.00	-27.52	peak	
2	*	11570.330	17.34	16.55	33.89	54.00	-20.11	AVG	

測試頻道: IEEE 802.11ax (HE20) /
5825 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢測器: Peak/AV


測試日期: 108/06/21

環境溫度: 24 °C

環境濕度: 52%

Orthogonal Axis: X

Polarization: Vertical

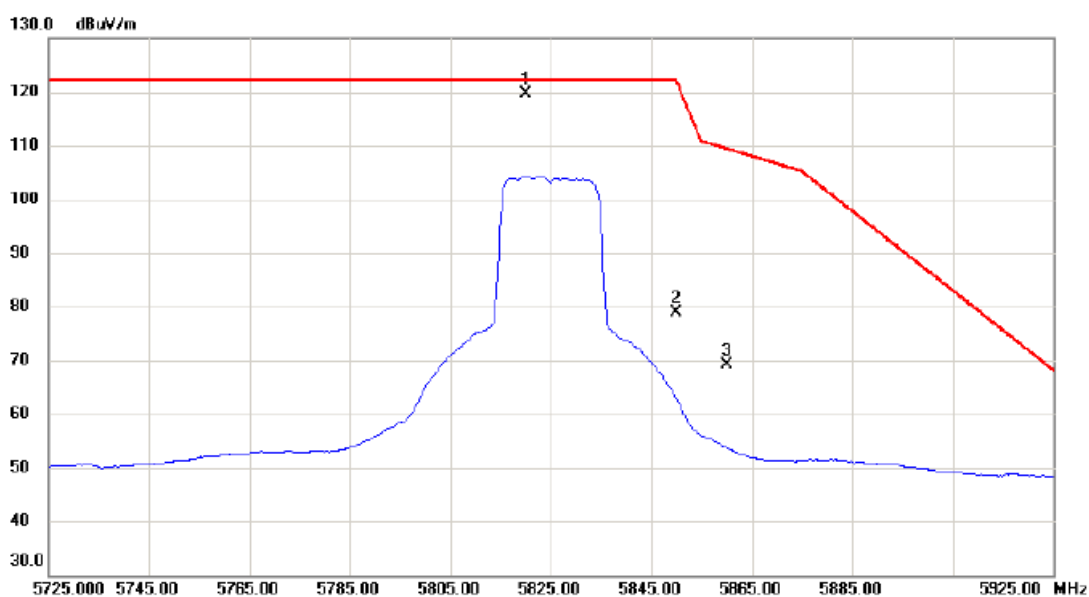

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	5820.000	104.14	15.39	119.53	122.20	-2.67	peak	主波訊號不予判定
2		5850.000	63.52	15.43	78.95	122.20	-43.25	peak	
3		5860.000	53.81	15.44	69.25	109.40	-40.15	peak	

測試頻道: IEEE 802.11ax (HE20) /
5825 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢測器: Peak/AV


測試日期: 108/06/22

環境溫度: 24 °C

環境濕度: 52%

Orthogonal Axis: X

Polarization: Vertical

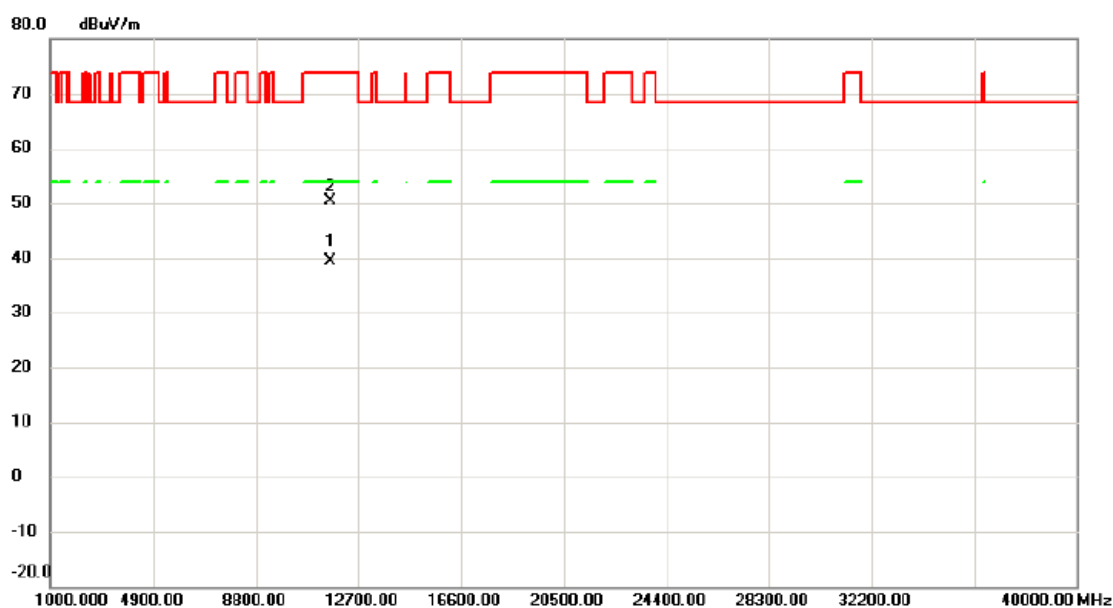

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	11650.230	23.14	16.32	39.46	54.00	-14.54	AVG	
2		11650.820	33.98	16.32	50.30	74.00	-23.70	peak	

測試頻道: IEEE 802.11ax (HE20) /
5825 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢測器: Peak/AV


測試日期: 108/06/21

環境溫度: 24 °C

環境濕度: 52%

Orthogonal Axis: X

Polarization: Horizontal

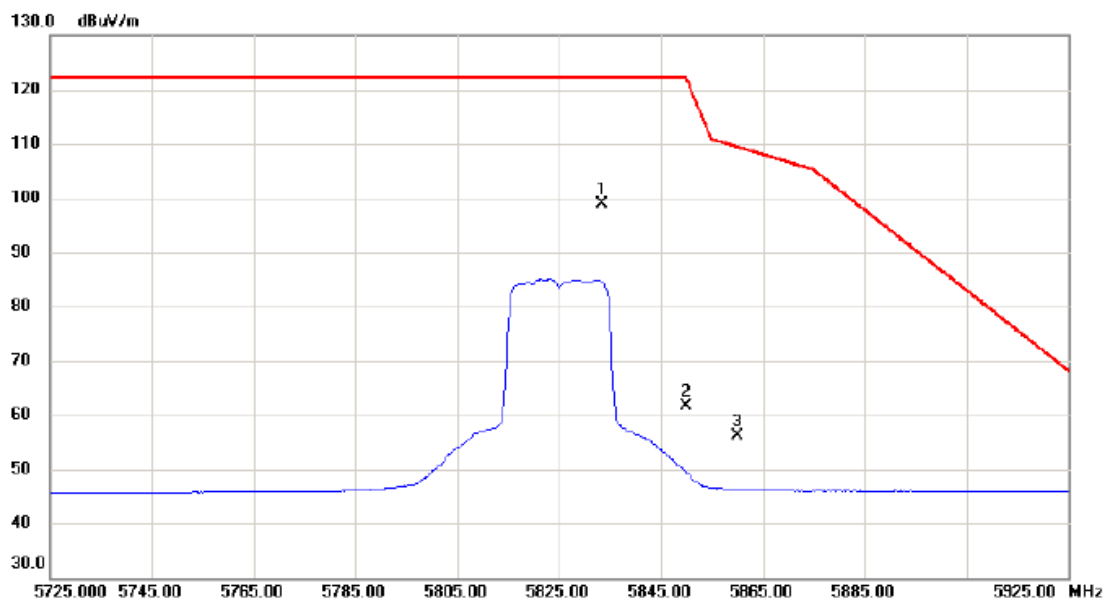

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	5833.500	83.48	15.40	98.88	122.20	-23.32	peak	主波訊號不予判定
2		5850.000	46.29	15.43	61.72	122.20	-60.48	peak	
3		5860.000	40.57	15.44	56.01	109.40	-53.39	peak	

測試頻道: IEEE 802.11ax (HE20) /
5825 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢測器: Peak/AV


測試日期: 108/06/22

環境溫度: 24 °C

環境濕度: 52%

Orthogonal Axis: X

Polarization: Horizontal

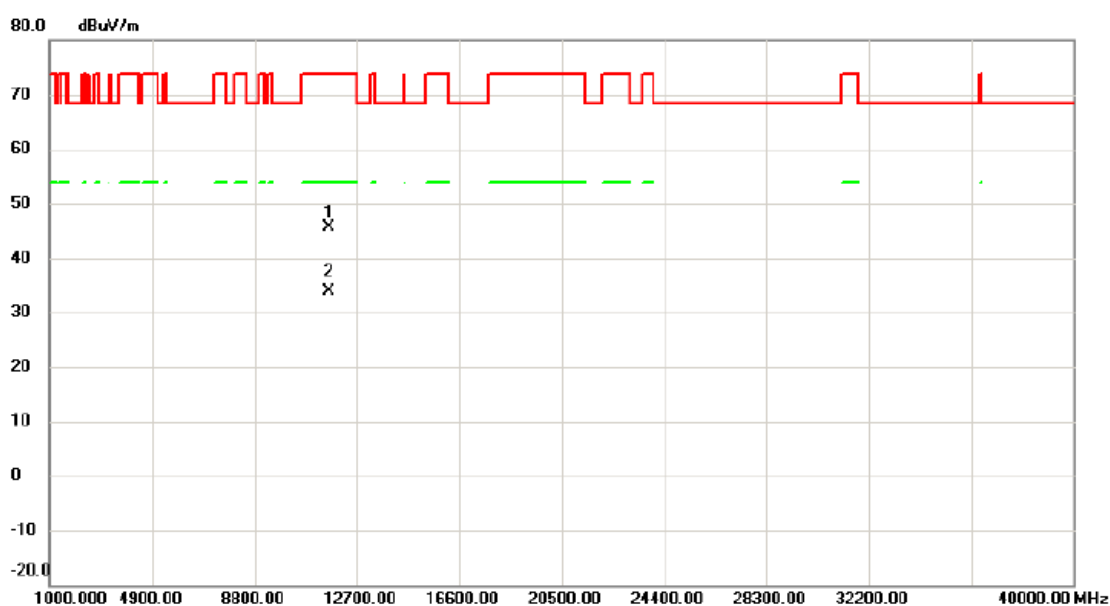

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11644.820	29.20	16.33	45.53	74.00	-28.47	peak	
2	*	11647.930	17.64	16.33	33.97	54.00	-20.03	AVG	

測試頻道: IEEE 802.11ax (HE40) /
5755 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢測器: Peak/AV


測試日期: 108/06/21

環境溫度: 24 °C

環境濕度: 52%

Orthogonal Axis: X

Polarization: Vertical

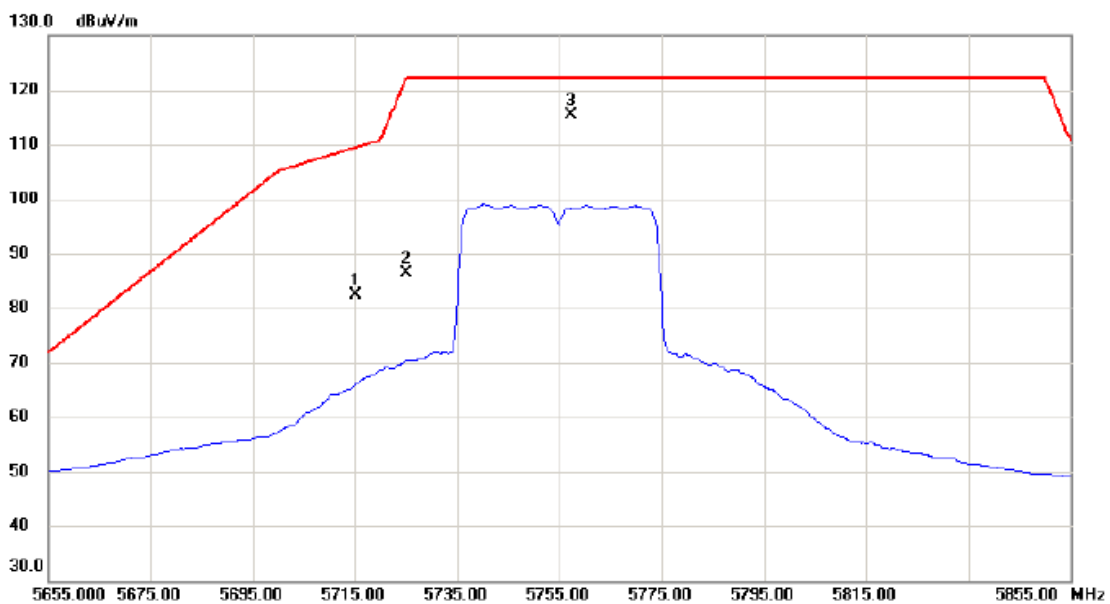

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5715.000	67.07	15.26	82.33	109.40	-27.07	peak	
2		5725.000	71.07	15.27	86.34	122.20	-35.86	peak	
3 *		5757.400	99.96	15.31	115.27	122.20	-6.93	peak	主波訊號不予判定

測試頻道: IEEE 802.11ax (HE40) /
5755 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢測器: Peak/AV


測試日期: 108/06/22

環境溫度: 24 °C

環境濕度: 52%

Orthogonal Axis: X

Polarization: Vertical

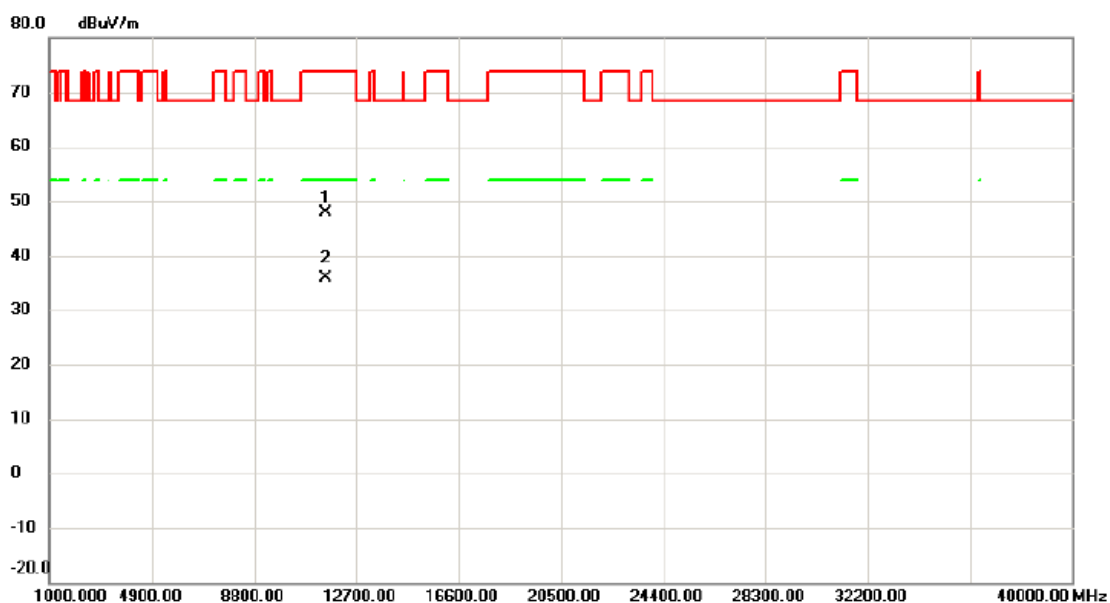


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11505.020	31.14	16.74	47.88	74.00	-26.12	peak	
2	*	11509.480	19.22	16.73	35.95	54.00	-18.05	AVG	

測試頻道: IEEE 802.11ax (HE40) /
5755 MHz
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢測器: Peak/AV
環境溫度: 24 °C

測試模式: 發射
視頻頻寬: 1000 kHz / 10 Hz
測試距離: 3 米
測試日期: 108/06/21
環境濕度: 52%

Orthogonal Axis: X

Polarization: Horizontal

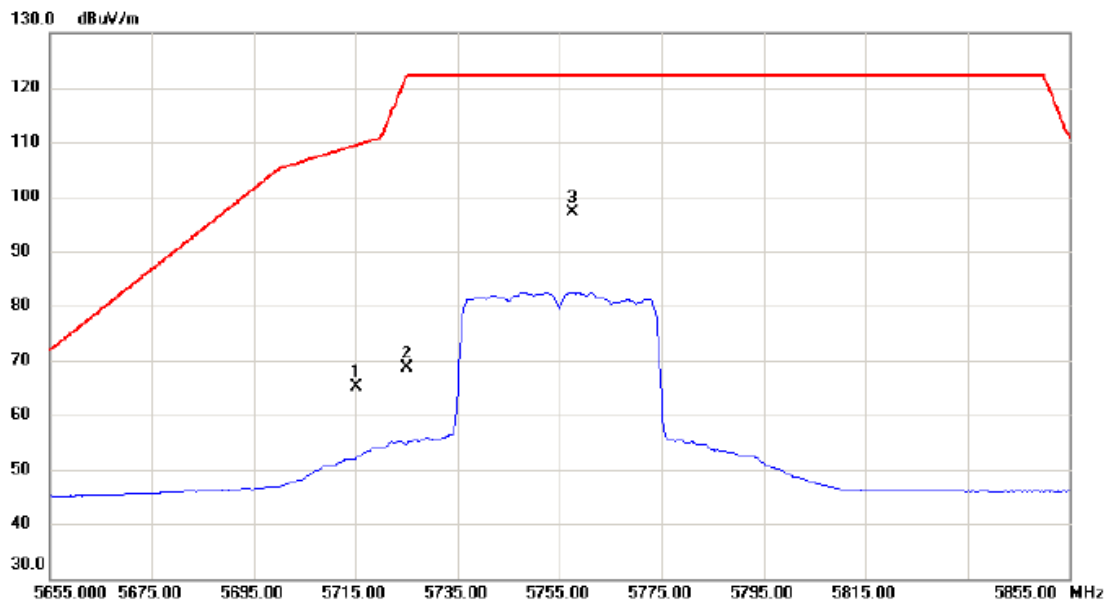

No.	Mk.	Freq. MHz	Reading Level dBμV	Correct Factor dB	Measure- ment dBμV/m	Limit dBμV/m	Margin dB	Detector	Comment
1		5715.000	49.92	15.26	65.18	109.40	-44.22	peak	
2		5725.000	53.26	15.27	68.53	122.20	-53.67	peak	
3	*	5757.500	81.74	15.31	97.05	122.20	-25.15	peak	主波訊號不予判定

測試頻道: IEEE 802.11ax (HE40) /
5755 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢測器: Peak/AV


測試日期: 108/06/22

環境溫度: 24 °C

環境濕度: 52%

Orthogonal Axis: X

Polarization: Horizontal

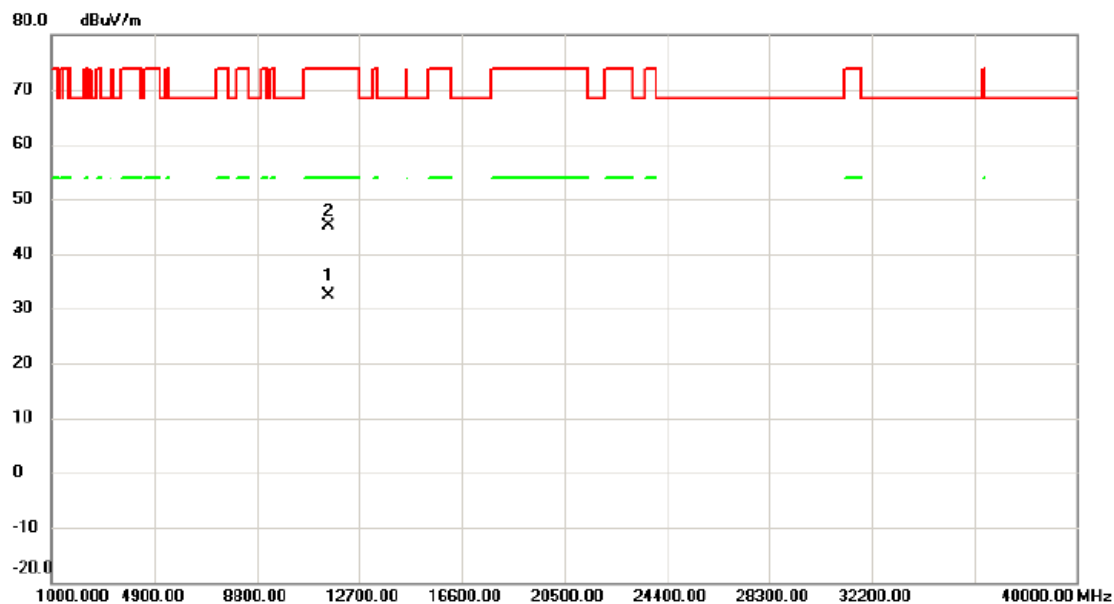

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	11507.910	15.68	16.73	32.41	54.00	-21.59	AVG	
2		11516.560	28.32	16.70	45.02	74.00	-28.98	peak	

測試頻道: IEEE 802.11ax (HE40) /
5795 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢測器: Peak/AV


測試日期: 108/06/21

環境溫度: 24 °C

環境濕度: 52%

Orthogonal Axis: X

Polarization: Vertical

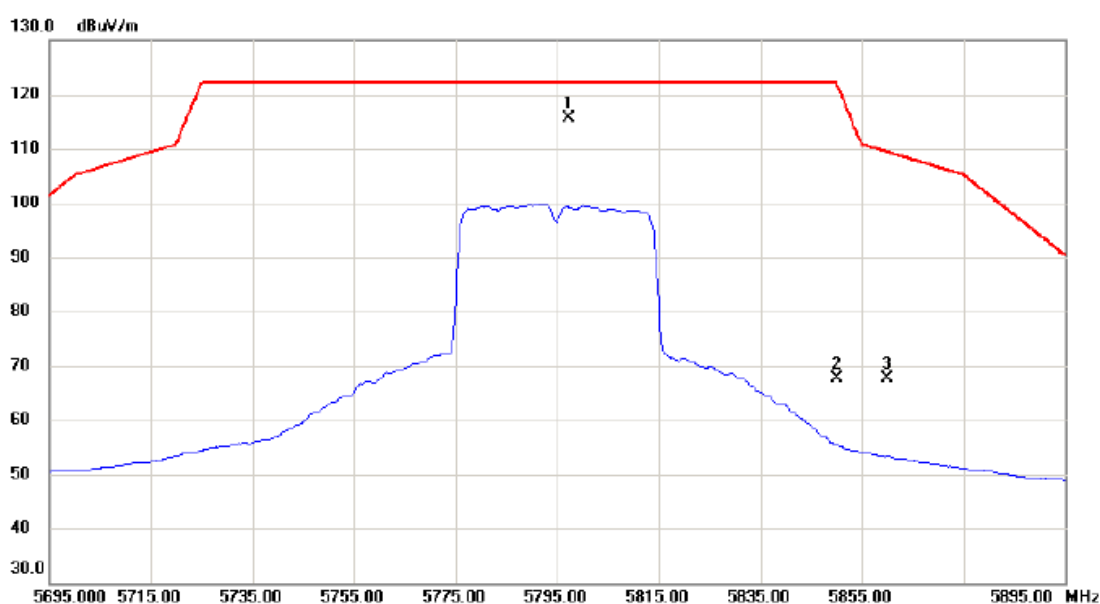

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	5797.300	100.35	15.37	115.72	122.20	-6.48	peak	主波訊號不予判定
2		5850.000	52.31	15.43	67.74	122.20	-54.46	peak	
3		5860.000	52.14	15.44	67.58	109.40	-41.82	peak	

測試頻道: IEEE 802.11ax (HE40) /
5795 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢測器: Peak/AV


測試日期: 108/06/22

環境溫度: 24 °C

環境濕度: 52%

Orthogonal Axis: X

Polarization: Vertical

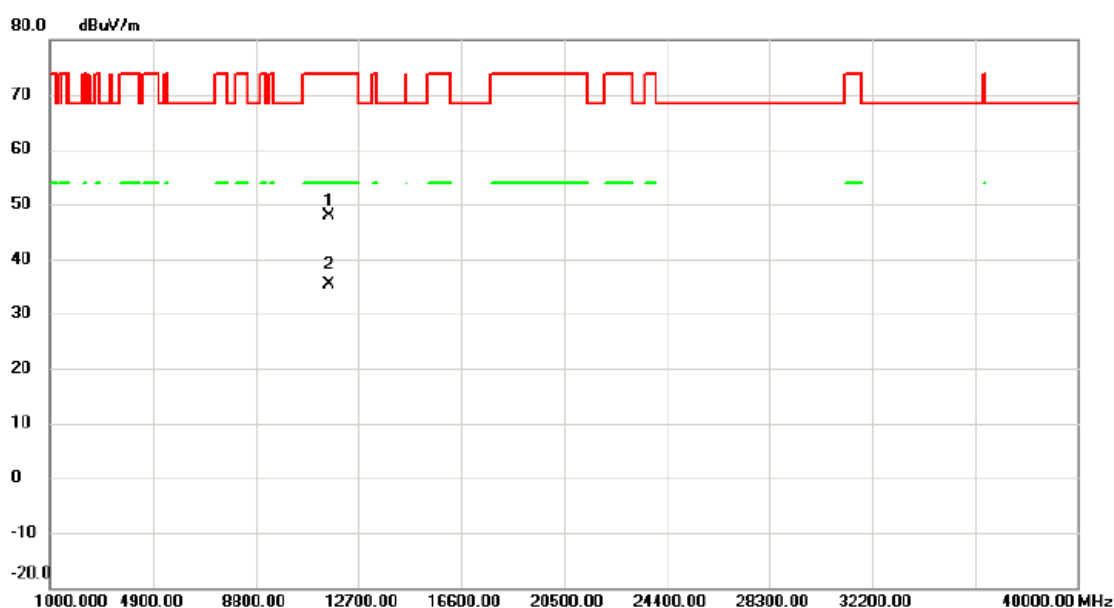

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11584.710	31.40	16.51	47.91	74.00	-26.09	peak	
2	*	11585.410	18.86	16.51	35.37	54.00	-18.63	AVG	

測試頻道: IEEE 802.11ax (HE40) /
5795 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢測器: Peak/AV


測試日期: 108/06/21

環境溫度: 24 °C

環境濕度: 52%

Orthogonal Axis: X

Polarization: Horizontal

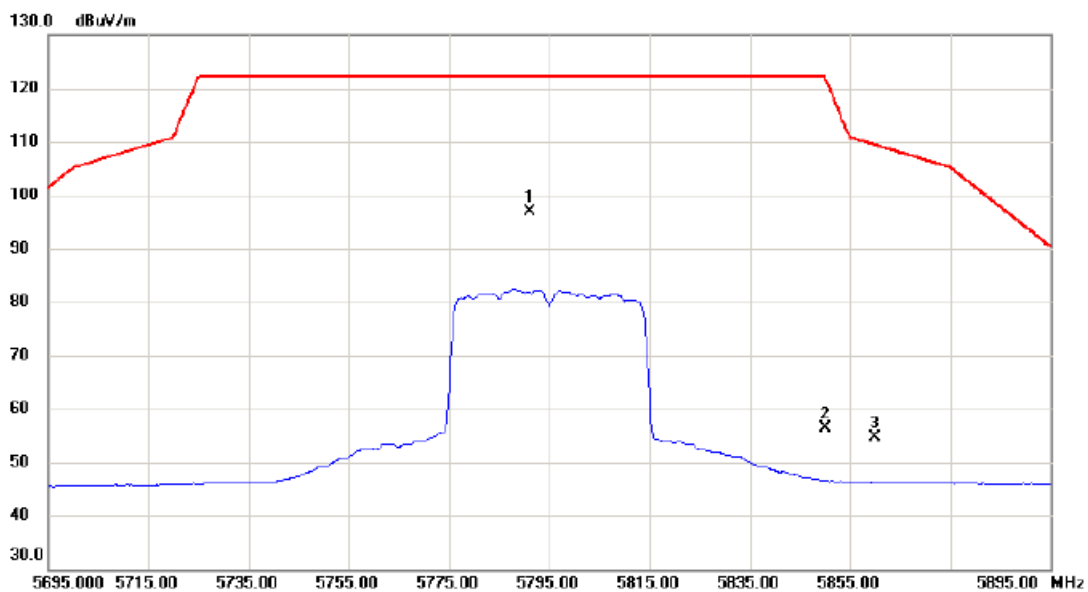

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	5791.000	81.48	15.35	96.83	122.20	-25.37	peak	主波訊號不予判定
2		5850.000	41.02	15.43	56.45	122.20	-65.75	peak	
3		5860.000	39.09	15.44	54.53	109.40	-54.87	peak	

測試頻道: IEEE 802.11 ax (HE40) /
5795 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢測器: Peak/AV


測試日期: 108/06/22

環境溫度: 24 °C

環境濕度: 52%

Orthogonal Axis: X

Polarization: Horizontal

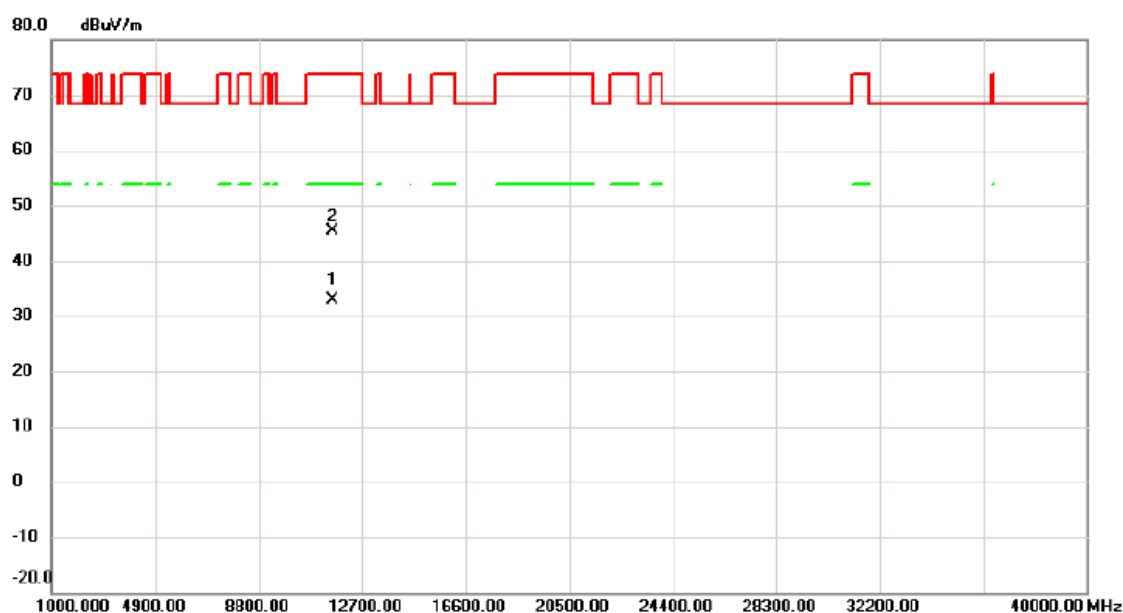

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	11588.280	16.50	16.49	32.99	54.00	-21.01	AVG	
2		11596.250	28.94	16.48	45.42	74.00	-28.58	peak	

測試頻道: IEEE 802.11ax (HE80) /
5775 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢測器: Peak/AV


測試日期: 108/06/21

環境溫度: 24 °C

環境濕度: 52%

Orthogonal Axis: X

Polarization: Vertical

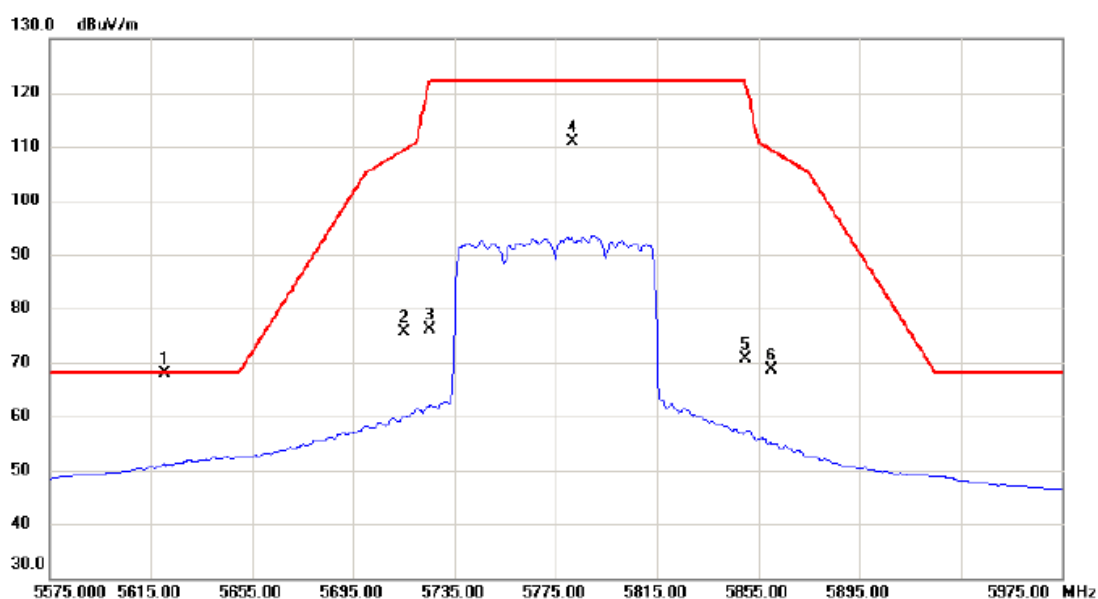

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	5620.400	52.76	15.14	67.90	68.20	-0.30	peak	
2		5715.000	60.38	15.26	75.64	109.40	-33.76	peak	
3		5725.000	60.79	15.27	76.06	122.20	-46.14	peak	
4		5781.800	95.51	15.34	110.85	122.20	-11.35	peak	主波訊號不予判定
5		5850.000	55.21	15.43	70.64	122.20	-51.56	peak	
6		5860.000	53.14	15.44	68.58	109.40	-40.82	peak	

測試頻道: IEEE 802.11ax (HE80) /
5775 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢測器: Peak/AV


測試日期: 108/06/22

環境溫度: 24 °C

環境濕度: 52%

Orthogonal Axis: X

Polarization: Vertical

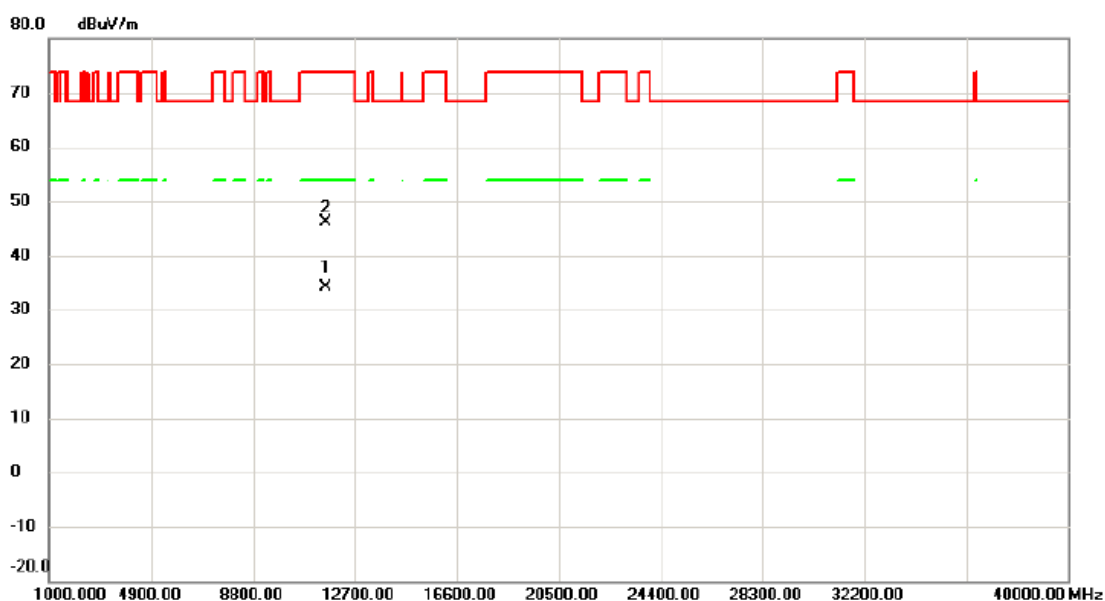

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	11556.520	17.66	16.59	34.25	54.00	-19.75	AVG	
2		11559.670	29.56	16.58	46.14	74.00	-27.86	peak	

測試頻道: IEEE 802.11ax (HE80) /
5775 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢測器: Peak/AV


測試日期: 108/06/21

環境溫度: 24 °C

環境濕度: 52%

Orthogonal Axis: X

Polarization: Horizontal

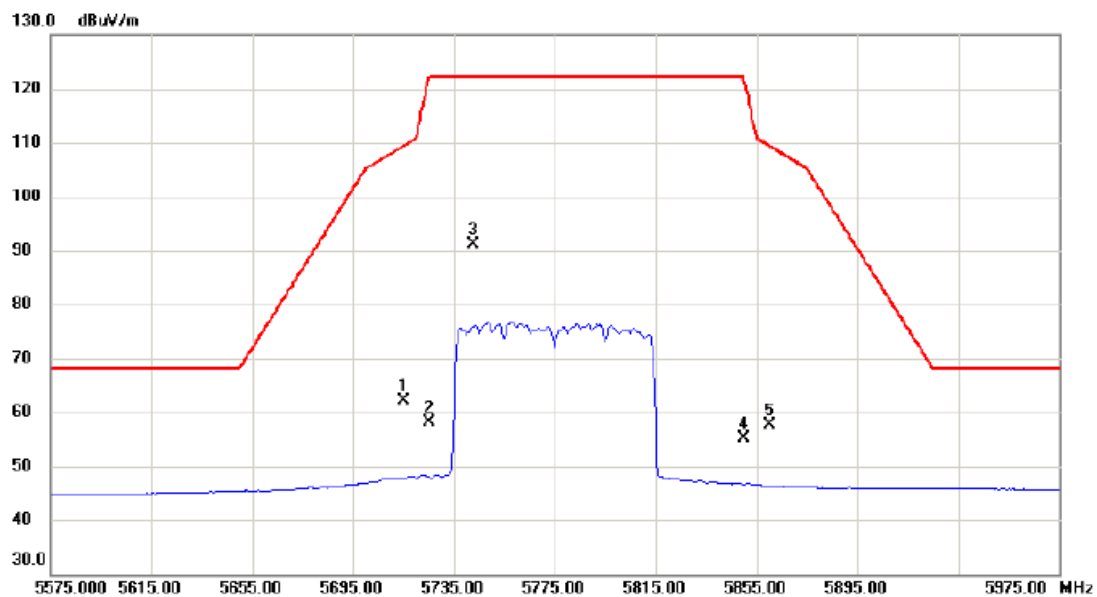

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5715.000	46.75	15.26	62.01	109.40	-47.39	peak	
2		5725.000	42.96	15.27	58.23	122.20	-63.97	peak	
3	*	5742.600	75.89	15.29	91.18	122.20	-31.02	peak	主波訊號不予判定
4		5850.000	39.67	15.43	55.10	122.20	-67.10	peak	
5		5860.000	42.26	15.44	57.70	109.40	-51.70	peak	

測試頻道: IEEE 802.11ax (HE80) /
5775 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢測器: Peak/AV


測試日期: 108/06/22

環境溫度: 24 °C

環境濕度: 52%

Orthogonal Axis: X

Polarization: Horizontal

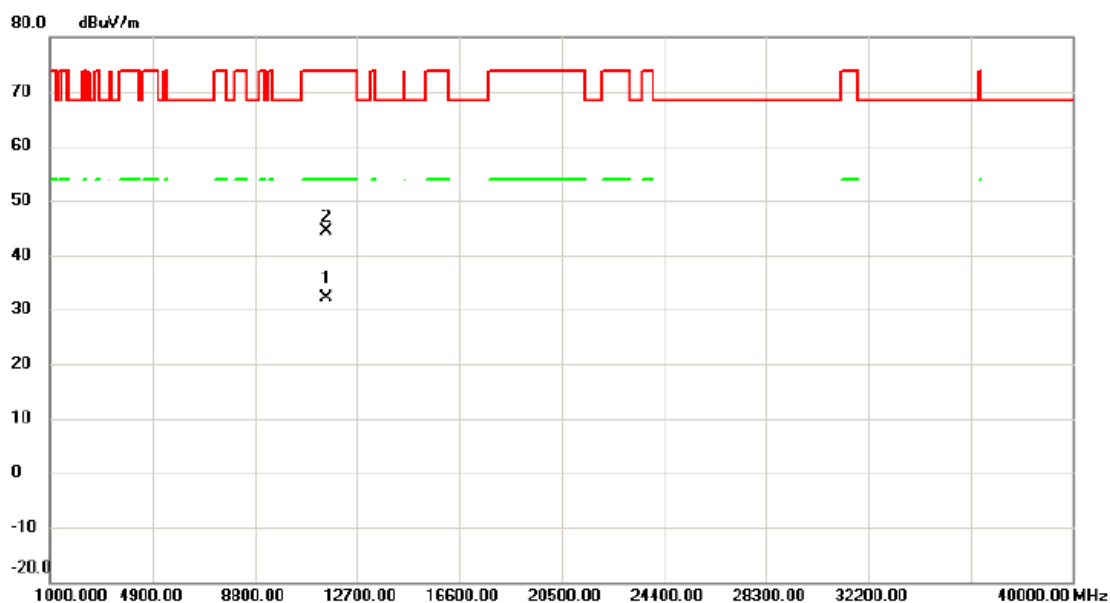

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	11550.170	15.62	16.61	32.23	54.00	-21.77	AVG	
2		11551.850	27.72	16.61	44.33	74.00	-29.67	peak	


Beamforming

測試頻道: IEEE 802.11ac (VHT20) /
5180 MHz
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢測器: Peak/AV
環境溫度: 24 °C

測試模式: 發射
視頻頻寬: 1000 kHz / 10 Hz
測試距離: 3 米
測試日期: 108/06/22
環境濕度: 52%

Orthogonal Axis: X

Polarization: Vertical

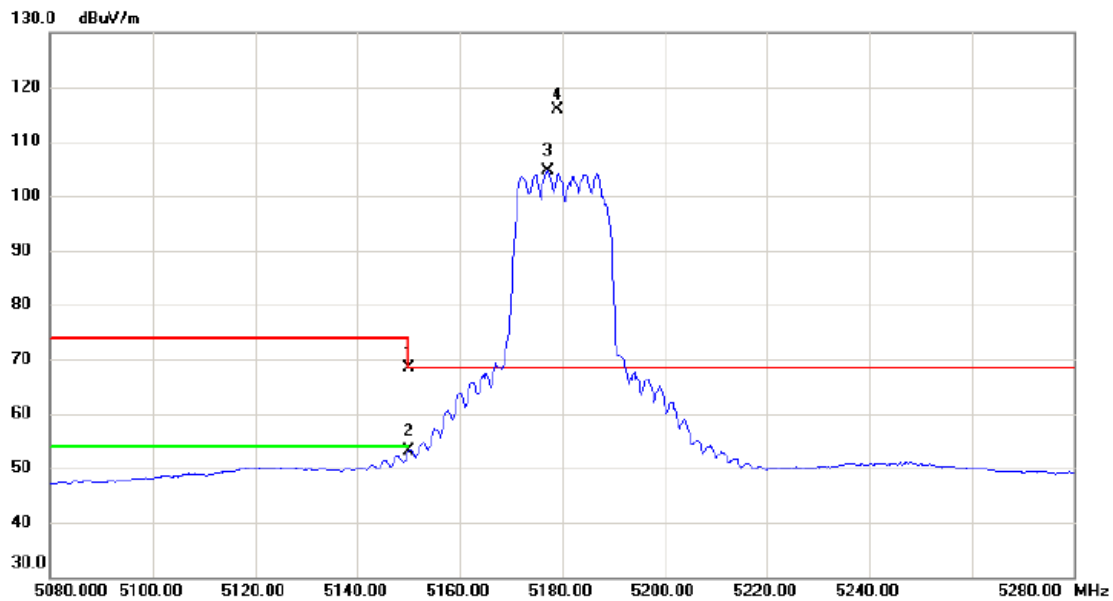


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5150.000	53.94	14.36	68.30	74.00	-5.70	peak	
2		5150.000	38.73	14.36	53.09	54.00	-0.91	AVG	
3	X	5177.200	90.17	14.41	104.58	68.30	36.28	AVG	主波訊號不予判定
4	*	5179.200	101.46	14.41	115.87	68.30	47.57	peak	主波訊號不予判定

測試頻道: IEEE 802.11ac (VHT20) /
 5180 MHz
 解析頻寬: 1000 kHz / 1000 kHz
 量測天線: Horn Antenna
 檢測器: Peak/AV
 環境溫度: 24 °C

測試模式: 發射
 視頻頻寬: 1000 kHz / 10 Hz
 測試距離: 3 米
 測試日期: 108/06/26
 環境濕度: 52%

Orthogonal Axis: X

Polarization: Vertical

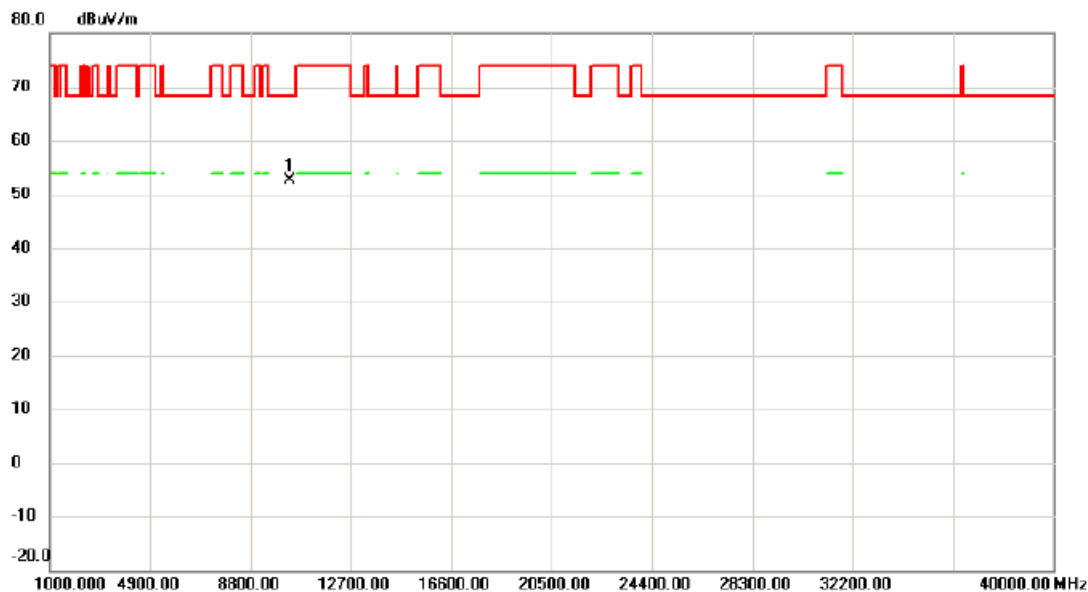


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	10359.335	38.52	14.13	52.65	68.30	-15.65	peak	

測試頻道: IEEE 802.11ac (VHT20) /
5180 MHz
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢測器: Peak/AV
環境溫度: 24 °C

測試模式: 發射
視頻頻寬: 1000 kHz / 10 Hz
測試距離: 3 米
測試日期: 108/06/22
環境濕度: 52%

Orthogonal Axis: X

Polarization: Horizontal

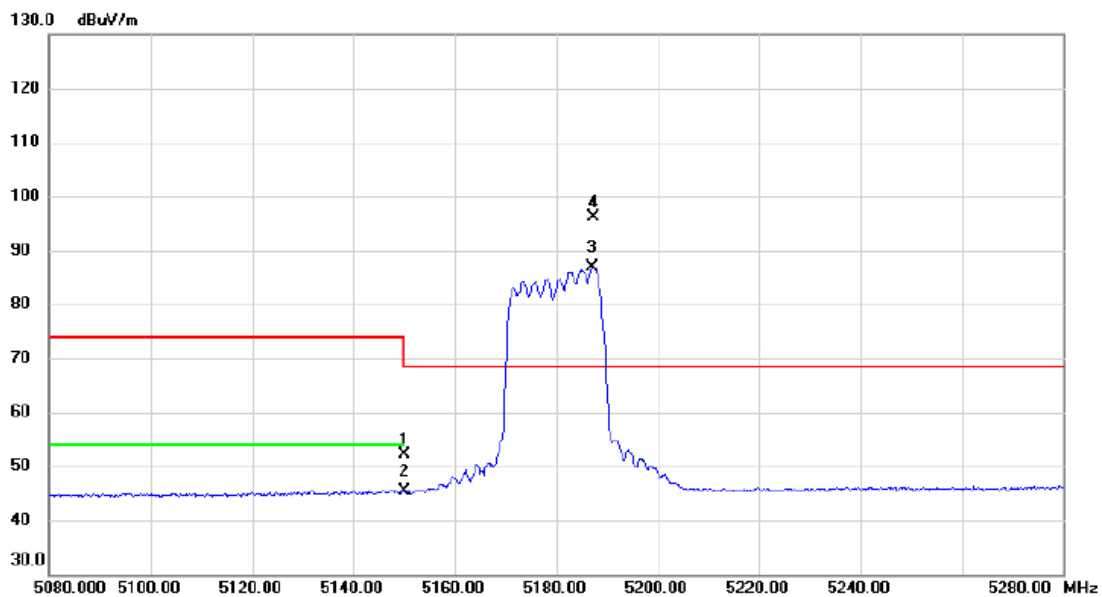

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5150.000	37.77	14.36	52.13	74.00	-21.87	peak	
2		5150.000	31.03	14.36	45.39	54.00	-8.61	AVG	
3	X	5187.200	72.54	14.42	86.96	68.30	18.66	AVG	主波訊號不予判定
4	*	5187.400	81.73	14.42	96.15	68.30	27.85	peak	主波訊號不予判定

測試頻道: IEEE 802.11ac (VHT20) /
5180 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢測器: Peak/AV


測試日期: 108/06/26

環境溫度: 24 °C

環境濕度: 52%

Orthogonal Axis: X

Polarization: Horizontal

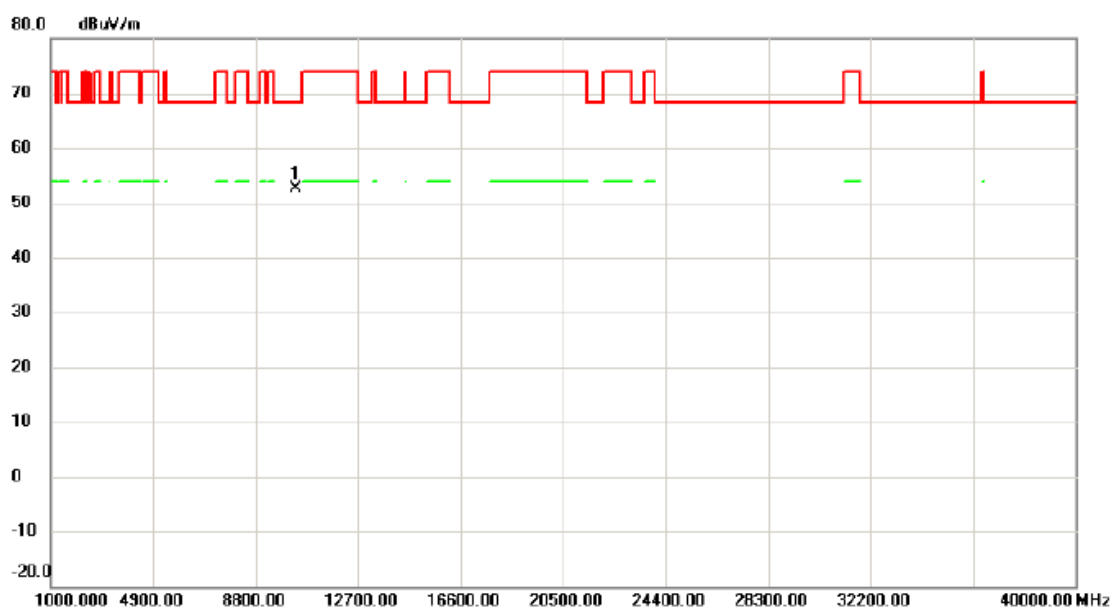

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	10359.835	38.47	14.13	52.60	68.30	-15.70	peak	

測試頻道: IEEE 802.11ac (VHT20) /
5200 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢測器: Peak/AV


測試日期: 108/06/22

環境溫度: 24 °C

環境濕度: 52%

Orthogonal Axis: X

Polarization: Vertical

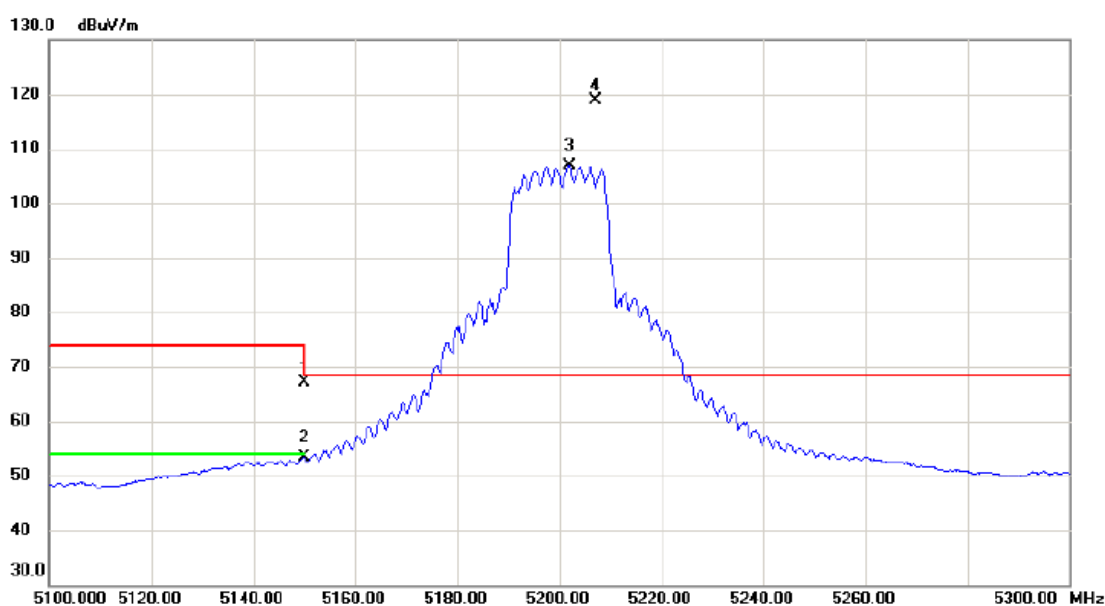

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5150.000	52.74	14.36	67.10	74.00	-6.90	peak	
2		5150.000	39.06	14.36	53.42	54.00	-0.58	AVG	
3	X	5201.900	92.44	14.45	106.89	68.30	38.59	AVG	主波訊號不予判定
4	*	5207.000	104.48	14.46	118.94	68.30	50.64	peak	主波訊號不予判定

測試頻道: IEEE 802.11ac (VHT20) /
5200 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢測器: Peak/AV


測試日期: 108/06/26

環境溫度: 24 °C

環境濕度: 52%

Orthogonal Axis: X

Polarization: Vertical

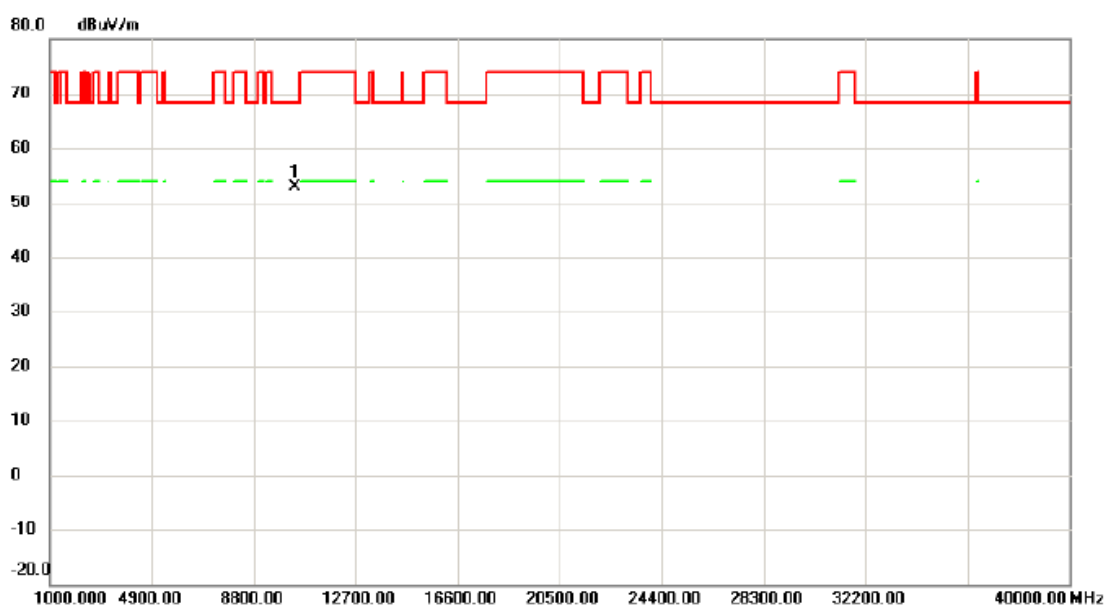

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10401.050	38.72	14.26	52.98	68.30	-15.32	peak	

測試頻道: IEEE 802.11ac (VHT20) /
5200 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢測器: Peak/AV


測試日期: 108/06/22

環境溫度: 24 °C

環境濕度: 52%

Orthogonal Axis: X

Polarization: Horizontal

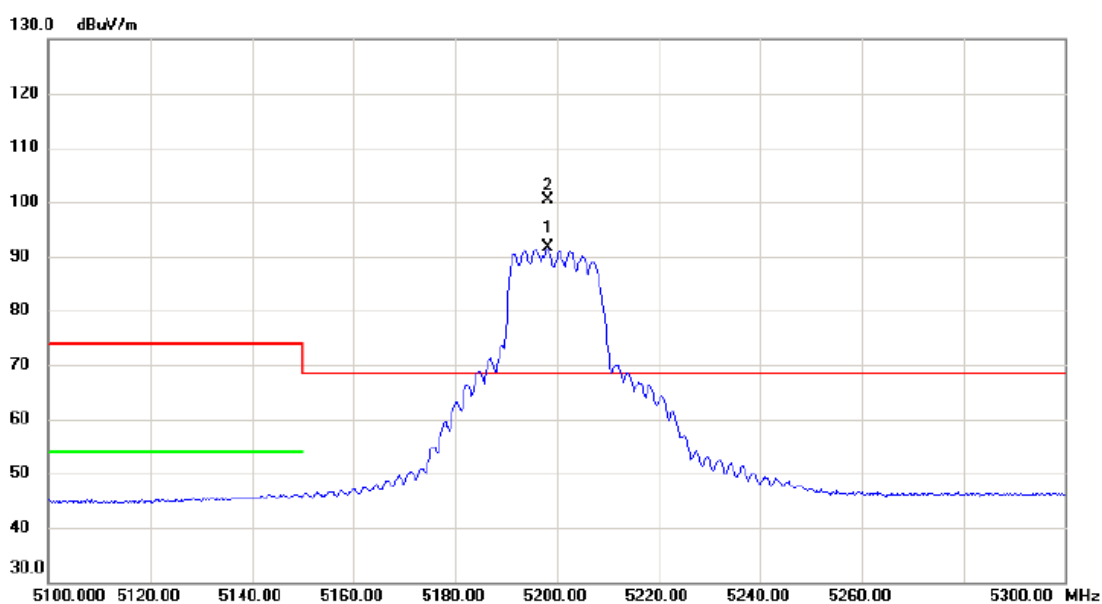

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	5198.200	77.14	14.45	91.59	68.30	23.29	AVG	主波訊號不予判定
2	*	5198.400	85.90	14.45	100.35	68.30	32.05	peak	主波訊號不予判定

測試頻道: IEEE 802.11ac (VHT20) /
5200 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢測器: Peak/AV


測試日期: 108/06/26

環境溫度: 24 °C

環境濕度: 52%

Orthogonal Axis: X

Polarization: Horizontal

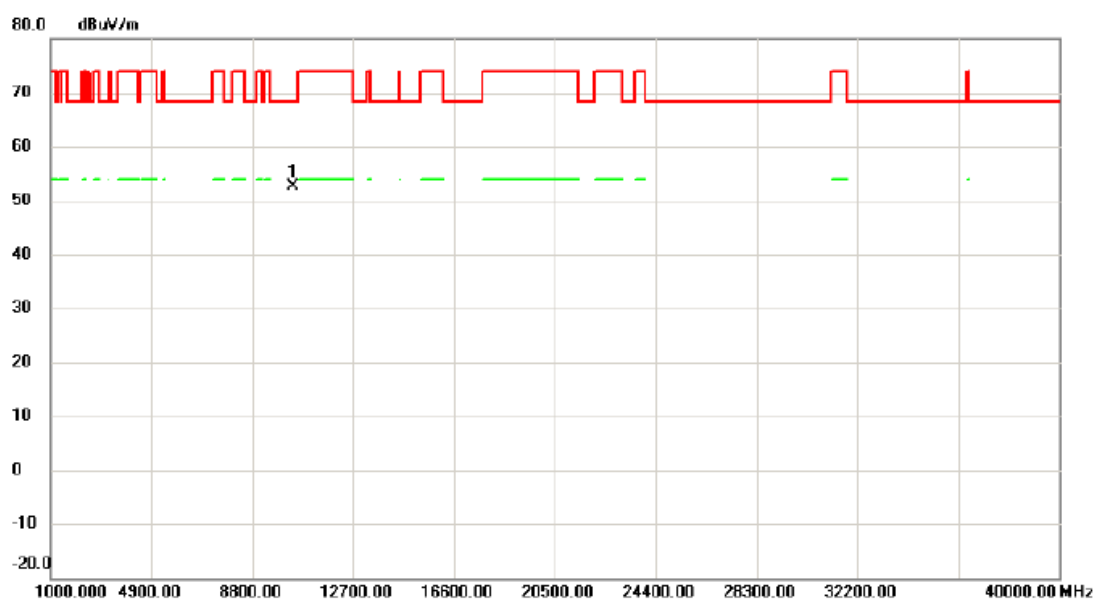

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10402.460	38.30	14.26	52.56	68.30	-15.74	peak	

測試頻道: IEEE 802.11ac (VHT20) / 5240 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢測器: Peak/AV


測試日期: 108/06/22

環境溫度: 24 °C

環境濕度: 52%

Orthogonal Axis: X

Polarization: Vertical

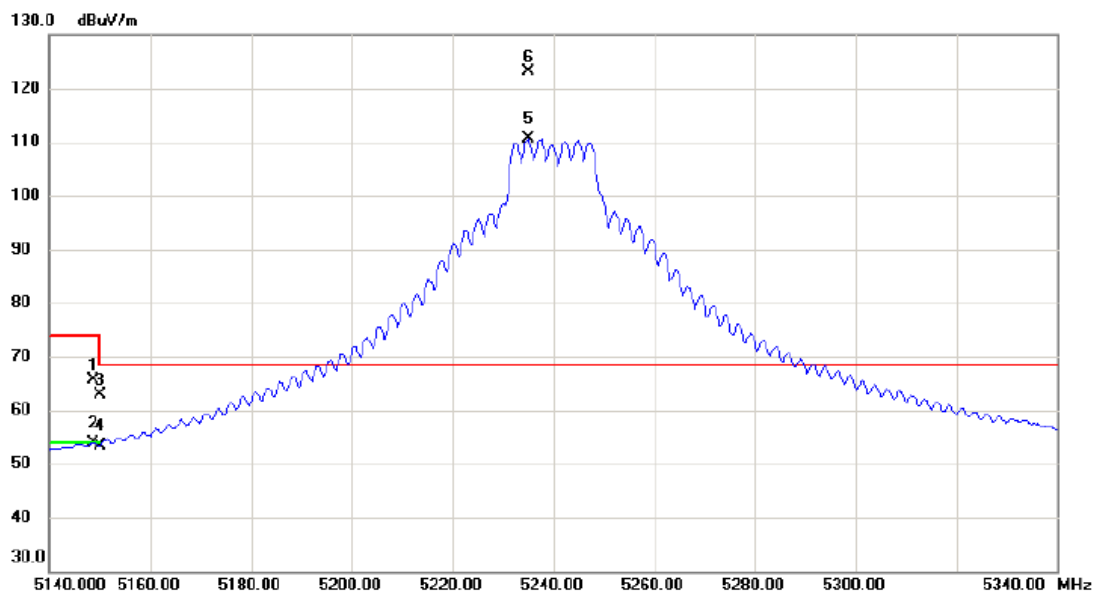

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5148.700	51.36	14.36	65.72	74.00	-8.28	peak	
2		5148.700	39.62	14.36	53.98	54.00	-0.02	AVG	
3		5150.000	48.57	14.36	62.93	74.00	-11.07	peak	
4		5150.000	39.07	14.36	53.43	54.00	-0.57	AVG	
5	X	5235.000	96.09	14.51	110.60	68.30	42.30	AVG	主波訊號不予判定
6	*	5235.100	108.64	14.51	123.15	68.30	54.85	peak	主波訊號不予判定

測試頻道: IEEE 802.11ac (VHT20) /
5240 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢測器: Peak/AV


測試日期: 108/06/26

環境溫度: 24 °C

環境濕度: 52%

Orthogonal Axis: X

Polarization: Vertical

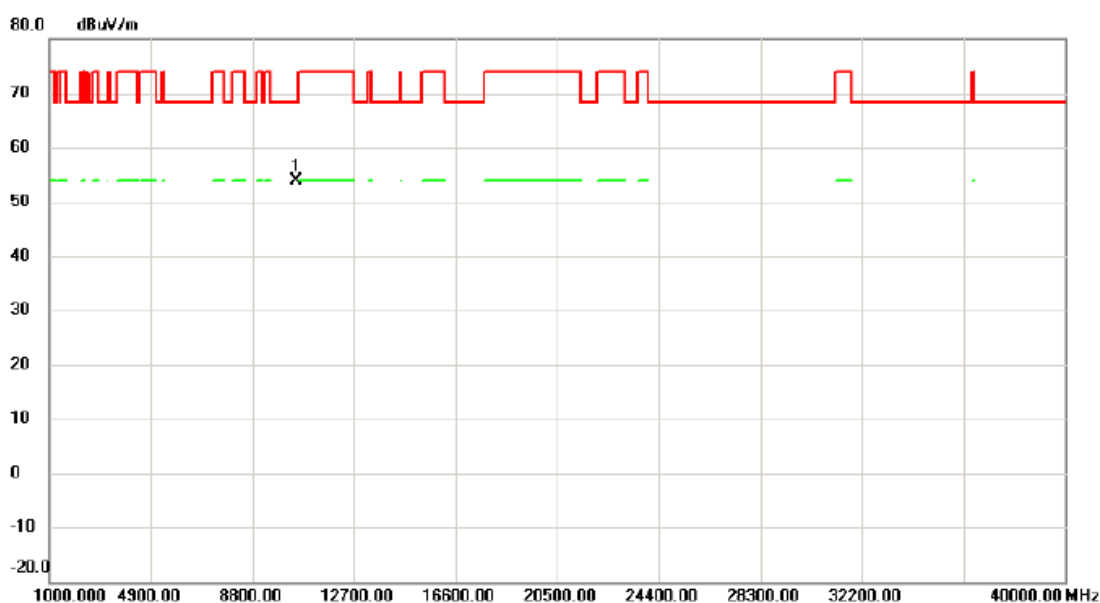


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	10480.740	39.34	14.53	53.87	68.30	-14.43	peak	

測試頻道: IEEE 802.11ac (VHT20) /
5240 MHz
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢測器: Peak/AV
環境溫度: 24 °C

測試模式: 發射
視頻頻寬: 1000 kHz / 10 Hz
測試距離: 3 米
測試日期: 108/06/22
環境濕度: 52%

Orthogonal Axis: X

Polarization: Horizontal

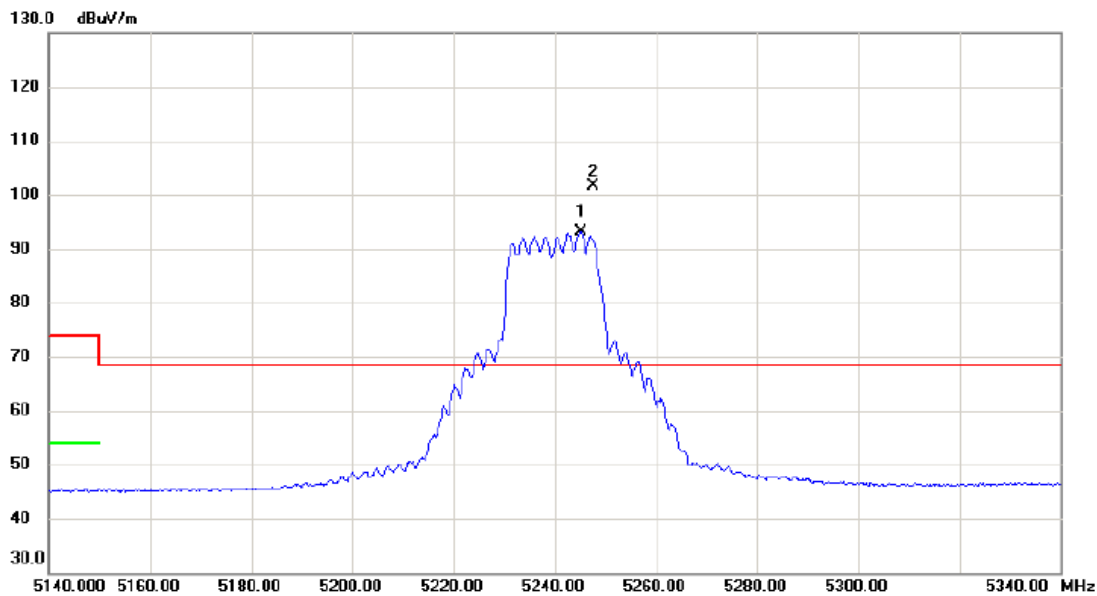

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	5245.200	78.59	14.53	93.12	68.30	24.82	AVG	主波訊號不予判定
2	*	5247.600	87.15	14.53	101.68	68.30	33.38	peak	主波訊號不予判定

測試頻道: IEEE 802.11ac (VHT20) /
5240 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢測器: Peak/AV


測試日期: 108/06/26

環境溫度: 24 °C

環境濕度: 52%

Orthogonal Axis: X

Polarization: Horizontal

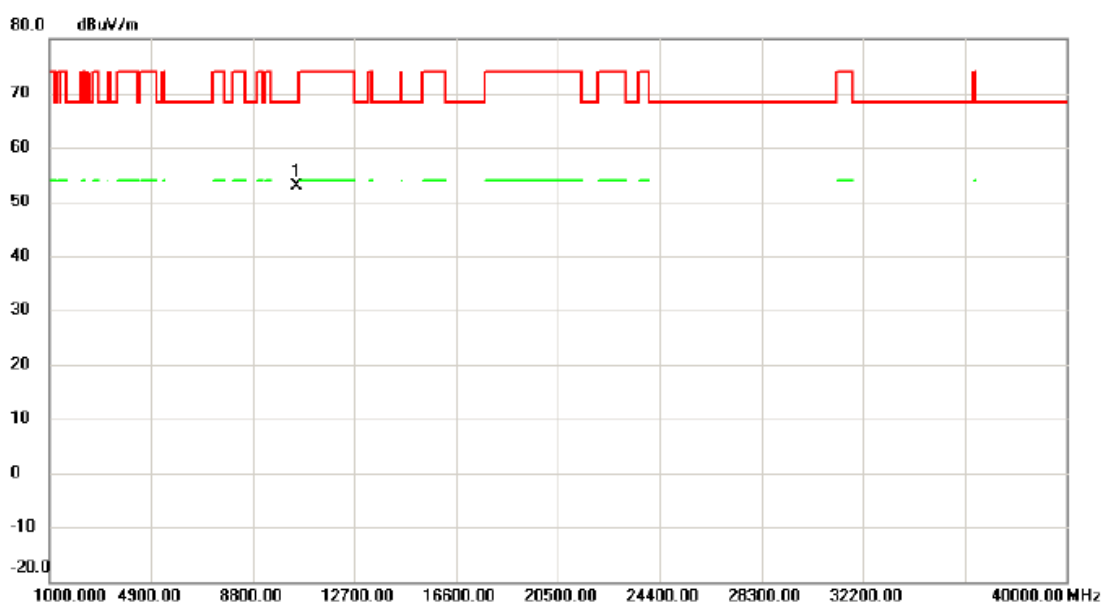

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	10478.195	38.47	14.52	52.99	68.30	-15.31	peak	

測試頻道: IEEE 802.11ac (VHT40) /
5190 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢測器: Peak/AV


測試日期: 108/06/22

環境溫度: 24 °C

環境濕度: 52%

Orthogonal Axis: X

Polarization: Vertical

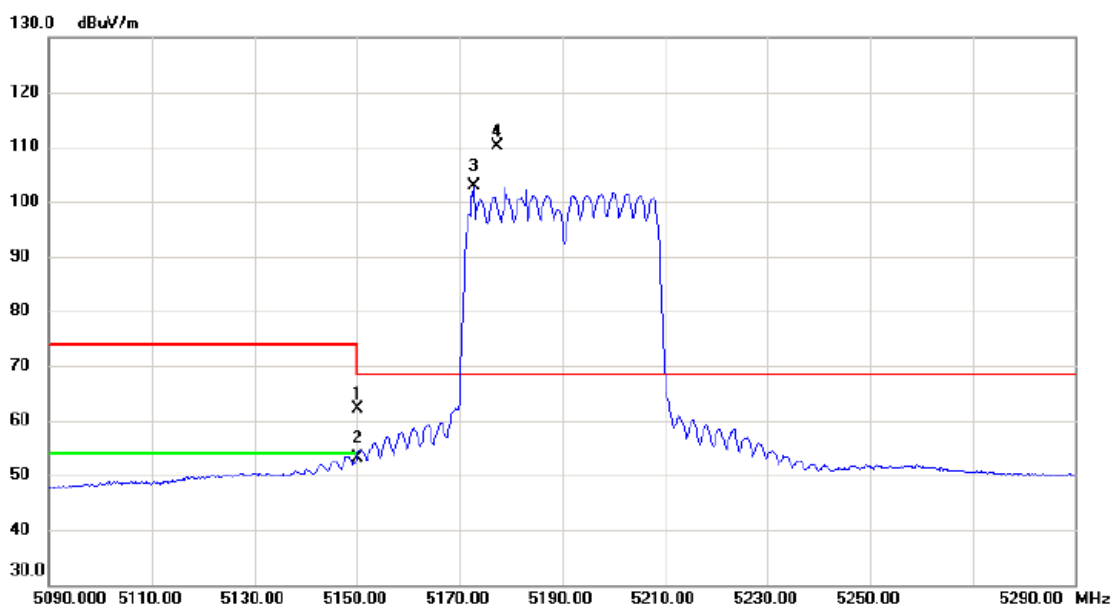

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5150.000	47.76	14.36	62.12	74.00	-11.88	peak	
2		5150.000	38.80	14.36	53.16	54.00	-0.84	AVG	
3	X	5172.900	88.42	14.40	102.82	68.30	34.52	AVG	主波訊號不予判定
4	*	5177.400	95.76	14.41	110.17	68.30	41.87	peak	主波訊號不予判定

測試頻道: IEEE 802.11ac (VHT40) /
5190 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢測器: Peak/AV


測試日期: 108/06/26

環境溫度: 24 °C

環境濕度: 52%

Orthogonal Axis: X

Polarization: Vertical

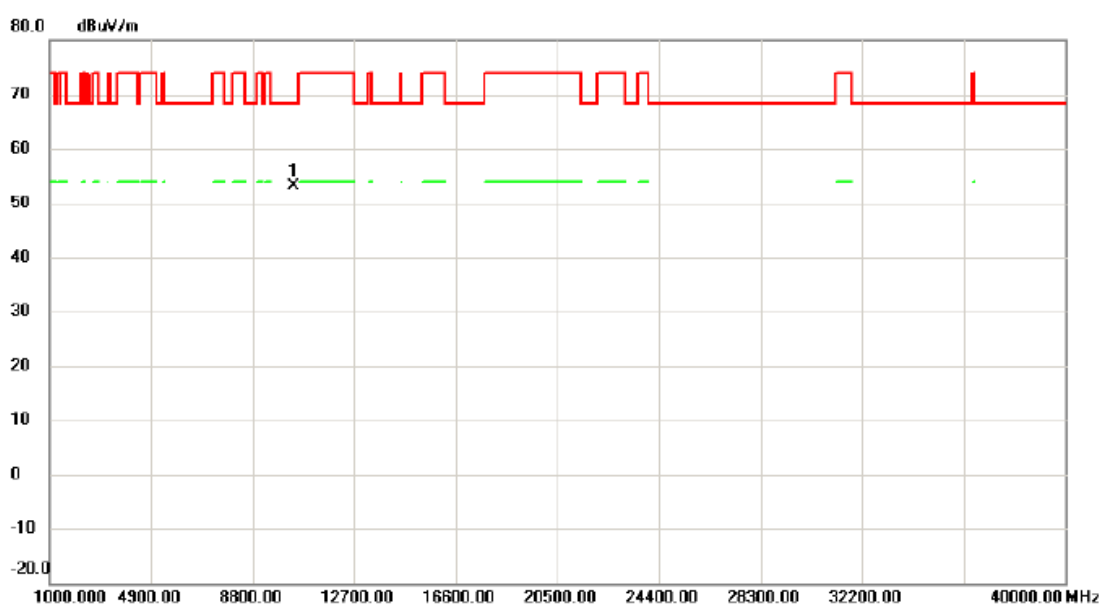

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	10378.780	38.97	14.19	53.16	68.30	-15.14	peak	

測試頻道: IEEE 802.11ac (VHT40) /
5190 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢測器: Peak/AVG


測試日期: 108/06/22

環境溫度: 24 °C

環境濕度: 52%

Orthogonal Axis: X

Polarization: Horizontal

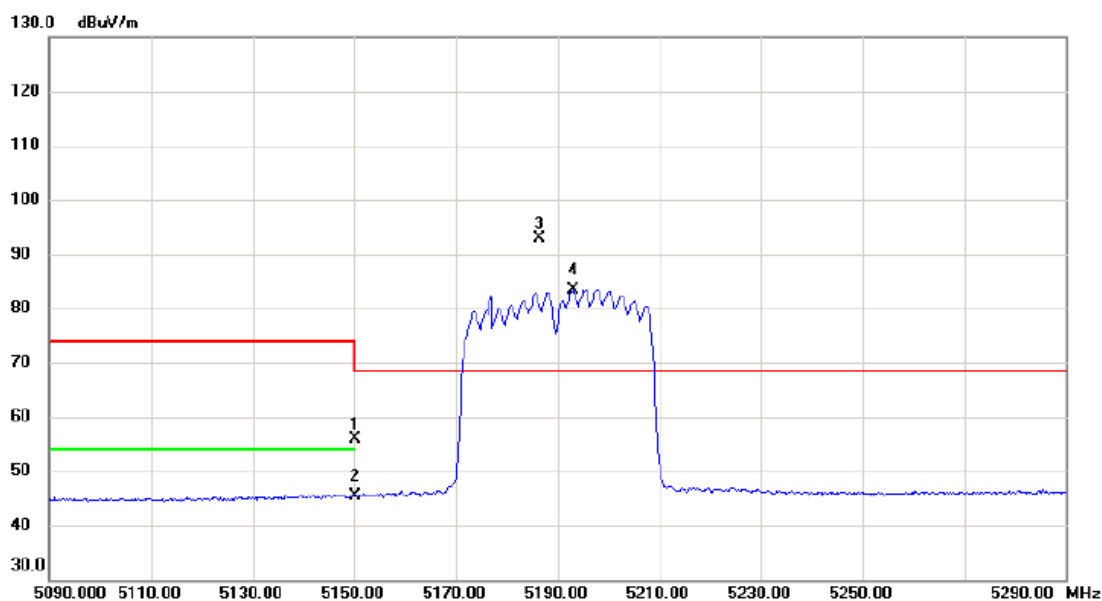

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5150.000	41.63	14.36	55.99	74.00	-18.01	peak	
2		5150.000	30.92	14.36	45.28	54.00	-8.72	AVG	
3	*	5186.400	78.37	14.42	92.79	68.30	24.49	peak	主波訊號不予判定
4	X	5193.000	68.96	14.43	83.39	68.30	15.09	AVG	主波訊號不予判定

測試頻道: IEEE 802.11ac (VHT40) /
5190 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢測器: Peak/AV


測試日期: 108/06/26

環境溫度: 24 °C

環境濕度: 52%

Orthogonal Axis: X

Polarization: Horizontal

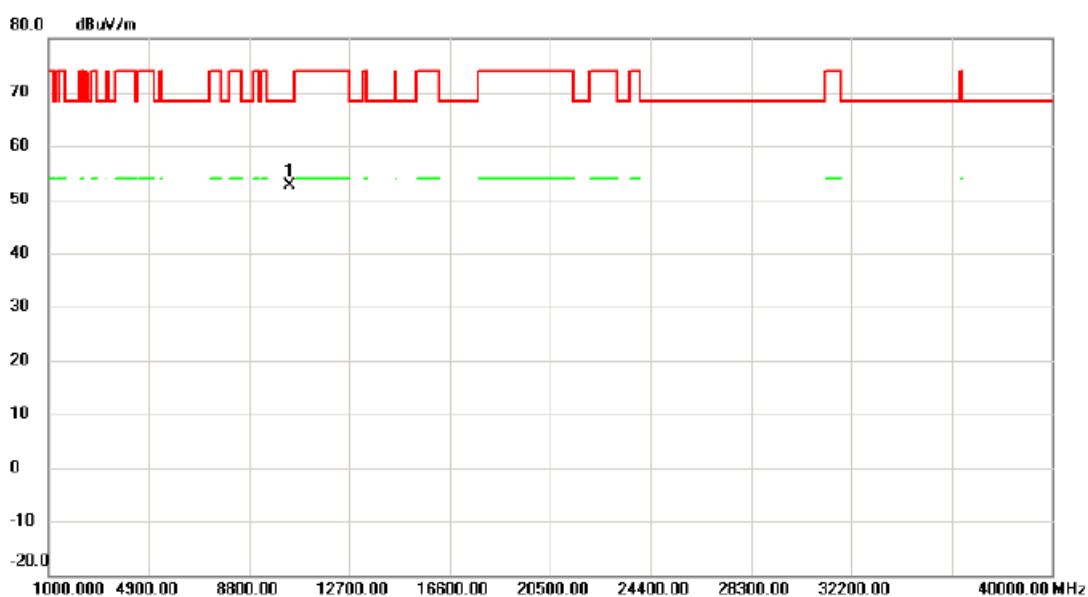


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10379.385	38.37	14.19	52.56	68.30	-15.74	peak	

測試頻道: IEEE 802.11ac (VHT40) /
5230 MHz
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢測器: Peak/AV
環境溫度: 24 °C

測試模式: 發射
視頻頻寬: 1000 kHz / 10 Hz
測試距離: 3 米
測試日期: 108/06/22
環境濕度: 52%

Orthogonal Axis: X

Polarization: Vertical

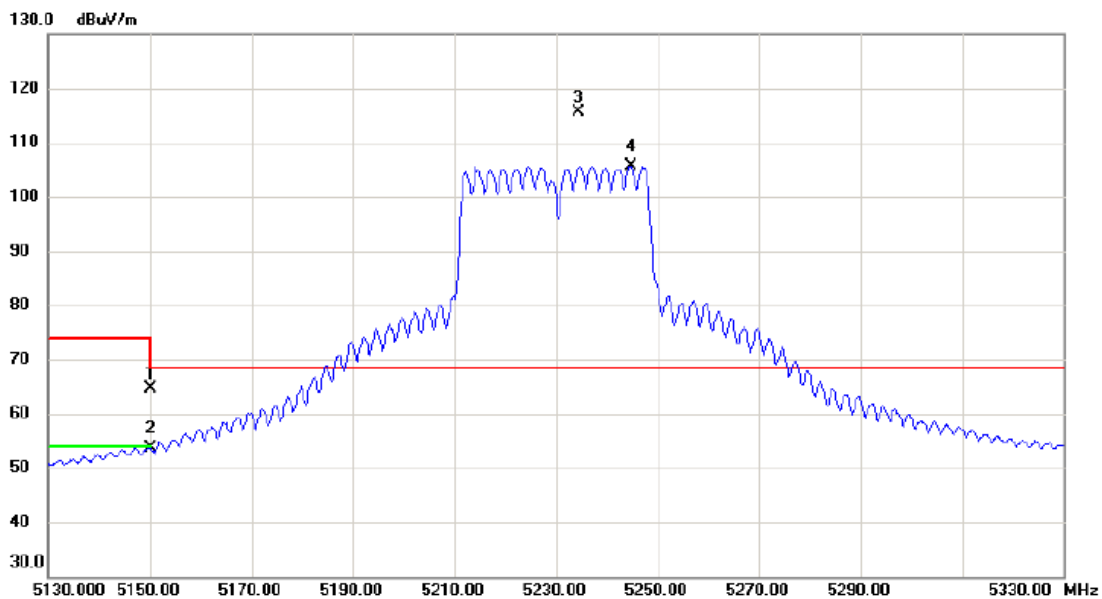

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5150.000	50.36	14.36	64.72	74.00	-9.28	peak	
2		5150.000	39.16	14.36	53.52	54.00	-0.48	AVG	
3	*	5234.300	101.14	14.51	115.65	68.30	47.35	peak	主波訊號不予判定
4	X	5244.700	91.15	14.53	105.68	68.30	37.38	AVG	主波訊號不予判定

測試頻道: IEEE 802.11ac (VHT40) /
5230 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢測器: Peak/AV


測試日期: 108/06/26

環境溫度: 24 °C

環境濕度: 52%

Orthogonal Axis: X

Polarization: Vertical

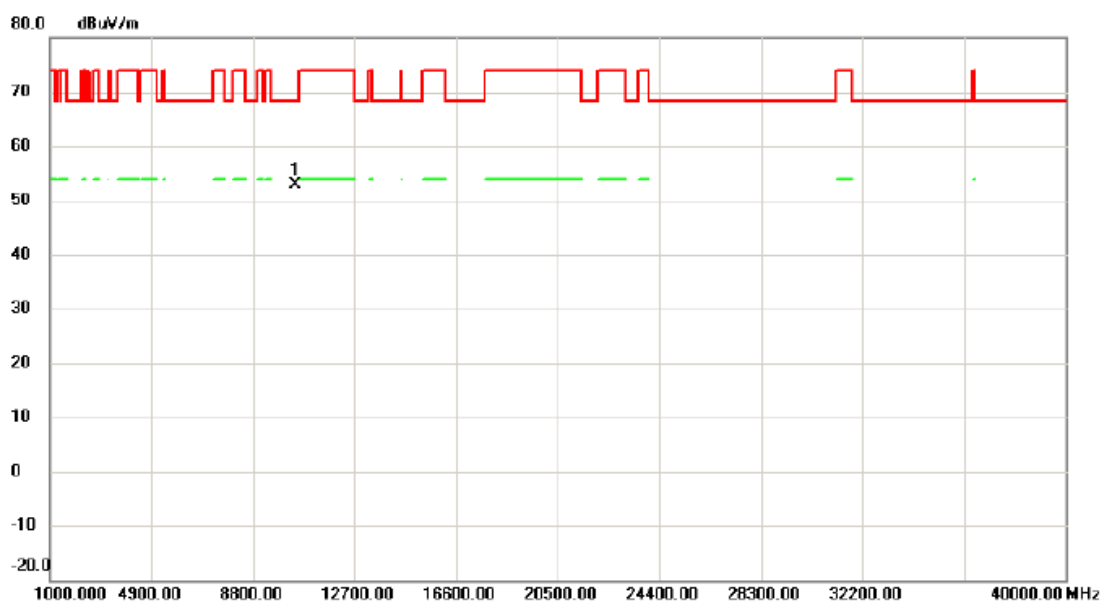


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10457.540	38.37	14.44	52.81	68.30	-15.49	peak	

測試頻道: IEEE 802.11ac (VHT40) /
5230 MHz
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢測器: Peak/AV
環境溫度: 24 °C

測試模式: 發射
視頻頻寬: 1000 kHz / 10 Hz
測試距離: 3 米
測試日期: 108/06/22
環境濕度: 52%

Orthogonal Axis: X

Polarization: Horizontal

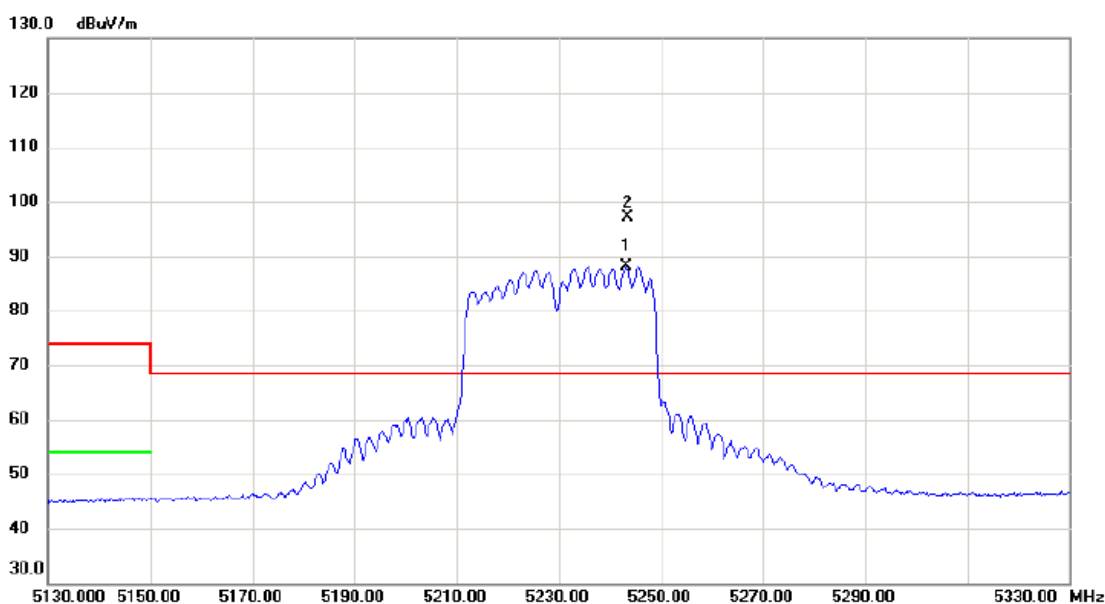

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	5243.200	73.59	14.52	88.11	68.30	19.81	AVG	主波訊號不予判定
2	*	5243.400	82.66	14.52	97.18	68.30	28.88	peak	主波訊號不予判定

測試頻道: IEEE 802.11ac (VHT40) /
5230 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢測器: Peak/AV


測試日期: 108/06/26

環境溫度: 24 °C

環境濕度: 52%

Orthogonal Axis: X

Polarization: Horizontal

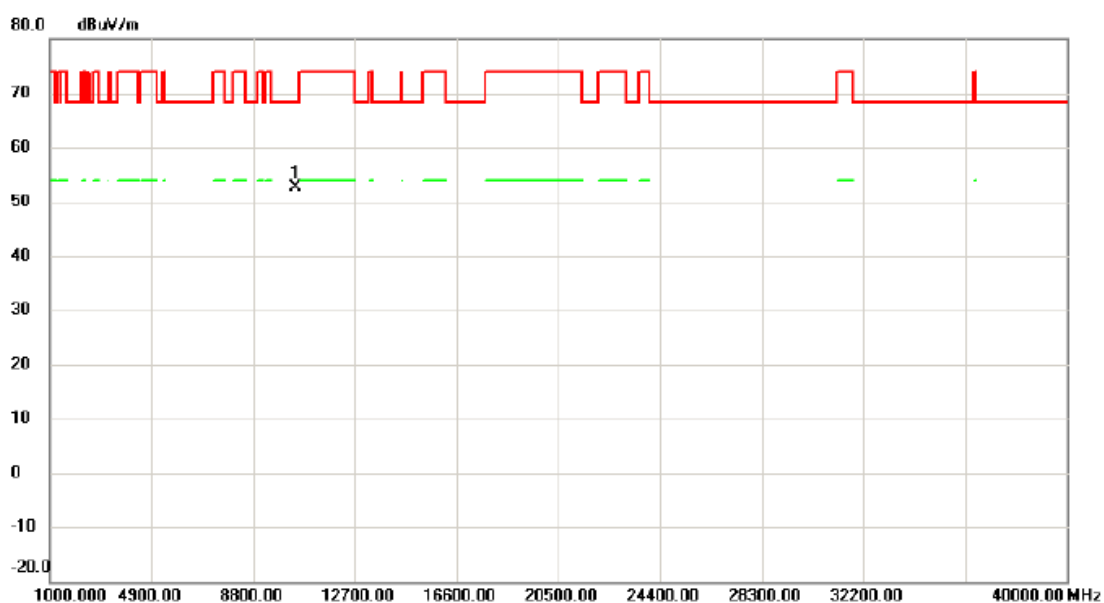


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	10458.735	38.07	14.46	52.53	68.30	-15.77	peak	

測試頻道: IEEE 802.11ac (VHT80) /
5210 MHz
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢測器: Peak/AV
環境溫度: 24 °C

測試模式: 發射
視頻頻寬: 1000 kHz / 10 Hz
測試距離: 3 米
測試日期: 108/06/22
環境濕度: 52%

Orthogonal Axis: X

Polarization: Vertical

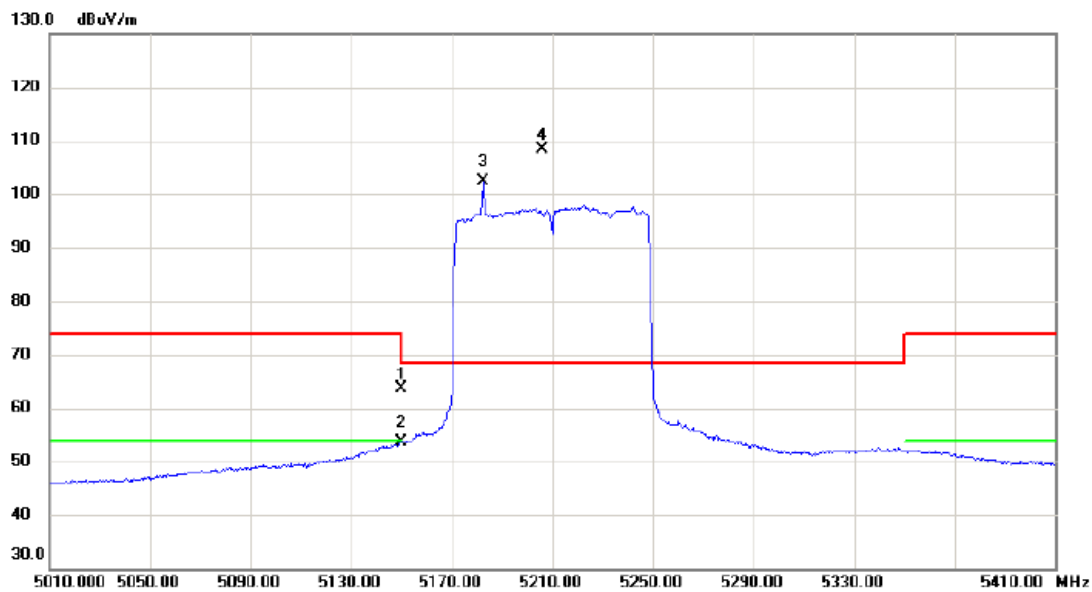

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5150.000	49.33	14.36	63.69	74.00	-10.31	peak	
2		5150.000	39.19	14.36	53.55	54.00	-0.45	AVG	
3	X	5182.400	87.91	14.42	102.33	68.30	34.03	AVG	主波訊號不予判定
4	*	5206.200	93.99	14.45	108.44	68.30	40.14	peak	主波訊號不予判定

測試頻道: IEEE 802.11ac (VHT80) /
5210 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢測器: Peak/AV


測試日期: 108/06/26

環境溫度: 24 °C

環境濕度: 52%

Orthogonal Axis: X

Polarization: Vertical

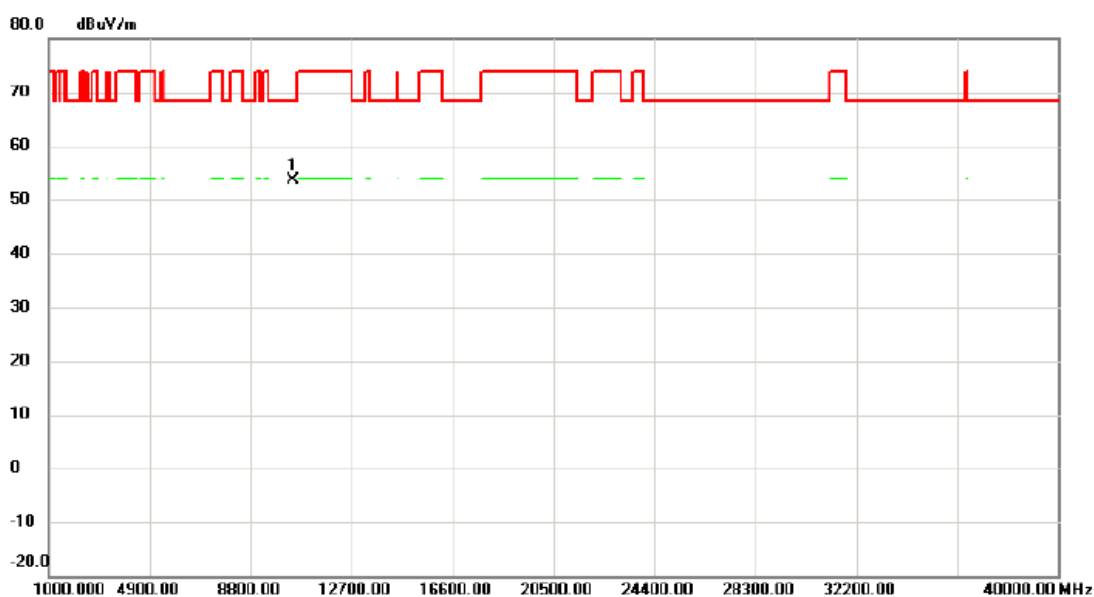


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	10420.245	39.24	14.33	53.57	68.30	-14.73	peak	

測試頻道: IEEE 802.11ac (VHT80) /
5210 MHz
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢測器: Peak/AV
環境溫度: 24 °C

測試模式: 發射
視頻頻寬: 1000 kHz / 10 Hz
測試距離: 3 米
測試日期: 108/06/26
環境濕度: 52%

Orthogonal Axis: X

Polarization: Horizontal

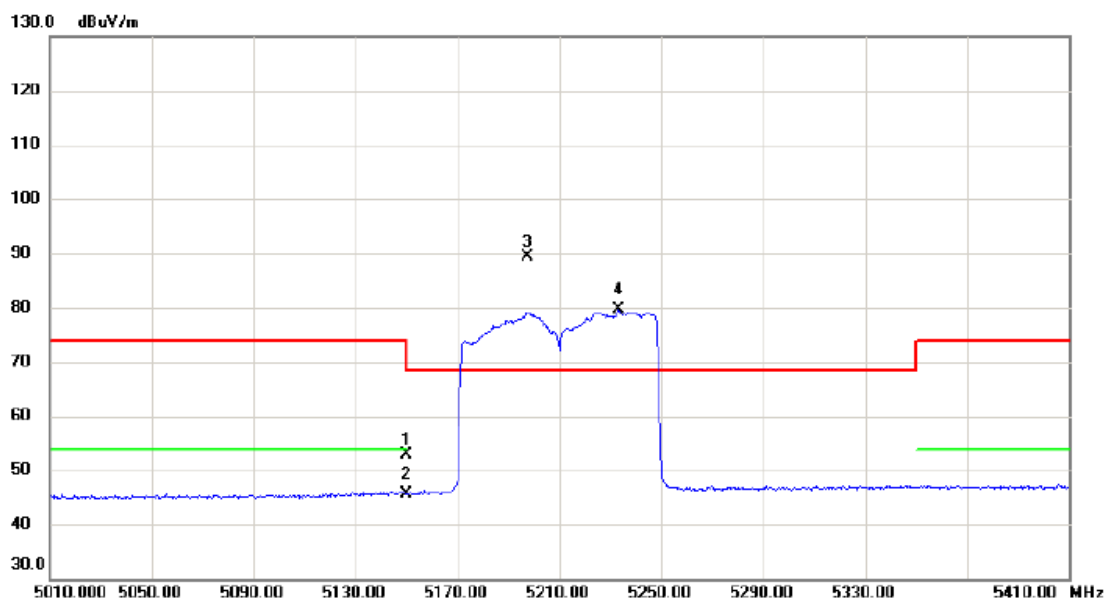

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5150.000	38.60	14.36	52.96	74.00	-21.04	peak	
2		5150.000	31.23	14.36	45.59	54.00	-8.41	AVG	
3	*	5197.600	74.83	14.45	89.28	68.30	20.98	peak	主波訊號不予判定
4	X	5233.400	65.07	14.51	79.58	68.30	11.28	AVG	主波訊號不予判定

測試頻道: IEEE 802.11ac (VHT80) /
5210 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢測器: Peak/AV


測試日期: 108/06/26

環境溫度: 24 °C

環境濕度: 52%

Orthogonal Axis: X

Polarization: Horizontal

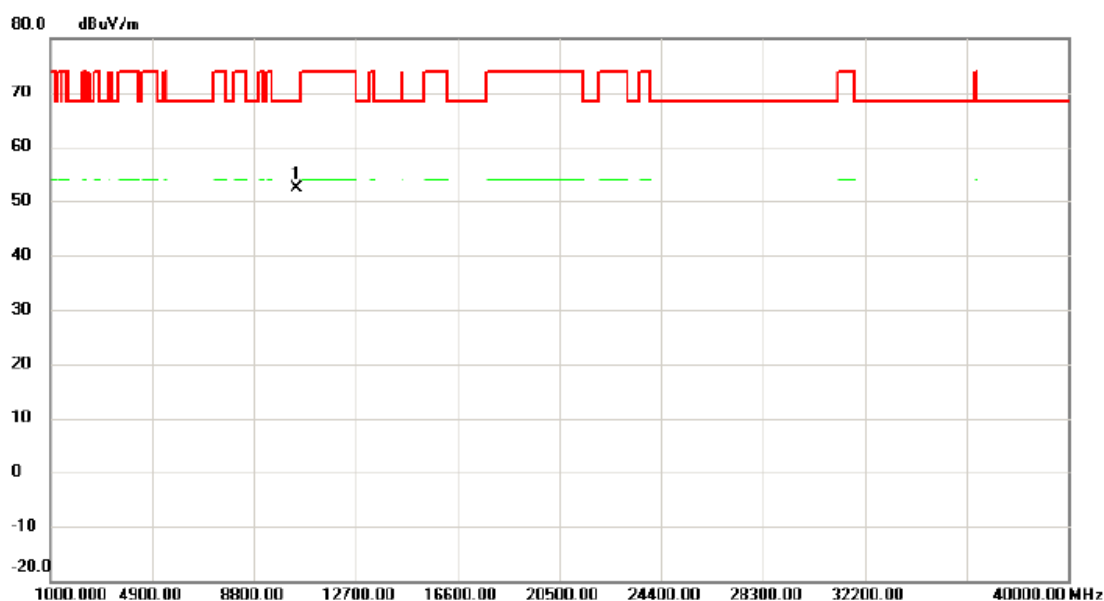

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	10418.155	38.00	14.31	52.31	68.30	-15.99	peak	

測試頻道: IEEE 802.11ac (VHT20) /
5745 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢測器: Peak/AV


測試日期: 108/06/22

環境溫度: 24 °C

環境濕度: 52%

Orthogonal Axis: X

Polarization: Vertical

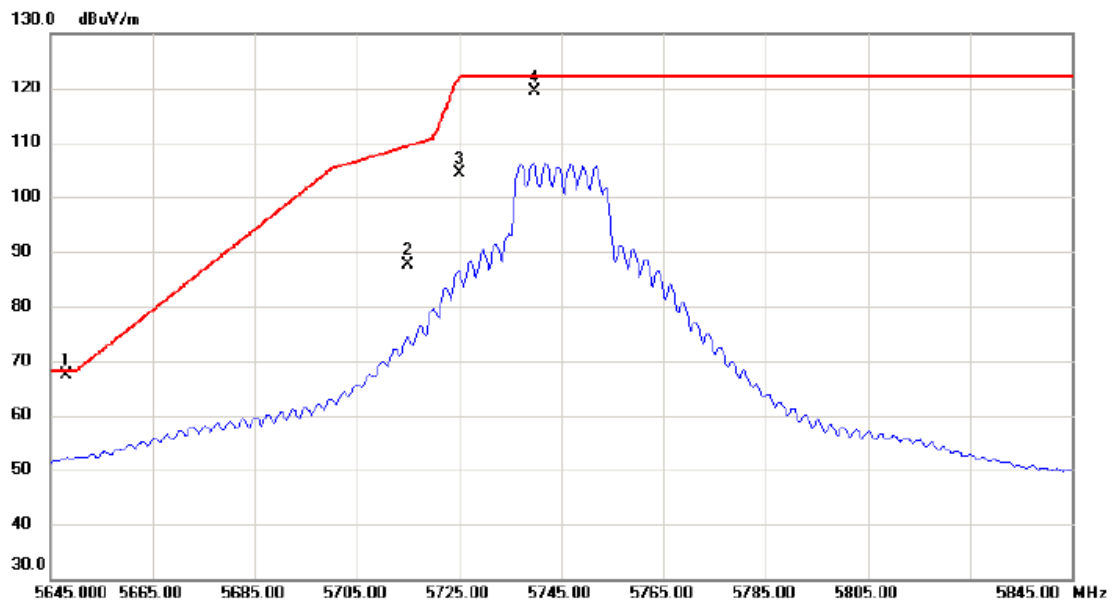

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	5648.100	52.10	15.17	67.27	68.20	-0.93	peak	
2		5715.000	72.47	15.26	87.73	109.40	-21.67	peak	
3		5725.000	89.00	15.27	104.27	122.20	-17.93	peak	
4		5739.700	104.00	15.29	119.29	122.20	-2.91	peak	主波訊號不予判定

測試頻道: IEEE 802.11ac (VHT20) /
5745 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢測器: Peak/AV


測試日期: 108/06/26

環境溫度: 24 °C

環境濕度: 52%

Orthogonal Axis: X

Polarization: Vertical

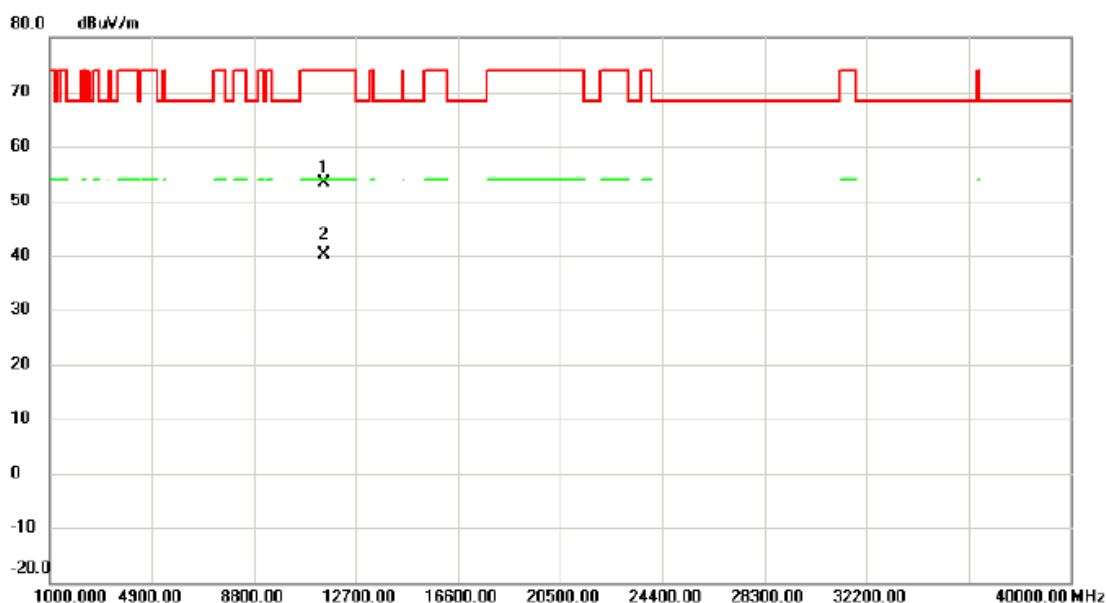

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11487.765	36.62	16.73	53.35	74.00	-20.65	peak	
2 *		11488.015	23.47	16.73	40.20	54.00	-13.80	AVG	

測試頻道: IEEE 802.11ac (VHT20) /
5745 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢測器: Peak/AV


測試日期: 108/06/22

環境溫度: 24 °C

環境濕度: 52%

Orthogonal Axis: X

Polarization: Horizontal

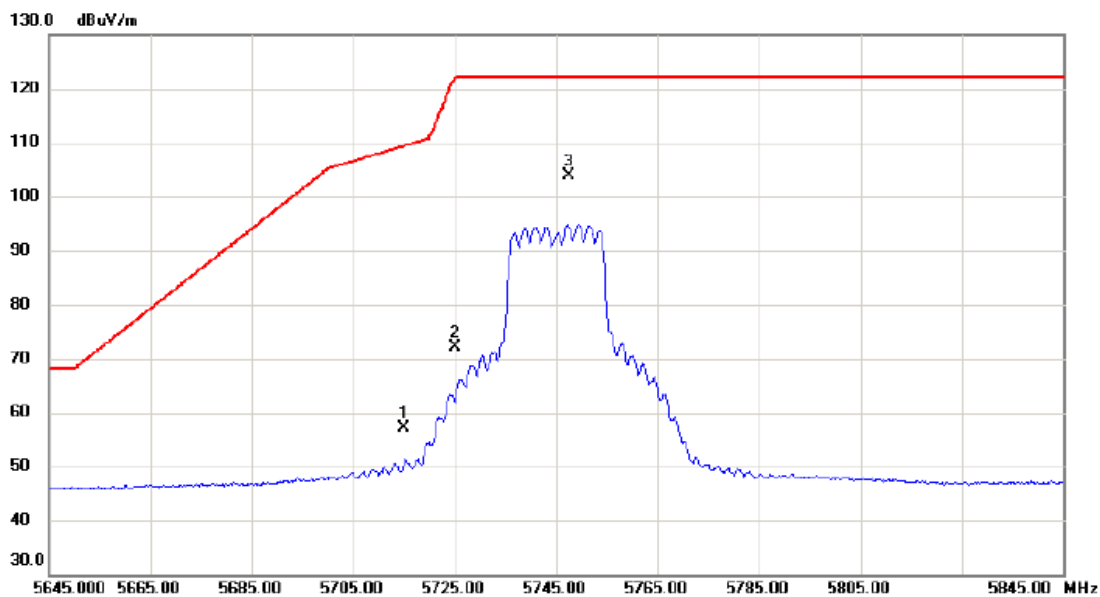

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5715.000	41.83	15.26	57.09	109.40	-52.31	peak	
2		5725.000	56.80	15.27	72.07	122.20	-50.13	peak	
3 *		5747.600	88.54	15.30	103.84	122.20	-18.36	peak	主波訊號不予判定

測試頻道: IEEE 802.11ac (VHT20) /
5745 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢測器: Peak/AV


測試日期: 108/06/26

環境溫度: 24 °C

環境濕度: 52%

Orthogonal Axis: X

Polarization: Horizontal

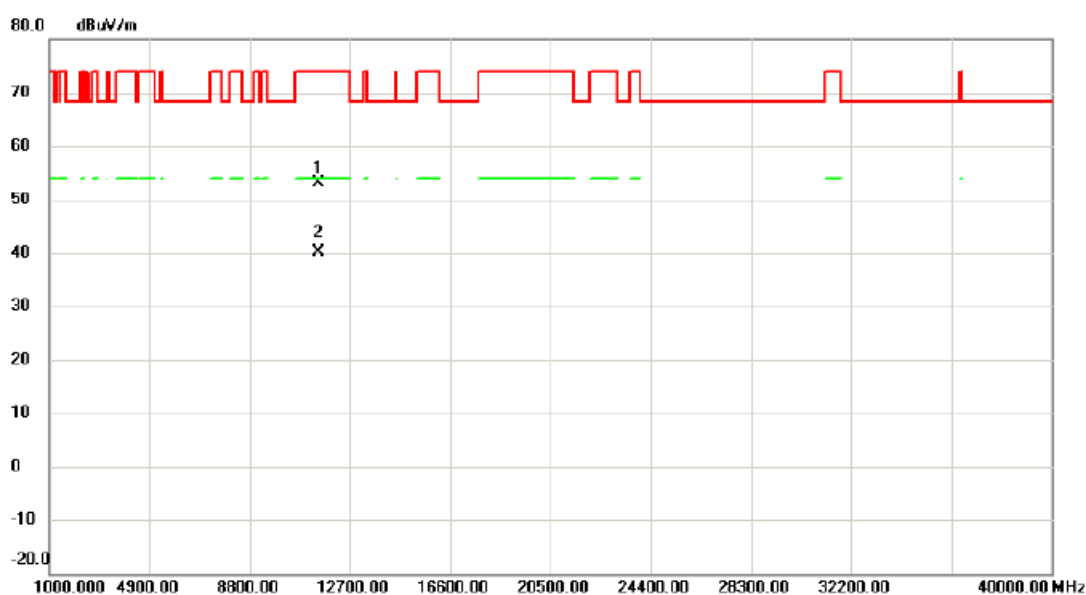


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11488.400	36.30	16.73	53.03	74.00	-20.97	peak	
2	*	11491.915	23.46	16.75	40.21	54.00	-13.79	AVG	

測試頻道: IEEE 802.11ac (VHT20) /
5785 MHz
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢測器: Peak/AV
環境溫度: 24 °C

測試模式: 發射
視頻頻寬: 1000 kHz / 10 Hz
測試距離: 3 米
測試日期: 108/06/22
環境濕度: 52%

Orthogonal Axis: X

Polarization: Vertical

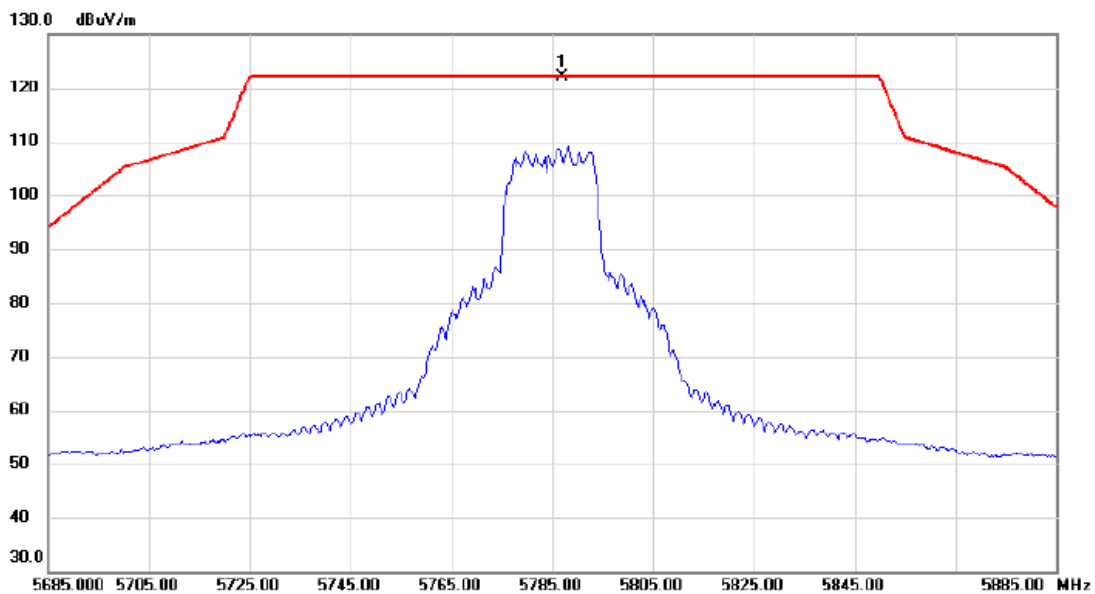

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	5787.100	106.80	15.35	122.15	122.20	-0.05	peak	主波訊號不予判定

測試頻道: IEEE 802.11ac (VHT20) /
5785 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢測器: Peak/AV


測試日期: 108/06/26

環境溫度: 24 °C

環境濕度: 52%

Orthogonal Axis: X

Polarization: Vertical

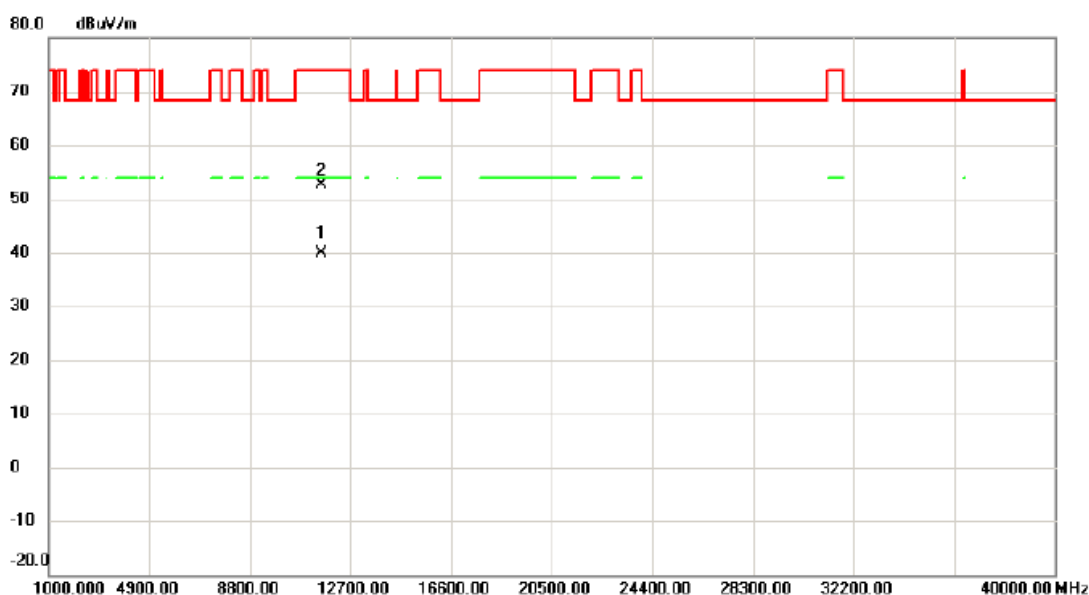

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	11569.455	23.41	16.55	39.96	54.00	-14.04	AVG	
2		11572.110	36.17	16.54	52.71	74.00	-21.29	peak	

測試頻道: IEEE 802.11ac (VHT20) /
5785 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢測器: Peak/AV


測試日期: 108/06/22

環境溫度: 24 °C

環境濕度: 52%

Orthogonal Axis: X

Polarization: Horizontal

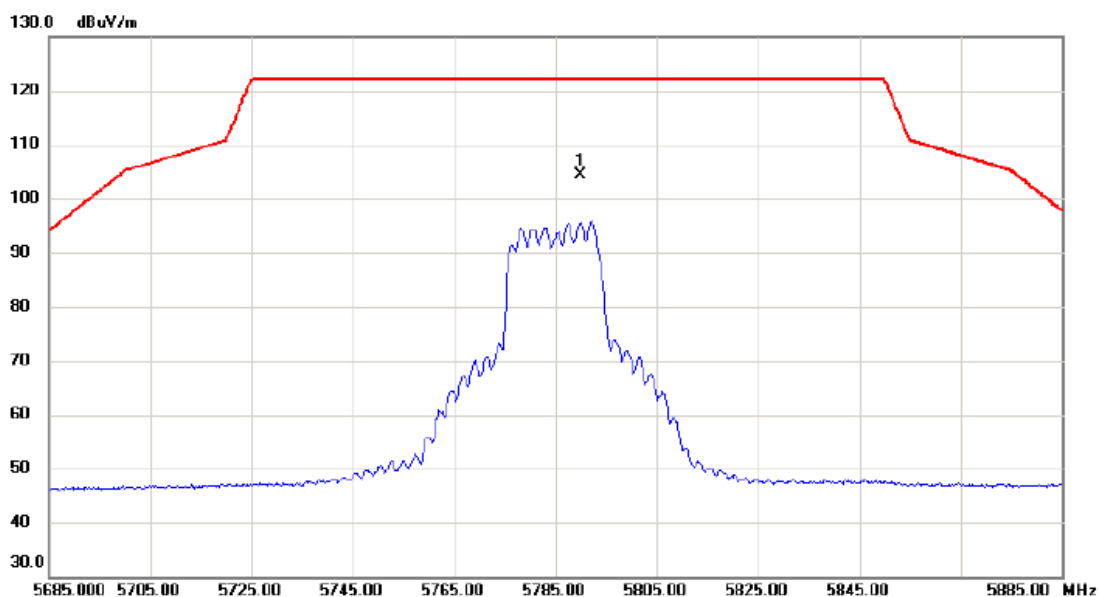


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	5789.900	89.13	15.35	104.48	122.20	-17.72	peak	主波訊號不予判定

測試頻道: IEEE 802.11ac (VHT20) /
5785 MHz
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢測器: Peak/AV
環境溫度: 24 °C

測試模式: 發射
視頻頻寬: 1000 kHz / 10 Hz
測試距離: 3 米
測試日期: 108/06/26
環境濕度: 52%

Orthogonal Axis: X

Polarization: Horizontal

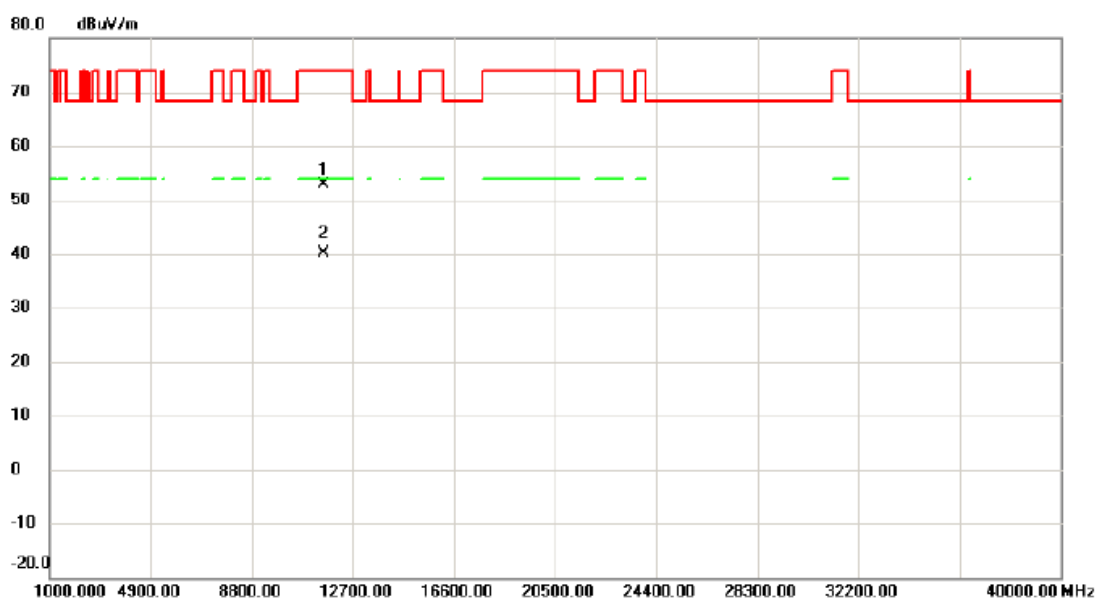


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11571.140	36.35	16.55	52.90	74.00	-21.10	peak	
2	*	11571.255	23.56	16.54	40.10	54.00	-13.90	AVG	

測試頻道: IEEE 802.11ac (VHT20) /
5825 MHz
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢測器: Peak/AV
環境溫度: 24 °C

測試模式: 發射
視頻頻寬: 1000 kHz / 10 Hz
測試距離: 3 米
測試日期: 108/06/22
環境濕度: 52%

Orthogonal Axis: X

Polarization: Vertical

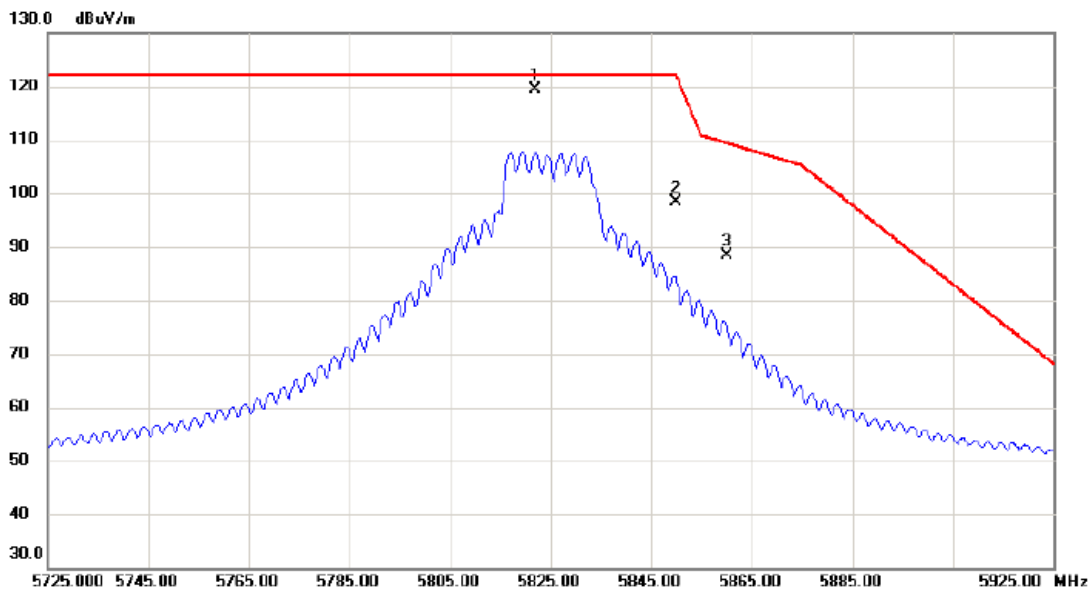

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	5822.000	104.05	15.39	119.44	122.20	-2.76	peak	主波訊號不予判定
2		5850.000	82.94	15.43	98.37	122.20	-23.83	peak	
3		5860.000	73.00	15.44	88.44	109.40	-20.96	peak	

測試頻道: IEEE 802.11ac (VHT20) /
5825 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢測器: Peak/AV


測試日期: 108/06/26

環境溫度: 24 °C

環境濕度: 52%

Orthogonal Axis: X

Polarization: Vertical

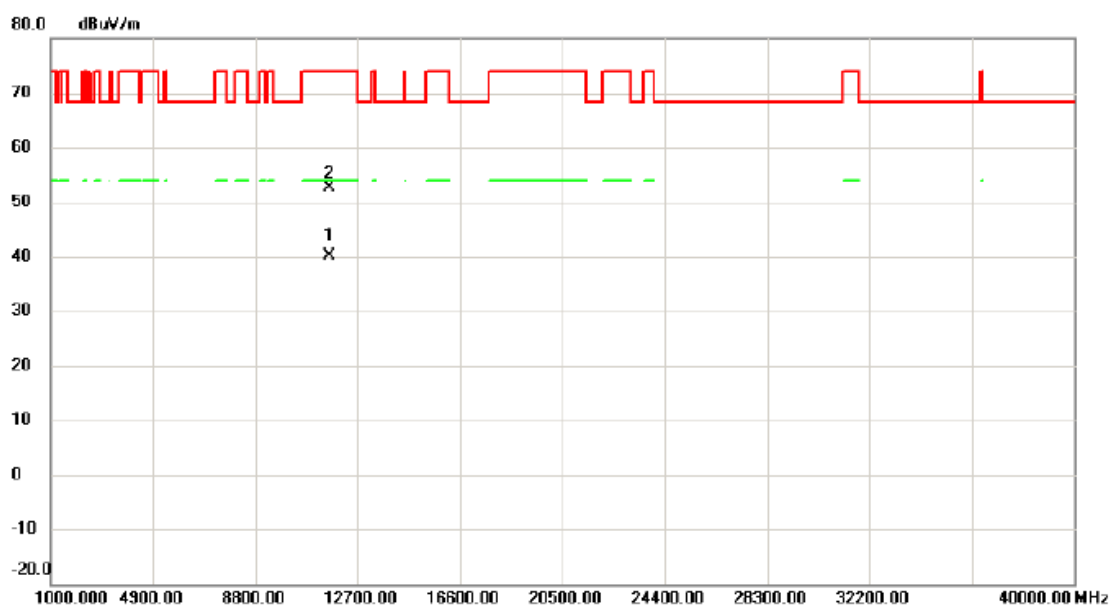


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	11647.710	23.80	16.33	40.13	54.00	-13.87	AVG	
2		11651.110	36.41	16.32	52.73	74.00	-21.27	peak	

測試頻道: IEEE 802.11ac (VHT20) /
5825 MHz
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢測器: Peak/AV
環境溫度: 24 °C

測試模式: 發射
視頻頻寬: 1000 kHz / 10 Hz
測試距離: 3 米
測試日期: 108/06/22
環境濕度: 52%

Orthogonal Axis: X

Polarization: Horizontal

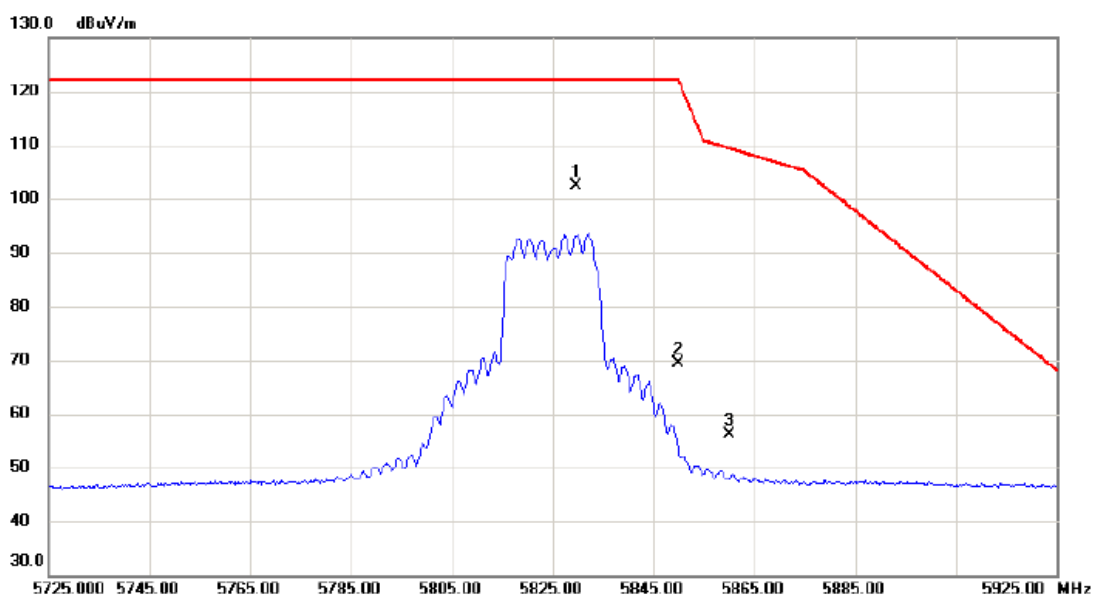

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	5829.700	86.95	15.41	102.36	122.20	-19.84	peak	主波訊號不予判定
2		5850.000	54.07	15.43	69.50	122.20	-52.70	peak	
3		5860.000	40.61	15.44	56.05	109.40	-53.35	peak	

測試頻道: IEEE 802.11ac (VHT20) /
5825 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢測器: Peak/AV


測試日期: 108/06/26

環境溫度: 24 °C

環境濕度: 52%

Orthogonal Axis: X

Polarization: Horizontal

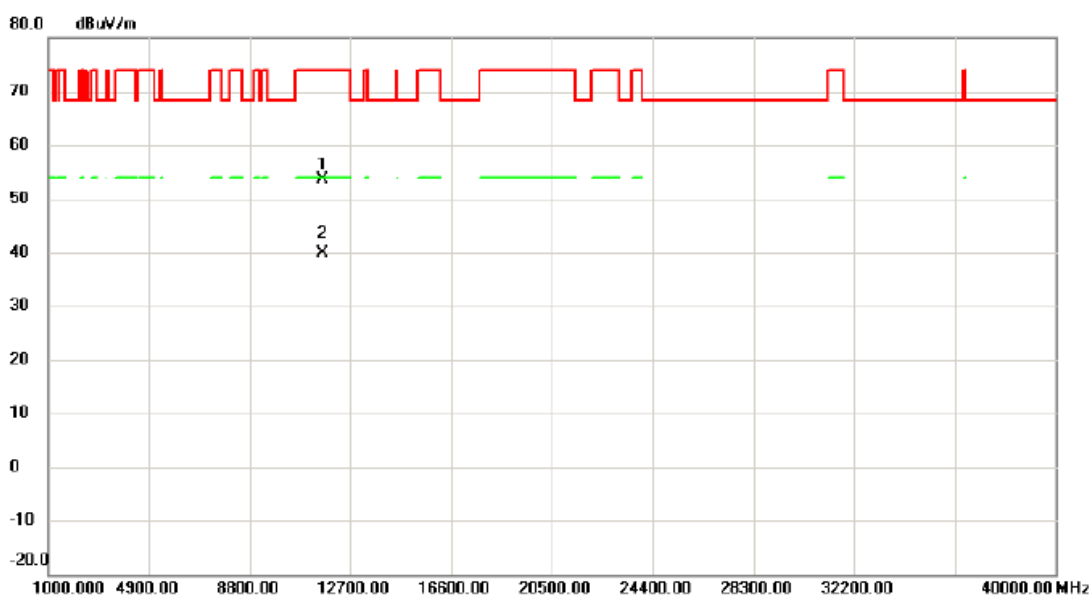


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11648.805	37.31	16.32	53.63	74.00	-20.37	peak	
2	*	11650.150	23.67	16.32	39.99	54.00	-14.01	AVG	

測試頻道: IEEE 802.11ac (VHT40) /
5755 MHz
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢測器: Peak/AV
環境溫度: 24 °C

測試模式: 發射
視頻頻寬: 1000 kHz / 10 Hz
測試距離: 3 米
測試日期: 108/06/22
環境濕度: 52%

Orthogonal Axis: X

Polarization: Vertical

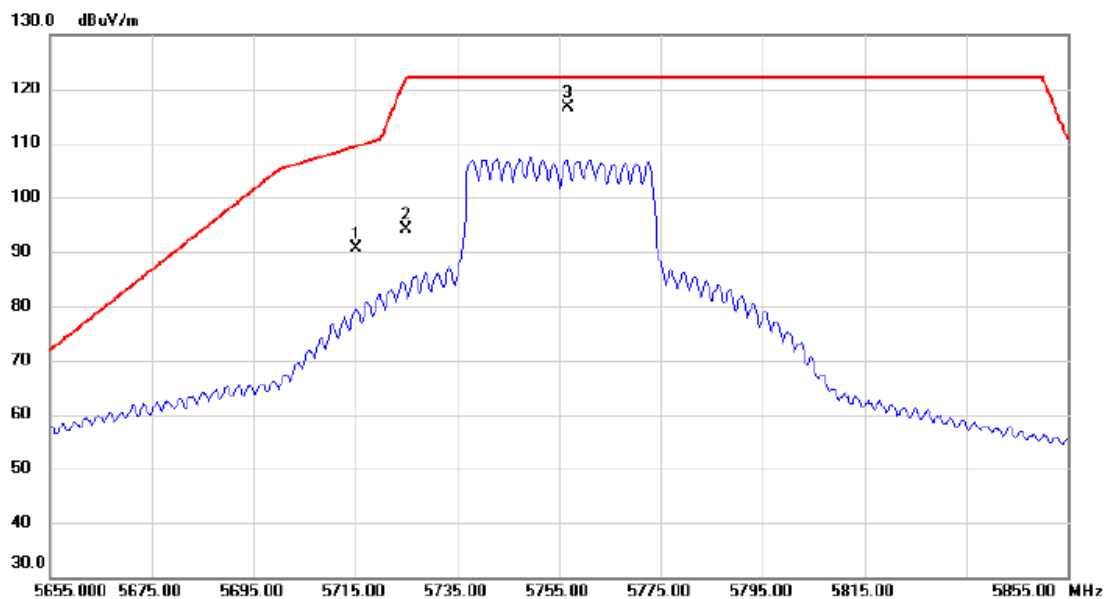


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5715.000	75.36	15.26	90.62	109.40	-18.78	peak	
2		5725.000	78.95	15.27	94.22	122.20	-27.98	peak	
3	*	5756.600	101.39	15.31	116.70	122.20	-5.50	peak	主波訊號不予判定

測試頻道: IEEE 802.11ac (VHT40) /
5755 MHz
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢測器: Peak/AV
環境溫度: 24 °C

測試模式: 發射
視頻頻寬: 1000 kHz / 10 Hz
測試距離: 3 米
測試日期: 108/06/26
環境濕度: 52%

Orthogonal Axis: X

Polarization: Vertical

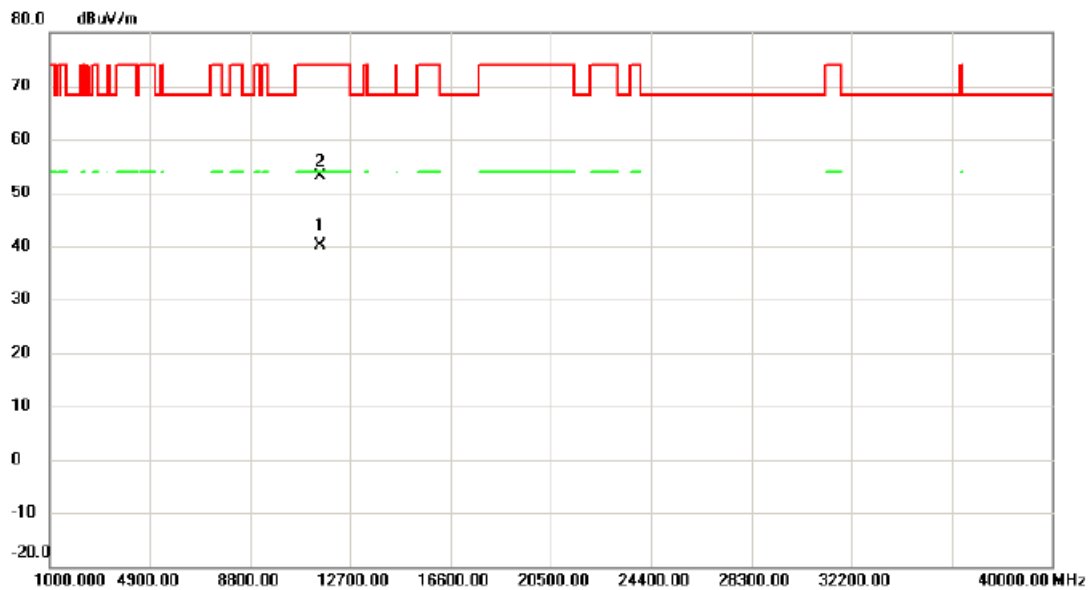


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	11509.025	23.35	16.73	40.08	54.00	-13.92	AVG	
2		11509.550	36.49	16.73	53.22	74.00	-20.78	peak	

測試頻道: IEEE 802.11ac (VHT40) /
5755 MHz
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢測器: Peak/AV
環境溫度: 24 °C

測試模式: 發射
視頻頻寬: 1000 kHz / 10 Hz
測試距離: 3 米
測試日期: 108/06/22
環境濕度: 52%

Orthogonal Axis: X

Polarization: Horizontal

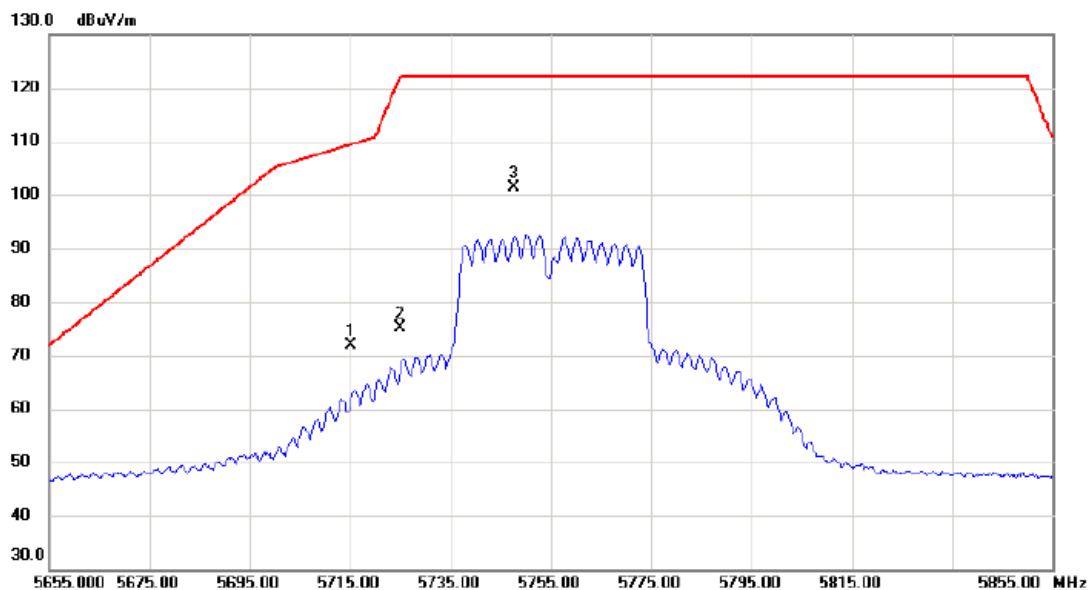

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5715.000	56.60	15.26	71.86	109.40	-37.54	peak	
2		5725.000	59.90	15.27	75.17	122.20	-47.03	peak	
3	*	5747.600	86.17	15.30	101.47	122.20	-20.73	peak	主波訊號不予判定

測試頻道: IEEE 802.11ac (VHT40) /
5755 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢測器: Peak/AV


測試日期: 108/06/26

環境溫度: 24 °C

環境濕度: 52%

Orthogonal Axis: X

Polarization: Horizontal

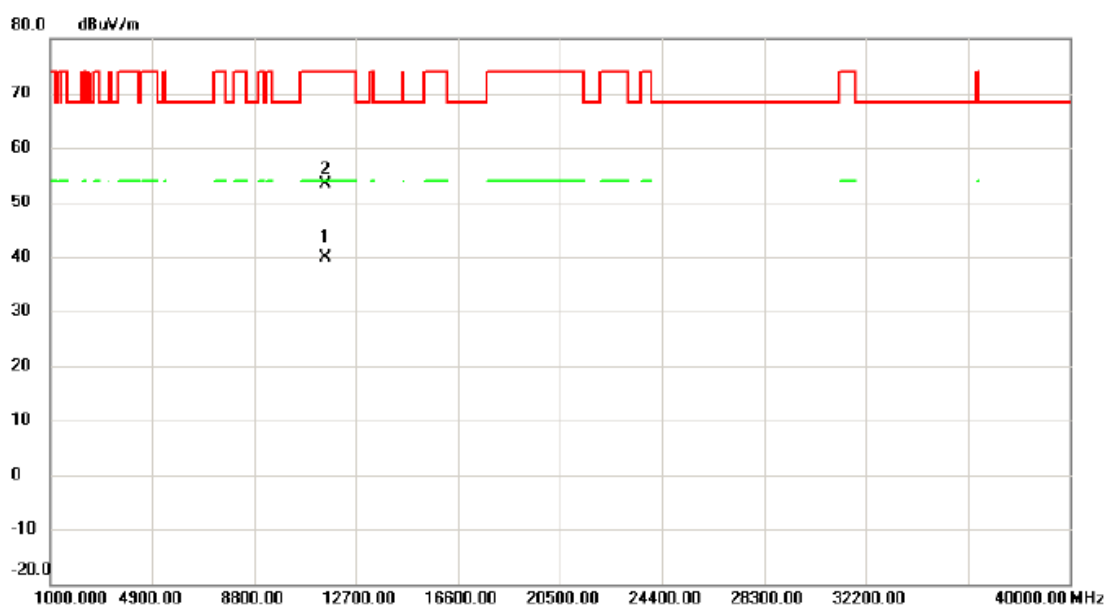


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	11508.075	23.27	16.73	40.00	54.00	-14.00	AVG	
2		11511.940	36.55	16.72	53.27	74.00	-20.73	peak	

測試頻道: IEEE 802.11ac (VHT40) /
5795 MHz
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢測器: Peak/AV
環境溫度: 24 °C

測試模式: 發射
視頻頻寬: 1000 kHz / 10 Hz
測試距離: 3 米
測試日期: 108/06/22
環境濕度: 52%

Orthogonal Axis: X

Polarization: Vertical

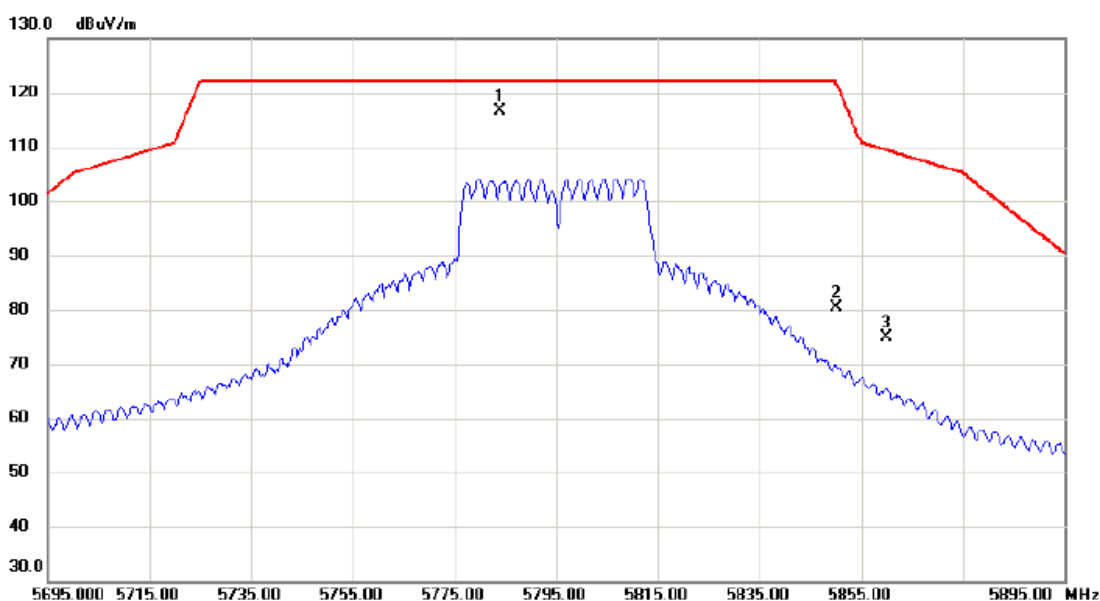

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	5784.000	101.23	15.34	116.57	122.20	-5.63	peak	主波訊號不予判定
2		5850.000	65.01	15.43	80.44	122.20	-41.76	peak	
3		5860.000	59.51	15.44	74.95	109.40	-34.45	peak	

測試頻道: IEEE 802.11ac (VHT40) /
5795 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢測器: Peak/AV


測試日期: 108/06/26

環境溫度: 24 °C

環境濕度: 52%

Orthogonal Axis: X

Polarization: Vertical

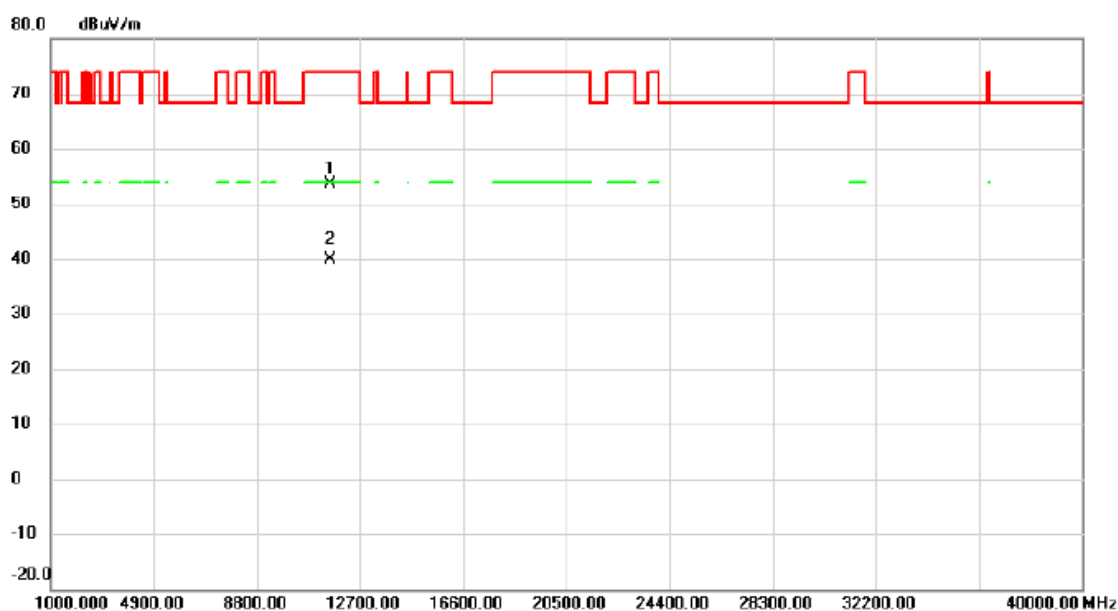

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11589.095	37.19	16.49	53.68	74.00	-20.32	peak	
2	*	11590.620	23.48	16.48	39.96	54.00	-14.04	AVG	

測試頻道: IEEE 802.11ac (VHT40) / 5795 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢測器: Peak/AV


測試日期: 108/06/22

環境溫度: 24 °C

環境濕度: 52%

Orthogonal Axis: X

Polarization: Horizontal

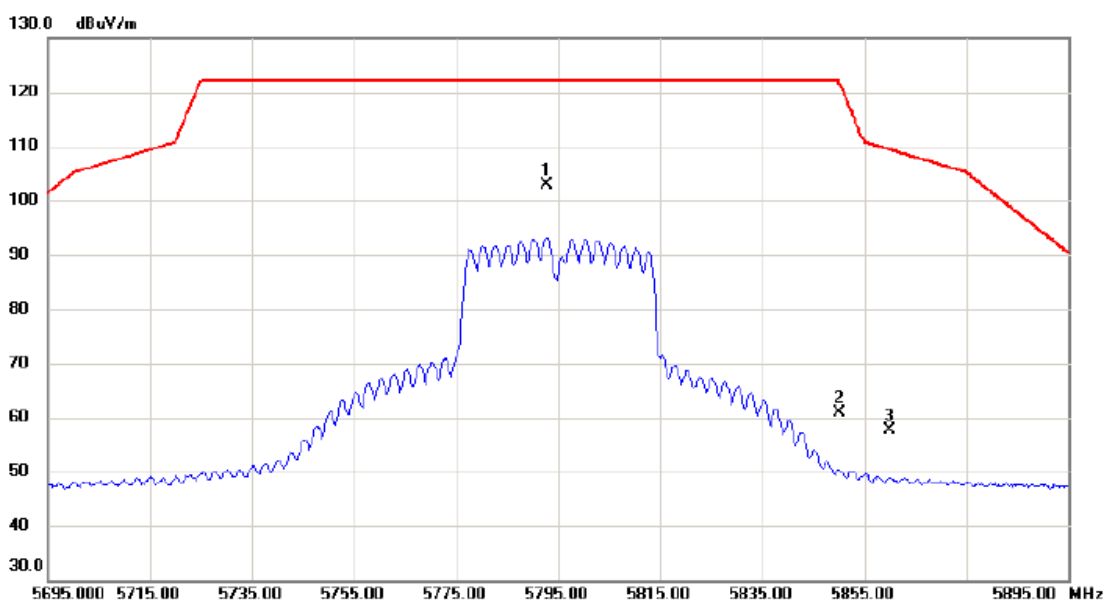


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	5792.600	87.63	15.35	102.98	122.20	-19.22	peak	主波訊號不予判定
2		5850.000	45.34	15.43	60.77	122.20	-61.43	peak	
3		5860.000	42.15	15.44	57.59	109.40	-51.81	peak	

測試頻道: IEEE 802.11ac (VHT40) /
5795 MHz
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢測器: Peak/AV
環境溫度: 24 °C

測試模式: 發射
視頻頻寬: 1000 kHz / 10 Hz
測試距離: 3 米
測試日期: 108/06/26
環境濕度: 52%

Orthogonal Axis: X

Polarization: Horizontal

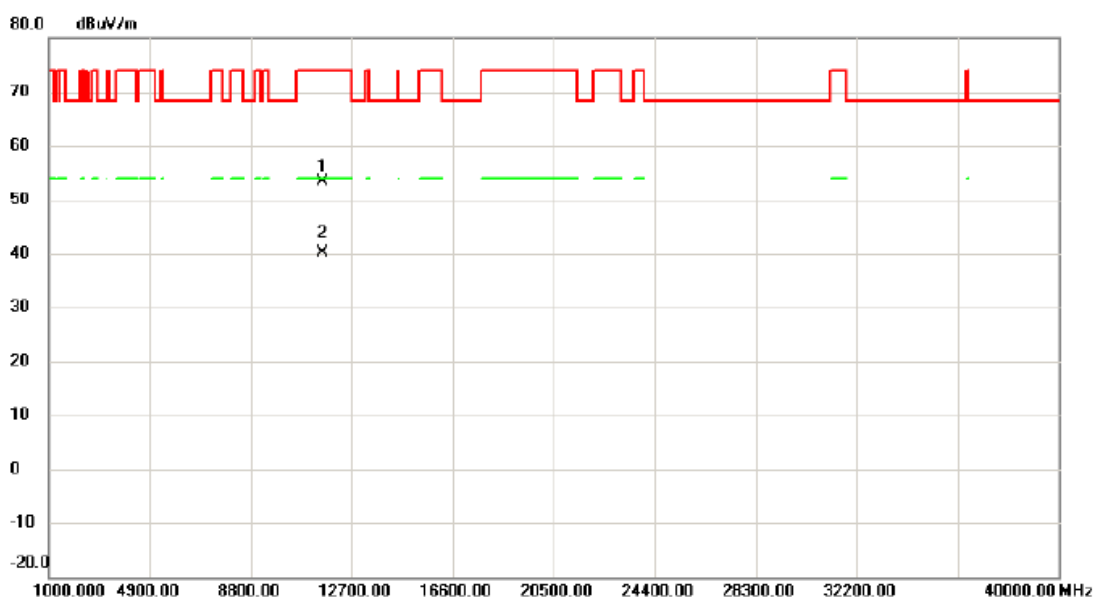

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11590.565	36.78	16.48	53.26	74.00	-20.74	peak	
2	*	11590.610	23.57	16.48	40.05	54.00	-13.95	AVG	

測試頻道: IEEE 802.11ac (VHT80) /
5775 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢測器: Peak/AV


測試日期: 108/06/21

環境溫度: 24 °C

環境濕度: 52%

Orthogonal Axis: X

Polarization: Vertical

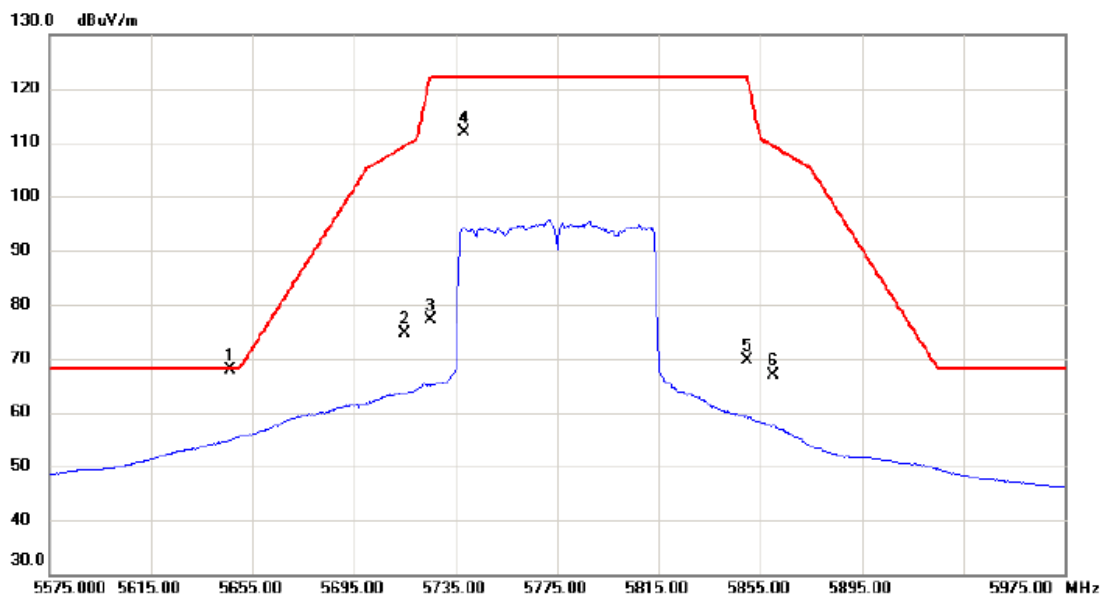

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *		5646.200	52.80	15.17	67.97	68.20	-0.23	peak	
2		5715.000	59.32	15.26	74.58	109.40	-34.82	peak	
3		5725.000	61.87	15.27	77.14	122.20	-45.06	peak	
4		5738.600	96.63	15.28	111.91	122.20	-10.29	peak	主波訊號不予判定
5		5850.000	54.17	15.43	69.60	122.20	-52.60	peak	
6		5860.000	51.43	15.44	66.87	109.40	-42.53	peak	

測試頻道: IEEE 802.11ac (VHT80) /
5775 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢測器: Peak/AV


測試日期: 108/06/22

環境溫度: 24 °C

環境濕度: 52%

Orthogonal Axis: X

Polarization: Vertical

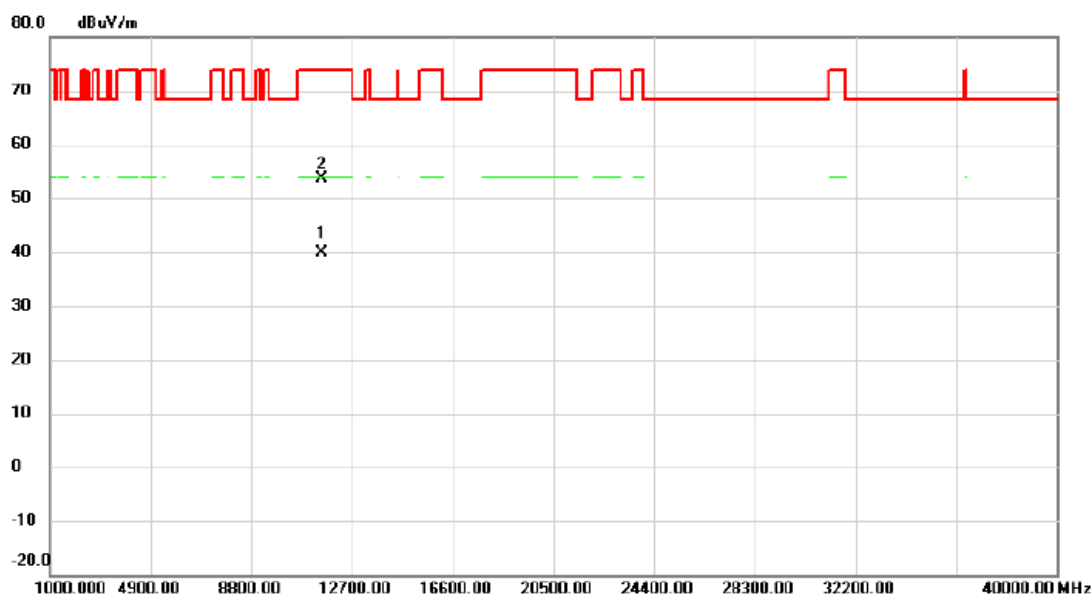


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	11551.550	23.34	16.61	39.95	54.00	-14.05	AVG	
2		11551.750	37.08	16.61	53.69	74.00	-20.31	peak	

測試頻道: IEEE 802.11ac (VHT80) /
5775 MHz
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢測器: Peak/AV
環境溫度: 24 °C

測試模式: 發射
視頻頻寬: 1000 kHz / 10 Hz
測試距離: 3 米
測試日期: 108/06/21
環境濕度: 52%

Orthogonal Axis: X

Polarization: Horizontal

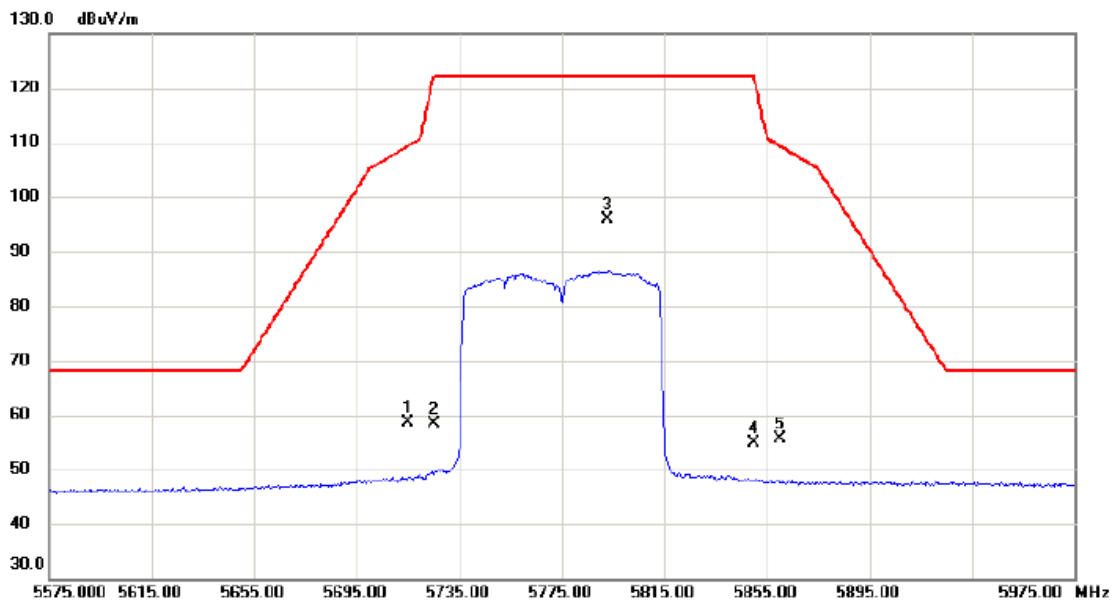


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5715.000	43.36	15.26	58.62	109.40	-50.78	peak	
2		5725.000	43.07	15.27	58.34	122.20	-63.86	peak	
3	*	5792.600	80.61	15.35	95.96	122.20	-26.24	peak	主波訊號不予判定
4		5850.000	39.34	15.43	54.77	122.20	-67.43	peak	
5		5860.000	40.09	15.44	55.53	109.40	-53.87	peak	

測試頻道: IEEE 802.11ac (VHT80) /
5775 MHz
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢測器: Peak/AV
環境溫度: 24 °C

測試模式: 發射
視頻頻寬: 1000 kHz / 10 Hz
測試距離: 3 米
測試日期: 108/06/22
環境濕度: 52%

Orthogonal Axis: X

Polarization: Horizontal

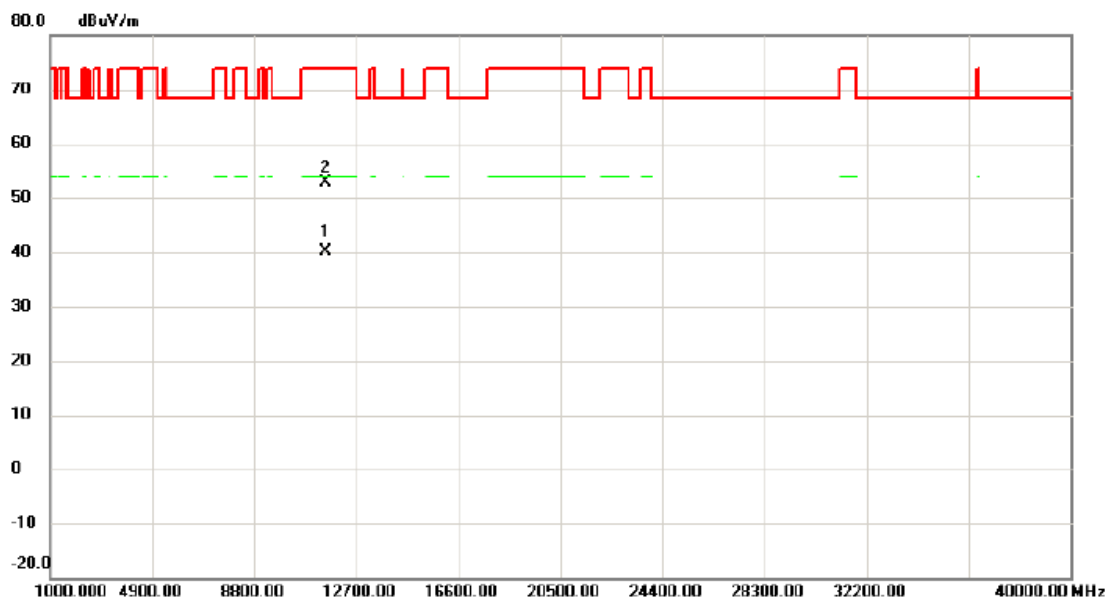


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	11548.030	23.49	16.62	40.11	54.00	-13.89	AVG	
2		11551.340	36.24	16.61	52.85	74.00	-21.15	peak	

測試頻道: IEEE 802.11ax (HE20) /
5180 MHz
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢測器: Peak/AV
環境溫度: 24 °C

測試模式: 發射
視頻頻寬: 1000 kHz / 10 Hz
測試距離: 3 米
測試日期: 108/06/22
環境濕度: 52%

Orthogonal Axis: X

Polarization: Vertical

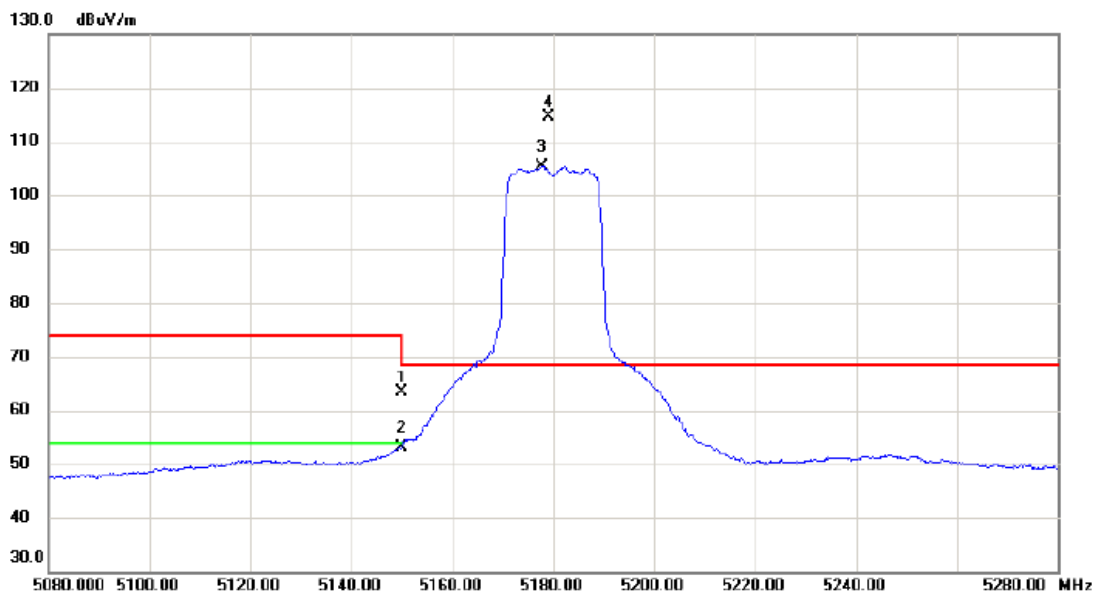

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5150.000	48.97	14.36	63.33	74.00	-10.67	peak	
2		5150.000	38.87	14.36	53.23	54.00	-0.77	AVG	
3	X	5177.800	91.01	14.41	105.42	68.30	37.12	AVG	主波訊號不予判定
4	*	5179.000	100.25	14.41	114.66	68.30	46.36	peak	主波訊號不予判定

測試頻道: IEEE 802.11ax (HE20) /
5180 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢測器: Peak/AV

環境溫度: 24 °C

測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz


測試距離: 3 米

測試日期: 108/06/26

環境濕度: 52%

Orthogonal Axis: X

Polarization: Vertical

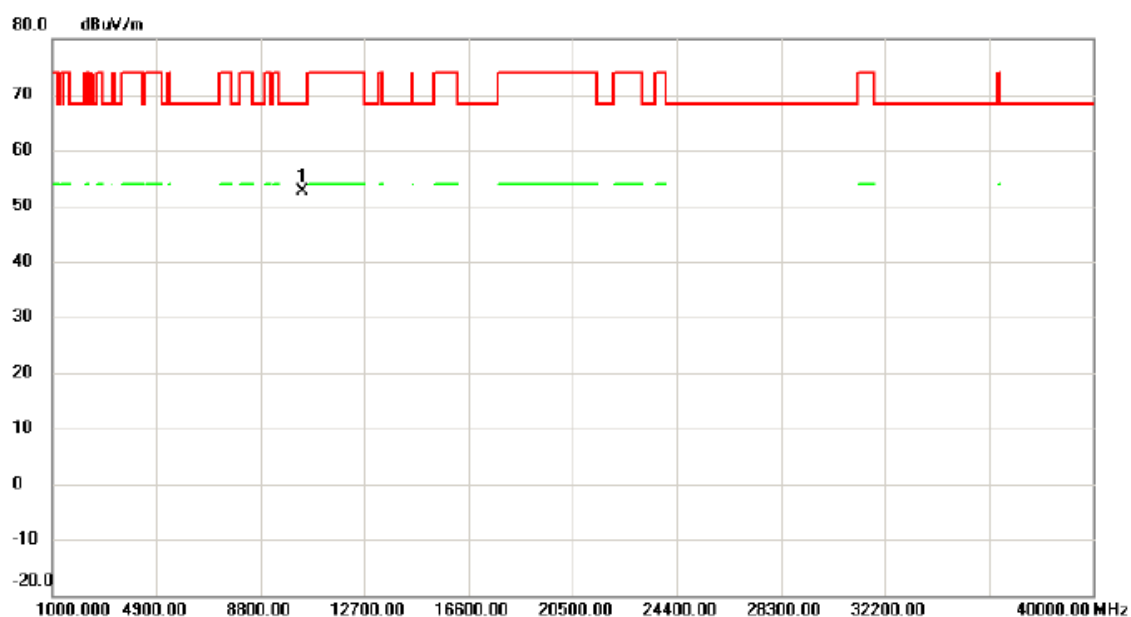


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10362.475	38.41	14.13	52.54	68.30	-15.76	peak	

測試頻道: IEEE 802.11ax (HE20) /
5180 MHz
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢測器: Peak/AV
環境溫度: 24 °C

測試模式: 發射
視頻頻寬: 1000 kHz / 10 Hz
測試距離: 3 米
測試日期: 108/06/22
環境濕度: 52%

Orthogonal Axis: X

Polarization: Horizontal

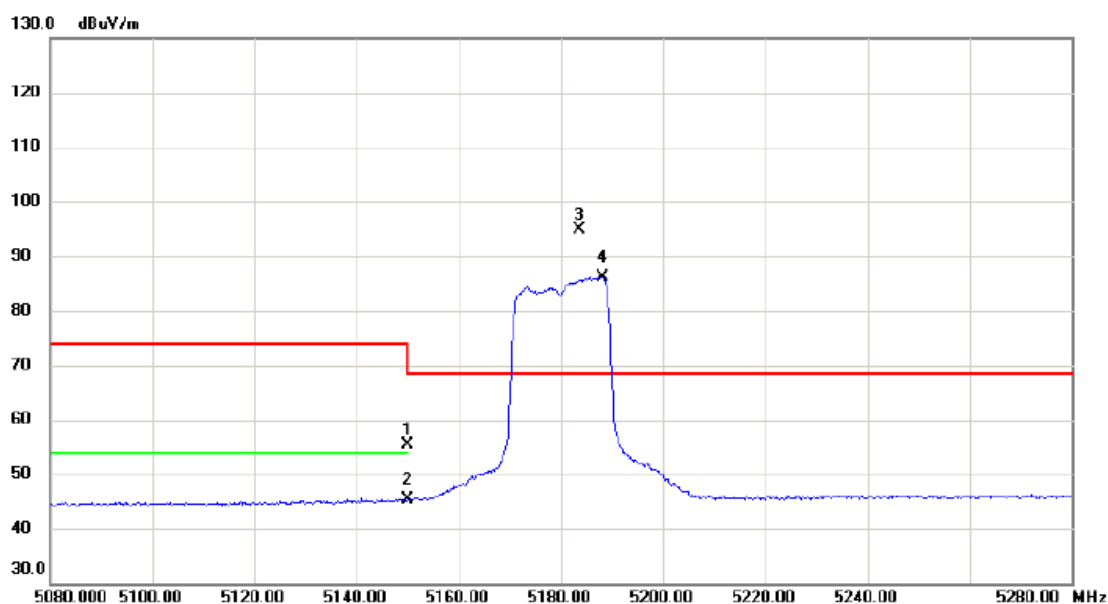

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5150.000	41.02	14.36	55.38	74.00	-18.62	peak	
2		5150.000	30.97	14.36	45.33	54.00	-8.67	AVG	
3	*	5183.600	80.35	14.42	94.77	68.30	26.47	peak	主波訊號不予判定
4	X	5188.000	71.71	14.42	86.13	68.30	17.83	AVG	主波訊號不予判定

測試頻道: IEEE 802.11ax (HE20) /
5180 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢測器: Peak/AV


測試日期: 108/06/26

環境溫度: 24 °C

環境濕度: 52%

Orthogonal Axis: X

Polarization: Horizontal

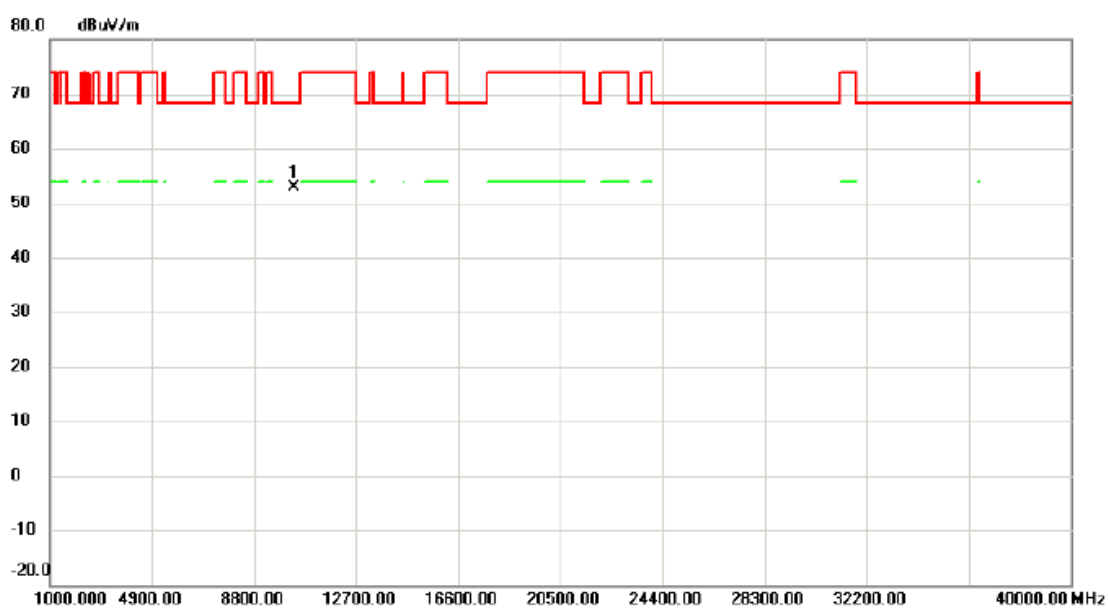

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	10359.445	38.87	14.13	53.00	68.30	-15.30	peak	

測試頻道: IEEE 802.11ax (HE20) /
5200 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢測器: Peak/AV


測試日期: 108/06/22

環境溫度: 24 °C

環境濕度: 52%

Orthogonal Axis: X

Polarization: Vertical

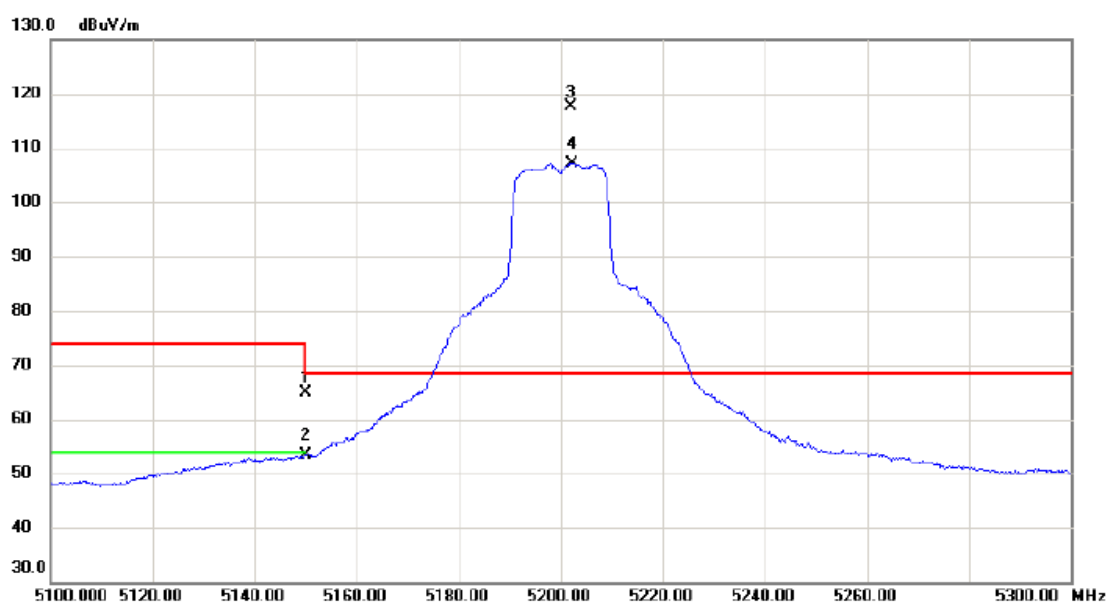


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5150.000	50.57	14.36	64.93	74.00	-9.07	peak	
2		5150.000	38.95	14.36	53.31	54.00	-0.69	AVG	
3	*	5201.900	103.11	14.45	117.56	68.30	49.26	peak	主波訊號不予判定
4	X	5202.400	92.79	14.45	107.24	68.30	38.94	AVG	主波訊號不予判定

測試頻道: IEEE 802.11ax (HE20) /
5200 MHz
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢測器: Peak/AV
環境溫度: 24 °C

測試模式: 發射
視頻頻寬: 1000 kHz / 10 Hz
測試距離: 3 米
測試日期: 108/06/26
環境濕度: 52%

Orthogonal Axis: X

Polarization: Vertical

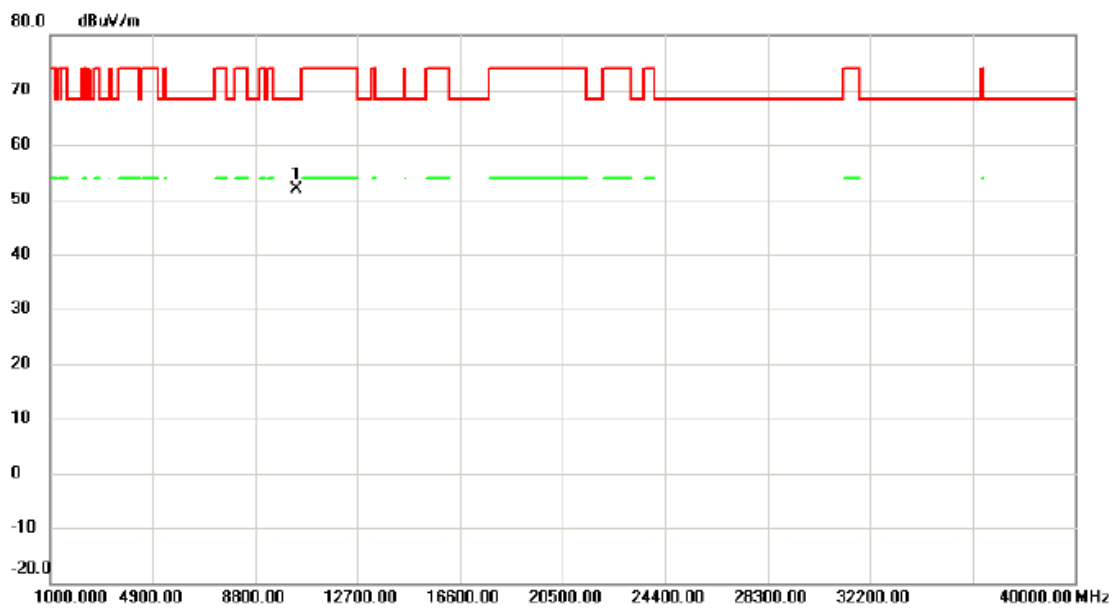

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10399.355	37.67	14.26	51.93	68.30	-16.37	peak	

測試頻道: IEEE 802.11ax (HE20) /
5200 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢測器: Peak/AV

環境溫度: 24 °C

測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz


測試距離: 3 米

測試日期: 108/06/22

環境濕度: 52%

Orthogonal Axis: X

Polarization: Horizontal

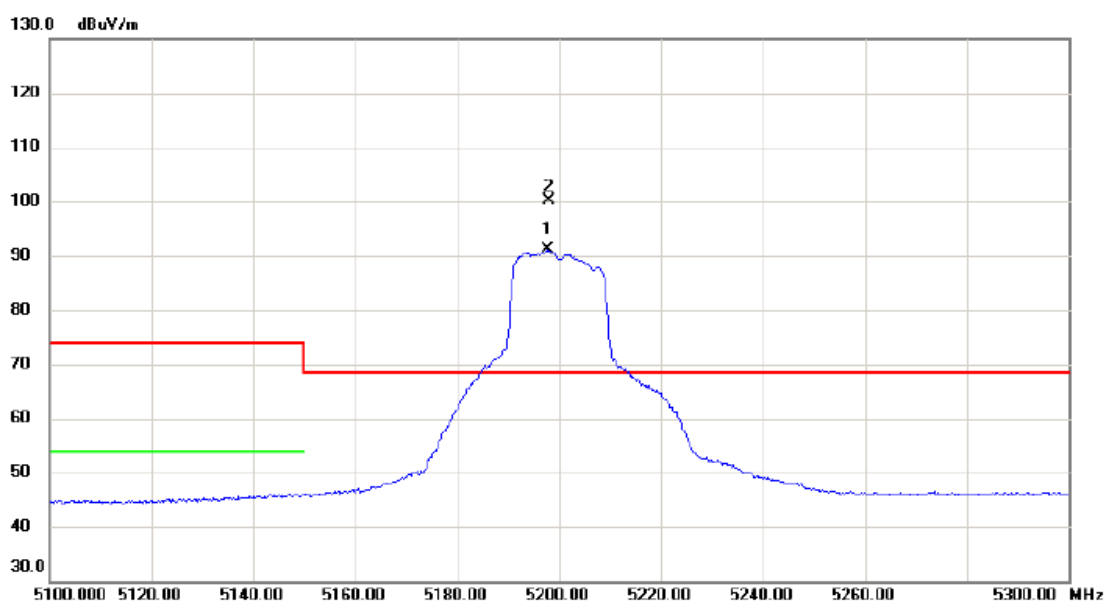

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	5197.700	76.68	14.45	91.13	68.30	22.83	AVG	主波訊號不予判定
2	*	5198.000	85.73	14.45	100.18	68.30	31.88	peak	主波訊號不予判定

測試頻道: IEEE 802.11ax (HE20) /
5200 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢測器: Peak/AV


測試日期: 108/06/26

環境溫度: 24 °C

環境濕度: 52%

Orthogonal Axis: X

Polarization: Horizontal

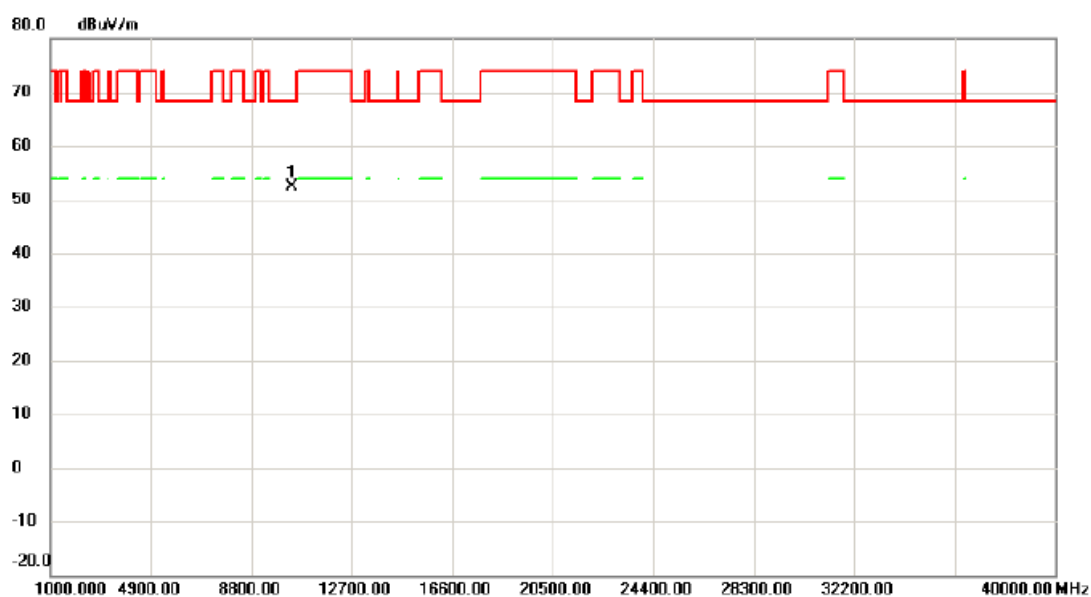

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	10401.835	38.15	14.26	52.41	68.30	-15.89	peak	

測試頻道: IEEE 802.11ax (HE20) /
5240 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢測器: Peak/AV

環境溫度: 24 °C

測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz


測試距離: 3 米

測試日期: 108/06/22

環境濕度: 52%

Orthogonal Axis: X

Polarization: Vertical

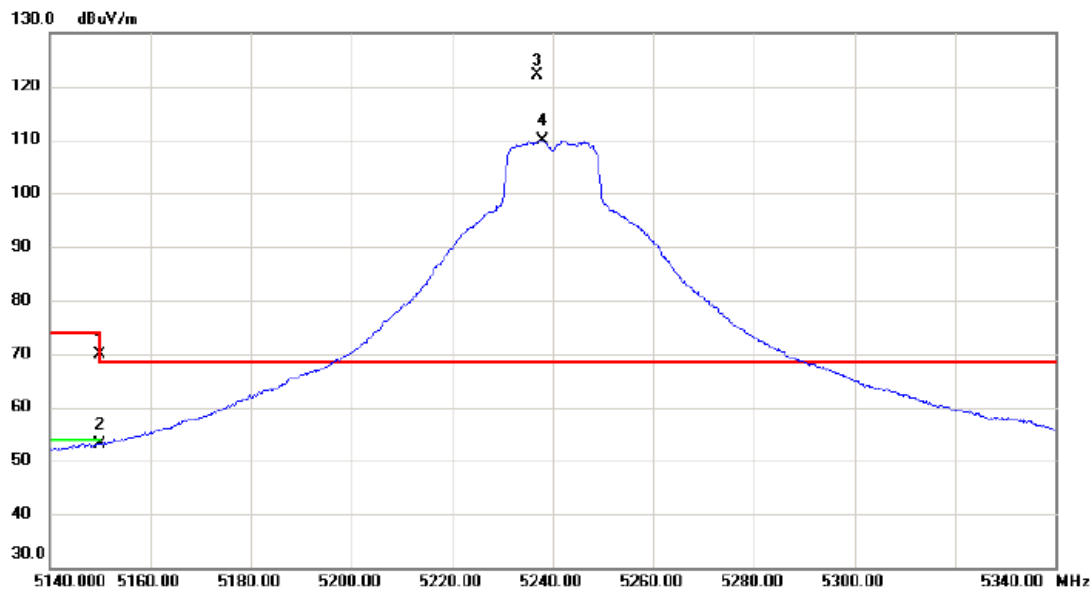

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5150.000	55.41	14.36	69.77	74.00	-4.23	peak	
2		5150.000	38.73	14.36	53.09	54.00	-0.91	AVG	
3	*	5236.900	107.58	14.51	122.09	68.30	53.79	peak	主波訊號不予判定
4	X	5237.900	95.46	14.51	109.97	68.30	41.67	AVG	主波訊號不予判定

測試頻道: IEEE 802.11ax (HE20) /
5240 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢測器: Peak/AV


測試日期: 108/06/26

環境溫度: 24 °C

環境濕度: 52%

Orthogonal Axis: X

Polarization: Vertical

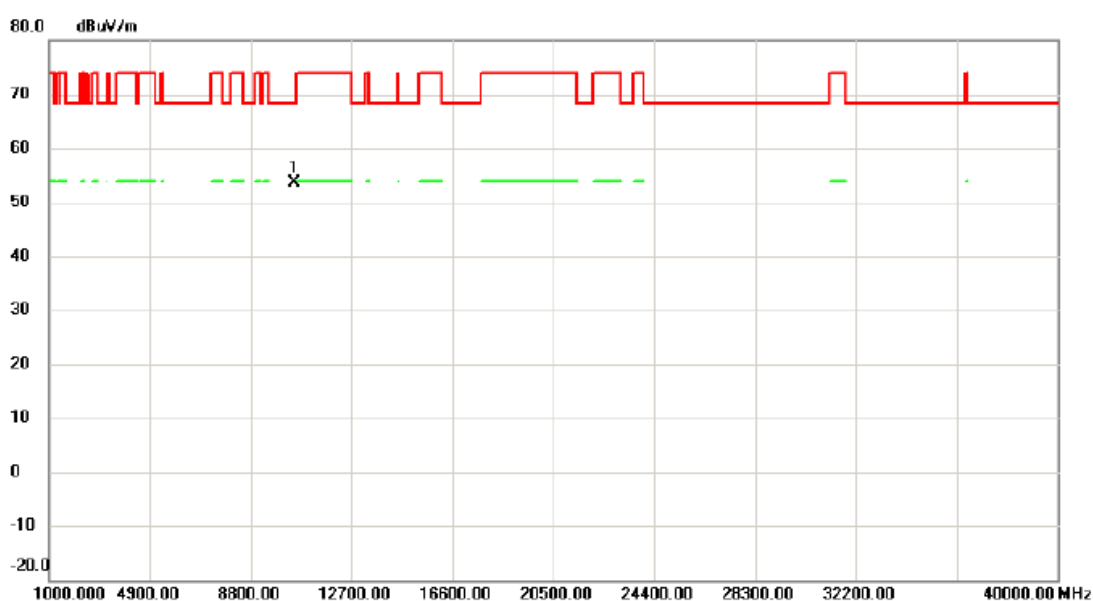

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10480.205	39.00	14.52	53.52	68.30	-14.78	peak	

測試頻道: IEEE 802.11ax (HE20) /
5240 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢測器: Peak/AV

環境溫度: 24 °C

測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz


測試距離: 3 米

測試日期: 108/06/22

環境濕度: 52%

Orthogonal Axis: X

Polarization: Horizontal

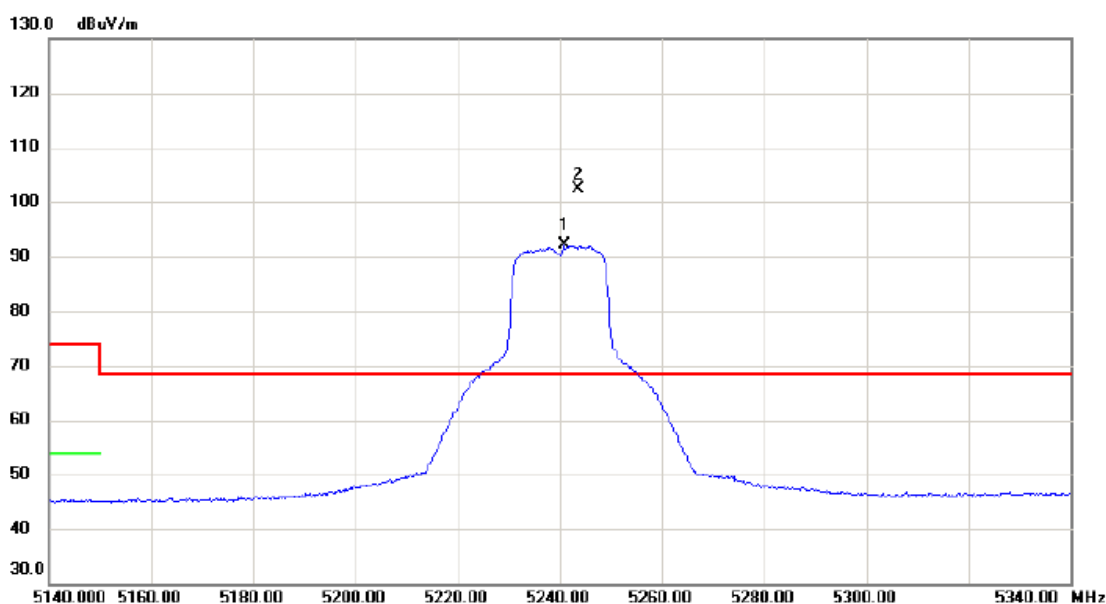

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	5240.800	77.64	14.51	92.15	68.30	23.85	AVG	主波訊號不予判定
2	*	5243.700	87.95	14.52	102.47	68.30	34.17	peak	主波訊號不予判定

測試頻道: IEEE 802.11ax (HE20) /
5240 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢測器: Peak/AV


測試日期: 108/06/26

環境溫度: 24 °C

環境濕度: 52%

Orthogonal Axis: X

Polarization: Horizontal

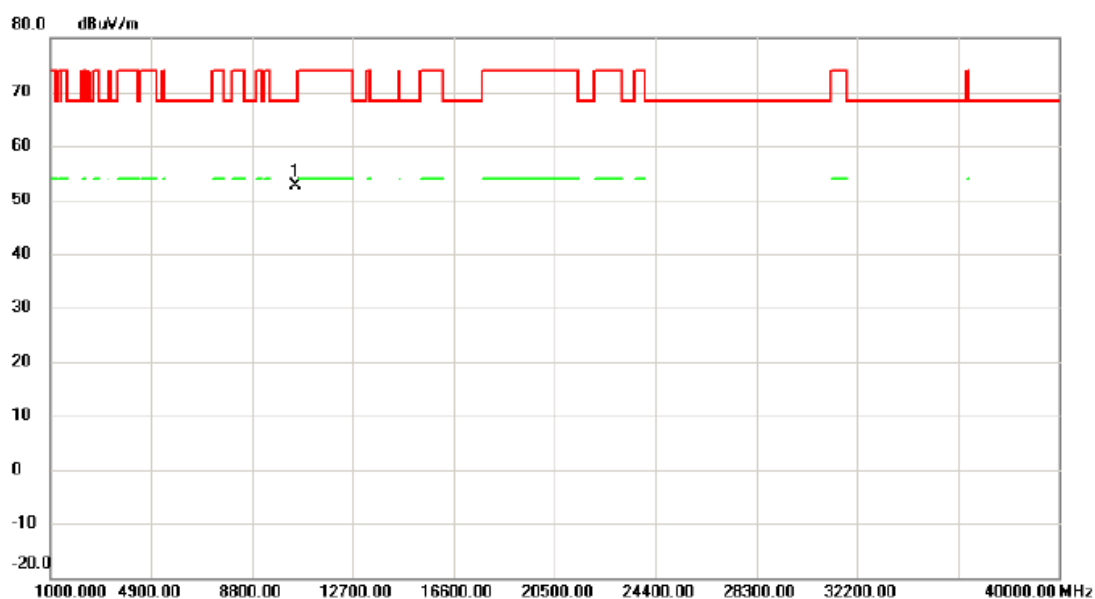

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10478.330	38.09	14.52	52.61	68.30	-15.69	peak	

測試頻道: IEEE 802.11ax (HE40) /
5190 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢測器: Peak/AV

環境溫度: 24 °C

測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz


測試距離: 3 米

測試日期: 108/06/22

環境濕度: 52%

Orthogonal Axis: X

Polarization: Vertical

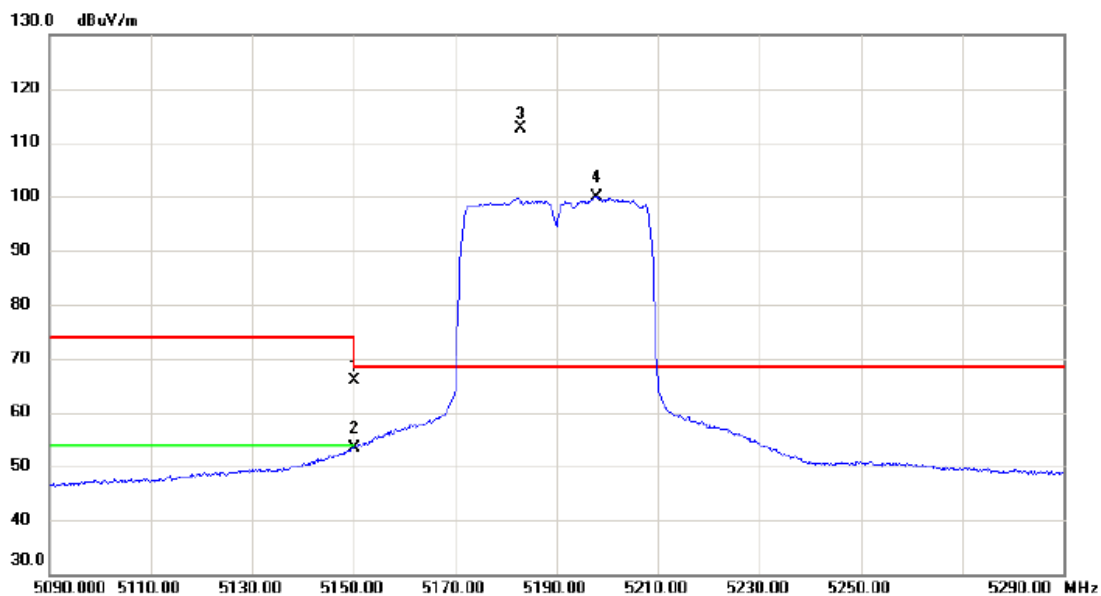


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5150.000	51.49	14.36	65.85	74.00	-8.15	peak	
2		5150.000	38.98	14.36	53.34	54.00	-0.66	AVG	
3	*	5182.800	98.20	14.42	112.62	68.30	44.32	peak	主波訊號不予判定
4	X	5197.800	85.40	14.45	99.85	68.30	31.55	AVG	主波訊號不予判定

測試頻道: IEEE 802.11ax (HE40) /
5190 MHz
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢測器: Peak/AV
環境溫度: 24 °C

測試模式: 發射
視頻頻寬: 1000 kHz / 10 Hz
測試距離: 3 米
測試日期: 108/06/26
環境濕度: 52%

Orthogonal Axis: X

Polarization: Vertical

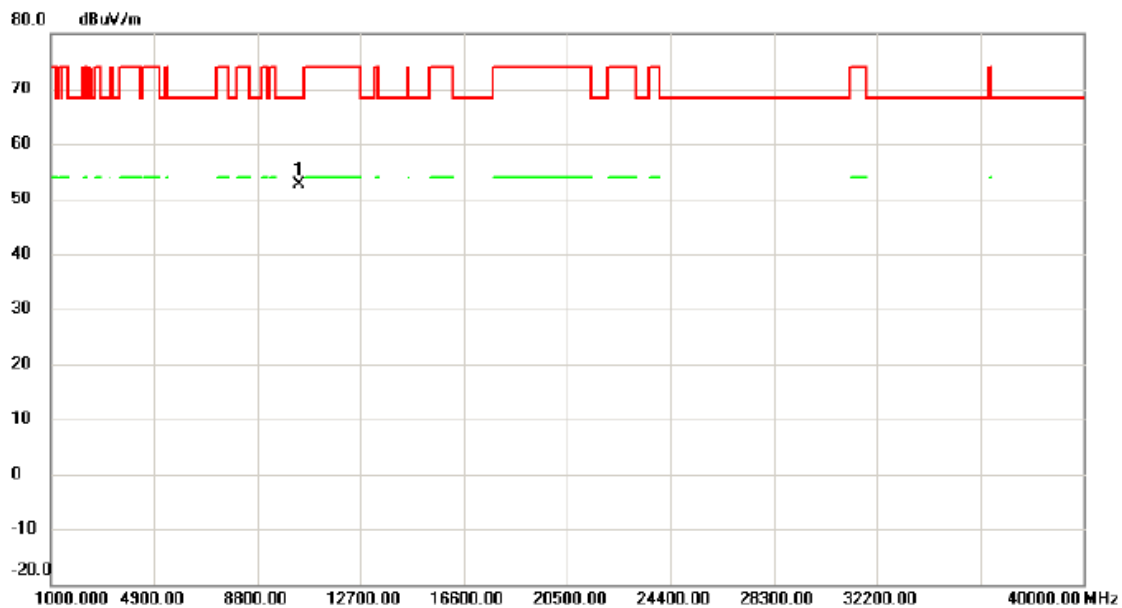

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	10378.175	38.44	14.19	52.63	68.30	-15.67	peak	

測試頻道: IEEE 802.11ax (HE40) /
5190 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢測器: Peak/AV


測試日期: 108/06/22

環境溫度: 24 °C

環境濕度: 52%

Orthogonal Axis: X

Polarization: Horizontal

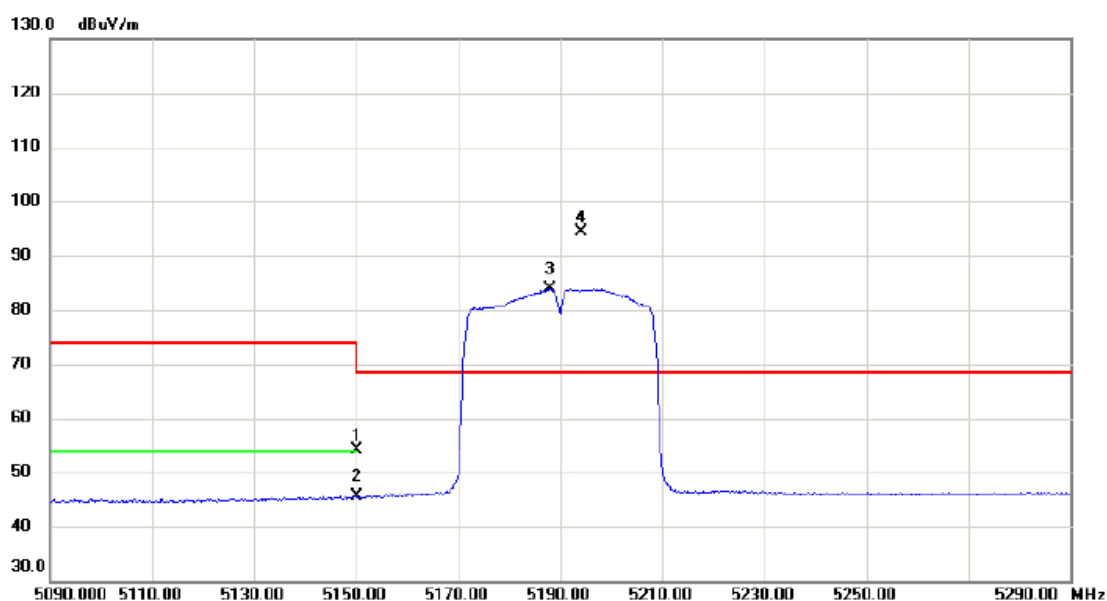

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5150.000	39.67	14.36	54.03	74.00	-19.97	peak	
2		5150.000	31.33	14.36	45.69	54.00	-8.31	AVG	
3	X	5188.100	69.40	14.42	83.82	68.30	15.52	AVG	主波訊號不予判定
4	*	5194.000	79.94	14.44	94.38	68.30	26.08	peak	主波訊號不予判定

測試頻道: IEEE 802.11ax (HE40) /
5190 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢測器: Peak/AV

環境溫度: 24 °C

測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz


測試距離: 3 米

測試日期: 108/06/26

環境濕度: 52%

Orthogonal Axis: X

Polarization: Horizontal

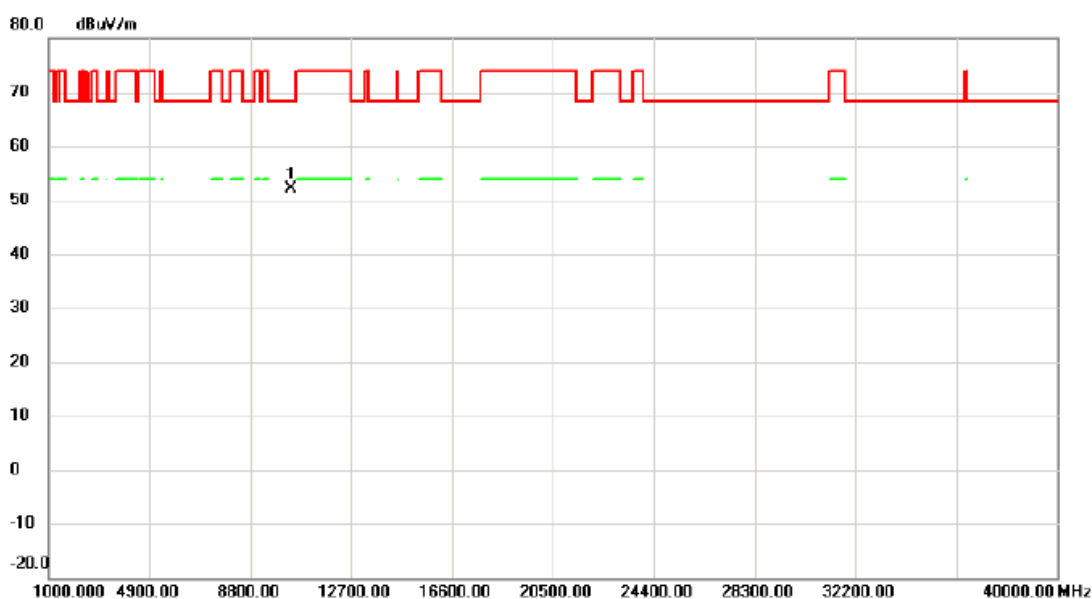

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10379.475	37.86	14.19	52.05	68.30	-16.25	peak	

測試頻道: IEEE 802.11ax (HE40) /
5230 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢測器: Peak/AV


測試日期: 108/06/22

環境溫度: 24 °C

環境濕度: 52%

Orthogonal Axis: X

Polarization: Vertical

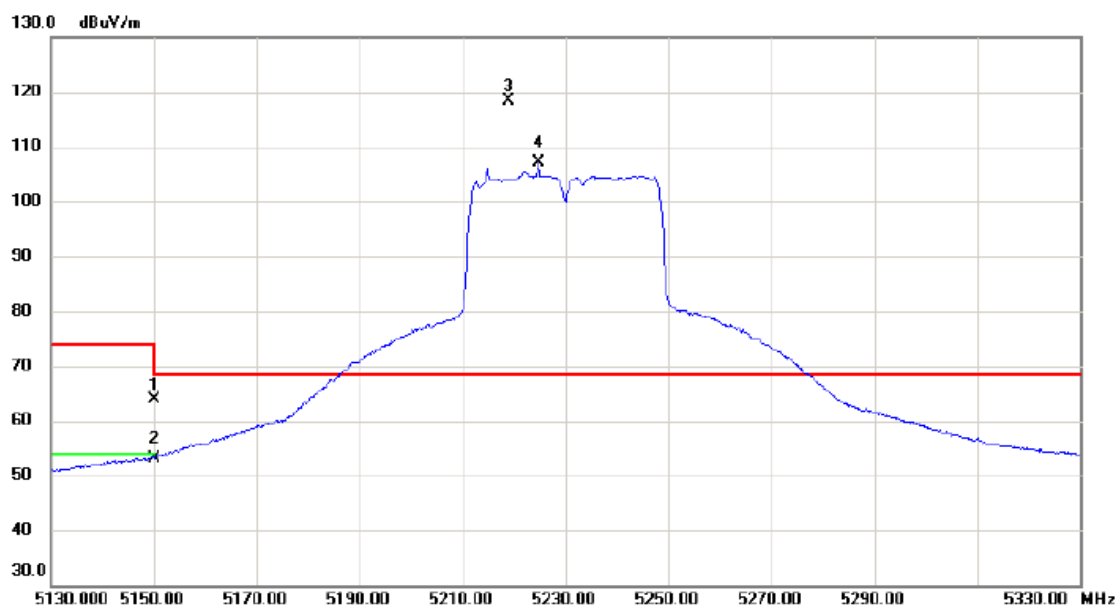


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5150.000	49.52	14.36	63.88	74.00	-10.12	peak	
2		5150.000	38.84	14.36	53.20	54.00	-0.80	AVG	
3	*	5219.000	103.97	14.48	118.45	68.30	50.15	peak	主波訊號不予判定
4	X	5224.900	92.56	14.49	107.05	68.30	38.75	AVG	主波訊號不予判定

測試頻道: IEEE 802.11ax (HE40) /
5230 MHz
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢測器: Peak/AV
環境溫度: 24 °C

測試模式: 發射
視頻頻寬: 1000 kHz / 10 Hz
測試距離: 3 米
測試日期: 108/06/26
環境濕度: 52%

Orthogonal Axis: X

Polarization: Vertical

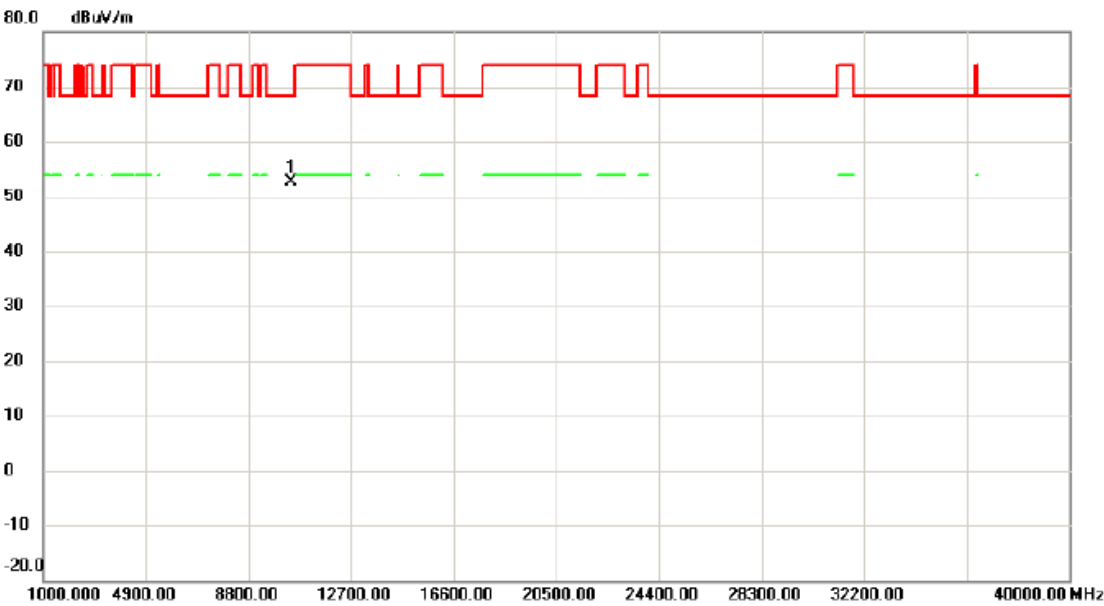

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	10458.000	38.11	14.44	52.55	68.30	-15.75	peak	

測試頻道: IEEE 802.11ax (HE40) /
5230 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢測器: Peak/AV

環境溫度: 24 °C

測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz


測試距離: 3 米

測試日期: 108/06/22

環境濕度: 52%

Orthogonal Axis: X

Polarization: Horizontal

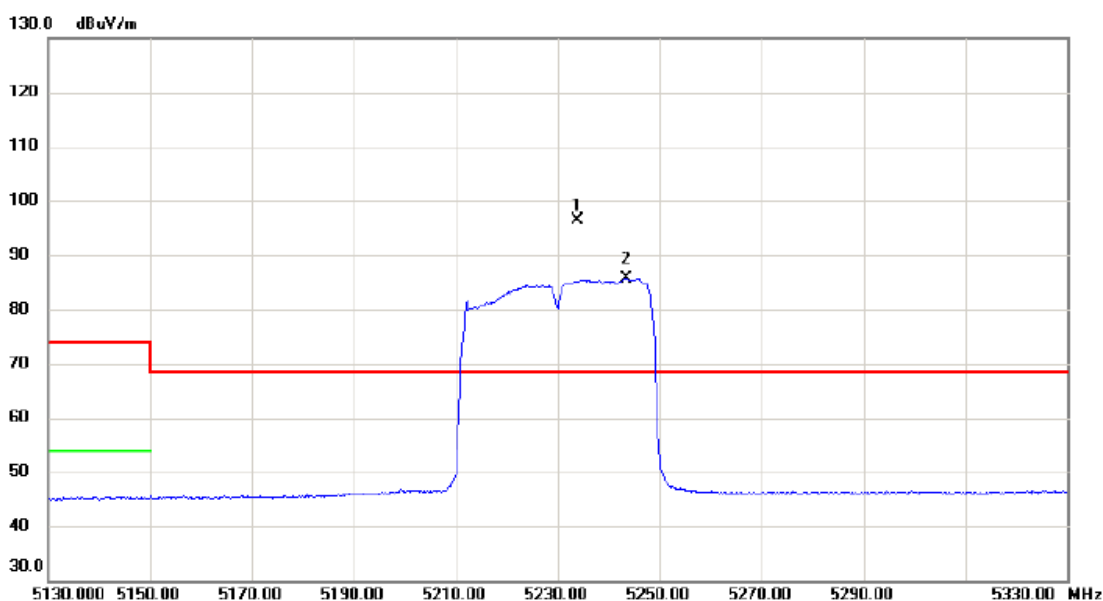

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	5233.800	81.92	14.51	96.43	68.30	28.13	peak	主波訊號不予判定
2	X	5243.400	71.18	14.52	85.70	68.30	17.40	AVG	主波訊號不予判定

測試頻道: IEEE 802.11ax (HE40) /
5230 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢測器: Peak/AV


測試日期: 108/06/26

環境溫度: 24 °C

環境濕度: 52%

Orthogonal Axis: X

Polarization: Horizontal

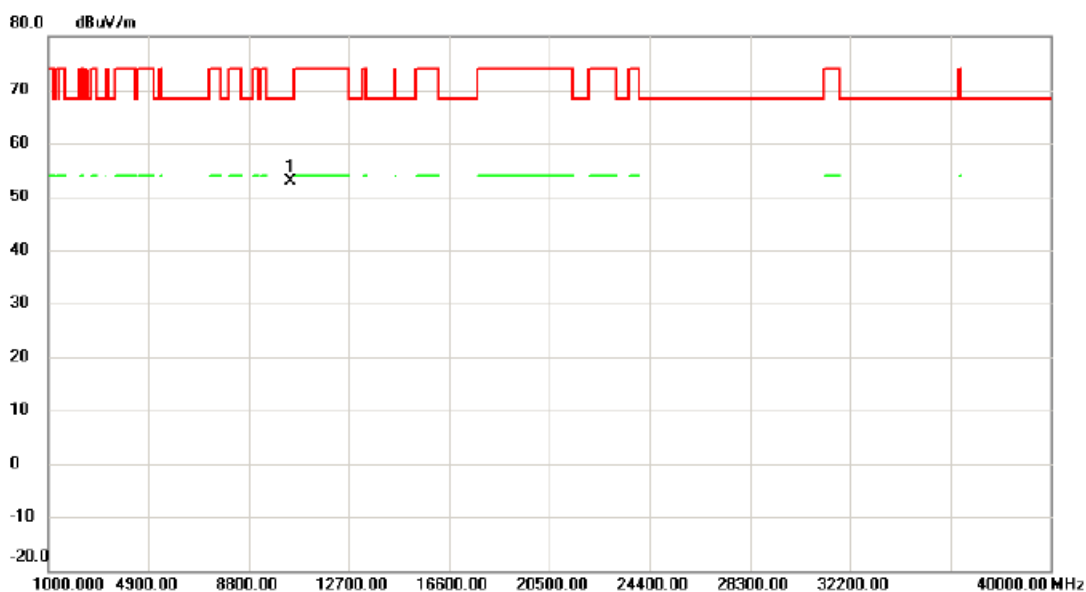

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10459.235	38.53	14.46	52.99	68.30	-15.31	peak	

測試頻道: IEEE 802.11ax (HE80) /
5210 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢測器: Peak/AV


測試日期: 108/06/22

環境溫度: 24 °C

環境濕度: 52%

Orthogonal Axis: X

Polarization: Vertical

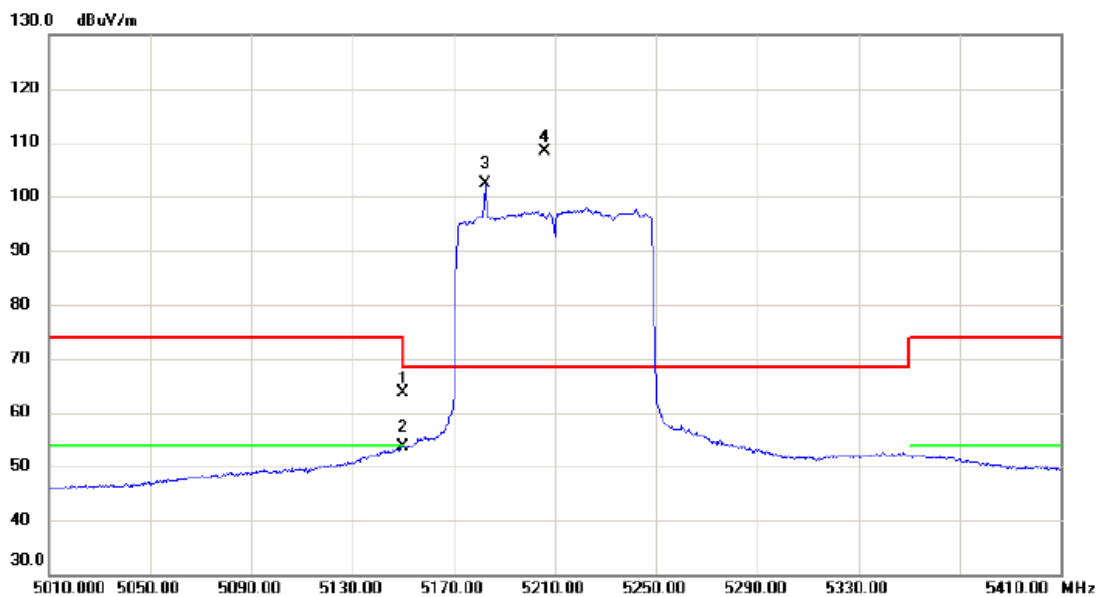

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5150.000	49.33	14.36	63.69	74.00	-10.31	peak	
2		5150.000	39.19	14.36	53.55	54.00	-0.45	AVG	
3	X	5182.400	87.91	14.42	102.33	68.30	34.03	AVG	主波訊號不予判定
4	*	5206.200	93.99	14.45	108.44	68.30	40.14	peak	主波訊號不予判定

測試頻道: IEEE 802.11ax (HE80) /
5210 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢測器: Peak/AV


測試日期: 108/06/26

環境溫度: 24 °C

環境濕度: 52%

Orthogonal Axis: X

Polarization: Vertical

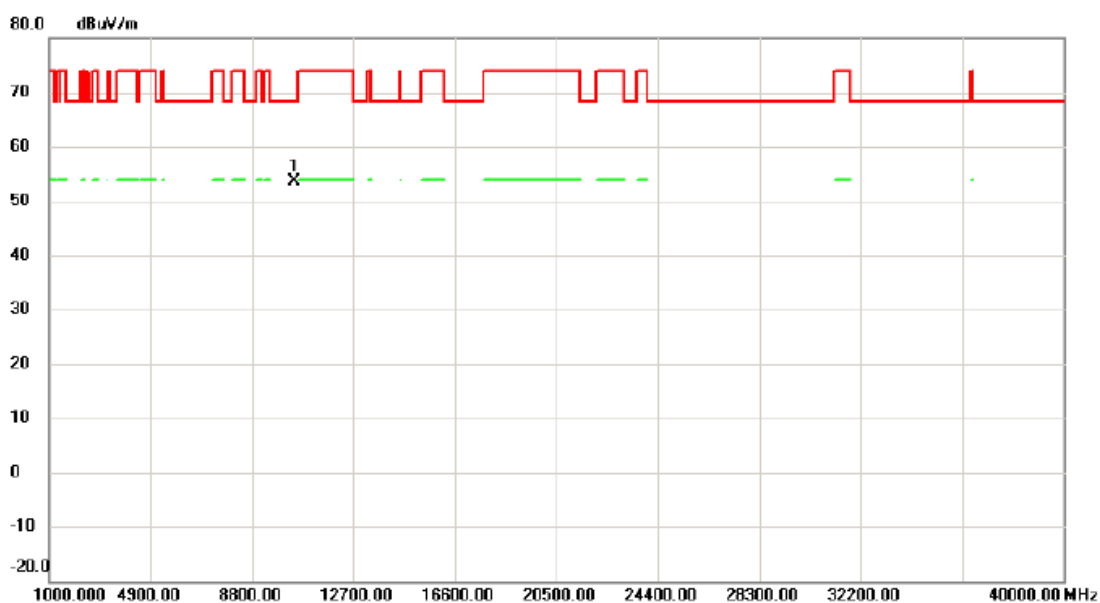

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	10420.245	39.24	14.33	53.57	68.30	-14.73	peak	

測試頻道: IEEE 802.11ax (HE80) /
5210 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢測器: Peak/AV


測試日期: 108/06/22

環境溫度: 24 °C

環境濕度: 52%

Orthogonal Axis: X

Polarization: Horizontal

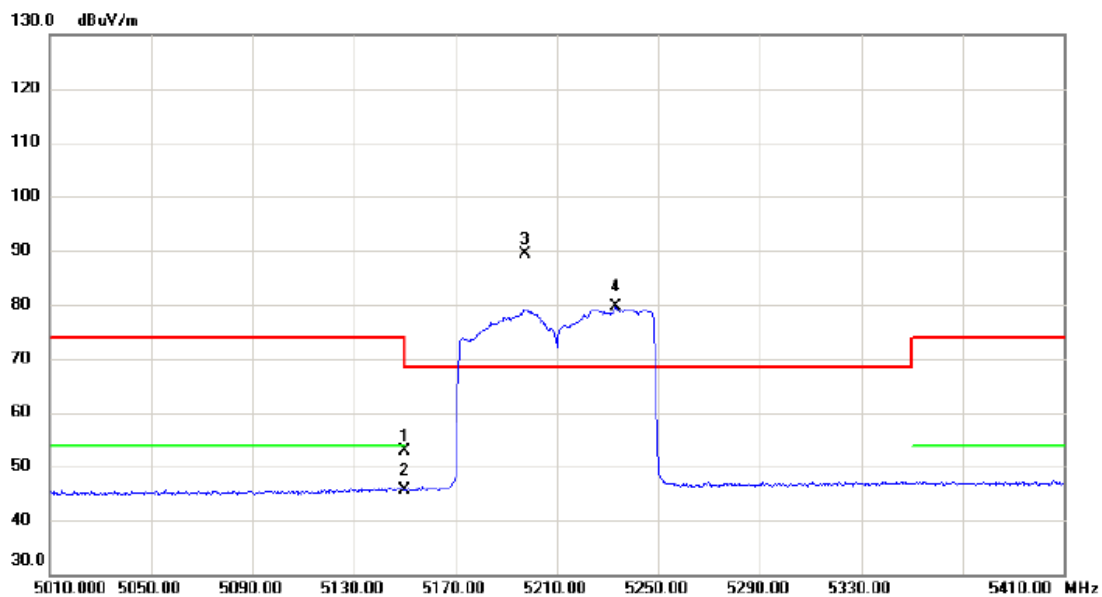

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5150.000	38.60	14.36	52.96	74.00	-21.04	peak	
2		5150.000	31.23	14.36	45.59	54.00	-8.41	AVG	
3	*	5197.600	74.83	14.45	89.28	68.30	20.98	peak	主波訊號不予判定
4	X	5233.400	65.07	14.51	79.58	68.30	11.28	AVG	主波訊號不予判定

測試頻道: IEEE 802.11ax (HE80) /
5210 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢測器: Peak/AV


測試日期: 108/06/26

環境溫度: 24 °C

環境濕度: 52%

Orthogonal Axis: X

Polarization: Horizontal

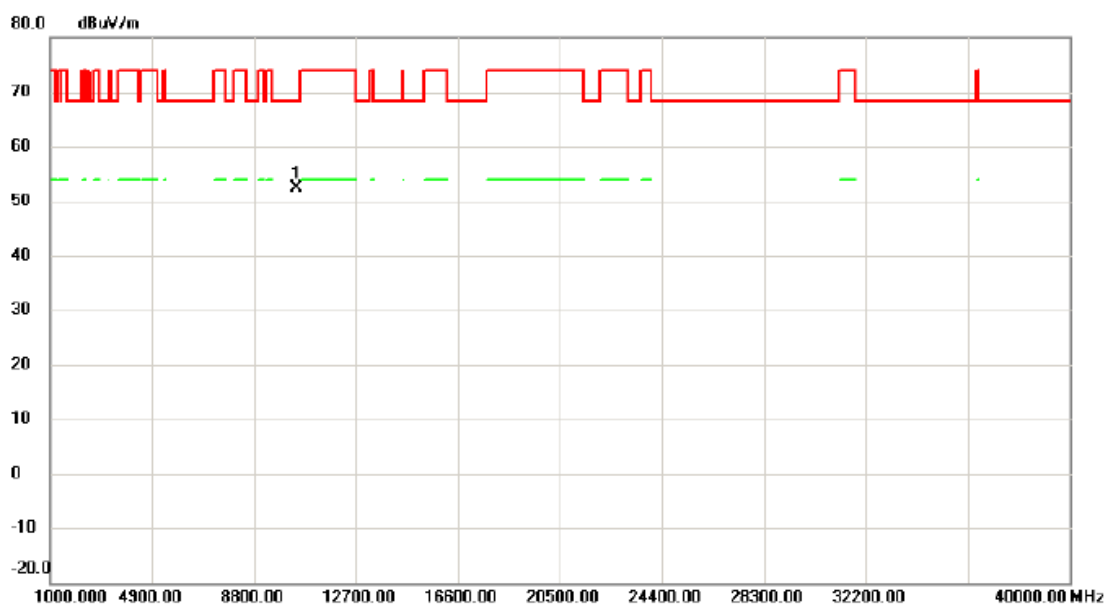

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	10418.155	38.00	14.31	52.31	68.30	-15.99	peak	

測試頻道: IEEE 802.11ax (HE20) /
5745 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢測器: Peak/AV


測試日期: 108/06/22

環境溫度: 24 °C

環境濕度: 52%

Orthogonal Axis: X

Polarization: Vertical

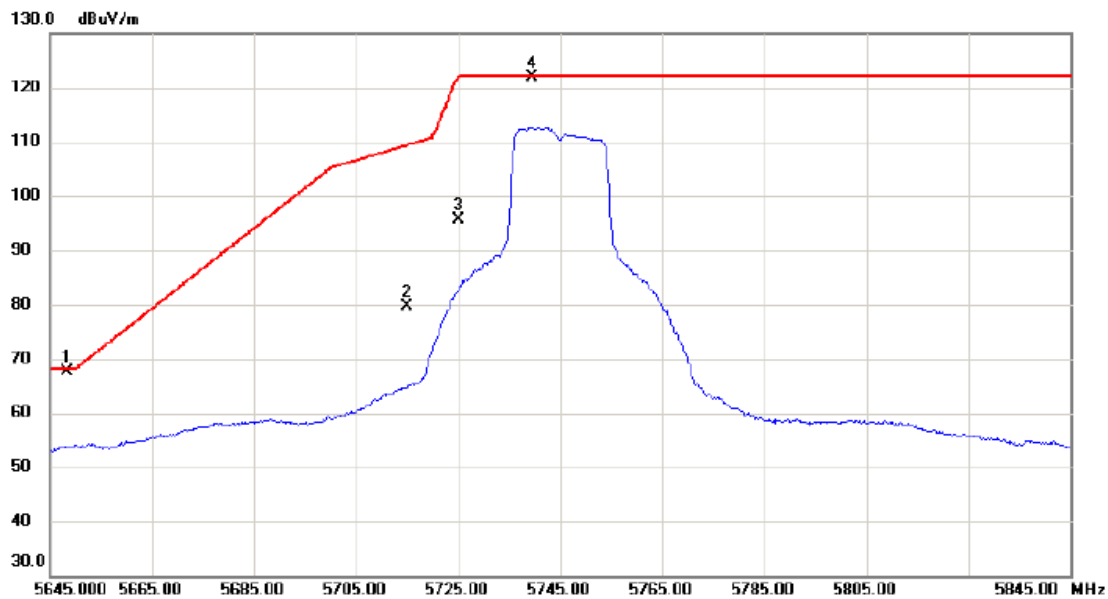

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5648.400	52.39	15.17	67.56	68.20	-0.64	peak	
2		5715.000	64.36	15.26	79.62	109.40	-29.78	peak	
3		5725.000	80.26	15.27	95.53	122.20	-26.67	peak	
4 *		5739.600	106.68	15.29	121.97	122.20	-0.23	peak	主波訊號不予判定

測試頻道: IEEE 802.11ax (HE20) /
5745 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢測器: Peak/AV


測試日期: 108/06/26

環境溫度: 24 °C

環境濕度: 52%

Orthogonal Axis: X

Polarization: Vertical

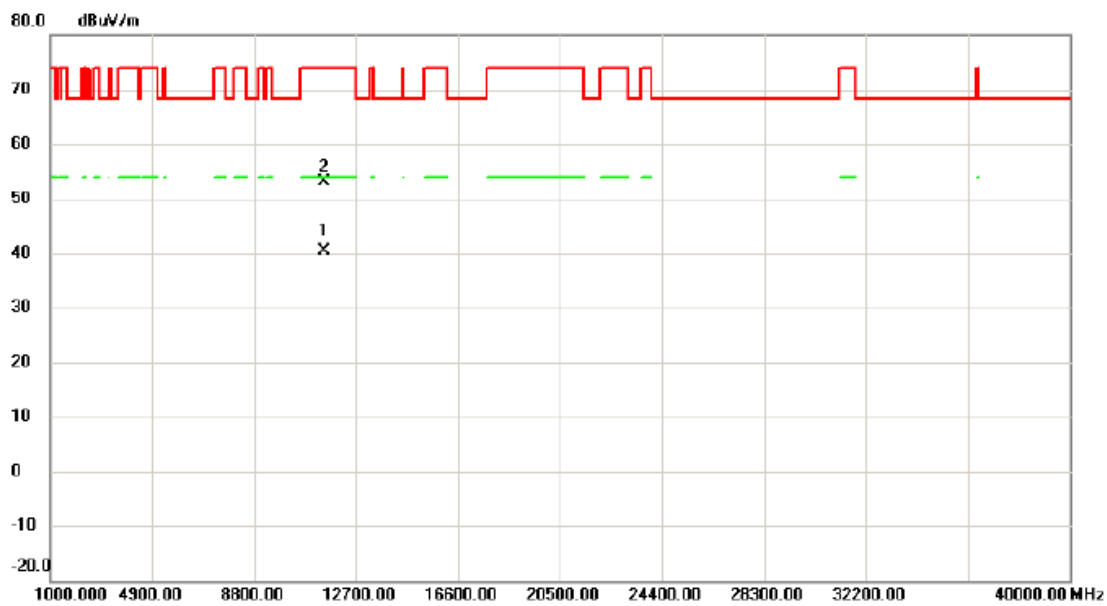

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	11487.805	23.53	16.73	40.26	54.00	-13.74	AVG	
2		11490.915	36.49	16.74	53.23	74.00	-20.77	peak	

測試頻道: IEEE 802.11ax (HE20) /
5745 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢測器: Peak/AV


測試日期: 108/06/22

環境溫度: 24 °C

環境濕度: 52%

Orthogonal Axis: X

Polarization: Horizontal

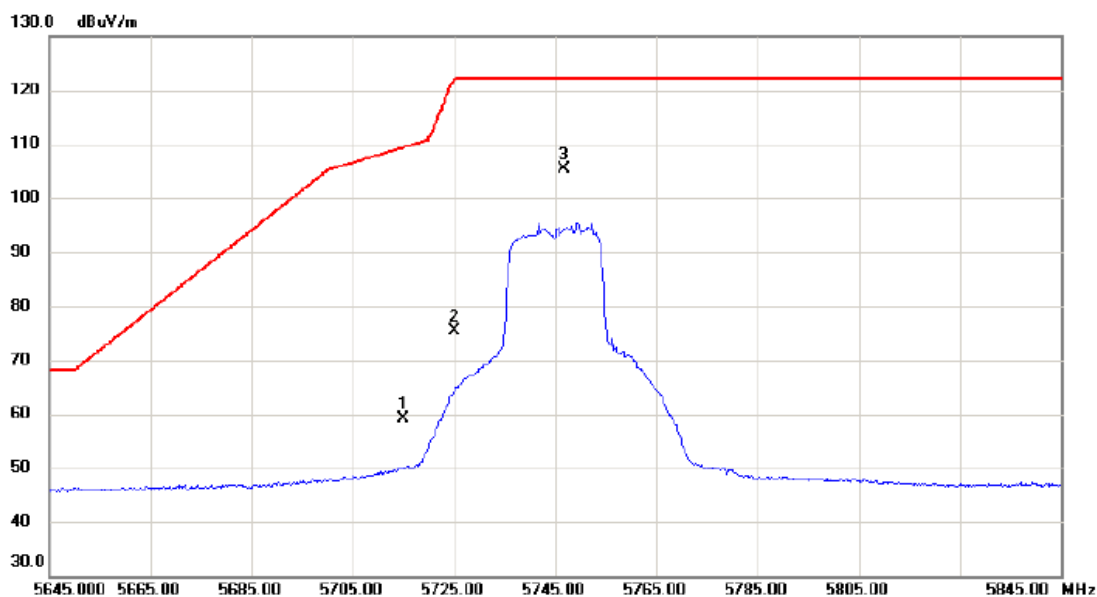

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5715.000	43.84	15.26	59.10	109.40	-50.30	peak	
2		5725.000	60.01	15.27	75.28	122.20	-46.92	peak	
3	*	5746.800	90.00	15.30	105.30	122.20	-16.90	peak	主波訊號不予判定

測試頻道: IEEE 802.11ax (HE20) /
5745 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢測器: Peak/AV


測試日期: 108/06/26

環境溫度: 24 °C

環境濕度: 52%

Orthogonal Axis: X

Polarization: Horizontal

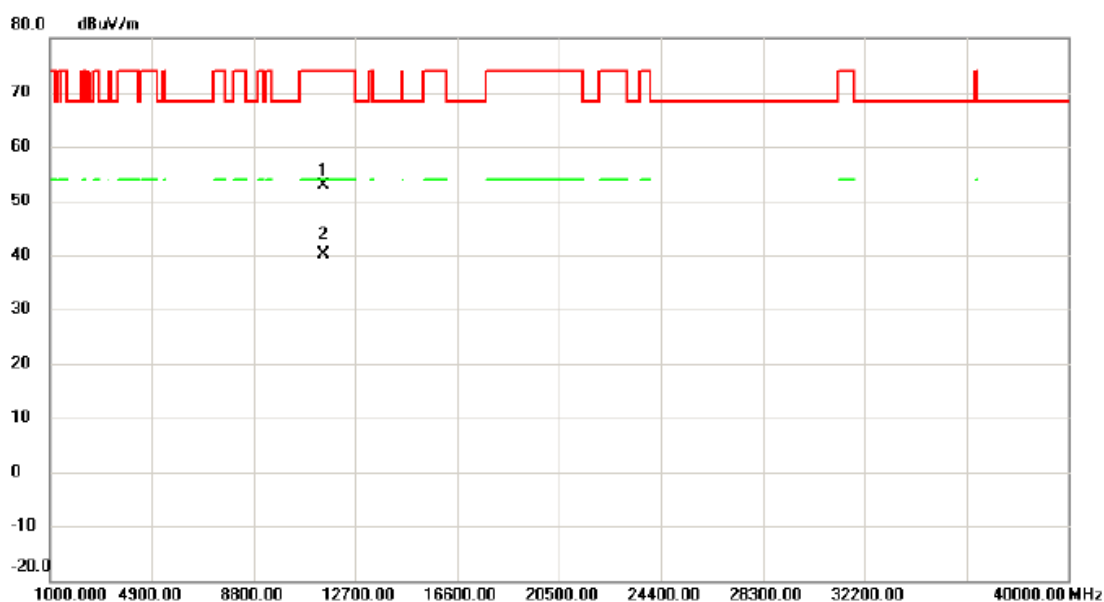

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11489.145	36.12	16.73	52.85	74.00	-21.15	peak	
2	*	11489.660	23.38	16.73	40.11	54.00	-13.89	AVG	

測試頻道: IEEE 802.11ax (HE20) /
5785 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢測器: Peak/AV


測試日期: 108/06/22

環境溫度: 24 °C

環境濕度: 52%

Orthogonal Axis: X

Polarization: Vertical

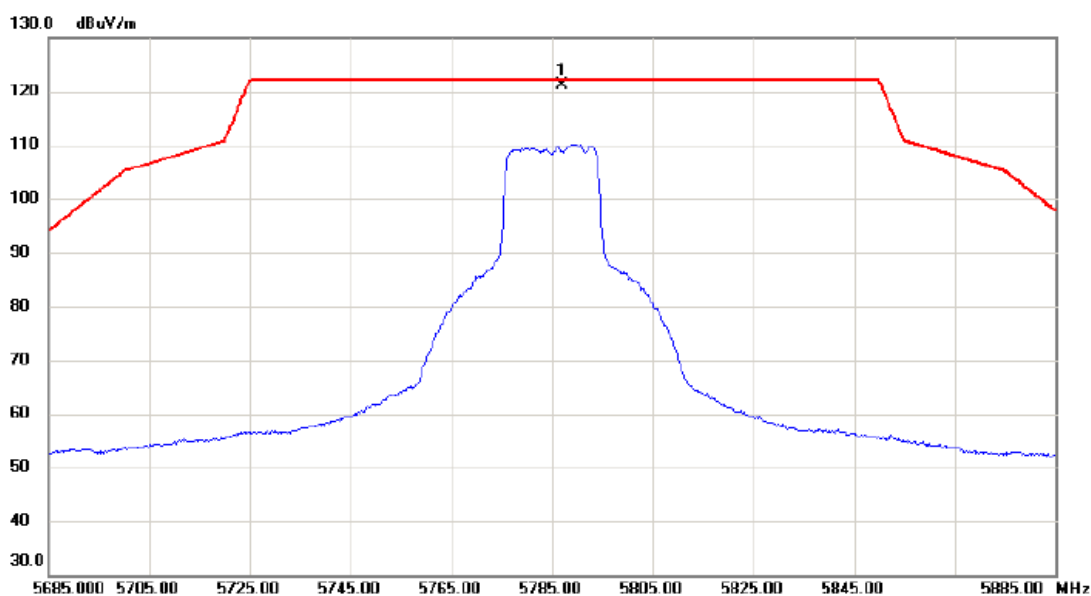

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	5786.900	105.66	15.35	121.01	122.20	-1.19	peak	主波訊號不予判定

測試頻道: IEEE 802.11ax (HE20) /
5785 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢測器: Peak/AV


測試日期: 108/06/26

環境溫度: 24 °C

環境濕度: 52%

Orthogonal Axis: X

Polarization: Vertical

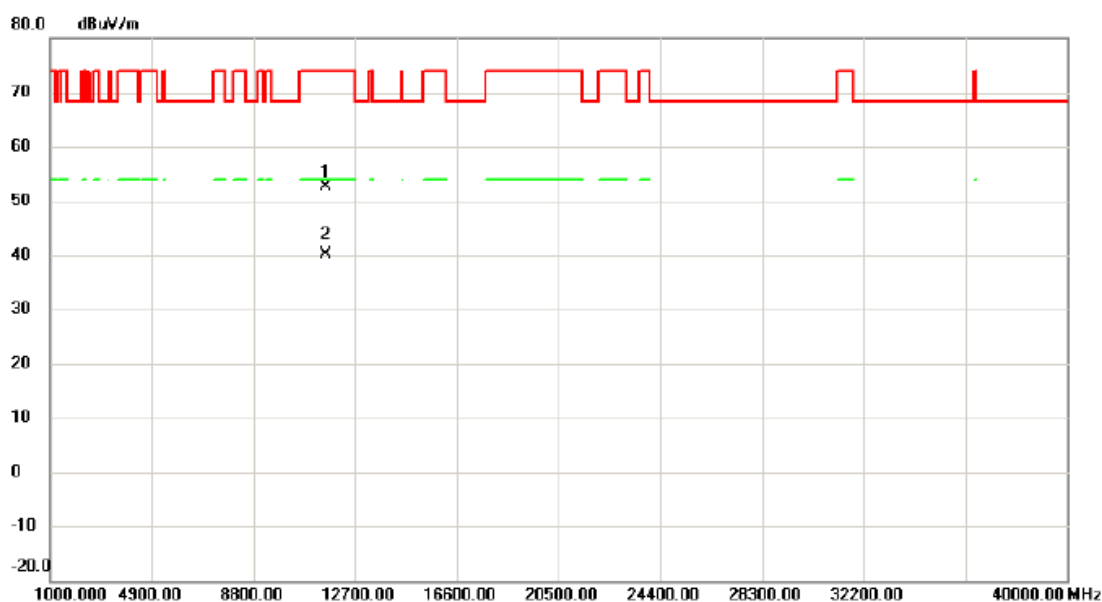

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11570.980	36.17	16.55	52.72	74.00	-21.28	peak	
2 *		11571.540	23.63	16.54	40.17	54.00	-13.83	AVG	

測試頻道: IEEE 802.11ax (HE20) /
5785 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢測器: Peak/AV


測試日期: 108/06/22

環境溫度: 24 °C

環境濕度: 52%

Orthogonal Axis: X

Polarization: Horizontal

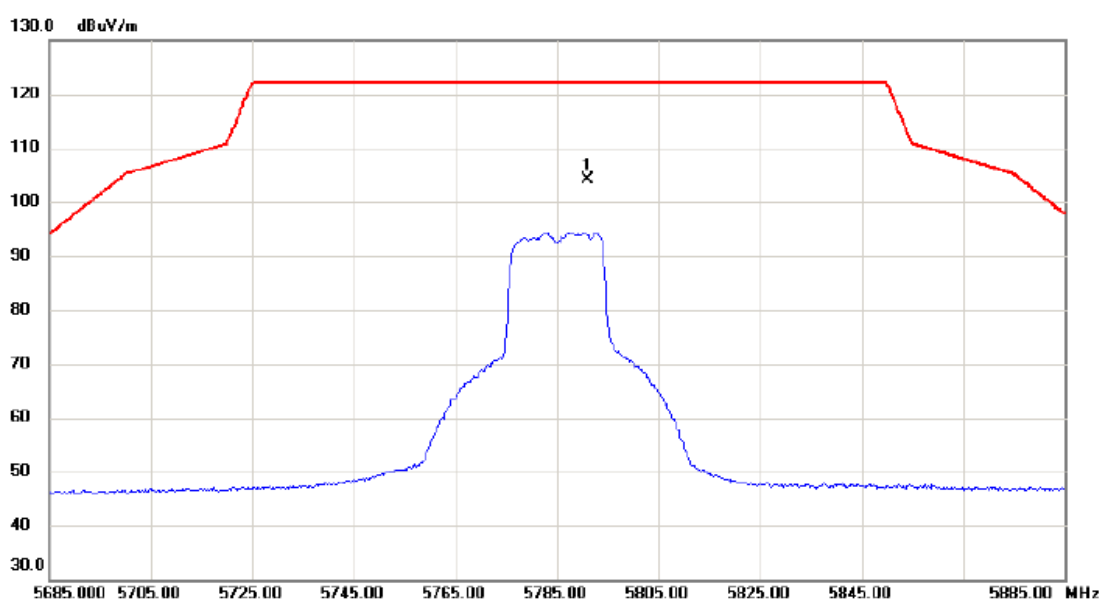

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	5791.100	88.72	15.35	104.07	122.20	-18.13	peak	主波訊號不予判定

測試頻道: IEEE 802.11ax (HE20) /
5785 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢測器: Peak/AV


測試日期: 108/06/26

環境溫度: 24 °C

環境濕度: 52%

Orthogonal Axis: X

Polarization: Horizontal

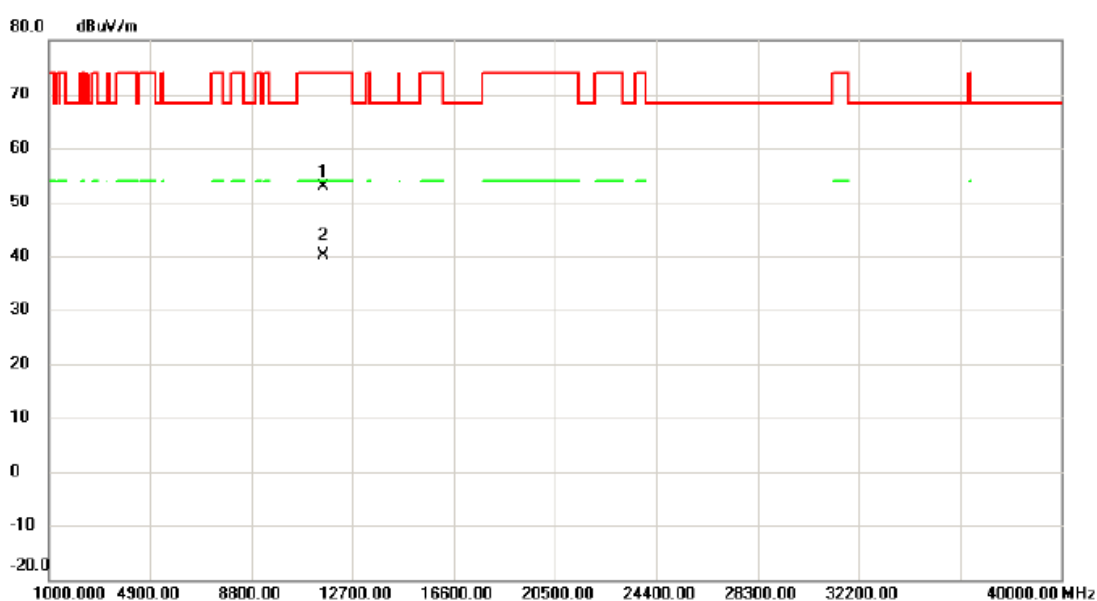

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11569.255	36.42	16.55	52.97	74.00	-21.03	peak	
2	*	11570.585	23.48	16.55	40.03	54.00	-13.97	AVG	

測試頻道: IEEE 802.11ax (HE20) /
5825 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢測器: Peak/AV


測試日期: 108/06/22

環境溫度: 24 °C

環境濕度: 52%

Orthogonal Axis: X

Polarization: Vertical

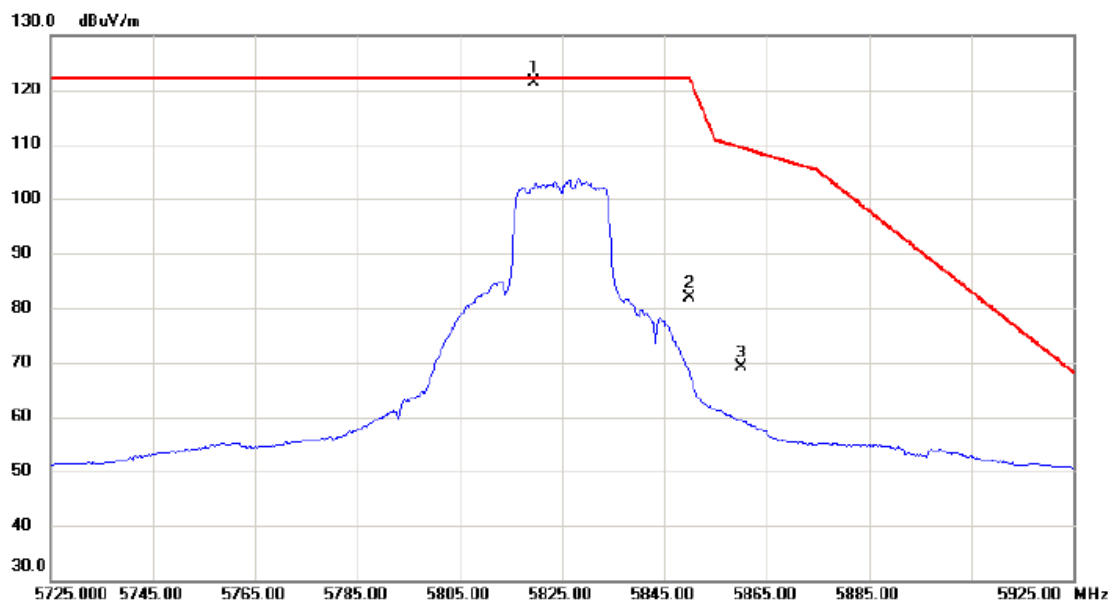

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	5819.500	105.93	15.39	121.32	122.20	-0.88	peak	主波訊號不予判定
2		5850.000	66.50	15.43	81.93	122.20	-40.27	peak	
3		5860.000	53.66	15.44	69.10	109.40	-40.30	peak	

測試頻道: IEEE 802.11ax (HE20) /
5825 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢測器: Peak/AV


測試日期: 108/06/26

環境溫度: 24 °C

環境濕度: 52%

Orthogonal Axis: X

Polarization: Vertical

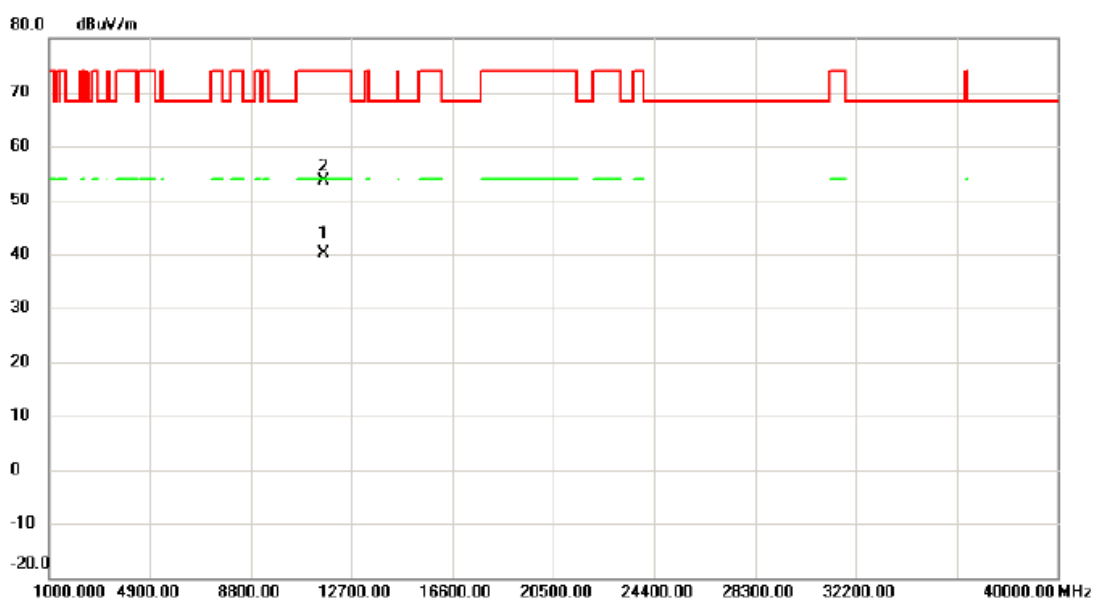

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	11648.030	23.82	16.33	40.15	54.00	-13.85	AVG	
2		11652.320	37.31	16.31	53.62	74.00	-20.38	peak	

測試頻道: IEEE 802.11ax (HE20) /
5825 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢測器: Peak/AV


測試日期: 108/06/22

環境溫度: 24 °C

環境濕度: 52%

Orthogonal Axis: X

Polarization: Horizontal

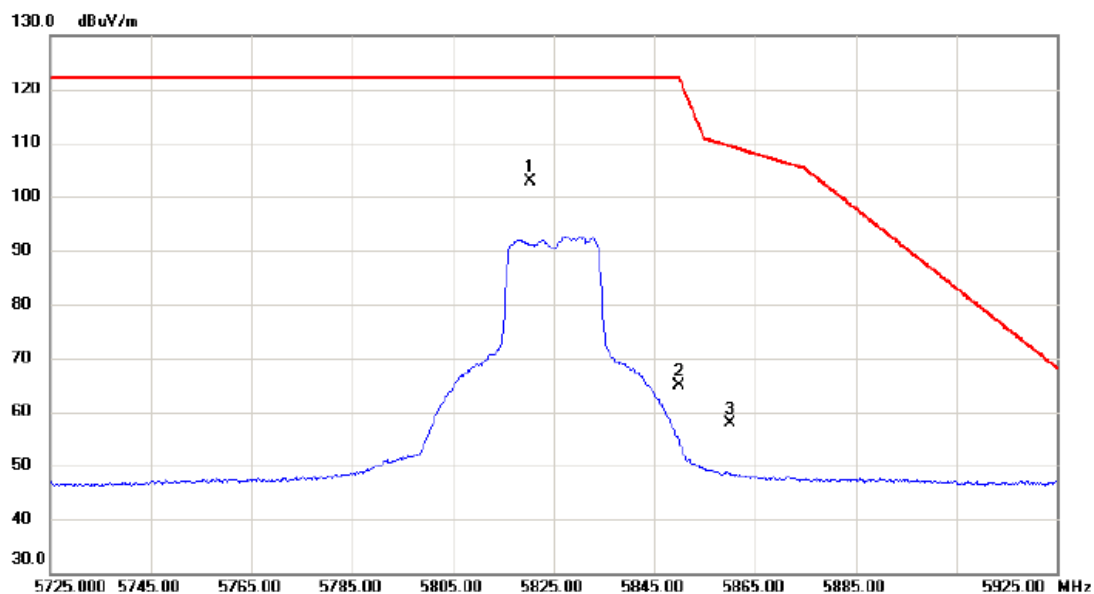

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	5820.400	87.49	15.39	102.88	122.20	-19.32	peak	主波訊號不予判定
2		5850.000	49.34	15.43	64.77	122.20	-57.43	peak	
3		5860.000	42.39	15.44	57.83	109.40	-51.57	peak	

測試頻道: IEEE 802.11ax (HE20) /
5825 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢測器: Peak/AV


測試日期: 108/06/26

環境溫度: 24 °C

環境濕度: 52%

Orthogonal Axis: X

Polarization: Horizontal

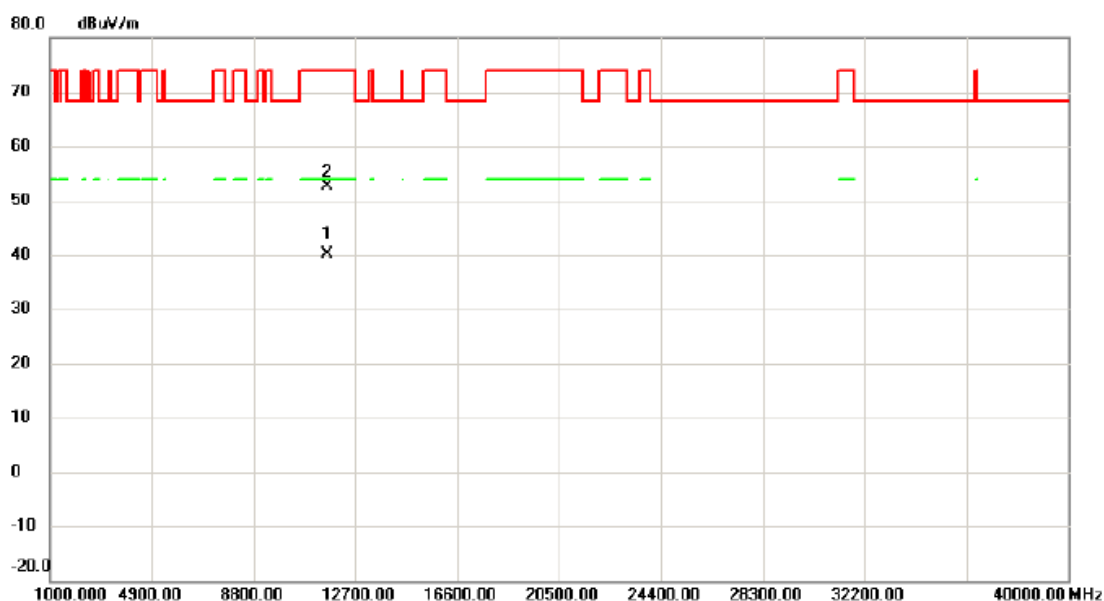

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	11649.255	23.79	16.32	40.11	54.00	-13.89	AVG	
2		11649.790	36.42	16.32	52.74	74.00	-21.26	peak	

測試頻道: IEEE 802.11ax (HE40) /
5755 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢測器: Peak/AV


測試日期: 108/06/22

環境溫度: 24 °C

環境濕度: 52%

Orthogonal Axis: X

Polarization: Vertical

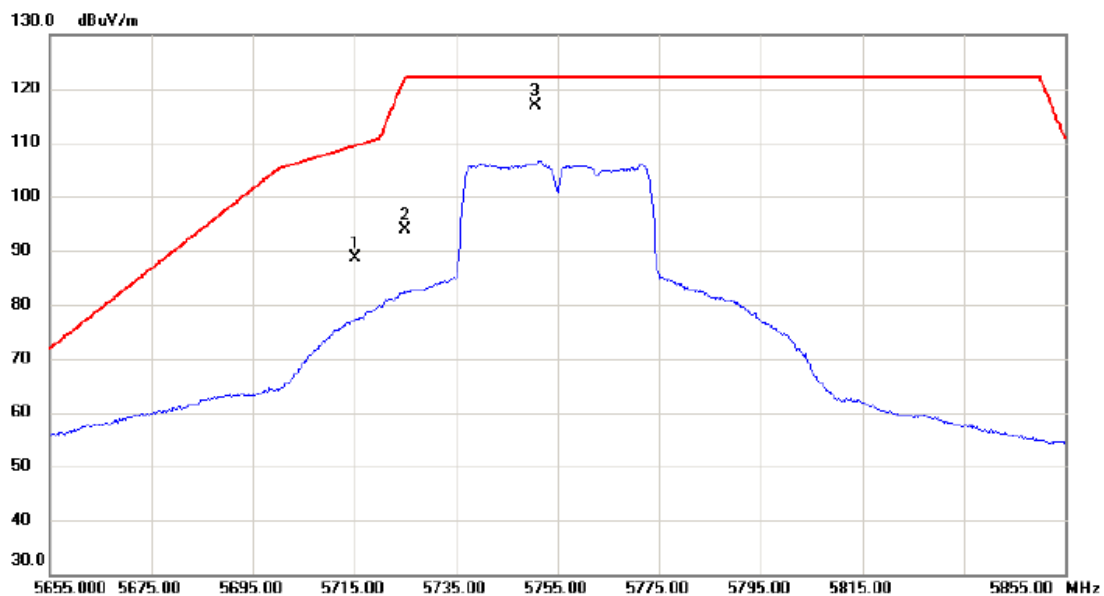

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5715.000	73.46	15.26	88.72	109.40	-20.68	peak	
2		5725.000	78.59	15.27	93.86	122.20	-28.34	peak	
3 *		5750.700	101.64	15.30	116.94	122.20	-5.26	peak	主波訊號不予判定

測試頻道: IEEE 802.11ax (HE40) /
5755 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢測器: Peak/AV


測試日期: 108/06/26

環境溫度: 24 °C

環境濕度: 52%

Orthogonal Axis: X

Polarization: Vertical

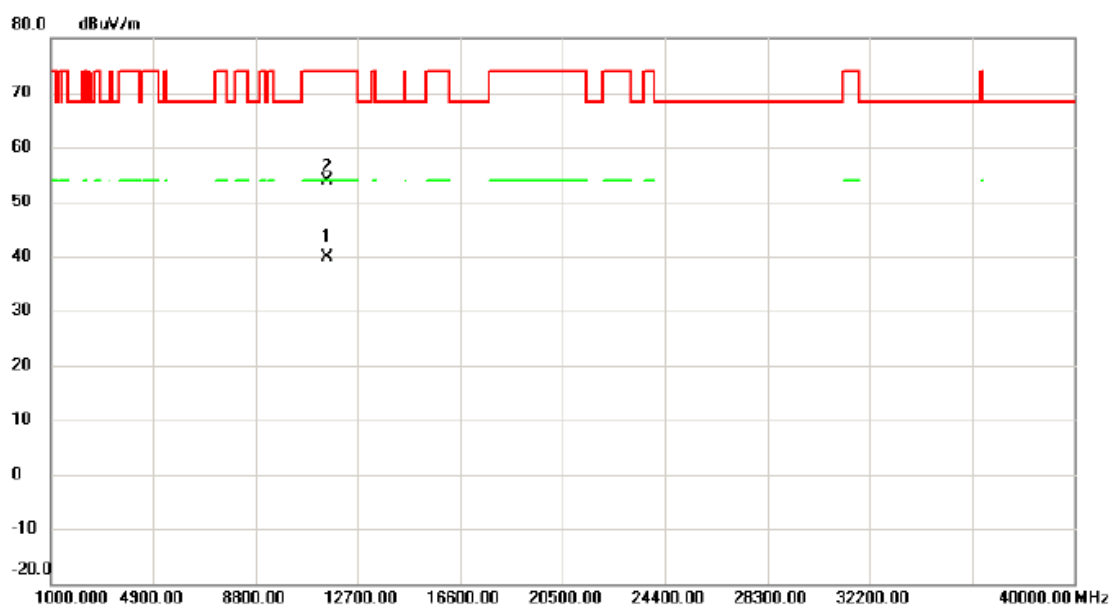

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	11508.570	23.20	16.73	39.93	54.00	-14.07	AVG	
2		11511.910	37.05	16.72	53.77	74.00	-20.23	peak	

測試頻道: IEEE 802.11ax (HE40) /
5755 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢測器: Peak/AV


測試日期: 108/06/22

環境溫度: 24 °C

環境濕度: 52%

Orthogonal Axis: X

Polarization: Horizontal

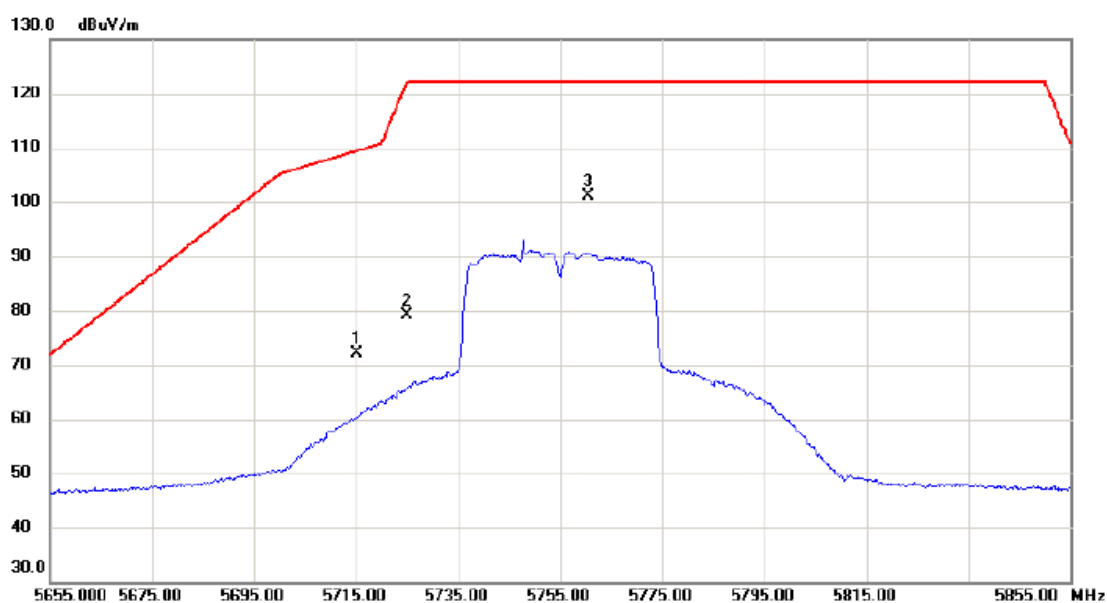


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5715.000	56.95	15.26	72.21	109.40	-37.19	peak	
2		5725.000	63.94	15.27	79.21	122.20	-42.99	peak	
3	*	5760.400	85.71	15.31	101.02	122.20	-21.18	peak	主波訊號不予判定

測試頻道: IEEE 802.11ax (HE40) /
5755 MHz
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢測器: Peak/AV
環境溫度: 24 °C

測試模式: 發射
視頻頻寬: 1000 kHz / 10 Hz
測試距離: 3 米
測試日期: 108/06/26
環境濕度: 52%

Orthogonal Axis: X

Polarization: Horizontal

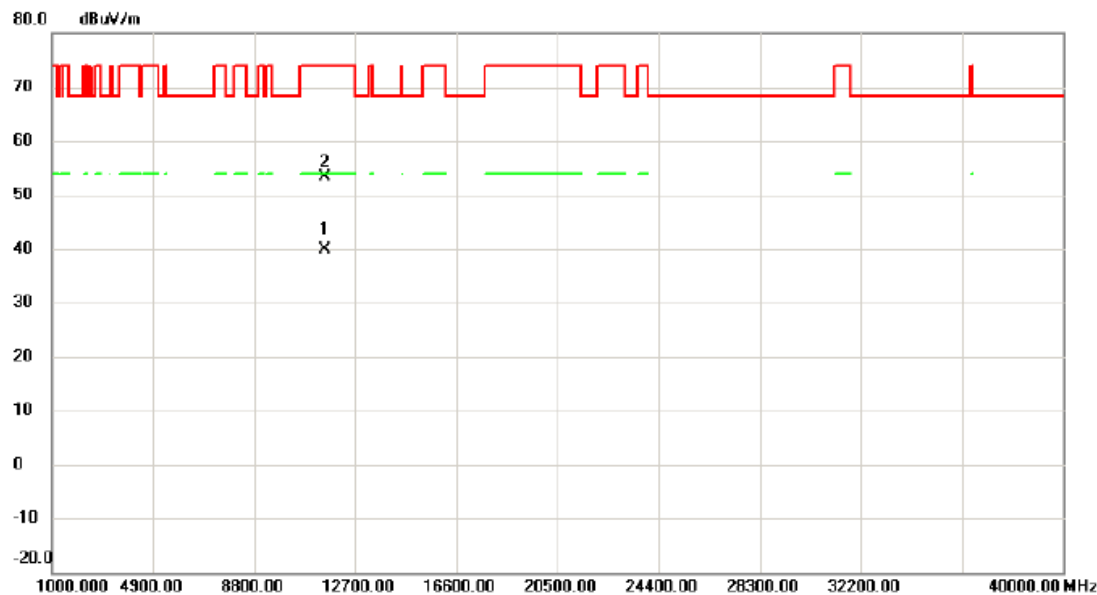

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	11509.520	23.26	16.73	39.99	54.00	-14.01	AVG	
2		11511.130	36.54	16.72	53.26	74.00	-20.74	peak	

測試頻道: IEEE 802.11ax (HE40) /
5795 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢測器: Peak/AV


測試日期: 108/06/22

環境溫度: 24 °C

環境濕度: 52%

Orthogonal Axis: X

Polarization: Vertical

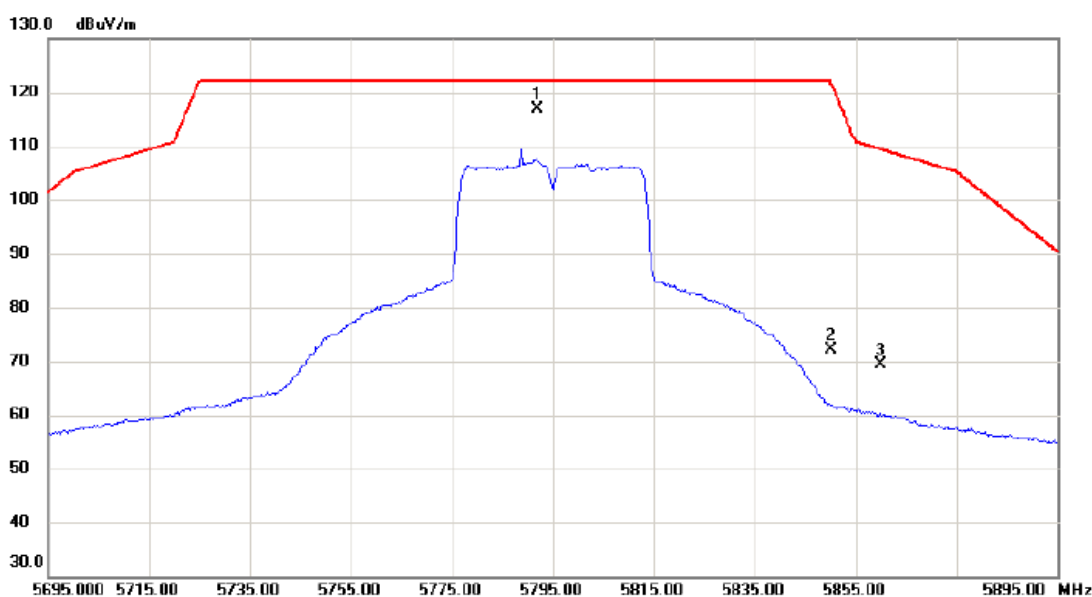

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	5792.000	101.62	15.35	116.97	122.20	-5.23	peak	主波訊號不予判定
2		5850.000	56.62	15.43	72.05	122.20	-50.15	peak	
3		5860.000	53.97	15.44	69.41	109.40	-39.99	peak	

測試頻道: IEEE 802.11ax (HE40) /
5795 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢測器: Peak/AV


測試日期: 108/06/26

環境溫度: 24 °C

環境濕度: 52%

Orthogonal Axis: X

Polarization: Vertical

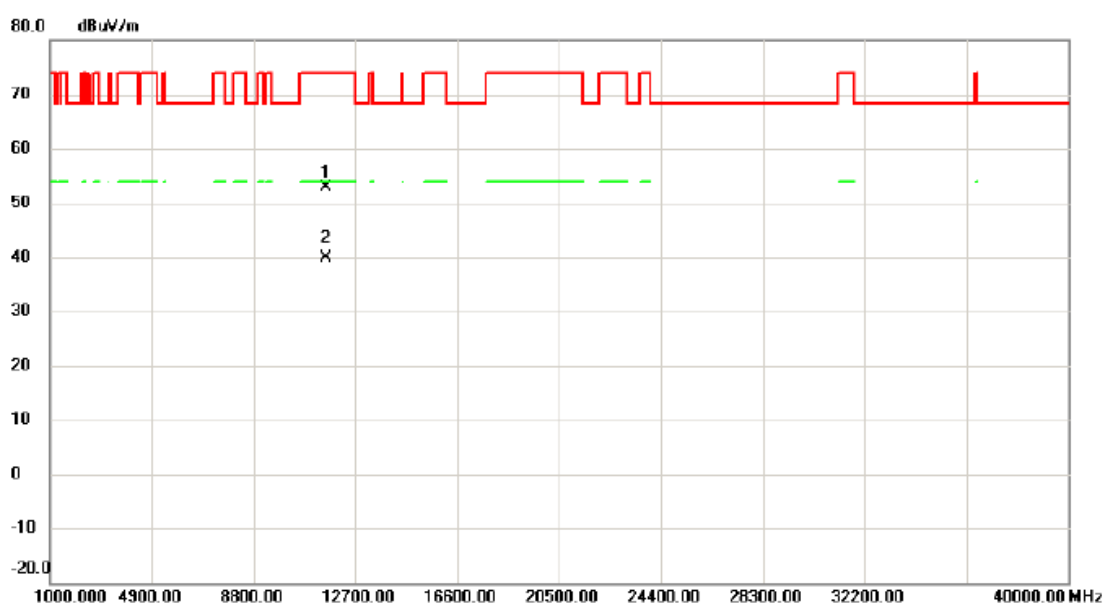

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11590.365	36.50	16.49	52.99	74.00	-21.01	peak	
2	*	11591.305	23.51	16.48	39.99	54.00	-14.01	AVG	

測試頻道: IEEE 802.11ax (HE40) /
5795 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢測器: Peak/AV


測試日期: 108/06/22

環境溫度: 24 °C

環境濕度: 52%

Orthogonal Axis: X

Polarization: Horizontal

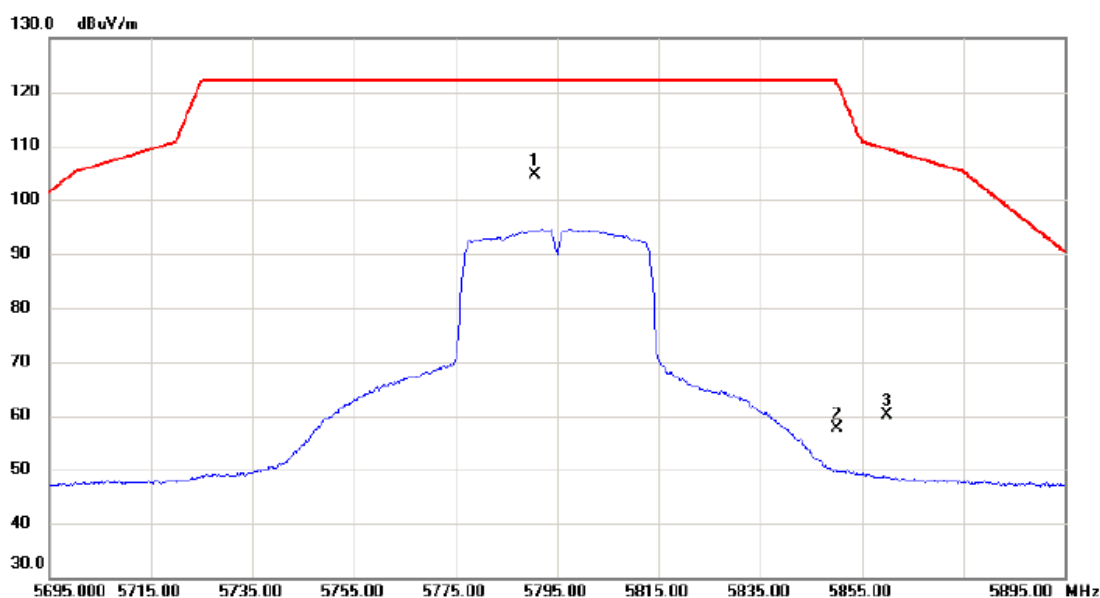

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	5790.600	89.19	15.35	104.54	122.20	-17.66	peak	主波訊號不予判定
2		5850.000	42.20	15.43	57.63	122.20	-64.57	peak	
3		5860.000	44.72	15.44	60.16	109.40	-49.24	peak	

測試頻道: IEEE 802.11 ax (HE40) /
5795 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢測器: Peak/AV


測試日期: 108/06/26

環境溫度: 24 °C

環境濕度: 52%

Orthogonal Axis: X

Polarization: Horizontal

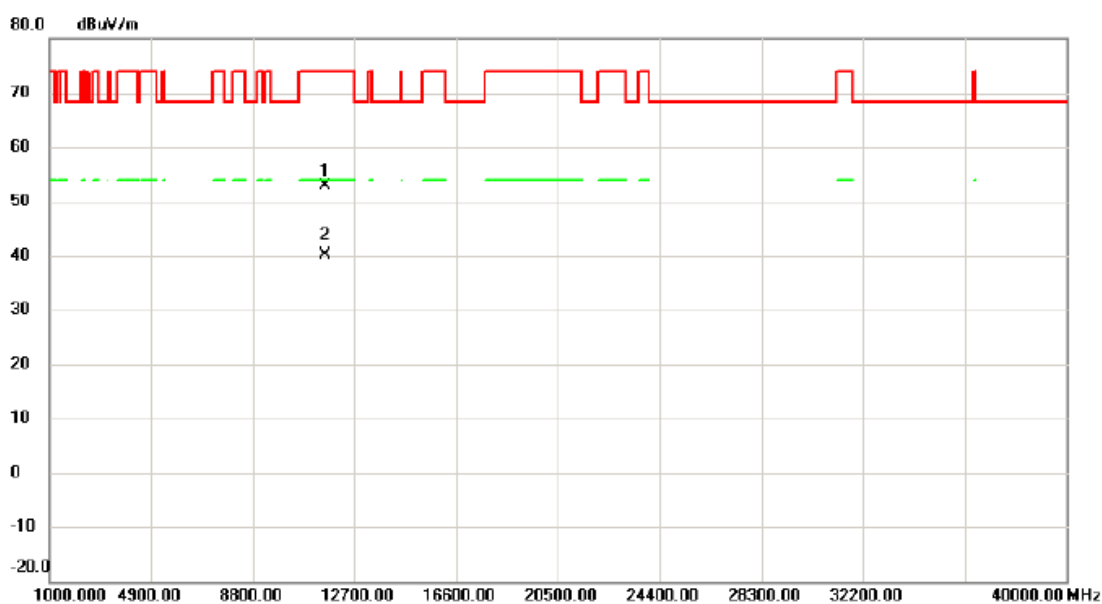

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11588.315	36.30	16.49	52.79	74.00	-21.21	peak	
2	*	11591.335	23.68	16.48	40.16	54.00	-13.84	AVG	

測試頻道: IEEE 802.11ax (HE80) /
5775 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢測器: Peak/AV


測試日期: 108/06/22

環境溫度: 24 °C

環境濕度: 52%

Orthogonal Axis: X

Polarization: Vertical

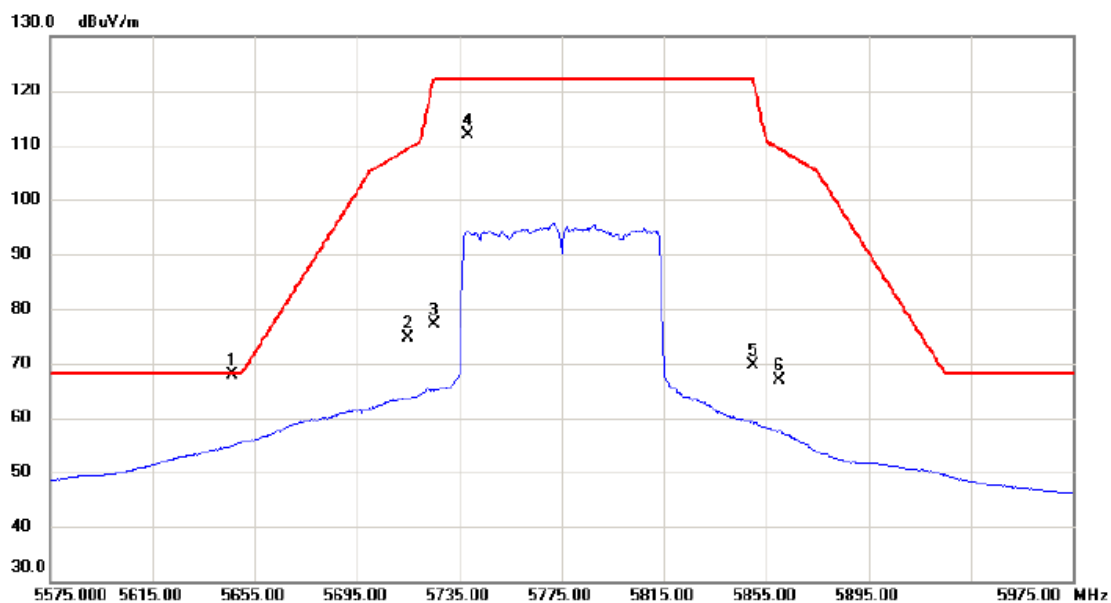

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	5646.200	52.80	15.17	67.97	68.20	-0.23	peak	
2		5715.000	59.32	15.26	74.58	109.40	-34.82	peak	
3		5725.000	61.87	15.27	77.14	122.20	-45.06	peak	
4		5738.600	96.63	15.28	111.91	122.20	-10.29	peak	主波訊號不予判定
5		5850.000	54.17	15.43	69.60	122.20	-52.60	peak	
6		5860.000	51.43	15.44	66.87	109.40	-42.53	peak	

測試頻道: IEEE 802.11ax (HE80) /
5775 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢測器: Peak/AV


測試日期: 108/06/26

環境溫度: 24 °C

環境濕度: 52%

Orthogonal Axis: X

Polarization: Vertical

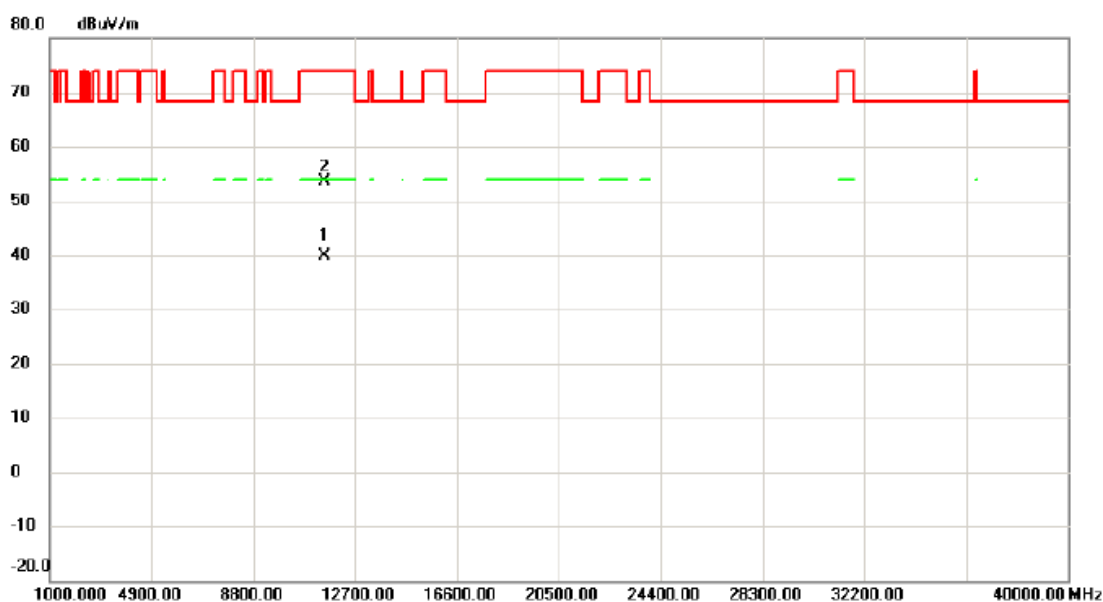

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	11551.550	23.34	16.61	39.95	54.00	-14.05	AVG	
2		11551.750	37.08	16.61	53.69	74.00	-20.31	peak	

測試頻道: IEEE 802.11ax (HE80) /
5775 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢測器: Peak/AV


測試日期: 108/06/22

環境溫度: 24 °C

環境濕度: 52%

Orthogonal Axis: X

Polarization: Horizontal

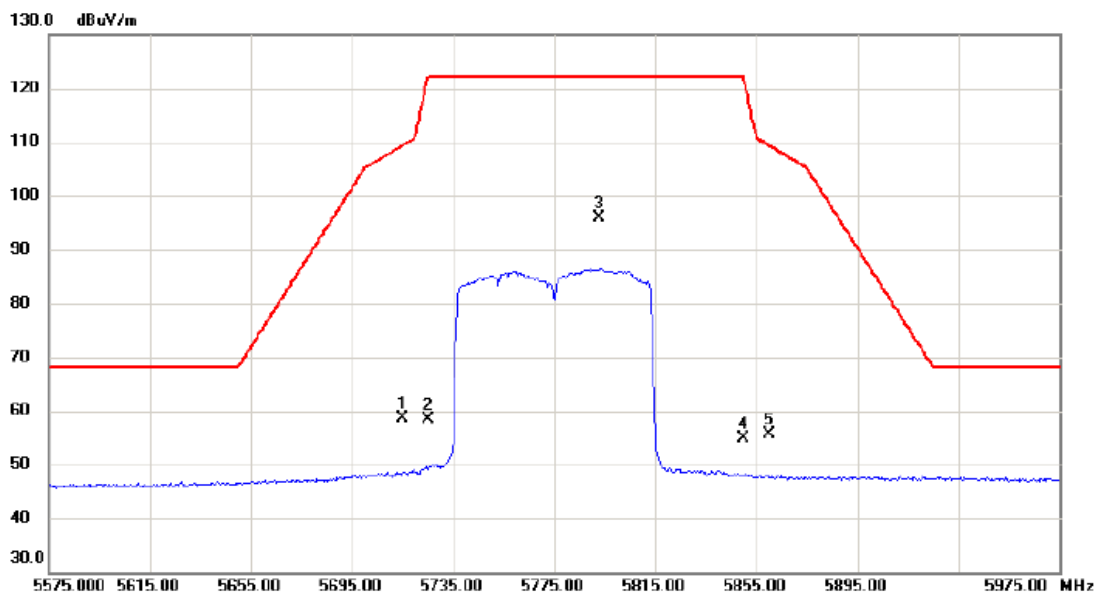

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5715.000	43.36	15.26	58.62	109.40	-50.78	peak	
2		5725.000	43.07	15.27	58.34	122.20	-63.86	peak	
3	*	5792.600	80.61	15.35	95.96	122.20	-26.24	peak	主波訊號不予判定
4		5850.000	39.34	15.43	54.77	122.20	-67.43	peak	
5		5860.000	40.09	15.44	55.53	109.40	-53.87	peak	

測試頻道: IEEE 802.11ax (HE80) /
5775 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢測器: Peak/AV


測試日期: 108/06/26

環境溫度: 24 °C

環境濕度: 52%

Orthogonal Axis: X

Polarization: Horizontal

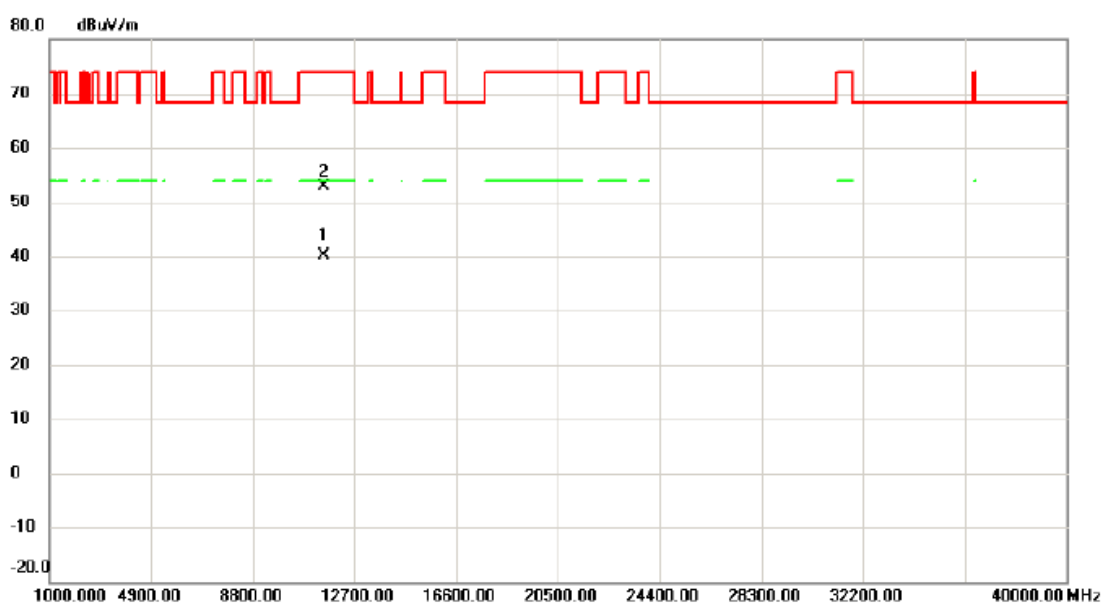

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	11548.030	23.49	16.62	40.11	54.00	-13.89	AVG	
2		11551.340	36.24	16.61	52.85	74.00	-21.15	peak	

測試頻道: IEEE 802.11ax (HE40) / 5755 MHz

測試模式: 接收

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢測器: Peak/AV


測試日期: 108/06/22

環境溫度: 24 °C

環境濕度: 52%

Orthogonal Axis: X

Polarization: Vertical

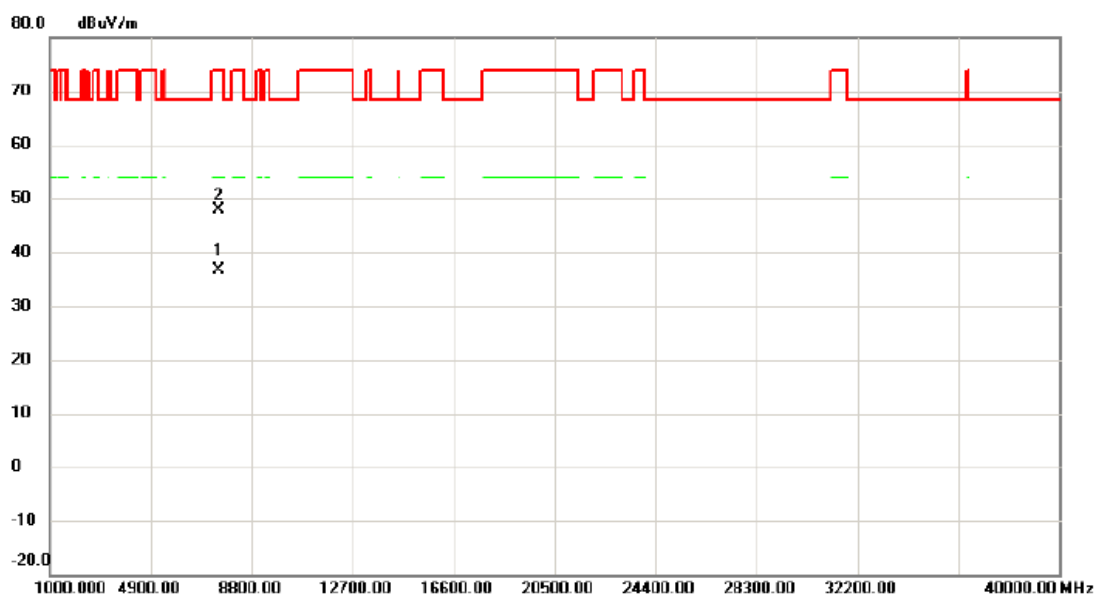

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	7536.590	26.37	10.21	36.58	54.00	-17.42	AVG	
2		7537.160	37.61	10.21	47.82	74.00	-26.18	peak	

測試頻道: IEEE 802.11ax (HE40) / 5755 MHz

測試模式: 接收

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna


測試距離: 3 米

檢測器: Peak/AV

測試日期: 108/06/22

環境溫度: 24 °C

環境濕度: 52%

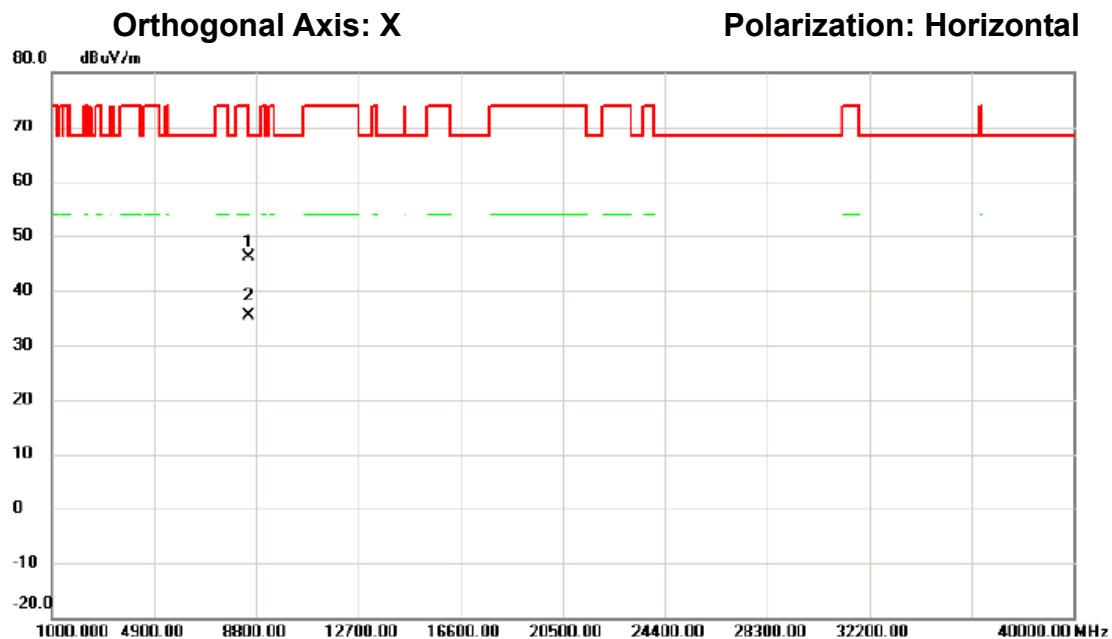

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	8526.390	35.74	10.48	46.22	68.30	-22.08	peak	
2		8529.410	24.95	10.48	35.43	68.30	-32.87	AVG	