TEST REPORT

Report No.:	BCTC2512673858-1E
Applicant:	Shanghai ABXY Technology Co., Ltd.
Product Name:	Game Controller
Test Model:	M4
Tested Date:	2025-12-17 to 2026-01-08
Issued Date:	2026-01-30

Shenzhen BCTC Technology Co., Ltd.

Product Name:	Game Controller
Trademark:	NA
Model/Type reference:	M4,M1,M2,M3,M5,M6,M7,M8,M9,N1,N2,N3,N4,N5,N6,N7,N8,N9
Prepared For:	Shanghai ABXY Technology Co., Ltd.
Address:	Building 1, 245 Jiachuan Road, Xuhui District, Shanghai
Manufacturer:	Shanghai ABXY Technology Co., Ltd.
Address:	Building 1, 245 Jiachuan Road, Xuhui District, Shanghai
Prepared By:	Shenzhen BCTC Technology Co., Ltd.
Address:	Room 101M, Unit 1, Building1, Pengyuan, No.18, Lilang Road, Shanglilang, Nanwan Subdistrict, Longgang District, Shenzhen, Guangdong, China
Sample Received Date:	2025-12-17
Sample tested Date:	2025-12-17 to 2026-01-08
Report No.:	BCTC2512673858-1E
Test Standards	Article 2 paragraph 1 of item 19
Test Results	PASS
Remark:	This is JAPAN RADIO test report.

Tested by:

Mike Zheng/ Project Handler

Approved by:

Sewen Guo/Reviewer

The test report is effective only with both signature and specialized stamp. This result(s) shown in this report refer only to the sample(s) tested. Without written approval of Shenzhen BCTC Technology Co., Ltd, this report can't be reproduced except in full. The tested sample(s) and the sample information are provided by the client.

Table Of Content

Test Report Declaration Page
1. Version 5
2. Test Summary 6
3. Measurement Uncertainty 7
4. Product Information And Test Setup 8
4.1 Product Information 8
4.2 Block Digram Parameters Of Text Software Setting 9
4.3 Description Of Support Units (Conducted Mode) 9
4.4 Channel List 9
4.5 Test Mode 9
4.6 Test Conditions 10
4.7 Table Of Parameters Of Test Software Setting 10
5. Test Facility And Test Instrument Used 11
5.1 Test Facility 11
5.2 Test Instrument Used 11
6. RF Shielding Method 12
7. Frequency Error 13
7.1 Block Diagram Of Test Setup 13
7.2 Limit 13
7.3 Measuring Instruments And Setting 13
7.4 Test procedure 13
7.5 Test Result 14
8. Antenna Power 16
8.1 Block Diagram Of Test Setup 16
8.2 Limit 16
8.3 Test procedure 16
8.4 Test Result 17
9. Occupied Bandwidth 18
9.1 Block Diagram Of Test Setup 18
9.2 Limit 18
9.3 Test procedure 18
9.4 Test Result 19
10. Unwanted Emission Intensity Measurement 22
10.1 Block Diagram Of Test Setup 22
10.2 Limit 22
10.3 Measuring Instruments And Setting 22
10.4 Test procedure 22
10.5 Test Result 23
11. Imitation Of Collateral Emission Of Receiver Measurement 32
11.1 Block Diagram Of Test Setup 32
11.2 Limit 32
11.3 Measuring Instruments And Setting 32
11.4 Test procedure 32
11.5 Test Result 33
12. Transmission Antenna Gain (Eirp Antenna Power) Measurement 37
12.1 Block Diagram Of Test Setup 37
12.2 Limit 37

12.3 Measuring Instruments And Setting 38
12.4 Test procedure 38
12.5 Test Result 38
13. Transmission Radiation Angle Width (3db Beamwidth) Measurement 39
13.1 Block Diagram Of Test Setup 39
13.2 Limit 39
13.3 Measuring Instruments And Setting 39
13.4 Test procedure 40
13.5 Test Result 40
14. Radio Interference Prevention Capability Measurement 41
14.1 Block Diagram Of Test Setup 41
14.2 Limit 41
14.3 Measuring Instruments And Setting 41
14.4 Test procedure 41
14.5 Test Result 41
15. EUT Test Setup Photographs 42

1. Version

Report No.	Issue Date	Description	Approved
BCTC2512673858-1E	2026-01-30	Original	Valid

2. Test Summary

Test procedures according to the technical standards:

Article 2 paragraph 1 of item 19	
Description of Test	**Result**
Frequency Error	Complies
Occupied Bandwidth (99%) and Spread-spectrum Bandwidth (90%)	Complies
Unwanted Emission Intensity	Complies
Antenna Power Error	Complies
Limitation of Collateral Emission of Receiver	Complies
Transmission Antenna Gain (EIRP Antenna Power)	Complies
Transmission Radiation Angle Width (3dB Beamwidth)	N/A
Radio Interference Prevention Capability	Complies
Construction Protection Confirmation	Complies

NOTE:

(1)" N/A" denotes test is not applicable in this Test Report

3. Measurement Uncertainty

The reported uncertainty of measurement y ± U, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of k=2, providing a level of confidence of approximately 95 %.

No.	Item	Uncertainty
1	Conducted Emission Test	±3.2dB
2	Radiated Emission Test	±4.7dB
3	RF power,conducted	±0.16dB
4	Spurious emissions,conducted	±0.21dB
5	All emissions,radiated(<1G)	±4.68dB
6	All emissions,radiated(>1G)	±5.0dB
7	frequency error ppm	±0.5ppm

4. Product Information And Test Setup

4.1 Product Information

Model/Type reference:	M4,M1,M2,M3,M5,M6,M7,M8,M9,N1,N2,N3,N4,N5,N6,N7,N8,N9
Model differences:	The following models of units we produce are identical in electrical, mechanical and physical structure; The difference lies in appearance color, shape size, and model name, we finally have M4 as test model.
Hardware Version:	N/A
Software Version:	N/A
Operation Frequency:	2402-2480MHz
Type of Modulation:	GFSK,1Mbps
Number Of Channel:	40 Channels for Bluetooth DTS;
Transmit Power Max:	1mW
Antenna installation:	Internal antenna
Antenna Gain:	1.89dBi
Remark:	The antenna gain of the product comes from the antenna report provided by the customer, and the test data is affected by the customer information.
power supply:	DC 3.7V
Battery:	DC 3.7V,300mAh

4.2 Block Digram Parameters Of Text Software Setting



4.3 Description Of Support Units (Conducted Mode)

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Note
E-1	Game Controller	N/A	M4	N/A	EUT

Notes:

1. The support equipment was authorized by Declaration of Confirmation.

2. For detachable type I/O cable should be specified the length in cm in 『Length』 column

3. "YES" is means "shielded" "with core"; "NO" is means "unshielded" "without core".

4.4 Channel List

Channel List					
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
01	2402	11	2422	21	2442
02	2404	12	2424	22	2444
03	2406	13	2426	23	2446
~	~	~	~	~	~
09	2418	19	2438	39	2478
10	2420	20	2440	40	2480

4.5 Test Mode

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

For All Mode	Description	Modulation Type
Mode 1	CH01	GFSK,1Mbps
Mode 2	CH20	
Mode 3	CH40	
Mode 4	RX	GFSK,1Mbps

4.6 Test Conditions

The BLE module was tested while in a continuous transmitter/receiver mode.

The EUT was tuned to a low, middle, and high channel for all tests. For all test case pre/scans were completed in all Modes to determine worst case levels.

Power Supply Voltage Fluctuation Test

Voltage Fluctuation Test	Normal Voltage	High Voltage +10% of Normal Voltage	Low Voltage -10% of Normal Voltage
Input DC Power	DC 3.7V	DC 4.07V	DC 3.33V
Voltage Variation (%)	0%	+10%	-10%

Note:
Voltage Variation (%) = (Output high or Low Voltage - Output Normal Voltage)/ Output Normal Voltage* 100

During the input supply voltage to the EUT from the external power source is varied by +/-10%,+/-10% of the external power change, will not affect the voltage of the RF, so only operated in normal voltage to test all regulations.

4.7 Table Of Parameters Of Test Software Setting

During testing channel & power controlling software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product power parameters

Test software Version	bt_tool_v1.1.0		
Frequency	2402 MHz	2440 MHz	2480 MHz
Parameters	DEF	DEF	DEF

5. Test Facility And Test Instrument Used

5.1 Test Facility

All measurement facilities used to collect the measurement data are located at Shenzhen BCTC Technology Co., Ltd. Address: Room 101M, Unit 1, Building1, Pengyuan, No.18, Lilang Road, Shanglilang, Nanwan Subdistrict, Longgang District, Shenzhen, Guangdong, China. The site and apparatus are constructed in conformance with the requirements of ANSI C63.4 and CISPR 16-1-1 other equivalent standards.

5.2 Test Instrument Used

RF Conducted Test					
Equipment	**Manufacturer**	**Model#**	**Serial#**	**Last Cal.**	**Next Cal.**
Spectrum Analyzer	Keysight	N9020A	MY51287403	Aug.30, 2025	Aug.29, 2026
Signal Generator	Keysight	N5182A	MY50144088	Aug.30, 2025	Aug.29, 2026
Power Sensor	MWRFtest	MW100-RFCB	\	Aug.30, 2025	Aug.29, 2026
Radio frequency control box	MWRFtest	MW100-RFCB	\	\	\
Software	Frad	EZ-EMC	FA-03A2 RE	\	\
Software	Keysight	Keysight.ETSL Test system	1.02.05	\	\
D.C. Power Supply	LongWei	D-41747 Viersen	6230316	Aug.30, 2025	Aug.29, 2026
Communication test set	R&S	CMW500	157483	Aug.30, 2025	Aug.29, 2026
Programmable constant temperature and humidity test chamber	Auchno	OJN-9606-408 L	19120183	Jul.9, 2025	Jul.8, 2026
Thermometer	HTC	HTC-1	\	Sep.4, 2024	Aug.31, 2026

Calibration laboratory: CCIC(Shenzhen) Co., Ltd

6. RF Shielding Method

Enclosure:

As shown in the figure above, the structure of this product is fixed by welding, and its outer shell needs to be protected by a metal shielding cover. If the outer shell is opened, the product will be damaged.

terminal number is 40. Pitch is 0.80mm.

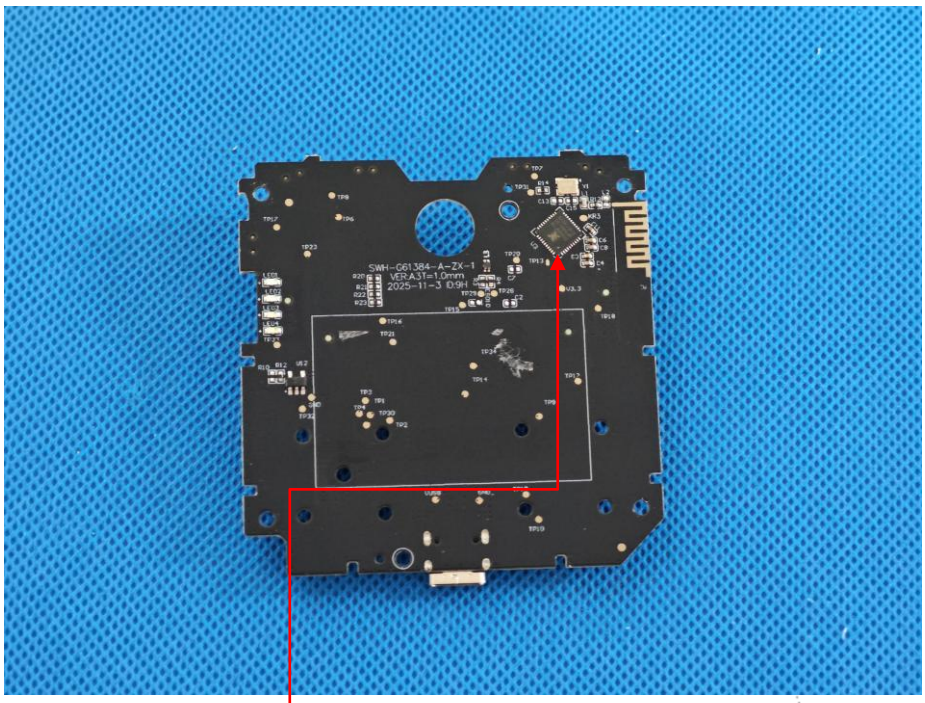

Protective containment soldering

7. Frequency Error

7.1 Block Diagram Of Test Setup



7.2 Limit

Item	Limits
Frequency Error	±50ppm

7.3 Measuring Instruments And Setting

The following table is the setting of Spectrum Analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
RB / VB	10KHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

7.4 Test procedure

(1) In the case of unmodulated signal (continuous or continuous burst), measure the frequency directly by a frequency meter.

(2) In the case of burst waves, the measurement shall be done for enough time in order to obtain the enough measuring accuracy, and the average of the measured values becomes the final value.

(3) In the case of a test mode with a specific frequency spectrum, measure the frequency of the specific spectrum by a spectrum analyzer.

(4) In the cases above, if the frequency equivalent to the test frequency is not directly measured in principle, it shall be obtained by necessary calculation.
In the case of modulated signal, if there is no specific spectrum measurable by a spectrum analyzer but a specific dip is observed, it is allowed to measure the frequency with the signal generator (synthesized). That is, observe a signal of the signal generator concurrently (or alternately) with the tested signal using the spectrum analyzer while setting the frequency of the signal generator to the

position of the dip on the screen of the spectrum analyzer, and determine the frequency of the signal generator at the time as a measured value.

7.5 Test Result

Temperature:	26^{0}C		
Humidity:	54 % RH	Test Voltage	DC 3.7V

Operation Mode:	**Transmitting- unmodulation mode**

Voltage	Frequency	Reading	Tolerance	Limit
Normal Voltage	MHz	MHz	ppm	(ppm)
	2402	2402.005	2.08	±50
	2440	2440.005	2.05	±50
	2480	2480.004	1.61	±50

Normal Voltage:

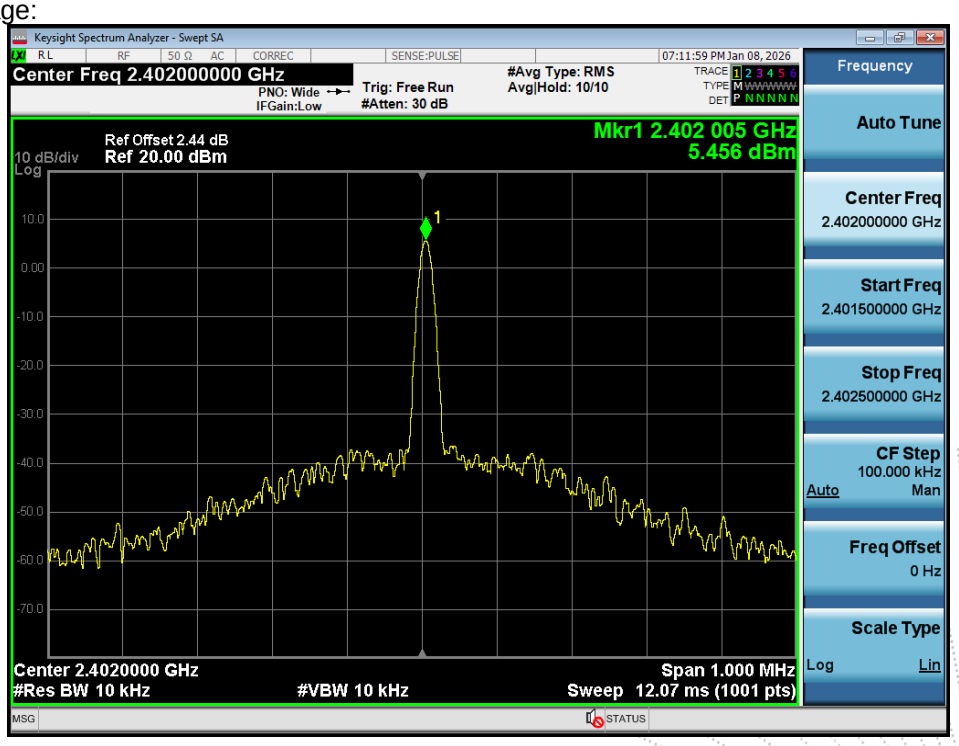

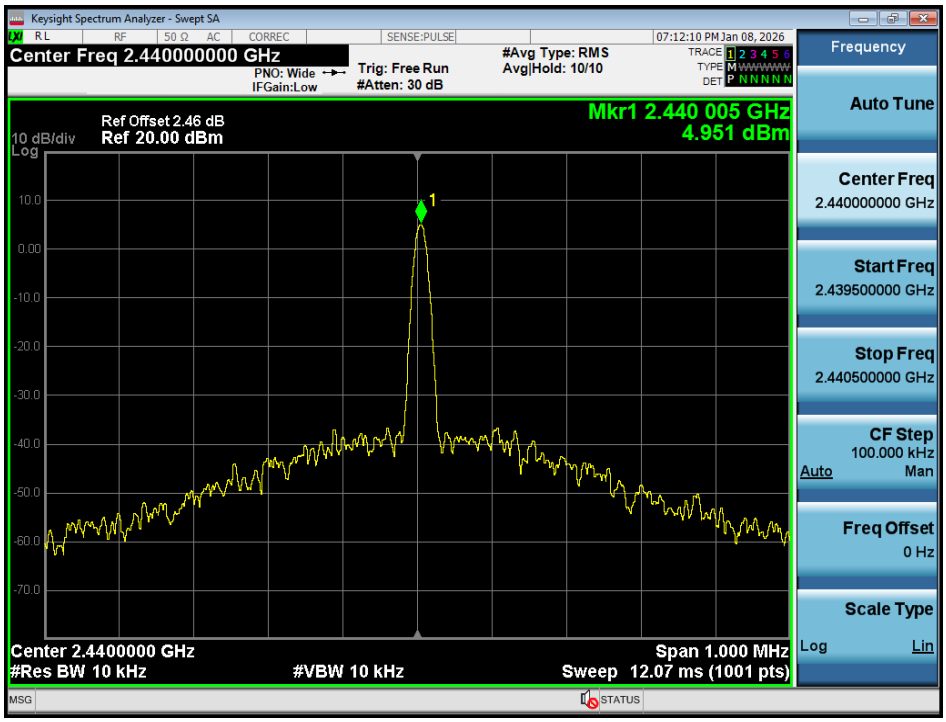
Keysight Spectrum Analyzer - Swept SA
Center Freq 2.440000000 GHz
PNO: Wide
IFGain:Low
Trig: Free Run
#Atten: 30 dB
#Avg Type: RMS
Avg|Hold: 10/10
07:12:10 PM Jan 08, 2026
Ref Offset 2.46 dB
10 dB/div
Ref 20.00 dBm
Mkr1 2.440 005 GHz
4.951 dBm
Center 2.4400000 GHz
#Res BW 10 kHz
#VBW 10 kHz
Span 1.000 MHz
Sweep 12.07 ms (1001 pts)
Frequency
Auto Tune
Center Freq
2.440000000 GHz
Start Freq
2.439500000 GHz
Stop Freq
2.440500000 GHz
CF Step
100.000 kHz
Auto
Man
Freq Offset
0 Hz
Scale Type
Log
Lin

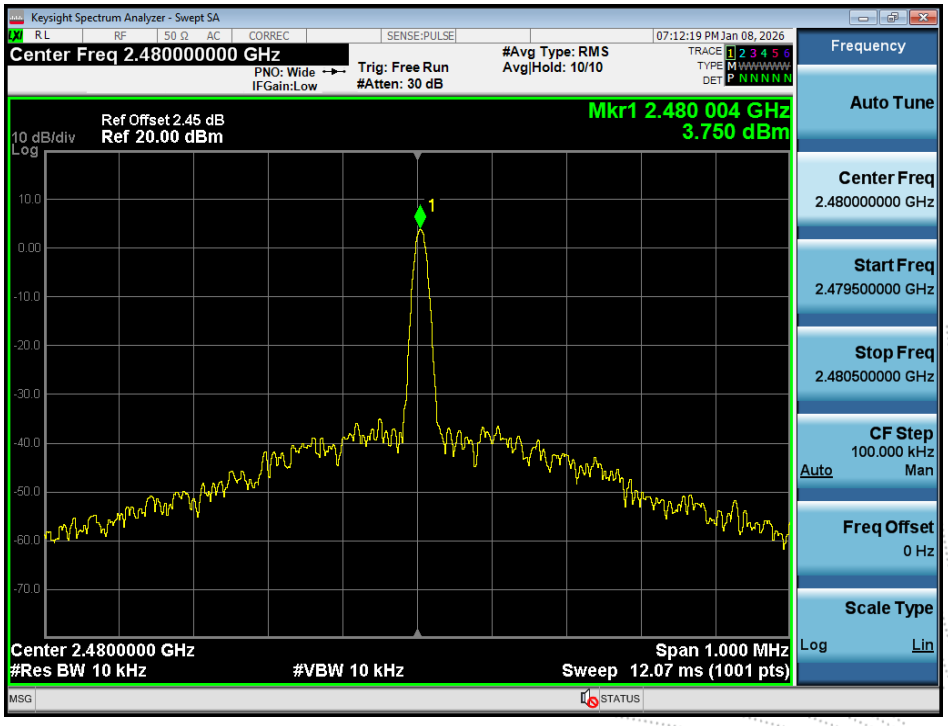
Keysight Spectrum Analyzer - Swept SA
Center Freq 2.480000000 GHz
PNO: Wide
IFGain:Low
Trig: Free Run
#Atten: 30 dB
#Avg Type: RMS
Avg|Hold: 10/10
07:12:19 PM Jan 08, 2026
Ref Offset 2.45 dB
10 dB/div
Ref 20.00 dBm
Mkr1 2.480 004 GHz
3.750 dBm
Center 2.4800000 GHz
#Res BW 10 kHz
#VBW 10 kHz
Span 1.000 MHz
Sweep 12.07 ms (1001 pts)
Frequency
Auto Tune
Center Freq
2.480000000 GHz
Start Freq
2.479500000 GHz
Stop Freq
2.480500000 GHz
CF Step
100.000 kHz
Auto
Man
Freq Offset
0 Hz
Scale Type
Log
Lin

8. Antenna Power

8.1 Block Diagram Of Test Setup

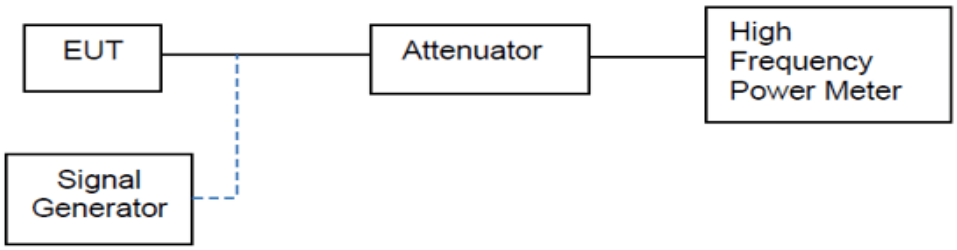

8.2 Limit

Item	Limits
Antenna Power Density	(1)≦3mW/MHz (FH,FH+DS,FH+OFDM form 2400 - 2483.5 MHz) (2)≦10mW/MHz (OFDM OBW < 26MHz, DS, FH other than (1)) (3)≦5mW (OFDM OBW 26-38MHz) (4) ≦10mW (Other than (1) & (2)& (3)
Antenna Power Error	+20% (Base on manufacturer declare antenna power density)

8.3 Test procedure

1: Measure the total power by Power Meter in a state of hopping mode or non-hopping mode (with Average Sensor)
2: If it's the burst wave, please measure the burst ratio. Then calculate the real total power by burst ratio.
3: Calculate the mean power.
Output Power Density (mW) = Total Output Power (mW) / Duty cycle

8.4 Test Result

Temperature:	26^{0}C		
Humidity:	54 % RH	Test Voltage	DC 3.7V

	Voltage		Test Frequency	Antenna Power (dBm)	Antenna Power (mW)	Rated output power (mW)	Antenna Power Error (%)	Limit
GFSK 1M	Normal Voltage	DC 3.7V	CH 01	0.49	1.119	1	11.94	10mW
			CH 20	0.45	1.109		10.92	
			CH 40	-0.57	0.877		-12.30	
	Limit : +20% (Base on manufacturer declare antenna power density)							

9. Occupied Bandwidth

9.1 Block Diagram Of Test Setup



9.2 Limit

Item	Limits
Occupied Band Width:	FH 83.5MHz; OFDM,DS ≤26MHz;Others≤26MHz

9.3 Test procedure

1. Setting of SA is following as: RB: 300kHz / VB:300kHz / SPAN: 3MHz / AT: 20dB Ref: 10dBm / Sweep time: Auto / Sweep Mode: Continuous sweep / Detect mode: Positive peak / Trace mode: Max hold
2 . EUT have transmitted the maximum modulation signal and fixed channelize (For DSSS or OFDM Device) or continuous maximum power of hopping mode(For FHSS Device).
SA set to 99% of occupied bandwidth to measure occupied bandwidth. The limit is less than 26MHz (For DSSS or OFDM Device) or 83.5MHz (For FHSS Device).
3. SA set to 90% of occupied bandwidth to measure Spread Spectrum Bandwidth and must greater than 500kHz.
4. Spread Spectrum Factor = Spread Spectrum Bandwidth / modulation rate of EUT.
5. Spread Spectrum Factor limit is greater than 5

9.4 Test Result

Temperature:	26^{0}C		
Humidity:	54 % RH	Test Voltage	DC 3.7V

Voltage	Mode	Normal Voltage	99%Occupied bandwidth MHz	Occupied Bandwidth Limit MHz
Normal Voltage	GFSK (1Mbps)	CH01	1.234	≦26MHz
		CH20	1.231	≦26MHz
		CH40	1.238	≦26MHz

Normal 2402MHz Occupied bandwidth (99%)

Normal 2440MHz Occupied bandwidth (99%)

Normal 2480MHz Occupied bandwidth (99%)

10. Unwanted Emission Intensity Measurement

10.1 Block Diagram Of Test Setup



10.2 Limit

Item	Limits
TX Spurious Emission	≦ 0.25 μW(-36dBm) (30MHz≦f≦1000MHz)
	≦2.5 μW (-26dBm) (1000MHz<f≦2387MHz)
	≦25 μW(-16dBm) (2387MHz<f≦2400MHz)
	≦25 μW (-16dBm) (2483.5MHz≦f<2496.5MHz)
	≦2.5 μW (-26dBm) (2496.5MHz≦f<12500MHz)

10.3 Measuring Instruments And Setting

Please refer to section 5 in this report. The following table is the setting of Spectrum Analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
RB / VB	1 MHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

10.4 Test procedure

1. EUT have transmitted the maximum modulation signal and fixed channelize.
2. Setting of SA is following as: Below 1GHz RB:100KHz / VB:100KHz
Above 1GHz RB:1MHz / VB:1MHz / AT: 20dB Ref: 10dBm / Sweep time: Auto
Sweep Mode: Continuous sweep / Detect mode: Positive peak
Trace mode: Max hold
3. Setting of SA is following as 30MHz and stop frequency 1000MHz Then to mark peak reading value + cable loss shall be less than 0.25μW.
4. Setting of SA is following as 1000MHz and stop frequency 2387MHz Then to mark peak reading value + cable loss shall be less than 2.5μW.
5. SA adjusted to start frequency 2387MHz and stop frequency 2400MHz. Then to mark peak reading value + cable loss shall be less than 25μW.
6. SA adjusted to start frequency 2483.5MHz and stop frequency 2496.5MHz Then to mark peak reading value + cable loss shall be less than 25μW
7. SA adjusted to start frequency 2496.5MHz and stop frequency 12500MHz Then to mark peak reading value + cable loss shall be less than 2.5μW

10.5 Test Result

Temperature:	26^0C		
Humidity:	54% RH	Test Voltage	DC 3.7V
Operation Mode:	GFSK TX ; Normal Voltage		

Mode	Frequency (MHz)	Range (MHz)	Emission Frequency (MHz)	Max Peak Value (dBm)	Max RMS Value (dBm)	Max Peak Value (uW)	Max RMS Value (uW)	Limit Start(uW)	Limit Stop (uW)	Verdict
BLE 1M	2402	30-1000	996.12	-57.91	NA	0.0016	NA	2.5	2.5	Pass
BLE 1M	2402	1000-2387	2377.29	-50.79	NA	0.0083	NA	2.5	2.5	Pass
BLE 1M	2402	2387-2400	2399.79	-32.42	NA	0.5728	NA	25	25	Pass
BLE 1M	2402	2483.5-2496.5	2487.89	-55.64	NA	0.0027	NA	25	25	Pass
BLE 1M	2402	2496.5-13000	9607.37	-49.64	NA	0.0109	NA	2.5	2.5	Pass
BLE 1M	2440	30-1000	961.20	-57.85	NA	0.0016	NA	2.5	2.5	Pass
BLE 1M	2440	1000-2387	2219.17	-55.44	NA	0.0029	NA	2.5	2.5	Pass
BLE 1M	2440	2387-2400	2387.73	-53.63	NA	0.0043	NA	25	25	Pass
BLE 1M	2440	2483.5-2496.5	2492.08	-52.19	NA	0.006	NA	25	25	Pass
BLE 1M	2440	2496.5-13000	9764.92	-48.32	NA	0.0147	NA	2.5	2.5	Pass
BLE 1M	2480	30-1000	778.84	-56.82	NA	0.0021	NA	2.5	2.5	Pass
BLE 1M	2480	1000-2387	2342.62	-54.58	NA	0.0035	NA	2.5	2.5	Pass
BLE 1M	2480	2387-2400	2391.04	-55.89	NA	0.0026	NA	25	25	Pass
BLE 1M	2480	2483.5-2496.5	2483.66	-49.41	NA	0.0115	NA	25	25	Pass
BLE 1M	2480	2496.5-13000	9922.47	-48.85	NA	0.013	NA	2.5	2.5	Pass

Test Graphs

Tx. Spurious NVNT BLE 1M 2402MHz Ant1 @ 30MHz-1000MHz

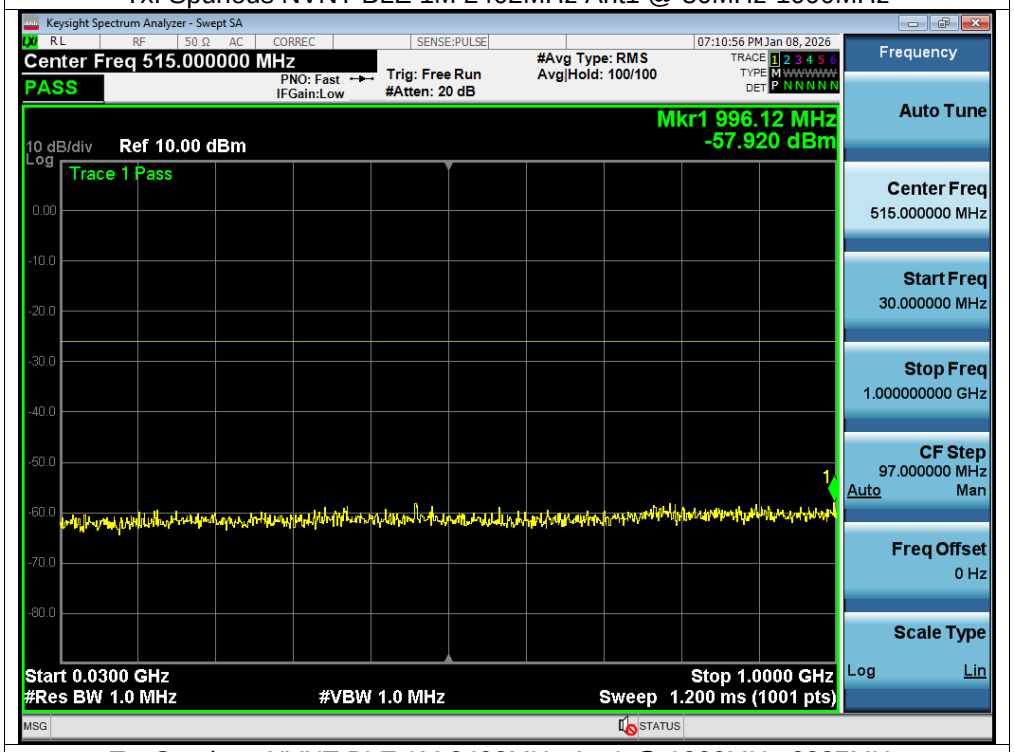

Tx. Spurious NVNT BLE 1M 2402MHz Ant1 @ 1000MHz-2387MHz

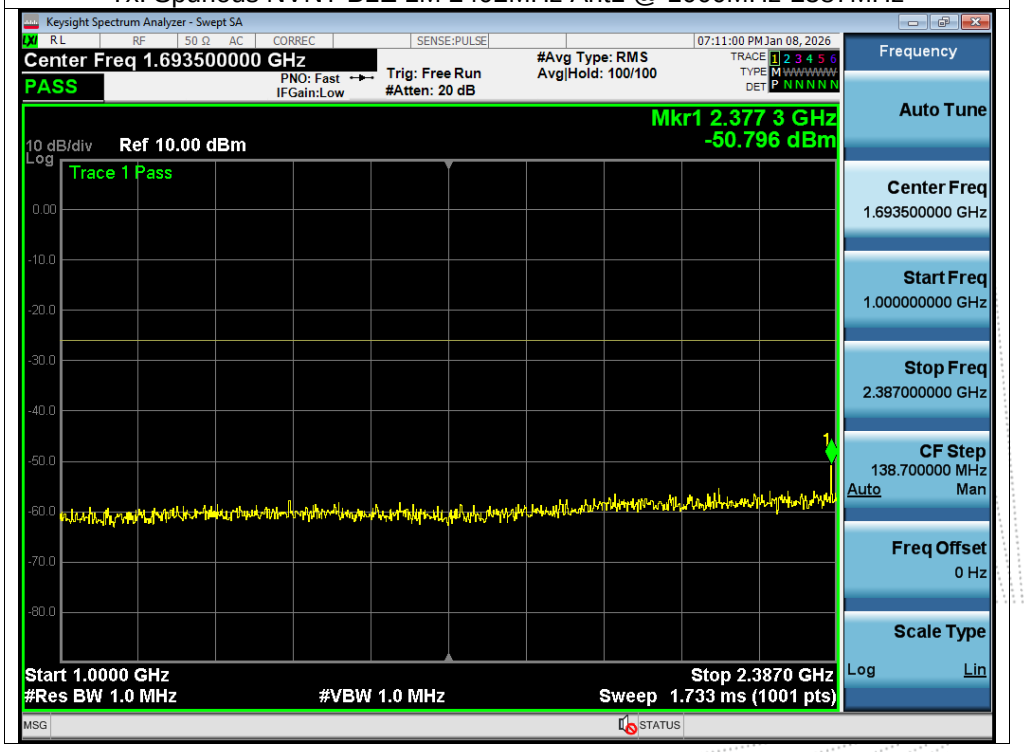

Tx. Spurious NVNT BLE 1M 2402MHz Ant1 @ 2387MHz-2400MHz

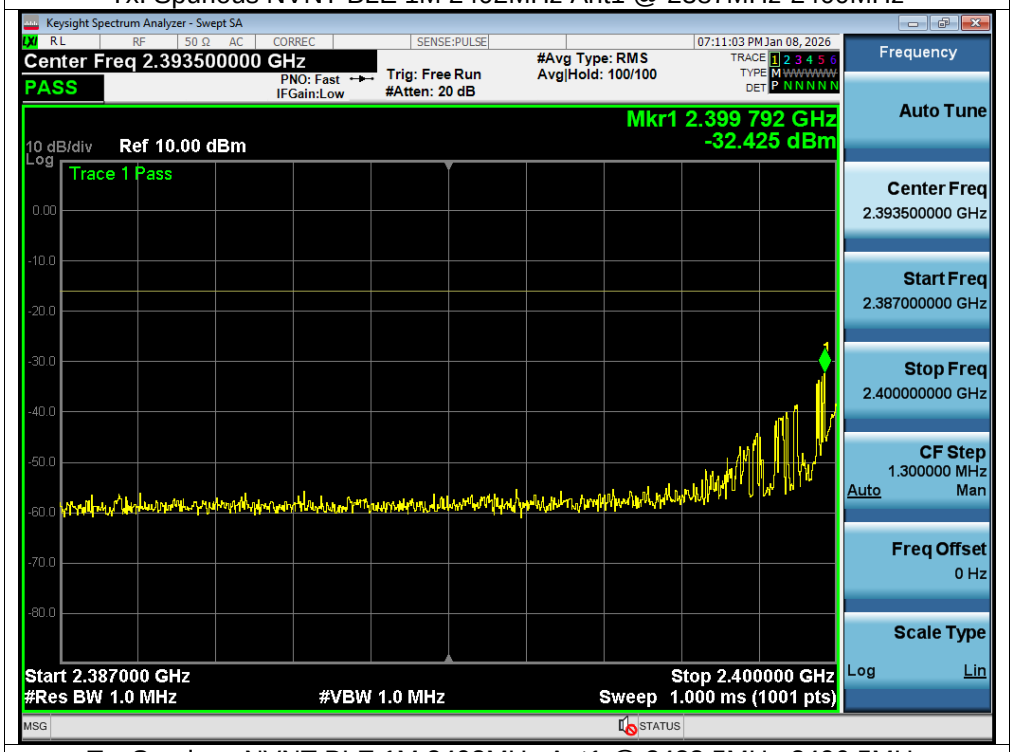

Tx. Spurious NVNT BLE 1M 2402MHz Ant1 @ 2483.5MHz-2496.5MHz

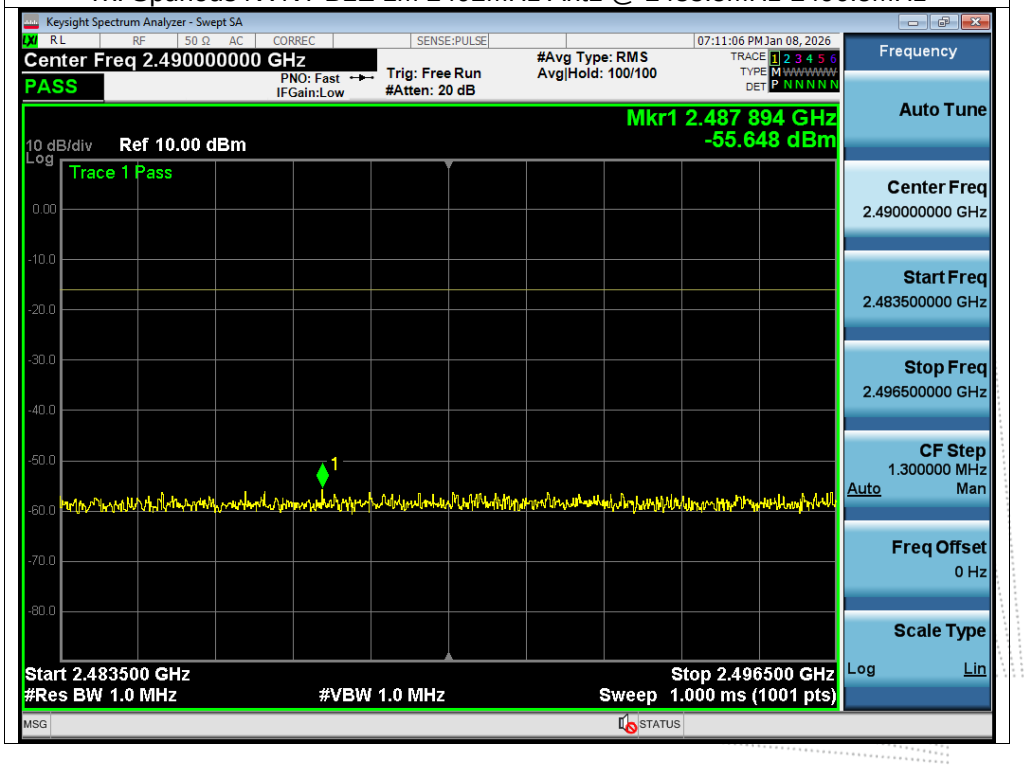

Tx. Spurious NVNT BLE 1M 2402MHz Ant1 @ 2496.5MHz-13000MHz

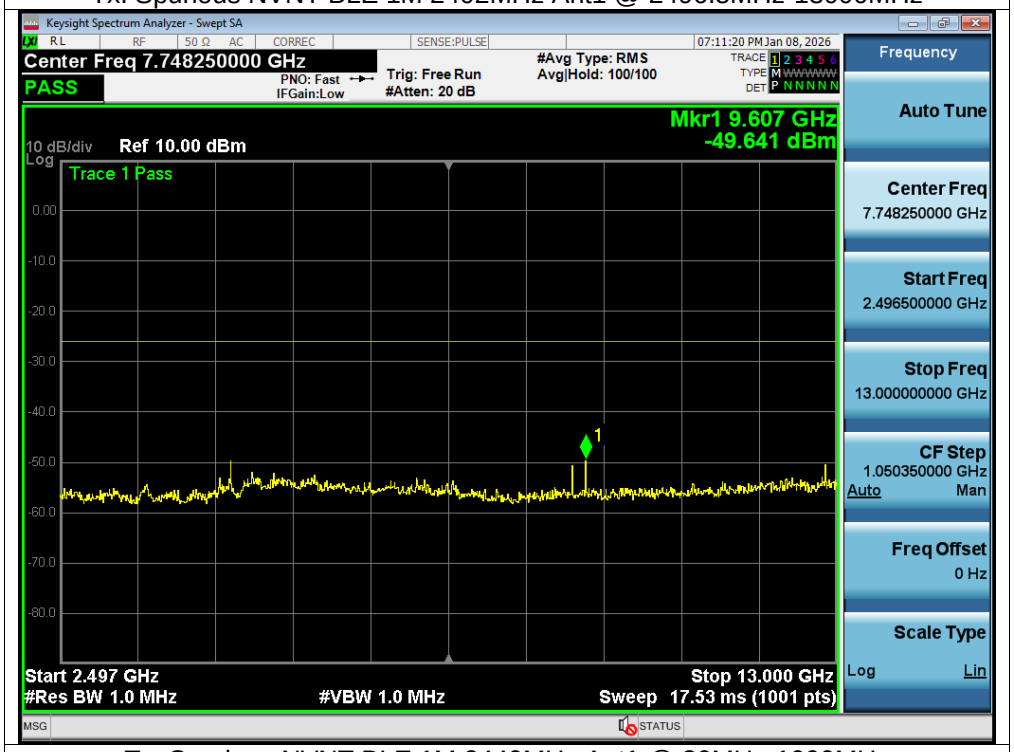

Tx. Spurious NVNT BLE 1M 2440MHz Ant1 @ 30MHz-1000MHz

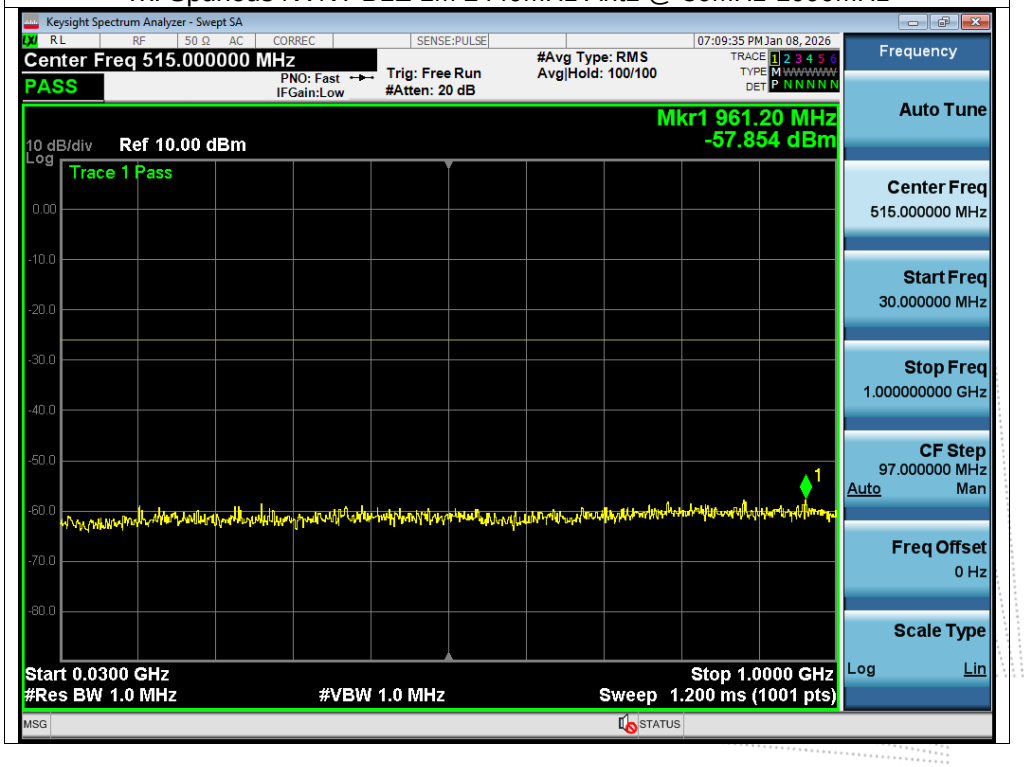

Tx. Spurious NVNT BLE 1M 2440MHz Ant1 @ 1000MHz-2387MHz

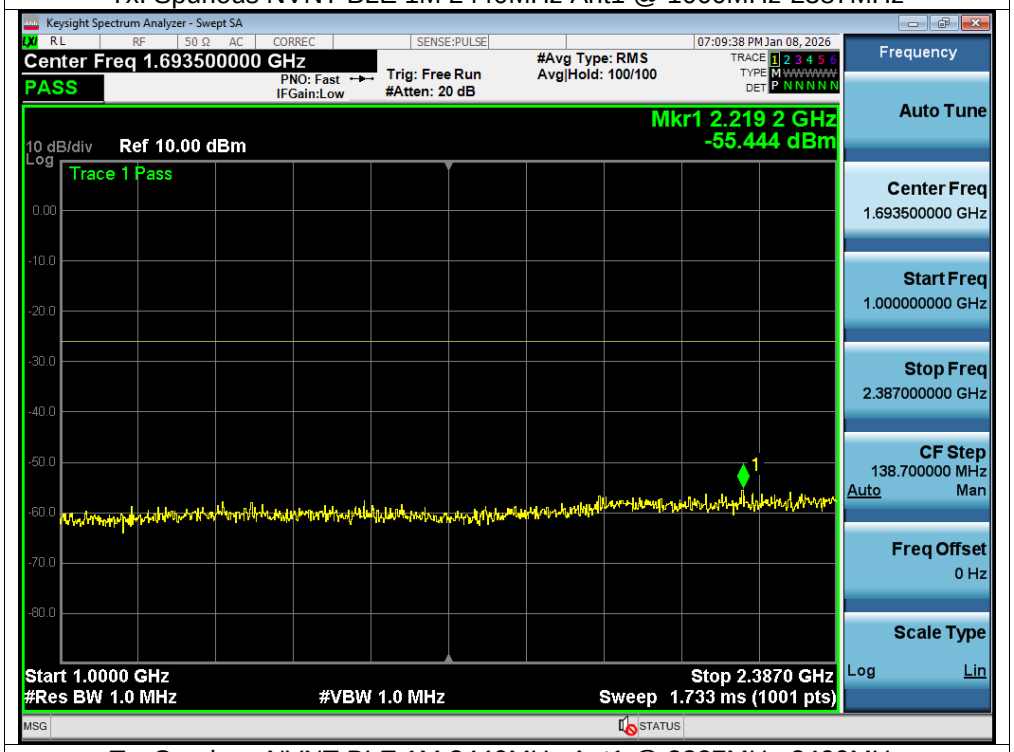

Tx. Spurious NVNT BLE 1M 2440MHz Ant1 @ 2387MHz-2400MHz

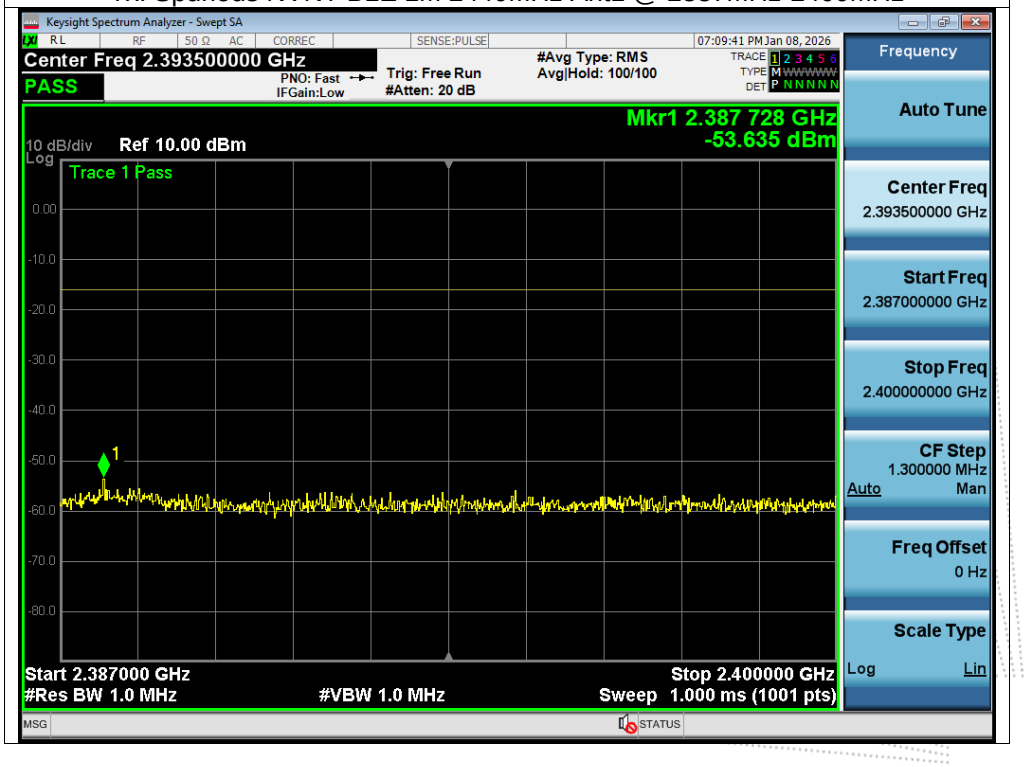

Tx. Spurious NVNT BLE 1M 2440MHz Ant1 @ 2483.5MHz-2496.5MHz

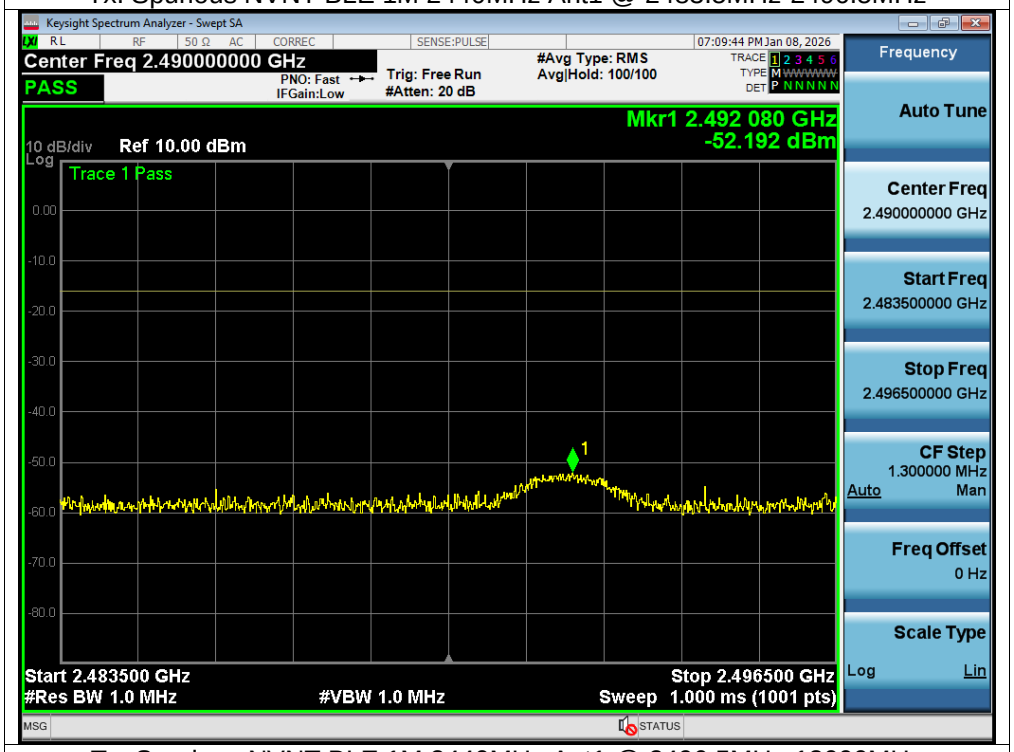

Tx. Spurious NVNT BLE 1M 2440MHz Ant1 @ 2496.5MHz-13000MHz

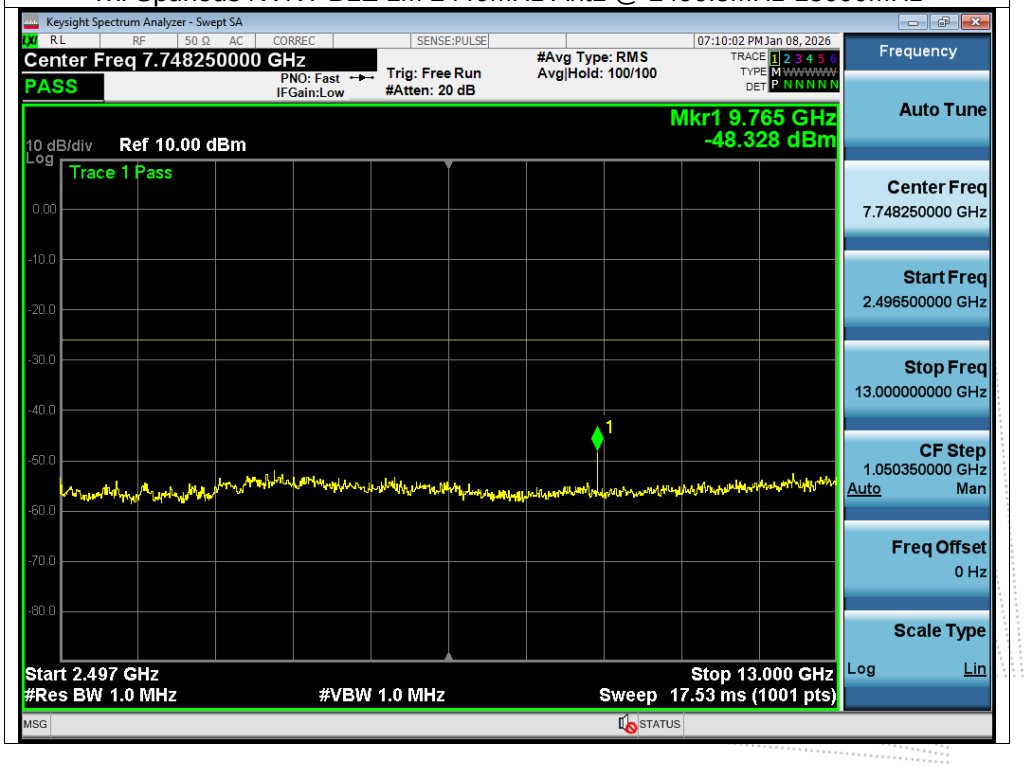

Tx. Spurious NVNT BLE 1M 2480MHz Ant1 @ 30MHz-1000MHz

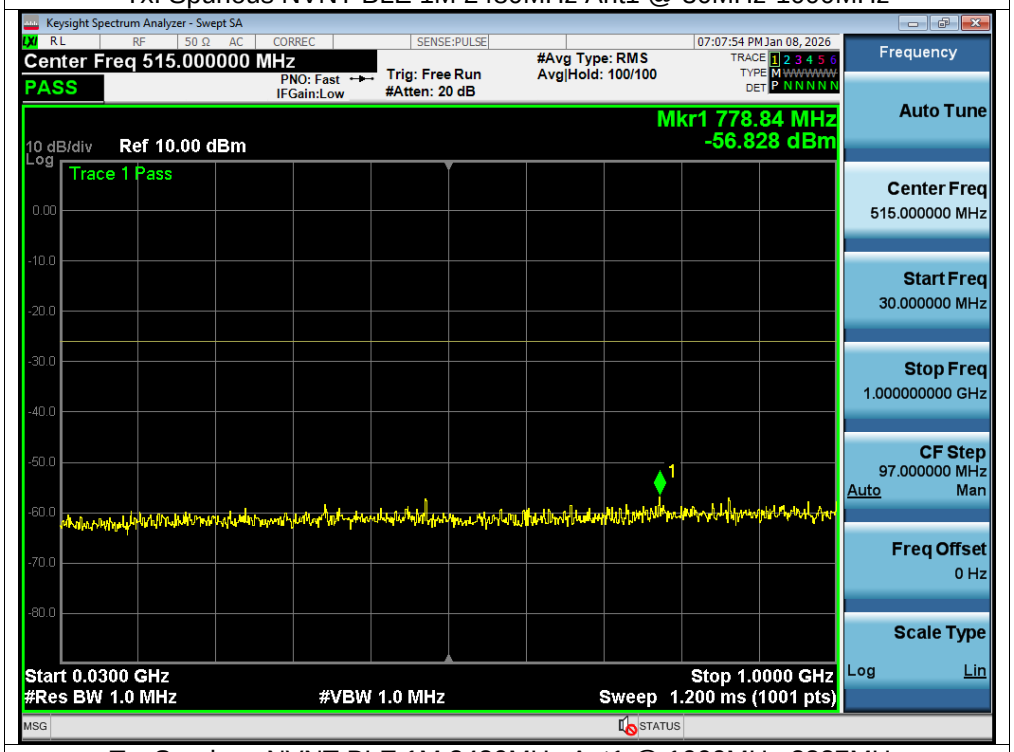

Tx. Spurious NVNT BLE 1M 2480MHz Ant1 @ 1000MHz-2387MHz

Tx. Spurious NVNT BLE 1M 2480MHz Ant1 @ 2387MHz-2400MHz

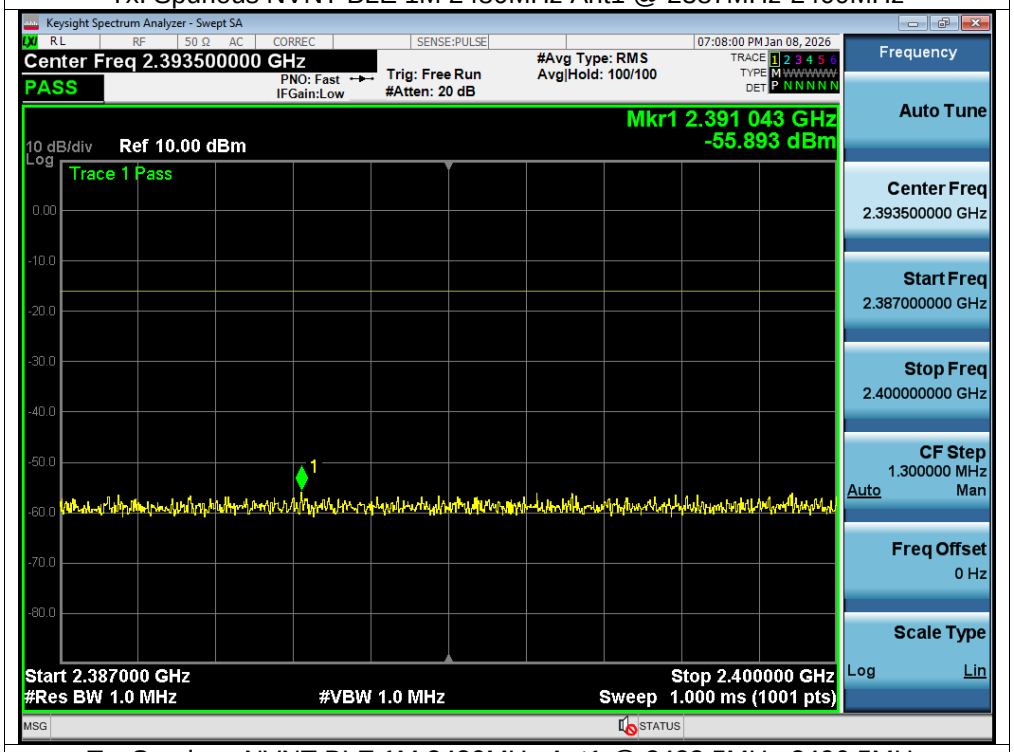

Tx. Spurious NVNT BLE 1M 2480MHz Ant1 @ 2483.5MHz-2496.5MHz

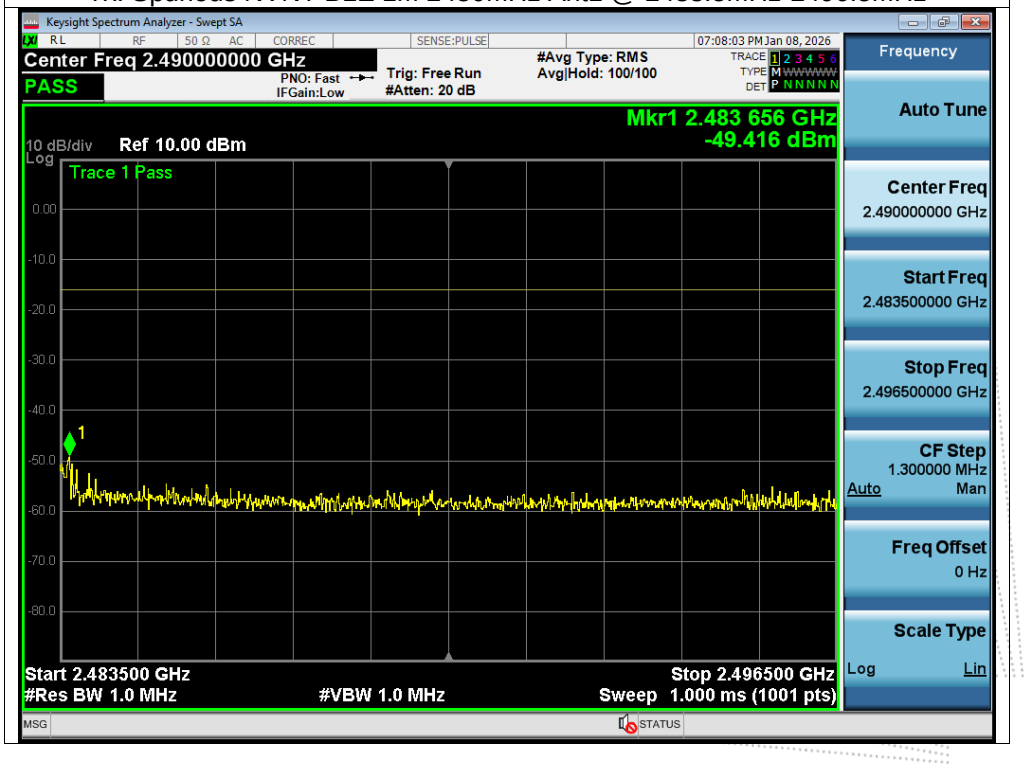

Tx. Spurious NVNT BLE 1M 2480MHz Ant1 @ 2496.5MHz-13000MHz

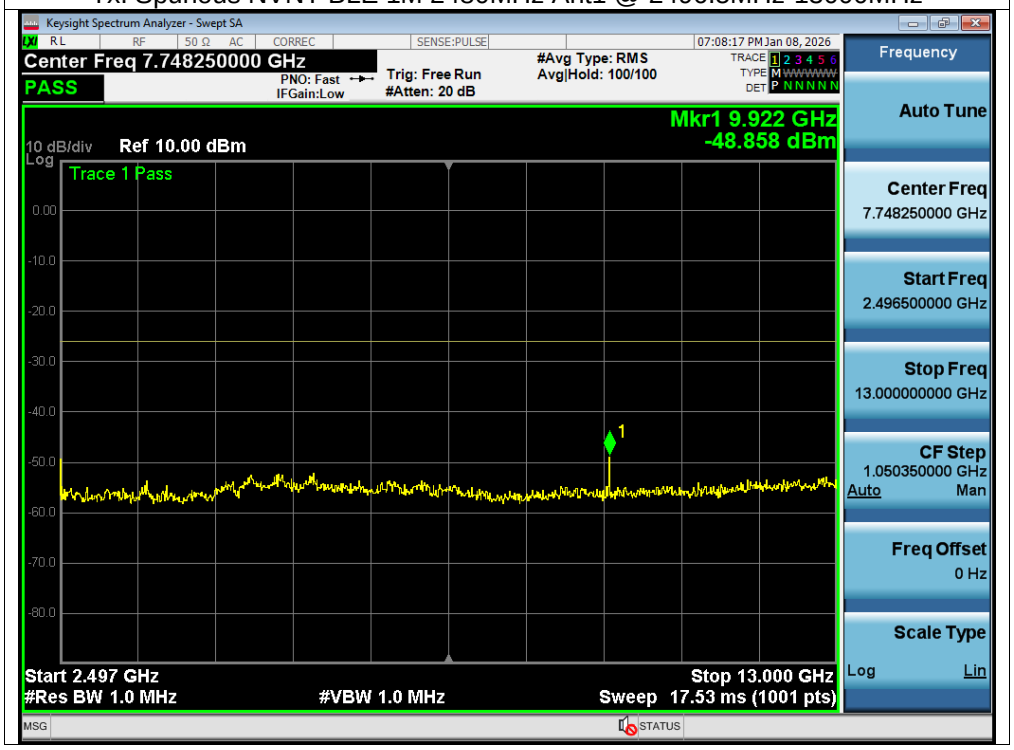

11. Imitation Of Collateral Emission Of Receiver Measurement

11.1 Block Diagram Of Test Setup



11.2 Limit

Item	Limits
RX Spurious Emission:	≦4nW (f<1GHz)
	≦20nW (1GHz≦f)

11.3 Measuring Instruments And Setting

Please refer to section 5 in this report. The following table is the setting of Spectrum Analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
RB	100 kHz (below 1GHz emissions) 1 MHz (above 1GHz emissions)
VB	100 kHz (below 1GHz emissions) 1 MHz (above 1GHz emissions)
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

11.4 Test procedure

1. EUT have the continuous reception mode and fixed only one channelize.
2. Setting of SA is following as RB / VB: 100 kHz (below 1GHz emissions) / 1 MHz (above 1GHz emissions) /AT: 6dB / Ref: -20dBm / Sweep time: Auto / Sweep Mode: Continuous sweep / Detect mode: Positive peak / Trace mode: Max hold
3. SA set RB: 100kHz and VB: 100kHz. Then adjust to start frequency 30MHz and stop frequency 1000MHz. Search to mark peak reading value + cable loss shall be less than 4nW
4. SA set RB: 1MHz and VB: 1MHz. Then adjust to start frequency 1000MHz and stop frequency 12500MHz. Search to mark peak reading value + cable loss shall be less than 20nW
5. If power level of lower emissions are more than 1/10 of limit (.0.4nW for f < 1GHz, 2nW for f >= 1GHz), all those are to be indicated in the 2nd and 3rd lines. If others are 1/10 or less more of the limit, no necessary to be indicated.

11.5 Test Result

Temperature:	26^{0}C		
Humidity:	54% RH	Test Voltage	DC 3.7V
Operation Mode:	GFSK Normal Voltage		

Mode	Frequency (MHz)	Range (MHz)	Emission Frequency (MHz)	Max Peak Value (dBm)	Max RMS Value (dBm)	Max Peak Value (nW)	Max RMS Value (nW)	Limit (nW)	Verdict
BLE 1M	2402	30-1000	942.77	-87.82	NA	0.0017	NA	4	Pass
BLE 1M	2402	1000-13000	12916.00	-73.06	NA	0.0494	NA	20	Pass
BLE 1M	2440	30-1000	903.97	-87.15	NA	0.0019	NA	4	Pass
BLE 1M	2440	1000-13000	5860.00	-73.33	NA	0.0465	NA	20	Pass
BLE 1M	2480	30-1000	769.14	-87.72	NA	0.0017	NA	4	Pass
BLE 1M	2480	1000-13000	12364.00	-72.74	NA	0.0532	NA	20	Pass

Test Graphs

Rx. Spurious NVNT BLE 1M 2402MHz Ant1 @ 30MHz-1000MHz

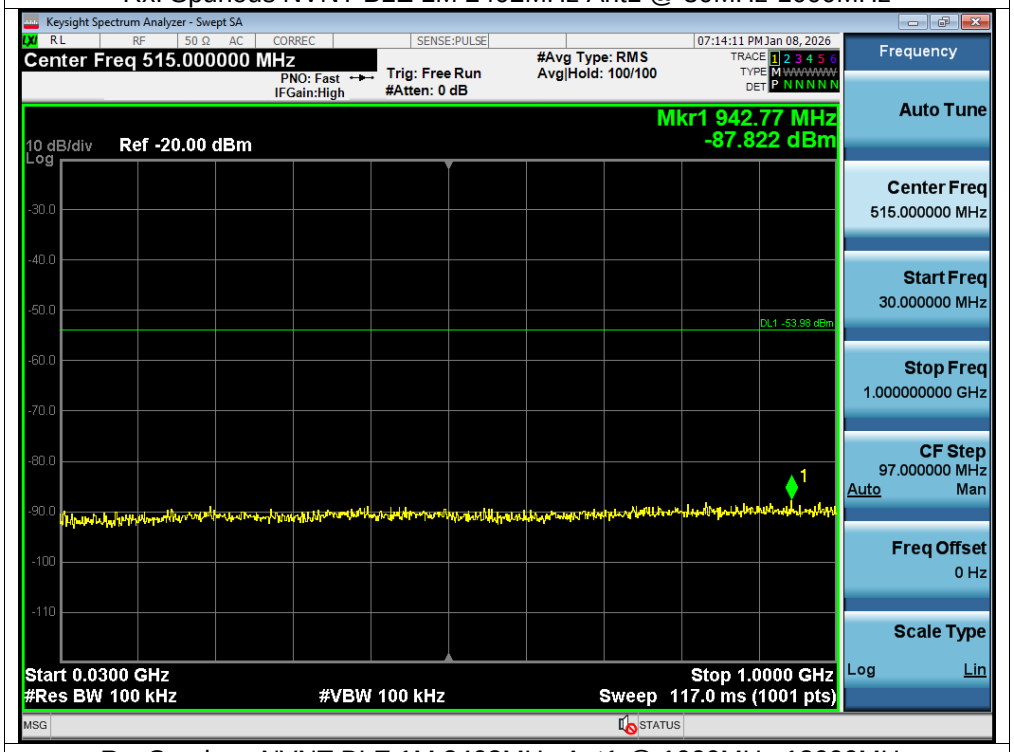

Rx. Spurious NVNT BLE 1M 2402MHz Ant1 @ 1000MHz-13000MHz

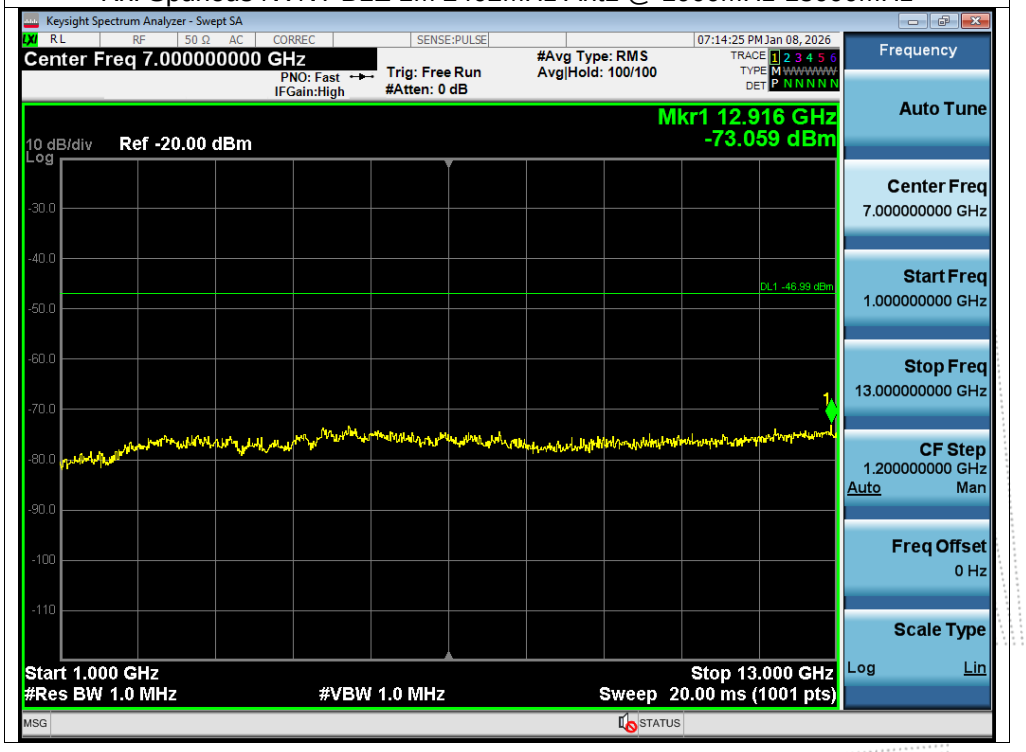

Rx. Spurious NVNT BLE 1M 2440MHz Ant1 @ 30MHz-1000MHz

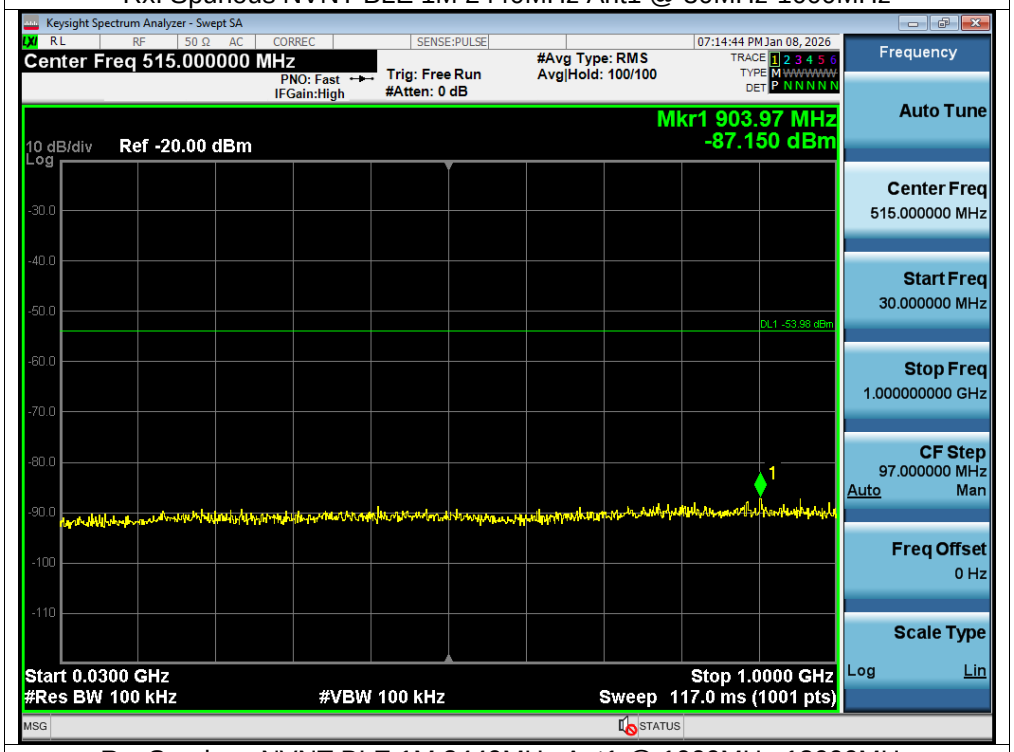

Rx. Spurious NVNT BLE 1M 2440MHz Ant1 @ 1000MHz-13000MHz

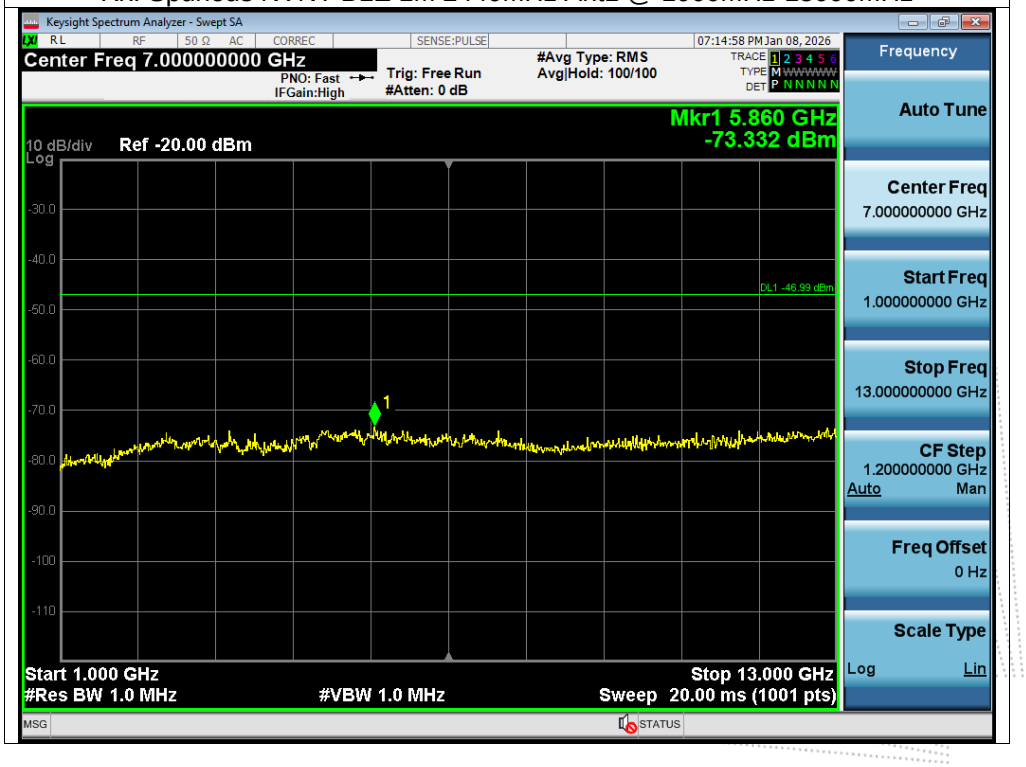

Rx. Spurious NVNT BLE 1M 2480MHz Ant1 @ 30MHz-1000MHz

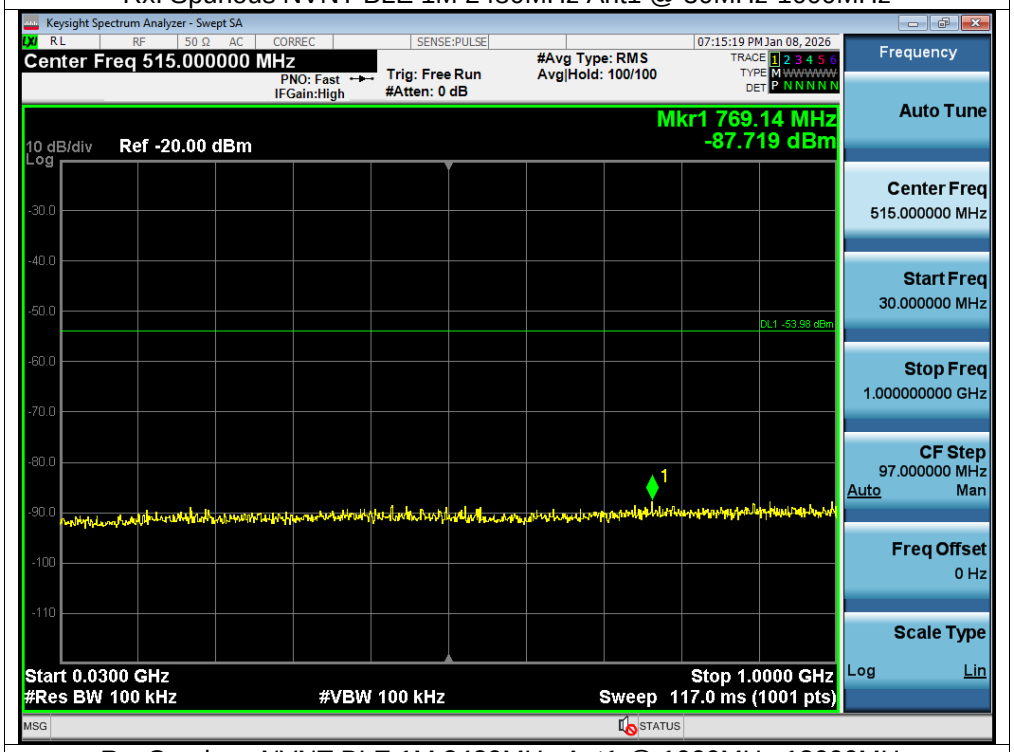

Rx. Spurious NVNT BLE 1M 2480MHz Ant1 @ 1000MHz-13000MHz

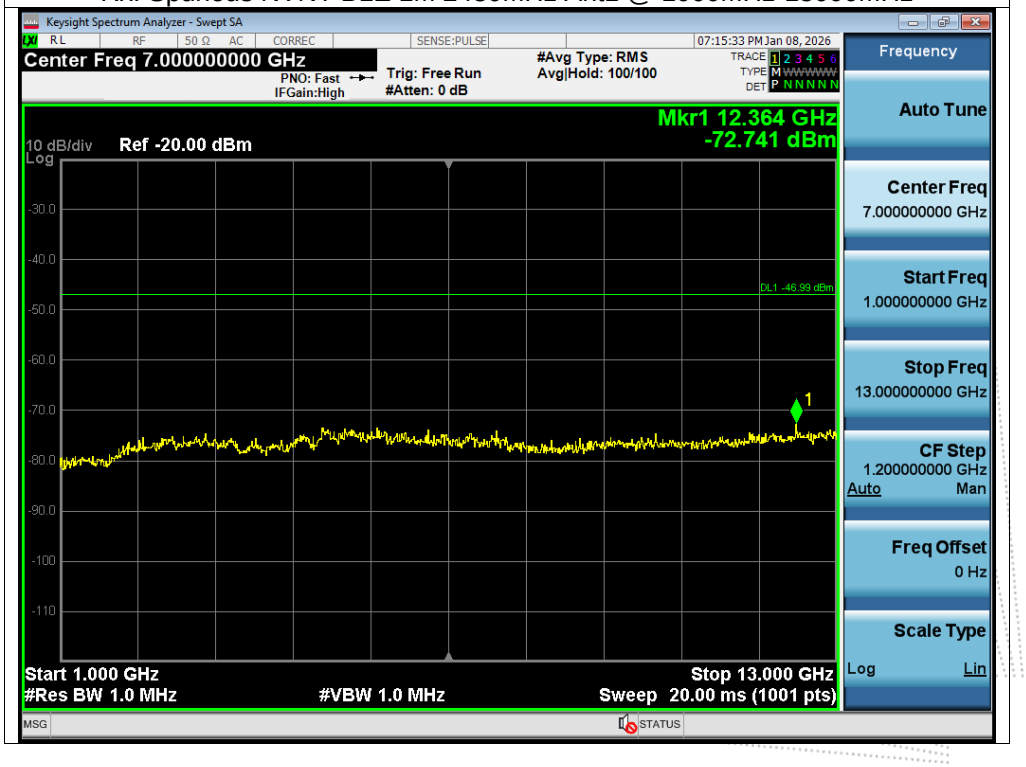

12. Transmission Antenna Gain (Eirp Antenna Power) Measurement

12.1 Block Diagram Of Test Setup

For EUT radiation measurement

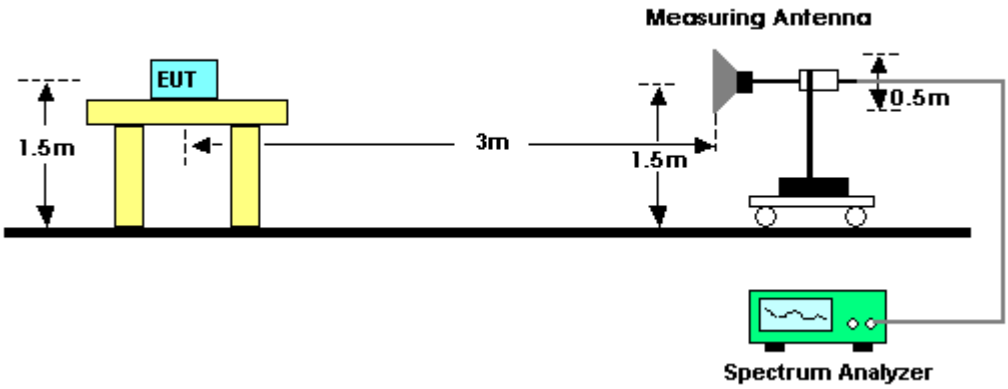

For standard antenna measurement

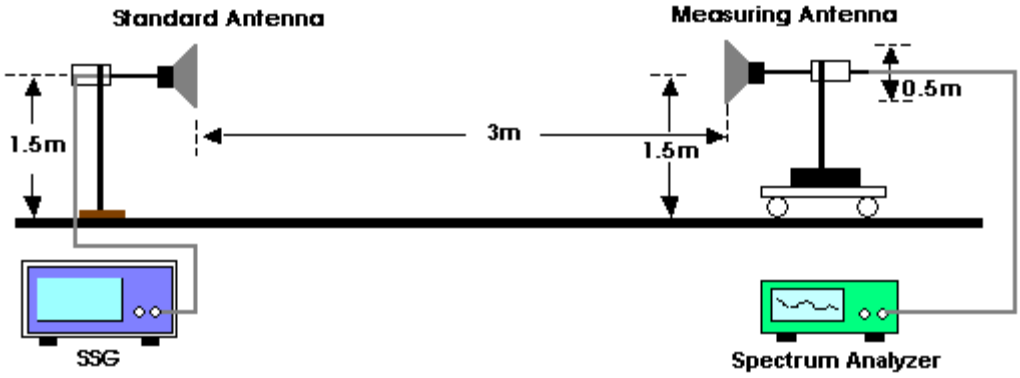

12.2 Limit

Item	Limits
EIRP Power Density	≦16.91dBm/MHz (FH form 2427 - 2470.75 MHz) ≦22.14dBm/MHz (OFDM,DS from 2400~2483.5MHz) ≦22.14dBm (Other from 2400~2483.5MHz)
Note: This test item is not applied for radio equipment with equivalent isotropic radiation power lower than 12.14dBm/MHz, but Antenna Power(Conducted) limit is 10 mW/MHz (10 dBm/MHz), So the test item will not be applied to the transmission antenna which has a gain of 2.14dBi or less	

12.3 Measuring Instruments And Setting

Please refer to section 5 in this report. The following table is the setting of spectrum analyzer.

Spectrum Parameter	**Setting**
Attenuation	Auto
RB/VB	1 MHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

12.4 Test procedure

1. Set EUT ad measuring antenna at the same height and roughly facing each other.
2. Move the measuring antenna height up and down within ± 50cm of EUT height and swing it to find the maximum output of the measuring antenna. The output level at the spectrum analyzer is read sa “E“.
3. Remove the EUT from the turn table and put the replacing antenna facing to measuring antenna at same height. Set the standard signal generator (SSG) at same frequency and transmit on then receive the signal
4. Swing the replacing antenna give a maximum receiving level.
5. Move the measuring antenna height up and down within ± 50cm of replacing antenna height and swing it to find the maximum receiving level.
6. Set SSG output power at Pt to give the equivalent output level of “E” or caluate Pt with SSG output which gives the nearest of “E” and difference (± 1dB). Record the Pt.
7. Calculate EIRP by the formula below EIRP = Gt – L + Pt.
Gt: gain of replacing antenna (dBi)
L: feeder loss between SSG and replacing antenna
Pt: Output power of the SSG
8. If the antenna for the EUT has circular polarization, sum of V-field and H-field will be result if measuring antenna is linear polarization.

12.5 Test Result

Note: This test item will not be applied to the transmission antenna which has a gain of 2.14 dBi or less

13. Transmission Radiation Angle Width (3db Beamwidth) Measurement

13.1 Block Diagram Of Test Setup

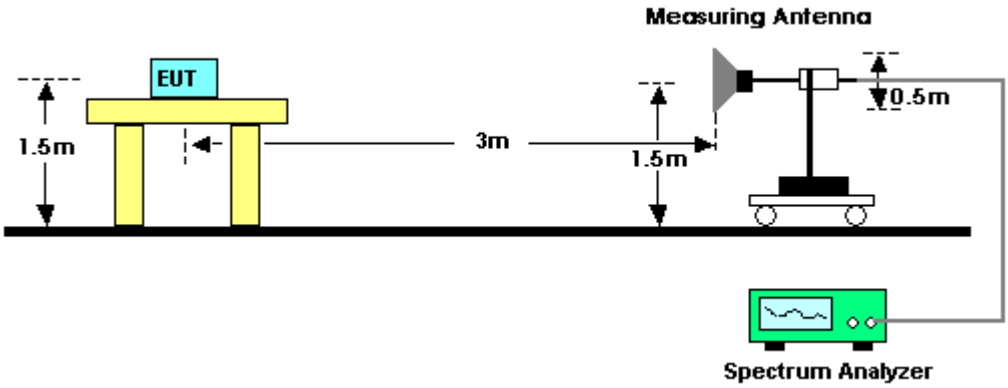

13.2 Limit

Item	Limits
3dB antenna beam width	360/A (If A<1; then A=1)
Note: A = E.I.R.P. / (2.14dBi + "Antenna Power (limit)" of each modulation method (*3mW/MHz, 10mW/MHz, etc.))	

13.3 Measuring Instruments And Setting

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	0 MHz
RB	1 MHz
VB	1 kHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

13.4 Test procedure

1. Set EUT and measuring antenna at the same height and roughly facing each other.

2. Set spectrum analyzer with condition in section 4.7.2 and tune reference level to observe receving signal position.

3. Rotate directions of the EUT horizontally and ertically to find the maximum receiving power.

4. Move the measuring antenna height up and down within ± 50cm of EUT height and swing it to find the maximum output of measuing antenna. The output level at the spectrum analyzer is read as “E”

5. Calculate permitted radiation angle in horizontal and vertical using EIRP measured in another test method.

6. Calculate 3dB antenna beam width by the formula below 360/A (If A<1; then A=1).

13.5 Test Result

N/A

14. Radio Interference Prevention Capability Measurement

14.1 Block Diagram Of Test Setup

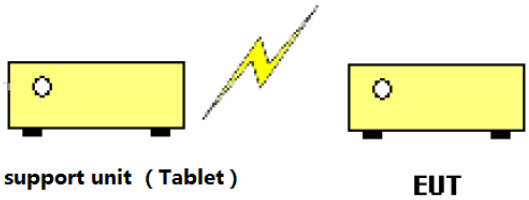

14.2 Limit

Item	Limits
Identification code	≥48 bits

14.3 Measuring Instruments And Setting

Item	Limits
MAC IP List	MAC Scan

14.4 Test procedure

1. In the case that the EUT has the function of automatically transmitting the identification code: a. Transmit the predetermined identification codes form EUT. b. Check the transmitted identification codes with the demodulator.

2. In the case of receiving the identification ocde:
a. Transmit the predetermined identification codes form the counterpart.
b . Check if communication is normal.
c. Transmit the signals other than predetermined ID codes form the counterpart.
d. check if the EUT stops the transmission, or if it displays that idnetification codes are different from the predetermined ones.

14.5 Test Result

Temperature:	26^{0}C		
Humidity:	54 % RH	Test Voltage	DC 3.7V
Operation Mode:	GFSK		

Bluetooth Device Address: 62-8E-35-BD-C5-87 PASS

15. EUT Test Setup Photographs

Measurement Photos

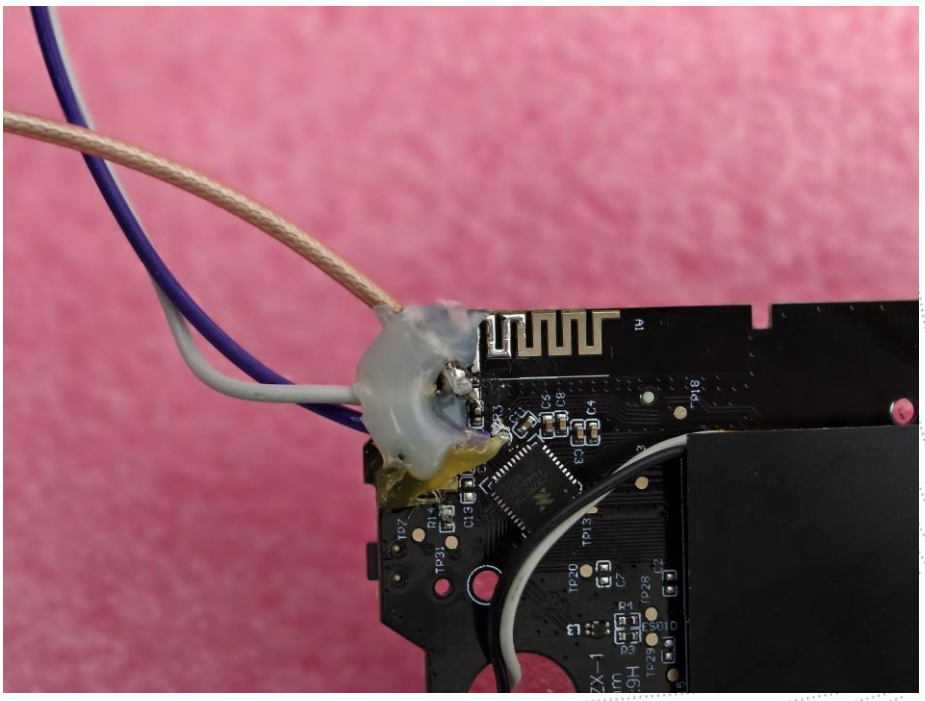

STATEMENT

1. The equipment lists are traceable to the national reference standards.

2. The test report can not be partially copied unless prior written approval is issued from our lab.

3. The test report is invalid without the "special seal for inspection and testing".

4. The test report is invalid without the signature of the approver.

5. The test process and test result is only related to the Unit Under Test.

6. Sample information is provided by the client and the laboratory is not responsible for its authenticity.

7. The quality system of our laboratory is in accordance with ISO/IEC17025.

8. If there is any objection to this test report, the client should inform issuing laboratory within 15 days from the date of receiving test report.

Address:
Room 101M, Unit 1, Building1, Pengyuan, No.18, Lilang Road, Shanglilang, Nanwan Subdistrict, Longgang District, Shenzhen, Guangdong, China

TEL：400-788-9558

C.: 518116

FAX：0755-33229357

Website：http://www.chnbctc.com

Consultation E-mail: bctc@bctc-lab.com.cn

Complaint/Advice E-mail: advice@bctc-lab.com.cn

※※※※※ **END** ※※※※※