


Site: AC1	Time: 2018/06/26 - 19:40
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11ac-VHT20 at Channel 5700MHz	

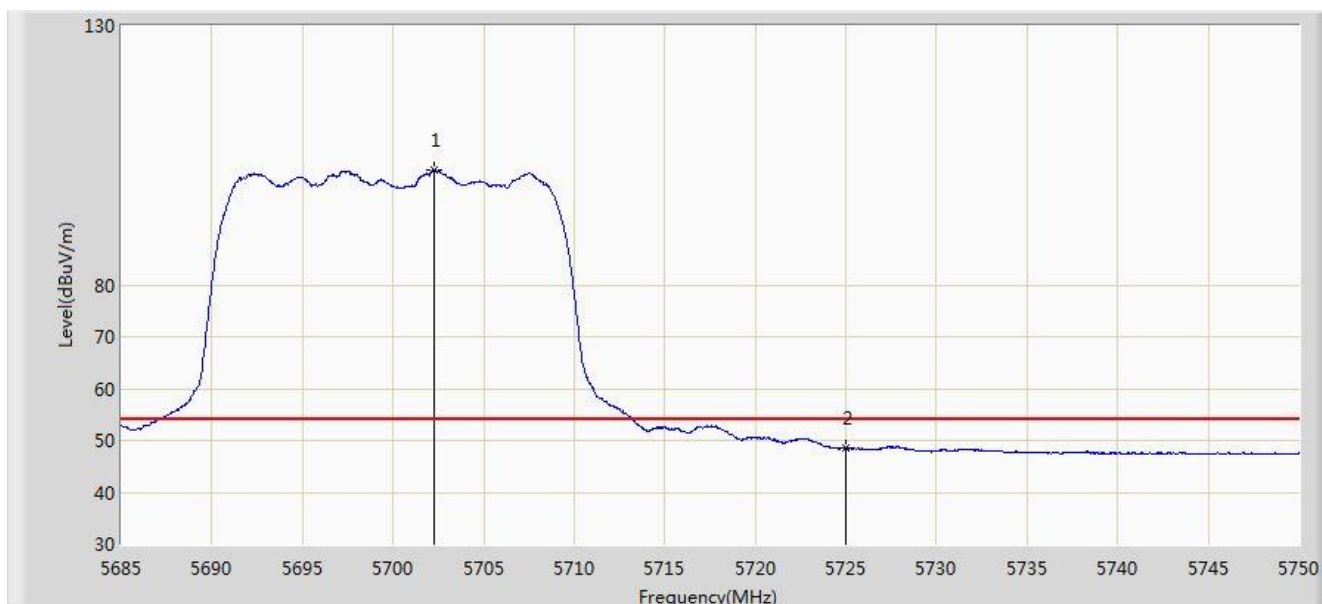


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5702.290	102.261	97.371	N/A	N/A	4.890	AV
2			5725.000	48.640	43.611	-5.360	54.000	5.029	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/20 - 04:06
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11ac-VHT20 at Channel 5745MHz	

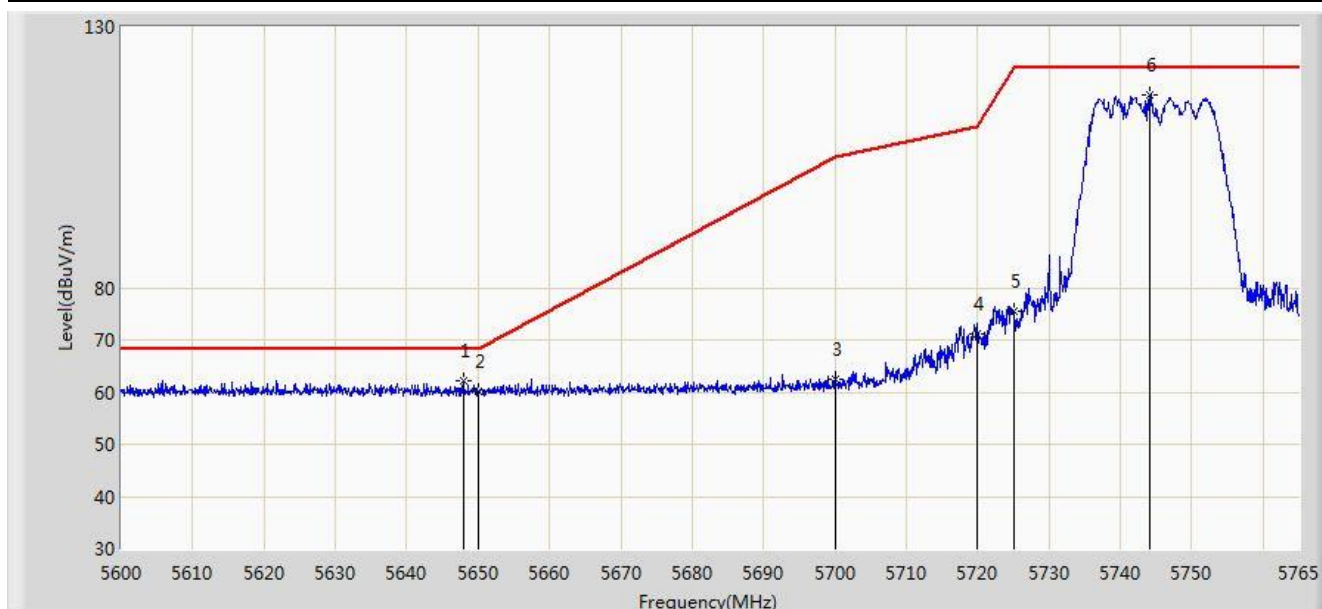


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5647.933	62.218	57.554	-5.982	68.200	4.665	PK
2			5650.000	60.050	55.379	-8.150	68.200	4.671	PK
3			5700.000	62.320	57.442	-42.880	105.200	4.878	PK
4			5720.000	71.107	66.110	-39.693	110.800	4.997	PK
5			5725.000	75.592	70.563	-46.608	122.200	5.029	PK
6		*	5744.045	116.877	111.727	N/A	N/A	5.149	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/20 - 04:04
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11ac-VHT20 at Channel 5745MHz	

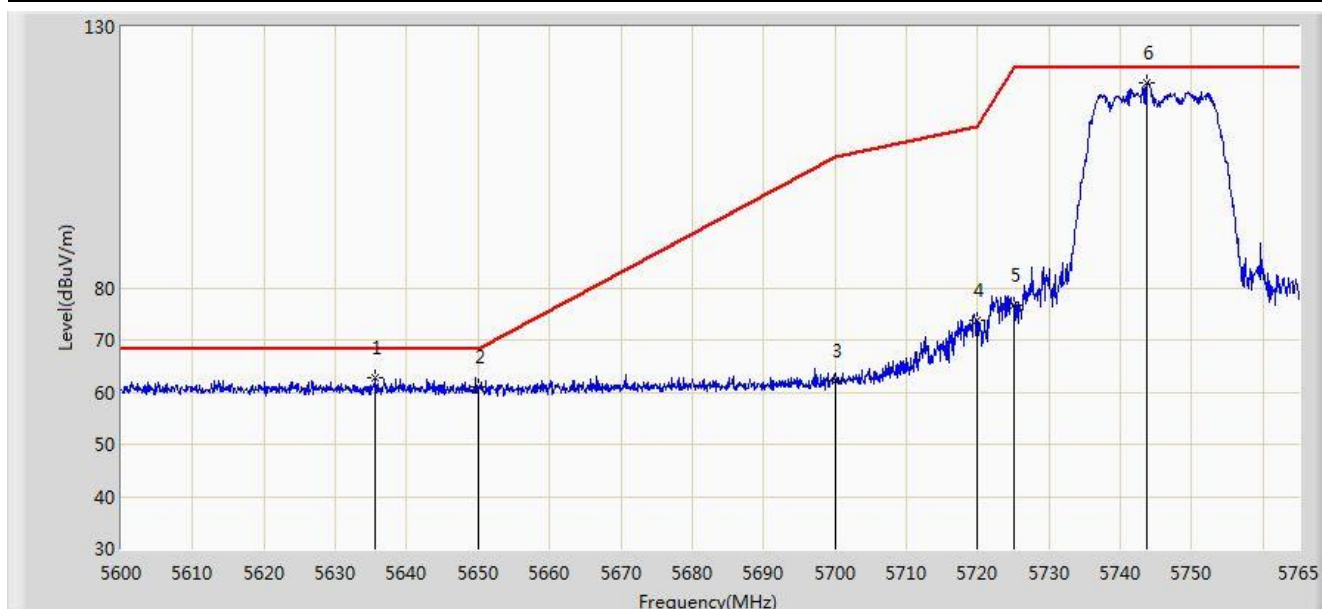


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5635.558	62.719	58.094	-5.481	68.200	4.625	PK
2			5650.000	60.947	56.276	-7.253	68.200	4.671	PK
3			5700.000	62.130	57.252	-43.070	105.200	4.878	PK
4			5720.000	73.638	68.641	-37.162	110.800	4.997	PK
5			5725.000	76.557	71.528	-45.643	122.200	5.029	PK
6		*	5743.797	119.277	114.129	N/A	N/A	5.148	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/20 - 04:08
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11ac-VHT20 at Channel 5825MHz	

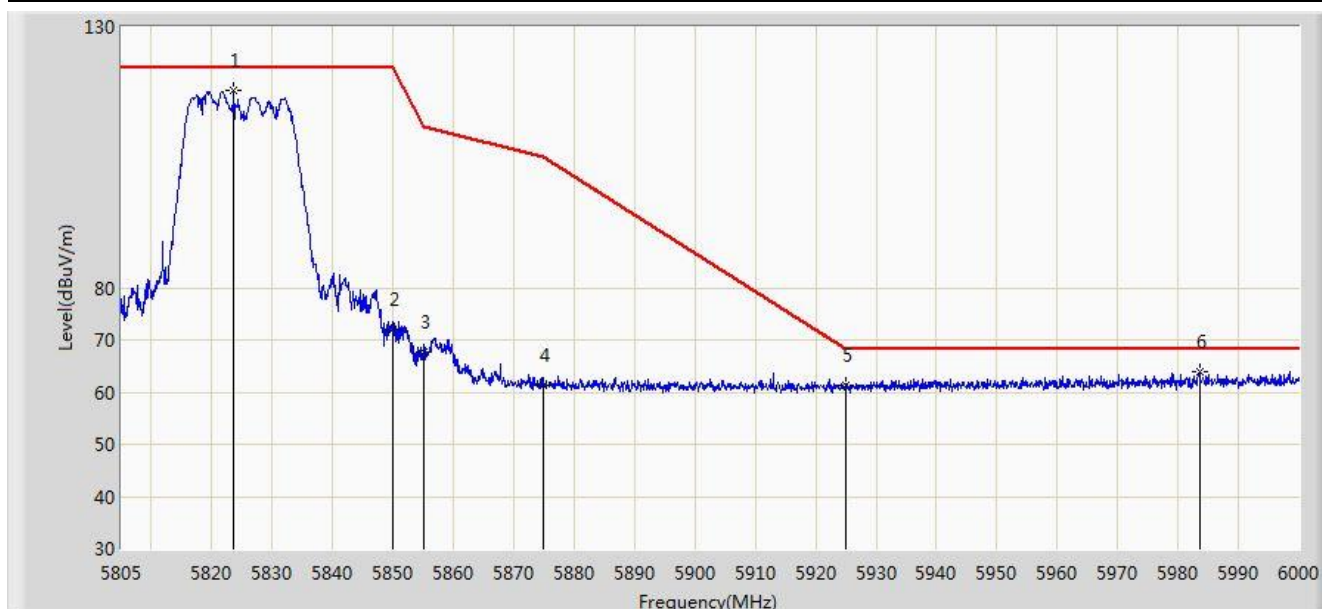


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5823.623	117.740	112.160	N/A	N/A	5.580	PK
2			5850.000	72.012	66.286	-50.188	122.200	5.726	PK
3			5855.000	67.772	62.026	-43.028	110.800	5.746	PK
4			5875.000	61.237	55.417	-43.963	105.200	5.820	PK
5			5925.000	61.336	55.370	-6.864	68.200	5.967	PK
6		*	5983.620	63.869	57.785	-4.331	68.200	6.083	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/20 - 04:10
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11ac-VHT20 at Channel 5825MHz	

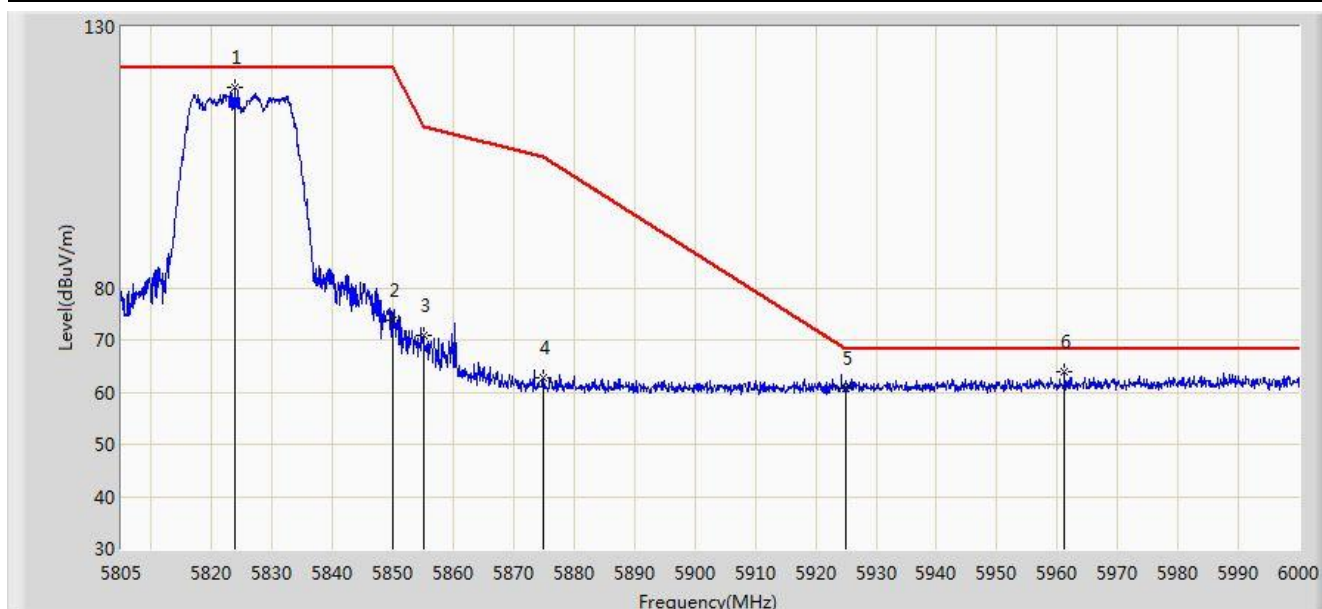


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5823.720	118.324	112.744	N/A	N/A	5.580	PK
2			5850.000	73.851	68.125	-48.349	122.200	5.726	PK
3			5855.000	70.809	65.063	-39.991	110.800	5.746	PK
4			5875.000	62.663	56.843	-42.537	105.200	5.820	PK
5			5925.000	60.605	54.639	-7.595	68.200	5.967	PK
6			5961.195	63.904	57.858	-4.296	68.200	6.046	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/20 - 04:25
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11ac-VHT40 at Channel 5190MHz	

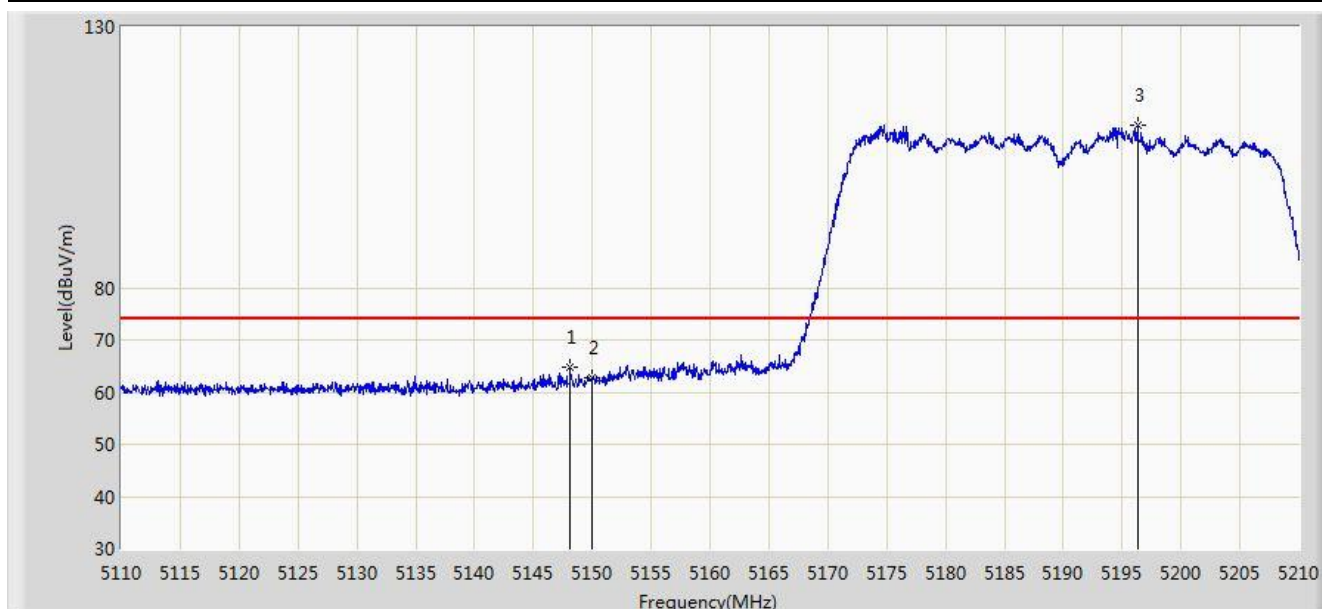


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5148.150	64.797	60.622	-9.203	74.000	4.175	PK
2			5150.000	62.650	58.481	-11.350	74.000	4.170	PK
3		*	5196.300	111.133	107.122	N/A	N/A	4.011	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/20 - 04:27
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11ac-VHT40 at Channel 5190MHz	

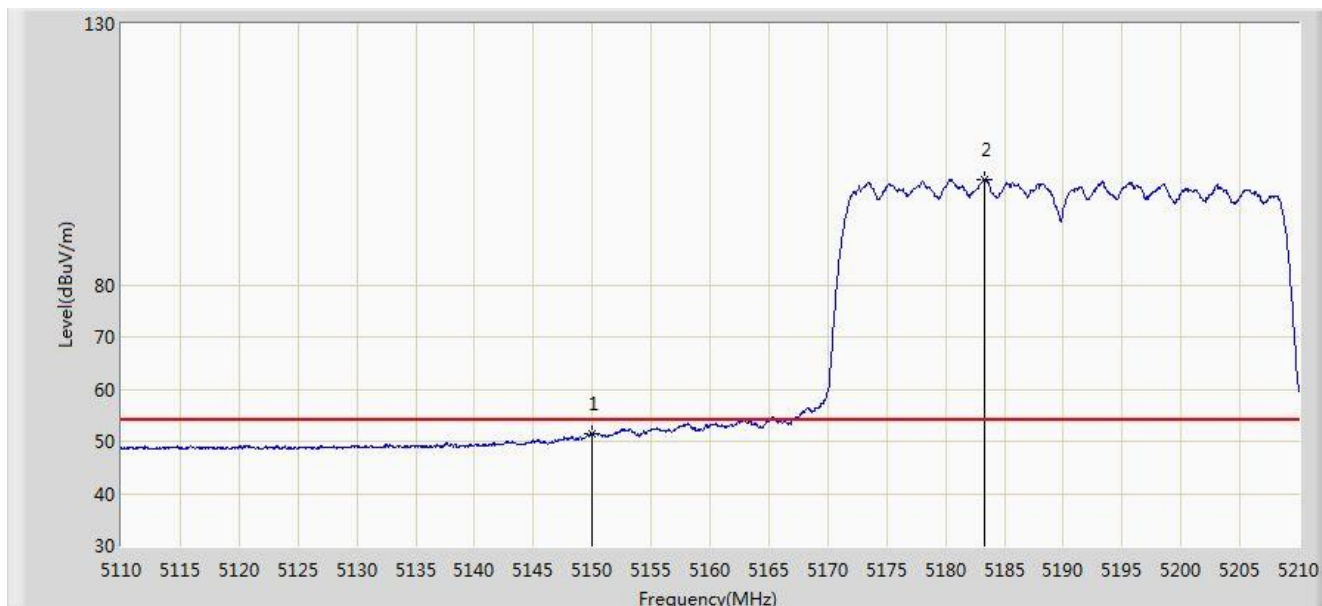


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	51.314	47.145	-2.686	54.000	4.170	AV
2		*	5183.300	100.206	96.149	N/A	N/A	4.057	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/20 - 04:24
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11ac-VHT40 at Channel 5190MHz	

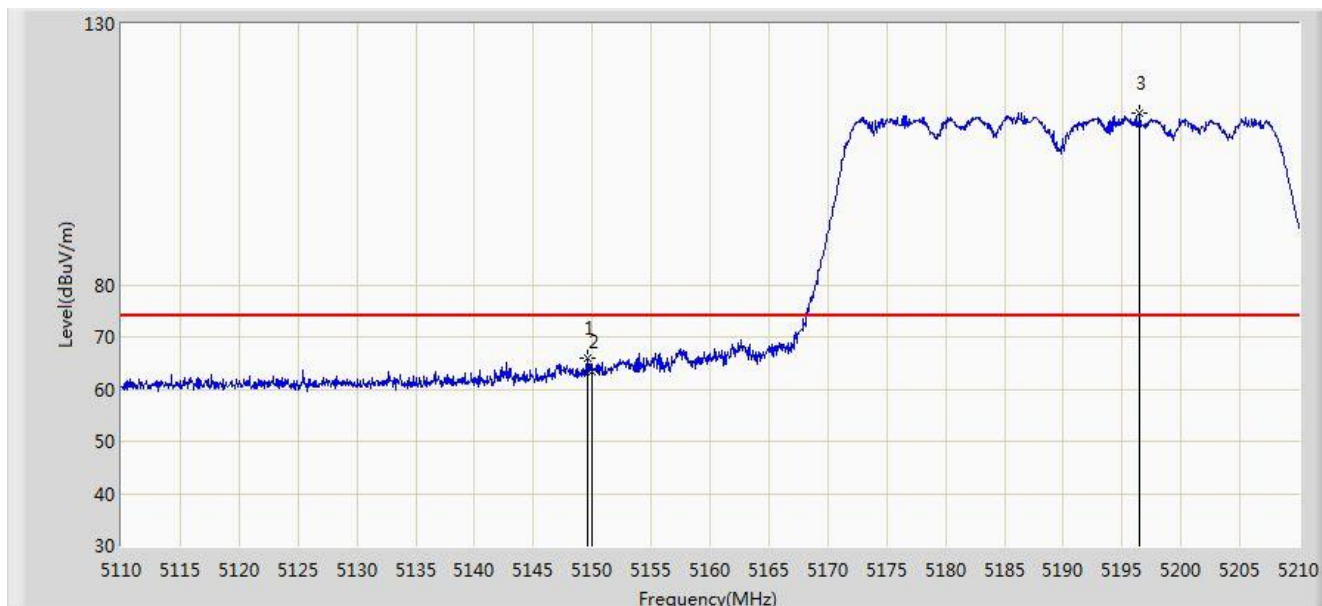


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5149.650	65.841	61.671	-8.159	74.000	4.170	PK
2			5150.000	63.476	59.307	-10.524	74.000	4.170	PK
3		*	5196.500	112.865	108.855	N/A	N/A	4.010	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/20 - 04:22
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11ac-VHT40 at Channel 5190MHz	

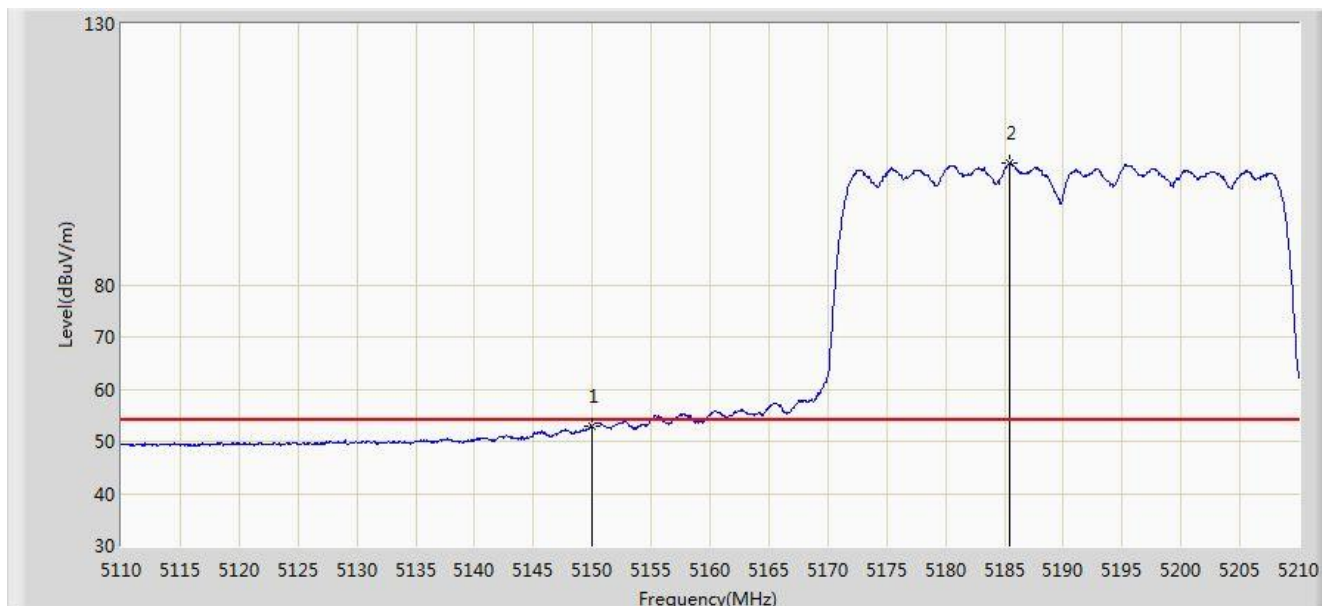


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	52.985	48.816	-1.015	54.000	4.170	AV
2		*	5185.500	103.201	99.152	N/A	N/A	4.049	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/26 - 21:19
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11ac-VHT40 at Channel 5310MHz	

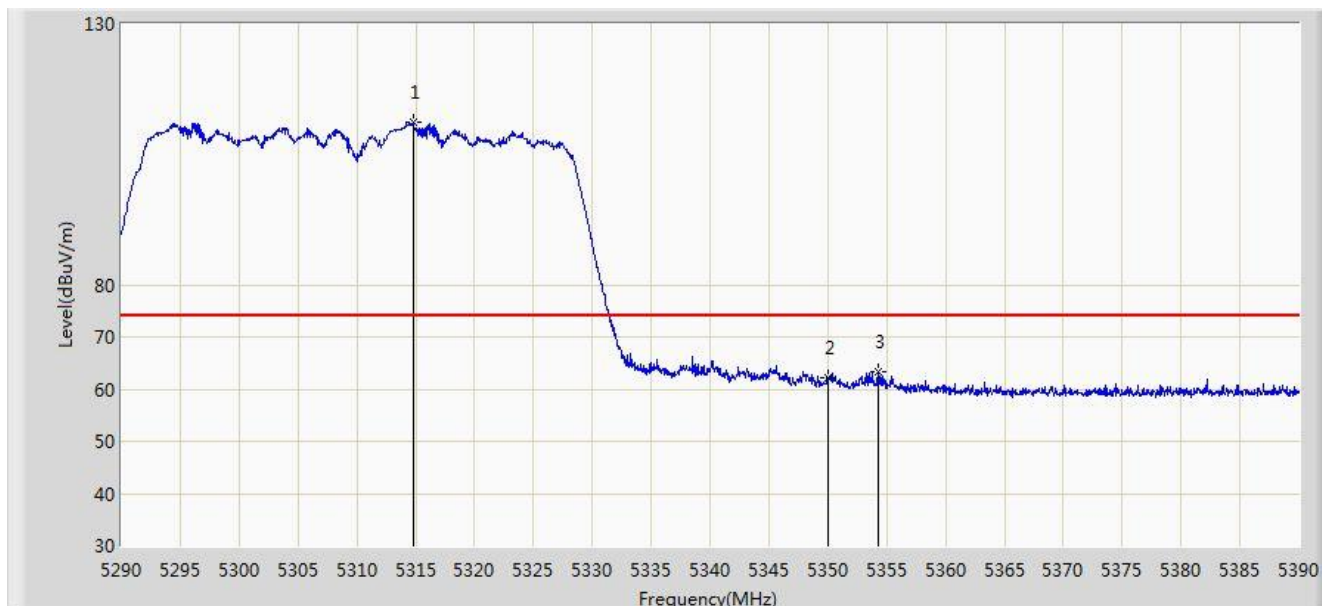


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5314.800	111.158	107.319	N/A	N/A	3.838	PK
2			5350.000	62.163	58.258	-11.837	74.000	3.904	PK
3			5354.250	63.248	59.336	-10.752	74.000	3.913	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/26 - 21:28
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11ac-VHT40 at Channel 5310MHz	

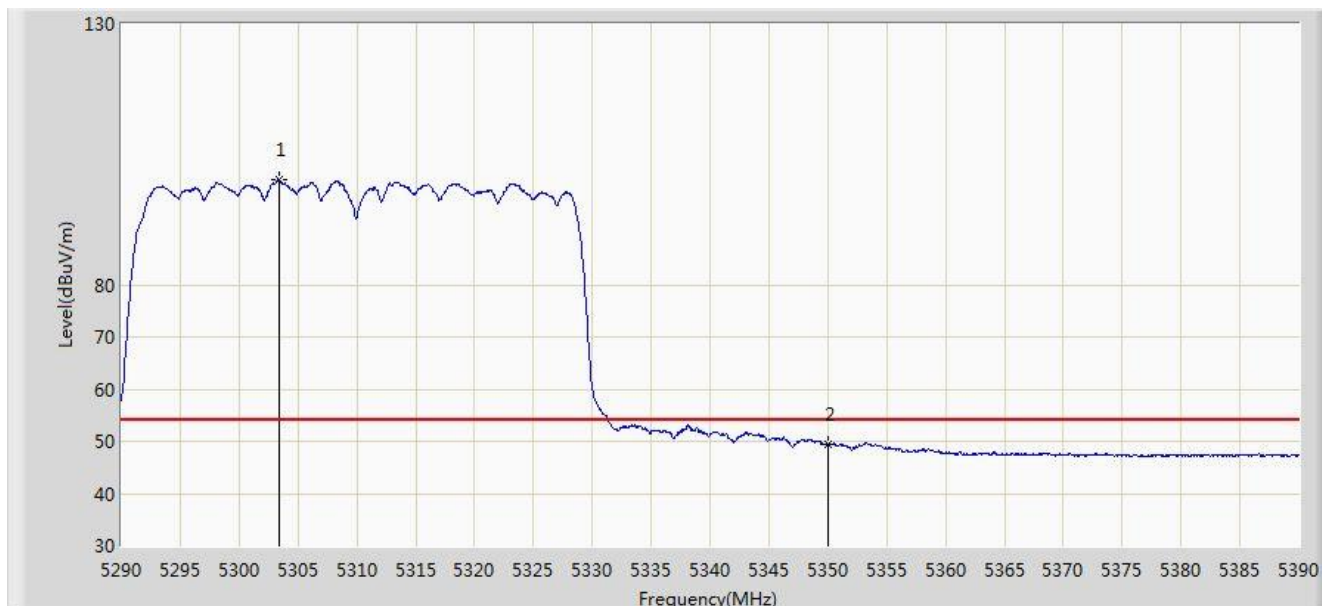


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5303.400	100.078	96.260	N/A	N/A	3.817	AV
2			5350.000	49.395	45.490	-4.605	54.000	3.904	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/26 - 21:32
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11ac-VHT40 at Channel 5310MHz	

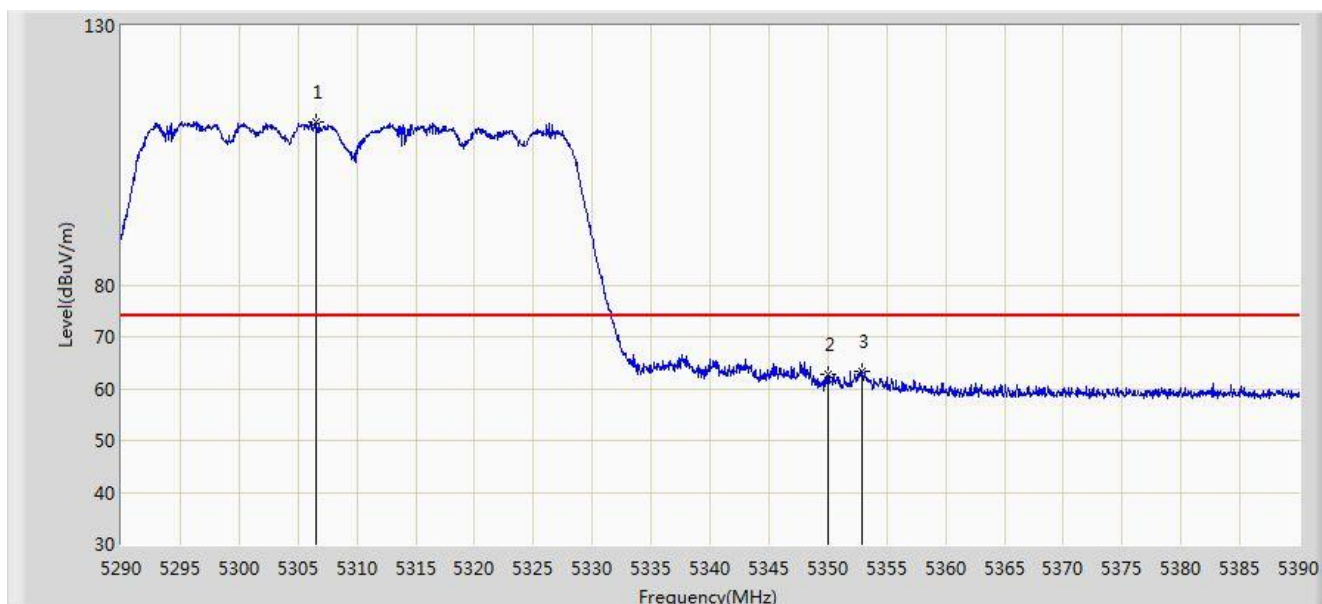


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5306.550	111.586	107.762	N/A	N/A	3.824	PK
2			5350.000	62.879	58.974	-11.121	74.000	3.904	PK
3			5352.850	63.427	59.517	-10.573	74.000	3.910	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/26 - 21:33
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11ac-VHT40 at Channel 5310MHz	

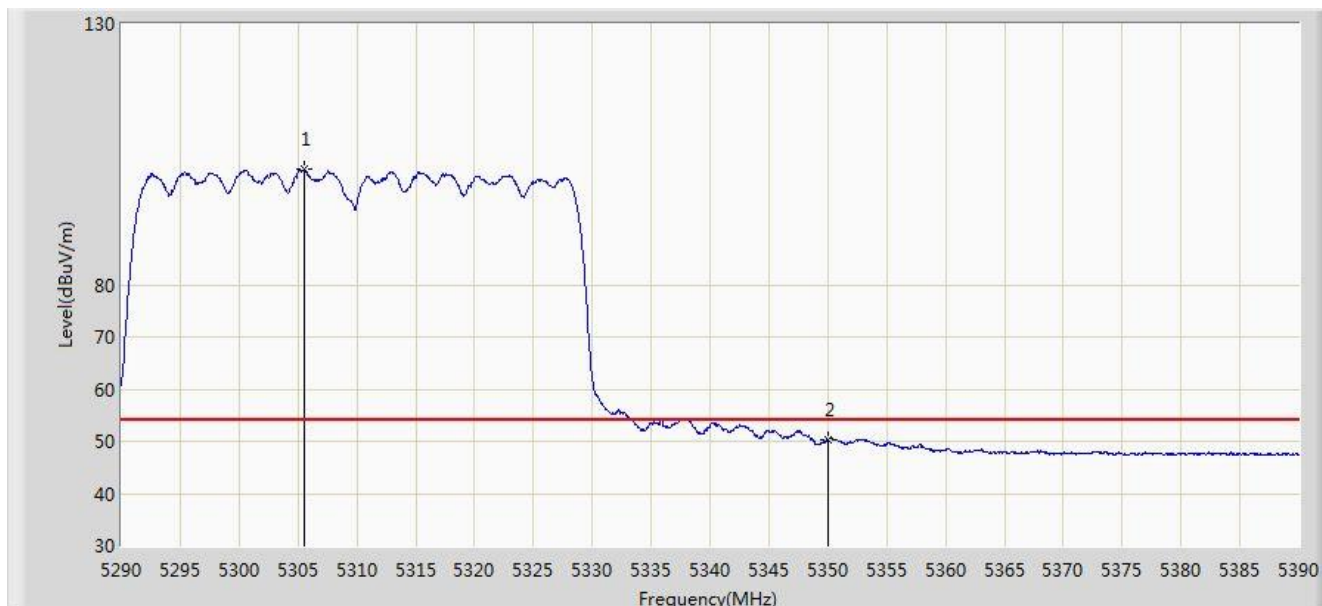


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5305.550	102.050	98.228	N/A	N/A	3.822	AV
2			5350.000	50.362	46.457	-3.638	54.000	3.904	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/26 - 21:35
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11ac-VHT40 at Channel 5510MHz	

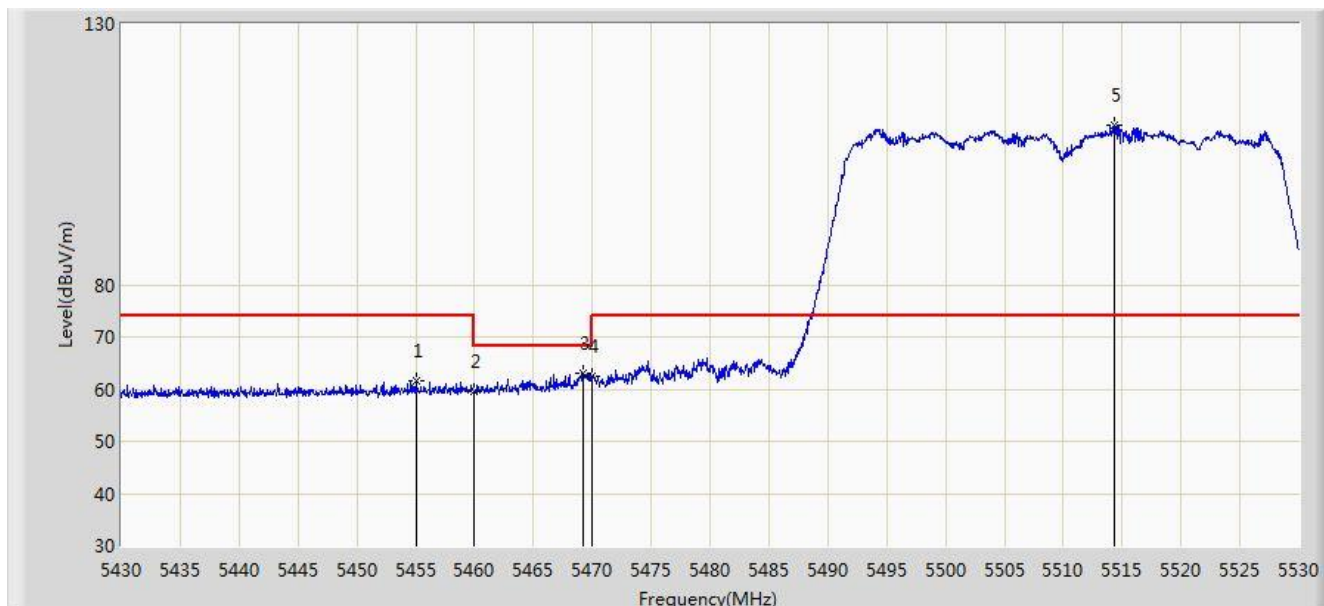


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5455.000	61.539	57.369	-12.461	74.000	4.170	PK
2			5460.000	59.687	55.507	-14.313	74.000	4.180	PK
3			5469.200	63.072	58.871	-5.128	68.200	4.201	PK
4			5470.000	62.562	58.360	-5.638	68.200	4.202	PK
5		*	5514.350	110.617	106.303	N/A	N/A	4.313	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/26 - 21:37
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11ac-VHT40 at Channel 5510MHz	

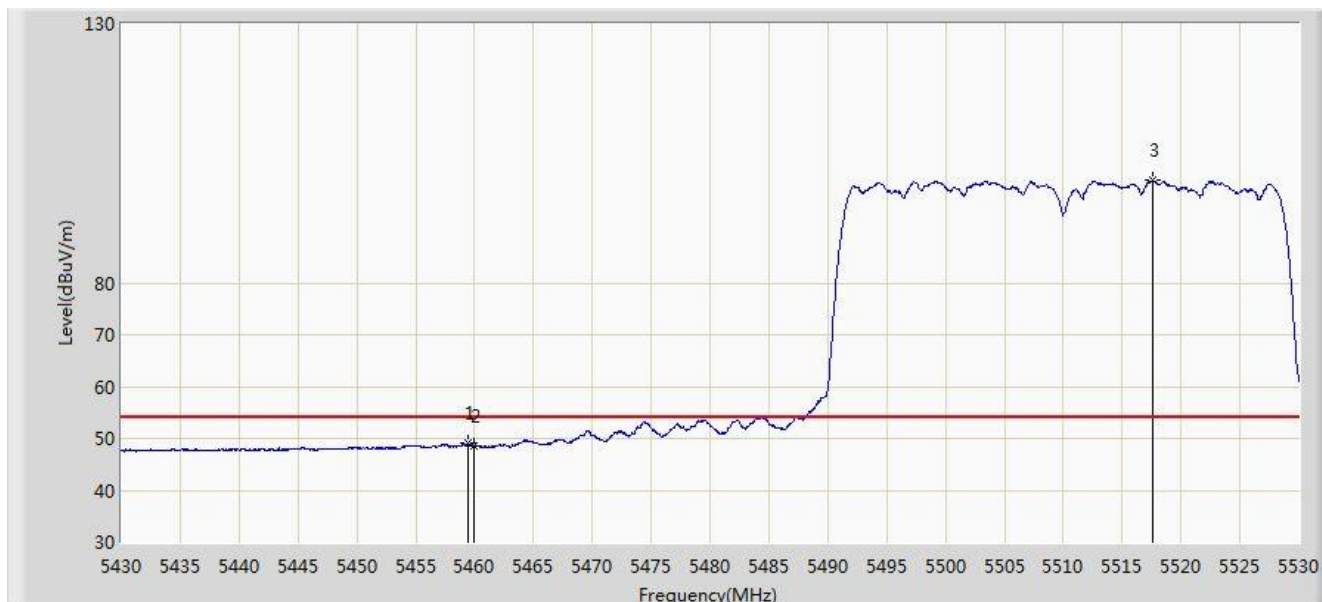


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5459.500	49.127	44.948	-4.873	54.000	4.180	AV
2			5460.000	48.601	44.421	-5.399	54.000	4.180	AV
3		*	5517.650	99.903	95.579	N/A	N/A	4.324	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/26 - 21:43
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11ac-VHT40 at Channel 5510MHz	

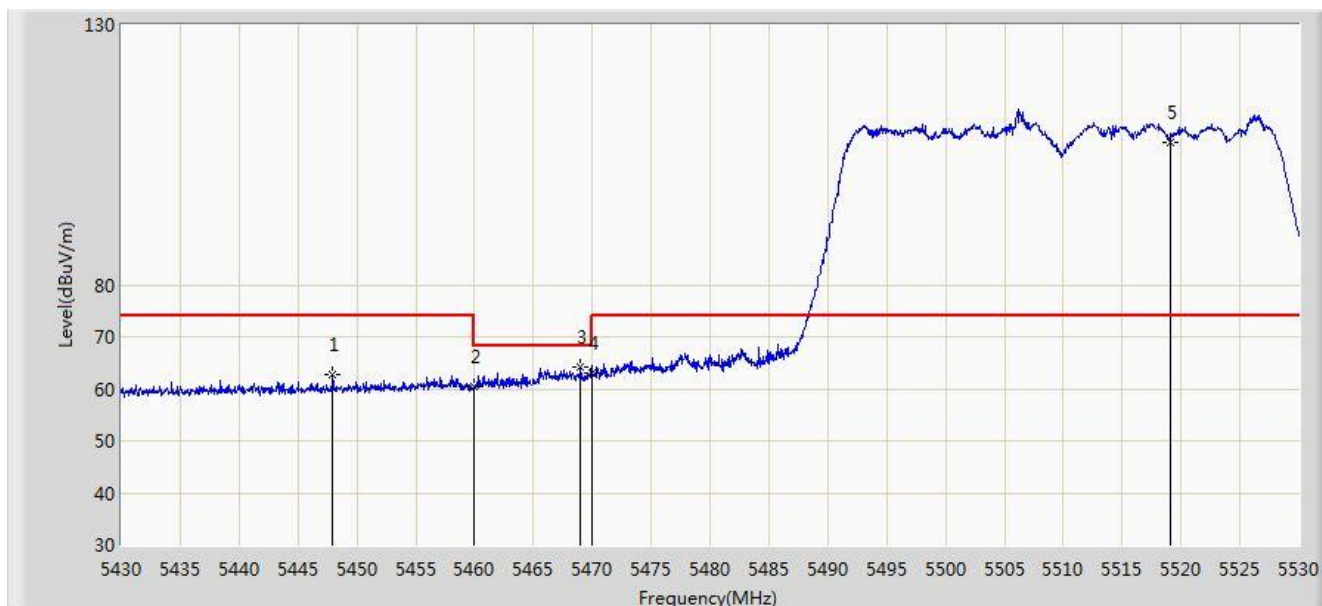


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5447.950	62.708	58.560	-11.292	74.000	4.149	PK
2			5460.000	60.478	56.298	-13.522	74.000	4.180	PK
3			5469.000	64.185	59.985	-4.015	68.200	4.200	PK
4			5470.000	63.010	58.808	-5.190	68.200	4.202	PK
5		*	5519.050	107.406	103.078	N/A	N/A	4.328	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/26 - 21:46
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11ac-VHT40 at Channel 5510MHz	

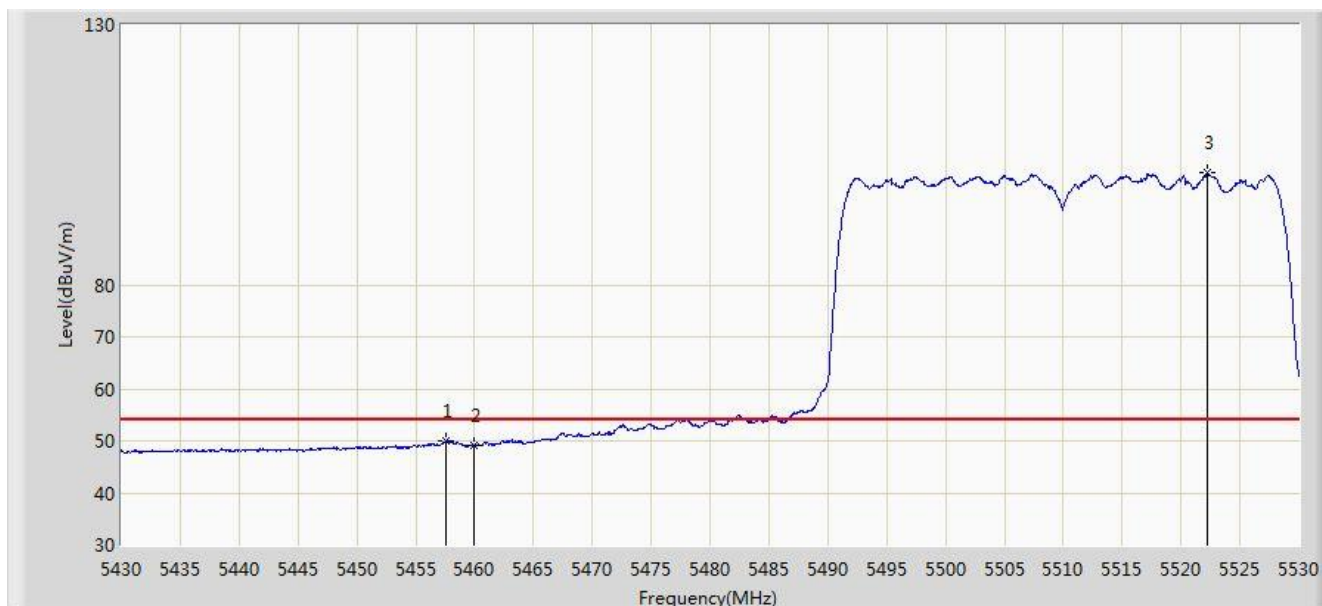


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5457.600	49.959	45.784	-4.041	54.000	4.176	AV
2			5460.000	49.042	44.862	-4.958	54.000	4.180	AV
3		*	5522.200	101.546	97.208	N/A	N/A	4.338	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/26 - 21:48
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11ac-VHT40 at Channel 5670MHz	

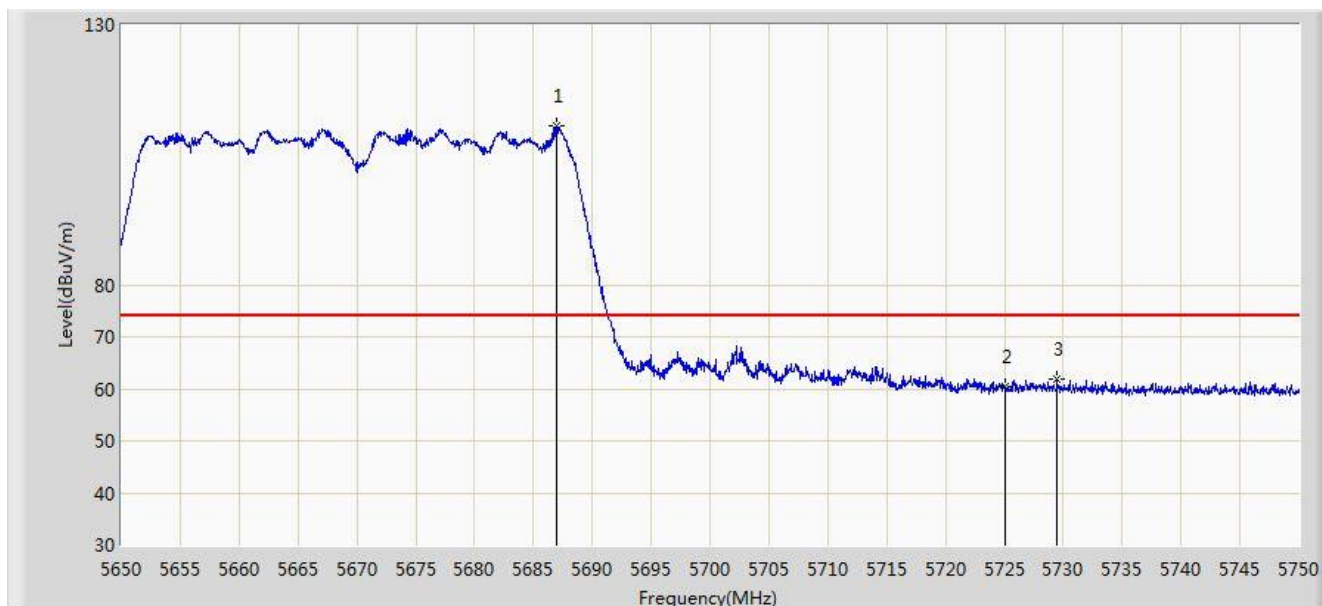


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5686.950	110.568	105.753	N/A	N/A	4.815	PK
2			5725.000	60.406	55.377	-13.594	74.000	5.029	PK
3			5729.450	61.981	56.924	-12.019	74.000	5.058	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/26 - 21:49
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11ac-VHT40 at Channel 5670MHz	

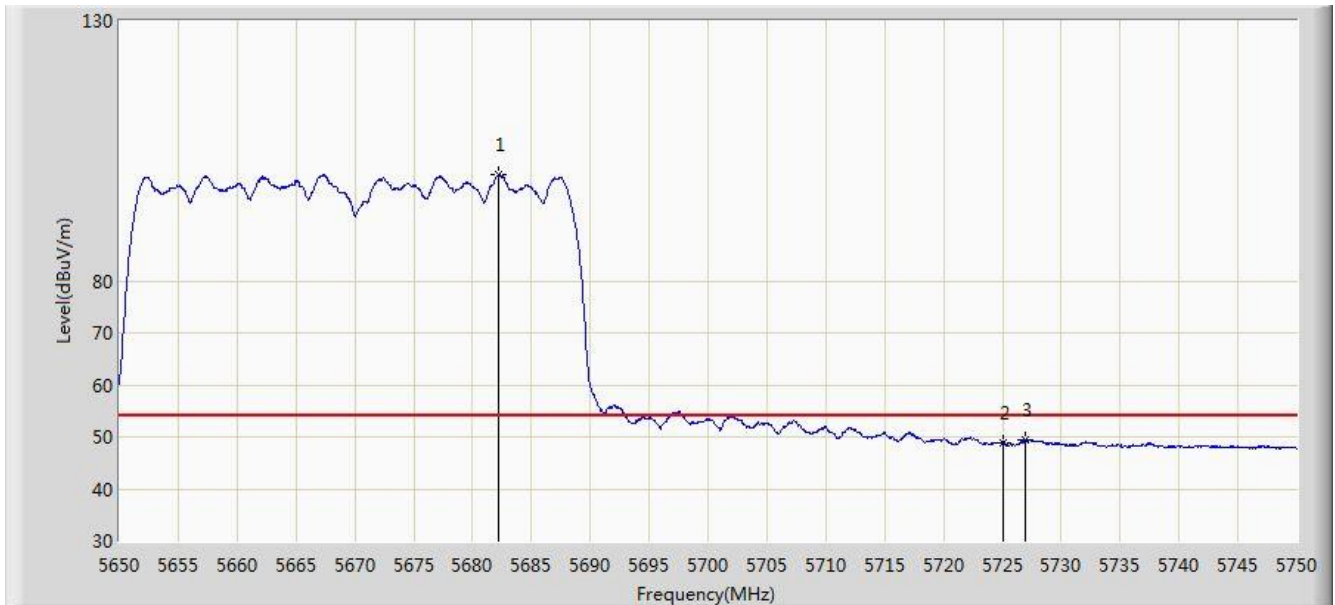


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5682.250	100.417	95.621	N/A	N/A	4.797	AV
2			5725.000	48.844	43.815	-5.156	54.000	5.029	AV
3			5727.000	49.377	44.335	-4.623	54.000	5.042	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)


Site: AC1	Time: 2018/06/26 - 21:51
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11ac-VHT40 at Channel 5670MHz	

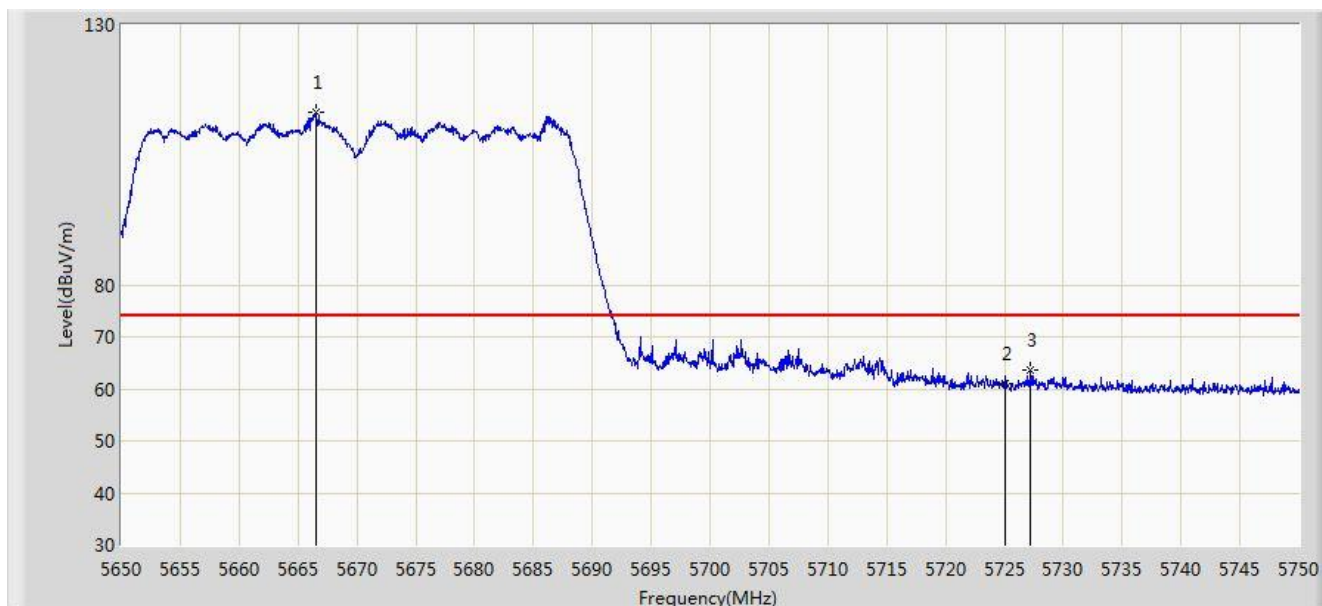

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/26 - 21:52
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11ac-VHT40 at Channel 5670MHz	

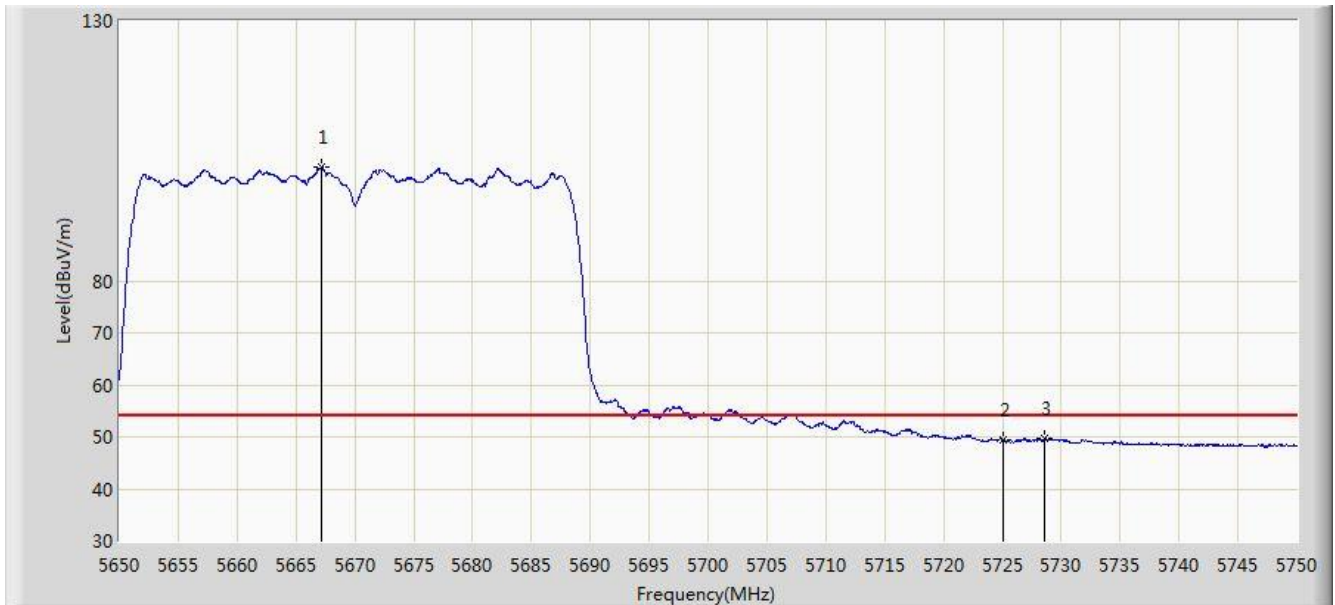


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5667.200	101.956	97.220	N/A	N/A	4.737	AV
2			5725.000	49.533	44.504	-4.467	54.000	5.029	AV
3			5728.600	49.747	44.695	-4.253	54.000	5.052	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/20 - 04:59
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11ac-VHT40 at Channel 5755MHz	

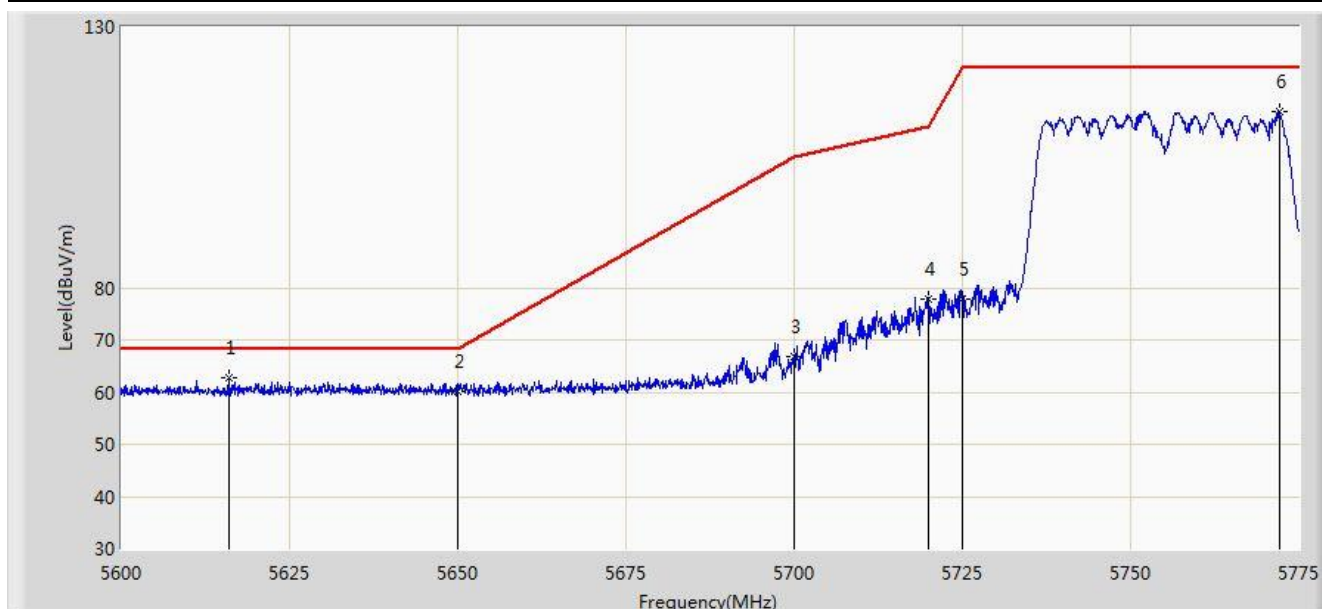


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5615.925	62.681	58.112	-5.519	68.200	4.569	PK
2			5650.000	60.191	55.520	-8.009	68.200	4.671	PK
3			5700.000	66.896	62.018	-38.304	105.200	4.878	PK
4			5720.000	77.718	72.721	-33.082	110.800	4.997	PK
5			5725.000	77.713	72.684	-44.487	122.200	5.029	PK
6			5772.112	113.905	108.603	N/A	N/A	5.302	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/20 - 05:02
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11ac-VHT40 at Channel 5755MHz	

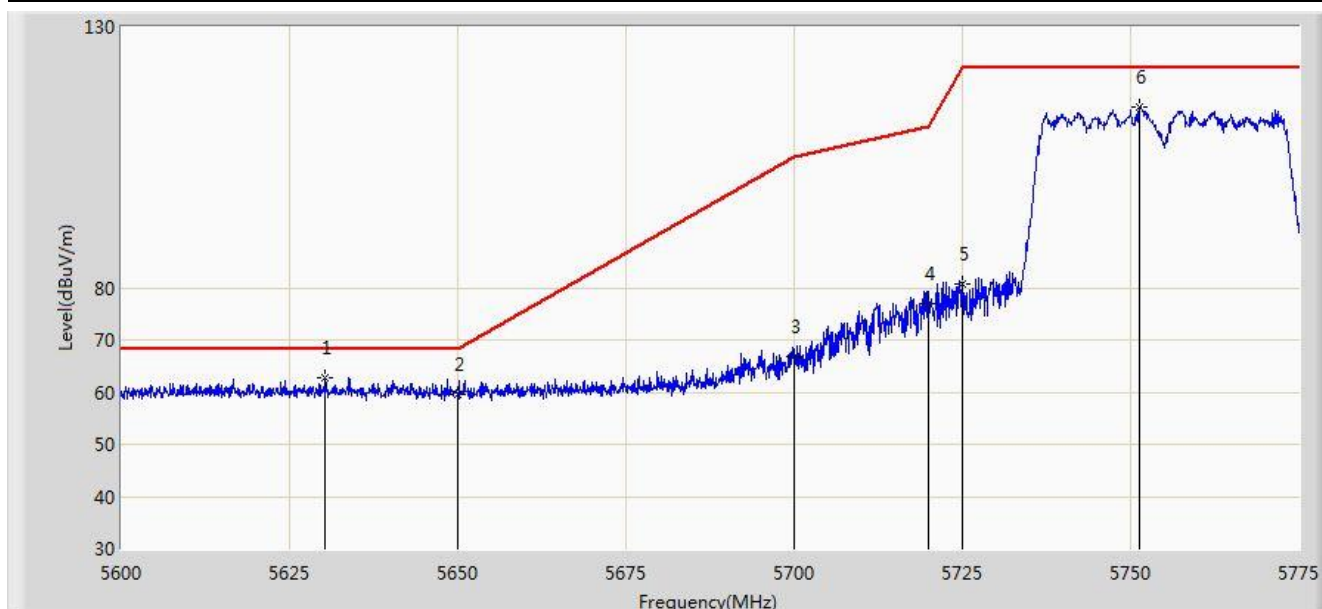


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5630.362	62.764	58.154	-5.436	68.200	4.610	PK
2			5650.000	59.577	54.906	-8.623	68.200	4.671	PK
3			5700.000	66.902	62.024	-38.298	105.200	4.878	PK
4			5720.000	77.040	72.043	-33.760	110.800	4.997	PK
5			5725.000	80.686	75.657	-41.514	122.200	5.029	PK
6			5751.375	114.661	109.470	N/A	N/A	5.191	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/20 - 05:12
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11ac-VHT40 at Channel 5795MHz	

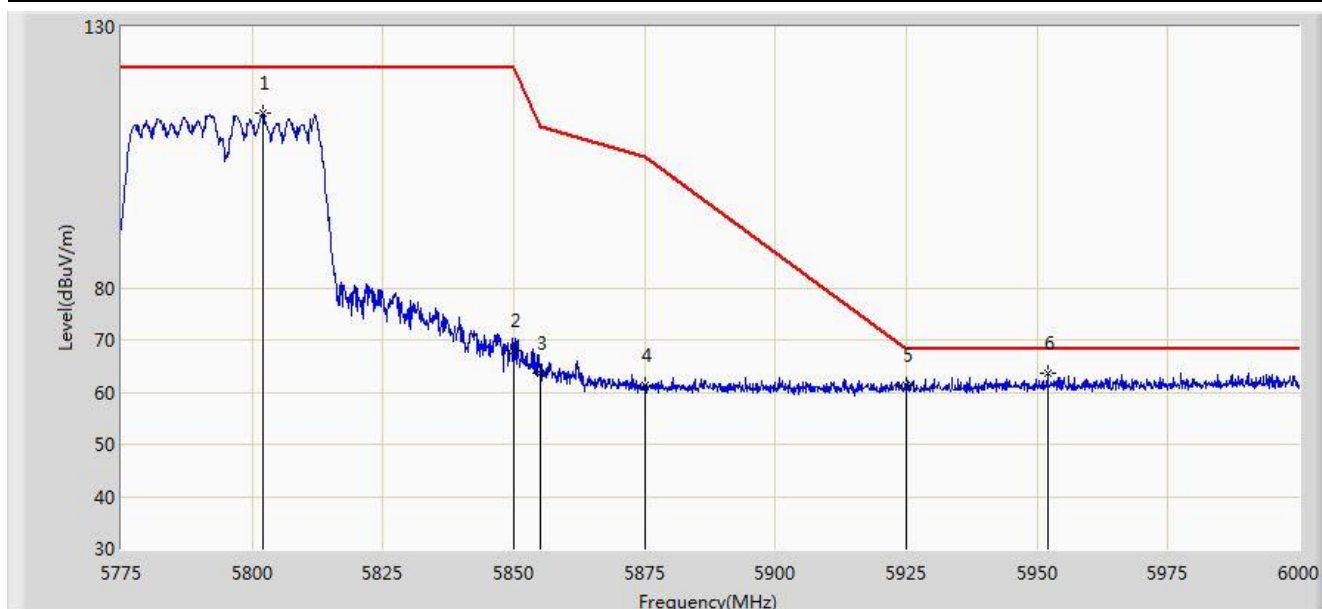


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5802.112	113.481	108.024	N/A	N/A	5.457	PK
2			5850.000	67.915	62.189	-54.285	122.200	5.726	PK
3			5855.000	63.718	57.972	-47.082	110.800	5.746	PK
4			5875.000	61.205	55.385	-43.995	105.200	5.820	PK
5			5925.000	61.265	55.299	-6.935	68.200	5.967	PK
6		*	5951.962	63.590	57.560	-4.610	68.200	6.030	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/20 - 05:13
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11ac-VHT40 at Channel 5795MHz	

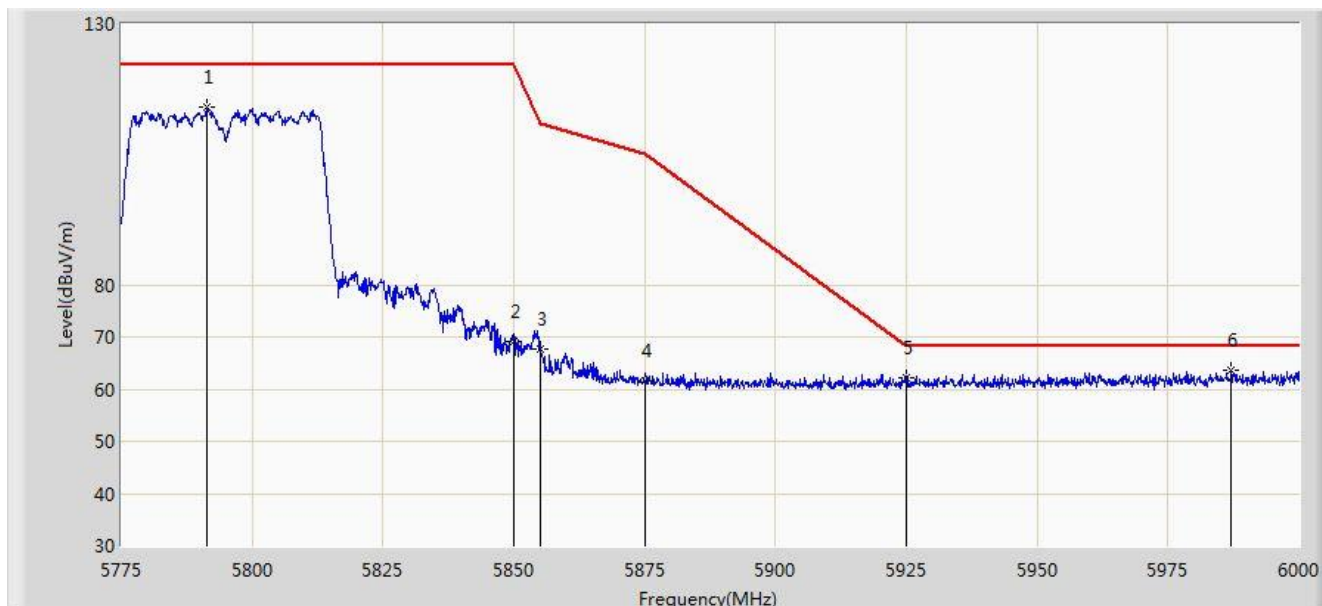


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5791.425	113.994	108.595	N/A	N/A	5.399	PK
2			5850.000	69.242	63.516	-52.958	122.200	5.726	PK
3			5855.000	67.586	61.840	-43.214	110.800	5.746	PK
4			5875.000	61.731	55.911	-43.469	105.200	5.820	PK
5			5925.000	62.169	56.203	-6.031	68.200	5.967	PK
6		*	5987.062	63.713	57.624	-4.487	68.200	6.089	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/20 - 05:34
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11ac-VHT80 at Channel 5210MHz	

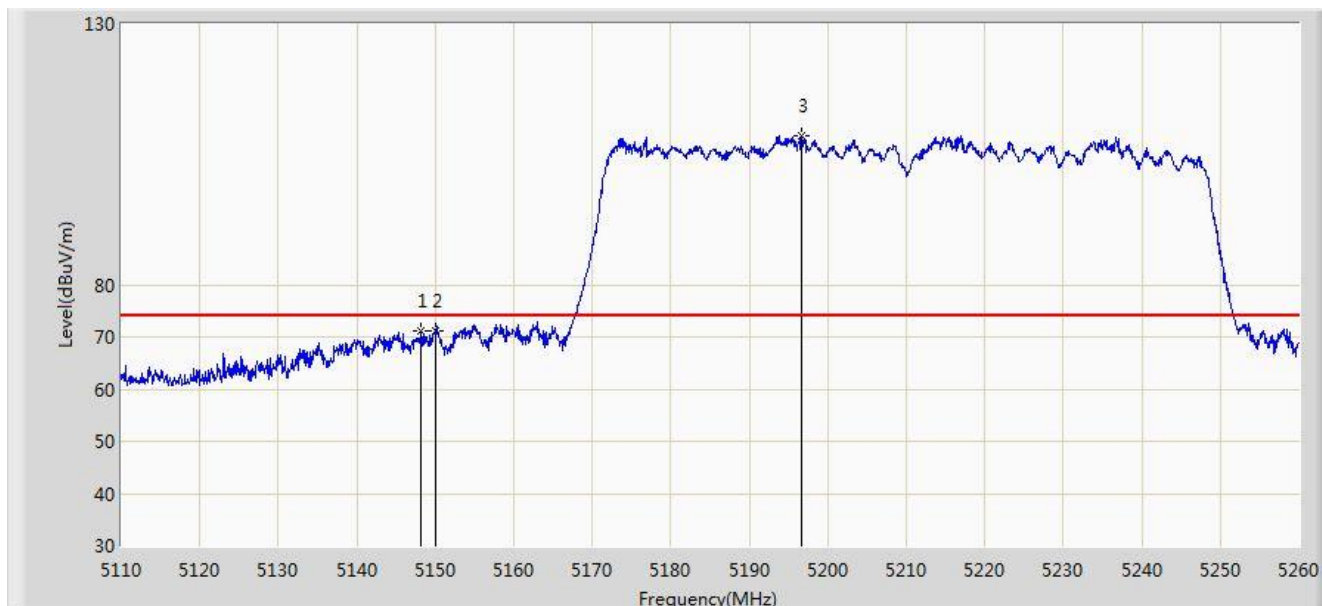


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5148.250	71.048	66.873	-2.952	74.000	4.174	PK
2			5150.000	71.285	67.116	-2.715	74.000	4.170	PK
3		*	5196.700	108.643	104.633	N/A	N/A	4.010	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/20 - 05:36
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11ac-VHT80 at Channel 5210MHz	

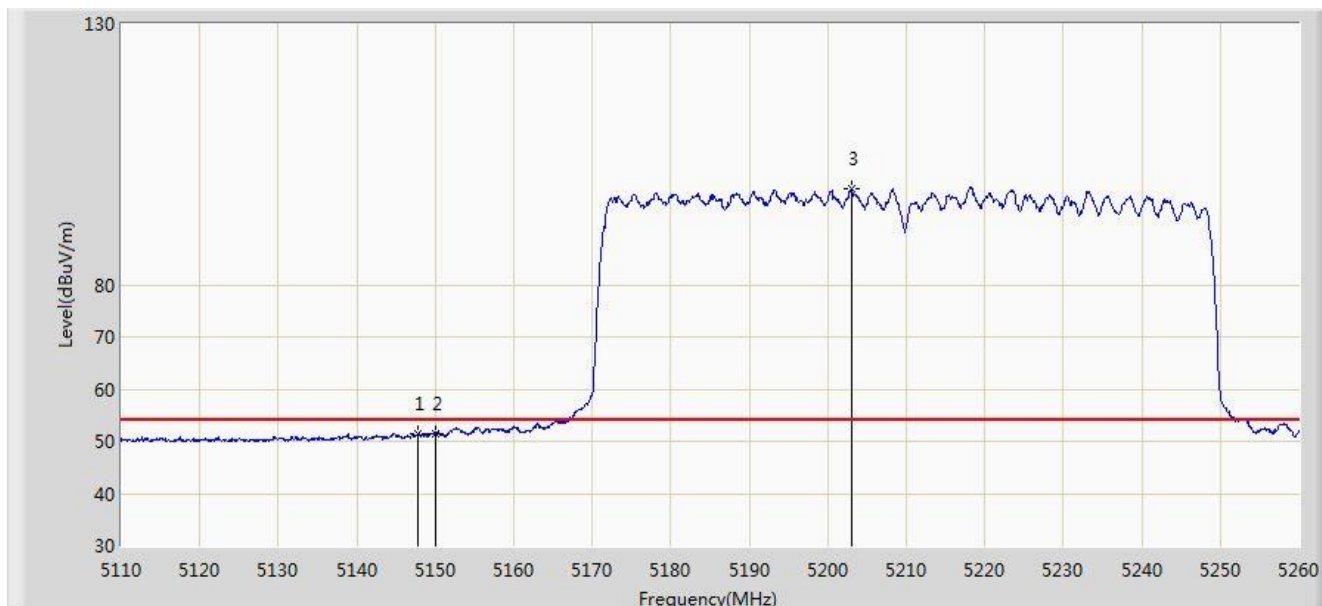


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5147.875	51.561	47.385	-2.439	54.000	4.176	AV
2			5150.000	51.475	47.306	-2.525	54.000	4.170	AV
3		*	5203.000	98.303	94.314	N/A	N/A	3.990	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/20 - 05:31
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11ac-VHT80 at Channel 5210MHz	

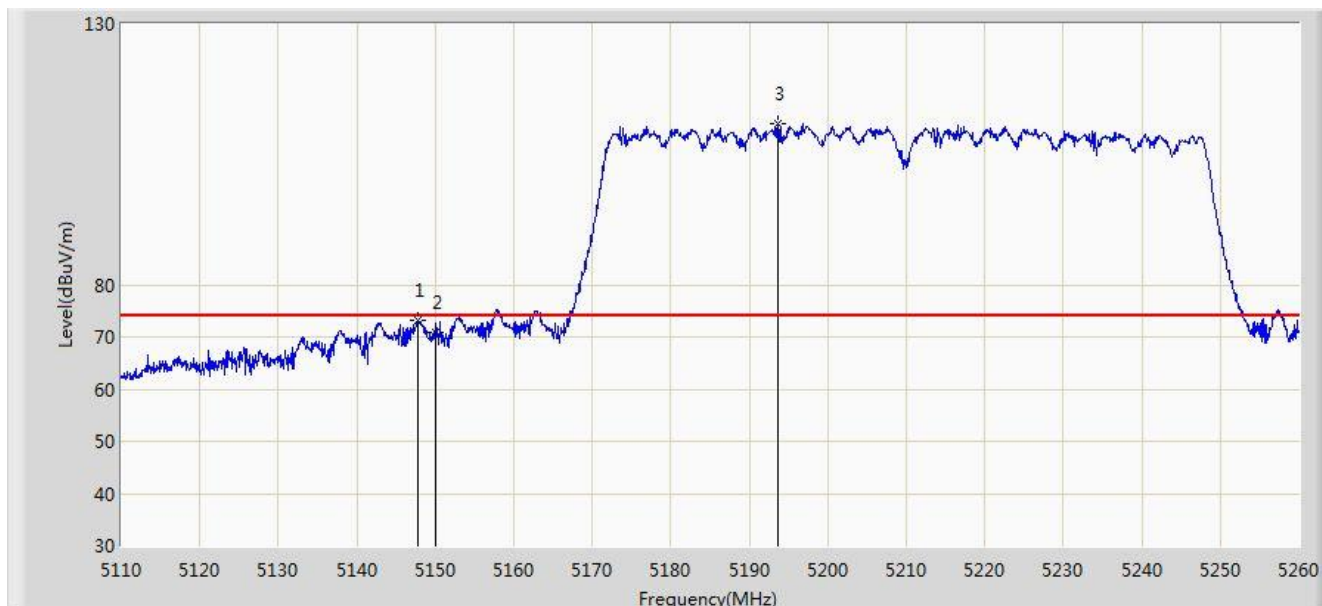


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5147.725	73.107	68.931	-0.893	74.000	4.176	PK
2			5150.000	70.788	66.619	-3.212	74.000	4.170	PK
3		*	5193.625	110.886	106.865	N/A	N/A	4.020	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/20 - 05:26
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11ac-VHT80 at Channel 5210MHz	

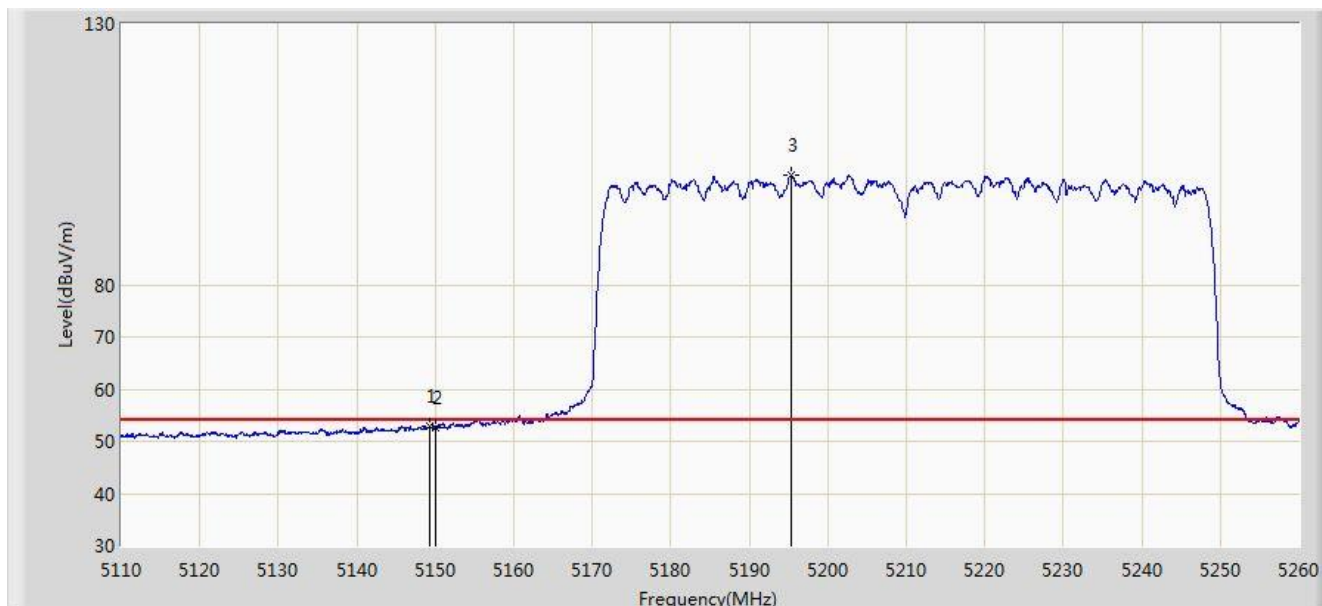


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5149.225	52.909	48.737	-1.091	54.000	4.172	AV
2			5150.000	52.741	48.572	-1.259	54.000	4.170	AV
3		*	5195.425	100.970	96.956	N/A	N/A	4.014	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/20 - 05:57
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11ac-VHT80 at Channel 5290MHz	

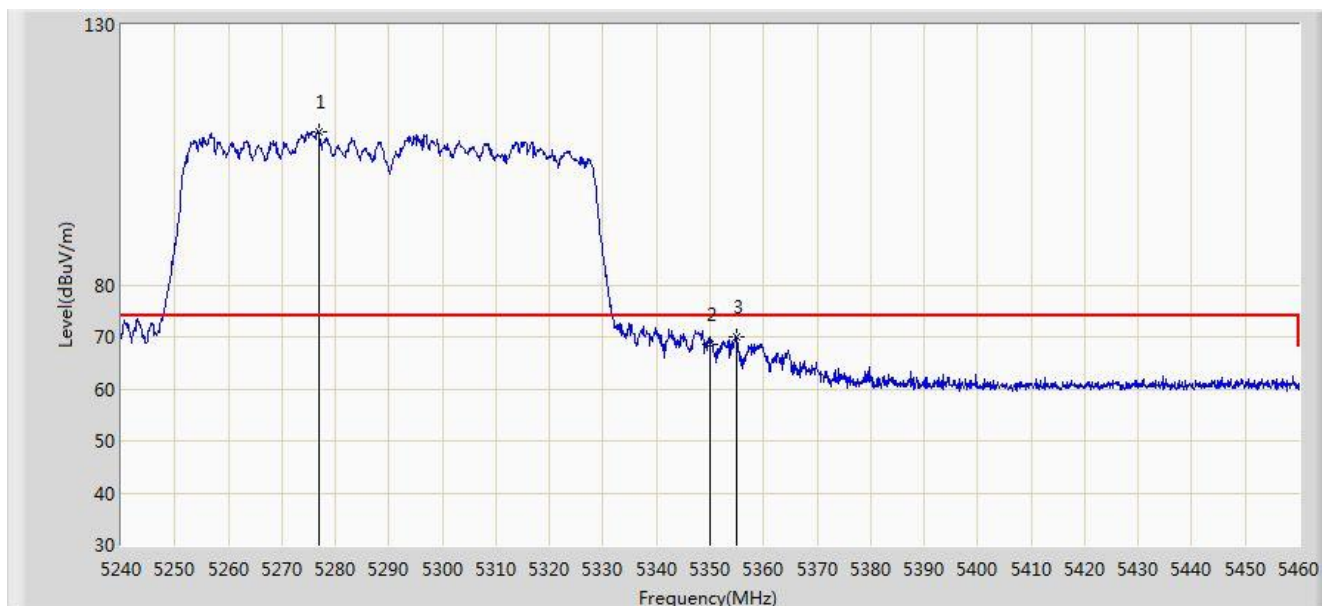


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5277.070	109.396	105.567	N/A	N/A	3.830	PK
2			5350.000	68.517	64.612	-5.483	74.000	3.904	PK
3			5354.840	69.998	66.084	-4.002	74.000	3.913	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/20 - 05:59
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11ac-VHT80 at Channel 5290MHz	

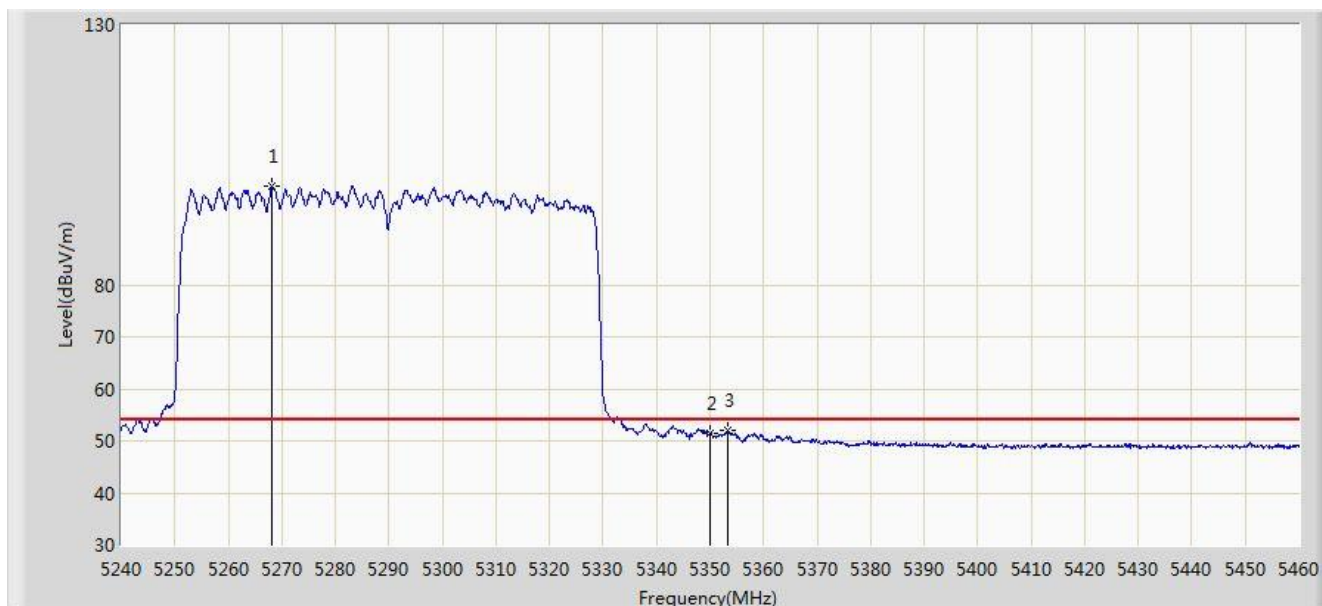


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5268.050	98.947	95.110	N/A	N/A	3.837	AV
2			5350.000	51.413	47.508	-2.587	54.000	3.904	AV
3			5353.300	51.913	48.002	-2.087	54.000	3.910	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/20 - 05:48
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11ac-VHT80 at Channel 5290MHz	

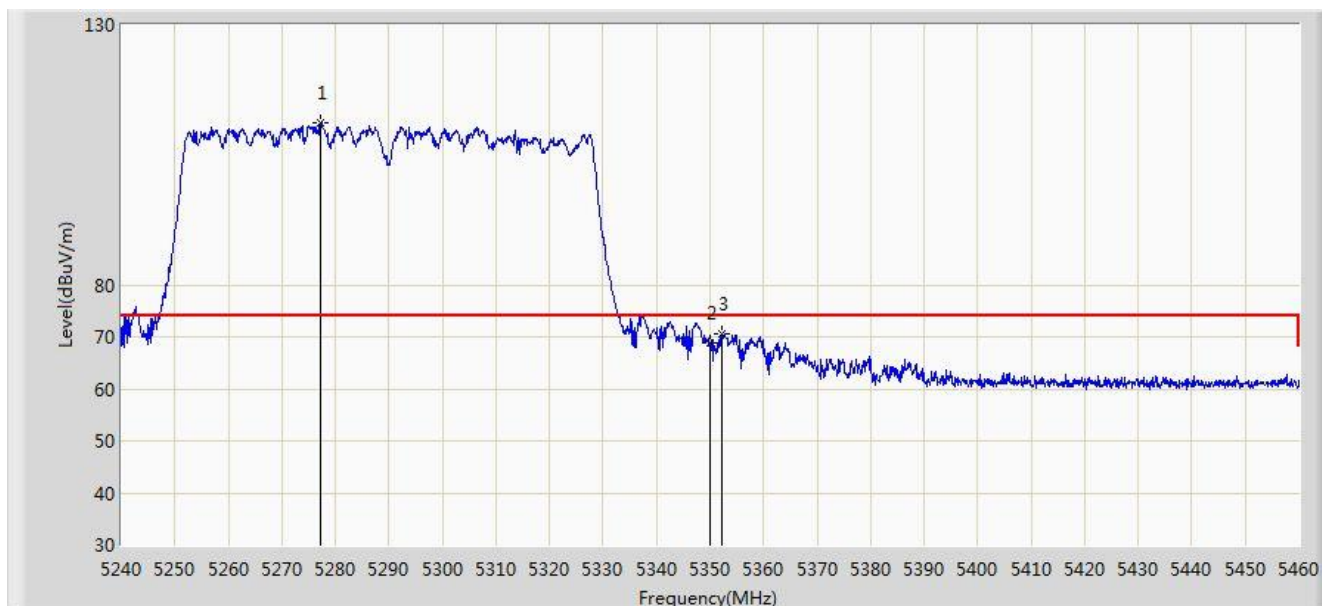


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5277.290	111.041	107.212	N/A	N/A	3.829	PK
2			5350.000	68.854	64.949	-5.146	74.000	3.904	PK
3			5352.090	70.680	66.771	-3.320	74.000	3.908	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/20 - 05:45
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11ac-VHT80 at Channel 5290MHz	

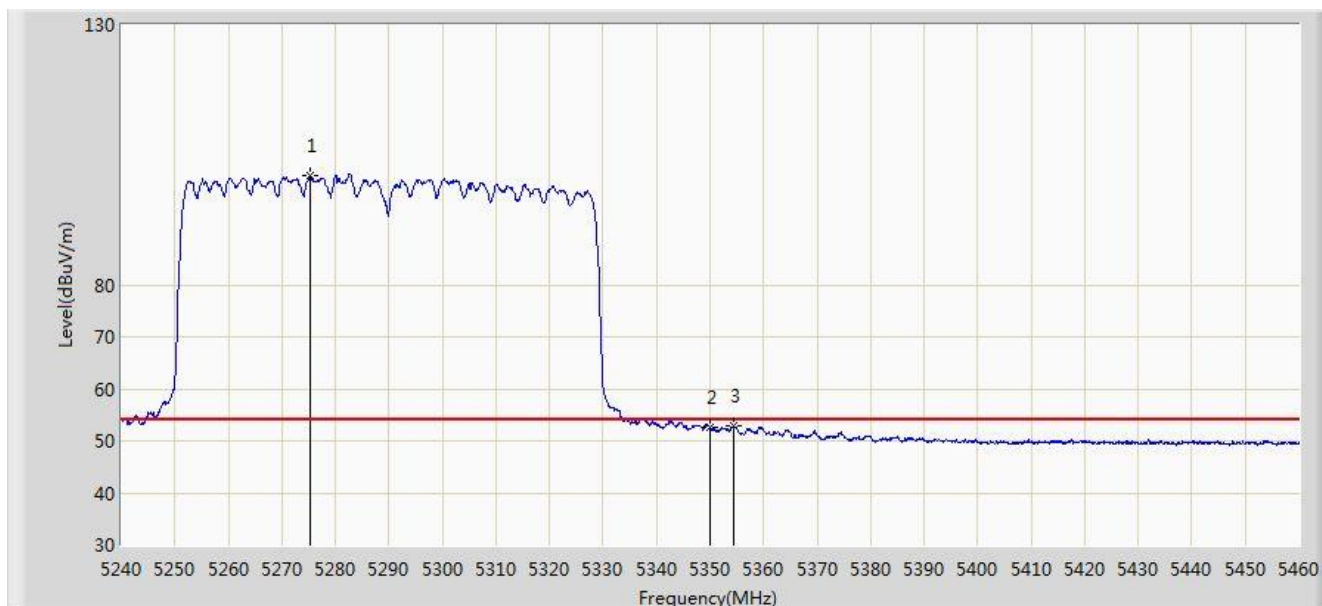


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5275.200	101.036	97.205	N/A	N/A	3.831	AV
2			5350.000	52.612	48.707	-1.388	54.000	3.904	AV
3			5354.510	52.859	48.946	-1.141	54.000	3.912	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/20 - 06:09
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11ac-VHT80 at Channel 5530MHz	

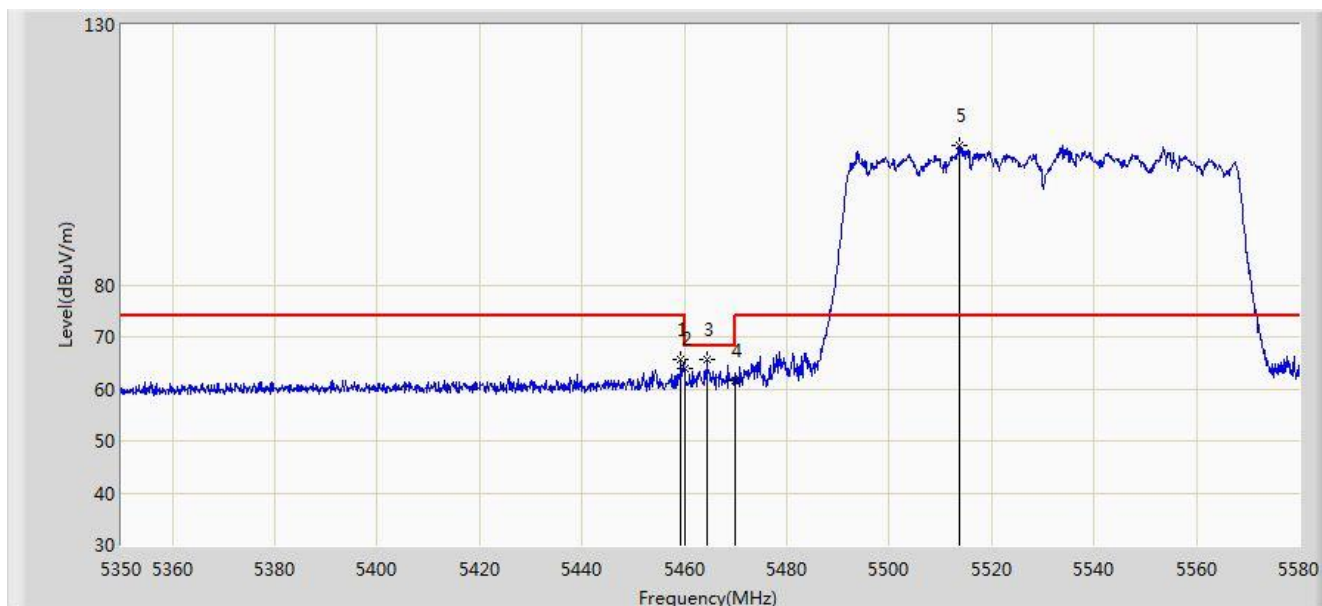


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5459.365	65.745	61.566	-8.255	74.000	4.178	PK
2			5460.000	63.969	59.789	-10.031	74.000	4.180	PK
3			5464.425	65.517	61.327	-2.683	68.200	4.190	PK
4			5470.000	61.700	57.498	-6.500	68.200	4.202	PK
5		*	5513.760	106.898	102.586	N/A	N/A	4.313	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/20 - 06:07
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11ac-VHT80 at Channel 5530MHz	

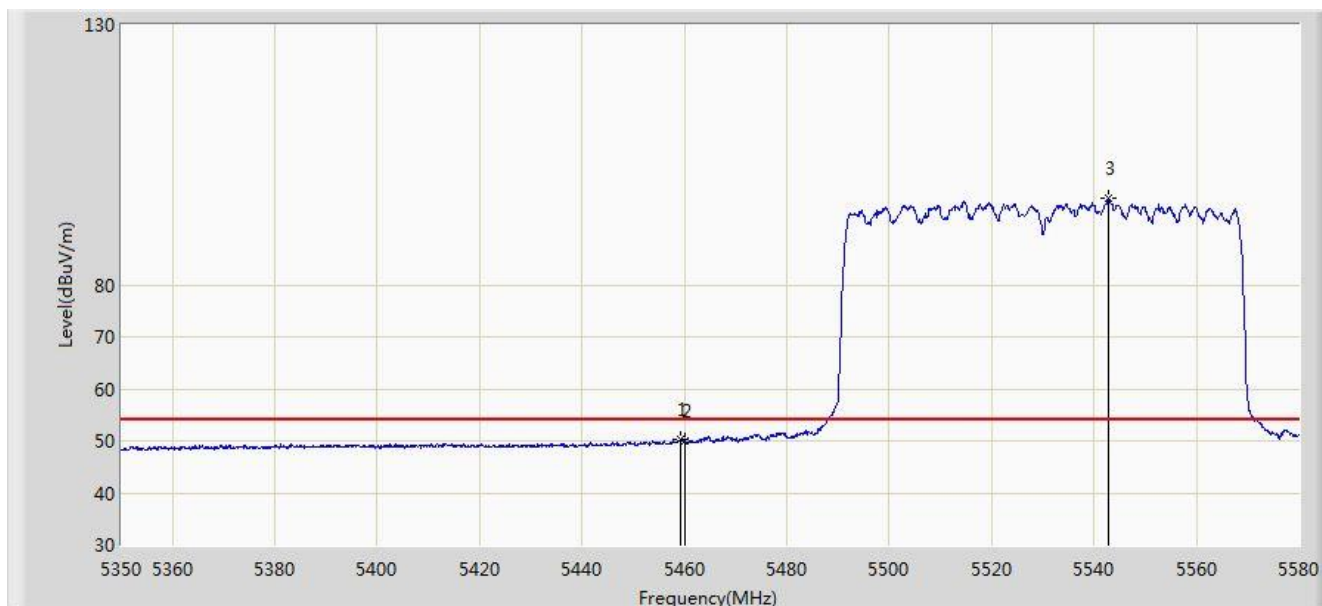


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5459.365	50.234	46.055	-3.766	54.000	4.178	AV
2			5460.000	50.106	45.926	-3.894	54.000	4.180	AV
3		*	5542.855	96.612	92.213	N/A	N/A	4.398	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/20 - 06:04
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11ac-VHT80 at Channel 5530MHz	

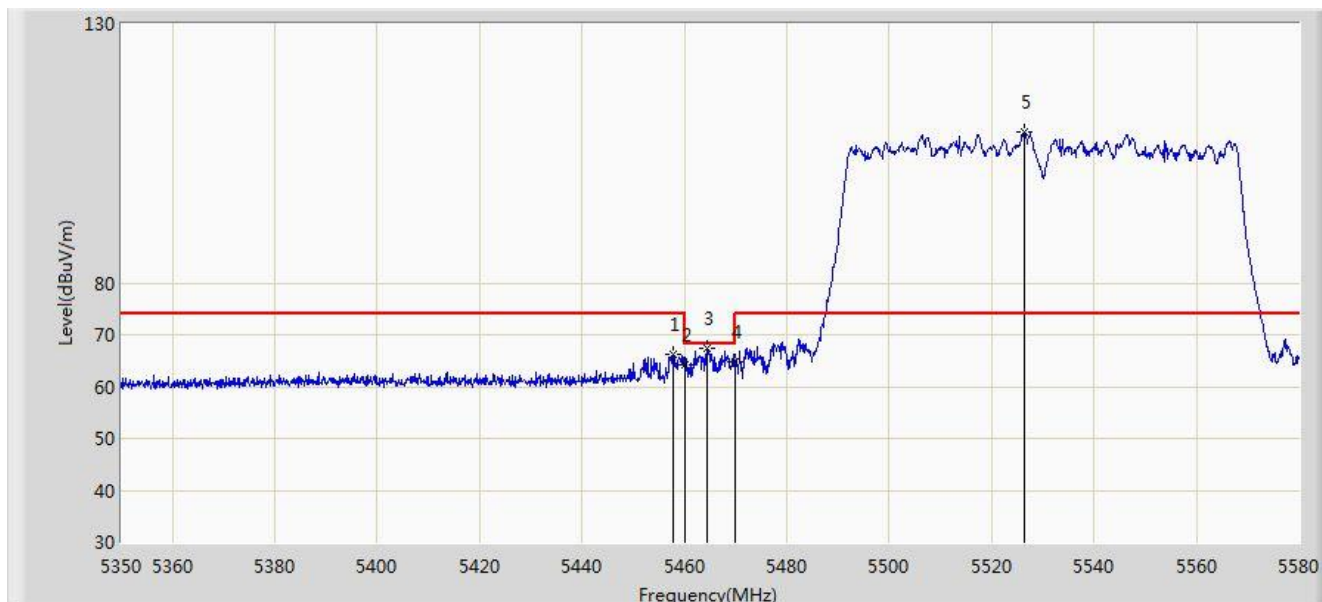


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5457.870	66.108	61.932	-7.892	74.000	4.176	PK
2			5460.000	64.061	59.881	-9.939	74.000	4.180	PK
3			5464.310	67.531	63.341	-0.669	68.200	4.190	PK
4			5470.000	64.775	60.573	-3.425	68.200	4.202	PK
5		*	5526.525	109.041	104.690	N/A	N/A	4.351	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/20 - 06:06
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11ac-VHT80 at Channel 5530MHz	

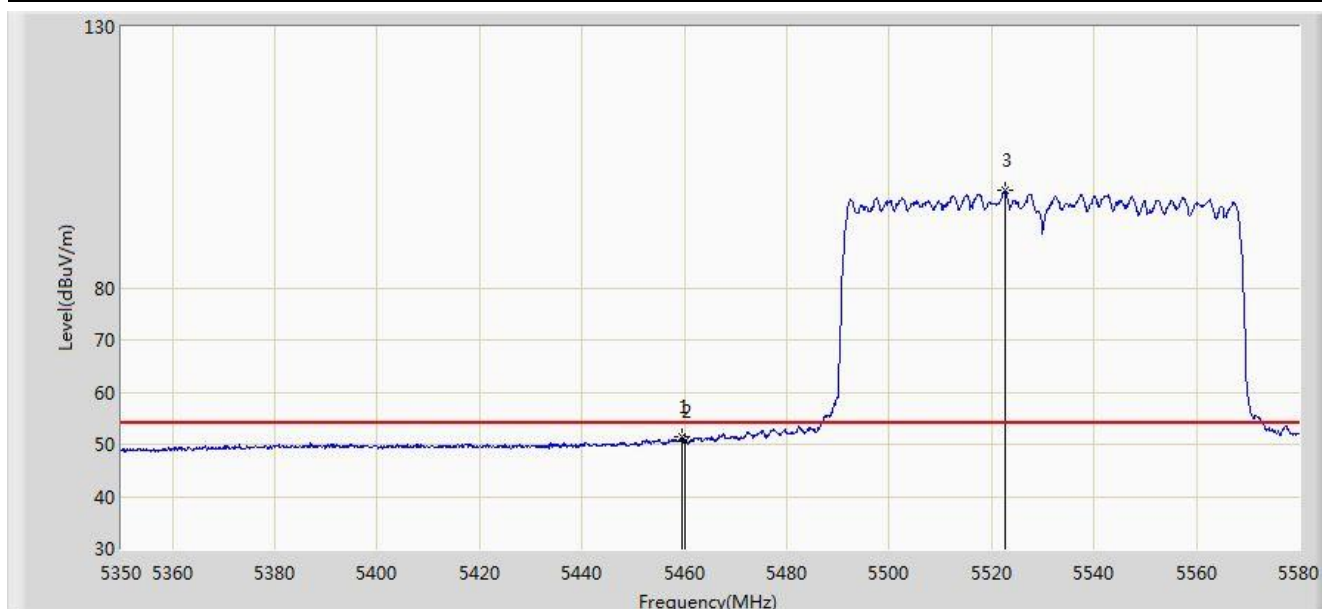


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5459.595	51.315	47.136	-2.685	54.000	4.180	AV
2			5460.000	50.714	46.534	-3.286	54.000	4.180	AV
3		*	5522.500	98.575	94.236	N/A	N/A	4.338	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/26 - 21:59
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11ac-VHT80 at Channel 5610MHz	

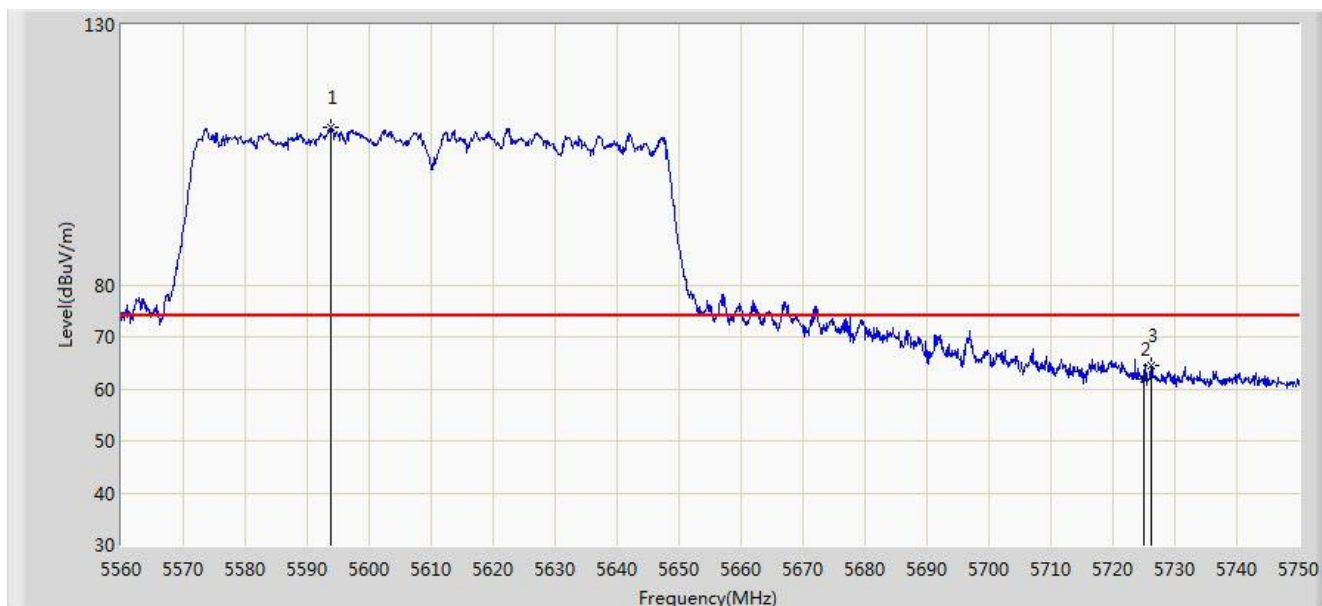


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5593.915	110.224	105.712	N/A	N/A	4.513	PK
2			5725.000	61.860	56.831	-12.140	74.000	5.029	PK
3			5726.250	64.525	59.488	-9.475	74.000	5.037	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/26 - 22:01
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11ac-VHT80 at Channel 5610MHz	

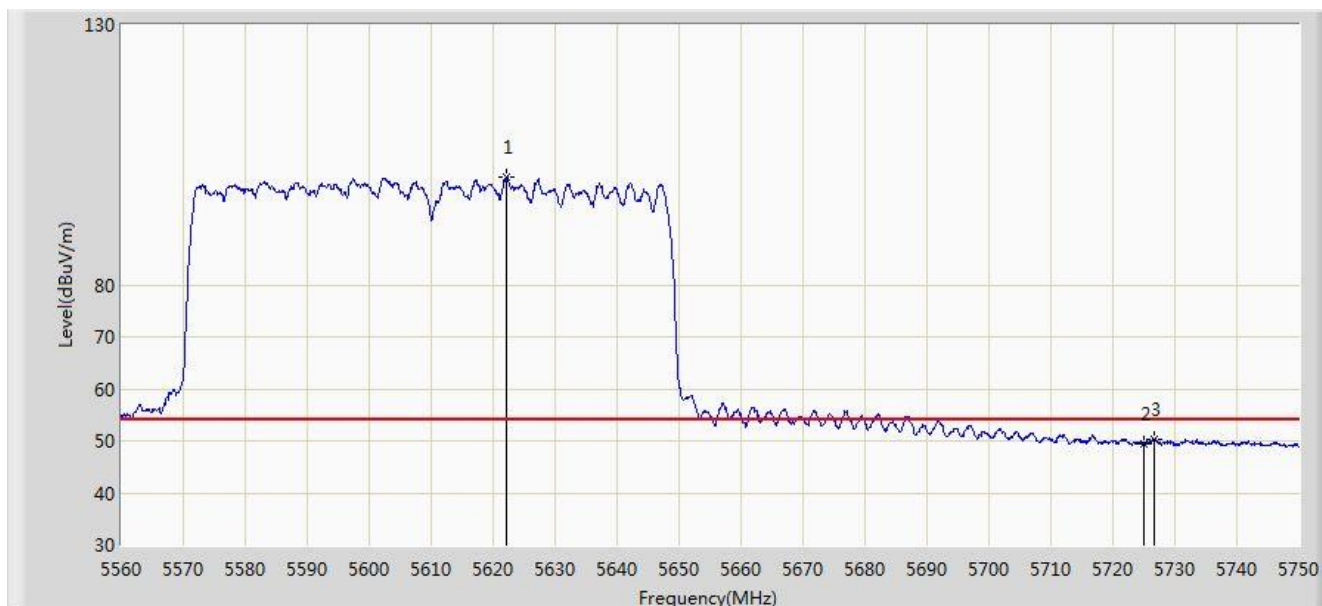


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5622.225	100.596	96.009	N/A	N/A	4.587	AV
2			5725.000	49.403	44.374	-4.597	54.000	5.029	AV
3			5726.725	50.304	45.264	-3.696	54.000	5.040	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/26 - 22:04
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11ac-VHT80 at Channel 5610MHz	

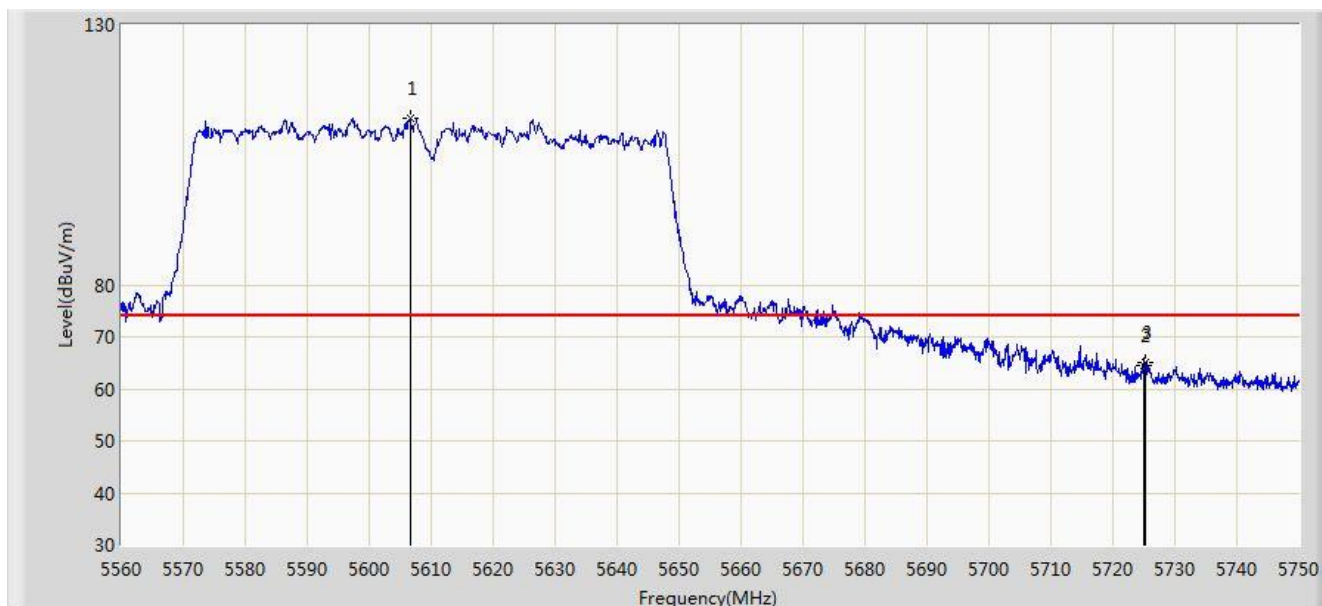


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5606.550	112.024	107.482	N/A	N/A	4.542	PK
2			5725.000	64.542	59.513	-9.458	74.000	5.029	PK
3			5725.205	65.209	60.179	-8.791	74.000	5.030	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/26 - 22:06
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11ac-VHT80 at Channel 5610MHz	

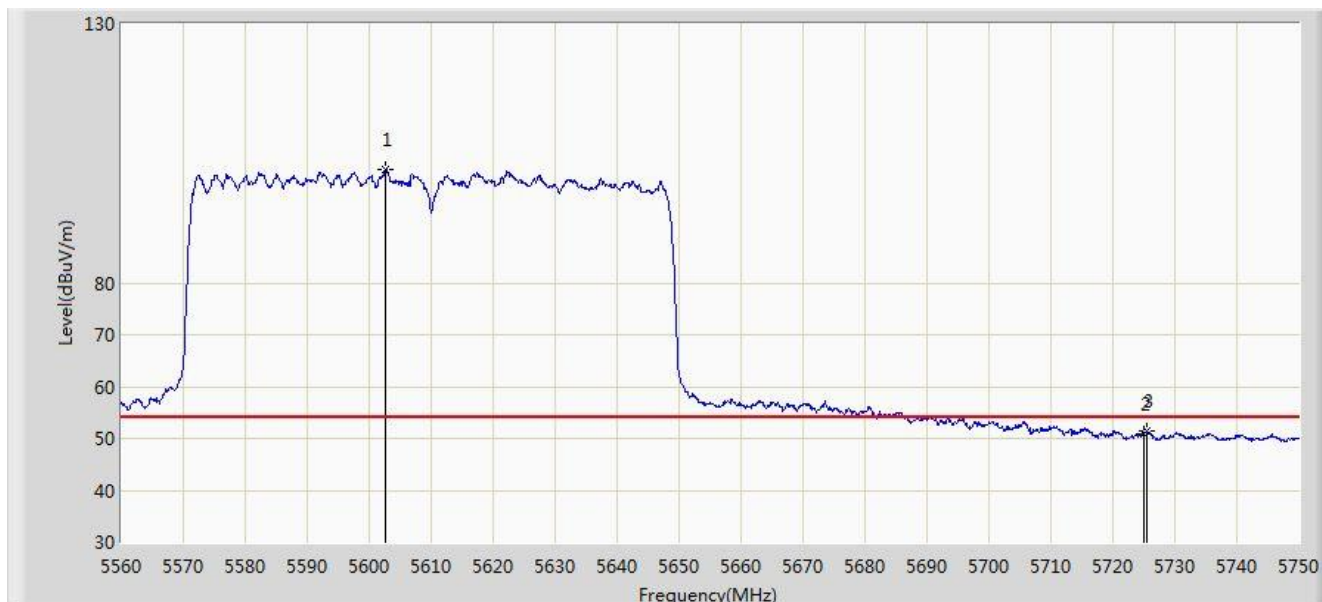


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5602.655	101.852	97.318	N/A	N/A	4.534	AV
2			5725.000	50.762	45.733	-3.238	54.000	5.029	AV
3			5725.490	51.402	46.370	-2.598	54.000	5.032	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/20 - 06:26
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11ac-VHT80 at Channel 5775MHz	

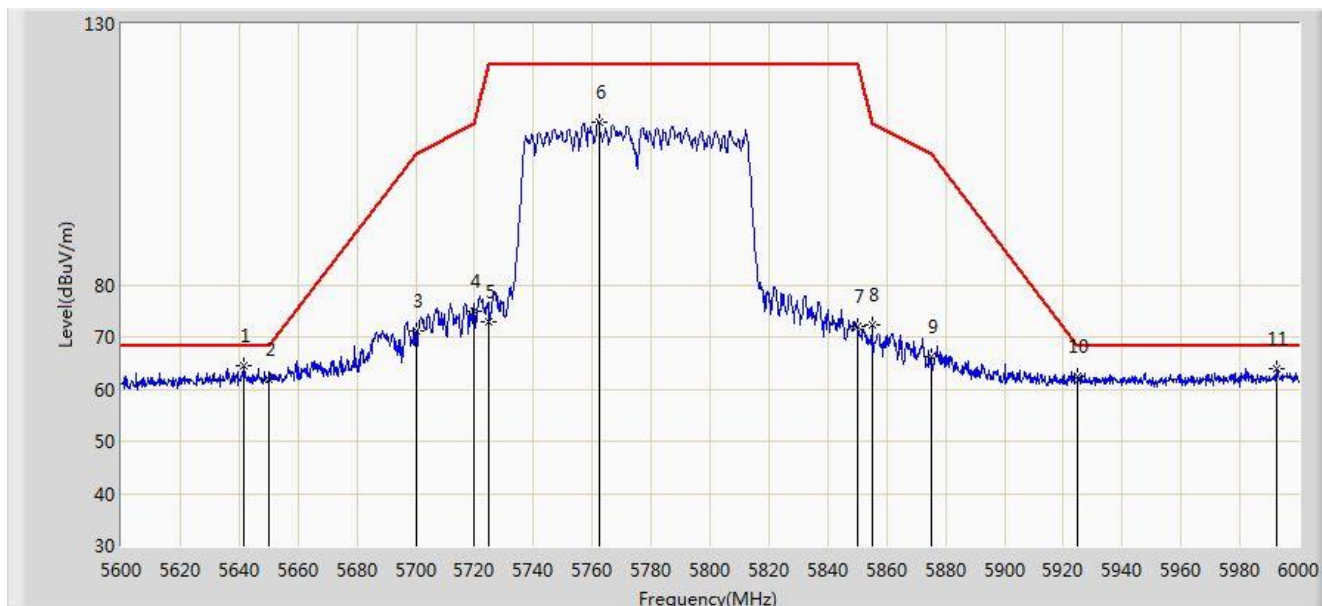


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5641.800	64.381	59.737	-3.819	68.200	4.643	PK
2			5650.000	61.863	57.192	-6.337	68.200	4.671	PK
3			5700.000	71.098	66.220	-34.102	105.200	4.878	PK
4			5720.000	74.961	69.964	-35.839	110.800	4.997	PK
5			5725.000	72.912	67.883	-49.288	122.200	5.029	PK
6			5762.200	111.286	106.035	N/A	N/A	5.251	PK
7			5850.000	71.930	66.204	-50.270	122.200	5.726	PK
8			5855.000	72.263	66.517	-38.537	110.800	5.746	PK
9			5875.000	66.201	60.381	-38.999	105.200	5.820	PK
10			5925.000	62.393	56.427	-5.807	68.200	5.967	PK
11			5992.600	63.917	57.819	-4.283	68.200	6.098	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/20 - 06:28
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11ac-VHT80 at Channel 5775MHz	

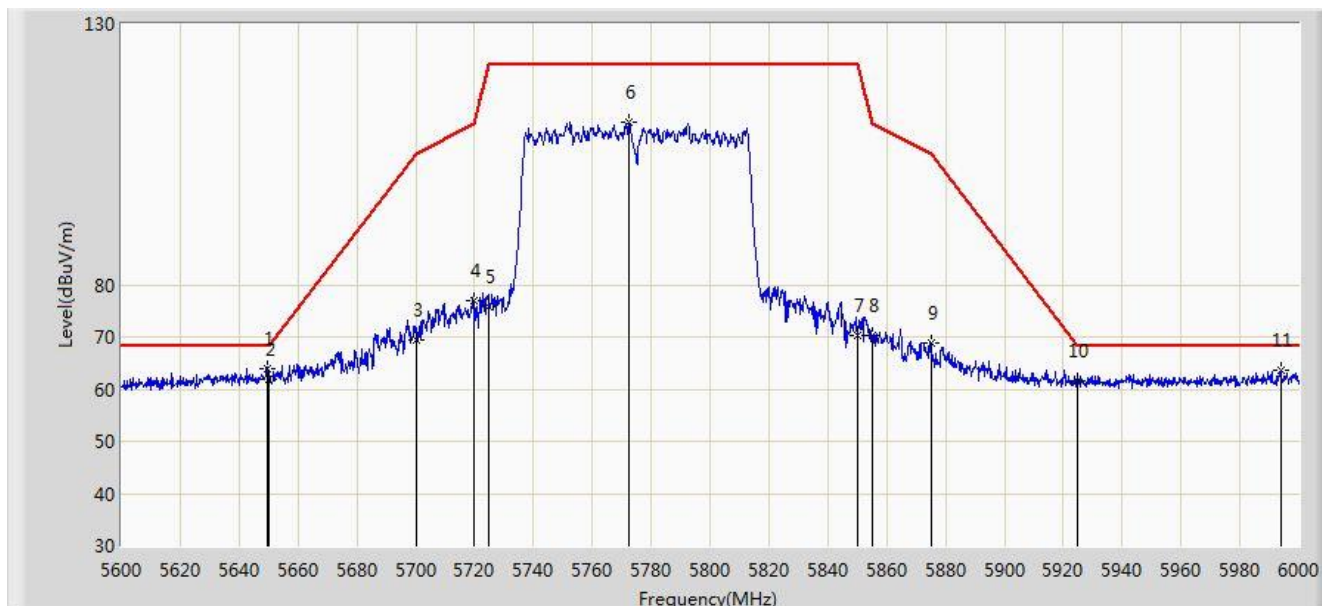


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5649.400	64.057	59.388	-4.143	68.200	4.669	PK
2			5650.000	61.937	57.266	-6.263	68.200	4.671	PK
3			5700.000	69.402	64.524	-35.798	105.200	4.878	PK
4			5720.000	77.047	72.050	-33.753	110.800	4.997	PK
5			5725.000	75.913	70.884	-46.287	122.200	5.029	PK
6			5772.400	111.103	105.800	N/A	N/A	5.303	PK
7			5850.000	70.150	64.424	-52.050	122.200	5.726	PK
8			5855.000	70.304	64.558	-40.496	110.800	5.746	PK
9			5875.000	68.904	63.084	-36.296	105.200	5.820	PK
10			5925.000	61.732	55.766	-6.468	68.200	5.967	PK
11			5994.000	63.533	57.433	-4.667	68.200	6.101	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/21 - 04:05
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11ac-VHT160 at Channel 5250MHz	

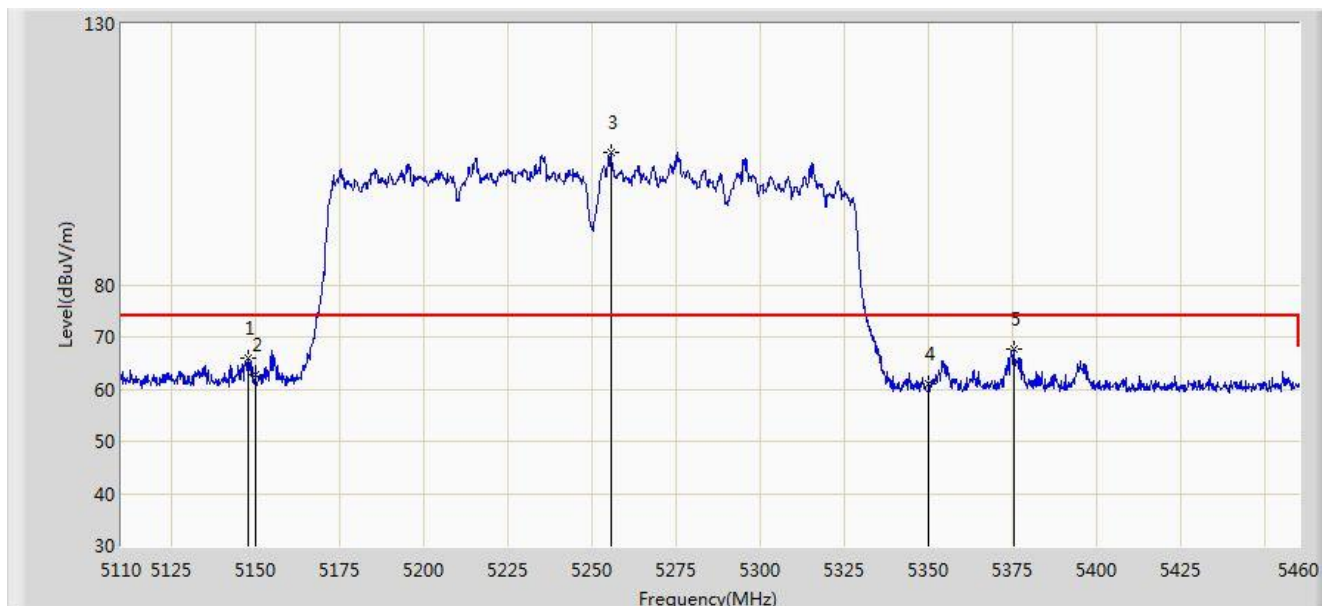


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5147.625	66.017	61.841	-7.983	74.000	4.176	PK
2			5150.000	62.803	58.634	-11.197	74.000	4.170	PK
3		*	5255.425	105.253	101.407	N/A	N/A	3.847	PK
4			5350.000	61.074	57.169	-12.926	74.000	3.904	PK
5			5375.300	67.677	63.726	-6.323	74.000	3.950	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/21 - 04:06
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11ac-VHT160 at Channel 5250MHz	

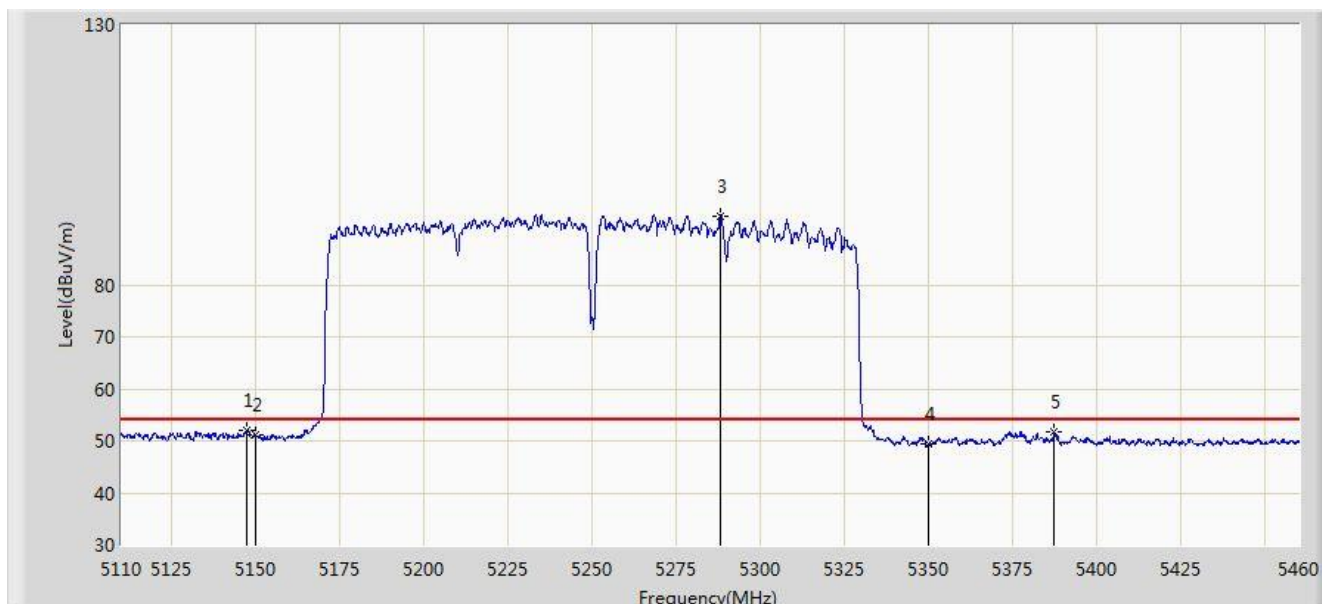


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5147.275	52.105	47.929	-1.895	54.000	4.176	AV
2			5150.000	51.031	46.862	-2.969	54.000	4.170	AV
3		*	5287.975	93.277	89.456	N/A	N/A	3.822	AV
4			5350.000	49.415	45.510	-4.585	54.000	3.904	AV
5			5387.375	51.835	47.862	-2.165	54.000	3.973	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/21 - 04:04
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11ac-VHT160 at Channel 5250MHz	

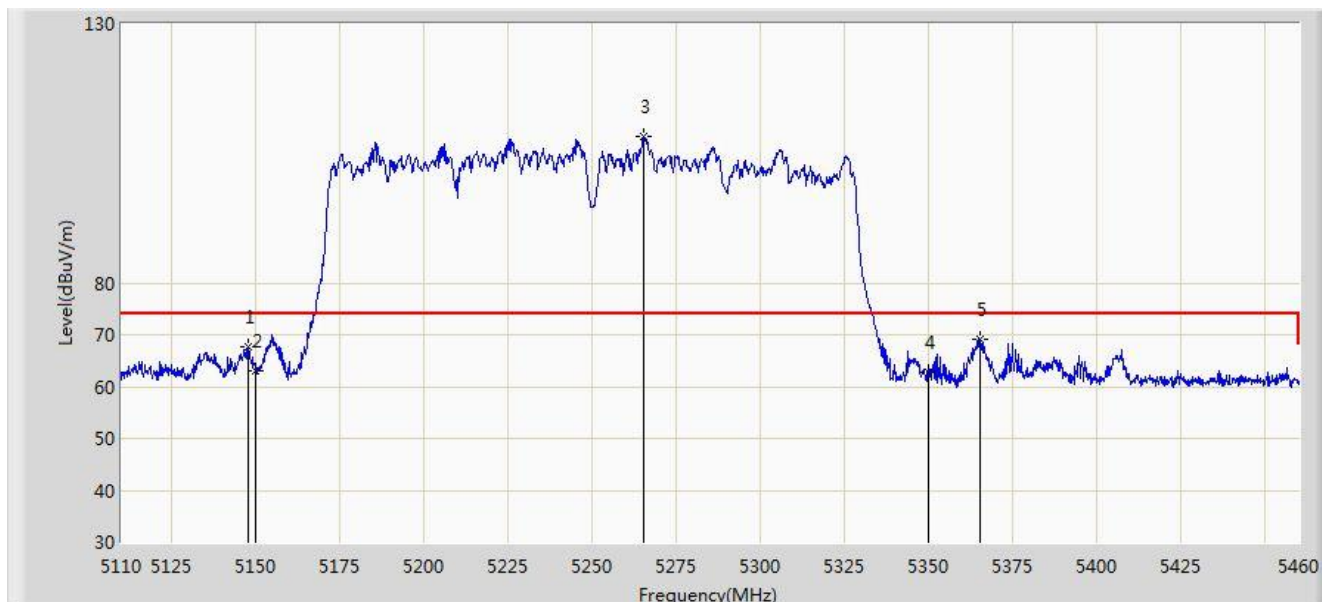


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5147.800	67.635	63.459	-6.365	74.000	4.176	PK
2			5150.000	63.105	58.936	-10.895	74.000	4.170	PK
3		*	5265.050	108.159	104.320	N/A	N/A	3.839	PK
4			5350.000	62.802	58.897	-11.198	74.000	3.904	PK
5			5365.150	68.999	65.067	-5.001	74.000	3.932	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/21 - 04:03
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11ac-VHT160 at Channel 5250MHz	

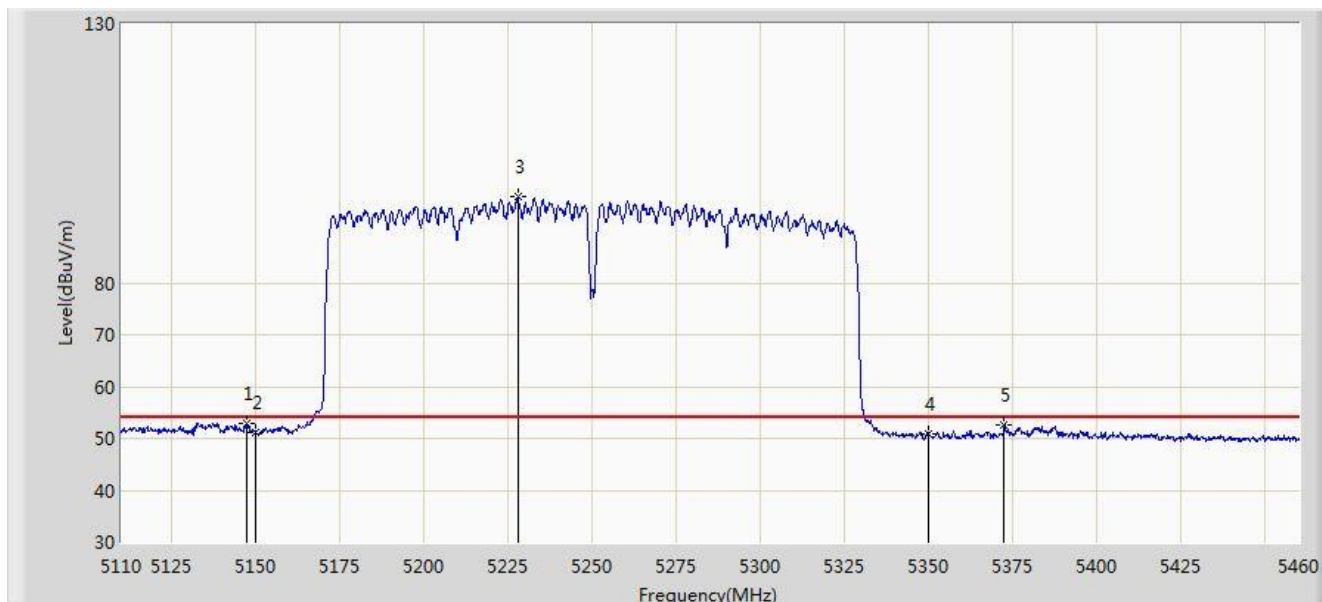


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5147.275	53.007	48.831	-0.993	54.000	4.176	AV
2			5150.000	51.229	47.060	-2.771	54.000	4.170	AV
3		*	5227.775	96.641	92.725	N/A	N/A	3.916	AV
4			5350.000	50.828	46.923	-3.172	54.000	3.904	AV
5			5372.325	52.726	48.781	-1.274	54.000	3.945	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/21 - 04:20
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11ac-VHT160 at Channel 5570MHz	

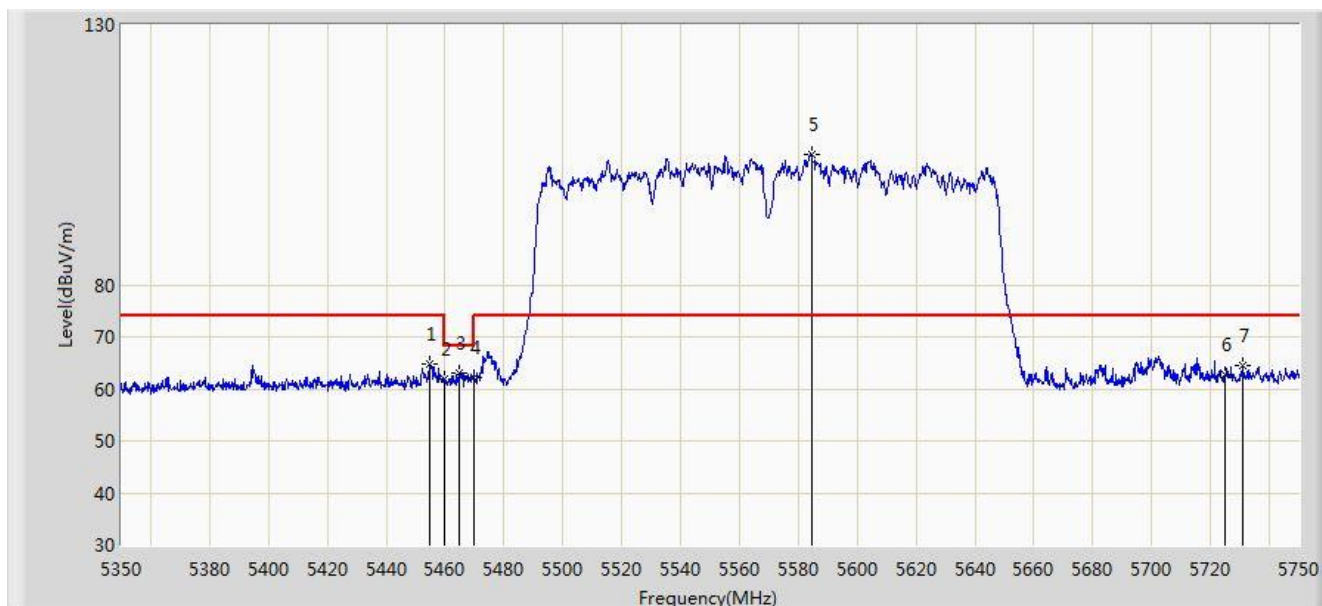


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5454.600	64.756	60.587	-9.244	74.000	4.169	PK
2			5460.000	61.779	57.599	-12.221	74.000	4.180	PK
3			5464.600	63.132	58.942	-5.068	68.200	4.191	PK
4			5470.000	62.104	57.902	-6.096	68.200	4.202	PK
5		*	5584.400	105.074	100.582	N/A	N/A	4.492	PK
6			5725.000	62.800	57.771	-11.200	74.000	5.029	PK
7			5731.200	64.537	59.468	-9.463	74.000	5.069	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/21 - 04:19
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11ac-VHT160 at Channel 5570MHz	

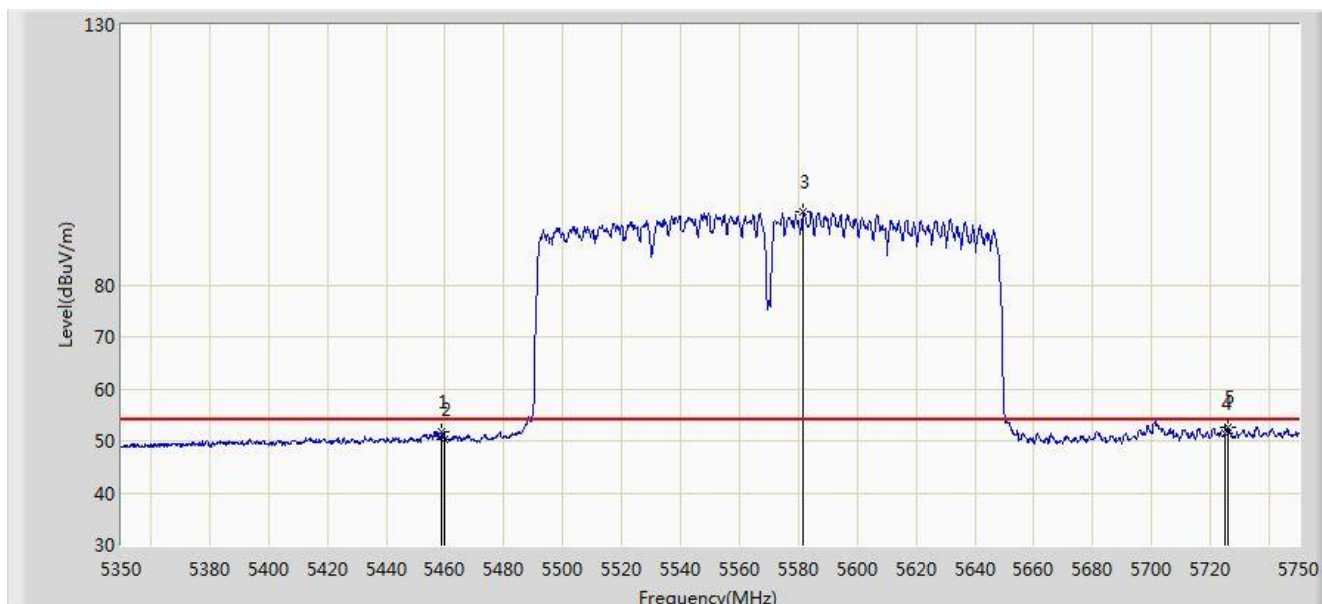


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5459.000	51.763	47.585	-2.237	54.000	4.178	AV
2			5460.000	50.366	46.186	-3.634	54.000	4.180	AV
3		*	5581.600	94.185	89.699	N/A	N/A	4.485	AV
4			5725.000	51.548	46.519	-2.452	54.000	5.029	AV
5			5726.000	52.650	47.615	-1.350	54.000	5.036	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/21 - 04:15
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11ac-VHT160 at Channel 5570MHz	

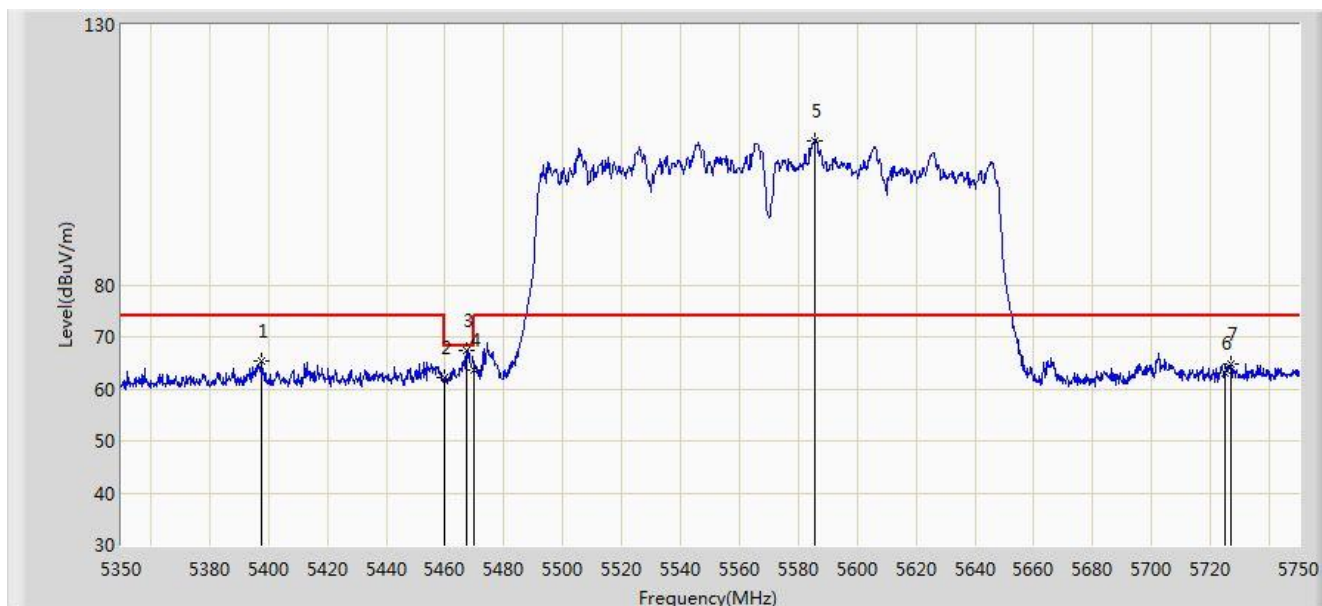


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5397.800	65.468	61.472	-8.532	74.000	3.995	PK
2			5460.000	62.167	57.987	-11.833	74.000	4.180	PK
3			5467.400	67.420	63.223	-0.780	68.200	4.196	PK
4			5470.000	63.694	59.492	-4.506	68.200	4.202	PK
5		*	5585.600	107.799	103.305	N/A	N/A	4.495	PK
6			5725.000	63.024	57.995	-10.976	74.000	5.029	PK
7			5726.800	64.874	59.833	-9.126	74.000	5.040	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/21 - 04:18
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11ac-VHT160 at Channel 5570MHz	

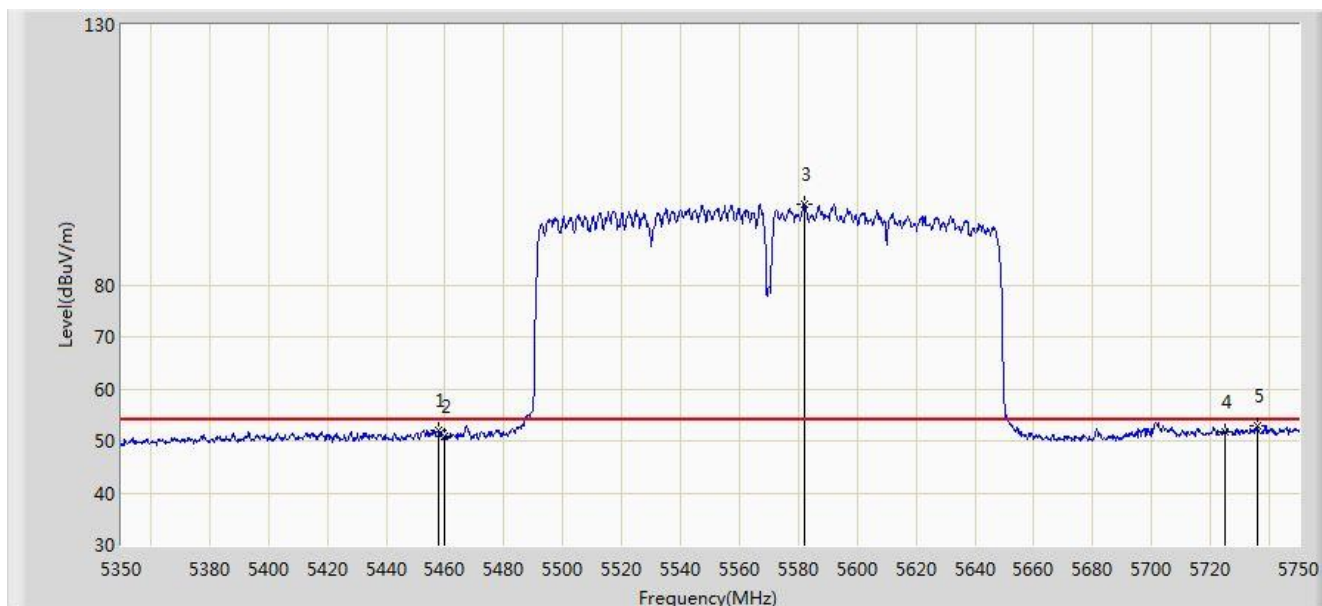


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5457.800	52.130	47.954	-1.870	54.000	4.176	AV
2			5460.000	50.818	46.638	-3.182	54.000	4.180	AV
3		*	5582.000	95.607	91.120	N/A	N/A	4.487	AV
4			5725.000	51.806	46.777	-2.194	54.000	5.029	AV
5			5735.800	52.930	47.832	-1.070	54.000	5.098	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/20 - 06:41
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11ax-HE20 at Channel 5180MHz	

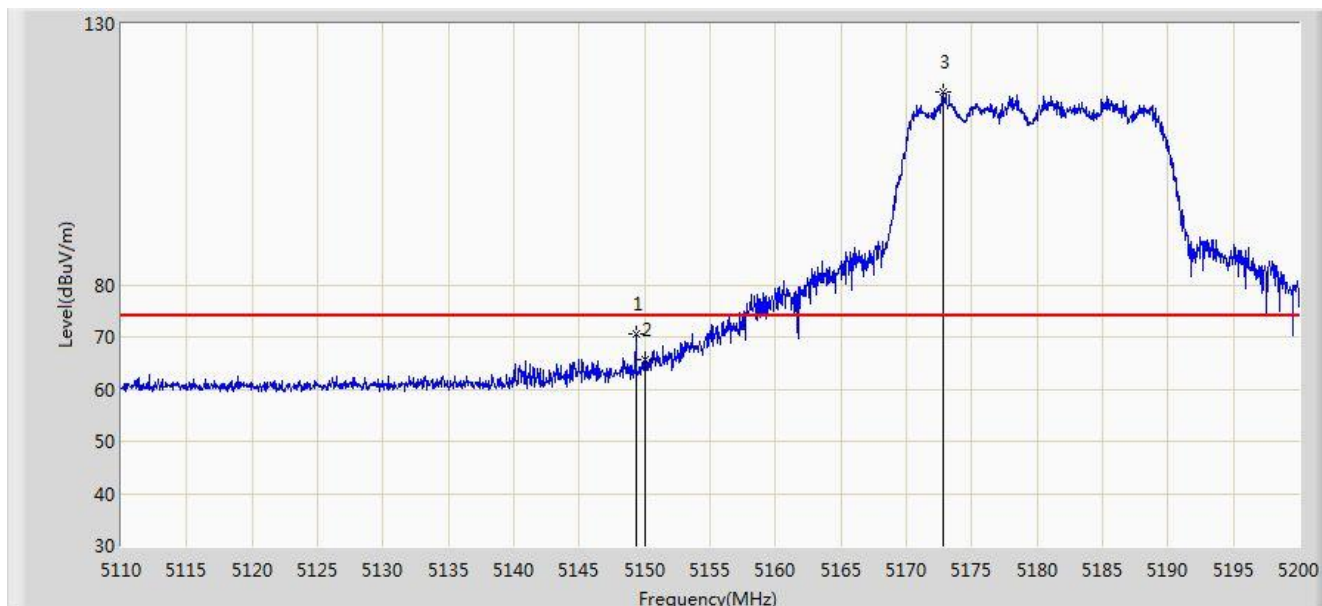


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5149.330	70.473	66.302	-3.527	74.000	4.171	PK
2			5150.000	65.706	61.537	-8.294	74.000	4.170	PK
3		*	5172.775	116.885	112.791	N/A	N/A	4.094	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/20 - 06:42
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11ax-HE20 at Channel 5180MHz	

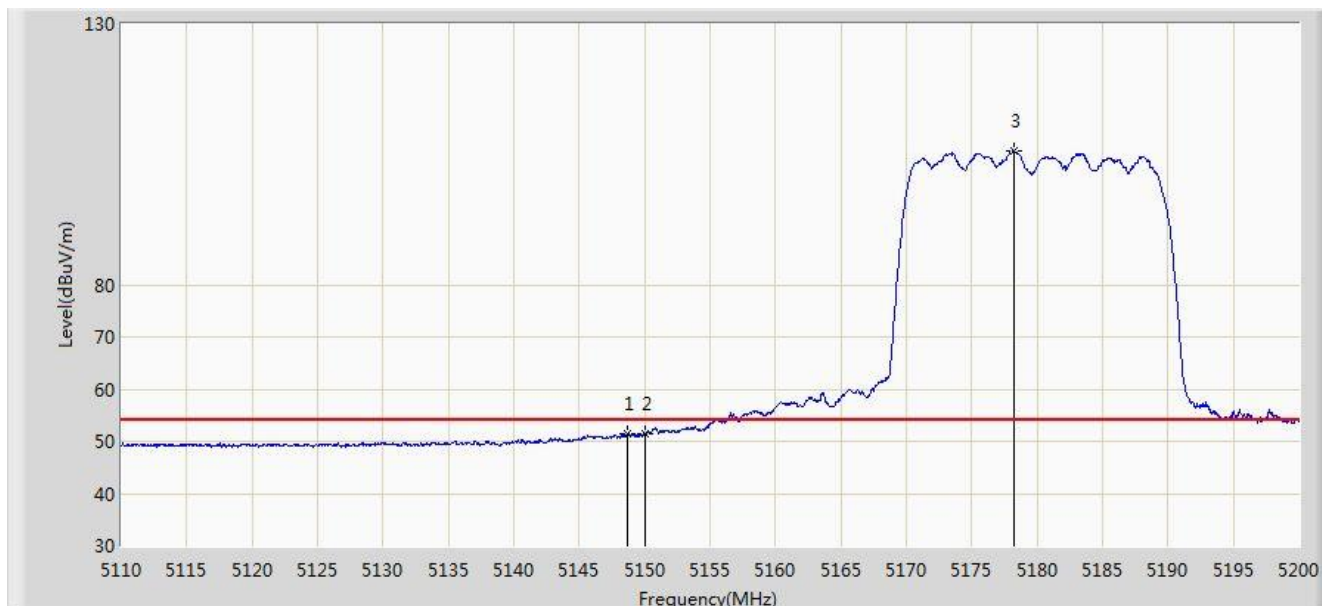


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5148.700	51.555	47.382	-2.445	54.000	4.174	AV
2			5150.000	51.395	47.226	-2.605	54.000	4.170	AV
3		*	5178.220	105.622	101.547	N/A	N/A	4.075	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/20 - 06:40
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11ax-HE20 at Channel 5180MHz	

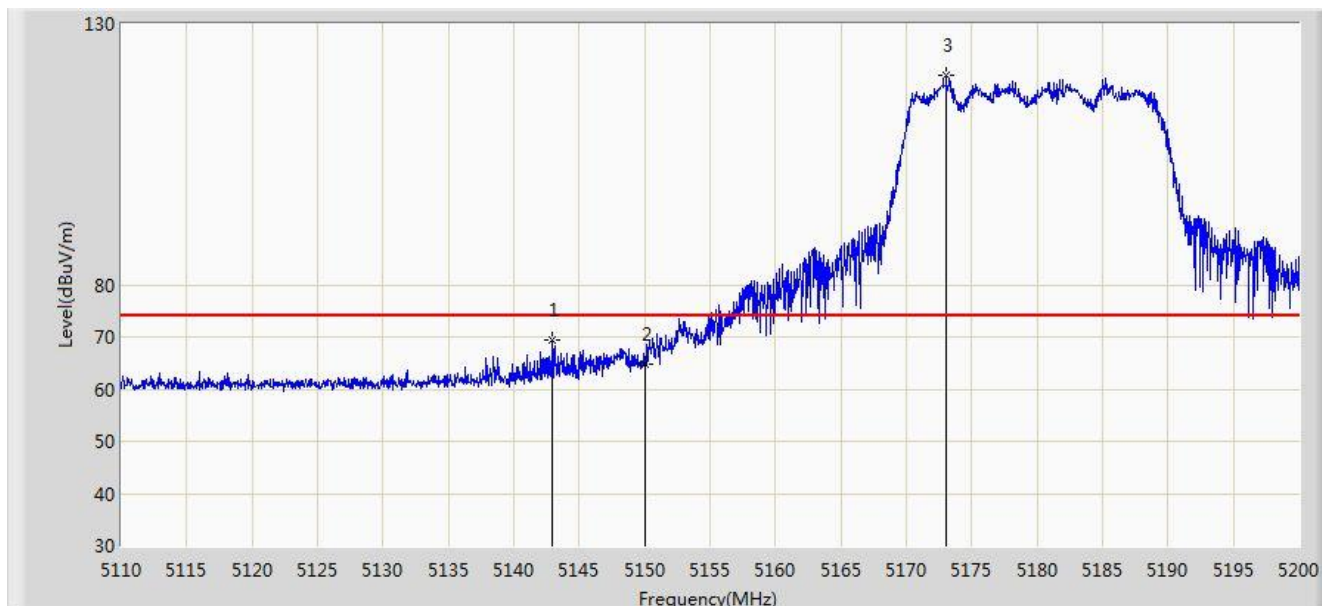


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5142.940	69.363	65.187	-4.637	74.000	4.176	PK
2			5150.000	64.740	60.571	-9.260	74.000	4.170	PK
3		*	5173.045	120.152	116.058	N/A	N/A	4.094	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/20 - 06:38
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11ax-HE20 at Channel 5180MHz	

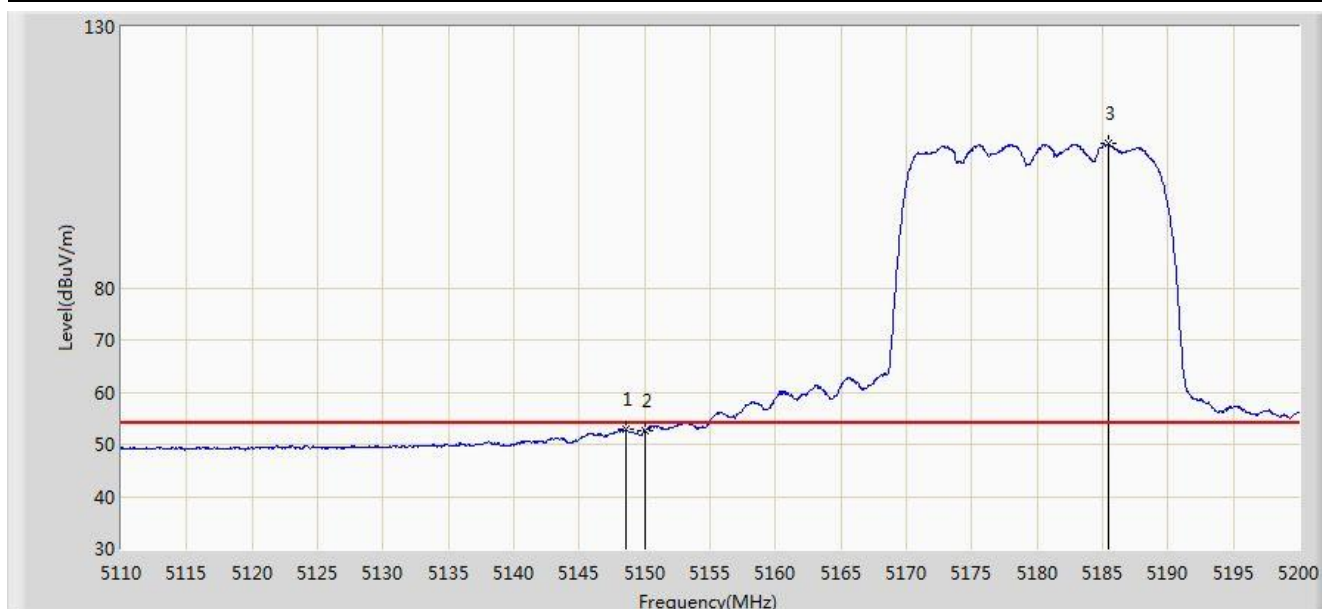

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5148.565	52.774	48.600	-1.226	54.000	4.173	AV
2			5150.000	52.604	48.435	-1.396	54.000	4.170	AV
3		*	5185.465	107.557	103.507	N/A	N/A	4.049	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/26 - 22:10
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11ax-HE20 at Channel 5320MHz	




No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5313.040	117.521	113.685	N/A	N/A	3.836	PK
2			5350.000	65.825	61.920	-8.175	74.000	3.904	PK
3			5355.600	68.420	64.505	-5.580	74.000	3.915	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/26 - 22:13
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11ax-HE20 at Channel 5320MHz	

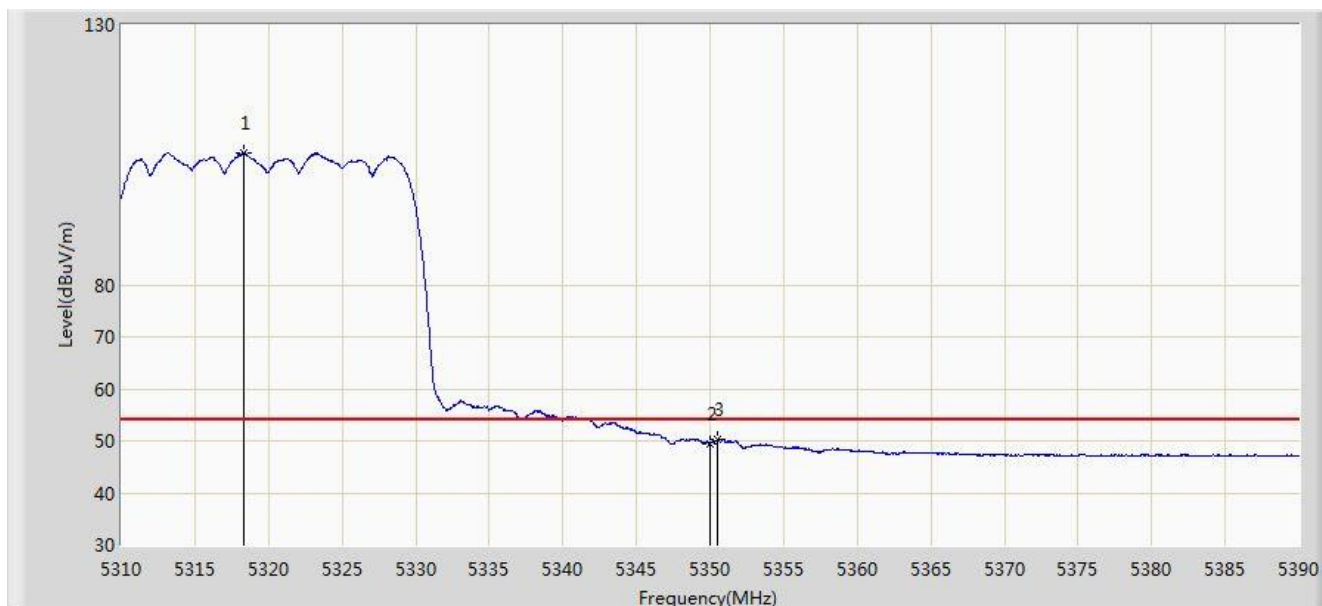


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5318.320	105.339	101.494	N/A	N/A	3.845	AV
2			5350.000	49.419	45.514	-4.581	54.000	3.904	AV
3			5350.520	50.254	46.348	-3.746	54.000	3.906	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/26 - 22:16
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11ax-HE20 at Channel 5320MHz	

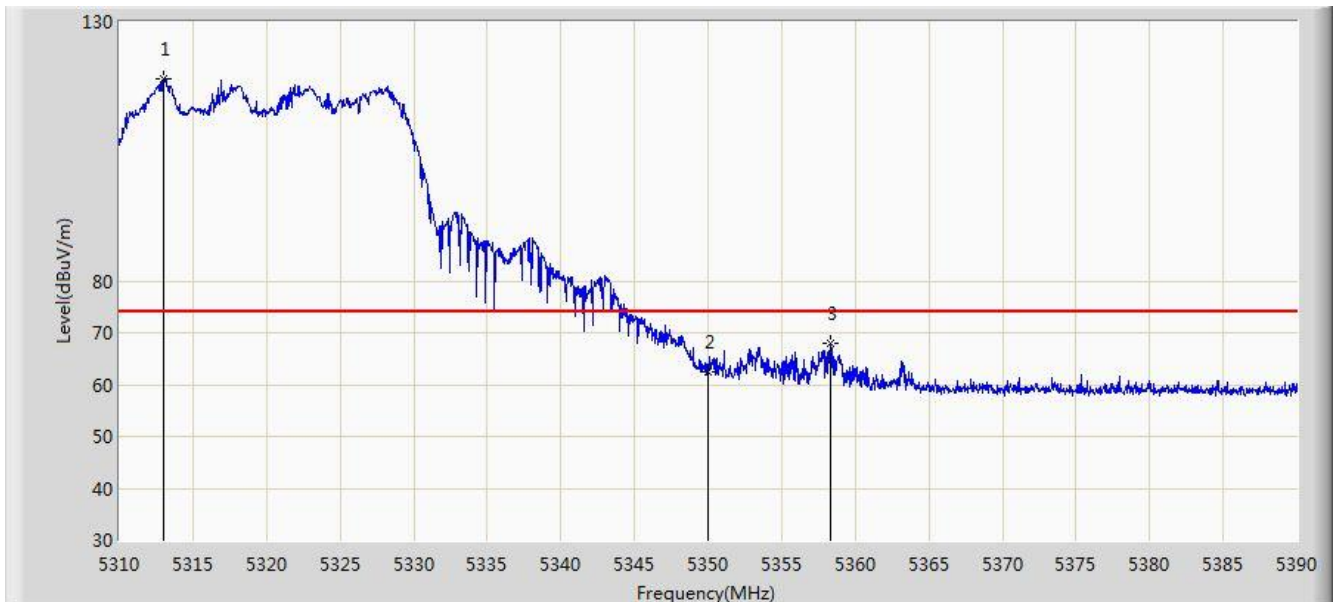


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5312.960	118.990	115.155	N/A	N/A	3.836	PK
2			5350.000	62.587	58.682	-11.413	74.000	3.904	PK
3			5358.280	67.873	63.953	-6.127	74.000	3.919	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/26 - 22:17
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11ax-HE20 at Channel 5320MHz	

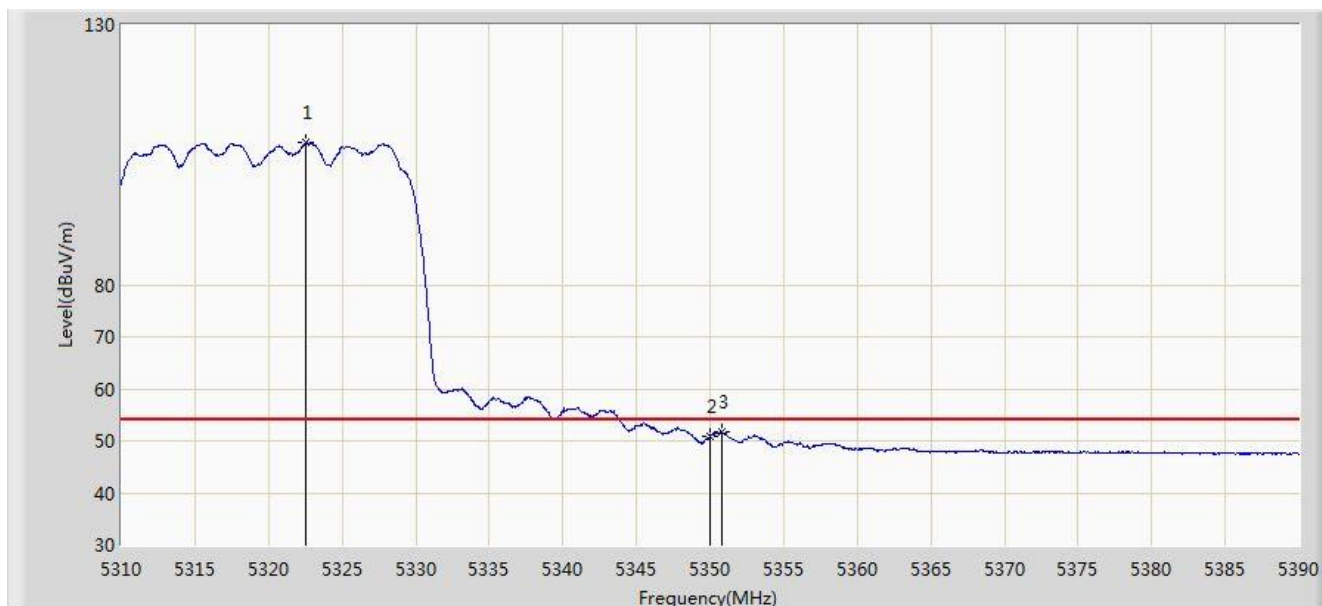


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5322.560	107.310	103.457	N/A	N/A	3.853	AV
2			5350.000	50.946	47.041	-3.054	54.000	3.904	AV
3			5350.760	51.785	47.879	-2.215	54.000	3.906	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/20 - 07:00
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11ax-HE20 at Channel 5500MHz	

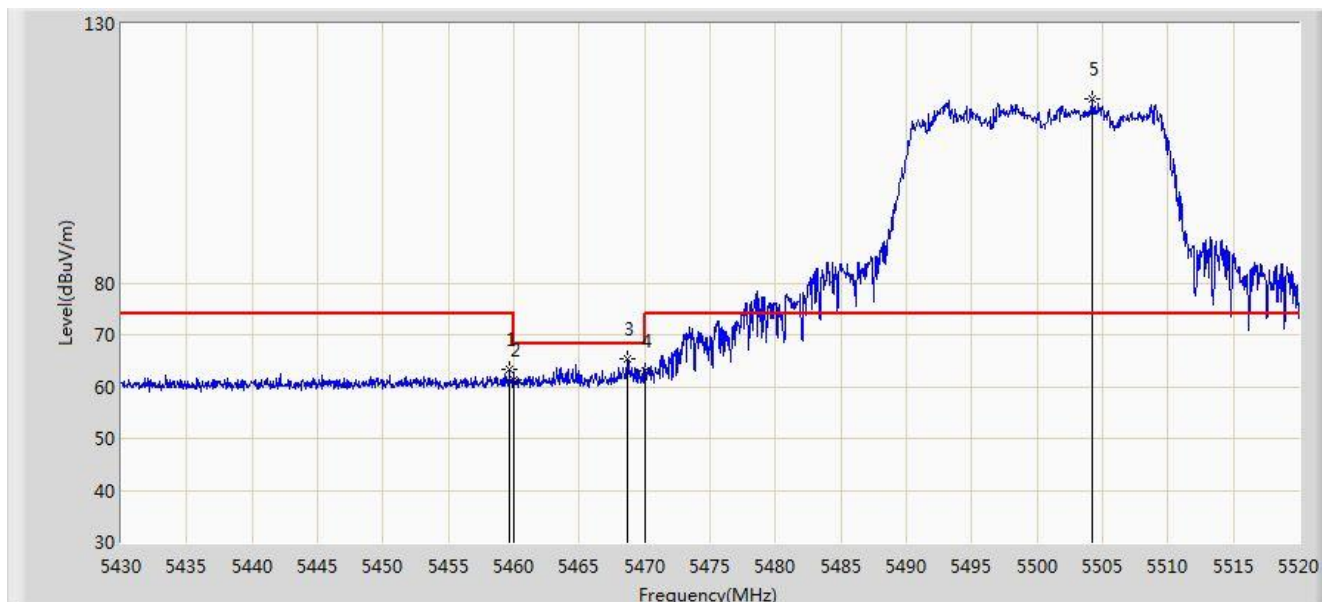


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5459.655	63.349	59.169	-10.651	74.000	4.180	PK
2			5460.000	61.344	57.164	-12.656	74.000	4.180	PK
3			5468.655	65.459	61.260	-2.741	68.200	4.199	PK
4			5470.000	63.024	58.822	-5.176	68.200	4.202	PK
5		*	5504.205	115.596	111.312	N/A	N/A	4.284	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/20 - 07:01
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11ax-HE20 at Channel 5500MHz	

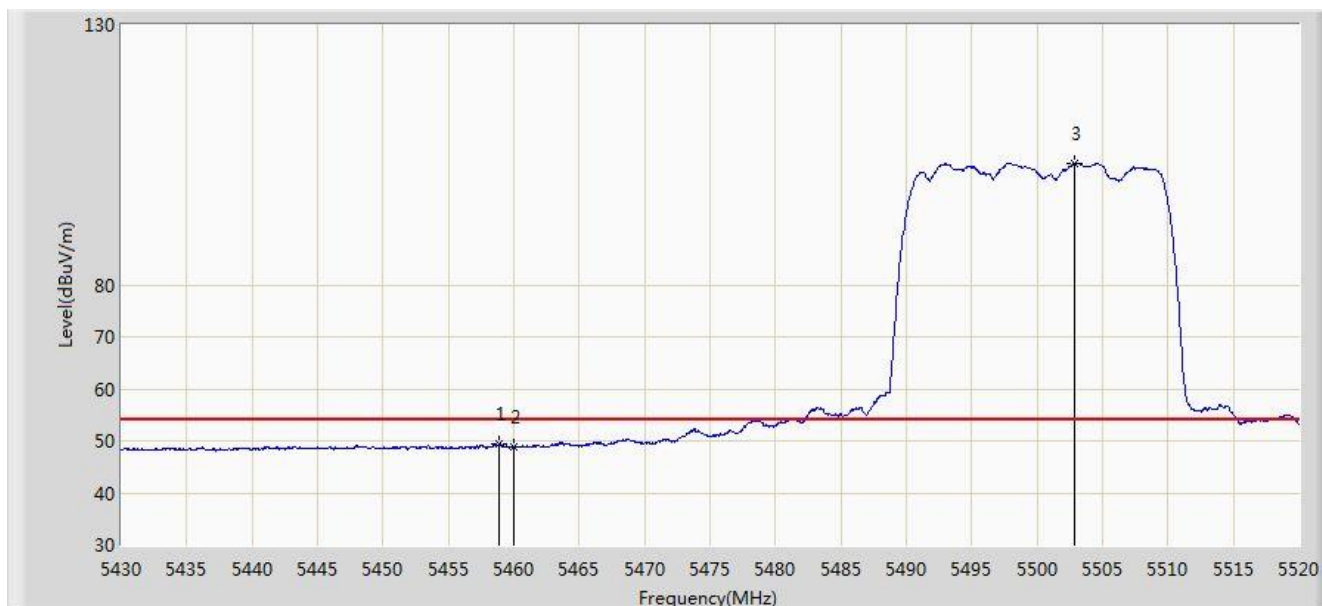


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5458.890	49.361	45.183	-4.639	54.000	4.178	AV
2			5460.000	48.707	44.527	-5.293	54.000	4.180	AV
3		*	5502.900	103.407	99.126	N/A	N/A	4.281	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/20 - 06:58
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11ax-HE20 at Channel 5500MHz	

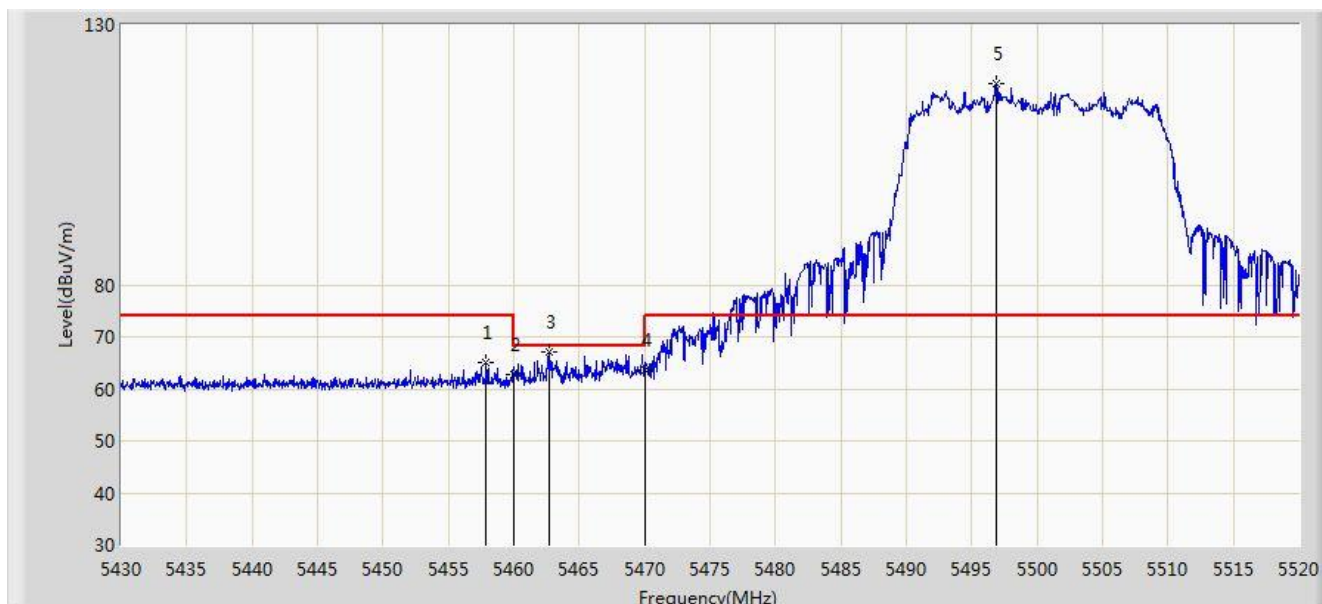


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5457.900	65.015	60.839	-8.985	74.000	4.176	PK
2			5460.000	62.743	58.563	-11.257	74.000	4.180	PK
3			5462.670	67.043	62.857	-1.157	68.200	4.186	PK
4			5470.000	63.565	59.363	-4.635	68.200	4.202	PK
5		*	5496.825	118.636	114.373	N/A	N/A	4.264	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/20 - 07:02
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11ax-HE20 at Channel 5500MHz	

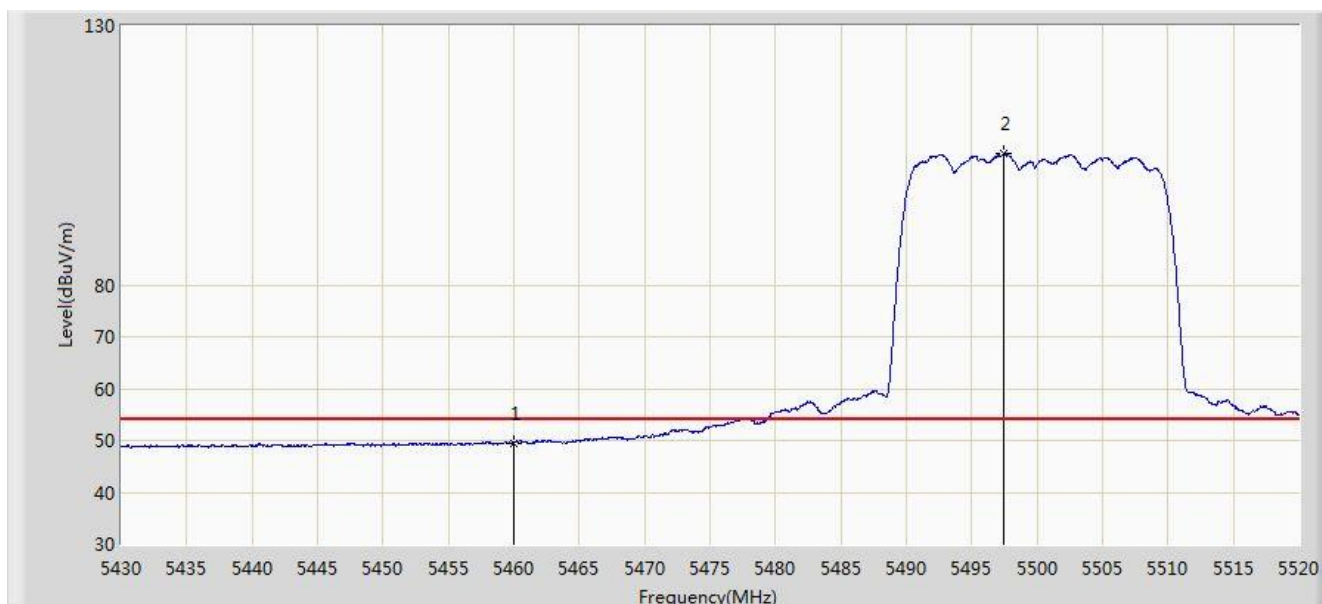

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	49.564	45.384	-4.436	54.000	4.180	AV
2		*	5497.455	105.398	101.133	N/A	N/A	4.264	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/20 - 07:22
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11ax-HE20 at Channel 5700MHz	




No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5696.862	116.137	111.275	N/A	N/A	4.861	PK
2			5725.000	69.548	64.519	-4.452	74.000	5.029	PK
3			5726.828	72.433	67.392	-1.567	74.000	5.040	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/20 - 07:21
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11ax-HE20 at Channel 5700MHz	

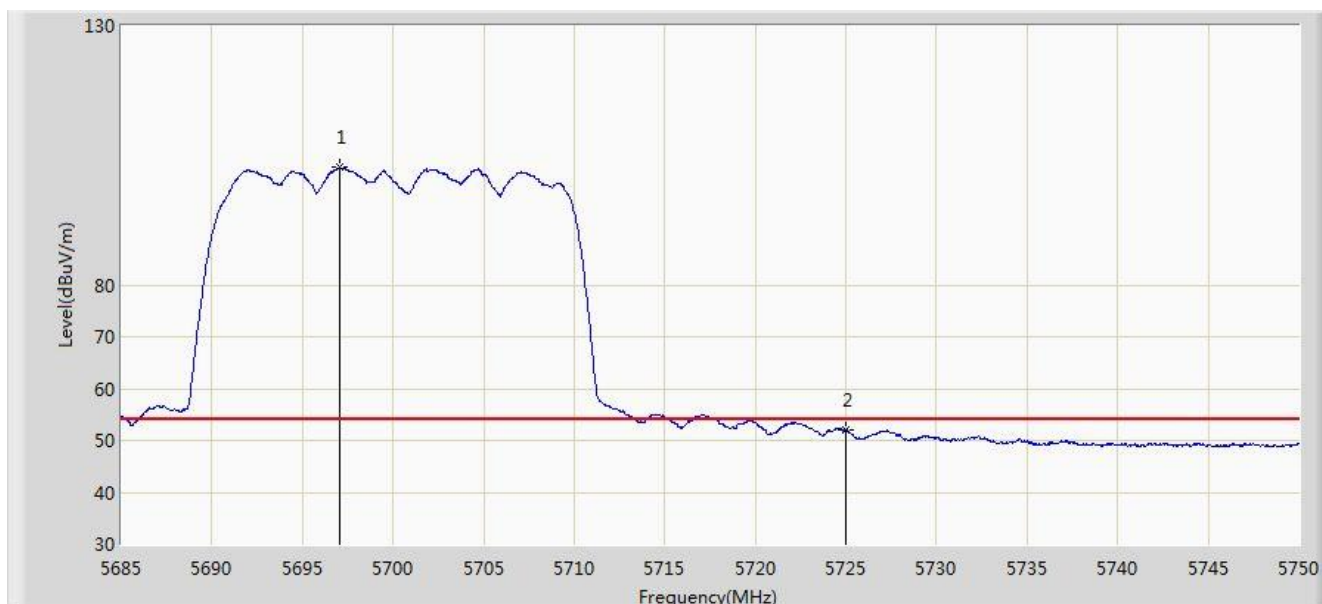


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5697.025	102.693	97.831	N/A	N/A	4.863	AV
2			5725.000	52.119	47.090	-1.881	54.000	5.029	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/20 - 07:16
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11ax-HE20 at Channel 5700MHz	

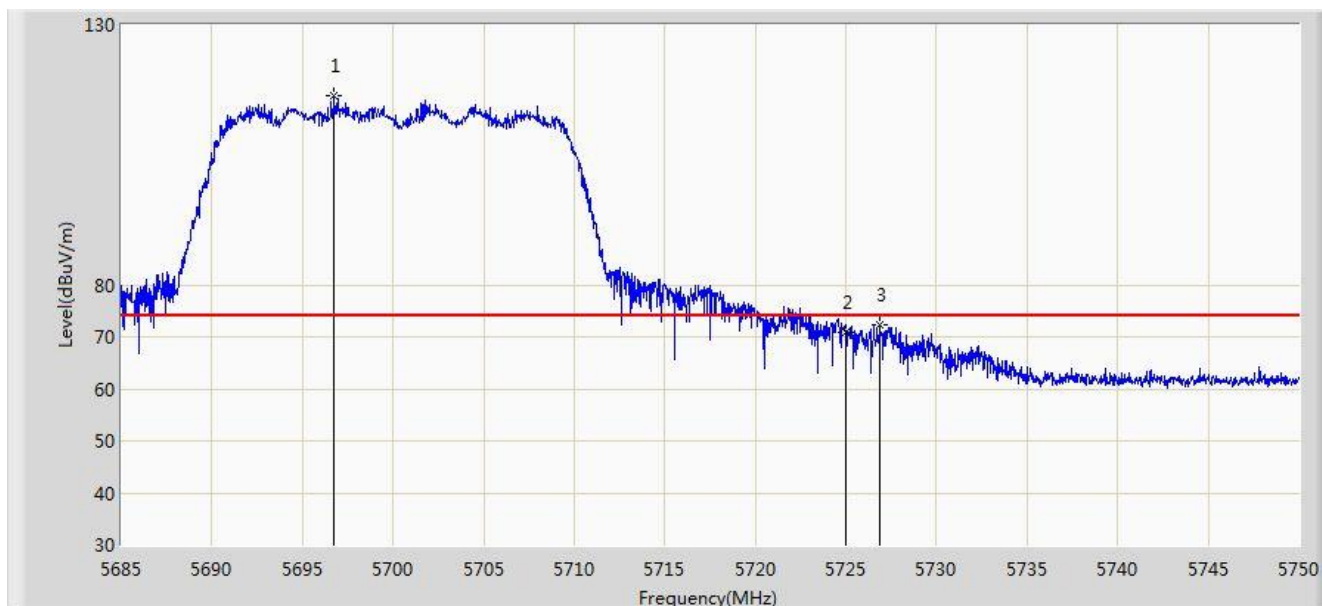


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5696.765	116.286	111.425	N/A	N/A	4.861	PK
2			5725.000	70.977	65.948	-3.023	74.000	5.029	PK
3			5726.860	72.241	67.200	-1.759	74.000	5.040	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/20 - 07:19
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11ax-HE20 at Channel 5700MHz	

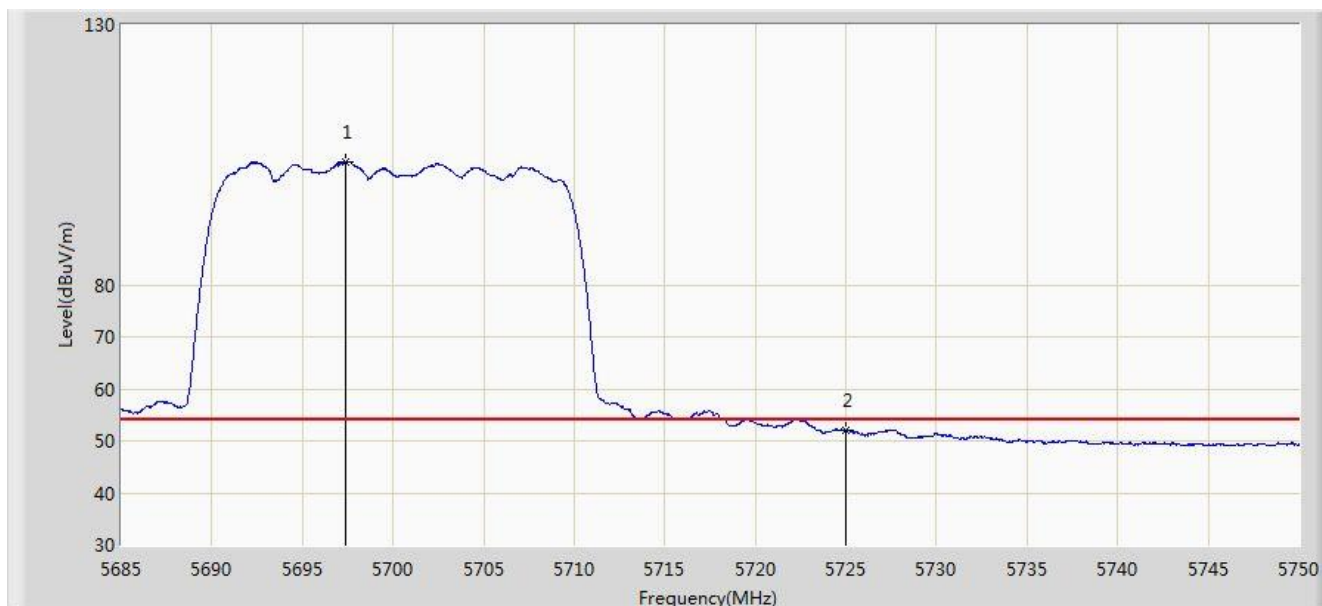


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5697.350	103.716	98.852	N/A	N/A	4.865	AV
2			5725.000	52.095	47.066	-1.905	54.000	5.029	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/20 - 07:24
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11ax-HE20 at Channel 5745MHz	

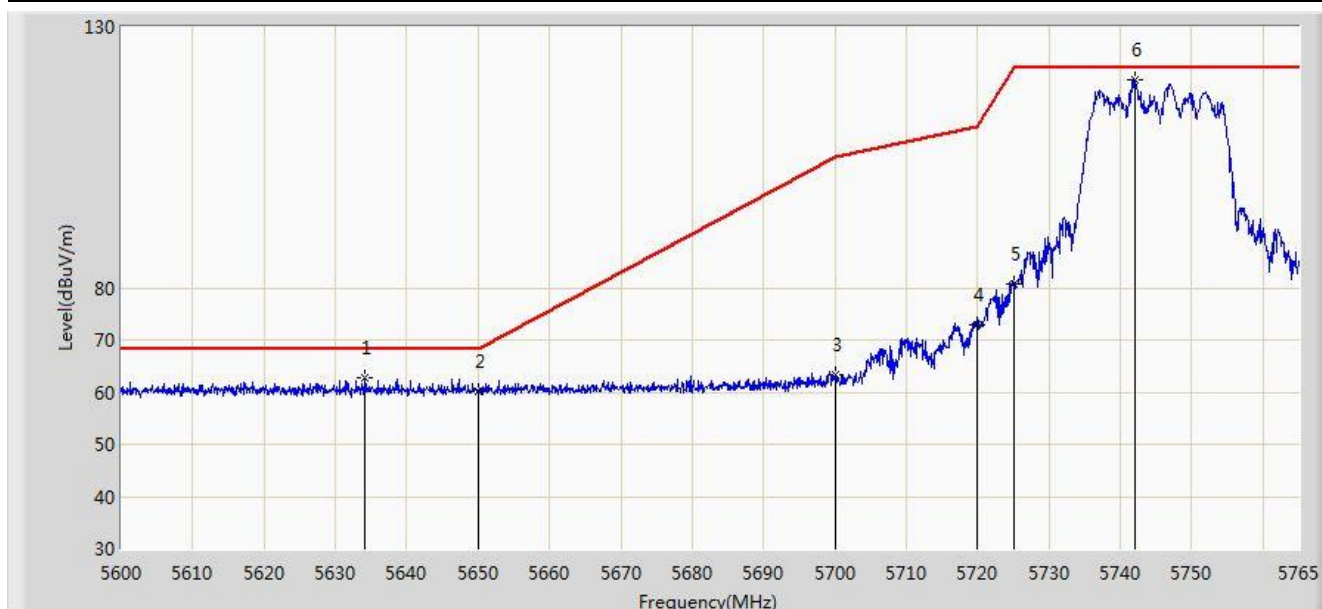


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5634.155	62.626	58.005	-5.574	68.200	4.621	PK
2			5650.000	60.032	55.361	-8.168	68.200	4.671	PK
3			5700.000	63.299	58.421	-41.901	105.200	4.878	PK
4			5720.000	73.003	68.006	-37.797	110.800	4.997	PK
5			5725.000	80.845	75.816	-41.355	122.200	5.029	PK
6		*	5742.065	119.725	114.587	N/A	N/A	5.137	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/20 - 07:26
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11ax-HE20 at Channel 5745MHz	

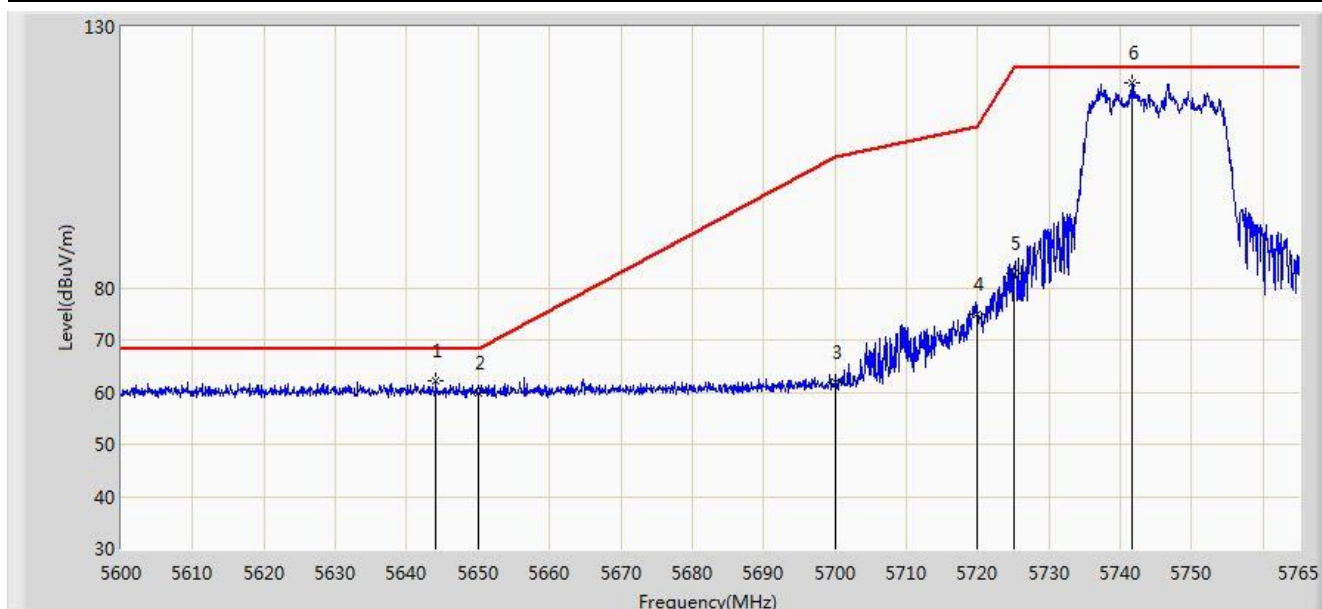


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5644.055	62.140	57.489	-6.060	68.200	4.651	PK
2			5650.000	59.793	55.122	-8.407	68.200	4.671	PK
3			5700.000	61.861	56.983	-43.339	105.200	4.878	PK
4			5720.000	74.833	69.836	-35.967	110.800	4.997	PK
5			5725.000	82.773	77.744	-39.427	122.200	5.029	PK
6		*	5741.570	119.175	114.040	N/A	N/A	5.135	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/20 - 07:29
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11ax-HE20 at Channel 5825MHz	

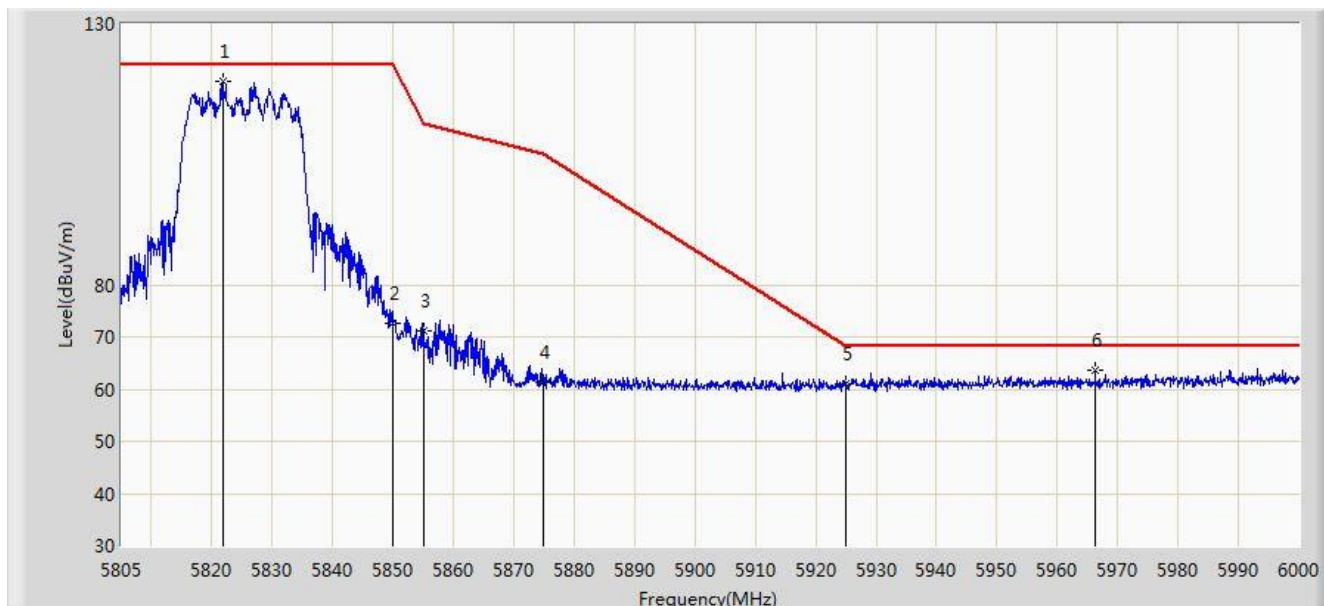


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5821.868	119.013	113.443	N/A	N/A	5.570	PK
2			5850.000	72.496	66.770	-49.704	122.200	5.726	PK
3			5855.000	71.032	65.286	-39.768	110.800	5.746	PK
4			5875.000	61.296	55.476	-43.904	105.200	5.820	PK
5			5925.000	61.093	55.127	-7.107	68.200	5.967	PK
6			5966.265	63.658	57.603	-4.542	68.200	6.055	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/20 - 07:28
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11ax-HE20 at Channel 5825MHz	

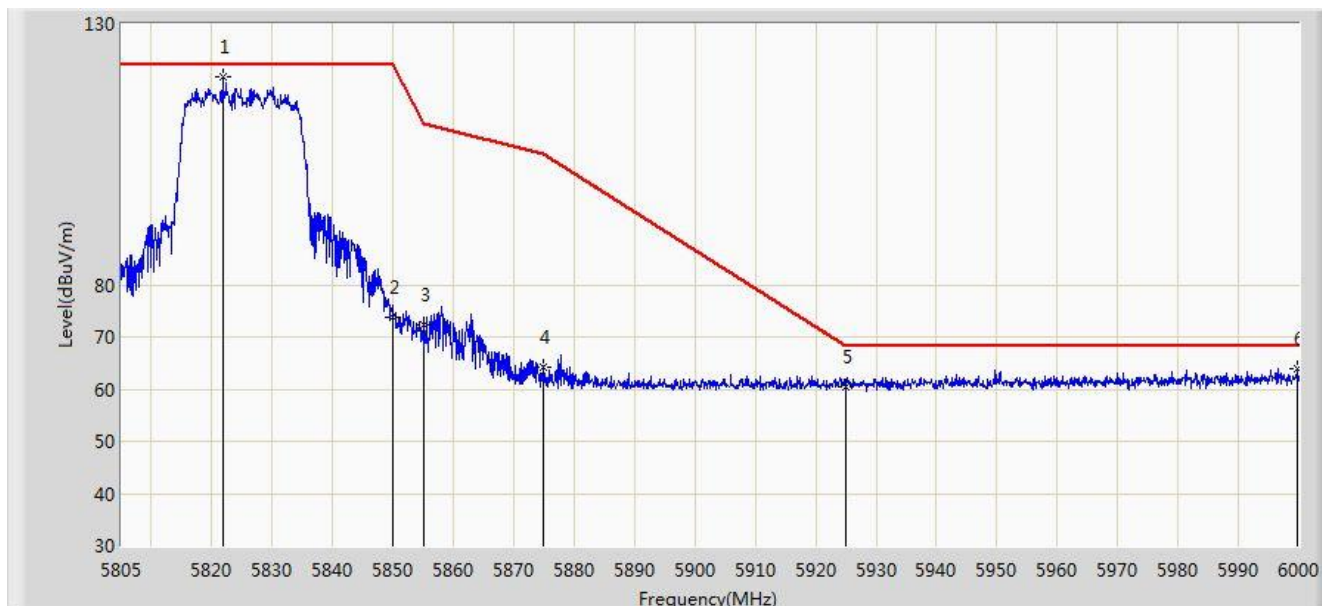


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5821.868	119.745	114.175	N/A	N/A	5.570	PK
2			5850.000	73.852	68.126	-48.348	122.200	5.726	PK
3			5855.000	72.431	66.685	-38.369	110.800	5.746	PK
4			5875.000	64.253	58.433	-40.947	105.200	5.820	PK
5			5925.000	60.527	54.561	-7.673	68.200	5.967	PK
6			5999.805	63.910	57.799	-4.290	68.200	6.112	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/20 - 07:37
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11ax-HE40 at Channel 5190MHz	

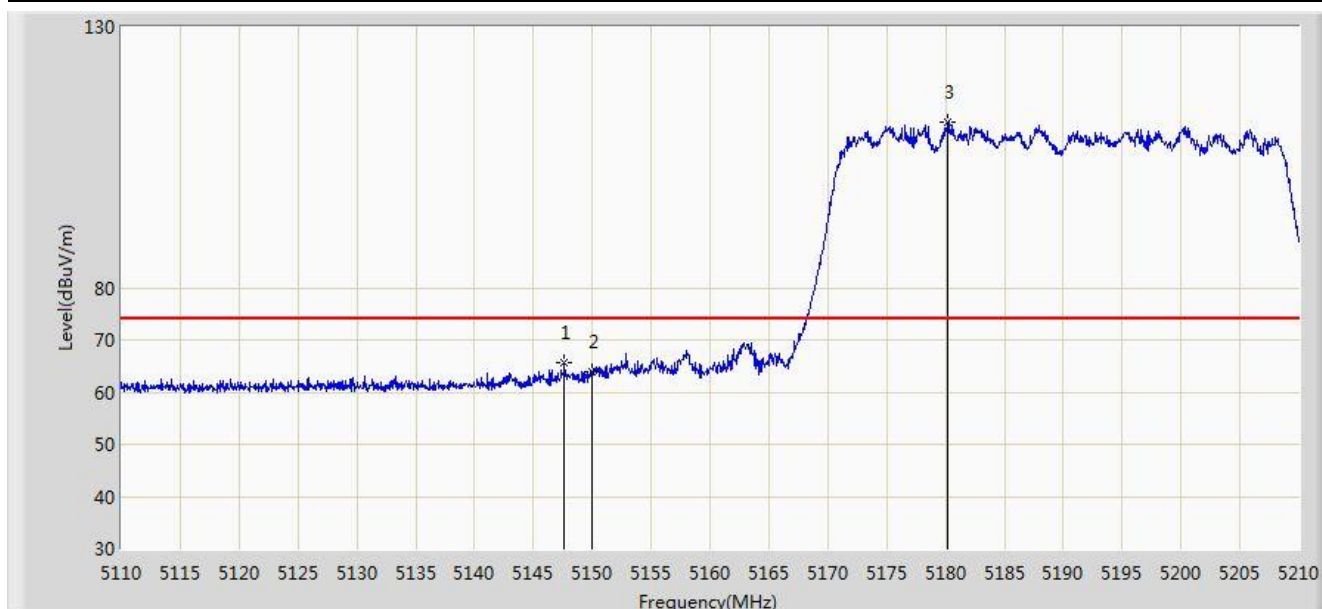


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5147.650	65.779	61.603	-8.221	74.000	4.176	PK
2			5150.000	63.929	59.760	-10.071	74.000	4.170	PK
3		*	5180.200	111.850	107.782	N/A	N/A	4.068	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/20 - 07:38
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11ax-HE40 at Channel 5190MHz	

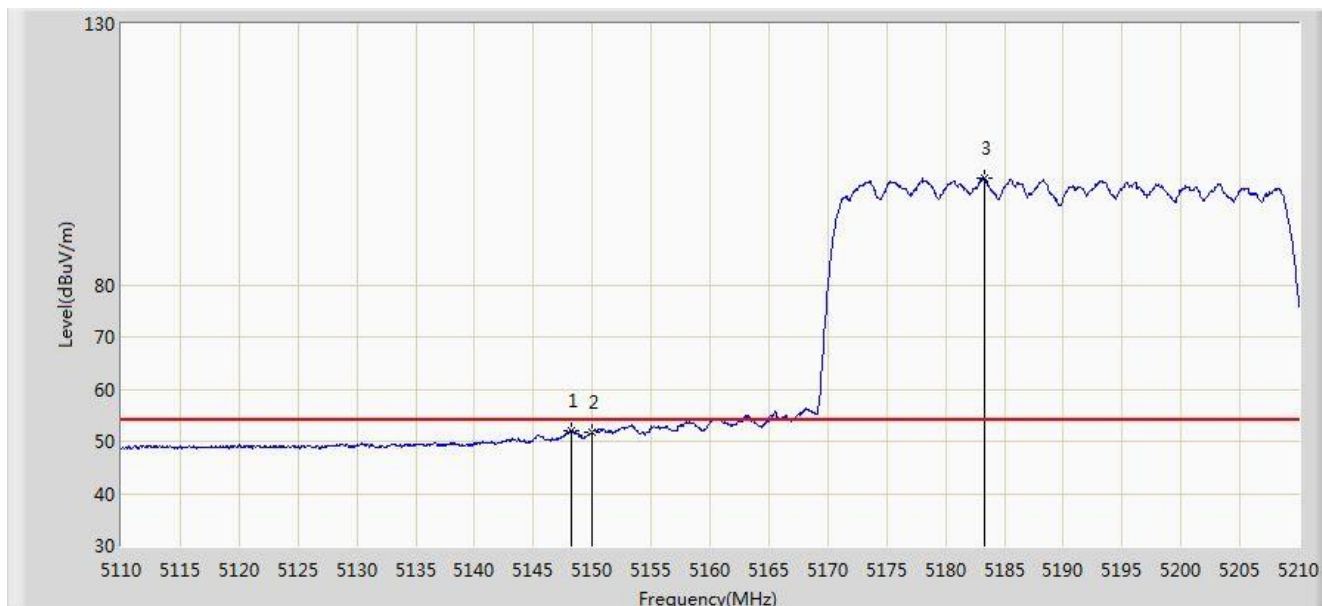

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5148.200	52.108	47.933	-1.892	54.000	4.174	AV
2			5150.000	51.700	47.531	-2.300	54.000	4.170	AV
3		*	5183.350	100.460	96.403	N/A	N/A	4.056	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)