



**BUREAU
VERITAS**

Test Report No.: RJ2511WDG0188-2



Certificate # 2951.01

TEST REPORT

Applicant	CORSAIR MEMORY, Inc.
Address	115 North McCarthy Blvd, Milpitas, CA 95035, USA

Manufacturer or Supplier	CORSAIR MEMORY, Inc.	
Address	115 North McCarthy Blvd, Milpitas, CA 95035, USA	
Product	Wave Go RX Unit	
Brand Name		
Model	22MAP9901	
Additional Model & Model Difference	N/A	
Date of tests	Dec. 15, 2025 ~ Dec. 31, 2025	

The tests have been carried out according to the requirements of the following standards:

☒ ARIB STD-T66, Article 2 Section 1 Item 19, MIC Notice No.88 Appendix No.43

CONCLUSION: The submitted sample was found to **COMPLY** with the test requirement

Prepared by Andrew Sha
Project Engineer / EMC Department

Approved by Glyn He
Assistant Manager / EMC Department



Date: Jun. 22, 2026

This report is governed by, and incorporates by reference, the Conditions of Testing as posted at the date of issuance of this report at <http://www.bureauveritas.com/home/about-us/our-business/cps/about-us/terms-conditions/> and is intended for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. Measurement uncertainty is only provided upon request for accredited tests. Statements of conformity are based on simple acceptance criteria without taking measurement uncertainty into account, unless otherwise requested in writing. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence or if you require measurement uncertainty; provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents.

Bureau Veritas Shenzhen Co., Ltd.
Dongguan Branch

No. 96, Guantai Road (Houjie Section), Houjie
Town, Dongguan City, Guangdong Province.
523942. People's Republic of China.

Tel.: +86 769 8998 2098
Fax: +86 769 8593 1080
Email: customerservice.dg@bureauveritas.com



TABLE OF CONTENTS

RELEASE CONTROL RECORD	4
1 SUMMARY OF TEST RESULTS	5
1.1 MEASUREMENT UNCERTAINTY	6
2 GENERAL INFORMATION.....	7
2.1 GENERAL DESCRIPTION OF EUT	7
2.2 DESCRIPTION OF TEST CHANNELS	8
2.3 TEST CONDITIONS	9
2.4 ASSEMBLY	9
2.5 ANTENNA SPECIFICATIONS	9
2.5.1 ANTENNA GAIN	9
2.5.2 ANTENNA PATTERN.....	9
3 TEST RESULTS.....	10
3.1 FREQUENCY TOLERANCE MEASUREMENT	10
3.1.1 LIMITS OF FREQUENCY TOLERANCE MEASUREMENT	10
3.1.2 TEST METHOD	10
3.1.3 TEST SETUP	10
3.1.4 TEST RESULTS	11
3.2 OCCUPIED BANDWIDTH MEASUREMENT (99% POWER BANDWIDTH).....	12
3.2.1 LIMITS OF OCCUPIED BANDWIDTH MEASUREMENT	12
3.2.2 TEST METHOD	12
3.2.3 TEST SETUP	12
3.2.4 TEST RESULTS	12
3.3 SPURIOUS EMISSIONS FOR TRANSMITTER MEASUREMENT	16
3.3.1 LIMITS OF SPURIOUS EMISSIONS	16
3.3.2 TEST METHOD	16
3.3.3 TEST SETUP	16
3.3.4 SUMMARY OF TEST RESULT	17
3.4 ANTENNA POWER MEASUREMENT	28
3.4.1 LIMITS OF ANTENNA POWER.....	28
3.4.2 TEST METHOD	28
3.4.3 TEST SETUP	28
3.4.4 TEST RESULTS	29
3.5 SPURIOUS EMISSIONS FOR RECEIVER.....	30
3.5.1 LIMITS OF SPURIOUS EMISSIONS FOR RECEIVER	30
3.5.2 TEST METHOD	30
3.5.3 TEST SETUP	30
3.5.4 SUMMARY OF TEST RESULT	31
3.6 INTERFERENCE PREVENTION FUNCTION	35
3.6.1 LIMITS OF INTERFERENCE PREVENTION FUNCTION	35
3.6.2 TEST METHOD	35
3.6.3 TEST SETUP	35
3.6.4 TEST RESULTS	35
4 TEST INSTRUMENTS	36
5 PHOTOGRAPHS OF THE TEST CONFIGURATION	37



BUREAU
VERITAS

Test Report No.: RJ2511WDG0188-2

6 APPENDIX A – MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT
BY THE LAB..... 38



BUREAU
VERITAS

Test Report No.: RJ2511WDG0188-2

RELEASE CONTROL RECORD

ISSUE NO.	REASON FOR CHANGE	DATE ISSUED
RJ2511WDG0188-2	Original release	Jun. 22, 2026



1 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications (For BT-LE):

Article 2 Section 1 Item 19 Reference	ARIB STD-T66 Ref.	Report reference	Parameter	Test Results (NOTE)
GENERAL PROVISIONS				
C	3.2 (4)	3.1	Frequency tolerance	C
D	3.2 (7)	3.2	Occupied bandwidth	C
E	3.2 (6)	3.3	Spurious emissions	C
TRANSMITTING EQUIPMENT				
F	3.2(1)	3.4	Antenna power	C
--	--	--	SAR	NA
TRANSMITTING ANTENNA				
--	--	2.5	Type, configuration, etc. of transmitting antenna	C
--	--	2.5	Direction pattern of transmitting antenna	C
RECEIVING EQUIPMENT				
G	3.3 (1)	3.5	Spurious emissions of receiver	C
--	--	2.5	Refer to all articles for transmitting antenna	C
OPERATING FREQUENCY 2400 TO 2483.5MHz				
--	3.7 (1)	3.3	High Frequency/modulation section cannot be opened easily	C
--	3.1 (1)	2.1	Communication method	C
--	3.2 (1)a	2.1	Modulation method	C
--	3.2 (1)a	2.1	Spread spectrum method	C
--	3.2 (2)	3.4	Antenna power	C
--	3.6 (2)	3.4	Absolute gain of transmitting antenna	C
--	3.6 (2)	3.4	Angular width of principal radiation (AWPR)	C
--	3.2 (10)	-	Number of carriers within 1 MHz bandwidth in OFDM	N/A
--	3.2 (8)	-	Diffusion bandwidth	N/A
--	3.2 (9)	-	Spreading factor	N/A
--	3.4.1(1)	3.6	Interference Prevention Function	C
--	3.4.1(3)	-	Carrier Sense Capability	N/A
NOTE: C = Conform NC = Not Conform NT = Not Tested NA = Not Applicable				



1.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT:

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

ITEM	UNCERTAINTY
Occupied Bandwidth	206.50 Hz
Spurious emissions	$\pm 3.93\text{dB}$
Output power density	1.37dB
Out of band radiated power	2.52dB
Frequency Tolerance	0.104 ppm



2 GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF EUT

PRODUCT	Wave Go RX Unit
MODEL NO.	22MAP9901
ADDITIONAL MODELS	N/A
NOMINAL VOLTAGE	Input: 5VDC, 2A; USB-C male output: 5VDC, 1.5A
TYPE OF EQUIPMENT	Data transmission equipment operating in the 2.4GHz
MODULATION TYPE	BT-LE GFSK (1Mbps)
MODULATION TECHNOLOGY	DTS
OPERATING FREQUENCY	2402MHz ~ 2480MHz for BT-LE GFSK (1Mbps)
NUMBER OF CHANNEL	40 for BT-LE GFSK (1Mbps)
RATED RF OUTPUT POWER	BT-LE 1Mbps: 3 mW
CONDUCTED RF OUTPUT POWER	BT-LE 1Mbps: 2.173mW
EIRP OUTPUT POWER	BT-LE 1Mbps: 0.991mW
HW-RELEASE NO	V1.2
SW-RELEASE NO	V1.2
ANTENNA TYPE	PCB Antenna, -3.41dBi Gain
CABLE SUPPLIED	N/A

NOTES:

1. For the test results, the EUT had been tested with all conditions.
2. The above EUT information was declared by manufacturer and for more detailed features description please refers to the manufacturer's specifications or user's manual.
3. Please refer to the EUT photo document (Reference No.: 2511WDG0188-2) for detailed product photo.



2.2 DESCRIPTION OF TEST CHANNELS

40 channels are provided for BLE GFSK (1Mbps):

CHANNEL	FREQ. (MHZ)	CHANNEL	FREQ. (MHZ)	CHANNEL	FREQ. (MHZ)	CHANNEL	FREQ. (MHZ)
0	2402	10	2422	20	2442	30	2462
1	2404	11	2424	21	2444	31	2464
2	2406	12	2426	22	2446	32	2466
3	2408	13	2428	23	2448	33	2468
4	2410	14	2430	24	2450	34	2470
5	2412	15	2432	25	2452	35	2472
6	2414	16	2434	26	2454	36	2474
7	2416	17	2436	27	2456	37	2476
8	2418	18	2438	28	2458	38	2478
9	2420	19	2440	29	2460	39	2480

NOTES:

1. The channels which were indicated in bold type of the above channel list were selected as representative test channel. Therefore, only the data of the test channels were recorded in this report.
2. By means of test software for BT LE provided by manufacturers, the power levels during the tests were set according to the following codes:

BT-LE (GFSK) 1Mbps	
CHANNEL	POWER SETTING
0	2
19	2
39	2



2.3 TEST CONDITIONS

Test conditions	Voltage (Vdc)
V_{normal}	5.0
V_{max}	4.25
V_{min}	5.75

2.4 ASSEMBLY

The RF circuit and components are inside the shield, also it won't be easy to open. Frequency Band, channels and Modulation parameters are fixed inside the module. They cannot be edited or modified by end-user.

2.5 ANTENNA SPECIFICATIONS

2.5.1 ANTENNA GAIN

Ant. Type	Connector Type	Highest Peak Gain (dBi) 2.4GHz ~ 2.5GHz
PCB	N/A	-3.41

2.5.2 ANTENNA PATTERN

Please refer to the attached file (Antenna report).



BUREAU
VERITAS

Test Report No.: RJ2511WDG0188-2

3 TEST RESULTS

3.1 FREQUENCY TOLERANCE MEASUREMENT


3.1.1 LIMITS OF FREQUENCY TOLERANCE MEASUREMENT

Tolerance of frequency shall be +/- 50ppm.

3.1.2 TEST METHOD

According to MIC Notice No. 88 Appendix 43.

3.1.3 TEST SETUP

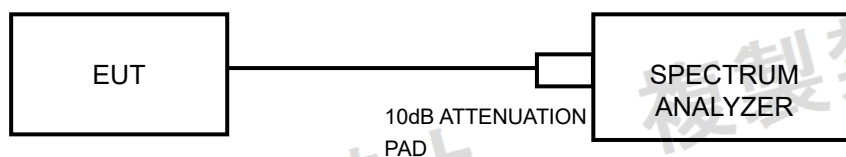



BUREAU
VERITAS

Test Report No.: RJ2511WDG0188-2

3.1.4 TEST RESULTS

BT-LE (GFSK 1 Mbps)

ENVIRONMENTAL CONDITIONS		25 deg.C, 56% RH					
Channel	Frequency (MHz)	Voltage normal		Voltage +10%		Voltage -10%	
		Carrier frequency (MHz)	Frequency tolerance (ppm)	Carrier frequency (MHz)	Frequency tolerance (ppm)	Carrier frequency (MHz)	Frequency tolerance (ppm)
0	2402	2401.984560	-6.427	2401.984160	-6.594	2401.983879	-6.711
19	2440	2439.982840	-7.032	2439.982679	-7.098	2439.982520	-7.163
39	2480	2479.981919	-7.290	2479.981800	-7.338	2479.981679	-7.387



3.2 OCCUPIED BANDWIDTH MEASUREMENT (99% POWER BANDWIDTH)


3.2.1 LIMITS OF OCCUPIED BANDWIDTH MEASUREMENT

ITEM	LIMIT	REMARK
Occupied bandwidth	<26MHz	For 802.11b, g & 802.11n (HT20)
Occupied bandwidth	<26MHz	For BT-LE (GFSK)

3.2.2 TEST METHOD

According to MIC Notice No. 88 Appendix 43.

3.2.3 TEST SETUP

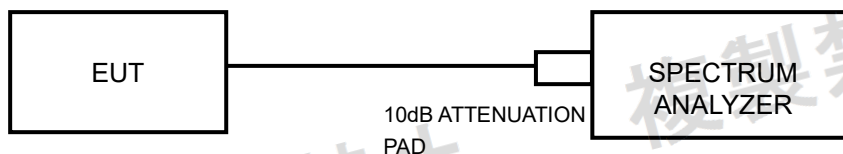

3.2.4 TEST RESULTS

BT-LE (GFSK 1 Mbps)

ENVIRONMENTAL CONDITIONS		25 deg.C, 56% RH		
CHANNEL	FREQUENCY (MHz)	V _{normal}	V _{+10%}	V _{-10%}
		OCCUPIED BANDWIDTH (MHz)	OCCUPIED BANDWIDTH (MHz)	OCCUPIED BANDWIDTH (MHz)
0	2402	1.21	1.23	1.23
19	2440	1.23	1.26	1.23
39	2480	1.23	1.23	1.23
Measurement uncertainty		± 206.50 Hz		


NOTE: For the test plots please refer to the below pages.




BUREAU
VERITAS

Test Report No.: RJ2511WDG0188-2

Vnormal

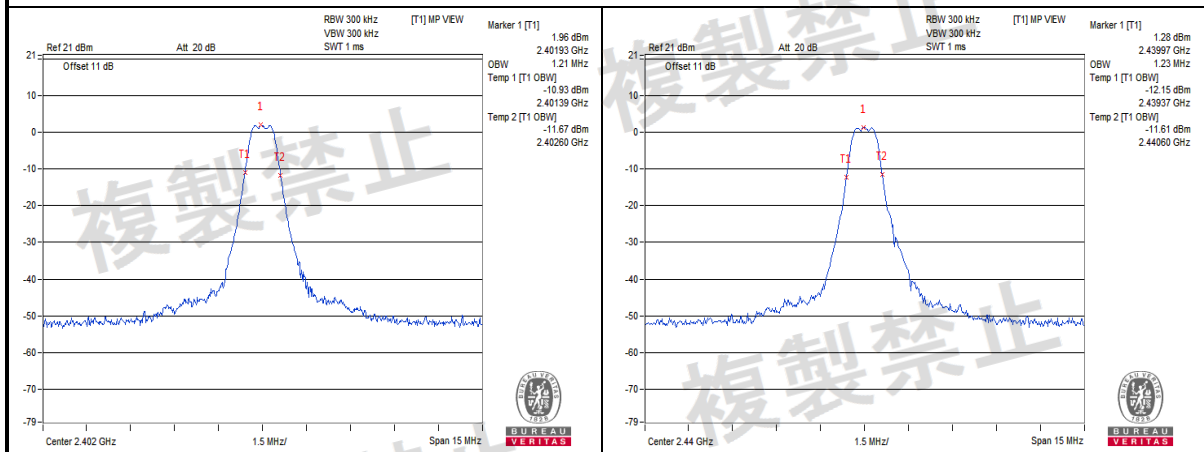

Channel 0

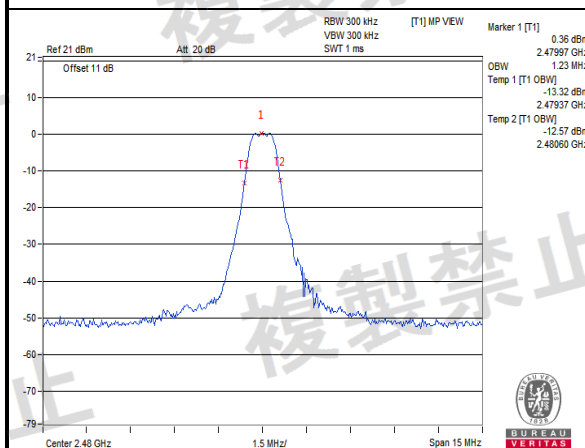

Channel 19

Channel 39


Measurement uncertainty: ± 206.50 Hz




BUREAU
VERITAS

Test Report No.: RJ2511WDG0188-2

V+10%

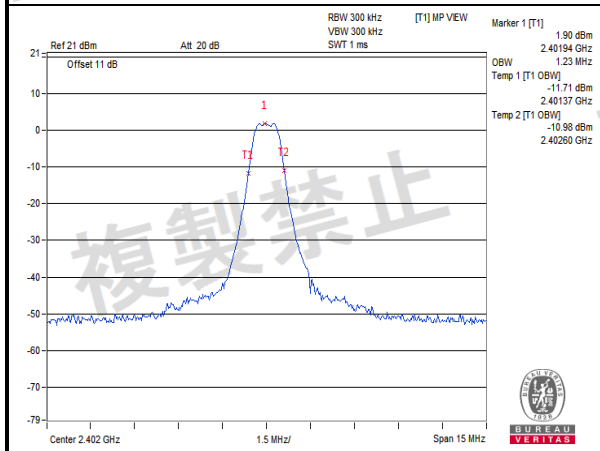


Channel 0

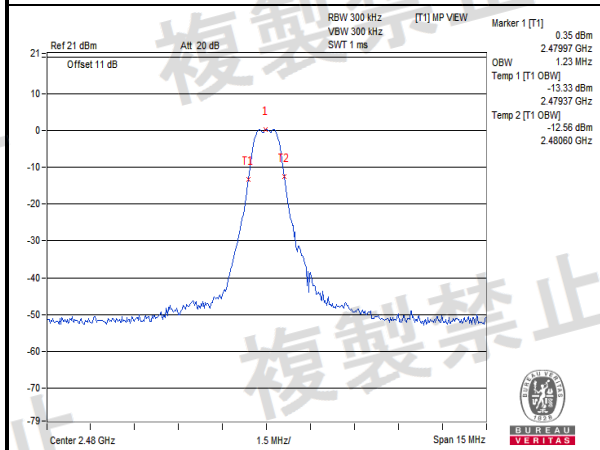

Channel 39

Measurement uncertainty: ± 206.50 Hz

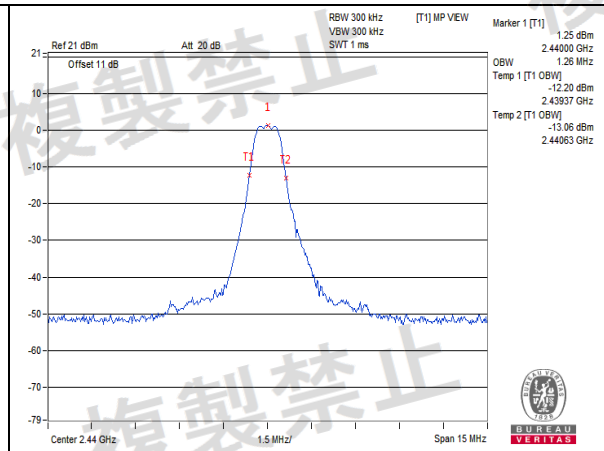


Channel 19




BUREAU
VERITAS

Test Report No.: RJ2511WDG0188-2

V-10%

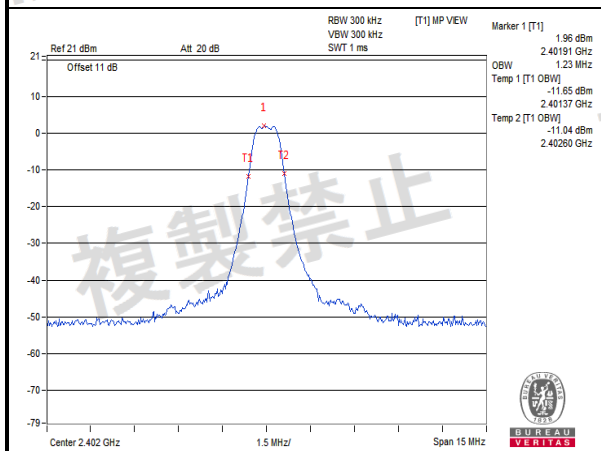

Channel 0

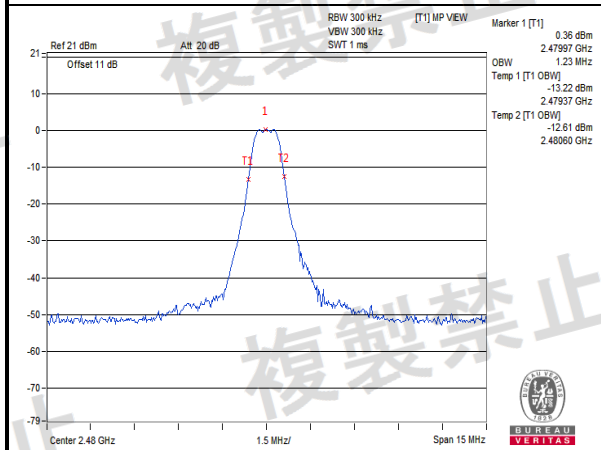

Channel 19

Channel 39

Measurement uncertainty: ± 206.50 Hz



3.3 SPURIOUS EMISSIONS FOR TRANSMITTER MEASUREMENT

3.3.1 LIMITS OF SPURIOUS EMISSIONS

FREQUENCIES (MHz)	LIMIT
Operating frequency 2400 to 2483.5MHz	
30.0MHz to 1000.0MHz	$\leq 2.5\mu\text{W/MHz}$
1000.0MHz to 2387MHz	$\leq 2.5\mu\text{W/MHz}$
2387.0MHz to 2400.0MHz	$\leq 25\mu\text{W/MHz}$
2483.5MHz to 2496.5MHz	$\leq 25\mu\text{W/MHz}$
2496.5MHz to 12500.0MHz	$\leq 2.5\mu\text{W/MHz}$

3.3.2 TEST METHOD

According to MIC Notice No. 88 Appendix 43.

3.3.3 TEST SETUP





3.3.4 SUMMARY OF TEST RESULT

BT-LE (GFSK 1 Mbps)

ENVIRONMENTAL CONDITIONS		25 deg.C, 56% RH					
TEST CHANNEL		CH0 (2402MHz)		CH19 (2440MHz)		LIMIT (uW/MHz)	RESULT
TEST CONDITION	FREQUENCY RANGE	FREQUENCY (MHz)	MEASURE. VALUE (uW/MHz)	FREQUENCY (MHz)	MEASURE. VALUE (uW/MHz)		
V _{normal}	30.0MHz to 1000.0MHz	819.820	0.270356	919.000	0.266459	2.5	PASS
	1000.0MHz to 2387MHz	2221.600	0.036869	1755.220	0.037502	2.5	PASS
	2387.0MHz to 2400.0MHz	2400.000	0.666508	2393.080	0.039971	25	PASS
	2483.5MHz to 2496.5MHz	2488.670	0.042205	2490.770	0.040258	25	PASS
	2496.5MHz to 12500.0MHz	12500.000	0.114913	6803.000	0.097927	2.5	PASS
V _{+10%}	30.0MHz to 1000.0MHz	931.130	0.264519	199.990	0.255313	2.5	PASS
	1000.0MHz to 2387MHz	2248.990	0.040809	2224.370	0.034784	2.5	PASS
	2387.0MHz to 2400.0MHz	2399.990	0.678084	2387.520	0.037429	25	PASS
	2483.5MHz to 2496.5MHz	2491.070	0.040487	2487.560	0.044806	25	PASS
	2496.5MHz to 12500.0MHz	6963.060	0.084127	6968.060	0.106308	2.5	PASS
V _{-10%}	30.0MHz to 1000.0MHz	789.990	0.280596	998.780	0.242893	2.5	PASS
	1000.0MHz to 2387MHz	2050.300	0.037387	2301.690	0.033554	2.5	PASS
	2387.0MHz to 2400.0MHz	2399.990	0.688901	2390.520	0.037748	25	PASS
	2483.5MHz to 2496.5MHz	2488.720	0.041196	2490.980	0.039982	25	PASS
	2496.5MHz to 12500.0MHz	6915.540	0.094842	6785.500	0.099705	2.5	PASS

NOTE: 1. the worst value in each frequency range v.s. each channel has been marked by boldface.

BUREAU
VERITAS

Test Report No.: RJ2511WDG0188-2

ENVIRONMENTAL CONDITIONS		25 deg.C, 56% RH			
TEST CHANNEL		CH39 (2480MHz)		LIMIT (uW/MHz)	RESULT
TEST CONDITION	FREQUENCY RANGE	FREQUENCY (MHz)	MEASURE. VALUE (uW/MHz)		
V _{normal}	30.0MHz to 1000.0MHz	751.190	0.257591	2.5	PASS
	1000.0MHz to 2387MHz	2268.060	0.032957	2.5	PASS
	2387.0MHz to 2400.0MHz	2392.470	0.039571	25	PASS
	2483.5MHz to 2496.5MHz	2483.590	0.043629	25	PASS
	2496.5MHz to 12500.0MHz	6930.550	0.104444	2.5	PASS
V _{+10%}	30.0MHz to 1000.0MHz	888.930	0.26375	2.5	PASS
	1000.0MHz to 2387MHz	2235.470	0.034223	2.5	PASS
	2387.0MHz to 2400.0MHz	2393.890	0.037178	25	PASS
	2483.5MHz to 2496.5MHz	2484.170	0.054027	25	PASS
	2496.5MHz to 12500.0MHz	6167.780	0.090739	2.5	PASS
V _{-10%}	30.0MHz to 1000.0MHz	908.570	0.297877	2.5	PASS
	1000.0MHz to 2387MHz	1734.410	0.035304	2.5	PASS
	2387.0MHz to 2400.0MHz	2391.330	0.042847	25	PASS
	2483.5MHz to 2496.5MHz	2495.570	0.0441	25	PASS
	2496.5MHz to 12500.0MHz	5762.640	0.114857	2.5	PASS


- NOTES:** 1. The worst value in each frequency range v.s. each channel has been marked by boldface.
2. The spectrum plots are attached on the following pages.



BUREAU
VERITAS

Test Report No.: RJ2511WDG0188-2

Vnormal Channel 0

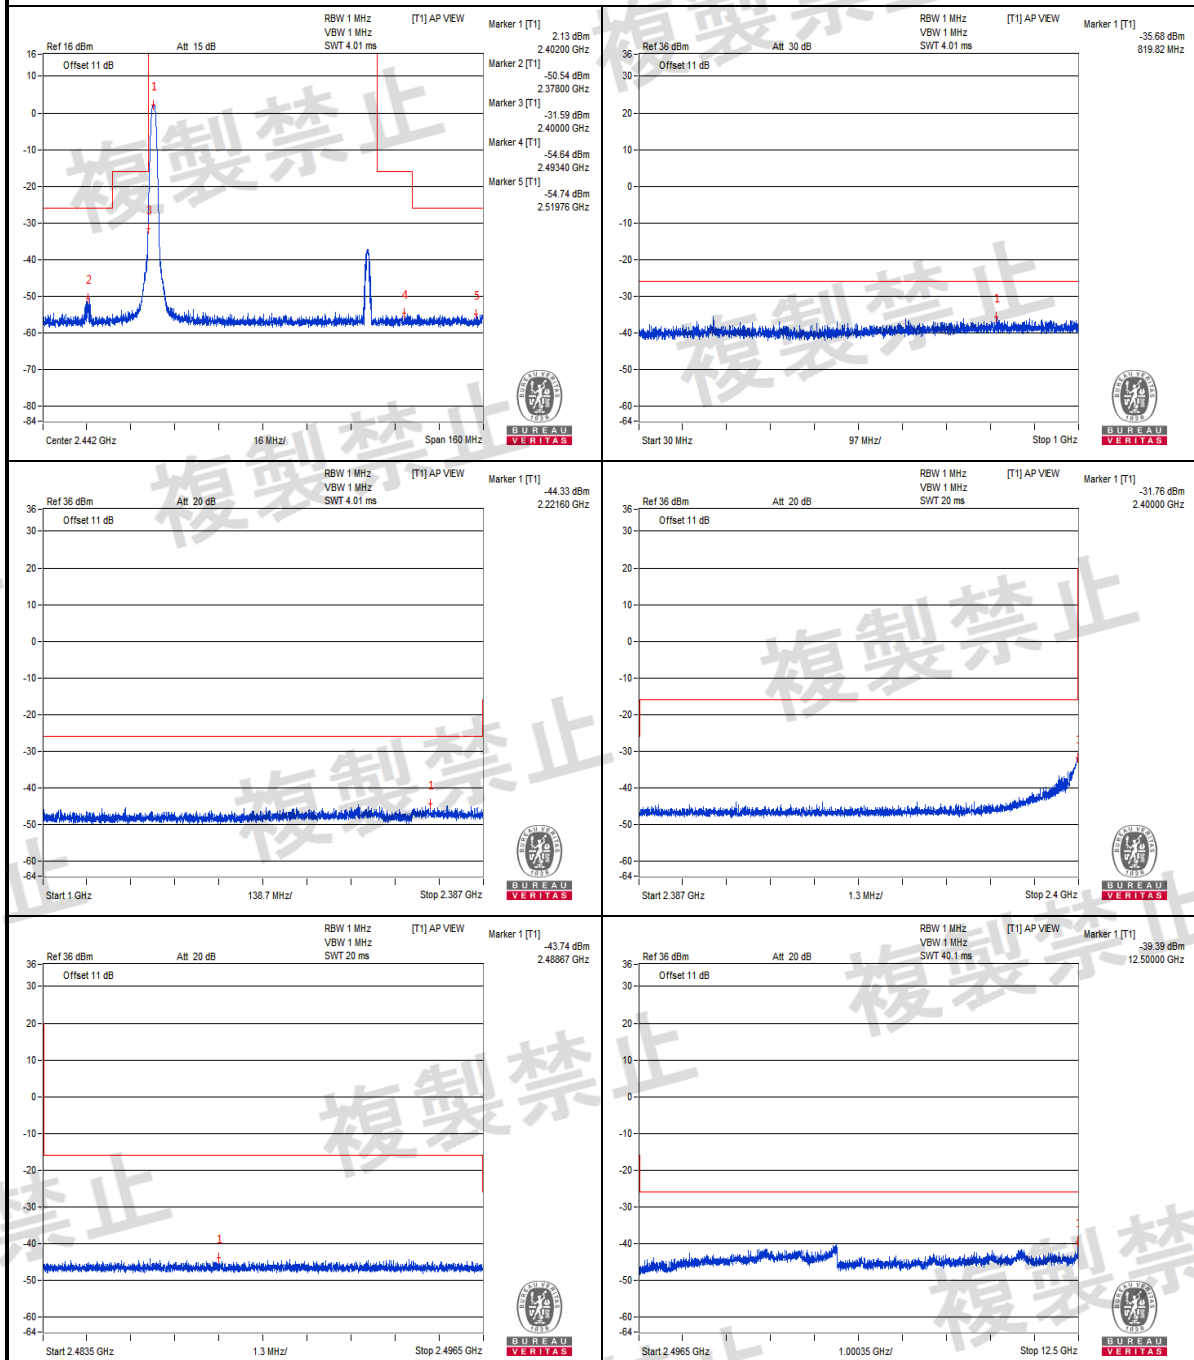


Measurement uncertainty: $\pm 3.93\text{dB}$



BUREAU
VERITAS

Test Report No.: RJ2511WDG0188-2

Vnormal
Channel 19

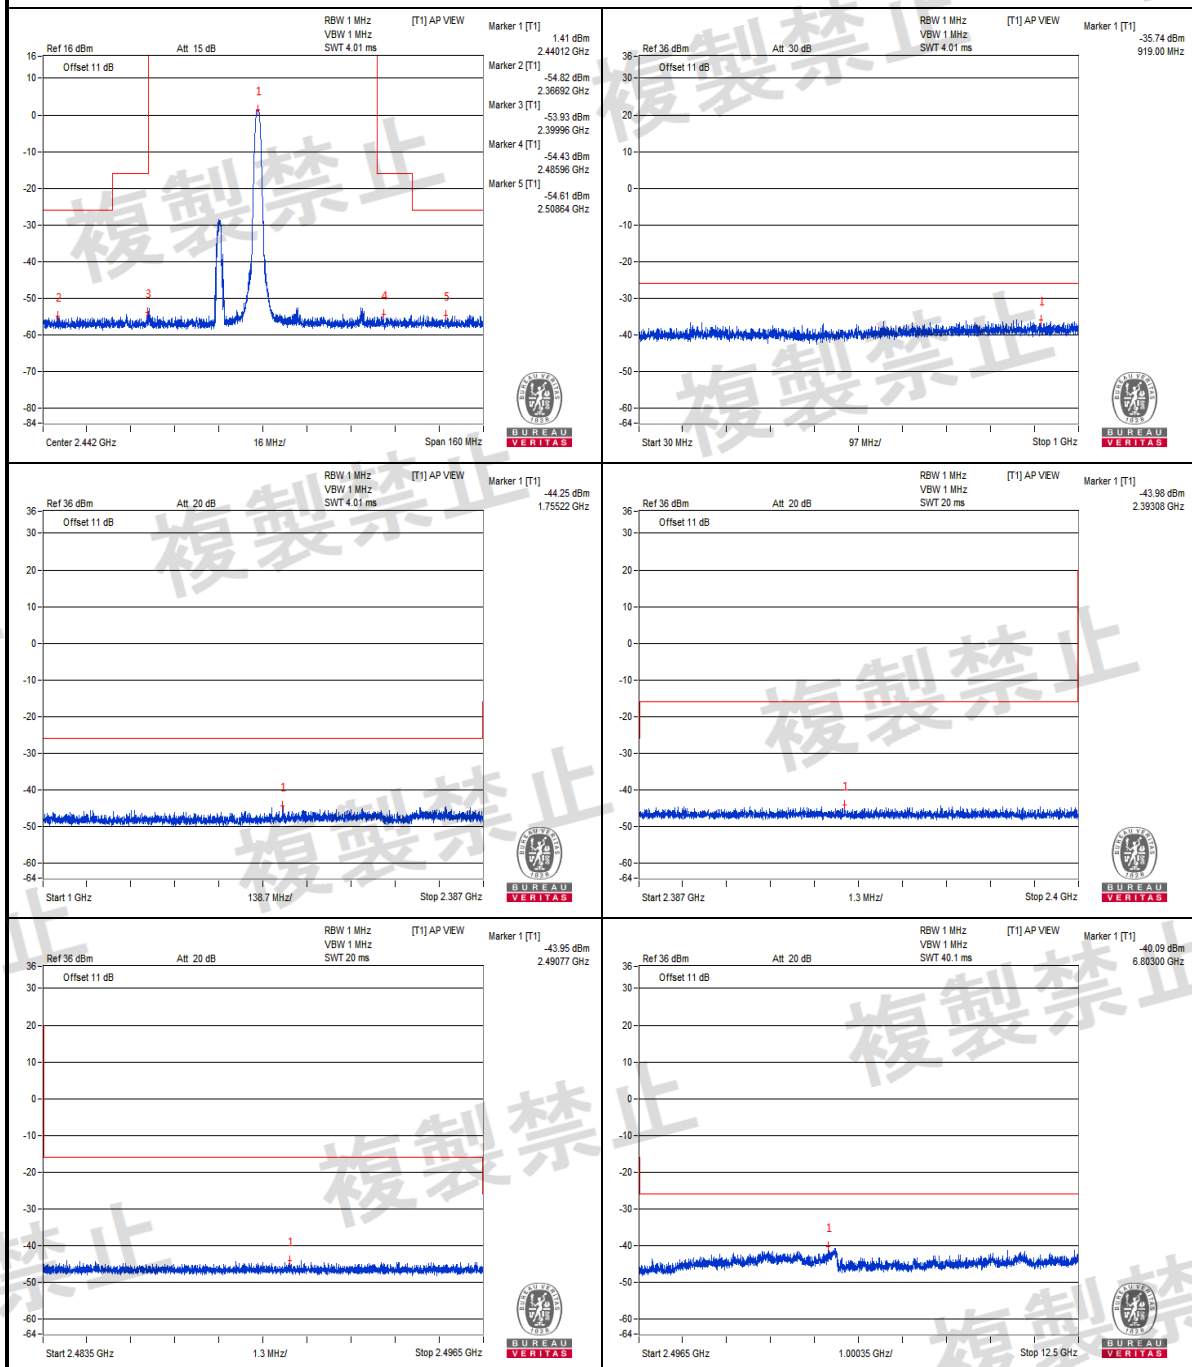


Measurement uncertainty: $\pm 3.93\text{dB}$



BUREAU
VERITAS

Test Report No.: RJ2511WDG0188-2

Vnormal
Channel 39

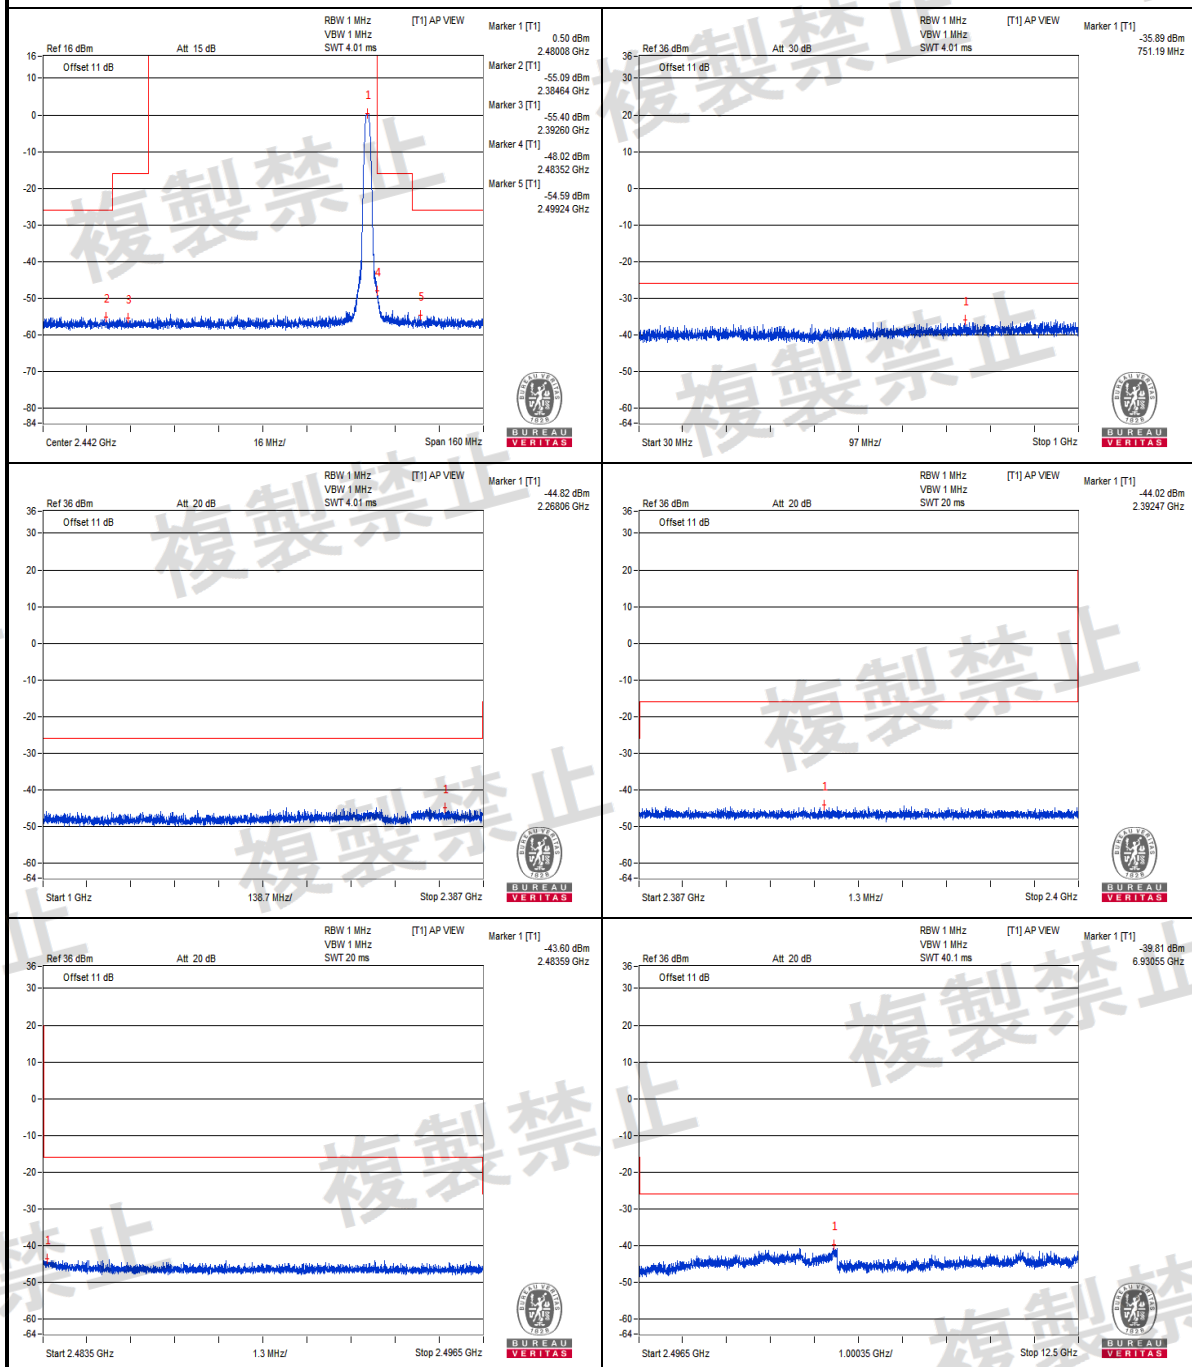

Measurement uncertainty: $\pm 3.93\text{dB}$




BUREAU
VERITAS

Test Report No.: RJ2511WDG0188-2

V+10%

Channel 0

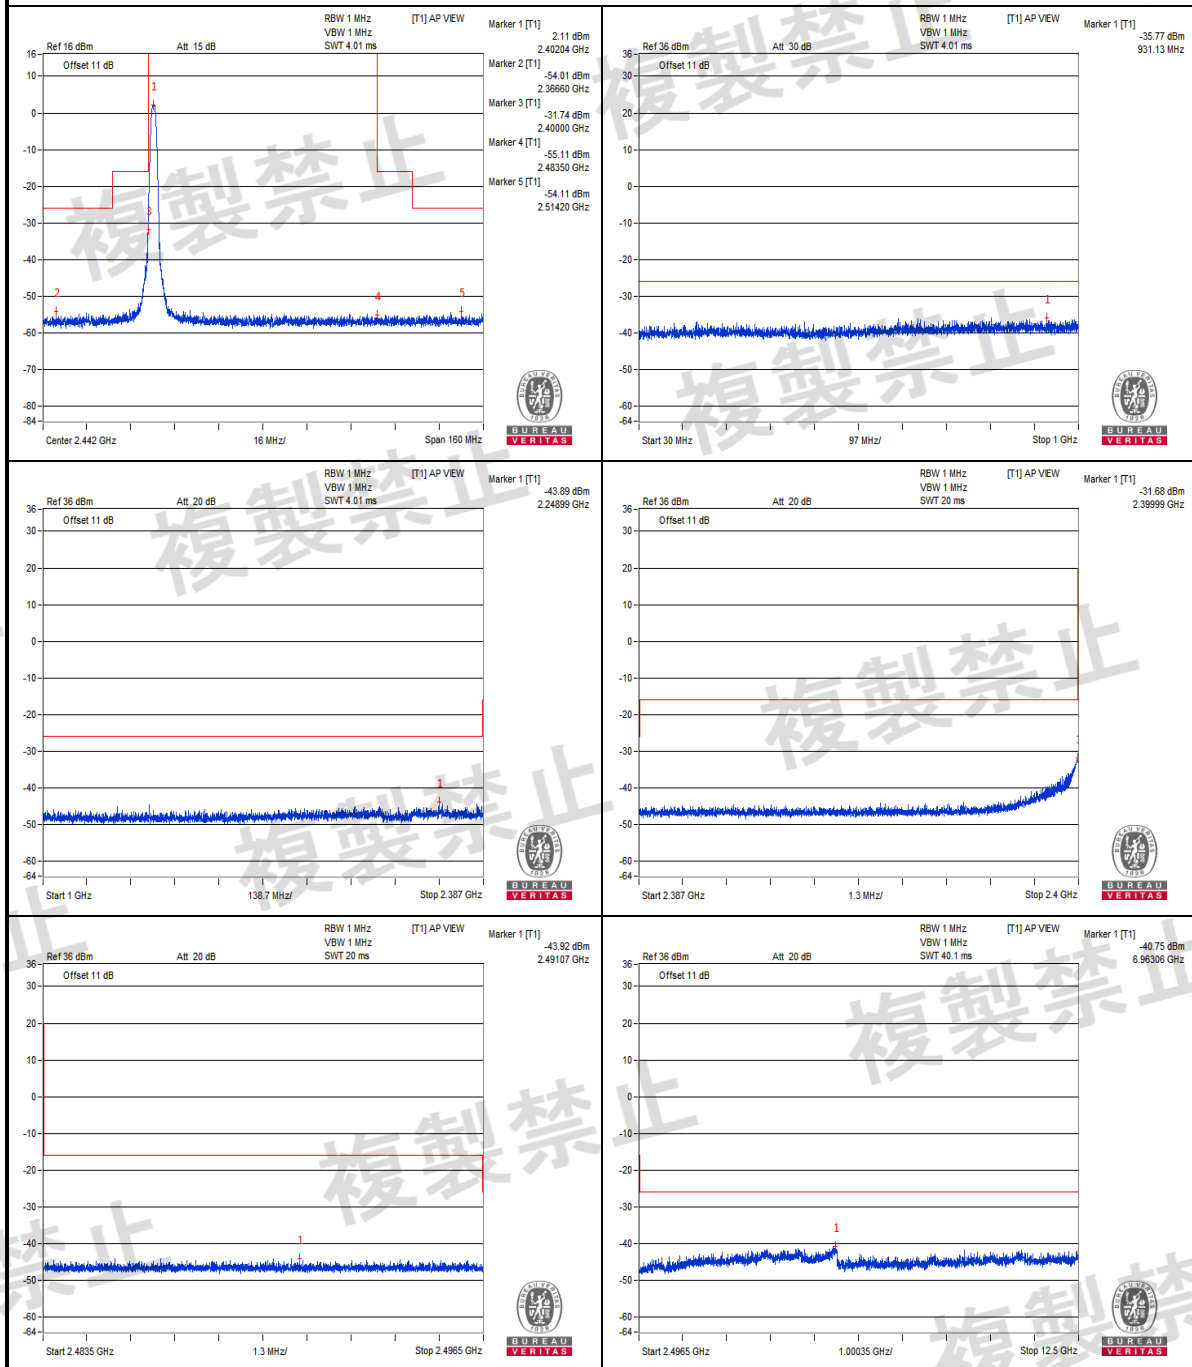


Measurement uncertainty: $\pm 3.93\text{dB}$



BUREAU
VERITAS

Test Report No.: RJ2511WDG0188-2

V+10%
Channel 19

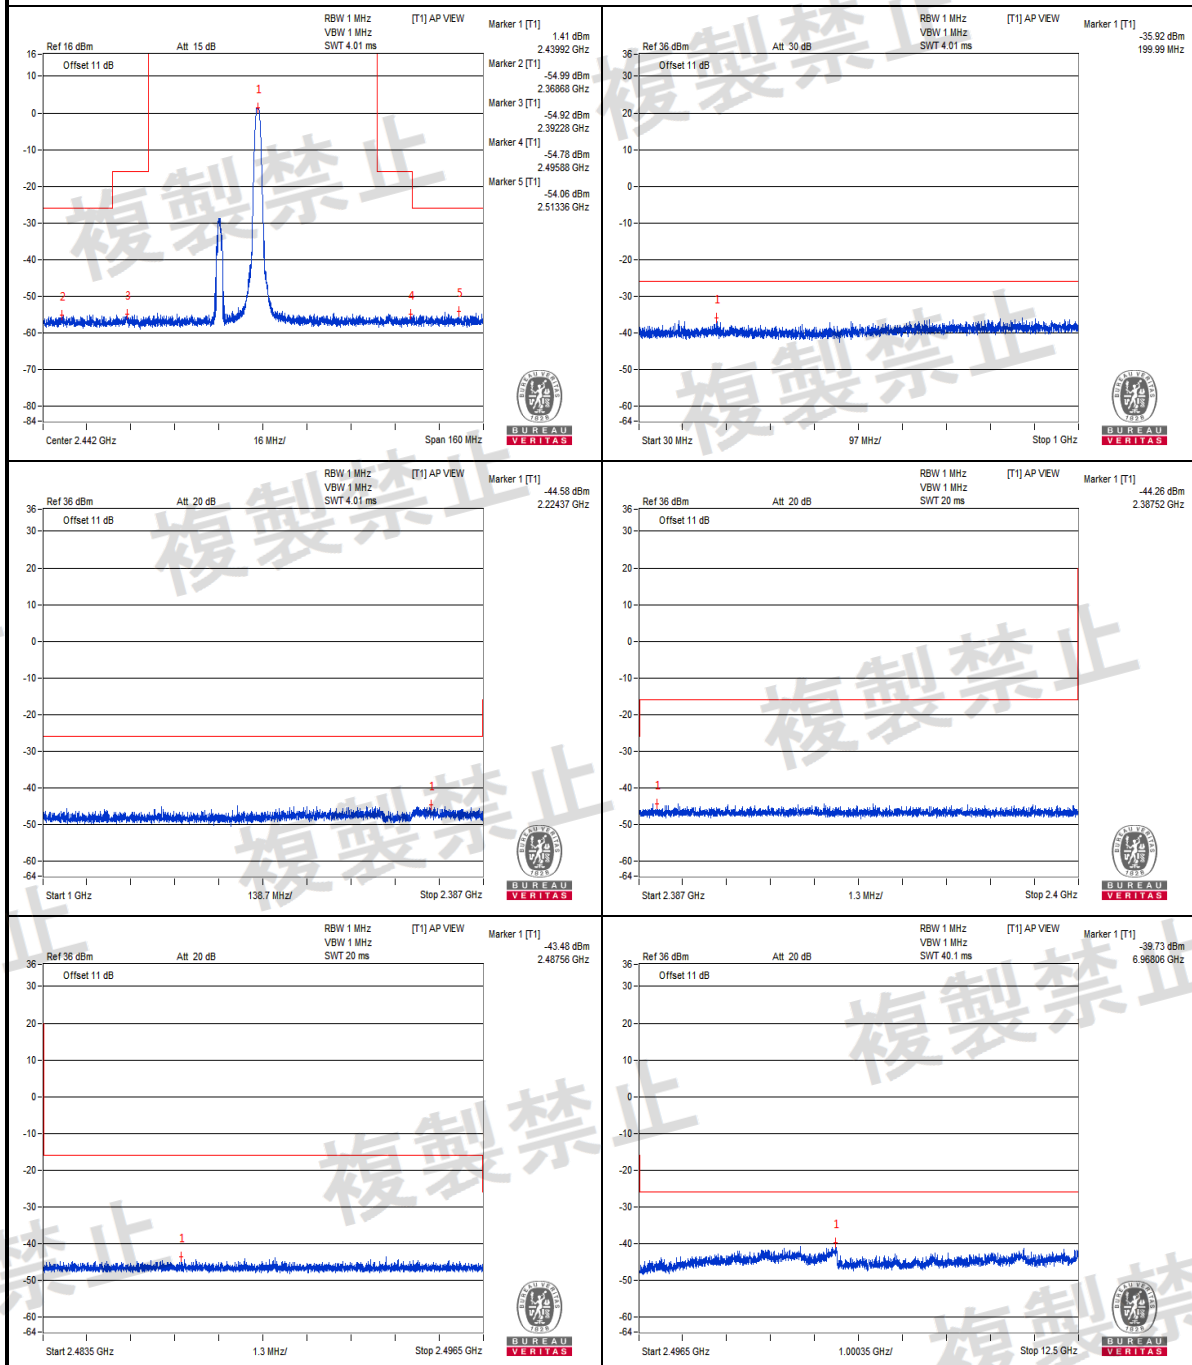


Measurement uncertainty: $\pm 3.93\text{dB}$



BUREAU
VERITAS

Test Report No.: RJ2511WDG0188-2

V+10%
Channel 39

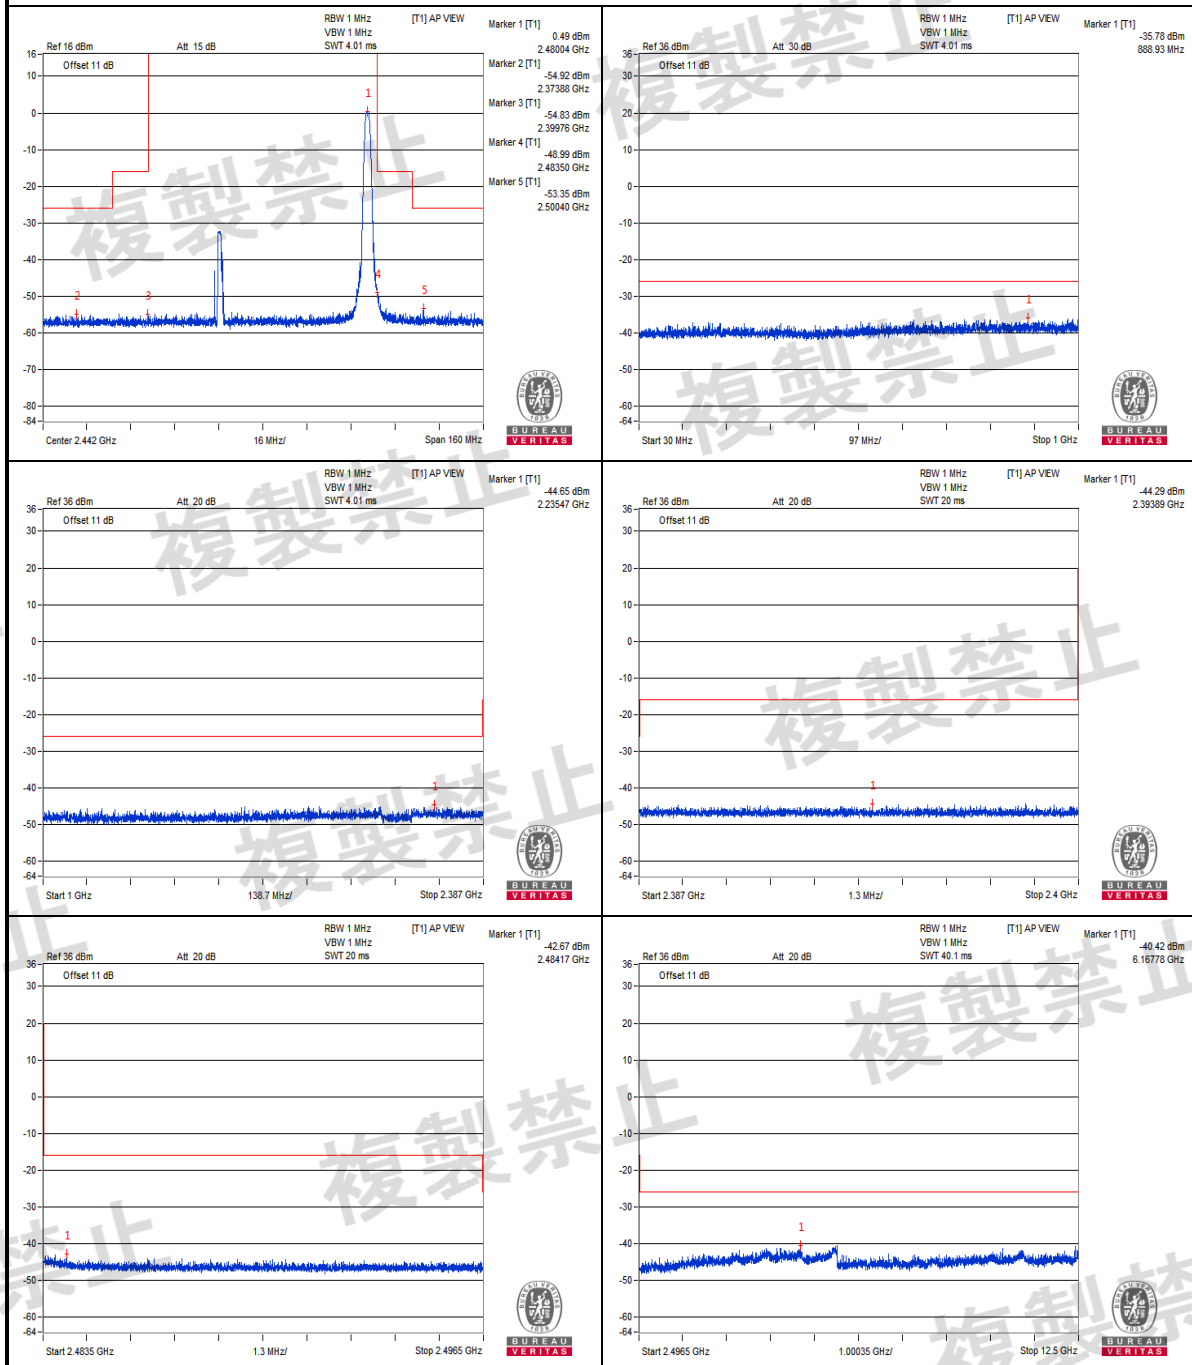

Measurement uncertainty: $\pm 3.93\text{dB}$




BUREAU
VERITAS

Test Report No.: RJ2511WDG0188-2

V-10%

Channel 0

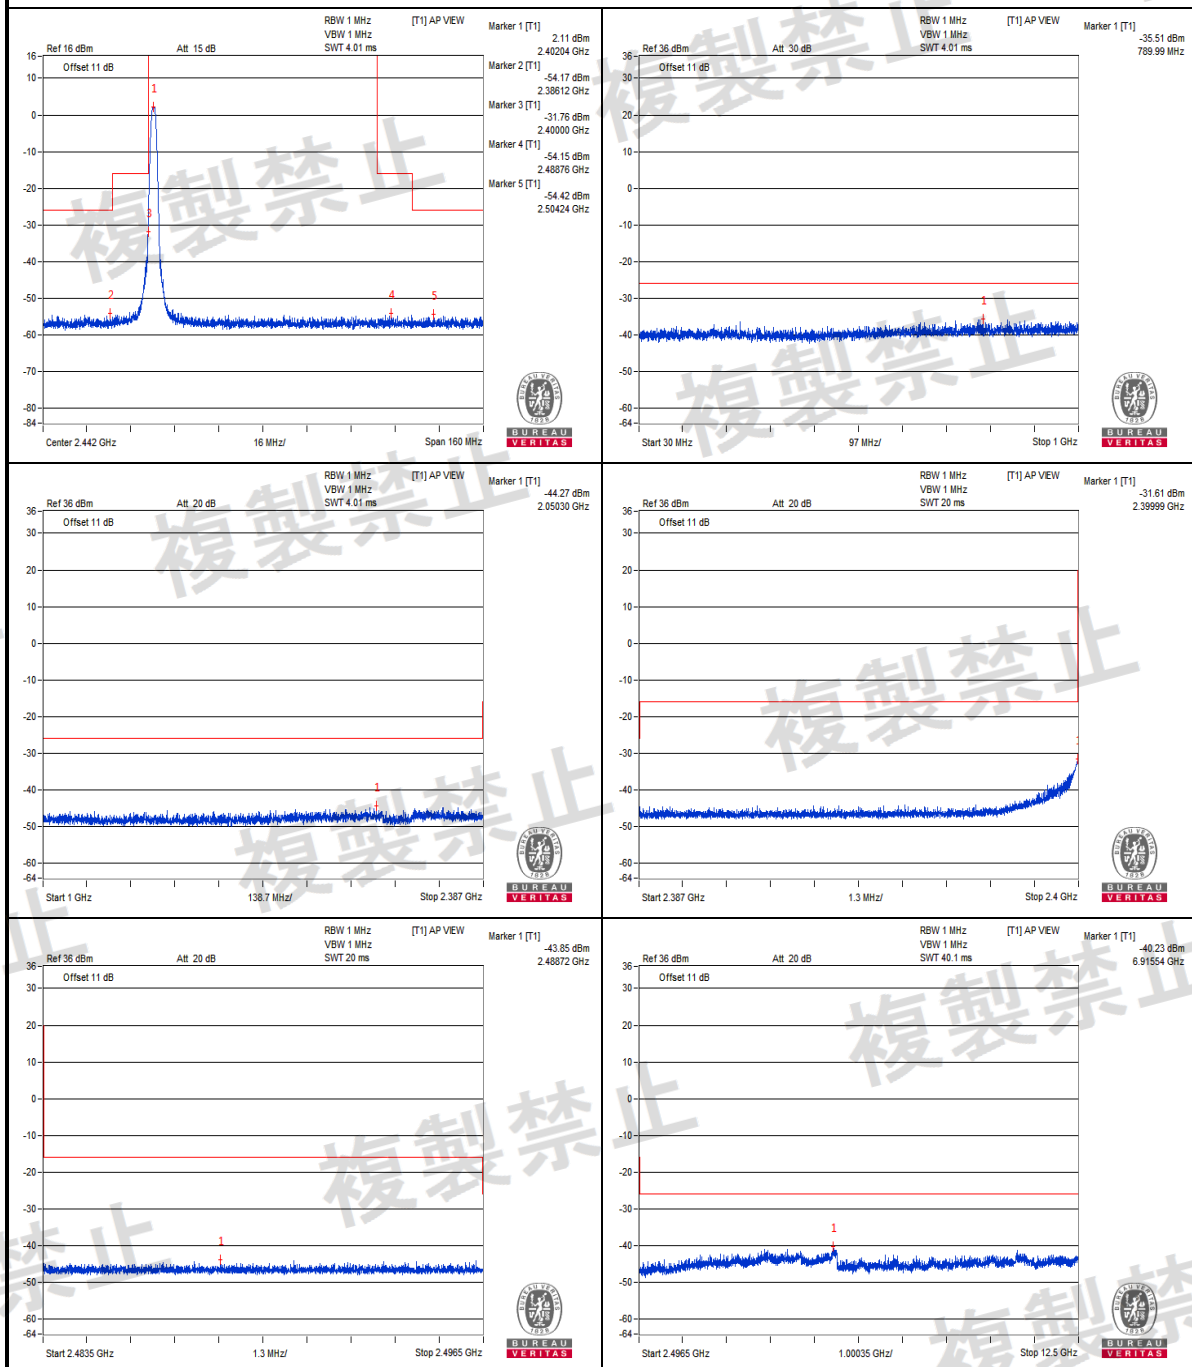


Measurement uncertainty: $\pm 3.93\text{dB}$



BUREAU
VERITAS

Test Report No.: RJ2511WDG0188-2

V-10%
Channel 19

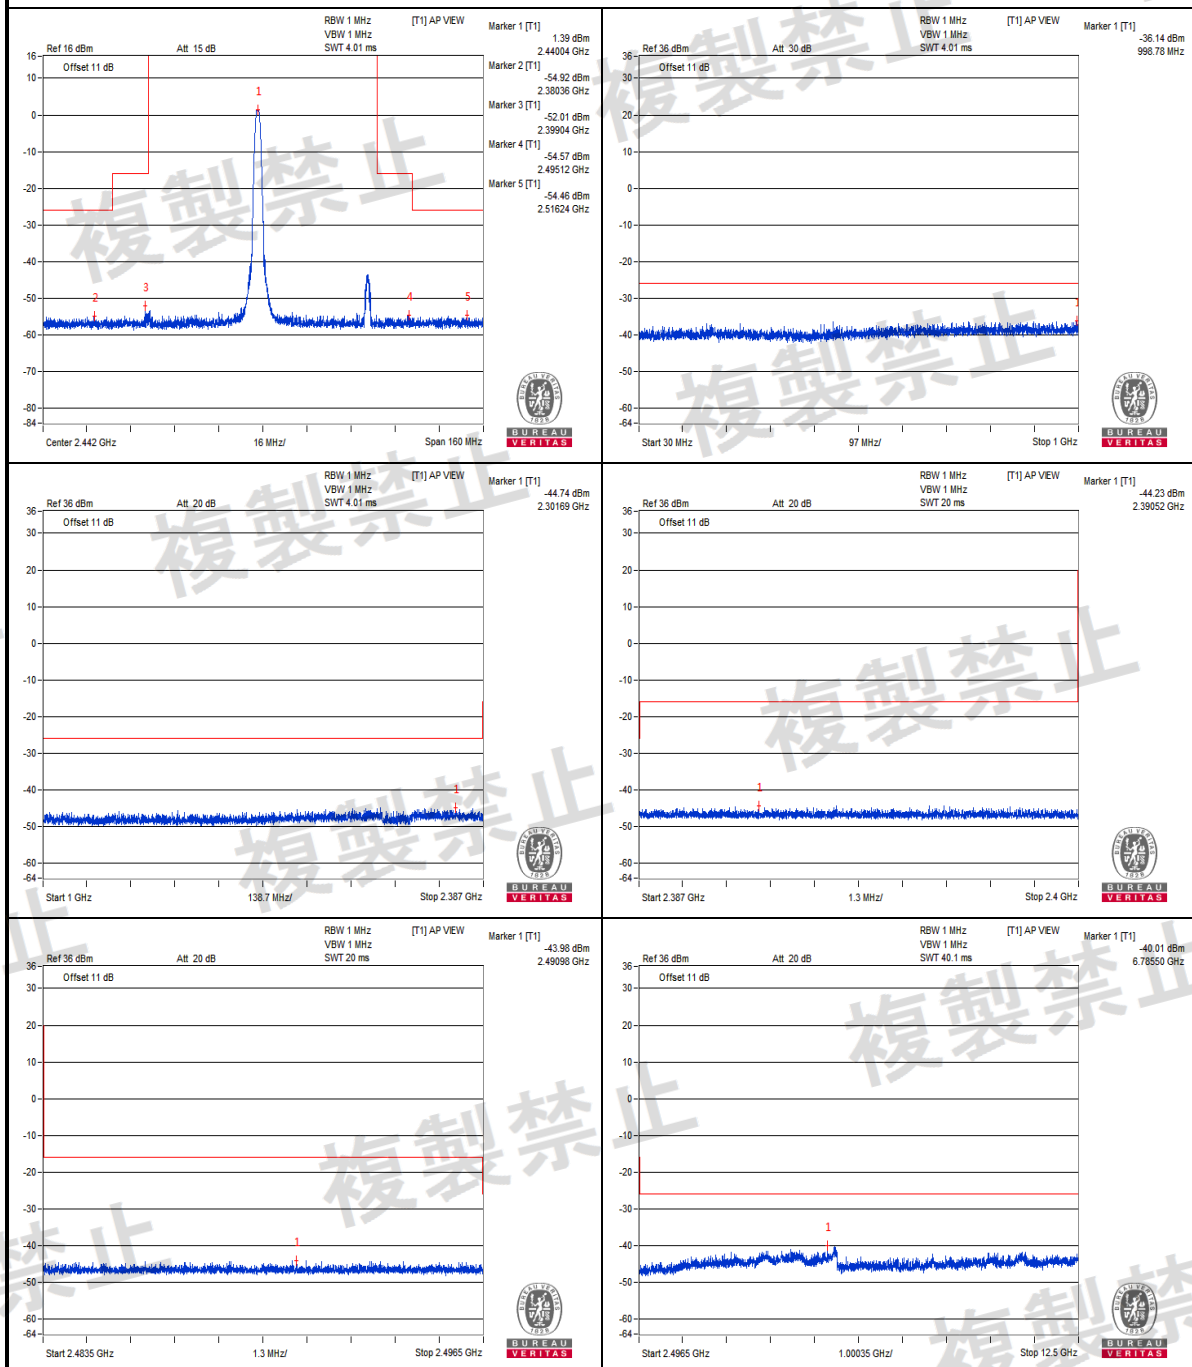


Measurement uncertainty: $\pm 3.93\text{dB}$



BUREAU
VERITAS

Test Report No.: RJ2511WDG0188-2

V-10%
Channel 39

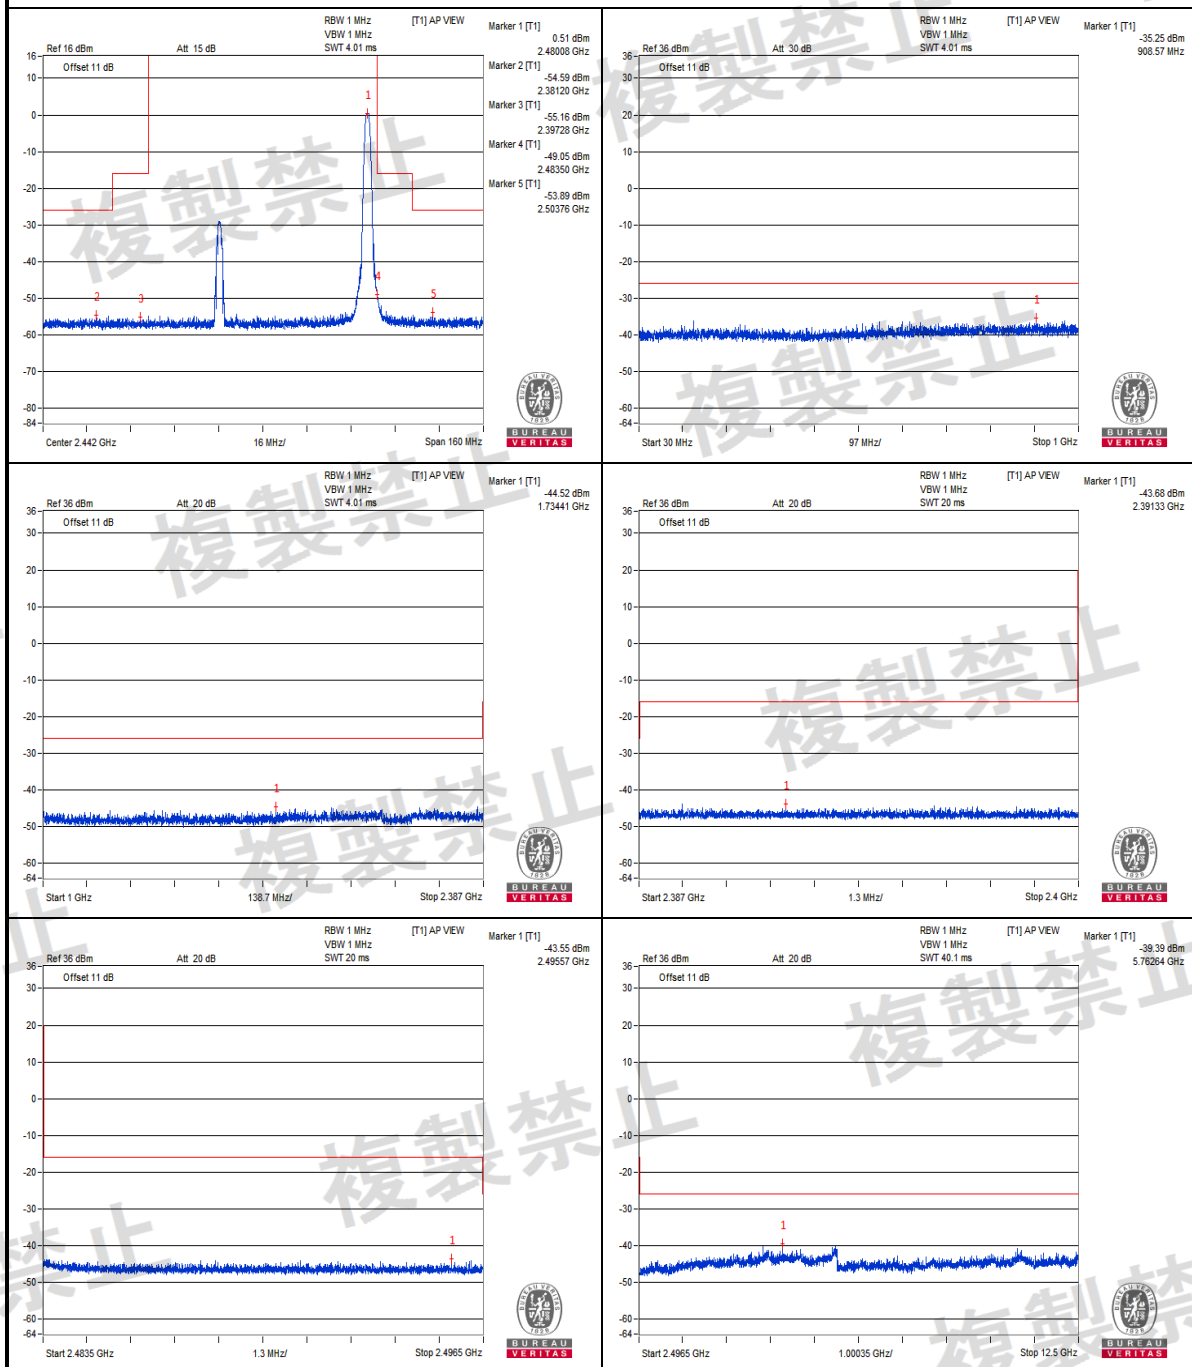

Measurement uncertainty: $\pm 3.93\text{dB}$



3.4 ANTENNA POWER MEASUREMENT

3.4.1 LIMITS OF ANTENNA POWER

Modulation system	Frequency band used	Antenna power (max.)	EIRP (max)	
			Omni-directional case	Directional case
DS-OFDM (Narrow-Band)	2,400 – 2,4835 MHz	10mW/MHz	12.14 dBm/MHz (16.367 mW/MHz)	22.14 dBm/MHz (163.682 mW/MHz)
OFDM (Wide-Band)	2,400 – 2,4835 MHz	5mW/MHz	9.13dBm/MHz (8.185mW/MHz)	19.13dBm/MHz (81.846mW/MHz)
DTS	2,400 – 2,4835 MHz	10mW	12.14 dBm 16.367 mW	22.14 dBm 163.682 mW

Tolerance of antenna power shall be +20% (upper value).


According article 49.20 f(2) The angular width of the principal radiation in the horizontal and vertical planes of the transmitting antenna shall not exceed the value obtained by the following expression. $360/A$ degree

A represents the value determined by dividing an equivalent isotropically radiated power by the value obtained by applying an antenna power with the mean power of 10 mW to the transmitting antenna with its absolute gain being 2.14 dB, and shall be 1 when it is lower than 1

3.4.2 TEST METHOD

According to MIC Notice No. 88 Appendix 43.

3.4.3 TEST SETUP

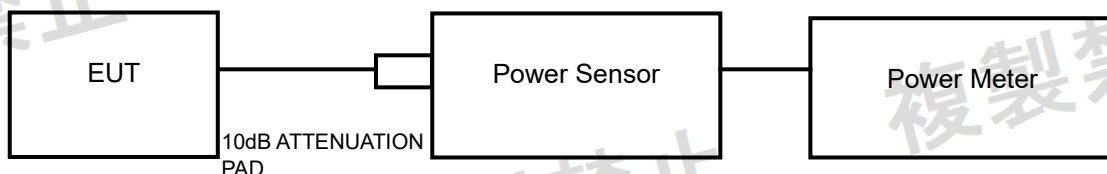



BUREAU
VERITAS

Test Report No.: RJ2511WDG0188-2

3.4.4 TEST RESULTS

BT-LE (GFSK 1 Mbps)

ENVIRONMENTAL CONDITIONS	25 deg.C, 56% RH			
TEST CONDITION	Conducted RF output power (mW)			
	CHANNEL 0 2402MHz	CHANNEL 19 2440MHz	CHANNEL 39 2480MHz	MAX. LIMIT (mW)
V _{normal}	2.143	1.866	1.489	10
V _{+10%}	2.173	1.892	1.510	10
V _{-10%}	2.109	1.845	1.472	10
RATED POWER	3			
TOLERANCE OF ANTENNA POWER	<3.6			

ENVIRONMENTAL CONDITIONS	25 deg.C, 56% RH			
TEST CONDITION	EIRP output power (mW)			
	CHANNEL 0 2402MHz	CHANNEL 19 2440MHz	CHANNEL 39 2480MHz	MAX. LIMIT (mW)
V _{normal}	0.977	0.851	0.679	16.367
V _{+10%}	0.991	0.863	0.689	16.367
V _{-10%}	0.962	0.841	0.671	16.367

NOTES: 1. The EIRP output power is a “calculated” value derived from the conducted value.

2. Formula: EIRP output power = Conducted RF output power + Antenna Gain.



3.5 SPURIOUS EMISSIONS FOR RECEIVER

3.5.1 LIMITS OF SPURIOUS EMISSIONS FOR RECEIVER

FREQUENCIES (MHz)	LIMIT
Below 1GHz	$\leq 4\text{nW}$ (-54dBm)
Above 1GHz	$\leq 20\text{nW}$ (-47dBm)

3.5.2 TEST METHOD

According to MIC Notice No. 88 Appendix 43.

3.5.3 TEST SETUP





3.5.4 SUMMARY OF TEST RESULT

BT-LE (GFSK 1 Mbps)

TEST CHANNEL		CH 0 (2402MHz)		CH 19 (2440MHz)		LIMIT	RESULT
TEST CONDITION	FREQUENCY RANGE	FREQUENCY (MHz)	MEASURE. VALUE	FREQUENCY (MHz)	MEASURE. VALUE		
Vnormal	below 1GHz	47.940	0.951086nW	47.940	1.289996nW	4nW	PASS
	above 1GHz	6922.500	0.784426nW	6994.370	0.973352nW	20nW	PASS
V+10%	below 1GHz	47.940	1.324434nW	47.940	1.273458nW	4nW	PASS
	above 1GHz	6971.370	0.805261nW	6890.870	0.832705nW	20nW	PASS
V-10%	below 1GHz	47.940	1.276263nW	47.940	1.281458nW	4nW	PASS
	above 1GHz	6149.120	0.761324nW	6899.500	1.002441nW	20nW	PASS
TEST CHANNEL		CH 39 (2480MHz)				LIMIT	RESULT
TEST CONDITION	FREQUENCY RANGE	FREQUENCY (MHz)		MEASURE. VALUE			
Vnormal	below 1GHz	47.940		1.238939nW		4nW	PASS
	above 1GHz	5602.870		0.714119nW		20nW	PASS
V+10%	below 1GHz	47.940		0.885786nW		4nW	PASS
	above 1GHz	5387.250		0.720873nW		20nW	PASS
V-10%	below 1GHz	47.940		1.291365nW		4nW	PASS
	above 1GHz	6902.370		0.763689nW		20nW	PASS

NOTES: 1. The worst value in each frequency range v.s. each channel has been marked by boldface.



2. The spectrum plots are attached on the following pages.





BUREAU
VERITAS

Test Report No.: RJ2511WDG0188-2



Vnormal

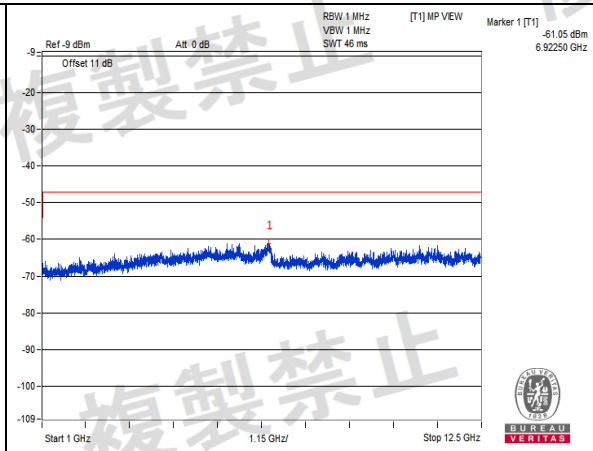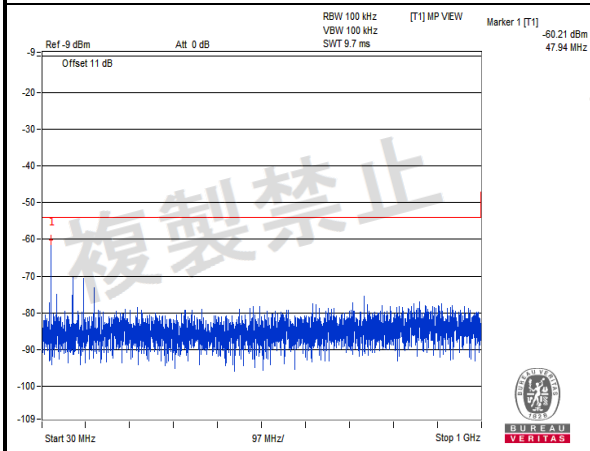

Channel 0

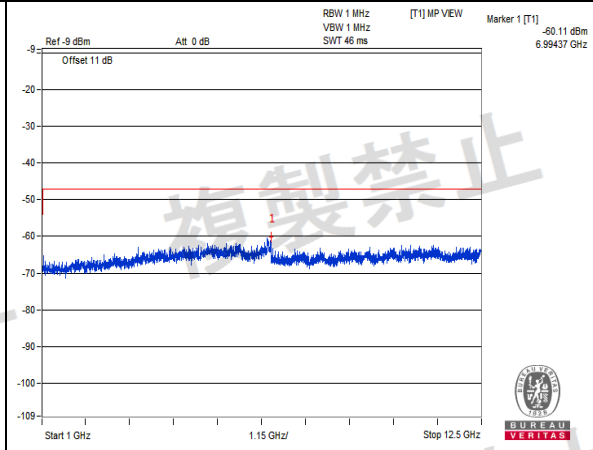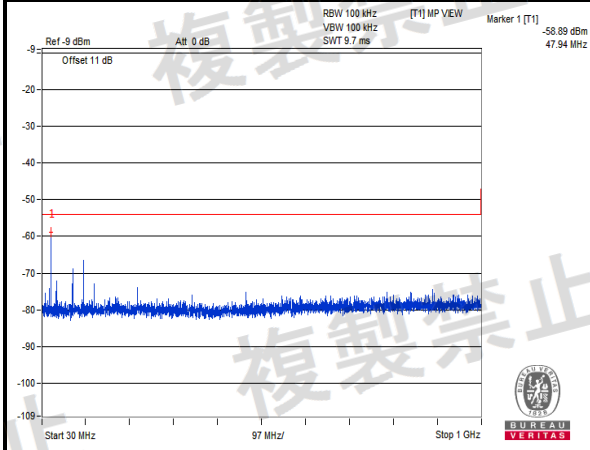

Channel 19

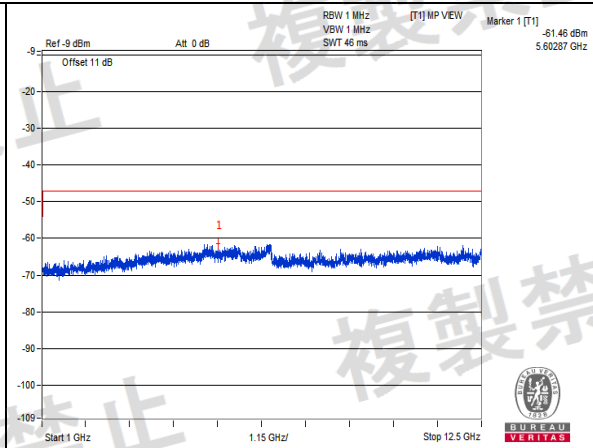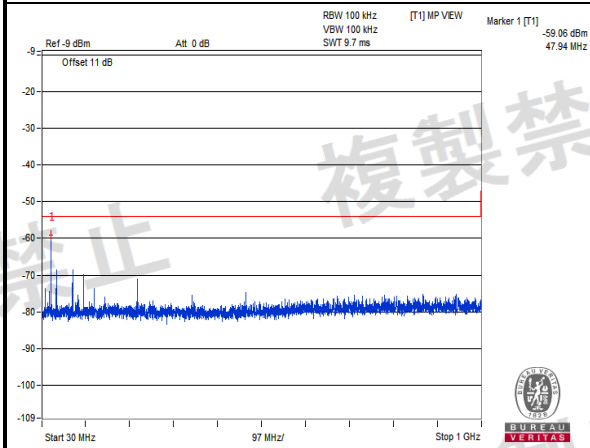

Channel 39


Measurement uncertainty: $\pm 3.93\text{dB}$




BUREAU
VERITAS

Test Report No.: RJ2511WDG0188-2


V+10%

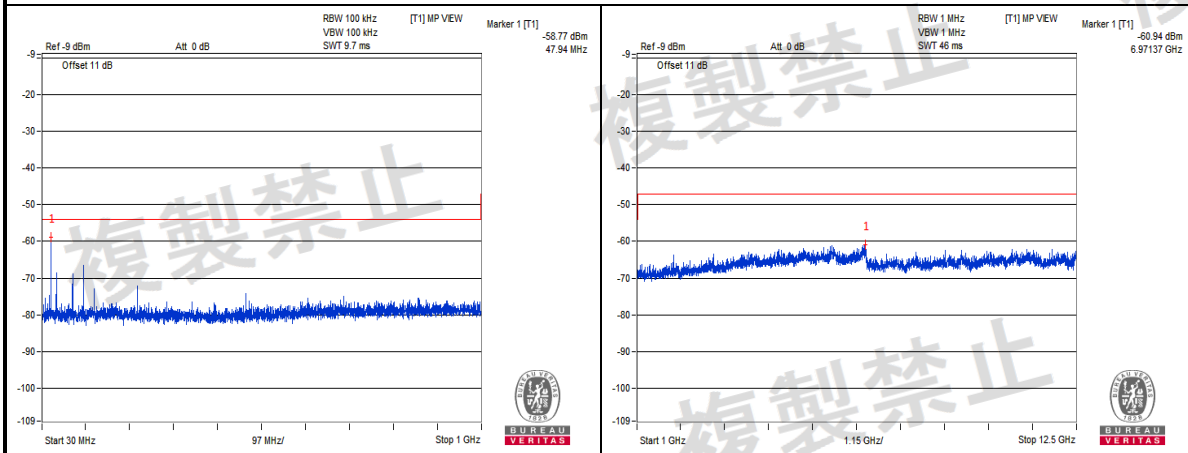

Channel 0

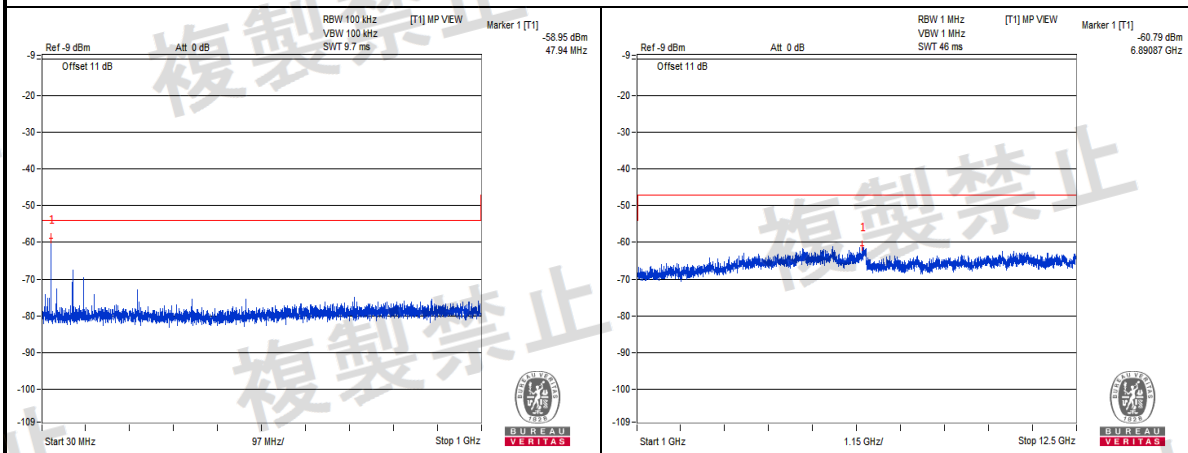

Channel 19

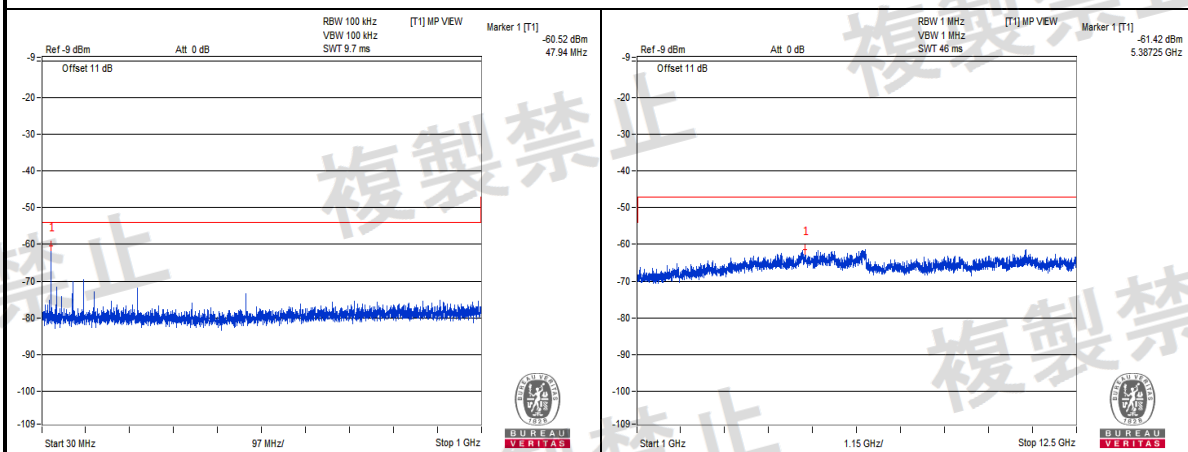

Channel 39


Measurement uncertainty: $\pm 3.93\text{dB}$




BUREAU
VERITAS

Test Report No.: RJ2511WDG0188-2


V-10%

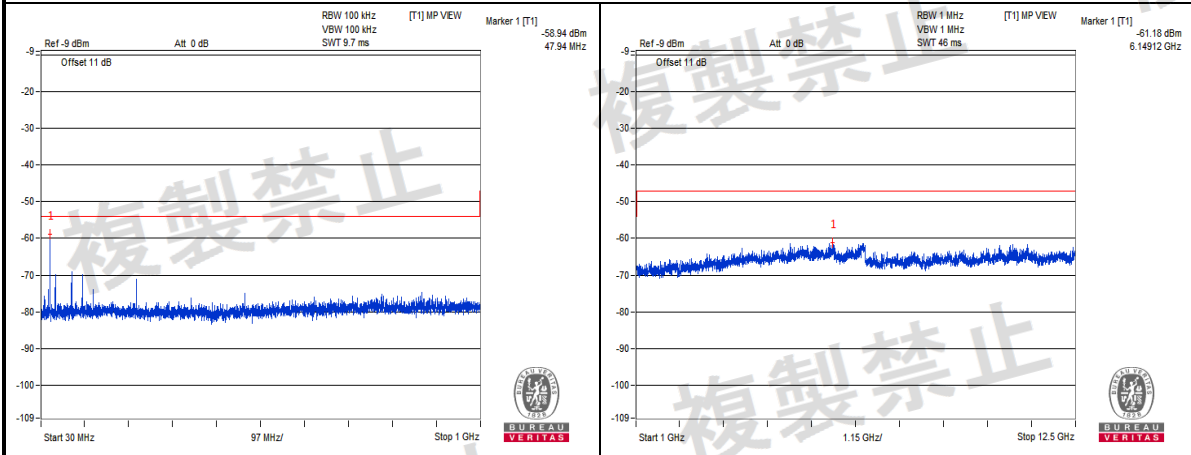

Channel 0

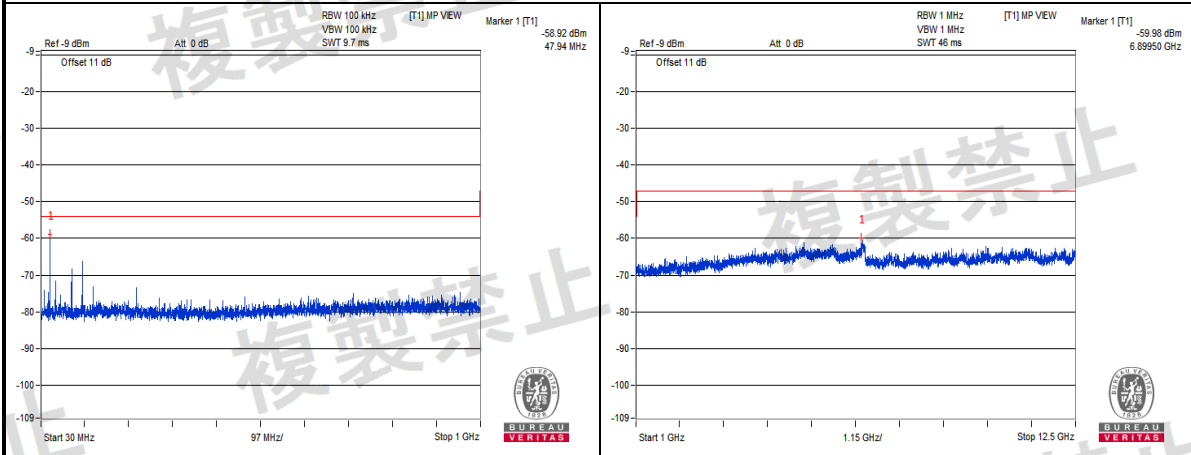

Channel 19

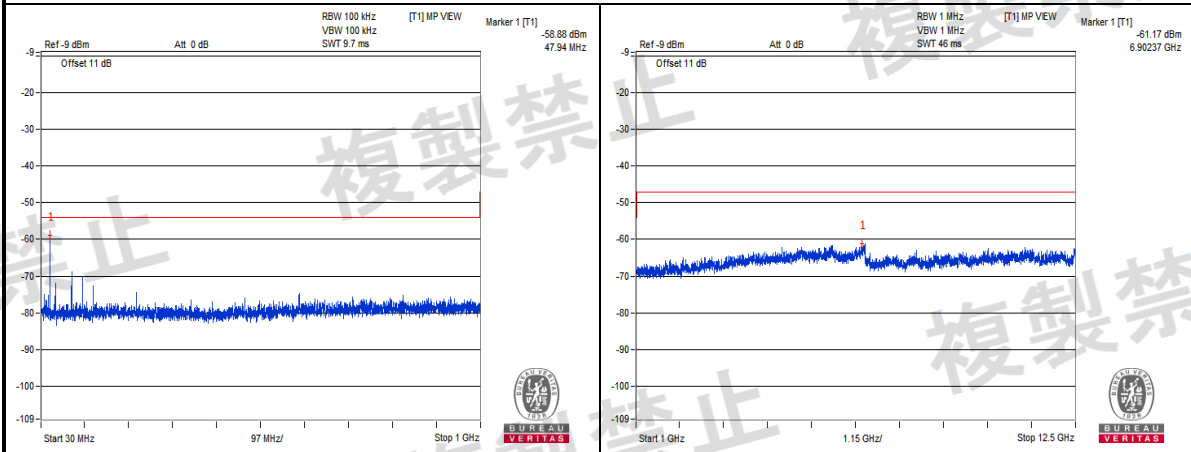

Channel 39

Measurement uncertainty: $\pm 3.93\text{dB}$



3.6 INTERFERENCE PREVENTION FUNCTION

3.6.1 LIMITS OF INTERFERENCE PREVENTION FUNCTION


Item	Limits
Identification	≥48bits

Note: In ASCII, a character usually takes 8 bits.

3.6.2 TEST METHOD

According to MIC Notice No. 88 Appendix 43.

3.6.3 TEST SETUP

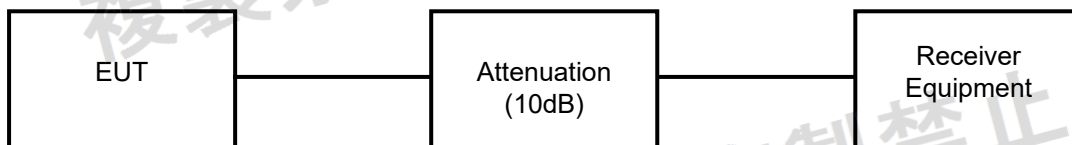

3.6.4 TEST RESULTS

ENVIRONMENTAL CONDITIONS	25 deg.C, 56% RH
LINK MODE	TEST RESULT
BT-LE	PASS
MAC Address	A4:C1:D6:00:00:E7



4 TEST INSTRUMENTS

Equipment	Manufacturer	Model No.	Serial No.	Next Cal.	Calibration Body	Calibration Method
Power Sensor	Keysight	U2021XA	MY57320002	Apr. 07, 26	GRGT	C
Digital Multimeter	FLUKE	15B	12151063	Jun. 03, 26	GRGT	C
Humid & Temp Programmable Tester	Haida	HD-225T	110807201	Oct. 10, 26	GRGT	C
Signal and Spectrum Analyzer	Rohde&Schwarz	FSV40	101003	Oct. 09, 26	GRGT	C
Signal Generator	Agilent	N5183A	MY50140980	Jul. 06, 26	GRGT	C
MXG-B RF Vector Signal Generator	Keysight	N5182B	MY56200288	Jul. 06, 26	GRGT	C
Attenuator	MINI	BW-S10W2+	S130129FGE2	Oct. 09, 26	Internal	C
DC Source	Rohde&Schwarz	HMP2020	101295	Jun. 03, 26	GRGT	C
Test software	ADT	ADT_RF Test Software V6.6.5.3	N/A	N/A	N/A	C

NOTES:

1. The test was performed in RF Oven room.
2. Equipment are calibrated by calibration laboratory accredited to ISO/IEC 17025 by a mutually recognized Accreditation and all tests are conducted within a valid calibration cycle.

Calibration Method:


- a) Calibration conducted by the National Institute of Information and Communications Technology (NICT) (hereinafter referred to as "NICT") or a designated calibration agency under Article 102-18 paragraph (1)
- b) Correction conducted pursuant to the provisions of Article 135 or Article 144 of the Measurement Law (Law No. 51 of 1992)
- c) Calibration conducted in foreign countries, which shall be equivalent to the calibration conducted by the NICT or a designated calibration agency under Article 102-18 paragraph (1)
- d) Calibration conducted by using measuring instruments and other equipment listed in the right column of Table No. 3 attached hereto, which shall have been given any of calibration, etc. listed above from a) to c)



BUREAU
VERITAS

Test Report No.: RJ2511WDG0188-2

5 PHOTOGRAPHS OF THE TEST CONFIGURATION

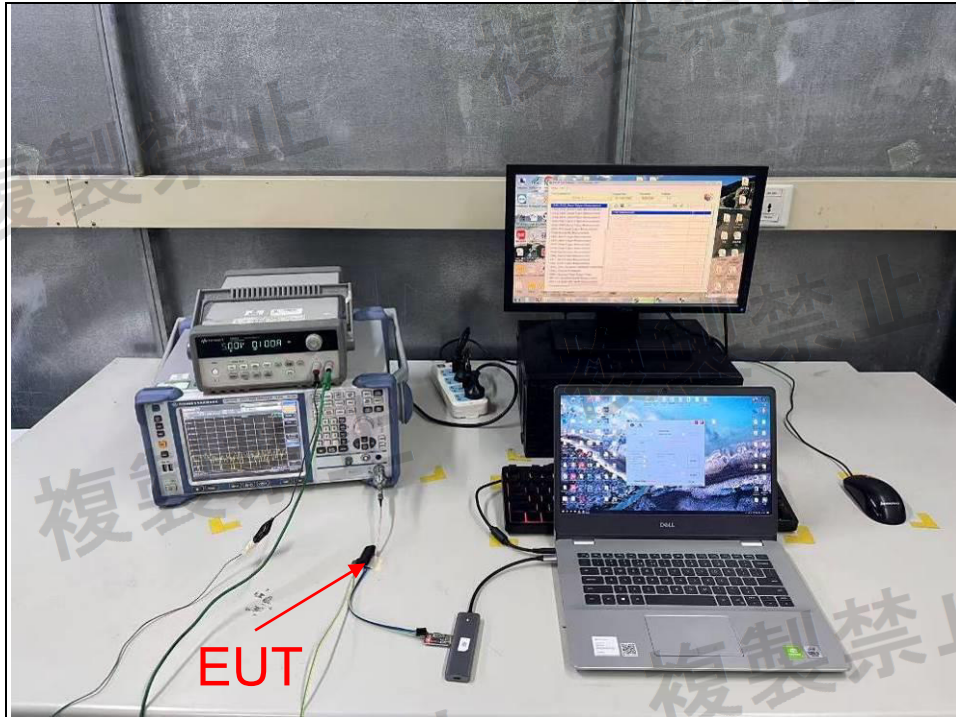



BUREAU
VERITAS

Test Report No.: RJ2511WDG0188-2

6 APPENDIX A – MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB

No modifications were made to the EUT by the lab during the test.

--- END ---