

Japan Specified Radio Test Report

Report No. : 1819C50011612501

Applicant : CYBER Gadget Corporation

Address : SUEHIRO BLDG 3F, 5-1-2 Sotokanda Chiyoda-ku
TOKYO 1010021 Japan

Product Name : CY-GMWEPS2 Gaming TWS 2.4G Dongle

Report Date : Mar. 27, 2025



Shenzhen Anbotek Compliance Laboratory Limited

Shenzhen Anbotek Compliance Laboratory Limited

Address: Sogood Industrial Zone Laboratory & 1/F. of Building D, Sogood Science and Technology Park,
Sanwei Community, Hangcheng Subdistrict, Bao'an District, Shenzhen, Guangdong, China
Tel: (86) 0755-26066440 Email: service@anbotek.com

Code: AB-RF-05-b

Hotline
400-003-0500
www.anbotek.com



Contents

1. General Information	6
1.1. Client Information	6
1.2. Description of Device (EUT)	6
1.3. Auxiliary Equipment Used During Test	7
1.4. Description of Test Configuration	7
1.5. Test Conditions	7
1.6. Test Voltage	8
1.7. Test Equipment List	8
1.8. Description of Test Facility	9
1.9. Disclaimer	9
1.10. Measurement Uncertainty	10
2. Summary Of Test Results	11
3. Frequency Tolerance Test	12
3.1. Test Limit	12
3.2. Test Setup	12
3.3. Test Procedure	12
3.4. Test Data	12
4. Antenna Power Test	13
4.1. Test Limit	13
4.2. Test Setup	13
4.3. Test Configuration	13
4.4. Test Data	13
5. Occupied Bandwidth (99%) Test	14
5.1. Test Limit	14
5.2. Test Setup	14
5.3. Test Procedure	14
5.4. Test Data	14
6. Spread-Spectrum Bandwidth (90%) Test	15
6.1. Test Limit	15
6.2. Test Setup	15
6.3. Test Procedure	15
6.4. Test Data	15
7. Spurious Emissions Intensity Test	16
7.1. Test Limit	16
7.2. Test Setup	16
7.3. Test Procedure	16
7.4. Test Data	16
8. Interference Prevention Function	17
8.1. Test Limit	17
8.2. Test Setup	17



8.3. Test Configuration	17
8.4. Test Data	17
9. Secondary Radiated Emissions Test	18
9.1. Test Limit	18
9.2. Test Setup	18
9.3. Test Configuration	18
9.4. Test Data	18
10. Dwell Time Measurement	19
10.1. Test Limit	19
10.2. Test Setup	19
10.3. Test Configuration	19
10.4. Test Data	19
APPENDIX I -- TEST SETUP PHOTOGRAPH	20
APPENDIX II -- EXTERNAL PHOTOGRAPH	20
APPENDIX III -- INTERNAL PHOTOGRAPH	20



TEST REPORT

Applicant : CYBER Gadget Corporation
Manufacturer : AVC TECHNOLOGY (INTERNATIONAL)LTD
Product Name : CY-GMWEPS2 Gaming TWS 2.4G Dongle
Model No. : CY-GMWEPS2 2.4G Dongle
Trade Mark : CYBER Gadget
Rating(s) : Input: DC 5V

Test Standard(s) : MIC Notice No.88 Appendix No.43
Article 2, paragraph 1, item 19

The device described above is tested by Shenzhen Anbotek Compliance Laboratory Limited to determine the maximum emission levels emanating from the device and the severe levels of the device can endure and its performance criterion. The measurement results are contained in this test report and Shenzhen Anbotek Compliance Laboratory Limited is assumed full of responsibility for the accuracy and completeness of these measurements. Also, this report shows that the EUT (Equipment Under Test) is technically compliant with the MIC Notice No.88 Appendix No.43 and Certificate regulation article 2, paragraph 1, item 19 requirements.

This report applies to above tested sample only and shall not be reproduced in part without written approval of Shenzhen Anbotek Compliance Laboratory Limited.

Date of Receipt:

Jun. 25, 2024

Date of Test:

Jun. 25, 2024 to Aug. 14, 2024

Prepared By:

Cecilia Chen

(Cecilia Chen)

Approved & Authorized Signer:

Kingkong Jin

(Kingkong Jin)



Revision History

Report Version	Description	Issued Date
R00	Original Issue.	Aug. 14, 2024
R01	Reference Note 1	Mar. 27, 2025

Note 1:
This is the amended report application which was based on the original report 182519C400113101.
Test sample: S-PLAY 2 - Wireless Gaming and Entertainment Earbuds 2.4G Dongle, test model: 2.4G Dongle. The difference between the original device and current one described as following:

1. Change the model name to "CY-GMWEPS2 2.4G Dongle".
2. Change the product name to "CY-GMWEPS2 Gaming TWS 2.4G Dongle".
3. Change the company name and address of Applicant, Manufacturer.
4. Change the trade mark to "CYBER Gadget".

The changes will not affect the related test result, the tests will retain the original test results.



1. General Information

1.1. Client Information

Applicant	:	CYBER Gadget Corporation
Address	:	SUEHIRO BLDG 3F, 5-1-2 Sotokanda Chiyoda-ku TOKYO 1010021 Japan
Manufacturer	:	AVC TECHNOLOGY (INTERNATIONAL)LTD
Address	:	6/F, Enterprise Square Three. 39 Wang Chiu Road, Kowloon Bay, Hong Kong
Factory	:	Dongguan Harmony Electronic Technology Co., Ltd.
Address	:	Room 101, No. 3, Jiankai Road, Shipai Town, Dongguan City, China

1.2. Description of Device (EUT)

Product Name	:	CY-GMWEPS2 Gaming TWS 2.4G Dongle
Model No.	:	CY-GMWEPS2 2.4G Dongle
Trade Mark	:	CYBER Gadget
Test Power Supply	:	DC 5V from Mobile phone
Test Sample No.	:	1-2-1(Normal Sample), 1-2-2(Engineering Sample)
Hardware Version	:	V2.2
Software Version	:	V0.3
Adapter	:	N/A

RF Specification

Operation Mode	:	☒ BT BDR ☒ BT EDR
Operation Frequency	:	2402~2480MHz
Number of Channel	:	79 Channels
Modulation Type	:	GFSK, $\pi/4$ -DQPSK, 8DPSK
Antenna Type	:	Ceramic Antenna
Antenna Gain(Peak)	:	2.73dBi
Rated output Power	:	0.03mW/MHz Max.

Remark: (1) All of the RF specification are provided by customer. (2) For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.



1.3. Auxiliary Equipment Used During Test

Title	Manufacturer	Model No.	Serial No.
HUAWEI Mobile	HUAWEI	JAT-AL00	TMENW19925001206

1.4. Description of Test Configuration

The EUT has been tested under typical operating condition. The Applicant provides software to control the EUT for staying in continuous transmitting and receiving mode for testing.

Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)
00	2402	17	2419	34	2436	51	2453	68	2470
01	2403	18	2420	35	2437	52	2454	69	2471
02	2404	19	2421	36	2438	53	2455	70	2472
03	2405	20	2422	37	2439	54	2456	71	2473
04	2406	21	2423	38	2440	55	2457	72	2474
05	2407	22	2424	39	2441	56	2458	73	2475
06	2408	23	2425	40	2442	57	2459	74	2476
07	2409	24	2426	41	2443	58	2460	75	2477
08	2410	25	2427	42	2444	59	2461	76	2478
09	2411	26	2428	43	2445	60	2462	77	2479
10	2412	27	2429	44	2446	61	2463	78	2480
11	2413	28	2430	45	2447	62	2464		
12	2414	29	2431	46	2448	63	2465		
13	2415	30	2432	47	2449	64	2466		
14	2416	31	2433	48	2450	65	2467		
15	2417	32	2434	49	2451	66	2468		
16	2418	33	2435	50	2452	67	2469		

Note: EUT was tested with channel 0, 39 and 78.

1.5. Test Conditions

	Normal Test Conditions
Temperature	15°C - 35°C
Relative Humidity	45% - 75%
Pressure Range	86-106kPa



1.6. Test Voltage

Power Supply Voltage Fluctuation Test

Voltage Fluctuation Test	Normal Voltage	High Voltage +10% of Normal Voltage	Low Voltage -10% of Normal Voltage
Input To EUT	DC 5.00V	DC 5.50V	DC 4.50V
Output To RF Module	DC 3.30V	DC 3.34V	DC 3.23V
Voltage Variation (%)	--	1.21%	-2.12%

Note: Voltage Variation (%)=(Output high or Low Voltage - Output Normal Voltage)/ Output Normal Voltage* 100

For extreme voltage test, we have tested the relationship between the external power supply and RF IC power supply. Base on the test results, both normal voltage and extreme voltage are perform all items.

1.7. Test Equipment List

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal.Due Date
1	Spectrum Analyzer	Rohde & Schwarz	FSV40-N	102150	2024-05-06	2025-05-05
2	MXA Spectrum Analysis	KEYSIGHT	N9020A	MY50531823	2023-10-12	2024-10-11
3	MXG RF Vector Signal Generator	Agilent	N5182A	MY47420647	2024-02-04	2025-02-03

Note:

The above test equipment is calibrated by Guangzhou LiSai Metrology & Test Co.,Ltd.
Calibration method reference Article 24-2, Paragraph 4 of the Radio Act. (method c)

4	Constant Temperature Humidity Chamber	ZHONGJIAN	ZJ-KHWS80B	N/A	2023-10-16	2024-10-15
---	---------------------------------------	-----------	------------	-----	------------	------------

Note:

The test equipment is calibrated by GUANGZHOU NEM METROLOGY&TEST TECHNOLOGY CO.,LTD
Calibration method reference Article 24-2, Paragraph 4 of the Radio Act. (method c)

5	DC Power Supply	IVYTECH	IV3605	1804D360510	2023-10-20	2024-10-19
---	-----------------	---------	--------	-------------	------------	------------

Note:

The test equipment is calibrated by Centre Testing International Group Co., Ltd. (CTI)
Calibration method reference Article 24-2, Paragraph 4 of the Radio Act. (method c)

6	Oscilloscope	Tektronix	MDO3012	C020298	2023-10-12	2024-10-11
---	--------------	-----------	---------	---------	------------	------------

Note:

The test equipment is calibrated by Ti Testing & Certification Group Co., Ltd. Shenzhen Branch
Calibration method reference Article 24-2, Paragraph 4 of the Radio Act. (method c)



1.8. Description of Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

FCC-Registration No.: 434132

Shenzhen Anbotek Compliance Laboratory Limited, EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration No. 434132.

ISED-Registration No.: 8058A

Shenzhen Anbotek Compliance Laboratory Limited, EMC Laboratory has been registered and fully described in a report filed with the (ISED) Innovation, Science and Economic Development Canada. The acceptance letter from the ISED is maintained in our files. Registration 8058A.

Test Location

Shenzhen Anbotek Compliance Laboratory Limited.

Sogood Industrial Zone Laboratory & 1/F. of Building D, Sogood Science and Technology Park, Sanwei Community, Hangcheng Subdistrict, Bao'an District, Shenzhen, Guangdong, China.

1.9. Disclaimer

1. The test report is invalid if not marked with the signatures of the persons responsible for preparing and approving the test report.
2. The test report is invalid if there is any evidence and/or falsification.
3. The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein.
4. This document may not be altered or revised in any way unless done so by Anbotek and all revisions are duly noted in the revisions section.
5. Content of the test report, in part or in full, cannot be used for publicity and/or promotional purposes without prior written approval from the laboratory.
6. The authenticity of the information provided by the customer is the responsibility of the customer and the laboratory is not responsible for its authenticity.

The laboratory is only responsible for the data released by the laboratory, except for the part provided by the applicant.



1.10. Measurement Uncertainty

Parameter	Uncertainty
Occupied Bandwidth	925Hz
Conducted Output Power	0.76dB
Conducted Spurious Emission	1.24dB
Frequency tolerance	74.60Hz
Dwell Time	2%
The measurement uncertainty and decision risk evaluated according to AB/WI-RF-F-032. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.	



2. Summary Of Test Results

Test Standard	Description of Test	Result
MIC Notice No.88 Appendix No.43 Article 2 Paragraph 1 Item 19	Frequency Tolerance	Complies
	Antenna power	Complies
	EIRP	Complies
	Antenna Power Tolerance	Complies
	Occupied Bandwidth	Complies
	Spread Bandwidth	Complies
	Spurious Emissions	Complies
	Carrier sensing function 1	N/A*
	Carrier sensing function 2	N/A**
	Interference prevention function	Complies
	Secondary Radiated Emissions	Complies
	Dwell Time	Complies
	Transmission Radiated Angle Width (3dB Beam Bandwidth)	N/A***
	Antenna Absolute Gain	N/A***

Note:

(1) N/A is an abbreviation for Not Applicable.

(2) This device have more than 1 subcarrier in 1MHz, compliance with the requirement.

*: Application to transmitting devices which EIRP is less than (2.14dBi + antenna power limit) and the shortage of EIRP is compensated by the antenna power. Not applicable to this product.

**: Application to transmitting devices with OFDM modulation and the occupied bandwidth greater than 26MHz.

***: Application to EIRP more than 6.91dBm/MHz.



3. Frequency Tolerance Test

3.1. Test Limit

Test Limit	± 50 ppm
------------	--------------

3.2. Test Setup



3.3. Test Procedure

Test Frequency= test channel

RBW=VBW=10kHz

Span=1MHz

Sweep time=Auto

Detector mode=Positive peak

Indication mode=Max hold

3.4. Test Data

PASS

Please refer to Appendix A of the Appendix Test Data.



4. Antenna Power Test

4.1. Test Limit

No.	Modulation Method	Frequency Range	Antenna Power	E.I.R.P
1.	FHSS(Compound method with DSSS or OFDM) (OBW within 83.5MHz)	2427-2470.75 MHz	3mW/MHz or less	6.91-16.91dBm/MHz
		2400-2483.5 MHz (except 2427-2470.75MHz)	10mW/MHz or less	12.14-22.14dBm/MHz
2.	DSSS (OBW within 26MHz)	2400 - 2483.5 MHz	10mW/MHz or less	12.14-22.14dBm/MHz
3.	OFDM (OBW within 26MHz)		10mW/MHz or less	12.14- - 22.14dBm/MHz
4.	OFDM (OBW 26-40MHz)		5mW/MHz or less	9.13-19.13dBm/MHz
5.	Other Digital methods (OBW within 26MHz)		10mW or less	12.14-22.14dBm
6.	Tolerance	+20%		

4.2. Test Setup



4.3. Test Configuration

1. Search Frequency of Peak Power

Test Frequency: test channel,

RBW=VBW=1MHz, Span=2400-2483.5MHz, Sweep time=Auto, Detector mode =Positive peak

2. Measure of average burst power

Test Frequency: frequency of peak power

RBW=VBW=1MHz, Span=0Hz, Sweep time=Auto, Detector mode=RMS

3. Antenna power= Average burst power / Spread bandwidth

4.4. Test Data

Pass

Please refer to Appendix B of the Appendix Test Data.



5. Occupied Bandwidth (99%) Test

5.1. Test Limit

Modulation type	Limit
FH:	83.5MHz or less
FH + DS:	83.5MHz or less
FH + OFDM:	83.5MHz or less
OFDM:	40MHz or less
Others:	26MHz or less

5.2. Test Setup



5.3. Test Procedure

Test Frequency= test channel

RBW=VBW=1MHz

Span=5MHz

Sweep time=Auto

Detector mode=Positive peak

Indication mode=Max hold

5.4. Test Data

PASS

Please refer to Appendix C of the Appendix Test Data.




6. Spread-Spectrum Bandwidth (90%) Test

6.1. Test Limit

Test Limit	N/A
------------	-----

6.2. Test Setup



6.3. Test Procedure

Test Frequency= test channel

RBW=VBW=1MHz

Span=200MHz

Sweep time=Auto

Detector mode=Positive peak

Indication mode=Max hold

6.4. Test Data

Pass

Please refer to Appendix D of the Appendix Test Data.



7. Spurious Emissions Intensity Test

7.1. Test Limit

Frequency Range	Test Limit
≤2387MHz	≤2.5μW (-26dBm)
2387MHz to 2400MHz	≤25μW (-16dBm)
2483.5MHz to 2496.5MHz	≤25μW (-16dBm)
≥2496.5MHz	≤2.5μW (-26dBm)

7.2. Test Setup



7.3. Test Procedure

Test Frequency: test channel,

RBW=VBW=1MHz, Sweep time=Auto, Detector mode=Positive peak

7.4. Test Data

Please refer to Appendix E of the Appendix Test Data.

Note: SA set to from 2.4965GHz to 13GHz, plot shows from 2.497GHz to 13GHz as of SA's default format.




8. Interference Prevention Function

8.1. Test Limit

Test Limit	The identification code shall be 48 bits long
------------	---

8.2. Test Setup

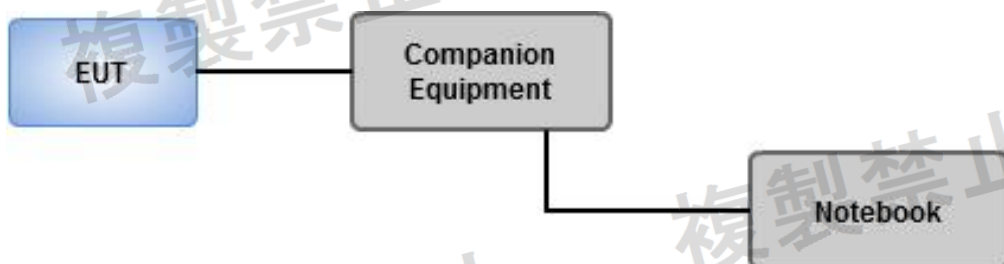

8.3. Test Configuration

1. Set EUT under operating mode and link up with companion equipment
2. Check communication status between EUT and companion equipment is normal
3. Record the max. reading.
4. Confirm the MAC address of EUT

8.4. Test Data

Test Mode	ID Code	Test Results
BDR+EDR	B9:00:8C:EA:15:AD	Complies



9. Secondary Radiated Emissions Test

9.1. Test Limit

Frequency Range	Test Limit
30~ 1000MHz	$\leq 4.0\text{nW}$ (-54dBm)
1000~ 12500MHz	$\leq 20\text{nW}$ (-47dBm)

9.2. Test Setup



9.3. Test Configuration

Test Frequency: test channel,

Below 1GHz, RBW=VBW=100kHz;

Above 1GHz, RBW=VBW=1MHz,

Sweep time=Auto, Detector mode=Positive peak

9.4. Test Data

Pass

Please refer to Appendix F of the Appendix Test Data.




10. Dwell Time Measurement

10.1. Test Limit

Test Limit	0.4 second or less
------------	--------------------

10.2. Test Setup



10.3. Test Configuration

Test Frequency: test channel,

RBW=1MHz, VBW=3MHz, Span=0MHz, Detector mode=Positive peak

Total Dwell Time = On time Burst x On time Burst number in 31.6s

$31.6 = (0.4 \times \text{Number of hopping channels})$ [Notes]

a. Numerical Coefficient (0.4) is a dimensionless number defined in the technical standard

10.4. Test Data

Pass

Please refer to Appendix G of the Appendix Test Data.



APPENDIX I -- TEST SETUP PHOTOGRAPH

Please refer to separated files Appendix I -- Test Setup Photograph_RF

APPENDIX II -- EXTERNAL PHOTOGRAPH

Please refer to separated files Appendix II -- External Photograph

APPENDIX III -- INTERNAL PHOTOGRAPH

Please refer to separated files Appendix III -- Internal Photograph

----- End of Report -----

