


Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 110 V/60 Hz
Frequency:	5230 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 10		
Ant.Polar.:	Horizontal		

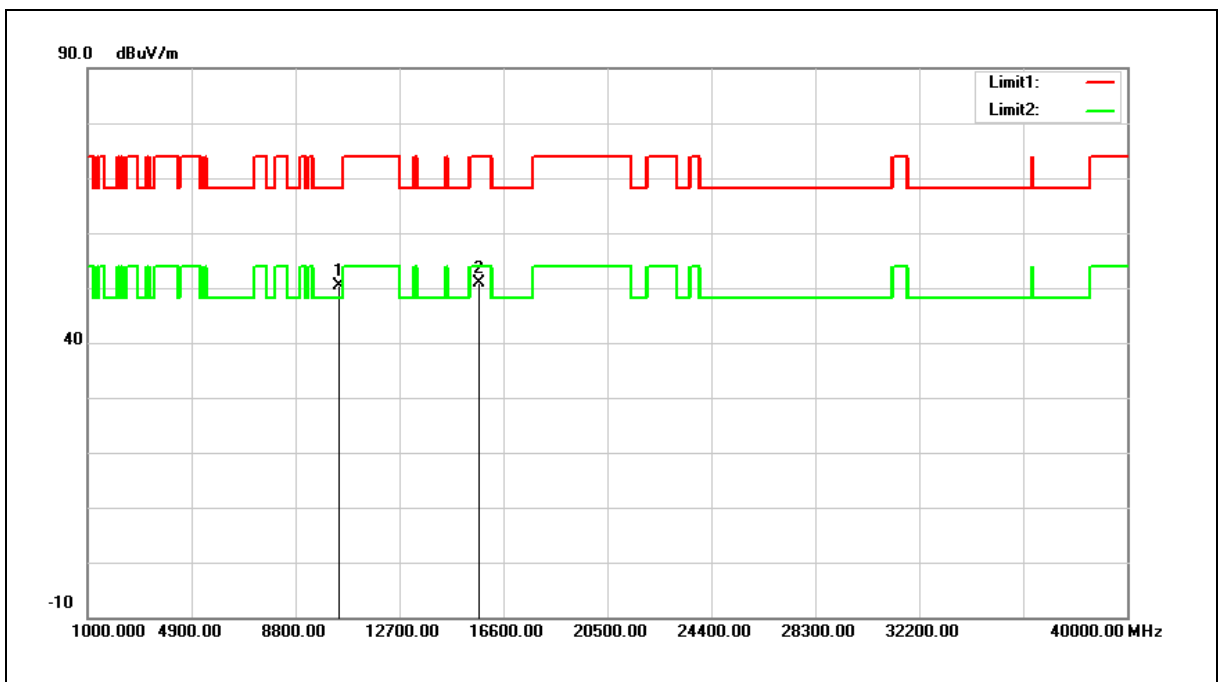


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10460.000	33.20	17.27	50.47	68.20	-17.73	peak
2	15690.000	32.16	18.78	50.94	74.00	-23.06	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 110 V/60 Hz
Frequency:	5230 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 10		
Ant.Polar.:	Vertical		

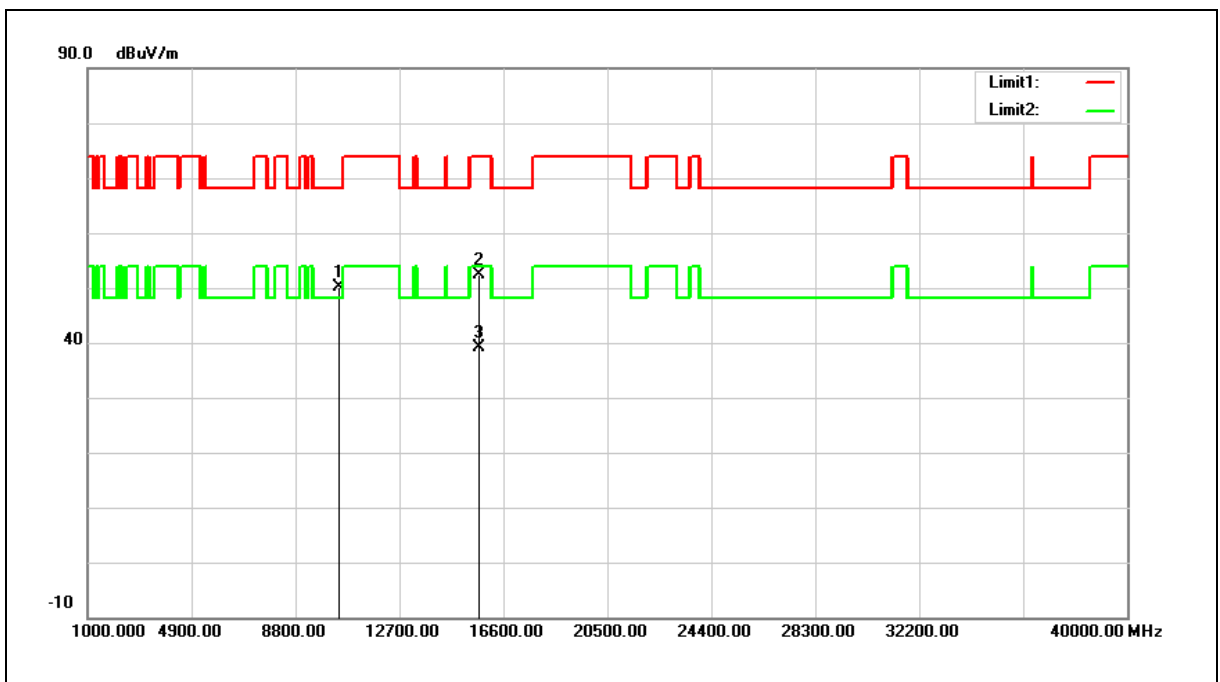


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10460.000	32.96	17.27	50.23	68.20	-17.97	peak
2	15690.000	33.48	18.78	52.26	74.00	-21.74	peak
3	15690.000	20.32	18.78	39.10	54.00	-14.90	AVG

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 110 V/60 Hz
Frequency:	5270 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 10		
Ant.Polar.:	Horizontal		

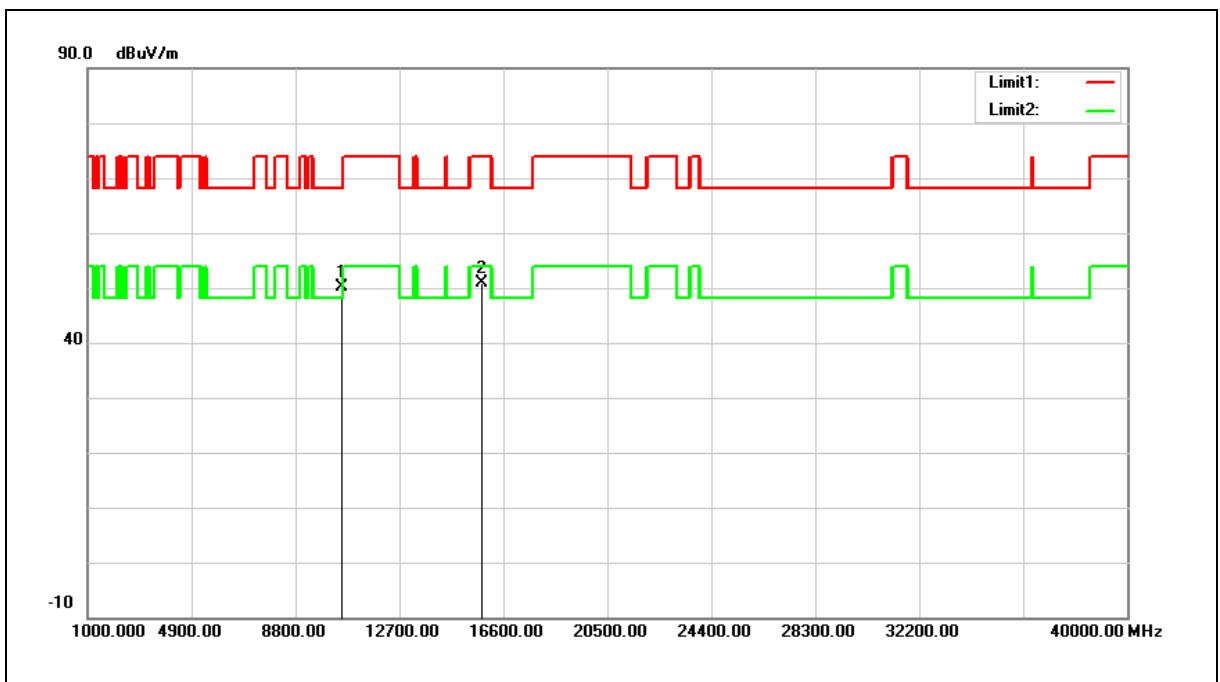


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10540.000	32.51	17.52	50.03	68.20	-18.17	peak
2	15810.000	32.48	18.47	50.95	74.00	-23.05	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 110 V/60 Hz
Frequency:	5270 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 10		
Ant.Polar.:	Vertical		

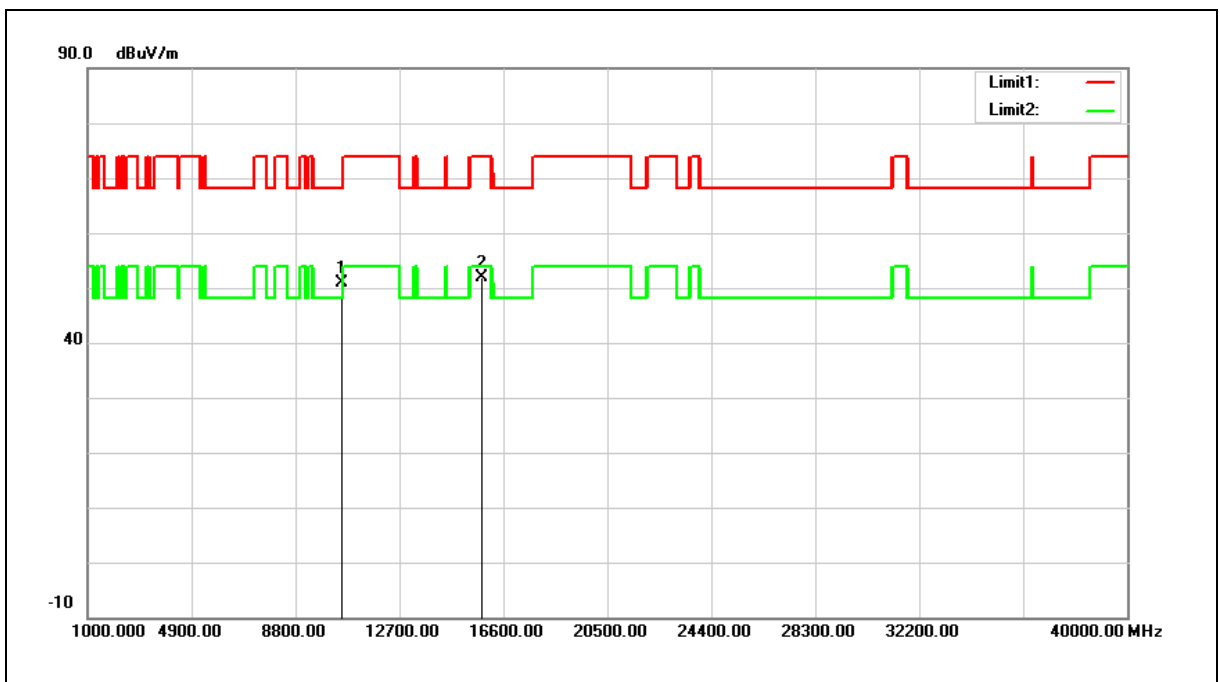


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10540.000	33.48	17.52	51.00	68.20	-17.20	peak
2	15810.000	33.29	18.47	51.76	74.00	-22.24	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 110 V/60 Hz
Frequency:	5310 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 10		
Ant.Polar.:	Horizontal		

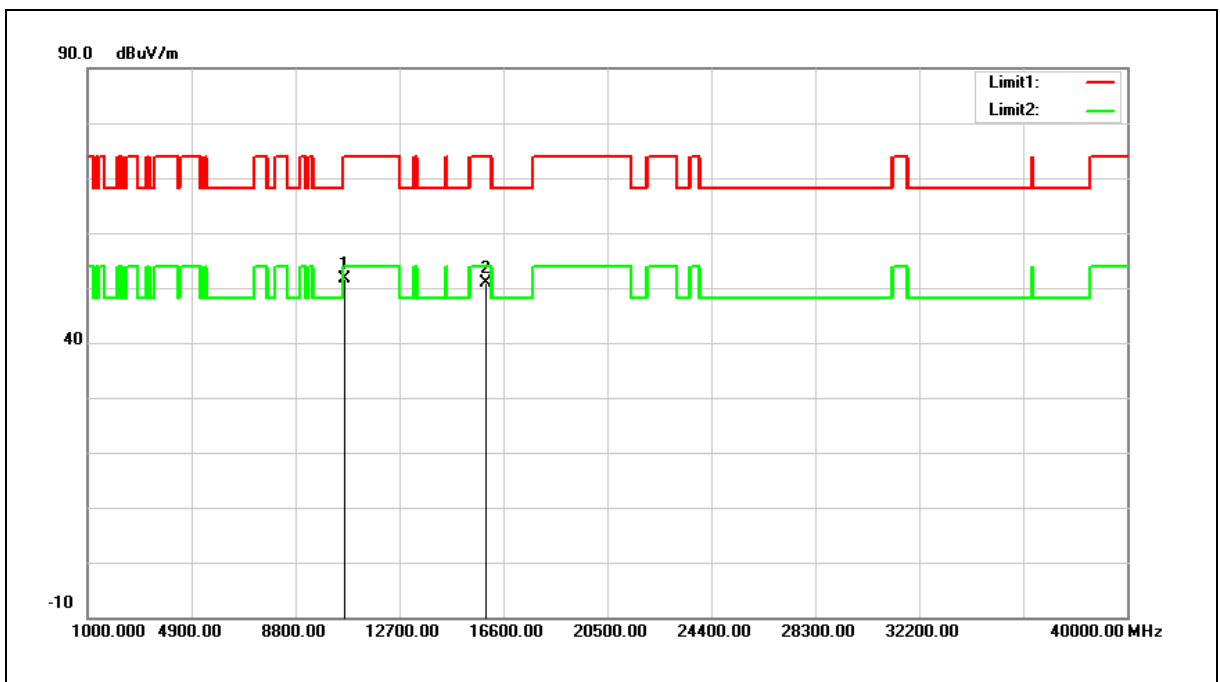


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10620.000	33.93	17.70	51.63	74.00	-22.37	peak
2	15930.000	32.84	18.14	50.98	74.00	-23.02	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 110 V/60 Hz
Frequency:	5310 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 10		
Ant.Polar.:	Vertical		

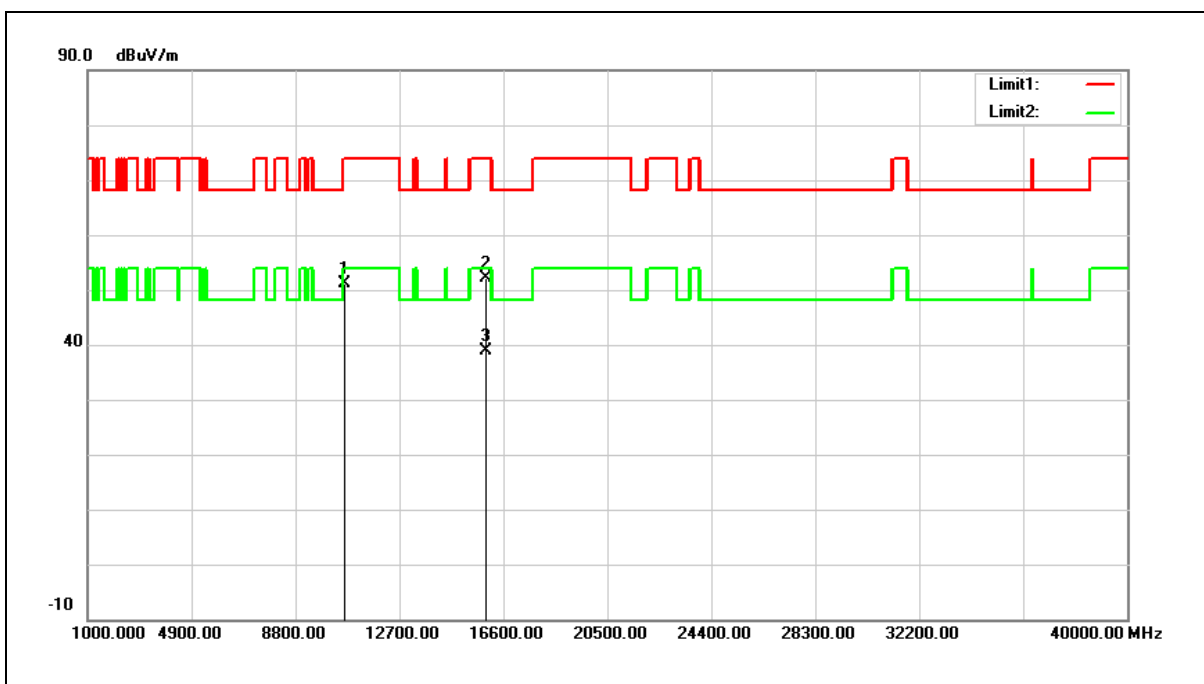


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10620.000	33.44	17.70	51.14	74.00	-22.86	peak
2	15930.000	33.99	18.14	52.13	74.00	-21.87	peak
3	15930.000	20.78	18.14	38.92	54.00	-15.08	AVG

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 110 V/60 Hz
Frequency:	5510 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 10		
Ant.Polar.:	Horizontal		

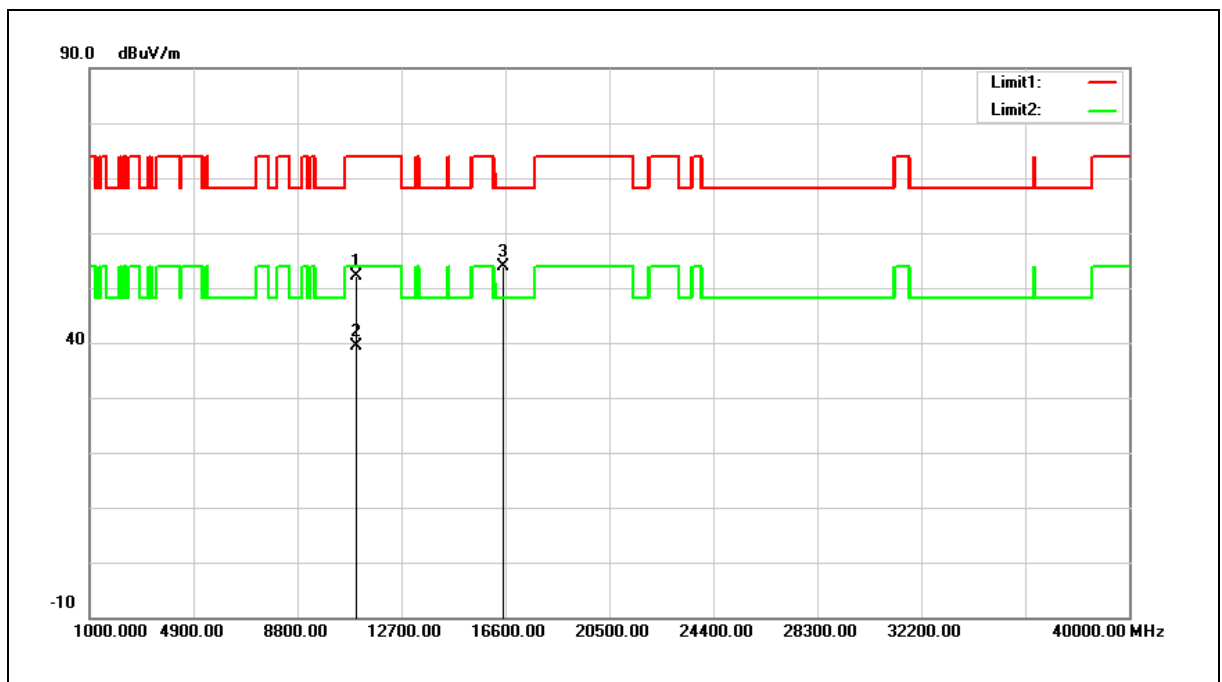


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11020.000	33.68	18.55	52.23	74.00	-21.77	peak
2	11020.000	20.88	18.55	39.43	54.00	-14.57	AVG
3	16530.000	32.94	20.93	53.87	68.20	-14.33	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 110 V/60 Hz
Frequency:	5510 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 10		
Ant.Polar.:	Vertical		

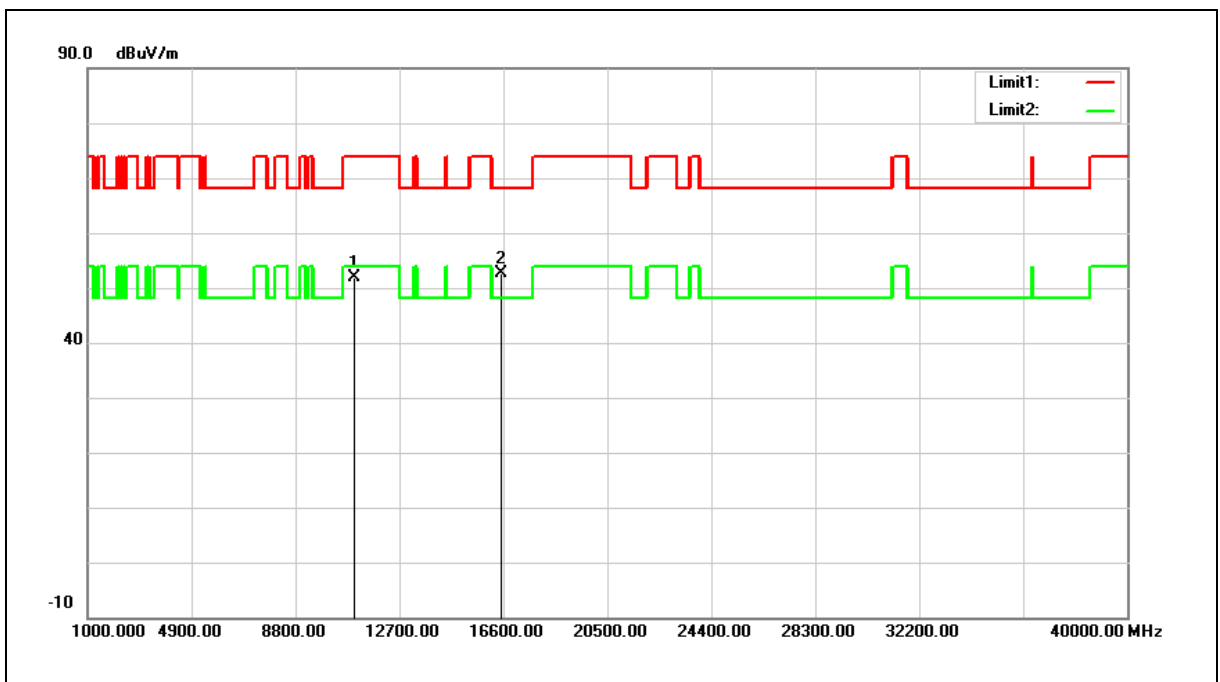


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11020.000	33.37	18.55	51.92	74.00	-22.08	peak
2	16530.000	31.79	20.93	52.72	68.20	-15.48	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 110 V/60 Hz
Frequency:	5550 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 10		
Ant.Polar.:	Horizontal		

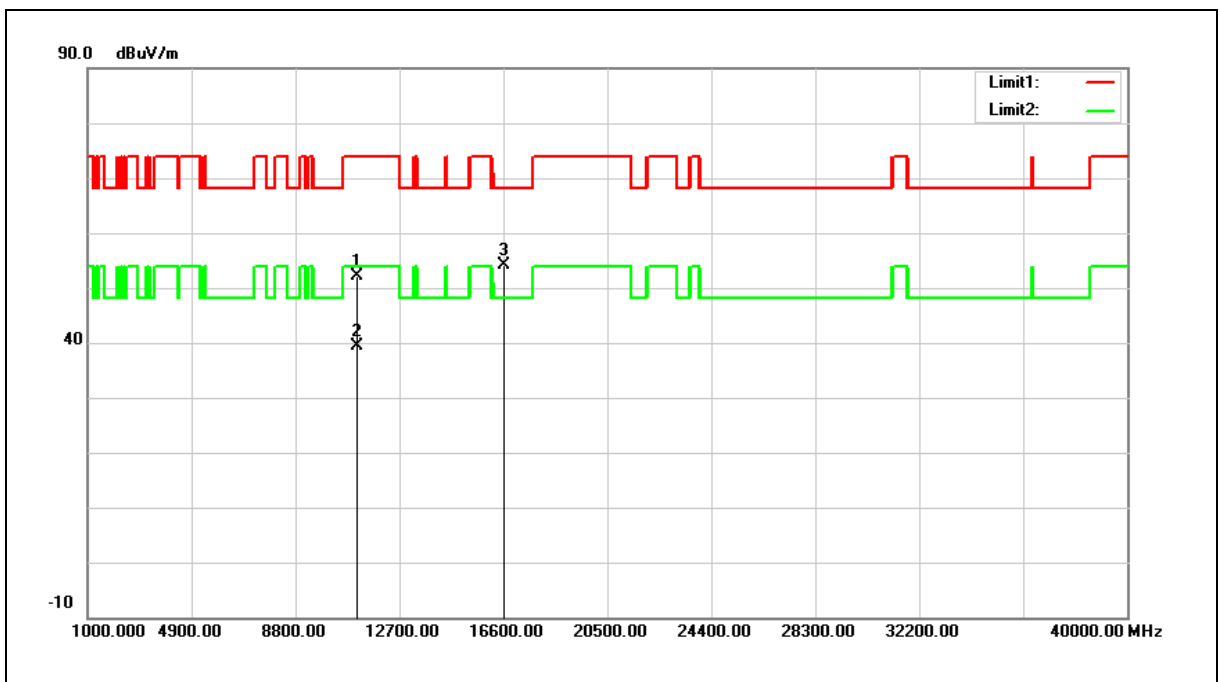


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11100.000	33.66	18.54	52.20	74.00	-21.80	peak
2	11100.000	20.85	18.54	39.39	54.00	-14.61	AVG
3	16650.000	32.46	21.56	54.02	68.20	-14.18	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 110 V/60 Hz
Frequency:	5550 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 10		
Ant.Polar.:	Vertical		

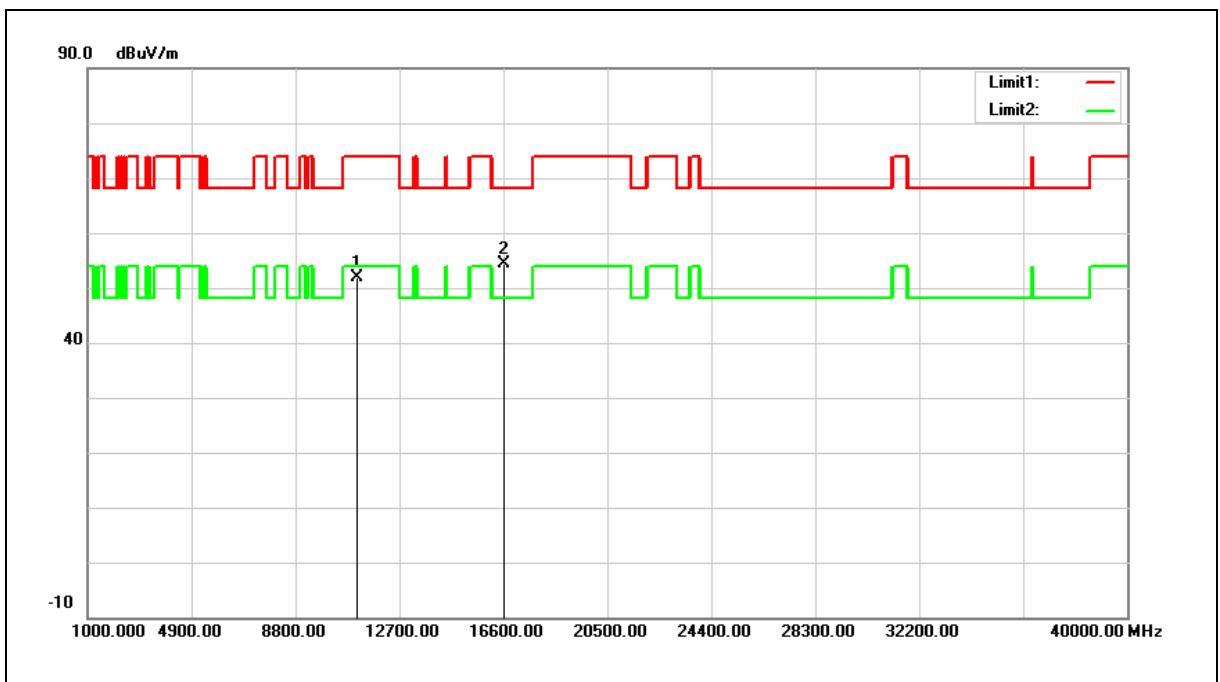


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11100.000	33.45	18.54	51.99	74.00	-22.01	peak
2	16650.000	32.77	21.56	54.33	68.20	-13.87	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 110 V/60 Hz
Frequency:	5670 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 10		
Ant.Polar.:	Horizontal		

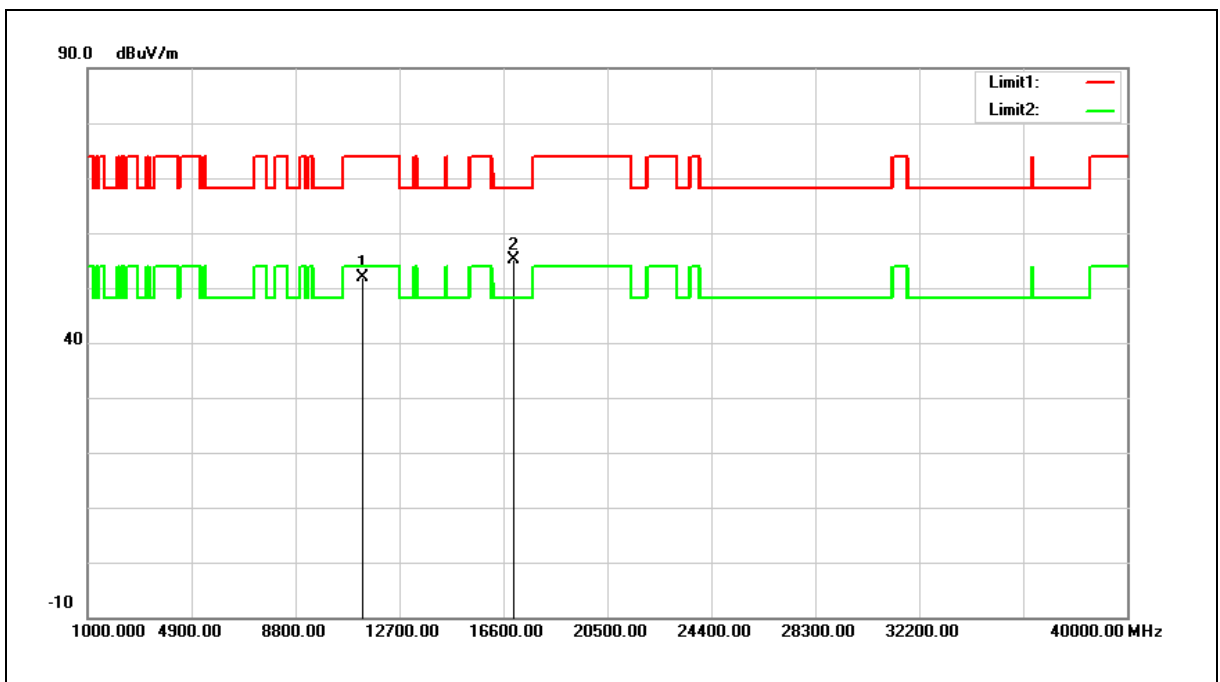


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11340.000	33.40	18.51	51.91	74.00	-22.09	peak
2	17010.000	31.59	23.44	55.03	68.20	-13.17	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 110 V/60 Hz
Frequency:	5670 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 10		
Ant.Polar.:	Vertical		

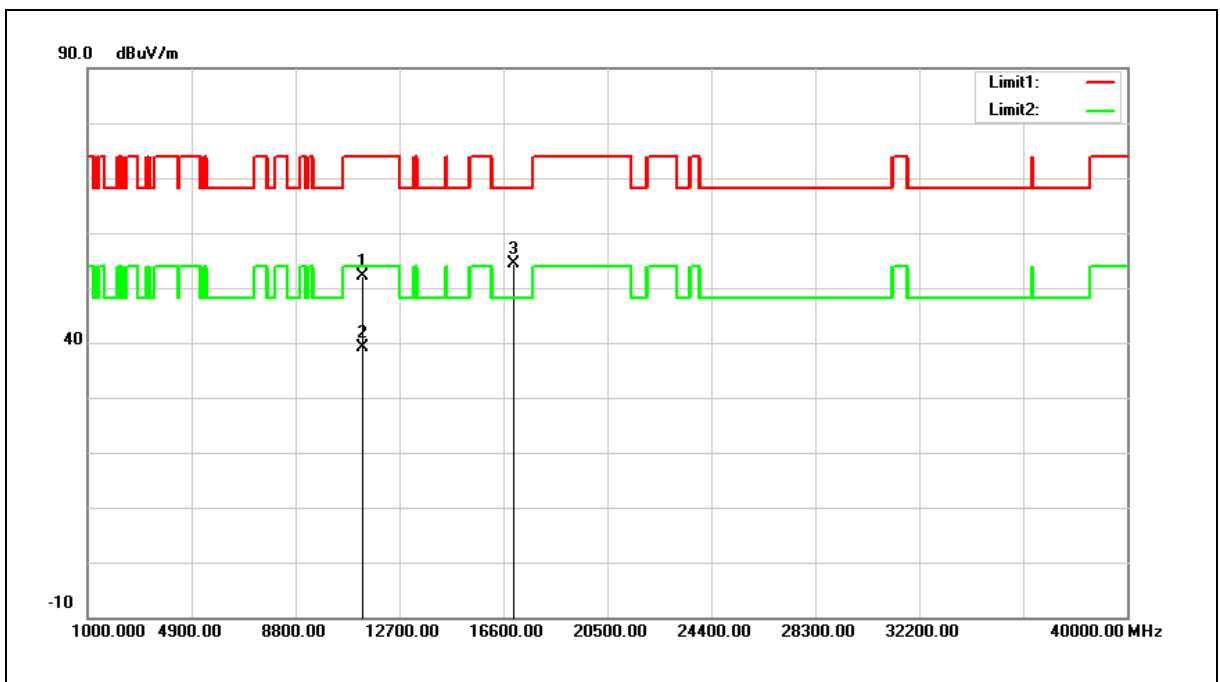


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11340.000	33.65	18.51	52.16	74.00	-21.84	peak
2	11340.000	20.63	18.51	39.14	54.00	-14.86	AVG
3	17010.000	30.97	23.44	54.41	68.20	-13.79	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 110 V/60 Hz
Frequency:	5755 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 10		
Ant.Polar.:	Horizontal		

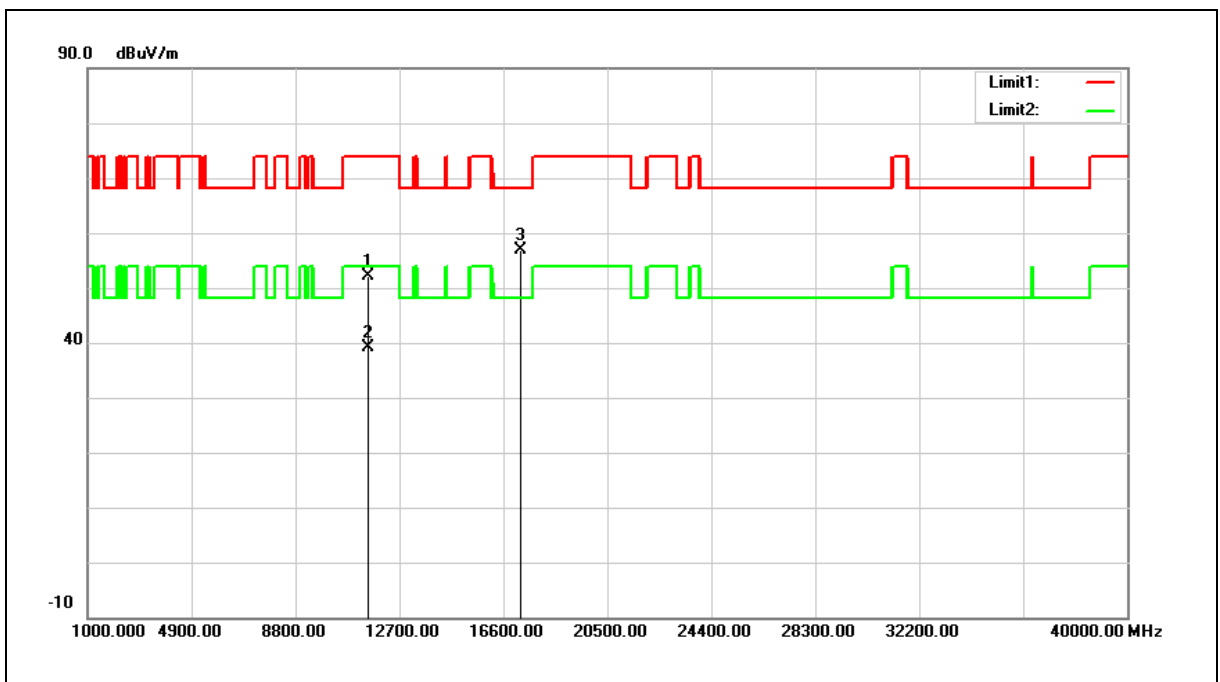


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11510.000	33.67	18.49	52.16	74.00	-21.84	peak
2	11510.000	20.71	18.49	39.20	54.00	-14.80	AVG
3	17265.000	32.45	24.44	56.89	68.20	-11.31	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 110 V/60 Hz
Frequency:	5755 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 10		
Ant.Polar.:	Vertical		

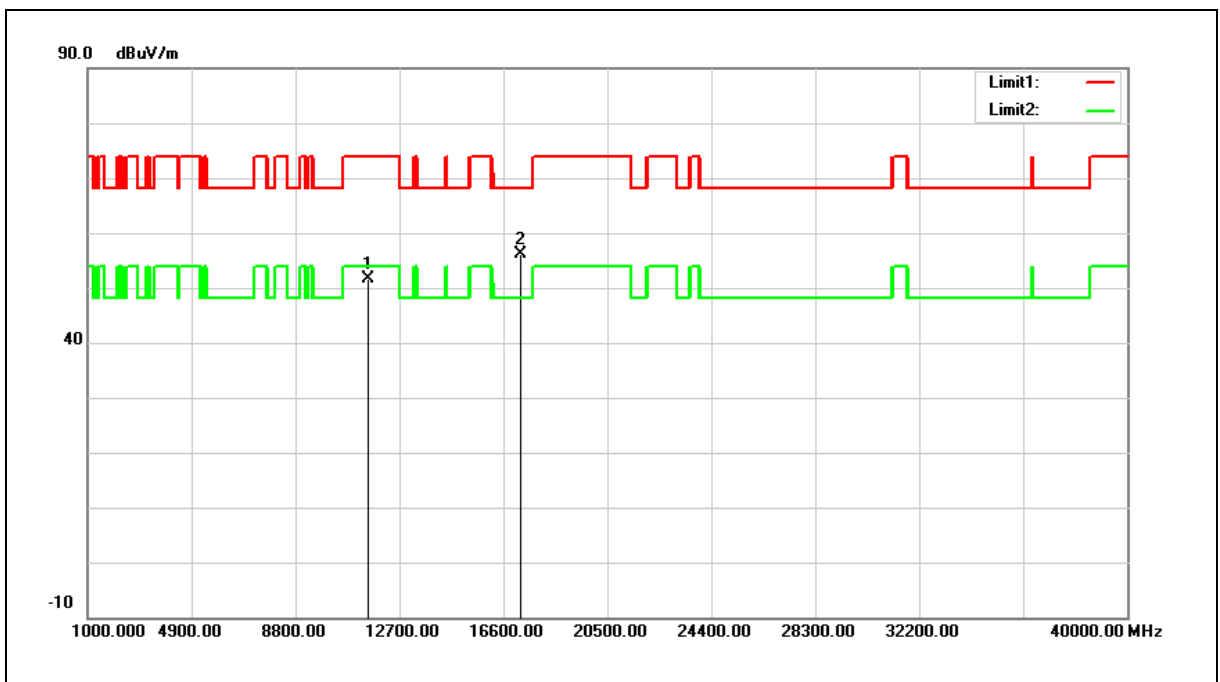


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11510.000	33.12	18.49	51.61	74.00	-22.39	peak
2	17265.000	31.77	24.44	56.21	68.20	-11.99	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 110 V/60 Hz
Frequency:	5795 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 10		
Ant.Polar.:	Horizontal		

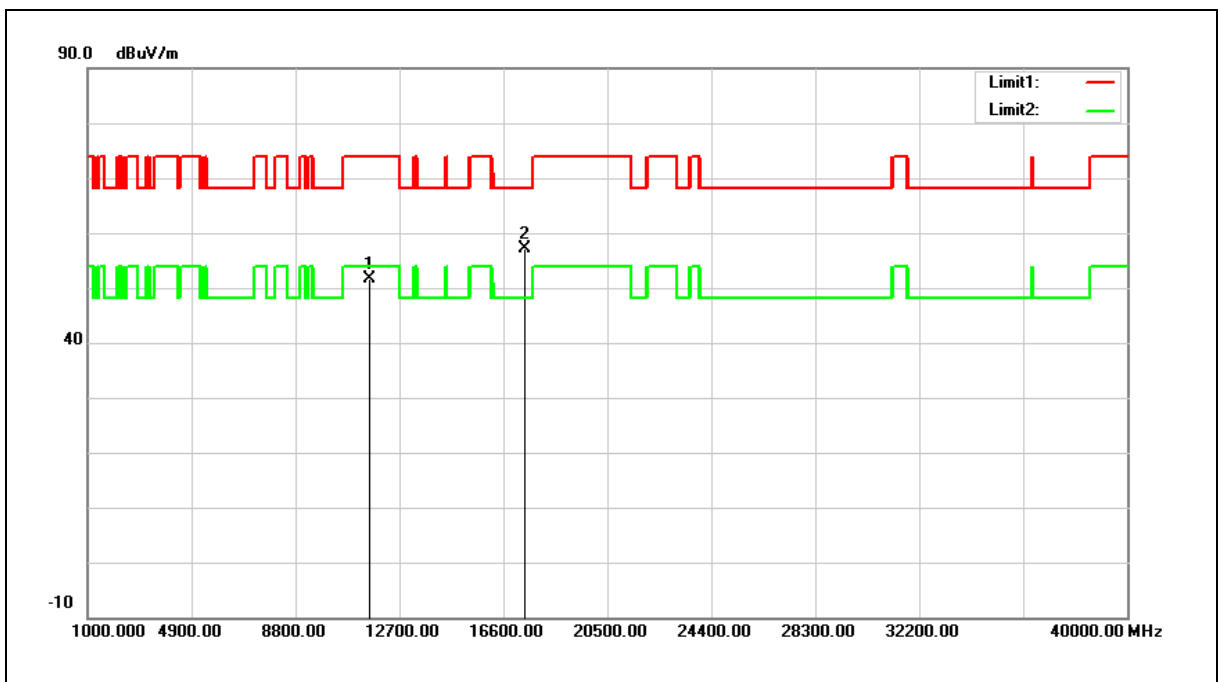


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11590.000	33.22	18.43	51.65	74.00	-22.35	peak
2	17385.000	32.12	24.90	57.02	68.20	-11.18	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 110 V/60 Hz
Frequency:	5795 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 10		
Ant.Polar.:	Vertical		

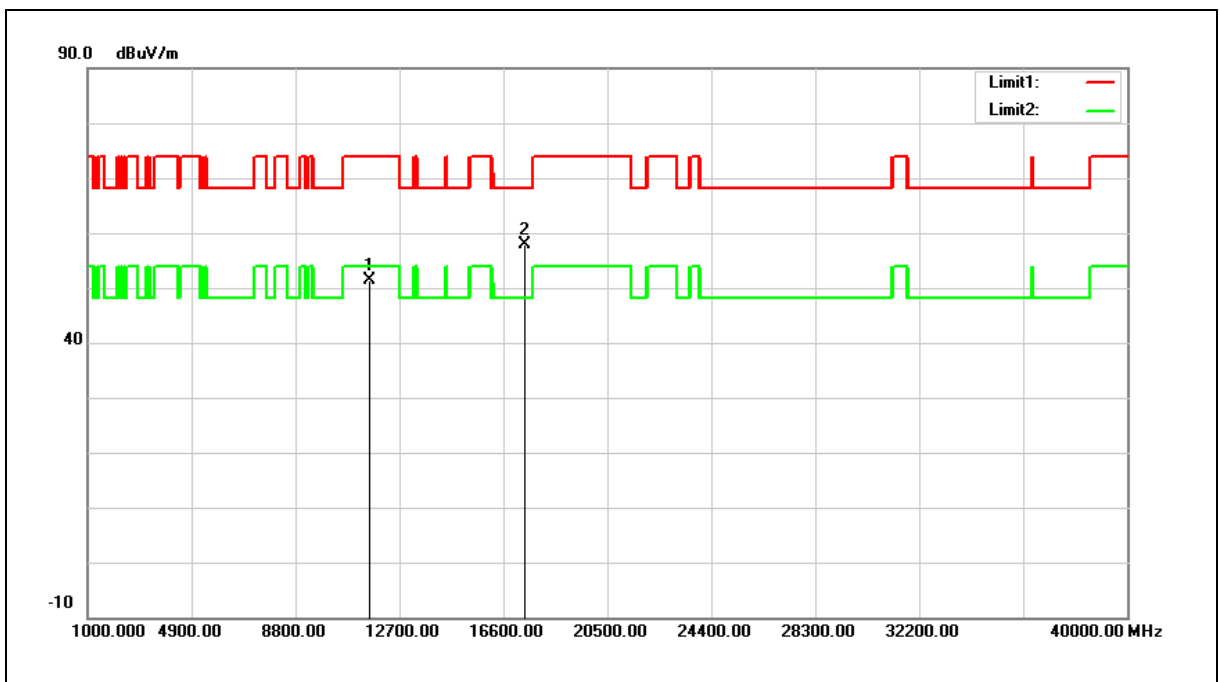


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11590.000	32.99	18.43	51.42	74.00	-22.58	peak
2	17385.000	33.01	24.90	57.91	68.20	-10.29	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 110 V/60 Hz
Frequency:	5210 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 11		
Ant.Polar.:	Horizontal		

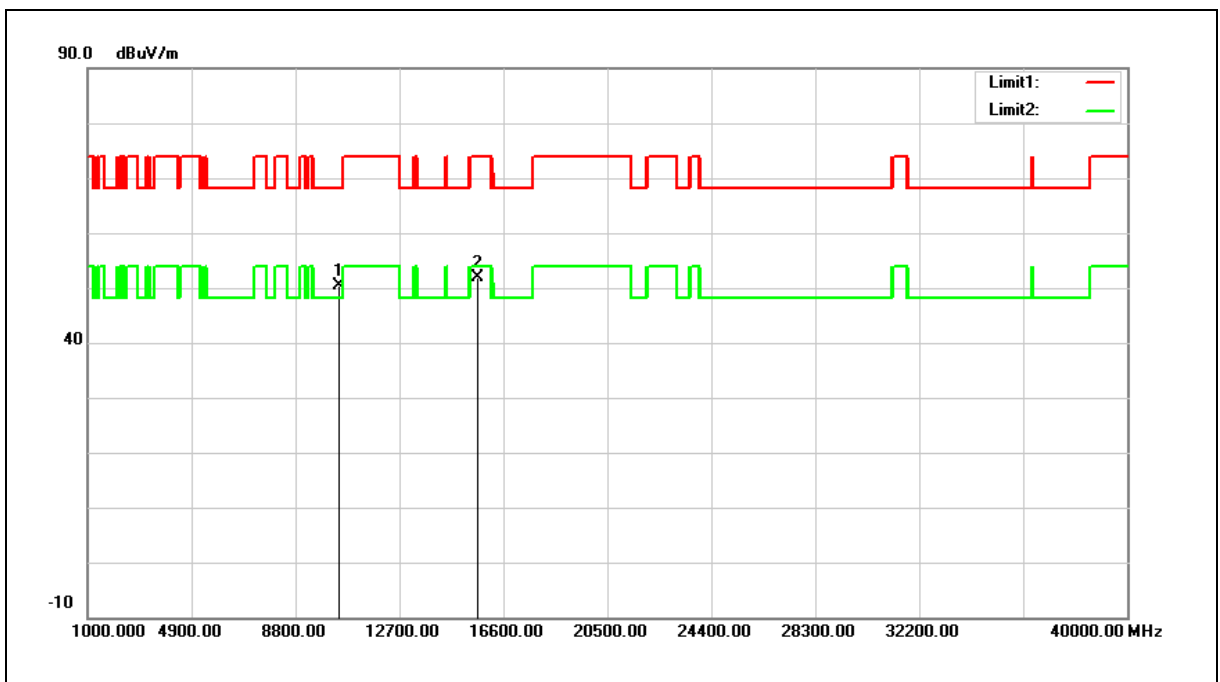


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10420.000	33.32	17.13	50.45	68.20	-17.75	peak
2	15630.000	33.01	18.94	51.95	74.00	-22.05	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 110 V/60 Hz
Frequency:	5210 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 11		
Ant.Polar.:	Vertical		

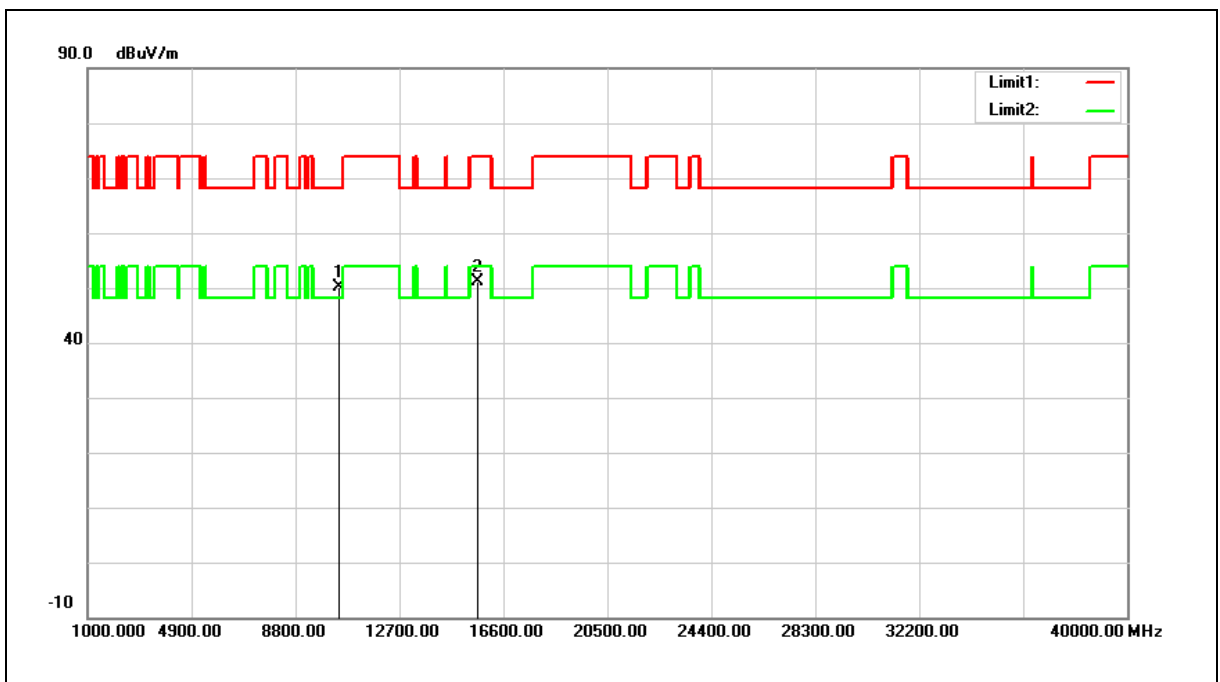


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10420.000	33.12	17.13	50.25	68.20	-17.95	peak
2	15630.000	32.08	18.94	51.02	74.00	-22.98	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 110 V/60 Hz
Frequency:	5290 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 11		
Ant.Polar.:	Horizontal		

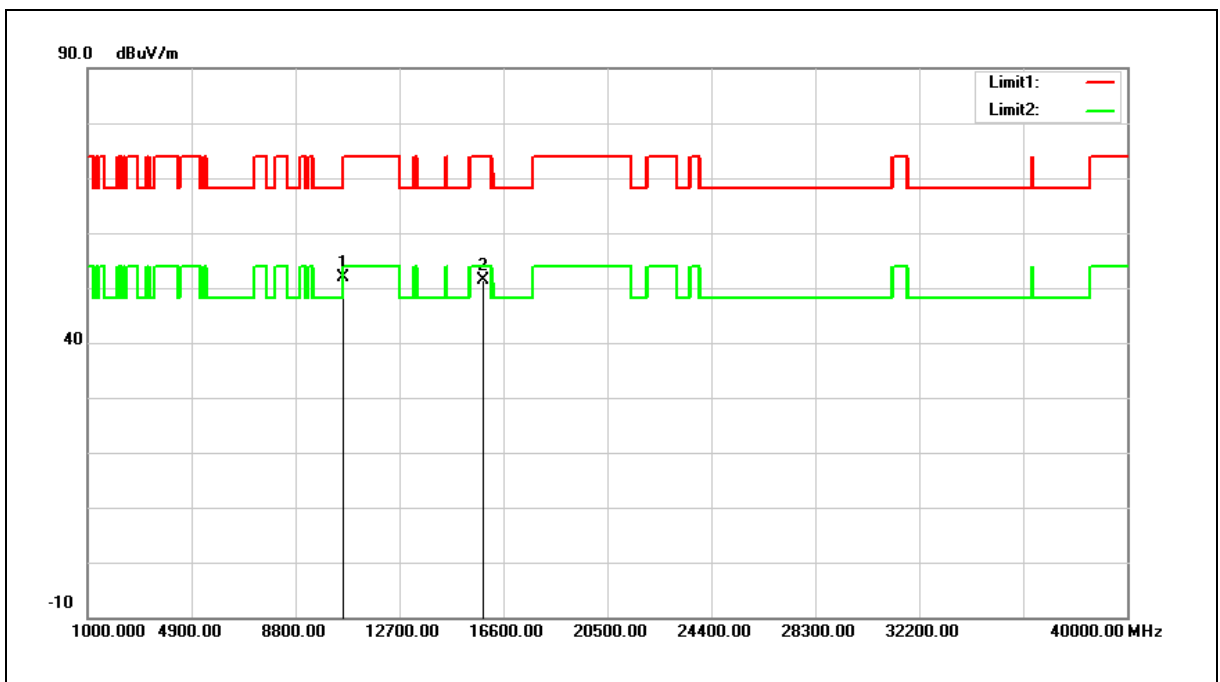


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10580.000	34.24	17.61	51.85	68.20	-16.35	peak
2	15870.000	32.95	18.31	51.26	74.00	-22.74	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 110 V/60 Hz
Frequency:	5290 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 11		
Ant.Polar.:	Vertical		

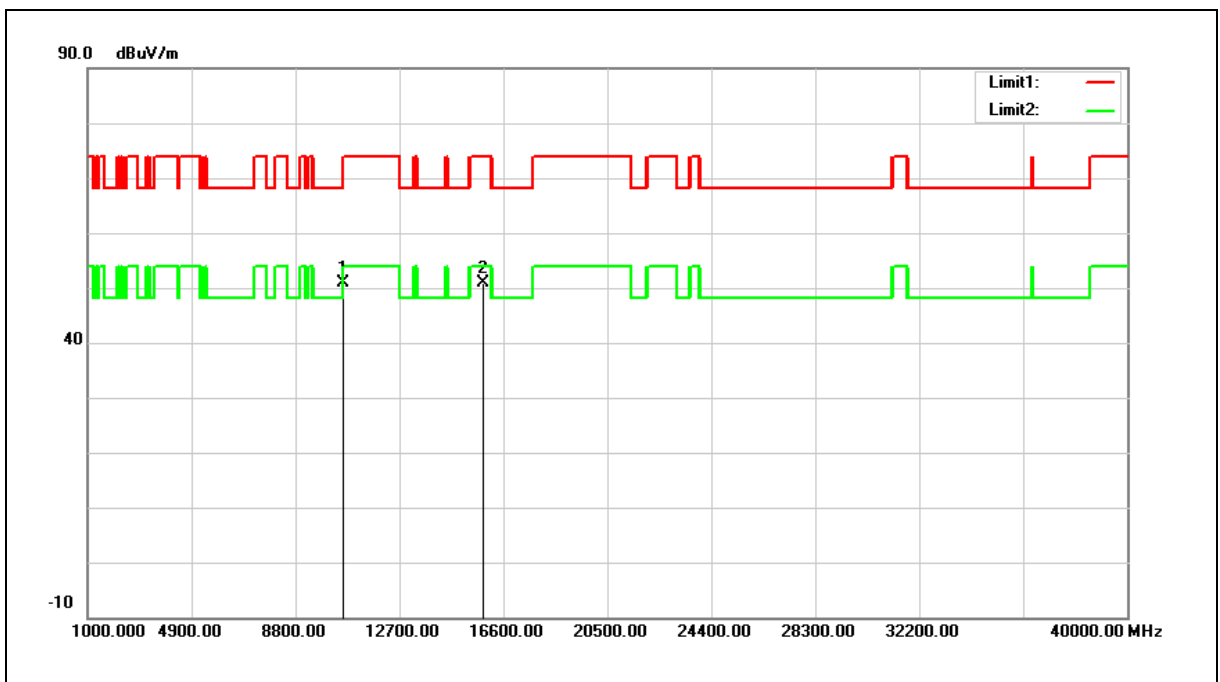


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10580.000	33.28	17.61	50.89	68.20	-17.31	peak
2	15870.000	32.63	18.31	50.94	74.00	-23.06	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 110 V/60 Hz
Frequency:	5530 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 11		
Ant.Polar.:	Horizontal		

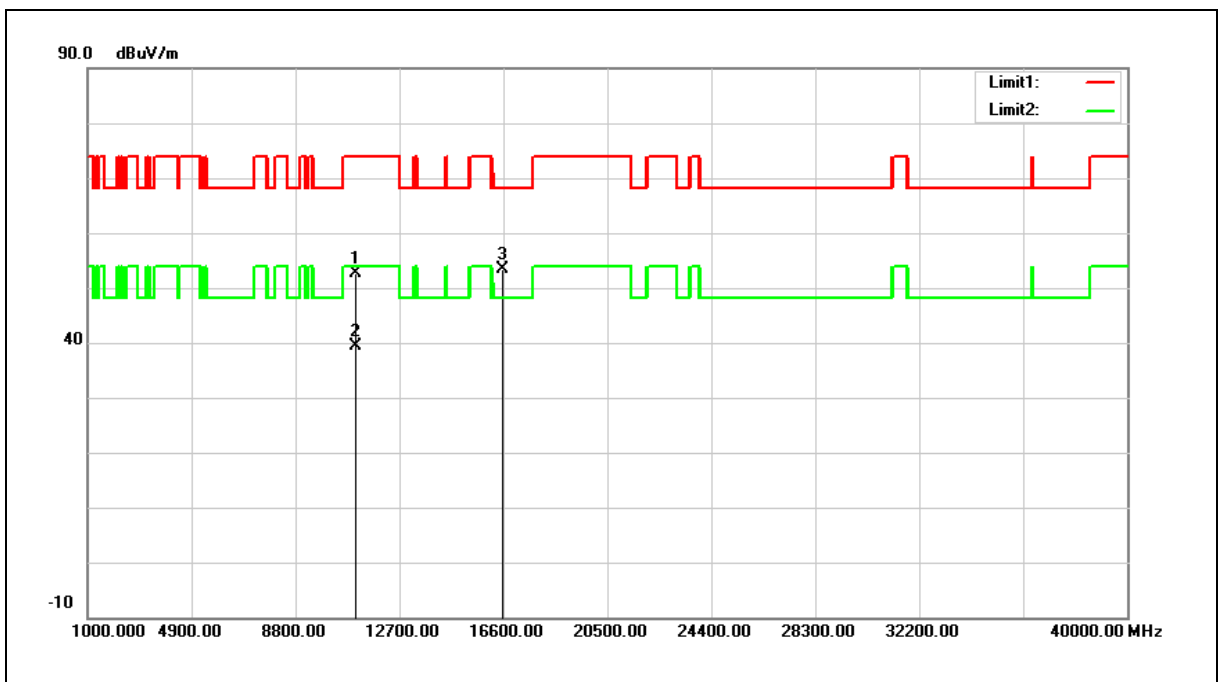


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11060.000	34.19	18.54	52.73	74.00	-21.27	peak
2	11060.000	20.84	18.54	39.38	54.00	-14.62	AVG
3	16590.000	32.09	21.25	53.34	68.20	-14.86	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 110 V/60 Hz
Frequency:	5530 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 11		
Ant.Polar.:	Vertical		

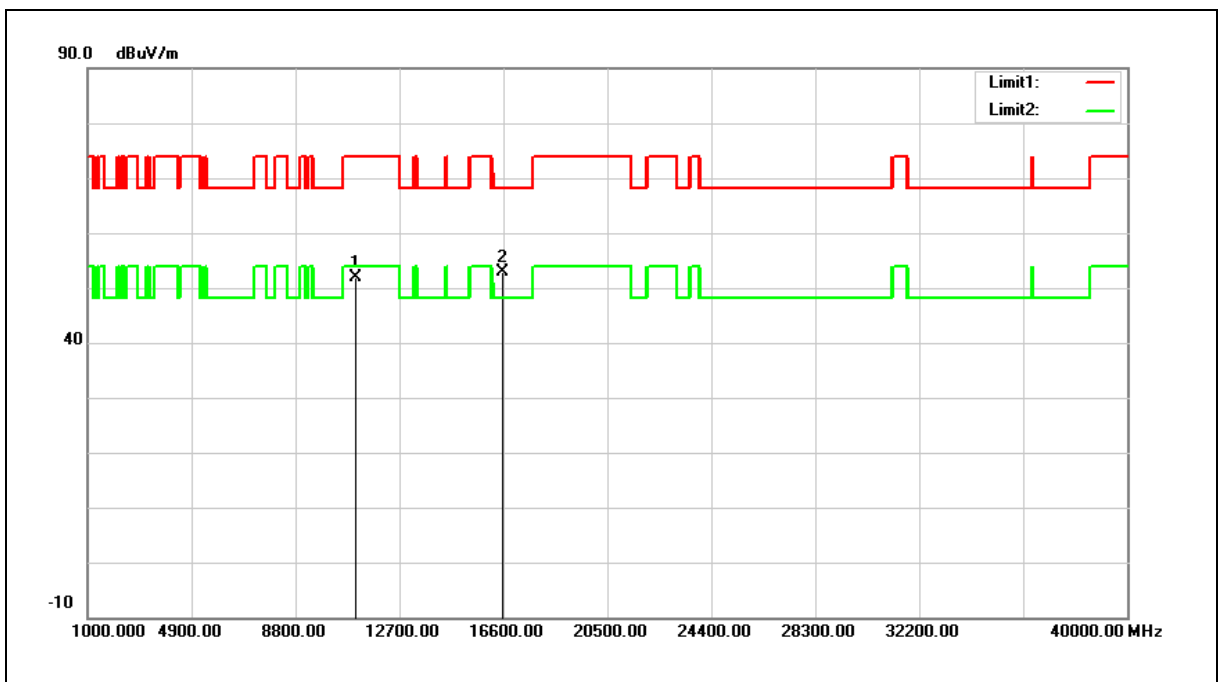


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11060.000	33.46	18.54	52.00	74.00	-22.00	peak
2	16590.000	31.67	21.25	52.92	68.20	-15.28	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 110 V/60 Hz
Frequency:	5775 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 11		
Ant.Polar.:	Horizontal		

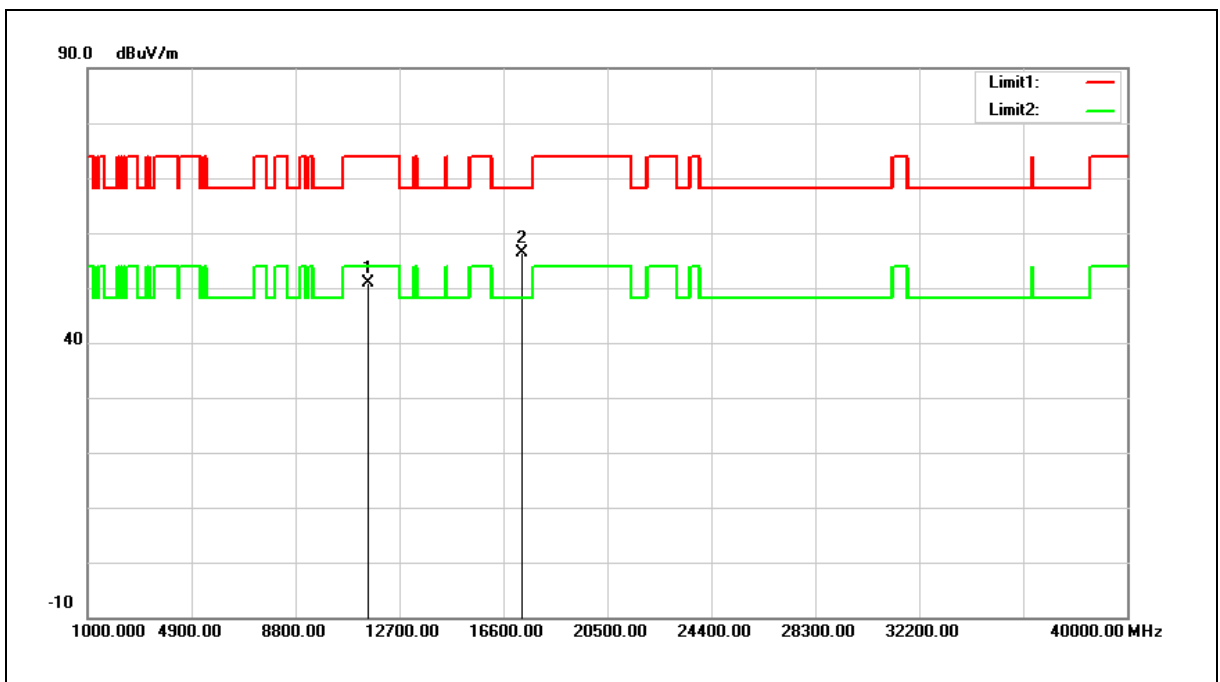


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11550.000	32.37	18.46	50.83	74.00	-23.17	peak
2	17325.000	31.80	24.68	56.48	68.20	-11.72	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 110 V/60 Hz
Frequency:	5775 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 11		
Ant.Polar.:	Vertical		

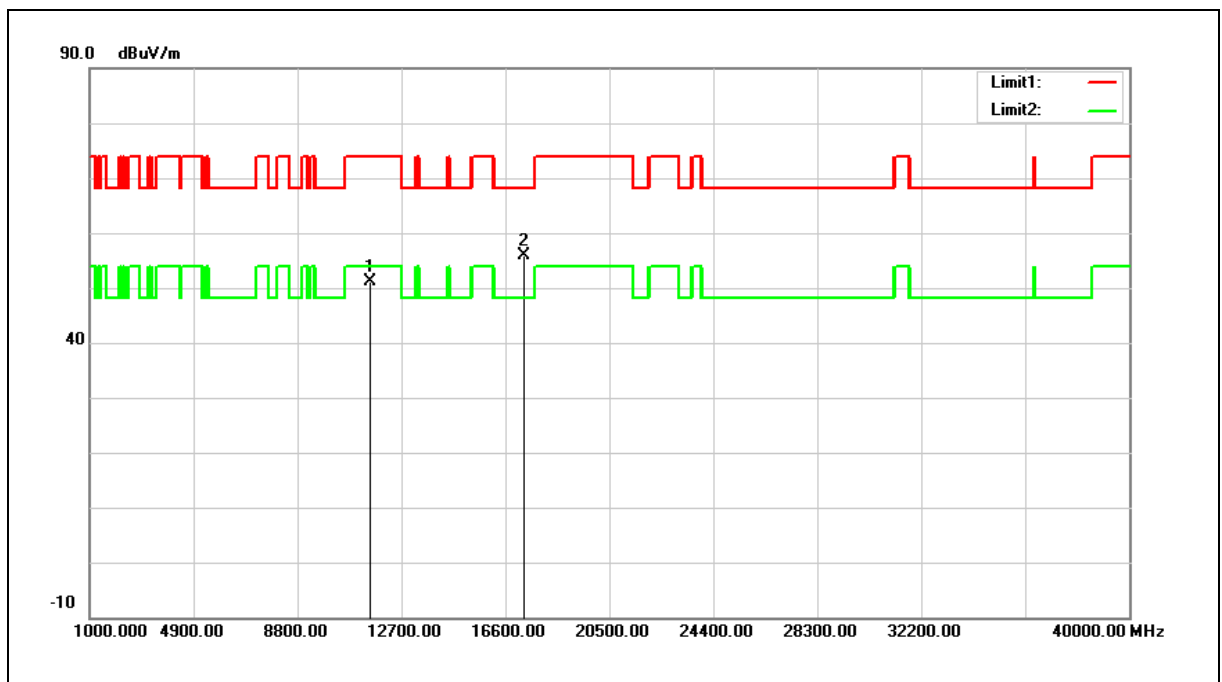


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11550.000	32.70	18.46	51.16	74.00	-22.84	peak
2	17325.000	31.27	24.68	55.95	68.20	-12.25	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 110 V/60 Hz
Frequency:	5250 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 12		
Ant.Polar.:	Horizontal		

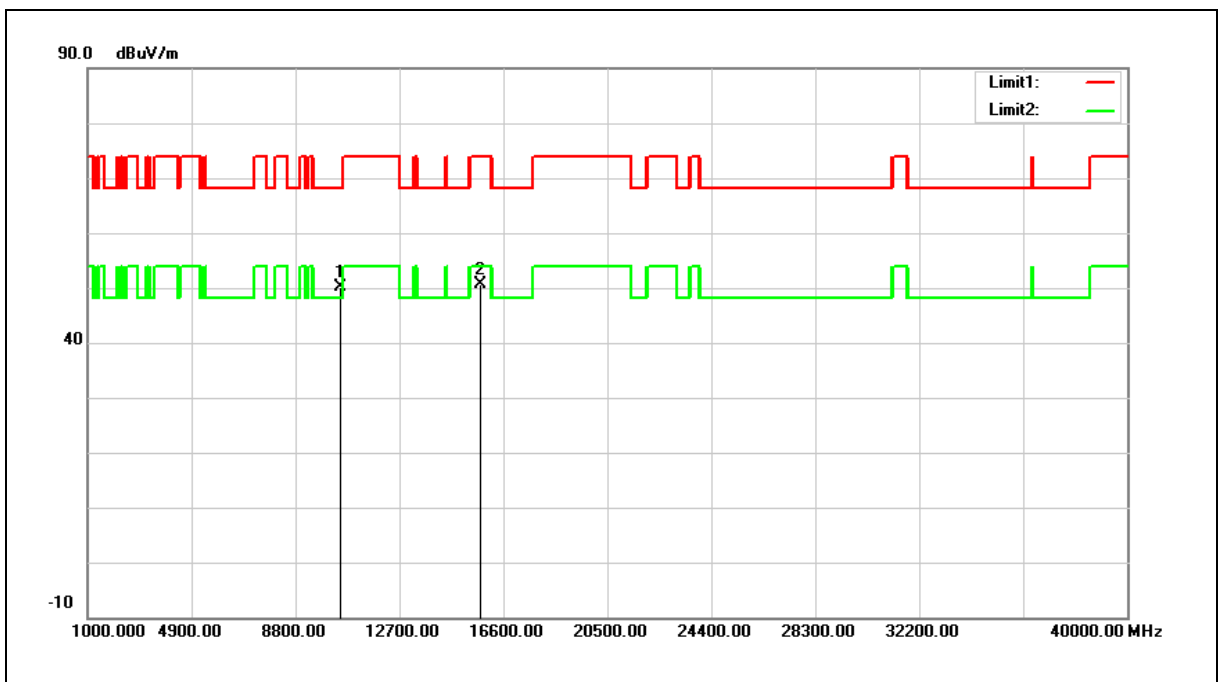


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10500.000	32.73	17.43	50.16	68.20	-18.04	peak
2	15750.000	32.00	18.63	50.63	74.00	-23.37	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 110 V/60 Hz
Frequency:	5250 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 12		
Ant.Polar.:	Vertical		

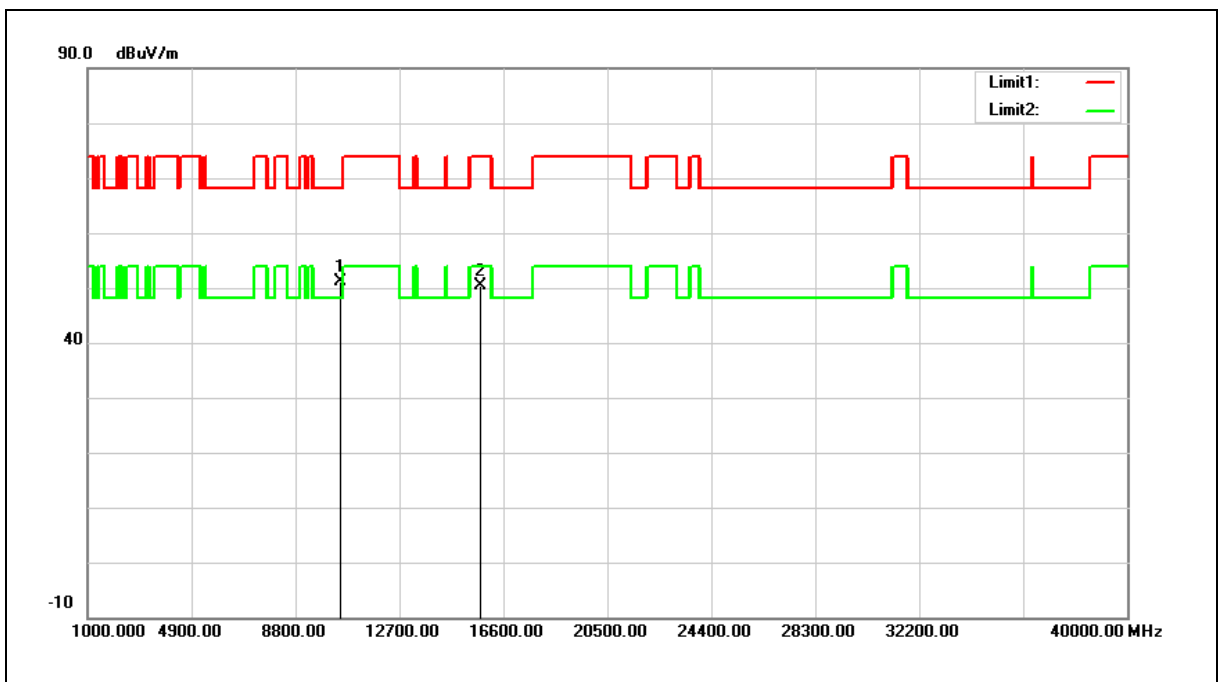


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10500.000	33.69	17.43	51.12	68.20	-17.08	peak
2	15750.000	31.81	18.63	50.44	74.00	-23.56	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 110 V/60 Hz
Test Mode:	Simultaneous Transmitting (2.4+5 GHz WLAN+BT)	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Ant.Polar.:	Horizontal		

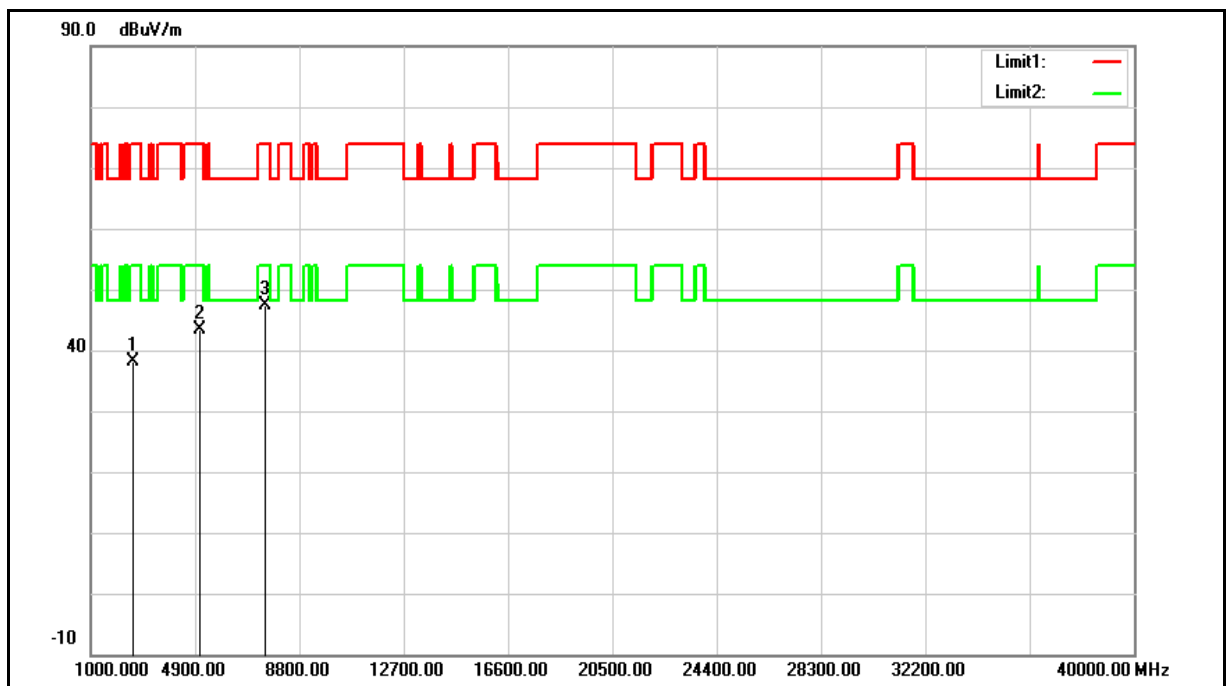


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2581.000	38.64	-0.39	38.25	74.00	-35.75	peak
2	5080.000	37.20	6.09	43.29	74.00	-30.71	peak
3	7511.000	34.73	12.63	47.36	74.00	-26.64	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 110 V/60 Hz
Test Mode:	Simultaneous Transmitting (2.4+5 GHz WLAN+BT)	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Ant.Polar.:	Vertical		

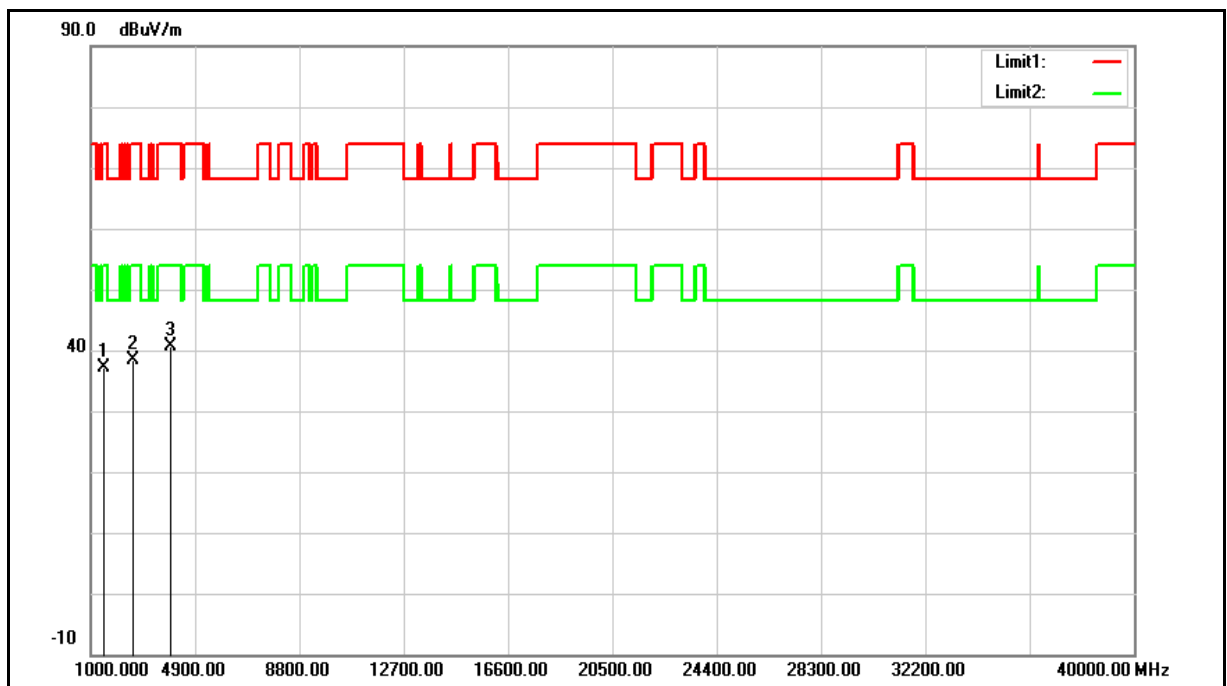


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1442.000	41.89	-4.75	37.14	74.00	-36.86	peak
2	2530.000	39.02	-0.54	38.48	74.00	-35.52	peak
3	3992.000	37.37	3.19	40.56	74.00	-33.44	peak

Note: 1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 110 V/60 Hz
Frequency:	5180 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 13		
Ant.Polar.:	Horizontal		

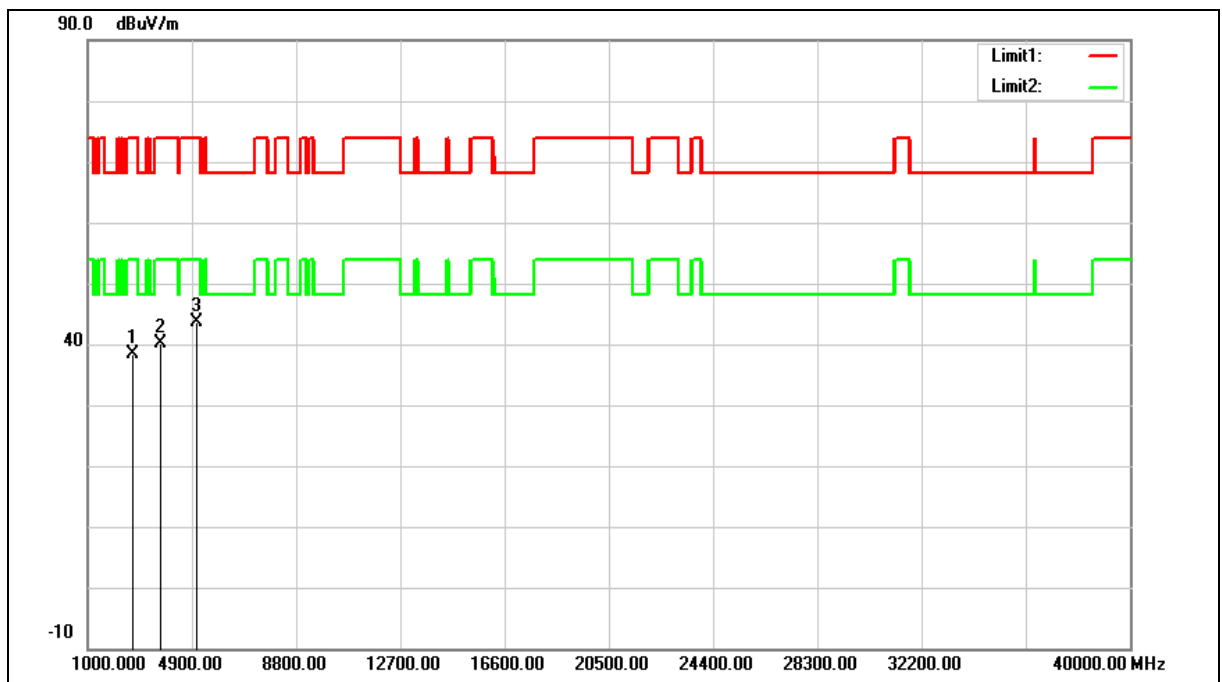


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2666.000	38.39	-0.12	38.27	74.00	-35.73	peak
2	3703.000	37.74	2.37	40.11	74.00	-33.89	peak
3	5029.000	37.68	5.98	43.66	74.00	-30.34	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 110 V/60 Hz
Frequency:	5180 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 13		
Ant.Polar.:	Vertical		

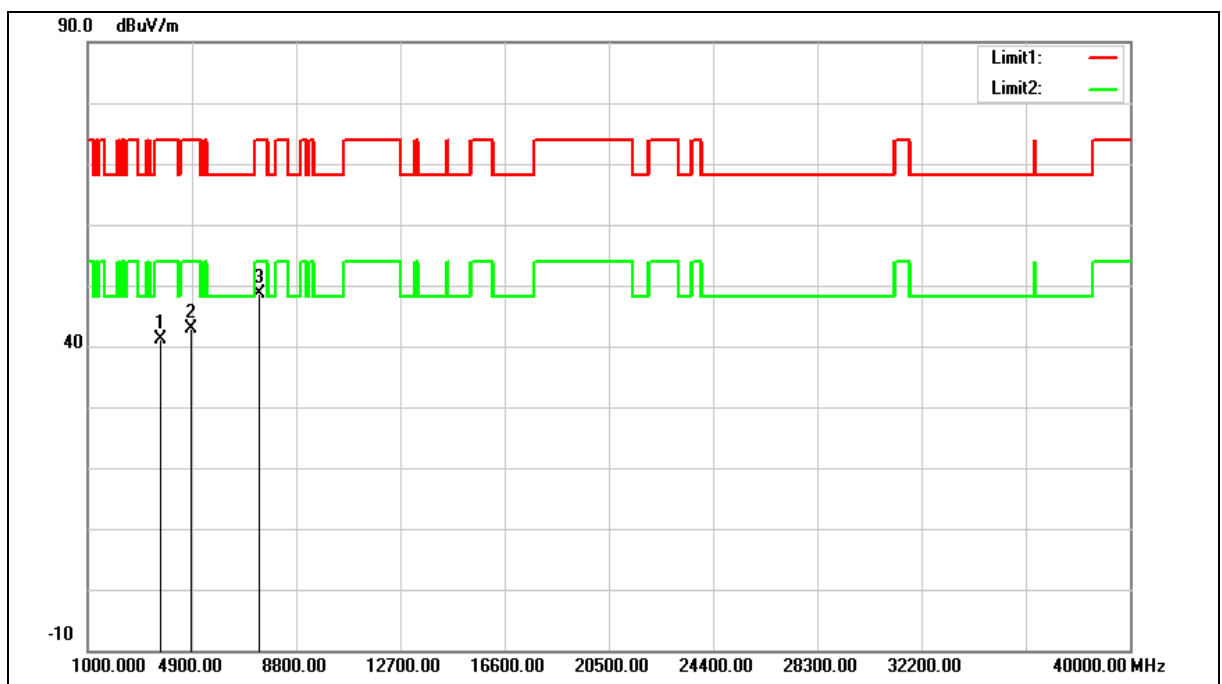

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	3737.000	38.66	2.47	41.13	74.00	-32.87	peak
2	4859.000	37.34	5.64	42.98	74.00	-31.02	peak
3	7358.000	36.26	12.26	48.52	74.00	-25.48	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).


2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

頻帶邊緣

附註: 其上下邊緣落於低功率射頻電機第 2.7 節所列頻帶內之混附發射, 其電場強度必須符合第 2.8 節的限制規定。

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5180 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 6		
Ant.Polar.:	Horizontal		

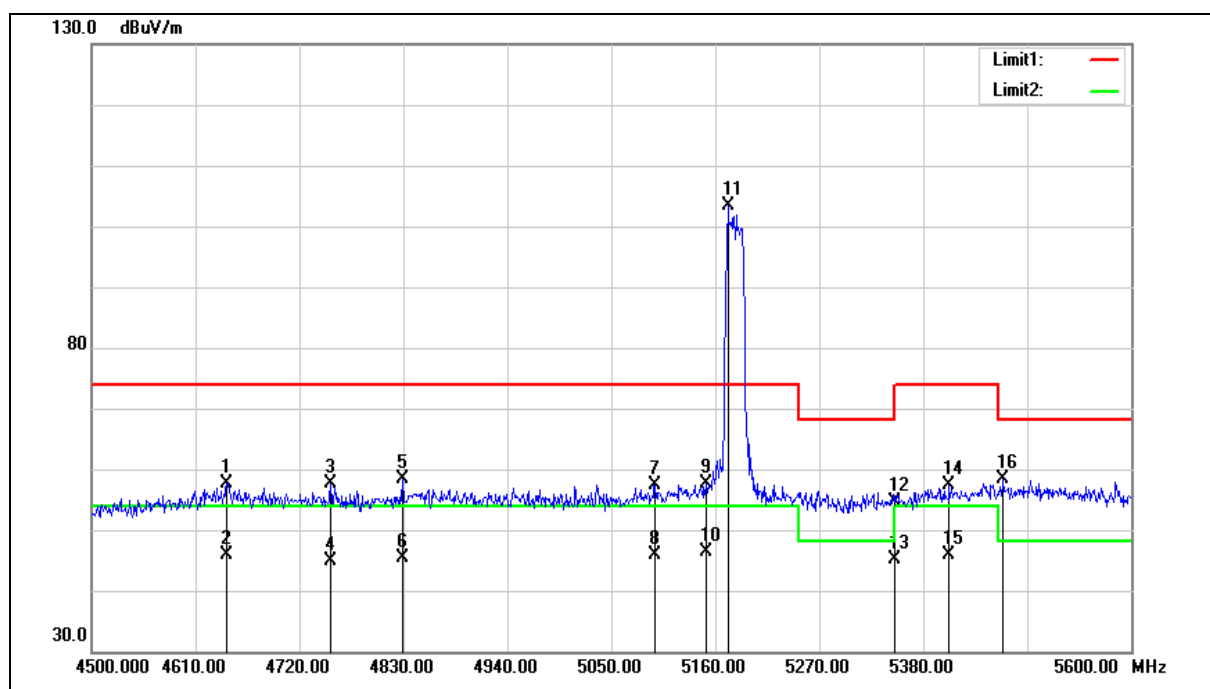

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5180 MHz	Temp.(°C)/Hum. (%RH):	26(°C)/60 %RH
Mode:	Mode 6		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4643.000	52.35	5.24	57.59	74.00	-16.41	peak
2	4643.000	40.72	5.24	45.96	54.00	-8.04	AVG
3	4753.000	52.08	5.44	57.52	74.00	-16.48	peak
4	4753.000	39.41	5.44	44.85	54.00	-9.15	AVG
5	4828.900	52.91	5.58	58.49	74.00	-15.51	peak
6	4828.900	39.73	5.58	45.31	54.00	-8.69	AVG
7	5096.200	51.35	6.14	57.49	74.00	-16.51	peak
8	5096.200	39.62	6.14	45.76	54.00	-8.24	AVG
9	5150.000	51.38	6.27	57.65	74.00	-16.35	peak
10	5150.000	40.20	6.27	46.47	54.00	-7.53	AVG
11	5173.200	96.95	6.32	103.27	--	--	peak
12	5350.000	47.93	6.74	54.67	74.00	-19.33	peak
13	5350.000	38.35	6.74	45.09	54.00	-8.91	AVG
14	5407.500	50.58	6.87	57.45	74.00	-16.55	peak
15	5407.500	39.08	6.87	45.95	54.00	-8.05	AVG
16	5464.700	51.38	7.02	58.40	68.20	-9.80	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5180 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 6		
Ant.Polar.:	Vertical		

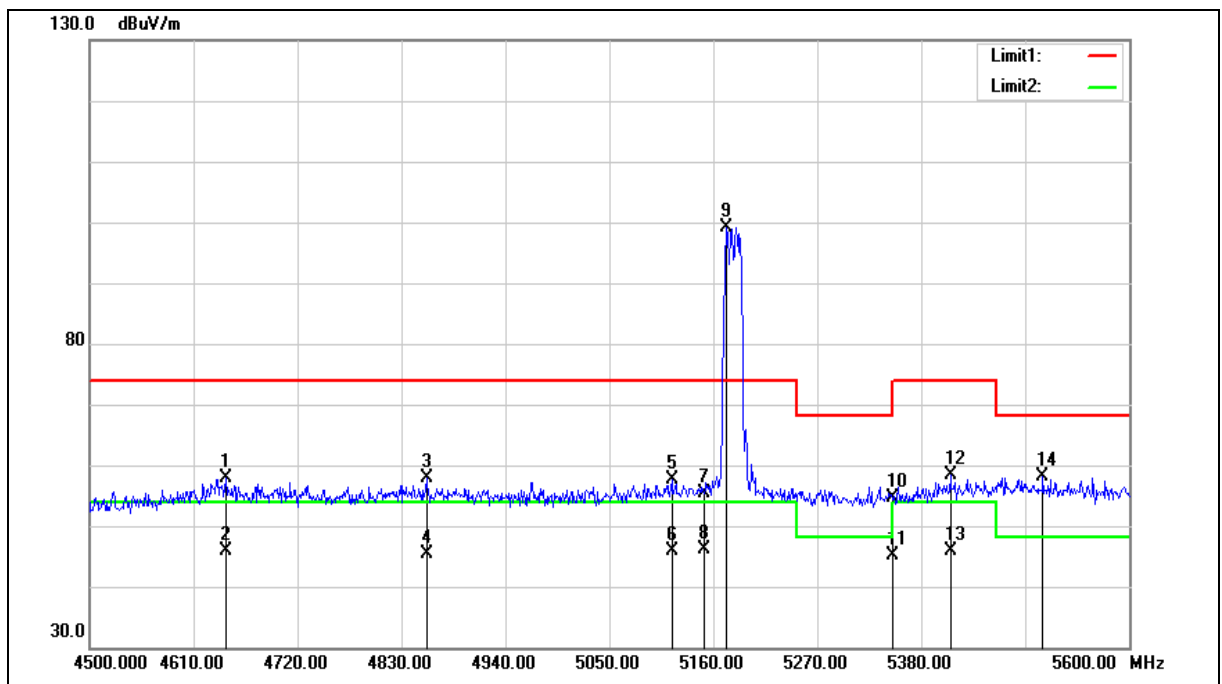

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5180 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 6		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4644.100	52.73	5.24	57.97	74.00	-16.03	peak
2	4644.100	40.71	5.24	45.95	54.00	-8.05	AVG
3	4856.400	52.18	5.63	57.81	74.00	-16.19	peak
4	4856.400	39.63	5.63	45.26	54.00	-8.74	AVG
5	5116.000	51.32	6.19	57.51	74.00	-16.49	peak
6	5116.000	39.57	6.19	45.76	54.00	-8.24	AVG
7	5150.000	49.20	6.27	55.47	74.00	-18.53	peak
8	5150.000	39.76	6.27	46.03	54.00	-7.97	AVG
9	5173.200	92.83	6.32	99.15	--	--	peak
10	5350.000	47.97	6.74	54.71	74.00	-19.29	peak
11	5350.000	38.42	6.74	45.16	54.00	-8.84	AVG
12	5410.800	51.47	6.88	58.35	74.00	-15.65	peak
13	5410.800	39.11	6.88	45.99	54.00	-8.01	AVG
14	5508.700	51.11	7.11	58.22	68.20	-9.98	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5320 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 6		
Ant.Polar.:	Horizontal		

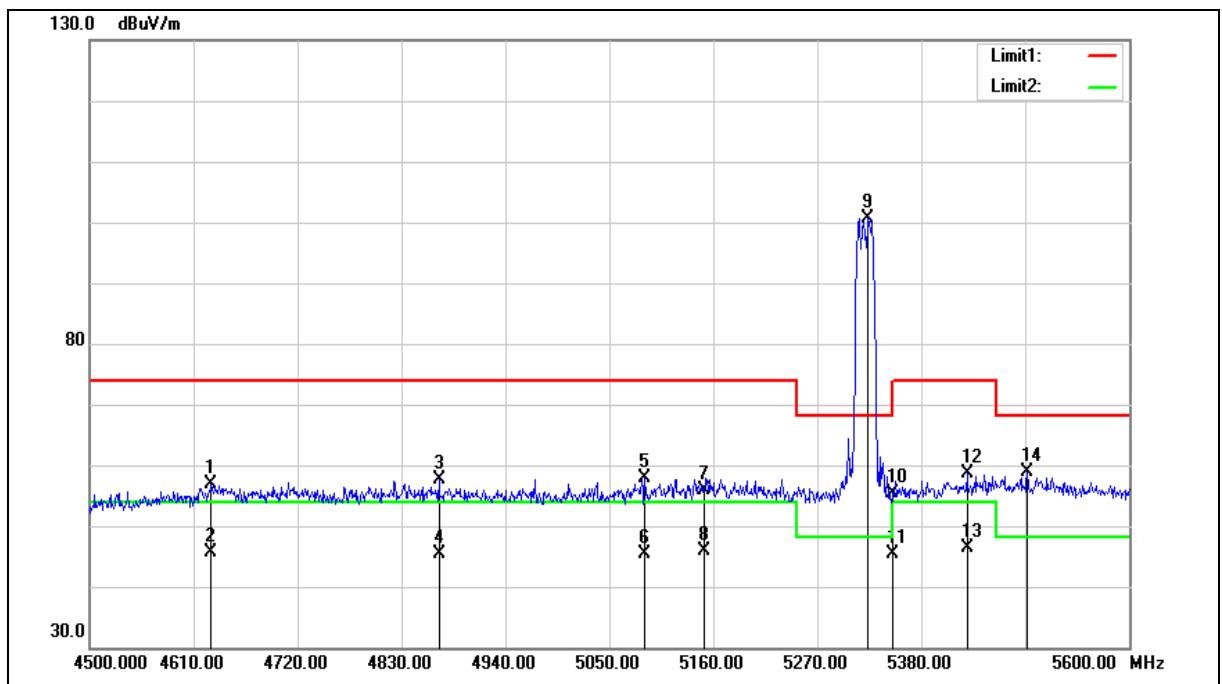

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5320 MHz	Temp.(°C)/Hum. (%RH):	26(°C)/60 %RH
Mode:	Mode 6		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4628.700	51.56	5.20	56.76	74.00	-17.24	peak
2	4628.700	40.41	5.20	45.61	54.00	-8.39	AVG
3	4869.600	52.01	5.66	57.67	74.00	-16.33	peak
4	4869.600	39.61	5.66	45.27	54.00	-8.73	AVG
5	5087.400	51.77	6.12	57.89	74.00	-16.11	peak
6	5087.400	39.29	6.12	45.41	54.00	-8.59	AVG
7	5150.000	49.58	6.27	55.85	74.00	-18.15	peak
8	5150.000	39.62	6.27	45.89	54.00	-8.11	AVG
9	5323.900	94.07	6.68	100.75	--	--	peak
10	5350.000	48.64	6.74	55.38	74.00	-18.62	peak
11	5350.000	38.71	6.74	45.45	54.00	-8.55	AVG
12	5428.400	51.68	6.93	58.61	74.00	-15.39	peak
13	5428.400	39.36	6.93	46.29	54.00	-7.71	AVG
14	5492.200	51.82	7.09	58.91	68.20	-9.29	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5320 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 6		
Ant.Polar.:	Vertical		

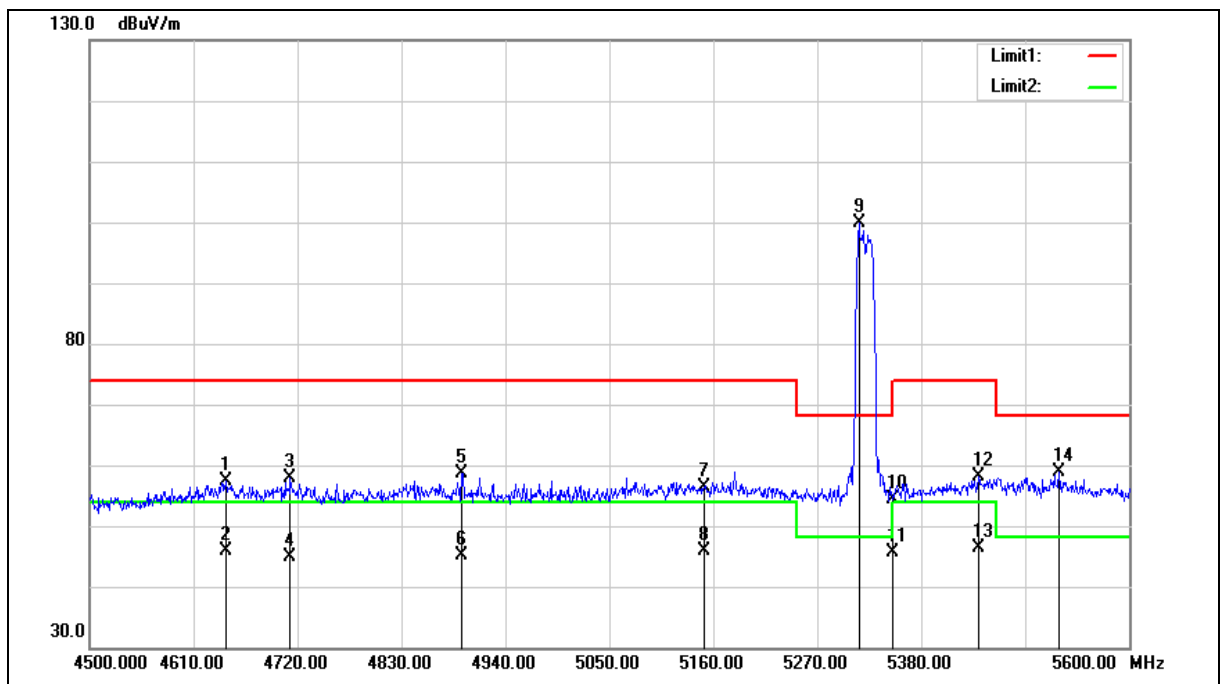

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5320 MHz	Temp.(°C)/Hum. (%RH):	26(°C)/60 %RH
Mode:	Mode 6		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4644.100	52.13	5.24	57.37	74.00	-16.63	peak
2	4644.100	40.75	5.24	45.99	54.00	-8.01	AVG
3	4712.300	52.45	5.36	57.81	74.00	-16.19	peak
4	4712.300	39.57	5.36	44.93	54.00	-9.07	AVG
5	4893.800	52.88	5.71	58.59	74.00	-15.41	peak
6	4893.800	39.50	5.71	45.21	54.00	-8.79	AVG
7	5150.000	50.19	6.27	56.46	74.00	-17.54	peak
8	5150.000	39.59	6.27	45.86	54.00	-8.14	AVG
9	5314.000	93.10	6.66	99.76	--	--	peak
10	5350.000	47.52	6.74	54.26	74.00	-19.74	peak
11	5350.000	38.89	6.74	45.63	54.00	-8.37	AVG
12	5440.500	51.11	6.97	58.08	74.00	-15.92	peak
13	5440.500	39.48	6.97	46.45	54.00	-7.55	AVG
14	5525.200	51.72	7.15	58.87	68.20	-9.33	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5500 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 6		
Ant.Polar.:	Horizontal		

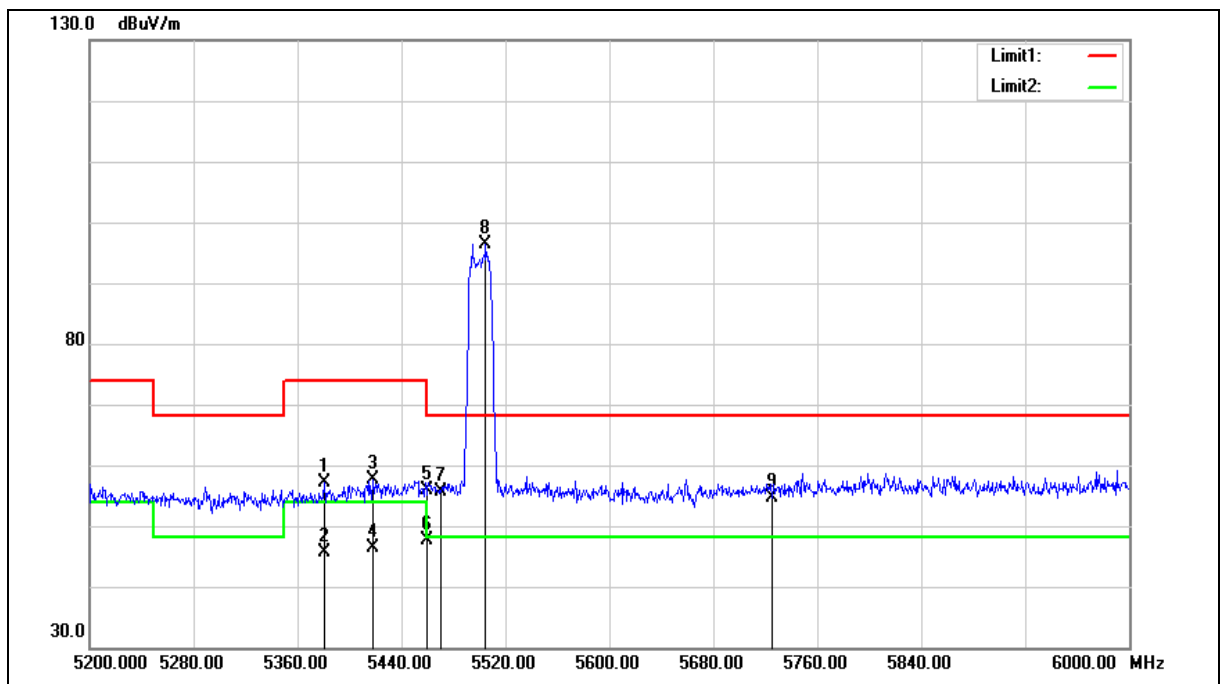

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5500 MHz	Temp.(°C)/Hum. (%RH):	26(°C)/60 %RH
Mode:	Mode 6		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5380.800	50.25	6.81	57.06	74.00	-16.94	peak
2	5380.800	38.81	6.81	45.62	54.00	-8.38	AVG
3	5418.400	50.65	6.91	57.56	74.00	-16.44	peak
4	5418.400	39.41	6.91	46.32	54.00	-7.68	AVG
5	5460.000	48.76	7.00	55.76	74.00	-18.24	peak
6	5460.000	40.64	7.00	47.64	54.00	-6.36	AVG
7	5470.000	48.55	7.03	55.58	68.20	-12.62	peak
8	5504.800	89.21	7.11	96.32	--	--	peak
9	5725.000	47.11	7.57	54.68	68.20	-13.52	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5500 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 6		
Ant.Polar.:	Vertical		

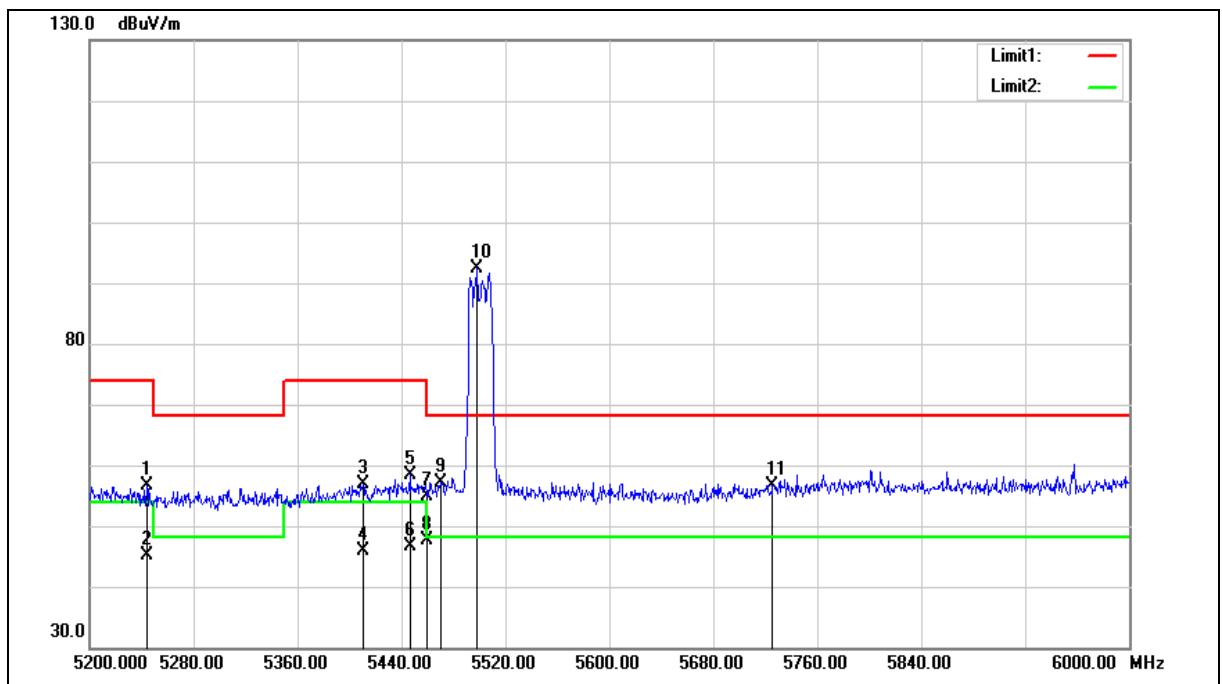

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5500 MHz	Temp.(°C)/Hum. (%RH):	26(°C)/60 %RH
Mode:	Mode 6		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5244.000	50.21	6.49	56.70	74.00	-17.30	peak
2	5244.000	38.63	6.49	45.12	54.00	-8.88	AVG
3	5410.400	50.00	6.88	56.88	74.00	-17.12	peak
4	5410.400	39.08	6.88	45.96	54.00	-8.04	AVG
5	5446.400	51.44	6.98	58.42	74.00	-15.58	peak
6	5446.400	39.56	6.98	46.54	54.00	-7.46	AVG
7	5460.000	47.98	7.00	54.98	74.00	-19.02	peak
8	5460.000	40.53	7.00	47.53	54.00	-6.47	AVG
9	5470.000	49.99	7.03	57.02	68.20	-11.18	peak
10	5498.400	85.31	7.10	92.41	--	--	peak
11	5725.000	48.99	7.57	56.56	68.20	-11.64	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5700 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 6		
Ant.Polar.:	Horizontal		

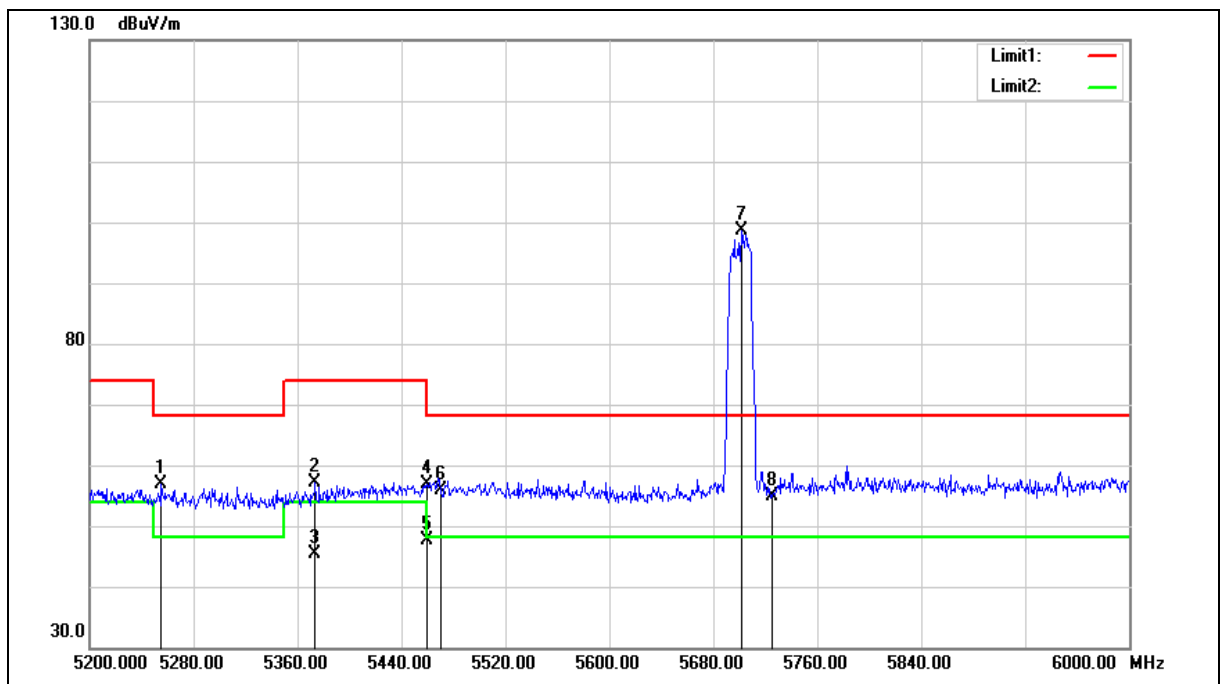

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5700 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 6		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5255.200	50.42	6.52	56.94	68.20	-11.26	peak
2	5373.600	50.22	6.80	57.02	74.00	-16.98	peak
3	5373.600	38.50	6.80	45.30	54.00	-8.70	AVG
4	5460.000	49.94	7.00	56.94	74.00	-17.06	peak
5	5460.000	40.54	7.00	47.54	54.00	-6.46	AVG
6	5470.000	48.74	7.03	55.77	68.20	-12.43	peak
7	5701.600	91.00	7.52	98.52	--	--	peak
8	5725.000	47.25	7.57	54.82	68.20	-13.38	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5700 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 6		
Ant.Polar.:	Vertical		

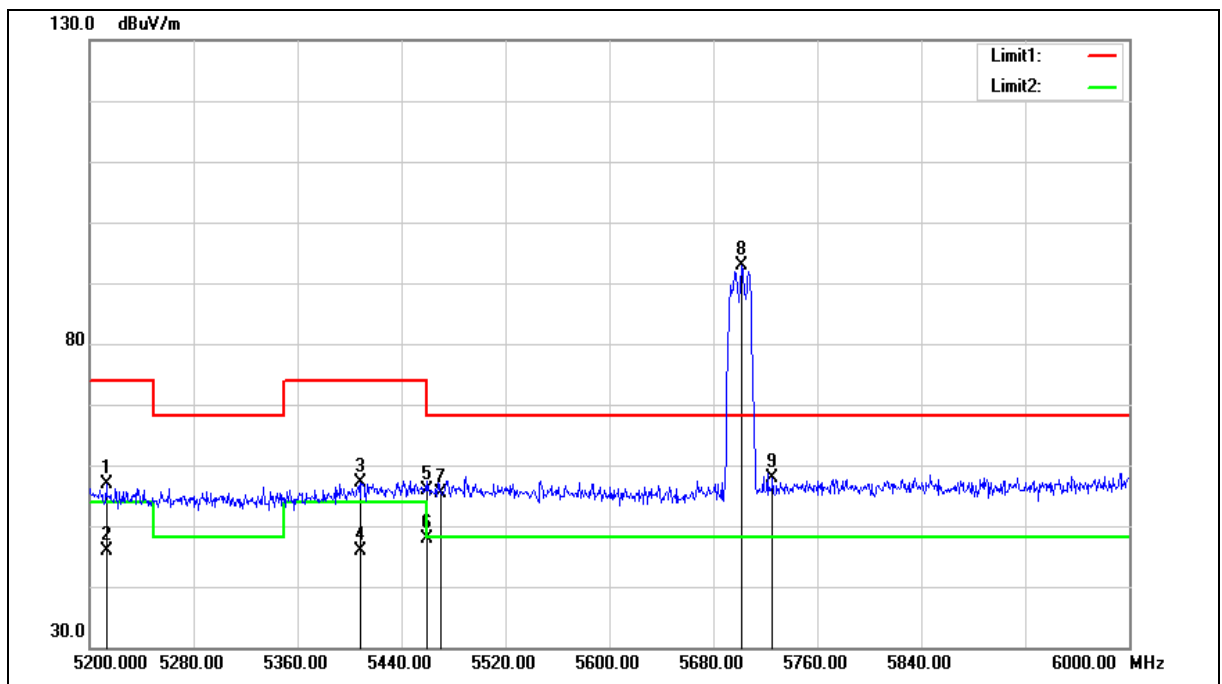

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5700 MHz	Temp.(°C)/Hum. (%RH):	26(°C)/60 %RH
Mode:	Mode 6		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5212.800	50.42	6.42	56.84	74.00	-17.16	peak
2	5212.800	39.50	6.42	45.92	54.00	-8.08	AVG
3	5408.800	50.28	6.87	57.15	74.00	-16.85	peak
4	5408.800	39.11	6.87	45.98	54.00	-8.02	AVG
5	5460.000	48.77	7.00	55.77	74.00	-18.23	peak
6	5460.000	40.84	7.00	47.84	54.00	-6.16	AVG
7	5470.000	48.32	7.03	55.35	68.20	-12.85	peak
8	5701.600	85.46	7.52	92.98	--	--	peak
9	5725.000	50.25	7.57	57.82	68.20	-10.38	peak

Note: 1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5745 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 6		
Ant.Polar.:	Horizontal		

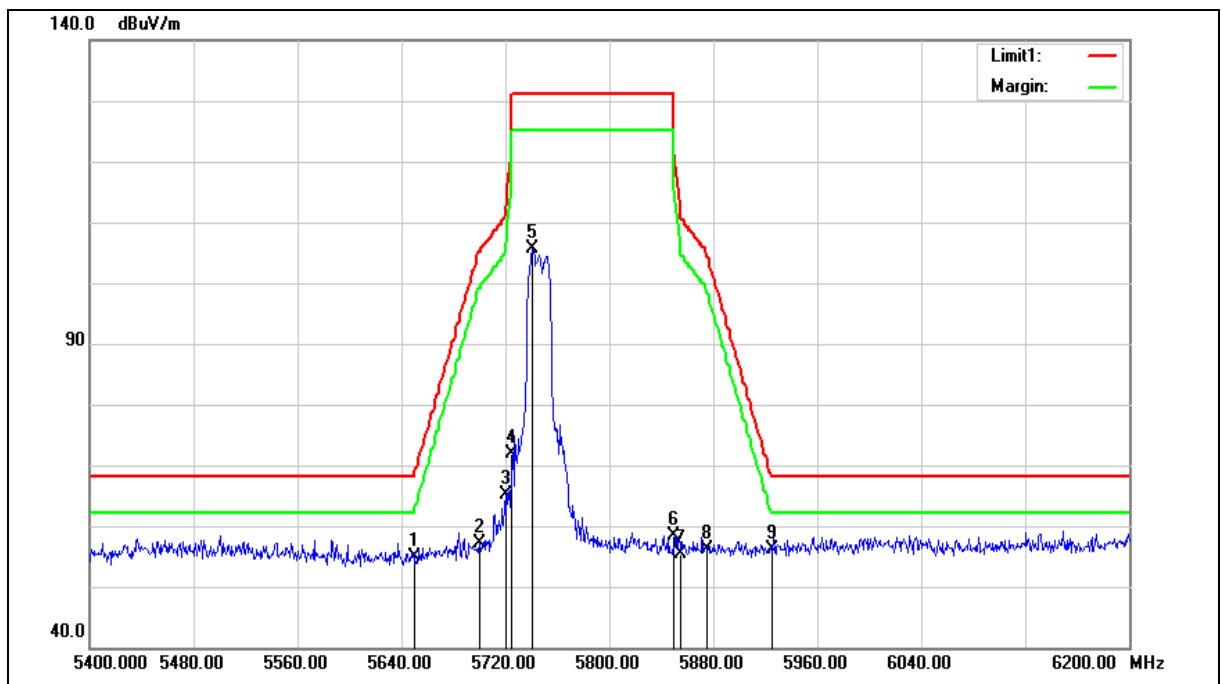

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5745 MHz	Temp.(°C)/Hum. (%RH):	26(°C)/60 %RH
Mode:	Mode 6		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5650.000	47.56	7.42	54.98	68.20	-13.22	peak
2	5700.000	49.53	7.52	57.05	105.20	-48.15	peak
3	5720.000	57.49	7.56	65.05	110.80	-45.75	peak
4	5725.000	64.37	7.57	71.94	122.20	-50.26	peak
5	5740.800	98.10	7.61	105.71	--	--	peak
6	5850.000	50.55	7.83	58.38	122.20	-63.82	peak
7	5855.000	47.65	7.85	55.50	110.80	-55.30	peak
8	5875.000	48.24	7.88	56.12	105.20	-49.08	peak
9	5925.000	48.03	8.00	56.03	68.20	-12.17	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5745 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 6		
Ant.Polar.:	Vertical		

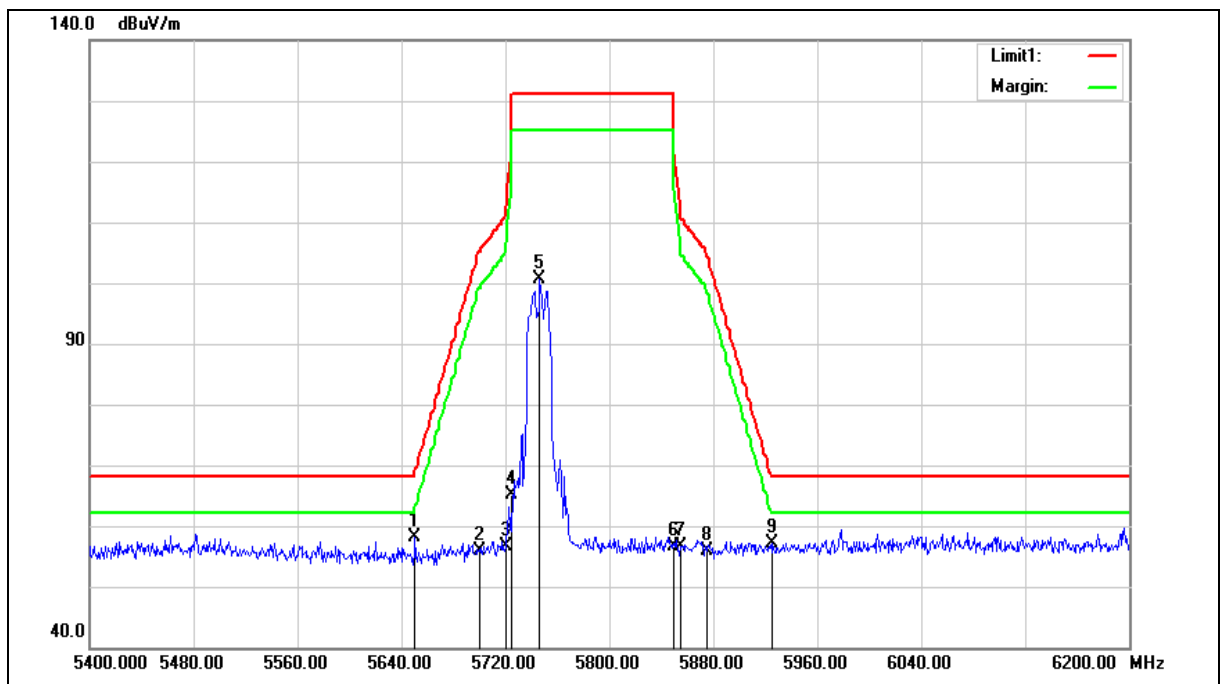

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5745 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 6		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5650.000	50.68	7.42	58.10	68.20	-10.10	peak
2	5700.000	48.24	7.52	55.76	105.20	-49.44	peak
3	5720.000	49.17	7.56	56.73	110.80	-54.07	peak
4	5725.000	57.54	7.57	65.11	122.20	-57.09	peak
5	5746.400	93.12	7.61	100.73	--	--	peak
6	5850.000	48.75	7.83	56.58	122.20	-65.62	peak
7	5855.000	48.83	7.85	56.68	110.80	-54.12	peak
8	5875.000	48.07	7.88	55.95	105.20	-49.25	peak
9	5925.000	49.14	8.00	57.14	68.20	-11.06	peak

Note: 1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5825 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 6		
Ant.Polar.:	Horizontal		

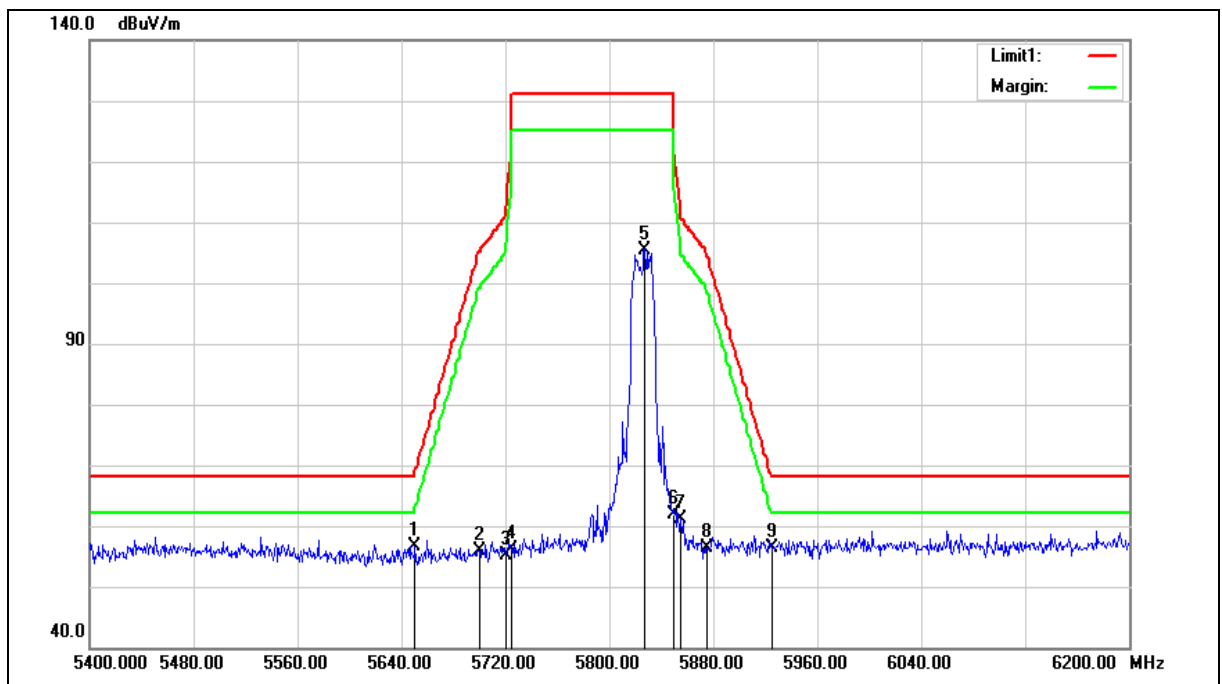

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5825 MHz	Temp.(°C)/Hum. (%RH):	26(°C)/60 %RH
Mode:	Mode 6		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5650.000	49.28	7.42	56.70	68.20	-11.50	peak
2	5700.000	48.25	7.52	55.77	105.20	-49.43	peak
3	5720.000	47.60	7.56	55.16	110.80	-55.64	peak
4	5725.000	48.66	7.57	56.23	122.20	-65.97	peak
5	5827.200	97.72	7.78	105.50	--	--	peak
6	5850.000	54.17	7.83	62.00	122.20	-60.20	peak
7	5855.000	53.32	7.85	61.17	110.80	-49.63	peak
8	5875.000	48.60	7.88	56.48	105.20	-48.72	peak
9	5925.000	48.45	8.00	56.45	68.20	-11.75	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5825 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 6		
Ant.Polar.:	Vertical		

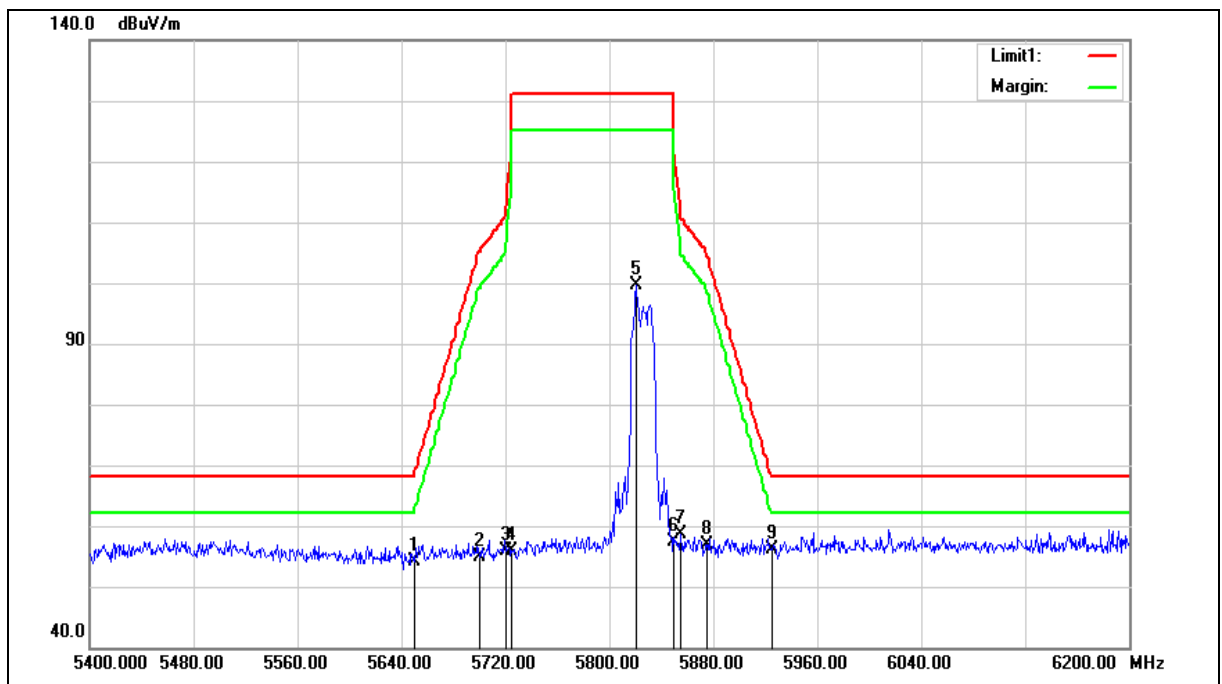

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5825 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 6		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5650.000	46.77	7.42	54.19	68.20	-14.01	peak
2	5700.000	47.44	7.52	54.96	105.20	-50.24	peak
3	5720.000	48.38	7.56	55.94	110.80	-54.86	peak
4	5725.000	48.25	7.57	55.82	122.20	-66.38	peak
5	5820.800	91.83	7.77	99.60	--	--	peak
6	5850.000	49.45	7.83	57.28	122.20	-64.92	peak
7	5855.000	50.74	7.85	58.59	110.80	-52.21	peak
8	5875.000	48.96	7.88	56.84	105.20	-48.36	peak
9	5925.000	48.01	8.00	56.01	68.20	-12.19	peak

Note: 1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5180 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 9		
Ant.Polar.:	Horizontal		

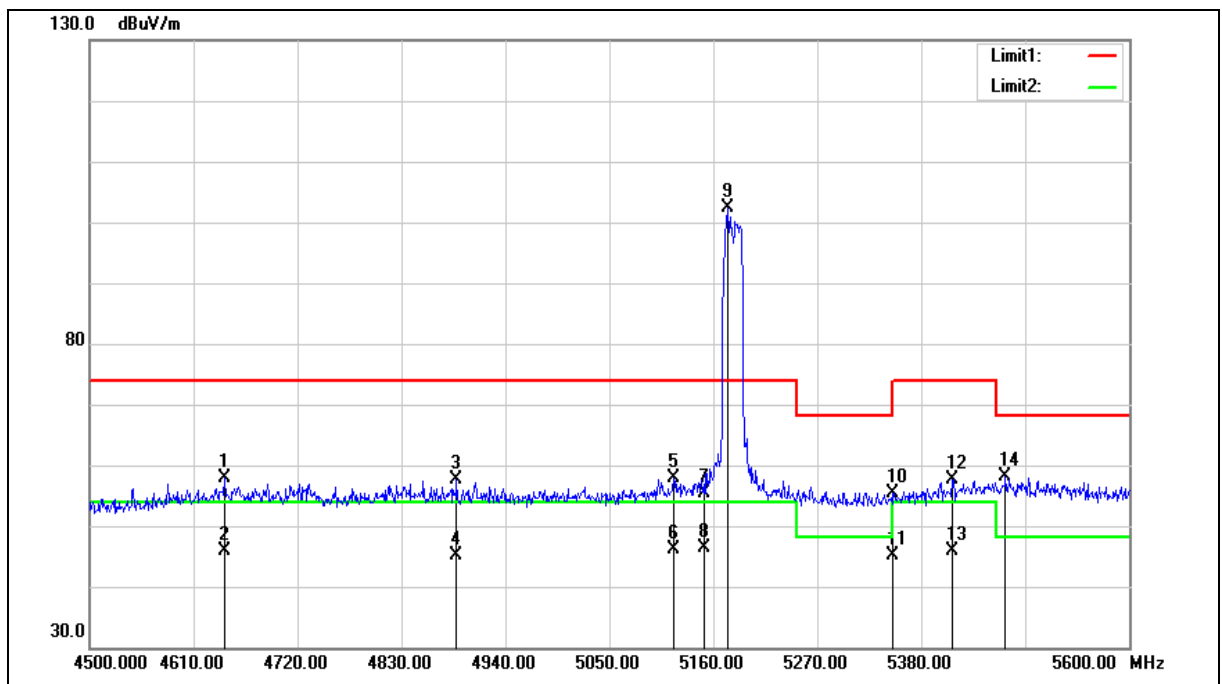

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5180 MHz	Temp.(°C)/Hum. (%RH):	26(°C)/60 %RH
Mode:	Mode 9		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4643.000	52.75	5.24	57.99	74.00	-16.01	peak
2	4643.000	40.69	5.24	45.93	54.00	-8.07	AVG
3	4888.300	51.87	5.70	57.57	74.00	-16.43	peak
4	4888.300	39.45	5.70	45.15	54.00	-8.85	AVG
5	5118.200	51.67	6.20	57.87	74.00	-16.13	peak
6	5118.200	39.89	6.20	46.09	54.00	-7.91	AVG
7	5150.000	49.09	6.27	55.36	74.00	-18.64	peak
8	5150.000	40.12	6.27	46.39	54.00	-7.61	AVG
9	5175.400	96.08	6.33	102.41	--	--	peak
10	5350.000	48.57	6.74	55.31	74.00	-18.69	peak
11	5350.000	38.45	6.74	45.19	54.00	-8.81	AVG
12	5413.000	50.63	6.89	57.52	74.00	-16.48	peak
13	5413.000	39.05	6.89	45.94	54.00	-8.06	AVG
14	5469.100	51.00	7.03	58.03	68.20	-10.17	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5180 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 9		
Ant.Polar.:	Vertical		

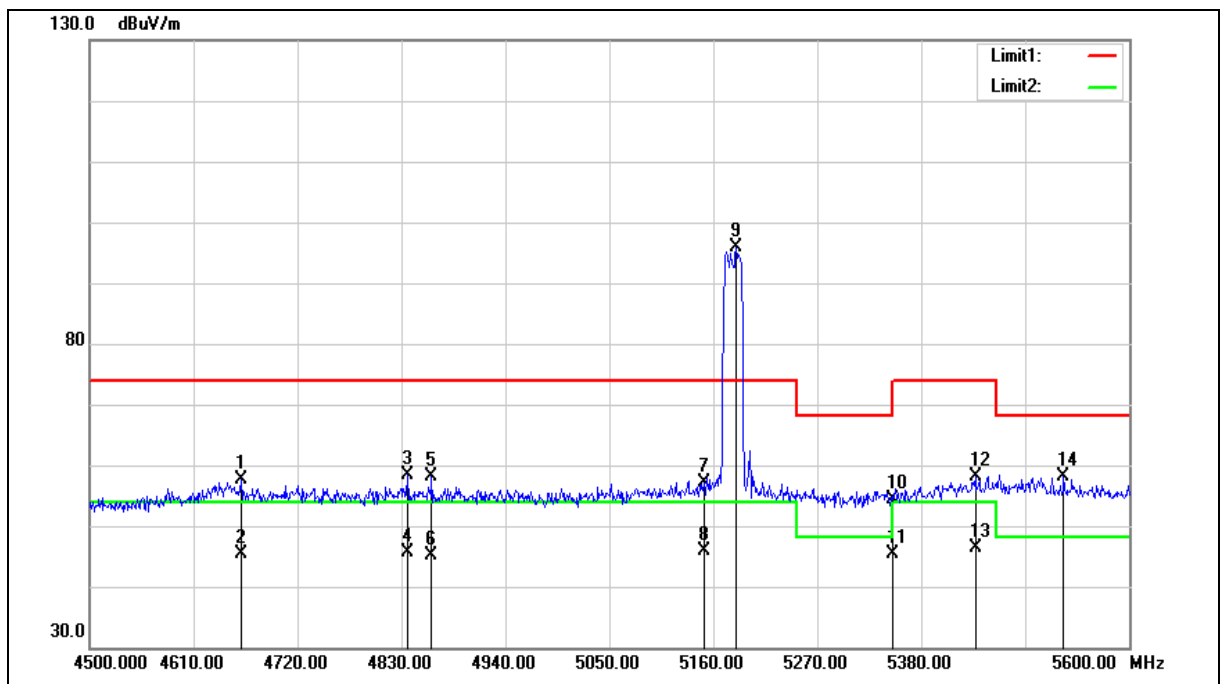

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5180 MHz	Temp.(°C)/Hum. (%RH):	26(°C)/60 %RH
Mode:	Mode 9		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4660.600	52.39	5.26	57.65	74.00	-16.35	peak
2	4660.600	40.00	5.26	45.26	54.00	-8.74	AVG
3	4836.600	52.71	5.60	58.31	74.00	-15.69	peak
4	4836.600	39.96	5.60	45.56	54.00	-8.44	AVG
5	4861.900	52.39	5.64	58.03	74.00	-15.97	peak
6	4861.900	39.60	5.64	45.24	54.00	-8.76	AVG
7	5150.000	50.76	6.27	57.03	74.00	-16.97	peak
8	5150.000	39.61	6.27	45.88	54.00	-8.12	AVG
9	5184.200	89.58	6.34	95.92	--	--	peak
10	5350.000	47.62	6.74	54.36	74.00	-19.64	peak
11	5350.000	38.52	6.74	45.26	54.00	-8.74	AVG
12	5437.200	51.13	6.95	58.08	74.00	-15.92	peak
13	5437.200	39.48	6.95	46.43	54.00	-7.57	AVG
14	5530.700	50.85	7.16	58.01	68.20	-10.19	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5320 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 9		
Ant.Polar.:	Horizontal		

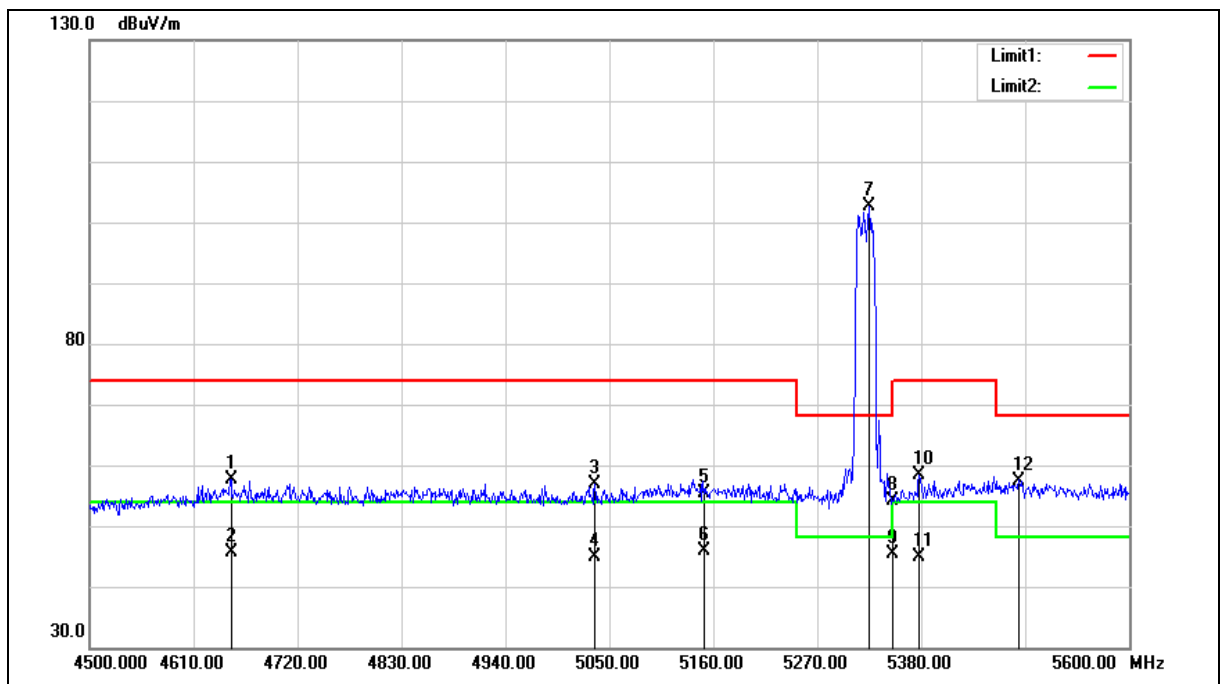

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5320 MHz	Temp.(°C)/Hum. (%RH):	26(°C)/60 %RH
Mode:	Mode 9		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4649.600	52.44	5.24	57.68	74.00	-16.32	peak
2	4649.600	40.42	5.24	45.66	54.00	-8.34	AVG
3	5034.600	50.97	5.99	56.96	74.00	-17.04	peak
4	5034.600	38.77	5.99	44.76	54.00	-9.24	AVG
5	5150.000	49.08	6.27	55.35	74.00	-18.65	peak
6	5150.000	39.57	6.27	45.84	54.00	-8.16	AVG
7	5325.000	95.88	6.68	102.56	--	--	peak
8	5350.000	47.50	6.74	54.24	74.00	-19.76	peak
9	5350.000	38.60	6.74	45.34	54.00	-8.66	AVG
10	5377.800	51.47	6.81	58.28	74.00	-15.72	peak
11	5377.800	38.02	6.81	44.83	54.00	-9.17	AVG
12	5483.400	50.44	7.06	57.50	68.20	-10.70	peak

Note: 1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5320 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 9		
Ant.Polar.:	Vertical		

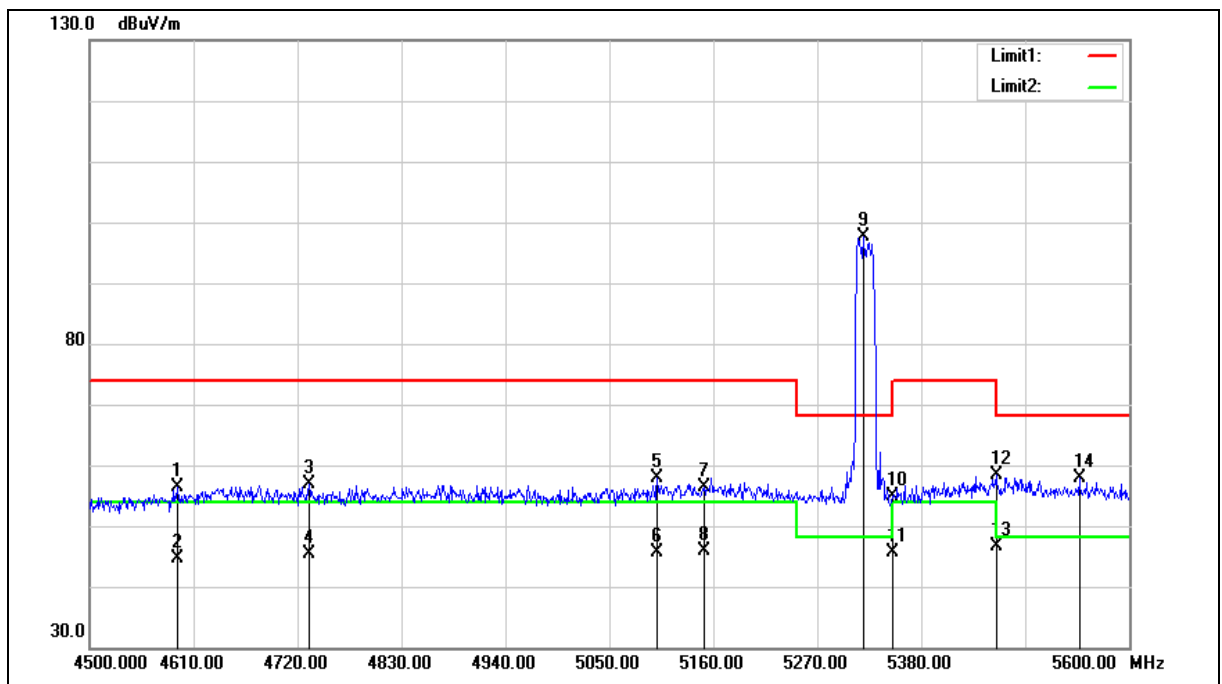

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5320 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 9		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4593.500	51.16	5.14	56.30	74.00	-17.70	peak
2	4593.500	39.38	5.14	44.52	54.00	-9.48	AVG
3	4732.100	51.58	5.39	56.97	74.00	-17.03	peak
4	4732.100	40.03	5.39	45.42	54.00	-8.58	AVG
5	5100.600	51.70	6.15	57.85	74.00	-16.15	peak
6	5100.600	39.48	6.15	45.63	54.00	-8.37	AVG
7	5150.000	50.00	6.27	56.27	74.00	-17.73	peak
8	5150.000	39.52	6.27	45.79	54.00	-8.21	AVG
9	5318.400	90.97	6.67	97.64	--	--	peak
10	5350.000	48.26	6.74	55.00	74.00	-19.00	peak
11	5350.000	38.79	6.74	45.53	54.00	-8.47	AVG
12	5459.200	51.41	7.00	58.41	74.00	-15.59	peak
13	5459.200	39.55	7.00	46.55	54.00	-7.45	AVG
14	5547.200	50.60	7.20	57.80	68.20	-10.40	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5500 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 9		
Ant.Polar.:	Horizontal		

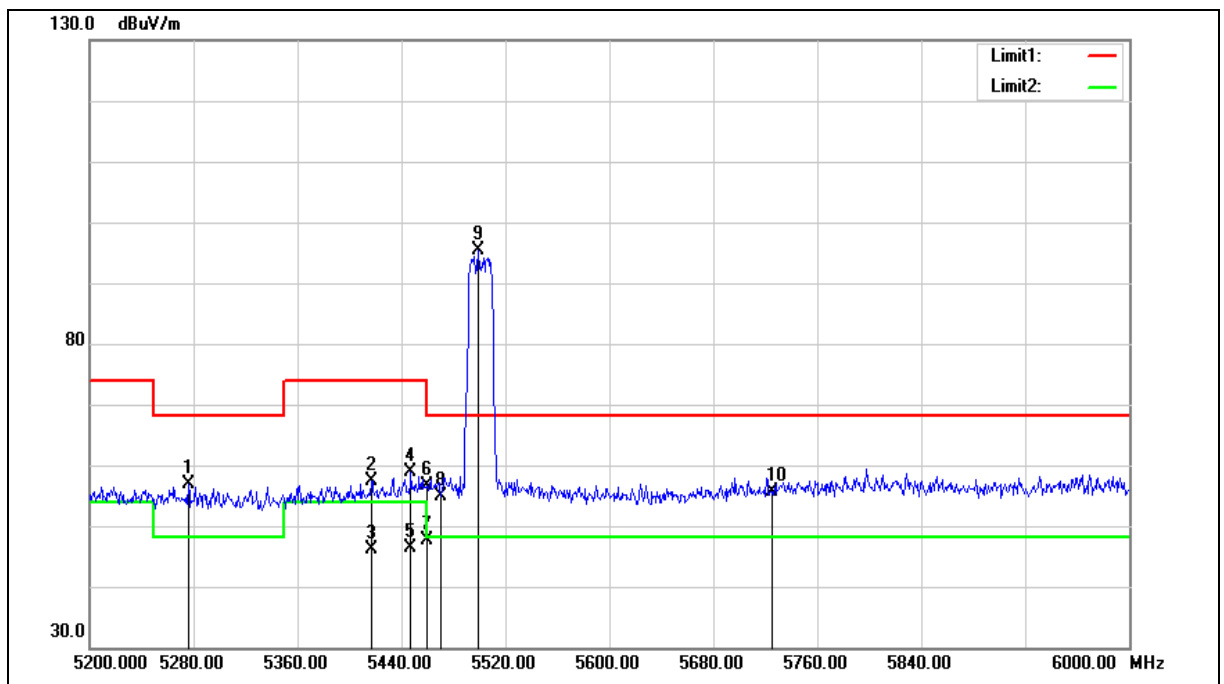

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5500 MHz	Temp.(°C)/Hum. (%RH):	26(°C)/60 %RH
Mode:	Mode 9		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5276.000	50.28	6.57	56.85	68.20	-11.35	peak
2	5416.800	50.49	6.91	57.40	74.00	-16.60	peak
3	5416.800	39.10	6.91	46.01	54.00	-7.99	AVG
4	5447.200	51.81	6.98	58.79	74.00	-15.21	peak
5	5447.200	39.50	6.98	46.48	54.00	-7.52	AVG
6	5460.000	49.65	7.00	56.65	74.00	-17.35	peak
7	5460.000	40.58	7.00	47.58	54.00	-6.42	AVG
8	5470.000	47.82	7.03	54.85	68.20	-13.35	peak
9	5499.200	88.23	7.10	95.33	--	--	peak
10	5725.000	48.07	7.57	55.64	68.20	-12.56	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5500 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 9		
Ant.Polar.:	Vertical		

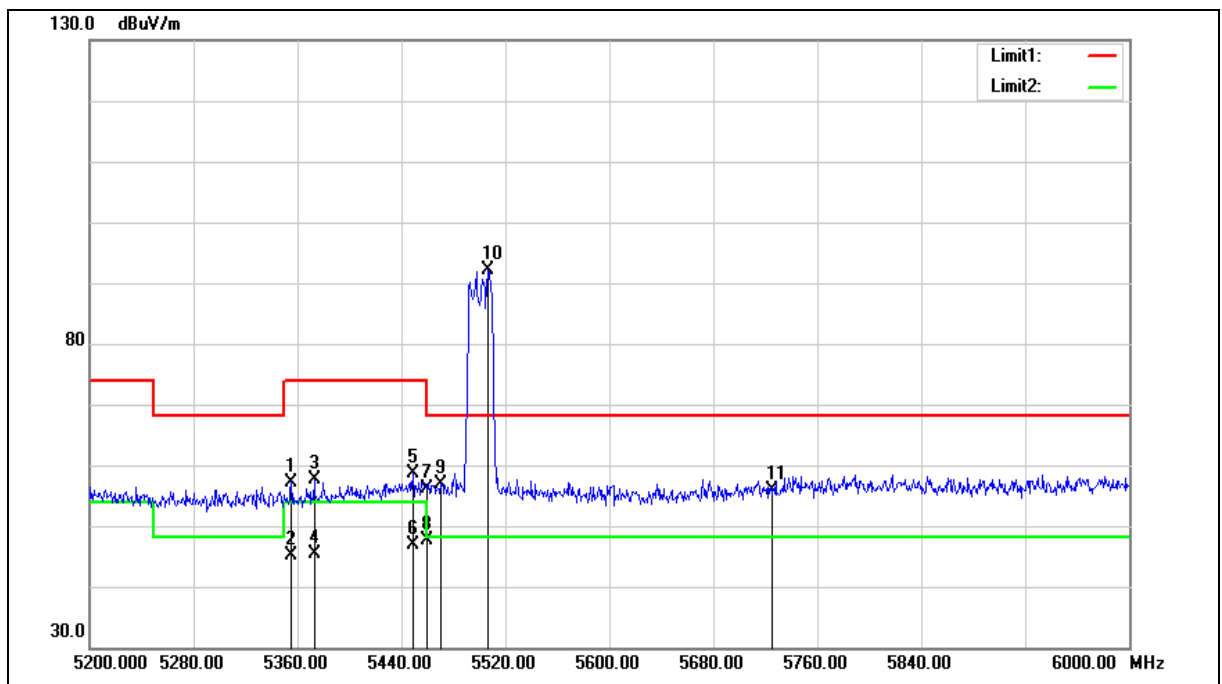

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5500 MHz	Temp.(°C)/Hum. (%RH):	26(°C)/60 %RH
Mode:	Mode 9		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5355.200	50.50	6.75	57.25	74.00	-16.75	peak
2	5355.200	38.37	6.75	45.12	54.00	-8.88	AVG
3	5372.800	50.73	6.80	57.53	74.00	-16.47	peak
4	5372.800	38.61	6.80	45.41	54.00	-8.59	AVG
5	5448.800	51.64	6.98	58.62	74.00	-15.38	peak
6	5448.800	39.87	6.98	46.85	54.00	-7.15	AVG
7	5460.000	49.04	7.00	56.04	74.00	-17.96	peak
8	5460.000	40.52	7.00	47.52	54.00	-6.48	AVG
9	5470.000	49.78	7.03	56.81	68.20	-11.39	peak
10	5506.400	85.08	7.11	92.19	--	--	peak
11	5725.000	48.42	7.57	55.99	68.20	-12.21	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5700 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 9		
Ant.Polar.:	Horizontal		

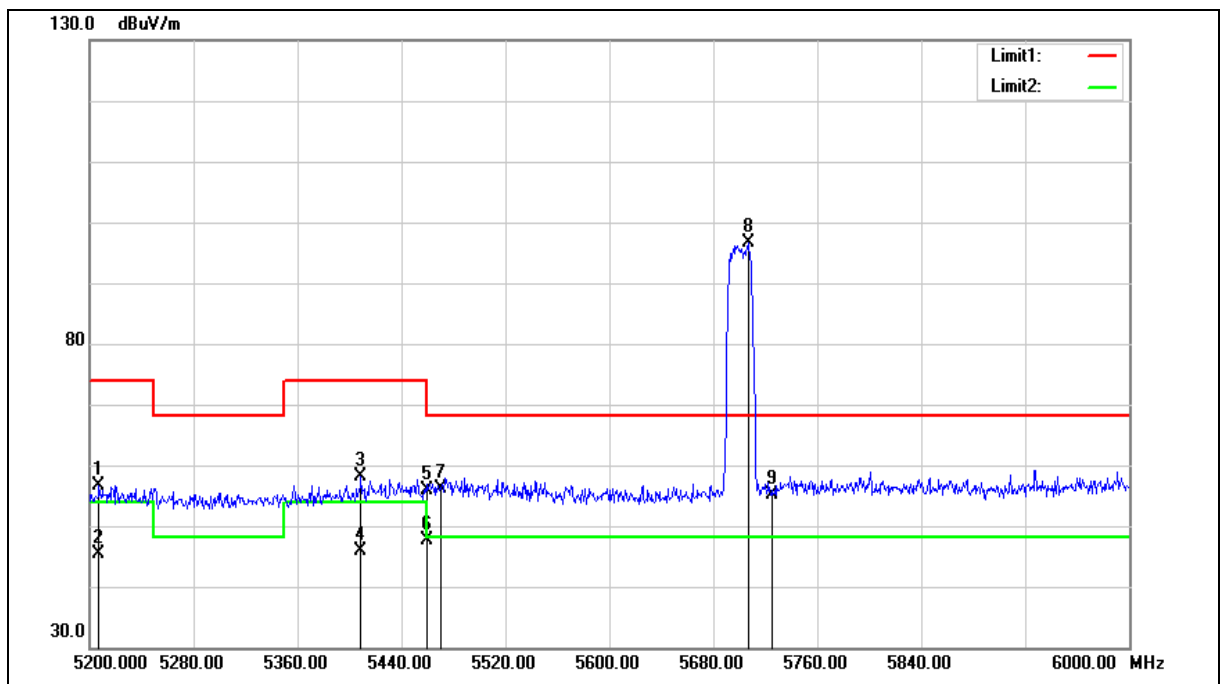

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5700 MHz	Temp.(°C)/Hum. (%RH):	26(°C)/60 %RH
Mode:	Mode 9		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5207.200	50.27	6.40	56.67	74.00	-17.33	peak
2	5207.200	39.09	6.40	45.49	54.00	-8.51	AVG
3	5408.800	51.31	6.87	58.18	74.00	-15.82	peak
4	5408.800	38.99	6.87	45.86	54.00	-8.14	AVG
5	5460.000	48.76	7.00	55.76	74.00	-18.24	peak
6	5460.000	40.52	7.00	47.52	54.00	-6.48	AVG
7	5470.000	49.11	7.03	56.14	68.20	-12.06	peak
8	5707.200	89.02	7.53	96.55	--	--	peak
9	5725.000	47.52	7.57	55.09	68.20	-13.11	peak

Note: 1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5700 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 9		
Ant.Polar.:	Vertical		

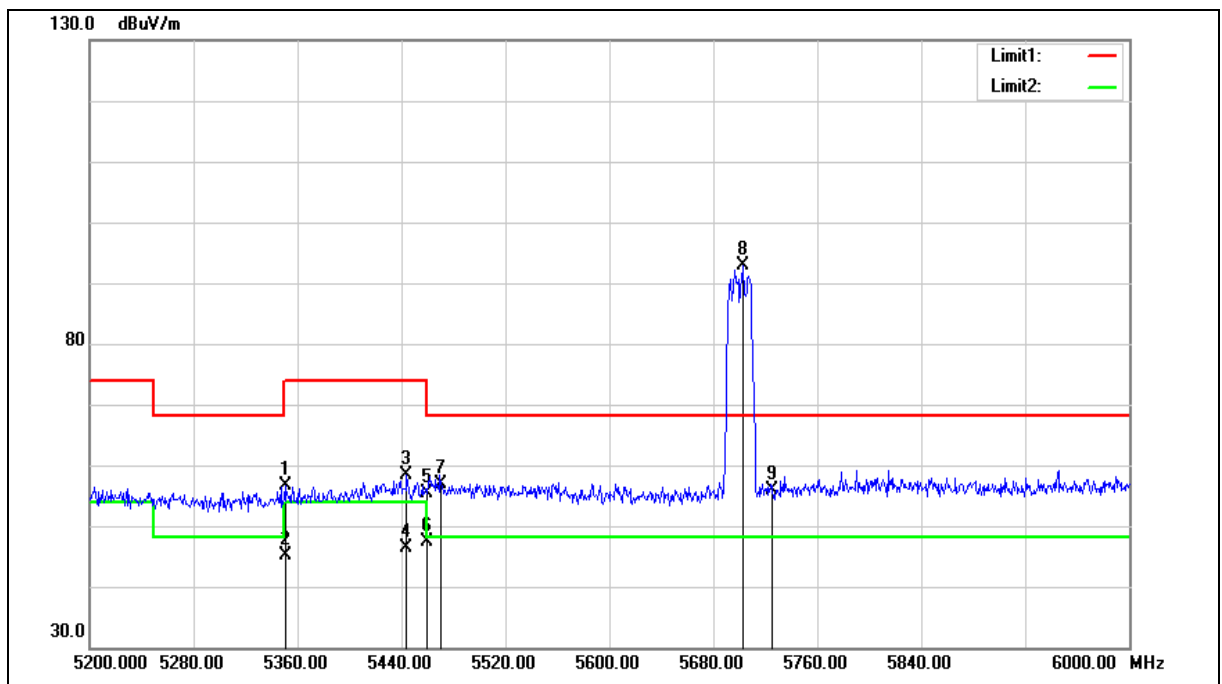

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5700 MHz	Temp.(°C)/Hum. (%RH):	26(°C)/60 %RH
Mode:	Mode 9		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5350.400	49.81	6.74	56.55	74.00	-17.45	peak
2	5350.400	38.32	6.74	45.06	54.00	-8.94	AVG
3	5444.000	51.38	6.97	58.35	74.00	-15.65	peak
4	5444.000	39.43	6.97	46.40	54.00	-7.60	AVG
5	5460.000	48.40	7.00	55.40	74.00	-18.60	peak
6	5460.000	40.49	7.00	47.49	54.00	-6.51	AVG
7	5470.000	49.89	7.03	56.92	68.20	-11.28	peak
8	5703.200	85.36	7.53	92.89	--	--	peak
9	5725.000	48.35	7.57	55.92	68.20	-12.28	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5745 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 9		
Ant.Polar.:	Horizontal		

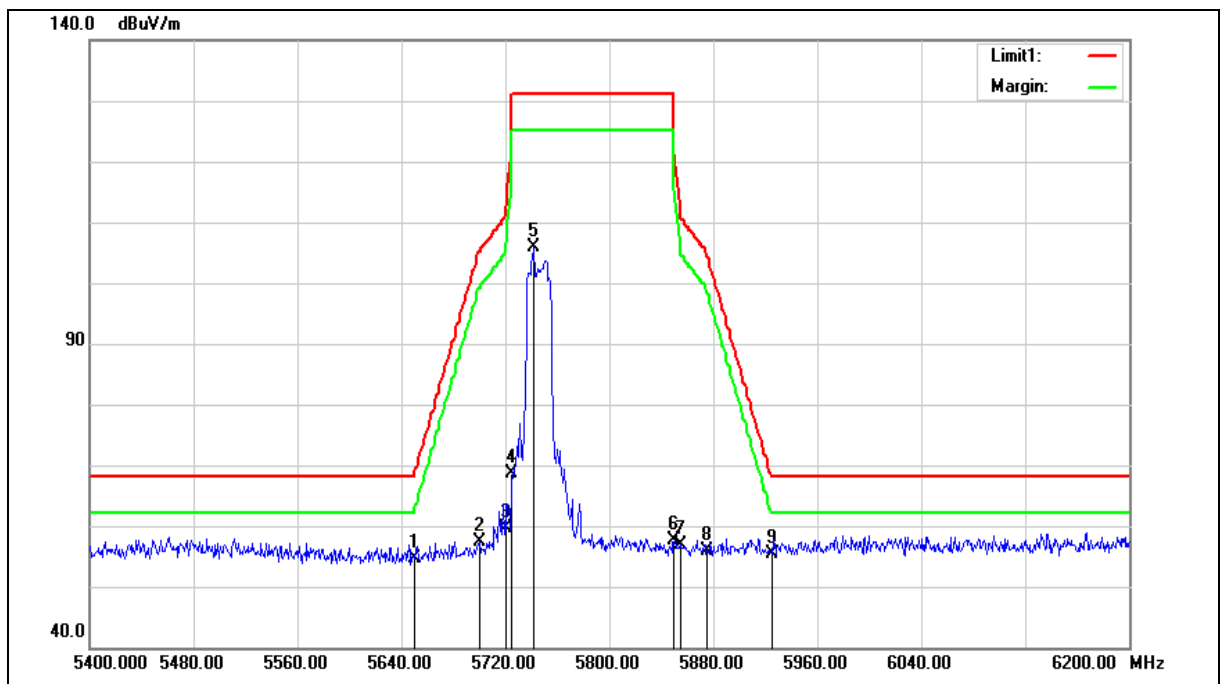

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5745 MHz	Temp.(°C)/Hum. (%RH):	26(°C)/60 %RH
Mode:	Mode 9		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5650.000	47.12	7.42	54.54	68.20	-13.66	peak
2	5700.000	49.89	7.52	57.41	105.20	-47.79	peak
3	5720.000	52.14	7.56	59.70	110.80	-51.10	peak
4	5725.000	61.18	7.57	68.75	122.20	-53.45	peak
5	5741.600	98.27	7.61	105.88	--	--	peak
6	5850.000	49.79	7.83	57.62	122.20	-64.58	peak
7	5855.000	49.15	7.85	57.00	110.80	-53.80	peak
8	5875.000	47.88	7.88	55.76	105.20	-49.44	peak
9	5925.000	47.48	8.00	55.48	68.20	-12.72	peak

Note: 1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5745 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 9		
Ant.Polar.:	Vertical		

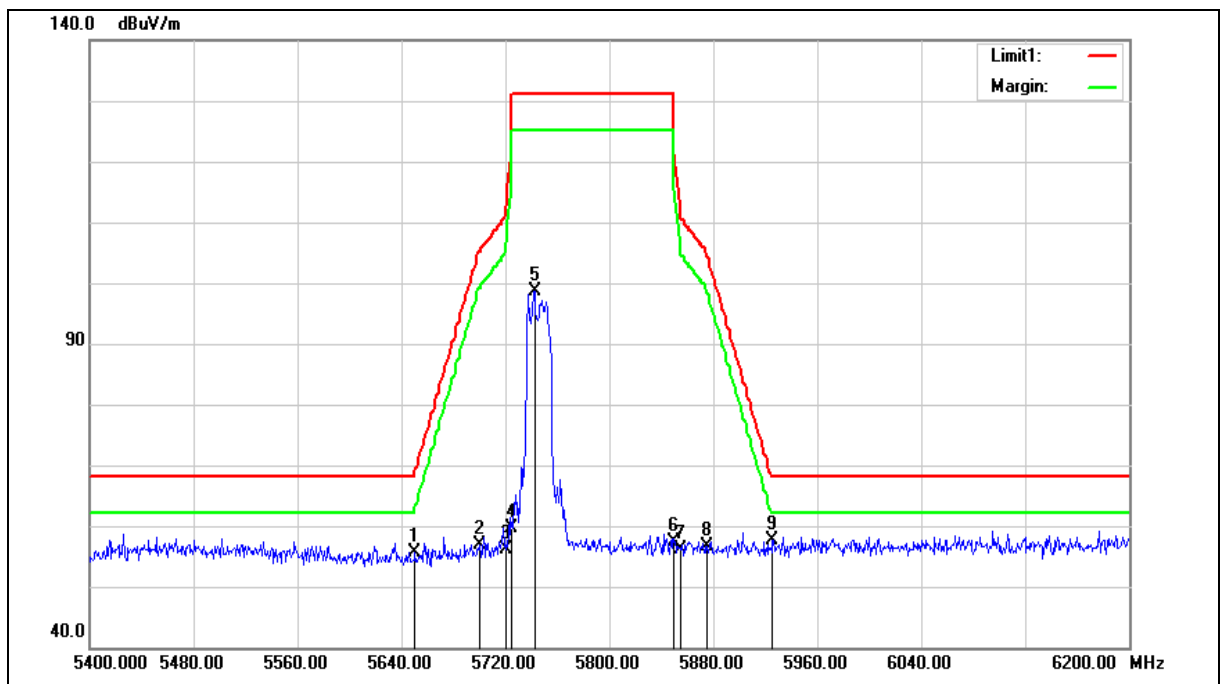

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5745 MHz	Temp.(°C)/Hum. (%RH):	26(°C)/60 %RH
Mode:	Mode 9		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5650.000	48.25	7.42	55.67	68.20	-12.53	peak
2	5700.000	49.25	7.52	56.77	105.20	-48.43	peak
3	5720.000	48.61	7.56	56.17	110.80	-54.63	peak
4	5725.000	52.06	7.57	59.63	122.20	-62.57	peak
5	5742.400	91.12	7.61	98.73	--	--	peak
6	5850.000	49.51	7.83	57.34	122.20	-64.86	peak
7	5855.000	48.24	7.85	56.09	110.80	-54.71	peak
8	5875.000	48.64	7.88	56.52	105.20	-48.68	peak
9	5925.000	49.52	8.00	57.52	68.20	-10.68	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5825 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 9		
Ant.Polar.:	Horizontal		

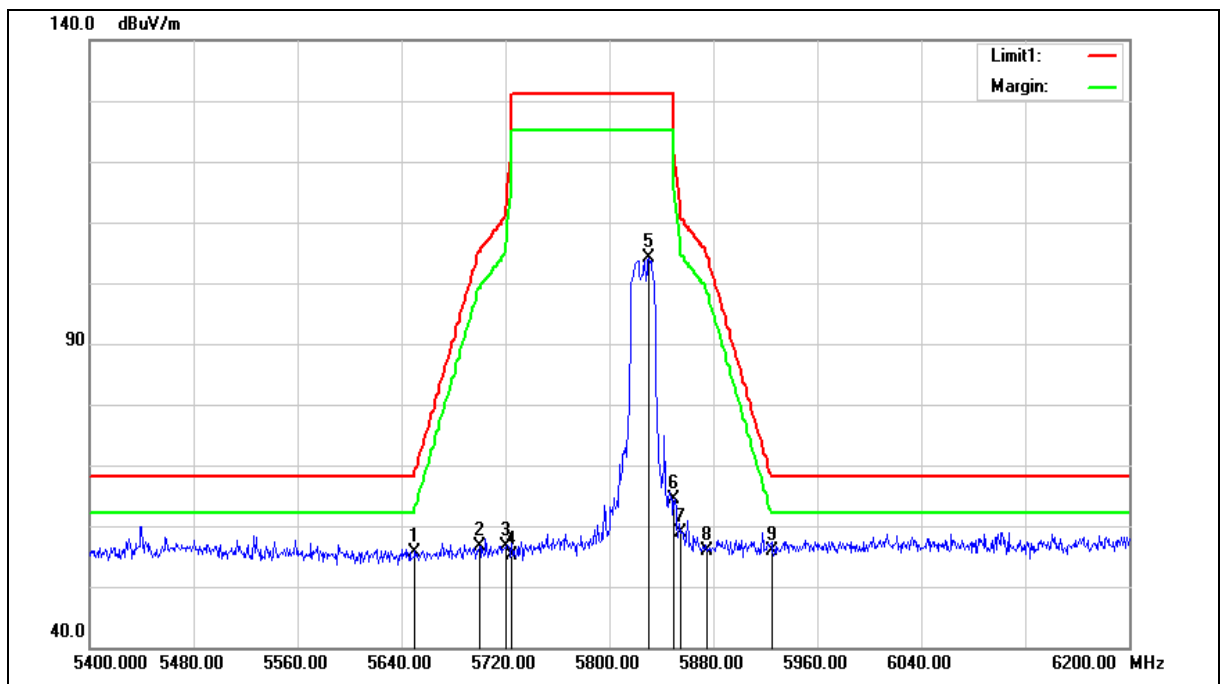

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5825 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 9		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5650.000	48.33	7.42	55.75	68.20	-12.45	peak
2	5700.000	49.01	7.52	56.53	105.20	-48.67	peak
3	5720.000	49.17	7.56	56.73	110.80	-54.07	peak
4	5725.000	47.65	7.57	55.22	122.20	-66.98	peak
5	5830.400	96.34	7.80	104.14	--	--	peak
6	5850.000	56.55	7.83	64.38	122.20	-57.82	peak
7	5855.000	50.97	7.85	58.82	110.80	-51.98	peak
8	5875.000	47.97	7.88	55.85	105.20	-49.35	peak
9	5925.000	48.00	8.00	56.00	68.20	-12.20	peak

Note: 1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5825 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 9		
Ant.Polar.:	Vertical		

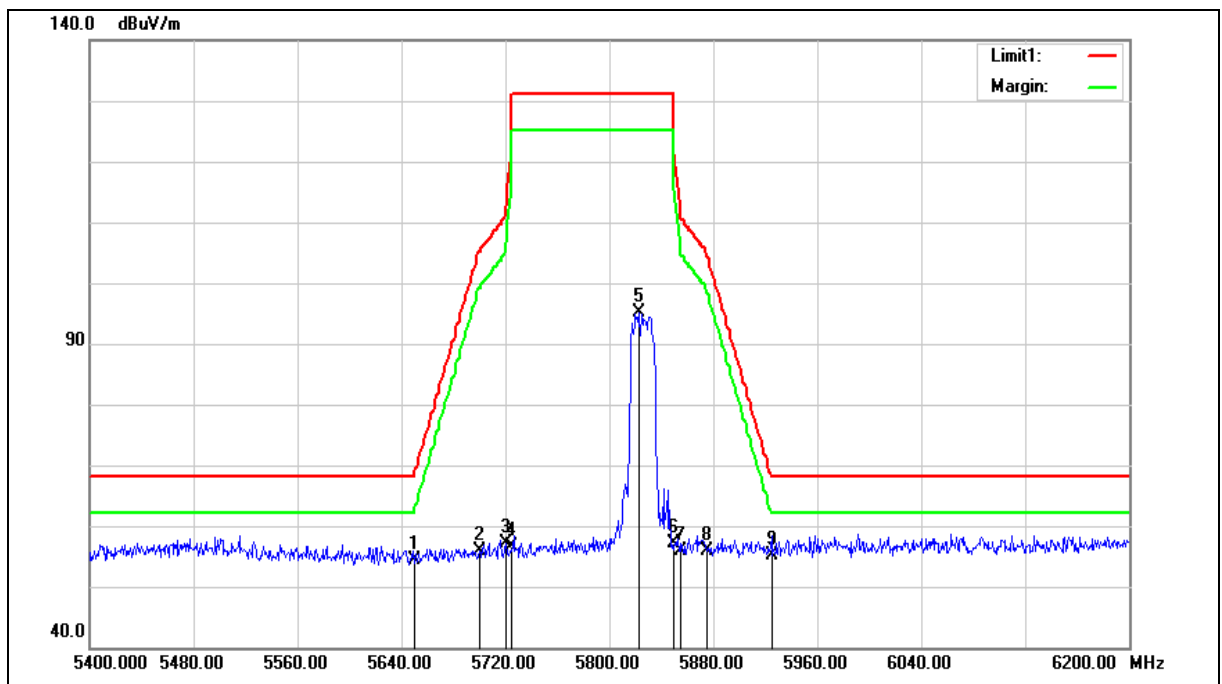

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5825 MHz	Temp.(°C)/Hum. (%RH):	26(°C)/60 %RH
Mode:	Mode 9		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5650.000	46.88	7.42	54.30	68.20	-13.90	peak
2	5700.000	48.27	7.52	55.79	105.20	-49.41	peak
3	5720.000	49.55	7.56	57.11	110.80	-53.69	peak
4	5725.000	49.17	7.57	56.74	122.20	-65.46	peak
5	5823.200	87.28	7.78	95.06	--	--	peak
6	5850.000	49.29	7.83	57.12	122.20	-65.08	peak
7	5855.000	48.09	7.85	55.94	110.80	-54.86	peak
8	5875.000	47.91	7.88	55.79	105.20	-49.41	peak
9	5925.000	47.08	8.00	55.08	68.20	-13.12	peak

Note: 1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5190 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 10		
Ant.Polar.:	Horizontal		

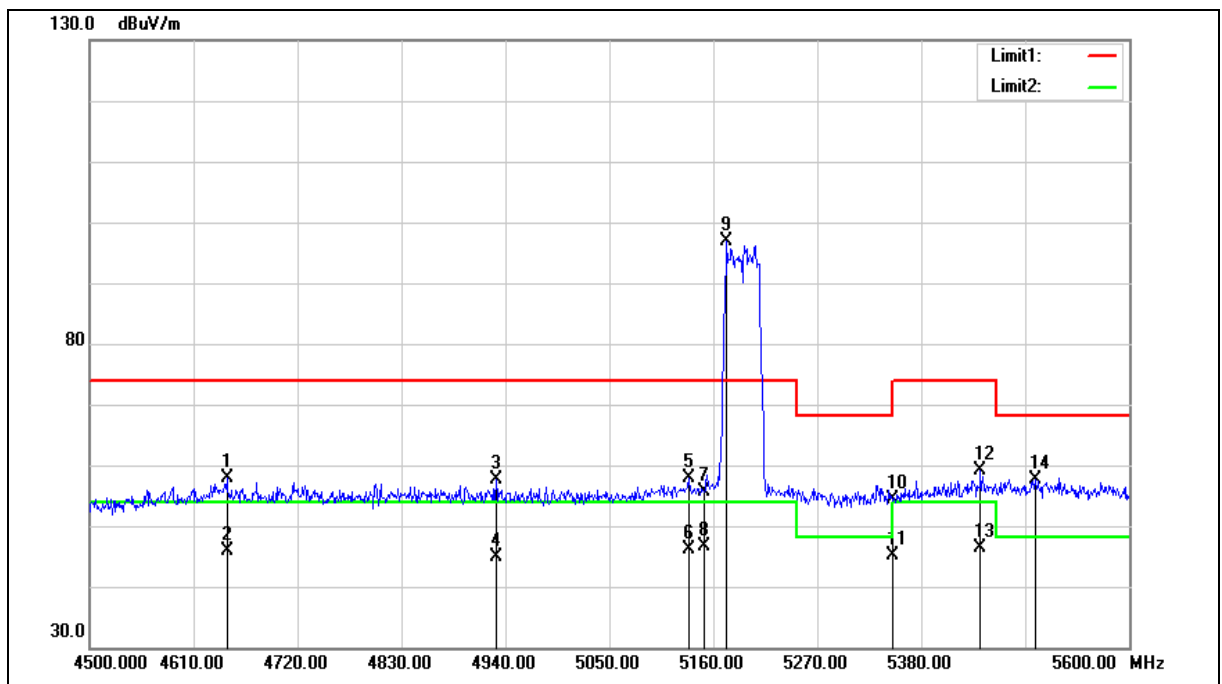

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5190 MHz	Temp.(°C)/Hum. (%RH):	26(°C)/60 %RH
Mode:	Mode 10		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4645.200	52.76	5.24	58.00	74.00	-16.00	peak
2	4645.200	40.61	5.24	45.85	54.00	-8.15	AVG
3	4930.100	51.81	5.78	57.59	74.00	-16.41	peak
4	4930.100	39.18	5.78	44.96	54.00	-9.04	AVG
5	5133.600	51.58	6.23	57.81	74.00	-16.19	peak
6	5133.600	39.83	6.23	46.06	54.00	-7.94	AVG
7	5150.000	49.40	6.27	55.67	74.00	-18.33	peak
8	5150.000	40.26	6.27	46.53	54.00	-7.47	AVG
9	5174.300	90.48	6.32	96.80	--	--	peak
10	5350.000	47.71	6.74	54.45	74.00	-19.55	peak
11	5350.000	38.40	6.74	45.14	54.00	-8.86	AVG
12	5442.700	52.14	6.97	59.11	74.00	-14.89	peak
13	5442.700	39.51	6.97	46.48	54.00	-7.52	AVG
14	5501.000	50.49	7.10	57.59	68.20	-10.61	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5190 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 10		
Ant.Polar.:	Vertical		

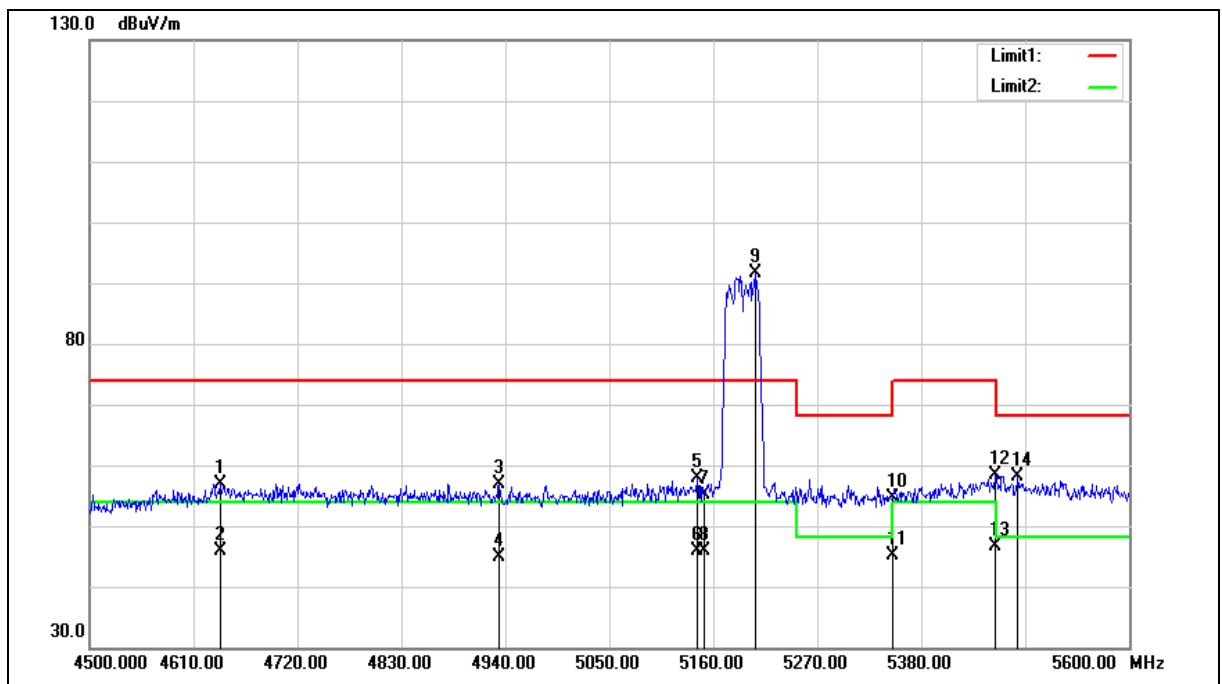

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5190 MHz	Temp.(°C)/Hum. (%RH):	26(°C)/60 %RH
Mode:	Mode 10		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4638.600	51.73	5.23	56.96	74.00	-17.04	peak
2	4638.600	40.64	5.23	45.87	54.00	-8.13	AVG
3	4933.400	51.17	5.79	56.96	74.00	-17.04	peak
4	4933.400	39.08	5.79	44.87	54.00	-9.13	AVG
5	5143.500	51.59	6.26	57.85	74.00	-16.15	peak
6	5143.500	39.60	6.26	45.86	54.00	-8.14	AVG
7	5150.000	48.86	6.27	55.13	74.00	-18.87	peak
8	5150.000	39.61	6.27	45.88	54.00	-8.12	AVG
9	5204.000	85.23	6.39	91.62	--	--	peak
10	5350.000	47.79	6.74	54.53	74.00	-19.47	peak
11	5350.000	38.40	6.74	45.14	54.00	-8.86	AVG
12	5458.100	51.27	7.00	58.27	74.00	-15.73	peak
13	5458.100	39.52	7.00	46.52	54.00	-7.48	AVG
14	5482.300	51.02	7.06	58.08	68.20	-10.12	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5310 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 10		
Ant.Polar.:	Horizontal		

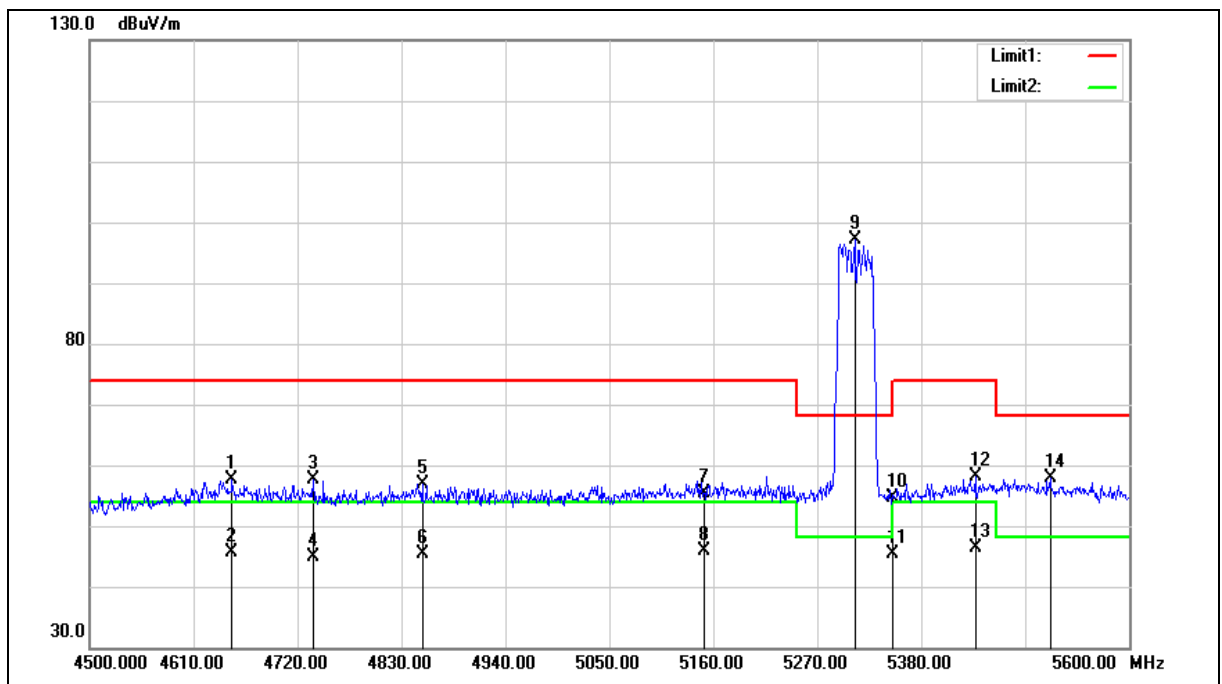

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5310 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 10		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4650.700	52.48	5.24	57.72	74.00	-16.28	peak
2	4650.700	40.45	5.24	45.69	54.00	-8.31	AVG
3	4736.500	52.28	5.40	57.68	74.00	-16.32	peak
4	4736.500	39.55	5.40	44.95	54.00	-9.05	AVG
5	4852.000	51.18	5.63	56.81	74.00	-17.19	peak
6	4852.000	39.68	5.63	45.31	54.00	-8.69	AVG
7	5150.000	49.13	6.27	55.40	74.00	-18.60	peak
8	5150.000	39.57	6.27	45.84	54.00	-8.16	AVG
9	5309.600	90.54	6.64	97.18	--	--	peak
10	5350.000	47.97	6.74	54.71	74.00	-19.29	peak
11	5350.000	38.64	6.74	45.38	54.00	-8.62	AVG
12	5437.200	51.17	6.95	58.12	74.00	-15.88	peak
13	5437.200	39.42	6.95	46.37	54.00	-7.63	AVG
14	5516.400	50.65	7.14	57.79	68.20	-10.41	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5310 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 10		
Ant.Polar.:	Vertical		

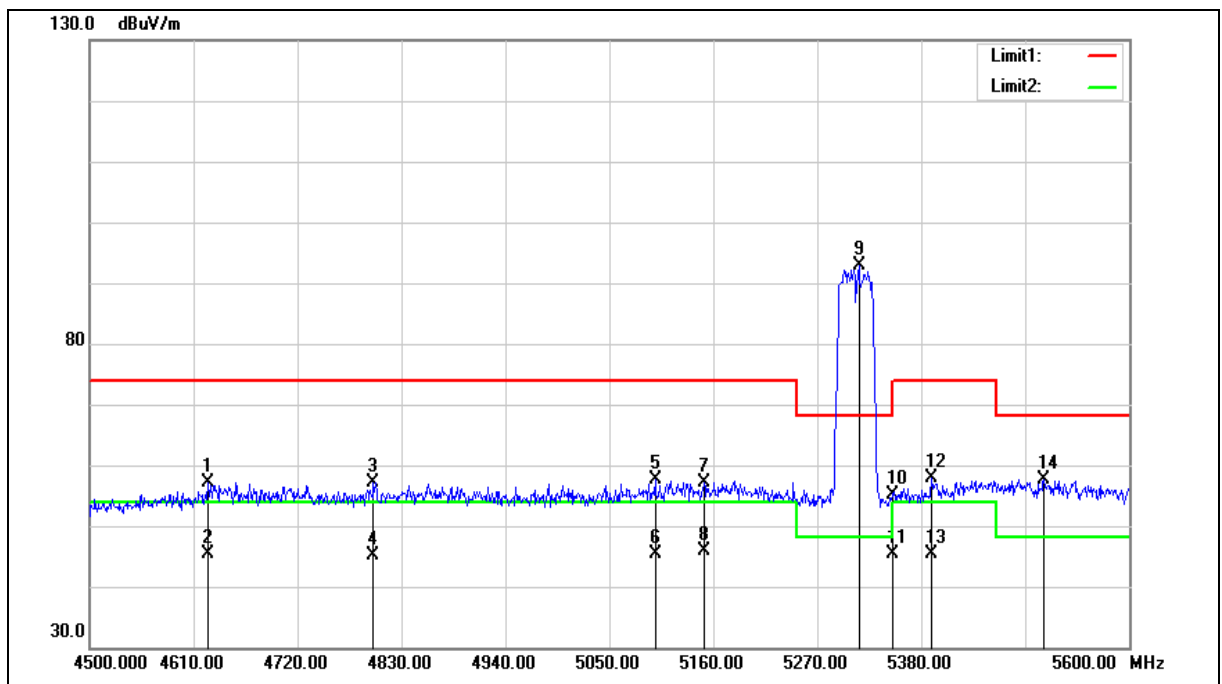

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5310 MHz	Temp.(°C)/Hum. (%RH):	26(°C)/60 %RH
Mode:	Mode 10		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4625.400	52.04	5.19	57.23	74.00	-16.77	peak
2	4625.400	40.07	5.19	45.26	54.00	-8.74	AVG
3	4800.300	51.68	5.53	57.21	74.00	-16.79	peak
4	4800.300	39.67	5.53	45.20	54.00	-8.80	AVG
5	5098.400	51.41	6.15	57.56	74.00	-16.44	peak
6	5098.400	39.32	6.15	45.47	54.00	-8.53	AVG
7	5150.000	50.83	6.27	57.10	74.00	-16.90	peak
8	5150.000	39.50	6.27	45.77	54.00	-8.23	AVG
9	5314.000	86.27	6.66	92.93	--	--	peak
10	5350.000	48.36	6.74	55.10	74.00	-18.90	peak
11	5350.000	38.61	6.74	45.35	54.00	-8.65	AVG
12	5391.000	50.96	6.84	57.80	74.00	-16.20	peak
13	5391.000	38.65	6.84	45.49	54.00	-8.51	AVG
14	5509.800	50.62	7.12	57.74	68.20	-10.46	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5510 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 10		
Ant.Polar.:	Horizontal		

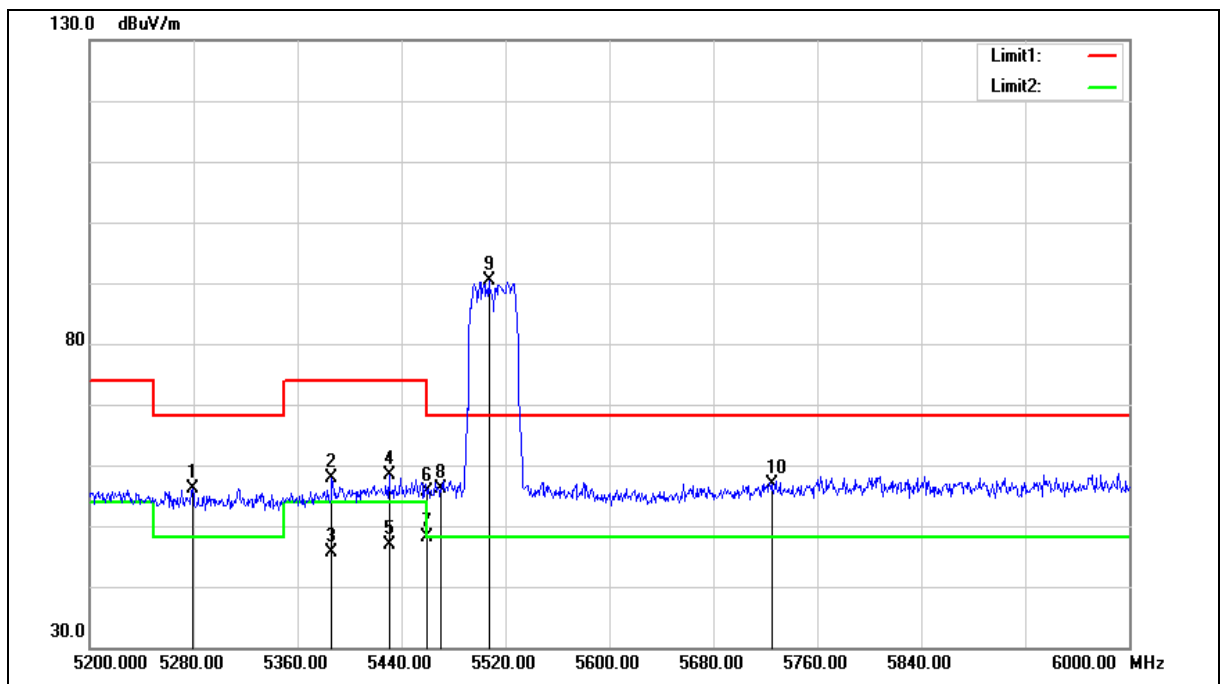

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5510 MHz	Temp.(°C)/Hum. (%RH):	26(°C)/60 %RH
Mode:	Mode 10		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5279.200	49.43	6.58	56.01	68.20	-12.19	peak
2	5386.400	50.96	6.82	57.78	74.00	-16.22	peak
3	5386.400	38.91	6.82	45.73	54.00	-8.27	AVG
4	5430.400	51.54	6.94	58.48	74.00	-15.52	peak
5	5430.400	39.93	6.94	46.87	54.00	-7.13	AVG
6	5460.000	48.57	7.00	55.57	74.00	-18.43	peak
7	5460.000	41.01	7.00	48.01	54.00	-5.99	AVG
8	5470.000	49.04	7.03	56.07	68.20	-12.13	peak
9	5507.200	83.36	7.11	90.47	--	--	peak
10	5725.000	49.41	7.57	56.98	68.20	-11.22	peak

Note: 1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5510 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 10		
Ant.Polar.:	Vertical		

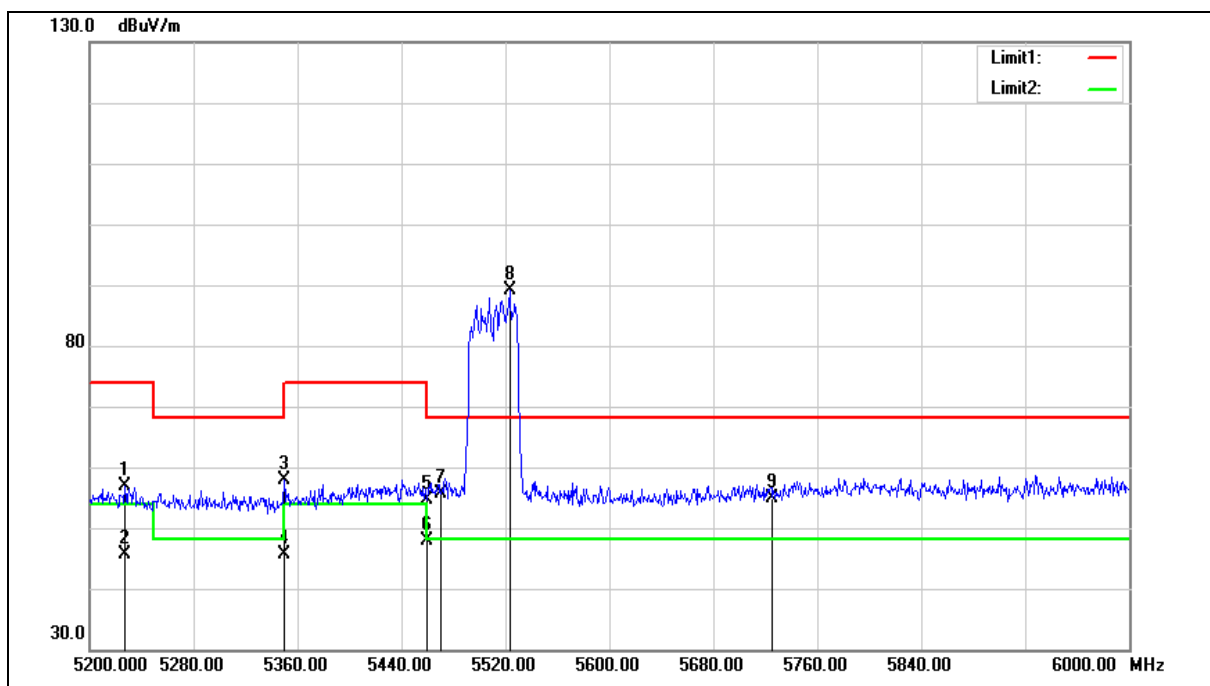

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5510 MHz	Temp.(°C)/Hum. (%RH):	26(°C)/60 %RH
Mode:	Mode 10		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5227.200	50.49	6.45	56.94	74.00	-17.06	peak
2	5227.200	39.26	6.45	45.71	54.00	-8.29	AVG
3	5349.600	51.12	6.74	57.86	68.20	-10.34	peak
4	5349.600	38.91	6.74	45.65	48.20	-2.55	AVG
5	5460.000	47.55	7.00	54.55	74.00	-19.45	peak
6	5460.000	40.89	7.00	47.89	54.00	-6.11	AVG
7	5470.000	48.69	7.03	55.72	68.20	-12.48	peak
8	5523.200	81.99	7.15	89.14	--	--	peak
9	5725.000	47.43	7.57	55.00	68.20	-13.20	peak

Note: 1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5670 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 10		
Ant.Polar.:	Horizontal		

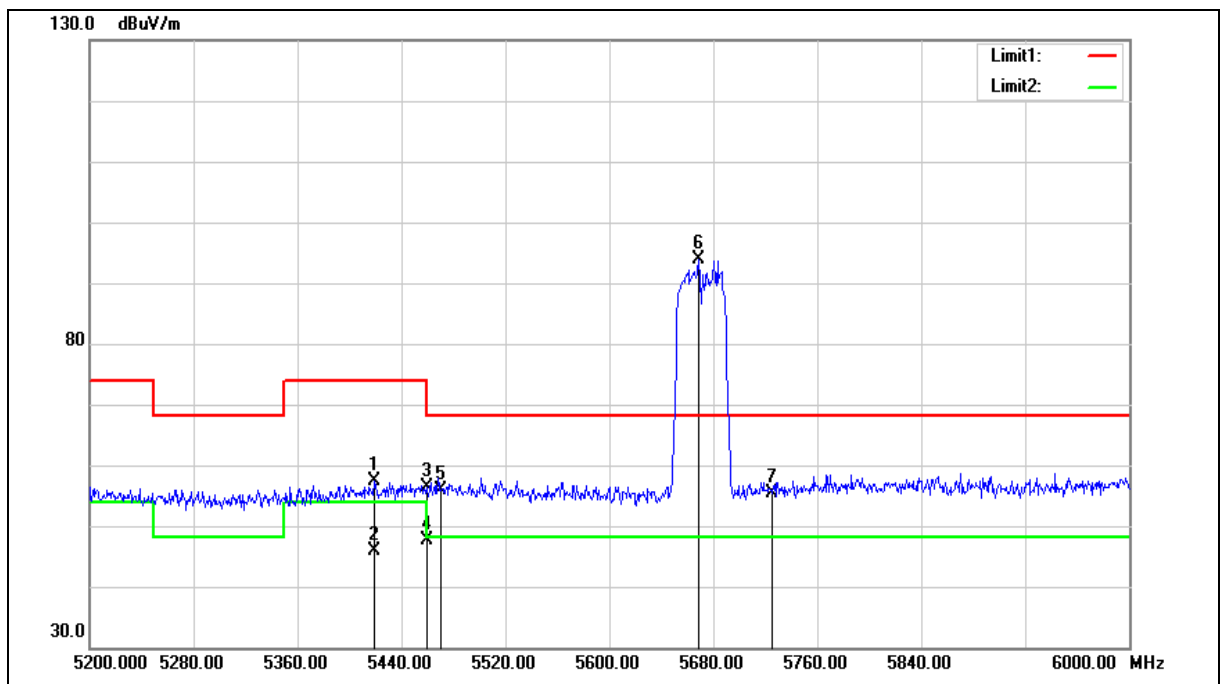

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5670 MHz	Temp.(°C)/Hum. (%RH):	26(°C)/60 %RH
Mode:	Mode 10		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5419.200	50.58	6.91	57.49	74.00	-16.51	peak
2	5419.200	39.06	6.91	45.97	54.00	-8.03	AVG
3	5460.000	49.30	7.00	56.30	74.00	-17.70	peak
4	5460.000	40.69	7.00	47.69	54.00	-6.31	AVG
5	5470.000	48.93	7.03	55.96	68.20	-12.24	peak
6	5668.800	86.33	7.45	93.78	--	--	peak
7	5725.000	47.73	7.57	55.30	68.20	-12.90	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5670 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 10		
Ant.Polar.:	Vertical		

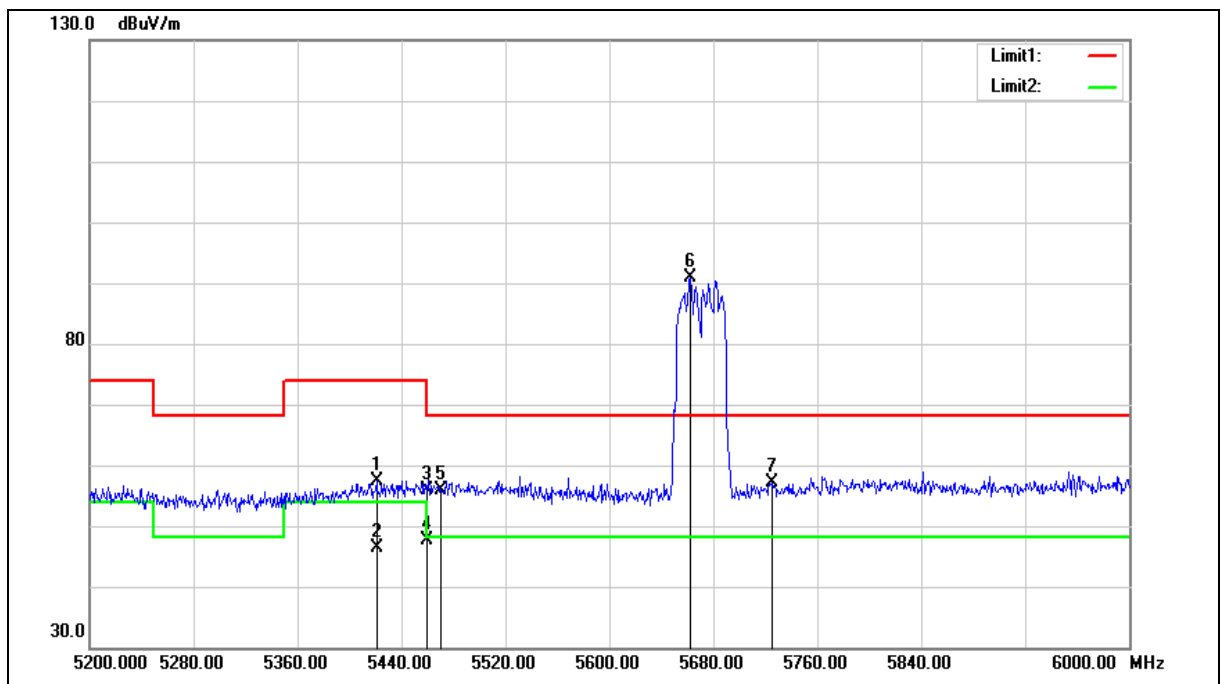

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5670 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 10		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5420.800	50.57	6.92	57.49	74.00	-16.51	peak
2	5420.800	39.40	6.92	46.32	54.00	-7.68	AVG
3	5460.000	48.78	7.00	55.78	74.00	-18.22	peak
4	5460.000	40.52	7.00	47.52	54.00	-6.48	AVG
5	5470.000	48.82	7.03	55.85	68.20	-12.35	peak
6	5662.400	83.46	7.44	90.90	--	--	peak
7	5725.000	49.55	7.57	57.12	68.20	-11.08	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5755 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 10		
Ant.Polar.:	Horizontal		

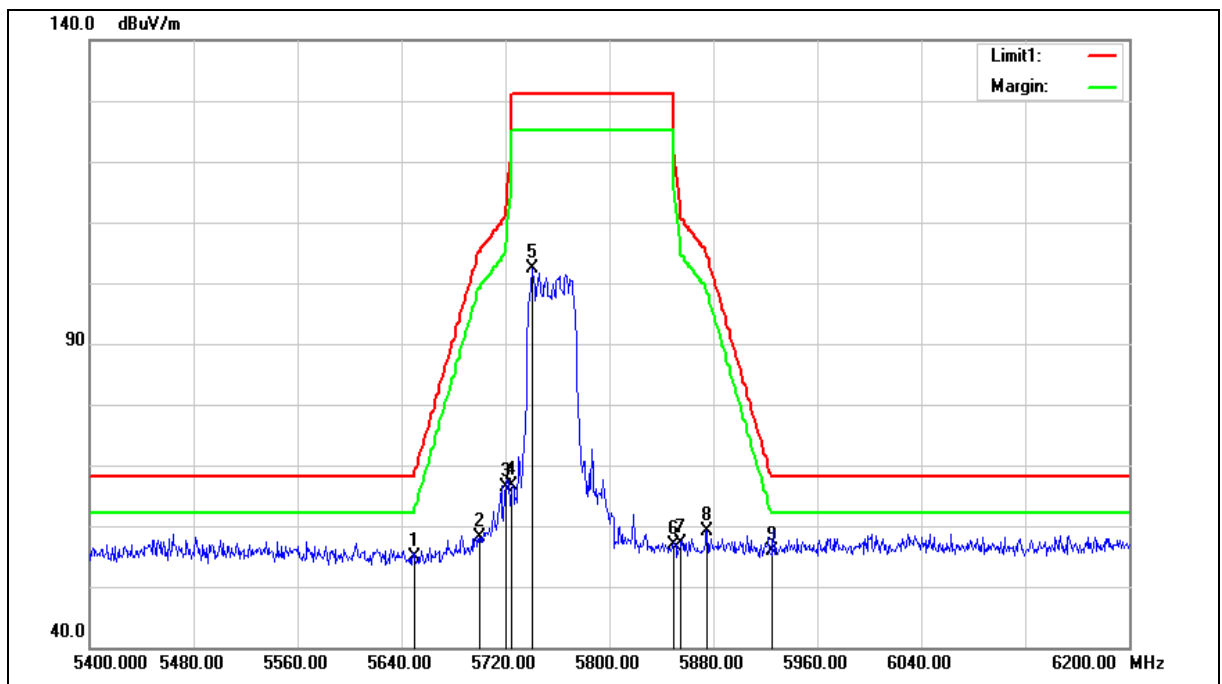

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5755 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 10		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5650.000	47.49	7.42	54.91	68.20	-13.29	peak
2	5700.000	50.65	7.52	58.17	105.20	-47.03	peak
3	5720.000	58.92	7.56	66.48	110.80	-44.32	peak
4	5725.000	59.10	7.57	66.67	122.20	-55.53	peak
5	5740.800	94.76	7.61	102.37	--	--	peak
6	5850.000	49.01	7.83	56.84	122.20	-65.36	peak
7	5855.000	49.37	7.85	57.22	110.80	-53.58	peak
8	5875.000	51.35	7.88	59.23	105.20	-45.97	peak
9	5925.000	47.84	8.00	55.84	68.20	-12.36	peak

Note: 1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5755 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 10		
Ant.Polar.:	Vertical		

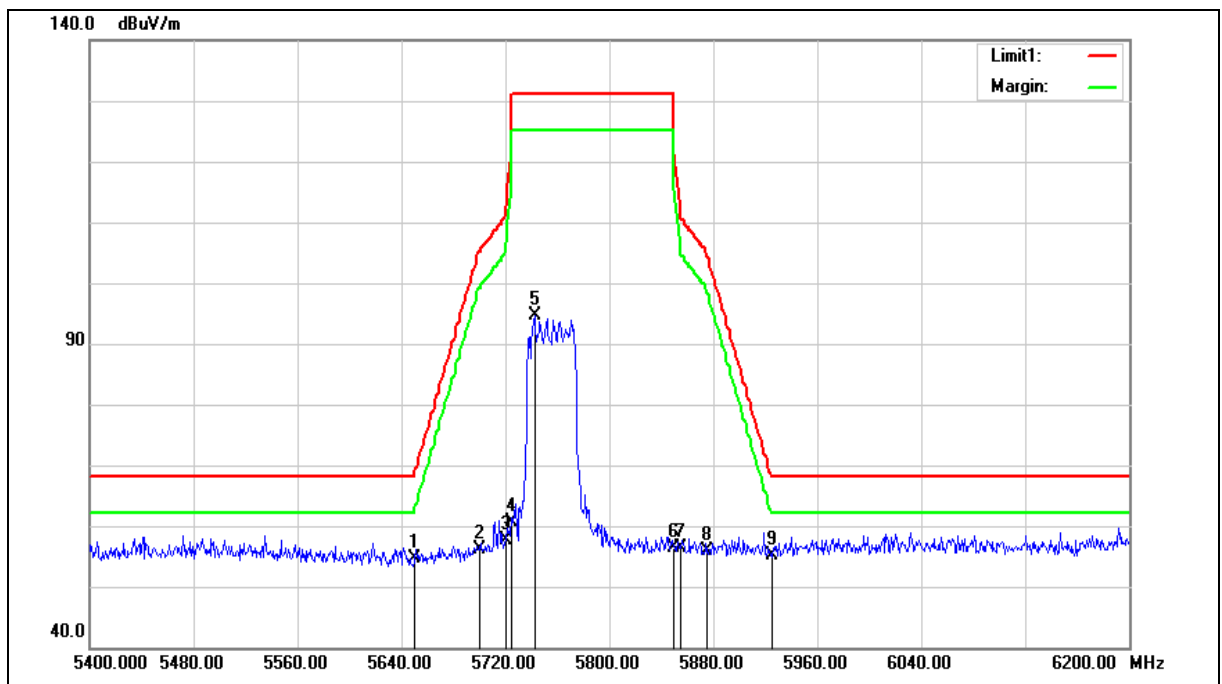

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5755 MHz	Temp.(°C)/Hum. (%RH):	26(°C)/60 %RH
Mode:	Mode 10		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5650.000	47.27	7.42	54.69	68.20	-13.51	peak
2	5700.000	48.66	7.52	56.18	105.20	-49.02	peak
3	5720.000	49.97	7.56	57.53	110.80	-53.27	peak
4	5725.000	52.97	7.57	60.54	122.20	-61.66	peak
5	5742.400	87.11	7.61	94.72	--	--	peak
6	5850.000	48.60	7.83	56.43	122.20	-65.77	peak
7	5855.000	48.57	7.85	56.42	110.80	-54.38	peak
8	5875.000	47.88	7.88	55.76	105.20	-49.44	peak
9	5925.000	47.11	8.00	55.11	68.20	-13.09	peak

Note: 1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5795 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 10		
Ant.Polar.:	Horizontal		

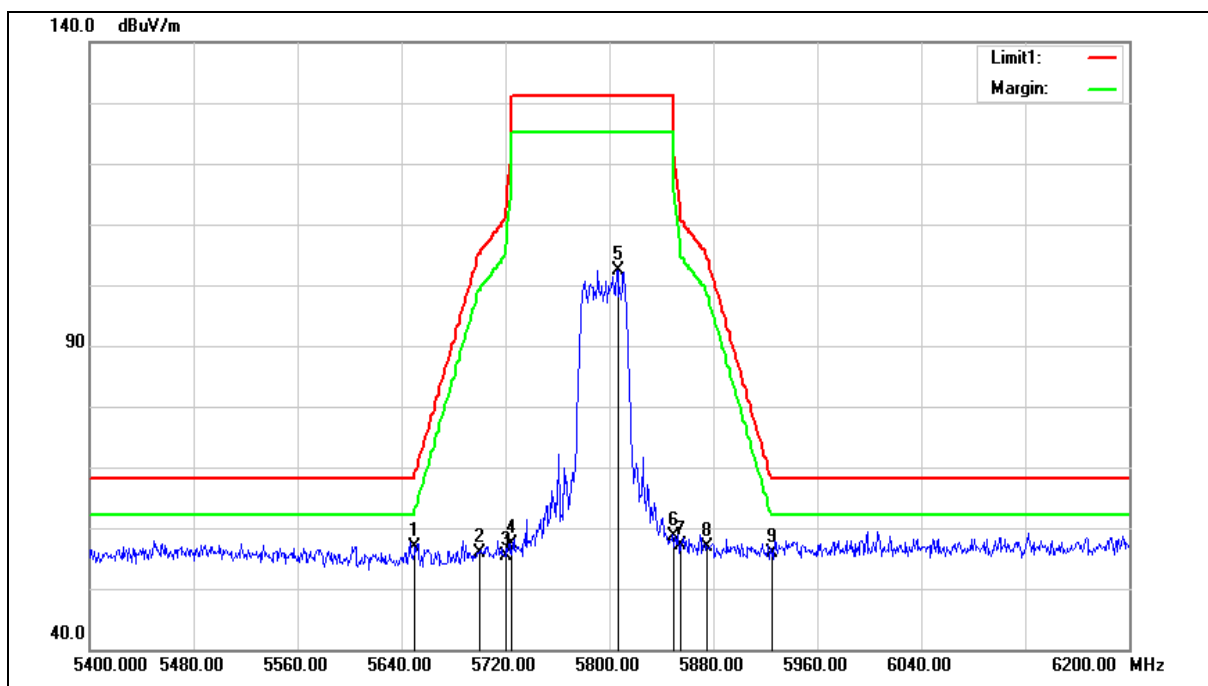

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5795 MHz	Temp.(°C)/Hum. (%RH):	26(°C)/60 %RH
Mode:	Mode 10		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5650.000	49.34	7.42	56.76	68.20	-11.44	peak
2	5700.000	48.29	7.52	55.81	105.20	-49.39	peak
3	5720.000	47.89	7.56	55.45	110.80	-55.35	peak
4	5725.000	49.70	7.57	57.27	122.20	-64.93	peak
5	5806.400	94.70	7.74	102.44	--	--	peak
6	5850.000	50.81	7.83	58.64	122.20	-63.56	peak
7	5855.000	49.19	7.85	57.04	110.80	-53.76	peak
8	5875.000	49.10	7.88	56.98	105.20	-48.22	peak
9	5925.000	47.82	8.00	55.82	68.20	-12.38	peak

Note: 1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5795 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 10		
Ant.Polar.:	Vertical		

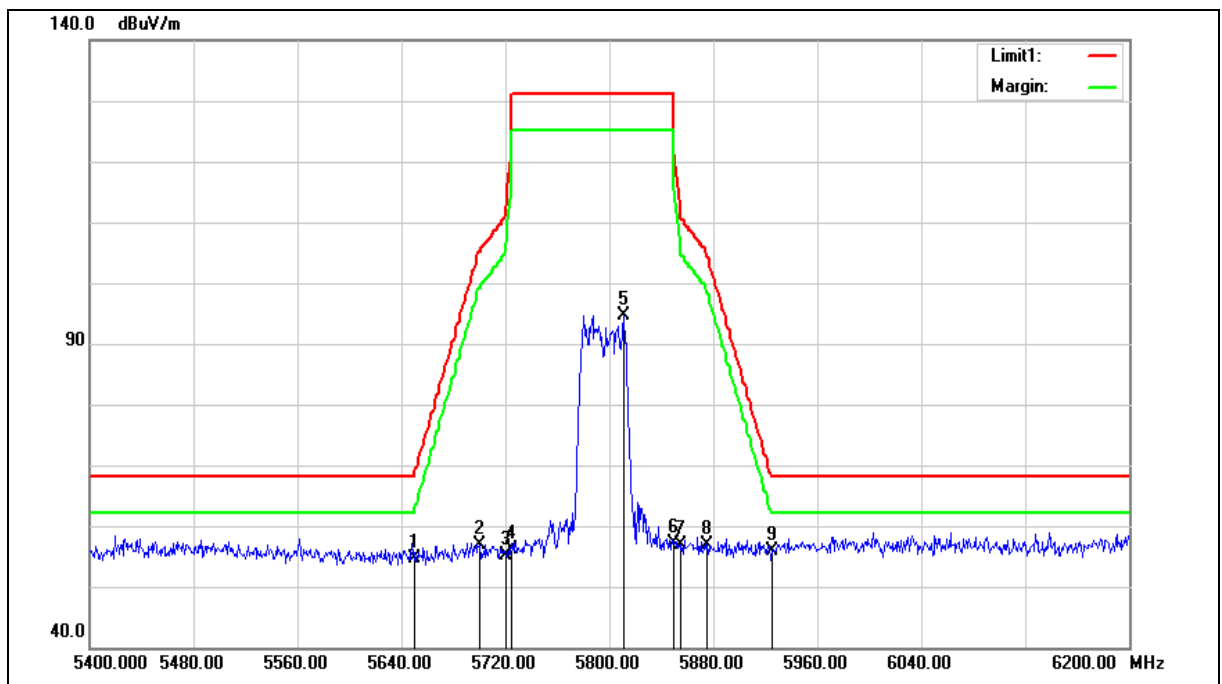

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5795 MHz	Temp.(°C)/Hum. (%RH):	26(°C)/60 %RH
Mode:	Mode 10		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5650.000	47.18	7.42	54.60	68.20	-13.60	peak
2	5700.000	49.32	7.52	56.84	105.20	-48.36	peak
3	5720.000	47.53	7.56	55.09	110.80	-55.71	peak
4	5725.000	48.57	7.57	56.14	122.20	-66.06	peak
5	5811.200	86.96	7.76	94.72	--	--	peak
6	5850.000	49.20	7.83	57.03	122.20	-65.17	peak
7	5855.000	49.11	7.85	56.96	110.80	-53.84	peak
8	5875.000	48.97	7.88	56.85	105.20	-48.35	peak
9	5925.000	47.89	8.00	55.89	68.20	-12.31	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5210 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 11		
Ant.Polar.:	Horizontal		

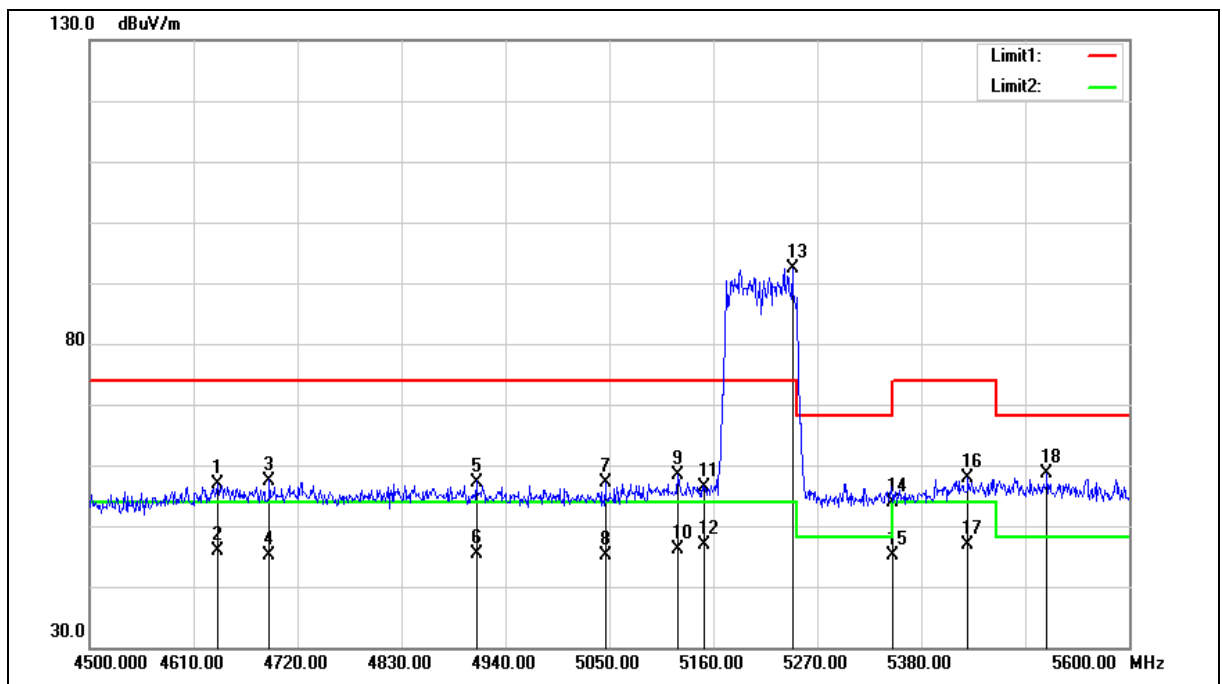

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5210 MHz	Temp.(°C)/Hum. (%RH):	26(°C)/60 %RH
Mode:	Mode 11		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4635.300	51.72	5.22	56.94	74.00	-17.06	peak
2	4635.300	40.63	5.22	45.85	54.00	-8.15	AVG
3	4690.300	52.19	5.31	57.50	74.00	-16.50	peak
4	4690.300	39.73	5.31	45.04	54.00	-8.96	AVG
5	4909.200	51.51	5.74	57.25	74.00	-16.75	peak
6	4909.200	39.61	5.74	45.35	54.00	-8.65	AVG
7	5045.600	51.21	6.02	57.23	74.00	-16.77	peak
8	5045.600	39.06	6.02	45.08	54.00	-8.92	AVG
9	5122.600	52.21	6.21	58.42	74.00	-15.58	peak
10	5122.600	39.80	6.21	46.01	54.00	-7.99	AVG
11	5150.000	50.06	6.27	56.33	74.00	-17.67	peak
12	5150.000	40.56	6.27	46.83	54.00	-7.17	AVG
13	5243.600	85.93	6.49	92.42	--	--	peak
14	5350.000	47.06	6.74	53.80	74.00	-20.20	peak
15	5350.000	38.42	6.74	45.16	54.00	-8.84	AVG
16	5429.500	50.86	6.93	57.79	74.00	-16.21	peak
17	5429.500	39.98	6.93	46.91	54.00	-7.09	AVG
18	5513.100	51.53	7.13	58.66	68.20	-9.54	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5210 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 11		
Ant.Polar.:	Vertical		

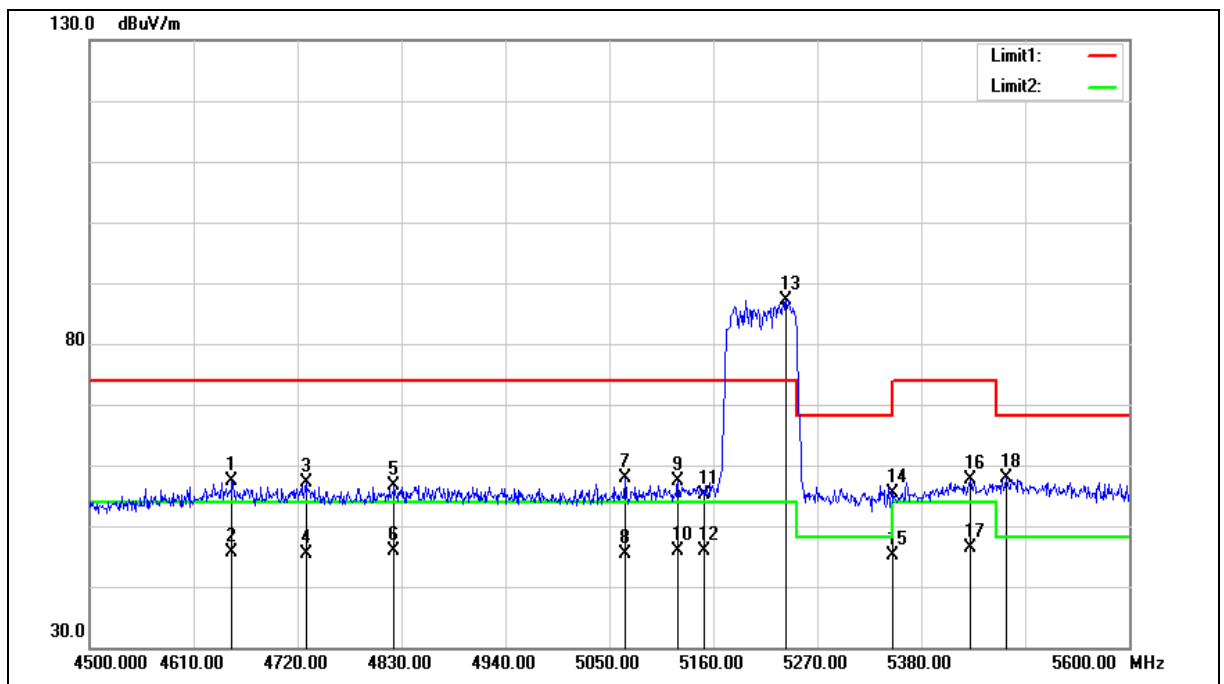

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5210 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 11		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4650.700	52.07	5.24	57.31	74.00	-16.69	peak
2	4650.700	40.39	5.24	45.63	54.00	-8.37	AVG
3	4728.800	51.81	5.40	57.21	74.00	-16.79	peak
4	4728.800	39.93	5.40	45.33	54.00	-8.67	AVG
5	4822.300	51.14	5.56	56.70	74.00	-17.30	peak
6	4822.300	40.33	5.56	45.89	54.00	-8.11	AVG
7	5066.500	51.69	6.07	57.76	74.00	-16.24	peak
8	5066.500	39.43	6.07	45.50	54.00	-8.50	AVG
9	5122.600	51.11	6.21	57.32	74.00	-16.68	peak
10	5122.600	39.71	6.21	45.92	54.00	-8.08	AVG
11	5150.000	48.96	6.27	55.23	74.00	-18.77	peak
12	5150.000	39.69	6.27	45.96	54.00	-8.04	AVG
13	5237.000	80.62	6.47	87.09	--	--	peak
14	5350.000	48.64	6.74	55.38	74.00	-18.62	peak
15	5350.000	38.45	6.74	45.19	54.00	-8.81	AVG
16	5431.700	50.67	6.94	57.61	74.00	-16.39	peak
17	5431.700	39.38	6.94	46.32	54.00	-7.68	AVG
18	5470.200	50.85	7.03	57.88	68.20	-10.32	peak

Note: 1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5290 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 11		
Ant.Polar.:	Horizontal		

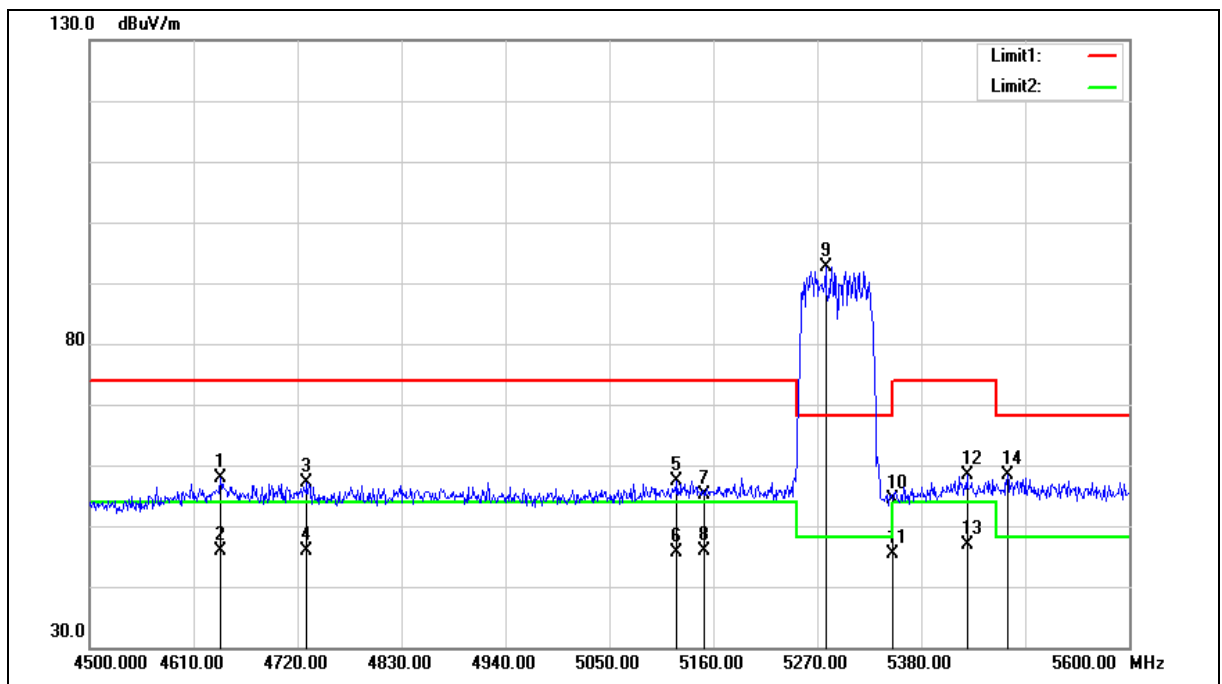

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5290 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 11		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4638.600	52.54	5.23	57.77	74.00	-16.23	peak
2	4638.600	40.63	5.23	45.86	54.00	-8.14	AVG
3	4729.900	51.75	5.39	57.14	74.00	-16.86	peak
4	4729.900	40.58	5.39	45.97	54.00	-8.03	AVG
5	5121.500	51.09	6.20	57.29	74.00	-16.71	peak
6	5121.500	39.54	6.20	45.74	54.00	-8.26	AVG
7	5150.000	48.74	6.27	55.01	74.00	-18.99	peak
8	5150.000	39.71	6.27	45.98	54.00	-8.02	AVG
9	5278.800	86.07	6.58	92.65	--	--	peak
10	5350.000	47.75	6.74	54.49	74.00	-19.51	peak
11	5350.000	38.72	6.74	45.46	54.00	-8.54	AVG
12	5428.400	51.55	6.93	58.48	74.00	-15.52	peak
13	5428.400	39.95	6.93	46.88	54.00	-7.12	AVG
14	5471.300	51.28	7.03	58.31	68.20	-9.89	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5290 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 11		
Ant.Polar.:	Vertical		

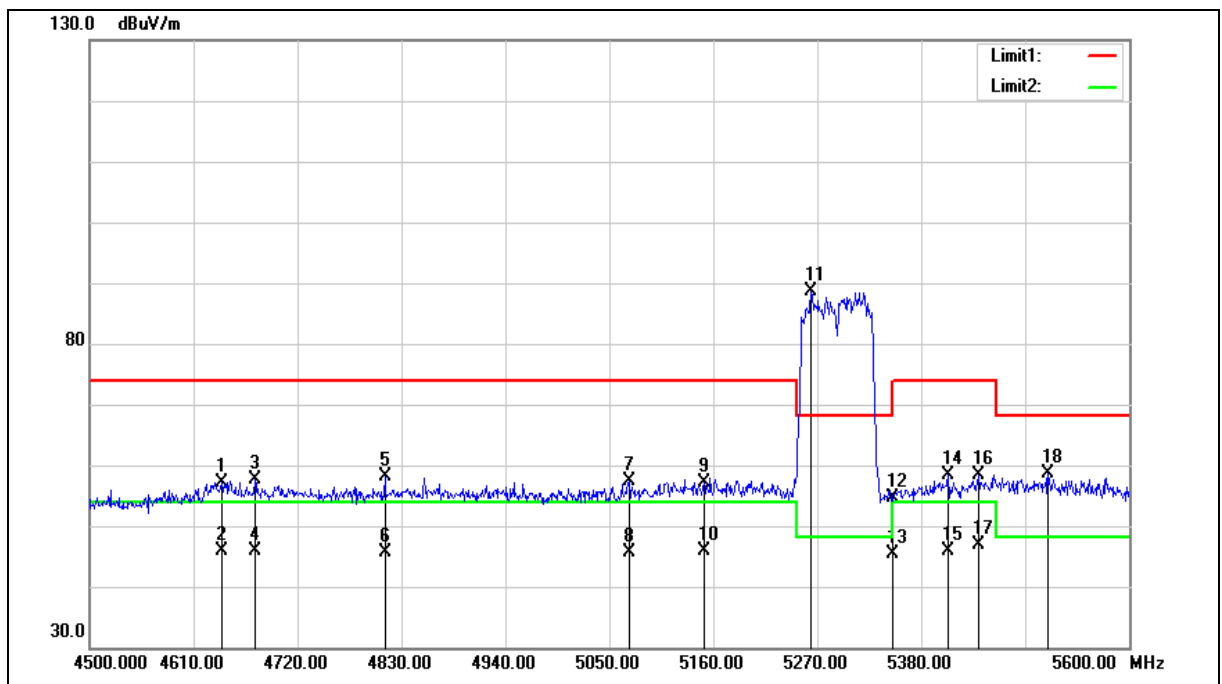

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5290 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 11		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4639.700	51.86	5.23	57.09	74.00	-16.91	peak
2	4639.700	40.75	5.23	45.98	54.00	-8.02	AVG
3	4674.900	52.42	5.29	57.71	74.00	-16.29	peak
4	4674.900	40.47	5.29	45.76	54.00	-8.24	AVG
5	4812.400	52.66	5.55	58.21	74.00	-15.79	peak
6	4812.400	40.19	5.55	45.74	54.00	-8.26	AVG
7	5070.900	51.31	6.08	57.39	74.00	-16.61	peak
8	5070.900	39.62	6.08	45.70	54.00	-8.30	AVG
9	5150.000	50.80	6.27	57.07	74.00	-16.93	peak
10	5150.000	39.70	6.27	45.97	54.00	-8.03	AVG
11	5263.400	82.04	6.55	88.59	--	--	peak
12	5350.000	47.87	6.74	54.61	74.00	-19.39	peak
13	5350.000	38.61	6.74	45.35	54.00	-8.65	AVG
14	5408.600	51.60	6.87	58.47	74.00	-15.53	peak
15	5408.600	39.01	6.87	45.88	54.00	-8.12	AVG
16	5440.500	51.33	6.97	58.30	74.00	-15.70	peak
17	5440.500	39.99	6.97	46.96	54.00	-7.04	AVG
18	5514.200	51.42	7.13	58.55	68.20	-9.65	peak

Note: 1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5530 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 11		
Ant.Polar.:	Horizontal		

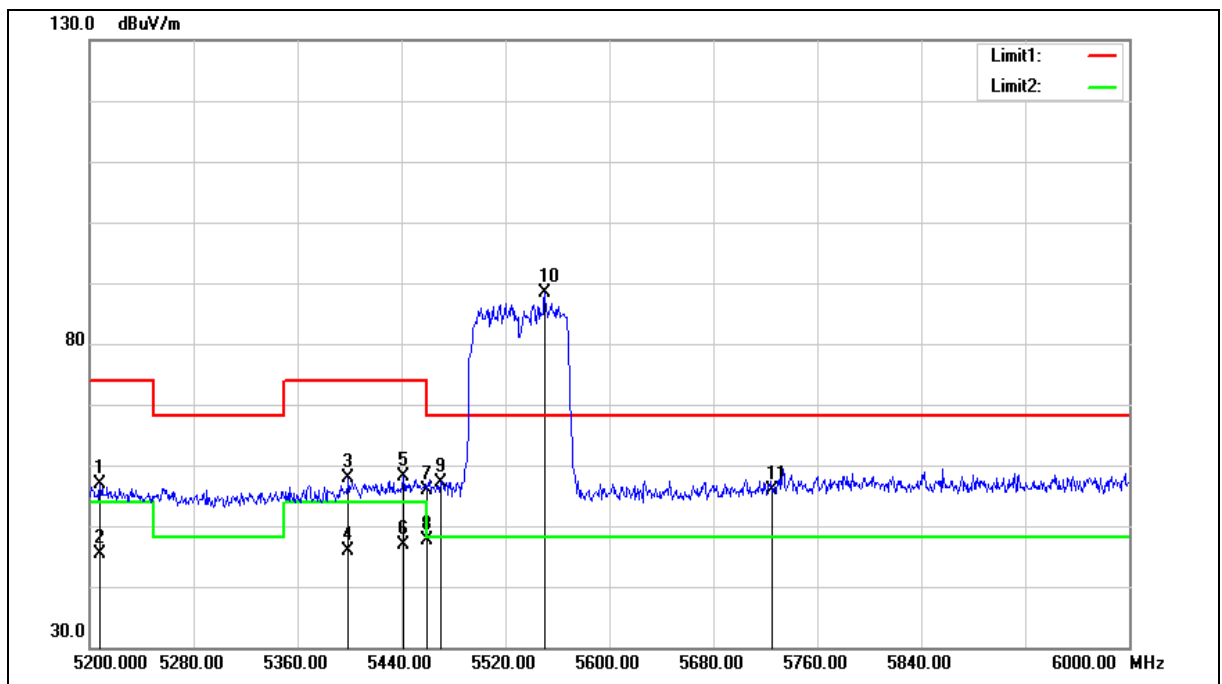

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5530 MHz	Temp.(°C)/Hum. (%RH):	26(°C)/60 %RH
Mode:	Mode 11		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5208.000	50.51	6.40	56.91	74.00	-17.09	peak
2	5208.000	39.04	6.40	45.44	54.00	-8.56	AVG
3	5399.200	50.91	6.86	57.77	74.00	-16.23	peak
4	5399.200	38.90	6.86	45.76	54.00	-8.24	AVG
5	5441.600	51.26	6.97	58.23	74.00	-15.77	peak
6	5441.600	39.88	6.97	46.85	54.00	-7.15	AVG
7	5460.000	48.90	7.00	55.90	74.00	-18.10	peak
8	5460.000	40.73	7.00	47.73	54.00	-6.27	AVG
9	5470.000	49.99	7.03	57.02	68.20	-11.18	peak
10	5550.400	81.15	7.20	88.35	--	--	peak
11	5725.000	48.25	7.57	55.82	68.20	-12.38	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5530 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 11		
Ant.Polar.:	Vertical		

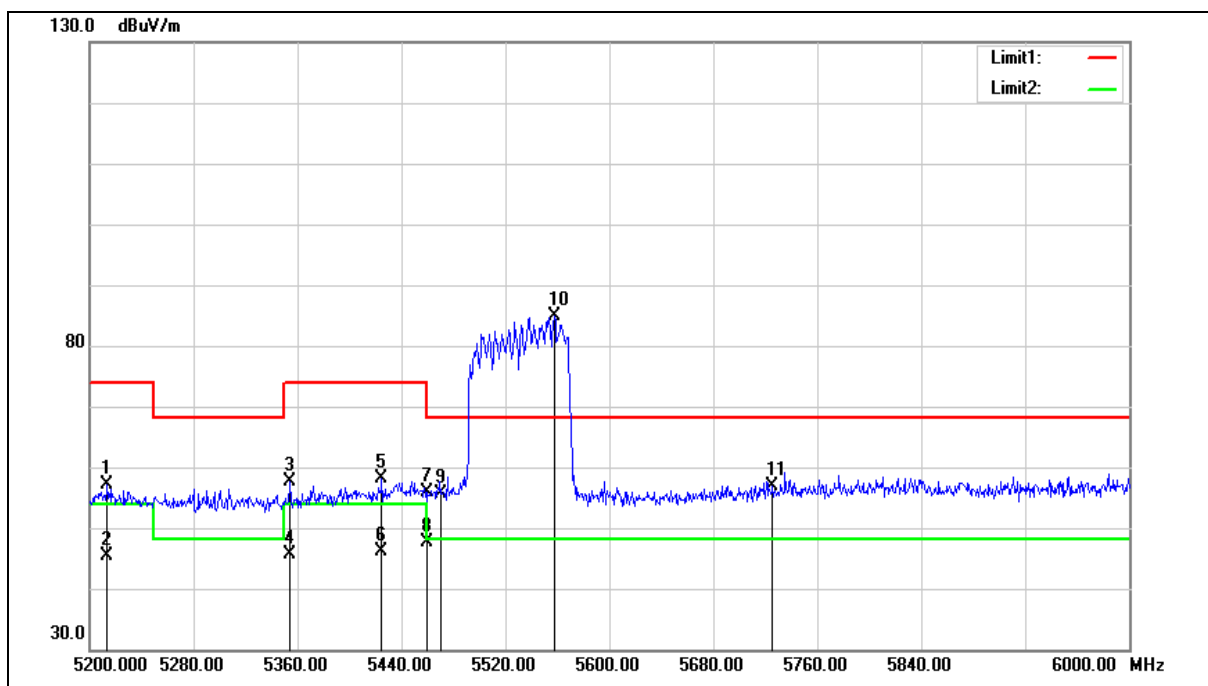

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5530 MHz	Temp.(°C)/Hum. (%RH):	26(°C)/60 %RH
Mode:	Mode 11		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5213.600	50.79	6.42	57.21	74.00	-16.79	peak
2	5213.600	38.95	6.42	45.37	54.00	-8.63	AVG
3	5354.400	50.97	6.75	57.72	74.00	-16.28	peak
4	5354.400	38.92	6.75	45.67	54.00	-8.33	AVG
5	5424.800	51.23	6.93	58.16	74.00	-15.84	peak
6	5424.800	39.24	6.93	46.17	54.00	-7.83	AVG
7	5460.000	48.90	7.00	55.90	74.00	-18.10	peak
8	5460.000	40.57	7.00	47.57	54.00	-6.43	AVG
9	5470.000	48.71	7.03	55.74	68.20	-12.46	peak
10	5557.600	77.75	7.22	84.97	--	--	peak
11	5725.000	49.40	7.57	56.97	68.20	-11.23	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5775 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 11		
Ant.Polar.:	Horizontal		

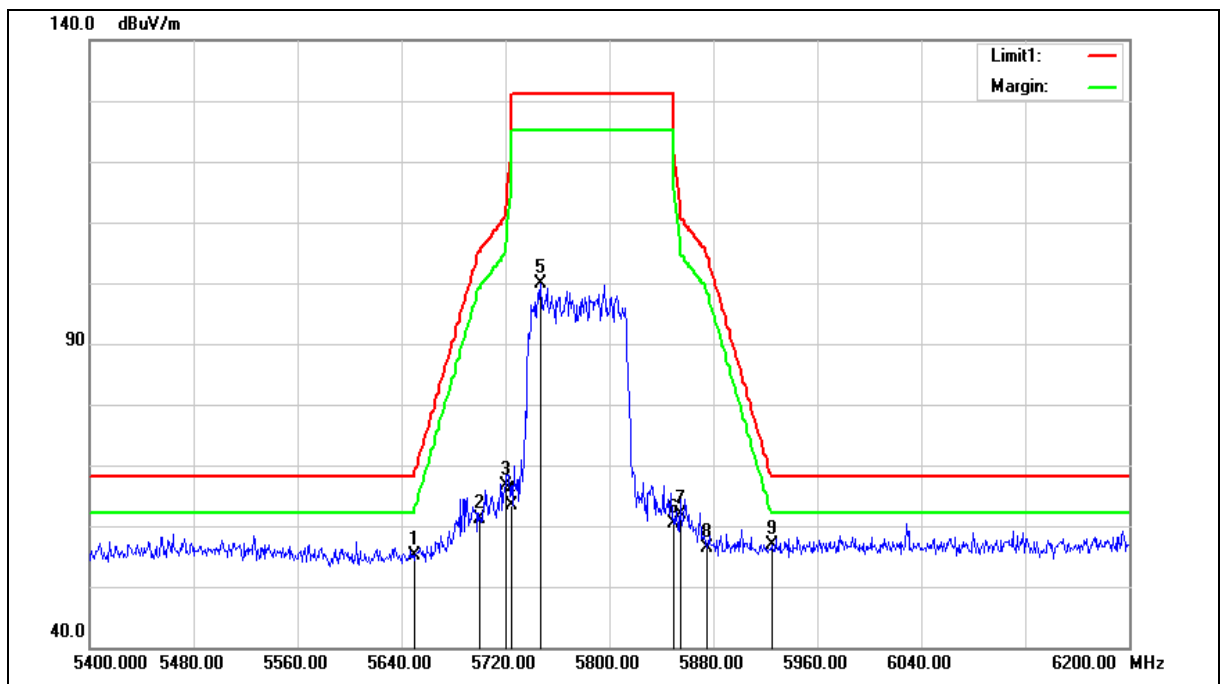

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5775 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 11		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5650.000	47.72	7.42	55.14	68.20	-13.06	peak
2	5700.000	53.69	7.52	61.21	105.20	-43.99	peak
3	5720.000	59.05	7.56	66.61	110.80	-44.19	peak
4	5725.000	55.87	7.57	63.44	122.20	-58.76	peak
5	5747.200	92.18	7.62	99.80	--	--	peak
6	5850.000	52.48	7.83	60.31	122.20	-61.89	peak
7	5855.000	54.01	7.85	61.86	110.80	-48.94	peak
8	5875.000	48.57	7.88	56.45	105.20	-48.75	peak
9	5925.000	48.98	8.00	56.98	68.20	-11.22	peak

Note: 1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5775 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 11		
Ant.Polar.:	Vertical		

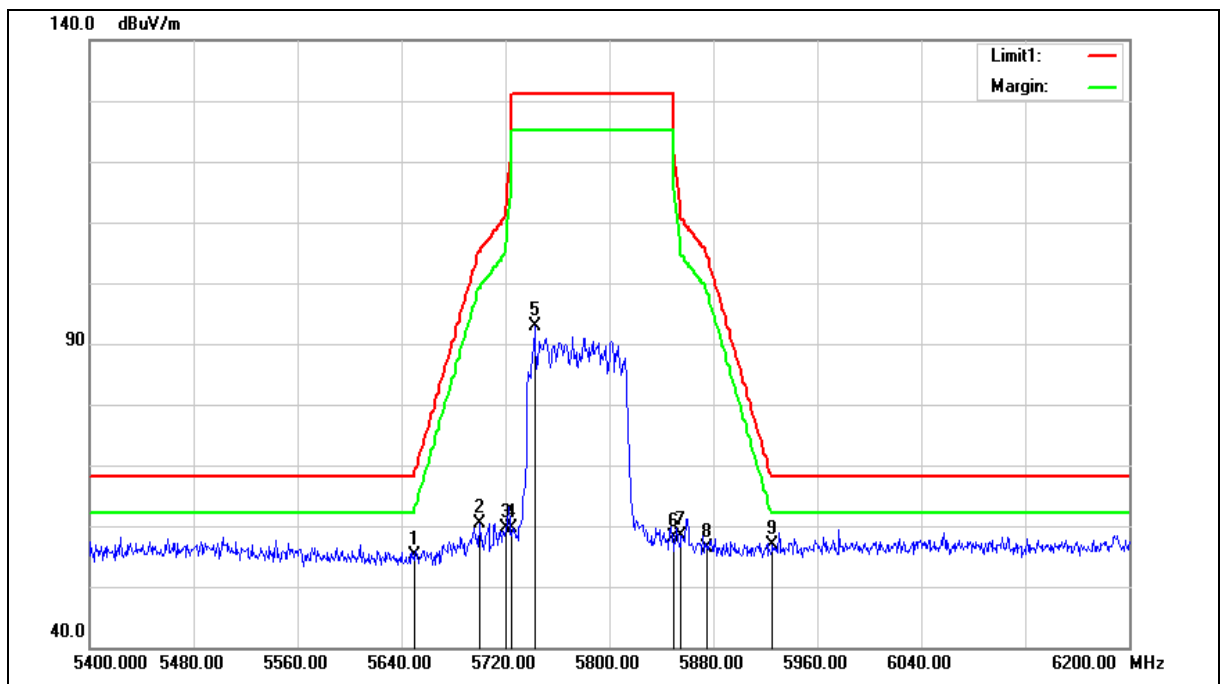

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5775 MHz	Temp.(°C)/Hum. (%RH):	26(°C)/60 %RH
Mode:	Mode 11		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5650.000	47.66	7.42	55.08	68.20	-13.12	peak
2	5700.000	52.75	7.52	60.27	105.20	-44.93	peak
3	5720.000	52.16	7.56	59.72	110.80	-51.08	peak
4	5725.000	52.09	7.57	59.66	122.20	-62.54	peak
5	5742.400	85.17	7.61	92.78	--	--	peak
6	5850.000	50.22	7.83	58.05	122.20	-64.15	peak
7	5855.000	50.51	7.85	58.36	110.80	-52.44	peak
8	5875.000	48.60	7.88	56.48	105.20	-48.72	peak
9	5925.000	48.83	8.00	56.83	68.20	-11.37	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5250 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 12		
Ant.Polar.:	Horizontal		

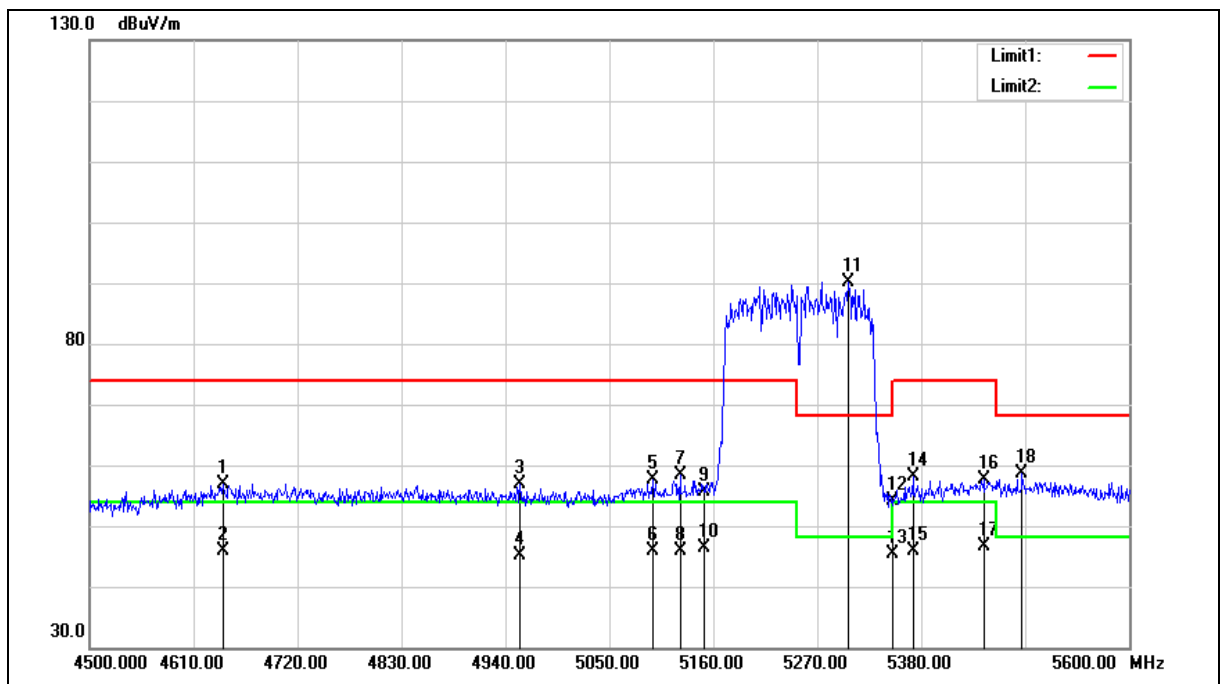

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5250 MHz	Temp.(°C)/Hum. (%RH):	26(°C)/60 %RH
Mode:	Mode 12		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4640.800	51.54	5.23	56.77	74.00	-17.23	peak
2	4640.800	40.65	5.23	45.88	54.00	-8.12	AVG
3	4955.400	50.99	5.82	56.81	74.00	-17.19	peak
4	4955.400	39.33	5.82	45.15	54.00	-8.85	AVG
5	5096.200	51.47	6.14	57.61	74.00	-16.39	peak
6	5096.200	39.74	6.14	45.88	54.00	-8.12	AVG
7	5124.800	52.26	6.21	58.47	74.00	-15.53	peak
8	5124.800	39.78	6.21	45.99	54.00	-8.01	AVG
9	5150.000	49.45	6.27	55.72	74.00	-18.28	peak
10	5150.000	40.11	6.27	46.38	54.00	-7.62	AVG
11	5303.000	83.56	6.63	90.19	--	--	peak
12	5350.000	47.29	6.74	54.03	74.00	-19.97	peak
13	5350.000	38.63	6.74	45.37	54.00	-8.63	AVG
14	5371.200	51.36	6.79	58.15	74.00	-15.85	peak
15	5371.200	39.03	6.79	45.82	54.00	-8.18	AVG
16	5446.000	50.67	6.98	57.65	74.00	-16.35	peak
17	5446.000	39.56	6.98	46.54	54.00	-7.46	AVG
18	5486.700	51.60	7.06	58.66	68.20	-9.54	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5250 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 12		
Ant.Polar.:	Vertical		

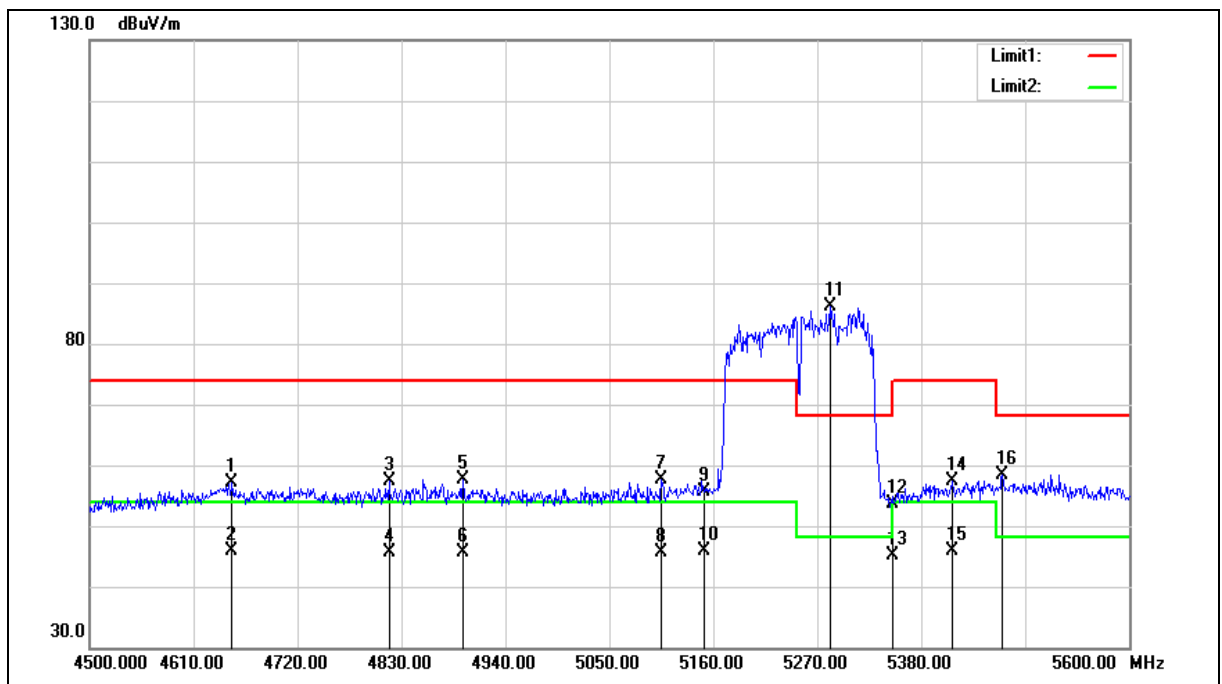

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5250 MHz	Temp.(°C)/Hum. (%RH):	26(°C)/60 %RH
Mode:	Mode 12		
Ant.Polar.:	Vertical		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4650.700	51.77	5.24	57.01	74.00	-16.99	peak
2	4650.700	40.53	5.24	45.77	54.00	-8.23	AVG
3	4816.800	51.80	5.55	57.35	74.00	-16.65	peak
4	4816.800	39.99	5.55	45.54	54.00	-8.46	AVG
5	4894.900	51.88	5.71	57.59	74.00	-16.41	peak
6	4894.900	39.80	5.71	45.51	54.00	-8.49	AVG
7	5105.000	51.56	6.16	57.72	74.00	-16.28	peak
8	5105.000	39.36	6.16	45.52	54.00	-8.48	AVG
9	5150.000	49.34	6.27	55.61	74.00	-18.39	peak
10	5150.000	39.60	6.27	45.87	54.00	-8.13	AVG
11	5283.200	79.63	6.58	86.21	--	--	peak
12	5350.000	47.01	6.74	53.75	74.00	-20.25	peak
13	5350.000	38.50	6.74	45.24	54.00	-8.76	AVG
14	5413.000	50.56	6.89	57.45	74.00	-16.55	peak
15	5413.000	39.07	6.89	45.96	54.00	-8.04	AVG
16	5465.800	51.36	7.02	58.38	68.20	-9.82	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

4.3.2 最大傳導輸出功率之量測

合格標準:

依據 NCC 低功率射頻電機技術規範(LP0002)之 4.7.3 節之要求:

1. 5.15-5.25 GHz 頻帶

(1) 供戶外操作使用:

- 最大傳導輸出功率不能超過 1 W。
- 在任何 1MHz 頻帶中最大功率頻譜密度不能超過 17 dBm。
- 使用超過 6 dBi 方向增益之發射天線時，應依超過 6 dBi 天線方向增益的 dBi 總量，等量減少最大傳導輸出功率及最大功率頻譜密度。
- 在水平面仰角超過 30 度時，其最大 EIRP 不能超過 21dBm。

(2) 供室內操作使用:

- 最大傳導輸出功率不能超過 1 W。
- 在任何 1MHz 頻帶中最大功率頻譜密度不能超過 17 dBm。
- 使用超過 6 dBi 方向增益之發射天線時，應依超過 6 dBi 天線方向增益的 dBi 總量，等量減少最大傳導輸出功率及最大功率頻譜密度。

(3) 供固定式點對點操作使用:

- 最大傳導輸出功率不能超過 1 W。
- 在任何 1MHz 頻帶中最大功率頻譜密度不能超過 17 dBm。
- 使用超過 23dBi 方向增益之指向性天線時，應依超過 23dBi 天線方向增益的 dBi 總量，等量減少最大傳導輸出功率及最大功率頻譜密度。
- 固定式點對點操作，不包括點對多點系統、全方向性應用及多台共站發射機傳送相同資訊。

(4) 供行動或可攜式裝置操作使用:

- 最大傳導輸出功率不能超過 250 mW。
- 在任何 1MHz 頻帶中最大功率頻譜密度不能超過 11dBm。
- 使用超過 6 dBi 方向增益之發射天線時，應依超過 6 dBi 天線方向增益的 dBi 總量，等量減少最大傳導輸出功率及最大功率頻譜密度。

2. 5.25-5.35 GHz 與 5.470-5.725GHz 頻帶

- (1) 最大傳導輸出功率不能超過 250 mW 或 $11 \text{ dBm} + 10 \log B$ (B 是 26 dB 發射頻寬，單位 MHz)之較小者。
- (2) 最大功率頻譜密度在任何 1 MHz 頻帶中不能超過 11 dBm。
- (3) 使用超過 6 dBi 方向增益之發射天線時，應依超過 6 dBi 天線方向增益的 dBi 總量，等量減少最大傳導輸出功率及最大功率頻譜密度。

3. 5.725-5.850 GHz 頻帶

- (1) 最大傳導輸出功率不能超過 1 W。
- (2) 在任何 500 kHz 頻帶中最大功率頻譜密度不能超過 30 dBm。
- (3) 供固定式點對點操作時，使用方向增益超過 6 dBi 之發射天線，可不需對應減少發射器之傳導輸出功率限制值。
- (4) 除(3)外，使用超過 6 dBi 方向增益之發射天線時，應依超過 6 dBi 天線方向增益的 dBi 總量，等量減少最大傳導輸出功率及最大功率頻譜密度。

4. 最大傳導輸出功率必須使用依據均方根等效電壓校準之儀器量測於任何連續傳輸之時段，量測結果須依儀器限制（如偵測器反應時間、相較於發射頻寬有限之解析頻寬能力，靈敏度等）調整得出正確之峰值量測，以符合本段落所提之發射定義。

IEEE 802.11a


$$* \text{ Directional Gain} = G_{\text{ANT}} = 10 * \log\{[10^{(G1/10)} + 10^{(G2/10)} + \dots + 10^{(Gn/10)}] / N\} = -1.41 \text{ dBi} < 6 \text{ dBi}$$

IEEE 802.11n 5 GHz 20 MHz / IEEE 802.11n 5 GHz 40 MHz / IEEE 802.11ac 20 MHz / IEEE 802.11ac 40 MHz /

IEEE 802.11ac 80 MHz / IEEE 802.11ac 160 MHz

$$* \text{ Directional Gain} = 10 * \log\{[10^{(G1/20)} + 10^{(G2/20)} + \dots + 10^{(Gn/20)}]^2 / N\} = 1.58 \text{ dBi} < 6 \text{ dBi}$$

測試架構圖：

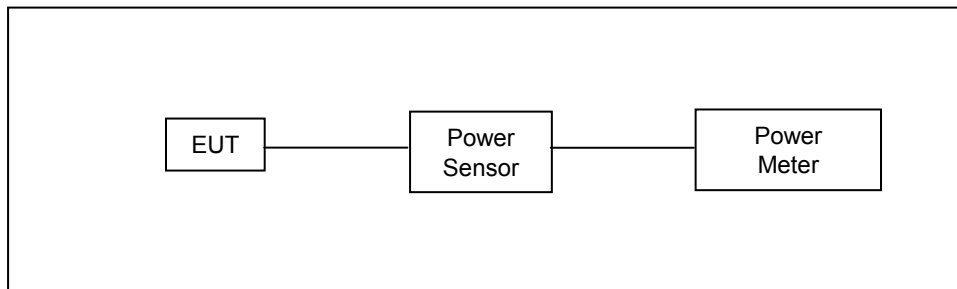

測試結果:

操作模式：Mode 6 / Mode 7 / Mode 8 / Mode 9 / Mode 10 / Mode 11 / Mode 12										
測試結果：合格										
操作模式	頻道 CH	頻率 MHz	Data Rate (Mbps)	最大傳導輸出功率						
				量測值						限制值
				ANT-0		ANT-1		ANT-0+1		
				dBm	W	dBm	W	dBm	W	
Mode 6	36	5180.0	6	14.06	0.025	12.02	0.016	16.17	0.041	≤ 24.00
	40	5200.0		16.88	0.049	15.65	0.037	19.32	0.085	≤ 24.00
	44	5220.0		16.95	0.050	15.40	0.035	19.25	0.084	≤ 24.00
	48	5240.0		17.17	0.052	15.34	0.034	19.36	0.086	≤ 24.00
	52	5260.0		17.38	0.055	15.46	0.035	19.54	0.090	≤ 24.00
	56	5280.0		16.76	0.047	15.24	0.033	19.08	0.081	≤ 24.00
	60	5300.0		17.14	0.052	14.79	0.030	19.13	0.082	≤ 24.00
	64	5320.0		13.46	0.022	11.40	0.014	15.56	0.036	≤ 24.00
	100	5500.0		8.99	0.008	7.90	0.006	11.49	0.014	≤ 24.00
	104	5520.0		17.06	0.051	16.09	0.041	19.61	0.091	≤ 24.00
	108	5540.0		16.94	0.049	16.29	0.043	19.64	0.092	≤ 24.00
	112	5560.0		16.99	0.050	16.17	0.041	19.61	0.091	≤ 24.00
	116	5580.0		17.00	0.050	15.85	0.038	19.47	0.089	≤ 24.00
	132	5660.0		17.06	0.051	15.60	0.036	19.40	0.087	≤ 24.00
	136	5680.0		17.22	0.053	15.65	0.037	19.52	0.089	≤ 24.00
	140	5700.0		9.17	0.008	6.75	0.005	11.14	0.013	≤ 24.00
	149	5745.0		16.68	0.047	16.05	0.040	19.39	0.087	≤ 30.00
	153	5765.0		16.78	0.048	16.25	0.042	19.53	0.090	≤ 30.00
	157	5785.0		16.72	0.047	15.97	0.040	19.37	0.087	≤ 30.00
	161	5805.0		16.44	0.044	15.62	0.036	19.06	0.081	≤ 30.00
	165	5825.0		16.64	0.046	15.78	0.038	19.24	0.084	≤ 30.00

操作模式：Mode 6 / Mode 7 / Mode 8 / Mode 9 / Mode 10 / Mode 11 / Mode 12										
測試結果：合格										
操作模式	頻道 CH	頻率 MHz	Data Rate (Mbps)	最大傳導輸出功率						
				量測值						限制值
				ANT-0		ANT-1		ANT-0+1		
				dBm	W	dBm	W	dBm	W	
Mode 7	36	5180.0	13	13.67	0.023	12.12	0.016	15.97	0.040	≤ 24.00
	40	5200.0		15.91	0.039	14.35	0.027	18.21	0.066	≤ 24.00
	44	5220.0		16.01	0.040	14.44	0.028	18.31	0.068	≤ 24.00
	48	5240.0		16.23	0.042	14.42	0.028	18.43	0.070	≤ 24.00
	52	5260.0		16.29	0.043	14.34	0.027	18.43	0.070	≤ 24.00
	56	5280.0		16.34	0.043	14.09	0.026	18.37	0.069	≤ 24.00
	60	5300.0		16.12	0.041	14.15	0.026	18.26	0.067	≤ 24.00
	64	5320.0		13.97	0.025	11.74	0.015	16.01	0.040	≤ 24.00
	100	5500.0		9.04	0.008	7.64	0.006	11.41	0.014	≤ 24.00
	104	5520.0		15.60	0.036	14.88	0.031	18.27	0.067	≤ 24.00
	108	5540.0		15.75	0.038	14.77	0.030	18.30	0.068	≤ 24.00
	112	5560.0		15.69	0.037	14.74	0.030	18.25	0.067	≤ 24.00
	116	5580.0		15.85	0.038	14.43	0.028	18.21	0.066	≤ 24.00
	132	5660.0		16.05	0.040	14.45	0.028	18.33	0.068	≤ 24.00
	136	5680.0		16.12	0.041	14.67	0.029	18.47	0.070	≤ 24.00
	140	5700.0		8.84	0.008	6.65	0.005	10.89	0.012	≤ 24.00
	149	5745.0		15.64	0.037	14.97	0.031	18.33	0.068	≤ 30.00
	153	5765.0		15.72	0.037	14.93	0.031	18.35	0.068	≤ 30.00
	157	5785.0		15.68	0.037	15.03	0.032	18.38	0.069	≤ 30.00
	161	5805.0		15.58	0.036	14.37	0.027	18.03	0.063	≤ 30.00
165	5825.0	15.71	0.037	14.45	0.028	18.14	0.065	≤ 30.00		
Mode 8	38	5190.0	27	11.35	0.014	9.26	0.008	13.44	0.022	≤ 24.00
	46	5230.0		15.92	0.039	14.64	0.029	18.34	0.068	≤ 24.00
	54	5270		15.85	0.038	13.88	0.024	17.99	0.063	≤ 24.00
	62	5310		11.76	0.015	8.91	0.008	13.58	0.023	≤ 24.00
	102	5510		7.42	0.006	5.07	0.003	9.41	0.009	≤ 24.00
	110	5550		15.78	0.038	14.12	0.026	18.04	0.064	≤ 24.00
	134	5670		8.27	0.007	4.97	0.003	9.94	0.010	≤ 24.00
	151	5755.0		15.56	0.036	13.97	0.025	17.85	0.061	≤ 30.00
	159	5795.0		15.37	0.034	13.78	0.024	17.66	0.058	≤ 30.00

操作模式： Mode 6 / Mode 7 / Mode 8 / Mode 9 / Mode 10 / Mode 11 / Mode 12										
測試結果： 合格										
操作模式	頻道 CH	頻率 MHz	Data Rate (Mbps)	最大傳導輸出功率						
				量測值						限制值
				ANT-0		ANT-1		ANT-0+1		
				dBm	W	dBm	W	dBm	W	
Mode 9	36	5180.0	13	13.78	0.024	12.27	0.017	16.10	0.041	≤ 24.00
	40	5200.0		16.02	0.040	14.43	0.028	18.31	0.068	≤ 24.00
	44	5220.0		16.15	0.041	14.46	0.028	18.40	0.069	≤ 24.00
	48	5240.0		16.31	0.043	14.51	0.028	18.51	0.071	≤ 24.00
	52	5260.0		16.46	0.044	14.46	0.028	18.58	0.072	≤ 24.00
	56	5280.0		16.58	0.045	14.23	0.026	18.57	0.072	≤ 24.00
	60	5300.0		16.23	0.042	14.21	0.026	18.35	0.068	≤ 24.00
	64	5320.0		14.05	0.025	11.87	0.015	16.11	0.041	≤ 24.00
	100	5500.0		9.20	0.008	7.76	0.006	11.55	0.014	≤ 24.00
	104	5520.0		15.72	0.037	14.92	0.031	18.35	0.068	≤ 24.00
	108	5540.0		15.84	0.038	14.83	0.030	18.37	0.069	≤ 24.00
	112	5560.0		15.86	0.039	14.82	0.030	18.38	0.069	≤ 24.00
	116	5580.0		15.92	0.039	14.52	0.028	18.29	0.067	≤ 24.00
	132	5660.0		16.22	0.042	14.54	0.028	18.47	0.070	≤ 24.00
	136	5680.0		16.27	0.042	14.73	0.030	18.58	0.072	≤ 24.00
	140	5700.0		8.97	0.008	6.78	0.005	11.02	0.013	≤ 24.00
	149	5745.0		15.85	0.038	15.25	0.033	18.57	0.072	≤ 30.00
	153	5765.0		15.76	0.038	15.02	0.032	18.42	0.069	≤ 30.00
	157	5785.0		15.76	0.038	15.04	0.032	18.43	0.070	≤ 30.00
	161	5805.0		15.65	0.037	14.63	0.029	18.18	0.066	≤ 30.00
	165	5825.0		15.80	0.038	14.66	0.029	18.28	0.067	≤ 30.00
Mode 10	38	5190.0	27	11.47	0.014	9.35	0.009	13.55	0.023	≤ 24.00
	46	5230.0		15.99	0.040	14.77	0.030	18.43	0.070	≤ 24.00
	54	5270		15.97	0.040	13.91	0.025	18.07	0.064	≤ 24.00
	62	5310		11.84	0.015	8.97	0.008	13.65	0.023	≤ 24.00
	102	5510		7.68	0.006	5.18	0.003	9.62	0.009	≤ 24.00
	110	5550		15.97	0.040	14.28	0.027	18.22	0.066	≤ 24.00
	134	5670		8.40	0.007	5.05	0.003	10.05	0.010	≤ 24.00
	151	5755.0		15.65	0.037	14.04	0.025	17.93	0.062	≤ 30.00
	159	5795.0		15.46	0.035	13.89	0.024	17.76	0.060	≤ 30.00
Mode 11	42	5210.0	58.6	9.32	0.009	6.08	0.004	11.01	0.013	≤ 24.00
	58	5290.0		9.48	0.009	5.83	0.004	11.04	0.013	≤ 24.00
	106	5530.0		5.36	0.003	3.46	0.002	7.52	0.006	≤ 24.00
	155	5775.0		15.66	0.037	14.00	0.025	17.92	0.062	≤ 30.00
Mode 12	50	5250.0	117	8.97	0.008	6.64	0.005	10.97	0.013	≤ 24.00

4.3.3 最大傳導功率頻譜密度之要求

合格標準:

依據 NCC 低功率射頻電機技術規範(LP0002)之 4.7.3 節之要求:

1. 5.15-5.25 GHz 頻帶

(1) 供戶外操作使用:

- 在任何 1 MHz 頻帶中最大功率頻譜密度不能超過 17 dBm。
- 使用超過 6 dBi 方向增益之發射天線時，應依超過 6 dBi 天線方向增益的 dBi 總量，等量減少最大傳導輸出功率及最大功率頻譜密度。
- 在水平面仰角超過 30 度時，其最大 EIRP 不能超過 21 dBm。

(2) 供室內操作使用:

- 在任何 1 MHz 頻帶中最大功率頻譜密度不能超過 17 dBm。
- 使用超過 6 dBi 方向增益之發射天線時，應依超過 6 dBi 天線方向增益的 dBi 總量，等量減少最大傳導輸出功率及最大功率頻譜密度。

(3) 供固定式點對點操作使用:

- 在任何 1 MHz 頻帶中最大功率頻譜密度不能超過 17 dBm。
- 使用超過 23 dBi 方向增益之指向性天線時，應依超過 23 dBi 天線方向增益的 dBi 總量，等量減少最大傳導輸出功率及最大功率頻譜密度。
- 固定式點對點操作，不包括點對多點系統、全方向性應用及多台共站發射機傳送相同資訊。

(4) 供行動或可攜式裝置操作使用:

- 在任何 1 MHz 頻帶中最大功率頻譜密度不能超過 11 dBm。
- 使用超過 6 dBi 方向增益之發射天線時，應依超過 6 dBi 天線方向增益的 dBi 總量，等量減少最大傳導輸出功率及最大功率頻譜密度。

2. 5.25-5.35 GHz 與 5.470-5.725 GHz 頻帶

(1) 最大功率頻譜密度在任何 1 MHz 頻帶中不能超過 11 dBm。

(2) 使用超過 6 dBi 方向增益之發射天線時，應依超過 6 dBi 天線方向增益的 dBi 總量，等量減少最大傳導輸出功率及最大功率頻譜密度。

3. 5.725-5.850 GHz 頻帶

(1) 在任何 500 kHz 頻帶中最大功率頻譜密度不能超過 30 dBm。

(2) 供固定式點對點操作時，使用方向增益超過 6 dBi 之發射天線，可不需對應減少發射器之傳導輸出功率限制值。

(3) 除(2)外，使用超過 6 dBi 方向增益之發射天線時，應依超過 6 dBi 天線方向增益的 dBi 總量，等量減少最大傳導輸出功率及最大功率頻譜密度。

4. 最大功率頻譜密度量測規定:

(1) 應將量測儀器直接連接待測物，以傳導方式執行。

(2) 5.15 GHz~5.25 GHz、5.25 GHz~5.35 GHz 及 5.47 GHz~5.725 GHz 頻帶，量測儀器之頻寬應設定為 1 MHz 頻寬或待測物之 26 dB 發射頻寬，兩者取較小者。


(3) 5.725 GHz~5.850 GHz 頻帶，量測器之頻寬應設定為 500 kHz 或待測物之 26 dB 發射頻寬，兩者取較小者。

(4) 解析頻寬小於(2)或(3)時，應以補償方式計算總功率頻譜密度。

IEEE 802.11a / IEEE 802.11ac 20 MHz / IEEE 802.11ac 40 MHz / IEEE 802.11ac 80 MHz / IEEE 802.11ac 160 MHz

* Directional Gain = $10 \cdot \log\{[10^{(G1/20)} + 10^{(G2/20)} + \dots + 10^{(Gn/20)}]^2 / NANT\} = 1.58 \text{ dBi} < 6 \text{ dBi}$

測試架構圖：

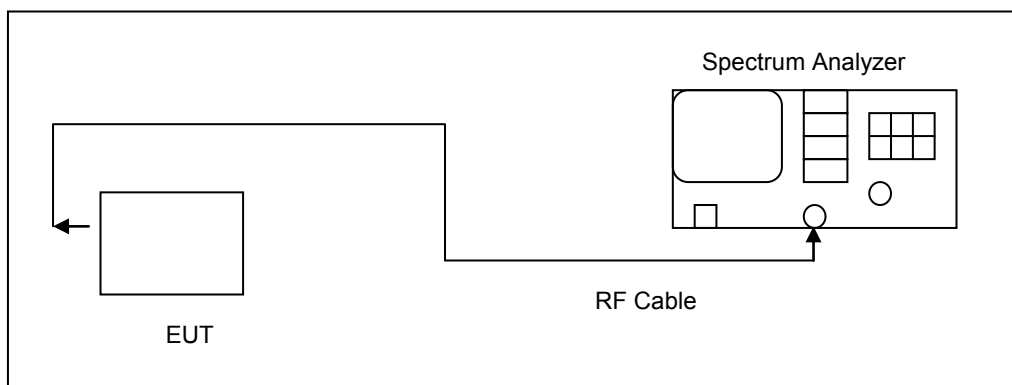

測試結果:

操作模式	: Mode 6 / Mode 9 / Mode 10 / Mode 11 / Mode 12
測試結果	: 合格

ANT-0						
操作模式	頻道 (CH)	頻率 (MHz)	量測值 (dBm/MHz)	Duty Factor (dB)	轉換值 (dBm/MHz)	限制值 (dBm/MHz)
Mode 6	36	5180.0	2.168	0.031	2.199	11
	40	5200.0	5.045	0.031	5.076	11
	48	5240.0	5.553	0.031	5.584	11
	52	5260.0	5.602	0.031	5.633	11
	56	5280.0	5.236	0.031	5.267	11
	64	5320.0	2.158	0.031	2.189	11
	100	5500.0	-2.499	0.031	-2.468	11
	112	5560.0	5.577	0.031	5.608	11
	140	5700.0	-1.272	0.031	-1.241	11
ANT-1						
操作模式	頻道 (CH)	頻率 (MHz)	量測值 (dBm/MHz)	Duty Factor (dB)	轉換值 (dBm/MHz)	限制值 (dBm/MHz)
Mode 6	36	5180.0	1.319	0.031	1.350	11
	40	5200.0	4.462	0.031	4.493	11
	48	5240.0	4.466	0.031	4.497	11
	52	5260.0	4.242	0.031	4.273	11
	56	5280.0	3.672	0.031	3.703	11
	64	5320.0	-0.018	0.031	0.013	11
	100	5500.0	-2.714	0.031	-2.683	11
	112	5560.0	5.260	0.031	5.291	11
	140	5700.0	-3.860	0.031	-3.829	11
ANT-0+1						
操作模式	頻道 (CH)	頻率 (MHz)	轉換值 (dBm/MHz)		限制值 (dBm/MHz)	
Mode 6	36	5180.0	4.806		11	
	40	5200.0	7.805		11	
	48	5240.0	8.085		11	
	52	5260.0	8.017		11	
	56	5280.0	7.566		11	
	64	5320.0	4.247		11	
	100	5500.0	0.436		11	
	112	5560.0	8.463		11	
	140	5700.0	0.666		11	

Note: Power Density = measured result + 10 log (1/duty cycle) + Conversion ratio = measured result + duty factory.

Conversion ration = 10*Log(500 k/100 k)

操作模式	: Mode 6 / Mode 9 / Mode 10 / Mode 11 / Mode 12
測試結果	: 合格

ANT-0						
操作模式	頻道 (CH)	頻率 (MHz)	量測值 (dBm/100 kHz)	Duty Factor (dB)	轉換值 (dBm/500 kHz)	限制值 (dBm/500 kHz)
Mode 6	149	5745.0	-2.569	0.031	4.452	30
	157	5785.0	-3.129	0.031	3.892	30
	165	5825.0	-3.521	0.031	3.500	30
ANT-1						
操作模式	頻道 (CH)	頻率 (MHz)	量測值 (dBm/100 kHz)	Duty Factor (dB)	轉換值 (dBm/500 kHz)	限制值 (dBm/500 kHz)
Mode 6	149	5745.0	-3.443	0.031	3.578	30
	157	5785.0	-3.800	0.031	3.221	30
	165	5825.0	-4.388	0.031	2.633	30
ANT-0+1						
操作模式	頻道 (CH)	頻率 (MHz)	轉換值 (dBm/500 kHz)		限制值 (dBm/500 kHz)	
Mode 6	149	5745.0	7.047		30	
	157	5785.0	6.580		30	
	165	5825.0	6.098		30	

Note: Power Density = measured result + 10 log (1/duty cycle) + Conversion ratio = measured result + duty factory.

Conversion ration = 10*Log(500 k/100 k)

操作模式	: Mode 6 / Mode 9 / Mode 10 / Mode 11 / Mode 12
測試結果	: 合格

ANT-0						
操作模式	頻道 (CH)	頻率 (MHz)	量測值 (dBm/MHz)	Duty Factor (dB)	轉換值 (dBm/MHz)	限制值 (dBm/MHz)
Mode 9	36	5180.0	2.468	0.022	2.490	11
	40	5200.0	4.658	0.022	4.680	11
	48	5240.0	4.653	0.022	4.675	11
	52	5260.0	4.725	0.022	4.747	11
	56	5280.0	4.595	0.022	4.617	11
	64	5320.0	2.270	0.022	2.292	11
	100	5500.0	-2.144	0.022	-2.122	11
	112	5560.0	5.041	0.022	5.063	11
	140	5700.0	-1.281	0.022	-1.259	11
ANT-1						
操作模式	頻道 (CH)	頻率 (MHz)	量測值 (dBm/MHz)	Duty Factor (dB)	轉換值 (dBm/MHz)	限制值 (dBm/MHz)
Mode 9	36	5180.0	0.623	0.022	0.645	11
	40	5200.0	3.269	0.022	3.291	11
	48	5240.0	3.099	0.022	3.121	11
	52	5260.0	2.820	0.022	2.842	11
	56	5280.0	2.557	0.022	2.579	11
	64	5320.0	-0.143	0.022	-0.121	11
	100	5500.0	-3.125	0.022	-3.103	11
	112	5560.0	3.987	0.022	4.009	11
	140	5700.0	-4.220	0.022	-4.198	11
ANT-0+1						
操作模式	頻道 (CH)	頻率 (MHz)	轉換值 (dBm/MHz)		限制值 (dBm/MHz)	
Mode 9	36	5180.0	4.675		11	
	40	5200.0	7.051		11	
	48	5240.0	6.978		11	
	52	5260.0	6.909		11	
	56	5280.0	6.727		11	
	64	5320.0	4.262		11	
	100	5500.0	0.426		11	
	112	5560.0	7.578		11	
	140	5700.0	0.526		11	

Note: Power Density = measured result + 10 log (1/duty cycle) + Conversion ratio = measured result + duty factory.

Conversion ratio = 10*Log(500 k/100 k)

操作模式	: Mode 6 / Mode 9 / Mode 10 / Mode 11 / Mode 12
測試結果	: 合格

ANT-0						
操作模式	頻道 (CH)	頻率 (MHz)	量測值 (dBm/100 kHz)	Duty Factor (dB)	轉換值 (dBm/500 kHz)	限制值 (dBm/500 kHz)
Mode 9	149	5745.0	-4.132	0.022	2.880	30
	157	5785.0	-4.239	0.022	2.773	30
	165	5825.0	-4.899	0.022	2.113	30
ANT-1						
操作模式	頻道 (CH)	頻率 (MHz)	量測值 (dBm/100 kHz)	Duty Factor (dB)	轉換值 (dBm/500 kHz)	限制值 (dBm/500 kHz)
Mode 9	149	5745.0	-4.553	0.022	2.459	30
	157	5785.0	-5.096	0.022	1.916	30
	165	5825.0	-5.816	0.022	1.196	30
ANT-0+1						
操作模式	頻道 (CH)	頻率 (MHz)	轉換值 (dBm/500 kHz)		限制值 (dBm/500 kHz)	
Mode 9	149	5745.0	5.685		30	
	157	5785.0	5.376		30	
	165	5825.0	4.689		30	

Note: Power Density = measured result + 10 log (1/duty cycle) + Conversion ratio = measured result + duty factory.

Conversion ration = 10*Log(500 k/100 k)

操作模式	: Mode 6 / Mode 9 / Mode 10 / Mode 11 / Mode 12
測試結果	: 合格

ANT-0						
操作模式	頻道 (CH)	頻率 (MHz)	量測值 (dBm/MHz)	Duty Factor (dB)	轉換值 (dBm/MHz)	限制值 (dBm/MHz)
Mode 10	38	5190.0	-2.851	0.067	-2.784	11
	46	5230.0	1.809	0.067	1.876	11
	54	5270.0	1.575	0.067	1.642	11
	62	5310.0	-2.869	0.067	-2.802	11
	102	5510.0	-5.697	0.067	-5.630	11
	110	5550.0	2.545	0.067	2.612	11
	134	5670.0	-5.074	0.067	-5.007	11
ANT-1						
操作模式	頻道 (CH)	頻率 (MHz)	量測值 (dBm/MHz)	Duty Factor (dB)	轉換值 (dBm/MHz)	限制值 (dBm/MHz)
Mode 10	38	5190.0	-4.316	0.067	-4.249	11
	46	5230.0	0.170	0.067	0.237	11
	54	5270.0	-0.613	0.067	-0.546	11
	62	5310.0	-5.708	0.067	-5.641	11
	102	5510.0	-8.343	0.067	-8.276	11
	110	5550.0	1.061	0.067	1.128	11
	134	5670.0	-8.825	0.067	-8.758	11
ANT-0+1						
操作模式	頻道 (CH)	頻率 (MHz)	轉換值 (dBm/MHz)		限制值 (dBm/MHz)	
Mode 10	38	5190.0	-0.445		11	
	46	5230.0	4.144		11	
	54	5270.0	3.695		11	
	62	5310.0	-0.983		11	
	102	5510.0	-3.744		11	
	110	5550.0	4.944		11	
	134	5670.0	-3.479		11	

Note: Power Density = measured result + 10 log (1/duty cycle) + Conversion ratio = measured result + duty factory.

Conversion ratio = 10*Log(500 k/100 k)

操作模式	: Mode 6 / Mode 9 / Mode 10 / Mode 11 / Mode 12
測試結果	: 合格

ANT-0						
操作模式	頻道 (CH)	頻率 (MHz)	量測值 (dBm/100 kHz)	Duty Factor (dB)	轉換值 (dBm/500 kHz)	限制值 (dBm/500 kHz)
Mode 10	151	5755.0	-7.001	0.067	0.056	30
	159	5795.0	-7.949	0.067	-0.892	30
ANT-1						
操作模式	頻道 (CH)	頻率 (MHz)	量測值 (dBm/100 kHz)	Duty Factor (dB)	轉換值 (dBm/500 kHz)	限制值 (dBm/500 kHz)
Mode 10	151	5755.0	-7.592	0.067	-0.535	30
	159	5795.0	-8.221	0.067	-1.164	30
ANT-0+1						
操作模式	頻道 (CH)	頻率 (MHz)	轉換值 (dBm/500 kHz)		限制值 (dBm/500 kHz)	
Mode 10	151	5755.0	2.781		30	
	159	5795.0	1.984		30	

Note: Power Density = measured result + 10 log (1/duty cycle) + Conversion ratio = measured result + duty factory.

Conversion ration = 10*Log(500 k/100 k)

操作模式	: Mode 6 / Mode 9 / Mode 10 / Mode 11 / Mode 12
測試結果	: 合格

ANT-0						
操作模式	頻道 (CH)	頻率 (MHz)	量測值 (dBm/MHz)	Duty Factor (dB)	轉換值 (dBm/MHz)	限制值 (dBm/MHz)
Mode 11	42	5210.0	-8.046	0.110	-7.936	11
	58	5290.0	-8.115	0.110	-8.005	11
	106	5530.0	-11.281	0.110	-11.171	11
ANT-1						
操作模式	頻道 (CH)	頻率 (MHz)	量測值 (dBm/MHz)	Duty Factor (dB)	轉換值 (dBm/MHz)	限制值 (dBm/MHz)
Mode 11	42	5210.0	-9.482	0.110	-9.372	11
	58	5290.0	-10.622	0.110	-10.512	11
	106	5530.0	-12.668	0.110	-12.558	11
ANT-0+1						
操作模式	頻道 (CH)	頻率 (MHz)	轉換值 (dBm/MHz)		限制值 (dBm/MHz)	
Mode 11	42	5210.0	-5.584		11	
	58	5290.0	-6.069		11	
	106	5530.0	-8.799		11	

ANT-0						
操作模式	頻道 (CH)	頻率 (MHz)	量測值 (dBm/100 kHz)	Duty Factor (dB)	轉換值 (dBm/500 kHz)	限制值 (dBm/500 kHz)
Mode 11	155	5775.0	-10.101	0.110	-3.001	30
ANT-1						
操作模式	頻道 (CH)	頻率 (MHz)	量測值 (dBm/100 kHz)	Duty Factor (dB)	轉換值 (dBm/500 kHz)	限制值 (dBm/500 kHz)
Mode 11	155	5775.0	-10.902	0.110	-3.802	30
ANT-0+1						
操作模式	頻道 (CH)	頻率 (MHz)	轉換值 (dBm/500 kHz)		限制值 (dBm/500 kHz)	
Mode 11	155	5775.0	-0.373		30	

Note: Power Density = measured result + 10 log (1/duty cycle) + Conversion ratio = measured result + duty factory.

Conversion ration = 10*Log(500 k/100 k)

操作模式	: Mode 6 / Mode 9 / Mode 10 / Mode 11 / Mode 12
測試結果	: 合格

ANT-0						
操作模式	頻道 (CH)	頻率 (MHz)	量測值 (dBm/MHz)	Duty Factor (dB)	轉換值 (dBm/MHz)	限制值 (dBm/MHz)
Mode 12	50	5250.0	-11.495	0.215	-11.385	11
ANT-1						
操作模式	頻道 (CH)	頻率 (MHz)	量測值 (dBm/MHz)	Duty Factor (dB)	轉換值 (dBm/MHz)	限制值 (dBm/MHz)
Mode 12	50	5250.0	-12.782	0.215	-12.672	11
ANT-0+1						
操作模式	頻道 (CH)	頻率 (MHz)	轉換值 (dBm/MHz)		限制值 (dBm/MHz)	
Mode 12	50	5250.0	-8.970		11	

Note: Power Density = measured result + 10 log (1/duty cycle) + Conversion ratio = measured result + duty factory.

Conversion ration = 10*Log(500 k/100 k)

