


POWER SPECTRAL DENSITY



Variant: 802.11n HT-40, Channel: 5710.00 MHz, Chain a, Temp: 20, Voltage: 55 Vdc

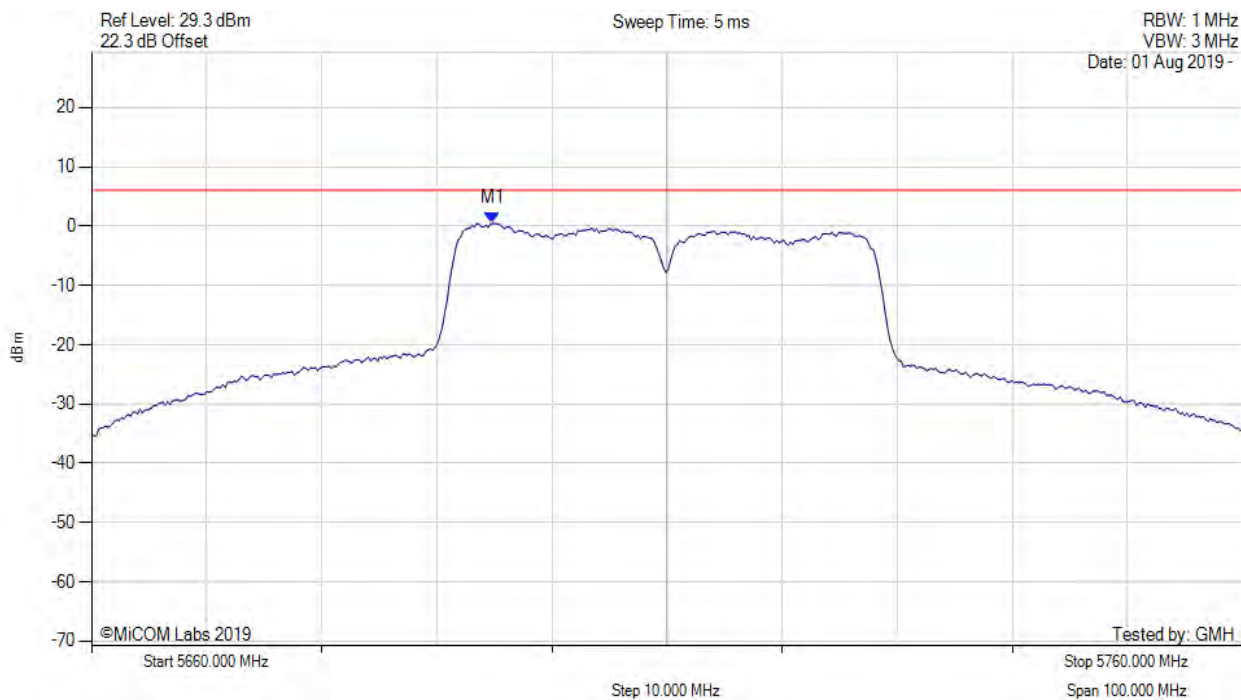


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5694.870 MHz : 0.482 dBm	Limit: ≤ 6.090 dBm

[back to matrix](#)

POWER SPECTRAL DENSITY



Variant: 802.11n HT-40, Channel: 5710.00 MHz, Chain b, Temp: 20, Voltage: 55 Vdc

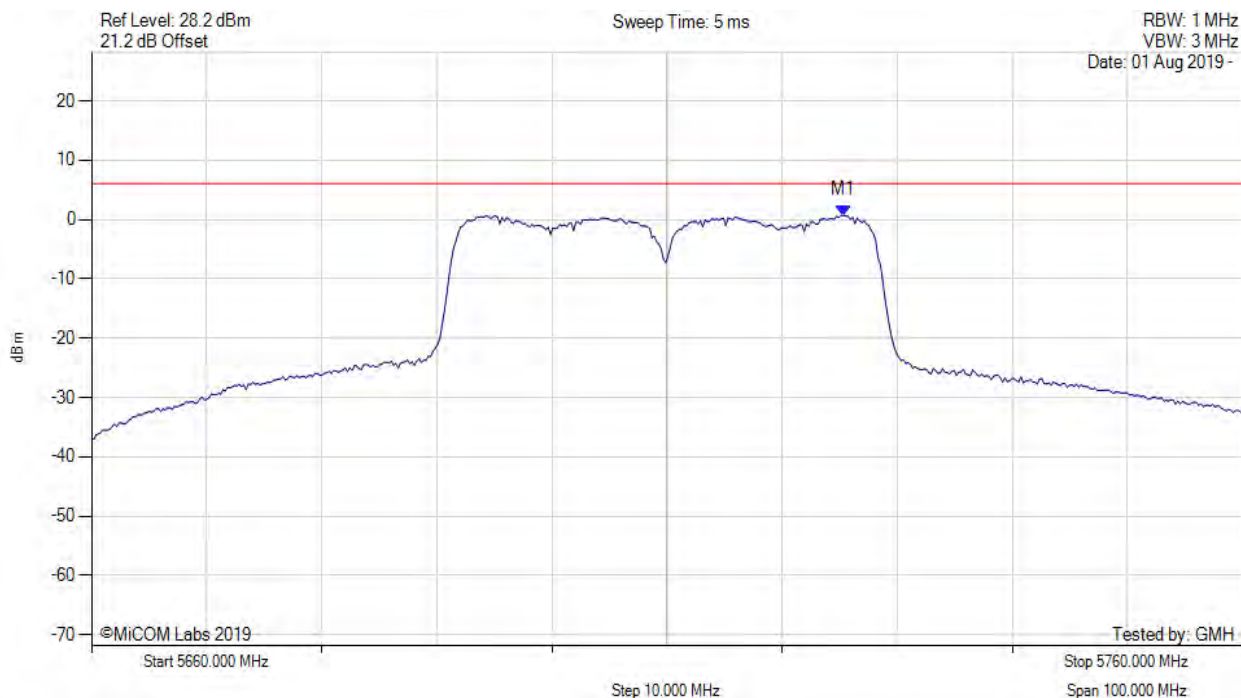


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5725.331 MHz : 0.705 dBm	Limit: ≤ 6.090 dBm

[back to matrix](#)

POWER SPECTRAL DENSITY



Variant: 802.11n HT-40, Channel: 5710.00 MHz, SUM, Temp: 20, Voltage: 55 Vdc

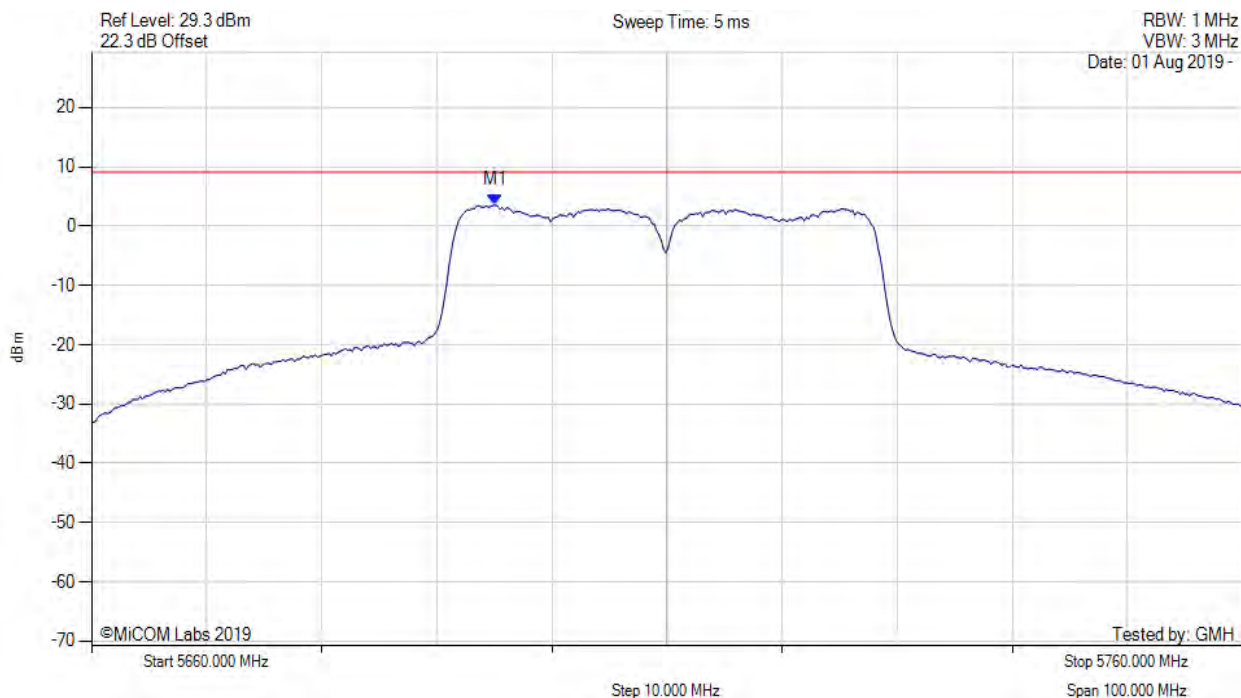


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5695.100 MHz : 3.533 dBm M1 + DCCF : 5695.100 MHz : 3.621 dBm Duty Cycle Correction Factor : +0.09 dB	Limit: ≤ 9.1 dBm Margin: -5.5 dB

[back to matrix](#)

POWER SPECTRAL DENSITY



Variant: 802.11a, Channel: 5745.00 MHz, Chain a, Temp: 20, Voltage: 55 Vdc

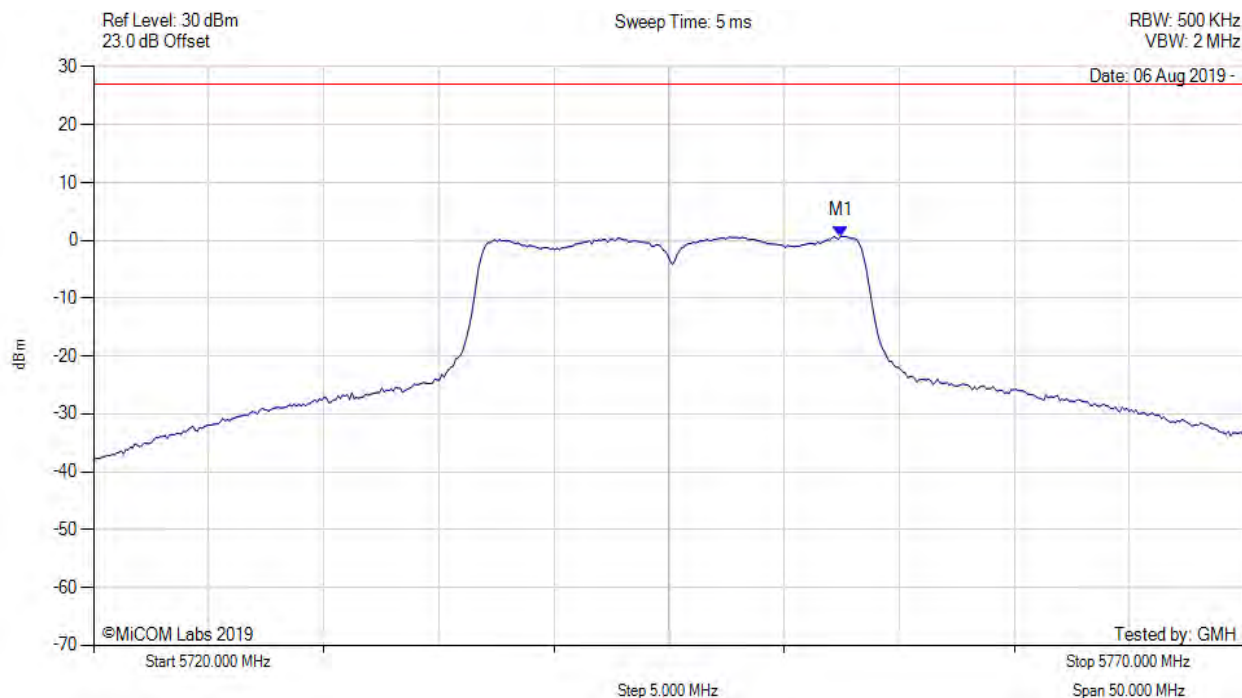


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5752.465 MHz : 0.743 dBm	Limit: ≤ 26.990 dBm

[back to matrix](#)

POWER SPECTRAL DENSITY



Variant: 802.11a, Channel: 5745.00 MHz, Chain b, Temp: 20, Voltage: 55 Vdc

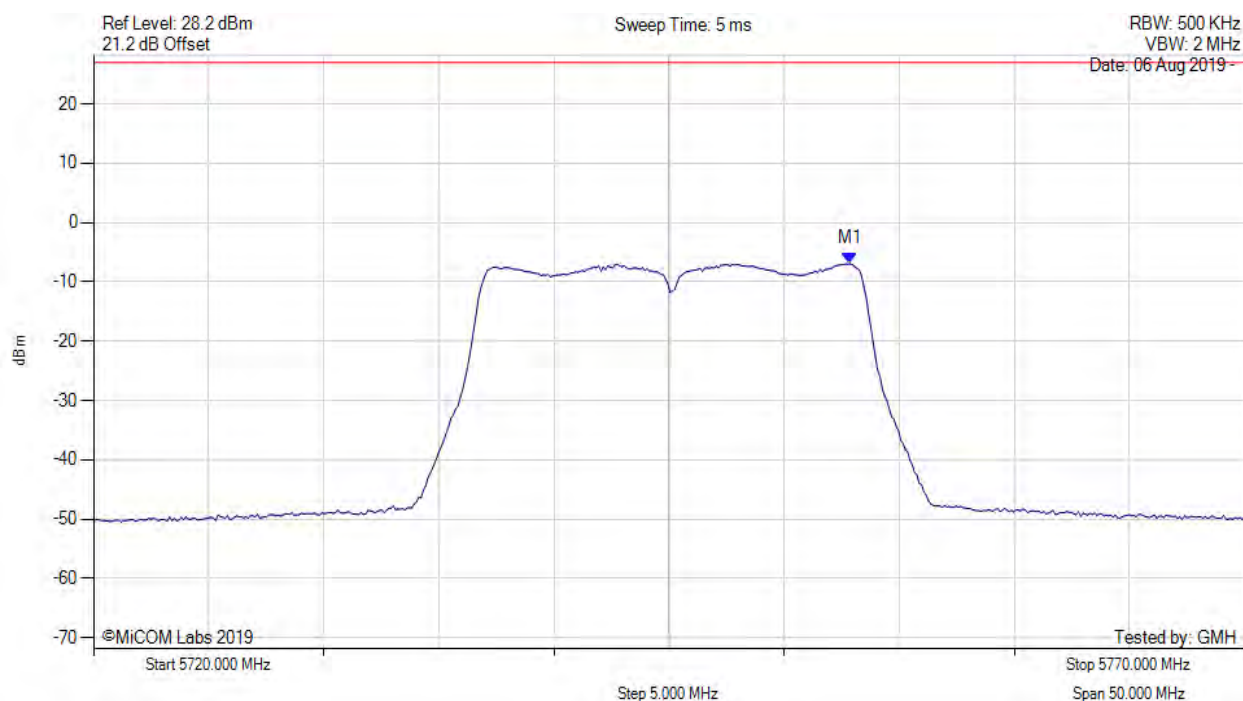


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5752.866 MHz : -6.955 dBm	Limit: ≤ 26.990 dBm

[back to matrix](#)

POWER SPECTRAL DENSITY



Variant: 802.11a, Channel: 5745.00 MHz, SUM, Temp: 20, Voltage: 55 Vdc

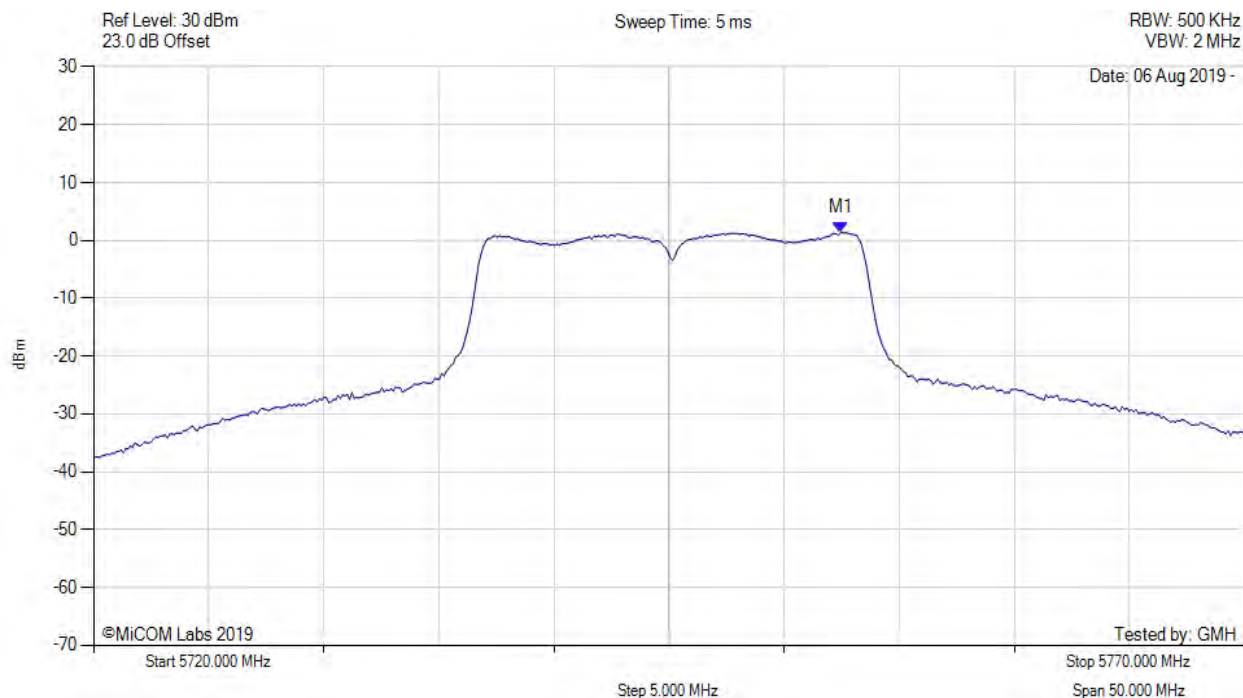


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5752.500 MHz : 1.400 dBm M1 + DCCF : 5752.500 MHz : 1.488 dBm Duty Cycle Correction Factor : +0.09 dB	Limit: ≤ 30.0 dBm Margin: -28.5 dB

[back to matrix](#)

POWER SPECTRAL DENSITY



Variant: 802.11a, Channel: 5785.00 MHz, Chain a, Temp: 20, Voltage: 55 Vdc

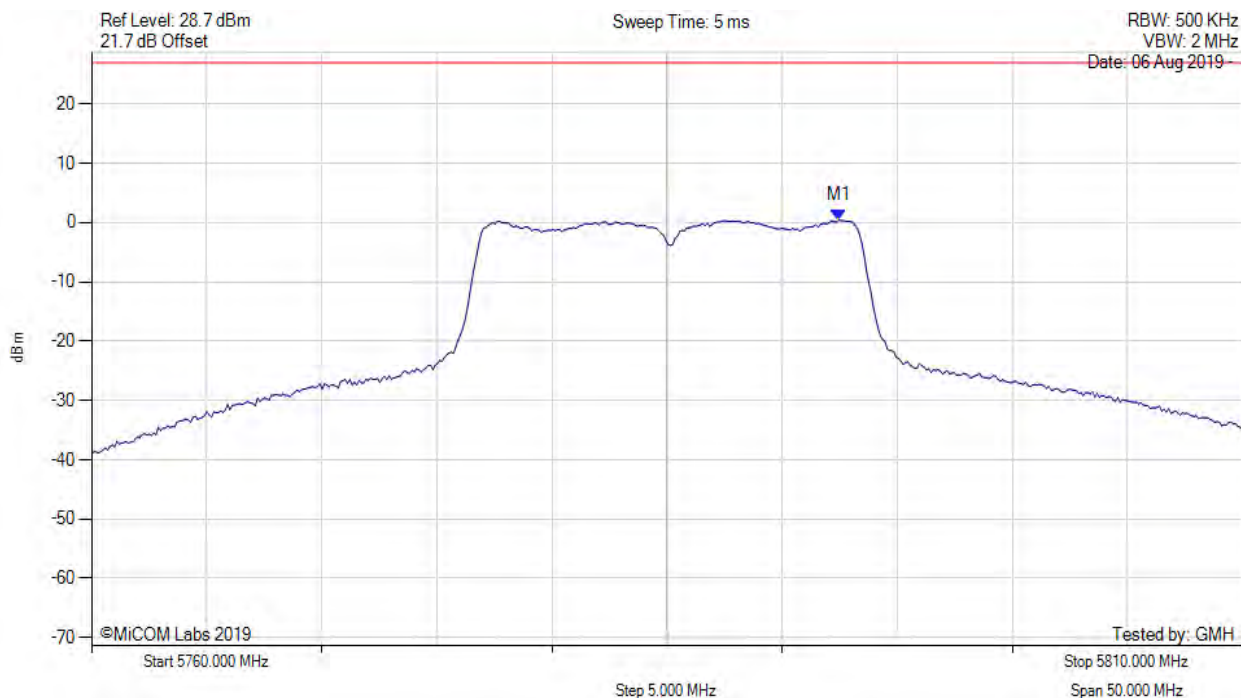


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5792.465 MHz : 0.404 dBm	Limit: ≤ 26.990 dBm

[back to matrix](#)

POWER SPECTRAL DENSITY



Variant: 802.11a, Channel: 5785.00 MHz, Chain b, Temp: 20, Voltage: 55 Vdc

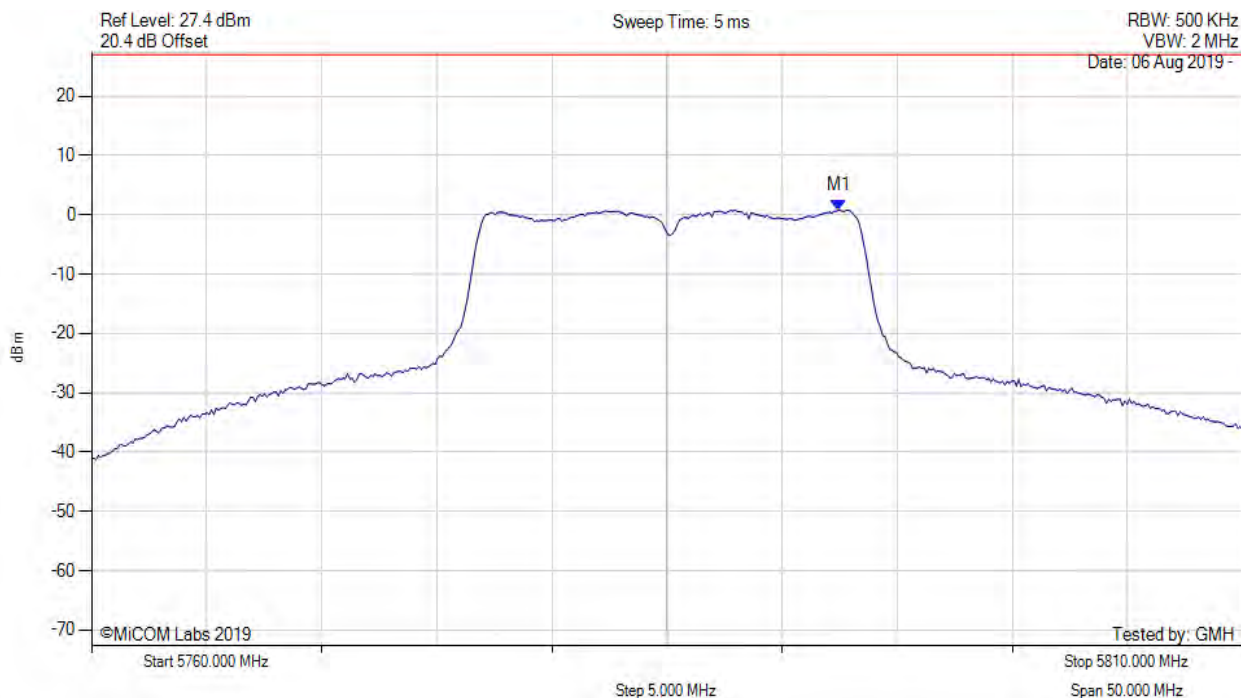


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5792.465 MHz : 0.811 dBm	Channel Frequency: 5785.00 MHz

[back to matrix](#)

POWER SPECTRAL DENSITY



Variant: 802.11a, Channel: 5785.00 MHz, SUM, Temp: 20, Voltage: 55 Vdc

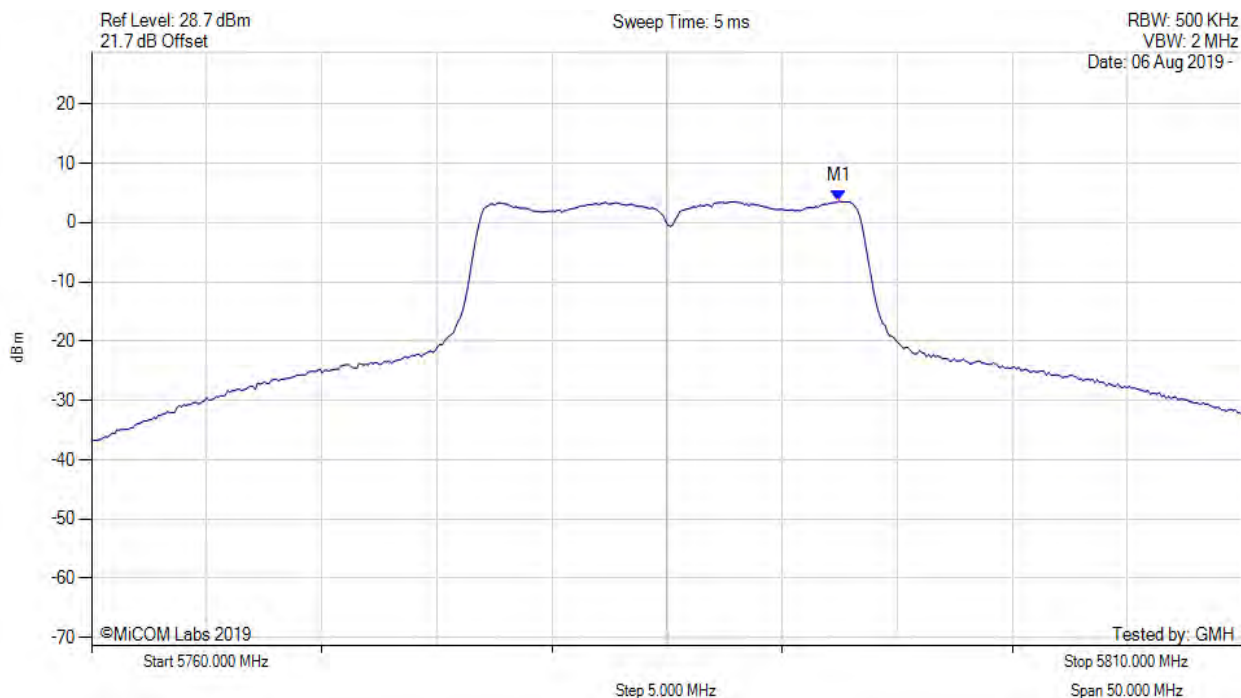


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5792.500 MHz : 3.623 dBm M1 + DCCF : 5792.500 MHz : 3.711 dBm Duty Cycle Correction Factor : +0.09 dB	Limit: ≤ 30.0 dBm Margin: -26.3 dB

[back to matrix](#)

POWER SPECTRAL DENSITY



Variant: 802.11a, Channel: 5825.00 MHz, Chain a, Temp: 20, Voltage: 55 Vdc

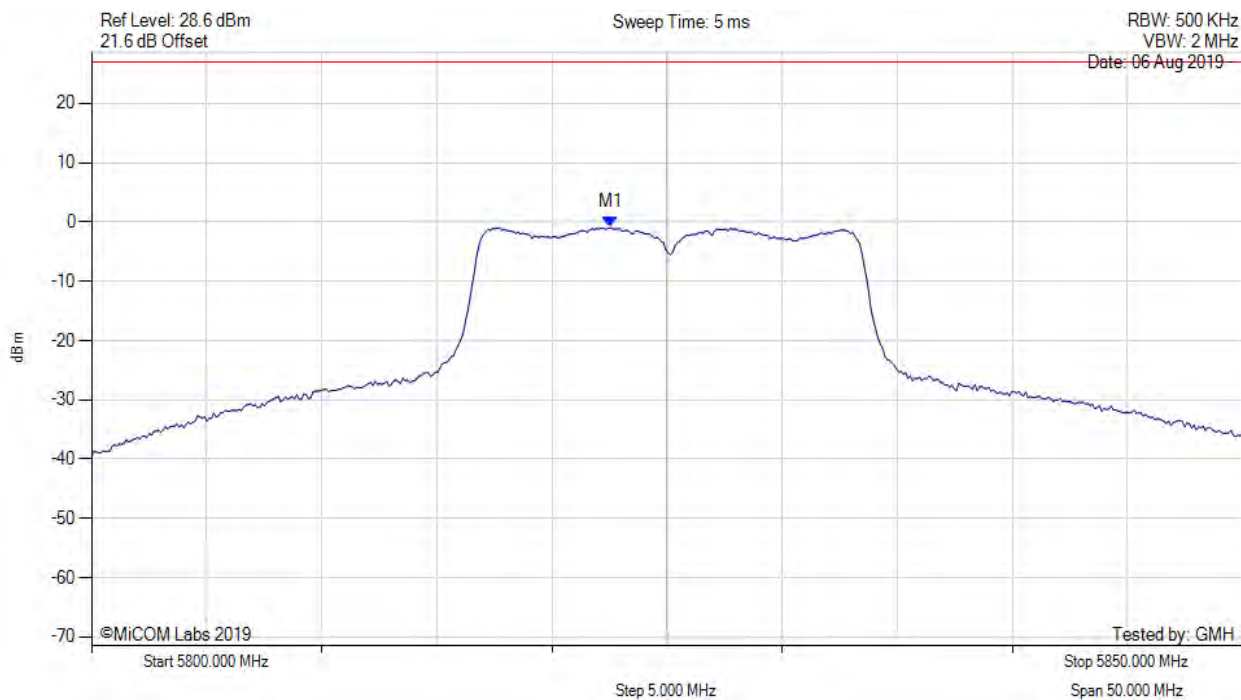


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5822.545 MHz : -0.953 dBm	Limit: ≤ 26.990 dBm

[back to matrix](#)

POWER SPECTRAL DENSITY



Variant: 802.11a, Channel: 5825.00 MHz, Chain b, Temp: 20, Voltage: 55 Vdc

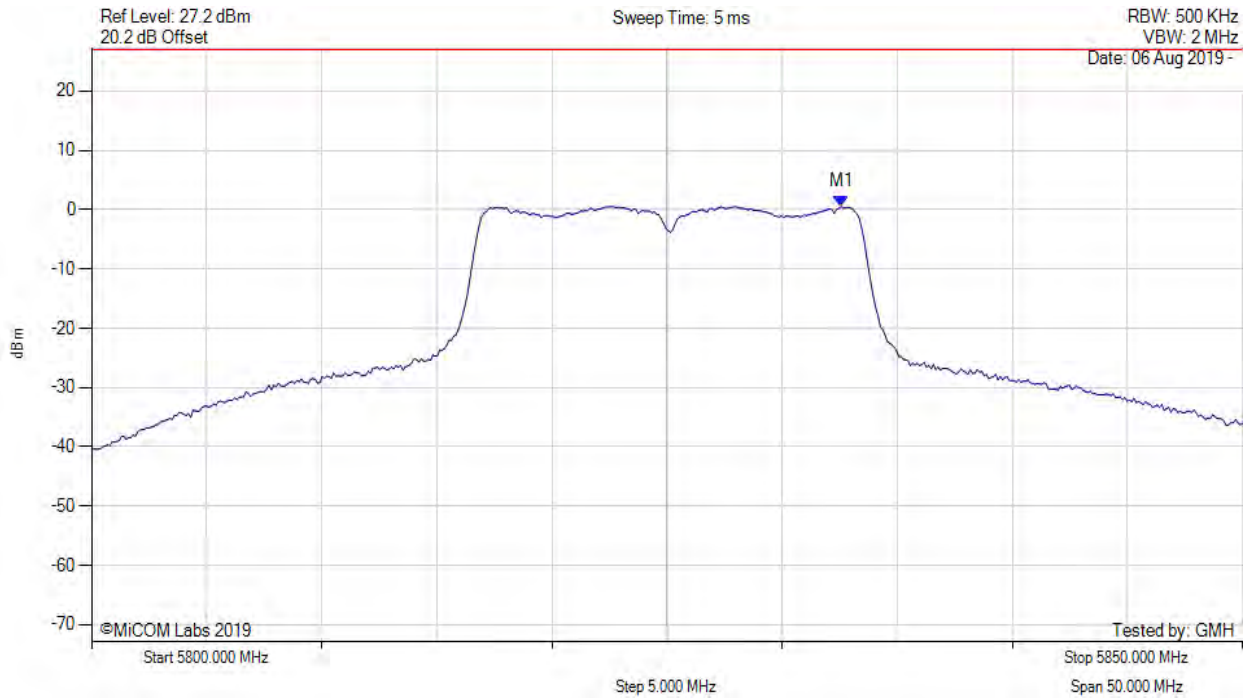


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5832.565 MHz : 0.538 dBm	Limit: ≤ 26.990 dBm

[back to matrix](#)

POWER SPECTRAL DENSITY



Variant: 802.11a, Channel: 5825.00 MHz, SUM, Temp: 20, Voltage: 55 Vdc

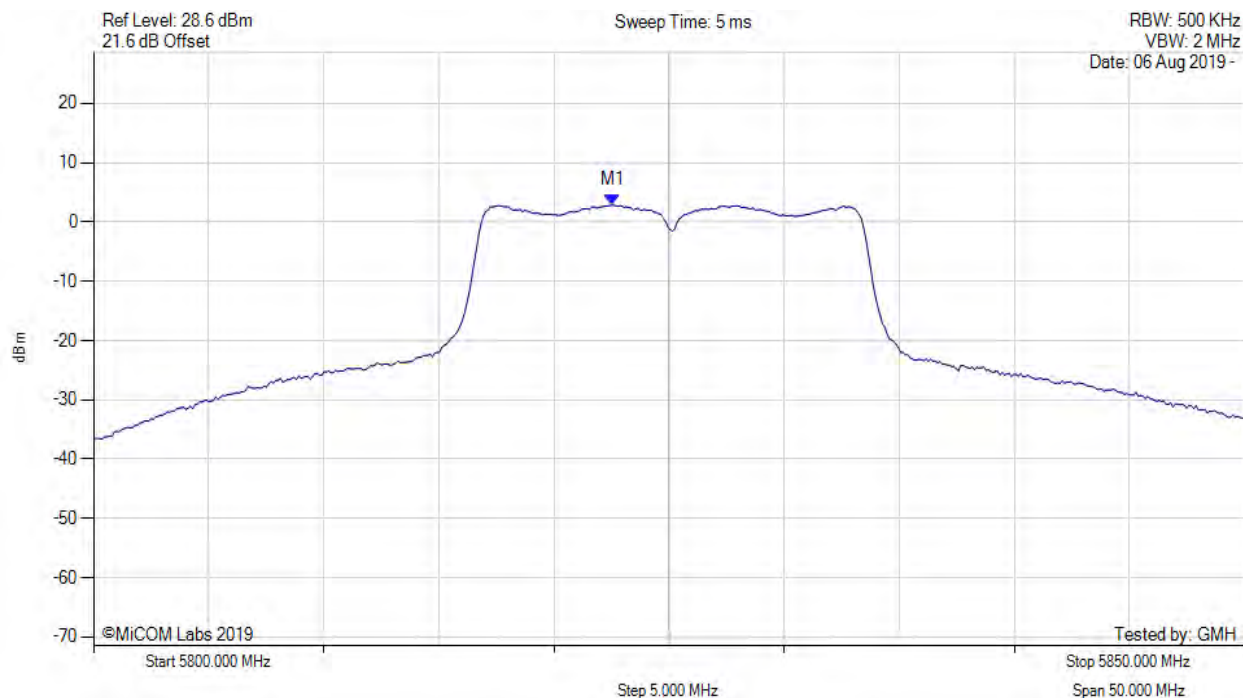


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5822.500 MHz : 2.843 dBm M1 + DCCF : 5822.500 MHz : 2.931 dBm Duty Cycle Correction Factor : +0.09 dB	Limit: ≤ 30.0 dBm Margin: -27.1 dB

[back to matrix](#)

POWER SPECTRAL DENSITY



Variant: 802.11ac-80, Channel: 5775.00 MHz, Chain a, Temp: 20, Voltage: 55 Vdc

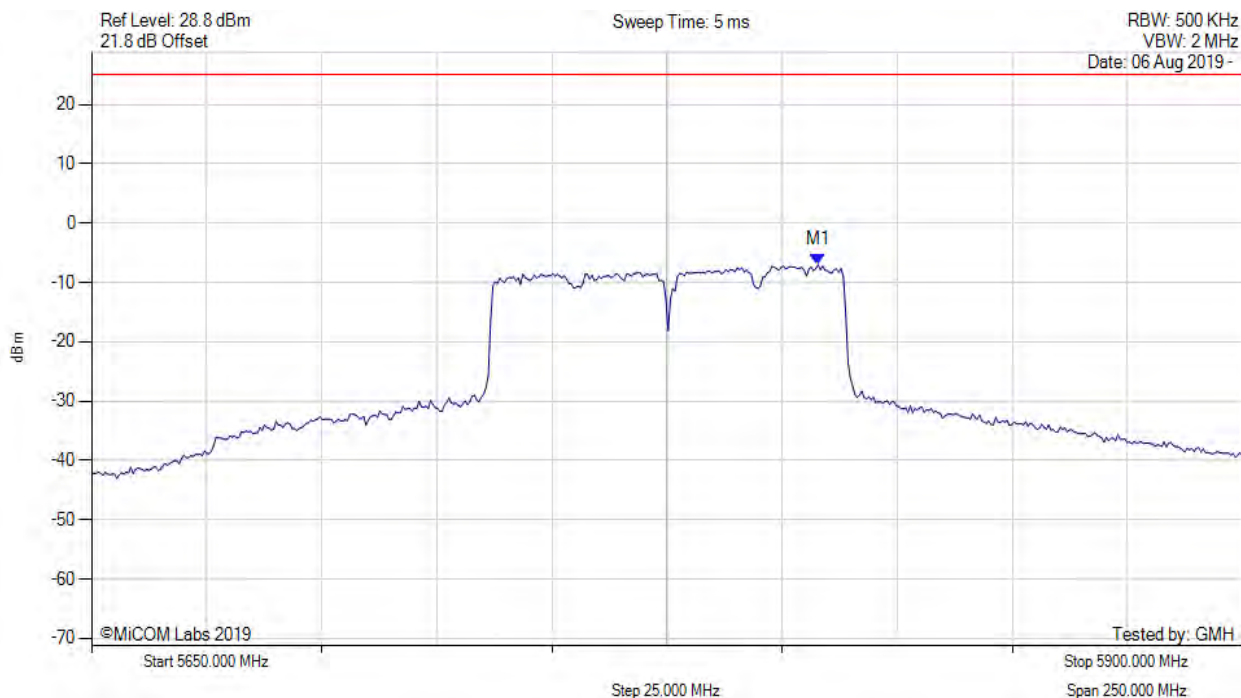


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5807.816 MHz : -7.018 dBm	Limit: ≤ 25.090 dBm

[back to matrix](#)

POWER SPECTRAL DENSITY



Variant: 802.11ac-80, Channel: 5775.00 MHz, Chain a, Temp: 20, Voltage: 55 Vdc

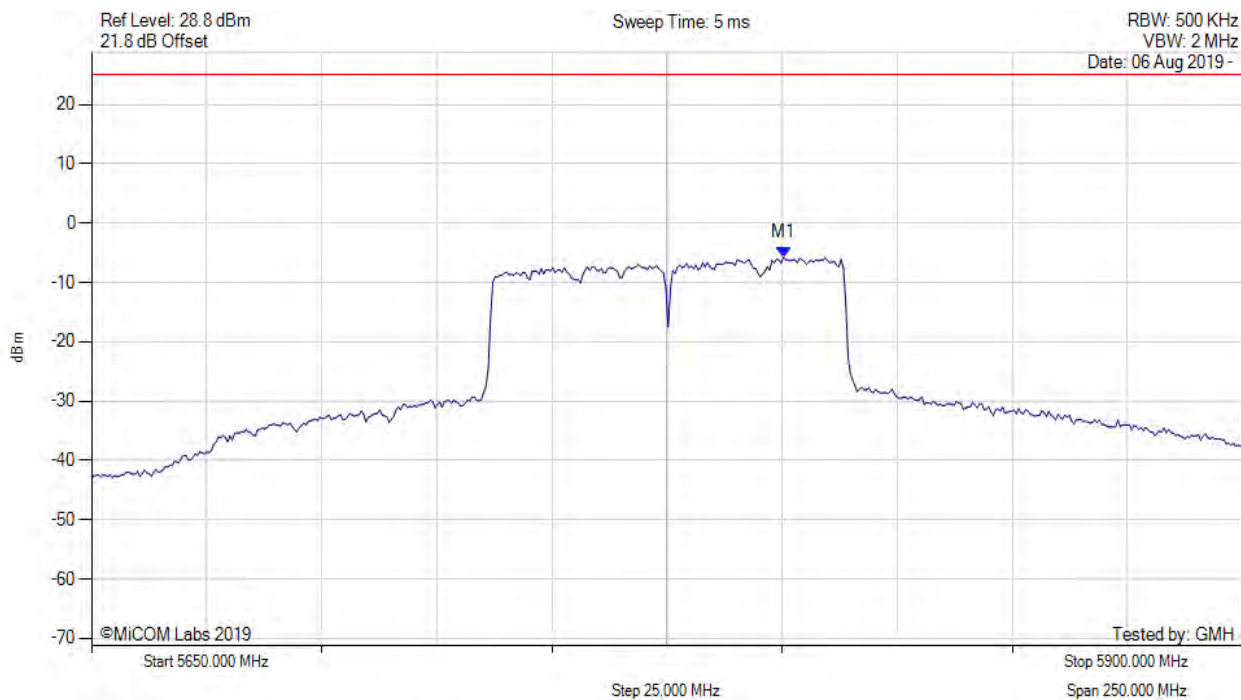


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5800.301 MHz : -5.749 dBm	Channel Frequency: 5775.00 MHz

[back to matrix](#)

POWER SPECTRAL DENSITY



Variant: 802.11ac-80, Channel: 5775.00 MHz, Chain b, Temp: 20, Voltage: 55 Vdc

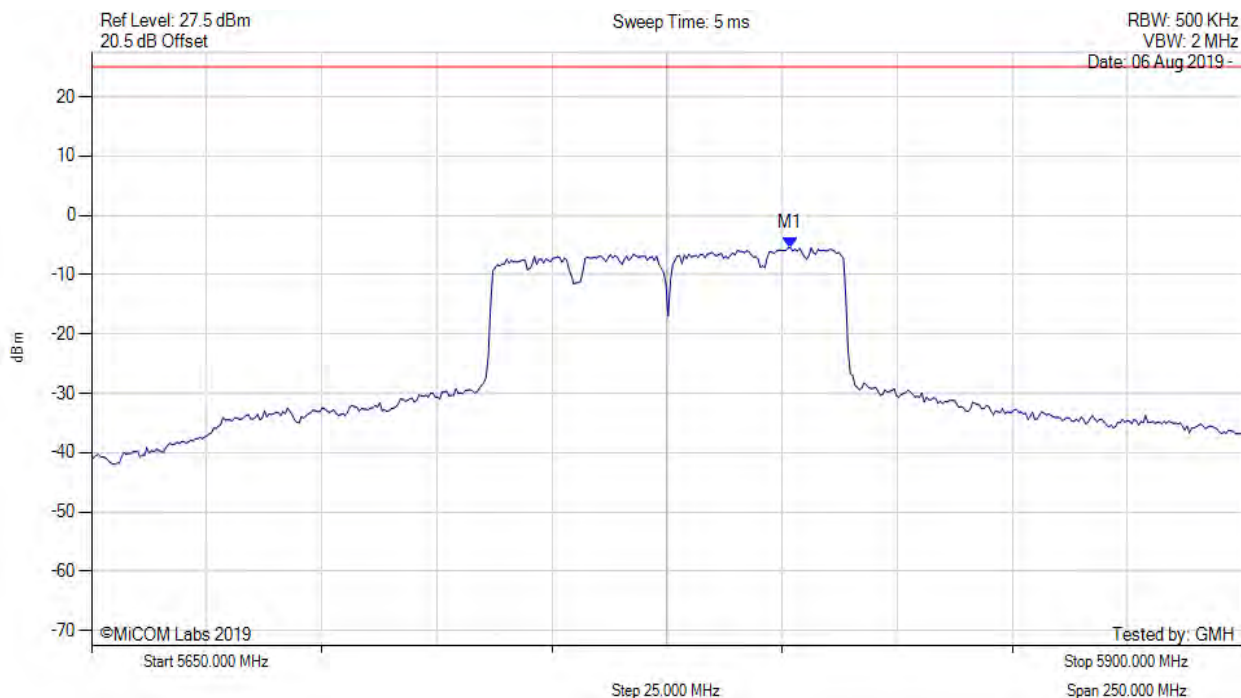


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5801.804 MHz : -5.451 dBm	Limit: ≤ 25.090 dBm

[back to matrix](#)

POWER SPECTRAL DENSITY



Variant: 802.11ac-80, Channel: 5775.00 MHz, Chain b, Temp: 20, Voltage: 55 Vdc

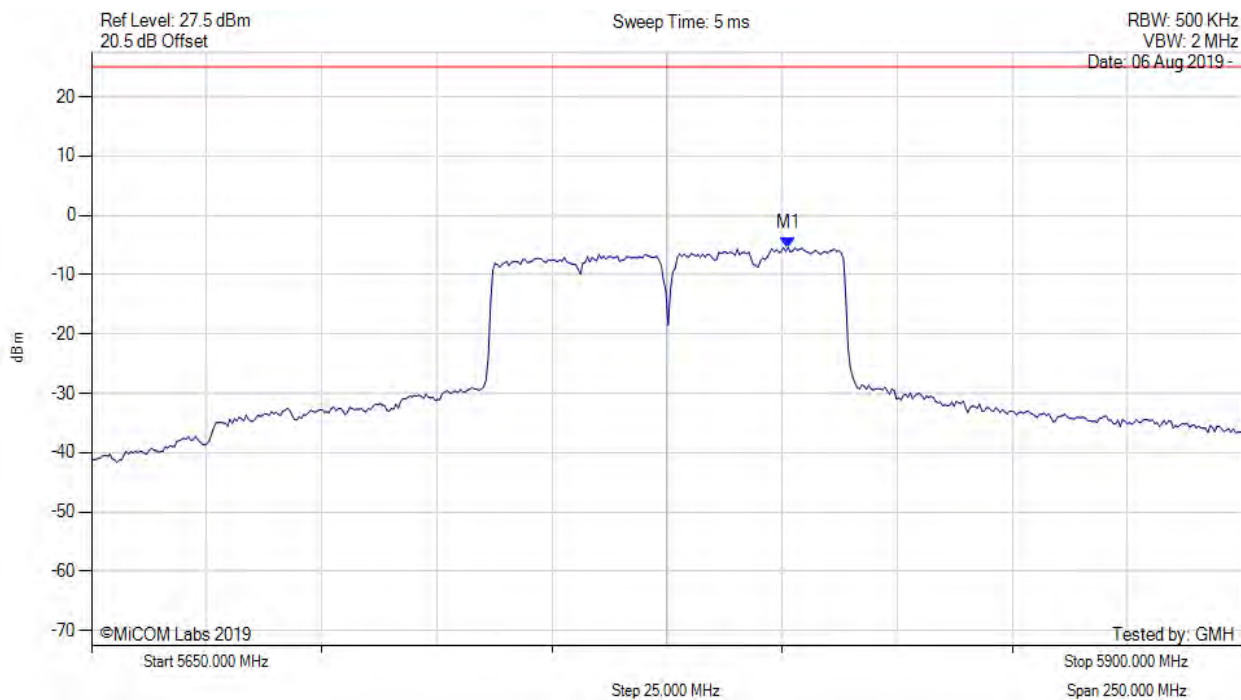


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5801.303 MHz : -5.423 dBm	Channel Frequency: 5775.00 MHz

[back to matrix](#)

POWER SPECTRAL DENSITY



Variant: 802.11ac-80, Channel: 5775.00 MHz, SUM, Temp: 20, Voltage: 55 Vdc

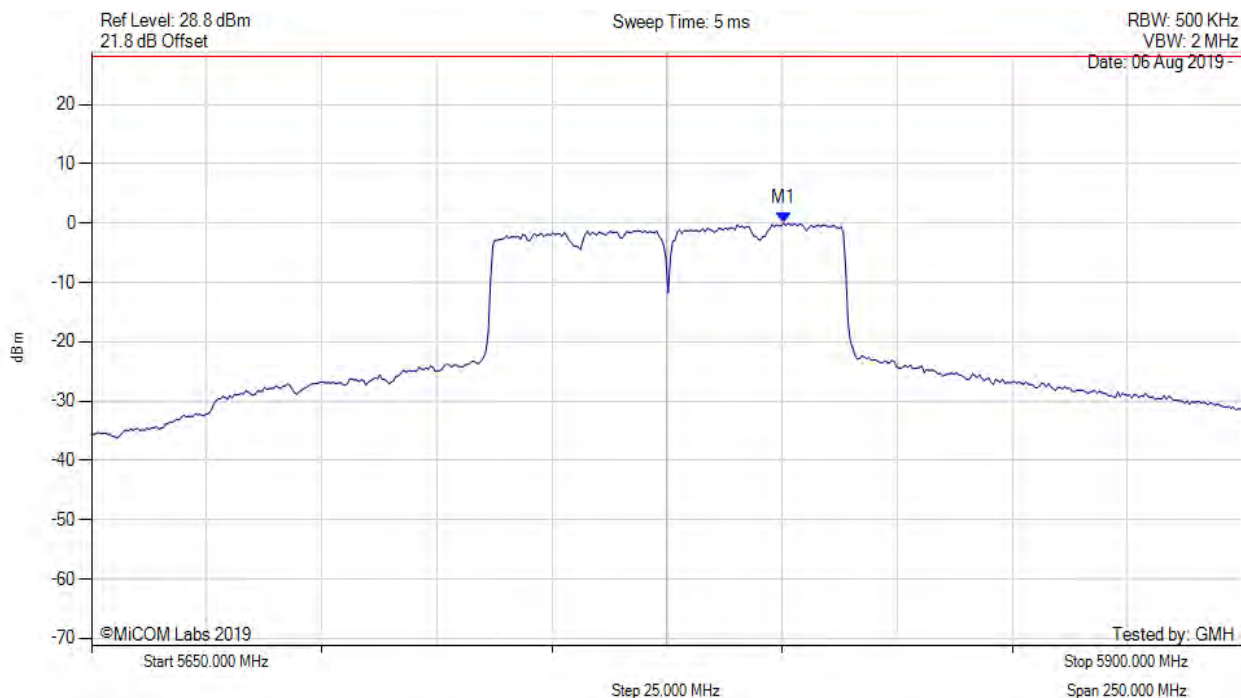


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5800.300 MHz : -0.013 dBm M1 + DCCF : 5800.300 MHz : 0.075 dBm Duty Cycle Correction Factor : +0.09 dB	Limit: ≤ 28.1 dBm Margin: -28.0 dB

[back to matrix](#)

POWER SPECTRAL DENSITY



Variant: 802.11n HT-20, Channel: 5745.00 MHz, Chain a, Temp: 20, Voltage: 55 Vdc

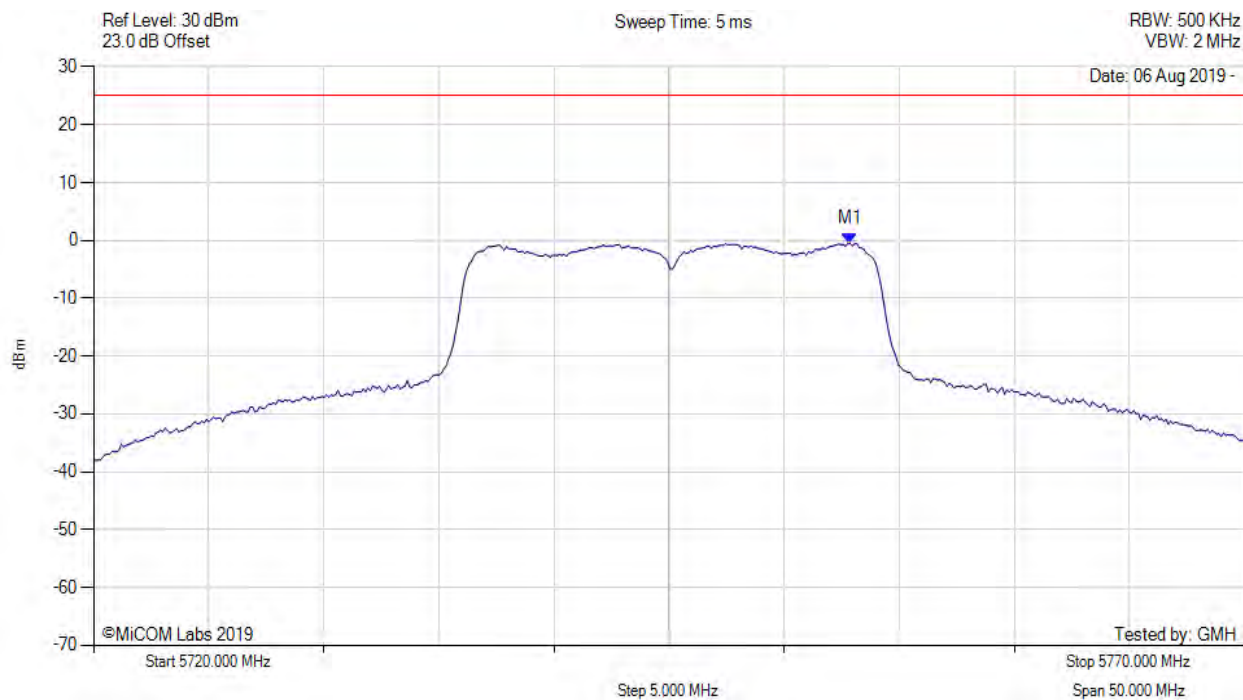


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5752.866 MHz : -0.538 dBm	Limit: ≤ 25.090 dBm

[back to matrix](#)

POWER SPECTRAL DENSITY



Variant: 802.11n HT-20, Channel: 5745.00 MHz, Chain b, Temp: 20, Voltage: 55 Vdc

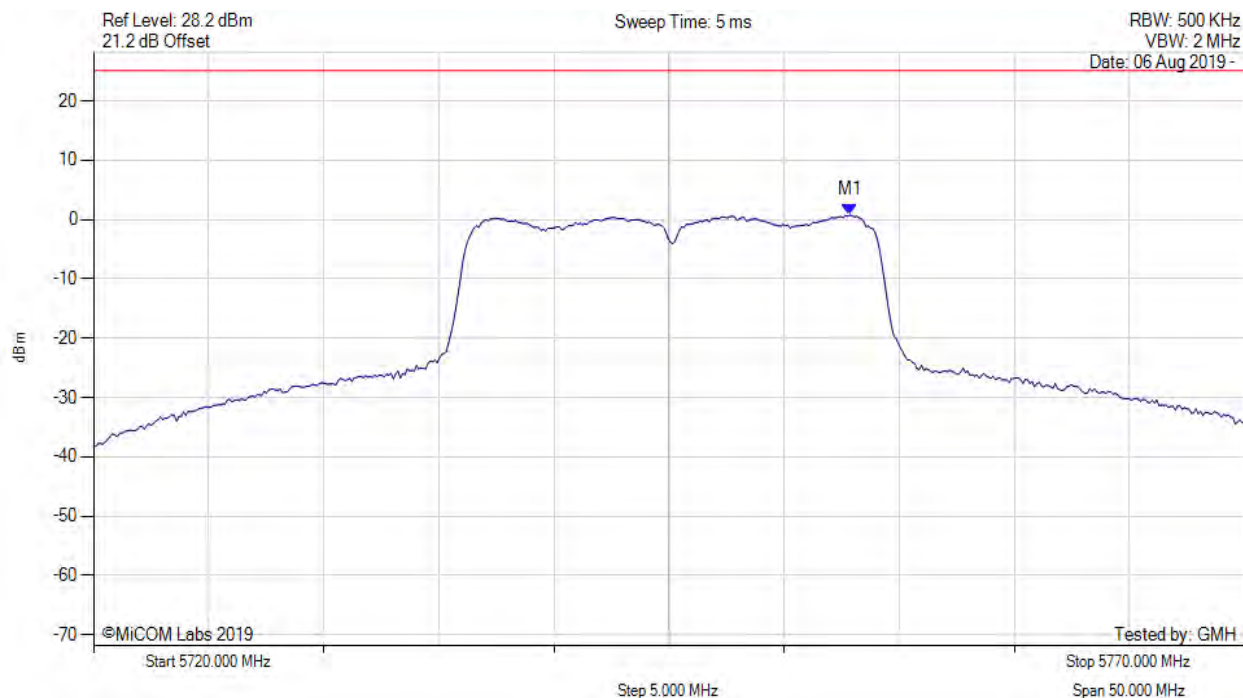


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5752.866 MHz : 0.776 dBm	Limit: ≤ 25.090 dBm

[back to matrix](#)

POWER SPECTRAL DENSITY



Variant: 802.11n HT-20, Channel: 5745.00 MHz, SUM, Temp: 20, Voltage: 55 Vdc

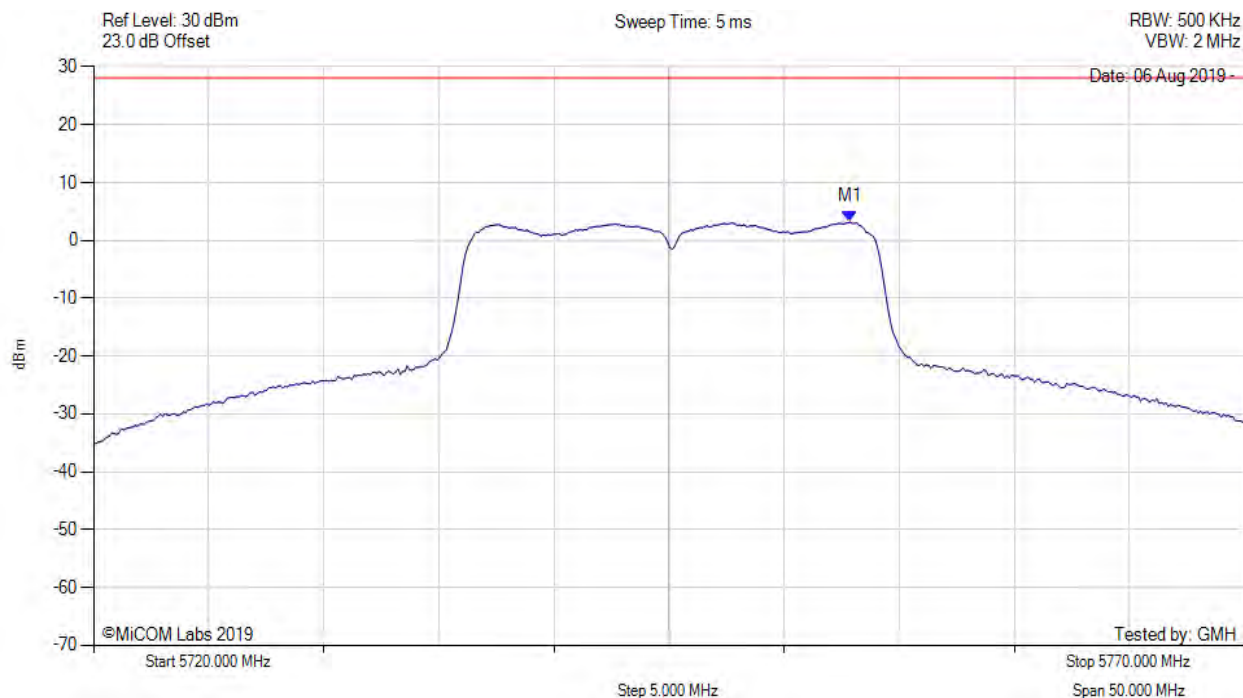


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5752.900 MHz : 3.179 dBm M1 + DCCF : 5752.900 MHz : 3.267 dBm Duty Cycle Correction Factor : +0.09 dB	Limit: ≤ 28.1 dBm Margin: -24.8 dB

[back to matrix](#)

POWER SPECTRAL DENSITY



Variant: 802.11n HT-20, Channel: 5785.00 MHz, Chain a, Temp: 20, Voltage: 55 Vdc

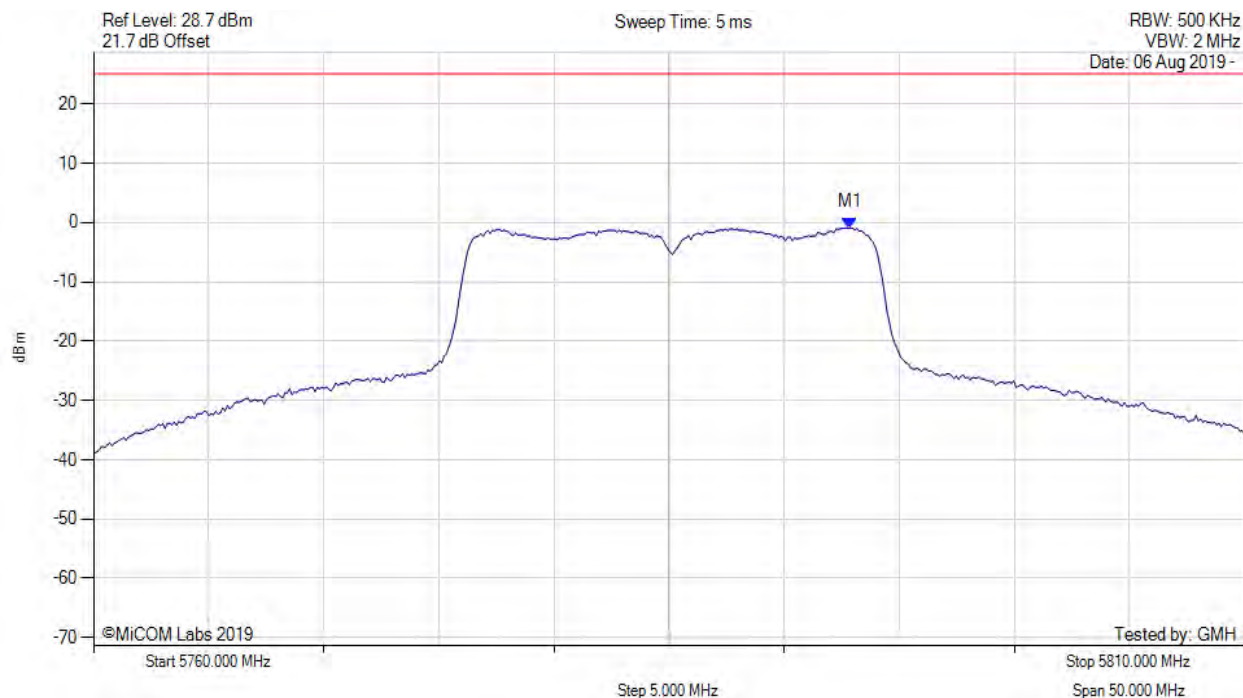


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5792.866 MHz : -0.897 dBm	Limit: ≤ 25.090 dBm

[back to matrix](#)

POWER SPECTRAL DENSITY



Variant: 802.11n HT-20, Channel: 5785.00 MHz, Chain b, Temp: 20, Voltage: 55 Vdc

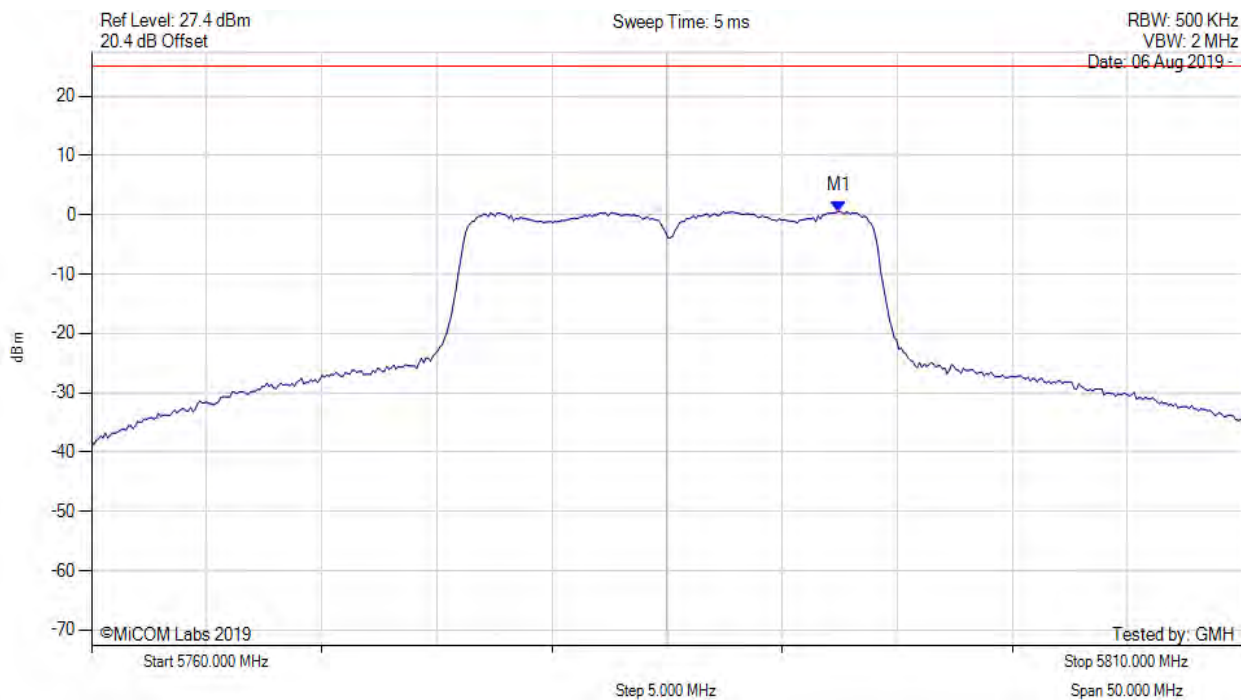


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5792.465 MHz : 0.600 dBm	Channel Frequency: 5785.00 MHz

[back to matrix](#)

POWER SPECTRAL DENSITY



Variant: 802.11n HT-20, Channel: 5785.00 MHz, SUM, Temp: 20, Voltage: 55 Vdc

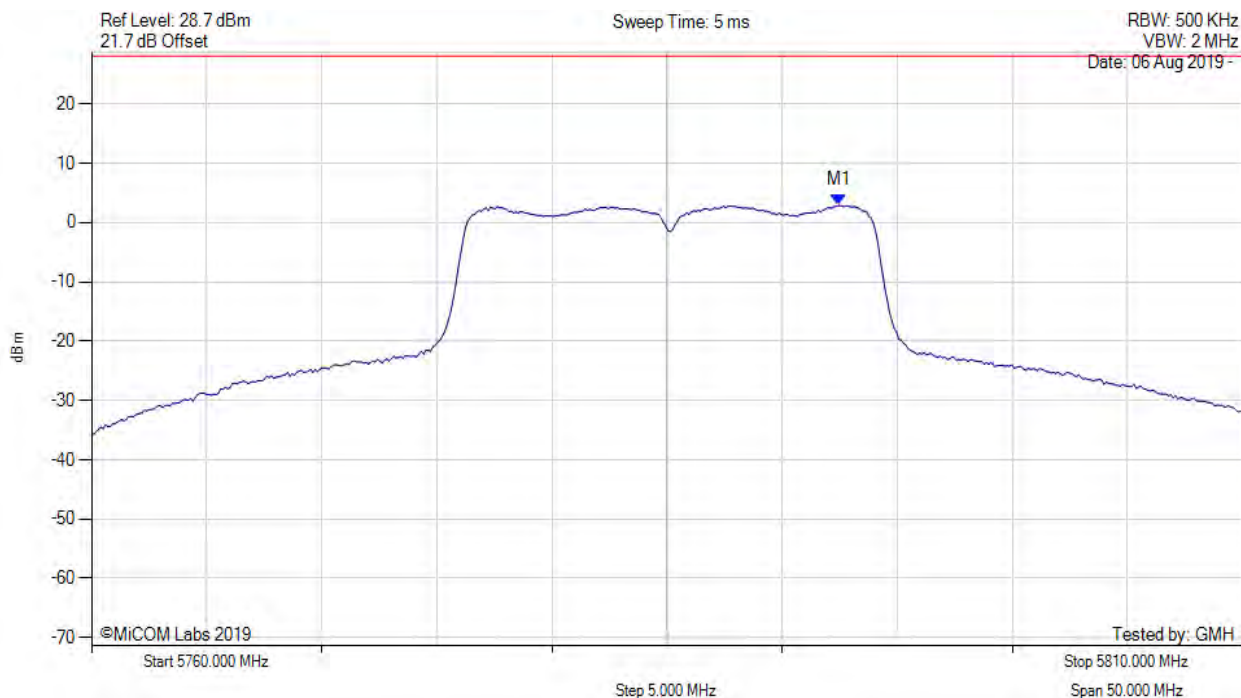


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5792.500 MHz : 2.877 dBm M1 + DCCF : 5792.500 MHz : 2.965 dBm Duty Cycle Correction Factor : +0.09 dB	Limit: ≤ 28.1 dBm Margin: -25.1 dB

[back to matrix](#)

POWER SPECTRAL DENSITY



Variant: 802.11n HT-20, Channel: 5825.00 MHz, Chain a, Temp: 20, Voltage: 55 Vdc

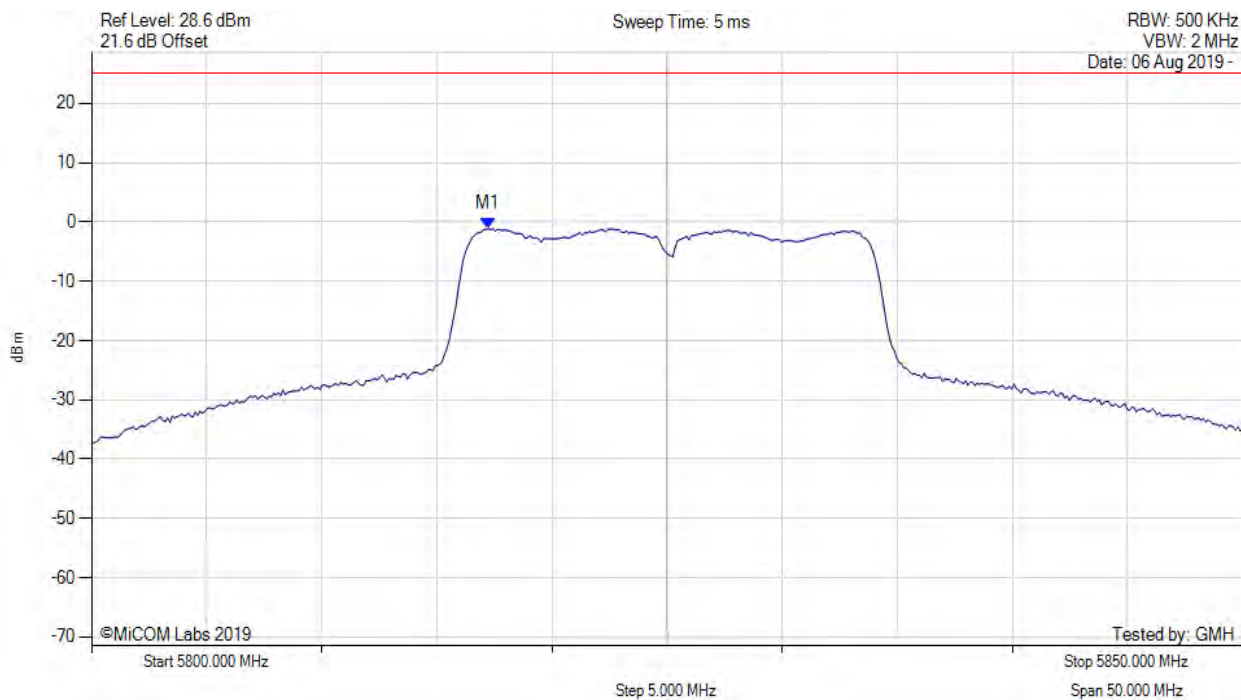


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5817.234 MHz : -1.137 dBm	Limit: ≤ 25.090 dBm

[back to matrix](#)

POWER SPECTRAL DENSITY



Variant: 802.11n HT-20, Channel: 5825.00 MHz, Chain b, Temp: 20, Voltage: 55 Vdc

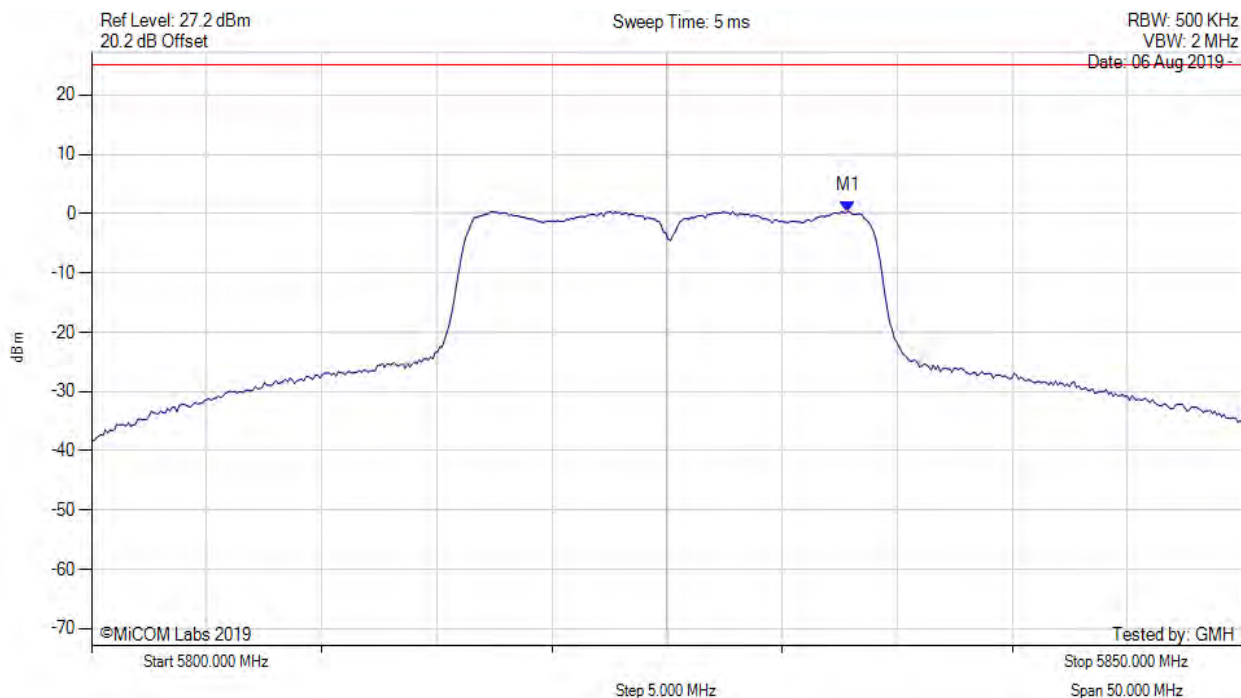


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5832.866 MHz : 0.412 dBm	Limit: ≤ 25.090 dBm

[back to matrix](#)

POWER SPECTRAL DENSITY



Variant: 802.11n HT-20, Channel: 5825.00 MHz, SUM, Temp: 20, Voltage: 55 Vdc

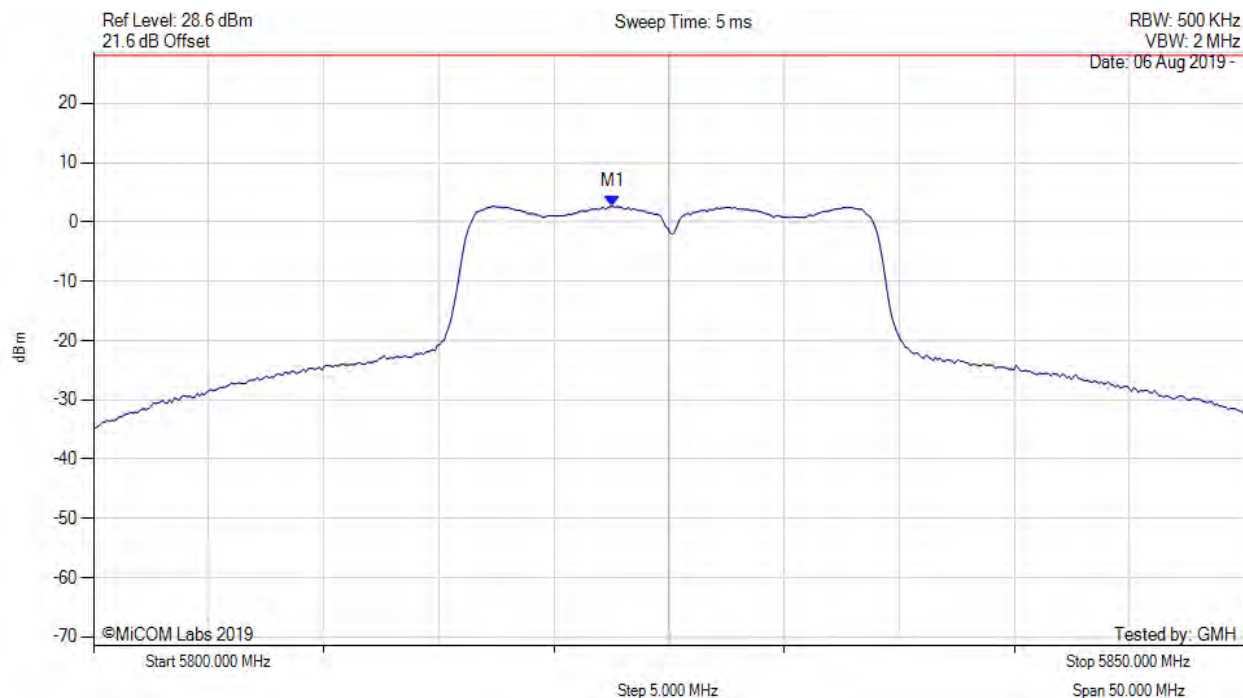


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5822.500 MHz : 2.644 dBm M1 + DCCF : 5822.500 MHz : 2.732 dBm Duty Cycle Correction Factor : +0.09 dB	Limit: ≤ 28.1 dBm Margin: -25.4 dB

[back to matrix](#)

POWER SPECTRAL DENSITY



Variant: 802.11n HT-40, Channel: 5755.00 MHz, Chain a, Temp: 20, Voltage: 55 Vdc

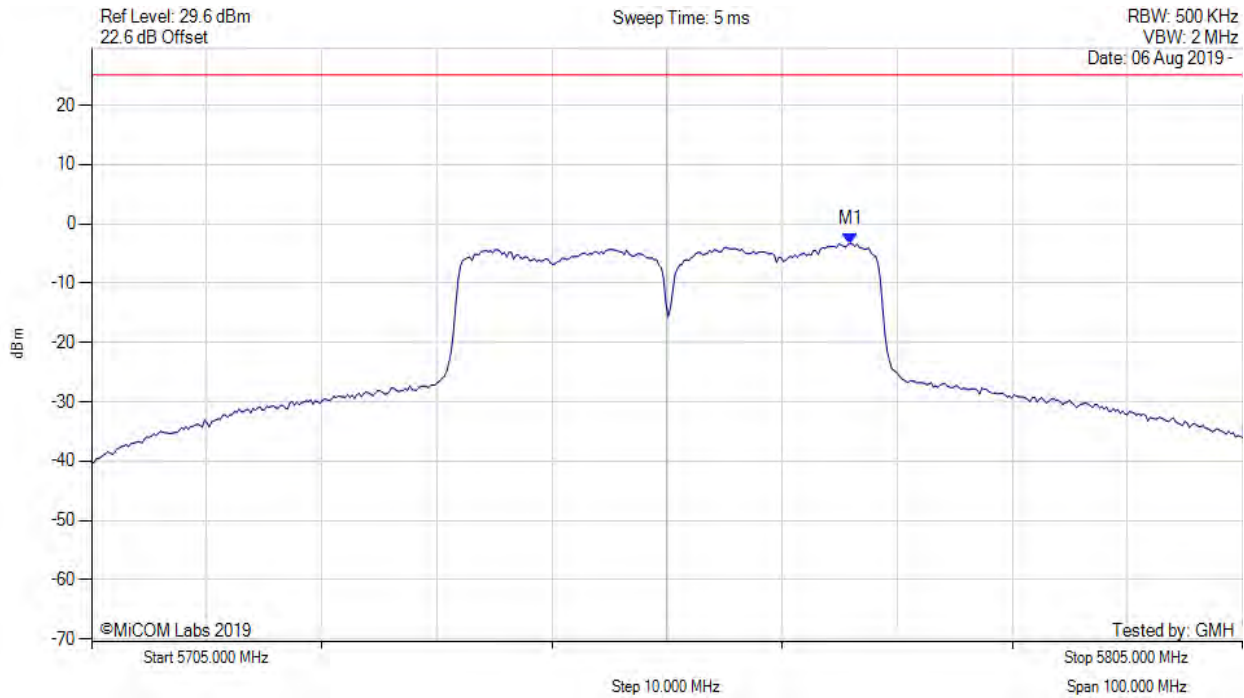


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5770.932 MHz : -3.331 dBm	Limit: ≤ 25.090 dBm

[back to matrix](#)

POWER SPECTRAL DENSITY



Variant: 802.11n HT-40, Channel: 5755.00 MHz, Chain b, Temp: 20, Voltage: 55 Vdc

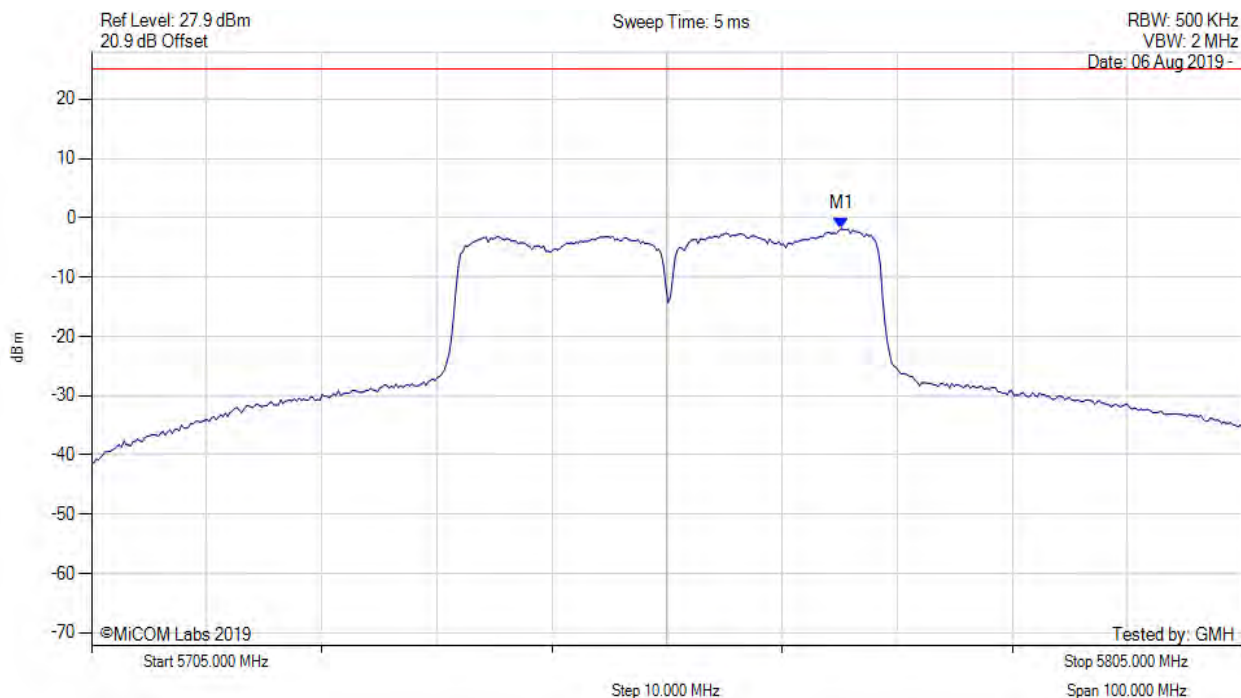


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5770.130 MHz : -1.869 dBm	Limit: ≤ 25.090 dBm

[back to matrix](#)

POWER SPECTRAL DENSITY



Variant: 802.11n HT-40, Channel: 5755.00 MHz, SUM, Temp: 20, Voltage: 55 Vdc

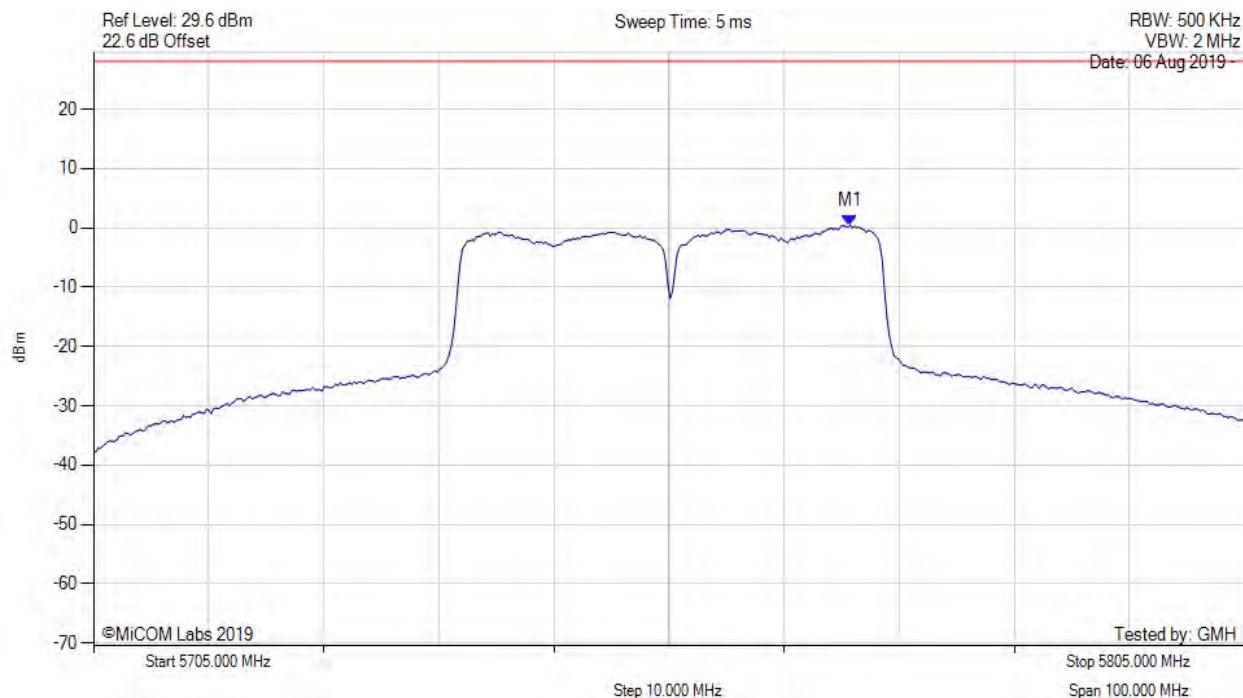


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5770.700 MHz : 0.398 dBm M1 + DCCF : 5770.700 MHz : 0.486 dBm Duty Cycle Correction Factor : +0.09 dB	Limit: ≤ 28.1 dBm Margin: -27.6 dB

[back to matrix](#)

POWER SPECTRAL DENSITY



Variant: 802.11n HT-40, Channel: 5795.00 MHz, Chain a, Temp: 20, Voltage: 55 Vdc

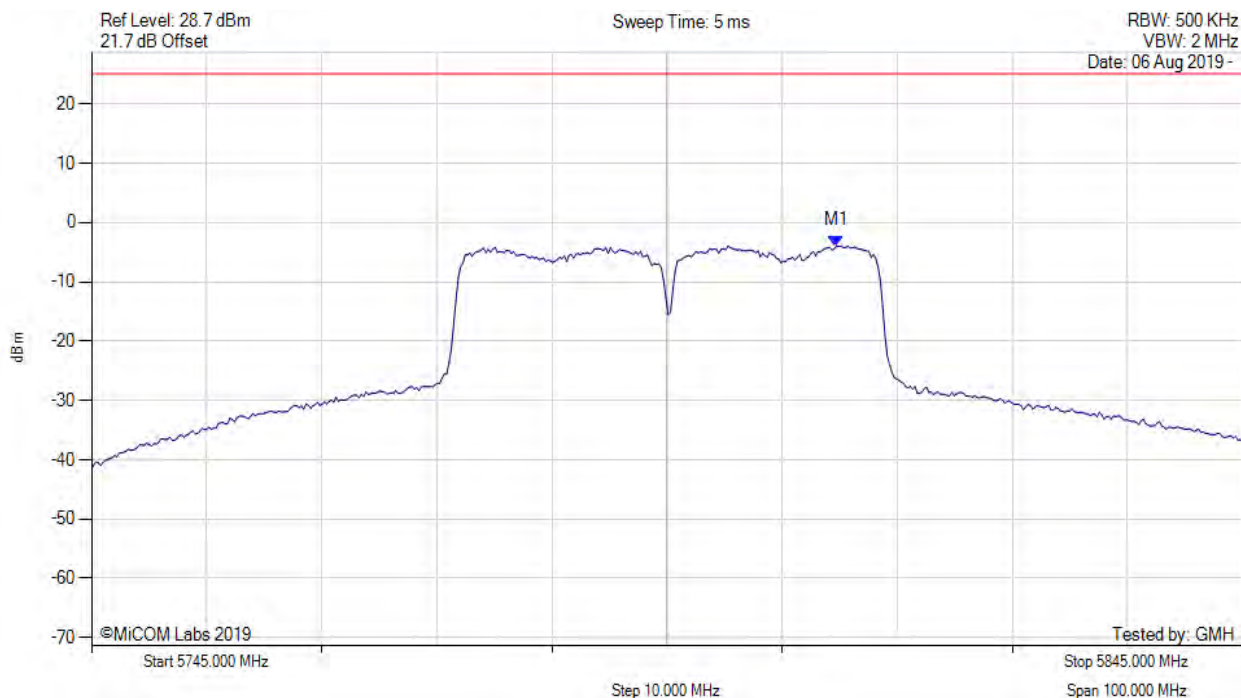


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5809.729 MHz : -3.940 dBm	Limit: ≤ 25.090 dBm

[back to matrix](#)

POWER SPECTRAL DENSITY



Variant: 802.11n HT-40, Channel: 5795.00 MHz, Chain b, Temp: 20, Voltage: 55 Vdc

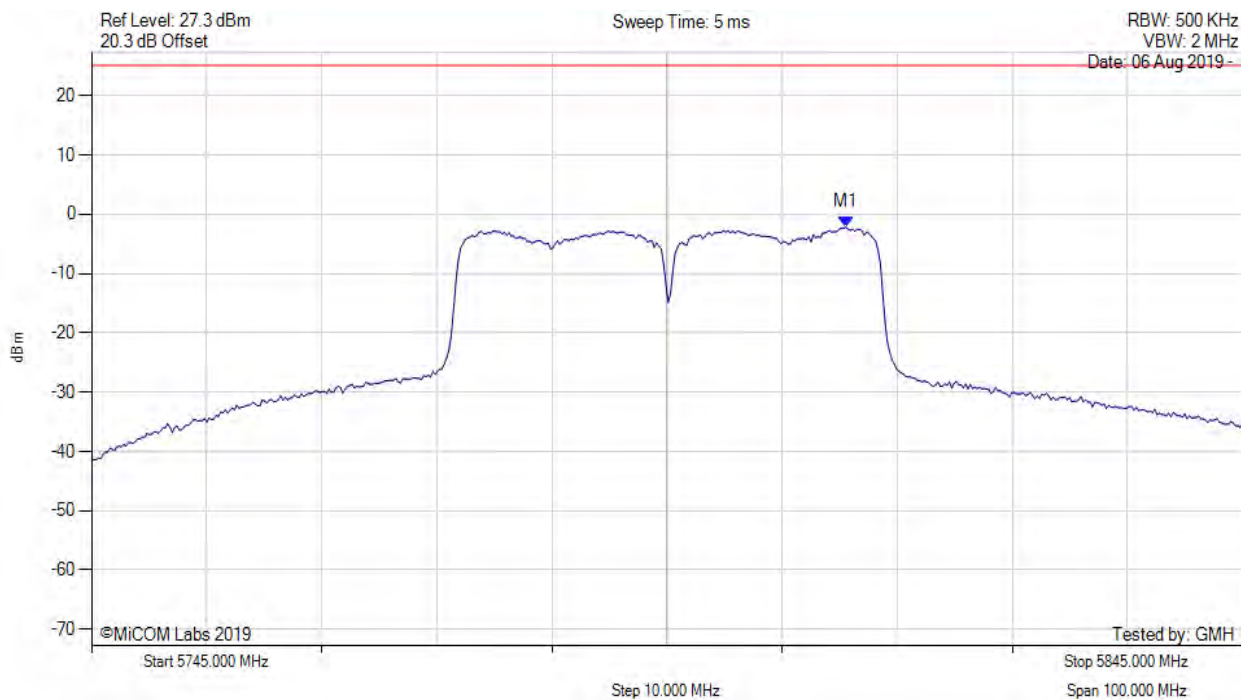

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5810.531 MHz : -2.196 dBm	Limit: ≤ 25.090 dBm

[back to matrix](#)