

測試頻道: IEEE 802.11ax (HEW20) /
5825 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna


測試距離: 3 米

檢測器: Peak/AV

測試日期: 108/08/03

環境溫度: 24°C

環境濕度: 52%

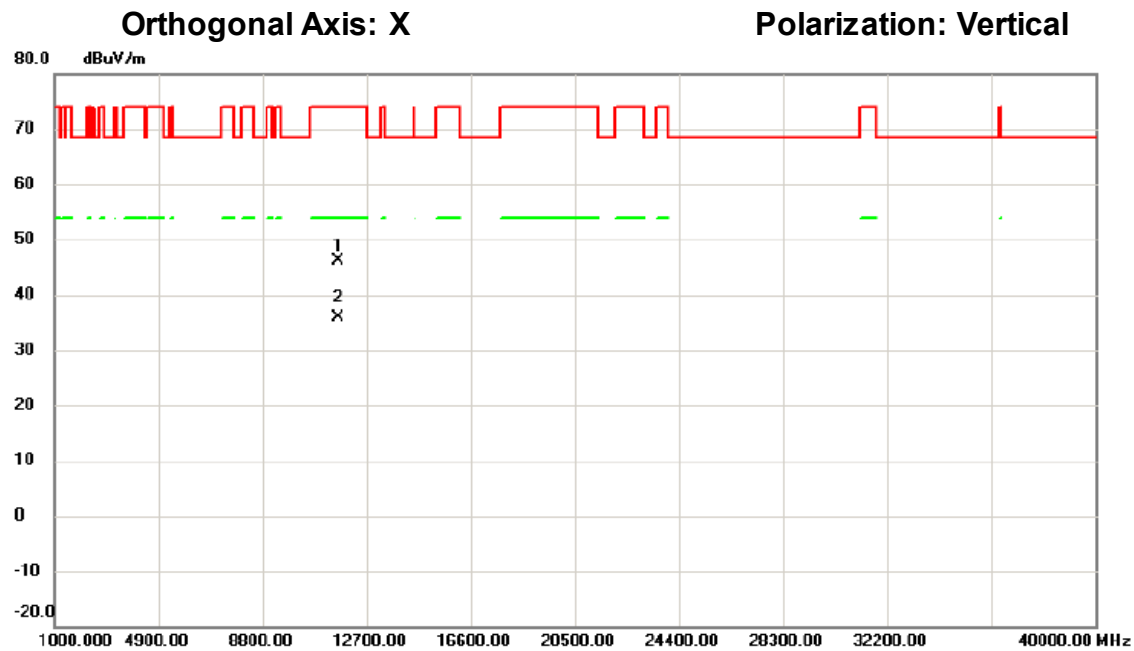

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11651.890	29.75	16.32	46.07	74.00	-27.93	peak	
2	*	11654.420	19.55	16.31	35.86	54.00	-18.14	AVG	

測試頻道: IEEE 802.11ax (HEW20) /
5825 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢測器: Peak/AV


測試日期: 108/08/01

環境溫度: 24°C

環境濕度: 52%

Orthogonal Axis: X

Polarization: Horizontal

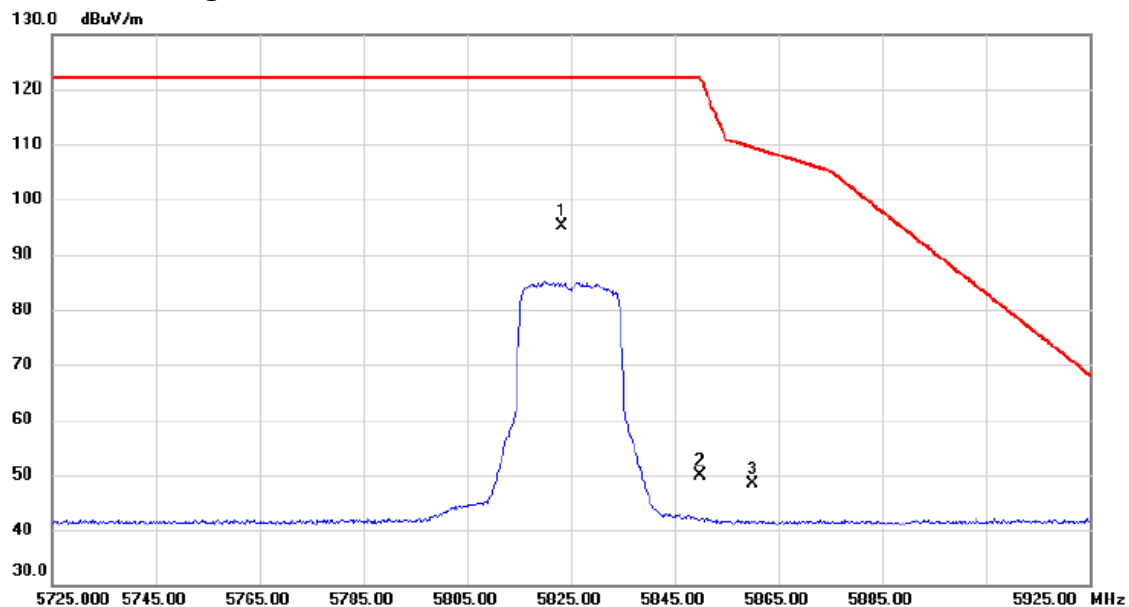

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	5823.300	79.76	15.39	95.15	122.20	-27.05	peak	主波訊號不予判定
2		5850.000	34.43	15.43	49.86	122.20	-72.34	peak	
3		5860.000	32.99	15.44	48.43	109.40	-60.97	peak	

測試頻道: IEEE 802.11ax (HEW20) /
5825 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna


測試距離: 3 米

檢測器: Peak/AV

測試日期: 108/08/03

環境溫度: 24°C

環境濕度: 52%

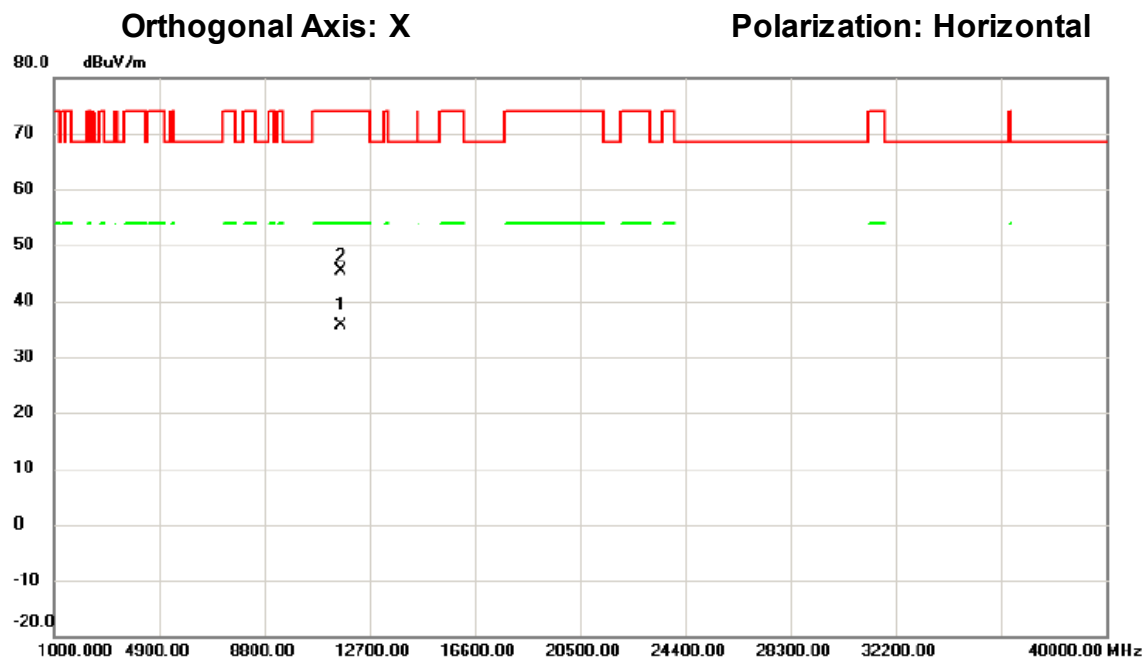

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	11640.650	19.26	16.34	35.60	54.00	-18.40	AVG	
2		11659.940	29.12	16.30	45.42	74.00	-28.58	peak	

測試頻道: IEEE 802.11ax (HEW40) /
5755 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢測器: Peak/AV


測試日期: 108/08/01

環境溫度: 24°C

環境濕度: 52%

Orthogonal Axis: X

Polarization: Vertical

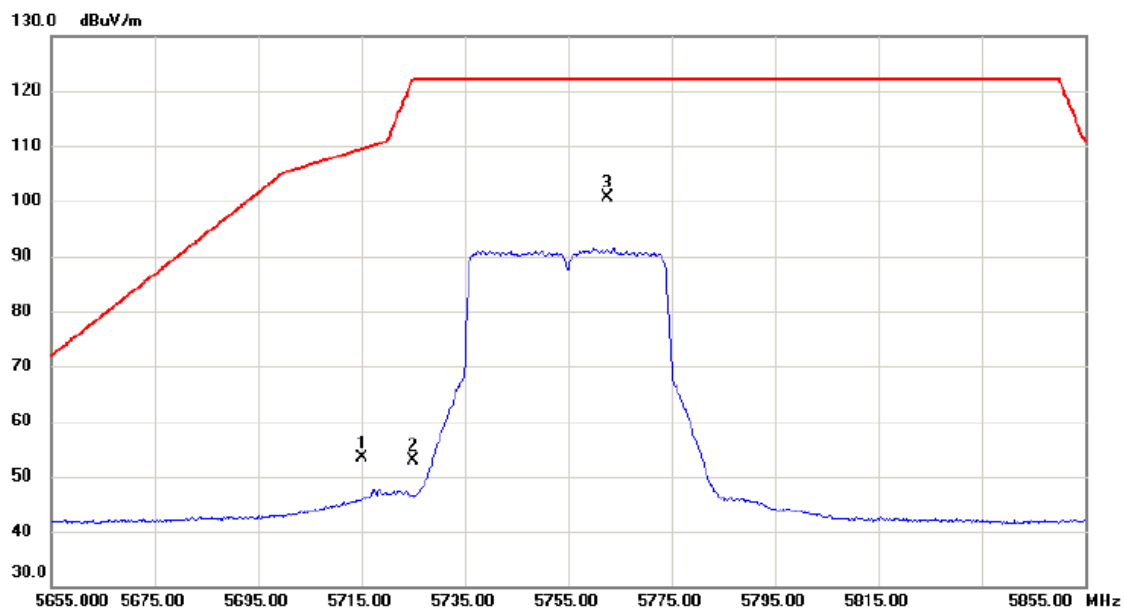

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		5715.000	38.16	15.26	53.42	109.40	-55.98	peak	
2		5725.000	37.55	15.27	52.82	122.20	-69.38	peak	
3	*	5762.500	85.31	15.32	100.63	122.20	-21.57	peak	主波訊號不予判定

測試頻道: IEEE 802.11ax (HEW40) /
5755 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna


測試距離: 3 米

檢測器: Peak/AV

測試日期: 108/08/03

環境溫度: 24°C

環境濕度: 52%

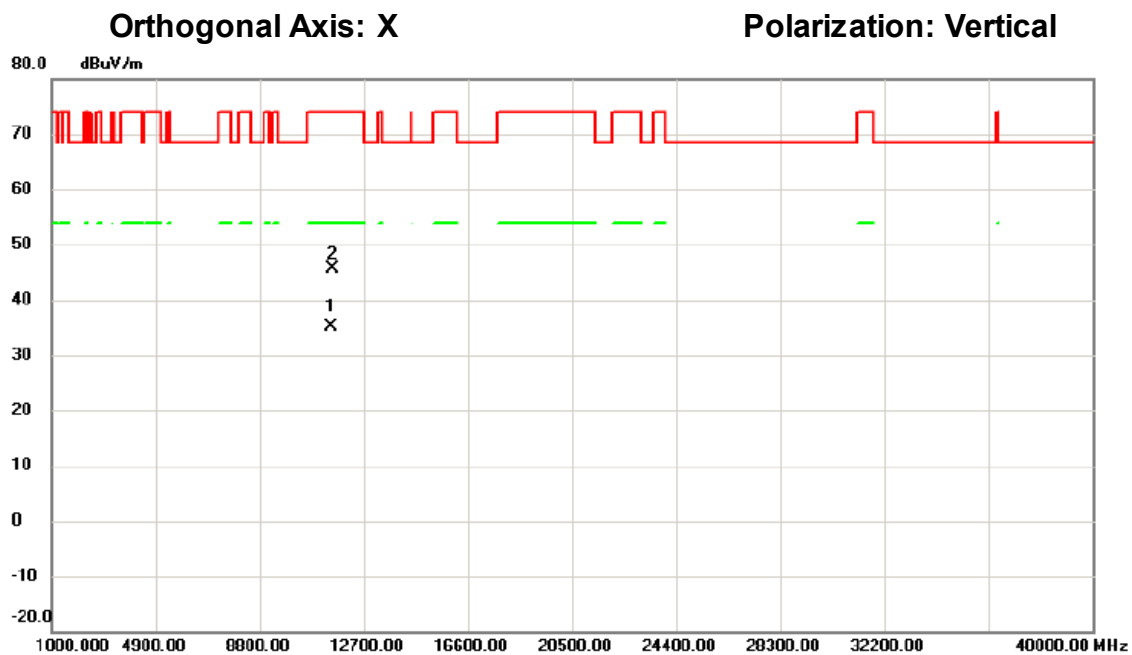

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	11501.290	18.30	16.75	35.05	54.00	-18.95	AVG	
2		11506.950	28.91	16.73	45.64	74.00	-28.36	peak	

測試頻道: IEEE 802.11ax (HEW40) /
5755 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna


測試距離: 3 米

檢測器: Peak/AV

測試日期: 108/08/01

環境溫度: 24°C

環境濕度: 52%

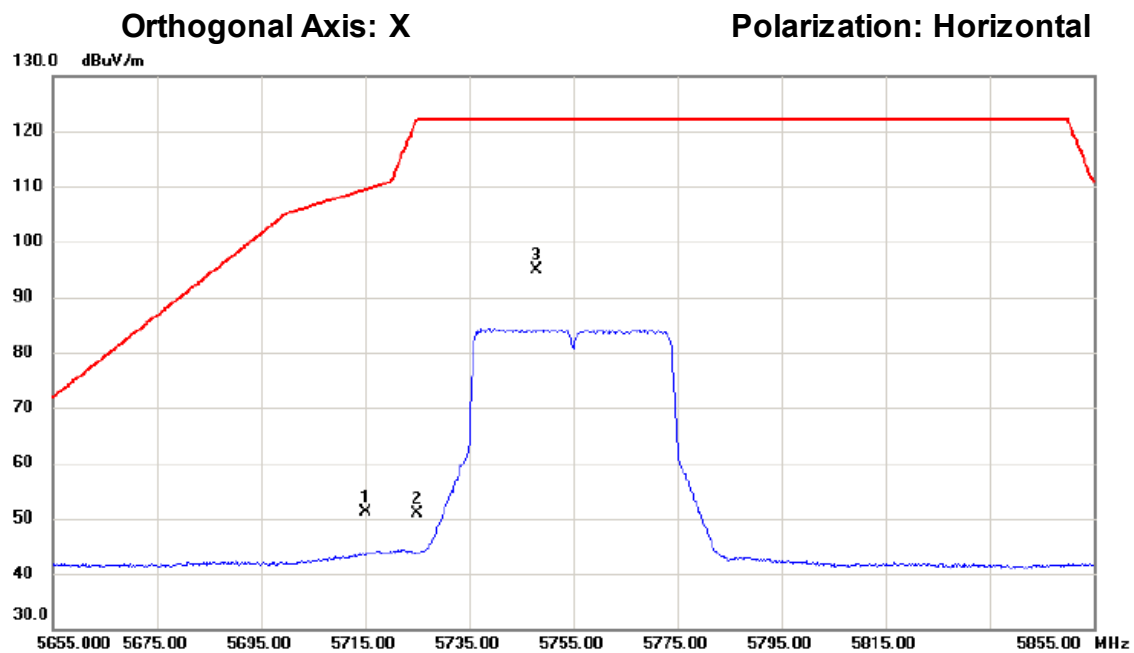

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		5715.000	35.99	15.26	51.25	109.40	-58.15	peak	
2		5725.000	35.51	15.27	50.78	122.20	-71.42	peak	
3	*	5747.900	79.50	15.30	94.80	122.20	-27.40	peak	主波訊號不予判定

測試頻道: IEEE 802.11ax (HEW40) /
5755 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna


測試距離: 3 米

檢測器: Peak/AV

測試日期: 108/08/03

環境溫度: 24°C

環境濕度: 52%

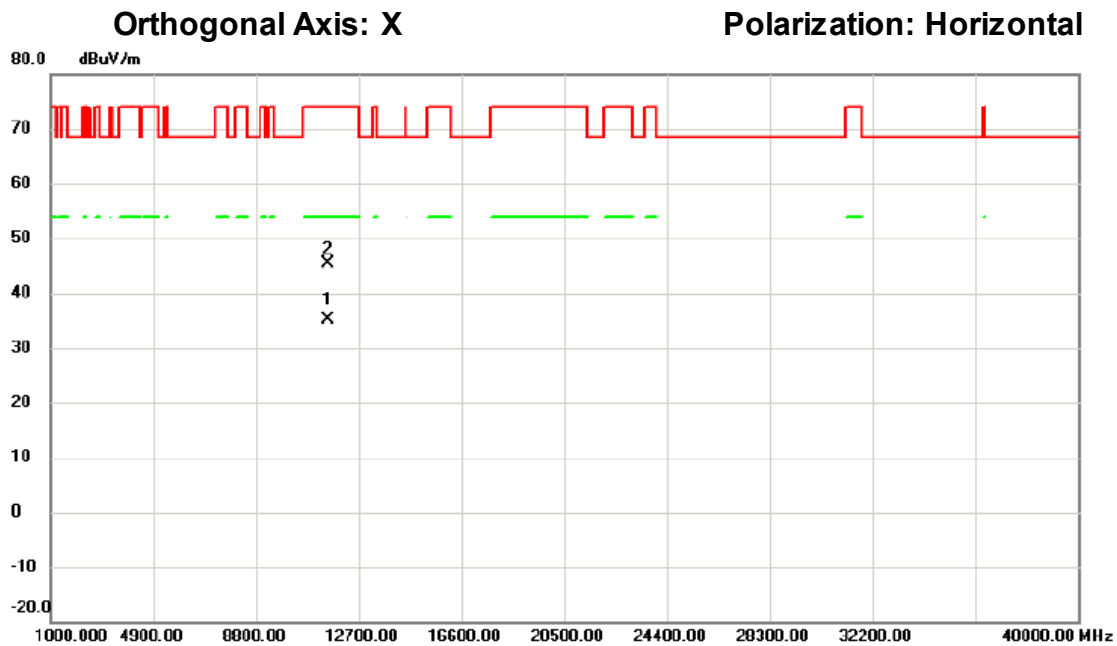

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	11505.780	18.37	16.73	35.10	54.00	-18.90	AVG	
2		11513.990	28.61	16.70	45.31	74.00	-28.69	peak	

測試頻道: IEEE 802.11ax (HEW40) /
5795 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢測器: Peak/AV


測試日期: 108/08/01

環境溫度: 24°C

環境濕度: 52%

Orthogonal Axis: X

Polarization: Vertical

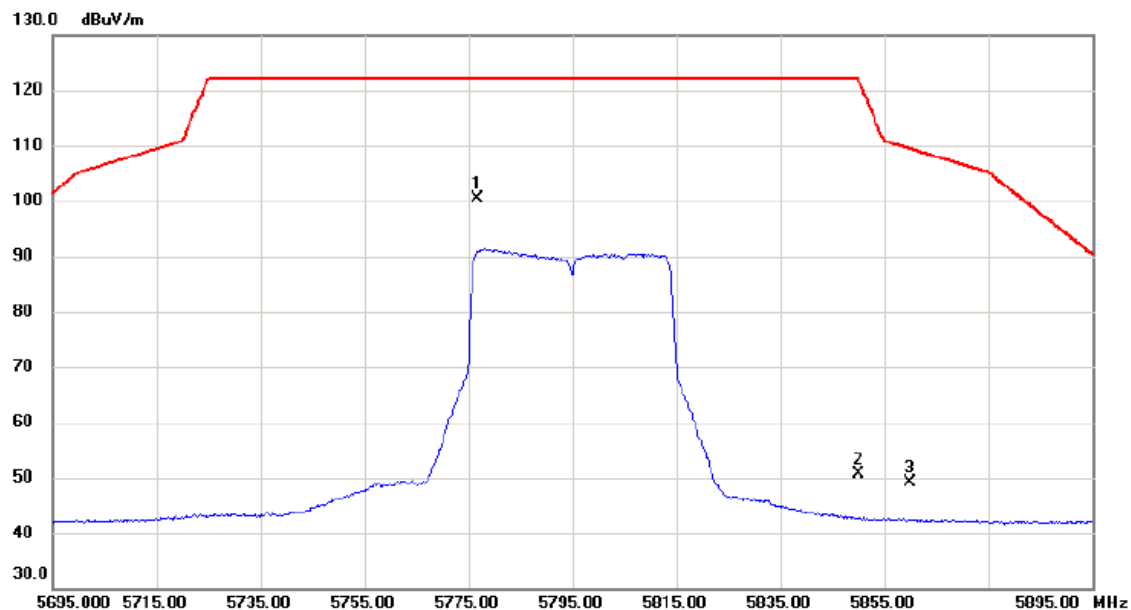

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	5776.600	85.01	15.34	100.35	122.20	-21.85	peak	主波訊號不予判定
2		5850.000	35.13	15.43	50.56	122.20	-71.64	peak	
3		5860.000	33.81	15.44	49.25	109.40	-60.15	peak	

測試頻道: IEEE 802.11ax (HEW40) /
5795 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna


測試距離: 3 米

檢測器: Peak/AV

測試日期: 108/08/03

環境溫度: 24°C

環境濕度: 52%

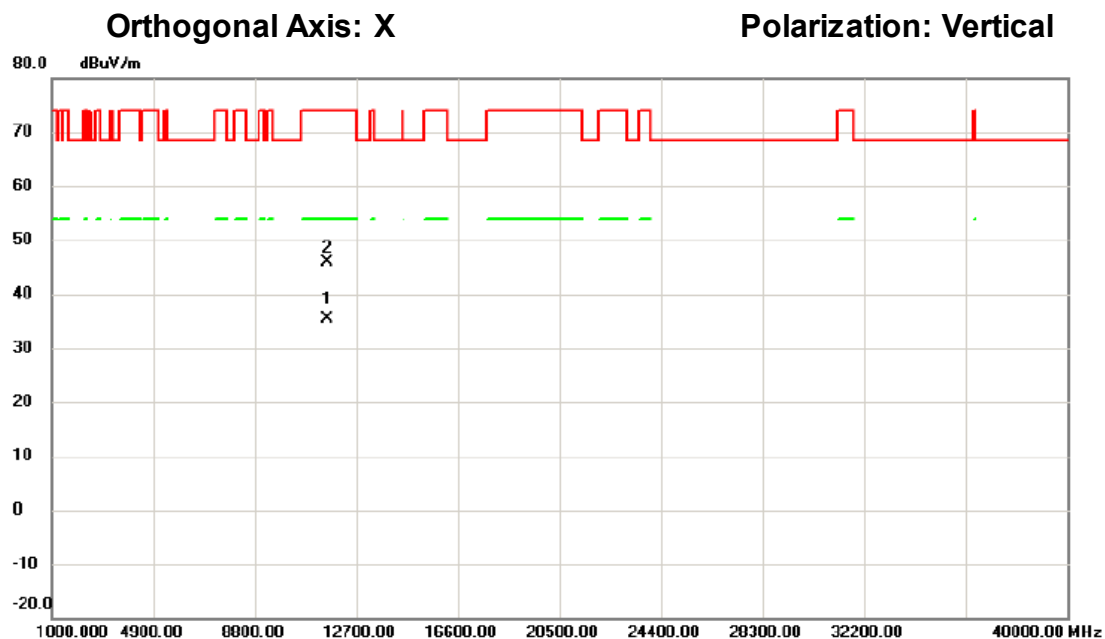

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	11583.040	18.76	16.51	35.27	54.00	-18.73	AVG	
2		11586.850	29.38	16.50	45.88	74.00	-28.12	peak	

測試頻道: IEEE 802.11ax (HEW40) /
5795 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢測器: Peak/AV


測試日期: 108/08/01

環境溫度: 24°C

環境濕度: 52%

Orthogonal Axis: X

Polarization: Horizontal

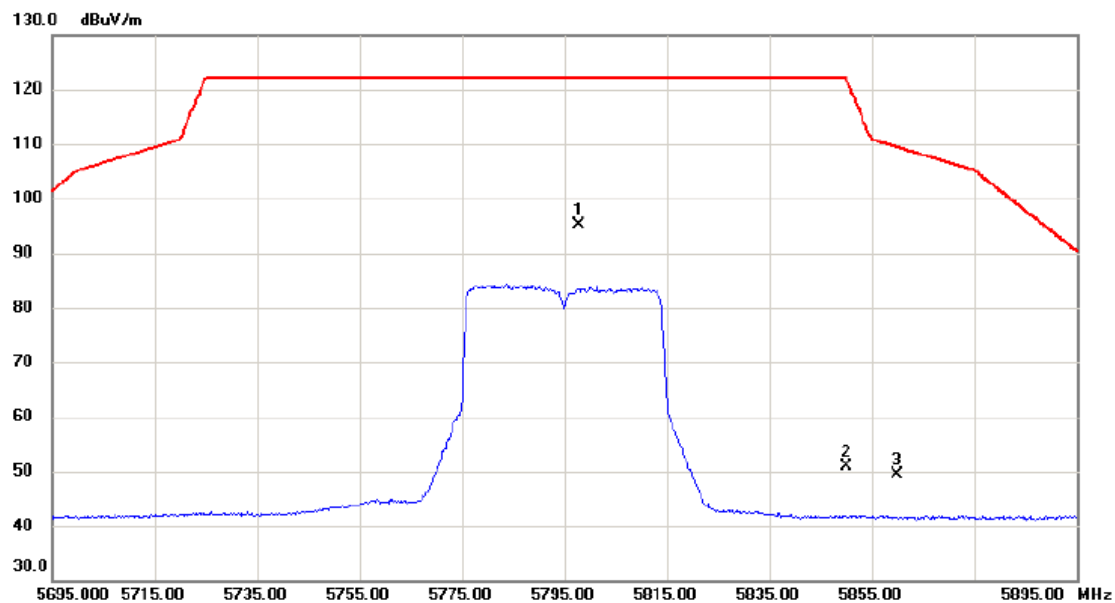

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	5797.900	79.73	15.37	95.10	122.20	-27.10	peak	主波訊號不予判定
2		5850.000	35.38	15.43	50.81	122.20	-71.39	peak	
3		5860.000	33.91	15.44	49.35	109.40	-60.05	peak	

測試頻道: IEEE 802.11ax (HEW40) /
5795 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna


測試距離: 3 米

檢測器: Peak/AV

測試日期: 108/08/03

環境溫度: 24°C

環境濕度: 52%

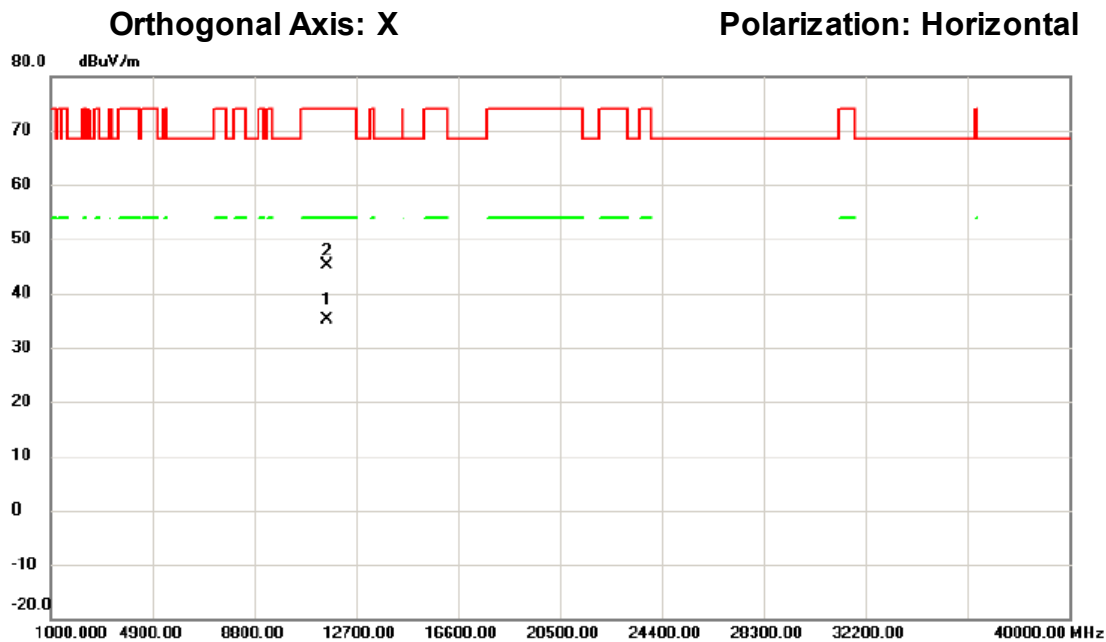

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	11581.580	18.62	16.52	35.14	54.00	-18.86	AVG	
2		11598.420	28.77	16.47	45.24	74.00	-28.76	peak	

測試頻道: IEEE 802.11ax (HEW80) /
5775 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢測器: Peak/AV


測試日期: 108/08/01

環境溫度: 24°C

環境濕度: 52%

Orthogonal Axis: X

Polarization: Vertical

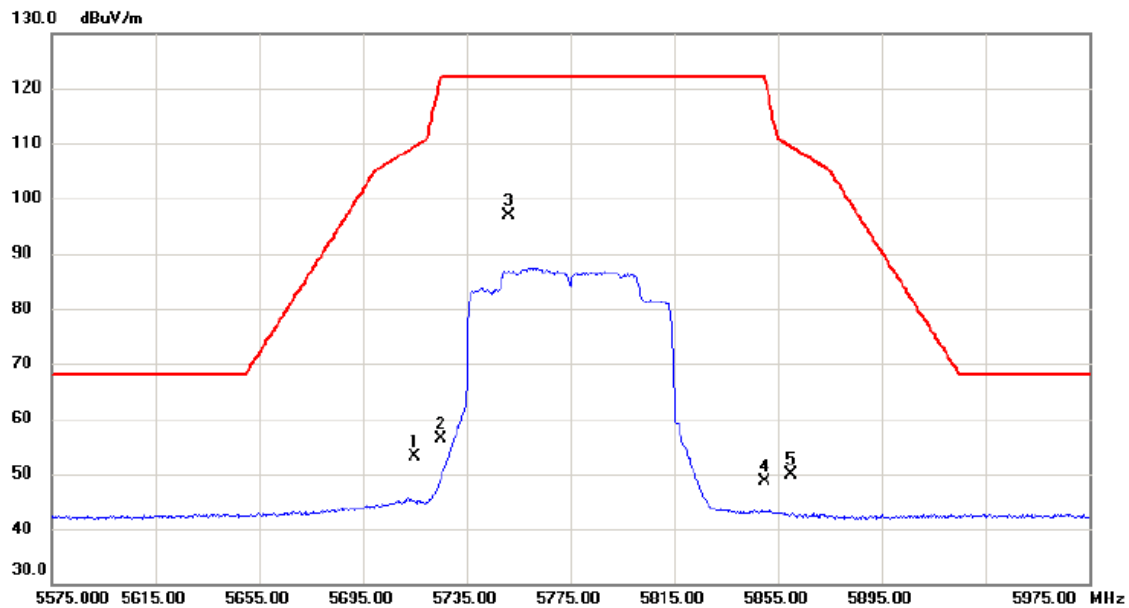

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5715.000	37.77	15.26	53.03	109.40	-56.37	peak	
2		5725.000	41.02	15.27	56.29	122.20	-65.91	peak	
3	*	5751.000	81.48	15.30	96.78	122.20	-25.42	peak	主波訊號不予判定
4		5850.000	33.25	15.43	48.68	122.20	-73.52	peak	
5		5860.000	34.52	15.44	49.96	109.40	-59.44	peak	

測試頻道: IEEE 802.11ax (HEW80) /
5775 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna


測試距離: 3 米

檢測器: Peak/AV

測試日期: 108/08/03

環境溫度: 24°C

環境濕度: 52%

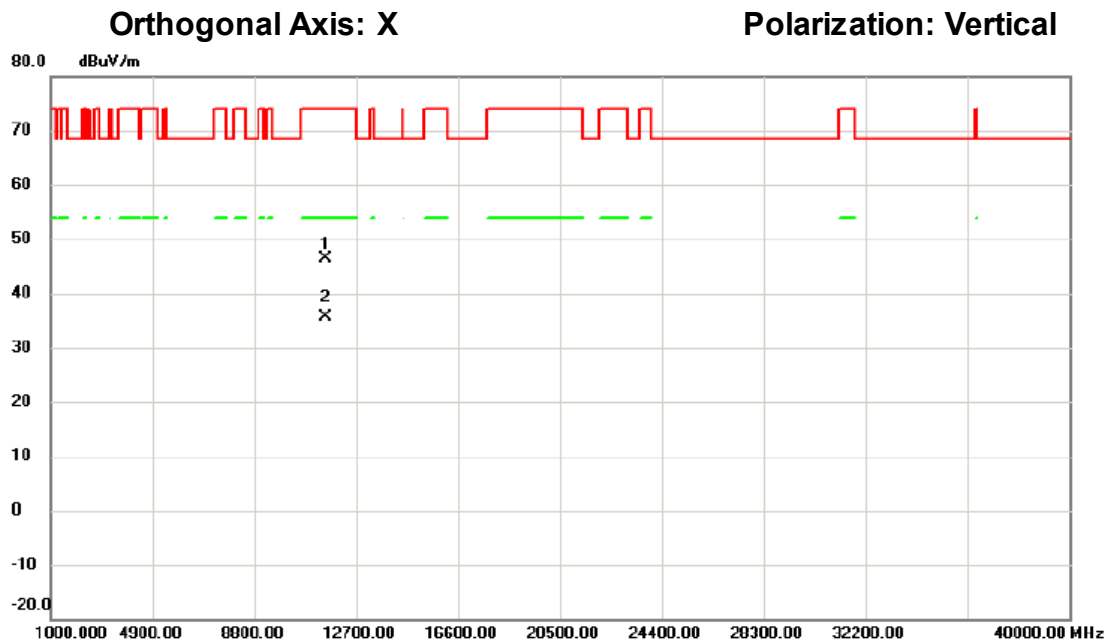

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11543.160	29.78	16.63	46.41	74.00	-27.59	peak	
2 *		11544.810	19.04	16.62	35.66	54.00	-18.34	AVG	

測試頻道: IEEE 802.11ax (HEW80) /
5775 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢測器: Peak/AV


測試日期: 108/08/01

環境溫度: 24°C

環境濕度: 52%

Orthogonal Axis: X

Polarization: Horizontal

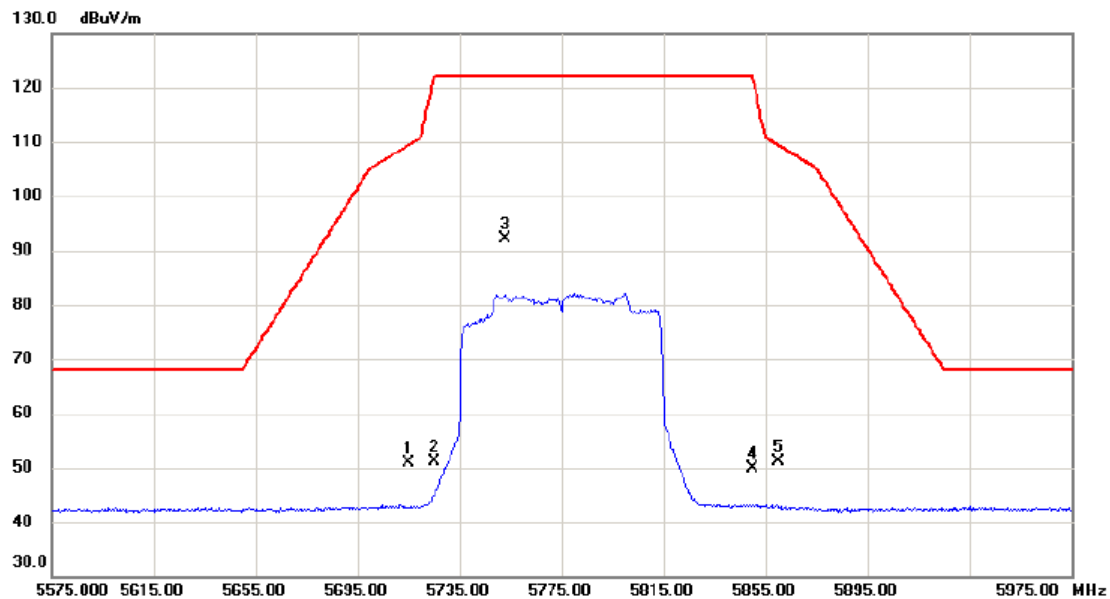

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5715.000	35.61	15.26	50.87	109.40	-58.53	peak	
2		5725.000	35.93	15.27	51.20	122.20	-71.00	peak	
3	*	5752.800	76.78	15.30	92.08	122.20	-30.12	peak	主波訊號不予判定
4		5850.000	34.54	15.43	49.97	122.20	-72.23	peak	
5		5860.000	35.73	15.44	51.17	109.40	-58.23	peak	

測試頻道: IEEE 802.11ax (HEW80) /
5775 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna


測試距離: 3 米

檢測器: Peak/AV

測試日期: 108/08/03

環境溫度: 24°C

環境濕度: 52%

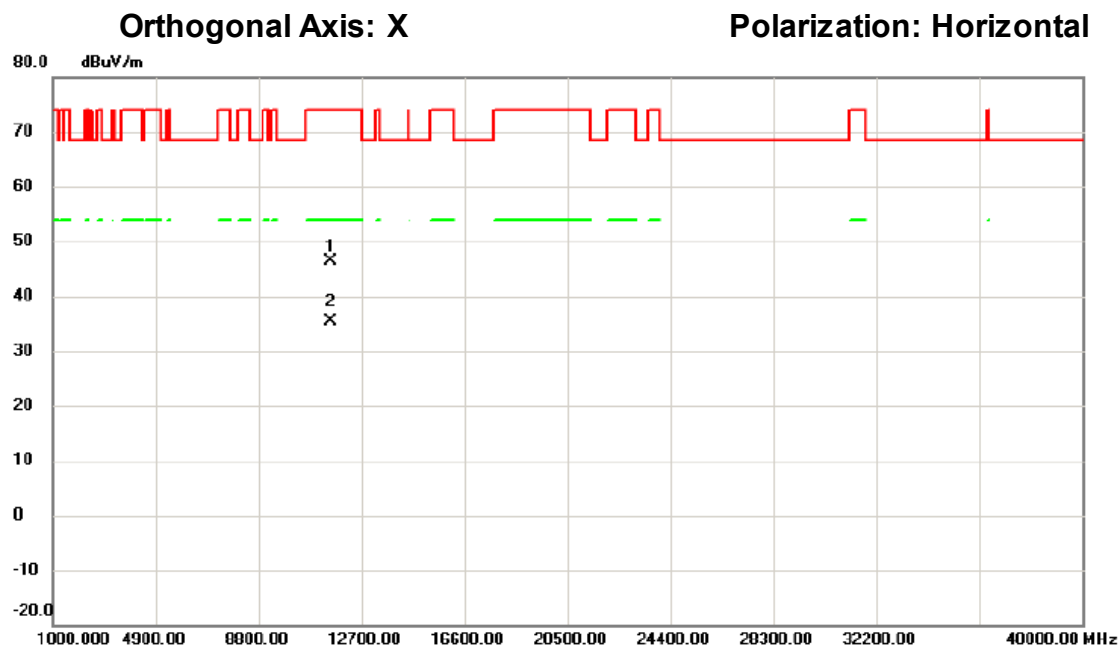

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11554.810	29.77	16.60	46.37	74.00	-27.63	peak	
2	*	11555.810	18.81	16.59	35.40	54.00	-18.60	AVG	

測試頻道: IEEE 802.11ac (VHT20) / 5580 MHz

測試模式: 接收

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna


測試距離: 3 米

檢測器: Peak/AV

測試日期: 108/08/01

環境溫度: 24°C


環境濕度: 52%

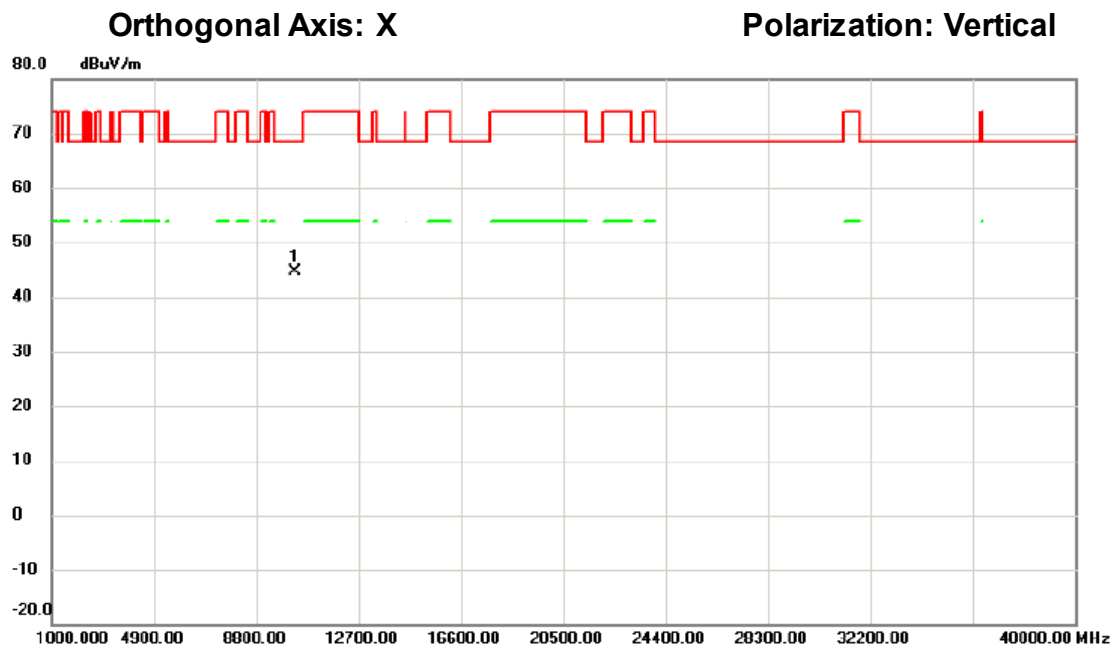

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10293.450	30.76	13.91	44.67	68.30	-23.63	peak	

測試頻道: IEEE 802.11ac (VHT20) / 5580 MHz
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢測器: Peak/AV
環境溫度: 24°C

測試模式: 接收
視頻頻寬: 1000 kHz / 10 Hz
測試距離: 3 米
測試日期: 108/08/01
環境濕度: 52%

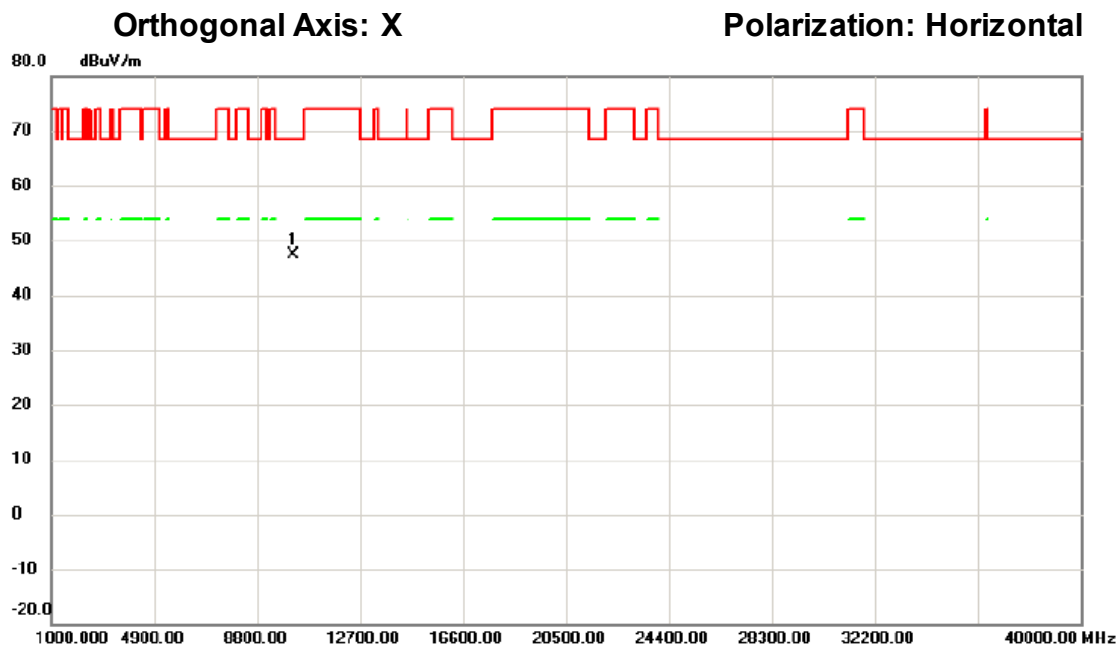

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10187.692	33.87	13.55	47.42	68.30	-20.88	peak	