

承 认 书

APPROVAL SHEET

供应商名称: 云希科技有限公司

客户名称: 深圳海兰电子有限公司

海兰料号: 001030616

物料品名: WIFI 天线

供应商料号: F1216D-1D24B-480-A/F1216D-1D24G-480-A

供应商联系人: 王 念

供应商地址: 深圳市宝安区西乡街道固戍上围园新园工业园A1栋3楼

制作日期: 2023-09-08

签章	海兰确认	签章	供应商确认

深圳海兰电子有限公司

ADD: 深圳市 光明新区 马田街道 合水口社区 中鹏程工业园 02 栋 2 楼

WEB: www.hailan.cn

TEL: 0755-29772781

目 录

一、封面.....	1
二、目录.....	2
三、BOM表.....	3
四、实物示意图.....	4
五、工程规格参数.....	5
六、检测记录.....	6
七、材质证明.....	7
八、包装示意图.....	8
九、变更记录.....	9
十、可靠性测试报告.....	10

目 录

封面.....	1
目录.....	2
一 概述	3
二 匹配电路图、机器图、天线图.....	3-4
三 回波损耗、效率.....	5-7
四 结构图纸	8-9

一：概述

- This approval sheet supports for MID project. FPC antennas include in this project. This report is for the performance of WLAN antenna.
- Antenna shape size: Meet the requirement of MID
- Antenna band: 2400MHz~2500MHz,5150MHz-5850MHz
- Antenna material: Antenna material meet the requirement of MID
- Adhesive performance: Adhesive performance meet the requirement of MID
- Antenna performance meet the spec below:


Description	2.4GHz~2.5GHz, 5.15G—5.85G	Units
VSWR	≤ 2.0	
Average Antenna Gain	≥ -4.5	dB
Antenna Efficiency	≥ 40	%
Feed Impedance	50 ohms	
Operating Temperature	-40 to +85 deg C	
Polarization / Azimuth	Linear / Omni-directional	

● Mechanical Information

Mechanical Dimension	
Cable Length	480mm/Black/Gray
Description	WLAN antenna
Material	FPC
Coaxial Cable	50Ohm/O.D.0.81mm
Environmental	
Operation Temperature	-40 to +85 deg C
Storage Temperature	-40 to +85 deg C


二：匹配电路图、机器图片、天线图片

2.1匹配电路图

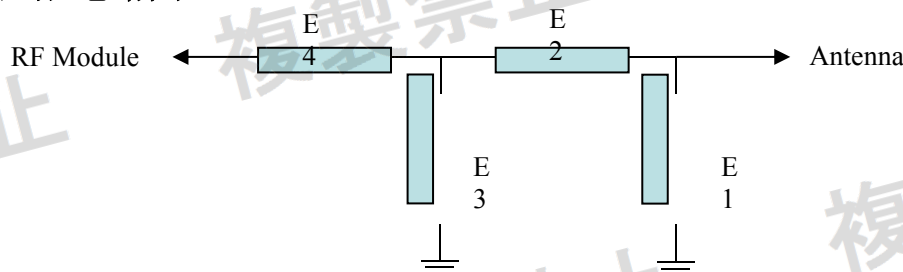

我司未对天线匹配做修改


2.1 机器图片、天线图片

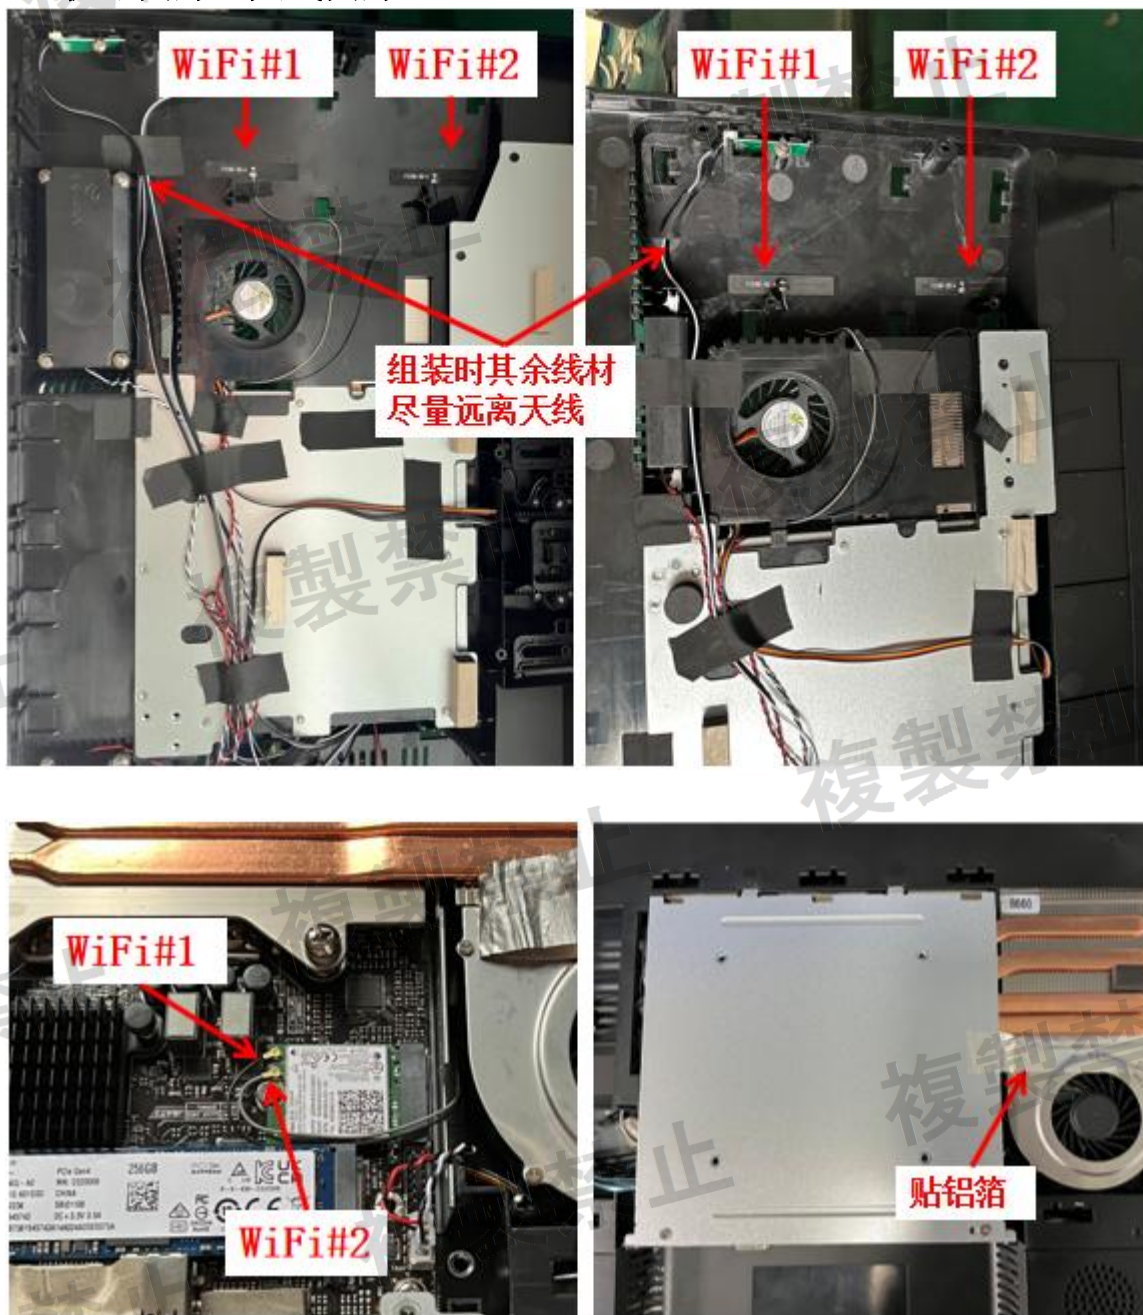


三：驻波比（VSWR）、效率

3.1 驻波比

WiFi#1

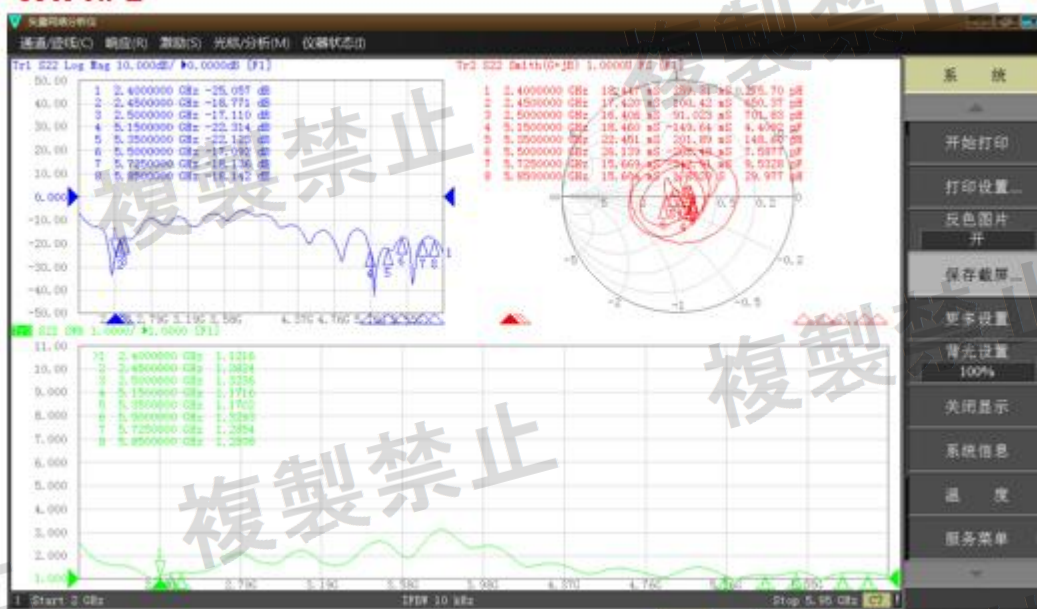

WiFi#2

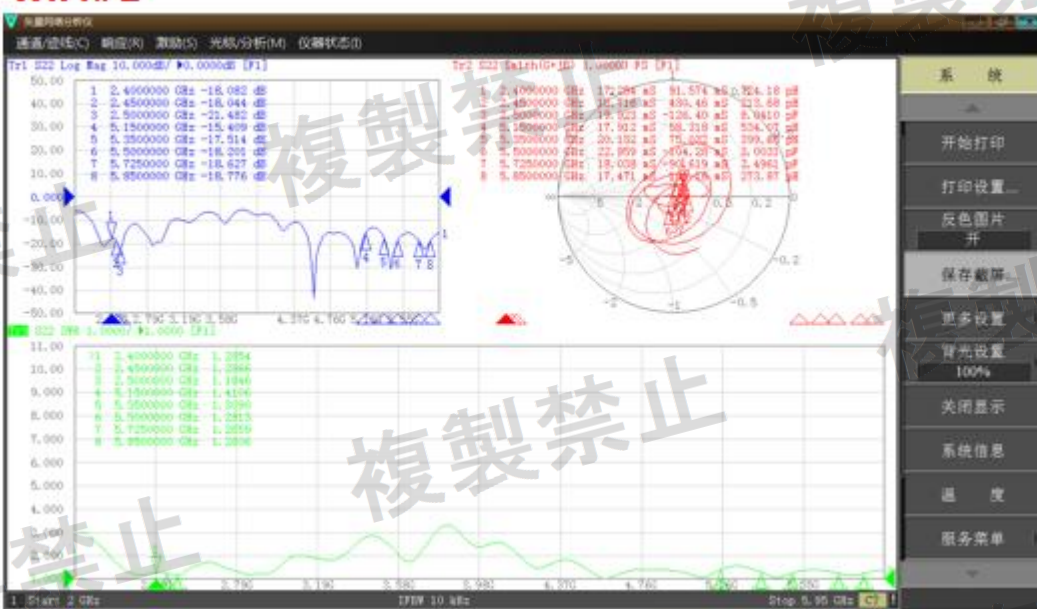

3.2. 效率、增益

Passive Test For WIFI#1			
Freq (MHz)	Effi (%)	Effi (dB)	Gain (dBi)
2400	50.1	-3.0	2.3
2410	50.3	-3.0	2.4
2420	51.1	-2.9	2.5
2430	52.2	-2.8	2.2
2440	53.3	-2.7	2.0
2450	53.4	-2.7	1.9
2460	52.9	-2.8	2.1
2470	52.5	-2.8	2.1
2480	51.9	-2.8	2.1
2490	50.2	-3.0	2.2
2500	49.1	-3.1	2.2
5150	46.8	-3.3	2.3
5200	44.1	-3.6	2.1
5250	43.3	-3.6	2.3
5300	42.8	-3.7	1.9
5350	43.3	-3.6	2.1
5400	46.6	-3.3	2.2
5450	43.4	-3.6	1.8
5500	42.9	-3.7	1.8
5550	41.6	-3.8	1.8
5600	41.9	-3.8	1.9
5650	42.4	-3.7	1.7
5700	42.7	-3.7	1.7
5750	43.7	-3.6	1.9
5800	44.5	-3.5	2.1
5850	47.4	-3.2	2.2

Passive Test For WIFI#2			
Freq (MHz)	Effi (%)	Effi (dB)	Gain (dBi)
2400	44.3	-3.5	1.8
2410	44.8	-3.5	1.9
2420	45.2	-3.4	2.1
2430	46.7	-3.3	2.2
2440	48.4	-3.2	2.2
2450	48.7	-3.1	2.0
2460	49.9	-3.0	2.1
2470	49.3	-3.1	2.1
2480	48.4	-3.2	1.9
2490	47.2	-3.3	2.0
2500	45.9	-3.4	2.2
5150	43.8	-3.6	2.1
5200	42.8	-3.7	1.9
5250	41.6	-3.8	1.8
5300	44.1	-3.6	1.8
5350	45.9	-3.4	1.7
5400	48.1	-3.2	2.1
5450	44.6	-3.5	2.1
5500	43.5	-3.6	2.0
5550	45.2	-3.4	1.9
5600	44.7	-3.5	2.0
5650	47.9	-3.2	1.7
5700	51.8	-2.9	2.1
5750	51.9	-2.8	2.0
5800	53.3	-2.7	1.7
5850	46.4	-3.3	1.7

Active Test For WIFI

Band	Channel	Data Rate	TRP	Data Rate	TIS
WIFI2.4G 802.11b	1	11Mbps	12.1	11Mbps	-81.1
	7		12.5		-81.5
	11		12.3		-80.2
WIFI5.8G 802.11a	149	54Mbps	11.0	54Mbps	-69.9
	157		11.1		-68.7
	165		10.4		-68.5

四：结构图纸

