



REPORT No.: SZ26030132W02

TEST REPORT

APPLICANT : Nubia Technology Co., Ltd.

PRODUCT NAME : REDMAGIC Astra 2 Gaming Tablet

MODEL NAME : NP06J

BRAND NAME : REDMAGIC

STANDARD(S) : MIC Notice No.88 Annex 43

RECEIPT DATE : 2026-03-19

TEST DATE : 2026-03-23 to 2026-05-19

ISSUE DATE : 2026-06-05



Edited by:

Zeng Xiaoying
Zeng Xiaoying (Rapporteur)

Approved by:

Shen Junsheng
Shen Junsheng (Supervisor)

NOTE: This document is issued by Shenzhen Morlab Communications Technology Co., Ltd., the test report shall not be reproduced except in full without prior written permission of the company. The test results apply only to the particular sample(s) tested and to the specific tests carried out which is available on request for validation and information confirmed at our website.

MORLAB

Shenzhen Morlab Communications Technology Co., Ltd.
FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road,
Block67, BaoAn District, ShenZhen, Guangdong Province, P. R. China

Tel: 86-755-36698555
Http://www.morlab.cn

Fax: 86-755-36698525
E-mail: service@morlab.cn





DIRECTORY

1. Summary of Test Results	4
1.1. Testing Applied Methods	4
1.2. Test Equipment List	5
1.3. Measurement Uncertainty	6
1.4. Testing Laboratory	6
2. General Description	7
2.1. Information of Applicant and Manufacturer	7
2.2. Information of EUT	7
2.3. Information of Antenna	8
2.4. Channel List of EUT	8
2.5. Test Configuration of EUT	9
2.6. Test Conditions	10
2.7. Test Setup Layout Diagram	11
3. Description of Test Items	12
3.1. Frequency Error	12
3.2. Dwell Time	13
3.3. Occupied Bandwidth	14
3.4. Unwanted Emission Intensity	15
3.5. Antenna Power Error	16
3.6. Limitation of Collateral Emission of Receiver	17
3.7. E.I.R.P.	18
3.8. Radiation Angle of Antenna	19
3.9. Radio Interference Prevention Capability	20
3.10. Construction Protection Confirmation Method	21
Annex A Test Data and Results	22
Notes	30



REPORT No.: SZ26030132W02

Change History		
Version	Date	Reason for change
1.0	2026-06-05	First edition

1. Summary of Test Results

No.	Description of Test	Test Engineer	Result	Remark
1	Frequency Error	Lin Haoyang	PASS	/
2	Dwell Time	Lin Haoyang	PASS	/
3	Occupied Bandwidth	Lin Haoyang	PASS	/
4	Unwanted Emission Intensity	Lin Haoyang	PASS	/
5	Antenna Power Error	Lin Haoyang	PASS	/
6	Limitation of Collateral Emission of Receiver	Lin Haoyang	PASS	/
7	E.I.R.P.	N/A	N/A _{Note1}	/
8	Radiation Angle of Antenna	N/A	N/A _{Note1}	/
9	Radio Interference Prevention Capability	Lin Haoyang	PASS	/
10	Construction Protection Confirmation	N/A	PASS	/

Note 1: The test item will not be applied to the transmission antenna which has a gain of 2.14dBi or less.

Note 2: Any additions, deviation, or exclusions from the method shall be noted in the "Remark".

1.1. Testing Applied Methods

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- MIC Notice No.88 Annex 43
- Certification of technical standard conformity for specified radio equipment, etc. Article 2 Paragraph 1 of Item 19
- Radio Equipment Regulations Article 49-20



1.2. Test Equipment List

Description	Manufacturer	Model	Serial No.	Cal. Date	Due Date	Cal. Body	Cal. Method
EXA Signal Analyzer	Agilent	N9010A	MY53470836	2025.12.23	2026.12.22	GRG	c
DC Power Supply	IVYTECH	IV3610	1709D361010	2025.09.03	2026.09.02	CCIC	c
Power Sensor	Agilent	U2021XA	MY54180008	2025.09.03	2026.09.02	CCIC	c
Radio Communication Tester	R&S	CMW500	108950	2025.12.23	2026.12.22	GRG	c

Note 1: The equipment were calibrated by CCIC (Shenzhen) Metrology&Testing Service Co.,Ltd, and GRG METROLOGY & TEST GROUP Co.,LTD.

Note 2: Calibration Method:

- Calibration conducted by the National Institute of Information and Communications Technology (NICT) (hereinafter referred to as "NICT") or a designated calibration agency under Article 102-18 paragraph (1);
- Correction conducted pursuant to the provisions of Article 135 or Article 144 of the Measurement Law (Law No. 51 of 1992);
- Calibration conducted in foreign countries, which shall be equivalent to the calibration conducted by the NICT or a designated calibration agency under Article 102-18 paragraph (1);
- Calibration conducted by using measuring instruments and other equipment listed in the right column of Table No. 3 attached hereto, which shall have been given any of calibration, etc. listed above from a) to c).



REPORT No.: SZ26030132W02

1.3. Measurement Uncertainty

No.	Test Items	Uncertainty	Remark
1	Frequency Error / 99% Bandwidth	$\pm 1.75 \times 10^{-6}$	Confidence levels of 95%
2	Antenna Power	$\pm 1.14\text{dB}$	Confidence levels of 95%
3	Spurious Emissions(<1GHz)	$\pm 2.23\text{dB}$	Confidence levels of 95%
4	Spurious Emissions(>1GHz)	$\pm 1.72\text{dB}$	Confidence levels of 95%
5	Transmission Antenna Gain	$\pm 2.49\text{dB}$	Confidence levels of 95%

1.4. Testing Laboratory

Laboratory Name	Shenzhen Morlab Communications Technology Co., Ltd.
Laboratory Address	FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block 67, BaoAn District, ShenZhen, GuangDong Province, P. R. China
Telephone	+86 755 36698555
Facsimile	+86 755 36698525

2. General Description

2.1. Information of Applicant and Manufacturer

Applicant	Nubia Technology Co., Ltd.
Applicant Address	Room 1801, Building 2, Chongwen Park, Nanshan Zhiyuan, No.3370, Liuxian Rd, Nanshan District, Shenzhen City, Guangdong Province, P. R. China
Manufacturer	Nubia Technology Co., Ltd.
Manufacturer Address	Room 1801, Building 2, Chongwen Park, Nanshan Zhiyuan, No.3370, Liuxian Rd, Nanshan District, Shenzhen City, Guangdong Province, P. R. China

2.2. Information of EUT

Product Name	REDMAGIC Astra 2 Gaming Tablet		
Sample No.	1#		
Hardware Version	NP06JHW1.0		
Software Version	RedMagicOS11.5.x_NP06J_GB		
Equipment Type	Bluetooth classic		
Bluetooth Version	6.0		
Modulation Technology	FHSS		
Modulation Type	GFSK(BR 1Mbps), $\pi/4$ -DQPSK(EDR 2Mbps), 8-DPSK(EDR 3Mbps)		
Operating Frequency Range	2402MHz – 2480MHz (at interval of 1MHz)		
Channel List	Please refer as chapter 2.4 in this report.		
Power Supply	Type	Battery	
	Voltage (V)	Low	3.6
		Rated	3.92
		High	4.5

Note 1: The EUT has two antennas that cannot transmit simultaneously. Both of the two antennas were evaluated separately, only the worst test result (ANT 3) were recorded in the test report.

Note 2: The black bold voltage values were selected for test, about the voltage fluctuation evaluation, please refer as chapter 2.6.2 in this report.

Note 3: The EUT description presented in the report are provided by applicant and/or manufacturer, and the test laboratory is not responsible for the accuracy of the information. For a more detailed description, please refer to Specification or User's Manual supplied by the



applicant and/or manufacturer.

2.3. Information of Antenna

Antenna Manufacturer	N/A
Brand Name	N/A
Model Name	N/A
Antenna Type	Cavity Antenna
Antenna Gain	ANT 2: -0.42dBi; ANT 3: -1.76dBi

2.4. Channel List of EUT

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2402	20	2422	40	2442	60	2462
1	2403	21	2423	41	2443	61	2463
2	2404	22	2424	42	2444	62	2464
3	2405	23	2425	43	2445	63	2465
4	2406	24	2426	44	2446	64	2466
5	2407	25	2427	45	2447	65	2467
6	2408	26	2428	46	2448	66	2468
7	2409	27	2429	47	2449	67	2469
8	2410	28	2430	48	2450	68	2470
9	2411	29	2431	49	2451	69	2471
10	2412	30	2432	50	2452	70	2472
11	2413	31	2433	51	2453	71	2473
12	2414	32	2434	52	2454	72	2474
13	2415	33	2435	53	2455	73	2475
14	2416	34	2436	54	2456	74	2476
15	2417	35	2437	55	2457	75	2477
16	2418	36	2438	56	2458	76	2478
17	2419	37	2439	57	2459	77	2479
18	2420	38	2440	58	2460	78	2480
19	2421	39	2441	59	2461		

Note 1: The black bold channels were selected for test.



2.5. Test Configuration of EUT

2.5.1. Evaluation of The Worst Case

Investigation has been done on all the possible configurations for searching the worst cases. The following table is a list of the test modes shown in this test report.

Test Items	Mode	Channel
Frequency Error	Unmodulated Single Carrier	0/39/78
Occupied Bandwidth	GFSK, $\pi/4$ -DQPSK, 8-DPSK	Hopping
Dwell Time		Hopping
Unwanted Emission Intensity		0/39/78
Antenna Power and Antenna Power Error		0/39/78
Limitation of Collateral Emission of Receiver		0/39/78
Transmission Radiation Angle Width		0/39/78
Radio Interference Prevention Capability		Normal Use

2.5.2. Operation and Transmitter Power Setting

The EUT was tested while in a continues transmitter/receiver mode under the control of tool which is provided by manufacturer, all the items of transmitter were tested under the power setting as below:

Mode	Data Rate	Channel	Power Setting
Unmodulated Single Carrier	-	0/39/78	Default
GFSK	1Mbps	0/39/78	11
$\pi/4$ -DQPSK	2Mbps	0/39/78	11
8-DPSK	3Mbps	0/39/78	11
GFSK-AFH	1Mbps	0/39/78	11
$\pi/4$ -DQPSK-AFH	2Mbps	0/39/78	11
8-DPSK-AFH	3Mbps	0/39/78	11



2.6. Test Conditions

2.6.1. Environment Condition

Temperature (°C)	21.3
Relative Humidity (%)	68

2.6.2. Power Supply Voltage Fluctuation

During the input supply voltage to the EUT from the external power source is varied by +/- 10%, the output voltage had been confirmed that the fluctuation of power supply to the RF unit of EUT is equal to or less +/- 1%.

Power Supply		External Voltage $V_E(V)$			Internal Voltage V_I		
		V_{EN}	V_{EL}/V_{EH}		$V_{IN}(V)$	$V_{IE}(V)$	Variation of V_I
Type1	Battery	3.92	V_{EL}	3.600	1.8	1.792	0.44%
			V_{EH}	4.312		1.809	0.50%

V_{EN} : Normal Voltage


V_{EL} : V_{EL} is the declared low voltage provided that $V_{EN} \times 90\%$ is less than the declared low voltage, otherwise it is $V_{EN} \times 90\%$

V_{EH} : V_{EH} is the declared high voltage provided that $V_{EN} \times 110\%$ is larger than the declared high voltage, otherwise it is $V_{EN} \times 110\%$


V_{IN} : The voltage supply to the radio unit.

2.7. Test Setup Layout Diagram


2.7.1. General Measurement




2.7.2. Antenna Power Measurement

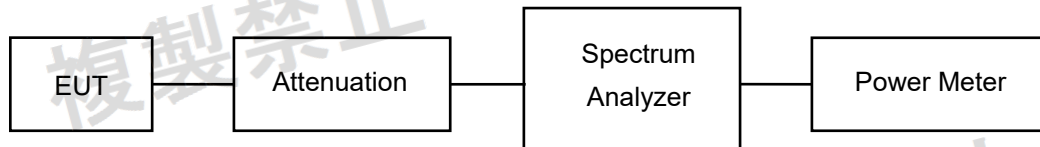

2.7.3. Radiation Angle of Antenna

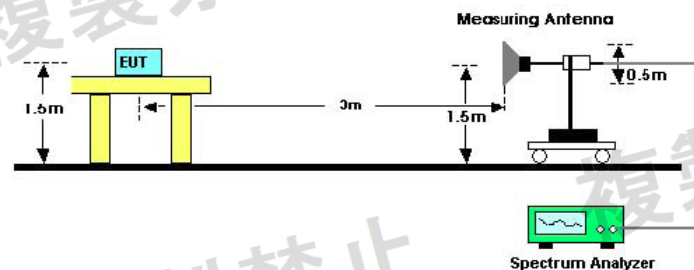

2.7.4. Radio Interference Prevention Capability Measurement

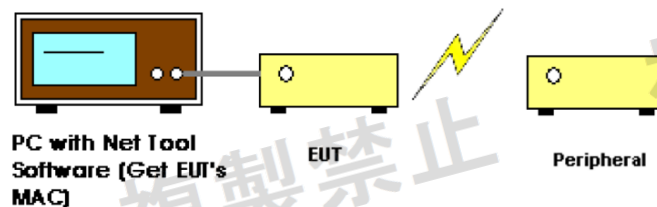



3. Description of Test Items

3.1. Frequency Error

3.1.1. Limits

Within ± 50 ppm.

3.1.2. Test Procedures

According to MIC Notice No.88 Annex 43.

3.1.3. Test Setup Layout

Refer to chapter 2.7.1 in this report.

3.1.4. Test Deviation

There is no deviation with the original standard.

3.1.5. Test Results

Refer to Annex A.1 in this report.



3.2. Dwell Time

3.2.1. Limits

The dwell time is the time spent at a particular frequency during any single hop.
The maximum dwell time shall be 0.4 s.

3.2.2. Test Procedures

According to MIC Notice No.88 Annex 43.

Hopping Mode	Hopping Period	Calculation Formula of Dwell Time
Normal	31.6 s	$0.4 \times \text{Spread Factor} / \text{Hopping Period} \times \text{Single Pulse Time} \times \text{Number of times occupied in 31.6 s}$
	Can not be determined	$\text{Spread Factor} \times \text{Single Pulse Time} \times \text{Number of times occupied in 0.4 s}$
AFH	-	$\text{Single Pulse Time} \times \text{Hopping Rate}(1600) / 2 / 6 / \text{Hopping Channel Number}(20) \times 0.4 \times \text{Hopping Channel Number}(20)$

The value of spread factor is obtained by dividing the spreading bandwidth by the frequency equal to the transmission speed of the modulated signal.

3.2.3. Test Setup Layout

Refer to chapter 2.7.1 in this report.

3.2.4. Test Deviation

There is no deviation with the original standard.

3.2.5. Test Results

Refer to Annex A.2 in this report.



3.3.Occupied Bandwidth

3.3.1.Limits

Item	Type	Limits
Occupied Bandwidth	FHSS	≤83.5MHz
	DSSS	≤26MHz
	OFDM	
	Other	

3.3.2.Test Procedures

According to MIC Notice No.88 Annex 43.

3.3.3.Test Setup Layout

Refer to chapter 2.7.1 in this report.

3.3.4.Test Deviation

There is no deviation with the original standard.

3.3.5.Test Results

Refer to Annex A.3 in this report.



3.4. Unwanted Emission Intensity

3.4.1. Limits

Frequency Range	Limits
30MHz-1000MHz	$\leq 0.25 \mu\text{W}/100\text{kHz}$
1000MHz-2387MHz	$\leq 2.5 \mu\text{W}/\text{MHz}$
2387MHz-2400MHz	$\leq 25 \mu\text{W}/\text{MHz}$
2483.5MHz-2496.5MHz	$\leq 25 \mu\text{W}/\text{MHz}$
2496.5MHz-12500MHz	$\leq 2.5 \mu\text{W}/\text{MHz}$

3.4.2. Test Procedures

According to MIC Notice No.88 Annex 43.

3.4.3. Test Setup Layout

Refer to chapter 2.7.1 in this report.

3.4.4. Test Deviation

There is no deviation with the original standard.

3.4.5. Test Results

Refer to Annex A.4 in this report.

Note1: The spurious emissions mask that displayed on the plots is composed of several frequency ranges below:

Range	Start Freq. (MHz)	Stop Freq. (MHz)	RBW	VBW	Detector Type	Trace Mode	Limit (μW)
1	30	1000	100kHz	100kHz	Peak	Max Hold	0.25
2	1000	2387	1MHz	1MHz	Peak	Max Hold	2.5
3	2387	2400	1MHz	1MHz	Peak	Max Hold	25
4	2400	2483.5	1MHz	1MHz	Peak	Max Hold	20000
5	2483.5	2496.5	1MHz	1MHz	Peak	Max Hold	25
6	2496.5	12500	1MHz	1MHz	Peak	Max Hold	2.5

Note 2: Only the spurious with the minimum margin from the limit line will be displayed in the mark table (The lower window on the test plots).



3.5. Antenna Power Error

3.5.1. Limits

Type	Frequency Range	Limits	
		Antenna Power Density	Antenna Power Error
FHSS	2427-2470.75 MHz	≤ 3 mW/MHz	$\leq +20\%$
	2400-2483.5 MHz (except 2427-2470.75 MHz)	≤ 10 mW/MHz	
DSSS	2400-2483.5 MHz	≤ 10 mW/MHz	
OFDM	2400-2483.5 MHz	≤ 10 mW/MHz (20MHz System) ≤ 5 mW/MHz (40MHz System)	
Other	2400-2483.5 MHz	≤ 10 mW	

3.5.1. Test Procedures

According to MIC Notice No.88 Annex 43.

3.5.2. Test Setup Layout

Refer to chapter 2.7.2 in this report.

3.5.3. Test Deviation

There is no deviation with the original standard.

3.5.4. Test Results

Refer to Annex A.5 in this report.



3.6. Limitation of Collateral Emission of Receiver

3.6.1. Limits

Frequency Range	Limits
30MHz-1000MHz	$\leq 4\text{nW}/100\text{kHz}$
1000MHz-12500MHz	$\leq 20\text{nW}/\text{MHz}$

3.6.2. Test Procedures

According to MIC Notice No.88 Annex 43.

3.6.3. Test Setup Layout

Refer to chapter 2.7.1 in this report.

3.6.4. Test Deviation

There is no deviation with the original standard.

3.6.5. Test Results

Refer to Annex A.6 in this report.

Note 1: The spurious emissions mask that displayed on the plots is composed of several frequency ranges below:

Range	Start Freq. (MHz)	Stop Freq. (MHz)	RBW	VBW	Detector Type	Trace Mode	Limit (nW)
1	30	1000	100kHz	100kHz	Peak	Max Hold	4
2	1000	12500	1MHz	1MHz	Peak	Max Hold	20

Note 2: Only the spurious with the minimum margin from the limit line will be displayed in the mark table (The lower window on the test plots).



3.7.E.I.R.P.

3.7.1.Limits

Type	Frequency Range	Limits
FHSS	2427-2470.75 MHz	6.91-16.91dBm/MHz
	2400-2483.5 MHz (except 2427-2470.75 MHz)	12.14-22.14dBm/MHz
DSSS	2400-2483.5 MHz	12.14-22.14dBm/MHz
OFDM	2400-2483.5 MHz	12.14-22.14dBm/MHz (20MHz System) 9.13-19.13dBm/MHz (40MHz System)
Other	2400-2483.5 MHz	12.14-22.14dBm (GFSK) 10dBm (except GFSK)

Note: This item not be applied to the transmission antenna which has a gain of 2.14dBi or less

3.7.2.Test Procedures

According to MIC Notice No.88 Annex 43.

3.7.3.Test Setup Layout

Refer to chapter 2.7.2 in this report.

3.7.4.Test Deviation

There is no deviation with the original standard.

3.7.5.Test Results

Refer to Annex A.7 in this report.



3.8. Radiation Angle of Antenna

3.8.1. Limits

Type	Limits
FHSS	360° /A; (A= E.I.R.P./ 6.91, if A<1; then A=1)
DSSS	360° /A; (A= E.I.R.P./ 12.14, if A<1; then A=1)
OFDM	
Other	

Note: This item not be applied to the transmission antenna which has a gain of 2.14dBi or less

3.8.2. Test Procedures

According to MIC Notice No.88 Annex 43.

3.8.3. Test Setup Layout

Refer to chapter 2.7.3 in this report.

3.8.4. Test Deviation

There is no deviation with the original standard.

3.8.5. Test Results

Refer to Annex A.8 in this report.



3.9. Radio Interference Prevention Capability

3.9.1. Limits

The one automatically to transmit and to receive identification code with the wireless equipment of the wireless station used in the same premises.

3.9.2. Test Procedures

According to MIC Notice No.88 Annex 43.

3.9.3. Test Setup Layout

Refer to chapter 2.7.4 in this report.

3.9.4. Test Deviation

There is no deviation with the original standard.

3.9.5. Test Results

Refer to Annex A.9 in this report.

3.10. Construction Protection Confirmation Method

3.10.1.Limits


The high-frequency section and modulation section of the radio equipment except for the antenna system shall not be capable of being opened easily.

3.10.2.Confirmation Method

The RF and modulation portions are protected against illegal modification as following method:

Protected Method	Description
Shield	The RF module use a shield to protect the RF and modulation portions, if the shield is removed, the module will be damaged to the point that it will not work properly.

3.10.3.Reference Documents

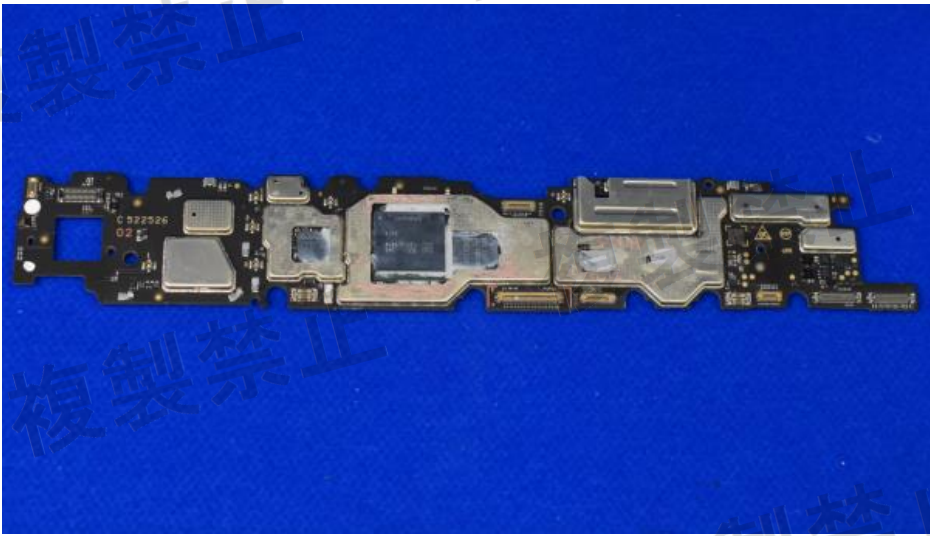
Reference Documents	Item
Photo	



Annex A Test Data and Results

A.1. Frequency Error

Channel	Frequency f_c (MHz)	Test Frequency f (MHz)	Frequency Error (ppm)	Verdict
0	2402	2402.0044	1.83	PASS
39	2441	2441.0051	2.09	PASS
78	2480	2480.0052	2.10	PASS

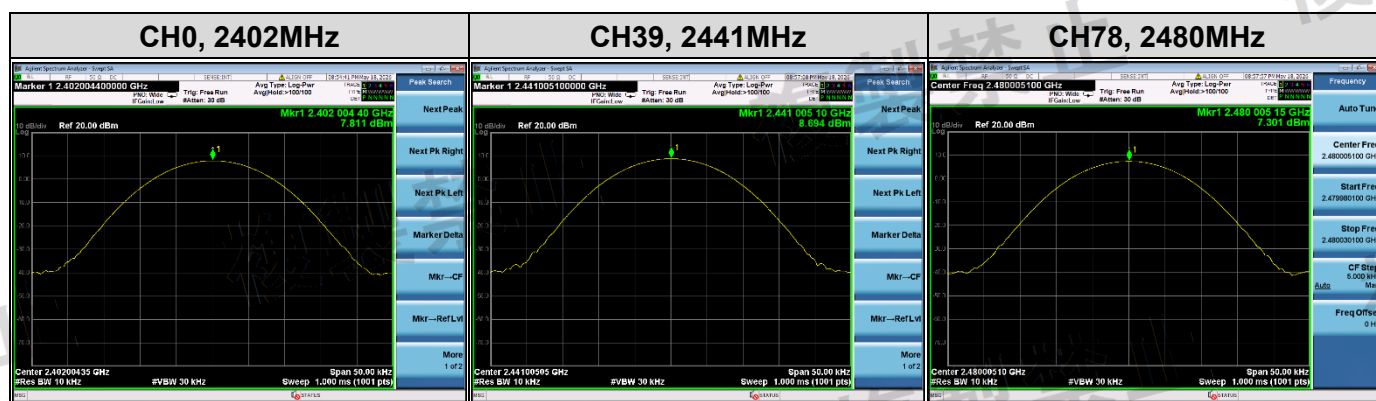




A.2. Dwell Time

Test Mode	Freq. (MHz)	Single Pulse Time (ms)	Dwell Time (s)	Limit (s)	Verdict
GFSK	2441	2.880	0.385	0.4	PASS
$\pi/4$ -DQPSK	2441	2.880	0.090		PASS
8-DPSK	2441	2.880	0.112		PASS
GFSK-AFH	2441	2.880	0.154		PASS
$\pi/4$ -DQPSK-AFH	2441	2.880	0.154		PASS
8-DPSK-AFH	2441	2.880	0.154		PASS

A.3. Occupied Bandwidth


Test Mode	99% Occupied Bandwidth (MHz)	Verdict
GFSK	78.495	PASS
$\pi/4$ -DQPSK	78.691	PASS
8-DPSK	78.459	PASS

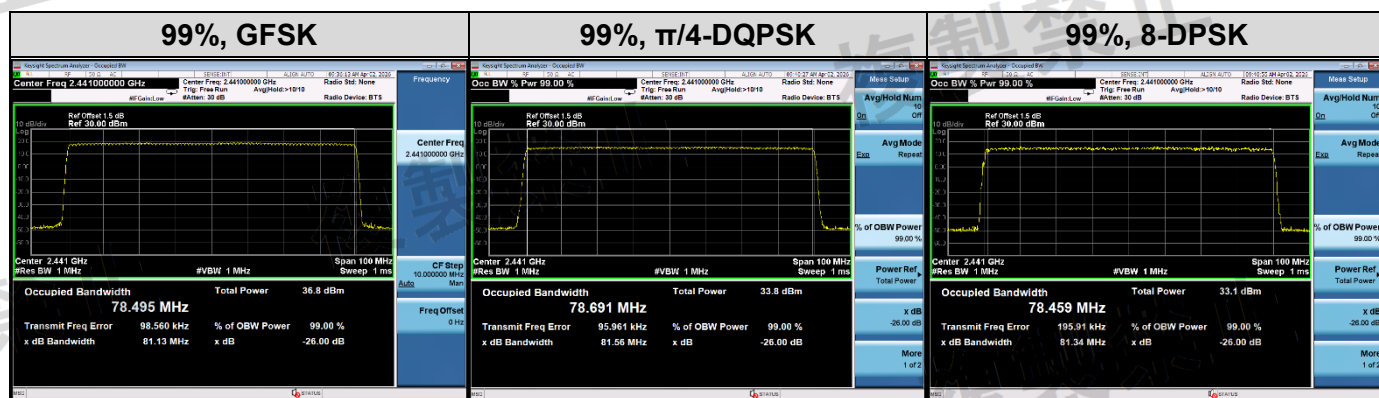



A.4. Unwanted Emission Intensity

Mode	Frequency Range (MHz)	Test Result Value	Limit	Verdict
GFSK, $\pi/4$ -DQPSK, 8-DPSK	30~1000	Refer to below plot	0.25 μ W/100kHz	PASS
	1000~2387		2.5 μ W/MHz	PASS
	2387~2400		25 μ W/MHz	PASS
	2483.5~2496.5		25 μ W/MHz	PASS
	2496.5~12500		2.5 μ W/MHz	PASS

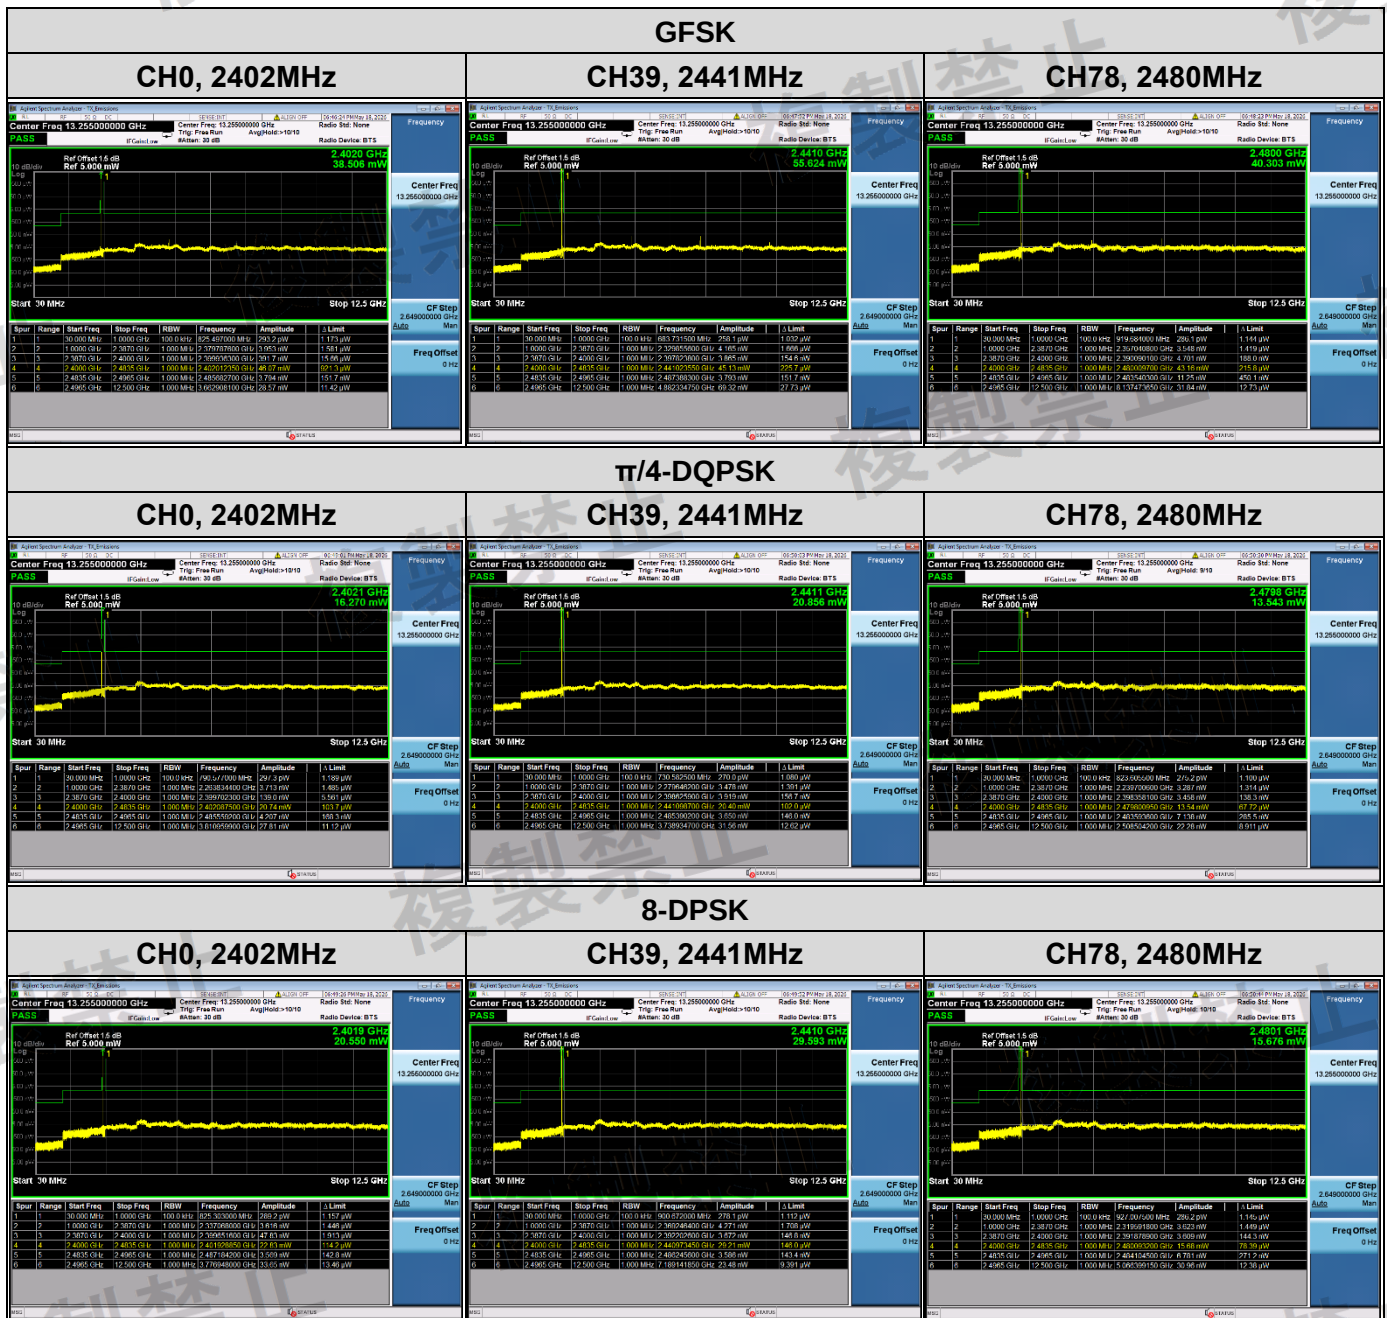



A.5. Antenna Power Error

ANT2


Mode	Power Test Value (dBm)	Spread spectrum BW (MHz)	Duty Factor	Antenna Power Density PD		Declare Power (mW/MHz)	Antenna Power Error	Verdict
				(dBm/M Hz)	(mW/M Hz)			
GFSK	17.55	70.36	1.15	0.23	1.054	1.00	5.40%	PASS
$\pi/4$ -DQPSK	13.20	70.77	1.13	-4.17	0.383	1.00	-61.70%	PASS
8-DPSK	13.48	70.71	1.13	-3.88	0.409	1.00	-59.10%	PASS
GFSK-AFH	15.58	55.79	1.15	-0.74	0.843	1.00	-15.70%	PASS
$\pi/4$ -DQPSK-AFH	11.96	56.34	1.13	-4.42	0.361	1.00	-63.90%	PASS
8-DPSK-AFH	12.15	56.21	1.13	-4.22	0.378	1.00	-62.20%	PASS

ANT3

Mode	Power Test Value (dBm)	Spread spectrum BW (MHz)	Duty Factor	Antenna Power Density PD		Declare Power (mW/MHz)	Antenna Power Error	Verdict
				(dBm/M Hz)	(mW/M Hz)			
GFSK	17.71	70.36	1.15	0.39	1.094	1.00	9.40%	PASS
$\pi/4$ -DQPSK	13.50	70.77	1.13	-3.87	0.410	1.00	-59.00%	PASS
8-DPSK	13.77	70.71	1.13	-3.59	0.438	1.00	-56.20%	PASS
GFSK-AFH	15.43	55.79	1.15	-0.89	0.815	1.00	-18.50%	PASS
$\pi/4$ -DQPSK-AFH	13.85	56.34	1.13	-2.53	0.558	1.00	-44.20%	PASS
8-DPSK-AFH	13.79	56.21	1.13	-2.58	0.552	1.00	-44.80%	PASS



REPORT No.: SZ26030132W02

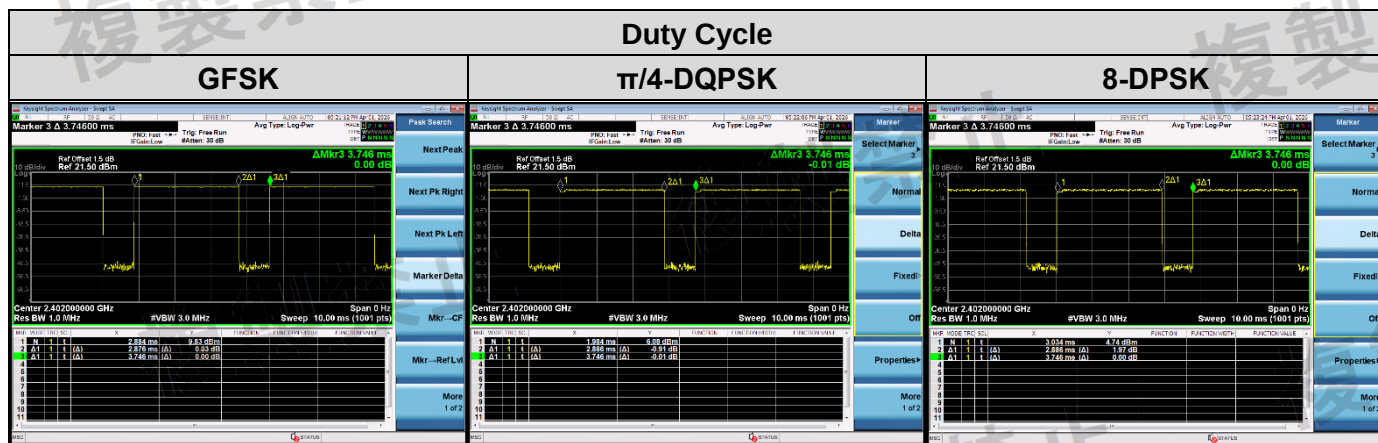

MORLAB

Shenzhen Morlab Communications Technology Co., Ltd.
FL 1-3, Building A, FeiYang Science Park, No.8 LongChang Road,
Block67, BaoAn District, ShenZhen, Guangdong Province, P. R. China

Tel: 86-755-36698555

Http://www.morlab.cn


Fax: 86-755-36698525

E-mail: service@morlab.cn



A.6. Limitation of Collateral Emission of Receiver

Mode	Frequency Range (MHz)	Test Result Value	Limit	Verdict
Receive	30~1000	Refer to below plot	4nW/100kHz	PASS
	1000~12500		20nW/MHz	PASS

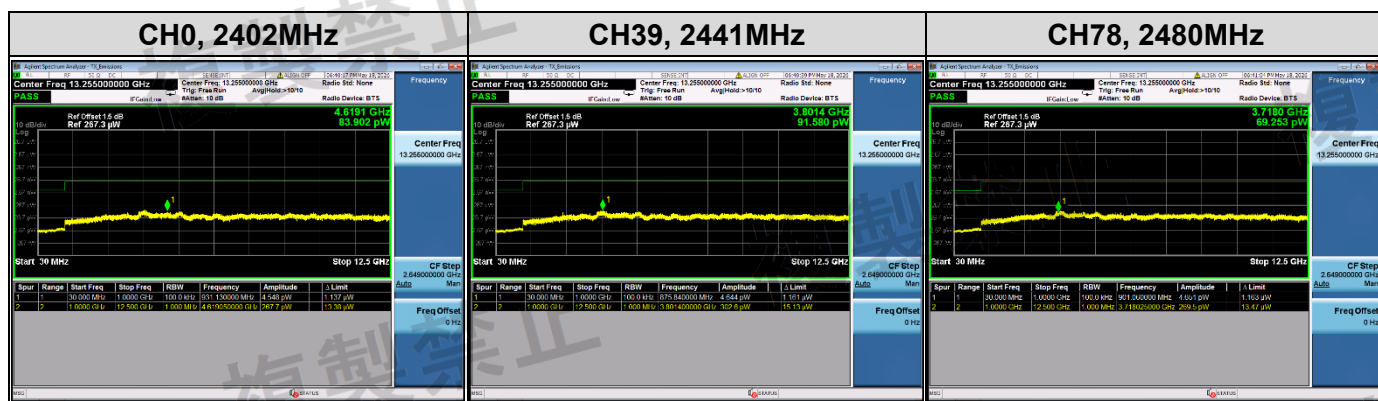



REPORT No.: SZ26030132W02

A.7. E.I.R.P.

Note: This test item will not be applied to the transmission antenna which has a gain of 2.14dBi or less.

A.8. Radiation Angle of Antenna

Note: This test item will not be applied to the transmission antenna which has a gain of 2.14dBi or less.



REPORT No.: SZ26030132W02

A.9. Radio Interference Prevention Capability

The identification code of the EUT is: DC:68:80:30:C6:CD

Phone's Bluetooth address: DC:68:80:30:C6:CD



REPORT No.: SZ26030132W02

Notes

1. The report shall have report stamp or our company stamp.
2. The report shall be invalid without all the signatures of the editor and approver.
3. The report shall not be changed.
4. Any objections must be raised to Morlab within 15 days since the date when the report is received. It will not be taken into consideration beyond this limit.
5. Conformity declaration:
 - ☒ Morlab issues a statement of conformity based on the corresponding standards (default)
 - ☐ Morlab issues a statement of conformity based on the applicant requirement
6. Use of uncertainty of measurement for decisions on conformity (decision rule):

No decision rule is specified by the testing standard, when comparing the measurement result with the applicable limit according to the specification in that standard. The decisions on conformity are made without applying the measurement uncertainty ("simple acceptance" decision rule).

_____ END OF REPORT _____