


Site: AC1	Time: 2020/03/16 - 14:16
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT20 at Channel 5180MHz with OAW-AP1361 (CDD Mode)	

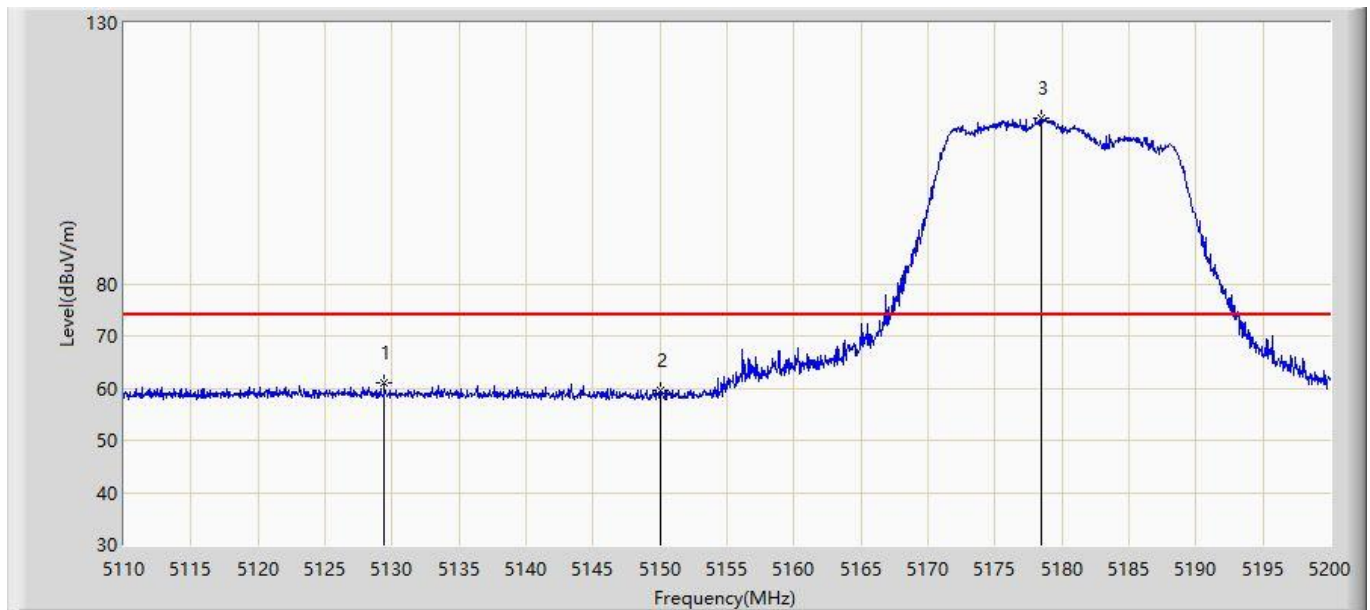

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5129.395	61.063	57.430	-12.937	74.000	3.632	PK
2			5150.000	59.446	55.800	-14.554	74.000	3.646	PK
3		*	5178.490	111.688	108.024	N/A	N/A	3.664	PK

Test Mode: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/03/16 - 14:18
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT20 at Channel 5180MHz with OAW-AP1361 (CDD Mode)	




No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	46.417	42.771	-7.583	54.000	3.646	AV
2		*	5178.940	101.367	97.703	N/A	N/A	3.664	AV

Test Mode: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/03/16 - 14:21
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT20 at Channel 5320MHz with OAW-AP1361 (CDD Mode)	

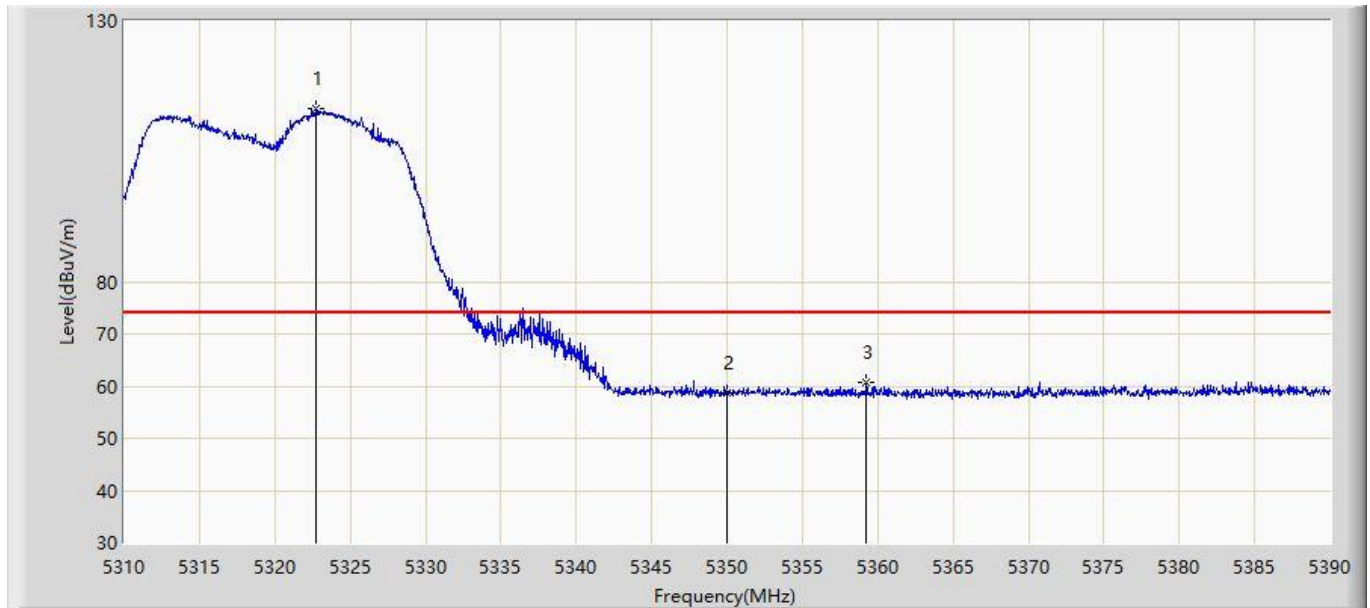


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5322.760	113.157	109.400	N/A	N/A	3.757	PK
2			5350.000	58.786	55.012	-15.214	74.000	3.774	PK
3			5359.240	60.721	56.941	-13.279	74.000	3.779	PK

Test Mode: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/03/16 - 14:22
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT20 at Channel 5320MHz with OAW-AP1361 (CDD Mode)	

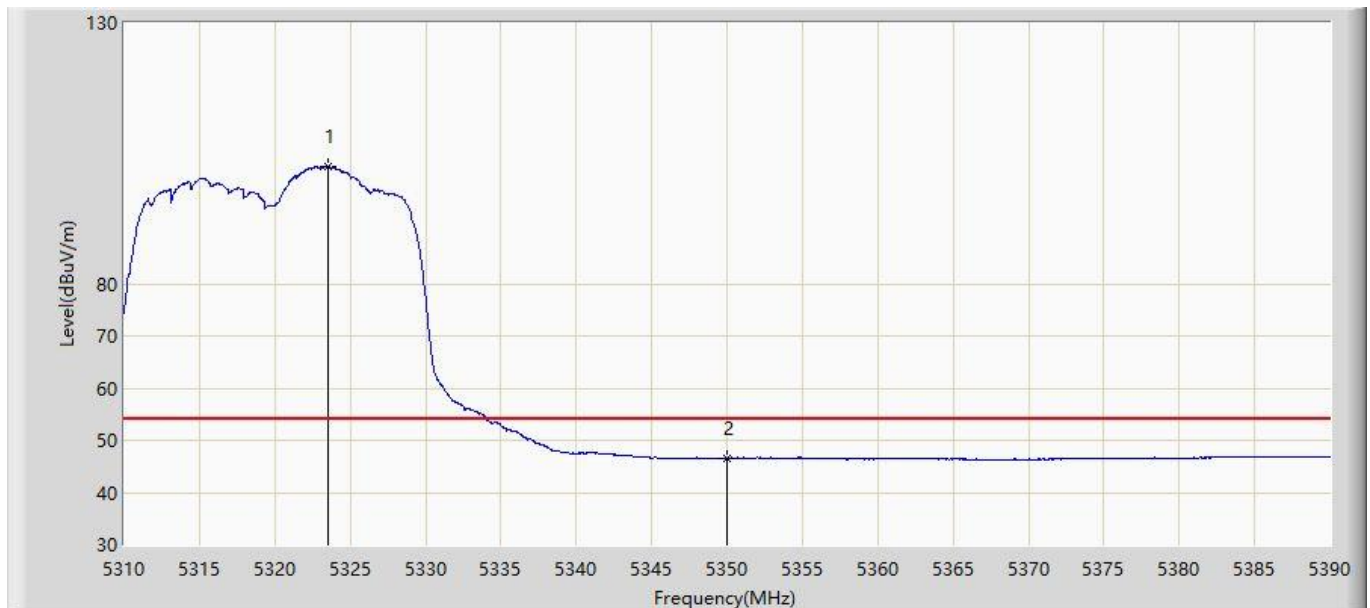


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5323.520	102.544	98.786	N/A	N/A	3.757	AV
2			5350.000	46.560	42.786	-7.440	54.000	3.774	AV

Test Mode: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/03/16 - 14:23
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT20 at Channel 5320MHz with OAW-AP1361 (CDD Mode)	

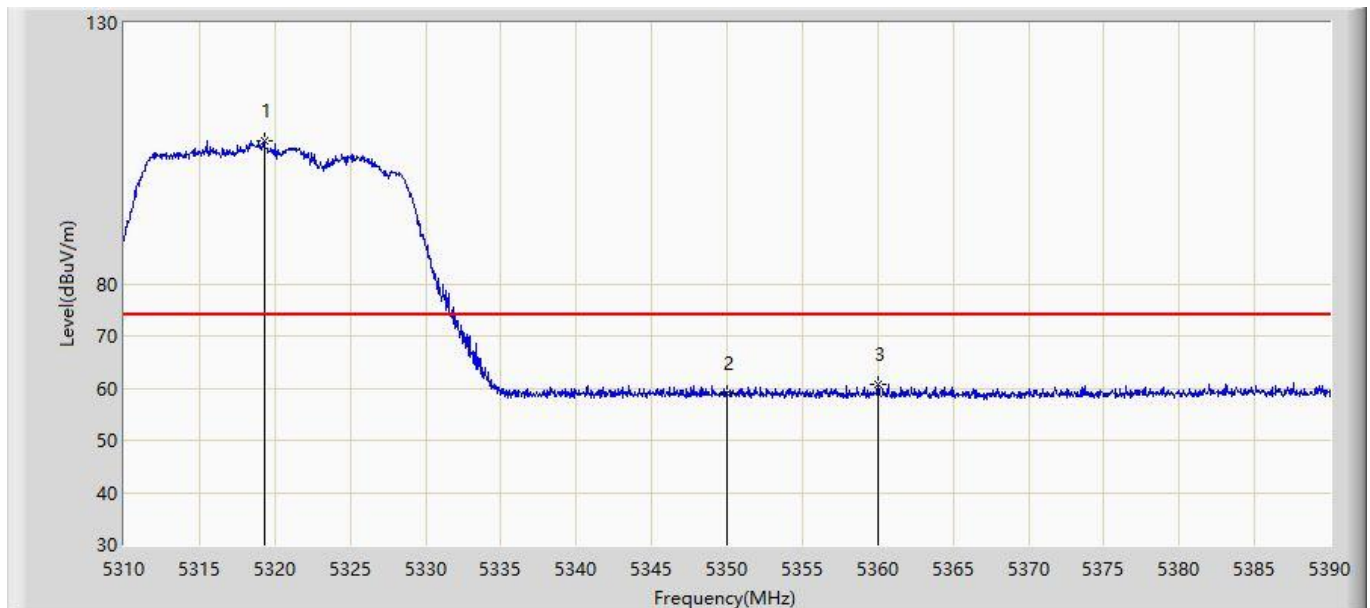


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5319.280	107.392	103.637	N/A	N/A	3.755	PK
2			5350.000	58.935	55.161	-15.065	74.000	3.774	PK
3			5360.000	60.855	57.075	-13.145	74.000	3.781	PK

Test Mode: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/03/16 - 14:24
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT20 at Channel 5320MHz with OAW-AP1361 (CDD Mode)	

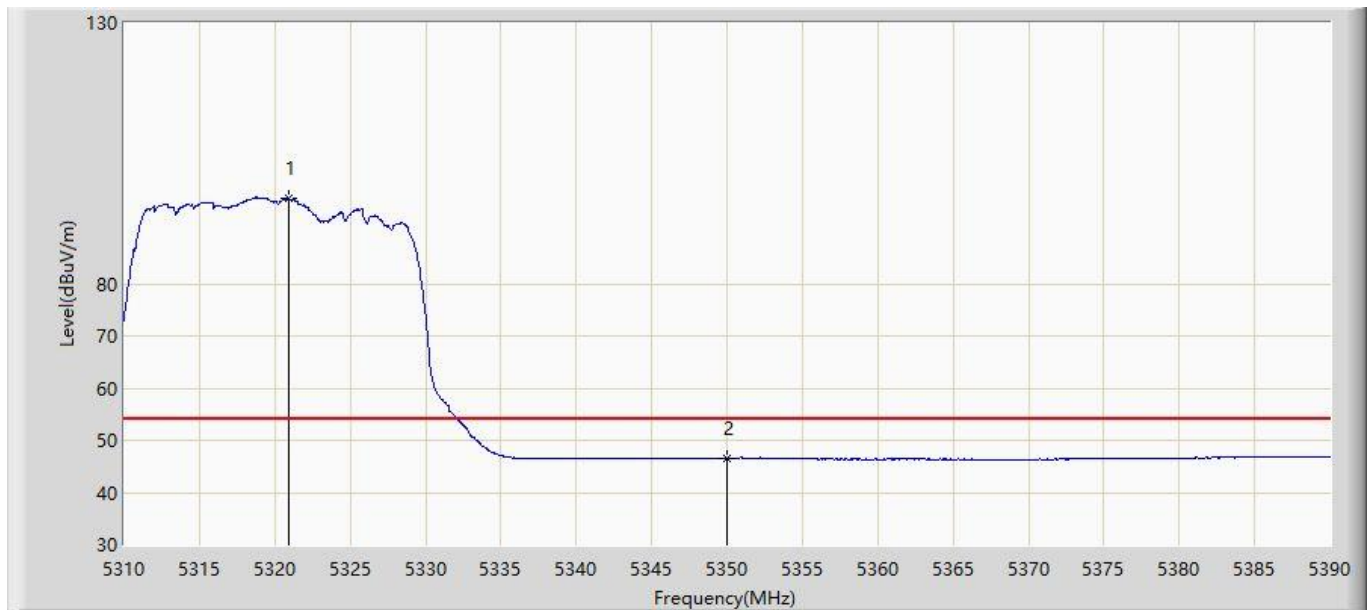


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5320.920	96.433	92.677	N/A	N/A	3.757	AV
2			5350.000	46.540	42.766	-7.460	54.000	3.774	AV

Test Mode: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/03/16 - 14:25
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT20 at Channel 5500MHz with OAW-AP1361 (CDD Mode)	

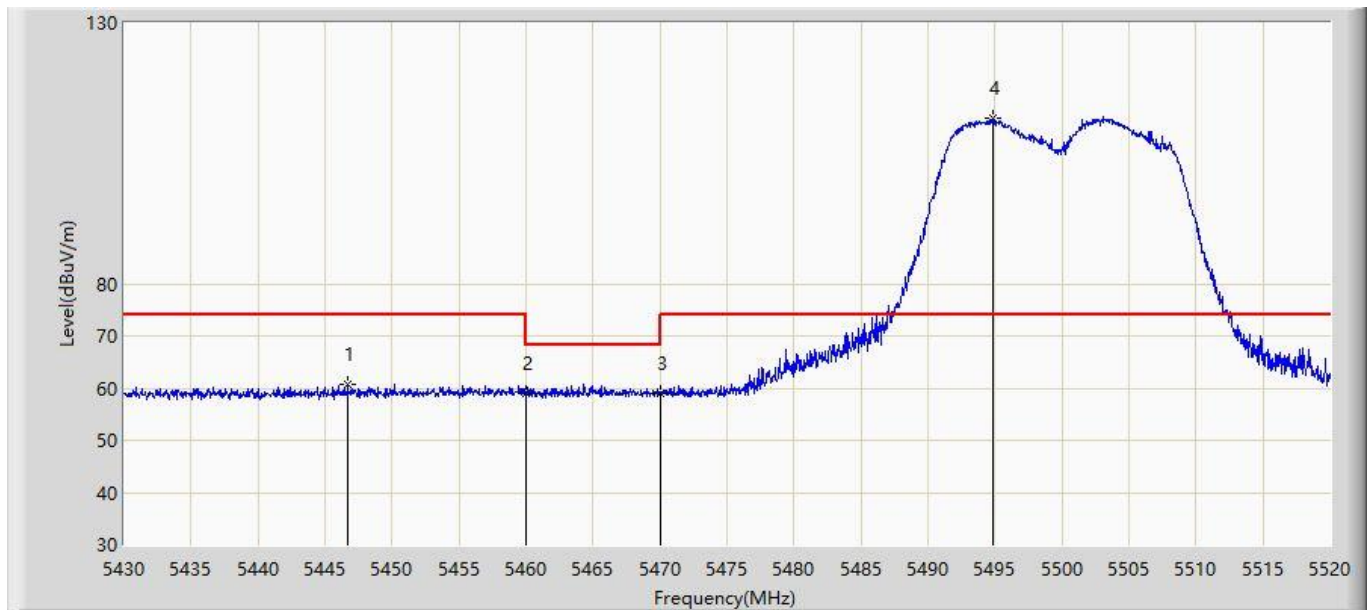


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5446.695	60.609	56.774	-13.391	74.000	3.836	PK
2			5460.000	58.998	55.154	-15.002	74.000	3.844	PK
3			5470.000	59.130	55.279	-9.070	68.200	3.850	PK
4		*	5494.845	111.830	107.956	N/A	N/A	3.874	PK

Test Mode: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/03/16 - 14:27
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT20 at Channel 5500MHz with OAW-AP1361 (CDD Mode)	

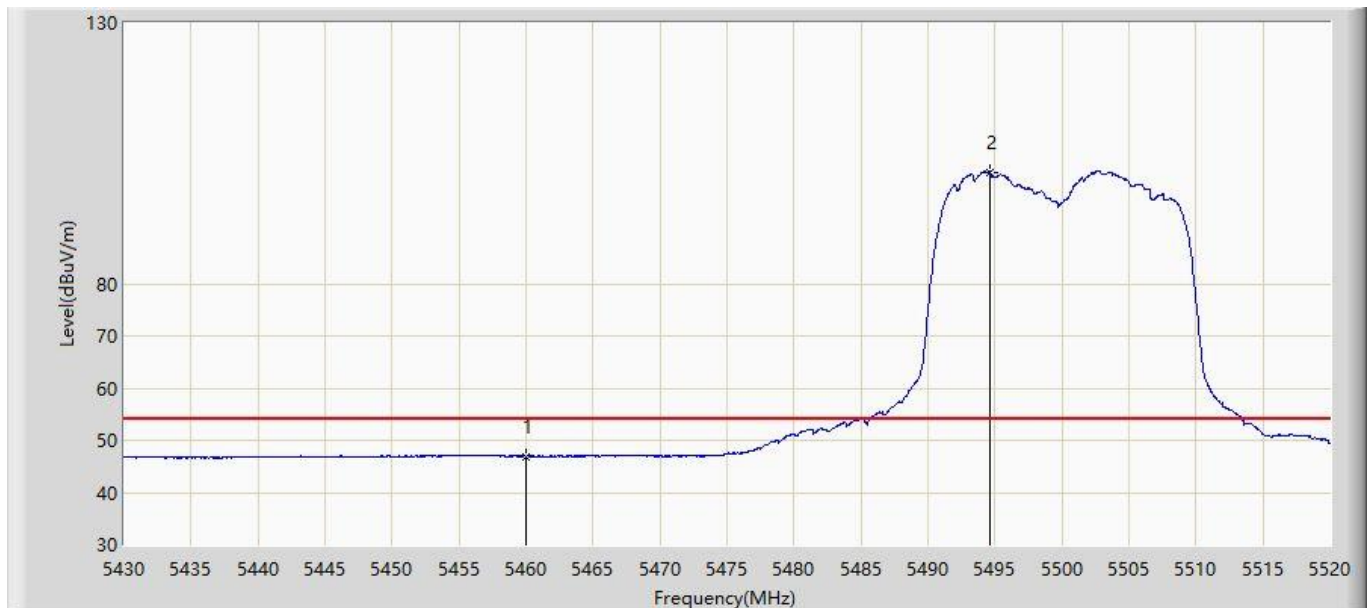


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	46.936	43.092	-7.064	54.000	3.844	AV
2		*	5494.620	101.409	97.535	N/A	N/A	3.874	AV

Test Mode: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/03/16 - 14:28
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT20 at Channel 5500MHz with OAW-AP1361 (CDD Mode)	

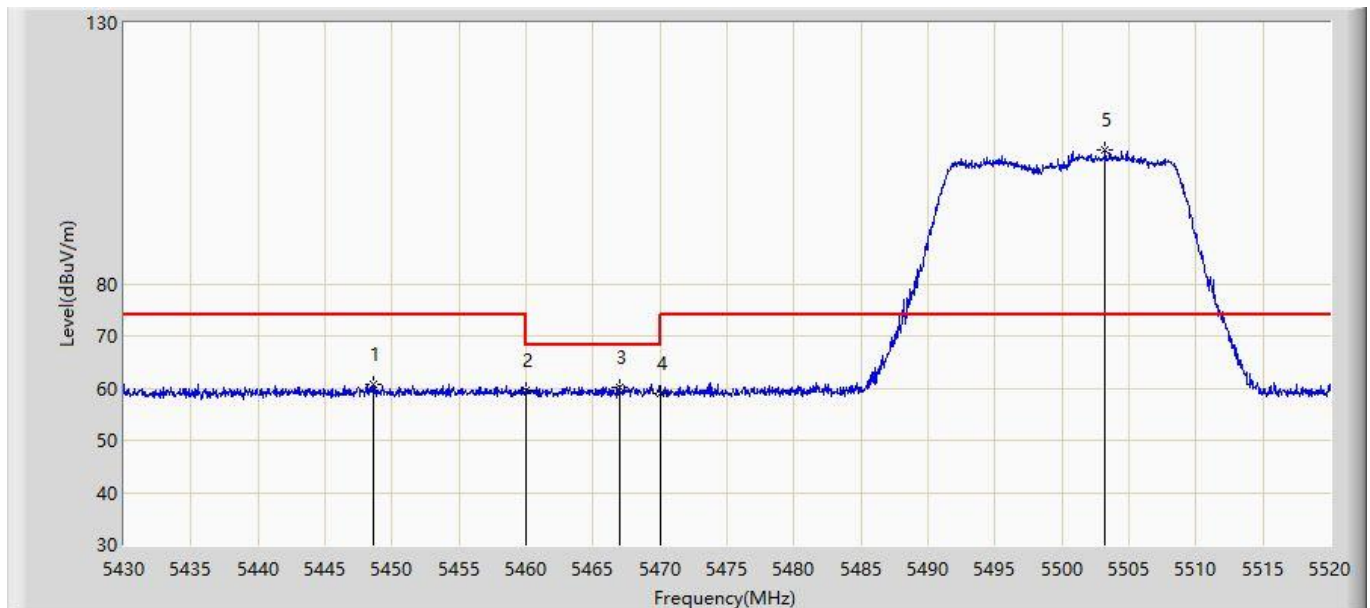


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5448.585	60.685	56.849	-13.315	74.000	3.836	PK
2			5460.000	59.449	55.605	-14.551	74.000	3.844	PK
3			5466.945	60.289	56.441	-7.911	68.200	3.848	PK
4			5470.000	59.098	55.247	-9.102	68.200	3.850	PK
5		*	5503.215	105.670	101.783	N/A	N/A	3.887	PK

Test Mode: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/03/16 - 14:29
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT20 at Channel 5500MHz with OAW-AP1361 (CDD Mode)	

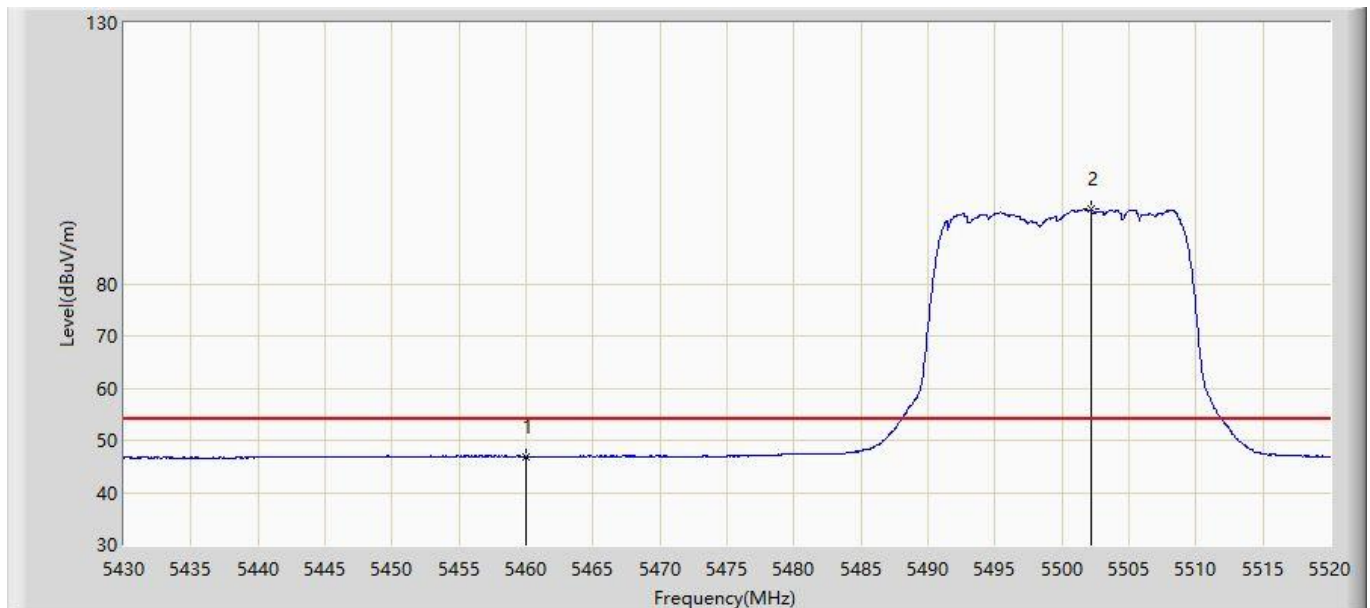


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	46.905	43.061	-7.095	54.000	3.844	AV
2		*	5502.180	94.244	90.359	N/A	N/A	3.885	AV

Test Mode: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/03/16 - 14:31
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT20 at Channel 5700MHz with OAW-AP1361 (CDD Mode)	

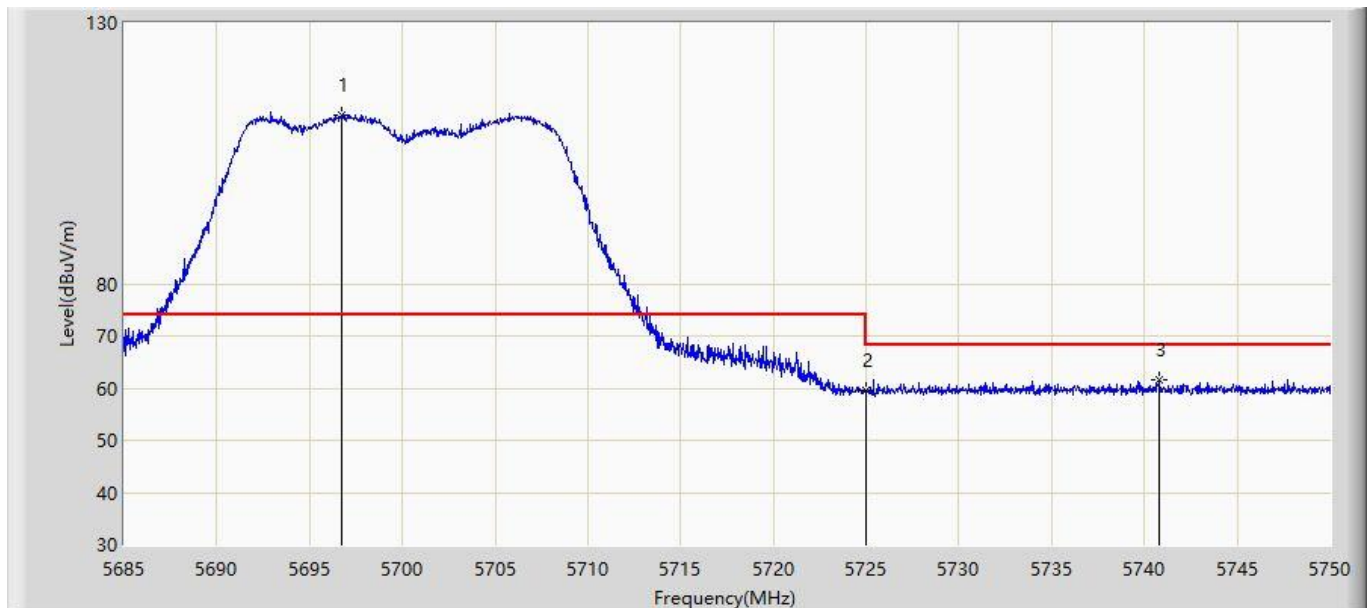


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5696.765	112.252	107.626	N/A	N/A	4.625	PK
2			5725.000	59.598	54.864	-8.602	68.200	4.734	PK
3			5740.835	61.657	56.862	-6.543	68.200	4.794	PK

Test Mode: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/03/16 - 14:32
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT20 at Channel 5700MHz with OAW-AP1361 (CDD Mode)	

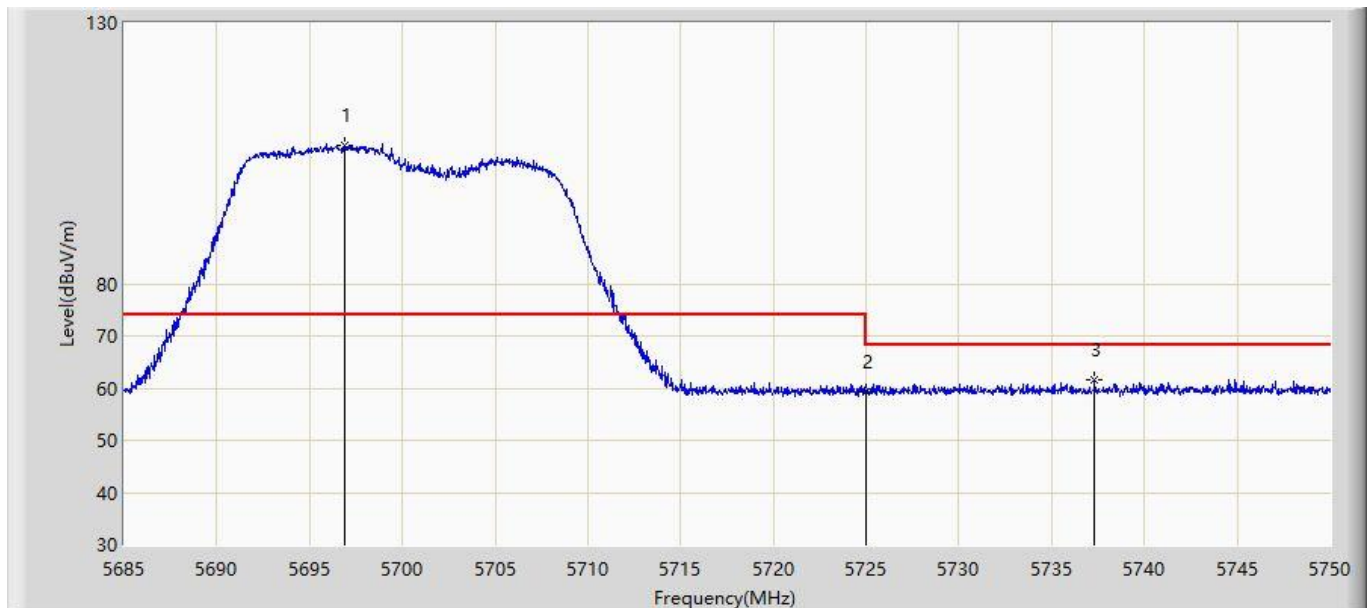


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5696.928	106.652	102.026	N/A	N/A	4.626	PK
2			5725.000	59.270	54.536	-8.930	68.200	4.734	PK
3			5737.325	61.486	56.705	-6.714	68.200	4.781	PK

Test Mode: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/03/16 - 14:33
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT20 at Channel 5745MHz with OAW-AP1361 (CDD Mode)	

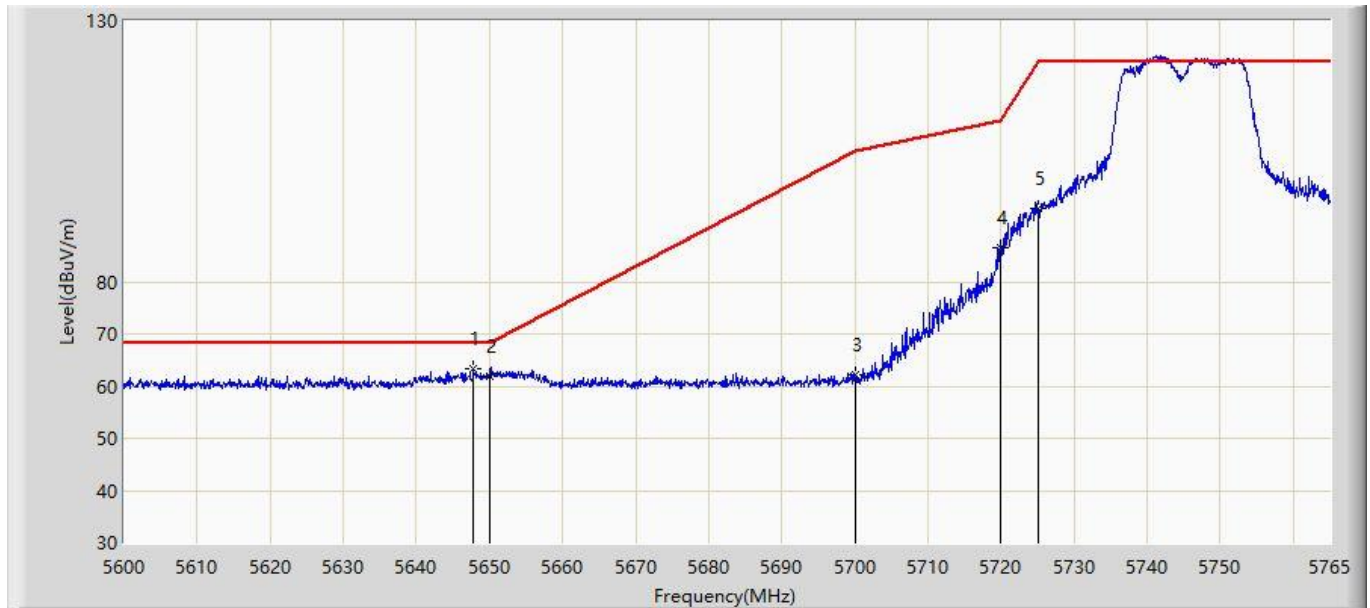


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5647.850	63.295	58.857	-4.905	68.200	4.438	PK
2			5650.000	61.850	57.404	-6.350	68.200	4.446	PK
3			5700.000	62.292	57.654	-42.908	105.200	4.638	PK
4			5720.000	86.510	81.795	-24.290	110.800	4.715	PK
5			5725.000	93.966	89.232	N/A	N/A	4.734	PK

Test Mode: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/03/16 - 14:35
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT20 at Channel 5745MHz with OAW-AP1361 (CDD Mode)	

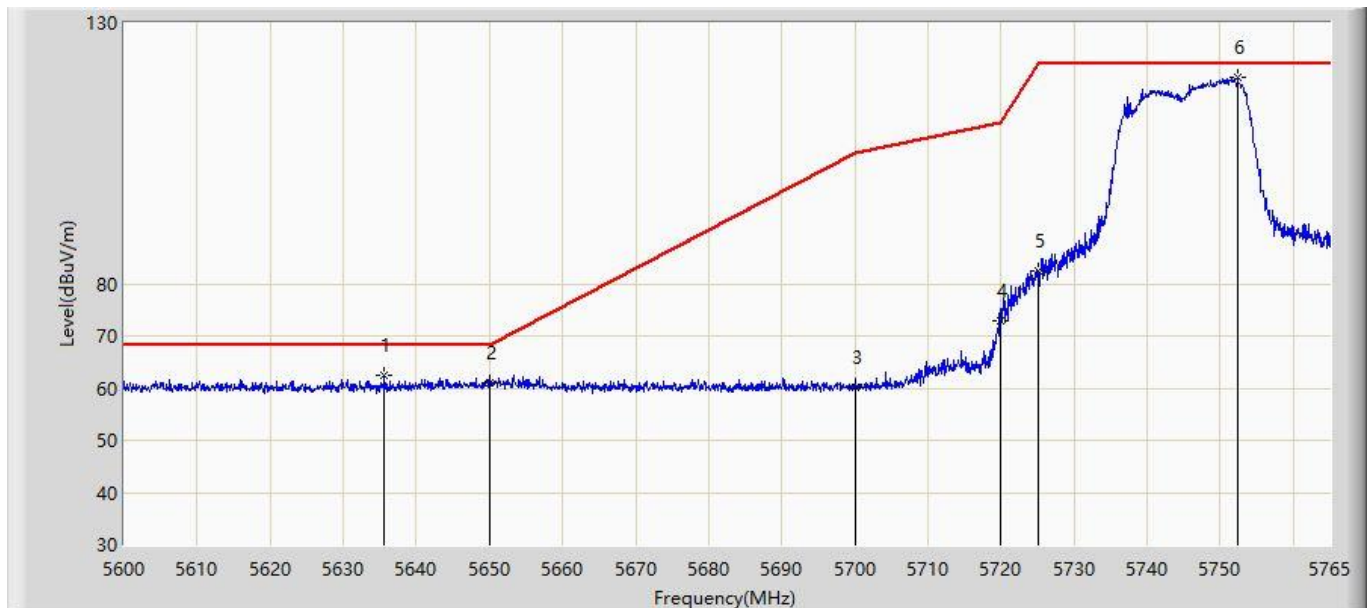


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5635.640	62.435	58.044	-5.765	68.200	4.391	PK
2			5650.000	60.902	56.456	-7.298	68.200	4.446	PK
3			5700.000	60.114	55.476	-45.086	105.200	4.638	PK
4			5720.000	72.781	68.066	-38.019	110.800	4.715	PK
5			5725.000	82.359	77.625	-39.841	122.200	4.734	PK
6		*	5752.377	119.433	114.594	N/A	N/A	4.839	PK

Test Mode: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/03/16 - 14:36
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT20 at Channel 5825MHz with OAW-AP1361 (CDD Mode)	

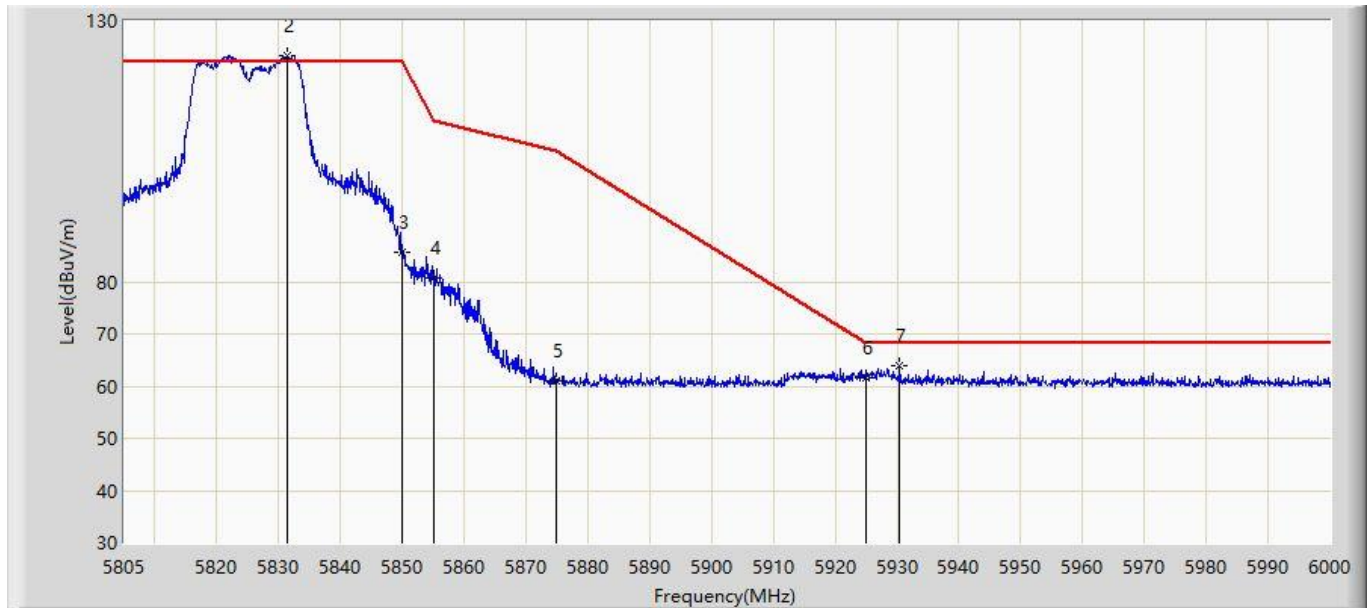


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5635.640	94.640	90.249	26.440	68.200	4.391	PK
2			5831.422	123.441	118.298	N/A	N/A	5.143	PK
3			5850.000	85.662	80.448	-36.538	122.200	5.214	PK
4			5855.000	80.639	75.406	-30.161	110.800	5.233	PK
5			5875.000	60.962	55.652	-44.238	105.200	5.310	PK
6			5925.000	61.595	56.093	-6.605	68.200	5.502	PK
7			5930.385	63.792	58.269	-4.408	68.200	5.522	PK

Test Mode: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/03/16 - 14:37
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT20 at Channel 5825MHz with OAW-AP1361 (CDD Mode)	

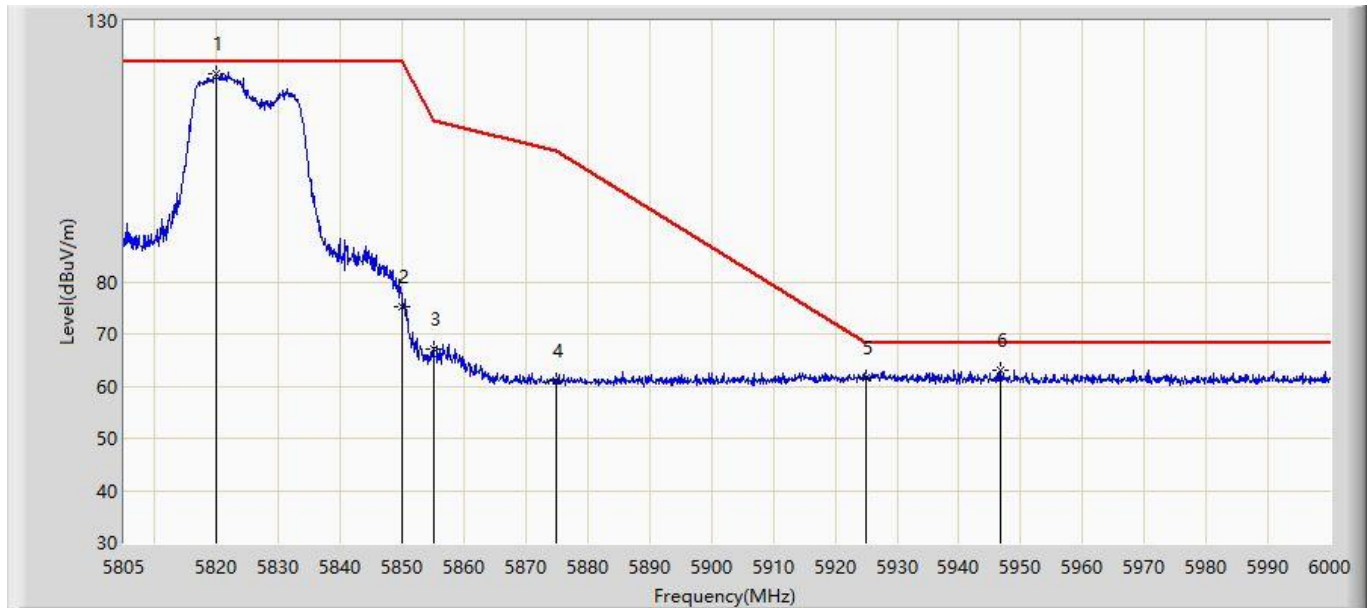


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5819.917	119.938	114.839	N/A	N/A	5.099	PK
2			5850.000	75.262	70.048	-46.938	122.200	5.214	PK
3			5855.000	67.013	61.780	-43.787	110.800	5.233	PK
4			5875.000	60.929	55.619	-44.271	105.200	5.310	PK
5			5925.000	61.709	56.207	-6.491	68.200	5.502	PK
6			5946.765	63.131	57.545	-5.069	68.200	5.587	PK

Test Mode: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/03/16 - 14:56
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT40 at Channel 5190MHz with OAW-AP1361 (CDD Mode)	

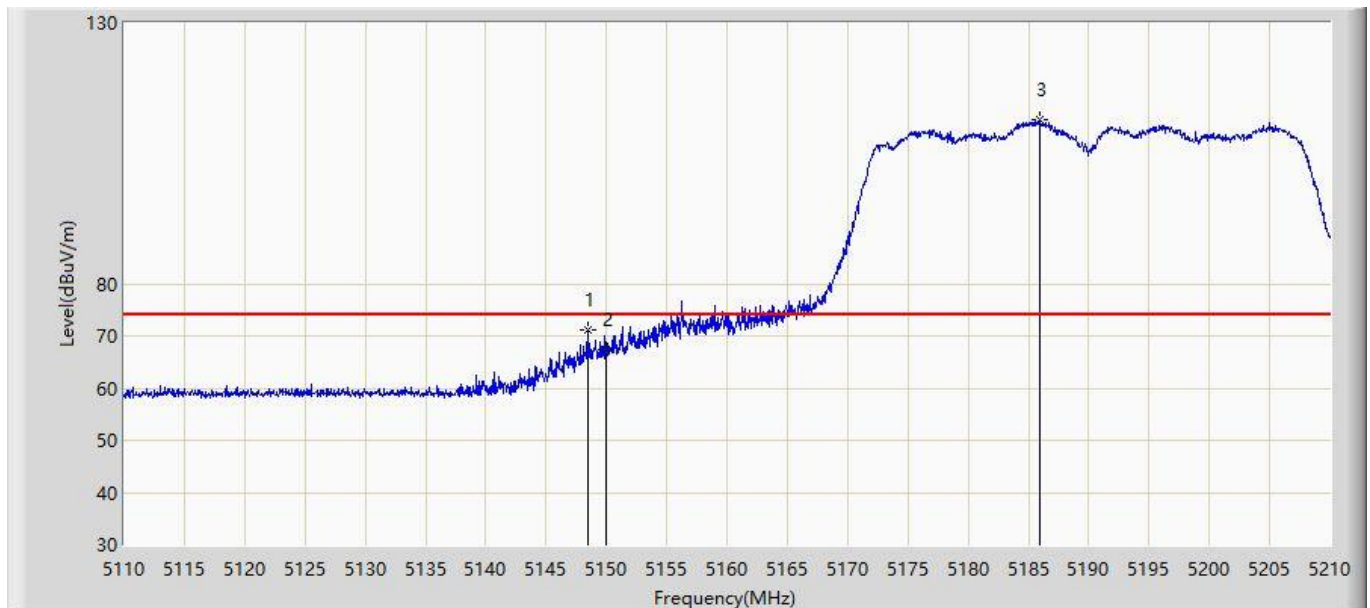


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5148.500	71.132	67.487	-2.868	74.000	3.645	PK
2			5150.000	67.462	63.816	-6.538	74.000	3.646	PK
3		*	5185.900	111.461	107.792	N/A	N/A	3.669	PK

Test Mode: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/03/16 - 14:53
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT40 at Channel 5190MHz with OAW-AP1361 (CDD Mode)	

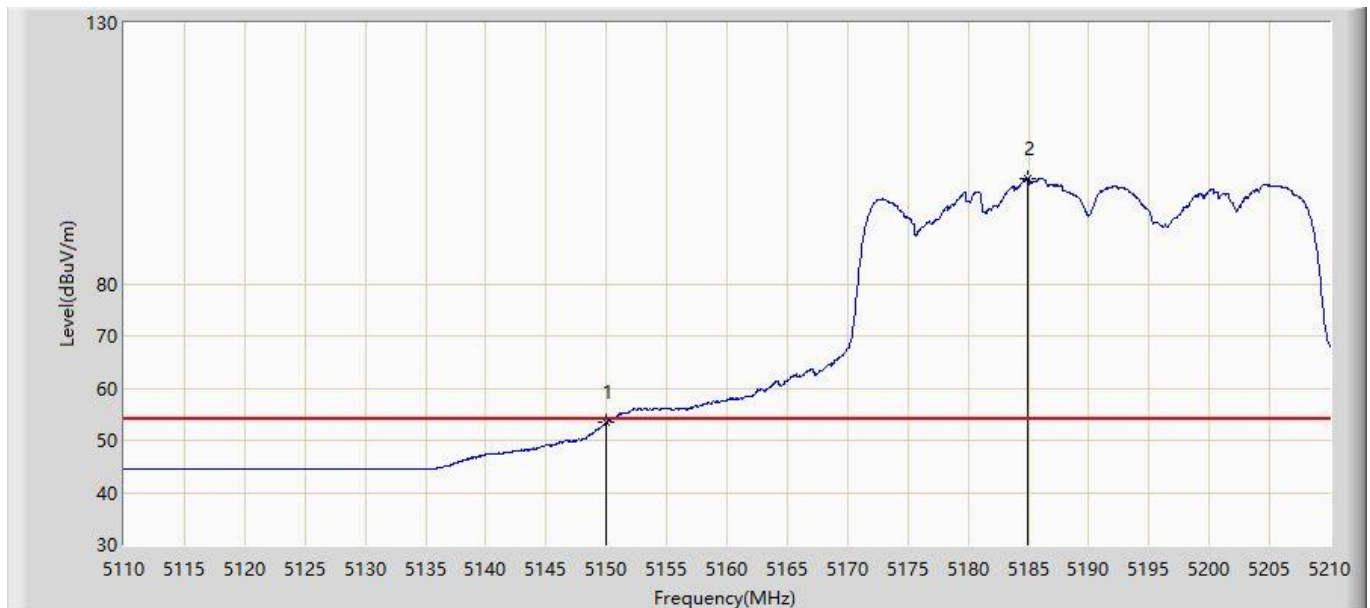


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	53.379	49.733	-0.621	54.000	3.646	AV
2		*	5184.900	100.126	96.458	N/A	N/A	3.669	AV

Test Mode: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/03/16 - 14:57
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT40 at Channel 5190MHz with OAW-AP1361 (CDD Mode)	

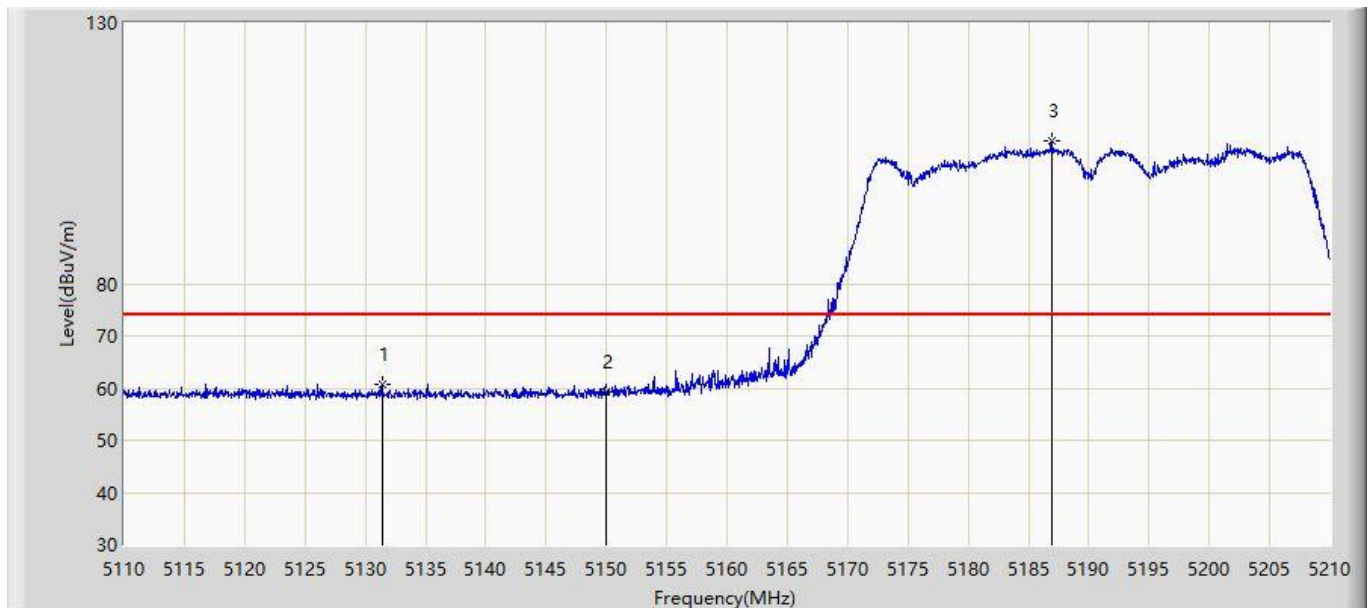


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5131.400	60.673	57.039	-13.327	74.000	3.634	PK
2			5150.000	59.180	55.534	-14.820	74.000	3.646	PK
3		*	5187.000	107.296	103.626	N/A	N/A	3.669	PK

Test Mode: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/03/16 - 15:00
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT40 at Channel 5190MHz with OAW-AP1361 (CDD Mode)	

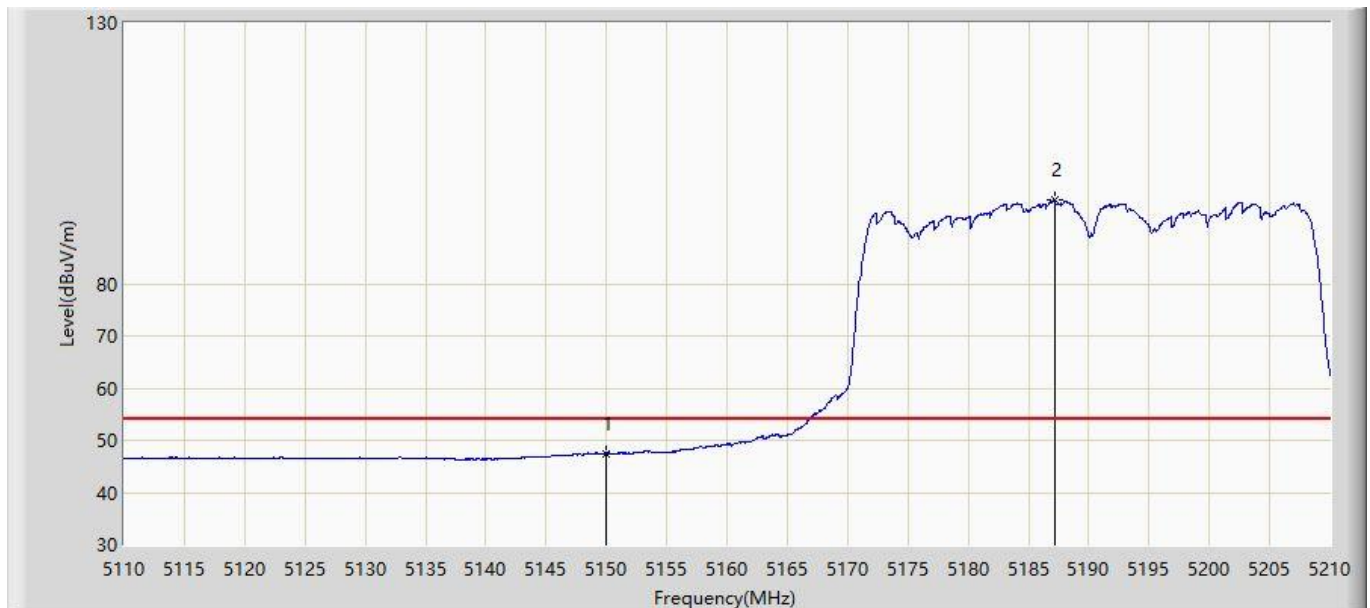


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	47.508	43.862	-6.492	54.000	3.646	AV
2		*	5187.200	96.022	92.352	N/A	N/A	3.670	AV

Test Mode: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/03/16 - 15:14
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT40 at Channel 5310MHz with OAW-AP1361 (CDD Mode)	

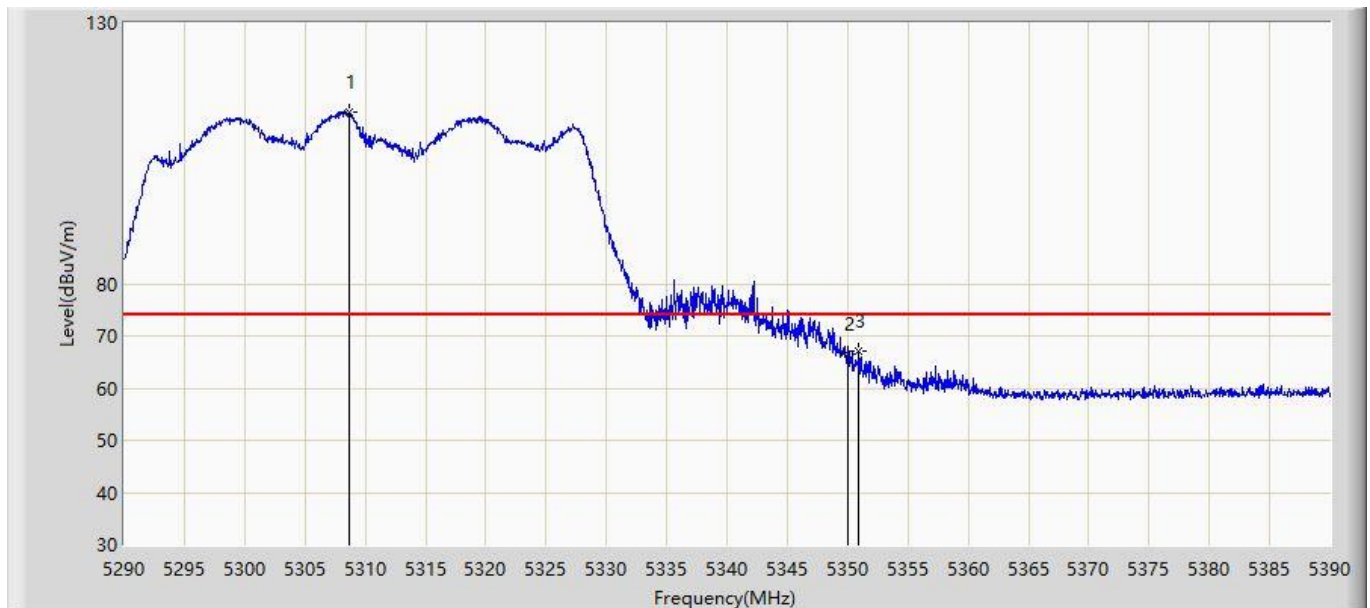


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5308.650	112.832	109.084	N/A	N/A	3.748	PK
2			5350.000	66.448	62.674	-7.552	74.000	3.774	PK
3			5350.950	67.151	63.377	-6.849	74.000	3.774	PK

Test Mode: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/03/16 - 15:09
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT40 at Channel 5310MHz with OAW-AP1361 (CDD Mode)	

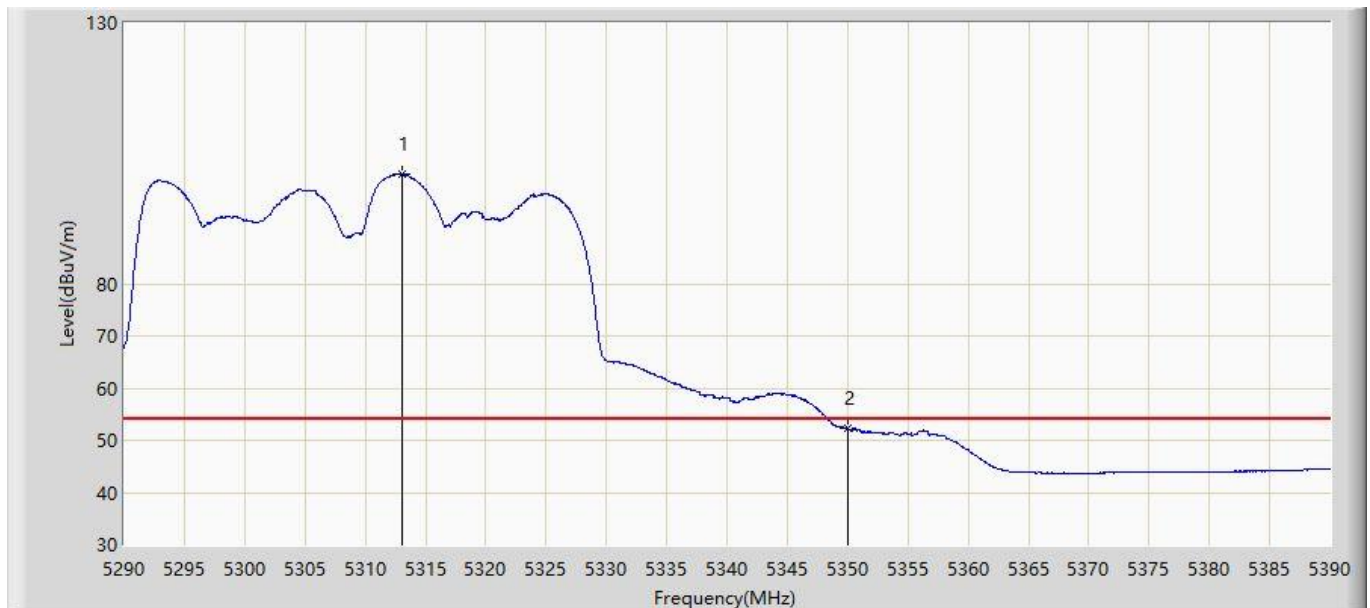


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5313.100	100.990	97.239	N/A	N/A	3.751	AV
2			5350.000	52.187	48.413	-1.813	54.000	3.774	AV

Test Mode: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/03/16 - 15:11
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT40 at Channel 5310MHz with OAW-AP1361 (CDD Mode)	

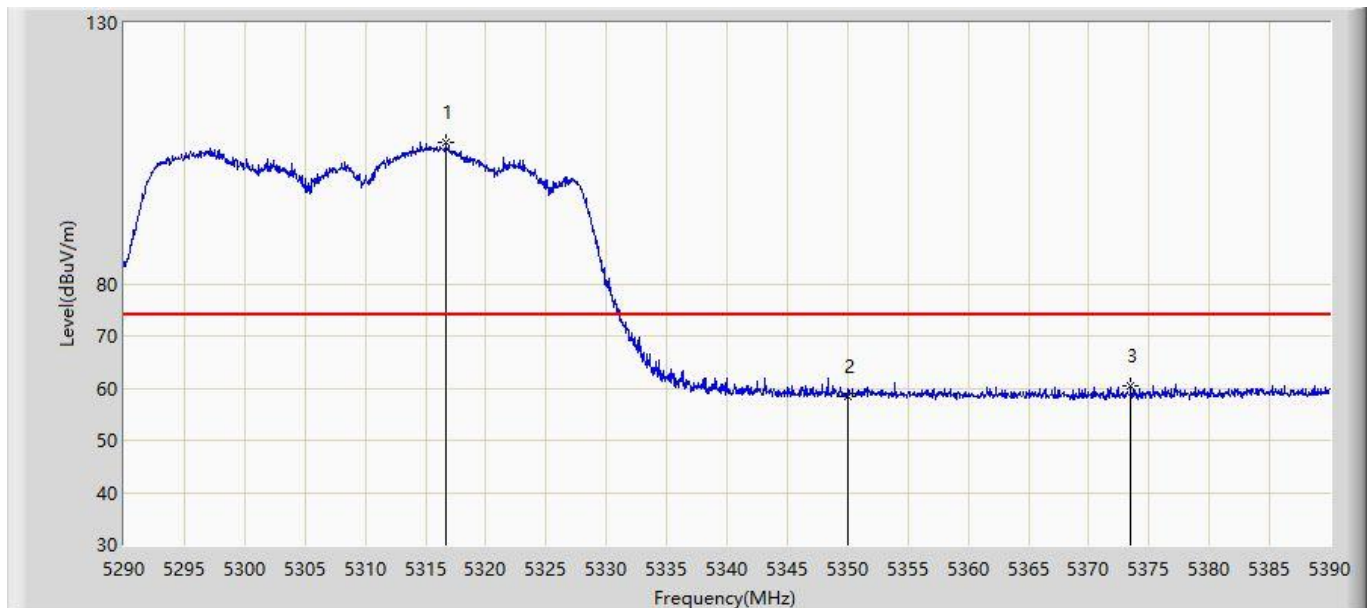


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5316.700	107.098	103.345	N/A	N/A	3.753	PK
2			5350.000	58.448	54.674	-15.552	74.000	3.774	PK
3			5373.500	60.532	56.743	-13.468	74.000	3.789	PK

Test Mode: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/03/16 - 15:13
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT40 at Channel 5310MHz with OAW-AP1361 (CDD Mode)	

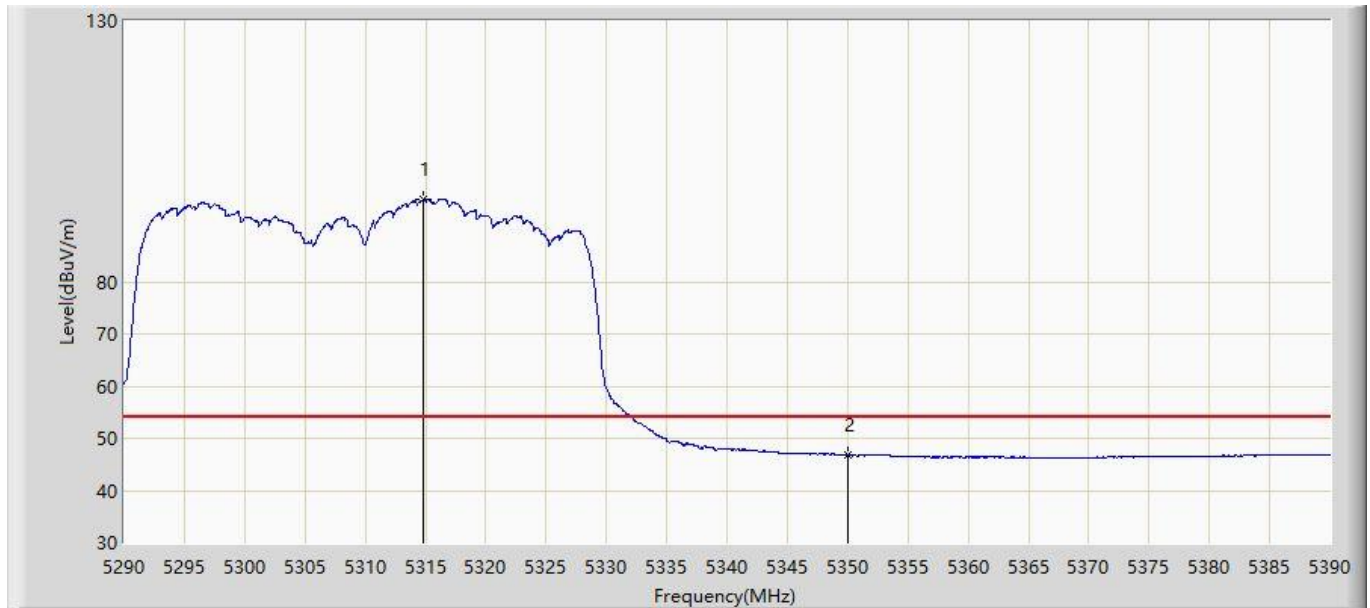


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5314.750	95.686	91.934	N/A	N/A	3.751	AV
2			5350.000	46.716	42.942	-7.284	54.000	3.774	AV

Test Mode: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/03/16 - 15:26
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT40 at Channel 5510MHz with OAW-AP1361 (CDD Mode)	

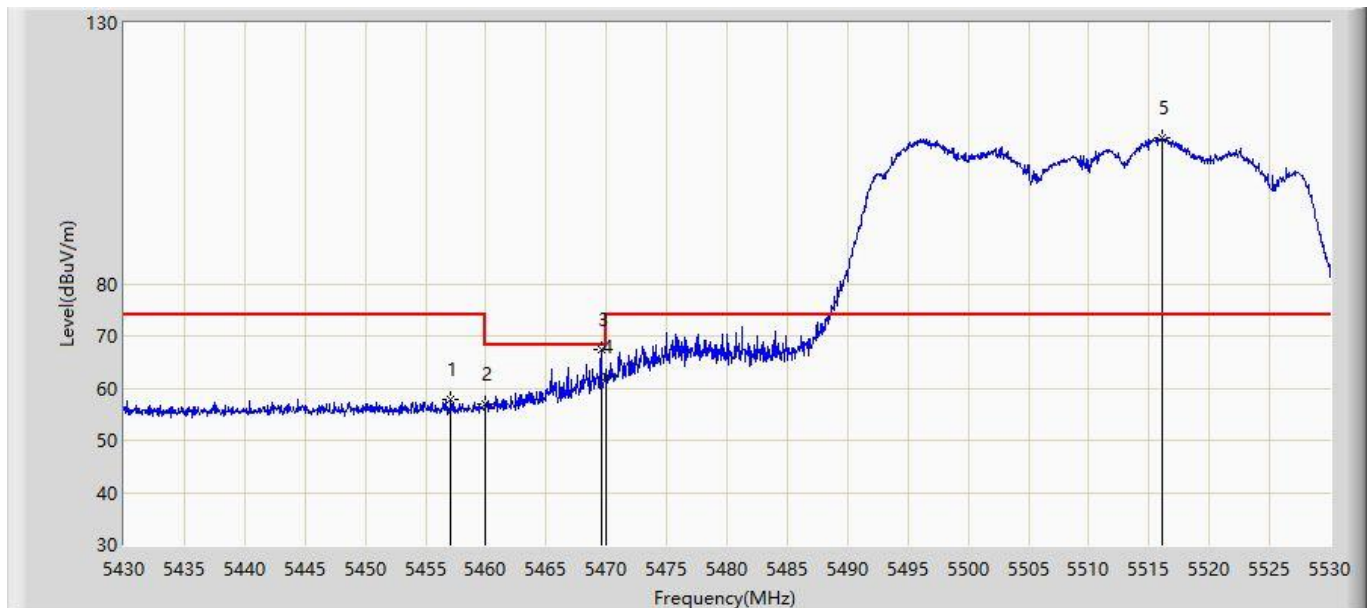


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5457.100	57.862	54.020	-16.138	74.000	3.842	PK
2			5460.000	56.819	52.975	-17.181	74.000	3.844	PK
3			5469.550	67.396	63.546	-0.804	68.200	3.850	PK
4			5470.000	62.204	58.353	-5.996	68.200	3.850	PK
5		*	5516.100	107.968	104.036	N/A	N/A	3.932	PK

Test Mode: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/03/16 - 15:27
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT40 at Channel 5510MHz with OAW-AP1361 (CDD Mode)	

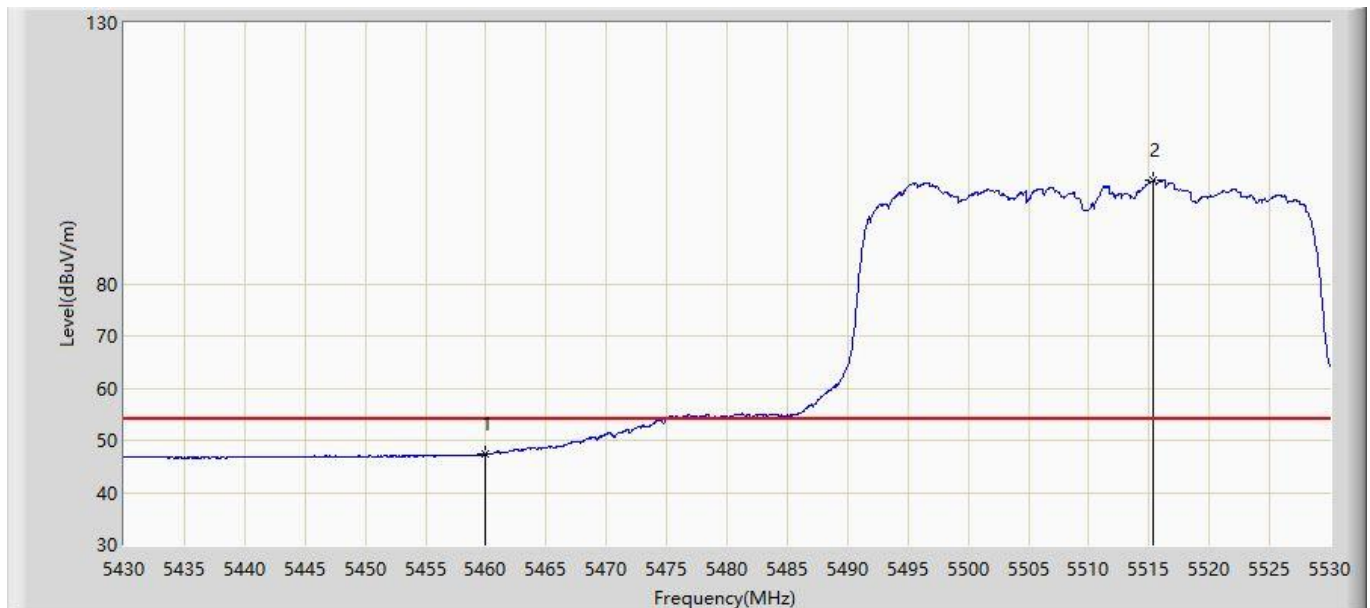


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	47.375	43.531	-6.625	54.000	3.844	AV
2		*	5515.350	99.817	95.888	N/A	N/A	3.929	AV

Test Mode: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/03/16 - 15:28
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT40 at Channel 5510MHz with OAW-AP1361 (CDD Mode)	

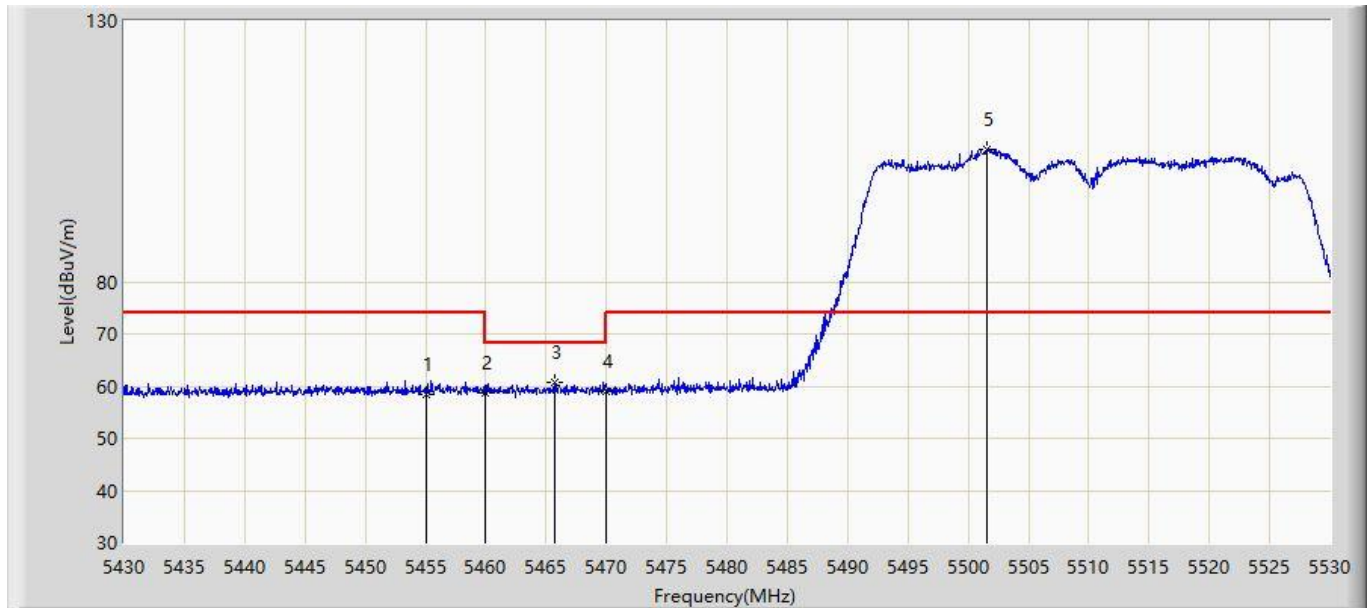


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5455.000	58.527	54.686	-15.473	74.000	3.841	PK
2			5460.000	58.555	54.711	-15.445	74.000	3.844	PK
3			5465.700	60.586	56.738	-7.614	68.200	3.848	PK
4			5470.000	59.124	55.273	-9.076	68.200	3.850	PK
5		*	5501.600	105.487	101.603	N/A	N/A	3.884	PK

Test Mode: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/03/16 - 15:29
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT40 at Channel 5510MHz with OAW-AP1361 (CDD Mode)	

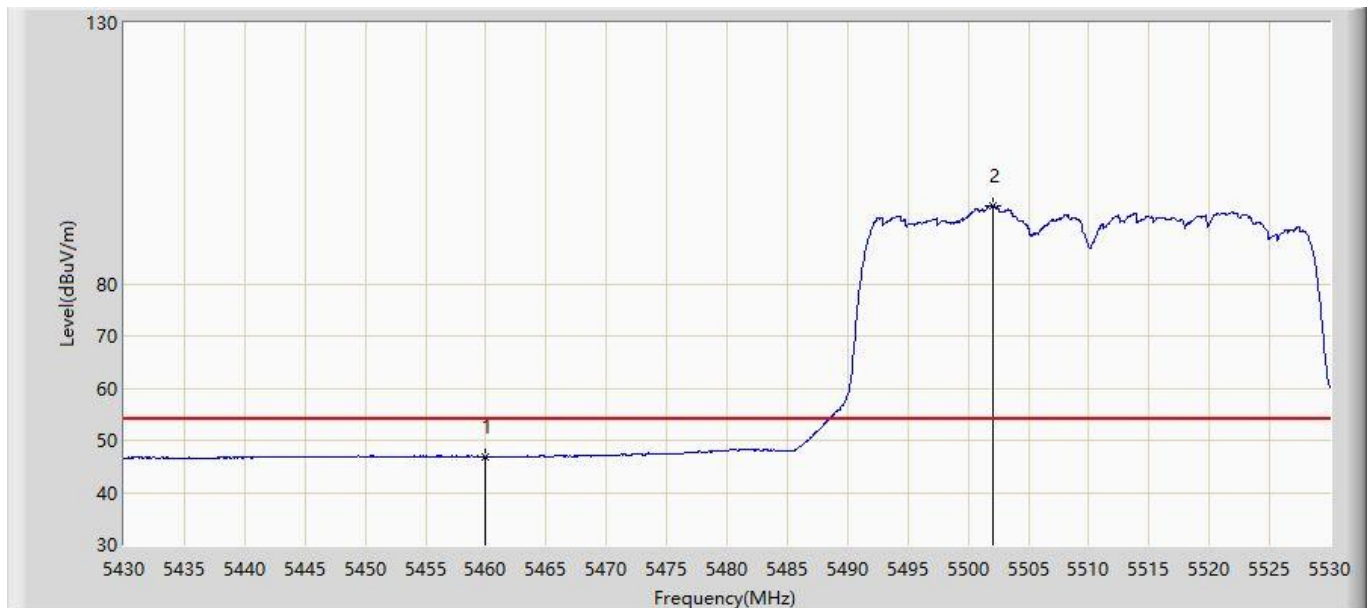


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	46.915	43.071	-7.085	54.000	3.844	AV
2		*	5502.100	95.037	91.152	N/A	N/A	3.885	AV

Test Mode: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/03/16 - 15:31
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT40 at Channel 5670MHz with OAW-AP1361 (CDD Mode)	

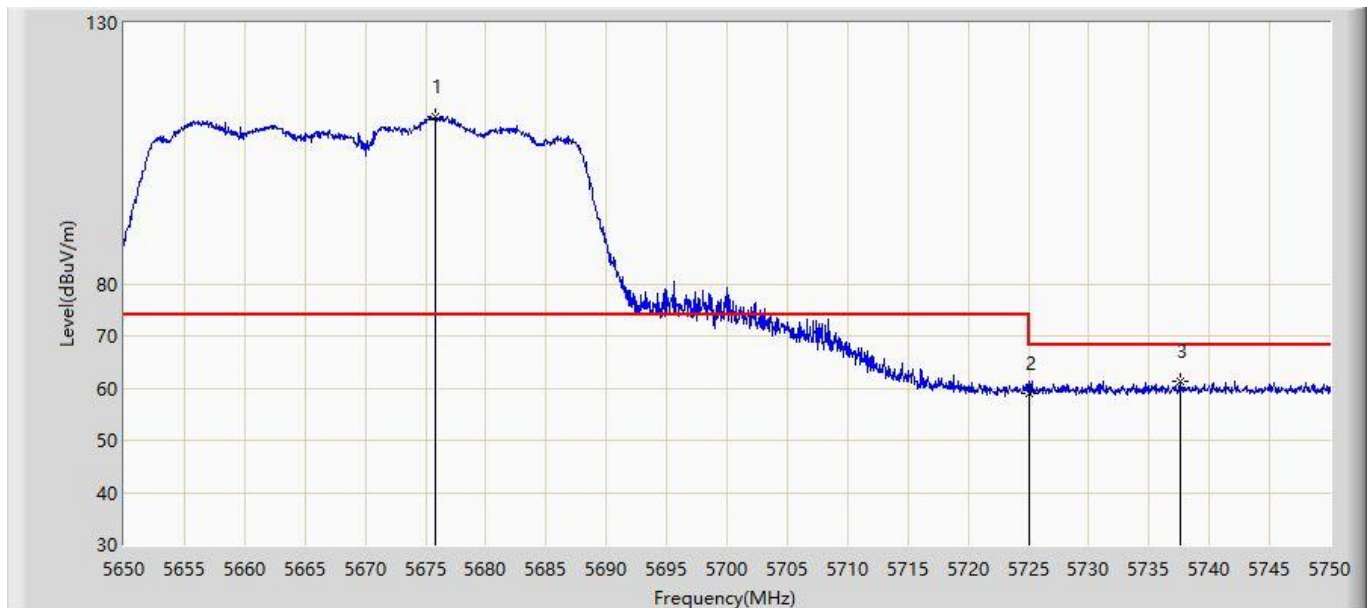


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5675.850	112.042	107.497	N/A	N/A	4.546	PK
2			5725.000	58.982	54.248	-9.218	68.200	4.734	PK
3			5737.650	61.411	56.629	-6.789	68.200	4.782	PK

Test Mode: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/03/16 - 15:33
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT40 at Channel 5670MHz with OAW-AP1361 (CDD Mode)	

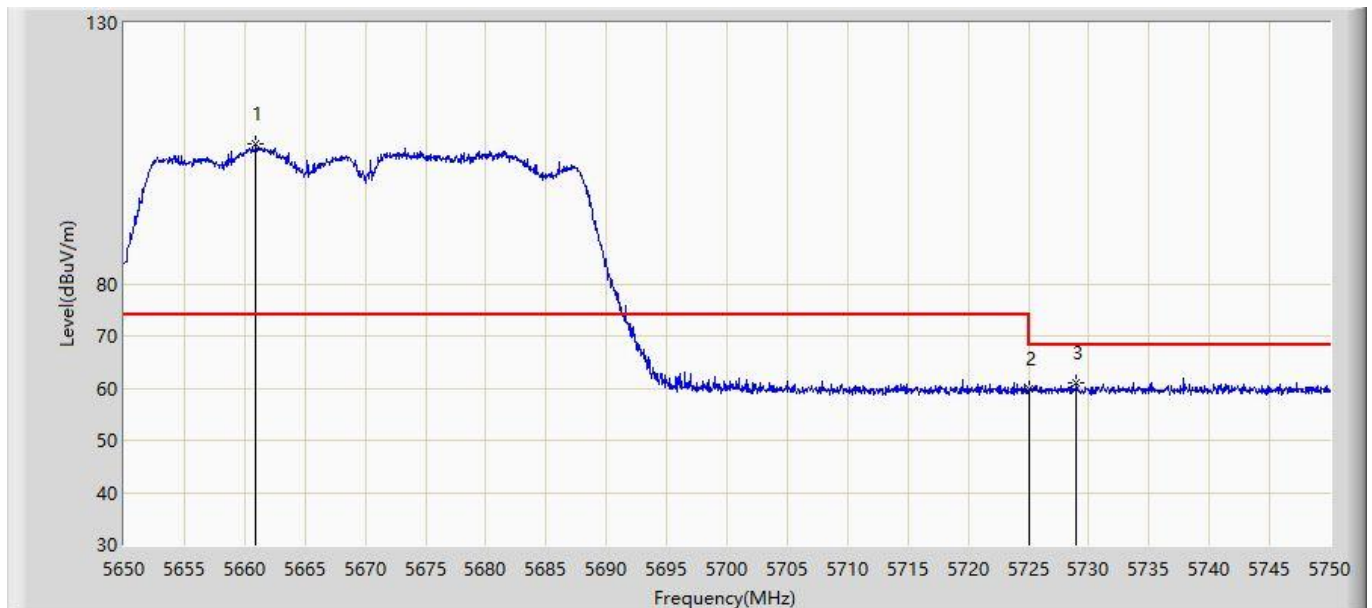


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5660.950	106.789	102.301	N/A	N/A	4.487	PK
2			5725.000	59.861	55.127	-8.339	68.200	4.734	PK
3			5729.000	61.035	56.286	-7.165	68.200	4.749	PK

Test Mode: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/03/16 - 15:35
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT40 at Channel 5755MHz with OAW-AP1361 (CDD Mode)	

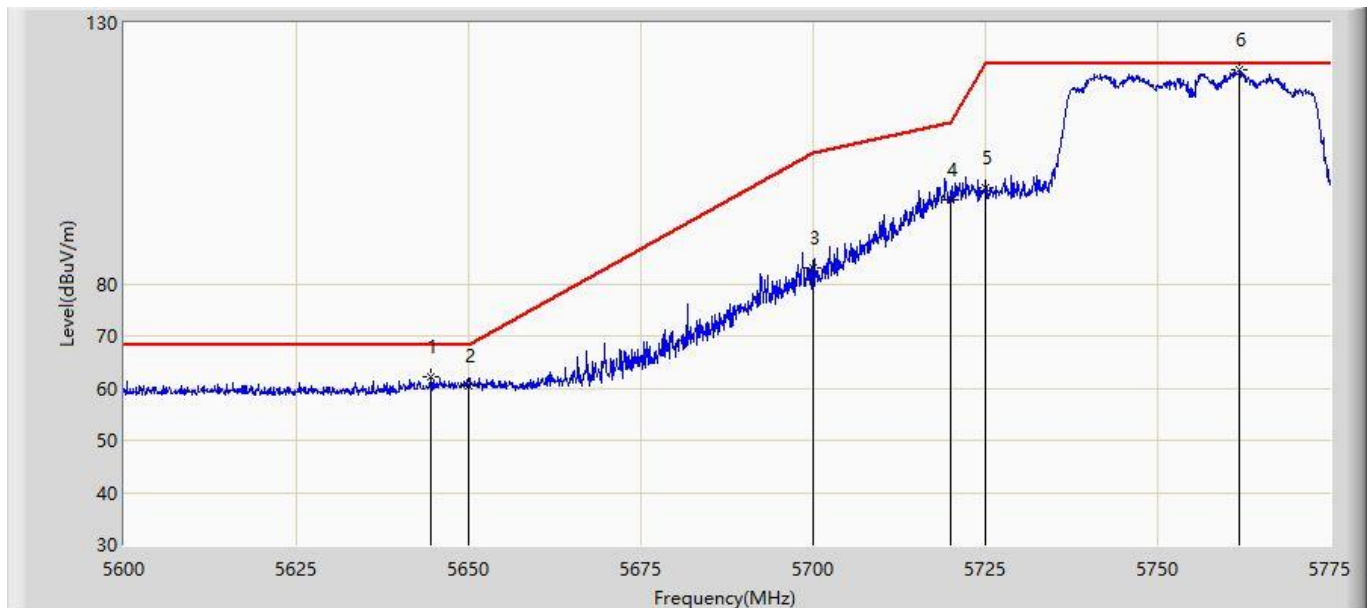


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5644.625	62.160	57.734	-6.040	68.200	4.425	PK
2			5650.000	60.373	55.927	-7.827	68.200	4.446	PK
3			5700.000	83.104	78.466	-22.096	105.200	4.638	PK
4			5720.000	96.097	91.382	-14.703	110.800	4.715	PK
5			5725.000	98.482	93.748	-23.718	122.200	4.734	PK
6		*	5761.875	120.926	116.051	N/A	N/A	4.875	PK

Test Mode: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/03/16 - 15:37
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT40 at Channel 5755MHz with OAW-AP1361 (CDD Mode)	

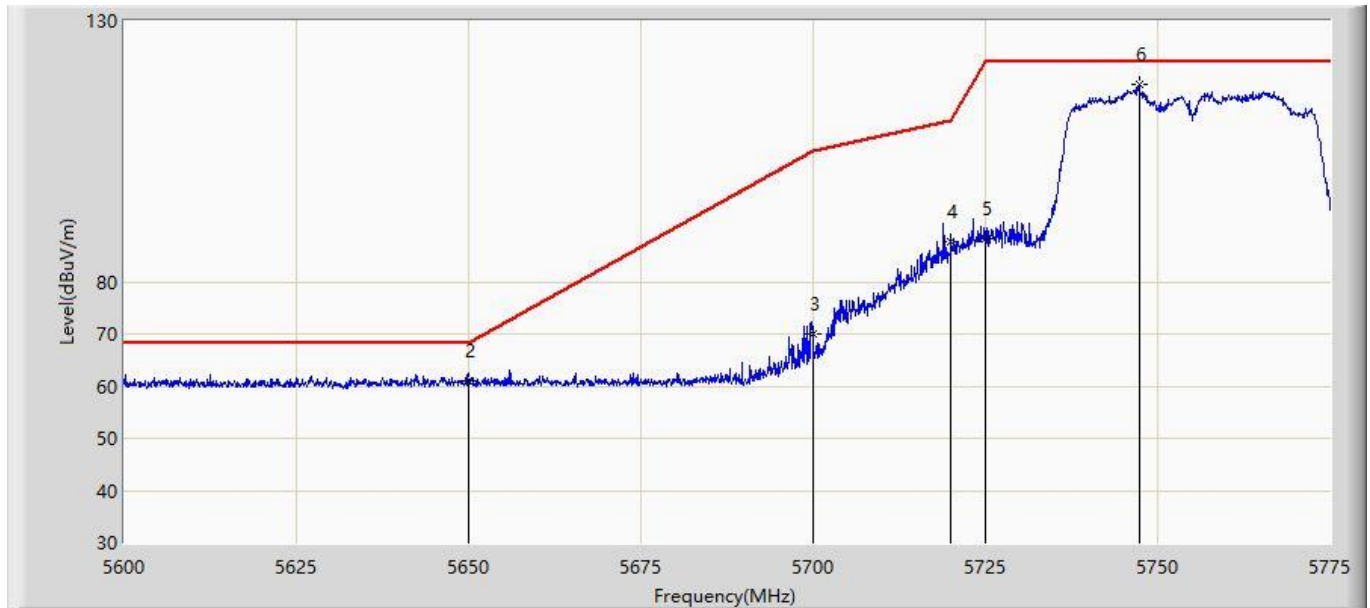


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5462.263	60.601	56.756	-7.599	68.200	3.845	PK
2			5650.000	60.882	56.436	-7.318	68.200	4.446	PK
3			5700.000	70.134	65.496	-35.066	105.200	4.638	PK
4			5720.000	87.574	82.859	-23.226	110.800	4.715	PK
5			5725.000	88.234	83.500	-33.966	122.200	4.734	PK
6		*	5747.263	117.800	112.981	N/A	N/A	4.819	PK

Test Mode: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/03/16 - 15:40
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT40 at Channel 5795MHz with OAW-AP1361 (CDD Mode)	

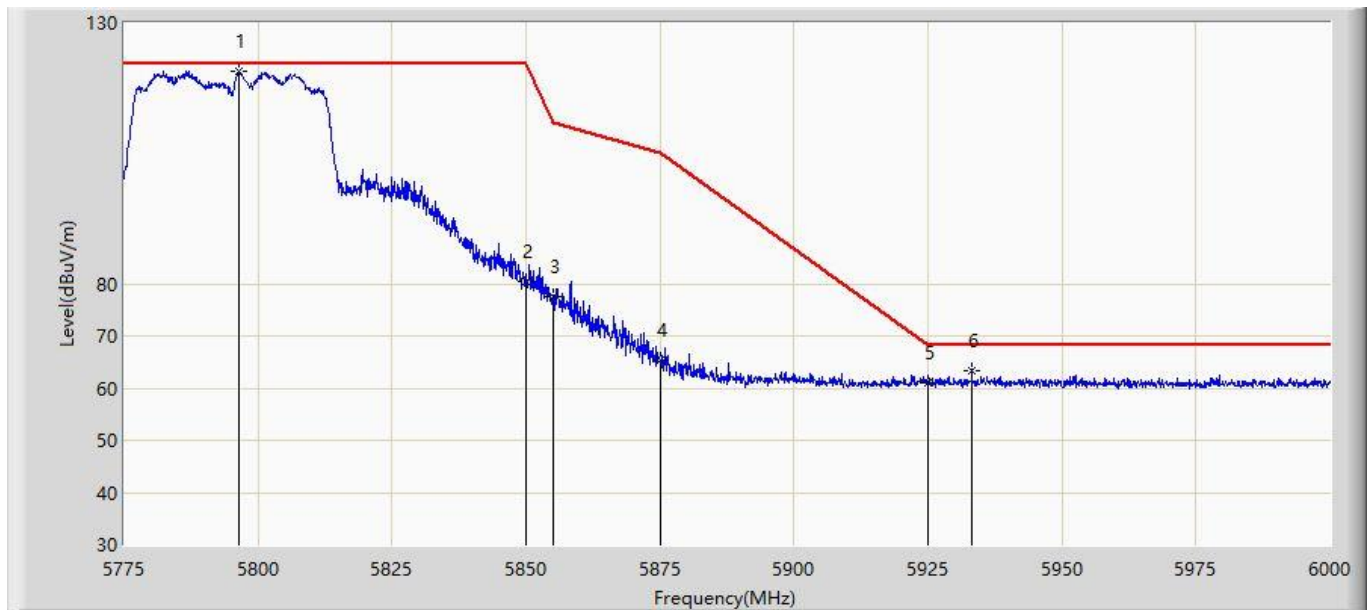


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5796.375	120.849	115.841	N/A	N/A	5.008	PK
2			5850.000	80.454	75.240	-41.746	122.200	5.214	PK
3			5855.000	77.618	72.385	-33.182	110.800	5.233	PK
4			5875.000	65.268	59.958	-39.932	105.200	5.310	PK
5			5925.000	60.942	55.440	-7.258	68.200	5.502	PK
6			5933.175	63.477	57.944	-4.723	68.200	5.534	PK

Test Mode: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/03/16 - 15:44
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT40 at Channel 5795MHz with OAW-AP1361 (CDD Mode)	

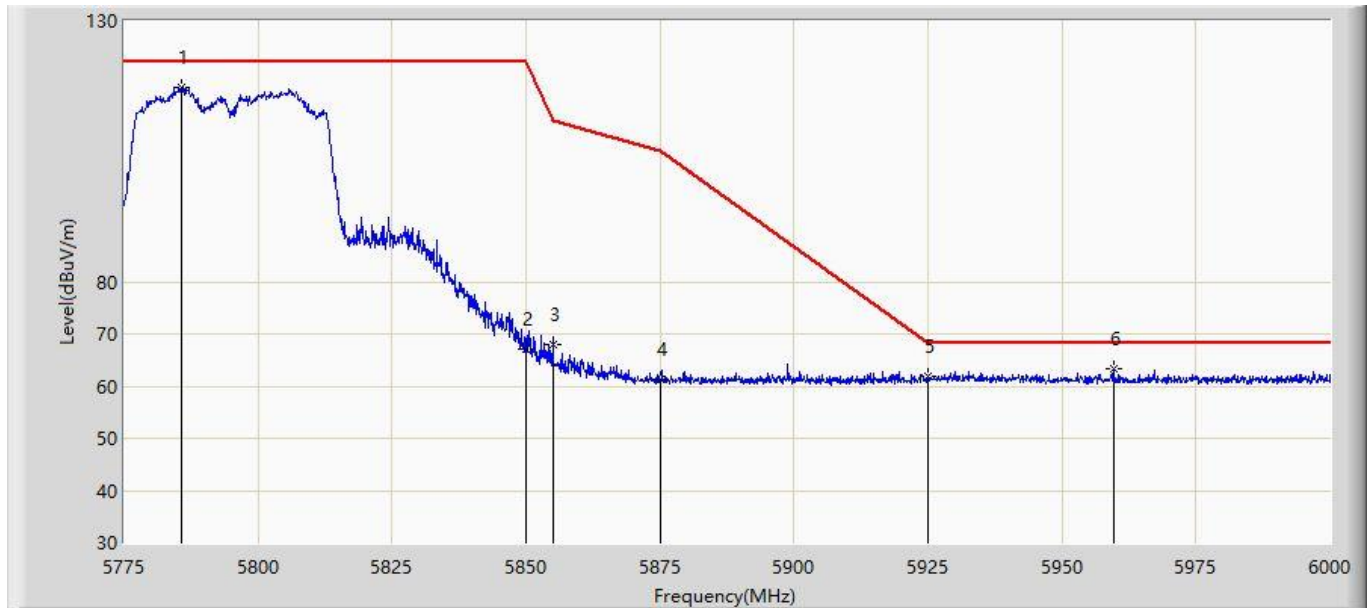


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5785.800	117.183	112.215	N/A	N/A	4.968	PK
2			5850.000	67.080	61.866	-55.120	122.200	5.214	PK
3			5855.000	68.012	62.779	-42.788	110.800	5.233	PK
4			5875.000	61.318	56.008	-43.882	105.200	5.310	PK
5			5925.000	61.762	56.260	-6.438	68.200	5.502	PK
6		*	5959.612	63.217	57.582	-4.983	68.200	5.635	PK

Test Mode: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/03/16 - 19:20
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE20 at Channel 5180MHz with OAW-AP1361 (CDD Mode)	

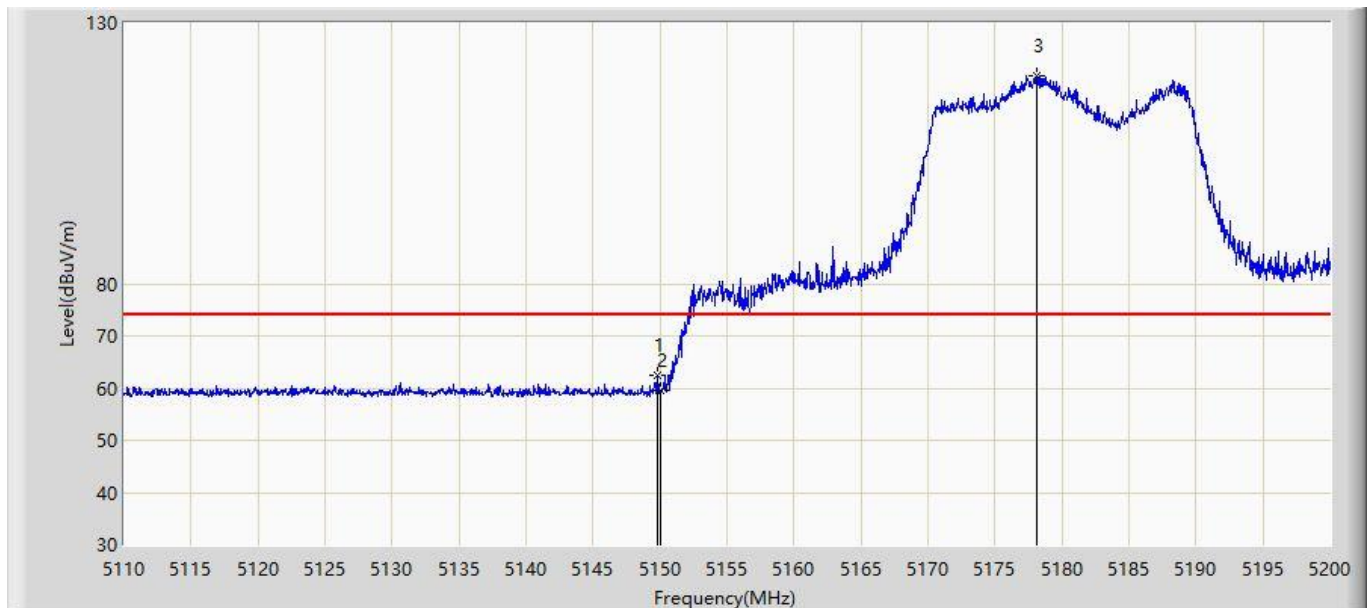

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5149.780	62.582	58.936	-11.418	74.000	3.646	PK
2			5150.000	59.504	55.858	-14.496	74.000	3.646	PK
3		*	5178.175	119.985	116.321	N/A	N/A	3.664	PK

Test Mode: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/03/16 - 19:25
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE20 at Channel 5180MHz with OAW-AP1361 (CDD Mode)	




No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	47.660	44.014	-6.340	54.000	3.646	AV
2	X	*	5178.265	108.433	104.769	N/A	N/A	3.664	AV

Test Mode: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/03/16 - 19:28
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE20 at Channel 5180MHz with OAW-AP1361 (CDD Mode)	

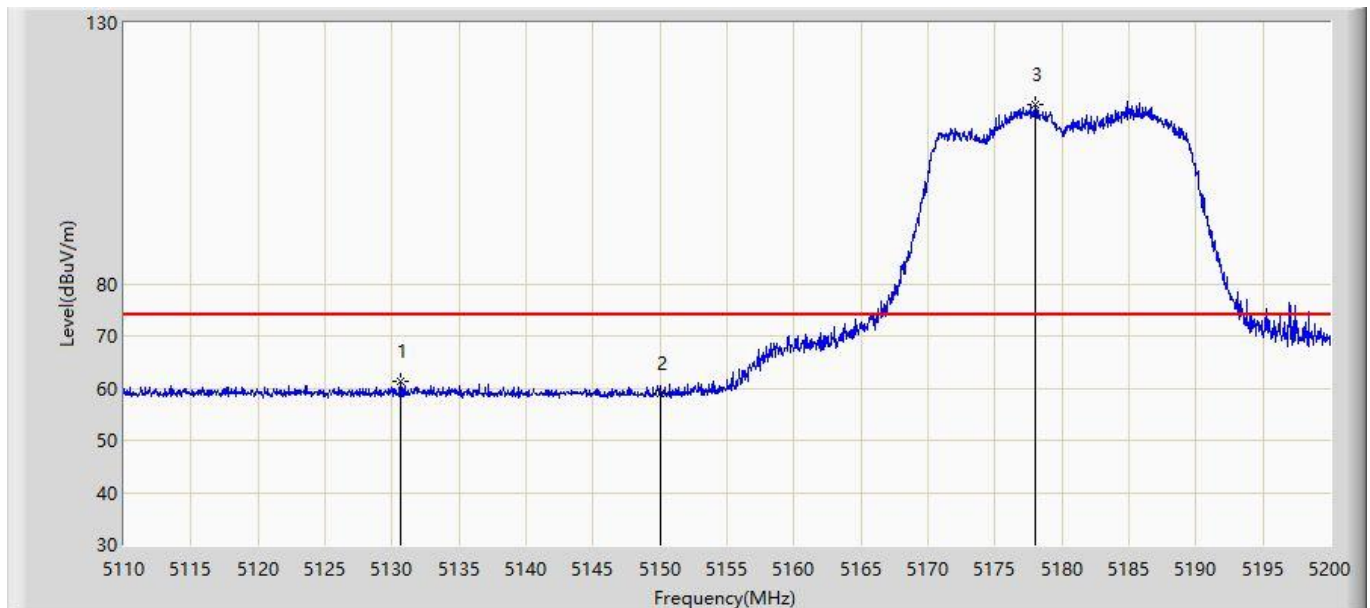


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5130.655	61.277	57.643	-12.723	74.000	3.634	PK
2			5150.000	58.905	55.259	-15.095	74.000	3.646	PK
3		*	5177.995	114.463	110.799	N/A	N/A	3.664	PK

Test Mode: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/03/16 - 19:30
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE20 at Channel 5180MHz with OAW-AP1361 (CDD Mode)	

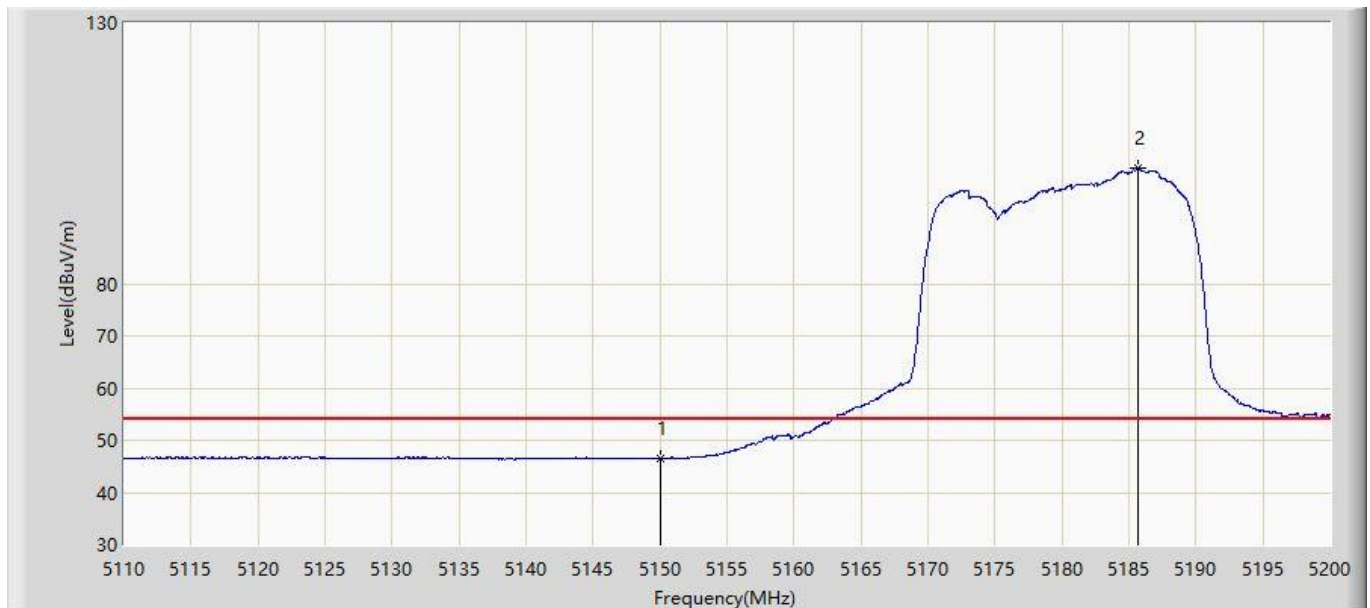


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	46.499	42.853	-7.501	54.000	3.646	AV
2		*	5185.690	102.269	98.600	N/A	N/A	3.668	AV

Test Mode: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/03/16 - 19:31
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE20 at Channel 5320MHz with OAW-AP1361 (CDD Mode)	

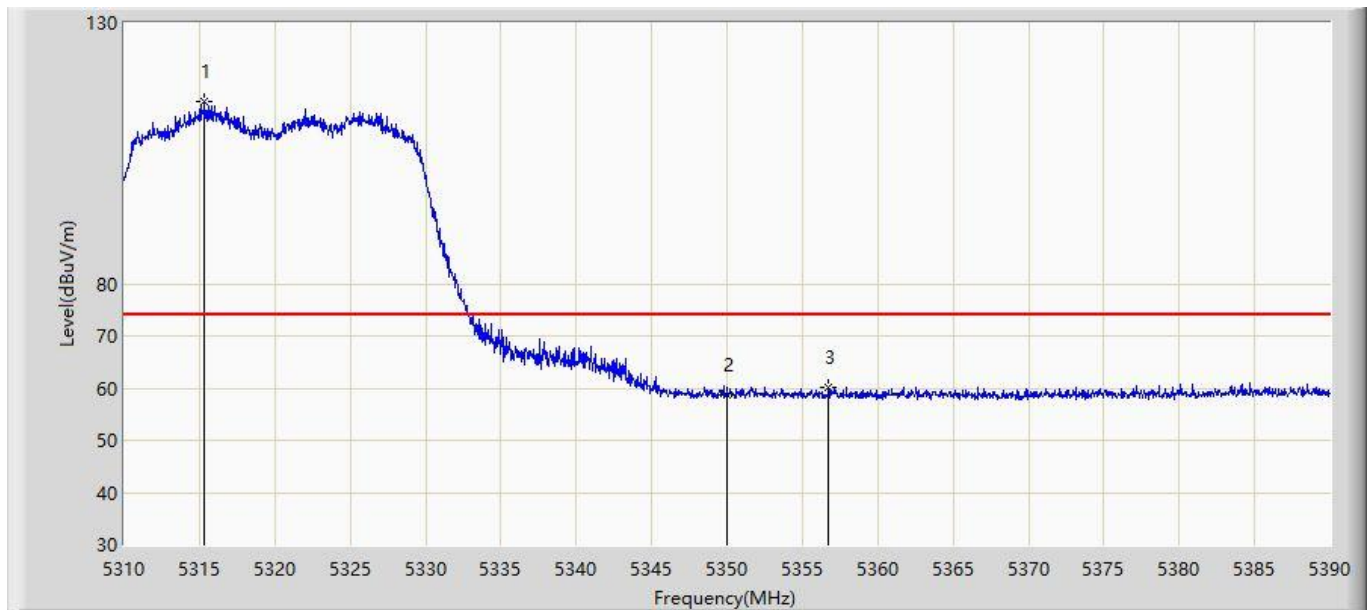


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5315.360	114.784	111.032	N/A	N/A	3.752	PK
2			5350.000	58.785	55.011	-15.215	74.000	3.774	PK
3			5356.760	60.275	56.497	-13.725	74.000	3.778	PK

Test Mode: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/03/16 - 19:33
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE20 at Channel 5320MHz with OAW-AP1361 (CDD Mode)	

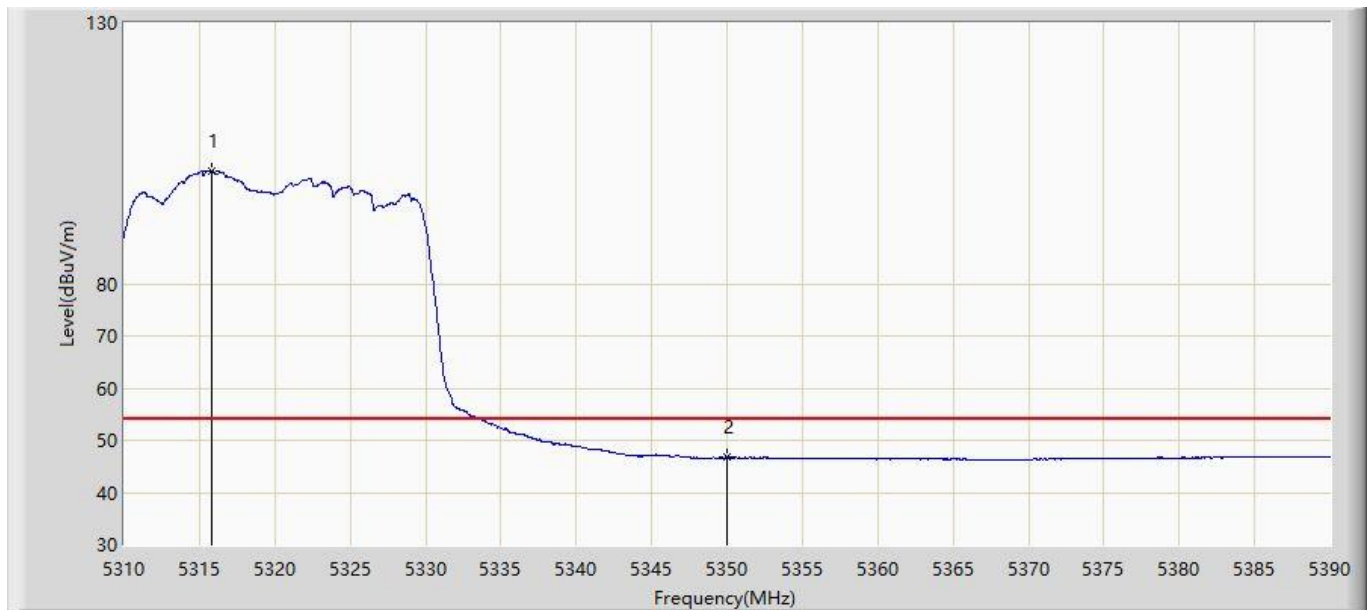


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5315.840	101.596	97.843	N/A	N/A	3.753	AV
2			5350.000	46.757	42.983	-7.243	54.000	3.774	AV

Test Mode: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/03/16 - 19:34
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE20 at Channel 5320MHz with OAW-AP1361 (CDD Mode)	

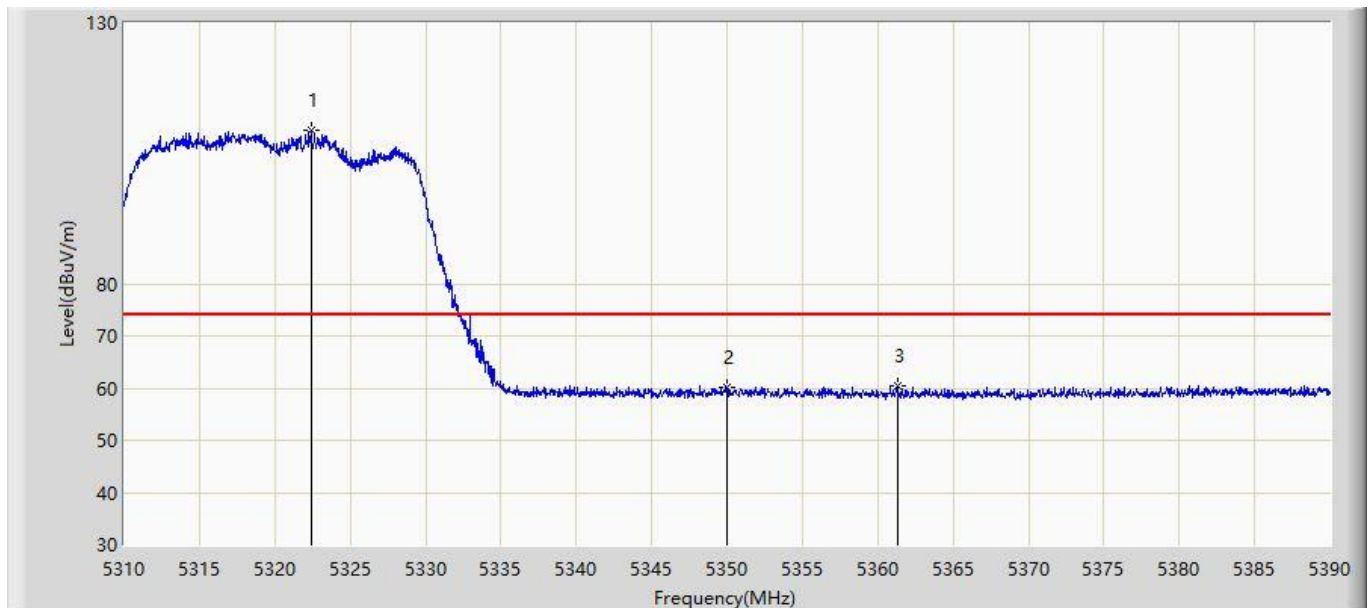


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5322.440	109.498	105.741	N/A	N/A	3.757	PK
2			5350.000	60.079	56.305	-13.921	74.000	3.774	PK
3			5361.320	60.471	56.690	-13.529	74.000	3.781	PK

Test Mode: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/03/16 - 19:35
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE20 at Channel 5320MHz with OAW-AP1361 (CDD Mode)	

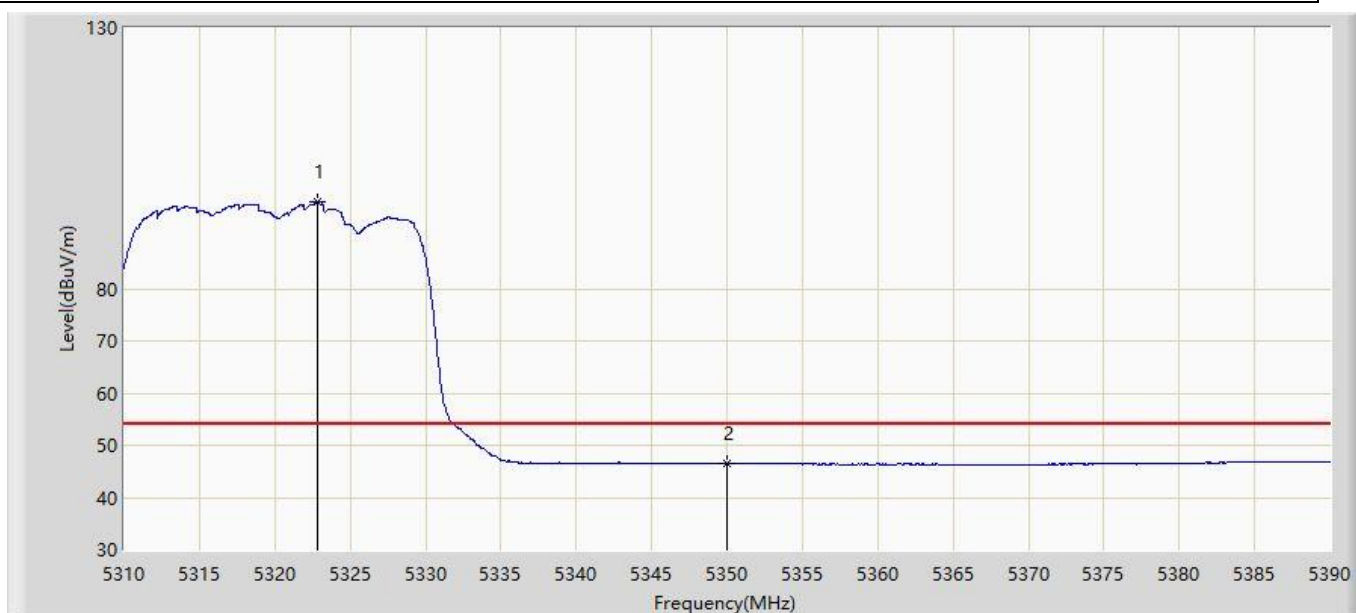


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5322.880	96.636	92.879	N/A	N/A	3.757	AV
2			5350.000	46.486	42.712	-7.514	54.000	3.774	AV

Test Mode: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/03/16 - 19:35
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE20 at Channel 5500MHz with OAW-AP1361 (CDD Mode)	

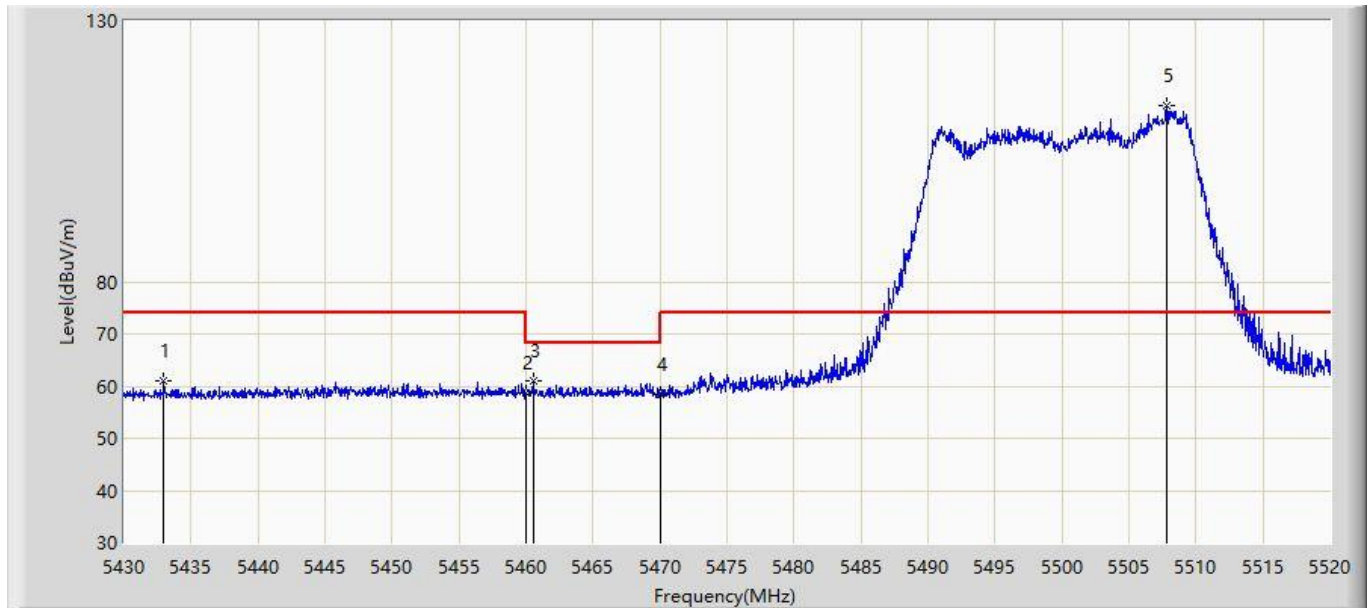


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5432.925	61.042	57.216	-12.958	74.000	3.826	PK
2			5460.000	58.568	54.724	-15.432	74.000	3.844	PK
3			5460.510	60.957	57.113	-7.243	68.200	3.844	PK
4			5470.000	58.547	54.696	-9.653	68.200	3.850	PK
5		*	5507.805	113.676	109.776	N/A	N/A	3.900	PK

Test Mode: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/03/16 - 19:37
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE20 at Channel 5500MHz with OAW-AP1361 (CDD Mode)	

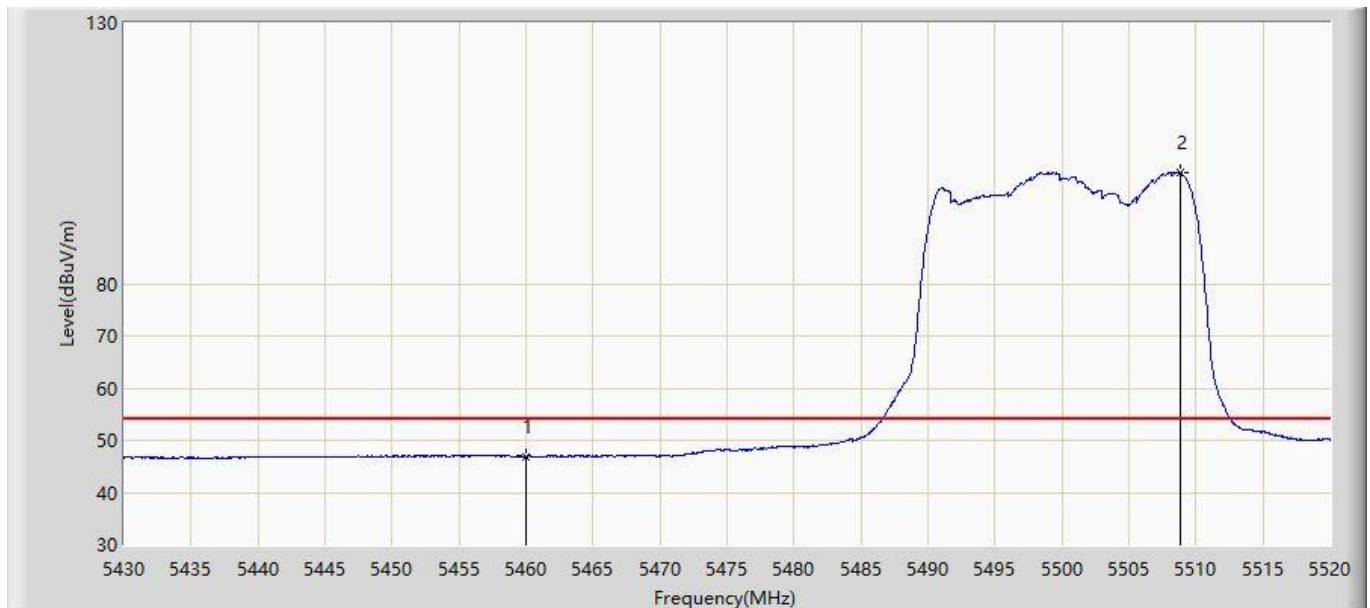


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	46.898	43.054	-7.102	54.000	3.844	AV
2		*	5508.885	101.323	97.419	N/A	N/A	3.905	AV

Test Mode: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/03/16 - 19:37
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE20 at Channel 5500MHz with OAW-AP1361 (CDD Mode)	

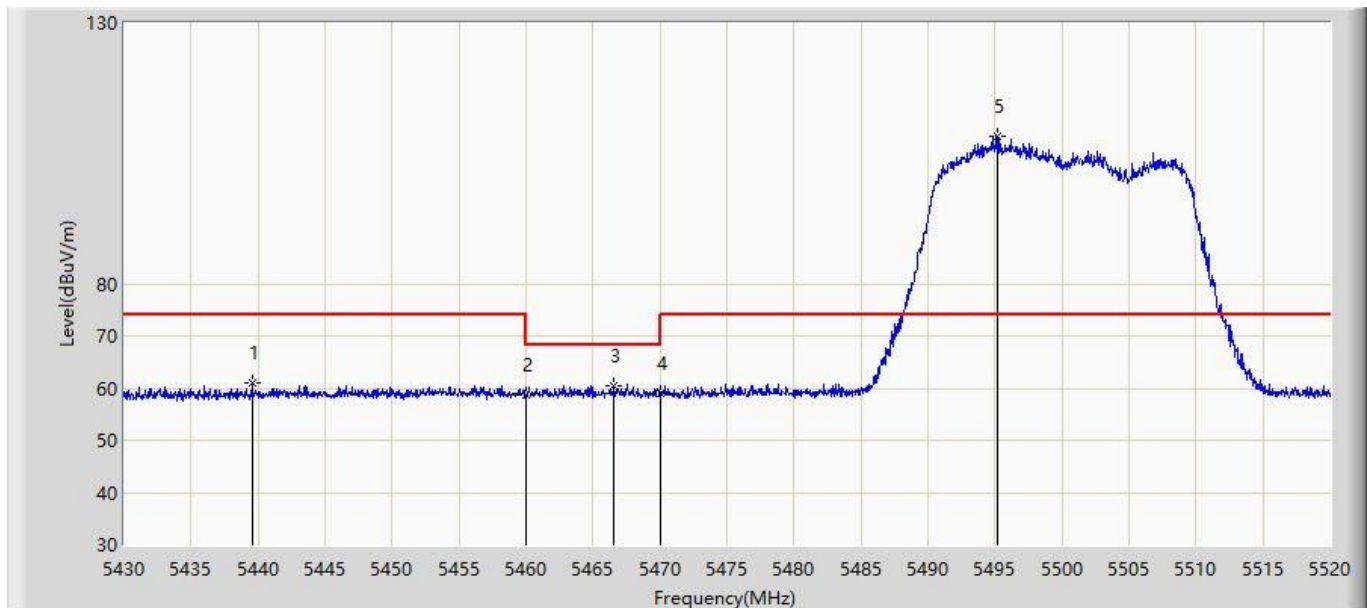


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5439.540	60.918	57.088	-13.082	74.000	3.830	PK
2			5460.000	58.675	54.831	-15.325	74.000	3.844	PK
3			5466.585	60.430	56.582	-7.770	68.200	3.848	PK
4			5470.000	58.866	55.015	-9.334	68.200	3.850	PK
5		*	5495.205	108.384	104.510	N/A	N/A	3.875	PK

Test Mode: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/03/16 - 19:38
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE20 at Channel 5500MHz with OAW-AP1361 (CDD Mode)	

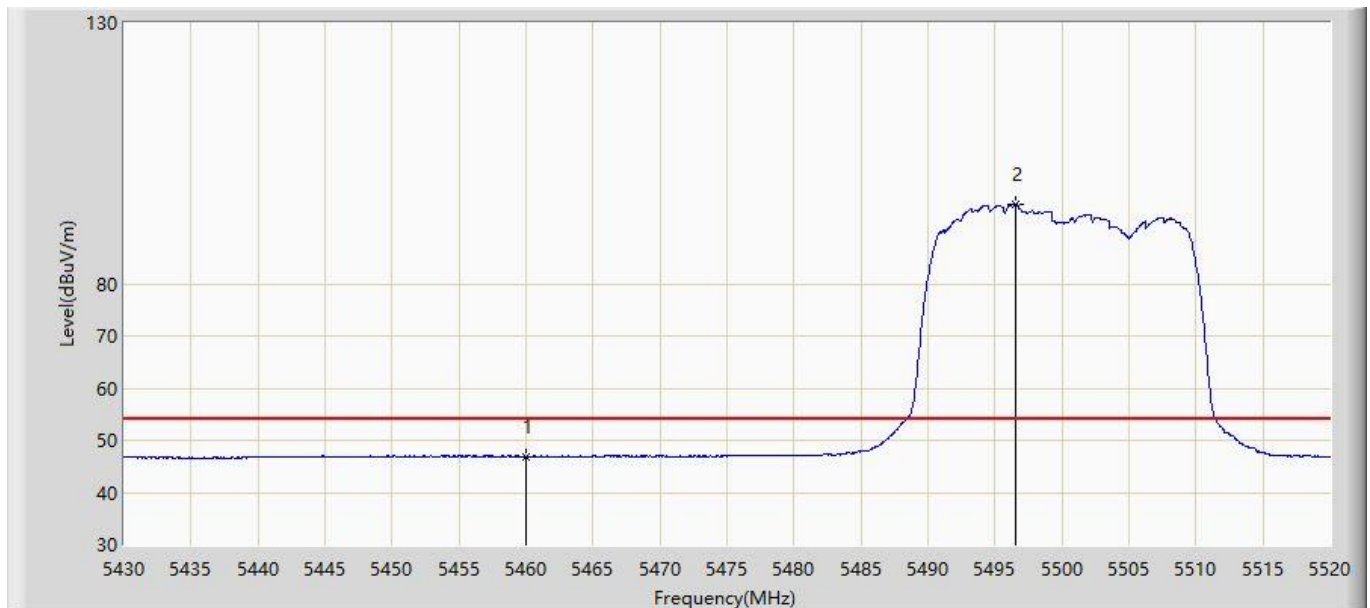


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	46.924	43.080	-7.076	54.000	3.844	AV
2		*	5496.510	95.081	91.205	N/A	N/A	3.876	AV

Test Mode: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/03/16 - 19:39
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE20 at Channel 5700MHz with OAW-AP1361 (CDD Mode)	

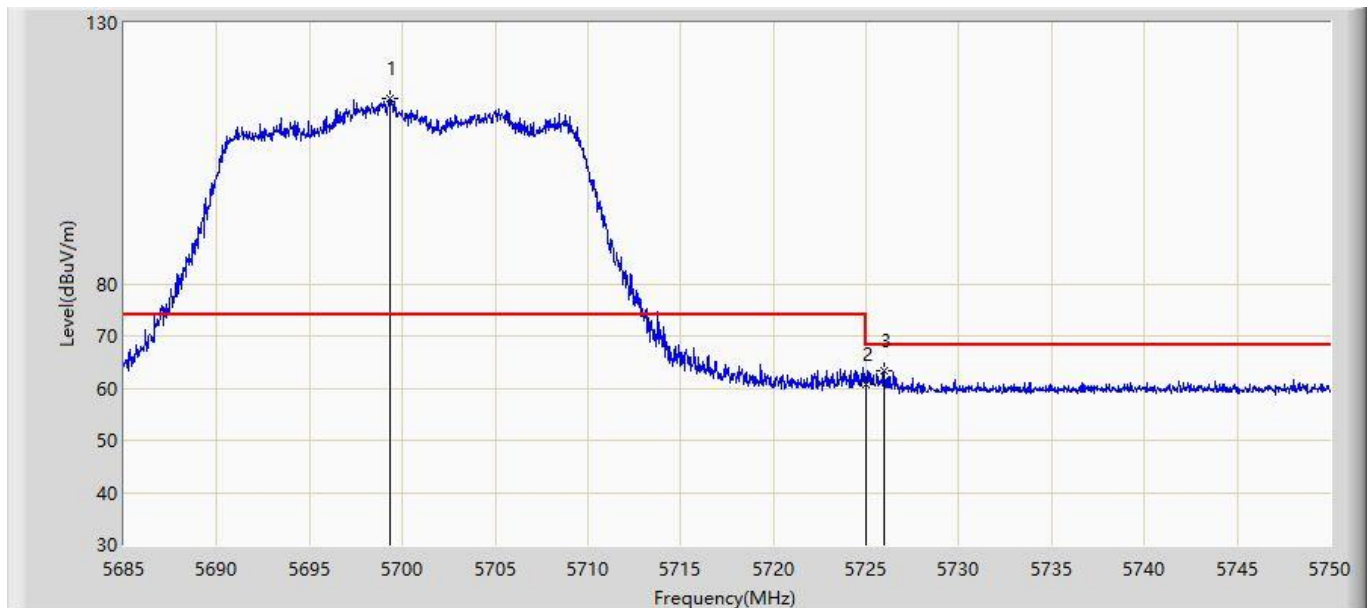


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5699.300	115.461	110.826	N/A	N/A	4.635	PK
2			5725.000	60.800	56.066	-7.400	68.200	4.734	PK
3			5725.982	63.368	58.630	-4.832	68.200	4.738	PK

Test Mode: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/03/16 - 19:41
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE20 at Channel 5700MHz with OAW-AP1361 (CDD Mode)	

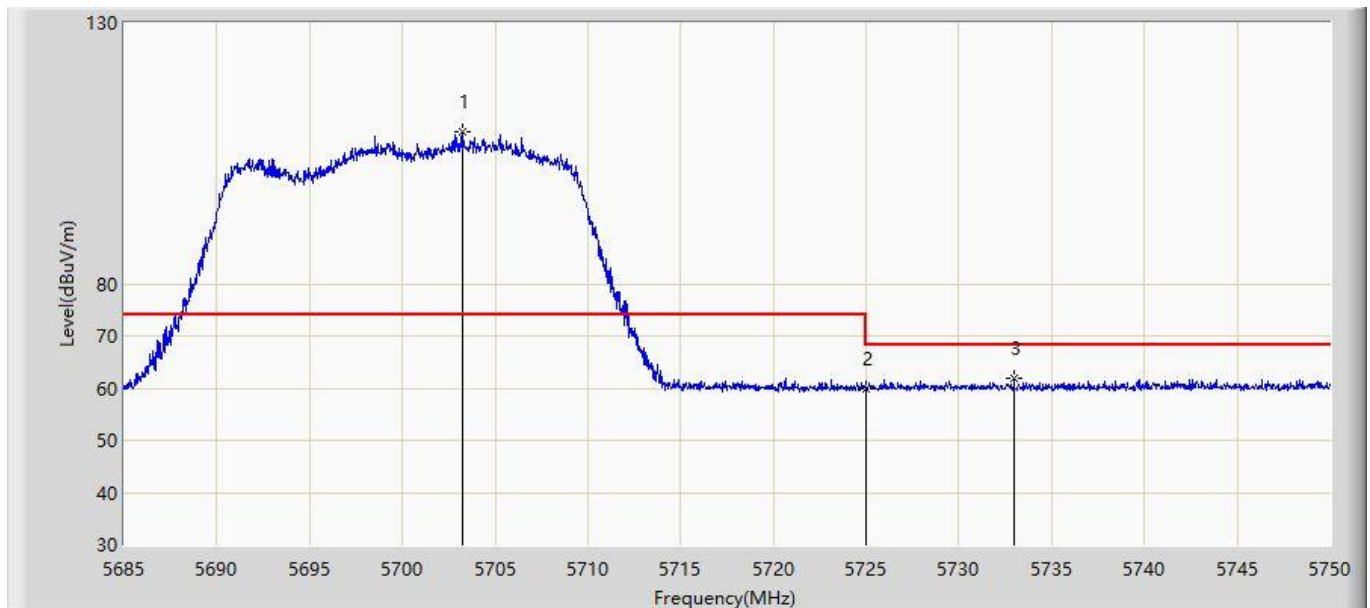


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5703.265	109.158	104.507	N/A	N/A	4.651	PK
2			5725.000	59.981	55.247	-8.219	68.200	4.734	PK
3			5732.970	61.752	56.988	-6.448	68.200	4.764	PK

Test Mode: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/03/16 - 19:47
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE20 at Channel 5745MHz with OAW-AP1361 (CDD Mode)	

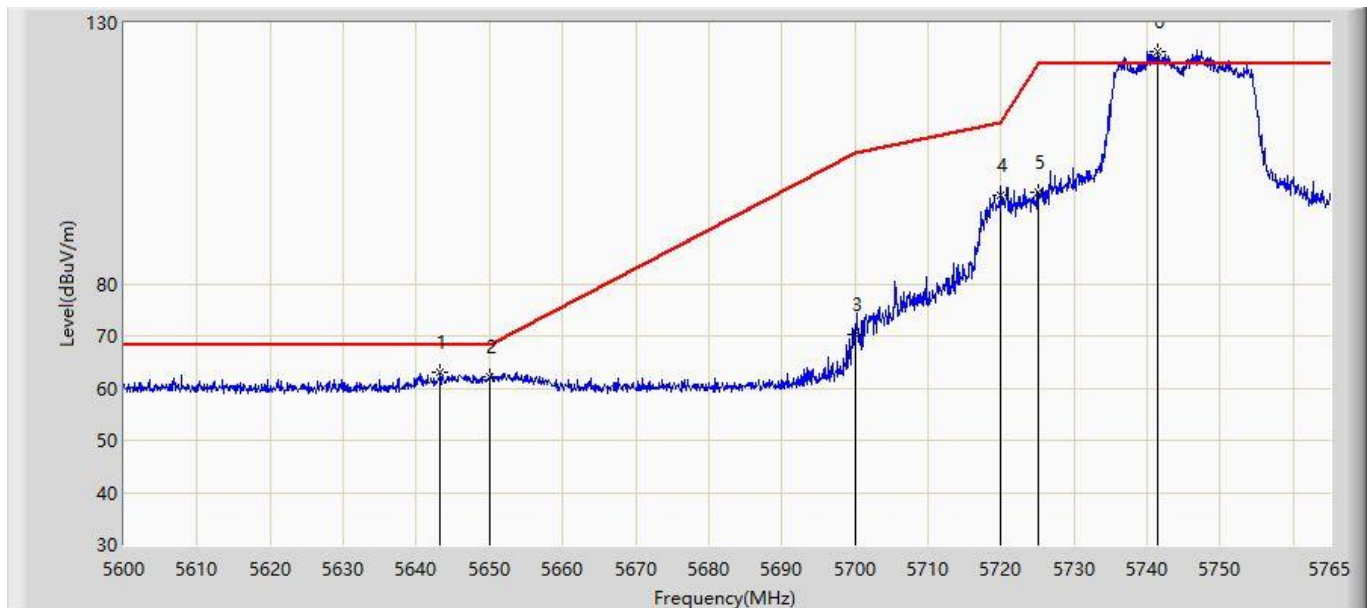


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5643.312	62.983	58.562	-5.217	68.200	4.421	PK
2			5650.000	62.227	57.781	-5.973	68.200	4.446	PK
3			5700.000	70.210	65.572	-34.990	105.200	4.638	PK
4			5720.000	96.836	92.121	-13.964	110.800	4.715	PK
5			5725.000	97.485	92.751	-24.715	122.200	4.734	PK
6		*	5741.405	124.410	119.613	N/A	N/A	4.796	PK

Test Mode: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/03/16 - 19:48
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE20 at Channel 5745MHz with OAW-AP1361 (CDD Mode)	

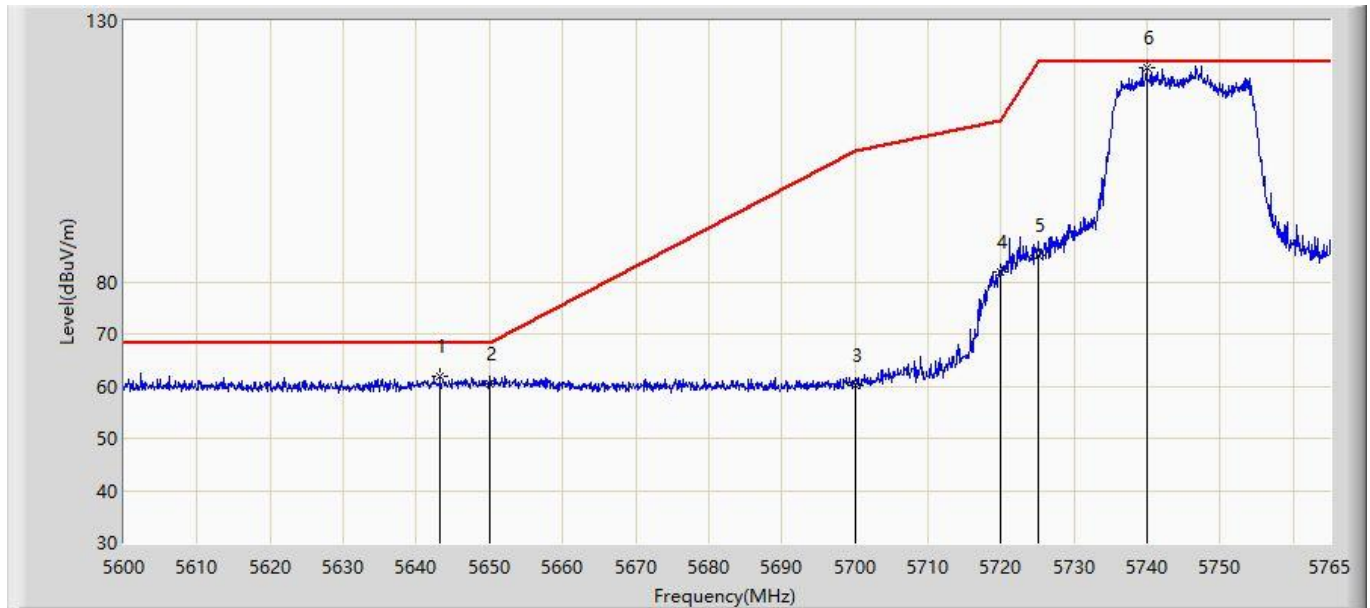


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5643.312	61.910	57.489	-6.290	68.200	4.421	PK
2			5650.000	60.314	55.868	-7.886	68.200	4.446	PK
3			5700.000	60.286	55.648	-44.914	105.200	4.638	PK
4			5720.000	81.811	77.096	-28.989	110.800	4.715	PK
5			5725.000	84.977	80.243	-37.223	122.200	4.734	PK
6		*	5739.920	120.953	116.162	N/A	N/A	4.791	PK

Test Mode: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/03/16 - 19:49
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE20 at Channel 5825MHz with OAW-AP1361 (CDD Mode)	

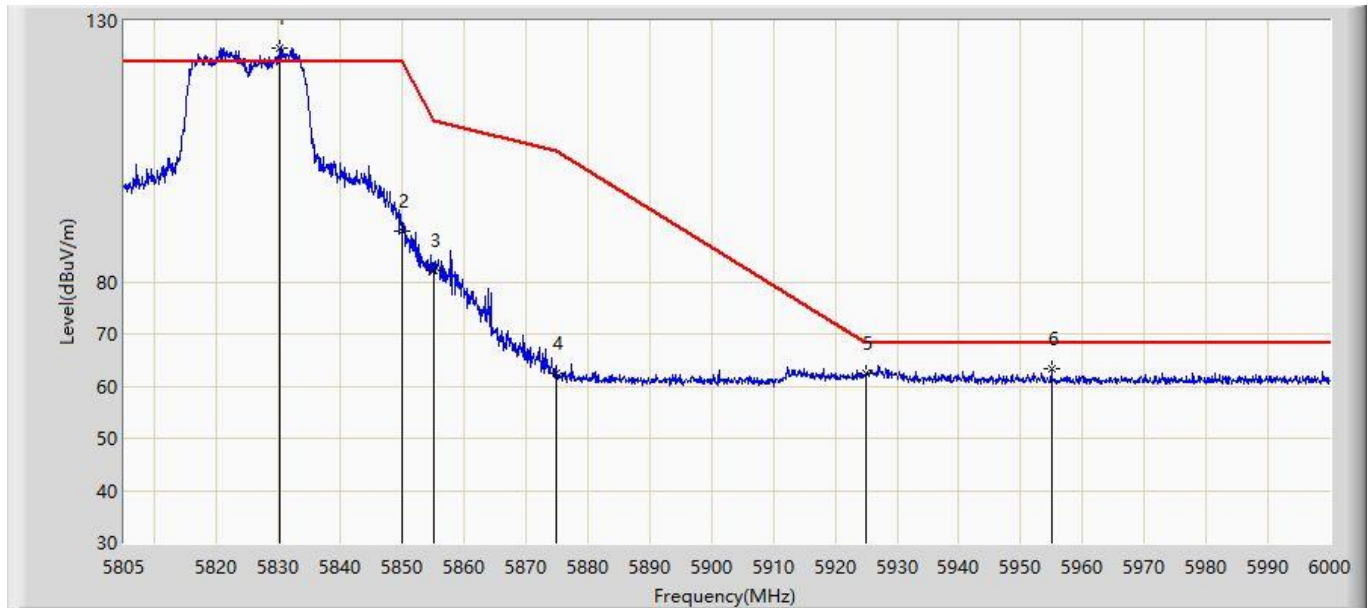


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5830.058	124.717	119.579	N/A	N/A	5.137	PK
2			5850.000	89.804	84.590	-32.396	122.200	5.214	PK
3			5855.000	82.297	77.064	-28.503	110.800	5.233	PK
4			5875.000	62.463	57.153	-42.737	105.200	5.310	PK
5			5925.000	62.394	56.892	-5.806	68.200	5.502	PK
6			5954.955	63.263	57.646	-4.937	68.200	5.617	PK

Test Mode: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/03/16 - 19:51
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE20 at Channel 5825MHz with OAW-AP1361 (CDD Mode)	

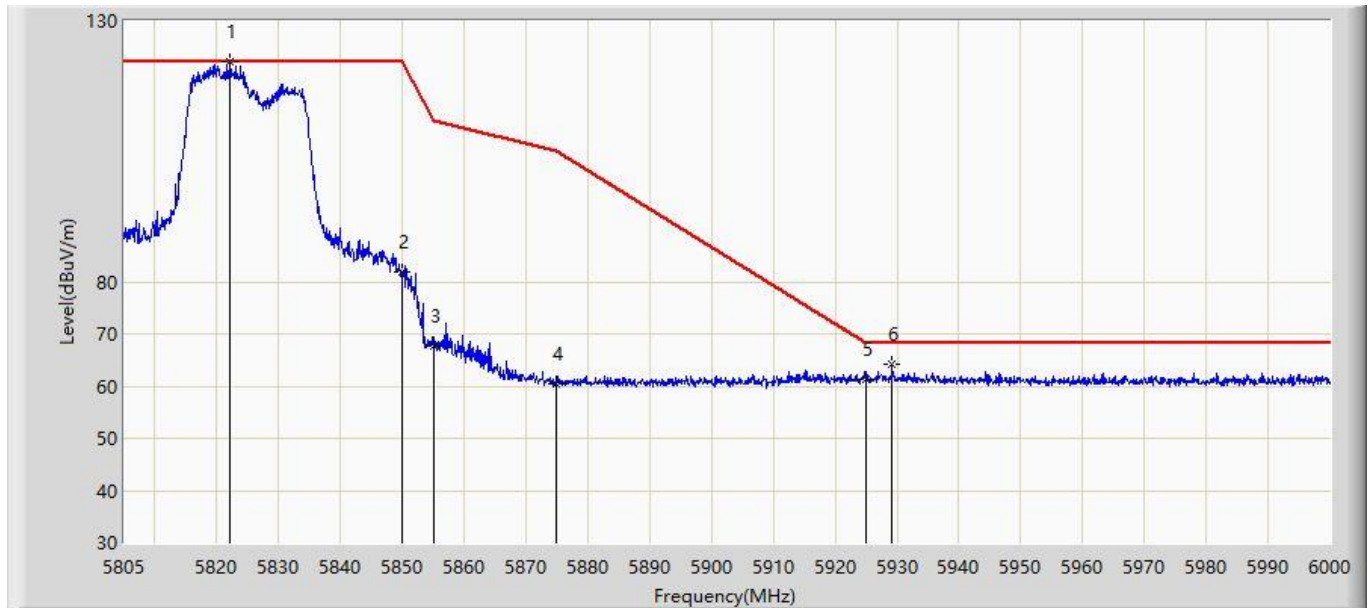


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5822.160	122.208	117.101	N/A	N/A	5.108	PK
2			5850.000	81.869	76.655	-40.331	122.200	5.214	PK
3			5855.000	67.694	62.461	-43.106	110.800	5.233	PK
4			5875.000	60.516	55.206	-44.684	105.200	5.310	PK
5			5925.000	61.179	55.677	-7.021	68.200	5.502	PK
6			5929.118	64.065	58.547	-4.135	68.200	5.517	PK

Test Mode: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/03/16 - 19:58
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE40 at Channel 5190MHz with OAW-AP1361 (CDD Mode)	

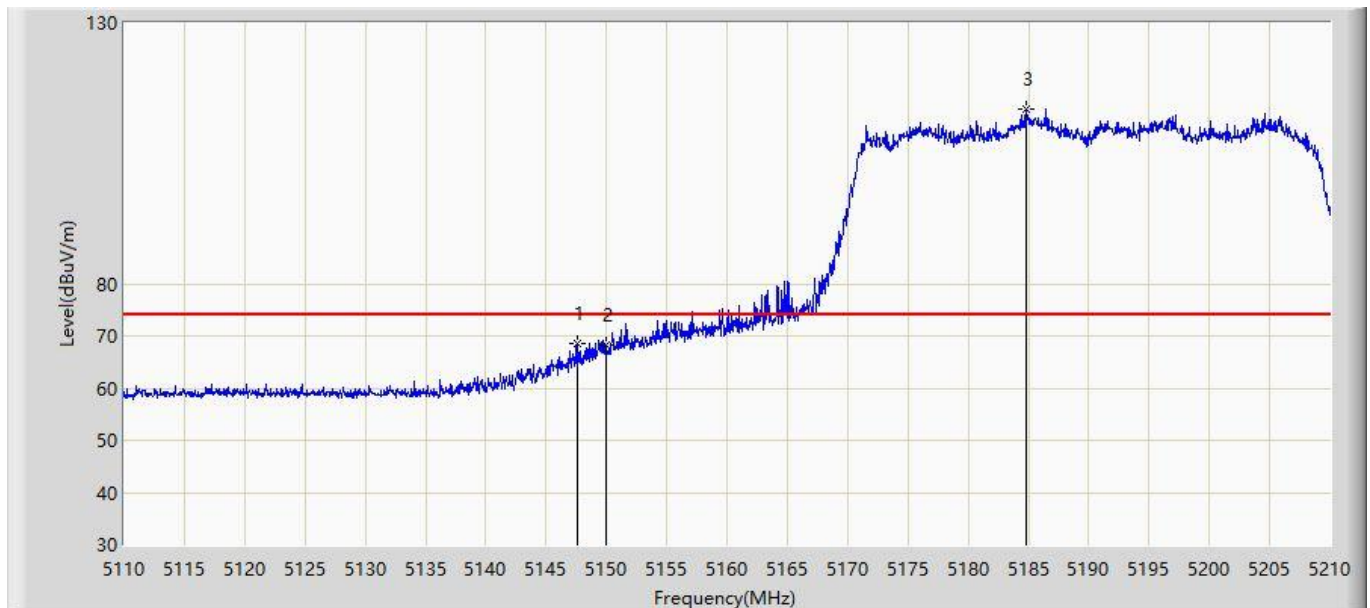


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5147.550	68.657	65.012	-5.343	74.000	3.645	PK
2			5150.000	68.241	64.595	-5.759	74.000	3.646	PK
3		*	5184.800	113.469	109.801	N/A	N/A	3.669	PK

Test Mode: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/03/16 - 19:57
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE40 at Channel 5190MHz with OAW-AP1361 (CDD Mode)	

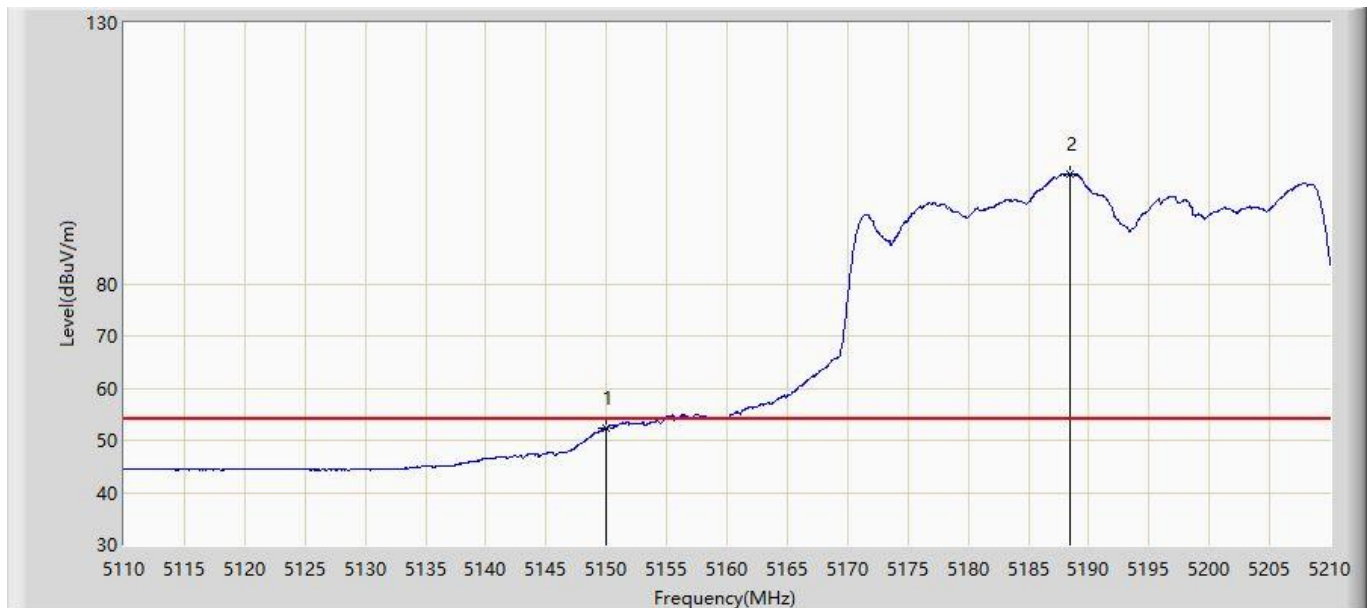


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	52.437	48.791	-1.563	54.000	3.646	AV
2		*	5188.500	101.118	97.447	N/A	N/A	3.671	AV

Test Mode: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/03/16 - 20:01
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE40 at Channel 5190MHz with OAW-AP1361 (CDD Mode)	

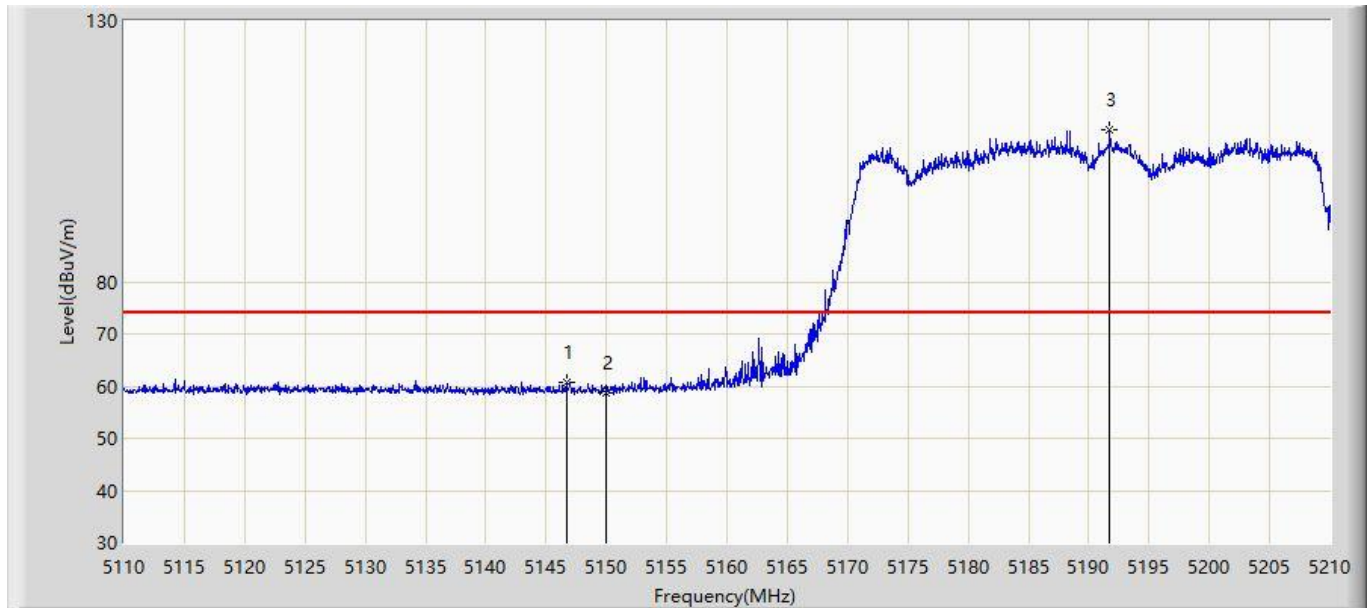


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5146.700	60.817	57.173	-13.183	74.000	3.644	PK
2			5150.000	58.808	55.162	-15.192	74.000	3.646	PK
3		*	5191.750	109.122	105.449	N/A	N/A	3.673	PK

Test Mode: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/03/16 - 20:04
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE40 at Channel 5190MHz with OAW-AP1361 (CDD Mode)	

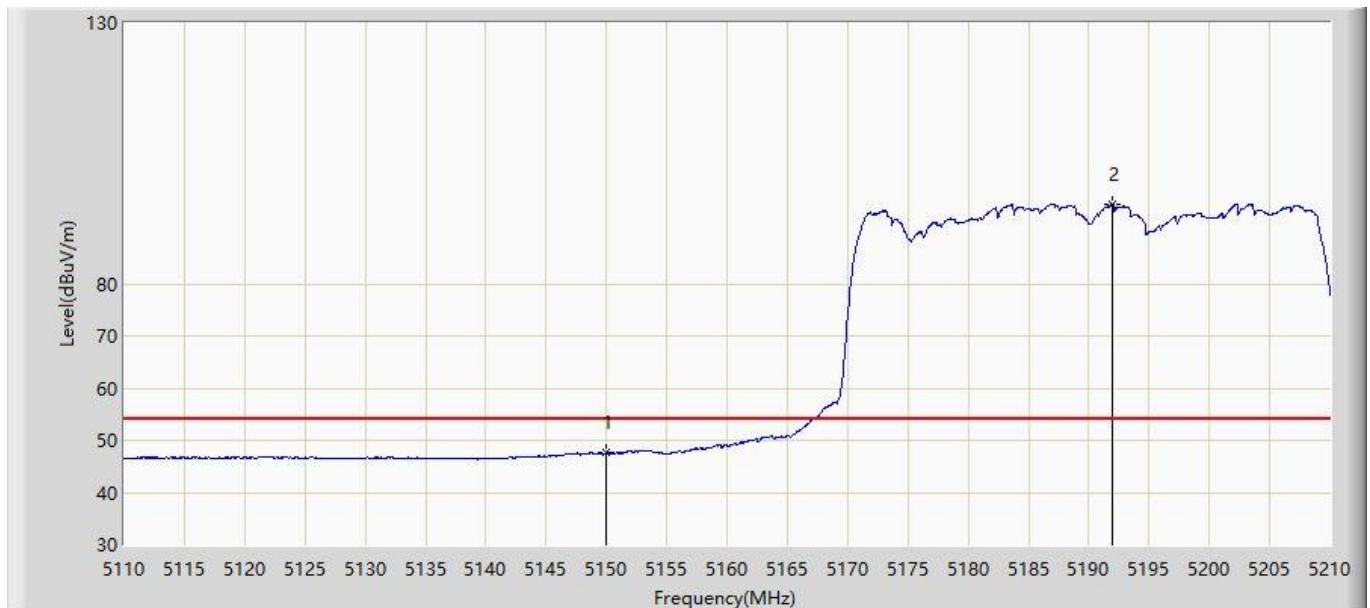


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	47.563	43.917	-6.437	54.000	3.646	AV
2		*	5191.900	95.218	91.545	N/A	N/A	3.673	AV

Test Mode: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/03/16 - 20:07
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE40 at Channel 5310MHz with OAW-AP1361 (CDD Mode)	

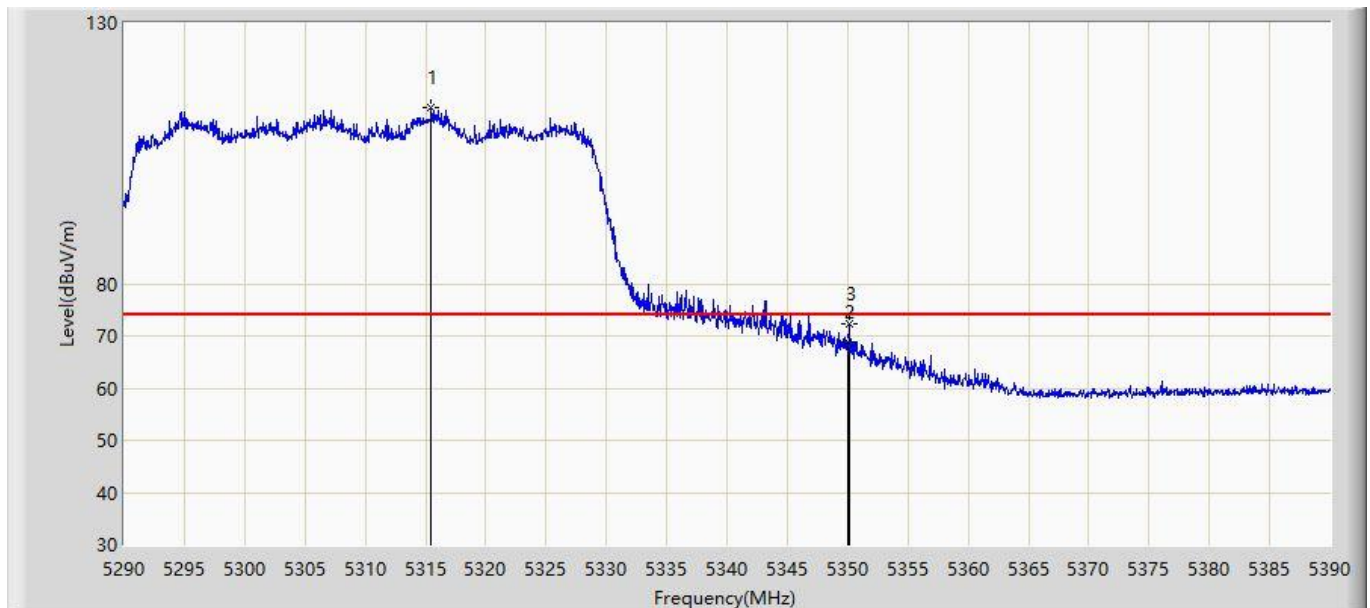


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5315.450	113.797	110.045	N/A	N/A	3.753	PK
2			5350.000	68.792	65.018	-5.208	74.000	3.774	PK
3			5350.200	72.355	68.581	-1.645	74.000	3.773	PK

Test Mode: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/03/16 - 20:09
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE40 at Channel 5310MHz with OAW-AP1361 (CDD Mode)	

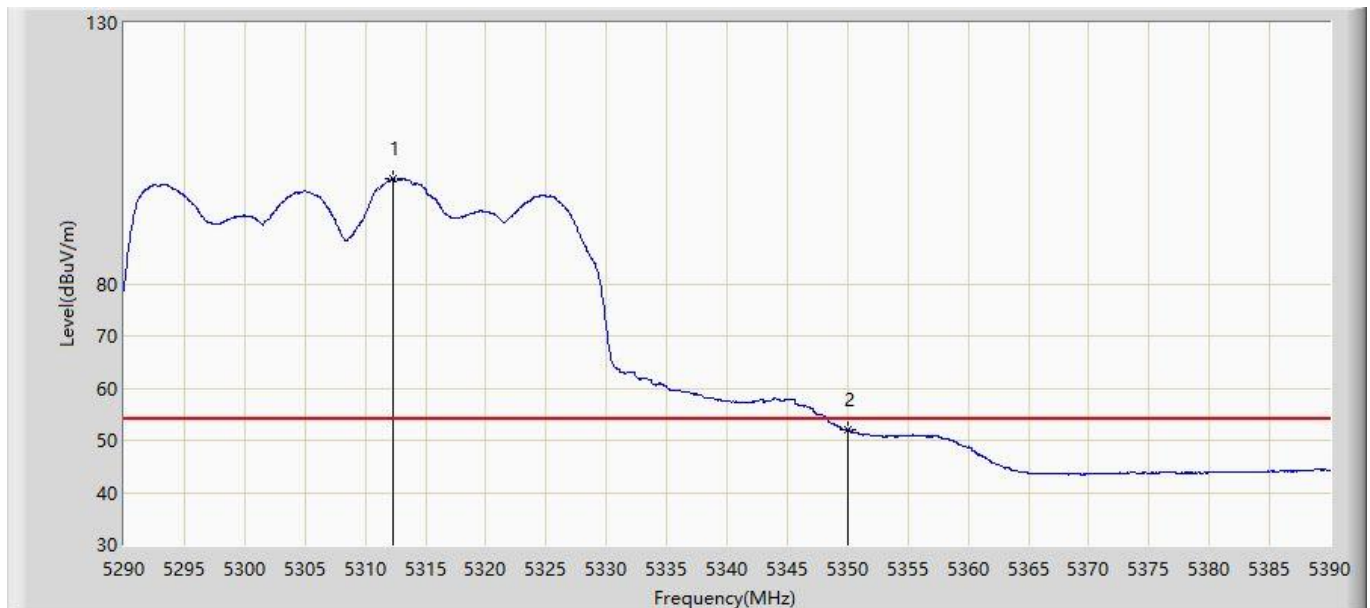


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5312.350	100.141	96.391	N/A	N/A	3.750	AV
2			5350.000	51.929	48.155	-2.071	54.000	3.774	AV

Test Mode: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/03/16 - 20:11
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE40 at Channel 5310MHz with OAW-AP1361 (CDD Mode)	

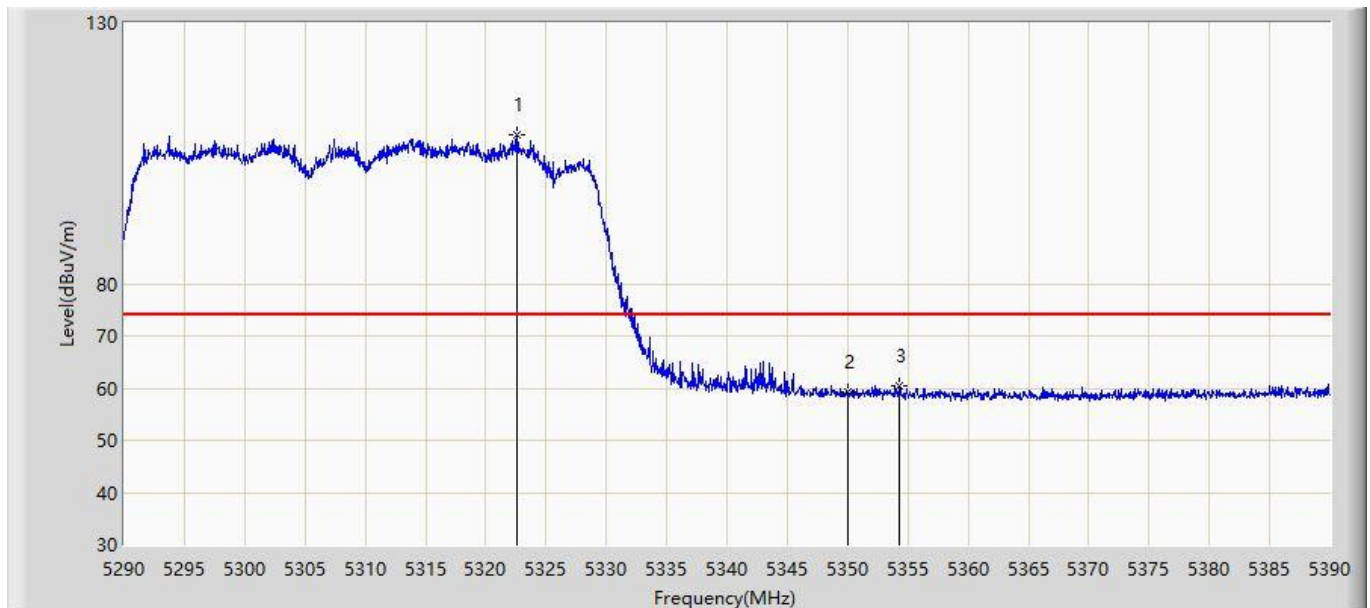


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5322.600	108.635	104.878	N/A	N/A	3.757	PK
2			5350.000	59.327	55.553	-14.673	74.000	3.774	PK
3			5354.250	60.301	56.525	-13.699	74.000	3.776	PK

Test Mode: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/03/16 - 20:11
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE40 at Channel 5310MHz with OAW-AP1361 (CDD Mode)	

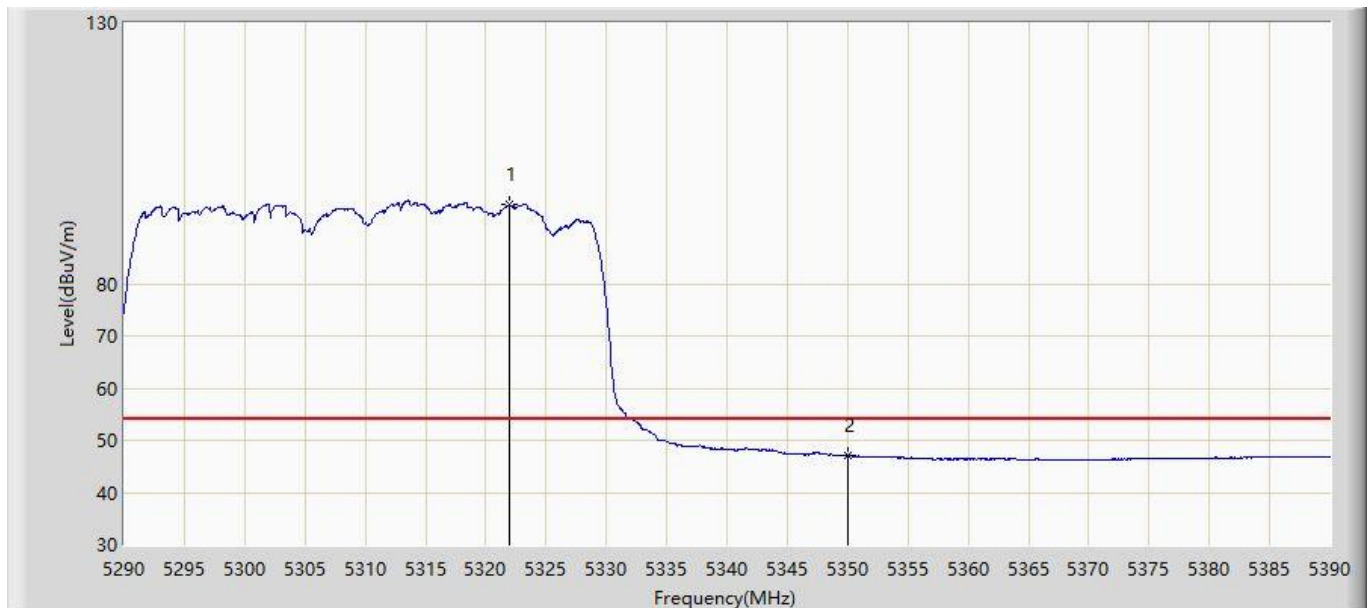


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5321.950	95.120	91.363	N/A	N/A	3.757	AV
2			5350.000	46.971	43.197	-7.029	54.000	3.774	AV

Test Mode: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/03/16 - 20:16
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE40 at Channel 5510MHz with OAW-AP1361 (CDD Mode)	

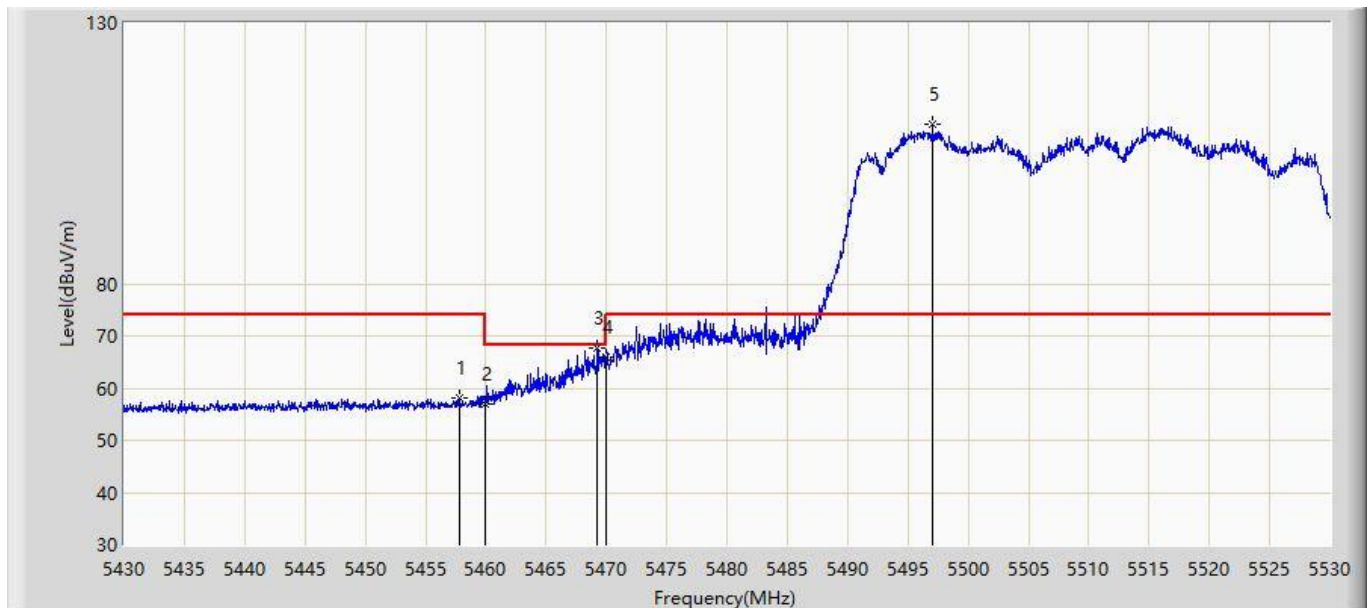


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5457.850	58.246	54.403	-15.754	74.000	3.842	PK
2			5460.000	57.063	53.219	-16.937	74.000	3.844	PK
3			5469.250	67.692	63.842	-0.508	68.200	3.850	PK
4			5470.000	65.945	62.094	-2.255	68.200	3.850	PK
5		*	5497.050	110.488	106.611	N/A	N/A	3.877	PK

Test Mode: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/03/16 - 20:17
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE40 at Channel 5510MHz with OAW-AP1361 (CDD Mode)	

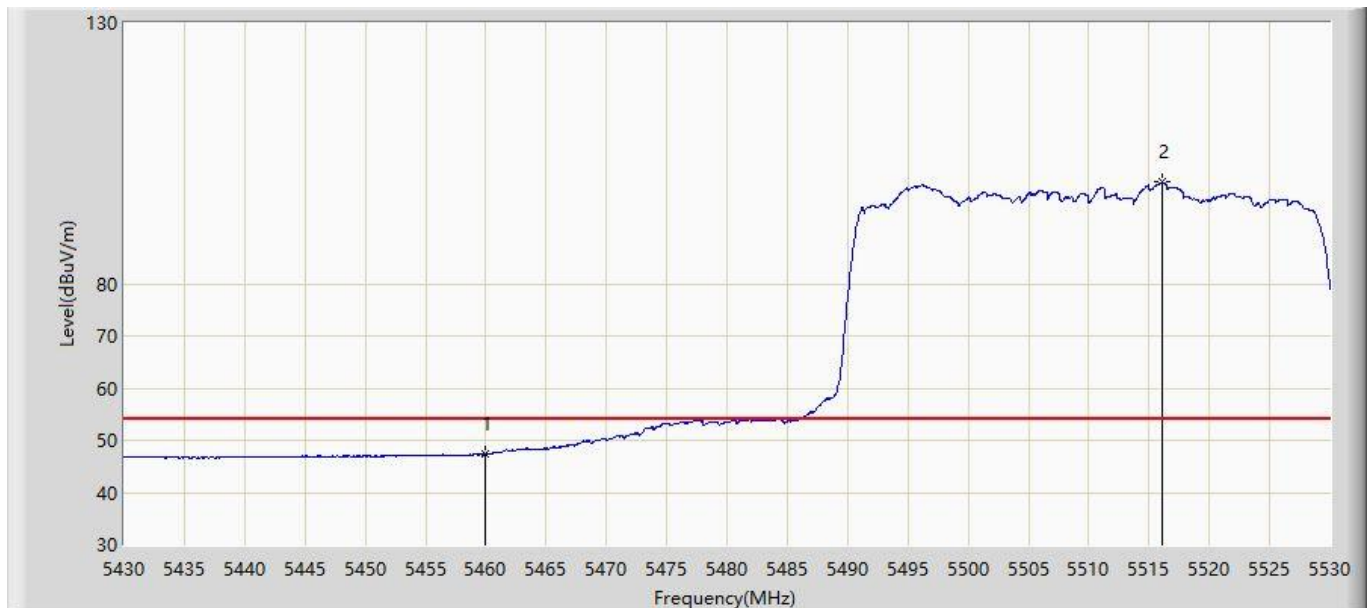


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	47.423	43.579	-6.577	54.000	3.844	AV
2		*	5516.100	99.421	95.489	N/A	N/A	3.932	AV

Test Mode: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/03/16 - 20:18
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE40 at Channel 5510MHz with OAW-AP1361 (CDD Mode)	

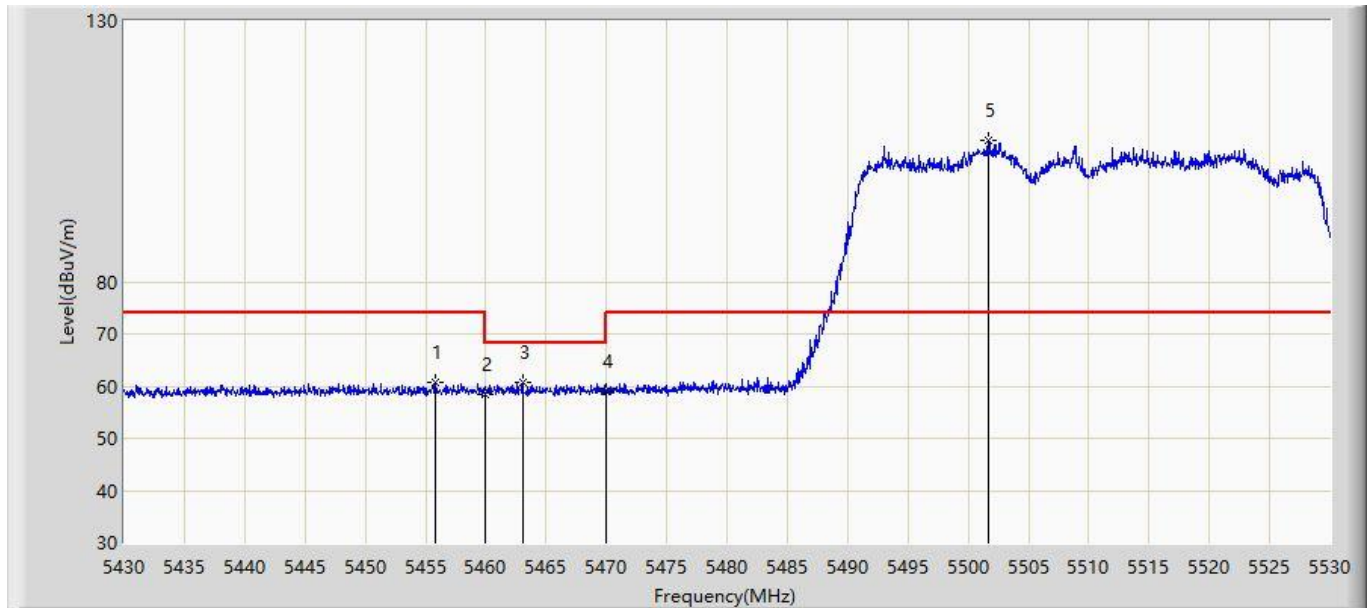


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5455.800	60.773	56.932	-13.227	74.000	3.841	PK
2			5460.000	58.528	54.684	-15.472	74.000	3.844	PK
3			5463.050	60.623	56.777	-7.577	68.200	3.847	PK
4			5470.000	58.930	55.079	-9.270	68.200	3.850	PK
5		*	5501.700	106.974	103.090	N/A	N/A	3.884	PK

Test Mode: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/03/16 - 20:19
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE40 at Channel 5510MHz with OAW-AP1361 (CDD Mode)	

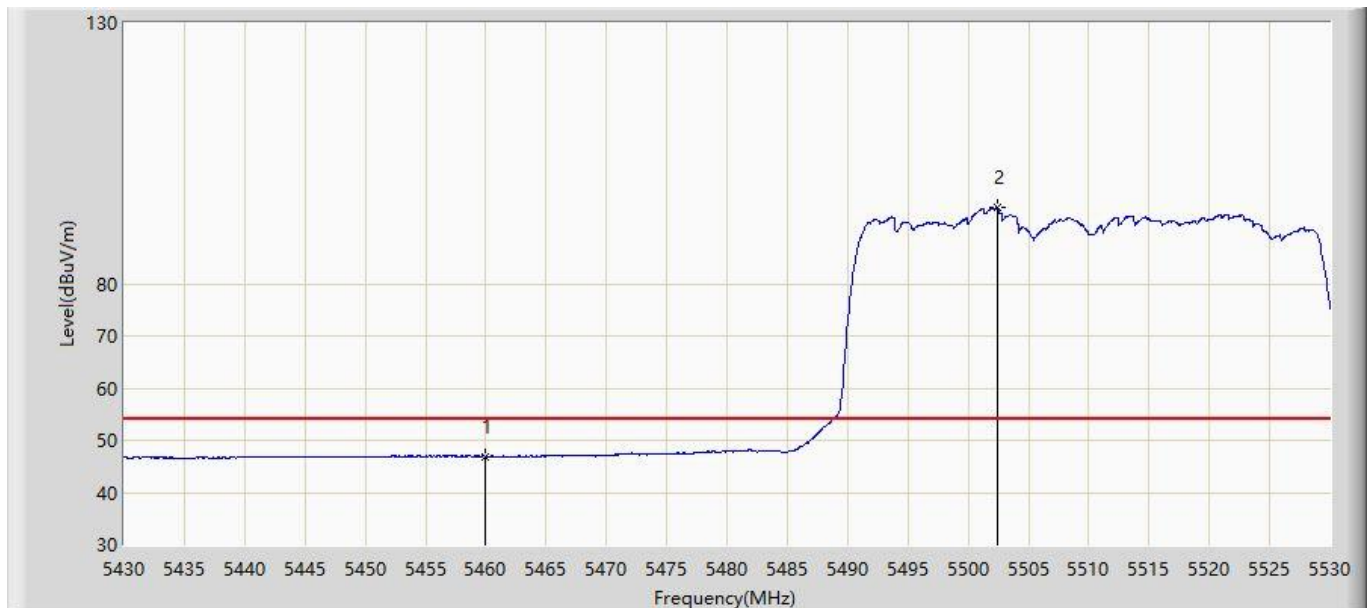


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	46.883	43.039	-7.117	54.000	3.844	AV
2		*	5502.400	94.547	90.662	N/A	N/A	3.885	AV

Test Mode: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/03/16 - 20:21
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE40 at Channel 5670MHz with OAW-AP1361 (CDD Mode)	

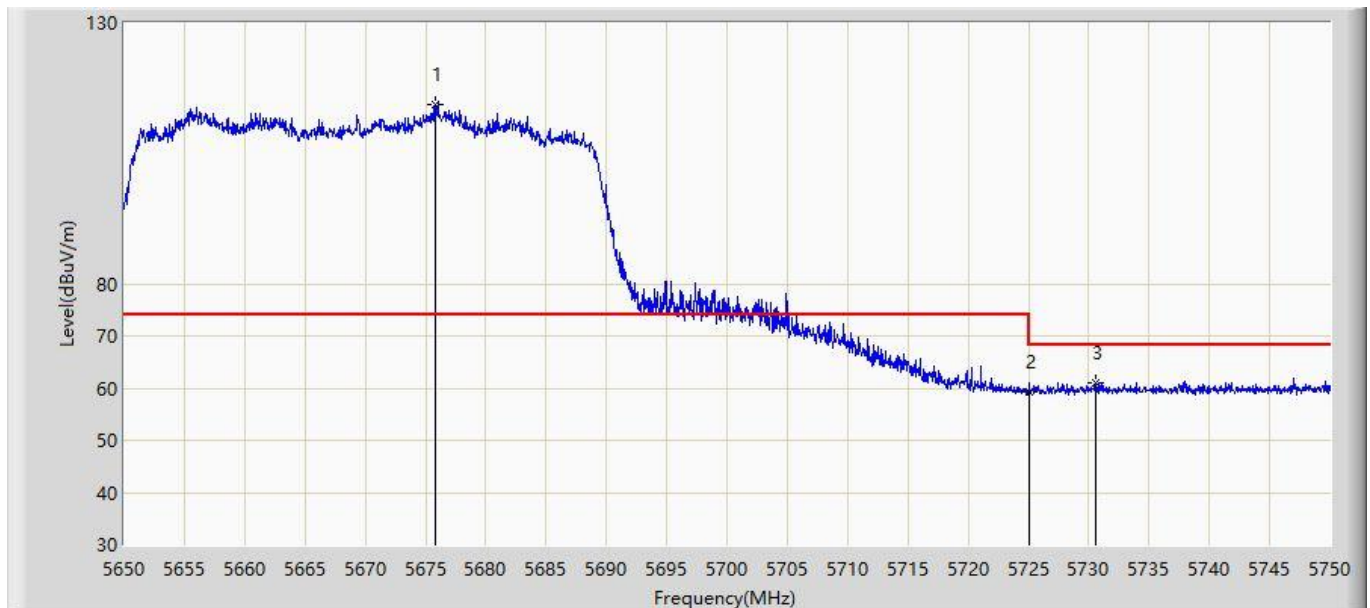


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5675.800	114.471	109.926	N/A	N/A	4.545	PK
2			5725.000	59.214	54.480	-8.986	68.200	4.734	PK
3			5730.600	60.914	56.159	-7.286	68.200	4.755	PK

Test Mode: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/03/16 - 20:22
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE40 at Channel 5670MHz with OAW-AP1361 (CDD Mode)	

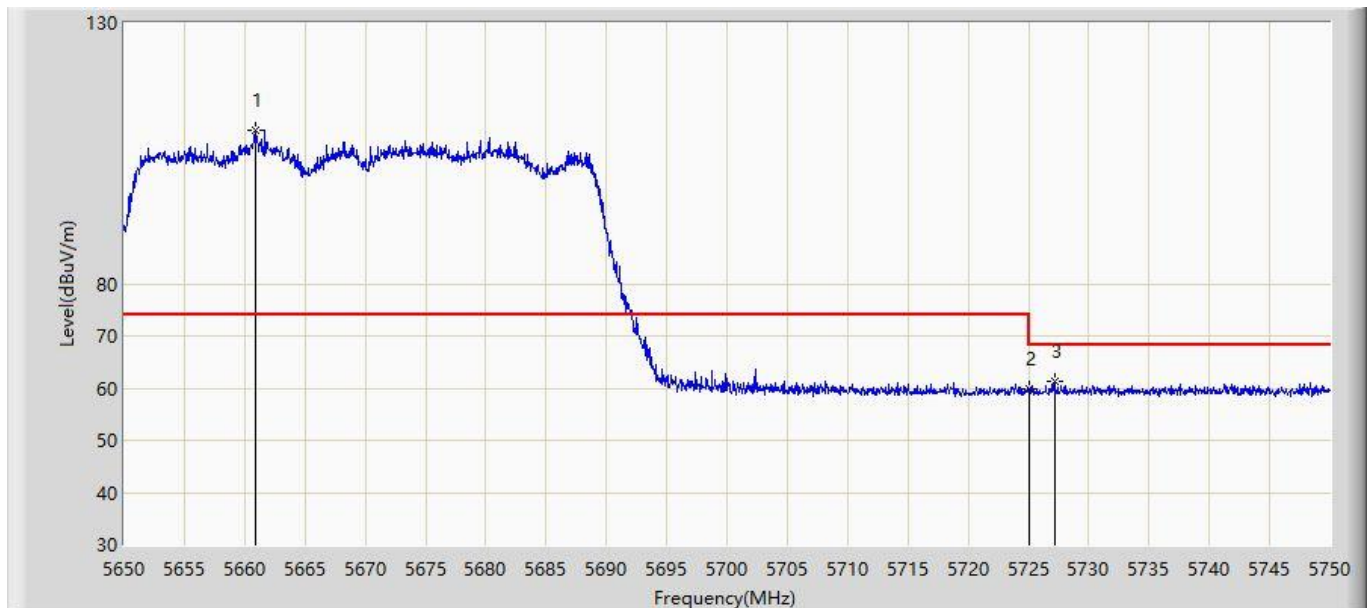


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5660.950	109.381	104.893	N/A	N/A	4.487	PK
2			5725.000	59.846	55.112	-8.354	68.200	4.734	PK
3			5727.150	61.275	56.533	-6.925	68.200	4.742	PK

Test Mode: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/03/16 - 20:23
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE40 at Channel 5755MHz with OAW-AP1361 (CDD Mode)	

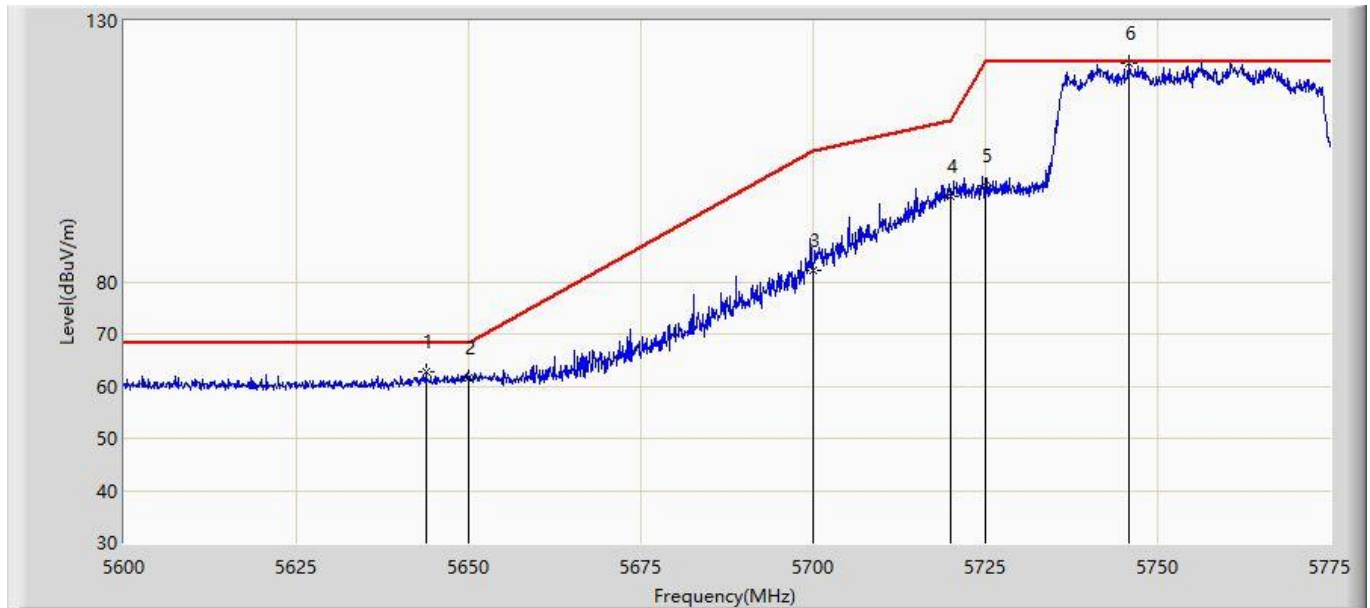


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5643.837	62.846	58.423	-5.354	68.200	4.423	PK
2			5650.000	61.575	57.129	-6.625	68.200	4.446	PK
3			5700.000	82.210	77.572	-22.990	105.200	4.638	PK
4			5720.000	96.464	91.749	-14.336	110.800	4.715	PK
5			5725.000	98.384	93.650	-23.816	122.200	4.734	PK
6		*	5745.862	121.775	116.961	N/A	N/A	4.813	PK

Test Mode: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/03/16 - 20:24
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE40 at Channel 5755MHz with OAW-AP1361 (CDD Mode)	

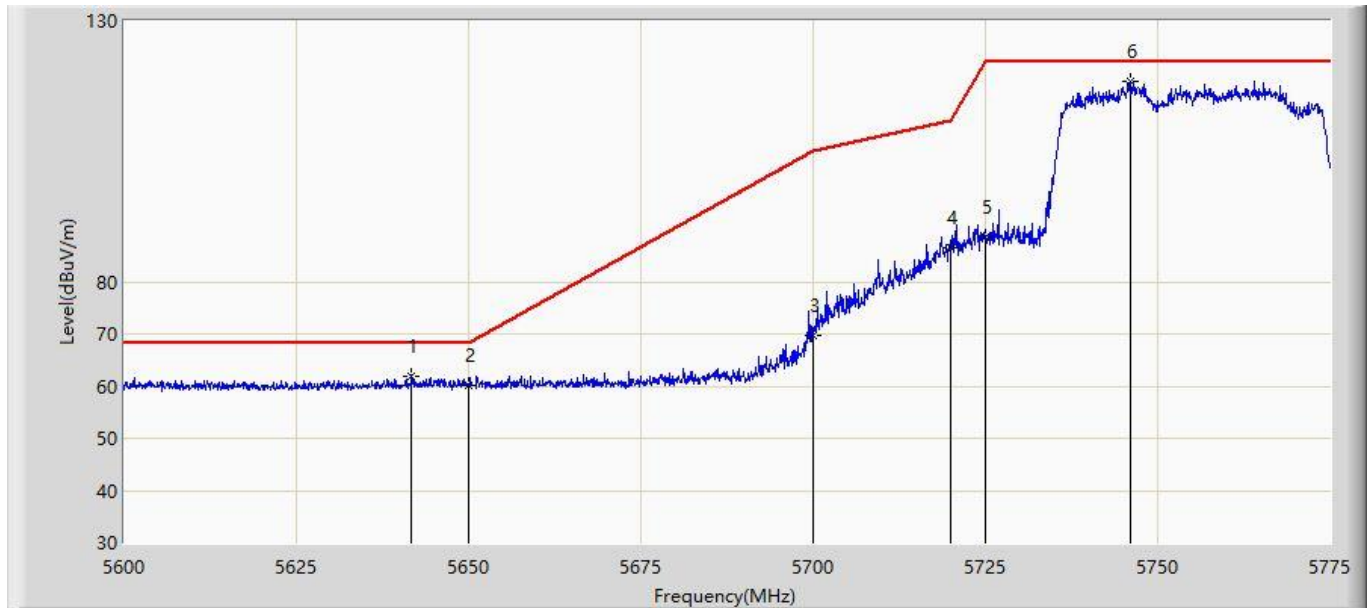


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5641.737	62.028	57.613	-6.172	68.200	4.414	PK
2			5650.000	60.261	55.815	-7.939	68.200	4.446	PK
3			5700.000	69.599	64.961	-35.601	105.200	4.638	PK
4			5720.000	86.438	81.723	-24.362	110.800	4.715	PK
5			5725.000	88.535	83.801	-33.665	122.200	4.734	PK
6		*	5746.038	118.434	113.620	N/A	N/A	4.815	PK

Test Mode: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/03/16 - 20:26
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE40 at Channel 5795MHz with OAW-AP1361 (CDD Mode)	

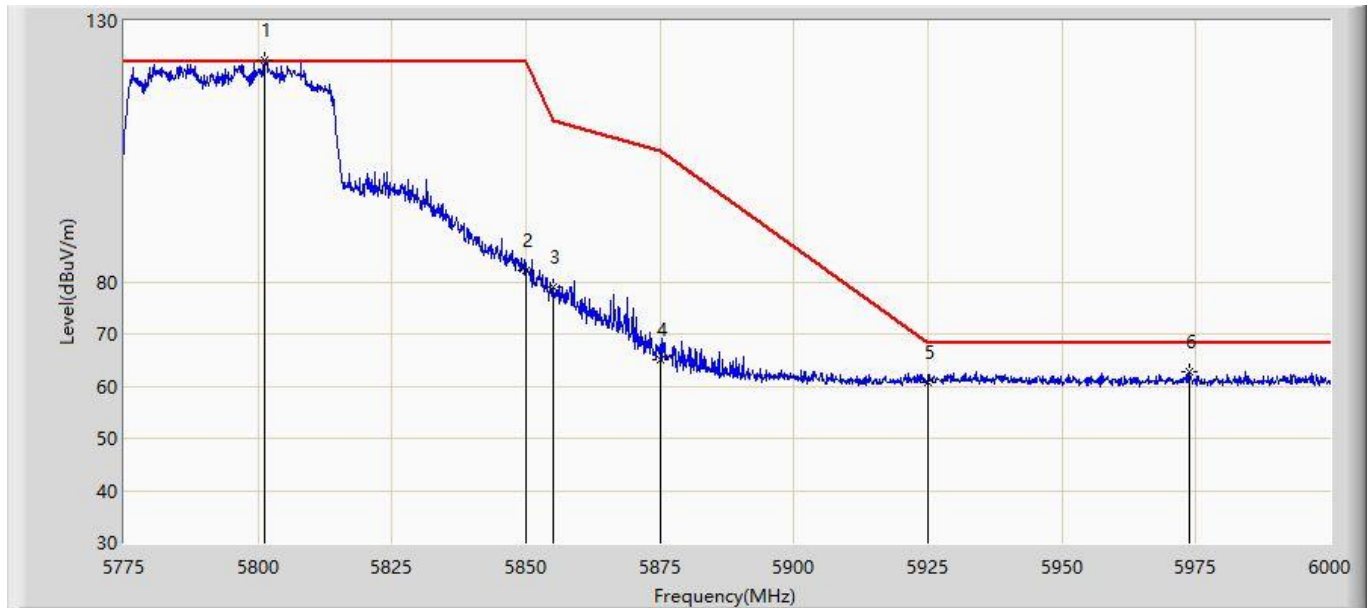


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5801.212	122.444	117.417	N/A	N/A	5.026	PK
2			5850.000	82.277	77.063	-39.923	122.200	5.214	PK
3			5855.000	79.028	73.795	-31.772	110.800	5.233	PK
4			5875.000	65.215	59.905	-39.985	105.200	5.310	PK
5			5925.000	60.866	55.364	-7.334	68.200	5.502	PK
6			5973.900	62.649	56.959	-5.551	68.200	5.690	PK

Test Mode: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/03/16 - 20:27
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE40 at Channel 5795MHz with OAW-AP1361 (CDD Mode)	

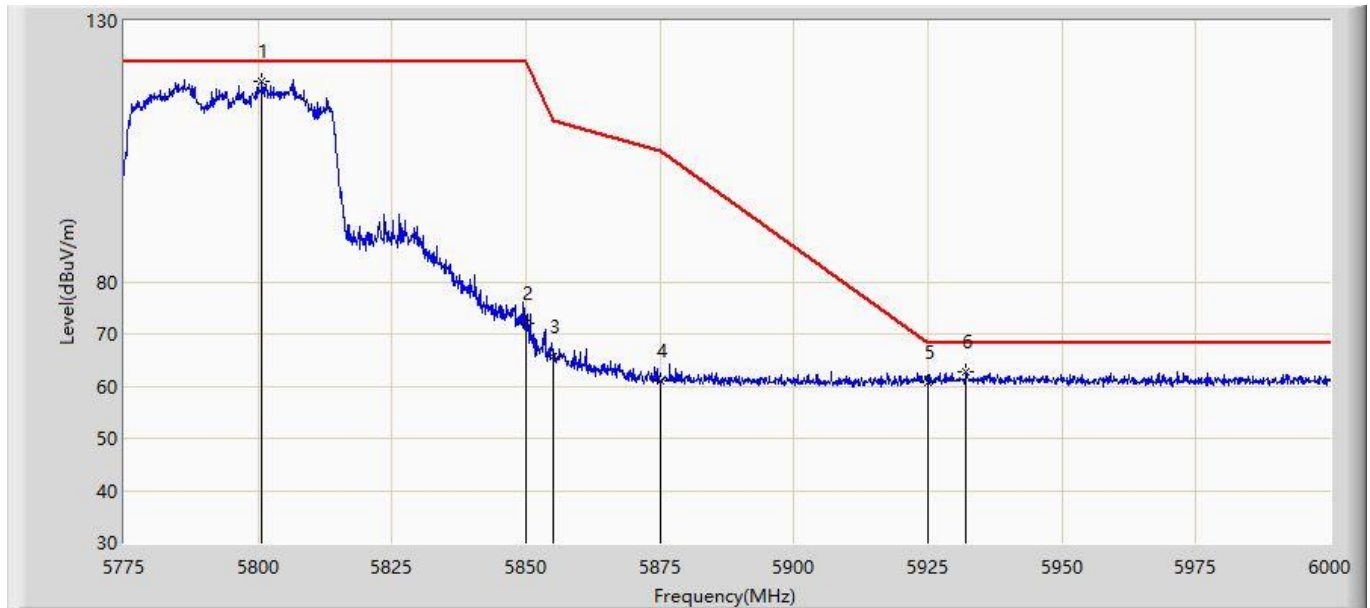

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5800.763	118.360	113.335	N/A	N/A	5.025	PK
2			5850.000	71.927	66.713	-50.273	122.200	5.214	PK
3			5855.000	65.644	60.411	-45.156	110.800	5.233	PK
4			5875.000	61.126	55.816	-44.074	105.200	5.310	PK
5			5925.000	60.701	55.199	-7.499	68.200	5.502	PK
6			5932.163	62.891	57.361	-5.309	68.200	5.530	PK

Test Mode: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).