

APPENDIX A

Graph Results (E-UTRA)

Test Mode: E-UTRA Band 1

Test Laboratory: Audix SAR Lab

Date: 04/07/2026

CH18042(1924.2MHz Right)

DUT: LTE USB WIFI Stick Type: Wai-Link

Communication System: UID 0, Generic LTE (0); Communication System Band:

Band 1, E-UTRA/FDD (1920.0 - 1980.0 MHz); Frequency: 1924.2

MHz; Communication System PAR: 0 dB

Medium parameters used (extrapolated): $f = 1924.2$ MHz; $\sigma = 1.494$ S/m; $\epsilon_r = 39.532$;
 $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7957; ConvF(7.47, 7.64, 7.92) @ 1924.2 MHz;
Calibrated: 2025/10/6
- Modulation Compensation:
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn899; Calibrated: 2026/6/25
- Phantom: Twin-SAM V4.0 (20deg probe tilt); Type: QD 000 P40 CC; Serial:
xxxx
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14
(7501)

Configuration/CH18042(1924.2MHz Right)/Area Scan (61x81x1):

Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.362 W/kg

Configuration/CH18042(1924.2MHz Right)/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 14.11 V/m; Power Drift = 0.11 dB


Peak SAR (extrapolated) = 0.557 W/kg

SAR(1 g) = 0.305 W/kg; SAR(10 g) = 0.158 W/kg

Smallest distance from peaks to all points 3 dB below = 12.8 mm

Ratio of SAR at M2 to SAR at M1 = 56.7%

Maximum value of SAR (measured) = 0.330 W/kg

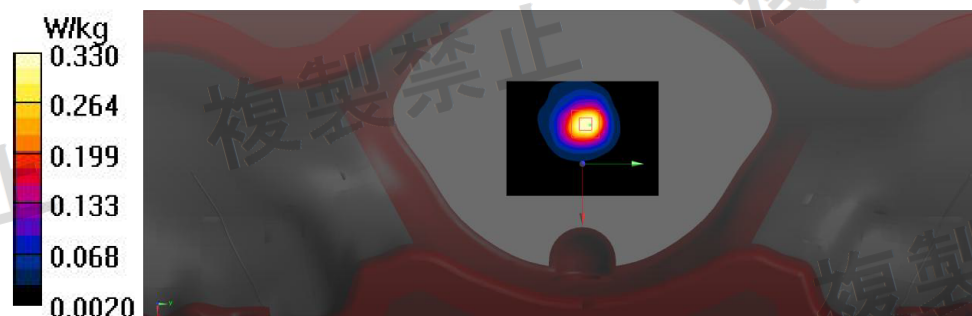

Test Laboratory: Audix SAR Lab

Date: 04/07/2026

CH18309(1950.9MHz Right)

DUT: LTE USB WIFI Stick Type: Wai-Link

Communication System: UID 0, Generic LTE (0); Communication System Band:

Band 1, E-UTRA/FDD (1920.0 - 1980.0 MHz); Frequency: 1950.9

MHz; Communication System PAR: 0 dB

Medium parameters used (extrapolated): $f = 1950.9$ MHz; $\sigma = 1.521$ S/m; $\epsilon_r = 39.407$;

$\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7957; ConvF(7.47, 7.64, 7.92) @ 1950.9 MHz; Calibrated: 2025/10/6
- Modulation Compensation:
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn899; Calibrated: 2026/6/25
- Phantom: Twin-SAM V4.0 (20deg probe tilt); Type: QD 000 P40 CC; Serial: xxxx
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Configuration/CH18309(1950.9MHz Right)/Area Scan (61x81x1):

Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.376 W/kg

Configuration/CH18309(1950.9MHz Right)/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 13.86 V/m; Power Drift = 0.17 dB


Peak SAR (extrapolated) = 0.568 W/kg

SAR(1 g) = 0.314 W/kg; SAR(10 g) = 0.162 W/kg

Smallest distance from peaks to all points 3 dB below = 11.3 mm

Ratio of SAR at M2 to SAR at M1 = 56.2%

Maximum value of SAR (measured) = 0.348 W/kg

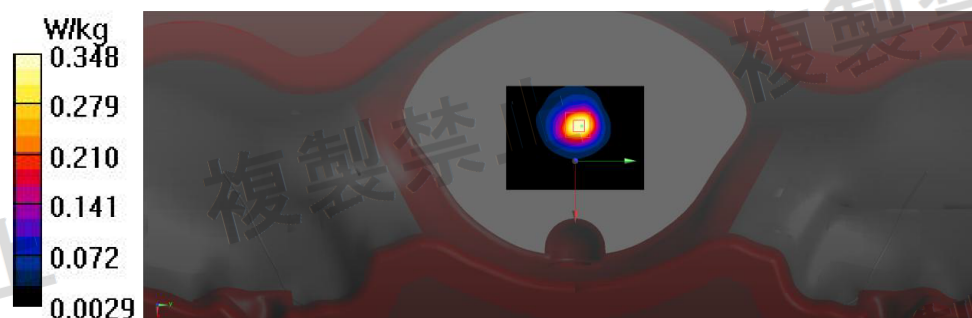

Test Laboratory: Audix SAR Lab

Date: 04/07/2026

CH18575(1977.5MHz Back)

DUT: LTE USB WIFI Stick Type: Wai-Link

Communication System: UID 0, Generic LTE (0); Communication System Band:

Band 1, E-UTRA/FDD (1920.0 - 1980.0 MHz); Frequency: 1977.5

MHz; Communication System PAR: 0 dB

Medium parameters used: $f = 1909.8$ MHz; $\sigma = 1.48$ S/m; $\epsilon_r = 39.6$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7957; ConvF(7.47, 7.64, 7.92) @ 1977.5 MHz; Calibrated: 2025/10/6
- Modulation Compensation:
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn899; Calibrated: 2026/6/25
- Phantom: Twin-SAM V4.0 (20deg probe tilt); Type: QD 000 P40 CC; Serial: xxxx
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Configuration/CH18575(1977.5MHz Back)/Area Scan (61x81x1):

Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 0.0275 W/kg

Configuration/CH18575(1977.5MHz Back)/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 2.194 V/m; Power Drift = 0.13 dB


Peak SAR (extrapolated) = 0.0390 W/kg

SAR(1 g) = 0.012 W/kg; SAR(10 g) = 0.00581 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid (> 16 mm)

Ratio of SAR at M2 to SAR at M1 = 47.6%

Maximum value of SAR (measured) = 0.0192 W/kg

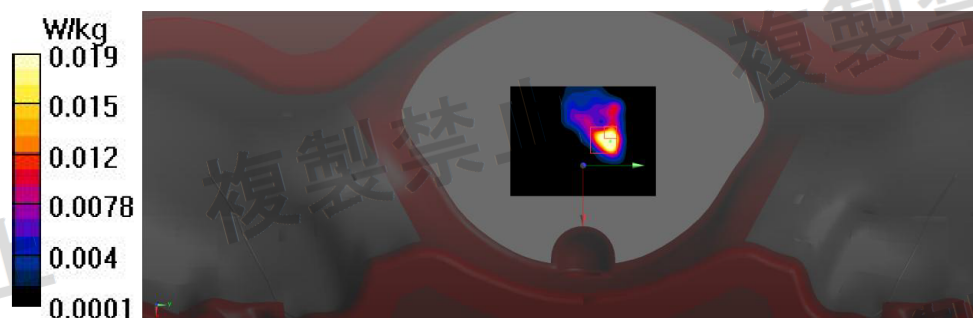

Test Laboratory: Audix SAR Lab

Date: 04/07/2026

CH18575(1977.5MHz Bottom)

DUT: LTE USB WIFI Stick Type: Wai-Link

Communication System: UID 0, Generic LTE (0); Communication System Band:

Band 1, E-UTRA/FDD (1920.0 - 1980.0 MHz); Frequency: 1977.5

MHz; Communication System PAR: 0 dB

Medium parameters used: $f = 1909.8$ MHz; $\sigma = 1.48$ S/m; $\epsilon_r = 39.6$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7957; ConvF(7.47, 7.64, 7.92) @ 1977.5 MHz; Calibrated: 2025/10/6
- Modulation Compensation:
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn899; Calibrated: 2026/6/25
- Phantom: Twin-SAM V4.0 (20deg probe tilt); Type: QD 000 P40 CC; Serial: xxxx
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Configuration/CH18575(1977.5MHz Bottom)/Area Scan (61x81x1):

Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 0.0174 W/kg

Configuration/CH18575(1977.5MHz Bottom)/Zoom Scan (5x5x7)/Cube

0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 1.495 V/m; Power Drift = 0.15 dB


Peak SAR (extrapolated) = 0.0200 W/kg

SAR(1 g) = 0.00963 W/kg; SAR(10 g) = 0.00485 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid (> 16 mm)

Ratio of SAR at M2 to SAR at M1 = 49.3%

Maximum value of SAR (measured) = 0.0150 W/kg

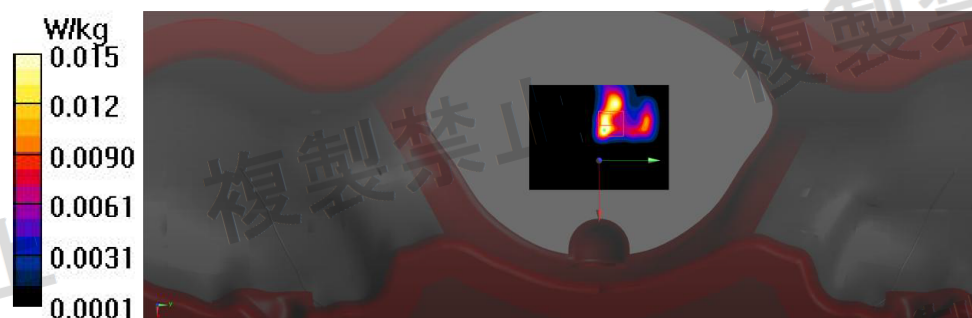

Test Laboratory: Audix SAR Lab

Date: 04/07/2026

CH18575(1977.5MHz Front)

DUT: LTE USB WIFI Stick Type: Wai-Link

Communication System: UID 0, Generic LTE (0); Communication System Band:

Band 1, E-UTRA/FDD (1920.0 - 1980.0 MHz); Frequency: 1977.5

MHz; Communication System PAR: 0 dB

Medium parameters used: $f = 1909.8$ MHz; $\sigma = 1.48$ S/m; $\epsilon_r = 39.6$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7957; ConvF(7.47, 7.64, 7.92) @ 1977.5 MHz; Calibrated: 2025/10/6
- Modulation Compensation:
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn899; Calibrated: 2026/6/25
- Phantom: Twin-SAM V4.0 (20deg probe tilt); Type: QD 000 P40 CC; Serial: xxxx
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Configuration/CH18575(1977.5MHz Front)/Area Scan (61x81x1):

Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 0.0949 W/kg

Configuration/CH18575(1977.5MHz Front)/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 4.600 V/m; Power Drift = 0.19 dB


Peak SAR (extrapolated) = 0.143 W/kg

SAR(1 g) = 0.044 W/kg; SAR(10 g) = 0.024 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid (> 16 mm)

Ratio of SAR at M2 to SAR at M1 = 41%

Maximum value of SAR (measured) = 0.0680 W/kg

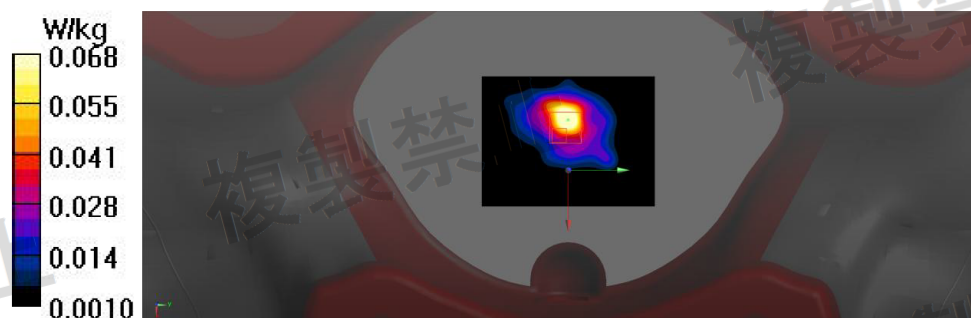

Test Laboratory: Audix SAR Lab

Date: 04/07/2026

CH18575(1977.5MHz Left)

DUT: LTE USB WIFI Stick Type: Wai-Link

Communication System: UID 0, Generic LTE (0); Communication System Band:

Band 1, E-UTRA/FDD (1920.0 - 1980.0 MHz); Frequency: 1977.5

MHz; Communication System PAR: 0 dB

Medium parameters used: $f = 1909.8$ MHz; $\sigma = 1.48$ S/m; $\epsilon_r = 39.6$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7957; ConvF(7.47, 7.64, 7.92) @ 1977.5 MHz; Calibrated: 2025/10/6
- Modulation Compensation:
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn899; Calibrated: 2026/6/25
- Phantom: Twin-SAM V4.0 (20deg probe tilt); Type: QD 000 P40 CC; Serial: xxxx
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Configuration/CH18575(1977.5MHz Left)/Area Scan (61x81x1):

Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 0.0221 W/kg

Configuration/CH18575(1977.5MHz Left)/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 2.424 V/m; Power Drift = 0.10 dB


Peak SAR (extrapolated) = 0.0640 W/kg

SAR(1 g) = 0.016 W/kg; SAR(10 g) = 0.00607 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid (> 16 mm)

Ratio of SAR at M2 to SAR at M1 = 41.1%

Maximum value of SAR (measured) = 0.0216 W/kg

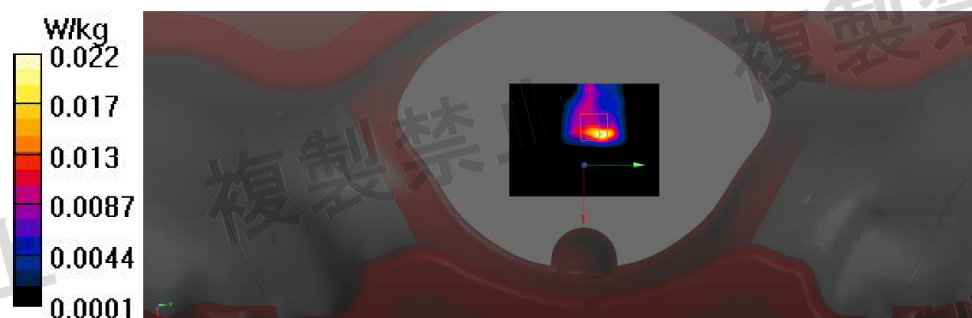

Test Laboratory: Audix SAR Lab

Date: 04/07/2026

CH18575(1977.5MHz Right)

DUT: LTE USB WIFI Stick Type: Wai-Link

Communication System: UID 0, Generic LTE (0); Communication System Band:

Band 1, E-UTRA/FDD (1920.0 - 1980.0 MHz); Frequency: 1977.5

MHz; Communication System PAR: 0 dB

Medium parameters used: $f = 1909.8$ MHz; $\sigma = 1.48$ S/m; $\epsilon_r = 39.6$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7957; ConvF(7.47, 7.64, 7.92) @ 1977.5 MHz; Calibrated: 2025/10/6
- Modulation Compensation:
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn899; Calibrated: 2026/6/25
- Phantom: Twin-SAM V4.0 (20deg probe tilt); Type: QD 000 P40 CC; Serial: xxxx
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Configuration/CH18575(1977.5MHz Right)/Area Scan (61x81x1):

Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.358 W/kg

Configuration/CH18575(1977.5MHz Right)/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 14.10 V/m; Power Drift = -0.06 dB


Peak SAR (extrapolated) = 0.545 W/kg

SAR(1 g) = 0.305 W/kg; SAR(10 g) = 0.158 W/kg

Smallest distance from peaks to all points 3 dB below = 11.5 mm

Ratio of SAR at M2 to SAR at M1 = 56.3%

Maximum value of SAR (measured) = 0.343 W/kg

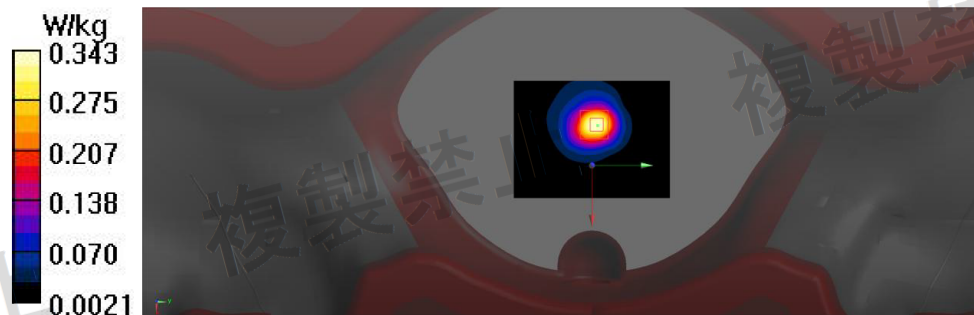

Test Laboratory: Audix SAR Lab

Date: 04/07/2026

CH18575(1977.5MHz Top)

DUT: LTE USB WIFI Stick Type: Wai-Link

Communication System: UID 0, Generic LTE (0); Communication System Band:

Band 1, E-UTRA/FDD (1920.0 - 1980.0 MHz); Frequency: 1977.5

MHz; Communication System PAR: 0 dB

Medium parameters used: $f = 1909.8$ MHz; $\sigma = 1.48$ S/m; $\epsilon_r = 39.6$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7957; ConvF(7.47, 7.64, 7.92) @ 1977.5 MHz; Calibrated: 2025/10/6
- Modulation Compensation:
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn899; Calibrated: 2026/6/25
- Phantom: Twin-SAM V4.0 (20deg probe tilt); Type: QD 000 P40 CC; Serial: xxxx
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Configuration/CH18575(1977.5MHz Top)/Area Scan (61x81x1):

Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.0321 W/kg

Configuration/CH18575(1977.5MHz Top)/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.291 V/m; Power Drift = 0.01 dB


Peak SAR (extrapolated) = 0.0490 W/kg

SAR(1 g) = 0.029 W/kg; SAR(10 g) = 0.018 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid (> 16 mm)

Ratio of SAR at M2 to SAR at M1 = 57.2%

Maximum value of SAR (measured) = 0.0319 W/kg

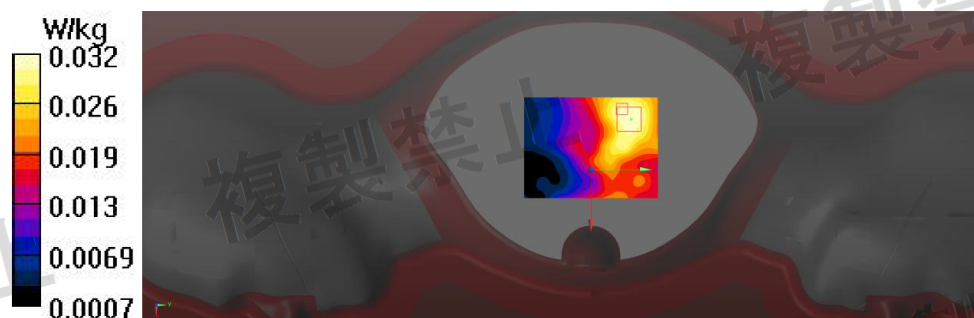

Test Mode: E-UTRA Band 3

Test Laboratory: Audix SAR Lab
CH19925(1782.5MHz Back)

Date: 03/07/2026

DUT: LTE USB WIFI Stick Type: Wai-Link

Communication System: UID 0, Generic LTE (0); Communication System Band:

Band 3, E-UTRA/FDD (1710.0 - 1785.0 MHz); Frequency: 1782.5

MHz; Communication System PAR: 0 dB

Medium parameters used (interpolated): $f = 1782.5$ MHz; $\sigma = 1.413$ S/m; $\epsilon_r = 39.851$;
 $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7957; ConvF(7.68, 7.86, 8.15) @ 1782.5 MHz;
 Calibrated: 2025/10/6
- Modulation Compensation:
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn899; Calibrated: 2026/6/25
- Phantom: Twin-SAM V4.0 (20deg probe tilt); Type: QD 000 P40 CC; Serial:
 xxxx
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14
 (7501)

Configuration/CH19925(1782.5MHz Back)/Area Scan (61x81x1):

Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 0.0622 W/kg

Configuration/CH19925(1782.5MHz Back)/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 2.651 V/m; Power Drift = 0.07 dB


Peak SAR (extrapolated) = 0.0790 W/kg

SAR(1 g) = 0.023 W/kg; SAR(10 g) = 0.00974 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid
 (> 16 mm)

Ratio of SAR at M2 to SAR at M1 = 49.2%

Maximum value of SAR (measured) = 0.0343 W/kg

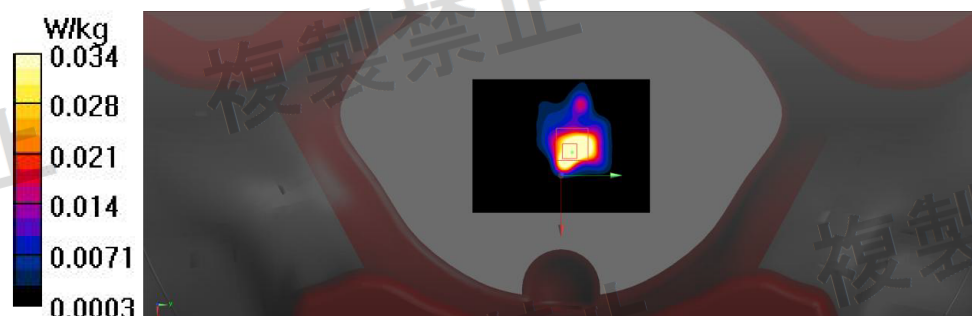

Test Laboratory: Audix SAR Lab

Date: 03/07/2026

CH19925(1782.5MHz Bottom)

DUT: LTE USB WIFI Stick Type: Wai-Link

Communication System: UID 0, Generic LTE (0); Communication System Band:

Band 3, E-UTRA/FDD (1710.0 - 1785.0 MHz); Frequency: 1782.5

MHz; Communication System PAR: 0 dB

Medium parameters used (interpolated): $f = 1782.5$ MHz; $\sigma = 1.413$ S/m; $\epsilon_r = 39.851$;

$\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7957; ConvF(7.68, 7.86, 8.15) @ 1782.5 MHz; Calibrated: 2025/10/6
- Modulation Compensation:
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn899; Calibrated: 2026/6/25
- Phantom: Twin-SAM V4.0 (20deg probe tilt); Type: QD 000 P40 CC; Serial: xxxx
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Configuration/CH19925(1782.5MHz Bottom)/Area Scan (61x81x1):

Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 0.0219 W/kg

Configuration/CH19925(1782.5MHz Bottom)/Zoom Scan (5x5x7)/Cube

0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 2.631 V/m; Power Drift = 0.14 dB


Peak SAR (extrapolated) = 0.0160 W/kg

SAR(1 g) = 0.011 W/kg; SAR(10 g) = 0.006 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid (> 16 mm)

Ratio of SAR at M2 to SAR at M1 = 44.9%

Maximum value of SAR (measured) = 0.0134 W/kg

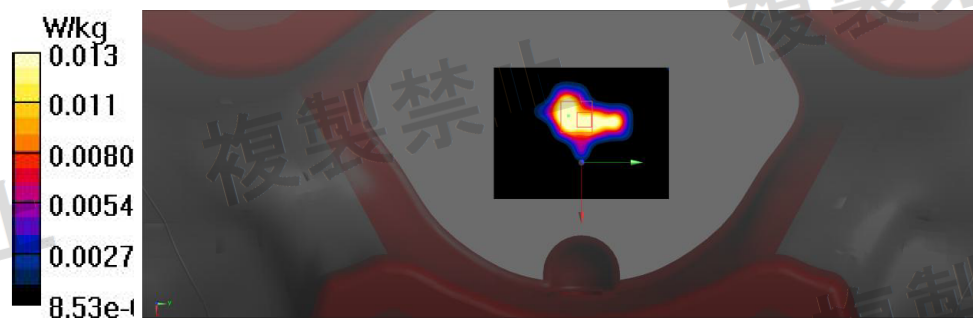

Test Laboratory: Audix SAR Lab

Date: 03/07/2026

CH19925(1782.5MHz Front)

DUT: LTE USB WIFI Stick Type: Wai-Link

Communication System: UID 0, Generic LTE (0); Communication System Band:

Band 3, E-UTRA/FDD (1710.0 - 1785.0 MHz); Frequency: 1782.5

MHz; Communication System PAR: 0 dB

Medium parameters used (interpolated): $f = 1782.5$ MHz; $\sigma = 1.413$ S/m; $\epsilon_r = 39.851$;

$\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7957; ConvF(7.68, 7.86, 8.15) @ 1782.5 MHz; Calibrated: 2025/10/6
- Modulation Compensation:
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn899; Calibrated: 2026/6/25
- Phantom: Twin-SAM V4.0 (20deg probe tilt); Type: QD 000 P40 CC; Serial: xxxx
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Configuration/CH19925(1782.5MHz Front)/Area Scan (61x81x1):

Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.0202 W/kg

Configuration/CH19925(1782.5MHz Front)/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.621 V/m; Power Drift = 0.16 dB


Peak SAR (extrapolated) = 0.0730 W/kg

SAR(1 g) = 0.021 W/kg; SAR(10 g) = 0.00896 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid (> 16 mm)

Ratio of SAR at M2 to SAR at M1 = 45.7%

Maximum value of SAR (measured) = 0.0326 W/kg

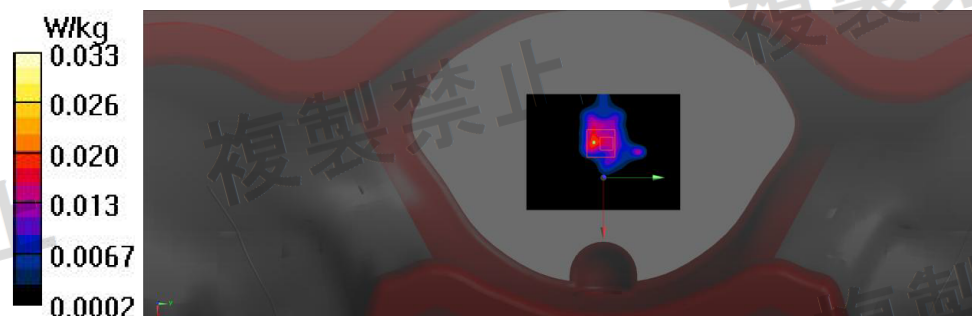

Test Laboratory: Audix SAR Lab

Date: 03/07/2026

CH19925(1782.5MHz Left)

DUT: LTE USB WIFI Stick Type: Wai-Link

Communication System: UID 0, Generic LTE (0); Communication System Band:

Band 3, E-UTRA/FDD (1710.0 - 1785.0 MHz); Frequency: 1782.5

MHz; Communication System PAR: 0 dB

Medium parameters used (interpolated): $f = 1782.5$ MHz; $\sigma = 1.413$ S/m; $\epsilon_r = 39.851$;

$\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7957; ConvF(7.68, 7.86, 8.15) @ 1782.5 MHz; Calibrated: 2025/10/6
- Modulation Compensation:
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn899; Calibrated: 2026/6/25
- Phantom: Twin-SAM V4.0 (20deg probe tilt); Type: QD 000 P40 CC; Serial: xxxx
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Configuration/CH19925(1782.5MHz Left)/Area Scan (61x81x1):

Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.0169 W/kg

Configuration/CH19925(1782.5MHz Left)/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.076 V/m; Power Drift = -0.09 dB


Peak SAR (extrapolated) = 0.0320 W/kg

SAR(1 g) = 0.010 W/kg; SAR(10 g) = 0.00359 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid (> 16 mm)

Ratio of SAR at M2 to SAR at M1 = 49.8%

Maximum value of SAR (measured) = 0.0233 W/kg

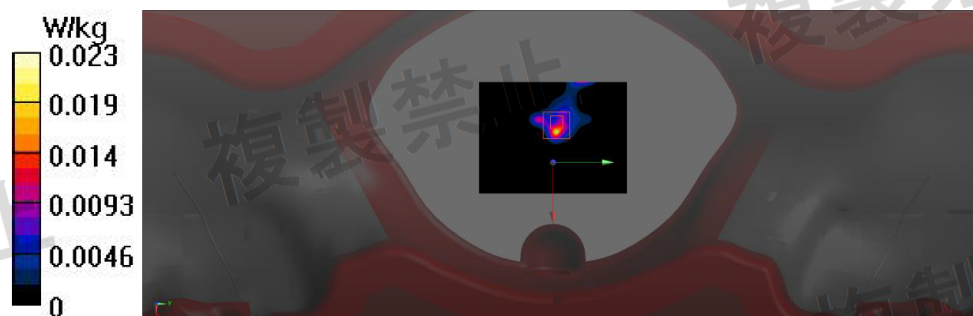

Test Laboratory: Audix SAR Lab

Date: 03/07/2026

CH19925(1782.5MHz Right)

DUT: LTE USB WIFI Stick Type: Wai-Link

Communication System: UID 0, Generic LTE (0); Communication System Band:

Band 3, E-UTRA/FDD (1710.0 - 1785.0 MHz); Frequency: 1782.5

MHz; Communication System PAR: 0 dB

Medium parameters used (interpolated): $f = 1782.5$ MHz; $\sigma = 1.413$ S/m; $\epsilon_r = 39.851$;

$\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7957; ConvF(7.68, 7.86, 8.15) @ 1782.5 MHz; Calibrated: 2025/10/6
- Modulation Compensation:
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn899; Calibrated: 2026/6/25
- Phantom: Twin-SAM V4.0 (20deg probe tilt); Type: QD 000 P40 CC; Serial: xxxx
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Configuration/CH19925(1782.5MHz Right)/Area Scan (61x81x1):

Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 0.125 W/kg

Configuration/CH19925(1782.5MHz Right)/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 8.600 V/m; Power Drift = 0.17 dB


Peak SAR (extrapolated) = 0.210 W/kg

SAR(1 g) = 0.133 W/kg; SAR(10 g) = 0.074 W/kg

Smallest distance from peaks to all points 3 dB below = 12.2 mm

Ratio of SAR at M2 to SAR at M1 = 65%

Maximum value of SAR (measured) = 0.146 W/kg

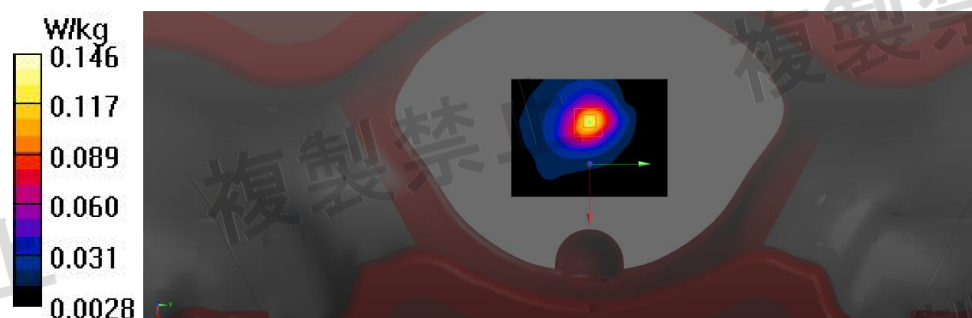

Test Laboratory: Audix SAR Lab

Date: 03/07/2026

CH19925(1782.5MHz Top)

DUT: LTE USB WIFI Stick Type: Wai-Link

Communication System: UID 0, Generic LTE (0); Communication System Band:

Band 3, E-UTRA/FDD (1710.0 - 1785.0 MHz); Frequency: 1782.5

MHz; Communication System PAR: 0 dB

Medium parameters used (interpolated): $f = 1782.5$ MHz; $\sigma = 1.413$ S/m; $\epsilon_r = 39.851$;

$\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7957; ConvF(7.68, 7.86, 8.15) @ 1782.5 MHz; Calibrated: 2025/10/6
- Modulation Compensation:
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn899; Calibrated: 2026/6/25
- Phantom: Twin-SAM V4.0 (20deg probe tilt); Type: QD 000 P40 CC; Serial: xxxx
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Configuration/CH19925(1782.5MHz Top)/Area Scan (61x81x1):

Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.0154 W/kg

Configuration/CH19925(1782.5MHz Top)/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.904 V/m; Power Drift = 0.12 dB


Peak SAR (extrapolated) = 0.0470 W/kg

SAR(1 g) = 0.012 W/kg; SAR(10 g) = 0.00598 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid (> 16 mm)

Ratio of SAR at M2 to SAR at M1 = 76.8%

Maximum value of SAR (measured) = 0.0156 W/kg

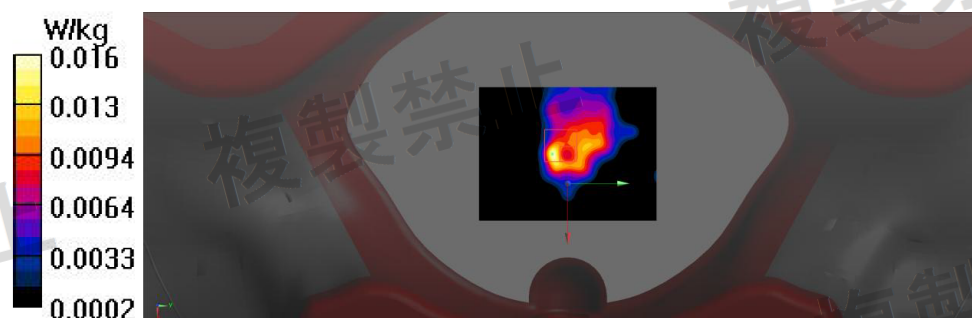

Test Mode: E-UTRA Band 8

Test Laboratory: Audix SAR Lab

Date: 02/07/2026

CH21750(910MHz Back)

DUT: LTE USB WIFI Stick Type: Wai-Link

Communication System: UID 0, Generic LTE (0); Communication System Band:

Band 8, E-UTRA/FDD (880.0 - 915.0 MHz); Frequency: 910 MHz; Communication

System PAR: 0 dB

Medium parameters used (interpolated): $f = 910$ MHz; $\sigma = 0.956$ S/m; $\epsilon_r = 40.608$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7957; ConvF(9.12, 9.33, 9.67) @ 910 MHz; Calibrated: 2025/10/6
- Modulation Compensation:
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn899; Calibrated: 2026/6/25
- Phantom: Twin-SAM V4.0 (20deg probe tilt); Type: QD 000 P40 CC; Serial: xxxx
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Configuration/CH21750(910MHz Back)/Area Scan (61x81x1):

Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 0.0177 W/kg

Configuration/CH21750(910MHz Back)/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 4.055 V/m; Power Drift = 0.15 dB


Peak SAR (extrapolated) = 0.0990 W/kg

SAR(1 g) = 0.020 W/kg; SAR(10 g) = 0.012 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid (> 16 mm)

Ratio of SAR at M2 to SAR at M1 = 40%

Maximum value of SAR (measured) = 0.0442 W/kg

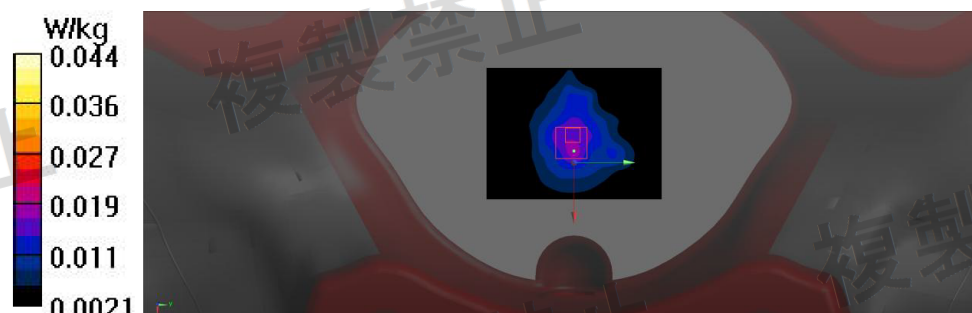

Test Laboratory: Audix SAR Lab

Date: 02/07/2026

CH21750(910MHz Bottom)

DUT: LTE USB WIFI Stick Type: Wai-Link

Communication System: UID 0, Generic LTE (0); Communication System Band:

Band 8, E-UTRA/FDD (880.0 - 915.0 MHz); Frequency: 910 MHz; Communication

System PAR: 0 dB

Medium parameters used (interpolated): $f = 910$ MHz; $\sigma = 0.956$ S/m; $\epsilon_r = 40.608$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7957; ConvF(9.12, 9.33, 9.67) @ 910 MHz; Calibrated: 2025/10/6
- Modulation Compensation:
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn899; Calibrated: 2026/6/25
- Phantom: Twin-SAM V4.0 (20deg probe tilt); Type: QD 000 P40 CC; Serial: xxxx
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Configuration/CH21750(910MHz Bottom)/Area Scan (61x81x1):

Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 0.0123 W/kg

Configuration/CH21750(910MHz Bottom)/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 1.589 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 0.00843 W/kg

SAR(1 g) = 0.00301 W/kg; SAR(10 g) = 0.00163 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid (> 16 mm)

Ratio of SAR at M2 to SAR at M1 = 41%

Maximum value of SAR (measured) = 0.00716 W/kg



Test Laboratory: Audix SAR Lab

Date: 02/07/2026

CH21750(910MHz Front)

DUT: LTE USB WIFI Stick Type: Wai-Link

Communication System: UID 0, Generic LTE (0); Communication System Band:

Band 8, E-UTRA/FDD (880.0 - 915.0 MHz); Frequency: 910 MHz; Communication

System PAR: 0 dB

Medium parameters used (interpolated): $f = 910 \text{ MHz}$; $\sigma = 0.956 \text{ S/m}$; $\epsilon_r = 40.608$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7957; ConvF(9.12, 9.33, 9.67) @ 910 MHz; Calibrated: 2025/10/6
- Modulation Compensation:
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn899; Calibrated: 2026/6/25
- Phantom: Twin-SAM V4.0 (20deg probe tilt); Type: QD 000 P40 CC; Serial: xxxx
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Configuration/CH21750(910MHz Front)/Area Scan (61x81x1):

Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.0300 W/kg

Configuration/CH21750(910MHz Front)/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 2.982 V/m ; Power Drift = -0.15 dB


Peak SAR (extrapolated) = 0.122 W/kg

SAR(1 g) = 0.014 W/kg ; SAR(10 g) = 0.00623 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid ($> 16 \text{ mm}$)

Ratio of SAR at M2 to SAR at M1 = 45.8%

Maximum value of SAR (measured) = 0.0325 W/kg

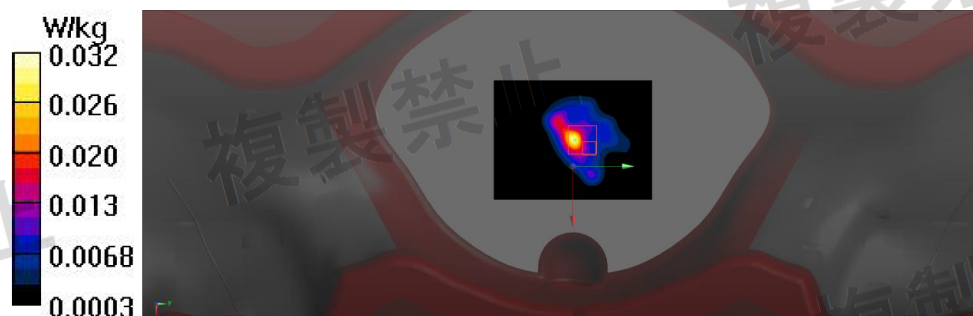

Test Laboratory: Audix SAR Lab

Date: 02/07/2026

CH21750(910MHz Left)

DUT: LTE USB WIFI Stick Type: Wai-Link

Communication System: UID 0, Generic LTE (0); Communication System Band:

Band 8, E-UTRA/FDD (880.0 - 915.0 MHz); Frequency: 910 MHz; Communication

System PAR: 0 dB

Medium parameters used (interpolated): $f = 910 \text{ MHz}$; $\sigma = 0.956 \text{ S/m}$; $\epsilon_r = 40.608$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7957; ConvF(9.12, 9.33, 9.67) @ 910 MHz; Calibrated: 2025/10/6
- Modulation Compensation:
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn899; Calibrated: 2026/6/25
- Phantom: Twin-SAM V4.0 (20deg probe tilt); Type: QD 000 P40 CC; Serial: xxxx
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Configuration/CH21750(910MHz Left)/Area Scan (61x81x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.0157 W/kg

Configuration/CH21750(910MHz Left)/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 1.555 V/m ; Power Drift = -0.11 dB


Peak SAR (extrapolated) = 0.0360 W/kg

SAR(1 g) = 0.00597 W/kg ; SAR(10 g) = 0.00286 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid ($> 16 \text{ mm}$)

Ratio of SAR at M2 to SAR at M1 = 43.6%

Maximum value of SAR (measured) = 0.0181 W/kg

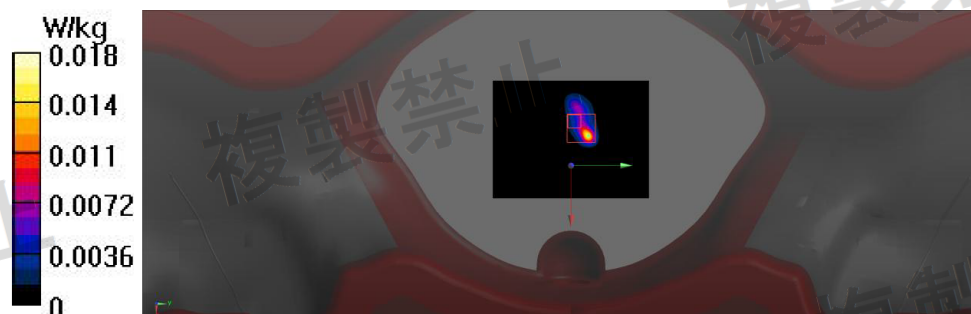

Test Laboratory: Audix SAR Lab

Date: 02/07/2026

CH21750(910MHz Right)

DUT: LTE USB WIFI Stick Type: Wai-Link

Communication System: UID 0, Generic LTE (0); Communication System Band:

Band 8, E-UTRA/FDD (880.0 - 915.0 MHz); Frequency: 910 MHz; Communication

System PAR: 0 dB

Medium parameters used (interpolated): $f = 910$ MHz; $\sigma = 0.956$ S/m; $\epsilon_r = 40.608$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7957; ConvF(9.12, 9.33, 9.67) @ 910 MHz; Calibrated: 2025/10/6
- Modulation Compensation:
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn899; Calibrated: 2026/6/25
- Phantom: Twin-SAM V4.0 (20deg probe tilt); Type: QD 000 P40 CC; Serial: xxxx
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Configuration/CH21750(910MHz Right)/Area Scan (61x81x1):

Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 0.0241 W/kg

Configuration/CH21750(910MHz Right)/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 4.937 V/m; Power Drift = -0.14 dB


Peak SAR (extrapolated) = 0.0330 W/kg

SAR(1 g) = 0.022 W/kg; SAR(10 g) = 0.014 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid (> 16 mm)

Ratio of SAR at M2 to SAR at M1 = 66.4%

Maximum value of SAR (measured) = 0.0236 W/kg

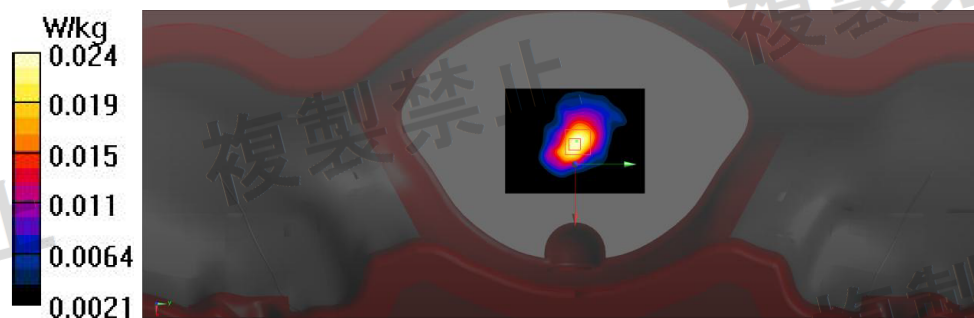

Test Laboratory: Audix SAR Lab

Date: 02/07/2026

CH21750(910MHz Top)

DUT: LTE USB WIFI Stick Type: Wai-Link

Communication System: UID 0, Generic LTE (0); Communication System Band:

Band 8, E-UTRA/FDD (880.0 - 915.0 MHz); Frequency: 910 MHz; Communication

System PAR: 0 dB

Medium parameters used (interpolated): $f = 910 \text{ MHz}$; $\sigma = 0.956 \text{ S/m}$; $\epsilon_r = 40.608$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7957; ConvF(9.12, 9.33, 9.67) @ 910 MHz; Calibrated: 2025/10/6
- Modulation Compensation:
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn899; Calibrated: 2026/6/25
- Phantom: Twin-SAM V4.0 (20deg probe tilt); Type: QD 000 P40 CC; Serial: xxxx
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Configuration/CH21750(910MHz Top)/Area Scan (61x81x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.0132 W/kg

Configuration/CH21750(910MHz Top)/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 2.114 V/m ; Power Drift = -0.11 dB


Peak SAR (extrapolated) = 0.0210 W/kg

SAR(1 g) = 0.00508 W/kg ; SAR(10 g) = 0.00259 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid ($> 16 \text{ mm}$)

Ratio of SAR at M2 to SAR at M1 = 72.7%

Maximum value of SAR (measured) = 0.00709 W/kg

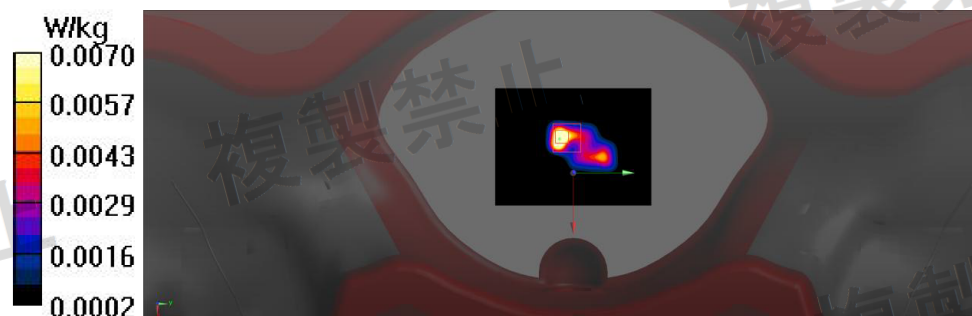

Test Mode: E-UTRA Band 26

Test Laboratory: Audix SAR Lab

Date: 02/07/2026

CH26725(817.5MHz Back)

DUT: LTE USB WIFI Stick Type: Wai-Link

Communication System: UID 0, Generic LTE (0); Communication System Band:

Band 26, E-UTRA/FDD (817.0 - 843.0 MHz); Frequency: 817.5

MHz; Communication System PAR: 0 dB

Medium parameters used (extrapolated): $f = 817.5$ MHz; $\sigma = 0.875$ S/m; $\epsilon_r = 41.711$;

$\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7957; ConvF(9.15, 9.35, 9.7) @ 817.5 MHz; Calibrated: 2025/10/6
- Modulation Compensation:
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn899; Calibrated: 2026/6/25
- Phantom: Twin-SAM V4.0 (20deg probe tilt); Type: QD 000 P40 CC; Serial: xxxx
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Configuration/CH26725(817.5MHz Back)/Area Scan (61x81x1):

Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 0.0107 W/kg

Configuration/CH26725(817.5MHz Back)/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 2.155 V/m; Power Drift = -0.10 dB


Peak SAR (extrapolated) = 0.0460 W/kg

SAR(1 g) = 0.00998 W/kg; SAR(10 g) = 0.00352 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid (> 16 mm)

Ratio of SAR at M2 to SAR at M1 = 40.1%

Maximum value of SAR (measured) = 0.0231 W/kg

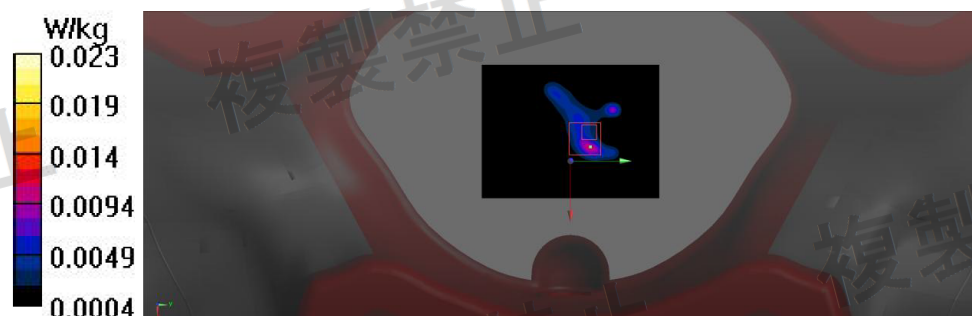

Test Laboratory: Audix SAR Lab

Date: 02/07/2026

CH26725(817.5MHz Bottom)

DUT: LTE USB WIFI Stick Type: Wai-Link

Communication System: UID 0, Generic LTE (0); Communication System Band:

Band 26, E-UTRA/FDD (817.0 - 843.0 MHz); Frequency: 817.5

MHz; Communication System PAR: 0 dB

Medium parameters used (extrapolated): $f = 817.5$ MHz; $\sigma = 0.875$ S/m; $\epsilon_r = 41.711$;

$\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7957; ConvF(9.15, 9.35, 9.7) @ 817.5 MHz; Calibrated: 2025/10/6
- Modulation Compensation:
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn899; Calibrated: 2026/6/25
- Phantom: Twin-SAM V4.0 (20deg probe tilt); Type: QD 000 P40 CC; Serial: xxxx
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Configuration/CH26725(817.5MHz Bottom)/Area Scan (61x81x1):

Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.0152 W/kg

Configuration/CH26725(817.5MHz Bottom)/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.540 V/m; Power Drift = 0.16 dB


Peak SAR (extrapolated) = 0.0460 W/kg

SAR(1 g) = 0.012 W/kg; SAR(10 g) = 0.00612 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid (> 16 mm)

Ratio of SAR at M2 to SAR at M1 = 45.8%

Maximum value of SAR (measured) = 0.0145 W/kg

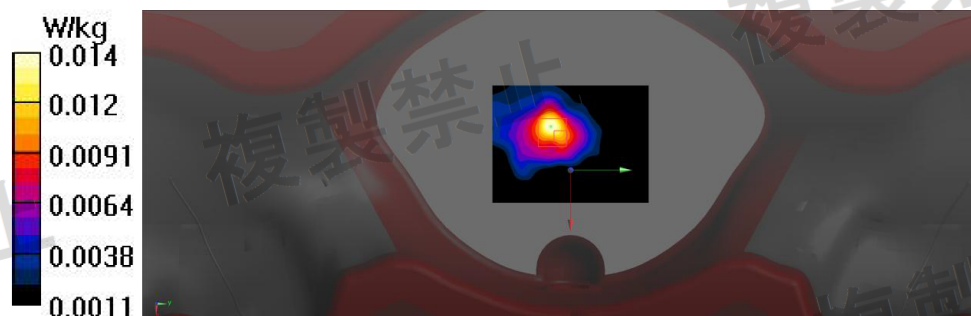

Test Laboratory: Audix SAR Lab

Date: 02/07/2026

CH26725(817.5MHz Front)

DUT: LTE USB WIFI Stick Type: Wai-Link

Communication System: UID 0, Generic LTE (0); Communication System Band:

Band 26, E-UTRA/FDD (817.0 - 843.0 MHz); Frequency: 817.5

MHz; Communication System PAR: 0 dB

Medium parameters used (extrapolated): $f = 817.5$ MHz; $\sigma = 0.875$ S/m; $\epsilon_r = 41.711$;

$\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7957; ConvF(9.15, 9.35, 9.7) @ 817.5 MHz; Calibrated: 2025/10/6
- Modulation Compensation:
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn899; Calibrated: 2026/6/25
- Phantom: Twin-SAM V4.0 (20deg probe tilt); Type: QD 000 P40 CC; Serial: xxxx
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Configuration/CH26725(817.5MHz Front)/Area Scan (61x81x1):

Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.0237 W/kg

Configuration/CH26725(817.5MHz Front)/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.486 V/m; Power Drift = 0.18 dB


Peak SAR (extrapolated) = 0.0520 W/kg

SAR(1 g) = 0.00912 W/kg; SAR(10 g) = 0.00436 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid (> 16 mm)

Ratio of SAR at M2 to SAR at M1 = 47.1%

Maximum value of SAR (measured) = 0.0203 W/kg

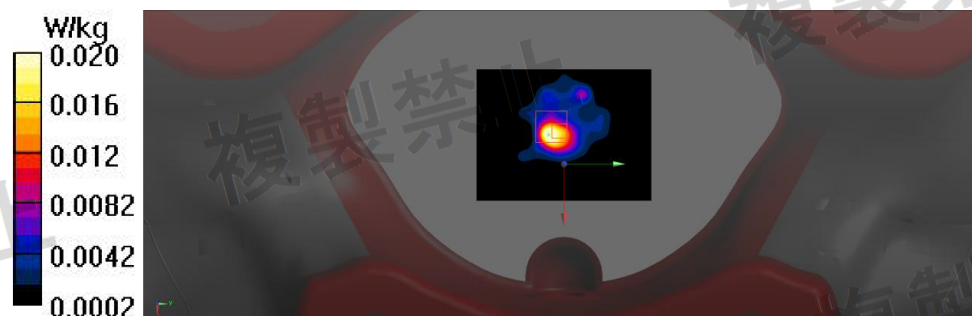

Test Laboratory: Audix SAR Lab

Date: 02/07/2026

CH26725(817.5MHz Left)

DUT: LTE USB WIFI Stick Type: Wai-Link

Communication System: UID 0, Generic LTE (0); Communication System Band:

Band 26, E-UTRA/FDD (817.0 - 843.0 MHz); Frequency: 817.5

MHz; Communication System PAR: 0 dB

Medium parameters used (extrapolated): $f = 817.5$ MHz; $\sigma = 0.875$ S/m; $\epsilon_r = 41.711$;

$\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7957; ConvF(9.15, 9.35, 9.7) @ 817.5 MHz; Calibrated: 2025/10/6
- Modulation Compensation:
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn899; Calibrated: 2026/6/25
- Phantom: Twin-SAM V4.0 (20deg probe tilt); Type: QD 000 P40 CC; Serial: xxxx
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Configuration/CH26725(817.5MHz Left)/Area Scan (61x81x1):

Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.00758 W/kg

Configuration/CH26725(817.5MHz Left)/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 1.425 V/m; Power Drift = 0.17 dB


Peak SAR (extrapolated) = 0.0690 W/kg

SAR(1 g) = 0.004 W/kg; SAR(10 g) = 0.00167 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid (> 16 mm)

Ratio of SAR at M2 to SAR at M1 = 48.2%

Maximum value of SAR (measured) = 0.0154 W/kg

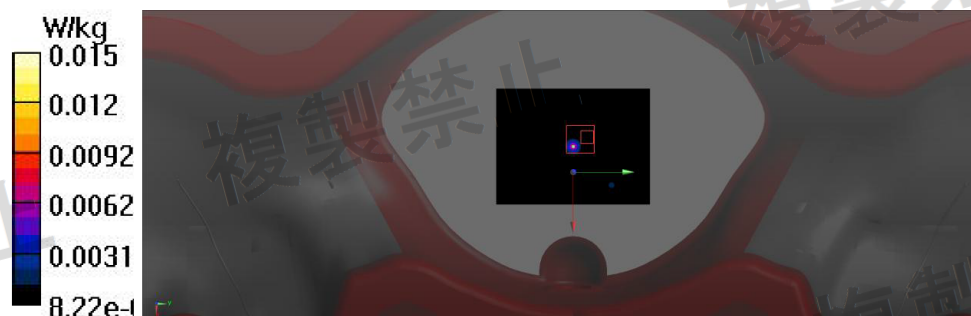

Test Laboratory: Audix SAR Lab

Date: 02/07/2026

CH26725(817.5MHz Right)

DUT: LTE USB WIFI Stick Type: Wai-Link

Communication System: UID 0, Generic LTE (0); Communication System Band:

Band 26, E-UTRA/FDD (817.0 - 843.0 MHz); Frequency: 817.5

MHz; Communication System PAR: 0 dB

Medium parameters used (extrapolated): $f = 817.5$ MHz; $\sigma = 0.875$ S/m; $\epsilon_r = 41.711$;

$\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7957; ConvF(9.15, 9.35, 9.7) @ 817.5 MHz; Calibrated: 2025/10/6
- Modulation Compensation:
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn899; Calibrated: 2026/6/25
- Phantom: Twin-SAM V4.0 (20deg probe tilt); Type: QD 000 P40 CC; Serial: xxxx
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Configuration/CH26725(817.5MHz Right)/Area Scan (61x81x1):

Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.0135 W/kg

Configuration/CH26725(817.5MHz Right)/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.793 V/m; Power Drift = 0.12 dB


Peak SAR (extrapolated) = 0.0370 W/kg

SAR(1 g) = 0.013 W/kg; SAR(10 g) = 0.00818 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid (> 16 mm)

Ratio of SAR at M2 to SAR at M1 = 45.2%

Maximum value of SAR (measured) = 0.0173 W/kg

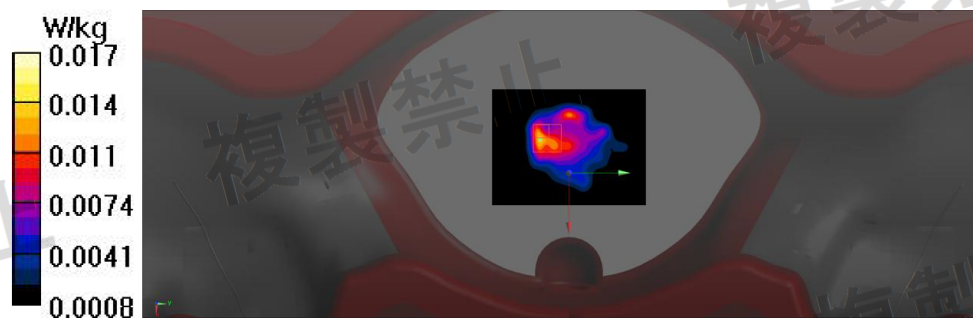

Test Laboratory: Audix SAR Lab

Date: 02/07/2026

CH26725(817.5MHz Top)

DUT: LTE USB WIFI Stick Type: Wai-Link

Communication System: UID 0, Generic LTE (0); Communication System Band:

Band 26, E-UTRA/FDD (817.0 - 843.0 MHz); Frequency: 817.5

MHz; Communication System PAR: 0 dB

Medium parameters used (extrapolated): $f = 817.5$ MHz; $\sigma = 0.875$ S/m; $\epsilon_r = 41.711$;

$\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7957; ConvF(9.15, 9.35, 9.7) @ 817.5 MHz; Calibrated: 2025/10/6
- Modulation Compensation:
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn899; Calibrated: 2026/6/25
- Phantom: Twin-SAM V4.0 (20deg probe tilt); Type: QD 000 P40 CC; Serial: xxxx
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Configuration/CH26725(817.5MHz Top)/Area Scan (61x81x1):

Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.0490 W/kg

Configuration/CH26725(817.5MHz Top)/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.336 V/m; Power Drift = -0.16 dB


Peak SAR (extrapolated) = 0.0500 W/kg

SAR(1 g) = 0.038 W/kg; SAR(10 g) = 0.027 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid (> 16 mm)

Ratio of SAR at M2 to SAR at M1 = 77.5%

Maximum value of SAR (measured) = 0.0413 W/kg

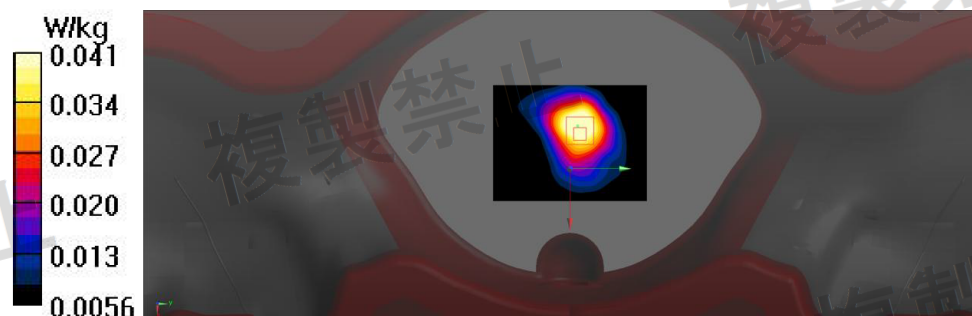

Test Mode: E-UTRA Band 28

Test Laboratory: Audix SAR Lab
CH27510(733MHz Back)

Date: 01/07/2026

DUT: LTE USB WIFI Stick Type: Wai-Link

Communication System: UID 0, Generic LTE (0); Communication System Band:

Band 28, E-UTRA/FDD (720.0 - 740.0 MHz); Frequency: 733 MHz; Communication

System PAR: 0 dB

Medium parameters used: $f = 824.04$ MHz; $\sigma = 0.88$ S/m; $\epsilon_r = 41.63$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7957; ConvF(9.4, 9.61, 9.97) @ 733 MHz; Calibrated: 2025/10/6
- Modulation Compensation:
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn899; Calibrated: 2026/6/25
- Phantom: Twin-SAM V4.0 (20deg probe tilt); Type: QD 000 P40 CC; Serial: xxxx
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Configuration/CH27510(733MHz Back)/Area Scan (61x81x1):

Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 0.193 W/kg

Configuration/CH27510(733MHz Back)/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 2.808 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 0.0520 W/kg

SAR(1 g) = 0.039 W/kg; SAR(10 g) = 0.029 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid (> 16 mm)

Ratio of SAR at M2 to SAR at M1 = 78%

Maximum value of SAR (measured) = 0.0434 W/kg



Test Laboratory: Audix SAR Lab

Date: 01/07/2026

CH27510(733MHz Bottom)

DUT: LTE USB WIFI Stick Type: Wai-Link

Communication System: UID 0, Generic LTE (0); Communication System Band:

Band 28, E-UTRA/FDD (720.0 - 740.0 MHz); Frequency: 733 MHz; Communication

System PAR: 0 dB

Medium parameters used: $f = 824.04$ MHz; $\sigma = 0.88$ S/m; $\epsilon_r = 41.63$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7957; ConvF(9.4, 9.61, 9.97) @ 733 MHz; Calibrated: 2025/10/6
- Modulation Compensation:
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn899; Calibrated: 2026/6/25
- Phantom: Twin-SAM V4.0 (20deg probe tilt); Type: QD 000 P40 CC; Serial: xxxx
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Configuration/CH27510(733MHz Bottom)/Area Scan (61x81x1):

Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 0.0343 W/kg

Configuration/CH27510(733MHz Bottom)/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 6.218 V/m; Power Drift = -0.08 dB


Peak SAR (extrapolated) = 0.0750 W/kg

SAR(1 g) = 0.039 W/kg; SAR(10 g) = 0.026 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid (> 16 mm)

Ratio of SAR at M2 to SAR at M1 = 58.3%

Maximum value of SAR (measured) = 0.0446 W/kg

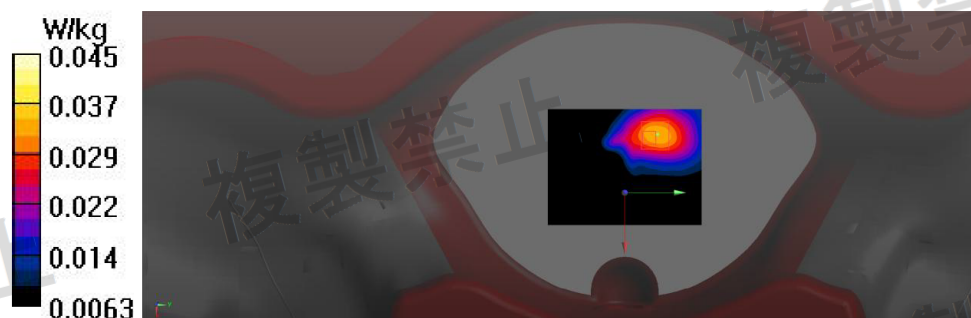

Test Laboratory: Audix SAR Lab

Date: 01/07/2026

CH27510(733MHz Front)

DUT: LTE USB WIFI Stick Type: Wai-Link

Communication System: UID 0, Generic LTE (0); Communication System Band:

Band 28, E-UTRA/FDD (720.0 - 740.0 MHz); Frequency: 733 MHz; Communication

System PAR: 0 dB

Medium parameters used: $f = 824.04$ MHz; $\sigma = 0.88$ S/m; $\epsilon_r = 41.63$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7957; ConvF(9.4, 9.61, 9.97) @ 733 MHz; Calibrated: 2025/10/6
- Modulation Compensation:
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn899; Calibrated: 2026/6/25
- Phantom: Twin-SAM V4.0 (20deg probe tilt); Type: QD 000 P40 CC; Serial: xxxx
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Configuration/CH27510(733MHz Front)/Area Scan (61x81x1):

Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 0.0368 W/kg

Configuration/CH27510(733MHz Front)/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 6.547 V/m; Power Drift = -0.18 dB


Peak SAR (extrapolated) = 0.0730 W/kg

SAR(1 g) = 0.038 W/kg; SAR(10 g) = 0.023 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid (> 16 mm)

Ratio of SAR at M2 to SAR at M1 = 51.1%

Maximum value of SAR (measured) = 0.0522 W/kg

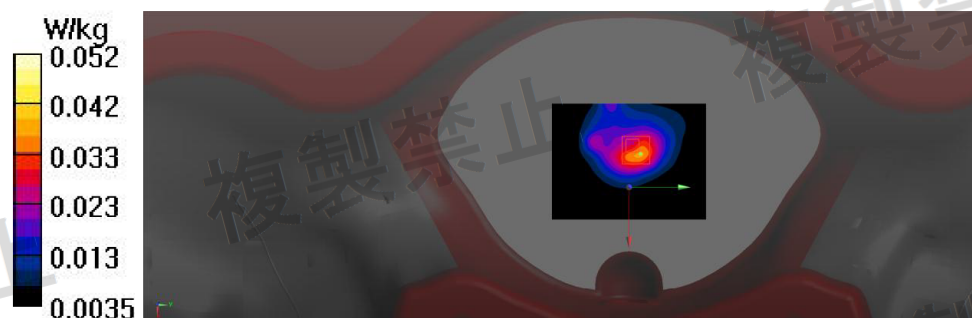

Test Laboratory: Audix SAR Lab

Date: 01/07/2026

CH27510(733MHz Left)

DUT: LTE USB WIFI Stick Type: Wai-Link

Communication System: UID 0, Generic LTE (0); Communication System Band:

Band 28, E-UTRA/FDD (720.0 - 740.0 MHz); Frequency: 733 MHz; Communication

System PAR: 0 dB

Medium parameters used: $f = 824.04$ MHz; $\sigma = 0.88$ S/m; $\epsilon_r = 41.63$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7957; ConvF(9.4, 9.61, 9.97) @ 733 MHz; Calibrated: 2025/10/6
- Modulation Compensation:
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn899; Calibrated: 2026/6/25
- Phantom: Twin-SAM V4.0 (20deg probe tilt); Type: QD 000 P40 CC; Serial: xxxx
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Configuration/CH27510(733MHz Left)/Area Scan (61x81x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 0.00798 W/kg

Configuration/CH27510(733MHz Left)/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 0.8860 V/m; Power Drift = 0.18 dB


Peak SAR (extrapolated) = 0.0170 W/kg

SAR(1 g) = 0.00488 W/kg; SAR(10 g) = 0.00348 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid (> 16 mm)

Ratio of SAR at M2 to SAR at M1 = 43.6%

Maximum value of SAR (measured) = 0.00713 W/kg

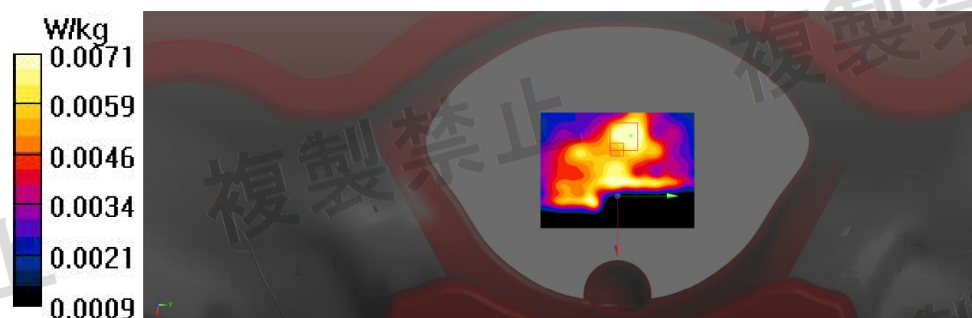

Test Laboratory: Audix SAR Lab

Date: 01/07/2026

CH27510(733MHz Right)

DUT: LTE USB WIFI Stick Type: Wai-Link

Communication System: UID 0, Generic LTE (0); Communication System Band:

Band 28, E-UTRA/FDD (720.0 - 740.0 MHz); Frequency: 733 MHz; Communication

System PAR: 0 dB

Medium parameters used: $f = 824.04$ MHz; $\sigma = 0.88$ S/m; $\epsilon_r = 41.63$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7957; ConvF(9.4, 9.61, 9.97) @ 733 MHz; Calibrated: 2025/10/6
- Modulation Compensation:
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn899; Calibrated: 2026/6/25
- Phantom: Twin-SAM V4.0 (20deg probe tilt); Type: QD 000 P40 CC; Serial: xxxx
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Configuration/CH27510(733MHz Right)/Area Scan (61x81x1):

Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 0.0749 W/kg

Configuration/CH27510(733MHz Right)/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 8.899 V/m; Power Drift = 0.13 dB


Peak SAR (extrapolated) = 0.0840 W/kg

SAR(1 g) = 0.064 W/kg; SAR(10 g) = 0.044 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid (> 16 mm)

Ratio of SAR at M2 to SAR at M1 = 76.2%

Maximum value of SAR (measured) = 0.0705 W/kg

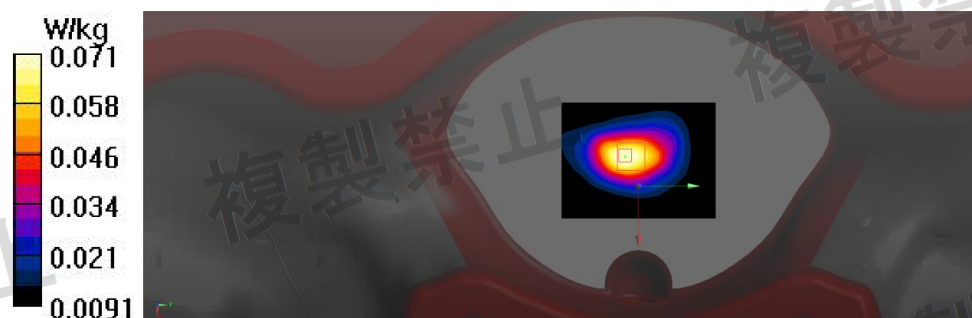

Test Laboratory: Audix SAR Lab

Date: 01/07/2026

CH27510(733MHz Top)

DUT: LTE USB WIFI Stick Type: Wai-Link

Communication System: UID 0, Generic LTE (0); Communication System Band:

Band 28, E-UTRA/FDD (720.0 - 740.0 MHz); Frequency: 733 MHz; Communication

System PAR: 0 dB

Medium parameters used: $f = 824.04$ MHz; $\sigma = 0.88$ S/m; $\epsilon_r = 41.63$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7957; ConvF(9.4, 9.61, 9.97) @ 733 MHz; Calibrated: 2025/10/6
- Modulation Compensation:
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn899; Calibrated: 2026/6/25
- Phantom: Twin-SAM V4.0 (20deg probe tilt); Type: QD 000 P40 CC; Serial: xxxx
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Configuration/CH27510(733MHz Top)/Area Scan (61x81x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 0.0236 W/kg

Configuration/CH27510(733MHz Top)/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 4.326 V/m; Power Drift = 0.04 dB


Peak SAR (extrapolated) = 0.0310 W/kg

SAR(1 g) = 0.023 W/kg; SAR(10 g) = 0.016 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid (> 16 mm)

Ratio of SAR at M2 to SAR at M1 = 76.9%

Maximum value of SAR (measured) = 0.0244 W/kg

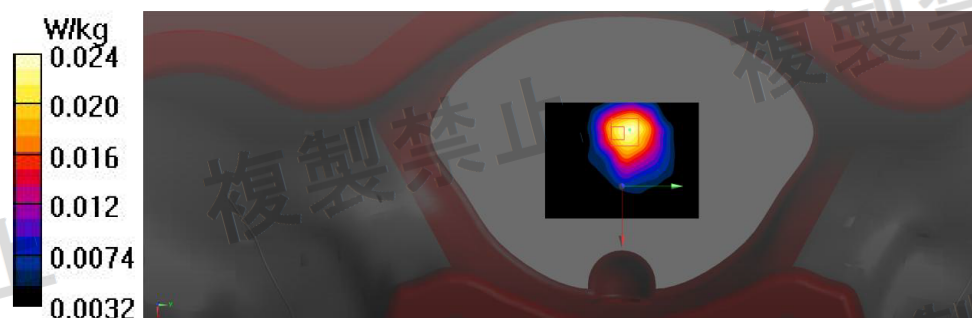

Test Mode: E-UTRA Band 34

Test Laboratory: Audix SAR Lab
CH36325(2022.5MHz Back)

Date: 05/07/2026

DUT: LTE USB WIFI Stick Type: Wai-Link

Communication System: UID 0, Generic LTE (0); Communication System Band:

Band 34, E-UTRA/TDD (2010.0 - 2025.0 MHz); Frequency: 2022.5

MHz; Communication System PAR: 0 dB

Medium parameters used: $f = 2017.5$ MHz; $\sigma = 1.411$ S/m; $\epsilon_r = 39.92$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7957; ConvF(7.47, 7.64, 7.92) @ 2022.5 MHz; Calibrated: 2025/10/6
- Modulation Compensation:
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn899; Calibrated: 2026/6/25
- Phantom: Twin-SAM V4.0 (20deg probe tilt); Type: QD 000 P40 CC; Serial: xxxx
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Configuration/CH36325(2022.5MHz Back)/Area Scan (61x81x1):

Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 0.0287 W/kg

Configuration/CH36325(2022.5MHz Back)/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 1.905 V/m; Power Drift = 0.16 dB


Peak SAR (extrapolated) = 0.0690 W/kg

SAR(1 g) = 0.021 W/kg; SAR(10 g) = 0.00769 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid (> 16 mm)

Ratio of SAR at M2 to SAR at M1 = 6.9%

Maximum value of SAR (measured) = 0.0473 W/kg

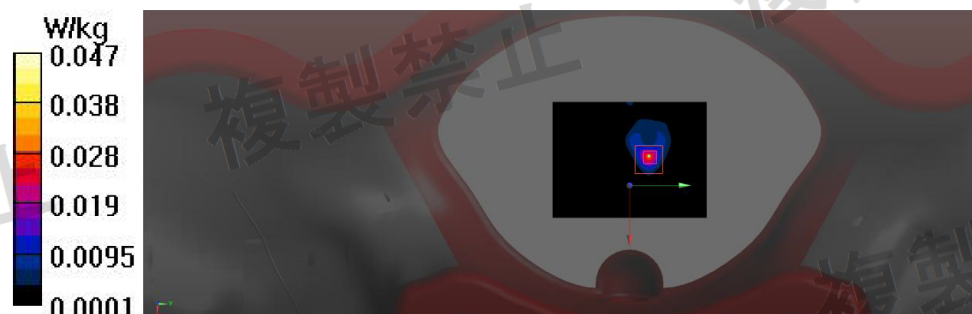

Test Laboratory: Audix SAR Lab

Date: 05/07/2026

CH36325(2022.5MHz Bottom)

DUT: LTE USB WIFI Stick Type: Wai-Link

Communication System: UID 0, Generic LTE (0); Communication System Band:

Band 34, E-UTRA/TDD (2010.0 - 2025.0 MHz); Frequency: 2022.5

MHz; Communication System PAR: 0 dB

Medium parameters used: $f = 2017.5$ MHz; $\sigma = 1.411$ S/m; $\epsilon_r = 39.92$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7957; ConvF(7.47, 7.64, 7.92) @ 2022.5 MHz; Calibrated: 2025/10/6
- Modulation Compensation:
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn899; Calibrated: 2026/6/25
- Phantom: Twin-SAM V4.0 (20deg probe tilt); Type: QD 000 P40 CC; Serial: xxxx
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Configuration/CH36325(2022.5MHz Bottom)/Area Scan (61x81x1):

Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.0424 W/kg

Configuration/CH36325(2022.5MHz Bottom)/Zoom Scan (5x5x7)/Cube

0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.040 V/m; Power Drift = -0.10 dB


Peak SAR (extrapolated) = 0.0800 W/kg

SAR(1 g) = 0.036 W/kg; SAR(10 g) = 0.019 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid (> 16 mm)

Ratio of SAR at M2 to SAR at M1 = 42.1%

Maximum value of SAR (measured) = 0.0457 W/kg

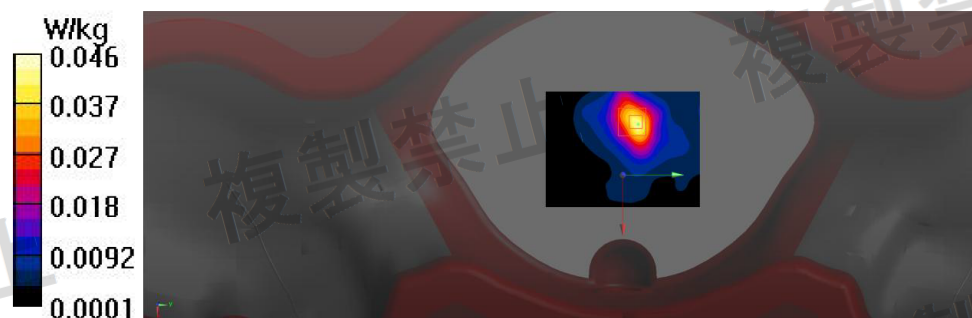

Test Laboratory: Audix SAR Lab

Date: 05/07/2026

CH36325(2022.5MHz Front)

DUT: LTE USB WIFI Stick Type: Wai-Link

Communication System: UID 0, Generic LTE (0); Communication System Band:

Band 34, E-UTRA/TDD (2010.0 - 2025.0 MHz); Frequency: 2022.5

MHz; Communication System PAR: 0 dB

Medium parameters used: $f = 2017.5$ MHz; $\sigma = 1.411$ S/m; $\epsilon_r = 39.92$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7957; ConvF(7.47, 7.64, 7.92) @ 2022.5 MHz; Calibrated: 2025/10/6
- Modulation Compensation:
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn899; Calibrated: 2026/6/25
- Phantom: Twin-SAM V4.0 (20deg probe tilt); Type: QD 000 P40 CC; Serial: xxxx
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Configuration/CH36325(2022.5MHz Front)/Area Scan (61x81x1):

Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 0.0407 W/kg

Configuration/CH36325(2022.5MHz Front)/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 2.119 V/m; Power Drift = 0.15 dB

Peak SAR (extrapolated) = 0.196 W/kg

SAR(1 g) = 0.036 W/kg; SAR(10 g) = 0.013 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid (> 16 mm)

Ratio of SAR at M2 to SAR at M1 = 20.9%

Maximum value of SAR (measured) = 0.0653 W/kg



Test Laboratory: Audix SAR Lab

Date: 05/07/2026

CH36325(2022.5MHz Left)

DUT: LTE USB WIFI Stick Type: Wai-Link

Communication System: UID 0, Generic LTE (0); Communication System Band:

Band 34, E-UTRA/TDD (2010.0 - 2025.0 MHz); Frequency: 2022.5

MHz; Communication System PAR: 0 dB

Medium parameters used: $f = 2017.5$ MHz; $\sigma = 1.411$ S/m; $\epsilon_r = 39.92$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7957; ConvF(7.47, 7.64, 7.92) @ 2022.5 MHz; Calibrated: 2025/10/6
- Modulation Compensation:
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn899; Calibrated: 2026/6/25
- Phantom: Twin-SAM V4.0 (20deg probe tilt); Type: QD 000 P40 CC; Serial: xxxx
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Configuration/CH36325(2022.5MHz Left)/Area Scan (61x81x1):

Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 0.0323 W/kg

Configuration/CH36325(2022.5MHz Left)/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 2.810 V/m; Power Drift = -0.12 dB


Peak SAR (extrapolated) = 0.0220 W/kg

SAR(1 g) = 0.010 W/kg; SAR(10 g) = 0.00618 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid (> 16 mm)

Ratio of SAR at M2 to SAR at M1 = 20.1%

Maximum value of SAR (measured) = 0.0133 W/kg

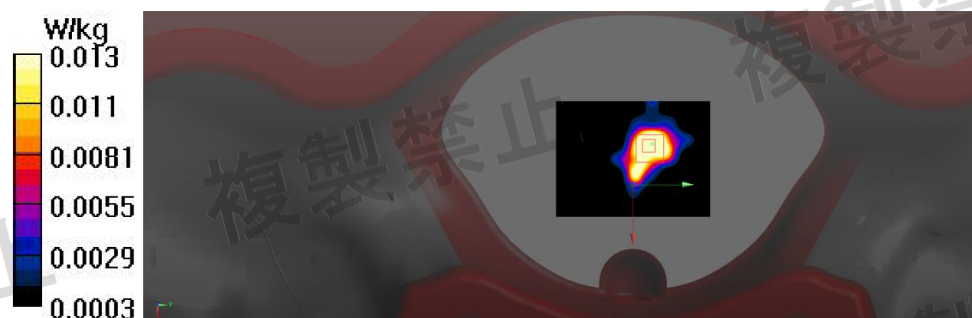

Test Laboratory: Audix SAR Lab

Date: 05/07/2026

CH36325(2022.5MHz Right)

DUT: LTE USB WIFI Stick Type: Wai-Link

Communication System: UID 0, Generic LTE (0); Communication System Band:

Band 34, E-UTRA/TDD (2010.0 - 2025.0 MHz); Frequency: 2022.5

MHz; Communication System PAR: 0 dB

Medium parameters used: $f = 2017.5$ MHz; $\sigma = 1.411$ S/m; $\epsilon_r = 39.92$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7957; ConvF(7.47, 7.64, 7.92) @ 2022.5 MHz; Calibrated: 2025/10/6
- Modulation Compensation:
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn899; Calibrated: 2026/6/25
- Phantom: Twin-SAM V4.0 (20deg probe tilt); Type: QD 000 P40 CC; Serial: xxxx
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Configuration/CH36325(2022.5MHz Right)/Area Scan (61x81x1):

Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 0.0323 W/kg

Configuration/CH36325(2022.5MHz Right)/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 1.401 V/m; Power Drift = 0.20 dB


Peak SAR (extrapolated) = 0.103 W/kg

SAR(1 g) = 0.015 W/kg; SAR(10 g) = 0.00759 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid (> 16 mm)

Ratio of SAR at M2 to SAR at M1 = 43.3%

Maximum value of SAR (measured) = 0.0189 W/kg

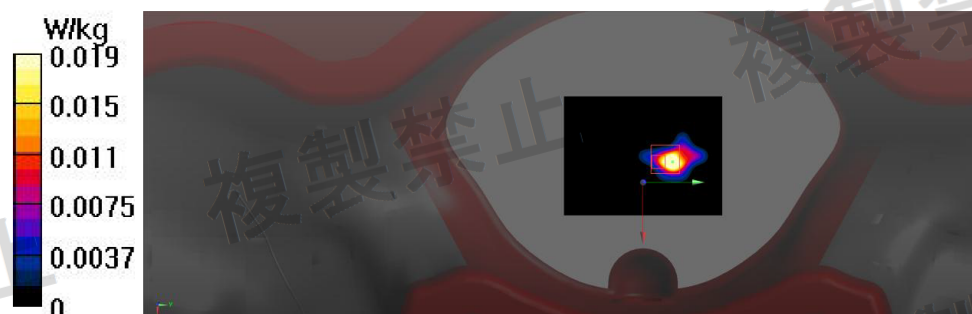

Test Laboratory: Audix SAR Lab

Date: 05/07/2026

CH36325(2022.5MHz Top)

DUT: LTE USB WIFI Stick Type: Wai-Link

Communication System: UID 0, Generic LTE (0); Communication System Band:

Band 34, E-UTRA/TDD (2010.0 - 2025.0 MHz); Frequency: 2022.5

MHz; Communication System PAR: 0 dB

Medium parameters used: $f = 2017.5$ MHz; $\sigma = 1.411$ S/m; $\epsilon_r = 39.92$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7957; ConvF(7.47, 7.64, 7.92) @ 2022.5 MHz; Calibrated: 2025/10/6
- Modulation Compensation:
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn899; Calibrated: 2026/6/25
- Phantom: Twin-SAM V4.0 (20deg probe tilt); Type: QD 000 P40 CC; Serial: xxxx
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Configuration/CH36325(2022.5MHz Top)/Area Scan (61x81x1):

Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 0.0271 W/kg

Configuration/CH36325(2022.5MHz Top)/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 3.050 V/m; Power Drift = -0.19 dB


Peak SAR (extrapolated) = 0.0260 W/kg

SAR(1 g) = 0.00872 W/kg; SAR(10 g) = 0.00257 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid (> 16 mm)

Ratio of SAR at M2 to SAR at M1 = 15.5%

Maximum value of SAR (measured) = 0.0160 W/kg

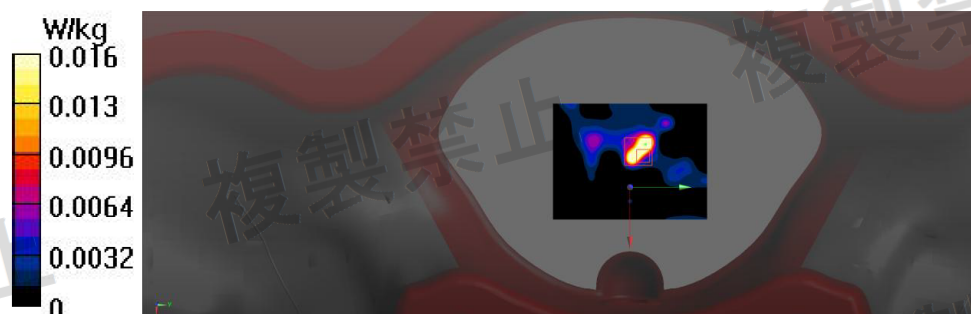

Test Mode: E-UTRA Band 39

Test Laboratory: Audix SAR Lab
CH38566(1911.6MHz Back)

Date: 04/07/2026

DUT: LTE USB WIFI Stick Type: Wai-Link

Communication System: UID 0, Generic LTE (0); Communication System Band:

Band 39, E-UTRA/TDD (1880.0 - 1920.0 MHz); Frequency: 1911.6

MHz; Communication System PAR: 0 dB

Medium parameters used (extrapolated): $f = 1911.6 \text{ MHz}$; $\sigma = 1.482 \text{ S/m}$; $\epsilon_r = 39.592$;
 $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7957; ConvF(7.57, 7.74, 8.03) @ 1911.6 MHz;
 Calibrated: 2025/10/6
- Modulation Compensation:
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn899; Calibrated: 2026/6/25
- Phantom: Twin-SAM V4.0 (20deg probe tilt); Type: QD 000 P40 CC; Serial:
 xxxx
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14
 (7501)

Configuration/CH38566(1911.6MHz Back)/Area Scan (61x81x1):

Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.0273 W/kg

Configuration/CH38566(1911.6MHz Back)/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 2.156 V/m; Power Drift = 0.19 dB


Peak SAR (extrapolated) = 0.0900 W/kg

SAR(1 g) = 0.022 W/kg; SAR(10 g) = 0.00791 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid
 (> 16 mm)

Ratio of SAR at M2 to SAR at M1 = 0.3%

Maximum value of SAR (measured) = 0.0905 W/kg

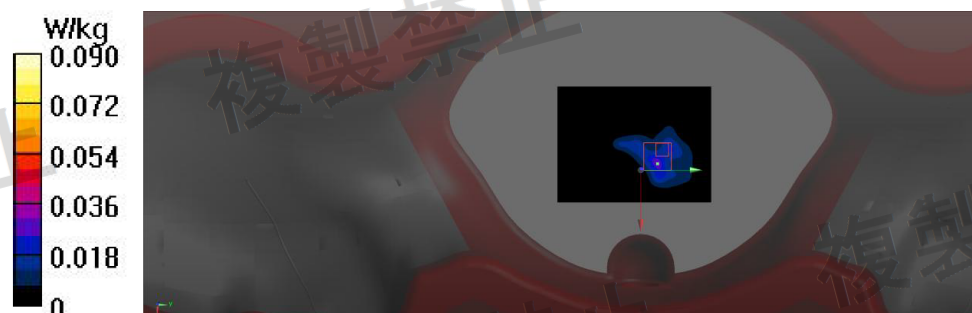

Test Laboratory: Audix SAR Lab

Date: 04/07/2026

CH38566(1911.6MHz Bottom)

DUT: LTE USB WIFI Stick Type: Wai-Link

Communication System: UID 0, Generic LTE (0); Communication System Band:

Band 39, E-UTRA/TDD (1880.0 - 1920.0 MHz); Frequency: 1911.6

MHz; Communication System PAR: 0 dB

Medium parameters used (extrapolated): $f = 1911.6$ MHz; $\sigma = 1.482$ S/m; $\epsilon_r = 39.592$;

$\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7957; ConvF(7.57, 7.74, 8.03) @ 1911.6 MHz; Calibrated: 2025/10/6
- Modulation Compensation:
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn899; Calibrated: 2026/6/25
- Phantom: Twin-SAM V4.0 (20deg probe tilt); Type: QD 000 P40 CC; Serial: xxxx
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Configuration/CH38566(1911.6MHz Bottom)/Area Scan (61x81x1):

Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.0207 W/kg

Configuration/CH38566(1911.6MHz Bottom)/Zoom Scan (5x5x7)/Cube

0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 1.088 V/m; Power Drift = 0.13 dB


Peak SAR (extrapolated) = 0.0160 W/kg

SAR(1 g) = 0.00703 W/kg; SAR(10 g) = 0.00235 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid (> 16 mm)

Ratio of SAR at M2 to SAR at M1 = 49.4%

Maximum value of SAR (measured) = 0.0164 W/kg

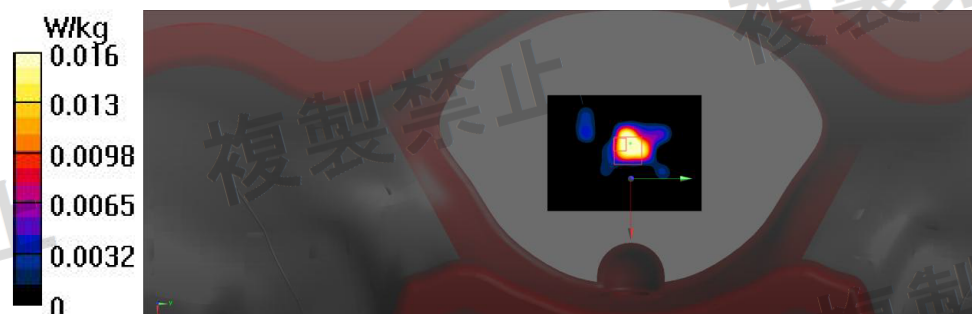

Test Laboratory: Audix SAR Lab

Date: 04/07/2026

CH38566(1911.6MHz Front)

DUT: LTE USB WIFI Stick Type: Wai-Link

Communication System: UID 0, Generic LTE (0); Communication System Band:

Band 39, E-UTRA/TDD (1880.0 - 1920.0 MHz); Frequency: 1911.6

MHz; Communication System PAR: 0 dB

Medium parameters used (extrapolated): $f = 1911.6 \text{ MHz}$; $\sigma = 1.482 \text{ S/m}$; $\epsilon_r = 39.592$;

$\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7957; ConvF(7.57, 7.74, 8.03) @ 1911.6 MHz; Calibrated: 2025/10/6
- Modulation Compensation:
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn899; Calibrated: 2026/6/25
- Phantom: Twin-SAM V4.0 (20deg probe tilt); Type: QD 000 P40 CC; Serial: xxxx
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Configuration/CH38566(1911.6MHz Front)/Area Scan (61x81x1):

Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.0371 W/kg

Configuration/CH38566(1911.6MHz Front)/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 1.078 V/m; Power Drift = 0.16 dB


Peak SAR (extrapolated) = 0.275 W/kg

SAR(1 g) = 0.027 W/kg; SAR(10 g) = 0.011 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid (> 16 mm)

Ratio of SAR at M2 to SAR at M1 = 30.5%

Maximum value of SAR (measured) = 0.0553 W/kg

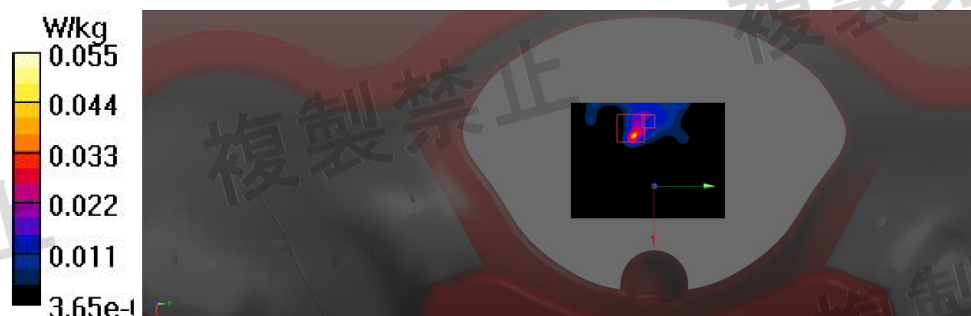

Test Laboratory: Audix SAR Lab

Date: 04/07/2026

CH38566(1911.6MHz Left)

DUT: LTE USB WIFI Stick Type: Wai-Link

Communication System: UID 0, Generic LTE (0); Communication System Band:

Band 39, E-UTRA/TDD (1880.0 - 1920.0 MHz); Frequency: 1911.6

MHz; Communication System PAR: 0 dB

Medium parameters used (extrapolated): $f = 1911.6$ MHz; $\sigma = 1.482$ S/m; $\epsilon_r = 39.592$;

$\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7957; ConvF(7.57, 7.74, 8.03) @ 1911.6 MHz; Calibrated: 2025/10/6
- Modulation Compensation:
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn899; Calibrated: 2026/6/25
- Phantom: Twin-SAM V4.0 (20deg probe tilt); Type: QD 000 P40 CC; Serial: xxxx
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Configuration/CH38566(1911.6MHz Left)/Area Scan (61x81x1):

Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.0416 W/kg

Configuration/CH38566(1911.6MHz Left)/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.562 V/m; Power Drift = 0.19 dB


Peak SAR (extrapolated) = 0.0520 W/kg

SAR(1 g) = 0.018 W/kg; SAR(10 g) = 0.00751 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid (> 16 mm)

Ratio of SAR at M2 to SAR at M1 = 47.2%

Maximum value of SAR (measured) = 0.0231 W/kg

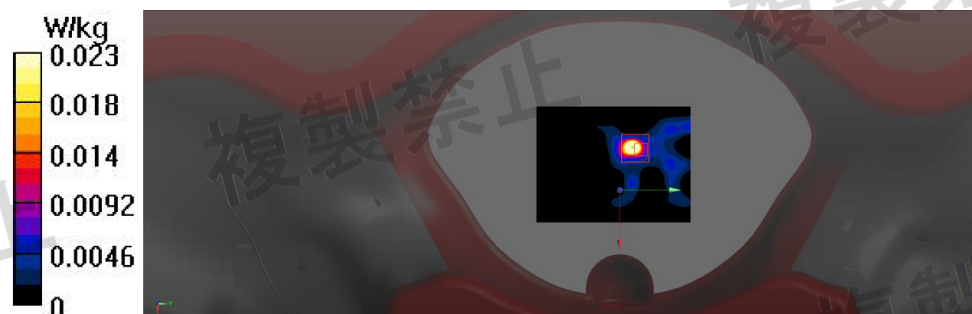

Test Laboratory: Audix SAR Lab

Date: 04/07/2026

CH38566(1911.6MHz Right)

DUT: LTE USB WIFI Stick Type: Wai-Link

Communication System: UID 0, Generic LTE (0); Communication System Band:

Band 39, E-UTRA/TDD (1880.0 - 1920.0 MHz); Frequency: 1911.6

MHz; Communication System PAR: 0 dB

Medium parameters used (extrapolated): $f = 1911.6$ MHz; $\sigma = 1.482$ S/m; $\epsilon_r = 39.592$;

$\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7957; ConvF(7.57, 7.74, 8.03) @ 1911.6 MHz; Calibrated: 2025/10/6
- Modulation Compensation:
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn899; Calibrated: 2026/6/25
- Phantom: Twin-SAM V4.0 (20deg probe tilt); Type: QD 000 P40 CC; Serial: xxxx
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Configuration/CH38566(1911.6MHz Right)/Area Scan (61x81x1):

Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.0236 W/kg

Configuration/CH38566(1911.6MHz Right)/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.044 V/m; Power Drift = -0.04 dB


Peak SAR (extrapolated) = 0.167 W/kg

SAR(1 g) = 0.019 W/kg; SAR(10 g) = 0.00649 W/kg

Smallest distance from peaks to all points 3 dB below = 9.6 mm

Ratio of SAR at M2 to SAR at M1 = 38.4%

Maximum value of SAR (measured) = 0.147 W/kg

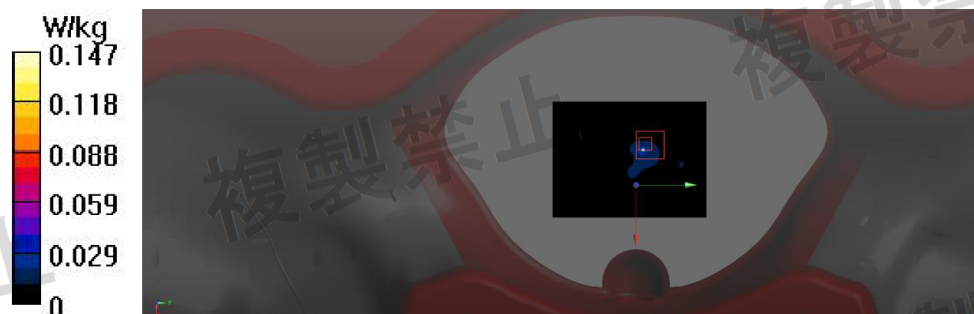

Test Laboratory: Audix SAR Lab

Date: 04/07/2026

CH38566(1911.6MHz Top)

DUT: LTE USB WIFI Stick Type: Wai-Link

Communication System: UID 0, Generic LTE (0); Communication System Band:

Band 39, E-UTRA/TDD (1880.0 - 1920.0 MHz); Frequency: 1911.6

MHz; Communication System PAR: 0 dB

Medium parameters used (extrapolated): $f = 1911.6$ MHz; $\sigma = 1.482$ S/m; $\epsilon_r = 39.592$;

$\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7957; ConvF(7.57, 7.74, 8.03) @ 1911.6 MHz; Calibrated: 2025/10/6
- Modulation Compensation:
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn899; Calibrated: 2026/6/25
- Phantom: Twin-SAM V4.0 (20deg probe tilt); Type: QD 000 P40 CC; Serial: xxxx
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Configuration/CH38566(1911.6MHz Top)/Area Scan (61x81x1):

Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.00321 W/kg

Configuration/CH38566(1911.6MHz Top)/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 0.7230 V/m; Power Drift = 0.13 dB


Peak SAR (extrapolated) = 0.00477 W/kg

SAR(1 g) = 0.000828 W/kg; SAR(10 g) = 0.000319 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid (> 16 mm)

Ratio of SAR at M2 to SAR at M1 = 41.2%

Maximum value of SAR (measured) = 0.00293 W/kg

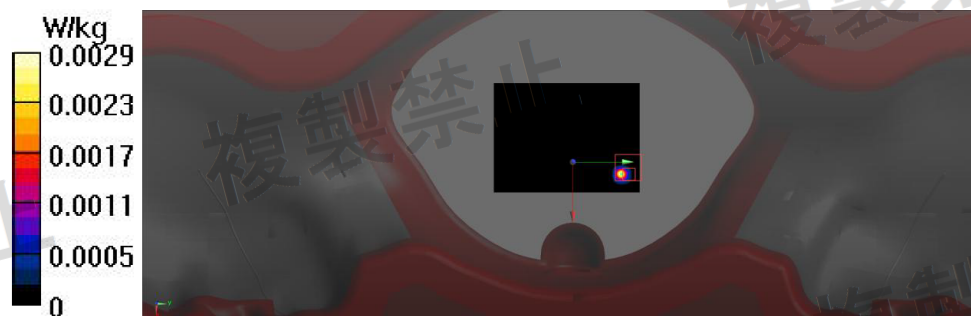

Test Mode: E-UTRA Band 40

Test Laboratory: Audix SAR Lab

Date: 05/07/2026

CH39250(2360MHz Back)

DUT: LTE USB WIFI Stick Type: Wai-Link

Communication System: UID 0, Generic LTE (0); Communication System Band:

Band 40, E-UTRA/TDD (2300.0 - 2400.0 MHz); Frequency: 2360

MHz; Communication System PAR: 0 dB

Medium parameters used: $f = 2400$ MHz; $\sigma = 1.826$ S/m; $\epsilon_r = 38.909$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7957; ConvF(7.23, 7.4, 7.67) @ 2360 MHz; Calibrated: 2025/10/6
- Modulation Compensation:
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn899; Calibrated: 2026/6/25
- Phantom: Twin-SAM V4.0 (20deg probe tilt); Type: QD 000 P40 CC; Serial: xxxx
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Configuration/CH39250(2360MHz Back)/Area Scan (61x81x1):

Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 0.0331 W/kg

Configuration/CH39250(2360MHz Back)/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 1.642 V/m; Power Drift = 0.16 dB


Peak SAR (extrapolated) = 0.0840 W/kg

SAR(1 g) = 0.029 W/kg; SAR(10 g) = 0.010 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid (> 16 mm)

Ratio of SAR at M2 to SAR at M1 = 44.6%

Maximum value of SAR (measured) = 0.0385 W/kg

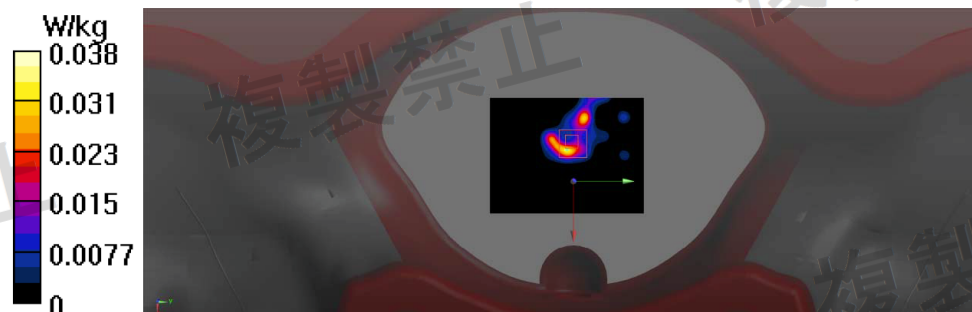

Test Laboratory: Audix SAR Lab

Date: 05/07/2026

CH39250(2360MHz Bottom)

DUT: LTE USB WIFI Stick Type: Wai-Link

Communication System: UID 0, Generic LTE (0); Communication System Band:

Band 40, E-UTRA/TDD (2300.0 - 2400.0 MHz); Frequency: 2360

MHz; Communication System PAR: 0 dB

Medium parameters used: $f = 2400$ MHz; $\sigma = 1.826$ S/m; $\epsilon_r = 38.909$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7957; ConvF(7.23, 7.4, 7.67) @ 2360 MHz; Calibrated: 2025/10/6
- Modulation Compensation:
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn899; Calibrated: 2026/6/25
- Phantom: Twin-SAM V4.0 (20deg probe tilt); Type: QD 000 P40 CC; Serial: xxxx
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Configuration/CH39250(2360MHz Bottom)/Area Scan (61x81x1):

Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 0.0321 W/kg

Configuration/CH39250(2360MHz Bottom)/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 3.191 V/m; Power Drift = 0.16 dB


Peak SAR (extrapolated) = 0.108 W/kg

SAR(1 g) = 0.025 W/kg; SAR(10 g) = 0.011 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid (> 16 mm)

Ratio of SAR at M2 to SAR at M1 = 52%

Maximum value of SAR (measured) = 0.0389 W/kg

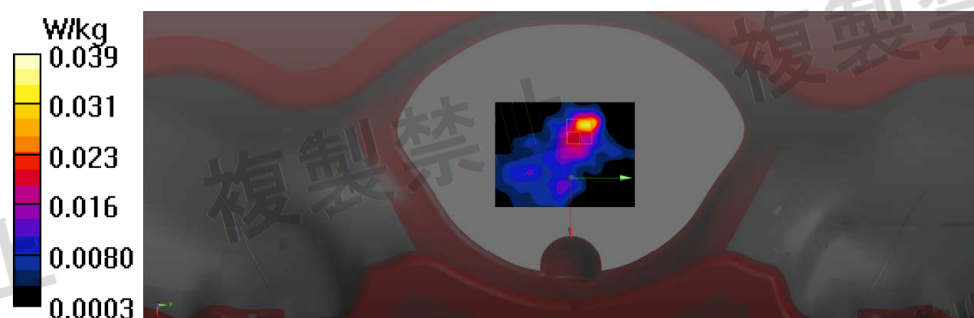

Test Laboratory: Audix SAR Lab

Date: 05/07/2026

CH39250(2360MHz Front)

DUT: LTE USB WIFI Stick Type: Wai-Link

Communication System: UID 0, Generic LTE (0); Communication System Band:

Band 40, E-UTRA/TDD (2300.0 - 2400.0 MHz); Frequency: 2360

MHz; Communication System PAR: 0 dB

Medium parameters used: $f = 2400$ MHz; $\sigma = 1.826$ S/m; $\epsilon_r = 38.909$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7957; ConvF(7.23, 7.4, 7.67) @ 2360 MHz; Calibrated: 2025/10/6
- Modulation Compensation:
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn899; Calibrated: 2026/6/25
- Phantom: Twin-SAM V4.0 (20deg probe tilt); Type: QD 000 P40 CC; Serial: xxxx
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Configuration/CH39250(2360MHz Front)/Area Scan (61x81x1):

Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 0.0932 W/kg

Configuration/CH39250(2360MHz Front)/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 3.130 V/m; Power Drift = 0.12 dB


Peak SAR (extrapolated) = 0.152 W/kg

SAR(1 g) = 0.035 W/kg; SAR(10 g) = 0.013 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid (> 16 mm)

Ratio of SAR at M2 to SAR at M1 = 48.3%

Maximum value of SAR (measured) = 0.0622 W/kg

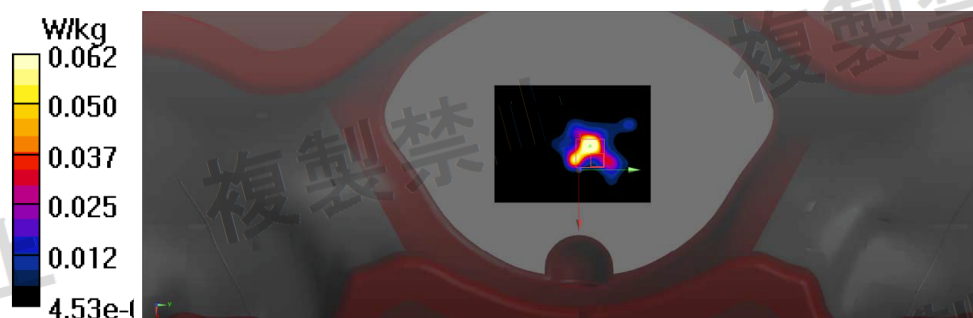

Test Laboratory: Audix SAR Lab

Date: 05/07/2026

CH39250(2360MHz Left)

DUT: LTE USB WIFI Stick Type: Wai-Link

Communication System: UID 0, Generic LTE (0); Communication System Band:

Band 40, E-UTRA/TDD (2300.0 - 2400.0 MHz); Frequency: 2360

MHz; Communication System PAR: 0 dB

Medium parameters used: $f = 2400$ MHz; $\sigma = 1.826$ S/m; $\epsilon_r = 38.909$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7957; ConvF(7.23, 7.4, 7.67) @ 2360 MHz; Calibrated: 2025/10/6
- Modulation Compensation:
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn899; Calibrated: 2026/6/25
- Phantom: Twin-SAM V4.0 (20deg probe tilt); Type: QD 000 P40 CC; Serial: xxxx
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Configuration/CH39250(2360MHz Left)/Area Scan (61x81x1):

Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 0.0241 W/kg

Configuration/CH39250(2360MHz Left)/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 1.226 V/m; Power Drift = 0.15 dB


Peak SAR (extrapolated) = 0.0590 W/kg

SAR(1 g) = 0.014 W/kg; SAR(10 g) = 0.00532 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid (> 16 mm)

Ratio of SAR at M2 to SAR at M1 = 47.5%

Maximum value of SAR (measured) = 0.0312 W/kg

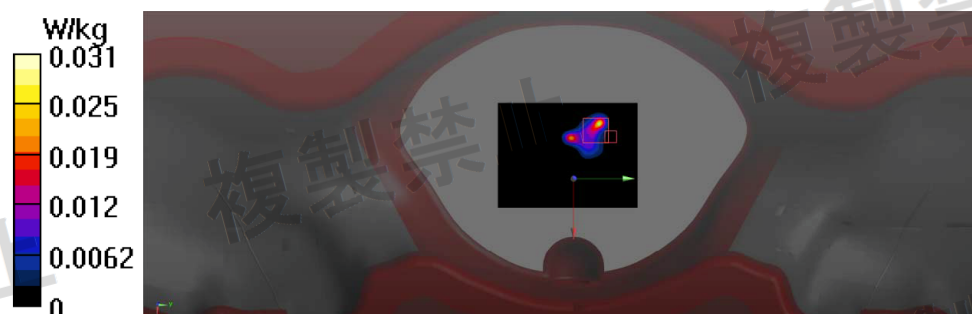

Test Laboratory: Audix SAR Lab

Date: 05/07/2026

CH39250(2360MHz Right)

DUT: LTE USB WIFI Stick Type: Wai-Link

Communication System: UID 0, Generic LTE (0); Communication System Band:

Band 40, E-UTRA/TDD (2300.0 - 2400.0 MHz); Frequency: 2360

MHz; Communication System PAR: 0 dB

Medium parameters used: $f = 2400$ MHz; $\sigma = 1.826$ S/m; $\epsilon_r = 38.909$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7957; ConvF(7.23, 7.4, 7.67) @ 2360 MHz; Calibrated: 2025/10/6
- Modulation Compensation:
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn899; Calibrated: 2026/6/25
- Phantom: Twin-SAM V4.0 (20deg probe tilt); Type: QD 000 P40 CC; Serial: xxxx
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Configuration/CH39250(2360MHz Right)/Area Scan (61x81x1):

Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 0.229 W/kg

Configuration/CH39250(2360MHz Right)/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 9.258 V/m; Power Drift = -0.18 dB


Peak SAR (extrapolated) = 0.431 W/kg

SAR(1 g) = 0.192 W/kg; SAR(10 g) = 0.091 W/kg

Smallest distance from peaks to all points 3 dB below = 10.2 mm

Ratio of SAR at M2 to SAR at M1 = 48.6%

Maximum value of SAR (measured) = 0.221 W/kg

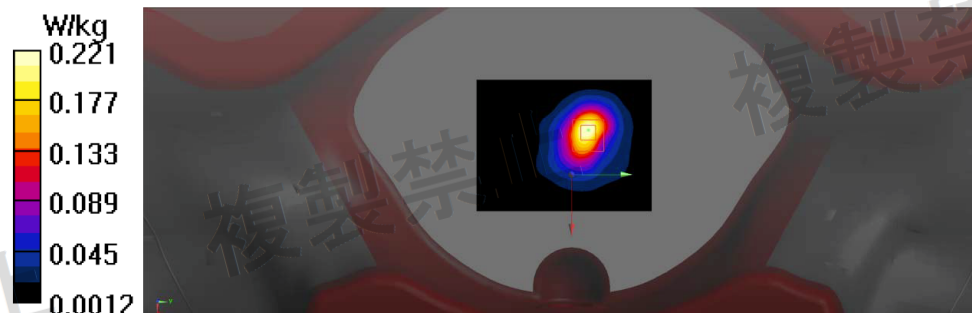

Test Laboratory: Audix SAR Lab

Date: 05/07/2026

CH39250(2360MHz Top)

DUT: LTE USB WIFI Stick Type: Wai-Link

Communication System: UID 0, Generic LTE (0); Communication System Band:

Band 40, E-UTRA/TDD (2300.0 - 2400.0 MHz); Frequency: 2360

MHz; Communication System PAR: 0 dB

Medium parameters used: $f = 2400$ MHz; $\sigma = 1.826$ S/m; $\epsilon_r = 38.909$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7957; ConvF(7.23, 7.4, 7.67) @ 2360 MHz; Calibrated: 2025/10/6
- Modulation Compensation:
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn899; Calibrated: 2026/6/25
- Phantom: Twin-SAM V4.0 (20deg probe tilt); Type: QD 000 P40 CC; Serial: xxxx
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Configuration/CH39250(2360MHz Top)/Area Scan (61x81x1):

Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 0.0173 W/kg

Configuration/CH39250(2360MHz Top)/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 2.192 V/m; Power Drift = -0.16 dB


Peak SAR (extrapolated) = 0.0190 W/kg

SAR(1 g) = 0.00499 W/kg; SAR(10 g) = 0.00289 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid (> 16 mm)

Ratio of SAR at M2 to SAR at M1 = 56.9%

Maximum value of SAR (measured) = 0.00532 W/kg

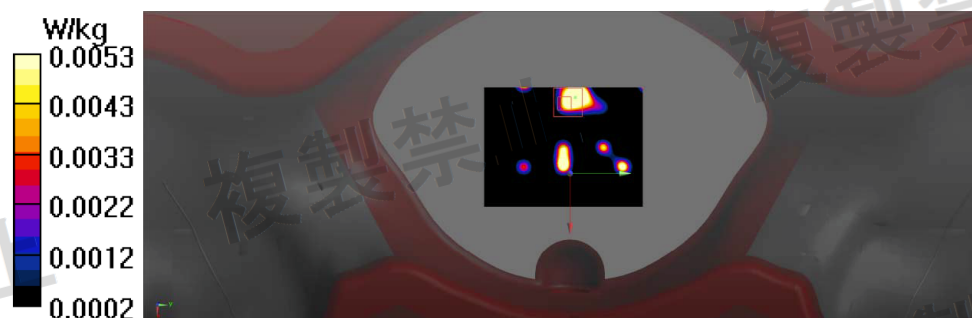

Test Mode: E-UTRA Band 41

Test Laboratory: Audix SAR Lab

Date: 06/07/2026

CH40690(2600MHz Back)

DUT: LTE USB WIFI Stick Type: Wai-Link

Communication System: UID 0, Generic LTE (0); Communication System Band:

Band 41, E-UTRA/TDD (2496.0 - 2690.0 MHz); Frequency: 2600

MHz; Communication System PAR: 0 dB

Medium parameters used: $f = 2600$ MHz; $\sigma = 2.06$ S/m; $\epsilon_r = 38$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7957; ConvF(7.17, 7.33, 7.6) @ 2600 MHz; Calibrated: 2025/10/6
- Modulation Compensation:
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn899; Calibrated: 2026/6/25
- Phantom: Twin-SAM V4.0 (20deg probe tilt); Type: QD 000 P40 CC; Serial: xxxxx
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Configuration/CH40690(2600MHz Back)/Area Scan (61x81x1):

Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 0.107 W/kg

Configuration/CH40690(2600MHz Back)/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 4.860 V/m; Power Drift = 0.13 dB


Peak SAR (extrapolated) = 0.316 W/kg

SAR(1 g) = 0.068 W/kg; SAR(10 g) = 0.034 W/kg

Smallest distance from peaks to all points 3 dB below = 10.5 mm

Ratio of SAR at M2 to SAR at M1 = 45.3%

Maximum value of SAR (measured) = 0.137 W/kg

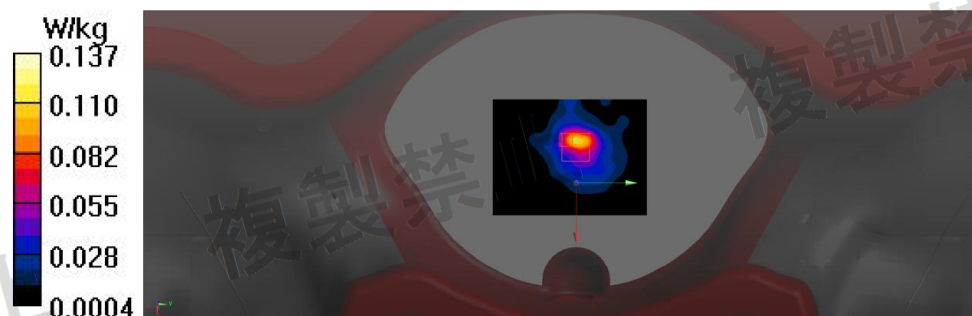

Test Laboratory: Audix SAR Lab

Date: 06/07/2026

CH40690(2600MHz Bottom)

DUT: LTE USB WIFI Stick Type: Wai-Link

Communication System: UID 0, Generic LTE (0); Communication System Band:

Band 41, E-UTRA/TDD (2496.0 - 2690.0 MHz); Frequency: 2600

MHz; Communication System PAR: 0 dB

Medium parameters used: $f = 2600$ MHz; $\sigma = 2.06$ S/m; $\epsilon_r = 38$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7957; ConvF(7.17, 7.33, 7.6) @ 2600 MHz; Calibrated: 2025/10/6
- Modulation Compensation:
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn899; Calibrated: 2026/6/25
- Phantom: Twin-SAM V4.0 (20deg probe tilt); Type: QD 000 P40 CC; Serial: xxxx
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Configuration/CH40690(2600MHz Bottom)/Area Scan (61x81x1):

Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 0.0261 W/kg

Configuration/CH40690(2600MHz Bottom)/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 2.874 V/m; Power Drift = 0.09 dB


Peak SAR (extrapolated) = 0.113 W/kg

SAR(1 g) = 0.039 W/kg; SAR(10 g) = 0.016 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid (> 16 mm)

Ratio of SAR at M2 to SAR at M1 = 42.2%

Maximum value of SAR (measured) = 0.0458 W/kg

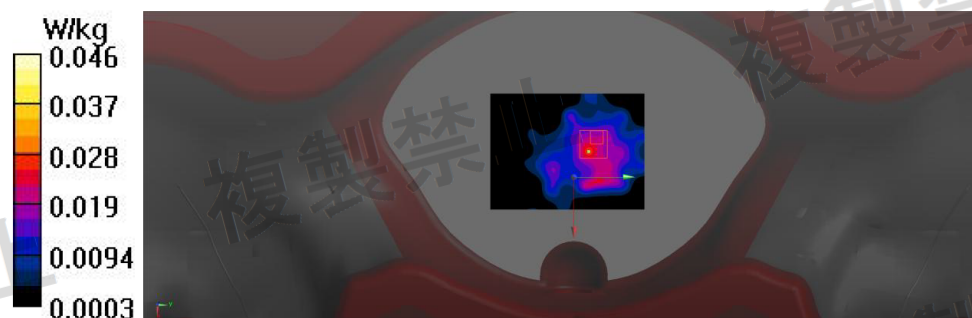

Test Laboratory: Audix SAR Lab

Date: 06/07/2026

CH40690(2600MHz Front)

DUT: LTE USB WIFI Stick Type: Wai-Link

Communication System: UID 0, Generic LTE (0); Communication System Band:

Band 41, E-UTRA/TDD (2496.0 - 2690.0 MHz); Frequency: 2600

MHz; Communication System PAR: 0 dB

Medium parameters used: $f = 2600$ MHz; $\sigma = 2.06$ S/m; $\epsilon_r = 38$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7957; ConvF(7.17, 7.33, 7.6) @ 2600 MHz; Calibrated: 2025/10/6
- Modulation Compensation:
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn899; Calibrated: 2026/6/25
- Phantom: Twin-SAM V4.0 (20deg probe tilt); Type: QD 000 P40 CC; Serial: xxxx
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Configuration/CH40690(2600MHz Front)/Area Scan (61x81x1):

Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 0.0619 W/kg

Configuration/CH40690(2600MHz Front)/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 5.714 V/m; Power Drift = 0.06 dB


Peak SAR (extrapolated) = 0.202 W/kg

SAR(1 g) = 0.026 W/kg; SAR(10 g) = 0.013 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid (> 16 mm)

Ratio of SAR at M2 to SAR at M1 = 47.4%

Maximum value of SAR (measured) = 0.0688 W/kg

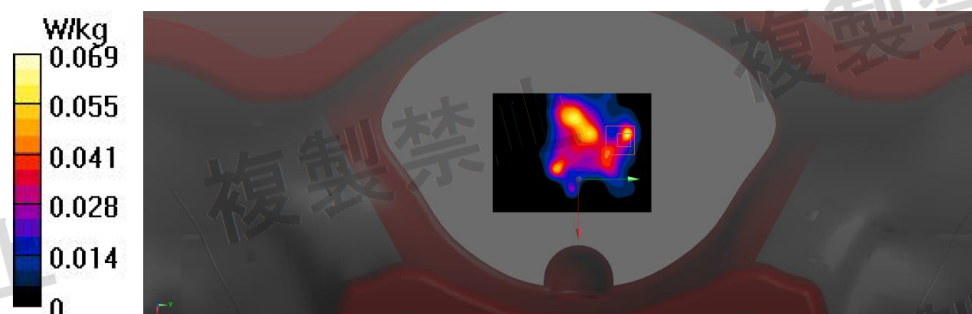

Test Laboratory: Audix SAR Lab

Date: 06/07/2026

CH40690(2600MHz Left)

DUT: LTE USB WIFI Stick Type: Wai-Link

Communication System: UID 0, Generic LTE (0); Communication System Band:

Band 41, E-UTRA/TDD (2496.0 - 2690.0 MHz); Frequency: 2600

MHz; Communication System PAR: 0 dB

Medium parameters used: $f = 2600$ MHz; $\sigma = 2.06$ S/m; $\epsilon_r = 38$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7957; ConvF(7.17, 7.33, 7.6) @ 2600 MHz; Calibrated: 2025/10/6
- Modulation Compensation:
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn899; Calibrated: 2026/6/25
- Phantom: Twin-SAM V4.0 (20deg probe tilt); Type: QD 000 P40 CC; Serial: xxxx
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Configuration/CH40690(2600MHz Left)/Area Scan (61x81x1):

Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 0.0313 W/kg

Configuration/CH40690(2600MHz Left)/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 2.233 V/m; Power Drift = 0.14 dB


Peak SAR (extrapolated) = 0.131 W/kg

SAR(1 g) = 0.040 W/kg; SAR(10 g) = 0.016 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid (> 16 mm)

Ratio of SAR at M2 to SAR at M1 = 46%

Maximum value of SAR (measured) = 0.0703 W/kg

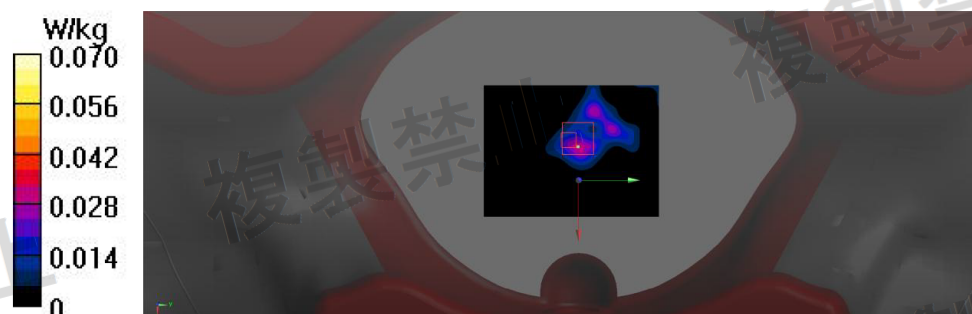

Test Laboratory: Audix SAR Lab

Date: 06/07/2026

CH40690(2600MHz Right)

DUT: LTE USB WIFI Stick Type: Wai-Link

Communication System: UID 0, Generic LTE (0); Communication System Band:

Band 41, E-UTRA/TDD (2496.0 - 2690.0 MHz); Frequency: 2600

MHz; Communication System PAR: 0 dB

Medium parameters used: $f = 2600$ MHz; $\sigma = 2.06$ S/m; $\epsilon_r = 38$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7957; ConvF(7.17, 7.33, 7.6) @ 2600 MHz; Calibrated: 2025/10/6
- Modulation Compensation:
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn899; Calibrated: 2026/6/25
- Phantom: Twin-SAM V4.0 (20deg probe tilt); Type: QD 000 P40 CC; Serial: xxxx
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Configuration/CH40690(2600MHz Right)/Area Scan (61x81x1):

Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 0.149 W/kg

Configuration/CH40690(2600MHz Right)/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 8.189 V/m; Power Drift = 0.01 dB


Peak SAR (extrapolated) = 0.254 W/kg

SAR(1 g) = 0.123 W/kg; SAR(10 g) = 0.062 W/kg

Smallest distance from peaks to all points 3 dB below = 17.6 mm

Ratio of SAR at M2 to SAR at M1 = 46.9%

Maximum value of SAR (measured) = 0.134 W/kg

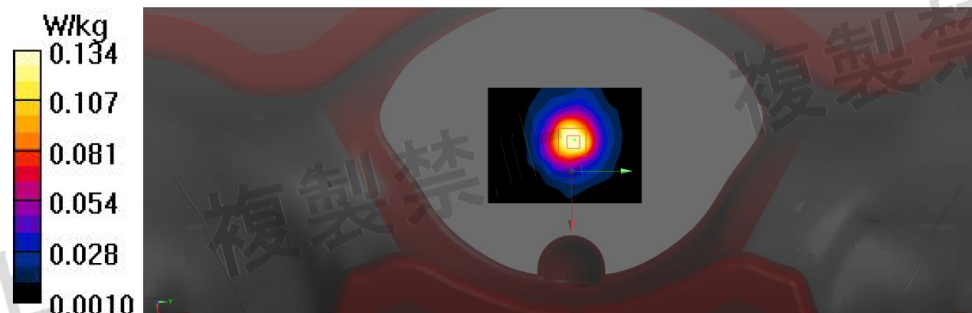

Test Laboratory: Audix SAR Lab

Date: 06/07/2026

CH40690(2600MHz Top)

DUT: LTE USB WIFI Stick Type: Wai-Link

Communication System: UID 0, Generic LTE (0); Communication System Band:

Band 41, E-UTRA/TDD (2496.0 - 2690.0 MHz); Frequency: 2600

MHz; Communication System PAR: 0 dB

Medium parameters used: $f = 2600$ MHz; $\sigma = 2.06$ S/m; $\epsilon_r = 38$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7957; ConvF(7.17, 7.33, 7.6) @ 2600 MHz; Calibrated: 2025/10/6
- Modulation Compensation:
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn899; Calibrated: 2026/6/25
- Phantom: Twin-SAM V4.0 (20deg probe tilt); Type: QD 000 P40 CC; Serial: xxxx
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Configuration/CH40690(2600MHz Top)/Area Scan (61x81x1):

Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 0.0422 W/kg

Configuration/CH40690(2600MHz Top)/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 2.891 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 0.0670 W/kg

SAR(1 g) = 0.022 W/kg; SAR(10 g) = 0.012 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid (> 16 mm)

Ratio of SAR at M2 to SAR at M1 = 43.7%

Maximum value of SAR (measured) = 0.0275 W/kg

