


Site: AC1	Time: 2020/04/21 - 17:28
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE80 at Channel 5530MHz with OAW-AP1321	

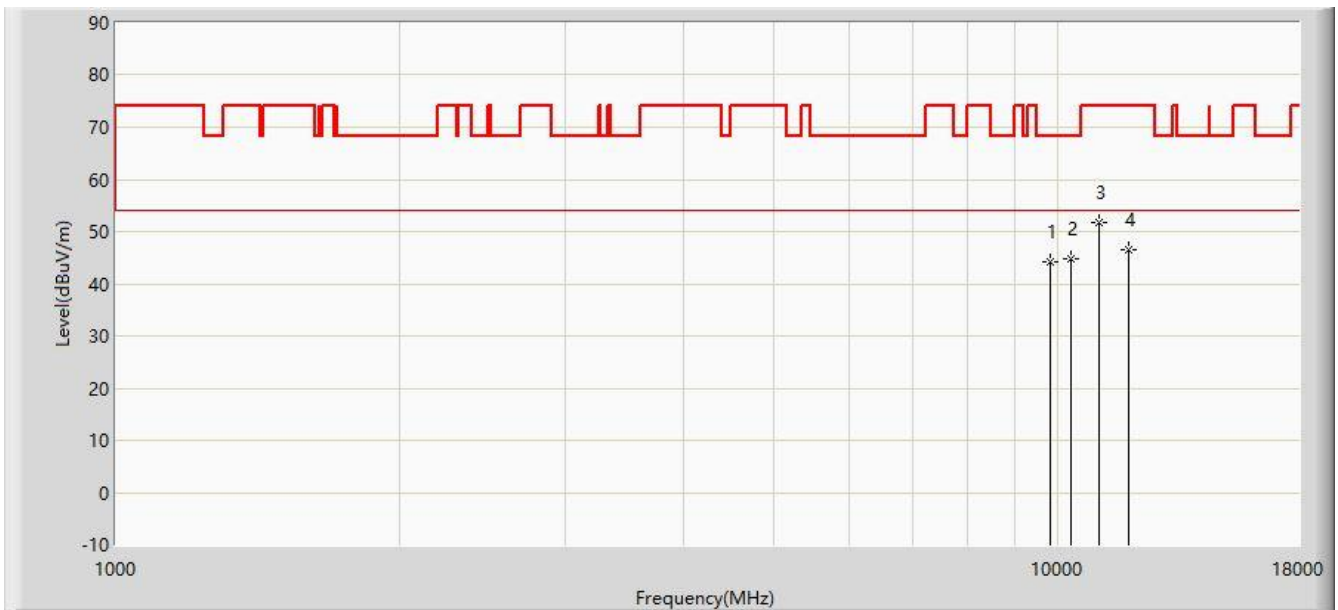


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			9814.500	44.237	29.585	-23.963	68.200	14.652	PK
2			10324.500	44.859	28.554	-23.341	68.200	16.305	PK
3		*	11064.000	51.704	34.063	-22.296	74.000	17.641	PK
4			11863.000	46.492	28.609	-27.508	74.000	17.883	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/21 - 17:28
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE80 at Channel 5530MHz with OAW-AP1321	

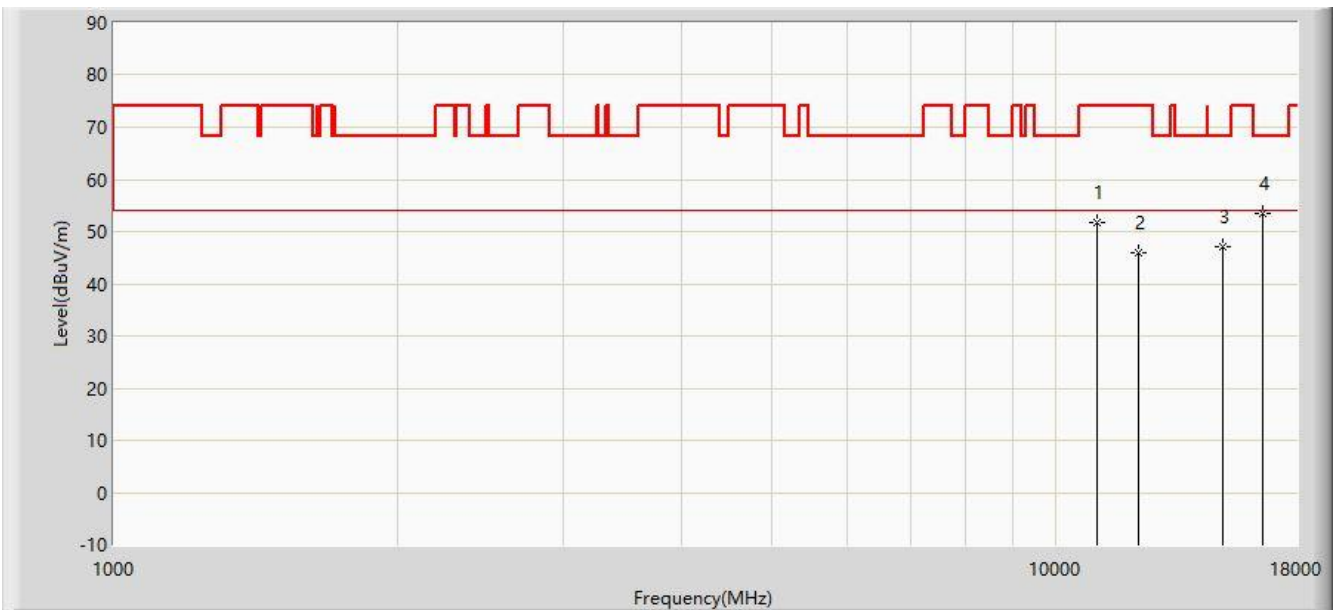


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			11055.500	51.701	34.069	-22.299	74.000	17.632	PK
2			12220.000	46.071	28.257	-27.929	74.000	17.814	PK
3			15016.500	47.217	26.422	-20.983	68.200	20.795	PK
4		*	16563.500	53.376	30.965	-14.824	68.200	22.411	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/21 - 17:28
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE80 at Channel 5610MHz with OAW-AP1321	

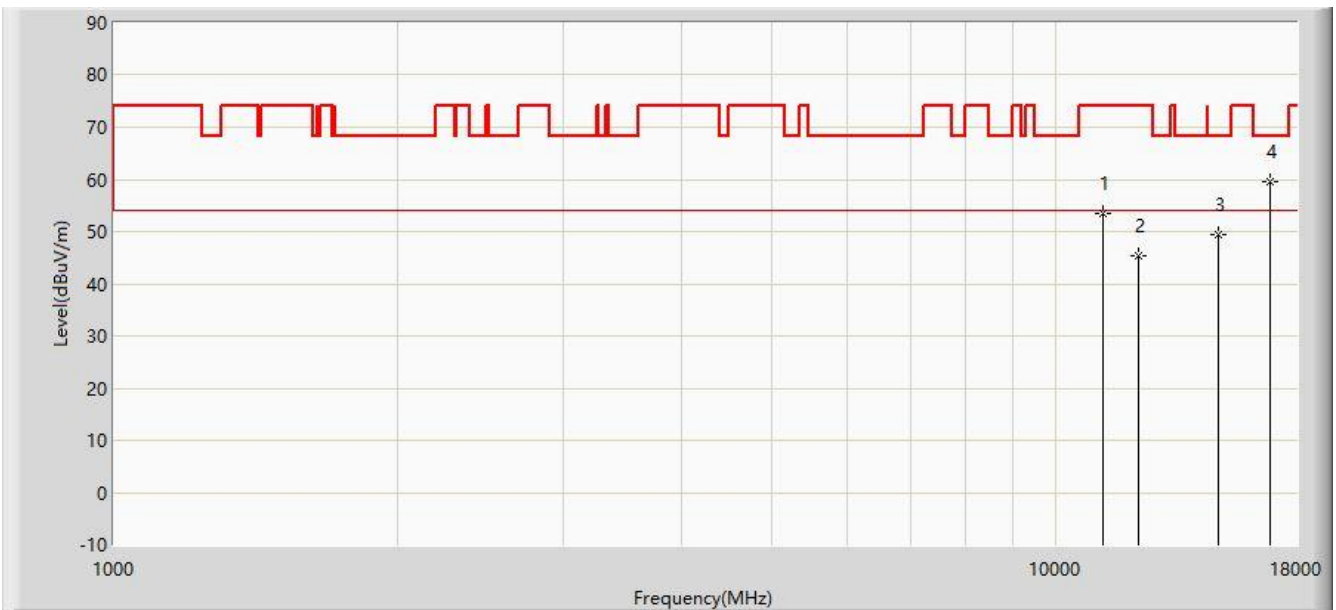


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			11200.000	53.547	35.779	-20.453	74.000	17.768	PK
2			12220.000	45.400	27.586	-28.600	74.000	17.814	PK
3			14863.500	49.479	28.726	-18.721	68.200	20.752	PK
4		*	16861.000	59.680	35.157	-8.520	68.200	24.523	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/21 - 17:28
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE80 at Channel 5610MHz with OAW-AP1321	

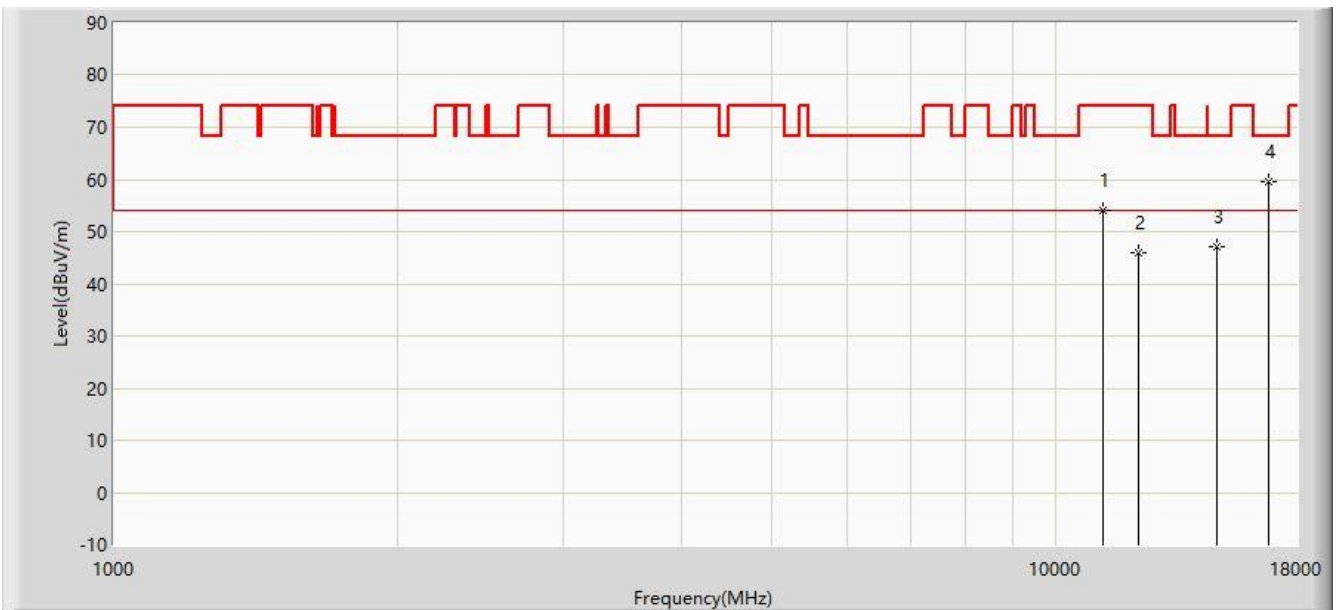


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			11225.500	54.166	36.374	-19.834	74.000	17.792	PK
2			12220.000	45.809	27.995	-28.191	74.000	17.814	PK
3			14812.500	47.118	26.378	-21.082	68.200	20.739	PK
4		*	16827.000	59.424	35.142	-8.776	68.200	24.282	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/21 - 17:29
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE80 at Channel 5690MHz with OAW-AP1321	

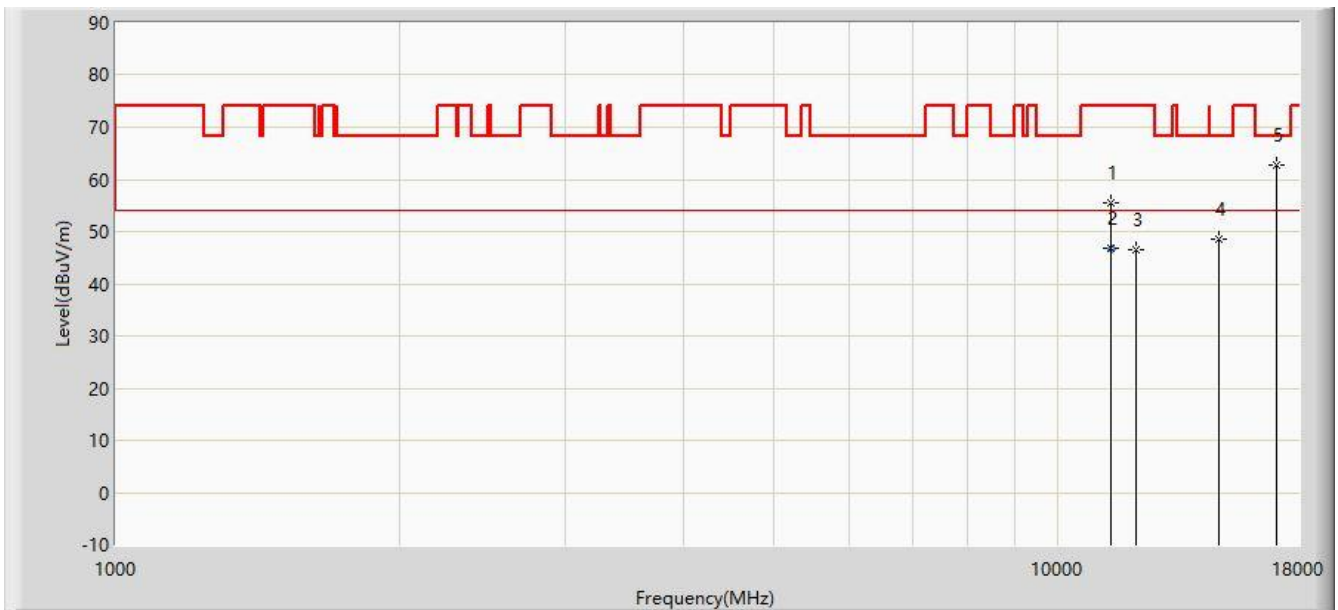


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			11370.000	55.516	37.588	-18.484	74.000	17.928	PK
2			11396.200	46.688	28.735	-7.312	54.000	17.953	AV
3			12109.500	46.422	28.606	-27.578	74.000	17.816	PK
4			14812.500	48.678	27.938	-19.522	68.200	20.739	PK
5		*	17056.500	62.795	36.750	-5.405	68.200	26.045	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/21 - 17:29
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE80 at Channel 5690MHz with OAW-AP1321	

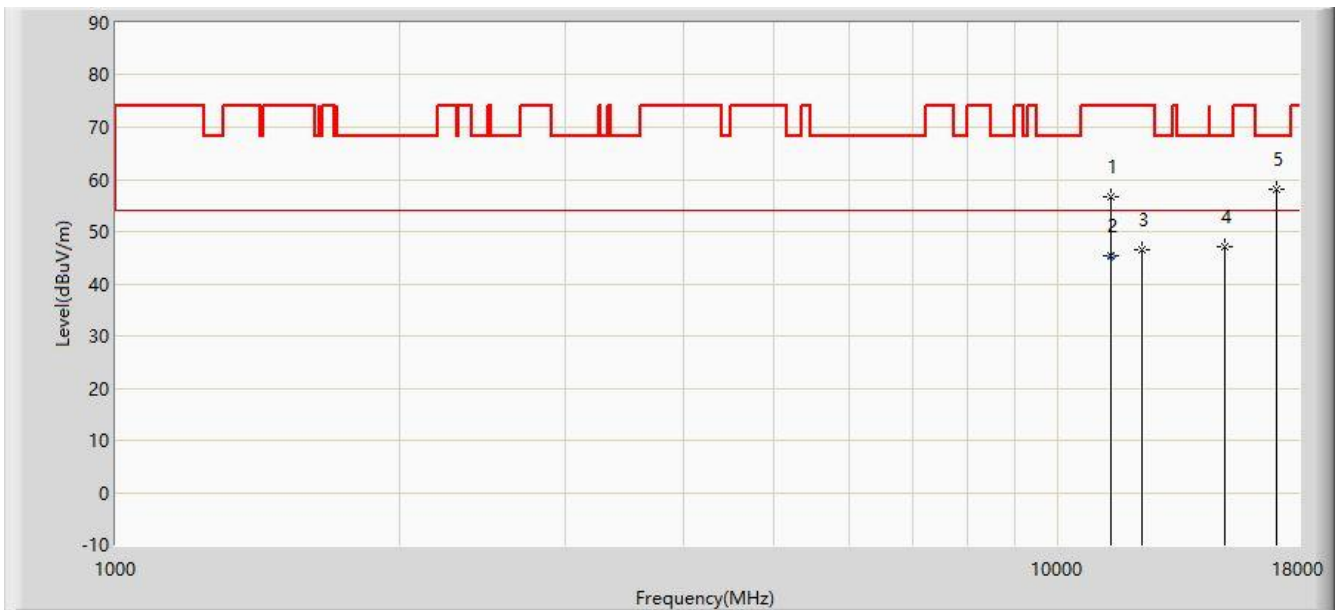


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			11378.500	56.571	38.635	-17.429	74.000	17.936	PK
2		*	11380.000	45.372	27.435	-8.628	54.000	17.937	AV
3			12254.000	46.466	28.653	-27.534	74.000	17.813	PK
4			15033.500	46.958	26.157	-21.242	68.200	20.800	PK
5			17048.000	57.998	32.033	-10.202	68.200	25.965	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/21 - 17:29
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE80 at Channel 5775MHz with OAW-AP1321	

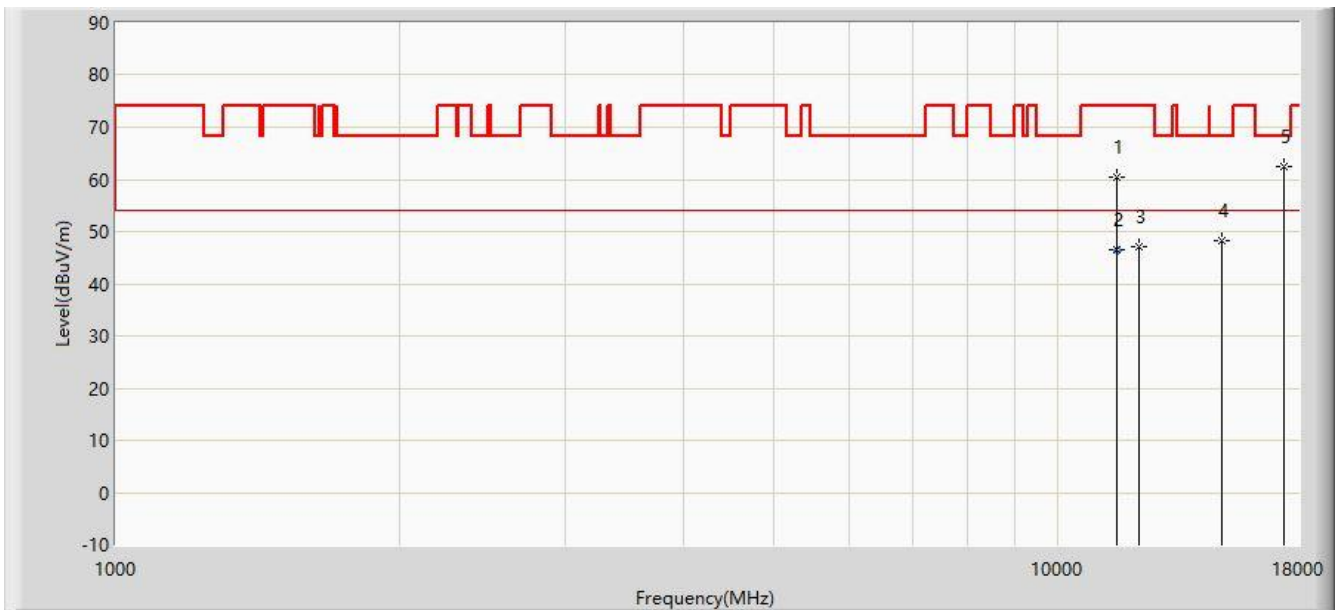


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			11548.500	60.340	42.312	-13.660	74.000	18.027	PK
2			11550.400	46.530	28.503	-7.470	54.000	18.026	AV
3			12177.500	47.198	29.383	-26.802	74.000	17.814	PK
4			14897.500	48.367	27.605	-19.833	68.200	20.763	PK
5		*	17354.000	62.520	33.662	-5.680	68.200	28.858	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/21 - 17:29
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE80 at Channel 5775MHz with OAW-AP1321	

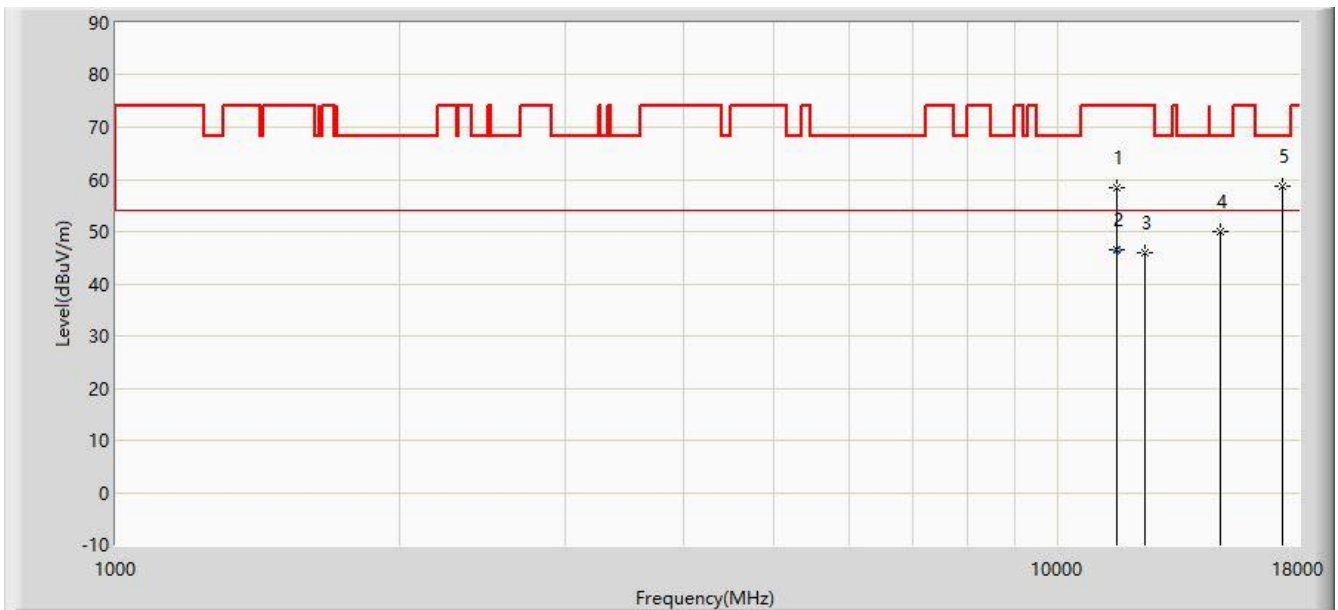


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			11540.000	58.536	40.504	-15.464	74.000	18.032	PK
2		*	11542.100	46.558	28.527	-7.442	54.000	18.031	AV
3			12356.000	46.061	28.252	-27.939	74.000	17.809	PK
4			14863.500	49.995	29.242	-18.205	68.200	20.752	PK
5			17303.000	58.682	30.306	-9.518	68.200	28.376	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/21 - 17:29
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE80+80 at Channel 5210MHz+5290MHz with OAW-AP1321	

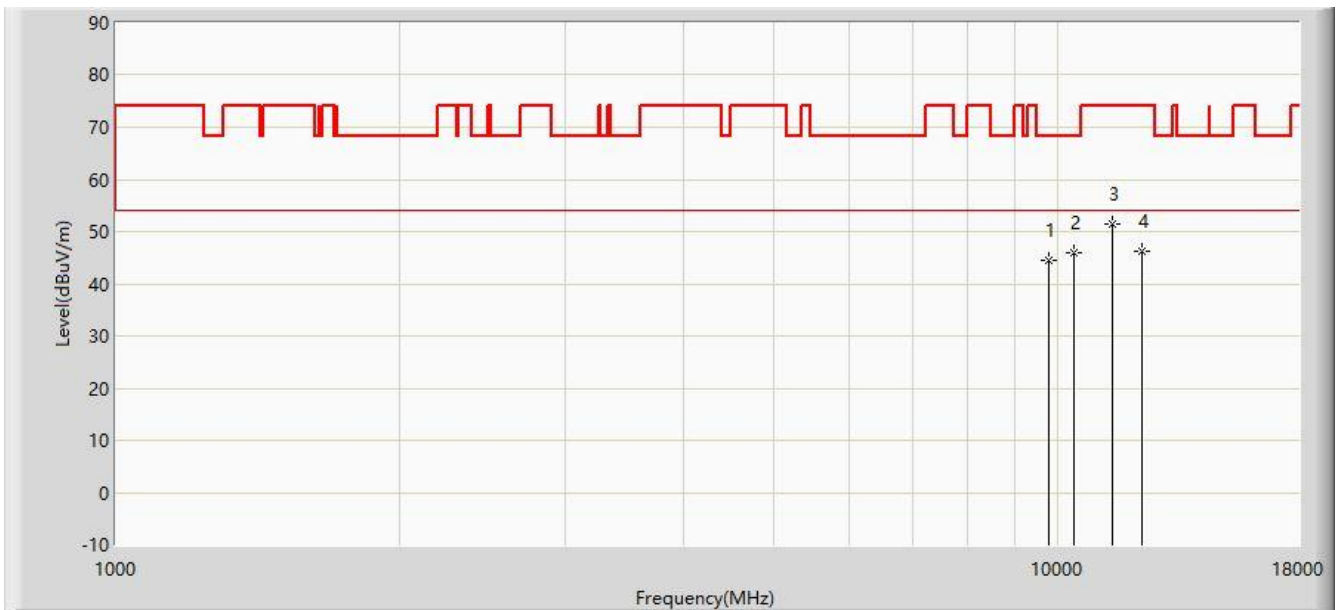


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			9780.500	44.634	30.094	-23.566	68.200	14.540	PK
2		*	10375.500	45.876	29.407	-22.324	68.200	16.470	PK
3			11404.000	51.550	33.590	-22.450	74.000	17.960	PK
4			12254.000	46.126	28.313	-27.874	74.000	17.813	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/21 - 17:29
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE80+80 at Channel 5210MHz+5290MHz with OAW-AP1321	

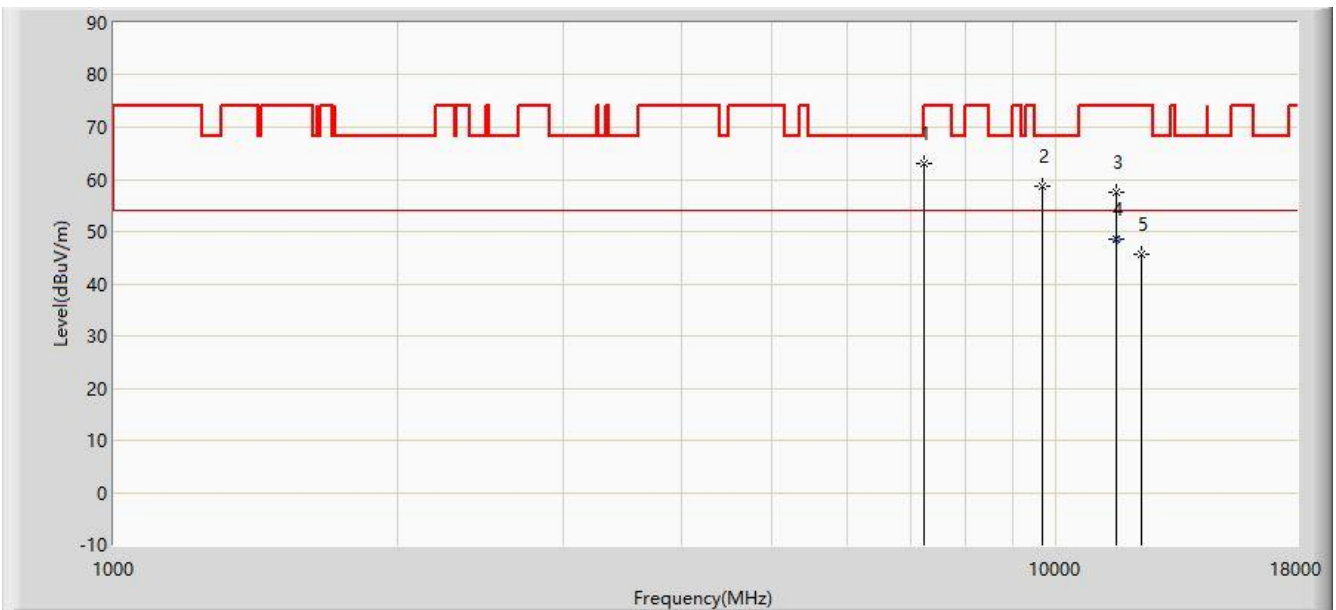


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	7230.500	63.039	51.925	-5.161	68.200	11.114	PK
2			9653.000	58.614	44.492	-9.586	68.200	14.122	PK
3			11565.500	57.574	39.554	-16.426	74.000	18.020	PK
4			11569.000	48.656	30.638	-5.344	54.000	18.018	AV
5			12330.500	45.666	27.856	-28.334	74.000	17.810	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/21 - 17:29
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE80+80 at Channel 5530MHz +5610MHz with OAW-AP1321	

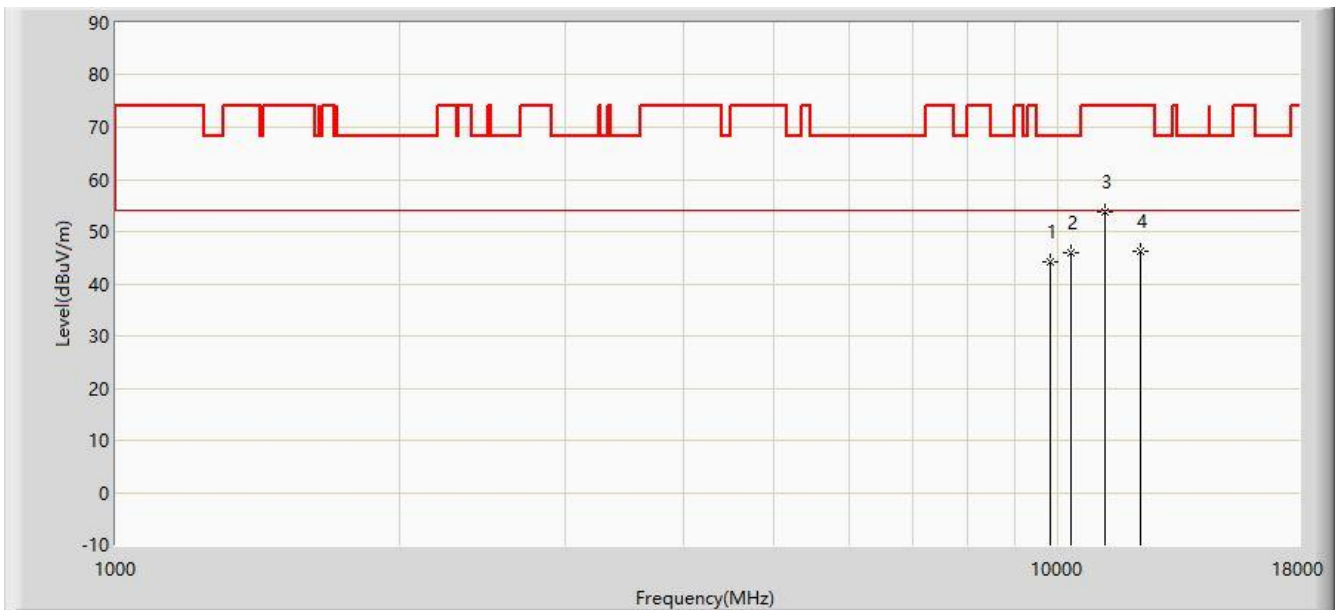


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			9797.500	44.231	29.635	-23.969	68.200	14.597	PK
2			10333.000	45.806	29.473	-22.394	68.200	16.333	PK
3		*	11217.000	53.885	36.101	-20.115	74.000	17.784	PK
4			12237.000	46.303	28.490	-27.697	74.000	17.813	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/21 - 17:29
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE80+80 at Channel 5530MHz +5610MHz with OAW-AP1321	

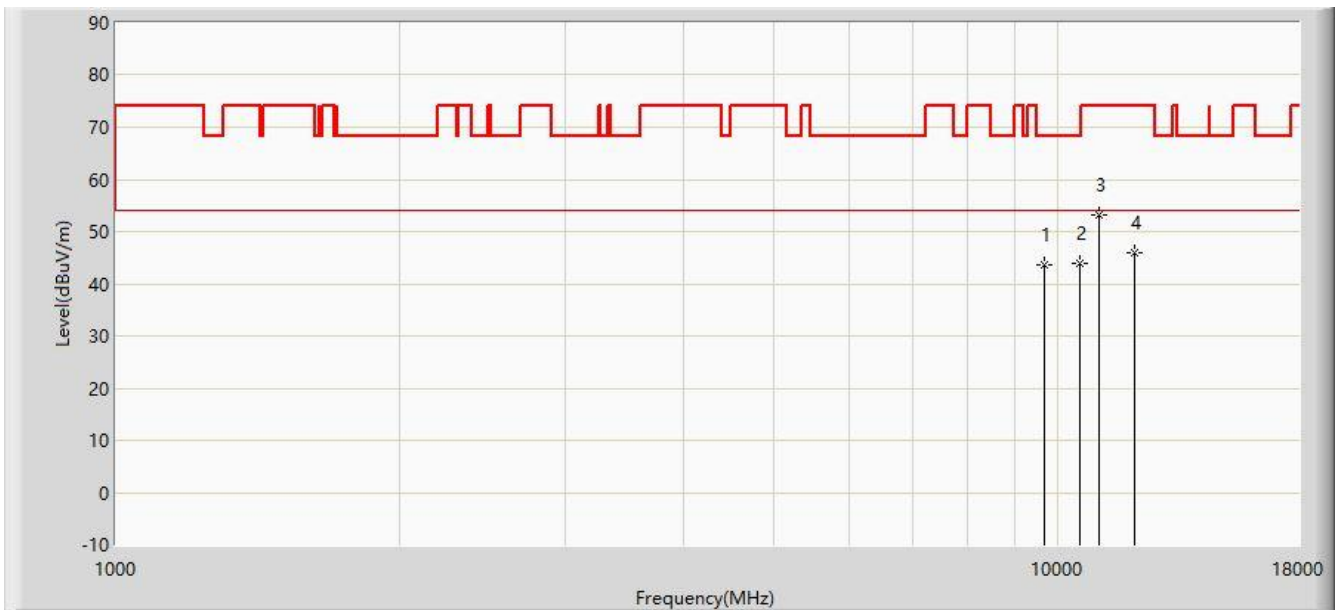


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			9678.500	43.700	29.495	-24.500	68.200	14.205	PK
2			10537.000	44.047	27.124	-24.153	68.200	16.923	PK
3		*	11064.000	53.080	35.439	-20.920	74.000	17.641	PK
4			12058.500	45.933	28.115	-28.067	74.000	17.818	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

無線基地台-OAW-AP1321-Scan Antenna

Site: AC1	Time: 2020/04/21 - 11:37
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11a at Channel 5180MHz with OAW-AP1321-Scan Antenna	

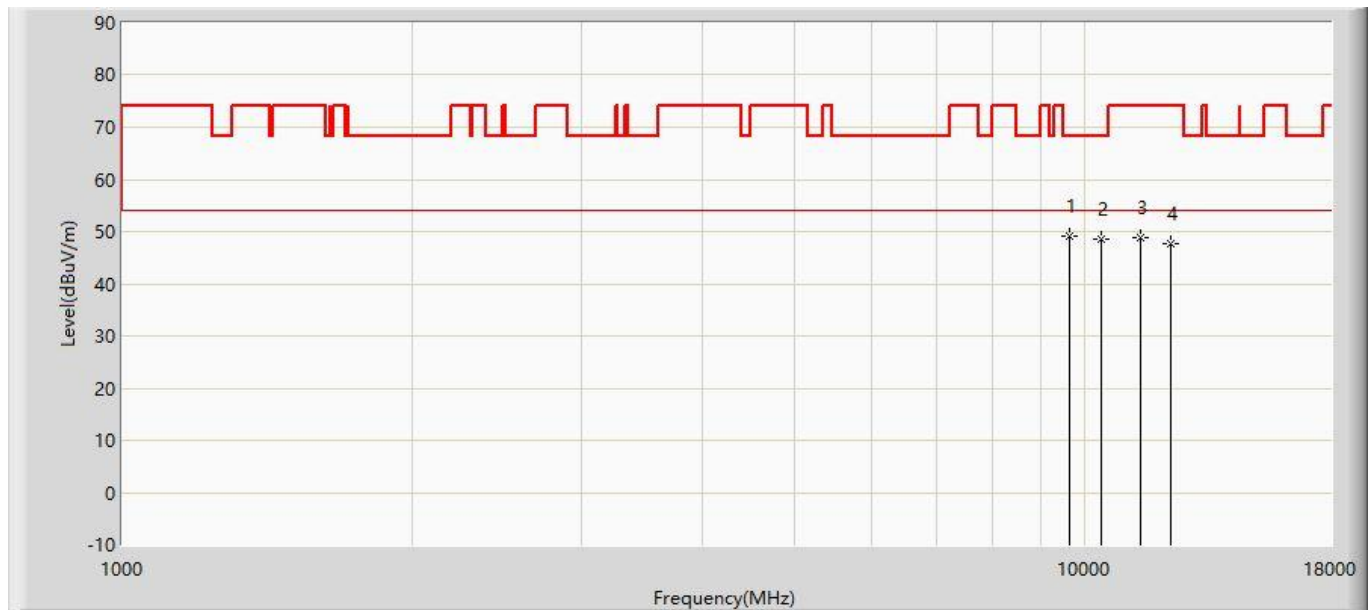


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	9644.500	49.235	35.141	-18.965	68.200	14.094	PK
2			10409.500	48.419	31.840	-19.781	68.200	16.579	PK
3			11404.000	48.735	30.775	-25.265	74.000	17.960	PK
4			12288.000	47.780	29.969	-26.220	74.000	17.811	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/21 - 11:37
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11a at Channel 5180MHz with OAW-AP1321-Scan Antenna	

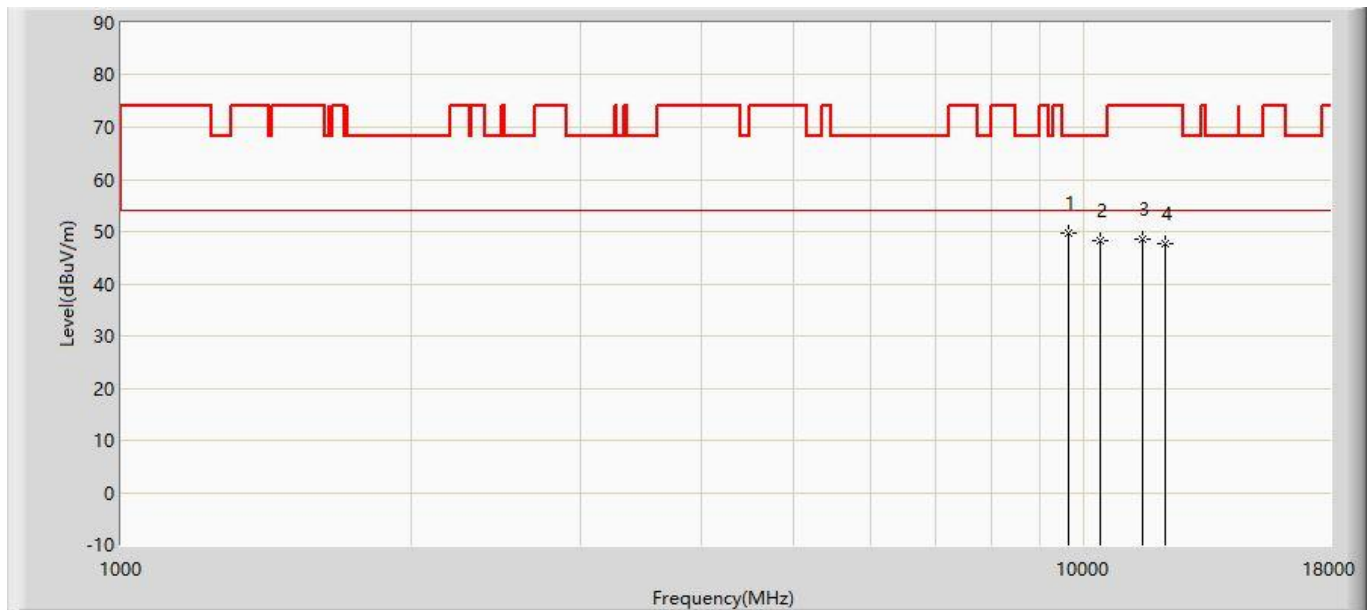


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	9644.500	49.658	35.564	-18.542	68.200	14.094	PK
2			10409.500	48.277	31.698	-19.923	68.200	16.579	PK
3			11497.500	48.612	30.569	-25.388	74.000	18.043	PK
4			12126.500	47.759	29.943	-26.241	74.000	17.817	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/21 - 11:38
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11a at Channel 5220MHz with OAW-AP1321-Scan Antenna	

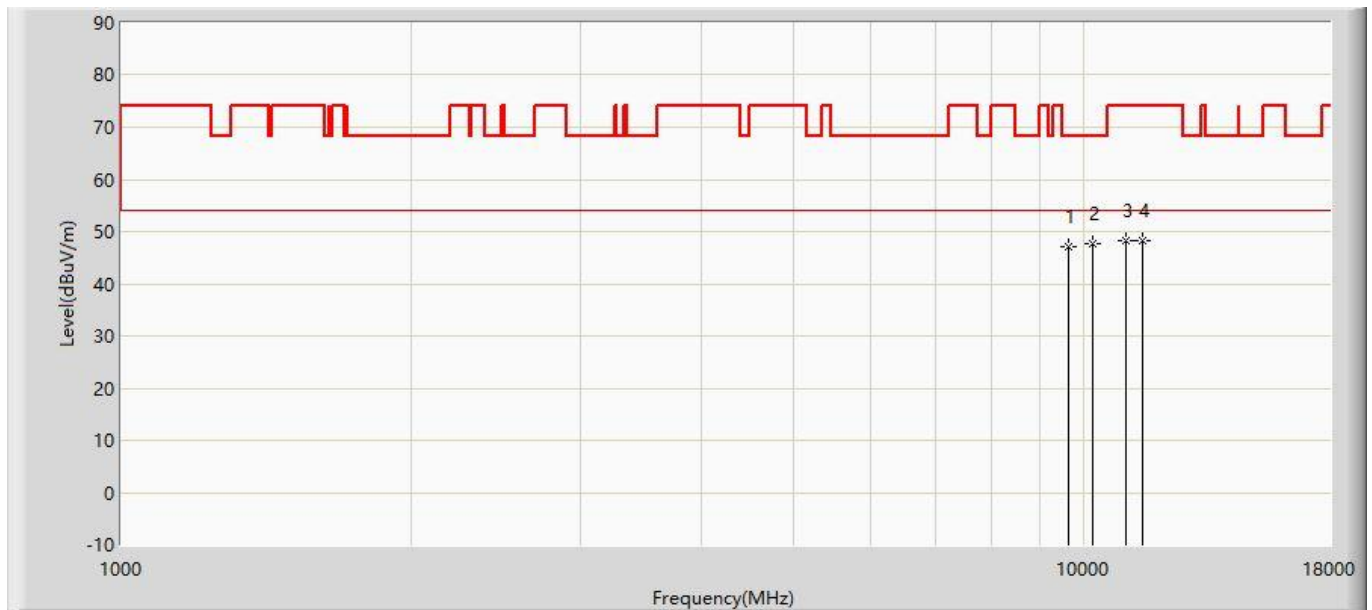


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			9644.500	47.085	32.991	-21.115	68.200	14.094	PK
2		*	10222.500	47.544	31.567	-20.656	68.200	15.976	PK
3			11055.500	48.246	30.614	-25.754	74.000	17.632	PK
4			11497.500	48.393	30.350	-25.607	74.000	18.043	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/21 - 11:38
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11a at Channel 5220MHz with OAW-AP1321-Scan Antenna	

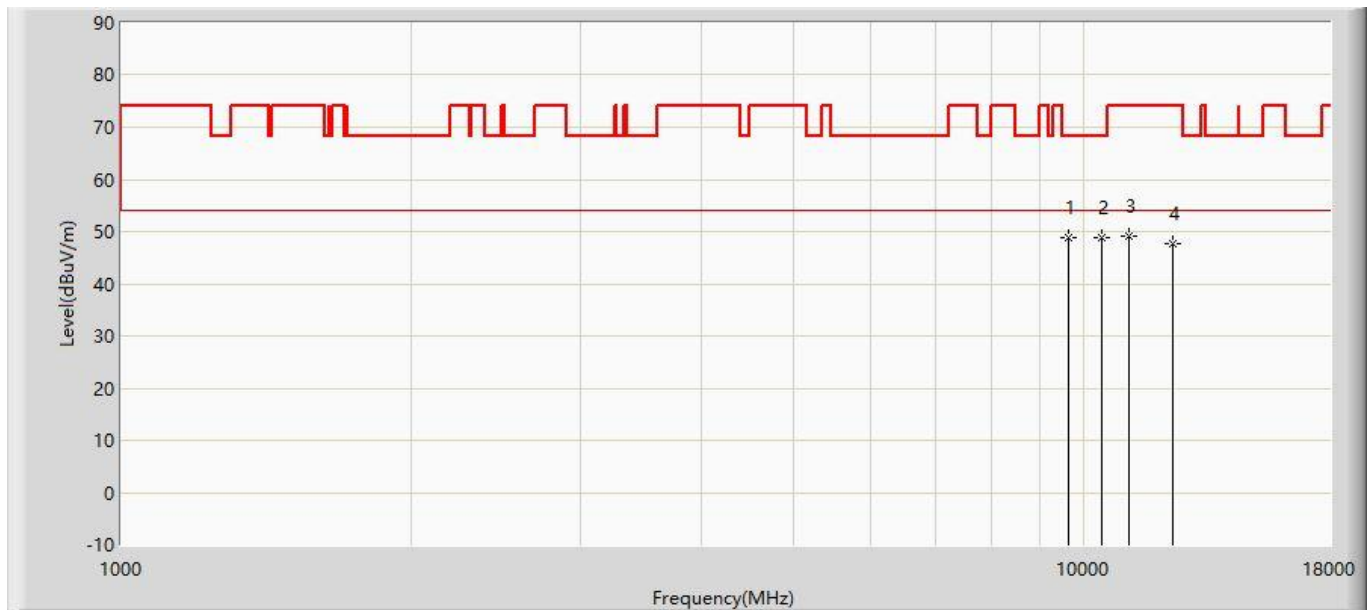


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			9644.500	48.707	34.613	-19.493	68.200	14.094	PK
2		*	10418.000	48.809	32.203	-19.391	68.200	16.606	PK
3			11140.500	49.186	31.473	-24.814	74.000	17.712	PK
4			12347.500	47.779	29.970	-26.221	74.000	17.809	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/21 - 11:38
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11a at Channel 5240MHz with OAW-AP1321-Scan Antenna	

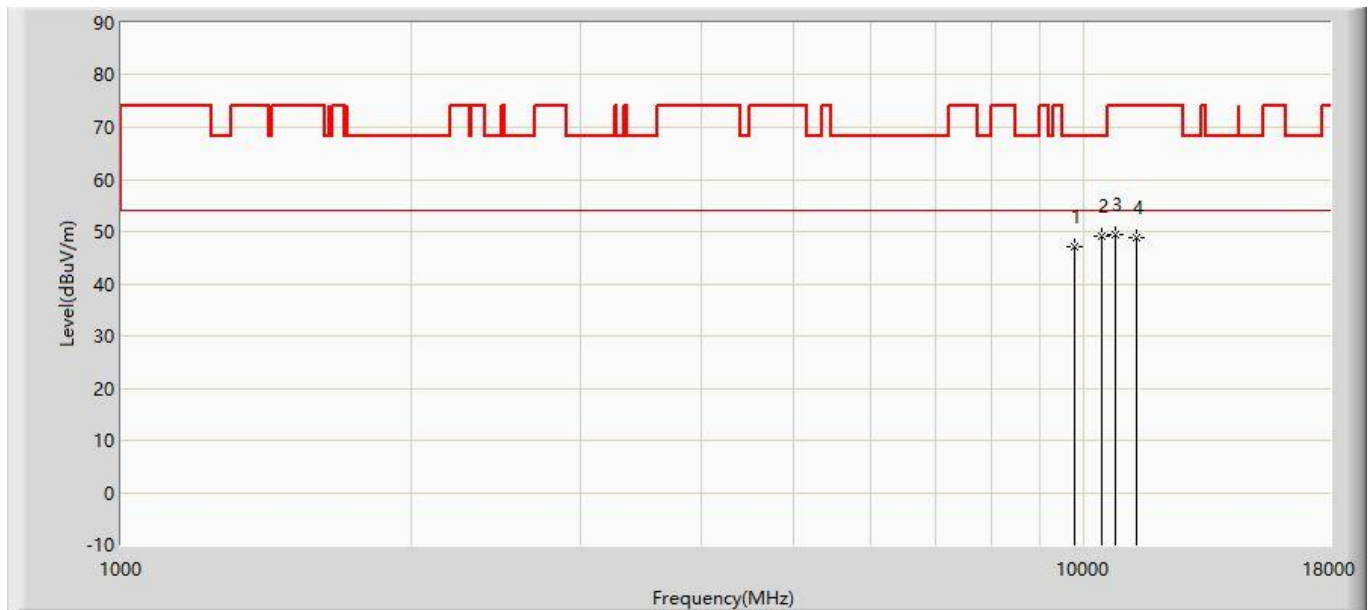


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			9772.000	47.068	32.556	-21.132	68.200	14.512	PK
2		*	10418.000	49.030	32.424	-19.170	68.200	16.606	PK
3			10783.500	49.552	32.279	-24.448	74.000	17.273	PK
4			11336.000	48.920	31.024	-25.080	74.000	17.896	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/21 - 11:38
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11a at Channel 5240MHz with OAW-AP1321-Scan Antenna	

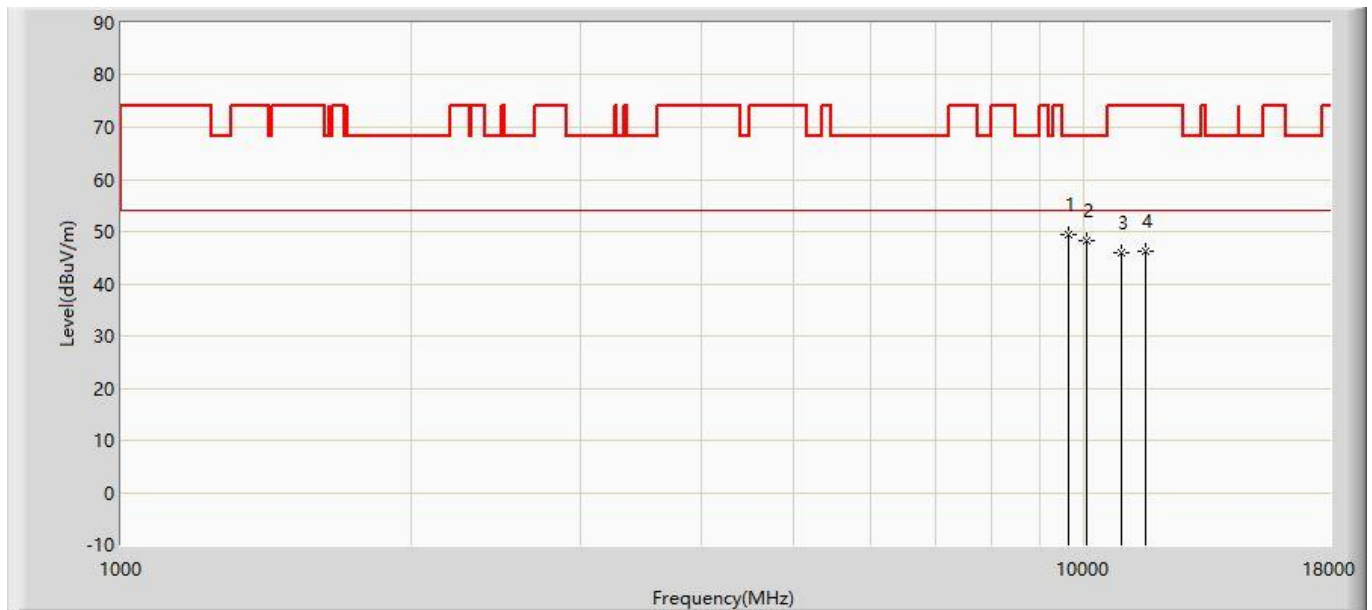


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	9644.500	49.510	35.416	-18.690	68.200	14.094	PK
2			10069.500	48.154	32.670	-20.046	68.200	15.484	PK
3			10928.000	45.802	28.325	-28.198	74.000	17.477	PK
4			11582.500	46.106	28.094	-27.894	74.000	18.012	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/21 - 11:41
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11a at Channel 5745MHz with OAW-AP1321-Scan Antenna	

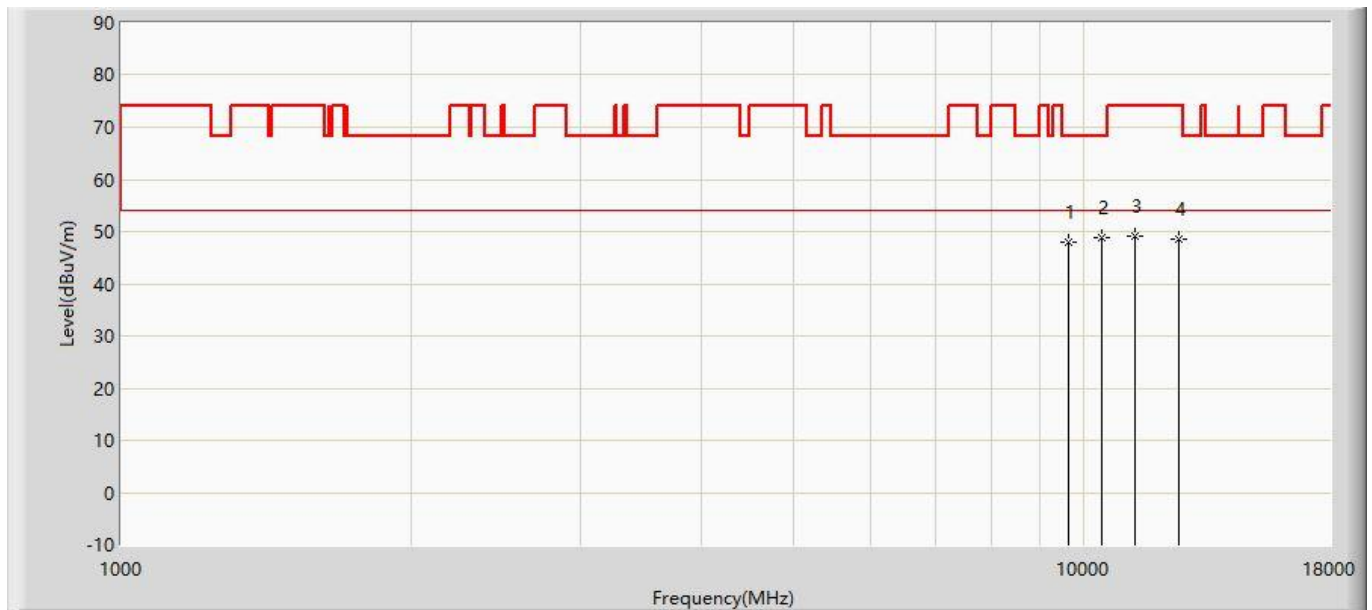


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			9644.500	48.035	33.941	-20.165	68.200	14.094	PK
2		*	10443.500	48.920	32.232	-19.280	68.200	16.688	PK
3			11293.500	49.188	31.332	-24.812	74.000	17.855	PK
4			12526.000	48.651	30.779	-25.349	74.000	17.872	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/21 - 11:41
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11a at Channel 5745MHz with OAW-AP1321-Scan Antenna	

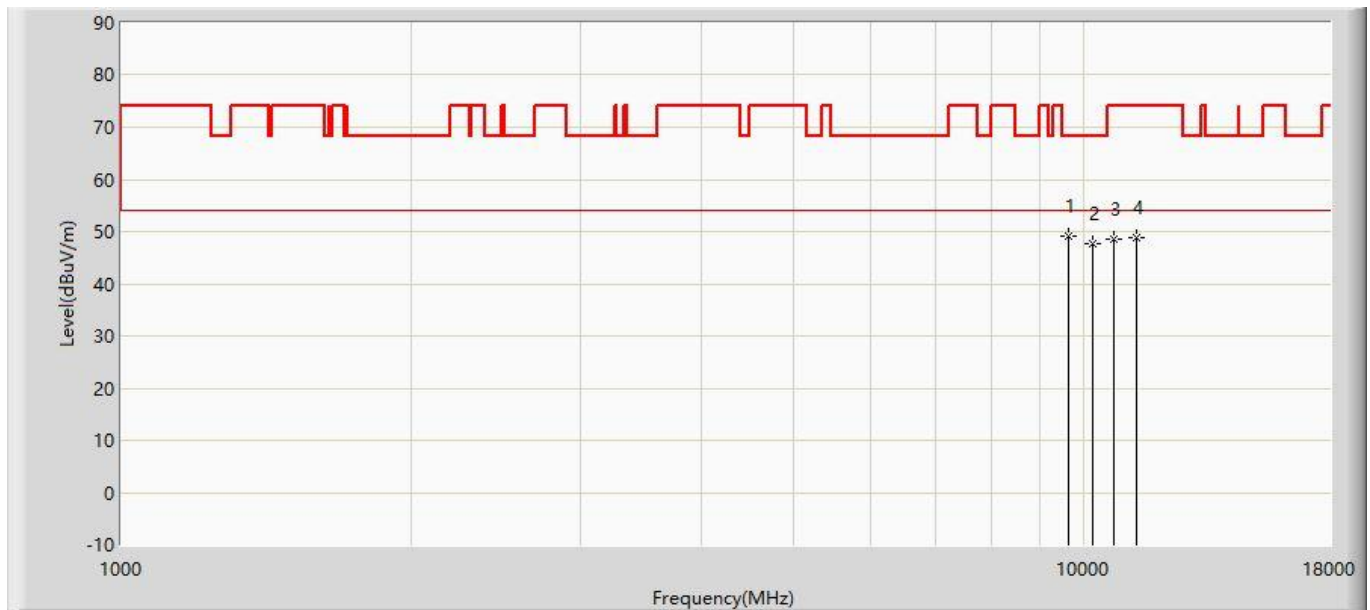


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	9644.500	48.986	34.892	-19.214	68.200	14.094	PK
2			10222.500	47.617	31.640	-20.583	68.200	15.976	PK
3			10749.500	48.564	31.339	-25.436	74.000	17.225	PK
4			11319.000	48.919	31.039	-25.081	74.000	17.880	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/21 - 11:42
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11a at Channel 5785MHz with OAW-AP1321-Scan Antenna	

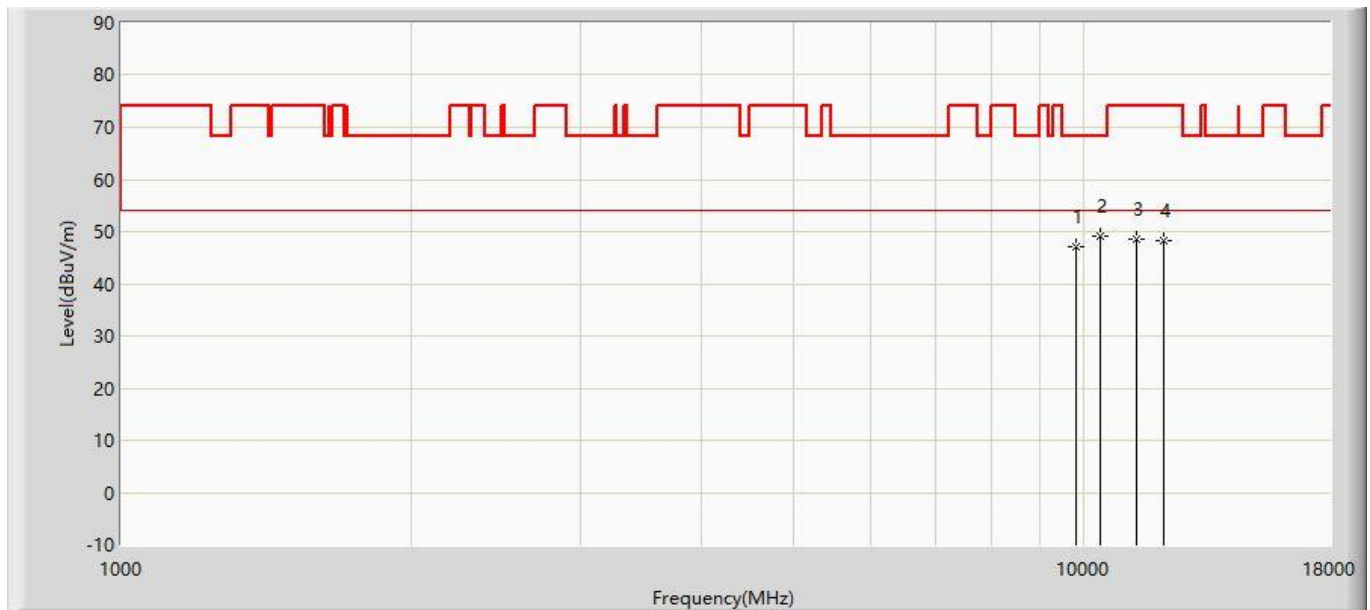


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			9797.500	46.962	32.366	-21.238	68.200	14.597	PK
2		*	10409.500	49.185	32.606	-19.015	68.200	16.579	PK
3			11336.000	48.667	30.771	-25.333	74.000	17.896	PK
4			12075.500	48.165	30.347	-25.835	74.000	17.818	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/21 - 11:42
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11a at Channel 5785MHz with OAW-AP1321-Scan Antenna	

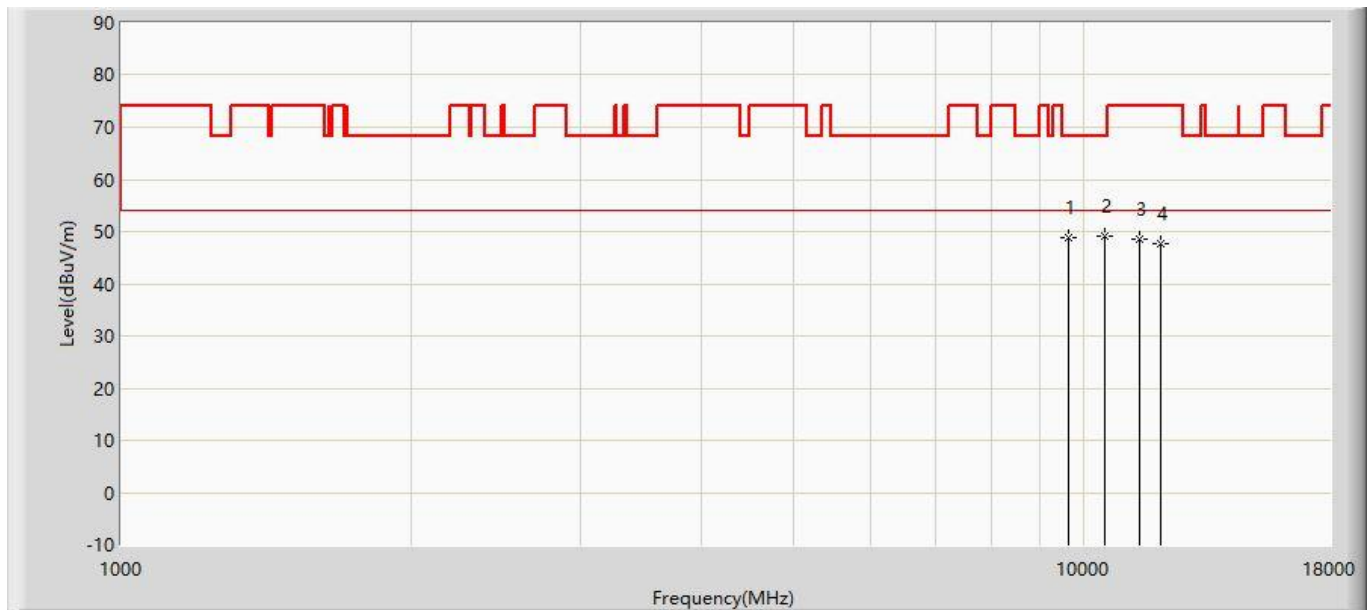


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			9644.500	48.784	34.690	-19.416	68.200	14.094	PK
2		*	10511.500	48.995	32.109	-19.205	68.200	16.886	PK
3			11412.500	48.452	30.485	-25.548	74.000	17.966	PK
4			11999.000	47.679	29.859	-26.321	74.000	17.820	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/21 - 11:42
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11a at Channel 5825MHz with OAW-AP1321-Scan Antenna	

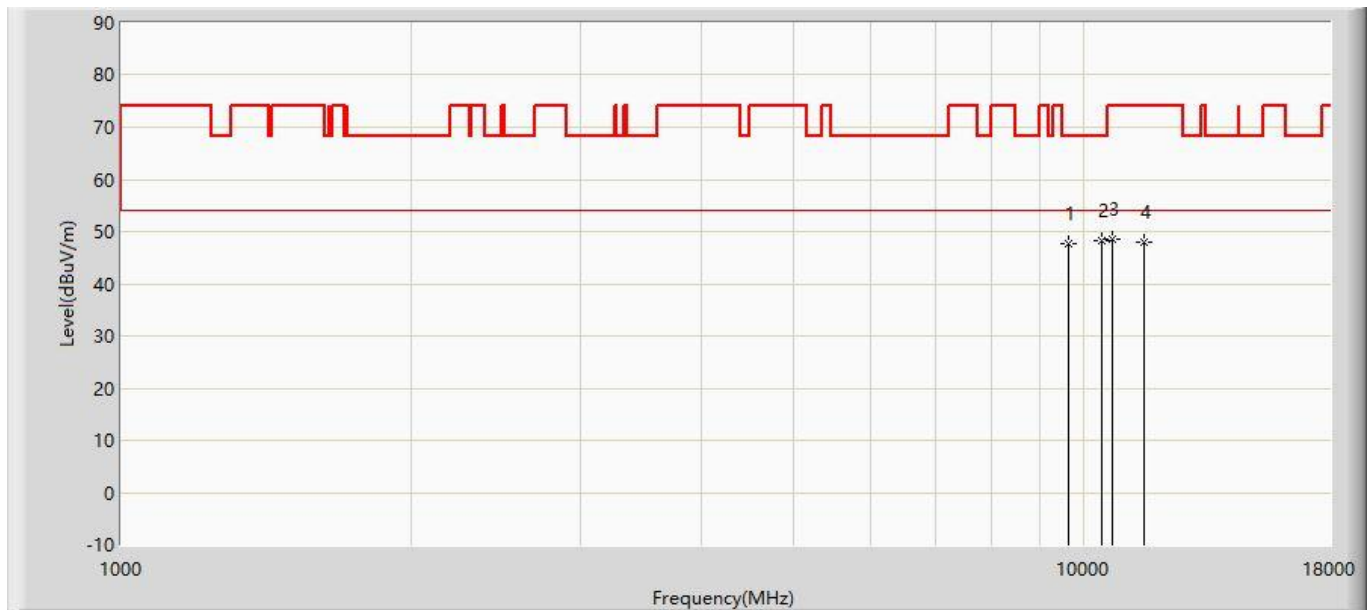


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			9644.500	47.800	33.706	-20.400	68.200	14.094	PK
2		*	10443.500	48.331	31.643	-19.869	68.200	16.688	PK
3			10698.500	48.635	31.483	-25.365	74.000	17.152	PK
4			11523.000	47.967	29.927	-26.033	74.000	18.040	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/21 - 11:42
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11a at Channel 5825MHz with OAW-AP1321-Scan Antenna	

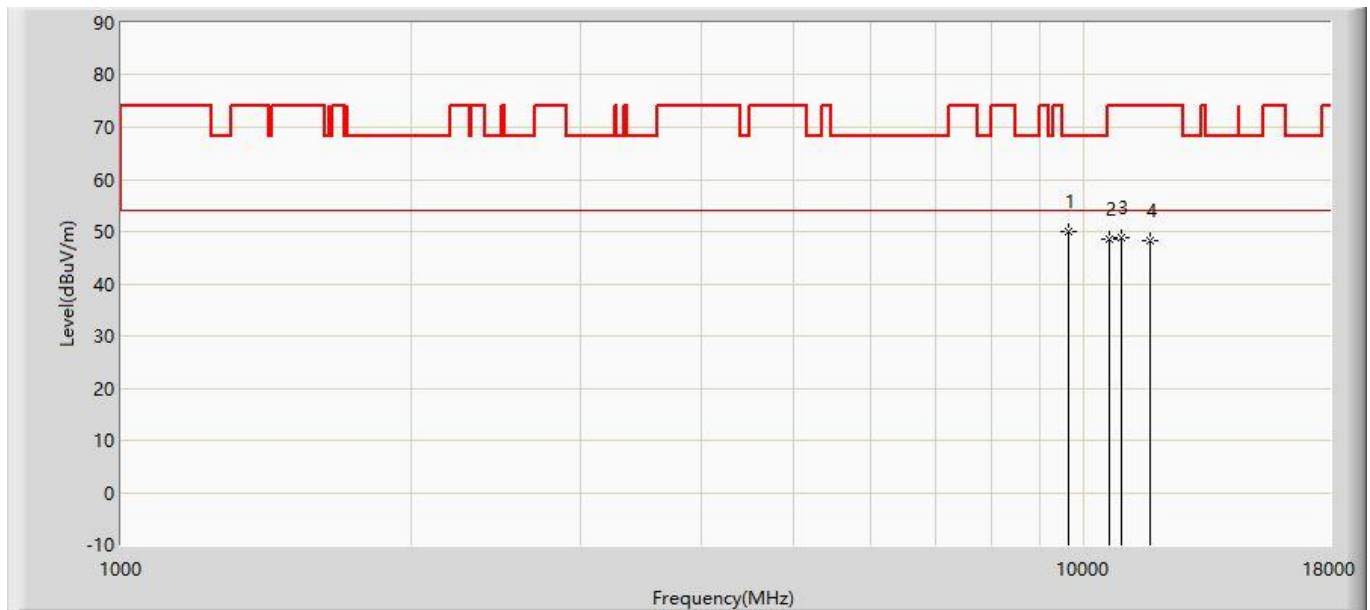


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	9644.500	50.073	35.979	-18.127	68.200	14.094	PK
2			10605.000	48.584	31.565	-25.416	74.000	17.019	PK
3			10936.500	48.782	31.293	-25.218	74.000	17.489	PK
4			11727.000	48.317	30.372	-25.683	74.000	17.945	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

無線基地台-OAW-AP1322-CDD Mode

Site: AC1	Time: 2020/04/23 - 11:06
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11a at channel 5180MHz with OAW-AP1322	

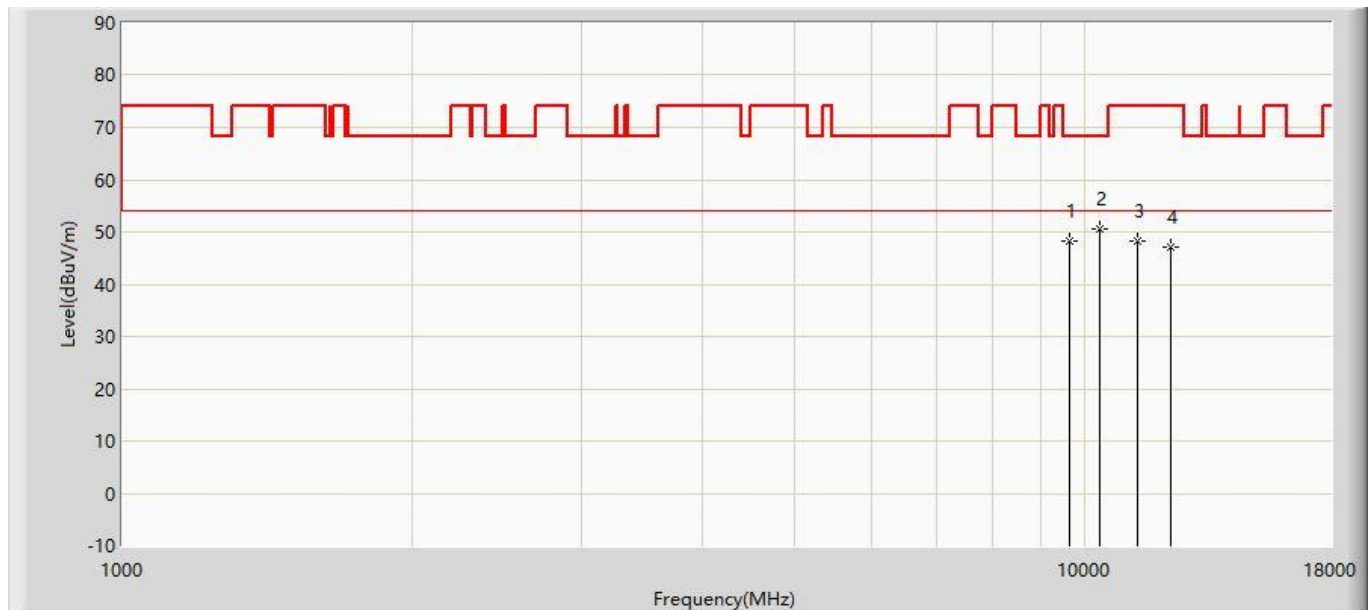


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			9644.500	48.212	34.118	-19.988	68.200	14.094	PK
2		*	10358.500	50.615	34.201	-17.585	68.200	16.414	PK
3			11327.500	48.238	30.350	-25.762	74.000	17.889	PK
4			12271.000	47.160	29.349	-26.840	74.000	17.811	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/23 - 11:06
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11a at channel 5180MHz with OAW-AP1322	

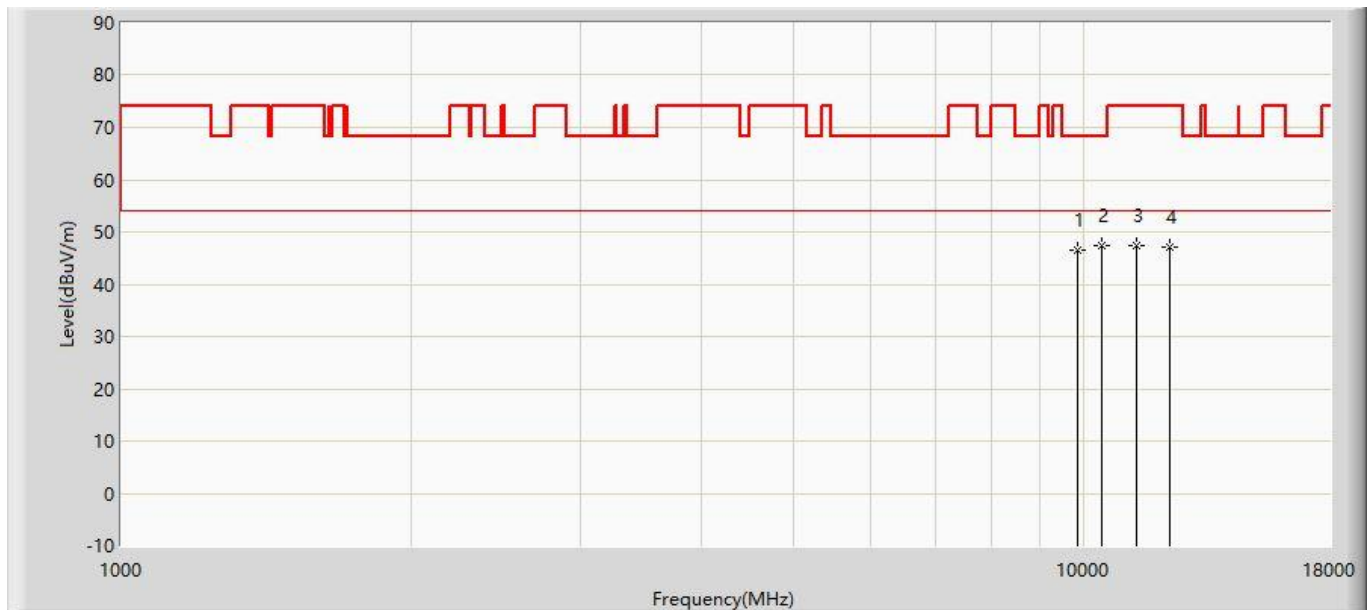


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			9857.000	46.448	31.658	-21.752	68.200	14.790	PK
2		*	10443.500	47.292	30.604	-20.908	68.200	16.688	PK
3			11353.000	47.436	29.525	-26.564	74.000	17.911	PK
4			12271.000	47.160	29.349	-26.840	74.000	17.811	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/23 - 11:06
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11a at channel 5220MHz with OAW-AP1322	

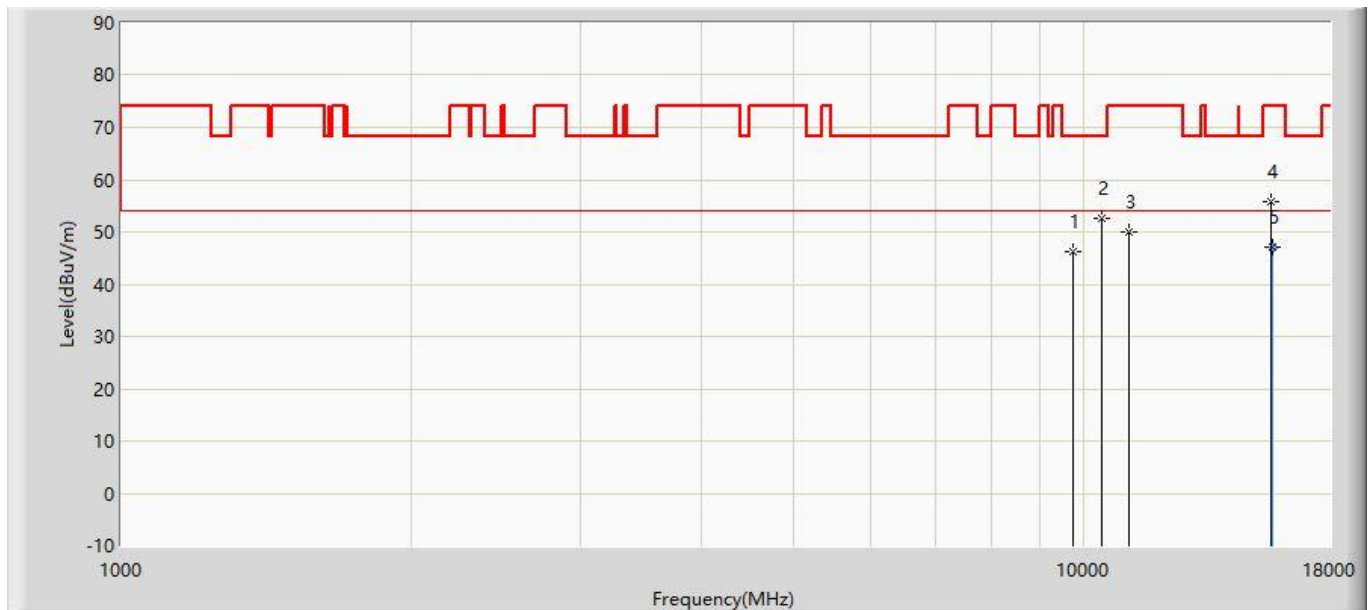


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			9729.500	46.133	31.760	-22.067	68.200	14.373	PK
2			10443.500	52.674	35.986	-15.526	68.200	16.688	PK
3			11140.500	49.856	32.143	-24.144	74.000	17.712	PK
4			15662.500	55.847	35.040	-18.153	74.000	20.807	PK
5		*	15665.550	47.181	26.377	-6.819	54.000	20.804	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/23 - 11:06
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11a at channel 5220MHz with OAW-AP1322	

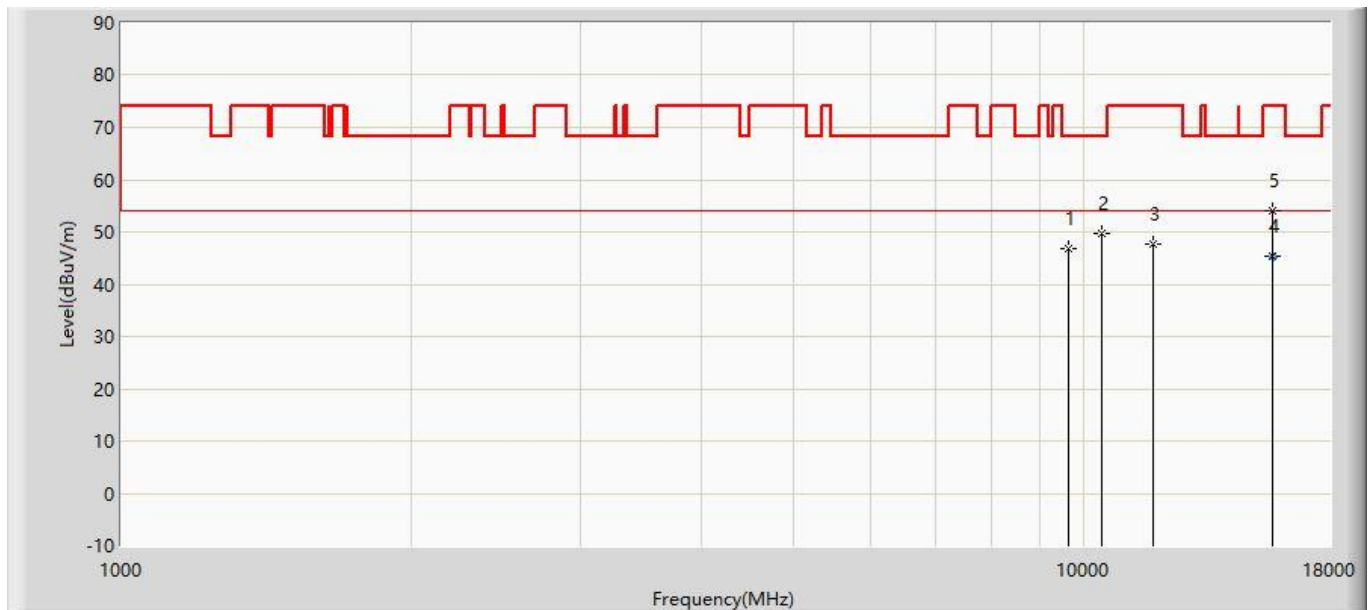


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			9636.000	46.681	32.615	-21.519	68.200	14.066	PK
2			10443.500	49.723	33.035	-18.477	68.200	16.688	PK
3			11786.500	47.742	29.823	-26.258	74.000	17.918	PK
4		*	15665.550	45.460	24.656	-8.540	54.000	20.804	AV
5			15671.000	53.960	33.161	-20.040	74.000	20.799	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/23 - 11:06
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11a at channel 5240MHz with OAW-AP1322	

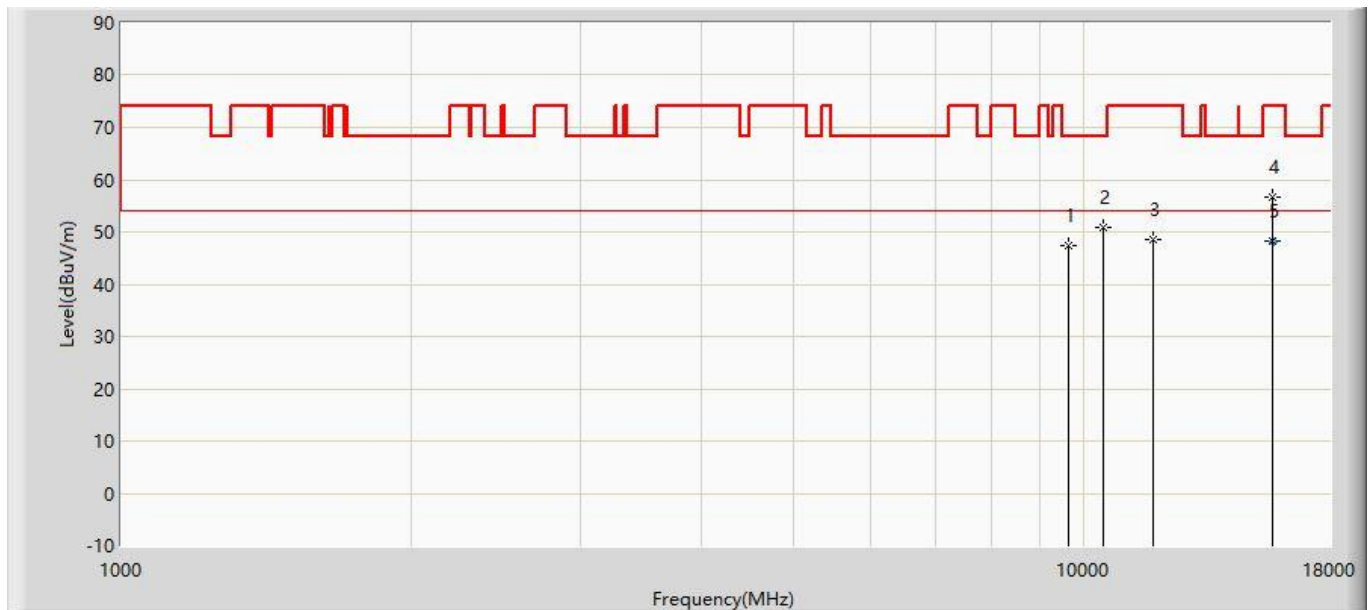


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			9644.500	47.441	33.347	-20.759	68.200	14.094	PK
2			10477.500	51.005	34.208	-17.195	68.200	16.797	PK
3			11795.000	48.417	30.503	-25.583	74.000	17.914	PK
4			15713.500	56.531	35.769	-17.469	74.000	20.762	PK
5		*	15716.550	48.369	27.610	-5.631	54.000	20.759	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/23 - 11:06
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11a at channel 5240MHz with OAW-AP1322	

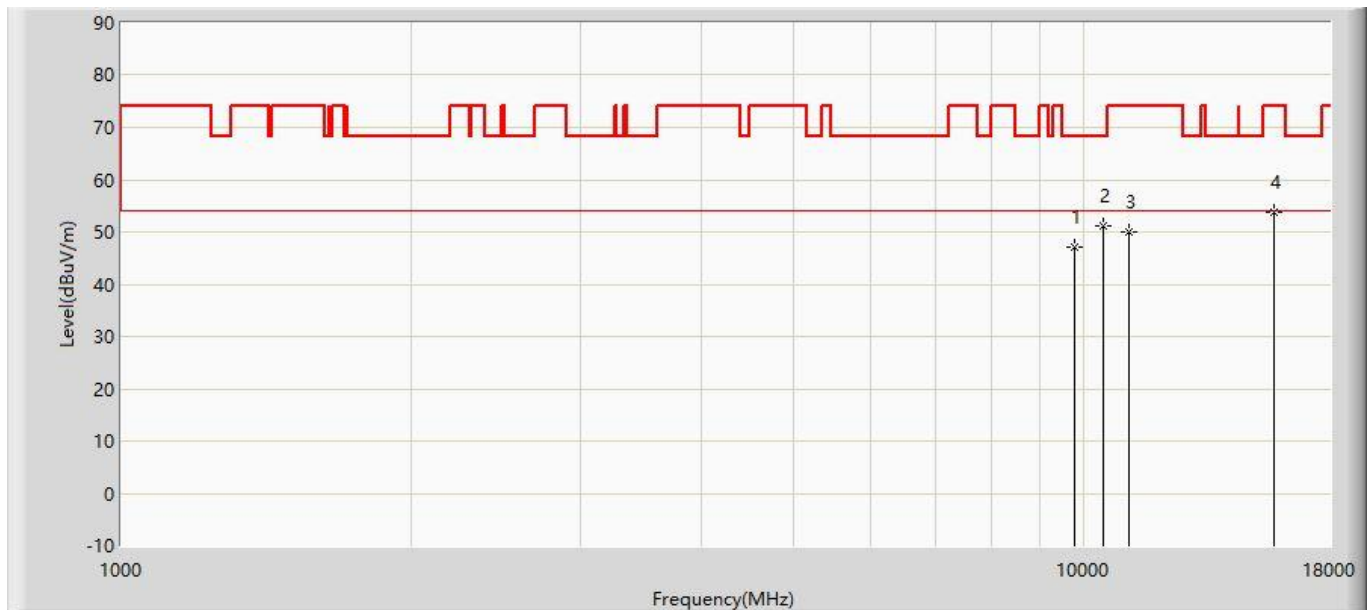


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			9772.000	47.010	32.498	-21.190	68.200	14.512	PK
2		*	10477.500	51.269	34.472	-16.931	68.200	16.797	PK
3			11149.000	49.863	32.143	-24.137	74.000	17.720	PK
4			15722.000	53.648	32.894	-20.352	74.000	20.754	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/23 - 11:06
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11a at channel 5260MHz with OAW-AP1322	

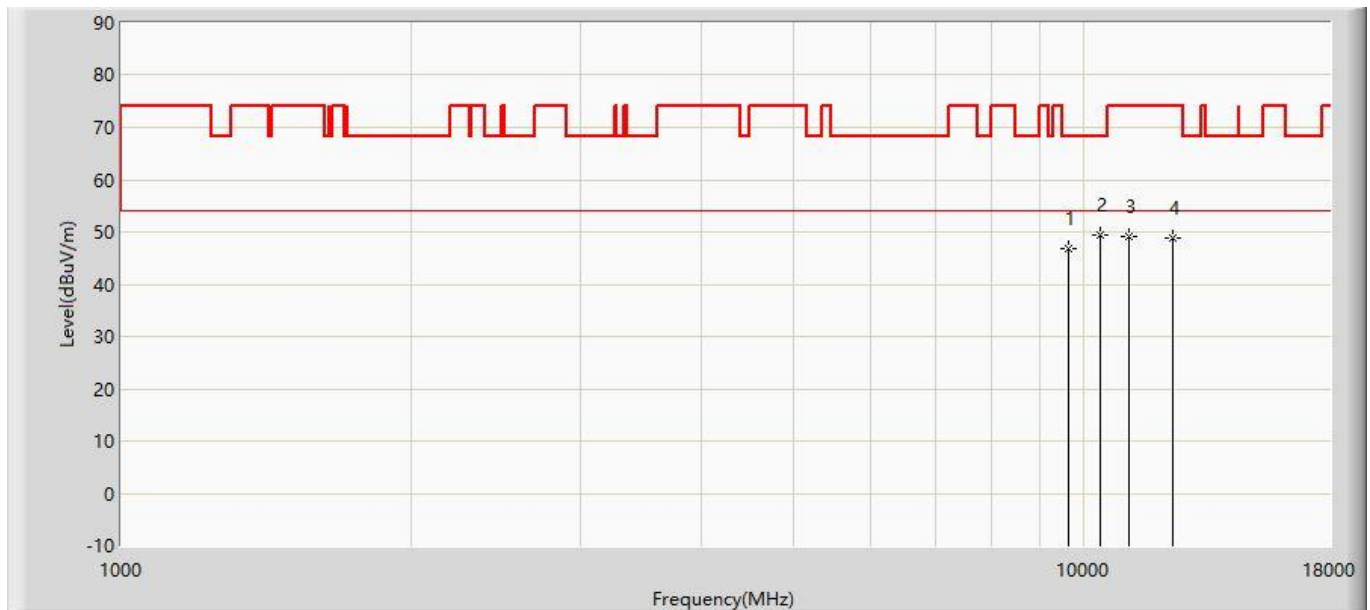


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			9644.500	46.768	32.674	-21.432	68.200	14.094	PK
2		*	10401.000	49.373	32.822	-18.827	68.200	16.551	PK
3			11149.000	48.987	31.267	-25.013	74.000	17.720	PK
4			12381.500	48.722	30.913	-25.278	74.000	17.808	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/23 - 11:07
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11a at channel 5260MHz with OAW-AP1322	

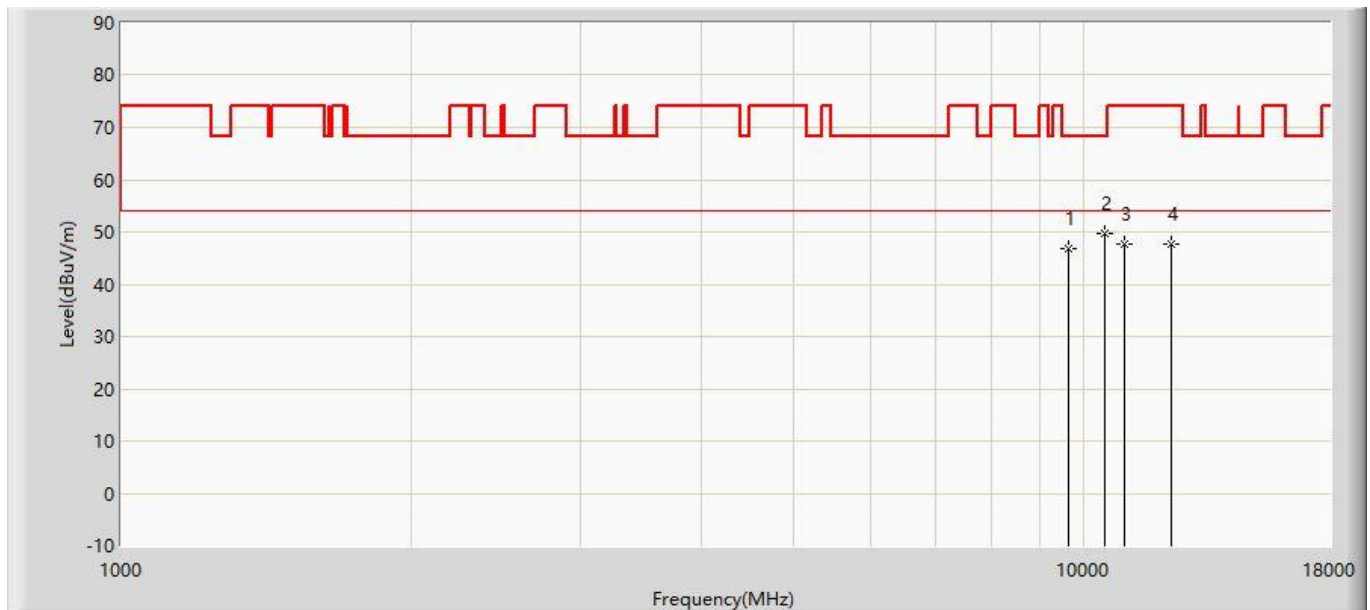


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			9644.500	46.768	32.674	-21.432	68.200	14.094	PK
2		*	10520.000	49.826	32.928	-18.374	68.200	16.898	PK
3			10996.000	47.779	30.204	-26.221	74.000	17.575	PK
4			12296.500	47.662	29.851	-26.338	74.000	17.811	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/23 - 11:07
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11a at channel 5300MHz with OAW-AP1322	

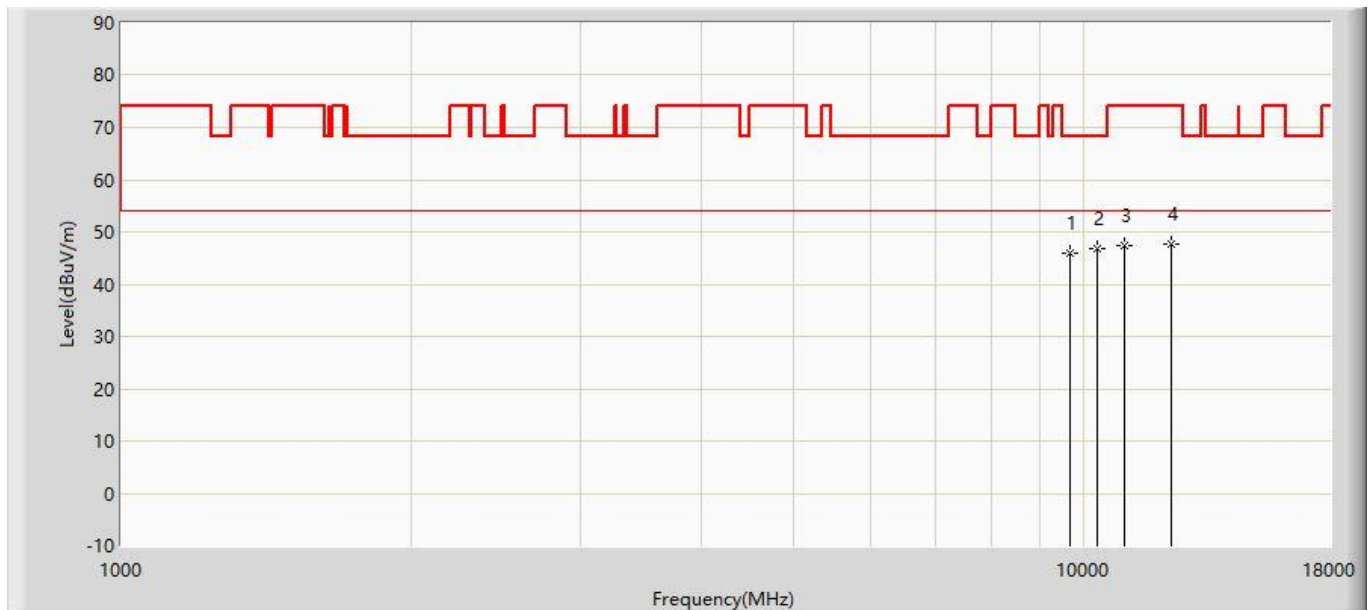


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			9653.000	46.016	31.894	-22.184	68.200	14.122	PK
2		*	10316.000	46.930	30.652	-21.270	68.200	16.278	PK
3			11021.500	47.364	29.764	-26.636	74.000	17.600	PK
4			12296.500	47.662	29.851	-26.338	74.000	17.811	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/23 - 11:07
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11a at channel 5300MHz with OAW-AP1322	

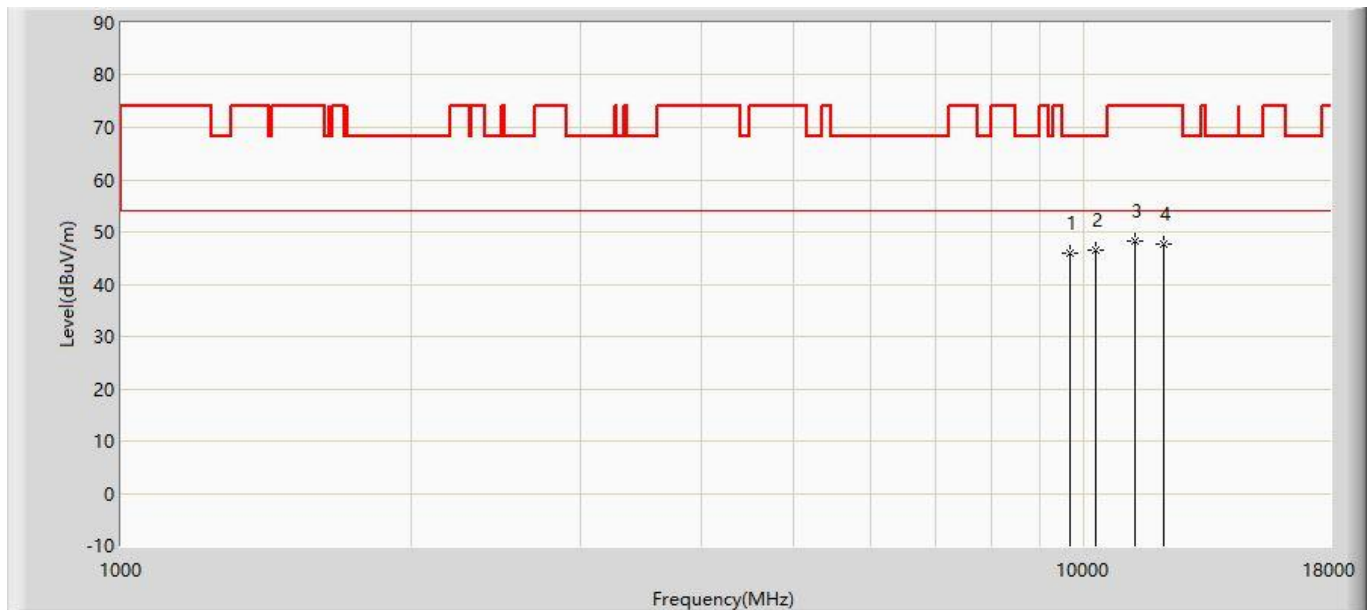


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			9653.000	45.873	31.751	-22.327	68.200	14.122	PK
2		*	10290.500	46.532	30.337	-21.668	68.200	16.194	PK
3			11285.000	48.157	30.310	-25.843	74.000	17.847	PK
4			12109.500	47.635	29.819	-26.365	74.000	17.816	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/23 - 11:07
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11a at channel 5320MHz with OAW-AP1322	

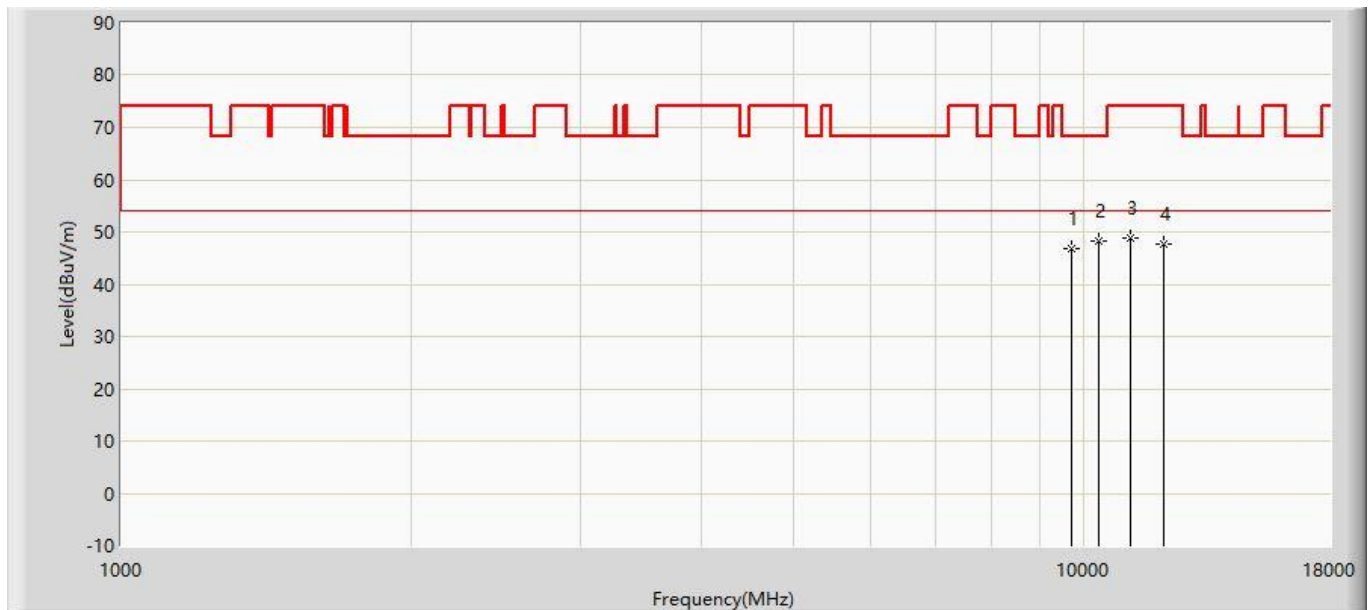


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			9704.000	46.826	32.537	-21.374	68.200	14.289	PK
2		*	10367.000	48.179	31.738	-20.021	68.200	16.441	PK
3			11183.000	48.934	31.182	-25.066	74.000	17.752	PK
4			12109.500	47.635	29.819	-26.365	74.000	17.816	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/23 - 11:07
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11a at channel 5320MHz with OAW-AP1322	

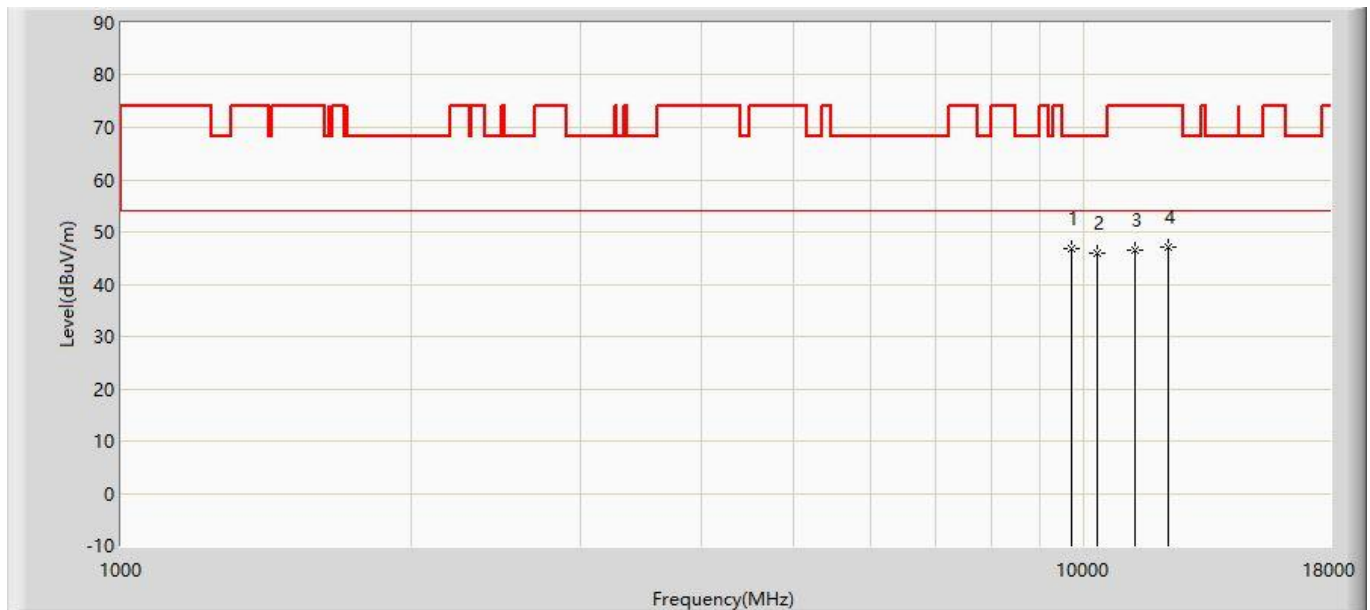


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	9704.000	46.826	32.537	-21.374	68.200	14.289	PK
2			10307.500	45.861	29.610	-22.339	68.200	16.251	PK
3			11276.500	46.594	28.754	-27.406	74.000	17.840	PK
4			12228.500	47.138	29.324	-26.862	74.000	17.814	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/23 - 11:07
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11a at channel 5500MHz with OAW-AP1322	

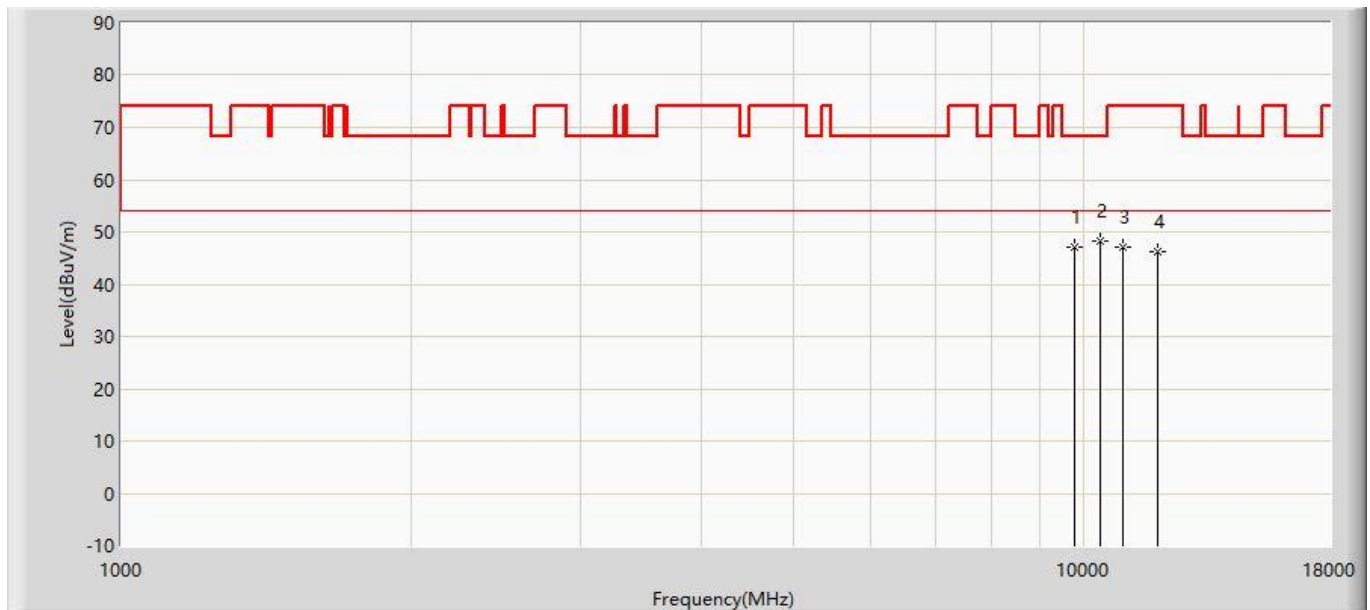


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			9780.500	47.193	32.653	-21.007	68.200	14.540	PK
2		*	10392.500	48.242	31.719	-19.958	68.200	16.524	PK
3			10979.000	47.015	29.465	-26.985	74.000	17.550	PK
4			11914.000	46.351	28.491	-27.649	74.000	17.860	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/23 - 11:07
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11a at channel 5500MHz with OAW-AP1322	

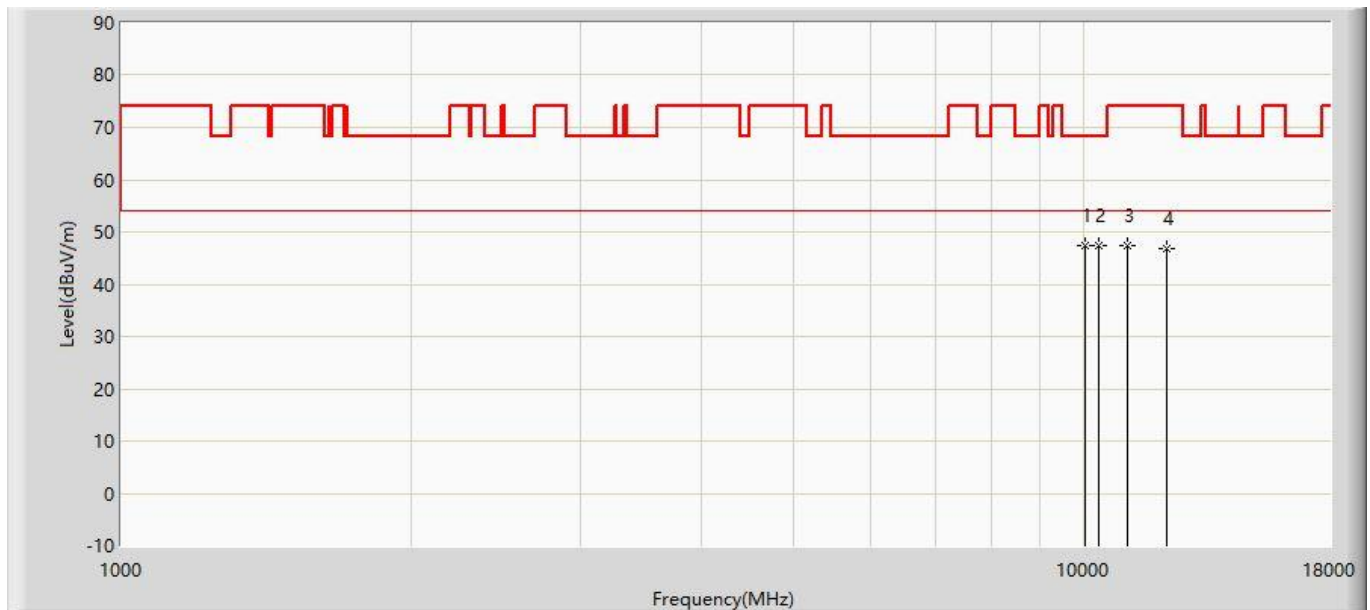


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	10018.500	47.357	32.038	-20.843	68.200	15.318	PK
2			10358.500	47.356	30.942	-20.844	68.200	16.414	PK
3			11081.000	47.251	29.595	-26.749	74.000	17.656	PK
4			12177.500	46.953	29.138	-27.047	74.000	17.814	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/23 - 11:07
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11a at channel 5600MHz with OAW-AP1322	

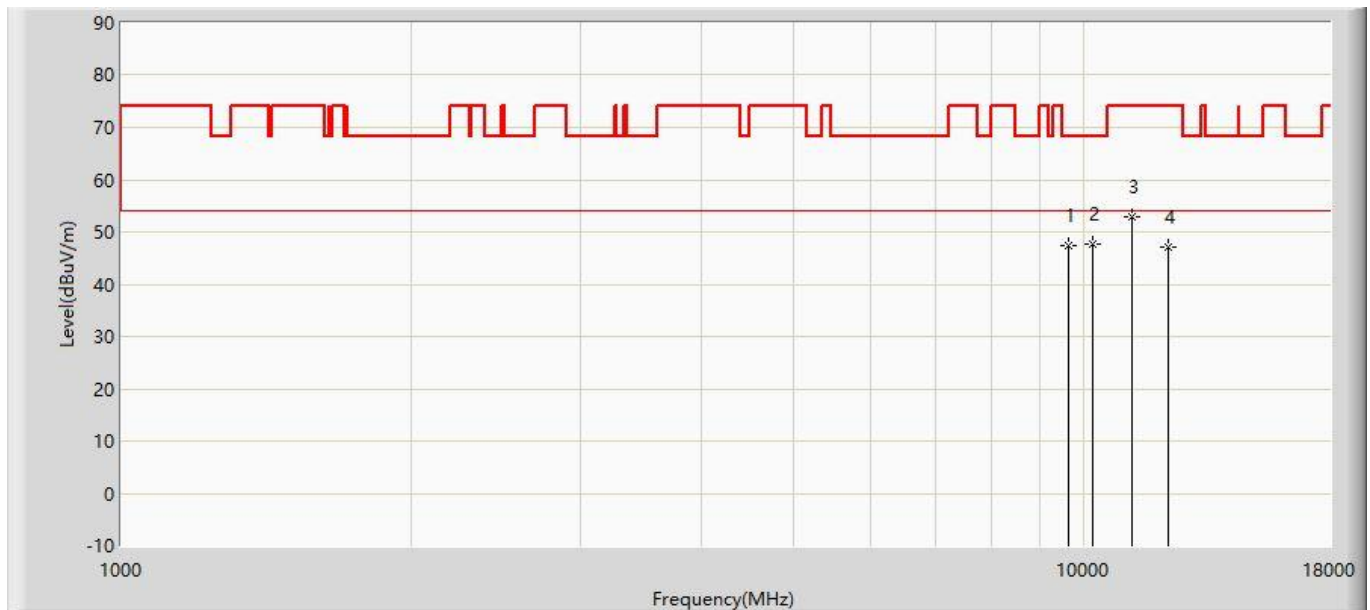


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			9644.500	47.411	33.317	-20.789	68.200	14.094	PK
2		*	10214.000	47.648	31.699	-20.552	68.200	15.949	PK
3			11200.000	52.864	35.096	-21.136	74.000	17.768	PK
4			12220.000	47.106	29.292	-26.894	74.000	17.814	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/23 - 11:07
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11a at channel 5600MHz with OAW-AP1322	

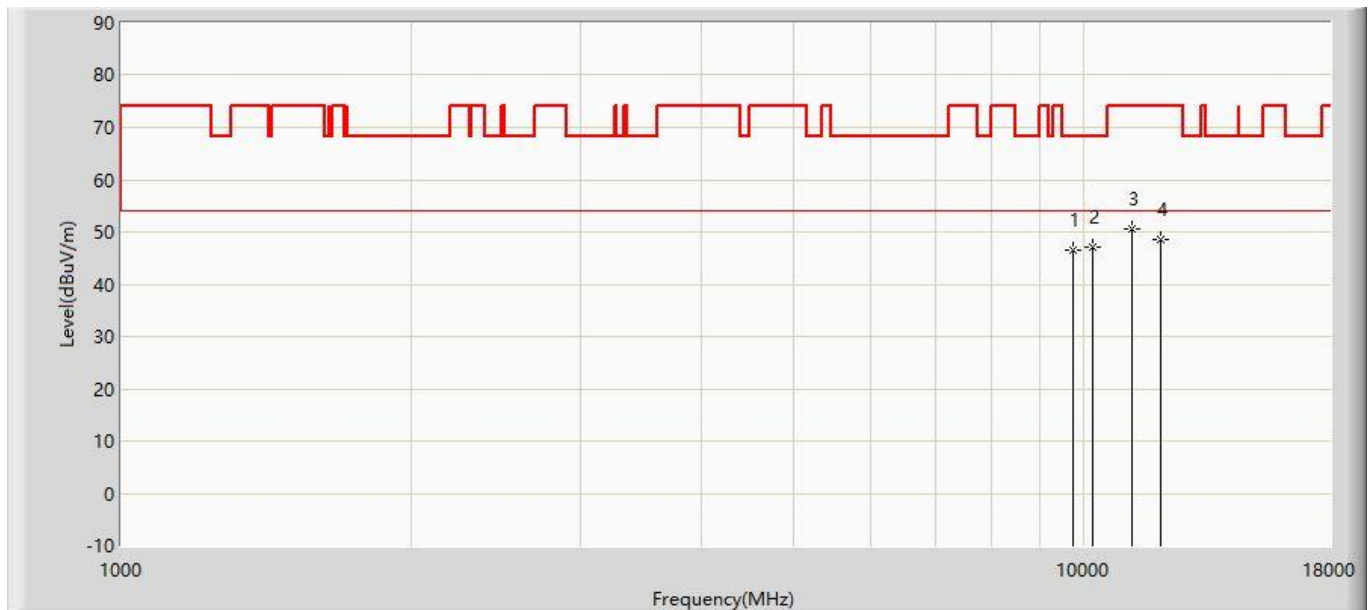


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			9755.000	46.572	32.116	-21.628	68.200	14.456	PK
2		*	10214.000	47.205	31.256	-20.995	68.200	15.949	PK
3			11200.000	50.637	32.869	-23.363	74.000	17.768	PK
4			12024.500	48.531	30.712	-25.469	74.000	17.819	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/23 - 11:07
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11a at channel 5700MHz with OAW-AP1322	

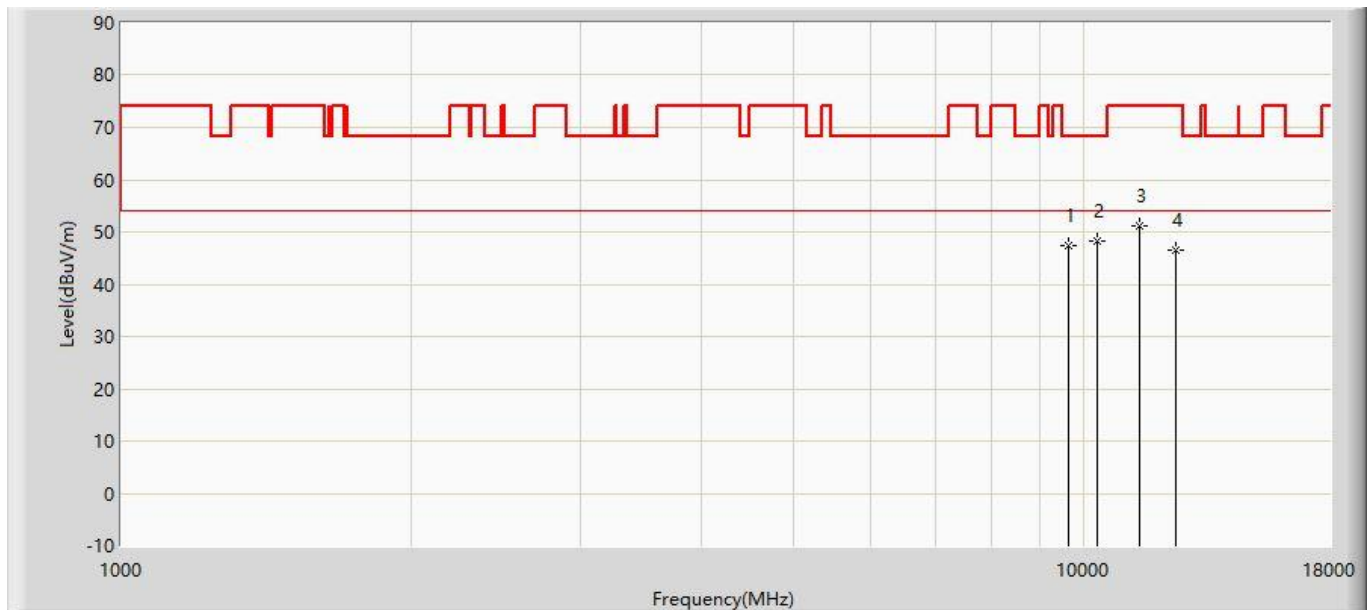


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			9644.500	47.450	33.356	-20.750	68.200	14.094	PK
2		*	10324.500	48.133	31.828	-20.067	68.200	16.305	PK
3			11404.000	51.153	33.193	-22.847	74.000	17.960	PK
4			12441.000	46.477	28.670	-27.523	74.000	17.807	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/23 - 11:07
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11a at channel 5700MHz with OAW-AP1322	

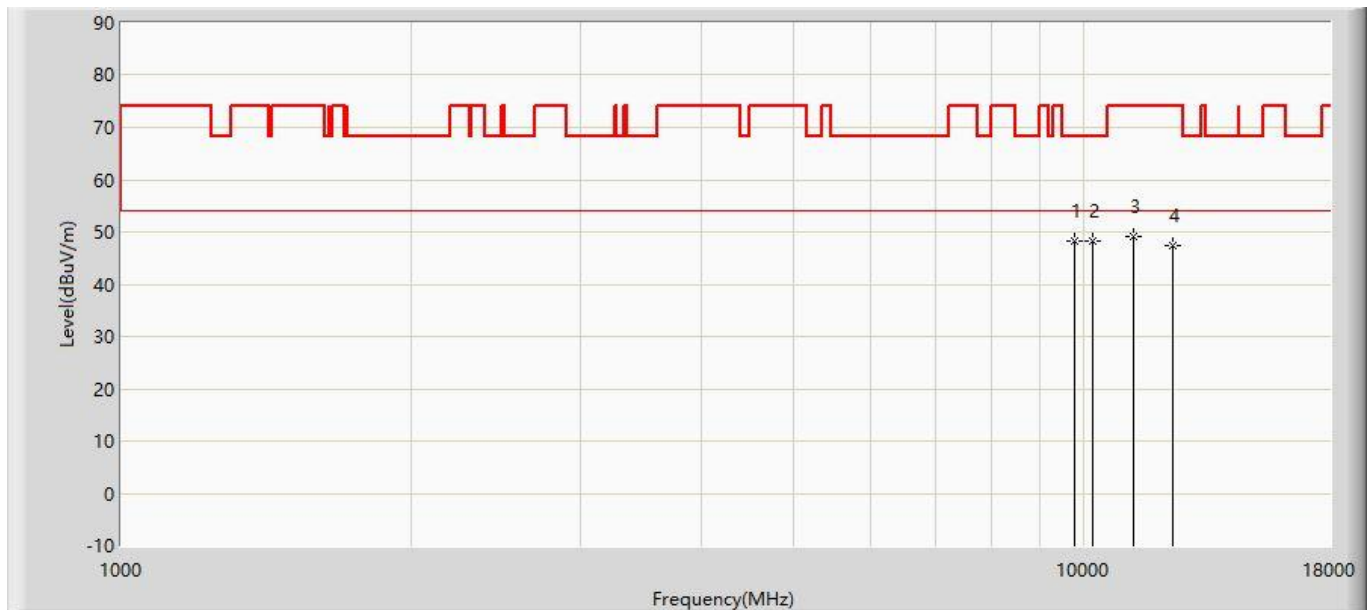


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			9772.000	48.231	33.719	-19.969	68.200	14.512	PK
2		*	10214.000	48.254	32.305	-19.946	68.200	15.949	PK
3			11268.000	49.228	31.396	-24.772	74.000	17.832	PK
4			12381.500	47.285	29.476	-26.715	74.000	17.808	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/23 - 11:07
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11a at channel 5720MHz with OAW-AP1322	

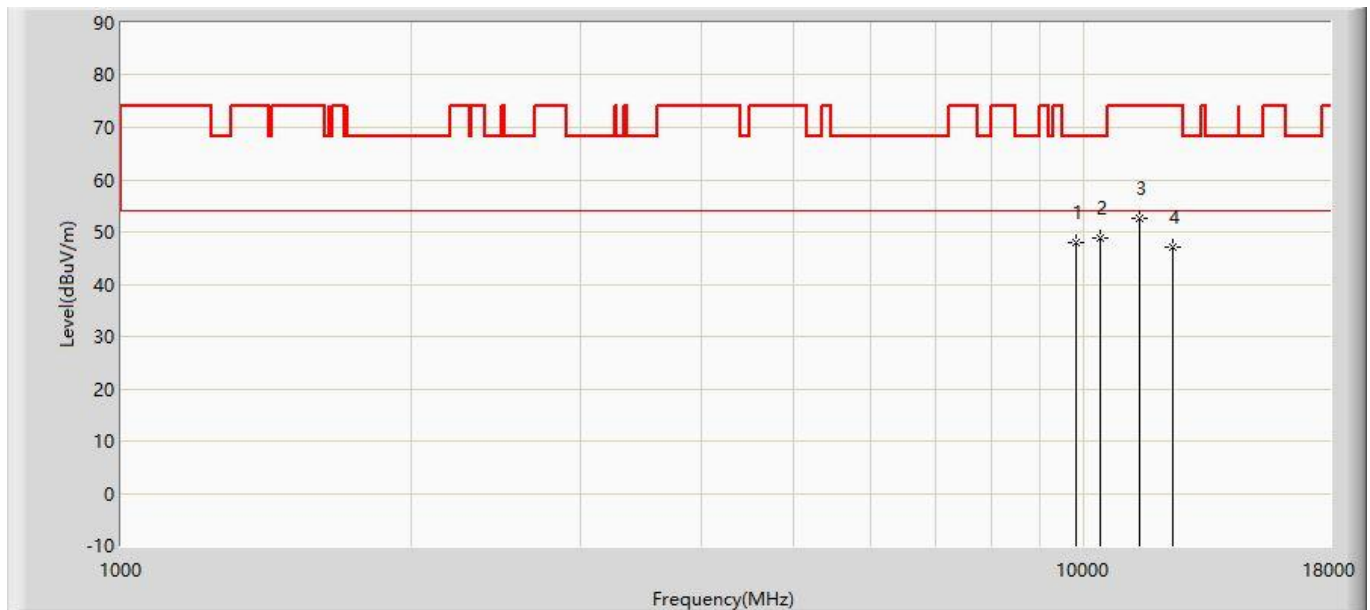


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			9823.000	47.846	33.166	-20.354	68.200	14.680	PK
2		*	10401.000	48.725	32.174	-19.475	68.200	16.551	PK
3			11438.000	52.619	34.628	-21.381	74.000	17.991	PK
4			12373.000	47.173	29.364	-26.827	74.000	17.809	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/23 - 11:08
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11a at channel 5720MHz with OAW-AP1322	

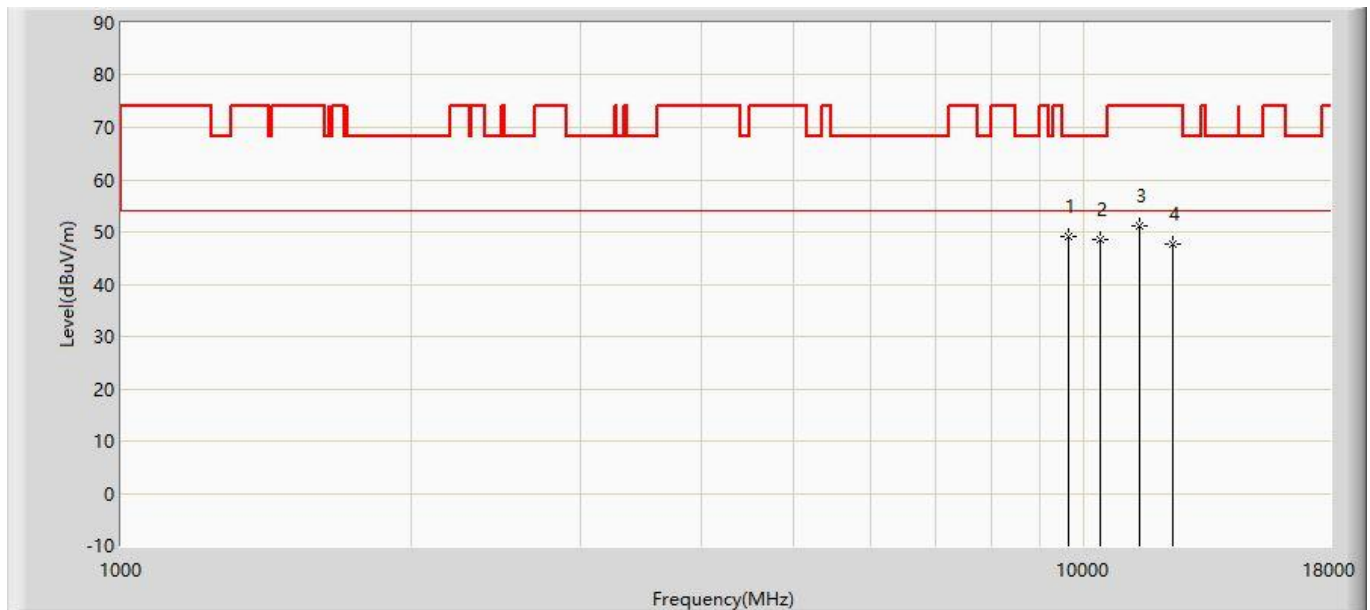


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	9644.500	49.233	35.139	-18.967	68.200	14.094	PK
2			10375.500	48.606	32.137	-19.594	68.200	16.470	PK
3			11438.000	51.041	33.050	-22.959	74.000	17.991	PK
4			12373.000	47.649	29.840	-26.351	74.000	17.809	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/23 - 11:08
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11a at channel 5745MHz with OAW-AP1322	

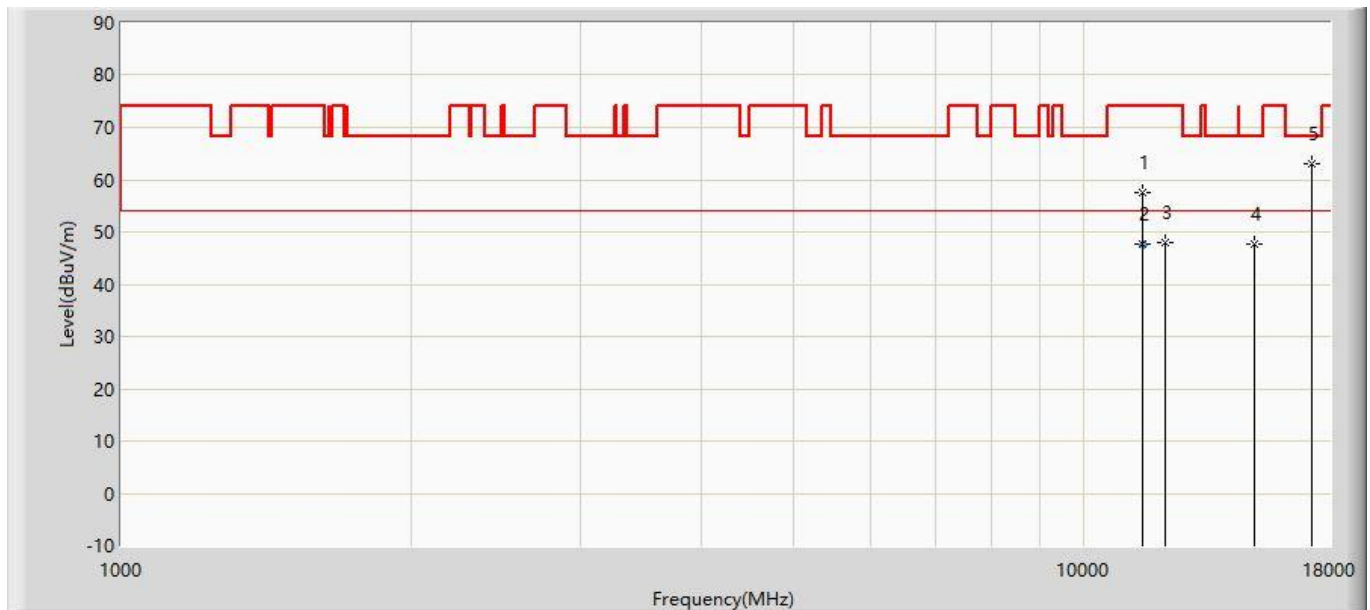


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			11489.000	57.409	39.369	-16.591	74.000	18.040	PK
2			11491.450	47.736	29.695	-6.264	54.000	18.041	AV
3			12143.500	47.828	30.012	-26.172	74.000	17.816	PK
4			15016.500	47.800	27.005	-20.400	68.200	20.795	PK
5		*	17226.500	62.929	35.276	-5.271	68.200	27.653	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/23 - 11:08
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11a at channel 5745MHz with OAW-AP1322	

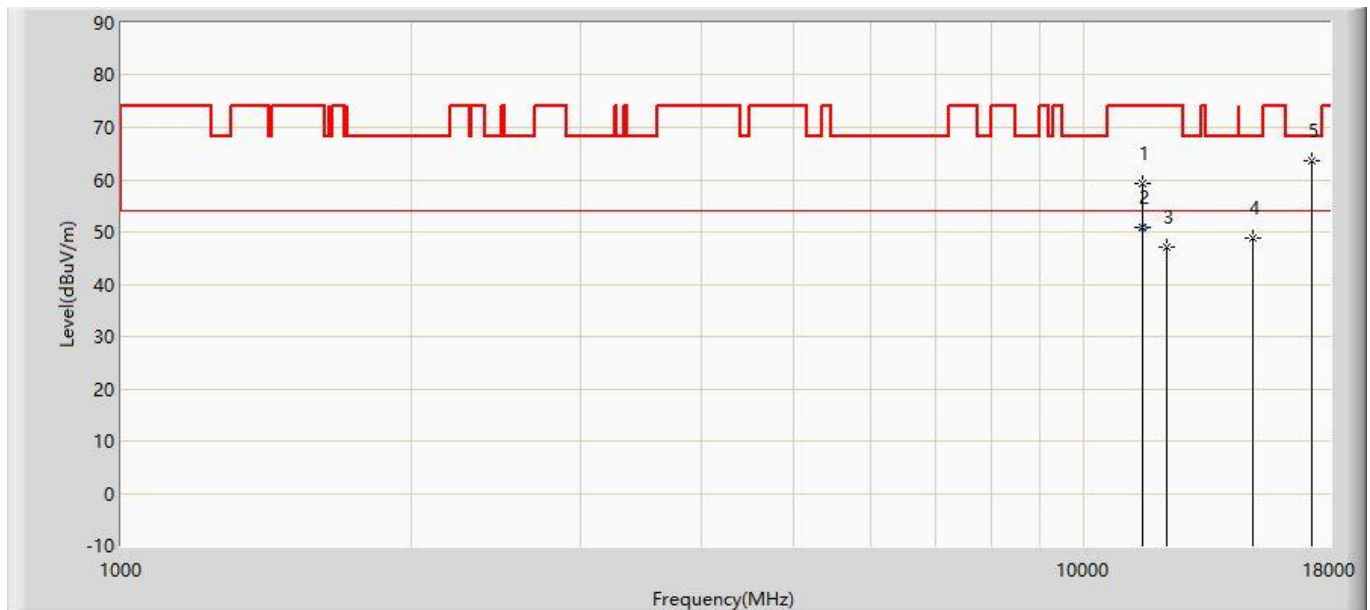


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			11489.000	59.209	41.169	-14.791	74.000	18.040	PK
2		*	11491.100	50.984	32.943	-3.016	54.000	18.041	AV
3			12177.500	47.053	29.238	-26.947	74.000	17.814	PK
4			14974.000	48.712	27.929	-19.488	68.200	20.783	PK
5			17226.500	63.709	36.056	-4.491	68.200	27.653	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/23 - 11:08
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11a at channel 5785MHz with OAW-AP1322	

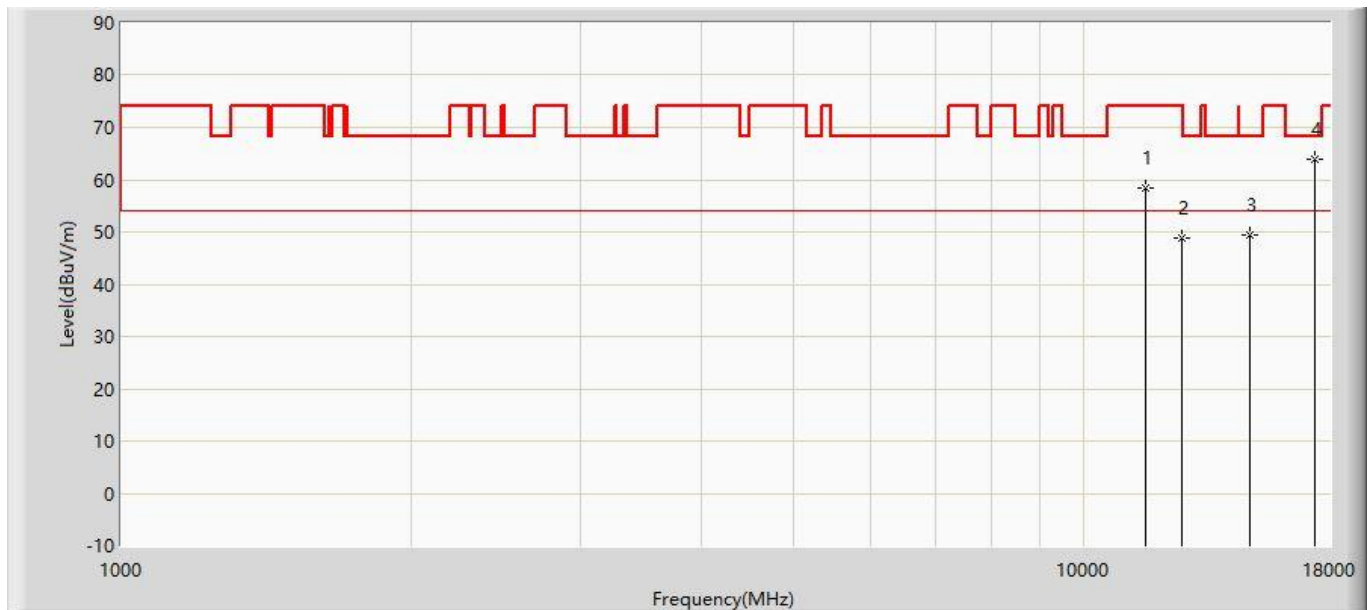


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			11574.000	58.418	40.402	-15.582	74.000	18.016	PK
2			12636.500	48.985	30.829	-25.015	74.000	18.155	PK
3			14855.000	49.399	28.648	-18.801	68.200	20.751	PK
4		*	17345.500	63.996	35.218	-4.204	68.200	28.778	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/23 - 11:08
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11a at channel 5785MHz with OAW-AP1322	

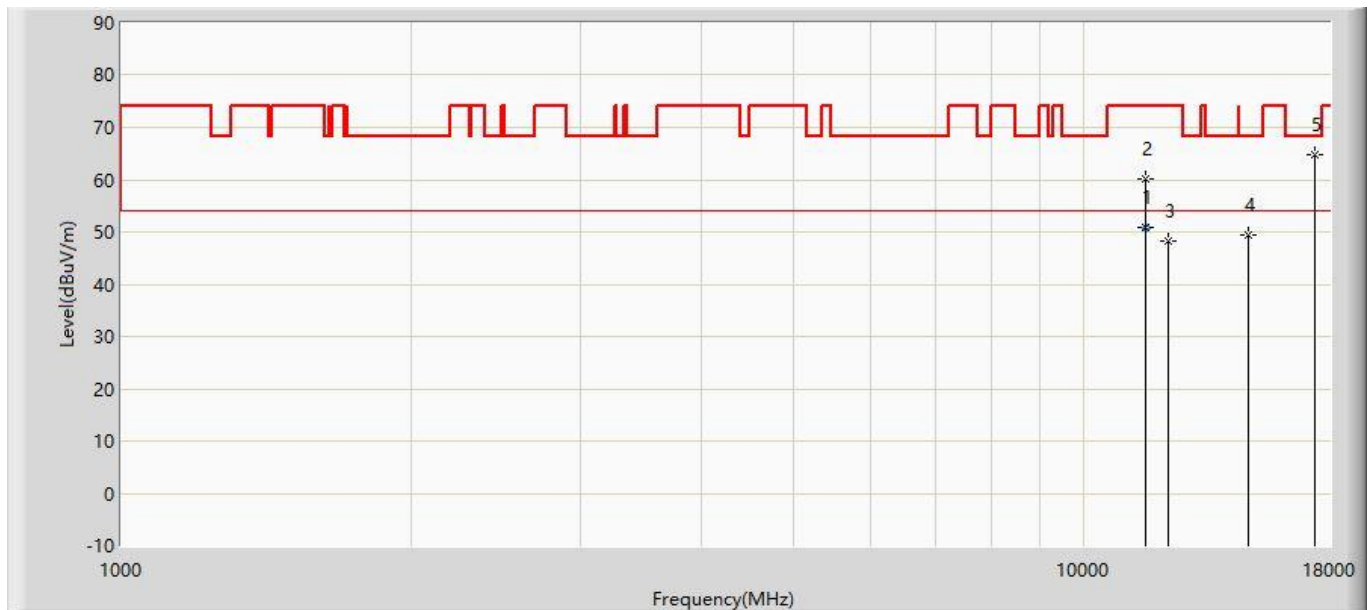


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	11569.550	50.732	32.714	-3.268	54.000	18.018	AV
2			11574.000	60.062	42.046	-13.938	74.000	18.016	PK
3			12228.500	48.350	30.536	-25.650	74.000	17.814	PK
4			14821.000	49.322	28.580	-18.878	68.200	20.742	PK
5			17337.000	64.839	36.141	-3.361	68.200	28.698	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/23 - 11:08
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11a at channel 5825MHz with OAW-AP1322	

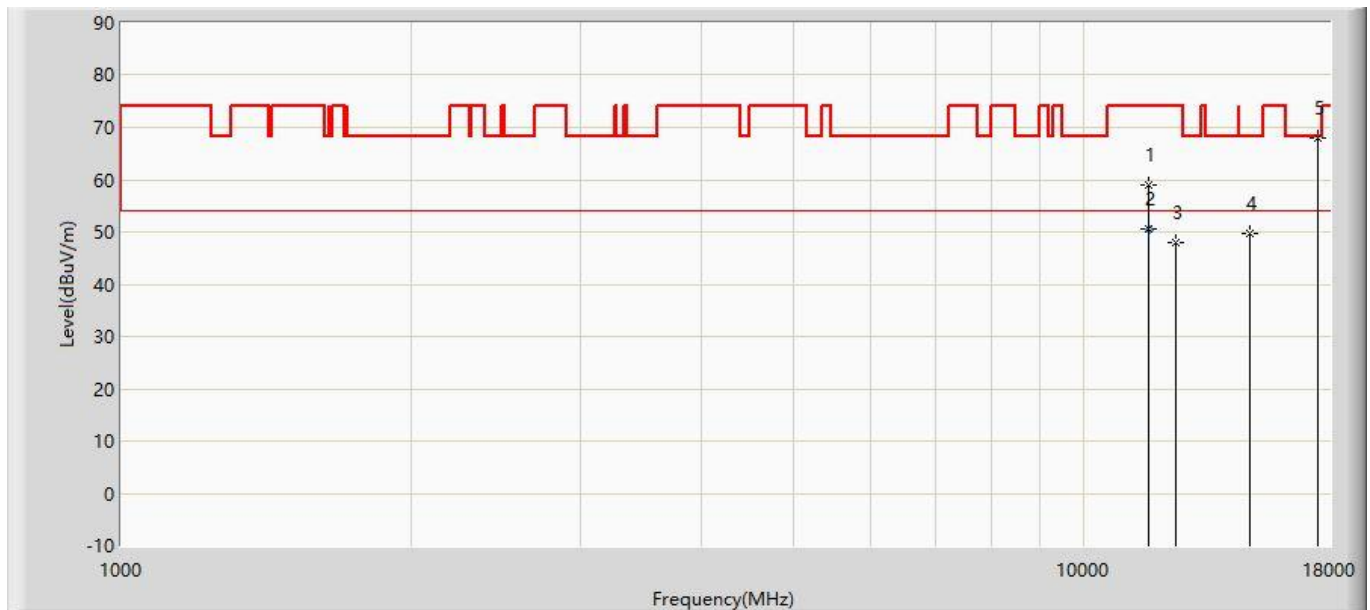


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			11650.500	58.891	40.910	-15.109	74.000	17.981	PK
2			11650.900	50.670	32.689	-3.330	54.000	17.981	AV
3			12449.500	47.879	30.073	-26.121	74.000	17.806	PK
4			14846.500	49.749	29.000	-18.451	68.200	20.749	PK
5		*	17464.500	67.987	38.082	-0.213	68.200	29.905	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/23 - 11:08
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11a at channel 5825MHz with OAW-AP1322	

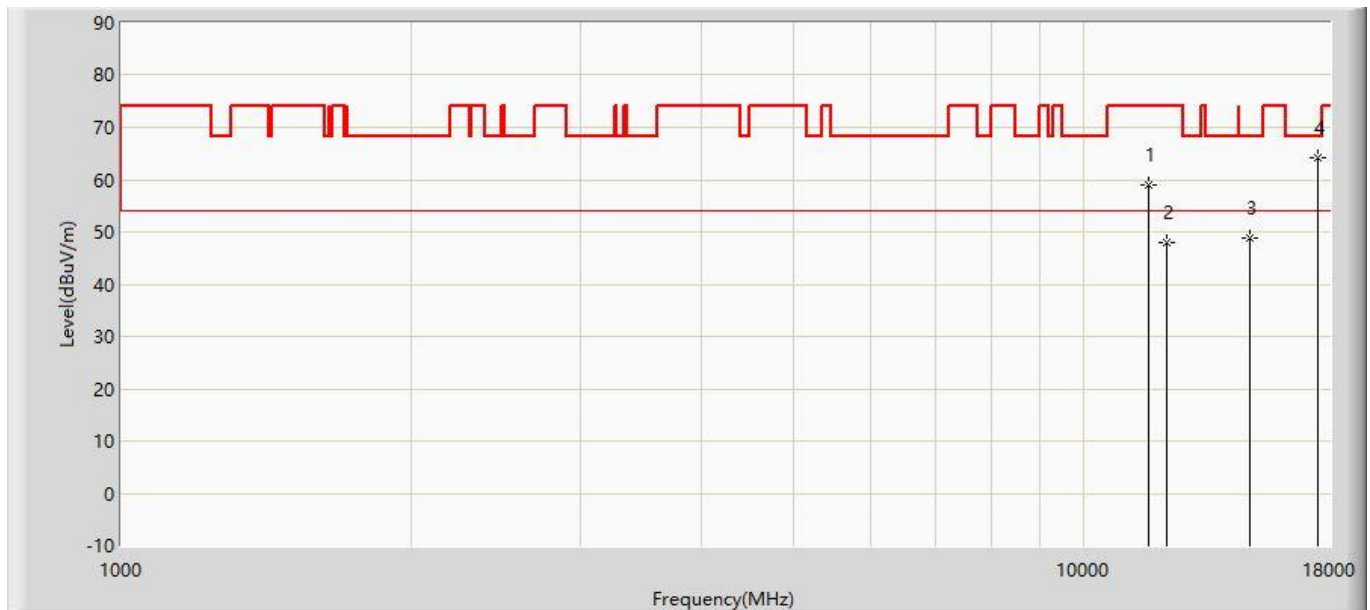


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			11650.500	59.127	41.146	-14.873	74.000	17.981	PK
2			12203.000	47.990	30.177	-26.010	74.000	17.813	PK
3			14880.500	48.898	28.141	-19.302	68.200	20.758	PK
4		*	17473.000	64.078	34.093	-4.122	68.200	29.985	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/23 - 11:08
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT20 at channel 5180MHz with OAW-AP1322	

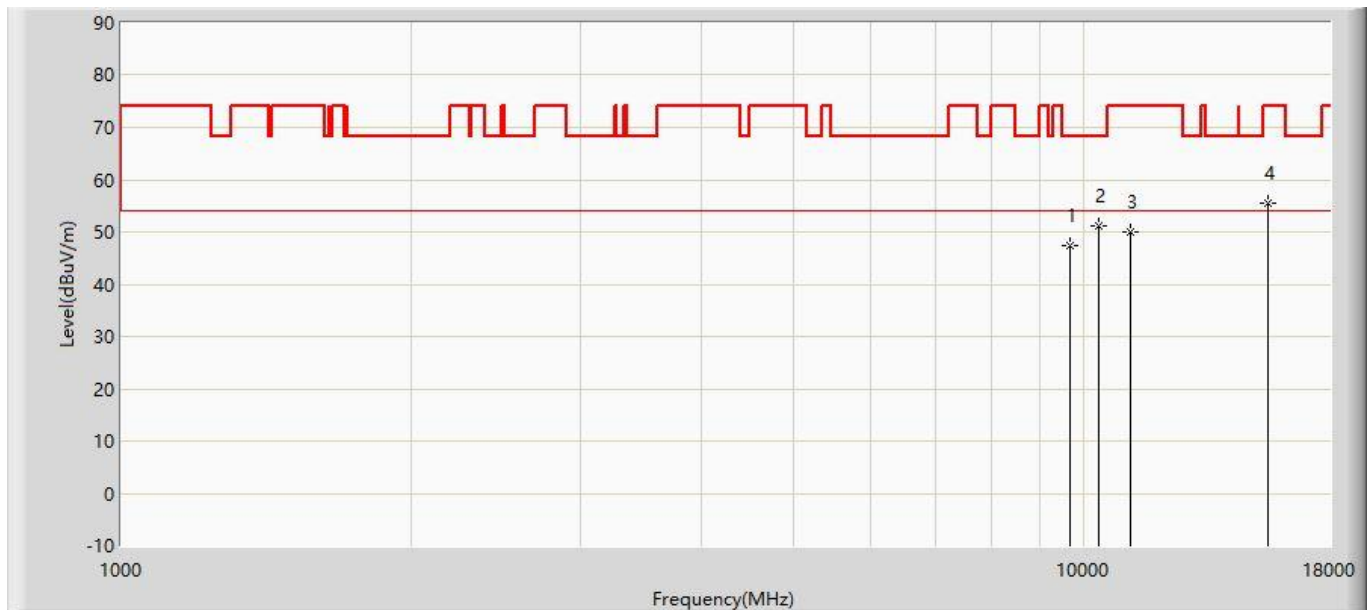


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			9661.500	47.353	33.203	-20.847	68.200	14.151	PK
2		*	10358.500	51.207	34.793	-16.993	68.200	16.414	PK
3			11183.000	49.997	32.245	-24.003	74.000	17.752	PK
4			15543.500	55.366	34.455	-18.634	74.000	20.912	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/23 - 11:08
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT20 at channel 5180MHz with OAW-AP1322	

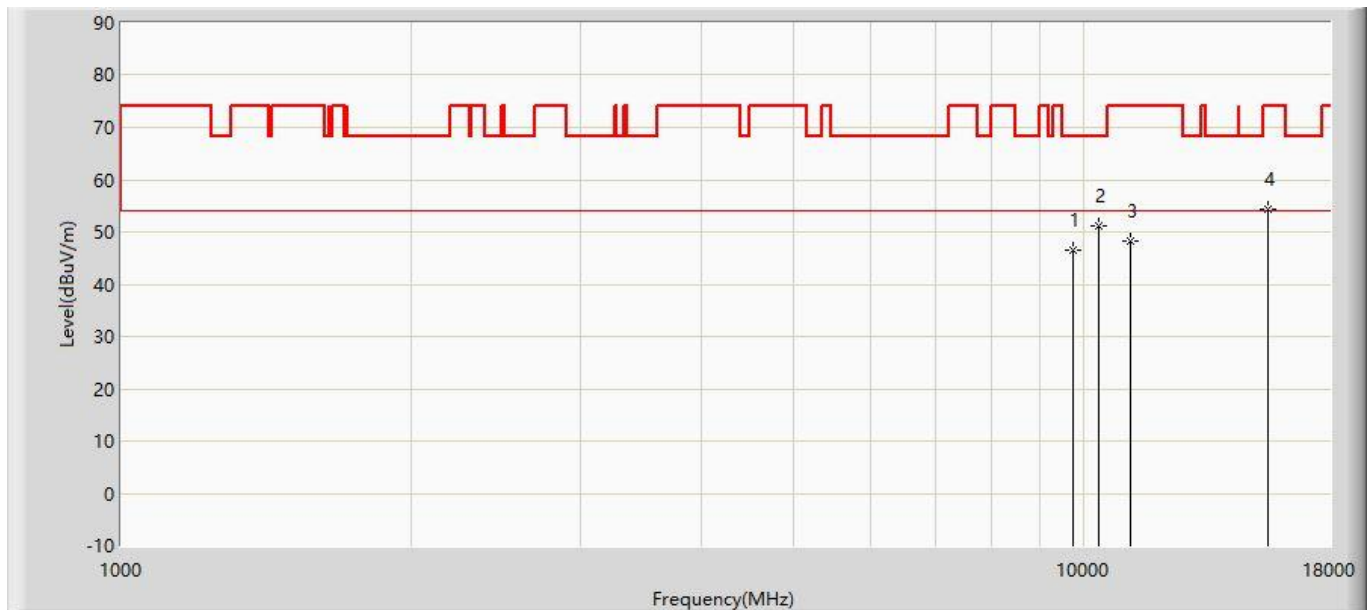


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			9738.000	46.638	32.237	-21.562	68.200	14.401	PK
2		*	10358.500	51.293	34.879	-16.907	68.200	16.414	PK
3			11174.500	48.261	30.517	-25.739	74.000	17.743	PK
4			15526.500	54.314	33.387	-19.686	74.000	20.926	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/23 - 11:08
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT20 at channel 5220MHz with OAW-AP1322	

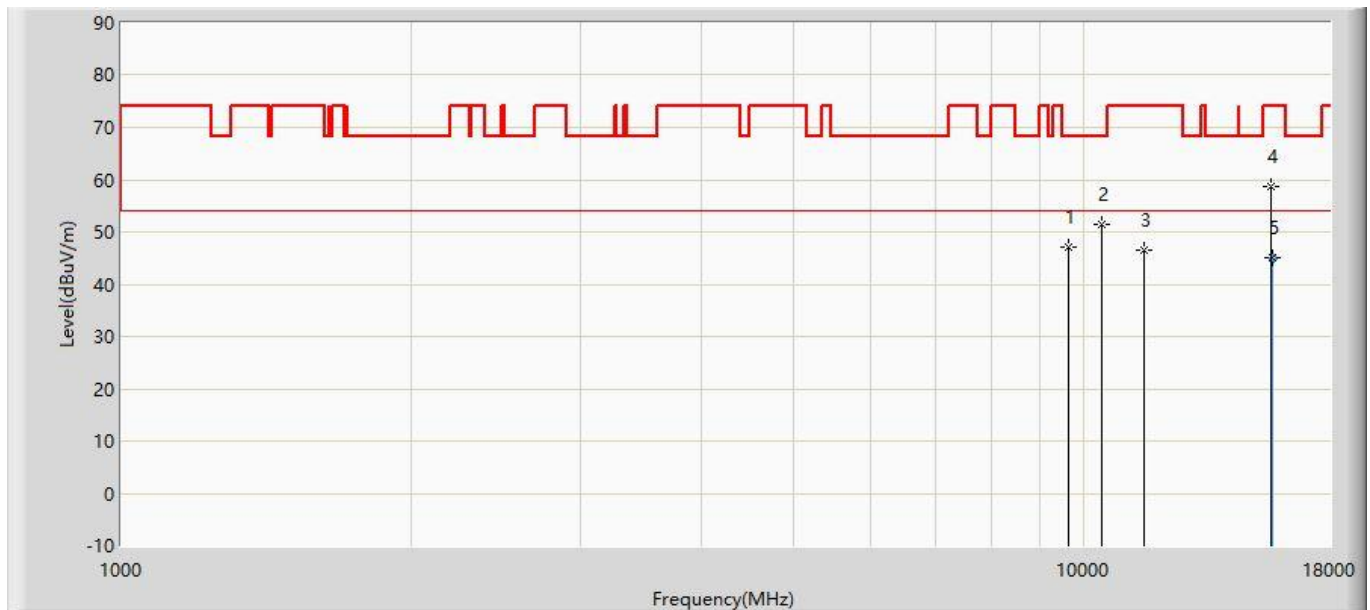


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			9644.500	47.093	32.999	-21.107	68.200	14.094	PK
2			10443.500	51.494	34.806	-16.706	68.200	16.688	PK
3			11531.500	46.492	28.456	-27.508	74.000	18.036	PK
4			15654.000	58.816	38.001	-15.184	74.000	20.815	PK
5		*	15664.300	44.933	24.128	-9.067	54.000	20.805	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/23 - 11:08
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT20 at channel 5220MHz with OAW-AP1322	

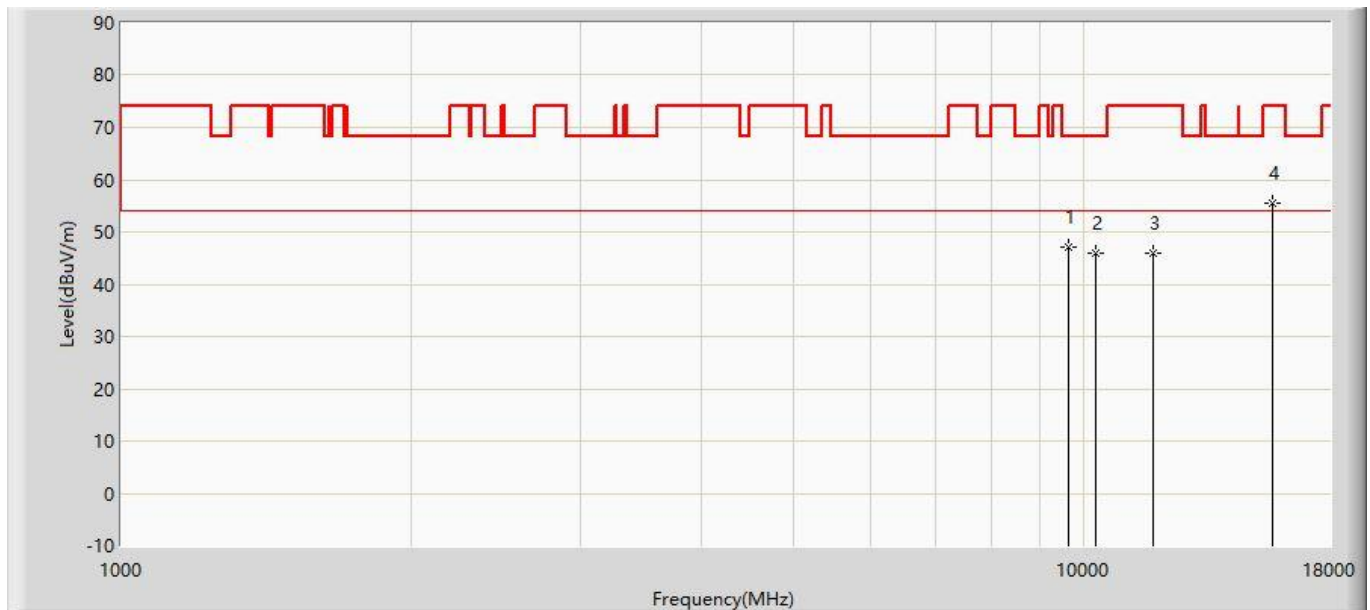


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			9644.500	47.093	32.999	-21.107	68.200	14.094	PK
2			10273.500	45.871	29.731	-22.329	68.200	16.140	PK
3			11786.500	45.960	28.041	-28.040	74.000	17.918	PK
4		*	15671.000	55.370	34.571	-18.630	74.000	20.799	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/23 - 11:08
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT20 at channel 5240MHz with OAW-AP1322	

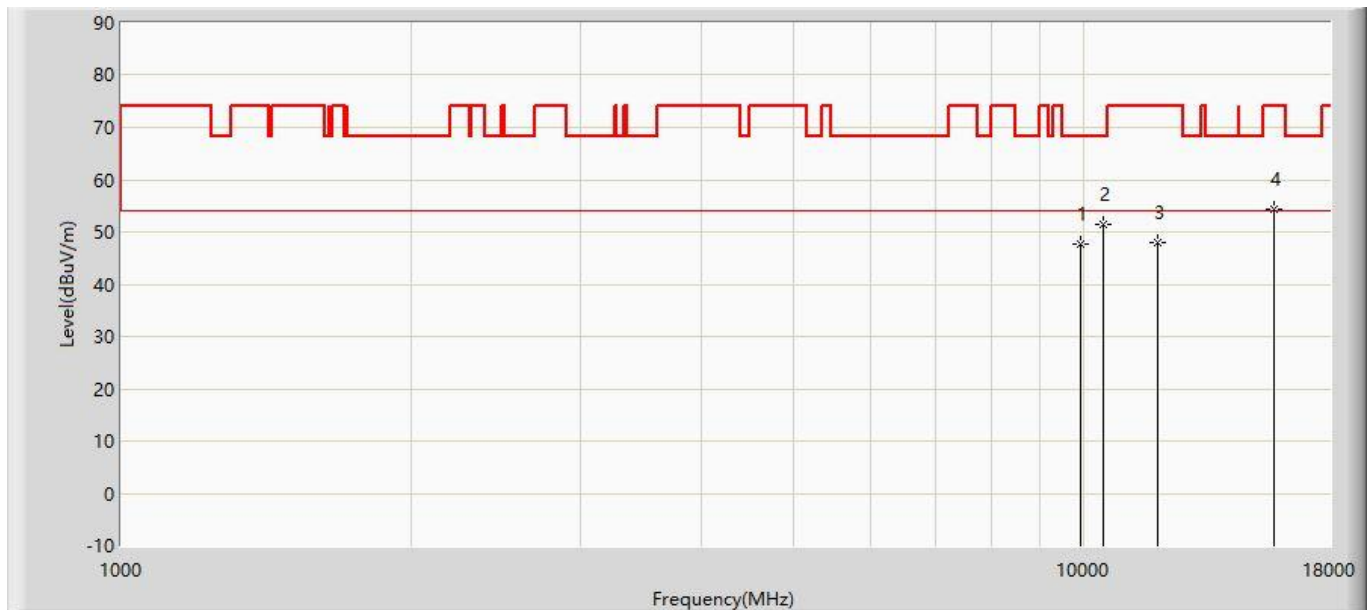


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			9933.500	47.606	32.565	-20.594	68.200	15.041	PK
2		*	10477.500	51.348	34.551	-16.852	68.200	16.797	PK
3			11922.500	48.038	30.182	-25.962	74.000	17.856	PK
4			15722.000	54.234	33.480	-19.766	74.000	20.754	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/23 - 11:09
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT20 at channel 5240MHz with OAW-AP1322	

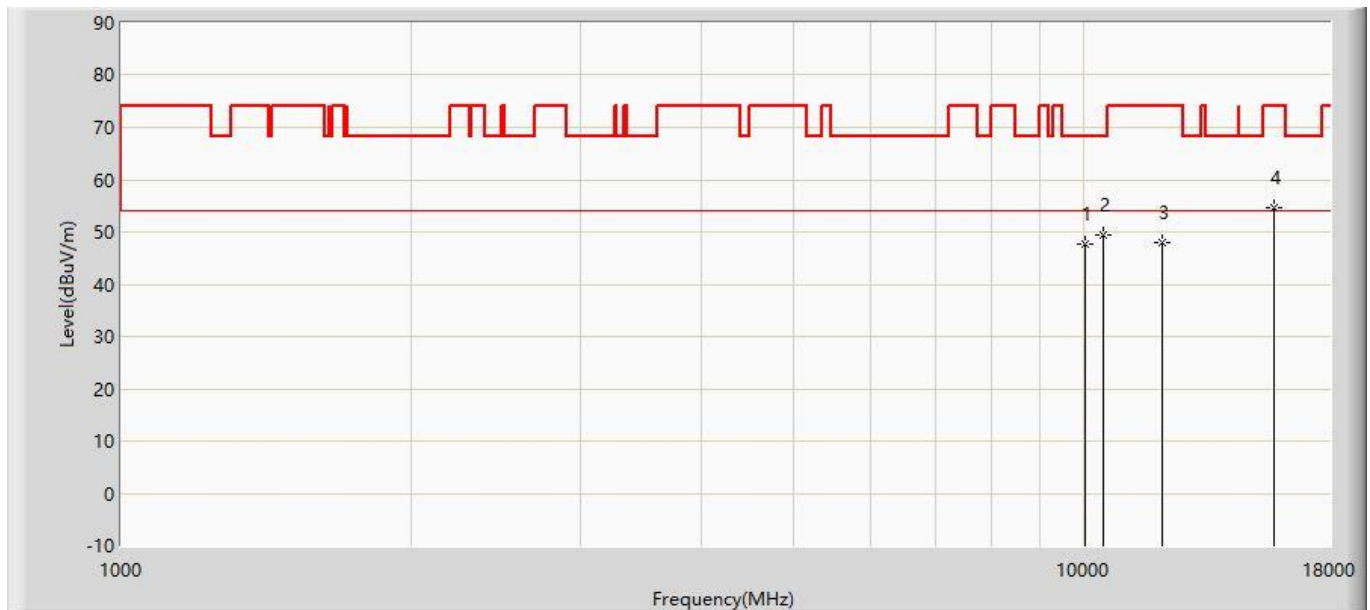


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			10018.500	47.619	32.300	-20.581	68.200	15.318	PK
2		*	10477.500	49.497	32.700	-18.703	68.200	16.797	PK
3			12058.500	47.947	30.129	-26.053	74.000	17.818	PK
4			15730.500	54.759	34.012	-19.241	74.000	20.747	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/23 - 11:09
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT20 at channel 5260MHz with OAW-AP1322	

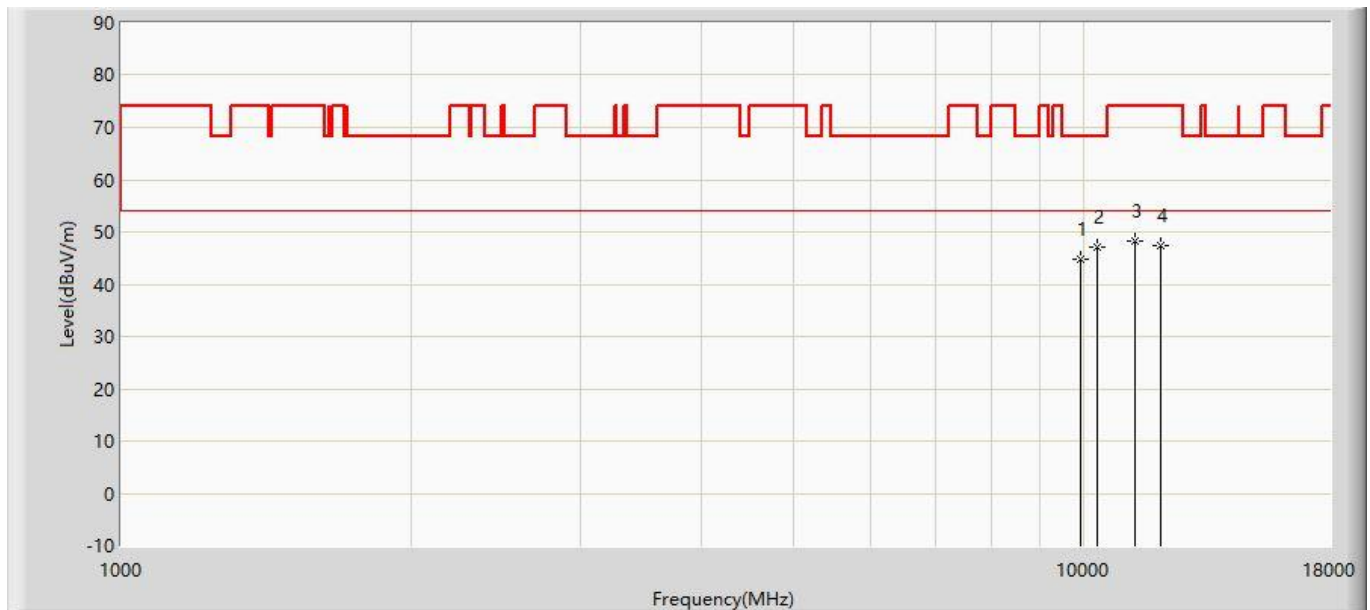


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			9899.500	44.784	29.853	-23.416	68.200	14.931	PK
2		*	10324.500	47.182	30.877	-21.018	68.200	16.305	PK
3			11310.500	48.348	30.476	-25.652	74.000	17.873	PK
4			12016.000	47.493	29.674	-26.507	74.000	17.819	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/23 - 11:09
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT20 at channel 5260MHz with OAW-AP1322	

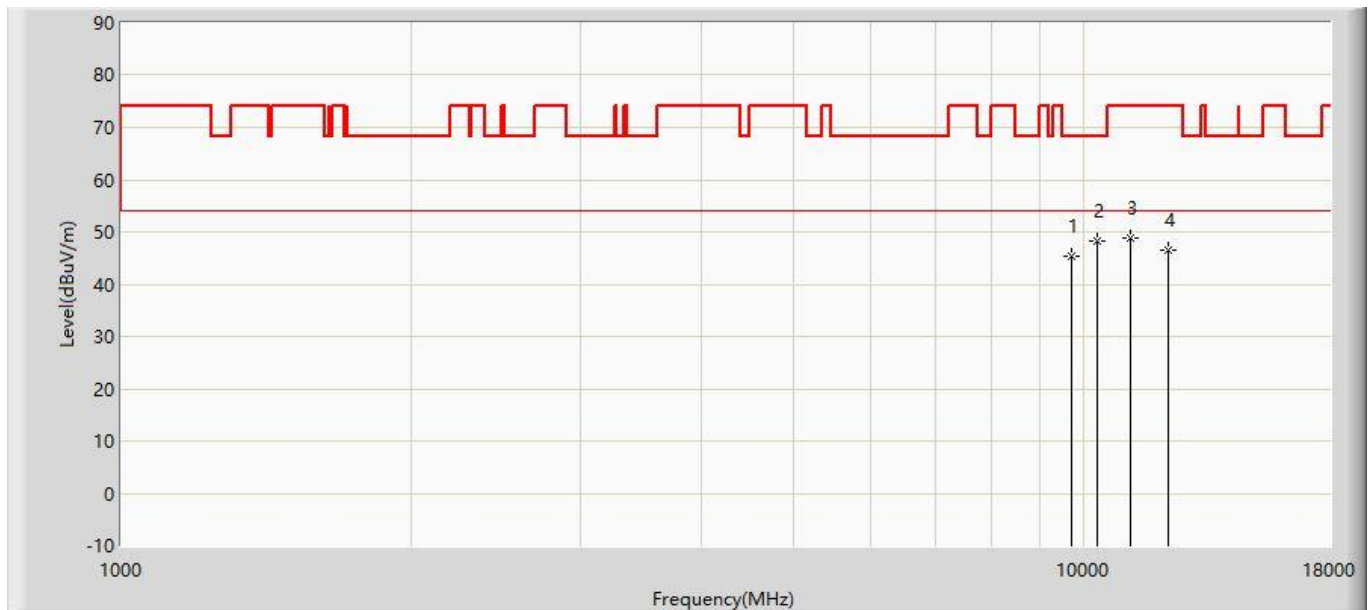


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			9721.000	45.246	30.901	-22.954	68.200	14.345	PK
2		*	10333.000	48.403	32.070	-19.797	68.200	16.333	PK
3			11157.500	48.703	30.975	-25.297	74.000	17.728	PK
4			12220.000	46.640	28.826	-27.360	74.000	17.814	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/23 - 11:09
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT20 at channel 5300MHz with OAW-AP1322	

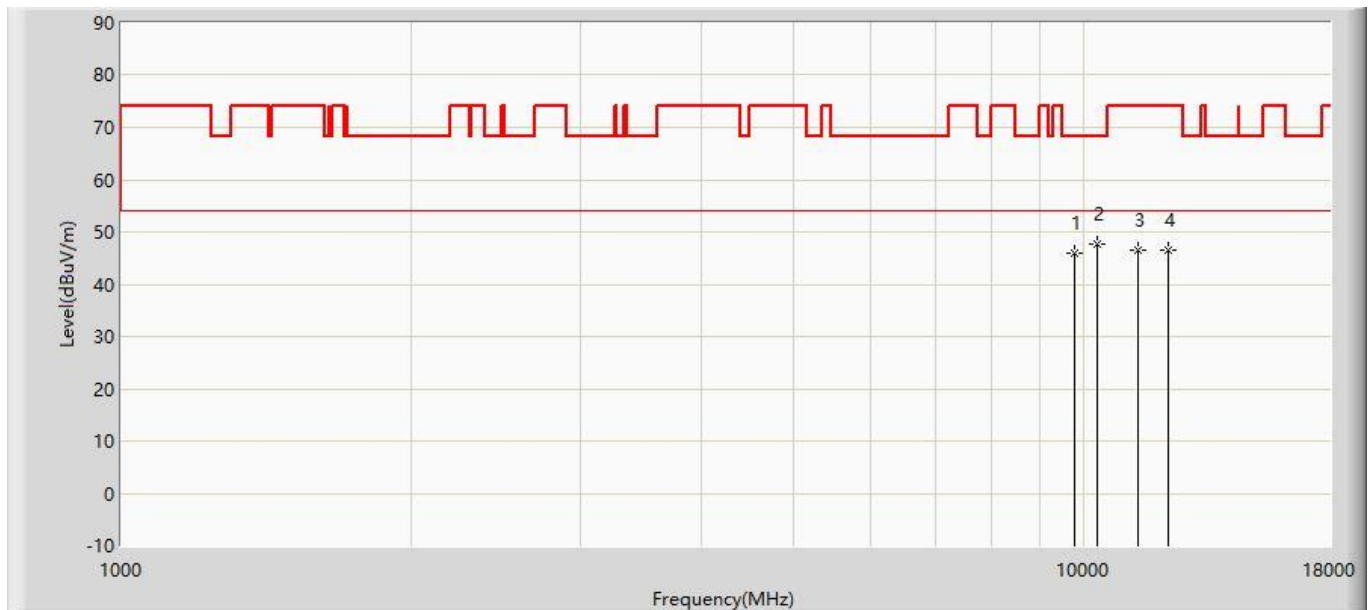


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			9763.500	45.983	31.499	-22.217	68.200	14.485	PK
2		*	10324.500	47.810	31.505	-20.390	68.200	16.305	PK
3			11395.500	46.561	28.609	-27.439	74.000	17.953	PK
4			12220.000	46.640	28.826	-27.360	74.000	17.814	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/23 - 11:09
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT20 at channel 5300MHz with OAW-AP1322	

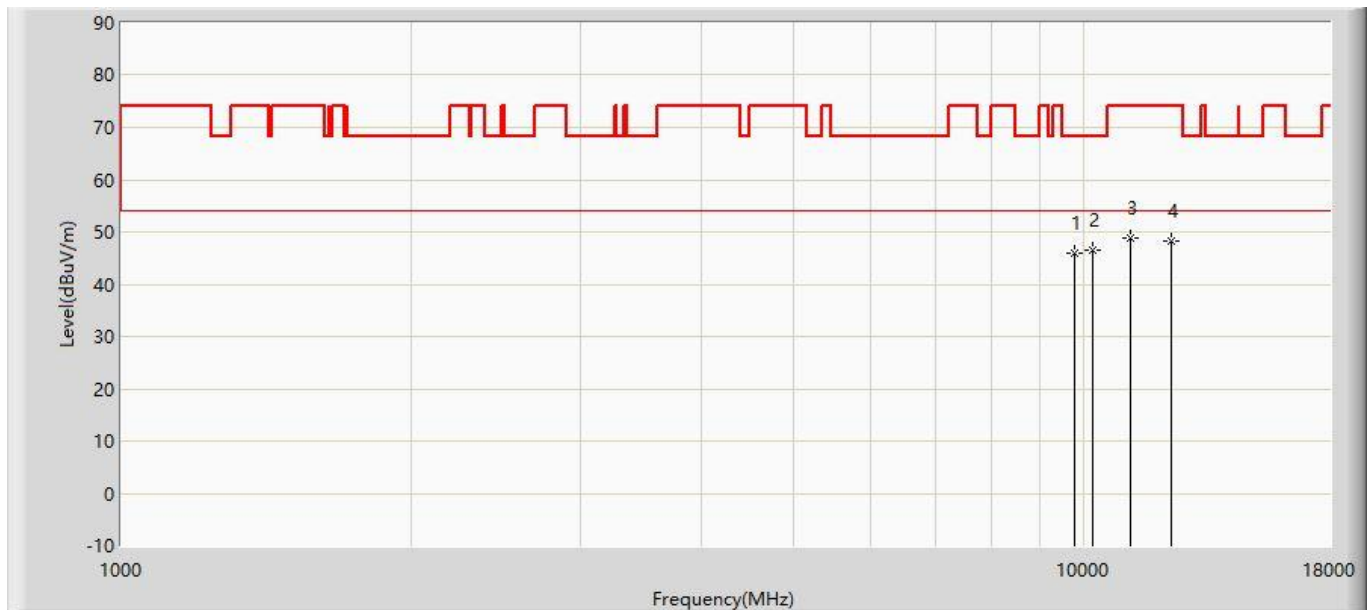


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			9763.500	45.983	31.499	-22.217	68.200	14.485	PK
2		*	10222.500	46.544	30.567	-21.656	68.200	15.976	PK
3			11174.500	48.720	30.976	-25.280	74.000	17.743	PK
4			12313.500	48.334	30.523	-25.666	74.000	17.812	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/23 - 11:09
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT20 at channel 5320MHz with OAW-AP1322	

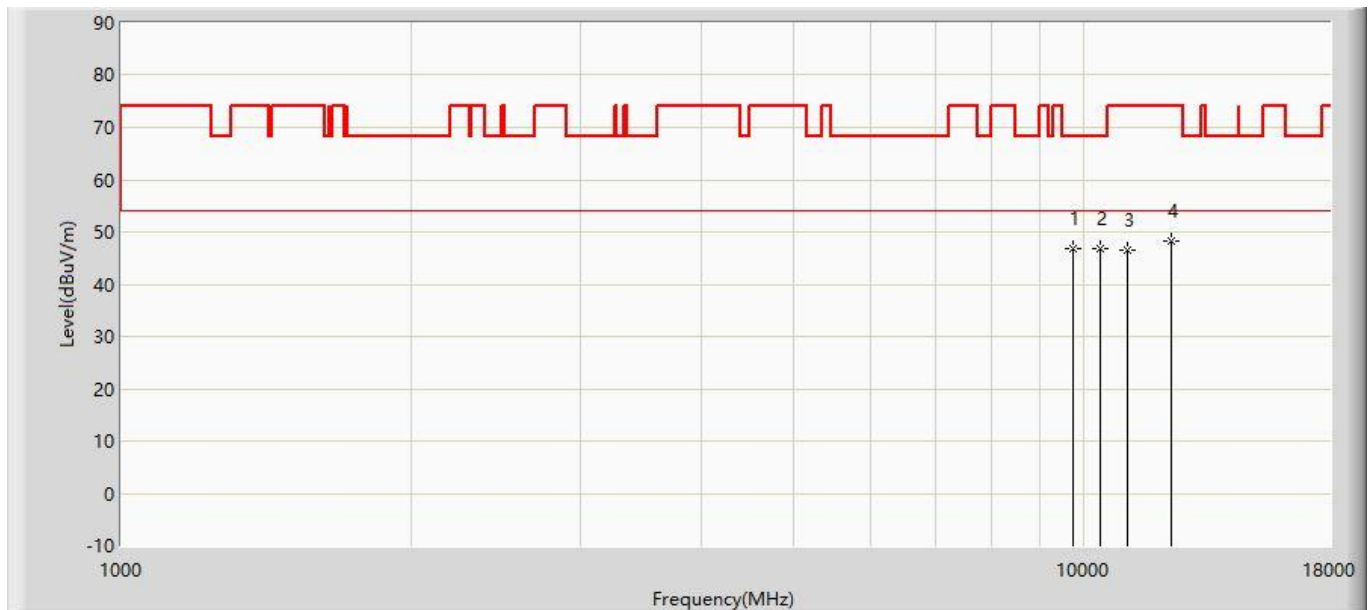


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	9746.500	46.809	32.380	-21.391	68.200	14.428	PK
2			10409.500	46.763	30.184	-21.437	68.200	16.579	PK
3			11089.500	46.635	28.971	-27.365	74.000	17.665	PK
4			12313.500	48.334	30.523	-25.666	74.000	17.812	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/23 - 11:09
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT20 at channel 5320MHz with OAW-AP1322	

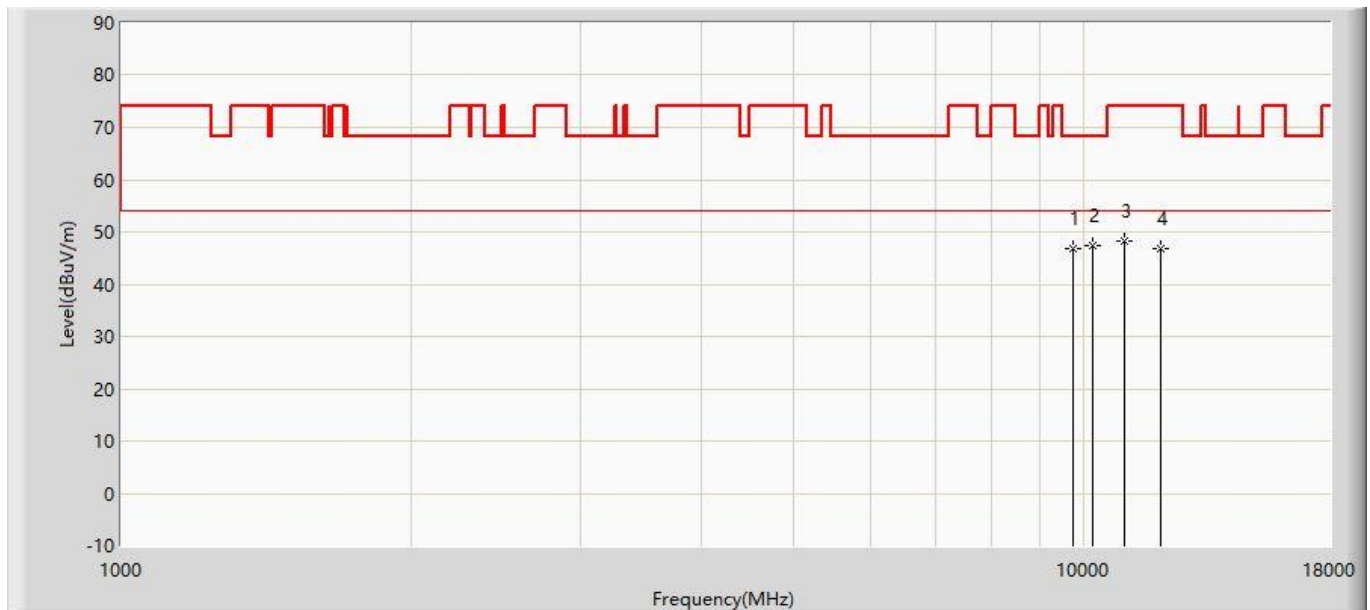


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			9746.500	46.809	32.380	-21.391	68.200	14.428	PK
2		*	10214.000	47.496	31.547	-20.704	68.200	15.949	PK
3			11004.500	48.215	30.631	-25.785	74.000	17.584	PK
4			12016.000	46.918	29.099	-27.082	74.000	17.819	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/23 - 11:09
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT20 at channel 5500MHz with OAW-AP1322	

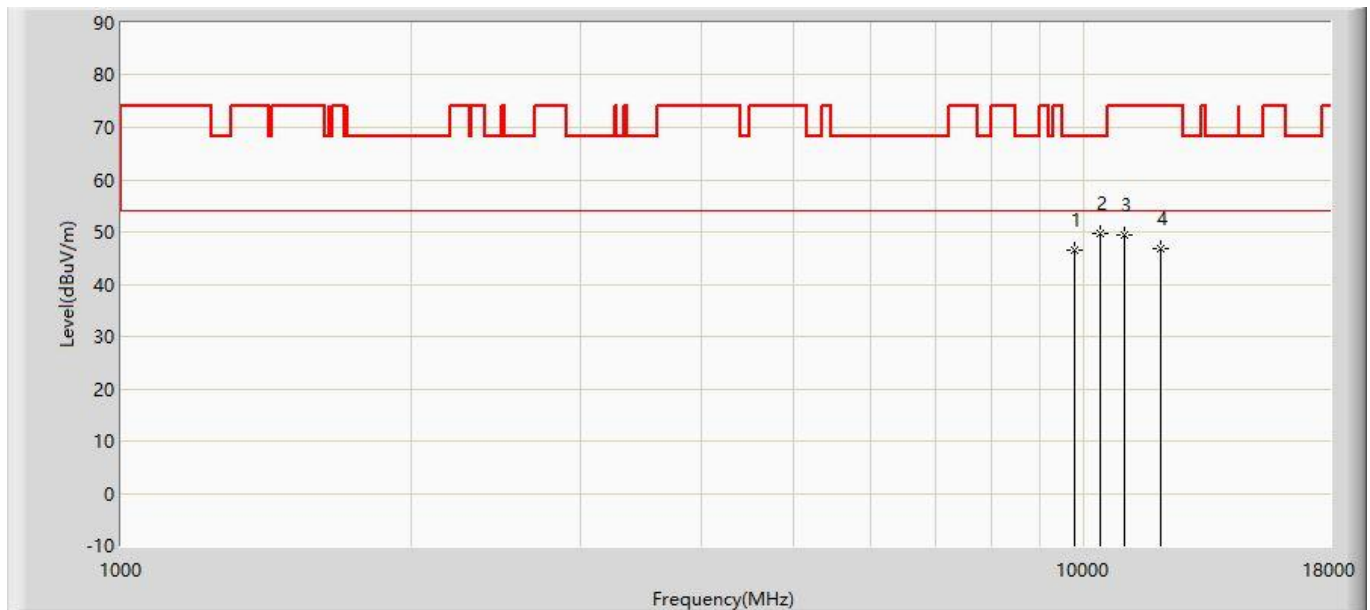


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			9772.000	46.484	31.972	-21.716	68.200	14.512	PK
2		*	10401.000	49.702	33.151	-18.498	68.200	16.551	PK
3			11004.500	49.407	31.823	-24.593	74.000	17.584	PK
4			12016.000	46.918	29.099	-27.082	74.000	17.819	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/23 - 11:09
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT20 at channel 5500MHz with OAW-AP1322	

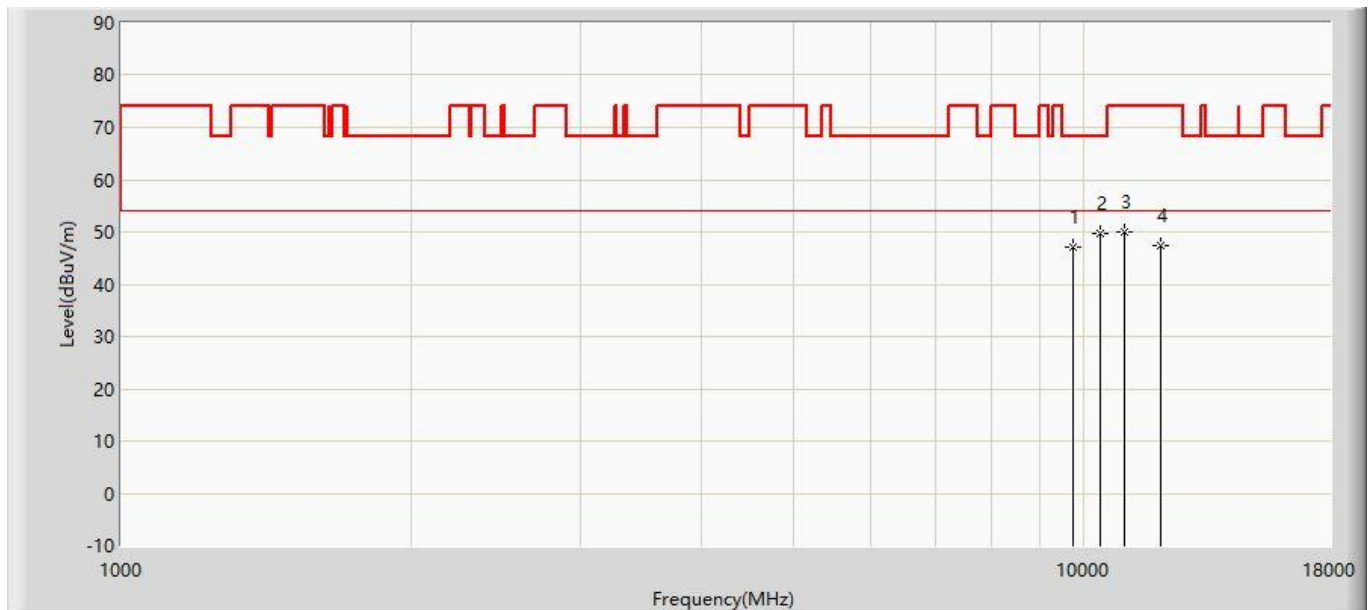


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			9738.000	47.159	32.758	-21.041	68.200	14.401	PK
2		*	10401.000	49.702	33.151	-18.498	68.200	16.551	PK
3			10996.000	50.104	32.529	-23.896	74.000	17.575	PK
4			12024.500	47.370	29.551	-26.630	74.000	17.819	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/23 - 11:09
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT20 at channel 5600MHz with OAW-AP1322	

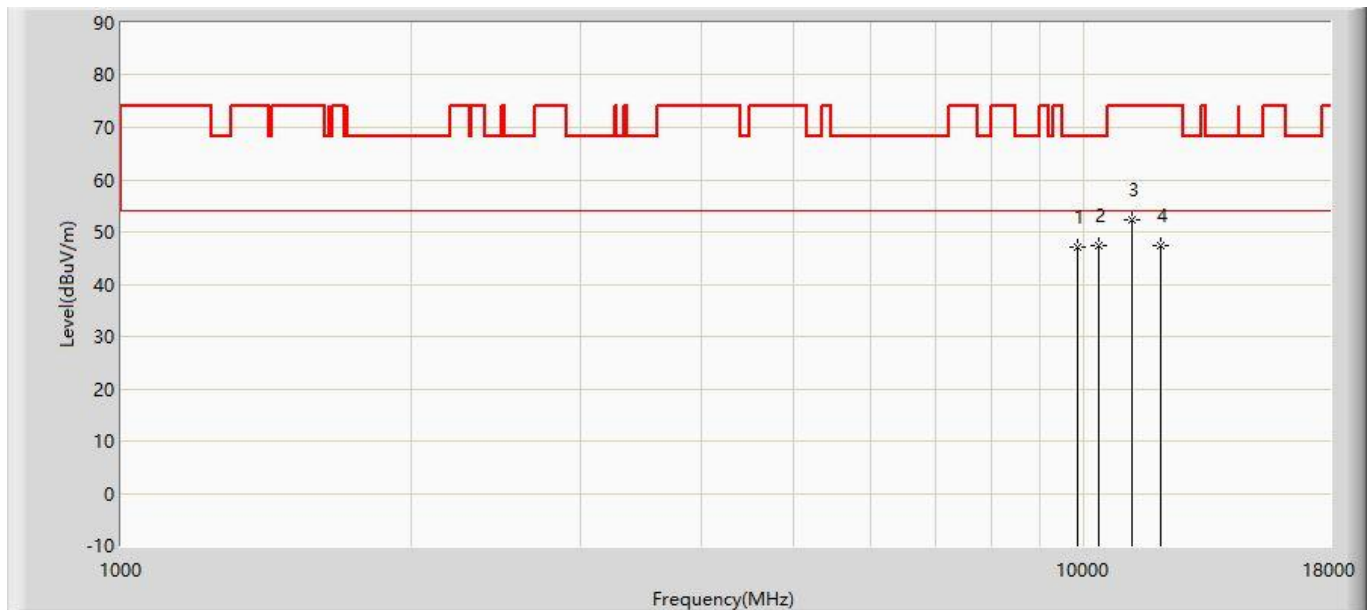


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			9857.000	47.156	32.366	-21.044	68.200	14.790	PK
2		*	10367.000	47.469	31.028	-20.731	68.200	16.441	PK
3			11200.000	52.176	34.408	-21.824	74.000	17.768	PK
4			12007.500	47.481	29.662	-26.519	74.000	17.820	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/23 - 11:09
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT20 at channel 5600MHz with OAW-AP1322	

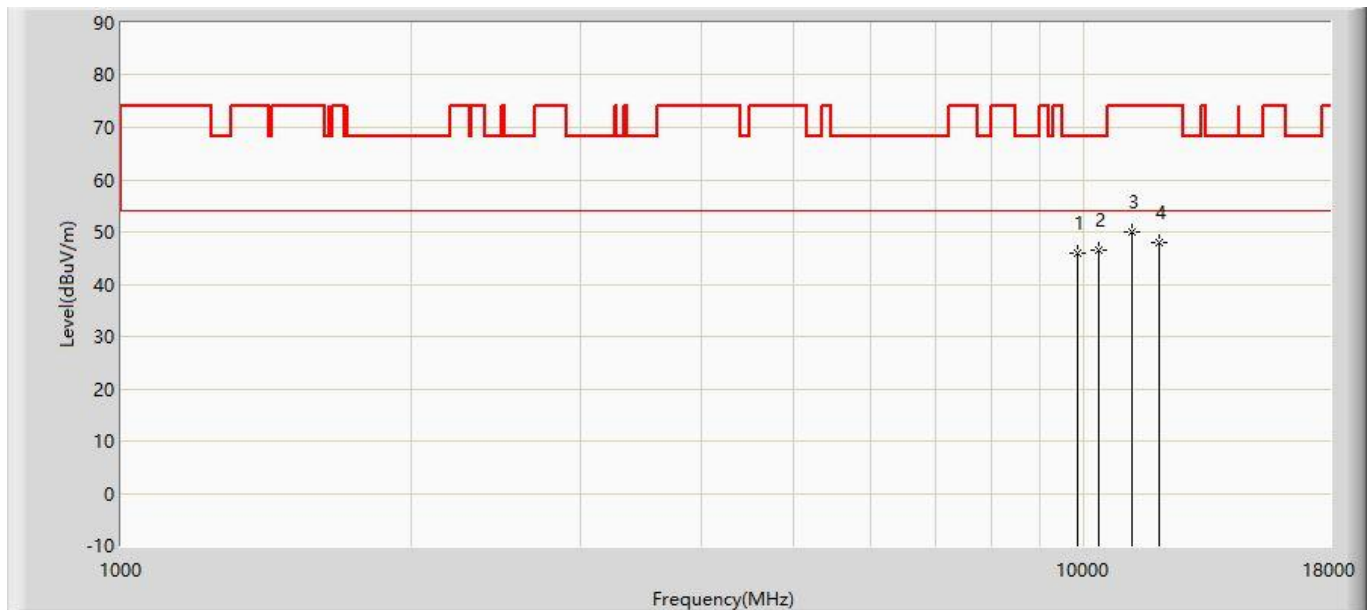


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			9857.000	45.987	31.197	-22.213	68.200	14.790	PK
2		*	10350.000	46.592	30.205	-21.608	68.200	16.387	PK
3			11200.000	50.015	32.247	-23.985	74.000	17.768	PK
4			11948.000	48.044	30.200	-25.956	74.000	17.844	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/23 - 11:10
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT20 at channel 5700MHz with OAW-AP1322	

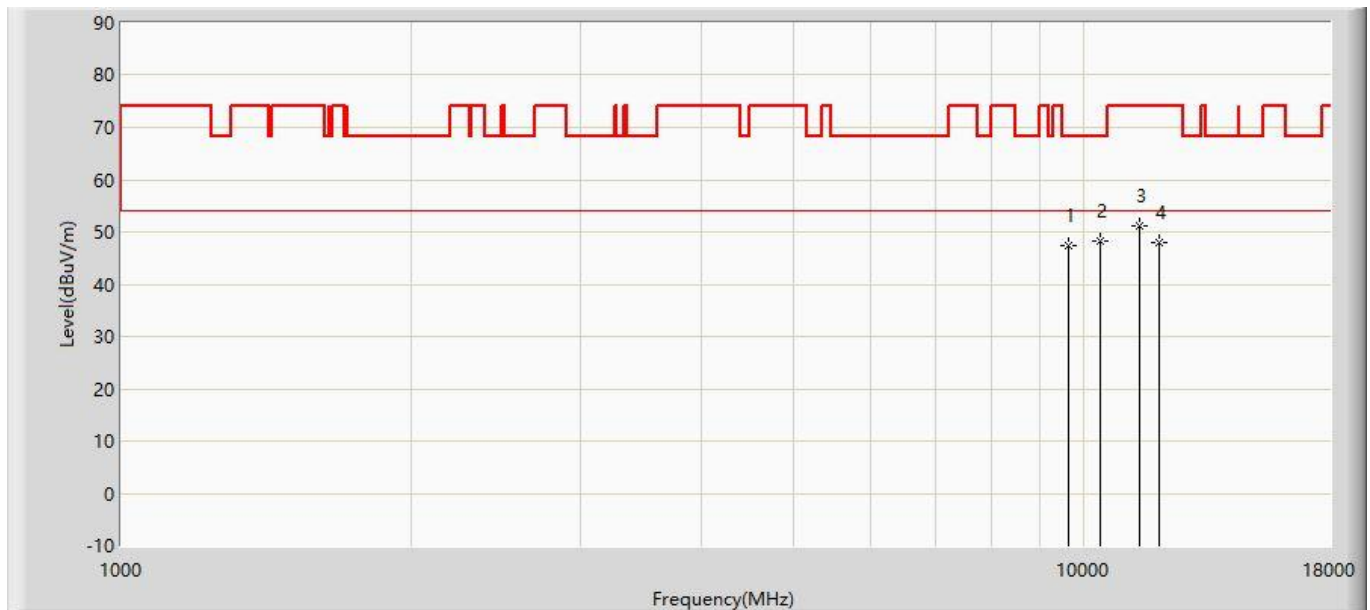


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			9636.000	47.322	33.256	-20.878	68.200	14.066	PK
2		*	10384.000	48.240	31.744	-19.960	68.200	16.496	PK
3			11404.000	51.254	33.294	-22.746	74.000	17.960	PK
4			11948.000	48.044	30.200	-25.956	74.000	17.844	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/23 - 11:10
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT20 at channel 5700MHz with OAW-AP1322	

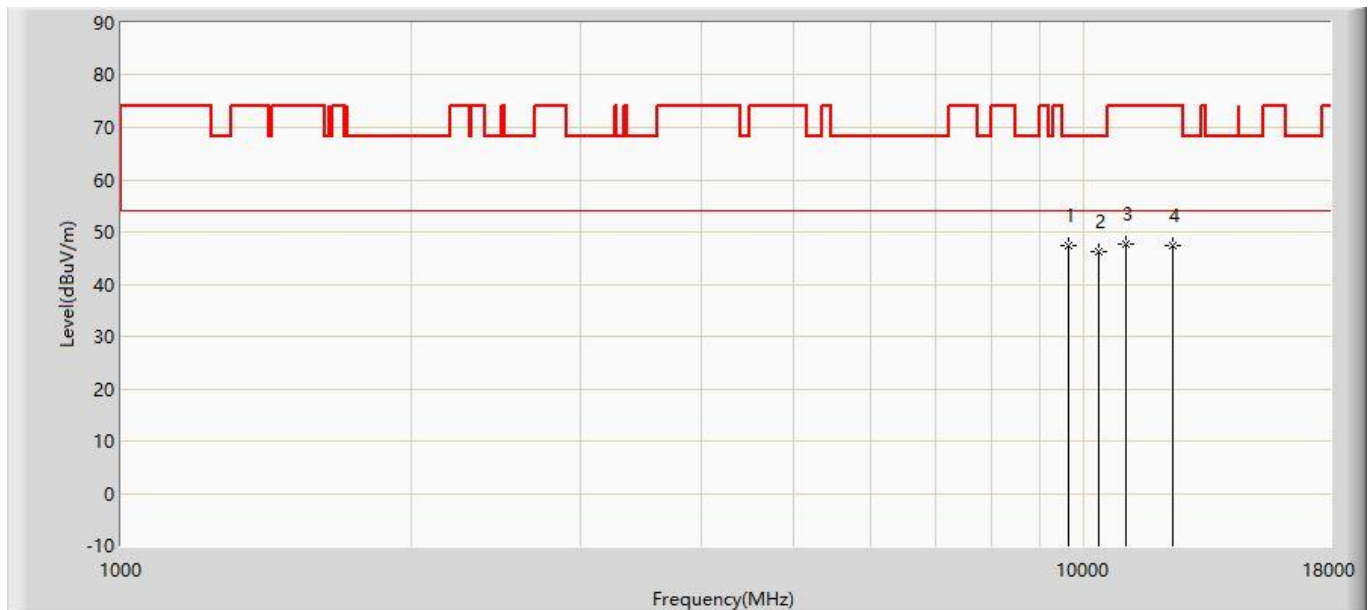


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	9636.000	47.322	33.256	-20.878	68.200	14.066	PK
2			10350.000	46.211	29.824	-21.989	68.200	16.387	PK
3			11055.500	47.799	30.167	-26.201	74.000	17.632	PK
4			12381.500	47.248	29.439	-26.752	74.000	17.808	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/23 - 11:10
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT20 at channel 5720MHz with OAW-AP1322	

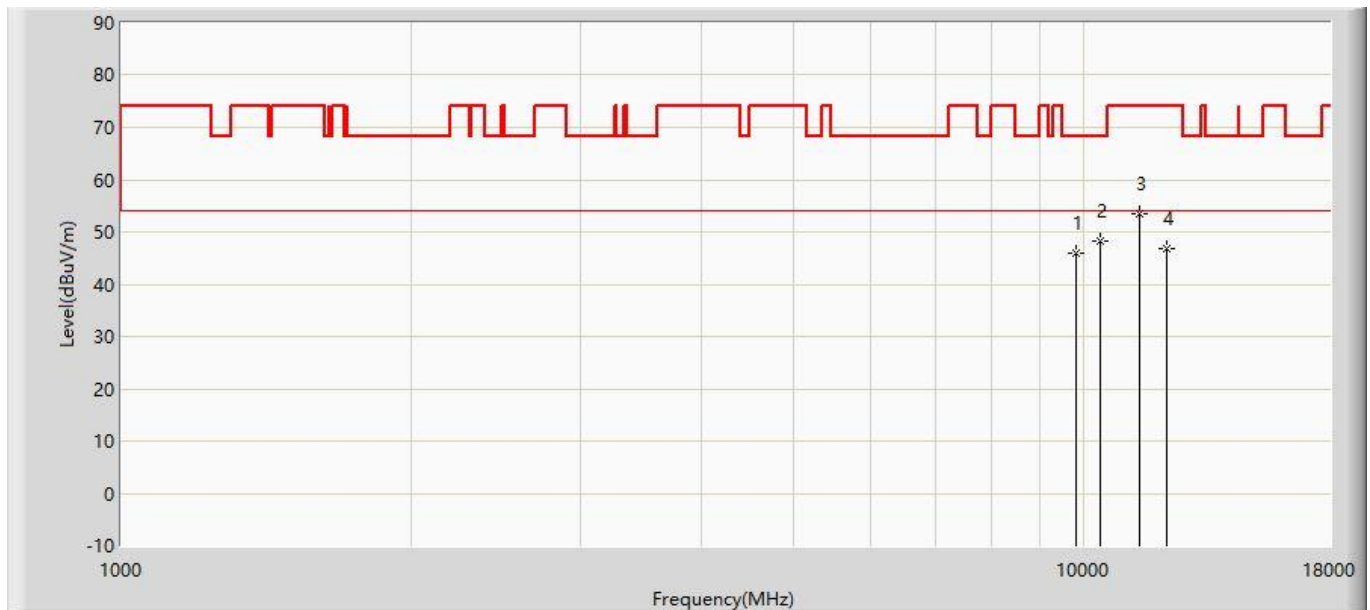


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			9814.500	45.811	31.159	-22.389	68.200	14.652	PK
2		*	10375.500	48.173	31.704	-20.027	68.200	16.470	PK
3			11438.000	53.490	35.499	-20.510	74.000	17.991	PK
4			12169.000	46.834	29.018	-27.166	74.000	17.816	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/23 - 11:10
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT20 at channel 5720MHz with OAW-AP1322	

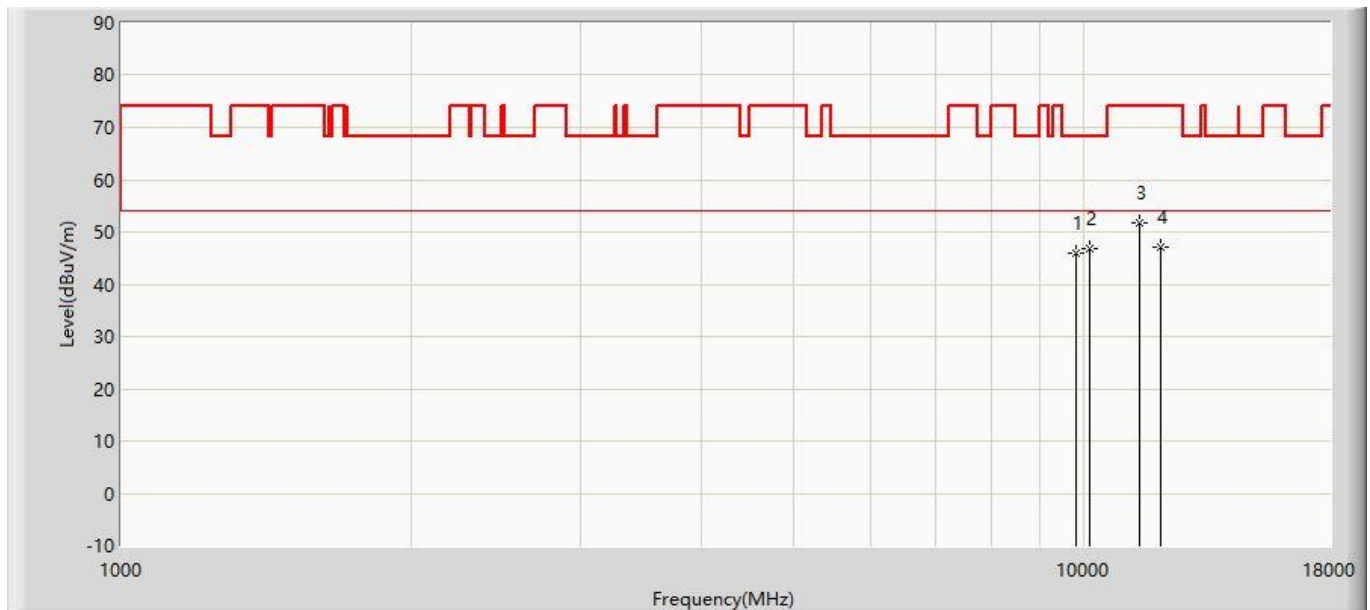


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			9814.500	45.811	31.159	-22.389	68.200	14.652	PK
2		*	10137.500	46.716	31.013	-21.484	68.200	15.702	PK
3			11438.000	51.810	33.819	-22.190	74.000	17.991	PK
4			12016.000	47.145	29.326	-26.855	74.000	17.819	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/23 - 11:10
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT20 at channel 5745MHz with OAW-AP1322	

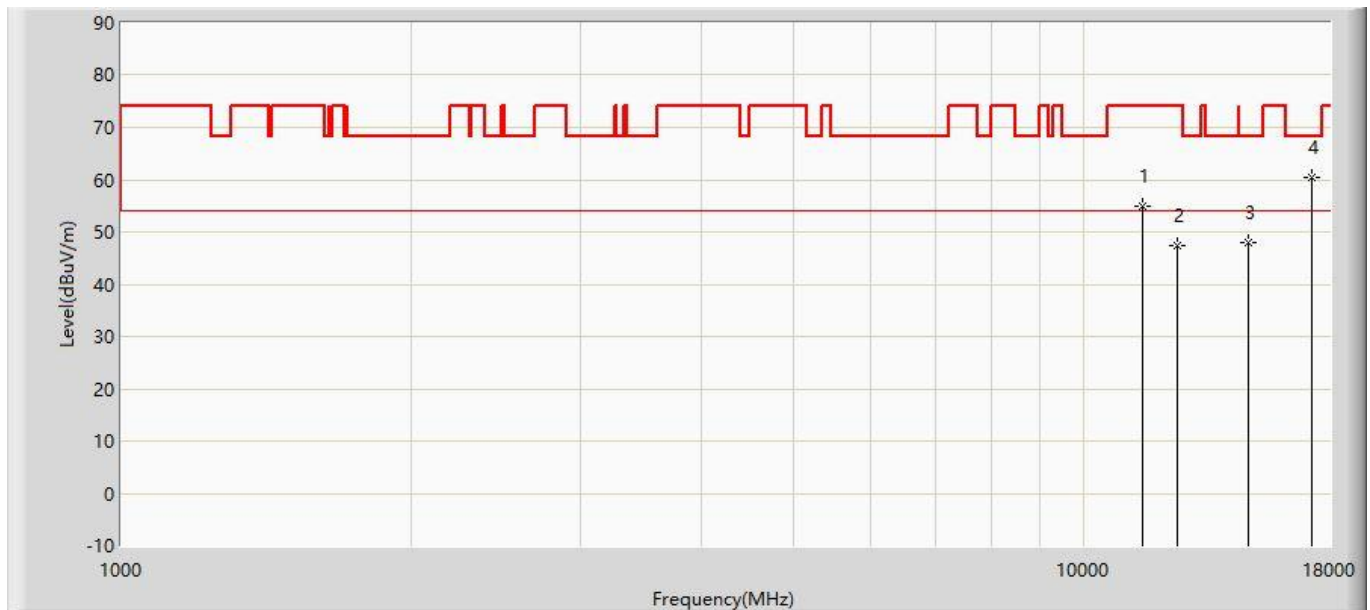


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			11489.000	54.848	36.808	-19.152	74.000	18.040	PK
2			12475.000	47.481	29.675	-26.519	74.000	17.806	PK
3			14812.500	47.982	27.242	-20.218	68.200	20.739	PK
4		*	17226.500	60.313	32.660	-7.887	68.200	27.653	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/23 - 11:10
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT20 at channel 5745MHz with OAW-AP1322	

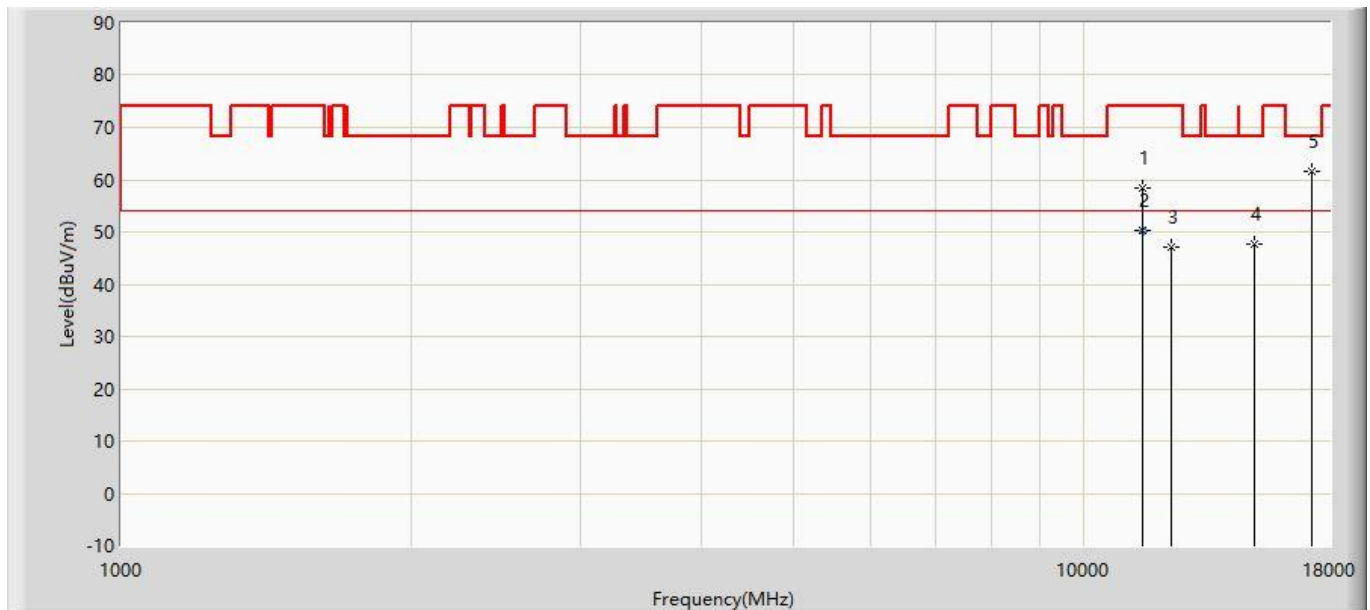


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			11489.000	58.472	40.432	-15.528	74.000	18.040	PK
2		*	11491.450	50.216	32.175	-3.784	54.000	18.041	AV
3			12339.000	47.204	29.394	-26.796	74.000	17.810	PK
4			15025.000	47.685	26.887	-20.515	68.200	20.798	PK
5			17226.500	61.579	33.926	-6.621	68.200	27.653	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/23 - 11:10
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT20 at channel 5785MHz with OAW-AP1322	

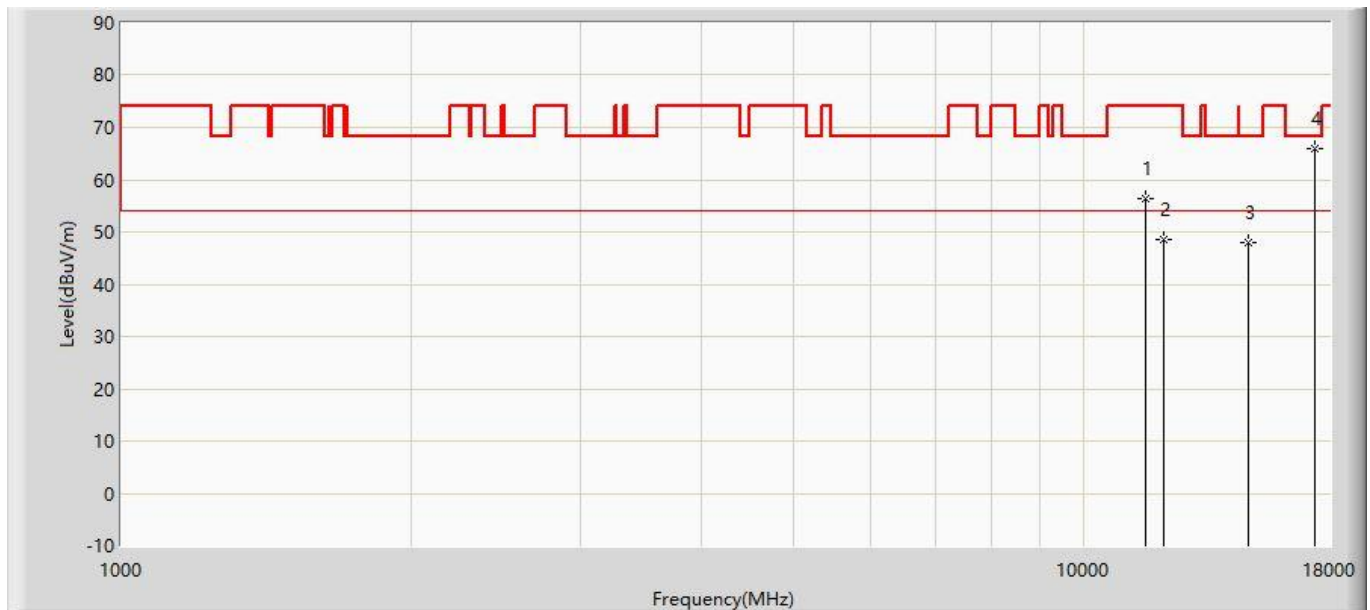


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			11565.500	56.381	38.361	-17.619	74.000	18.020	PK
2			12109.500	48.658	30.842	-25.342	74.000	17.816	PK
3			14812.500	47.942	27.202	-20.258	68.200	20.739	PK
4		*	17354.000	66.058	37.200	-2.142	68.200	28.858	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/23 - 11:10
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT20 at channel 5785MHz with OAW-AP1322	

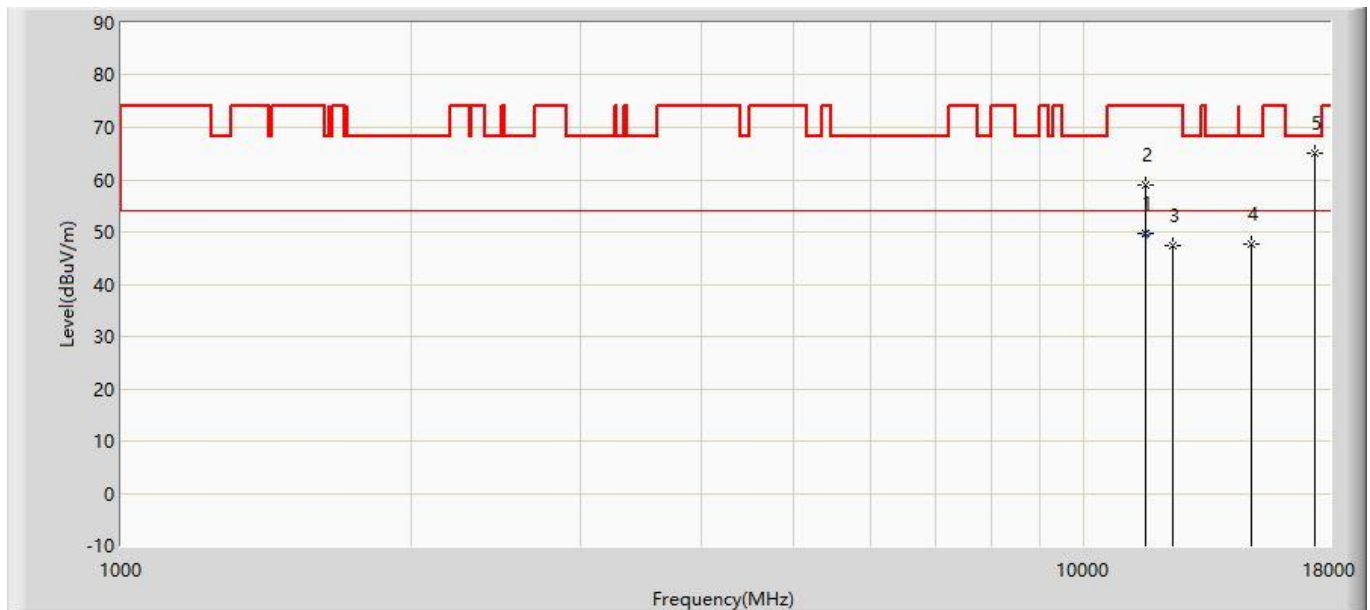

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			11563.100	49.699	31.678	-4.301	54.000	18.021	AV
2			11574.000	59.103	41.087	-14.897	74.000	18.016	PK
3			12373.000	47.453	29.644	-26.547	74.000	17.809	PK
4			14914.500	47.788	27.021	-20.412	68.200	20.767	PK
5		*	17362.500	65.120	36.181	-3.080	68.200	28.939	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)