






Tx. Spurious NVNT ac40 5230MHz MIMO @ 5251MHz-5270MHz

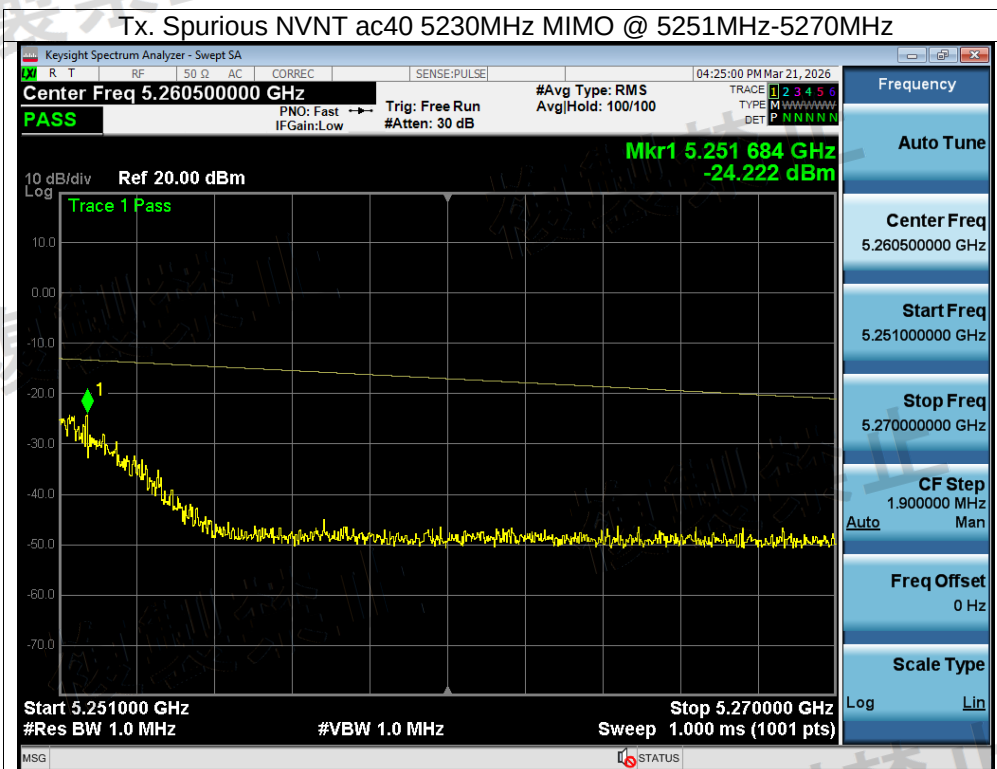


Tx. Spurious NVNT ac40 5230MHz MIMO @ 5270MHz-5278.4MHz

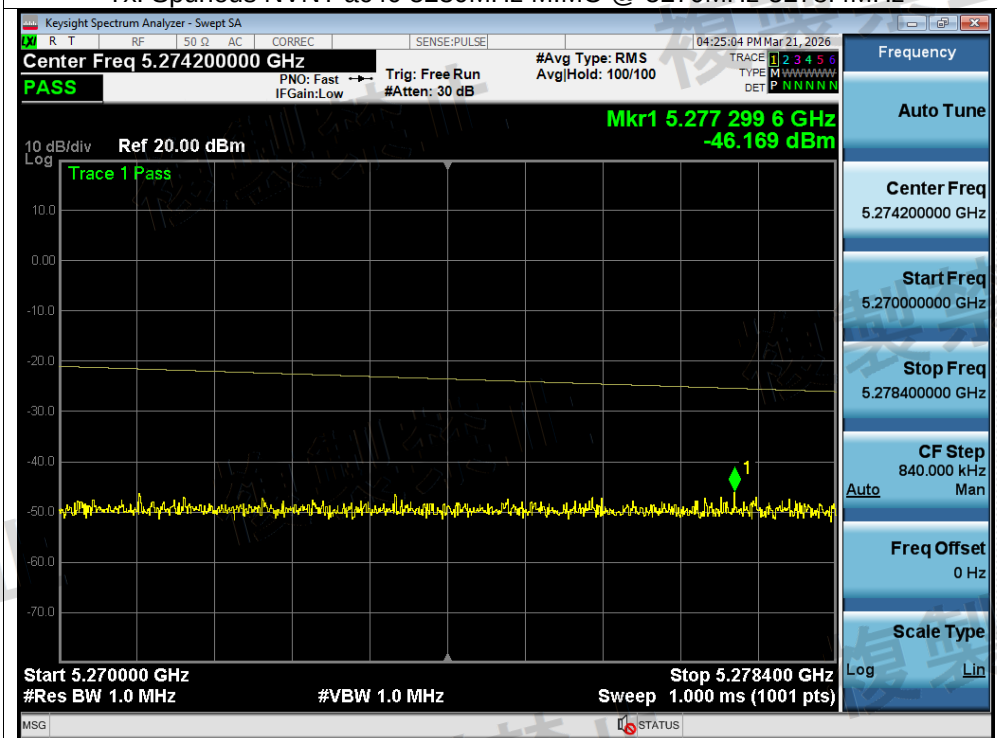

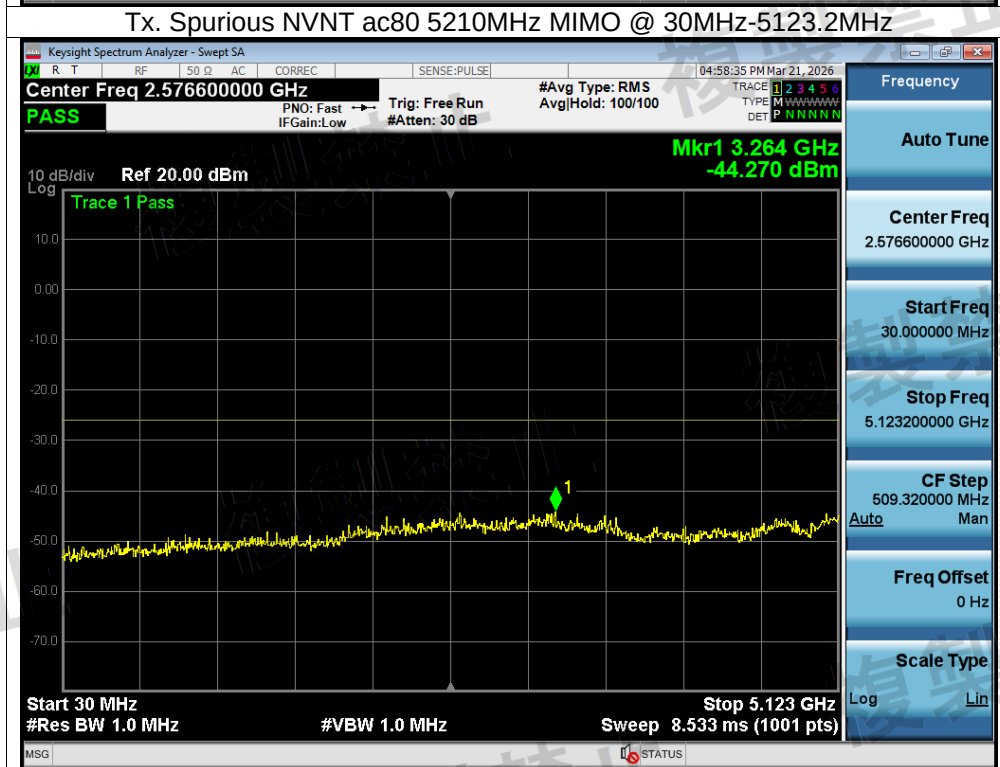


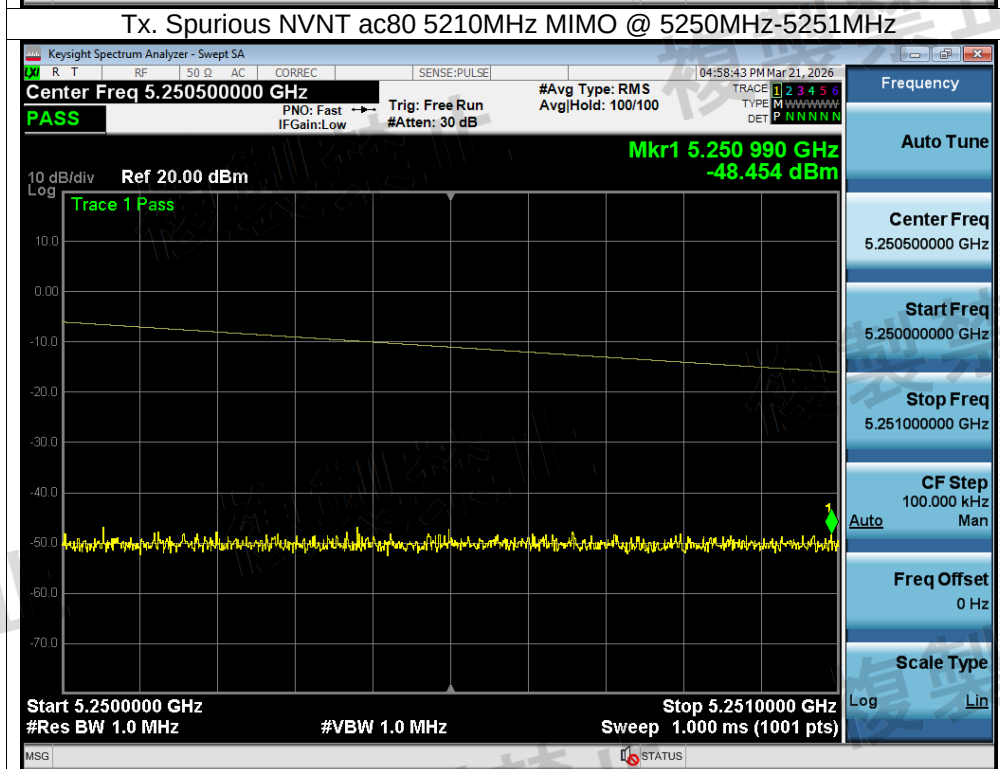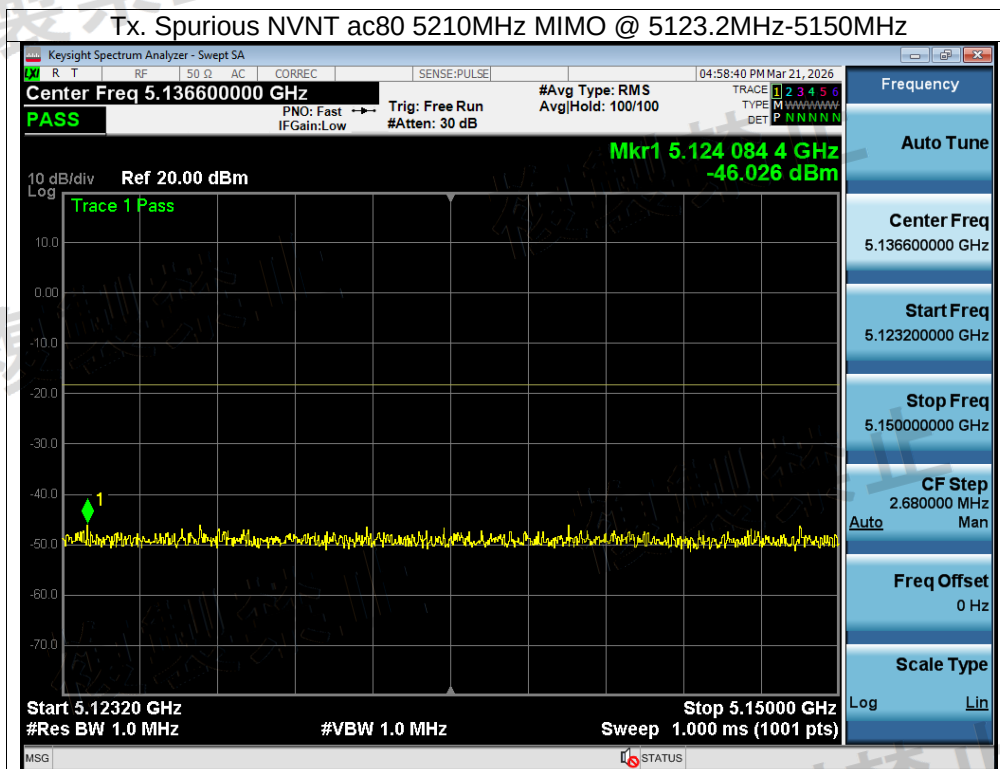

Tx. Spurious NVNT ac80 5210MHz MIMO @ 5251MHz-5290MHz

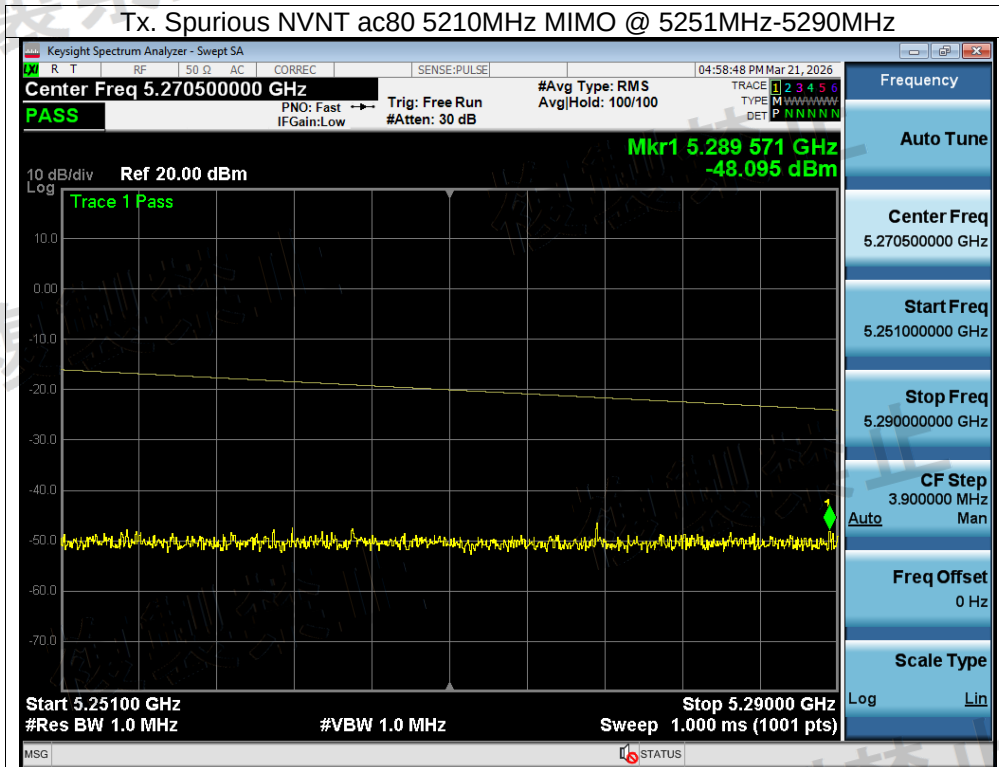


Tx. Spurious NVNT ac80 5210MHz MIMO @ 5290MHz-5296.7MHz

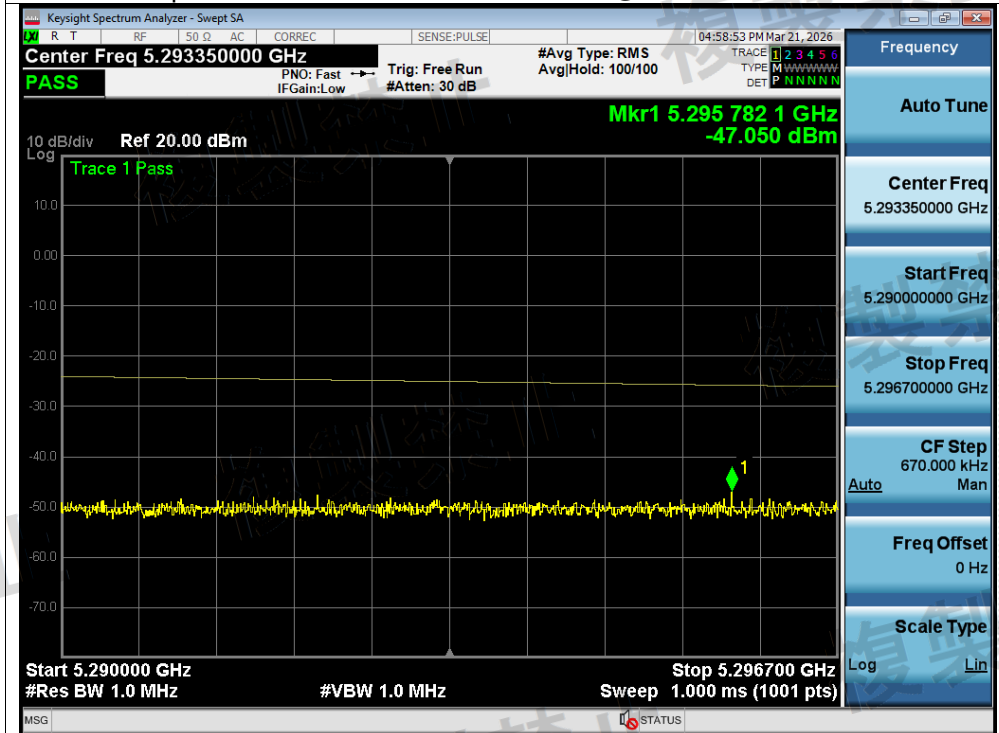





Tx. Spurious NVNT ax20 5180MHz MIMO @ 5142MHz-5150MHz

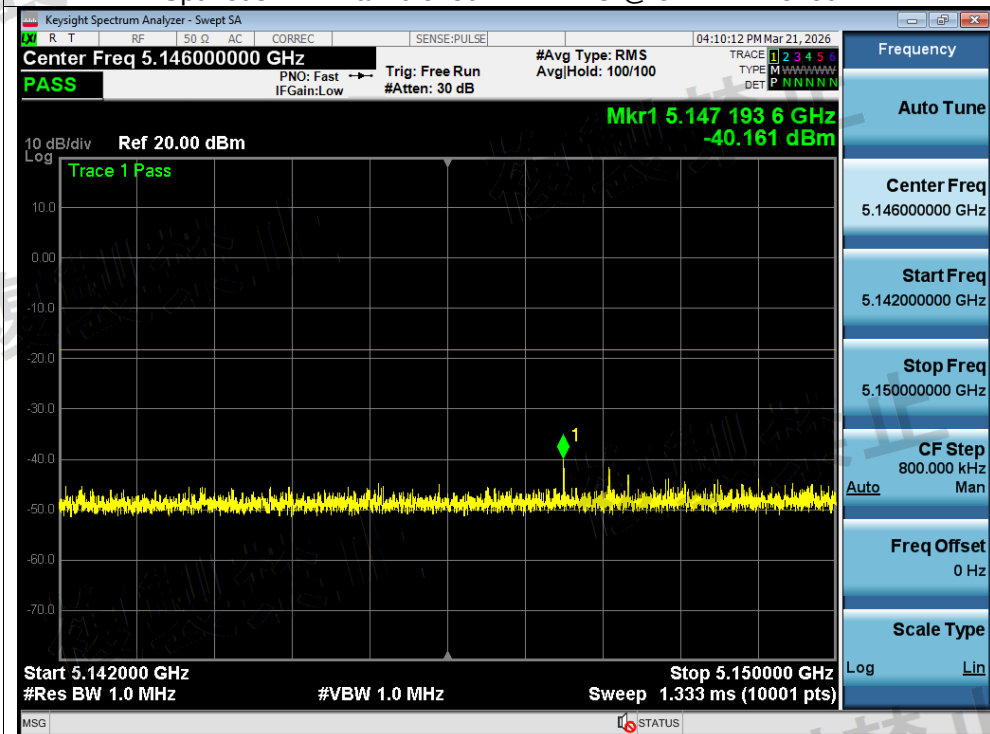


Tx. Spurious NVNT ax20 5180MHz MIMO @ 5250MHz-5251MHz

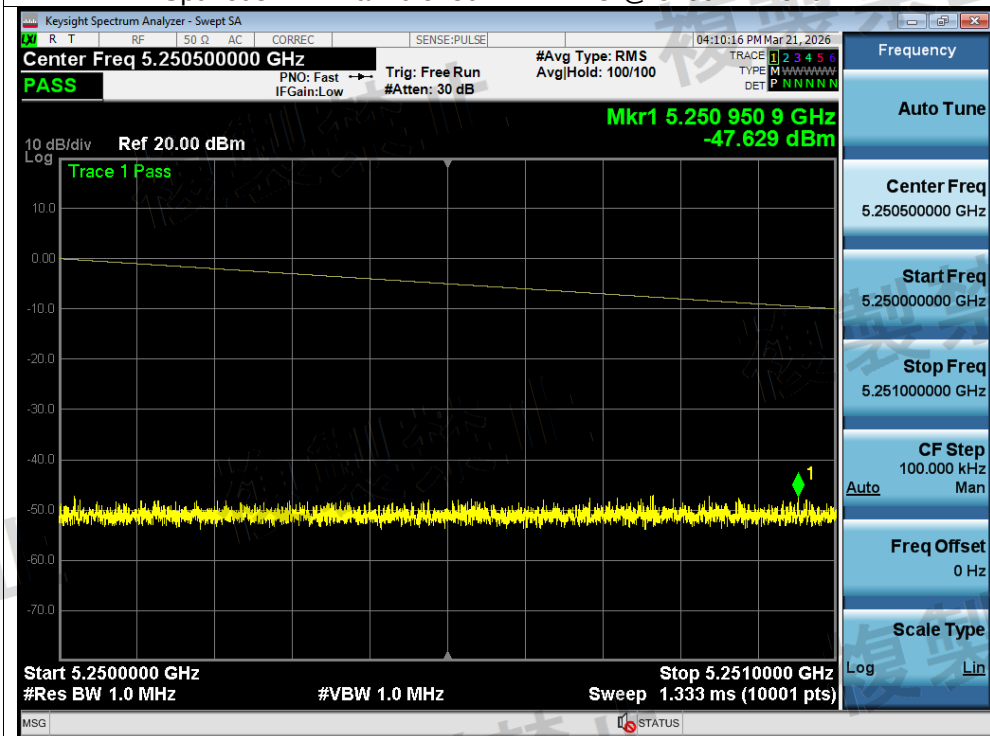


Tx. Spurious NVNT ax20 5180MHz MIMO @ 5251MHz-5260MHz

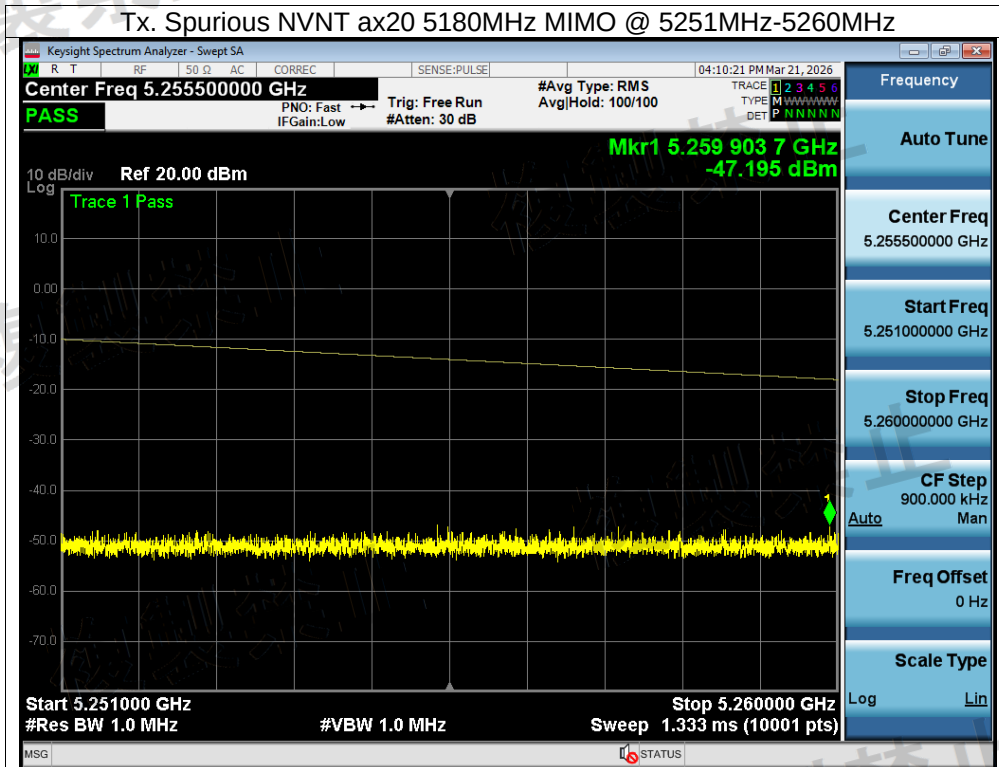


Tx. Spurious NVNT ax20 5180MHz MIMO @ 5260MHz-5266.7MHz

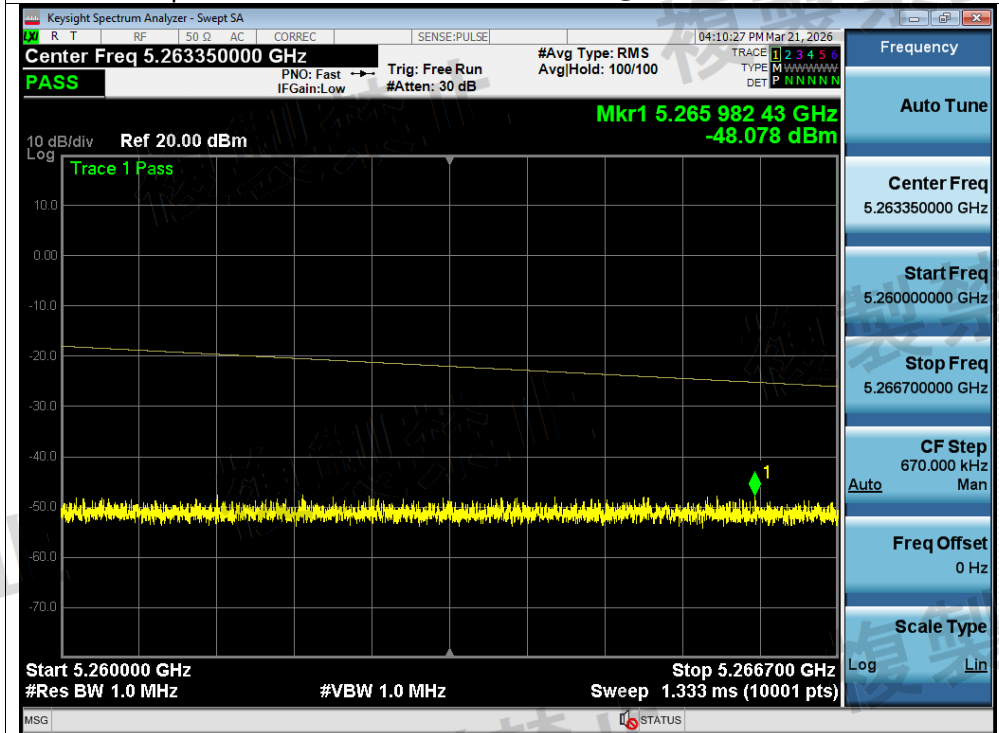


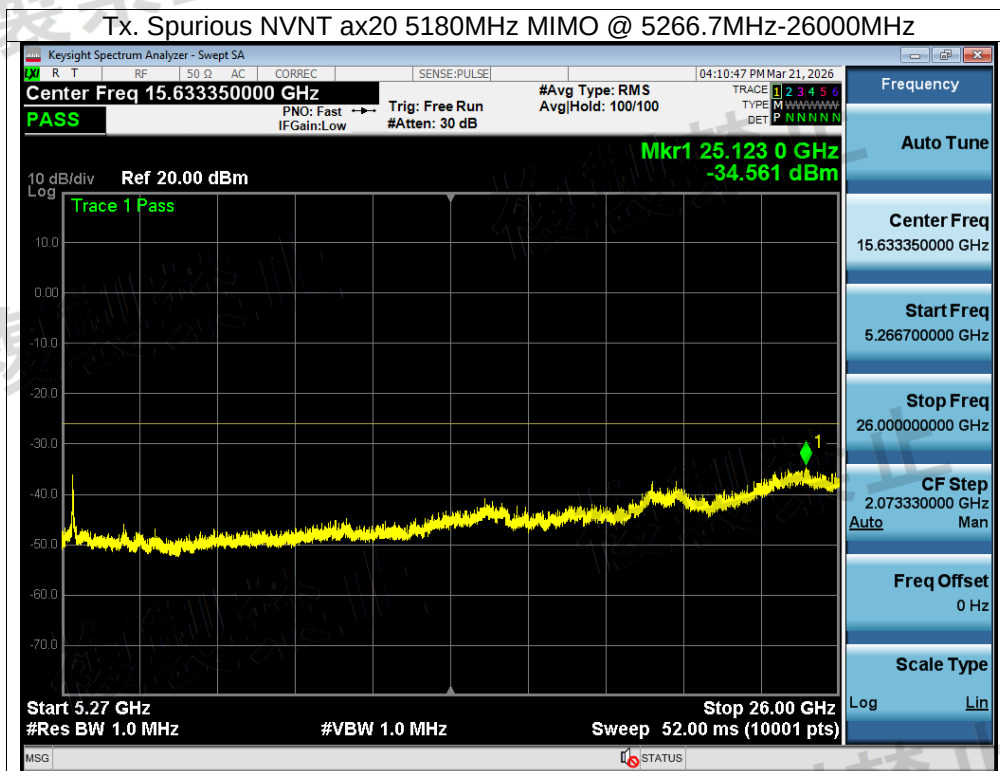


Tx. Spurious NVNT ax20 5200MHz MIMO @ 5142MHz-5150MHz

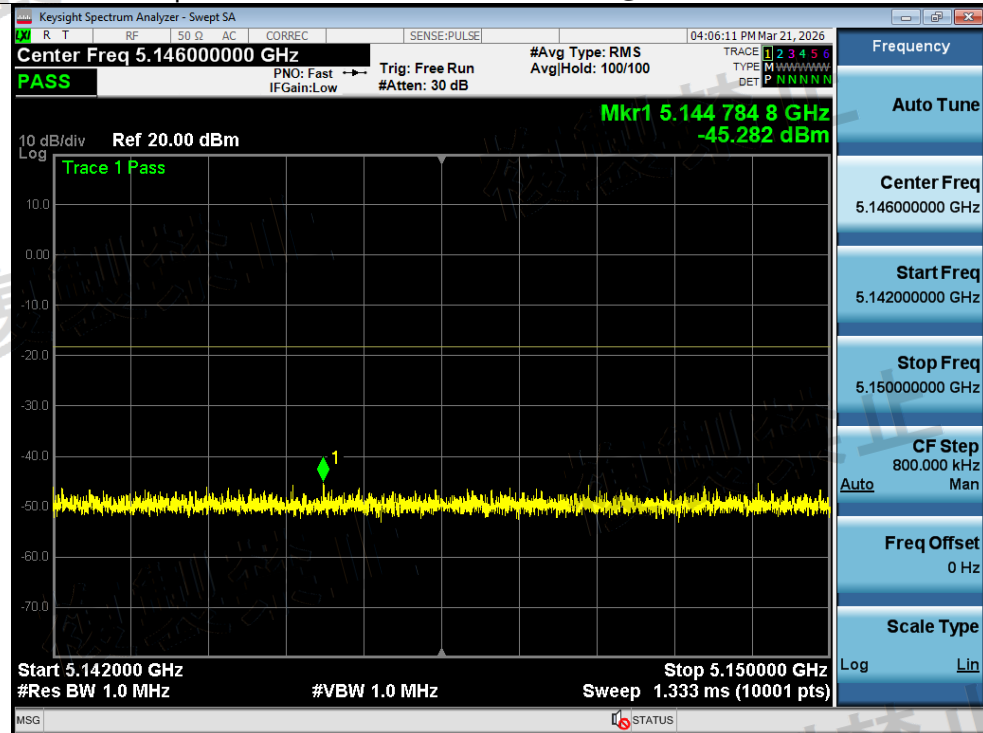


Tx. Spurious NVNT ax20 5200MHz MIMO @ 5250MHz-5251MHz


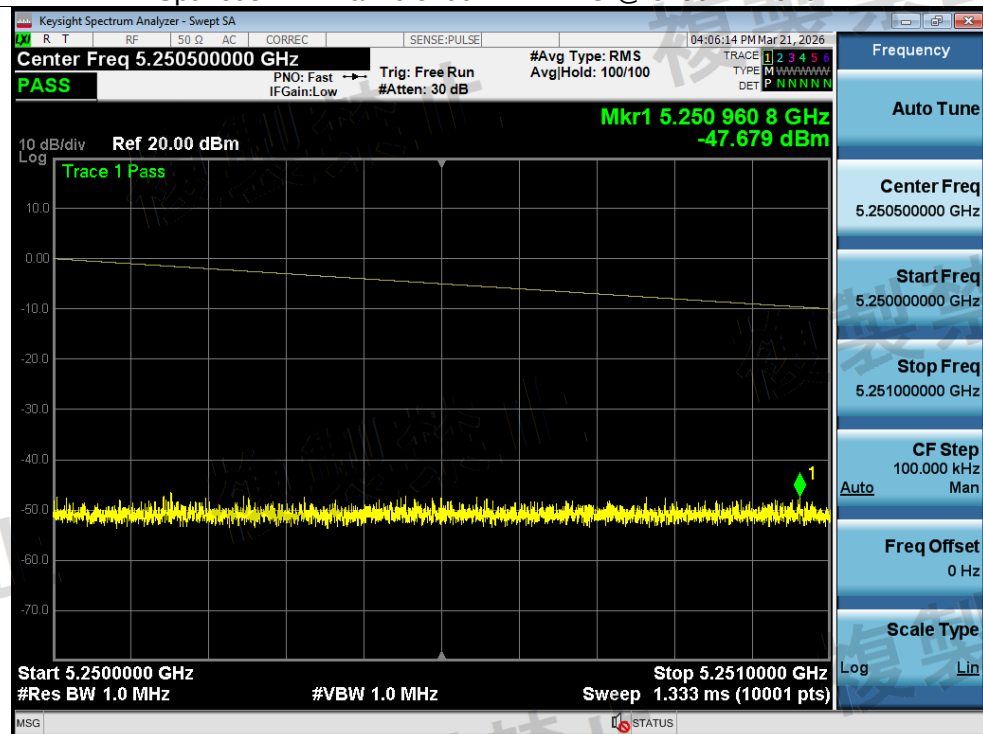


Tx. Spurious NVNT ax20 5200MHz MIMO @ 5251MHz-5260MHz

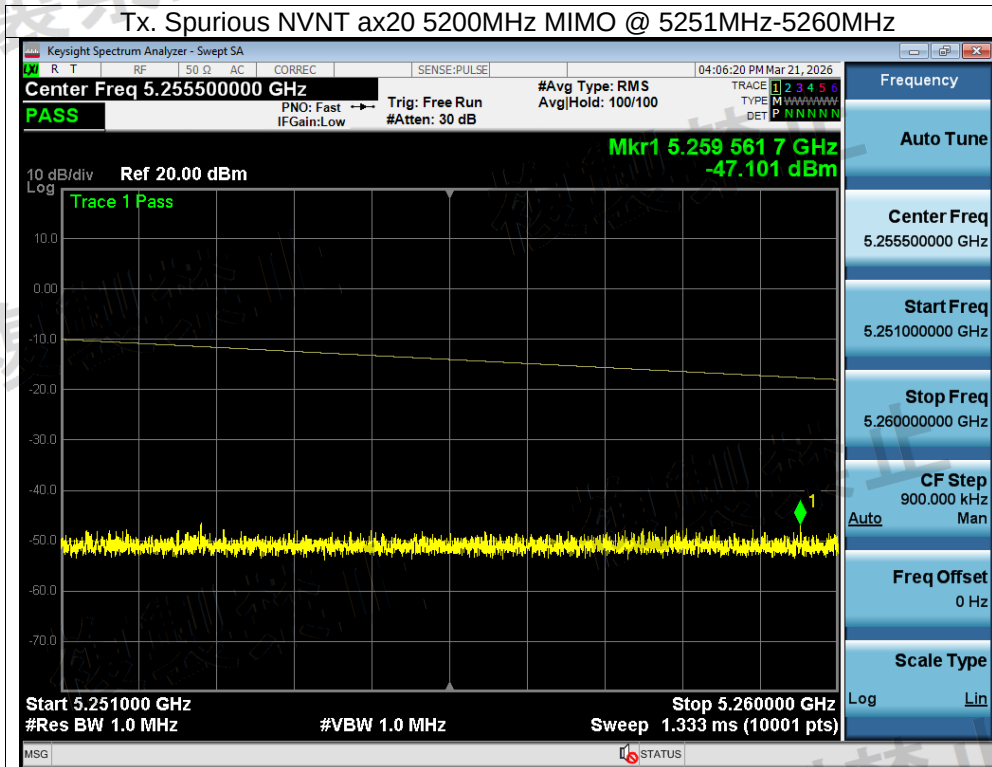


Tx. Spurious NVNT ax20 5200MHz MIMO @ 5260MHz-5266.7MHz

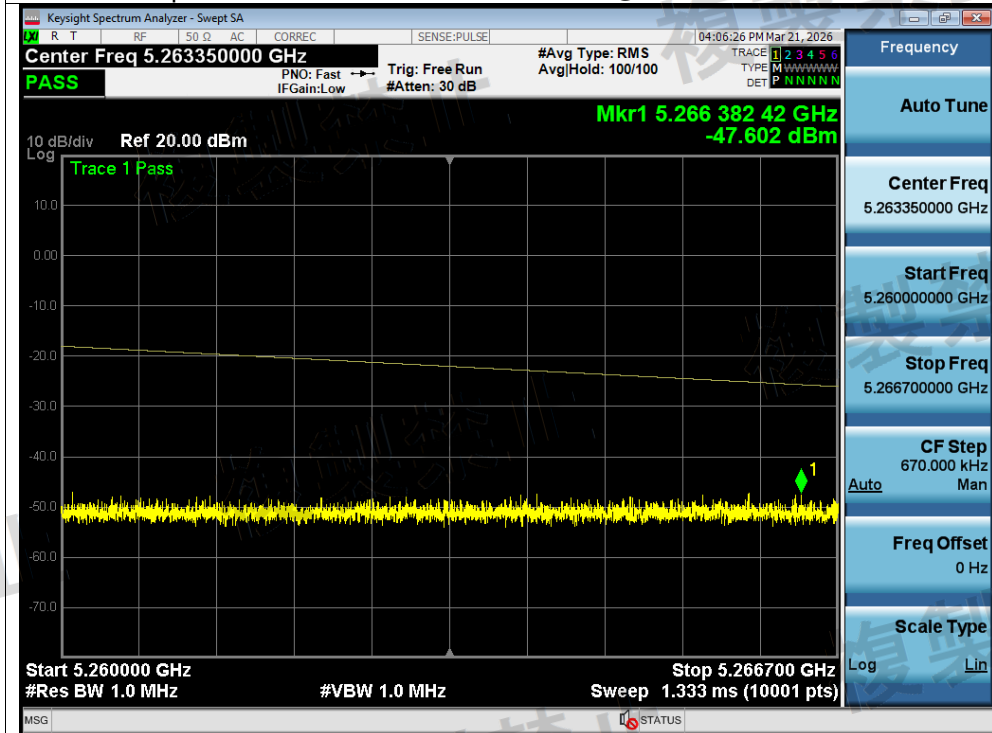


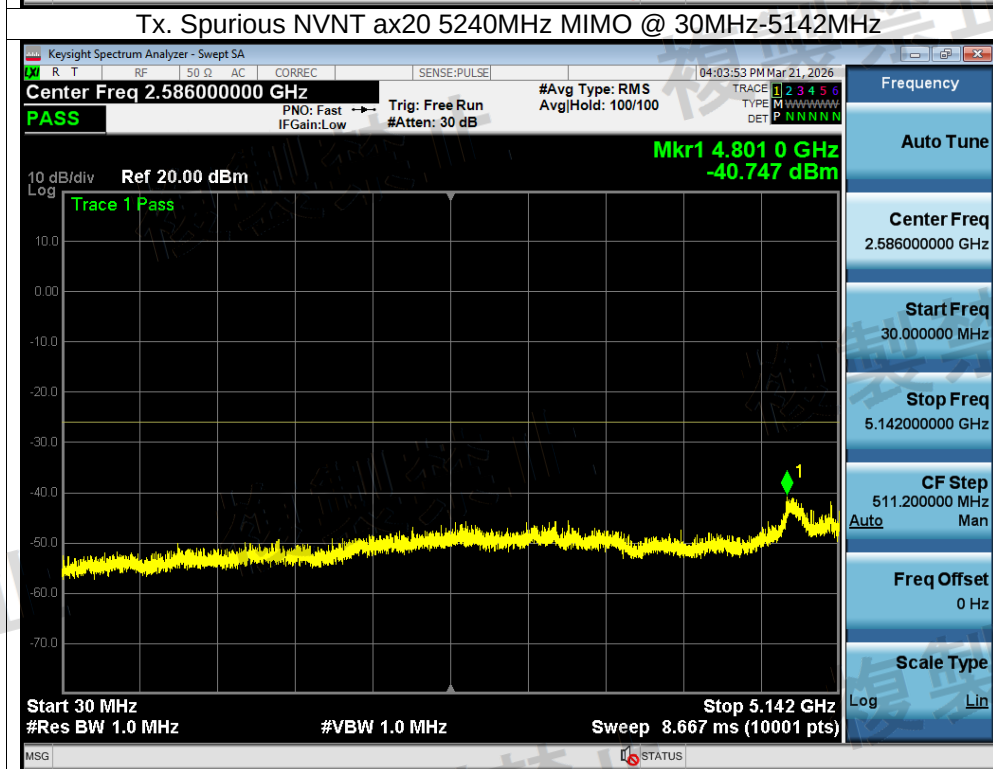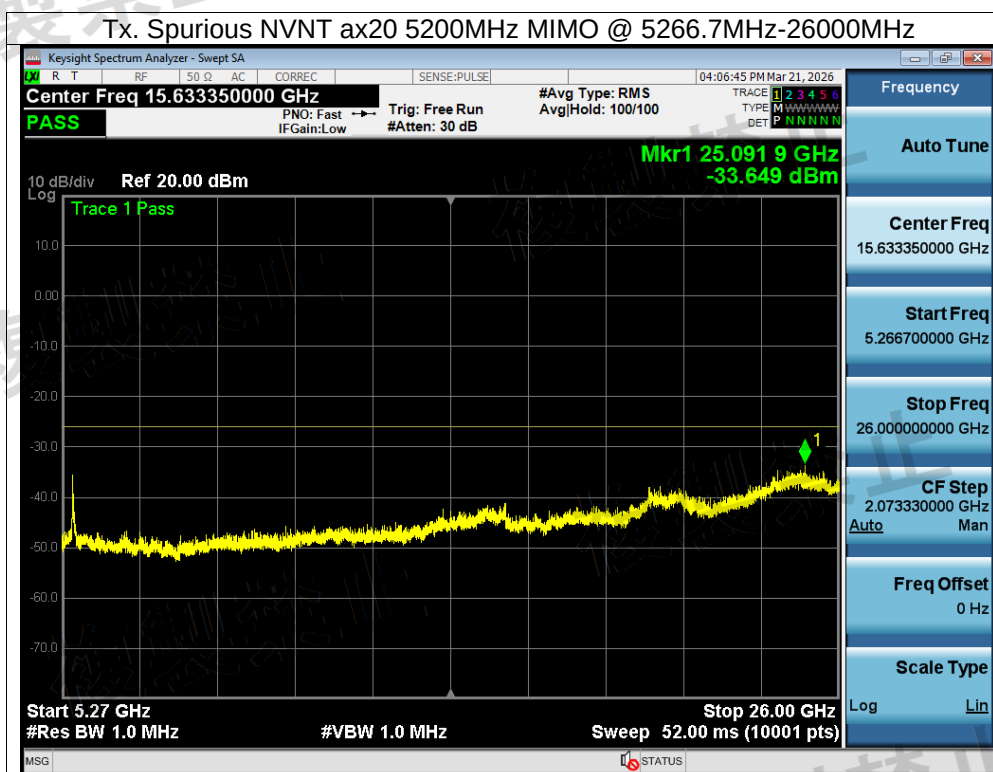


Tx. Spurious NVNT ax20 5240MHz MIMO @ 5142MHz-5150MHz

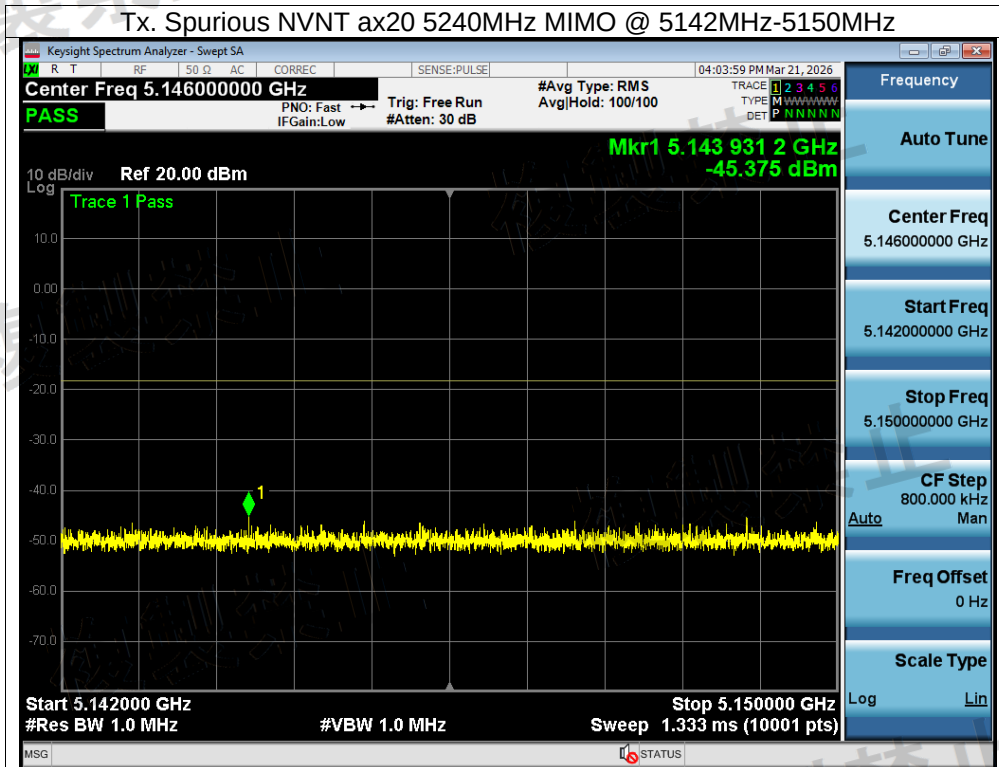


Tx. Spurious NVNT ax20 5240MHz MIMO @ 5250MHz-5251MHz

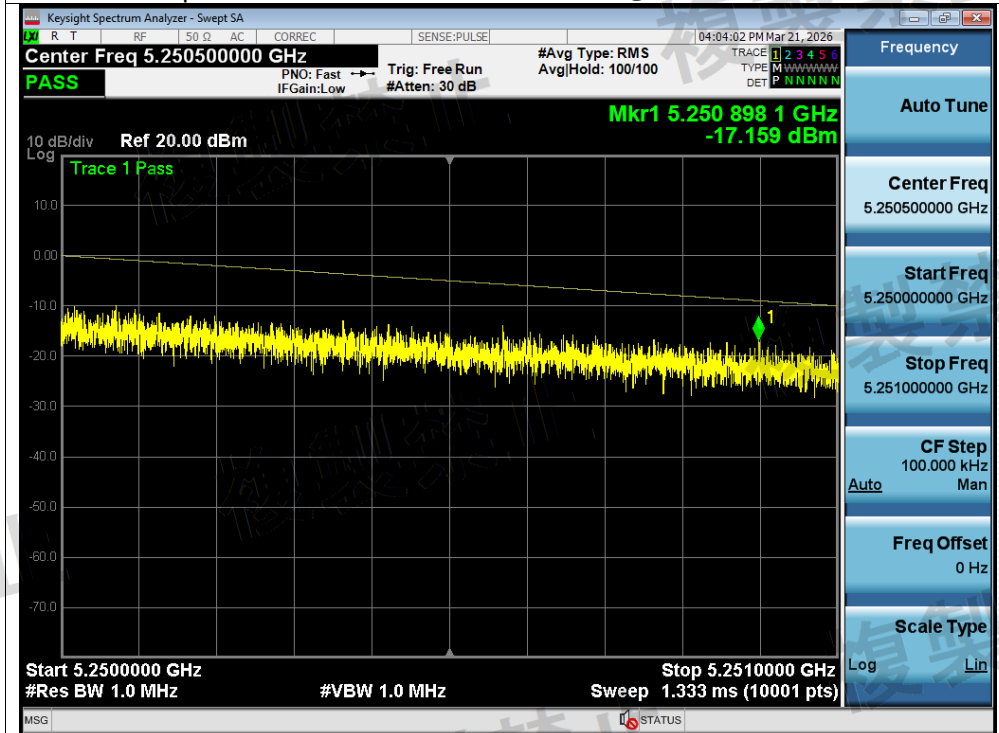


Tx. Spurious NVNT ax20 5240MHz MIMO @ 5251MHz-5260MHz

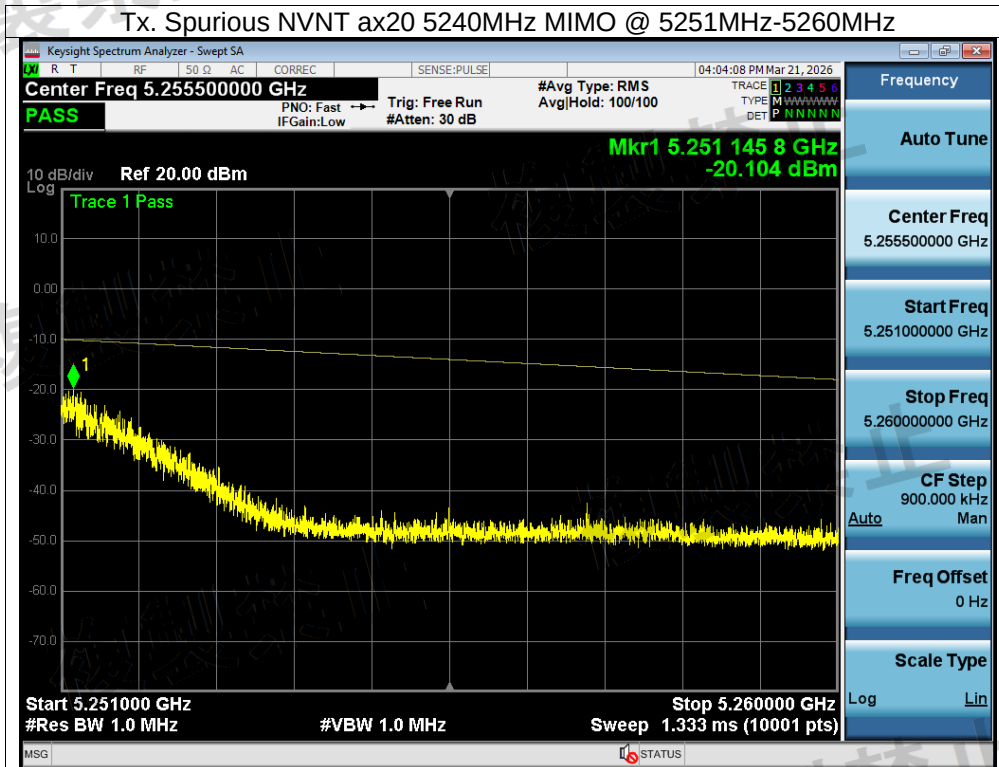


Tx. Spurious NVNT ax20 5240MHz MIMO @ 5260MHz-5266.7MHz


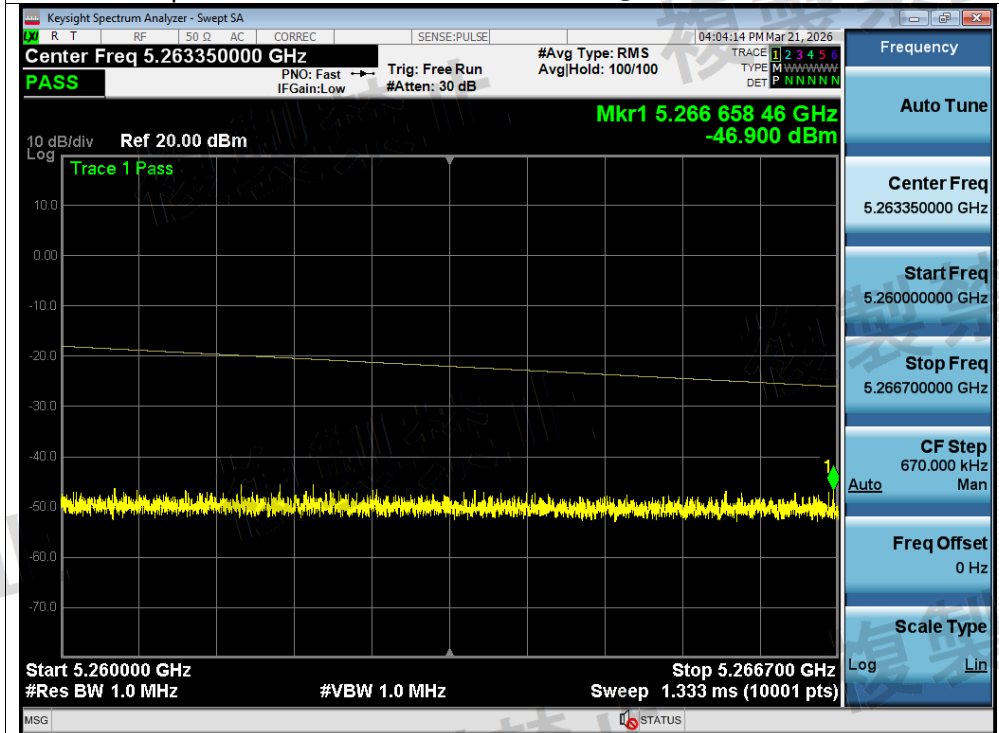


Tx. Spurious NVNT ax20 5240MHz MIMO @ 5266.7MHz-26000MHz

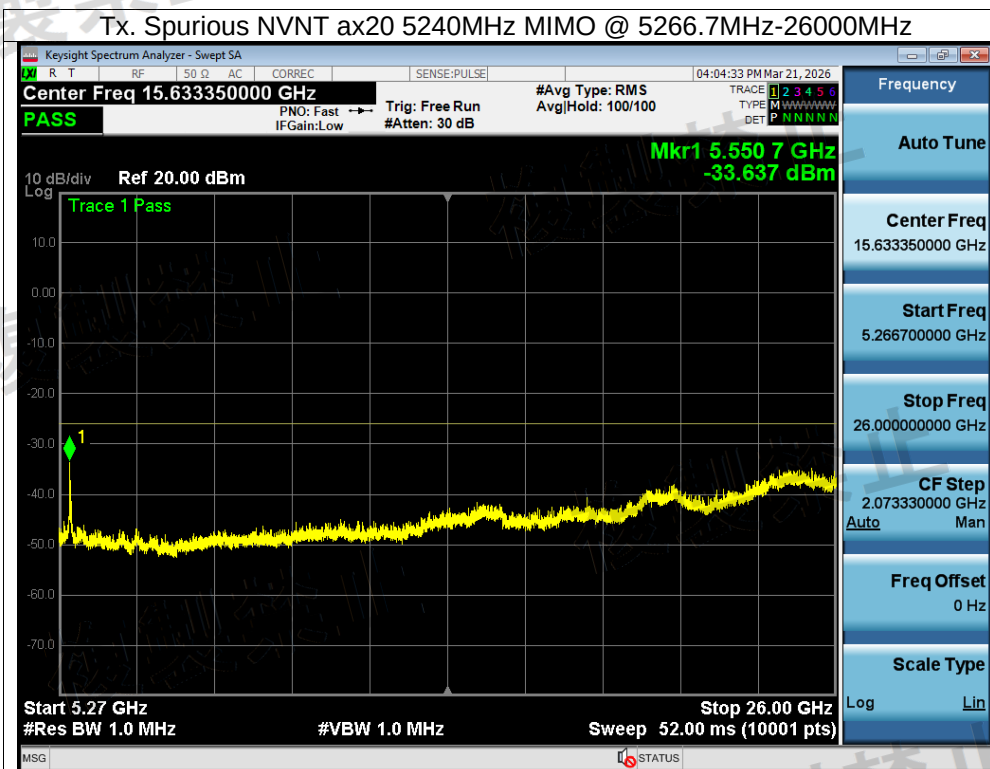


Tx. Spurious NVNT ax40 5190MHz MIMO @ 30MHz-5141.6MHz

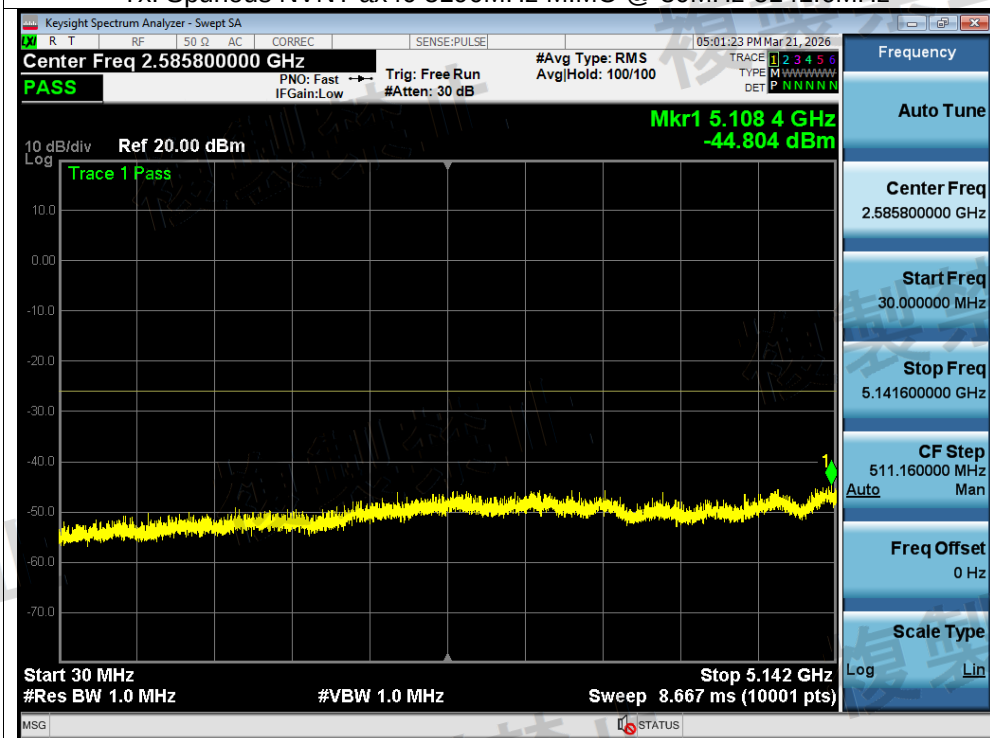


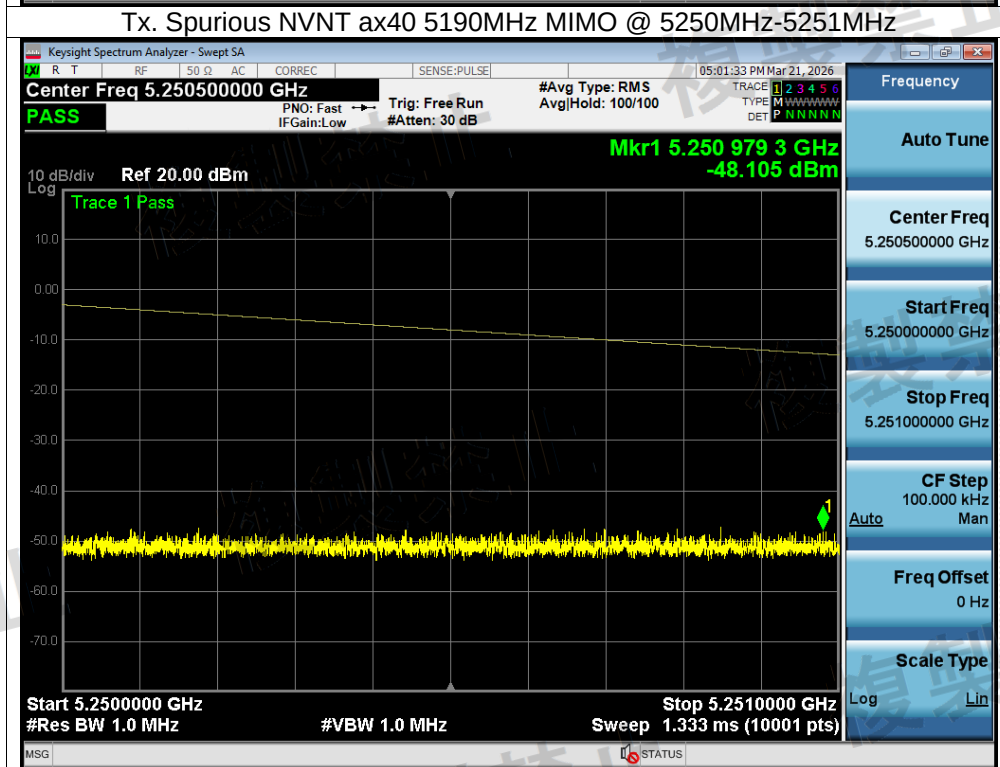
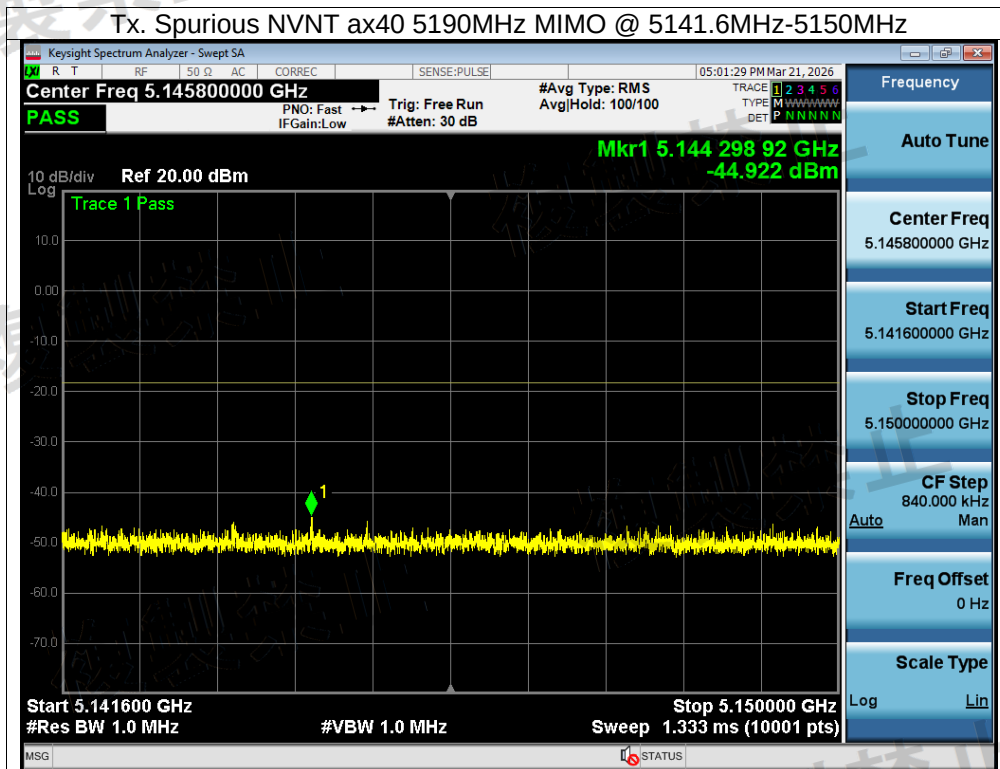


Tx. Spurious NVNT ax40 5190MHz MIMO @ 5251MHz-5270MHz

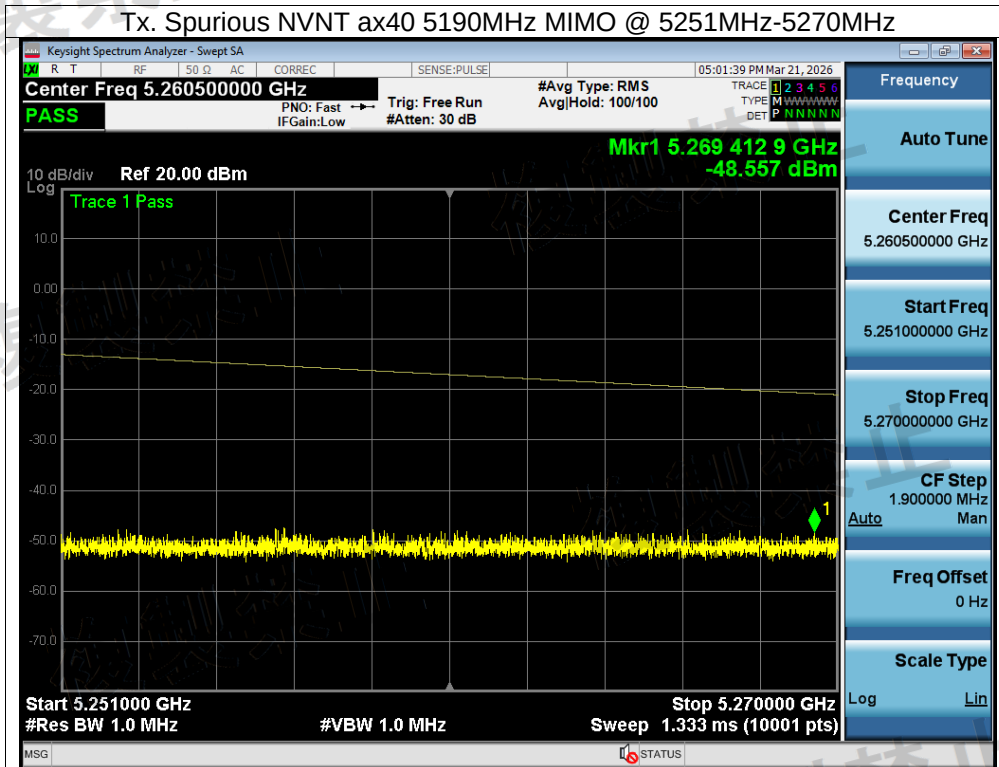


Tx. Spurious NVNT ax40 5190MHz MIMO @ 5270MHz-5278.4MHz

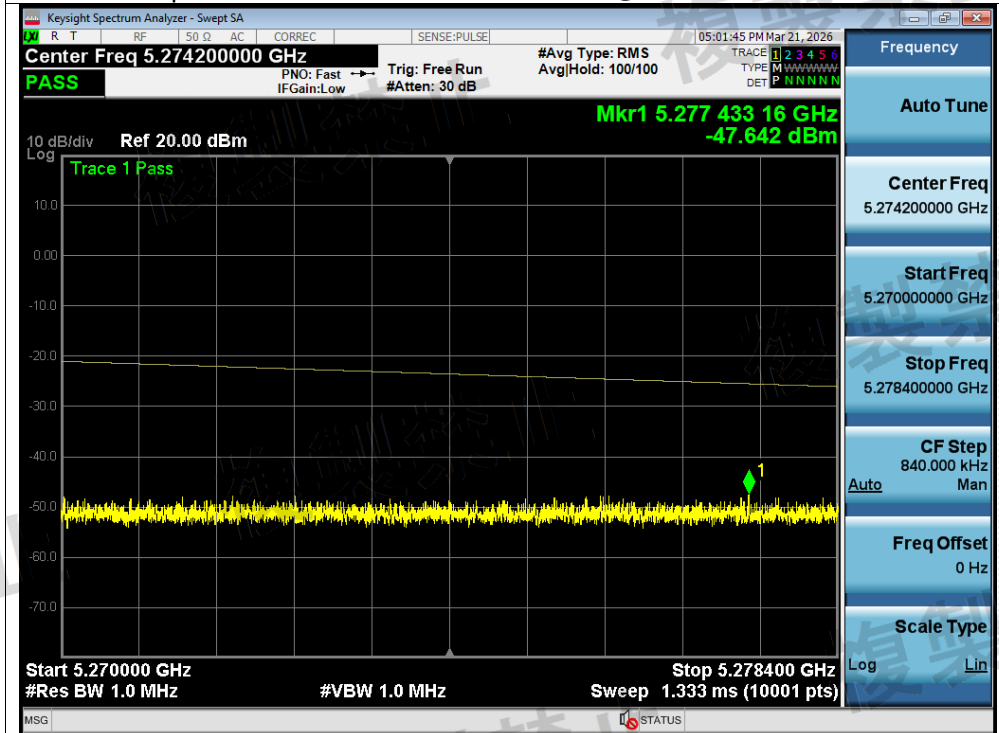


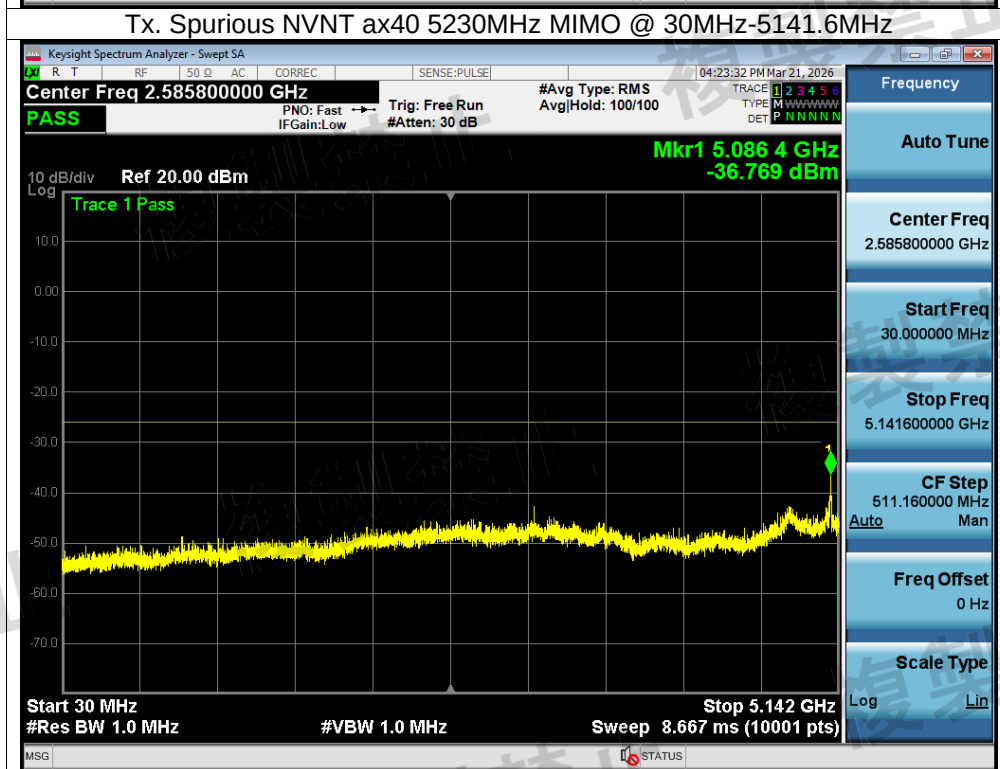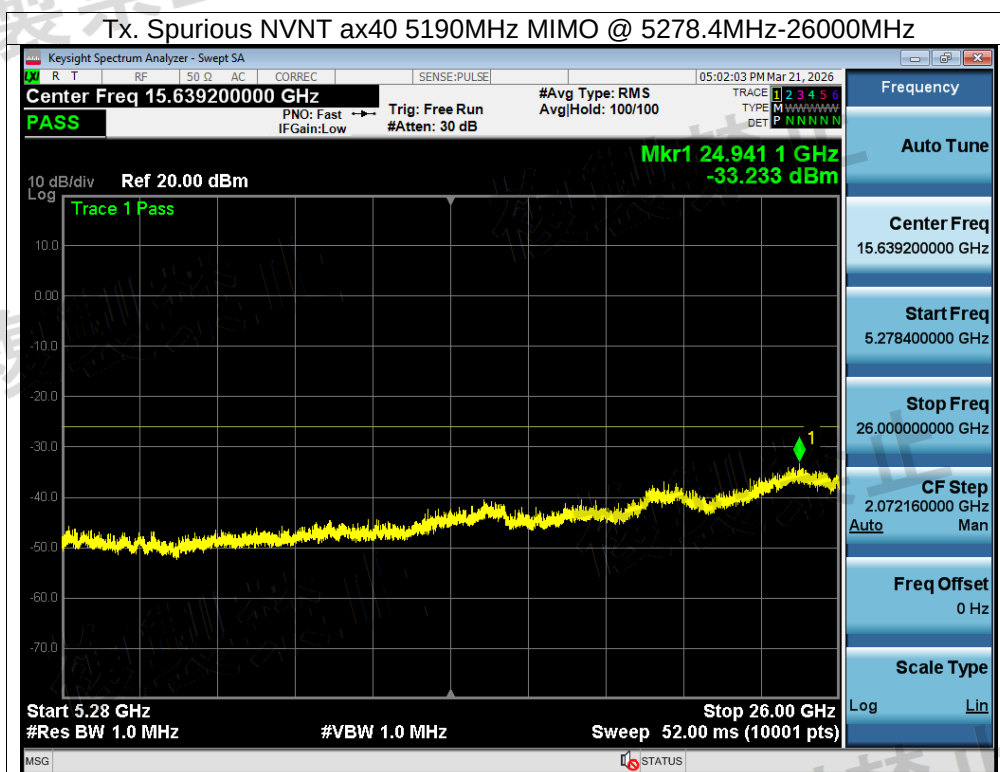


Tx. Spurious NVNT ax40 5230MHz MIMO @ 5141.6MHz-5150MHz

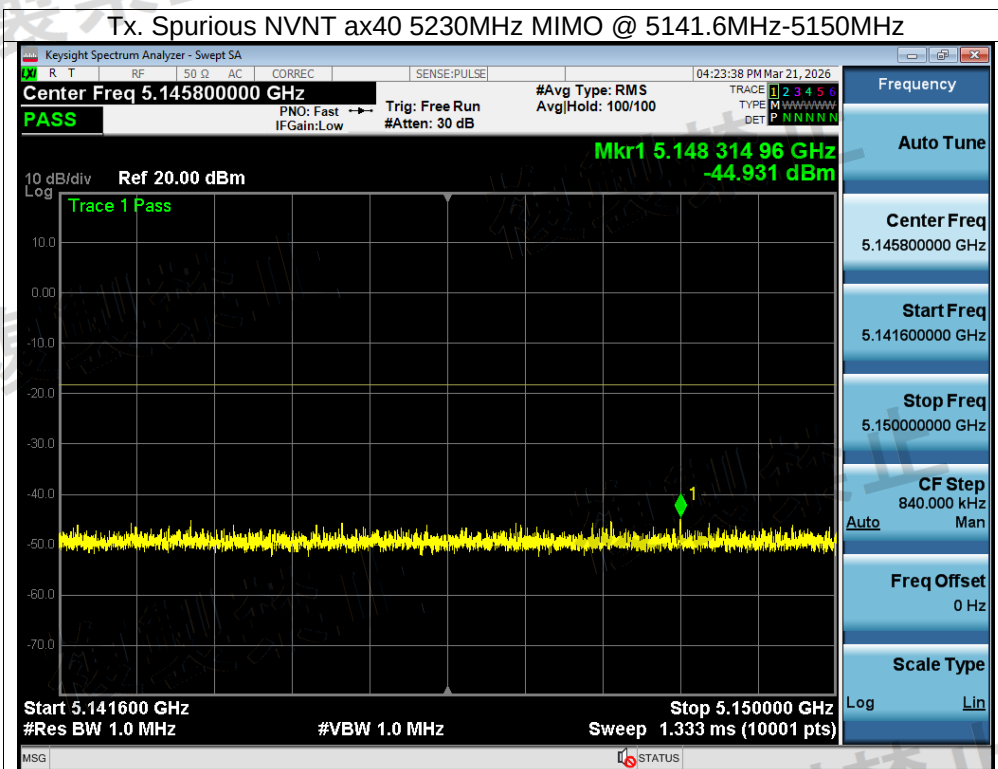


Tx. Spurious NVNT ax40 5230MHz MIMO @ 5250MHz-5251MHz

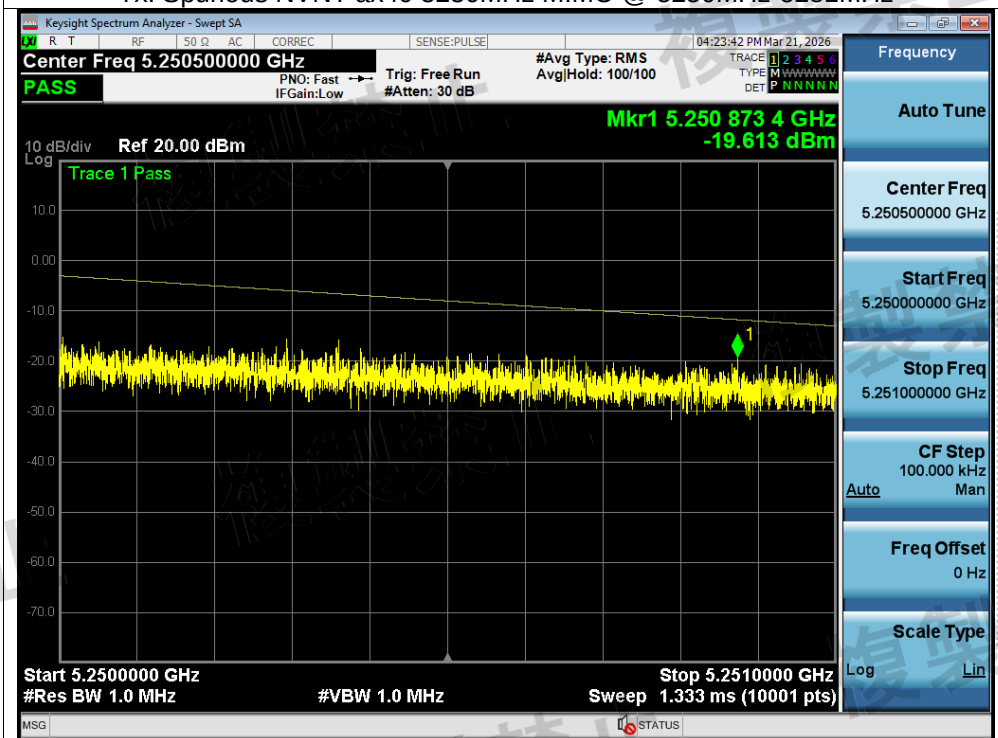


Tx. Spurious NVNT ax40 5230MHz MIMO @ 5251MHz-5270MHz

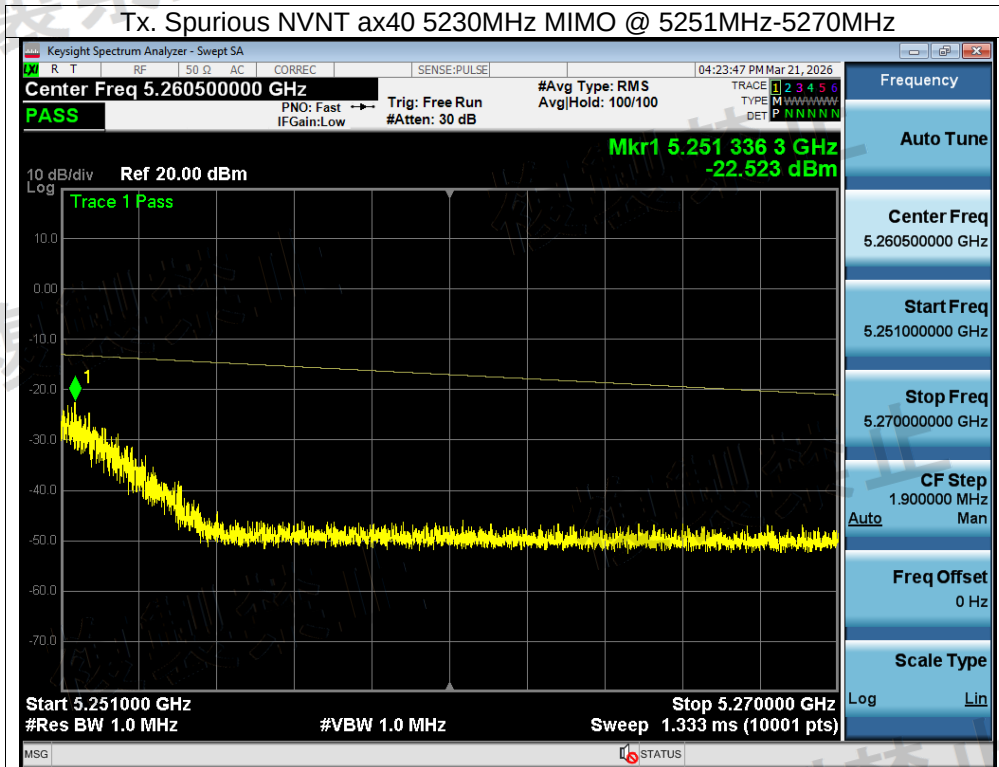


Tx. Spurious NVNT ax40 5230MHz MIMO @ 5270MHz-5278.4MHz

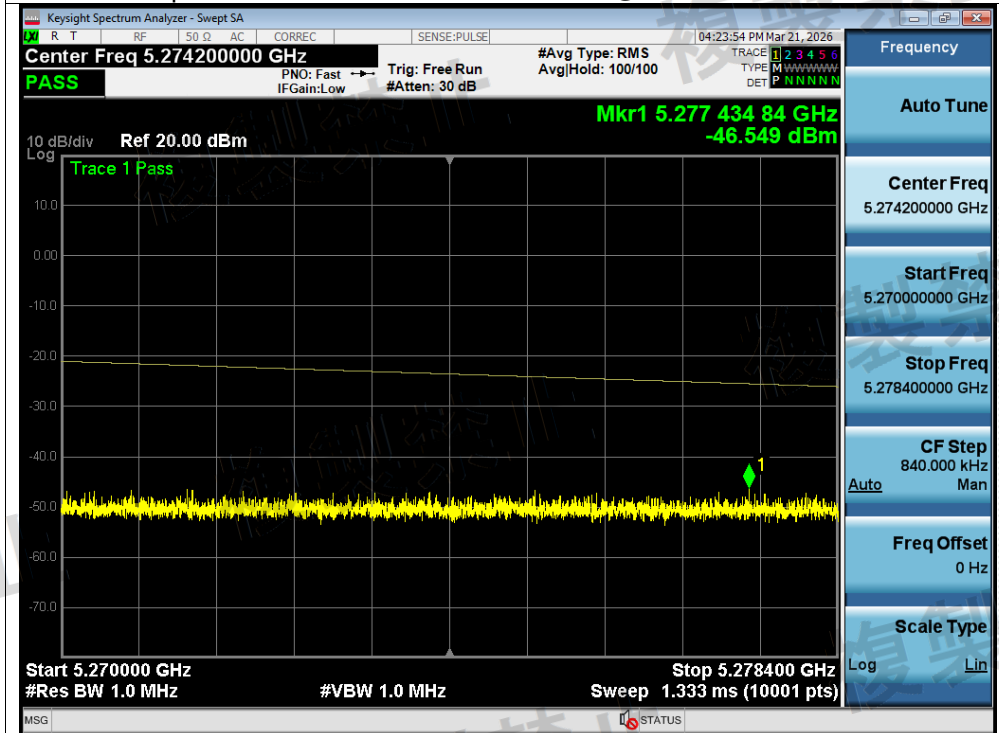


Tx. Spurious NVNT ax40 5230MHz MIMO @ 5278.4MHz-26000MHz

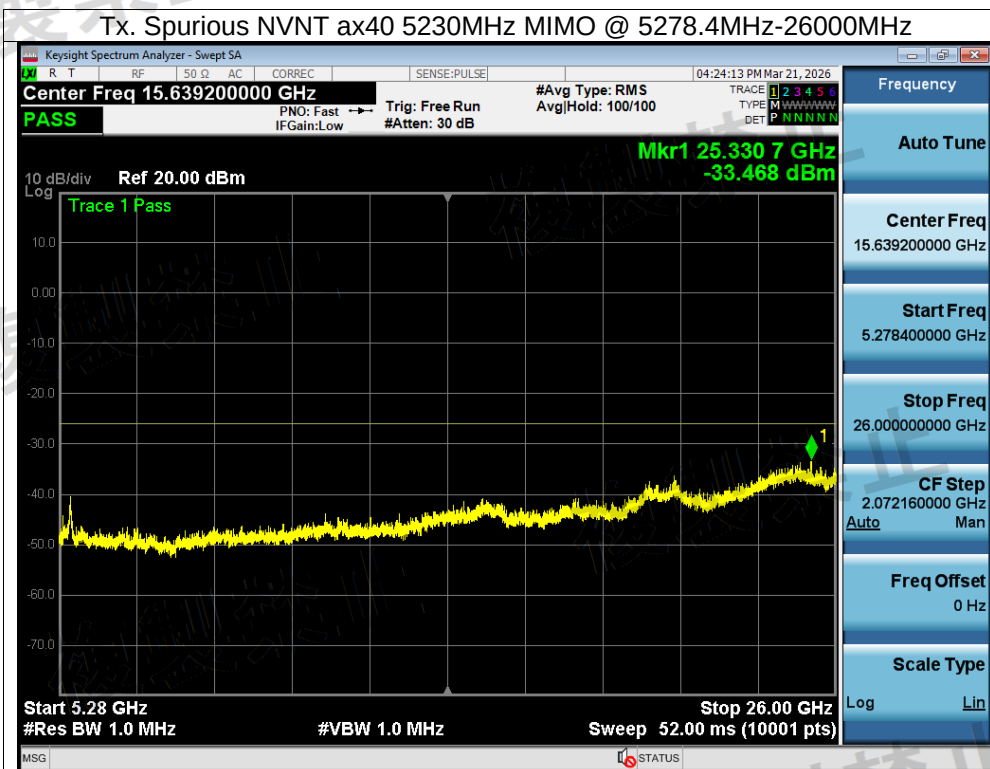


Tx. Spurious NVNT ax80 5210MHz MIMO @ 30MHz-5123.2MHz

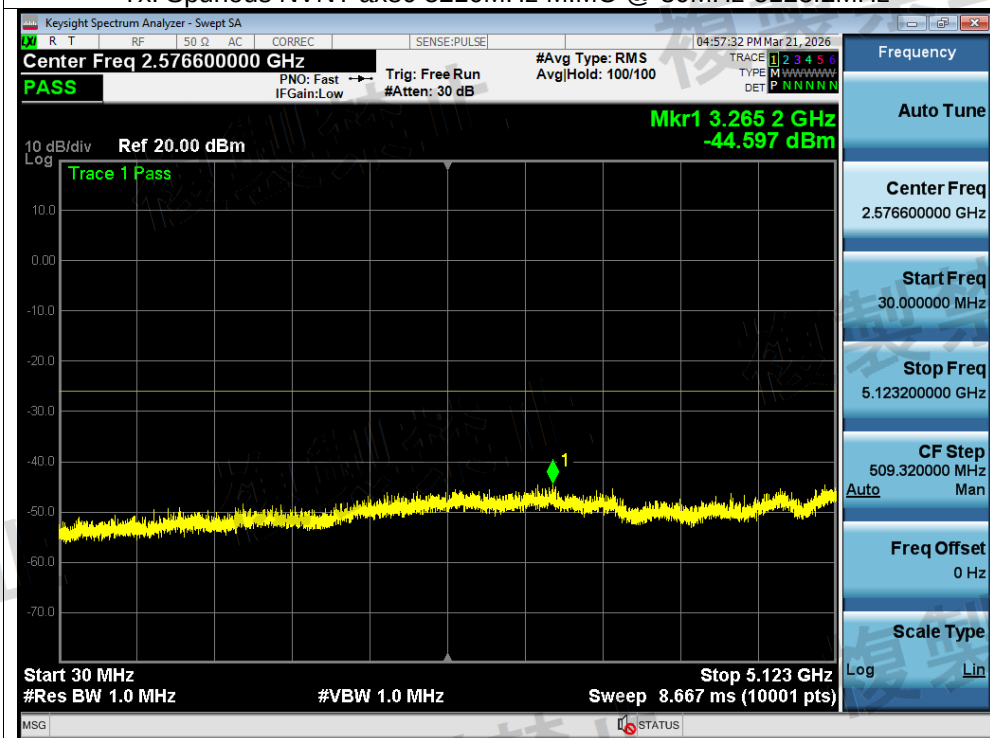


Tx. Spurious NVNT ax80 5210MHz MIMO @ 5123.2MHz-5150MHz

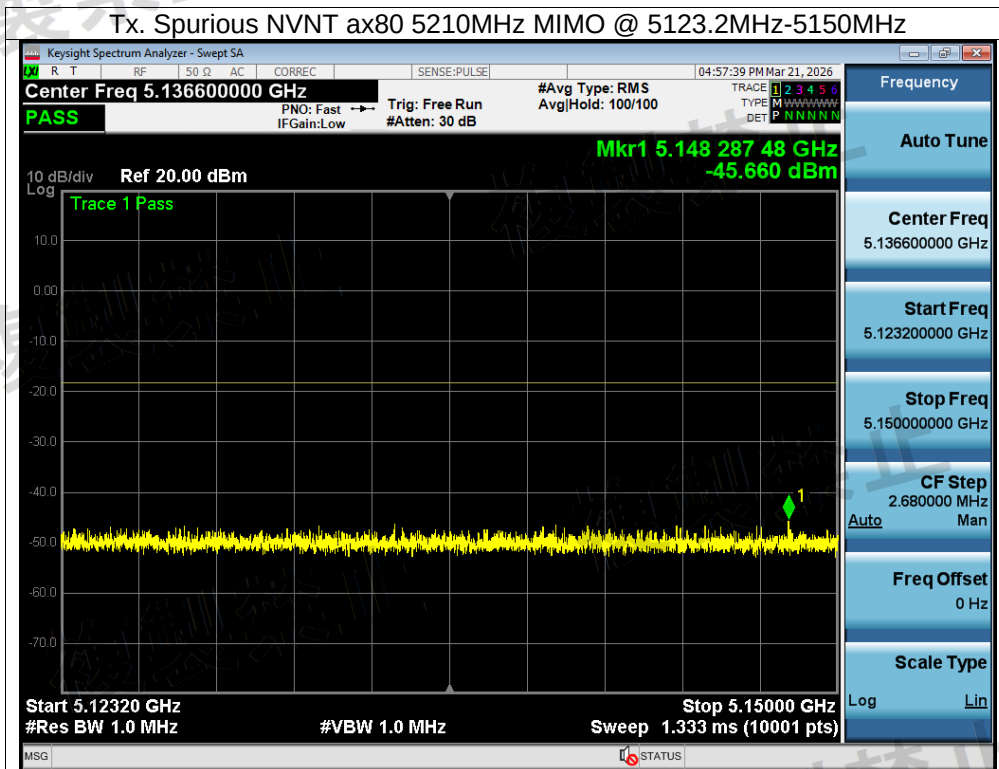


Tx. Spurious NVNT ax80 5210MHz MIMO @ 5250MHz-5251MHz

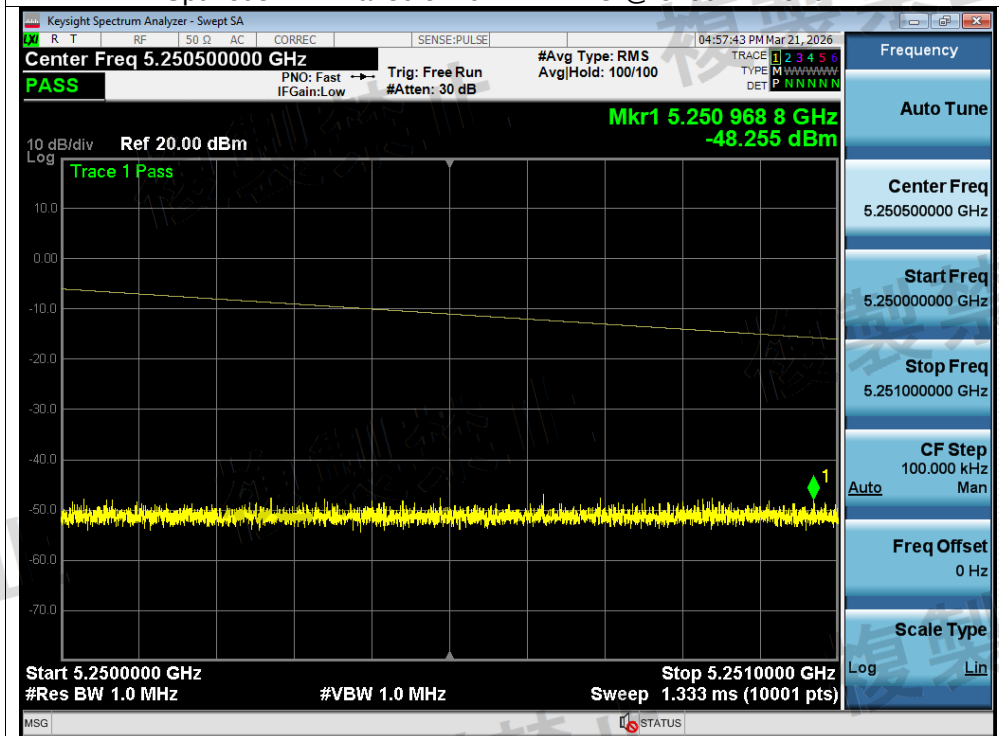


Tx. Spurious NVNT ax80 5210MHz MIMO @ 5251MHz-5290MHz

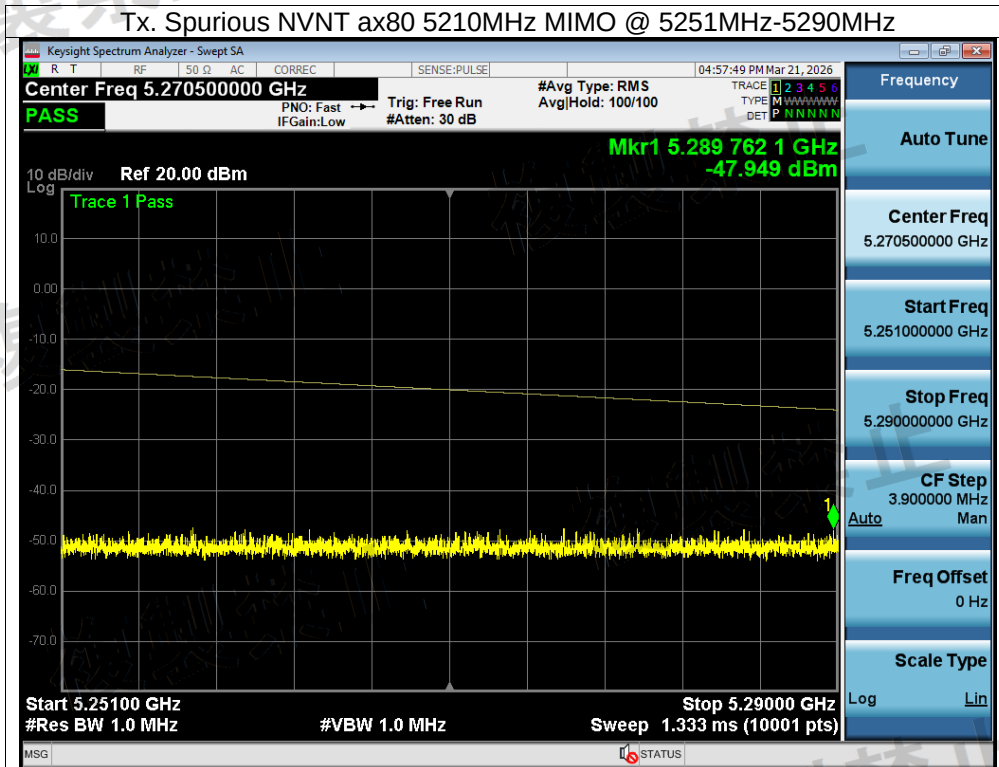


Tx. Spurious NVNT ax80 5210MHz MIMO @ 5290MHz-5296.7MHz

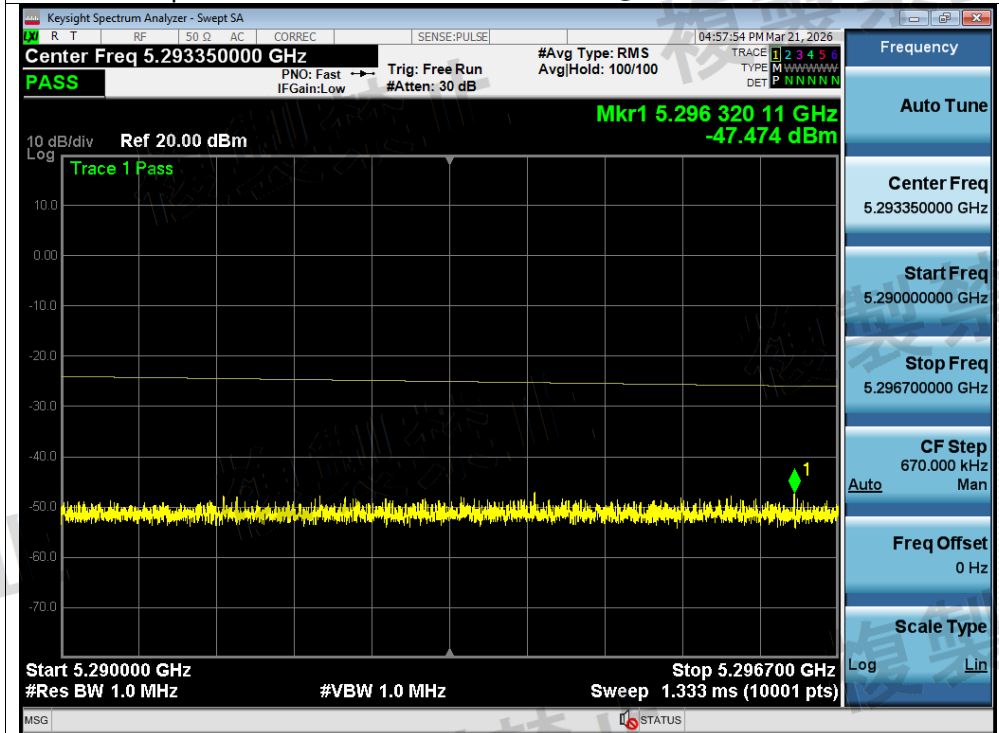

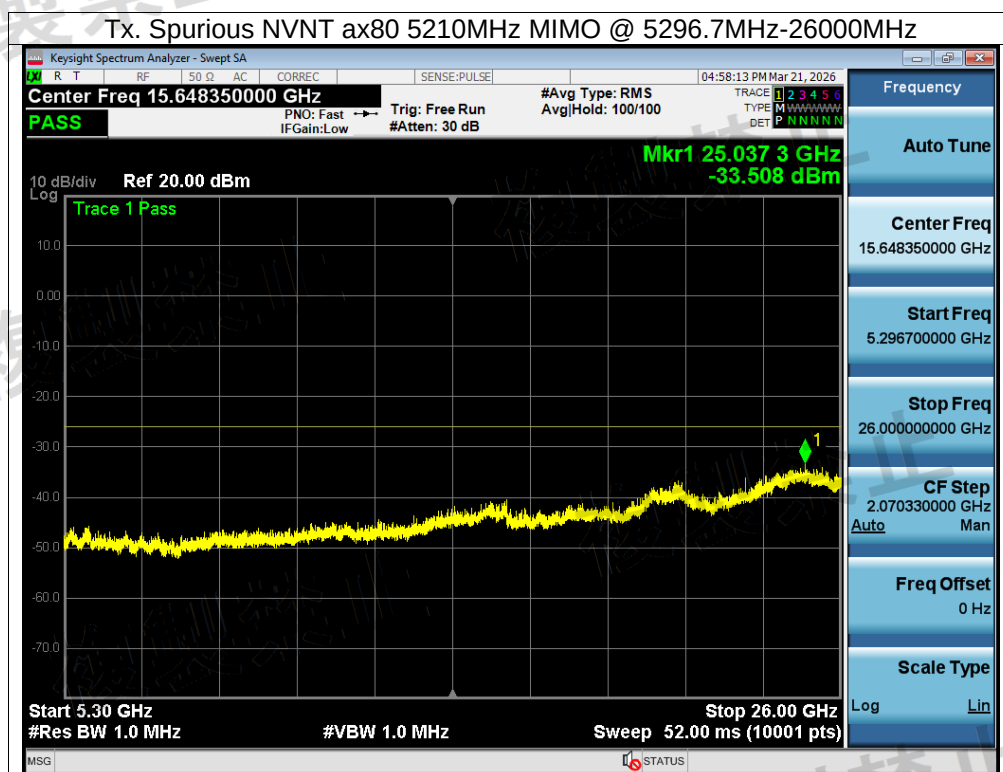

11. Secondary Radiated Emissions Measurement

11.1 Block Diagram Of Test Setup

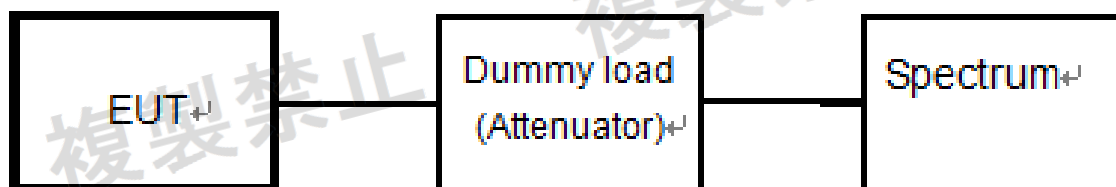

11.2 Limit

Item	Limits
RX Spurious Emission:	$\leq 4\text{nW}$ (-54dBm) ($f < 1\text{GHz}$)
	$\leq 20\text{nW}$ (-47dBm) ($1\text{GHz} \leq f$)

11.3 Measuring Instruments And Setting

Please refer to section 5 in this report. The following table is the setting of Spectrum Analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
RB	100 kHz (below 1GHz emissions) 1 MHz (above 1GHz emissions)
VB	100 kHz (below 1GHz emissions) 1 MHz (above 1GHz emissions)
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

11.4 Test Procedure

- EUT have the continuous reception mode and fixed only one channelize.
- Setting of SA is following as RB / VB: 100 kHz (below 1GHz emissions) / 1 MHz (above 1GHz emissions) / AT: 6dB / Ref: -20dBm / Sweep time: Auto / Sweep Mode: Continuous sweep / Detect mode: Positive peak / Trace mode: Max hold
- SA set RB: 100kHz and VB: 100kHz. Then adjust to start frequency 30MHz and stop frequency 1000MHz. Search to mark peak reading value + cable loss shall be less than 4nW
- SA set RB: 1MHz and VB: 1MHz. Then adjust to start frequency 1000MHz and stop frequency 12500MHz. Search to mark peak reading value + cable loss shall be less than 20nW
- If power level of lower emissions are more than 1/10 of limit (0.4nW for $f < 1\text{GHz}$, 2nW for $f \geq 1\text{GHz}$), all those are to be indicated in the 2nd and 3rd lines. If others are 1/10 or less more of the limit, no necessary to be indicated.

11.5 Test Result

Temperature:	25°C		
Humidity:	55 % RH	Test Voltage	DC 14.4V

Antenna A:

Condition	Mode	Frequency (MHz)	Range (MHz)	Emission Frequency (MHz)	Max Peak Value (dBm)	Max RMS Value (dBm)	Max Peak Value (nW)	Max RMS Value (nW)	Limit (nW)	Verdict
NVNT	a	5180	30-1000	705.12	-80.87	NA	0.0082	NA	4	Pass
NVNT	a	5180	1000-26000	24725.00	-64.61	NA	0.3459	NA	20	Pass
NVNT	a	5200	30-1000	730.34	-88.27	NA	0.0015	NA	4	Pass
NVNT	a	5200	1000-26000	25300.00	-63.66	NA	0.4305	NA	20	Pass
NVNT	a	5240	30-1000	936.95	-88.61	NA	0.0014	NA	4	Pass
NVNT	a	5240	1000-26000	25175.00	-64.75	NA	0.335	NA	20	Pass
NVNT	n20	5180	30-1000	726.46	-84.60	NA	0.0035	NA	4	Pass
NVNT	n20	5180	1000-26000	24675.00	-64.48	NA	0.3565	NA	20	Pass
NVNT	n20	5200	30-1000	814.73	-90.20	NA	0.001	NA	4	Pass
NVNT	n20	5200	1000-26000	25050.00	-64.89	NA	0.3243	NA	20	Pass
NVNT	n20	5240	30-1000	892.33	-89.96	NA	0.001	NA	4	Pass
NVNT	n20	5240	1000-26000	25075.00	-64.51	NA	0.354	NA	20	Pass
NVNT	n40	5190	30-1000	707.06	-78.92	NA	0.0128	NA	4	Pass
NVNT	n40	5190	1000-26000	24600.00	-64.41	NA	0.3622	NA	20	Pass
NVNT	n40	5230	30-1000	906.88	-90.21	NA	0.001	NA	4	Pass
NVNT	n40	5230	1000-26000	25100.00	-64.32	NA	0.3698	NA	20	Pass
NVNT	ac20	5180	30-1000	704.15	-88.59	NA	0.0014	NA	4	Pass
NVNT	ac20	5180	1000-26000	24950.00	-63.97	NA	0.4009	NA	20	Pass
NVNT	ac20	5200	30-1000	705.12	-86.89	NA	0.002	NA	4	Pass
NVNT	ac20	5200	1000-26000	24775.00	-64.86	NA	0.3266	NA	20	Pass
NVNT	ac20	5240	30-1000	705.12	-77.69	NA	0.017	NA	4	Pass
NVNT	ac20	5240	1000-26000	24950.00	-65.00	NA	0.3162	NA	20	Pass
NVNT	ac40	5190	30-1000	903.00	-89.48	NA	0.0011	NA	4	Pass
NVNT	ac40	5190	1000-26000	24900.00	-64.21	NA	0.3793	NA	20	Pass
NVNT	ac40	5230	30-1000	704.15	-80.62	NA	0.0087	NA	4	Pass
NVNT	ac40	5230	1000-26000	24675.00	-64.58	NA	0.3483	NA	20	Pass
NVNT	ac80	5210	30-1000	731.31	-87.88	NA	0.0016	NA	4	Pass
NVNT	ac80	5210	1000-26000	25100.00	-64.39	NA	0.3639	NA	20	Pass
NVNT	ax20	5180	30-1000	731.02	-86.97	NA	0.002	NA	4	Pass
NVNT	ax20	5180	1000-26000	24710.00	-64.44	NA	0.3597	NA	20	Pass
NVNT	ax20	5200	30-1000	936.27	-90.07	NA	0.001	NA	4	Pass
NVNT	ax20	5200	1000-26000	24272.50	-64.47	NA	0.3573	NA	20	Pass
NVNT	ax20	5240	30-1000	725.98	-89.60	NA	0.0011	NA	4	Pass
NVNT	ax20	5240	1000-26000	24765.00	-64.71	NA	0.3381	NA	20	Pass
NVNT	ax40	5190	30-1000	713.17	-80.83	NA	0.0083	NA	4	Pass
NVNT	ax40	5190	1000-26000	24895.00	-64.86	NA	0.3266	NA	20	Pass
NVNT	ax40	5230	30-1000	707.16	-84.35	NA	0.0037	NA	4	Pass
NVNT	ax40	5230	1000-26000	25085.00	-64.69	NA	0.3396	NA	20	Pass
NVNT	ax80	5210	30-1000	730.15	-82.98	NA	0.005	NA	4	Pass
NVNT	ax80	5210	1000-26000	24972.50	-63.69	NA	0.4276	NA	20	Pass

Antenna B:


Condition	Mode	Frequency (MHz)	Range (MHz)	Emission Frequency (MHz)	Max Peak Value (dBm)	Max RMS Value (dBm)	Max Peak Value (nW)	Max RMS Value (nW)	Limit (nW)	Verdict
NVNT	a	5180	30-1000	935.01	-89.09	NA	0.0012	NA	4	Pass
NVNT	a	5180	1000-26000	5250.00	-63.25	NA	0.4732	NA	20	Pass
NVNT	a	5200	30-1000	903.00	-89.44	NA	0.0011	NA	4	Pass
NVNT	a	5200	1000-26000	5250.00	-63.43	NA	0.4539	NA	20	Pass
NVNT	a	5240	30-1000	870.99	-89.32	NA	0.0012	NA	4	Pass
NVNT	a	5240	1000-26000	5250.00	-63.55	NA	0.4416	NA	20	Pass
NVNT	n20	5180	30-1000	932.10	-90.20	NA	0.001	NA	4	Pass
NVNT	n20	5180	1000-26000	5250.00	-63.38	NA	0.4592	NA	20	Pass
NVNT	n20	5200	30-1000	466.50	-90.40	NA	0.0009	NA	4	Pass
NVNT	n20	5200	1000-26000	5250.00	-63.72	NA	0.4246	NA	20	Pass
NVNT	n20	5240	30-1000	824.43	-89.97	NA	0.001	NA	4	Pass
NVNT	n20	5240	1000-26000	5250.00	-63.68	NA	0.4285	NA	20	Pass
NVNT	n40	5190	30-1000	869.05	-89.50	NA	0.0011	NA	4	Pass
NVNT	n40	5190	1000-26000	5250.00	-63.59	NA	0.4375	NA	20	Pass
NVNT	n40	5230	30-1000	868.08	-89.21	NA	0.0012	NA	4	Pass
NVNT	n40	5230	1000-26000	5250.00	-64.06	NA	0.3926	NA	20	Pass
NVNT	ac20	5180	30-1000	963.14	-89.76	NA	0.0011	NA	4	Pass
NVNT	ac20	5180	1000-26000	5250.00	-63.46	NA	0.4508	NA	20	Pass
NVNT	ac20	5200	30-1000	810.85	-90.11	NA	0.001	NA	4	Pass
NVNT	ac20	5200	1000-26000	5250.00	-63.63	NA	0.4335	NA	20	Pass
NVNT	ac20	5240	30-1000	819.58	-89.81	NA	0.001	NA	4	Pass
NVNT	ac20	5240	1000-26000	5250.00	-63.50	NA	0.4467	NA	20	Pass
NVNT	ac40	5190	30-1000	922.40	-89.21	NA	0.0012	NA	4	Pass
NVNT	ac40	5190	1000-26000	5250.00	-63.27	NA	0.471	NA	20	Pass
NVNT	ac40	5230	30-1000	895.24	-89.23	NA	0.0012	NA	4	Pass
NVNT	ac40	5230	1000-26000	5250.00	-63.62	NA	0.4345	NA	20	Pass
NVNT	ac80	5210	30-1000	919.49	-88.80	NA	0.0013	NA	4	Pass
NVNT	ac80	5210	1000-26000	5250.00	-61.81	NA	0.6592	NA	20	Pass
NVNT	ax20	5180	30-1000	701.92	-88.63	NA	0.0014	NA	4	Pass
NVNT	ax20	5180	1000-26000	5240.00	-63.95	NA	0.4027	NA	20	Pass
NVNT	ax20	5200	30-1000	879.33	-89.97	NA	0.001	NA	4	Pass
NVNT	ax20	5200	1000-26000	5240.00	-63.48	NA	0.4487	NA	20	Pass
NVNT	ax20	5240	30-1000	893.49	-89.47	NA	0.0011	NA	4	Pass
NVNT	ax20	5240	1000-26000	5240.00	-63.73	NA	0.4236	NA	20	Pass
NVNT	ax40	5190	30-1000	998.25	-89.85	NA	0.001	NA	4	Pass
NVNT	ax40	5190	1000-26000	5240.00	-63.91	NA	0.4064	NA	20	Pass
NVNT	ax40	5230	30-1000	896.40	-90.10	NA	0.001	NA	4	Pass
NVNT	ax40	5230	1000-26000	5240.00	-63.77	NA	0.4198	NA	20	Pass
NVNT	ax80	5210	30-1000	350.29	-89.68	NA	0.0011	NA	4	Pass
NVNT	ax80	5210	1000-26000	24767.50	-63.91	NA	0.4064	NA	20	Pass

MIMO:

Condition	Mode	Frequency (MHz)	Range (MHz)	Emission Frequency (MHz)	Max Peak Value (dBm)	Max RMS Value (dBm)	Max Peak Value (nW)	Max RMS Value (nW)	Limit (nW)	Verdict
NVNT	n20	5180	30-1000	904.94	-73.43	NA	0.0454	NA	4	Pass
NVNT	n20	5180	1000-26000	25025.00	-64.08	NA	0.3908	NA	20	Pass
NVNT	n20	5200	30-1000	77.53	-84.80	NA	0.0033	NA	4	Pass
NVNT	n20	5200	1000-26000	25200.00	-64.13	NA	0.3864	NA	20	Pass
NVNT	n20	5240	30-1000	729.37	-61.52	-86.95	0.7047	0.002	4	Pass
NVNT	n20	5240	1000-26000	24875.00	-63.78	NA	0.4188	NA	20	Pass
NVNT	n40	5190	30-1000	77.53	-81.16	NA	0.0077	NA	4	Pass
NVNT	n40	5190	1000-26000	25025.00	-63.61	NA	0.4355	NA	20	Pass
NVNT	n40	5230	30-1000	77.53	-84.40	NA	0.0036	NA	4	Pass
NVNT	n40	5230	1000-26000	2425.00	-59.80	NA	1.0471	NA	20	Pass
NVNT	ac20	5180	30-1000	913.67	-81.67	NA	0.0068	NA	4	Pass
NVNT	ac20	5180	1000-26000	24875.00	-64.47	NA	0.3573	NA	20	Pass
NVNT	ac20	5200	30-1000	77.53	-81.55	NA	0.007	NA	4	Pass
NVNT	ac20	5200	1000-26000	5800.00	-60.18	NA	0.9594	NA	20	Pass
NVNT	ac20	5240	30-1000	912.70	-73.82	NA	0.0415	NA	4	Pass
NVNT	ac20	5240	1000-26000	5775.00	-63.55	NA	0.4416	NA	20	Pass
NVNT	ac40	5190	30-1000	77.53	-84.09	NA	0.0039	NA	4	Pass
NVNT	ac40	5190	1000-26000	5800.00	-58.18	NA	1.5205	NA	20	Pass
NVNT	ac40	5230	30-1000	77.53	-83.21	NA	0.0048	NA	4	Pass
NVNT	ac40	5230	1000-26000	25125.00	-63.20	NA	0.4786	NA	20	Pass
NVNT	ac80	5210	30-1000	77.53	-83.69	NA	0.0043	NA	4	Pass
NVNT	ac80	5210	1000-26000	24825.00	-64.01	NA	0.3972	NA	20	Pass
NVNT	ax20	5180	30-1000	77.24	-82.59	NA	0.0055	NA	4	Pass
NVNT	ax20	5180	1000-26000	5790.00	-60.12	NA	0.9727	NA	20	Pass
NVNT	ax20	5200	30-1000	775.06	-89.66	NA	0.0011	NA	4	Pass
NVNT	ax20	5200	1000-26000	24855.00	-64.11	NA	0.3882	NA	20	Pass
NVNT	ax20	5240	30-1000	904.65	-79.15	NA	0.0122	NA	4	Pass
NVNT	ax20	5240	1000-26000	24952.50	-63.93	NA	0.4046	NA	20	Pass
NVNT	ax40	5190	30-1000	78.11	-84.45	NA	0.0036	NA	4	Pass
NVNT	ax40	5190	1000-26000	5790.00	-63.96	NA	0.4018	NA	20	Pass
NVNT	ax40	5230	30-1000	77.24	-82.09	NA	0.0062	NA	4	Pass
NVNT	ax40	5230	1000-26000	25172.50	-64.25	NA	0.3758	NA	20	Pass
NVNT	ax80	5210	30-1000	913.09	-69.85	NA	0.1035	NA	4	Pass
NVNT	ax80	5210	1000-26000	24882.50	-64.55	NA	0.3508	NA	20	Pass


Test Graphs



Rx. Spurious NVNT a 5180MHz Ant A @ 30MHz-1000MHz

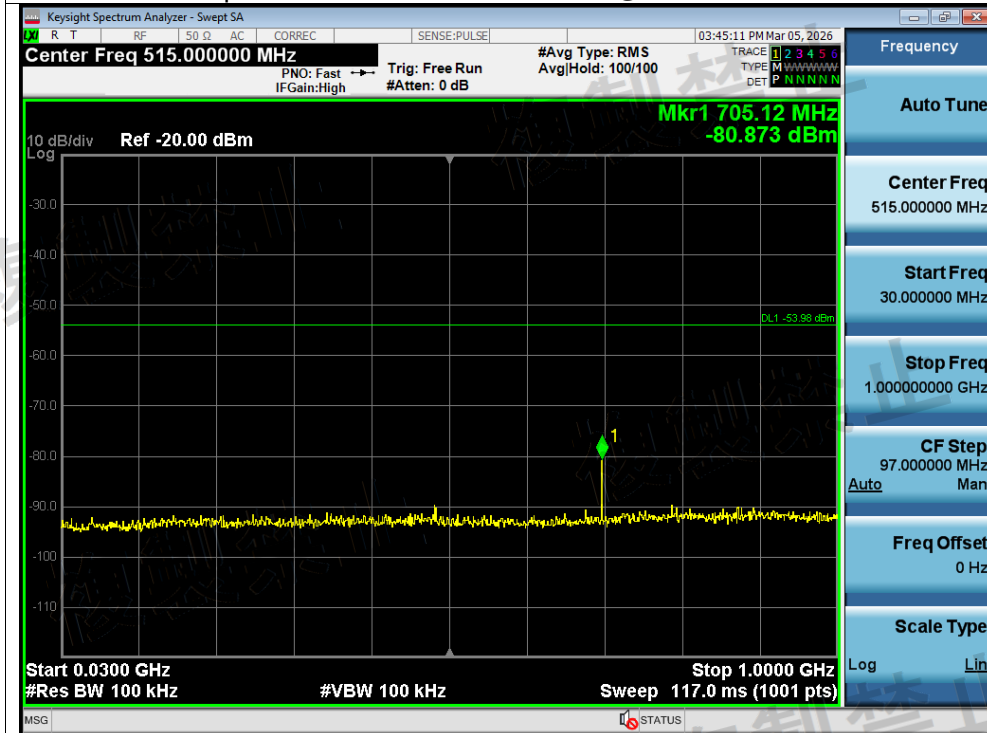



Rx. Spurious NVNT a 5180MHz Ant A @ 1000MHz-26000MHz




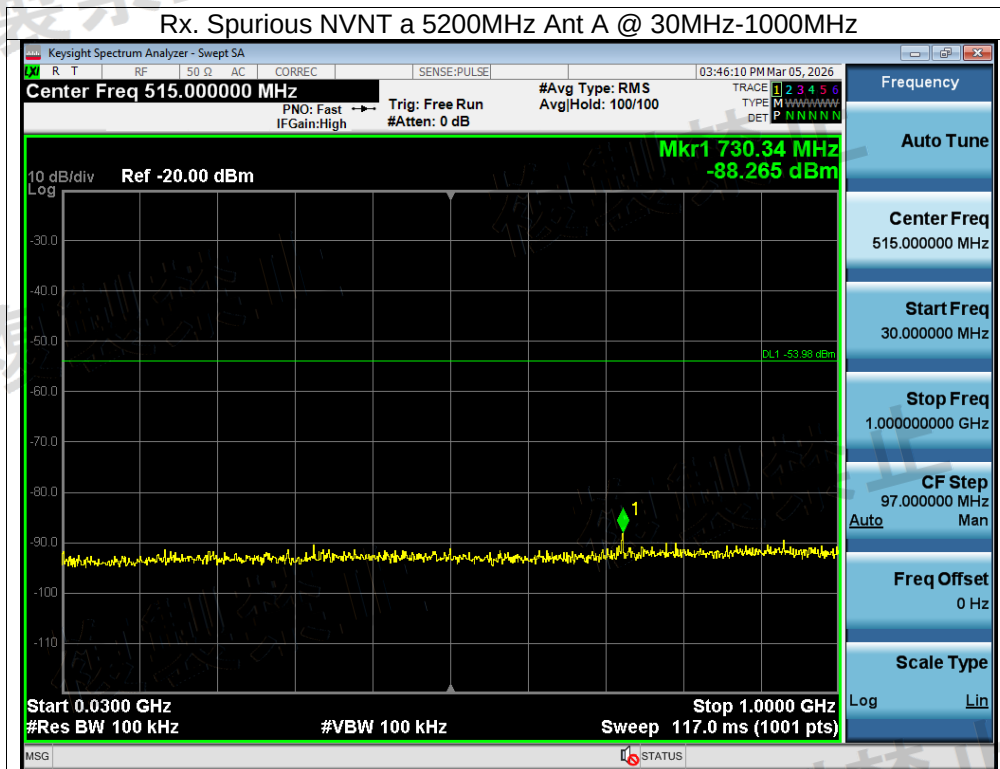


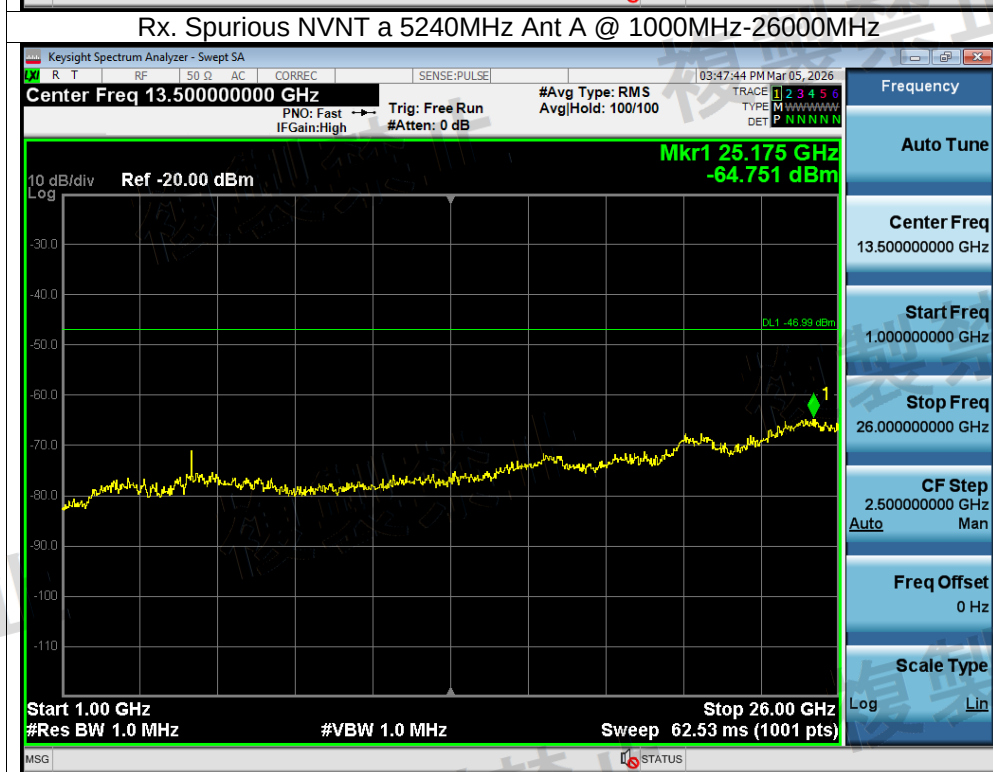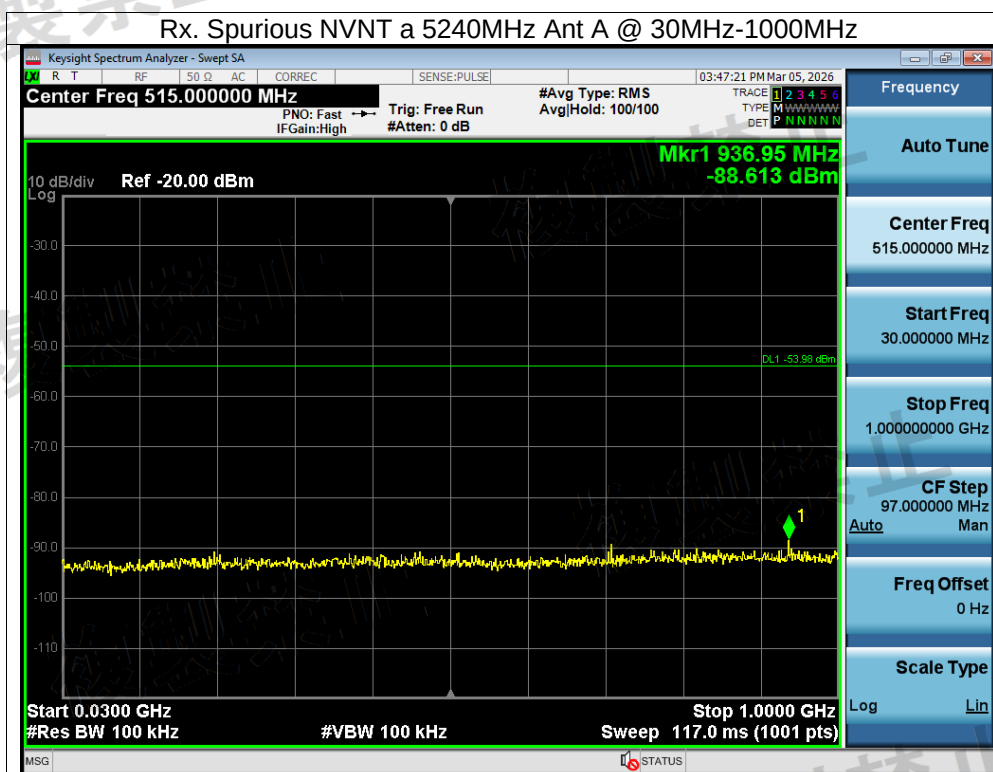


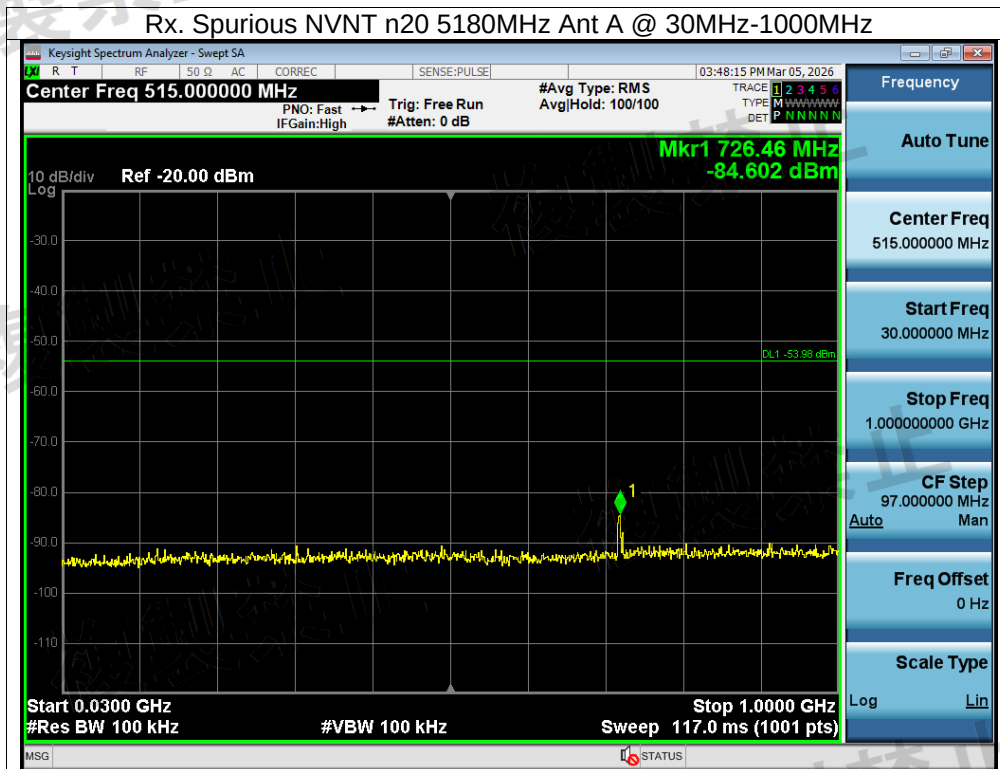

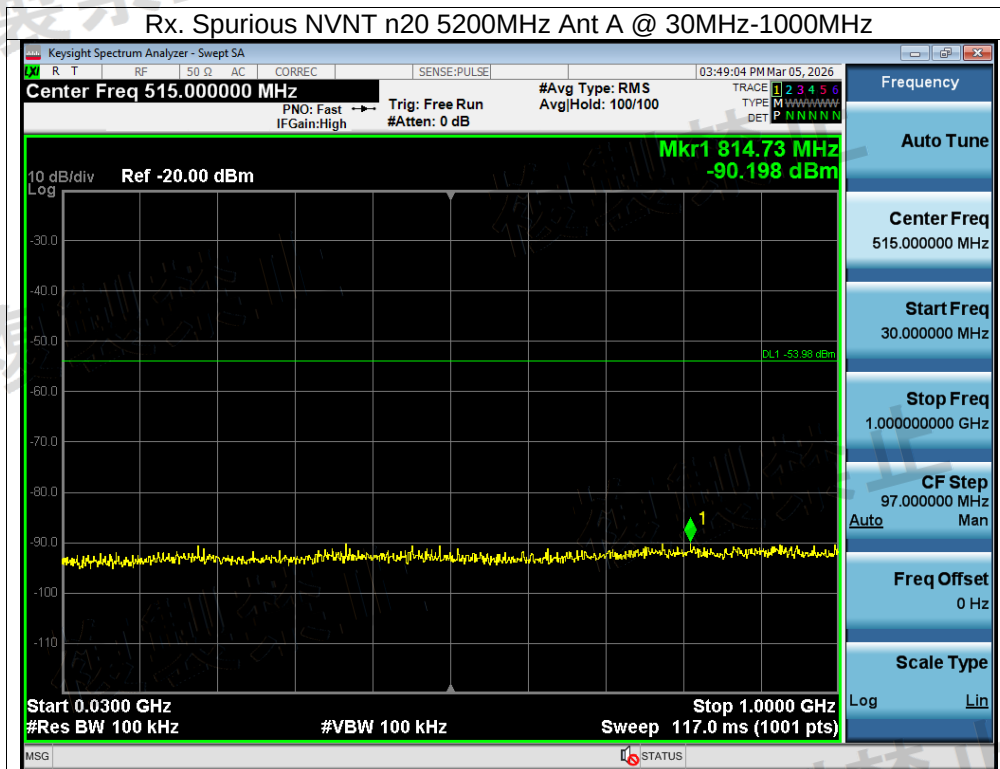


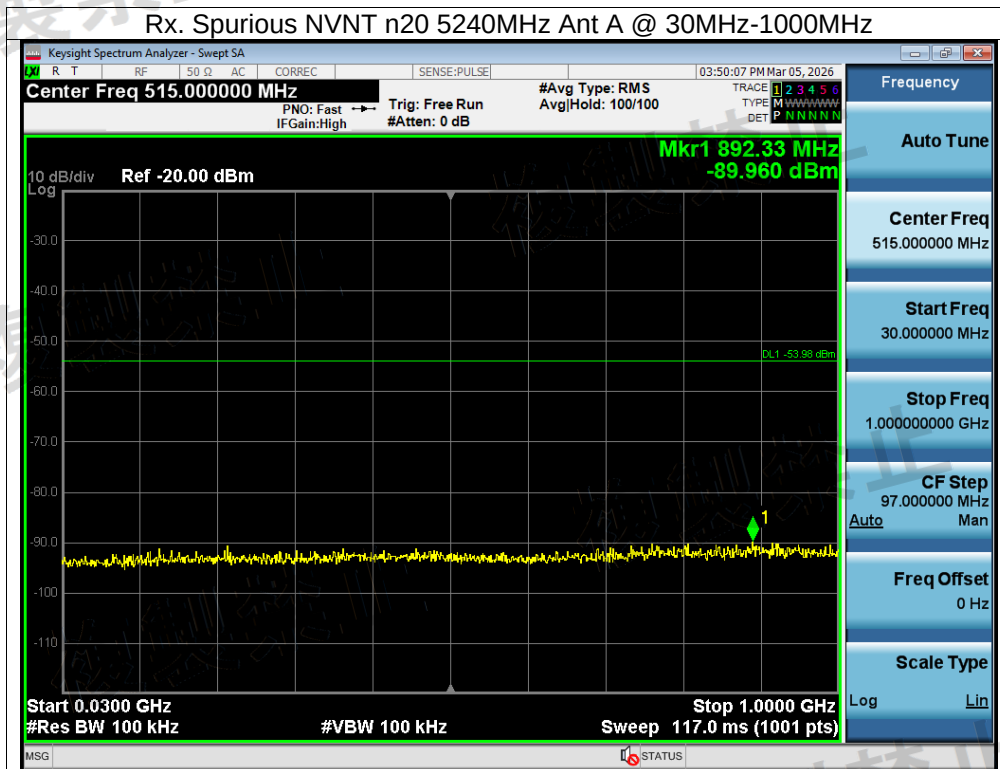

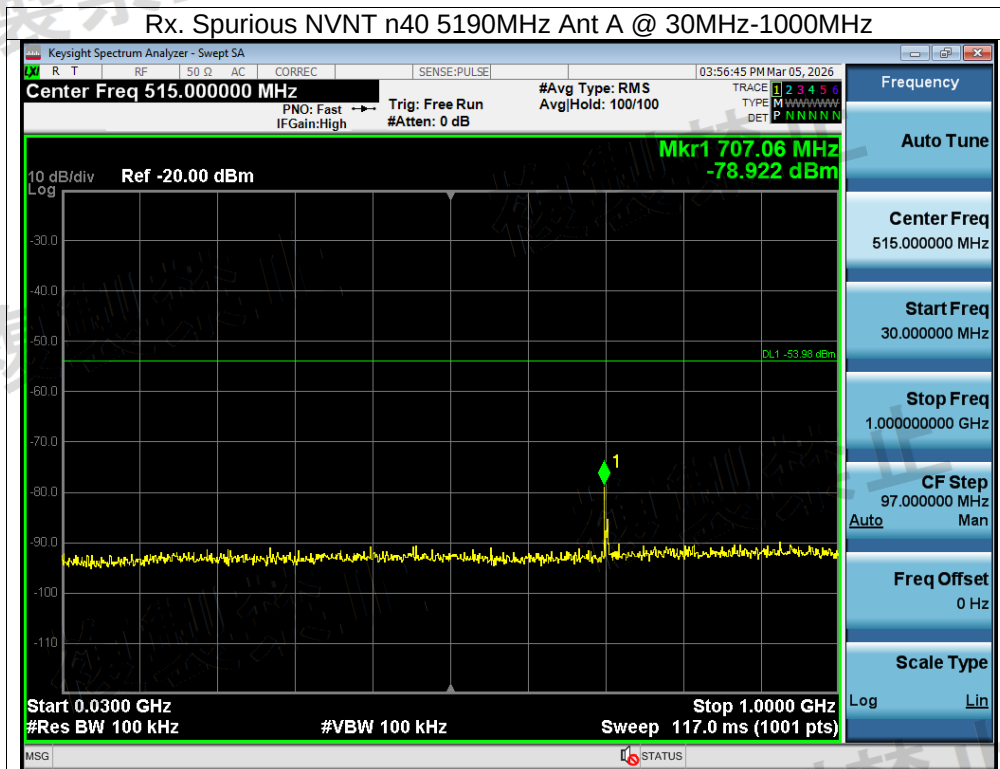

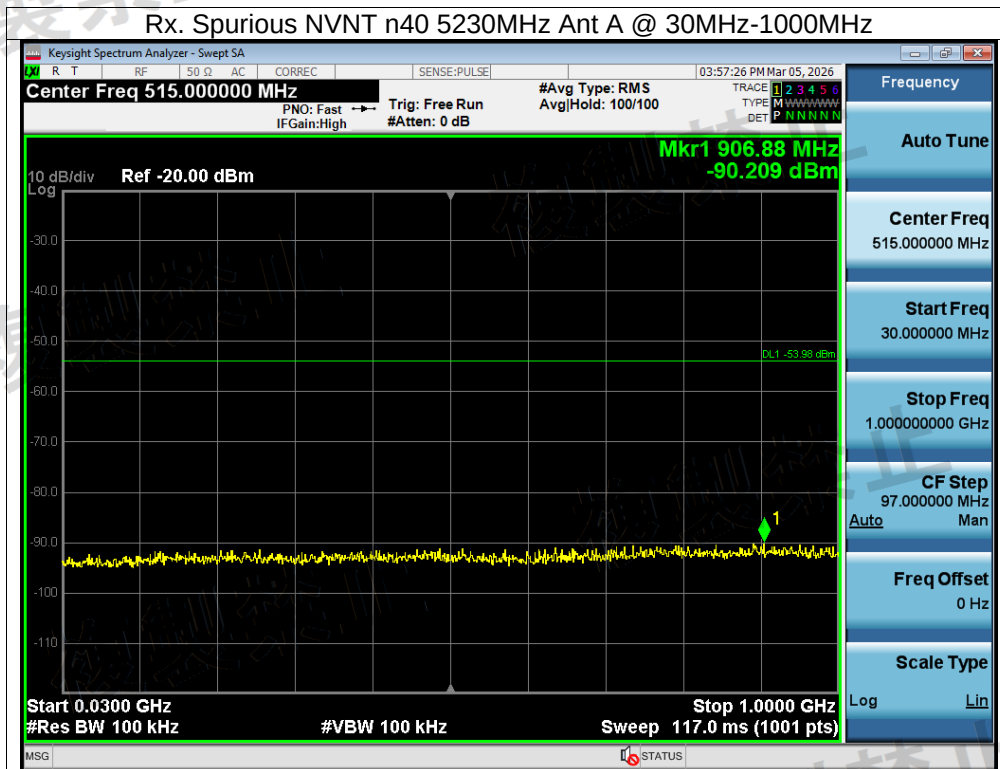



Rx. Spurious NVNT ac20 5180MHz Ant A @ 30MHz-1000MHz

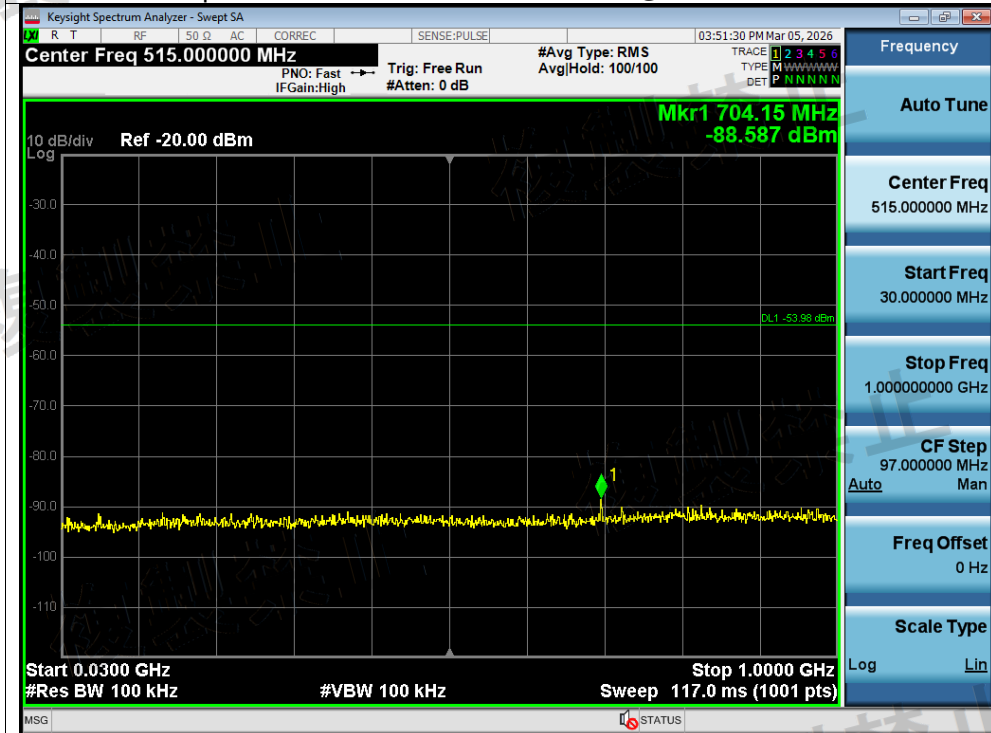


Rx. Spurious NVNT ac20 5180MHz Ant A @ 1000MHz-26000MHz




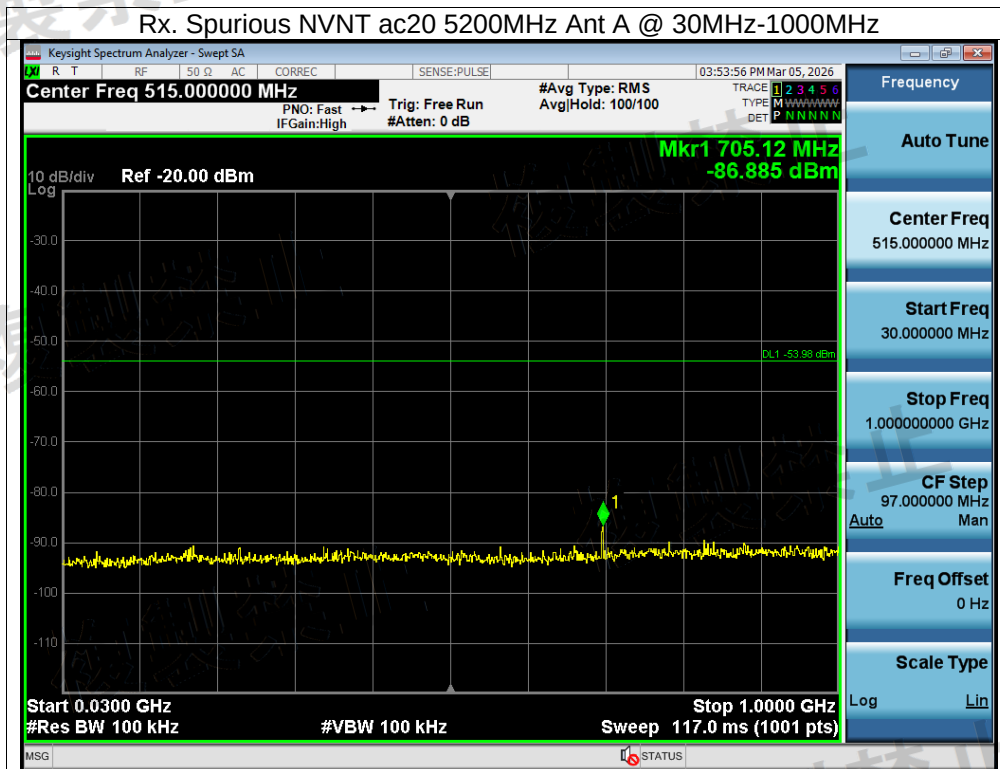

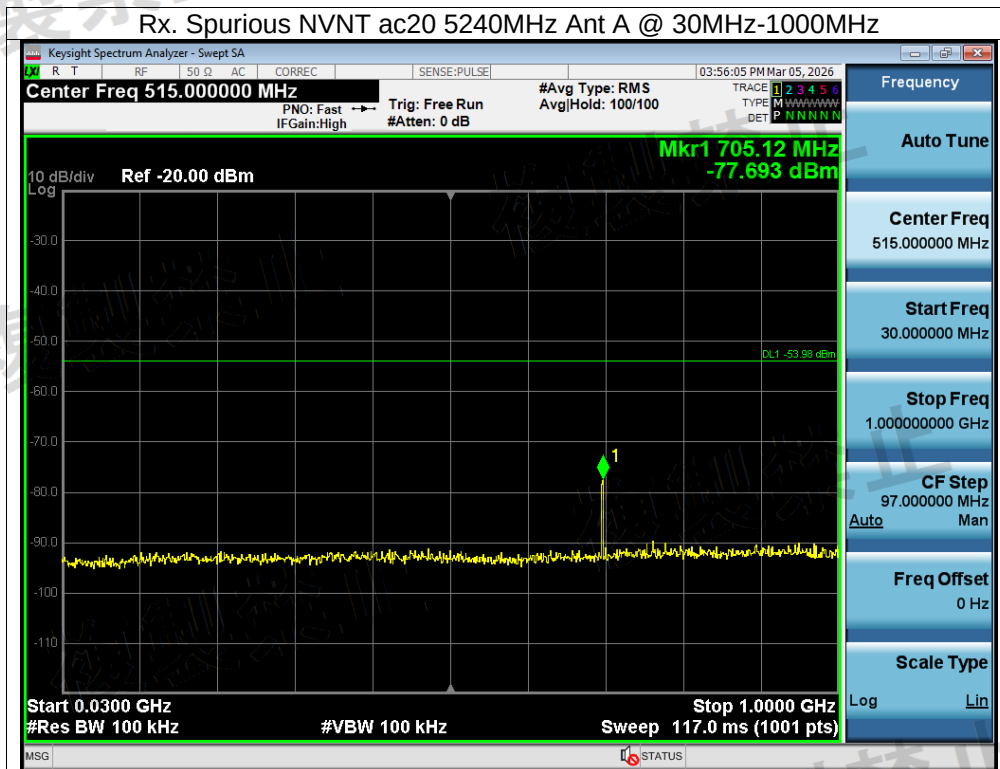

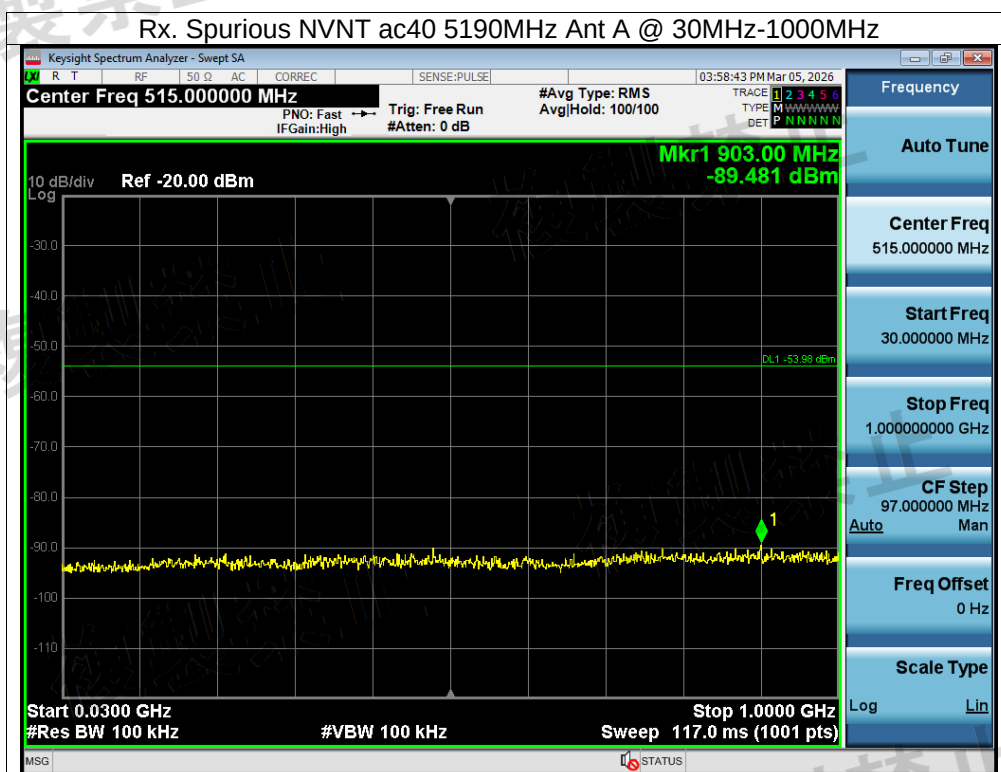



Rx. Spurious NVNT ac40 5230MHz Ant A @ 30MHz-1000MHz

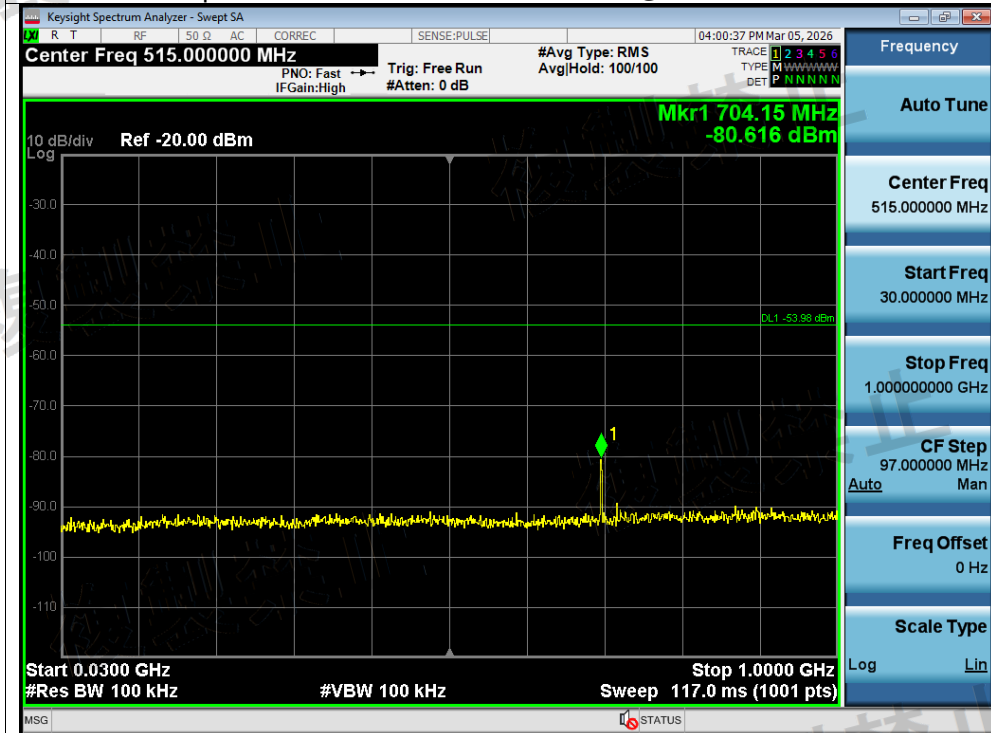



Rx. Spurious NVNT ac40 5230MHz Ant A @ 1000MHz-26000MHz




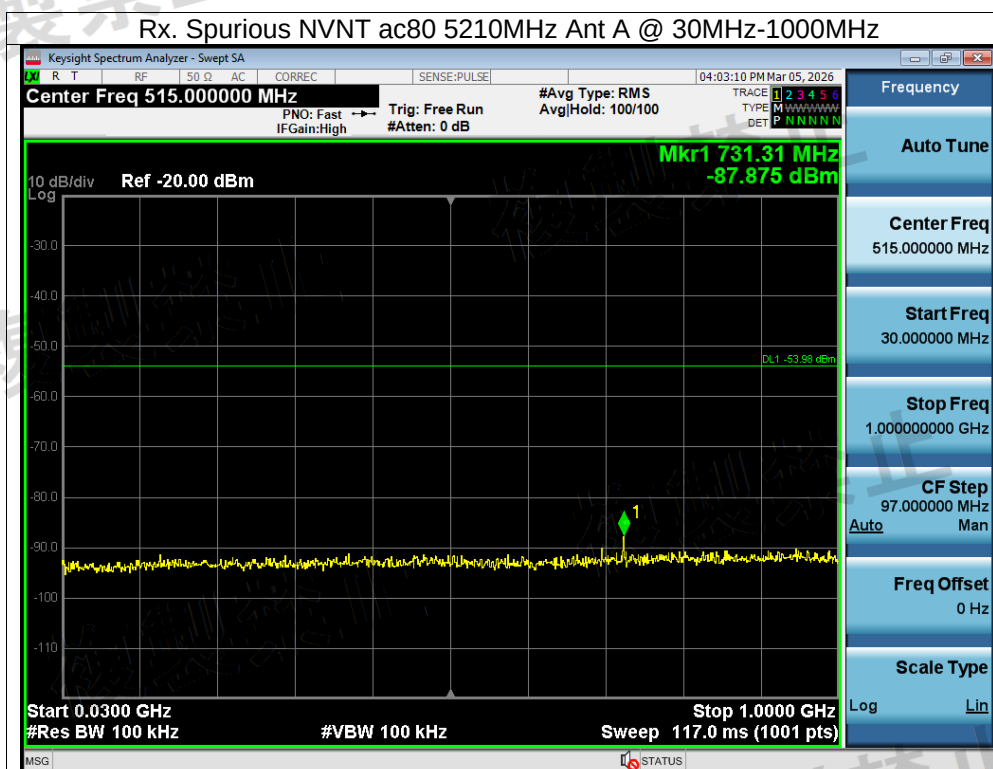


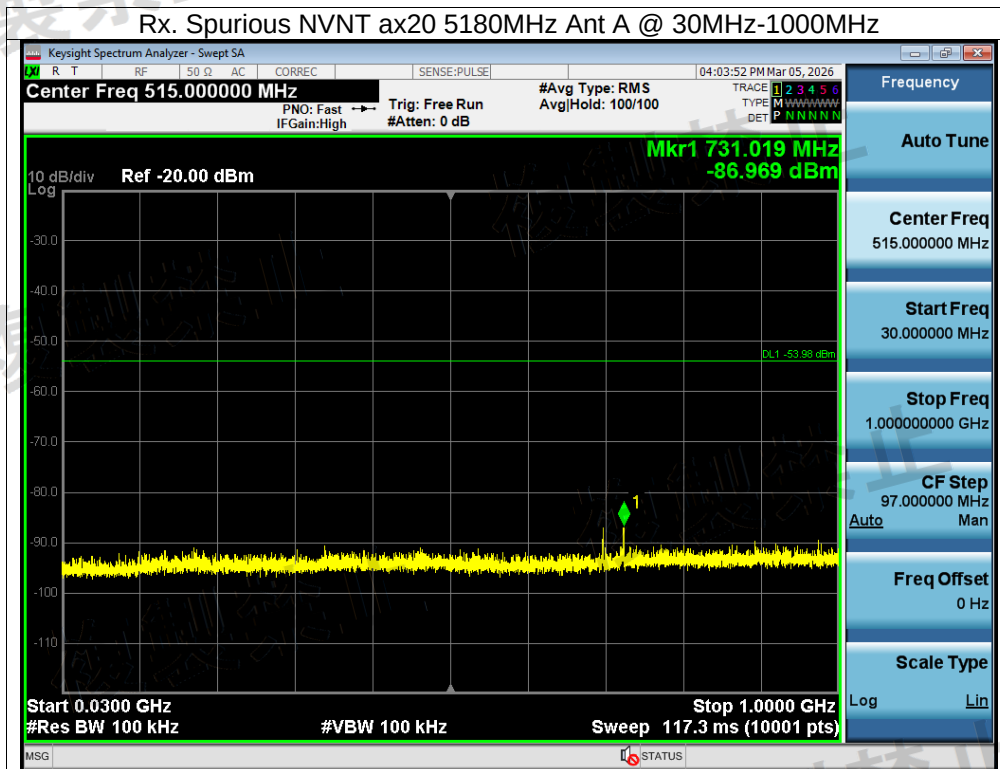


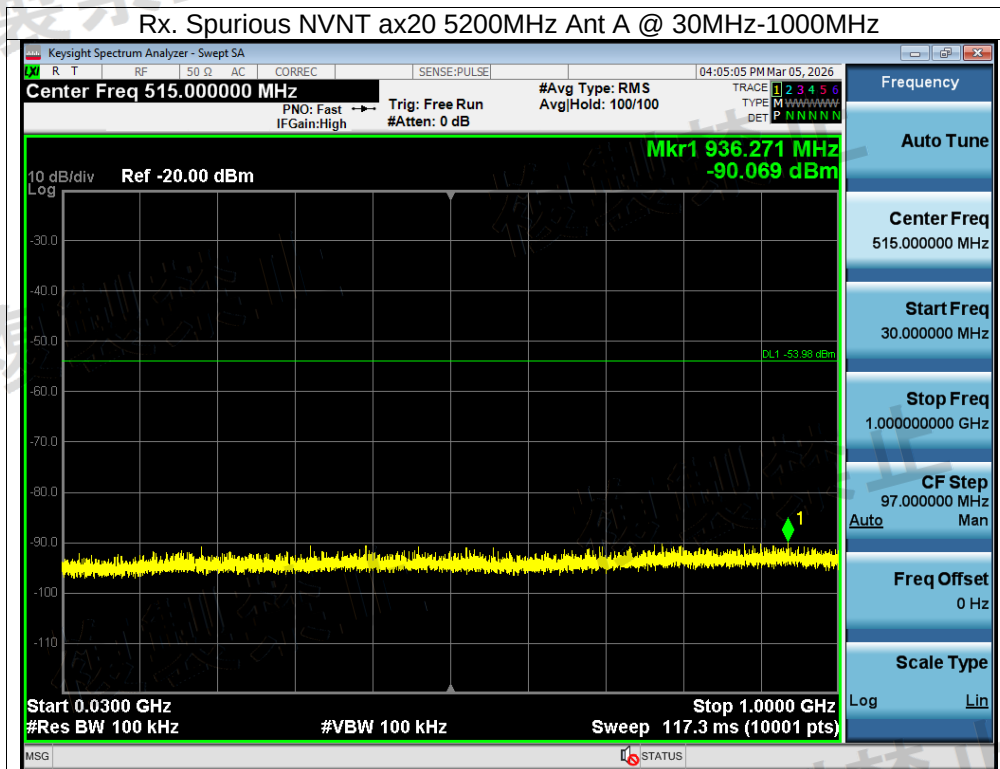

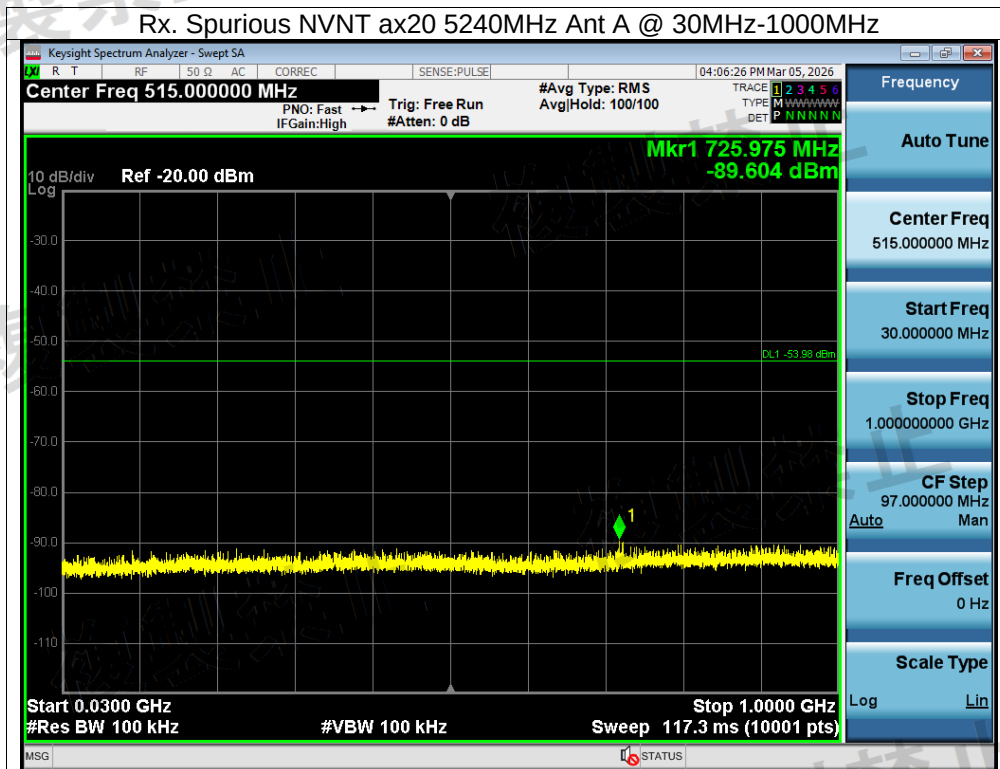

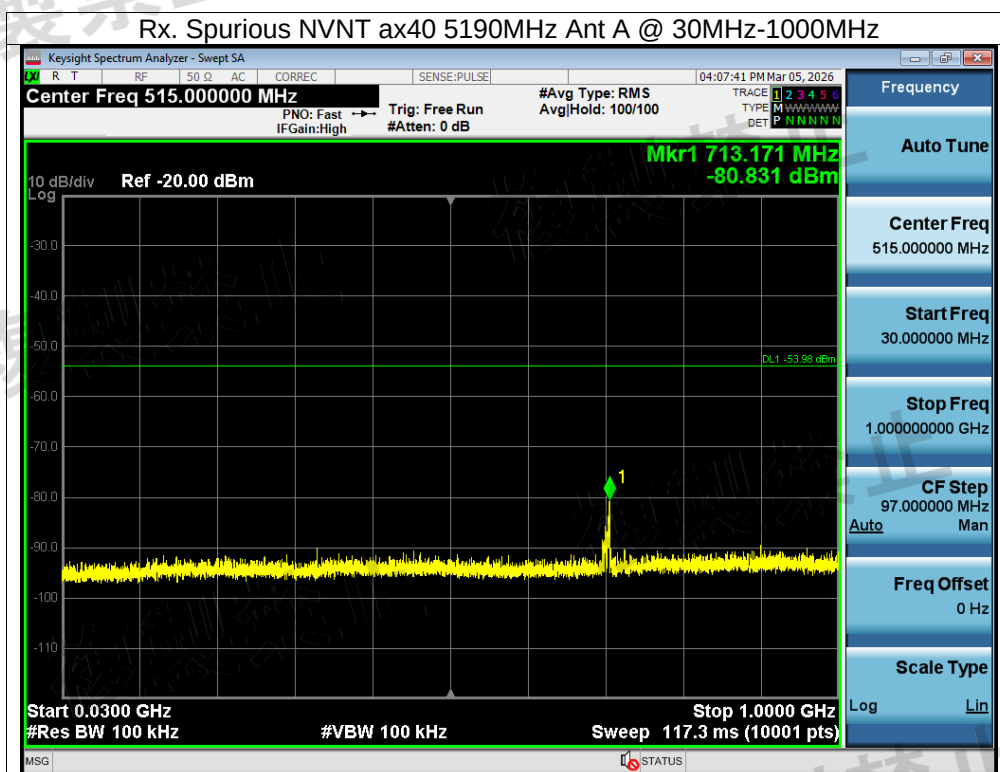


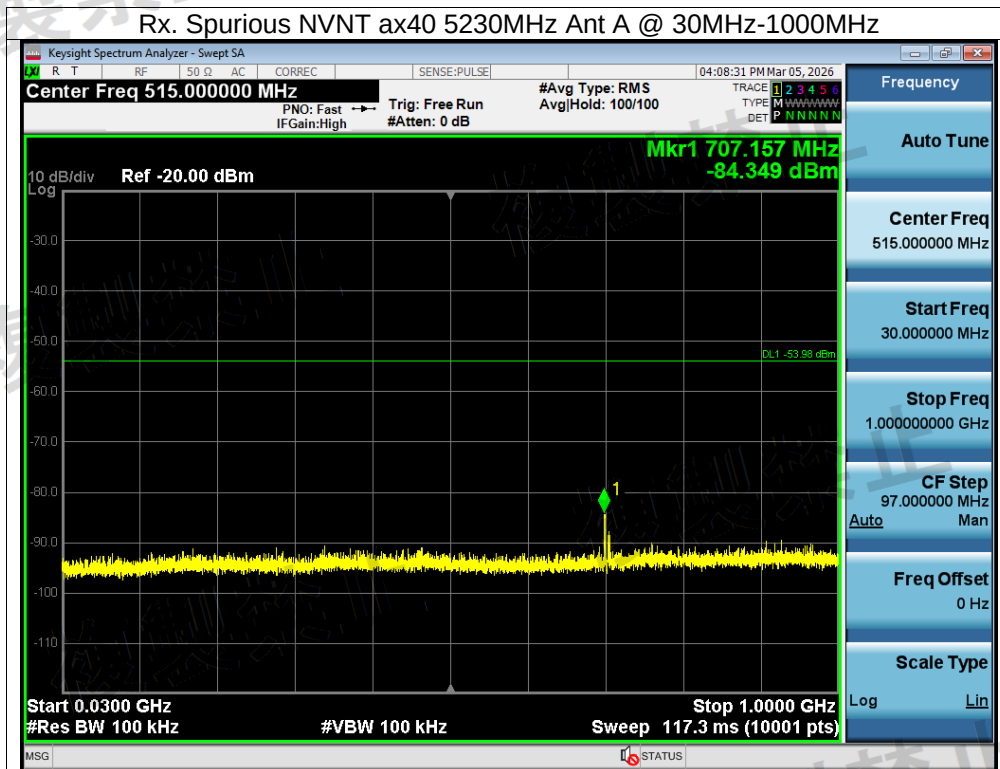

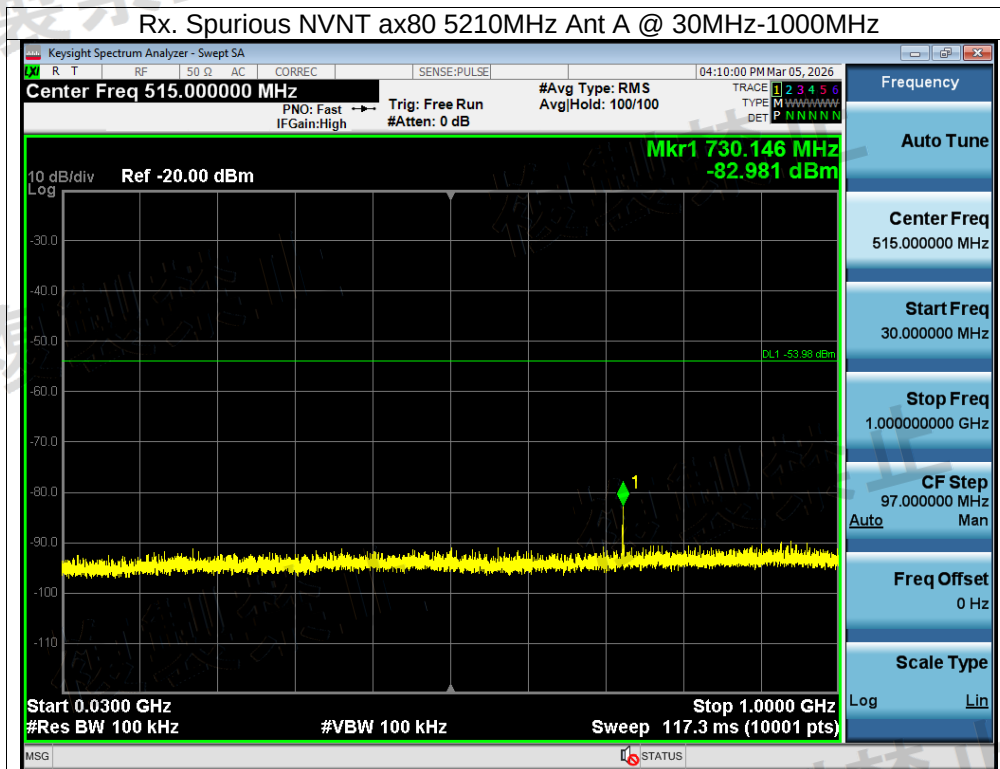




Test Graphs



Rx. Spurious NVNT a 5180MHz Ant B @ 30MHz-1000MHz

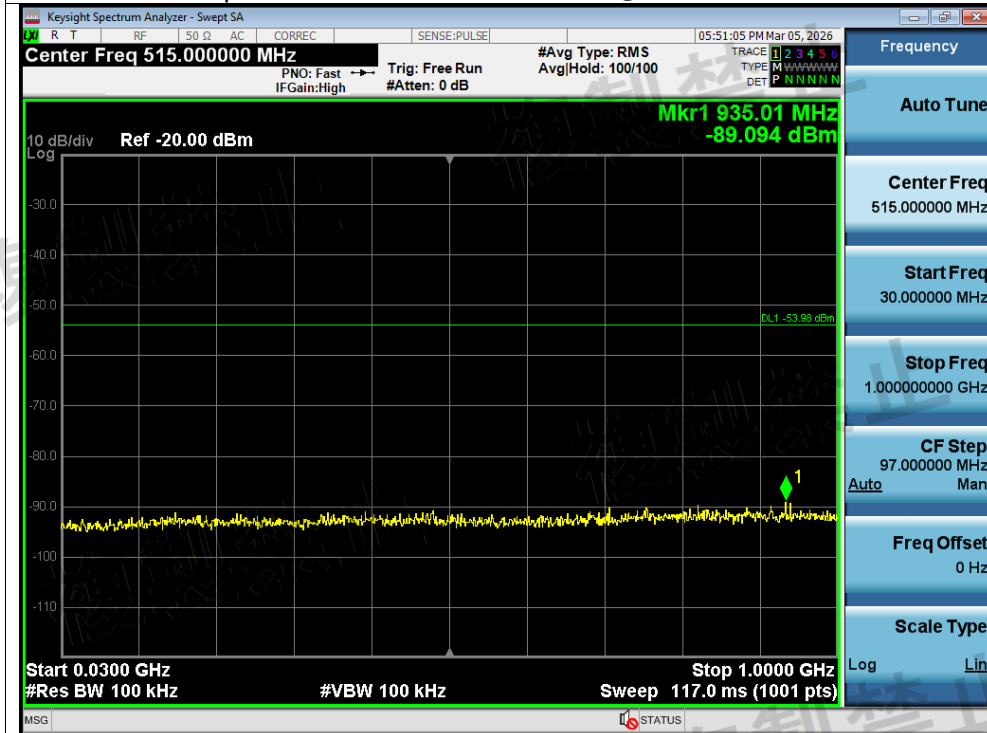



Rx. Spurious NVNT a 5180MHz Ant B @ 1000MHz-26000MHz


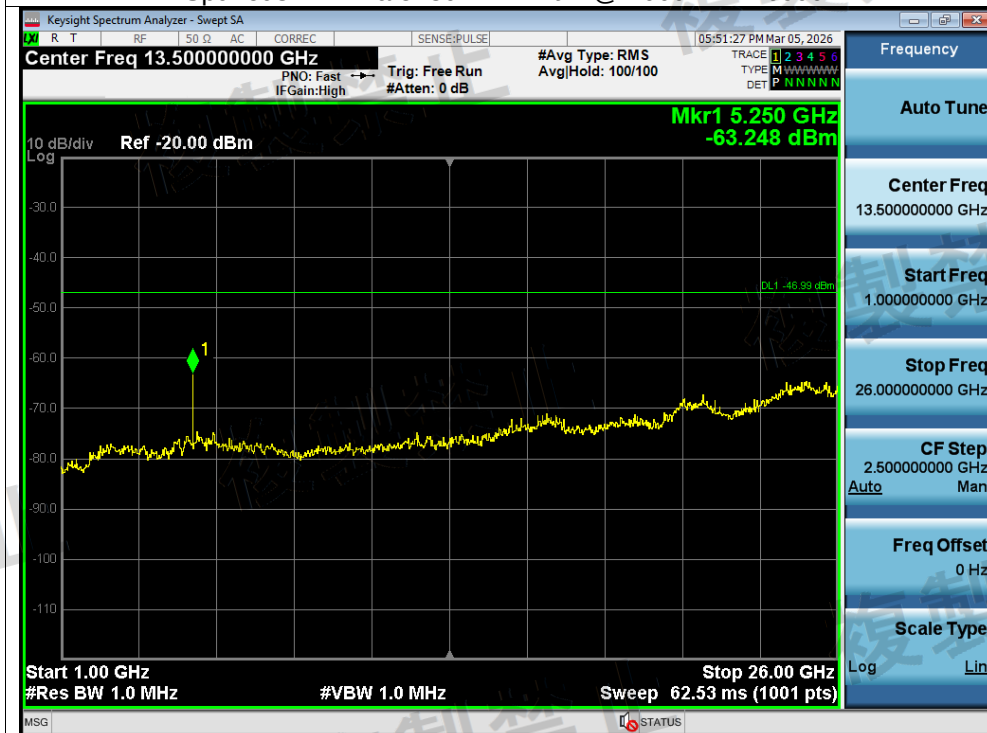


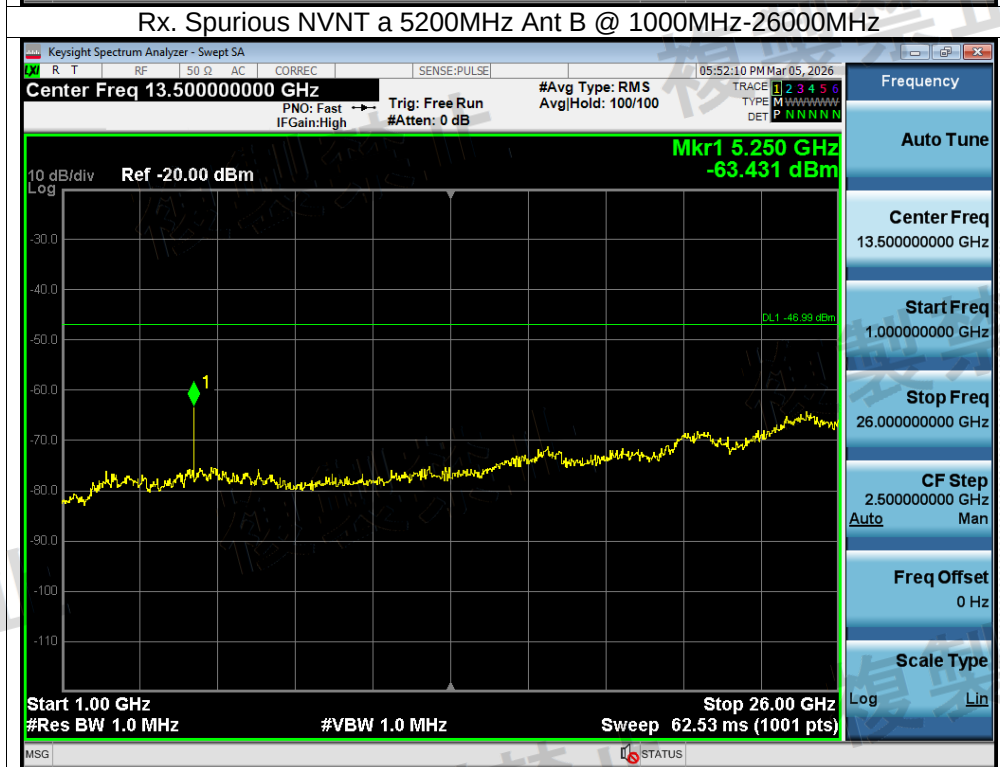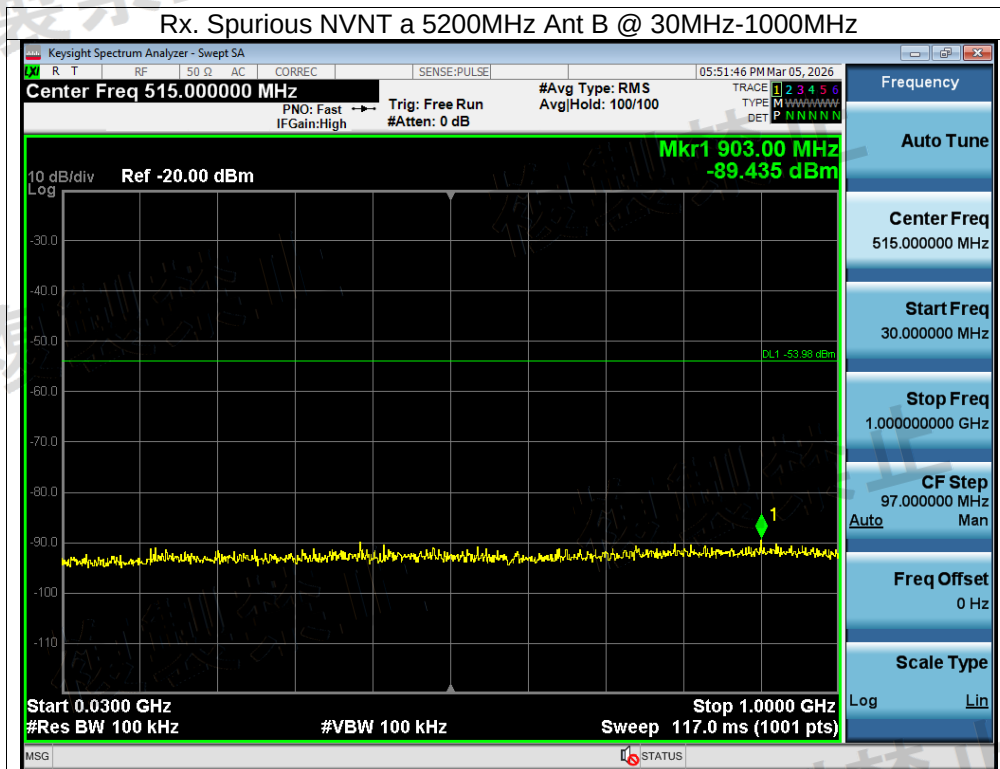


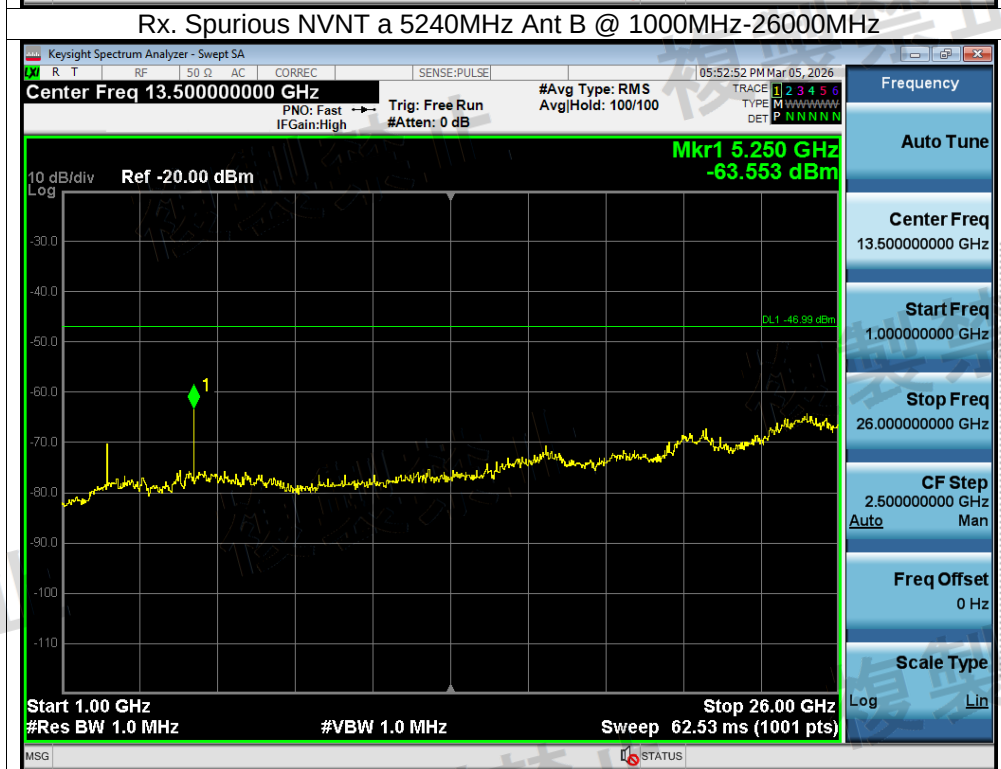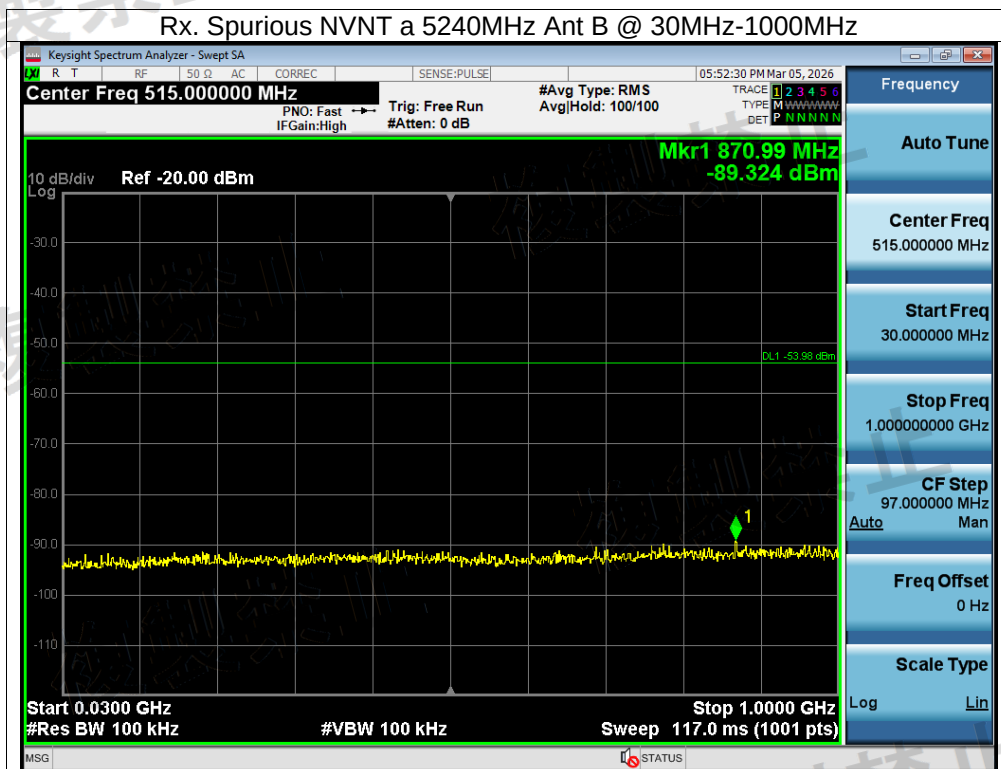


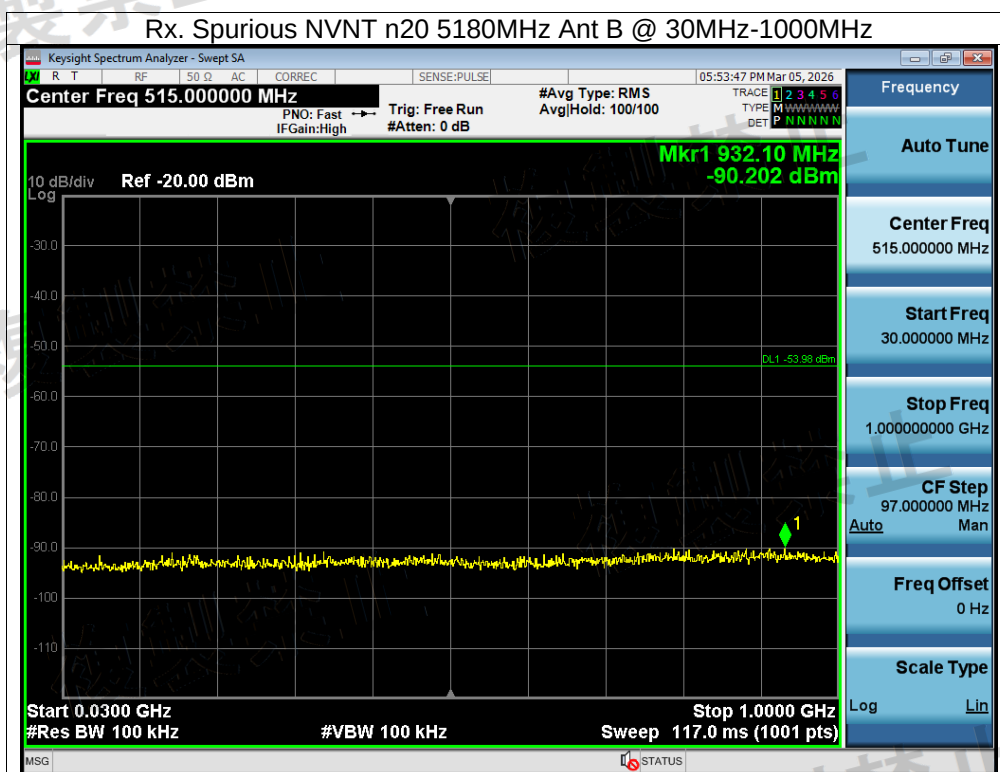



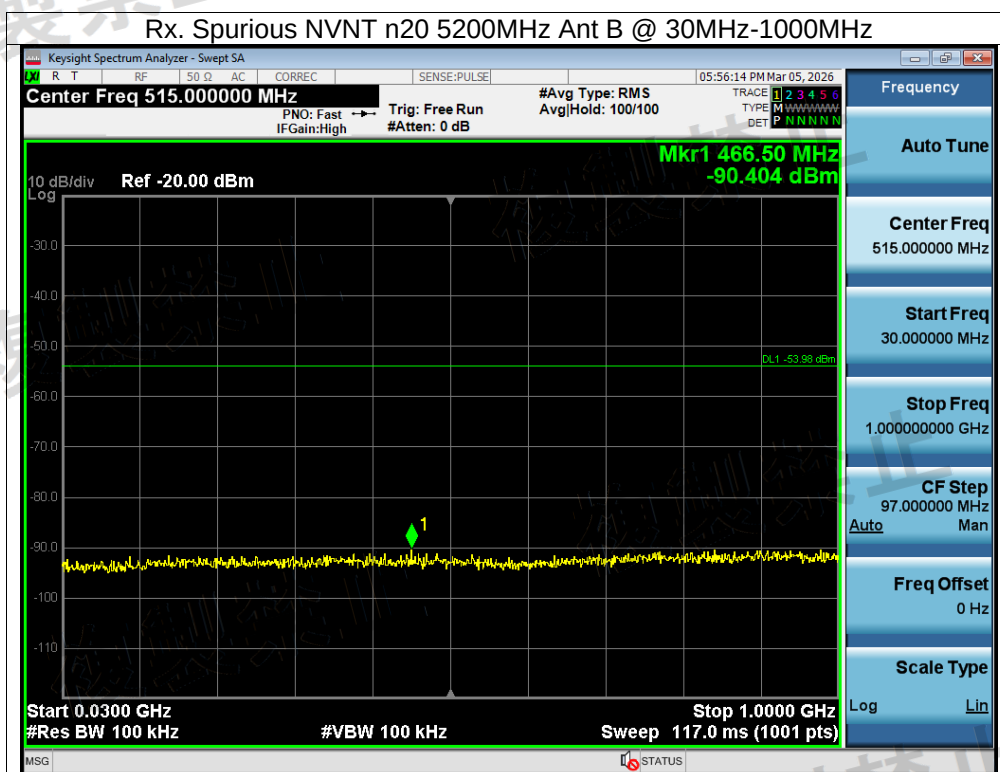


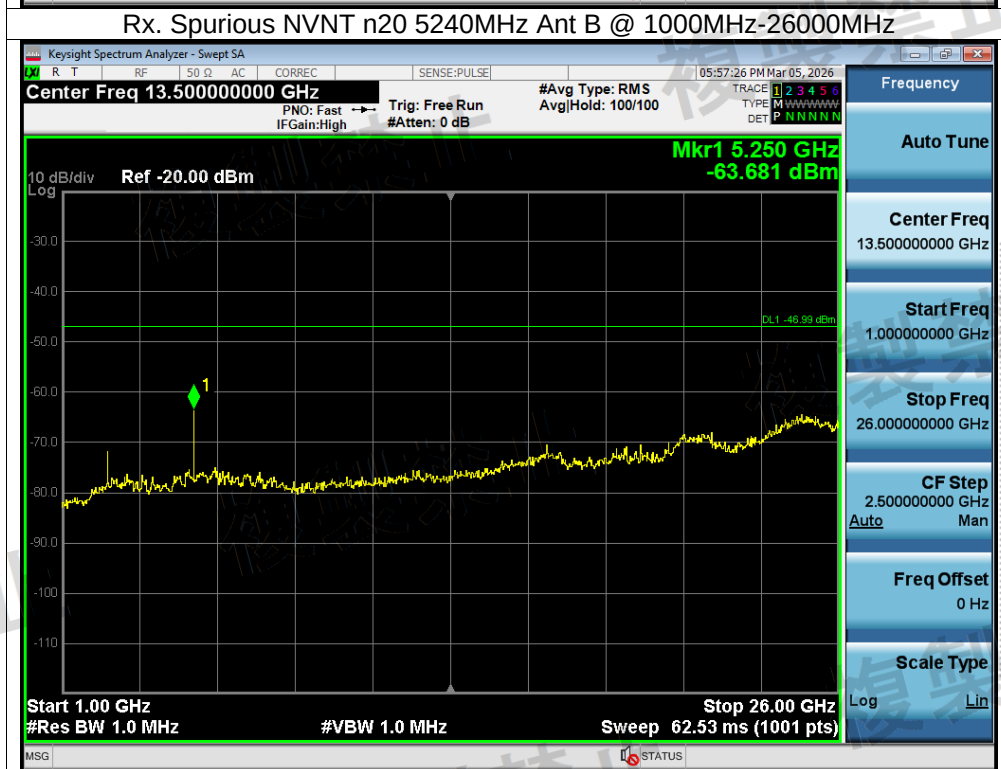
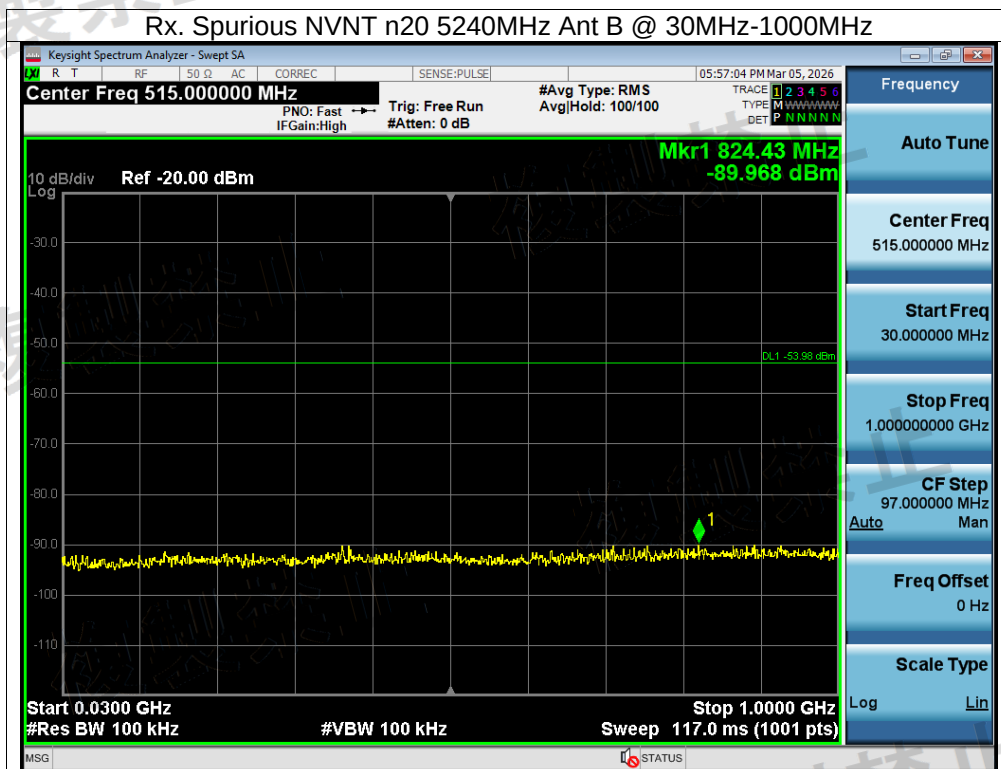


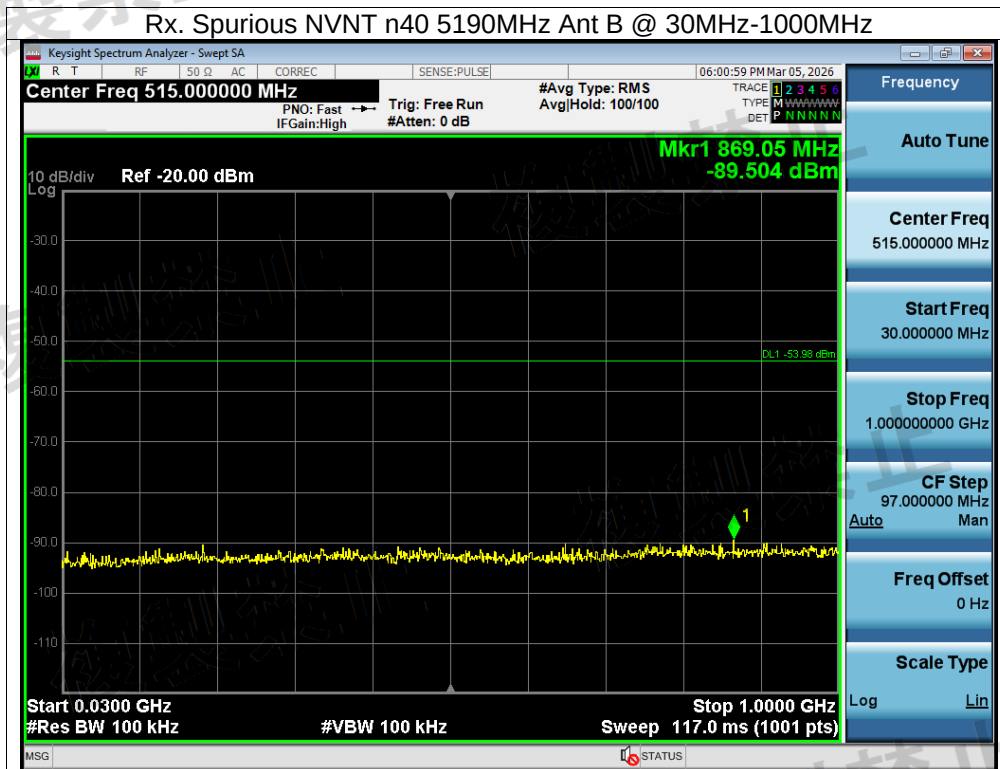


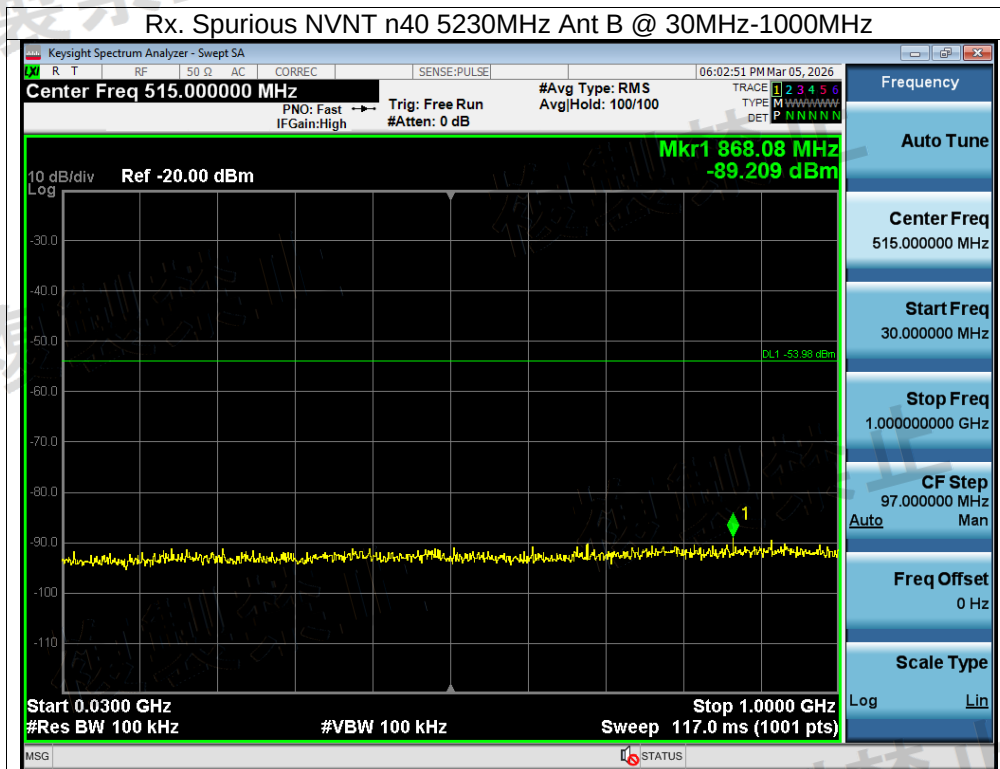


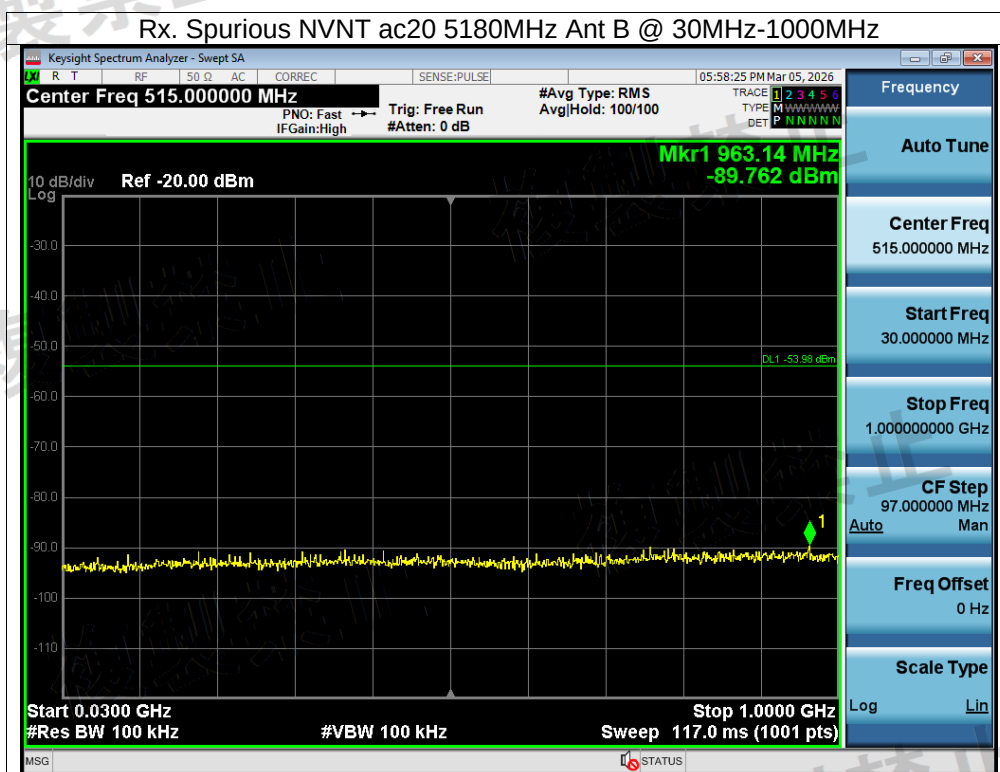


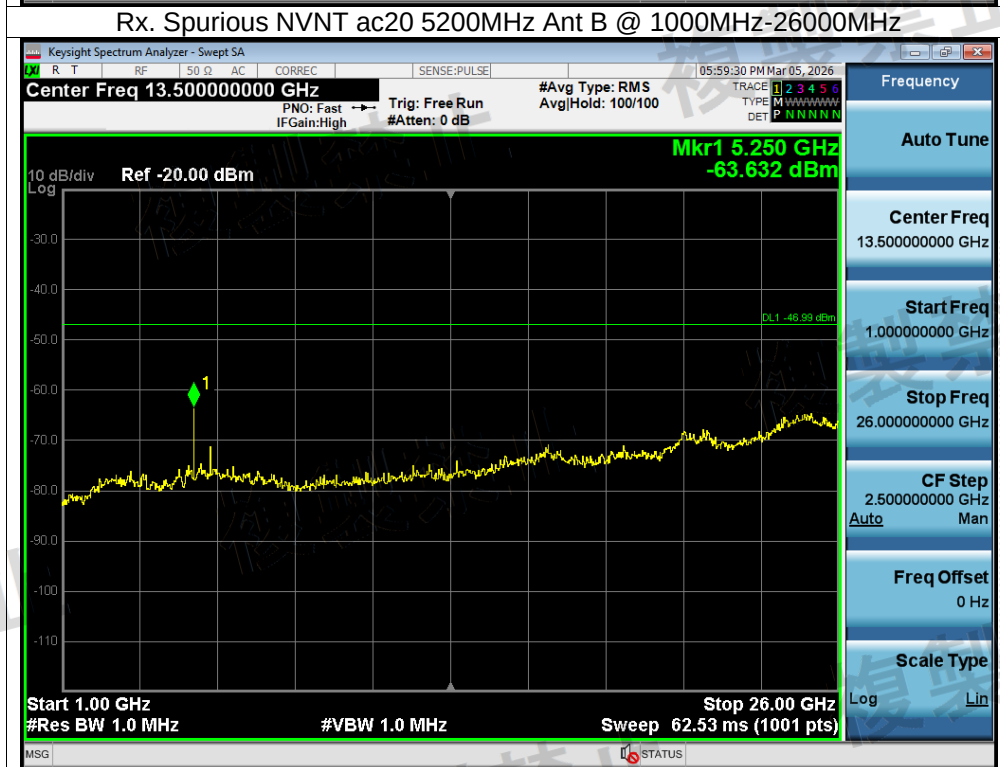
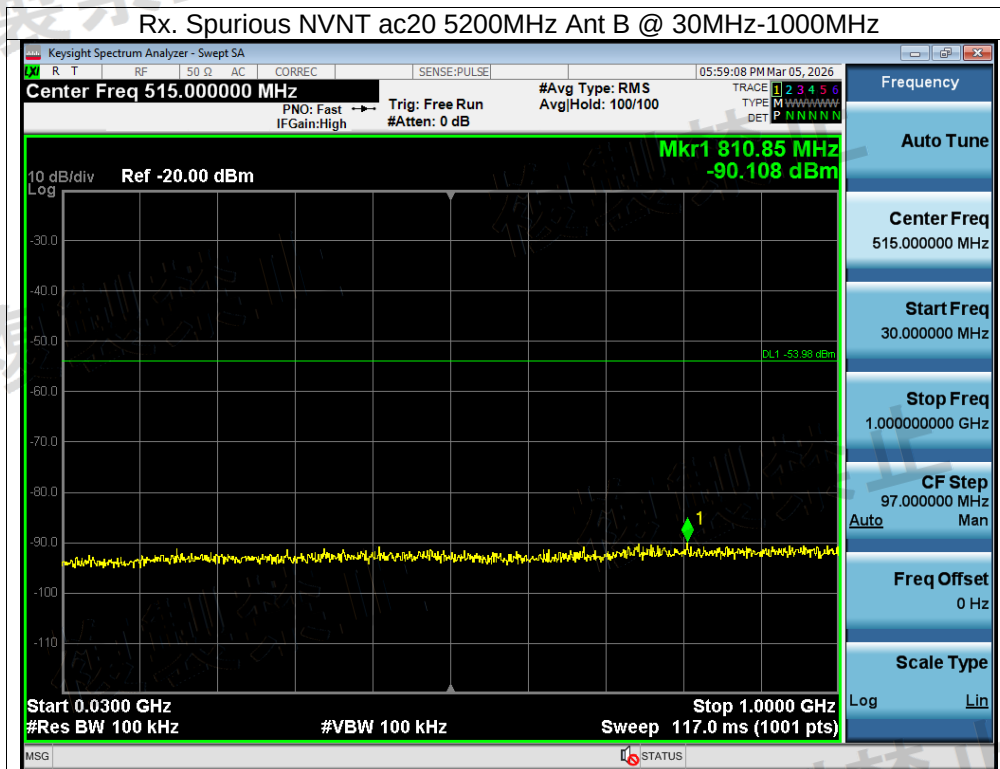


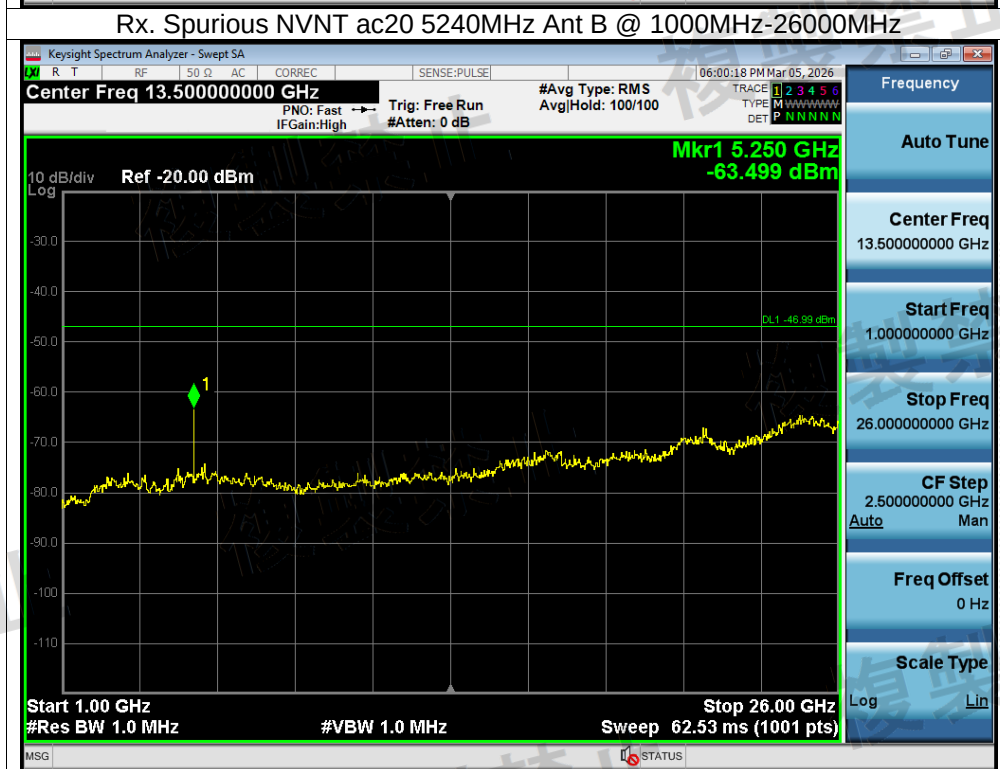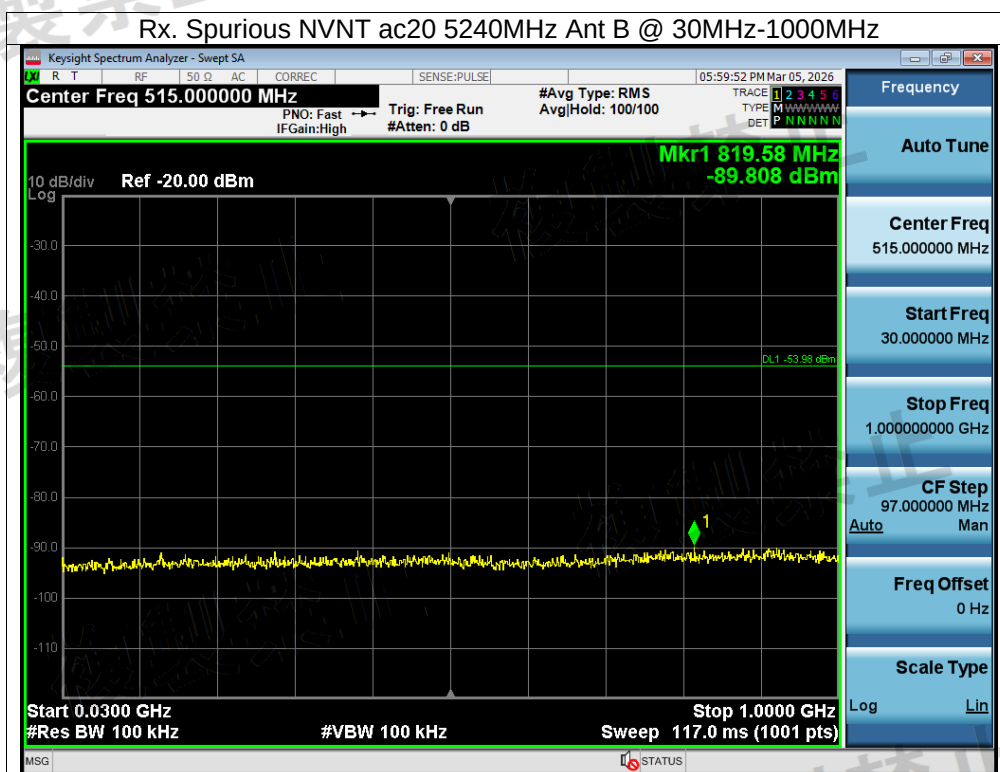



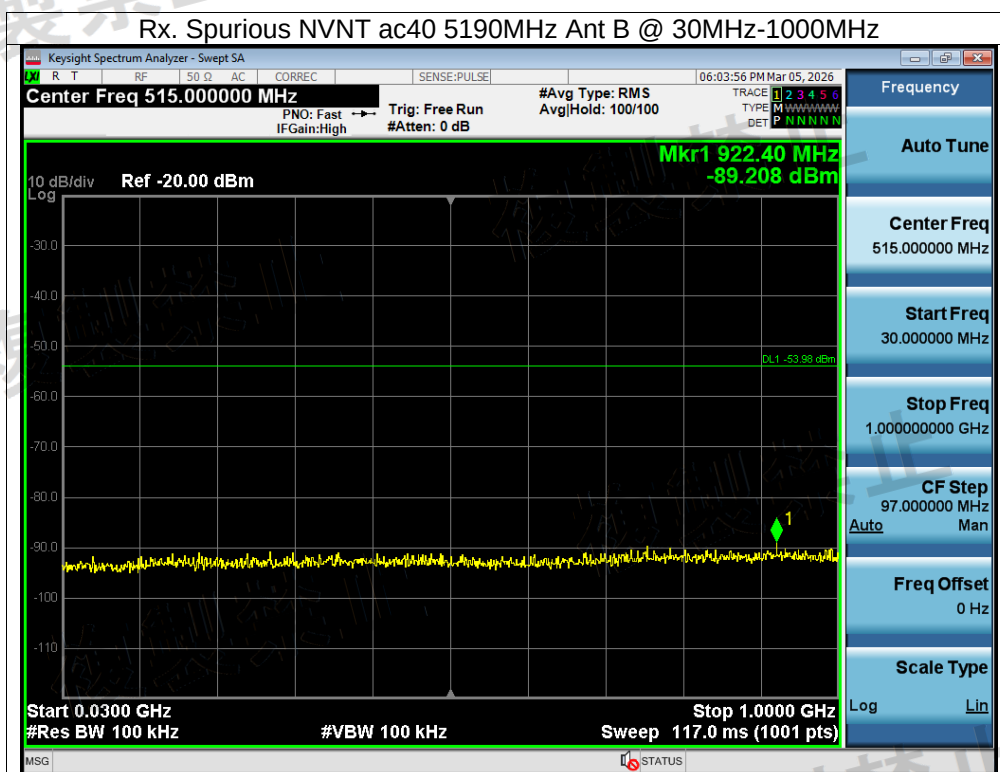



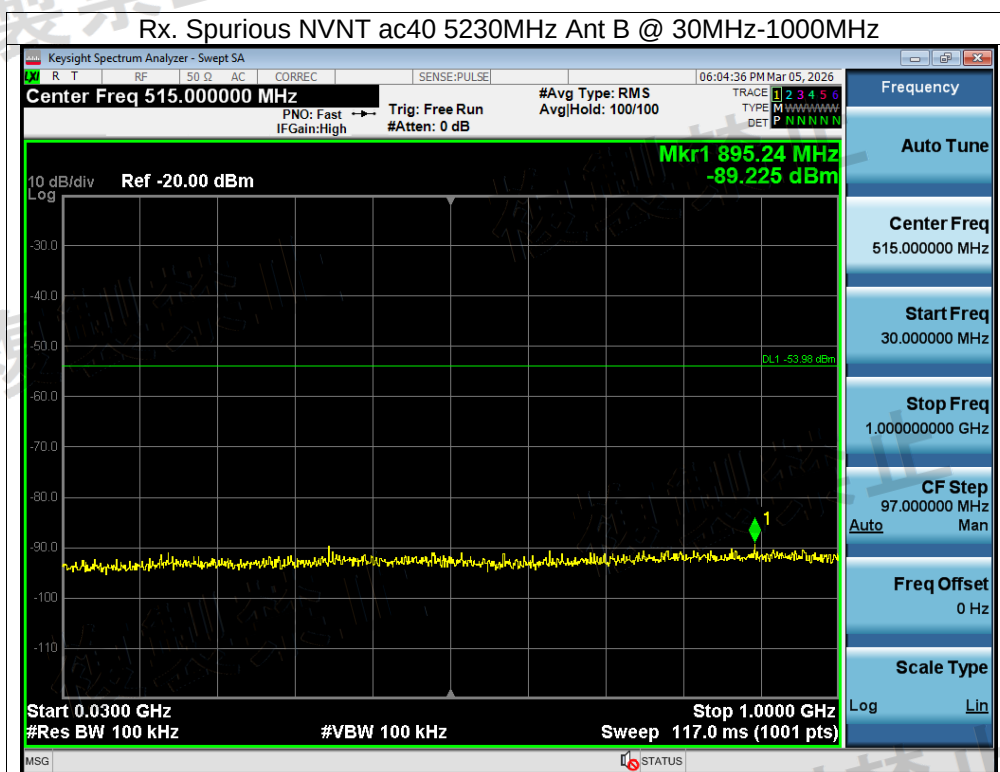



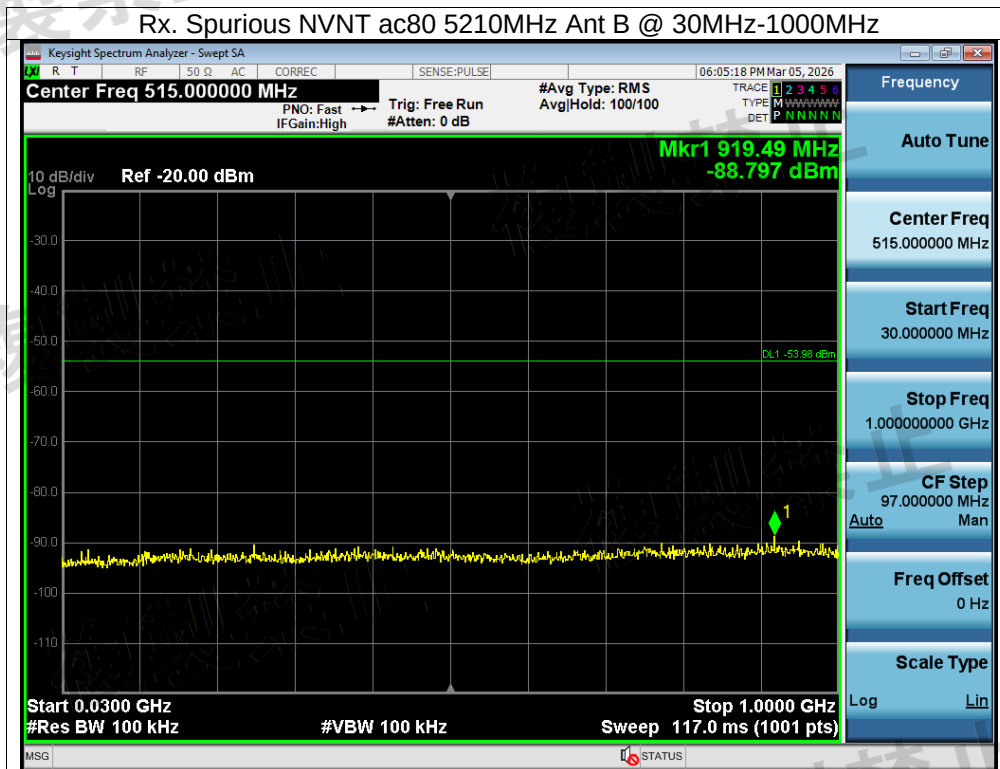


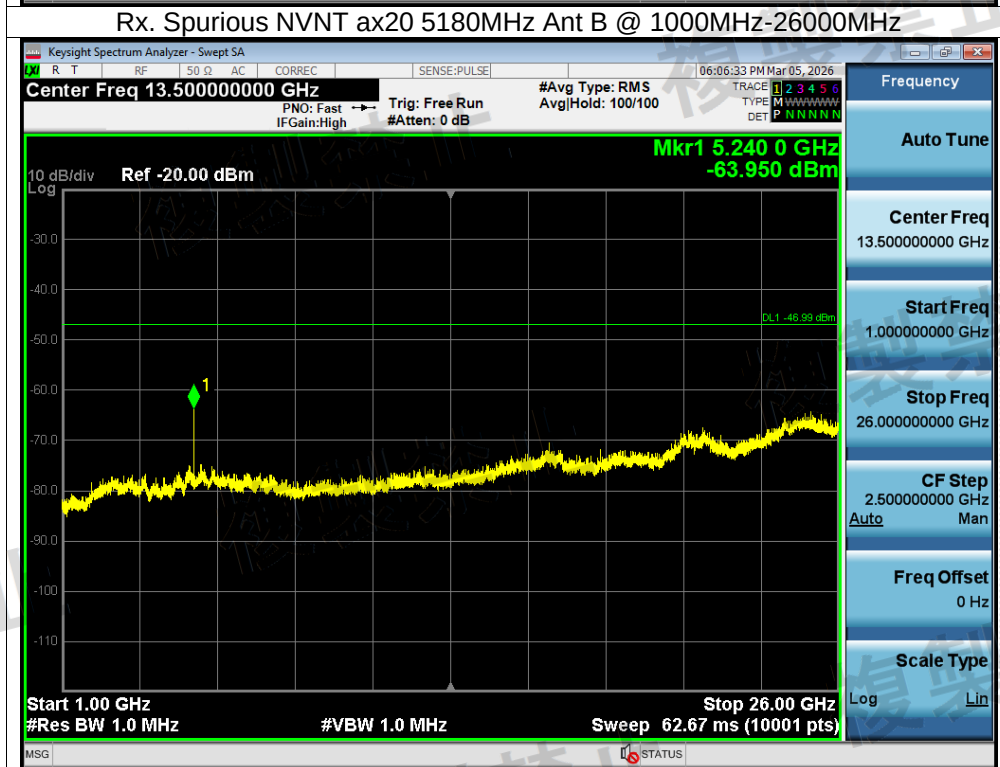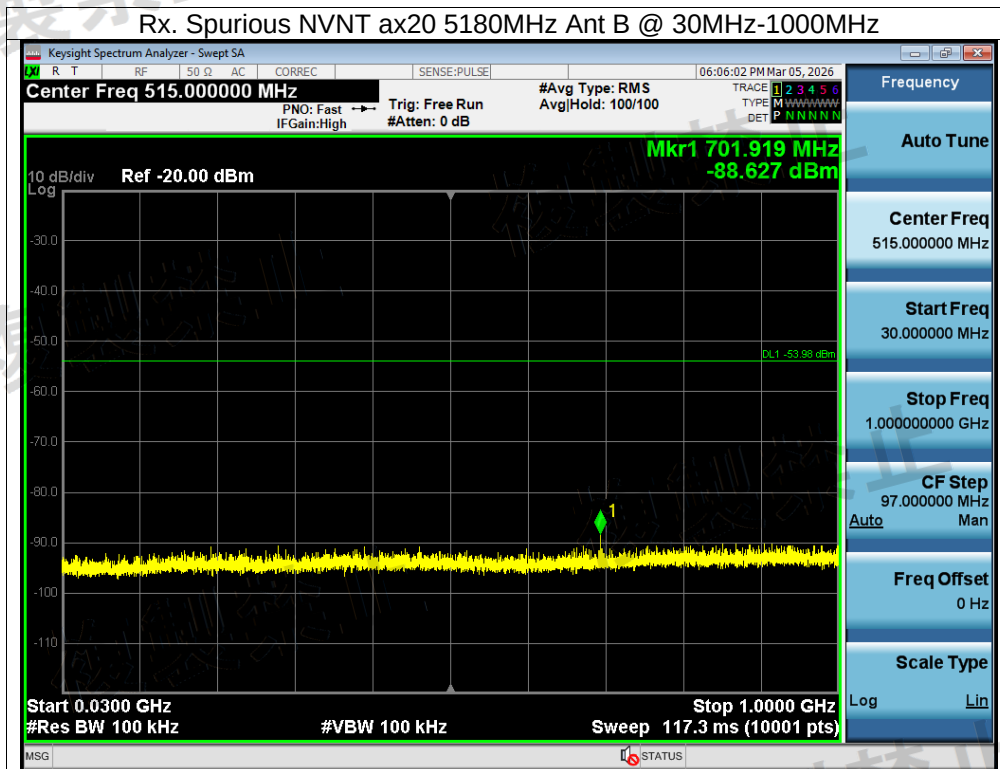


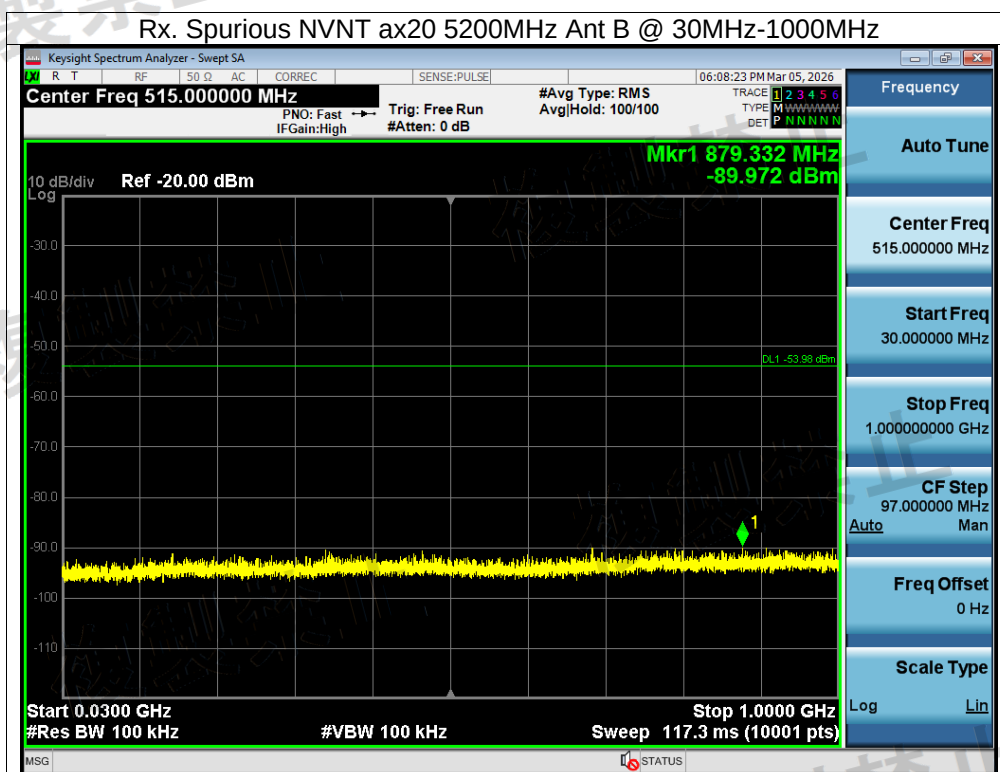

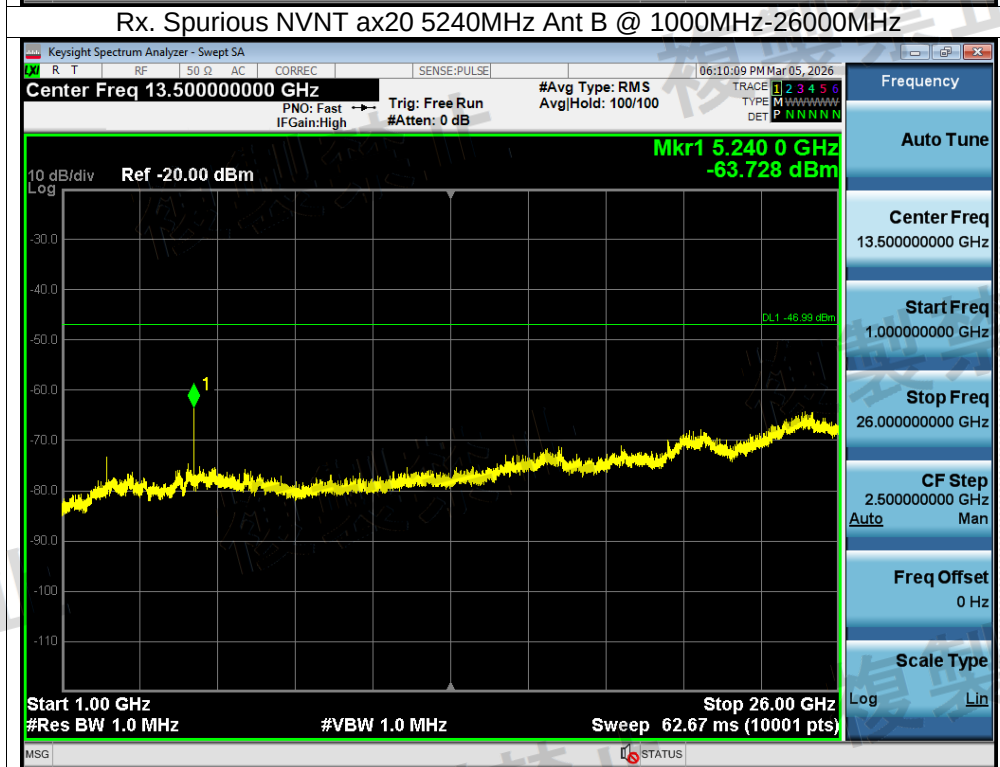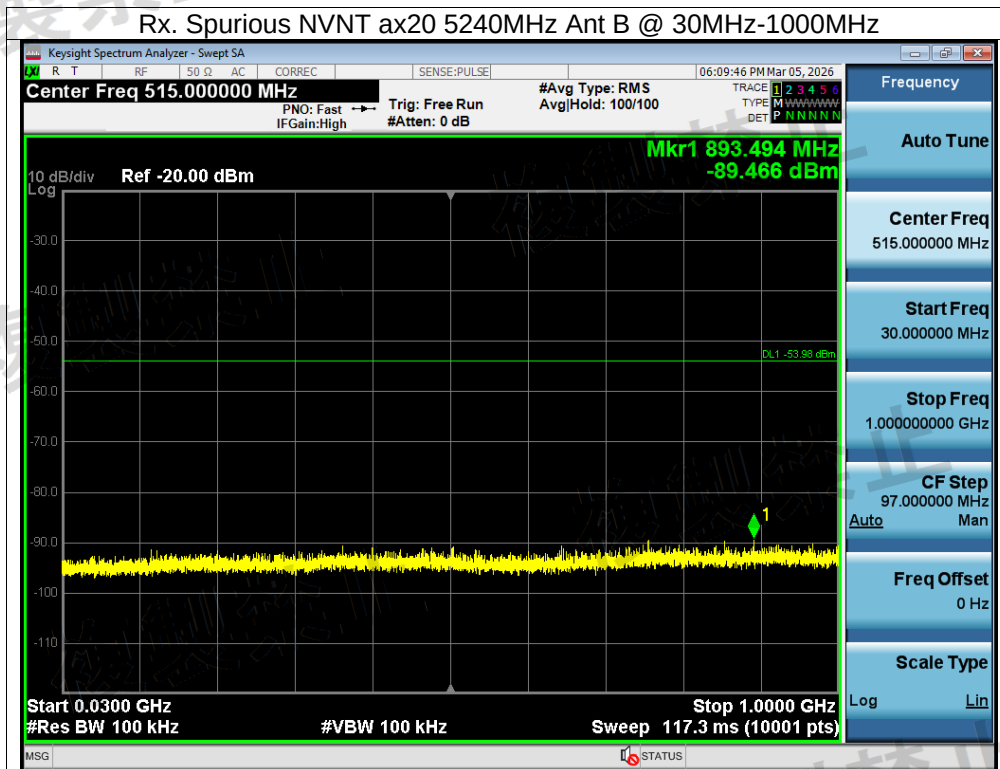

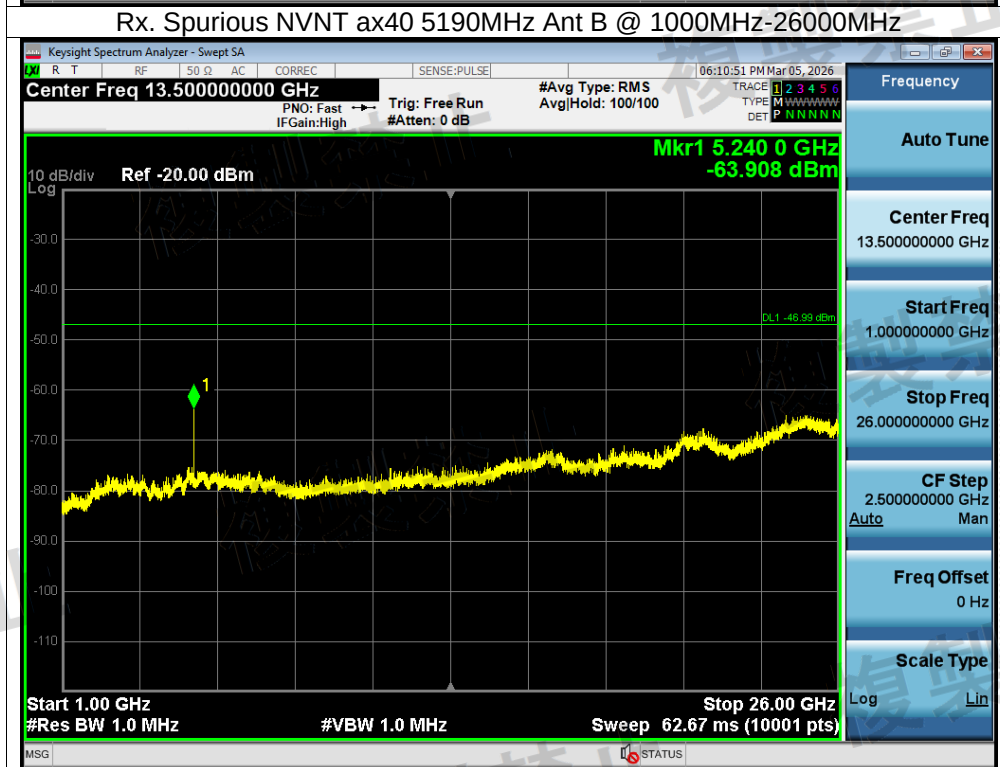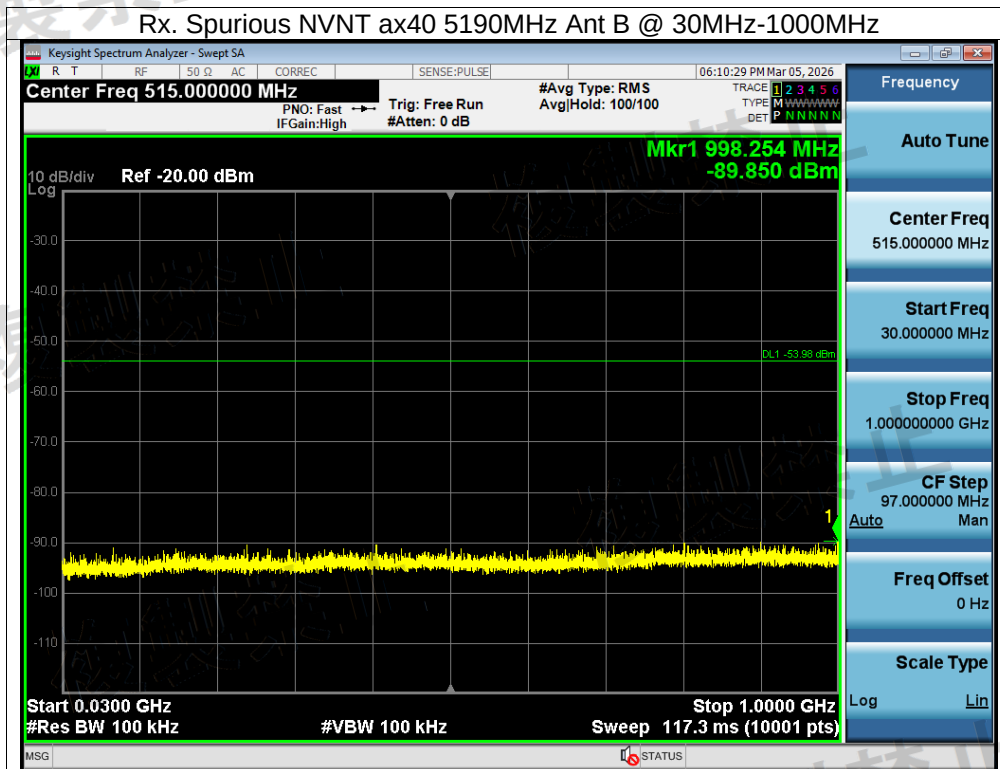


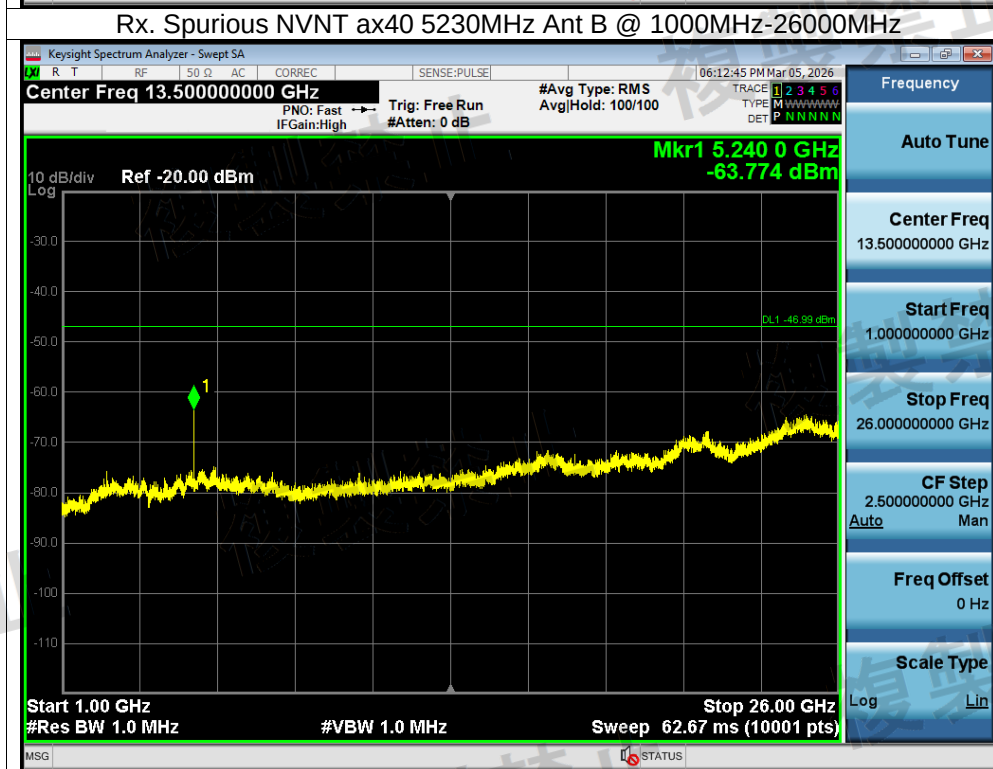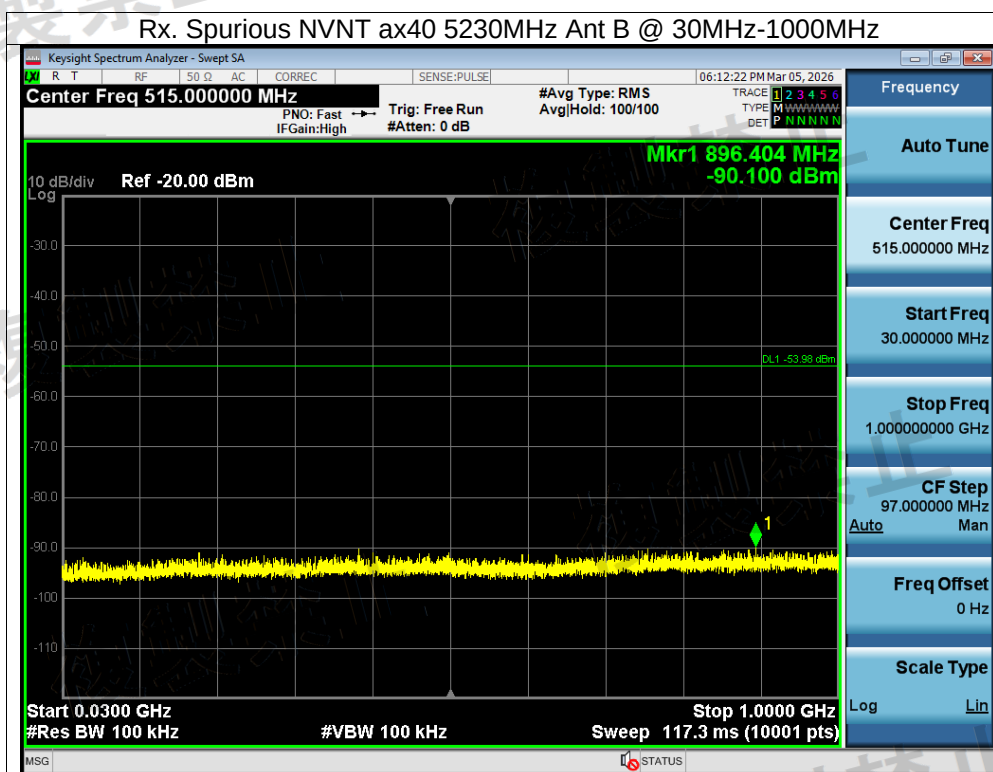

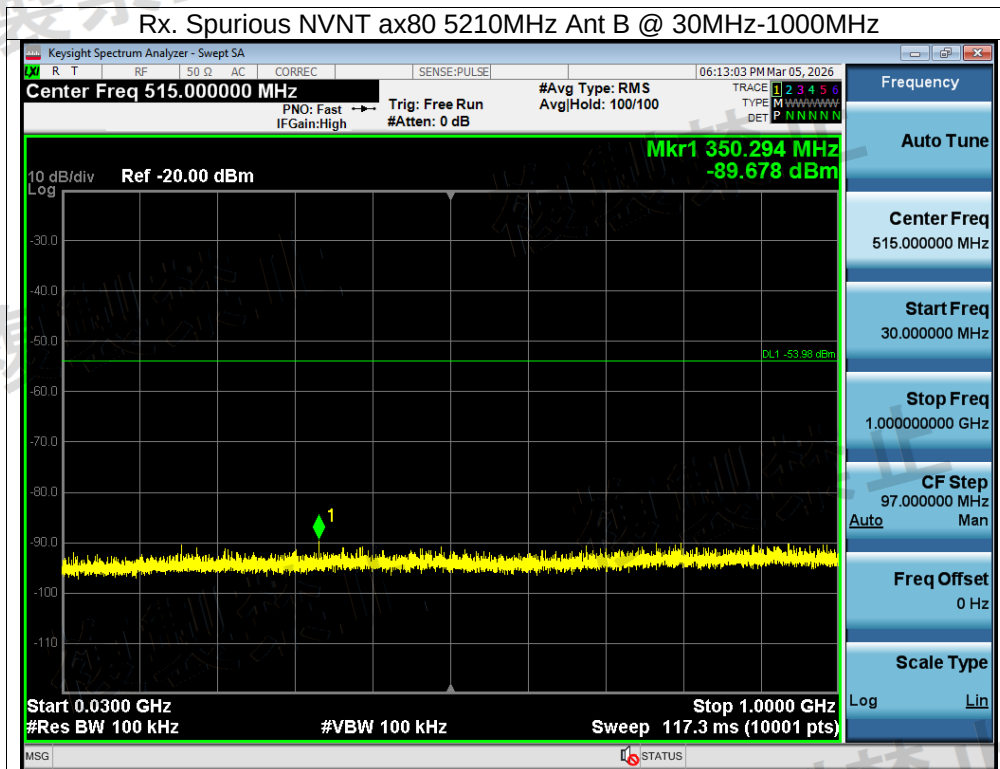


Test Graphs

Rx. Spurious NVNT n20 5180MHz MIMO @ 30MHz-1000MHz

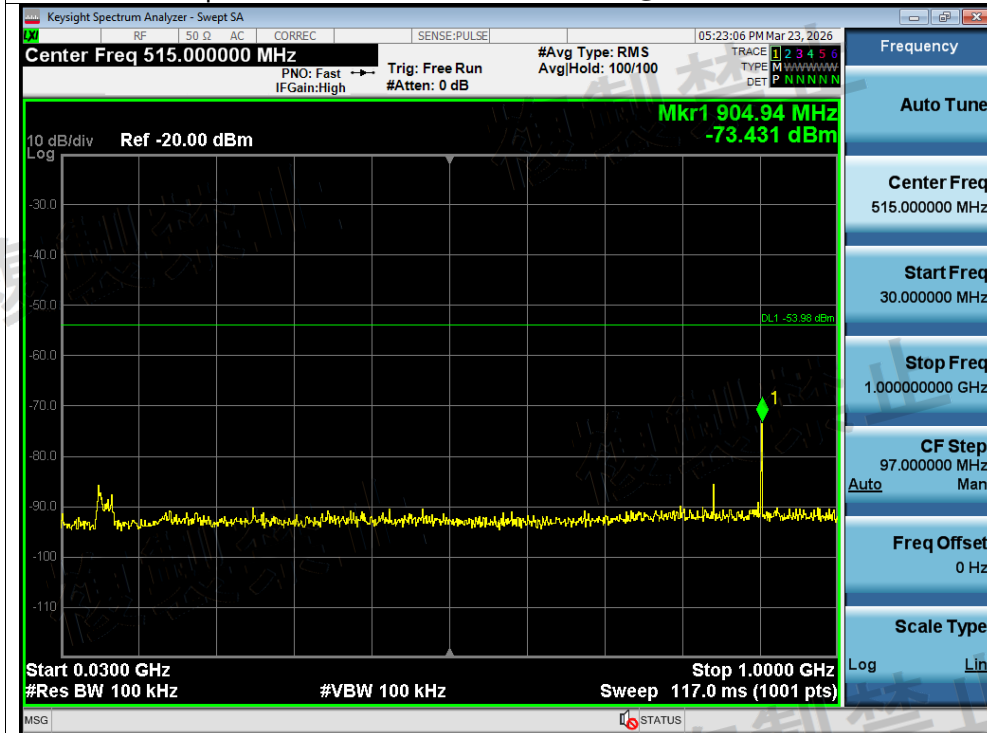


Rx. Spurious NVNT n20 5180MHz MIMO @ 1000MHz-26000MHz




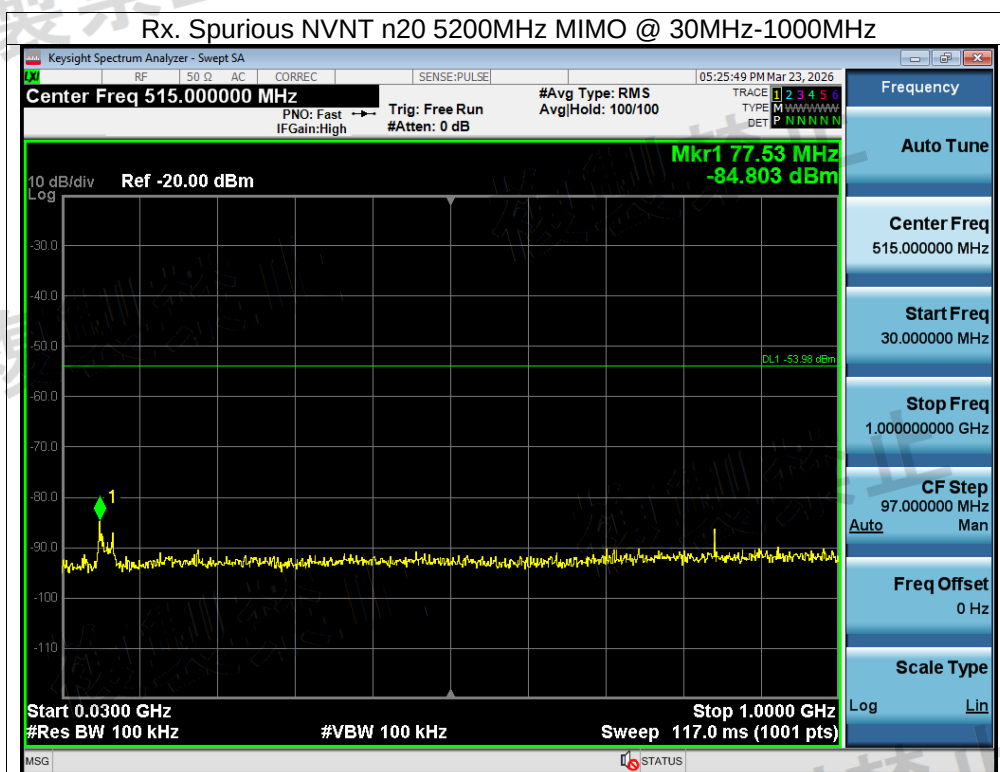



Rx. Spurious NVNT n20 5240MHz MIMO @ 30MHz-1000MHz


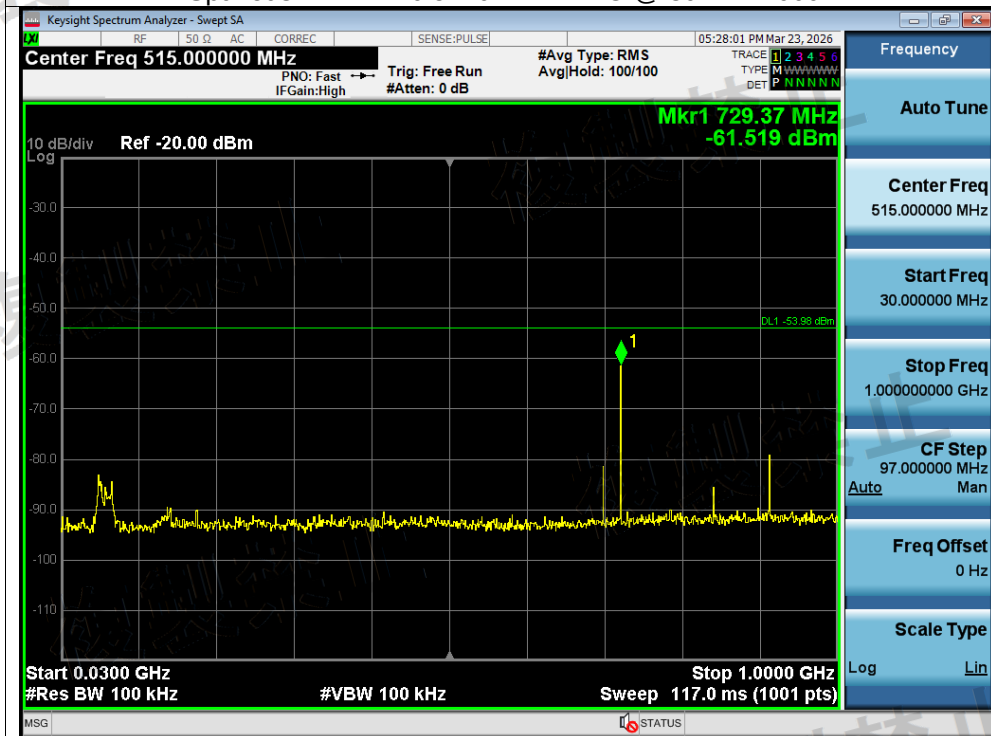




Rx. Spurious NVNT n20 5240MHz MIMO @ 30MHz-1000MHz Final

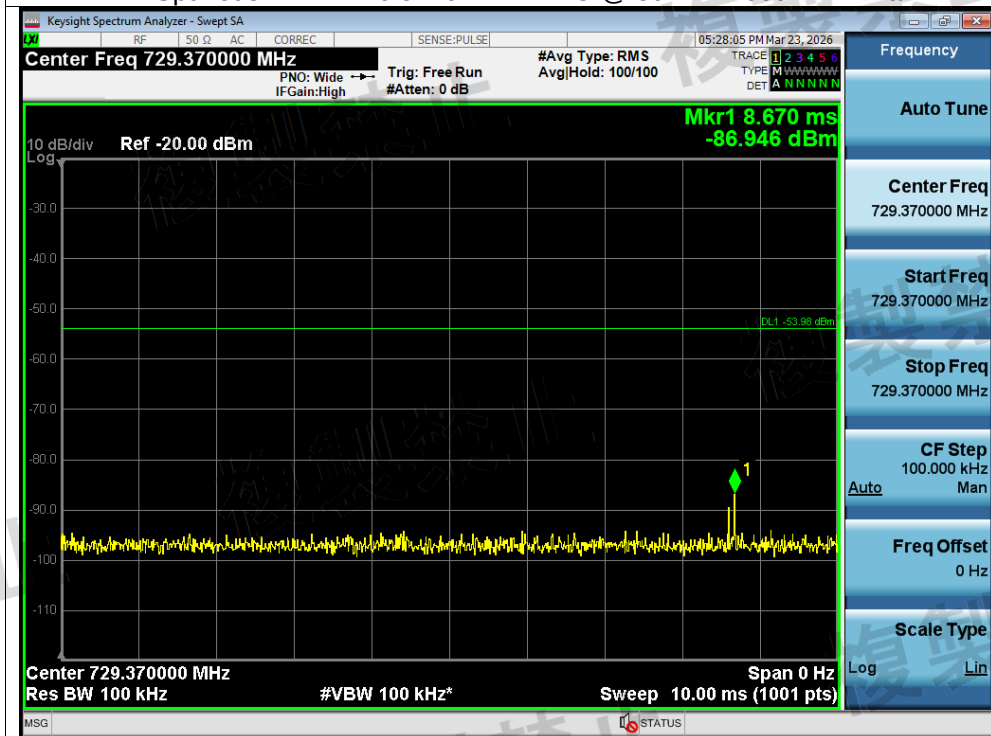


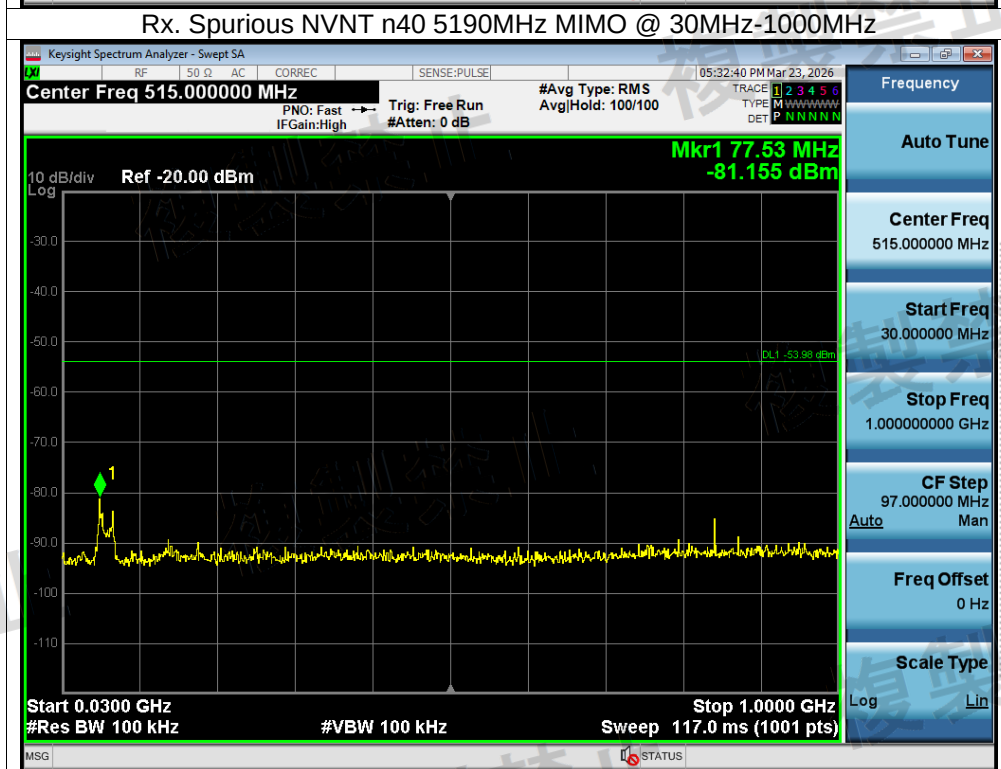



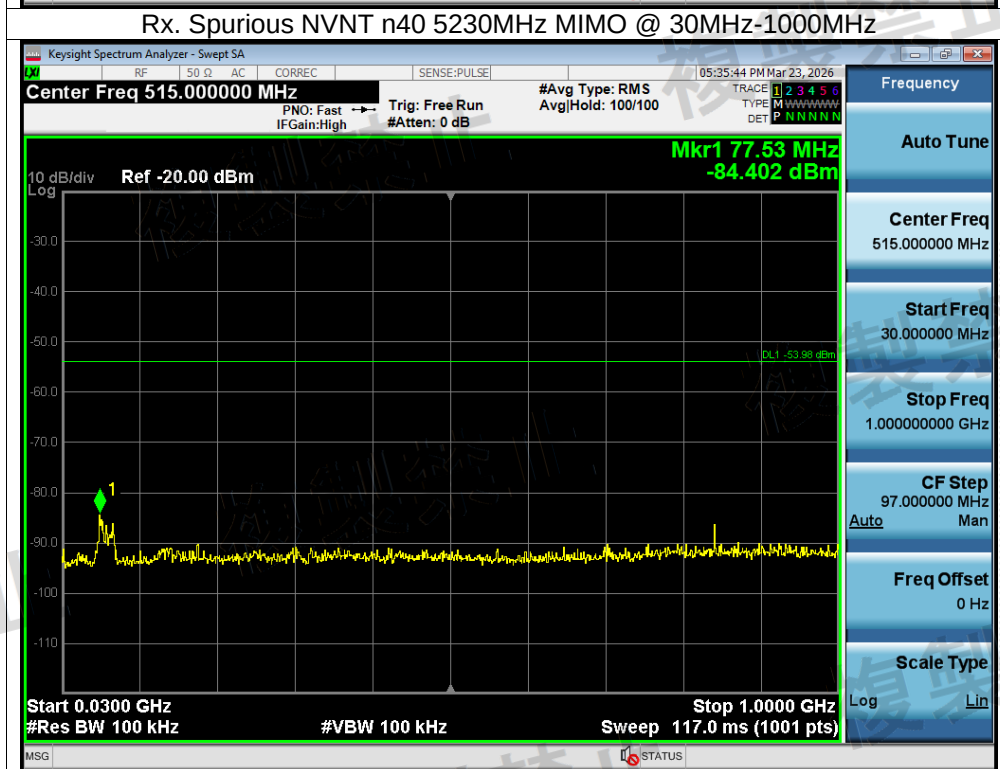


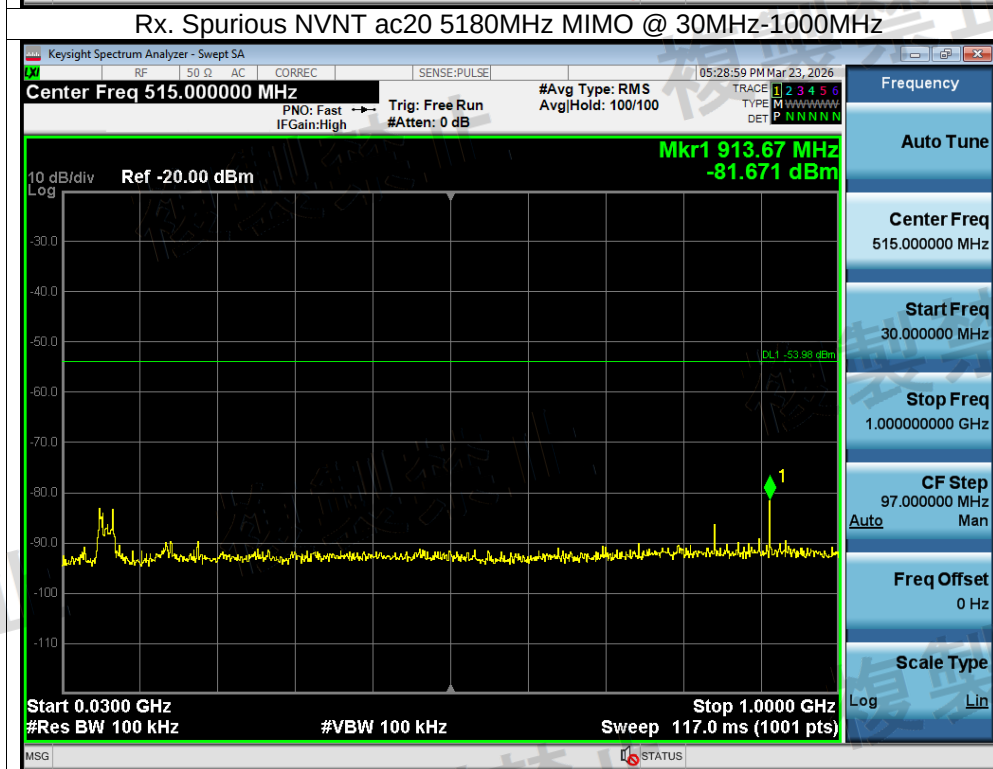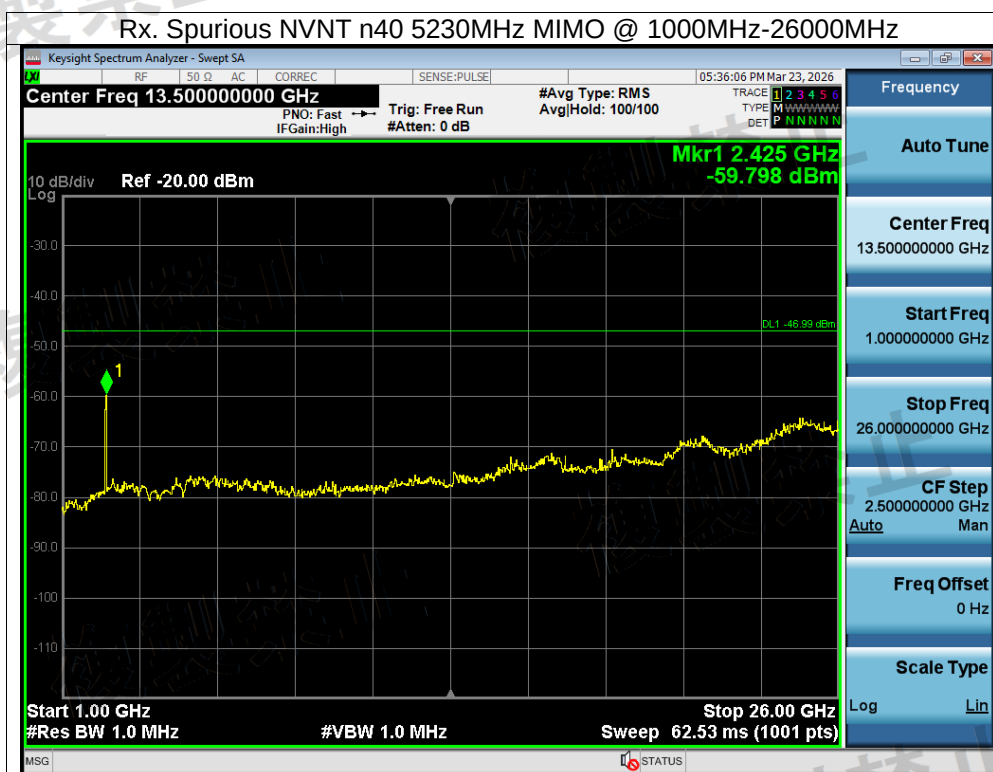


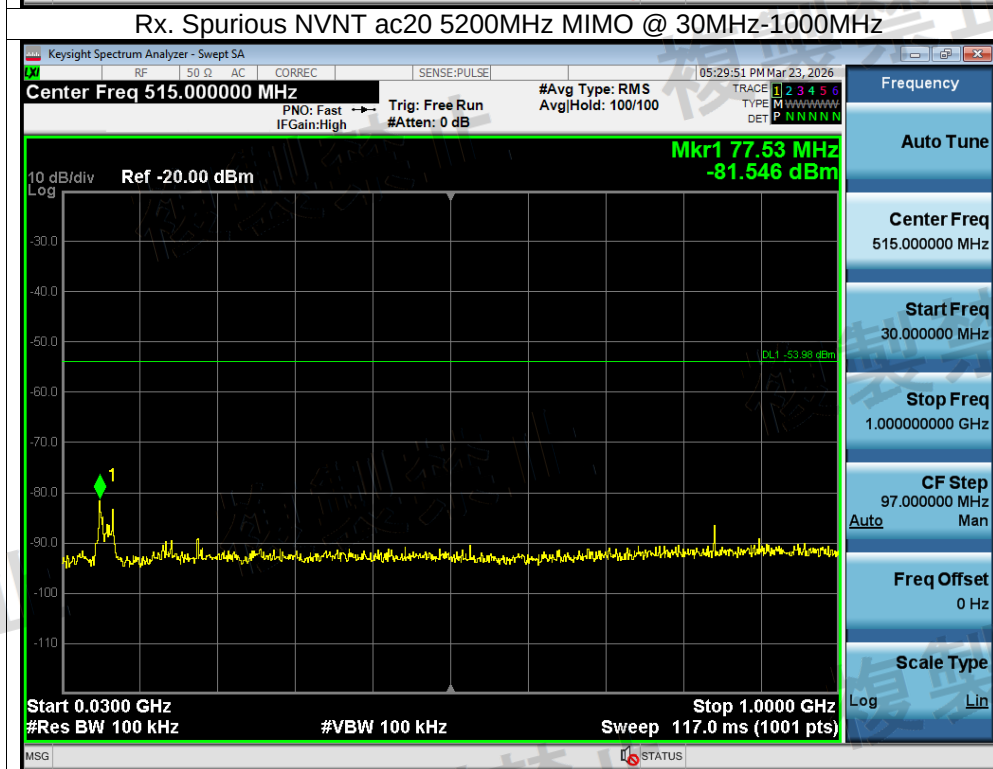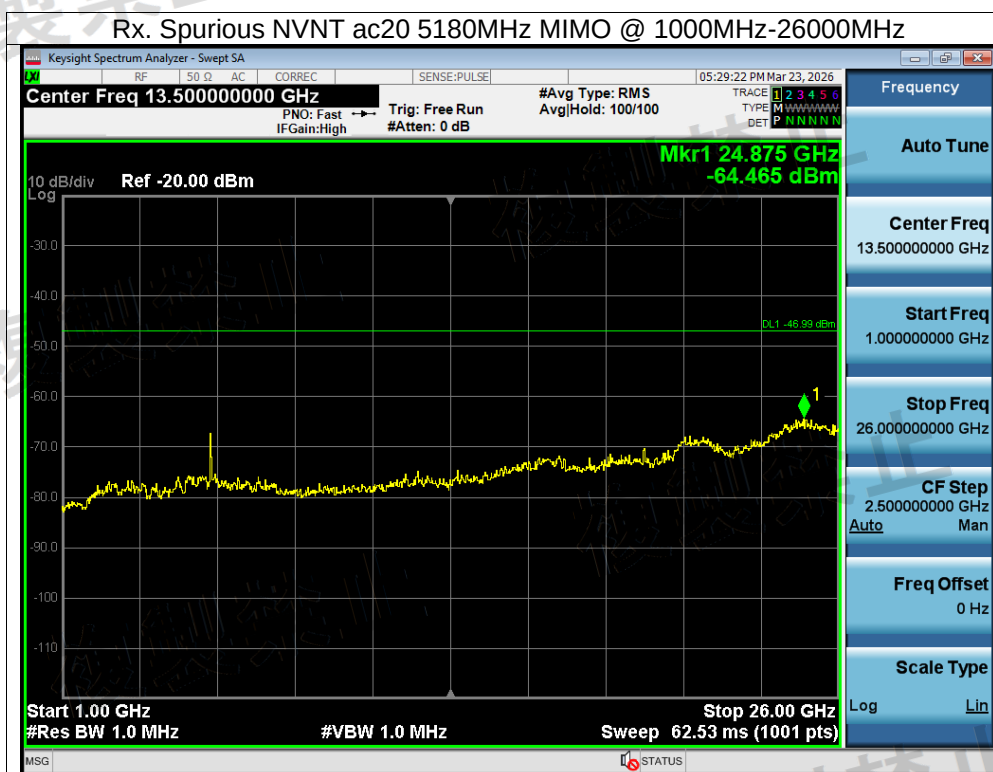



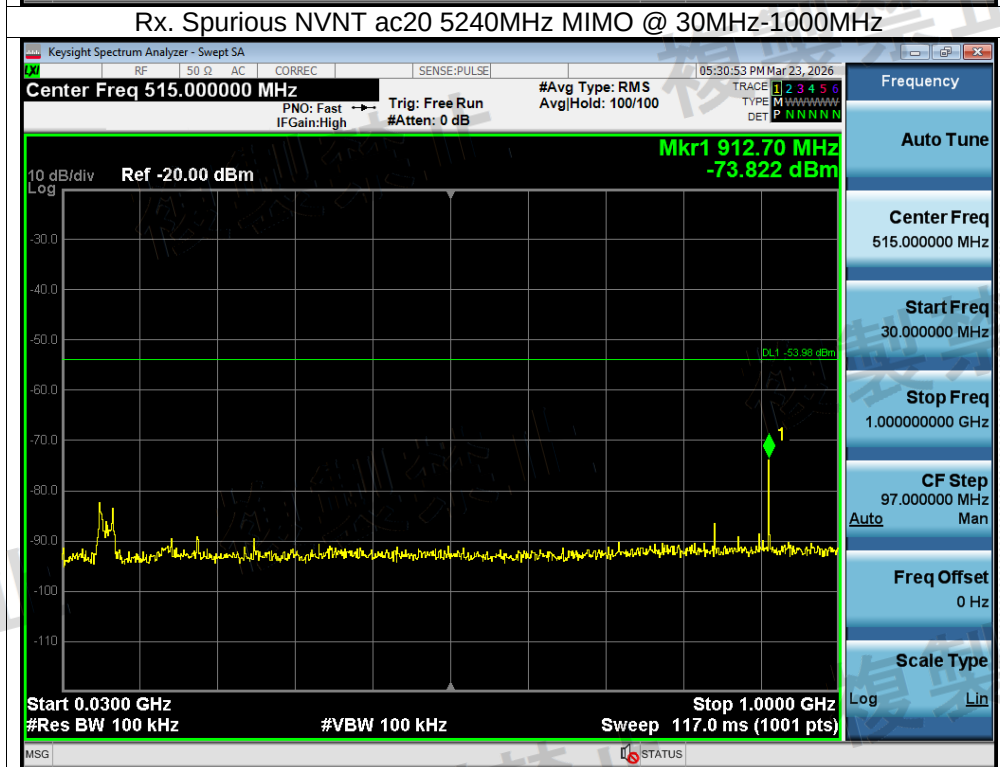


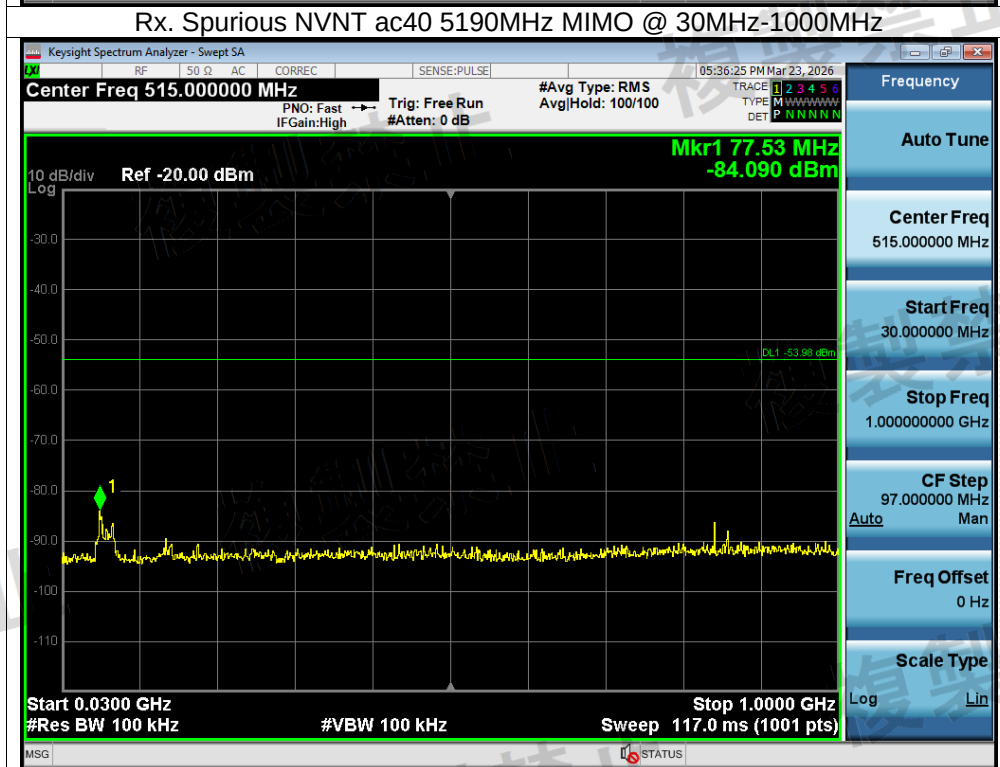


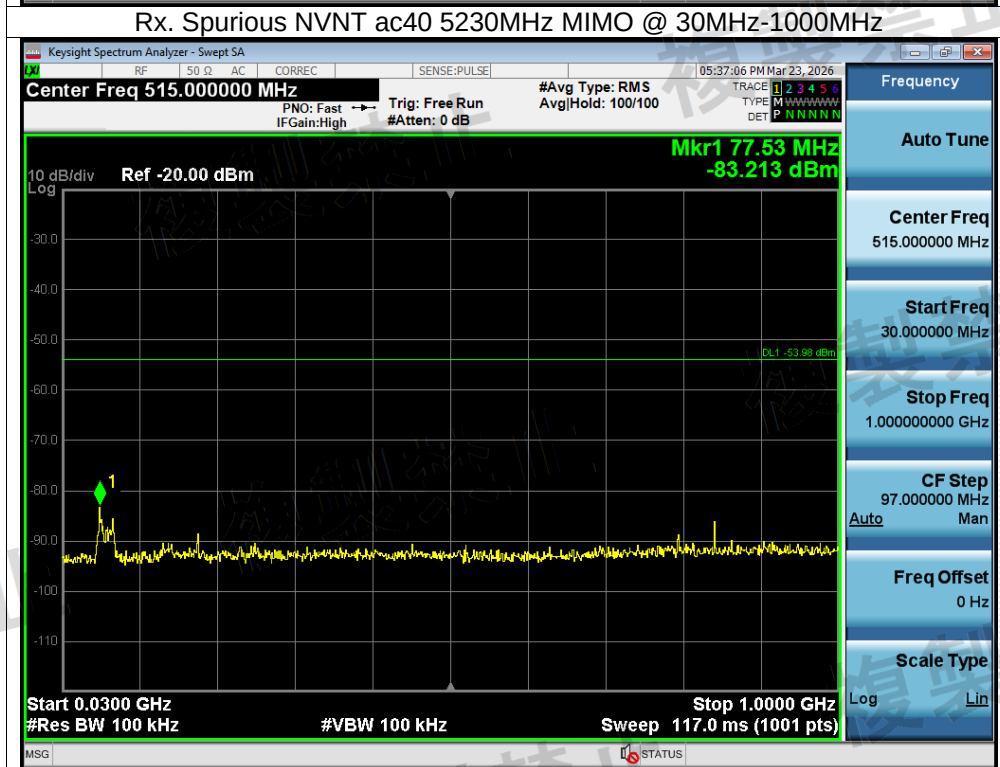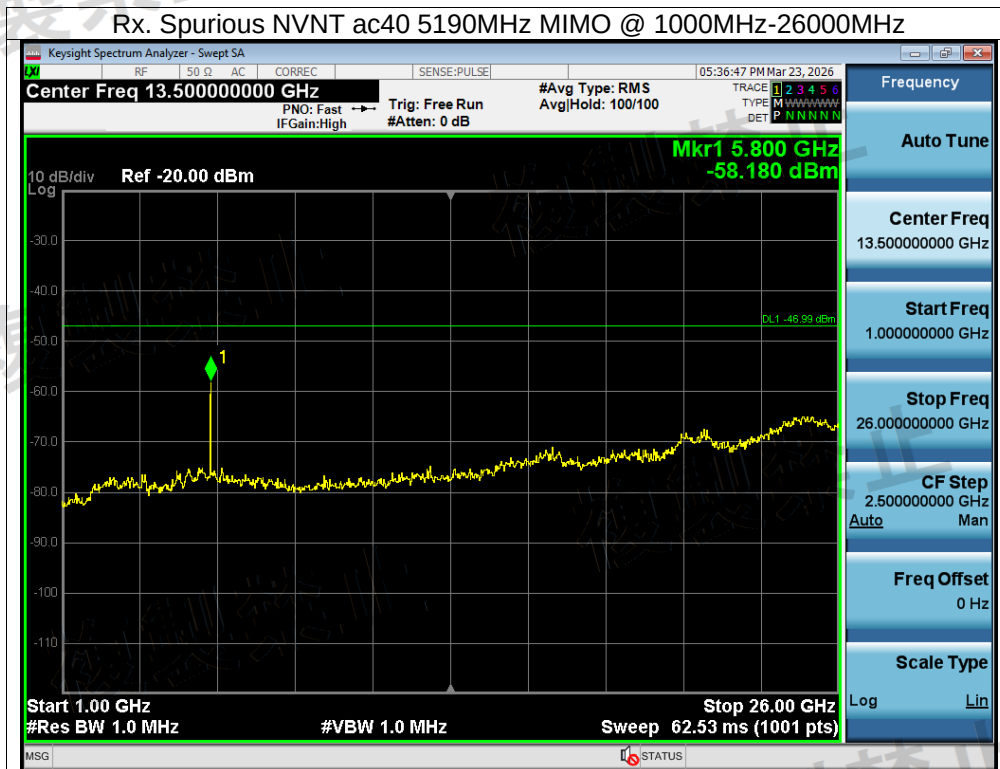


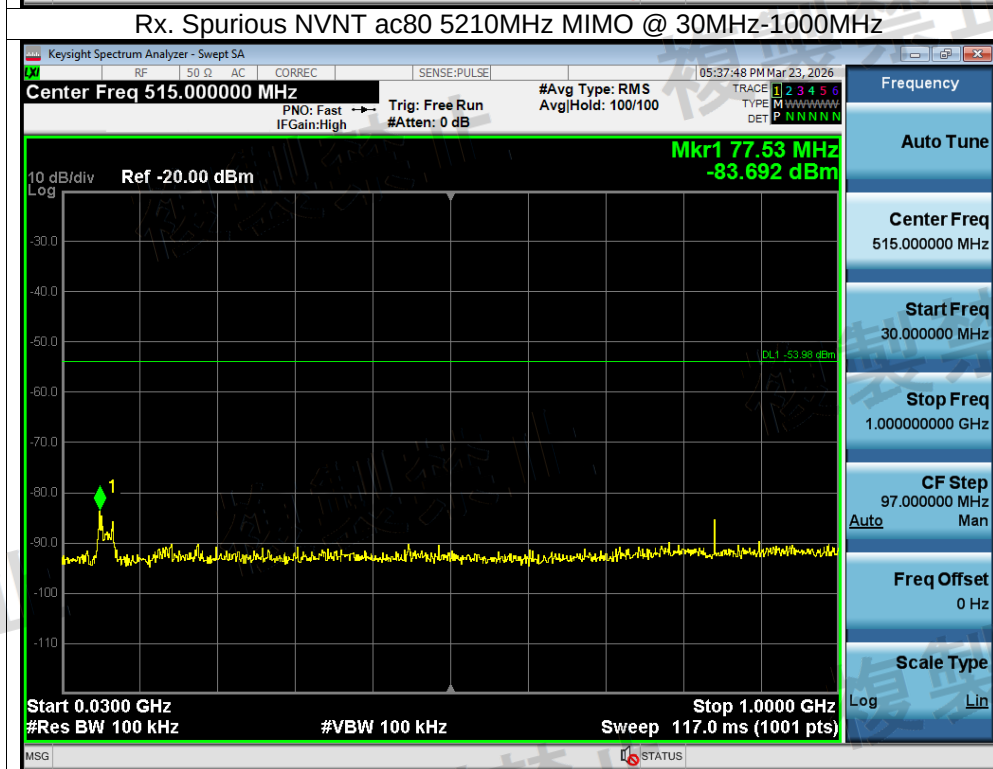

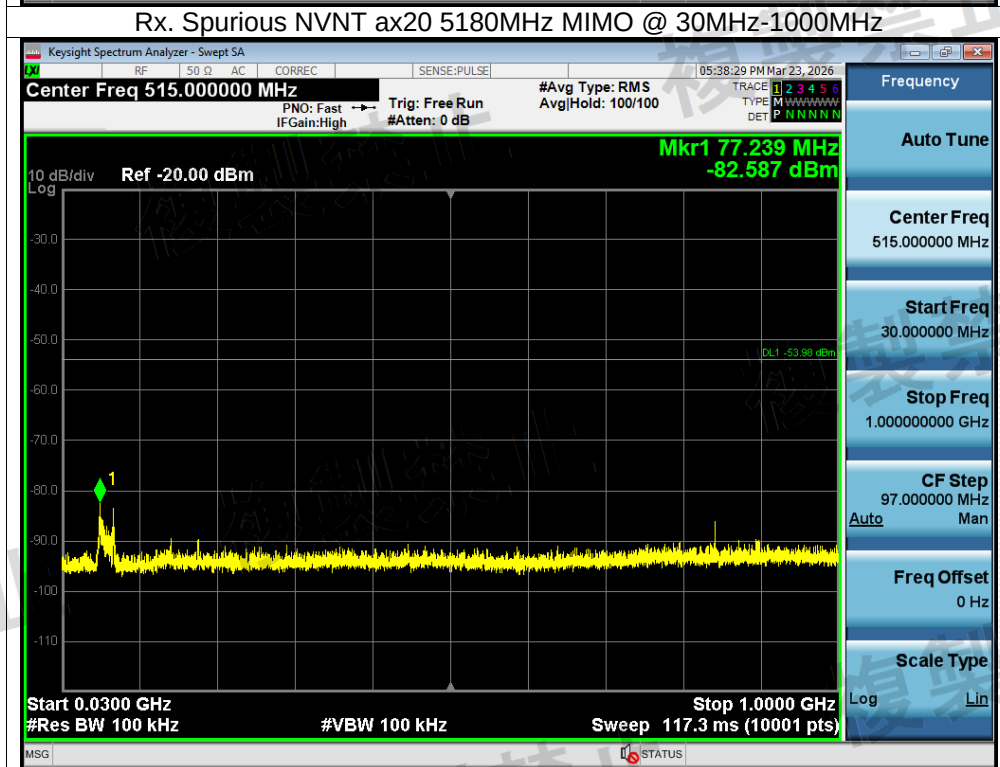


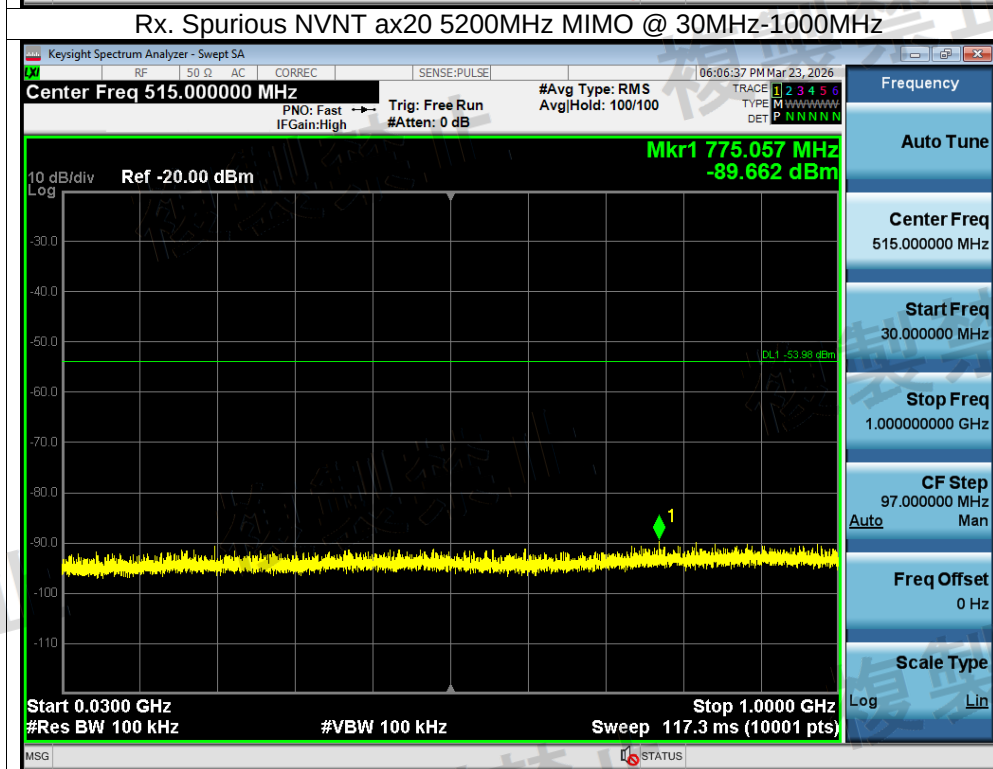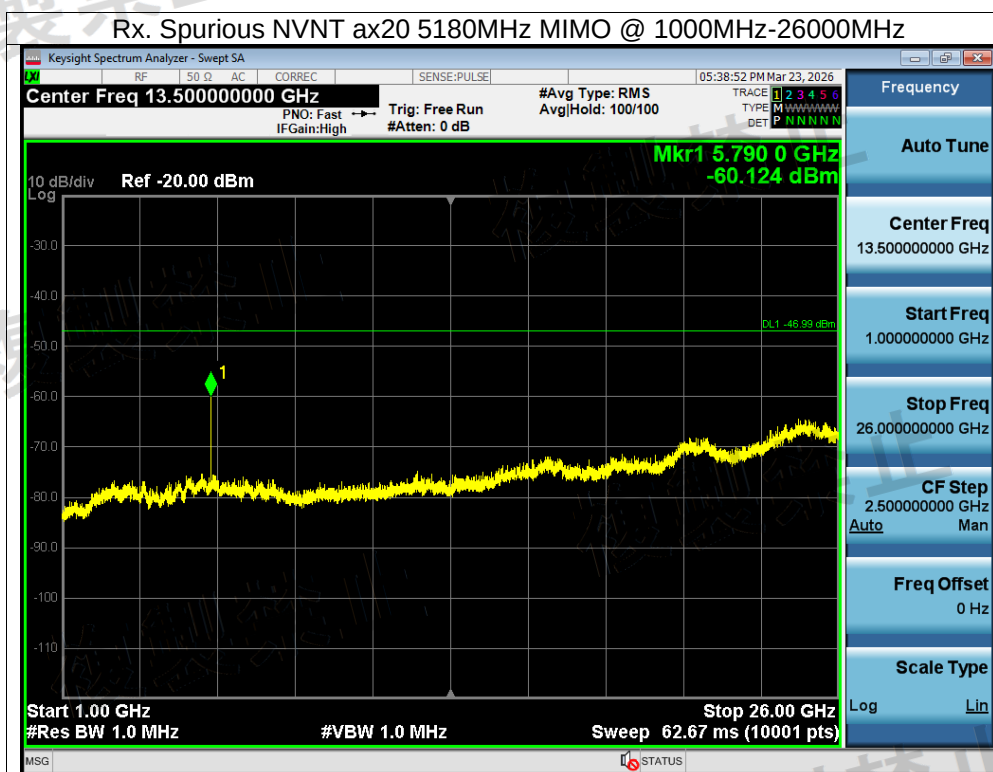


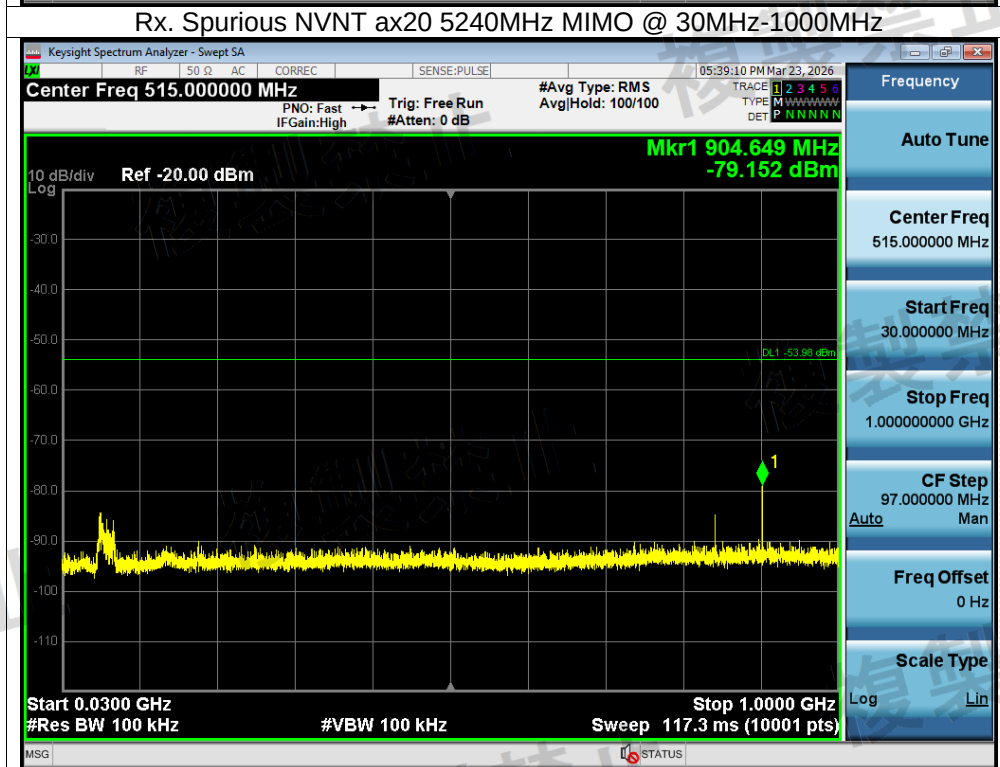

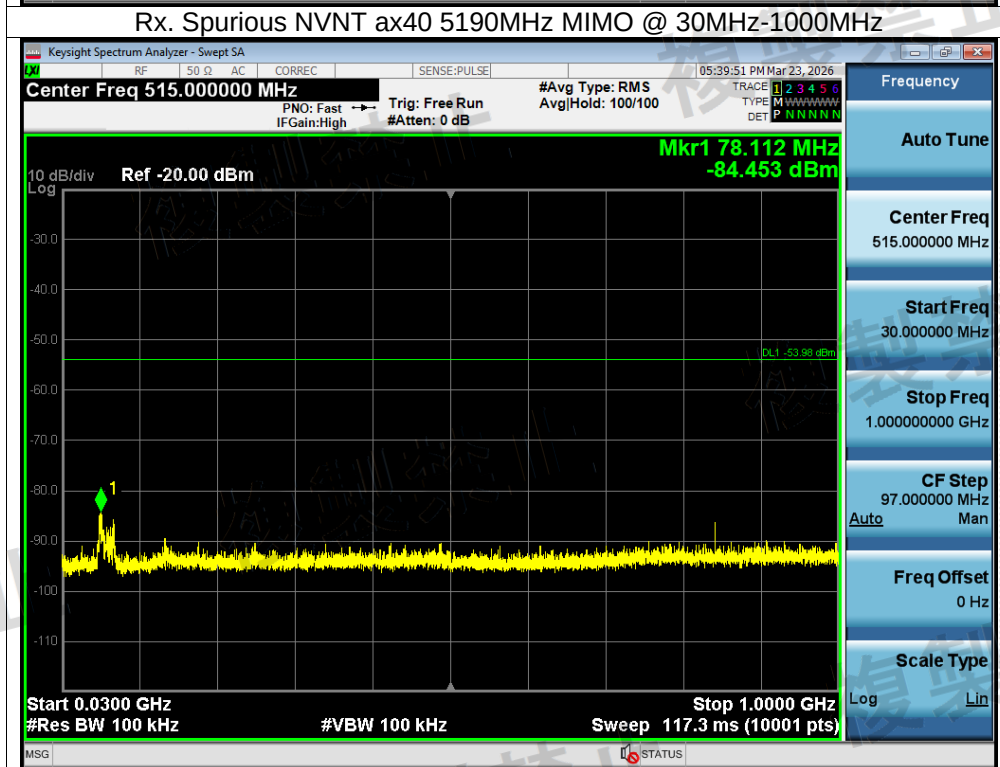




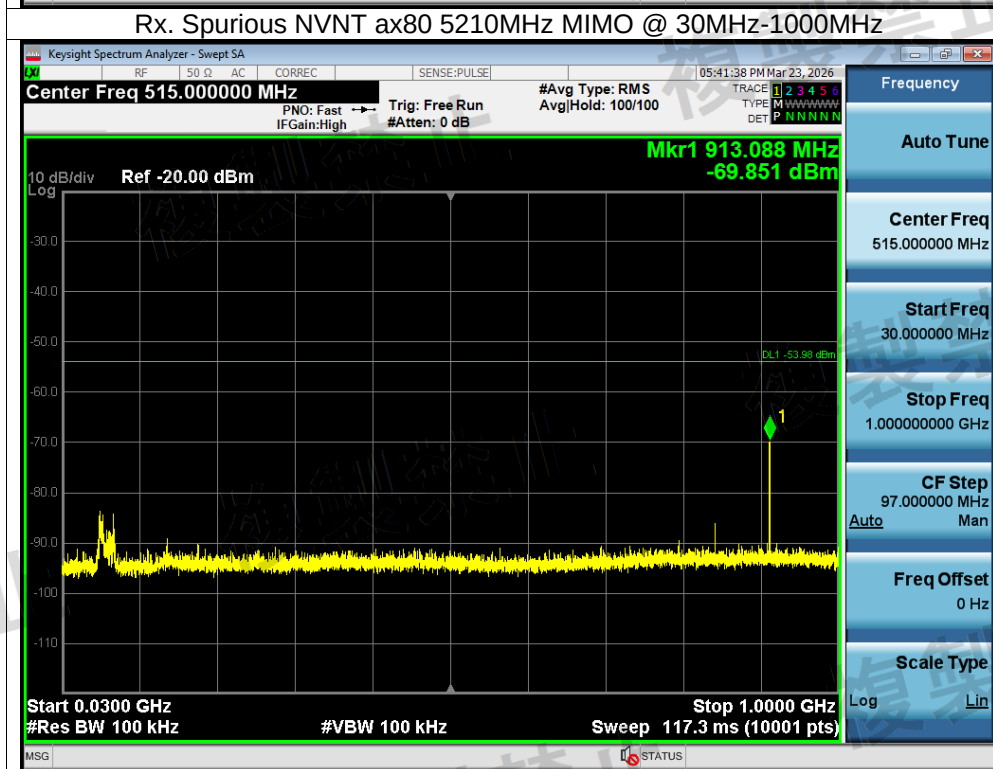

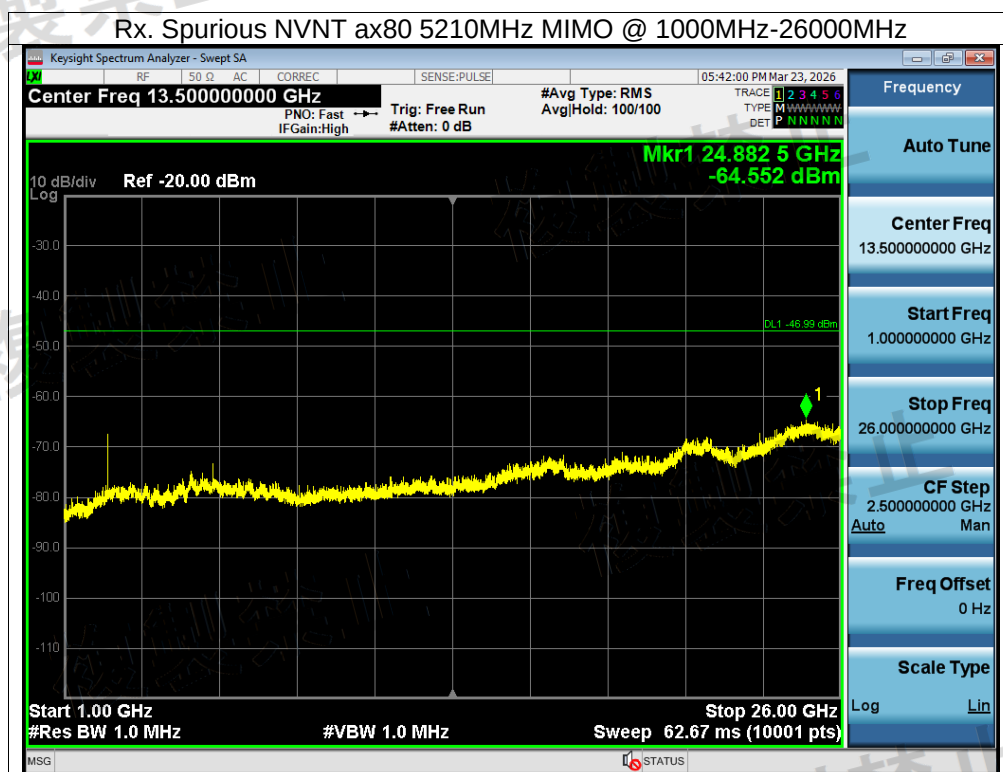

12. Transmitter Burst Length Measurement

12.1 Block Diagram Of Test Setup

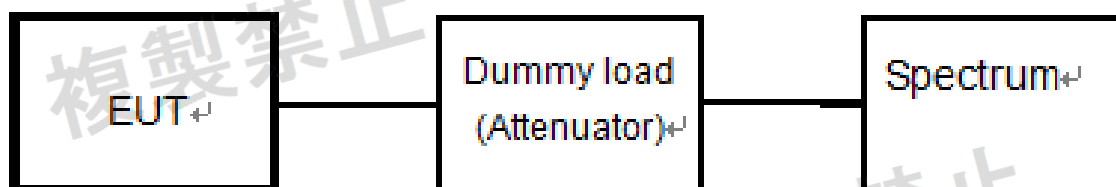

12.2 Limit

Item	Limits
Transmitter Burst Length	≤8msecond

12.3 Measuring Instruments And Setting

Please refer to section 5 in this report. The following table is the setting of Spectrum Analyzer.

Spectrum Parameter	Setting
Center frequency	Test frequency
Sweep bandwidth	0Hz
Resoluble bandwidth	1MHz
Video bandwidth	equivalent to resolvable bandwidth
Sweep Time	Minimum time to assure measuring accuracy
Y-axis scale	10dB/Div.
Detection mode	Positive peak
Trigger condition	Rising up of level

12.4 Test Result

Temperature:	25°C		
Humidity:	55 % RH	Test Voltage	DC 14.4V

Antenna A:


Condition	Mode	Frequency (MHz)	Burst Length (ms)	Limit (ms)	Verdict
NVNT	a	5180	2.73	8	Pass
NVNT	a	5200	2.729	8	Pass
NVNT	a	5240	2.729	8	Pass
NVNT	n20	5180	1.29	8	Pass
NVNT	n20	5200	1.291	8	Pass
NVNT	n20	5240	1.29	8	Pass
NVNT	n40	5190	1.241	8	Pass
NVNT	n40	5230	1.241	8	Pass
NVNT	ac20	5180	2.55	8	Pass
NVNT	ac20	5200	2.55	8	Pass
NVNT	ac20	5240	2.551	8	Pass
NVNT	ac40	5190	1.25	8	Pass
NVNT	ac40	5230	1.25	8	Pass
NVNT	ac80	5210	0.085	8	Pass
NVNT	ax20	5180	1.952	8	Pass
NVNT	ax20	5200	1.953	8	Pass
NVNT	ax20	5240	1.952	8	Pass
NVNT	ax40	5190	1.008	8	Pass
NVNT	ax40	5230	1.009	8	Pass
NVNT	ax80	5210	0.6	8	Pass

Antenna B:


Condition	Mode	Frequency (MHz)	Burst Length (ms)	Limit (ms)	Verdict
NVNT	a	5180	2.729	8	Pass
NVNT	a	5200	2.729	8	Pass
NVNT	a	5240	2.729	8	Pass
NVNT	n20	5180	1.289	8	Pass
NVNT	n20	5200	1.289	8	Pass
NVNT	n20	5240	1.29	8	Pass
NVNT	n40	5190	1.241	8	Pass
NVNT	n40	5230	1.241	8	Pass
NVNT	ac20	5180	2.549	8	Pass
NVNT	ac20	5200	2.549	8	Pass
NVNT	ac20	5240	2.549	8	Pass
NVNT	ac40	5190	1.249	8	Pass
NVNT	ac40	5230	1.249	8	Pass
NVNT	ac80	5210	0.601	8	Pass
NVNT	ax20	5180	1.952	8	Pass
NVNT	ax20	5200	1.952	8	Pass
NVNT	ax20	5240	1.952	8	Pass
NVNT	ax40	5190	1.008	8	Pass
NVNT	ax40	5230	1.008	8	Pass
NVNT	ax80	5210	0.601	8	Pass



Test Graphs



Burst Length NVNT a 5180MHz Ant A


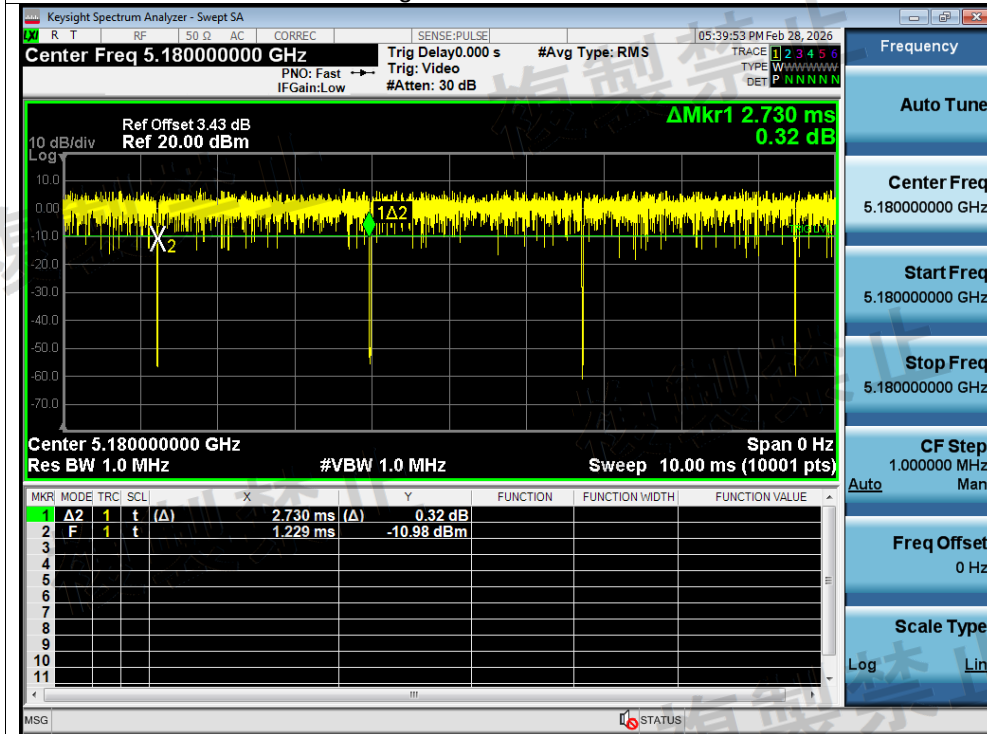




Burst Length NVNT a 5200MHz Ant A


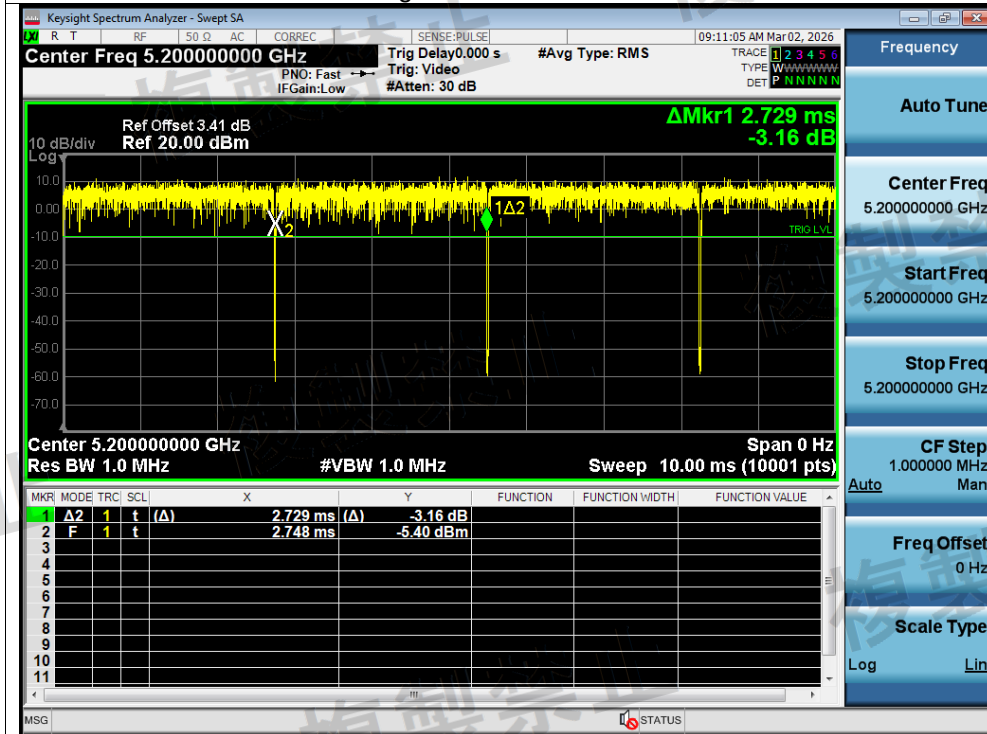


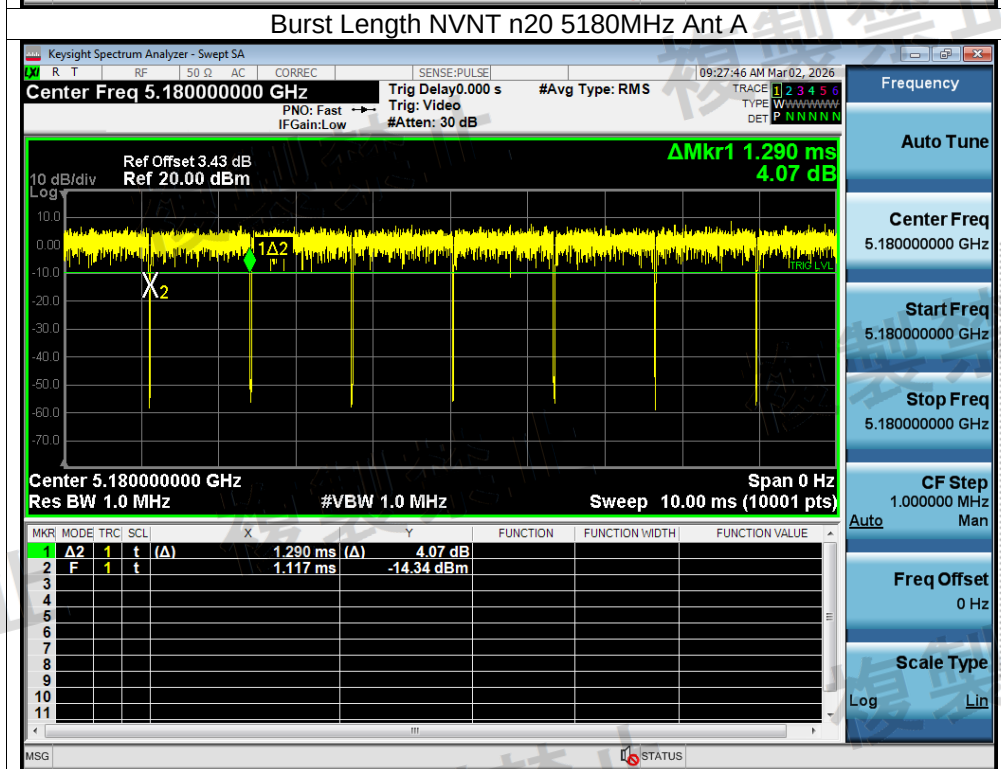
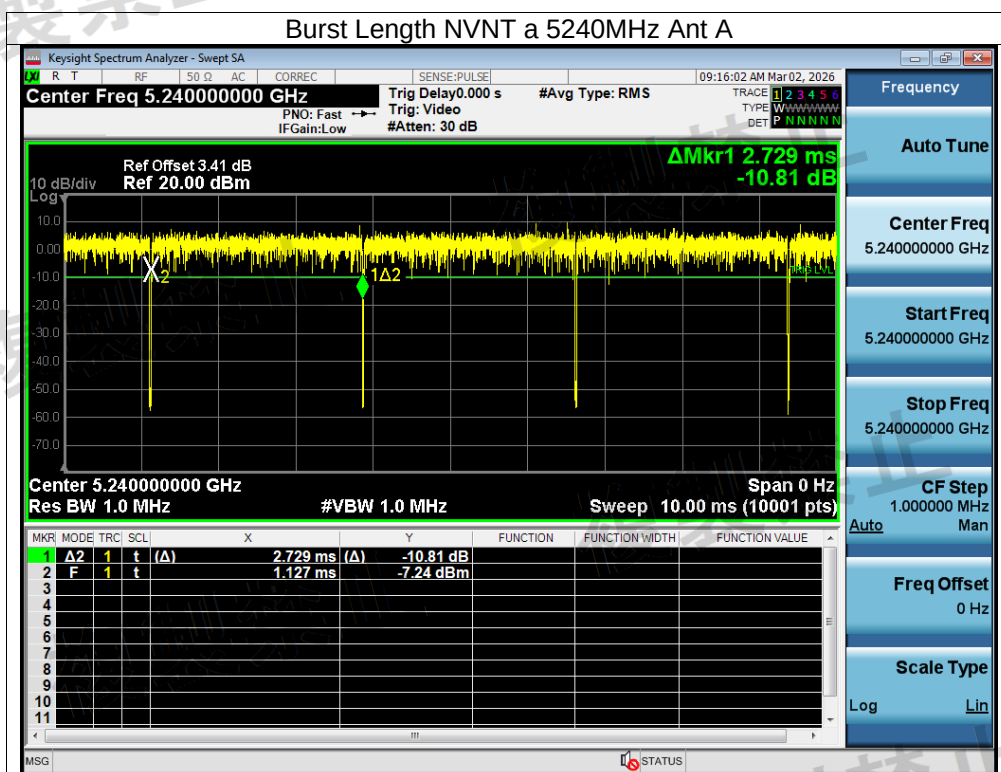


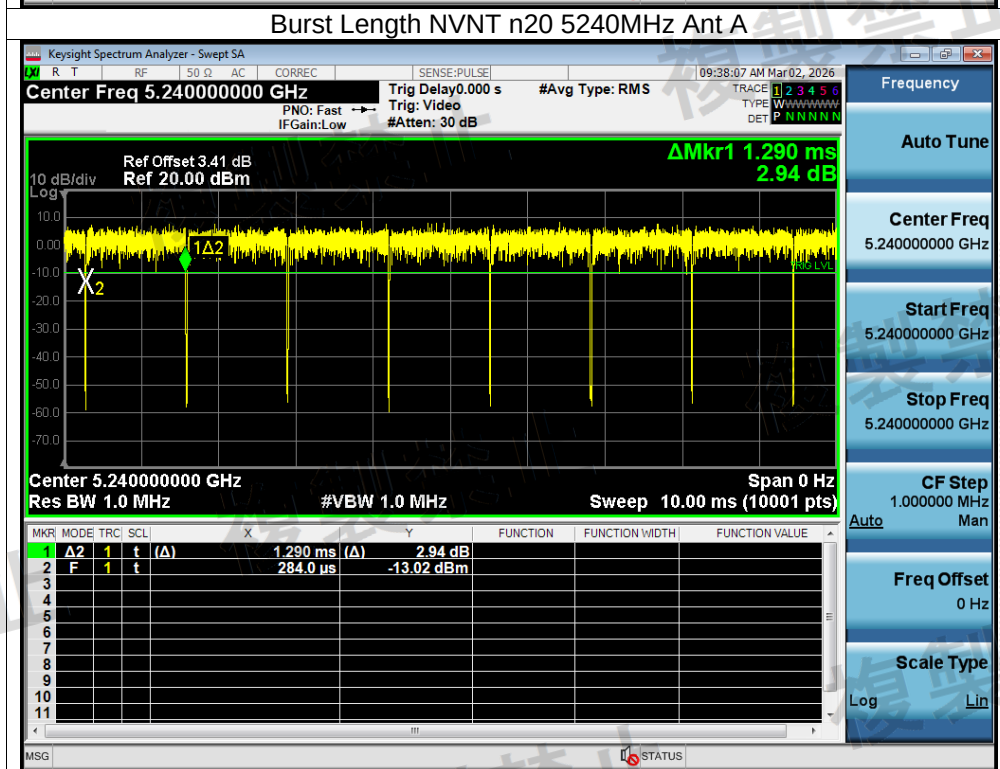
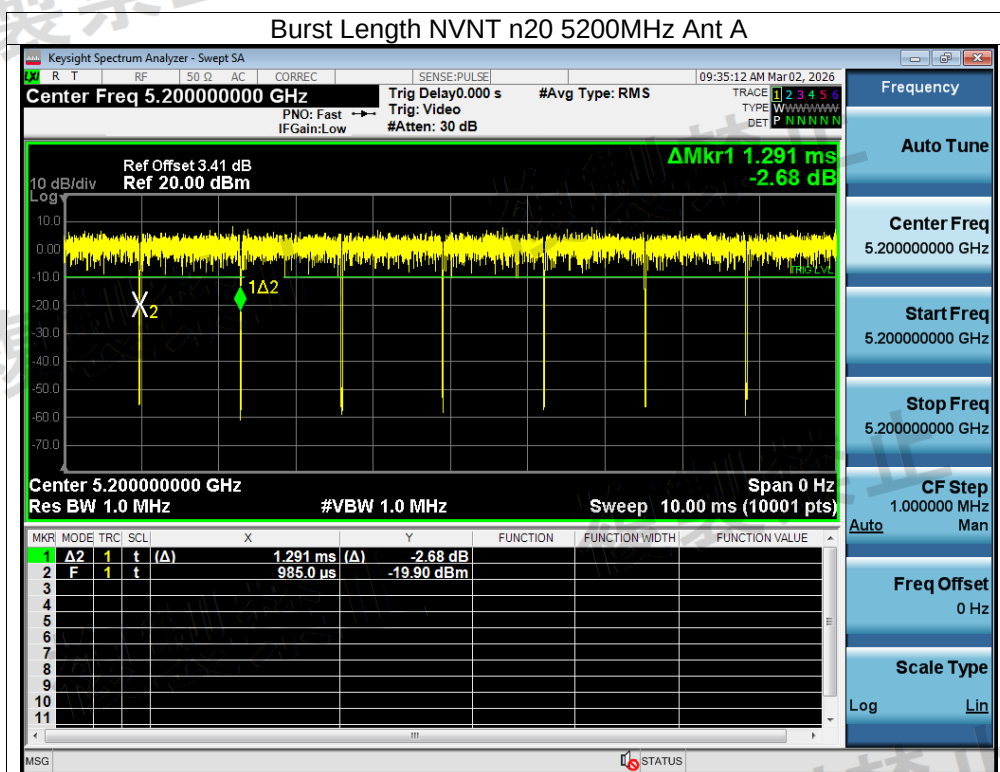


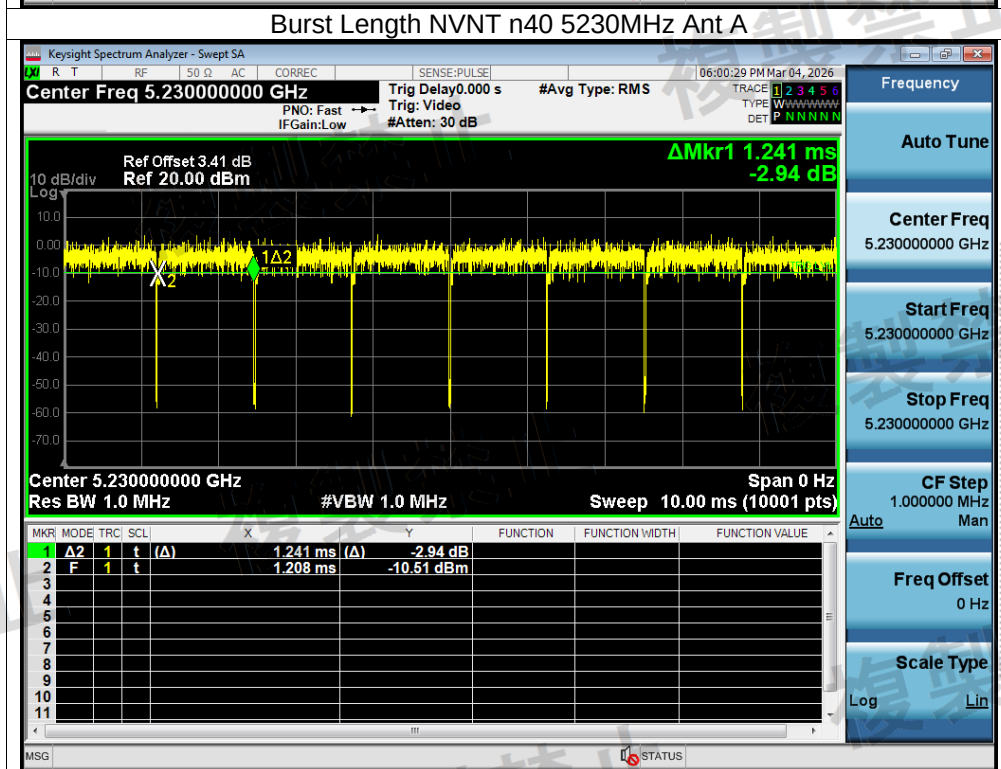
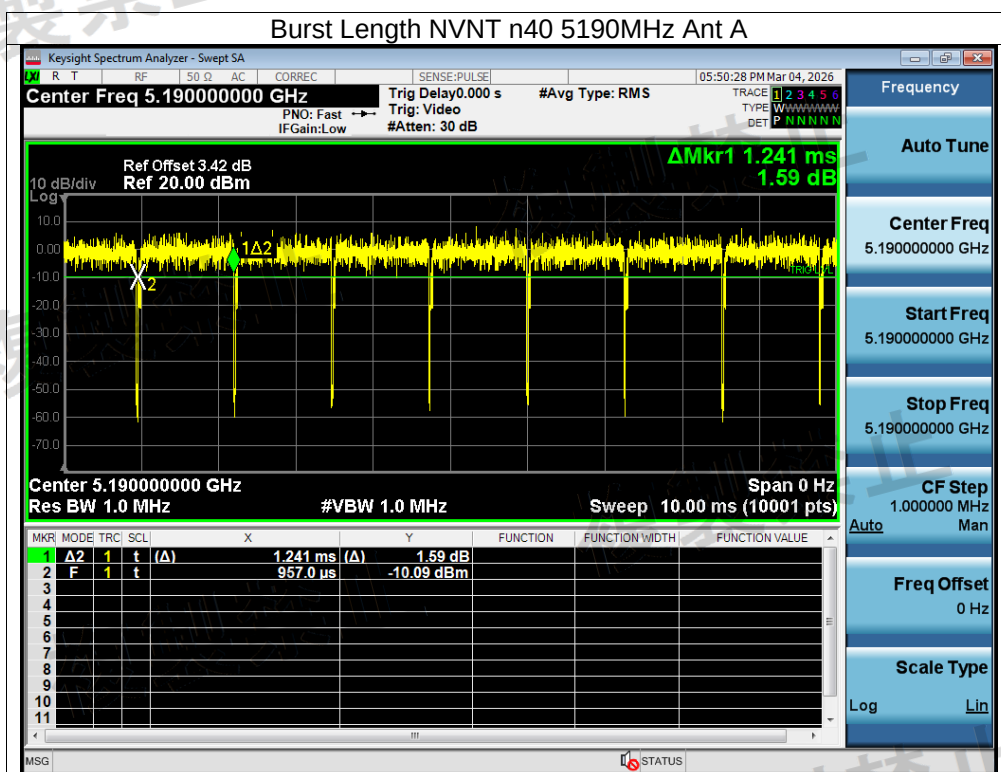


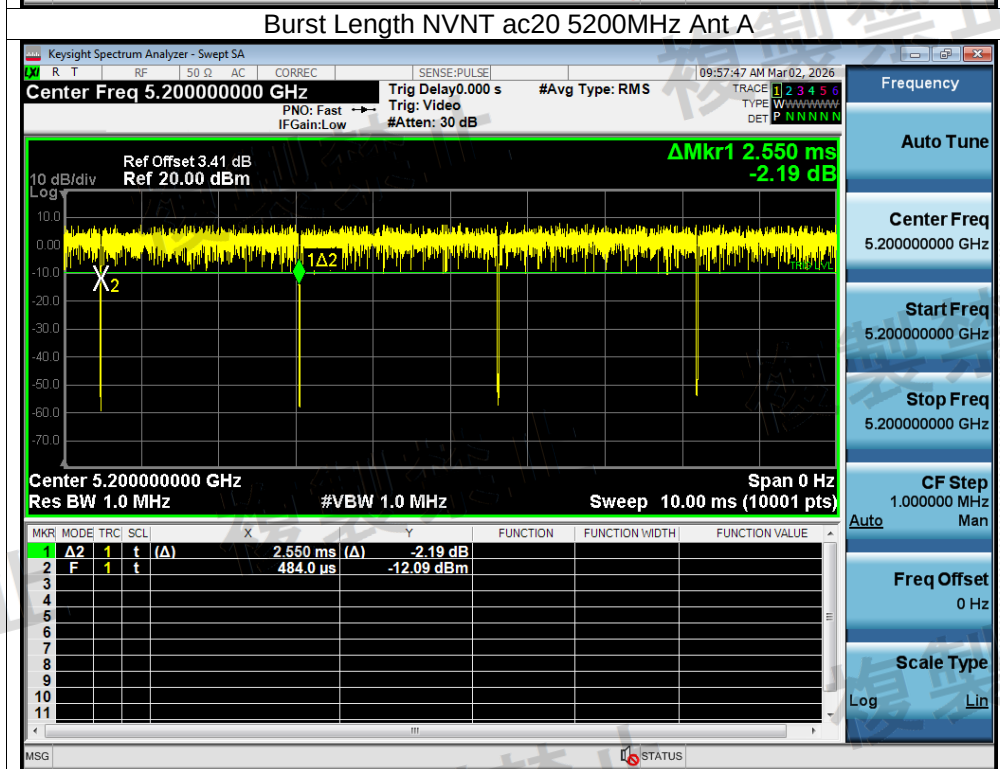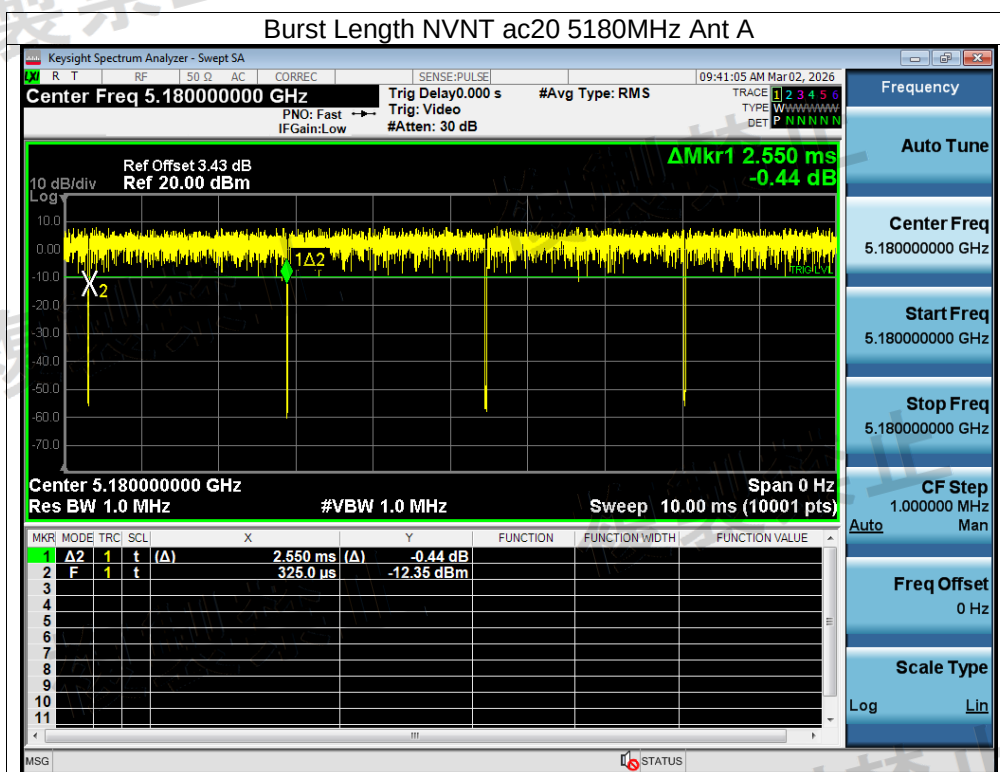

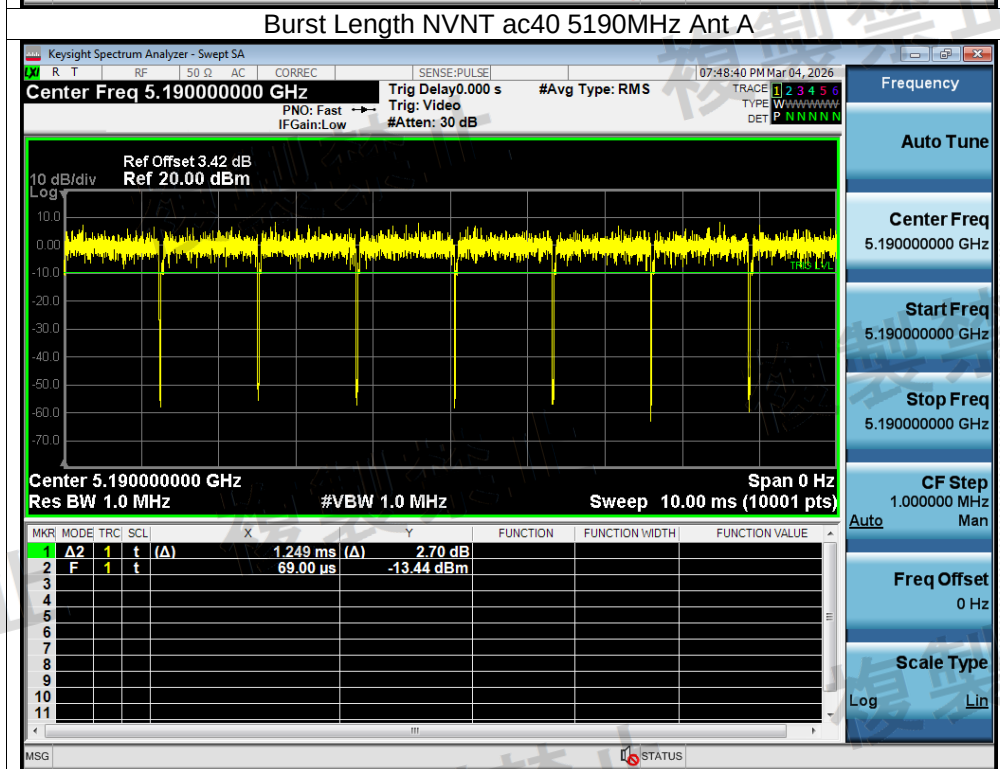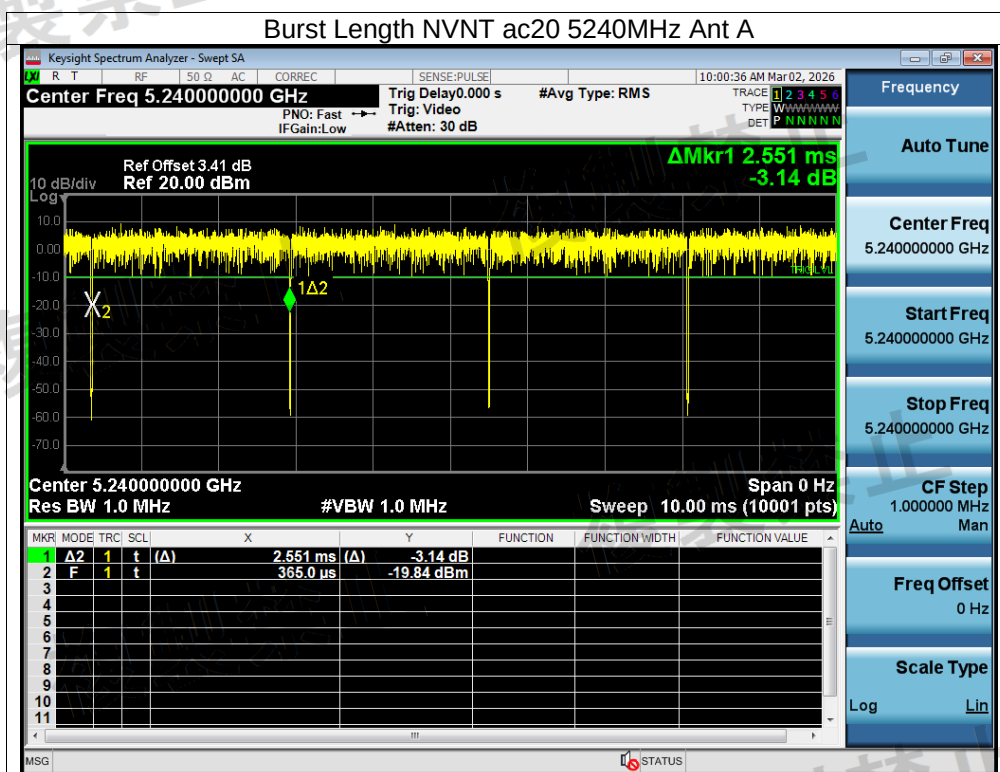

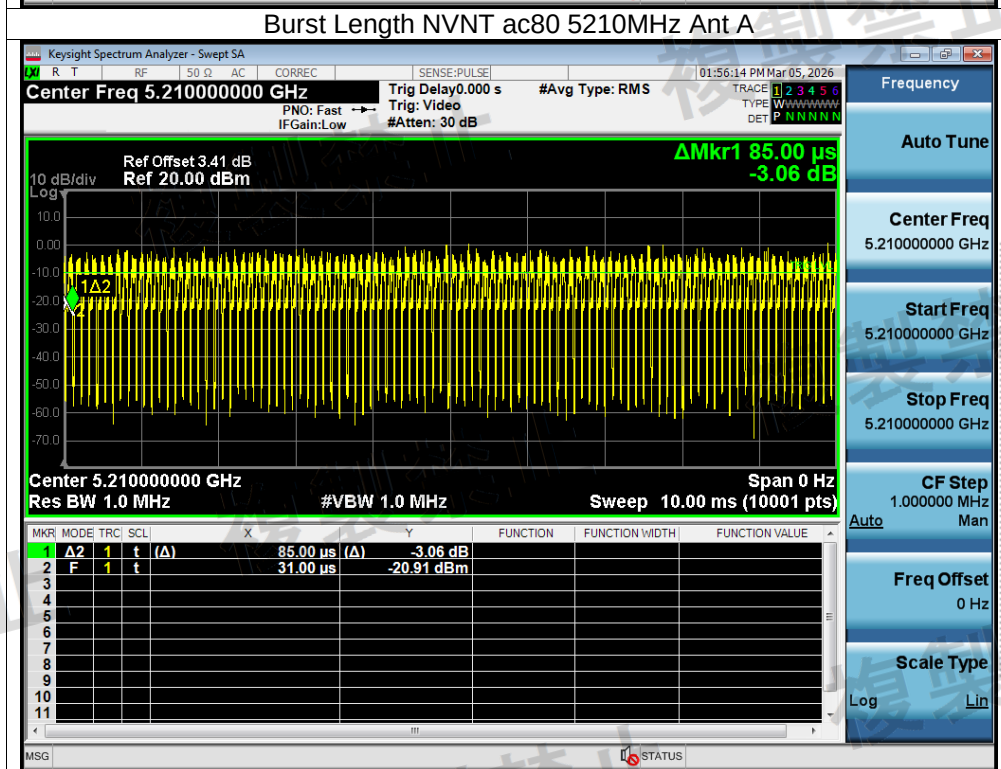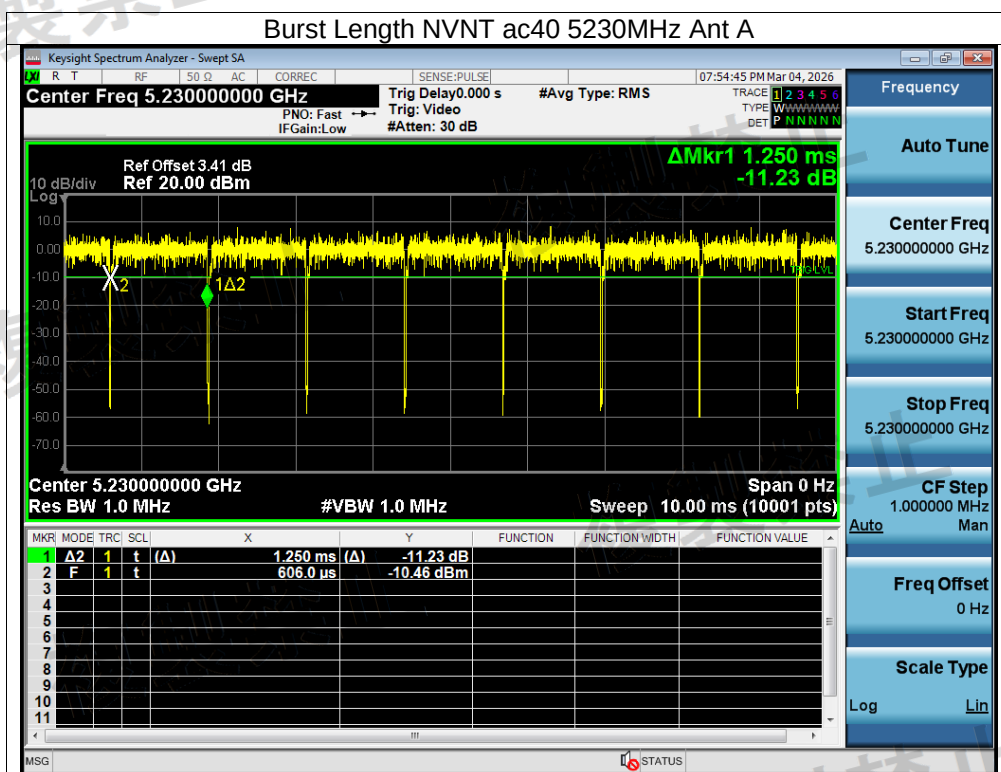


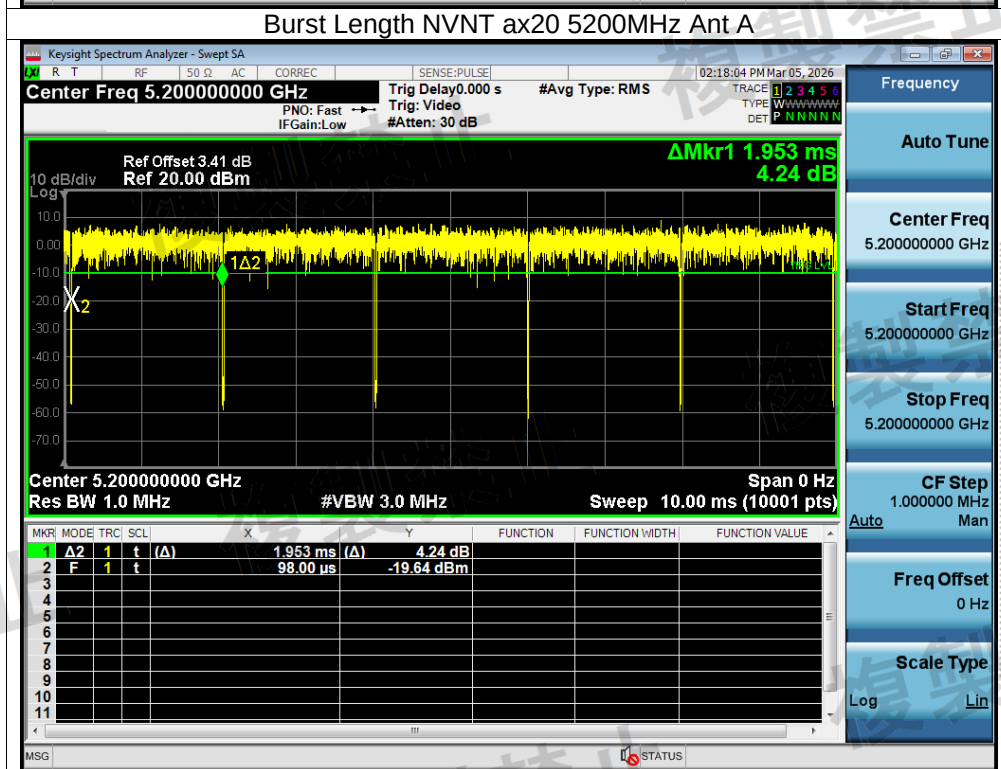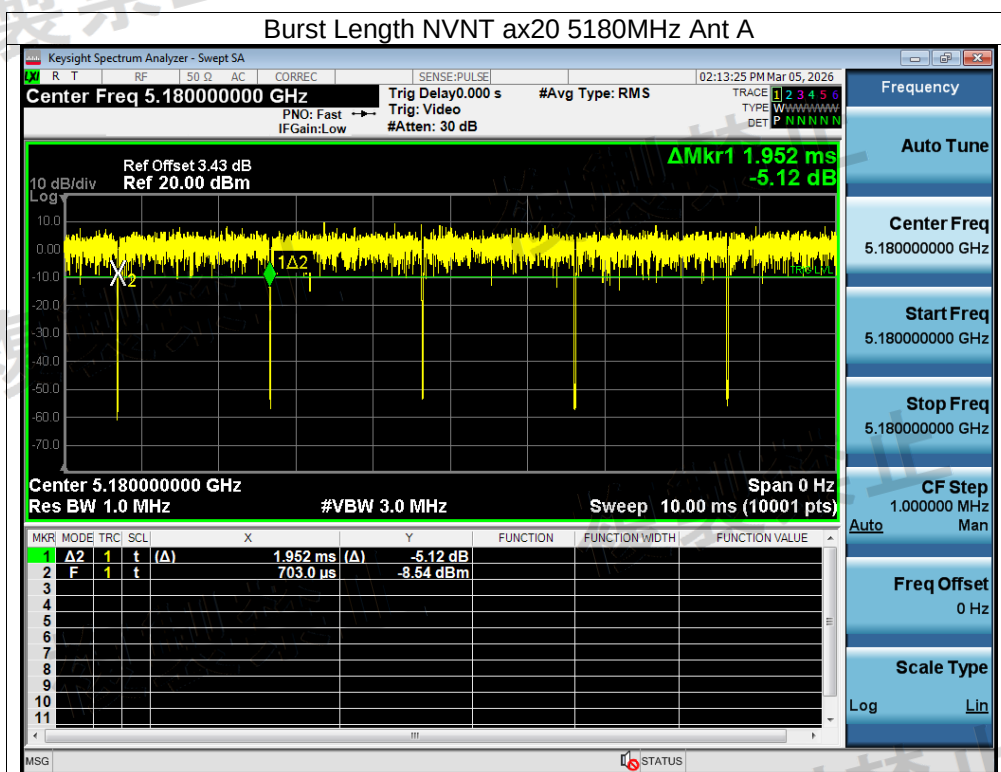

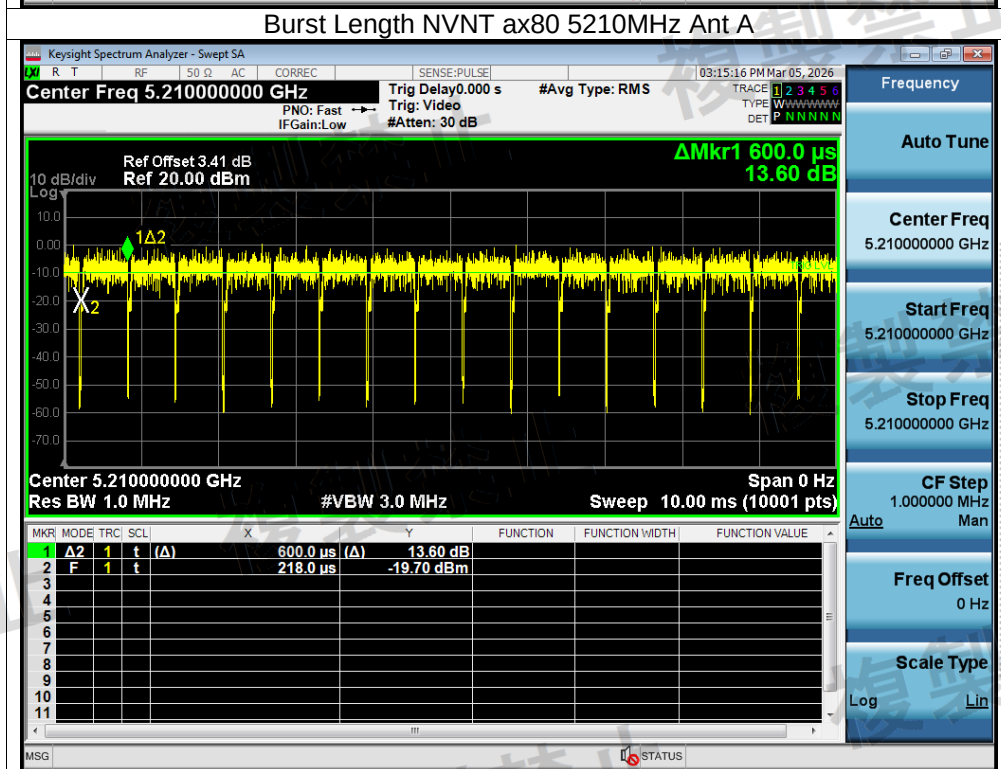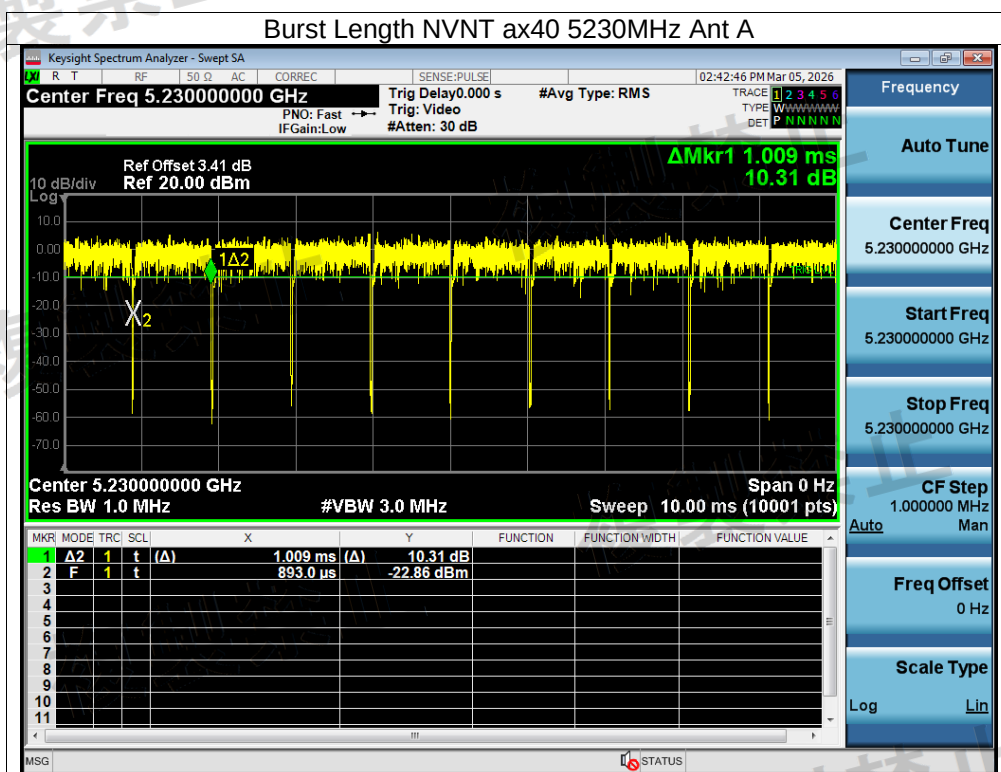

Test Graphs

Burst Length NVNT a 5180MHz Ant B

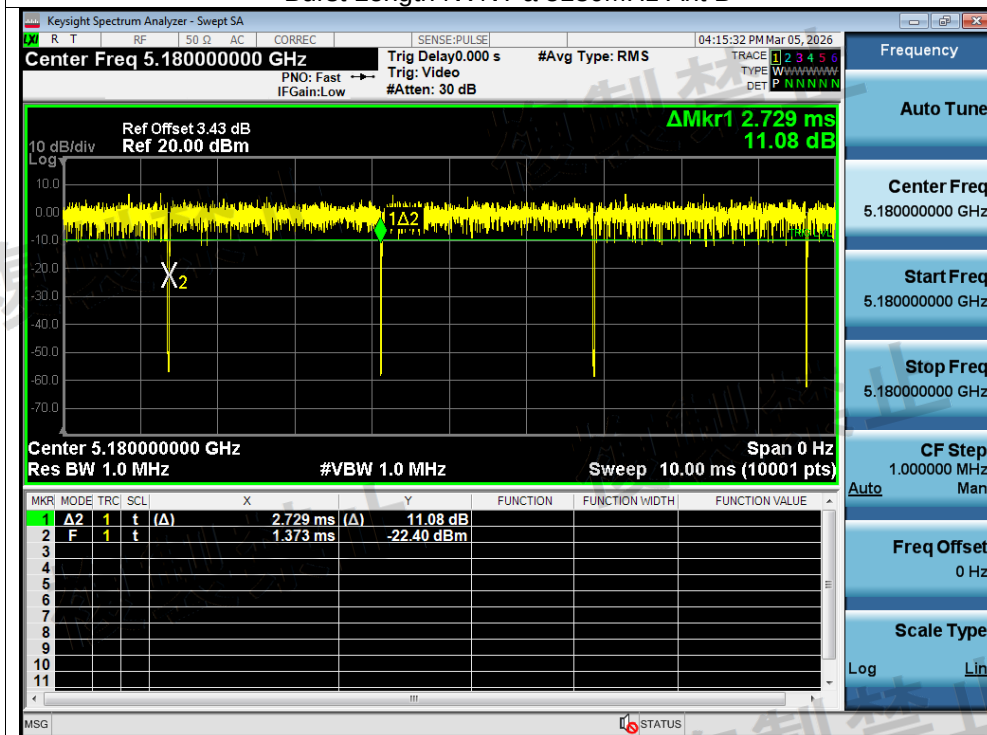

Burst Length NVNT a 5200MHz Ant B

