


## 802.11n-HT20 Out-of-Band Emissions - Ant 0 / Ant 0 + 1

## Channel 01 (2412MHz)

## 100kHz PSD reference Level



## Low Band Edge

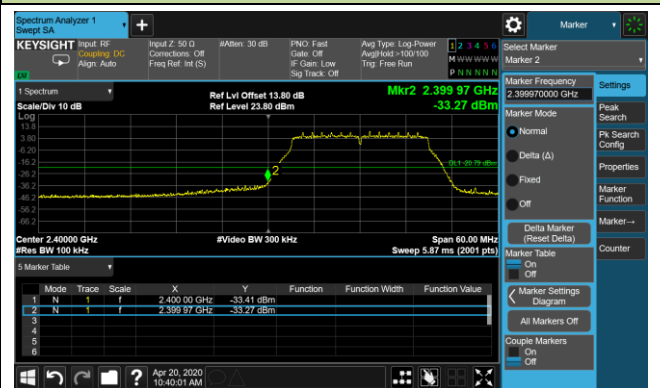

## Spurious Emission



## Channel 06 (2437MHz)

## 100kHz PSD reference Level



## Spurious Emission




## 802.11 n-HT20 Out-of-Band Emissions - Ant 0 / Ant 0 + 1

## Channel 11 (2462MHz)


## 100kHz PSD reference Level



## High Band Edge

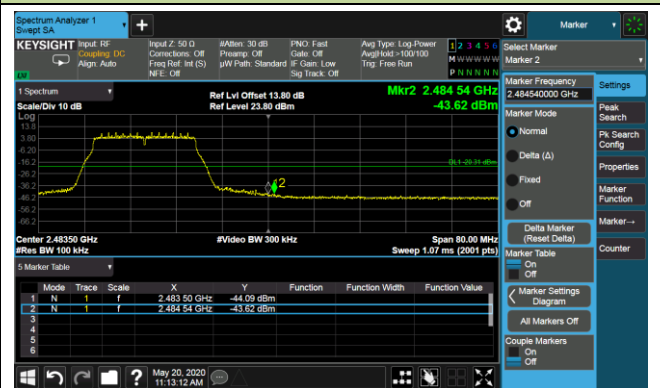


## Spurious Emission

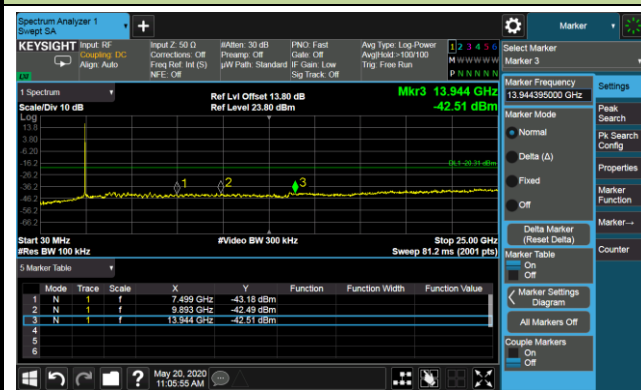


## 802.11n-HT40 Out-of-Band Emissions - Ant 0 / Ant 0 + 1

## Channel 03 (2422MHz)


## 100kHz PSD reference Level

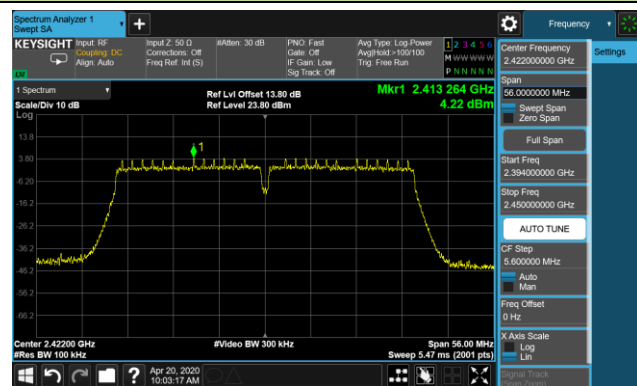

## Low Band Edge

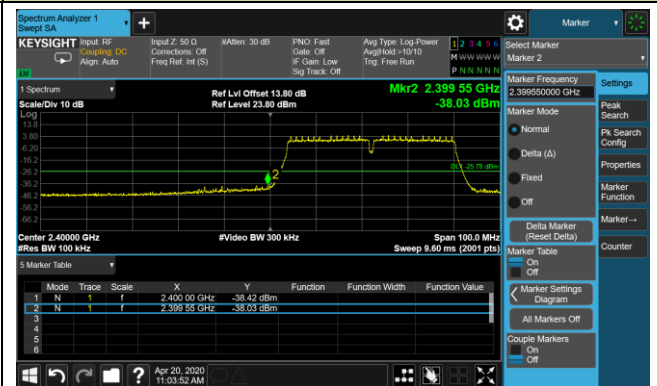


## Spurious Emission

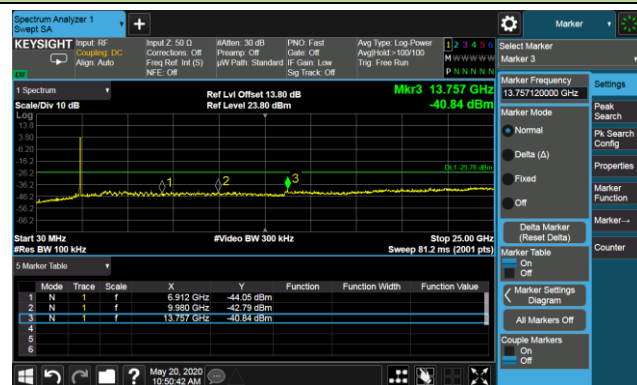

## Channel 06 (2437MHz)

## 100kHz PSD reference Level

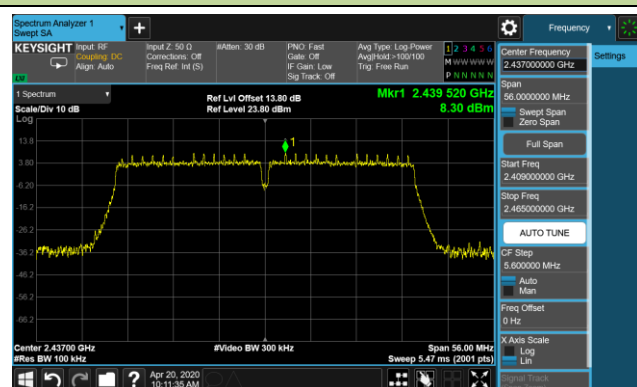

## Spurious Emission




## 802.11 n-HT40 Out-of-Band Emissions - Ant 0 / Ant 0 + 1

## Channel 09 (2452MHz)

## 100kHz PSD reference Level



## High Band Edge

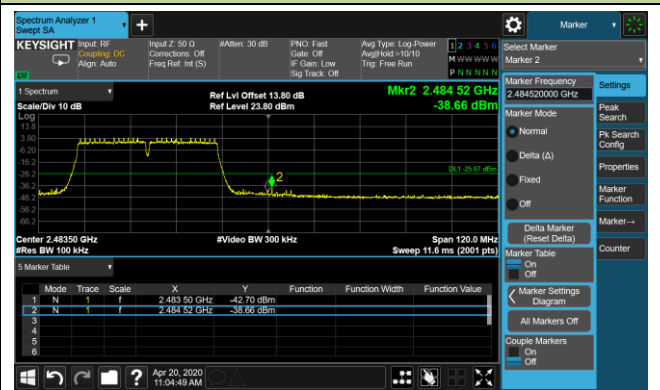


## Spurious Emission




## 802.11ax-HE20 Out-of-Band Emissions - Ant 0 / Ant 0 + 1

## Channel 01 (2412MHz)


## 100kHz PSD reference Level

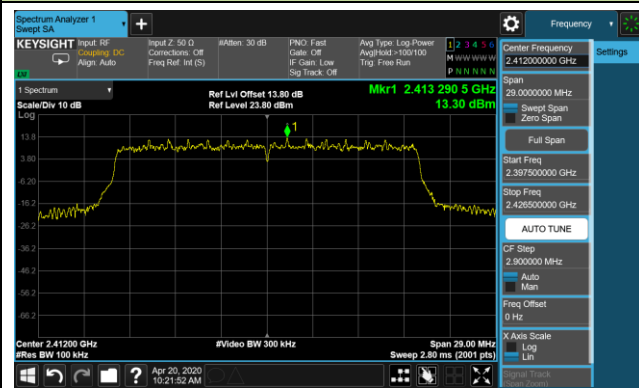

## Low Band Edge

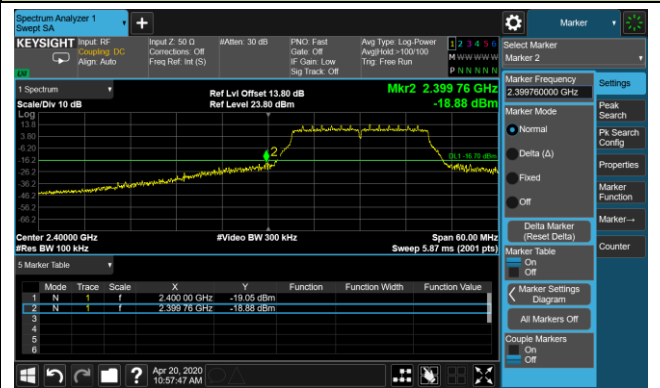


## Spurious Emission

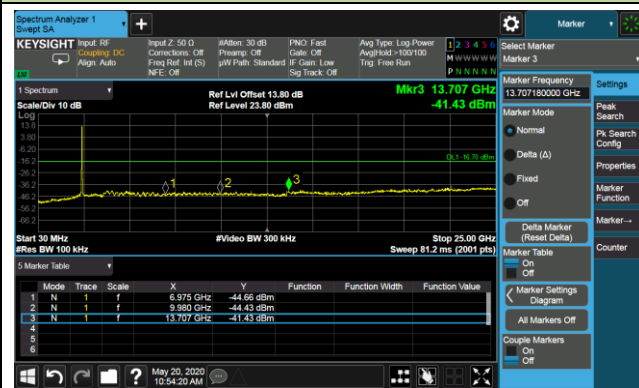

## Channel 06 (2437MHz)

## 100kHz PSD reference Level

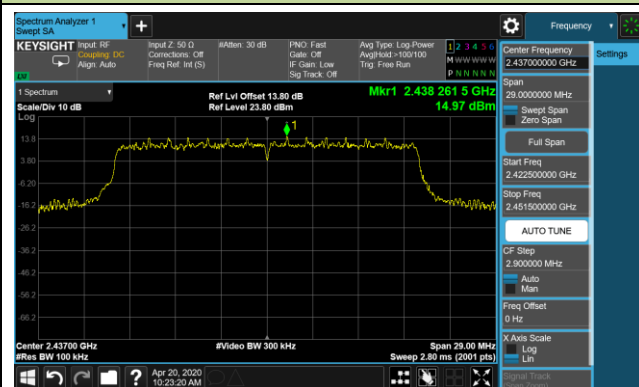

## Spurious Emission




# 802.11 ax-HE20 Out-of-Band Emissions - Ant 0 / Ant 0 + 1

## Channel 11 (2462MHz)

### 100kHz PSD reference Level



### High Band Edge

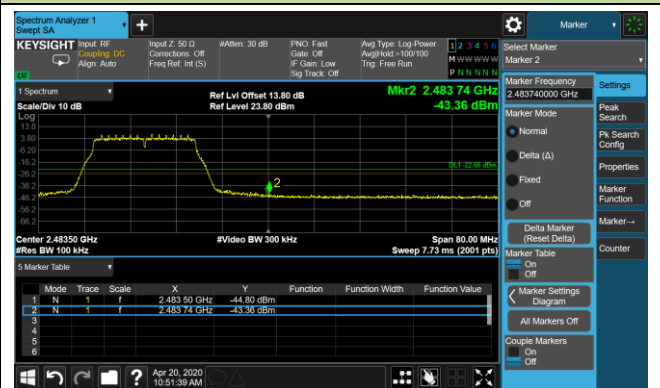


### Spurious Emission




## 802.11ax-HE40 Out-of-Band Emissions - Ant 0 / Ant 0 + 1

## Channel 03 (2422MHz)


## 100kHz PSD reference Level

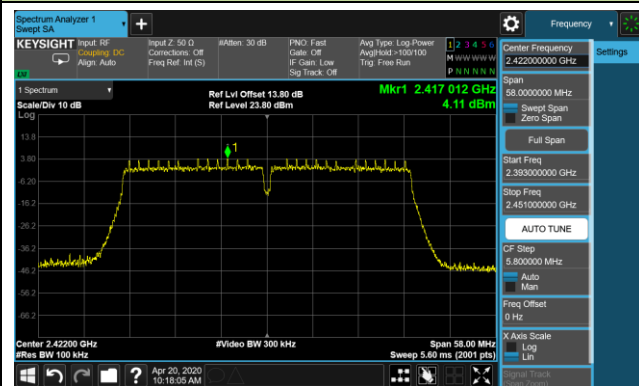

## Low Band Edge

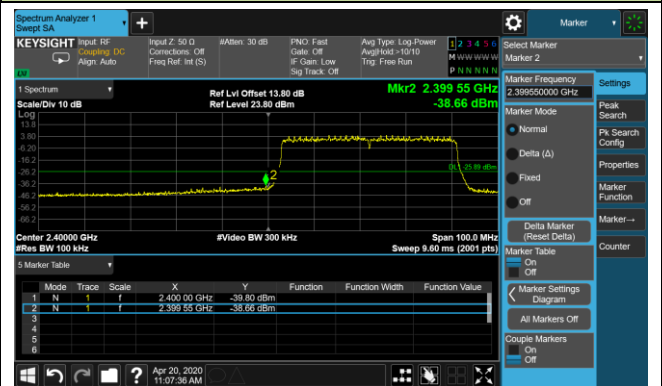


## Spurious Emission

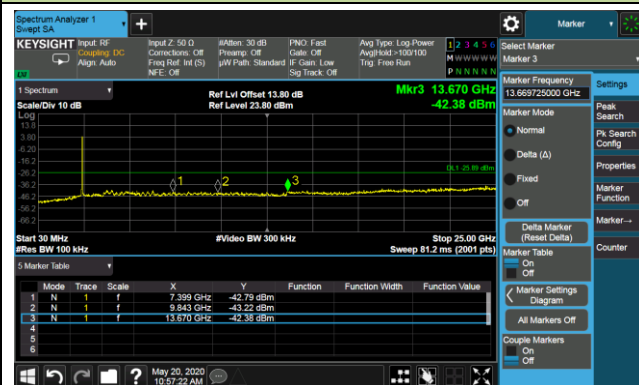

## Channel 06 (2437MHz)

## 100kHz PSD reference Level

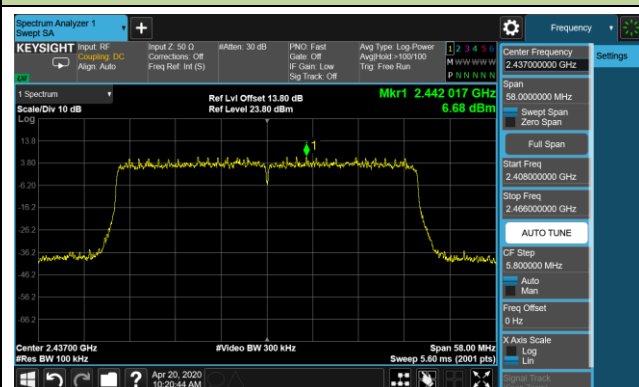

## Spurious Emission




## 802.11 ax-HET40 Out-of-Band Emissions - Ant 0 / Ant 0 + 1

## Channel 09 (2452MHz)


## 100kHz PSD reference Level



## High Band Edge

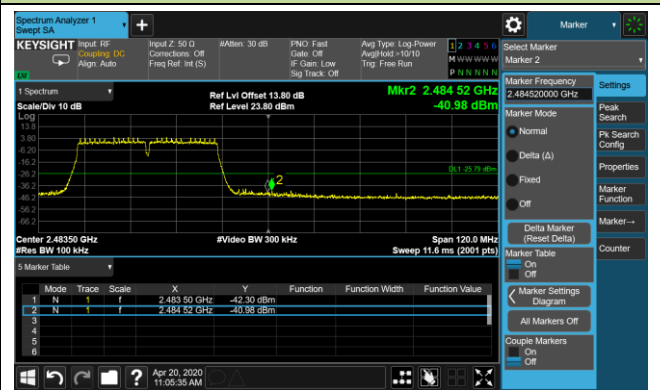

## Spurious Emission

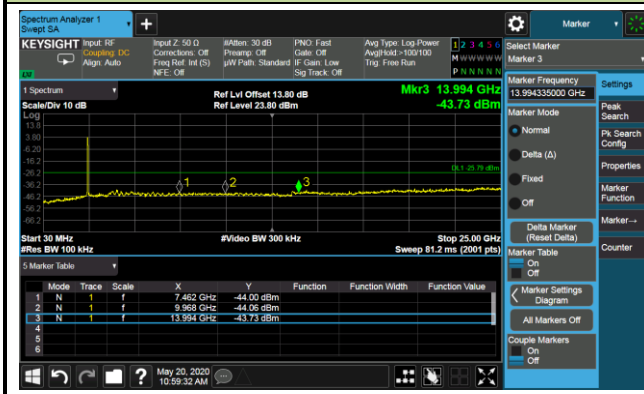

## 5.6. 開放頻帶邊緣之不必要幅射要求

### 5.6.1. 適用標準

依據國家通訊傳播委員會低功率射頻器材技術規範之第 4.10.1.5 節，使用頻帶範圍外之任意 100 千赫 (kHz) 內，發射器所產生的射頻功率相較於使用頻帶範圍中包含最高所需功率之 100 千赫 (kHz) 內的射頻功率，衰減值限制如下：

(1) 輸出功率以低功率射頻器材技術規範附件二之峰值輸出功率方式量測者，至少須衰減 20 dB，可使用射頻傳導或輻射方式測量。

(2) 輸出功率以低功率射頻器材技術規範 4.10.1(2)(2.3) 之最大傳導輸出功率量測方式者，至少須衰減 30 dB。

此外，落於第 3.5 節禁用頻段之輻射發射，應符合第 3.6 節之規定(限制要求如下)：

發射依據國家通訊傳播委員會低功率射頻器材技術規範之第 3.6 節，低功率射頻器材，除本規範各章節另有放寬規定者外，其電場強度不得超過下表之限值，且其不必要之發射皆不得大於主波發射強度。各頻段重疊處，以較嚴格之限制值為準。


| 頻率(f)<br>(MHz)            | 電場強度<br>(微伏特/公尺, $\mu\text{V/m}$ ) | 測距<br>(公尺) |
|---------------------------|------------------------------------|------------|
| $0.009 \leq f \leq 0.490$ | $2400/f(\text{kHz})$               | 300        |
| $0.490 < f \leq 1.705$    | $24000/f(\text{kHz})$              | 30         |
| $1.705 < f < 30$          | 30                                 | 30         |
| $30 \leq f \leq 88$       | 100                                | 3          |
| $88 < f \leq 216$         | 150                                | 3          |
| $216 < f \leq 960$        | 200                                | 3          |
| $960 < f$                 | 500                                | 3          |

上表規定之電場強度，發射頻率在 9 kHz~90 kHz、110 kHz~490 kHz 及 1000MHz 以上者，其量測應以平均值檢波器為基準，且須符合低功率射頻器材技術規範第 6.14.節之規定；其他發射頻率，應以 CISPR 準峰值(quasi-peak) 檢波器測量；非以上表所指定之距離測量時，應符合第 6.5 節之規定，而輻射發射之量測頻率範圍須符合低功率射頻器材技術規範第 6.12 節之規定。

### 5.6.2. 量測方法

待測物置於高 80 公分之非導體桌面（落地型產品置於地上），受測物與配件設備之電源線無須束綁，桌面上受測設備的所有電源線由桌子的後緣垂下沿旋轉桌表面接至交流插座。落地型設備的交流電源線可以方便的型態走線。桌面可 360 度旋轉，接收天線置於距待測物 3m 距離，高度可在 1 至 4 公尺間變動，以量測待測物之最大輻射電場強度。接收天線並應於水準及垂直極化方向各量測一次。


### 5.6.3. 測試架構圖

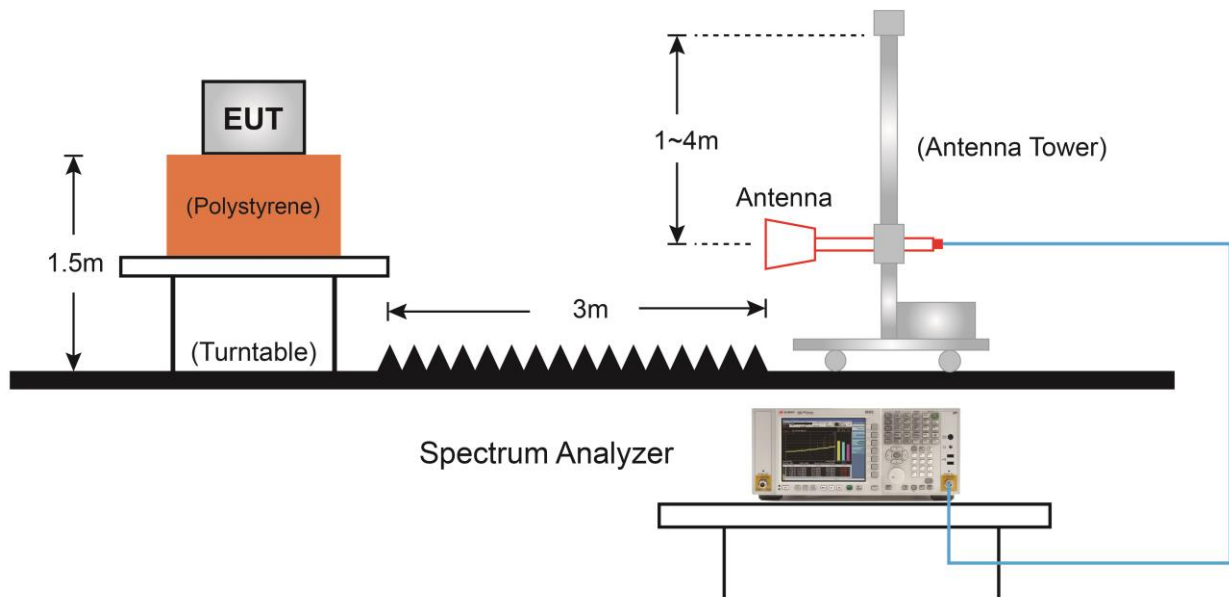

備 註: 使用頻率範圍外之任意 100 千赫雜訊, 使用輻射方式測量, 6 dB 頻寬使用 1MHz 遠大於 100kHz 仍可 PASS, 檢附其測試數據。

#### 5.6.4. 測試結果

|           |                                                      |                      |                 |
|-----------|------------------------------------------------------|----------------------|-----------------|
| EUT       | AX6600 WI-FI 6 三頻電競路由器                               | Date of Test         | 2020-05-16      |
| Factor    | BBHA 9120D                                           | Temp. / Humidity     | 17°C/51%        |
| Polarity  | Horizontal                                           | Site / Test Engineer | AC1 / Kevin Ker |
| Test Mode | Transmit by 802.11b at channel 2412MHz<br>(CDD Mode) | Test Voltage         | 110V/60Hz       |

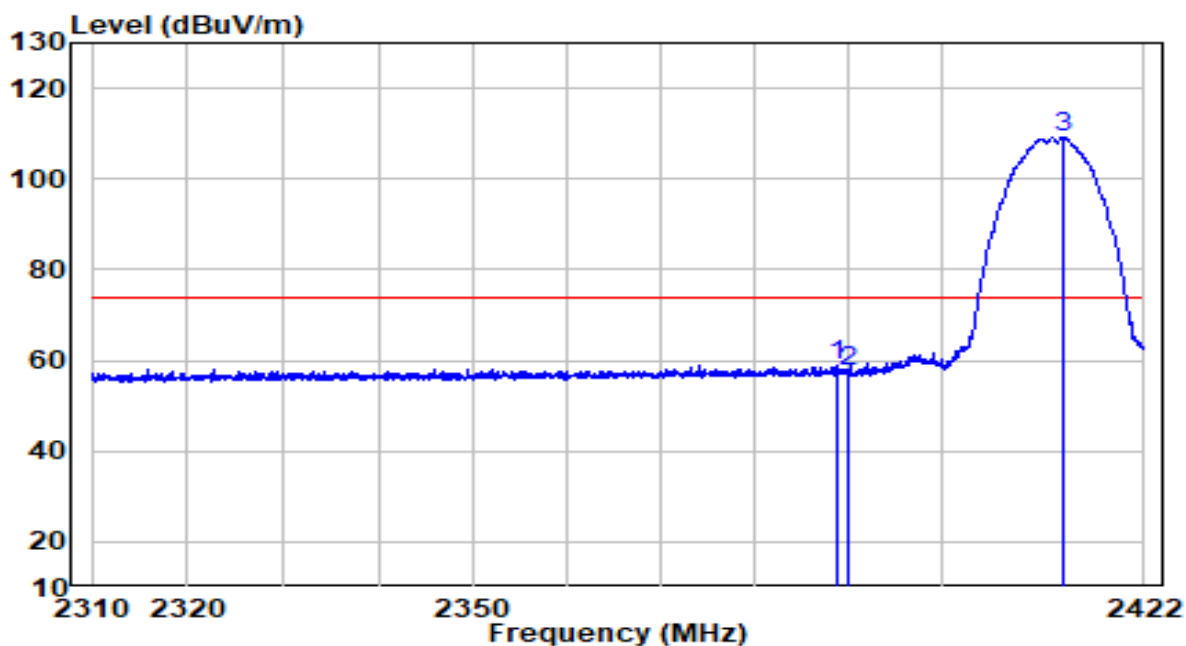


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | 2388.848        | 26.43          | 32.29    | 58.72                | -15.28      | 74.00          | Peak              |
| 2  | 2390.000        | 25.47          | 32.30    | 57.76                | -16.24      | 74.00          | Peak              |
| 3  | * 2413.096      | 76.77          | 32.40    | 109.16               | N/A         | N/A            | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                      |                      |                 |
|-----------|------------------------------------------------------|----------------------|-----------------|
| EUT       | AX6600 WI-FI 6 三頻電競路由器                               | Date of Test         | 2020-05-16      |
| Factor    | BBHA 9120D                                           | Temp. / Humidity     | 17°C/51%        |
| Polarity  | Horizontal                                           | Site / Test Engineer | AC1 / Kevin Ker |
| Test Mode | Transmit by 802.11b at channel 2412MHz<br>(CDD Mode) | Test Voltage         | 110V/60Hz       |

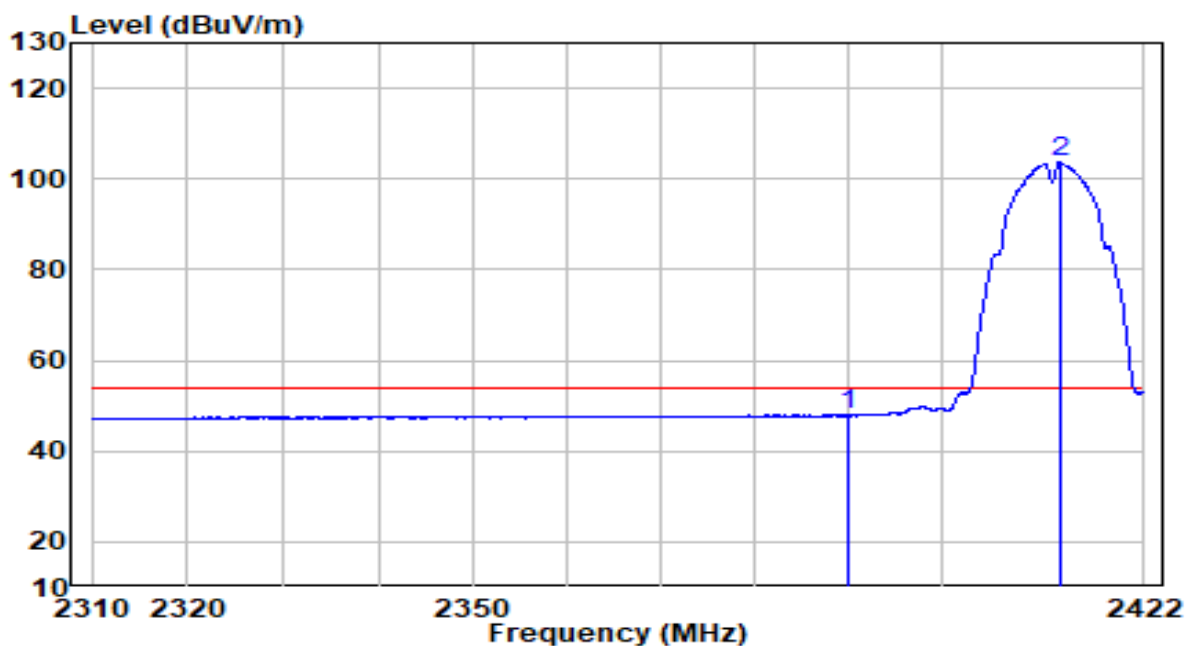


| No |   | Frequency<br>(MHz) | Reading<br>(dBuV) | C.F<br>(dB) | Measurement<br>(dBuV/m) | Margin<br>(dB) | Limit<br>(dBuV/m) | Remark<br>(QP/PK/AV) |
|----|---|--------------------|-------------------|-------------|-------------------------|----------------|-------------------|----------------------|
| 1  |   | 2390.000           | 15.55             | 32.30       | 47.85                   | -6.15          | 54.00             | Peak                 |
| 2  | * | 2412.760           | 71.17             | 32.40       | 103.57                  | N/A            | N/A               | Peak                 |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                      |                      |                 |
|-----------|------------------------------------------------------|----------------------|-----------------|
| EUT       | AX6600 WI-FI 6 三頻電競路由器                               | Date of Test         | 2020-05-16      |
| Factor    | BBHA 9120D                                           | Temp. / Humidity     | 17°C/51%        |
| Polarity  | Vertical                                             | Site / Test Engineer | AC1 / Kevin Ker |
| Test Mode | Transmit by 802.11b at channel 2412MHz<br>(CDD Mode) | Test Voltage         | 110V/60Hz       |

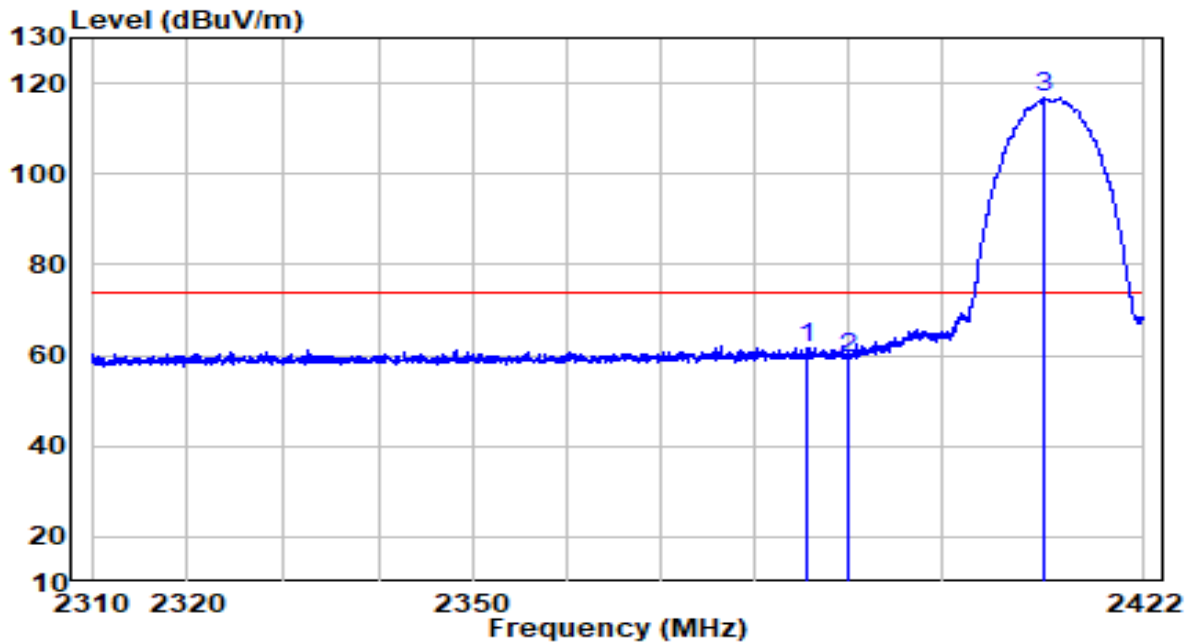


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | 2385.544        | 29.57          | 32.28    | 61.85                | -12.15      | 74.00          | Peak              |
| 2  | 2390.000        | 27.18          | 32.30    | 59.47                | -14.53      | 74.00          | Peak              |
| 3  | * 2411.136      | 84.41          | 32.39    | 116.80               | N/A         | N/A            | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                      |                      |                 |
|-----------|------------------------------------------------------|----------------------|-----------------|
| EUT       | AX6600 WI-FI 6 三頻電競路由器                               | Date of Test         | 2020-05-16      |
| Factor    | BBHA 9120D                                           | Temp. / Humidity     | 17°C/51%        |
| Polarity  | Vertical                                             | Site / Test Engineer | AC1 / Kevin Ker |
| Test Mode | Transmit by 802.11b at channel 2412MHz<br>(CDD Mode) | Test Voltage         | 110V/60Hz       |

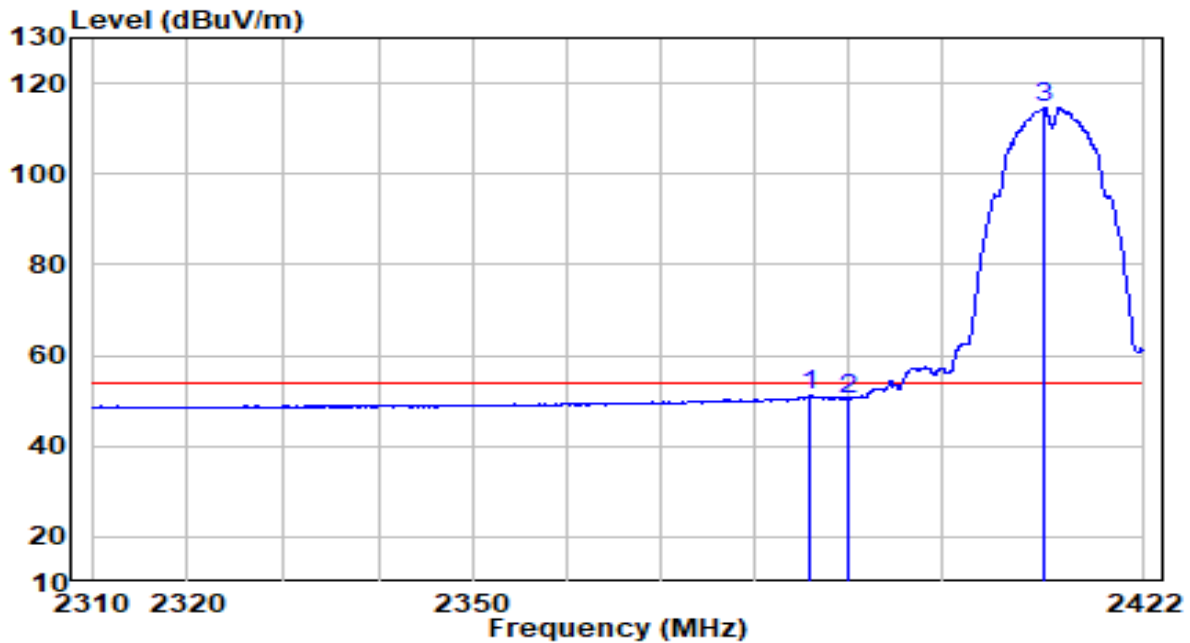


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | 2385.824        | 18.82          | 32.28    | 51.10                | -2.90       | 54.00          | Peak              |
| 2  | 2390.000        | 18.10          | 32.30    | 50.40                | -3.60       | 54.00          | Peak              |
| 3  | * 2411.248      | 82.42          | 32.39    | 114.81               | N/A         | N/A            | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                      |                      |                 |
|-----------|------------------------------------------------------|----------------------|-----------------|
| EUT       | AX6600 WI-FI 6 三頻電競路由器                               | Date of Test         | 2020-05-16      |
| Factor    | BBHA 9120D                                           | Temp. / Humidity     | 17°C/51%        |
| Polarity  | Horizontal                                           | Site / Test Engineer | AC1 / Kevin Ker |
| Test Mode | Transmit by 802.11b at channel 2462MHz<br>(CDD Mode) | Test Voltage         | 110V/60Hz       |

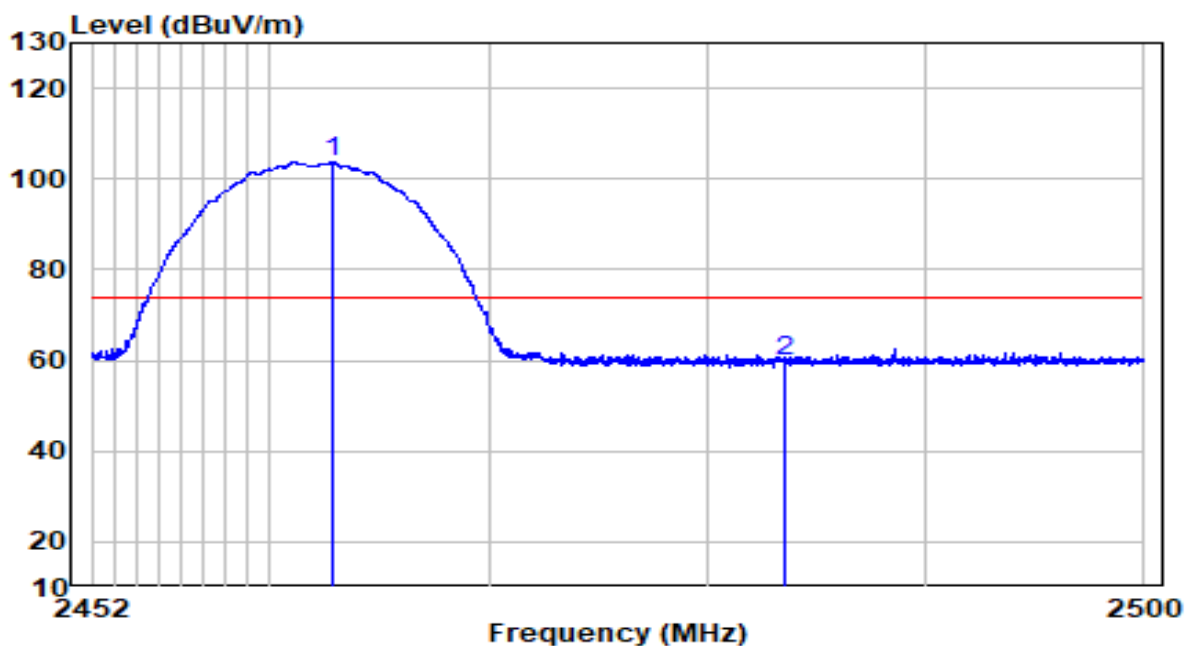


| No |   | Frequency<br>(MHz) | Reading<br>(dBuV) | C.F<br>(dB) | Measurement<br>(dBuV/m) | Margin<br>(dB) | Limit<br>(dBuV/m) | Remark<br>(QP/PK/AV) |
|----|---|--------------------|-------------------|-------------|-------------------------|----------------|-------------------|----------------------|
| 1  | * | 2462.872           | 71.10             | 32.62       | 103.72                  | N/A            | N/A               | Peak                 |
| 2  |   | 2483.500           | 26.94             | 32.71       | 59.65                   | -14.35         | 74.00             | Peak                 |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                      |                      |                 |
|-----------|------------------------------------------------------|----------------------|-----------------|
| EUT       | AX6600 WI-FI 6 三頻電競路由器                               | Date of Test         | 2020-05-16      |
| Factor    | BBHA 9120D                                           | Temp. / Humidity     | 17°C/51%        |
| Polarity  | Horizontal                                           | Site / Test Engineer | AC1 / Kevin Ker |
| Test Mode | Transmit by 802.11b at channel 2462MHz<br>(CDD Mode) | Test Voltage         | 110V/60Hz       |

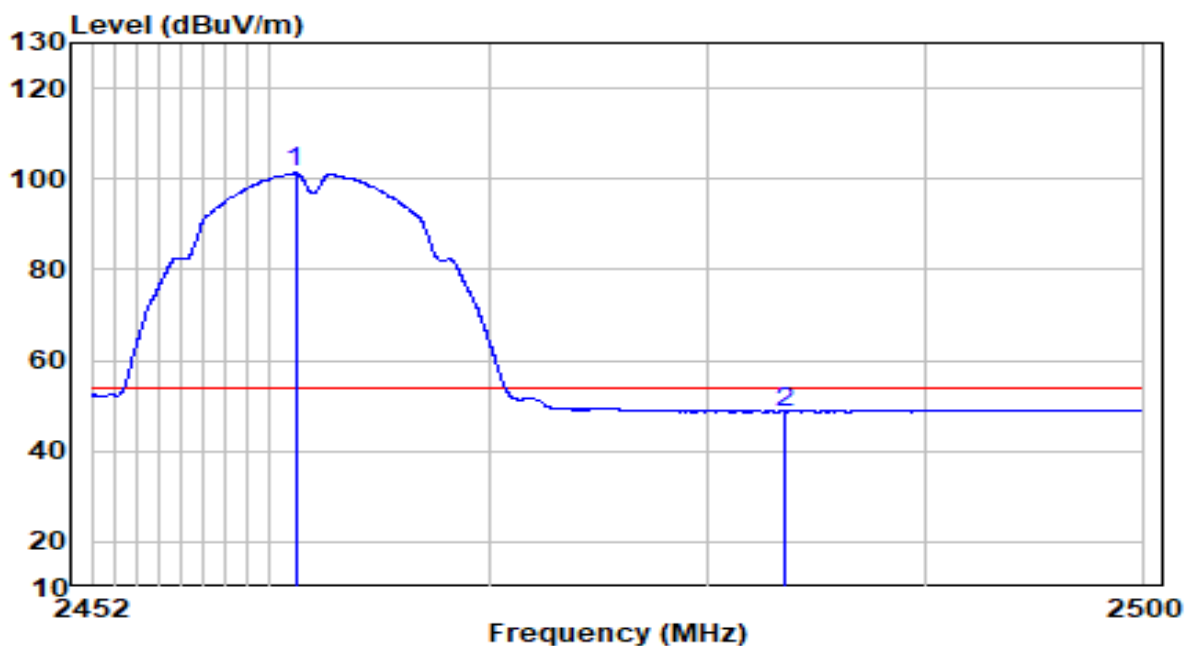


| No |   | Frequency<br>(MHz) | Reading<br>(dBuV) | C.F<br>(dB) | Measurement<br>(dBuV/m) | Margin<br>(dB) | Limit<br>(dBuV/m) | Remark<br>(QP/PK/AV) |
|----|---|--------------------|-------------------|-------------|-------------------------|----------------|-------------------|----------------------|
| 1  | * | 2461.216           | 68.67             | 32.61       | 101.28                  | 47.28          | 54.00             | Peak                 |
| 2  |   | 2483.500           | 16.00             | 32.71       | 48.71                   | -5.29          | 54.00             | Peak                 |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                      |                      |                 |
|-----------|------------------------------------------------------|----------------------|-----------------|
| EUT       | AX6600 WI-FI 6 三頻電競路由器                               | Date of Test         | 2020-05-16      |
| Factor    | BBHA 9120D                                           | Temp. / Humidity     | 17°C/51%        |
| Polarity  | Vertical                                             | Site / Test Engineer | AC1 / Kevin Ker |
| Test Mode | Transmit by 802.11b at channel 2462MHz<br>(CDD Mode) | Test Voltage         | 110V/60Hz       |

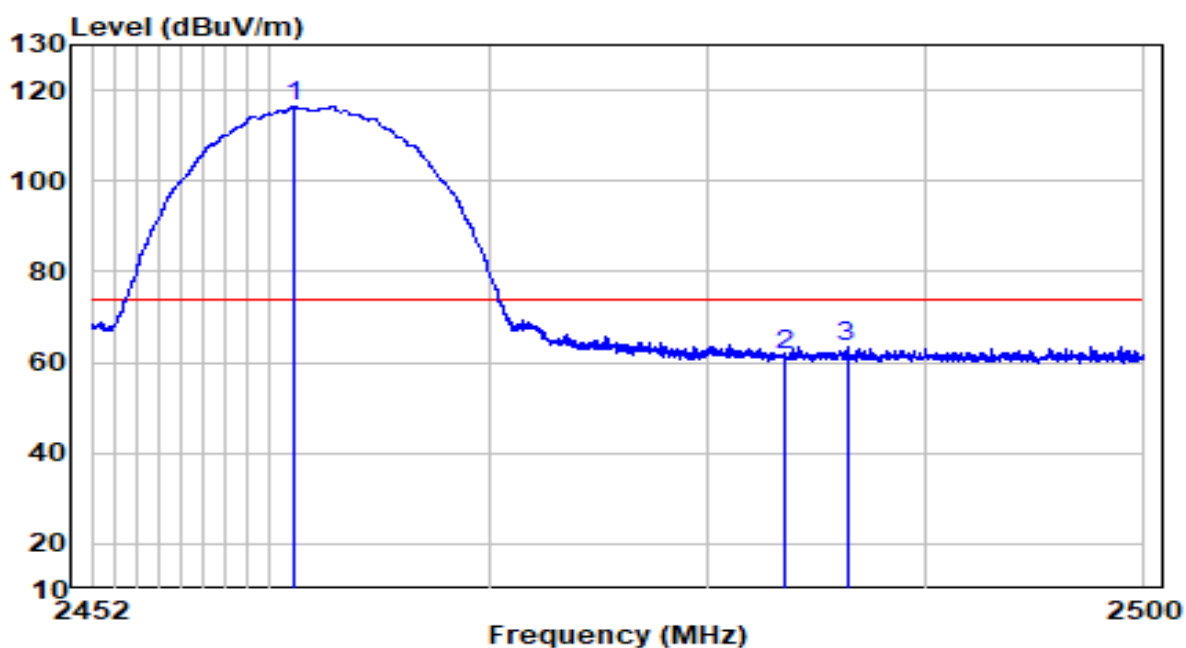


| No |   | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | * | 2461.120        | 83.78          | 32.61    | 116.39               | N/A         | N/A            | Peak              |
| 2  |   | 2483.500        | 28.69          | 32.71    | 61.40                | -12.60      | 74.00          | Peak              |
| 3  |   | 2486.344        | 30.73          | 32.72    | 63.45                | -10.55      | 74.00          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                      |                      |                 |
|-----------|------------------------------------------------------|----------------------|-----------------|
| EUT       | AX6600 WI-FI 6 三頻電競路由器                               | Date of Test         | 2020-05-16      |
| Factor    | BBHA 9120D                                           | Temp. / Humidity     | 17°C/51%        |
| Polarity  | Vertical                                             | Site / Test Engineer | AC1 / Kevin Ker |
| Test Mode | Transmit by 802.11b at channel 2462MHz<br>(CDD Mode) | Test Voltage         | 110V/60Hz       |

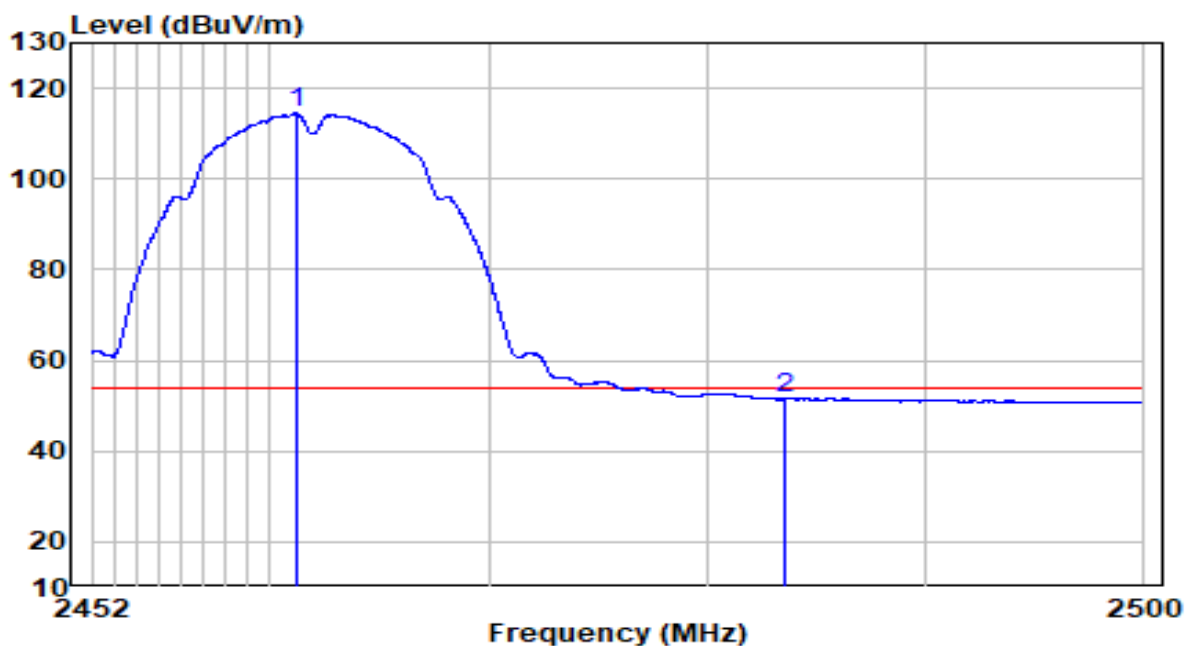


| No |   | Frequency<br>(MHz) | Reading<br>(dBuV) | C.F<br>(dB) | Measurement<br>(dBuV/m) | Margin<br>(dB) | Limit<br>(dBuV/m) | Remark<br>(QP/PK/AV) |
|----|---|--------------------|-------------------|-------------|-------------------------|----------------|-------------------|----------------------|
| 1  | * | 2461.240           | 81.82             | 32.61       | 114.43                  | N/A            | N/A               | Peak                 |
| 2  |   | 2483.500           | 18.80             | 32.71       | 51.51                   | -2.49          | 54.00             | Peak                 |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                      |                      |                 |
|-----------|------------------------------------------------------|----------------------|-----------------|
| EUT       | AX6600 WI-FI 6 三頻電競路由器                               | Date of Test         | 2020-05-16      |
| Factor    | BBHA 9120D                                           | Temp. / Humidity     | 17°C/51%        |
| Polarity  | Horizontal                                           | Site / Test Engineer | AC1 / Kevin Ker |
| Test Mode | Transmit by 802.11g at channel 2412MHz<br>(CDD Mode) | Test Voltage         | 110V/60Hz       |

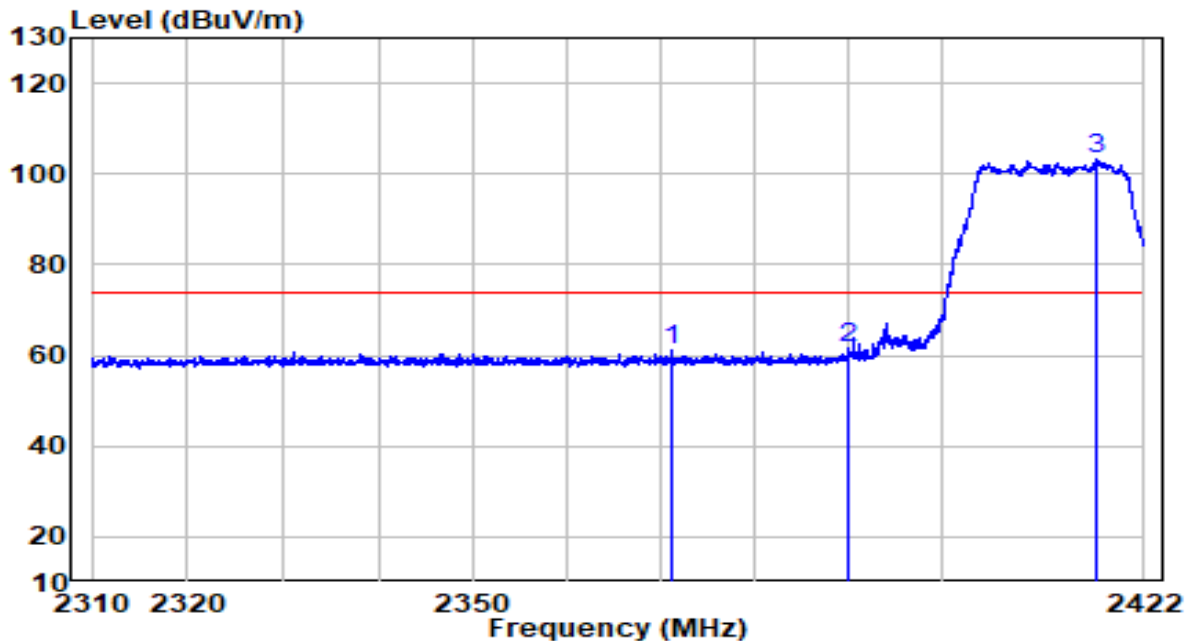


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | 2371.208        | 28.94          | 32.21    | 61.16                | -12.84      | 74.00          | Peak              |
| 2  | 2390.000        | 29.16          | 32.30    | 61.46                | -12.54      | 74.00          | Peak              |
| 3  | * 2416.904      | 70.80          | 32.41    | 103.21               | N/A         | N/A            | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                      |                      |                 |
|-----------|------------------------------------------------------|----------------------|-----------------|
| EUT       | AX6600 WI-FI 6 三頻電競路由器                               | Date of Test         | 2020-05-16      |
| Factor    | BBHA 9120D                                           | Temp. / Humidity     | 17°C/51%        |
| Polarity  | Horizontal                                           | Site / Test Engineer | AC1 / Kevin Ker |
| Test Mode | Transmit by 802.11g at channel 2412MHz<br>(CDD Mode) | Test Voltage         | 110V/60Hz       |

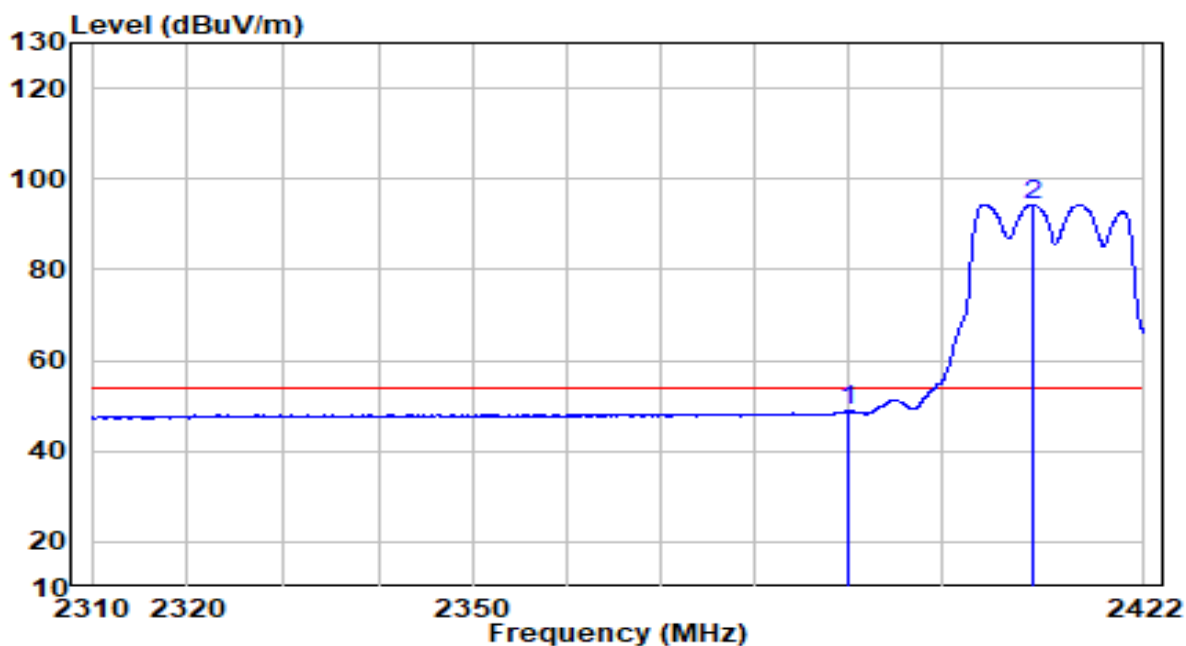


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | 2390.000        | 16.42          | 32.30    | 48.72                | -5.28       | 54.00          | Peak              |
| 2  | * 2409.792      | 62.03          | 32.38    | 94.41                | N/A         | N/A            | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                      |                      |                 |
|-----------|------------------------------------------------------|----------------------|-----------------|
| EUT       | AX6600 WI-FI 6 三頻電競路由器                               | Date of Test         | 2020-05-16      |
| Factor    | BBHA 9120D                                           | Temp. / Humidity     | 17°C/51%        |
| Polarity  | Vertical                                             | Site / Test Engineer | AC1 / Kevin Ker |
| Test Mode | Transmit by 802.11g at channel 2412MHz<br>(CDD Mode) | Test Voltage         | 110V/60Hz       |

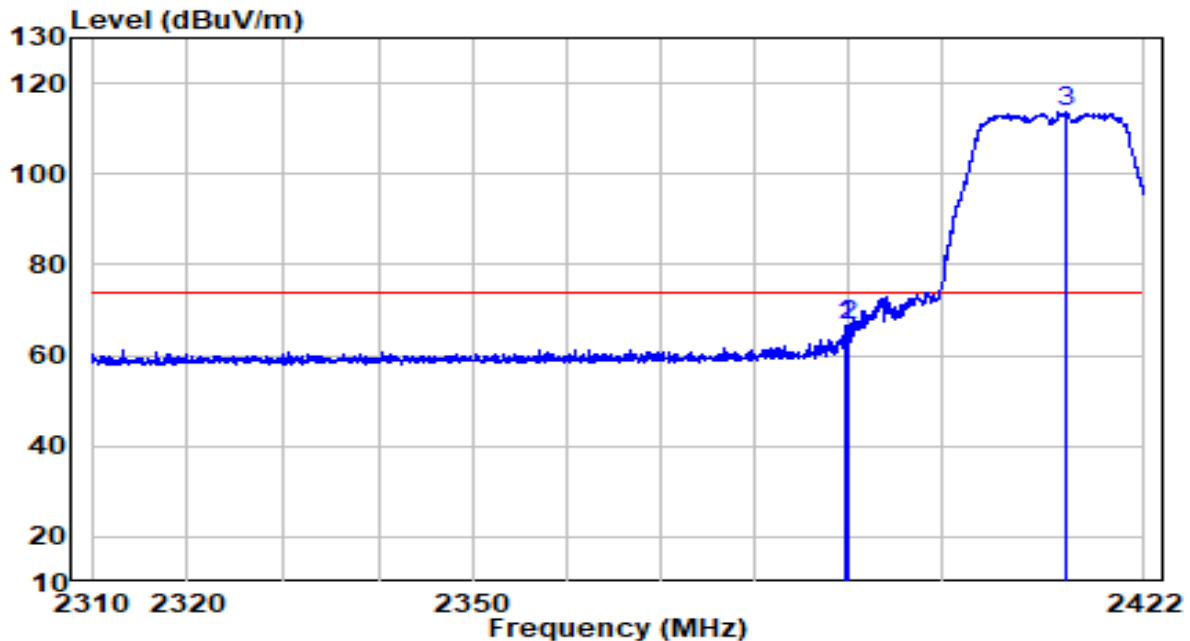


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | 2389.688        | 34.20          | 32.29    | 66.50                | -7.50       | 74.00          | Peak              |
| 2  | 2390.000        | 34.14          | 32.30    | 66.44                | -7.56       | 74.00          | Peak              |
| 3  | *               | 2413.488       | 81.32    | 32.40                | 113.72      | N/A            | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                      |                      |                 |
|-----------|------------------------------------------------------|----------------------|-----------------|
| EUT       | AX6600 WI-FI 6 三頻電競路由器                               | Date of Test         | 2020-05-16      |
| Factor    | BBHA 9120D                                           | Temp. / Humidity     | 17°C/51%        |
| Polarity  | Vertical                                             | Site / Test Engineer | AC1 / Kevin Ker |
| Test Mode | Transmit by 802.11g at channel 2412MHz<br>(CDD Mode) | Test Voltage         | 110V/60Hz       |

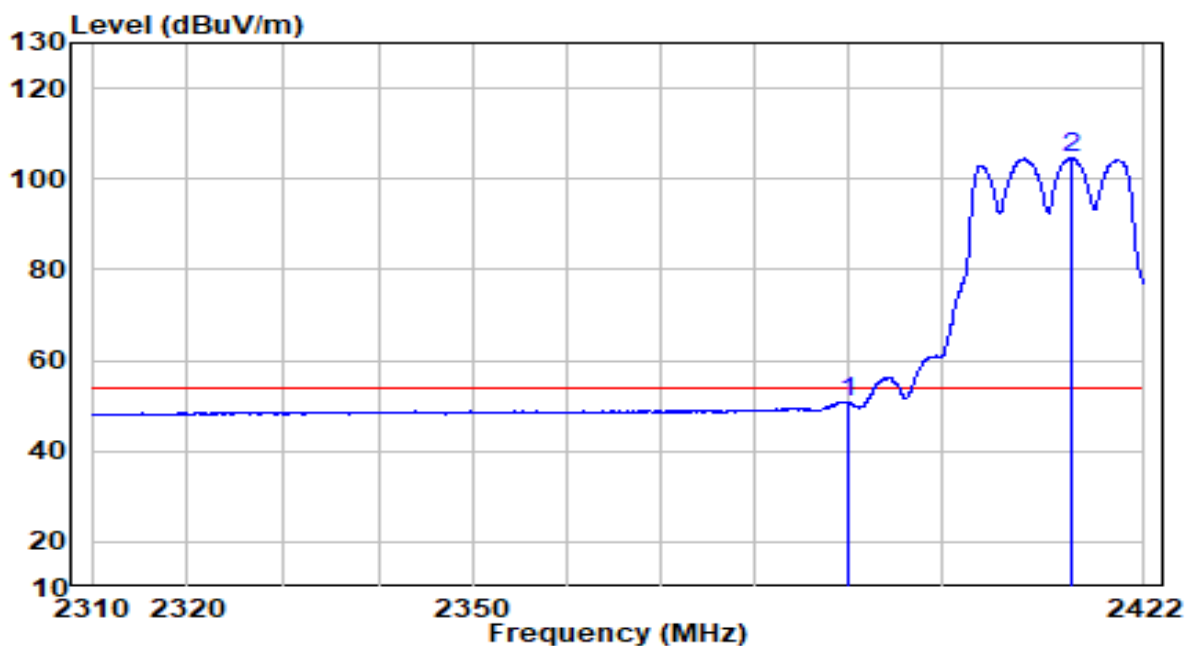


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | 2390.000        | 18.48          | 32.30    | 50.77                | -3.23       | 54.00          | Peak              |
| 2  | * 2414.104      | 72.17          | 32.40    | 104.57               | N/A         | N/A            | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                      |                      |                 |
|-----------|------------------------------------------------------|----------------------|-----------------|
| EUT       | AX6600 WI-FI 6 三頻電競路由器                               | Date of Test         | 2020-05-16      |
| Factor    | BBHA 9120D                                           | Temp. / Humidity     | 17°C/51%        |
| Polarity  | Horizontal                                           | Site / Test Engineer | AC1 / Kevin Ker |
| Test Mode | Transmit by 802.11g at channel 2417MHz<br>(CDD Mode) | Test Voltage         | 110V/60Hz       |

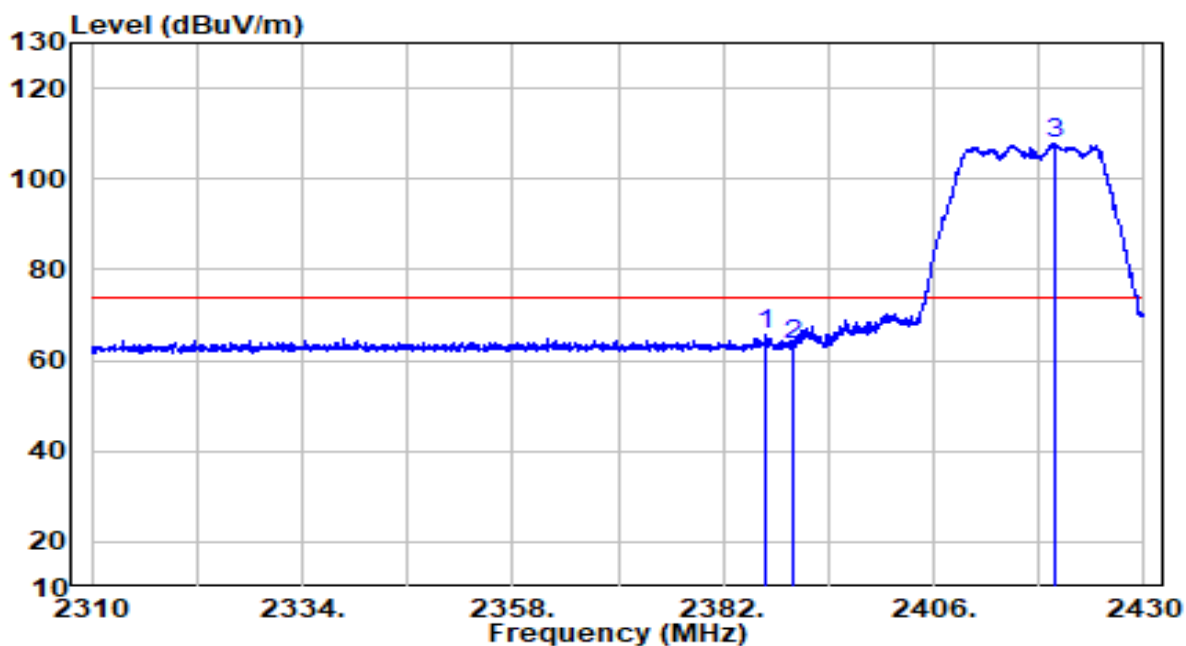


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | 2386.800        | 33.26          | 32.28    | 65.54                | -8.46       | 74.00          | Peak              |
| 2  | 2390.000        | 31.02          | 32.30    | 63.32                | -10.68      | 74.00          | Peak              |
| 3  | * 2419.920      | 75.28          | 32.43    | 107.71               | N/A         | N/A            | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                      |                      |                 |
|-----------|------------------------------------------------------|----------------------|-----------------|
| EUT       | AX6600 WI-FI 6 三頻電競路由器                               | Date of Test         | 2020-05-16      |
| Factor    | BBHA 9120D                                           | Temp. / Humidity     | 17°C/51%        |
| Polarity  | Horizontal                                           | Site / Test Engineer | AC1 / Kevin Ker |
| Test Mode | Transmit by 802.11g at channel 2417MHz<br>(CDD Mode) | Test Voltage         | 110V/60Hz       |

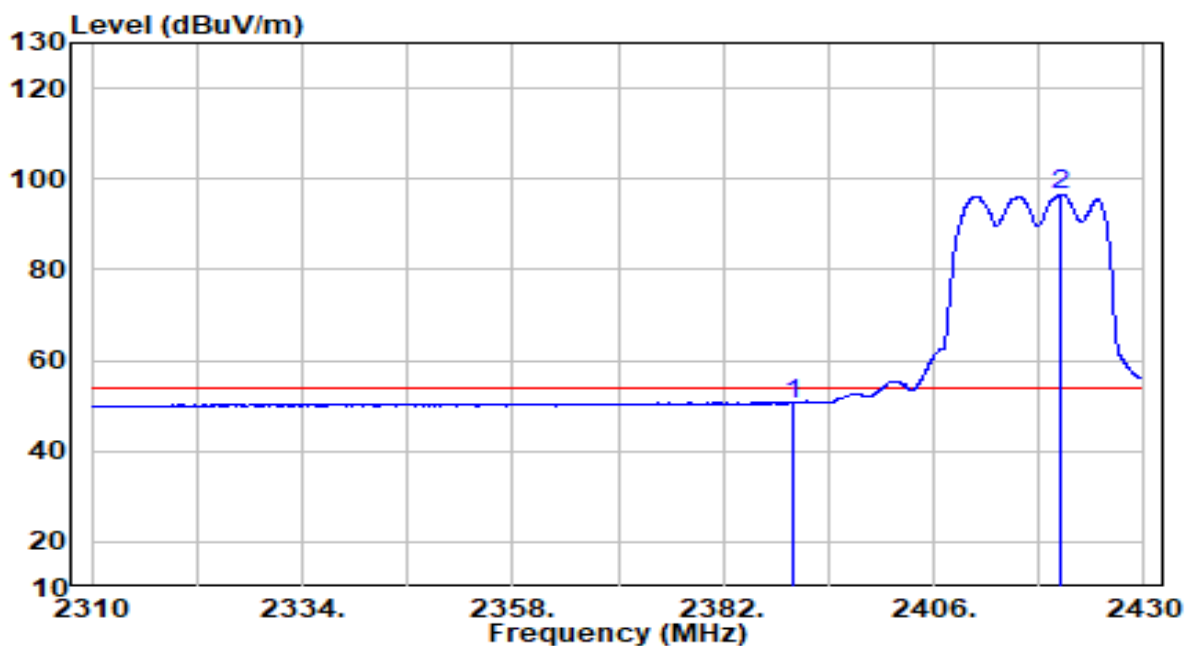


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | 2390.000        | 18.23          | 32.30    | 50.53                | -3.47       | 54.00          | Peak              |
| 2  | * 2420.400      | 63.96          | 32.43    | 96.39                | N/A         | N/A            | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                      |                      |                 |
|-----------|------------------------------------------------------|----------------------|-----------------|
| EUT       | AX6600 WI-FI 6 三頻電競路由器                               | Date of Test         | 2020-05-16      |
| Factor    | BBHA 9120D                                           | Temp. / Humidity     | 17°C/51%        |
| Polarity  | Vertical                                             | Site / Test Engineer | AC1 / Kevin Ker |
| Test Mode | Transmit by 802.11g at channel 2417MHz<br>(CDD Mode) | Test Voltage         | 110V/60Hz       |

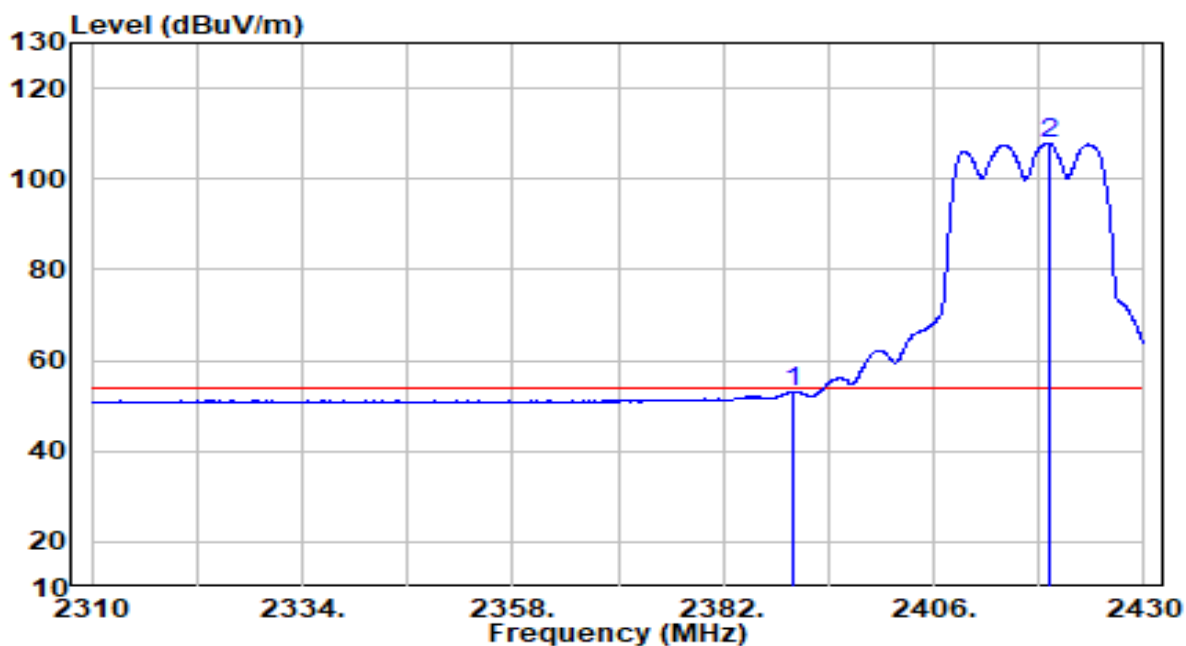


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | 2390.000        | 20.71          | 32.30    | 53.00                | -1.00       | 54.00          | Peak              |
| 2  | * 2419.080      | 75.42          | 32.42    | 107.85               | N/A         | N/A            | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                      |                      |                 |
|-----------|------------------------------------------------------|----------------------|-----------------|
| EUT       | AX6600 WI-FI 6 三頻電競路由器                               | Date of Test         | 2020-05-16      |
| Factor    | BBHA 9120D                                           | Temp. / Humidity     | 17°C/51%        |
| Polarity  | Vertical                                             | Site / Test Engineer | AC1 / Kevin Ker |
| Test Mode | Transmit by 802.11g at channel 2417MHz<br>(CDD Mode) | Test Voltage         | 110V/60Hz       |

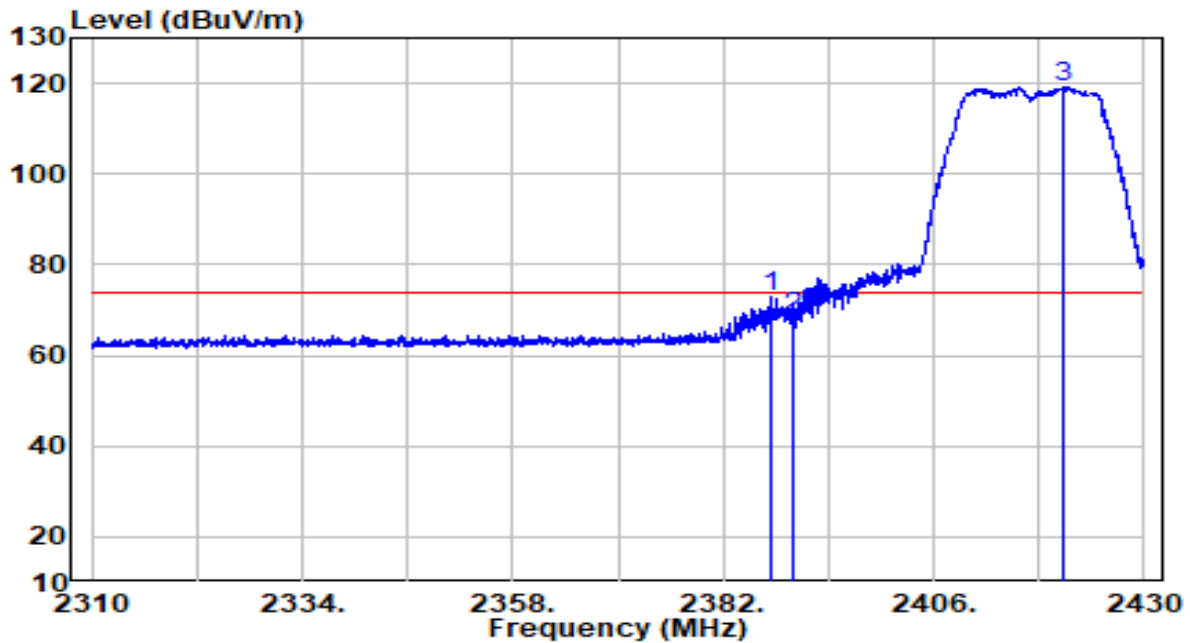


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | 2387.520        | 40.46          | 32.29    | 72.75                | -1.25       | 74.00          | Peak              |
| 2  | 2390.000        | 35.97          | 32.30    | 68.26                | -5.74       | 74.00          | Peak              |
| 3  | * 2420.760      | 86.71          | 32.43    | 119.14               | N/A         | N/A            | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                      |                      |                 |
|-----------|------------------------------------------------------|----------------------|-----------------|
| EUT       | AX6600 WI-FI 6 三頻電競路由器                               | Date of Test         | 2020-05-16      |
| Factor    | BBHA 9120D                                           | Temp. / Humidity     | 17°C/51%        |
| Polarity  | Horizontal                                           | Site / Test Engineer | AC1 / Kevin Ker |
| Test Mode | Transmit by 802.11g at channel 2437MHz<br>(CDD Mode) | Test Voltage         | 110V/60Hz       |

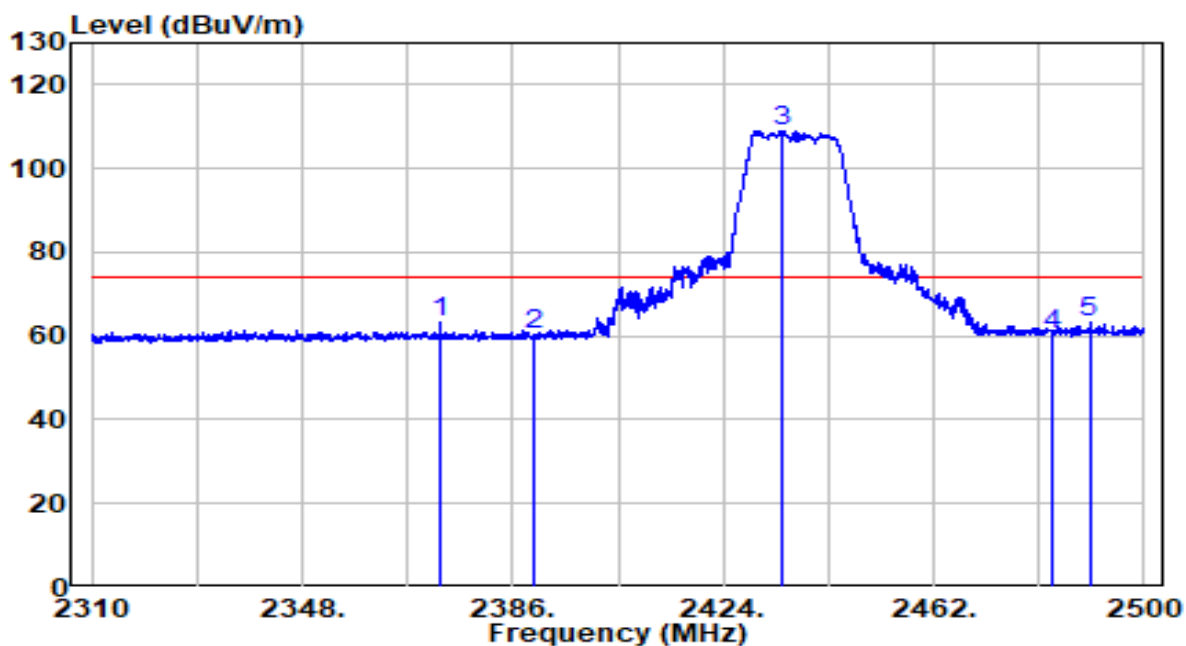


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | 2372.985        | 31.06          | 32.22    | 63.28                | -10.72      | 74.00          | Peak              |
| 2  | 2390.000        | 27.82          | 32.30    | 60.12                | -13.88      | 74.00          | Peak              |
| 3  | * 2434.735      | 76.58          | 32.49    | 109.07               | N/A         | N/A            | Peak              |
| 4  | 2483.500        | 27.68          | 32.71    | 60.39                | -13.61      | 74.00          | Peak              |
| 5  | 2490.120        | 30.43          | 32.74    | 63.17                | -10.83      | 74.00          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                      |                      |                 |
|-----------|------------------------------------------------------|----------------------|-----------------|
| EUT       | AX6600 WI-FI 6 三頻電競路由器                               | Date of Test         | 2020-05-16      |
| Factor    | BBHA 9120D                                           | Temp. / Humidity     | 17°C/51%        |
| Polarity  | Horizontal                                           | Site / Test Engineer | AC1 / Kevin Ker |
| Test Mode | Transmit by 802.11g at channel 2437MHz<br>(CDD Mode) | Test Voltage         | 110V/60Hz       |

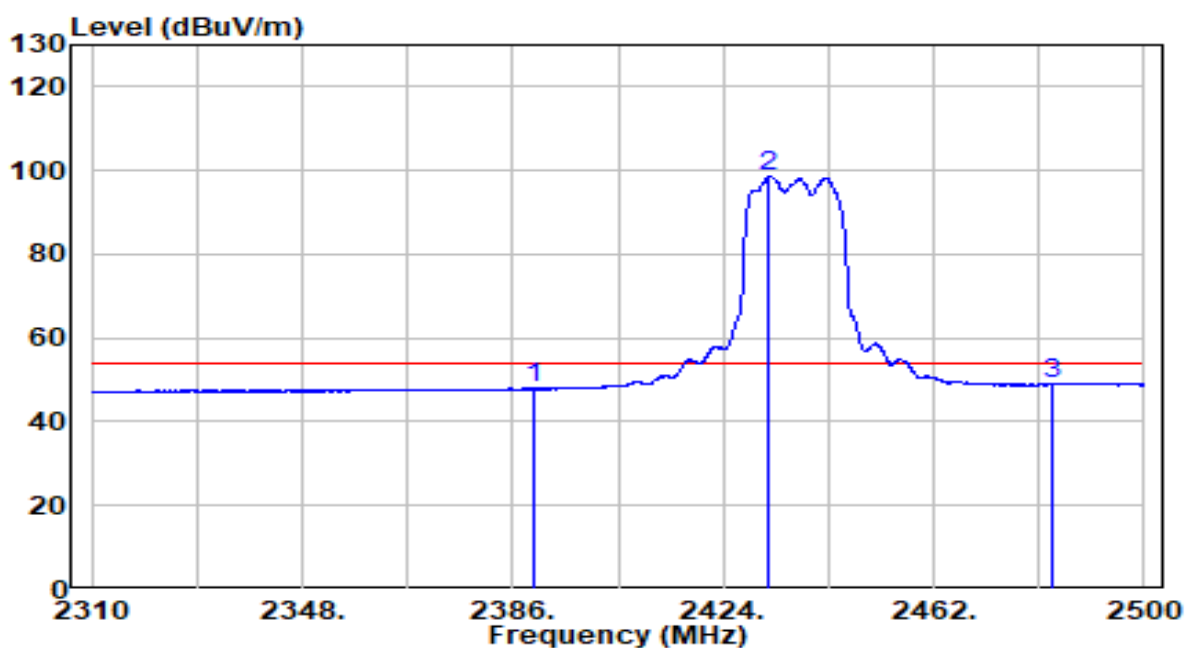


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | 2390.000        | 15.69          | 32.30    | 47.99                | -6.01       | 54.00          | Peak              |
| 2  | * 2432.360      | 66.25          | 32.48    | 98.73                | N/A         | N/A            | Peak              |
| 3  | 2483.500        | 16.18          | 32.71    | 48.89                | -5.11       | 54.00          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                      |                      |                 |
|-----------|------------------------------------------------------|----------------------|-----------------|
| EUT       | AX6600 WI-FI 6 三頻電競路由器                               | Date of Test         | 2020-05-16      |
| Factor    | BBHA 9120D                                           | Temp. / Humidity     | 17°C/51%        |
| Polarity  | Vertical                                             | Site / Test Engineer | AC1 / Kevin Ker |
| Test Mode | Transmit by 802.11g at channel 2437MHz<br>(CDD Mode) | Test Voltage         | 110V/60Hz       |

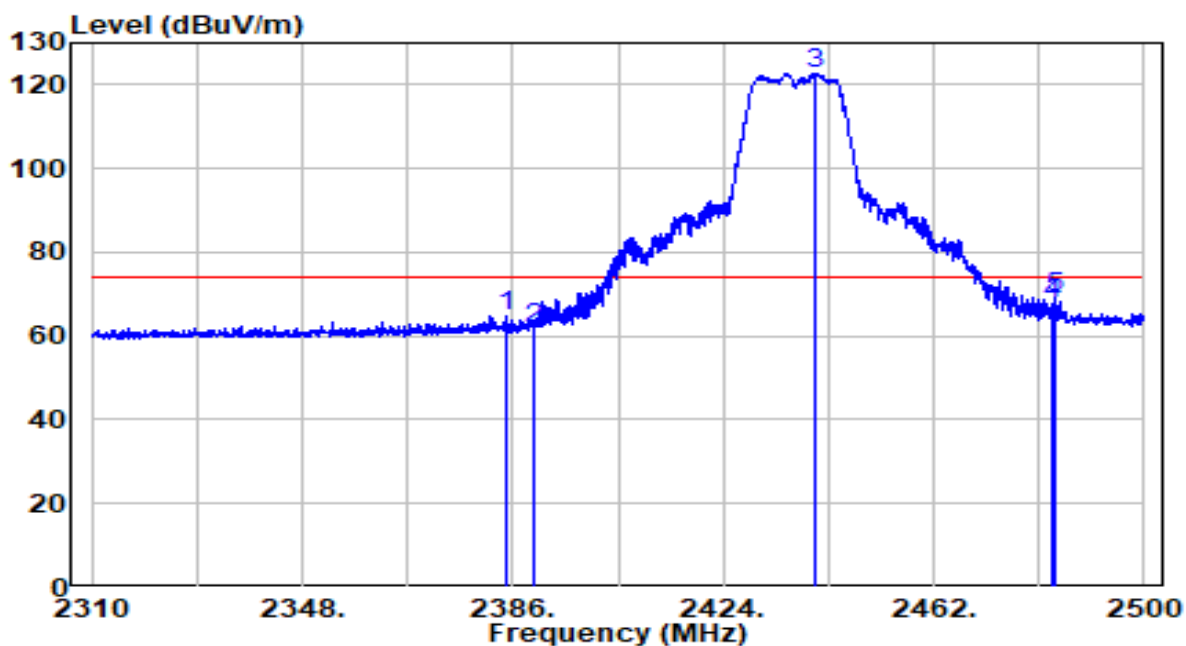


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | 2384.860        | 32.35          | 32.27    | 64.62                | -9.38       | 74.00          | Peak              |
| 2  | 2390.000        | 29.74          | 32.30    | 62.04                | -11.96      | 74.00          | Peak              |
| 3  | * 2440.625      | 90.26          | 32.52    | 122.77               | N/A         | N/A            | Peak              |
| 4  | 2483.500        | 34.90          | 32.71    | 67.61                | -6.39       | 74.00          | Peak              |
| 5  | 2483.945        | 36.25          | 32.71    | 68.96                | -5.04       | 74.00          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                      |                      |                 |
|-----------|------------------------------------------------------|----------------------|-----------------|
| EUT       | AX6600 WI-FI 6 三頻電競路由器                               | Date of Test         | 2020-05-16      |
| Factor    | BBHA 9120D                                           | Temp. / Humidity     | 17°C/51%        |
| Polarity  | Vertical                                             | Site / Test Engineer | AC1 / Kevin Ker |
| Test Mode | Transmit by 802.11g at channel 2437MHz<br>(CDD Mode) | Test Voltage         | 110V/60Hz       |

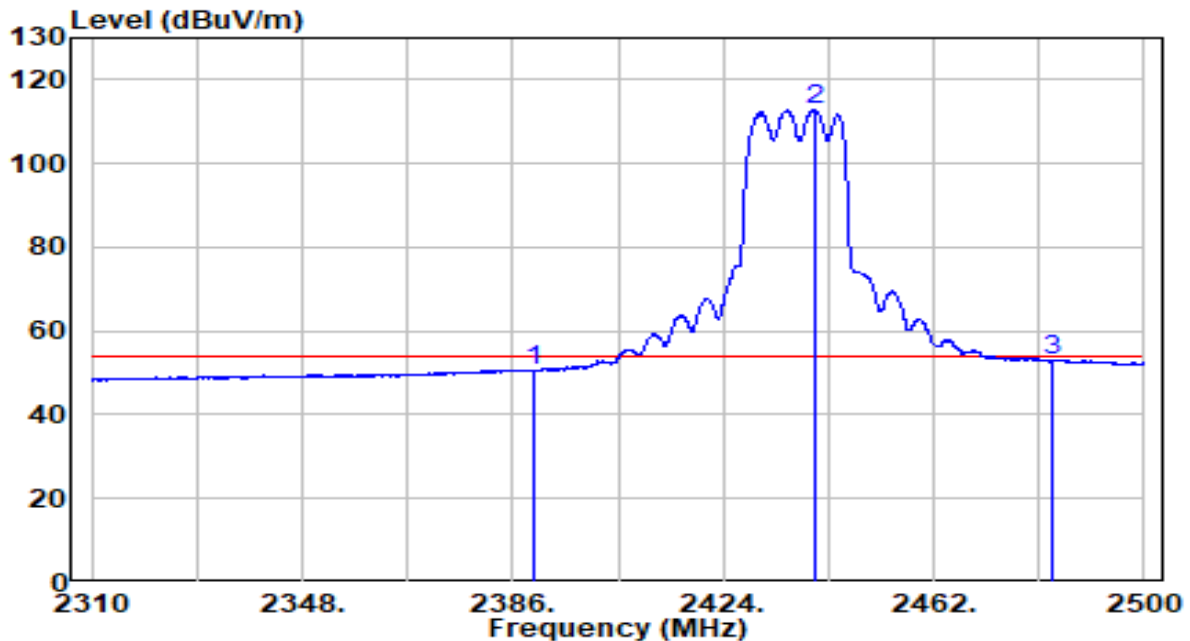


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | 2390.000        | 18.29          | 32.30    | 50.59                | -3.41       | 54.00          | Peak              |
| 2  | * 2440.435      | 80.21          | 32.52    | 112.72               | N/A         | N/A            | Peak              |
| 3  | 2483.500        | 20.18          | 32.71    | 52.89                | -1.11       | 54.00          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                      |                      |                 |
|-----------|------------------------------------------------------|----------------------|-----------------|
| EUT       | AX6600 WI-FI 6 三頻電競路由器                               | Date of Test         | 2020-05-16      |
| Factor    | BBHA 9120D                                           | Temp. / Humidity     | 17°C/51%        |
| Polarity  | Horizontal                                           | Site / Test Engineer | AC1 / Kevin Ker |
| Test Mode | Transmit by 802.11g at channel 2457MHz<br>(CDD Mode) | Test Voltage         | 110V/60Hz       |

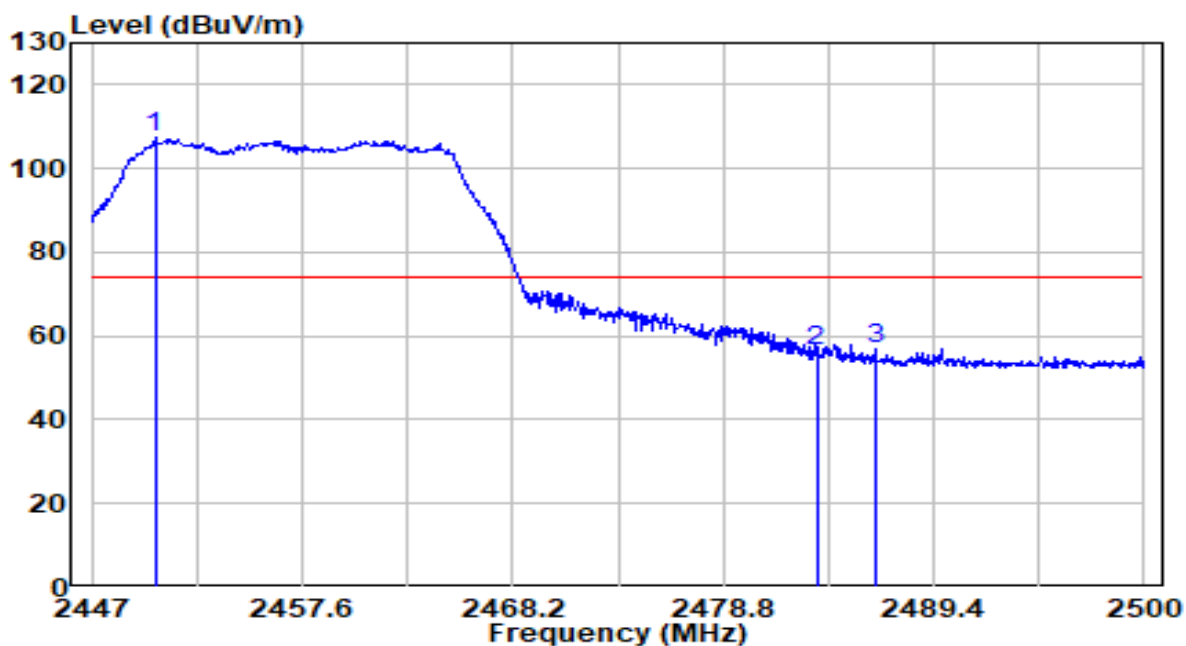


| No |   | Frequency<br>(MHz) | Reading<br>(dBUV) | C.F<br>(dB) | Measurement<br>(dBUV/m) | Margin<br>(dB) | Limit<br>(dBUV/m) | Remark<br>(QP/PK/AV) |
|----|---|--------------------|-------------------|-------------|-------------------------|----------------|-------------------|----------------------|
| 1  | * | 2450.180           | 74.81             | 32.56       | 107.37                  | N/A            | N/A               | Peak                 |
| 2  |   | 2483.500           | 23.88             | 32.71       | 56.59                   | -17.41         | 74.00             | Peak                 |
| 3  |   | 2486.485           | 24.32             | 32.72       | 57.04                   | -16.96         | 74.00             | Peak                 |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                      |                      |                 |
|-----------|------------------------------------------------------|----------------------|-----------------|
| EUT       | AX6600 WI-FI 6 三頻電競路由器                               | Date of Test         | 2020-05-16      |
| Factor    | BBHA 9120D                                           | Temp. / Humidity     | 17°C/51%        |
| Polarity  | Horizontal                                           | Site / Test Engineer | AC1 / Kevin Ker |
| Test Mode | Transmit by 802.11g at channel 2457MHz<br>(CDD Mode) | Test Voltage         | 110V/60Hz       |

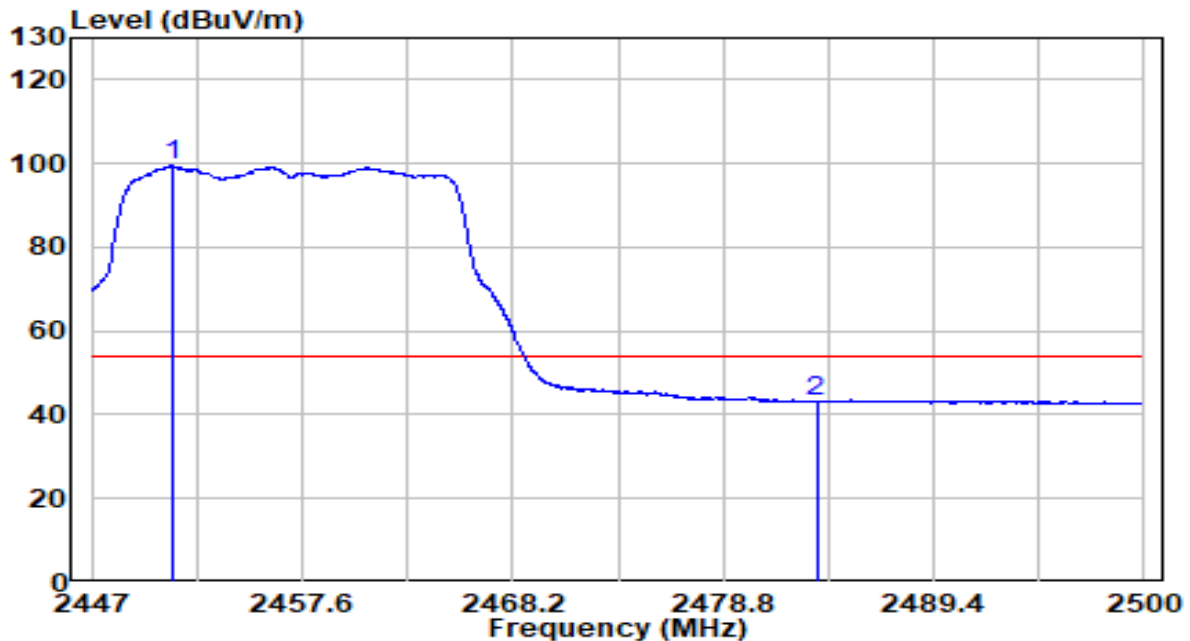


| No |   | Frequency<br>(MHz) | Reading<br>(dBuV) | C.F<br>(dB) | Measurement<br>(dBuV/m) | Margin<br>(dB) | Limit<br>(dBuV/m) | Remark<br>(QP/PK/AV) |
|----|---|--------------------|-------------------|-------------|-------------------------|----------------|-------------------|----------------------|
| 1  | * | 2451.028           | 66.82             | 32.56       | 99.38                   | N/A            | N/A               | Average              |
| 2  |   | 2483.500           | 10.49             | 32.71       | 43.20                   | -10.80         | 54.00             | Average              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                      |                      |                 |
|-----------|------------------------------------------------------|----------------------|-----------------|
| EUT       | AX6600 WI-FI 6 三頻電競路由器                               | Date of Test         | 2020-05-16      |
| Factor    | BBHA 9120D                                           | Temp. / Humidity     | 17°C/51%        |
| Polarity  | Vertical                                             | Site / Test Engineer | AC1 / Kevin Ker |
| Test Mode | Transmit by 802.11g at channel 2457MHz<br>(CDD Mode) | Test Voltage         | 110V/60Hz       |

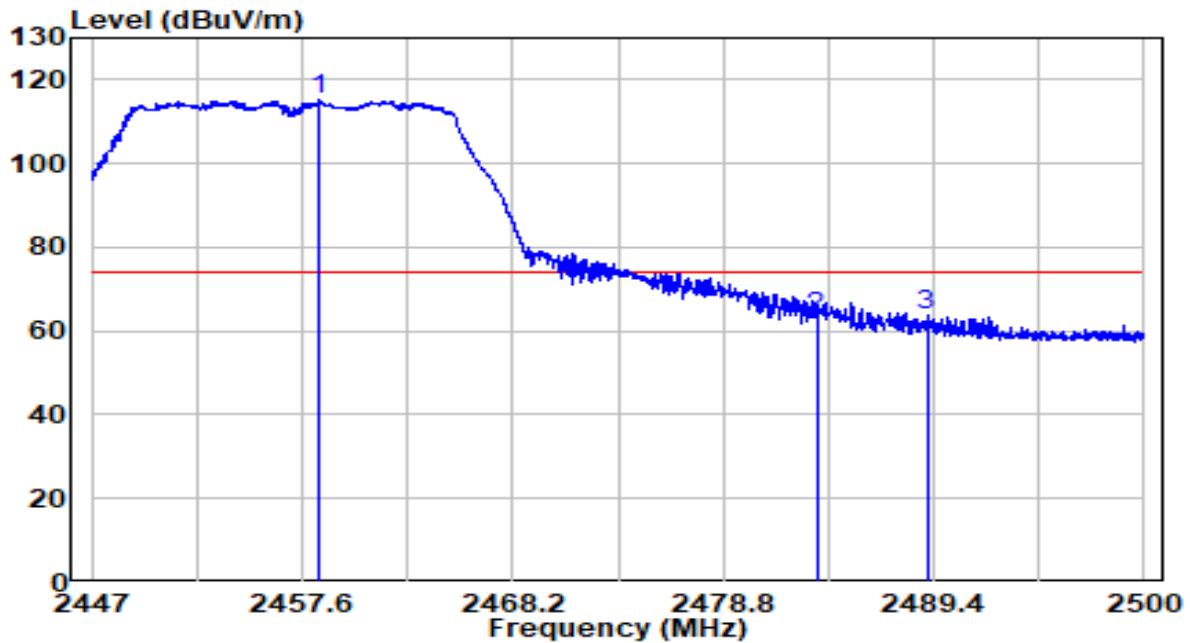


| No |   | Frequency<br>(MHz) | Reading<br>(dBuV) | C.F<br>(dB) | Measurement<br>(dBuV/m) | Margin<br>(dB) | Limit<br>(dBuV/m) | Remark<br>(QP/PK/AV) |
|----|---|--------------------|-------------------|-------------|-------------------------|----------------|-------------------|----------------------|
| 1  | * | 2458.475           | 82.55             | 32.60       | 115.15                  | N/A            | N/A               | Peak                 |
| 2  |   | 2483.500           | 30.62             | 32.71       | 63.32                   | -10.68         | 74.00             | Peak                 |
| 3  |   | 2489.055           | 30.95             | 32.73       | 63.69                   | -10.31         | 74.00             | Peak                 |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                      |                      |                 |
|-----------|------------------------------------------------------|----------------------|-----------------|
| EUT       | AX6600 WI-FI 6 三頻電競路由器                               | Date of Test         | 2020-05-16      |
| Factor    | BBHA 9120D                                           | Temp. / Humidity     | 17°C/51%        |
| Polarity  | Vertical                                             | Site / Test Engineer | AC1 / Kevin Ker |
| Test Mode | Transmit by 802.11g at channel 2457MHz<br>(CDD Mode) | Test Voltage         | 110V/60Hz       |

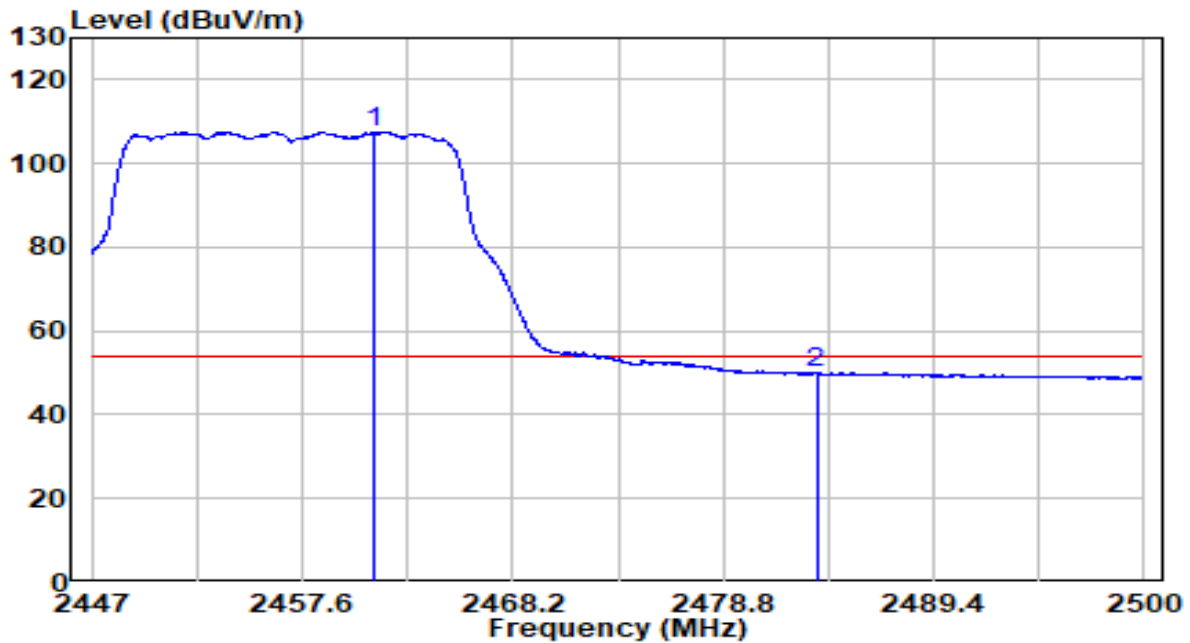


| No |   | Frequency<br>(MHz) | Reading<br>(dBuV) | C.F<br>(dB) | Measurement<br>(dBuV/m) | Margin<br>(dB) | Limit<br>(dBuV/m) | Remark<br>(QP/PK/AV) |
|----|---|--------------------|-------------------|-------------|-------------------------|----------------|-------------------|----------------------|
| 1  | * | 2461.230           | 75.03             | 32.61       | 107.64                  | N/A            | N/A               | Average              |
| 2  |   | 2483.500           | 17.21             | 32.71       | 49.92                   | -4.08          | 54.00             | Average              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                      |                      |                 |
|-----------|------------------------------------------------------|----------------------|-----------------|
| EUT       | AX6600 WI-FI 6 三頻電競路由器                               | Date of Test         | 2020-05-16      |
| Factor    | BBHA 9120D                                           | Temp. / Humidity     | 17°C/51%        |
| Polarity  | Horizontal                                           | Site / Test Engineer | AC1 / Kevin Ker |
| Test Mode | Transmit by 802.11g at channel 2462MHz<br>(CDD Mode) | Test Voltage         | 110V/60Hz       |

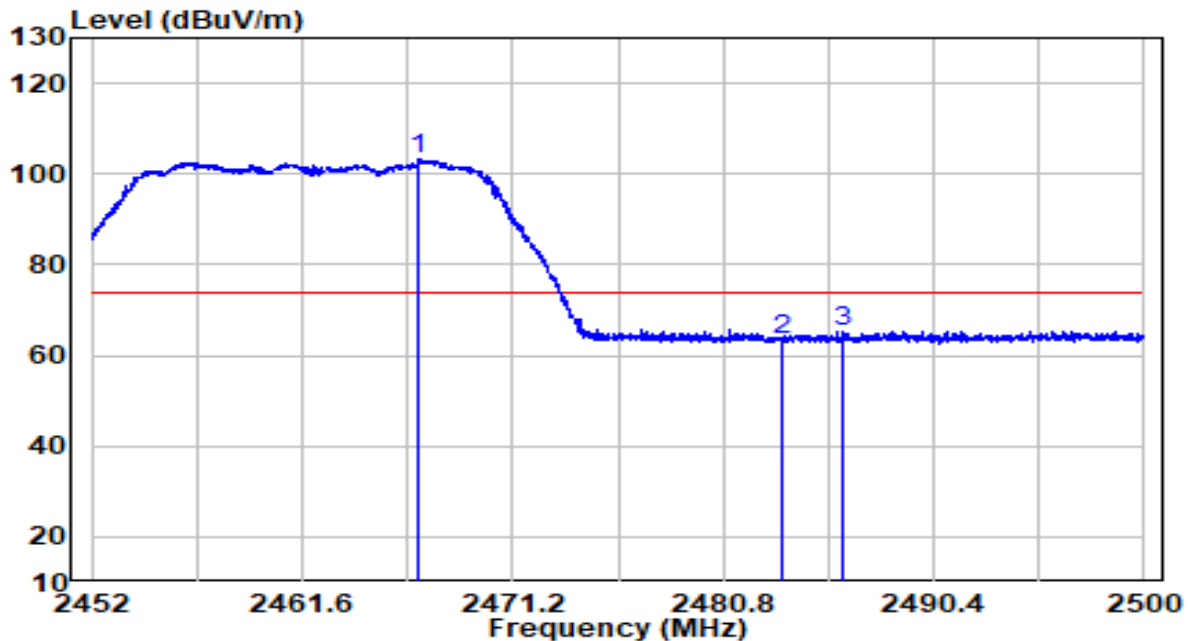


| No |   | Frequency<br>(MHz) | Reading<br>(dBuV) | C.F<br>(dB) | Measurement<br>(dBuV/m) | Margin<br>(dB) | Limit<br>(dBuV/m) | Remark<br>(QP/PK/AV) |
|----|---|--------------------|-------------------|-------------|-------------------------|----------------|-------------------|----------------------|
| 1  | * | 2466.880           | 70.67             | 32.63       | 103.31                  | N/A            | N/A               | Peak                 |
| 2  |   | 2483.500           | 30.67             | 32.71       | 63.38                   | -10.62         | 74.00             | Peak                 |
| 3  |   | 2486.296           | 32.74             | 32.72       | 65.46                   | -8.54          | 74.00             | Peak                 |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                      |                      |                 |
|-----------|------------------------------------------------------|----------------------|-----------------|
| EUT       | AX6600 WI-FI 6 三頻電競路由器                               | Date of Test         | 2020-05-16      |
| Factor    | BBHA 9120D                                           | Temp. / Humidity     | 17°C/51%        |
| Polarity  | Horizontal                                           | Site / Test Engineer | AC1 / Kevin Ker |
| Test Mode | Transmit by 802.11g at channel 2462MHz<br>(CDD Mode) | Test Voltage         | 110V/60Hz       |

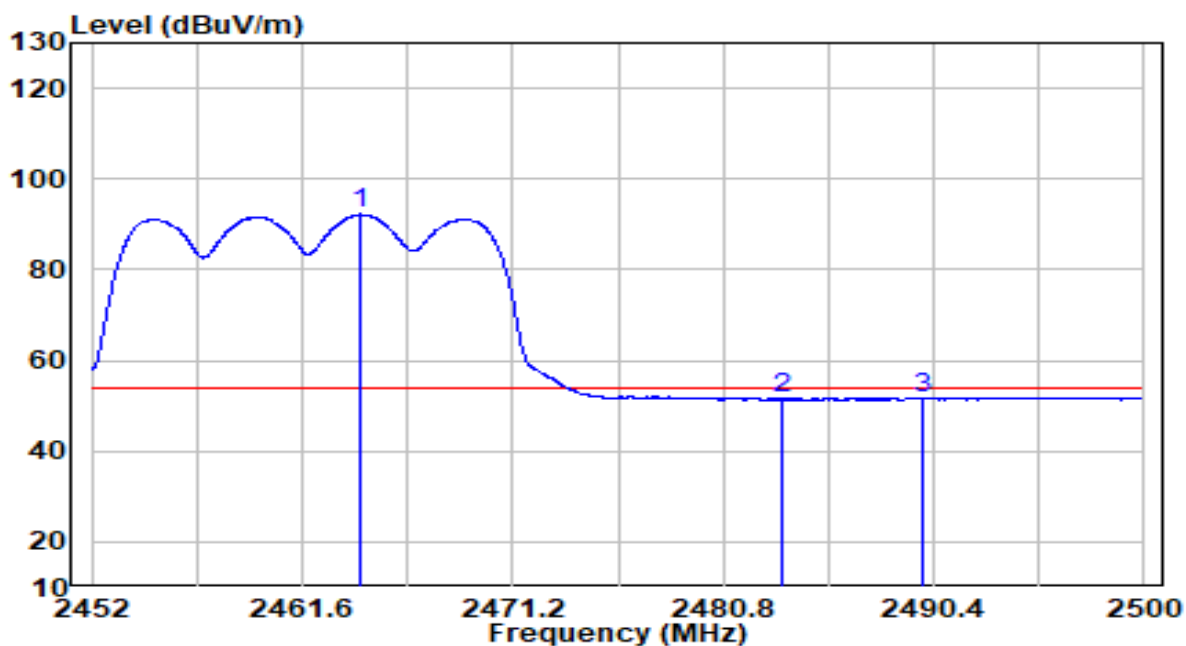


| No |   | Frequency<br>(MHz) | Reading<br>(dBuV) | C.F<br>(dB) | Measurement<br>(dBuV/m) | Margin<br>(dB) | Limit<br>(dBuV/m) | Remark<br>(QP/PK/AV) |
|----|---|--------------------|-------------------|-------------|-------------------------|----------------|-------------------|----------------------|
| 1  | * | 2464.288           | 59.58             | 32.62       | 92.20                   | N/A            | N/A               | Peak                 |
| 2  |   | 2483.500           | 18.82             | 32.71       | 51.52                   | -2.48          | 54.00             | Peak                 |
| 3  |   | 2489.848           | 19.11             | 32.74       | 51.85                   | -2.15          | 54.00             | Peak                 |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                      |                      |                 |
|-----------|------------------------------------------------------|----------------------|-----------------|
| EUT       | AX6600 WI-FI 6 三頻電競路由器                               | Date of Test         | 2020-05-16      |
| Factor    | BBHA 9120D                                           | Temp. / Humidity     | 17°C/51%        |
| Polarity  | Vertical                                             | Site / Test Engineer | AC1 / Kevin Ker |
| Test Mode | Transmit by 802.11g at channel 2462MHz<br>(CDD Mode) | Test Voltage         | 110V/60Hz       |

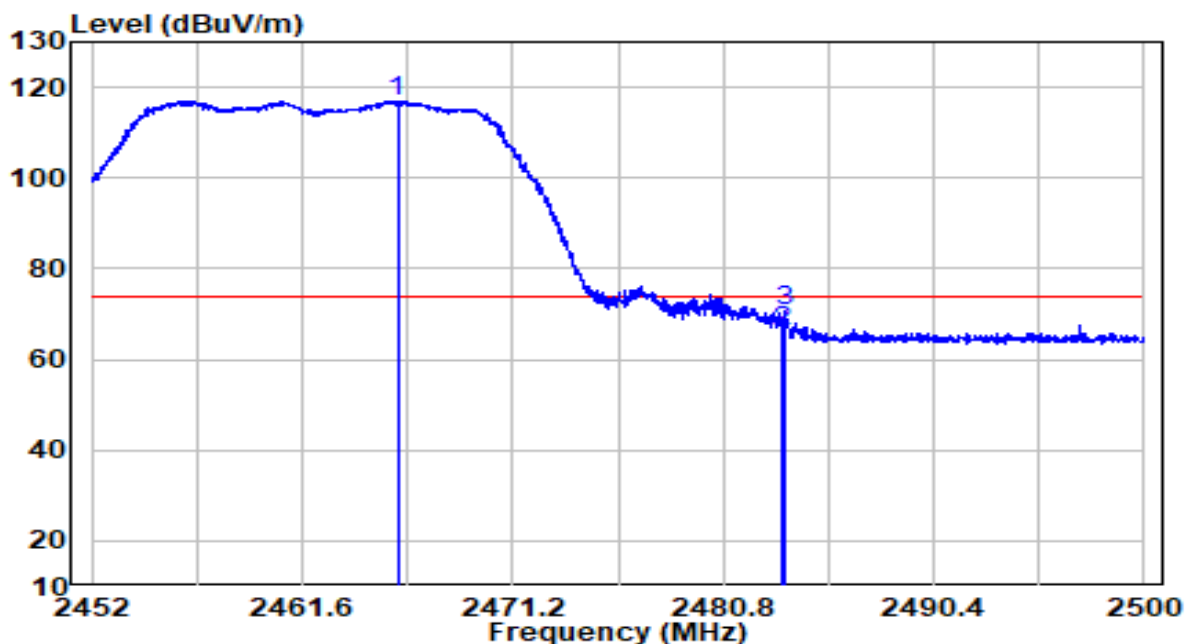


| No |   | Frequency<br>(MHz) | Reading<br>(dBuV) | C.F<br>(dB) | Measurement<br>(dBuV/m) | Margin<br>(dB) | Limit<br>(dBuV/m) | Remark<br>(QP/PK/AV) |
|----|---|--------------------|-------------------|-------------|-------------------------|----------------|-------------------|----------------------|
| 1  | * | 2465.944           | 84.28             | 32.63       | 116.91                  | N/A            | N/A               | Peak                 |
| 2  |   | 2483.500           | 33.54             | 32.71       | 66.25                   | -7.75          | 74.00             | Peak                 |
| 3  |   | 2483.560           | 37.80             | 32.71       | 70.51                   | -3.49          | 74.00             | Peak                 |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                      |                      |                 |
|-----------|------------------------------------------------------|----------------------|-----------------|
| EUT       | AX6600 WI-FI 6 三頻電競路由器                               | Date of Test         | 2020-05-16      |
| Factor    | BBHA 9120D                                           | Temp. / Humidity     | 17°C/51%        |
| Polarity  | Vertical                                             | Site / Test Engineer | AC1 / Kevin Ker |
| Test Mode | Transmit by 802.11g at channel 2462MHz<br>(CDD Mode) | Test Voltage         | 110V/60Hz       |

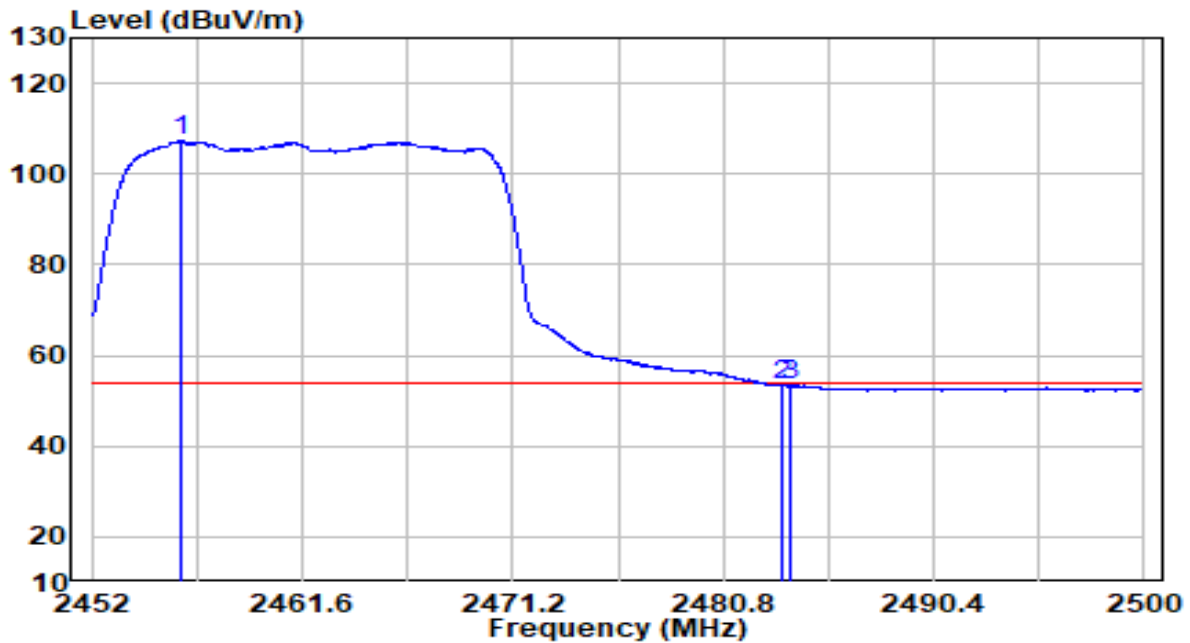


| No |   | Frequency<br>(MHz) | Reading<br>(dBuV) | C.F<br>(dB) | Measurement<br>(dBuV/m) | Margin<br>(dB) | Limit<br>(dBuV/m) | Remark<br>(QP/PK/AV) |
|----|---|--------------------|-------------------|-------------|-------------------------|----------------|-------------------|----------------------|
| 1  | * | 2456.104           | 74.59             | 32.59       | 107.18                  | N/A            | N/A               | Peak                 |
| 2  |   | 2483.500           | 20.79             | 32.71       | 53.50                   | -0.50          | 54.00             | Peak                 |
| 3  |   | 2483.920           | 20.85             | 32.71       | 53.56                   | -0.44          | 54.00             | Peak                 |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                        |                      |                 |
|-----------|--------------------------------------------------------|----------------------|-----------------|
| EUT       | AX6600 WI-FI 6 三頻電競路由器                                 | Date of Test         | 2020-05-16      |
| Factor    | BBHA 9120D                                             | Temp. / Humidity     | 17°C/51%        |
| Polarity  | Horizontal                                             | Site / Test Engineer | AC1 / Kevin Ker |
| Test Mode | Transmit by 802.11n-HT20 at channel 2412MHz (CDD Mode) | Test Voltage         | 110V/60Hz       |

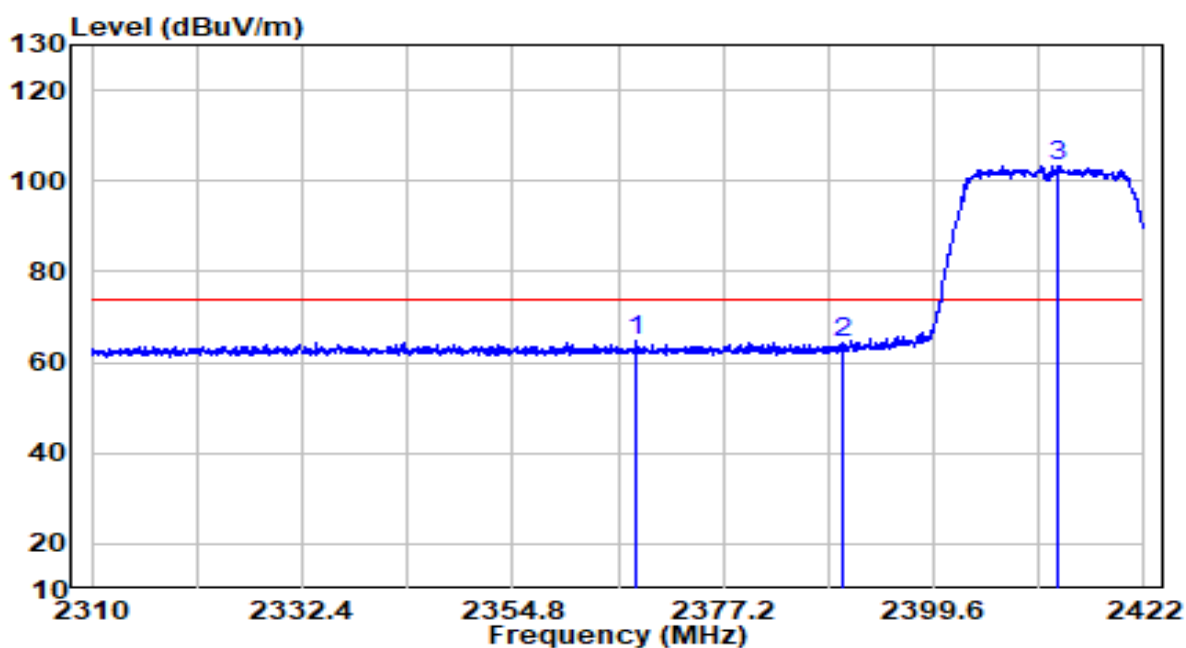


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | 2368.016        | 32.39          | 32.20    | 64.59                | -9.41       | 74.00          | Peak              |
| 2  | 2390.000        | 31.96          | 32.30    | 64.25                | -9.75       | 74.00          | Peak              |
| 3  | * 2412.816      | 70.89          | 32.40    | 103.29               | N/A         | N/A            | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                        |                      |                 |
|-----------|--------------------------------------------------------|----------------------|-----------------|
| EUT       | AX6600 WI-FI 6 三頻電競路由器                                 | Date of Test         | 2020-05-16      |
| Factor    | BBHA 9120D                                             | Temp. / Humidity     | 17°C/51%        |
| Polarity  | Horizontal                                             | Site / Test Engineer | AC1 / Kevin Ker |
| Test Mode | Transmit by 802.11n-HT20 at channel 2412MHz (CDD Mode) | Test Voltage         | 110V/60Hz       |

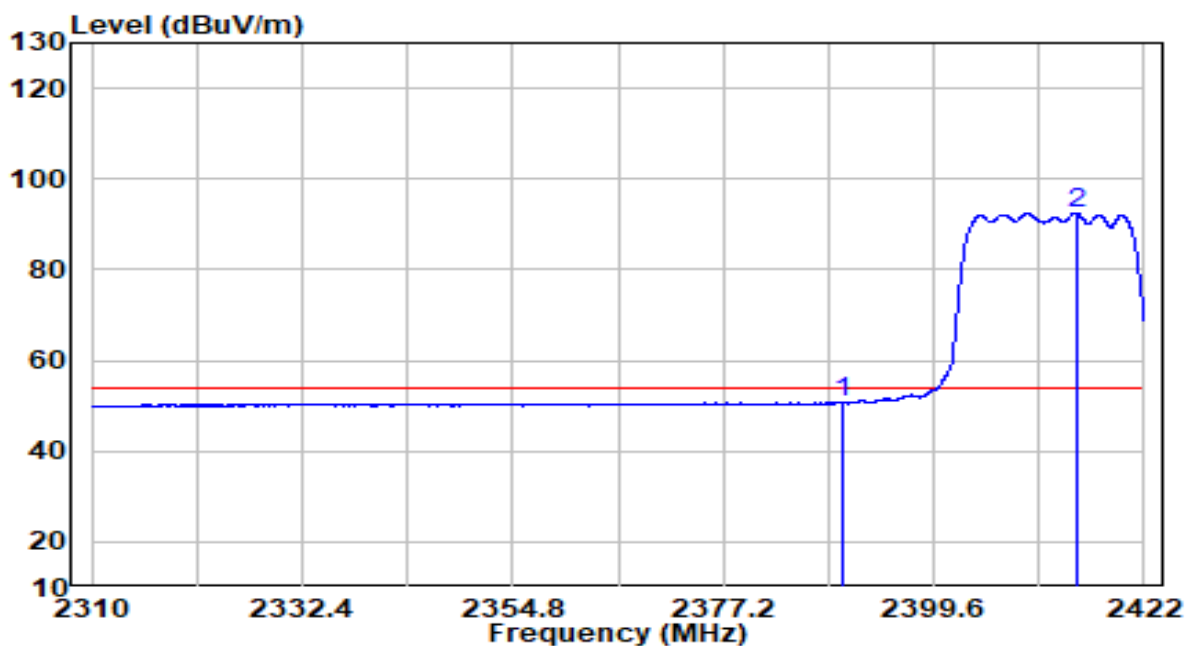


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | 2390.000        | 18.43          | 32.30    | 50.72                | -3.28       | 54.00          | Peak              |
| 2  | * 2414.720      | 60.18          | 32.40    | 92.58                | N/A         | N/A            | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                        |                      |                 |
|-----------|--------------------------------------------------------|----------------------|-----------------|
| EUT       | AX6600 WI-FI 6 三頻電競路由器                                 | Date of Test         | 2020-05-16      |
| Factor    | BBHA 9120D                                             | Temp. / Humidity     | 17°C/51%        |
| Polarity  | Vertical                                               | Site / Test Engineer | AC1 / Kevin Ker |
| Test Mode | Transmit by 802.11n-HT20 at channel 2412MHz (CDD Mode) | Test Voltage         | 110V/60Hz       |

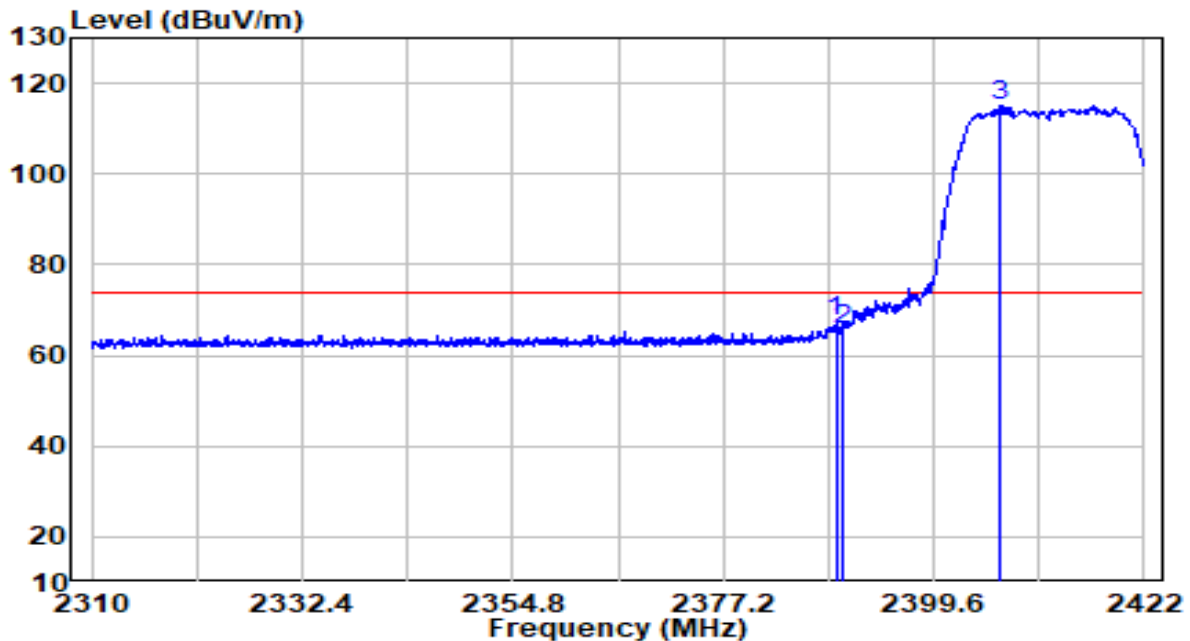


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | 2389.184        | 35.19          | 32.29    | 67.48                | -6.52       | 74.00          | Peak              |
| 2  | 2390.000        | 33.35          | 32.30    | 65.65                | -8.35       | 74.00          | Peak              |
| 3  | * 2406.712      | 82.88          | 32.37    | 115.25               | N/A         | N/A            | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                        |                      |                 |
|-----------|--------------------------------------------------------|----------------------|-----------------|
| EUT       | AX6600 WI-FI 6 三頻電競路由器                                 | Date of Test         | 2020-05-16      |
| Factor    | BBHA 9120D                                             | Temp. / Humidity     | 17°C/51%        |
| Polarity  | Vertical                                               | Site / Test Engineer | AC1 / Kevin Ker |
| Test Mode | Transmit by 802.11n-HT20 at channel 2412MHz (CDD Mode) | Test Voltage         | 110V/60Hz       |

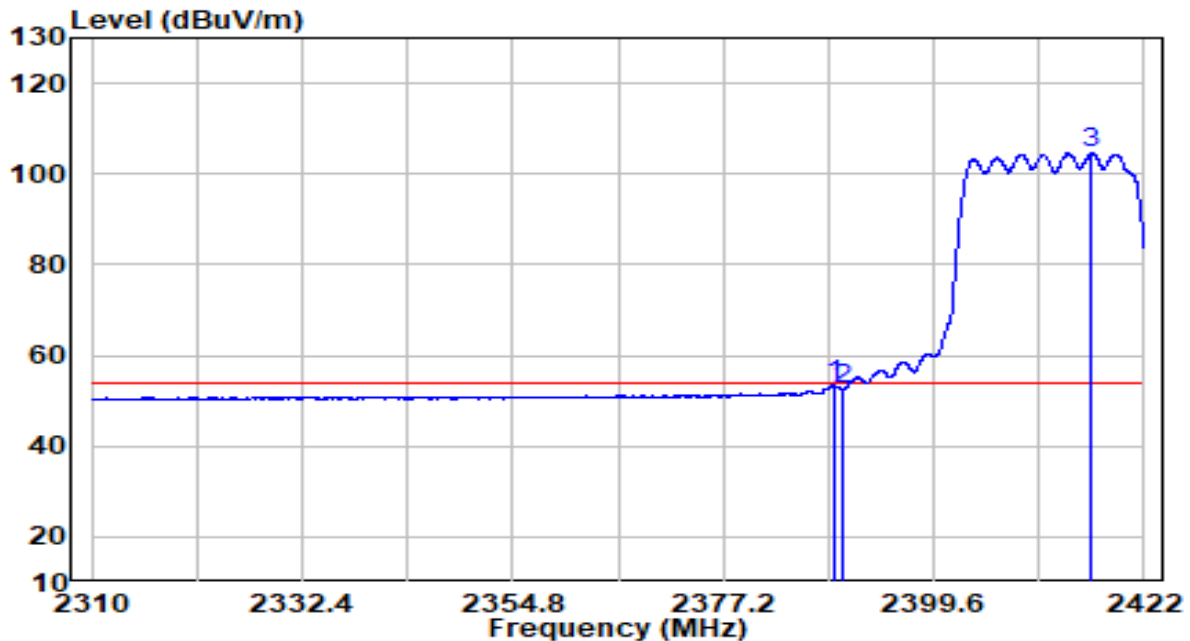


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | 2389.016        | 21.19          | 32.29    | 53.48                | -0.52       | 54.00          | Peak              |
| 2  | 2390.000        | 20.33          | 32.30    | 52.63                | -1.37       | 54.00          | Peak              |
| 3  | * 2416.456      | 72.16          | 32.41    | 104.58               | N/A         | N/A            | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                        |                      |                 |
|-----------|--------------------------------------------------------|----------------------|-----------------|
| EUT       | AX6600 WI-FI 6 三頻電競路由器                                 | Date of Test         | 2020-05-16      |
| Factor    | BBHA 9120D                                             | Temp. / Humidity     | 17°C/51%        |
| Polarity  | Horizontal                                             | Site / Test Engineer | AC1 / Kevin Ker |
| Test Mode | Transmit by 802.11n-HT20 at channel 2417MHz (CDD Mode) | Test Voltage         | 110V/60Hz       |

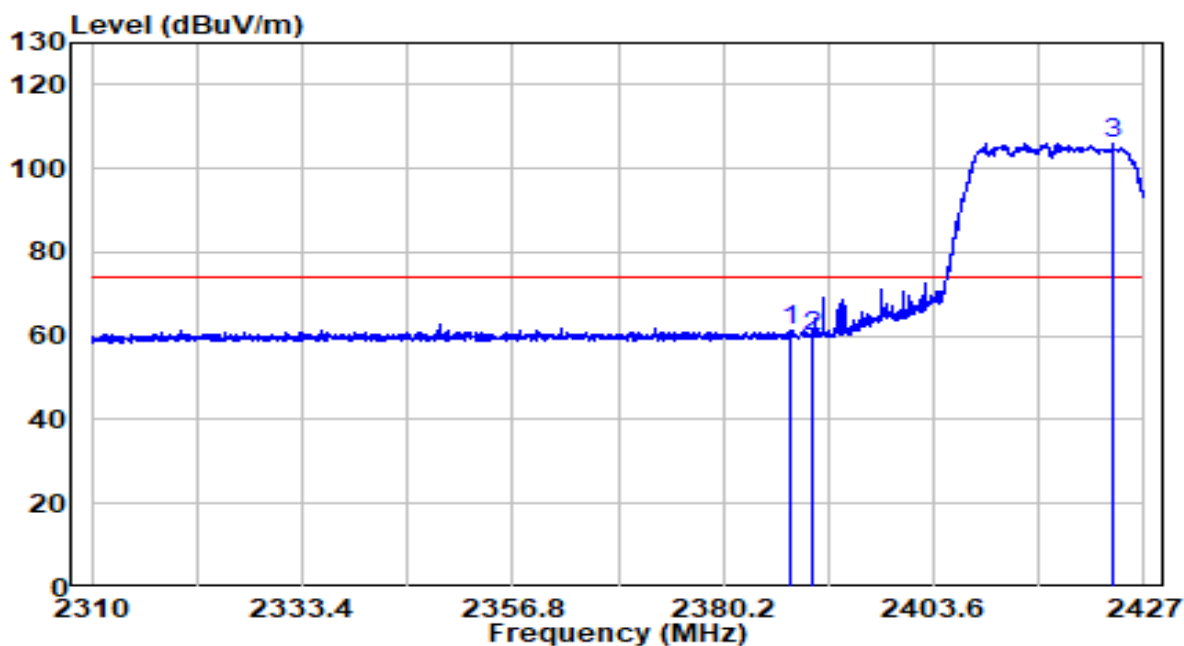


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | 2387.629        | 29.11          | 32.29    | 61.40                | -12.60      | 74.00          | Peak              |
| 2  | 2390.000        | 27.41          | 32.30    | 59.70                | -14.30      | 74.00          | Peak              |
| 3  | * 2423.431      | 73.67          | 32.44    | 106.11               | N/A         | N/A            | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                        |                      |                 |
|-----------|--------------------------------------------------------|----------------------|-----------------|
| EUT       | AX6600 WI-FI 6 三頻電競路由器                                 | Date of Test         | 2020-05-16      |
| Factor    | BBHA 9120D                                             | Temp. / Humidity     | 17°C/51%        |
| Polarity  | Horizontal                                             | Site / Test Engineer | AC1 / Kevin Ker |
| Test Mode | Transmit by 802.11n-HT20 at channel 2417MHz (CDD Mode) | Test Voltage         | 110V/60Hz       |

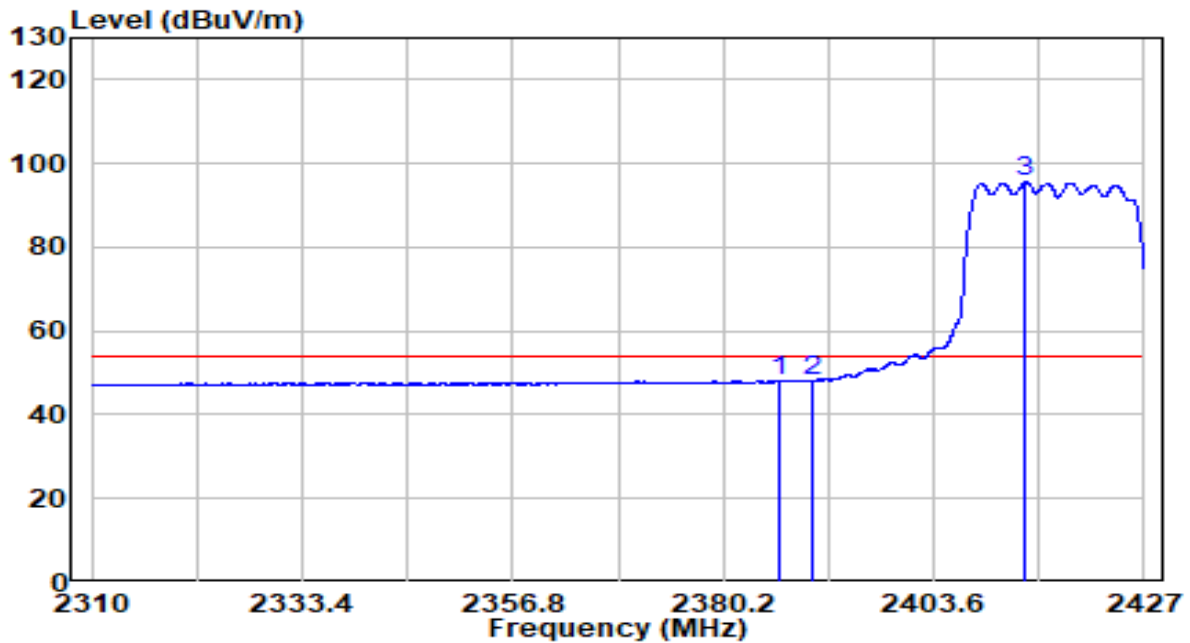


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | 2386.576        | 15.87          | 32.28    | 48.15                | -5.85       | 54.00          | Peak              |
| 2  | 2390.000        | 15.66          | 32.30    | 47.96                | -6.04       | 54.00          | Peak              |
| 3  | * 2413.837      | 63.10          | 32.40    | 95.50                | N/A         | N/A            | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                        |                      |                 |
|-----------|--------------------------------------------------------|----------------------|-----------------|
| EUT       | AX6600 WI-FI 6 三頻電競路由器                                 | Date of Test         | 2020-05-16      |
| Factor    | BBHA 9120D                                             | Temp. / Humidity     | 17°C/51%        |
| Polarity  | Vertical                                               | Site / Test Engineer | AC1 / Kevin Ker |
| Test Mode | Transmit by 802.11n-HT20 at channel 2417MHz (CDD Mode) | Test Voltage         | 110V/60Hz       |

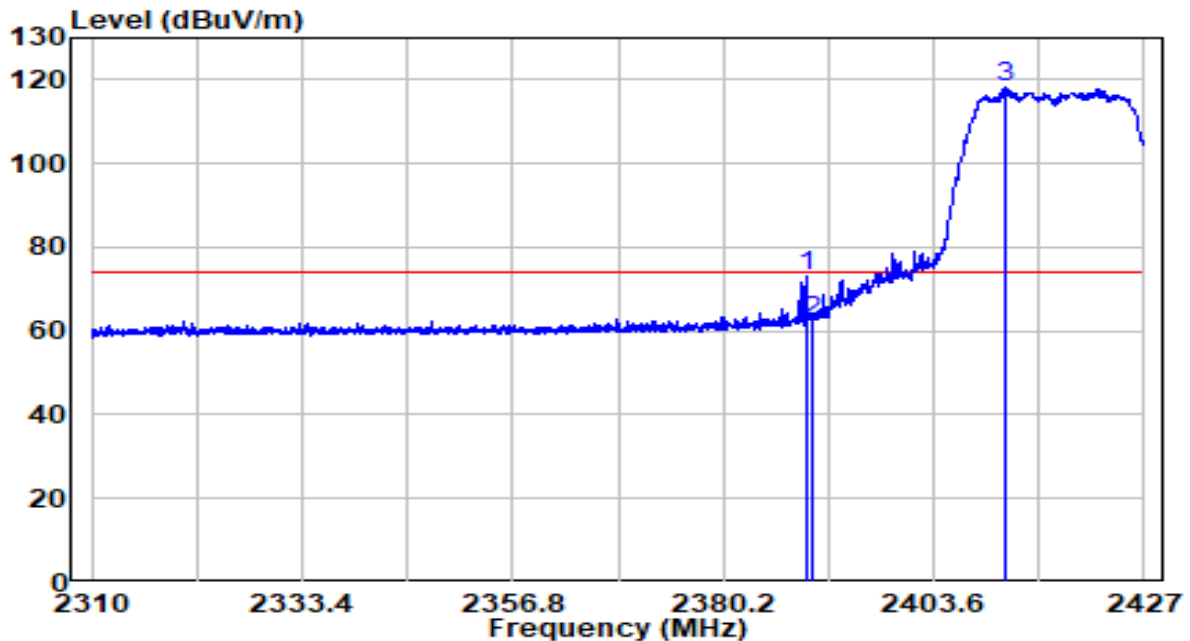


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | 2389.560        | 40.63          | 32.29    | 72.92                | -1.08       | 74.00          | Peak              |
| 2  | 2390.000        | 29.83          | 32.30    | 62.13                | -11.87      | 74.00          | Peak              |
| 3  | * 2411.498      | 85.76          | 32.39    | 118.15               | N/A         | N/A            | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                        |                      |                 |
|-----------|--------------------------------------------------------|----------------------|-----------------|
| EUT       | AX6600 WI-FI 6 三頻電競路由器                                 | Date of Test         | 2020-05-16      |
| Factor    | BBHA 9120D                                             | Temp. / Humidity     | 17°C/51%        |
| Polarity  | Vertical                                               | Site / Test Engineer | AC1 / Kevin Ker |
| Test Mode | Transmit by 802.11n-HT20 at channel 2417MHz (CDD Mode) | Test Voltage         | 110V/60Hz       |

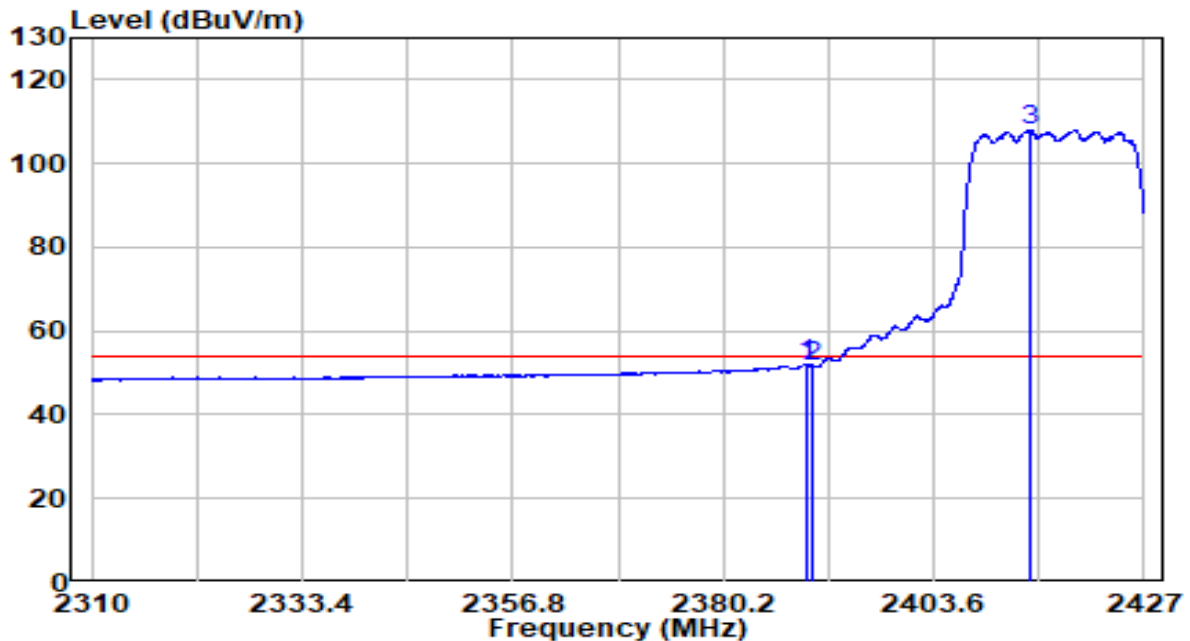


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | 2389.385        | 19.74          | 32.29    | 52.04                | -1.96       | 54.00          | Peak              |
| 2  | 2390.000        | 19.32          | 32.30    | 51.62                | -2.38       | 54.00          | Peak              |
| 3  | * 2414.305      | 75.68          | 32.40    | 108.08               | N/A         | N/A            | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                        |                      |                 |
|-----------|--------------------------------------------------------|----------------------|-----------------|
| EUT       | AX6600 WI-FI 6 三頻電競路由器                                 | Date of Test         | 2020-05-16      |
| Factor    | BBHA 9120D                                             | Temp. / Humidity     | 17°C/51%        |
| Polarity  | Horizontal                                             | Site / Test Engineer | AC1 / Kevin Ker |
| Test Mode | Transmit by 802.11n-HT20 at channel 2422MHz (CDD Mode) | Test Voltage         | 110V/60Hz       |

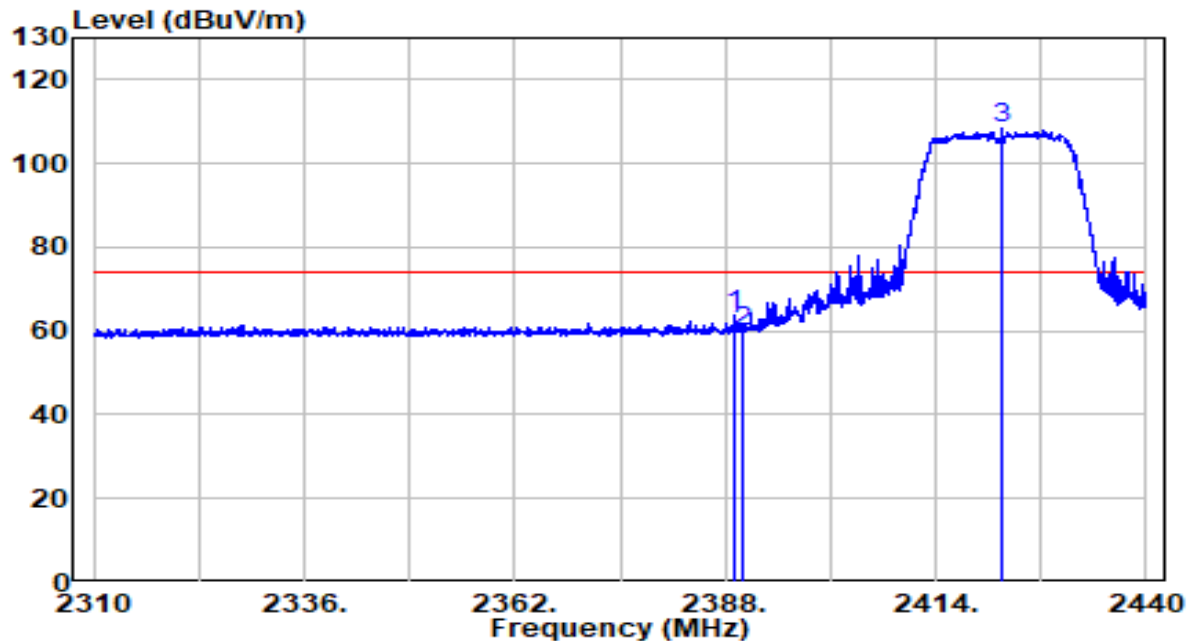


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | 2389.040        | 31.32          | 32.29    | 63.61                | -10.39      | 74.00          | Peak              |
| 2  | 2390.000        | 27.54          | 32.30    | 59.84                | -14.16      | 74.00          | Peak              |
| 3  | * 2422.190      | 75.98          | 32.44    | 108.42               | N/A         | N/A            | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                        |                      |                 |
|-----------|--------------------------------------------------------|----------------------|-----------------|
| EUT       | AX6600 WI-FI 6 三頻電競路由器                                 | Date of Test         | 2020-05-16      |
| Factor    | BBHA 9120D                                             | Temp. / Humidity     | 17°C/51%        |
| Polarity  | Horizontal                                             | Site / Test Engineer | AC1 / Kevin Ker |
| Test Mode | Transmit by 802.11n-HT20 at channel 2422MHz (CDD Mode) | Test Voltage         | 110V/60Hz       |

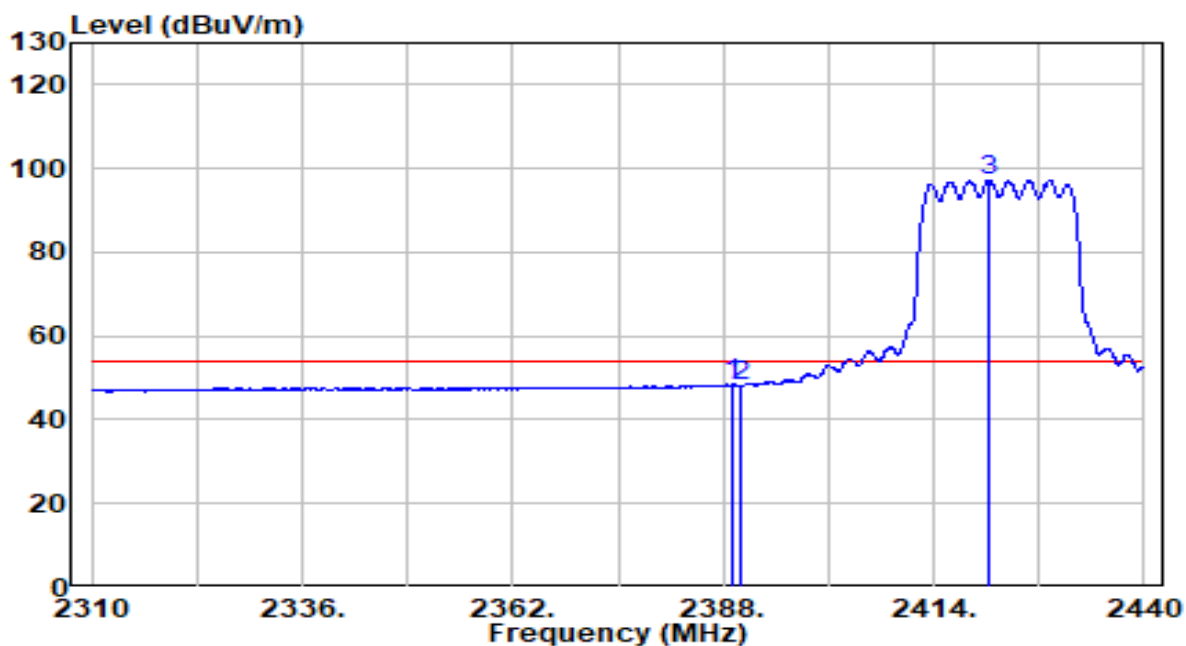


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | 2389.300        | 16.11          | 32.29    | 48.40                | -5.60       | 54.00          | Peak              |
| 2  | 2390.000        | 15.90          | 32.30    | 48.20                | -5.80       | 54.00          | Peak              |
| 3  | * 2420.825      | 64.84          | 32.43    | 97.27                | N/A         | N/A            | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                        |                      |                 |
|-----------|--------------------------------------------------------|----------------------|-----------------|
| EUT       | AX6600 WI-FI 6 三頻電競路由器                                 | Date of Test         | 2020-05-16      |
| Factor    | BBHA 9120D                                             | Temp. / Humidity     | 17°C/51%        |
| Polarity  | Vertical                                               | Site / Test Engineer | AC1 / Kevin Ker |
| Test Mode | Transmit by 802.11n-HT20 at channel 2422MHz (CDD Mode) | Test Voltage         | 110V/60Hz       |

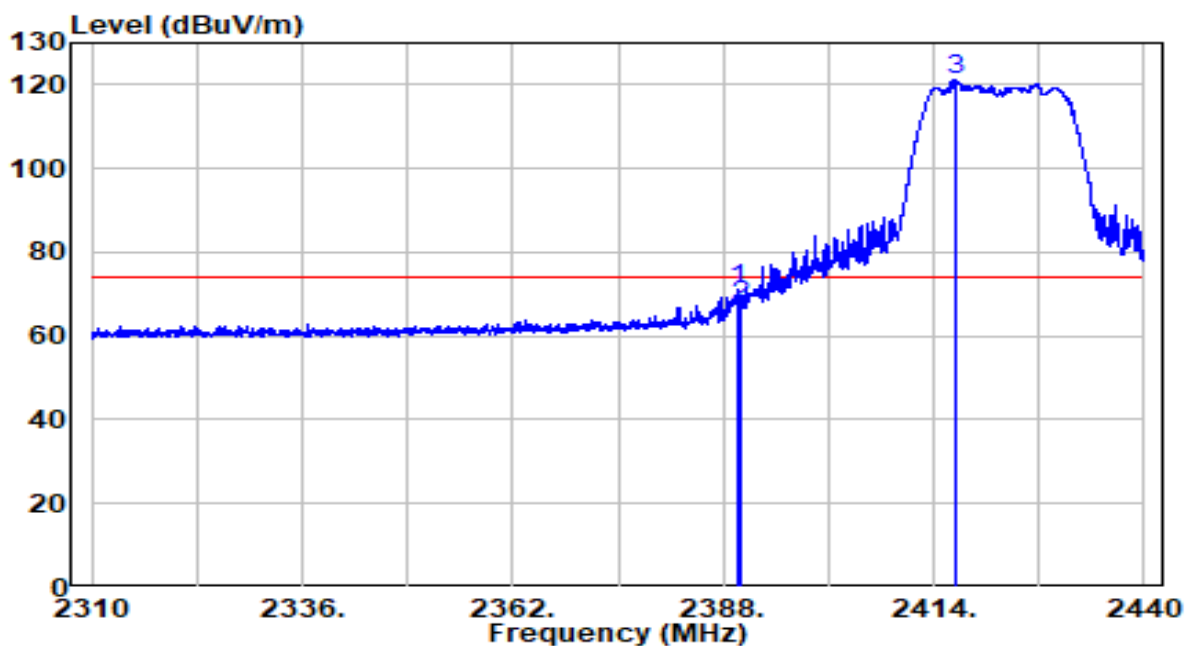


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | 2389.755        | 38.62          | 32.29    | 70.92                | -3.08       | 74.00          | Peak              |
| 2  | 2390.000        | 34.82          | 32.30    | 67.12                | -6.88       | 74.00          | Peak              |
| 3  | * 2416.600      | 88.66          | 32.41    | 121.07               | N/A         | N/A            | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                        |                      |                 |
|-----------|--------------------------------------------------------|----------------------|-----------------|
| EUT       | AX6600 WI-FI 6 三頻電競路由器                                 | Date of Test         | 2020-05-16      |
| Factor    | BBHA 9120D                                             | Temp. / Humidity     | 17°C/51%        |
| Polarity  | Vertical                                               | Site / Test Engineer | AC1 / Kevin Ker |
| Test Mode | Transmit by 802.11n-HT20 at channel 2422MHz (CDD Mode) | Test Voltage         | 110V/60Hz       |

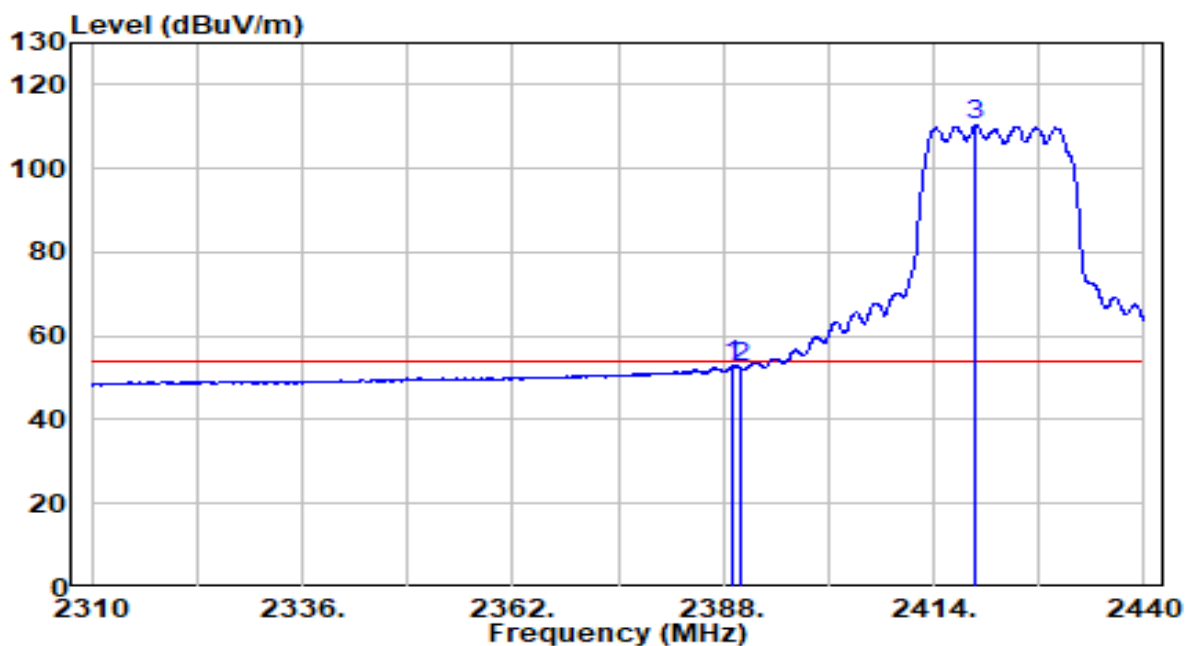


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | 2389.235        | 20.60          | 32.29    | 52.89                | -1.11       | 54.00          | Peak              |
| 2  | 2390.000        | 20.21          | 32.30    | 52.50                | -1.50       | 54.00          | Peak              |
| 3  | * 2419.265      | 77.99          | 32.42    | 110.41               | N/A         | N/A            | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                              |                      |                 |
|-----------|--------------------------------------------------------------|----------------------|-----------------|
| EUT       | AX6600 WI-FI 6 三頻電競路由器                                       | Date of Test         | 2020-05-16      |
| Factor    | BBHA 9120D                                                   | Temp. / Humidity     | 17°C/51%        |
| Polarity  | Horizontal                                                   | Site / Test Engineer | AC1 / Kevin Ker |
| Test Mode | Transmit by 802.11n-HT20 at channel<br>2437MHz<br>(CDD Mode) | Test Voltage         | 110V/60Hz       |

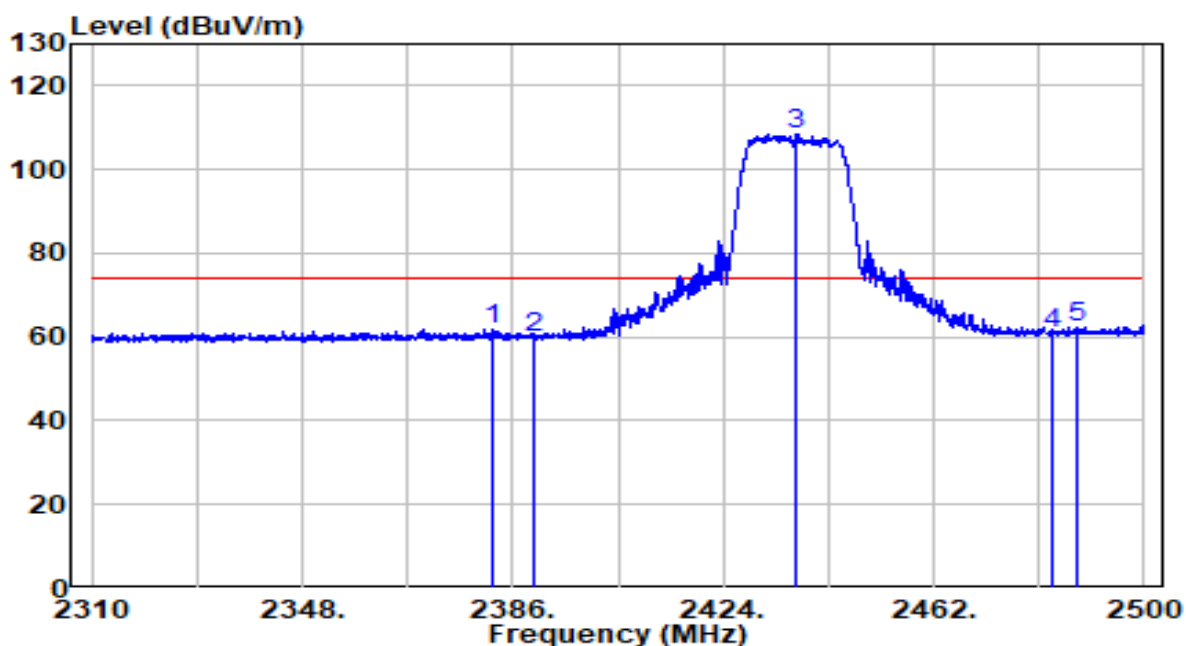


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | 2382.200        | 29.36          | 32.26    | 61.62                | -12.38      | 74.00          | Peak              |
| 2  | 2390.000        | 27.79          | 32.30    | 60.09                | -13.91      | 74.00          | Peak              |
| 3  | * 2437.300      | 75.95          | 32.50    | 108.45               | N/A         | N/A            | Peak              |
| 4  | 2483.500        | 28.31          | 32.71    | 61.02                | -12.98      | 74.00          | Peak              |
| 5  | 2487.840        | 29.44          | 32.73    | 62.17                | -11.83      | 74.00          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                       |                      |                 |
|-----------|-------------------------------------------------------|----------------------|-----------------|
| EUT       | AX6600 WI-FI 6 三頻電競路由器                                | Date of Test         | 2020-05-16      |
| Factor    | BBHA 9120D                                            | Temp. / Humidity     | 17°C/51%        |
| Polarity  | Horizontal                                            | Site / Test Engineer | AC1 / Kevin Ker |
| Test Mode | Transmit by 802.11n-HT20 at channel 2437MHz(CDD Mode) | Test Voltage         | 110V/60Hz       |

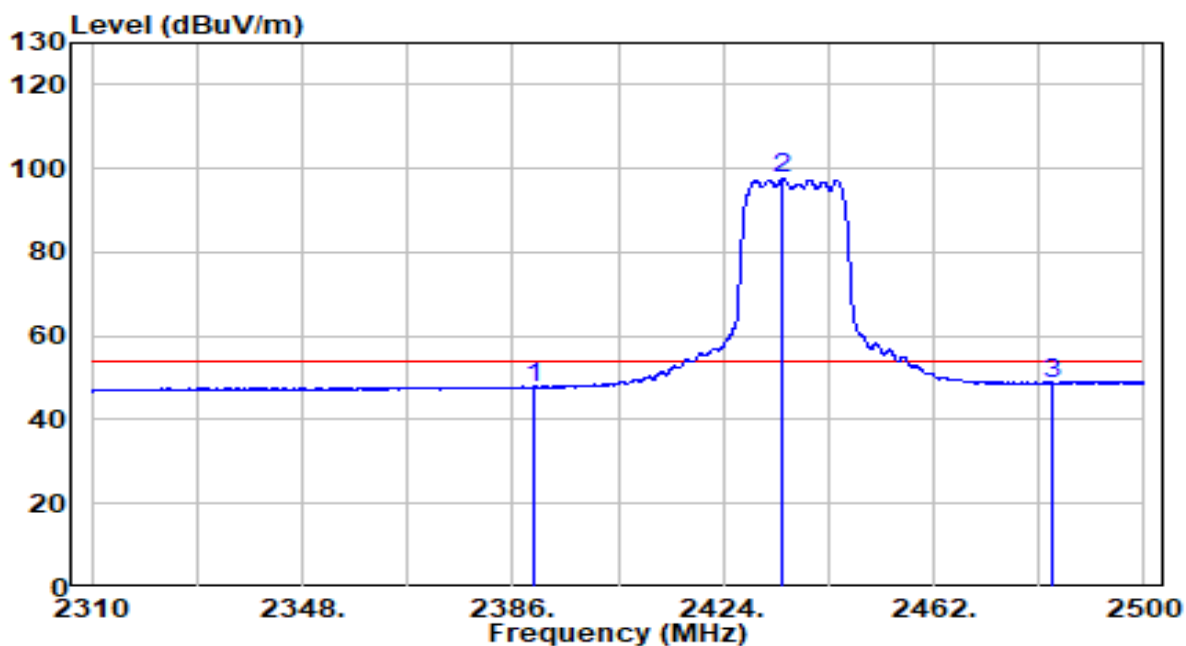


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | 2390.000        | 15.40          | 32.30    | 47.70                | -6.30       | 54.00          | Peak              |
| 2  | * 2434.830      | 65.03          | 32.49    | 97.53                | N/A         | N/A            | Peak              |
| 3  | 2483.500        | 16.04          | 32.71    | 48.75                | -5.25       | 54.00          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                       |                      |                 |
|-----------|-------------------------------------------------------|----------------------|-----------------|
| EUT       | AX6600 WI-FI 6 三頻電競路由器                                | Date of Test         | 2020-05-16      |
| Factor    | BBHA 9120D                                            | Temp. / Humidity     | 17°C/51%        |
| Polarity  | Vertical                                              | Site / Test Engineer | AC1 / Kevin Ker |
| Test Mode | Transmit by 802.11n-HT20 at channel 2437MHz(CDD Mode) | Test Voltage         | 110V/60Hz       |

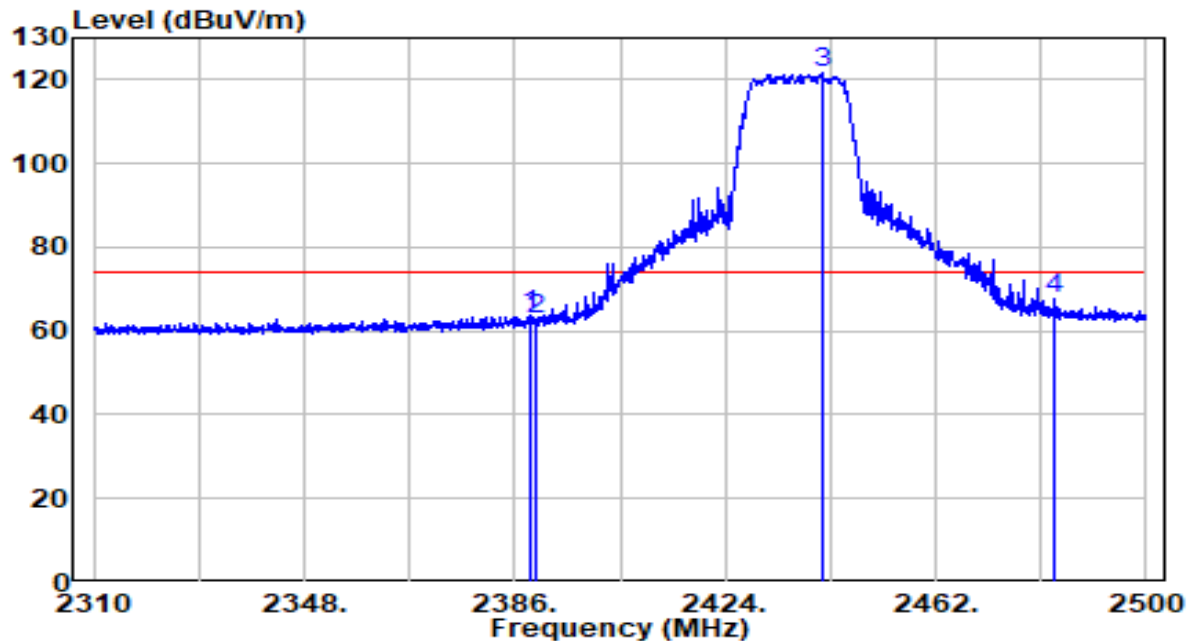


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | 2388.850        | 31.56          | 32.29    | 63.85                | -10.15      | 74.00          | Peak              |
| 2  | 2390.000        | 30.25          | 32.30    | 62.55                | -11.45      | 74.00          | Peak              |
| 3  | * 2441.480      | 89.20          | 32.52    | 121.72               | N/A         | N/A            | Peak              |
| 4  | 2483.500        | 34.95          | 32.71    | 67.66                | -6.34       | 74.00          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                       |                      |                 |
|-----------|-------------------------------------------------------|----------------------|-----------------|
| EUT       | AX6600 WI-FI 6 三頻電競路由器                                | Date of Test         | 2020-05-16      |
| Factor    | BBHA 9120D                                            | Temp. / Humidity     | 17°C/51%        |
| Polarity  | Vertical                                              | Site / Test Engineer | AC1 / Kevin Ker |
| Test Mode | Transmit by 802.11n-HT20 at channel 2437MHz(CDD Mode) | Test Voltage         | 110V/60Hz       |

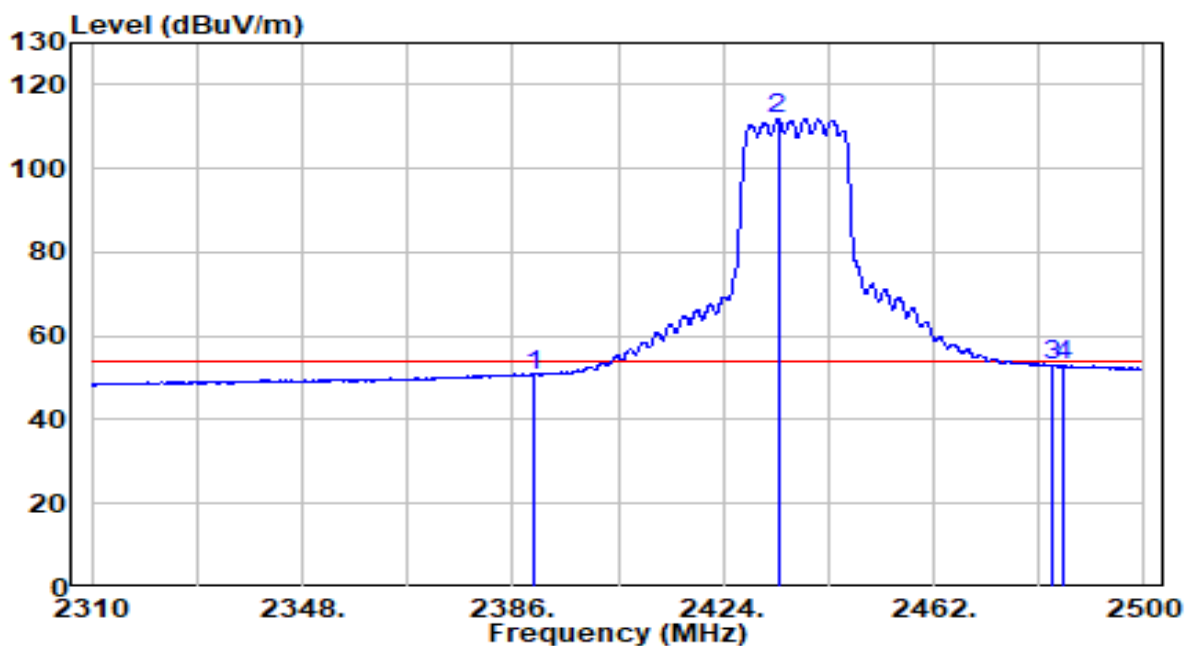


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | 2390.000        | 18.47          | 32.30    | 50.77                | -3.23       | 54.00          | Peak              |
| 2  | * 2433.880      | 79.27          | 32.49    | 111.76               | N/A         | N/A            | Peak              |
| 3  | 2483.500        | 20.12          | 32.71    | 52.83                | -1.17       | 54.00          | Peak              |
| 4  | 2485.560        | 20.30          | 32.72    | 53.02                | -0.98       | 54.00          | Peak              |

Note:

- "\*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
- Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                        |                      |                 |
|-----------|--------------------------------------------------------|----------------------|-----------------|
| EUT       | AX6600 WI-FI 6 三頻電競路由器                                 | Date of Test         | 2020-05-16      |
| Factor    | BBHA 9120D                                             | Temp. / Humidity     | 17°C/51%        |
| Polarity  | Horizontal                                             | Site / Test Engineer | AC1 / Kevin Ker |
| Test Mode | Transmit by 802.11n-HT20 at channel 2452MHz (CDD Mode) | Test Voltage         | 110V/60Hz       |

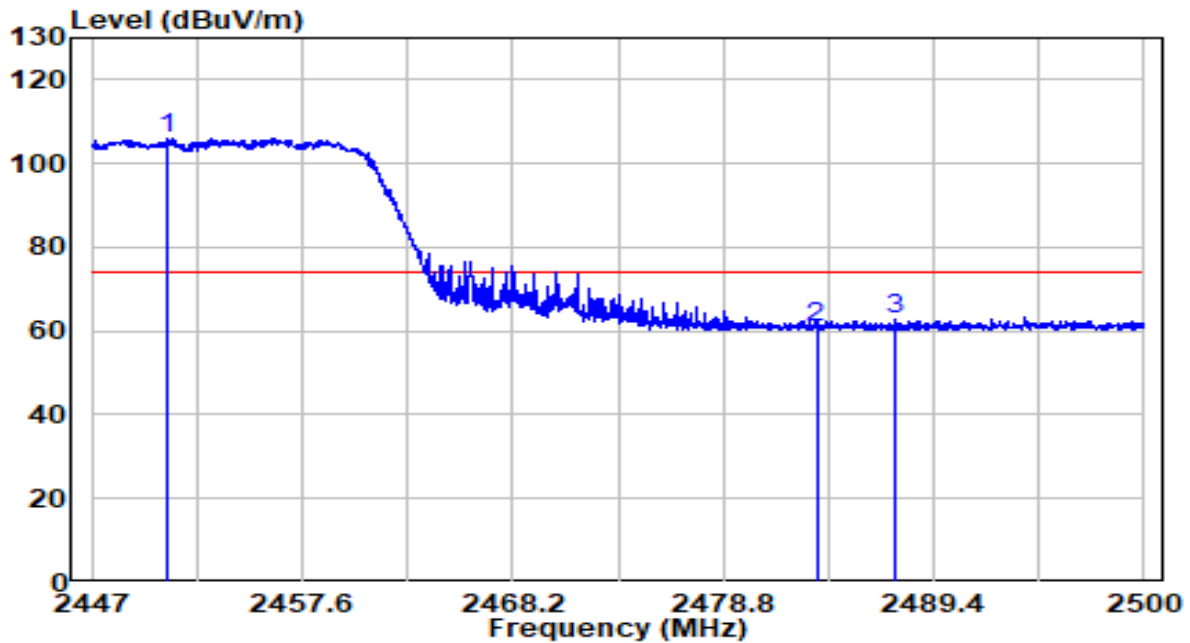


| No |   | Frequency (MHz) | Reading (dBUV) | C.F (dB) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | * | 2450.763        | 73.58          | 32.56    | 106.14               | N/A         | N/A            | Peak              |
| 2  |   | 2483.500        | 28.10          | 32.71    | 60.81                | -13.19      | 74.00          | Peak              |
| 3  |   | 2487.492        | 29.84          | 32.72    | 62.57                | -11.43      | 74.00          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                        |                      |                 |
|-----------|--------------------------------------------------------|----------------------|-----------------|
| EUT       | AX6600 WI-FI 6 三頻電競路由器                                 | Date of Test         | 2020-05-16      |
| Factor    | BBHA 9120D                                             | Temp. / Humidity     | 17°C/51%        |
| Polarity  | Horizontal                                             | Site / Test Engineer | AC1 / Kevin Ker |
| Test Mode | Transmit by 802.11n-HT20 at channel 2452MHz (CDD Mode) | Test Voltage         | 110V/60Hz       |

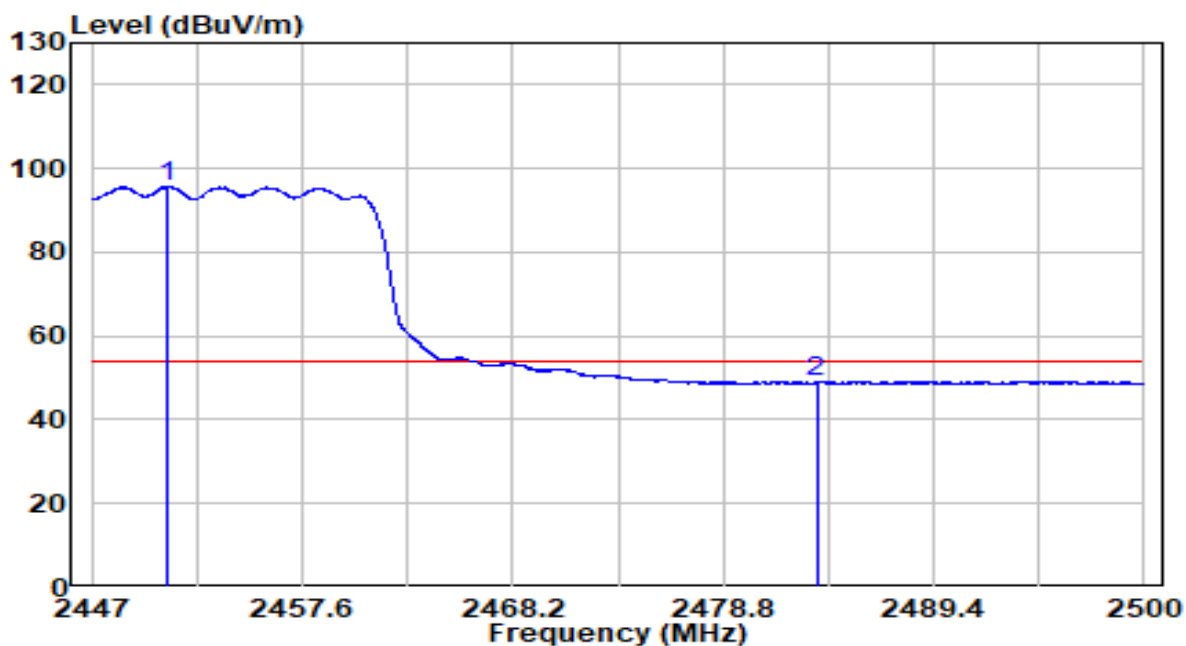


| No |   | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | * | 2450.790        | 63.13          | 32.56    | 95.69                | N/A         | N/A            | Peak              |
| 2  |   | 2483.500        | 16.11          | 32.71    | 48.82                | -5.18       | 54.00          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                        |                      |                 |
|-----------|--------------------------------------------------------|----------------------|-----------------|
| EUT       | AX6600 WI-FI 6 三頻電競路由器                                 | Date of Test         | 2020-05-16      |
| Factor    | BBHA 9120D                                             | Temp. / Humidity     | 17°C/51%        |
| Polarity  | Vertical                                               | Site / Test Engineer | AC1 / Kevin Ker |
| Test Mode | Transmit by 802.11n-HT20 at channel 2452MHz (CDD Mode) | Test Voltage         | 110V/60Hz       |

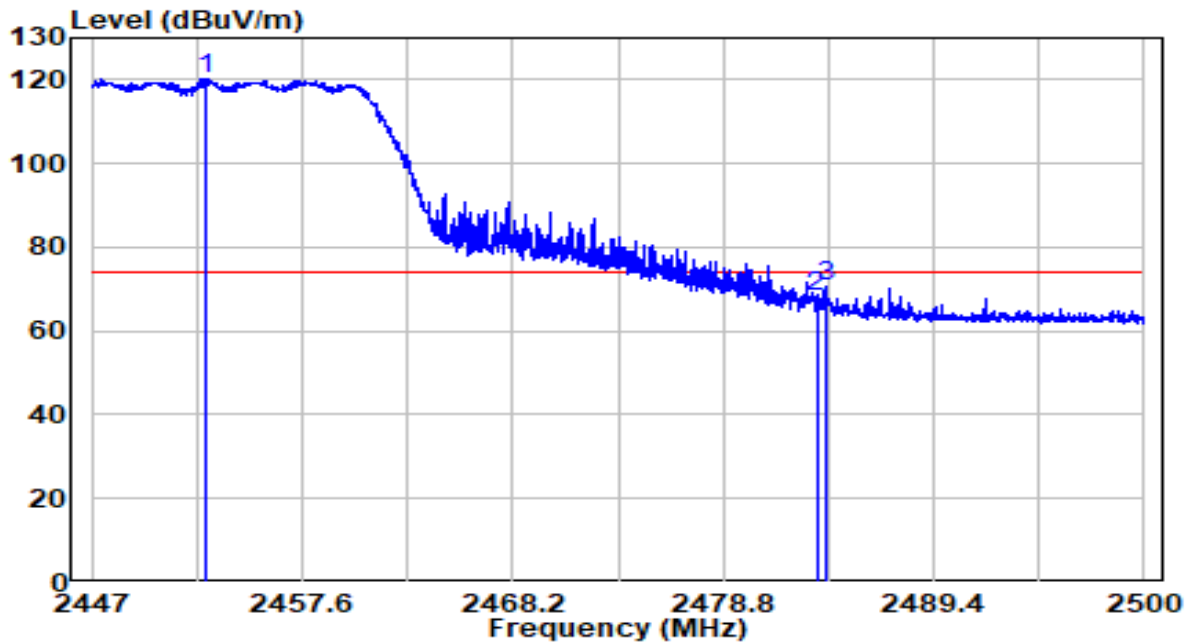


| No |   | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | * | 2452.724        | 87.73          | 32.57    | 120.30               | N/A         | N/A            | Peak              |
| 2  |   | 2483.500        | 35.47          | 32.71    | 68.18                | -5.82       | 74.00          | Peak              |
| 3  |   | 2483.968        | 37.83          | 32.71    | 70.54                | -3.46       | 74.00          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                        |                      |                 |
|-----------|--------------------------------------------------------|----------------------|-----------------|
| EUT       | AX6600 WI-FI 6 三頻電競路由器                                 | Date of Test         | 2020-05-16      |
| Factor    | BBHA 9120D                                             | Temp. / Humidity     | 17°C/51%        |
| Polarity  | Vertical                                               | Site / Test Engineer | AC1 / Kevin Ker |
| Test Mode | Transmit by 802.11n-HT20 at channel 2452MHz (CDD Mode) | Test Voltage         | 110V/60Hz       |

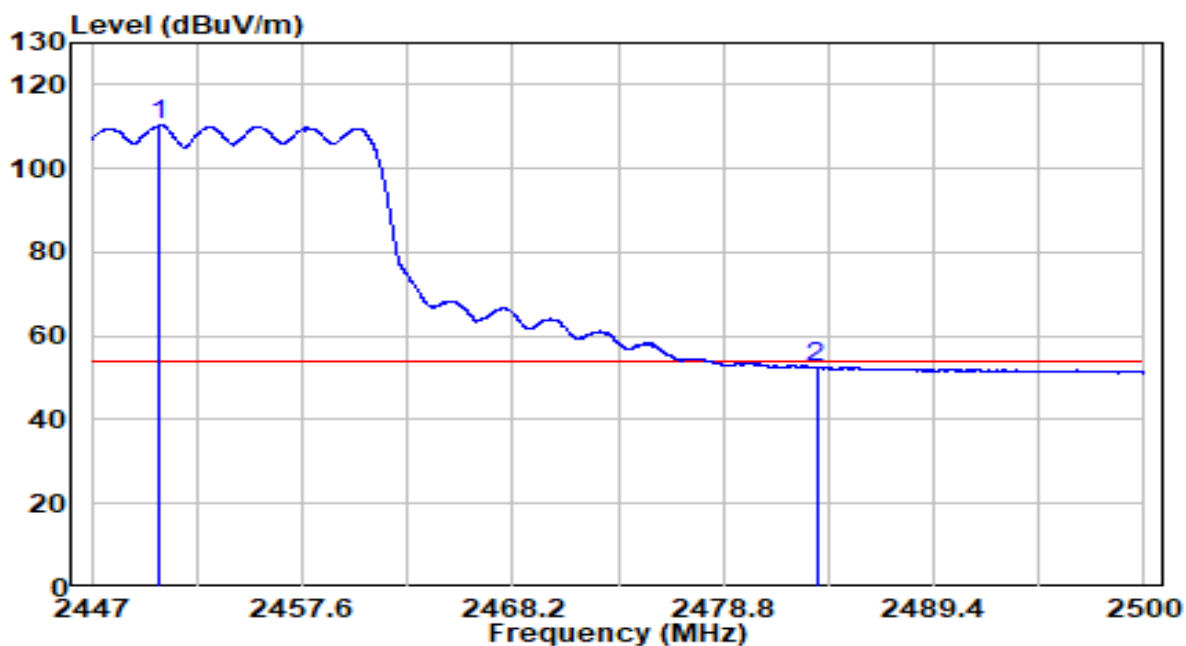


| No |   | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | * | 2450.445        | 77.71          | 32.56    | 110.27               | N/A         | N/A            | Peak              |
| 2  |   | 2483.500        | 19.75          | 32.71    | 52.45                | -1.55       | 54.00          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                        |                      |                 |
|-----------|--------------------------------------------------------|----------------------|-----------------|
| EUT       | AX6600 WI-FI 6 三頻電競路由器                                 | Date of Test         | 2020-05-16      |
| Factor    | BBHA 9120D                                             | Temp. / Humidity     | 17°C/51%        |
| Polarity  | Horizontal                                             | Site / Test Engineer | AC1 / Kevin Ker |
| Test Mode | Transmit by 802.11n-HT20 at channel 2457MHz (CDD Mode) | Test Voltage         | 110V/60Hz       |

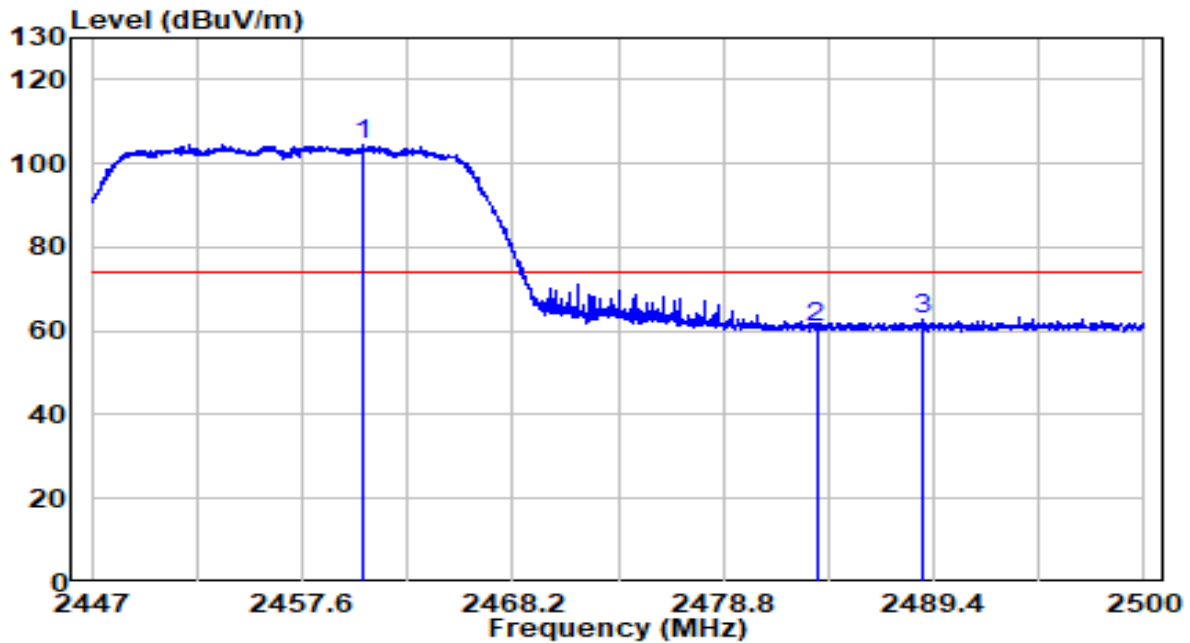


| No |   | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | * | 2460.647        | 72.01          | 32.61    | 104.62               | N/A         | N/A            | Peak              |
| 2  |   | 2483.500        | 28.13          | 32.71    | 60.84                | -13.16      | 74.00          | Peak              |
| 3  |   | 2488.817        | 29.86          | 32.73    | 62.59                | -11.41      | 74.00          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                        |                      |                 |
|-----------|--------------------------------------------------------|----------------------|-----------------|
| EUT       | AX6600 WI-FI 6 三頻電競路由器                                 | Date of Test         | 2020-05-16      |
| Factor    | BBHA 9120D                                             | Temp. / Humidity     | 17°C/51%        |
| Polarity  | Horizontal                                             | Site / Test Engineer | AC1 / Kevin Ker |
| Test Mode | Transmit by 802.11n-HT20 at channel 2457MHz (CDD Mode) | Test Voltage         | 110V/60Hz       |

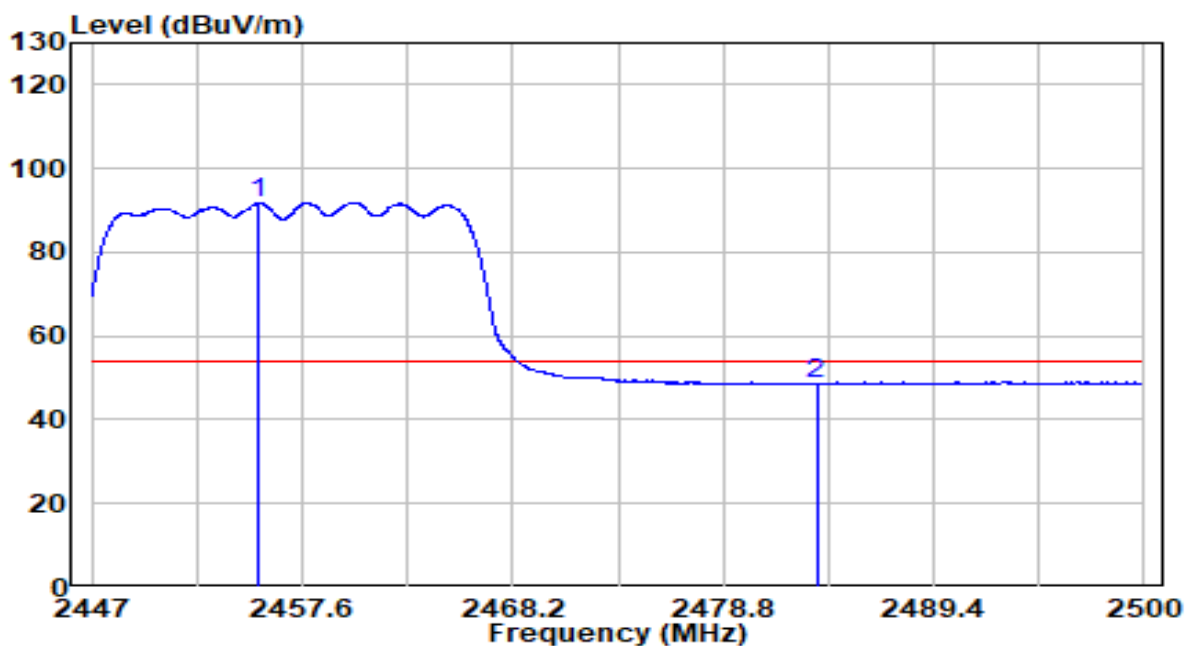


| No |   | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | * | 2455.427        | 59.26          | 32.58    | 91.84                | N/A         | N/A            | Peak              |
| 2  |   | 2483.500        | 15.86          | 32.71    | 48.57                | -5.43       | 54.00          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                        |                      |                 |
|-----------|--------------------------------------------------------|----------------------|-----------------|
| EUT       | AX6600 WI-FI 6 三頻電競路由器                                 | Date of Test         | 2020-05-16      |
| Factor    | BBHA 9120D                                             | Temp. / Humidity     | 17°C/51%        |
| Polarity  | Vertical                                               | Site / Test Engineer | AC1 / Kevin Ker |
| Test Mode | Transmit by 802.11n-HT20 at channel 2457MHz (CDD Mode) | Test Voltage         | 110V/60Hz       |

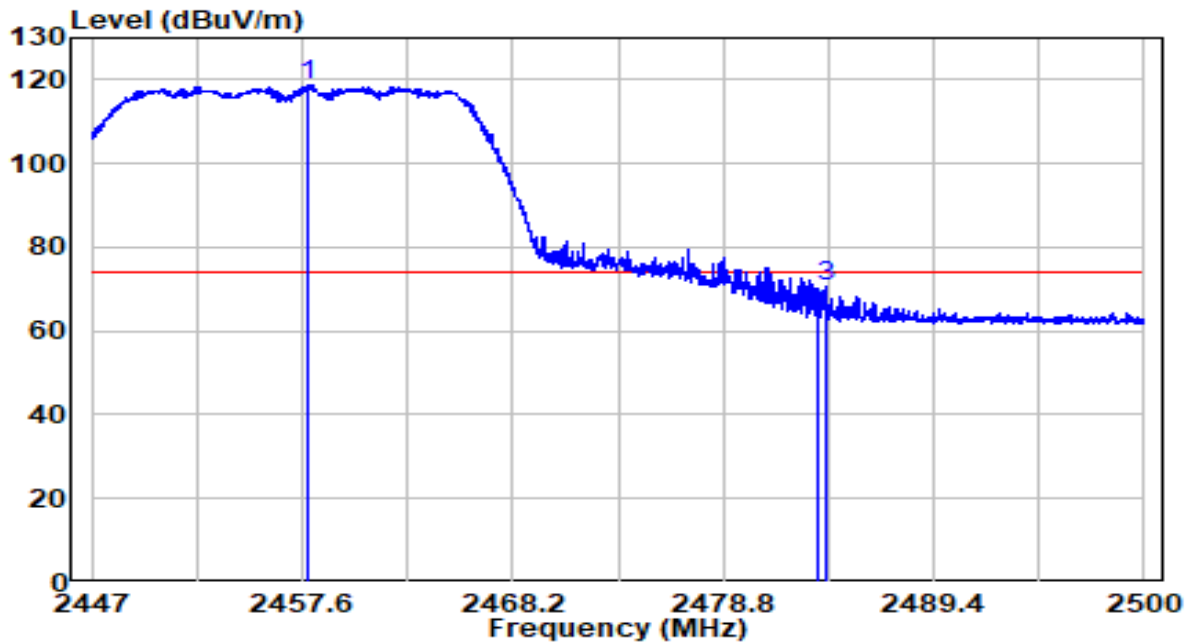


| No |   | Frequency (MHz) | Reading (dBUV) | C.F (dB) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | * | 2457.892        | 86.23          | 32.59    | 118.83               | N/A         | N/A            | Peak              |
| 2  |   | 2483.500        | 30.92          | 32.71    | 63.63                | -10.37      | 74.00          | Peak              |
| 3  |   | 2483.941        | 37.81          | 32.71    | 70.52                | -3.48       | 74.00          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                        |                      |                 |
|-----------|--------------------------------------------------------|----------------------|-----------------|
| EUT       | AX6600 WI-FI 6 三頻電競路由器                                 | Date of Test         | 2020-05-16      |
| Factor    | BBHA 9120D                                             | Temp. / Humidity     | 17°C/51%        |
| Polarity  | Vertical                                               | Site / Test Engineer | AC1 / Kevin Ker |
| Test Mode | Transmit by 802.11n-HT20 at channel 2457MHz (CDD Mode) | Test Voltage         | 110V/60Hz       |

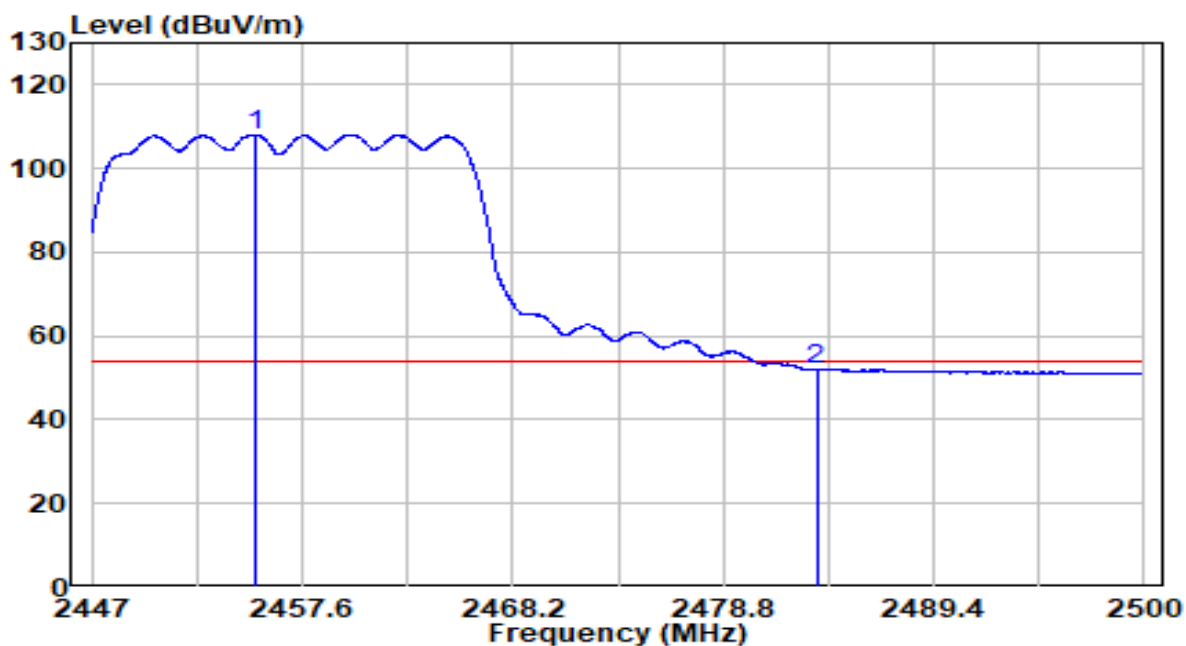


| No |   | Frequency (MHz) | Reading (dBUV) | C.F (dB) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | * | 2455.188        | 75.57          | 32.58    | 108.16               | N/A         | N/A            | Peak              |
| 2  |   | 2483.500        | 19.26          | 32.71    | 51.97                | -2.03       | 54.00          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                        |                      |                 |
|-----------|--------------------------------------------------------|----------------------|-----------------|
| EUT       | AX6600 WI-FI 6 三頻電競路由器                                 | Date of Test         | 2020-05-16      |
| Factor    | BBHA 9120D                                             | Temp. / Humidity     | 17°C/51%        |
| Polarity  | Horizontal                                             | Site / Test Engineer | AC1 / Kevin Ker |
| Test Mode | Transmit by 802.11n-HT20 at channel 2462MHz (CDD Mode) | Test Voltage         | 110V/60Hz       |

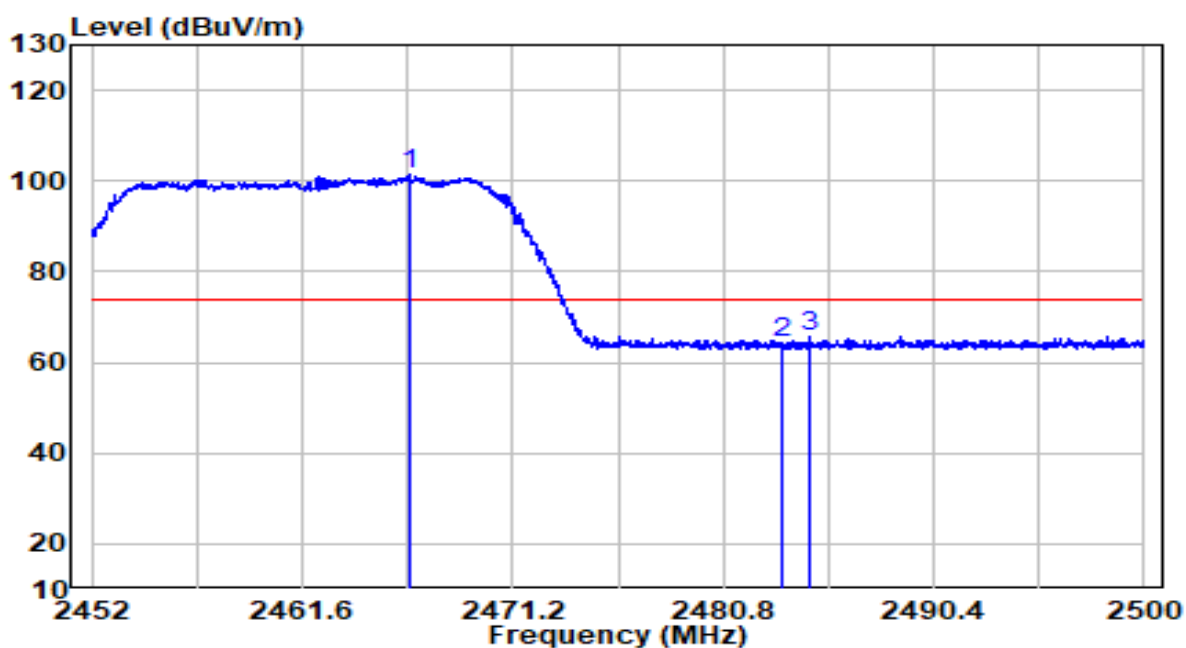


| No |   | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | * | 2466.544        | 68.64          | 32.63    | 101.27               | N/A         | N/A            | Peak              |
| 2  |   | 2483.500        | 31.53          | 32.71    | 64.24                | -9.76       | 74.00          | Peak              |
| 3  |   | 2484.760        | 33.18          | 32.71    | 65.89                | -8.11       | 74.00          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                        |                      |                 |
|-----------|--------------------------------------------------------|----------------------|-----------------|
| EUT       | AX6600 WI-FI 6 三頻電競路由器                                 | Date of Test         | 2020-05-16      |
| Factor    | BBHA 9120D                                             | Temp. / Humidity     | 17°C/51%        |
| Polarity  | Horizontal                                             | Site / Test Engineer | AC1 / Kevin Ker |
| Test Mode | Transmit by 802.11n-HT20 at channel 2462MHz (CDD Mode) | Test Voltage         | 110V/60Hz       |

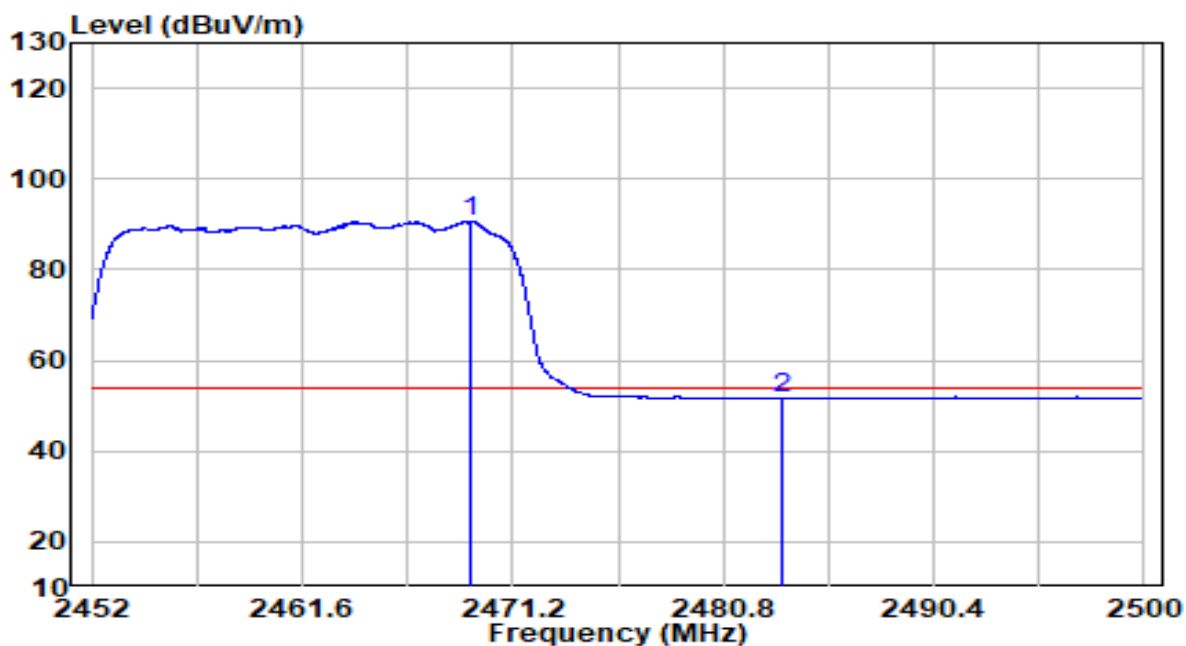


| No |   | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | * | 2469.328        | 58.00          | 32.65    | 90.64                | N/A         | N/A            | Peak              |
| 2  |   | 2483.500        | 18.79          | 32.71    | 51.49                | -2.51       | 54.00          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                        |                      |                 |
|-----------|--------------------------------------------------------|----------------------|-----------------|
| EUT       | AX6600 WI-FI 6 三頻電競路由器                                 | Date of Test         | 2020-05-16      |
| Factor    | BBHA 9120D                                             | Temp. / Humidity     | 17°C/51%        |
| Polarity  | Vertical                                               | Site / Test Engineer | AC1 / Kevin Ker |
| Test Mode | Transmit by 802.11n-HT20 at channel 2462MHz (CDD Mode) | Test Voltage         | 110V/60Hz       |

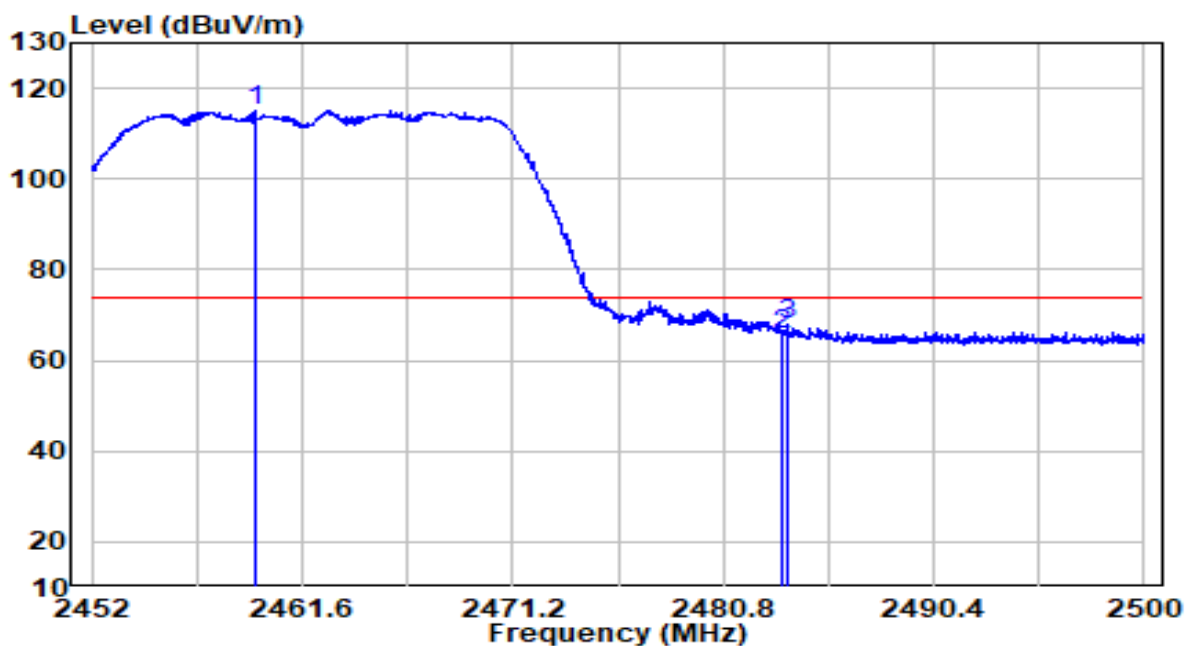


| No |   | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | * | 2459.440        | 82.46          | 32.60    | 115.06               | N/A         | N/A            | Peak              |
| 2  |   | 2483.500        | 33.17          | 32.71    | 65.88                | -8.12       | 74.00          | Peak              |
| 3  |   | 2483.704        | 35.13          | 32.71    | 67.84                | -6.16       | 74.00          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                        |                      |                 |
|-----------|--------------------------------------------------------|----------------------|-----------------|
| EUT       | AX6600 WI-FI 6 三頻電競路由器                                 | Date of Test         | 2020-05-16      |
| Factor    | BBHA 9120D                                             | Temp. / Humidity     | 17°C/51%        |
| Polarity  | Vertical                                               | Site / Test Engineer | AC1 / Kevin Ker |
| Test Mode | Transmit by 802.11n-HT20 at channel 2462MHz (CDD Mode) | Test Voltage         | 110V/60Hz       |

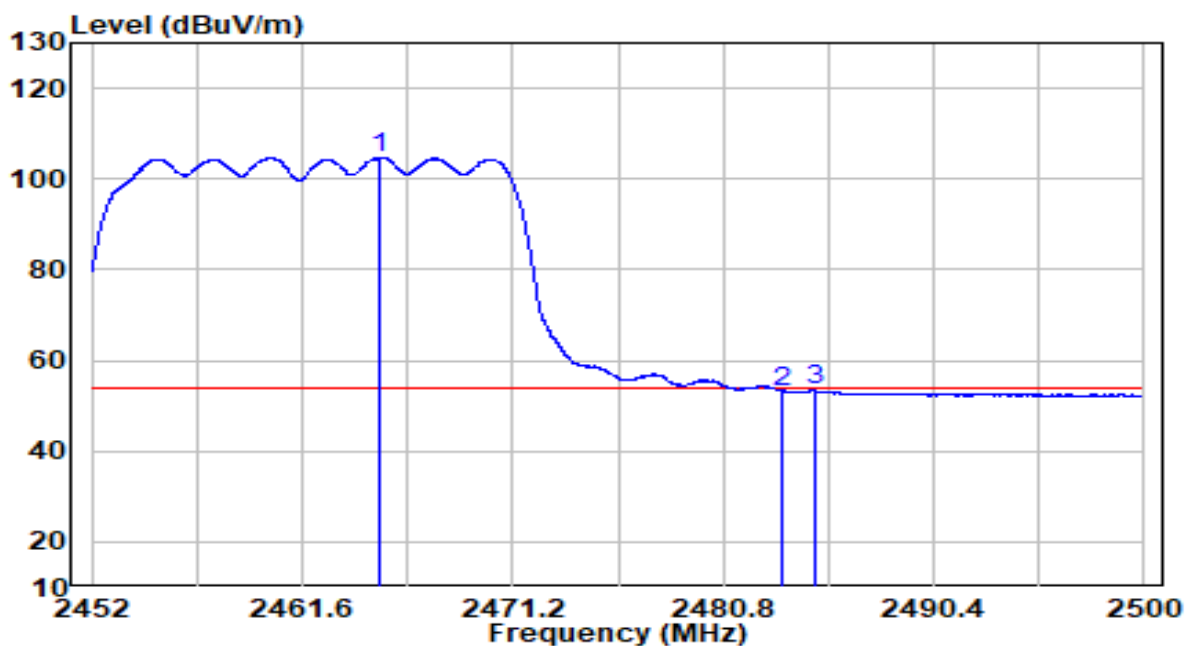


| No |   | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | * | 2465.176        | 72.07          | 32.63    | 104.70               | N/A         | N/A            | Peak              |
| 2  |   | 2483.500        | 20.41          | 32.71    | 53.12                | -0.88       | 54.00          | Peak              |
| 3  |   | 2485.000        | 20.77          | 32.71    | 53.48                | -0.52       | 54.00          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                        |                      |                 |
|-----------|--------------------------------------------------------|----------------------|-----------------|
| EUT       | AX6600 WI-FI 6 三頻電競路由器                                 | Date of Test         | 2020-05-16      |
| Factor    | BBHA 9120D                                             | Temp. / Humidity     | 17°C/51%        |
| Polarity  | Horizontal                                             | Site / Test Engineer | AC1 / Kevin Ker |
| Test Mode | Transmit by 802.11n-HT40 at channel 2422MHz (CDD Mode) | Test Voltage         | 110V/60Hz       |

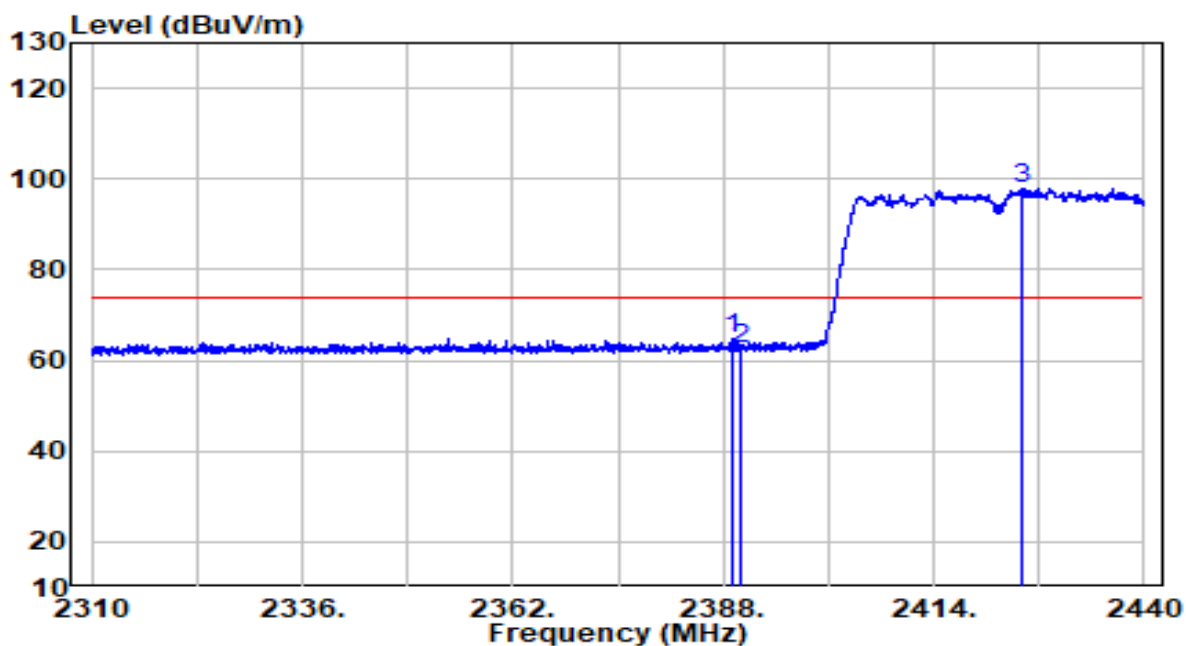


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | 2389.235        | 32.41          | 32.29    | 64.71                | -9.29       | 74.00          | Peak              |
| 2  | 2390.000        | 30.32          | 32.30    | 62.62                | -11.38      | 74.00          | Peak              |
| 3  | * 2424.920      | 65.38          | 32.45    | 97.83                | N/A         | N/A            | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                        |                      |                 |
|-----------|--------------------------------------------------------|----------------------|-----------------|
| EUT       | AX6600 WI-FI 6 三頻電競路由器                                 | Date of Test         | 2020-05-16      |
| Factor    | BBHA 9120D                                             | Temp. / Humidity     | 17°C/51%        |
| Polarity  | Horizontal                                             | Site / Test Engineer | AC1 / Kevin Ker |
| Test Mode | Transmit by 802.11n-HT40 at channel 2422MHz (CDD Mode) | Test Voltage         | 110V/60Hz       |

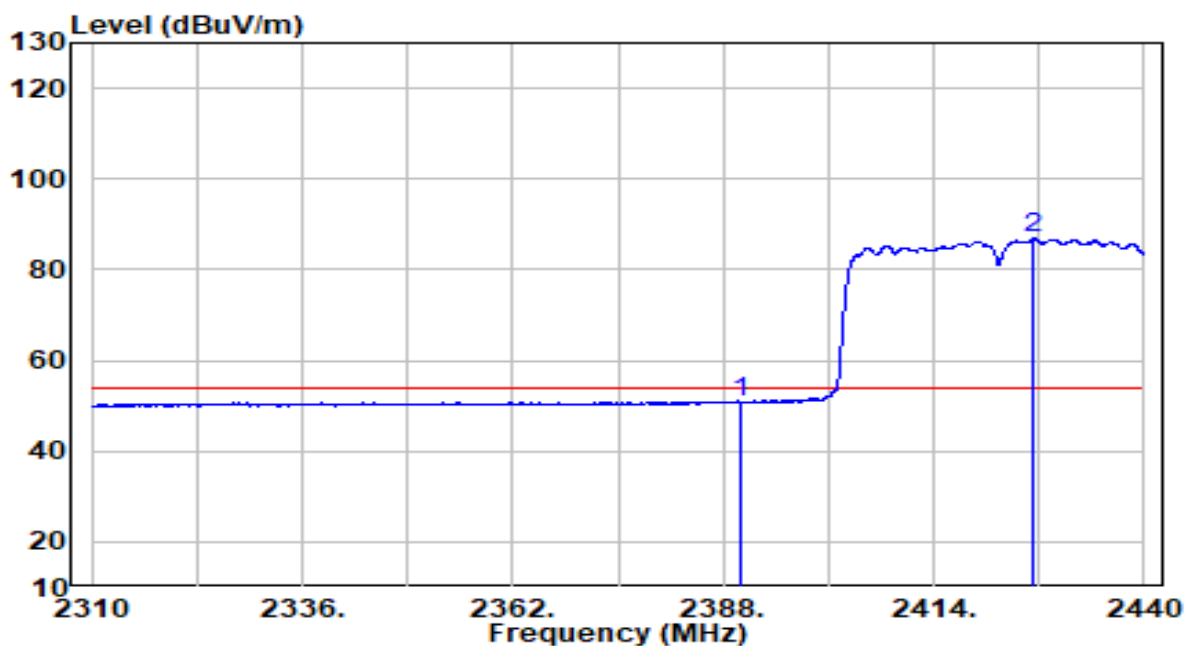


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | 2390.000        | 18.51          | 32.30    | 50.81                | -3.19       | 54.00          | Peak              |
| 2  | * 2426.415      | 54.52          | 32.46    | 86.97                | N/A         | N/A            | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                        |                      |                 |
|-----------|--------------------------------------------------------|----------------------|-----------------|
| EUT       | AX6600 WI-FI 6 三頻電競路由器                                 | Date of Test         | 2020-05-16      |
| Factor    | BBHA 9120D                                             | Temp. / Humidity     | 17°C/51%        |
| Polarity  | Vertical                                               | Site / Test Engineer | AC1 / Kevin Ker |
| Test Mode | Transmit by 802.11n-HT40 at channel 2422MHz (CDD Mode) | Test Voltage         | 110V/60Hz       |

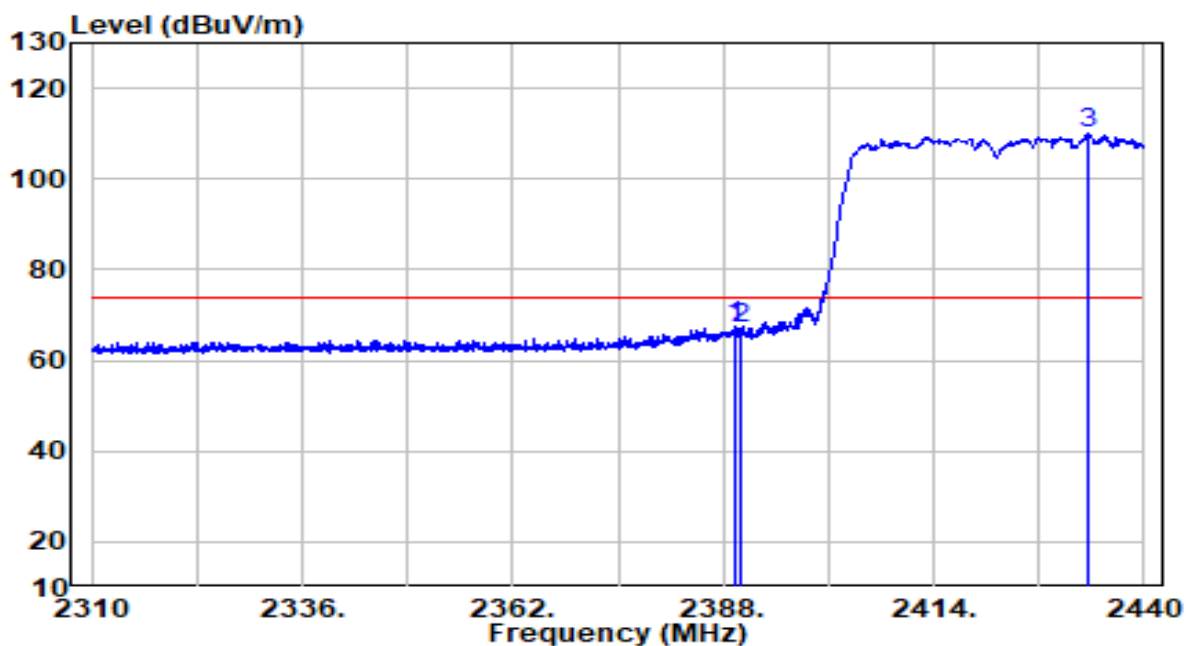


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | 2389.430        | 35.21          | 32.29    | 67.50                | -6.50       | 74.00          | Peak              |
| 2  | 2390.000        | 34.63          | 32.30    | 66.93                | -7.07       | 74.00          | Peak              |
| 3  | * 2433.045      | 77.38          | 32.49    | 109.87               | N/A         | N/A            | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                        |                      |                 |
|-----------|--------------------------------------------------------|----------------------|-----------------|
| EUT       | AX6600 WI-FI 6 三頻電競路由器                                 | Date of Test         | 2020-05-16      |
| Factor    | BBHA 9120D                                             | Temp. / Humidity     | 17°C/51%        |
| Polarity  | Vertical                                               | Site / Test Engineer | AC1 / Kevin Ker |
| Test Mode | Transmit by 802.11n-HT40 at channel 2422MHz (CDD Mode) | Test Voltage         | 110V/60Hz       |

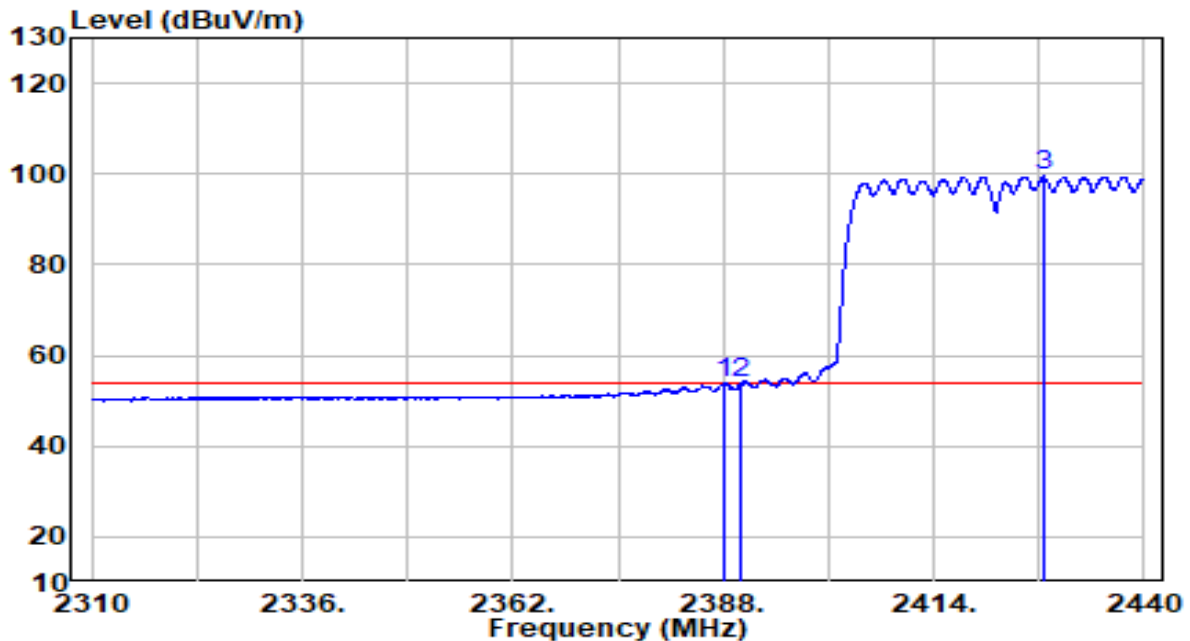


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | 2388.260        | 21.66          | 32.29    | 53.95                | -0.05       | 54.00          | Peak              |
| 2  | 2390.000        | 21.43          | 32.30    | 53.72                | -0.28       | 54.00          | Peak              |
| 3  | * 2427.520      | 67.01          | 32.46    | 99.47                | N/A         | N/A            | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                        |                      |                 |
|-----------|--------------------------------------------------------|----------------------|-----------------|
| EUT       | AX6600 WI-FI 6 三頻電競路由器                                 | Date of Test         | 2020-05-16      |
| Factor    | BBHA 9120D                                             | Temp. / Humidity     | 17°C/51%        |
| Polarity  | Horizontal                                             | Site / Test Engineer | AC1 / Kevin Ker |
| Test Mode | Transmit by 802.11n-HT40 at channel 2427MHz (CDD Mode) | Test Voltage         | 110V/60Hz       |

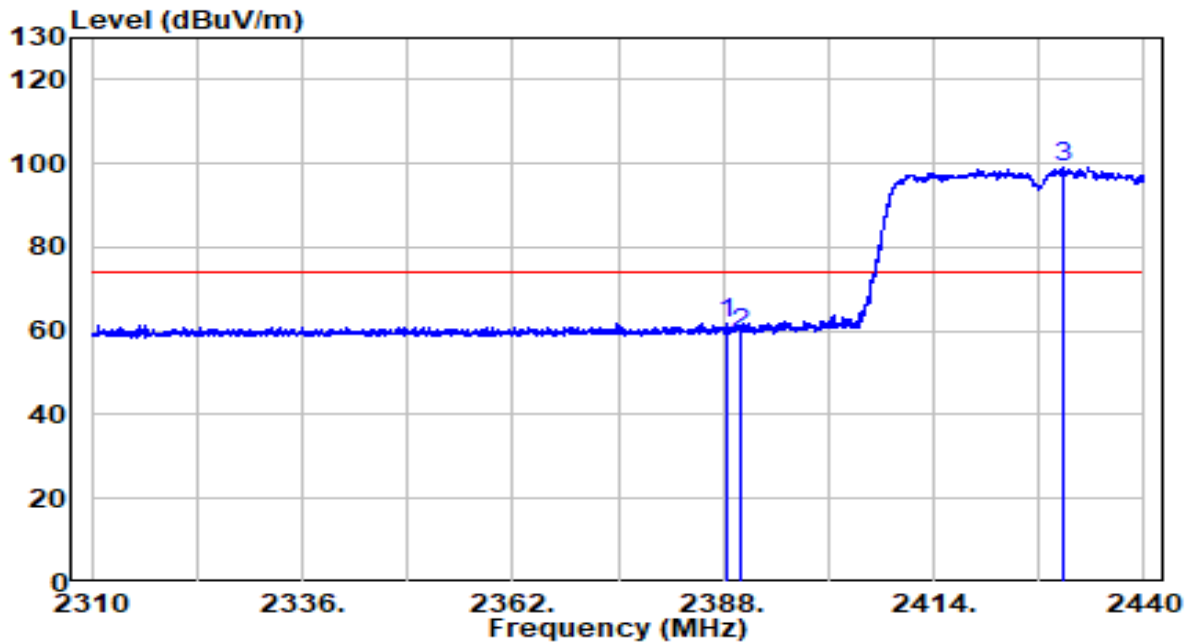


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | 2388.325        | 29.72          | 32.29    | 62.01                | -11.99      | 74.00          | Peak              |
| 2  | 2390.000        | 27.13          | 32.30    | 59.43                | -14.57      | 74.00          | Peak              |
| 3  | * 2429.990      | 66.67          | 32.47    | 99.15                | N/A         | N/A            | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                        |                      |                 |
|-----------|--------------------------------------------------------|----------------------|-----------------|
| EUT       | AX6600 WI-FI 6 三頻電競路由器                                 | Date of Test         | 2020-05-16      |
| Factor    | BBHA 9120D                                             | Temp. / Humidity     | 17°C/51%        |
| Polarity  | Horizontal                                             | Site / Test Engineer | AC1 / Kevin Ker |
| Test Mode | Transmit by 802.11n-HT40 at channel 2427MHz (CDD Mode) | Test Voltage         | 110V/60Hz       |

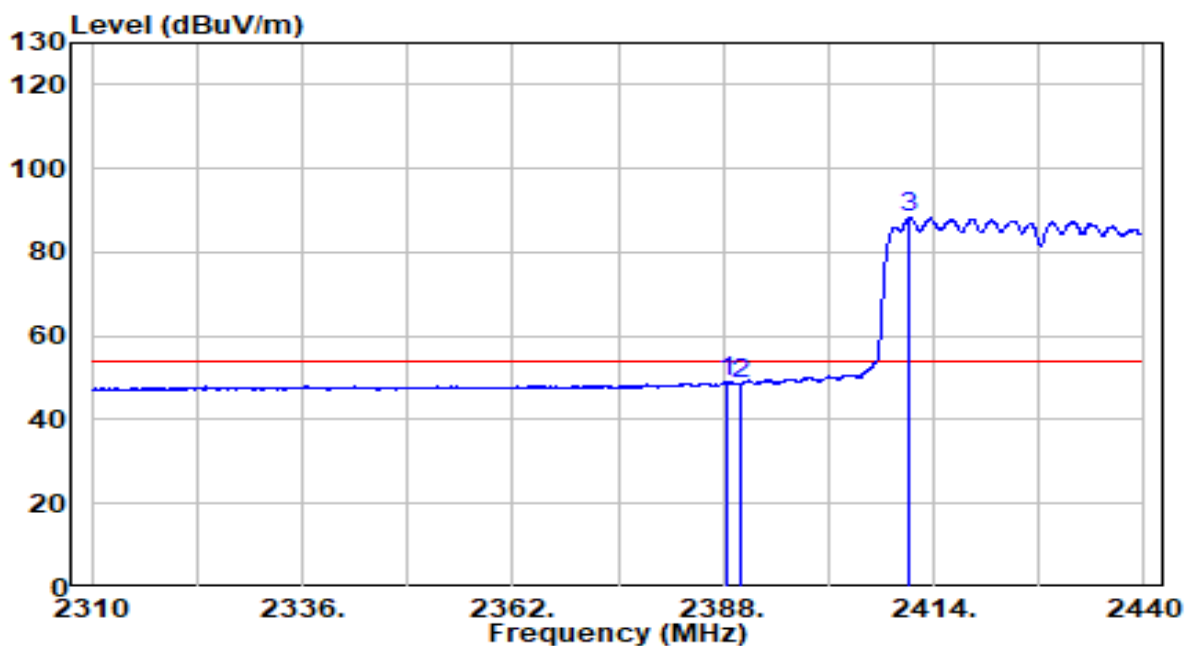


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | 2388.390        | 16.74          | 32.29    | 49.03                | -4.97       | 54.00          | Peak              |
| 2  | 2390.000        | 16.43          | 32.30    | 48.73                | -5.27       | 54.00          | Peak              |
| 3  | * 2411.075      | 55.77          | 32.39    | 88.16                | N/A         | N/A            | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                        |                      |                 |
|-----------|--------------------------------------------------------|----------------------|-----------------|
| EUT       | AX6600 WI-FI 6 三頻電競路由器                                 | Date of Test         | 2020-05-16      |
| Factor    | BBHA 9120D                                             | Temp. / Humidity     | 17°C/51%        |
| Polarity  | Vertical                                               | Site / Test Engineer | AC1 / Kevin Ker |
| Test Mode | Transmit by 802.11n-HT40 at channel 2427MHz (CDD Mode) | Test Voltage         | 110V/60Hz       |

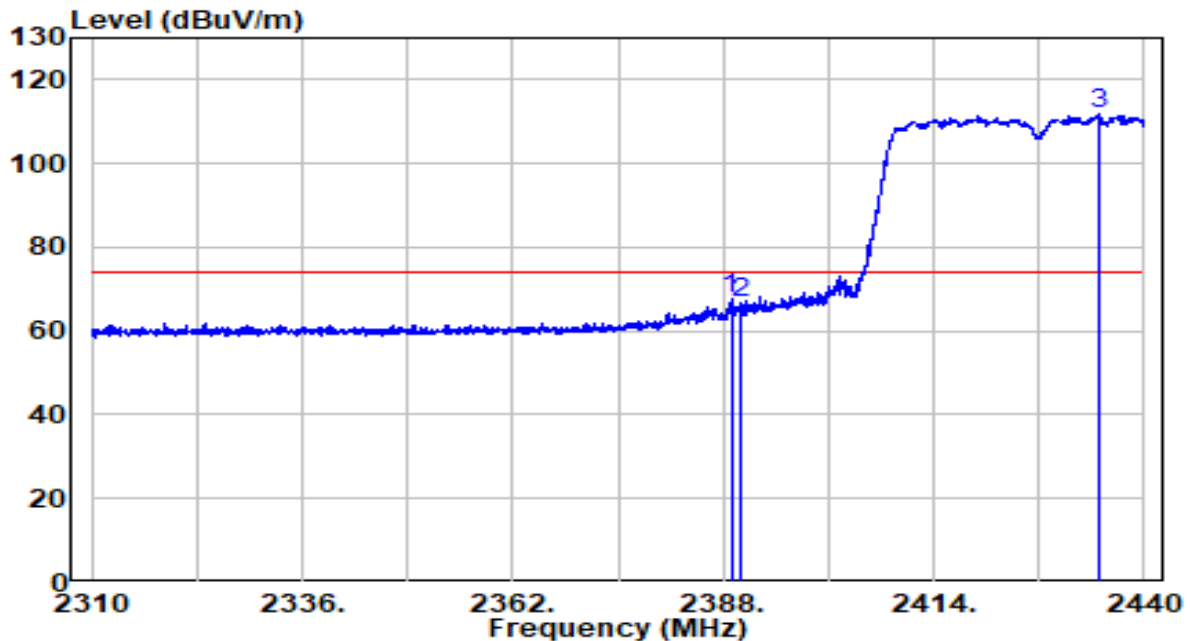


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | 2388.975        | 35.65          | 32.29    | 67.94                | -6.06       | 74.00          | Peak              |
| 2  | 2390.000        | 34.60          | 32.30    | 66.90                | -7.10       | 74.00          | Peak              |
| 3  | * 2434.280      | 79.46          | 32.49    | 111.95               | N/A         | N/A            | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                        |                      |                 |
|-----------|--------------------------------------------------------|----------------------|-----------------|
| EUT       | AX6600 WI-FI 6 三頻電競路由器                                 | Date of Test         | 2020-05-16      |
| Factor    | BBHA 9120D                                             | Temp. / Humidity     | 17°C/51%        |
| Polarity  | Vertical                                               | Site / Test Engineer | AC1 / Kevin Ker |
| Test Mode | Transmit by 802.11n-HT40 at channel 2427MHz (CDD Mode) | Test Voltage         | 110V/60Hz       |

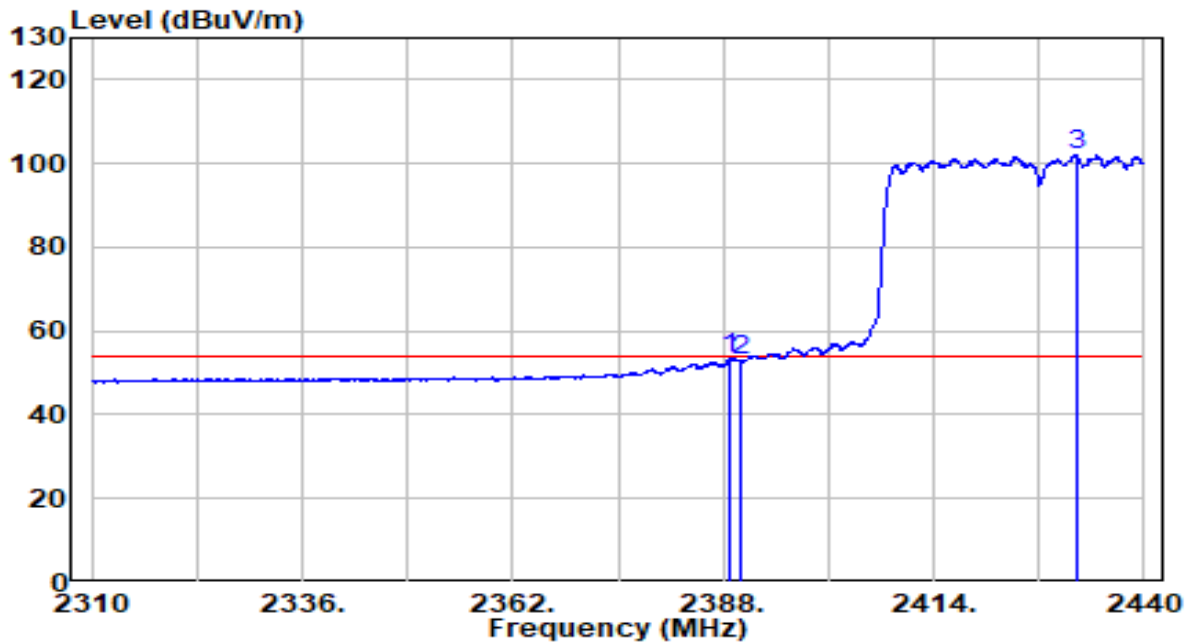


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | 2388.910        | 21.07          | 32.29    | 53.36                | -0.64       | 54.00          | Peak              |
| 2  | 2390.000        | 20.51          | 32.30    | 52.81                | -1.19       | 54.00          | Peak              |
| 3  | * 2431.615      | 69.34          | 32.48    | 101.82               | N/A         | N/A            | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                        |                      |                 |
|-----------|--------------------------------------------------------|----------------------|-----------------|
| EUT       | AX6600 WI-FI 6 三頻電競路由器                                 | Date of Test         | 2020-05-16      |
| Factor    | BBHA 9120D                                             | Temp. / Humidity     | 17°C/51%        |
| Polarity  | Horizontal                                             | Site / Test Engineer | AC1 / Kevin Ker |
| Test Mode | Transmit by 802.11n-HT40 at channel 2437MHz (CDD Mode) | Test Voltage         | 110V/60Hz       |

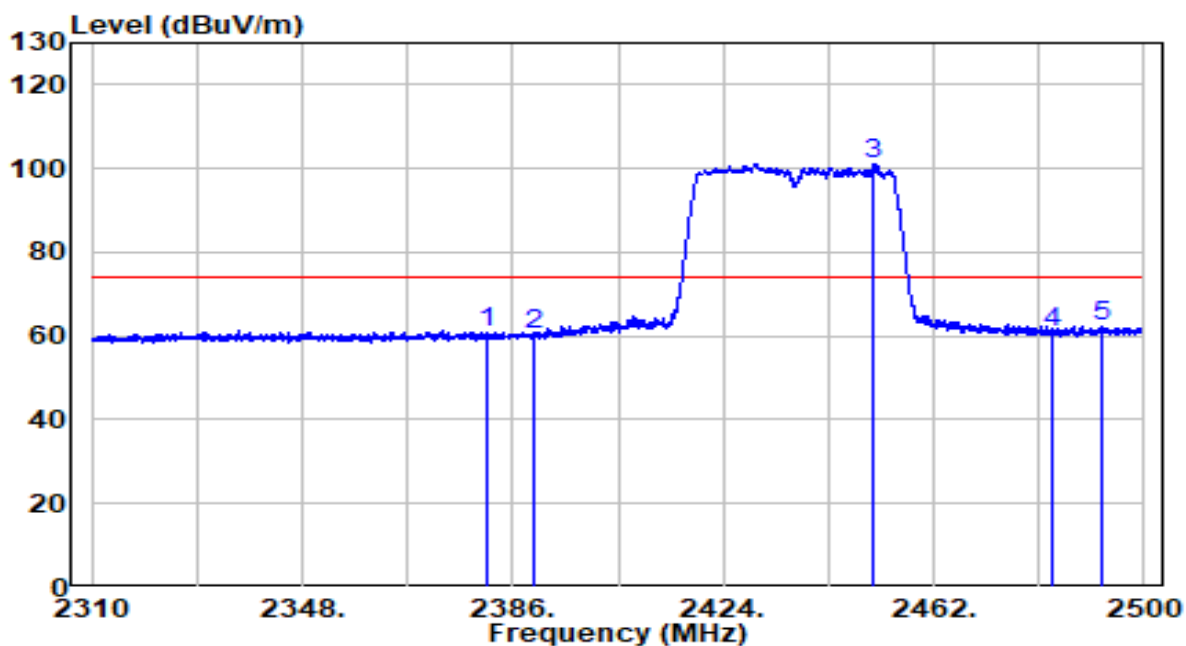


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | 2381.440        | 28.77          | 32.26    | 61.03                | -12.97      | 74.00          | Peak              |
| 2  | 2390.000        | 28.19          | 32.30    | 60.49                | -13.51      | 74.00          | Peak              |
| 3  | * 2451.170      | 68.40          | 32.57    | 100.97               | N/A         | N/A            | Peak              |
| 4  | 2483.500        | 28.24          | 32.71    | 60.95                | -13.05      | 74.00          | Peak              |
| 5  | 2492.495        | 29.46          | 32.75    | 62.21                | -11.79      | 74.00          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                        |                      |                 |
|-----------|--------------------------------------------------------|----------------------|-----------------|
| EUT       | AX6600 WI-FI 6 三頻電競路由器                                 | Date of Test         | 2020-05-16      |
| Factor    | BBHA 9120D                                             | Temp. / Humidity     | 17°C/51%        |
| Polarity  | Horizontal                                             | Site / Test Engineer | AC1 / Kevin Ker |
| Test Mode | Transmit by 802.11n-HT40 at channel 2437MHz (CDD Mode) | Test Voltage         | 110V/60Hz       |

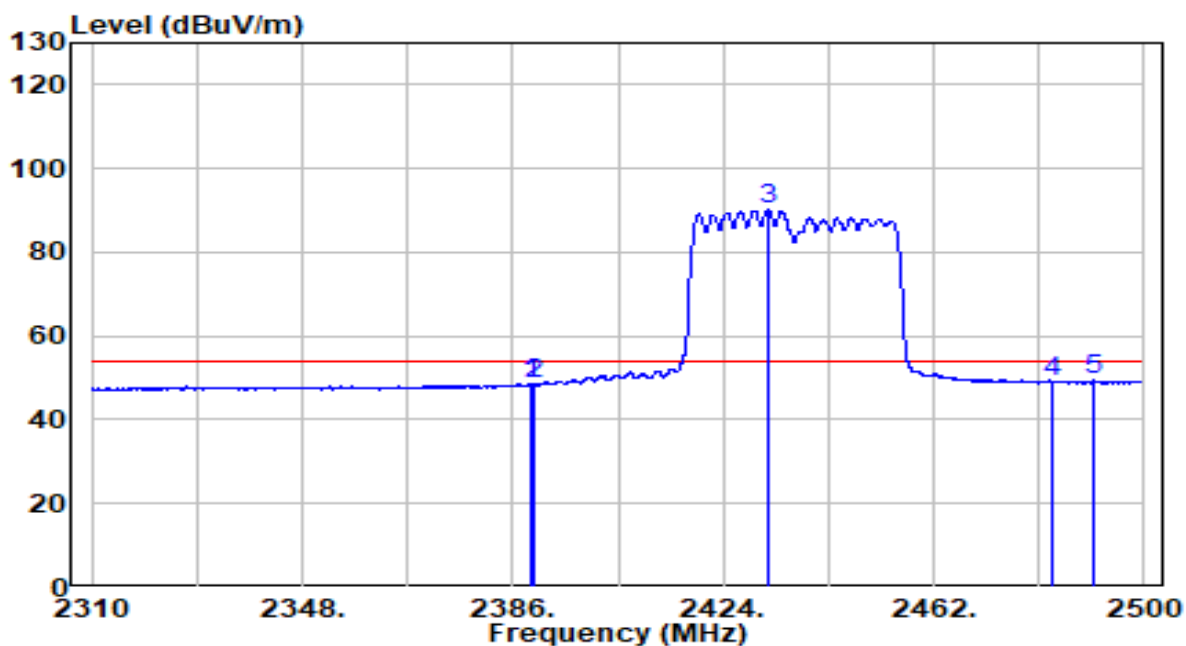


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | 2389.515        | 16.38          | 32.29    | 48.67                | -5.33       | 54.00          | Peak              |
| 2  | 2390.000        | 16.08          | 32.30    | 48.38                | -5.62       | 54.00          | Peak              |
| 3  | * 2432.170      | 57.80          | 32.48    | 90.28                | N/A         | N/A            | Peak              |
| 4  | 2483.500        | 16.27          | 32.71    | 48.98                | -5.02       | 54.00          | Peak              |
| 5  | 2490.975        | 16.60          | 32.74    | 49.34                | -4.66       | 54.00          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                        |                      |                 |
|-----------|--------------------------------------------------------|----------------------|-----------------|
| EUT       | AX6600 WI-FI 6 三頻電競路由器                                 | Date of Test         | 2020-05-16      |
| Factor    | BBHA 9120D                                             | Temp. / Humidity     | 17°C/51%        |
| Polarity  | Vertical                                               | Site / Test Engineer | AC1 / Kevin Ker |
| Test Mode | Transmit by 802.11n-HT40 at channel 2437MHz (CDD Mode) | Test Voltage         | 110V/60Hz       |

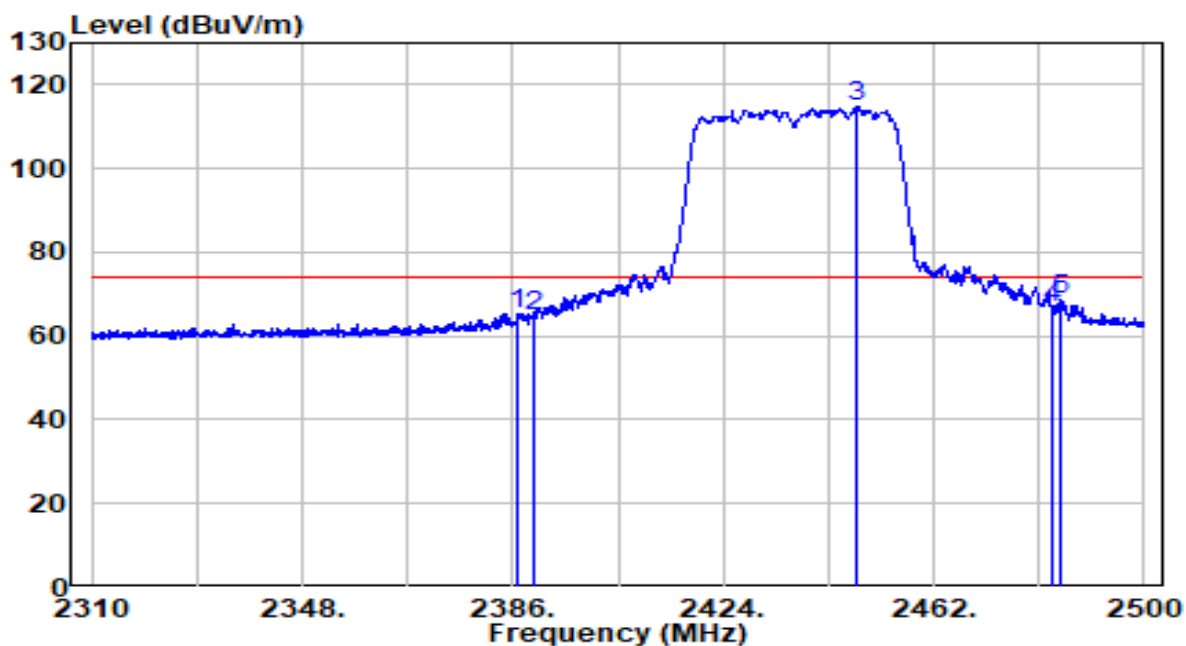


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | 2386.760        | 33.20          | 32.28    | 65.48                | -8.52       | 74.00          | Peak              |
| 2  | 2390.000        | 32.53          | 32.30    | 64.83                | -9.17       | 74.00          | Peak              |
| 3  | * 2448.225      | 82.44          | 32.55    | 114.99               | N/A         | N/A            | Peak              |
| 4  | 2483.500        | 34.09          | 32.71    | 66.80                | -7.20       | 74.00          | Peak              |
| 5  | 2484.800        | 35.98          | 32.71    | 68.69                | -5.31       | 74.00          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                        |                      |                 |
|-----------|--------------------------------------------------------|----------------------|-----------------|
| EUT       | AX6600 WI-FI 6 三頻電競路由器                                 | Date of Test         | 2020-05-16      |
| Factor    | BBHA 9120D                                             | Temp. / Humidity     | 17°C/51%        |
| Polarity  | Vertical                                               | Site / Test Engineer | AC1 / Kevin Ker |
| Test Mode | Transmit by 802.11n-HT40 at channel 2437MHz (CDD Mode) | Test Voltage         | 110V/60Hz       |

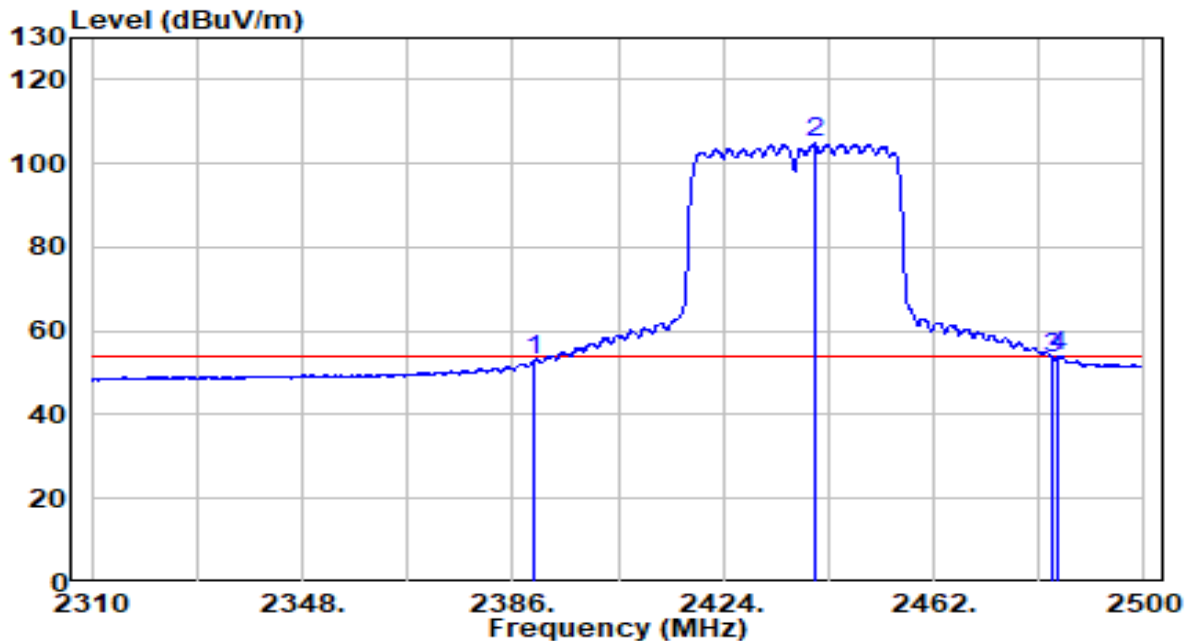


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | 2390.000        | 20.69          | 32.30    | 52.99                | -1.01       | 54.00          | Peak              |
| 2  | * 2440.530      | 72.50          | 32.52    | 105.02               | N/A         | N/A            | Peak              |
| 3  | 2483.500        | 20.99          | 32.71    | 53.70                | -0.30       | 54.00          | Peak              |
| 4  | 2484.515        | 21.24          | 32.71    | 53.95                | -0.05       | 54.00          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                       |                      |                 |
|-----------|-------------------------------------------------------|----------------------|-----------------|
| EUT       | AX6600 WI-FI 6 三頻電競路由器                                | Date of Test         | 2020-05-16      |
| Factor    | BBHA 9120D                                            | Temp. / Humidity     | 17°C/51%        |
| Polarity  | Horizontal                                            | Site / Test Engineer | AC1 / Kevin Ker |
| Test Mode | Transmit by 802.11n-HT40 at channel 2447MHz(CDD Mode) | Test Voltage         | 110V/60Hz       |

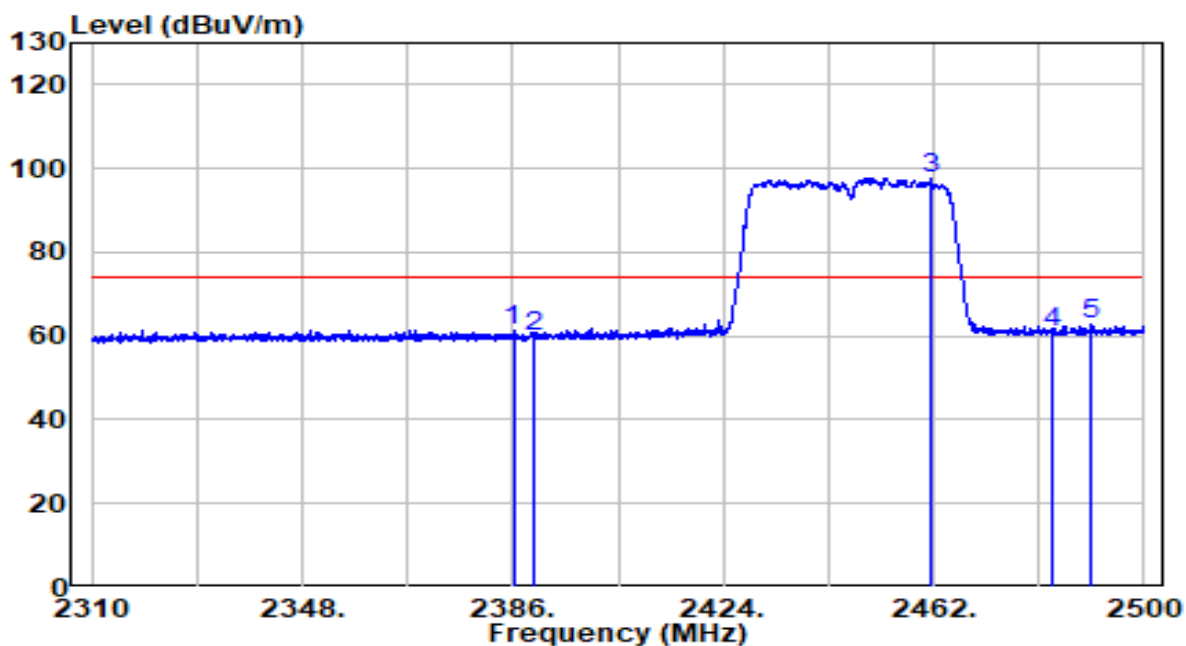


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | 2386.095        | 29.23          | 32.28    | 61.51                | -12.49      | 74.00          | Peak              |
| 2  | 2390.000        | 27.50          | 32.30    | 59.80                | -14.20      | 74.00          | Peak              |
| 3  | * 2461.525      | 65.24          | 32.61    | 97.85                | N/A         | N/A            | Peak              |
| 4  | 2483.500        | 28.34          | 32.71    | 61.05                | -12.95      | 74.00          | Peak              |
| 5  | 2490.215        | 29.97          | 32.74    | 62.71                | -11.29      | 74.00          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                        |                      |                 |
|-----------|--------------------------------------------------------|----------------------|-----------------|
| EUT       | AX6600 WI-FI 6 三頻電競路由器                                 | Date of Test         | 2020-05-16      |
| Factor    | BBHA 9120D                                             | Temp. / Humidity     | 17°C/51%        |
| Polarity  | Horizontal                                             | Site / Test Engineer | AC1 / Kevin Ker |
| Test Mode | Transmit by 802.11n-HT40 at channel 2447MHz (CDD Mode) | Test Voltage         | 110V/60Hz       |

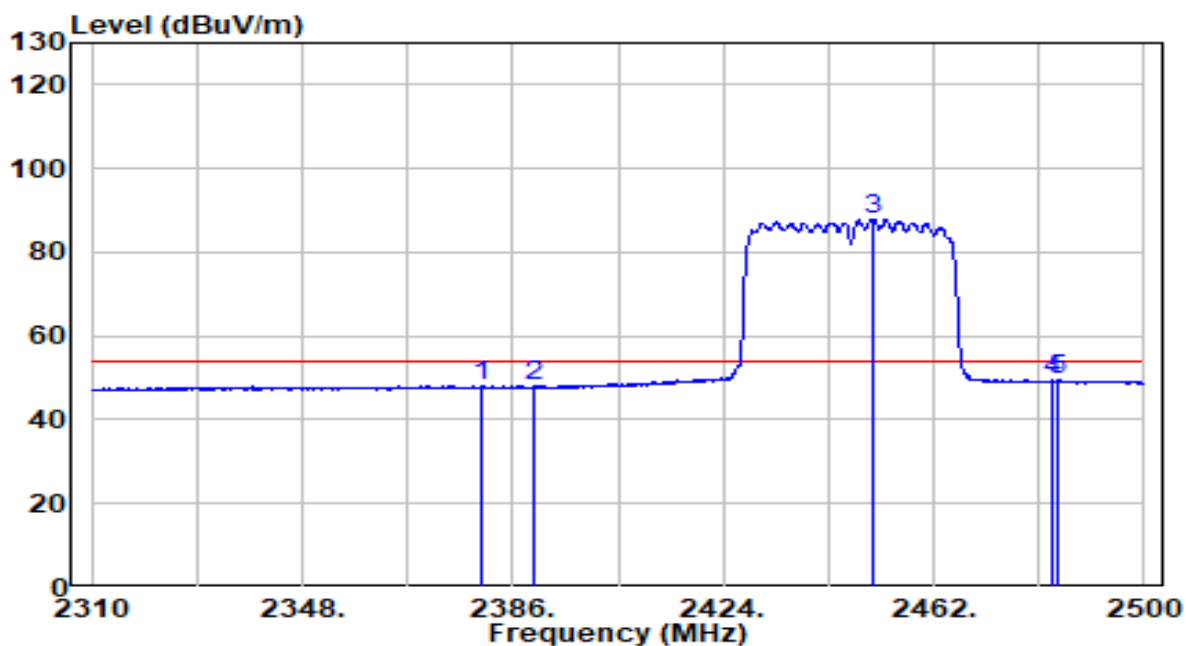


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | 2380.300        | 15.81          | 32.25    | 48.06                | -5.94       | 54.00          | Peak              |
| 2  | 2390.000        | 15.64          | 32.30    | 47.94                | -6.06       | 54.00          | Peak              |
| 3  | * 2451.075      | 55.35          | 32.56    | 87.91                | N/A         | N/A            | Peak              |
| 4  | 2483.500        | 16.67          | 32.71    | 49.38                | -4.62       | 54.00          | Peak              |
| 5  | 2484.610        | 16.71          | 32.71    | 49.42                | -4.58       | 54.00          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                        |                      |                 |
|-----------|--------------------------------------------------------|----------------------|-----------------|
| EUT       | AX6600 WI-FI 6 三頻電競路由器                                 | Date of Test         | 2020-05-16      |
| Factor    | BBHA 9120D                                             | Temp. / Humidity     | 17°C/51%        |
| Polarity  | Vertical                                               | Site / Test Engineer | AC1 / Kevin Ker |
| Test Mode | Transmit by 802.11n-HT40 at channel 2447MHz (CDD Mode) | Test Voltage         | 110V/60Hz       |

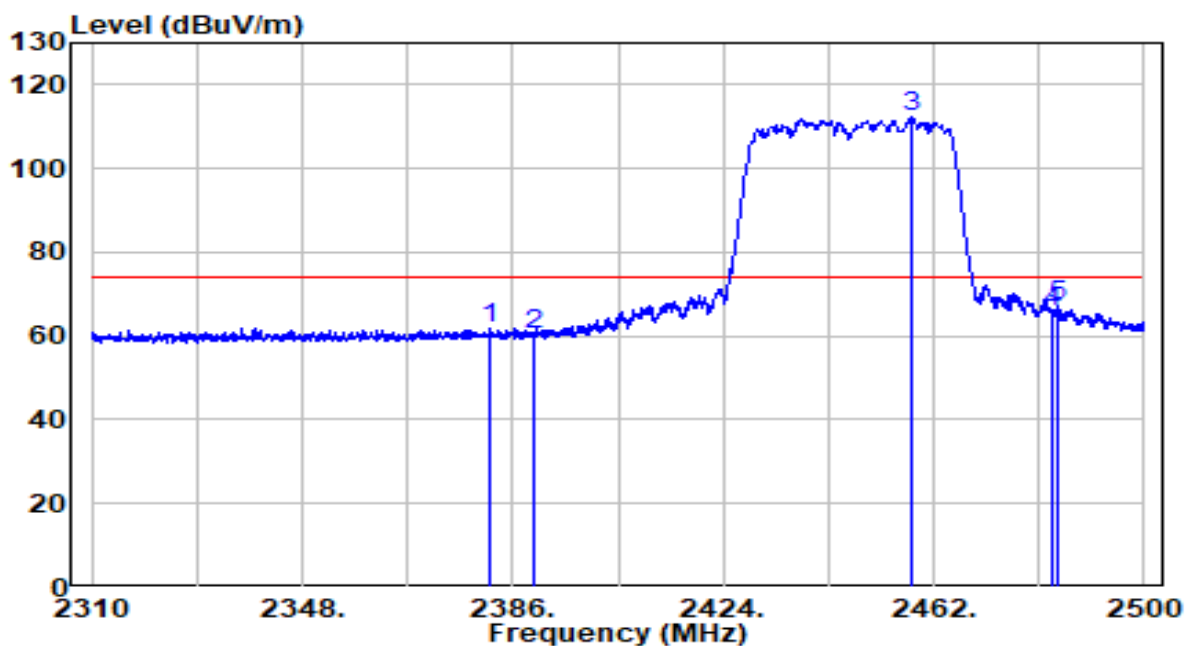


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | 2381.915        | 29.56          | 32.26    | 61.82                | -12.18      | 74.00          | Peak              |
| 2  | 2390.000        | 28.02          | 32.30    | 60.32                | -13.68      | 74.00          | Peak              |
| 3  | * 2458.200      | 79.50          | 32.60    | 112.10               | N/A         | N/A            | Peak              |
| 4  | 2483.500        | 33.06          | 32.71    | 65.77                | -8.23       | 74.00          | Peak              |
| 5  | 2484.515        | 34.66          | 32.71    | 67.37                | -6.63       | 74.00          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                        |                      |                 |
|-----------|--------------------------------------------------------|----------------------|-----------------|
| EUT       | AX6600 WI-FI 6 三頻電競路由器                                 | Date of Test         | 2020-05-16      |
| Factor    | BBHA 9120D                                             | Temp. / Humidity     | 17°C/51%        |
| Polarity  | Vertical                                               | Site / Test Engineer | AC1 / Kevin Ker |
| Test Mode | Transmit by 802.11n-HT40 at channel 2447MHz (CDD Mode) | Test Voltage         | 110V/60Hz       |

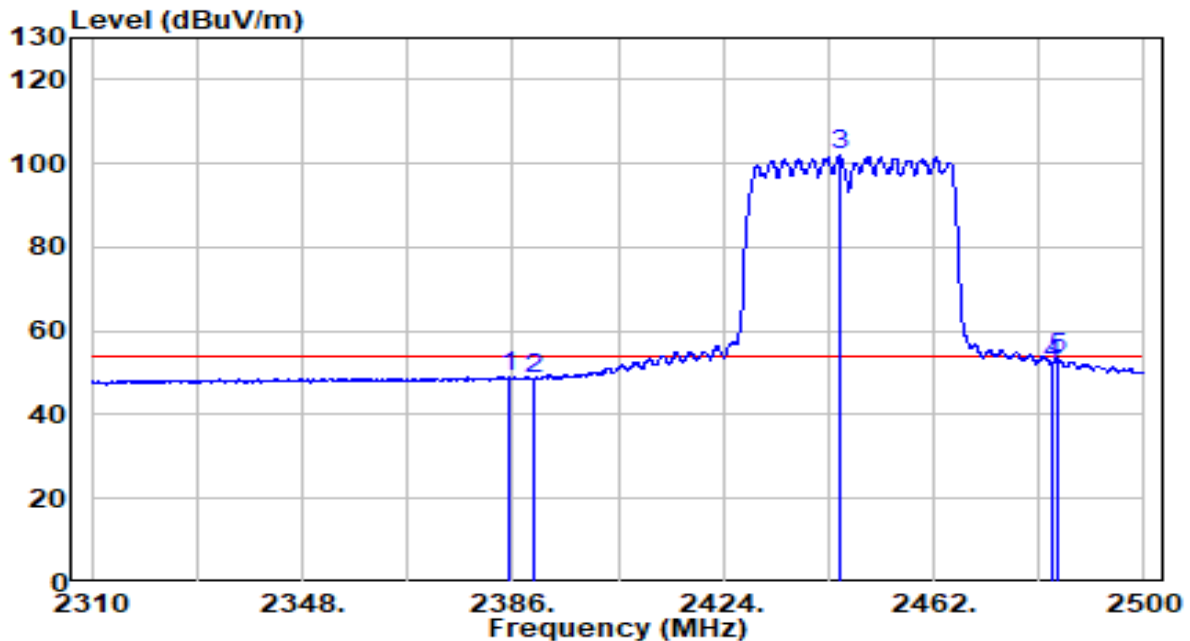


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | 2385.335        | 16.90          | 32.28    | 49.17                | -4.83       | 54.00          | Peak              |
| 2  | 2390.000        | 16.48          | 32.30    | 48.78                | -5.22       | 54.00          | Peak              |
| 3  | * 2444.995      | 69.36          | 32.54    | 101.90               | N/A         | N/A            | Peak              |
| 4  | 2483.500        | 19.26          | 32.71    | 51.97                | -2.03       | 54.00          | Peak              |
| 5  | 2484.515        | 20.87          | 32.71    | 53.58                | -0.42       | 54.00          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                        |                      |                 |
|-----------|--------------------------------------------------------|----------------------|-----------------|
| EUT       | AX6600 WI-FI 6 三頻電競路由器                                 | Date of Test         | 2020-05-16      |
| Factor    | BBHA 9120D                                             | Temp. / Humidity     | 17°C/51%        |
| Polarity  | Horizontal                                             | Site / Test Engineer | AC1 / Kevin Ker |
| Test Mode | Transmit by 802.11n-HT40 at channel 2452MHz (CDD Mode) | Test Voltage         | 110V/60Hz       |

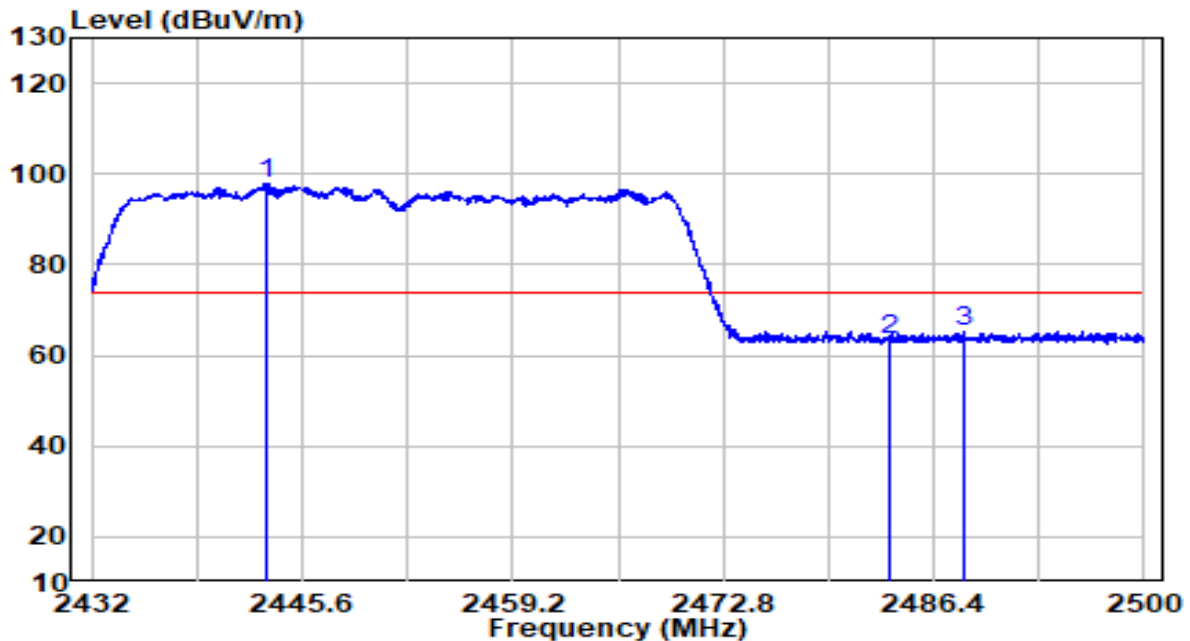


| No |   | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | * | 2443.322        | 65.46          | 32.53    | 97.99                | N/A         | N/A            | Peak              |
| 2  |   | 2483.500        | 30.76          | 32.71    | 63.47                | -10.53      | 74.00          | Peak              |
| 3  |   | 2488.372        | 32.66          | 32.73    | 65.39                | -8.61       | 74.00          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                        |                      |                 |
|-----------|--------------------------------------------------------|----------------------|-----------------|
| EUT       | AX6600 WI-FI 6 三頻電競路由器                                 | Date of Test         | 2020-05-16      |
| Factor    | BBHA 9120D                                             | Temp. / Humidity     | 17°C/51%        |
| Polarity  | Horizontal                                             | Site / Test Engineer | AC1 / Kevin Ker |
| Test Mode | Transmit by 802.11n-HT40 at channel 2452MHz (CDD Mode) | Test Voltage         | 110V/60Hz       |

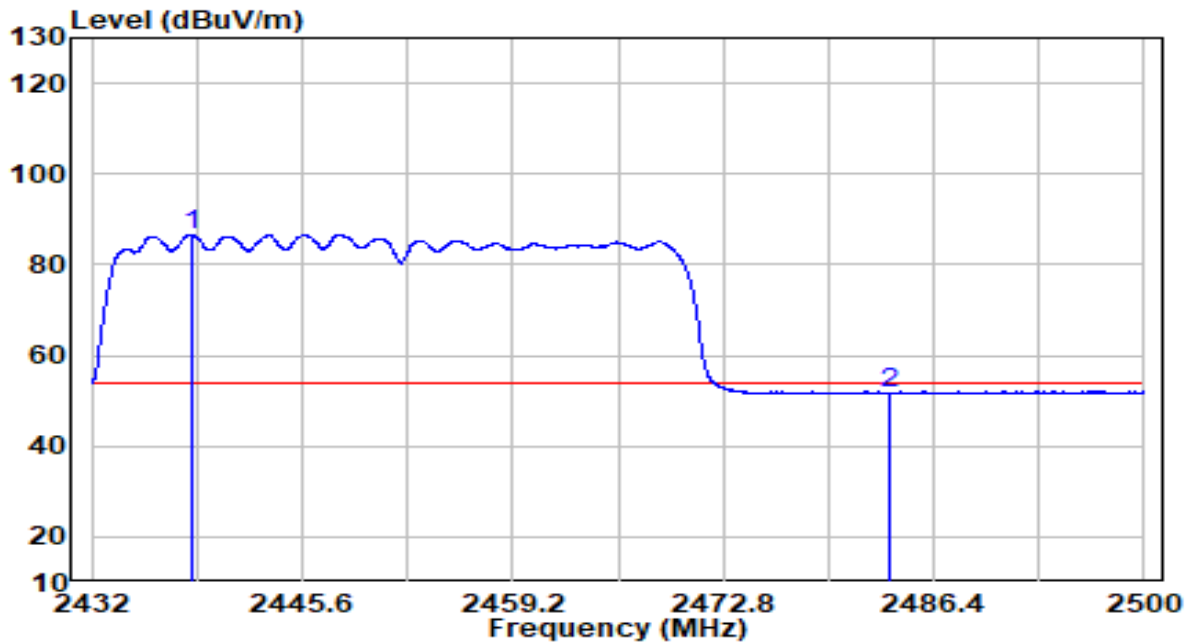


| No |   | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | * | 2438.460        | 54.19          | 32.51    | 86.70                | N/A         | N/A            | Peak              |
| 2  |   | 2483.500        | 18.95          | 32.71    | 51.66                | -2.34       | 54.00          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                        |                      |                 |
|-----------|--------------------------------------------------------|----------------------|-----------------|
| EUT       | AX6600 WI-FI 6 三頻電競路由器                                 | Date of Test         | 2020-05-16      |
| Factor    | BBHA 9120D                                             | Temp. / Humidity     | 17°C/51%        |
| Polarity  | Vertical                                               | Site / Test Engineer | AC1 / Kevin Ker |
| Test Mode | Transmit by 802.11n-HT40 at channel 2452MHz (CDD Mode) | Test Voltage         | 110V/60Hz       |

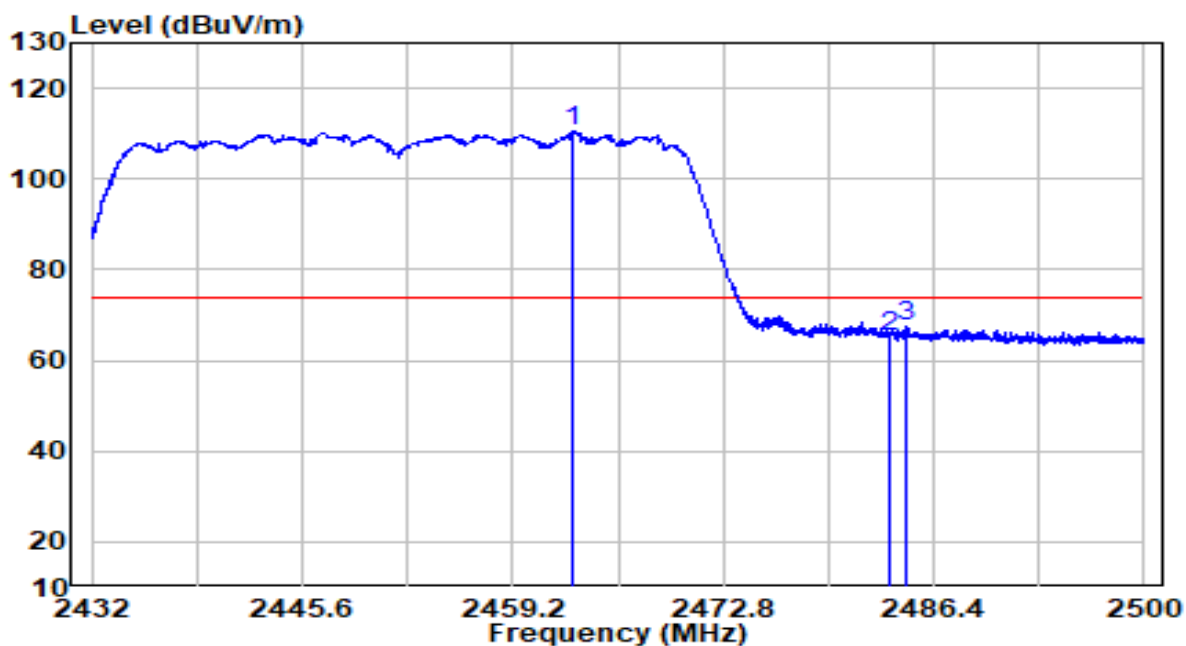


| No |   | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | * | 2463.144        | 77.69          | 32.62    | 110.31               | N/A         | N/A            | Peak              |
| 2  |   | 2483.500        | 32.67          | 32.71    | 65.38                | -8.62       | 74.00          | Peak              |
| 3  |   | 2484.598        | 34.92          | 32.71    | 67.64                | -6.36       | 74.00          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                        |                      |                 |
|-----------|--------------------------------------------------------|----------------------|-----------------|
| EUT       | AX6600 WI-FI 6 三頻電競路由器                                 | Date of Test         | 2020-05-16      |
| Factor    | BBHA 9120D                                             | Temp. / Humidity     | 17°C/51%        |
| Polarity  | Vertical                                               | Site / Test Engineer | AC1 / Kevin Ker |
| Test Mode | Transmit by 802.11n-HT40 at channel 2452MHz (CDD Mode) | Test Voltage         | 110V/60Hz       |

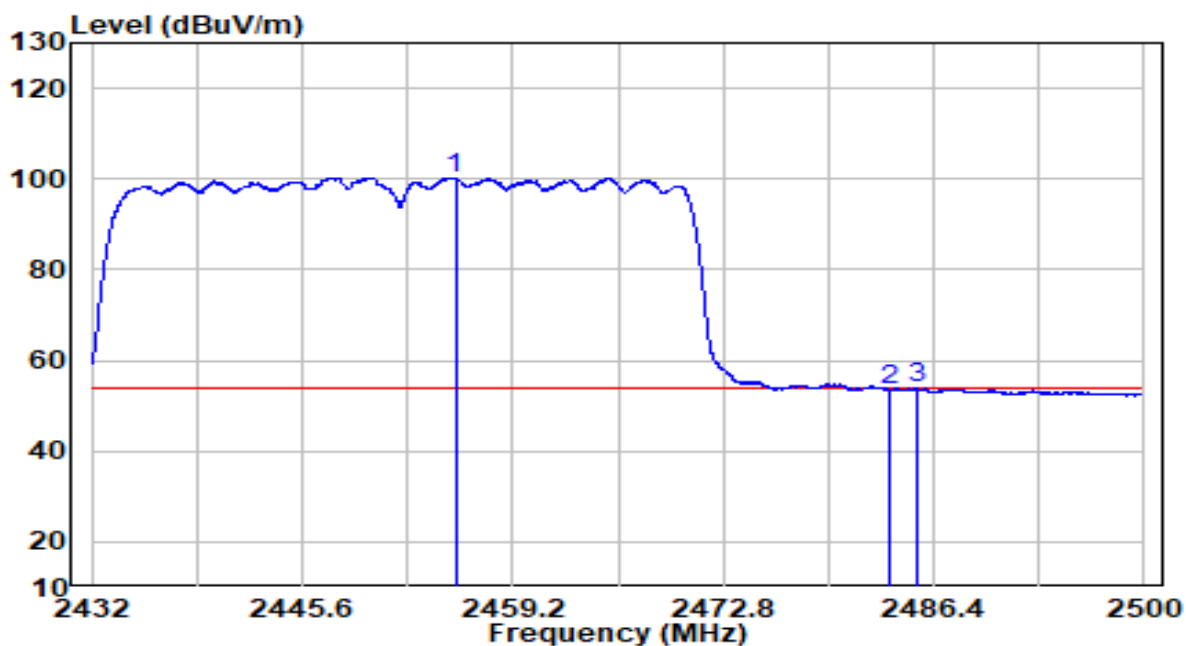


| No |   | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | * | 2455.494        | 67.74          | 32.58    | 100.33               | N/A         | N/A            | Peak              |
| 2  |   | 2483.500        | 20.86          | 32.71    | 53.56                | -0.44       | 54.00          | Peak              |
| 3  |   | 2485.380        | 21.16          | 32.72    | 53.88                | -0.12       | 54.00          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                          |                      |                 |
|-----------|----------------------------------------------------------|----------------------|-----------------|
| EUT       | AX6600 Wi-Fi 6 三頻電競路由器                                   | Date of Test         | 2020-06-02      |
| Factor    | BBHA 9120D                                               | Temp. / Humidity     | 25.3°C/70.9%    |
| Polarity  | Horizontal                                               | Site / Test Engineer | AC1 / Kevin Ker |
| Test Mode | Transmit by 802.11ax-HE20 at Channel 2412 MHz (CDD Mode) | Test Voltage         | 110V/60Hz       |

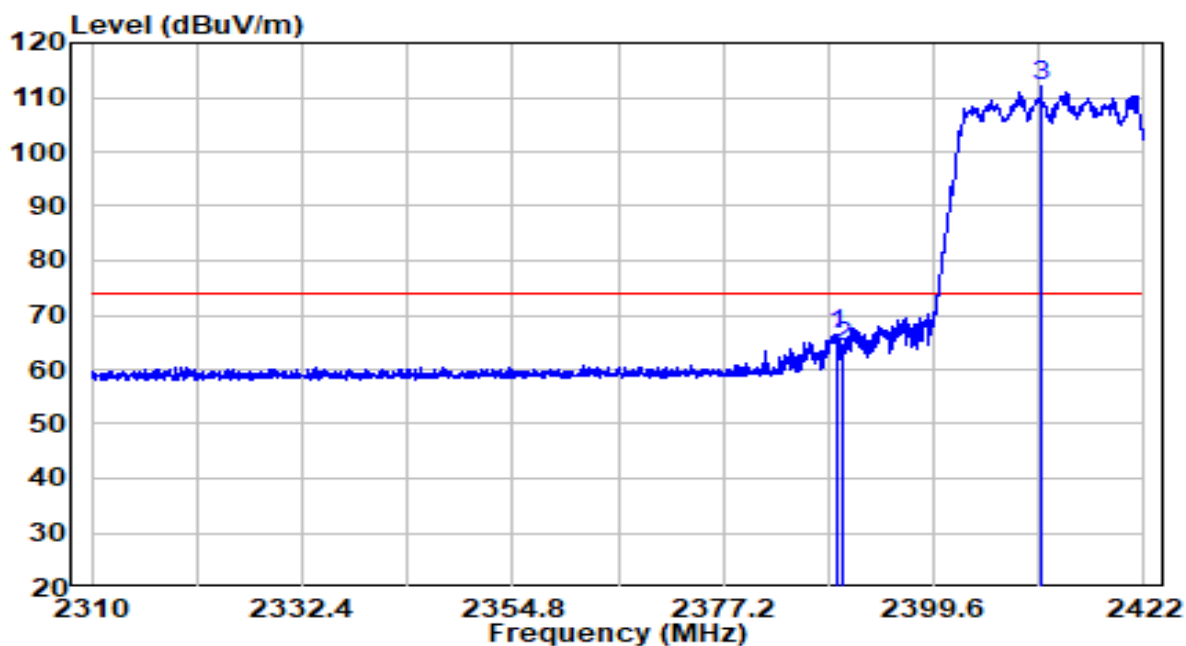


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | 2389.464        | 34.17          | 32.29    | 66.46                | -7.54       | 74.00          | Peak              |
| 2  | 2390.000        | 31.71          | 32.30    | 64.01                | -9.99       | 74.00          | Peak              |
| 3  | * 2411.024      | 79.75          | 32.39    | 112.14               | N/A         | N/A            | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                          |                      |                 |
|-----------|----------------------------------------------------------|----------------------|-----------------|
| EUT       | AX6600 Wi-Fi 6 三頻電競路由器                                   | Date of Test         | 2020-06-02      |
| Factor    | BBHA 9120D                                               | Temp. / Humidity     | 25.3°C/70.9%    |
| Polarity  | Horizontal                                               | Site / Test Engineer | AC1 / Kevin Ker |
| Test Mode | Transmit by 802.11ax-HE20 at Channel 2412 MHz (CDD Mode) | Test Voltage         | 110V/60Hz       |

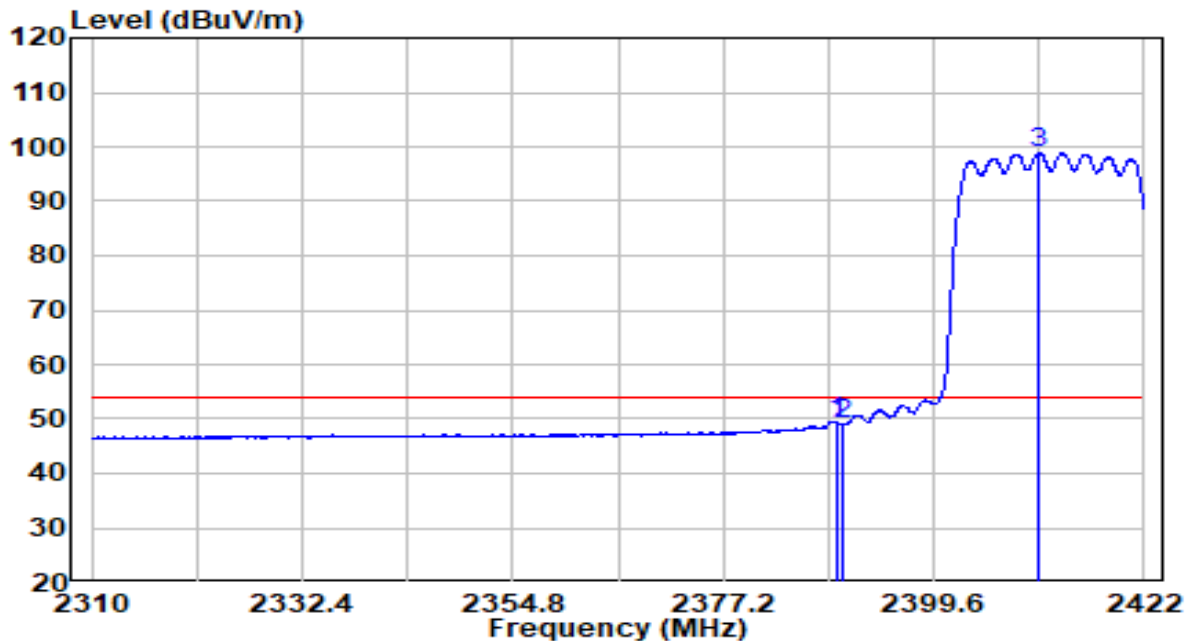


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | 2389.352        | 17.27          | 32.29    | 49.56                | -4.44       | 54.00          | Average           |
| 2  | 2390.000        | 16.74          | 32.30    | 49.04                | -4.96       | 54.00          | Average           |
| 3  | * 2410.856      | 66.43          | 32.39    | 98.82                | N/A         | N/A            | Average           |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                          |                      |                 |
|-----------|----------------------------------------------------------|----------------------|-----------------|
| EUT       | AX6600 Wi-Fi 6 三頻電競路由器                                   | Date of Test         | 2020-06-02      |
| Factor    | BBHA 9120D                                               | Temp. / Humidity     | 25.3°C/70.9%    |
| Polarity  | Vertical                                                 | Site / Test Engineer | AC1 / Kevin Ker |
| Test Mode | Transmit by 802.11ax-HE20 at Channel 2412 MHz (CDD Mode) | Test Voltage         | 110V/60Hz       |

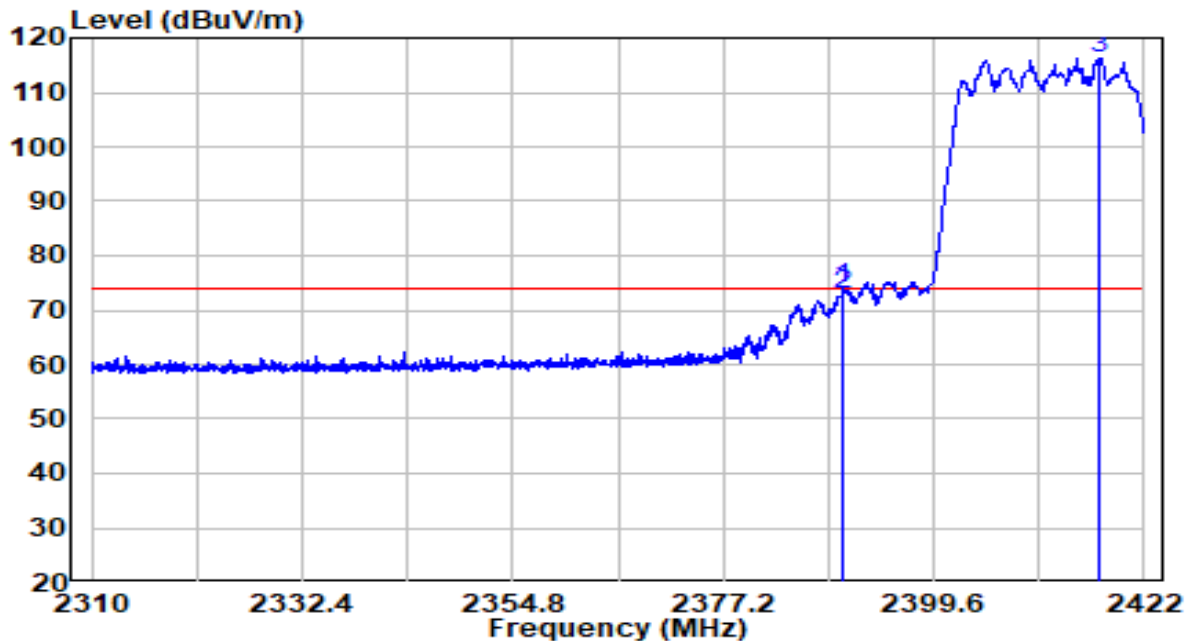


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | 2389.912        | 41.61          | 32.30    | 73.91                | -0.09       | 74.00          | Peak              |
| 2  | 2390.000        | 40.48          | 32.30    | 72.78                | -1.22       | 74.00          | Peak              |
| 3  | * 2417.240      | 83.73          | 32.42    | 116.15               | N/A         | N/A            | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                          |                      |                 |
|-----------|----------------------------------------------------------|----------------------|-----------------|
| EUT       | AX6600 Wi-Fi 6 三頻電競路由器                                   | Date of Test         | 2020-06-02      |
| Factor    | BBHA 9120D                                               | Temp. / Humidity     | 25.3°C/70.9%    |
| Polarity  | Vertical                                                 | Site / Test Engineer | AC1 / Kevin Ker |
| Test Mode | Transmit by 802.11ax-HE20 at Channel 2412 MHz (CDD Mode) | Test Voltage         | 110V/60Hz       |

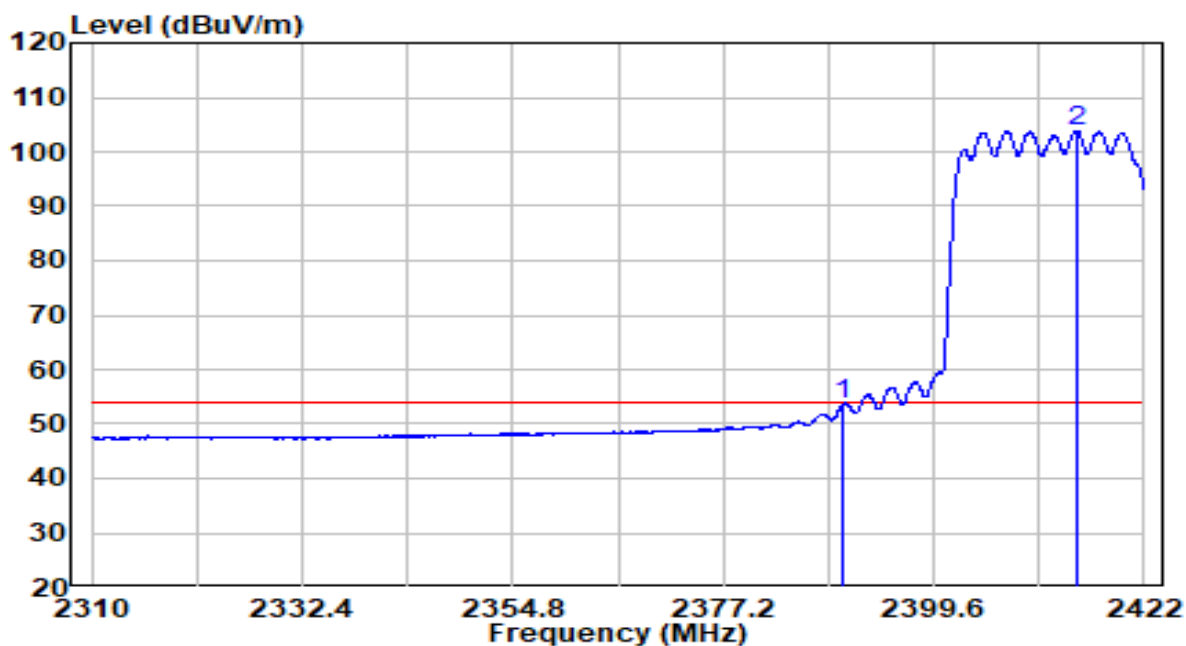


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | 2390.000        | 21.38          | 32.30    | 53.68                | -0.32       | 54.00          | Average           |
| 2  | * 2414.776      | 71.38          | 32.41    | 103.79               | N/A         | N/A            | Average           |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                          |                      |                 |
|-----------|----------------------------------------------------------|----------------------|-----------------|
| EUT       | AX6600 Wi-Fi 6 三頻電競路由器                                   | Date of Test         | 2020-06-02      |
| Factor    | BBHA 9120D                                               | Temp. / Humidity     | 25.3°C/70.9%    |
| Polarity  | Horizontal                                               | Site / Test Engineer | AC1 / Kevin Ker |
| Test Mode | Transmit by 802.11ax-HE20 at Channel 2417 MHz (CDD Mode) | Test Voltage         | 110V/60Hz       |

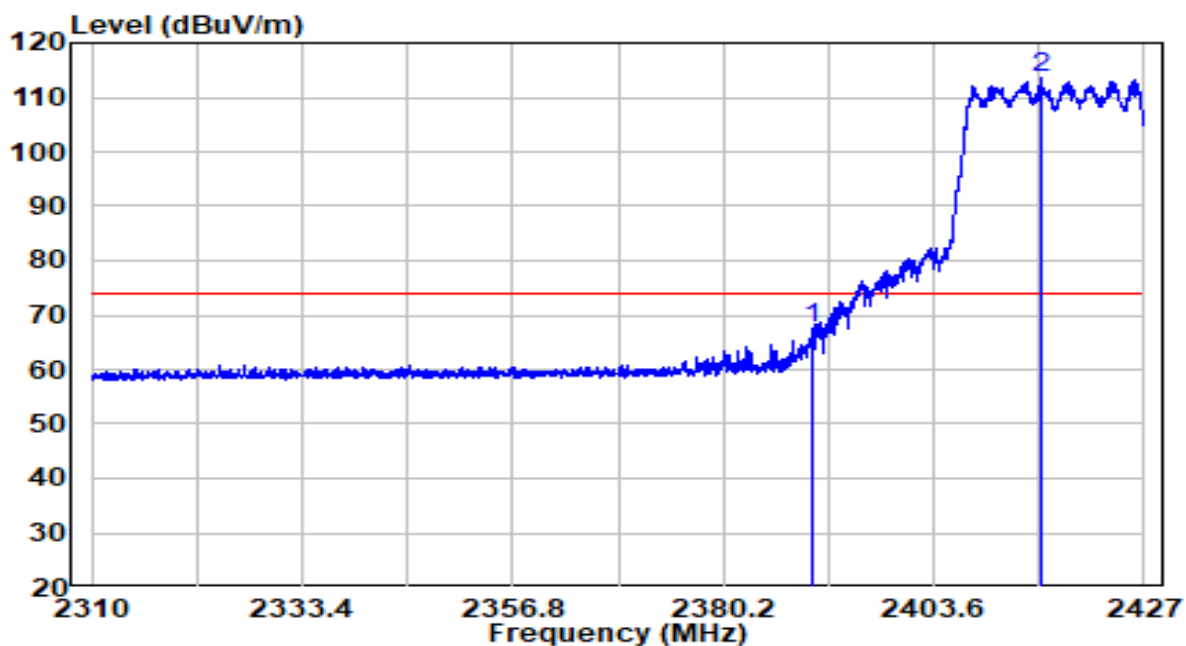


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | 2390.000        | 35.21          | 32.30    | 67.51                | -6.49       | 74.00          | Peak              |
| 2  | * 2415.476      | 81.33          | 32.41    | 113.74               | N/A         | N/A            | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                          |                      |                 |
|-----------|----------------------------------------------------------|----------------------|-----------------|
| EUT       | AX6600 Wi-Fi 6 三頻電競路由器                                   | Date of Test         | 2020-06-02      |
| Factor    | BBHA 9120D                                               | Temp. / Humidity     | 25.3°C/70.9%    |
| Polarity  | Horizontal                                               | Site / Test Engineer | AC1 / Kevin Ker |
| Test Mode | Transmit by 802.11ax-HE20 at Channel 2417 MHz (CDD Mode) | Test Voltage         | 110V/60Hz       |

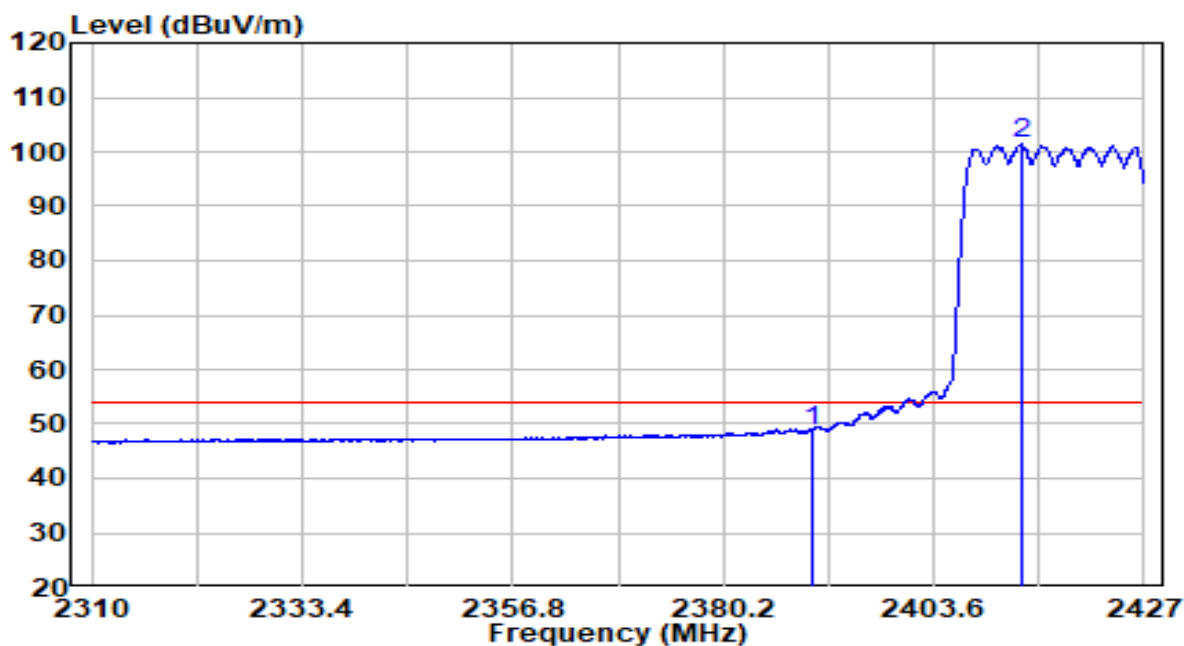


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | 2390.000        | 16.37          | 32.30    | 48.66                | -5.34       | 54.00          | Average           |
| 2  | * 2413.311      | 68.95          | 32.40    | 101.35               | N/A         | N/A            | Average           |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                          |                      |                 |
|-----------|----------------------------------------------------------|----------------------|-----------------|
| EUT       | AX6600 Wi-Fi 6 三頻電競路由器                                   | Date of Test         | 2020-06-02      |
| Factor    | BBHA 9120D                                               | Temp. / Humidity     | 25.3°C/70.9%    |
| Polarity  | Vertical                                                 | Site / Test Engineer | AC1 / Kevin Ker |
| Test Mode | Transmit by 802.11ax-HE20 at Channel 2417 MHz (CDD Mode) | Test Voltage         | 110V/60Hz       |

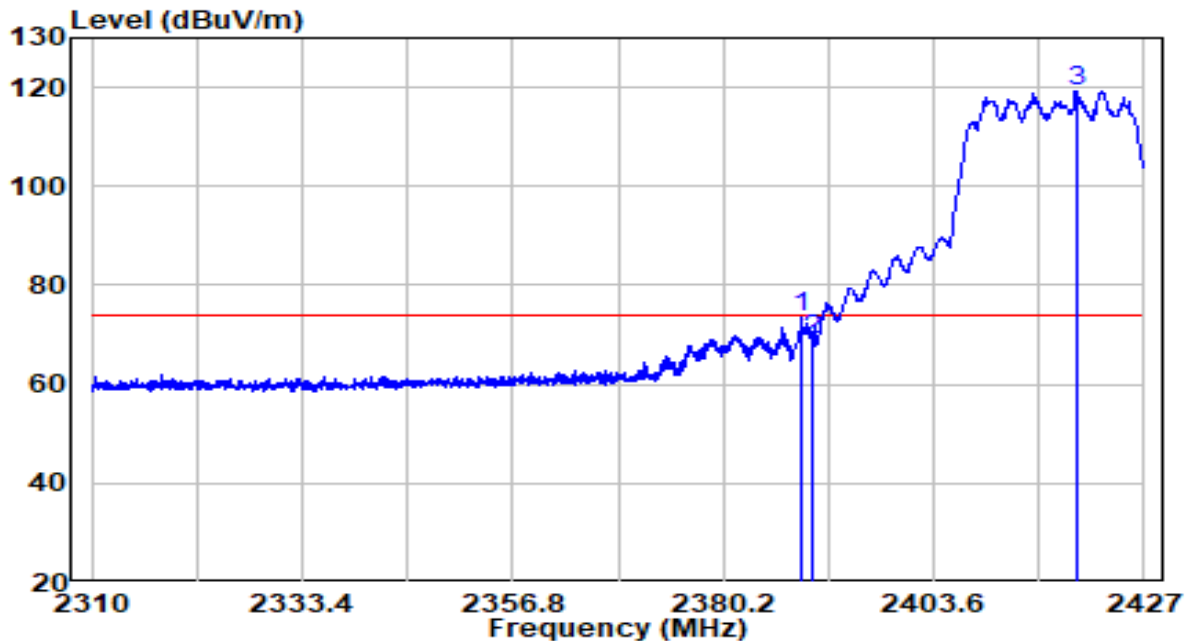


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | 2388.975        | 41.28          | 32.29    | 73.57                | -0.43       | 74.00          | Peak              |
| 2  | 2390.000        | 36.88          | 32.30    | 69.17                | -4.83       | 74.00          | Peak              |
| 3  | * 2419.629      | 86.79          | 32.43    | 119.22               | N/A         | N/A            | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                          |                      |                 |
|-----------|----------------------------------------------------------|----------------------|-----------------|
| EUT       | AX6600 Wi-Fi 6 三頻電競路由器                                   | Date of Test         | 2020-06-02      |
| Factor    | BBHA 9120D                                               | Temp. / Humidity     | 25.3°C/70.9%    |
| Polarity  | Vertical                                                 | Site / Test Engineer | AC1 / Kevin Ker |
| Test Mode | Transmit by 802.11ax-HE20 at channel 2417 MHz (CDD Mode) | Test Voltage         | 110V/60Hz       |

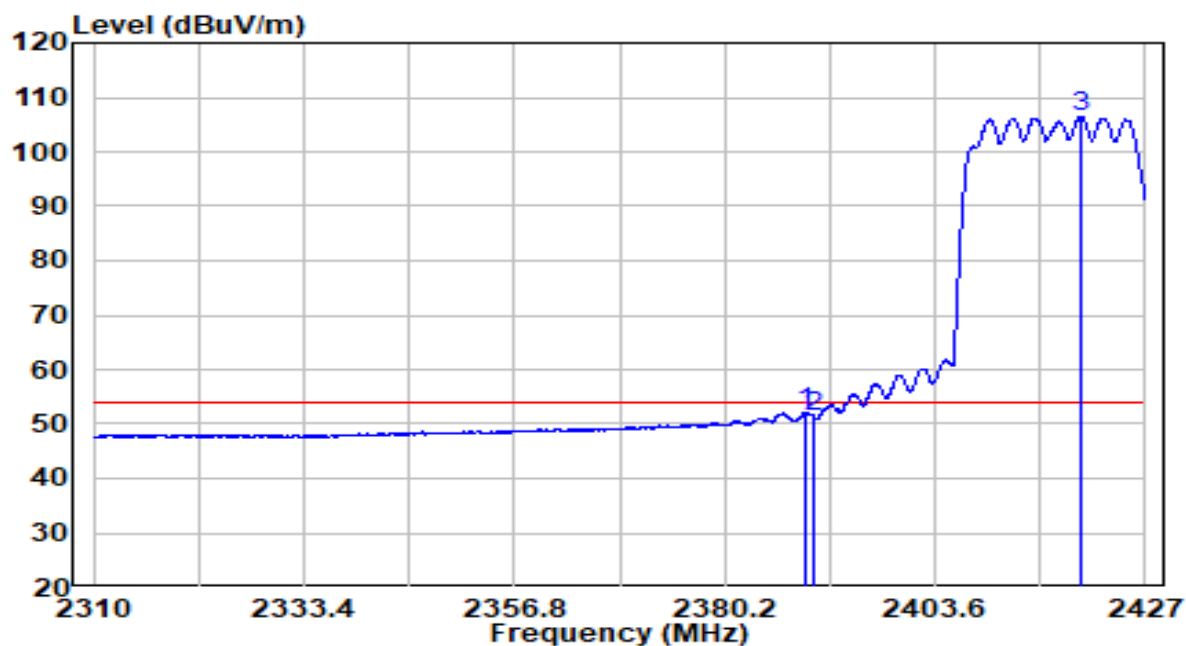


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | 2389.268        | 18.70          | 33.42    | 52.12                | -1.88       | 54.00          | Average           |
| 2  | 2390.000        | 18.06          | 33.42    | 51.48                | -2.52       | 54.00          | Average           |
| 3  | * 2419.804      | 72.86          | 33.68    | 106.54               | N/A         | N/A            | Average           |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                          |                      |                 |
|-----------|----------------------------------------------------------|----------------------|-----------------|
| EUT       | AX6600 Wi-Fi 6 三頻電競路由器                                   | Date of Test         | 2020-06-02      |
| Factor    | BBHA 9120D                                               | Temp. / Humidity     | 25.3°C/70.9%    |
| Polarity  | Horizontal                                               | Site / Test Engineer | AC1 / Kevin Ker |
| Test Mode | Transmit by 802.11ax-HE20 at Channel 2422 MHz (CDD Mode) | Test Voltage         | 110V/60Hz       |

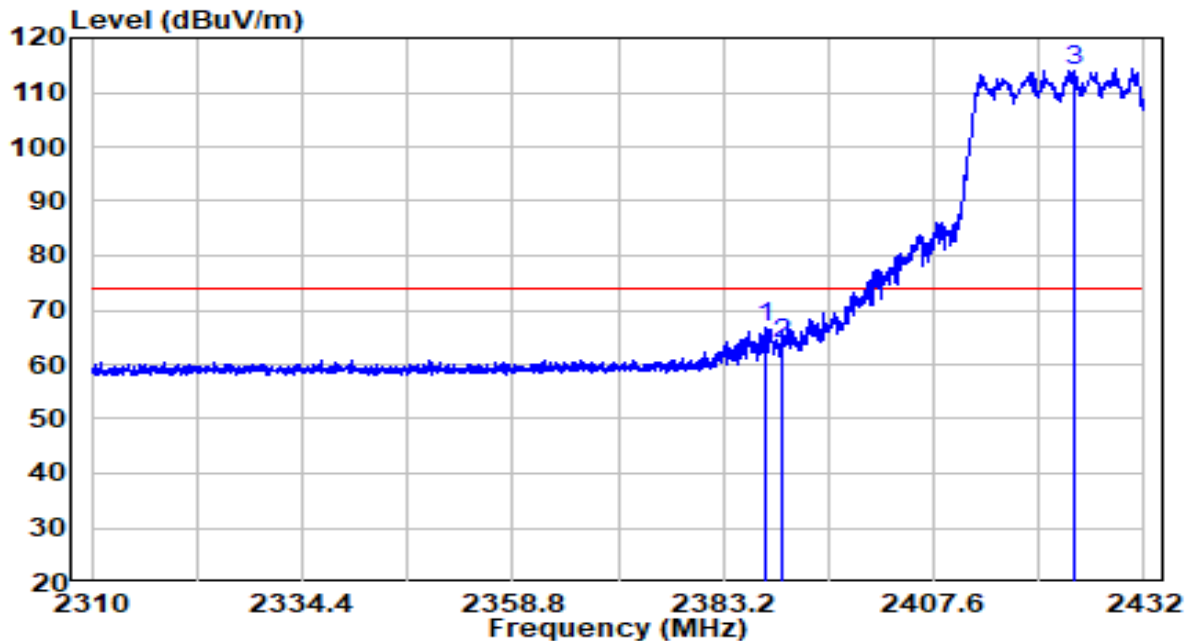

| No | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|----------------------|-------------|----------------|-------------------|
| 1  | 2388.202        | 34.64          | 32.29    | 66.92                | -7.08       | 74.00          | Peak              |
| 2  | 2390.000        | 31.29          | 32.30    | 63.59                | -10.41      | 74.00          | Peak              |
| 3  | * 2423.948      | 81.50          | 32.45    | 113.94               | N/A         | N/A            | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.