

TEST REPORT

Product Name: transmitter
Trademark: FLYDOG
Model Number: CS-X1, CS-M2, CS-M1, CS-S1, CS-O1, CS-N1, CS-A2-L, CS-A86, CS-O3, CS-S3, CS-F2, CS-L6
Prepared For: Xiamen Yunhu Software Development Co., Ltd.
Address: Room 503, No. 88, Jinhu Erli, Huli District, Xiamen City, Fujian Province, China
Manufacturer: Xiamen Yunhu Software Development Co., Ltd.
Address: Room 503, No. 88, Jinhu Erli, Huli District, Xiamen City, Fujian Province, China
Prepared By: Shenzhen CTB Testing Technology Co., Ltd.
Address: 1&2/F., Building A, No.26, Xinh Road, Xinqiao, Xinqiao Street, Bao'an District, Shenzhen, Guangdong, China
Sample Received Date: Aug. 22, 2025
Sample tested Date: Aug. 22, 2025 to Nov. 06, 2025
Issue Date: Nov. 06, 2025
Report No.: CTB25082202301RF01
Test Standards: MIC Notice No.88 Appendix No.22
Item 8 of Article 2 Paragraph 1
Test Results: PASS
Remark: This is 315MHz radio test report.

Compiled by:

Reviewed by:

Approved by:

Zhou Kui

Arron Liu



Zhou Kui

Arron Liu

Bin Mei / Director

Note: If there is any objection to the inspection results in this report, please submit a written report to the company within 15 days from the date of receiving the report. The test report is effective only with both signature and specialized stamp. This result(s) shown in this report refer only to the sample(s) tested. Without written approval of Shenzhen CTB Testing Technology Co., Ltd. this report can't be reproduced except in full. The tested sample(s) and the sample information are provided by the client. "*" indicates the testing items were fulfilled by subcontracted lab. "#" indicates the items are not in CNAS accreditation scope.

Table of Contents	Page
1 . TEST SUMMARY	4
2 . GENERAL INFORMATION	7
2.1 GENERAL DESCRIPTION OF EUT	7
2.2 Carrier Frequency of Channels	8
2.3 Table for Filed Antenna	8
2.4 DESCRIPTION OF TEST MODES	8
2.5 TESTCONDITIONS	9
2.6 DESCRIPTION OF SUPPORT UNITS(CONDUCTEDMODE)	9
2.7 MEASUREMENT INSTRUMENTS LIST	10
3 . RF SHIELDINGMETHOD	12
3.1 The photos of construction protection	12
4 ANTENNA POWER	13
4.1 LIMIT	13
4.2 Test Procedure	13
4.3 TEST SETUP LAYOUT	13
4.4 Environmental Conditions	14
4.5 TEST RESULT	14
5. Tolerance Of Occupied Bandwidth	15
5.1 Standard Applicable	15
5.2 Test Procedure	15
5.3 TEST SETUP LAYOUT	15
5.4 Environmental Conditions	15
5.5 TEST RESULT	16
6. Tolerance Of Unwanted Emission Intensity	17
6.1 Standard Applicable	17
6.2 Test Procedure	17
6.3 TEST SETUP LAYOUT	17
6.4 Environmental Conditions	18
6.5 TEST RESULT	18
7. Secondary Radiated Emission Strength	27
7.1 Standard Applicable	27
7.2 Test Procedure	27
7.3 TEST SETUP LAYOUT	27
7.4 Environmental Conditions	27

Table of Contents	Page
7.5 TEST RESULT	28
8. Transmission Time	32
8.1 Standard Applicable	32
8.2 Test Procedure	32
8.3 TEST SETUP LAYOUT	32
8.4 Environmental Conditions	32
8.5 TEST RESULT	33
9. Assigned frequency or designated frequency	34
9.1 Standard Applicable	34
9.2 Test Procedure	34
9.3 TEST SETUP LAYOUT	34
9.4 Environmental Conditions	34
9.5 TEST RESULT	35
10 Radio Interference Prevention Capability Measurement	36
10.1 Limit	36
10.2 Measuring ID code software	36
10.3 Test procedure	36
10.4 Test setup layout	36
10.5 EUT OPERATION DURING TEST	36
10.6 TEST RESULT	36
11. EUT TEST PHOTO	37



1. TEST SUMMARY

1.1 Version

Report No.	Issue Date	Description	Approved
CTB25082202301RF01	Nov. 06, 2025	Original	Valid

1.2 TEST PROCEDURES AND RESULTS

MIC Notice No.88 Appendix No.22			
Standard Section	Test Item	Judgment	Remark
General provisions			
Item 8	Antenna power	PASS	
Item 8	Tolerance of occupied bandwidth	PASS	
Item 8	Tolerance of unwanted emission intensity	PASS	
Item 8	Transmission time control	PASS	
Item 8	Assigned frequency or designated frequency	PASS	
Item 8	Interference Prevention Function	PASS	
Item 8	Secondary Radiated Emission Strength (EIRP)	PASS	

1.3 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the Product as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

Item	Uncertainty
Occupancy bandwidth	54.3kHz
Conducted output power above 1G	0.9dB
Conducted output power below 1G	0.9dB
Power Spectral Density, Conduction	0.9dB
Conduction spurious emissions	2.0dB
Out of band emission	2.0dB
3m chamber Radiated spurious emission(30MHz-1GHz)	4.6dB
3m chamber Radiated spurious emission(1GHz-18GHz)	5.1dB
3m chamber Radiated spurious emission(18GHz-40GHz)	3.4dB
Frequency Error	54.3Hz
Adjacent channel power below 1G	2.6dB
Adjacent channel power above 1G	2.8dB
Humidity uncertainty	5.5%
Temperature uncertainty	0.63℃
Frequency	1×10^{-7}

2. GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF EUT

Model(s):	CS-X1, CS-M2, CS-M1, CS-S1, CS-O1, CS-N1, CS-A2-L, CS-A86, CS-O3, CS-S3, CS-F2, CS-L6
Model Description:	All the model are the same circuit and RF module, only the color and appearance are different. Test sample model: CS-X1
Hardware Version:	CS-X1-N-V2.2
Software Version:	CS-X1-N-V2.2
Operation Frequency:	315MHz
Type of Modulation:	ASK
Rate Output power:	0.250mW
Antenna installation:	PCB antenna
Antenna Gain:	2.01dBi
Ratings:	DC 12V=23A by battery

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.
2. This report is for 315MHz test report.

2.2 Carrier Frequency of Channels

Channel	Frequency (MHz)
1	315

2.3 Table for Filed Antenna

Ant.	Brand	Model Name	Antenna Type	Gain(dBi)	NOTE
1	N/A	transmitter	PCB antenna	2.01dBi	N/A

2.4 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Mode	Description
Mode 1	TX
Mode 2	RX

2.5 TESTCONDITIONS

During the measurement the environmental conditions were within the listed ranges:

Supply Voltage					
	PC supply power V	Module input power V	Rated module power V	Tolerance (%)	
Normal	12	3.3	3.3		
+10%	13.2	3.3	3.3		0
-10%	10.8	3.3	3.3		0
Others					
Temperature (°C)		20-25			
Relative humidity		54 %.			
ATM Pressure:		1010 mbar			
Note 1: When the input voltage is reduced or increased by 10%, the regulator voltage changes of less than 1%. So the following test items are conducted in the normal voltage.					

BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

Mode 1:



2.6 DESCRIPTION OF SUPPORT UNITS(CONDUCTEDMODE)

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	Note
1	transmitter	FLYDOG	CS-X1, CS-M2, CS-M1, CS-S1, CS-O1, CS-N1, CS-A2-L, CS-A86, CS-O3, CS-S3, CS-F2, CS-L6	EUT

Item	Shielded Type	Ferrite Core	Length	Note

Note:

1. The support equipment was authorized by Declaration of Confirmation.
2. For detachable type I/O cable should be specified the length in cm in 『Length』 column.
3. "YES" is means "shielded" "with core"; "NO" is means "unshielded" "without core".

2.7 MEASUREMENT INSTRUMENTS LIST

No.	Equipment	Manufacturer	Type No.	Serial No.	Firmware Version	Calibrated until
1	Spectrum Analyzer	Agilent	N9020A	MY52090073	A.14.16	2026/6/27
2	Power Sensor	Agilent	U2021XA	MY56120032	/	2026/6/27
3	Power Sensor	Agilent	U2021XA	MY56120034	/	2026/6/27
4	Communication test set	R&S	CMW500	108058	V3.5.80	2026/6/27
5	Spectrum Analyzer	KEYSIGHT	N9020A	MY51289897	A.14.16	2026/6/27
6	Signal Generator	Agilent	N5181A	MY50140365	A.01.60	2026/6/27
7	Vector signal generator	Agilent	N5182A	MY47420195	A.01.87	2026/6/27
8	Communication test set	Agilent	E5515C	MY50102567	B.19.07 (E1962B)	2026/6/27
9	2.4 GHz Filter	Shenxiang	MSF2400-24 83.5MS-1154	20181015001	/	2026/6/29
10	5 GHz Filter	Shenxiang	MSF5150-58 50MS-1155	20181015001	/	2026/6/29
11	Filter	Xingbo	XBLBQ-DZA 120	190821-1-1	/	2026/6/29
12	BT&WI-FI Automatic test software	Microwave	MTS8310	Ver. 2.0.0.0	/	/
13	Rohde & Schwarz SFU Broadcast Test System	R&S	SFU	101017	/	2026/6/27
14	Temperature humidity chamber	Hongjing	TH-80CH	DG-15174	/	2026/6/27
15	234G Automatic test software	Microwave	MTS8200	Ver. 2.0.0.0	/	/
16	966 chamber	C.R.T.	966	/	/	2027/6/21
17	Receiver	R&S	ESPI	100362	RF_ATTEN_7 (104489/003)	2026/6/27
18	Amplifier	HP	8447E	2945A02747	/	2026/6/27

19	Amplifier	Agilent	8449B	3008A01838	/	2026/6/27
20	TRILOG Broadband Antenna	Schwarzbeck	VULB 9168	00869	/	2026/6/27
21	Double Ridged Broadband Horn Antenna	Schwarzbeck	BBHA9120D	01911	/	2026/6/27
22	EMI test software	Fala	EZ-EMC	FA-03A2 RE	/	/
23	Loop Antenna	Schwarzbeck	FMZB 1519B	1519B-224	/	2026/6/27
24	loop antenna	ZHINAN	ZN30900A	GTS534	/	/
25	40G Horn antenna	A/H/System	SAS-574	588	/	2026/6/27
26	Amplifier	AEROFLEX	Aeroflex	097	/	2026/6/27
27	Power Meter	KEYSIGHT	N1912AP	N/A	A.05.00	2026/6/27
28	DC power supply	Agilent	E3640A	MY53050046	/	2026/6/27

Remark: Calibration institution "GRG METROLOGY & TEST GROUP Co., LTD."

3. RF SHIELDINGMETHOD


We apply the product for Japan RF certification. The high-frequency section and modulation section of the radio equipment except for the antenna system shall not be capable of being opened easily.

Confirmation method

☐	Sealed with special screws.
☐	Plastic chassis is being welded using ultrasonic wavs.
☐	Chassis is glued using a special adhesive.
☐	Metal covers are spot-fused.
☐	Cover is specially interlocked.
☐	RF and Modulation components are covered with shielding case and this shielding case is soldered.
☐	Shield case is welded ant RF and modulations parts, and ID-ROM is welded using BGA Method.
☐	Shield case is welded ant RF and modulations parts, and ID-ROM is glued at its lead with a special adhesive.
☐	Shield case is welded ant RF and modulations parts, and ID-ROM is glued with a non-transparent laminating agent.
☒	Other: All RF and modulation section packet in one IC, and IC is welded using SMT Method, and RF module is welded on the main board, end-User can't open it easily.

3.1 The photos of construction protection

The red circle is welding point.

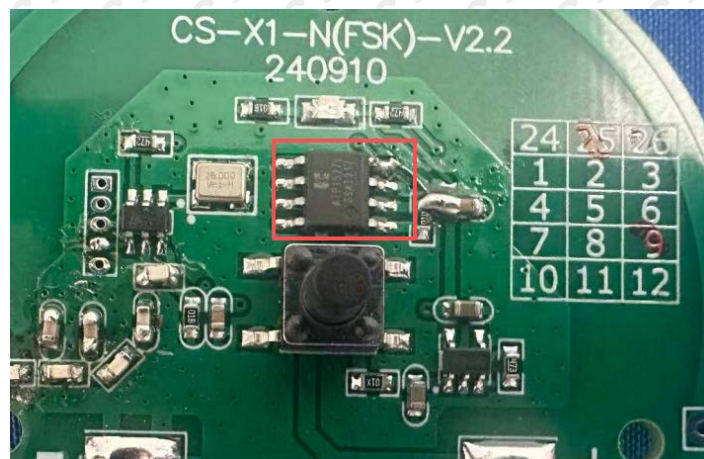

4 ANTENNA POWER

4.1 LIMIT

According to Item 8 of Article 2 Paragraph 1, the maximum permit antenna power is

Over 312 MHz to 315.05 MHz: 250 μ W or less

Over 315.05 MHz to 315.25 MHz: 25 μ W or less


Tolerance: Upper limit: +20%, Lower limit: Not specified.

4.2 Test Procedure


1. EUT have transmitted the maximum modulation signal and fixed channelize.
2. Setting of SA is following as: Below 1GHz RB: 100kHz / VB:100kHz
Above 1GHz RB: 1MHz / VB: 1MHz / AT: 10dB Ref: 0dBm / Sweep time: Auto
Sweep Mode: Continuous sweep / Detect mode: Positive peak
Trace mode: Max hold
3. Setting of SA is following as 312MHz and stop frequency 315MHz Then to mark peak reading value + Factor shall be less than 250nW.
4. Antenna Power Error is definition that actual measure antenna power tolerance between + 20% to - 100% power range that base on manufacturer declare the EIRP.

4.3 TEST SETUP LAYOUT

For EUT radiation measurement

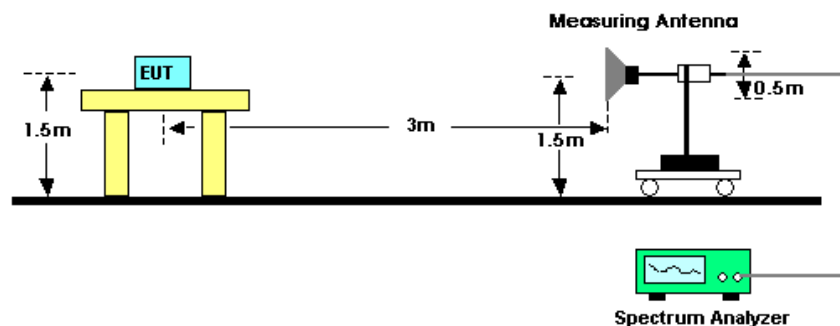

For standard antenna measurement

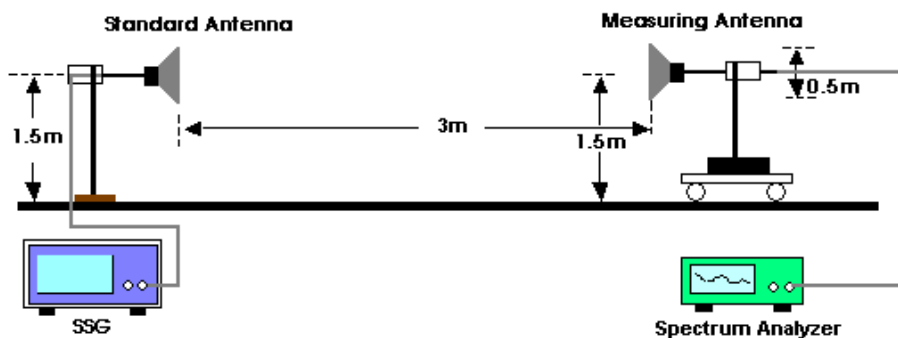

4.4 Environmental Conditions

Temperature:	23°C
Relative Humidity:	54%
ATM Pressure:	101kPa

4.5 TEST RESULT

Test Voltage (V)	Frequency (MHz)	Measure Value (dBm)	Antenna Gain (dBi)	EIRP (dBm)	EIRP (mW)	EIRP Limit (mW)
Normal Voltage	315	-8.12	2.01	-6.11	0.245	0.250

Test Voltage (V)	Frequency (MHz)	Antenna Power (mW)	Rated Output Power (mW)	Tolerance (%)	Limit (%)
Normal Voltage	315	0.245	0.250	-2.04	<+20%

5. Tolerance Of Occupied Bandwidth


5.1 Standard Applicable

According to Item 8 of Article 2 Paragraph 1, the occupied bandwidth is 1MHz or less.

5.2 Test Procedure

1. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
2. Set center frequency of spectrum analyzer = operating frequency.
3. Set the spectrum analyzer as RBW=1kHz, VBW=3kHz, Span=50MHz.
- 4 'Maximum Hold' mode may be used to accumulate the measurement result over several scans provided emission is repetitive in nature.
5. Repeat above procedures until all frequency measured was complete.

5.3 TEST SETUP LAYOUT

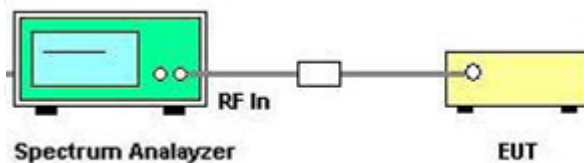


5.4 Environmental Conditions

Temperature:	23°C
Relative Humidity:	54%
ATM Pressure:	101kPa

5.5 TEST RESULT

Test Voltage (V)	Test Frequency (MHz)	99% Bandwidth (kHz)	Limit (kHz)	Result
Normal Voltage	315	8.418	1000	Pass

Normal Voltage

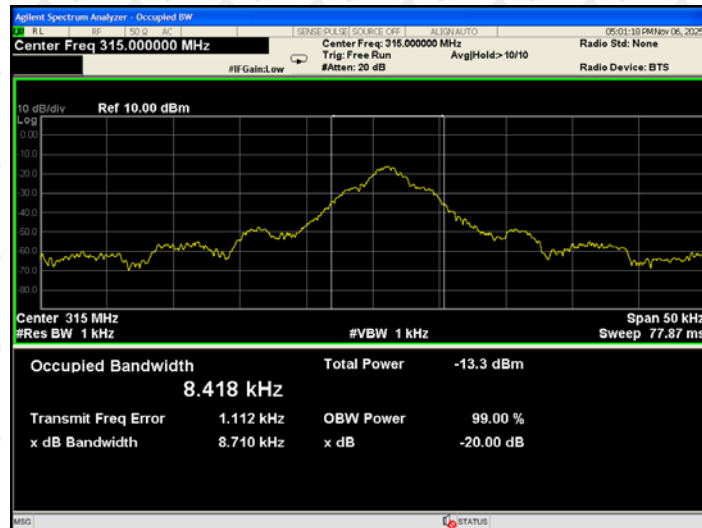

6. Tolerance Of Unwanted Emission Intensity

6.1 Standard Applicable

According to Item 8 of Article 2 Paragraph 1. The transmitter spurious emissions shall not exceeded the following limit:


- (1) 1GHz or lower: 250 nW/100 kHz or less
- (2) Over 1 GHz: 1 μ W/1MHz or less

6.2 Test Procedure


1. EUT have transmitted the maximum modulation signal and fixed channelize.
2. Setting of SA is following as: Below 1GHz RB: 100kHz / VB: 100kHz
Above 1GHz RB: 1MHz / VB: 1MHz / AT: 10dB Ref: 0dBm / Sweep time: Auto
Sweep Mode: Continuous sweep / Detect mode: Positive peak
Trace mode: Max hold
3. Setting of SA is following as 312MHz and stop frequency 315MHz Then to mark peak reading value + Factor shall be less than 250nW.
4. Antenna Power Error is definition that actual measure antenna power tolerance between + 20% to - 100% power range that base on manufacturer declare the EIRP.

6.3 TEST SETUP LAYOUT

For EUT radiation measurement

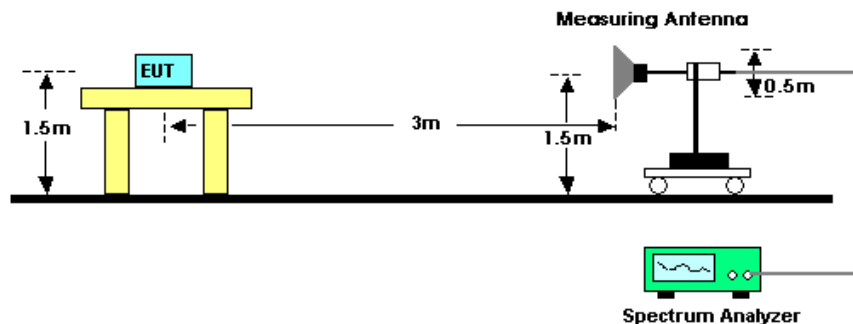

For standard antenna measurement

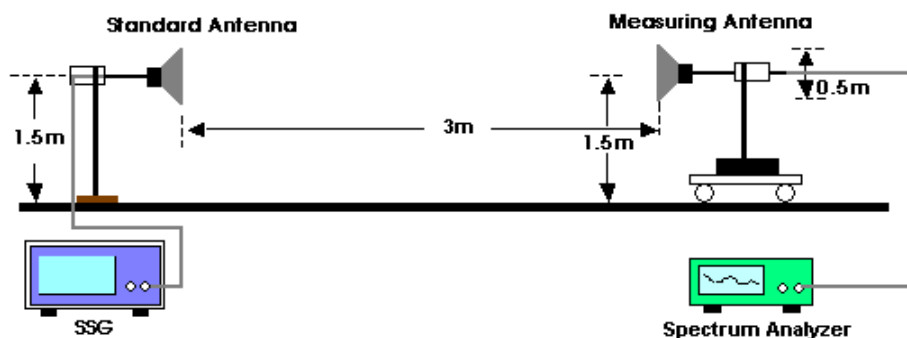

6.4 Environmental Conditions

Temperature:	23°C
Relative Humidity:	54%
ATM Pressure:	101kPa

6.5 TEST RESULT

Transmitter Spurious Emissions

Frequency Range (MHz)	Maximum Spurious Emission Value (dBm)		Limit (dBm)
Normal Voltage			
30-1000	Horizontal	-65.16	-36 (250 nW)
	Vertical	-66.47	-36 (250 nW)
1000-6000	Horizontal	-58.15	-30 (1 μW)
	Vertical	-57.46	-30 (1 μW)


30-1000 MHz

Horizontal:



No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dB	Over dB	Detector
1	*	314.3763	-15.62	2.64	-12.98	-36.00	23.02	peak
2		633.9071	-73.36	8.20	-65.16	-36.00	-29.16	peak
3		965.5420	-77.42	14.75	-62.67	-36.00	-26.67	peak


Vertical:

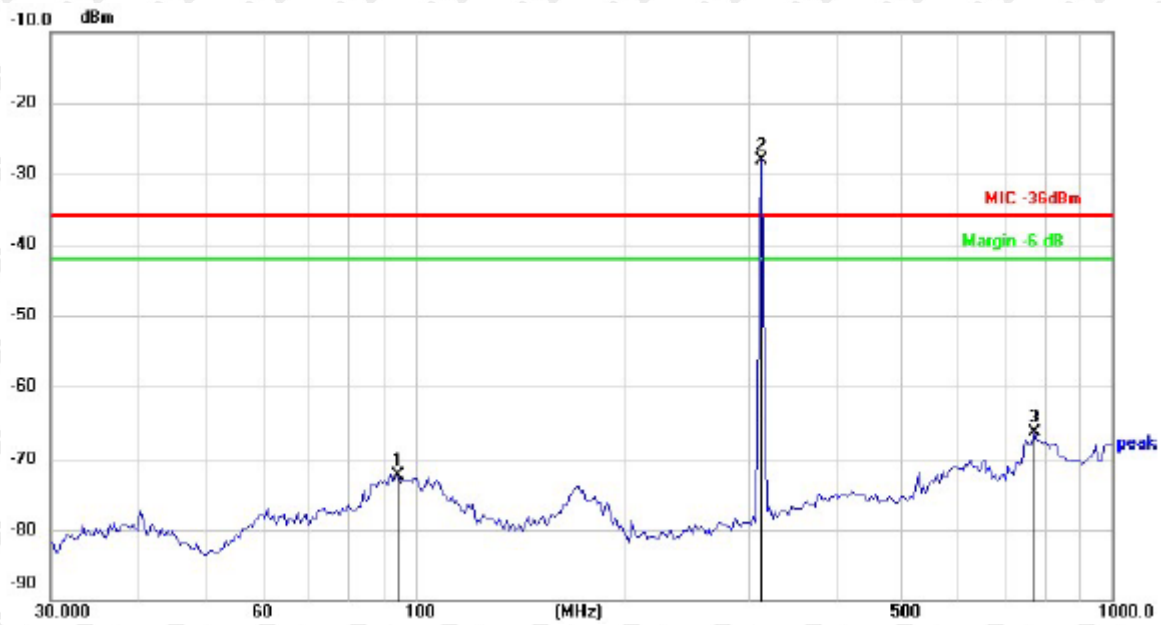

No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dB	Over dB	Detector
1		94.5939	-79.82	7.50	-72.32	-36.00	-36.32	peak
2	*	314.3763	-30.28	2.19	-28.09	-36.00	7.91	peak
3		775.5167	-77.78	11.31	-66.47	-36.00	-30.47	peak


1000-6000 MHz

Horizontal:

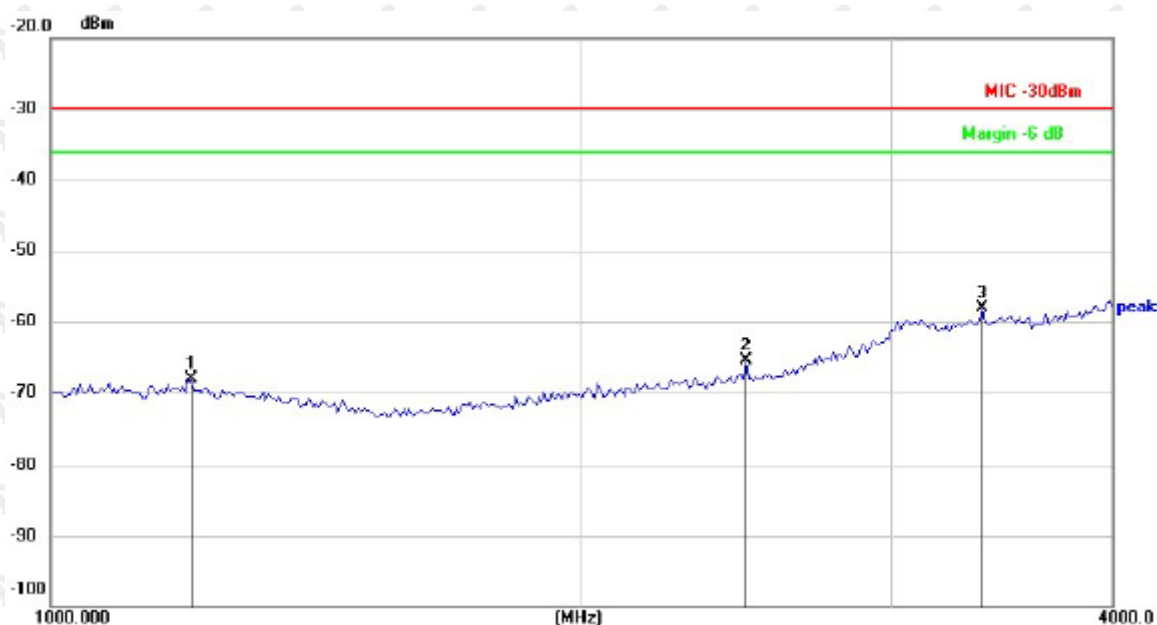

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	
		MHz	Level	Factor	ment			Detector
			dBm	dB	dBm	dB	dB	
1		1197.479	-68.65	0.65	-68.00	-30.00	-38.00	peak
2		2479.415	-72.27	6.78	-65.49	-30.00	-35.49	peak
3	*	3375.263	-68.73	10.58	-58.15	-30.00	-28.15	peak

Vertical:

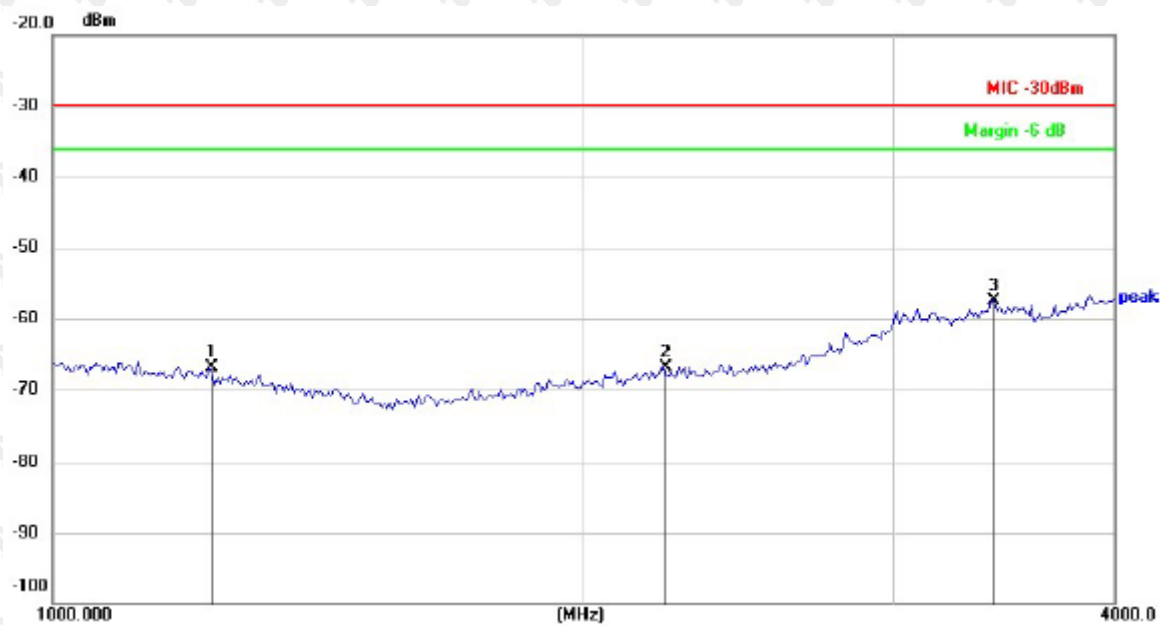

No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dB	Over dB	Detector
1		1226.885	-69.45	2.52	-66.93	-30.00	-36.93	peak
2		2219.139	-73.19	6.39	-66.80	-30.00	-36.80	peak
3	*	3422.380	-68.88	11.42	-57.46	-30.00	-27.46	peak

Band-Edge emission

300-312 MHz

Horizontal:



No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dB	Over dB	Detector
1		307.8670	-64.65	2.66	-61.99	-36.00	-25.99	peak
2	*	312.0000	-50.91	2.65	-48.26	-36.00	-12.26	peak

Vertical:



No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dB	Over dB	Detector
1		307.1133	-64.51	1.92	-62.59	-36.00	-26.59	peak
2	*	312.0000	-51.68	2.10	-49.58	-36.00	-13.58	peak


315.25-320MHz

Horizontal:



No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBm	dB	dBm	dB	dB	Detector
1	*	315.2500	-39.91	2.64	-37.27	-36.00	-1.27	peak
2		316.7266	-54.31	2.63	-51.68	-36.00	-15.68	peak

Vertical:

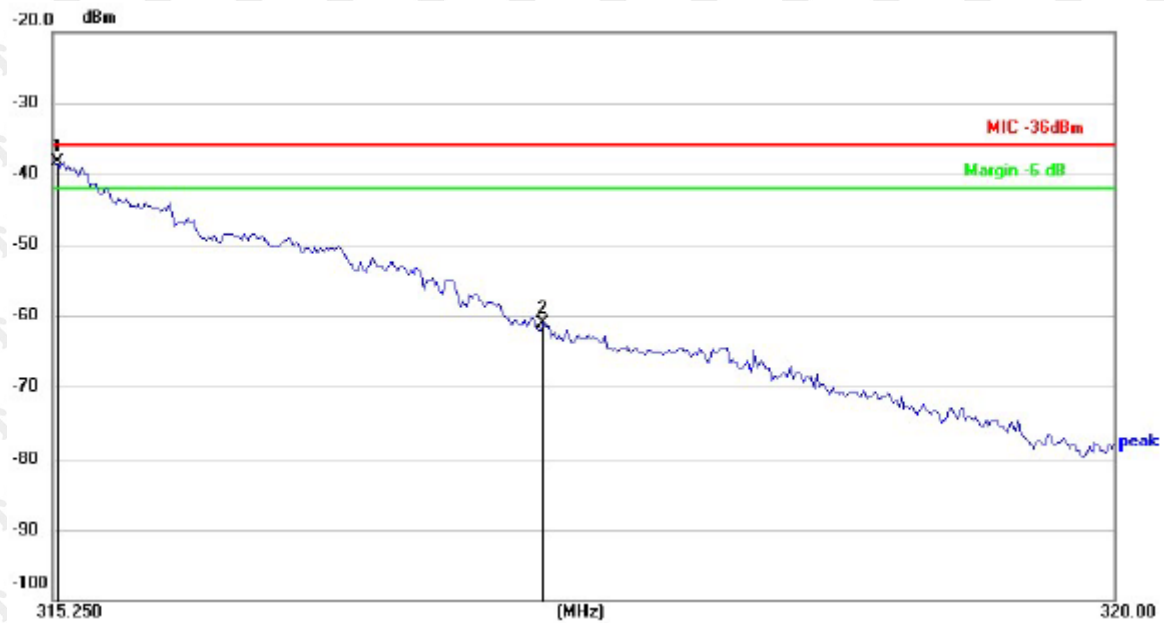

No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dB	Over dB	Detector
1	*	315.2618	-40.53	2.23	-38.30	-36.00	-2.30	peak
2		317.4380	-63.47	2.31	-61.16	-36.00	-25.16	peak

7. Secondary Radiated Emission Strength

7.1 Standard Applicable

According to Item 8 of Article 2 Paragraph 1. the transmitter shall be complied the following requirements:


The secondary radiated emission shall not exceed the following limit:

- (1) 1GHz or lower: 4 nW/100 kHz (-54dBm) or less
- (2) Over 1 GHz: 4 nW /1MHz (-54dBm) or less

7.2 Test Procedure

- (1) The measurement equipment shall be set for peak hold mode of operation.
- (2) The resolution bandwidth shall be set to 100 kHz from 10MHz to 1GHz, the resolution bandwidth shall be set to 1MHz above 1GHz, and the sweep time shall be set to auto mode, to ensure all major modulation products are captured.
- (3) When the searched result is less than the specified limit, the maximum one shall be recorded, when the result is more than the specified limit, all measured values shall be recorded.
- (4) This measurement shall be repeated with the transmitter in standby mode where applicable.
- (5) In addition, varying from 1m to 4m between the degrees of antenna height above ground for the measurement, find the position to adjust the orientation of the antenna for the measurement, power becomes the maximum.

7.3 TEST SETUP LAYOUT

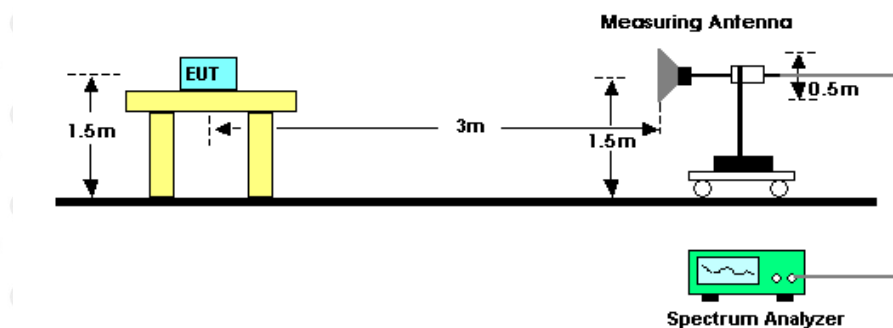


7.4 Environmental Conditions

Temperature:	23°C
Relative Humidity:	54%
ATM Pressure:	101kPa

7.5 TEST RESULT


30-100MHz:

Horizontal:

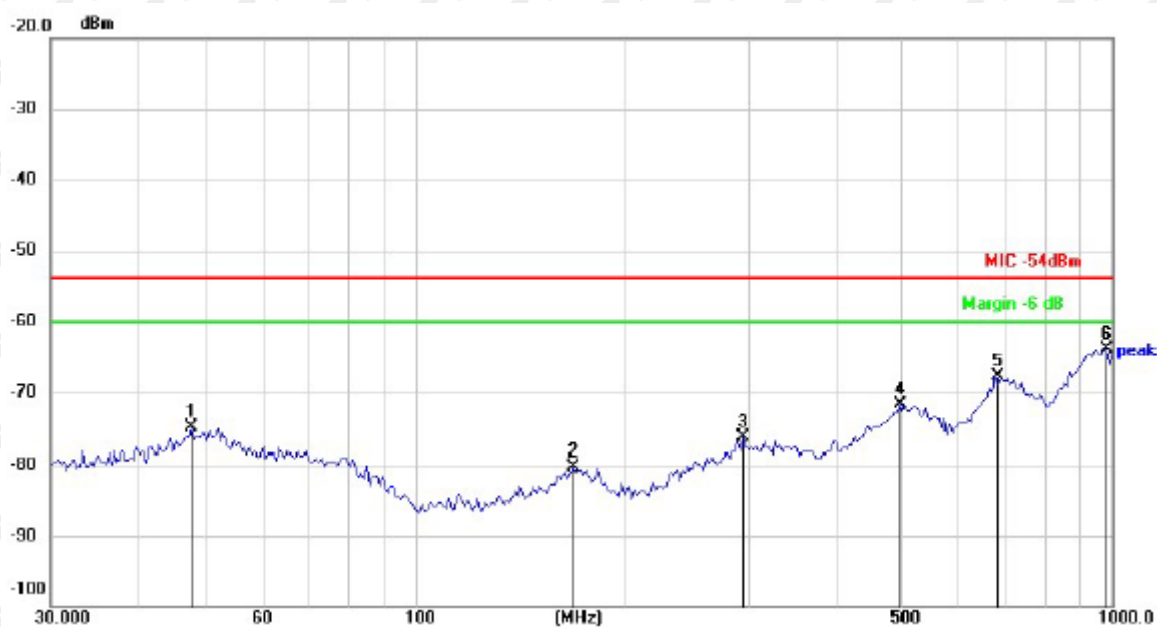

No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dB	Over dB	Detector
1		47.7422	-78.82	4.01	-74.81	-54.00	-20.81	peak
2		168.7093	-80.41	0.05	-80.36	-54.00	-26.36	peak
3		295.6648	-78.80	2.45	-76.35	-54.00	-22.35	peak
4		495.9344	-79.49	7.85	-71.64	-54.00	-17.64	peak
5		679.9600	-78.85	11.22	-67.63	-54.00	-13.63	peak
6	*	982.6200	-78.81	14.87	-63.94	-54.00	-9.94	peak


Vertical:

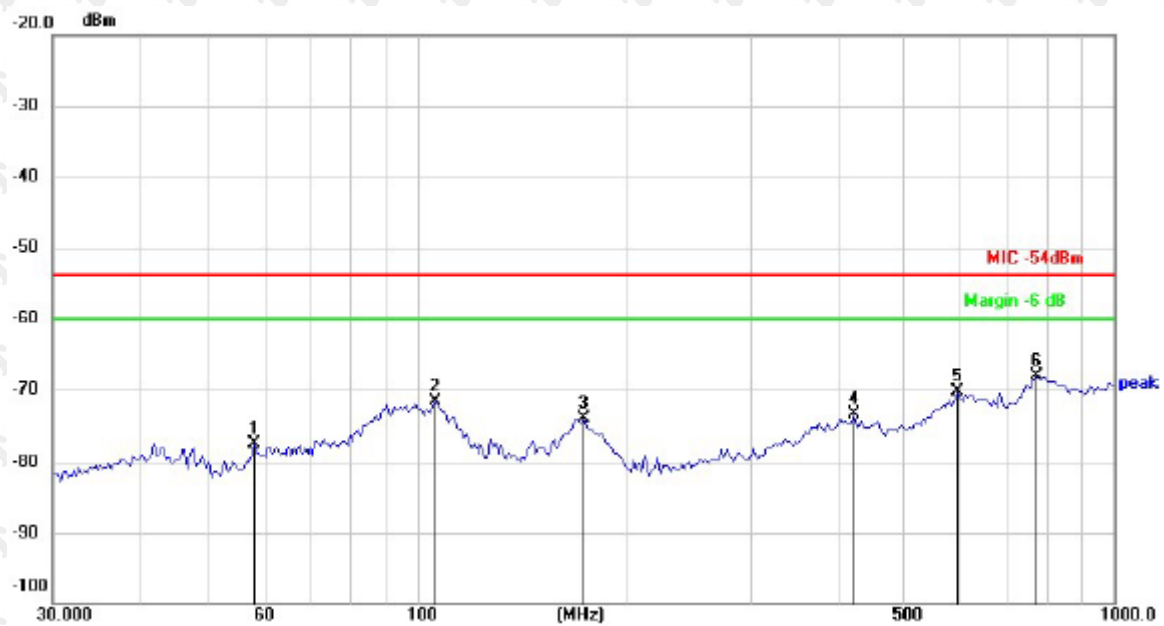

No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dB	Over dB	Detector
1		58.4074	-79.26	1.48	-77.78	-54.00	-23.78	peak
2		106.0126	-78.15	6.50	-71.65	-54.00	-17.65	peak
3		173.2050	-79.94	5.90	-74.04	-54.00	-20.04	peak
4		423.5402	-78.80	5.27	-73.53	-54.00	-19.53	peak
5		596.1772	-79.71	9.36	-70.35	-54.00	-16.35	peak
6	*	775.5169	-79.46	11.31	-68.15	-54.00	-14.15	peak

1000-6000MHz:

Horizontal:

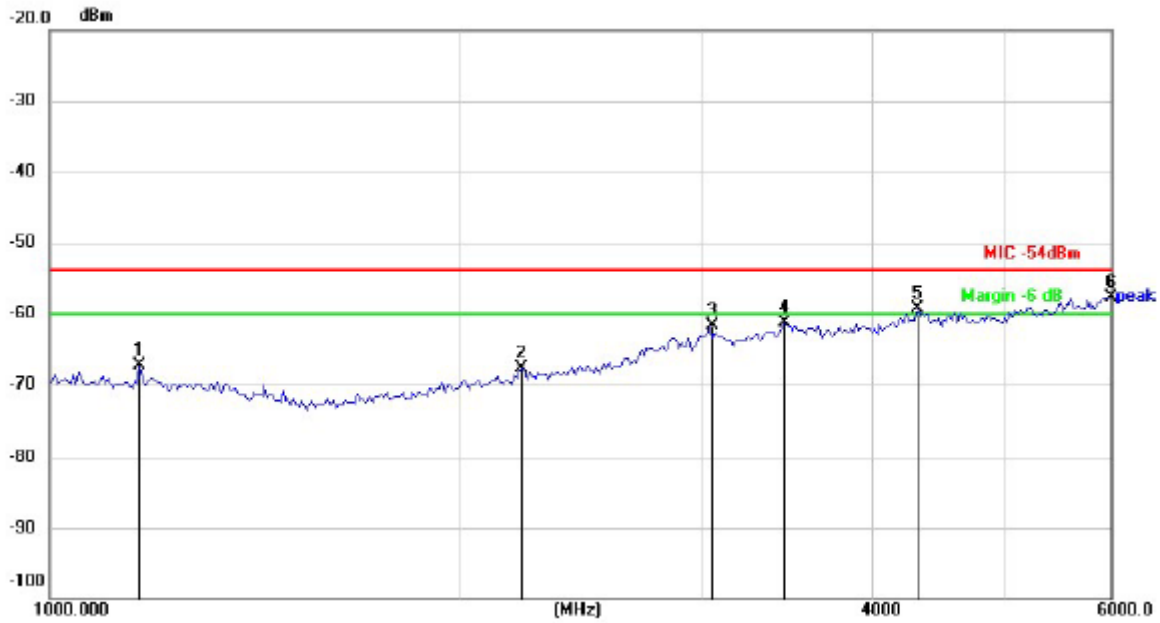

No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dB	Over dB	Detector
1		1164.509	-68.07	0.69	-67.38	-54.00	-13.38	peak
2		2219.613	-73.11	5.48	-67.63	-54.00	-13.63	peak
3		3050.698	-71.63	9.87	-61.76	-54.00	-7.76	peak
4		3458.356	-72.15	10.76	-61.39	-54.00	-7.39	peak
5	!	4326.519	-74.72	15.48	-59.24	-54.00	-5.24	peak
6	*	6000.000	-77.05	19.41	-57.64	-54.00	-3.64	peak

Vertical:



No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dB	Over dB	Detector
1		1064.720	-70.09	3.36	-66.73	-54.00	-12.73	peak
2		1290.882	-70.31	2.19	-68.12	-54.00	-14.12	peak
3		3023.489	-74.10	10.45	-63.65	-54.00	-9.65	peak
4		3396.943	-74.66	11.36	-63.30	-54.00	-9.30	peak
5	!	4882.743	-78.44	18.74	-59.70	-54.00	-5.70	peak
6	*	6000.000	-77.95	20.23	-57.72	-54.00	-3.72	peak

8. Transmission Time

8.1 Standard Applicable

According to Item 8 of Article 2 Paragraph 1. the transmitter shall be complied the following requirements:

Duration of transmission and suspension

(1)For radio equipment which transmission is not periodic: Duration of transmission is 5 seconds or less.

However, 90 seconds or less for radio equipment which transmission is manually performed

(2)For radio equipment which transmission is periodic: Duration of transmission at a time: 1 seconds or less.

Duration of transmission suspension: 30 times or more of transmission duration and 10 seconds or more.

However, when radion equipment is used for safety traffic of vehicles and any compelling.

8.2 Test Procedure

(1) A spectrumIn case of conducted measurements, the radio device shall be connected to the measuring equipment via a suitable attenuator.

(2) The measurement equipment shall be set for peak hold mode of operation.


(3) the transmitter shall be operated at the receiving mode.

(4) The resolution bandwidth shall be set to 100kHz from 10MHz to 1GHz, the resolution bandwidth shall be set to 1MHz above 1GHz, and the sweep time shall be set to auto mode, to ensure all major modulation products are captured.

(5) When the searched result is less than the specified limit, the maximum one shall be recorded, when the result is more than the specified limit, all measured values shall be recorded.

(6) This measurement shall be repeated with the transmitter in standby mode where applicable.

8.3 TEST SETUP LAYOUT

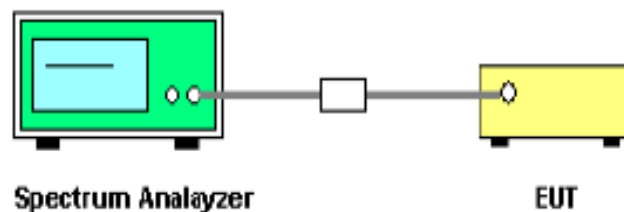

8.4 Environmental Conditions

Temperature:	23℃
Relative Humidity:	54%
ATM Pressure:	101kPa


8.5 TEST RESULT

Test carry out on the remote

Test Voltage (V)	Transmission Type	Test Frequency (MHz)	Transmission Time Seconds (s)	Limits (s)	Result
Normal Voltage	Manually	315	0.595	5	Pass

Normal Voltage

Transmission Time

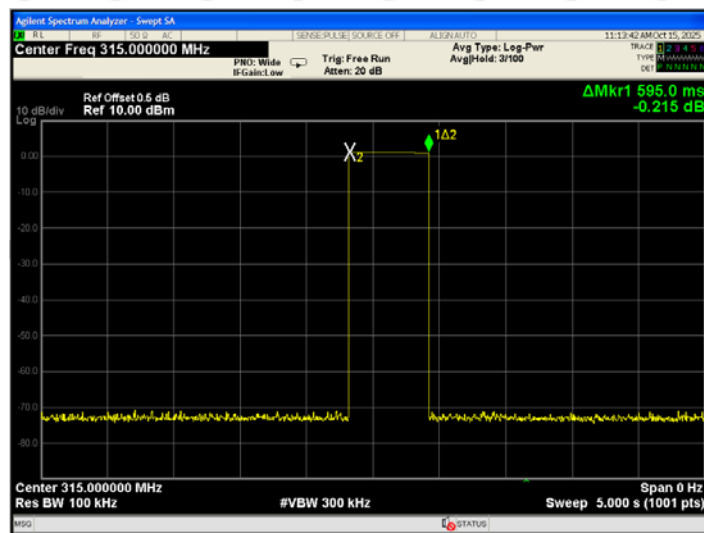

9. Assigned frequency or designated frequency

9.1 Standard Applicable

According to Item 8 of Article 2 Paragraph 1.


Assigned frequency: 315MHz

(Designated frequency band: 312-315.25MHz)

9.2 Test Procedure

- (1) A spectrumIn case of conducted measurements, the radio device shall be connected to the measuring equipment via a suitable attenuator.
- (2) The measurement equipment shall be set for peak hold mode of operation.
- (3) Read the frequency and record it

9.3 TEST SETUP LAYOUT

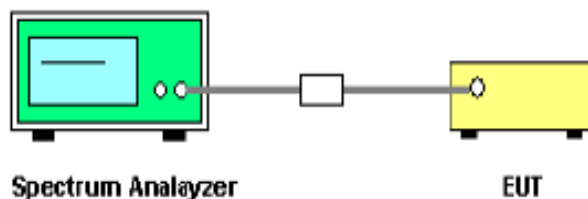


9.4 Environmental Conditions

Temperature:	23℃
Relative Humidity:	54%
ATM Pressure:	101kPa

9.5 TEST RESULT

Test Voltage (V)	Declare Frequency (MHz)	Test Frequency (MHz)	Limit (MHz)
Normal Voltage	315	315.001	312-315.25

Normal Voltage

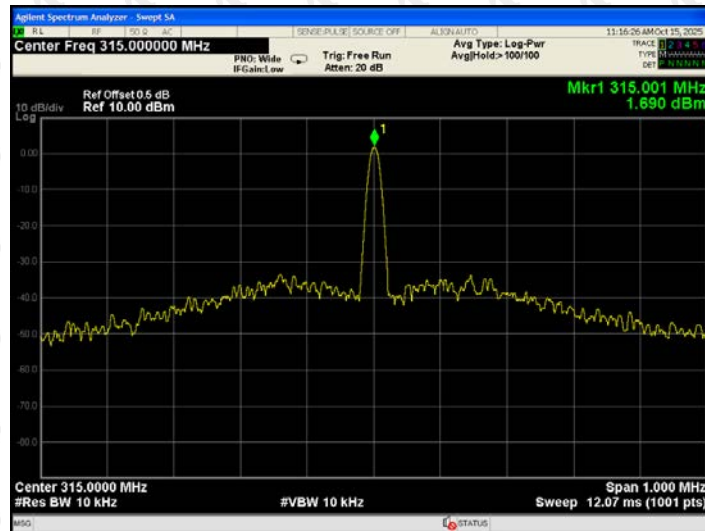

10 Radio Interference Prevention Capability Measurement

10.1 Limit

Item	Limits
Identification code	≥ 48 bits


10.2 Measuring ID code software

Item	Limits
MAC IP List	MAC Scan

10.3 Test procedure

1. In the case that the EUT has the function of automatically transmitting the identification code:
 - a. Transmit the predetermined identification codes form EUT.
 - b. Check the transmitted identification codes with the demodulator.
2. In the case of receiving the identification ocde:
 - a. Transmit the predetermined identification codes form the counterpart.
 - b. Check if communication is normal.
 - c. Transmit the signals other than predetermined ID codes for mthe counterpart.
 - d. check if the EUT stops the transmission, or if it displays that idnetification codes are different from the predetermined ones.

10.4 Test setup layout

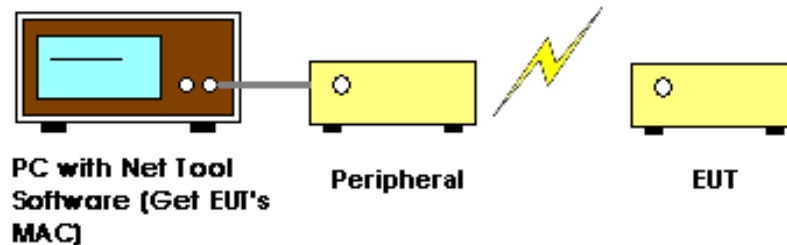

EST DEVIATION

There is no deviation with the original standard.

10.5 EUT OPERATION DURING TEST

The EUT was programmed to be in continuously transmitting mode.

10.6 TEST RESULT

Temperature:	23°C	Relative Humidity:	54%
Pressure:	101kPa		
Test Result:	CONFORM		

MAC: 9CA525BA87F7

11. EUT TEST PHOTO

Radiated Emission


Below 1G



Above 1G



RF Conducted

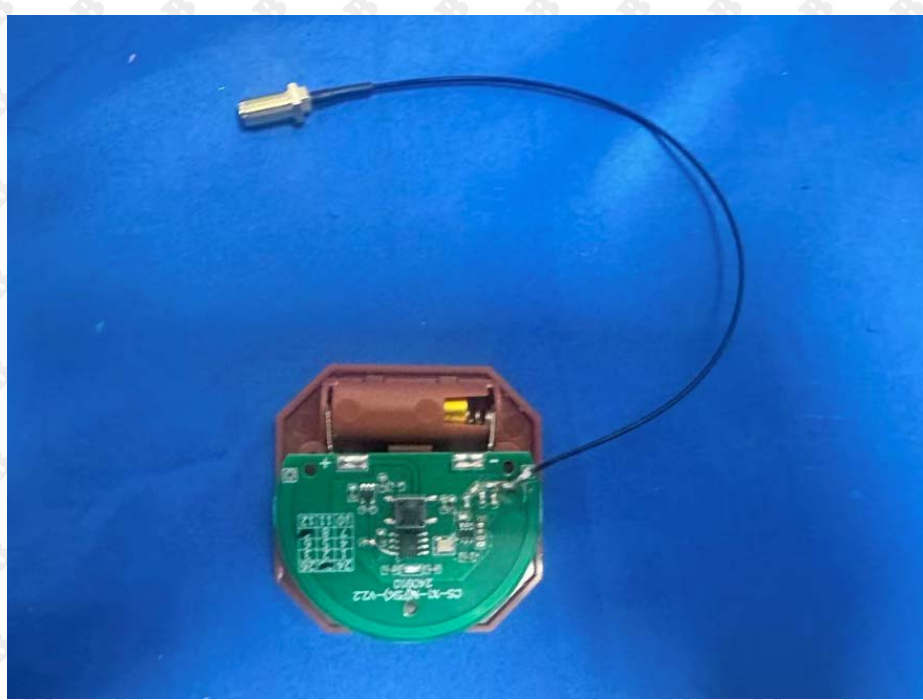

***** END OF REPORT *****