



廠牌:FOXCONN, 型號:T77H747


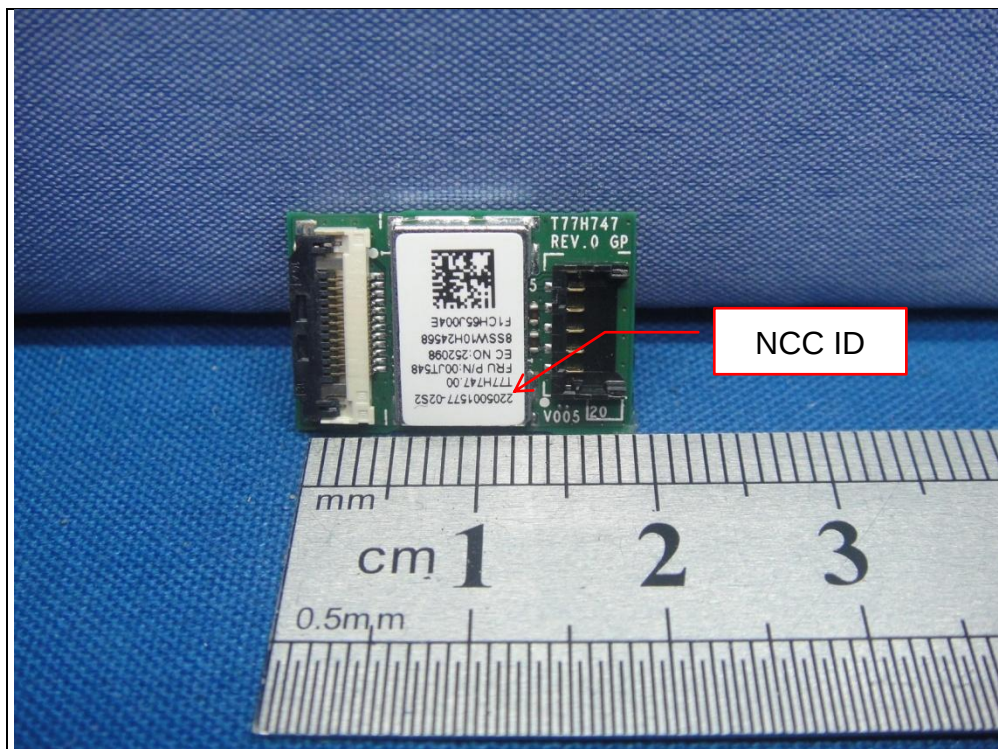


LABEL LOCATION



The label will be permanently affixed at a conspicuous location on the device.

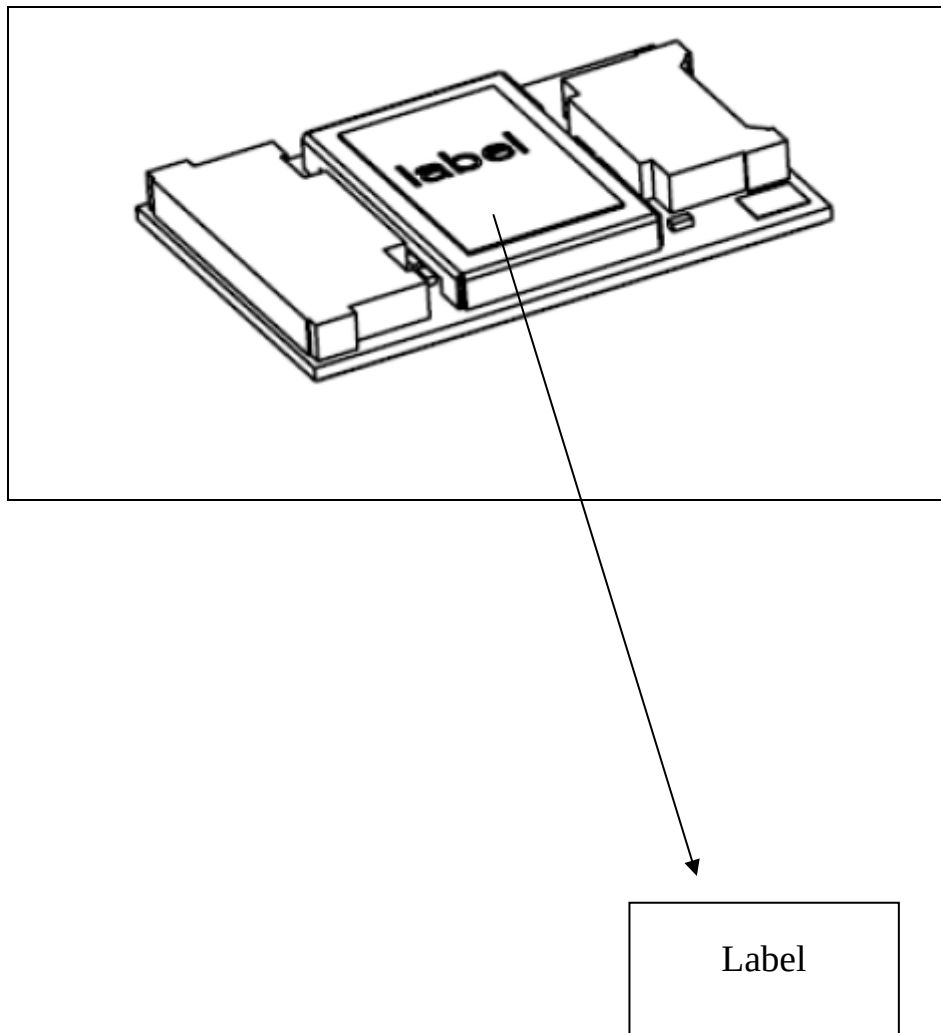

- NOTES:
- 1.Surface Material:50# Mylar
 - 2.Surface Material tolerance:0.050±0.005mm
 - 3.Surface Material color:white
 - 4.printing color is as color defined in artwork
 - 5.Adhesive:Acrylic
 - 6.Adhesive thickness:0.024+/-0.003mm
 - 7.Adhesion to steel(180°磨钢粘着力):1.6±0.3 kg/25mm
 - 8.Initial Tack (初期力) :2# #/bol1
 - 9.Release Power(90°剥离力):5-25 g/25mm
 - 10.Holding Power(持粘力测试法):8# hr/kg/20mm²
 - 11.Package Style:Reel or sheet
 - 12.This part must comply with ROHs and HF.

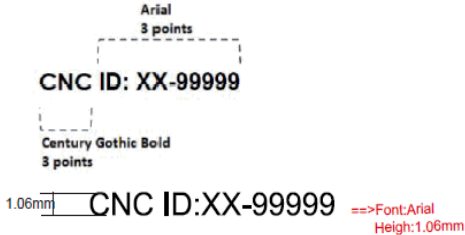

REV.	MARK	ECR/ECN NO.	DATE	UPDATE DESCRIPTION	SIGNATURE
0	N/A	N/A	2016/07/06	First Release	hong jun

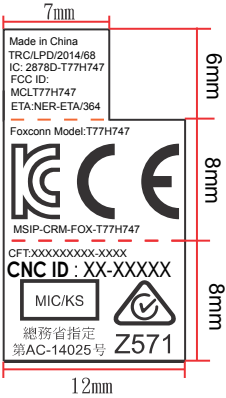

Scale 2:1

Scale 1:1

MATERIAL (SPEC.)										SCALE	FOXCONN		
50# mylar(Matte)											HON HAI PRECISION IND. CO., LTD.		
FINISH										SHEET	CNSBG		
1/1											PART NAME		
Select										UNIT	PTT label		
Dim.	Tol.	A	B	C	EPS	EPE	BAG	CTN	Label	MM	MODEL		
0~6		0.05	0.05	0.10					0.20		PART NO.		
6~30		0.10	0.15	0.20	0.50	0.50	3.00		0.20		DESIGNED		
30~120		0.15	0.20	0.30	0.50	0.50	5.00	2.00	0.25		hong jun		
120~300		0.20	0.30	0.40	1.00	1.00	10.00	3.00	0.30		APPROVED		
300~450		0.25	0.40	0.50	2.00	2.00	15.00	5.00	0.50				
450~600		0.30	0.50	0.60	3.00	3.00	20.00	5.00	0.80				
DRAFT TOLERANCE										*			
± 0.2°													
CRITICAL DIM. MARK													