

RADIO PERFORMANCE TEST REPORT

Test Report No. : OT-264-RWD-036
Reception No. : 2601000303
Applicant : Bushnell Holdings, LLC.
Address : 9955 Black Mountain Rd., San Diego, CA 92126 USA
Manufacturer : Bushnell Holdings, LLC.
Address : 9955 Black Mountain Rd., San Diego, CA 92126 USA
Type of Equipment : GPS Golf Watch
Model Name : 362650
Multiple Model Name : 362651
Serial Part Number : N/A
Total page of Report : 15 pages (including this page)
Date of Incoming : January 23, 2026
Date of issue : April 14, 2026

SUMMARY

The equipment complies with the standard;

Specified Low Power Radio Equipment Article 2 Paragraph 1 Item (19).

This test report only contains the result of a single test of the sample supplied for the examination.

It is not a generally valid assessment of the features of the respective products of the mass-production.

This test report is not associated with the accreditation granted by the Korean Laboratory Accreditation Scheme (KOLAS).

박영빈



Tested by
Ye-Bhin, Park / Engineer
ONETECH Corp.

Reviewed by
Tae-Ho, Kim / Chief Engineer
ONETECH Corp.

Approved by
Jae-Ho, Lee / Director
ONETECH Corp.

CONTENTS

PAGE

1. APPLICANT AND MANUFACTURER INFORMATION	5
2. GENERAL INFORMATION	5
2.1 TEST STANDARDS AND RESULTS	5
2.2 ADDITIONS, DEVIATIONS, EXCLUSIONS FROM STANDARDS.....	5
2.3 PURPOSE OF THE TEST	5
2.4 TEST FACILITY.....	5
3. EUT (EQUIPMENT UNDER TEST).....	6
3.1 IDENTIFICATION OF THE EUT	6
3.2 PRODUCT DESCRIPTION.....	6
3.3 ALTERNATIVE TYPE(S)/MODEL(S); ALSO COVERED BY THIS TEST REPORT.....	7
4. EUT MODIFICATIONS	7
5. FREQUENCY TOLERANCE	8
5.1 OPERATING ENVIRONMENT	8
5.2 TEST SETUP	8
5.3 MEASUREMENT UNCERTAINTY	8
5.4 TEST METHOD	8
5.5 TEST DATE	8
5.6 LIMIT	8
5.7 TEST RESULTS.....	8
6. OCCUPIED BANDWIDTH.....	9
6.1 OPERATING ENVIRONMENT	9
6.2 TEST SETUP	9
6.3 MEASUREMENT UNCERTAINTY	9
6.4 TEST METHOD	9
6.5 TEST DATE	9
6.6 LIMIT	9
6.7 TEST RESULTS.....	9
7. ANTENNA POWER & ANTENNA POWER TOLERANCE	10
7.1 OPERATING ENVIRONMENT	10
7.2 TEST SETUP	10
7.3 MEASUREMENT UNCERTAINTY	10
7.4 TEST METHOD	10
7.5 TEST DATE	10
7.6 LIMIT	10
7.7 TEST RESULTS.....	10
8. TRANSMITTER SPURIOUS EMISSIONS	11
8.1 OPERATING ENVIRONMENT	11
8.2 TEST SETUP	11

8.3 MEASUREMENT UNCERTAINTY	11
8.4 TEST METHOD	11
8.5 TEST DATE	11
8.6 LIMIT	11
8.7 TEST RESULTS.....	11
9. COLLATERAL EMISSION.....	12
9.1 OPERATING ENVIRONMENT	12
9.2 TEST SETUP	12
9.3 MEASUREMENT UNCERTAINTY	12
9.4 TEST METHOD	12
9.5 TEST DATE	12
9.6 LIMIT	12
9.7 TEST RESULTS.....	12
10. INTERFERENCE PREVENTION FUNCTION.....	13
10.1 OPERATING ENVIRONMENT	13
10.2 TEST DATE	13
10.3 LIMIT	13
10.4 TEST RESULTS.....	13
11. LIST OF TEST EQUIPMENT	14
12. TEST SET-UP PHOTO.....	15

Revision History

Rev. No.	Issue Report No.	Issued Date	Revisions	Section Affected
0	OT-264-RWD-036	April 14, 2026	Initial Release	All

1. APPLICANT AND MANUFACTURER INFORMATION

- . Applicant : Bushnell Holdings, LLC.
-. Address : 9955 Black Mountain Rd., San Diego, CA 92126 USA
-. Manufacturer : Bushnell Holdings, LLC.
-. Address : 9955 Black Mountain Rd., San Diego, CA 92126 USA
-. Factory : MCNEX VINA Co., LTD
-. Address : Lot CN1, Phuc Son Industrial Park, Nam Hoa Lu Ward, Ninh Binh Province, Vietnam

2. GENERAL INFORMATION

2.1 Test standards and results

Requirement	Result
Frequency Tolerance	Pass
Occupied Bandwidth	Pass
Antenna Power & Antenna Power Tolerance	Pass
Transmitter Spurious Emissions	Pass
Collateral Emission	Pass
Interference prevention function	Pass

2.2 Additions, deviations, exclusions from standards

No additions, deviations or exclusions have been made from standard.

2.3 Purpose of the test

To determine whether the equipment under test fulfills the RF requirements of the standards stated in section 2.1.

2.4 Test Facility

The Onetech Corp. has been designated to perform equipment testing in compliance with ISO/IEC 17025.

The Electromagnetic compatibility measurement facilities are located at 43-14, Jinsaegol-gil, Chowol-eup, Gwangju-si, Gyeonggi-do, 12735, Korea.

-. Site Filing:

VCCI (Voluntary Control Council for Interference) – Registration No. R-20122/ C-14617/ G-10666/ T-11842

ISED (Innovation, Science and Economic Development Canada) – Registration No. Site# 3736A-3

KOLAS (Korea Laboratory Accreditation Scheme) - Accreditation NO. KT085

FCC (Federal Communications Commission) - Accreditation No. KR0013

RRA (Radio Research Agency) – Designation No. KR0013

3. EUT (Equipment Under Test)

3.1 Identification of the EUT

- Equipment : GPS Golf Watch
- Model Name : 362650
- Brand Name : Bushnell Holdings, LLC.
- Serial number : N/A
- Manufacturer : Bushnell Holdings, LLC.

3.2 Product Description

The Bushnell Holdings, LLC., Model 362650 (referred to as the EUT in this report) is a GPS Golf Watch. The product specification described herein was obtained from product data sheet or user's manual.

Device Type	GPS Golf Watch		
Temperature Range	0 °C ~ 35 °C		
OPERATING FREQUENCY	Bluetooth LE	2 402 MHz ~ 2 480 MHz	
	Bluetooth	2 402 MHz ~ 2 480 MHz	
RF OUTPUT POWER	Bluetooth LE	1 Mbps	10.00 mW/MHz
		2 Mbps	10.00 mW/MHz
	Bluetooth	1 Mbps	0.20 mW/MHz (Non-AFH) 0.50 mW/MHz (AFH)
		2 Mbps	0.20 mW/MHz (Non-AFH) 0.50 mW/MHz (AFH)
		3 Mbps	0.20 mW/MHz (Non-AFH) 0.50 mW/MHz (AFH)
ANTENNA TYPE	LDS Antenna		
ANTENNA GAIN	-4.10 dBi		
List of each Osc. or crystal Freq.(Freq. >= 1 MHz)	32.768 kHz, 24 MHz, 48 MHz		

3.3 Alternative type(s)/model(s); also covered by this test report.

-. The following lists consist of the added model and their differences.

Model Name	Differences	Tested
362650	Basic Model	☒
362651	The model is identical to basic model except for the Color.	☐

Note: 1. Applicant consigns only basic model to test. Therefore this test report just guarantees the units, which have been tested.

2. The Applicant/manufacturer is responsible for the compliance of all variants.

4. EUT MODIFICATIONS

-. None

5. Frequency Tolerance

5.1 Operating environment

Temperature : 26 °C
Relative humidity : 52 % R.H.

5.2 Test Setup

The EUT was operated in continuous transmit mode (modulated). The frequency was measured by the use of a Spectrum Analyzer

5.3 Measurement uncertainty

The uncertainty for Frequency is $\pm 13\,205.68$ Hz.

5.4 Test Method

Ministry of Internal Affairs and Communications Notification Article 88 Appendix 43

5.5 Test Date

January 23, 2026 ~ February 10, 2026

5.6 Limit

Test Case	Limit (ppm)
Frequency Tolerance	± 50.00

5.7 Test Results

Please refer to Appendix A.

6. Occupied Bandwidth

6.1 Operating environment

Temperature : 26 °C
Relative humidity : 52 % R.H.

6.2 Test Setup

The EUT was operated in continuous transmit mode (modulated). For occupied bandwidth measurement the internal occupied bandwidth measurement capability of Spectrum Analyzer was used. The bandwidth for 99 % power was measured.

6.3 Measurement uncertainty

The uncertainty for Occupied Channel Bandwidth is $\pm 5\,929.54$ Hz.

6.4 Test Method

Ministry of Internal Affairs and Communications Notification Article 88 Appendix 43

6.5 Test Date

January 23, 2026 ~ February 10, 2026

6.6 Limit

Test Case	Limit (MHz)	
Occupied Bandwidth	DSSS, OFDM, etc.	≤ 26
	OFDM	≤ 40

6.7 Test Results

Please refer to Appendix A.

7. Antenna Power & Antenna Power Tolerance

7.1 Operating environment

Temperature : 26 °C
Relative humidity : 52 % R.H.

7.2 Test Setup

The EUT was operated in continuous transmit mode (modulated). The power meter was connected to IF output.
The external attenuation was corrected by the power meter's correction capability.

7.3 Measurement uncertainty

The uncertainty for Antenna Power is ± 1.22 dB.

7.4 Test Method

Ministry of Internal Affairs and Communications Notification Article 88 Appendix 43

7.5 Test Date

January 23, 2026 ~ February 10, 2026

7.6 Limit

Test Case	Limit		
Antenna Power & Antenna Power Tolerance & E.I.R.P	Antenna Power	OBW $\leq$ 26 MHz	$\leq$ 10 mW/MHz
		26 MHz $<$ OBW $\leq$ 40 MHz	$\leq$ 5 mW/MHz
	Antenna Power Tolerance	+20 %	
	E.I.R.P	OBW $\leq$ 26 MHz	$\leq$ 12.14 dBm/MHz
		26 MHz $<$ OBW $\leq$ 40 MHz	$\leq$ 9.14 dBm/MHz

7.7 Test Results

Please refer to Appendix A.

8. Transmitter Spurious Emissions

8.1 Operating environment

Temperature : 26 °C
Relative humidity : 52 % R.H.

8.2 Test Setup

Measurement frequency range acc. to Ordinance Regulation Radio Equipment (2008-04) from 30 MHz to 5 times the carrier frequency; measurement performed in the range 30 MHz to 12.5 GHz.

The EUT was operated in continuous transmit mode (modulated).

Cable losses and external attenuators were regarded by the use of a transducer factor.

8.3 Measurement uncertainty

Conducted spurious emissions of transmitter, 30 MHz ~ 40 GHz : ± 1.40 dB

8.4 Test Method

Ministry of Internal Affairs and Communications Notification Article 88 Appendix 43

8.5 Test Date

January 23, 2026 ~ February 10, 2026

8.6 Limit

Test Case	Limit (uW/MHz)	
Transmitter Spurious Emissions	30 MHz ~ 2 387 MHz	≤ 2.5
	2 387 MHz ~ 2 400 MHz	≤ 25.0
	2 483.5 MHz ~ 2 496.5 MHz	≤ 25.0
	2 496.5 MHz ~ 12.5 GHz	≤ 2.5

8.7 Test Results

Please refer to Appendix A.

9. Collateral Emission

9.1 Operating environment

Temperature : 26 °C
Relative humidity : 52 % R.H.

9.2 Test Setup

Measurement frequency range acc. to Ordinance Regulation Radio Equipment (2008-04) from 30 MHz to 5 times the carrier frequency; measurement performed in the range 30 MHz to 12.5 GHz.

The EUT was operated in continuous receive mode (modulated).

Cable losses and external attenuators were regarded by the use of a transducer factor.

9.3 Measurement uncertainty

Conducted spurious emissions of transmitter, 30 MHz ~ 40 GHz : ± 1.40 dB

9.4 Test Method

Ministry of Internal Affairs and Communications Notification Article 88 Appendix 43

9.5 Test Date

January 23, 2026 ~ February 10, 2026

9.6 Limit

Test Case	Limit (nW)	
	30 MHz ~ 1 GHz	≤ 4.0
Collateral Emission	1 GHz ~ 12.5 GHz	≤ 20.0

9.7 Test Results

Please refer to Appendix A.

10. Interference prevention function

10.1 Operating environment

Temperature : 26 °C
Relative humidity : 52 % R.H.

10.2 Test Date

January 23, 2026 ~ February 10, 2026

10.3 Limit

Radio equipment used mainly on the same premises and automatically transmits or receives identification code

10.4 Test Results

Please refer to Appendix A.

11. LIST OF TEST EQUIPMENT


Model Number	Manufacturer	Description	Serial Number	Last Cal. (Interval)	Calibration body name	Remarks
FSV3044	Rohde & Schwarz	Spectrum Analyzer	101758	Jul. 02, 2025 (1Y)	KC LAB	24-2 paragraph 「ハ」
FSV30	Rohde & Schwarz	Spectrum Analyzer	101199	Jan. 13, 2026 (1Y)	KC LAB	
MA24408A	Anritsu	Microwave Peak Power Sensor	12199	Jan. 14, 2026 (1Y)	KC LAB	
SMB100A	Rohde & Schwarz	Signal Generator	177648	Jan. 14, 2026 (1Y)	KC LAB	
152610	KRYTAR	Directional Coupler	214012	Jan. 15, 2026 (1Y)	KC LAB	
TC-3000C	TESCOM	BLUETOOTH TESTER	3000C000634	Jan. 14, 2026 (1Y)	KC LAB	
CMW270	Rohde & Schwarz	WIRELESS CONNECTIVITY TESTER	101325	Jan. 13, 2026 (1Y)	KC LAB	
ZUP36-6	TDK-Lambda	DC Power Supply	6MJ-850Z16-0014	Jan. 12, 2026 (1Y)	KC LAB	

All test equipment used is calibrated on a regular basis.

Article 24-2, Paragraph 4, Item 2 of the Radio Law

(c) Calibration conducted in foreign countries, which shall be equivalent to the calibration conducted by the NICT or a designated calibration agency under Article 102-18 paragraph (1)

12. TEST SET-UP PHOTO

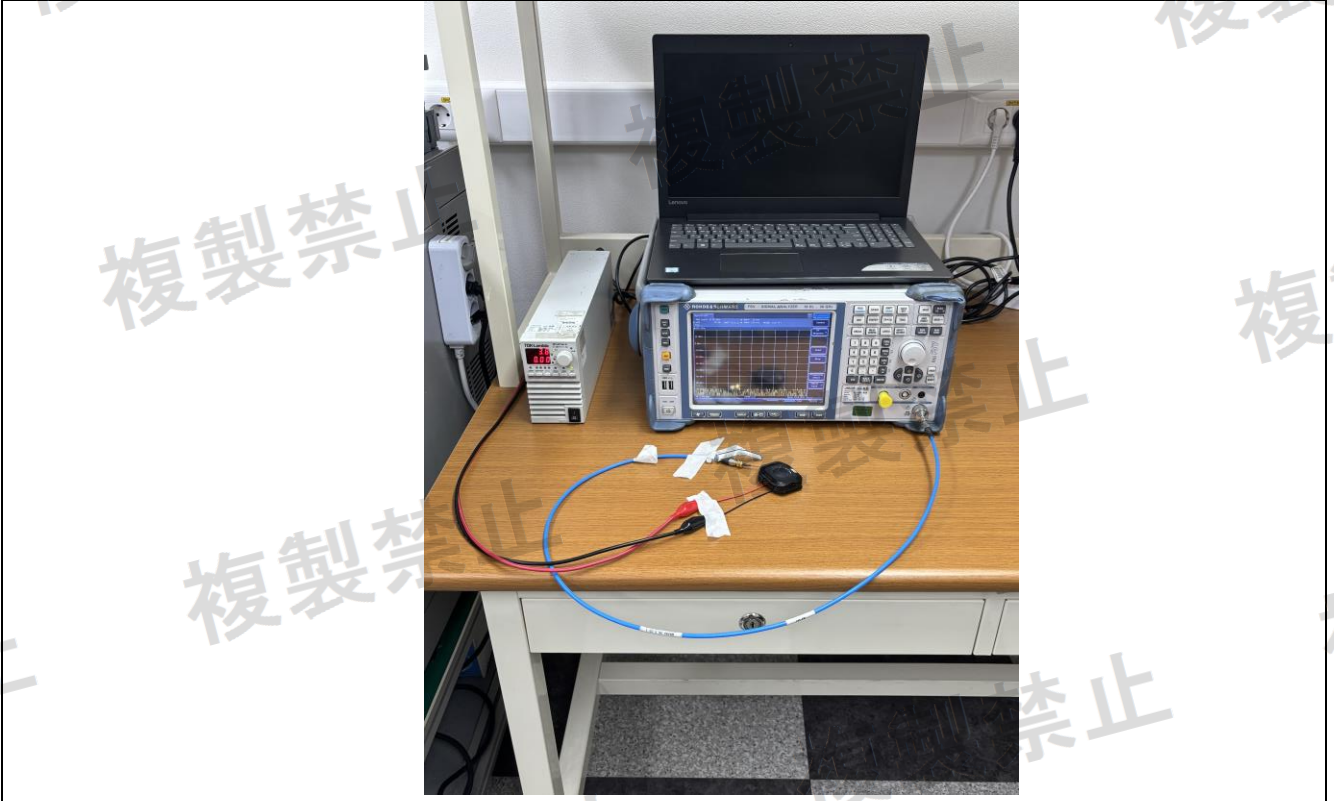

Appendix A : Test Results

Please refer to the following pages for test results.

Test Result and Measuring equipment for certification

2.4GHz Band advanced low-power data communication system (Article 2-1-19)

					Bluetooth LE 1M			Antenna 1 PCB Antenna		
Radio Equipment for test	Model or type name:		Test environment	Temperature : 26 °C	Type of radio, frequency and antenna power		F1D, 2402~2480 MHz, 2MHz Separation: 40 channels		10 mW	
				Humidity : 52 % R.H						
Test Engineer	Ye-bhin, Park		Test site	ONETECH, S/R1		Test date	2026.01.23 ~ 2026.02.10		Test method	Appendix No.43


E q u i p m e n t	Model and type name	Serial number	Manufacturer	Calibrated Date	Calibration Company	Note
	SPECTRUM ANALYZER (FSV3044)	101758	Rohde & Schwarz	2025.07.02	KC LAB	Based on Japanese Radio Law 24-2-4-2-ha
	SPECTRUM ANALYZER (FSV30)	101199	Rohde & Schwarz	2026.01.13	KC LAB	Based on Japanese Radio Law 24-2-4-2-ha
	SIGNAL GENERATOR (SMB100A)	177648	Rohde & Schwarz	2026.01.14	KC LAB	Based on Japanese Radio Law 24-2-4-2-ha
	BLUETOOTH TESTER (TC-3000C)	3000C000634	TESCOM	2026.01.14	KC LAB	Based on Japanese Radio Law 24-2-4-2-ha
	WIRELESS CONNECTIVITY TESTER (CMW270)	101325	Rohde & Schwarz	2026.01.13	KC LAB	Based on Japanese Radio Law 24-2-4-2-ha
	DC POWER SUPPLY (ZUP36-6)	6MJ-850Z16-0014	TDK-Lambda	2026.01.12	KC LAB	Based on Japanese Radio Law 24-2-4-2-ha
	DIRECTIONAL COUPLER (152610)	214012	KRYTAR	2026.01.15	KC LAB	Based on Japanese Radio Law 24-2-4-2-ha
MICROWAVE PEAK POWER SENSOR(MA24408A)	12199	Anritsu	2026.01.14	KC LAB	Based on Japanese Radio Law 24-2-4-2-ha	

Test result	Electric performance			Voltage	V	Limit	DC 4.0 V (normal)			DC 4.4 V (high)			DC 3.7 V (low)			Note	
				Test Frequency	MHz		2402	2440	2480	2402	2440	2480	2402	2440	2480		
	Frequency error(measured frequency)		MHz		2401.992579	2439.993516	2479.991719		2401.994766	2439.993907	2479.992813		2401.993985	2439.99211	2479.993594		
	Frequency error		ppm	50	-3.08950874	-2.65737705	-3.3391129		-2.17901749	-2.49713115	-2.89798387		-2.5041632	-3.23360656	-2.58306452		
	Occupied bandwidth		MHz	26	1.24	1.23	1.24		1.24	1.24	1.24		1.24	1.23	1.24		
	Spreading bandwidth		MHz	NA													
	Spreading Factor		-	NA													
	Spurious (measured frequency) 30 ~ 2387 MHz		-	MHz	2 381.10	1 721.80	930.70		2 385.80	1 024.80	966.00		2 385.80	1 898.40	1 721.80		
			μ W/MHz	2.5	0.0703	0.0238	0.0230		0.0664	0.0315	0.0218		0.0493	0.0206	0.0297		
	(measured frequency) 2387 ~ 2400 MHz		-	MHz	2 399.99	2 391.01	2 392.36		2 399.98	2 391.93	2 397.33		2 399.99	2 391.55	2 397.37		
			μ W/MHz	25	1.6444	0.0262	0.0249		1.6866	0.0283	0.0211		1.7701	0.0263	0.0213		
	(measured frequency) 2483.5 ~ 2496.5 MHz		-	MHz	2 496.05	2 488.25	2 492.03		2 487.46	2 488.12	2 495.60		2 491.87	2 487.95	2 494.69		
			μ W/MHz	25	0.0243	0.0257	0.0891		0.0237	0.0270	0.0931		0.0252	0.0249	0.0865		
	(measured frequency) 2496.5 ~ 12500 MHz		-	MHz	6 728.50	4 879.50	4 959.50		6 888.50	4 879.50	4 959.50		6 898.50	4 879.50	4 959.50		
			μ W/MHz	2.5	0.0752	0.0836	0.1718		0.1038	0.0836	0.1256		0.0760	0.0935	0.1156		
	Antenna power deviation		mW	10	5.52	5.97	5.78		5.4	5.99	5.68		5.53	5.94	5.79		
			%	-80 20	-44.80 -40.30	-42.20		-46.00 -40.10	-43.20		-44.70 -40.60	-42.10					
	Collateral Emission		(measured frequency) 30 ~ 1000 MHz	-	MHz	239.80	239.80	239.80		239.80	239.80	239.80		239.80	239.80	239.80	
				nW	4	0.0101	0.0098	0.0089		0.0092	0.0096	0.0088		0.0097	0.0088	0.0093	
			(measured frequency) 1000 ~ 12500 MHz	-	MHz	2 407.00	2 476.00	2 442.00		6 899.00	6 819.00	6 957.00		6 865.00	6 888.00	1 982.00	
			nW	20	0.1094	0.1233	0.1330		0.0728	0.0827	0.0761		0.0829	0.0743	0.3807		
	E.I.R.P.		mW/MHz	NA													
	Hopping Frequency staying time		sec	NA													
	Interference Protection (Deveice ID)				yes	Complies	Complies	Complies		Complies	Complies	Complies		Complies	Complies	Complies	
	Carrier Sense				NA												

Antenna Gain: -4.10 dBi
Allowed Maximum E.I.R.P : 5.90 dBm


NA = Not Applicable

Test Band			LE 1M											
Antenna			-											
Test Parameters for Channel Bandwidths														
Test Item	No.	Mode	Channel	Bandwidth	RU Tone	RB index	Verdict							
Duty Cycle	1	LE 1M	2402				Pass							
	2		2440				Pass							
	3		2480				Pass							
Frequency Error	4		2402				Pass							
	5		2440				Pass							
	6		2480				Pass							
OBW	7		2402				Pass							
	8		2440				Pass							
	9		2480				Pass							
Tx Spurious	10		2402								Pass			
	11										Pass			
	12										Pass			
	13										Pass			
	14		2441								-	-	-	Pass
	15										Pass			
	16										Pass			
	17										Pass			
	18		2480								Pass			
	19										Pass			
	20										Pass			
	21										Pass			
Collateral Emission	22		2402								Pass			
	23										Pass			
	24		2441								Pass			
	25										Pass			
	26		2480								Pass			
	27										Pass			

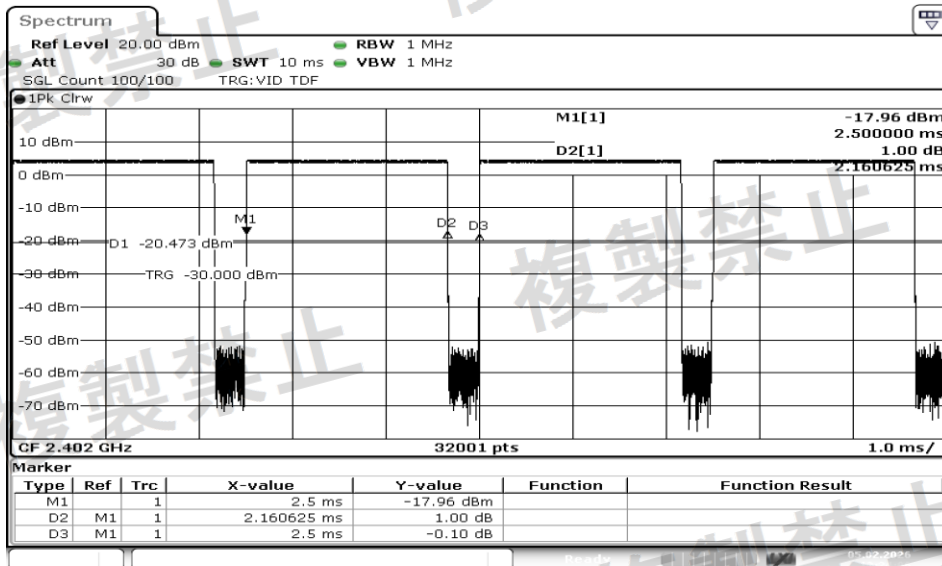


Date: 5.FEB.2026 13:24:06

1	Duty Cycle_상온_LE1M_Normal_F1_2402
---	-----------------------------------

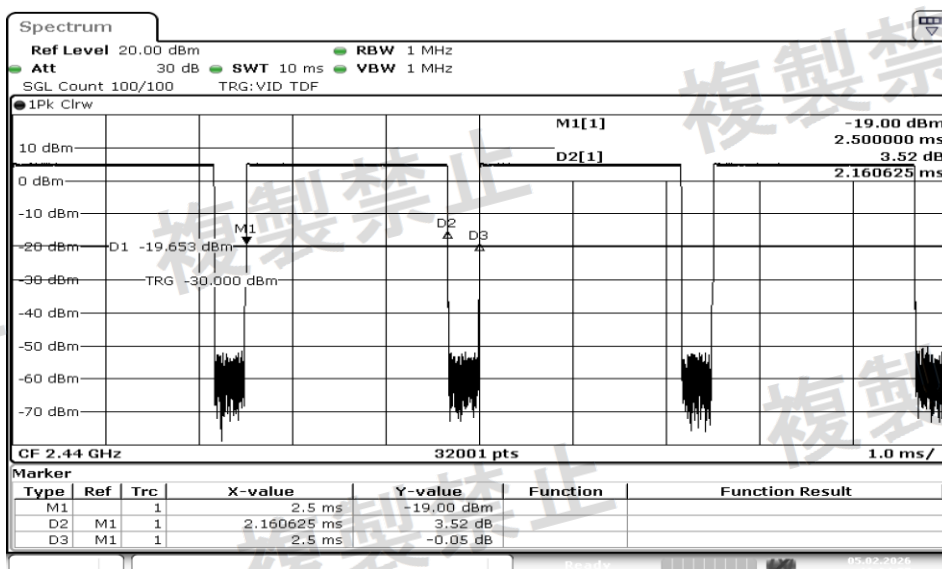


Date: 5.FEB.2026 13:24:56


2	Duty Cycle_상온_LE1M_Normal_F2_2440
---	-----------------------------------

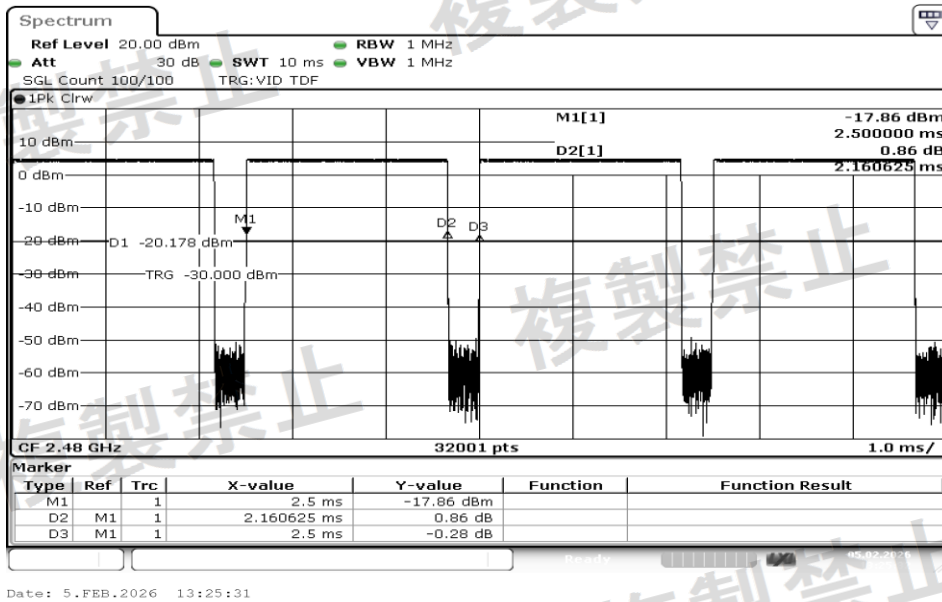


3	Duty Cycle_상온_LE1M_Normal_F3_2480
---	-----------------------------------

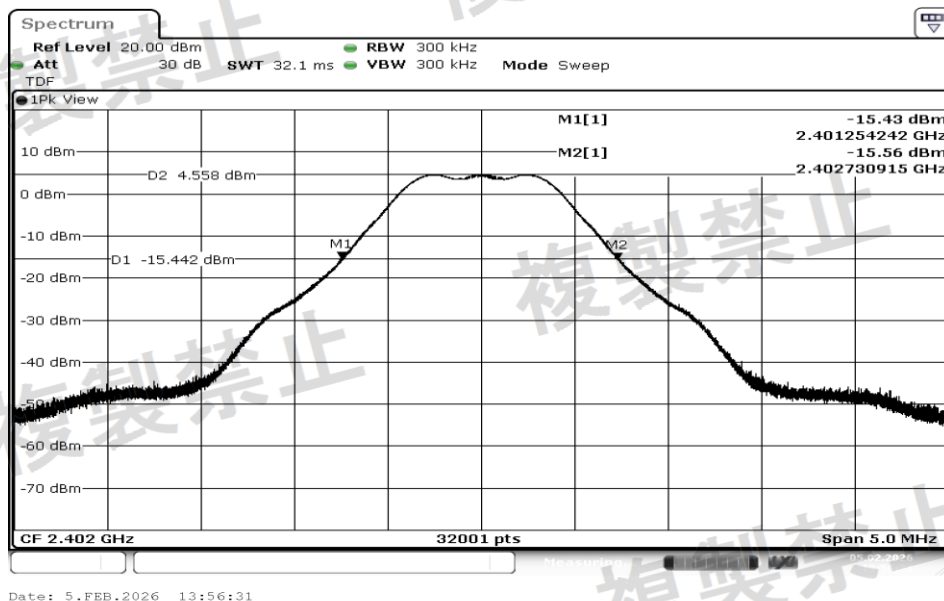


4	Frequency Error_상온_LE1M_Normal_F1_2402
---	--

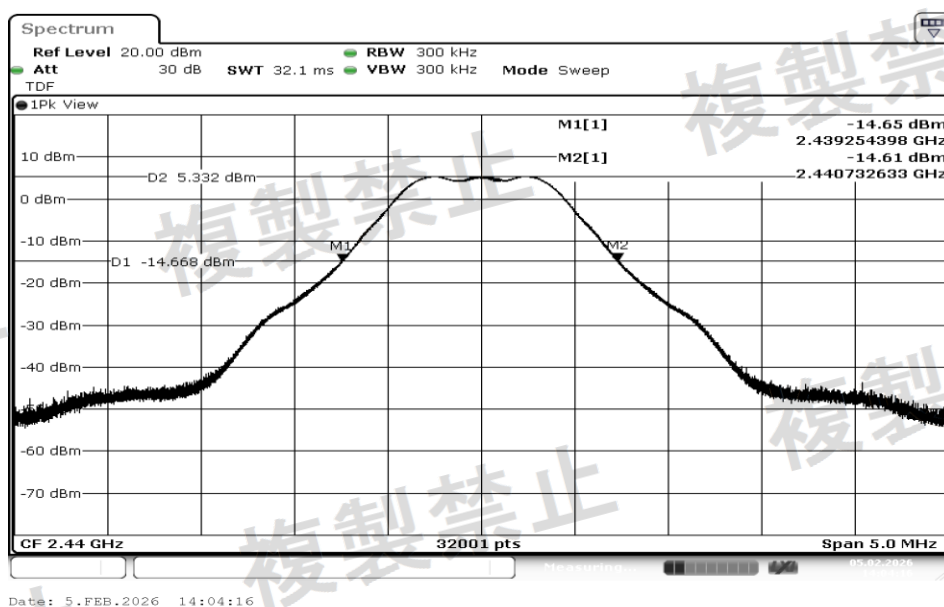


5	Frequency Error_상온_LE1M_Normal_F2_2440
---	--

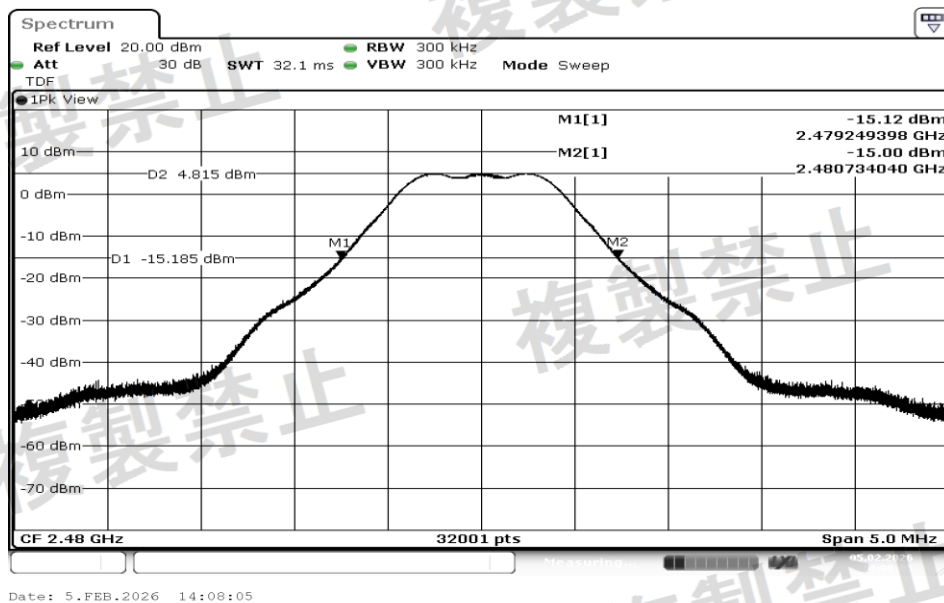


6	Frequency Error_상온_LE1M_Normal_F3_2480
---	--

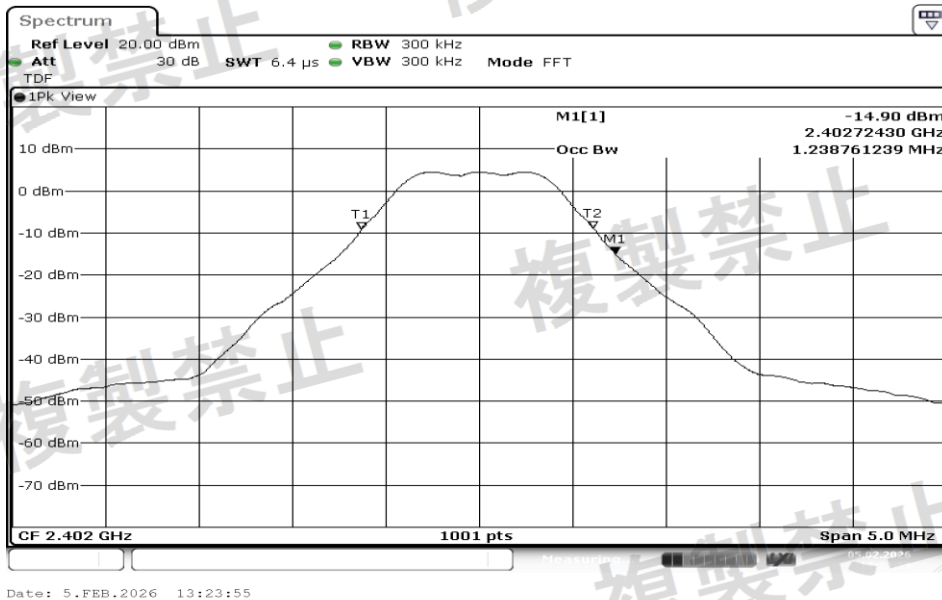


7	OBW_상온_LE1M_Normal_F1_2402
---	----------------------------

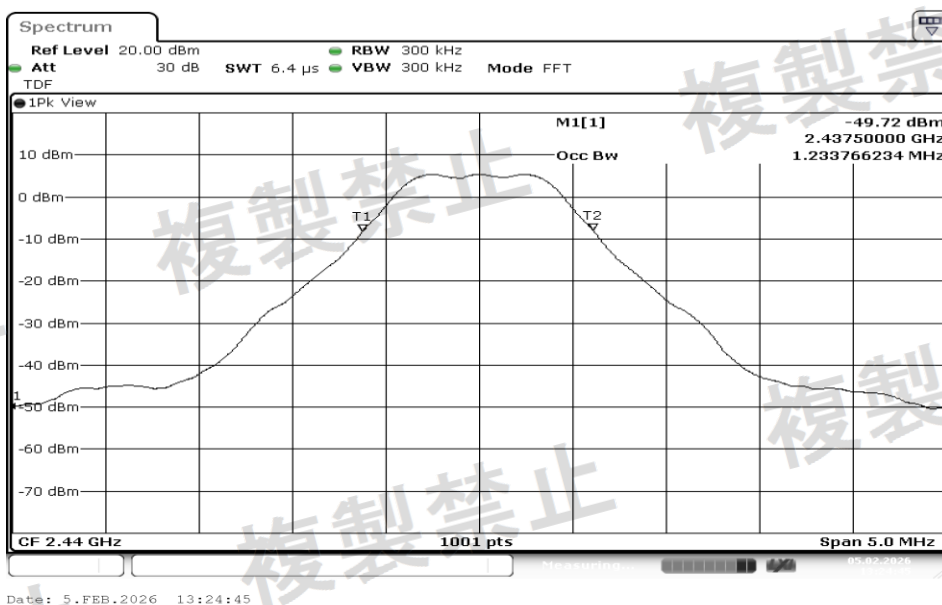


8	OBW_상온_LE1M_Normal_F2_2440
---	----------------------------

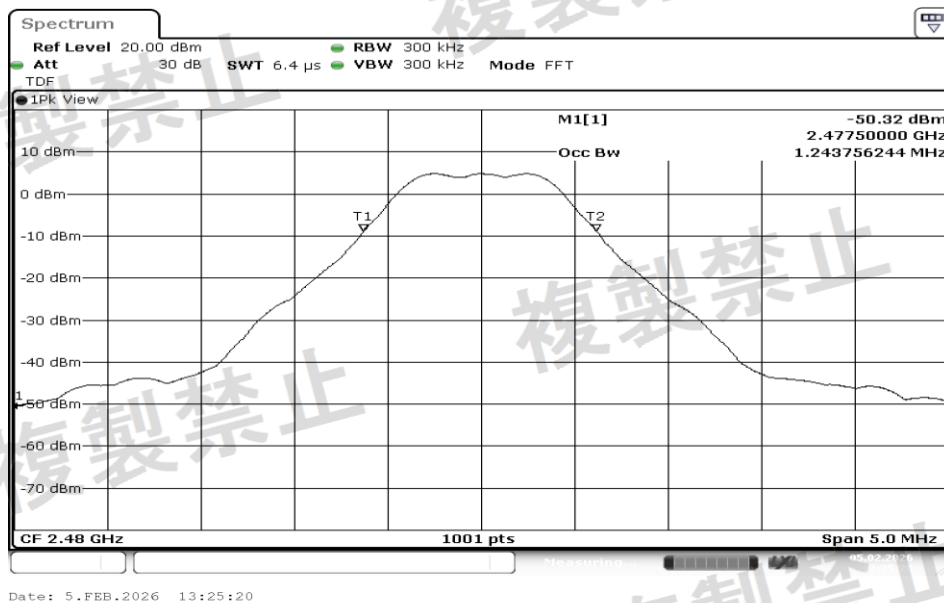


9	OBW_상온_LE1M_Normal_F3_2480
---	----------------------------

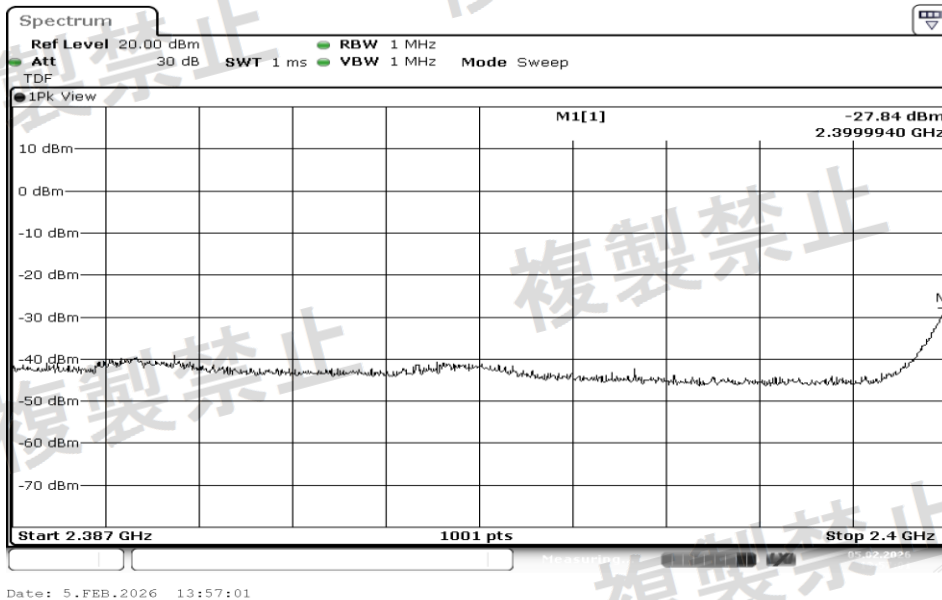


10	Tx Spurious_상온_LE1M_Normal_F1_2402 2387-2400 Full Span
----	--

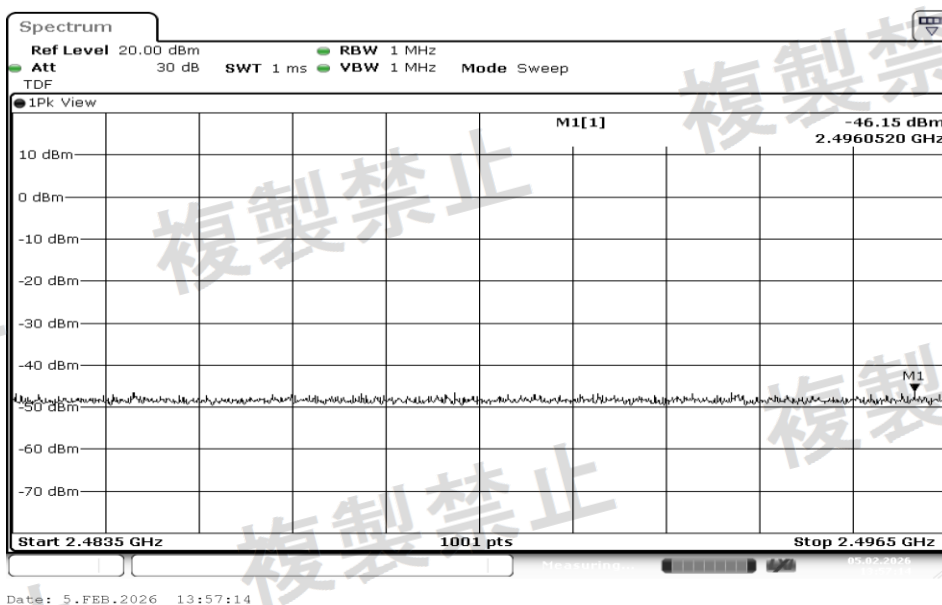


11	Tx Spurious_상온_LE1M_Normal_F1_2402 2483.5-2496.5 Full Span
----	--

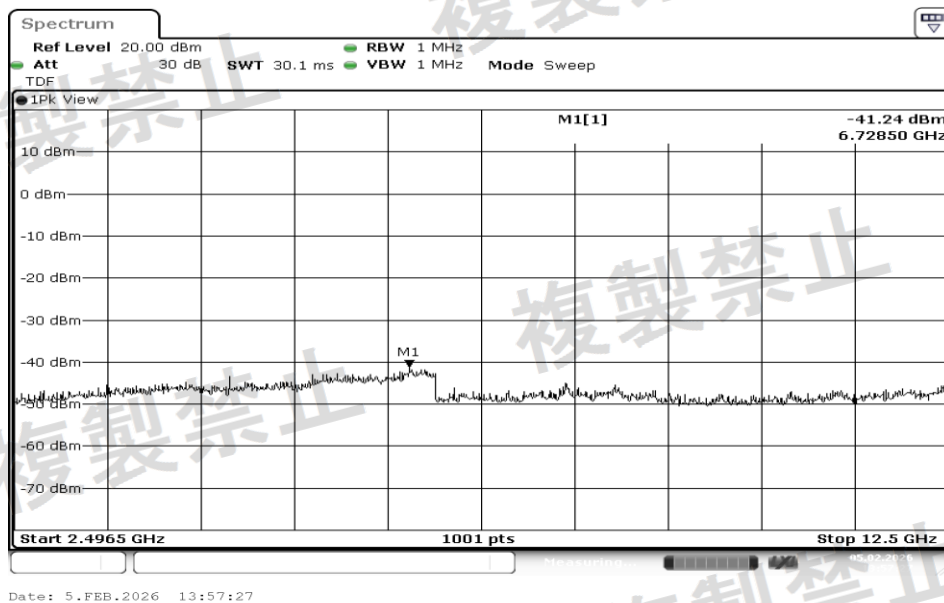


12 Tx Spurious_상온_LE1M_Normal_F1_2402 2496.5-12500 Full Span

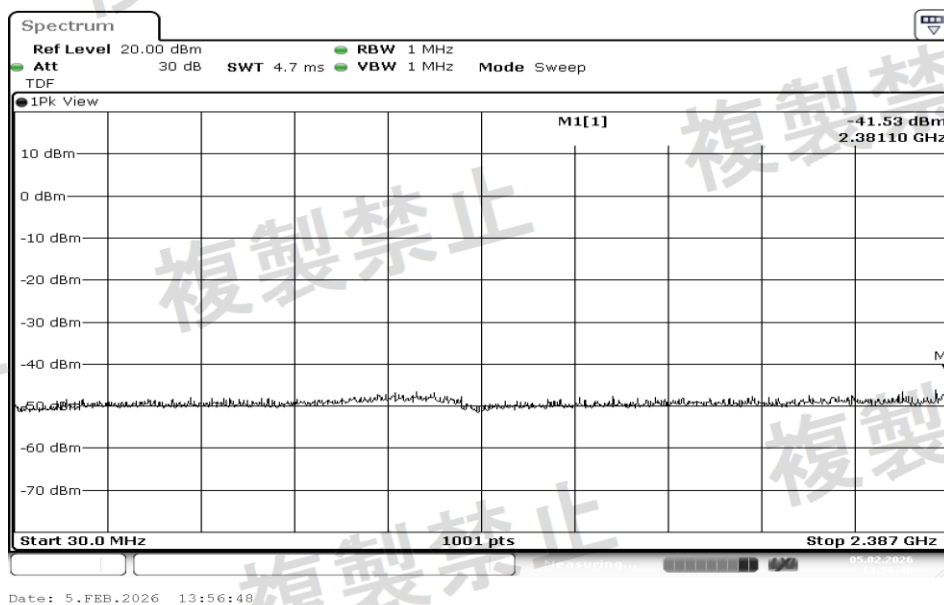


13 Tx Spurious_상온_LE1M_Normal_F1_2402 30-2387 Full Span

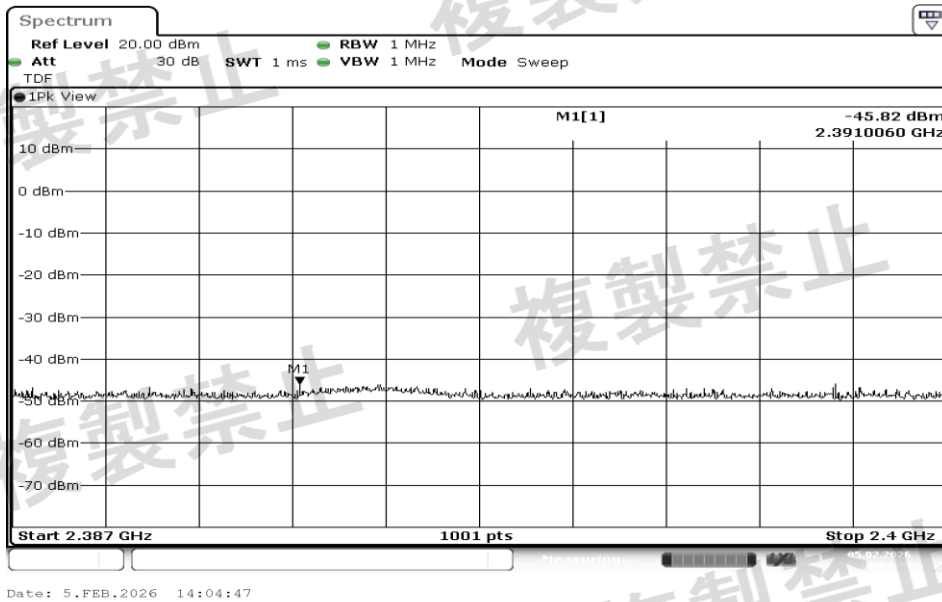


14 Tx Spurious_상온_LE1M_Normal_F2_2440 2387-2400 Full Span

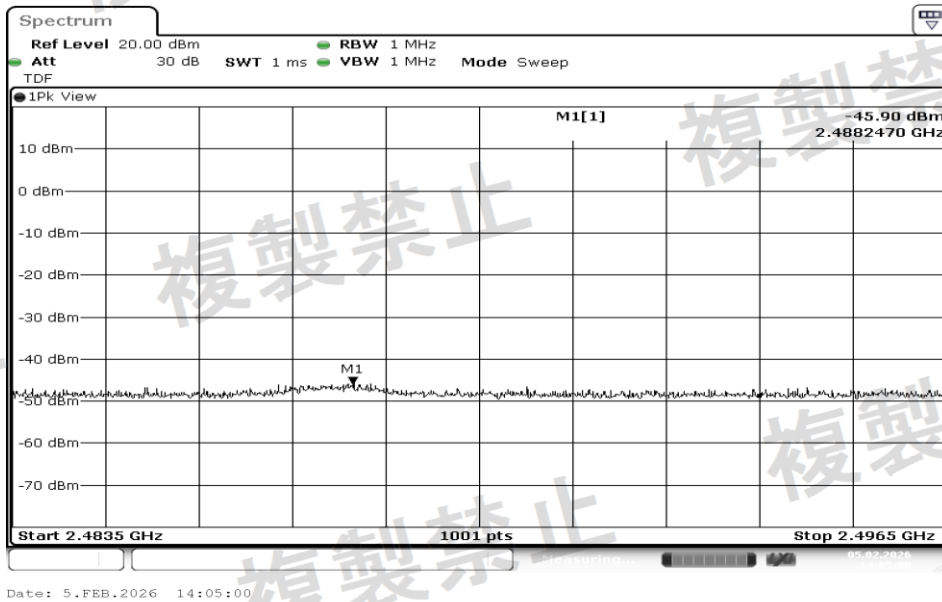


15 Tx Spurious_상온_LE1M_Normal_F2_2440 2483.5-2496.5 Full Span

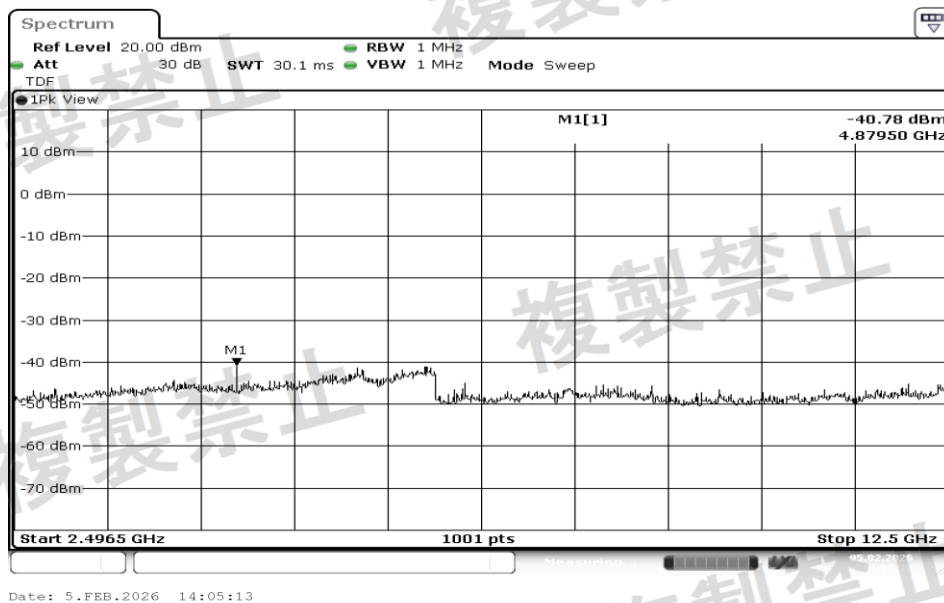


16 Tx Spurious_상온_LE1M_Normal_F2_2440 2496.5-12500 Full Span

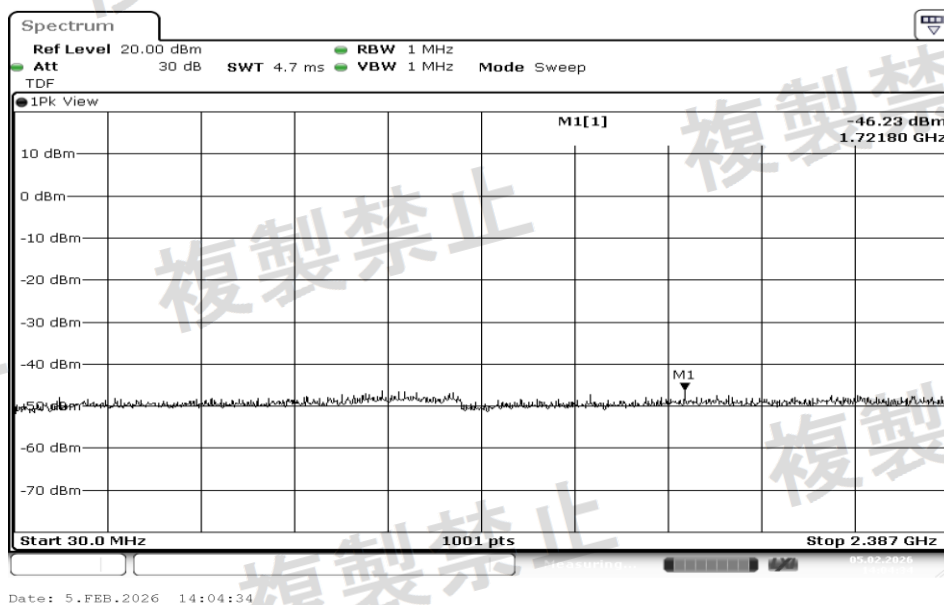


17 Tx Spurious_상온_LE1M_Normal_F2_2440 30-2387 Full Span

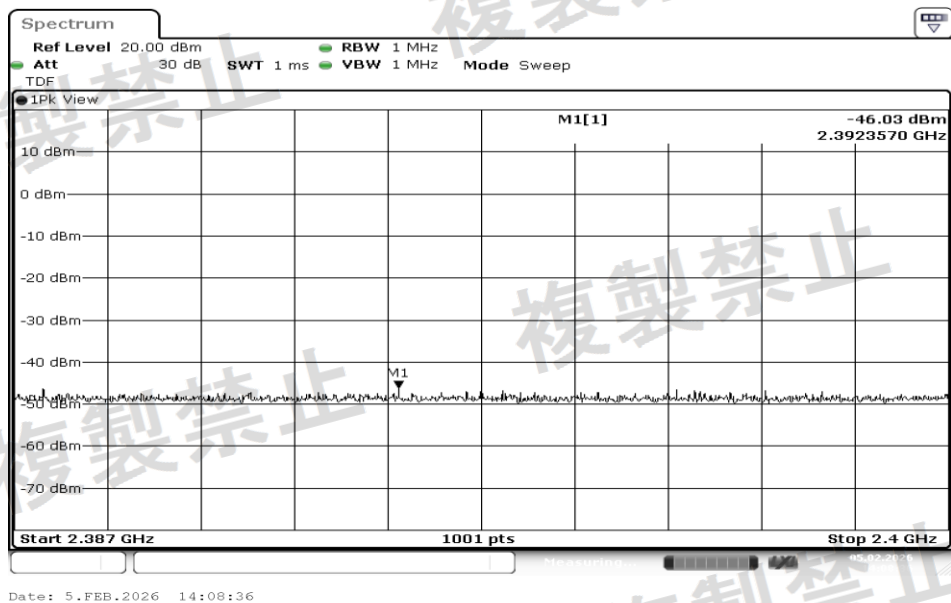


18 Tx Spurious_상온_LE1M_Normal_F3_2480 2387-2400 Full Span

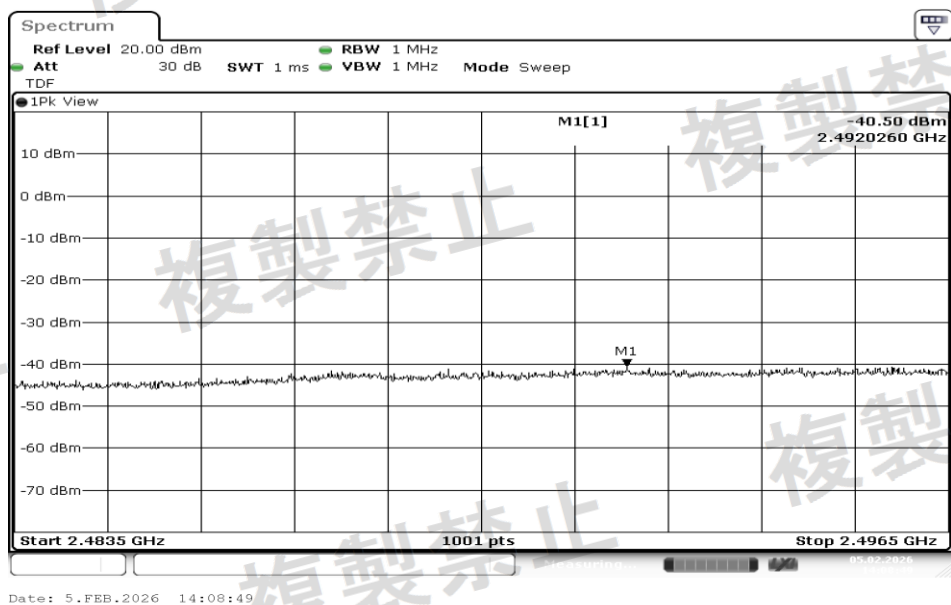


19 Tx Spurious_상온_LE1M_Normal_F3_2480 2483.5-2496.5 Full Span

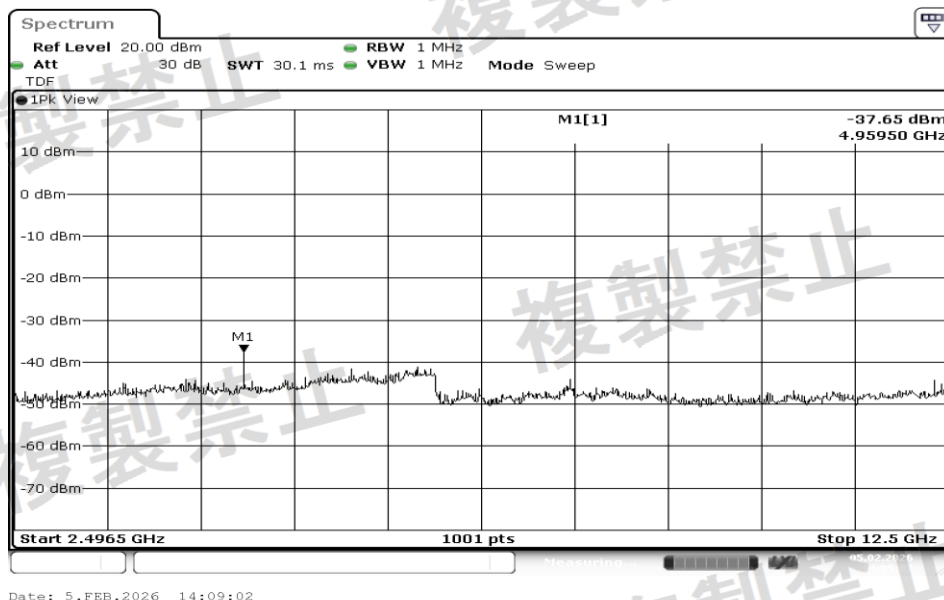


20	Tx Spurious_상온_LE1M_Normal_F3_2480 2496.5-12500 Full Span
----	---

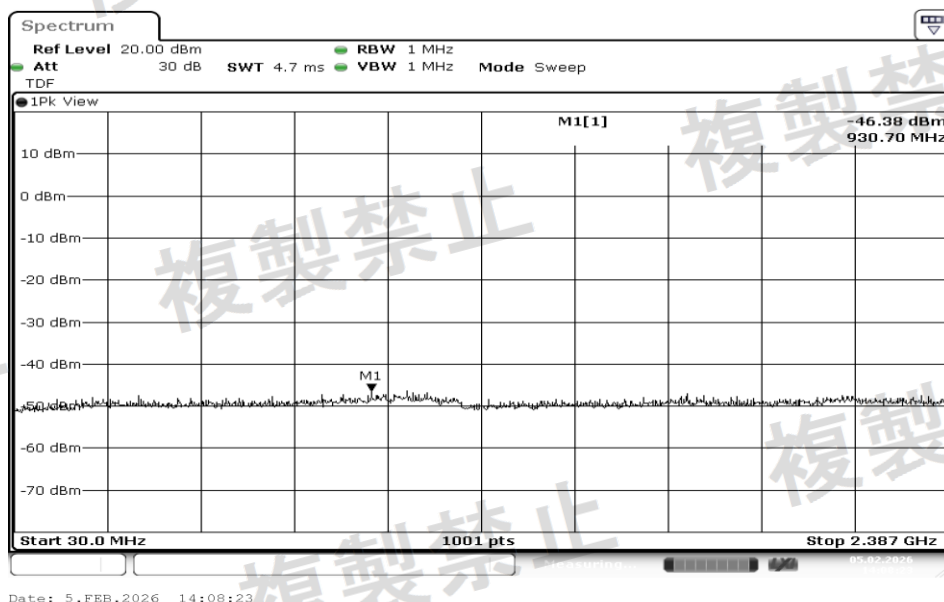


21	Tx Spurious_상온_LE1M_Normal_F3_2480 30-2387 Full Span
----	--

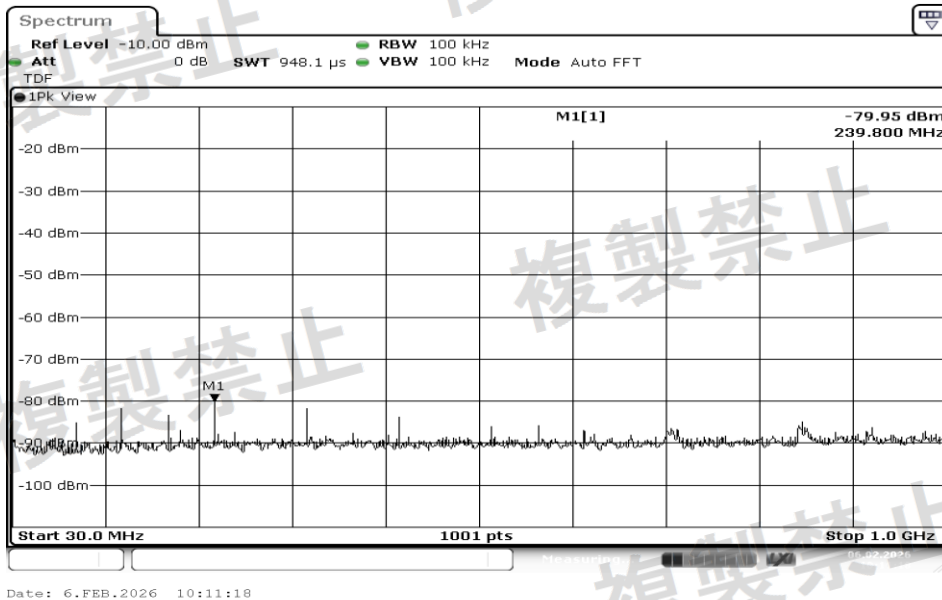


22	Rx Spurious_상온_LE1M_Normal_F1_2402 Left
----	---

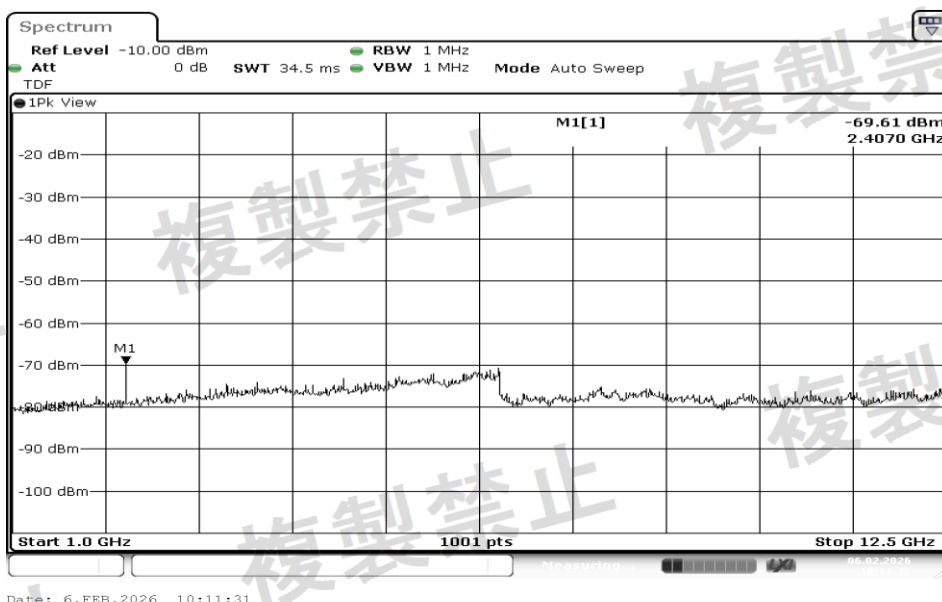


23	Rx Spurious_상온_LE1M_Normal_F1_2402 Right
----	--

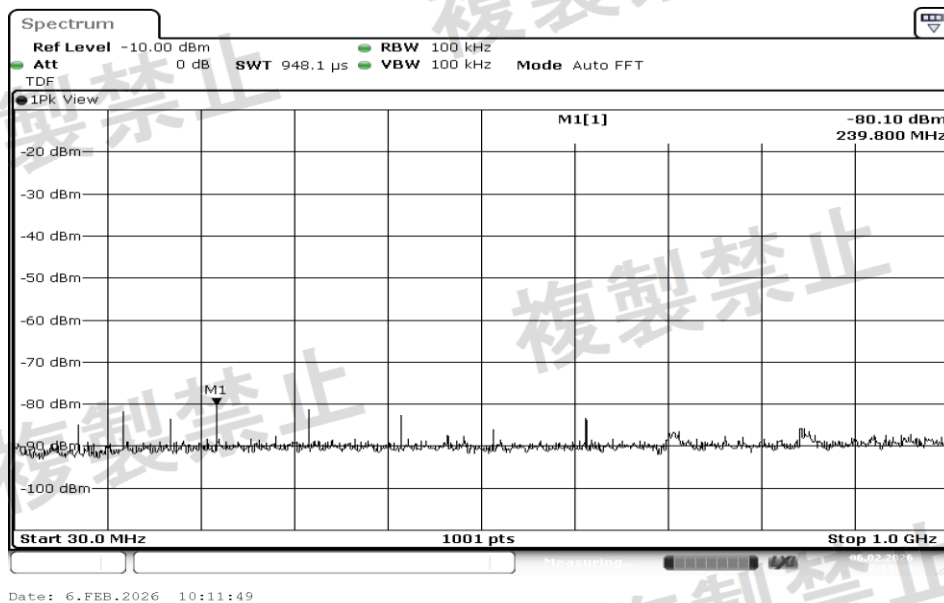


24	Rx Spurious_상온_LE1M_Normal_F2_2440 Left
----	---

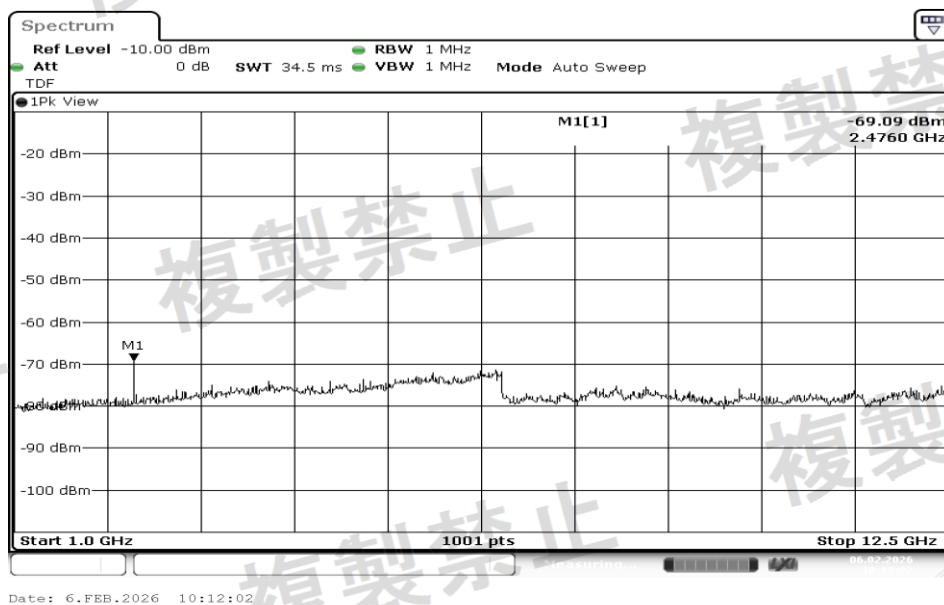

25	Rx Spurious_상온_LE1M_Normal_F2_2440 Right
----	--

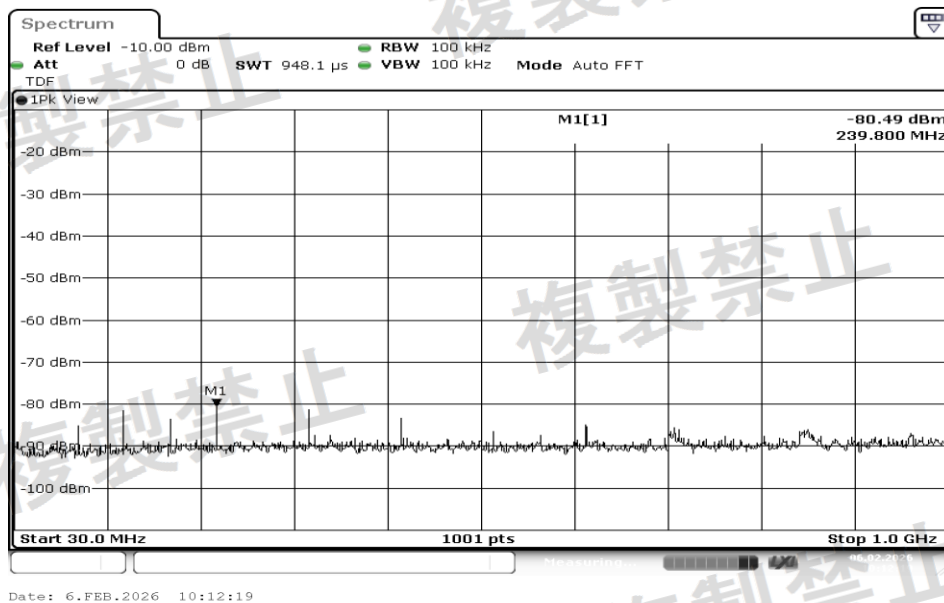

26	Rx Spurious_상온_LE1M_Normal_F3_2480 Left
----	---

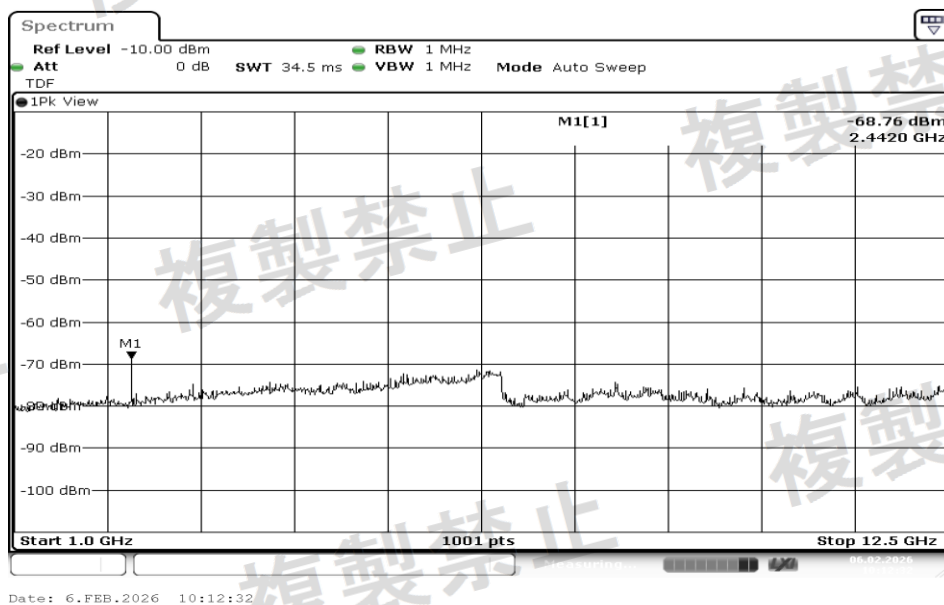

27	Rx Spurious_상온_LE1M_Normal_F3_2480 Right
----	--

Test Result and Measuring equipment for certification

2.4GHz Band advanced low-power data communication system (Article 2-1-19)

Radio Equipment for test	Model or type name:	Test environment	Temperature : 26 °C	Type of radio, frequency and antenna power			Bluetooth LE 2M		Antenna 1 PCB Antenna	
			Humidity : 52 % R.H				F1D, 2402~2480 MHz, 2MHz Separation: 40 channels		10 mW	
Test Engineer	Ye-bhin, Park		Test site	ONETECH, S/R1		Test date	2026.01.23 ~ 2026.02.10		Test method	Appendix No.43


E q u i p m e n t	Model and type name	Serial number	Manufacturer	Calibrated Date	Calibration Company	Note
	SPECTRUM ANALYZER (FSV3044)	101758	Rohde & Schwarz	2025.07.02	KC LAB	Based on Japanese Radio Law 24-2-4-2-ha
	SPECTRUM ANALYZER (FSV30)	101199	Rohde & Schwarz	2026.01.13	KC LAB	Based on Japanese Radio Law 24-2-4-2-ha
	SIGNAL GENERATOR (SMB100A)	177648	Rohde & Schwarz	2026.01.14	KC LAB	Based on Japanese Radio Law 24-2-4-2-ha
	BLUETOOTH TESTER (TC-3000C)	3000C000634	TESCOM	2026.01.14	KC LAB	Based on Japanese Radio Law 24-2-4-2-ha
	WIRELESS CONNECTIVITY TESTER (CMW270)	101325	Rohde & Schwarz	2026.01.13	KC LAB	Based on Japanese Radio Law 24-2-4-2-ha
	DC POWER SUPPLY (ZUP36-6)	6MJ-850Z16-0014	TDK-Lambda	2026.01.12	KC LAB	Based on Japanese Radio Law 24-2-4-2-ha
	DIRECTIONAL COUPLER (152610)	214012	KRYTAR	2026.01.15	KC LAB	Based on Japanese Radio Law 24-2-4-2-ha
	MICROWAVE PEAK POWER SENSOR(MA24408A)	12199	Anritsu	2026.01.14	KC LAB	Based on Japanese Radio Law 24-2-4-2-ha

Test result	Electric performance	Voltage		V	Limit	DC 4.0 V (normal)			DC 4.4 V (high)			DC 3.7 V (low)			Note
		Test Frequency		MHz		2402	2440	2480	2402	2440	2480	2402	2440	2480	
		Frequency error(measured frequency)		MHz		2401.996719	2439.995469	2479.998907	2401.996875	2439.995	2479.994219	2401.995313	2439.9975	2479.994844	
		Frequency error		ppm	50	-1.36594505	-1.85696721	-0.44072581	-1.30099917	-2.04918033	-2.33104839	-1.95129059	-1.02459016	-2.07903226	
		Occupied bandwidth		MHz	26	2.13	2.13	2.12	2.13	2.13	2.13	2.13	2.13	2.13	
		Spreading bandwidth		MHz	NA										
		Spreading Factor		-	NA										
		Spurious	(measured frequency)	-	MHz	2 385.80	1 130.80	1 104.90	2 385.80	958.90	1 733.60	2 385.80	2 098.60	2 378.80	
				30 ~ 2387 MHz	μ W/MHz	2.5	0.3606	0.0212	0.0209	0.3581	0.0226	0.0237	0.3784	0.0198	0.0231
			(measured frequency)	-	MHz	2 399.99	2 391.51	2 394.59	2 400.00	2 392.25	2 389.53	2 400.00	2 391.62	2 398.25	
				2387 ~ 2400 MHz	μ W/MHz	25	5.2845	0.0264	0.0231	5.5847	0.0298	0.0248	5.5976	0.0262	0.0249
			(measured frequency)	-	MHz	2 496.43	2 487.62	2 495.66	2 483.78	2 487.95	2 494.40	2 496.43	2 488.65	2 494.47	
				2483.5 ~ 2496.5 MHz	μ W/MHz	25	0.0231	0.0369	0.3614	0.0237	0.0431	0.3873	0.0277	0.0301	0.3758
		(measured frequency)	-	MHz	6 878.50	6 848.50	2 501.50	6 778.50	6 828.50	2 501.50	6 768.50	4 879.50	2 501.50		
			2496.5 ~ 12500 MHz	μ W/MHz	2.5	0.0883	0.0940	0.1435	0.0736	0.0782	0.1455	0.0759	0.1038	0.1941	
			Antenna power		mW	10	5.52	5.97	5.78	5.44	5.89	5.67	5.59	5.86	5.81
			deviation		%	-80	-44.80	-40.30	-42.20	-45.60	-41.10	-43.30	-44.10	-41.40	-41.90
					20										
		Collateral Emission	(measured frequency)	-	MHz	239.80	239.80	239.80	239.80	239.80	239.80	239.80	239.80	239.80	
			30 ~ 1000 MHz	nW	4	0.0091	0.0095	0.0093	0.0099	0.0085	0.0113	0.0100	0.0100	0.0091	
			(measured frequency)	-	MHz	2 407.00	6 922.00	6 934.00	6 865.00	6 750.00	6 784.00	6 704.00	6 773.00	6 980.00	
			1000 ~ 12500 MHz	nW	20	0.1610	0.0673	0.0745	0.0726	0.0801	0.0777	0.0763	0.0864	0.0745	
		E.I.R.P.		mW/MHz	NA										
		Hopping Frequency staying time		sec	NA										
		Interference Protection (Deveice ID)		yes	Complies	Complies	Complies	Complies	Complies	Complies	Complies	Complies	Complies		
		Carrier Sense		NA											


Antenna Gain: 1.58 dBi
Allowed Maximum E.I.R.P : 11.58 dBm

NA = Not Applicable


Test Band			LE 2M								
Antenna			-								
Test Parameters for Channel Bandwidths											
Test Item	No.	Mode	Channel	Bandwidthh	RU Tone	RB index	Verdict				
Duty Cycle	1	LE 2M	2402				Pass				
	2		2440				Pass				
	3		2480				Pass				
Frequency Error	4		2402				Pass				
	5		2440				Pass				
	6		2480				Pass				
OBW	7		2402				Pass				
	8		2440				Pass				
	9		2480				Pass				
Tx Spurious	10		2402				Pass				
	11						Pass				
	12						Pass				
	13										
	14										
	15						Pass				
	16		2441				Pass				
	17						Pass				
	18						Pass				
	19						Pass				
	20						Pass				
	21						Pass				
	Collateral Emission		22				2480	Pass			
			23				2402				Pass
			24								Pass
			25				2441				Pass
			26								Pass
27		2480				Pass					
28						Pass					
29			Pass								

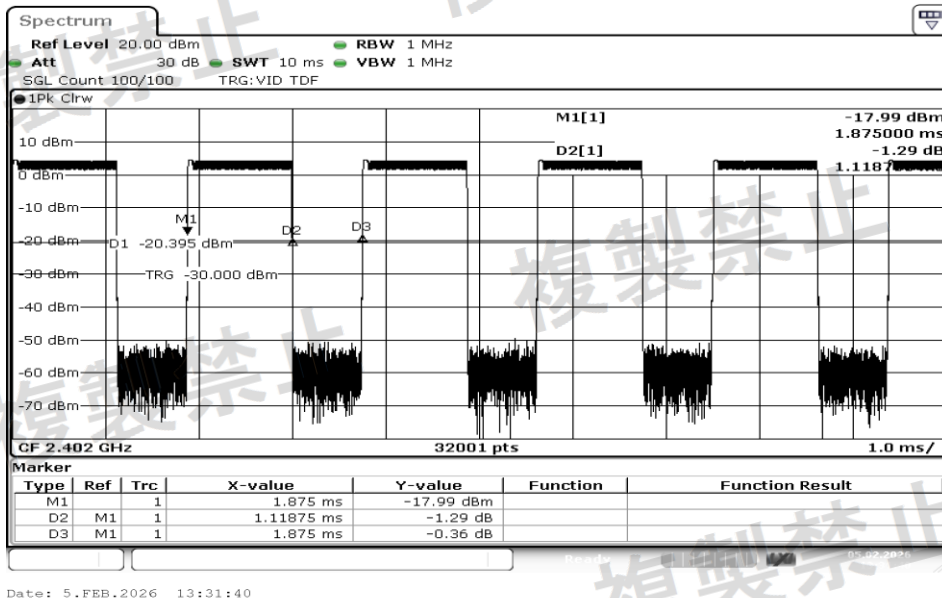


1	Duty Cycle_상온_LE2M_Normal_F1_2402
---	-----------------------------------

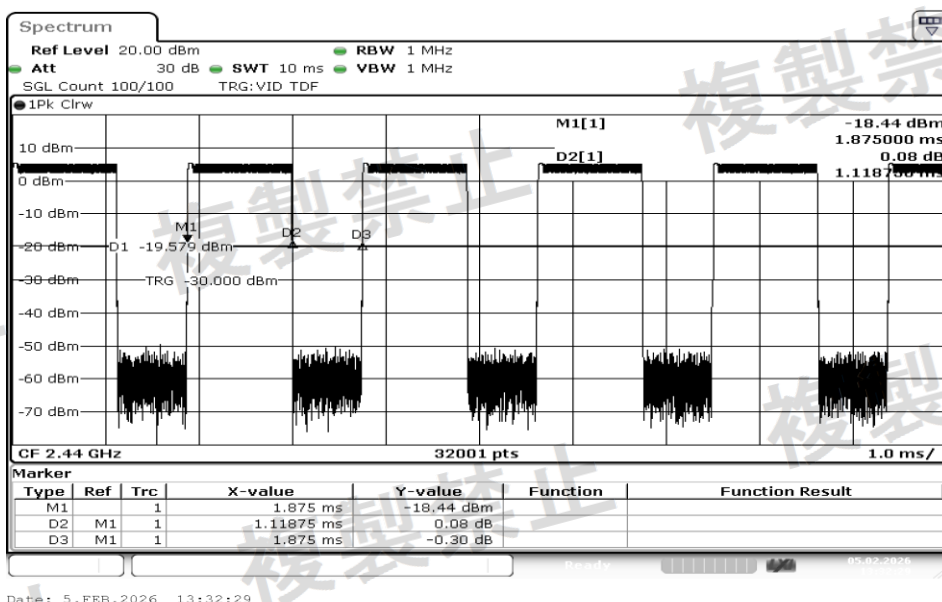


2	Duty Cycle_상온_LE2M_Normal_F2_2440
---	-----------------------------------

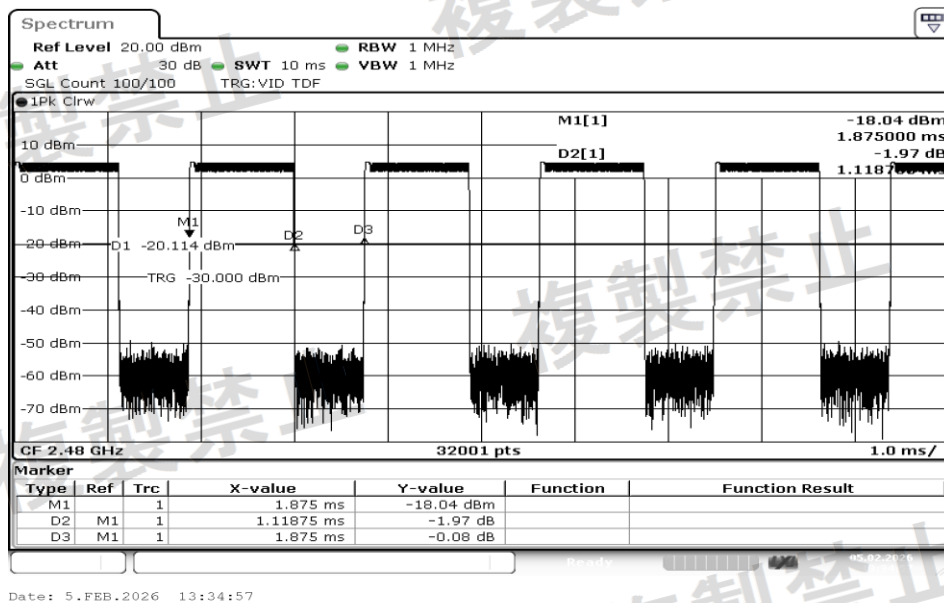


3	Duty Cycle_상온_LE2M_Normal_F3_2480
---	-----------------------------------

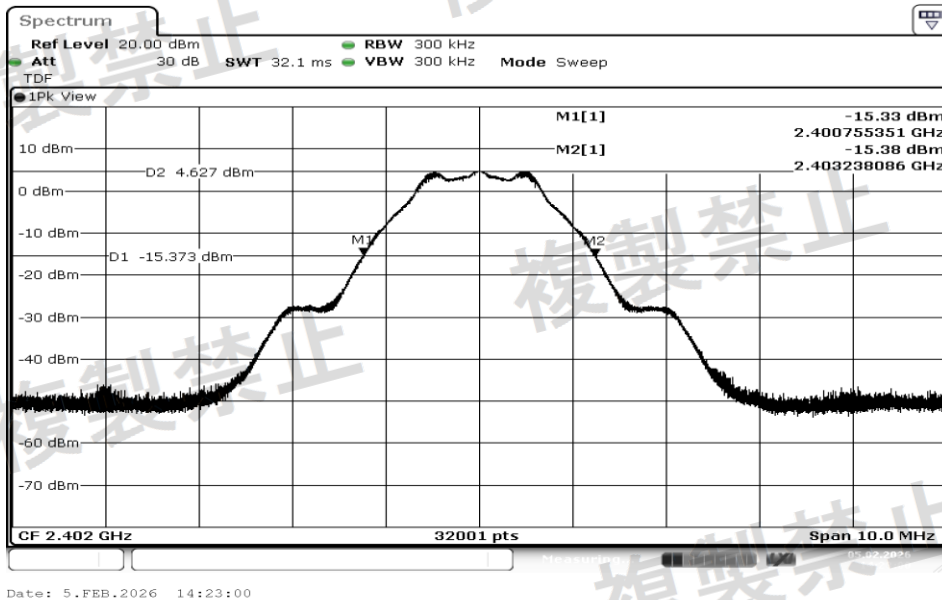


4	Frequency Error_상온_LE2M_Normal_F1_2402
---	--

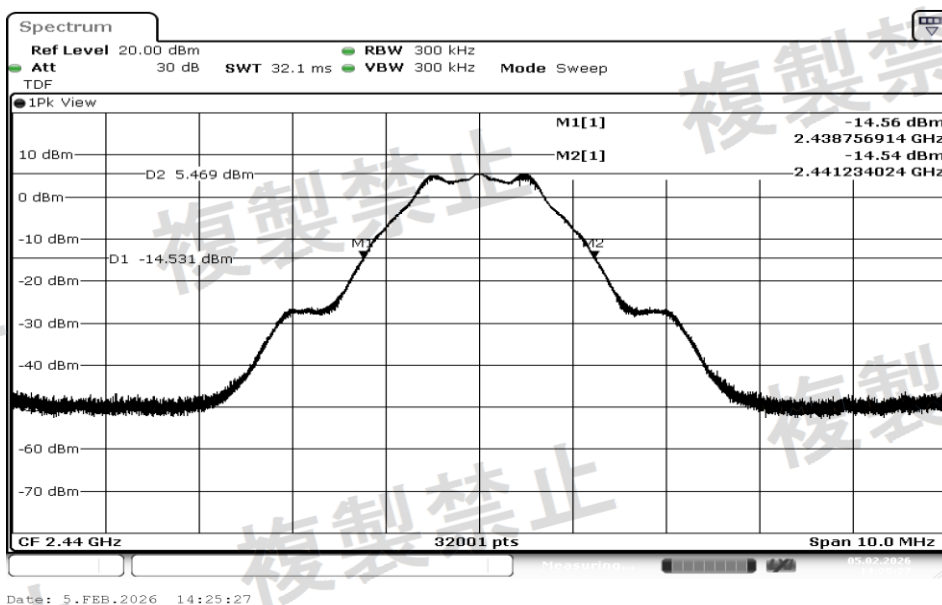


5	Frequency Error_상온_LE2M_Normal_F2_2440
---	--

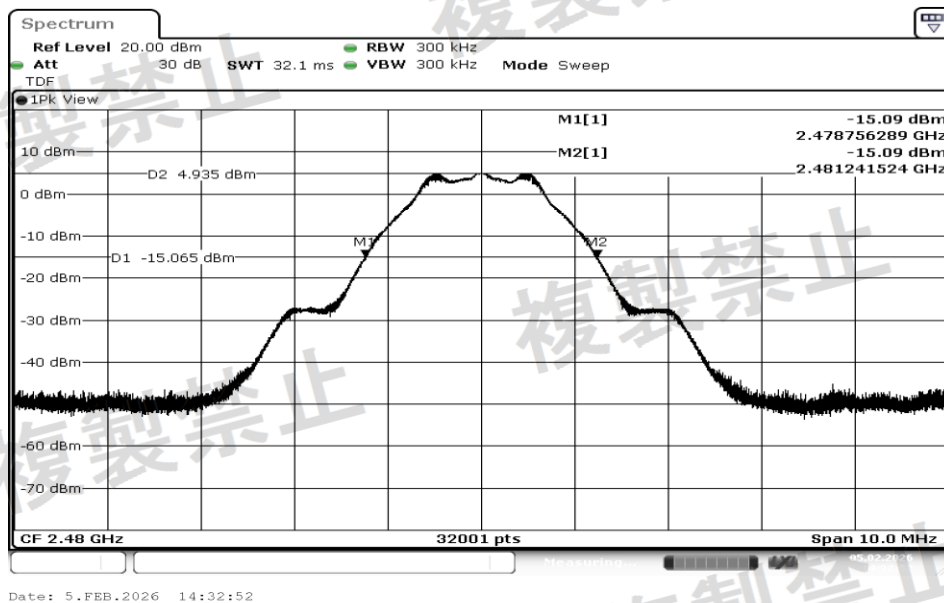


6	Frequency Error_상온_LE2M_Normal_F3_2480
---	--

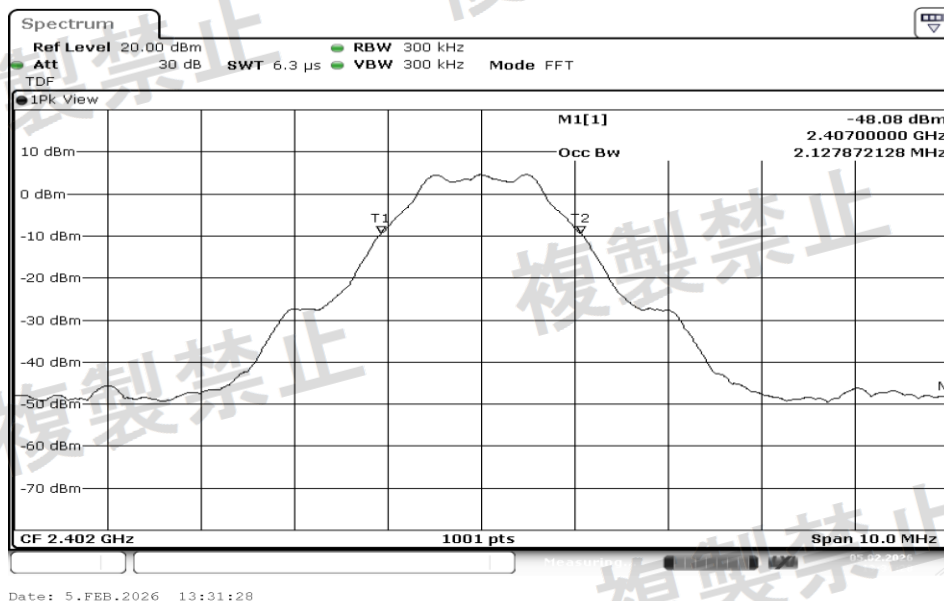


7	OBW_상온_LE2M_Normal_F1_2402
---	----------------------------

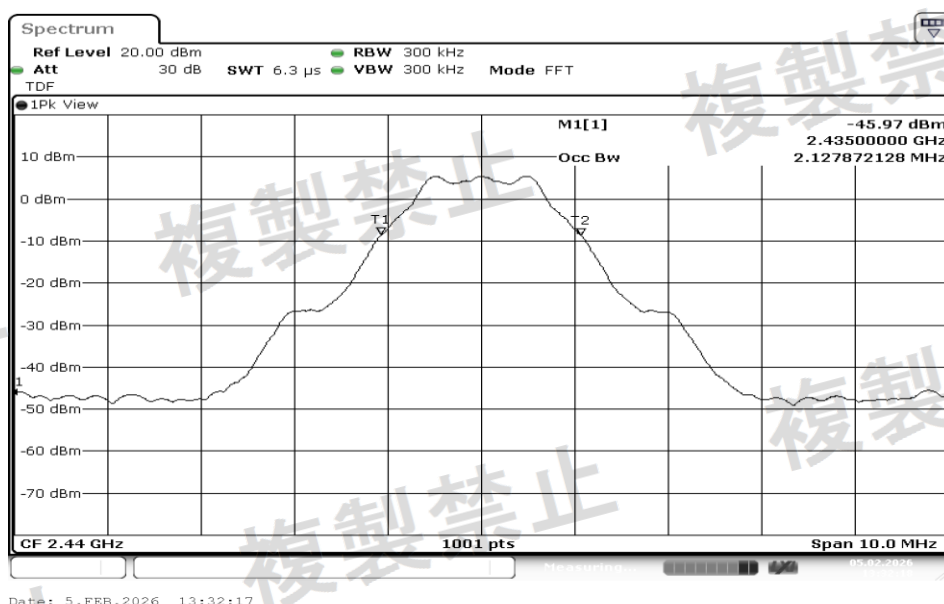


8	OBW_상온_LE2M_Normal_F2_2440
---	----------------------------

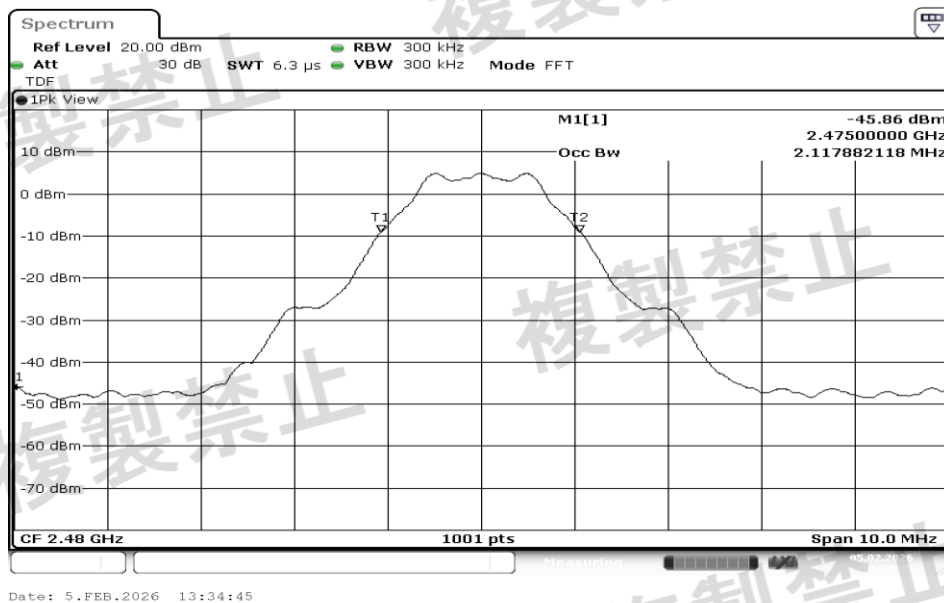


9	OBW_상온_LE2M_Normal_F3_2480
---	----------------------------

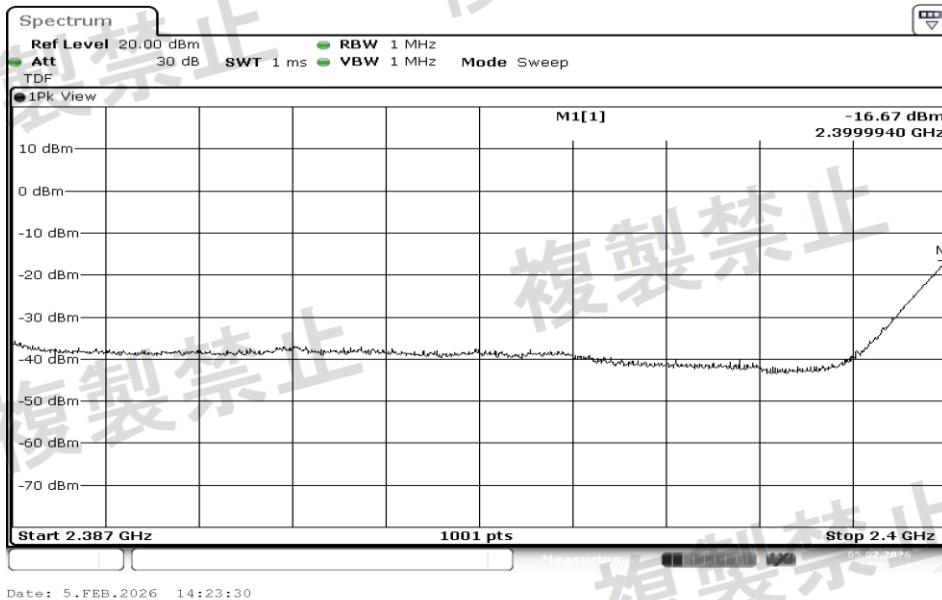


10	Tx Spurious_상온_LE2M_Normal_F1_2402 2387-2400 Full Span
----	--

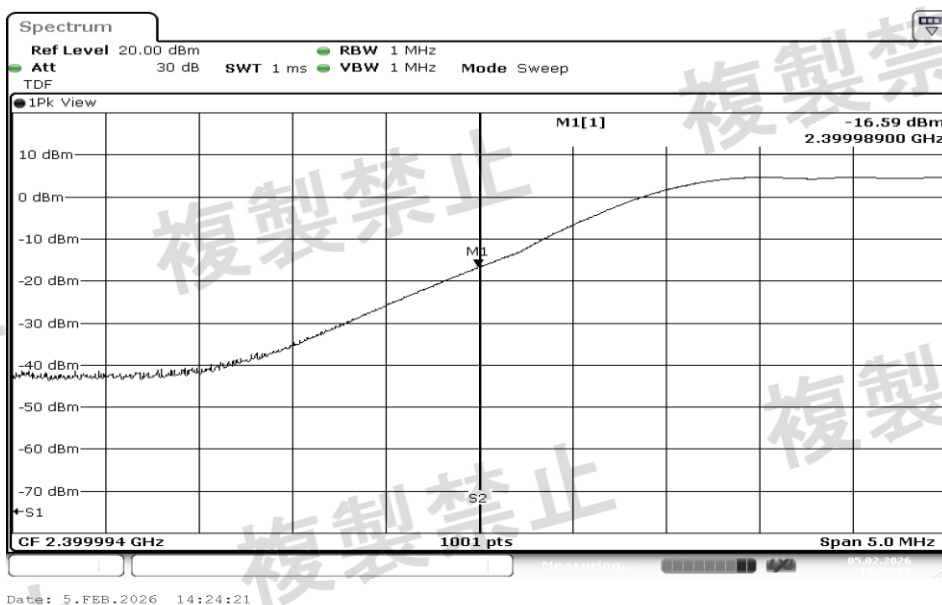


11	Tx Spurious_상온_LE2M_Normal_F1_2402 2387-2400 Peak Zoom
----	--

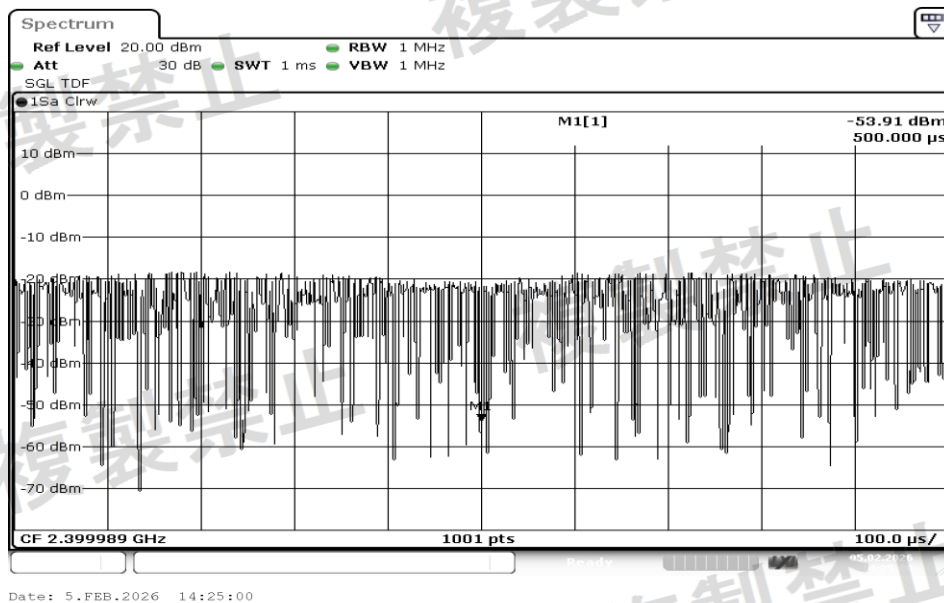


12	Tx Spurious_상온_LE2M_Normal_F1_2402 2387-2400 RMS
----	--

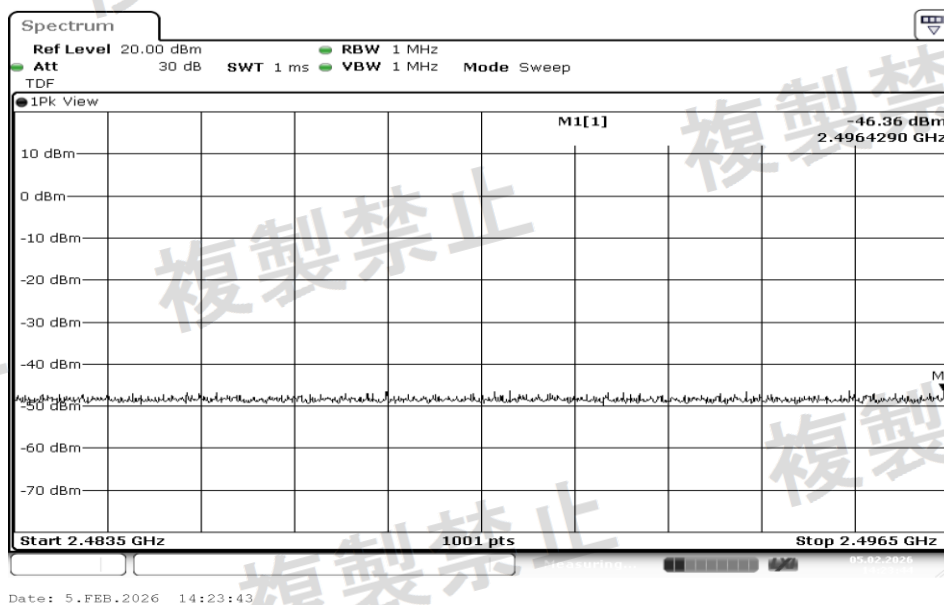


13	Tx Spurious_상온_LE2M_Normal_F1_2402 2483.5-2496.5 Full Span
----	--

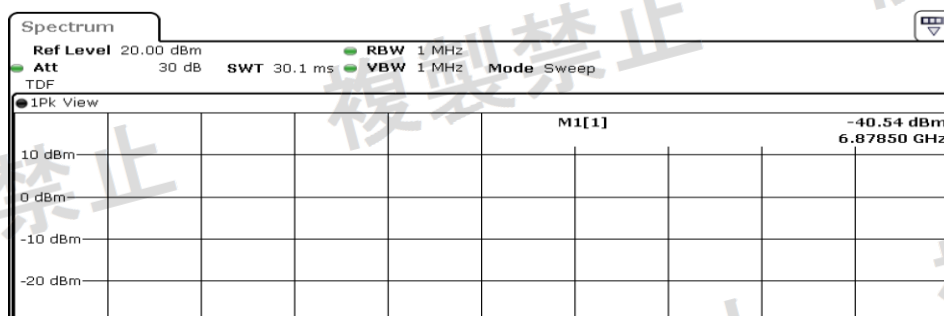


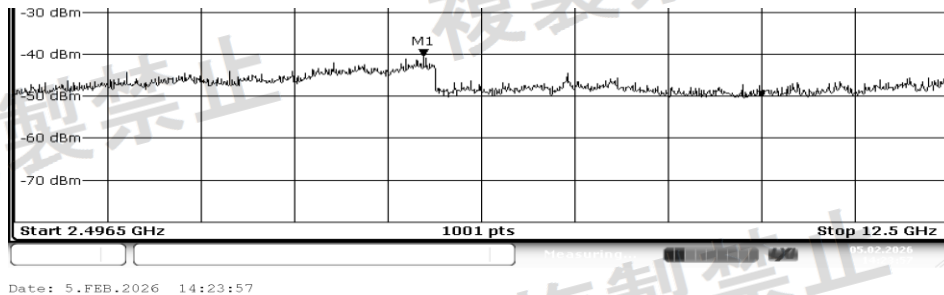


14 Tx Spurious_상온_LE2M_Normal_F1_2402 2496.5-12500 Full Span

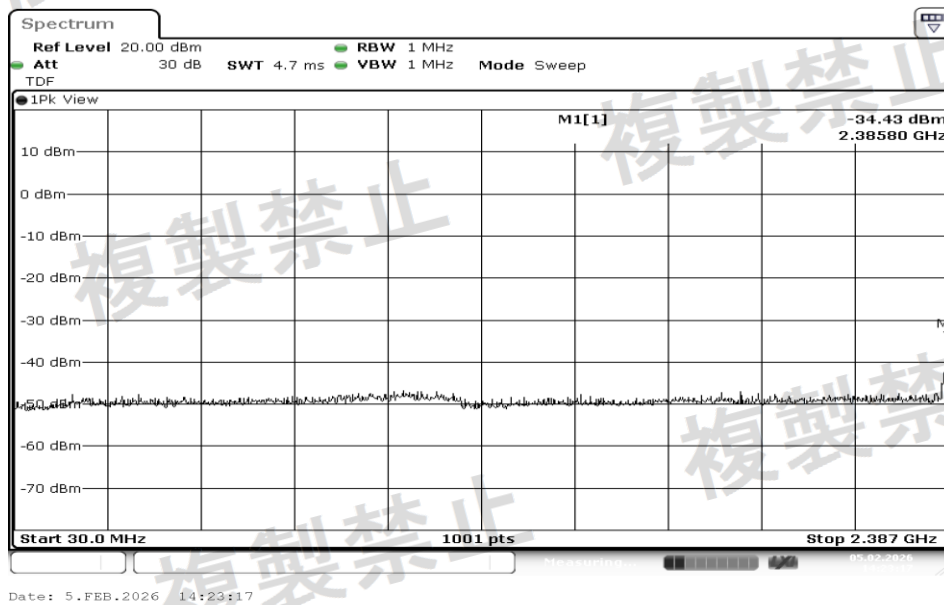


15 Tx Spurious_상온_LE2M_Normal_F1_2402 30-2387 Full Span

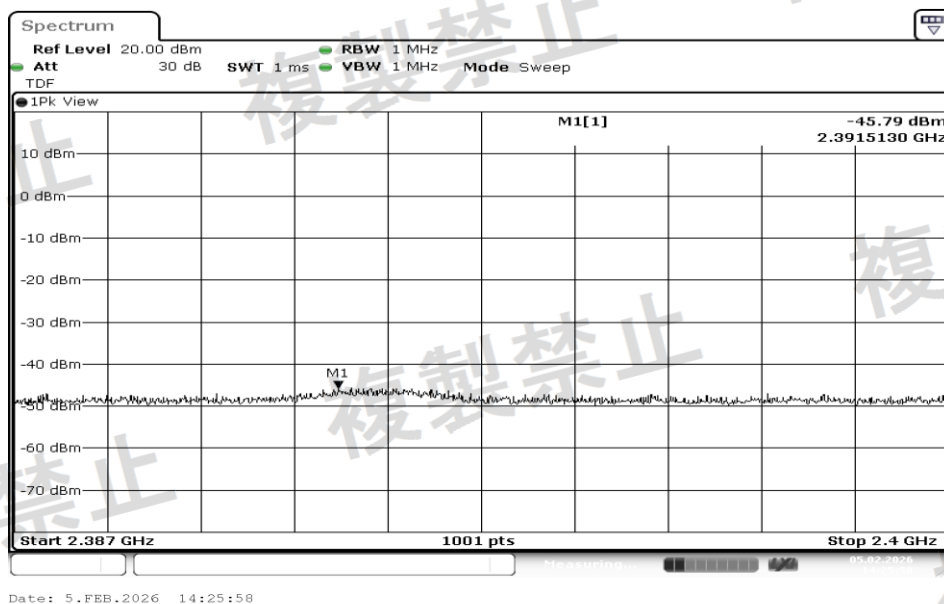


16 Tx Spurious_상온_LE2M_Normal_F2_2440 2387-2400 Full Span

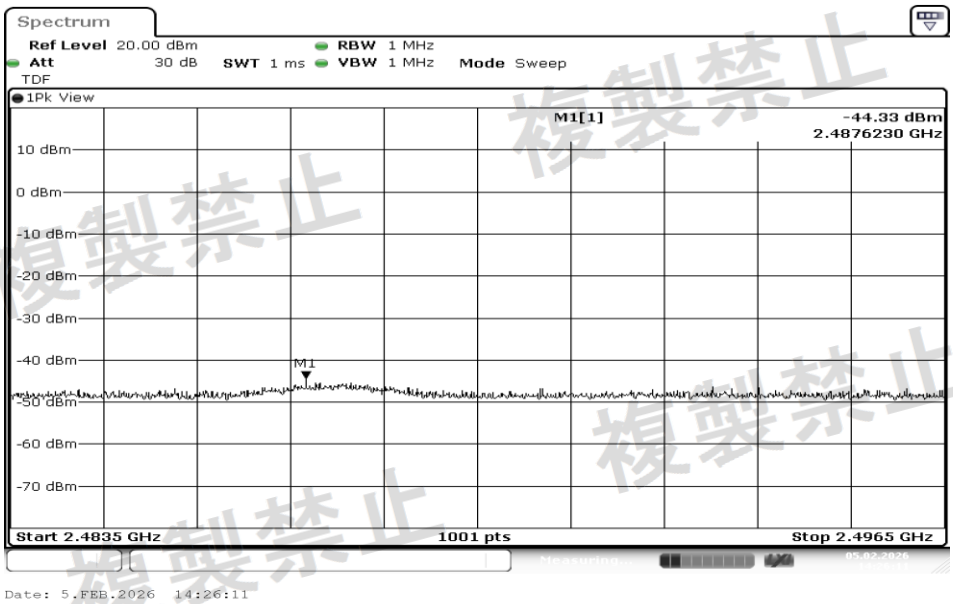


17 Tx Spurious_상온_LE2M_Normal_F2_2440 2483.5-2496.5 Full Span

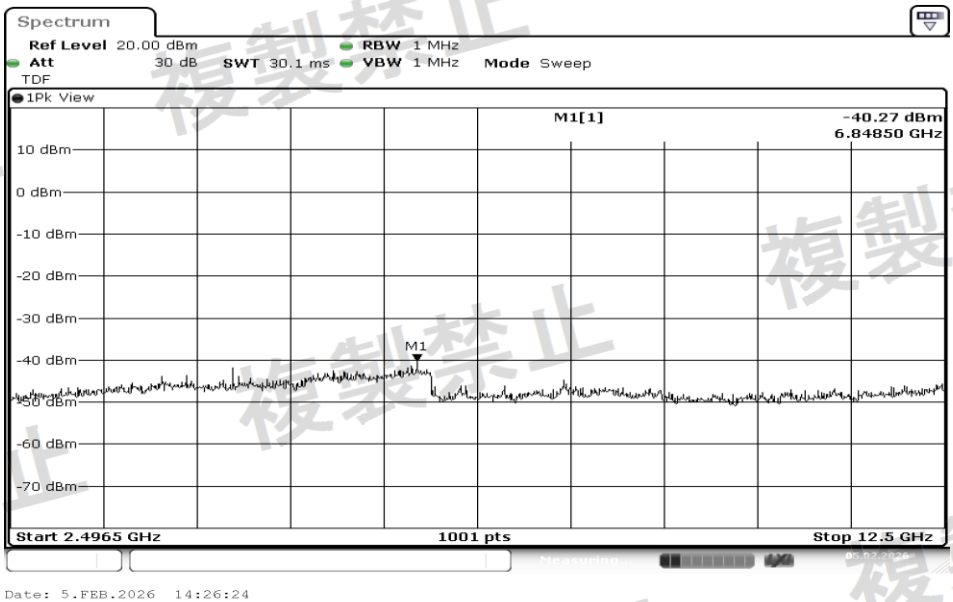


18 Tx Spurious_상온_LE2M_Normal_F2_2440 2496.5-12500 Full Span




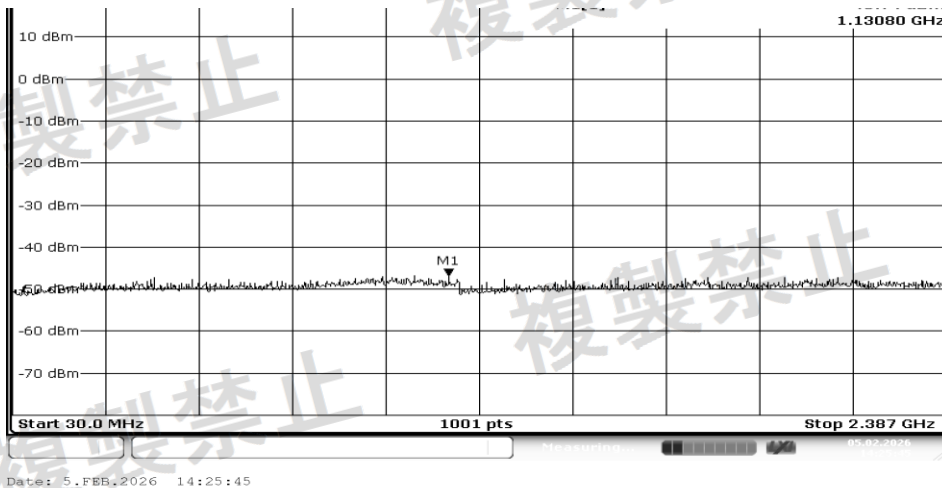


19 Tx Spurious_상온_LE2M_Normal_F2_2440 30-2387 Full Span

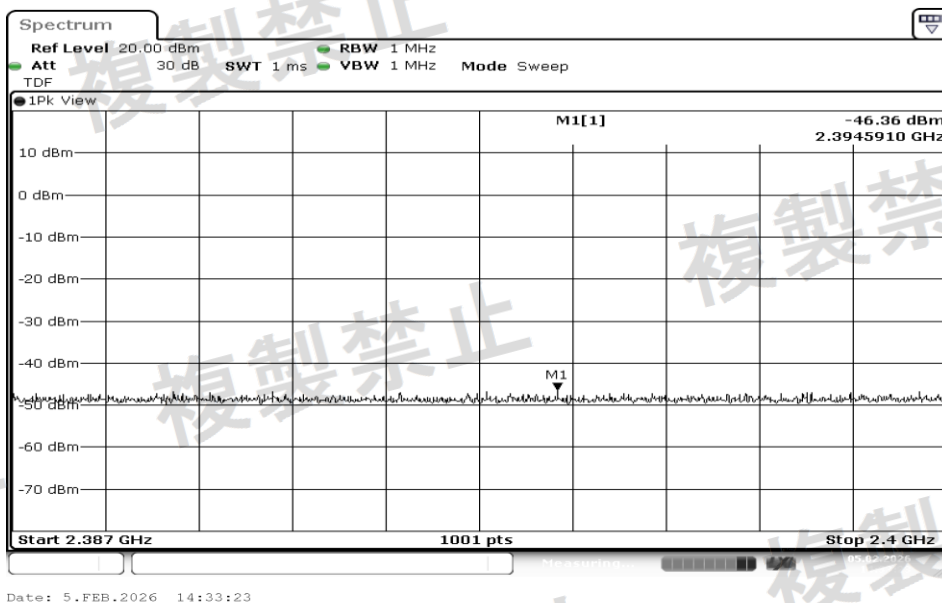

20 Tx Spurious_상온_LE2M_Normal_F3_2480 2387-2400 Full Span

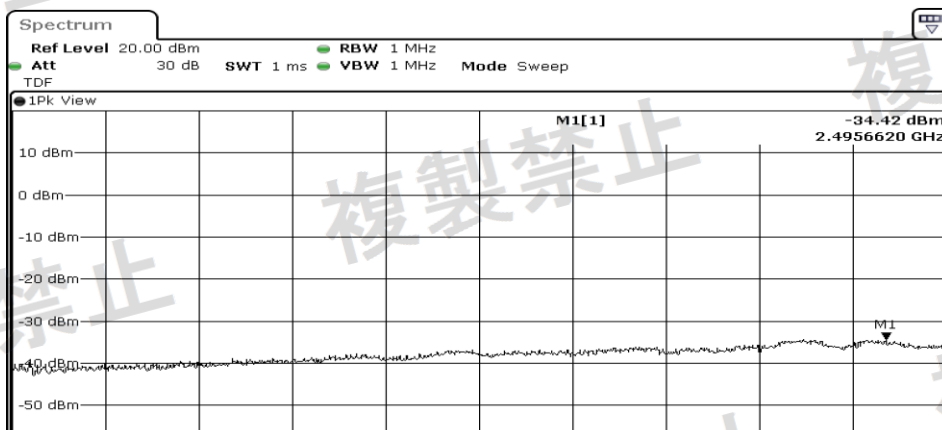


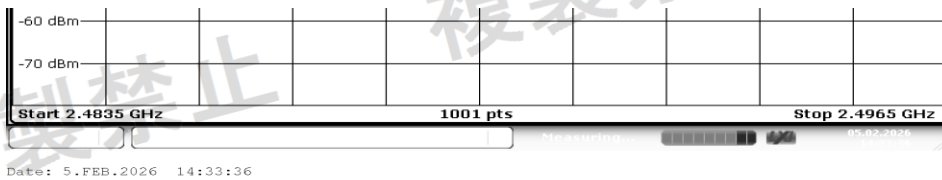


21 Tx Spurious_상온_LE2M_Normal_F3_2480 2483.5-2496.5 Full Span




22 Tx Spurious_상온_LE2M_Normal_F3_2480 2496.5-12500 Full Span

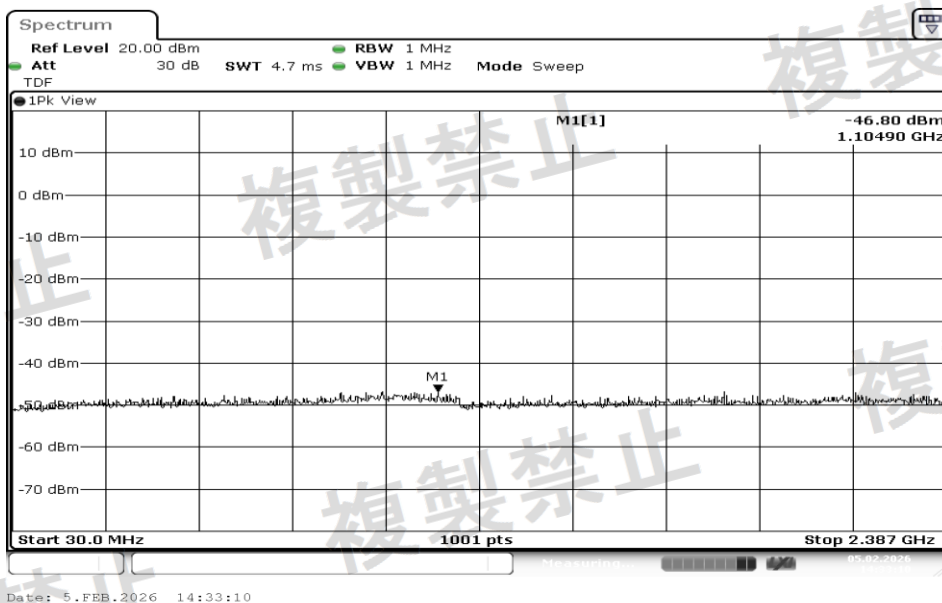


23 Tx Spurious_상온_LE2M_Normal_F3_2480 30-2387 Full Span

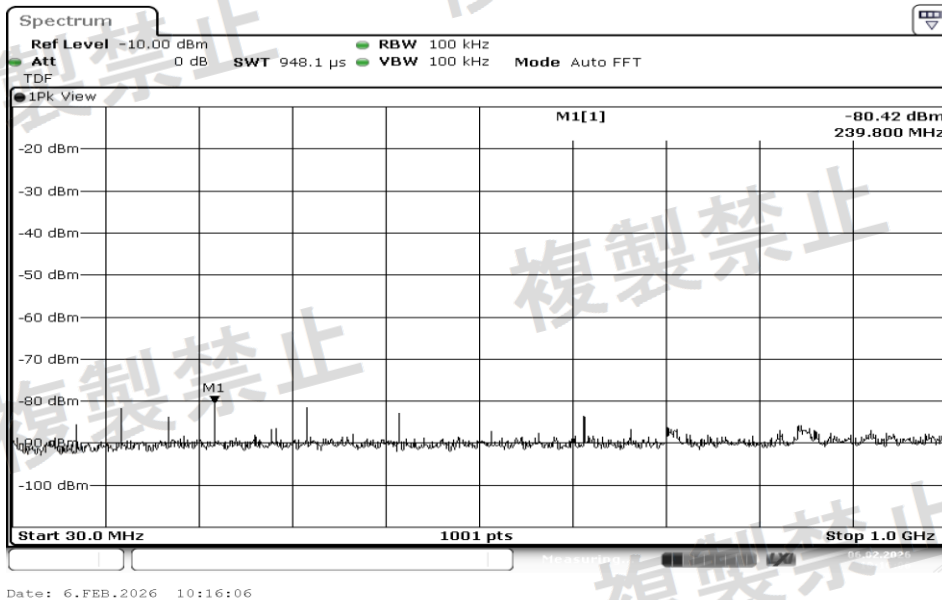


24	Rx Spurious_상온_LE2M_Normal_F1_2402 Left
----	---

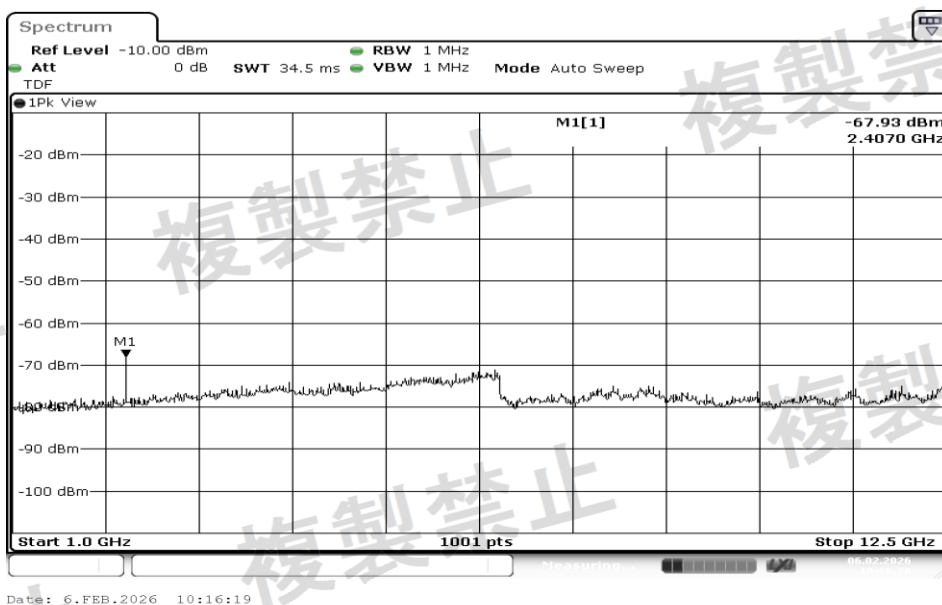


25	Rx Spurious_상온_LE2M_Normal_F1_2402 Right
----	--

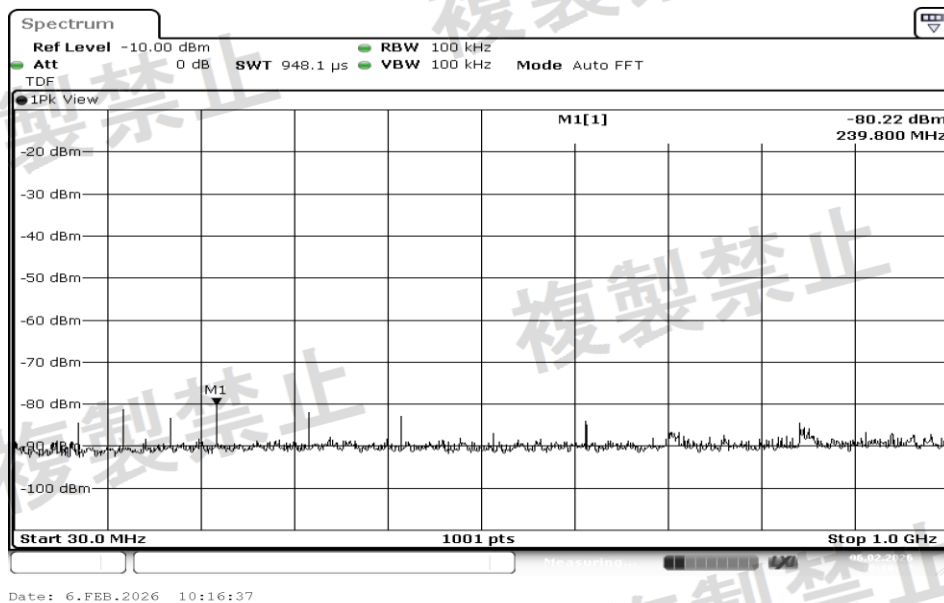


26	Rx Spurious_상온_LE2M_Normal_F2_2440 Left
----	---

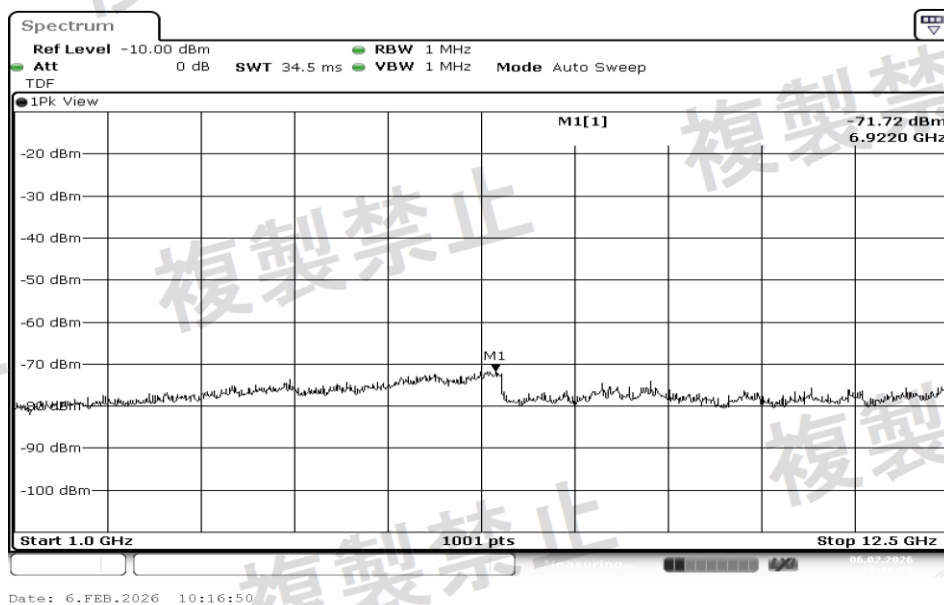


27	Rx Spurious_상온_LE2M_Normal_F2_2440 Right
----	--

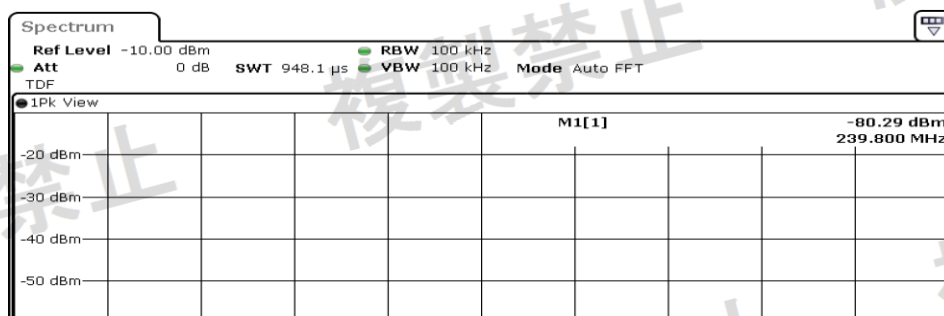

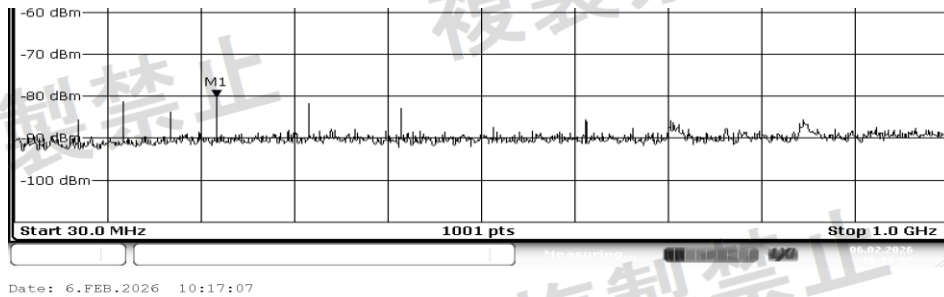

28	Rx Spurious_상온_LE2M_Normal_F3_2480 Left
----	---

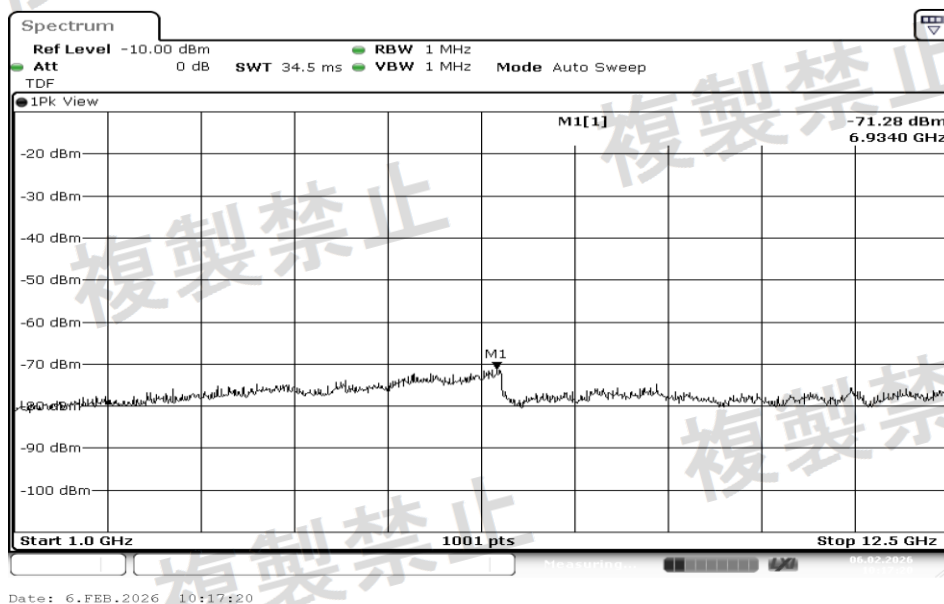

29	Rx Spurious_상온_LE2M_Normal_F3_2480 Right
----	--