
操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA-MIMO
基 本 波 頻 率 ：	CH 149：5745 MHz (OOBE)	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 05 月 28 日	測 試 者 ：	鄭詠璋

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5607.69	55.6 PK	68.2	-12.6	1.64 H	23	51.0	4.6
2	#5954.49	57.4 PK	68.2	-10.8	1.64 H	23	52.1	5.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

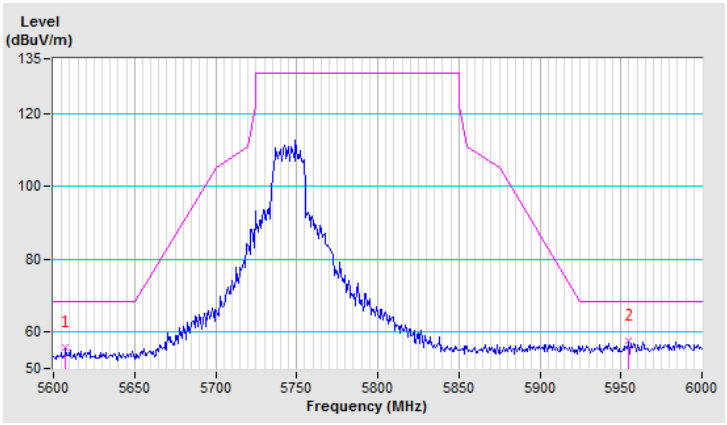


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA-MIMO
基 本 波 頻 率 ：	CH 149：5745 MHz (OOBE)	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 05 月 28 日	測 試 者 ：	鄭詠璋

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5612.82	55.2 PK	68.2	-13.0	3.86 V	346	50.6	4.6
2	#5994.87	57.6 PK	68.2	-10.6	3.86 V	346	52.2	5.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

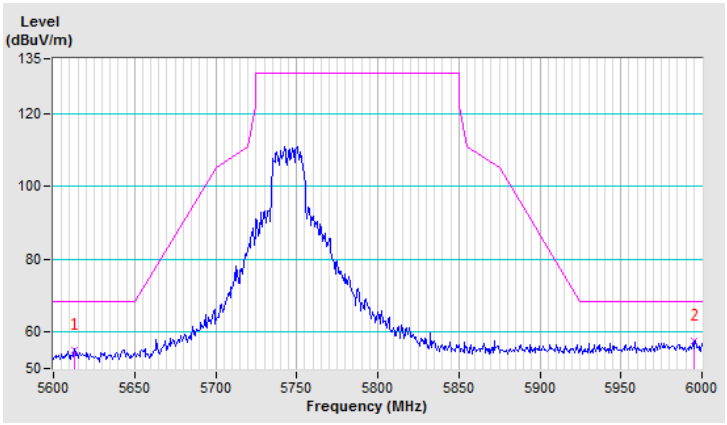


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA-MIMO
基 本 波 頻 率 ：	CH 157：5785 MHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 05 月 28 日	測 試 者 ：	鄭詠璋

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5785.00	115.1 PK			1.42 H	303	74.8	40.3
2	*5785.00	103.3 AV			1.42 H	303	63.0	40.3
3	11570.00	60.0 PK	74.0	-14.0	1.15 H	120	42.3	17.7
4	11570.00	46.9 AV	54.0	-7.1	1.15 H	120	29.2	17.7
5	#17355.00	-	-	-	-	-	-	-
6	#23140.00	-	-	-	-	-	-	-
7	#28925.00	-	-	-	-	-	-	-
8	#34710.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

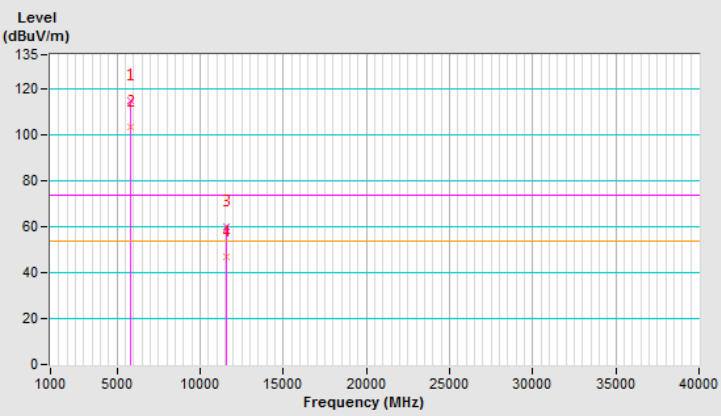


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA-MIMO
基 本 波 頻 率 ：	CH 157：5785 MHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 05 月 28 日	測 試 者 ：	鄭詠璋

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5785.00	115.7 PK			3.49 V	355	75.4	40.3
2	*5785.00	104.0 AV			3.49 V	355	63.7	40.3
3	11570.00	61.3 PK	74.0	-12.7	3.02 V	111	43.6	17.7
4	11570.00	48.3 AV	54.0	-5.7	3.02 V	111	30.6	17.7
5	#17355.00	-	-	-	-	-	-	-
6	#23140.00	-	-	-	-	-	-	-
7	#28925.00	-	-	-	-	-	-	-
8	#34710.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

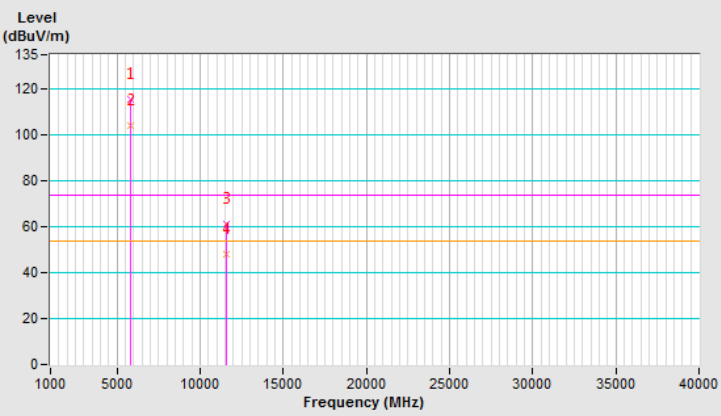


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA-MIMO
基 本 波 頻 率 ：	CH 157：5785 MHz (OOBE)	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 05 月 28 日	測 試 者 ：	鄭詠璋

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5614.10	55.2 PK	68.2	-13.0	1.42 H	303	50.6	4.6
2	#5998.08	57.7 PK	68.2	-10.5	1.42 H	303	52.3	5.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

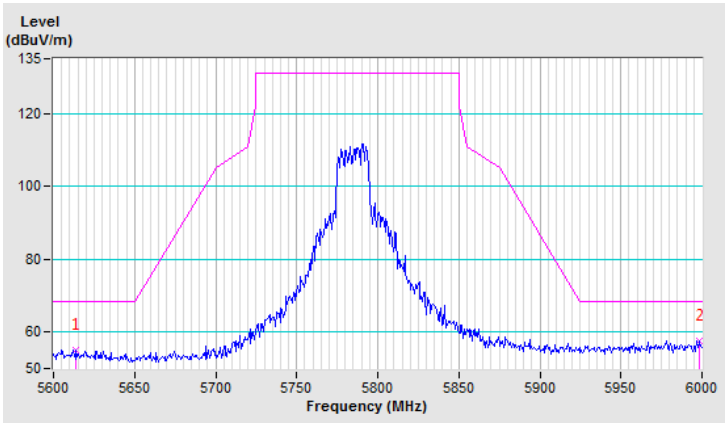


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA-MIMO
基 本 波 頻 率 ：	CH 157：5785 MHz (OOBE)	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 05 月 28 日	測 試 者 ：	鄭詠璋

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5611.54	54.3 PK	68.2	-13.9	3.49 V	355	49.7	4.6
2	#5977.56	56.8 PK	68.2	-11.4	3.49 V	355	51.4	5.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

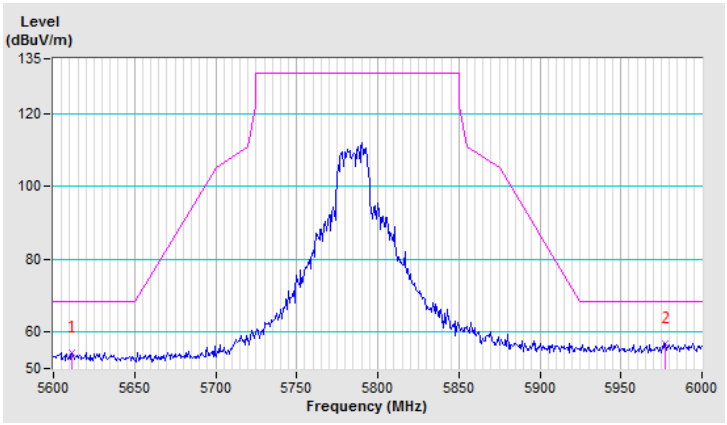


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA-MIMO
基 本 波 頻 率 ：	CH 165：5825 MHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 05 月 28 日	測 試 者 ：	鄭詠璋

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5825.00	117.7 PK			1.60 H	25	77.3	40.4
2	*5825.00	104.7 AV			1.60 H	25	64.3	40.4
3	11650.00	60.1 PK	74.0	-13.9	1.02 H	104	42.6	17.5
4	11650.00	47.5 AV	54.0	-6.5	1.02 H	104	30.0	17.5
5	#17475.00	65.6 PK	68.2	-2.6	1.21 H	180	41.9	23.7
6	#23300.00	-	-	-	-	-	-	-
7	#29125.00	-	-	-	-	-	-	-
8	#34950.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

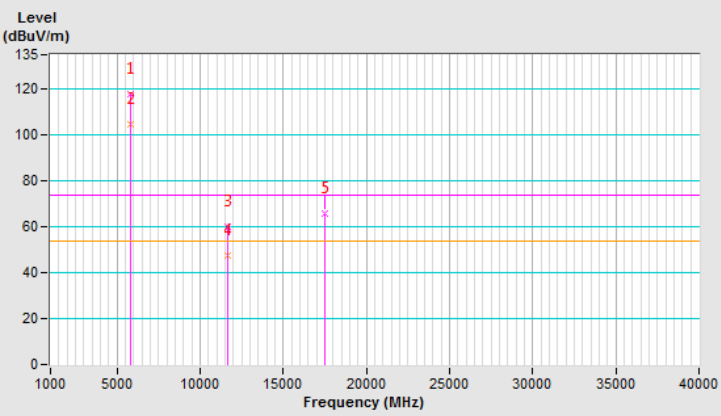


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA-MIMO
基 本 波 頻 率 ：	CH 165：5825 MHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 05 月 28 日	測 試 者 ：	鄭詠璋

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5825.00	116.0 PK			3.40 V	344	75.6	40.4
2	*5825.00	104.3 AV			3.40 V	344	63.9	40.4
3	11650.00	62.3 PK	74.0	-11.7	1.24 V	63	44.8	17.5
4	11650.00	49.3 AV	54.0	-4.7	1.24 V	63	31.8	17.5
5	#17475.00	65.7 PK	68.2	-2.5	2.36 V	174	42.0	23.7
6	#23300.00	-	-	-	-	-	-	-
7	#29125.00	-	-	-	-	-	-	-
8	#34950.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

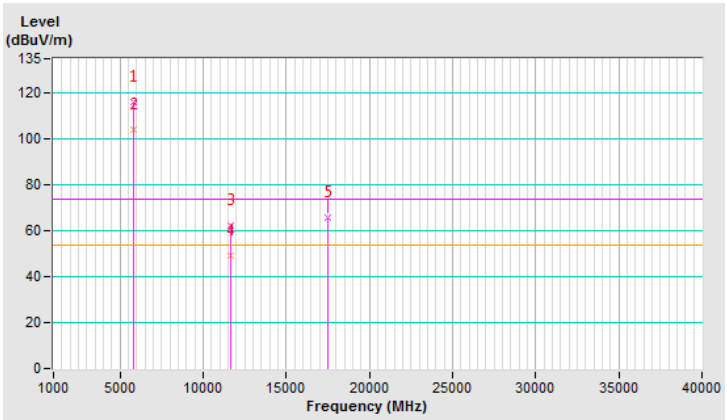


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA-MIMO
基 本 波 頻 率 ：	CH 165：5825 MHz (OOBE)	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 05 月 28 日	測 試 者 ：	鄭詠璋

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5608.97	55.2 PK	68.2	-13.0	1.60 H	25	50.6	4.6
2	#5957.05	57.9 PK	68.2	-10.3	1.60 H	25	52.6	5.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

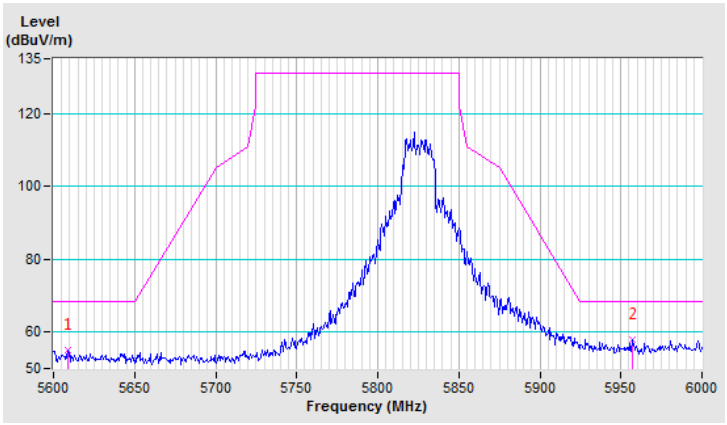


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA-MIMO
基 本 波 頻 率 ：	CH 165：5825 MHz (OOBE)	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 05 月 28 日	測 試 者 ：	鄭詠璋

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5615.38	55.3 PK	68.2	-12.9	3.40 V	344	50.7	4.6
2	#5949.36	57.4 PK	68.2	-10.8	3.40 V	344	52.1	5.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

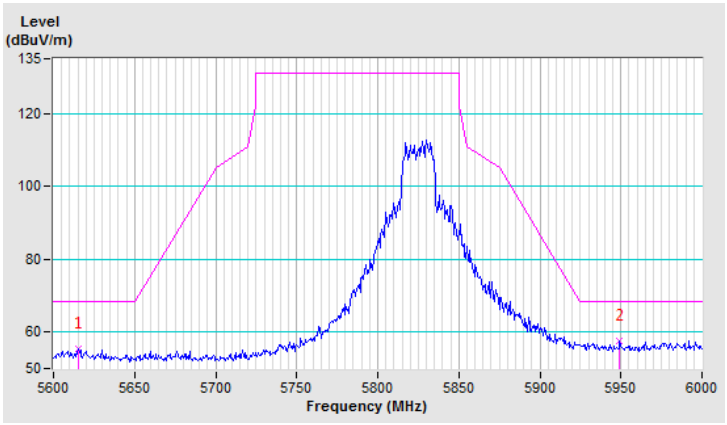


802.11ax (HE40)

操作模式：	發射	調變技術：	OFDMA-MIMO
基本波頻率：	CH 38：5190 MHz	測試儀器：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=3kHz
量測場地溫度：	25℃	量測場地濕度：	70%RH
測試日期：	108 年 05 月 28 日	測試者：	鄭詠璋

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	71.7 PK	74.0	-2.3	1.83 H	299	67.3	4.4
2	5150.00	53.0 AV	54.0	-1.0	1.83 H	299	48.6	4.4
3	*5190.00	107.8 PK			2.17 H	300	68.3	39.5
4	*5190.00	96.5 AV			2.17 H	300	57.0	39.5
5	#10380.00	57.5 PK	68.2	-10.7	1.86 H	321	41.3	16.2
6	15570.00	-	-	-	-	-	-	-
7	20760.00	-	-	-	-	-	-	-
8	#25950.00	-	-	-	-	-	-	-
9	#31140.00	-	-	-	-	-	-	-
10	#36330.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

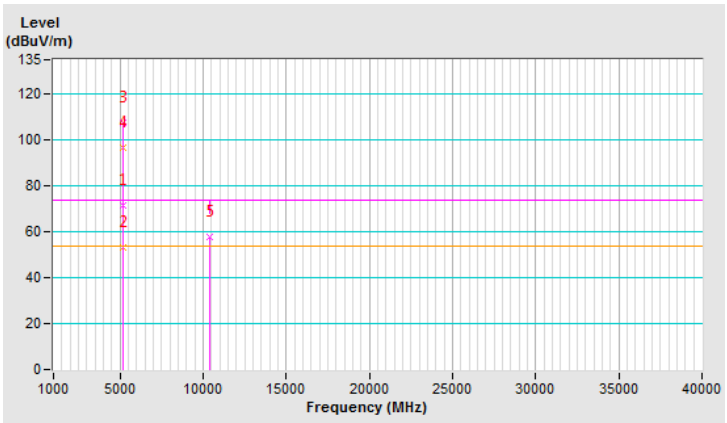


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA-MIMO
基 本 波 頻 率 ：	CH 38：5190 MHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=3kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 05 月 28 日	測 試 者 ：	鄭詠璋

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	69.4 PK	74.0	-4.6	3.83 V	327	65.0	4.4
2	5150.00	50.2 AV	54.0	-3.8	3.83 V	327	45.8	4.4
3	*5190.00	108.0 PK			3.81 V	347	68.5	39.5
4	*5190.00	95.3 AV			3.81 V	347	55.8	39.5
5	#10380.00	57.7 PK	68.2	-10.5	2.12 V	276	41.5	16.2
6	15570.00	-	-	-	-	-	-	-
7	20760.00	-	-	-	-	-	-	-
8	#25950.00	-	-	-	-	-	-	-
9	#31140.00	-	-	-	-	-	-	-
10	#36330.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

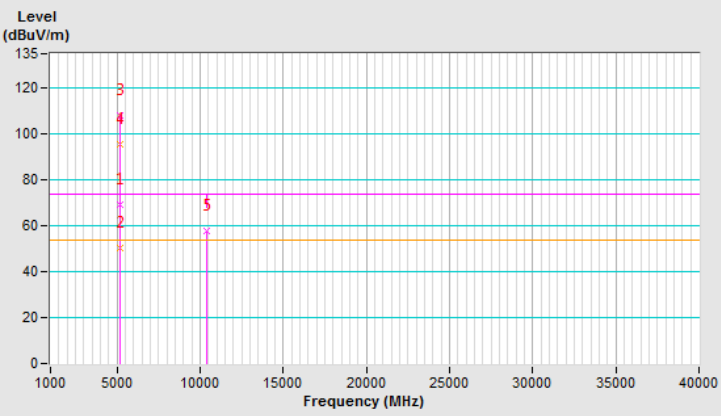


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA-MIMO
基 本 波 頻 率 ：	CH 46：5230 MHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=3kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 05 月 28 日	測 試 者 ：	鄭詠璋

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	66.6 PK	74.0	-7.4	1.88 H	296	62.2	4.4
2	5150.00	52.9 AV	54.0	-1.1	1.88 H	296	48.5	4.4
3	*5230.00	112.6 PK			1.92 H	298	73.3	39.3
4	*5230.00	100.4 AV			1.92 H	298	61.1	39.3
5	5350.00	57.6 PK	74.0	-16.4	1.92 H	292	53.3	4.3
6	5350.00	45.6 AV	54.0	-8.4	1.92 H	292	41.3	4.3
7	#10460.00	57.7 PK	68.2	-10.5	1.89 H	253	40.9	16.8
8	15690.00	-	-	-	-	-	-	-
9	20920.00	-	-	-	-	-	-	-
10	#26150.00	-	-	-	-	-	-	-
11	31380.00	-	-	-	-	-	-	-
12	#36610.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

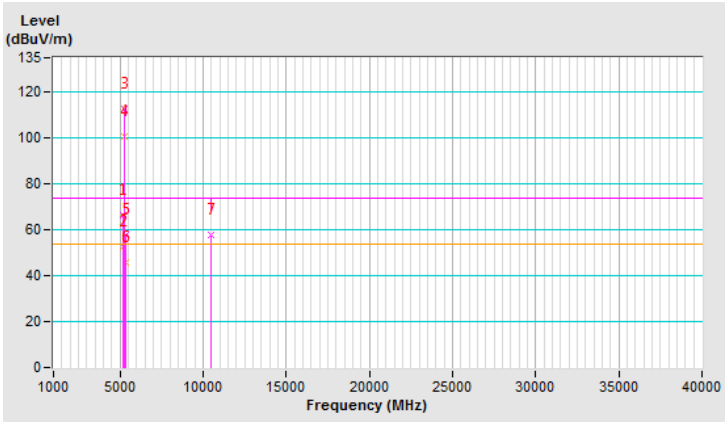


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA-MIMO
基 本 波 頻 率 ：	CH 46：5230 MHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=3kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 05 月 28 日	測 試 者 ：	鄭詠璋

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	63.4 PK	74.0	-10.6	3.65 V	318	59.0	4.4
2	5150.00	49.2 AV	54.0	-4.8	3.65 V	318	44.8	4.4
3	*5230.00	111.3 PK			3.96 V	356	72.0	39.3
4	*5230.00	98.8 AV			3.96 V	356	59.5	39.3
5	5350.00	57.2 PK	74.0	-16.8	3.72 V	354	52.9	4.3
6	5350.00	44.4 AV	54.0	-9.6	3.72 V	354	40.1	4.3
7	#10460.00	58.4 PK	68.2	-9.8	2.13 V	262	41.6	16.8
8	15690.00	-	-	-	-	-	-	-
9	20920.00	-	-	-	-	-	-	-
10	#26150.00	-	-	-	-	-	-	-
11	31380.00	-	-	-	-	-	-	-
12	#36610.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

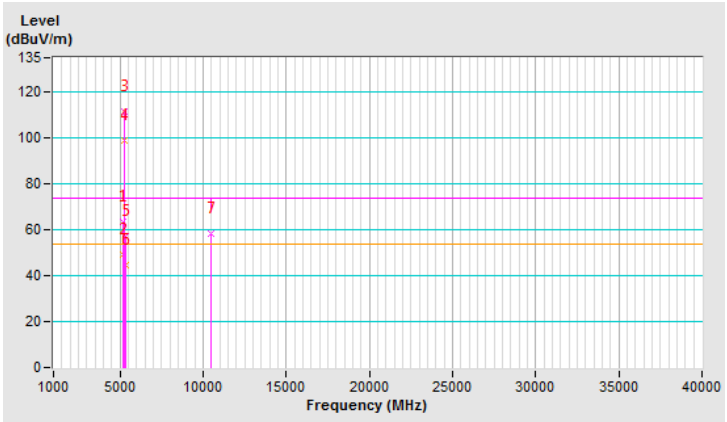


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA-MIMO
基 本 波 頻 率 ：	CH 151：5755 MHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=3kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 05 月 28 日	測 試 者 ：	鄭詠璋

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5650.00	64.9 PK	68.2	-3.3	1.72 H	27	60.4	4.5
2	*5755.00	111.7 PK			1.86 H	21	71.6	40.1
3	*5755.00	100.9 AV			1.86 H	21	60.8	40.1
4	11510.00	59.4 PK	74.0	-14.6	2.18 H	196	41.3	18.1
5	11510.00	46.5 AV	54.0	-7.5	2.18 H	196	28.4	18.1
6	#17265.00	-	-	-	-	-	-	-
7	23020.00	-	-	-	-	-	-	-
8	#28775.00	-	-	-	-	-	-	-
9	#34530.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

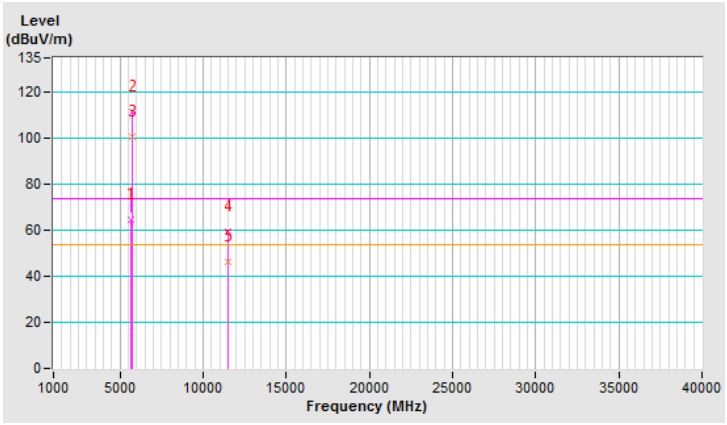


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA-MIMO
基 本 波 頻 率 ：	CH 151：5755 MHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=3kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 05 月 28 日	測 試 者 ：	鄭詠璋

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5650.00	64.4 PK	68.2	-3.8	3.00 V	310	59.9	4.5
2	*5755.00	113.2 PK			3.36 V	355	73.1	40.1
3	*5755.00	101.5 AV			3.36 V	355	61.4	40.1
4	11510.00	59.6 PK	74.0	-14.4	2.31 V	192	41.5	18.1
5	11510.00	47.9 AV	54.0	-6.1	2.31 V	192	29.8	18.1
6	#17265.00	-	-	-	-	-	-	-
7	23020.00	-	-	-	-	-	-	-
8	#28775.00	-	-	-	-	-	-	-
9	#34530.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

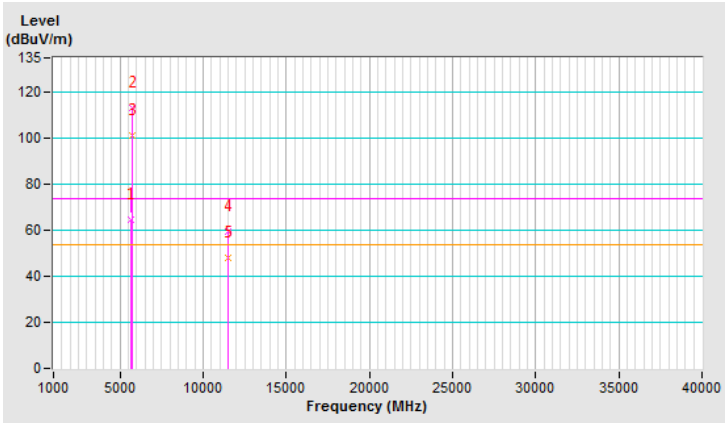


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA-MIMO
基 本 波 頻 率 ：	CH 151：5755 MHz (OOBE)	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=3kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 05 月 28 日	測 試 者 ：	鄭詠璋

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5649.36	63.2 PK	68.2	-5.0	1.86 H	21	58.7	4.5
2	#5936.54	58.4 PK	68.2	-9.8	1.86 H	21	53.1	5.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

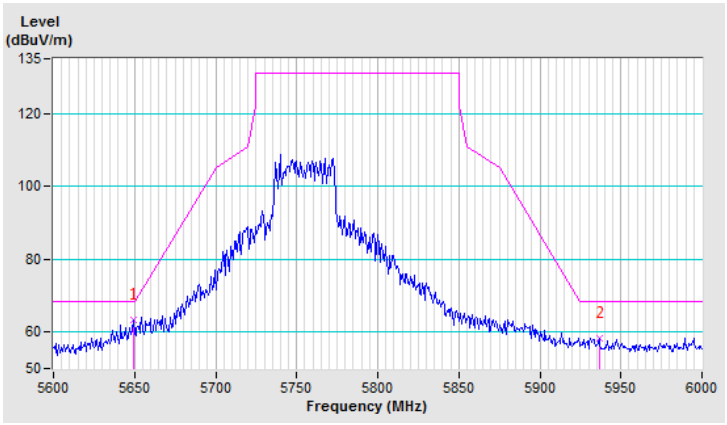


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA-MIMO
基 本 波 頻 率 ：	CH 151：5755 MHz (OOBE)	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=3kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 05 月 28 日	測 試 者 ：	鄭詠璋

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5644.87	63.7 PK	68.2	-4.5	3.36 V	355	59.2	4.5
2	#5933.33	59.7 PK	68.2	-8.5	3.36 V	355	54.4	5.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

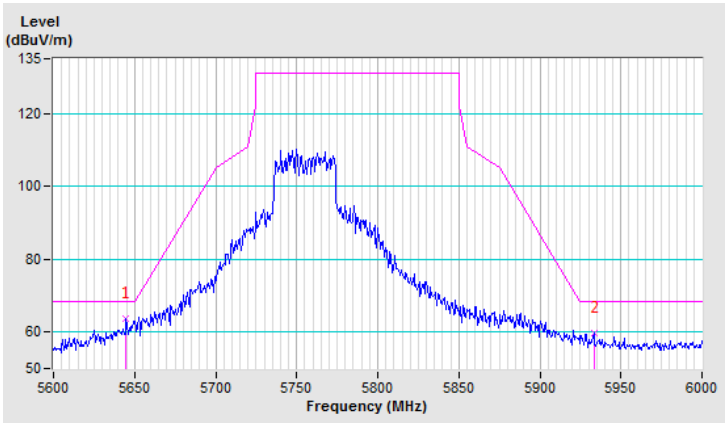


操作模式：	發射	調變技術：	OFDMA-MIMO
基本波頻率：	CH 159：5795 MHz	測試儀器：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=3kHz
量測場地溫度：	25℃	量測場地濕度：	70%RH
測試日期：	108 年 05 月 28 日	測試者：	鄭詠璋

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5795.00	114.0 PK			1.77 H	31	73.6	40.4
2	*5795.00	102.3 AV			1.77 H	31	61.9	40.4
3	#5925.00	67.2 PK	68.2	-1.0	1.63 H	27	61.9	5.3
4	11590.00	59.4 PK	74.0	-14.6	2.26 H	218	41.8	17.6
5	11590.00	46.1 AV	54.0	-7.9	2.26 H	218	28.5	17.6
6	#17385.00	-	-	-	-	-	-	-
7	#23180.00	-	-	-	-	-	-	-
8	#28975.00	-	-	-	-	-	-	-
9	#34770.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

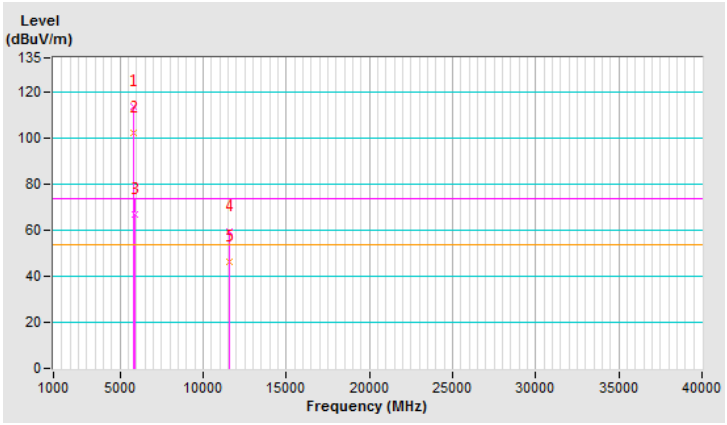


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA-MIMO
基 本 波 頻 率 ：	CH 159：5795 MHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=3kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 05 月 28 日	測 試 者 ：	鄭詠璋

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5795.00	114.5 PK			3.32 V	355	74.1	40.4
2	*5795.00	102.2 AV			3.32 V	355	61.8	40.4
3	#5925.00	65.6 PK	68.2	-2.6	3.78 V	315	60.3	5.3
4	11590.00	59.9 PK	74.0	-14.1	2.43 V	269	42.3	17.6
5	11590.00	47.0 AV	54.0	-7.0	2.43 V	269	29.4	17.6
6	#17385.00	-	-	-	-	-	-	-
7	#23180.00	-	-	-	-	-	-	-
8	#28975.00	-	-	-	-	-	-	-
9	#34770.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

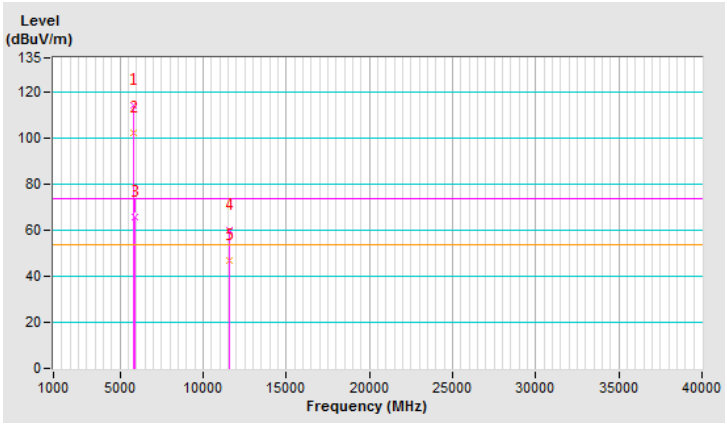


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA-MIMO
基 本 波 頻 率 ：	CH 159：5795 MHz (OOBE)	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=3kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 05 月 28 日	測 試 者 ：	鄭詠璋

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5646.15	57.0 PK	68.2	-11.2	1.77 H	31	52.5	4.5
2	#5936.54	64.5 PK	68.2	-3.7	1.77 H	31	59.2	5.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

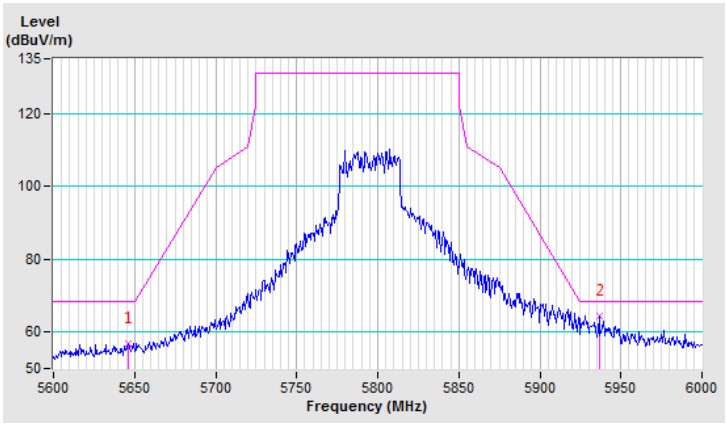


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA-MIMO
基 本 波 頻 率 ：	CH 159：5795 MHz (OOBE)	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=3kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 05 月 28 日	測 試 者 ：	鄭詠璋

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5644.87	56.1 PK	68.2	-12.1	3.32 V	355	51.6	4.5
2	#5926.92	63.3 PK	68.2	-4.9	3.32 V	355	58.0	5.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

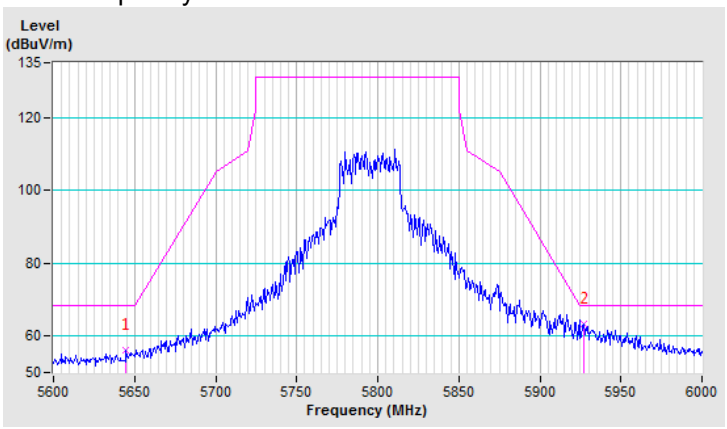


802.11ax (HE80)

操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA-MIMO
基 本 波 頻 率 ：	CH 42：5210 MHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=3kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 05 月 28 日	測 試 者 ：	鄭詠璋

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	70.3 PK	74.0	-3.7	1.82 H	293	65.9	4.4
2	5150.00	52.5 AV	54.0	-1.5	1.82 H	293	48.1	4.4
3	*5210.00	105.1 PK			2.02 H	294	65.7	39.4
4	*5210.00	93.3 AV			2.02 H	294	53.9	39.4
5	5350.00	56.9 PK	74.0	-17.1	1.96 H	310	52.6	4.3
6	5350.00	44.3 AV	54.0	-9.7	1.96 H	310	40.0	4.3
7	#10420.00	57.5 PK	68.2	-10.7	2.56 H	203	41.0	16.5
8	15630.00	-	-	-	-	-	-	-
9	20840.00	-	-	-	-	-	-	-
10	#26050.00	-	-	-	-	-	-	-
11	31260.00	-	-	-	-	-	-	-
12	36470.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

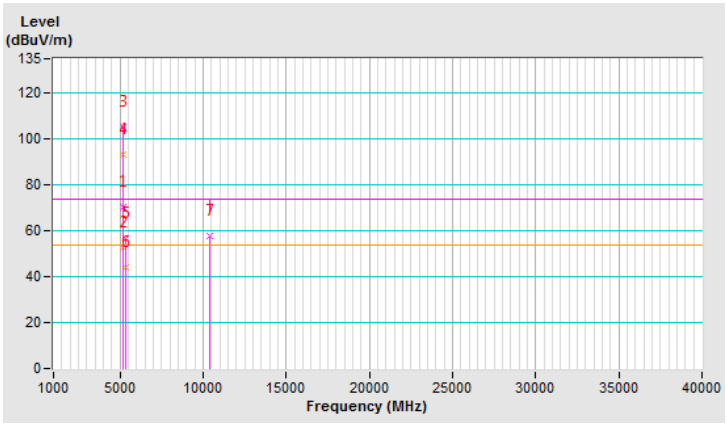


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA-MIMO
基 本 波 頻 率 ：	CH 42：5210 MHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=3kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 05 月 28 日	測 試 者 ：	鄭詠璋

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	67.5 PK	74.0	-6.5	3.69 V	2	63.1	4.4
2	5150.00	50.1 AV	54.0	-3.9	3.69 V	2	45.7	4.4
3	*5210.00	103.0 PK			3.95 V	2	63.6	39.4
4	*5210.00	92.1 AV			3.95 V	2	52.7	39.4
5	5350.00	56.8 PK	74.0	-17.2	3.58 V	11	52.5	4.3
6	5350.00	44.0 AV	54.0	-10.0	3.58 V	11	39.7	4.3
7	#10420.00	58.2 PK	68.2	-10.0	1.55 V	174	41.7	16.5
8	15630.00	-	-	-	-	-	-	-
9	20840.00	-	-	-	-	-	-	-
10	#26050.00	-	-	-	-	-	-	-
11	31260.00	-	-	-	-	-	-	-
12	36470.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

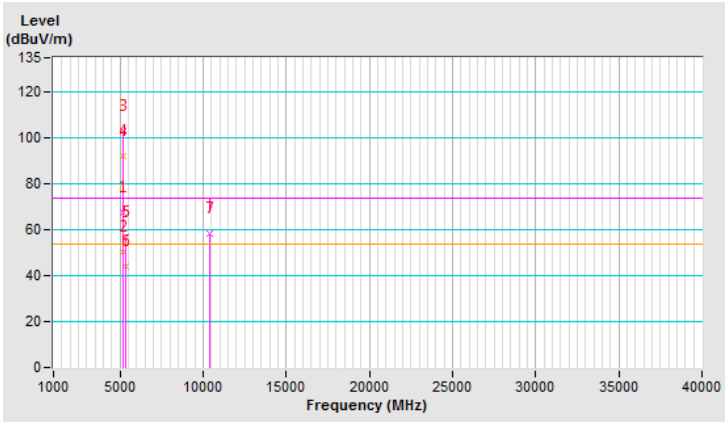


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA-MIMO
基 本 波 頻 率 ：	CH 155：5775 MHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=3kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 05 月 28 日	測 試 者 ：	鄭詠璋

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5650.00	62.8 PK	68.2	-5.4	1.60 H	25	58.3	4.5
2	*5775.00	106.2 PK			1.80 H	32	65.9	40.3
3	*5775.00	95.2 AV			1.80 H	32	54.9	40.3
4	#5925.00	65.2 PK	68.2	-3.0	1.42 H	27	59.9	5.3
5	11550.00	59.2 PK	74.0	-14.8	2.13 H	119	41.3	17.9
6	11550.00	46.4 AV	54.0	-7.6	2.13 H	119	28.5	17.9
7	#17325.00	-	-	-	-	-	-	-
8	23100.00	-	-	-	-	-	-	-
9	#28875.00	-	-	-	-	-	-	-
10	#34650.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

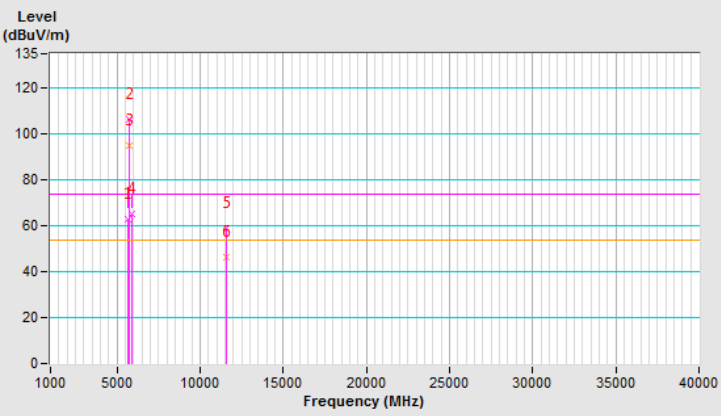


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA-MIMO
基 本 波 頻 率 ：	CH 155：5775 MHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=3kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 05 月 28 日	測 試 者 ：	鄭詠璋

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5650.00	61.4 PK	68.2	-6.8	3.54 V	319	56.9	4.5
2	*5775.00	106.8 PK			4.00 V	357	66.5	40.3
3	*5775.00	95.4 AV			4.00 V	357	55.1	40.3
4	#5925.00	63.9 PK	68.2	-4.3	3.87 V	344	58.6	5.3
5	11550.00	59.4 PK	74.0	-14.6	1.76 V	143	41.5	17.9
6	11550.00	47.1 AV	54.0	-6.9	1.76 V	143	29.2	17.9
7	#17325.00	-	-	-	-	-	-	-
8	23100.00	-	-	-	-	-	-	-
9	#28875.00	-	-	-	-	-	-	-
10	#34650.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

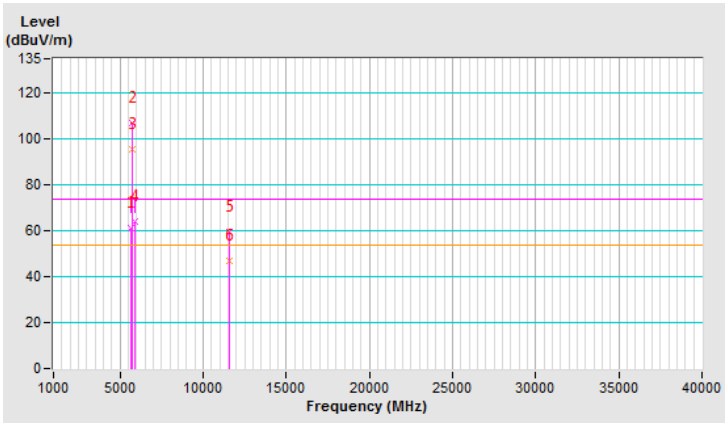


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA-MIMO
基 本 波 頻 率 ：	CH 155：5775 MHz (OOBE)	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=3kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 05 月 28 日	測 試 者 ：	鄭詠璋

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5627.56	59.0 PK	68.2	-9.2	1.80 H	32	54.5	4.5
2	#5951.92	62.3 PK	68.2	-5.9	1.80 H	32	57.0	5.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

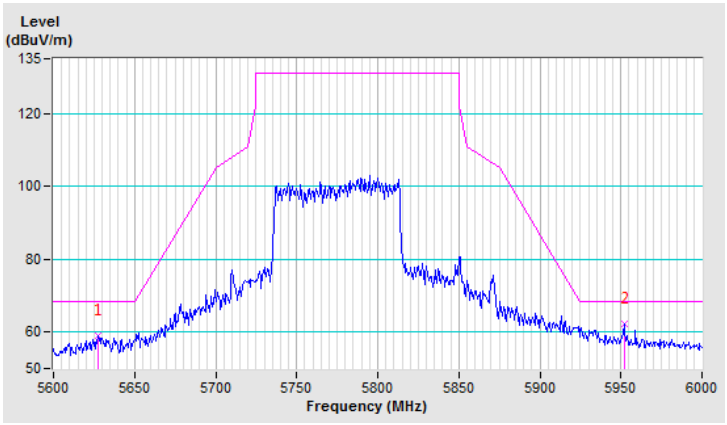


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA-MIMO
基 本 波 頻 率 ：	CH 155：5775 MHz (OOBE)	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=3kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 05 月 28 日	測 試 者 ：	鄭詠璋

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5647.44	59.9 PK	68.2	-8.3	4.00 V	357	55.4	4.5
2	#5932.05	60.4 PK	68.2	-7.8	4.00 V	357	55.1	5.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

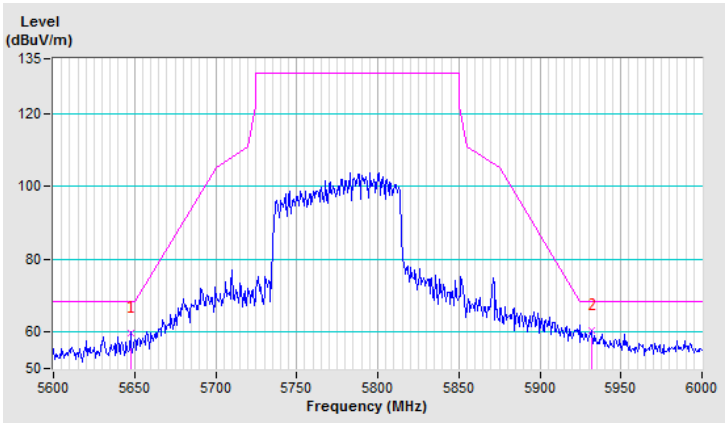

3TX


802.11a

操 作 模 式 ：	發射	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 36：5180 MHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	24℃	量 測 場 地 濕 度 ：	69%RH
測 試 日 期 ：	108 年 05 月 20 日	測 試 者 ：	鄭詠璋

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	71.0 PK	74.0	-3.0	1.85 H	297	66.6	4.4
2	5150.00	52.6 AV	54.0	-1.4	1.85 H	297	48.2	4.4
3	*5180.00	113.1 PK			1.20 H	303	73.6	39.5
4	*5180.00	103.4 AV			1.20 H	303	63.9	39.5
5	#10360.00	57.8 PK	68.2	-10.4	2.89 H	61	41.8	16.0
6	15540.00	-	-	-	-	-	-	-
7	20720.00	-	-	-	-	-	-	-
8	#25900.00	-	-	-	-	-	-	-
9	#31080.00	-	-	-	-	-	-	-
10	#36260.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

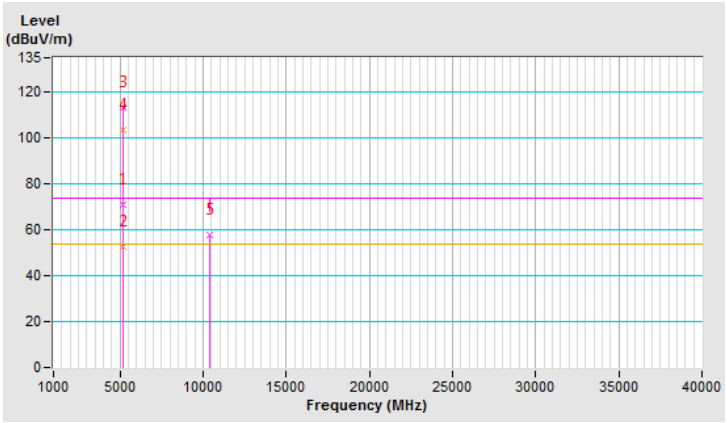


操 作 模 式 ：	發射	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 36：5180 MHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	24℃	量 測 場 地 濕 度 ：	69%RH
測 試 日 期 ：	108 年 05 月 20 日	測 試 者 ：	鄭詠璋

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	67.6 PK	74.0	-6.4	2.90 V	311	63.2	4.4
2	5150.00	48.7 AV	54.0	-5.3	2.90 V	311	44.3	4.4
3	*5180.00	111.8 PK			3.40 V	331	72.3	39.5
4	*5180.00	102.2 AV			3.40 V	331	62.7	39.5
5	#10360.00	57.4 PK	68.2	-10.8	2.48 V	195	41.4	16.0
6	15540.00	-	-	-	-	-	-	-
7	20720.00	-	-	-	-	-	-	-
8	#25900.00	-	-	-	-	-	-	-
9	#31080.00	-	-	-	-	-	-	-
10	#36260.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

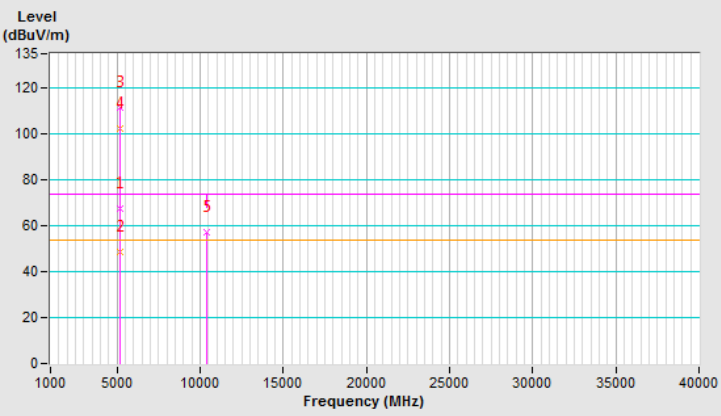


操 作 模 式 ：	發射	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 40：5200 MHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	24℃	量 測 場 地 濕 度 ：	69%RH
測 試 日 期 ：	108 年 05 月 20 日	測 試 者 ：	鄭詠璋

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5200.00	114.4 PK			1.17 H	306	74.9	39.5
2	*5200.00	104.9 AV			1.17 H	306	65.4	39.5
3	#10400.00	57.5 PK	68.2	-10.7	2.48 H	161	41.3	16.2
4	15600.00	-	-	-	-	-	-	-
5	20800.00	-	-	-	-	-	-	-
6	#26000.00	-	-	-	-	-	-	-
7	31200.00	-	-	-	-	-	-	-
8	#36400.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

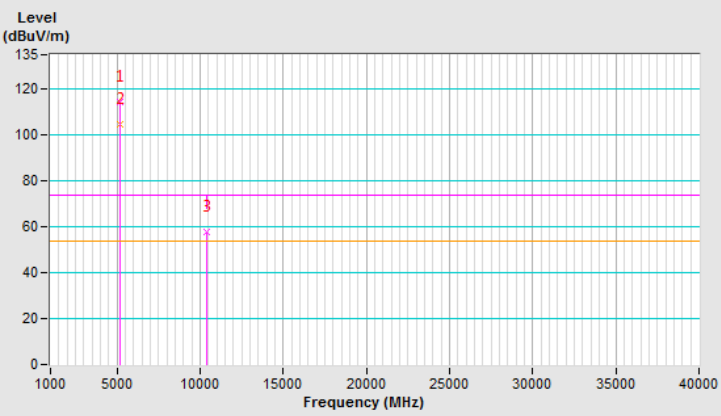


操 作 模 式 ：	發射	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 40：5200 MHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	24℃	量 測 場 地 濕 度 ：	69%RH
測 試 日 期 ：	108 年 05 月 20 日	測 試 者 ：	鄭詠璋

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5200.00	107.7 PK			1.67 V	62	68.2	39.5
2	*5200.00	98.3 AV			1.67 V	62	58.8	39.5
3	#10400.00	58.4 PK	68.2	-9.8	2.36 V	185	42.2	16.2
4	15600.00	-	-	-	-	-	-	-
5	20800.00	-	-	-	-	-	-	-
6	#26000.00	-	-	-	-	-	-	-
7	31200.00	-	-	-	-	-	-	-
8	#36400.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

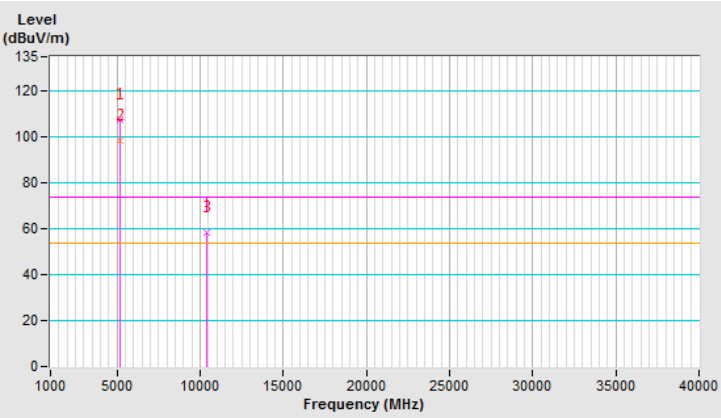


操 作 模 式 ：	發射	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 48：5240 MHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	24℃	量 測 場 地 濕 度 ：	69%RH
測 試 日 期 ：	108 年 05 月 20 日	測 試 者 ：	鄭詠璋

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5240.00	114.1 PK			1.29 H	306	74.8	39.3
2	*5240.00	104.6 AV			1.29 H	306	65.3	39.3
3	5350.00	55.9 PK	74.0	-18.1	2.52 H	357	51.6	4.3
4	5350.00	44.5 AV	54.0	-9.5	2.52 H	357	40.2	4.3
5	#10480.00	58.9 PK	68.2	-9.3	2.56 H	148	41.9	17.0
6	15720.00	-	-	-	-	-	-	-
7	20960.00	-	-	-	-	-	-	-
8	#26200.00	-	-	-	-	-	-	-
9	31440.00	-	-	-	-	-	-	-
10	#36680.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

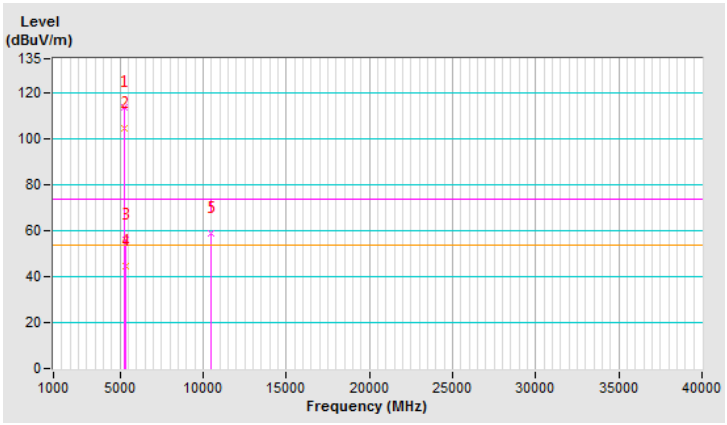


操作模式：	發射	調變技術：	OFDM
基本波頻率：	CH 48：5240 MHz	測試儀器：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量測場地溫度：	24℃	量測場地濕度：	69%RH
測試日期：	108 年 05 月 20 日	測試者：	鄭詠璋

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5240.00	114.0 PK			3.93 V	360	74.7	39.3
2	*5240.00	104.4 AV			3.93 V	360	65.1	39.3
3	5350.00	56.4 PK	74.0	-17.6	3.51 V	332	52.1	4.3
4	5350.00	44.8 AV	54.0	-9.2	3.51 V	332	40.5	4.3
5	#10480.00	58.8 PK	68.2	-9.4	2.26 V	172	41.8	17.0
6	15720.00	-	-	-	-	-	-	-
7	20960.00	-	-	-	-	-	-	-
8	#26200.00	-	-	-	-	-	-	-
9	31440.00	-	-	-	-	-	-	-
10	#36680.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

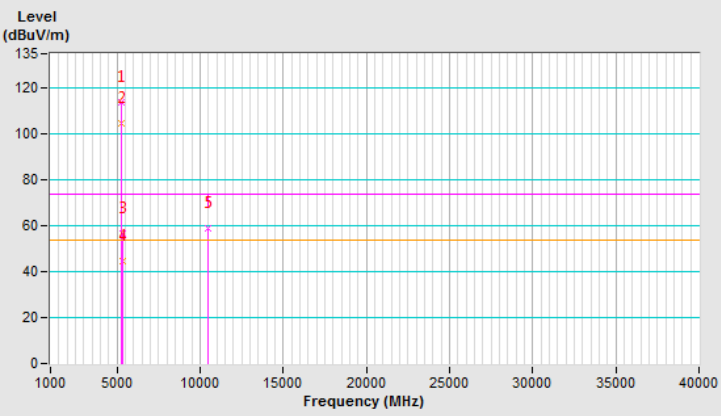


操作模式：	發射	調變技術：	OFDM
基本波頻率：	CH 149：5745 MHz	測試儀器：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量測場地溫度：	24℃	量測場地濕度：	67%RH
測試日期：	108 年 05 月 27 日	測試者：	鄭詠璋

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5745.00	117.7 PK			1.85 H	23	77.6	40.1
2	*5745.00	107.7 AV			1.85 H	23	67.6	40.1
3	11490.00	61.0 PK	74.0	-13.0	1.42 H	119	43.0	18.0
4	11490.00	47.6 AV	54.0	-6.4	1.42 H	119	29.6	18.0
5	#17235.00	63.7 PK	68.2	-4.5	1.40 H	197	42.4	21.3
6	22980.00	-	-	-	-	-	-	-
7	#28725.00	-	-	-	-	-	-	-
8	#34470.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

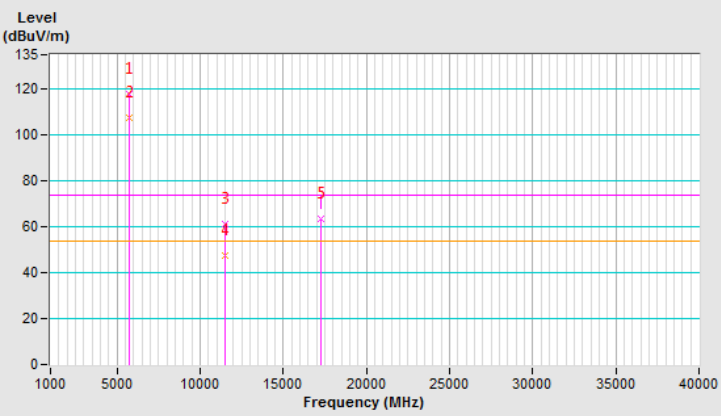


操 作 模 式 ：	發射	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 149：5745 MHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	24℃	量 測 場 地 濕 度 ：	67%RH
測 試 日 期 ：	108 年 05 月 27 日	測 試 者 ：	鄭詠璋

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5745.00	116.7 PK			3.54 V	342	76.6	40.1
2	*5745.00	106.4 AV			3.54 V	342	66.3	40.1
3	11490.00	65.1 PK	74.0	-8.9	1.27 V	90	47.1	18.0
4	11490.00	52.8 AV	54.0	-1.2	1.27 V	90	34.8	18.0
5	#17235.00	63.5 PK	68.2	-4.7	1.23 V	53	42.2	21.3
6	22980.00	-	-	-	-	-	-	-
7	#28725.00	-	-	-	-	-	-	-
8	#34470.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

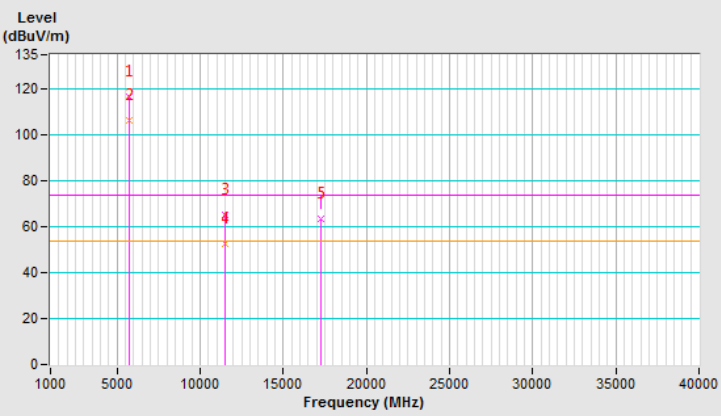


操 作 模 式 ：	發射	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 149：5745 MHz (OOBE)	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	24℃	量 測 場 地 濕 度 ：	67%RH
測 試 日 期 ：	108 年 05 月 27 日	測 試 者 ：	鄭詠璋

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5646.79	60.8 PK	68.2	-7.4	1.85 H	23	56.3	4.5
2	#5989.74	58.3 PK	68.2	-9.9	1.85 H	23	52.9	5.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

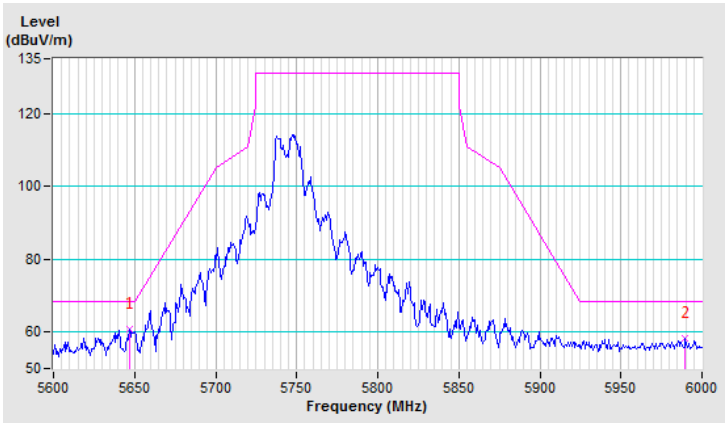


操 作 模 式 ：	發射	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 149：5745 MHz (OOBE)	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	24℃	量 測 場 地 濕 度 ：	67%RH
測 試 日 期 ：	108 年 05 月 27 日	測 試 者 ：	鄭詠璋

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5609.62	55.6 PK	68.2	-12.6	3.54 V	342	51.0	4.6
2	#5982.69	57.4 PK	68.2	-10.8	3.54 V	342	52.0	5.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

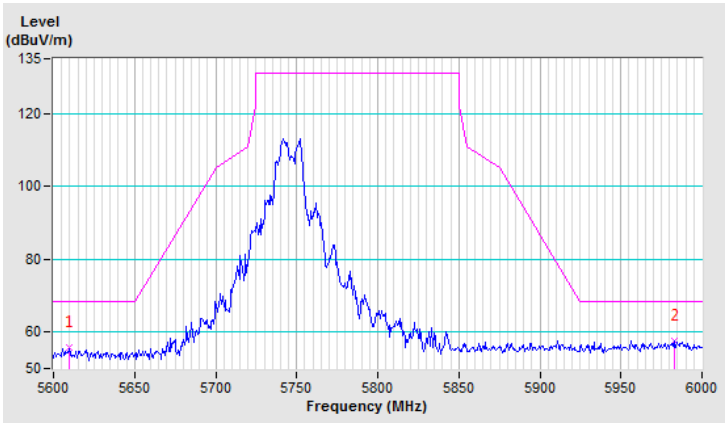


操 作 模 式 ：	發射	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 157：5785 MHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	24℃	量 測 場 地 濕 度 ：	67%RH
測 試 日 期 ：	108 年 05 月 27 日	測 試 者 ：	鄭詠璋

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5785.00	118.0 PK			1.92 H	37	77.7	40.3
2	*5785.00	107.5 AV			1.92 H	37	67.2	40.3
3	11570.00	60.8 PK	74.0	-13.2	3.28 H	294	43.1	17.7
4	11570.00	46.9 AV	54.0	-7.1	3.28 H	294	29.2	17.7
5	#17355.00	64.2 PK	68.2	-4.0	3.80 H	350	42.0	22.2
6	#23140.00	-	-	-	-	-	-	-
7	#28925.00	-	-	-	-	-	-	-
8	#34710.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

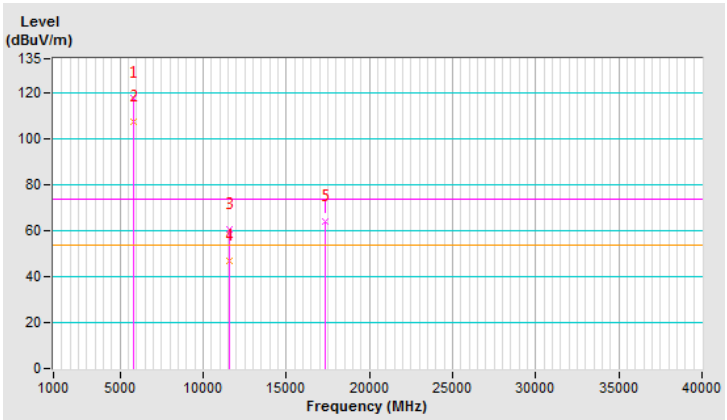


操 作 模 式 ：	發射	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 157：5785 MHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	24℃	量 測 場 地 濕 度 ：	67%RH
測 試 日 期 ：	108 年 05 月 27 日	測 試 者 ：	鄭詠璋

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5785.00	118.8 PK			3.82 V	348	78.5	40.3
2	*5785.00	108.0 AV			3.82 V	348	67.7	40.3
3	11570.00	64.1 PK	74.0	-9.9	1.29 V	33	46.4	17.7
4	11570.00	51.6 AV	54.0	-2.4	1.29 V	33	33.9	17.7
5	#17355.00	65.2 PK	68.2	-3.0	1.51 V	48	43.0	22.2
6	#23140.00	-	-	-	-	-	-	-
7	#28925.00	-	-	-	-	-	-	-
8	#34710.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

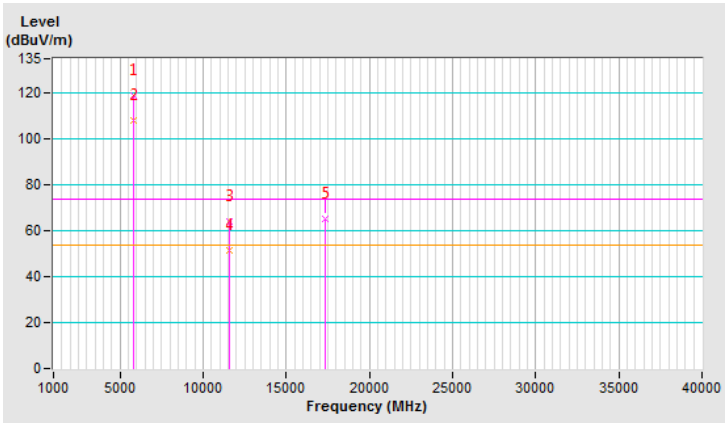


操 作 模 式 ：	發射	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 157：5785 MHz (OOBE)	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	24℃	量 測 場 地 濕 度 ：	67%RH
測 試 日 期 ：	108 年 05 月 27 日	測 試 者 ：	鄭詠璋

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5614.10	55.4 PK	68.2	-12.8	1.92 H	37	50.8	4.6
2	#5979.49	58.5 PK	68.2	-9.7	1.92 H	37	53.1	5.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

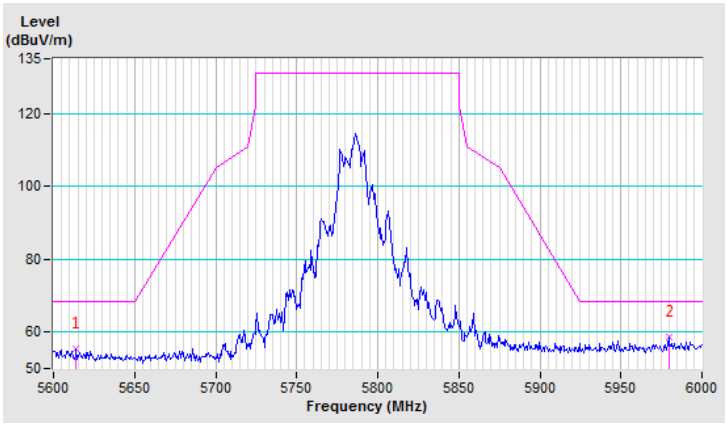


操 作 模 式 ：	發射	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 157：5785 MHz (OOBE)	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	24℃	量 測 場 地 濕 度 ：	67%RH
測 試 日 期 ：	108 年 05 月 27 日	測 試 者 ：	鄭詠璋

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5603.21	54.9 PK	68.2	-13.3	3.82 V	348	50.3	4.6
2	#5993.59	57.6 PK	68.2	-10.6	3.82 V	348	52.2	5.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

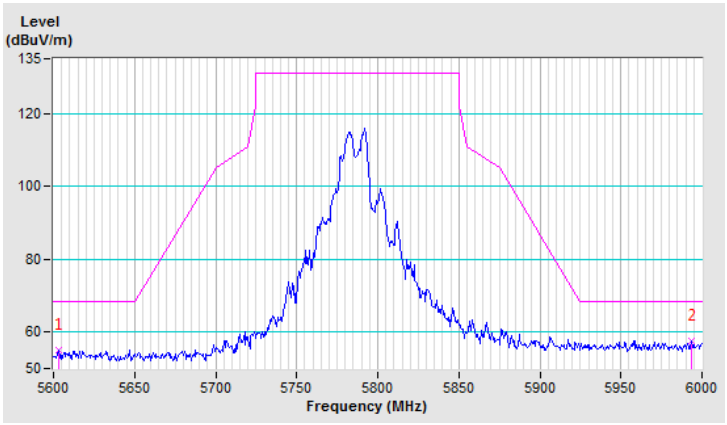


操 作 模 式 ：	發射	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 165：5825 MHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	24℃	量 測 場 地 濕 度 ：	67%RH
測 試 日 期 ：	108 年 05 月 27 日	測 試 者 ：	鄭詠璋

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5825.00	116.9 PK			2.14 H	30	76.5	40.4
2	*5825.00	107.5 AV			2.14 H	30	67.1	40.4
3	11650.00	62.3 PK	74.0	-11.7	3.76 H	356	44.8	17.5
4	11650.00	48.9 AV	54.0	-5.1	3.76 H	356	31.4	17.5
5	#17475.00	65.0 PK	68.2	-3.2	3.77 H	350	41.3	23.7
6	#23300.00	-	-	-	-	-	-	-
7	#29125.00	-	-	-	-	-	-	-
8	#34950.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

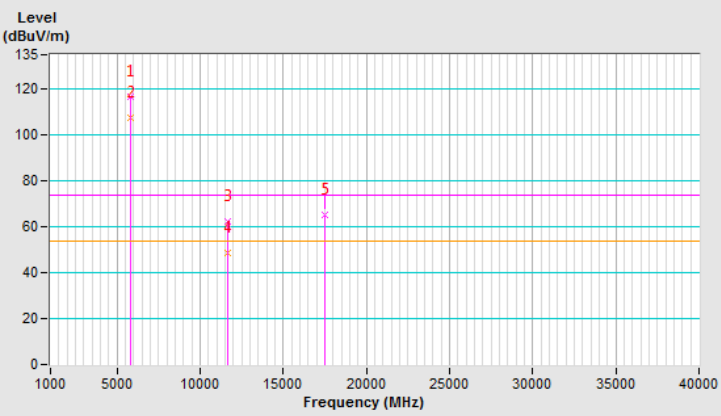


操 作 模 式 ：	發射	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 165：5825 MHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	24℃	量 測 場 地 濕 度 ：	67%RH
測 試 日 期 ：	108 年 05 月 27 日	測 試 者 ：	鄭詠璋

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5825.00	117.4 PK			3.74 V	338	77.0	40.4
2	*5825.00	107.3 AV			3.74 V	338	66.9	40.4
3	11650.00	64.7 PK	74.0	-9.3	2.22 V	45	47.2	17.5
4	11650.00	51.8 AV	54.0	-2.2	2.22 V	45	34.3	17.5
5	#17475.00	67.1 PK	68.2	-1.1	2.06 V	57	43.4	23.7
6	#23300.00	-	-	-	-	-	-	-
7	#29125.00	-	-	-	-	-	-	-
8	#34950.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

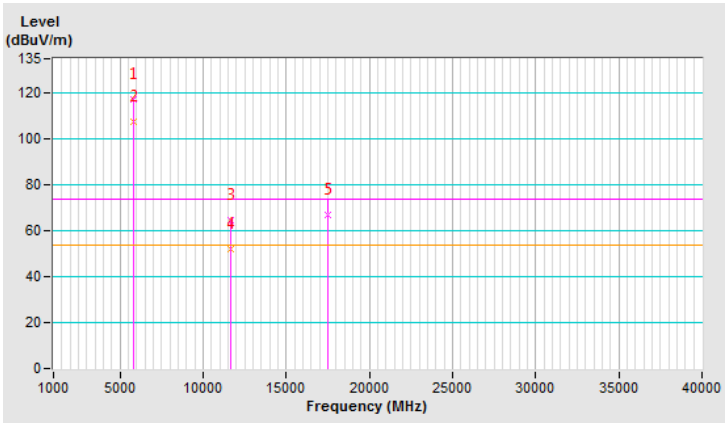


操 作 模 式 ：	發射	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 165：5825 MHz (OOBE)	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	24℃	量 測 場 地 濕 度 ：	67%RH
測 試 日 期 ：	108 年 05 月 27 日	測 試 者 ：	鄭詠璋

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5601.28	54.8 PK	68.2	-13.4	2.14 H	30	50.2	4.6
2	#5975.64	57.7 PK	68.2	-10.5	2.14 H	30	52.3	5.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

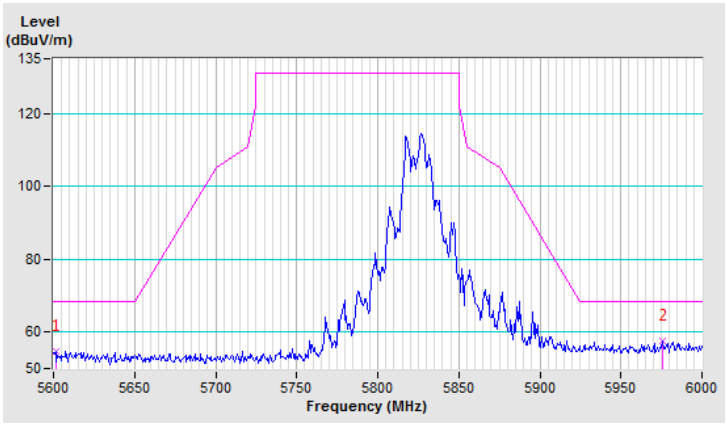


操 作 模 式 ：	發射	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 165：5825 MHz (OOBE)	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	24℃	量 測 場 地 濕 度 ：	67%RH
測 試 日 期 ：	108 年 05 月 27 日	測 試 者 ：	鄭詠璋

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5603.21	55.5 PK	68.2	-12.7	3.74 V	338	50.9	4.6
2	#5948.72	58.5 PK	68.2	-9.7	3.74 V	338	53.2	5.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

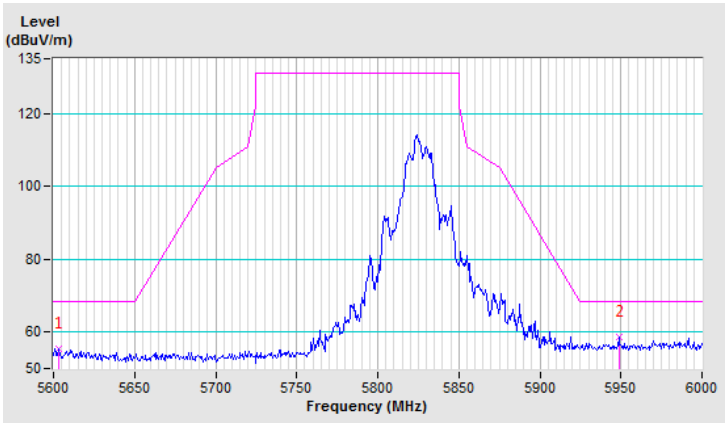


802.11ax (HE20)

操作模式：	發射	調變技術：	OFDMA-MIMO
基本波頻率：	CH 36：5180 MHz	測試儀器：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量測場地溫度：	24℃	量測場地濕度：	67%RH
測試日期：	108 年 05 月 27 日	測試者：	鄭詠璋

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	70.9 PK	74.0	-3.1	1.48 H	297	66.5	4.4
2	5150.00	52.8 AV	54.0	-1.2	1.48 H	297	48.4	4.4
3	*5180.00	113.3 PK			1.95 H	299	73.8	39.5
4	*5180.00	101.4 AV			1.95 H	299	61.9	39.5
5	#10360.00	57.4 PK	68.2	-10.8	2.48 H	259	41.4	16.0
6	15540.00	-	-	-	-	-	-	-
7	20720.00	-	-	-	-	-	-	-
8	#25900.00	-	-	-	-	-	-	-
9	#31080.00	-	-	-	-	-	-	-
10	#36260.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

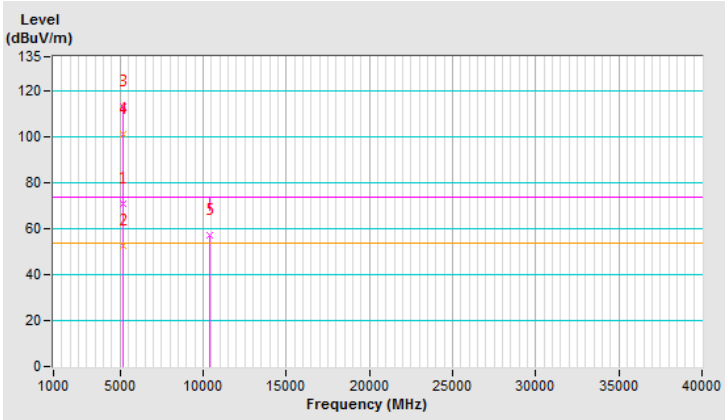


操作模式：	發射	調變技術：	OFDMA-MIMO
基本波頻率：	CH 36：5180 MHz	測試儀器：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量測場地溫度：	24℃	量測場地濕度：	67%RH
測試日期：	108 年 05 月 27 日	測試者：	鄭詠璋

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	66.5 PK	74.0	-7.5	2.76 V	351	62.1	4.4
2	5150.00	49.2 AV	54.0	-4.8	2.76 V	351	44.8	4.4
3	*5180.00	111.8 PK			2.95 V	2	72.3	39.5
4	*5180.00	99.0 AV			2.95 V	2	59.5	39.5
5	#10360.00	57.6 PK	68.2	-10.6	1.39 V	174	41.6	16.0
6	15540.00	-	-	-	-	-	-	-
7	20720.00	-	-	-	-	-	-	-
8	#25900.00	-	-	-	-	-	-	-
9	#31080.00	-	-	-	-	-	-	-
10	#36260.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

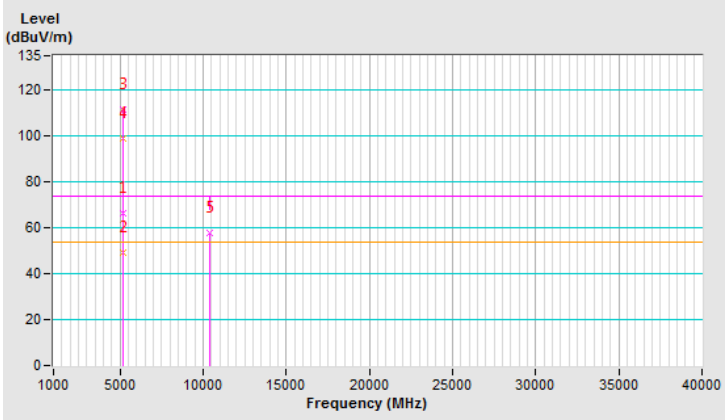


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA-MIMO
基 本 波 頻 率 ：	CH 40：5200 MHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	24℃	量 測 場 地 濕 度 ：	67%RH
測 試 日 期 ：	108 年 05 月 27 日	測 試 者 ：	鄭詠璋

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5200.00	116.2 PK			1.09 H	18	76.7	39.5
2	*5200.00	104.3 AV			1.09 H	18	64.8	39.5
3	#10400.00	57.5 PK	68.2	-10.7	2.39 H	251	41.3	16.2
4	15600.00	-	-	-	-	-	-	-
5	20800.00	-	-	-	-	-	-	-
6	#26000.00	-	-	-	-	-	-	-
7	31200.00	-	-	-	-	-	-	-
8	#36400.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

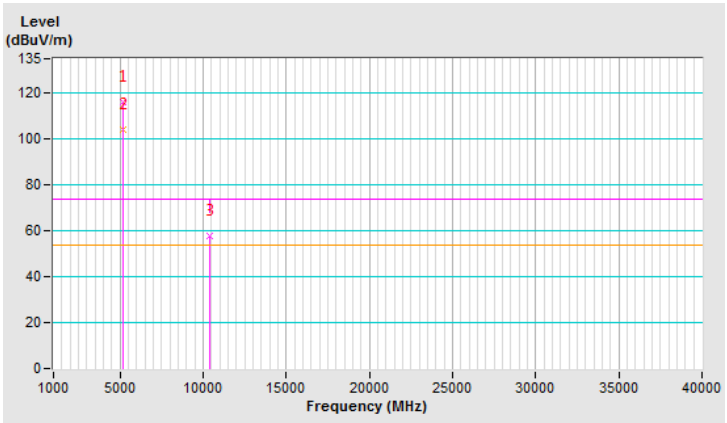


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA-MIMO
基 本 波 頻 率 ：	CH 40：5200 MHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	24℃	量 測 場 地 濕 度 ：	67%RH
測 試 日 期 ：	108 年 05 月 27 日	測 試 者 ：	鄭詠璋

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5200.00	115.0 PK			3.41 V	332	75.5	39.5
2	*5200.00	102.1 AV			3.41 V	332	62.6	39.5
3	#10400.00	57.6 PK	68.2	-10.6	1.51 V	164	41.4	16.2
4	15600.00	-	-	-	-	-	-	-
5	20800.00	-	-	-	-	-	-	-
6	#26000.00	-	-	-	-	-	-	-
7	31200.00	-	-	-	-	-	-	-
8	#36400.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

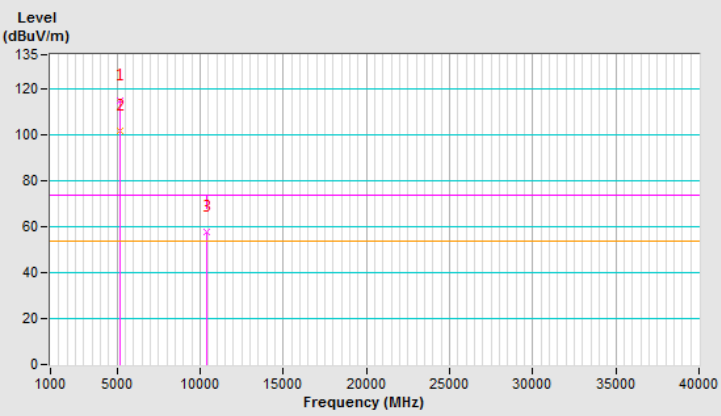


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA-MIMO
基 本 波 頻 率 ：	CH 48：5240 MHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	24℃	量 測 場 地 濕 度 ：	67%RH
測 試 日 期 ：	108 年 05 月 27 日	測 試 者 ：	鄭詠璋

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5240.00	117.4 PK			1.24 H	30	78.1	39.3
2	*5240.00	104.5 AV			1.24 H	30	65.2	39.3
3	5350.00	57.3 PK	74.0	-16.7	1.36 H	45	53.0	4.3
4	5350.00	44.0 AV	54.0	-10.0	1.36 H	45	39.7	4.3
5	#10480.00	59.2 PK	68.2	-9.0	2.36 H	202	42.2	17.0
6	15720.00	-	-	-	-	-	-	-
7	20960.00	-	-	-	-	-	-	-
8	#26200.00	-	-	-	-	-	-	-
9	31440.00	-	-	-	-	-	-	-
10	#36680.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

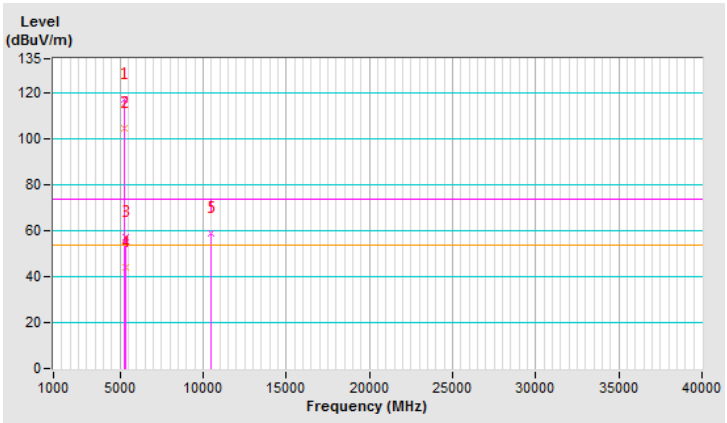


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA-MIMO
基 本 波 頻 率 ：	CH 48：5240 MHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	24℃	量 測 場 地 濕 度 ：	67%RH
測 試 日 期 ：	108 年 05 月 27 日	測 試 者 ：	鄭詠璋

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5240.00	115.3 PK			3.32 V	330	76.0	39.3
2	*5240.00	103.2 AV			3.32 V	330	63.9	39.3
3	5350.00	56.6 PK	74.0	-17.4	3.26 V	314	52.3	4.3
4	5350.00	43.9 AV	54.0	-10.1	3.26 V	314	39.6	4.3
5	#10480.00	58.9 PK	68.2	-9.3	1.48 V	139	41.9	17.0
6	15720.00	-	-	-	-	-	-	-
7	20960.00	-	-	-	-	-	-	-
8	#26200.00	-	-	-	-	-	-	-
9	31440.00	-	-	-	-	-	-	-
10	#36680.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

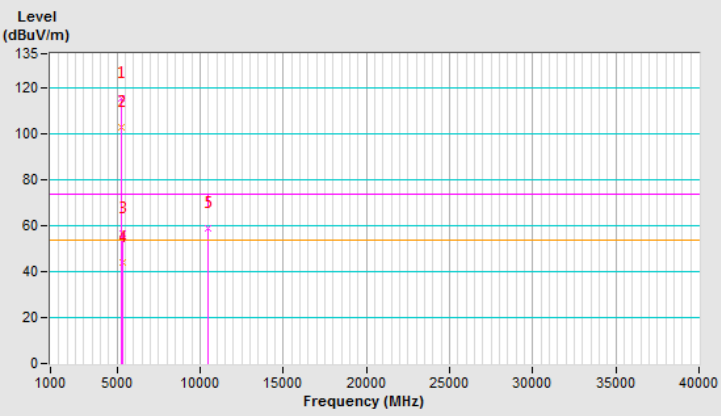


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA-MIMO
基 本 波 頻 率 ：	CH 149：5745 MHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	24℃	量 測 場 地 濕 度 ：	67%RH
測 試 日 期 ：	108 年 05 月 27 日	測 試 者 ：	鄭詠璋

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5745.00	118.1 PK			2.15 H	305	78.0	40.1
2	*5745.00	105.8 AV			2.15 H	305	65.7	40.1
3	11490.00	60.3 PK	74.0	-13.7	1.97 H	132	42.3	18.0
4	11490.00	47.2 AV	54.0	-6.8	1.97 H	132	29.2	18.0
5	#17235.00	-	-	-	-	-	-	-
6	22980.00	-	-	-	-	-	-	-
7	#28725.00	-	-	-	-	-	-	-
8	#34470.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

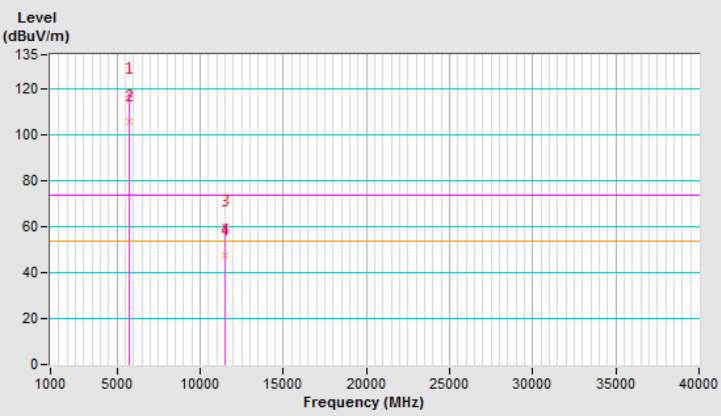


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA-MIMO
基 本 波 頻 率 ：	CH 149：5745 MHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	24℃	量 測 場 地 濕 度 ：	67%RH
測 試 日 期 ：	108 年 05 月 27 日	測 試 者 ：	鄭詠璋

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5745.00	117.1 PK			2.83 V	354	77.0	40.1
2	*5745.00	105.2 AV			2.83 V	354	65.1	40.1
3	11490.00	62.6 PK	74.0	-11.4	1.41 V	90	44.6	18.0
4	11490.00	49.8 AV	54.0	-4.2	1.41 V	90	31.8	18.0
5	#17235.00	-	-	-	-	-	-	-
6	22980.00	-	-	-	-	-	-	-
7	#28725.00	-	-	-	-	-	-	-
8	#34470.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

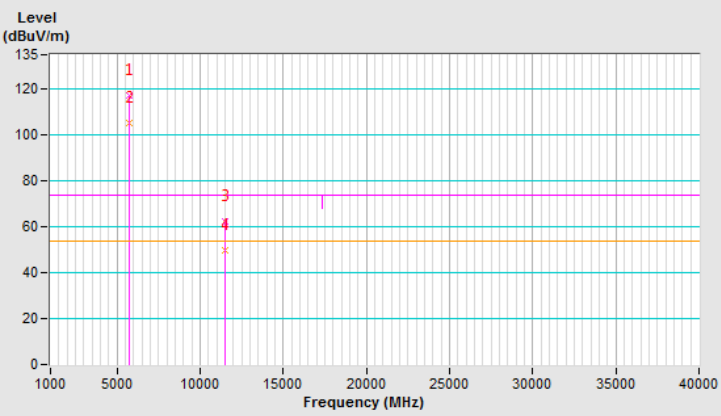


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA-MIMO
基 本 波 頻 率 ：	CH 149：5745 MHz (OOBE)	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	24℃	量 測 場 地 濕 度 ：	67%RH
測 試 日 期 ：	108 年 05 月 27 日	測 試 者 ：	鄭詠璋

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5635.26	55.9 PK	68.2	-12.3	2.15 H	305	51.4	4.5
2	#5934.62	57.4 PK	68.2	-10.8	2.15 H	305	52.1	5.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

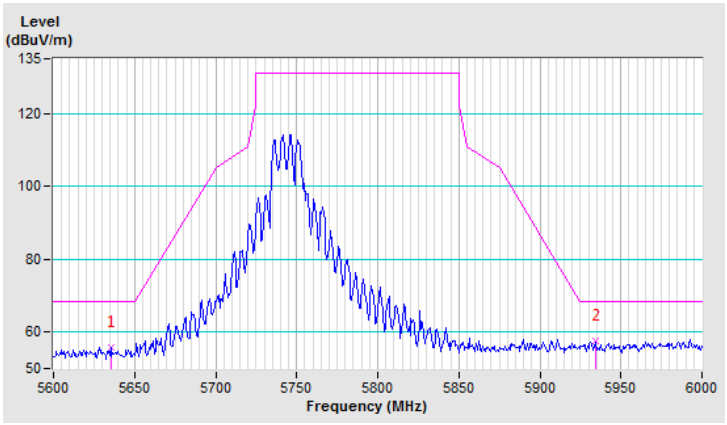


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA-MIMO
基 本 波 頻 率 ：	CH 149：5745 MHz (OOBE)	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	24℃	量 測 場 地 濕 度 ：	67%RH
測 試 日 期 ：	108 年 05 月 27 日	測 試 者 ：	鄭詠璋

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5648.08	57.3 PK	68.2	-10.9	2.83 V	354	52.8	4.5
2	#5992.95	58.5 PK	68.2	-9.7	2.83 V	354	53.1	5.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

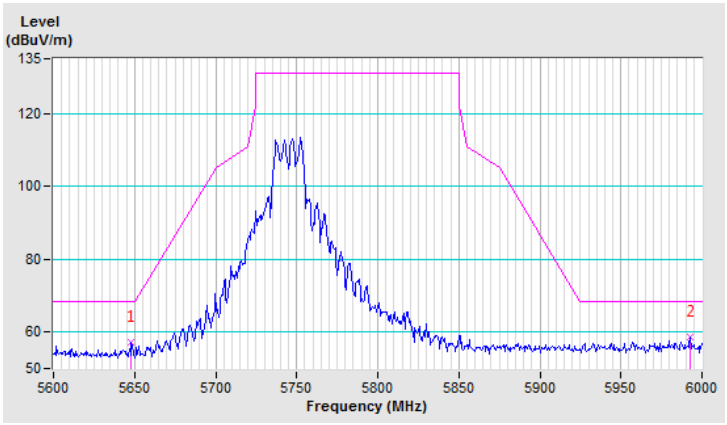


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA-MIMO
基 本 波 頻 率 ：	CH 157：5785 MHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	24℃	量 測 場 地 濕 度 ：	67%RH
測 試 日 期 ：	108 年 05 月 27 日	測 試 者 ：	鄭詠璋

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5785.00	119.6 PK			2.44 H	22	79.3	40.3
2	*5785.00	106.8 AV			2.44 H	22	66.5	40.3
3	11570.00	59.3 PK	74.0	-14.7	3.80 H	356	41.6	17.7
4	11570.00	46.0 AV	54.0	-8.0	3.80 H	356	28.3	17.7
5	#17355.00	64.7 PK	68.2	-3.5	3.80 H	350	42.5	22.2
6	#23140.00	-	-	-	-	-	-	-
7	#28925.00	-	-	-	-	-	-	-
8	#34710.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

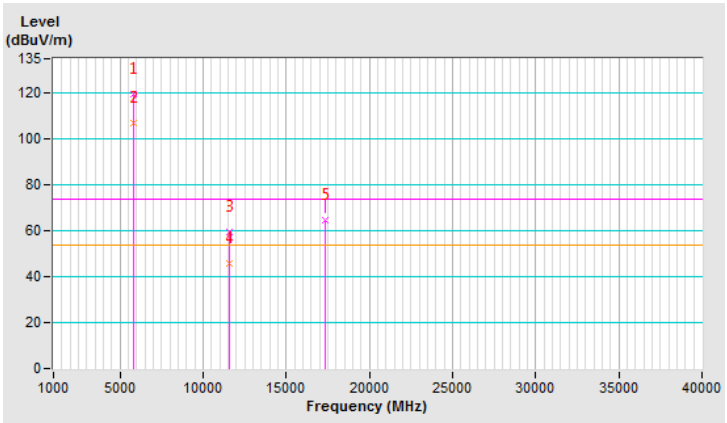


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA-MIMO
基 本 波 頻 率 ：	CH 157：5785 MHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	24℃	量 測 場 地 濕 度 ：	67%RH
測 試 日 期 ：	108 年 05 月 27 日	測 試 者 ：	鄭詠璋

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5785.00	119.0 PK			2.80 V	354	78.7	40.3
2	*5785.00	105.6 AV			2.80 V	354	65.3	40.3
3	11570.00	62.9 PK	74.0	-11.1	2.49 V	324	45.2	17.7
4	11570.00	50.2 AV	54.0	-3.8	2.49 V	324	32.5	17.7
5	#17355.00	64.2 PK	68.2	-4.0	2.61 V	26	42.0	22.2
6	#23140.00	-	-	-	-	-	-	-
7	#28925.00	-	-	-	-	-	-	-
8	#34710.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

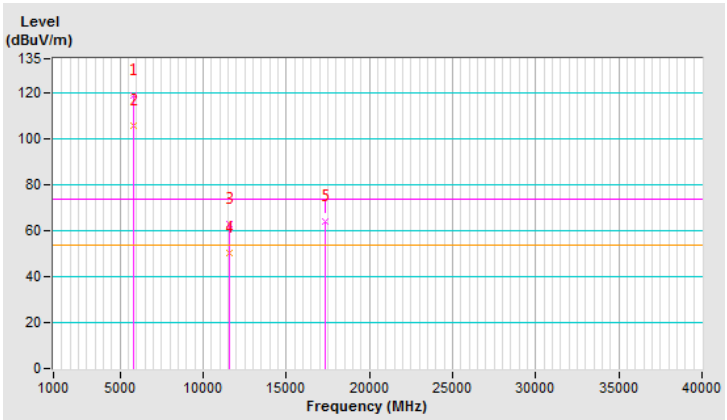


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA-MIMO
基 本 波 頻 率 ：	CH 157：5785 MHz (OOBE)	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	24℃	量 測 場 地 濕 度 ：	67%RH
測 試 日 期 ：	108 年 05 月 27 日	測 試 者 ：	鄭詠璋

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5608.33	55.1 PK	68.2	-13.1	2.44 H	22	50.5	4.6
2	#5949.36	58.0 PK	68.2	-10.2	2.44 H	22	52.7	5.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

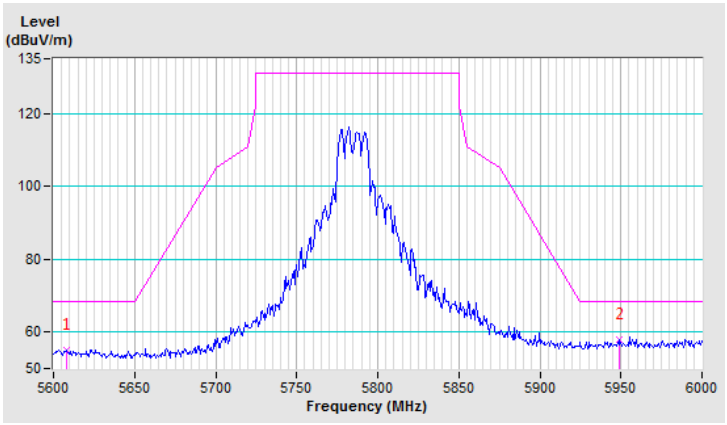


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA-MIMO
基 本 波 頻 率 ：	CH 157：5785 MHz (OOBE)	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	24℃	量 測 場 地 濕 度 ：	67%RH
測 試 日 期 ：	108 年 05 月 27 日	測 試 者 ：	鄭詠璋

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5633.33	55.2 PK	68.2	-13.0	2.80 V	354	50.7	4.5
2	#5946.79	57.7 PK	68.2	-10.5	2.80 V	354	52.4	5.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

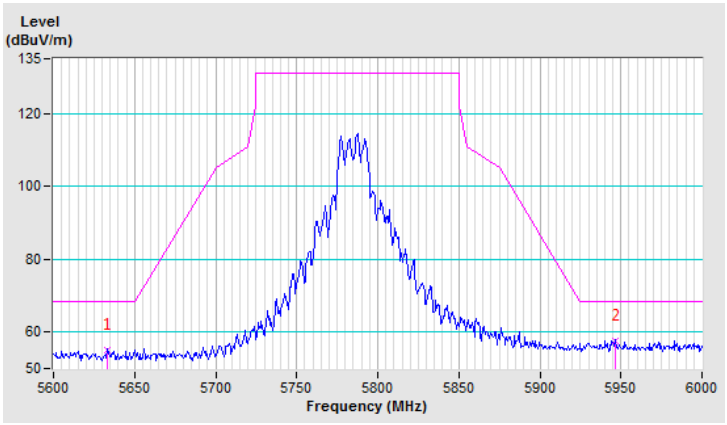


操作模式：	發射	調變技術：	OFDMA-MIMO
基本波頻率：	CH 165：5825 MHz	測試儀器：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量測場地溫度：	24℃	量測場地濕度：	67%RH
測試日期：	108 年 05 月 27 日	測試者：	鄭詠璋

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5825.00	120.3 PK			2.11 H	20	79.9	40.4
2	*5825.00	108.1 AV			2.11 H	20	67.7	40.4
3	11650.00	62.1 PK	74.0	-11.9	3.44 H	348	44.6	17.5
4	11650.00	49.3 AV	54.0	-4.7	3.44 H	348	31.8	17.5
5	#17475.00	65.9 PK	68.2	-2.3	3.60 H	357	42.2	23.7
6	#23300.00	-	-	-	-	-	-	-
7	#29125.00	-	-	-	-	-	-	-
8	#34950.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

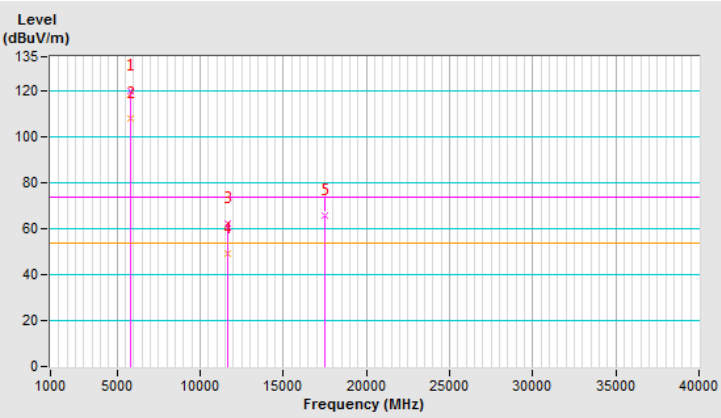


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA-MIMO
基 本 波 頻 率 ：	CH 165：5825 MHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	24℃	量 測 場 地 濕 度 ：	67%RH
測 試 日 期 ：	108 年 05 月 27 日	測 試 者 ：	鄭詠璋

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5825.00	120.0 PK			3.79 V	347	79.6	40.4
2	*5825.00	107.0 AV			3.79 V	347	66.6	40.4
3	11650.00	64.3 PK	74.0	-9.7	1.93 V	123	46.8	17.5
4	11650.00	51.2 AV	54.0	-2.8	1.93 V	123	33.7	17.5
5	#17475.00	66.9 PK	68.2	-1.3	2.10 V	41	43.2	23.7
6	#23300.00	-	-	-	-	-	-	-
7	#29125.00	-	-	-	-	-	-	-
8	#34950.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

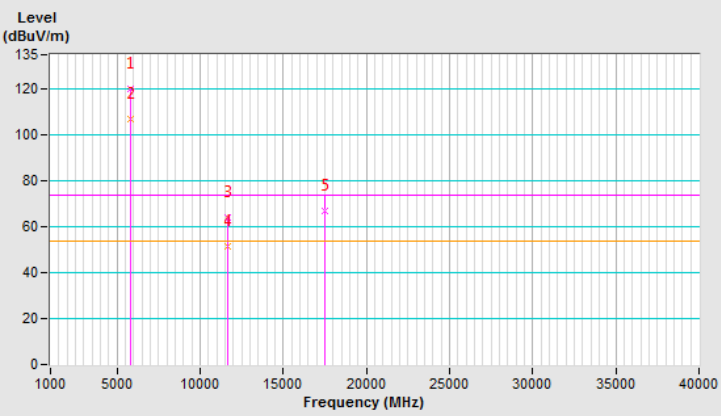


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA-MIMO
基 本 波 頻 率 ：	CH 165：5825 MHz (OOBE)	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	24℃	量 測 場 地 濕 度 ：	67%RH
測 試 日 期 ：	108 年 05 月 27 日	測 試 者 ：	鄭詠璋

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5615.38	55.3 PK	68.2	-12.9	2.11 H	20	50.7	4.6
2	#5926.92	64.7 PK	68.2	-3.5	2.11 H	20	59.4	5.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

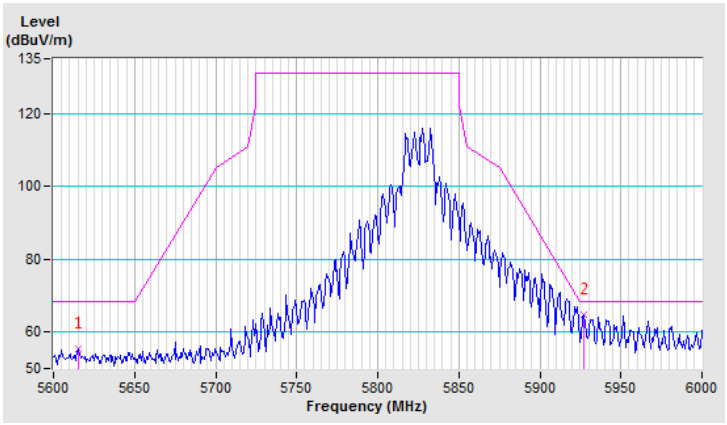


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA-MIMO
基 本 波 頻 率 ：	CH 165：5825 MHz (OOBE)	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	24℃	量 測 場 地 濕 度 ：	67%RH
測 試 日 期 ：	108 年 05 月 27 日	測 試 者 ：	鄭詠璋

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5619.87	54.8 PK	68.2	-13.4	3.79 V	347	50.2	4.6
2	#5934.62	60.6 PK	68.2	-7.6	3.79 V	347	55.3	5.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

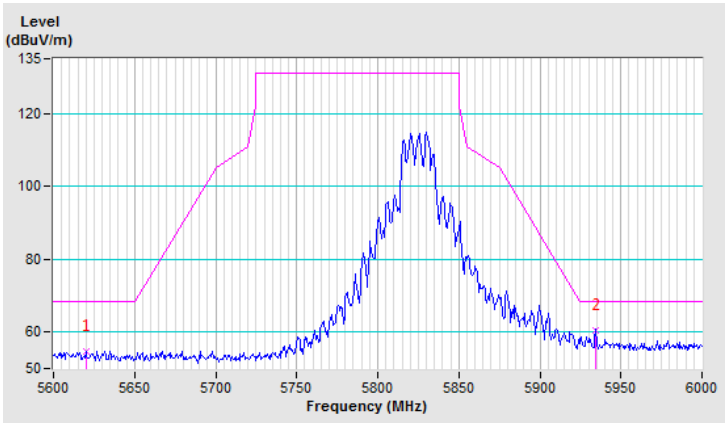


802.11ax (HE40)

操作模式：	發射	調變技術：	OFDMA-MIMO
基本波頻率：	CH 38：5190 MHz	測試儀器：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=3kHz
量測場地溫度：	24℃	量測場地濕度：	67%RH
測試日期：	108 年 05 月 27 日	測試者：	鄭詠璋

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	71.2 PK	74.0	-2.8	1.00 H	274	66.8	4.4
2	5150.00	53.0 AV	54.0	-1.0	1.00 H	274	48.6	4.4
3	*5190.00	110.3 PK			1.03 H	278	70.8	39.5
4	*5190.00	98.0 AV			1.03 H	278	58.5	39.5
5	#10380.00	57.4 PK	68.2	-10.8	2.21 H	189	41.2	16.2
6	15570.00	-	-	-	-	-	-	-
7	20760.00	-	-	-	-	-	-	-
8	#25950.00	-	-	-	-	-	-	-
9	#31140.00	-	-	-	-	-	-	-
10	#36330.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

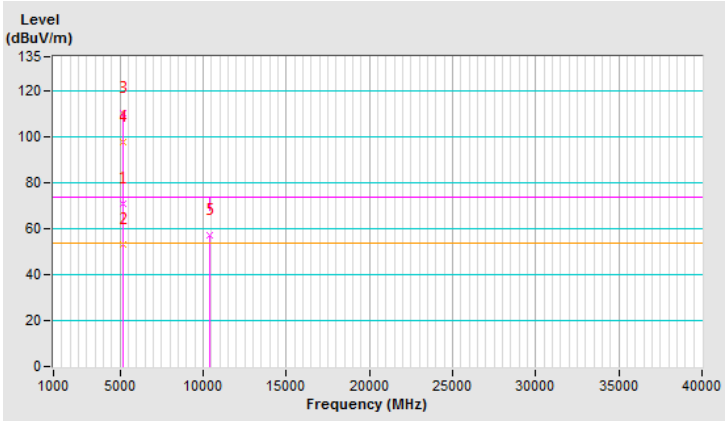


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA-MIMO
基 本 波 頻 率 ：	CH 38：5190 MHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=3kHz
量 測 場 地 溫 度 ：	24℃	量 測 場 地 濕 度 ：	67%RH
測 試 日 期 ：	108 年 05 月 27 日	測 試 者 ：	鄭詠璋

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	66.9 PK	74.0	-7.1	3.79 V	316	62.5	4.4
2	5150.00	48.2 AV	54.0	-5.8	3.79 V	316	43.8	4.4
3	*5190.00	107.2 PK			3.41 V	333	67.7	39.5
4	*5190.00	95.6 AV			3.41 V	333	56.1	39.5
5	#10380.00	57.6 PK	68.2	-10.6	1.34 V	176	41.4	16.2
6	15570.00	-	-	-	-	-	-	-
7	20760.00	-	-	-	-	-	-	-
8	#25950.00	-	-	-	-	-	-	-
9	#31140.00	-	-	-	-	-	-	-
10	#36330.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

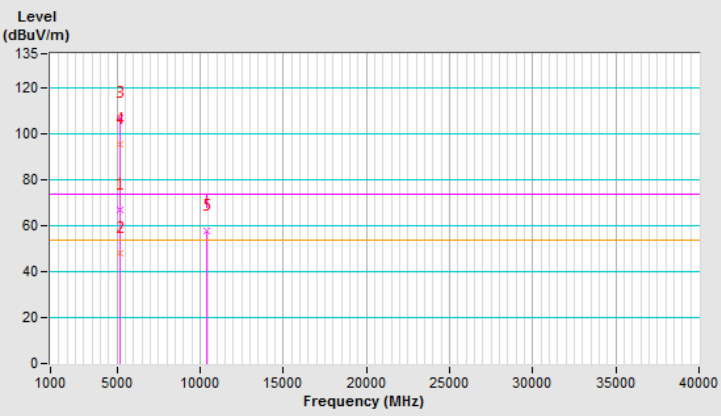


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA-MIMO
基 本 波 頻 率 ：	CH 46：5230 MHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=3kHz
量 測 場 地 溫 度 ：	24℃	量 測 場 地 濕 度 ：	67%RH
測 試 日 期 ：	108 年 05 月 27 日	測 試 者 ：	鄭詠璋

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	65.8 PK	74.0	-8.2	1.03 H	281	61.4	4.4
2	5150.00	52.7 AV	54.0	-1.3	1.03 H	281	48.3	4.4
3	*5230.00	114.6 PK			1.06 H	280	75.3	39.3
4	*5230.00	102.0 AV			1.06 H	280	62.7	39.3
5	5350.00	59.8 PK	74.0	-14.2	1.22 H	296	55.5	4.3
6	5350.00	45.7 AV	54.0	-8.3	1.22 H	296	41.4	4.3
7	#10460.00	58.1 PK	68.2	-10.1	2.64 H	233	41.3	16.8
8	15690.00	-	-	-	-	-	-	-
9	20920.00	-	-	-	-	-	-	-
10	#26150.00	-	-	-	-	-	-	-
11	31380.00	-	-	-	-	-	-	-
12	#36610.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

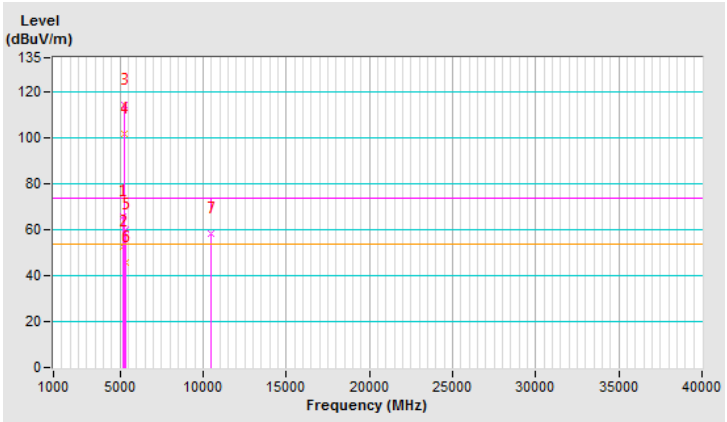


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA-MIMO
基 本 波 頻 率 ：	CH 46：5230 MHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=3kHz
量 測 場 地 溫 度 ：	24℃	量 測 場 地 濕 度 ：	67%RH
測 試 日 期 ：	108 年 05 月 27 日	測 試 者 ：	鄭詠璋

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	64.6 PK	74.0	-9.4	3.47 V	323	60.2	4.4
2	5150.00	51.1 AV	54.0	-2.9	3.47 V	323	46.7	4.4
3	*5230.00	112.7 PK			3.51 V	331	73.4	39.3
4	*5230.00	100.7 AV			3.51 V	331	61.4	39.3
5	5350.00	57.5 PK	74.0	-16.5	3.00 V	343	53.2	4.3
6	5350.00	44.1 AV	54.0	-9.9	3.00 V	343	39.8	4.3
7	#10460.00	58.5 PK	68.2	-9.7	1.83 V	124	41.7	16.8
8	15690.00	-	-	-	-	-	-	-
9	20920.00	-	-	-	-	-	-	-
10	#26150.00	-	-	-	-	-	-	-
11	31380.00	-	-	-	-	-	-	-
12	#36610.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

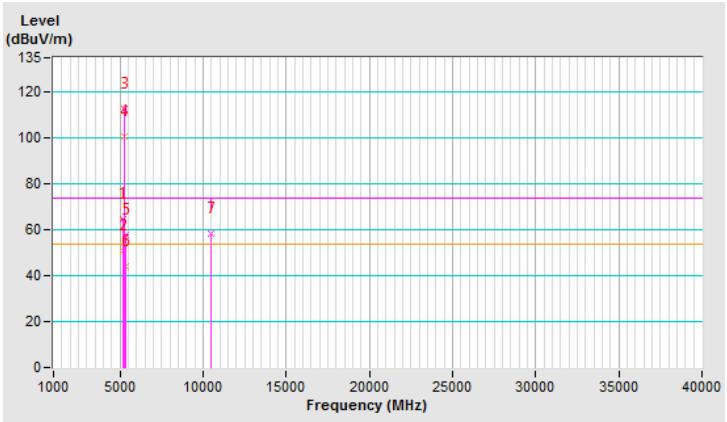


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA-MIMO
基 本 波 頻 率 ：	CH 151：5755 MHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=3kHz
量 測 場 地 溫 度 ：	24℃	量 測 場 地 濕 度 ：	67%RH
測 試 日 期 ：	108 年 05 月 27 日	測 試 者 ：	鄭詠璋

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5650.00	66.9 PK	68.2	-1.3	2.86 H	304	62.4	4.5
2	*5755.00	114.4 PK			2.32 H	24	74.3	40.1
3	*5755.00	102.8 AV			2.32 H	24	62.7	40.1
4	11510.00	58.6 PK	74.0	-15.4	3.46 H	351	40.5	18.1
5	11510.00	45.9 AV	54.0	-8.1	3.46 H	351	27.8	18.1
6	#17265.00	-	-	-	-	-	-	-
7	23020.00	-	-	-	-	-	-	-
8	#28775.00	-	-	-	-	-	-	-
9	#34530.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

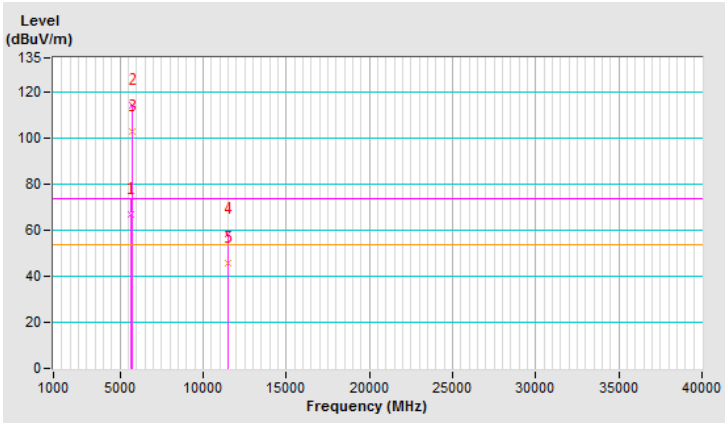


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA-MIMO
基 本 波 頻 率 ：	CH 151：5755 MHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=3kHz
量 測 場 地 溫 度 ：	24℃	量 測 場 地 濕 度 ：	67%RH
測 試 日 期 ：	108 年 05 月 27 日	測 試 者 ：	鄭詠璋

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5650.00	65.7 PK	68.2	-2.5	3.79 V	332	61.2	4.5
2	*5755.00	115.5 PK			3.88 V	348	75.4	40.1
3	*5755.00	103.4 AV			3.88 V	348	63.3	40.1
4	11510.00	61.4 PK	74.0	-12.6	2.28 V	177	43.3	18.1
5	11510.00	46.2 AV	54.0	-7.8	2.28 V	177	28.1	18.1
6	#17265.00	-	-	-	-	-	-	-
7	23020.00	-	-	-	-	-	-	-
8	#28775.00	-	-	-	-	-	-	-
9	#34530.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

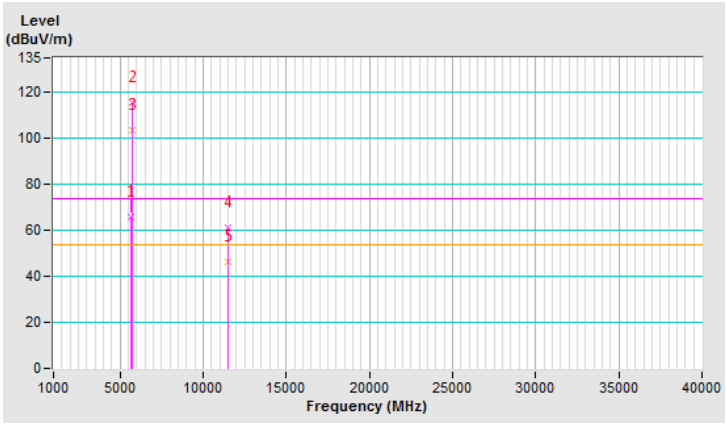


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA-MIMO
基 本 波 頻 率 ：	CH 151：5755 MHz (OOBE)	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=3kHz
量 測 場 地 溫 度 ：	24℃	量 測 場 地 濕 度 ：	67%RH
測 試 日 期 ：	108 年 05 月 27 日	測 試 者 ：	鄭詠璋

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5648.72	63.6 PK	68.2	-4.6	2.32 H	24	59.1	4.5
2	#5939.74	60.4 PK	68.2	-7.8	2.32 H	24	55.1	5.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

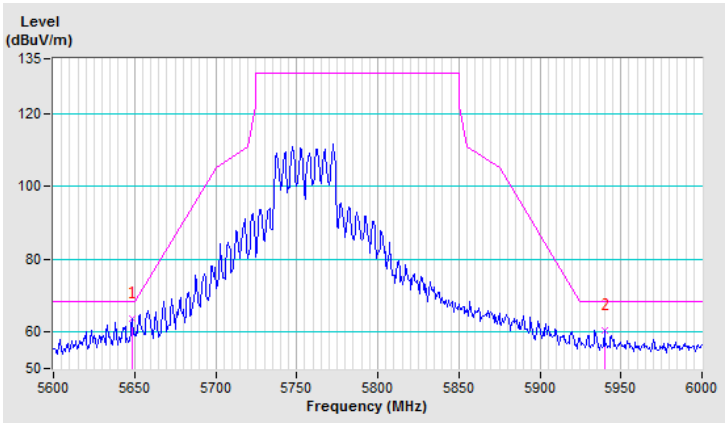


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA-MIMO
基 本 波 頻 率 ：	CH 151：5755 MHz (OOBE)	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=3kHz
量 測 場 地 溫 度 ：	24℃	量 測 場 地 濕 度 ：	67%RH
測 試 日 期 ：	108 年 05 月 27 日	測 試 者 ：	鄭詠璋

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5644.87	63.7 PK	68.2	-4.5	3.88 V	348	59.2	4.5
2	#5966.67	60.6 PK	68.2	-7.6	3.88 V	348	55.3	5.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

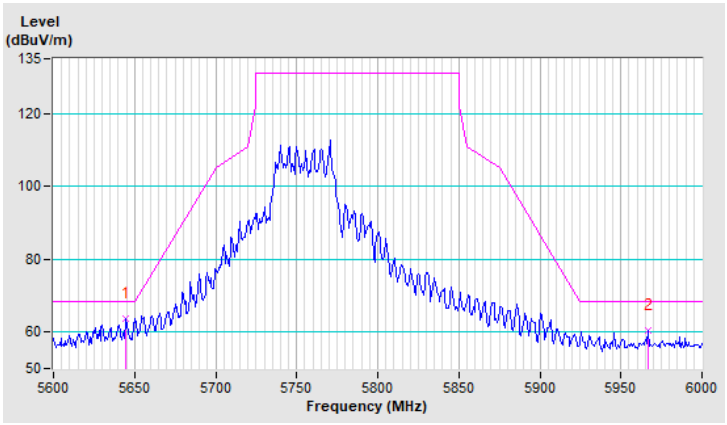


操作模式：	發射	調變技術：	OFDMA-MIMO
基本波頻率：	CH 159：5795 MHz	測試儀器：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=3kHz
量測場地溫度：	24℃	量測場地濕度：	67%RH
測試日期：	108 年 05 月 27 日	測試者：	鄭詠璋

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5795.00	116.4 PK			2.39 H	27	76.0	40.4
2	*5795.00	104.3 AV			2.39 H	27	63.9	40.4
3	#5925.00	67.2 PK	68.2	-1.0	1.61 H	27	61.9	5.3
4	11590.00	60.8 PK	74.0	-13.2	3.35 H	342	43.2	17.6
5	11590.00	45.6 AV	54.0	-8.4	3.35 H	342	28.0	17.6
6	#17385.00	-	-	-	-	-	-	-
7	#23180.00	-	-	-	-	-	-	-
8	#28975.00	-	-	-	-	-	-	-
9	#34770.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

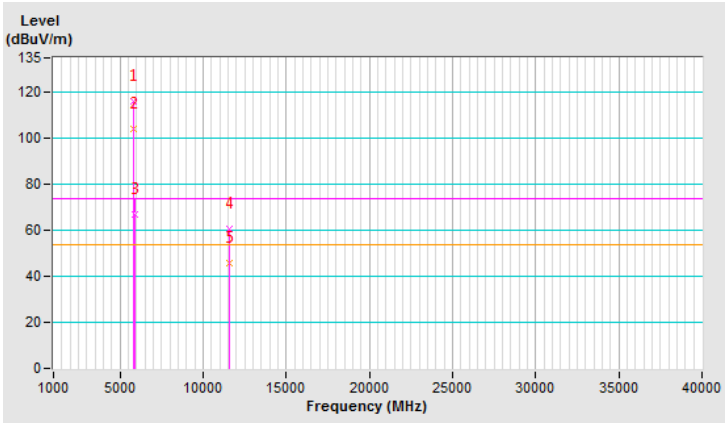


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA-MIMO
基 本 波 頻 率 ：	CH 159：5795 MHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=3kHz
量 測 場 地 溫 度 ：	24℃	量 測 場 地 濕 度 ：	67%RH
測 試 日 期 ：	108 年 05 月 27 日	測 試 者 ：	鄭詠璋

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5795.00	116.6 PK			3.81 V	349	76.2	40.4
2	*5795.00	104.5 AV			3.81 V	349	64.1	40.4
3	#5925.00	66.3 PK	68.2	-1.9	3.81 V	352	61.0	5.3
4	11590.00	61.2 PK	74.0	-12.8	2.16 V	193	43.6	17.6
5	11590.00	46.3 AV	54.0	-7.7	2.16 V	193	28.7	17.6
6	#17385.00	-	-	-	-	-	-	-
7	#23180.00	-	-	-	-	-	-	-
8	#28975.00	-	-	-	-	-	-	-
9	#34770.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

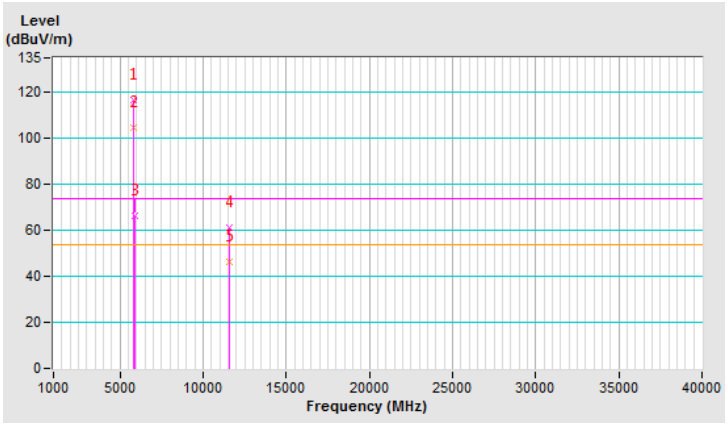


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA-MIMO
基 本 波 頻 率 ：	CH 159：5795 MHz (OOBE)	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=3kHz
量 測 場 地 溫 度 ：	24℃	量 測 場 地 濕 度 ：	67%RH
測 試 日 期 ：	108 年 05 月 27 日	測 試 者 ：	鄭詠璋

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5636.54	55.4 PK	68.2	-12.8	2.39 H	27	50.9	4.5
2	#5939.74	62.0 PK	68.2	-6.2	2.39 H	27	56.7	5.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

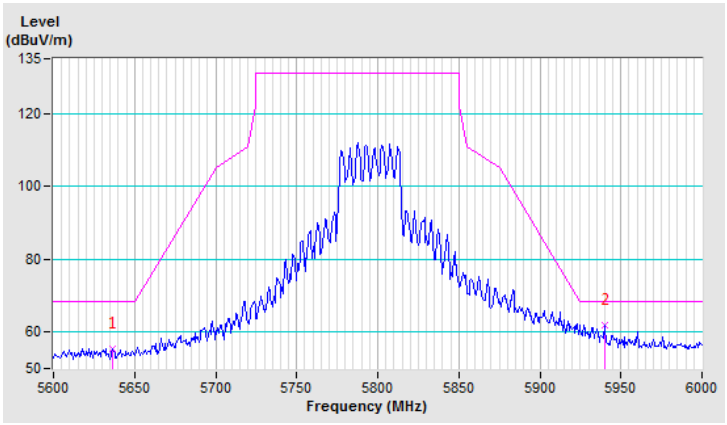


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA-MIMO
基 本 波 頻 率 ：	CH 159：5795 MHz (OOBE)	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=3kHz
量 測 場 地 溫 度 ：	24℃	量 測 場 地 濕 度 ：	67%RH
測 試 日 期 ：	108 年 05 月 27 日	測 試 者 ：	鄭詠璋

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5600.00	55.0 PK	68.2	-13.2	3.81 V	349	50.4	4.6
2	#5925.00	63.8 PK	68.2	-4.4	3.81 V	349	58.5	5.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

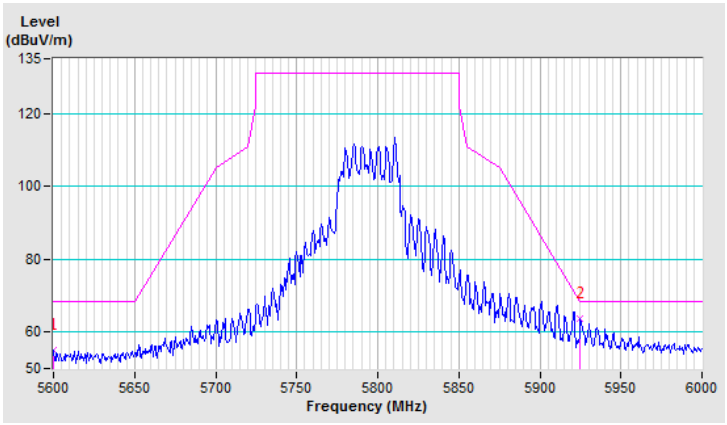


802.11ax (HE80)

操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA-MIMO
基 本 波 頻 率 ：	CH 42：5210 MHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=3kHz
量 測 場 地 溫 度 ：	24℃	量 測 場 地 濕 度 ：	67%RH
測 試 日 期 ：	108 年 05 月 27 日	測 試 者 ：	鄭詠璋

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	69.7 PK	74.0	-4.3	1.73 H	303	65.3	4.4
2	5150.00	52.5 AV	54.0	-1.5	1.73 H	303	48.1	4.4
3	*5210.00	106.1 PK			1.58 H	302	66.7	39.4
4	*5210.00	94.4 AV			1.58 H	302	55.0	39.4
5	5350.00	56.9 PK	74.0	-17.1	1.66 H	312	52.6	4.3
6	5350.00	44.3 AV	54.0	-9.7	1.66 H	312	40.0	4.3
7	#10420.00	58.1 PK	68.2	-10.1	2.18 H	179	41.6	16.5
8	15630.00	-	-	-	-	-	-	-
9	20840.00	-	-	-	-	-	-	-
10	#26050.00	-	-	-	-	-	-	-
11	31260.00	-	-	-	-	-	-	-
12	36470.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

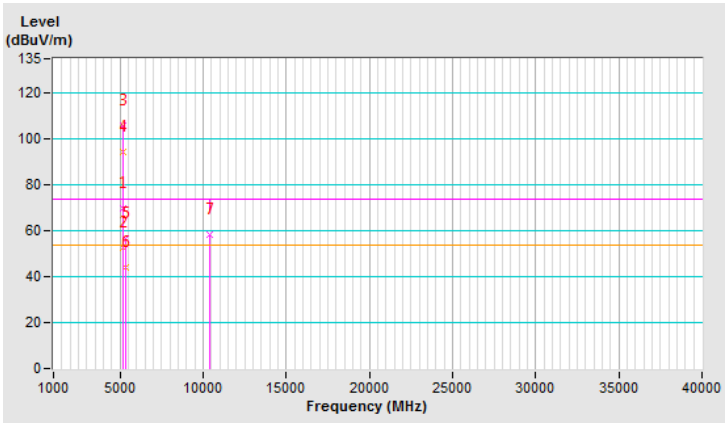


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA-MIMO
基 本 波 頻 率 ：	CH 42：5210 MHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=3kHz
量 測 場 地 溫 度 ：	24℃	量 測 場 地 濕 度 ：	67%RH
測 試 日 期 ：	108 年 05 月 27 日	測 試 者 ：	鄭詠璋

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	69.2 PK	74.0	-4.8	3.86 V	349	64.8	4.4
2	5150.00	51.4 AV	54.0	-2.6	3.86 V	349	47.0	4.4
3	*5210.00	104.5 PK			1.00 V	331	65.1	39.4
4	*5210.00	93.2 AV			1.00 V	331	53.8	39.4
5	5350.00	56.9 PK	74.0	-17.1	3.64 V	321	52.6	4.3
6	5350.00	44.3 AV	54.0	-9.7	3.64 V	321	40.0	4.3
7	#10420.00	57.1 PK	68.2	-11.1	1.67 V	113	40.6	16.5
8	15630.00	-	-	-	-	-	-	-
9	20840.00	-	-	-	-	-	-	-
10	#26050.00	-	-	-	-	-	-	-
11	31260.00	-	-	-	-	-	-	-
12	36470.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

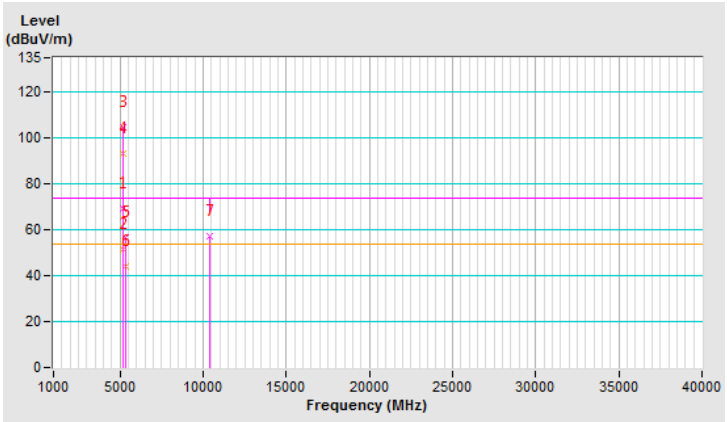


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA-MIMO
基 本 波 頻 率 ：	CH 155：5775 MHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=3kHz
量 測 場 地 溫 度 ：	24℃	量 測 場 地 濕 度 ：	67%RH
測 試 日 期 ：	108 年 05 月 27 日	測 試 者 ：	鄭詠璋

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5650.00	60.8 PK	68.2	-7.4	1.69 H	21	56.3	4.5
2	*5775.00	108.1 PK			1.26 H	27	67.8	40.3
3	*5775.00	96.4 AV			1.26 H	27	56.1	40.3
4	#5925.00	63.3 PK	68.2	-4.9	1.60 H	29	58.0	5.3
5	11550.00	60.5 PK	74.0	-13.5	3.26 H	355	42.6	17.9
6	11550.00	45.7 AV	54.0	-8.3	3.26 H	355	27.8	17.9
7	#17325.00	-	-	-	-	-	-	-
8	23100.00	-	-	-	-	-	-	-
9	#28875.00	-	-	-	-	-	-	-
10	#34650.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

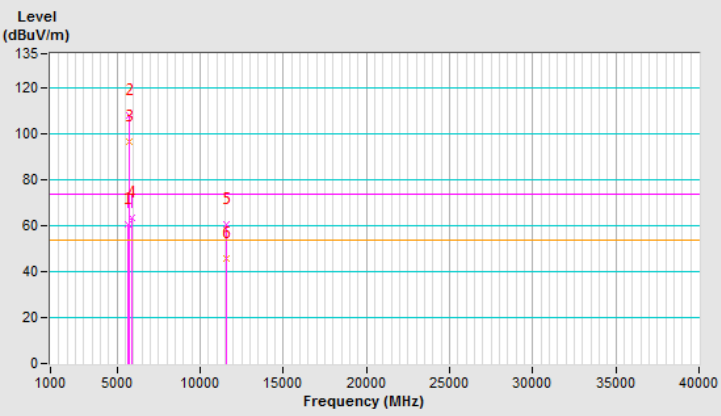


操作模式：	發射	調變技術：	OFDMA-MIMO
基本波頻率：	CH 155：5775 MHz	測試儀器：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=3kHz
量測場地溫度：	24℃	量測場地濕度：	67%RH
測試日期：	108 年 05 月 27 日	測試者：	鄭詠璋

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5650.00	59.7 PK	68.2	-8.5	3.19 V	325	55.2	4.5
2	*5775.00	106.7 PK			2.80 V	354	66.4	40.3
3	*5775.00	95.5 AV			2.80 V	354	55.2	40.3
4	#5925.00	60.8 PK	68.2	-7.4	2.96 V	334	55.5	5.3
5	11550.00	61.1 PK	74.0	-12.9	2.00 V	162	43.2	17.9
6	11550.00	46.4 AV	54.0	-7.6	2.00 V	162	28.5	17.9
7	#17325.00	-	-	-	-	-	-	-
8	23100.00	-	-	-	-	-	-	-
9	#28875.00	-	-	-	-	-	-	-
10	#34650.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

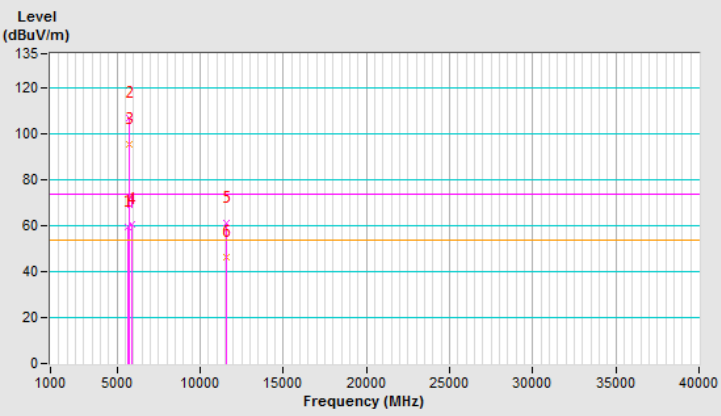


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA-MIMO
基 本 波 頻 率 ：	CH 155：5775 MHz (OOBE)	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=3kHz
量 測 場 地 溫 度 ：	24℃	量 測 場 地 濕 度 ：	67%RH
測 試 日 期 ：	108 年 05 月 27 日	測 試 者 ：	鄭詠璋

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5648.72	57.8 PK	68.2	-10.4	1.26 H	27	53.3	4.5
2	#5925.00	60.7 PK	68.2	-7.5	1.26 H	27	55.4	5.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

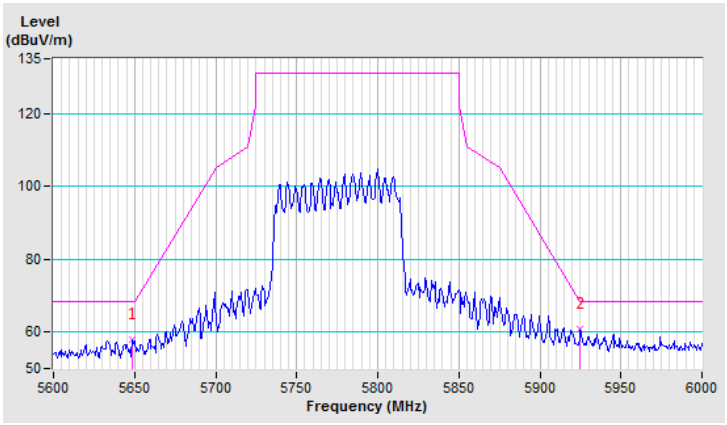


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA-MIMO
基 本 波 頻 率 ：	CH 155：5775 MHz (OOBE)	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=3kHz
量 測 場 地 溫 度 ：	24℃	量 測 場 地 濕 度 ：	67%RH
測 試 日 期 ：	108 年 05 月 27 日	測 試 者 ：	鄭詠璋

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5646.79	56.7 PK	68.2	-11.5	2.80 V	354	52.2	4.5
2	#5942.31	59.0 PK	68.2	-9.2	2.80 V	354	53.7	5.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

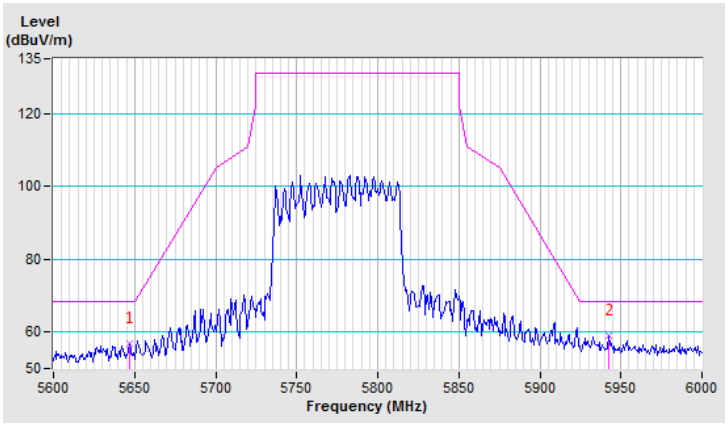

4TX


802.11a

操 作 模 式 ：	發射	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 36：5180 MHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	71%RH
測 試 日 期 ：	108 年 02 月 23 日	測 試 者 ：	張家誠

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	71.3 PK	74.0	-2.7	1.18 H	65	58.7	12.6
2	5150.00	53.0 AV	54.0	-1.0	1.18 H	65	40.4	12.6
3	*5180.00	116.1 PK			1.17 H	55	74.6	41.5
4	*5180.00	106.7 AV			1.17 H	55	65.2	41.5
5	#10360.00	63.3 PK	68.2	-4.9	1.22 H	64	40.8	22.5
6	15540.00	-	-	-	-	-	-	-
7	20720.00	-	-	-	-	-	-	-
8	#25900.00	-	-	-	-	-	-	-
9	#31080.00	-	-	-	-	-	-	-
10	#36260.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

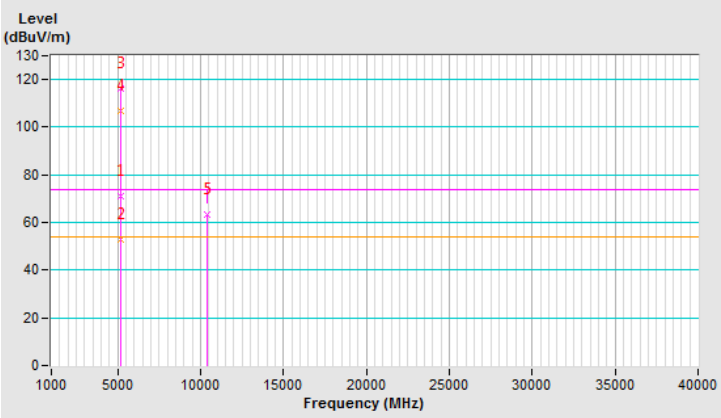


操 作 模 式 ：	發射	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 36：5180 MHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	71%RH
測 試 日 期 ：	108 年 02 月 23 日	測 試 者 ：	張家誠

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	68.3 PK	74.0	-5.7	3.25 V	24	55.7	12.6
2	5150.00	49.5 AV	54.0	-4.5	3.25 V	24	36.9	12.6
3	*5180.00	112.1 PK			3.90 V	40	70.6	41.5
4	*5180.00	102.7 AV			3.90 V	40	61.2	41.5
5	#10360.00	62.6 PK	68.2	-5.6	2.59 V	245	40.1	22.5
6	15540.00	-	-	-	-	-	-	-
7	20720.00	-	-	-	-	-	-	-
8	#25900.00	-	-	-	-	-	-	-
9	#31080.00	-	-	-	-	-	-	-
10	#36260.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

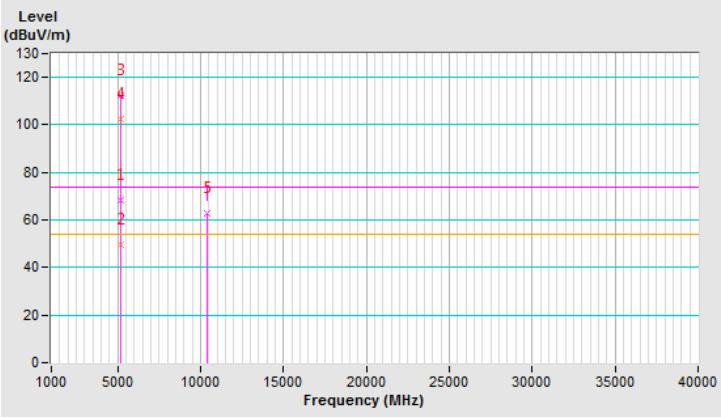


操作模式：	發射	調變技術：	OFDM
基本波頻率：	CH 40：5200 MHz	測試儀器：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量測場地溫度：	25℃	量測場地濕度：	71%RH
測試日期：	108 年 02 月 23 日	測試者：	張家誠

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	71.1 PK	74.0	-2.9	1.21 H	60	58.5	12.6
2	5150.00	52.7 AV	54.0	-1.3	1.21 H	60	40.1	12.6
3	*5200.00	119.1 PK			1.18 H	56	77.6	41.5
4	*5200.00	110.0 AV			1.18 H	56	68.5	41.5
5	#10400.00	63.9 PK	68.2	-4.3	2.11 H	128	41.0	22.9
6	15600.00	-	-	-	-	-	-	-
7	20800.00	-	-	-	-	-	-	-
8	#26000.00	-	-	-	-	-	-	-
9	31200.00	-	-	-	-	-	-	-
10	#36400.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

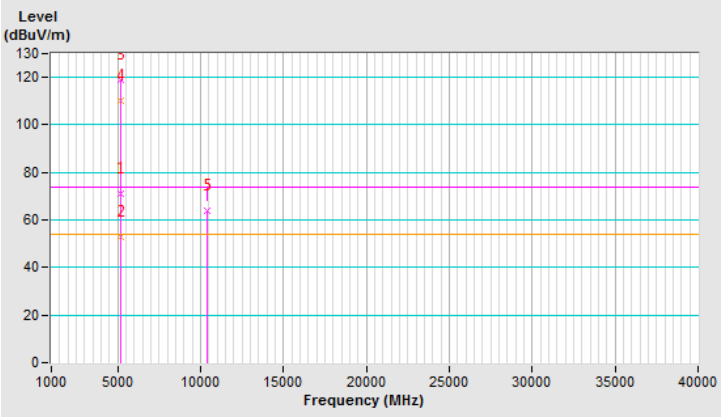


操 作 模 式 ：	發射	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 40：5200 MHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	71%RH
測 試 日 期 ：	108 年 02 月 23 日	測 試 者 ：	張家誠

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	68.1 PK	74.0	-5.9	3.85 V	36	55.5	12.6
2	5150.00	49.4 AV	54.0	-4.6	3.85 V	36	36.8	12.6
3	*5200.00	115.0 PK			3.95 V	26	73.5	41.5
4	*5200.00	105.8 AV			3.95 V	26	64.3	41.5
5	#10400.00	62.9 PK	68.2	-5.3	2.62 V	232	40.0	22.9
6	15600.00	-	-	-	-	-	-	-
7	20800.00	-	-	-	-	-	-	-
8	#26000.00	-	-	-	-	-	-	-
9	31200.00	-	-	-	-	-	-	-
10	#36400.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

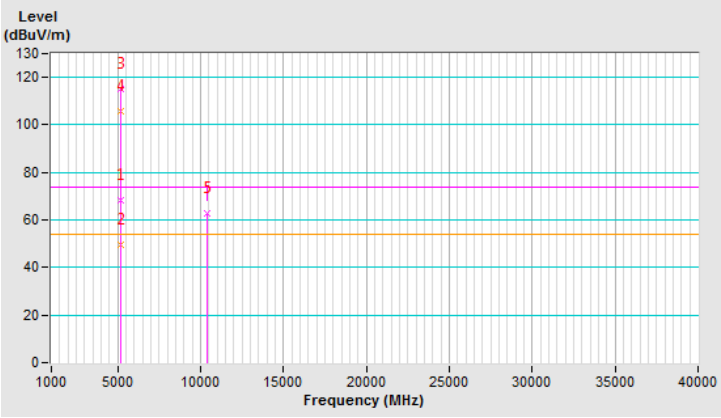


操 作 模 式 ：	發射	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 48：5240 MHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	71%RH
測 試 日 期 ：	108 年 02 月 23 日	測 試 者 ：	張家誠

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5240.00	120.7 PK			1.21 H	58	79.5	41.2
2	*5240.00	110.5 AV			1.21 H	58	69.3	41.2
3	5350.00	61.3 PK	74.0	-12.7	1.19 H	60	48.9	12.4
4	5350.00	48.5 AV	54.0	-5.5	1.19 H	60	36.1	12.4
5	#10480.00	63.7 PK	68.2	-4.5	2.12 H	211	40.9	22.8
6	15720.00	-	-	-	-	-	-	-
7	20960.00	-	-	-	-	-	-	-
8	#26200.00	-	-	-	-	-	-	-
9	31440.00	-	-	-	-	-	-	-
10	#36680.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

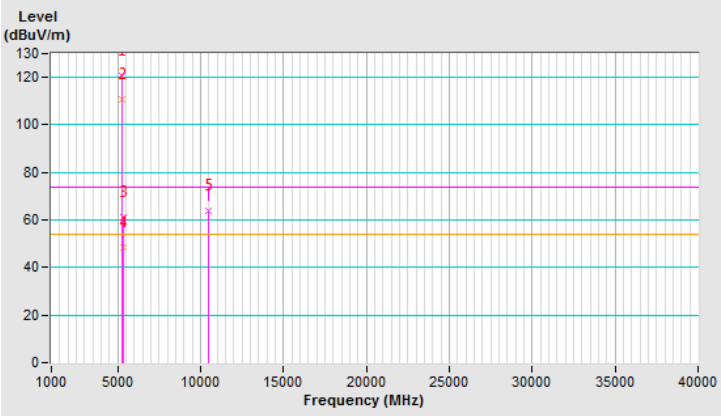


操 作 模 式 ：	發射	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 48：5240 MHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	71%RH
測 試 日 期 ：	108 年 02 月 23 日	測 試 者 ：	張家誠

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5240.00	116.6 PK			3.89 V	36	75.4	41.2
2	*5240.00	106.3 AV			3.89 V	36	65.1	41.2
3	5350.00	60.3 PK	74.0	-13.7	3.88 V	40	47.9	12.4
4	5350.00	47.5 AV	54.0	-6.5	3.88 V	40	35.1	12.4
5	#10480.00	63.0 PK	68.2	-5.2	2.62 V	200	40.2	22.8
6	15720.00	-	-	-	-	-	-	-
7	20960.00	-	-	-	-	-	-	-
8	#26200.00	-	-	-	-	-	-	-
9	31440.00	-	-	-	-	-	-	-
10	#36680.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

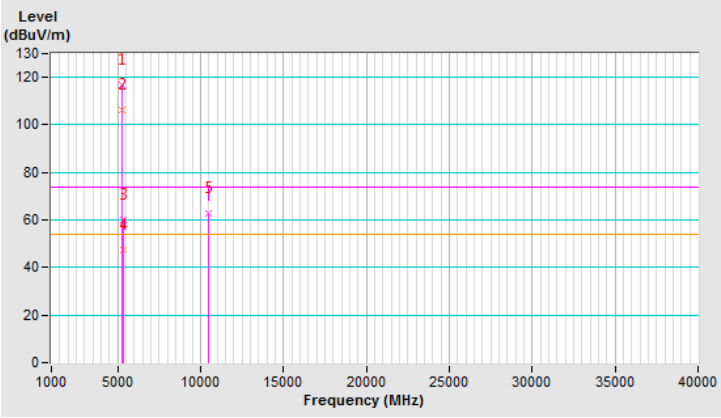


操 作 模 式 ：	發射	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 149：5745 MHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 03 月 06 日	測 試 者 ：	張家誠

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5745.00	120.0 PK			1.00 H	57	77.5	42.5
2	*5745.00	110.5 AV			1.00 H	57	68.0	42.5
3	11490.00	64.2 PK	74.0	-9.8	1.00 H	220	40.1	24.1
4	11490.00	52.8 AV	54.0	-1.2	1.00 H	220	28.7	24.1
5	#17235.00	-	-	-	-	-	-	-
6	22980.00	-	-	-	-	-	-	-
7	#28725.00	-	-	-	-	-	-	-
8	#34470.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

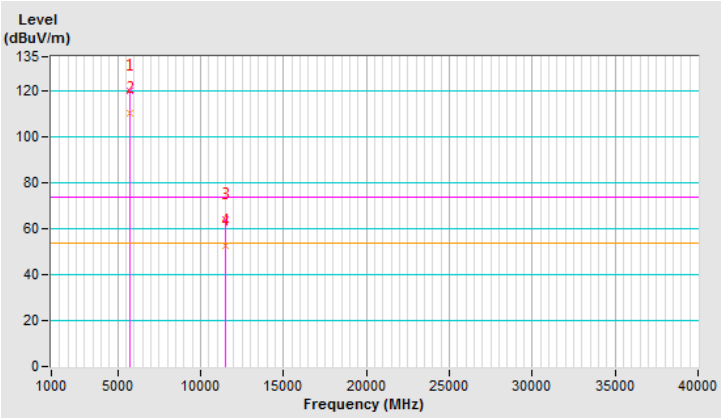


操 作 模 式 ：	發射	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 149：5745 MHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 03 月 06 日	測 試 者 ：	張家誠

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5745.00	118.3 PK			3.89 V	20	75.8	42.5
2	*5745.00	108.2 AV			3.89 V	20	65.7	42.5
3	11490.00	62.7 PK	74.0	-11.3	1.99 V	273	38.6	24.1
4	11490.00	51.6 AV	54.0	-2.4	1.99 V	273	27.5	24.1
5	#17235.00	-	-	-	-	-	-	-
6	22980.00	-	-	-	-	-	-	-
7	#28725.00	-	-	-	-	-	-	-
8	#34470.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

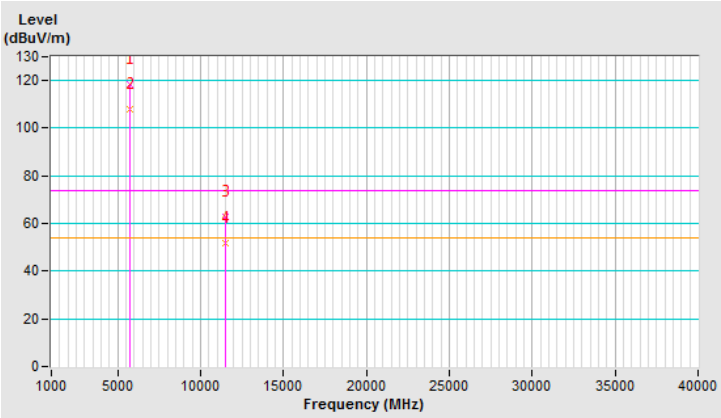


操 作 模 式 ：	發射	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 149：5745 MHz (OOBE)	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 03 月 06 日	測 試 者 ：	張家誠

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5627.20	63.5 PK	68.2	-4.7	1.00 H	57	50.8	12.7
2	#5939.20	63.8 PK	68.2	-4.4	1.00 H	57	50.2	13.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

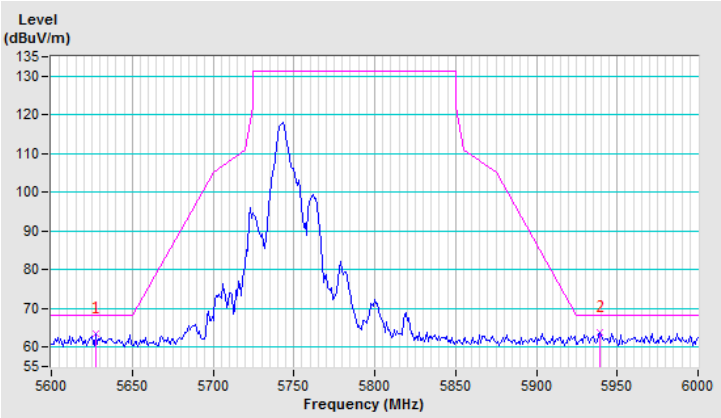


操 作 模 式 ：	發射	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 149：5745 MHz (OOBE)	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 03 月 06 日	測 試 者 ：	張家誠

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5638.40	62.7 PK	68.2	-5.5	3.89 V	20	50.0	12.7
2	#5990.40	62.7 PK	68.2	-5.5	3.89 V	20	48.9	13.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

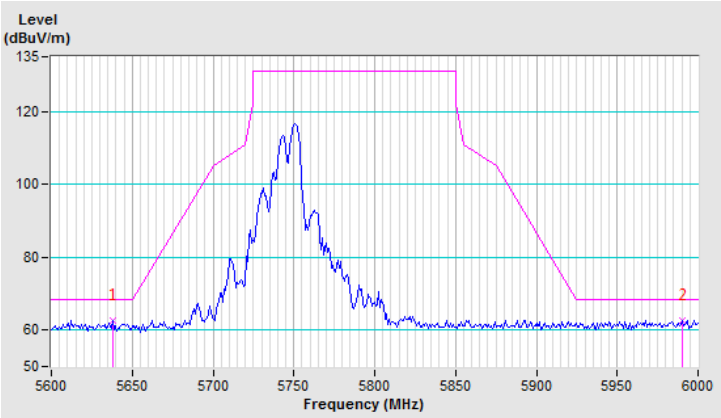


操 作 模 式 ：	發射	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 157：5785 MHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 03 月 06 日	測 試 者 ：	張家誠

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5785.00	119.7 PK			1.00 H	58	77.1	42.6
2	*5785.00	110.3 AV			1.00 H	58	67.7	42.6
3	11570.00	64.8 PK	74.0	-9.2	1.00 H	268	40.8	24.0
4	11570.00	52.8 AV	54.0	-1.2	1.00 H	268	28.8	24.0
5	#17355.00	-	-	-	-	-	-	-
6	#23140.00	-	-	-	-	-	-	-
7	#28925.00	-	-	-	-	-	-	-
8	#34710.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

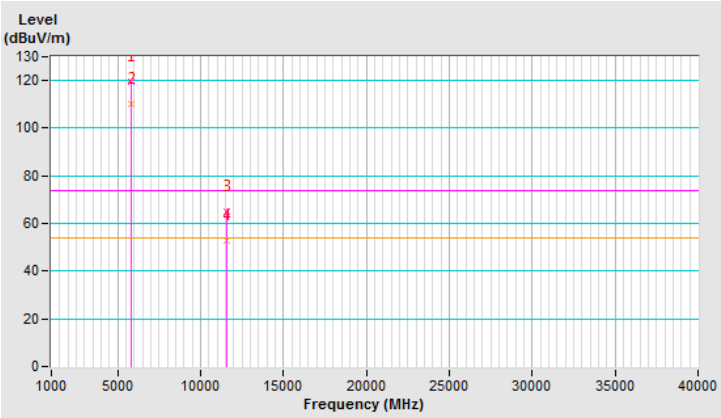


操 作 模 式 ：	發射	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 157：5785 MHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 03 月 06 日	測 試 者 ：	張家誠

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5785.00	119.1 PK			3.87 V	21	76.5	42.6
2	*5785.00	108.9 AV			3.87 V	21	66.3	42.6
3	11570.00	63.1 PK	74.0	-10.9	1.63 V	222	39.1	24.0
4	11570.00	52.1 AV	54.0	-1.9	1.63 V	222	28.1	24.0
5	#17355.00	-	-	-	-	-	-	-
6	#23140.00	-	-	-	-	-	-	-
7	#28925.00	-	-	-	-	-	-	-
8	#34710.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

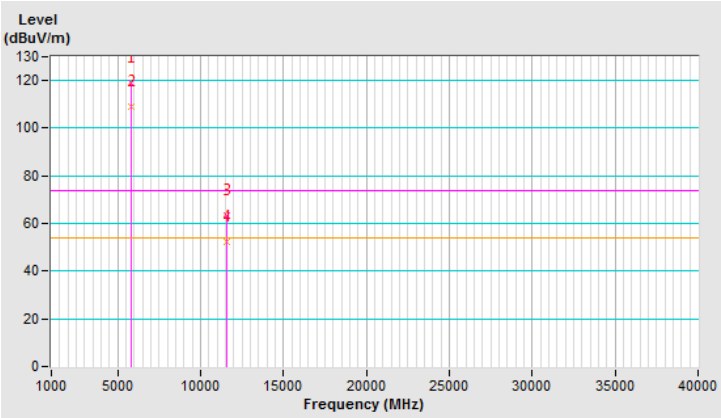


操 作 模 式 ：	發射	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 157：5785 MHz (OOBE)	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 03 月 06 日	測 試 者 ：	張家誠

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5629.60	63.4 PK	68.2	-4.8	1.00 H	58	50.7	12.7
2	#5970.40	64.4 PK	68.2	-3.8	1.00 H	58	50.7	13.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

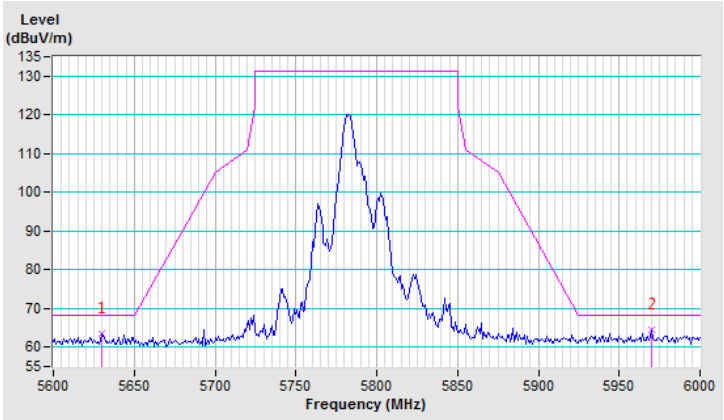


操 作 模 式 ：	發射	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 157：5785 MHz (OOBE)	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 03 月 06 日	測 試 者 ：	張家誠

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5616.00	63.0 PK	68.2	-5.2	3.87 V	21	50.3	12.7
2	#5996.00	63.6 PK	68.2	-4.6	3.87 V	21	49.8	13.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

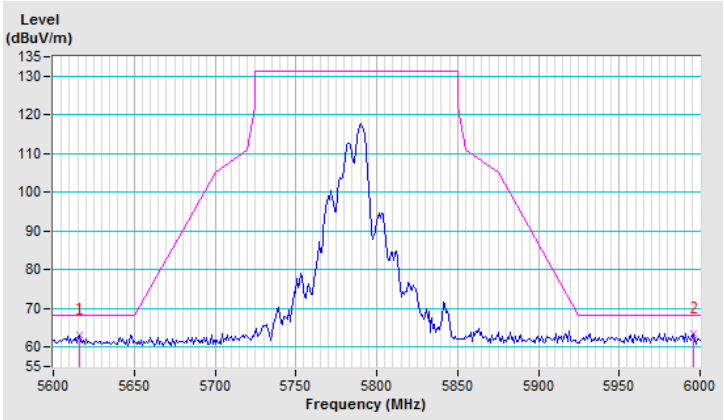


操 作 模 式 ：	發射	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 165：5825 MHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 03 月 06 日	測 試 者 ：	張家誠

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5825.00	120.2 PK			1.00 H	56	77.6	42.6
2	*5825.00	110.6 AV			1.00 H	56	68.0	42.6
3	11650.00	64.2 PK	74.0	-9.8	1.00 H	241	40.6	23.6
4	11650.00	52.8 AV	54.0	-1.2	1.00 H	241	29.2	23.6
5	#17475.00	-	-	-	-	-	-	-
6	#23300.00	-	-	-	-	-	-	-
7	#29125.00	-	-	-	-	-	-	-
8	#34950.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

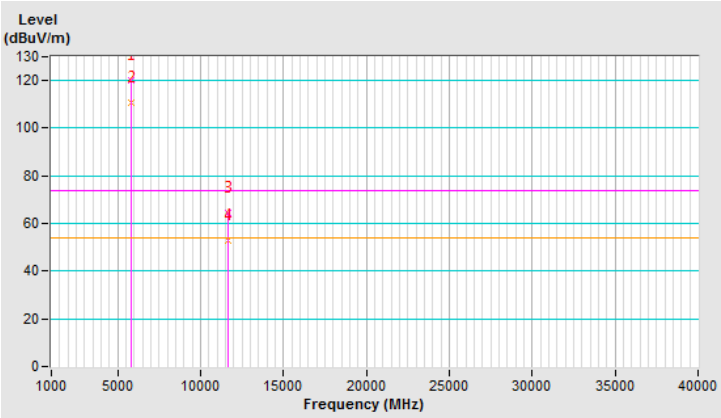


操 作 模 式 ：	發射	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 165：5825 MHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 03 月 06 日	測 試 者 ：	張家誠

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5825.00	117.1 PK			3.88 V	21	74.5	42.6
2	*5825.00	107.7 AV			3.88 V	21	65.1	42.6
3	11650.00	62.5 PK	74.0	-11.5	1.90 V	216	38.9	23.6
4	11650.00	51.6 AV	54.0	-2.4	1.90 V	216	28.0	23.6
5	#17475.00	-	-	-	-	-	-	-
6	#23300.00	-	-	-	-	-	-	-
7	#29125.00	-	-	-	-	-	-	-
8	#34950.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

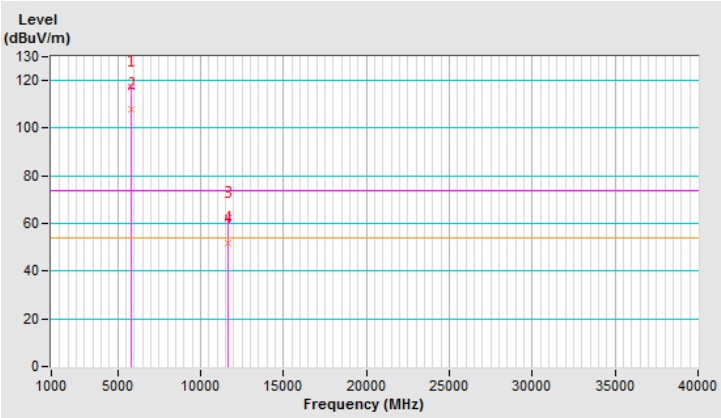


操 作 模 式 ：	發射	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 165：5825 MHz (OOBE)	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 03 月 06 日	測 試 者 ：	張家誠

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5626.40	63.4 PK	68.2	-4.8	1.00 H	56	50.7	12.7
2	#5954.40	63.2 PK	68.2	-5.0	1.00 H	56	49.6	13.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

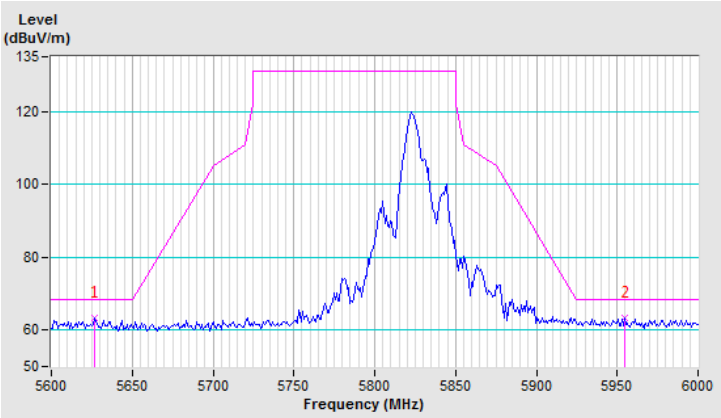


操 作 模 式 ：	發射	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 165：5825 MHz (OOBE)	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 03 月 06 日	測 試 者 ：	張家誠

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5611.20	63.0 PK	68.2	-5.2	3.88 V	21	50.3	12.7
2	#5928.80	63.8 PK	68.2	-4.4	3.88 V	21	50.2	13.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

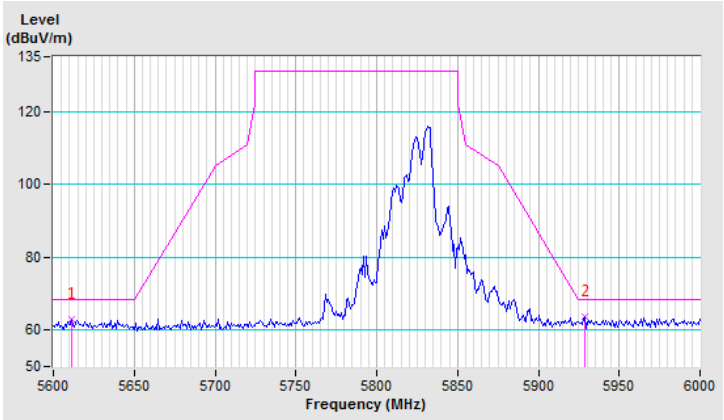


802.11ax (HE20)

操作模式：	發射	調變技術：	OFDMA-MIMO
基本波頻率：	CH 36：5180 MHz	測試儀器：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量測場地溫度：	25℃	量測場地濕度：	71%RH
測試日期：	108 年 02 月 23 日	測試者：	張家誠

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	70.9 PK	74.0	-3.1	1.25 H	68	58.3	12.6
2	5150.00	52.8 AV	54.0	-1.2	1.25 H	68	40.2	12.6
3	*5180.00	116.1 PK			1.26 H	56	74.6	41.5
4	*5180.00	106.0 AV			1.26 H	56	64.5	41.5
5	#10360.00	62.8 PK	68.2	-5.4	2.62 H	222	40.3	22.5
6	15540.00	-	-	-	-	-	-	-
7	20720.00	-	-	-	-	-	-	-
8	#25900.00	-	-	-	-	-	-	-
9	#31080.00	-	-	-	-	-	-	-
10	#36260.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

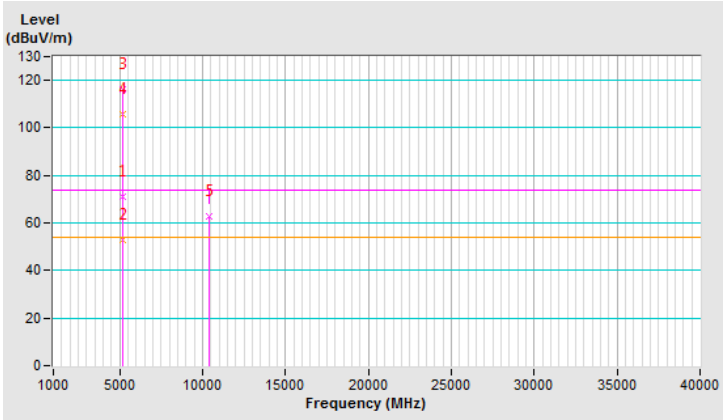


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA-MIMO
基 本 波 頻 率 ：	CH 36：5180 MHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	71%RH
測 試 日 期 ：	108 年 02 月 23 日	測 試 者 ：	張家誠

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	67.7 PK	74.0	-6.3	3.91 V	40	55.1	12.6
2	5150.00	49.4 AV	54.0	-4.6	3.91 V	40	36.8	12.6
3	*5180.00	112.1 PK			3.96 V	32	70.6	41.5
4	*5180.00	102.0 AV			3.96 V	32	60.5	41.5
5	#10360.00	62.5 PK	68.2	-5.7	2.26 V	232	40.0	22.5
6	15540.00	-	-	-	-	-	-	-
7	20720.00	-	-	-	-	-	-	-
8	#25900.00	-	-	-	-	-	-	-
9	#31080.00	-	-	-	-	-	-	-
10	#36260.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

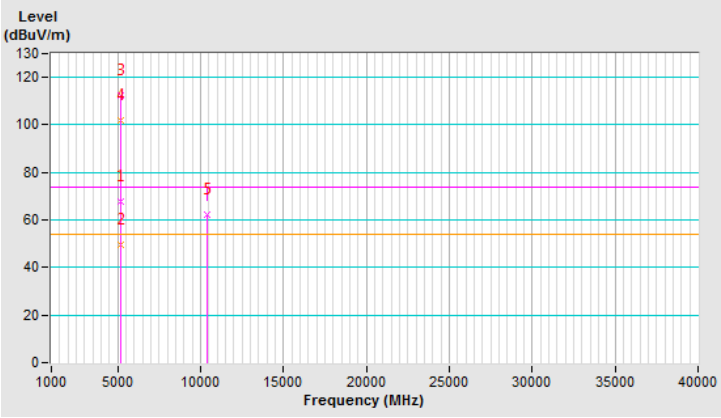


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA-MIMO
基 本 波 頻 率 ：	CH 40：5200 MHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	71%RH
測 試 日 期 ：	108 年 02 月 23 日	測 試 者 ：	張家誠

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	69.0 PK	74.0	-5.0	1.25 H	68	56.4	12.6
2	5150.00	52.7 AV	54.0	-1.3	1.25 H	68	40.1	12.6
3	*5200.00	119.2 PK			1.28 H	60	77.7	41.5
4	*5200.00	109.5 AV			1.28 H	60	68.0	41.5
5	#10400.00	63.5 PK	68.2	-4.7	2.63 H	299	40.6	22.9
6	15600.00	-	-	-	-	-	-	-
7	20800.00	-	-	-	-	-	-	-
8	#26000.00	-	-	-	-	-	-	-
9	31200.00	-	-	-	-	-	-	-
10	#36400.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

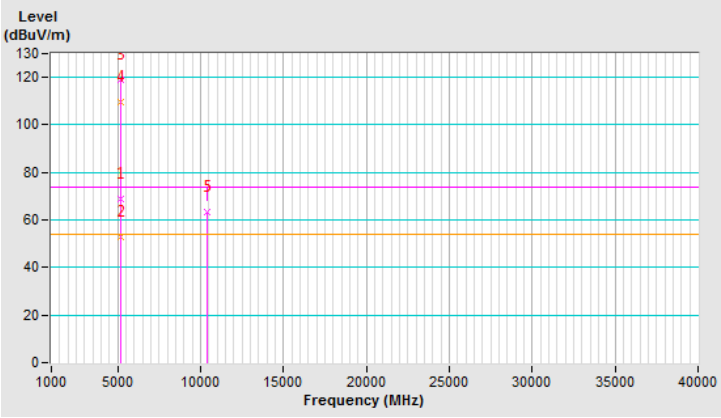


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA-MIMO
基 本 波 頻 率 ：	CH 40：5200 MHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	71%RH
測 試 日 期 ：	108 年 02 月 23 日	測 試 者 ：	張家誠

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	66.0 PK	74.0	-8.0	3.89 V	40	53.4	12.6
2	5150.00	49.3 AV	54.0	-4.7	3.89 V	40	36.7	12.6
3	*5200.00	115.2 PK			3.89 V	38	73.7	41.5
4	*5200.00	105.5 AV			3.89 V	38	64.0	41.5
5	#10400.00	62.8 PK	68.2	-5.4	2.66 V	252	39.9	22.9
6	15600.00	-	-	-	-	-	-	-
7	20800.00	-	-	-	-	-	-	-
8	#26000.00	-	-	-	-	-	-	-
9	31200.00	-	-	-	-	-	-	-
10	#36400.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

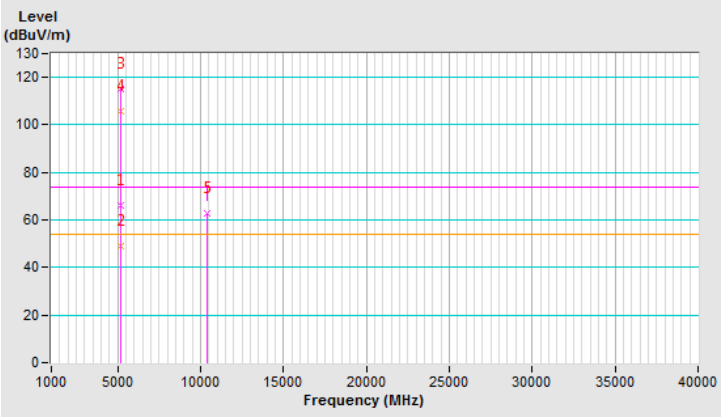


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA-MIMO
基 本 波 頻 率 ：	CH 48：5240 MHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	71%RH
測 試 日 期 ：	108 年 02 月 23 日	測 試 者 ：	張家誠

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5240.00	121.5 PK			1.20 H	58	80.3	41.2
2	*5240.00	111.5 AV			1.20 H	58	70.3	41.2
3	5350.00	60.8 PK	74.0	-13.2	1.22 H	61	48.4	12.4
4	5350.00	48.3 AV	54.0	-5.7	1.22 H	61	35.9	12.4
5	#10400.00	63.6 PK	68.2	-4.6	2.62 H	252	40.7	22.9
6	#10480.00	-	-	-	-	-	-	-
7	15720.00	-	-	-	-	-	-	-
8	20960.00	-	-	-	-	-	-	-
9	#26200.00	-	-	-	-	-	-	-
10	31440.00	-	-	-	-	-	-	-
11	#36680.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

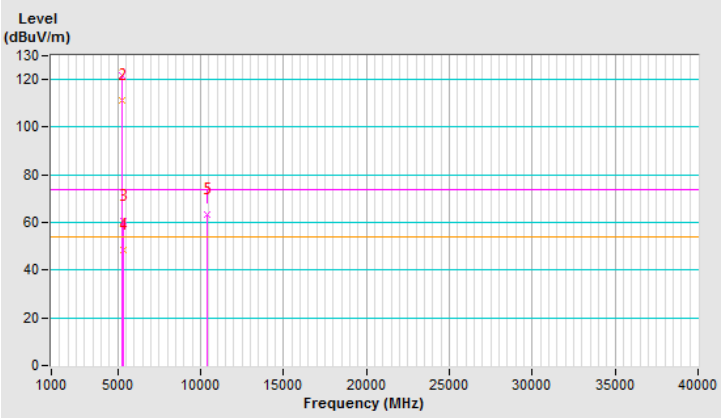


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA-MIMO
基 本 波 頻 率 ：	CH 48：5240 MHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	71%RH
測 試 日 期 ：	108 年 02 月 23 日	測 試 者 ：	張家誠

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5240.00	118.5 PK			3.88 V	49	77.3	41.2
2	*5240.00	108.5 AV			3.88 V	49	67.3	41.2
3	5350.00	60.3 PK	74.0	-13.7	3.53 V	28	47.9	12.4
4	5350.00	46.9 AV	54.0	-7.1	3.53 V	28	34.5	12.4
5	#10400.00	63.1 PK	68.2	-5.1	2.35 V	296	40.2	22.9
6	#10480.00	-	-	-	-	-	-	-
7	15720.00	-	-	-	-	-	-	-
8	20960.00	-	-	-	-	-	-	-
9	#26200.00	-	-	-	-	-	-	-
10	31440.00	-	-	-	-	-	-	-
11	#36680.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

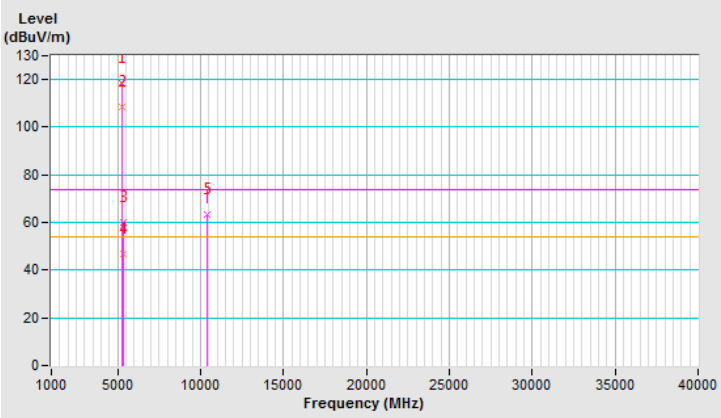


操作模式：	發射	調變技術：	OFDMA-MIMO
基本波頻率：	CH 149：5745 MHz	測試儀器：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量測場地溫度：	25℃	量測場地濕度：	70%RH
測試日期：	108 年 03 月 06 日	測試者：	張家誠

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5745.00	117.4 PK			1.00 H	336	74.9	42.5
2	*5745.00	107.8 AV			1.00 H	336	65.3	42.5
3	11490.00	64.2 PK	74.0	-9.8	1.02 H	230	40.1	24.1
4	11490.00	52.7 AV	54.0	-1.3	1.02 H	230	28.6	24.1
5	#17235.00	-	-	-	-	-	-	-
6	22980.00	-	-	-	-	-	-	-
7	#28725.00	-	-	-	-	-	-	-
8	#34470.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

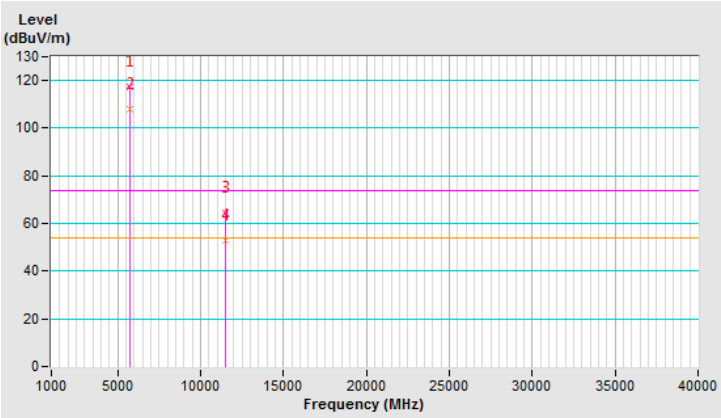


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA-MIMO
基 本 波 頻 率 ：	CH 149：5745 MHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 03 月 06 日	測 試 者 ：	張家誠

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5745.00	118.0 PK			3.89 V	20	75.5	42.5
2	*5745.00	107.6 AV			3.89 V	20	65.1	42.5
3	11490.00	62.7 PK	74.0	-11.3	2.95 V	117	38.6	24.1
4	11490.00	51.1 AV	54.0	-2.9	2.95 V	117	27.0	24.1
5	#17235.00	-	-	-	-	-	-	-
6	22980.00	-	-	-	-	-	-	-
7	#28725.00	-	-	-	-	-	-	-
8	#34470.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

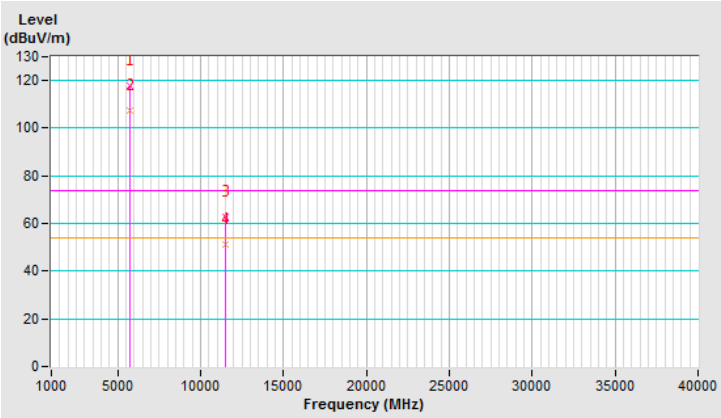


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA-MIMO
基 本 波 頻 率 ：	CH 149：5745 MHz (OOBE)	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 03 月 06 日	測 試 者 ：	張家誠

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5635.20	64.0 PK	68.2	-4.2	1.00 H	336	51.3	12.7
2	#5977.60	64.3 PK	68.2	-3.9	1.00 H	336	50.5	13.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

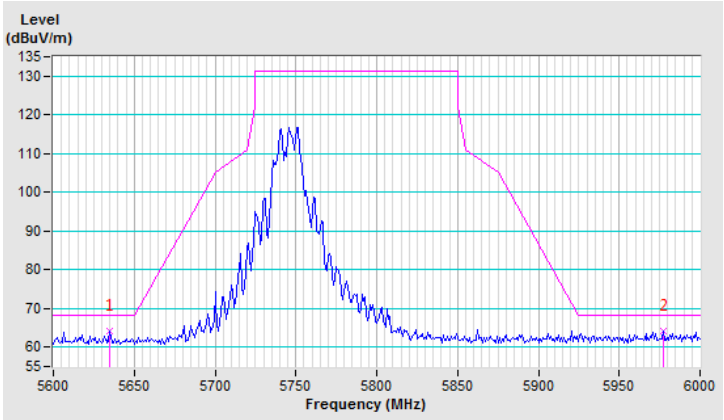


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA-MIMO
基 本 波 頻 率 ：	CH 149：5745 MHz (OOBE)	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 03 月 06 日	測 試 者 ：	張家誠

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5612.00	63.7 PK	68.2	-4.5	3.89 V	20	51.0	12.7
2	#5926.40	64.0 PK	68.2	-4.2	3.89 V	20	50.4	13.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

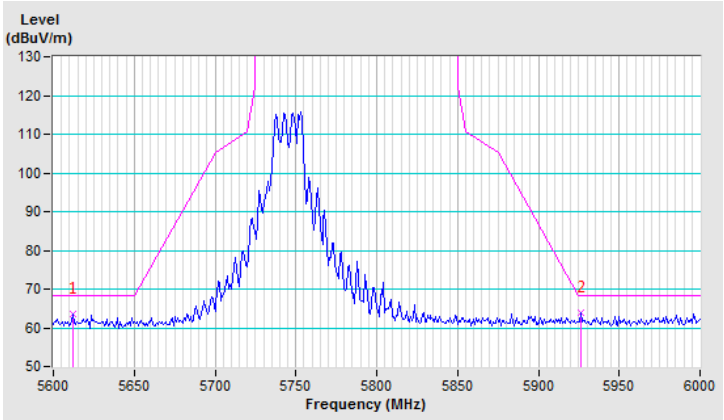


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA-MIMO
基 本 波 頻 率 ：	CH 157：5785 MHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 03 月 06 日	測 試 者 ：	張家誠

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5785.00	119.3 PK			1.00 H	337	76.7	42.6
2	*5785.00	110.2 AV			1.00 H	337	67.6	42.6
3	11570.00	64.3 PK	74.0	-9.7	1.00 H	267	40.3	24.0
4	11570.00	52.6 AV	54.0	-1.4	1.00 H	267	28.6	24.0
5	#17355.00	-	-	-	-	-	-	-
6	#23140.00	-	-	-	-	-	-	-
7	#28925.00	-	-	-	-	-	-	-
8	#34710.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

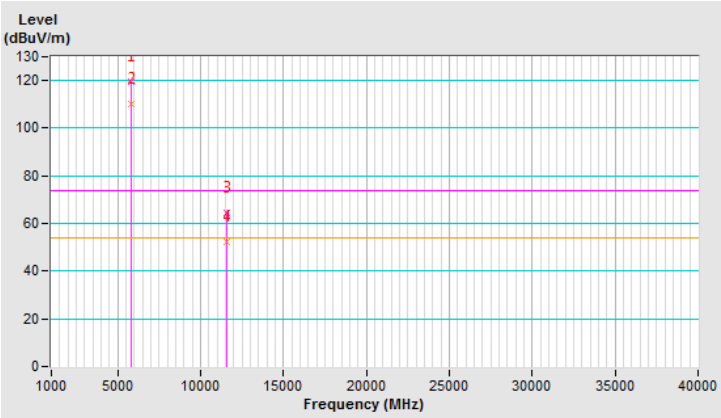


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA-MIMO
基 本 波 頻 率 ：	CH 157：5785 MHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 03 月 06 日	測 試 者 ：	張家誠

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5785.00	118.7 PK			3.88 V	19	76.1	42.6
2	*5785.00	108.6 AV			3.88 V	19	66.0	42.6
3	11570.00	62.9 PK	74.0	-11.1	1.64 V	250	38.9	24.0
4	11570.00	51.3 AV	54.0	-2.7	1.64 V	250	27.3	24.0
5	#17355.00	-	-	-	-	-	-	-
6	#23140.00	-	-	-	-	-	-	-
7	#28925.00	-	-	-	-	-	-	-
8	#34710.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

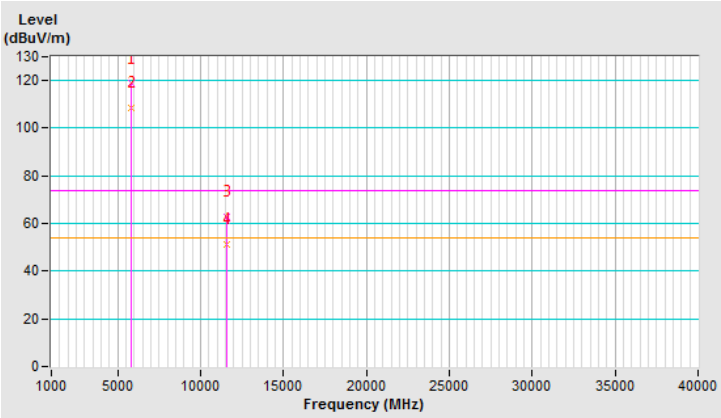


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA-MIMO
基 本 波 頻 率 ：	CH 157：5785 MHz (OOBE)	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 03 月 06 日	測 試 者 ：	張家誠

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5648.00	63.3 PK	68.2	-4.9	1.00 H	337	50.7	12.6
2	#5929.60	64.3 PK	68.2	-3.9	1.00 H	337	50.7	13.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

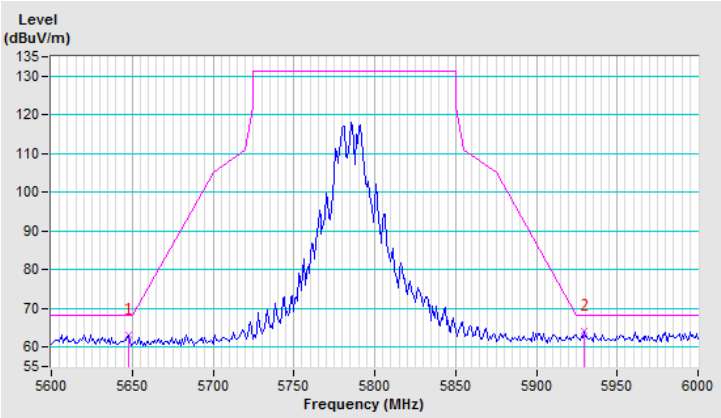


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA-MIMO
基 本 波 頻 率 ：	CH 157：5785 MHz (OOBE)	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 03 月 06 日	測 試 者 ：	張家誠

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5606.40	62.9 PK	68.2	-5.3	3.88 V	19	50.3	12.6
2	#5961.60	64.7 PK	68.2	-3.5	3.88 V	19	51.0	13.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

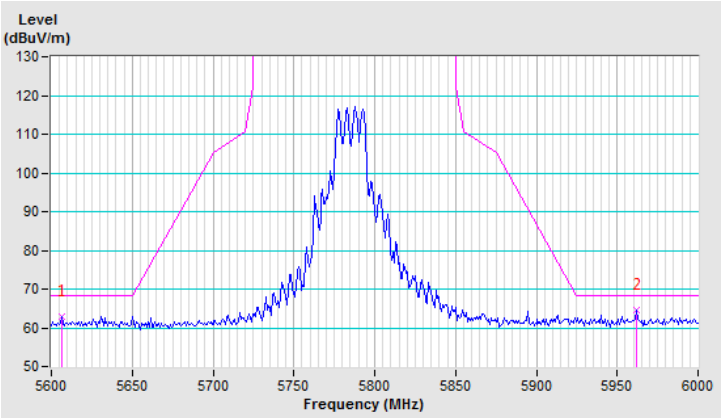


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA-MIMO
基 本 波 頻 率 ：	CH 165：5825 MHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 03 月 06 日	測 試 者 ：	張家誠

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5825.00	119.2 PK			1.00 H	334	76.6	42.6
2	*5825.00	108.7 AV			1.00 H	334	66.1	42.6
3	11650.00	64.1 PK	74.0	-9.9	1.09 H	217	40.5	23.6
4	11650.00	52.8 AV	54.0	-1.2	1.09 H	217	29.2	23.6
5	#17475.00	-	-	-	-	-	-	-
6	#23300.00	-	-	-	-	-	-	-
7	#29125.00	-	-	-	-	-	-	-
8	#34950.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

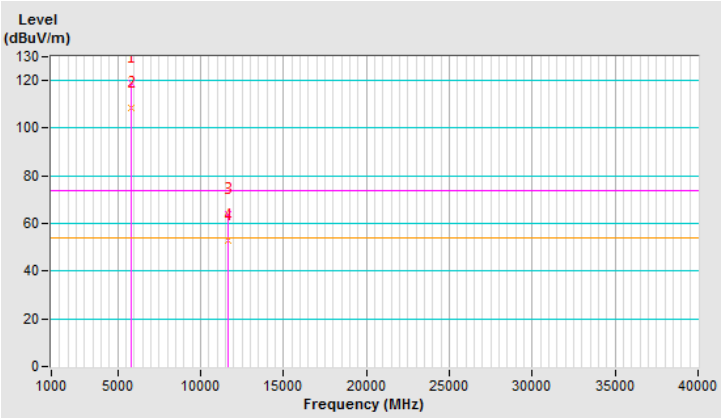


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA-MIMO
基 本 波 頻 率 ：	CH 165：5825 MHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 03 月 06 日	測 試 者 ：	張家誠

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5825.00	117.5 PK			3.89 V	22	74.9	42.6
2	*5825.00	107.2 AV			3.89 V	22	64.6	42.6
3	11650.00	62.5 PK	74.0	-11.5	2.61 V	174	38.9	23.6
4	11650.00	52.3 AV	54.0	-1.7	2.61 V	174	28.7	23.6
5	#17475.00	-	-	-	-	-	-	-
6	#23300.00	-	-	-	-	-	-	-
7	#29125.00	-	-	-	-	-	-	-
8	#34950.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

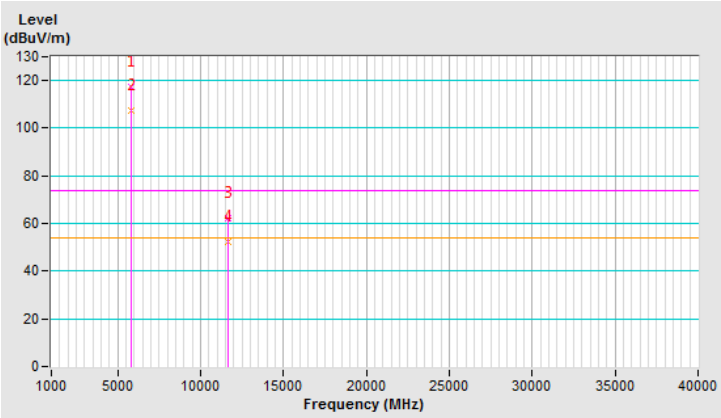


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA-MIMO
基 本 波 頻 率 ：	CH 165：5825 MHz (OOBE)	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 03 月 06 日	測 試 者 ：	張家誠

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5635.20	63.2 PK	68.2	-5.0	1.00 H	334	50.5	12.7
2	#5978.40	63.8 PK	68.2	-4.4	1.00 H	334	50.0	13.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

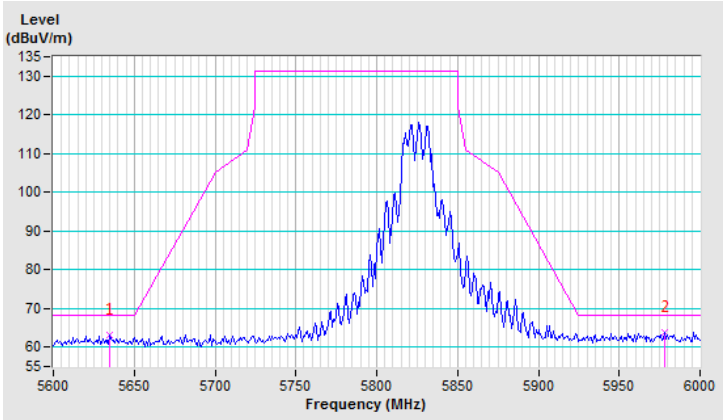


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA-MIMO
基 本 波 頻 率 ：	CH 165：5825 MHz (OOBE)	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 03 月 06 日	測 試 者 ：	張家誠

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5629.60	62.6 PK	68.2	-5.6	3.89 V	22	49.9	12.7
2	#5933.60	64.3 PK	68.2	-3.9	3.89 V	22	50.7	13.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

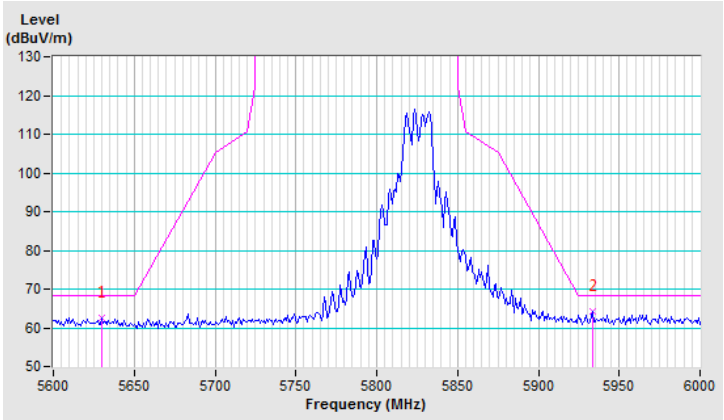

802.11ax (HE40)


操作模式：	發射	調變技術：	OFDMA-MIMO
基本波頻率：	CH 38：5190 MHz	測試儀器：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=3kHz
量測場地溫度：	25℃	量測場地濕度：	71%RH
測試日期：	108 年 02 月 23 日	測試者：	張家誠

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	71.3 PK	74.0	-2.7	1.17 H	72	58.7	12.6
2	5150.00	52.5 AV	54.0	-1.5	1.17 H	72	39.9	12.6
3	*5190.00	110.9 PK			1.17 H	55	69.4	41.5
4	*5190.00	100.7 AV			1.17 H	55	59.2	41.5
5	#10380.00	63.9 PK	68.2	-4.3	1.28 H	245	41.2	22.7
6	15570.00	-	-	-	-	-	-	-
7	20760.00	-	-	-	-	-	-	-
8	#25950.00	-	-	-	-	-	-	-
9	#31140.00	-	-	-	-	-	-	-
10	#36330.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

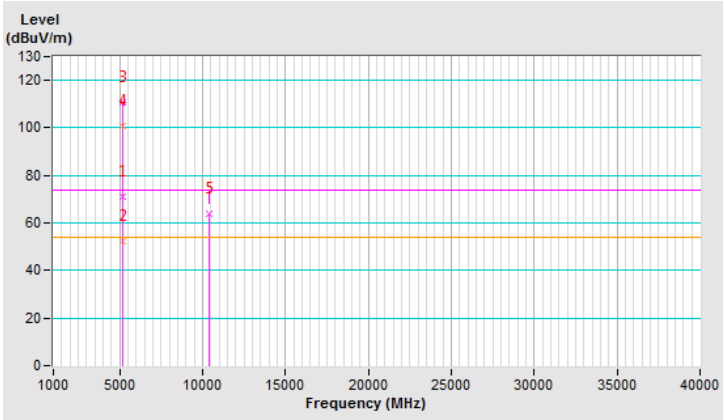


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA-MIMO
基 本 波 頻 率 ：	CH 38：5190 MHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=3kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	71%RH
測 試 日 期 ：	108 年 02 月 23 日	測 試 者 ：	張家誠

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	68.3 PK	74.0	-5.7	3.99 V	36	55.7	12.6
2	5150.00	49.5 AV	54.0	-4.5	3.99 V	36	36.9	12.6
3	*5190.00	106.9 PK			3.89 V	32	65.4	41.5
4	*5190.00	96.7 AV			3.89 V	32	55.2	41.5
5	#10380.00	63.5 PK	68.2	-4.7	2.55 V	216	40.8	22.7
6	15570.00	-	-	-	-	-	-	-
7	20760.00	-	-	-	-	-	-	-
8	#25950.00	-	-	-	-	-	-	-
9	#31140.00	-	-	-	-	-	-	-
10	#36330.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

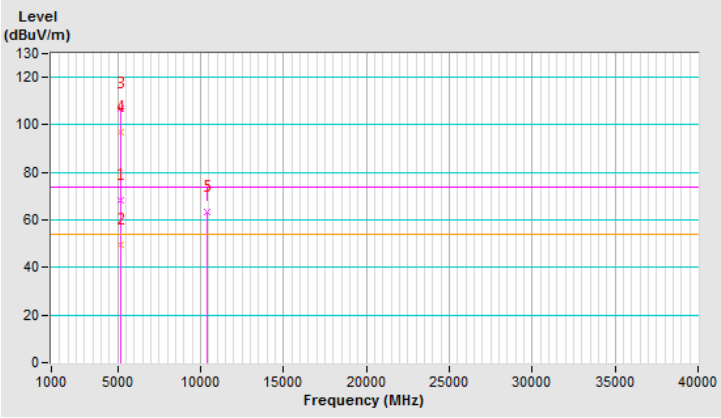


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA-MIMO
基 本 波 頻 率 ：	CH 46：5230 MHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=3kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	71%RH
測 試 日 期 ：	108 年 02 月 23 日	測 試 者 ：	張家誠

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	68.7 PK	74.0	-5.3	1.16 H	53	56.1	12.6
2	5150.00	52.8 AV	54.0	-1.2	1.16 H	53	40.2	12.6
3	*5230.00	116.1 PK			1.19 H	66	74.8	41.3
4	*5230.00	105.4 AV			1.19 H	66	64.1	41.3
5	5350.00	60.6 PK	74.0	-13.4	1.35 H	66	48.2	12.4
6	5350.00	47.9 AV	54.0	-6.1	1.35 H	66	35.5	12.4
7	#10460.00	63.1 PK	68.2	-5.1	1.85 H	263	40.2	22.9
8	15690.00	-	-	-	-	-	-	-
9	20920.00	-	-	-	-	-	-	-
10	#26150.00	-	-	-	-	-	-	-
11	31380.00	-	-	-	-	-	-	-
12	#36610.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

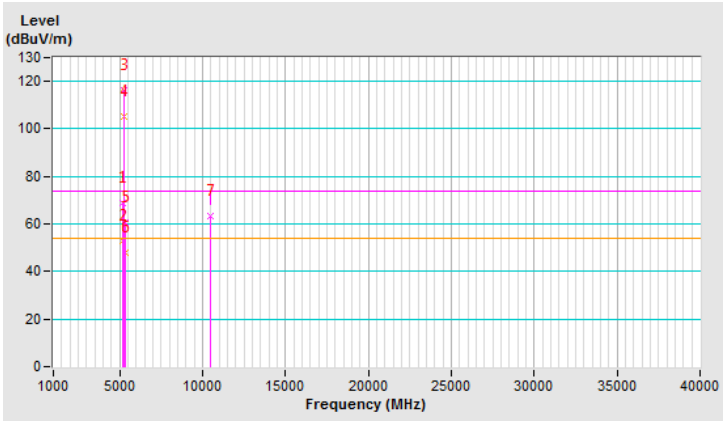


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA-MIMO
基 本 波 頻 率 ：	CH 46：5230 MHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=3kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	71%RH
測 試 日 期 ：	108 年 02 月 23 日	測 試 者 ：	張家誠

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	65.7 PK	74.0	-8.3	3.85 V	42	53.1	12.6
2	5150.00	49.7 AV	54.0	-4.3	3.85 V	42	37.1	12.6
3	*5230.00	112.1 PK			3.86 V	44	70.8	41.3
4	*5230.00	101.4 AV			3.86 V	44	60.1	41.3
5	5350.00	60.0 PK	74.0	-14.0	3.89 V	22	47.6	12.4
6	5350.00	47.6 AV	54.0	-6.4	3.89 V	22	35.2	12.4
7	#10460.00	62.5 PK	68.2	-5.7	2.65 V	244	39.6	22.9
8	15690.00	-	-	-	-	-	-	-
9	20920.00	-	-	-	-	-	-	-
10	#26150.00	-	-	-	-	-	-	-
11	31380.00	-	-	-	-	-	-	-
12	#36610.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

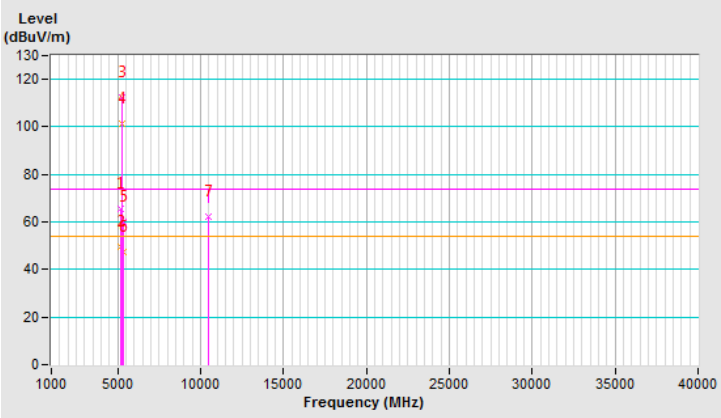


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA-MIMO
基 本 波 頻 率 ：	CH 151：5755 MHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=3kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 03 月 06 日	測 試 者 ：	張家誠

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5755.00	114.7 PK			1.00 H	336	72.2	42.5
2	*5755.00	104.8 AV			1.00 H	336	62.3	42.5
3	11510.00	64.0 PK	74.0	-10.0	1.70 H	225	40.1	23.9
4	11510.00	52.8 AV	54.0	-1.2	1.70 H	225	28.9	23.9
5	#17265.00	-	-	-	-	-	-	-
6	23020.00	-	-	-	-	-	-	-
7	#28775.00	-	-	-	-	-	-	-
8	#34530.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

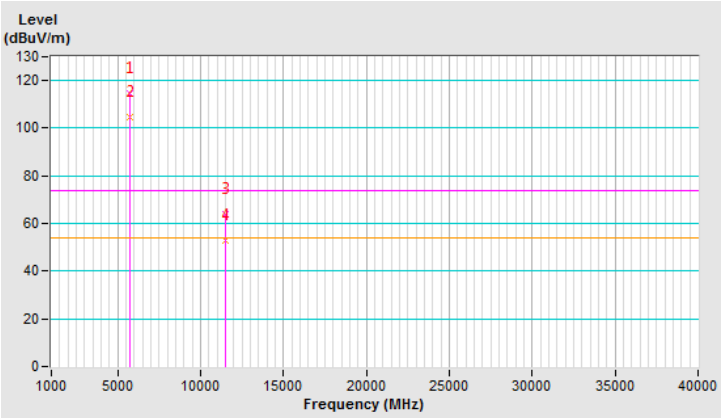


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA-MIMO
基 本 波 頻 率 ：	CH 151：5755 MHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=3kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 03 月 06 日	測 試 者 ：	張家誠

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5755.00	114.9 PK			3.85 V	24	72.4	42.5
2	*5755.00	104.5 AV			3.85 V	24	62.0	42.5
3	11510.00	63.0 PK	74.0	-11.0	2.21 V	140	39.1	23.9
4	11510.00	52.4 AV	54.0	-1.6	2.21 V	140	28.5	23.9
5	#17265.00	-	-	-	-	-	-	-
6	23020.00	-	-	-	-	-	-	-
7	#28775.00	-	-	-	-	-	-	-
8	#34530.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

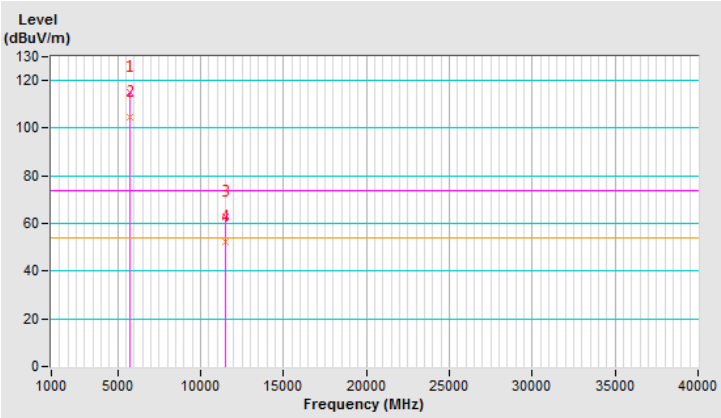


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA-MIMO
基 本 波 頻 率 ：	CH 151：5755 MHz (OOBE)	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=3kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 03 月 06 日	測 試 者 ：	張家誠

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5646.40	66.9 PK	68.2	-1.3	1.00 H	336	54.3	12.6
2	#5932.80	64.8 PK	68.2	-3.4	1.00 H	336	51.2	13.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

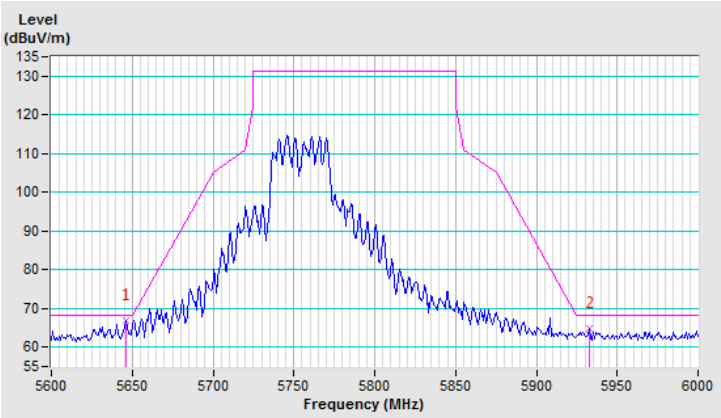


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA-MIMO
基 本 波 頻 率 ：	CH 151：5755 MHz (OOBE)	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=3kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 03 月 06 日	測 試 者 ：	張家誠

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5642.40	65.3 PK	68.2	-2.9	3.85 V	24	52.6	12.7
2	#5973.60	63.5 PK	68.2	-4.7	3.85 V	24	49.8	13.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

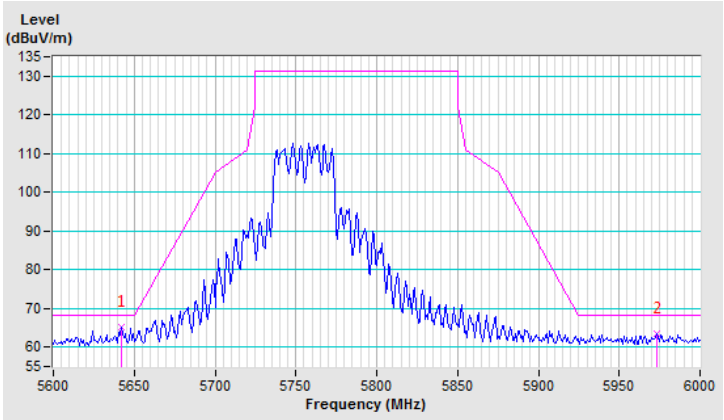


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA-MIMO
基 本 波 頻 率 ：	CH 159：5795 MHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=3kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 03 月 06 日	測 試 者 ：	張家誠

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5795.00	117.0 PK			1.00 H	339	74.4	42.6
2	*5795.00	106.7 AV			1.00 H	339	64.1	42.6
3	11590.00	64.0 PK	74.0	-10.0	1.32 H	228	40.2	23.8
4	11590.00	52.7 AV	54.0	-1.3	1.32 H	228	28.9	23.8
5	#17385.00	-	-	-	-	-	-	-
6	#23180.00	-	-	-	-	-	-	-
7	#28975.00	-	-	-	-	-	-	-
8	#34770.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

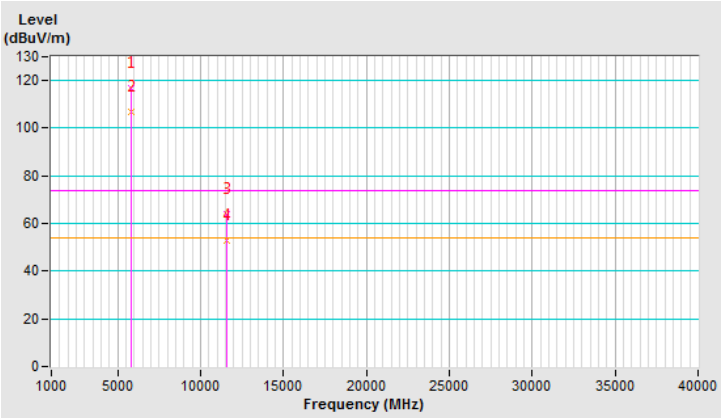


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA-MIMO
基 本 波 頻 率 ：	CH 159：5795 MHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=3kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 03 月 06 日	測 試 者 ：	張家誠

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5795.00	115.2 PK			3.90 V	23	72.6	42.6
2	*5795.00	104.6 AV			3.90 V	23	62.0	42.6
3	11590.00	62.5 PK	74.0	-11.5	2.69 V	220	38.7	23.8
4	11590.00	51.8 AV	54.0	-2.2	2.69 V	220	28.0	23.8
5	#17385.00	-	-	-	-	-	-	-
6	#23180.00	-	-	-	-	-	-	-
7	#28975.00	-	-	-	-	-	-	-
8	#34770.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

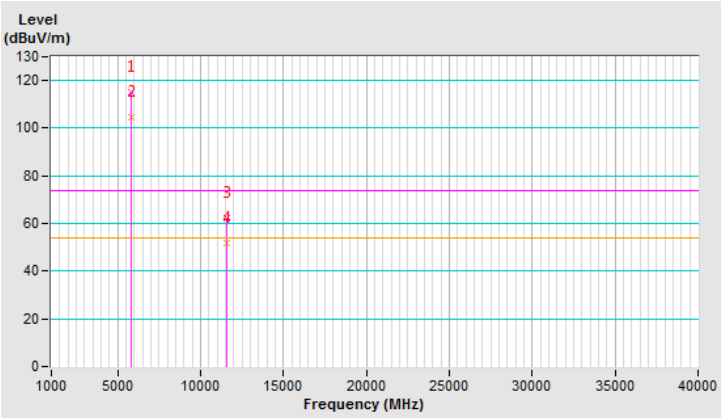


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA-MIMO
基 本 波 頻 率 ：	CH 159：5795 MHz (OOBE)	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=3kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 03 月 06 日	測 試 者 ：	張家誠

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5649.60	63.9 PK	68.2	-4.3	1.00 H	339	51.3	12.6
2	#5930.40	66.4 PK	68.2	-1.8	1.00 H	339	52.8	13.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

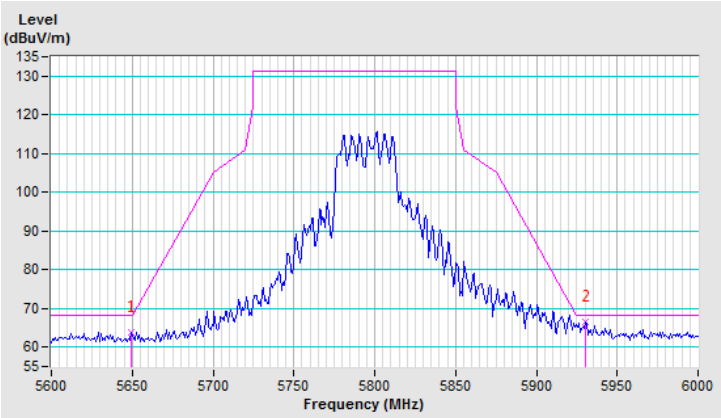


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA-MIMO
基 本 波 頻 率 ：	CH 159：5795 MHz (OOBE)	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=3kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 03 月 06 日	測 試 者 ：	張家誠

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5621.60	63.8 PK	68.2	-4.4	3.90 V	23	51.1	12.7
2	#5928.00	64.4 PK	68.2	-3.8	3.90 V	23	50.8	13.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

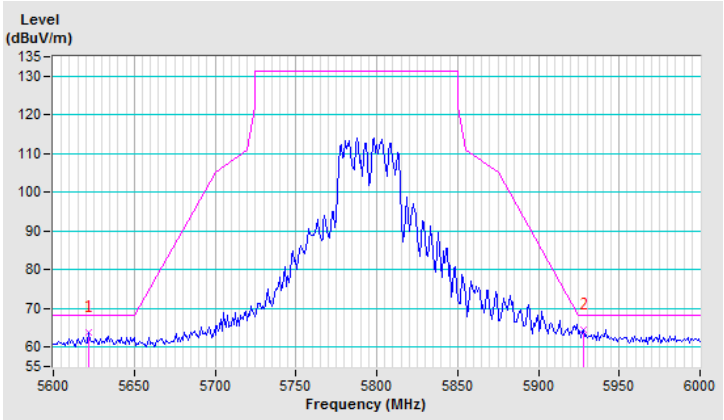


802.11ax (HE80)

操作模式：	發射	調變技術：	OFDMA-MIMO
基本波頻率：	CH 42：5210 MHz	測試儀器：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=3kHz
量測場地溫度：	25℃	量測場地濕度：	71%RH
測試日期：	108 年 02 月 23 日	測試者：	張家誠

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	70.9 PK	74.0	-3.1	1.24 H	66	58.3	12.6
2	5150.00	52.5 AV	54.0	-1.5	1.24 H	66	39.9	12.6
3	*5210.00	107.1 PK			1.14 H	61	65.7	41.4
4	*5210.00	97.4 AV			1.14 H	61	56.0	41.4
5	5350.00	60.4 PK	74.0	-13.6	1.19 H	69	48.0	12.4
6	5350.00	47.9 AV	54.0	-6.1	1.19 H	69	35.5	12.4
7	#10420.00	63.1 PK	68.2	-5.1	2.65 H	214	40.3	22.8
8	15630.00	-	-	-	-	-	-	-
9	20840.00	-	-	-	-	-	-	-
10	#26050.00	-	-	-	-	-	-	-
11	31260.00	-	-	-	-	-	-	-
12	36470.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

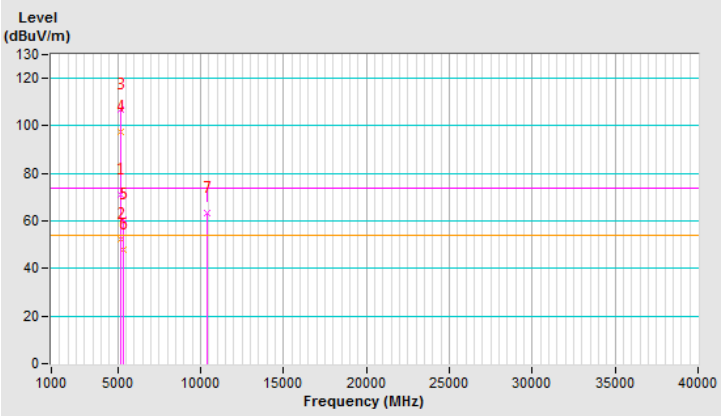


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA-MIMO
基 本 波 頻 率 ：	CH 42：5210 MHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=3kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	71%RH
測 試 日 期 ：	108 年 02 月 23 日	測 試 者 ：	張家誠

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	67.8 PK	74.0	-6.2	3.99 V	30	55.2	12.6
2	5150.00	49.4 AV	54.0	-4.6	3.99 V	30	36.8	12.6
3	*5210.00	103.5 PK			3.96 V	32	62.1	41.4
4	*5210.00	93.3 AV			3.96 V	32	51.9	41.4
5	5350.00	59.6 PK	74.0	-14.4	3.88 V	36	47.2	12.4
6	5350.00	47.0 AV	54.0	-7.0	3.88 V	36	34.6	12.4
7	#10420.00	62.6 PK	68.2	-5.6	2.66 V	214	39.8	22.8
8	15630.00	-	-	-	-	-	-	-
9	20840.00	-	-	-	-	-	-	-
10	#26050.00	-	-	-	-	-	-	-
11	31260.00	-	-	-	-	-	-	-
12	36470.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

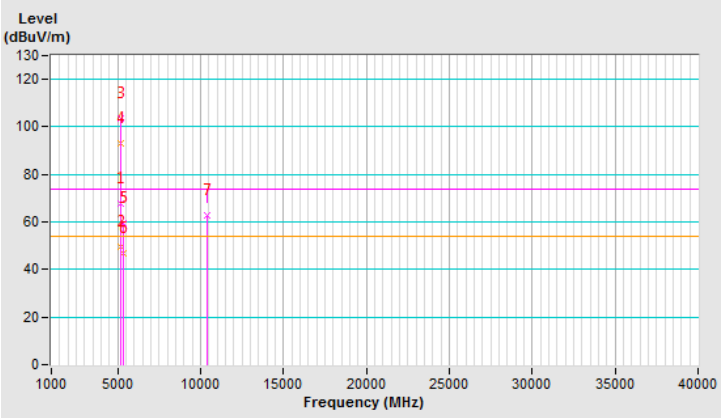


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA-MIMO
基 本 波 頻 率 ：	CH 155：5775 MHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=3kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 03 月 06 日	測 試 者 ：	張家誠

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5775.00	110.5 PK			1.00 H	341	67.9	42.6
2	*5775.00	99.9 AV			1.00 H	341	57.3	42.6
3	11550.00	63.6 PK	74.0	-10.4	1.66 H	245	39.7	23.9
4	11550.00	51.0 AV	54.0	-3.0	1.66 H	245	27.1	23.9
5	#17325.00	-	-	-	-	-	-	-
6	23100.00	-	-	-	-	-	-	-
7	#28875.00	-	-	-	-	-	-	-
8	#34650.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

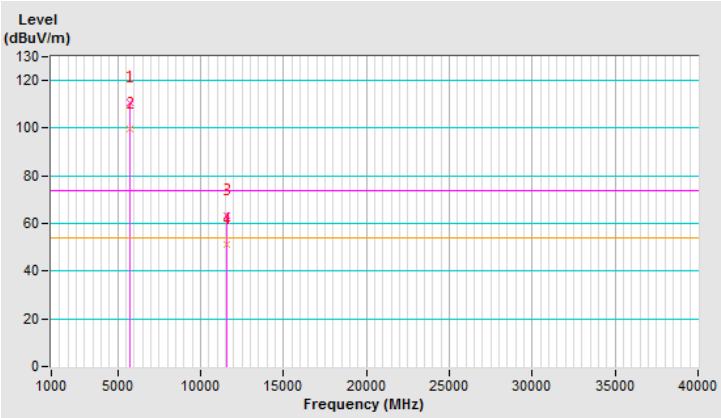


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA-MIMO
基 本 波 頻 率 ：	CH 155：5775 MHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=3kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 03 月 06 日	測 試 者 ：	張家誠

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5775.00	109.3 PK			3.89 V	24	66.7	42.6
2	*5775.00	99.2 AV			3.89 V	24	56.6	42.6
3	11550.00	62.8 PK	74.0	-11.2	3.01 V	114	38.9	23.9
4	11550.00	51.1 AV	54.0	-2.9	3.01 V	114	27.2	23.9
5	#17325.00	-	-	-	-	-	-	-
6	23100.00	-	-	-	-	-	-	-
7	#28875.00	-	-	-	-	-	-	-
8	#34650.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

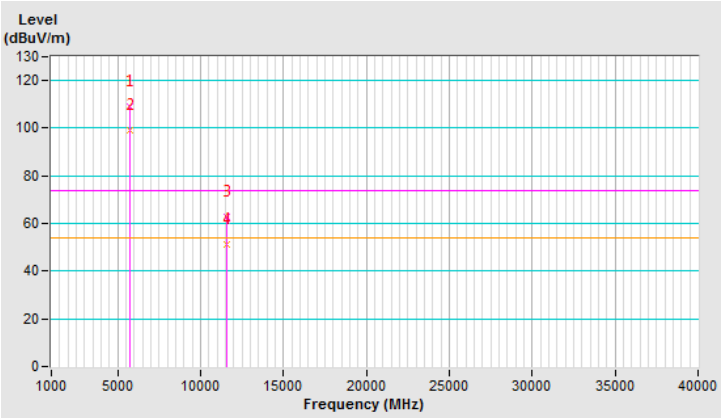


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA-MIMO
基 本 波 頻 率 ：	CH 155：5775 MHz (OOBE)	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=3kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 03 月 06 日	測 試 者 ：	張家誠

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5645.60	64.7 PK	68.2	-3.5	1.00 H	341	52.1	12.6
2	#5927.20	67.0 PK	68.2	-1.2	1.00 H	341	53.4	13.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

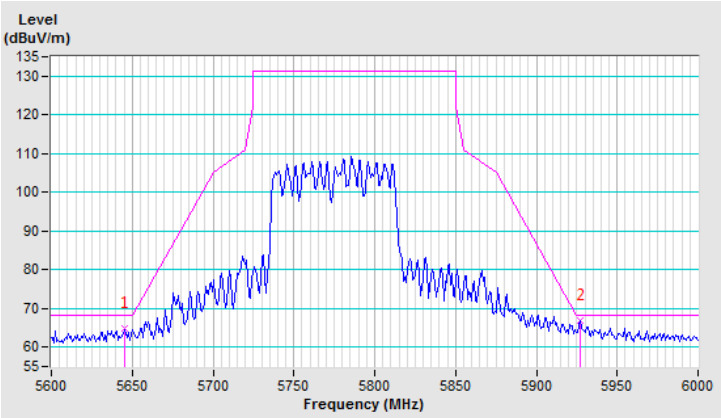


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA-MIMO
基 本 波 頻 率 ：	CH 155：5775 MHz (OOBE)	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=3kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 03 月 06 日	測 試 者 ：	張家誠

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5644.00	64.7 PK	68.2	-3.5	3.89 V	24	52.0	12.7
2	#5928.80	65.1 PK	68.2	-3.1	3.89 V	24	51.5	13.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

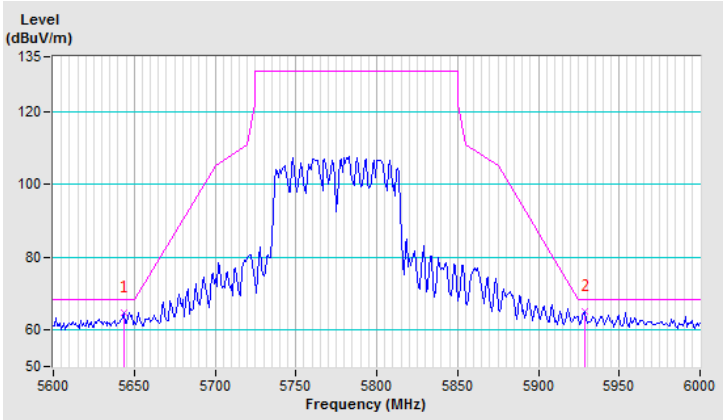

Test Mode I - AP43E (External antenna - PN: ATS-OO-245-46-4RPSP-36) + Eth7 Radio + POE

1TX


802.11a

操作模式：	發射	調變技術：	OFDM
基本波頻率：	CH 36：5180 MHz	測試儀器：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量測場地溫度：	25℃	量測場地濕度：	68%RH
測試日期：	108 年 05 月 16 日	測試者：	鄭詠璋

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	70.0 PK	74.0	-4.0	1.72 H	318	65.6	4.4
2	5150.00	52.6 AV	54.0	-1.4	1.72 H	318	48.2	4.4
3	*5180.00	111.1 PK			1.69 H	312	71.6	39.5
4	*5180.00	100.9 AV			1.69 H	312	61.4	39.5
5	#10360.00	57.6 PK	68.2	-10.6	1.96 H	251	41.6	16.0
6	15540.00	-	-	-	-	-	-	-
7	20720.00	-	-	-	-	-	-	-
8	#25900.00	-	-	-	-	-	-	-
9	#31080.00	-	-	-	-	-	-	-
10	#36260.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

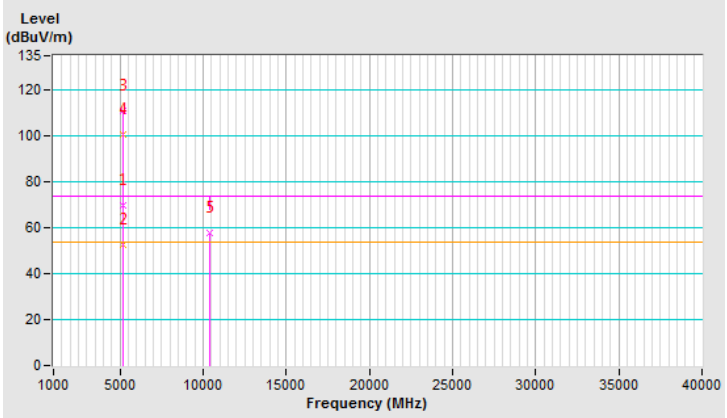


操 作 模 式 ：	發射	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 36：5180 MHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	68%RH
測 試 日 期 ：	108 年 05 月 16 日	測 試 者 ：	鄭詠璋

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	61.8 PK	74.0	-12.2	2.18 V	332	57.4	4.4
2	5150.00	45.9 AV	54.0	-8.1	2.18 V	332	41.5	4.4
3	*5180.00	104.2 PK			2.43 V	352	64.7	39.5
4	*5180.00	94.3 AV			2.43 V	352	54.8	39.5
5	#10360.00	58.0 PK	68.2	-10.2	1.42 V	291	42.0	16.0
6	15540.00	-	-	-	-	-	-	-
7	20720.00	-	-	-	-	-	-	-
8	#25900.00	-	-	-	-	-	-	-
9	#31080.00	-	-	-	-	-	-	-
10	#36260.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

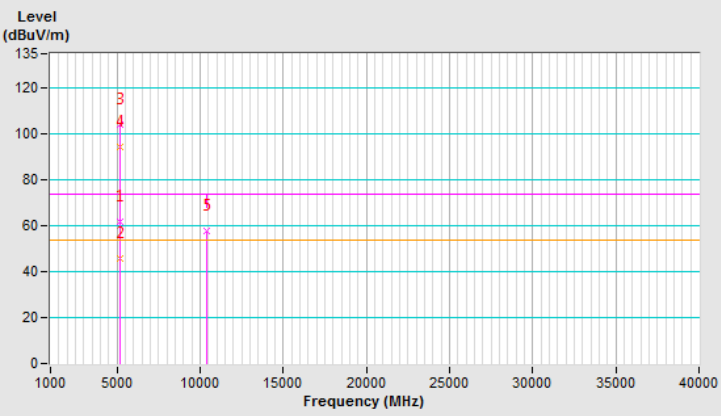


操 作 模 式 ：	發射	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 40：5200 MHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	68%RH
測 試 日 期 ：	108 年 05 月 16 日	測 試 者 ：	鄭詠璋

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5200.00	113.6 PK			1.64 H	313	74.1	39.5
2	*5200.00	103.4 AV			1.64 H	313	63.9	39.5
3	#10400.00	57.8 PK	68.2	-10.4	2.83 H	155	41.6	16.2
4	15600.00	-	-	-	-	-	-	-
5	20800.00	-	-	-	-	-	-	-
6	#26000.00	-	-	-	-	-	-	-
7	31200.00	-	-	-	-	-	-	-
8	#36400.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

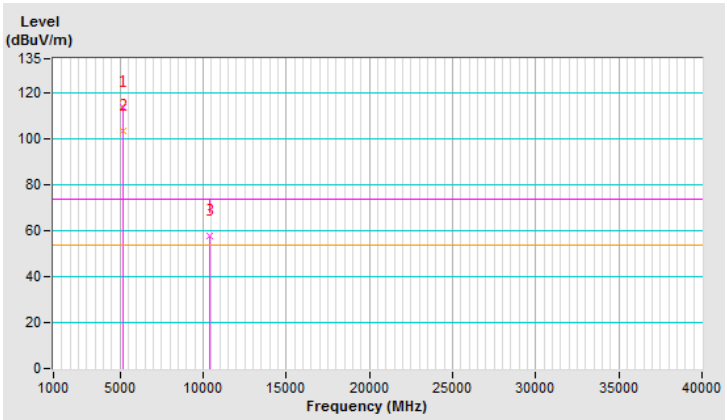


操 作 模 式 ：	發射	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 40：5200 MHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	68%RH
測 試 日 期 ：	108 年 05 月 16 日	測 試 者 ：	鄭詠璋

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5200.00	105.2 PK			2.42 V	278	65.7	39.5
2	*5200.00	95.0 AV			2.42 V	278	55.5	39.5
3	#10400.00	57.4 PK	68.2	-10.8	2.88 V	206	41.2	16.2
4	15600.00	-	-	-	-	-	-	-
5	20800.00	-	-	-	-	-	-	-
6	#26000.00	-	-	-	-	-	-	-
7	31200.00	-	-	-	-	-	-	-
8	#36400.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

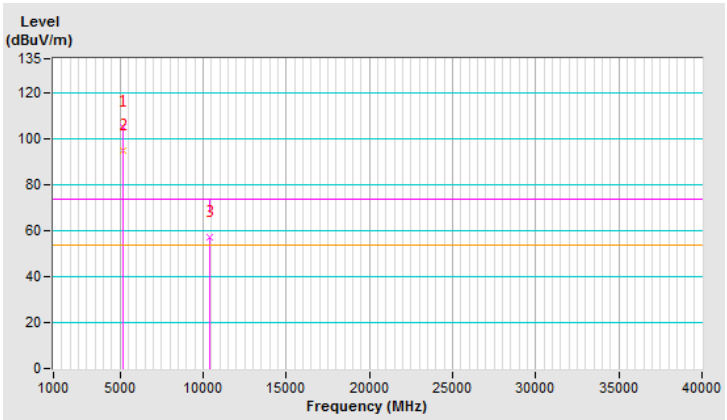


操 作 模 式 ：	發射	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 48：5240 MHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	68%RH
測 試 日 期 ：	108 年 05 月 16 日	測 試 者 ：	鄭詠璋

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5240.00	112.7 PK			1.59 H	319	73.4	39.3
2	*5240.00	102.5 AV			1.59 H	319	63.2	39.3
3	5350.00	57.6 PK	74.0	-16.4	1.65 H	326	53.3	4.3
4	5350.00	44.1 AV	54.0	-9.9	1.65 H	326	39.8	4.3
5	#10480.00	58.3 PK	68.2	-9.9	2.38 H	229	41.3	17.0
6	15720.00	-	-	-	-	-	-	-
7	20960.00	-	-	-	-	-	-	-
8	#26200.00	-	-	-	-	-	-	-
9	31440.00	-	-	-	-	-	-	-
10	#36680.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

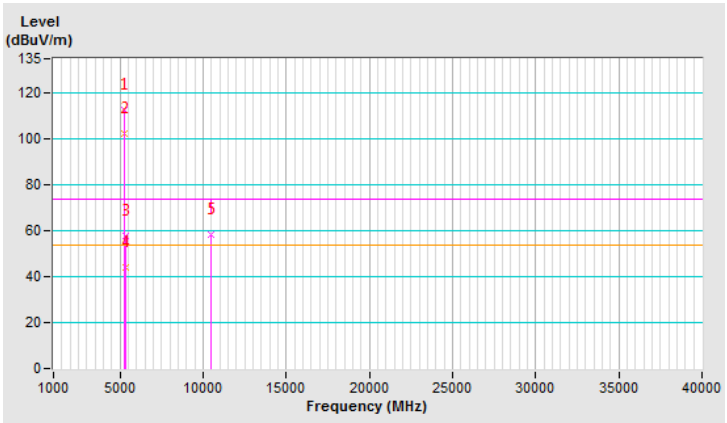


操作模式：	發射	調變技術：	OFDM
基本波頻率：	CH 48：5240 MHz	測試儀器：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量測場地溫度：	25℃	量測場地濕度：	68%RH
測試日期：	108 年 05 月 16 日	測試者：	鄭詠璋

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5240.00	109.4 PK			3.09 V	339	70.1	39.3
2	*5240.00	99.2 AV			3.09 V	339	59.9	39.3
3	5350.00	57.4 PK	74.0	-16.6	2.68 V	302	53.1	4.3
4	5350.00	43.6 AV	54.0	-10.4	2.68 V	302	39.3	4.3
5	#10480.00	58.8 PK	68.2	-9.4	2.75 V	233	41.8	17.0
6	15720.00	-	-	-	-	-	-	-
7	20960.00	-	-	-	-	-	-	-
8	#26200.00	-	-	-	-	-	-	-
9	31440.00	-	-	-	-	-	-	-
10	#36680.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

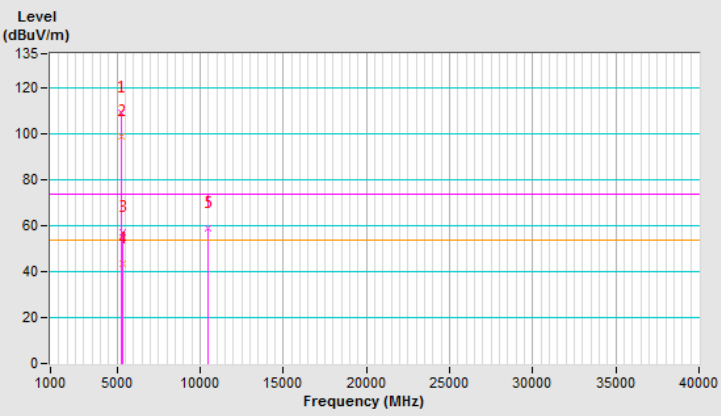


操 作 模 式 ：	發射	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 149：5745 MHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	24℃	量 測 場 地 濕 度 ：	69%RH
測 試 日 期 ：	108 年 05 月 20 日	測 試 者 ：	鄭詠璋

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5745.00	112.7 PK			1.90 H	306	72.6	40.1
2	*5745.00	102.3 AV			1.90 H	306	62.2	40.1
3	11490.00	58.3 PK	74.0	-15.7	2.58 H	149	40.3	18.0
4	11490.00	44.8 AV	54.0	-9.2	2.58 H	149	26.8	18.0
5	#17235.00	-	-	-	-	-	-	-
6	22980.00	-	-	-	-	-	-	-
7	#28725.00	-	-	-	-	-	-	-
8	#34470.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

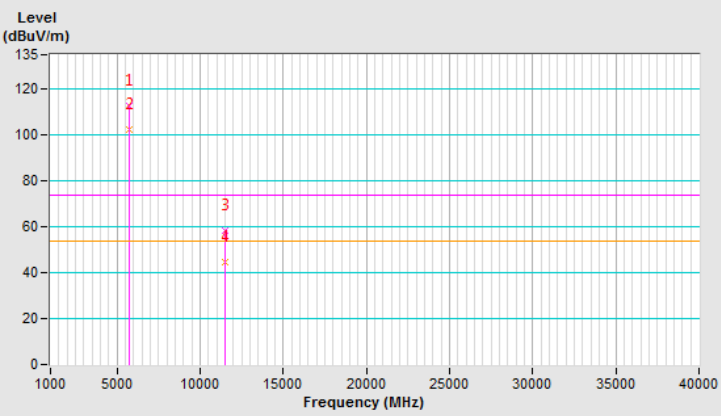


操 作 模 式 ：	發射	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 149：5745 MHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	24℃	量 測 場 地 濕 度 ：	69%RH
測 試 日 期 ：	108 年 05 月 20 日	測 試 者 ：	鄭詠璋

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5745.00	112.6 PK			3.34 V	14	72.5	40.1
2	*5745.00	102.2 AV			3.34 V	14	62.1	40.1
3	11490.00	59.4 PK	74.0	-14.6	1.57 V	282	41.4	18.0
4	11490.00	46.3 AV	54.0	-7.7	1.57 V	282	28.3	18.0
5	#17235.00	-	-	-	-	-	-	-
6	22980.00	-	-	-	-	-	-	-
7	#28725.00	-	-	-	-	-	-	-
8	#34470.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

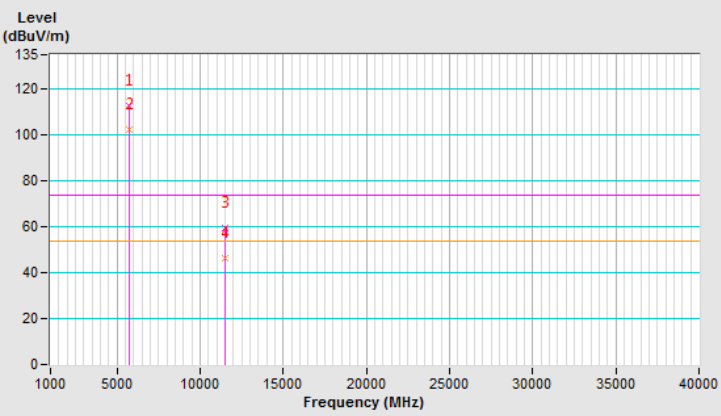


操 作 模 式 ：	發射	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 149：5745 MHz (OOBE)	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	24℃	量 測 場 地 濕 度 ：	69%RH
測 試 日 期 ：	108 年 05 月 20 日	測 試 者 ：	鄭詠璋

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5601.28	55.1 PK	68.2	-13.1	1.90 H	306	50.5	4.6
2	#5978.21	58.4 PK	68.2	-9.8	1.90 H	306	53.0	5.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

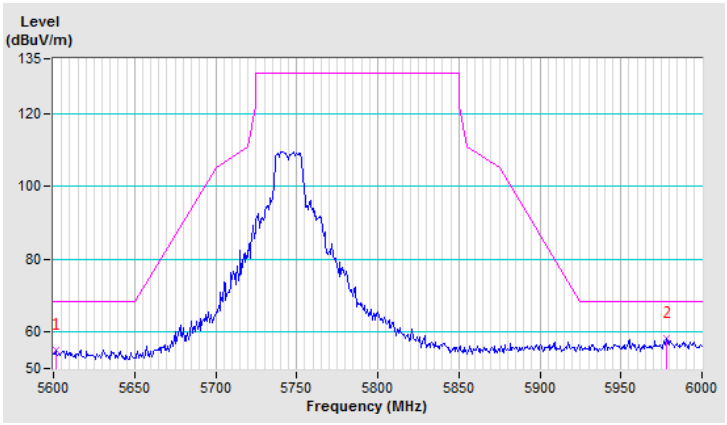


操 作 模 式 ：	發射	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 149：5745 MHz (OOBE)	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	24℃	量 測 場 地 濕 度 ：	69%RH
測 試 日 期 ：	108 年 05 月 20 日	測 試 者 ：	鄭詠璋

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5630.77	55.1 PK	68.2	-13.1	3.34 V	14	50.6	4.5
2	#5937.82	57.7 PK	68.2	-10.5	3.34 V	14	52.4	5.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

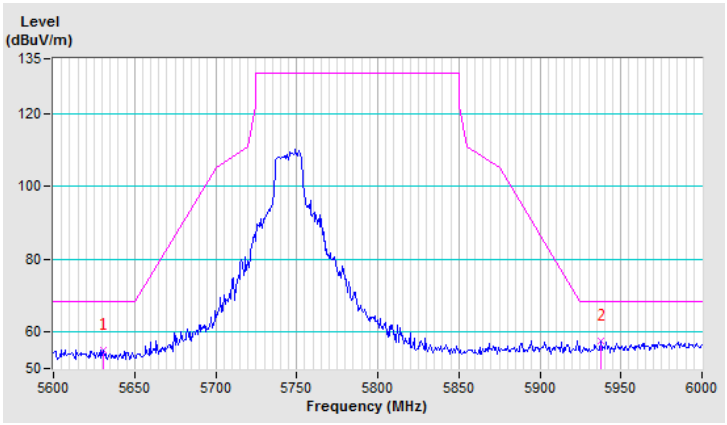


操 作 模 式 ：	發射	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 157：5785 MHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	24℃	量 測 場 地 濕 度 ：	69%RH
測 試 日 期 ：	108 年 05 月 20 日	測 試 者 ：	鄭詠璋

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5785.00	112.7 PK			1.50 H	304	72.4	40.3
2	*5785.00	102.7 AV			1.50 H	304	62.4	40.3
3	11570.00	59.0 PK	74.0	-15.0	2.28 H	136	41.3	17.7
4	11570.00	44.3 AV	54.0	-9.7	2.28 H	136	26.6	17.7
5	#17355.00	-	-	-	-	-	-	-
6	#23140.00	-	-	-	-	-	-	-
7	#28925.00	-	-	-	-	-	-	-
8	#34710.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

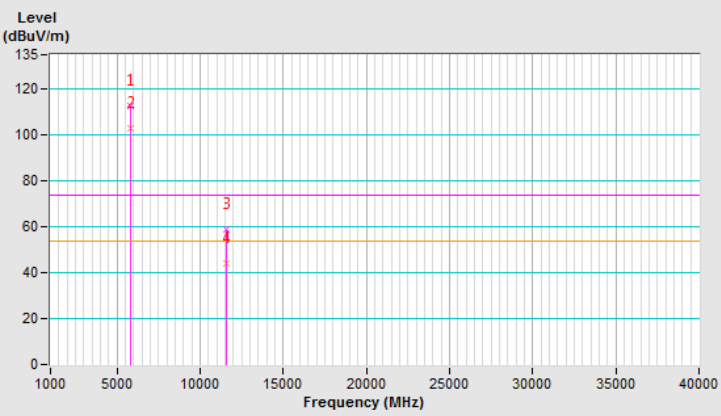


操 作 模 式 ：	發射	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 157：5785 MHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	24℃	量 測 場 地 濕 度 ：	69%RH
測 試 日 期 ：	108 年 05 月 20 日	測 試 者 ：	鄭詠璋

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5785.00	112.5 PK			3.30 V	11	72.2	40.3
2	*5785.00	102.2 AV			3.30 V	11	61.9	40.3
3	11570.00	59.2 PK	74.0	-14.8	1.68 V	174	41.5	17.7
4	11570.00	45.7 AV	54.0	-8.3	1.68 V	174	28.0	17.7
5	#17355.00	-	-	-	-	-	-	-
6	#23140.00	-	-	-	-	-	-	-
7	#28925.00	-	-	-	-	-	-	-
8	#34710.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

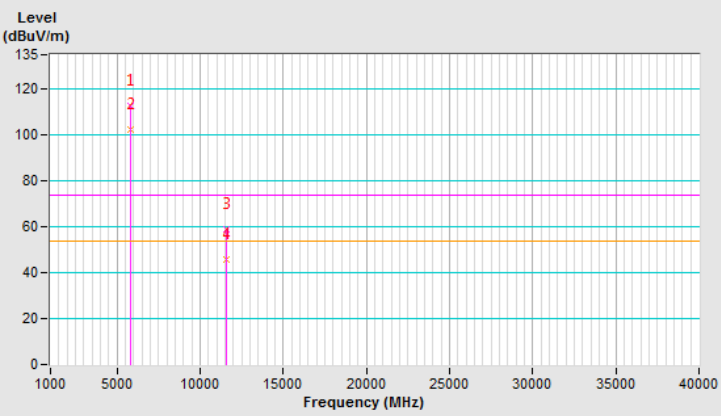


操 作 模 式 ：	發射	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 157：5785 MHz (OOBE)	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	24℃	量 測 場 地 濕 度 ：	69%RH
測 試 日 期 ：	108 年 05 月 20 日	測 試 者 ：	鄭詠璋

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5614.74	55.4 PK	68.2	-12.8	1.50 H	304	50.8	4.6
2	#5928.85	57.7 PK	68.2	-10.5	1.50 H	304	52.4	5.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

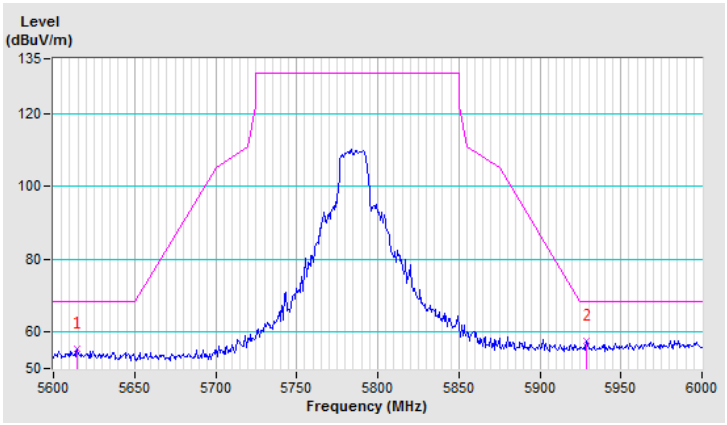


操 作 模 式 ：	發射	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 157：5785 MHz (OOBE)	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	24℃	量 測 場 地 濕 度 ：	69%RH
測 試 日 期 ：	108 年 05 月 20 日	測 試 者 ：	鄭詠璋

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5603.21	55.7 PK	68.2	-12.5	3.30 V	11	51.1	4.6
2	#5987.18	58.8 PK	68.2	-9.4	3.30 V	11	53.4	5.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

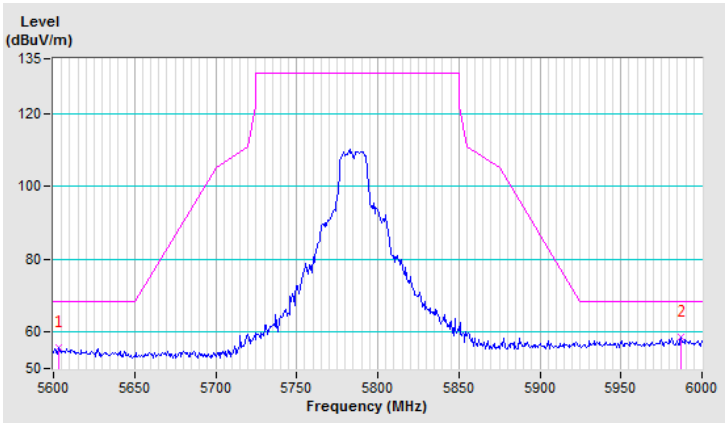


操 作 模 式 ：	發射	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 165：5825 MHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	24℃	量 測 場 地 濕 度 ：	69%RH
測 試 日 期 ：	108 年 05 月 20 日	測 試 者 ：	鄭詠璋

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5825.00	114.3 PK			1.67 H	304	73.9	40.4
2	*5825.00	103.8 AV			1.67 H	304	63.4	40.4
3	11650.00	59.8 PK	74.0	-14.2	1.48 H	251	42.3	17.5
4	11650.00	46.0 AV	54.0	-8.0	1.48 H	251	28.5	17.5
5	#17475.00	-	-	-	-	-	-	-
6	#23300.00	-	-	-	-	-	-	-
7	#29125.00	-	-	-	-	-	-	-
8	#34950.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

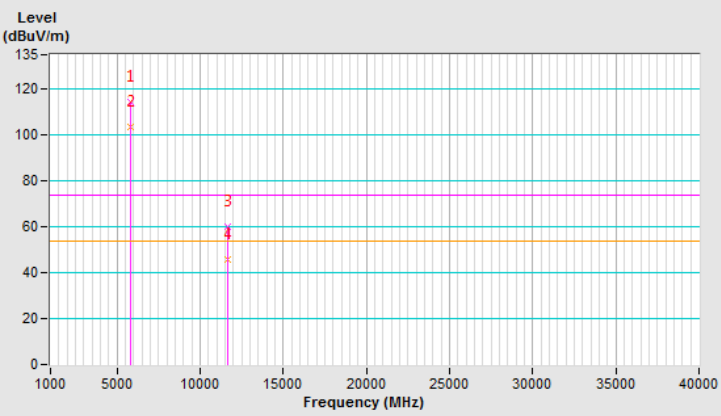


操 作 模 式 ：	發射	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 165：5825 MHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	24℃	量 測 場 地 濕 度 ：	69%RH
測 試 日 期 ：	108 年 05 月 20 日	測 試 者 ：	鄭詠璋

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5825.00	114.4 PK			3.42 V	9	74.0	40.4
2	*5825.00	104.2 AV			3.42 V	9	63.8	40.4
3	11650.00	59.0 PK	74.0	-15.0	2.10 V	199	41.5	17.5
4	11650.00	45.8 AV	54.0	-8.2	2.10 V	199	28.3	17.5
5	#17475.00	-	-	-	-	-	-	-
6	#23300.00	-	-	-	-	-	-	-
7	#29125.00	-	-	-	-	-	-	-
8	#34950.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

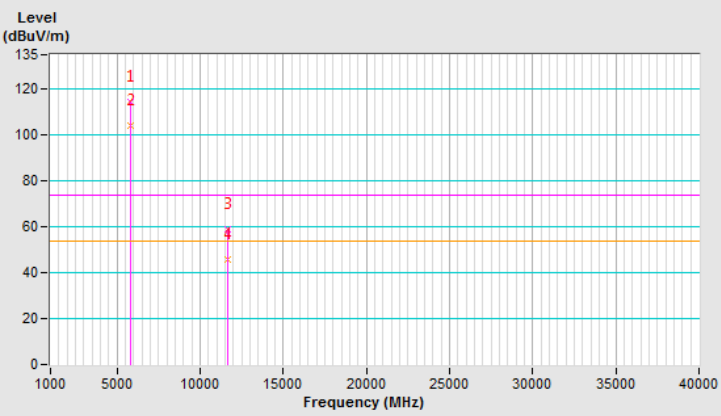


操 作 模 式 ：	發射	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 165：5825 MHz (OOBE)	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	24℃	量 測 場 地 濕 度 ：	69%RH
測 試 日 期 ：	108 年 05 月 20 日	測 試 者 ：	鄭詠璋

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5608.97	56.2 PK	68.2	-12.0	1.67 H	304	51.6	4.6
2	#5936.54	58.3 PK	68.2	-9.9	1.67 H	304	53.0	5.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

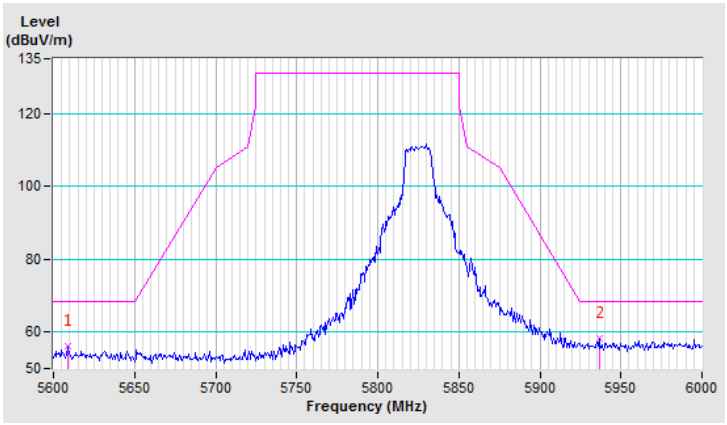


操 作 模 式 ：	發射	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 165：5825 MHz (OOBE)	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	24℃	量 測 場 地 濕 度 ：	69%RH
測 試 日 期 ：	108 年 05 月 20 日	測 試 者 ：	鄭詠璋

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5609.62	55.6 PK	68.2	-12.6	3.42 V	9	51.0	4.6
2	#5989.74	57.7 PK	68.2	-10.5	3.42 V	9	52.3	5.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

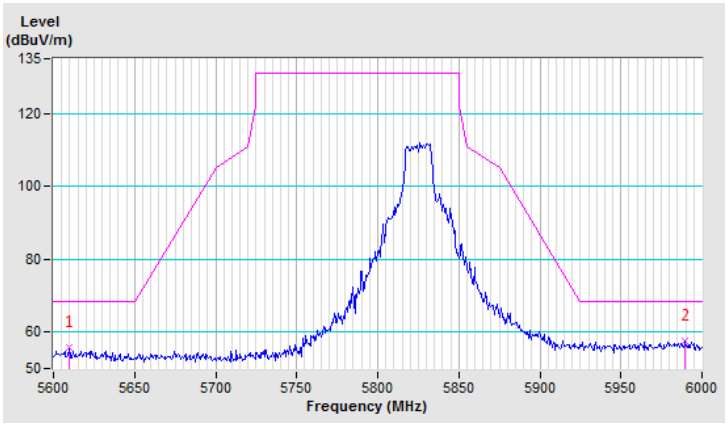


802.11ax (HE20)

操作模式：	發射	調變技術：	OFDMA
基本波頻率：	CH 36：5180 MHz	測試儀器：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量測場地溫度：	24℃	量測場地濕度：	69%RH
測試日期：	108 年 05 月 20 日	測試者：	鄭詠璋

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	68.0 PK	74.0	-6.0	1.58 H	322	63.6	4.4
2	5150.00	52.7 AV	54.0	-1.3	1.58 H	322	48.3	4.4
3	*5180.00	112.3 PK			1.42 H	322	72.8	39.5
4	*5180.00	98.8 AV			1.42 H	322	59.3	39.5
5	#10360.00	57.7 PK	68.2	-10.5	2.51 H	164	41.7	16.0
6	15540.00	-	-	-	-	-	-	-
7	20720.00	-	-	-	-	-	-	-
8	#25900.00	-	-	-	-	-	-	-
9	#31080.00	-	-	-	-	-	-	-
10	#36260.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

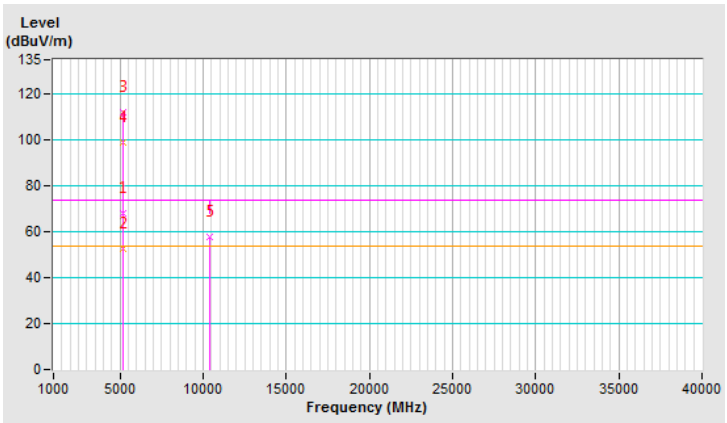


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 36：5180 MHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	24℃	量 測 場 地 濕 度 ：	69%RH
測 試 日 期 ：	108 年 05 月 20 日	測 試 者 ：	鄭詠璋

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	64.0 PK	74.0	-10.0	1.07 V	298	59.6	4.4
2	5150.00	48.6 AV	54.0	-5.4	1.07 V	298	44.2	4.4
3	*5180.00	105.2 PK			1.00 V	296	65.7	39.5
4	*5180.00	92.1 AV			1.00 V	296	52.6	39.5
5	#10360.00	57.9 PK	68.2	-10.3	1.84 V	241	41.9	16.0
6	15540.00	-	-	-	-	-	-	-
7	20720.00	-	-	-	-	-	-	-
8	#25900.00	-	-	-	-	-	-	-
9	#31080.00	-	-	-	-	-	-	-
10	#36260.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

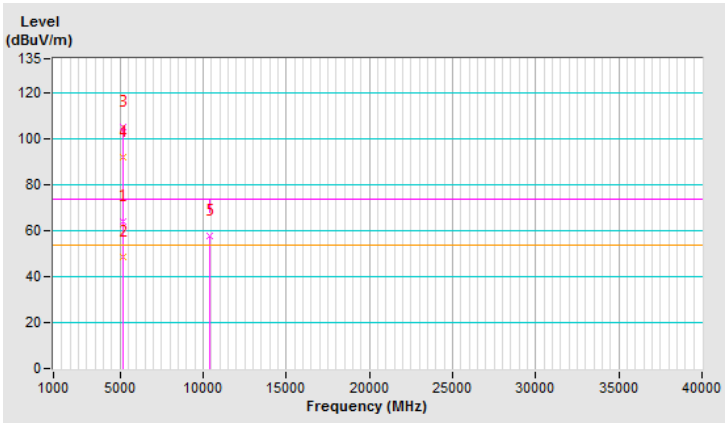


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 40：5200 MHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	24℃	量 測 場 地 濕 度 ：	69%RH
測 試 日 期 ：	108 年 05 月 20 日	測 試 者 ：	鄭詠璋

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	67.0 PK	74.0	-7.0	1.56 H	320	62.6	4.4
2	5150.00	50.7 AV	54.0	-3.3	1.56 H	320	46.3	4.4
3	*5200.00	115.8 PK			1.51 H	319	76.3	39.5
4	*5200.00	102.4 AV			1.51 H	319	62.9	39.5
5	#10400.00	58.0 PK	68.2	-10.2	1.72 H	213	41.8	16.2
6	15600.00	-	-	-	-	-	-	-
7	20800.00	-	-	-	-	-	-	-
8	#26000.00	-	-	-	-	-	-	-
9	31200.00	-	-	-	-	-	-	-
10	#36400.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

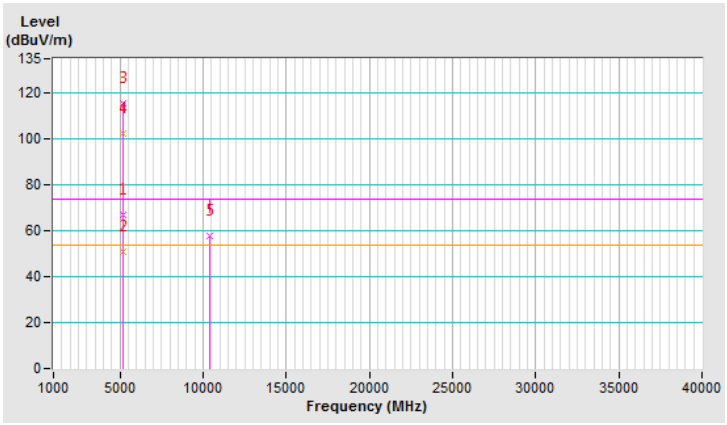


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 40：5200 MHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	24℃	量 測 場 地 濕 度 ：	69%RH
測 試 日 期 ：	108 年 05 月 20 日	測 試 者 ：	鄭詠璋

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	63.6 PK	74.0	-10.4	1.08 V	298	59.2	4.4
2	5150.00	47.6 AV	54.0	-6.4	1.08 V	298	43.2	4.4
3	*5200.00	108.4 PK			1.19 V	296	68.9	39.5
4	*5200.00	95.3 AV			1.19 V	296	55.8	39.5
5	#10400.00	57.8 PK	68.2	-10.4	2.13 V	199	41.6	16.2
6	15600.00	-	-	-	-	-	-	-
7	20800.00	-	-	-	-	-	-	-
8	#26000.00	-	-	-	-	-	-	-
9	31200.00	-	-	-	-	-	-	-
10	#36400.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

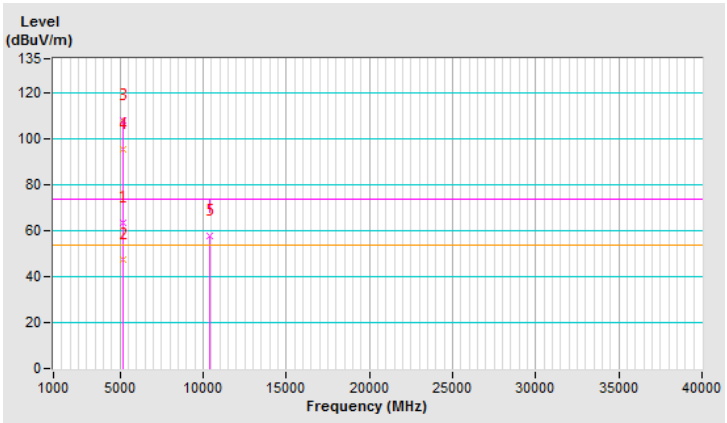


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 48：5240 MHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	24℃	量 測 場 地 濕 度 ：	69%RH
測 試 日 期 ：	108 年 05 月 20 日	測 試 者 ：	鄭詠璋

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5240.00	114.6 PK			1.70 H	315	75.3	39.3
2	*5240.00	101.3 AV			1.70 H	315	62.0	39.3
3	5350.00	57.3 PK	74.0	-16.7	1.66 H	320	53.0	4.3
4	5350.00	44.3 AV	54.0	-9.7	1.66 H	320	40.0	4.3
5	#10480.00	58.4 PK	68.2	-9.8	2.37 H	225	41.4	17.0
6	15720.00	-	-	-	-	-	-	-
7	20960.00	-	-	-	-	-	-	-
8	#26200.00	-	-	-	-	-	-	-
9	31440.00	-	-	-	-	-	-	-
10	#36680.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

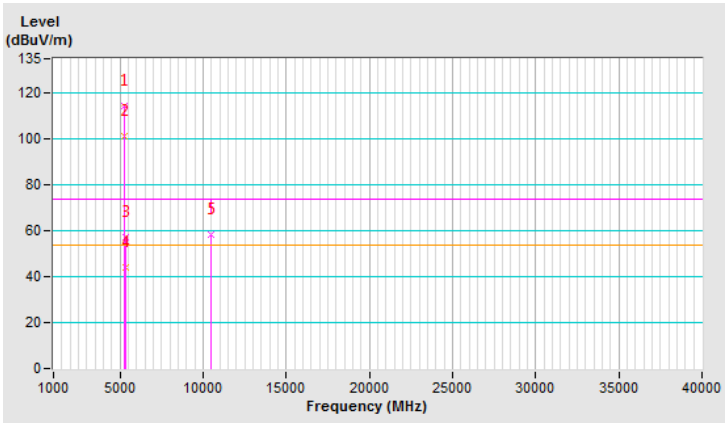


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 48：5240 MHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	24℃	量 測 場 地 濕 度 ：	69%RH
測 試 日 期 ：	108 年 05 月 20 日	測 試 者 ：	鄭詠璋

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5240.00	112.2 PK			2.66 V	348	72.9	39.3
2	*5240.00	99.0 AV			2.66 V	348	59.7	39.3
3	5350.00	55.8 PK	74.0	-18.2	1.96 V	328	51.5	4.3
4	5350.00	44.5 AV	54.0	-9.5	1.96 V	328	40.2	4.3
5	#10480.00	58.4 PK	68.2	-9.8	2.69 V	211	41.4	17.0
6	15720.00	-	-	-	-	-	-	-
7	20960.00	-	-	-	-	-	-	-
8	#26200.00	-	-	-	-	-	-	-
9	31440.00	-	-	-	-	-	-	-
10	#36680.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

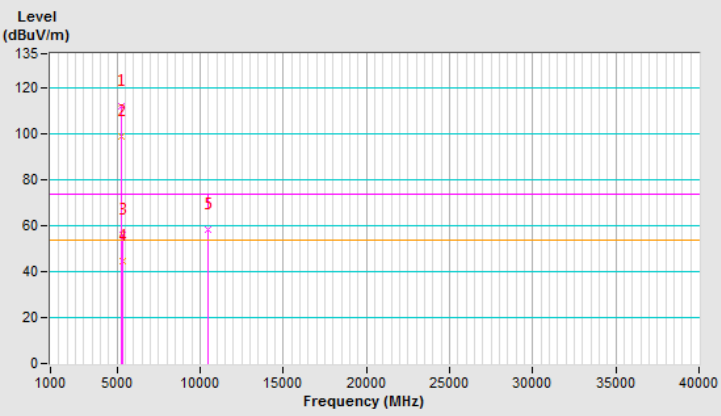


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 149：5745 MHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	24℃	量 測 場 地 濕 度 ：	69%RH
測 試 日 期 ：	108 年 05 月 20 日	測 試 者 ：	鄭詠璋

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5745.00	114.7 PK			1.64 H	307	74.6	40.1
2	*5745.00	101.5 AV			1.64 H	307	61.4	40.1
3	11490.00	58.5 PK	74.0	-15.5	2.23 H	195	40.5	18.0
4	11490.00	44.6 AV	54.0	-9.4	2.23 H	195	26.6	18.0
5	#17235.00	-	-	-	-	-	-	-
6	22980.00	-	-	-	-	-	-	-
7	#28725.00	-	-	-	-	-	-	-
8	#34470.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

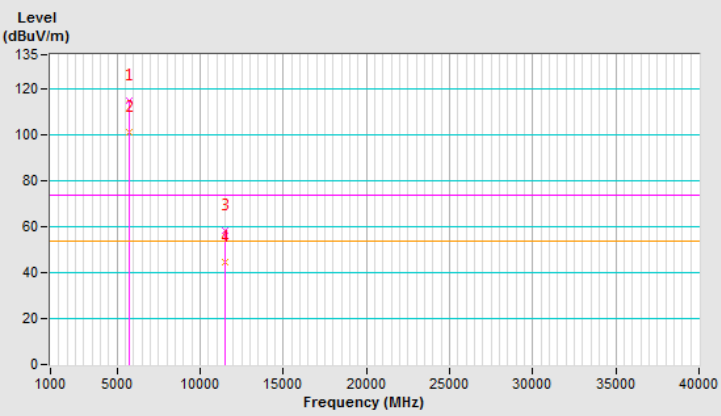


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 149：5745 MHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	24℃	量 測 場 地 濕 度 ：	69%RH
測 試 日 期 ：	108 年 05 月 20 日	測 試 者 ：	鄭詠璋

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5745.00	114.7 PK			3.34 V	12	74.6	40.1
2	*5745.00	101.5 AV			3.34 V	12	61.4	40.1
3	11490.00	59.4 PK	74.0	-14.6	2.33 V	179	41.4	18.0
4	11490.00	45.6 AV	54.0	-8.4	2.33 V	179	27.6	18.0
5	#17235.00	-	-	-	-	-	-	-
6	22980.00	-	-	-	-	-	-	-
7	#28725.00	-	-	-	-	-	-	-
8	#34470.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

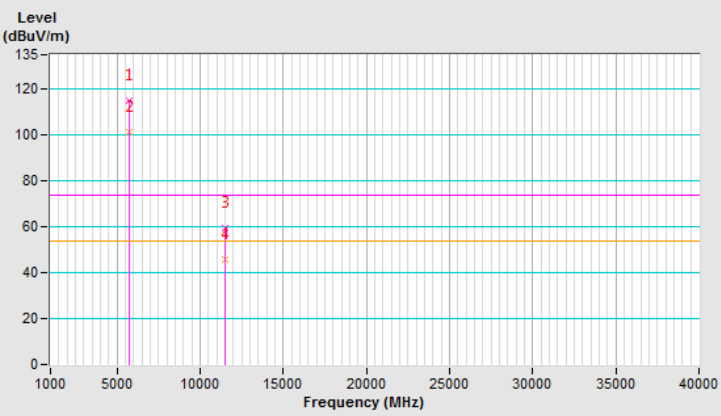


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 149：5745 MHz (OOBE)	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	24℃	量 測 場 地 濕 度 ：	69%RH
測 試 日 期 ：	108 年 05 月 20 日	測 試 者 ：	鄭詠璋

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5647.44	56.2 PK	68.2	-12.0	1.64 H	307	51.7	4.5
2	#5982.69	57.6 PK	68.2	-10.6	1.64 H	307	52.2	5.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

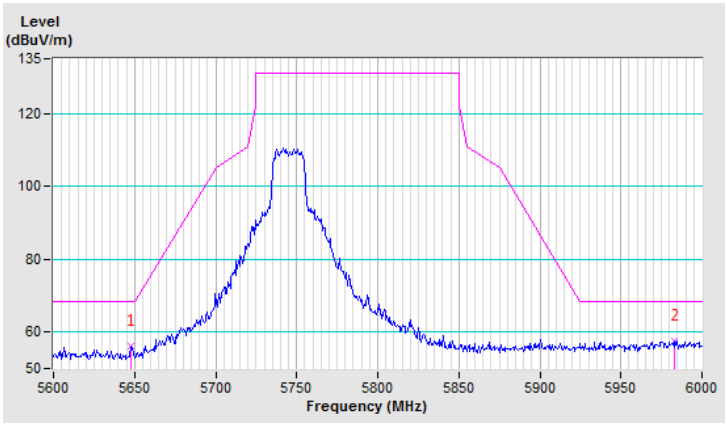


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 149：5745 MHz (OOBE)	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	24℃	量 測 場 地 濕 度 ：	69%RH
測 試 日 期 ：	108 年 05 月 20 日	測 試 者 ：	鄭詠璋

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5644.23	55.7 PK	68.2	-12.5	3.34 V	12	51.2	4.5
2	#5939.10	57.7 PK	68.2	-10.5	3.34 V	12	52.4	5.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

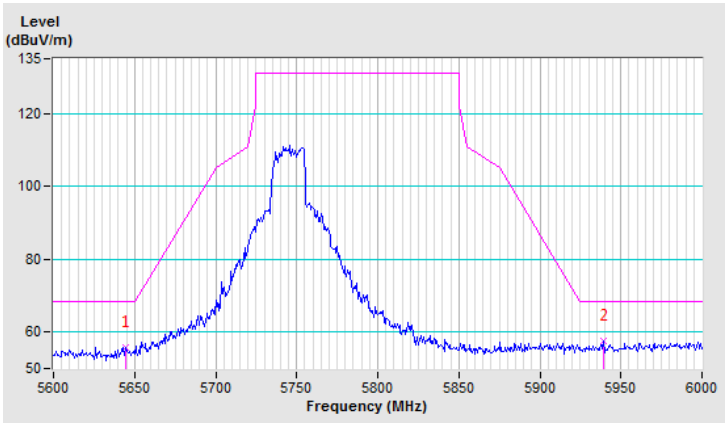


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 157：5785 MHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	24℃	量 測 場 地 濕 度 ：	69%RH
測 試 日 期 ：	108 年 05 月 20 日	測 試 者 ：	鄭詠璋

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5785.00	115.4 PK			1.71 H	301	75.1	40.3
2	*5785.00	101.9 AV			1.71 H	301	61.6	40.3
3	11570.00	58.3 PK	74.0	-15.7	2.61 H	173	40.6	17.7
4	11570.00	44.7 AV	54.0	-9.3	2.61 H	173	27.0	17.7
5	#17355.00	-	-	-	-	-	-	-
6	#23140.00	-	-	-	-	-	-	-
7	#28925.00	-	-	-	-	-	-	-
8	#34710.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

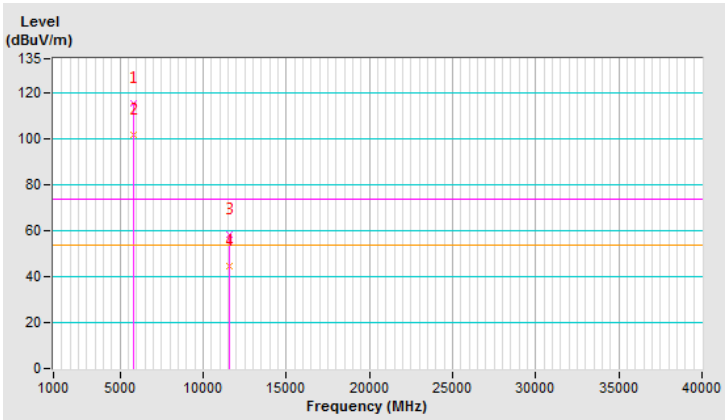


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 157：5785 MHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	24℃	量 測 場 地 濕 度 ：	69%RH
測 試 日 期 ：	108 年 05 月 20 日	測 試 者 ：	鄭詠璋

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5785.00	115.3 PK			3.31 V	10	75.0	40.3
2	*5785.00	102.1 AV			3.31 V	10	61.8	40.3
3	11570.00	59.1 PK	74.0	-14.9	2.36 V	192	41.4	17.7
4	11570.00	46.0 AV	54.0	-8.0	2.36 V	192	28.3	17.7
5	#17355.00	-	-	-	-	-	-	-
6	#23140.00	-	-	-	-	-	-	-
7	#28925.00	-	-	-	-	-	-	-
8	#34710.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

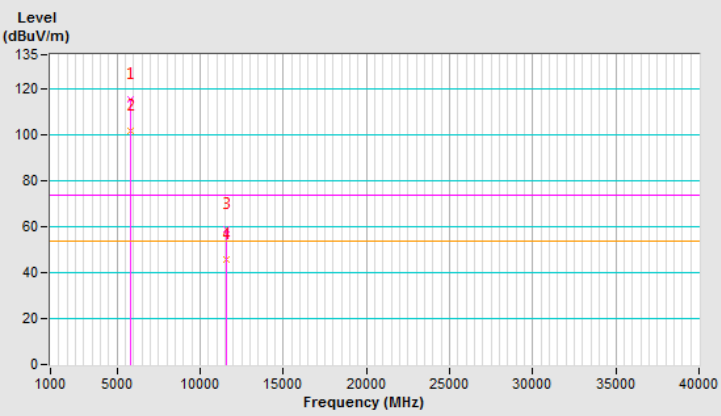


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 157：5785 MHz (OOBE)	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	24℃	量 測 場 地 濕 度 ：	69%RH
測 試 日 期 ：	108 年 05 月 20 日	測 試 者 ：	鄭詠璋

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5603.21	55.0 PK	68.2	-13.2	1.71 H	301	50.4	4.6
2	#5975.00	58.1 PK	68.2	-10.1	1.71 H	301	52.7	5.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

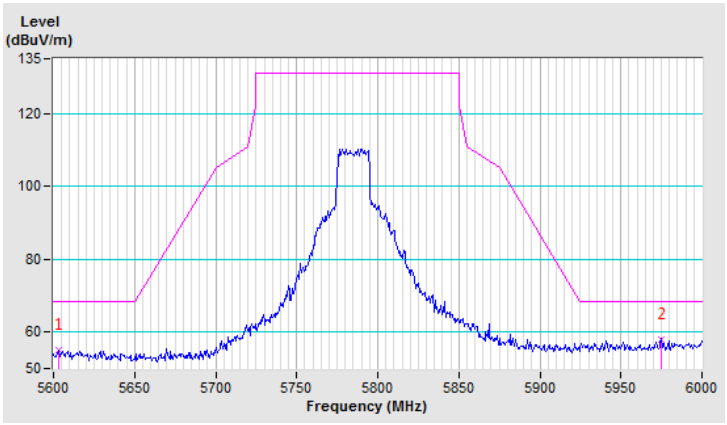


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 157：5785 MHz (OOBE)	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	24℃	量 測 場 地 濕 度 ：	69%RH
測 試 日 期 ：	108 年 05 月 20 日	測 試 者 ：	鄭詠璋

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5646.15	55.0 PK	68.2	-13.2	3.31 V	10	50.5	4.5
2	#5999.36	57.7 PK	68.2	-10.5	3.31 V	10	52.3	5.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

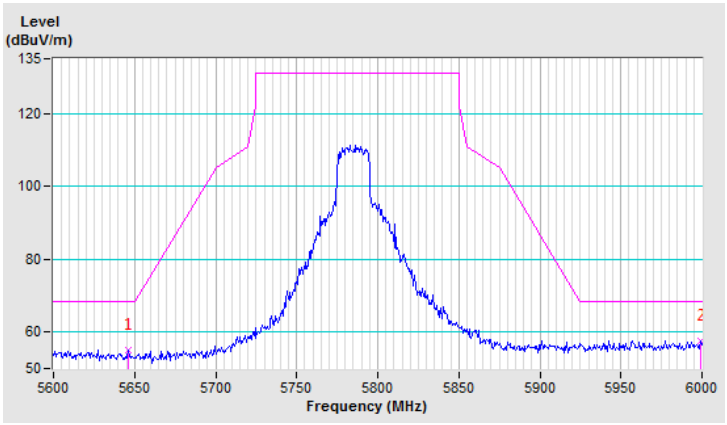


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 165：5825 MHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	24℃	量 測 場 地 濕 度 ：	69%RH
測 試 日 期 ：	108 年 05 月 20 日	測 試 者 ：	鄭詠璋

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5825.00	116.5 PK			1.65 H	305	76.1	40.4
2	*5825.00	102.9 AV			1.65 H	305	62.5	40.4
3	11650.00	60.1 PK	74.0	-13.9	2.39 H	174	42.6	17.5
4	11650.00	45.9 AV	54.0	-8.1	2.39 H	174	28.4	17.5
5	#17475.00	-	-	-	-	-	-	-
6	#23300.00	-	-	-	-	-	-	-
7	#29125.00	-	-	-	-	-	-	-
8	#34950.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

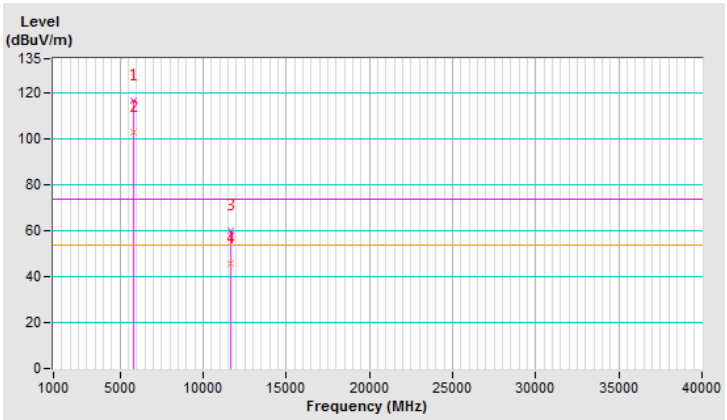


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 165：5825 MHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	24℃	量 測 場 地 濕 度 ：	69%RH
測 試 日 期 ：	108 年 05 月 20 日	測 試 者 ：	鄭詠璋

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5825.00	114.7 PK			2.83 V	8	74.3	40.4
2	*5825.00	100.9 AV			2.83 V	8	60.5	40.4
3	11650.00	58.4 PK	74.0	-15.6	1.83 V	155	40.9	17.5
4	11650.00	45.3 AV	54.0	-8.7	1.83 V	155	27.8	17.5
5	#17475.00	-	-	-	-	-	-	-
6	#23300.00	-	-	-	-	-	-	-
7	#29125.00	-	-	-	-	-	-	-
8	#34950.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

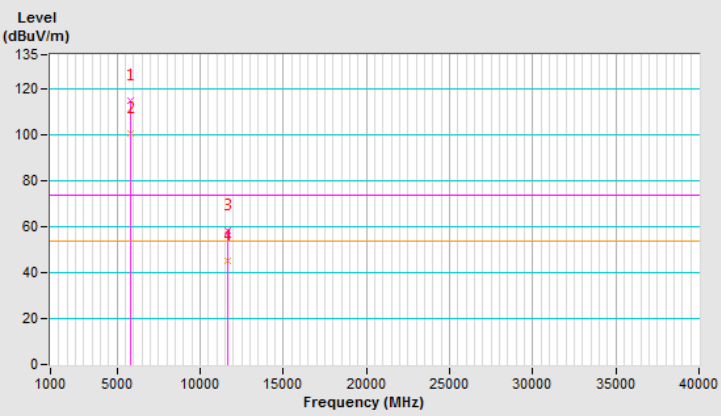


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 165：5825 MHz (OOBE)	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	24℃	量 測 場 地 濕 度 ：	69%RH
測 試 日 期 ：	108 年 05 月 20 日	測 試 者 ：	鄭詠璋

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5608.33	55.0 PK	68.2	-13.2	1.65 H	305	50.4	4.6
2	#5926.92	59.1 PK	68.2	-9.1	1.65 H	305	53.8	5.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

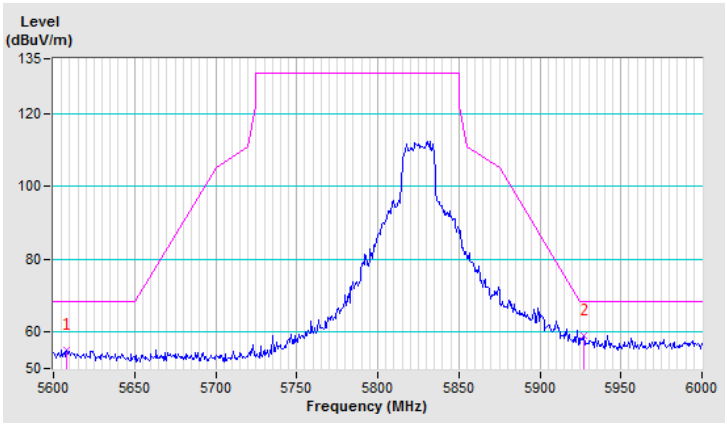


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 165：5825 MHz (OOBE)	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	24℃	量 測 場 地 濕 度 ：	69%RH
測 試 日 期 ：	108 年 05 月 20 日	測 試 者 ：	鄭詠璋

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5616.67	56.0 PK	68.2	-12.2	2.83 V	8	51.4	4.6
2	#5932.05	58.0 PK	68.2	-10.2	2.83 V	8	52.7	5.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

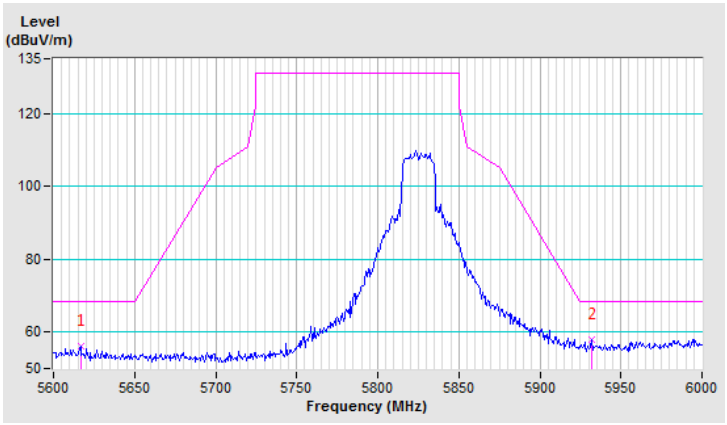


802.11ax (HE40)

操作模式：	發射	調變技術：	OFDMA
基本波頻率：	CH 38：5190 MHz	測試儀器：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=3kHz
量測場地溫度：	24℃	量測場地濕度：	69%RH
測試日期：	108 年 05 月 20 日	測試者：	鄭詠璋

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	70.6 PK	74.0	-3.4	1.71 H	319	66.2	4.4
2	5150.00	52.0 AV	54.0	-2.0	1.71 H	319	47.6	4.4
3	*5190.00	107.1 PK			1.66 H	314	67.6	39.5
4	*5190.00	94.0 AV			1.66 H	314	54.5	39.5
5	#10380.00	57.6 PK	68.2	-10.6	2.19 H	253	41.4	16.2
6	15570.00	-	-	-	-	-	-	-
7	20760.00	-	-	-	-	-	-	-
8	#25950.00	-	-	-	-	-	-	-
9	#31140.00	-	-	-	-	-	-	-
10	#36330.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

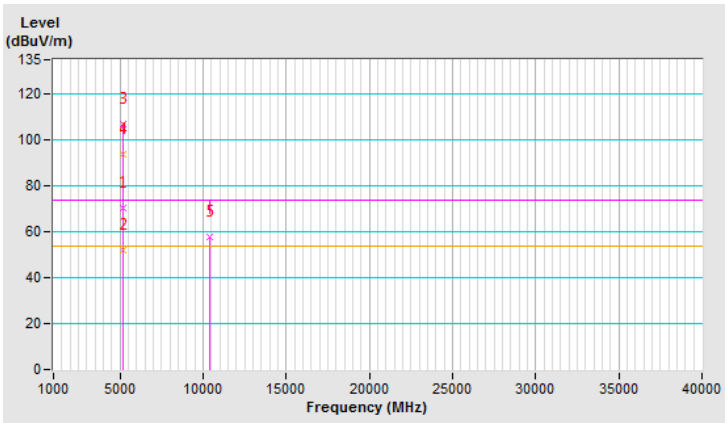


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 38：5190 MHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=3kHz
量 測 場 地 溫 度 ：	24℃	量 測 場 地 濕 度 ：	69%RH
測 試 日 期 ：	108 年 05 月 20 日	測 試 者 ：	鄭詠璋

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	65.4 PK	74.0	-8.6	1.09 V	299	61.0	4.4
2	5150.00	47.6 AV	54.0	-6.4	1.09 V	299	43.2	4.4
3	*5190.00	99.3 PK			1.20 V	298	59.8	39.5
4	*5190.00	87.0 AV			1.20 V	298	47.5	39.5
5	#10380.00	57.4 PK	68.2	-10.8	1.89 V	217	41.2	16.2
6	15570.00	-	-	-	-	-	-	-
7	20760.00	-	-	-	-	-	-	-
8	#25950.00	-	-	-	-	-	-	-
9	#31140.00	-	-	-	-	-	-	-
10	#36330.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

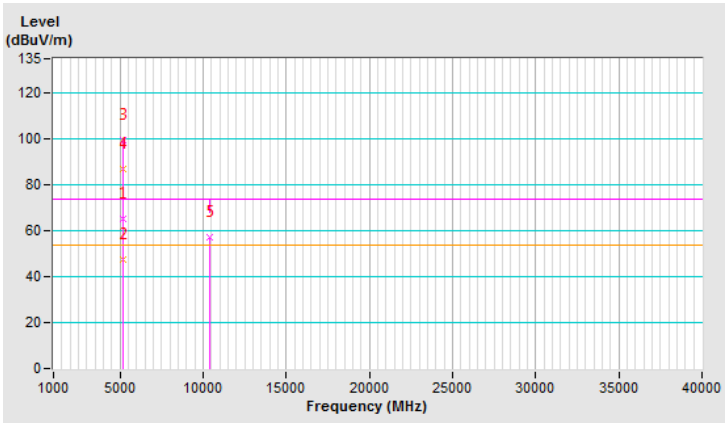


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 46：5230 MHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=3kHz
量 測 場 地 溫 度 ：	24℃	量 測 場 地 濕 度 ：	69%RH
測 試 日 期 ：	108 年 05 月 20 日	測 試 者 ：	鄭詠璋

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	66.2 PK	74.0	-7.8	1.71 H	321	61.8	4.4
2	5150.00	52.6 AV	54.0	-1.4	1.71 H	321	48.2	4.4
3	*5230.00	110.9 PK			1.48 H	319	71.6	39.3
4	*5230.00	98.0 AV			1.48 H	319	58.7	39.3
5	5350.00	59.2 PK	74.0	-14.8	1.53 H	304	54.9	4.3
6	5350.00	45.8 AV	54.0	-8.2	1.53 H	304	41.5	4.3
7	#10460.00	58.6 PK	68.2	-9.6	1.98 H	262	41.8	16.8
8	15690.00	-	-	-	-	-	-	-
9	20920.00	-	-	-	-	-	-	-
10	#26150.00	-	-	-	-	-	-	-
11	31380.00	-	-	-	-	-	-	-
12	#36610.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

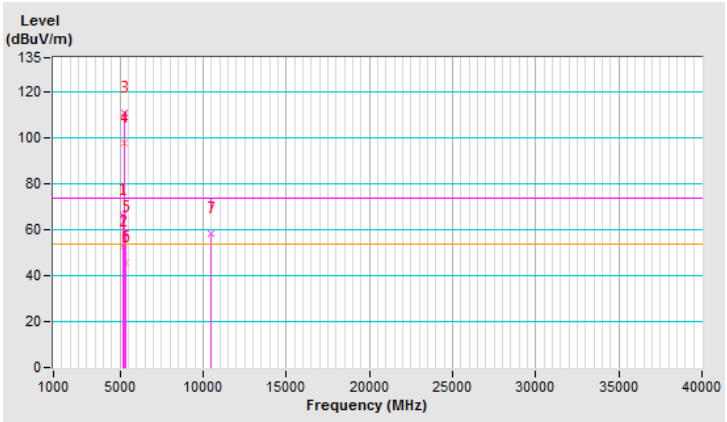


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 46：5230 MHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=3kHz
量 測 場 地 溫 度 ：	24℃	量 測 場 地 濕 度 ：	69%RH
測 試 日 期 ：	108 年 05 月 20 日	測 試 者 ：	鄭詠璋

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	61.9 PK	74.0	-12.1	2.48 V	299	57.5	4.4
2	5150.00	48.6 AV	54.0	-5.4	2.48 V	299	44.2	4.4
3	*5230.00	105.0 PK			2.63 V	290	65.7	39.3
4	*5230.00	92.4 AV			2.63 V	290	53.1	39.3
5	5350.00	56.7 PK	74.0	-17.3	2.25 V	276	52.4	4.3
6	5350.00	44.2 AV	54.0	-9.8	2.25 V	276	39.9	4.3
7	#10460.00	58.4 PK	68.2	-9.8	1.78 V	199	41.6	16.8
8	15690.00	-	-	-	-	-	-	-
9	20920.00	-	-	-	-	-	-	-
10	#26150.00	-	-	-	-	-	-	-
11	31380.00	-	-	-	-	-	-	-
12	#36610.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

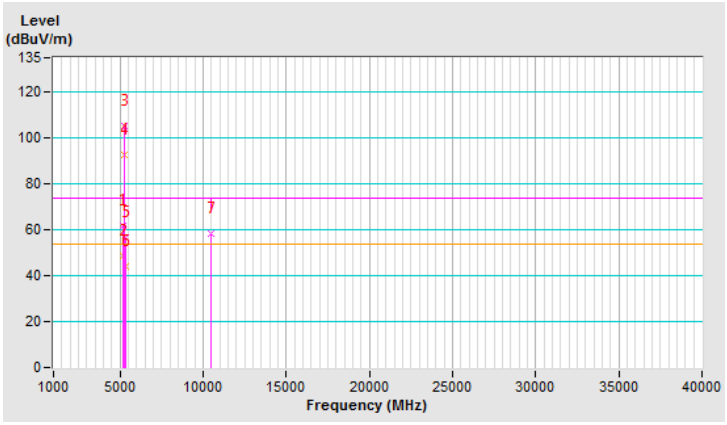


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 151：5755 MHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=3kHz
量 測 場 地 溫 度 ：	24℃	量 測 場 地 濕 度 ：	69%RH
測 試 日 期 ：	108 年 05 月 20 日	測 試 者 ：	鄭詠璋

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5755.00	112.6 PK			1.77 H	306	72.5	40.1
2	*5755.00	99.7 AV			1.77 H	306	59.6	40.1
3	11510.00	58.4 PK	74.0	-15.6	2.34 H	155	40.3	18.1
4	11510.00	45.9 AV	54.0	-8.1	2.34 H	155	27.8	18.1
5	#17265.00	-	-	-	-	-	-	-
6	23020.00	-	-	-	-	-	-	-
7	#28775.00	-	-	-	-	-	-	-
8	#34530.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

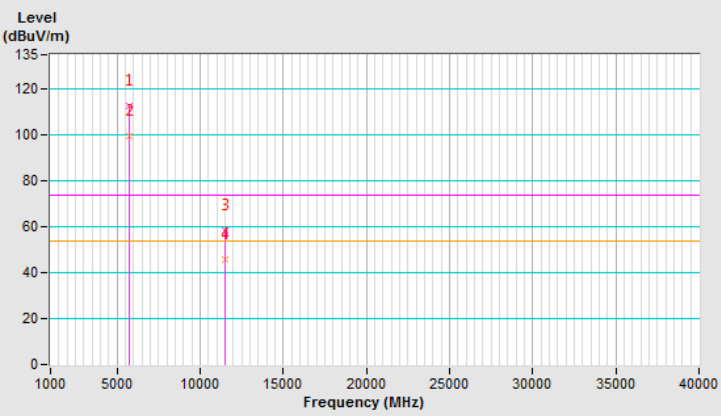


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 151：5755 MHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=3kHz
量 測 場 地 溫 度 ：	24℃	量 測 場 地 濕 度 ：	69%RH
測 試 日 期 ：	108 年 05 月 20 日	測 試 者 ：	鄭詠璋

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5755.00	112.9 PK			3.34 V	12	72.8	40.1
2	*5755.00	100.0 AV			3.34 V	12	59.9	40.1
3	11510.00	59.3 PK	74.0	-14.7	1.58 V	210	41.2	18.1
4	11510.00	46.4 AV	54.0	-7.6	1.58 V	210	28.3	18.1
5	#17265.00	-	-	-	-	-	-	-
6	23020.00	-	-	-	-	-	-	-
7	#28775.00	-	-	-	-	-	-	-
8	#34530.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

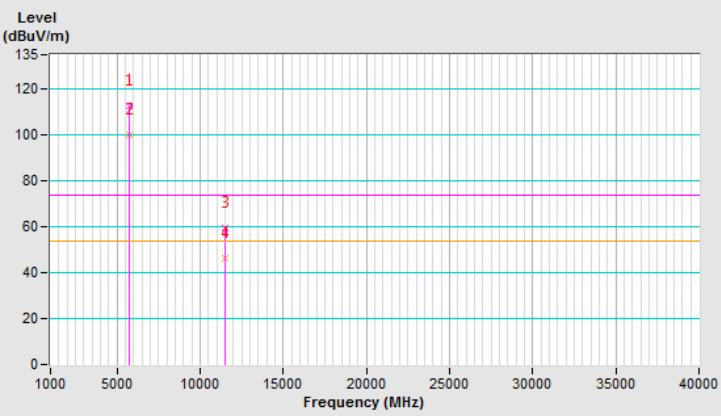


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 151：5755 MHz (OOBE)	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=3kHz
量 測 場 地 溫 度 ：	24℃	量 測 場 地 濕 度 ：	69%RH
測 試 日 期 ：	108 年 05 月 20 日	測 試 者 ：	鄭詠璋

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5649.36	61.9 PK	68.2	-6.3	1.77 H	306	57.4	4.5
2	#5982.05	59.3 PK	68.2	-8.9	1.77 H	306	53.9	5.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

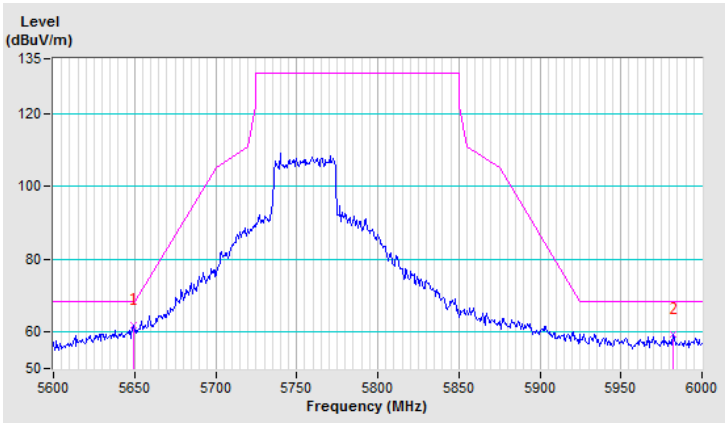


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 151：5755 MHz (OOBE)	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=3kHz
量 測 場 地 溫 度 ：	24℃	量 測 場 地 濕 度 ：	69%RH
測 試 日 期 ：	108 年 05 月 20 日	測 試 者 ：	鄭詠璋

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5646.79	62.1 PK	68.2	-6.1	3.34 V	12	57.6	4.5
2	#5992.95	58.9 PK	68.2	-9.3	3.34 V	12	53.5	5.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

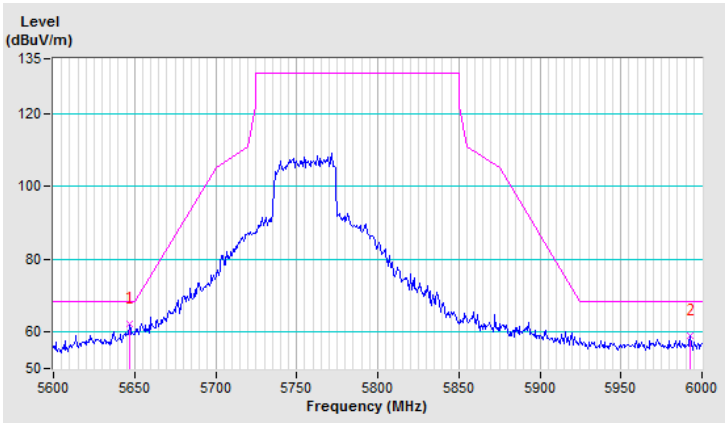


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 159：5795 MHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=3kHz
量 測 場 地 溫 度 ：	24℃	量 測 場 地 濕 度 ：	69%RH
測 試 日 期 ：	108 年 05 月 20 日	測 試 者 ：	鄭詠璋

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5795.00	113.0 PK			1.72 H	305	72.6	40.4
2	*5795.00	100.7 AV			1.72 H	305	60.3	40.4
3	11590.00	58.6 PK	74.0	-15.4	2.61 H	193	41.0	17.6
4	11590.00	46.3 AV	54.0	-7.7	2.61 H	193	28.7	17.6
5	#17385.00	-	-	-	-	-	-	-
6	#23180.00	-	-	-	-	-	-	-
7	#28975.00	-	-	-	-	-	-	-
8	#34770.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

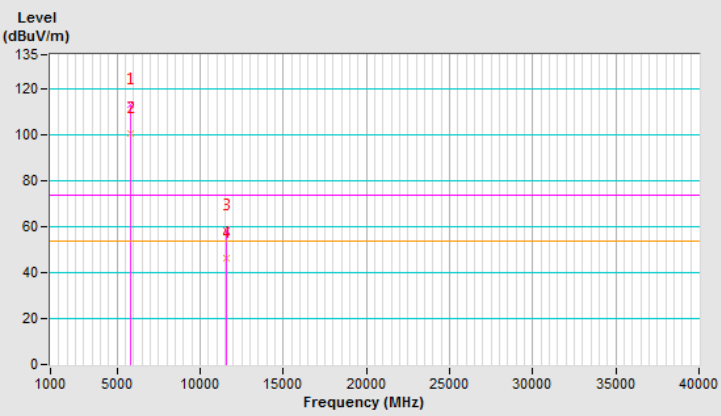


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 159：5795 MHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=3kHz
量 測 場 地 溫 度 ：	24℃	量 測 場 地 濕 度 ：	69%RH
測 試 日 期 ：	108 年 05 月 20 日	測 試 者 ：	鄭詠璋

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5795.00	113.3 PK			3.44 V	10	72.9	40.4
2	*5795.00	100.0 AV			3.44 V	10	59.6	40.4
3	11590.00	58.6 PK	74.0	-15.4	1.38 V	149	41.0	17.6
4	11590.00	45.9 AV	54.0	-8.1	1.38 V	149	28.3	17.6
5	#17385.00	-	-	-	-	-	-	-
6	#23180.00	-	-	-	-	-	-	-
7	#28975.00	-	-	-	-	-	-	-
8	#34770.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

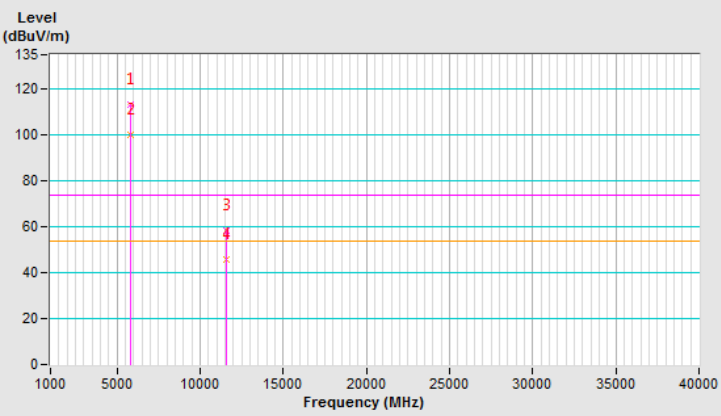


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 159：5795 MHz (OOBE)	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=3kHz
量 測 場 地 溫 度 ：	24℃	量 測 場 地 濕 度 ：	69%RH
測 試 日 期 ：	108 年 05 月 20 日	測 試 者 ：	鄭詠璋

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5630.77	57.1 PK	68.2	-11.1	1.72 H	305	52.6	4.5
2	#5927.56	63.5 PK	68.2	-4.7	1.72 H	305	58.2	5.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

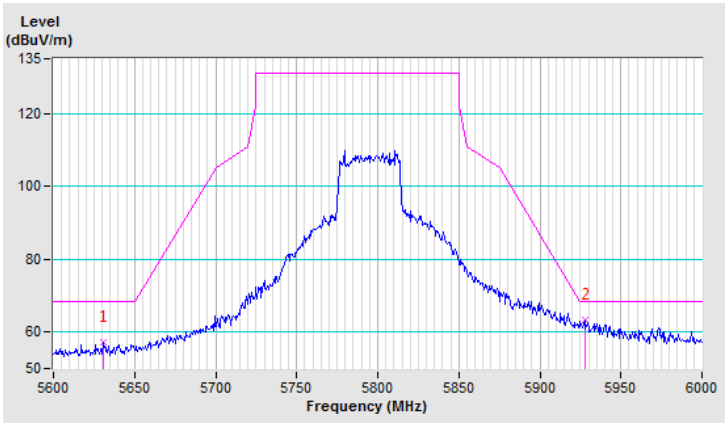


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 159：5795 MHz (OOBE)	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=3kHz
量 測 場 地 溫 度 ：	24℃	量 測 場 地 濕 度 ：	69%RH
測 試 日 期 ：	108 年 05 月 20 日	測 試 者 ：	鄭詠璋

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5608.33	55.4 PK	68.2	-12.8	3.44 V	10	50.8	4.6
2	#5927.56	60.9 PK	68.2	-7.3	3.44 V	10	55.6	5.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

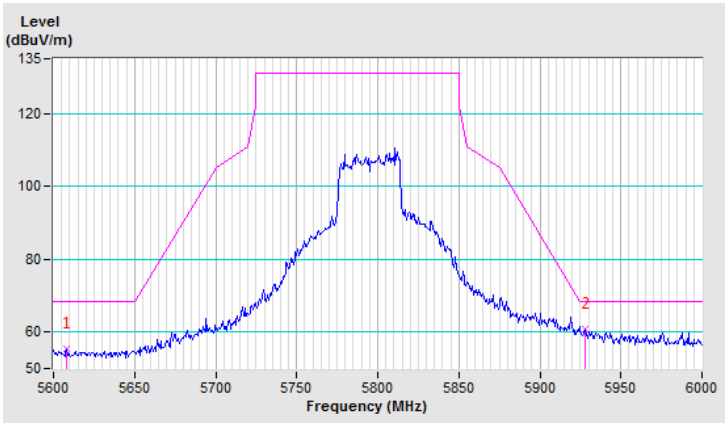


802.11ax (HE80)

操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 42：5210 MHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=3kHz
量 測 場 地 溫 度 ：	24℃	量 測 場 地 濕 度 ：	69%RH
測 試 日 期 ：	108 年 05 月 20 日	測 試 者 ：	鄭詠璋

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	70.9 PK	74.0	-3.1	1.44 H	322	66.5	4.4
2	5150.00	53.0 AV	54.0	-1.0	1.44 H	322	48.6	4.4
3	*5210.00	104.1 PK			1.60 H	320	64.7	39.4
4	*5210.00	91.7 AV			1.60 H	320	52.3	39.4
5	5350.00	59.0 PK	74.0	-15.0	1.57 H	311	54.7	4.3
6	5350.00	45.3 AV	54.0	-8.7	1.57 H	311	41.0	4.3
7	#10420.00	57.9 PK	68.2	-10.3	2.85 H	274	41.4	16.5
8	15630.00	-	-	-	-	-	-	-
9	20840.00	-	-	-	-	-	-	-
10	#26050.00	-	-	-	-	-	-	-
11	31260.00	-	-	-	-	-	-	-
12	36470.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

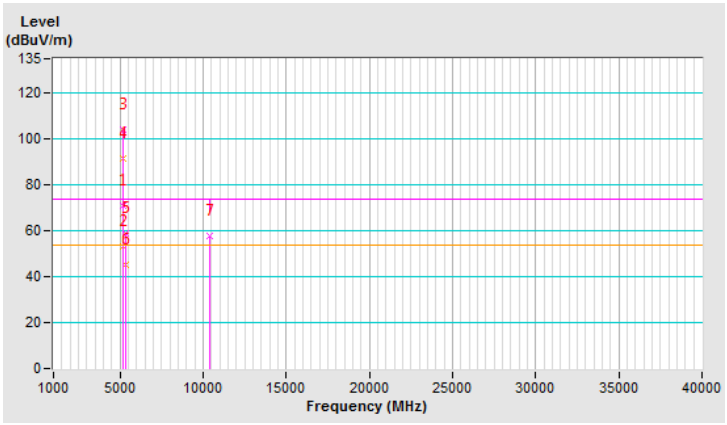


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 42：5210 MHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=3kHz
量 測 場 地 溫 度 ：	24℃	量 測 場 地 濕 度 ：	69%RH
測 試 日 期 ：	108 年 05 月 20 日	測 試 者 ：	鄭詠璋

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	66.2 PK	74.0	-7.8	1.08 V	298	61.8	4.4
2	5150.00	48.8 AV	54.0	-5.2	1.08 V	298	44.4	4.4
3	*5210.00	97.0 PK			1.20 V	302	57.6	39.4
4	*5210.00	85.0 AV			1.20 V	302	45.6	39.4
5	5350.00	57.1 PK	74.0	-16.9	1.14 V	306	52.8	4.3
6	5350.00	44.7 AV	54.0	-9.3	1.14 V	306	40.4	4.3
7	#10420.00	57.3 PK	68.2	-10.9	1.65 V	191	40.8	16.5
8	15630.00	-	-	-	-	-	-	-
9	20840.00	-	-	-	-	-	-	-
10	#26050.00	-	-	-	-	-	-	-
11	31260.00	-	-	-	-	-	-	-
12	36470.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

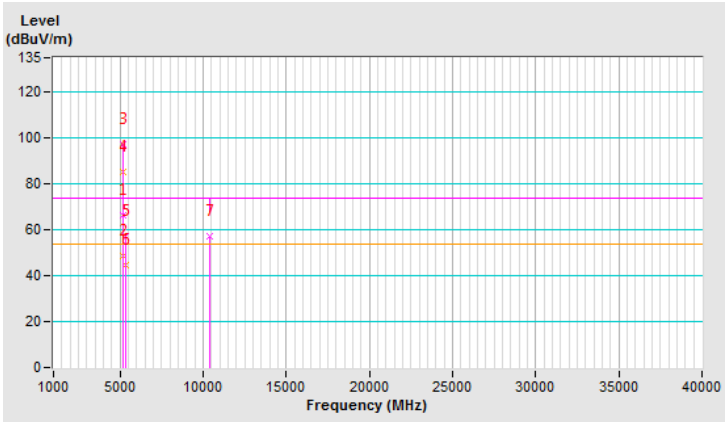


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 155：5775 MHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=3kHz
量 測 場 地 溫 度 ：	24℃	量 測 場 地 濕 度 ：	69%RH
測 試 日 期 ：	108 年 05 月 20 日	測 試 者 ：	鄭詠璋

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5650.00	65.3 PK	68.2	-2.9	1.59 H	303	60.8	4.5
2	*5775.00	107.7 PK			1.49 H	303	67.4	40.3
3	*5775.00	95.0 AV			1.49 H	303	54.7	40.3
4	#5925.00	66.7 PK	68.2	-1.5	1.63 H	310	61.4	5.3
5	11550.00	58.9 PK	74.0	-15.1	2.15 H	198	41.0	17.9
6	11550.00	46.8 AV	54.0	-7.2	2.15 H	198	28.9	17.9
7	#17325.00	-	-	-	-	-	-	-
8	23100.00	-	-	-	-	-	-	-
9	#28875.00	-	-	-	-	-	-	-
10	#34650.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

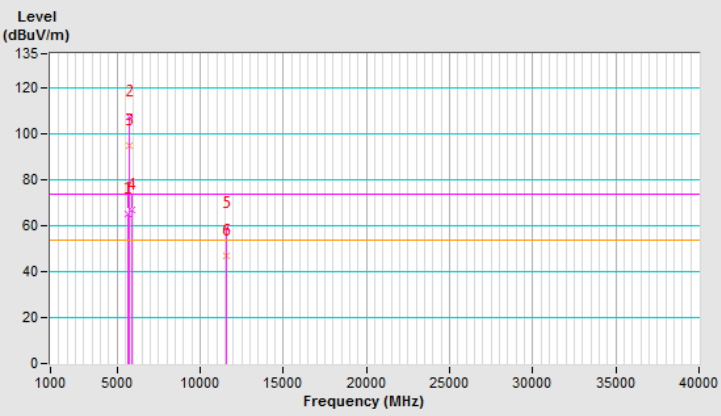


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 155：5775 MHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=3kHz
量 測 場 地 溫 度 ：	24℃	量 測 場 地 濕 度 ：	69%RH
測 試 日 期 ：	108 年 05 月 20 日	測 試 者 ：	鄭詠璋

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5650.00	61.7 PK	68.2	-6.5	2.02 V	3	57.2	4.5
2	*5775.00	106.6 PK			2.42 V	20	66.3	40.3
3	*5775.00	93.4 AV			2.42 V	20	53.1	40.3
4	#5925.00	64.6 PK	68.2	-3.6	2.19 V	15	59.3	5.3
5	11550.00	58.5 PK	74.0	-15.5	2.48 V	159	40.6	17.9
6	11550.00	45.9 AV	54.0	-8.1	2.48 V	159	28.0	17.9
7	#17325.00	-	-	-	-	-	-	-
8	23100.00	-	-	-	-	-	-	-
9	#28875.00	-	-	-	-	-	-	-
10	#34650.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

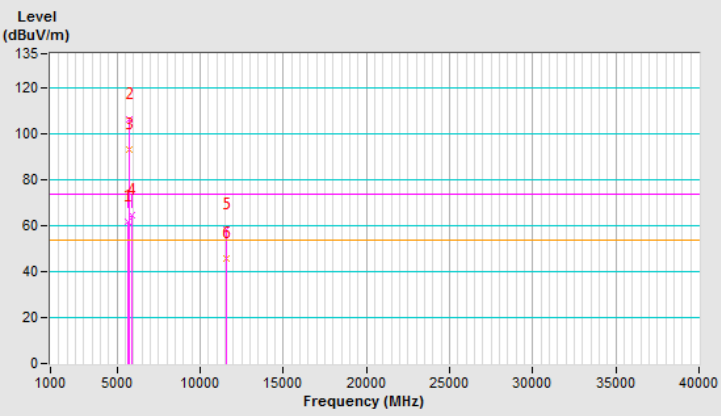


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 155：5775 MHz (OOBE)	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=3kHz
量 測 場 地 溫 度 ：	24℃	量 測 場 地 濕 度 ：	69%RH
測 試 日 期 ：	108 年 05 月 20 日	測 試 者 ：	鄭詠璋

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5648.72	60.7 PK	68.2	-7.5	1.49 H	303	56.2	4.5
2	#5925.00	64.6 PK	68.2	-3.6	1.49 H	303	59.3	5.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

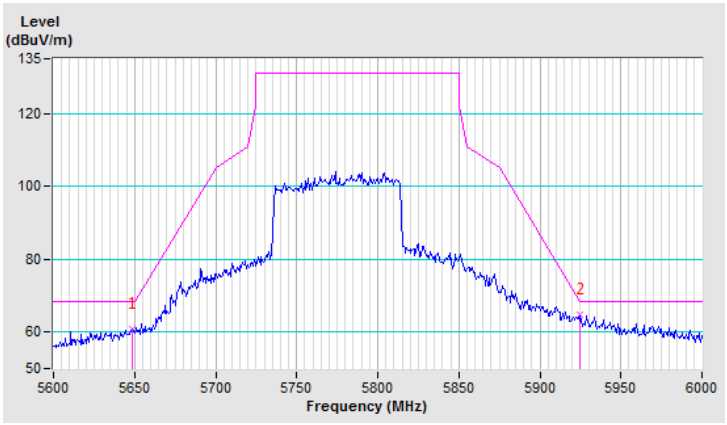


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 155：5775 MHz (OOBE)	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=3kHz
量 測 場 地 溫 度 ：	24℃	量 測 場 地 濕 度 ：	69%RH
測 試 日 期 ：	108 年 05 月 20 日	測 試 者 ：	鄭詠璋

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5642.31	59.0 PK	68.2	-9.2	2.42 V	20	54.5	4.5
2	#5942.95	62.1 PK	68.2	-6.1	2.42 V	20	56.8	5.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

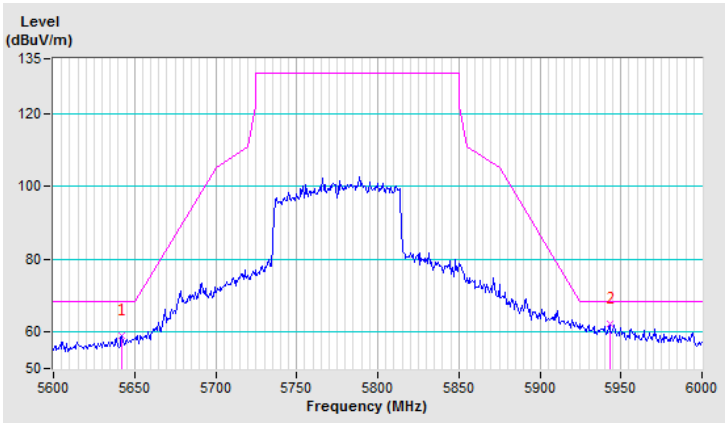

2TX


802.11a

操 作 模 式 ：	發射	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 36：5180 MHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 03 月 12 日	測 試 者 ：	李哲銘

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	70.5 PK	74.0	-3.5	1.00 H	59	57.9	12.6
2	5150.00	53.0 AV	54.0	-1.0	1.00 H	59	40.4	12.6
3	*5180.00	114.3 PK			1.00 H	57	72.8	41.5
4	*5180.00	105.0 AV			1.00 H	57	63.5	41.5
5	#10360.00	62.5 PK	68.2	-5.7	2.14 H	163	40.0	22.5
6	15540.00	-	-	-	-	-	-	-
7	20720.00	-	-	-	-	-	-	-
8	#25900.00	-	-	-	-	-	-	-
9	#31080.00	-	-	-	-	-	-	-
10	#36260.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

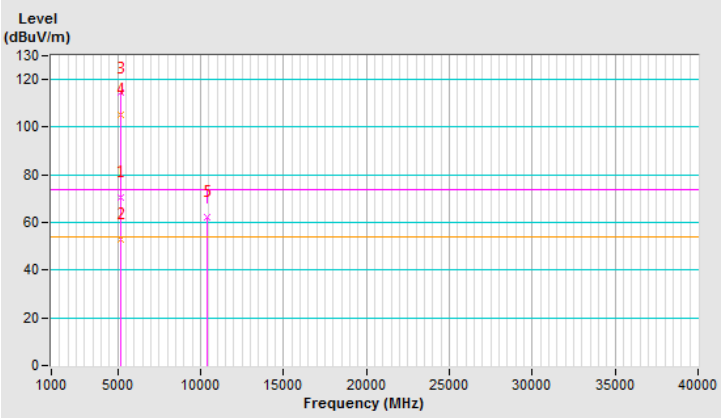


操 作 模 式 ：	發射	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 36：5180 MHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 03 月 12 日	測 試 者 ：	李哲銘

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	62.8 PK	74.0	-11.2	1.02 V	329	50.2	12.6
2	5150.00	47.9 AV	54.0	-6.1	1.02 V	329	35.3	12.6
3	*5180.00	109.3 PK			1.00 V	333	67.8	41.5
4	*5180.00	100.0 AV			1.00 V	333	58.5	41.5
5	#10360.00	62.3 PK	68.2	-5.9	2.66 V	252	39.8	22.5
6	15540.00	-	-	-	-	-	-	-
7	20720.00	-	-	-	-	-	-	-
8	#25900.00	-	-	-	-	-	-	-
9	#31080.00	-	-	-	-	-	-	-
10	#36260.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

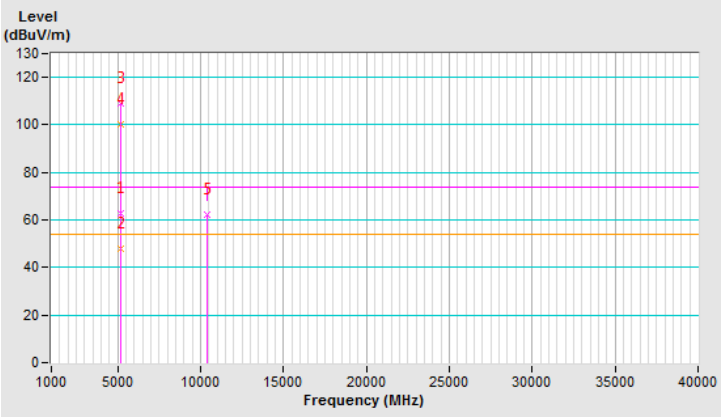


操 作 模 式 ：	發射	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 40：5200 MHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 03 月 12 日	測 試 者 ：	李哲銘

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	70.1 PK	74.0	-3.9	1.00 H	59	57.5	12.6
2	5150.00	53.0 AV	54.0	-1.0	1.00 H	59	40.4	12.6
3	*5200.00	118.0 PK			1.00 H	58	76.5	41.5
4	*5200.00	108.1 AV			1.00 H	58	66.6	41.5
5	#10400.00	62.7 PK	68.2	-5.5	1.93 H	251	39.8	22.9
6	15600.00	-	-	-	-	-	-	-
7	20800.00	-	-	-	-	-	-	-
8	#26000.00	-	-	-	-	-	-	-
9	31200.00	-	-	-	-	-	-	-
10	#36400.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

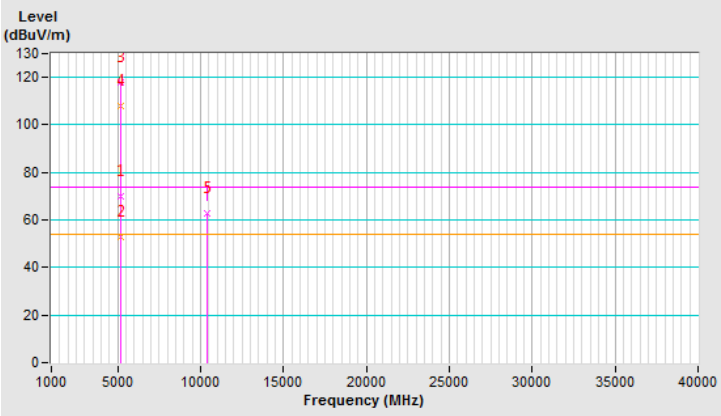


操 作 模 式 ：	發射	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 40：5200 MHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 03 月 12 日	測 試 者 ：	李哲銘

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	62.7 PK	74.0	-11.3	1.02 V	336	50.1	12.6
2	5150.00	48.2 AV	54.0	-5.8	1.02 V	336	35.6	12.6
3	*5200.00	112.8 PK			1.02 V	323	71.3	41.5
4	*5200.00	102.9 AV			1.02 V	323	61.4	41.5
5	#10400.00	62.4 PK	68.2	-5.8	2.65 V	20	39.5	22.9
6	15600.00	-	-	-	-	-	-	-
7	20800.00	-	-	-	-	-	-	-
8	#26000.00	-	-	-	-	-	-	-
9	31200.00	-	-	-	-	-	-	-
10	#36400.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

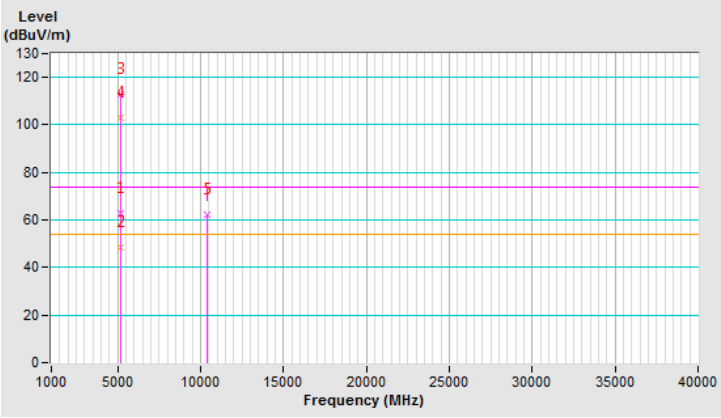


操 作 模 式 ：	發射	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 48：5240 MHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 03 月 12 日	測 試 者 ：	李哲銘

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5240.00	119.0 PK			1.00 H	64	77.8	41.2
2	*5240.00	108.9 AV			1.00 H	64	67.7	41.2
3	5350.00	61.7 PK	74.0	-12.3	1.09 H	84	49.3	12.4
4	5350.00	48.2 AV	54.0	-5.8	1.09 H	84	35.8	12.4
5	#10480.00	63.4 PK	68.2	-4.8	1.63 H	276	40.6	22.8
6	15720.00	-	-	-	-	-	-	-
7	20960.00	-	-	-	-	-	-	-
8	#26200.00	-	-	-	-	-	-	-
9	31440.00	-	-	-	-	-	-	-
10	#36680.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

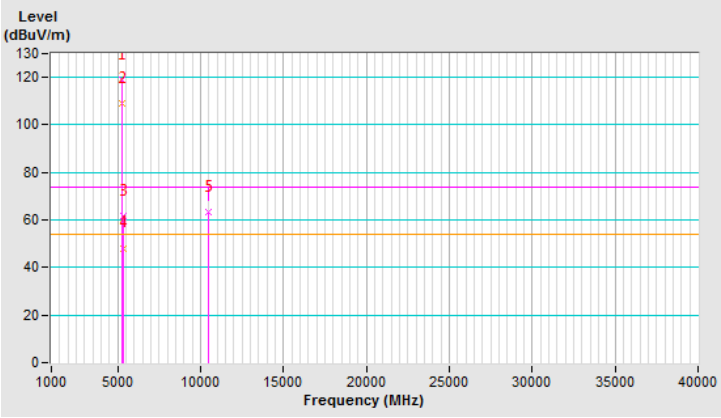


操 作 模 式 ：	發射	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 48：5240 MHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 03 月 12 日	測 試 者 ：	李哲銘

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5240.00	114.0 PK			1.00 V	333	72.8	41.2
2	*5240.00	103.9 AV			1.00 V	333	62.7	41.2
3	5350.00	61.3 PK	74.0	-12.7	1.05 V	330	48.9	12.4
4	5350.00	47.6 AV	54.0	-6.4	1.05 V	330	35.2	12.4
5	#10480.00	62.9 PK	68.2	-5.3	2.52 V	111	40.1	22.8
6	15720.00	-	-	-	-	-	-	-
7	20960.00	-	-	-	-	-	-	-
8	#26200.00	-	-	-	-	-	-	-
9	31440.00	-	-	-	-	-	-	-
10	#36680.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

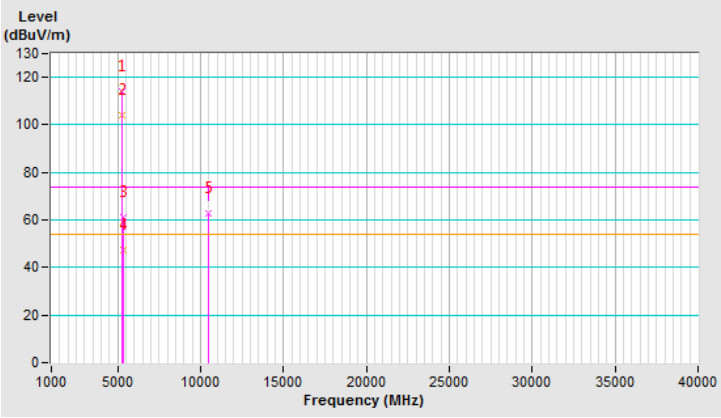


操 作 模 式 ：	發射	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 149：5745 MHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 03 月 12 日	測 試 者 ：	李哲銘

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5745.00	118.3 PK			1.11 H	37	75.8	42.5
2	*5745.00	108.4 AV			1.11 H	37	65.9	42.5
3	11490.00	64.6 PK	74.0	-9.4	2.22 H	285	40.5	24.1
4	11490.00	50.9 AV	54.0	-3.1	2.22 H	285	26.8	24.1
5	#17235.00	-	-	-	-	-	-	-
6	22980.00	-	-	-	-	-	-	-
7	#28725.00	-	-	-	-	-	-	-
8	#34470.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

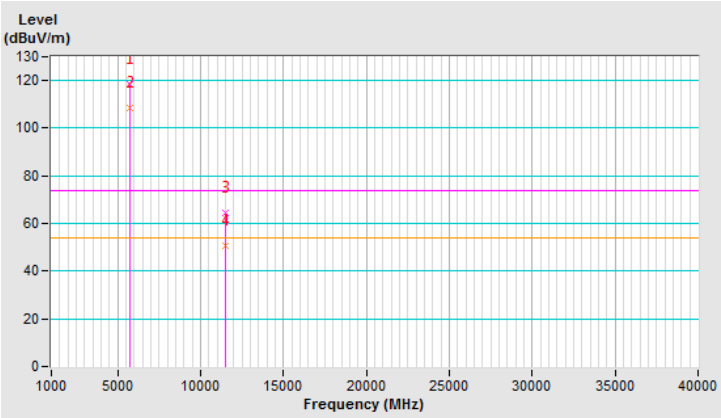


操 作 模 式 ：	發射	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 149：5745 MHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 03 月 12 日	測 試 者 ：	李哲銘

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5745.00	115.1 PK			2.45 V	27	72.6	42.5
2	*5745.00	105.0 AV			2.45 V	27	62.5	42.5
3	11490.00	64.2 PK	74.0	-9.8	2.69 V	210	40.1	24.1
4	11490.00	50.6 AV	54.0	-3.4	2.69 V	210	26.5	24.1
5	#17235.00	-	-	-	-	-	-	-
6	22980.00	-	-	-	-	-	-	-
7	#28725.00	-	-	-	-	-	-	-
8	#34470.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

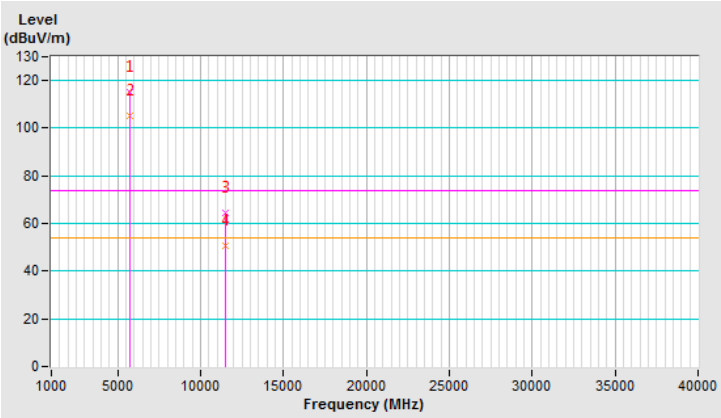


操 作 模 式 ：	發射	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 149：5745 MHz (OOBE)	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 03 月 12 日	測 試 者 ：	李哲銘

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5600.00	64.1 PK	68.2	-4.1	1.11 H	37	51.5	12.6
2	#5942.40	64.2 PK	68.2	-4.0	1.11 H	37	50.6	13.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

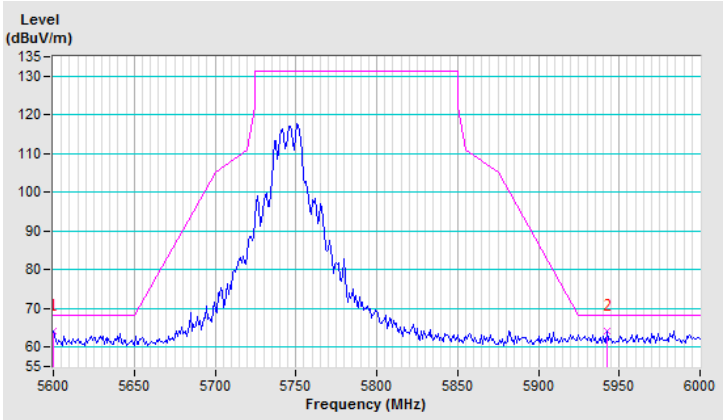


操 作 模 式 ：	發射	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 149：5745 MHz (OOBE)	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 03 月 12 日	測 試 者 ：	李哲銘

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5628.80	63.1 PK	68.2	-5.1	2.45 V	27	50.4	12.7
2	#5992.00	64.3 PK	68.2	-3.9	2.45 V	27	50.5	13.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

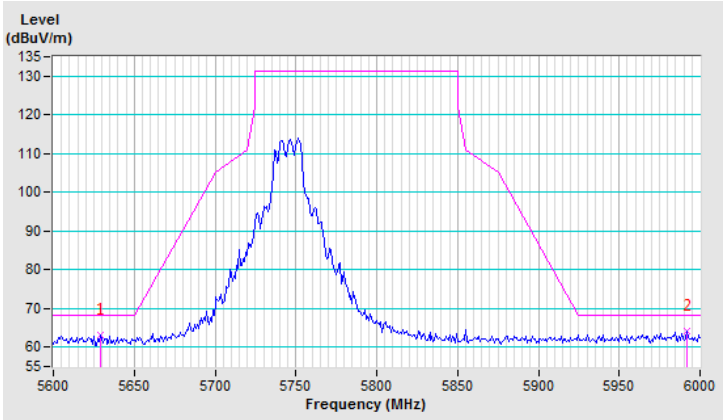


操 作 模 式 ：	發射	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 157：5785 MHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 03 月 12 日	測 試 者 ：	李哲銘

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5785.00	118.7 PK			1.21 H	40	76.1	42.6
2	*5785.00	108.8 AV			1.21 H	40	66.2	42.6
3	11570.00	64.5 PK	74.0	-9.5	2.55 H	59	40.5	24.0
4	11570.00	50.7 AV	54.0	-3.3	2.55 H	59	26.7	24.0
5	#17355.00	-	-	-	-	-	-	-
6	#23140.00	-	-	-	-	-	-	-
7	#28925.00	-	-	-	-	-	-	-
8	#34710.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

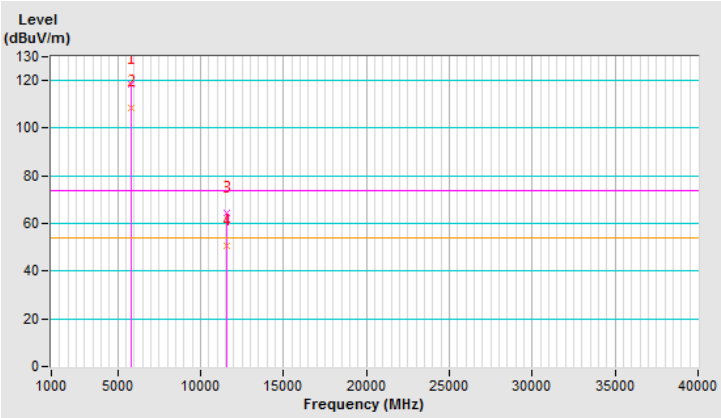


操 作 模 式 ：	發射	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 157：5785 MHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 03 月 12 日	測 試 者 ：	李哲銘

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5785.00	114.3 PK			2.40 V	33	71.7	42.6
2	*5785.00	104.8 AV			2.40 V	33	62.2	42.6
3	11570.00	64.0 PK	74.0	-10.0	1.52 V	124	40.0	24.0
4	11570.00	50.5 AV	54.0	-3.5	1.52 V	124	26.5	24.0
5	#17355.00	-	-	-	-	-	-	-
6	#23140.00	-	-	-	-	-	-	-
7	#28925.00	-	-	-	-	-	-	-
8	#34710.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

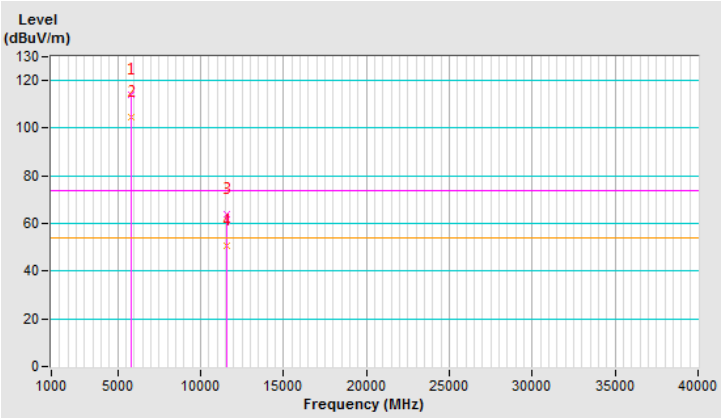


操 作 模 式 ：	發射	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 157：5785 MHz (OOBE)	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 03 月 12 日	測 試 者 ：	李哲銘

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5605.60	63.2 PK	68.2	-5.0	1.21 H	40	50.6	12.6
2	#5985.60	63.9 PK	68.2	-4.3	1.21 H	40	50.1	13.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

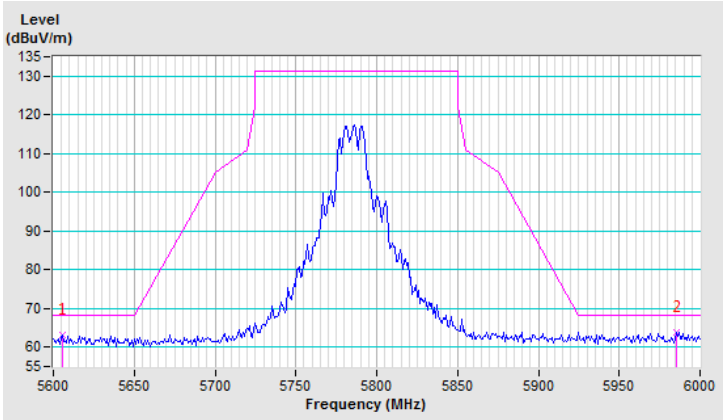


操 作 模 式 ：	發射	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 157：5785 MHz (OOBE)	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 03 月 12 日	測 試 者 ：	李哲銘

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5600.00	64.2 PK	68.2	-4.0	2.40 V	33	51.6	12.6
2	#5997.60	64.6 PK	68.2	-3.6	2.40 V	33	50.8	13.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

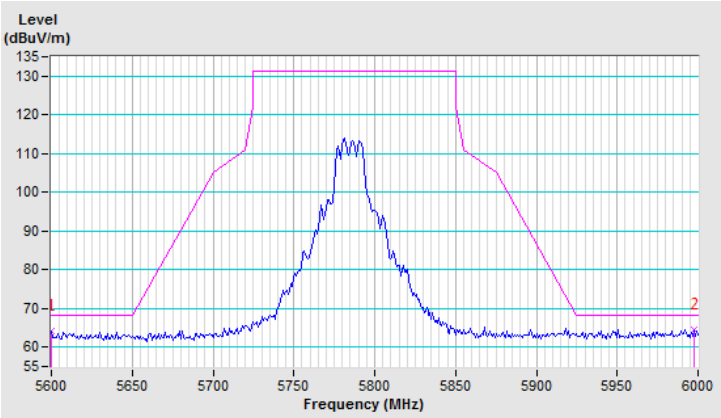


操 作 模 式 ：	發射	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 165：5825 MHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 03 月 12 日	測 試 者 ：	李哲銘

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5825.00	118.5 PK			1.21 H	42	75.9	42.6
2	*5825.00	108.6 AV			1.21 H	42	66.0	42.6
3	11650.00	63.8 PK	74.0	-10.2	2.69 H	262	40.2	23.6
4	11650.00	50.5 AV	54.0	-3.5	2.69 H	262	26.9	23.6
5	#17475.00	-	-	-	-	-	-	-
6	#23300.00	-	-	-	-	-	-	-
7	#29125.00	-	-	-	-	-	-	-
8	#34950.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

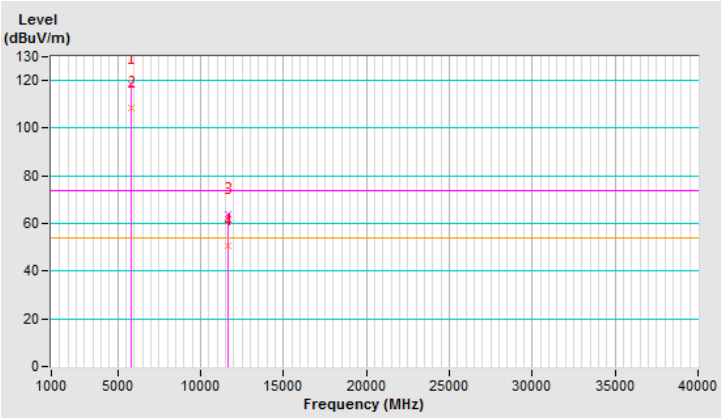


操 作 模 式 ：	發射	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 165：5825 MHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 03 月 12 日	測 試 者 ：	李哲銘

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5825.00	114.5 PK			2.44 V	25	71.9	42.6
2	*5825.00	104.6 AV			2.44 V	25	62.0	42.6
3	11650.00	63.3 PK	74.0	-10.7	2.30 V	215	39.7	23.6
4	11650.00	50.1 AV	54.0	-3.9	2.30 V	215	26.5	23.6
5	#17475.00	-	-	-	-	-	-	-
6	#23300.00	-	-	-	-	-	-	-
7	#29125.00	-	-	-	-	-	-	-
8	#34950.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

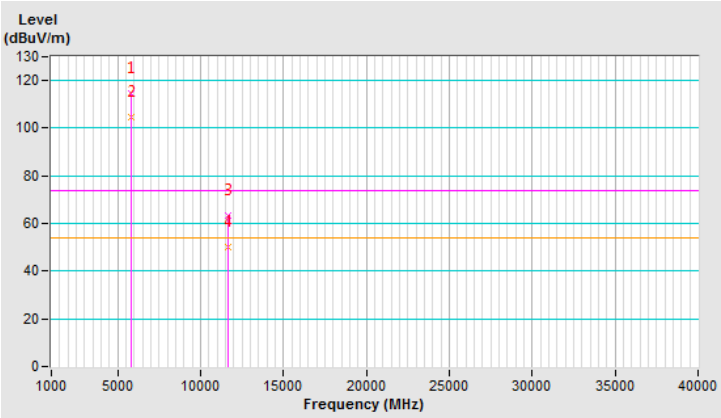


操 作 模 式 ：	發射	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 165：5825 MHz (OOBE)	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 03 月 12 日	測 試 者 ：	李哲銘

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5648.80	63.1 PK	68.2	-5.1	1.21 H	42	50.5	12.6
2	#5952.80	63.7 PK	68.2	-4.5	1.21 H	42	50.1	13.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

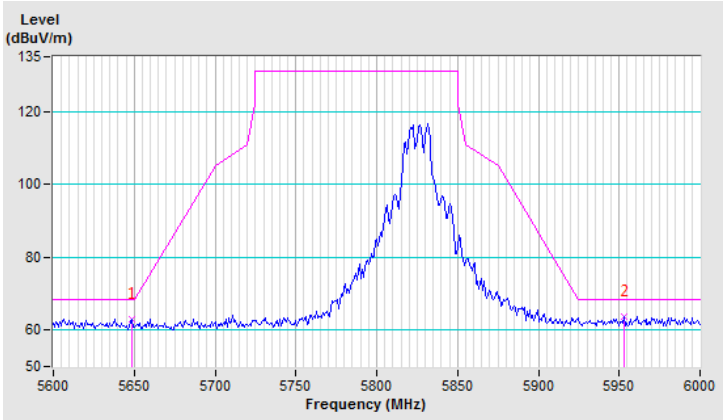


操 作 模 式 ：	發射	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 165：5825 MHz (OOBE)	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 03 月 12 日	測 試 者 ：	李哲銘

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5647.20	64.1 PK	68.2	-4.1	2.44 V	25	51.5	12.6
2	#5978.40	64.2 PK	68.2	-4.0	2.44 V	25	50.4	13.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

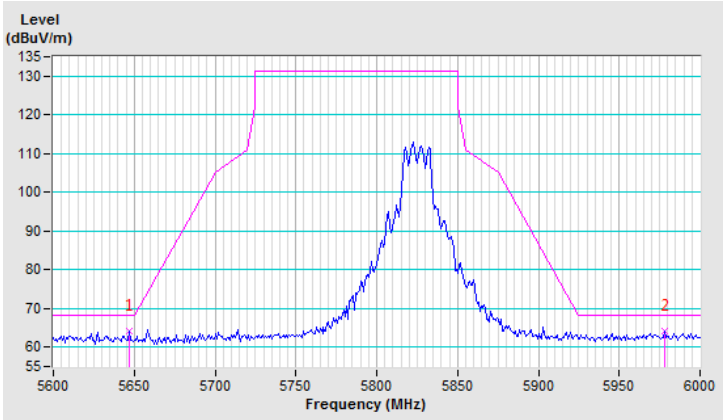

802.11ax (HE20)


操作模式：	發射	調變技術：	OFDMA-MIMO
基本波頻率：	CH 36：5180 MHz	測試儀器：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量測場地溫度：	25℃	量測場地濕度：	70%RH
測試日期：	108 年 03 月 12 日	測試者：	李哲銘

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	69.8 PK	74.0	-4.2	1.00 H	57	57.2	12.6
2	5150.00	53.0 AV	54.0	-1.0	1.00 H	57	40.4	12.6
3	*5180.00	114.6 PK			1.00 H	62	73.1	41.5
4	*5180.00	104.4 AV			1.00 H	62	62.9	41.5
5	#10360.00	63.0 PK	68.2	-5.2	1.99 H	142	40.5	22.5
6	15540.00	-	-	-	-	-	-	-
7	20720.00	-	-	-	-	-	-	-
8	#25900.00	-	-	-	-	-	-	-
9	#31080.00	-	-	-	-	-	-	-
10	#36260.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

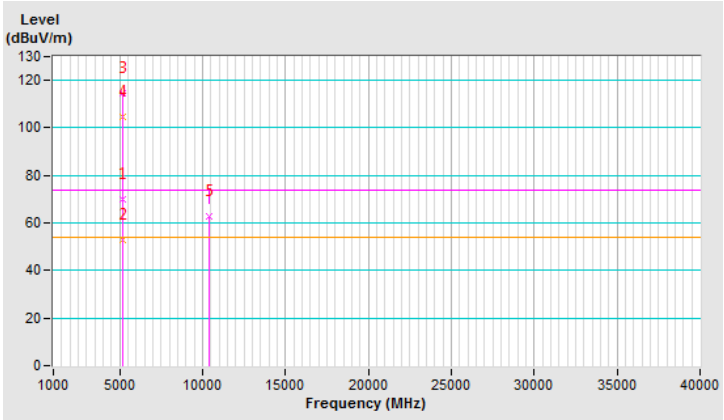


操作模式：	發射	調變技術：	OFDMA-MIMO
基本波頻率：	CH 36：5180 MHz	測試儀器：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量測場地溫度：	25℃	量測場地濕度：	70%RH
測試日期：	108 年 03 月 12 日	測試者：	李哲銘

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	62.8 PK	74.0	-11.2	1.08 V	300	50.2	12.6
2	5150.00	48.2 AV	54.0	-5.8	1.08 V	300	35.6	12.6
3	*5180.00	109.6 PK			1.02 V	326	68.1	41.5
4	*5180.00	99.4 AV			1.02 V	326	57.9	41.5
5	#10360.00	62.6 PK	68.2	-5.6	2.62 V	32	40.1	22.5
6	15540.00	-	-	-	-	-	-	-
7	20720.00	-	-	-	-	-	-	-
8	#25900.00	-	-	-	-	-	-	-
9	#31080.00	-	-	-	-	-	-	-
10	#36260.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

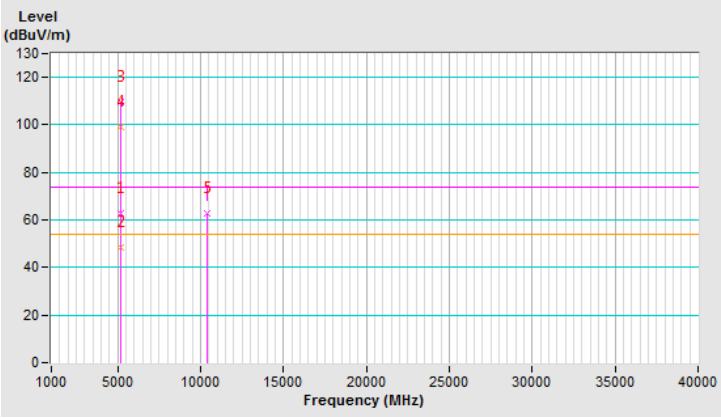


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA-MIMO
基 本 波 頻 率 ：	CH 40：5200 MHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 03 月 12 日	測 試 者 ：	李哲銘

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	69.9 PK	74.0	-4.1	1.00 H	53	57.3	12.6
2	5150.00	52.9 AV	54.0	-1.1	1.00 H	53	40.3	12.6
3	*5200.00	117.2 PK			1.00 H	55	75.7	41.5
4	*5200.00	107.3 AV			1.00 H	55	65.8	41.5
5	#10400.00	63.2 PK	68.2	-5.0	2.13 H	220	40.3	22.9
6	15600.00	-	-	-	-	-	-	-
7	20800.00	-	-	-	-	-	-	-
8	#26000.00	-	-	-	-	-	-	-
9	31200.00	-	-	-	-	-	-	-
10	#36400.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

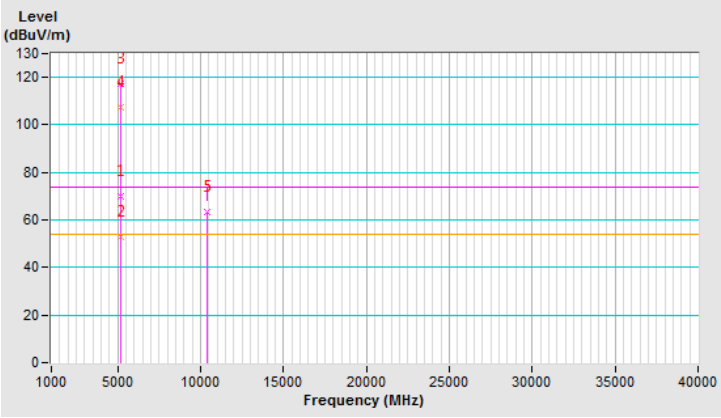


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA-MIMO
基 本 波 頻 率 ：	CH 40：5200 MHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 03 月 12 日	測 試 者 ：	李哲銘

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	63.0 PK	74.0	-11.0	1.05 V	322	50.4	12.6
2	5150.00	47.8 AV	54.0	-6.2	1.05 V	322	35.2	12.6
3	*5200.00	112.0 PK			1.03 V	329	70.5	41.5
4	*5200.00	102.1 AV			1.03 V	329	60.6	41.5
5	#10400.00	62.7 PK	68.2	-5.5	2.62 V	222	39.8	22.9
6	15600.00	-	-	-	-	-	-	-
7	20800.00	-	-	-	-	-	-	-
8	#26000.00	-	-	-	-	-	-	-
9	31200.00	-	-	-	-	-	-	-
10	#36400.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

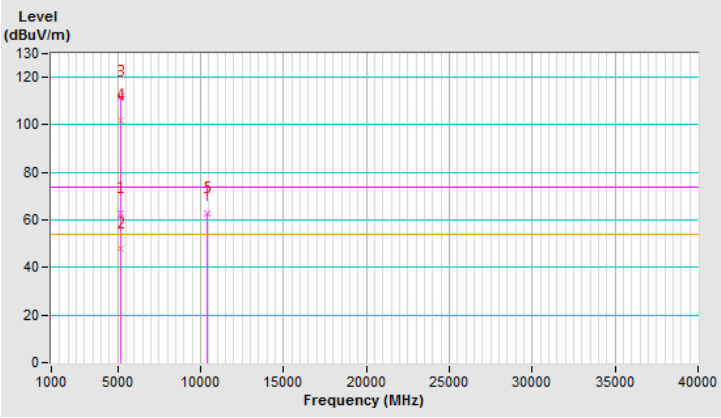


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA-MIMO
基 本 波 頻 率 ：	CH 48：5240 MHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 03 月 12 日	測 試 者 ：	李哲銘

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5240.00	117.8 PK			1.00 H	55	76.6	41.2
2	*5240.00	108.2 AV			1.00 H	55	67.0	41.2
3	5350.00	60.9 PK	74.0	-13.1	1.00 H	63	48.5	12.4
4	5350.00	49.1 AV	54.0	-4.9	1.00 H	63	36.7	12.4
5	#10480.00	63.4 PK	68.2	-4.8	2.03 H	175	40.6	22.8
6	15720.00	-	-	-	-	-	-	-
7	20960.00	-	-	-	-	-	-	-
8	#26200.00	-	-	-	-	-	-	-
9	31440.00	-	-	-	-	-	-	-
10	#36680.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

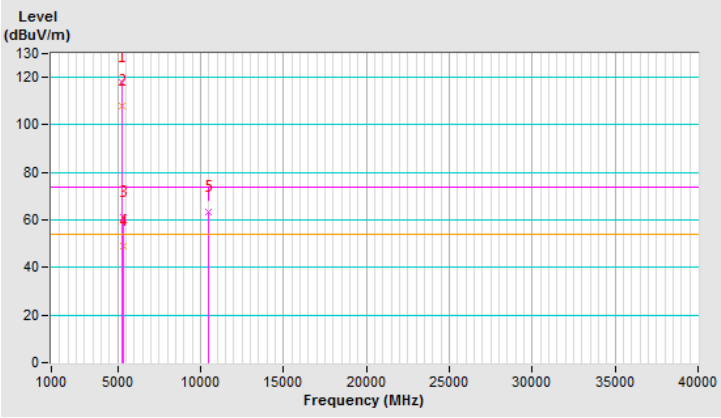


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA-MIMO
基 本 波 頻 率 ：	CH 48：5240 MHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 03 月 12 日	測 試 者 ：	李哲銘

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5240.00	112.8 PK			1.04 V	330	71.6	41.2
2	*5240.00	103.2 AV			1.04 V	330	62.0	41.2
3	5350.00	60.6 PK	74.0	-13.4	1.02 V	323	48.2	12.4
4	5350.00	47.6 AV	54.0	-6.4	1.02 V	323	35.2	12.4
5	#10480.00	63.0 PK	68.2	-5.2	2.09 V	66	40.2	22.8
6	15720.00	-	-	-	-	-	-	-
7	20960.00	-	-	-	-	-	-	-
8	#26200.00	-	-	-	-	-	-	-
9	31440.00	-	-	-	-	-	-	-
10	#36680.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

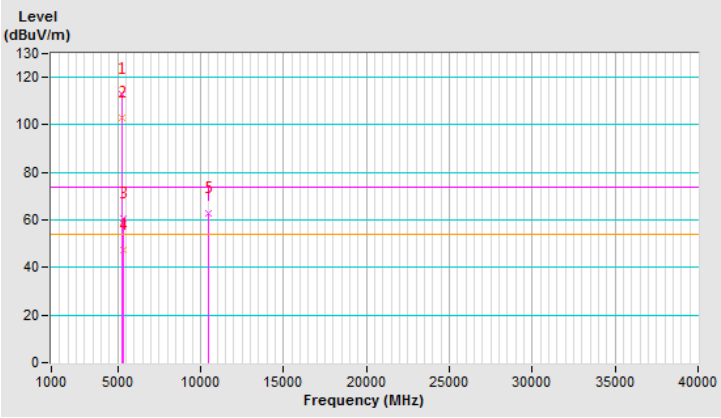


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA-MIMO
基 本 波 頻 率 ：	CH 149：5745 MHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 03 月 12 日	測 試 者 ：	李哲銘

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5745.00	119.3 PK			1.23 H	43	76.8	42.5
2	*5745.00	108.6 AV			1.23 H	43	66.1	42.5
3	11490.00	64.6 PK	74.0	-9.4	2.35 H	296	40.5	24.1
4	11490.00	51.0 AV	54.0	-3.0	2.35 H	296	26.9	24.1
5	#17235.00	-	-	-	-	-	-	-
6	22980.00	-	-	-	-	-	-	-
7	#28725.00	-	-	-	-	-	-	-
8	#34470.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

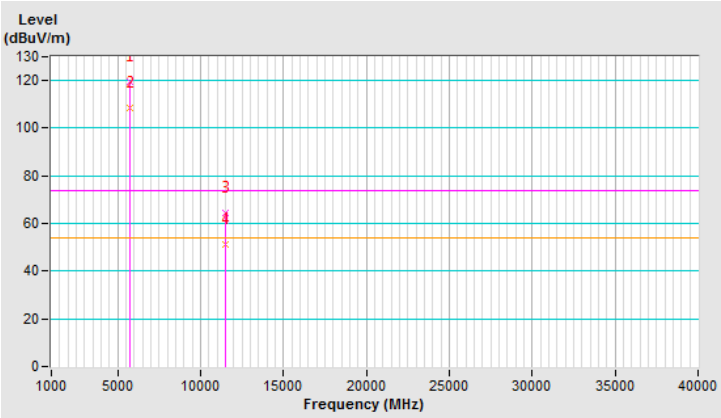


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA-MIMO
基 本 波 頻 率 ：	CH 149：5745 MHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 03 月 12 日	測 試 者 ：	李哲銘

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5745.00	115.3 PK			2.40 V	19	72.8	42.5
2	*5745.00	104.6 AV			2.40 V	19	62.1	42.5
3	11490.00	63.9 PK	74.0	-10.1	2.14 V	205	39.8	24.1
4	11490.00	50.6 AV	54.0	-3.4	2.14 V	205	26.5	24.1
5	#17235.00	-	-	-	-	-	-	-
6	22980.00	-	-	-	-	-	-	-
7	#28725.00	-	-	-	-	-	-	-
8	#34470.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

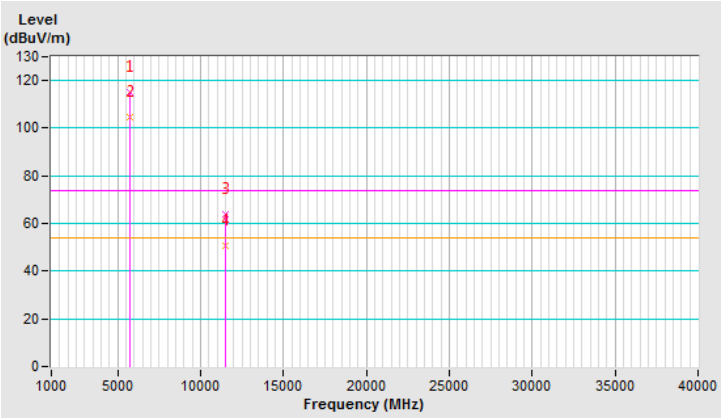


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA-MIMO
基 本 波 頻 率 ：	CH 149：5745 MHz (OOBE)	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 03 月 12 日	測 試 者 ：	李哲銘

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5628.80	64.6 PK	68.2	-3.6	1.23 H	43	51.9	12.7
2	#5961.60	65.2 PK	68.2	-3.0	1.23 H	43	51.5	13.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

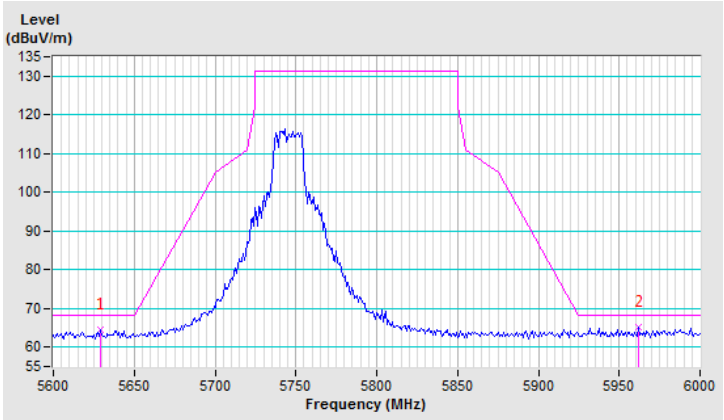


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA-MIMO
基 本 波 頻 率 ：	CH 149：5745 MHz (OOBE)	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 03 月 12 日	測 試 者 ：	李哲銘

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5632.80	63.1 PK	68.2	-5.1	2.40 V	19	50.4	12.7
2	#5979.20	63.5 PK	68.2	-4.7	2.40 V	19	49.7	13.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

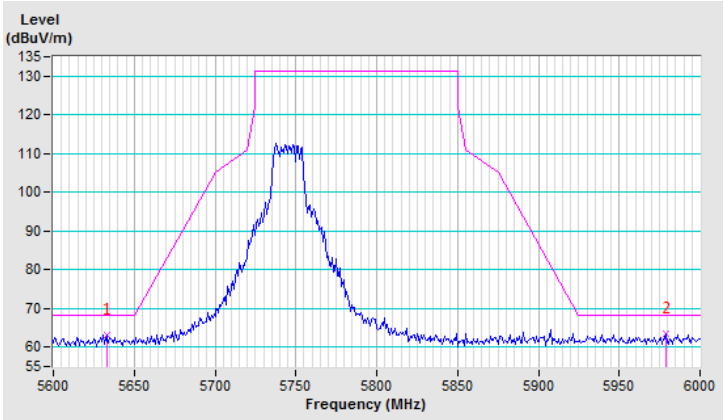


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA-MIMO
基 本 波 頻 率 ：	CH 157：5785 MHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 03 月 12 日	測 試 者 ：	李哲銘

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5785.00	119.0 PK			1.40 H	46	76.4	42.6
2	*5785.00	108.5 AV			1.40 H	46	65.9	42.6
3	11570.00	64.3 PK	74.0	-9.7	2.69 H	263	40.3	24.0
4	11570.00	50.7 AV	54.0	-3.3	2.69 H	263	26.7	24.0
5	#17355.00	-	-	-	-	-	-	-
6	#23140.00	-	-	-	-	-	-	-
7	#28925.00	-	-	-	-	-	-	-
8	#34710.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

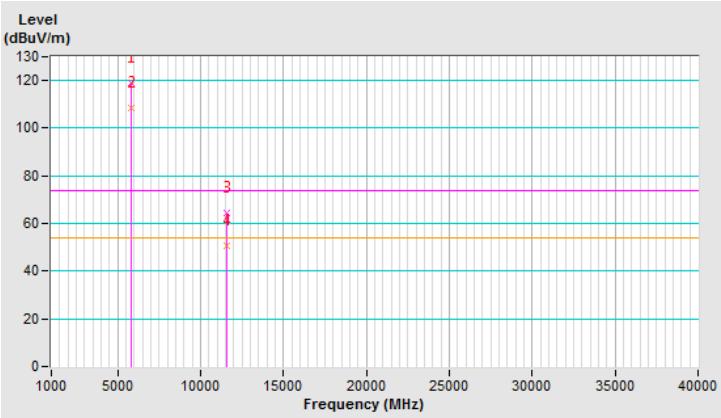


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA-MIMO
基 本 波 頻 率 ：	CH 157：5785 MHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 03 月 12 日	測 試 者 ：	李哲銘

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5785.00	115.0 PK			2.45 V	35	72.4	42.6
2	*5785.00	104.5 AV			2.45 V	35	61.9	42.6
3	11570.00	63.8 PK	74.0	-10.2	2.14 V	215	39.8	24.0
4	11570.00	50.3 AV	54.0	-3.7	2.14 V	215	26.3	24.0
5	#17355.00	-	-	-	-	-	-	-
6	#23140.00	-	-	-	-	-	-	-
7	#28925.00	-	-	-	-	-	-	-
8	#34710.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

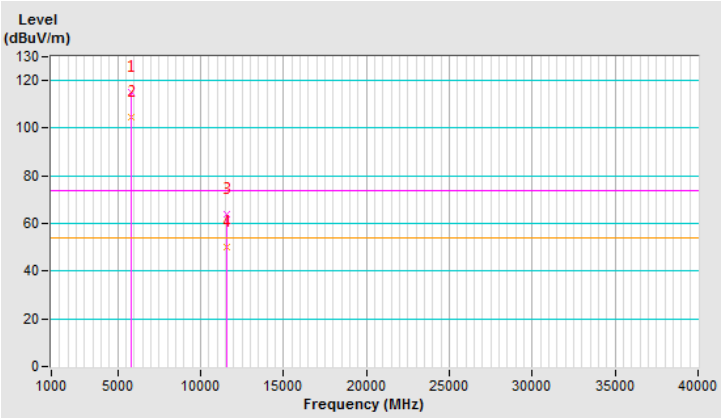


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA-MIMO
基 本 波 頻 率 ：	CH 157：5785 MHz (OOBE)	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 03 月 12 日	測 試 者 ：	李哲銘

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5647.20	64.7 PK	68.2	-3.5	1.40 H	46	52.1	12.6
2	#5988.00	64.3 PK	68.2	-3.9	1.40 H	46	50.5	13.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

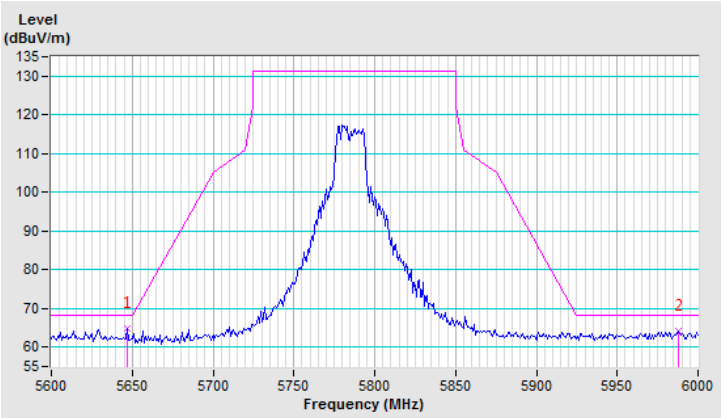


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA-MIMO
基 本 波 頻 率 ：	CH 157：5785 MHz (OOBE)	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 03 月 12 日	測 試 者 ：	李哲銘

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5633.60	64.3 PK	68.2	-3.9	2.45 V	35	51.6	12.7
2	#5995.20	64.0 PK	68.2	-4.2	2.45 V	35	50.2	13.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

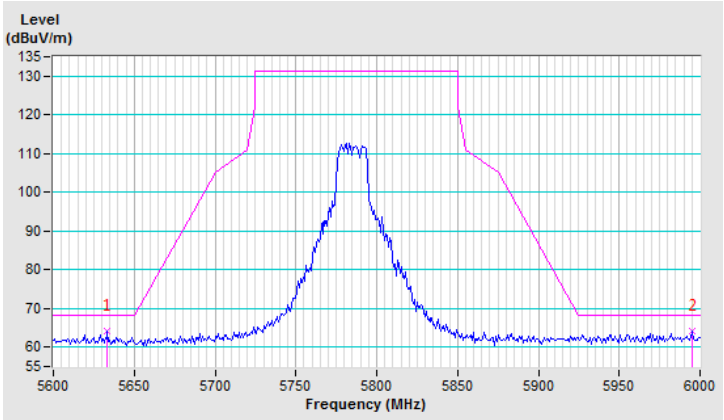


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA-MIMO
基 本 波 頻 率 ：	CH 165：5825 MHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 03 月 12 日	測 試 者 ：	李哲銘

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5825.00	118.4 PK			1.41 H	47	75.8	42.6
2	*5825.00	108.4 AV			1.41 H	47	65.8	42.6
3	11650.00	63.8 PK	74.0	-10.2	2.52 H	299	40.2	23.6
4	11650.00	50.4 AV	54.0	-3.6	2.52 H	299	26.8	23.6
5	#17475.00	-	-	-	-	-	-	-
6	#23300.00	-	-	-	-	-	-	-
7	#29125.00	-	-	-	-	-	-	-
8	#34950.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

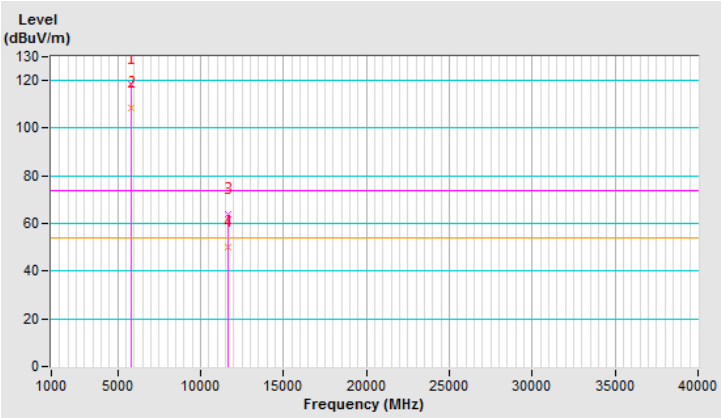


操作模式：	發射	調變技術：	OFDMA-MIMO
基本波頻率：	CH 165：5825 MHz	測試儀器：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量測場地溫度：	25℃	量測場地濕度：	70%RH
測試日期：	108 年 03 月 12 日	測試者：	李哲銘

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5825.00	114.4 PK			2.44 V	19	71.8	42.6
2	*5825.00	104.4 AV			2.44 V	19	61.8	42.6
3	11650.00	63.2 PK	74.0	-10.8	2.15 V	230	39.6	23.6
4	11650.00	49.9 AV	54.0	-4.1	2.15 V	230	26.3	23.6
5	#17475.00	-	-	-	-	-	-	-
6	#23300.00	-	-	-	-	-	-	-
7	#29125.00	-	-	-	-	-	-	-
8	#34950.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

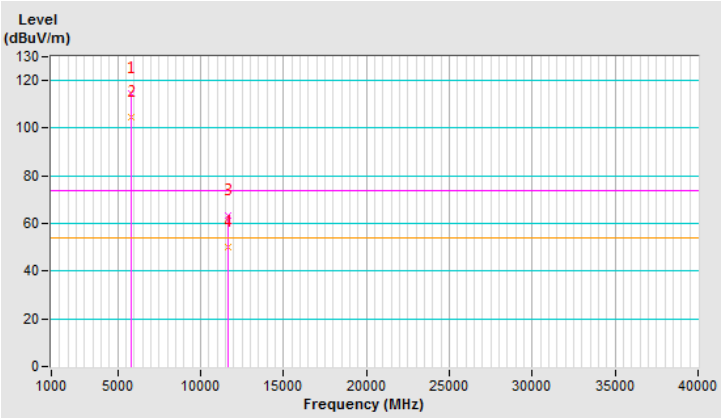


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA-MIMO
基 本 波 頻 率 ：	CH 165：5825 MHz (OOBE)	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 03 月 12 日	測 試 者 ：	李哲銘

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5607.20	64.4 PK	68.2	-3.8	1.41 H	47	51.7	12.7
2	#5976.80	64.8 PK	68.2	-3.4	1.41 H	47	51.0	13.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

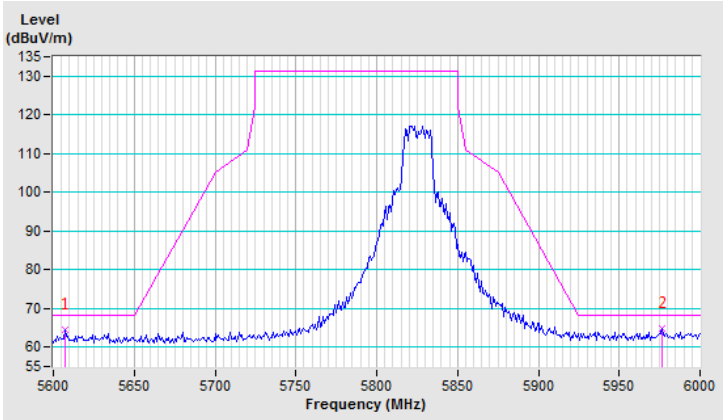


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA-MIMO
基 本 波 頻 率 ：	CH 165：5825 MHz (OOBE)	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 03 月 12 日	測 試 者 ：	李哲銘

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5627.20	62.9 PK	68.2	-5.3	2.44 V	19	50.2	12.7
2	#5994.40	64.2 PK	68.2	-4.0	2.44 V	19	50.4	13.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

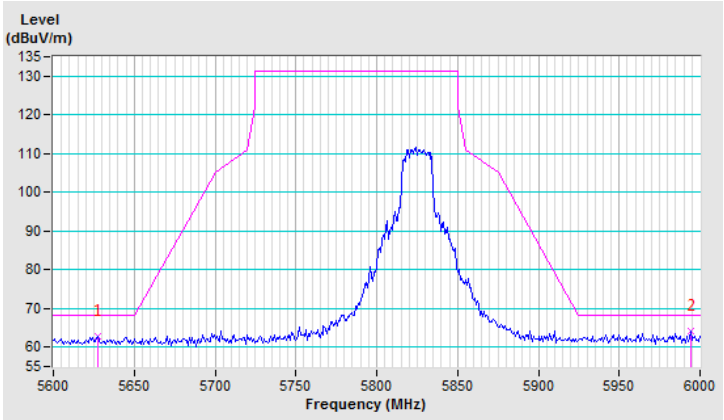


802.11ax (HE40)

操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA-MIMO
基 本 波 頻 率 ：	CH 38：5190 MHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=3kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 03 月 12 日	測 試 者 ：	李哲銘

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	68.7 PK	72.0	-3.3	1.05 H	57	56.1	12.6
2	5150.00	52.5 AV	54.0	-1.5	1.05 H	57	39.9	12.6
3	*5190.00	107.8 PK			1.00 H	58	66.3	41.5
4	*5190.00	98.1 AV			1.00 H	58	56.6	41.5
5	#10380.00	63.3 PK	68.2	-4.9	2.69 H	252	40.6	22.7
6	15570.00	-	-	-	-	-	-	-
7	20760.00	-	-	-	-	-	-	-
8	#25950.00	-	-	-	-	-	-	-
9	#31140.00	-	-	-	-	-	-	-
10	#36330.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

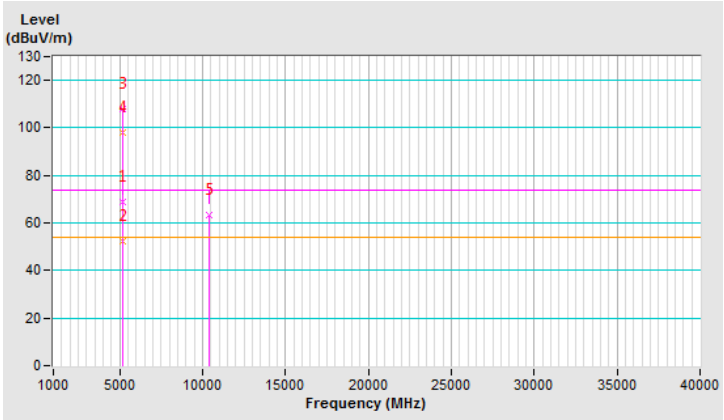


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA-MIMO
基 本 波 頻 率 ：	CH 38：5190 MHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=3kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 03 月 12 日	測 試 者 ：	李哲銘

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	62.1 PK	74.0	-11.9	1.00 V	322	49.5	12.6
2	5150.00	47.8 AV	54.0	-6.2	1.00 V	322	35.2	12.6
3	*5190.00	102.8 PK			1.00 V	333	61.3	41.5
4	*5190.00	93.1 AV			1.00 V	333	51.6	41.5
5	#10380.00	62.6 PK	68.2	-5.6	2.66 V	232	39.9	22.7
6	15570.00	-	-	-	-	-	-	-
7	20760.00	-	-	-	-	-	-	-
8	#25950.00	-	-	-	-	-	-	-
9	#31140.00	-	-	-	-	-	-	-
10	#36330.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

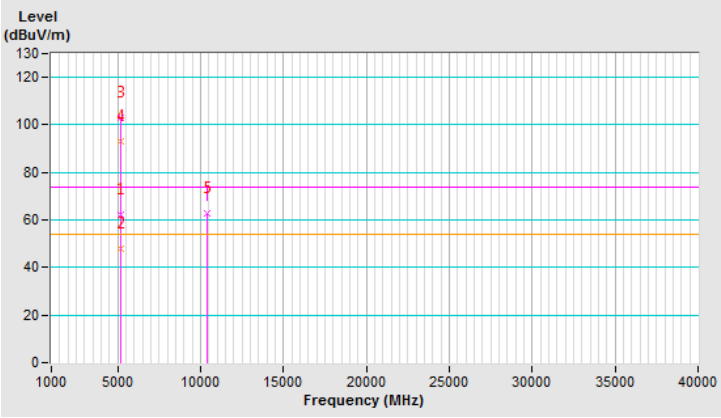


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA-MIMO
基 本 波 頻 率 ：	CH 46：5230 MHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=3kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 03 月 12 日	測 試 者 ：	李哲銘

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	65.8 PK	74.0	-8.2	1.20 H	57	53.2	12.6
2	5150.00	52.6 AV	54.0	-1.4	1.20 H	57	40.0	12.6
3	*5230.00	112.1 PK			1.15 H	50	70.8	41.3
4	*5230.00	102.5 AV			1.15 H	50	61.2	41.3
5	5350.00	61.2 PK	74.0	-12.8	1.21 H	50	48.8	12.4
6	5350.00	49.1 AV	54.0	-4.9	1.21 H	50	36.7	12.4
7	#10460.00	63.4 PK	68.2	-4.8	2.96 H	232	40.5	22.9
8	15690.00	-	-	-	-	-	-	-
9	20920.00	-	-	-	-	-	-	-
10	#26150.00	-	-	-	-	-	-	-
11	31380.00	-	-	-	-	-	-	-
12	#36610.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

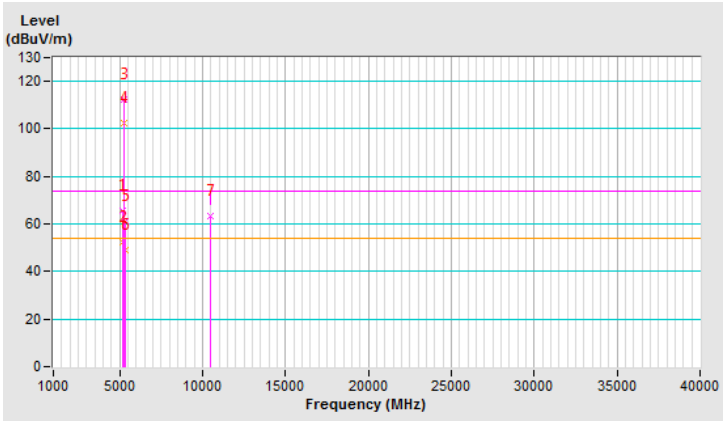


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA-MIMO
基 本 波 頻 率 ：	CH 46：5230 MHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=3kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 03 月 12 日	測 試 者 ：	李哲銘

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	62.7 PK	74.0	-11.3	1.05 V	321	50.1	12.6
2	5150.00	48.2 AV	54.0	-5.8	1.05 V	321	35.6	12.6
3	*5230.00	107.1 PK			1.11 V	303	65.8	41.3
4	*5230.00	97.5 AV			1.11 V	303	56.2	41.3
5	5350.00	60.6 PK	74.0	-13.4	1.29 V	303	48.2	12.4
6	5350.00	47.6 AV	54.0	-6.4	1.29 V	303	35.2	12.4
7	#10460.00	62.7 PK	68.2	-5.5	2.56 V	263	39.8	22.9
8	15690.00	-	-	-	-	-	-	-
9	20920.00	-	-	-	-	-	-	-
10	#26150.00	-	-	-	-	-	-	-
11	31380.00	-	-	-	-	-	-	-
12	#36610.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

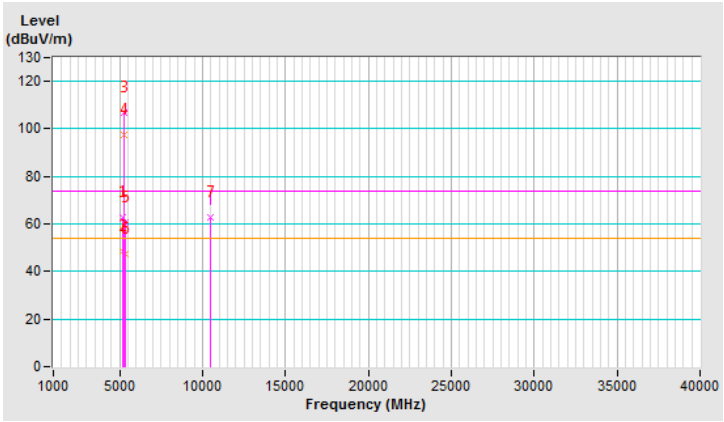


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA-MIMO
基 本 波 頻 率 ：	CH 151：5755 MHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=3kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 03 月 12 日	測 試 者 ：	李哲銘

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5755.00	115.4 PK			1.40 H	48	72.9	42.5
2	*5755.00	105.0 AV			1.40 H	48	62.5	42.5
3	11510.00	64.4 PK	74.0	-9.6	2.69 H	252	40.5	23.9
4	11510.00	50.9 AV	54.0	-3.1	2.69 H	252	27.0	23.9
5	#17265.00	-	-	-	-	-	-	-
6	23020.00	-	-	-	-	-	-	-
7	#28775.00	-	-	-	-	-	-	-
8	#34530.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

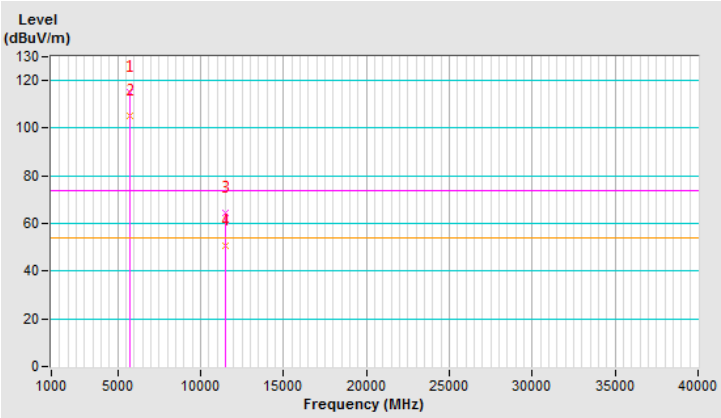


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA-MIMO
基 本 波 頻 率 ：	CH 151：5755 MHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=3kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 03 月 12 日	測 試 者 ：	李哲銘

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5755.00	111.4 PK			2.39 V	30	68.9	42.5
2	*5755.00	101.0 AV			2.39 V	30	58.5	42.5
3	11510.00	64.0 PK	74.0	-10.0	2.10 V	278	40.1	23.9
4	11510.00	50.6 AV	54.0	-3.4	2.10 V	278	26.7	23.9
5	#17265.00	-	-	-	-	-	-	-
6	23020.00	-	-	-	-	-	-	-
7	#28775.00	-	-	-	-	-	-	-
8	#34530.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

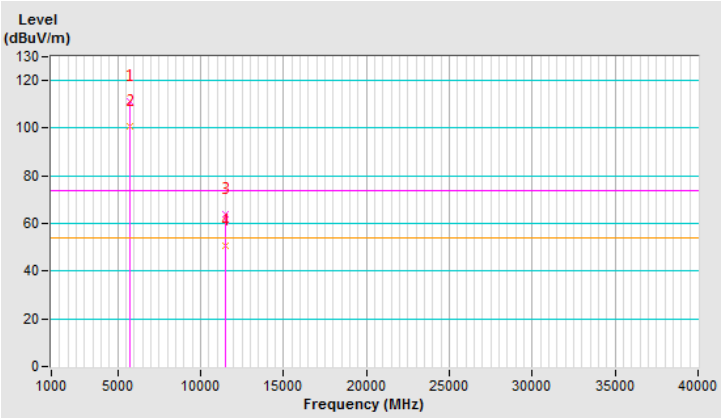


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA-MIMO
基 本 波 頻 率 ：	CH 151：5755 MHz (OOBE)	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=3kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 03 月 12 日	測 試 者 ：	李哲銘

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5648.00	65.0 PK	68.2	-3.2	1.40 H	48	52.4	12.6
2	#5988.00	64.0 PK	68.2	-4.2	1.40 H	48	50.2	13.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

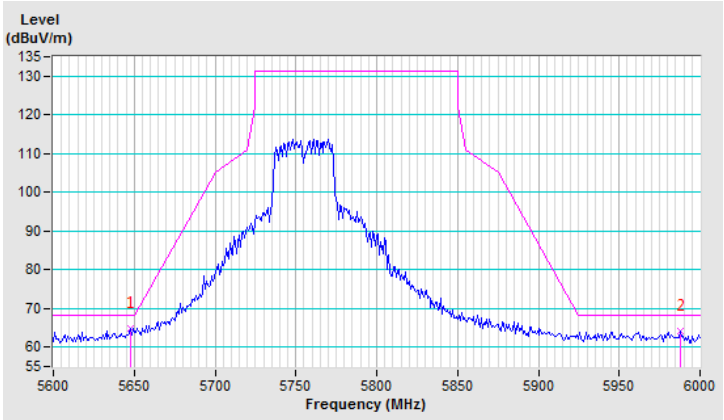


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA-MIMO
基 本 波 頻 率 ：	CH 151：5755 MHz (OOBE)	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=3kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 03 月 12 日	測 試 者 ：	李哲銘

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5651.20	64.1 PK	69.1	-5.0	2.39 V	30	51.5	12.6
2	#5992.00	63.4 PK	68.2	-4.8	2.39 V	30	49.6	13.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

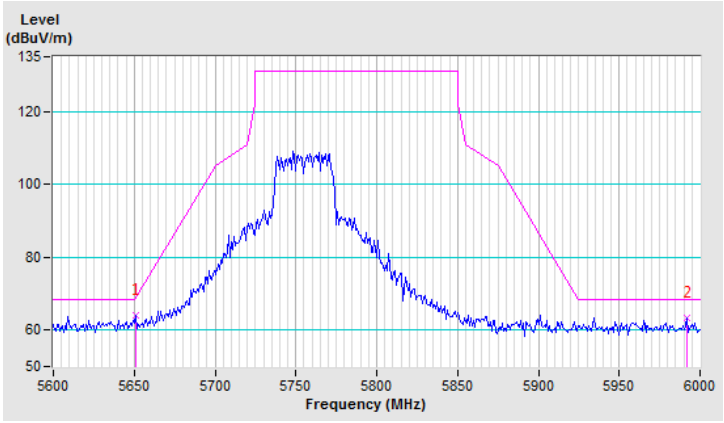


操作模式：	發射	調變技術：	OFDMA-MIMO
基本波頻率：	CH 159：5795 MHz	測試儀器：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=3kHz
量測場地溫度：	25℃	量測場地濕度：	70%RH
測試日期：	108 年 03 月 12 日	測試者：	李哲銘

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5795.00	115.3 PK			1.36 H	47	72.7	42.6
2	*5795.00	105.3 AV			1.36 H	47	62.7	42.6
3	11590.00	64.4 PK	74.0	-9.6	2.62 H	262	40.6	23.8
4	11590.00	51.0 AV	54.0	-3.0	2.62 H	262	27.2	23.8
5	#17385.00	-	-	-	-	-	-	-
6	#23180.00	-	-	-	-	-	-	-
7	#28975.00	-	-	-	-	-	-	-
8	#34770.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

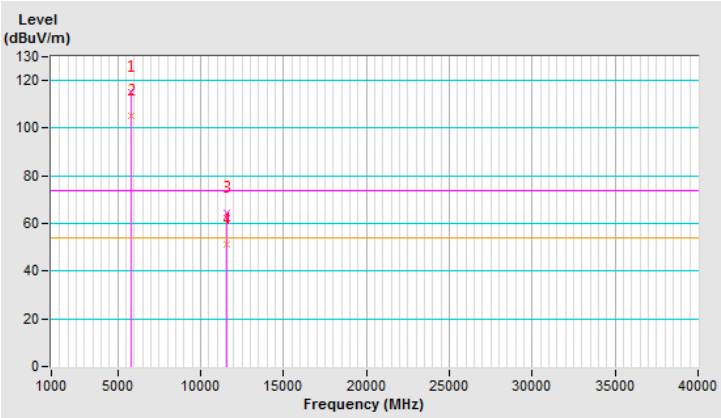


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA-MIMO
基 本 波 頻 率 ：	CH 159：5795 MHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=3kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 03 月 12 日	測 試 者 ：	李哲銘

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5795.00	111.3 PK			2.48 V	22	68.7	42.6
2	*5795.00	101.3 AV			2.48 V	22	58.7	42.6
3	11590.00	63.8 PK	74.0	-10.2	2.62 V	322	40.0	23.8
4	11590.00	50.6 AV	54.0	-3.4	2.62 V	322	26.8	23.8
5	#17385.00	-	-	-	-	-	-	-
6	#23180.00	-	-	-	-	-	-	-
7	#28975.00	-	-	-	-	-	-	-
8	#34770.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

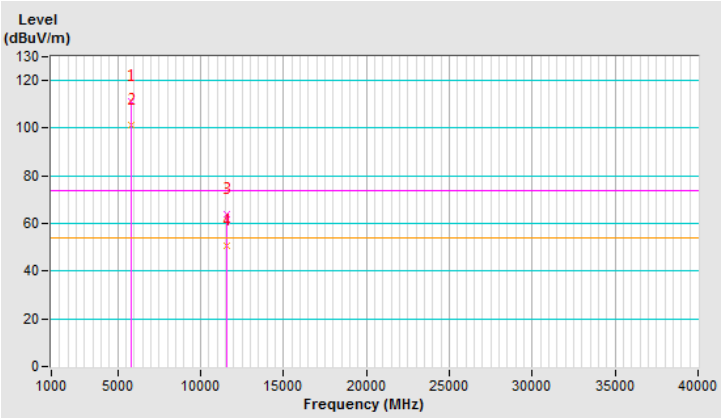


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA-MIMO
基 本 波 頻 率 ：	CH 159：5795 MHz (OOBE)	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=3kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 03 月 12 日	測 試 者 ：	李哲銘

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5644.80	63.4 PK	68.2	-4.8	1.36 H	47	50.7	12.7
2	#5926.40	65.4 PK	68.2	-2.8	1.36 H	47	51.8	13.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

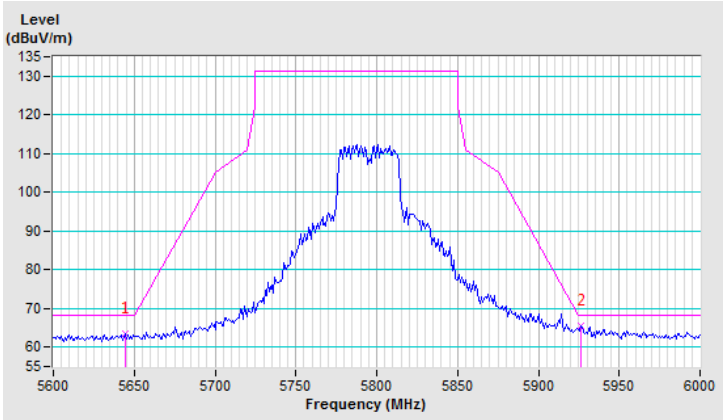


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA-MIMO
基 本 波 頻 率 ：	CH 159：5795 MHz (OOBE)	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=3kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 03 月 12 日	測 試 者 ：	李哲銘

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5628.80	63.8 PK	68.2	-4.4	2.48 V	22	51.1	12.7
2	#5975.20	65.1 PK	68.2	-3.1	2.48 V	22	51.3	13.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

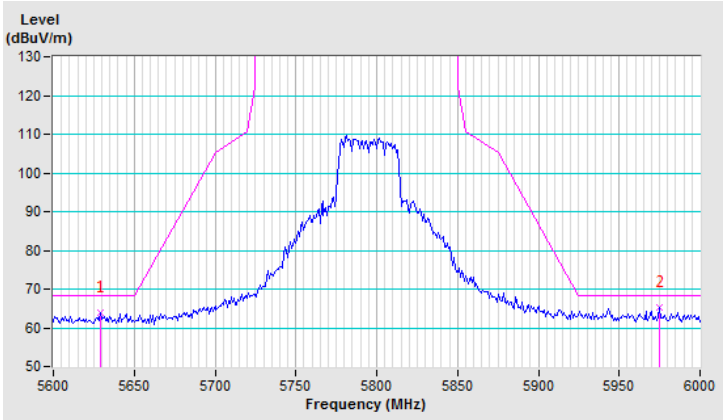


802.11ax (HE80)

操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA-MIMO
基 本 波 頻 率 ：	CH 42：5210 MHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=3kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 03 月 12 日	測 試 者 ：	李哲銘

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	69.1 PK	74.0	-4.9	1.20 H	52	56.5	12.6
2	5150.00	52.9 AV	54.0	-1.1	1.20 H	52	40.3	12.6
3	*5210.00	101.4 PK			1.15 H	44	60.0	41.4
4	*5210.00	91.8 AV			1.15 H	44	50.4	41.4
5	5350.00	61.3 PK	74.0	-12.7	1.22 H	58	48.9	12.4
6	5350.00	48.4 AV	54.0	-5.6	1.22 H	58	36.0	12.4
7	#10420.00	63.3 PK	68.2	-4.9	2.58 H	54	40.5	22.8
8	15630.00	-	-	-	-	-	-	-
9	20840.00	-	-	-	-	-	-	-
10	#26050.00	-	-	-	-	-	-	-
11	31260.00	-	-	-	-	-	-	-
12	36470.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

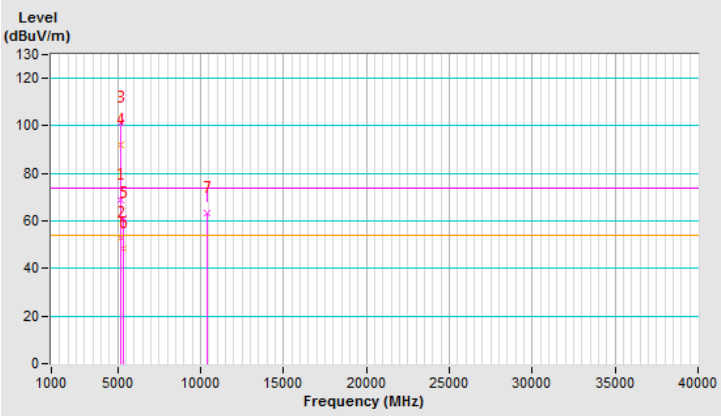


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA-MIMO
基 本 波 頻 率 ：	CH 42：5210 MHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=3kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 03 月 12 日	測 試 者 ：	李哲銘

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	63.3 PK	74.0	-10.7	1.02 V	325	50.7	12.6
2	5150.00	48.2 AV	54.0	-5.8	1.02 V	325	35.6	12.6
3	*5210.00	96.6 PK			1.00 V	333	55.2	41.4
4	*5210.00	86.3 AV			1.00 V	333	44.9	41.4
5	5350.00	61.4 PK	74.0	-12.6	1.03 V	309	49.0	12.4
6	5350.00	47.5 AV	54.0	-6.5	1.03 V	309	35.1	12.4
7	#10420.00	63.0 PK	68.2	-5.2	2.59 V	266	40.2	22.8
8	15630.00	-	-	-	-	-	-	-
9	20840.00	-	-	-	-	-	-	-
10	#26050.00	-	-	-	-	-	-	-
11	31260.00	-	-	-	-	-	-	-
12	36470.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

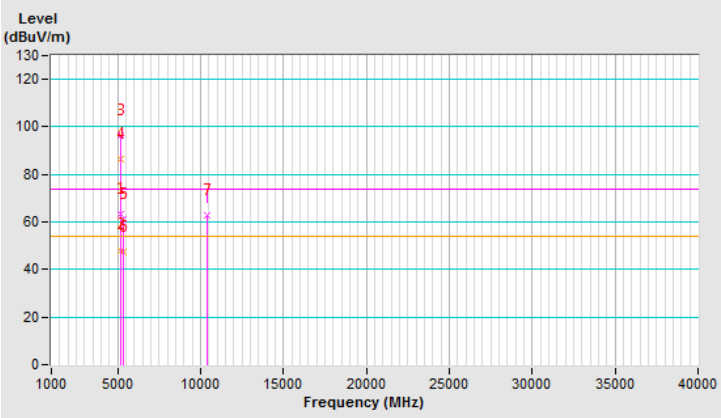


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA-MIMO
基 本 波 頻 率 ：	CH 155：5775 MHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=3kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 03 月 12 日	測 試 者 ：	李哲銘

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5647.20	64.4 PK	68.2	-3.8	1.23 H	40	51.8	12.6
2	*5775.00	109.2 PK			1.39 H	46	66.6	42.6
3	*5775.00	99.2 AV			1.39 H	46	56.6	42.6
4	#5929.60	66.8 PK	68.2	-1.4	1.45 H	52	53.2	13.6
5	11550.00	64.0 PK	74.0	-10.0	2.63 H	269	40.1	23.9
6	11550.00	50.5 AV	54.0	-3.5	2.63 H	269	26.6	23.9
7	#17325.00	-	-	-	-	-	-	-
8	23100.00	-	-	-	-	-	-	-
9	#28875.00	-	-	-	-	-	-	-
10	#34650.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

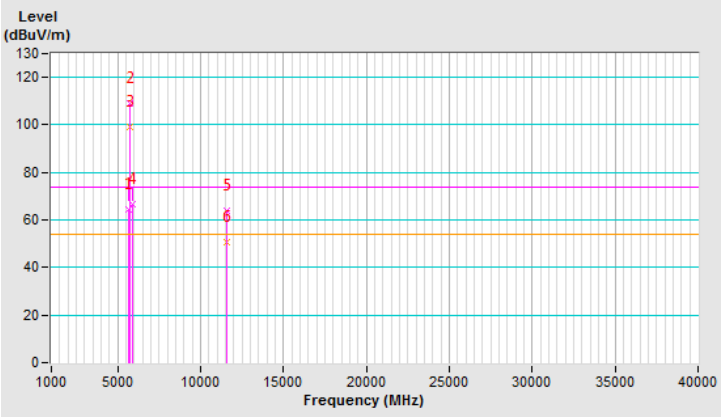


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA-MIMO
基 本 波 頻 率 ：	CH 155：5775 MHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=3kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 03 月 12 日	測 試 者 ：	李哲銘

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5648.00	65.7 PK	68.2	-2.5	2.41 V	26	53.1	12.6
2	*5775.00	105.2 PK			2.40 V	25	62.6	42.6
3	*5775.00	95.2 AV			2.40 V	25	52.6	42.6
4	#5947.20	65.0 PK	68.2	-3.2	2.44 V	32	51.4	13.6
5	11550.00	63.7 PK	74.0	-10.3	2.65 V	210	39.8	23.9
6	11550.00	50.2 AV	54.0	-3.8	2.65 V	210	26.3	23.9
7	#17325.00	-	-	-	-	-	-	-
8	23100.00	-	-	-	-	-	-	-
9	#28875.00	-	-	-	-	-	-	-
10	#34650.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

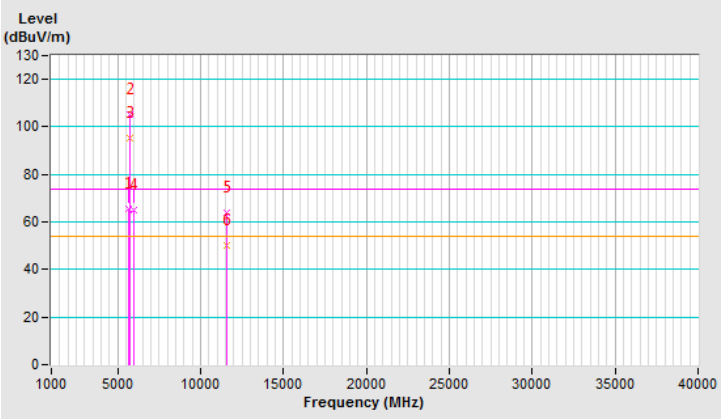


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA-MIMO
基 本 波 頻 率 ：	CH 155：5775 MHz (OOBE)	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=3kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 03 月 12 日	測 試 者 ：	李哲銘

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5647.20	65.1 PK	68.2	-3.1	1.33 H	45	52.5	12.6
2	#5929.60	66.1 PK	68.2	-2.1	1.33 H	45	52.5	13.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

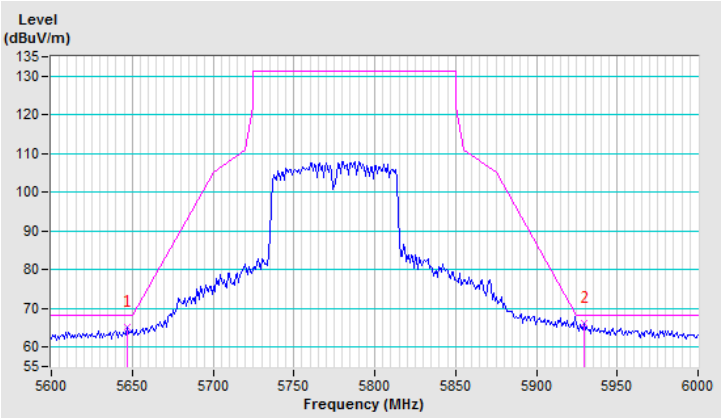


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA-MIMO
基 本 波 頻 率 ：	CH 155：5775 MHz (OOBE)	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=3kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 03 月 12 日	測 試 者 ：	李哲銘

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5648.00	65.0 PK	68.2	-3.2	2.40 V	25	52.4	12.6
2	#5947.20	64.4 PK	68.2	-3.8	2.40 V	25	50.8	13.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

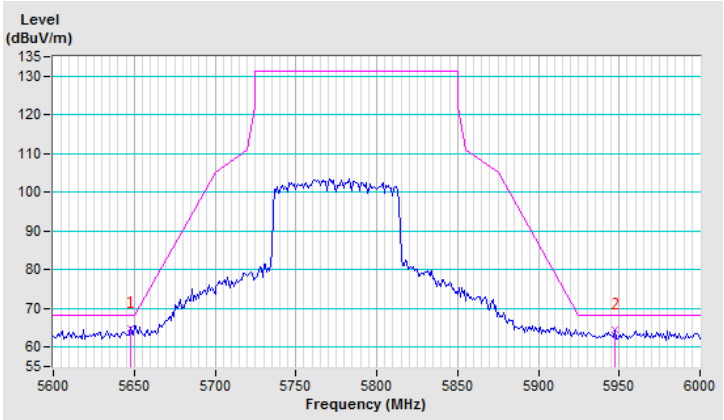

Test Mode K - AP43E (External antenna – PN: ATS-OP-245-810-4RPSP-36) + Eth6 Radio + POE

1TX


802.11a

操作模式：	發射	調變技術：	OFDM
基本波頻率：	CH 36：5180 MHz	測試儀器：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量測場地溫度：	25℃	量測場地濕度：	70%RH
測試日期：	108 年 08 月 14 日	測試者：	張家誠

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	68.1 PK	74.0	-5.9	2.03 H	111	62.7	5.4
2	5150.00	51.6 AV	54.0	-2.4	2.03 H	111	46.2	5.4
3	*5180.00	108.0 PK			2.03 H	102	71.3	36.7
4	*5180.00	98.9 AV			2.03 H	102	62.2	36.7
5	#10360.00	62.3 PK	68.2	-5.9	3.09 H	316	47.0	15.3
6	15540.00	-	-	-	-	-	-	-
7	20720.00	-	-	-	-	-	-	-
8	#25900.00	-	-	-	-	-	-	-
9	#31080.00	-	-	-	-	-	-	-
10	#36260.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

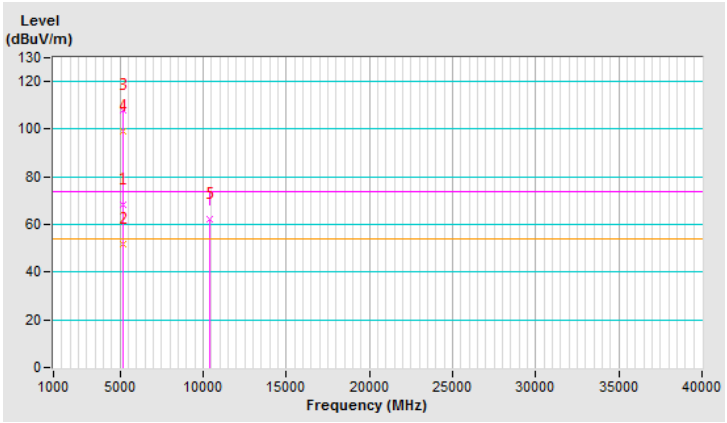


操 作 模 式 ：	發射	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 36：5180 MHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 08 月 14 日	測 試 者 ：	張家誠

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	68.9 PK	74.0	-5.1	3.21 V	8	63.5	5.4
2	5150.00	52.8 AV	54.0	-1.2	3.21 V	8	47.4	5.4
3	*5180.00	109.0 PK			3.22 V	4	72.3	36.7
4	*5180.00	99.9 AV			3.22 V	4	63.2	36.7
5	#10360.00	62.8 PK	68.2	-5.4	2.55 V	222	47.5	15.3
6	15540.00	-	-	-	-	-	-	-
7	20720.00	-	-	-	-	-	-	-
8	#25900.00	-	-	-	-	-	-	-
9	#31080.00	-	-	-	-	-	-	-
10	#36260.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

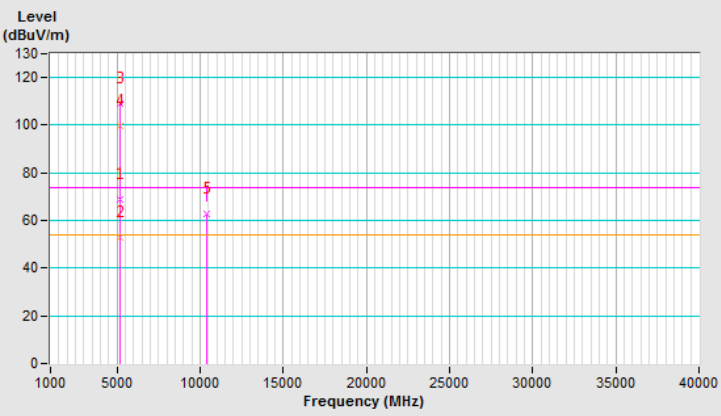


操 作 模 式 ：	發射	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 40：5200 MHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 08 月 14 日	測 試 者 ：	張家誠

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5200.00	109.8 PK			2.69 H	103	73.1	36.7
2	*5200.00	99.9 AV			2.69 H	103	63.2	36.7
3	#10400.00	62.8 PK	68.2	-5.4	1.59 H	163	47.2	15.6
4	15600.00	-	-	-	-	-	-	-
5	20800.00	-	-	-	-	-	-	-
6	#26000.00	-	-	-	-	-	-	-
7	31200.00	-	-	-	-	-	-	-
8	#36400.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

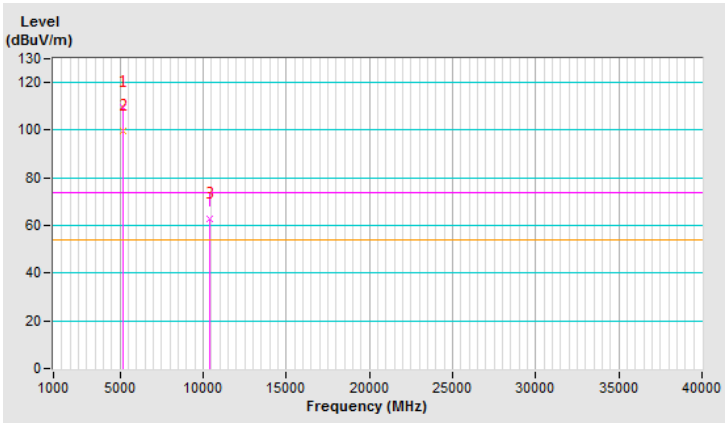


操 作 模 式 ：	發射	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 40：5200 MHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 08 月 14 日	測 試 者 ：	張家誠

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5200.00	110.8 PK			3.26 V	12	74.1	36.7
2	*5200.00	100.9 AV			3.26 V	12	64.2	36.7
3	#10400.00	63.2 PK	68.2	-5.0	2.99 V	263	47.6	15.6
4	15600.00	-	-	-	-	-	-	-
5	20800.00	-	-	-	-	-	-	-
6	#26000.00	-	-	-	-	-	-	-
7	31200.00	-	-	-	-	-	-	-
8	#36400.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

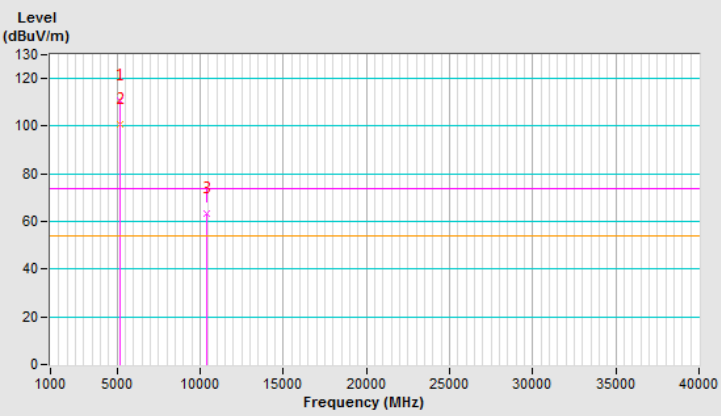


操 作 模 式 ：	發射	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 48：5240 MHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 08 月 14 日	測 試 者 ：	張家誠

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5240.00	111.5 PK			2.20 H	105	75.1	36.4
2	*5240.00	101.5 AV			2.20 H	105	65.1	36.4
3	5350.00	60.9 PK	74.0	-13.1	2.62 H	104	55.7	5.2
4	5350.00	47.8 AV	54.0	-6.2	2.62 H	104	42.6	5.2
5	#10480.00	63.7 PK	68.2	-4.5	1.51 H	109	48.2	15.5
6	15720.00	-	-	-	-	-	-	-
7	20960.00	-	-	-	-	-	-	-
8	#26200.00	-	-	-	-	-	-	-
9	31440.00	-	-	-	-	-	-	-
10	#36680.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

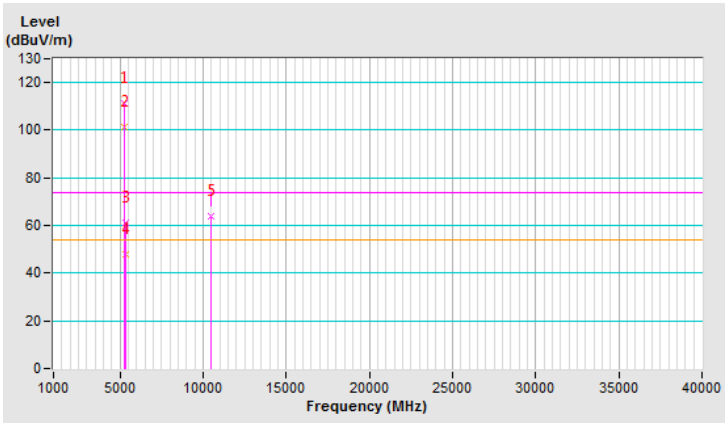


操 作 模 式 ：	發射	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 48：5240 MHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 08 月 14 日	測 試 者 ：	張家誠

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5240.00	112.5 PK			3.39 V	6	76.1	36.4
2	*5240.00	102.5 AV			3.39 V	6	66.1	36.4
3	5350.00	61.1 PK	74.0	-12.9	3.22 V	4	55.9	5.2
4	5350.00	48.0 AV	54.0	-6.0	3.22 V	4	42.8	5.2
5	#10480.00	63.9 PK	68.2	-4.3	2.02 V	211	48.4	15.5
6	15720.00	-	-	-	-	-	-	-
7	20960.00	-	-	-	-	-	-	-
8	#26200.00	-	-	-	-	-	-	-
9	31440.00	-	-	-	-	-	-	-
10	#36680.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

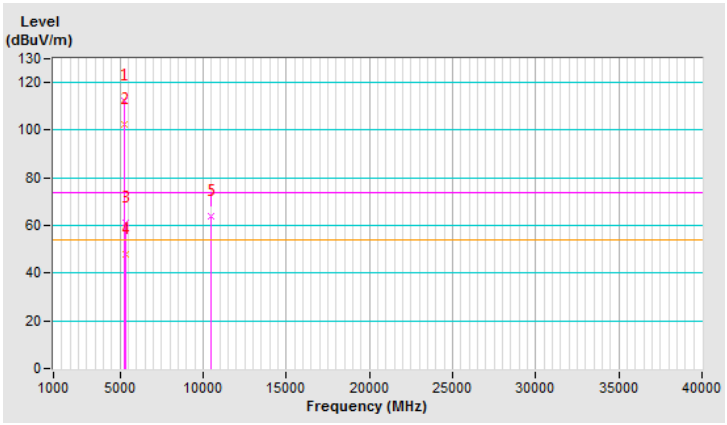


操作模式：	發射	調變技術：	OFDM
基本波頻率：	CH 149：5745 MHz	測試儀器：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量測場地溫度：	25℃	量測場地濕度：	70%RH
測試日期：	108 年 08 月 26 日	測試者：	張家誠

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5745.00	109.1 PK			1.00 H	345	71.7	37.4
2	*5745.00	98.5 AV			1.00 H	345	61.1	37.4
3	11490.00	63.9 PK	74.0	-10.1	3.09 H	211	46.4	17.5
4	11490.00	50.0 AV	54.0	-4.0	3.09 H	211	32.5	17.5
5	#17235.00	-	-	-	-	-	-	-
6	22980.00	-	-	-	-	-	-	-
7	#28725.00	-	-	-	-	-	-	-
8	#34470.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

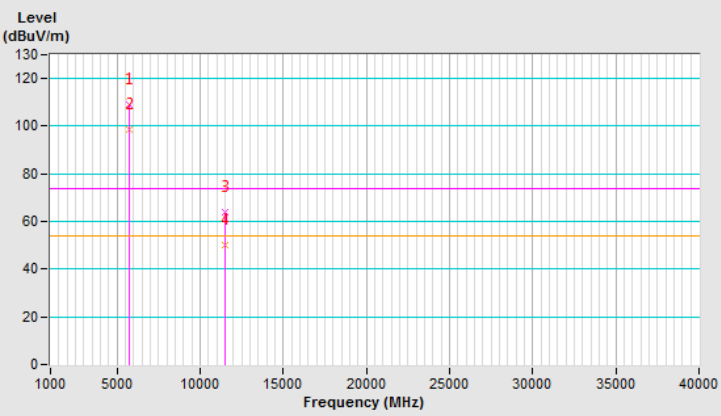


操 作 模 式 ：	發射	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 149：5745 MHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 08 月 14 日	測 試 者 ：	張家誠

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5745.00	110.1 PK			2.57 V	25	72.7	37.4
2	*5745.00	99.5 AV			2.57 V	25	62.1	37.4
3	11490.00	64.2 PK	74.0	-9.8	3.06 V	311	46.7	17.5
4	11490.00	50.3 AV	54.0	-3.7	3.06 V	311	32.8	17.5
5	#17235.00	-	-	-	-	-	-	-
6	22980.00	-	-	-	-	-	-	-
7	#28725.00	-	-	-	-	-	-	-
8	#34470.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

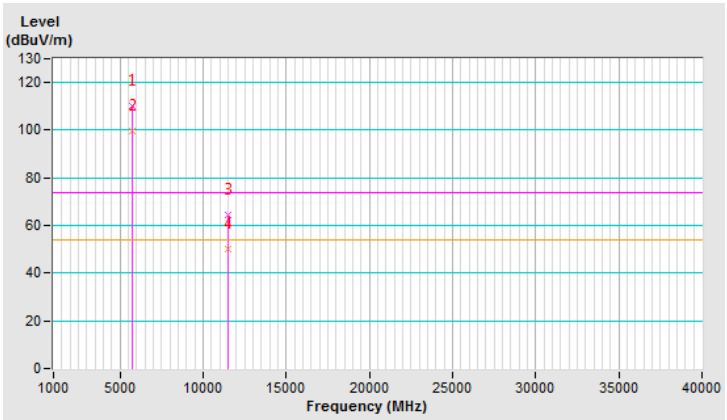


操 作 模 式 ：	發射	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 149：5745 MHz (OOBE)	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 08 月 26 日	測 試 者 ：	張家誠

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5601.60	61.7 PK	68.2	-6.5	1.00 H	345	56.1	5.6
2	#5990.40	61.8 PK	68.2	-6.4	1.00 H	345	55.4	6.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

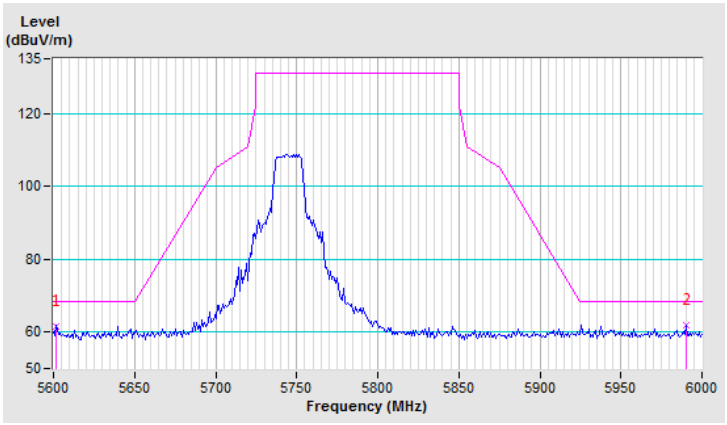


操 作 模 式 ：	發射	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 149：5745 MHz (OOBE)	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 08 月 14 日	測 試 者 ：	張家誠

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5631.20	61.5 PK	68.2	-6.7	2.57 V	25	55.9	5.6
2	#5998.40	62.1 PK	68.2	-6.1	2.57 V	25	55.7	6.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

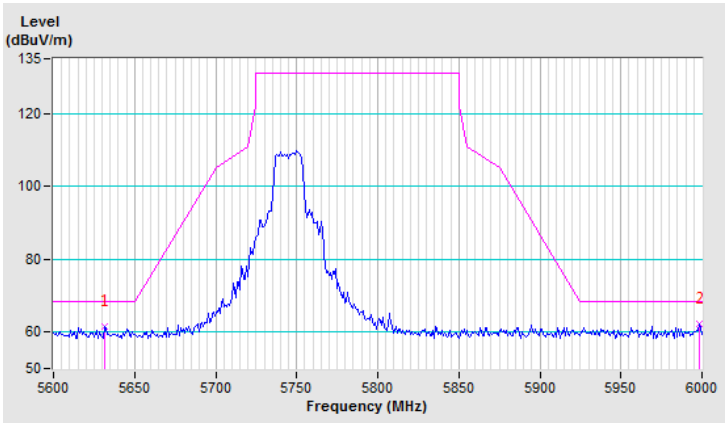


操作模式：	發射	調變技術：	OFDM
基本波頻率：	CH 157：5785 MHz	測試儀器：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量測場地溫度：	25℃	量測場地濕度：	70%RH
測試日期：	108 年 08 月 26 日	測試者：	張家誠

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5785.00	109.3 PK			1.00 H	343	72.0	37.3
2	*5785.00	99.0 AV			1.00 H	343	61.7	37.3
3	11570.00	63.7 PK	74.0	-10.3	2.11 H	152	46.2	17.5
4	11570.00	50.0 AV	54.0	-4.0	2.11 H	152	32.5	17.5
5	#17355.00	-	-	-	-	-	-	-
6	#23140.00	-	-	-	-	-	-	-
7	#28925.00	-	-	-	-	-	-	-
8	#34710.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

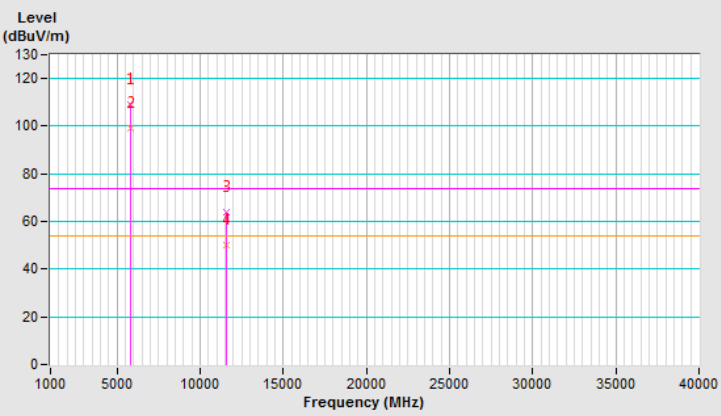


操 作 模 式 ：	發射	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 157：5785 MHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 08 月 14 日	測 試 者 ：	張家誠

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5785.00	110.4 PK			2.55 V	20	73.1	37.3
2	*5785.00	100.1 AV			2.55 V	20	62.8	37.3
3	11570.00	64.2 PK	74.0	-9.8	2.69 V	233	46.7	17.5
4	11570.00	50.4 AV	54.0	-3.6	2.69 V	233	32.9	17.5
5	#17355.00	-	-	-	-	-	-	-
6	#23140.00	-	-	-	-	-	-	-
7	#28925.00	-	-	-	-	-	-	-
8	#34710.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

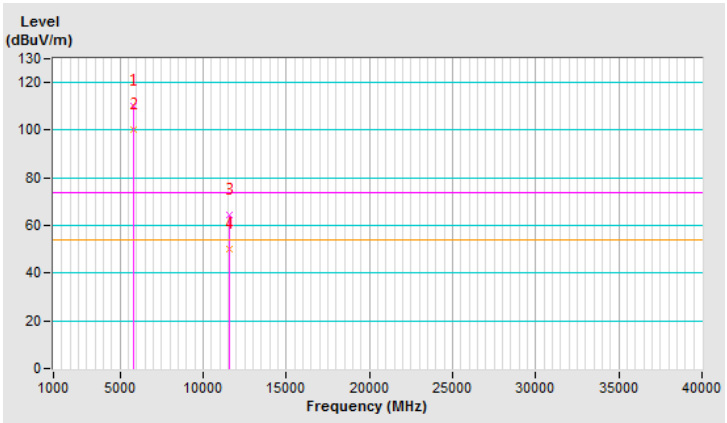


操 作 模 式 ：	發射	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 157：5785 MHz (OOBE)	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 08 月 26 日	測 試 者 ：	張家誠

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5619.20	61.7 PK	68.2	-6.5	1.00 H	343	56.1	5.6
2	#5939.20	61.6 PK	68.2	-6.6	1.00 H	343	55.2	6.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

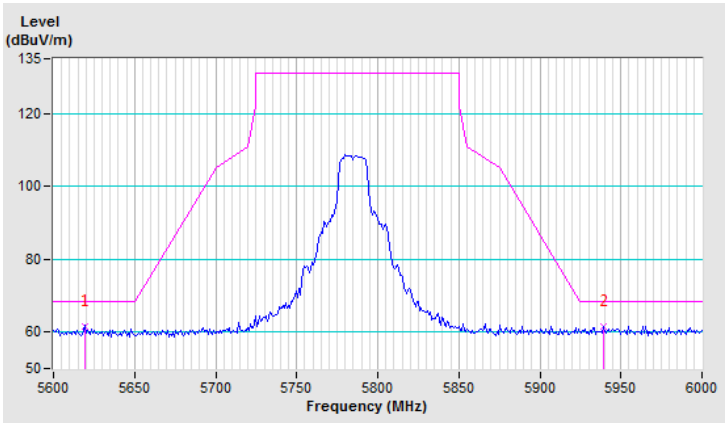


操 作 模 式 ：	發射	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 157：5785 MHz (OOBE)	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 08 月 14 日	測 試 者 ：	張家誠

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5620.00	62.1 PK	68.2	-6.1	2.55 V	20	56.5	5.6
2	#5941.60	62.8 PK	68.2	-5.4	2.55 V	20	56.4	6.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

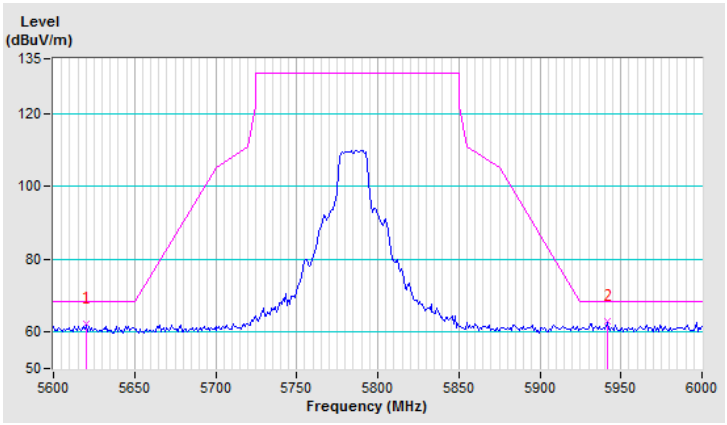


操 作 模 式 ：	發射	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 165：5825 MHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 08 月 26 日	測 試 者 ：	張家誠

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5825.00	108.9 PK			1.02 H	344	71.5	37.4
2	*5825.00	98.7 AV			1.02 H	344	61.3	37.4
3	11650.00	63.0 PK	74.0	-11.0	2.99 H	222	46.0	17.0
4	11650.00	49.6 AV	54.0	-4.4	2.99 H	222	32.6	17.0
5	#17475.00	-	-	-	-	-	-	-
6	#23300.00	-	-	-	-	-	-	-
7	#29125.00	-	-	-	-	-	-	-
8	#34950.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

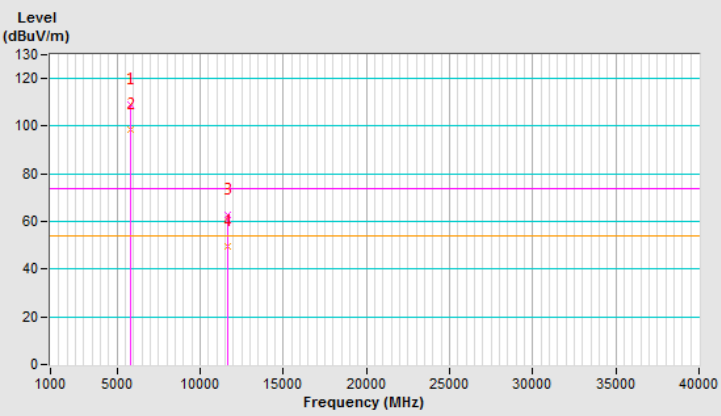


操 作 模 式 ：	發射	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 165：5825 MHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 08 月 14 日	測 試 者 ：	張家誠

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5825.00	110.1 PK			2.57 V	26	72.7	37.4
2	*5825.00	99.9 AV			2.57 V	26	62.5	37.4
3	11650.00	63.7 PK	74.0	-10.3	3.26 V	333	46.7	17.0
4	11650.00	49.8 AV	54.0	-4.2	3.26 V	333	32.8	17.0
5	#17475.00	-	-	-	-	-	-	-
6	#23300.00	-	-	-	-	-	-	-
7	#29125.00	-	-	-	-	-	-	-
8	#34950.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

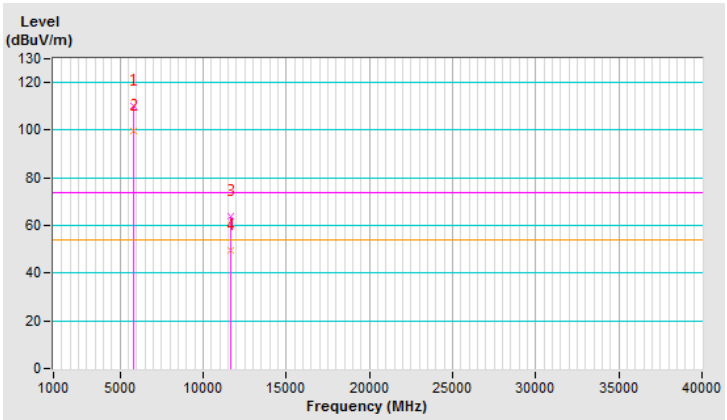


操 作 模 式 ：	發射	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 165：5825 MHz (OOBE)	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 08 月 26 日	測 試 者 ：	張家誠

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5602.40	62.2 PK	68.2	-6.0	1.02 H	344	56.6	5.6
2	#5929.60	62.1 PK	68.2	-6.1	1.02 H	344	55.7	6.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

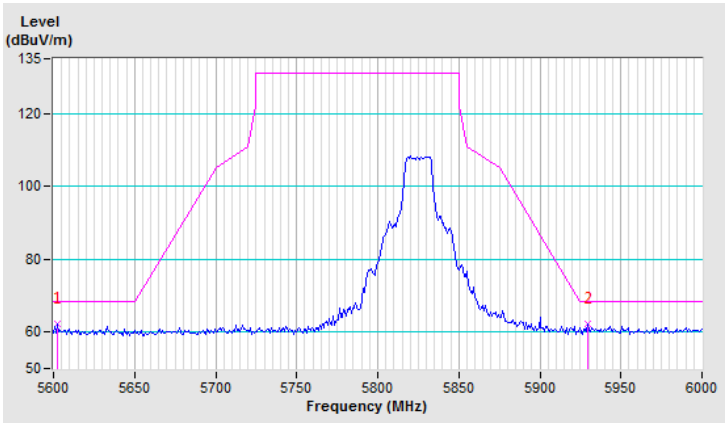


操 作 模 式 ：	發射	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 165：5825 MHz (OOBE)	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 08 月 14 日	測 試 者 ：	張家誠

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5646.40	62.5 PK	68.2	-5.7	2.57 V	26	56.9	5.6
2	#5945.60	63.6 PK	68.2	-4.6	2.57 V	26	57.2	6.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

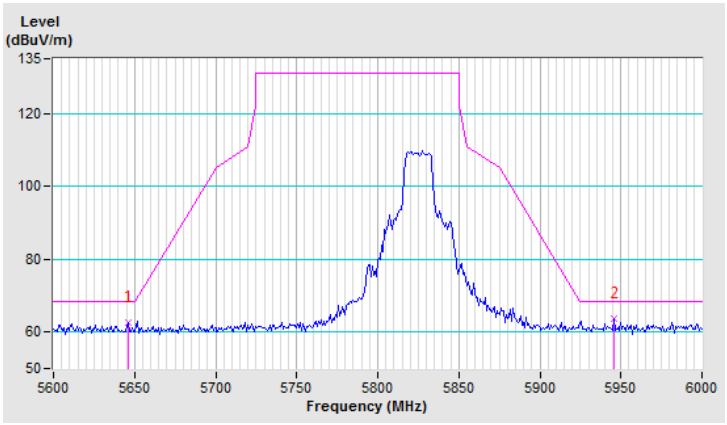


802.11ax (HE20)

操作模式：	發射	調變技術：	OFDMA
基本波頻率：	CH 36：5180 MHz	測試儀器：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量測場地溫度：	25℃	量測場地濕度：	70%RH
測試日期：	108 年 08 月 14 日	測試者：	張家誠

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	69.3 PK	74.0	-4.7	2.69 H	99	63.9	5.4
2	5150.00	51.7 AV	54.0	-2.3	2.69 H	99	46.3	5.4
3	*5180.00	109.6 PK			2.03 H	66	72.9	36.7
4	*5180.00	97.0 AV			2.03 H	66	60.3	36.7
5	#10360.00	62.5 PK	68.2	-5.7	1.66 H	196	47.2	15.3
6	15540.00	-	-	-	-	-	-	-
7	20720.00	-	-	-	-	-	-	-
8	#25900.00	-	-	-	-	-	-	-
9	#31080.00	-	-	-	-	-	-	-
10	#36260.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

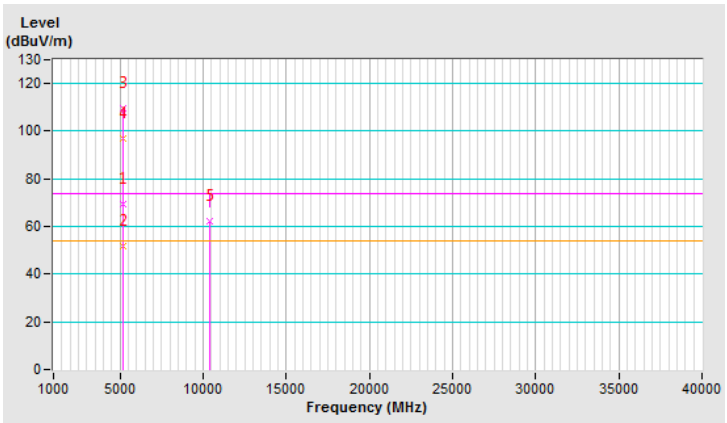


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 36：5180 MHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 08 月 14 日	測 試 者 ：	張家誠

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	70.3 PK	74.0	-3.7	3.15 V	10	64.9	5.4
2	5150.00	52.8 AV	54.0	-1.2	3.15 V	10	47.4	5.4
3	*5180.00	110.6 PK			3.05 V	8	73.9	36.7
4	*5180.00	98.0 AV			3.05 V	8	61.3	36.7
5	#10360.00	63.0 PK	68.2	-5.2	1.00 V	233	47.7	15.3
6	15540.00	-	-	-	-	-	-	-
7	20720.00	-	-	-	-	-	-	-
8	#25900.00	-	-	-	-	-	-	-
9	#31080.00	-	-	-	-	-	-	-
10	#36260.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

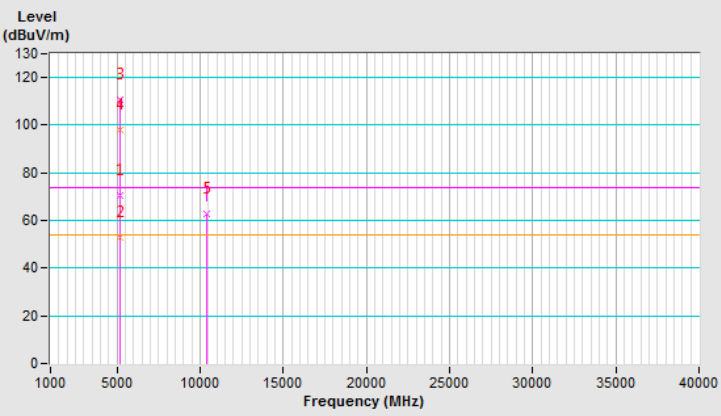


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 40：5200 MHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 08 月 14 日	測 試 者 ：	張家誠

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	67.4 PK	74.0	-6.6	2.15 H	16	62.0	5.4
2	5150.00	51.7 AV	54.0	-2.3	2.15 H	16	46.3	5.4
3	*5200.00	114.8 PK			2.00 H	123	78.1	36.7
4	*5200.00	104.0 AV			2.00 H	123	67.3	36.7
5	#10400.00	63.0 PK	68.2	-5.2	3.29 H	316	47.4	15.6
6	15600.00	-	-	-	-	-	-	-
7	20800.00	-	-	-	-	-	-	-
8	#26000.00	-	-	-	-	-	-	-
9	31200.00	-	-	-	-	-	-	-
10	#36400.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

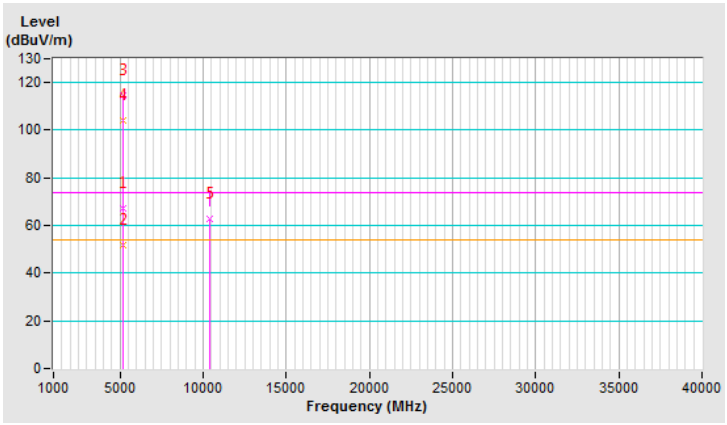


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 40：5200 MHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 08 月 14 日	測 試 者 ：	張家誠

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	68.4 PK	74.0	-5.6	2.99 V	13	63.0	5.4
2	5150.00	52.7 AV	54.0	-1.3	2.99 V	13	47.3	5.4
3	*5200.00	115.8 PK			3.00 V	5	79.1	36.7
4	*5200.00	105.0 AV			3.00 V	5	68.3	36.7
5	#10400.00	63.3 PK	68.2	-4.9	3.15 V	322	47.7	15.6
6	15600.00	-	-	-	-	-	-	-
7	20800.00	-	-	-	-	-	-	-
8	#26000.00	-	-	-	-	-	-	-
9	31200.00	-	-	-	-	-	-	-
10	#36400.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

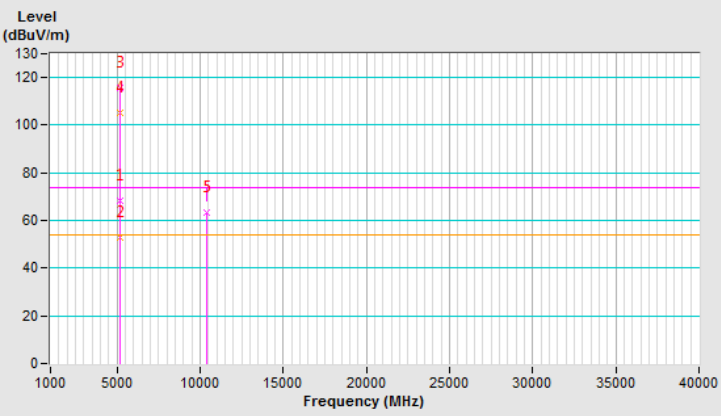


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 48：5240 MHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 08 月 14 日	測 試 者 ：	張家誠

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5240.00	112.2 PK			2.00 H	106	75.8	36.4
2	*5240.00	100.7 AV			2.00 H	106	64.3	36.4
3	5350.00	60.8 PK	74.0	-13.2	2.88 H	10	55.6	5.2
4	5350.00	47.8 AV	54.0	-6.2	2.88 H	10	42.6	5.2
5	#10480.00	63.4 PK	68.2	-4.8	2.99 H	263	47.9	15.5
6	15720.00	-	-	-	-	-	-	-
7	20960.00	-	-	-	-	-	-	-
8	#26200.00	-	-	-	-	-	-	-
9	31440.00	-	-	-	-	-	-	-
10	#36680.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

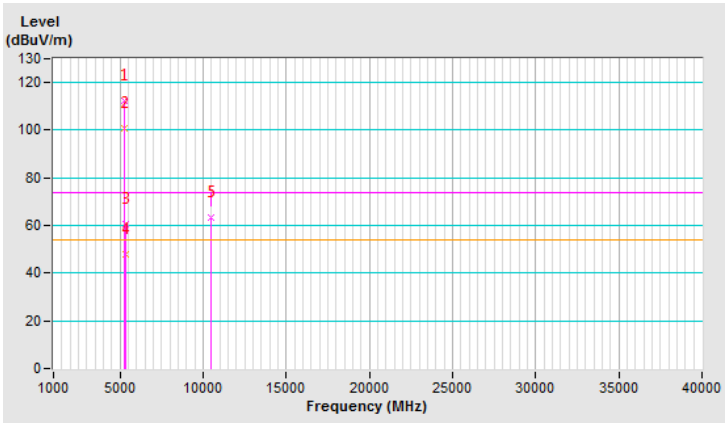


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 48：5240 MHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 08 月 14 日	測 試 者 ：	張家誠

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5240.00	113.2 PK			3.05 V	12	76.8	36.4
2	*5240.00	101.7 AV			3.05 V	12	65.3	36.4
3	5350.00	61.1 PK	74.0	-12.9	2.89 V	2	55.9	5.2
4	5350.00	48.0 AV	54.0	-6.0	2.89 V	2	42.8	5.2
5	#10480.00	63.6 PK	68.2	-4.6	3.00 V	333	48.1	15.5
6	15720.00	-	-	-	-	-	-	-
7	20960.00	-	-	-	-	-	-	-
8	#26200.00	-	-	-	-	-	-	-
9	31440.00	-	-	-	-	-	-	-
10	#36680.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

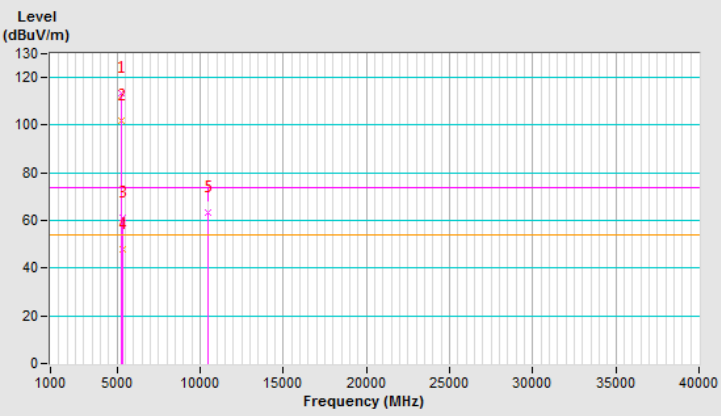


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 149：5745 MHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 08 月 26 日	測 試 者 ：	張家誠

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5745.00	108.9 PK			1.03 H	343	71.5	37.4
2	*5745.00	97.7 AV			1.03 H	343	60.3	37.4
3	11490.00	64.3 PK	74.0	-9.7	2.63 H	323	46.8	17.5
4	11490.00	50.3 AV	54.0	-3.7	2.63 H	323	32.8	17.5
5	#17235.00	-	-	-	-	-	-	-
6	22980.00	-	-	-	-	-	-	-
7	#28725.00	-	-	-	-	-	-	-
8	#34470.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

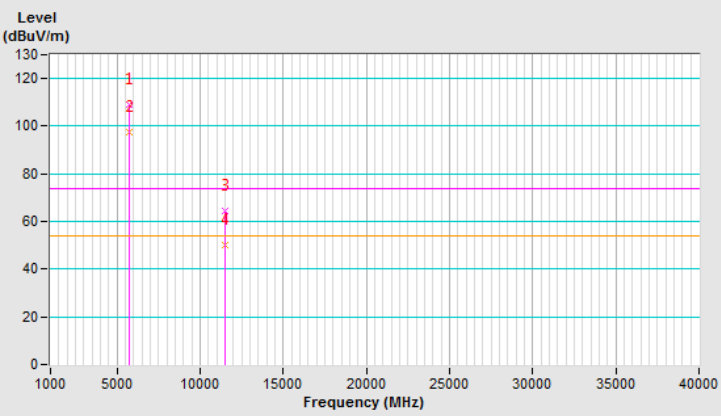


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 149：5745 MHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 08 月 14 日	測 試 者 ：	張家誠

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5745.00	110.0 PK			2.59 V	30	72.6	37.4
2	*5745.00	98.8 AV			2.59 V	30	61.4	37.4
3	11490.00	64.4 PK	74.0	-9.6	2.69 V	255	46.9	17.5
4	11490.00	50.6 AV	54.0	-3.4	2.69 V	255	33.1	17.5
5	#17235.00	-	-	-	-	-	-	-
6	22980.00	-	-	-	-	-	-	-
7	#28725.00	-	-	-	-	-	-	-
8	#34470.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

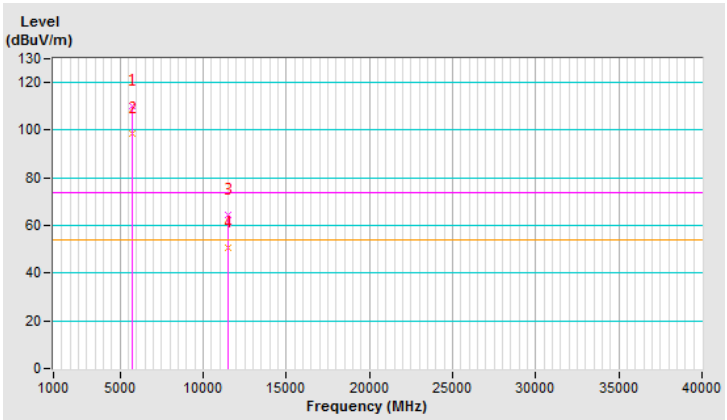


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 149：5745 MHz (OOBE)	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 08 月 26 日	測 試 者 ：	張家誠

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5600.00	61.8 PK	68.2	-6.4	1.03 H	343	56.2	5.6
2	#5960.80	61.9 PK	68.2	-6.3	1.03 H	343	55.6	6.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

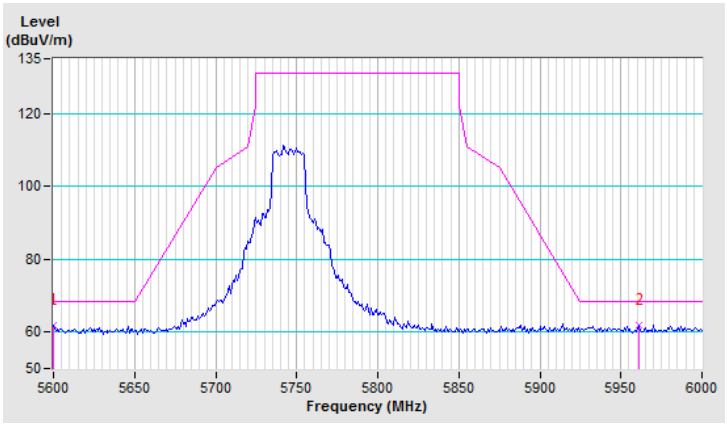


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 149：5745 MHz (OOBE)	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 08 月 14 日	測 試 者 ：	張家誠

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5646.40	62.3 PK	68.2	-5.9	2.59 V	30	56.7	5.6
2	#5973.60	62.8 PK	68.2	-5.4	2.59 V	30	56.5	6.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

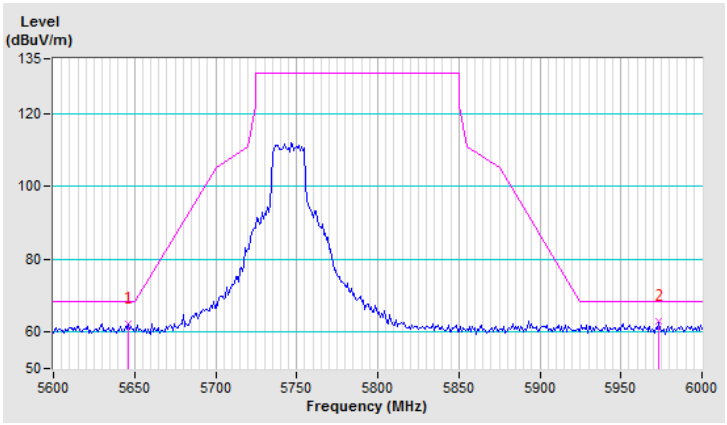


操作模式：	發射	調變技術：	OFDMA
基本波頻率：	CH 157：5785 MHz	測試儀器：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量測場地溫度：	25℃	量測場地濕度：	70%RH
測試日期：	108 年 08 月 26 日	測試者：	張家誠

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5785.00	110.1 PK			1.00 H	345	72.8	37.3
2	*5785.00	98.9 AV			1.00 H	345	61.6	37.3
3	11570.00	64.1 PK	74.0	-9.9	1.05 H	166	46.6	17.5
4	11570.00	50.0 AV	54.0	-4.0	1.05 H	166	32.5	17.5
5	#17355.00	-	-	-	-	-	-	-
6	#23140.00	-	-	-	-	-	-	-
7	#28925.00	-	-	-	-	-	-	-
8	#34710.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

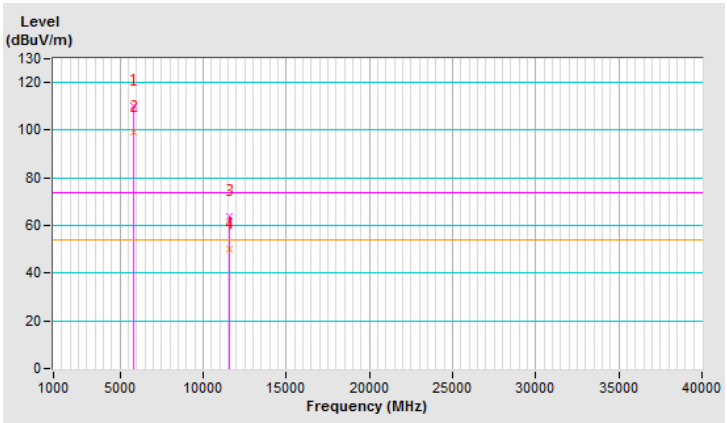


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 157：5785 MHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 08 月 14 日	測 試 者 ：	張家誠

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5785.00	111.3 PK			2.57 V	25	74.0	37.3
2	*5785.00	100.1 AV			2.57 V	25	62.8	37.3
3	11570.00	64.5 PK	74.0	-9.5	2.96 V	239	47.0	17.5
4	11570.00	50.5 AV	54.0	-3.5	2.96 V	239	33.0	17.5
5	#17355.00	-	-	-	-	-	-	-
6	#23140.00	-	-	-	-	-	-	-
7	#28925.00	-	-	-	-	-	-	-
8	#34710.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

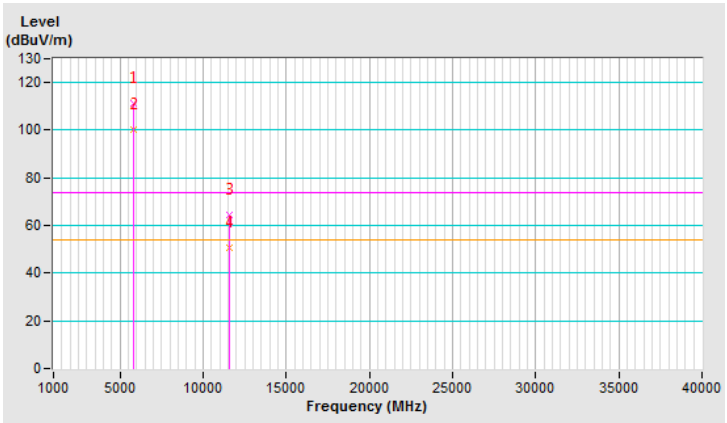


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 157：5785 MHz (OOBE)	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 08 月 27 日	測 試 者 ：	張家誠

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5609.60	61.5 PK	68.2	-6.7	1.00 H	345	55.9	5.6
2	#5968.80	62.3 PK	68.2	-5.9	1.00 H	345	56.0	6.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

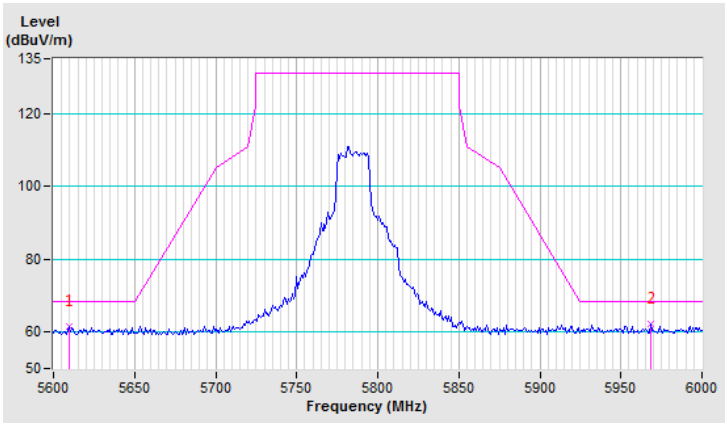


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 157：5785 MHz (OOBE)	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 08 月 14 日	測 試 者 ：	張家誠

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5619.20	63.2 PK	68.2	-5.0	2.57 V	25	57.6	5.6
2	#5955.20	62.7 PK	68.2	-5.5	2.57 V	25	56.3	6.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

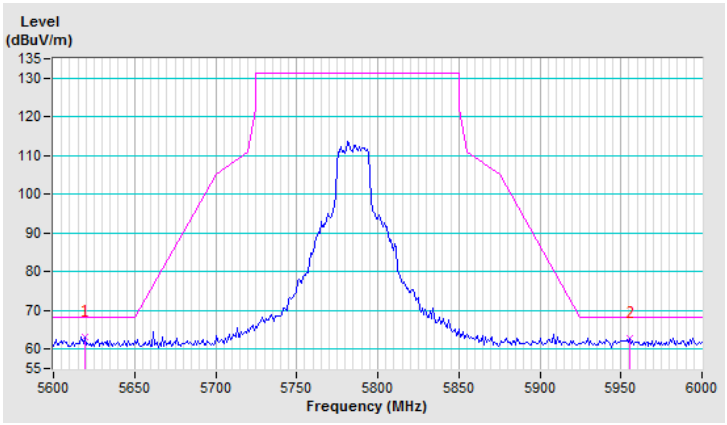


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 165：5825 MHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 08 月 27 日	測 試 者 ：	張家誠

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5825.00	107.8 PK			1.01 H	340	70.4	37.4
2	*5825.00	97.6 AV			1.01 H	340	60.2	37.4
3	11650.00	62.5 PK	74.0	-11.5	2.00 H	215	45.5	17.0
4	11650.00	49.2 AV	54.0	-4.8	2.00 H	215	32.2	17.0
5	#17475.00	-	-	-	-	-	-	-
6	#23300.00	-	-	-	-	-	-	-
7	#29125.00	-	-	-	-	-	-	-
8	#34950.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

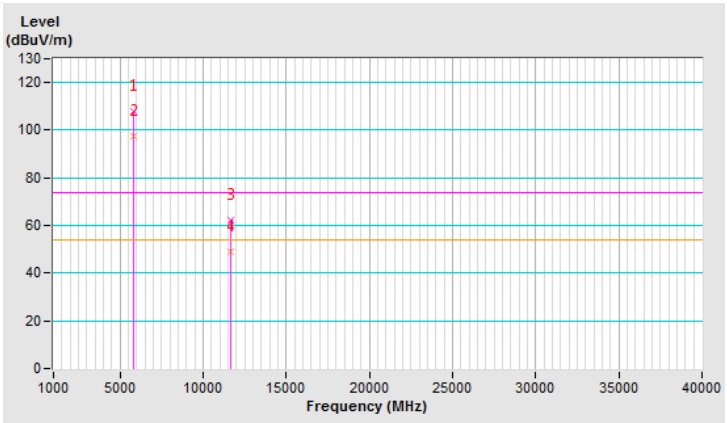


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 165：5825 MHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 08 月 14 日	測 試 者 ：	張家誠

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5825.00	109.0 PK			2.55 V	20	71.6	37.4
2	*5825.00	98.8 AV			2.55 V	20	61.4	37.4
3	11650.00	62.7 PK	74.0	-11.3	2.00 V	235	45.7	17.0
4	11650.00	49.3 AV	54.0	-4.7	2.00 V	235	32.3	17.0
5	#17475.00	-	-	-	-	-	-	-
6	#23300.00	-	-	-	-	-	-	-
7	#29125.00	-	-	-	-	-	-	-
8	#34950.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

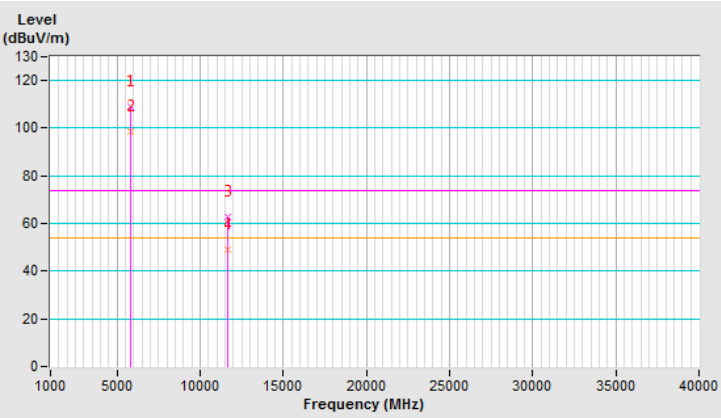


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 165：5825 MHz (OOBE)	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 08 月 27 日	測 試 者 ：	張家誠

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5619.20	61.5 PK	68.2	-6.7	1.01 H	340	55.9	5.6
2	#5929.60	62.3 PK	68.2	-5.9	1.01 H	340	55.9	6.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

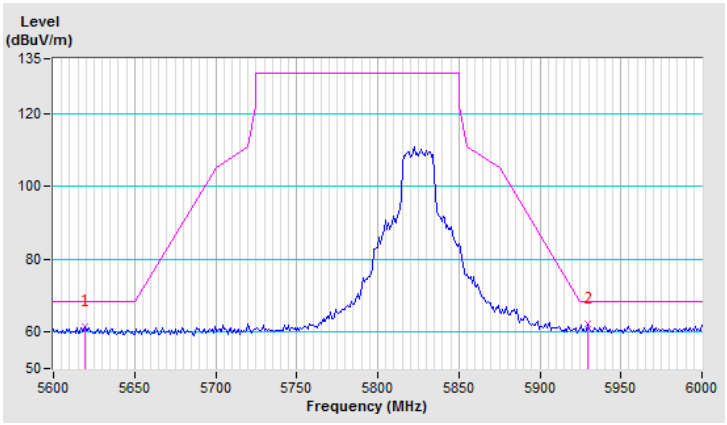


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 165：5825 MHz (OOBE)	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 08 月 14 日	測 試 者 ：	張家誠

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5628.80	62.1 PK	68.2	-6.1	2.55 V	20	56.5	5.6
2	#5984.80	62.7 PK	68.2	-5.5	2.55 V	20	56.3	6.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

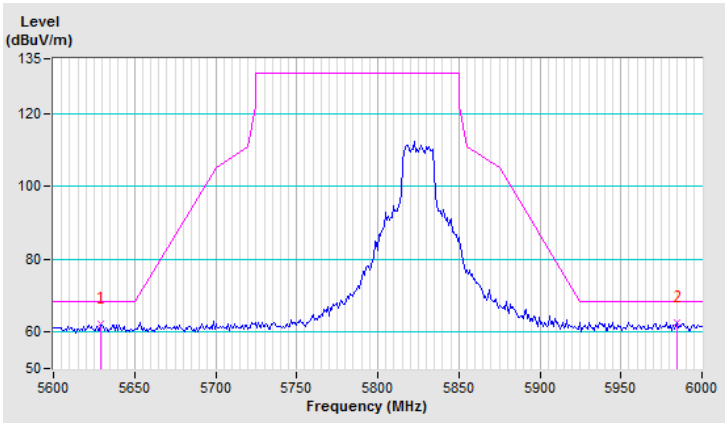


802.11ax (HE40)

操作模式：	發射	調變技術：	OFDMA
基本波頻率：	CH 38：5190 MHz	測試儀器：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=3kHz
量測場地溫度：	25℃	量測場地濕度：	70%RH
測試日期：	108 年 08 月 14 日	測試者：	張家誠

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	68.7 PK	74.0	-5.3	2.52 H	102	63.3	5.4
2	5150.00	51.8 AV	54.0	-2.2	2.52 H	102	46.4	5.4
3	*5190.00	103.8 PK			2.52 H	100	67.1	36.7
4	*5190.00	91.7 AV			2.52 H	100	55.0	36.7
5	#10380.00	63.4 PK	68.2	-4.8	3.00 H	315	48.0	15.4
6	15570.00	-	-	-	-	-	-	-
7	20760.00	-	-	-	-	-	-	-
8	#25950.00	-	-	-	-	-	-	-
9	#31140.00	-	-	-	-	-	-	-
10	#36330.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

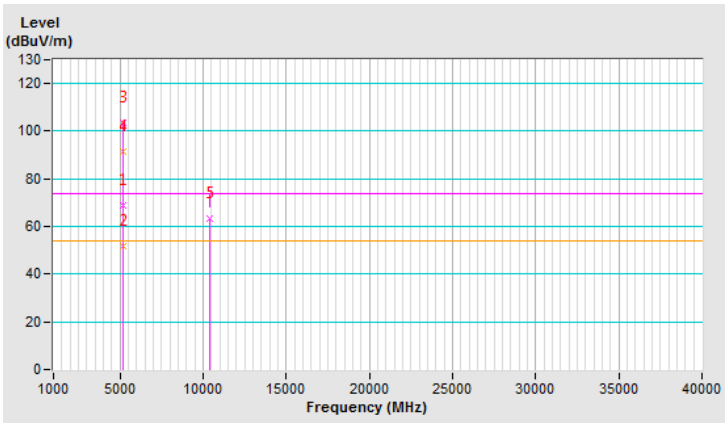


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 38：5190 MHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=3kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 08 月 14 日	測 試 者 ：	張家誠

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	69.7 PK	74.0	-4.3	3.15 V	13	64.3	5.4
2	5150.00	52.8 AV	54.0	-1.2	3.15 V	13	47.4	5.4
3	*5190.00	104.8 PK			3.21 V	1	68.1	36.7
4	*5190.00	92.7 AV			3.21 V	1	56.0	36.7
5	#10380.00	63.2 PK	68.2	-5.0	3.06 V	269	47.8	15.4
6	15570.00	-	-	-	-	-	-	-
7	20760.00	-	-	-	-	-	-	-
8	#25950.00	-	-	-	-	-	-	-
9	#31140.00	-	-	-	-	-	-	-
10	#36330.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

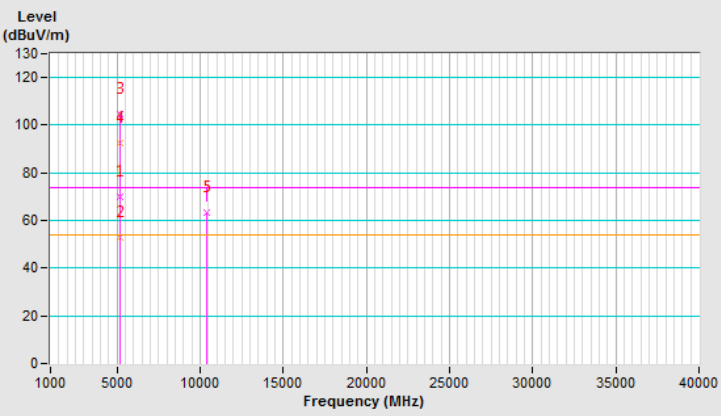


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 46：5230 MHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=3kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 08 月 14 日	測 試 者 ：	張家誠

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	65.0 PK	74.0	-9.0	2.62 H	152	59.6	5.4
2	5150.00	51.3 AV	54.0	-2.7	2.62 H	152	45.9	5.4
3	*5230.00	107.1 PK			2.51 H	106	70.6	36.5
4	*5230.00	65.3 AV			2.51 H	106	28.8	36.5
5	5350.00	60.6 PK	74.0	-13.4	2.66 H	107	55.4	5.2
6	5350.00	48.0 AV	54.0	-6.0	2.66 H	107	42.8	5.2
7	#10460.00	63.5 PK	68.2	-4.7	3.06 H	311	47.9	15.6
8	15690.00	-	-	-	-	-	-	-
9	20920.00	-	-	-	-	-	-	-
10	#26150.00	-	-	-	-	-	-	-
11	31380.00	-	-	-	-	-	-	-
12	#36610.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

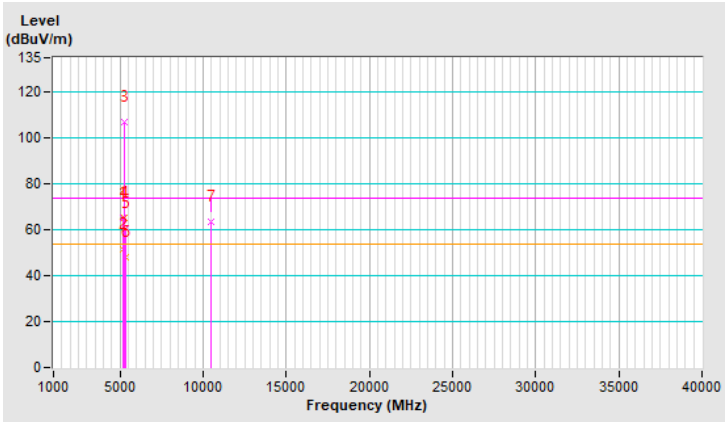


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 46：5230 MHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=3kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 08 月 14 日	測 試 者 ：	張家誠

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	66.0 PK	74.0	-8.0	3.11 V	26	60.6	5.4
2	5150.00	52.3 AV	54.0	-1.7	3.11 V	26	46.9	5.4
3	*5230.00	108.1 PK			3.06 V	3	71.6	36.5
4	*5230.00	96.3 AV			3.06 V	3	59.8	36.5
5	5350.00	60.9 PK	74.0	-13.1	2.98 V	1	55.7	5.2
6	5350.00	48.2 AV	54.0	-5.8	2.98 V	1	43.0	5.2
7	#10460.00	63.6 PK	68.2	-4.6	3.05 V	333	48.0	15.6
8	15690.00	-	-	-	-	-	-	-
9	20920.00	-	-	-	-	-	-	-
10	#26150.00	-	-	-	-	-	-	-
11	31380.00	-	-	-	-	-	-	-
12	#36610.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

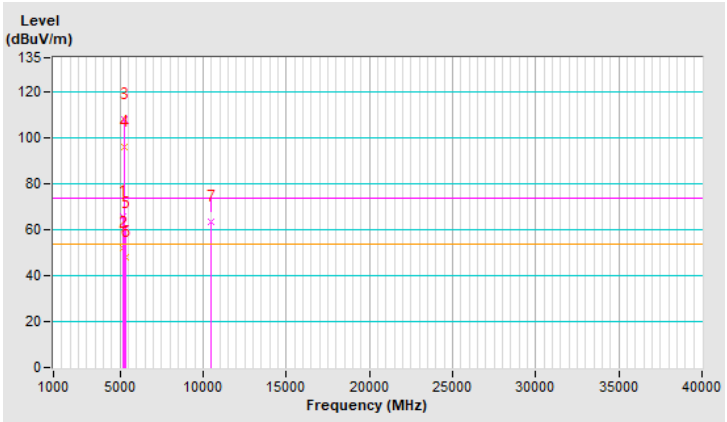


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 151：5755 MHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=3kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 08 月 27 日	測 試 者 ：	張家誠

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5755.00	107.3 PK			1.06 H	349	70.0	37.3
2	*5755.00	96.6 AV			1.06 H	349	59.3	37.3
3	11510.00	64.1 PK	74.0	-9.9	2.62 H	222	46.8	17.3
4	11510.00	49.8 AV	54.0	-4.2	2.62 H	222	32.5	17.3
5	#17265.00	-	-	-	-	-	-	-
6	23020.00	-	-	-	-	-	-	-
7	#28775.00	-	-	-	-	-	-	-
8	#34530.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

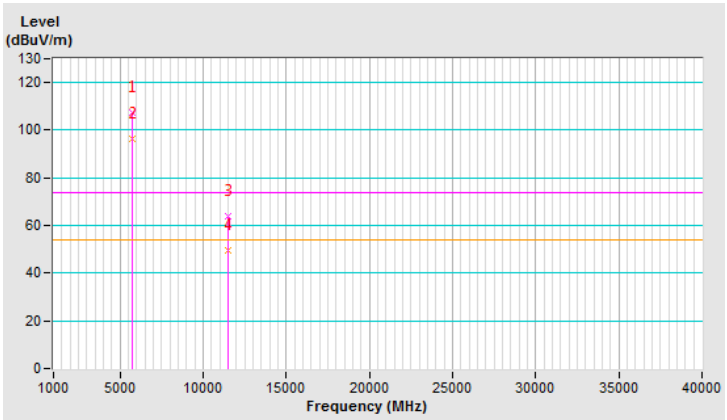


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 151：5755 MHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=3kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 08 月 15 日	測 試 者 ：	張家誠

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5755.00	108.6 PK			2.60 V	25	71.3	37.3
2	*5755.00	97.7 AV			2.60 V	25	60.4	37.3
3	11510.00	64.3 PK	74.0	-9.7	2.22 V	311	47.0	17.3
4	11510.00	50.0 AV	54.0	-4.0	2.22 V	311	32.7	17.3
5	#17265.00	-	-	-	-	-	-	-
6	23020.00	-	-	-	-	-	-	-
7	#28775.00	-	-	-	-	-	-	-
8	#34530.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

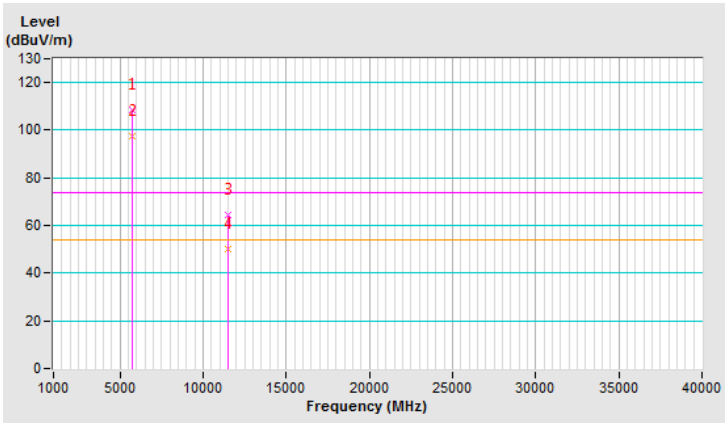


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 151：5755 MHz (OOBE)	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=3kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 08 月 27 日	測 試 者 ：	張家誠

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5644.80	63.8 PK	68.2	-4.4	1.06 H	349	58.2	5.6
2	#5927.20	61.6 PK	68.2	-6.6	1.06 H	349	55.2	6.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

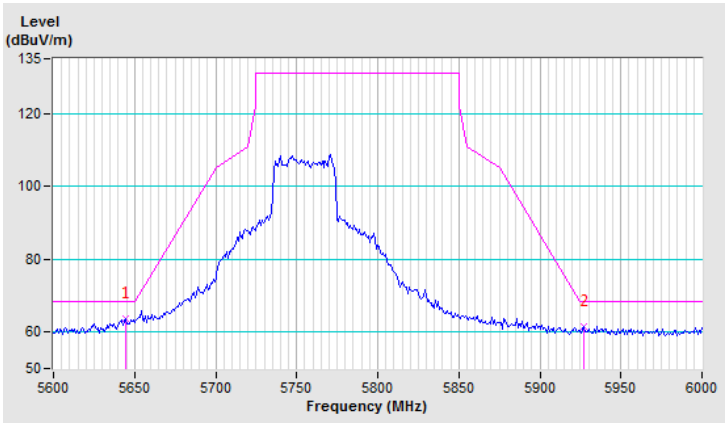


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 151：5755 MHz (OOBE)	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=3kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 08 月 14 日	測 試 者 ：	張家誠

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5644.80	64.5 PK	68.2	-3.7	2.60 V	25	58.9	5.6
2	#5988.00	63.4 PK	68.2	-4.8	2.60 V	25	57.0	6.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

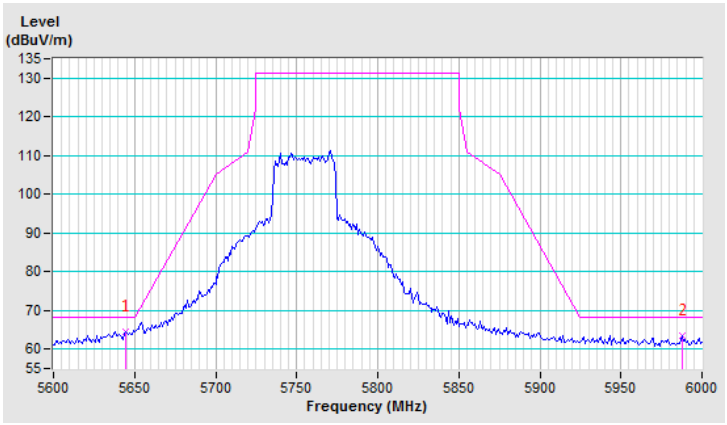


操作模式：	發射	調變技術：	OFDMA
基本波頻率：	CH 159：5795 MHz	測試儀器：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=3kHz
量測場地溫度：	25℃	量測場地濕度：	70%RH
測試日期：	108 年 08 月 27 日	測試者：	張家誠

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5795.00	106.6 PK			1.00 H	341	69.3	37.3
2	*5795.00	96.5 AV			1.00 H	341	59.2	37.3
3	11590.00	63.1 PK	74.0	-10.9	2.55 H	111	45.6	17.5
4	11590.00	49.5 AV	54.0	-4.5	2.55 H	111	32.0	17.5
5	#17385.00	-	-	-	-	-	-	-
6	#23180.00	-	-	-	-	-	-	-
7	#28975.00	-	-	-	-	-	-	-
8	#34770.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

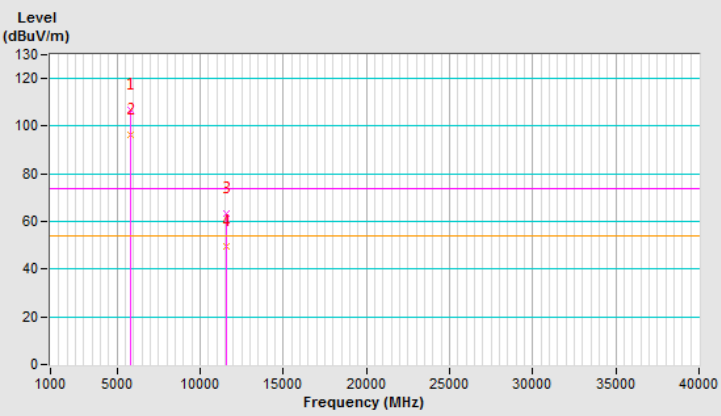


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 159：5795 MHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=3kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 08 月 15 日	測 試 者 ：	張家誠

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5795.00	107.8 PK			2.57 V	25	70.5	37.3
2	*5795.00	97.6 AV			2.57 V	25	60.3	37.3
3	11590.00	63.5 PK	74.0	-10.5	2.88 V	205	46.0	17.5
4	11590.00	49.7 AV	54.0	-4.3	2.88 V	205	32.2	17.5
5	#17385.00	-	-	-	-	-	-	-
6	#23180.00	-	-	-	-	-	-	-
7	#28975.00	-	-	-	-	-	-	-
8	#34770.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

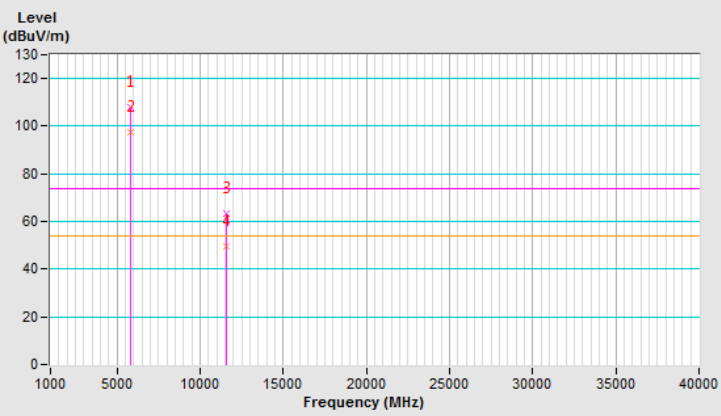


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 159：5795 MHz (OOBE)	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=3kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 08 月 27 日	測 試 者 ：	張家誠

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5646.40	62.1 PK	68.2	-6.1	1.00 H	341	56.5	5.6
2	#5928.00	63.7 PK	68.2	-4.5	1.00 H	341	57.3	6.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

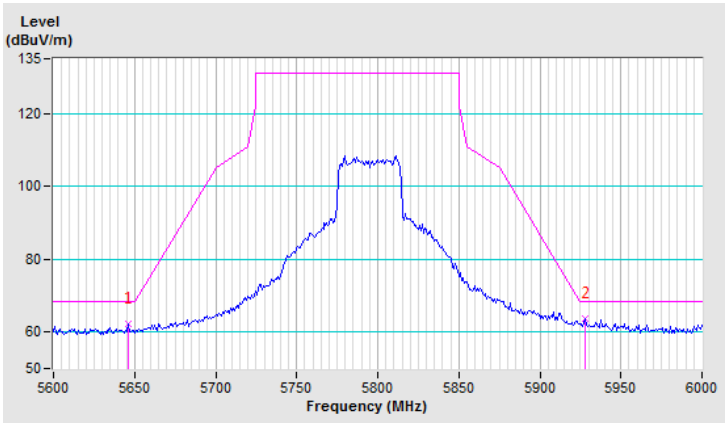


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 159：5795 MHz (OOBE)	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=3kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 08 月 15 日	測 試 者 ：	張家誠

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5651.20	64.1 PK	69.1	-5.0	2.57 V	25	58.5	5.6
2	#5928.00	65.7 PK	68.2	-2.5	2.57 V	25	59.3	6.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

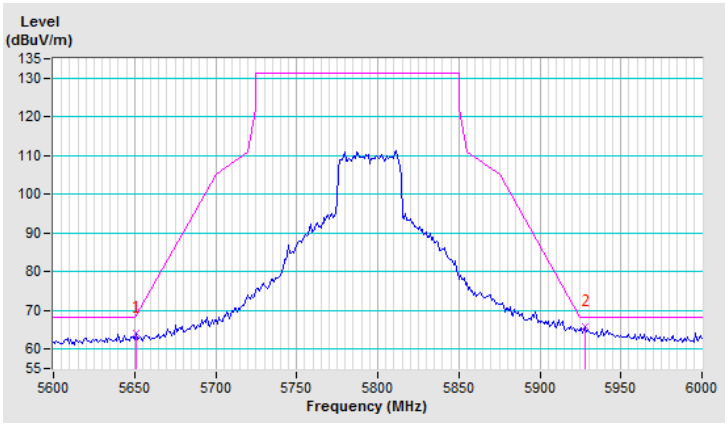


802.11ax (HE80)

操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 42：5210 MHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=3kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 08 月 14 日	測 試 者 ：	張家誠

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	67.4 PK	74.0	-6.6	2.02 H	30	62.0	5.4
2	5150.00	51.8 AV	54.0	-2.2	2.02 H	30	46.4	5.4
3	*5210.00	101.5 PK			2.52 H	102	64.9	36.6
4	*5210.00	89.7 AV			2.52 H	102	53.1	36.6
5	5350.00	60.6 PK	74.0	-13.4	3.10 H	15	55.4	5.2
6	5350.00	47.6 AV	54.0	-6.4	3.10 H	15	42.4	5.2
7	#10420.00	62.8 PK	68.2	-5.4	2.66 H	263	47.3	15.5
8	15630.00	-	-	-	-	-	-	-
9	20840.00	-	-	-	-	-	-	-
10	#26050.00	-	-	-	-	-	-	-
11	31260.00	-	-	-	-	-	-	-
12	36470.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

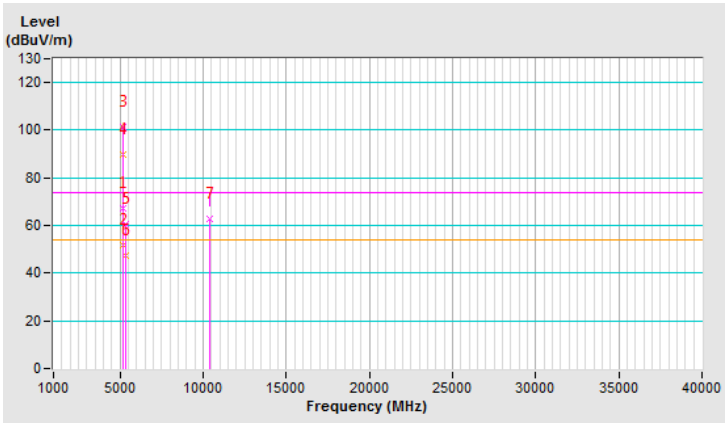


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 42：5210 MHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=3kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 08 月 14 日	測 試 者 ：	張家誠

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	68.4 PK	74.0	-5.6	3.26 V	33	63.0	5.4
2	5150.00	52.8 AV	54.0	-1.2	3.26 V	33	47.4	5.4
3	*5210.00	102.5 PK			3.15 V	12	65.9	36.6
4	*5210.00	90.7 AV			3.15 V	12	54.1	36.6
5	5350.00	60.8 PK	74.0	-13.2	2.96 V	23	55.6	5.2
6	5350.00	47.8 AV	54.0	-6.2	2.96 V	23	42.6	5.2
7	#10420.00	63.2 PK	68.2	-5.0	2.02 V	211	47.7	15.5
8	15630.00	-	-	-	-	-	-	-
9	20840.00	-	-	-	-	-	-	-
10	#26050.00	-	-	-	-	-	-	-
11	31260.00	-	-	-	-	-	-	-
12	36470.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

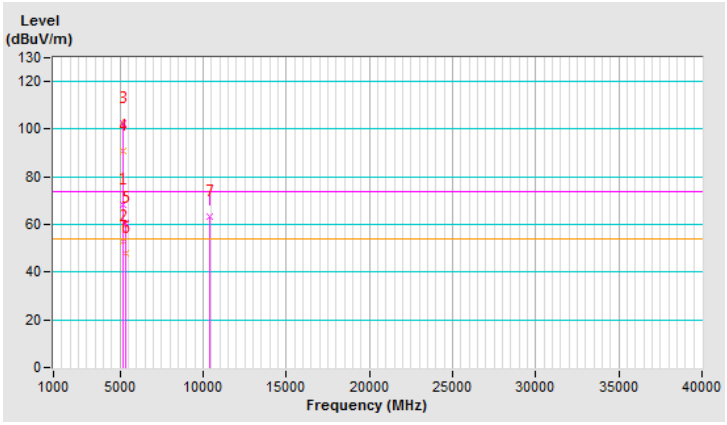


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 155：5775 MHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=3kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 08 月 27 日	測 試 者 ：	張家誠

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5775.00	103.8 PK			1.02 H	346	66.5	37.3
2	*5775.00	91.6 AV			1.02 H	346	54.3	37.3
3	11550.00	64.0 PK	74.0	-10.0	2.60 H	15	46.5	17.5
4	11550.00	50.3 AV	54.0	-3.7	2.60 H	15	32.8	17.5
5	#17325.00	-	-	-	-	-	-	-
6	23100.00	-	-	-	-	-	-	-
7	#28875.00	-	-	-	-	-	-	-
8	#34650.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

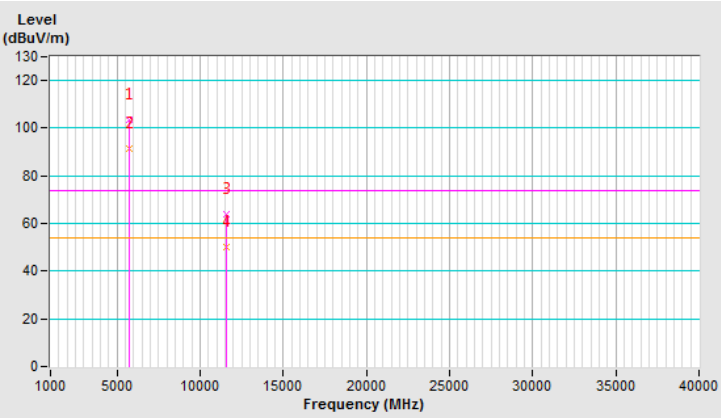


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 155：5775 MHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=3kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 08 月 15 日	測 試 者 ：	張家誠

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5775.00	104.9 PK			2.56 V	21	67.6	37.3
2	*5775.00	92.7 AV			2.56 V	21	55.4	37.3
3	11550.00	64.3 PK	74.0	-9.7	4.00 V	263	46.8	17.5
4	11550.00	50.6 AV	54.0	-3.4	4.00 V	263	33.1	17.5
5	#17325.00	-	-	-	-	-	-	-
6	23100.00	-	-	-	-	-	-	-
7	#28875.00	-	-	-	-	-	-	-
8	#34650.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

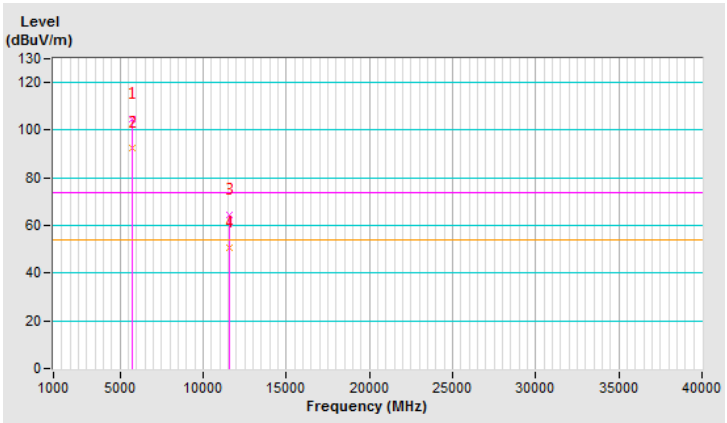


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 155：5775 MHz (OOBE)	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=3kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 08 月 27 日	測 試 者 ：	張家誠

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5650.40	66.1 PK	68.5	-2.4	1.02 H	346	60.5	5.6
2	#5926.40	64.7 PK	68.2	-3.5	1.02 H	346	58.3	6.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

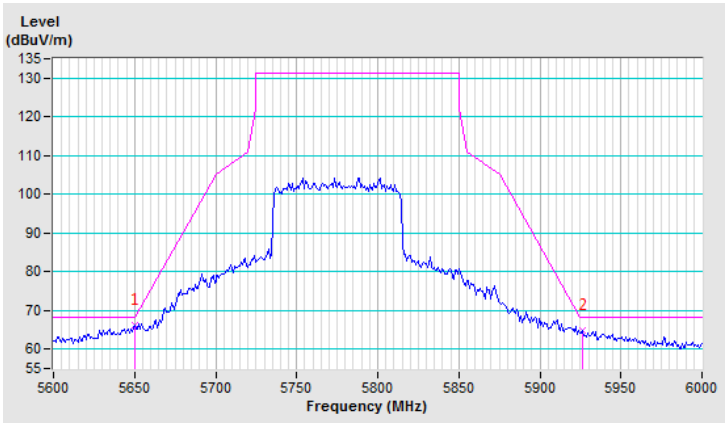


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 155：5775 MHz (OOBE)	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=3kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 08 月 15 日	測 試 者 ：	張家誠

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5636.80	66.9 PK	68.2	-1.3	2.56 V	21	61.3	5.6
2	#5924.80	66.3 PK	68.3	-2.0	2.56 V	21	59.9	6.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

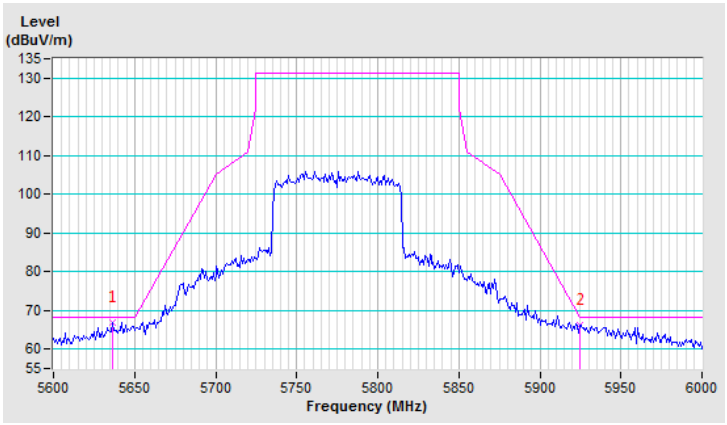

2TX


802.11a

操 作 模 式 ：	發射	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 36：5180 MHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 07 月 10 日	測 試 者 ：	李哲銘

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	67.8 PK	74.0	-6.2	1.05 H	340	55.2	12.6
2	5150.00	51.7 AV	54.0	-2.3	1.05 H	340	39.1	12.6
3	*5180.00	110.9 PK			1.00 H	349	69.4	41.5
4	*5180.00	101.2 AV			1.00 H	349	59.7	41.5
5	#10360.00	62.5 PK	68.2	-5.7	1.05 H	224	40.0	22.5
6	15540.00	-	-	-	-	-	-	-
7	20720.00	-	-	-	-	-	-	-
8	#25900.00	-	-	-	-	-	-	-
9	#31080.00	-	-	-	-	-	-	-
10	#36260.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

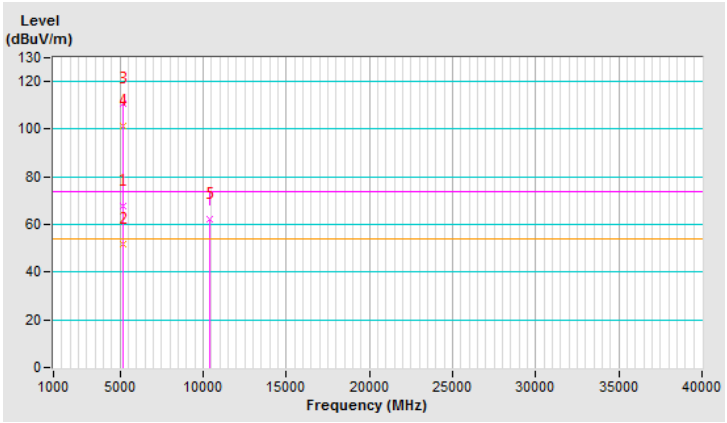


操 作 模 式 ：	發射	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 36：5180 MHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 07 月 10 日	測 試 者 ：	李哲銘

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	68.7 PK	74.0	-5.3	1.04 V	25	56.1	12.6
2	5150.00	52.6 AV	54.0	-1.4	1.04 V	25	40.0	12.6
3	*5180.00	111.8 PK			1.04 V	19	70.3	41.5
4	*5180.00	101.9 AV			1.04 V	19	60.4	41.5
5	#10360.00	63.0 PK	68.2	-5.2	2.64 V	118	40.5	22.5
6	15540.00	-	-	-	-	-	-	-
7	20720.00	-	-	-	-	-	-	-
8	#25900.00	-	-	-	-	-	-	-
9	#31080.00	-	-	-	-	-	-	-
10	#36260.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

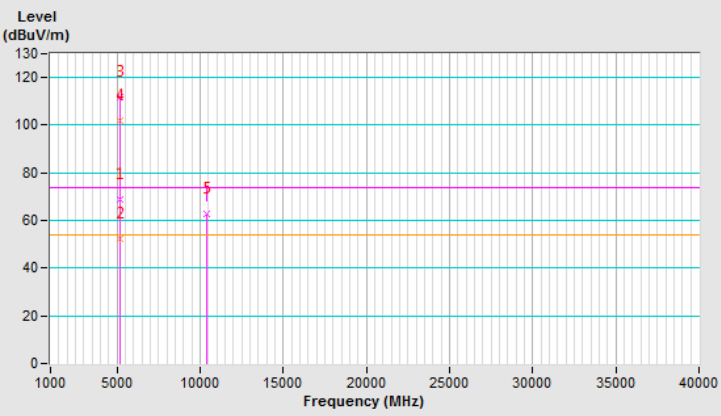


操 作 模 式 ：	發射	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 40：5200 MHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 07 月 10 日	測 試 者 ：	李哲銘

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	68.0 PK	74.0	-6.0	1.06 H	330	55.4	12.6
2	5150.00	51.8 AV	54.0	-2.2	1.06 H	330	39.2	12.6
3	*5200.00	113.9 PK			1.02 H	348	72.4	41.5
4	*5200.00	104.0 AV			1.02 H	348	62.5	41.5
5	#10400.00	62.4 PK	68.2	-5.8	1.15 H	230	39.5	22.9
6	15600.00	-	-	-	-	-	-	-
7	20800.00	-	-	-	-	-	-	-
8	#26000.00	-	-	-	-	-	-	-
9	31200.00	-	-	-	-	-	-	-
10	#36400.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

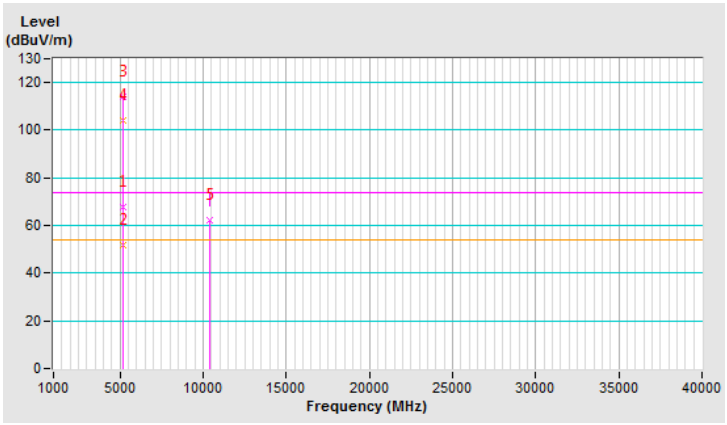


操 作 模 式 ：	發射	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 40：5200 MHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 07 月 10 日	測 試 者 ：	李哲銘

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	68.8 PK	74.0	-5.2	1.04 V	21	56.2	12.6
2	5150.00	52.6 AV	54.0	-1.4	1.04 V	21	40.0	12.6
3	*5200.00	114.8 PK			1.05 V	27	73.3	41.5
4	*5200.00	104.9 AV			1.05 V	27	63.4	41.5
5	#10400.00	63.5 PK	68.2	-4.7	1.69 V	241	40.6	22.9
6	15600.00	-	-	-	-	-	-	-
7	20800.00	-	-	-	-	-	-	-
8	#26000.00	-	-	-	-	-	-	-
9	31200.00	-	-	-	-	-	-	-
10	#36400.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

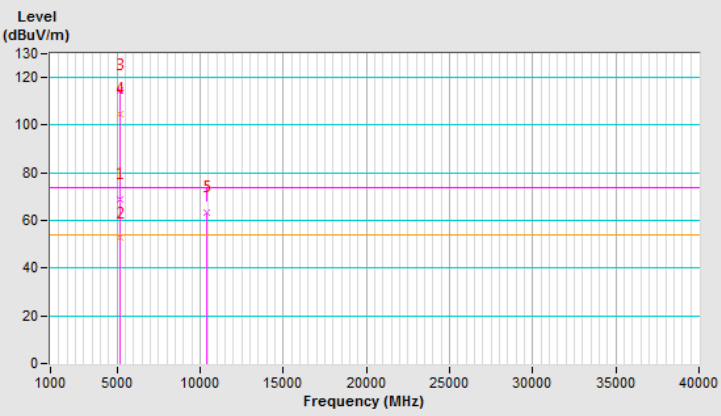


操 作 模 式 ：	發射	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 48：5240 MHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 07 月 10 日	測 試 者 ：	李哲銘

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5240.00	114.6 PK			1.01 H	341	73.4	41.2
2	*5240.00	103.8 AV			1.01 H	341	62.6	41.2
3	5350.00	60.6 PK	74.0	-13.4	1.10 H	342	48.2	12.4
4	5350.00	47.5 AV	54.0	-6.5	1.10 H	342	35.1	12.4
5	#10480.00	62.5 PK	68.2	-5.7	1.50 H	241	39.7	22.8
6	15720.00	-	-	-	-	-	-	-
7	20960.00	-	-	-	-	-	-	-
8	#26200.00	-	-	-	-	-	-	-
9	31440.00	-	-	-	-	-	-	-
10	#36680.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

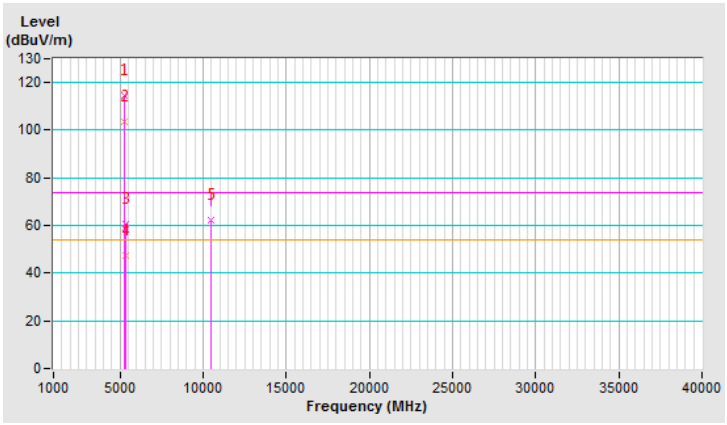


操 作 模 式 ：	發射	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 48：5240 MHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 07 月 10 日	測 試 者 ：	李哲銘

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5240.00	115.5 PK			1.07 V	30	74.3	41.2
2	*5240.00	105.5 AV			1.07 V	30	64.3	41.2
3	5350.00	61.3 PK	74.0	-12.7	1.06 V	29	48.9	12.4
4	5350.00	48.2 AV	54.0	-5.8	1.06 V	29	35.8	12.4
5	#10480.00	63.6 PK	68.2	-4.6	1.65 V	224	40.8	22.8
6	15720.00	-	-	-	-	-	-	-
7	20960.00	-	-	-	-	-	-	-
8	#26200.00	-	-	-	-	-	-	-
9	31440.00	-	-	-	-	-	-	-
10	#36680.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

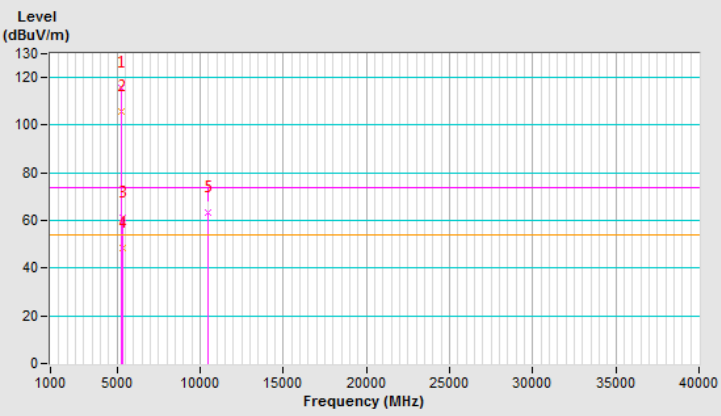


操 作 模 式 ：	發射	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 149：5745 MHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 07 月 08 日	測 試 者 ：	李哲銘

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5745.00	114.1 PK			1.00 H	45	71.6	42.5
2	*5745.00	103.5 AV			1.00 H	45	61.0	42.5
3	11490.00	64.1 PK	74.0	-9.9	2.41 H	156	40.0	24.1
4	11490.00	50.2 AV	54.0	-3.8	2.41 H	156	26.1	24.1
5	#17235.00	-	-	-	-	-	-	-
6	22980.00	-	-	-	-	-	-	-
7	#28725.00	-	-	-	-	-	-	-
8	#34470.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

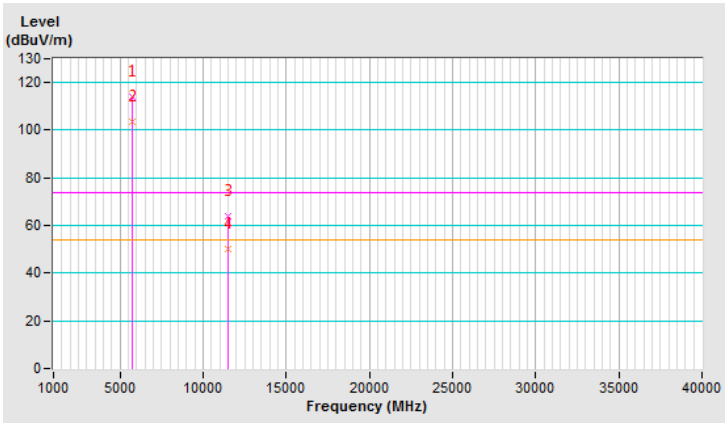


操 作 模 式 ：	發射	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 149：5745 MHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 07 月 08 日	測 試 者 ：	李哲銘

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5745.00	114.4 PK			1.09 V	35	71.9	42.5
2	*5745.00	104.1 AV			1.09 V	35	61.6	42.5
3	11490.00	64.4 PK	74.0	-9.6	2.28 V	196	40.3	24.1
4	11490.00	50.6 AV	54.0	-3.4	2.28 V	196	26.5	24.1
5	#17235.00	-	-	-	-	-	-	-
6	22980.00	-	-	-	-	-	-	-
7	#28725.00	-	-	-	-	-	-	-
8	#34470.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

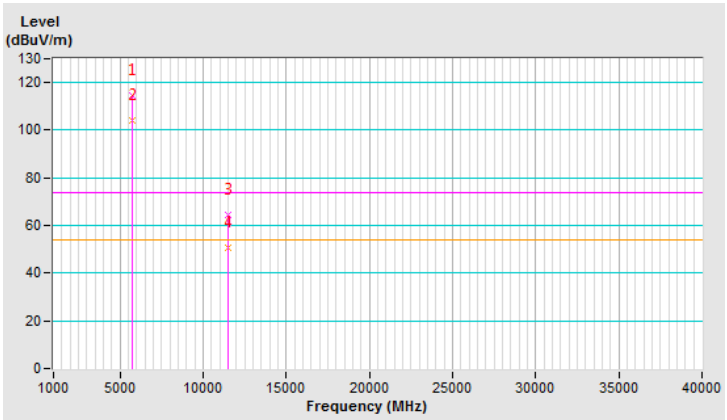


操 作 模 式 ：	發射	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 149：5745 MHz (OOBE)	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 07 月 08 日	測 試 者 ：	李哲銘

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5633.60	63.8 PK	68.2	-4.4	1.00 H	45	51.1	12.7
2	#5984.00	63.1 PK	68.2	-5.1	1.00 H	45	49.3	13.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

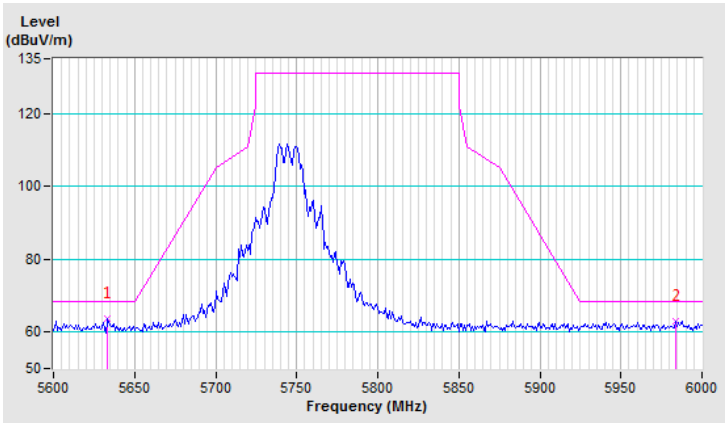


操 作 模 式 ：	發射	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 149：5745 MHz (OOBE)	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 07 月 08 日	測 試 者 ：	李哲銘

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5636.80	64.8 PK	68.2	-3.4	1.09 V	35	52.1	12.7
2	#5958.40	63.5 PK	68.2	-4.7	1.09 V	35	49.9	13.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

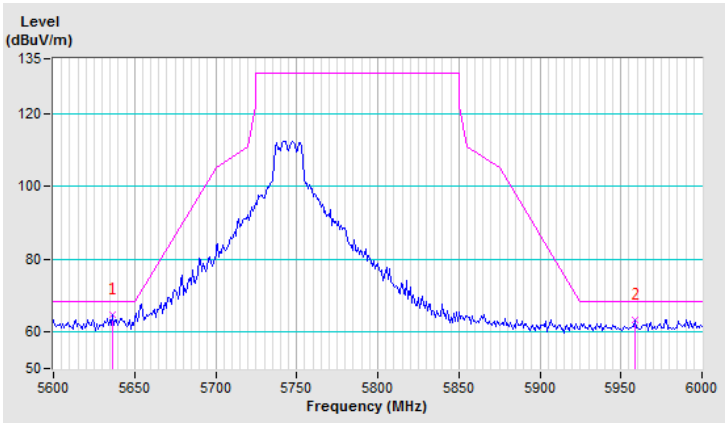


操 作 模 式 ：	發射	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 157：5785 MHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 07 月 08 日	測 試 者 ：	李哲銘

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5785.00	113.7 PK			1.00 H	38	71.1	42.6
2	*5785.00	103.3 AV			1.00 H	38	60.7	42.6
3	11570.00	63.8 PK	74.0	-10.2	2.45 H	228	39.8	24.0
4	11570.00	50.0 AV	54.0	-4.0	2.45 H	228	26.0	24.0
5	#17355.00	-	-	-	-	-	-	-
6	#23140.00	-	-	-	-	-	-	-
7	#28925.00	-	-	-	-	-	-	-
8	#34710.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

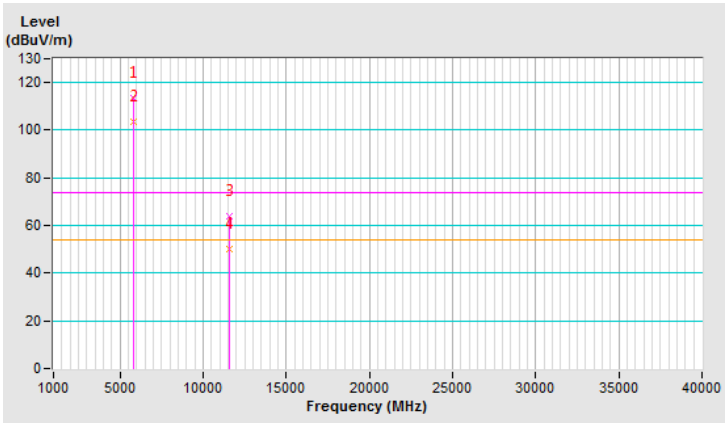


操 作 模 式 ：	發射	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 157：5785 MHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 07 月 08 日	測 試 者 ：	李哲銘

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5785.00	114.4 PK			1.10 V	36	71.8	42.6
2	*5785.00	103.8 AV			1.10 V	36	61.2	42.6
3	11570.00	64.5 PK	74.0	-9.5	2.01 V	174	40.5	24.0
4	11570.00	50.7 AV	54.0	-3.3	2.01 V	174	26.7	24.0
5	#17355.00	-	-	-	-	-	-	-
6	#23140.00	-	-	-	-	-	-	-
7	#28925.00	-	-	-	-	-	-	-
8	#34710.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

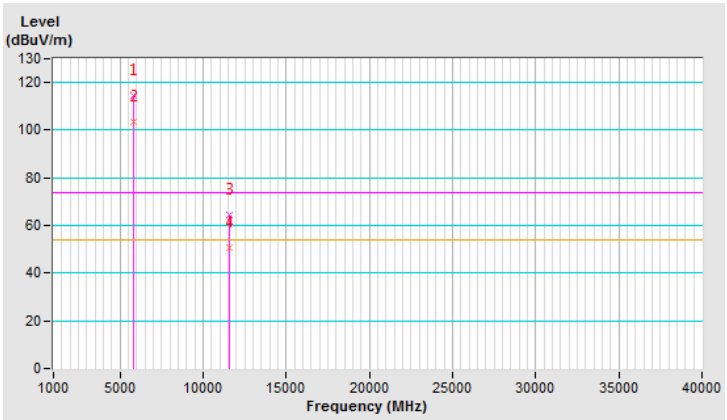


操 作 模 式 ：	發射	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 157：5785 MHz (OOBE)	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 07 月 08 日	測 試 者 ：	李哲銘

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5610.40	62.8 PK	68.2	-5.4	1.00 H	38	50.1	12.7
2	#5996.80	64.3 PK	68.2	-3.9	1.00 H	38	50.5	13.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

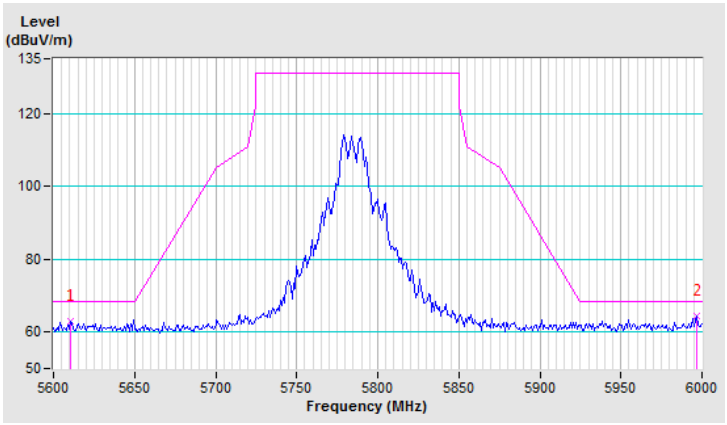


操 作 模 式 ：	發射	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 157：5785 MHz (OOBE)	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 07 月 08 日	測 試 者 ：	李哲銘

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5623.20	62.5 PK	68.2	-5.7	1.10 V	36	49.8	12.7
2	#5958.40	62.9 PK	68.2	-5.3	1.10 V	36	49.3	13.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

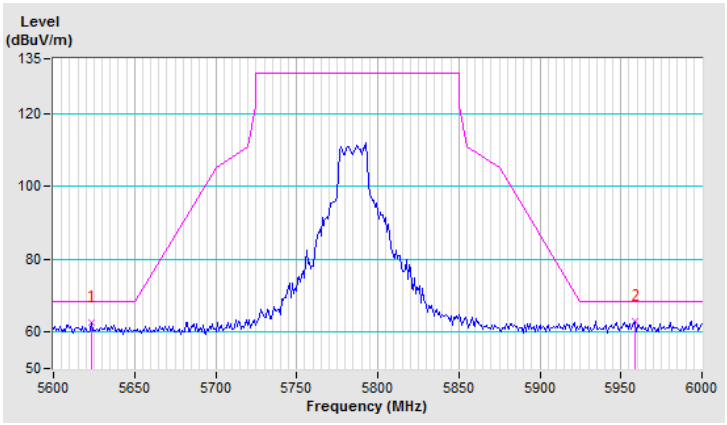


操 作 模 式 ：	發射	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 165：5825 MHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 07 月 08 日	測 試 者 ：	李哲銘

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5825.00	113.6 PK			1.00 H	44	71.0	42.6
2	*5825.00	103.3 AV			1.00 H	44	60.7	42.6
3	11650.00	63.1 PK	74.0	-10.9	2.69 H	227	39.5	23.6
4	11650.00	49.5 AV	54.0	-4.5	2.69 H	227	25.9	23.6
5	#17475.00	-	-	-	-	-	-	-
6	#23300.00	-	-	-	-	-	-	-
7	#29125.00	-	-	-	-	-	-	-
8	#34950.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

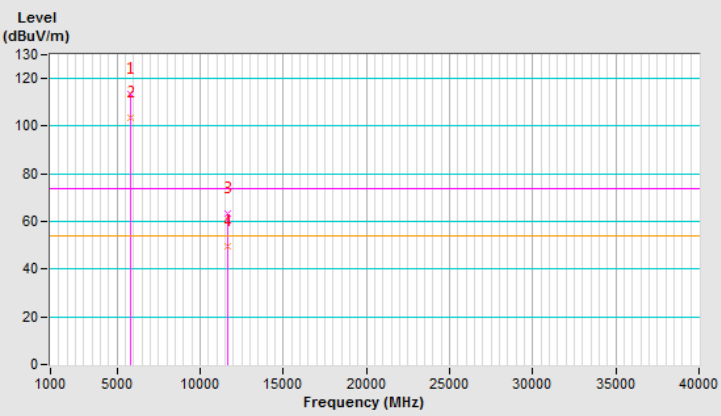


操 作 模 式 ：	發射	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 165：5825 MHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 07 月 08 日	測 試 者 ：	李哲銘

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5825.00	114.1 PK			1.00 V	28	71.5	42.6
2	*5825.00	103.9 AV			1.00 V	28	61.3	42.6
3	11650.00	63.8 PK	74.0	-10.2	2.87 V	152	40.2	23.6
4	11650.00	50.0 AV	54.0	-4.0	2.87 V	152	26.4	23.6
5	#17475.00	-	-	-	-	-	-	-
6	#23300.00	-	-	-	-	-	-	-
7	#29125.00	-	-	-	-	-	-	-
8	#34950.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

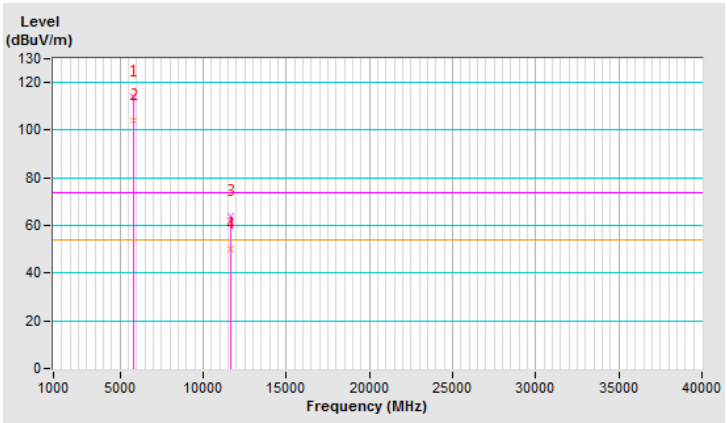


操 作 模 式 ：	發射	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 165：5825 MHz (OOBE)	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 07 月 08 日	測 試 者 ：	李哲銘

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5624.00	63.0 PK	68.2	-5.2	1.00 H	44	50.3	12.7
2	#6000.00	64.2 PK	68.2	-4.0	1.00 H	44	50.4	13.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

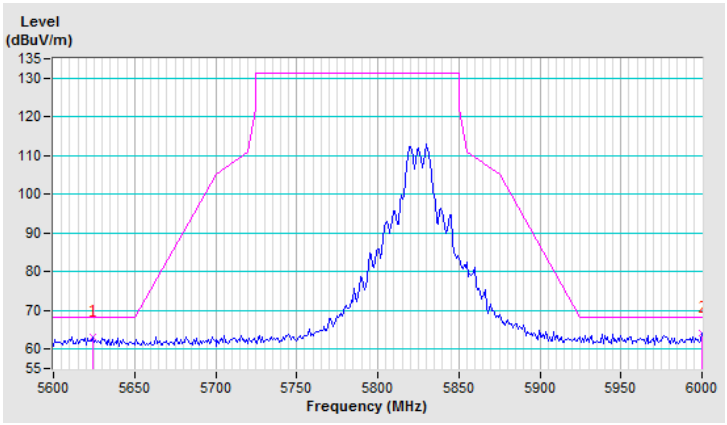


操 作 模 式 ：	發射	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 165：5825 MHz (OOBE)	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 07 月 08 日	測 試 者 ：	李哲銘

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5644.80	63.1 PK	68.2	-5.1	1.00 V	28	50.4	12.7
2	#6000.00	62.9 PK	68.2	-5.3	1.00 V	28	49.1	13.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

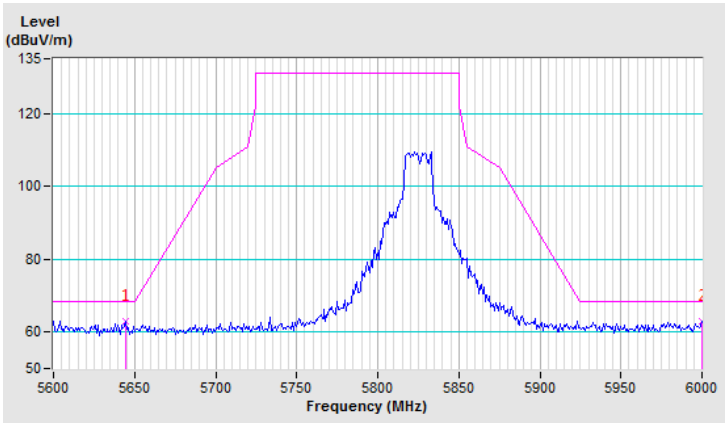


802.11ax (HE20)

操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA-MIMO
基 本 波 頻 率 ：	CH 36：5180 MHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 07 月 10 日	測 試 者 ：	李哲銘

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	69.0 PK	74.0	-5.0	1.05 H	336	56.4	12.6
2	5150.00	51.7 AV	54.0	-2.3	1.05 H	336	39.1	12.6
3	*5180.00	112.3 PK			1.09 H	337	70.8	41.5
4	*5180.00	100.1 AV			1.09 H	337	58.6	41.5
5	#10360.00	62.2 PK	68.2	-6.0	1.95 H	218	39.7	22.5
6	15540.00	-	-	-	-	-	-	-
7	20720.00	-	-	-	-	-	-	-
8	#25900.00	-	-	-	-	-	-	-
9	#31080.00	-	-	-	-	-	-	-
10	#36260.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

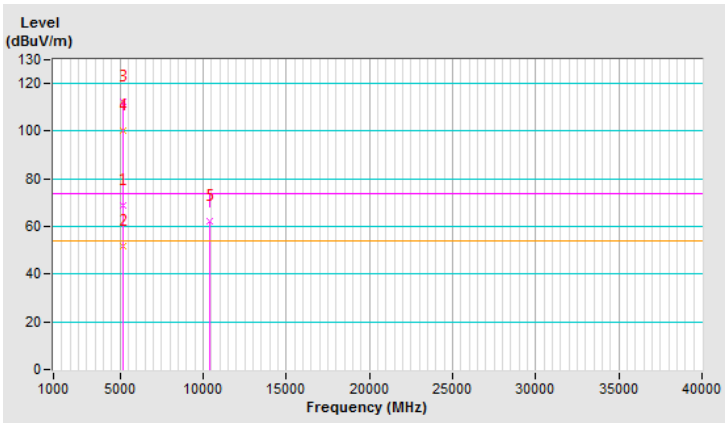


操作模式：	發射	調變技術：	OFDMA-MIMO
基本波頻率：	CH 36：5180 MHz	測試儀器：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量測場地溫度：	25℃	量測場地濕度：	70%RH
測試日期：	108 年 07 月 10 日	測試者：	李哲銘

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	70.5 PK	74.0	-3.5	1.00 V	19	57.9	12.6
2	5150.00	53.0 AV	54.0	-1.0	1.00 V	19	40.4	12.6
3	*5180.00	113.1 PK			1.00 V	20	71.6	41.5
4	*5180.00	100.5 AV			1.00 V	20	59.0	41.5
5	#10360.00	63.2 PK	68.2	-5.0	2.94 V	185	40.7	22.5
6	15540.00	-	-	-	-	-	-	-
7	20720.00	-	-	-	-	-	-	-
8	#25900.00	-	-	-	-	-	-	-
9	#31080.00	-	-	-	-	-	-	-
10	#36260.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

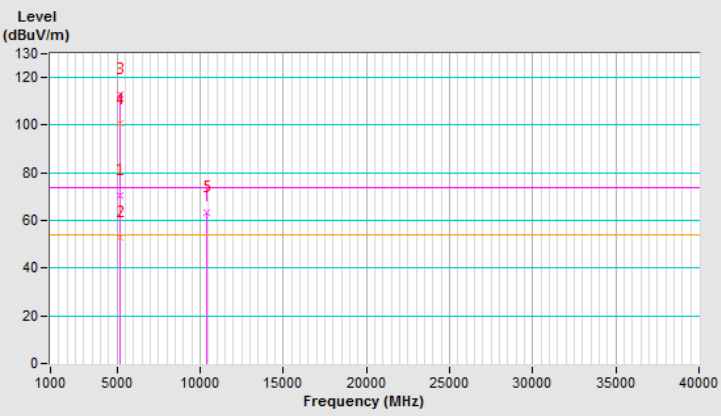


操作模式：	發射	調變技術：	OFDMA-MIMO
基本波頻率：	CH 40：5200 MHz	測試儀器：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量測場地溫度：	25℃	量測場地濕度：	70%RH
測試日期：	108 年 07 月 10 日	測試者：	李哲銘

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	67.3 PK	74.0	-6.7	1.09 H	335	54.7	12.6
2	5150.00	52.1 AV	54.0	-1.9	1.09 H	335	39.5	12.6
3	*5200.00	117.1 PK			1.00 H	340	75.6	41.5
4	*5200.00	106.4 AV			1.00 H	340	64.9	41.5
5	#10400.00	62.5 PK	68.2	-5.7	1.47 H	265	39.6	22.9
6	15600.00	-	-	-	-	-	-	-
7	20800.00	-	-	-	-	-	-	-
8	#26000.00	-	-	-	-	-	-	-
9	31200.00	-	-	-	-	-	-	-
10	#36400.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

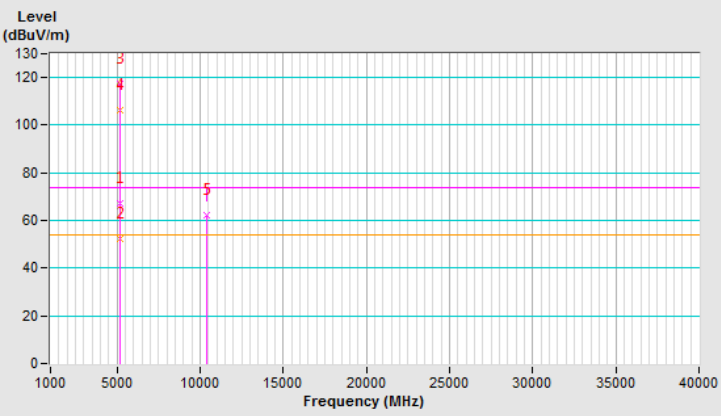


操作模式：	發射	調變技術：	OFDMA-MIMO
基本波頻率：	CH 40：5200 MHz	測試儀器：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量測場地溫度：	25℃	量測場地濕度：	70%RH
測試日期：	108 年 07 月 10 日	測試者：	李哲銘

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	68.1 PK	74.0	-5.9	1.00 V	26	55.5	12.6
2	5150.00	52.8 AV	54.0	-1.2	1.00 V	26	40.2	12.6
3	*5200.00	117.8 PK			1.00 V	18	76.3	41.5
4	*5200.00	107.0 AV			1.00 V	18	65.5	41.5
5	#10400.00	63.5 PK	68.2	-4.7	2.14 V	185	40.6	22.9
6	15600.00	-	-	-	-	-	-	-
7	20800.00	-	-	-	-	-	-	-
8	#26000.00	-	-	-	-	-	-	-
9	31200.00	-	-	-	-	-	-	-
10	#36400.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

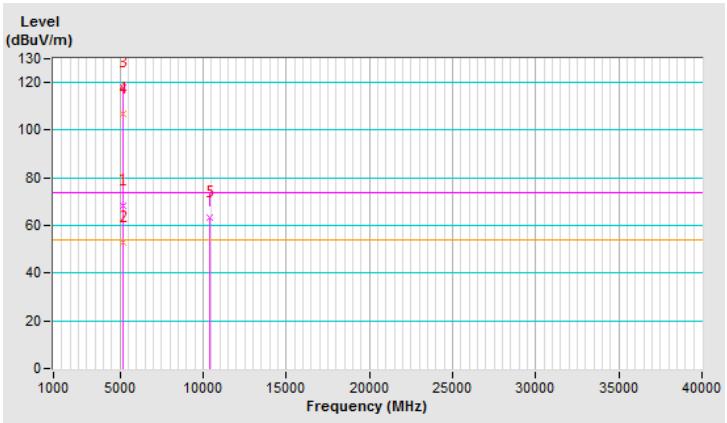


操作模式：	發射	調變技術：	OFDMA-MIMO
基本波頻率：	CH 48：5240 MHz	測試儀器：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量測場地溫度：	25℃	量測場地濕度：	70%RH
測試日期：	108 年 07 月 10 日	測試者：	李哲銘

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5240.00	114.3 PK			1.01 H	343	73.1	41.2
2	*5240.00	102.9 AV			1.01 H	343	61.7	41.2
3	5350.00	60.6 PK	74.0	-13.4	1.12 H	341	48.2	12.4
4	5350.00	47.7 AV	54.0	-6.3	1.12 H	341	35.3	12.4
5	#10480.00	62.0 PK	68.2	-6.2	1.62 H	244	39.2	22.8
6	15720.00	-	-	-	-	-	-	-
7	20960.00	-	-	-	-	-	-	-
8	#26200.00	-	-	-	-	-	-	-
9	31440.00	-	-	-	-	-	-	-
10	#36680.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

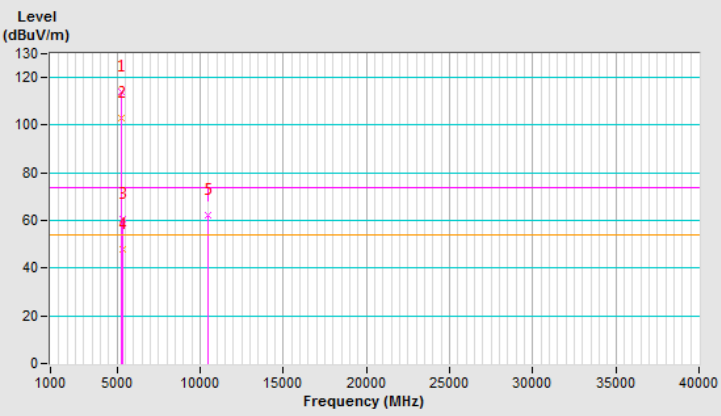


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA-MIMO
基 本 波 頻 率 ：	CH 48：5240 MHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 07 月 10 日	測 試 者 ：	李哲銘

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5240.00	115.2 PK			1.00 V	30	74.0	41.2
2	*5240.00	103.7 AV			1.00 V	30	62.5	41.2
3	5350.00	61.3 PK	74.0	-12.7	1.02 V	25	48.9	12.4
4	5350.00	48.1 AV	54.0	-5.9	1.02 V	25	35.7	12.4
5	#10480.00	63.4 PK	68.2	-4.8	2.25 V	142	40.6	22.8
6	15720.00	-	-	-	-	-	-	-
7	20960.00	-	-	-	-	-	-	-
8	#26200.00	-	-	-	-	-	-	-
9	31440.00	-	-	-	-	-	-	-
10	#36680.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

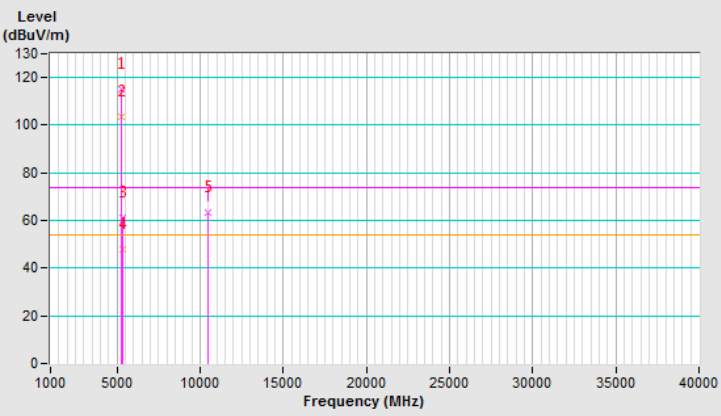


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA-MIMO
基 本 波 頻 率 ：	CH 149：5745 MHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 07 月 08 日	測 試 者 ：	李哲銘

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5745.00	113.2 PK			1.00 H	45	70.7	42.5
2	*5745.00	102.2 AV			1.00 H	45	59.7	42.5
3	11490.00	63.8 PK	74.0	-10.2	1.65 H	241	39.7	24.1
4	11490.00	49.9 AV	54.0	-4.1	1.65 H	241	25.8	24.1
5	#17235.00	-	-	-	-	-	-	-
6	22980.00	-	-	-	-	-	-	-
7	#28725.00	-	-	-	-	-	-	-
8	#34470.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

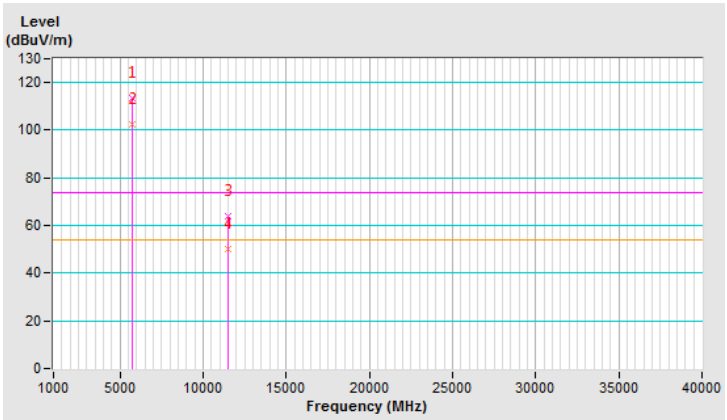


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA-MIMO
基 本 波 頻 率 ：	CH 149：5745 MHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 07 月 08 日	測 試 者 ：	李哲銘

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5745.00	114.0 PK			1.00 V	39	71.5	42.5
2	*5745.00	102.8 AV			1.00 V	39	60.3	42.5
3	11490.00	64.6 PK	74.0	-9.4	2.74 V	185	40.5	24.1
4	11490.00	50.8 AV	54.0	-3.2	2.74 V	185	26.7	24.1
5	#17235.00	-	-	-	-	-	-	-
6	22980.00	-	-	-	-	-	-	-
7	#28725.00	-	-	-	-	-	-	-
8	#34470.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

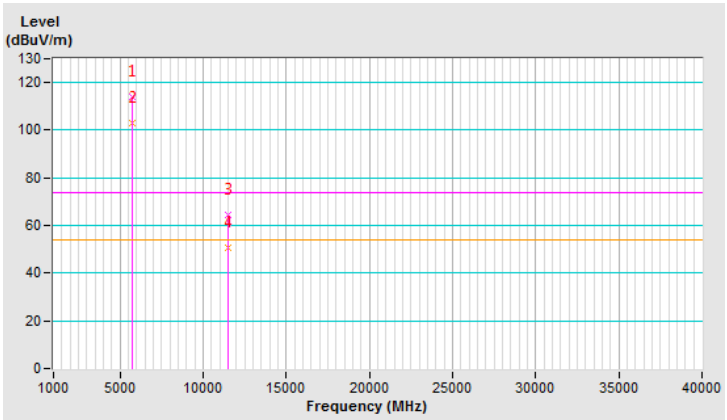


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA-MIMO
基 本 波 頻 率 ：	CH 149：5745 MHz (OOBE)	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 07 月 08 日	測 試 者 ：	李哲銘

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5628.80	62.7 PK	68.2	-5.5	1.00 H	45	50.0	12.7
2	#5948.00	63.5 PK	68.2	-4.7	1.00 H	45	49.9	13.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

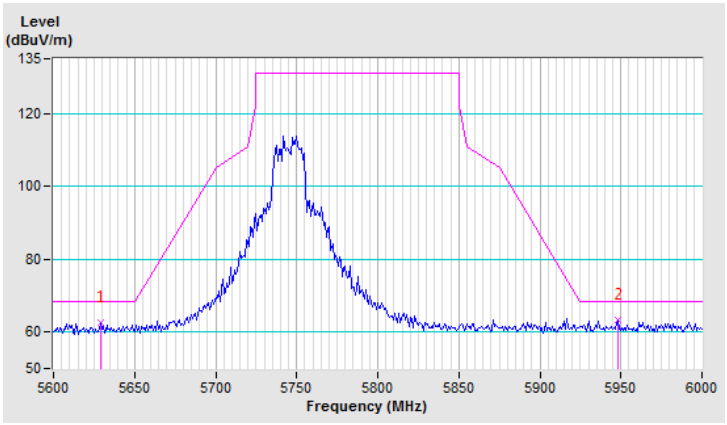


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA-MIMO
基 本 波 頻 率 ：	CH 149：5745 MHz (OOBE)	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 07 月 08 日	測 試 者 ：	李哲銘

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5612.00	62.9 PK	68.2	-5.3	1.00 V	39	50.2	12.7
2	#5951.20	63.1 PK	68.2	-5.1	1.00 V	39	49.5	13.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

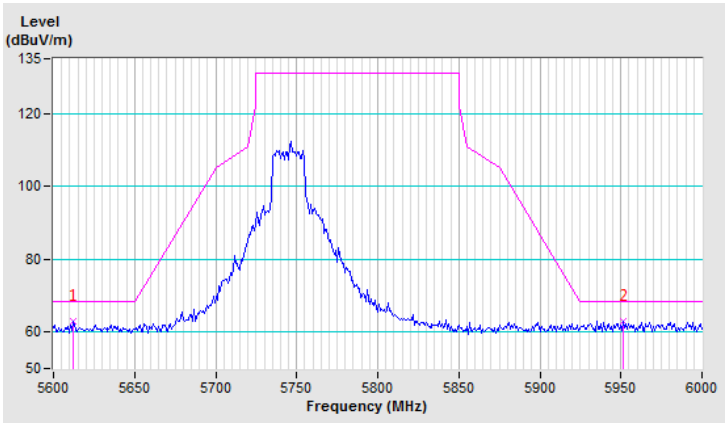


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA-MIMO
基 本 波 頻 率 ：	CH 157：5785 MHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 07 月 08 日	測 試 者 ：	李哲銘

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5785.00	114.6 PK			1.00 H	42	72.0	42.6
2	*5785.00	103.3 AV			1.00 H	42	60.7	42.6
3	11570.00	63.7 PK	74.0	-10.3	1.95 H	201	39.7	24.0
4	11570.00	50.1 AV	54.0	-3.9	1.95 H	201	26.1	24.0
5	#17355.00	-	-	-	-	-	-	-
6	#23140.00	-	-	-	-	-	-	-
7	#28925.00	-	-	-	-	-	-	-
8	#34710.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

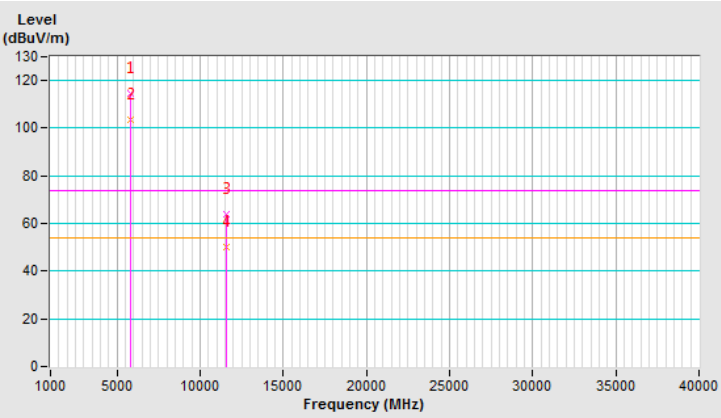


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA-MIMO
基 本 波 頻 率 ：	CH 157：5785 MHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 07 月 08 日	測 試 者 ：	李哲銘

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5785.00	115.3 PK			1.00 V	37	72.7	42.6
2	*5785.00	104.1 AV			1.00 V	37	61.5	42.6
3	11570.00	64.7 PK	74.0	-9.3	2.31 V	152	40.7	24.0
4	11570.00	50.6 AV	54.0	-3.4	2.31 V	152	26.6	24.0
5	#17355.00	-	-	-	-	-	-	-
6	#23140.00	-	-	-	-	-	-	-
7	#28925.00	-	-	-	-	-	-	-
8	#34710.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

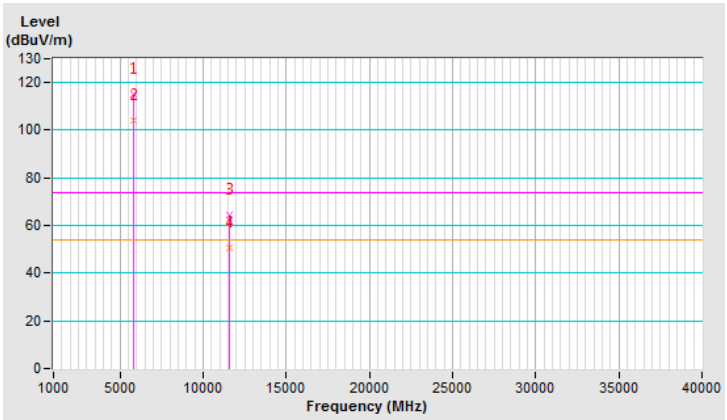


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA-MIMO
基 本 波 頻 率 ：	CH 157：5785 MHz (OOBE)	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 07 月 08 日	測 試 者 ：	李哲銘

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5629.60	62.6 PK	68.2	-5.6	1.00 H	42	49.9	12.7
2	#5998.40	63.0 PK	68.2	-5.2	1.00 H	42	49.2	13.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

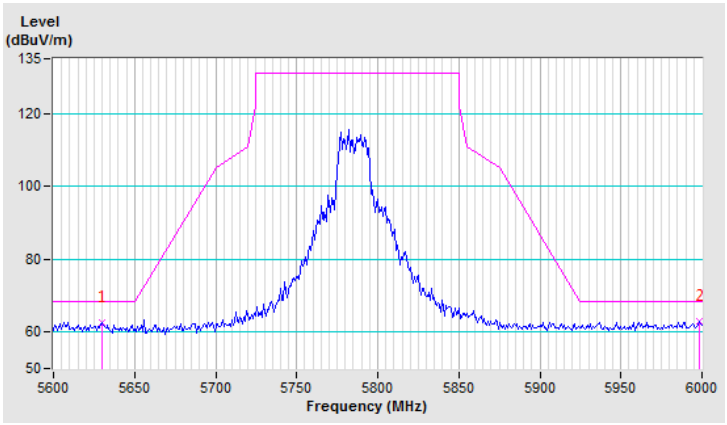


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA-MIMO
基 本 波 頻 率 ：	CH 157：5785 MHz (OOBE)	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 07 月 08 日	測 試 者 ：	李哲銘

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5612.80	62.6 PK	68.2	-5.6	1.00 V	37	49.9	12.7
2	#5997.60	63.5 PK	68.2	-4.7	1.00 V	37	49.7	13.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

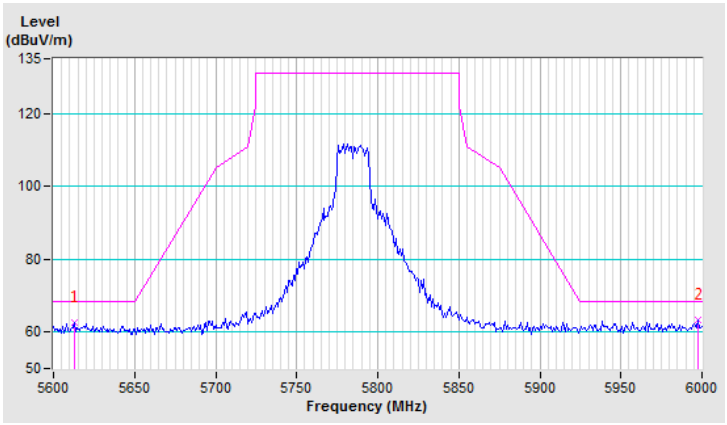


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA-MIMO
基 本 波 頻 率 ：	CH 165：5825 MHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 07 月 08 日	測 試 者 ：	李哲銘

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5825.00	113.0 PK			1.00 H	37	70.4	42.6
2	*5825.00	102.8 AV			1.00 H	37	60.2	42.6
3	11650.00	62.9 PK	74.0	-11.1	1.45 H	281	39.3	23.6
4	11650.00	49.5 AV	54.0	-4.5	1.45 H	281	25.9	23.6
5	#17475.00	-	-	-	-	-	-	-
6	#23300.00	-	-	-	-	-	-	-
7	#29125.00	-	-	-	-	-	-	-
8	#34950.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

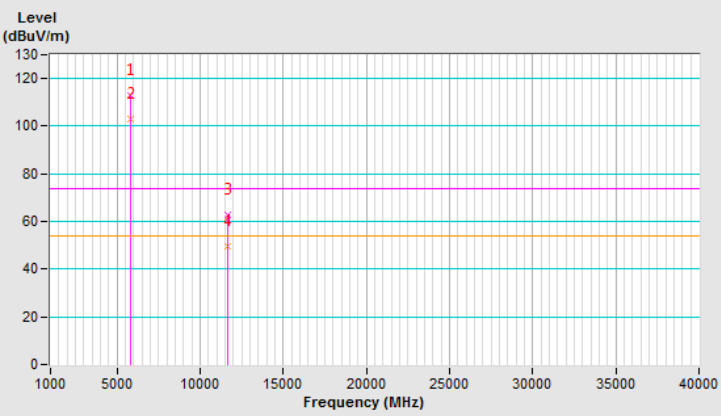


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA-MIMO
基 本 波 頻 率 ：	CH 165：5825 MHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 07 月 08 日	測 試 者 ：	李哲銘

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5825.00	113.9 PK			1.00 V	34	71.3	42.6
2	*5825.00	103.6 AV			1.00 V	34	61.0	42.6
3	11650.00	64.1 PK	74.0	-9.9	1.96 V	236	40.5	23.6
4	11650.00	49.7 AV	54.0	-4.3	1.96 V	236	26.1	23.6
5	#17475.00	-	-	-	-	-	-	-
6	#23300.00	-	-	-	-	-	-	-
7	#29125.00	-	-	-	-	-	-	-
8	#34950.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

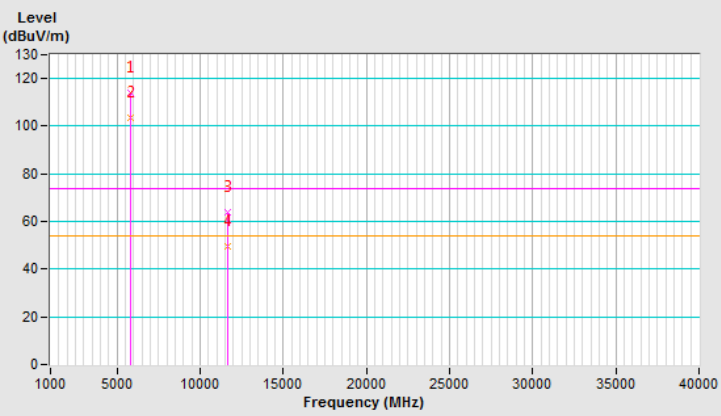


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA-MIMO
基 本 波 頻 率 ：	CH 165：5825 MHz (OOBE)	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 07 月 08 日	測 試 者 ：	李哲銘

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5628.00	62.7 PK	68.2	-5.5	1.00 H	37	50.0	12.7
2	#5982.40	62.4 PK	68.2	-5.8	1.00 H	37	48.6	13.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

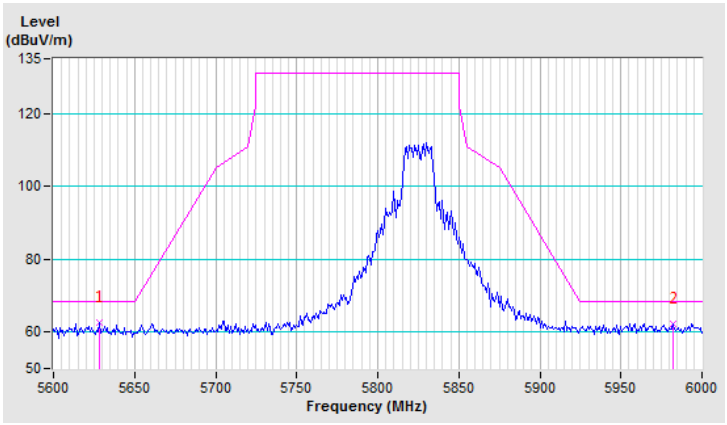


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA-MIMO
基 本 波 頻 率 ：	CH 165：5825 MHz (OOBE)	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 07 月 08 日	測 試 者 ：	李哲銘

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5623.20	63.3 PK	68.2	-4.9	1.00 V	34	50.6	12.7
2	#5990.40	63.5 PK	68.2	-4.7	1.00 V	34	49.7	13.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

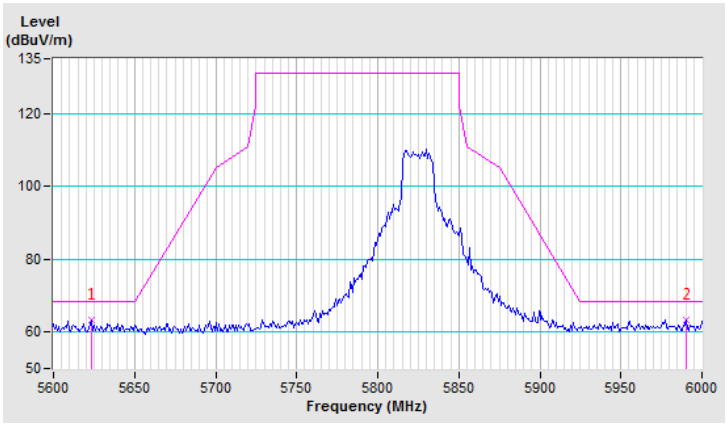


802.11ax (HE40)

操作模式：	發射	調變技術：	OFDMA-MIMO
基本波頻率：	CH 38：5190 MHz	測試儀器：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=3kHz
量測場地溫度：	25℃	量測場地濕度：	70%RH
測試日期：	108 年 07 月 10 日	測試者：	李哲銘

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	68.6 PK	74.0	-5.4	1.05 H	346	56.0	12.6
2	5150.00	51.8 AV	54.0	-2.2	1.05 H	346	39.2	12.6
3	*5190.00	106.9 PK			1.01 H	333	65.4	41.5
4	*5190.00	94.9 AV			1.01 H	333	53.4	41.5
5	#10380.00	62.3 PK	68.2	-5.9	1.58 H	196	39.6	22.7
6	15570.00	-	-	-	-	-	-	-
7	20760.00	-	-	-	-	-	-	-
8	#25950.00	-	-	-	-	-	-	-
9	#31140.00	-	-	-	-	-	-	-
10	#36330.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

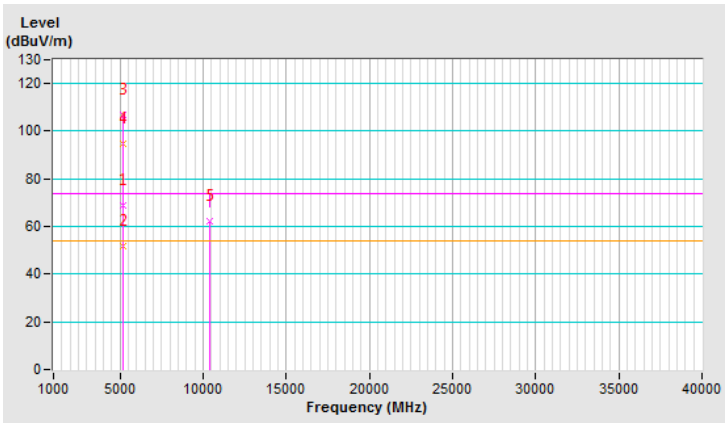


操作模式：	發射	調變技術：	OFDMA-MIMO
基本波頻率：	CH 38：5190 MHz	測試儀器：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=3kHz
量測場地溫度：	25℃	量測場地濕度：	70%RH
測試日期：	108 年 07 月 10 日	測試者：	李哲銘

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	69.5 PK	74.0	-4.5	1.00 V	17	56.9	12.6
2	5150.00	52.6 AV	54.0	-1.4	1.00 V	17	40.0	12.6
3	*5190.00	107.8 PK			1.02 V	21	66.3	41.5
4	*5190.00	95.7 AV			1.02 V	21	54.2	41.5
5	#10380.00	63.2 PK	68.2	-5.0	2.25 V	169	40.5	22.7
6	15570.00	-	-	-	-	-	-	-
7	20760.00	-	-	-	-	-	-	-
8	#25950.00	-	-	-	-	-	-	-
9	#31140.00	-	-	-	-	-	-	-
10	#36330.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

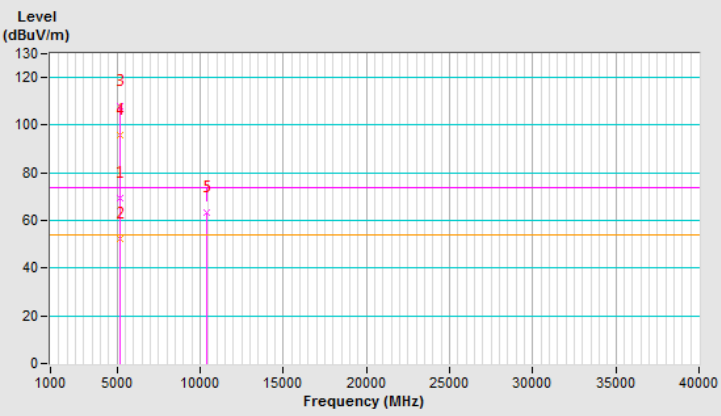


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA-MIMO
基 本 波 頻 率 ：	CH 46：5230 MHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=3kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 07 月 10 日	測 試 者 ：	李哲銘

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	65.2 PK	74.0	-8.8	1.01 H	340	52.6	12.6
2	5150.00	51.6 AV	54.0	-2.4	1.01 H	340	39.0	12.6
3	*5230.00	110.2 PK			1.00 H	346	68.9	41.3
4	*5230.00	98.4 AV			1.00 H	346	57.1	41.3
5	5350.00	60.3 PK	74.0	-13.7	1.08 H	330	47.9	12.4
6	5350.00	47.5 AV	54.0	-6.5	1.08 H	330	35.1	12.4
7	#10460.00	62.6 PK	68.2	-5.6	1.69 H	177	39.7	22.9
8	15690.00	-	-	-	-	-	-	-
9	20920.00	-	-	-	-	-	-	-
10	#26150.00	-	-	-	-	-	-	-
11	31380.00	-	-	-	-	-	-	-
12	#36610.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

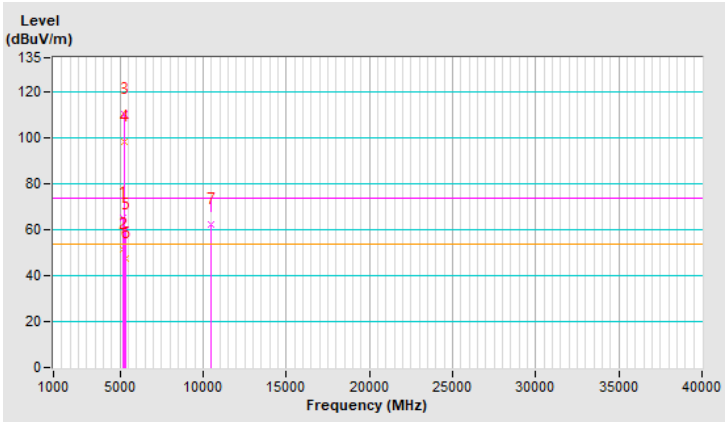


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA-MIMO
基 本 波 頻 率 ：	CH 46：5230 MHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=3kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 07 月 10 日	測 試 者 ：	李哲銘

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	65.8 PK	74.0	-8.2	1.00 V	22	53.2	12.6
2	5150.00	52.5 AV	54.0	-1.5	1.00 V	22	39.9	12.6
3	*5230.00	111.1 PK			1.00 V	21	69.8	41.3
4	*5230.00	99.3 AV			1.00 V	21	58.0	41.3
5	5350.00	60.8 PK	74.0	-13.2	1.03 V	25	48.4	12.4
6	5350.00	48.0 AV	54.0	-6.0	1.03 V	25	35.6	12.4
7	#10460.00	63.5 PK	68.2	-4.7	1.98 V	203	40.6	22.9
8	15690.00	-	-	-	-	-	-	-
9	20920.00	-	-	-	-	-	-	-
10	#26150.00	-	-	-	-	-	-	-
11	31380.00	-	-	-	-	-	-	-
12	#36610.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

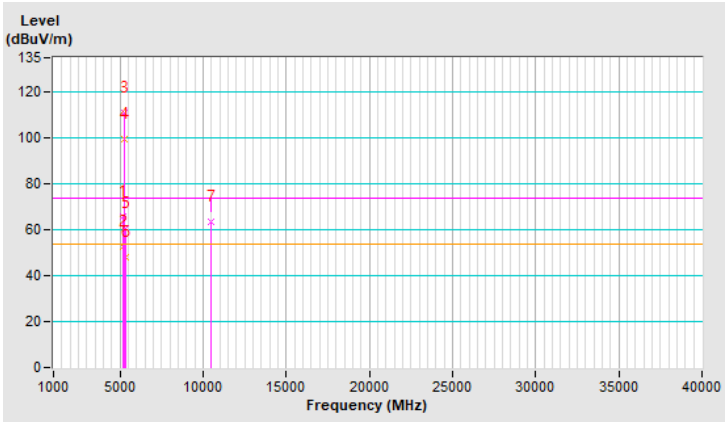


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA-MIMO
基 本 波 頻 率 ：	CH 151：5755 MHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=3kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 07 月 08 日	測 試 者 ：	李哲銘

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5755.00	111.7 PK			1.00 H	39	69.2	42.5
2	*5755.00	101.1 AV			1.00 H	39	58.6	42.5
3	11510.00	63.4 PK	74.0	-10.6	1.98 H	246	39.5	23.9
4	11510.00	49.8 AV	54.0	-4.2	1.98 H	246	25.9	23.9
5	#17265.00	-	-	-	-	-	-	-
6	23020.00	-	-	-	-	-	-	-
7	#28775.00	-	-	-	-	-	-	-
8	#34530.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

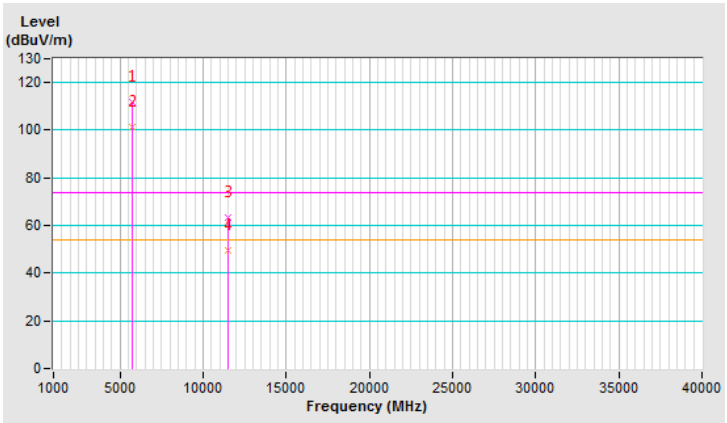


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA-MIMO
基 本 波 頻 率 ：	CH 151：5755 MHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=3kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 07 月 08 日	測 試 者 ：	李哲銘

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5755.00	112.6 PK			1.15 V	40	70.1	42.5
2	*5755.00	101.7 AV			1.15 V	40	59.2	42.5
3	11510.00	64.5 PK	74.0	-9.5	1.53 V	278	40.6	23.9
4	11510.00	50.2 AV	54.0	-3.8	1.53 V	278	26.3	23.9
5	#17265.00	-	-	-	-	-	-	-
6	23020.00	-	-	-	-	-	-	-
7	#28775.00	-	-	-	-	-	-	-
8	#34530.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

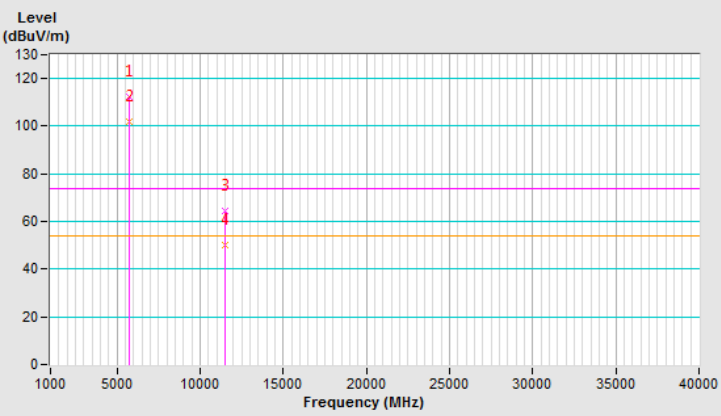


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA-MIMO
基 本 波 頻 率 ：	CH 151：5755 MHz (OOBE)	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=3kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 07 月 08 日	測 試 者 ：	李哲銘

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5607.20	64.3 PK	68.2	-3.9	1.00 H	39	51.6	12.7
2	#5986.40	63.2 PK	68.2	-5.0	1.00 H	39	49.4	13.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

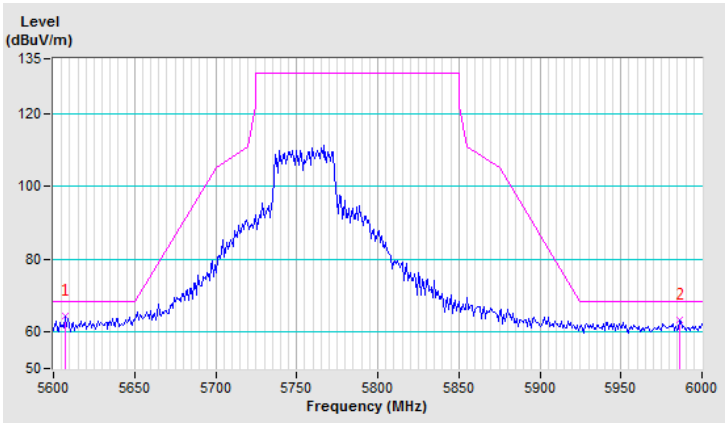


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA-MIMO
基 本 波 頻 率 ：	CH 151：5755 MHz (OOBE)	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=3kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 07 月 08 日	測 試 者 ：	李哲銘

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5649.60	64.2 PK	68.2	-4.0	1.15 V	40	51.6	12.6
2	#5983.20	63.6 PK	68.2	-4.6	1.15 V	40	49.8	13.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

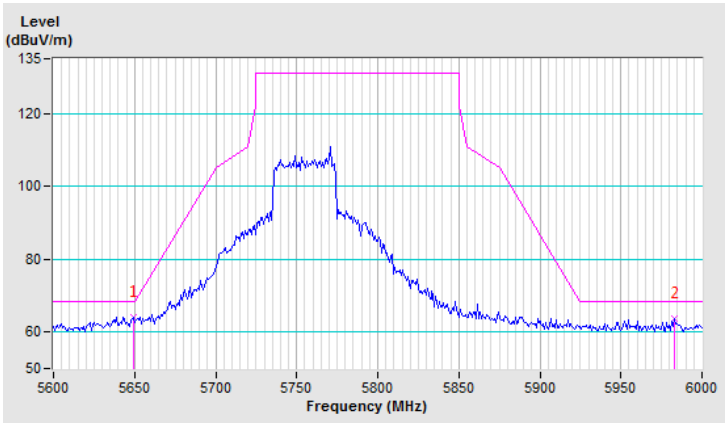


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA-MIMO
基 本 波 頻 率 ：	CH 159：5795 MHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=3kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 07 月 08 日	測 試 者 ：	李哲銘

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5795.00	111.8 PK			1.02 H	41	69.2	42.6
2	*5795.00	101.6 AV			1.02 H	41	59.0	42.6
3	11590.00	63.5 PK	74.0	-10.5	1.63 H	132	39.7	23.8
4	11590.00	49.6 AV	54.0	-4.4	1.63 H	132	25.8	23.8
5	#17385.00	-	-	-	-	-	-	-
6	#23180.00	-	-	-	-	-	-	-
7	#28975.00	-	-	-	-	-	-	-
8	#34770.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

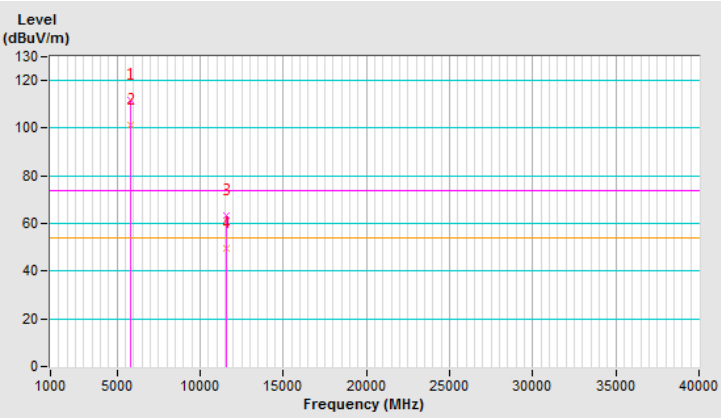


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA-MIMO
基 本 波 頻 率 ：	CH 159：5795 MHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=3kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 07 月 08 日	測 試 者 ：	李哲銘

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5795.00	112.9 PK			1.00 V	30	70.3	42.6
2	*5795.00	102.4 AV			1.00 V	30	59.8	42.6
3	11590.00	64.5 PK	74.0	-9.5	3.15 V	175	40.7	23.8
4	11590.00	50.3 AV	54.0	-3.7	3.15 V	175	26.5	23.8
5	#17385.00	-	-	-	-	-	-	-
6	#23180.00	-	-	-	-	-	-	-
7	#28975.00	-	-	-	-	-	-	-
8	#34770.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

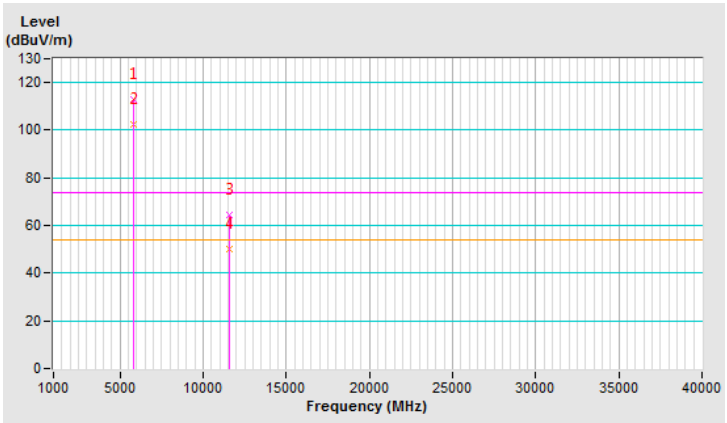


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA-MIMO
基 本 波 頻 率 ：	CH 159：5795 MHz (OOBE)	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=3kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 07 月 08 日	測 試 者 ：	李哲銘

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5647.20	63.2 PK	68.2	-5.0	1.00 H	41	50.6	12.6
2	#5935.20	65.3 PK	68.2	-2.9	1.00 H	41	51.7	13.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

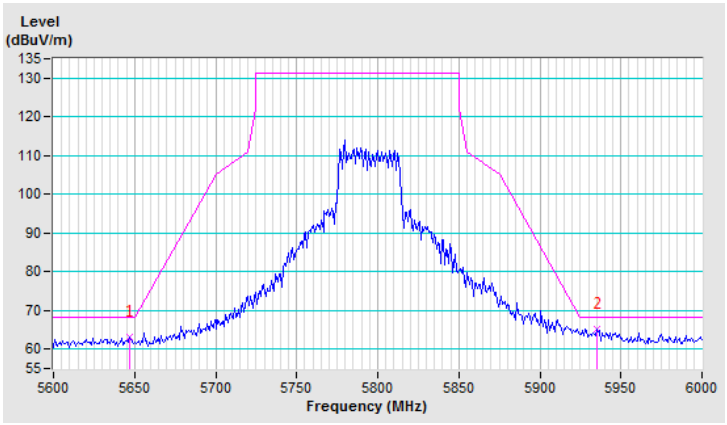


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA-MIMO
基 本 波 頻 率 ：	CH 159：5795 MHz (OOBE)	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=3kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 07 月 08 日	測 試 者 ：	李哲銘

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5648.80	62.9 PK	68.2	-5.3	1.00 V	30	50.3	12.6
2	#5937.60	64.4 PK	68.2	-3.8	1.00 V	30	50.8	13.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

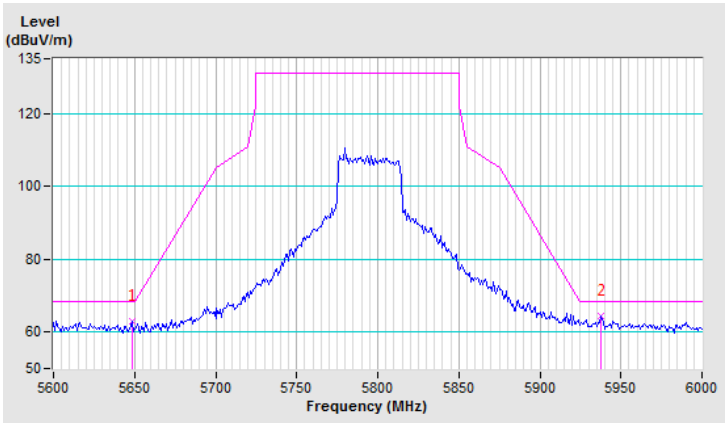


802.11ax (HE80)

操作模式：	發射	調變技術：	OFDMA-MIMO
基本波頻率：	CH 42：5210 MHz	測試儀器：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=3kHz
量測場地溫度：	25℃	量測場地濕度：	70%RH
測試日期：	108 年 07 月 10 日	測試者：	李哲銘

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	67.4 PK	74.0	-6.6	1.03 H	347	54.8	12.6
2	5150.00	51.8 AV	54.0	-2.2	1.03 H	347	39.2	12.6
3	*5210.00	104.8 PK			1.07 H	338	63.4	41.4
4	*5210.00	93.0 AV			1.07 H	338	51.6	41.4
5	5350.00	60.3 PK	74.0	-13.7	1.02 H	340	47.9	12.4
6	5350.00	47.2 AV	54.0	-6.8	1.02 H	340	34.8	12.4
7	#10420.00	62.3 PK	68.2	-5.9	1.78 H	163	39.5	22.8
8	15630.00	-	-	-	-	-	-	-
9	20840.00	-	-	-	-	-	-	-
10	#26050.00	-	-	-	-	-	-	-
11	31260.00	-	-	-	-	-	-	-
12	36470.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

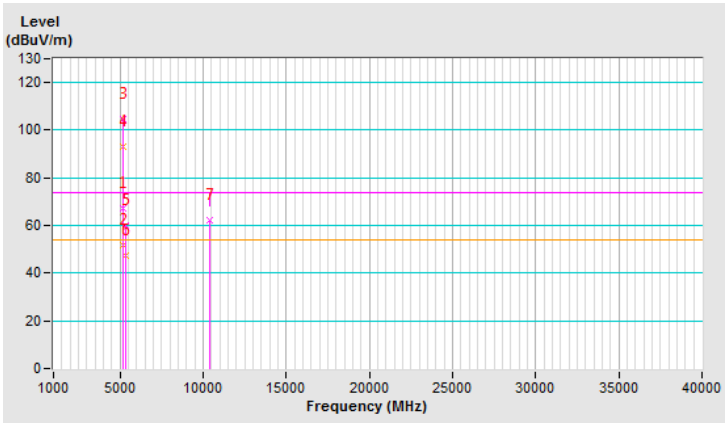


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA-MIMO
基 本 波 頻 率 ：	CH 42：5210 MHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=3kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 07 月 10 日	測 試 者 ：	李哲銘

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	68.2 PK	74.0	-5.8	1.00 V	17	55.6	12.6
2	5150.00	52.7 AV	54.0	-1.3	1.00 V	17	40.1	12.6
3	*5210.00	105.5 PK			1.01 V	27	64.1	41.4
4	*5210.00	93.7 AV			1.01 V	27	52.3	41.4
5	5350.00	60.9 PK	74.0	-13.1	1.01 V	25	48.5	12.4
6	5350.00	48.0 AV	54.0	-6.0	1.01 V	25	35.6	12.4
7	#10420.00	63.3 PK	68.2	-4.9	1.88 V	269	40.5	22.8
8	15630.00	-	-	-	-	-	-	-
9	20840.00	-	-	-	-	-	-	-
10	#26050.00	-	-	-	-	-	-	-
11	31260.00	-	-	-	-	-	-	-
12	36470.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

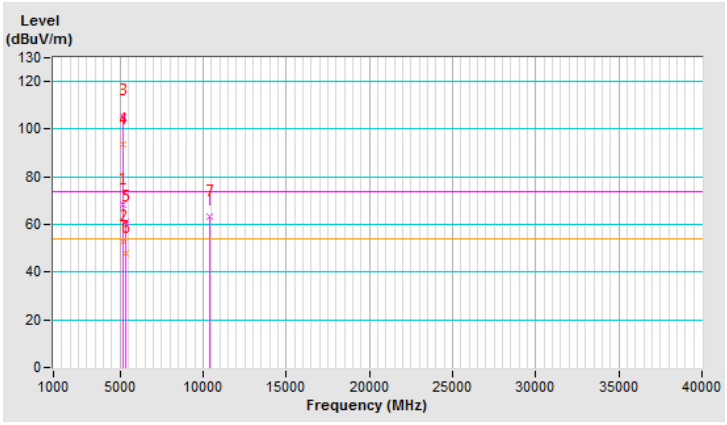


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA-MIMO
基 本 波 頻 率 ：	CH 155：5775 MHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=3kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 07 月 08 日	測 試 者 ：	李哲銘

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5775.00	108.3 PK			1.00 H	45	65.7	42.6
2	*5775.00	96.0 AV			1.00 H	45	53.4	42.6
3	11550.00	63.5 PK	74.0	-10.5	1.69 H	201	39.6	23.9
4	11550.00	49.8 AV	54.0	-4.2	1.69 H	201	25.9	23.9
5	#17325.00	-	-	-	-	-	-	-
6	23100.00	-	-	-	-	-	-	-
7	#28875.00	-	-	-	-	-	-	-
8	#34650.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

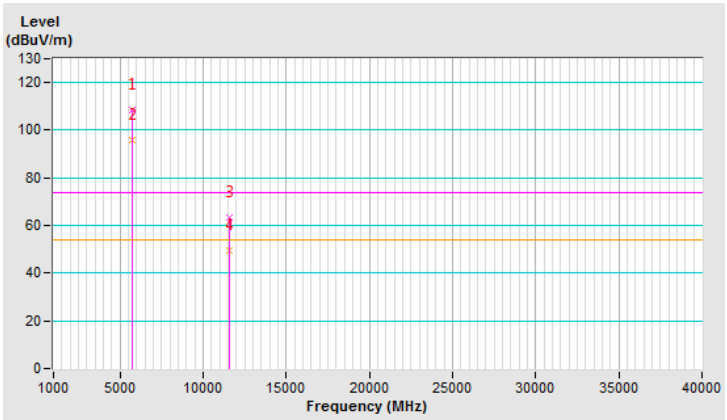


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA-MIMO
基 本 波 頻 率 ：	CH 155：5775 MHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=3kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 07 月 08 日	測 試 者 ：	李哲銘

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5775.00	108.9 PK			1.00 V	37	66.3	42.6
2	*5775.00	96.7 AV			1.00 V	37	54.1	42.6
3	11550.00	64.1 PK	74.0	-9.9	1.62 V	331	40.2	23.9
4	11550.00	50.3 AV	54.0	-3.7	1.62 V	331	26.4	23.9
5	#17325.00	-	-	-	-	-	-	-
6	23100.00	-	-	-	-	-	-	-
7	#28875.00	-	-	-	-	-	-	-
8	#34650.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

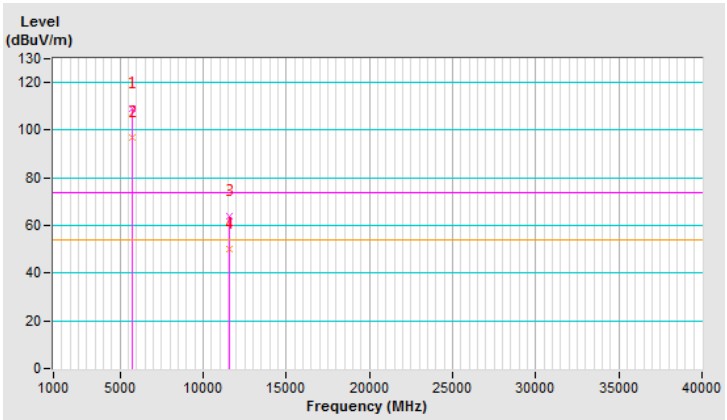


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA-MIMO
基 本 波 頻 率 ：	CH 155：5775 MHz (OOBE)	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=3kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 07 月 08 日	測 試 者 ：	李哲銘

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5634.40	65.8 PK	68.2	-2.4	1.00 H	45	53.1	12.7
2	#5944.00	66.2 PK	68.2	-2.0	1.00 H	45	52.6	13.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

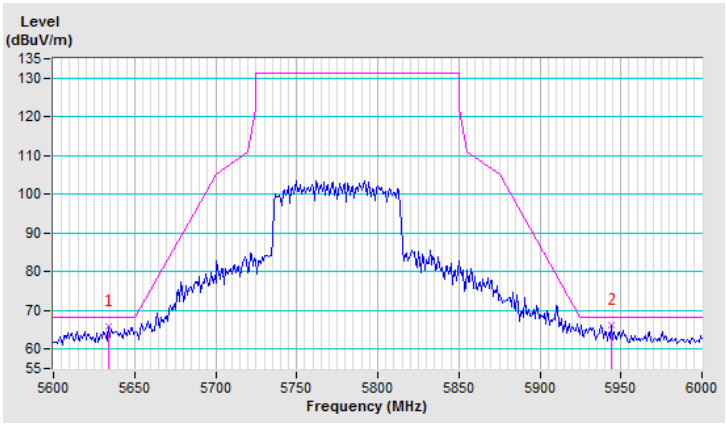


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA-MIMO
基 本 波 頻 率 ：	CH 155：5775 MHz (OOBE)	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=3kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 07 月 08 日	測 試 者 ：	李哲銘

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5648.00	67.1 PK	68.2	-1.1	1.00 V	37	54.5	12.6
2	#5939.20	66.6 PK	68.2	-1.6	1.00 V	37	53.0	13.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

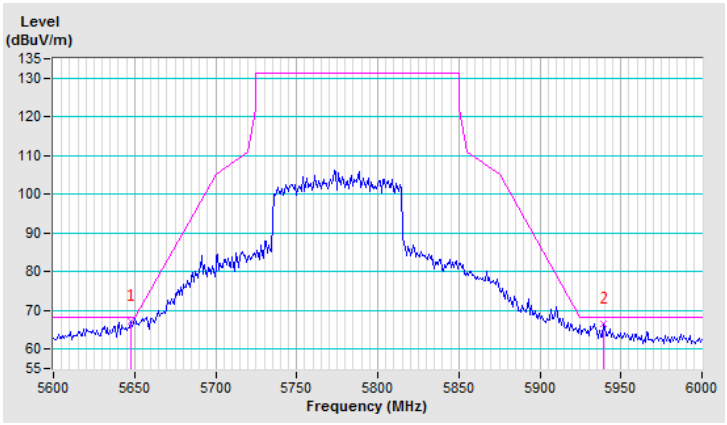

3TX


802.11a

操 作 模 式 ：	發射	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 36：5180 MHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 07 月 06 日	測 試 者 ：	李哲銘

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	69.4 PK	74.0	-4.6	1.08 H	341	56.8	12.6
2	5150.00	52.5 AV	54.0	-1.5	1.08 H	341	39.9	12.6
3	*5180.00	113.3 PK			1.04 H	334	71.8	41.5
4	*5180.00	103.8 AV			1.04 H	334	62.3	41.5
5	#10360.00	62.5 PK	68.2	-5.7	3.14 H	112	40.0	22.5
6	15540.00	-	-	-	-	-	-	-
7	20720.00	-	-	-	-	-	-	-
8	#25900.00	-	-	-	-	-	-	-
9	#31080.00	-	-	-	-	-	-	-
10	#36260.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

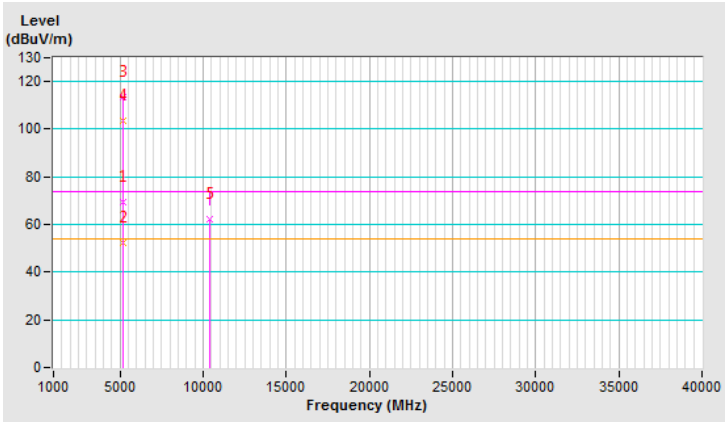


操 作 模 式 ：	發射	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 36：5180 MHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 07 月 06 日	測 試 者 ：	李哲銘

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	69.9 PK	74.0	-4.1	3.13 V	20	57.3	12.6
2	5150.00	52.8 AV	54.0	-1.2	3.13 V	20	40.2	12.6
3	*5180.00	114.0 PK			1.00 V	9	72.5	41.5
4	*5180.00	104.5 AV			1.00 V	9	63.0	41.5
5	#10360.00	63.0 PK	68.2	-5.2	1.72 V	341	40.5	22.5
6	15540.00	-	-	-	-	-	-	-
7	20720.00	-	-	-	-	-	-	-
8	#25900.00	-	-	-	-	-	-	-
9	#31080.00	-	-	-	-	-	-	-
10	#36260.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

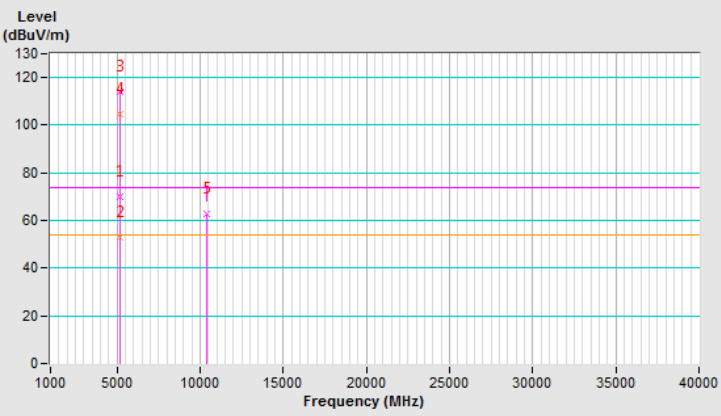


操 作 模 式 ：	發射	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 40：5200 MHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 07 月 06 日	測 試 者 ：	李哲銘

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	69.2 PK	74.0	-4.8	1.00 H	321	56.6	12.6
2	5150.00	52.3 AV	54.0	-1.7	1.00 H	321	39.7	12.6
3	*5200.00	118.2 PK			1.05 H	336	76.7	41.5
4	*5200.00	107.8 AV			1.05 H	336	66.3	41.5
5	#10400.00	63.0 PK	68.2	-5.2	1.62 H	225	40.1	22.9
6	15600.00	-	-	-	-	-	-	-
7	20800.00	-	-	-	-	-	-	-
8	#26000.00	-	-	-	-	-	-	-
9	31200.00	-	-	-	-	-	-	-
10	#36400.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

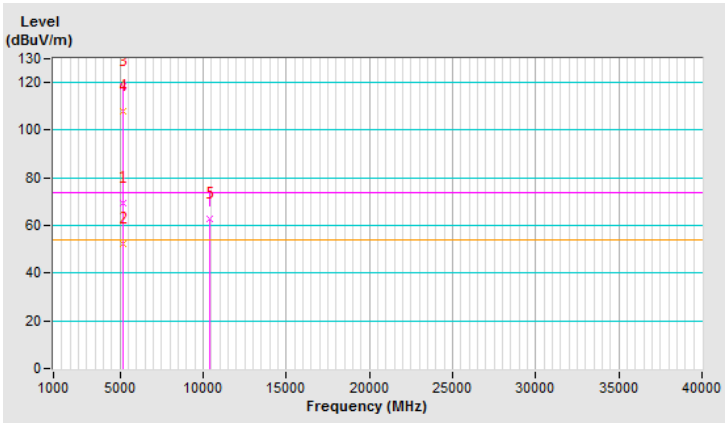


操 作 模 式 ：	發射	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 40：5200 MHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 07 月 06 日	測 試 者 ：	李哲銘

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	69.9 PK	74.0	-4.1	1.30 V	13	57.3	12.6
2	5150.00	52.7 AV	54.0	-1.3	1.30 V	13	40.1	12.6
3	*5200.00	118.8 PK			1.04 V	8	77.3	41.5
4	*5200.00	108.5 AV			1.04 V	8	67.0	41.5
5	#10400.00	63.4 PK	68.2	-4.8	2.05 V	184	40.5	22.9
6	15600.00	-	-	-	-	-	-	-
7	20800.00	-	-	-	-	-	-	-
8	#26000.00	-	-	-	-	-	-	-
9	31200.00	-	-	-	-	-	-	-
10	#36400.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

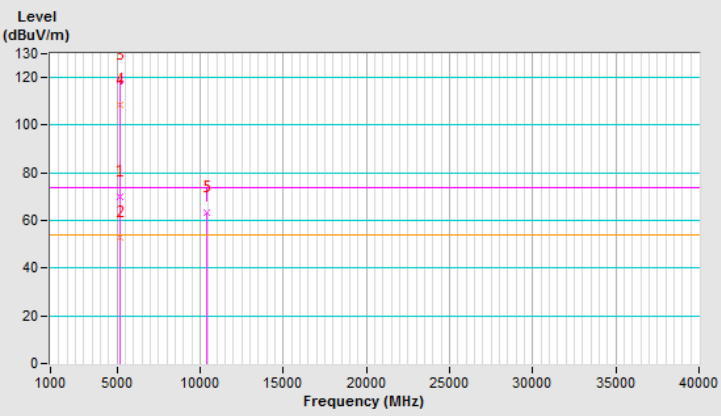


操 作 模 式 ：	發射	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 48：5240 MHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 07 月 06 日	測 試 者 ：	李哲銘

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5240.00	119.2 PK			1.05 H	331	78.0	41.2
2	*5240.00	108.7 AV			1.05 H	331	67.5	41.2
3	5350.00	64.5 PK	74.0	-9.5	1.08 H	325	52.1	12.4
4	5350.00	49.4 AV	54.0	-4.6	1.08 H	325	37.0	12.4
5	#10480.00	62.6 PK	68.2	-5.6	1.15 H	254	39.8	22.8
6	15720.00	-	-	-	-	-	-	-
7	20960.00	-	-	-	-	-	-	-
8	#26200.00	-	-	-	-	-	-	-
9	31440.00	-	-	-	-	-	-	-
10	#36680.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

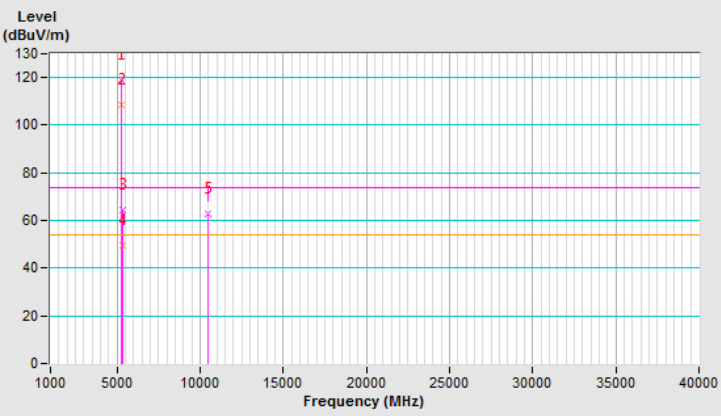


操 作 模 式 ：	發射	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 48：5240 MHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 07 月 06 日	測 試 者 ：	李哲銘

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5240.00	119.9 PK			1.12 V	10	78.7	41.2
2	*5240.00	109.4 AV			1.12 V	10	68.2	41.2
3	5350.00	65.3 PK	74.0	-8.7	1.04 V	15	52.9	12.4
4	5350.00	49.5 AV	54.0	-4.5	1.04 V	15	37.1	12.4
5	#10480.00	63.4 PK	68.2	-4.8	2.14 V	183	40.6	22.8
6	15720.00	-	-	-	-	-	-	-
7	20960.00	-	-	-	-	-	-	-
8	#26200.00	-	-	-	-	-	-	-
9	31440.00	-	-	-	-	-	-	-
10	#36680.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

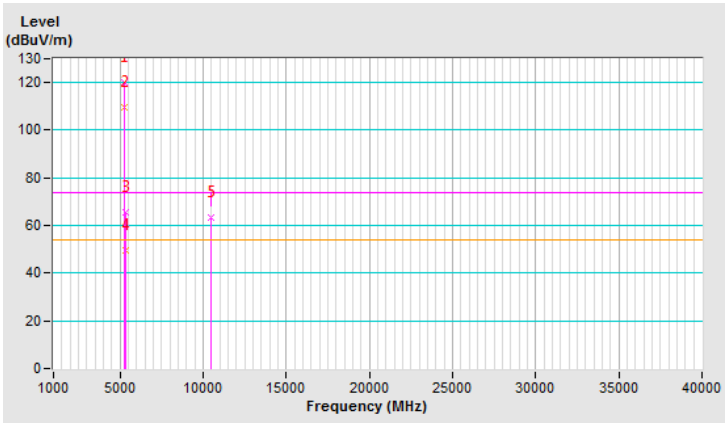


操 作 模 式 ：	發射	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 149：5745 MHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 07 月 08 日	測 試 者 ：	李哲銘

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5745.00	115.9 PK			1.00 H	41	73.4	42.5
2	*5745.00	105.8 AV			1.00 H	41	63.3	42.5
3	11490.00	64.3 PK	74.0	-9.7	2.25 H	182	40.2	24.1
4	11490.00	50.0 AV	54.0	-4.0	2.25 H	182	25.9	24.1
5	#17235.00	-	-	-	-	-	-	-
6	22980.00	-	-	-	-	-	-	-
7	#28725.00	-	-	-	-	-	-	-
8	#34470.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

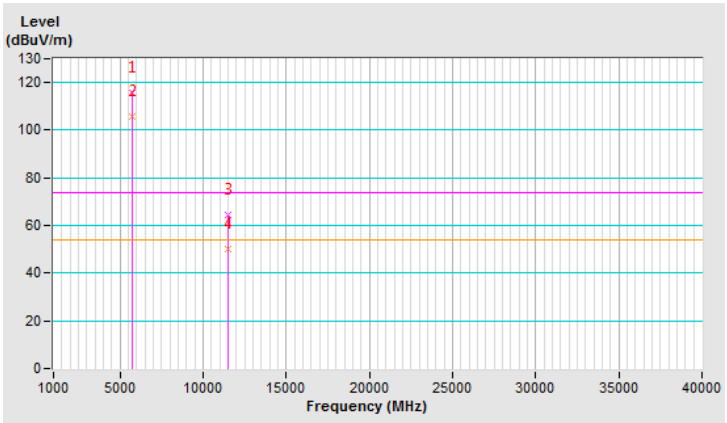


操 作 模 式 ：	發射	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 149：5745 MHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 07 月 08 日	測 試 者 ：	李哲銘

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5745.00	116.1 PK			1.00 V	26	73.6	42.5
2	*5745.00	106.6 AV			1.00 V	26	64.1	42.5
3	11490.00	64.7 PK	74.0	-9.3	1.38 V	201	40.6	24.1
4	11490.00	50.6 AV	54.0	-3.4	1.38 V	201	26.5	24.1
5	#17235.00	-	-	-	-	-	-	-
6	22980.00	-	-	-	-	-	-	-
7	#28725.00	-	-	-	-	-	-	-
8	#34470.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

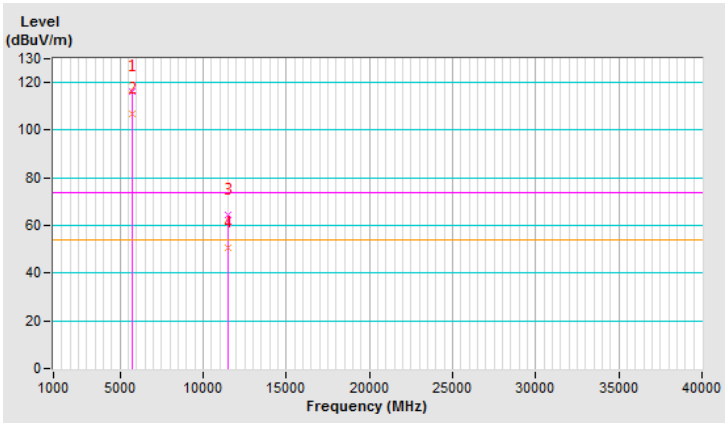


操 作 模 式 ：	發射	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 149：5745 MHz (OOBE)	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 07 月 08 日	測 試 者 ：	李哲銘

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5616.00	63.1 PK	68.2	-5.1	1.00 H	41	50.4	12.7
2	#5942.40	63.4 PK	68.2	-4.8	1.00 H	41	49.8	13.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

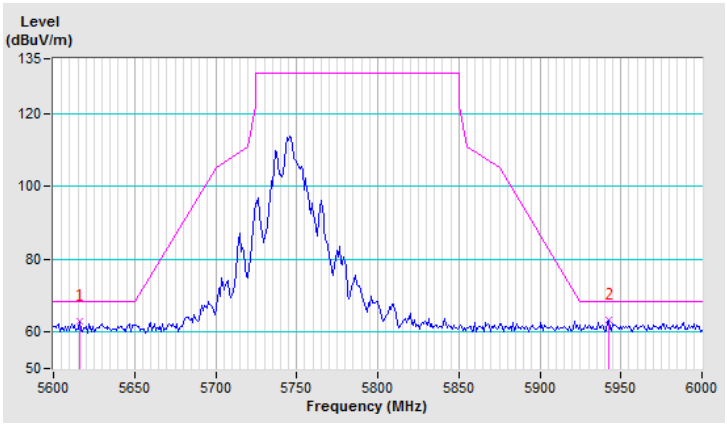


操 作 模 式 ：	發射	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 149：5745 MHz (OOBE)	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 07 月 08 日	測 試 者 ：	李哲銘

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5624.00	65.4 PK	68.2	-2.8	1.00 V	26	52.7	12.7
2	#5957.60	63.2 PK	68.2	-5.0	1.00 V	26	49.6	13.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

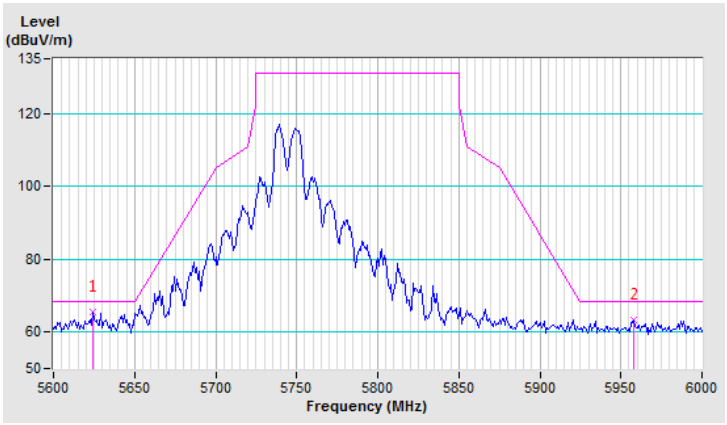


操 作 模 式 ：	發射	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 157：5785 MHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 07 月 08 日	測 試 者 ：	李哲銘

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5785.00	117.2 PK			1.00 H	43	74.6	42.6
2	*5785.00	107.0 AV			1.00 H	43	64.4	42.6
3	11570.00	64.4 PK	74.0	-9.6	2.25 H	196	40.4	24.0
4	11570.00	50.1 AV	54.0	-3.9	2.25 H	196	26.1	24.0
5	#17355.00	-	-	-	-	-	-	-
6	#23140.00	-	-	-	-	-	-	-
7	#28925.00	-	-	-	-	-	-	-
8	#34710.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

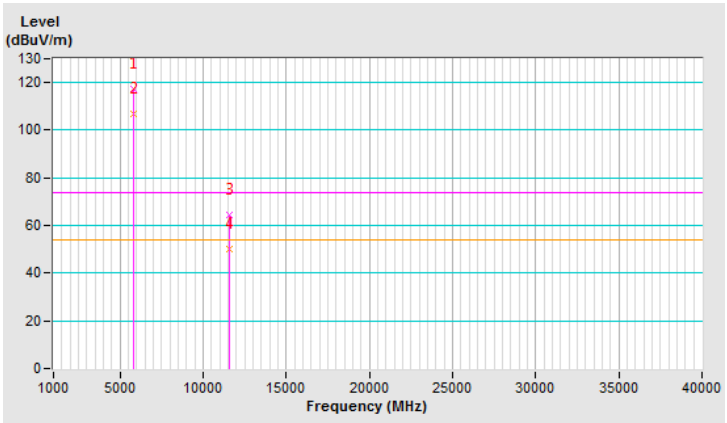


操 作 模 式 ：	發射	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 157：5785 MHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 07 月 08 日	測 試 者 ：	李哲銘

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5785.00	116.7 PK			1.00 V	30	74.1	42.6
2	*5785.00	106.8 AV			1.00 V	30	64.2	42.6
3	11570.00	64.5 PK	74.0	-9.5	1.98 V	224	40.5	24.0
4	11570.00	50.4 AV	54.0	-3.6	1.98 V	224	26.4	24.0
5	#17355.00	-	-	-	-	-	-	-
6	#23140.00	-	-	-	-	-	-	-
7	#28925.00	-	-	-	-	-	-	-
8	#34710.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

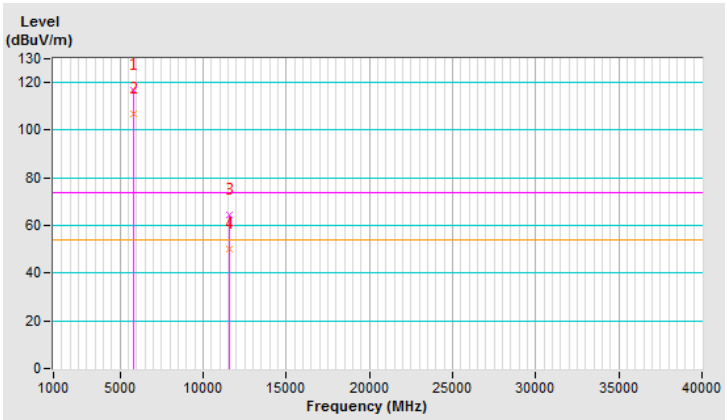


操 作 模 式 ：	發射	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 157：5785 MHz (OOBE)	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 07 月 08 日	測 試 者 ：	李哲銘

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5628.00	62.6 PK	68.2	-5.6	1.00 H	43	49.9	12.7
2	#5926.40	63.1 PK	68.2	-5.1	1.00 H	43	49.5	13.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

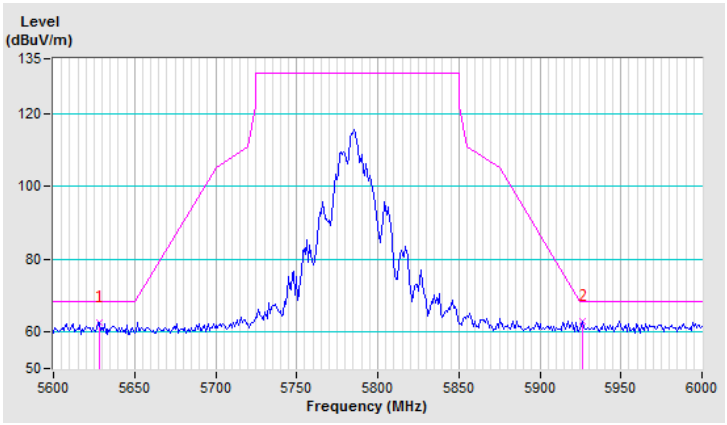


操 作 模 式 ：	發射	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 157：5785 MHz (OOBE)	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 07 月 08 日	測 試 者 ：	李哲銘

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5635.20	62.8 PK	68.2	-5.4	1.00 V	30	50.1	12.7
2	#5961.60	63.2 PK	68.2	-5.0	1.00 V	30	49.5	13.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

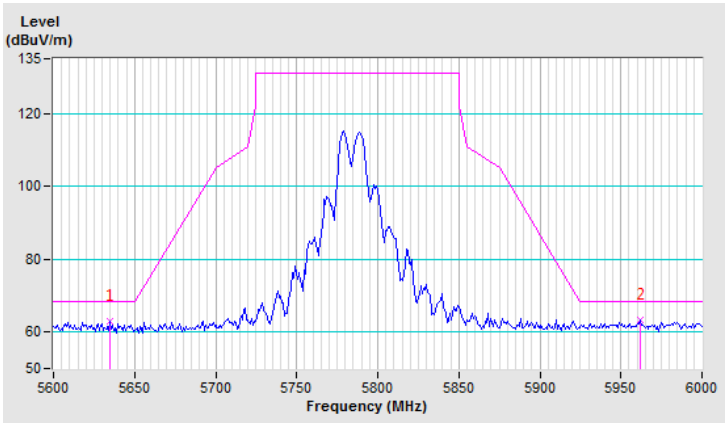


操 作 模 式 ：	發射	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 165：5825 MHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 07 月 08 日	測 試 者 ：	李哲銘

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5825.00	116.1 PK			1.00 H	44	73.5	42.6
2	*5825.00	106.0 AV			1.00 H	44	63.4	42.6
3	11650.00	63.6 PK	74.0	-10.4	1.68 H	273	40.0	23.6
4	11650.00	49.7 AV	54.0	-4.3	1.68 H	273	26.1	23.6
5	#17475.00	-	-	-	-	-	-	-
6	#23300.00	-	-	-	-	-	-	-
7	#29125.00	-	-	-	-	-	-	-
8	#34950.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

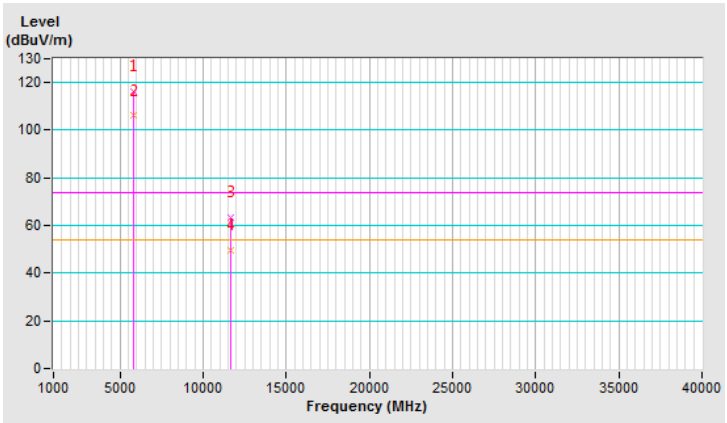


操 作 模 式 ：	發射	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 165：5825 MHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 07 月 08 日	測 試 者 ：	李哲銘

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5825.00	116.2 PK			1.00 V	31	73.6	42.6
2	*5825.00	106.4 AV			1.00 V	31	63.8	42.6
3	11650.00	64.1 PK	74.0	-9.9	1.57 V	210	40.5	23.6
4	11650.00	50.0 AV	54.0	-4.0	1.57 V	210	26.4	23.6
5	#17475.00	-	-	-	-	-	-	-
6	#23300.00	-	-	-	-	-	-	-
7	#29125.00	-	-	-	-	-	-	-
8	#34950.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

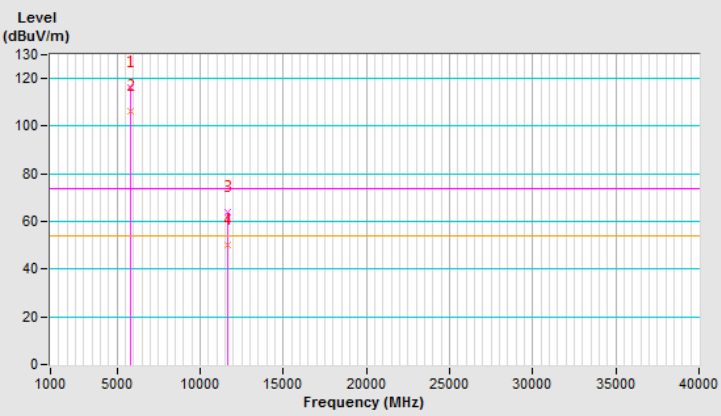


操 作 模 式 ：	發射	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 165：5825 MHz (OOBE)	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 07 月 08 日	測 試 者 ：	李哲銘

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5601.60	62.1 PK	68.2	-6.1	1.00 H	44	49.5	12.6
2	#5964.80	64.7 PK	68.2	-3.5	1.00 H	44	51.0	13.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

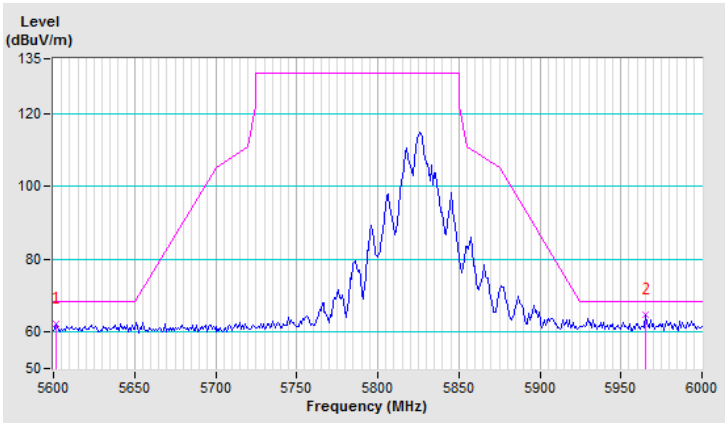


操 作 模 式 ：	發射	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 165：5825 MHz (OOBE)	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 07 月 08 日	測 試 者 ：	李哲銘

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5602.40	63.0 PK	68.2	-5.2	1.00 V	31	50.4	12.6
2	#5964.00	64.1 PK	68.2	-4.1	1.00 V	31	50.4	13.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

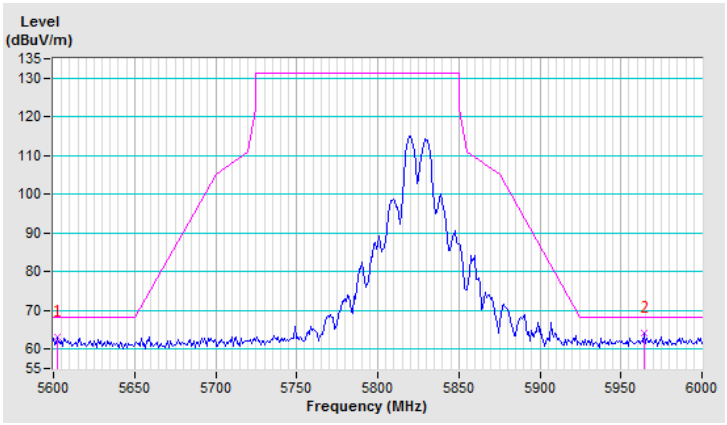


802.11ax (HE20)

操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA-MIMO
基 本 波 頻 率 ：	CH 36：5180 MHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 07 月 06 日	測 試 者 ：	李哲銘

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	71.2 PK	74.0	-2.8	1.17 H	314	58.6	12.6
2	5150.00	52.5 AV	54.0	-1.5	1.17 H	314	39.9	12.6
3	*5180.00	114.3 PK			1.08 H	341	72.8	41.5
4	*5180.00	101.1 AV			1.08 H	341	59.6	41.5
5	#10360.00	62.4 PK	68.2	-5.8	1.62 H	214	39.9	22.5
6	15540.00	-	-	-	-	-	-	-
7	20720.00	-	-	-	-	-	-	-
8	#25900.00	-	-	-	-	-	-	-
9	#31080.00	-	-	-	-	-	-	-
10	#36260.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

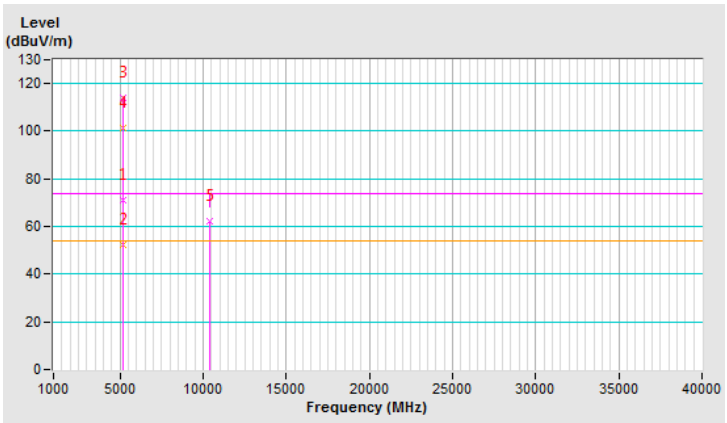


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA-MIMO
基 本 波 頻 率 ：	CH 36：5180 MHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 07 月 06 日	測 試 者 ：	李哲銘

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	72.0 PK	74.0	-2.0	1.13 V	7	59.4	12.6
2	5150.00	52.8 AV	54.0	-1.2	1.13 V	7	40.2	12.6
3	*5180.00	114.8 PK			1.18 V	8	73.3	41.5
4	*5180.00	101.9 AV			1.18 V	8	60.4	41.5
5	#10360.00	62.7 PK	68.2	-5.5	2.16 V	225	40.2	22.5
6	15540.00	-	-	-	-	-	-	-
7	20720.00	-	-	-	-	-	-	-
8	#25900.00	-	-	-	-	-	-	-
9	#31080.00	-	-	-	-	-	-	-
10	#36260.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

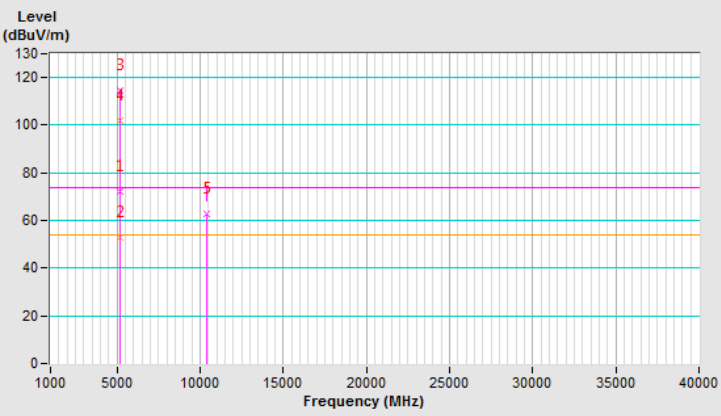


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA-MIMO
基 本 波 頻 率 ：	CH 40：5200 MHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 07 月 06 日	測 試 者 ：	李哲銘

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	66.1 PK	74.0	-7.9	1.09 H	336	53.5	12.6
2	5150.00	52.3 AV	54.0	-1.7	1.09 H	336	39.7	12.6
3	*5200.00	117.6 PK			1.10 H	327	76.1	41.5
4	*5200.00	106.0 AV			1.10 H	327	64.5	41.5
5	#10400.00	62.6 PK	68.2	-5.6	2.99 H	174	39.7	22.9
6	15600.00	-	-	-	-	-	-	-
7	20800.00	-	-	-	-	-	-	-
8	#26000.00	-	-	-	-	-	-	-
9	31200.00	-	-	-	-	-	-	-
10	#36400.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

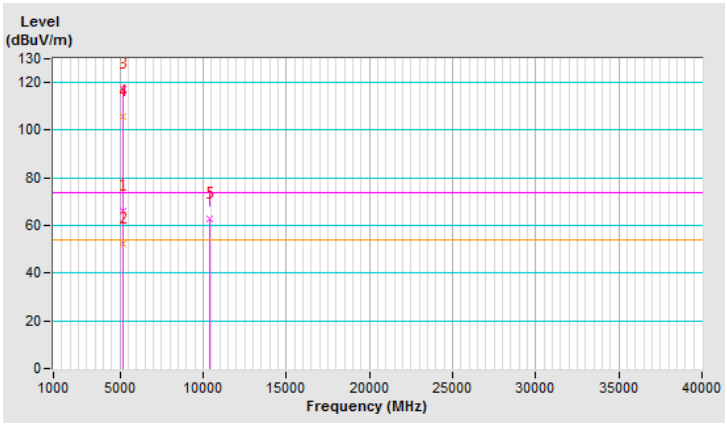


操作模式：	發射	調變技術：	OFDMA-MIMO
基本波頻率：	CH 40：5200 MHz	測試儀器：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量測場地溫度：	25℃	量測場地濕度：	70%RH
測試日期：	108 年 07 月 06 日	測試者：	李哲銘

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	66.8 PK	74.0	-7.2	1.14 V	9	54.2	12.6
2	5150.00	52.6 AV	54.0	-1.4	1.14 V	9	40.0	12.6
3	*5200.00	118.3 PK			1.02 V	9	76.8	41.5
4	*5200.00	106.7 AV			1.02 V	9	65.2	41.5
5	#10400.00	63.0 PK	68.2	-5.2	1.65 V	207	40.1	22.9
6	15600.00	-	-	-	-	-	-	-
7	20800.00	-	-	-	-	-	-	-
8	#26000.00	-	-	-	-	-	-	-
9	31200.00	-	-	-	-	-	-	-
10	#36400.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

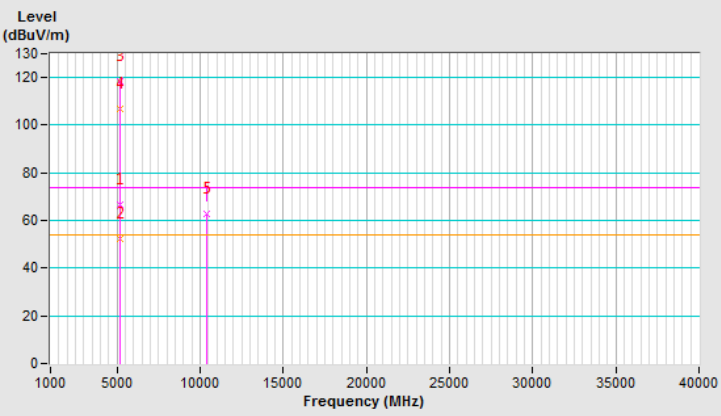


操作模式：	發射	調變技術：	OFDMA-MIMO
基本波頻率：	CH 48：5240 MHz	測試儀器：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量測場地溫度：	25℃	量測場地濕度：	70%RH
測試日期：	108 年 07 月 06 日	測試者：	李哲銘

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5240.00	117.5 PK			1.12 H	336	76.3	41.2
2	*5240.00	106.3 AV			1.12 H	336	65.1	41.2
3	5350.00	60.8 PK	74.0	-13.2	1.01 H	330	48.4	12.4
4	5350.00	48.0 AV	54.0	-6.0	1.01 H	330	35.6	12.4
5	#10480.00	62.7 PK	68.2	-5.5	2.64 H	195	39.9	22.8
6	15720.00	-	-	-	-	-	-	-
7	20960.00	-	-	-	-	-	-	-
8	#26200.00	-	-	-	-	-	-	-
9	31440.00	-	-	-	-	-	-	-
10	#36680.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

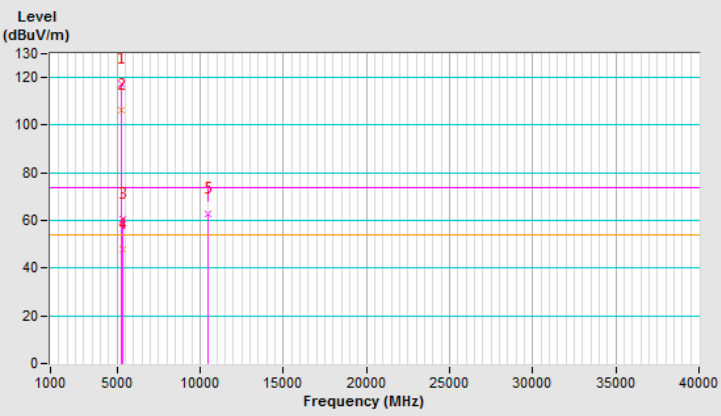


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA-MIMO
基 本 波 頻 率 ：	CH 48：5240 MHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 07 月 06 日	測 試 者 ：	李哲銘

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5240.00	118.4 PK			1.00 V	9	77.2	41.2
2	*5240.00	107.0 AV			1.00 V	9	65.8	41.2
3	5350.00	61.1 PK	74.0	-12.9	1.05 V	14	48.7	12.4
4	5350.00	48.3 AV	54.0	-5.7	1.05 V	14	35.9	12.4
5	#10480.00	63.5 PK	68.2	-4.7	2.10 V	164	40.7	22.8
6	15720.00	-	-	-	-	-	-	-
7	20960.00	-	-	-	-	-	-	-
8	#26200.00	-	-	-	-	-	-	-
9	31440.00	-	-	-	-	-	-	-
10	#36680.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

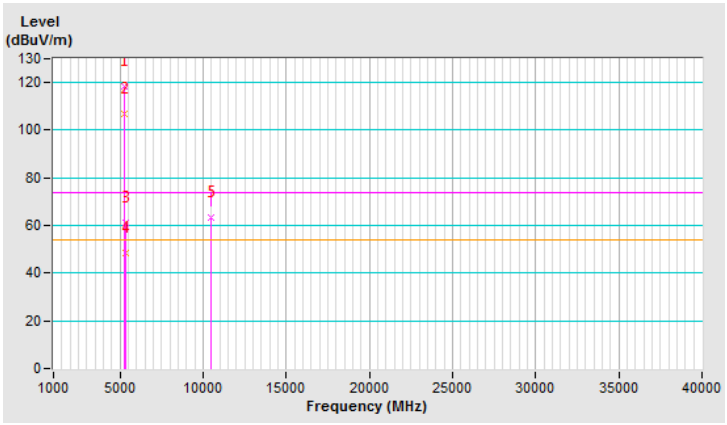


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA-MIMO
基 本 波 頻 率 ：	CH 149：5745 MHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 07 月 08 日	測 試 者 ：	李哲銘

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5745.00	115.6 PK			1.00 H	37	73.1	42.5
2	*5745.00	103.9 AV			1.00 H	37	61.4	42.5
3	11490.00	64.1 PK	74.0	-9.9	1.68 H	222	40.0	24.1
4	11490.00	49.9 AV	54.0	-4.1	1.68 H	222	25.8	24.1
5	#17235.00	-	-	-	-	-	-	-
6	22980.00	-	-	-	-	-	-	-
7	#28725.00	-	-	-	-	-	-	-
8	#34470.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

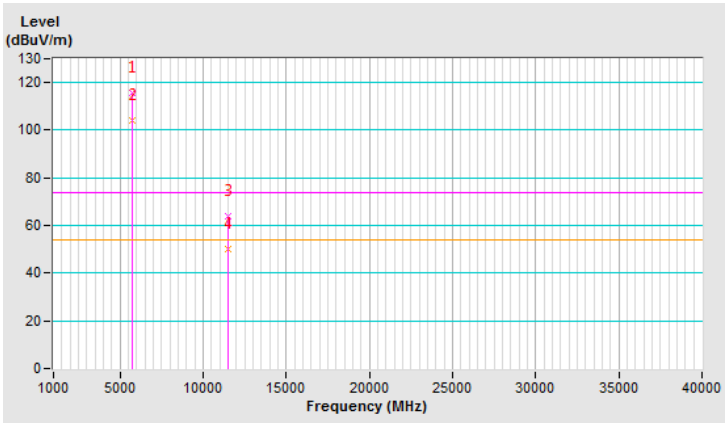


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA-MIMO
基 本 波 頻 率 ：	CH 149：5745 MHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 07 月 08 日	測 試 者 ：	李哲銘

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5745.00	116.1 PK			1.00 V	32	73.6	42.5
2	*5745.00	104.9 AV			1.00 V	32	62.4	42.5
3	11490.00	64.3 PK	74.0	-9.7	1.99 V	246	40.2	24.1
4	11490.00	50.6 AV	54.0	-3.4	1.99 V	246	26.5	24.1
5	#17235.00	-	-	-	-	-	-	-
6	22980.00	-	-	-	-	-	-	-
7	#28725.00	-	-	-	-	-	-	-
8	#34470.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

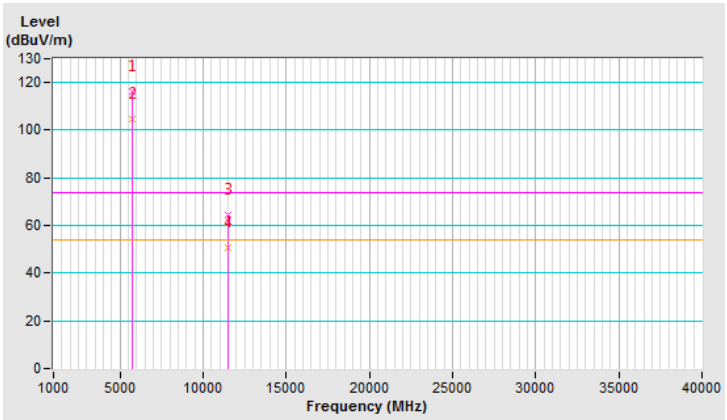


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA-MIMO
基 本 波 頻 率 ：	CH 149：5745 MHz (OOBE)	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 07 月 08 日	測 試 者 ：	李哲銘

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5636.00	63.1 PK	68.2	-5.1	1.00 H	37	50.4	12.7
2	#5981.60	63.8 PK	68.2	-4.4	1.00 H	37	50.0	13.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

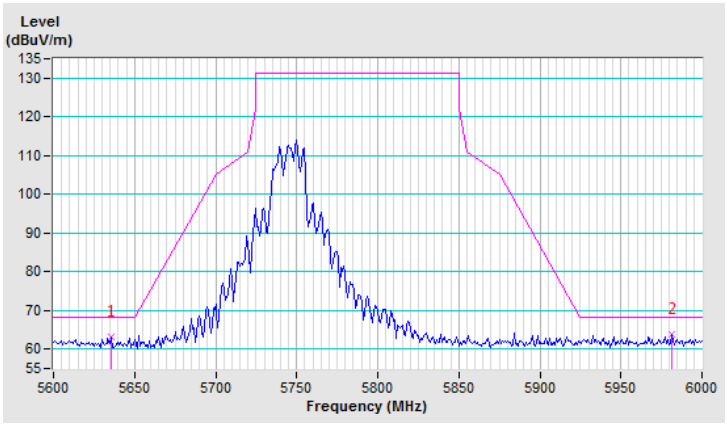


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA-MIMO
基 本 波 頻 率 ：	CH 149：5745 MHz (OOBE)	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 07 月 08 日	測 試 者 ：	李哲銘

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5628.80	62.5 PK	68.2	-5.7	1.00 V	32	49.8	12.7
2	#5992.80	63.6 PK	68.2	-4.6	1.00 V	32	49.8	13.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

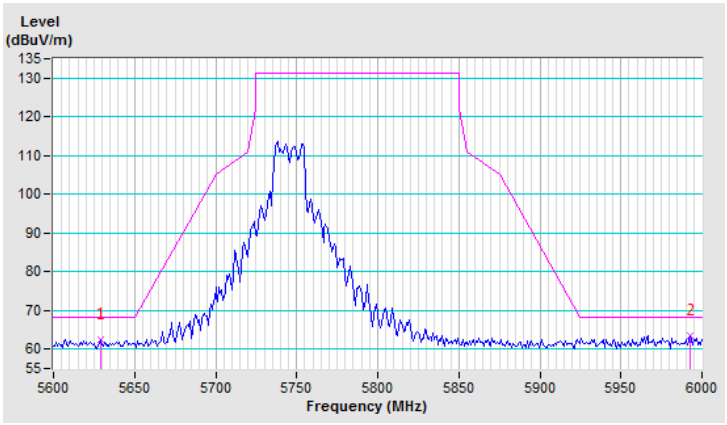


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA-MIMO
基 本 波 頻 率 ：	CH 157：5785 MHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 07 月 08 日	測 試 者 ：	李哲銘

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5785.00	117.4 PK			1.00 H	35	74.8	42.6
2	*5785.00	105.8 AV			1.00 H	35	63.2	42.6
3	11570.00	63.7 PK	74.0	-10.3	1.63 H	225	39.7	24.0
4	11570.00	50.0 AV	54.0	-4.0	1.63 H	225	26.0	24.0
5	#17355.00	-	-	-	-	-	-	-
6	#23140.00	-	-	-	-	-	-	-
7	#28925.00	-	-	-	-	-	-	-
8	#34710.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

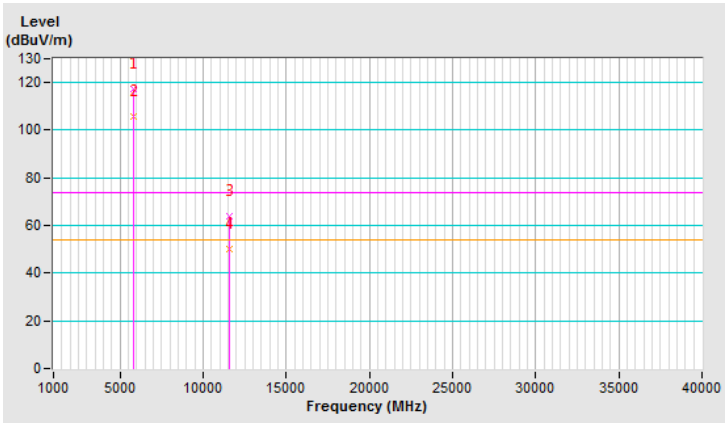


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA-MIMO
基 本 波 頻 率 ：	CH 157：5785 MHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 07 月 08 日	測 試 者 ：	李哲銘

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5785.00	118.0 PK			1.00 V	36	75.4	42.6
2	*5785.00	106.2 AV			1.00 V	36	63.6	42.6
3	11570.00	64.4 PK	74.0	-9.6	1.63 V	289	40.4	24.0
4	11570.00	50.1 AV	54.0	-3.9	1.63 V	289	26.1	24.0
5	#17355.00	-	-	-	-	-	-	-
6	#23140.00	-	-	-	-	-	-	-
7	#28925.00	-	-	-	-	-	-	-
8	#34710.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

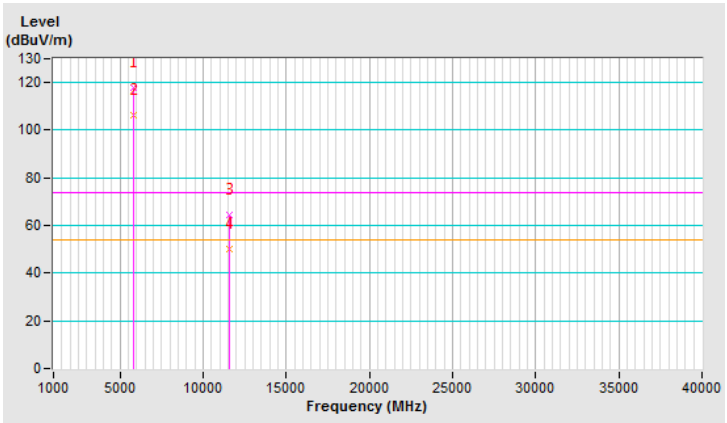


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA-MIMO
基 本 波 頻 率 ：	CH 157：5785 MHz (OOBE)	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 07 月 08 日	測 試 者 ：	李哲銘

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5637.60	63.7 PK	68.2	-4.5	1.00 H	35	51.0	12.7
2	#5960.00	63.3 PK	68.2	-4.9	1.00 H	35	49.6	13.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

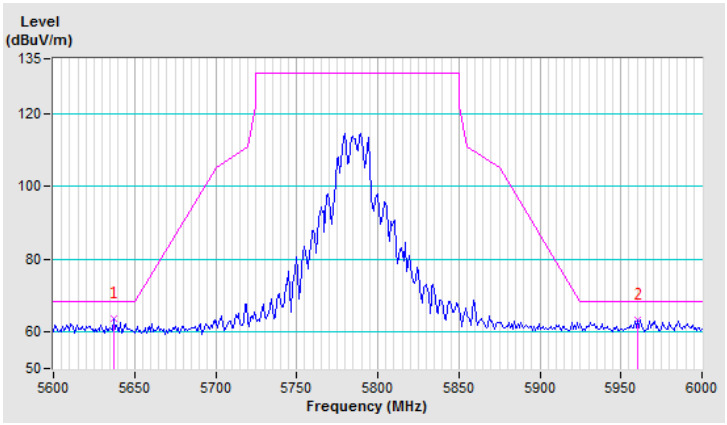


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA-MIMO
基 本 波 頻 率 ：	CH 157：5785 MHz (OOBE)	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 07 月 08 日	測 試 者 ：	李哲銘

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5633.60	62.4 PK	68.2	-5.8	1.00 V	36	49.7	12.7
2	#5928.80	63.1 PK	68.2	-5.1	1.00 V	36	49.5	13.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

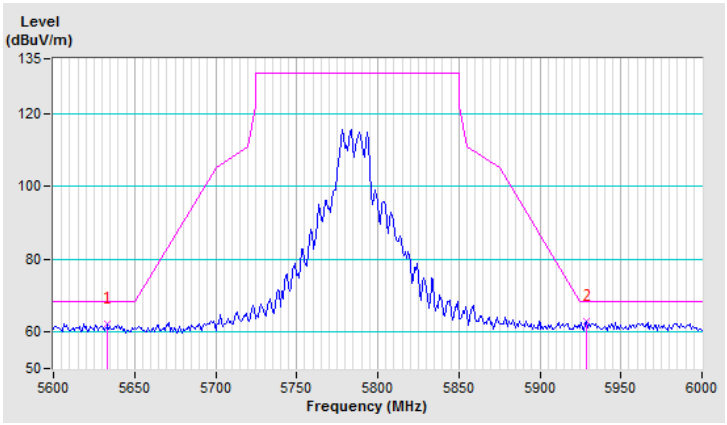


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA-MIMO
基 本 波 頻 率 ：	CH 165：5825 MHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 07 月 08 日	測 試 者 ：	李哲銘

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5825.00	115.4 PK			1.00 H	40	72.8	42.6
2	*5825.00	103.8 AV			1.00 H	40	61.2	42.6
3	11650.00	63.3 PK	74.0	-10.7	1.95 H	102	39.7	23.6
4	11650.00	49.4 AV	54.0	-4.6	1.95 H	102	25.8	23.6
5	#17475.00	-	-	-	-	-	-	-
6	#23300.00	-	-	-	-	-	-	-
7	#29125.00	-	-	-	-	-	-	-
8	#34950.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

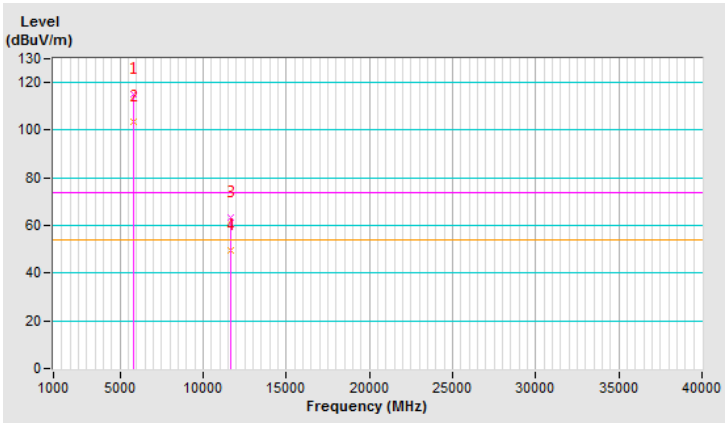


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA-MIMO
基 本 波 頻 率 ：	CH 165：5825 MHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 07 月 08 日	測 試 者 ：	李哲銘

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5825.00	116.0 PK			1.00 V	38	73.4	42.6
2	*5825.00	104.3 AV			1.00 V	38	61.7	42.6
3	11650.00	64.1 PK	74.0	-9.9	1.72 V	270	40.5	23.6
4	11650.00	49.9 AV	54.0	-4.1	1.72 V	270	26.3	23.6
5	#17475.00	-	-	-	-	-	-	-
6	#23300.00	-	-	-	-	-	-	-
7	#29125.00	-	-	-	-	-	-	-
8	#34950.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

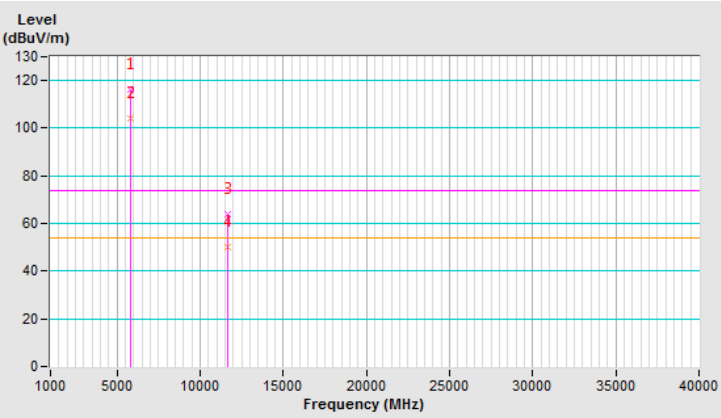


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA-MIMO
基 本 波 頻 率 ：	CH 165：5825 MHz (OOBE)	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 07 月 08 日	測 試 者 ：	李哲銘

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5646.40	62.6 PK	68.2	-5.6	1.00 H	40	50.0	12.6
2	#5948.00	63.2 PK	68.2	-5.0	1.00 H	40	49.6	13.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

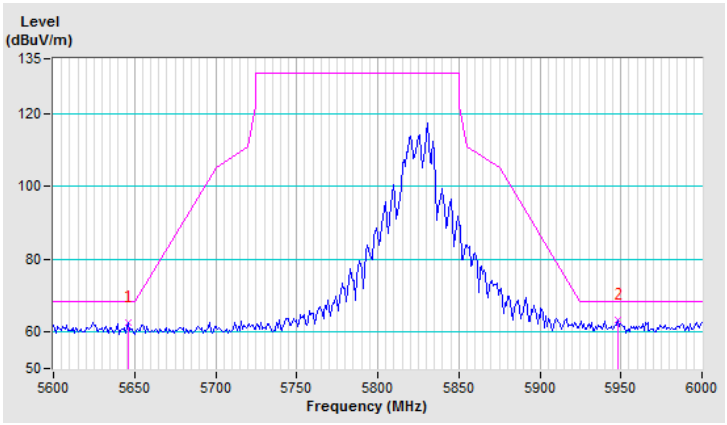


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA-MIMO
基 本 波 頻 率 ：	CH 165：5825 MHz (OOBE)	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 07 月 08 日	測 試 者 ：	李哲銘

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5614.40	62.5 PK	68.2	-5.7	1.00 V	38	49.8	12.7
2	#5959.20	62.7 PK	68.2	-5.5	1.00 V	38	49.1	13.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

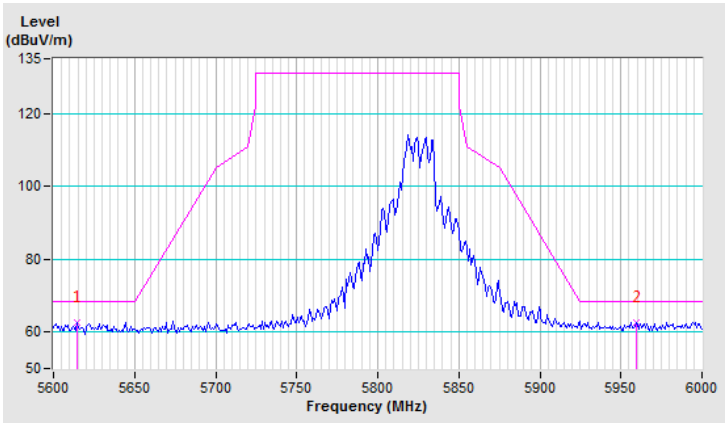


802.11ax (HE40)

操作模式：	發射	調變技術：	OFDMA-MIMO
基本波頻率：	CH 38：5190 MHz	測試儀器：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=3kHz
量測場地溫度：	25℃	量測場地濕度：	70%RH
測試日期：	108 年 07 月 06 日	測試者：	李哲銘

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	72.3 PK	74.0	-1.7	1.04 H	334	59.7	12.6
2	5150.00	52.6 AV	54.0	-1.4	1.04 H	334	40.0	12.6
3	*5190.00	107.7 PK			1.09 H	340	66.2	41.5
4	*5190.00	96.8 AV			1.09 H	340	55.3	41.5
5	#10380.00	62.8 PK	68.2	-5.4	1.95 H	284	40.1	22.7
6	15570.00	-	-	-	-	-	-	-
7	20760.00	-	-	-	-	-	-	-
8	#25950.00	-	-	-	-	-	-	-
9	#31140.00	-	-	-	-	-	-	-
10	#36330.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

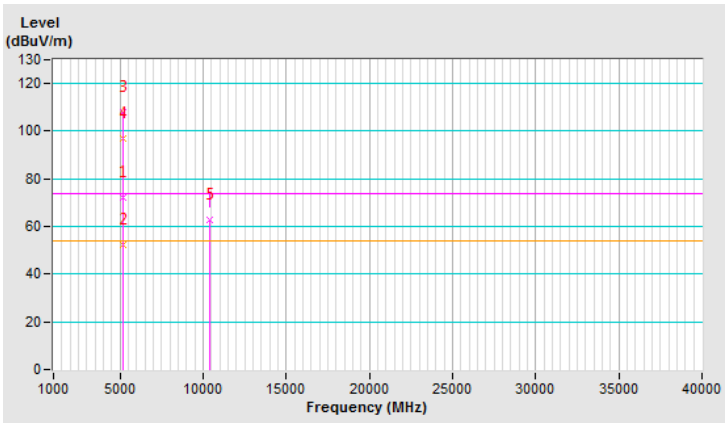


操作模式：	發射	調變技術：	OFDMA-MIMO
基本波頻率：	CH 38：5190 MHz	測試儀器：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=3kHz
量測場地溫度：	25℃	量測場地濕度：	70%RH
測試日期：	108 年 07 月 06 日	測試者：	李哲銘

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	72.9 PK	74.0	-1.1	1.10 V	2	60.3	12.6
2	5150.00	53.0 AV	54.0	-1.0	1.10 V	2	40.4	12.6
3	*5190.00	108.4 PK			1.10 V	1	66.9	41.5
4	*5190.00	97.5 AV			1.10 V	1	56.0	41.5
5	#10380.00	63.2 PK	68.2	-5.0	2.29 V	176	40.5	22.7
6	15570.00	-	-	-	-	-	-	-
7	20760.00	-	-	-	-	-	-	-
8	#25950.00	-	-	-	-	-	-	-
9	#31140.00	-	-	-	-	-	-	-
10	#36330.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

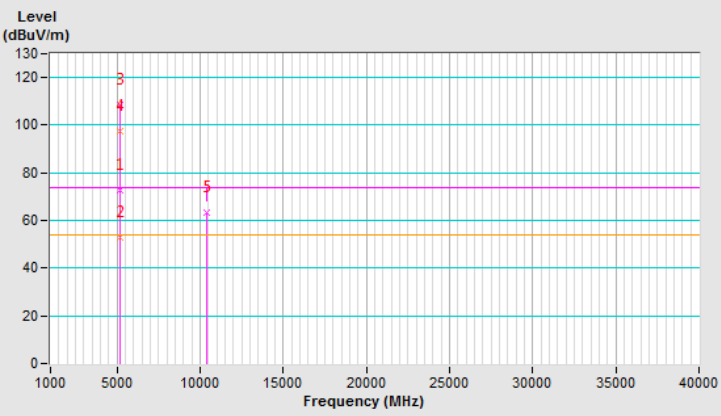


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA-MIMO
基 本 波 頻 率 ：	CH 46：5230 MHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=3kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 07 月 06 日	測 試 者 ：	李哲銘

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	67.1 PK	74.0	-6.9	1.15 H	327	54.5	12.6
2	5150.00	52.6 AV	54.0	-1.4	1.15 H	327	40.0	12.6
3	*5230.00	113.3 PK			1.13 H	326	72.0	41.3
4	*5230.00	101.4 AV			1.13 H	326	60.1	41.3
5	5350.00	60.5 PK	74.0	-13.5	1.01 H	331	48.1	12.4
6	5350.00	47.3 AV	54.0	-6.7	1.01 H	331	34.9	12.4
7	#10460.00	62.6 PK	68.2	-5.6	2.68 H	115	39.7	22.9
8	15690.00	-	-	-	-	-	-	-
9	20920.00	-	-	-	-	-	-	-
10	#26150.00	-	-	-	-	-	-	-
11	31380.00	-	-	-	-	-	-	-
12	#36610.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

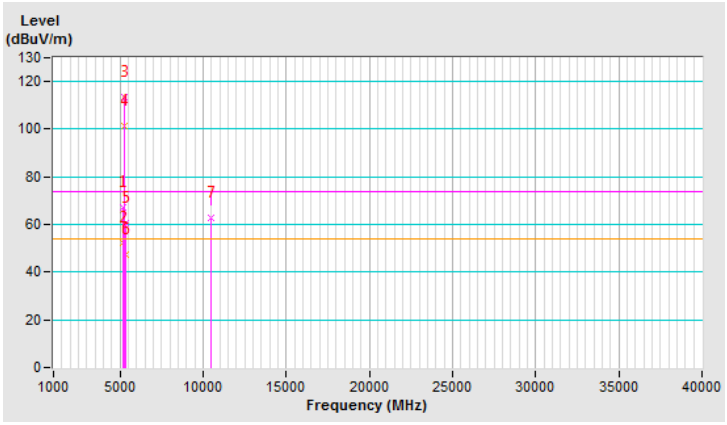


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA-MIMO
基 本 波 頻 率 ：	CH 46：5230 MHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=3kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 07 月 06 日	測 試 者 ：	李哲銘

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	67.5 PK	74.0	-6.5	1.00 V	359	54.9	12.6
2	5150.00	52.9 AV	54.0	-1.1	1.00 V	359	40.3	12.6
3	*5230.00	113.9 PK			1.01 V	9	72.6	41.3
4	*5230.00	102.0 AV			1.01 V	9	60.7	41.3
5	5350.00	61.0 PK	74.0	-13.0	1.05 V	12	48.6	12.4
6	5350.00	47.8 AV	54.0	-6.2	1.05 V	12	35.4	12.4
7	#10460.00	63.4 PK	68.2	-4.8	1.69 V	278	40.5	22.9
8	15690.00	-	-	-	-	-	-	-
9	20920.00	-	-	-	-	-	-	-
10	#26150.00	-	-	-	-	-	-	-
11	31380.00	-	-	-	-	-	-	-
12	#36610.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

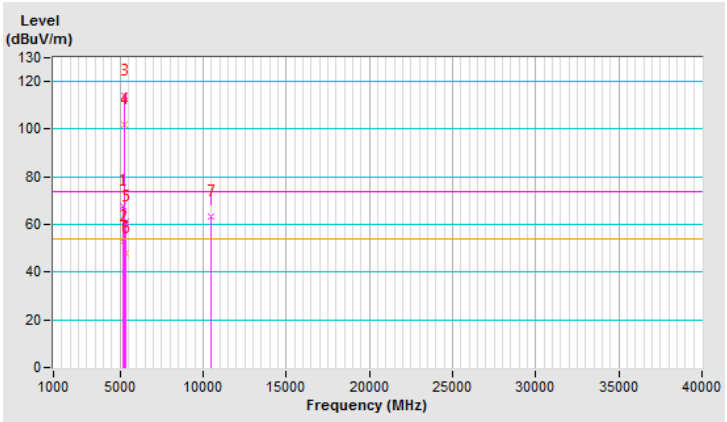


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA-MIMO
基 本 波 頻 率 ：	CH 151：5755 MHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=3kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 07 月 08 日	測 試 者 ：	李哲銘

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5755.00	114.0 PK			1.00 H	36	71.5	42.5
2	*5755.00	102.0 AV			1.00 H	36	59.5	42.5
3	11510.00	63.5 PK	74.0	-10.5	2.91 H	150	39.6	23.9
4	11510.00	49.8 AV	54.0	-4.2	2.91 H	150	25.9	23.9
5	#17265.00	-	-	-	-	-	-	-
6	23020.00	-	-	-	-	-	-	-
7	#28775.00	-	-	-	-	-	-	-
8	#34530.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

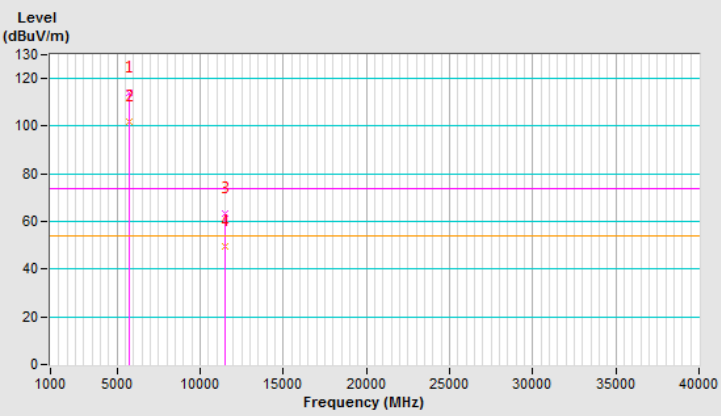


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA-MIMO
基 本 波 頻 率 ：	CH 151：5755 MHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=3kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 07 月 08 日	測 試 者 ：	李哲銘

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5755.00	114.5 PK			2.61 V	36	72.0	42.5
2	*5755.00	102.4 AV			2.61 V	36	59.9	42.5
3	11510.00	64.3 PK	74.0	-9.7	1.69 V	225	40.4	23.9
4	11510.00	50.2 AV	54.0	-3.8	1.69 V	225	26.3	23.9
5	#17265.00	-	-	-	-	-	-	-
6	23020.00	-	-	-	-	-	-	-
7	#28775.00	-	-	-	-	-	-	-
8	#34530.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

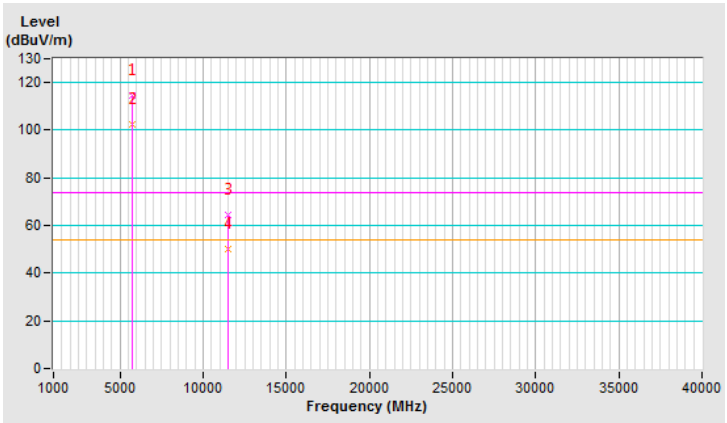


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA-MIMO
基 本 波 頻 率 ：	CH 151：5755 MHz (OOBE)	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=3kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 07 月 08 日	測 試 者 ：	李哲銘

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5649.60	65.9 PK	68.2	-2.3	1.00 H	36	53.3	12.6
2	#5962.40	62.2 PK	68.2	-6.0	1.00 H	36	48.5	13.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

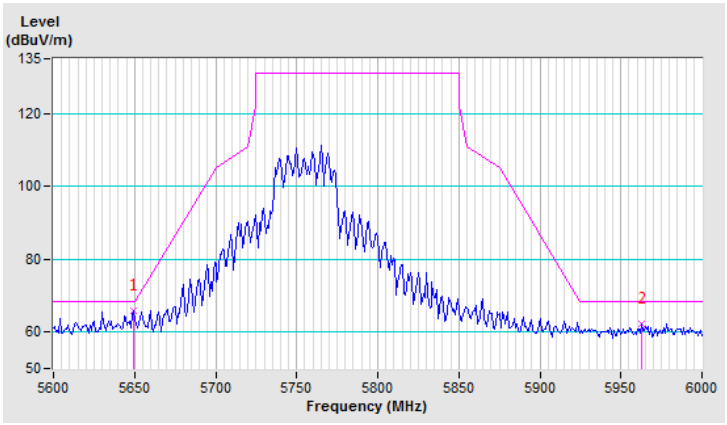


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA-MIMO
基 本 波 頻 率 ：	CH 151：5755 MHz (OOBE)	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=3kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 07 月 08 日	測 試 者 ：	李哲銘

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5644.80	65.1 PK	68.2	-3.1	2.61 V	36	52.4	12.7
2	#5963.20	63.7 PK	68.2	-4.5	2.61 V	36	50.0	13.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

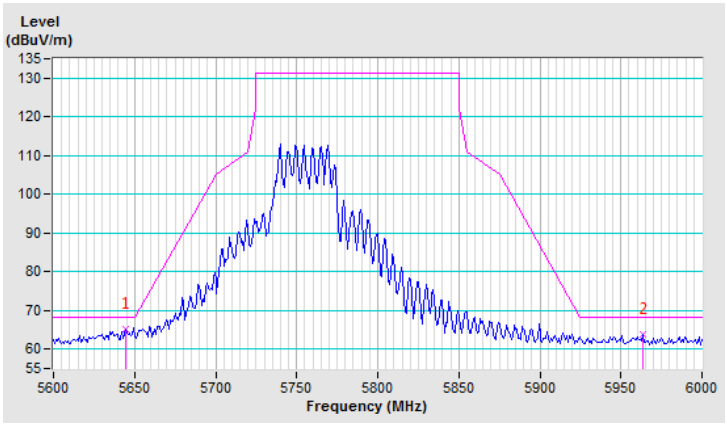


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA-MIMO
基 本 波 頻 率 ：	CH 159：5795 MHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=3kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 07 月 08 日	測 試 者 ：	李哲銘

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5795.00	115.1 PK			1.00 H	36	72.5	42.6
2	*5795.00	101.5 AV			1.00 H	36	58.9	42.6
3	11590.00	63.2 PK	74.0	-10.8	1.97 H	236	39.4	23.8
4	11590.00	49.9 AV	54.0	-4.1	1.97 H	236	26.1	23.8
5	#17385.00	-	-	-	-	-	-	-
6	#23180.00	-	-	-	-	-	-	-
7	#28975.00	-	-	-	-	-	-	-
8	#34770.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

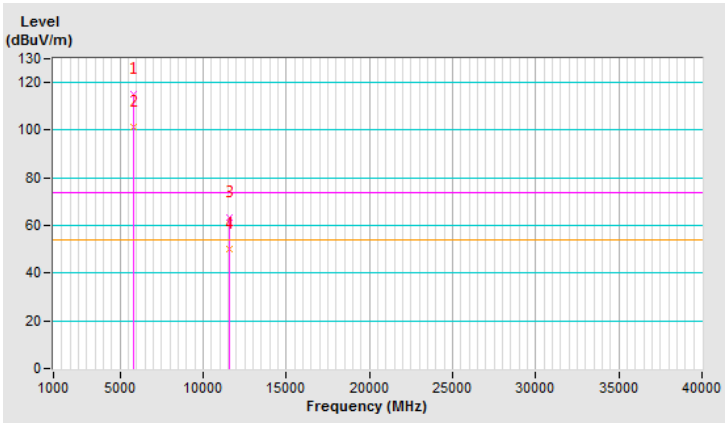


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA-MIMO
基 本 波 頻 率 ：	CH 159：5795 MHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=3kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 07 月 08 日	測 試 者 ：	李哲銘

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5795.00	115.7 PK			2.61 V	48	73.1	42.6
2	*5795.00	104.0 AV			2.61 V	48	61.4	42.6
3	11590.00	64.2 PK	74.0	-9.8	1.62 V	245	40.4	23.8
4	11590.00	50.3 AV	54.0	-3.7	1.62 V	245	26.5	23.8
5	#17385.00	-	-	-	-	-	-	-
6	#23180.00	-	-	-	-	-	-	-
7	#28975.00	-	-	-	-	-	-	-
8	#34770.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

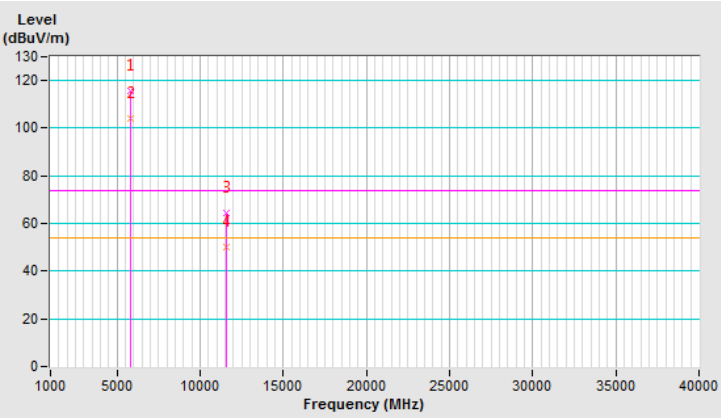


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA-MIMO
基 本 波 頻 率 ：	CH 159：5795 MHz (OOBE)	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=3kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 07 月 08 日	測 試 者 ：	李哲銘

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5638.40	63.1 PK	68.2	-5.1	1.00 H	36	50.4	12.7
2	#5924.80	67.2 PK	68.3	-1.1	1.00 H	36	53.6	13.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

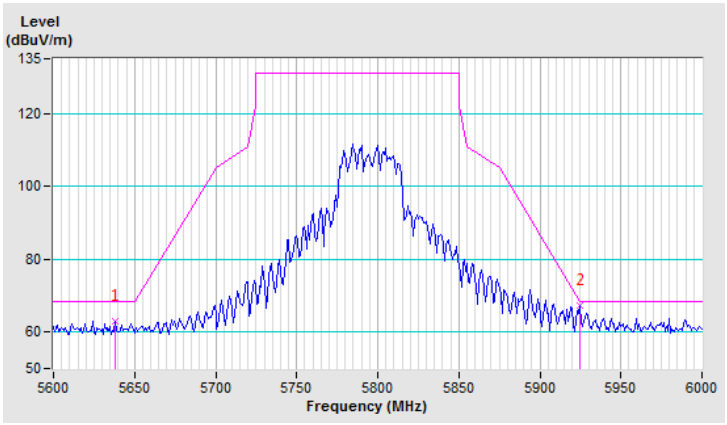


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA-MIMO
基 本 波 頻 率 ：	CH 159：5795 MHz (OOBE)	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=3kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 07 月 08 日	測 試 者 ：	李哲銘

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5616.00	63.1 PK	68.2	-5.1	2.61 V	48	50.4	12.7
2	#5924.00	65.2 PK	68.9	-3.7	2.61 V	48	51.6	13.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

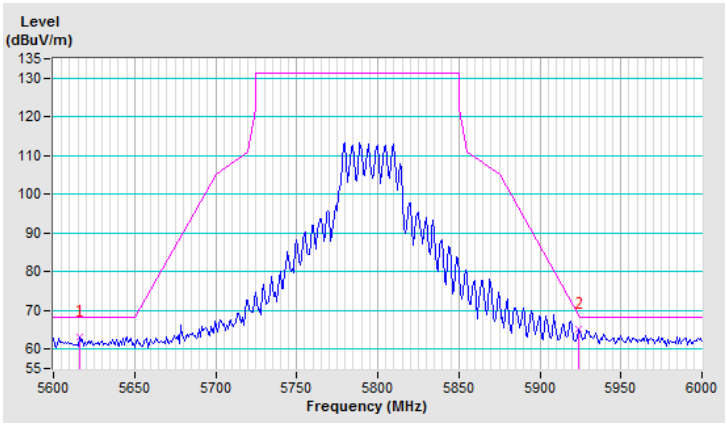


802.11ax (HE80)

操作模式：	發射	調變技術：	OFDMA-MIMO
基本波頻率：	CH 42：5210 MHz	測試儀器：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=3kHz
量測場地溫度：	25℃	量測場地濕度：	70%RH
測試日期：	108 年 07 月 06 日	測試者：	李哲銘

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	71.0 PK	74.0	-3.0	1.10 H	345	58.4	12.6
2	5150.00	52.6 AV	54.0	-1.4	1.10 H	345	40.0	12.6
3	*5210.00	106.9 PK			1.05 H	336	65.5	41.4
4	*5210.00	94.2 AV			1.05 H	336	52.8	41.4
5	5350.00	60.5 PK	74.0	-13.5	1.07 H	336	48.1	12.4
6	5350.00	47.4 AV	54.0	-6.6	1.07 H	336	35.0	12.4
7	#10420.00	62.6 PK	68.2	-5.6	2.36 H	225	39.8	22.8
8	15630.00	-	-	-	-	-	-	-
9	20840.00	-	-	-	-	-	-	-
10	#26050.00	-	-	-	-	-	-	-
11	31260.00	-	-	-	-	-	-	-
12	36470.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

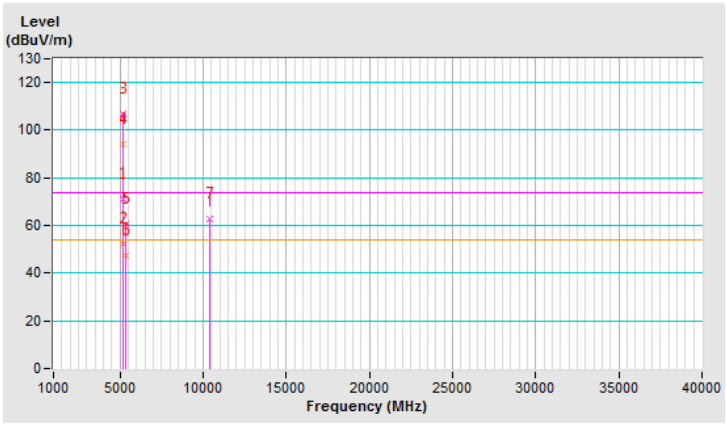


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA-MIMO
基 本 波 頻 率 ：	CH 42：5210 MHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=3kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 07 月 06 日	測 試 者 ：	李哲銘

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	71.7 PK	74.0	-2.3	1.00 V	3	59.1	12.6
2	5150.00	53.0 AV	54.0	-1.0	1.00 V	3	40.4	12.6
3	*5210.00	107.5 PK			1.04 V	5	66.1	41.4
4	*5210.00	94.7 AV			1.04 V	5	53.3	41.4
5	5350.00	61.0 PK	74.0	-13.0	1.02 V	10	48.6	12.4
6	5350.00	48.0 AV	54.0	-6.0	1.02 V	10	35.6	12.4
7	#10420.00	63.1 PK	68.2	-5.1	1.62 V	241	40.3	22.8
8	15630.00	-	-	-	-	-	-	-
9	20840.00	-	-	-	-	-	-	-
10	#26050.00	-	-	-	-	-	-	-
11	31260.00	-	-	-	-	-	-	-
12	36470.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

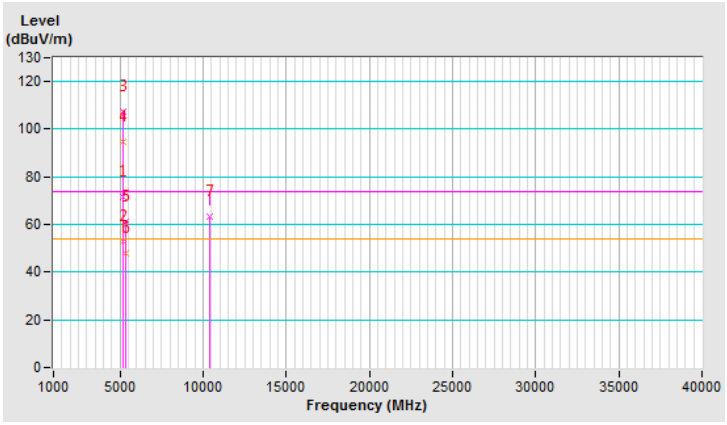


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA-MIMO
基 本 波 頻 率 ：	CH 155：5775 MHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=3kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 07 月 08 日	測 試 者 ：	李哲銘

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5775.00	109.7 PK			1.00 H	40	67.1	42.6
2	*5775.00	97.2 AV			1.00 H	40	54.6	42.6
3	11550.00	63.4 PK	74.0	-10.6	2.90 H	185	39.5	23.9
4	11550.00	50.0 AV	54.0	-4.0	2.90 H	185	26.1	23.9
5	#17325.00	-	-	-	-	-	-	-
6	23100.00	-	-	-	-	-	-	-
7	#28875.00	-	-	-	-	-	-	-
8	#34650.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

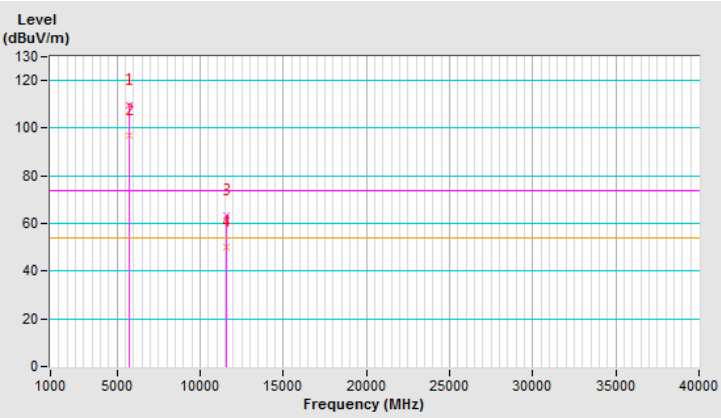


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA-MIMO
基 本 波 頻 率 ：	CH 155：5775 MHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=3kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 07 月 08 日	測 試 者 ：	李哲銘

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5775.00	110.3 PK			2.64 V	38	67.7	42.6
2	*5775.00	97.8 AV			2.64 V	38	55.2	42.6
3	11550.00	64.2 PK	74.0	-9.8	1.78 V	259	40.3	23.9
4	11550.00	50.7 AV	54.0	-3.3	1.78 V	259	26.8	23.9
5	#17325.00	-	-	-	-	-	-	-
6	23100.00	-	-	-	-	-	-	-
7	#28875.00	-	-	-	-	-	-	-
8	#34650.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

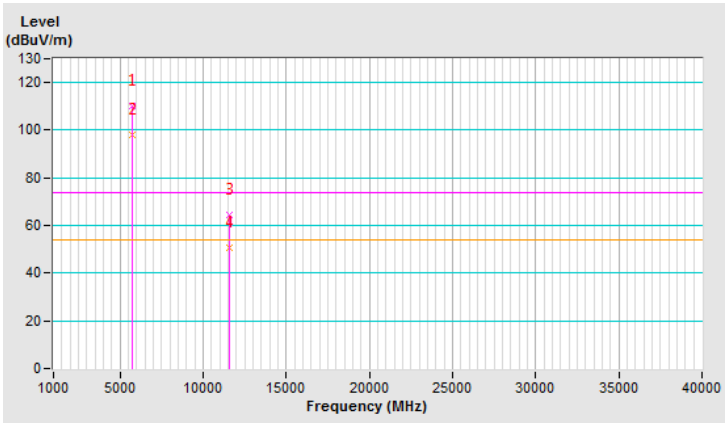


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA-MIMO
基 本 波 頻 率 ：	CH 155：5775 MHz (OOBE)	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=3kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 07 月 08 日	測 試 者 ：	李哲銘

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5649.60	66.4 PK	68.2	-1.8	1.00 H	40	53.8	12.6
2	#5945.60	66.9 PK	68.2	-1.3	1.00 H	40	53.3	13.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

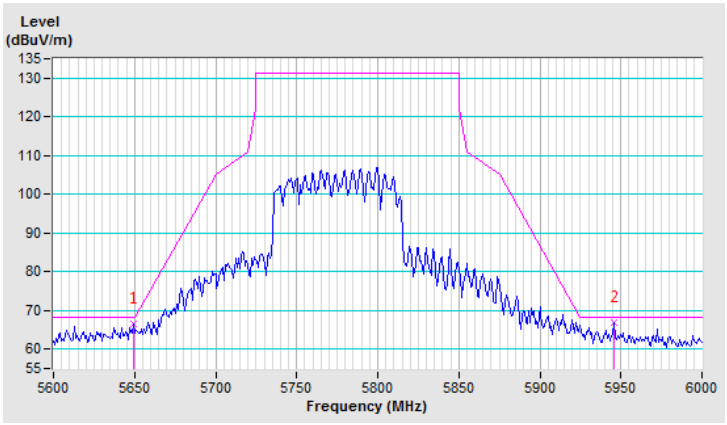


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA-MIMO
基 本 波 頻 率 ：	CH 155：5775 MHz (OOBE)	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=3kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 07 月 08 日	測 試 者 ：	李哲銘

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5644.00	67.2 PK	68.2	-1.0	2.64 V	38	54.5	12.7
2	#5940.00	67.1 PK	68.2	-1.1	2.64 V	38	53.5	13.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

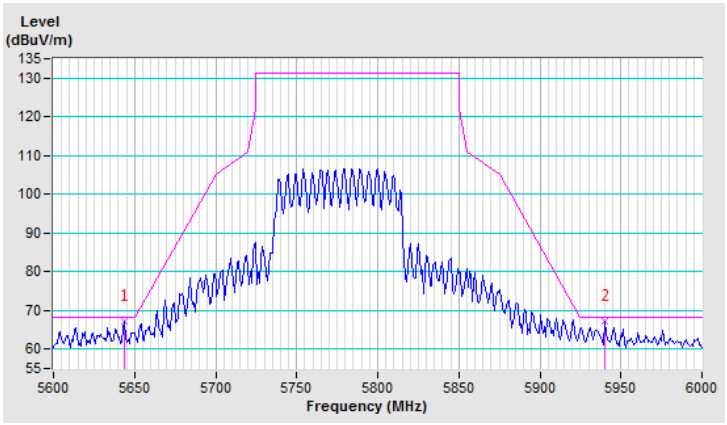

4TX


802.11a

操 作 模 式 ：	發射	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 36：5180 MHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 07 月 05 日	測 試 者 ：	張家誠

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	70.7 PK	74.0	-3.3	1.00 H	339	58.1	12.6
2	5150.00	52.6 AV	54.0	-1.4	1.00 H	339	40.0	12.6
3	*5180.00	111.7 PK			1.09 H	335	70.2	41.5
4	*5180.00	102.7 AV			1.09 H	335	61.2	41.5
5	#10360.00	62.3 PK	68.2	-5.9	2.99 H	263	39.8	22.5
6	15540.00	-	-	-	-	-	-	-
7	20720.00	-	-	-	-	-	-	-
8	#25900.00	-	-	-	-	-	-	-
9	#31080.00	-	-	-	-	-	-	-
10	#36260.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

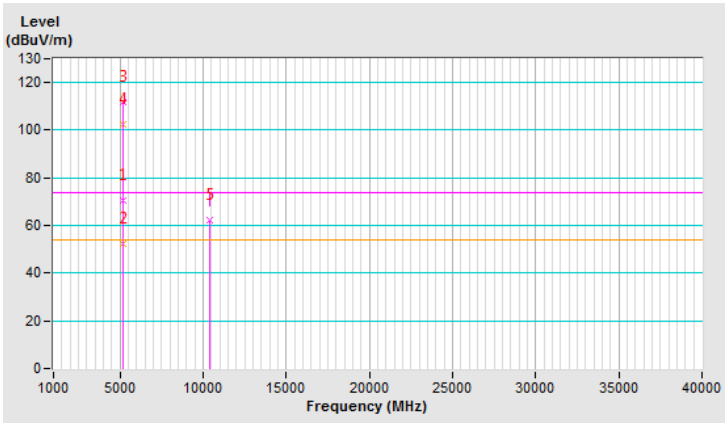


操 作 模 式 ：	發射	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 36：5180 MHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 07 月 06 日	測 試 者 ：	張家誠

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	71.3 PK	74.0	-2.7	2.20 V	24	58.7	12.6
2	5150.00	52.9 AV	54.0	-1.1	2.20 V	24	40.3	12.6
3	*5180.00	112.4 PK			1.09 V	40	70.9	41.5
4	*5180.00	103.4 AV			1.09 V	40	61.9	41.5
5	#10360.00	62.6 PK	68.2	-5.6	2.07 V	141	40.1	22.5
6	15540.00	-	-	-	-	-	-	-
7	20720.00	-	-	-	-	-	-	-
8	#25900.00	-	-	-	-	-	-	-
9	#31080.00	-	-	-	-	-	-	-
10	#36260.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

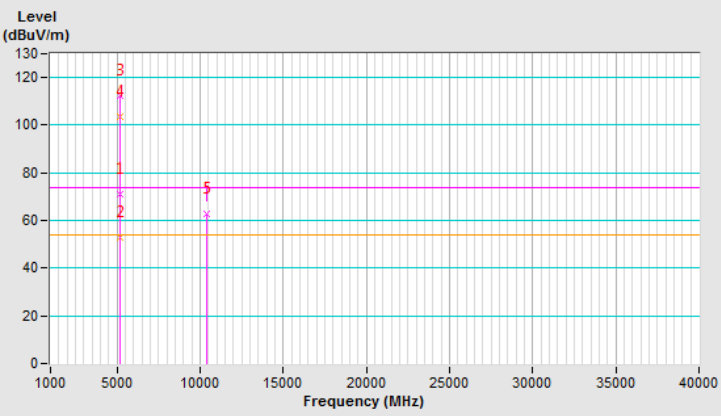


操作模式：	發射	調變技術：	OFDM
基本波頻率：	CH 40：5200 MHz	測試儀器：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量測場地溫度：	25℃	量測場地濕度：	70%RH
測試日期：	108 年 07 月 05 日	測試者：	張家誠

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	70.0 PK	74.0	-4.0	1.52 H	349	57.4	12.6
2	5150.00	52.8 AV	54.0	-1.2	1.52 H	349	40.2	12.6
3	*5200.00	117.3 PK			2.11 H	342	75.8	41.5
4	*5200.00	107.2 AV			2.11 H	342	65.7	41.5
5	#10400.00	62.4 PK	68.2	-5.8	2.96 H	233	39.5	22.9
6	15600.00	-	-	-	-	-	-	-
7	20800.00	-	-	-	-	-	-	-
8	#26000.00	-	-	-	-	-	-	-
9	31200.00	-	-	-	-	-	-	-
10	#36400.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

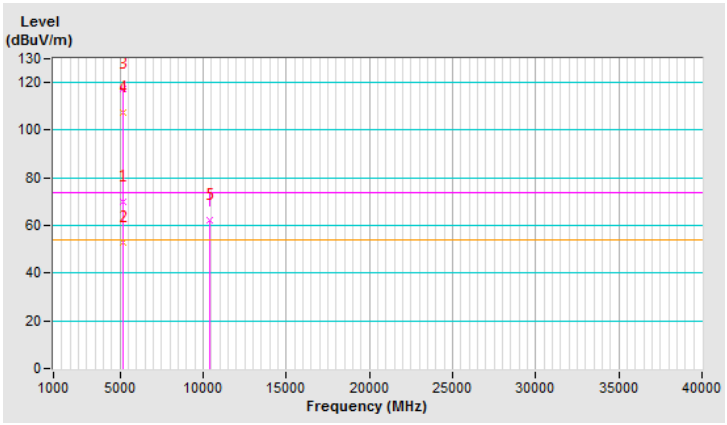


操作模式：	發射	調變技術：	OFDM
基本波頻率：	CH 40：5200 MHz	測試儀器：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量測場地溫度：	25℃	量測場地濕度：	70%RH
測試日期：	108 年 07 月 06 日	測試者：	張家誠

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	70.2 PK	74.0	-3.8	1.05 V	20	57.6	12.6
2	5150.00	53.1 AV	54.0	-0.9	1.05 V	20	40.5	12.6
3	*5200.00	117.9 PK			2.62 V	24	76.4	41.5
4	*5200.00	107.9 AV			2.62 V	24	66.4	41.5
5	#10400.00	62.7 PK	68.2	-5.5	1.32 V	136	39.8	22.9
6	15600.00	-	-	-	-	-	-	-
7	20800.00	-	-	-	-	-	-	-
8	#26000.00	-	-	-	-	-	-	-
9	31200.00	-	-	-	-	-	-	-
10	#36400.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

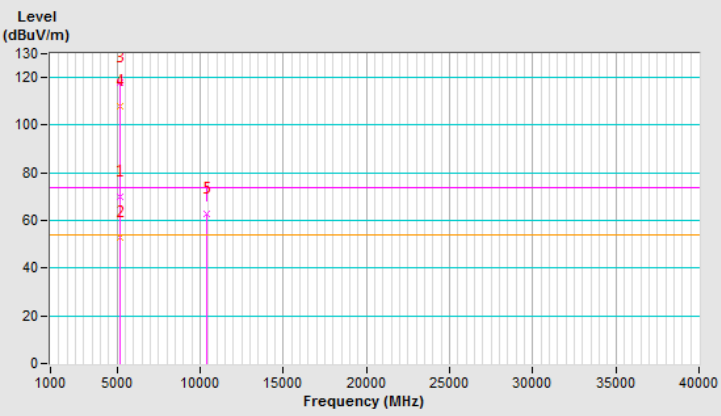


操 作 模 式 ：	發射	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 48：5240 MHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 07 月 05 日	測 試 者 ：	張家誠

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5240.00	117.0 PK			1.00 H	336	75.8	41.2
2	*5240.00	106.9 AV			1.00 H	336	65.7	41.2
3	5350.00	61.5 PK	74.0	-12.5	1.09 H	315	49.1	12.4
4	5350.00	47.2 AV	54.0	-6.8	1.09 H	315	34.8	12.4
5	#10480.00	62.7 PK	68.2	-5.5	2.09 H	263	39.9	22.8
6	15720.00	-	-	-	-	-	-	-
7	20960.00	-	-	-	-	-	-	-
8	#26200.00	-	-	-	-	-	-	-
9	31440.00	-	-	-	-	-	-	-
10	#36680.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

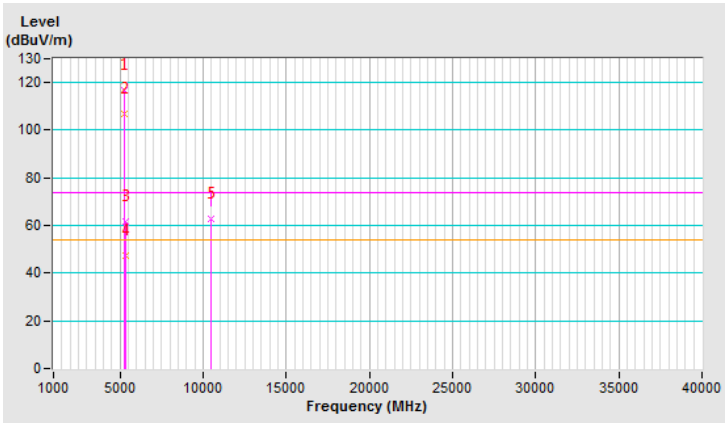


操 作 模 式 ：	發射	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 48：5240 MHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 07 月 06 日	測 試 者 ：	張家誠

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5240.00	117.6 PK			1.00 V	29	76.4	41.2
2	*5240.00	107.5 AV			1.00 V	29	66.3	41.2
3	5350.00	61.9 PK	74.0	-12.1	1.01 V	29	49.5	12.4
4	5350.00	47.4 AV	54.0	-6.6	1.01 V	29	35.0	12.4
5	#10480.00	63.0 PK	68.2	-5.2	1.36 V	102	40.2	22.8
6	15720.00	-	-	-	-	-	-	-
7	20960.00	-	-	-	-	-	-	-
8	#26200.00	-	-	-	-	-	-	-
9	31440.00	-	-	-	-	-	-	-
10	#36680.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

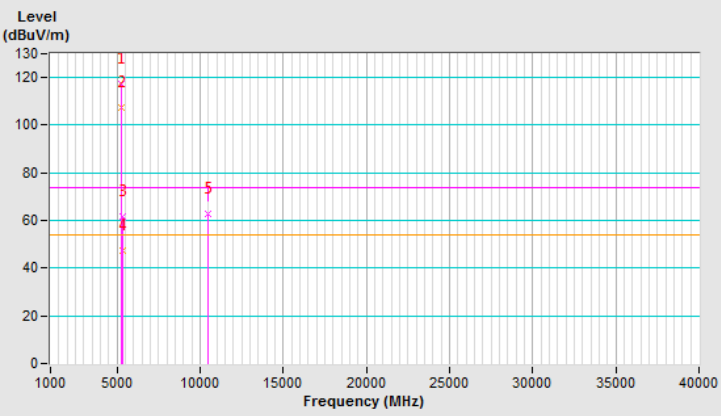


操作模式：	發射	調變技術：	OFDM
基本波頻率：	CH 149：5745 MHz	測試儀器：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量測場地溫度：	25℃	量測場地濕度：	67%RH
測試日期：	108 年 07 月 06 日	測試者：	張家誠

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5745.00	116.0 PK			1.00 H	44	73.5	42.5
2	*5745.00	106.3 AV			1.00 H	44	63.8	42.5
3	11490.00	63.6 PK	74.0	-10.4	2.96 H	200	39.5	24.1
4	11490.00	51.2 AV	54.0	-2.8	2.96 H	200	27.1	24.1
5	#17235.00	-	-	-	-	-	-	-
6	22980.00	-	-	-	-	-	-	-
7	#28725.00	-	-	-	-	-	-	-
8	#34470.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

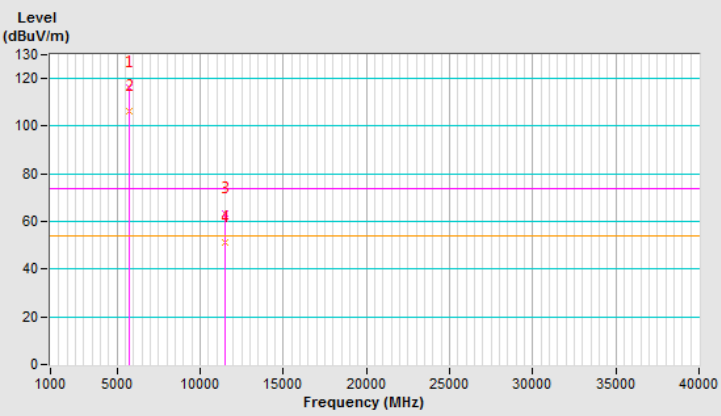


操 作 模 式 ：	發射	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 149：5745 MHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 07 月 06 日	測 試 者 ：	張家誠

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5745.00	115.0 PK			1.00 V	6	72.5	42.5
2	*5745.00	105.3 AV			1.00 V	6	62.8	42.5
3	11490.00	63.3 PK	74.0	-10.7	3.11 V	326	39.2	24.1
4	11490.00	51.1 AV	54.0	-2.9	3.11 V	326	27.0	24.1
5	#17235.00	-	-	-	-	-	-	-
6	22980.00	-	-	-	-	-	-	-
7	#28725.00	-	-	-	-	-	-	-
8	#34470.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

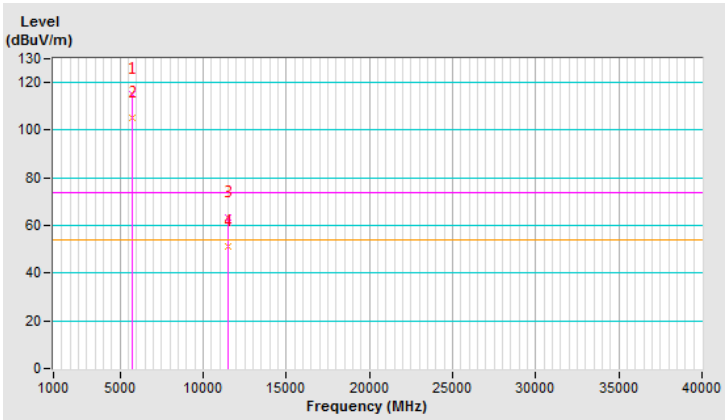


操 作 模 式 ：	發射	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 149：5745 MHz (OOBE)	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	67%RH
測 試 日 期 ：	108 年 07 月 06 日	測 試 者 ：	張家誠

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5646.40	63.0 PK	68.2	-5.2	1.00 H	44	50.4	12.6
2	#5972.80	63.7 PK	68.2	-4.5	1.00 H	44	50.0	13.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

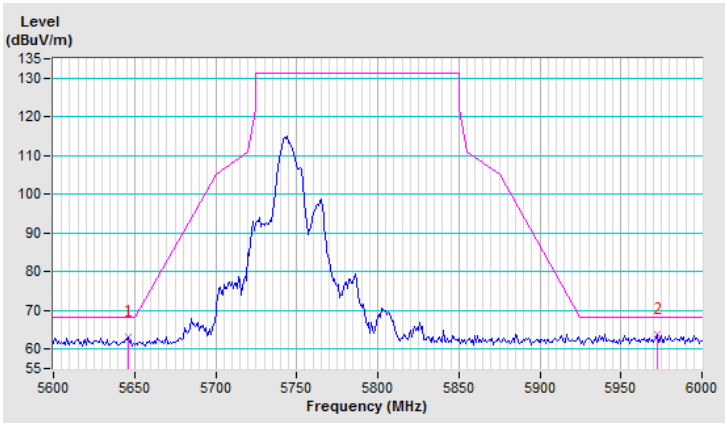


操 作 模 式 ：	發射	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 149：5745 MHz (OOBE)	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	67%RH
測 試 日 期 ：	108 年 07 月 06 日	測 試 者 ：	張家誠

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5615.20	62.5 PK	68.2	-5.7	1.00 V	6	49.8	12.7
2	#5992.00	62.7 PK	68.2	-5.5	1.00 V	6	48.9	13.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

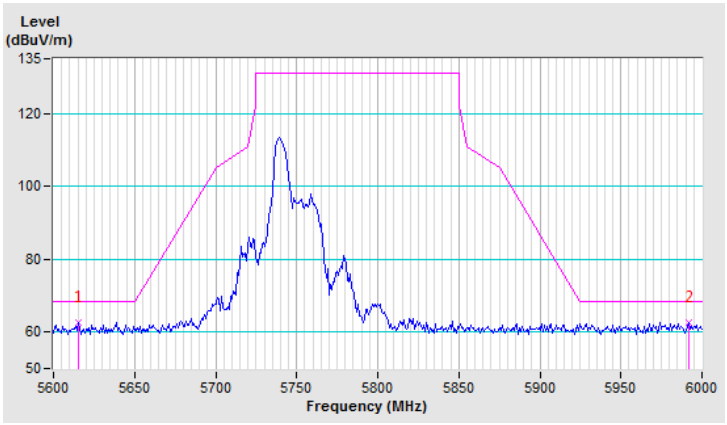


操 作 模 式 ：	發射	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 157：5785 MHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	67%RH
測 試 日 期 ：	108 年 07 月 06 日	測 試 者 ：	張家誠

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5785.00	117.0 PK			1.05 H	42	74.4	42.6
2	*5785.00	107.3 AV			1.05 H	42	64.7	42.6
3	11570.00	63.9 PK	74.0	-10.1	3.11 H	163	39.9	24.0
4	11570.00	51.2 AV	54.0	-2.8	3.11 H	163	27.2	24.0
5	#17355.00	-	-	-	-	-	-	-
6	#23140.00	-	-	-	-	-	-	-
7	#28925.00	-	-	-	-	-	-	-
8	#34710.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

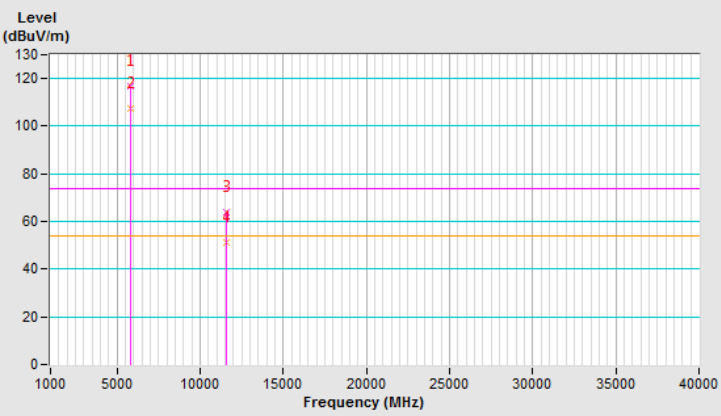


操 作 模 式 ：	發射	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 157：5785 MHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	67%RH
測 試 日 期 ：	108 年 07 月 06 日	測 試 者 ：	張家誠

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5785.00	116.0 PK			1.01 V	7	73.4	42.6
2	*5785.00	106.3 AV			1.01 V	7	63.7	42.6
3	11570.00	63.6 PK	74.0	-10.4	2.63 V	326	39.6	24.0
4	11570.00	50.9 AV	54.0	-3.1	2.63 V	326	26.9	24.0
5	#17355.00	-	-	-	-	-	-	-
6	#23140.00	-	-	-	-	-	-	-
7	#28925.00	-	-	-	-	-	-	-
8	#34710.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

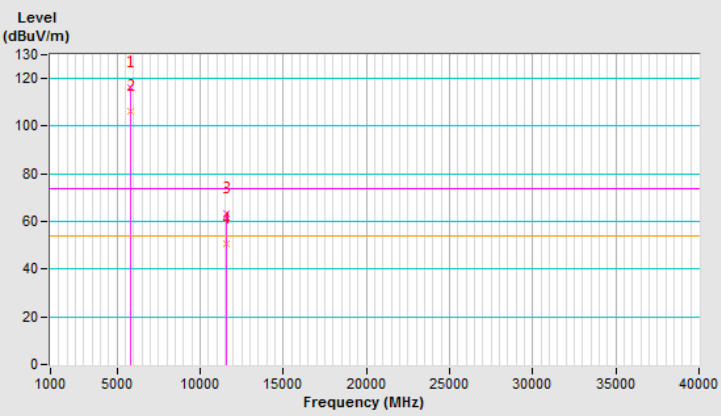


操 作 模 式 ：	發射	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 157：5785 MHz (OOBE)	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	67%RH
測 試 日 期 ：	108 年 07 月 06 日	測 試 者 ：	張家誠

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5619.20	63.5 PK	68.2	-4.7	1.05 H	42	50.8	12.7
2	#5968.00	64.5 PK	68.2	-3.7	1.05 H	42	50.8	13.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

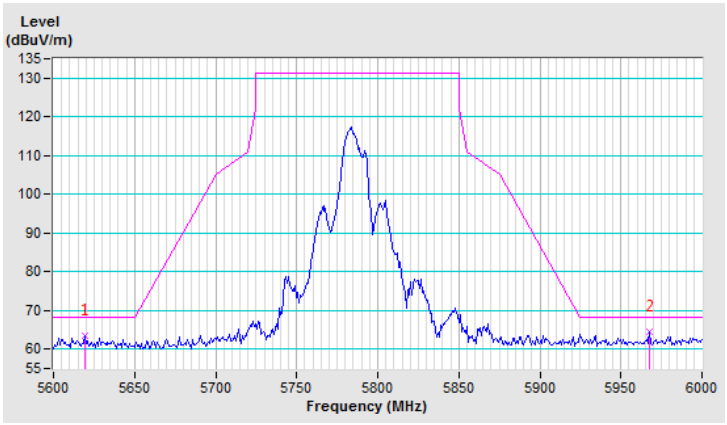


操 作 模 式 ：	發射	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 157：5785 MHz (OOBE)	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	67%RH
測 試 日 期 ：	108 年 07 月 06 日	測 試 者 ：	張家誠

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5609.60	62.9 PK	68.2	-5.3	1.01 V	7	50.2	12.7
2	#5951.20	63.7 PK	68.2	-4.5	1.01 V	7	50.1	13.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

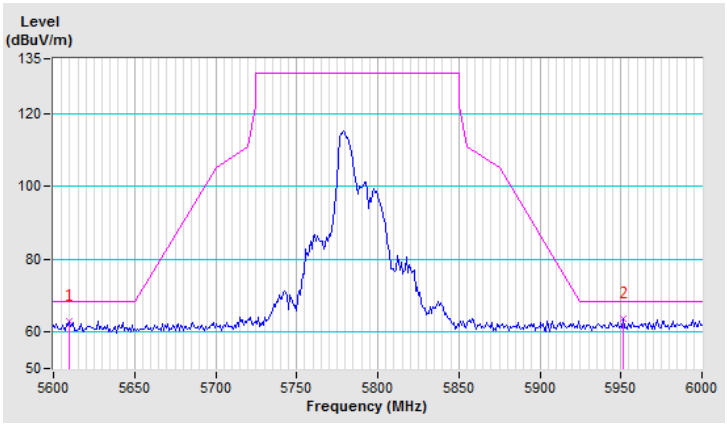


操作模式：	發射	調變技術：	OFDM
基本波頻率：	CH 165：5825 MHz	測試儀器：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量測場地溫度：	25℃	量測場地濕度：	67%RH
測試日期：	108 年 07 月 06 日	測試者：	張家誠

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5825.00	116.3 PK			1.00 H	46	73.7	42.6
2	*5825.00	106.4 AV			1.00 H	46	63.8	42.6
3	11650.00	63.6 PK	74.0	-10.4	3.33 H	336	40.0	23.6
4	11650.00	50.8 AV	54.0	-3.2	3.33 H	336	27.2	23.6
5	#17475.00	-	-	-	-	-	-	-
6	#23300.00	-	-	-	-	-	-	-
7	#29125.00	-	-	-	-	-	-	-
8	#34950.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

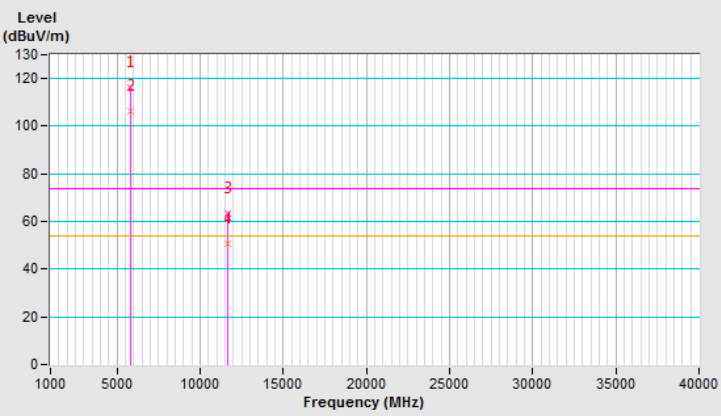


操 作 模 式 ：	發射	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 165：5825 MHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	67%RH
測 試 日 期 ：	108 年 07 月 06 日	測 試 者 ：	張家誠

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5825.00	115.3 PK			1.00 V	11	72.7	42.6
2	*5825.00	105.4 AV			1.00 V	11	62.8	42.6
3	11650.00	63.5 PK	74.0	-10.5	3.00 V	322	39.9	23.6
4	11650.00	50.6 AV	54.0	-3.4	3.00 V	322	27.0	23.6
5	#17475.00	-	-	-	-	-	-	-
6	#23300.00	-	-	-	-	-	-	-
7	#29125.00	-	-	-	-	-	-	-
8	#34950.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

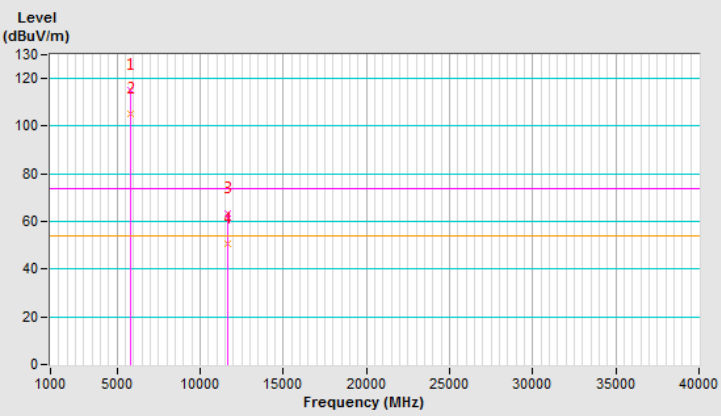


操 作 模 式 ：	發射	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 165：5825 MHz (OOBE)	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	67%RH
測 試 日 期 ：	108 年 07 月 06 日	測 試 者 ：	張家誠

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5613.60	64.3 PK	68.2	-3.9	1.00 H	46	51.6	12.7
2	#5944.00	64.2 PK	68.2	-4.0	1.00 H	46	50.6	13.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

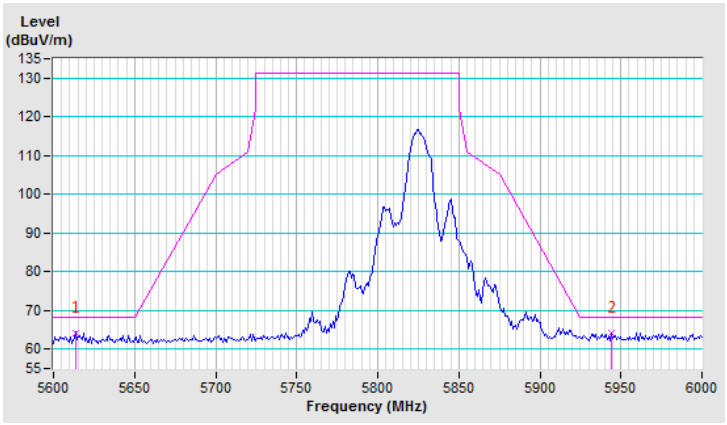


操 作 模 式 ：	發射	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 165：5825 MHz (OOBE)	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	67%RH
測 試 日 期 ：	108 年 07 月 06 日	測 試 者 ：	張家誠

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5607.20	63.9 PK	68.2	-4.3	1.00 V	11	51.2	12.7
2	#5964.80	63.5 PK	68.2	-4.7	1.00 V	11	49.8	13.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

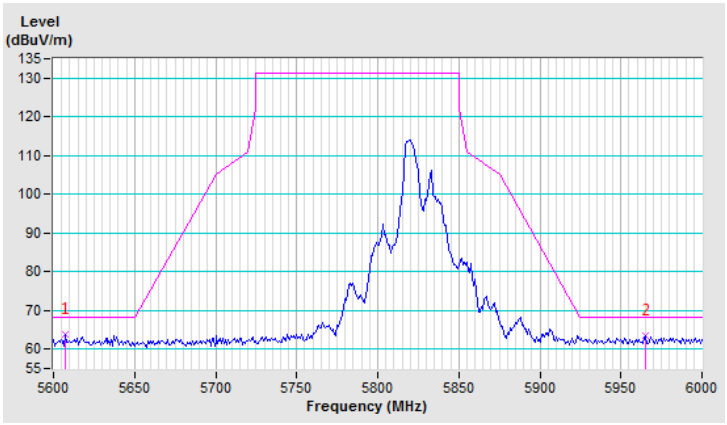


802.11ax (HE20)

操作模式：	發射	調變技術：	OFDM
基本波頻率：	CH 36：5180 MHz	測試儀器：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量測場地溫度：	25℃	量測場地濕度：	70%RH
測試日期：	108 年 07 月 05 日	測試者：	張家誠

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	68.8 PK	74.0	-5.2	1.00 H	340	56.2	12.6
2	5150.00	52.5 AV	54.0	-1.5	1.00 H	340	39.9	12.6
3	*5180.00	112.8 PK			1.00 H	349	71.3	41.5
4	*5180.00	100.8 AV			1.00 H	349	59.3	41.5
5	#10360.00	62.0 PK	68.2	-6.2	2.66 H	233	39.5	22.5
6	15540.00	-	-	-	-	-	-	-
7	20720.00	-	-	-	-	-	-	-
8	#25900.00	-	-	-	-	-	-	-
9	#31080.00	-	-	-	-	-	-	-
10	#36260.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

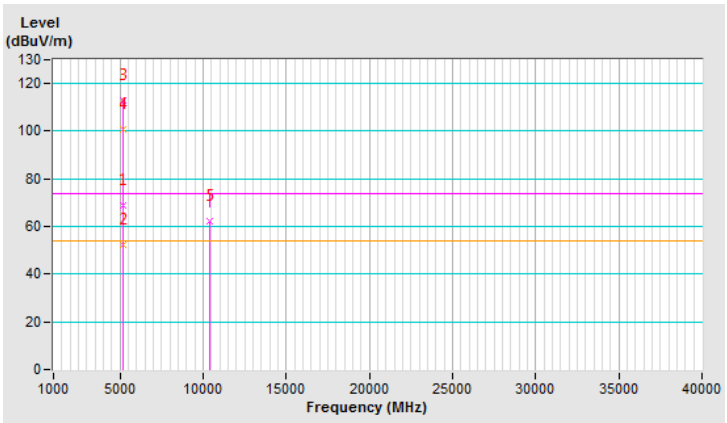


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA-MIMO
基 本 波 頻 率 ：	CH 36：5180 MHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 07 月 06 日	測 試 者 ：	張家誠

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	69.1 PK	74.0	-4.9	1.09 V	26	56.5	12.6
2	5150.00	52.9 AV	54.0	-1.1	1.09 V	26	40.3	12.6
3	*5180.00	113.4 PK			1.05 V	23	71.9	41.5
4	*5180.00	101.4 AV			1.05 V	23	59.9	41.5
5	#10360.00	62.6 PK	68.2	-5.6	2.33 V	216	40.1	22.5
6	15540.00	-	-	-	-	-	-	-
7	20720.00	-	-	-	-	-	-	-
8	#25900.00	-	-	-	-	-	-	-
9	#31080.00	-	-	-	-	-	-	-
10	#36260.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

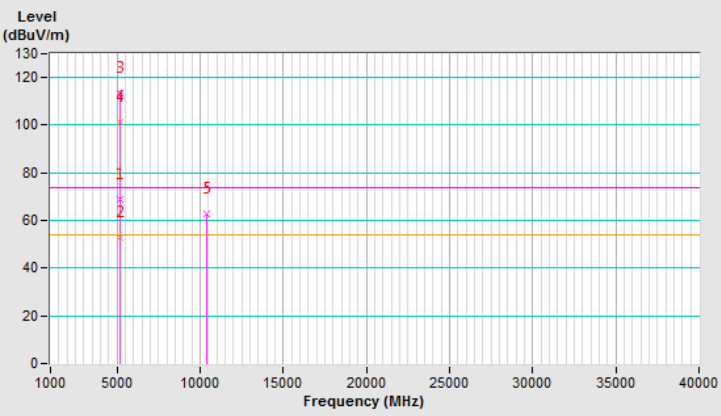


操作模式：	發射	調變技術：	OFDMA-MIMO
基本波頻率：	CH 40：5200 MHz	測試儀器：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量測場地溫度：	25℃	量測場地濕度：	70%RH
測試日期：	108 年 07 月 05 日	測試者：	張家誠

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	67.8 PK	74.0	-6.2	1.03 H	346	55.2	12.6
2	5150.00	53.0 AV	54.0	-1.0	1.03 H	346	40.4	12.6
3	*5200.00	116.8 PK			1.03 H	341	75.3	41.5
4	*5200.00	105.2 AV			1.03 H	341	63.7	41.5
5	#10400.00	62.9 PK	68.2	-5.3	3.15 H	299	40.0	22.9
6	15600.00	-	-	-	-	-	-	-
7	20800.00	-	-	-	-	-	-	-
8	#26000.00	-	-	-	-	-	-	-
9	31200.00	-	-	-	-	-	-	-
10	#36400.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

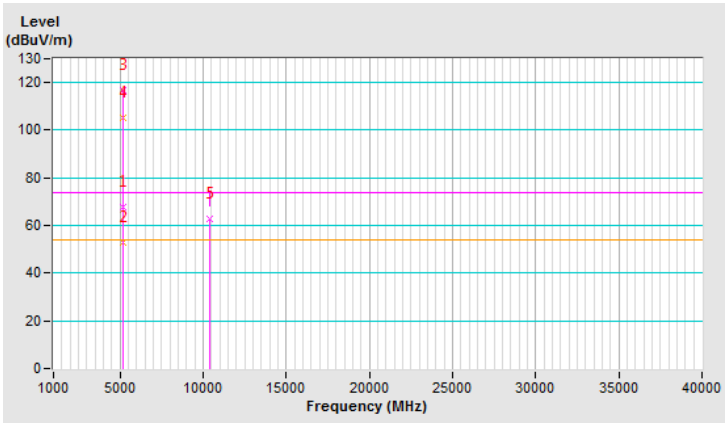


操作模式：	發射	調變技術：	OFDMA-MIMO
基本波頻率：	CH 40：5200 MHz	測試儀器：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量測場地溫度：	25℃	量測場地濕度：	70%RH
測試日期：	108 年 07 月 06 日	測試者：	張家誠

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	68.1 PK	74.0	-5.9	1.06 V	31	55.5	12.6
2	5150.00	53.2 AV	54.0	-0.8	1.06 V	31	40.6	12.6
3	*5200.00	117.4 PK			1.09 V	32	75.9	41.5
4	*5200.00	106.0 AV			1.09 V	32	64.5	41.5
5	#10400.00	63.1 PK	68.2	-5.1	1.31 V	133	40.2	22.9
6	15600.00	-	-	-	-	-	-	-
7	20800.00	-	-	-	-	-	-	-
8	#26000.00	-	-	-	-	-	-	-
9	31200.00	-	-	-	-	-	-	-
10	#36400.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

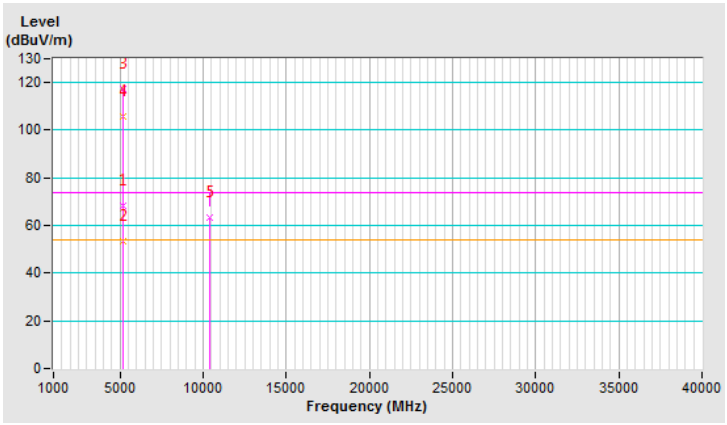


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA-MIMO
基 本 波 頻 率 ：	CH 48：5240 MHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 07 月 05 日	測 試 者 ：	張家誠

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5240.00	118.0 PK			1.01 H	335	76.8	41.2
2	*5240.00	106.1 AV			1.01 H	335	64.9	41.2
3	5350.00	61.1 PK	74.0	-12.9	1.09 H	335	48.7	12.4
4	5350.00	47.9 AV	54.0	-6.1	1.09 H	335	35.5	12.4
5	#10480.00	62.4 PK	68.2	-5.8	2.33 H	322	39.6	22.8
6	15720.00	-	-	-	-	-	-	-
7	20960.00	-	-	-	-	-	-	-
8	#26200.00	-	-	-	-	-	-	-
9	31440.00	-	-	-	-	-	-	-
10	#36680.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

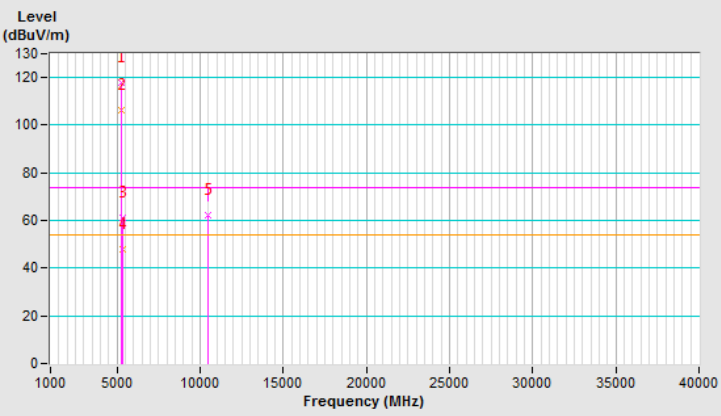


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA-MIMO
基 本 波 頻 率 ：	CH 48：5240 MHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 07 月 06 日	測 試 者 ：	張家誠

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5240.00	118.6 PK			1.09 V	33	77.4	41.2
2	*5240.00	106.6 AV			1.09 V	33	65.4	41.2
3	5350.00	61.3 PK	74.0	-12.7	1.06 V	36	48.9	12.4
4	5350.00	48.1 AV	54.0	-5.9	1.06 V	36	35.7	12.4
5	#10480.00	62.7 PK	68.2	-5.5	2.33 V	233	39.9	22.8
6	15720.00	-	-	-	-	-	-	-
7	20960.00	-	-	-	-	-	-	-
8	#26200.00	-	-	-	-	-	-	-
9	31440.00	-	-	-	-	-	-	-
10	#36680.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

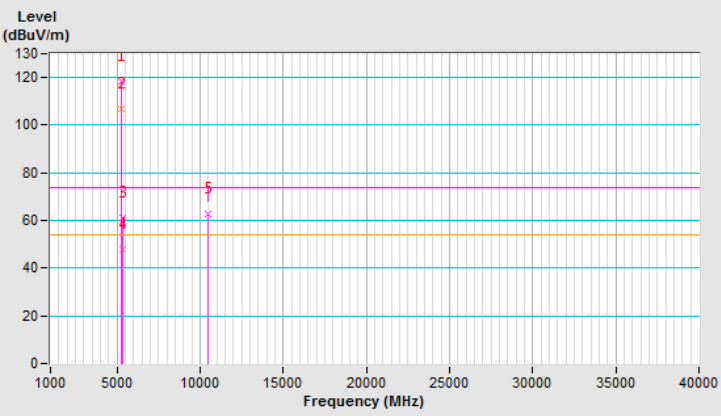


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA-MIMO
基 本 波 頻 率 ：	CH 149：5745 MHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	67%RH
測 試 日 期 ：	108 年 07 月 06 日	測 試 者 ：	張家誠

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5745.00	116.4 PK			1.00 H	44	73.9	42.5
2	*5745.00	105.1 AV			1.00 H	44	62.6	42.5
3	11490.00	64.0 PK	74.0	-10.0	2.36 H	326	39.9	24.1
4	11490.00	51.2 AV	54.0	-2.8	2.36 H	326	27.1	24.1
5	#17235.00	-	-	-	-	-	-	-
6	22980.00	-	-	-	-	-	-	-
7	#28725.00	-	-	-	-	-	-	-
8	#34470.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

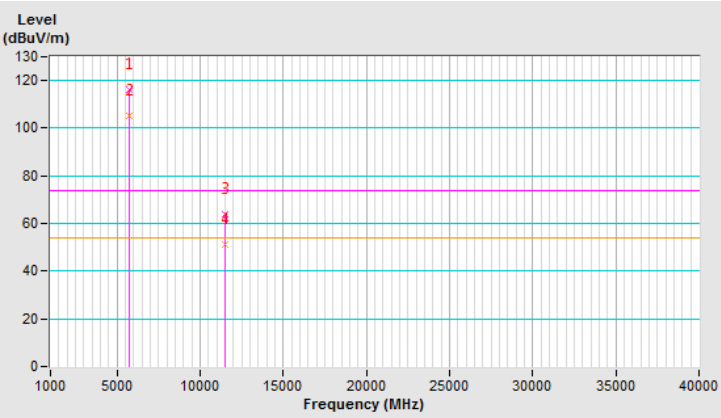


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA-MIMO
基 本 波 頻 率 ：	CH 149：5745 MHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	67%RH
測 試 日 期 ：	108 年 07 月 06 日	測 試 者 ：	張家誠

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5745.00	115.4 PK			1.00 V	22	72.9	42.5
2	*5745.00	104.1 AV			1.00 V	22	61.6	42.5
3	11490.00	63.8 PK	74.0	-10.2	3.26 V	233	39.7	24.1
4	11490.00	51.0 AV	54.0	-3.0	3.26 V	233	26.9	24.1
5	#17235.00	-	-	-	-	-	-	-
6	22980.00	-	-	-	-	-	-	-
7	#28725.00	-	-	-	-	-	-	-
8	#34470.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

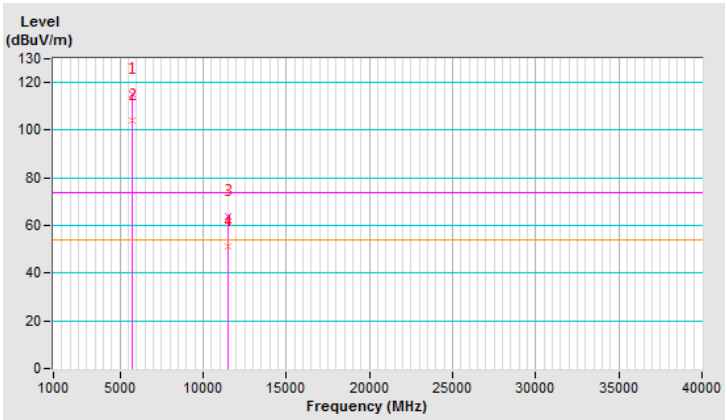


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA-MIMO
基 本 波 頻 率 ：	CH 149：5745 MHz (OOBE)	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	67%RH
測 試 日 期 ：	108 年 07 月 06 日	測 試 者 ：	張家誠

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5616.00	64.2 PK	68.2	-4.0	1.00 H	44	51.5	12.7
2	#5968.80	65.0 PK	68.2	-3.2	1.00 H	44	51.3	13.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

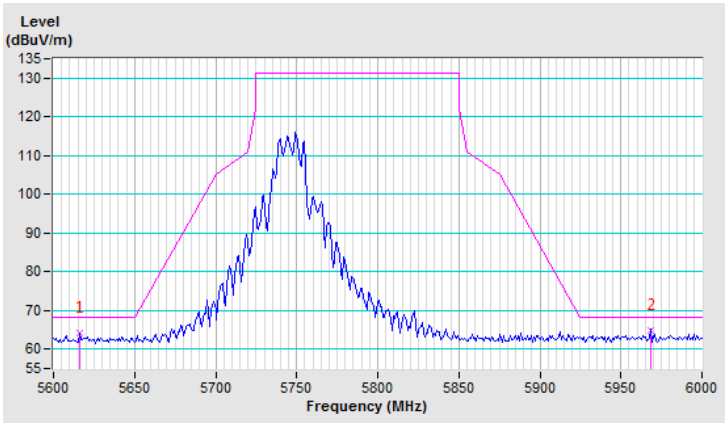


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA-MIMO
基 本 波 頻 率 ：	CH 149：5745 MHz (OOBE)	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	67%RH
測 試 日 期 ：	108 年 07 月 06 日	測 試 者 ：	張家誠

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5611.20	63.5 PK	68.2	-4.7	1.00 V	22	50.8	12.7
2	#5991.20	63.2 PK	68.2	-5.0	1.00 V	22	49.4	13.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

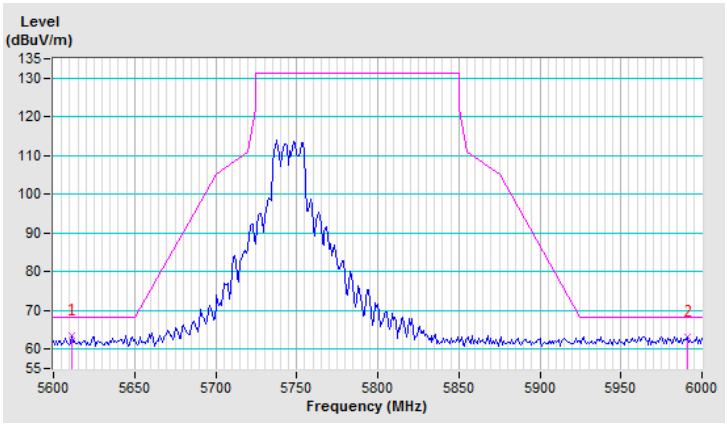


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA-MIMO
基 本 波 頻 率 ：	CH 157：5785 MHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	67%RH
測 試 日 期 ：	108 年 07 月 06 日	測 試 者 ：	張家誠

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5785.00	117.9 PK			1.05 H	49	75.3	42.6
2	*5785.00	105.9 AV			1.05 H	49	63.3	42.6
3	11570.00	63.9 PK	74.0	-10.1	2.63 H	230	39.9	24.0
4	11570.00	51.2 AV	54.0	-2.8	2.63 H	230	27.2	24.0
5	#17355.00	-	-	-	-	-	-	-
6	#23140.00	-	-	-	-	-	-	-
7	#28925.00	-	-	-	-	-	-	-
8	#34710.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

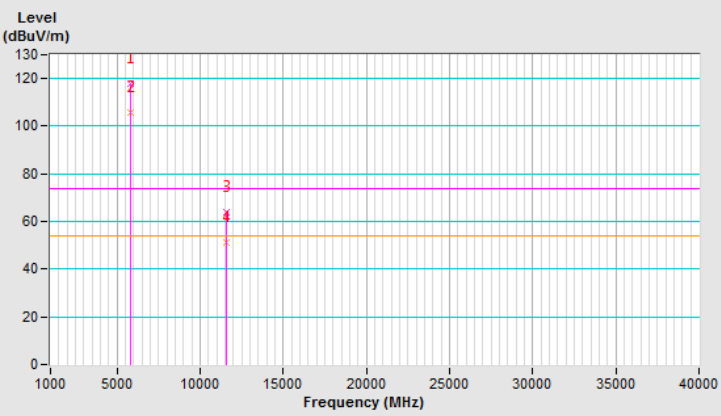


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA-MIMO
基 本 波 頻 率 ：	CH 157：5785 MHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	67%RH
測 試 日 期 ：	108 年 07 月 06 日	測 試 者 ：	張家誠

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5785.00	116.9 PK			1.00 V	25	74.3	42.6
2	*5785.00	104.9 AV			1.00 V	25	62.3	42.6
3	11570.00	63.6 PK	74.0	-10.4	2.63 V	231	39.6	24.0
4	11570.00	50.8 AV	54.0	-3.2	2.63 V	231	26.8	24.0
5	#17355.00	-	-	-	-	-	-	-
6	#23140.00	-	-	-	-	-	-	-
7	#28925.00	-	-	-	-	-	-	-
8	#34710.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

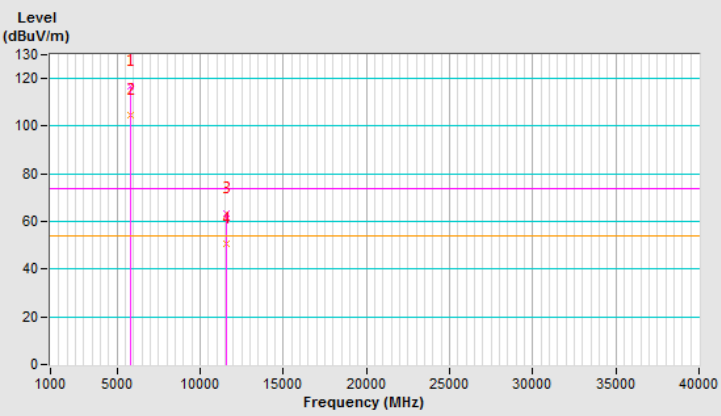


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA-MIMO
基 本 波 頻 率 ：	CH 157：5785 MHz (OOBE)	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	67%RH
測 試 日 期 ：	108 年 07 月 06 日	測 試 者 ：	張家誠

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5612.00	62.5 PK	68.2	-5.7	1.05 H	49	49.8	12.7
2	#5996.80	65.1 PK	68.2	-3.1	1.05 H	49	51.3	13.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

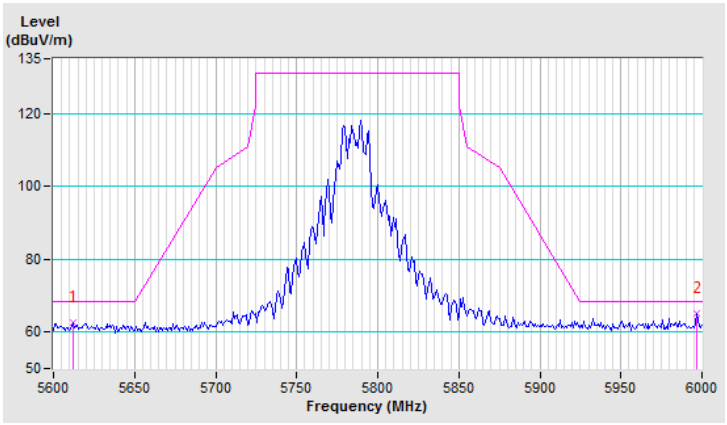


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA-MIMO
基 本 波 頻 率 ：	CH 157：5785 MHz (OOBE)	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	67%RH
測 試 日 期 ：	108 年 07 月 06 日	測 試 者 ：	張家誠

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5639.20	63.3 PK	68.2	-4.9	1.00 V	25	50.6	12.7
2	#5970.40	64.4 PK	68.2	-3.8	1.00 V	25	50.7	13.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

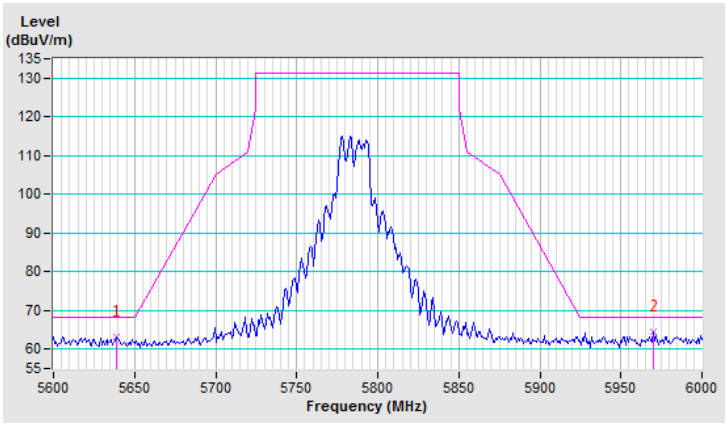


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA-MIMO
基 本 波 頻 率 ：	CH 165：5825 MHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	67%RH
測 試 日 期 ：	108 年 07 月 06 日	測 試 者 ：	張家誠

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5825.00	118.1 PK			1.12 H	44	75.5	42.6
2	*5825.00	104.8 AV			1.12 H	44	62.2	42.6
3	11650.00	63.5 PK	74.0	-10.5	2.66 H	326	39.9	23.6
4	11650.00	50.8 AV	54.0	-3.2	2.66 H	326	27.2	23.6
5	#17475.00	-	-	-	-	-	-	-
6	#23300.00	-	-	-	-	-	-	-
7	#29125.00	-	-	-	-	-	-	-
8	#34950.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

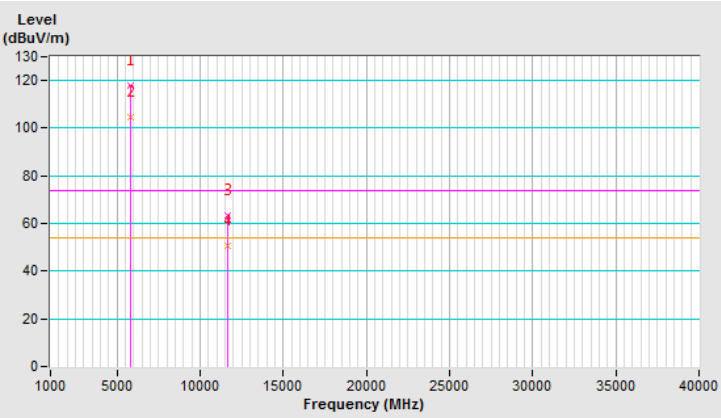


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA-MIMO
基 本 波 頻 率 ：	CH 165：5825 MHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	67%RH
測 試 日 期 ：	108 年 07 月 06 日	測 試 者 ：	張家誠

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5825.00	117.1 PK			1.05 V	11	74.5	42.6
2	*5825.00	103.8 AV			1.05 V	11	61.2	42.6
3	11650.00	63.3 PK	74.0	-10.7	2.06 V	322	39.7	23.6
4	11650.00	50.7 AV	54.0	-3.3	2.06 V	322	27.1	23.6
5	#17475.00	-	-	-	-	-	-	-
6	#23300.00	-	-	-	-	-	-	-
7	#29125.00	-	-	-	-	-	-	-
8	#34950.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

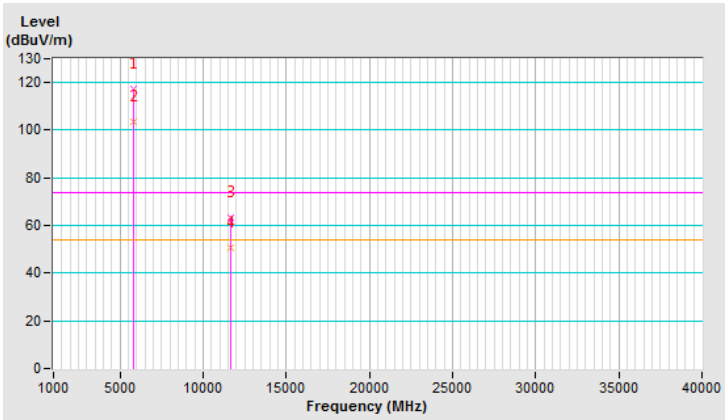


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA-MIMO
基 本 波 頻 率 ：	CH 165：5825 MHz (OOBE)	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	67%RH
測 試 日 期 ：	108 年 07 月 06 日	測 試 者 ：	張家誠

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5609.60	62.5 PK	68.2	-5.7	1.12 H	44	49.8	12.7
2	#5934.40	63.8 PK	68.2	-4.4	1.12 H	44	50.2	13.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

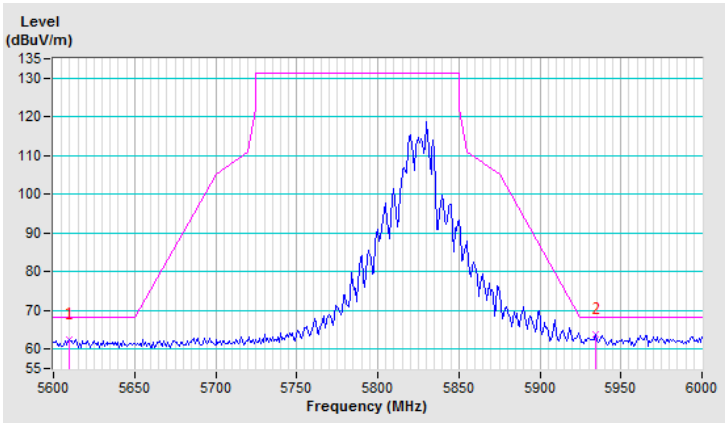


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA-MIMO
基 本 波 頻 率 ：	CH 165：5825 MHz (OOBE)	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	67%RH
測 試 日 期 ：	108 年 07 月 06 日	測 試 者 ：	張家誠

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5620.00	63.3 PK	68.2	-4.9	1.05 V	11	50.6	12.7
2	#5978.40	63.8 PK	68.2	-4.4	1.05 V	11	50.0	13.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

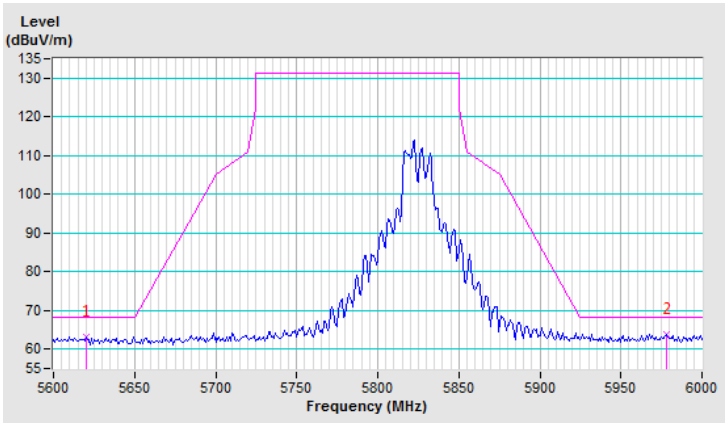

802.11ax (HE40)


操作模式：	發射	調變技術：	OFDMA-MIMO
基本波頻率：	CH 38：5190 MHz	測試儀器：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=3kHz
量測場地溫度：	25℃	量測場地濕度：	70%RH
測試日期：	108 年 07 月 05 日	測試者：	張家誠

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	71.6 PK	74.0	-2.4	1.00 H	344	59.0	12.6
2	5150.00	52.5 AV	54.0	-1.5	1.00 H	344	39.9	12.6
3	*5190.00	109.5 PK			1.05 H	349	68.0	41.5
4	*5190.00	97.5 AV			1.05 H	349	56.0	41.5
5	#10380.00	62.2 PK	68.2	-6.0	2.11 H	152	39.5	22.7
6	15570.00	-	-	-	-	-	-	-
7	20760.00	-	-	-	-	-	-	-
8	#25950.00	-	-	-	-	-	-	-
9	#31140.00	-	-	-	-	-	-	-
10	#36330.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

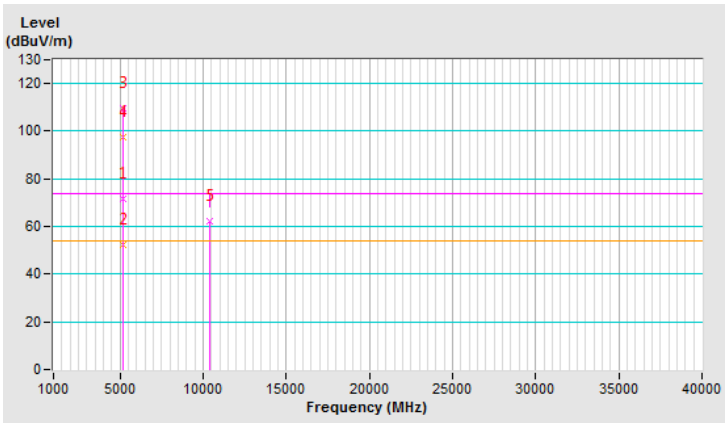


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA-MIMO
基 本 波 頻 率 ：	CH 38：5190 MHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=3kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 07 月 06 日	測 試 者 ：	張家誠

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	71.3 PK	74.0	-2.7	1.05 V	29	58.7	12.6
2	5150.00	52.9 AV	54.0	-1.1	1.05 V	29	40.3	12.6
3	*5190.00	110.3 PK			1.00 V	24	68.8	41.5
4	*5190.00	98.3 AV			1.00 V	24	56.8	41.5
5	#10380.00	62.0 PK	68.2	-6.2	3.06 V	311	39.3	22.7
6	15570.00	-	-	-	-	-	-	-
7	20760.00	-	-	-	-	-	-	-
8	#25950.00	-	-	-	-	-	-	-
9	#31140.00	-	-	-	-	-	-	-
10	#36330.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

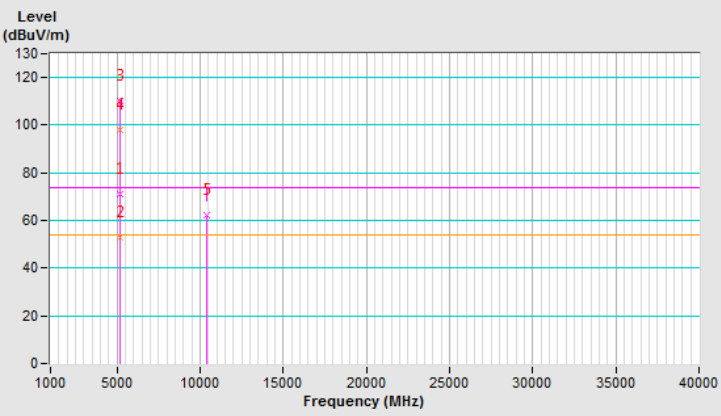


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA-MIMO
基 本 波 頻 率 ：	CH 46：5230 MHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=3kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 07 月 05 日	測 試 者 ：	張家誠

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	66.8 PK	74.0	-7.2	1.05 H	335	54.2	12.6
2	5150.00	52.7 AV	54.0	-1.3	1.05 H	335	40.1	12.6
3	*5230.00	112.7 PK			1.03 H	335	71.4	41.3
4	*5230.00	100.8 AV			1.03 H	335	59.5	41.3
5	5350.00	60.8 PK	74.0	-13.2	1.20 H	341	48.4	12.4
6	5350.00	47.3 AV	54.0	-6.7	1.20 H	341	34.9	12.4
7	#10460.00	62.6 PK	68.2	-5.6	2.30 H	233	39.7	22.9
8	15690.00	-	-	-	-	-	-	-
9	20920.00	-	-	-	-	-	-	-
10	#26150.00	-	-	-	-	-	-	-
11	31380.00	-	-	-	-	-	-	-
12	#36610.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

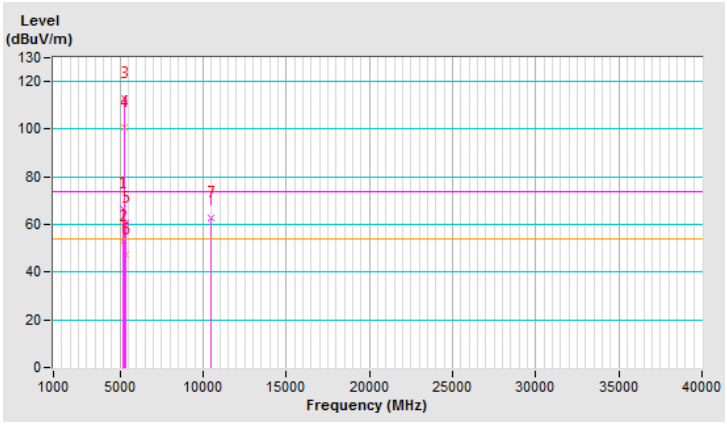


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA-MIMO
基 本 波 頻 率 ：	CH 46：5230 MHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=3kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 07 月 06 日	測 試 者 ：	張家誠

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	67.2 PK	74.0	-6.8	1.04 V	30	54.6	12.6
2	5150.00	53.1 AV	54.0	-0.9	1.04 V	30	40.5	12.6
3	*5230.00	113.4 PK			1.05 V	26	72.1	41.3
4	*5230.00	101.5 AV			1.05 V	26	60.2	41.3
5	5350.00	60.9 PK	74.0	-13.1	1.15 V	29	48.5	12.4
6	5350.00	47.4 AV	54.0	-6.6	1.15 V	29	35.0	12.4
7	#10460.00	62.4 PK	68.2	-5.8	2.22 V	222	39.5	22.9
8	15690.00	-	-	-	-	-	-	-
9	20920.00	-	-	-	-	-	-	-
10	#26150.00	-	-	-	-	-	-	-
11	31380.00	-	-	-	-	-	-	-
12	#36610.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

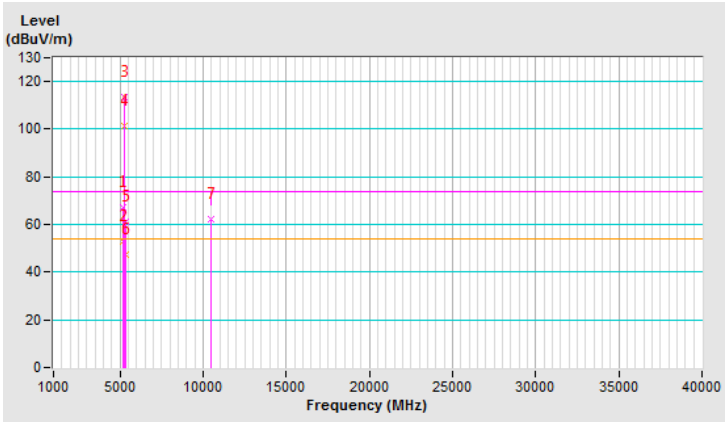


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA-MIMO
基 本 波 頻 率 ：	CH 151：5755 MHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=3kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	67%RH
測 試 日 期 ：	108 年 07 月 06 日	測 試 者 ：	張家誠

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5755.00	113.8 PK			1.01 H	45	71.3	42.5
2	*5755.00	102.1 AV			1.01 H	45	59.6	42.5
3	11510.00	63.8 PK	74.0	-10.2	3.11 H	163	39.9	23.9
4	11510.00	50.8 AV	54.0	-3.2	3.11 H	163	26.9	23.9
5	#17265.00	-	-	-	-	-	-	-
6	23020.00	-	-	-	-	-	-	-
7	#28775.00	-	-	-	-	-	-	-
8	#34530.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

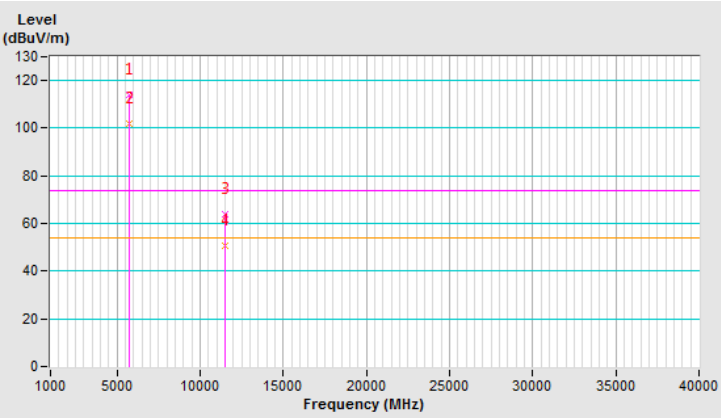


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA-MIMO
基 本 波 頻 率 ：	CH 151：5755 MHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=3kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	67%RH
測 試 日 期 ：	108 年 07 月 06 日	測 試 者 ：	張家誠

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5755.00	112.8 PK			1.00 V	12	70.3	42.5
2	*5755.00	101.1 AV			1.00 V	12	58.6	42.5
3	11510.00	63.5 PK	74.0	-10.5	2.99 V	266	39.6	23.9
4	11510.00	50.6 AV	54.0	-3.4	2.99 V	266	26.7	23.9
5	#17265.00	-	-	-	-	-	-	-
6	23020.00	-	-	-	-	-	-	-
7	#28775.00	-	-	-	-	-	-	-
8	#34530.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

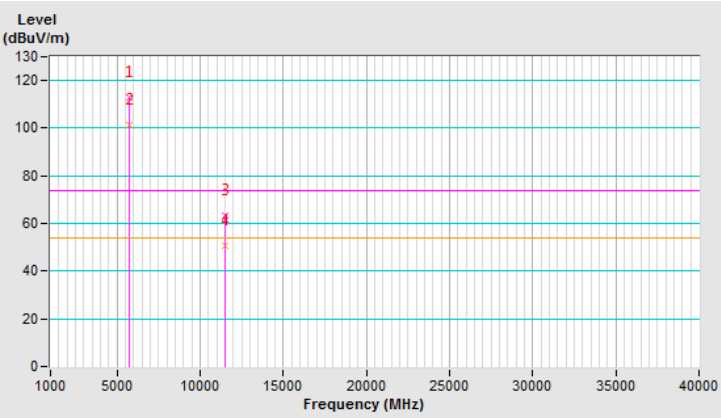


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA-MIMO
基 本 波 頻 率 ：	CH 151：5755 MHz (OOBE)	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=3kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	67%RH
測 試 日 期 ：	108 年 07 月 06 日	測 試 者 ：	張家誠

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5644.80	66.7 PK	68.2	-1.5	1.01 H	45	54.0	12.7
2	#5929.60	65.1 PK	68.2	-3.1	1.01 H	45	51.5	13.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

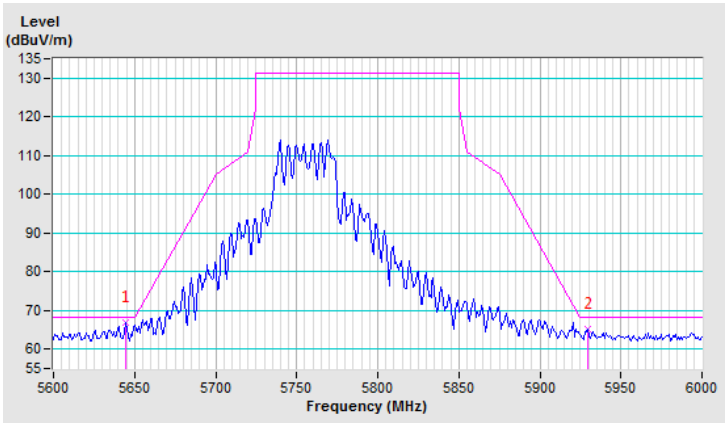


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA-MIMO
基 本 波 頻 率 ：	CH 151：5755 MHz (OOBE)	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=3kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	67%RH
測 試 日 期 ：	108 年 07 月 06 日	測 試 者 ：	張家誠

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5648.00	66.3 PK	68.2	-1.9	1.00 V	12	53.7	12.6
2	#5996.00	63.8 PK	68.2	-4.4	1.00 V	12	50.0	13.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

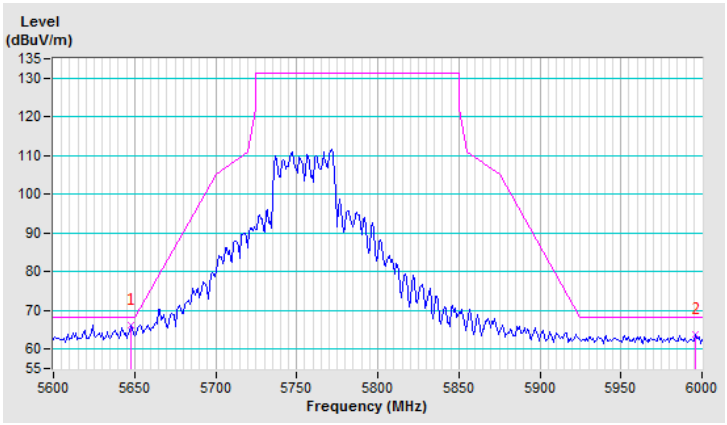


操作模式：	發射	調變技術：	OFDMA-MIMO
基本波頻率：	CH 159：5795 MHz	測試儀器：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=3kHz
量測場地溫度：	25℃	量測場地濕度：	67%RH
測試日期：	108 年 07 月 06 日	測試者：	張家誠

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5795.00	116.1 PK			1.01 H	46	73.5	42.6
2	*5795.00	103.3 AV			1.01 H	46	60.7	42.6
3	11590.00	64.0 PK	74.0	-10.0	1.55 H	122	40.2	23.8
4	11590.00	50.9 AV	54.0	-3.1	1.55 H	122	27.1	23.8
5	#17385.00	-	-	-	-	-	-	-
6	#23180.00	-	-	-	-	-	-	-
7	#28975.00	-	-	-	-	-	-	-
8	#34770.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

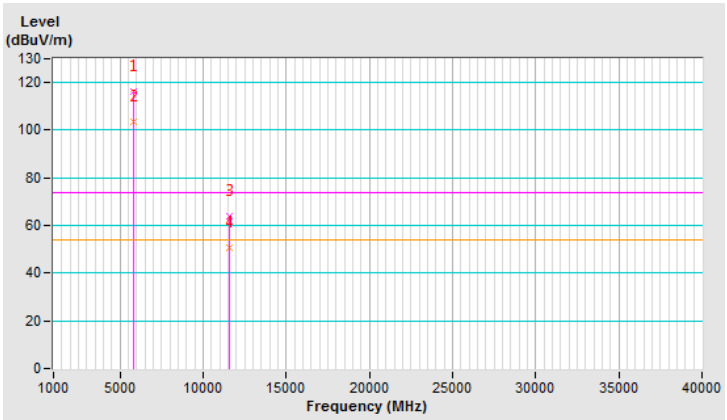


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA-MIMO
基 本 波 頻 率 ：	CH 159：5795 MHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=3kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	67%RH
測 試 日 期 ：	108 年 07 月 06 日	測 試 者 ：	張家誠

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5795.00	115.1 PK			1.00 V	20	72.5	42.6
2	*5795.00	102.3 AV			1.00 V	20	59.7	42.6
3	11590.00	63.7 PK	74.0	-10.3	3.11 V	326	39.9	23.8
4	11590.00	50.8 AV	54.0	-3.2	3.11 V	326	27.0	23.8
5	#17385.00	-	-	-	-	-	-	-
6	#23180.00	-	-	-	-	-	-	-
7	#28975.00	-	-	-	-	-	-	-
8	#34770.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

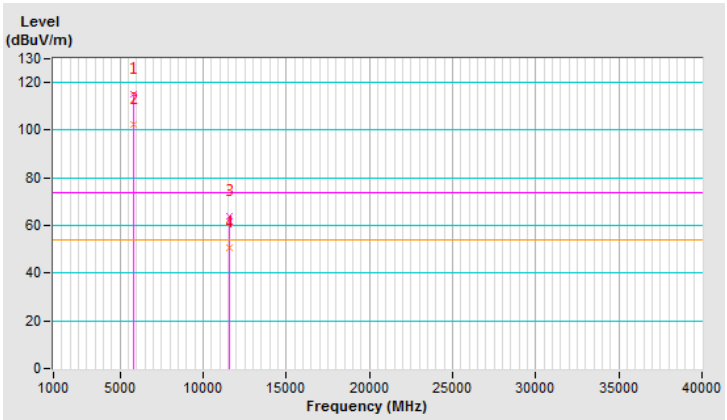


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA-MIMO
基 本 波 頻 率 ：	CH 159：5795 MHz (OOBE)	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=3kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	67%RH
測 試 日 期 ：	108 年 07 月 06 日	測 試 者 ：	張家誠

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5650.40	63.1 PK	68.5	-5.4	1.01 H	46	50.5	12.6
2	#5940.80	66.9 PK	68.2	-1.3	1.01 H	46	53.3	13.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

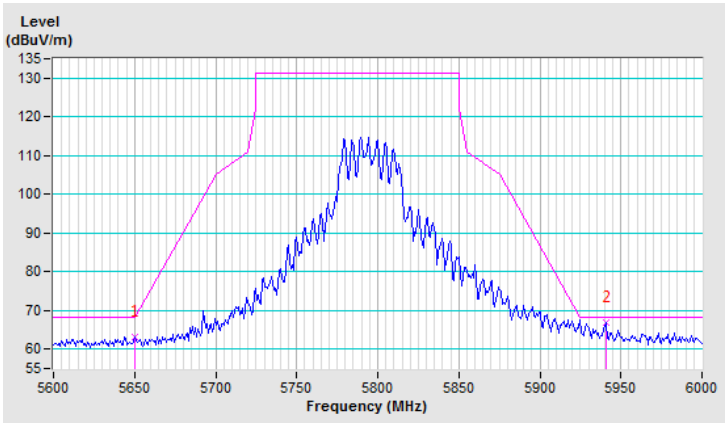


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA-MIMO
基 本 波 頻 率 ：	CH 159：5795 MHz (OOBE)	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=3kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	67%RH
測 試 日 期 ：	108 年 07 月 06 日	測 試 者 ：	張家誠

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5632.00	64.7 PK	68.2	-3.5	1.00 V	20	52.0	12.7
2	#5929.60	65.5 PK	68.2	-2.7	1.00 V	20	51.9	13.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

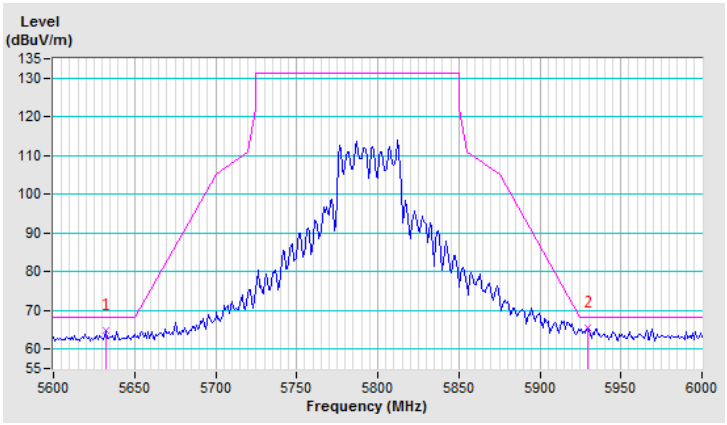


802.11ax (HE80)

操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA-MIMO
基 本 波 頻 率 ：	CH 42：5210 MHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=3kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 07 月 06 日	測 試 者 ：	張家誠

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	67.7 PK	74.0	-6.3	1.00 H	339	55.1	12.6
2	5150.00	52.7 AV	54.0	-1.3	1.00 H	339	40.1	12.6
3	*5210.00	106.2 PK			1.31 H	349	64.8	41.4
4	*5210.00	93.7 AV			1.31 H	349	52.3	41.4
5	5350.00	60.0 PK	74.0	-14.0	1.20 H	331	47.6	12.4
6	5350.00	47.1 AV	54.0	-6.9	1.20 H	331	34.7	12.4
7	#10420.00	62.6 PK	68.2	-5.6	2.09 H	316	39.8	22.8
8	15630.00	-	-	-	-	-	-	-
9	20840.00	-	-	-	-	-	-	-
10	#26050.00	-	-	-	-	-	-	-
11	31260.00	-	-	-	-	-	-	-
12	36470.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

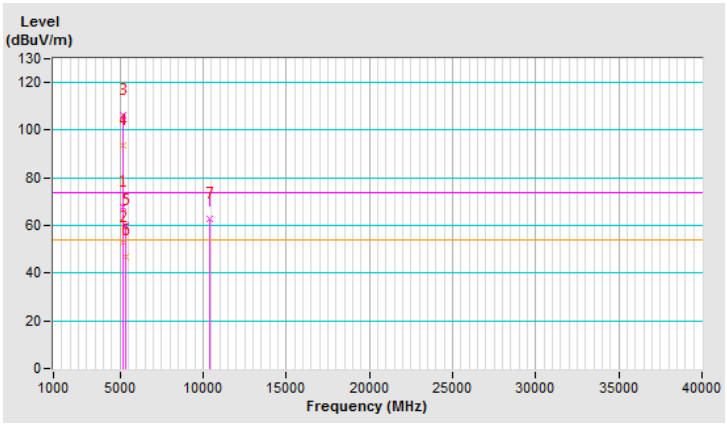


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA-MIMO
基 本 波 頻 率 ：	CH 42：5210 MHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=3kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 07 月 06 日	測 試 者 ：	張家誠

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	67.0 PK	74.0	-7.0	1.02 V	36	54.4	12.6
2	5150.00	53.0 AV	54.0	-1.0	1.02 V	36	40.4	12.6
3	*5210.00	106.8 PK			1.00 V	31	65.4	41.4
4	*5210.00	94.7 AV			1.00 V	31	53.3	41.4
5	5350.00	59.8 PK	74.0	-14.2	1.05 V	36	47.4	12.4
6	5350.00	47.1 AV	54.0	-6.9	1.05 V	36	34.7	12.4
7	#10420.00	62.3 PK	68.2	-5.9	1.63 V	322	39.5	22.8
8	15630.00	-	-	-	-	-	-	-
9	20840.00	-	-	-	-	-	-	-
10	#26050.00	-	-	-	-	-	-	-
11	31260.00	-	-	-	-	-	-	-
12	36470.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

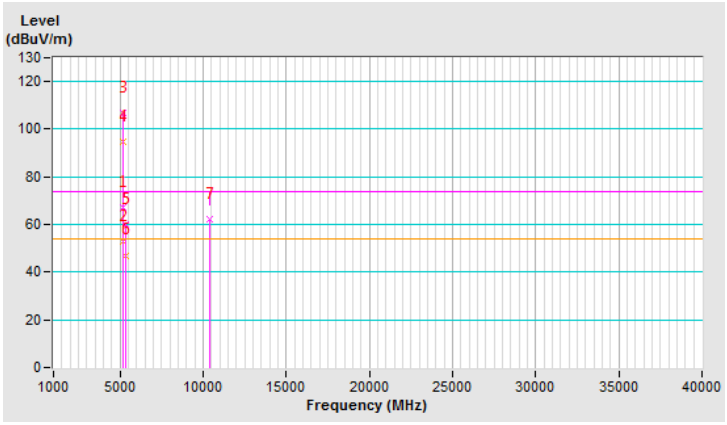


操作模式：	發射	調變技術：	OFDMA-MIMO
基本波頻率：	CH 155：5775 MHz	測試儀器：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=3kHz
量測場地溫度：	25℃	量測場地濕度：	67%RH
測試日期：	108 年 07 月 06 日	測試者：	張家誠

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5775.00	110.6 PK			1.00 H	44	68.0	42.6
2	*5775.00	98.6 AV			1.00 H	44	56.0	42.6
3	11550.00	64.1 PK	74.0	-9.9	3.22 H	263	40.2	23.9
4	11550.00	51.1 AV	54.0	-2.9	3.22 H	263	27.2	23.9
5	#17325.00	-	-	-	-	-	-	-
6	23100.00	-	-	-	-	-	-	-
7	#28875.00	-	-	-	-	-	-	-
8	#34650.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

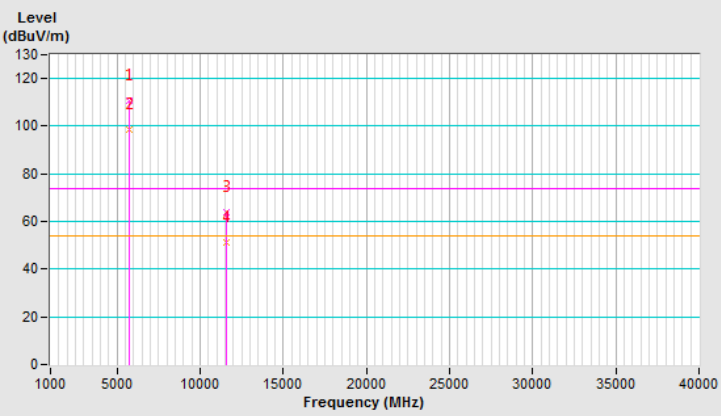


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA-MIMO
基 本 波 頻 率 ：	CH 155：5775 MHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=3kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	67%RH
測 試 日 期 ：	108 年 07 月 06 日	測 試 者 ：	張家誠

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5775.00	109.4 PK			1.00 V	24	66.8	42.6
2	*5775.00	96.9 AV			1.00 V	24	54.3	42.6
3	11550.00	62.6 PK	74.0	-11.4	2.22 V	321	38.7	23.9
4	11550.00	50.8 AV	54.0	-3.2	2.22 V	321	26.9	23.9
5	#17325.00	-	-	-	-	-	-	-
6	23100.00	-	-	-	-	-	-	-
7	#28875.00	-	-	-	-	-	-	-
8	#34650.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

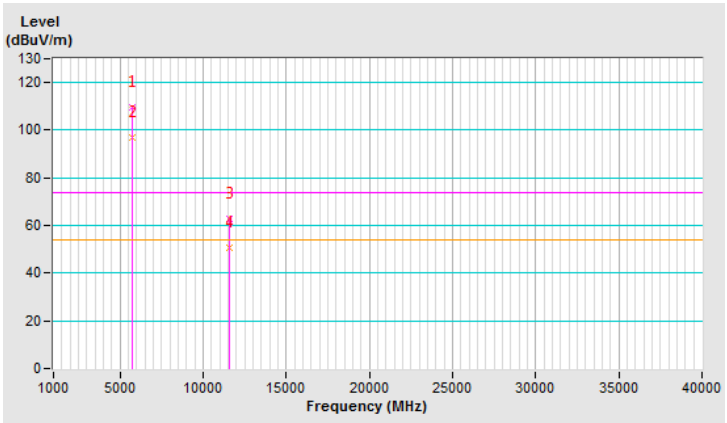


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA-MIMO
基 本 波 頻 率 ：	CH 155：5775 MHz (OOBE)	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=3kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	67%RH
測 試 日 期 ：	108 年 07 月 06 日	測 試 者 ：	張家誠

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5647.20	63.8 PK	68.2	-4.4	1.00 H	44	51.2	12.6
2	#5944.80	66.6 PK	68.2	-1.6	1.00 H	44	53.0	13.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

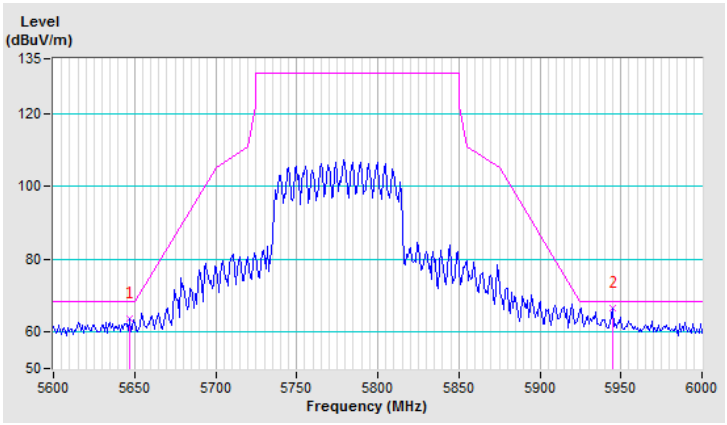


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA-MIMO
基 本 波 頻 率 ：	CH 155：5775 MHz (OOBE)	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=3kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	67%RH
測 試 日 期 ：	108 年 07 月 06 日	測 試 者 ：	張家誠

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5628.80	66.8 PK	68.2	-1.4	1.00 V	24	54.1	12.7
2	#5928.00	66.1 PK	68.2	-2.1	1.00 V	24	52.5	13.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

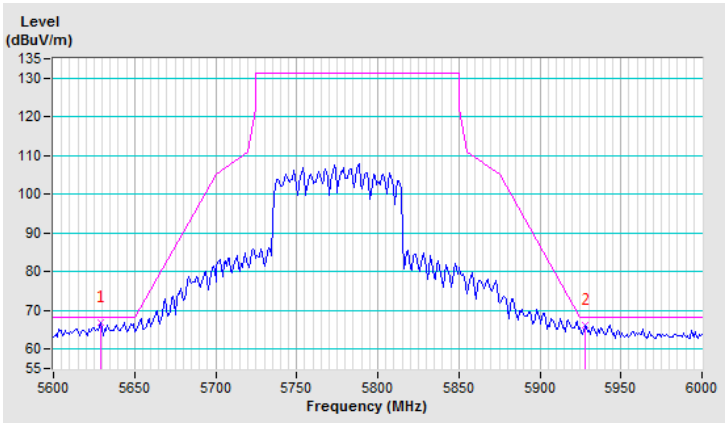

Test Mode M - AP43E (External antenna – PN: ATS-OP-245-810-4RPSP-36) + Eth7 Radio + POE

1TX


802.11a

操 作 模 式 ：	發射	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 36：5180 MHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 07 月 04 日	測 試 者 ：	張家誠

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	67.4 PK	74.0	-6.6	2.00 H	35	54.8	12.6
2	5150.00	52.4 AV	54.0	-1.6	2.00 H	35	39.8	12.6
3	*5180.00	112.3 PK			2.00 H	39	70.8	41.5
4	*5180.00	102.2 AV			2.00 H	39	60.7	41.5
5	#10360.00	62.7 PK	68.2	-5.5	3.09 H	311	40.2	22.5
6	15540.00	-	-	-	-	-	-	-
7	20720.00	-	-	-	-	-	-	-
8	#25900.00	-	-	-	-	-	-	-
9	#31080.00	-	-	-	-	-	-	-
10	#36260.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)..
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)..
3. Margin value = Emission Level – Limit value..
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

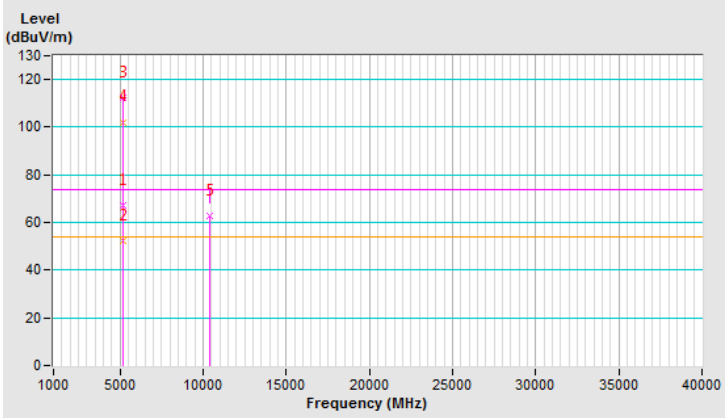


操作模式：	發射	調變技術：	OFDM
基本波頻率：	CH 36：5180 MHz	測試儀器：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量測場地溫度：	25℃	量測場地濕度：	70%RH
測試日期：	108 年 07 月 04 日	測試者：	張家誠

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	65.4 PK	74.0	-8.6	1.00 V	38	52.8	12.6
2	5150.00	50.4 AV	54.0	-3.6	1.00 V	38	37.8	12.6
3	*5180.00	110.3 PK			1.05 V	19	68.8	41.5
4	*5180.00	100.2 AV			1.05 V	19	58.7	41.5
5	#10360.00	62.4 PK	68.2	-5.8	2.18 V	211	39.9	22.5
6	15540.00	-	-	-	-	-	-	-
7	20720.00	-	-	-	-	-	-	-
8	#25900.00	-	-	-	-	-	-	-
9	#31080.00	-	-	-	-	-	-	-
10	#36260.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)..
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)..
3. Margin value = Emission Level – Limit value..
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

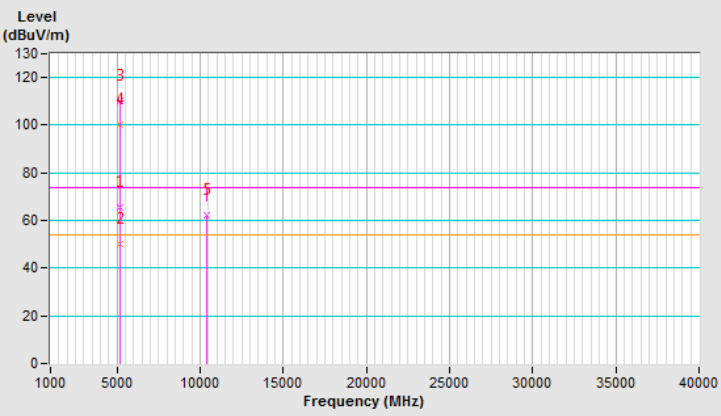


操 作 模 式 ：	發射	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 40：5200 MHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 07 月 04 日	測 試 者 ：	張家誠

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5200.00	114.5 PK			2.04 H	25	73.0	41.5
2	*5200.00	104.9 AV			2.04 H	25	63.4	41.5
3	#10400.00	62.8 PK	68.2	-5.4	2.11 H	218	39.9	22.9
4	15600.00	-	-	-	-	-	-	-
5	20800.00	-	-	-	-	-	-	-
6	#26000.00	-	-	-	-	-	-	-
7	31200.00	-	-	-	-	-	-	-
8	#36400.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)..
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)..
3. Margin value = Emission Level – Limit value..
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

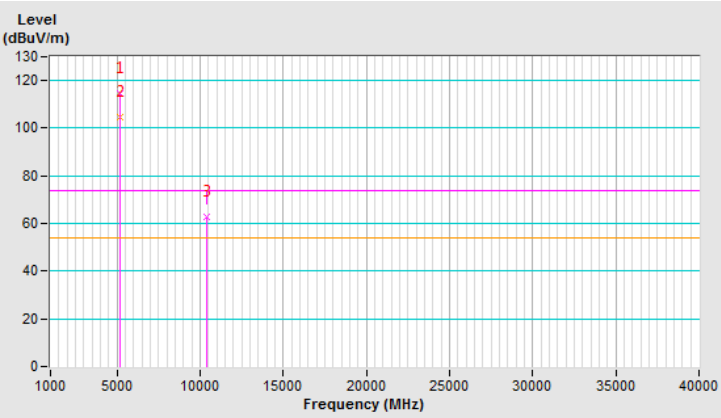


操作模式：	發射	調變技術：	OFDM
基本波頻率：	CH 40：5200 MHz	測試儀器：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量測場地溫度：	25℃	量測場地濕度：	70%RH
測試日期：	108 年 07 月 04 日	測試者：	張家誠

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5200.00	112.5 PK			1.40 V	40	71.0	41.5
2	*5200.00	103.9 AV			1.40 V	40	62.4	41.5
3	#10400.00	62.4 PK	68.2	-5.8	2.33 V	245	39.5	22.9
4	15600.00	-	-	-	-	-	-	-
5	20800.00	-	-	-	-	-	-	-
6	#26000.00	-	-	-	-	-	-	-
7	31200.00	-	-	-	-	-	-	-
8	#36400.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)..
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)..
3. Margin value = Emission Level – Limit value..
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

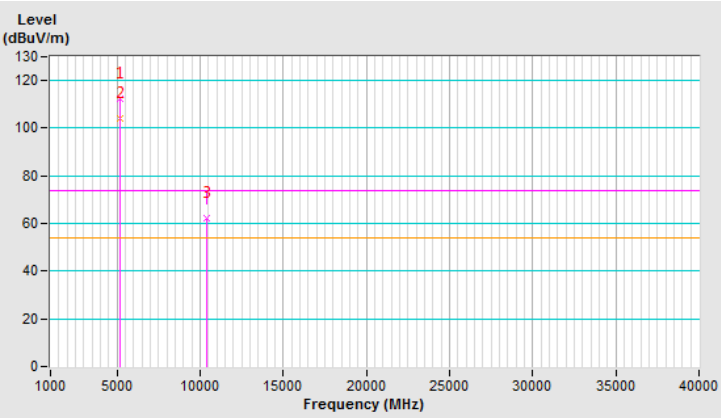


操 作 模 式 ：	發射	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 48：5240 MHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 07 月 04 日	測 試 者 ：	張家誠

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5240.00	113.9 PK			1.96 H	25	72.7	41.2
2	*5240.00	104.1 AV			1.96 H	25	62.9	41.2
3	5350.00	60.3 PK	74.0	-13.7	1.99 H	40	47.9	12.4
4	5350.00	47.3 AV	54.0	-6.7	1.99 H	40	34.9	12.4
5	#10480.00	62.5 PK	68.2	-5.7	2.99 H	215	39.7	22.8
6	15720.00	-	-	-	-	-	-	-
7	20960.00	-	-	-	-	-	-	-
8	#26200.00	-	-	-	-	-	-	-
9	31440.00	-	-	-	-	-	-	-
10	#36680.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)..
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)..
3. Margin value = Emission Level – Limit value..
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

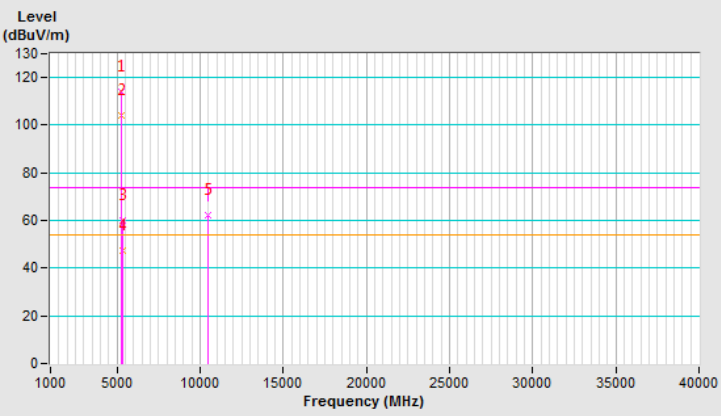


操 作 模 式 ：	發射	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 48：5240 MHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 07 月 04 日	測 試 者 ：	張家誠

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5240.00	111.9 PK			1.05 V	42	70.7	41.2
2	*5240.00	102.1 AV			1.05 V	42	60.9	41.2
3	5350.00	60.2 PK	74.0	-13.8	1.22 V	55	47.8	12.4
4	5350.00	47.2 AV	54.0	-6.8	1.22 V	55	34.8	12.4
5	#10480.00	62.2 PK	68.2	-6.0	2.88 V	105	39.4	22.8
6	15720.00	-	-	-	-	-	-	-
7	20960.00	-	-	-	-	-	-	-
8	#26200.00	-	-	-	-	-	-	-
9	31440.00	-	-	-	-	-	-	-
10	#36680.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)..
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)..
3. Margin value = Emission Level – Limit value..
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

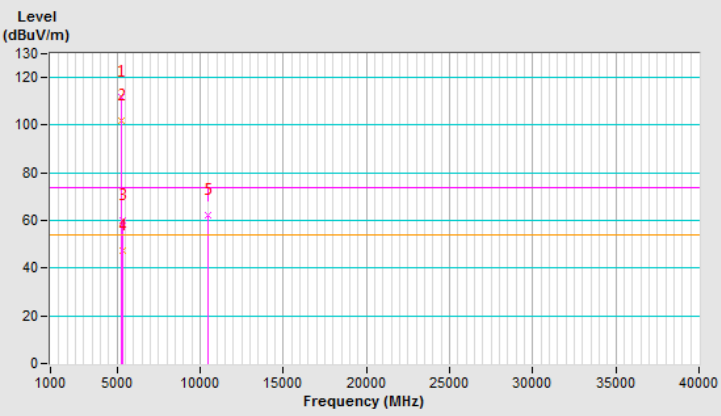


操 作 模 式 ：	發射	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 149：5745 MHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 07 月 04 日	測 試 者 ：	張家誠

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5745.00	113.8 PK			1.90 H	47	71.3	42.5
2	*5745.00	103.8 AV			1.90 H	47	61.3	42.5
3	11490.00	63.7 PK	74.0	-10.3	2.23 H	266	39.6	24.1
4	11490.00	50.9 AV	54.0	-3.1	2.23 H	266	26.8	24.1
5	#17235.00	-	-	-	-	-	-	-
6	22980.00	-	-	-	-	-	-	-
7	#28725.00	-	-	-	-	-	-	-
8	#34470.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)..
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)..
3. Margin value = Emission Level – Limit value..
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

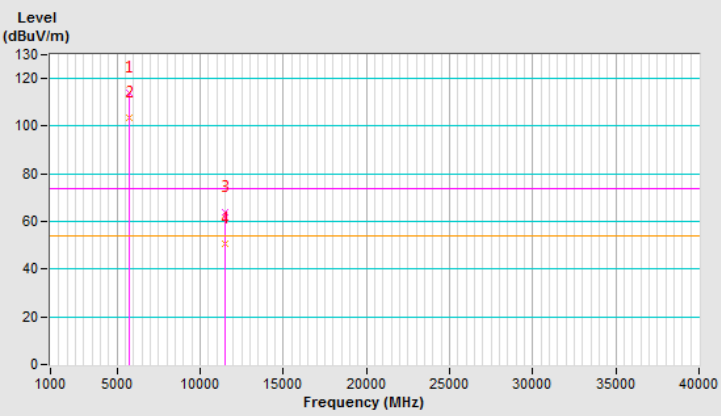


操 作 模 式 ：	發射	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 149：5745 MHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 07 月 05 日	測 試 者 ：	張家誠

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5745.00	111.8 PK			1.05 V	51	69.3	42.5
2	*5745.00	101.8 AV			1.05 V	51	59.3	42.5
3	11490.00	63.3 PK	74.0	-10.7	2.11 V	159	39.2	24.1
4	11490.00	50.8 AV	54.0	-3.2	2.11 V	159	26.7	24.1
5	#17235.00	-	-	-	-	-	-	-
6	22980.00	-	-	-	-	-	-	-
7	#28725.00	-	-	-	-	-	-	-
8	#34470.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)..
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)..
3. Margin value = Emission Level – Limit value..
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

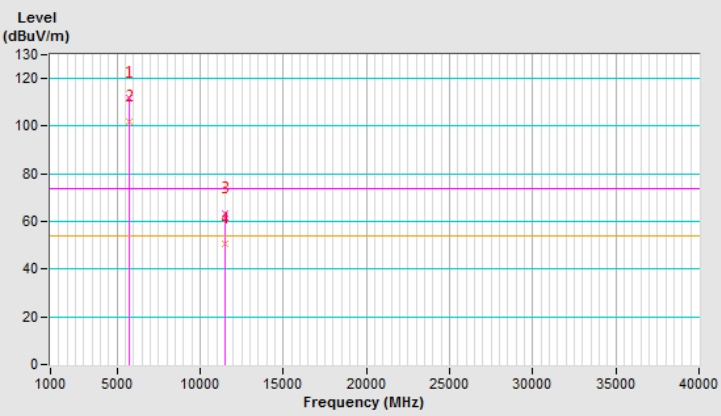


操 作 模 式 ：	發射	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 149：5745 MHz (OOBE)	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 07 月 04 日	測 試 者 ：	張家誠

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5633.60	62.7 PK	68.2	-5.5	1.90 H	47	50.0	12.7
2	#5994.40	64.2 PK	68.2	-4.0	1.90 H	47	50.4	13.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)..
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)..
3. Margin value = Emission Level – Limit value..
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

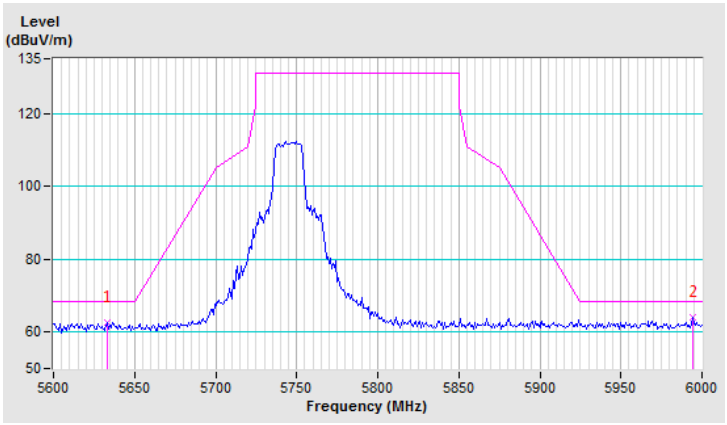


操 作 模 式 ：	發射	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 149：5745 MHz (OOBE)	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 07 月 05 日	測 試 者 ：	張家誠

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5624.80	63.8 PK	68.2	-4.4	1.05 V	51	51.1	12.7
2	#5957.60	63.2 PK	68.2	-5.0	1.05 V	51	49.6	13.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)..
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)..
3. Margin value = Emission Level – Limit value..
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

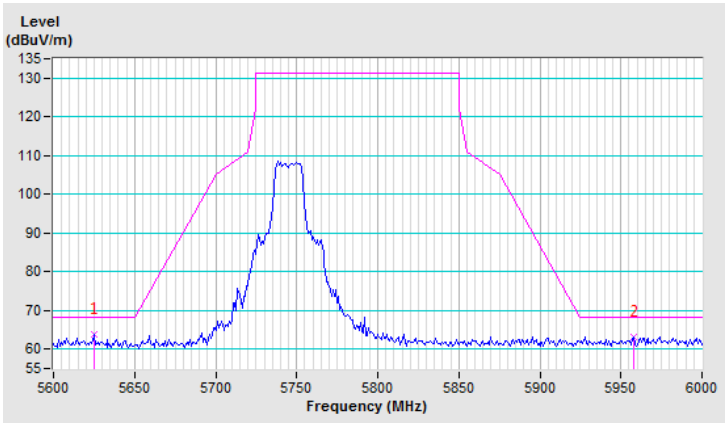


操 作 模 式 ：	發射	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 157：5785 MHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 07 月 04 日	測 試 者 ：	張家誠

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5785.00	114.1 PK			2.16 H	24	71.5	42.6
2	*5785.00	103.9 AV			2.16 H	24	61.3	42.6
3	11570.00	63.6 PK	74.0	-10.4	2.99 H	201	39.6	24.0
4	11570.00	50.7 AV	54.0	-3.3	2.99 H	201	26.7	24.0
5	#17355.00	-	-	-	-	-	-	-
6	#23140.00	-	-	-	-	-	-	-
7	#28925.00	-	-	-	-	-	-	-
8	#34710.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)..
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)..
3. Margin value = Emission Level – Limit value..
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

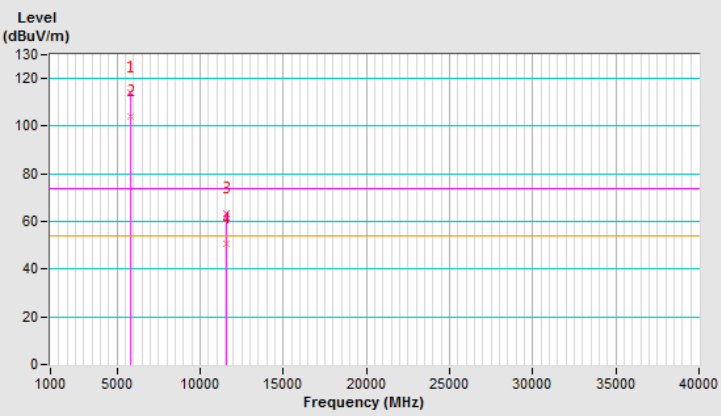


操作模式：	發射	調變技術：	OFDM
基本波頻率：	CH 157：5785 MHz	測試儀器：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量測場地溫度：	25℃	量測場地濕度：	70%RH
測試日期：	108 年 07 月 05 日	測試者：	張家誠

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5785.00	112.1 PK			2.01 V	59	69.5	42.6
2	*5785.00	111.9 AV			2.01 V	59	69.3	42.6
3	11570.00	63.5 PK	74.0	-10.5	2.11 V	185	39.5	24.0
4	11570.00	50.5 AV	54.0	-3.5	2.11 V	185	26.5	24.0
5	#17355.00	-	-	-	-	-	-	-
6	#23140.00	-	-	-	-	-	-	-
7	#28925.00	-	-	-	-	-	-	-
8	#34710.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)..
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)..
3. Margin value = Emission Level – Limit value..
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

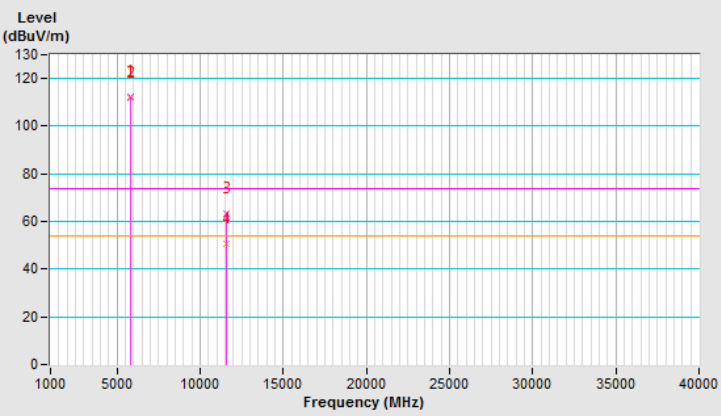


操 作 模 式 ：	發射	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 157：5785 MHz (OOBE)	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 07 月 04 日	測 試 者 ：	張家誠

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5607.20	63.2 PK	68.2	-5.0	2.16 H	24	50.5	12.7
2	#5969.60	63.9 PK	68.2	-4.3	2.16 H	24	50.2	13.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)..
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)..
3. Margin value = Emission Level – Limit value..
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

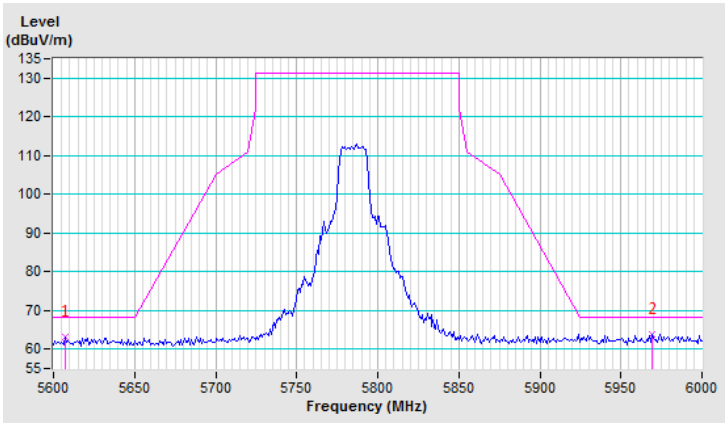


操 作 模 式 ：	發射	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 157：5785 MHz (OOBE)	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 07 月 05 日	測 試 者 ：	張家誠

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5625.60	63.5 PK	68.2	-4.7	2.01 V	59	50.8	12.7
2	#5950.40	63.7 PK	68.2	-4.5	2.01 V	59	50.1	13.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)..
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)..
3. Margin value = Emission Level – Limit value..
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

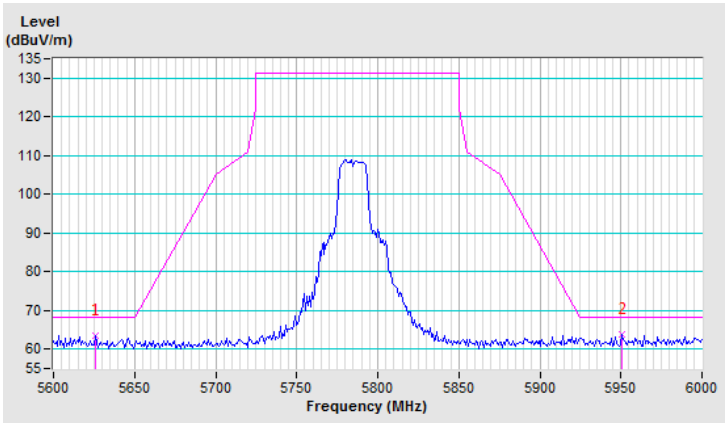


操 作 模 式 ：	發射	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 165：5825 MHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 07 月 04 日	測 試 者 ：	張家誠

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5825.00	113.9 PK			2.25 H	26	71.3	42.6
2	*5825.00	103.8 AV			2.25 H	26	61.2	42.6
3	11650.00	63.5 PK	74.0	-10.5	2.99 H	201	39.9	23.6
4	11650.00	50.2 AV	54.0	-3.8	2.99 H	201	26.6	23.6
5	#17475.00	-	-	-	-	-	-	-
6	#23300.00	-	-	-	-	-	-	-
7	#29125.00	-	-	-	-	-	-	-
8	#34950.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)..
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)..
3. Margin value = Emission Level – Limit value..
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

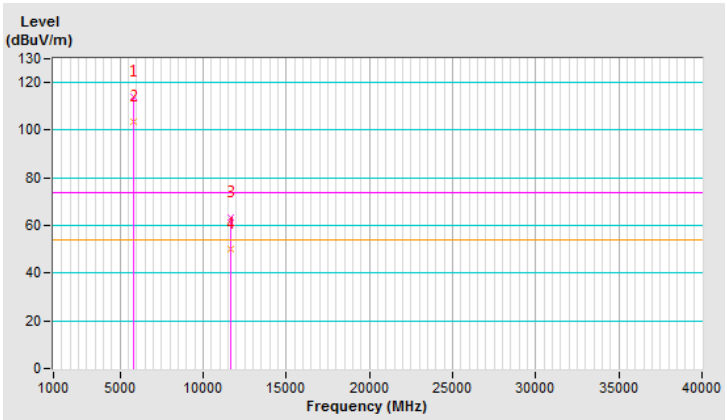


操 作 模 式 ：	發射	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 165：5825 MHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 07 月 05 日	測 試 者 ：	張家誠

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5825.00	111.9 PK			2.15 V	50	69.3	42.6
2	*5825.00	101.8 AV			2.15 V	50	59.2	42.6
3	11650.00	63.3 PK	74.0	-10.7	2.96 V	321	39.7	23.6
4	11650.00	50.0 AV	54.0	-4.0	2.96 V	321	26.4	23.6
5	#17475.00	-	-	-	-	-	-	-
6	#23300.00	-	-	-	-	-	-	-
7	#29125.00	-	-	-	-	-	-	-
8	#34950.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)..
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)..
3. Margin value = Emission Level – Limit value..
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

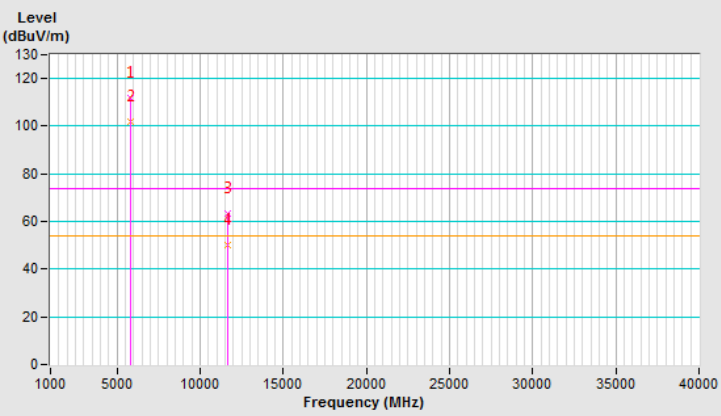


操 作 模 式 ：	發射	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 165：5825 MHz (OOBE)	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 07 月 04 日	測 試 者 ：	張家誠

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5608.00	63.2 PK	68.2	-5.0	2.25 H	26	50.5	12.7
2	#5932.00	63.9 PK	68.2	-4.3	2.25 H	26	50.3	13.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)..
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)..
3. Margin value = Emission Level – Limit value..
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

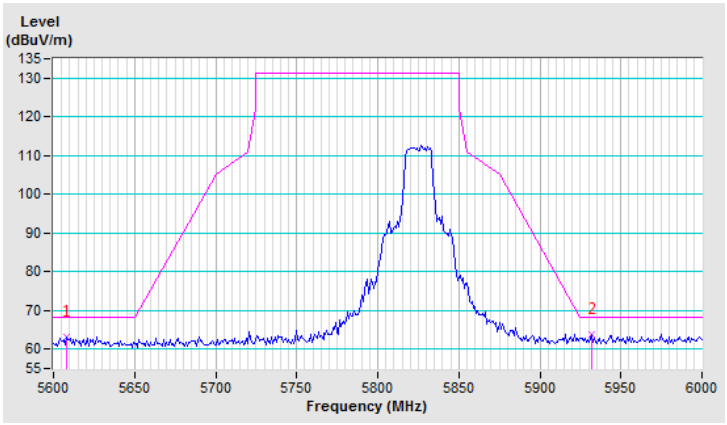


操 作 模 式 ：	發射	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 165：5825 MHz (OOBE)	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 07 月 05 日	測 試 者 ：	張家誠

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5624.80	63.9 PK	68.2	-4.3	2.15 V	50	51.2	12.7
2	#5994.40	65.0 PK	68.2	-3.2	2.15 V	50	51.2	13.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)..
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)..
3. Margin value = Emission Level – Limit value..
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

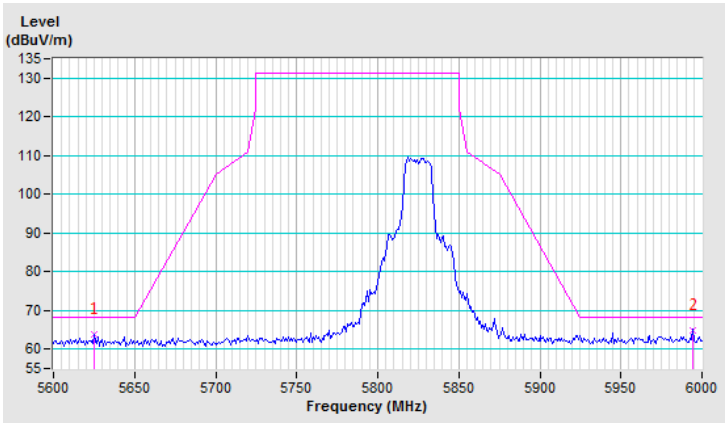


802.11ax (HE20)

操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 36：5180 MHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 07 月 04 日	測 試 者 ：	張家誠

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	71.3 PK	74.0	-2.7	2.00 H	39	58.7	12.6
2	5150.00	52.4 AV	54.0	-1.6	2.00 H	39	39.8	12.6
3	*5180.00	113.3 PK			2.09 H	35	71.8	41.5
4	*5180.00	100.2 AV			2.09 H	35	58.7	41.5
5	#10360.00	62.2 PK	68.2	-6.0	2.33 H	309	39.7	22.5
6	15540.00	-	-	-	-	-	-	-
7	20720.00	-	-	-	-	-	-	-
8	#25900.00	-	-	-	-	-	-	-
9	#31080.00	-	-	-	-	-	-	-
10	#36260.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)..
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)..
3. Margin value = Emission Level – Limit value..
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

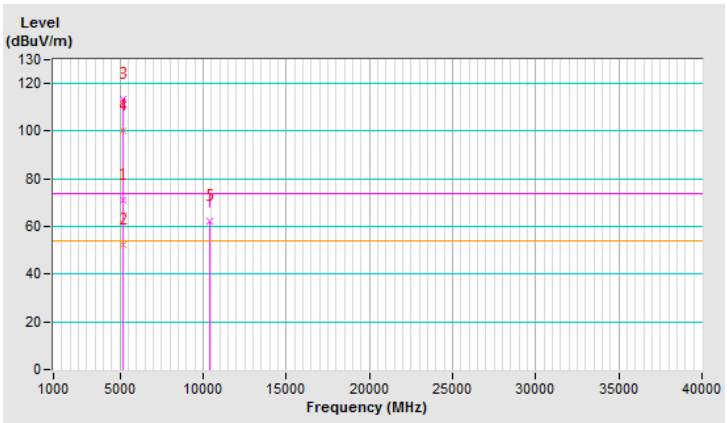


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 36：5180 MHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 07 月 04 日	測 試 者 ：	張家誠

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	68.3 PK	74.0	-5.7	1.09 V	39	55.7	12.6
2	5150.00	50.5 AV	54.0	-3.5	1.09 V	39	37.9	12.6
3	*5180.00	111.3 PK			1.09 V	41	69.8	41.5
4	*5180.00	98.2 AV			1.09 V	41	56.7	41.5
5	#10360.00	62.0 PK	68.2	-6.2	2.09 V	230	39.5	22.5
6	15540.00	-	-	-	-	-	-	-
7	20720.00	-	-	-	-	-	-	-
8	#25900.00	-	-	-	-	-	-	-
9	#31080.00	-	-	-	-	-	-	-
10	#36260.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)..
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)..
3. Margin value = Emission Level – Limit value..
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

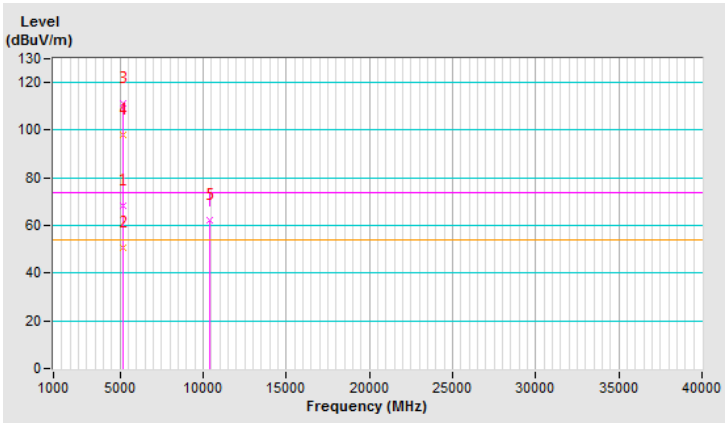


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 40：5200 MHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 07 月 04 日	測 試 者 ：	張家誠

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5200.00	117.1 PK			2.20 H	26	75.6	41.5
2	*5200.00	104.2 AV			2.20 H	26	62.7	41.5
3	#10400.00	62.7 PK	68.2	-5.5	2.99 H	233	39.8	22.9
4	15600.00	-	-	-	-	-	-	-
5	20800.00	-	-	-	-	-	-	-
6	#26000.00	-	-	-	-	-	-	-
7	31200.00	-	-	-	-	-	-	-
8	#36400.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)..
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)..
3. Margin value = Emission Level – Limit value..
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

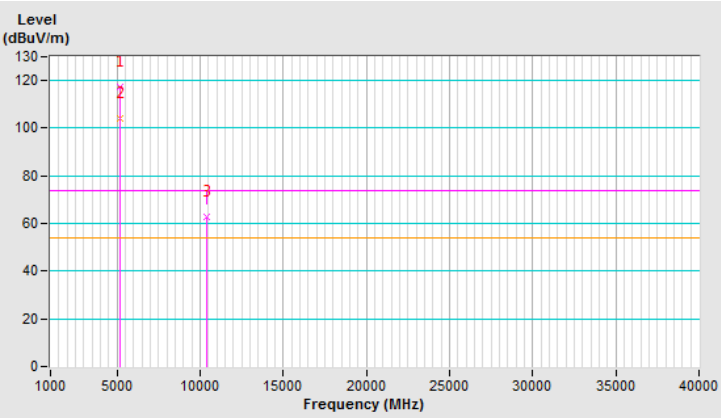


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 40：5200 MHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 07 月 04 日	測 試 者 ：	張家誠

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5200.00	115.1 PK			1.09 V	48	73.6	41.5
2	*5200.00	102.2 AV			1.09 V	48	60.7	41.5
3	#10400.00	62.3 PK	68.2	-5.9	2.96 V	152	39.4	22.9
4	15600.00	-	-	-	-	-	-	-
5	20800.00	-	-	-	-	-	-	-
6	#26000.00	-	-	-	-	-	-	-
7	31200.00	-	-	-	-	-	-	-
8	#36400.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)..
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)..
3. Margin value = Emission Level – Limit value..
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

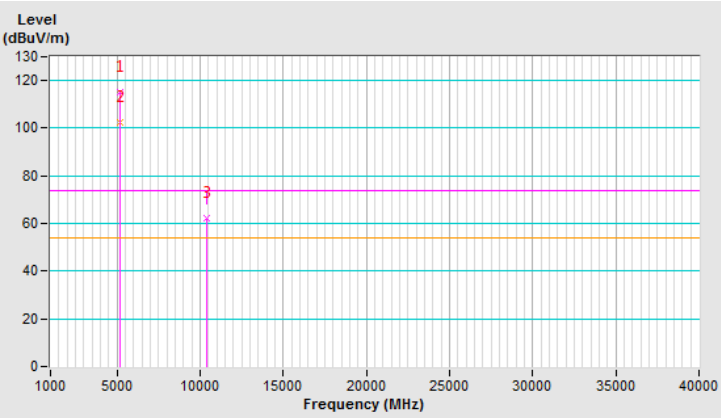


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 48：5240 MHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 07 月 04 日	測 試 者 ：	張家誠

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5240.00	117.1 PK			2.45 H	27	75.9	41.2
2	*5240.00	103.6 AV			2.45 H	27	62.4	41.2
3	5350.00	60.4 PK	74.0	-13.6	2.40 H	21	48.0	12.4
4	5350.00	47.3 AV	54.0	-6.7	2.40 H	21	34.9	12.4
5	#10480.00	62.8 PK	68.2	-5.4	3.11 H	349	40.0	22.8
6	15720.00	-	-	-	-	-	-	-
7	20960.00	-	-	-	-	-	-	-
8	#26200.00	-	-	-	-	-	-	-
9	31440.00	-	-	-	-	-	-	-
10	#36680.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)..
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)..
3. Margin value = Emission Level – Limit value..
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

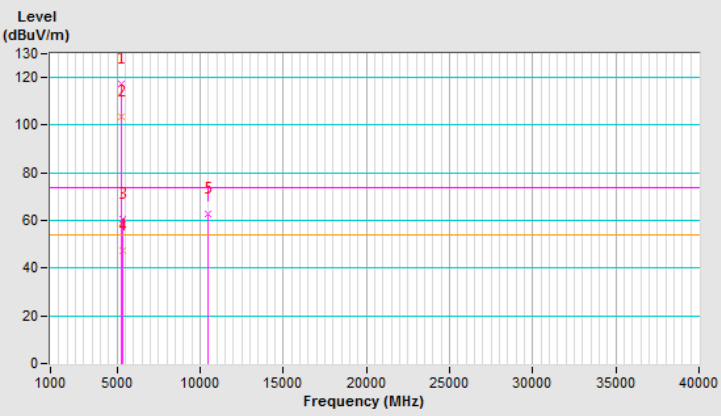


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 48：5240 MHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 07 月 04 日	測 試 者 ：	張家誠

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5240.00	115.1 PK			1.05 V	39	73.9	41.2
2	*5240.00	101.6 AV			1.05 V	39	60.4	41.2
3	5350.00	60.3 PK	74.0	-13.7	1.08 V	41	47.9	12.4
4	5350.00	47.1 AV	54.0	-6.9	1.08 V	41	34.7	12.4
5	#10480.00	62.6 PK	68.2	-5.6	2.88 V	244	39.8	22.8
6	15720.00	-	-	-	-	-	-	-
7	20960.00	-	-	-	-	-	-	-
8	#26200.00	-	-	-	-	-	-	-
9	31440.00	-	-	-	-	-	-	-
10	#36680.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)..
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)..
3. Margin value = Emission Level – Limit value..
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

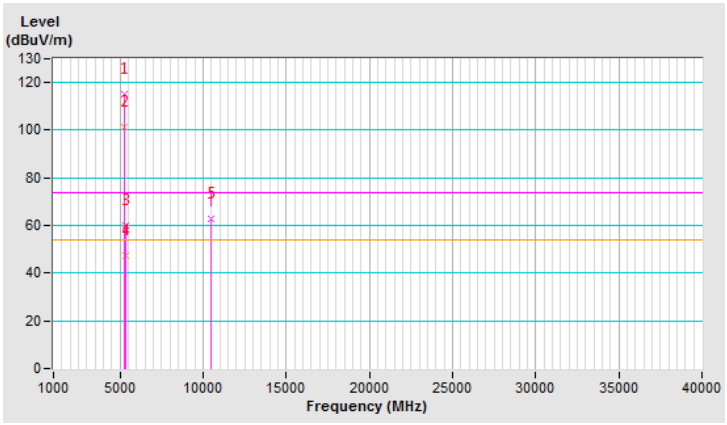


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 149：5745 MHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 07 月 04 日	測 試 者 ：	張家誠

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5745.00	117.4 PK			1.73 H	23	74.9	42.5
2	*5745.00	104.6 AV			1.73 H	23	62.1	42.5
3	11490.00	63.1 PK	74.0	-10.9	2.88 H	211	39.0	24.1
4	11490.00	50.9 AV	54.0	-3.1	2.88 H	211	26.8	24.1
5	#17235.00	-	-	-	-	-	-	-
6	22980.00	-	-	-	-	-	-	-
7	#28725.00	-	-	-	-	-	-	-
8	#34470.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)..
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)..
3. Margin value = Emission Level – Limit value..
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

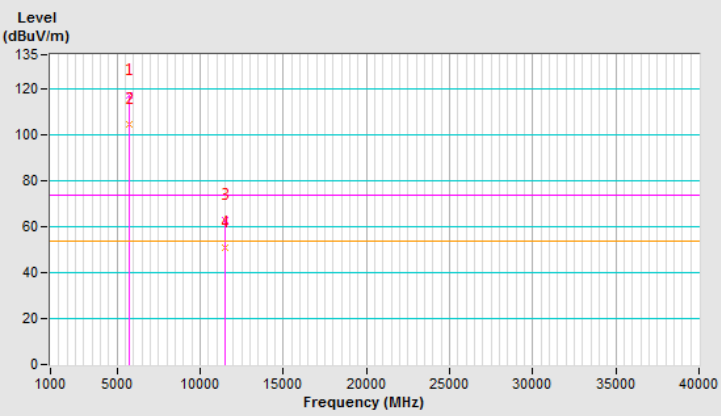


操作模式：	發射	調變技術：	OFDMA
基本波頻率：	CH 149：5745 MHz	測試儀器：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量測場地溫度：	25℃	量測場地濕度：	70%RH
測試日期：	108 年 07 月 05 日	測試者：	張家誠

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5745.00	115.4 PK			2.55 V	51	72.9	42.5
2	*5745.00	102.6 AV			2.55 V	51	60.1	42.5
3	11490.00	62.9 PK	74.0	-11.1	3.33 V	355	38.8	24.1
4	11490.00	50.6 AV	54.0	-3.4	3.33 V	355	26.5	24.1
5	#17235.00	-	-	-	-	-	-	-
6	22980.00	-	-	-	-	-	-	-
7	#28725.00	-	-	-	-	-	-	-
8	#34470.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)..
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)..
3. Margin value = Emission Level – Limit value..
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

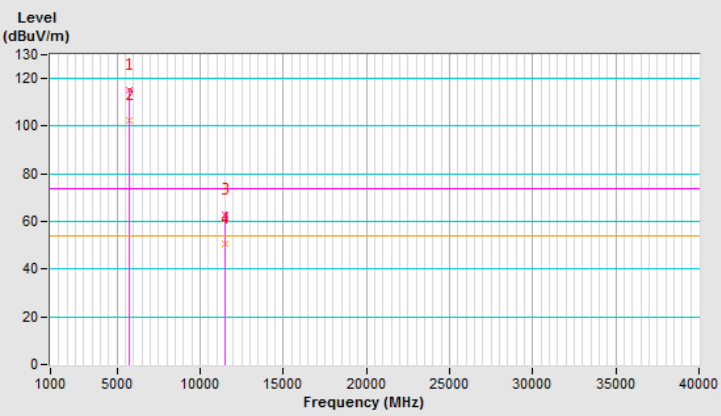


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 149：5745 MHz (OOBE)	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 07 月 04 日	測 試 者 ：	張家誠

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5620.80	63.9 PK	68.2	-4.3	1.73 H	23	51.2	12.7
2	#5941.60	64.2 PK	68.2	-4.0	1.73 H	23	50.6	13.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)..
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)..
3. Margin value = Emission Level – Limit value..
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

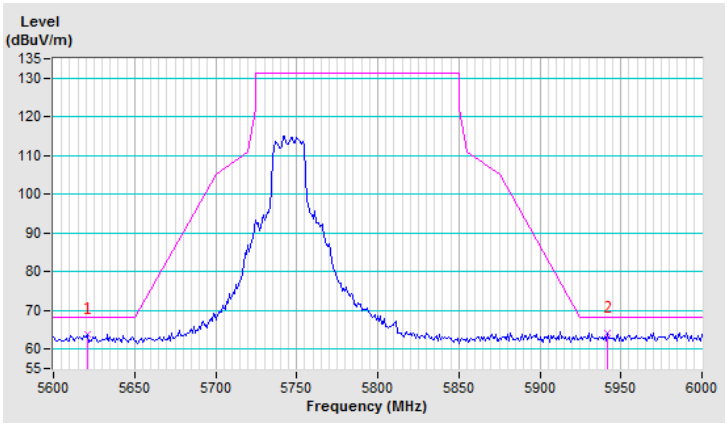


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 149：5745 MHz (OOBE)	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 07 月 05 日	測 試 者 ：	張家誠

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5637.60	64.1 PK	68.2	-4.1	2.55 V	51	51.4	12.7
2	#5951.20	63.9 PK	68.2	-4.3	2.55 V	51	50.3	13.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)..
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)..
3. Margin value = Emission Level – Limit value..
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

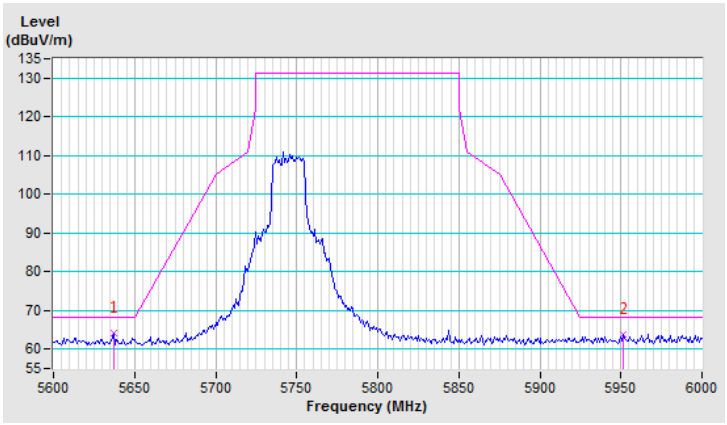


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 157：5785 MHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 07 月 04 日	測 試 者 ：	張家誠

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5785.00	117.1 PK			1.77 H	52	74.5	42.6
2	*5785.00	103.7 AV			1.77 H	52	61.1	42.6
3	11570.00	62.7 PK	74.0	-11.3	2.18 H	202	38.7	24.0
4	11570.00	50.8 AV	54.0	-3.2	2.18 H	202	26.8	24.0
5	#17355.00	-	-	-	-	-	-	-
6	#23140.00	-	-	-	-	-	-	-
7	#28925.00	-	-	-	-	-	-	-
8	#34710.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)..
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)..
3. Margin value = Emission Level – Limit value..
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

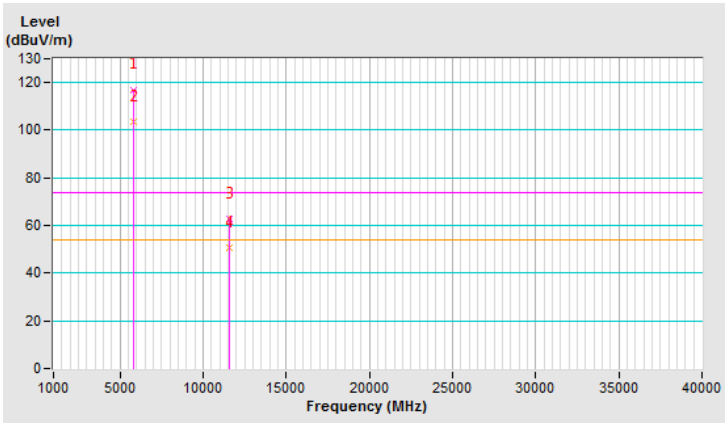


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 157：5785 MHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 07 月 05 日	測 試 者 ：	張家誠

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5785.00	115.1 PK			1.85 V	55	72.5	42.6
2	*5785.00	101.7 AV			1.85 V	55	59.1	42.6
3	11570.00	62.6 PK	74.0	-11.4	2.99 V	263	38.6	24.0
4	11570.00	50.5 AV	54.0	-3.5	2.99 V	263	26.5	24.0
5	#17355.00	-	-	-	-	-	-	-
6	#23140.00	-	-	-	-	-	-	-
7	#28925.00	-	-	-	-	-	-	-
8	#34710.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)..
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)..
3. Margin value = Emission Level – Limit value..
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

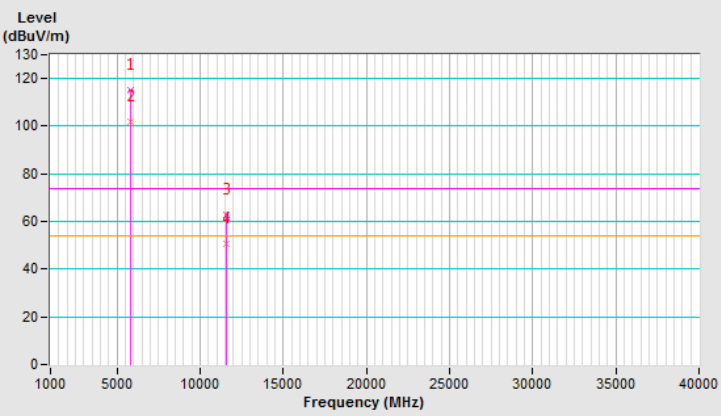


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 157：5785 MHz (OOBE)	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 07 月 04 日	測 試 者 ：	張家誠

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5620.00	63.1 PK	68.2	-5.1	1.77 H	52	50.4	12.7
2	#5956.80	64.2 PK	68.2	-4.0	1.77 H	52	50.6	13.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)..
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)..
3. Margin value = Emission Level – Limit value..
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

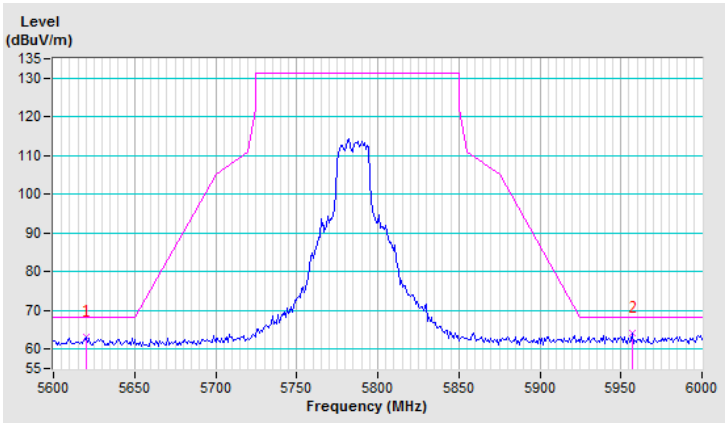


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 157：5785 MHz (OOBE)	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 07 月 05 日	測 試 者 ：	張家誠

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5619.20	63.4 PK	68.2	-4.8	1.85 V	55	50.7	12.7
2	#5946.40	63.6 PK	68.2	-4.6	1.85 V	55	50.0	13.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)..
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)..
3. Margin value = Emission Level – Limit value..
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

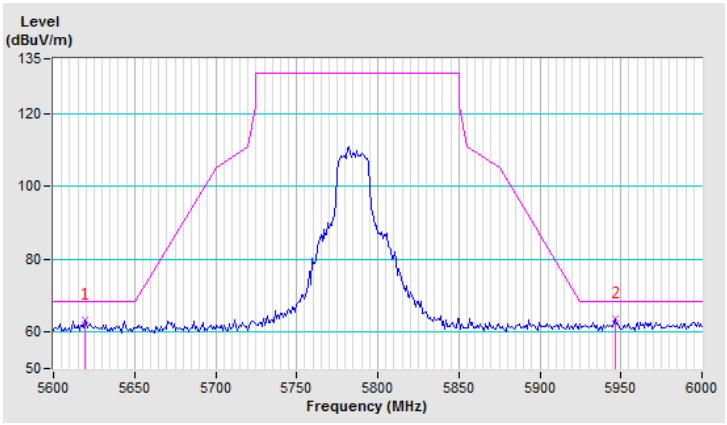


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 165：5825 MHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 07 月 04 日	測 試 者 ：	張家誠

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5825.00	116.6 PK			2.02 H	24	74.0	42.6
2	*5825.00	103.6 AV			2.02 H	24	61.0	42.6
3	11650.00	62.8 PK	74.0	-11.2	2.55 H	211	39.2	23.6
4	11650.00	50.5 AV	54.0	-3.5	2.55 H	211	26.9	23.6
5	#17475.00	-	-	-	-	-	-	-
6	#23300.00	-	-	-	-	-	-	-
7	#29125.00	-	-	-	-	-	-	-
8	#34950.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)..
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)..
3. Margin value = Emission Level – Limit value..
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

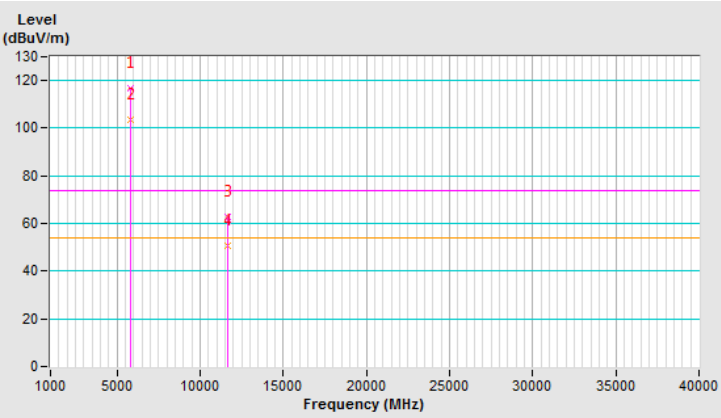


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 165：5825 MHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 07 月 05 日	測 試 者 ：	張家誠

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5825.00	114.6 PK			2.00 V	50	72.0	42.6
2	*5825.00	101.6 AV			2.00 V	50	59.0	42.6
3	11650.00	62.5 PK	74.0	-11.5	2.01 V	188	38.9	23.6
4	11650.00	50.4 AV	54.0	-3.6	2.01 V	188	26.8	23.6
5	#17475.00	-	-	-	-	-	-	-
6	#23300.00	-	-	-	-	-	-	-
7	#29125.00	-	-	-	-	-	-	-
8	#34950.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)..
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)..
3. Margin value = Emission Level – Limit value..
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

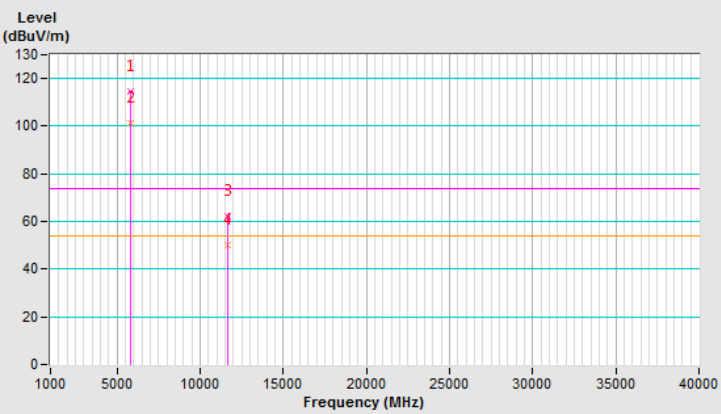


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 165：5825 MHz (OOBE)	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 07 月 04 日	測 試 者 ：	張家誠

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5645.60	63.4 PK	68.2	-4.8	2.02 H	24	50.8	12.6
2	#5988.00	63.8 PK	68.2	-4.4	2.02 H	24	50.0	13.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)..
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)..
3. Margin value = Emission Level – Limit value..
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

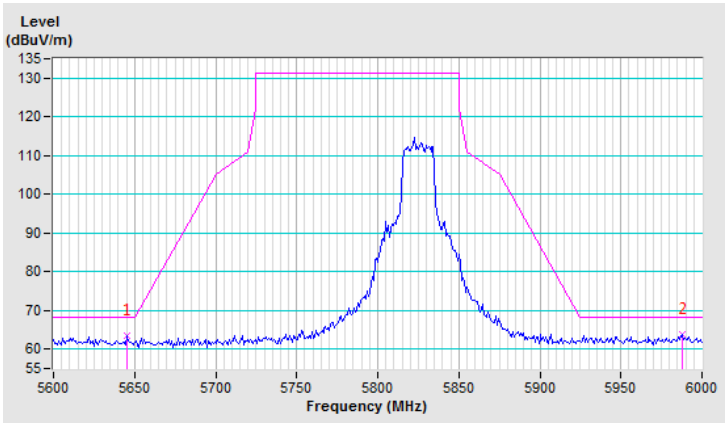


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 165：5825 MHz (OOBE)	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 07 月 05 日	測 試 者 ：	張家誠

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5611.20	62.5 PK	68.2	-5.7	2.00 V	50	49.8	12.7
2	#5960.00	63.6 PK	68.2	-4.6	2.00 V	50	49.9	13.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)..
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)..
3. Margin value = Emission Level – Limit value..
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

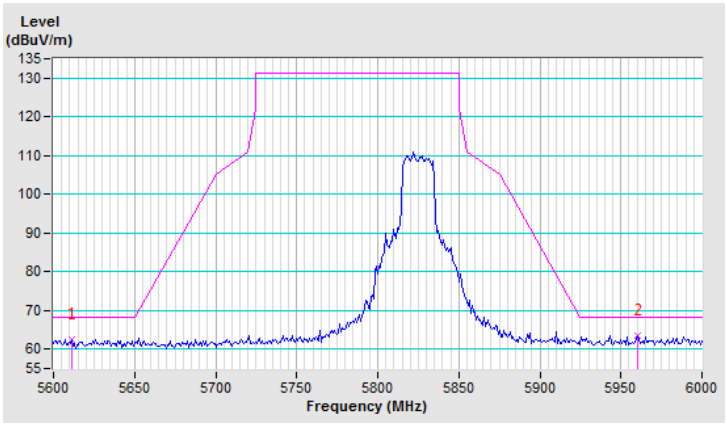


802.11ax (HE40)

操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 38：5190 MHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=3kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 07 月 04 日	測 試 者 ：	張家誠

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	68.9 PK	74.0	-5.1	2.40 H	25	56.3	12.6
2	5150.00	52.4 AV	54.0	-1.6	2.40 H	25	39.8	12.6
3	*5190.00	110.1 PK			2.41 H	24	68.6	41.5
4	*5190.00	97.2 AV			2.41 H	24	55.7	41.5
5	#10380.00	62.4 PK	68.2	-5.8	1.88 H	211	39.7	22.7
6	15570.00	-	-	-	-	-	-	-
7	20760.00	-	-	-	-	-	-	-
8	#25950.00	-	-	-	-	-	-	-
9	#31140.00	-	-	-	-	-	-	-
10	#36330.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)..
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)..
3. Margin value = Emission Level – Limit value..
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

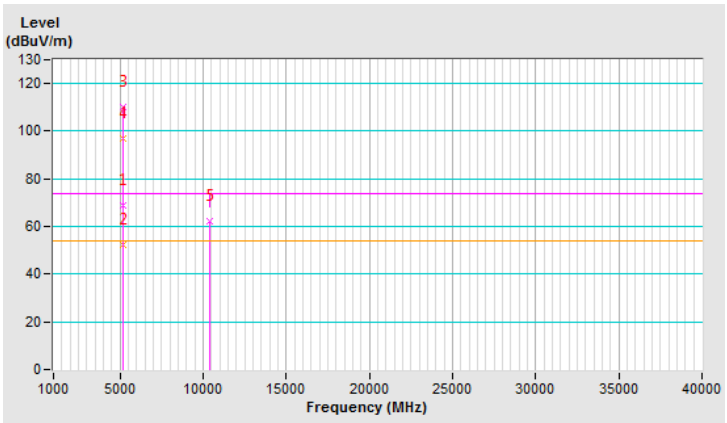


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 38：5190 MHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=3kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 07 月 04 日	測 試 者 ：	張家誠

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	66.9 PK	74.0	-7.1	1.05 V	50	54.3	12.6
2	5150.00	50.8 AV	54.0	-3.2	1.05 V	50	38.2	12.6
3	*5190.00	107.1 PK			1.00 V	40	65.6	41.5
4	*5190.00	94.2 AV			1.00 V	40	52.7	41.5
5	#10380.00	62.3 PK	68.2	-5.9	3.09 V	322	39.6	22.7
6	15570.00	-	-	-	-	-	-	-
7	20760.00	-	-	-	-	-	-	-
8	#25950.00	-	-	-	-	-	-	-
9	#31140.00	-	-	-	-	-	-	-
10	#36330.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)..
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)..
3. Margin value = Emission Level – Limit value..
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

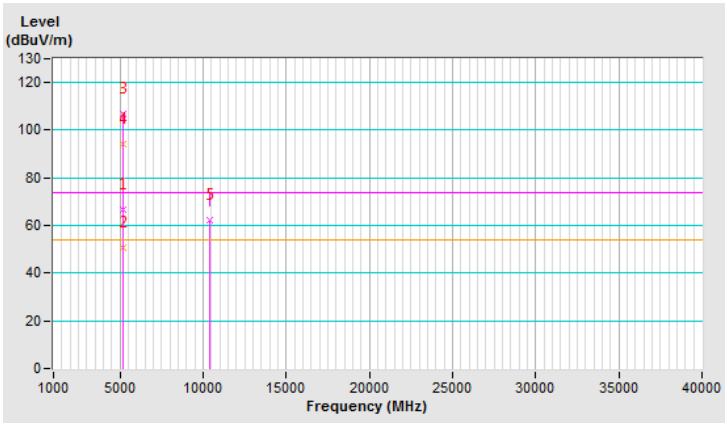


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 46：5230 MHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=3kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 07 月 04 日	測 試 者 ：	張家誠

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	65.5 PK	74.0	-8.5	2.41 H	25	52.9	12.6
2	5150.00	51.6 AV	54.0	-2.4	2.41 H	25	39.0	12.6
3	*5230.00	113.9 PK			2.41 H	33	72.6	41.3
4	*5230.00	100.6 AV			2.41 H	33	59.3	41.3
5	#10460.00	62.5 PK	68.2	-5.7	4.00 H	299	39.6	22.9
6	15690.00	-	-	-	-	-	-	-
7	20920.00	-	-	-	-	-	-	-
8	#26150.00	-	-	-	-	-	-	-
9	31380.00	-	-	-	-	-	-	-
10	#36610.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)..
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)..
3. Margin value = Emission Level – Limit value..
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

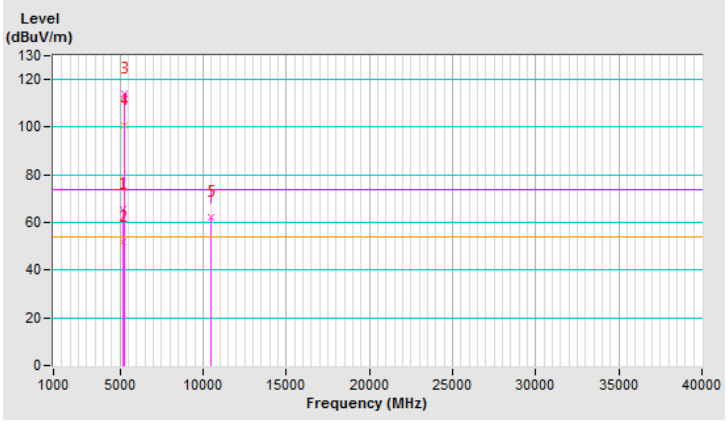


操作模式：	發射	調變技術：	OFDMA
基本波頻率：	CH 46：5230 MHz	測試儀器：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=3kHz
量測場地溫度：	25℃	量測場地濕度：	70%RH
測試日期：	108 年 07 月 04 日	測試者：	張家誠

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	63.5 PK	74.0	-10.5	1.09 V	21	50.9	12.6
2	5150.00	50.5 AV	54.0	-3.5	1.09 V	21	37.9	12.6
3	*5230.00	111.9 PK			1.09 V	44	70.6	41.3
4	*5230.00	98.6 AV			1.09 V	44	57.3	41.3
5	#10460.00	62.0 PK	68.2	-6.2	2.18 V	200	39.1	22.9
6	15690.00	-	-	-	-	-	-	-
7	20920.00	-	-	-	-	-	-	-
8	#26150.00	-	-	-	-	-	-	-
9	31380.00	-	-	-	-	-	-	-
10	#36610.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)..
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)..
3. Margin value = Emission Level – Limit value..
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

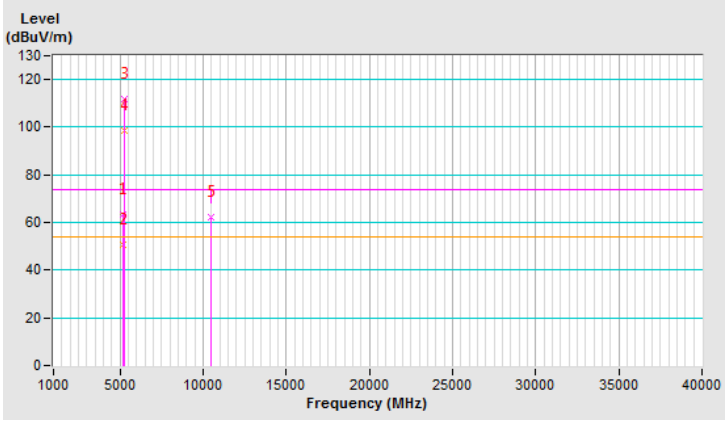


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 151：5755 MHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=3kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 07 月 04 日	測 試 者 ：	張家誠

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5755.00	114.1 PK			2.06 H	27	71.6	42.5
2	*5755.00	101.4 AV			2.06 H	27	58.9	42.5
3	11510.00	62.8 PK	74.0	-11.2	2.11 H	200	38.9	23.9
4	11510.00	50.9 AV	54.0	-3.1	2.11 H	200	27.0	23.9
5	#17265.00	-	-	-	-	-	-	-
6	23020.00	-	-	-	-	-	-	-
7	#28775.00	-	-	-	-	-	-	-
8	#34530.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)..
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)..
3. Margin value = Emission Level – Limit value..
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

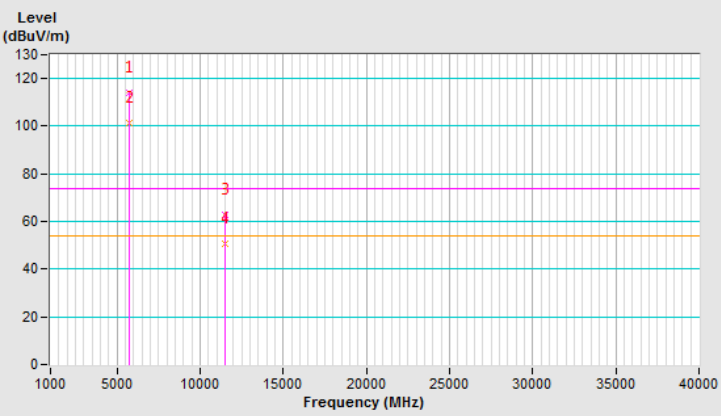


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 151：5755 MHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=3kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 07 月 05 日	測 試 者 ：	張家誠

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5755.00	112.1 PK			2.00 V	51	69.6	42.5
2	*5755.00	99.4 AV			2.00 V	51	56.9	42.5
3	11510.00	62.6 PK	74.0	-11.4	2.99 V	263	38.7	23.9
4	11510.00	50.7 AV	54.0	-3.3	2.99 V	263	26.8	23.9
5	#17265.00	-	-	-	-	-	-	-
6	23020.00	-	-	-	-	-	-	-
7	#28775.00	-	-	-	-	-	-	-
8	#34530.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)..
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)..
3. Margin value = Emission Level – Limit value..
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

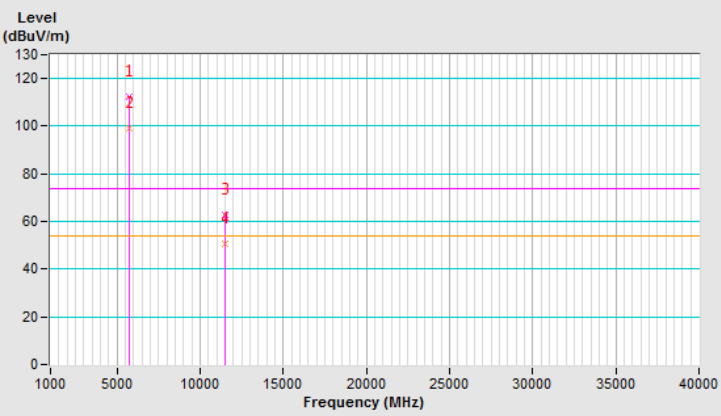


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 151：5755 MHz (OOBE)	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=3kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 07 月 04 日	測 試 者 ：	張家誠

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5612.80	64.0 PK	68.2	-4.2	2.06 H	27	51.3	12.7
2	#5959.20	63.9 PK	68.2	-4.3	2.06 H	27	50.3	13.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)..
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)..
3. Margin value = Emission Level – Limit value..
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

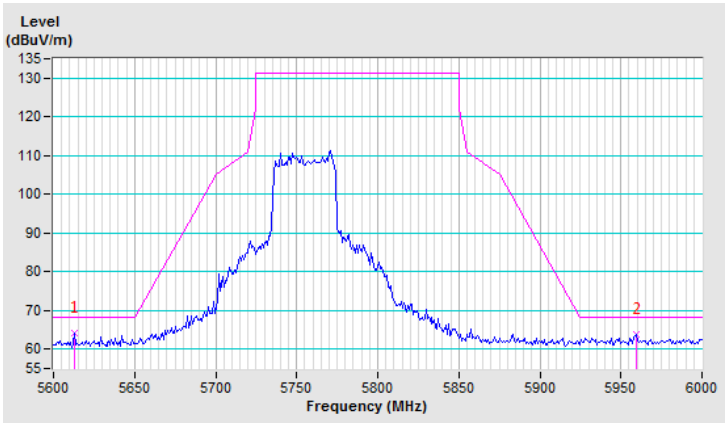


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 151：5755 MHz (OOBE)	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=3kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 07 月 05 日	測 試 者 ：	張家誠

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5634.40	62.7 PK	68.2	-5.5	2.00 V	51	50.0	12.7
2	#5956.80	63.7 PK	68.2	-4.5	2.00 V	51	50.1	13.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)..
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)..
3. Margin value = Emission Level – Limit value..
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

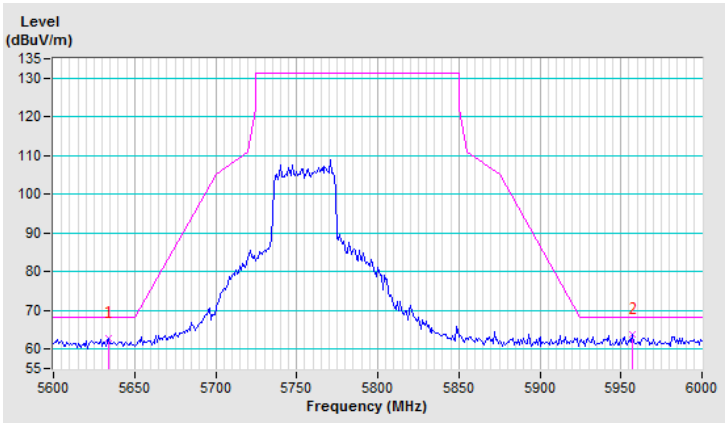


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 159：5795 MHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=3kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 07 月 04 日	測 試 者 ：	張家誠

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5795.00	113.1 PK			2.06 H	46	70.5	42.6
2	*5795.00	100.7 AV			2.06 H	46	58.1	42.6
3	11590.00	63.0 PK	74.0	-11.0	3.01 H	339	39.2	23.8
4	11590.00	50.7 AV	54.0	-3.3	3.01 H	339	26.9	23.8
5	#17385.00	-	-	-	-	-	-	-
6	#23180.00	-	-	-	-	-	-	-
7	#28975.00	-	-	-	-	-	-	-
8	#34770.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)..
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)..
3. Margin value = Emission Level – Limit value..
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

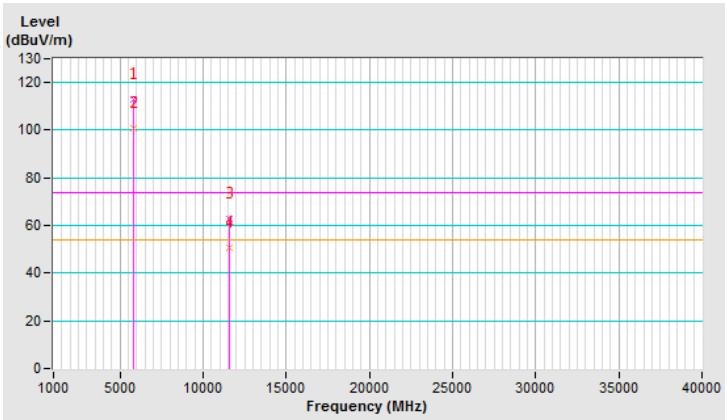


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 159：5795 MHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=3kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 07 月 05 日	測 試 者 ：	張家誠

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5795.00	111.1 PK			2.01 V	52	68.5	42.6
2	*5795.00	98.7 AV			2.01 V	52	56.1	42.6
3	11590.00	62.8 PK	74.0	-11.2	3.11 V	185	39.0	23.8
4	11590.00	50.5 AV	54.0	-3.5	3.11 V	185	26.7	23.8
5	#17385.00	-	-	-	-	-	-	-
6	#23180.00	-	-	-	-	-	-	-
7	#28975.00	-	-	-	-	-	-	-
8	#34770.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)..
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)..
3. Margin value = Emission Level – Limit value..
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

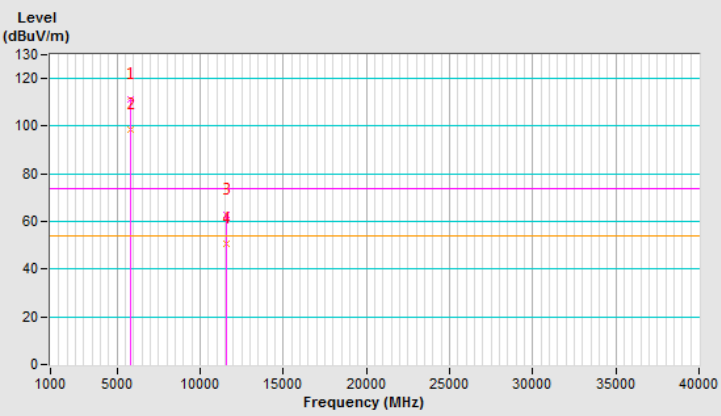


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 159：5795 MHz (OOBE)	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=3kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 07 月 04 日	測 試 者 ：	張家誠

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5627.20	62.4 PK	68.2	-5.8	2.06 H	46	49.7	12.7
2	#5992.00	63.5 PK	68.2	-4.7	2.06 H	46	49.7	13.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)..
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)..
3. Margin value = Emission Level – Limit value..
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

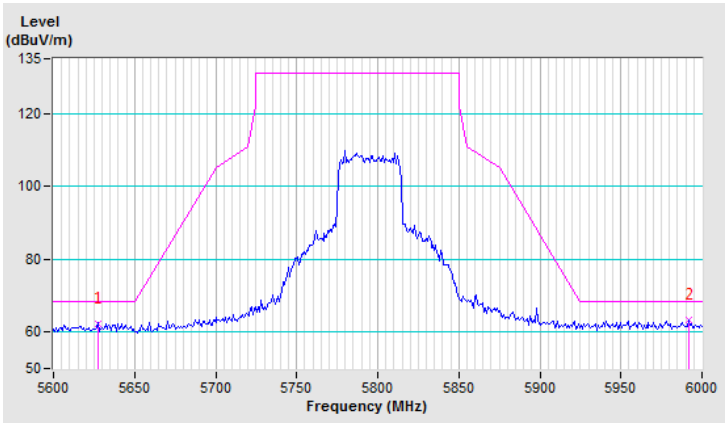


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 159：5795 MHz (OOBE)	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=3kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 07 月 05 日	測 試 者 ：	張家誠

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5602.40	62.8 PK	68.2	-5.4	2.01 V	52	50.2	12.6
2	#5968.80	63.0 PK	68.2	-5.2	2.01 V	52	49.3	13.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)..
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)..
3. Margin value = Emission Level – Limit value..
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

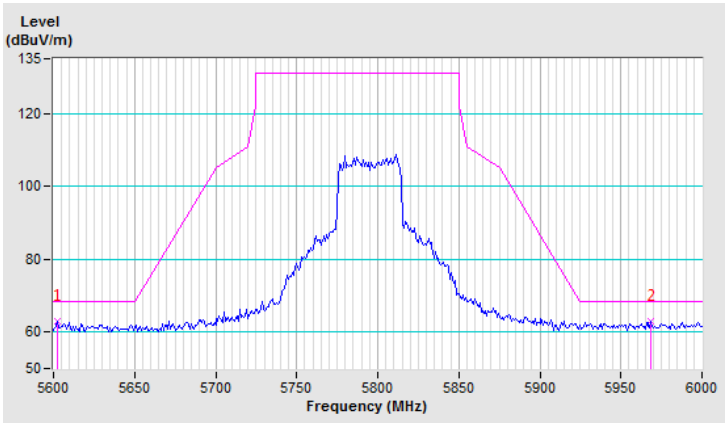


802.11ax (HE80)

操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 42：5210 MHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=3kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 07 月 04 日	測 試 者 ：	張家誠

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	69.2 PK	74.0	-4.8	2.44 H	21	56.6	12.6
2	5150.00	52.4 AV	54.0	-1.6	2.44 H	21	39.8	12.6
3	*5210.00	106.8 PK			2.45 H	25	65.4	41.4
4	*5210.00	93.7 AV			2.45 H	25	52.3	41.4
5	5350.00	60.3 PK	74.0	-13.7	2.40 H	22	47.9	12.4
6	5350.00	47.3 AV	54.0	-6.7	2.40 H	22	34.9	12.4
7	#10420.00	62.3 PK	68.2	-5.9	2.10 H	185	39.5	22.8
8	15630.00	-	-	-	-	-	-	-
9	20840.00	-	-	-	-	-	-	-
10	#26050.00	-	-	-	-	-	-	-
11	31260.00	-	-	-	-	-	-	-
12	36470.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)..
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)..
3. Margin value = Emission Level – Limit value..
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

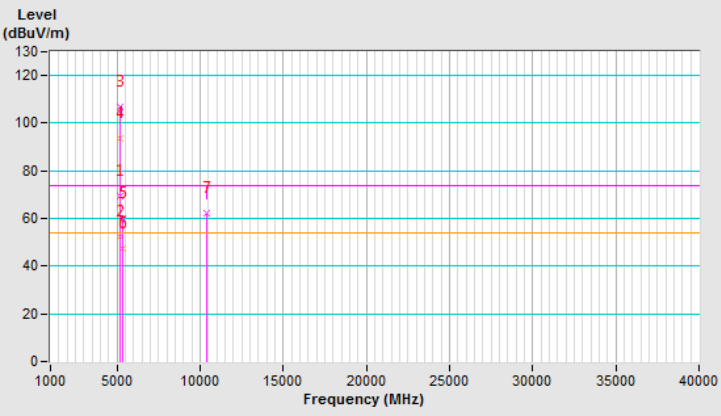


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 42：5210 MHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=3kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 07 月 04 日	測 試 者 ：	張家誠

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	65.6 PK	74.0	-8.4	1.05 V	42	53.0	12.6
2	5150.00	49.2 AV	54.0	-4.8	1.05 V	42	36.6	12.6
3	*5210.00	103.1 PK			1.00 V	40	61.7	41.4
4	*5210.00	90.2 AV			1.00 V	40	48.8	41.4
5	5350.00	61.1 PK	74.0	-12.9	1.09 V	52	48.7	12.4
6	5350.00	47.3 AV	54.0	-6.7	1.09 V	52	34.9	12.4
7	#10420.00	62.0 PK	68.2	-6.2	2.93 V	266	39.2	22.8
8	15630.00	-	-	-	-	-	-	-
9	20840.00	-	-	-	-	-	-	-
10	#26050.00	-	-	-	-	-	-	-
11	31260.00	-	-	-	-	-	-	-
12	36470.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)..
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)..
3. Margin value = Emission Level – Limit value..
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

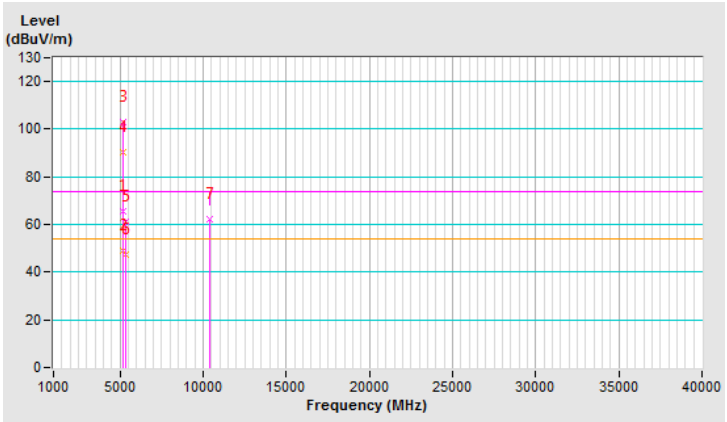


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 155：5775 MHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=3kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 07 月 05 日	測 試 者 ：	張家誠

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5775.00	112.1 PK			1.77 H	48	69.5	42.6
2	*5775.00	97.9 AV			1.77 H	48	55.3	42.6
3	11550.00	62.9 PK	74.0	-11.1	3.18 H	152	39.0	23.9
4	11550.00	50.8 AV	54.0	-3.2	3.18 H	152	26.9	23.9
5	#17325.00	-	-	-	-	-	-	-
6	23100.00	-	-	-	-	-	-	-
7	#28875.00	-	-	-	-	-	-	-
8	#34650.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)..
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)..
3. Margin value = Emission Level – Limit value..
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

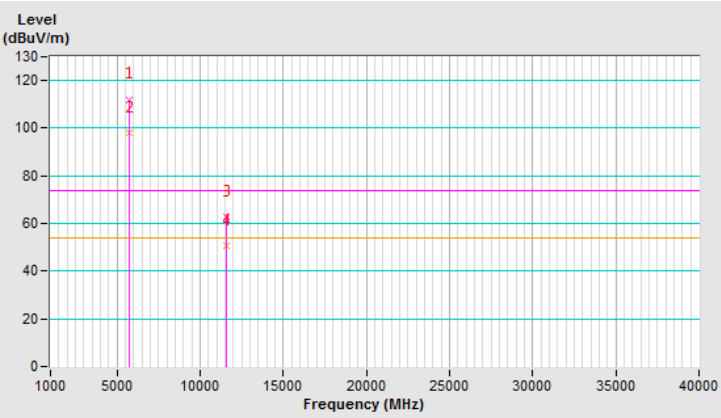


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 155：5775 MHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=3kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 07 月 05 日	測 試 者 ：	張家誠

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5775.00	109.4 PK			2.56 V	55	66.8	42.6
2	*5775.00	96.1 AV			2.56 V	55	53.5	42.6
3	11550.00	62.7 PK	74.0	-11.3	1.00 V	215	38.8	23.9
4	11550.00	50.4 AV	54.0	-3.6	1.00 V	215	26.5	23.9
5	#17325.00	-	-	-	-	-	-	-
6	23100.00	-	-	-	-	-	-	-
7	#28875.00	-	-	-	-	-	-	-
8	#34650.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)..
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)..
3. Margin value = Emission Level – Limit value..
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

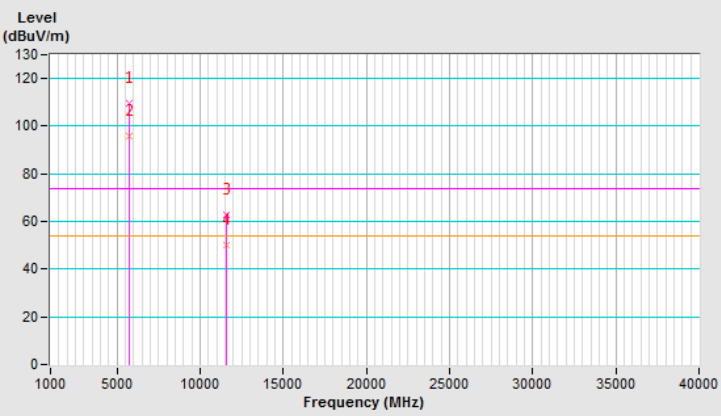


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 155：5775 MHz (OOBE)	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=3kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 07 月 05 日	測 試 者 ：	張家誠

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5628.80	66.8 PK	68.2	-1.4	1.77 H	48	54.1	12.7
2	#5938.40	67.0 PK	68.2	-1.2	1.77 H	48	53.4	13.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)..
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)..
3. Margin value = Emission Level – Limit value..
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

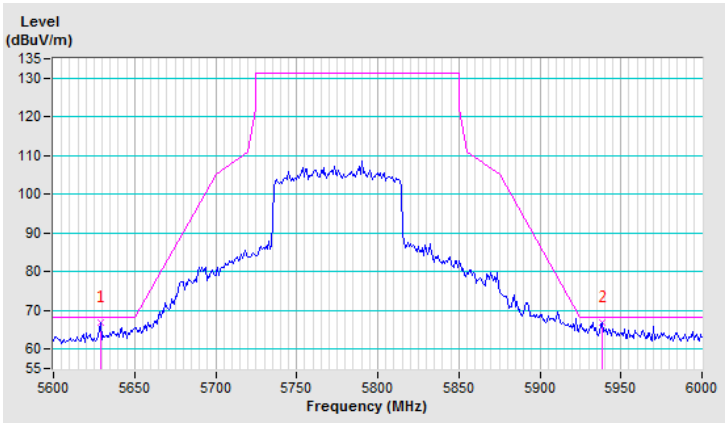


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 155：5775 MHz (OOBE)	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=3kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 07 月 05 日	測 試 者 ：	張家誠

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5649.60	66.0 PK	68.2	-2.2	2.56 V	55	53.4	12.6
2	#5925.60	65.2 PK	68.2	-3.0	2.56 V	55	51.6	13.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)..
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)..
3. Margin value = Emission Level – Limit value..
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

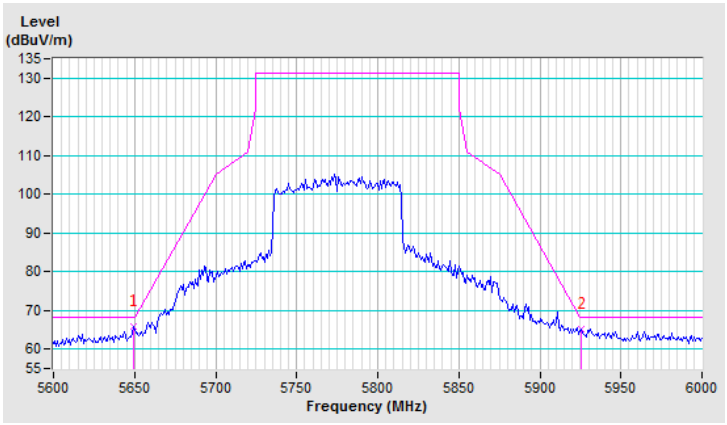

2TX


802.11a

操 作 模 式 ：	發射	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 36：5180 MHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 06 月 24 日	測 試 者 ：	張家誠

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	68.6 PK	74.0	-5.4	1.00 H	349	56.0	12.6
2	5150.00	53.0 AV	54.0	-1.0	1.00 H	349	40.4	12.6
3	*5180.00	113.5 PK			1.00 H	341	72.0	41.5
4	*5180.00	103.9 AV			1.00 H	341	62.4	41.5
5	#10360.00	61.9 PK	68.2	-6.3	1.09 H	211	39.4	22.5
6	15540.00	-	-	-	-	-	-	-
7	20720.00	-	-	-	-	-	-	-
8	#25900.00	-	-	-	-	-	-	-
9	#31080.00	-	-	-	-	-	-	-
10	#36260.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)..
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)..
3. Margin value = Emission Level – Limit value..
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

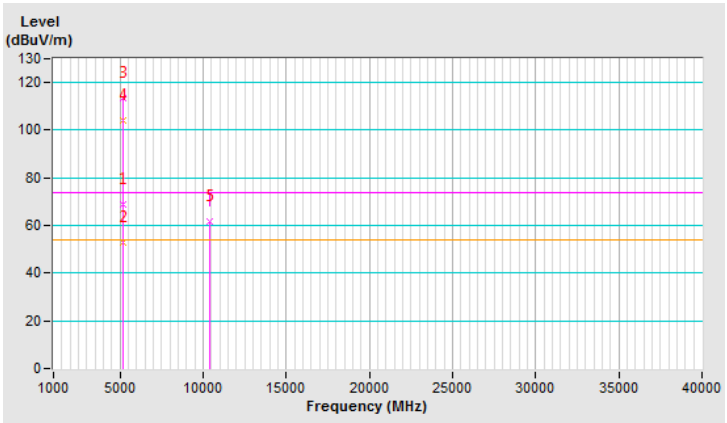


操作模式：	發射	調變技術：	OFDM
基本波頻率：	CH 36：5180 MHz	測試儀器：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量測場地溫度：	25℃	量測場地濕度：	70%RH
測試日期：	108 年 06 月 24 日	測試者：	張家誠

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	67.9 PK	74.0	-6.1	1.06 V	48	55.3	12.6
2	5150.00	50.9 AV	54.0	-3.1	1.06 V	48	38.3	12.6
3	*5180.00	111.3 PK			1.01 V	37	69.8	41.5
4	*5180.00	102.1 AV			1.01 V	37	60.6	41.5
5	#10360.00	61.7 PK	68.2	-6.5	1.55 V	129	39.2	22.5
6	15540.00	-	-	-	-	-	-	-
7	20720.00	-	-	-	-	-	-	-
8	#25900.00	-	-	-	-	-	-	-
9	#31080.00	-	-	-	-	-	-	-
10	#36260.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)..
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)..
3. Margin value = Emission Level – Limit value..
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

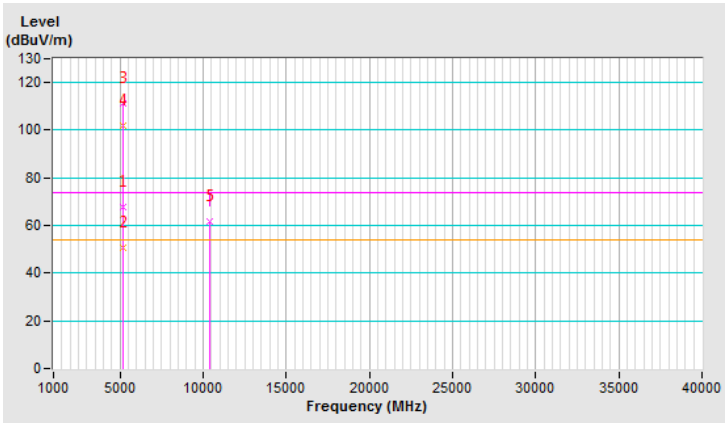


操 作 模 式 ：	發射	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 40：5200 MHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 06 月 24 日	測 試 者 ：	張家誠

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	66.6 PK	74.0	-7.4	1.05 H	359	54.0	12.6
2	5150.00	53.0 AV	54.0	-1.0	1.05 H	359	40.4	12.6
3	*5200.00	117.4 PK			1.08 H	341	75.9	41.5
4	*5200.00	107.2 AV			1.08 H	341	65.7	41.5
5	#10400.00	61.8 PK	68.2	-6.4	3.15 H	300	38.9	22.9
6	15600.00	-	-	-	-	-	-	-
7	20800.00	-	-	-	-	-	-	-
8	#26000.00	-	-	-	-	-	-	-
9	31200.00	-	-	-	-	-	-	-
10	#36400.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)..
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)..
3. Margin value = Emission Level – Limit value..
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

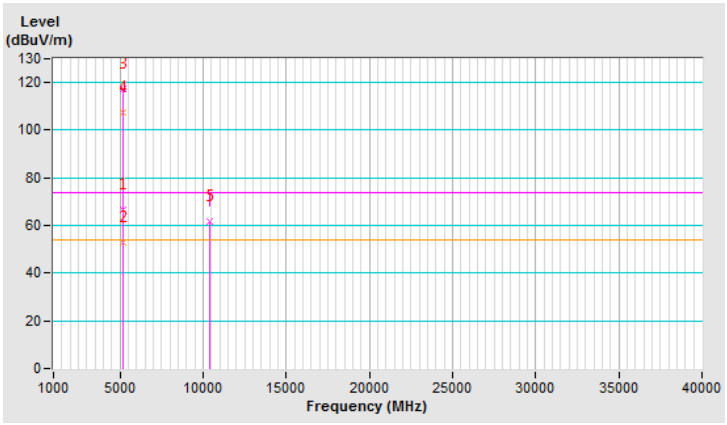


操 作 模 式 ：	發射	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 40：5200 MHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 07 月 3 日	測 試 者 ：	張家誠

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	65.6 PK	74.0	-8.4	1.05 V	55	53.0	12.6
2	5150.00	51.3 AV	54.0	-2.7	1.05 V	55	38.7	12.6
3	*5200.00	115.4 PK			1.05 V	41	73.9	41.5
4	*5200.00	105.2 AV			1.05 V	41	63.7	41.5
5	#10400.00	61.6 PK	68.2	-6.6	2.18 V	244	38.7	22.9
6	15600.00	-	-	-	-	-	-	-
7	20800.00	-	-	-	-	-	-	-
8	#26000.00	-	-	-	-	-	-	-
9	31200.00	-	-	-	-	-	-	-
10	#36400.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)..
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)..
3. Margin value = Emission Level – Limit value..
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

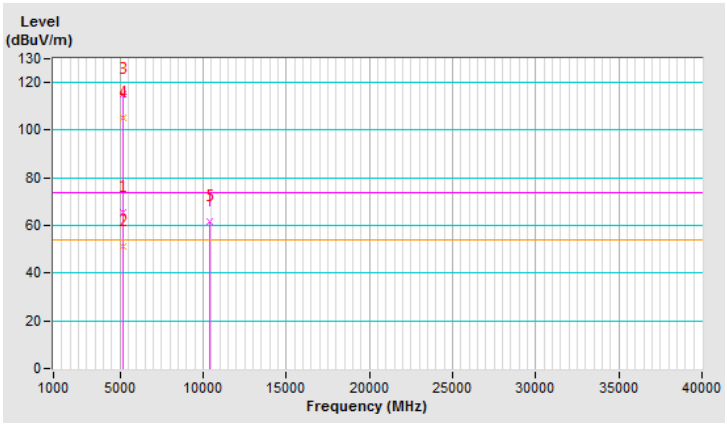


操 作 模 式 ：	發射	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 48：5240 MHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 06 月 24 日	測 試 者 ：	張家誠

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5240.00	117.6 PK			1.53 H	342	76.4	41.2
2	*5240.00	107.7 AV			1.53 H	342	66.5	41.2
3	5350.00	61.7 PK	74.0	-12.3	1.59 H	349	49.3	12.4
4	5350.00	47.6 AV	54.0	-6.4	1.59 H	349	35.2	12.4
5	#10480.00	62.0 PK	68.2	-6.2	1.02 H	211	39.2	22.8
6	15720.00	-	-	-	-	-	-	-
7	20960.00	-	-	-	-	-	-	-
8	#26200.00	-	-	-	-	-	-	-
9	31440.00	-	-	-	-	-	-	-
10	#36680.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)..
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)..
3. Margin value = Emission Level – Limit value..
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

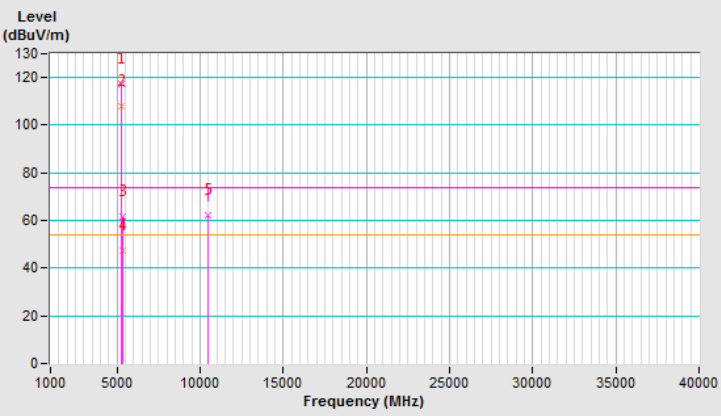


操 作 模 式 ：	發射	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 48：5240 MHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 07 月 3 日	測 試 者 ：	張家誠

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5240.00	115.6 PK			1.02 V	45	74.4	41.2
2	*5240.00	105.7 AV			1.02 V	45	64.5	41.2
3	5350.00	61.5 PK	74.0	-12.5	1.55 V	50	49.1	12.4
4	5350.00	47.4 AV	54.0	-6.6	1.55 V	50	35.0	12.4
5	#10480.00	61.7 PK	68.2	-6.5	2.55 V	301	38.9	22.8
6	15720.00	-	-	-	-	-	-	-
7	20960.00	-	-	-	-	-	-	-
8	#26200.00	-	-	-	-	-	-	-
9	31440.00	-	-	-	-	-	-	-
10	#36680.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)..
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)..
3. Margin value = Emission Level – Limit value..
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

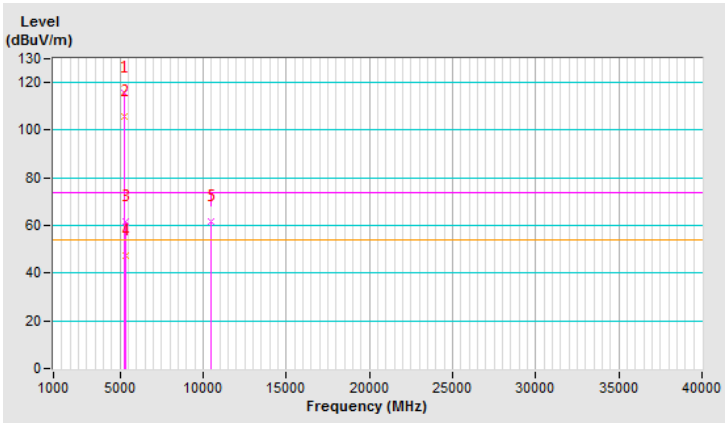


操 作 模 式 ：	發射	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 149：5745 MHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 06 月 27 日	測 試 者 ：	張家誠

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5745.00	118.0 PK			2.45 H	346	75.5	42.5
2	*5745.00	108.3 AV			2.45 H	346	65.8	42.5
3	11490.00	63.9 PK	74.0	-10.1	2.03 H	211	39.8	24.1
4	11490.00	51.0 AV	54.0	-3.0	2.03 H	211	26.9	24.1
5	#17235.00	-	-	-	-	-	-	-
6	22980.00	-	-	-	-	-	-	-
7	#28725.00	-	-	-	-	-	-	-
8	#34470.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)..
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)..
3. Margin value = Emission Level – Limit value..
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

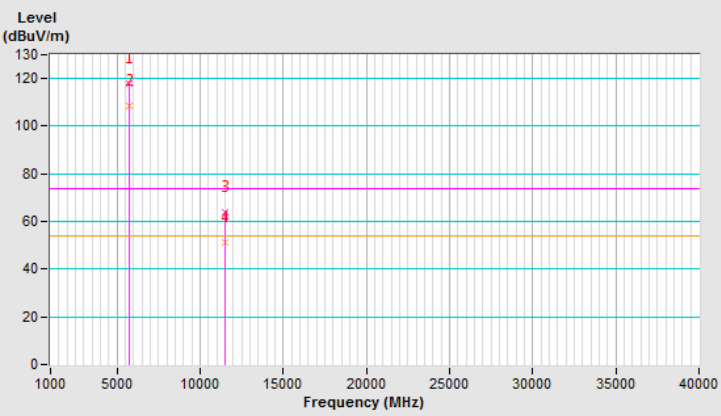


操 作 模 式 ：	發射	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 149：5745 MHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 06 月 27 日	測 試 者 ：	張家誠

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5745.00	117.0 PK			1.79 V	34	74.5	42.5
2	*5745.00	107.3 AV			1.79 V	34	64.8	42.5
3	11490.00	63.6 PK	74.0	-10.4	3.16 V	329	39.5	24.1
4	11490.00	50.8 AV	54.0	-3.2	3.16 V	329	26.7	24.1
5	#17235.00	-	-	-	-	-	-	-
6	22980.00	-	-	-	-	-	-	-
7	#28725.00	-	-	-	-	-	-	-
8	#34470.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)..
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)..
3. Margin value = Emission Level – Limit value..
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

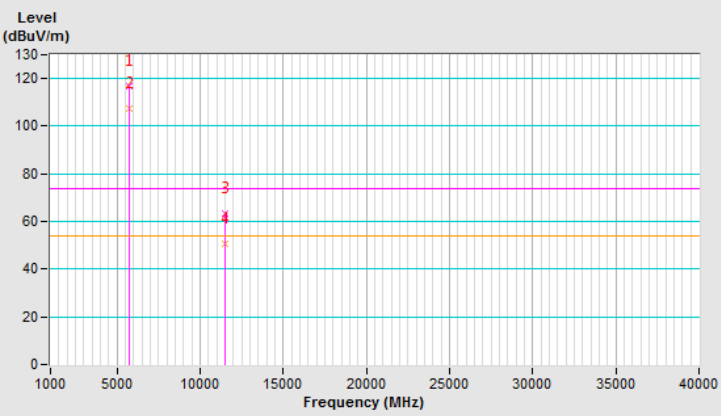


操 作 模 式 ：	發射	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 149：5745 MHz (OOBE)	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 06 月 27 日	測 試 者 ：	張家誠

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5648.80	65.7 PK	68.2	-2.5	2.45 H	346	53.1	12.6
2	#5999.20	66.5 PK	68.2	-1.7	2.45 H	346	52.7	13.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)..
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)..
3. Margin value = Emission Level – Limit value..
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

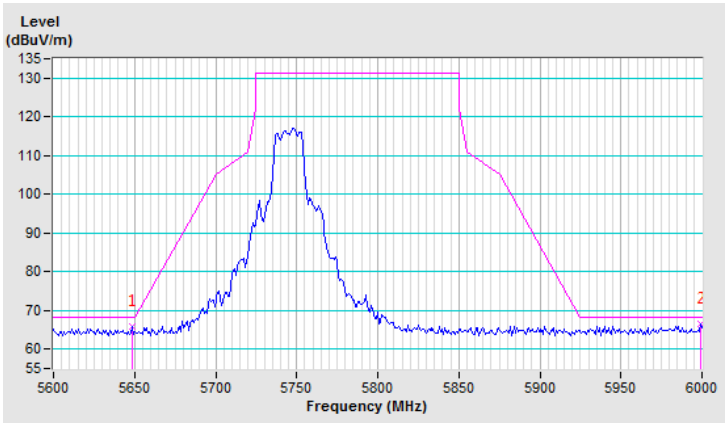


操 作 模 式 ：	發射	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 149：5745 MHz (OOBE)	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 06 月 27 日	測 試 者 ：	張家誠

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5641.60	65.7 PK	68.2	-2.5	1.79 V	34	53.0	12.7
2	#5995.20	66.3 PK	68.2	-1.9	1.79 V	34	52.5	13.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)..
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)..
3. Margin value = Emission Level – Limit value..
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

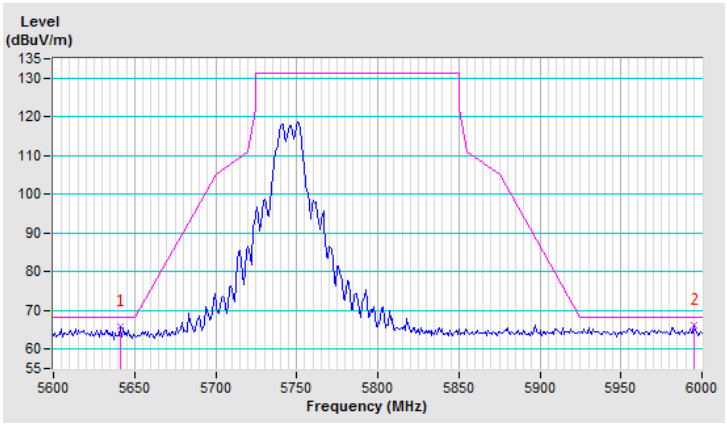


操 作 模 式 ：	發射	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 157：5785 MHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 06 月 27 日	測 試 者 ：	張家誠

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5785.00	118.3 PK			2.11 H	338	75.7	42.6
2	*5785.00	107.9 AV			2.11 H	338	65.3	42.6
3	11570.00	63.8 PK	74.0	-10.2	2.55 H	155	39.8	24.0
4	11570.00	51.1 AV	54.0	-2.9	2.55 H	155	27.1	24.0
5	#17355.00	-	-	-	-	-	-	-
6	#23140.00	-	-	-	-	-	-	-
7	#28925.00	-	-	-	-	-	-	-
8	#34710.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)..
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)..
3. Margin value = Emission Level – Limit value..
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

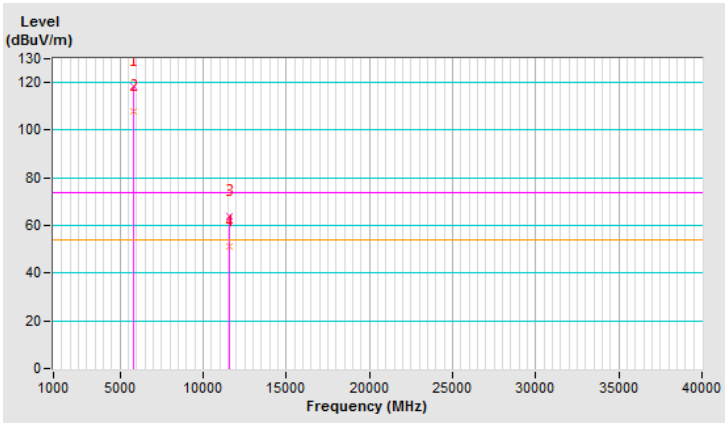


操 作 模 式 ：	發射	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 157：5785 MHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 06 月 27 日	測 試 者 ：	張家誠

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5785.00	117.3 PK			2.00 V	36	74.7	42.6
2	*5785.00	106.9 AV			2.00 V	36	64.3	42.6
3	11570.00	63.6 PK	74.0	-10.4	3.01 V	315	39.6	24.0
4	11570.00	50.8 AV	54.0	-3.2	3.01 V	315	26.8	24.0
5	#17355.00	-	-	-	-	-	-	-
6	#23140.00	-	-	-	-	-	-	-
7	#28925.00	-	-	-	-	-	-	-
8	#34710.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)..
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)..
3. Margin value = Emission Level – Limit value..
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

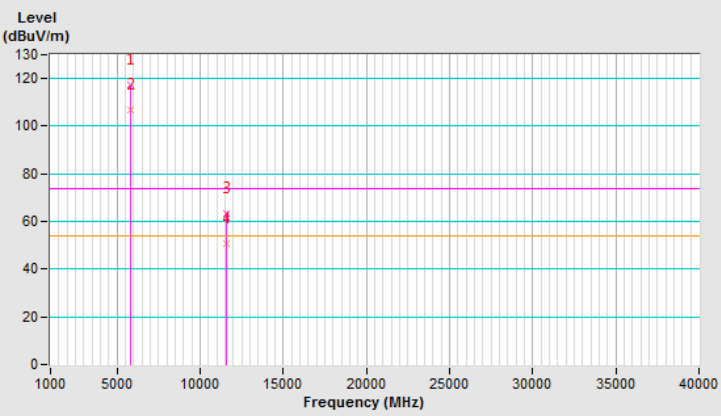


操 作 模 式 ：	發射	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 157：5785 MHz (OOBE)	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 06 月 27 日	測 試 者 ：	張家誠

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5600.80	65.3 PK	68.2	-2.9	2.11 H	338	52.7	12.6
2	#5934.40	65.8 PK	68.2	-2.4	2.11 H	338	52.2	13.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)..
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)..
3. Margin value = Emission Level – Limit value..
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

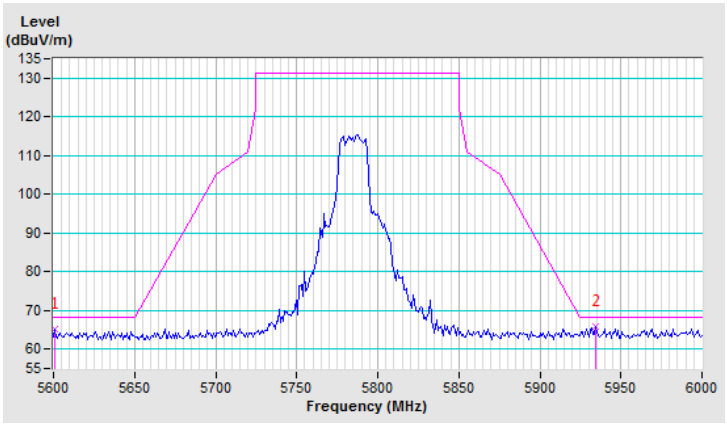


操 作 模 式 ：	發射	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 157：5785 MHz (OOBE)	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 06 月 27 日	測 試 者 ：	張家誠

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5610.40	64.4 PK	68.2	-3.8	2.00 V	36	51.7	12.7
2	#5927.20	65.3 PK	68.2	-2.9	2.00 V	36	51.7	13.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)..
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)..
3. Margin value = Emission Level – Limit value..
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

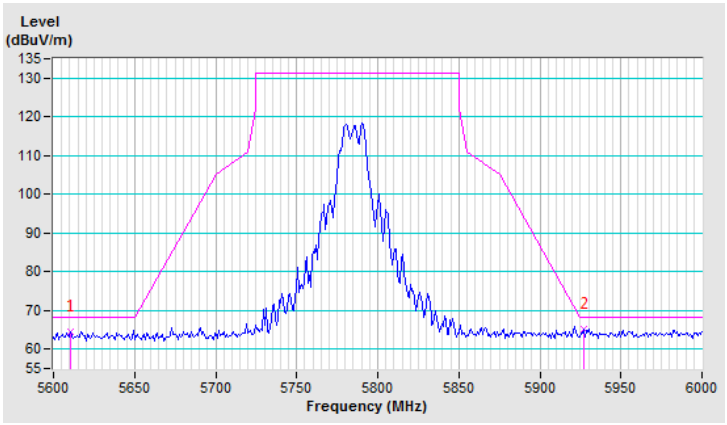


操 作 模 式 ：	發射	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 165：5825 MHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 06 月 27 日	測 試 者 ：	張家誠

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5825.00	117.5 PK			2.16 H	339	74.9	42.6
2	*5825.00	106.6 AV			2.16 H	339	64.0	42.6
3	11650.00	63.3 PK	74.0	-10.7	1.69 H	330	39.7	23.6
4	11650.00	50.3 AV	54.0	-3.7	1.69 H	330	26.7	23.6
5	#17475.00	-	-	-	-	-	-	-
6	#23300.00	-	-	-	-	-	-	-
7	#29125.00	-	-	-	-	-	-	-
8	#34950.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)..
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)..
3. Margin value = Emission Level – Limit value..
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

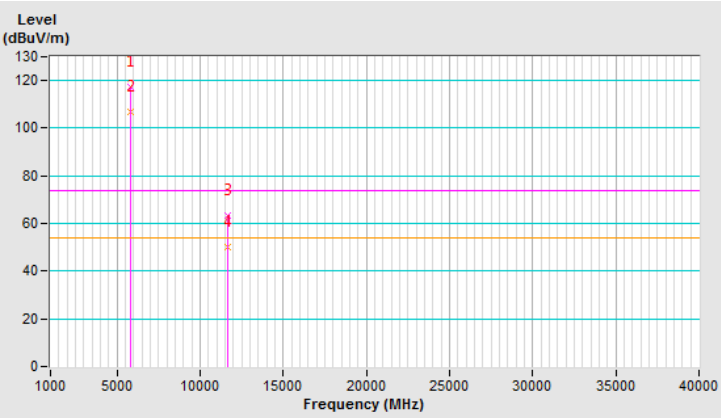


操 作 模 式 ：	發射	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 165：5825 MHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 06 月 27 日	測 試 者 ：	張家誠

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5825.00	116.5 PK			1.25 V	30	73.9	42.6
2	*5825.00	105.6 AV			1.25 V	30	63.0	42.6
3	11650.00	63.1 PK	74.0	-10.9	2.99 V	263	39.5	23.6
4	11650.00	50.0 AV	54.0	-4.0	2.99 V	263	26.4	23.6
5	#17475.00	-	-	-	-	-	-	-
6	#23300.00	-	-	-	-	-	-	-
7	#29125.00	-	-	-	-	-	-	-
8	#34950.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)..
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)..
3. Margin value = Emission Level – Limit value..
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

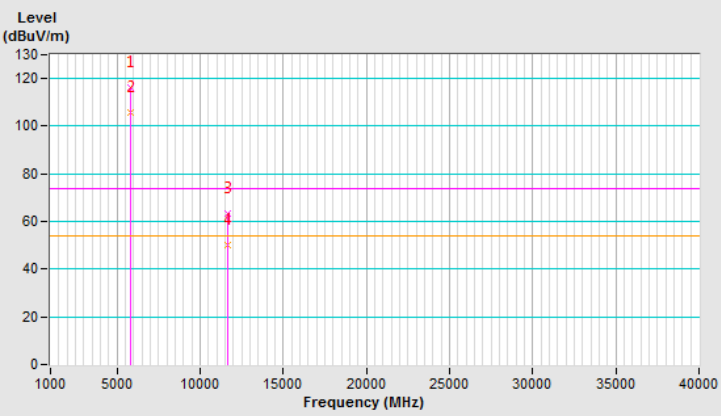


操 作 模 式 ：	發射	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 165：5825 MHz (OOBE)	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 06 月 27 日	測 試 者 ：	張家誠

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5643.20	65.0 PK	68.2	-3.2	2.16 H	339	52.3	12.7
2	#5962.40	65.4 PK	68.2	-2.8	2.16 H	339	51.7	13.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)..
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)..
3. Margin value = Emission Level – Limit value..
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

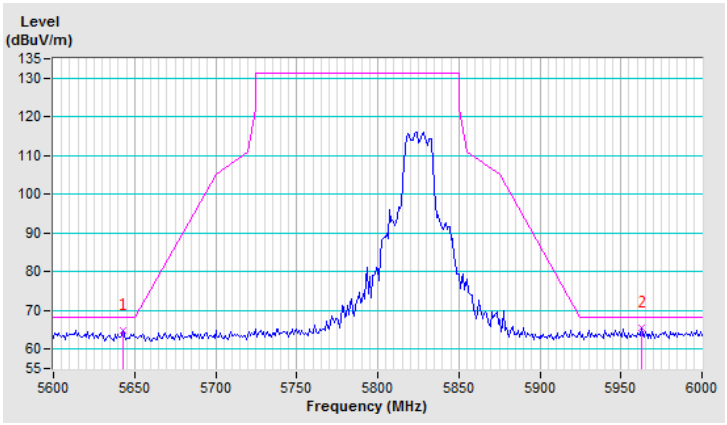


操 作 模 式 ：	發射	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 165：5825 MHz (OOBE)	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 06 月 27 日	測 試 者 ：	張家誠

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5625.60	64.6 PK	68.2	-3.6	1.25 V	30	51.9	12.7
2	#5984.00	65.1 PK	68.2	-3.1	1.25 V	30	51.3	13.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)..
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)..
3. Margin value = Emission Level – Limit value..
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

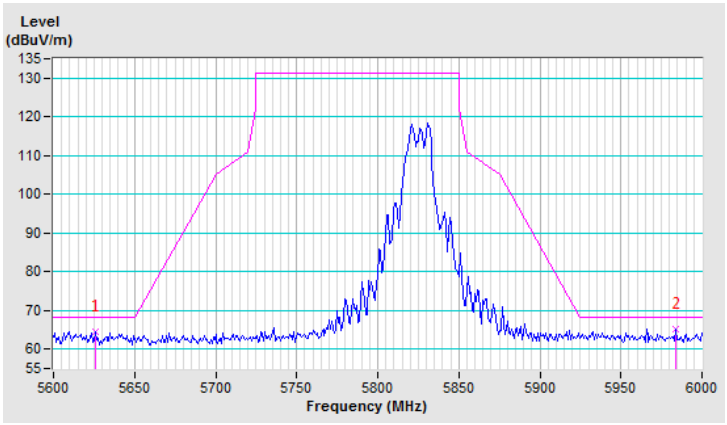


802.11ax (HE20)

操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA-MIMO
基 本 波 頻 率 ：	CH 36：5180 MHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 06 月 24 日	測 試 者 ：	張家誠

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	70.8 PK	74.0	-3.2	1.41 H	341	58.2	12.6
2	5150.00	52.4 AV	54.0	-1.6	1.41 H	341	39.8	12.6
3	*5180.00	114.3 PK			1.48 H	349	72.8	41.5
4	*5180.00	101.3 AV			1.48 H	349	59.8	41.5
5	#10360.00	61.9 PK	68.2	-6.3	1.88 H	153	39.4	22.5
6	15540.00	-	-	-	-	-	-	-
7	20720.00	-	-	-	-	-	-	-
8	#25900.00	-	-	-	-	-	-	-
9	#31080.00	-	-	-	-	-	-	-
10	#36260.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)..
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)..
3. Margin value = Emission Level – Limit value..
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

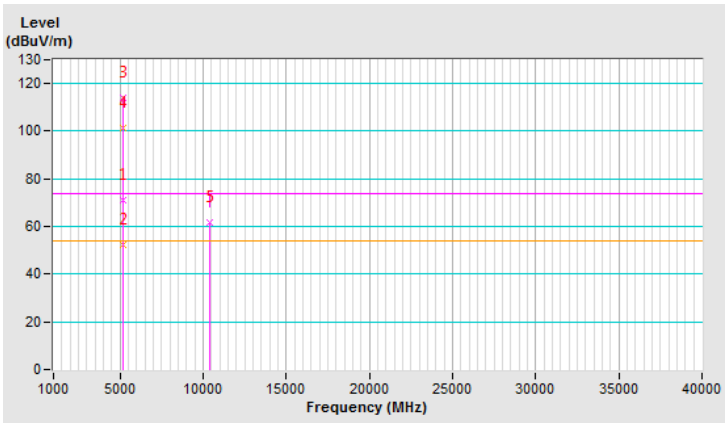


操作模式：	發射	調變技術：	OFDMA-MIMO
基本波頻率：	CH 36：5180 MHz	測試儀器：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量測場地溫度：	25℃	量測場地濕度：	70%RH
測試日期：	108 年 07 月 3 日	測試者：	張家誠

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	68.6 PK	74.0	-5.4	1.08 V	41	56.0	12.6
2	5150.00	50.8 AV	54.0	-3.2	1.08 V	41	38.2	12.6
3	*5180.00	112.3 PK			1.05 V	53	70.8	41.5
4	*5180.00	99.3 AV			1.05 V	53	57.8	41.5
5	#10360.00	61.6 PK	68.2	-6.6	2.15 V	288	39.1	22.5
6	15540.00	-	-	-	-	-	-	-
7	20720.00	-	-	-	-	-	-	-
8	#25900.00	-	-	-	-	-	-	-
9	#31080.00	-	-	-	-	-	-	-
10	#36260.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)..
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)..
3. Margin value = Emission Level – Limit value..
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

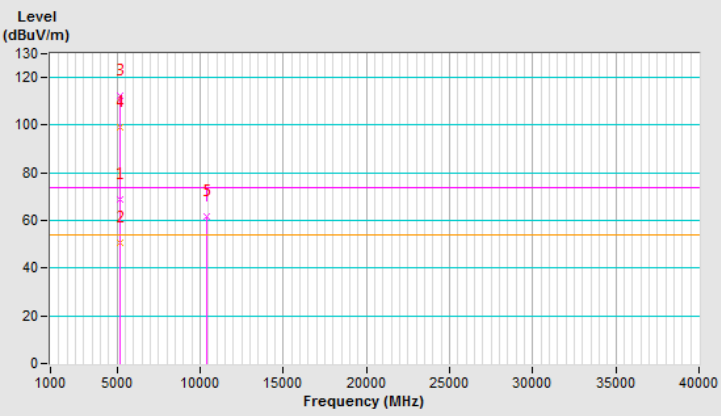


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA-MIMO
基 本 波 頻 率 ：	CH 40：5200 MHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 06 月 24 日	測 試 者 ：	張家誠

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	67.3 PK	74.0	-6.7	1.39 H	339	54.7	12.6
2	5150.00	52.9 AV	54.0	-1.1	1.39 H	339	40.3	12.6
3	*5200.00	118.2 PK			1.34 H	342	76.7	41.5
4	*5200.00	105.3 AV			1.34 H	342	63.8	41.5
5	#10400.00	62.4 PK	68.2	-5.8	1.55 H	233	39.5	22.9
6	15600.00	-	-	-	-	-	-	-
7	20800.00	-	-	-	-	-	-	-
8	#26000.00	-	-	-	-	-	-	-
9	31200.00	-	-	-	-	-	-	-
10	#36400.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)..
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)..
3. Margin value = Emission Level – Limit value..
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

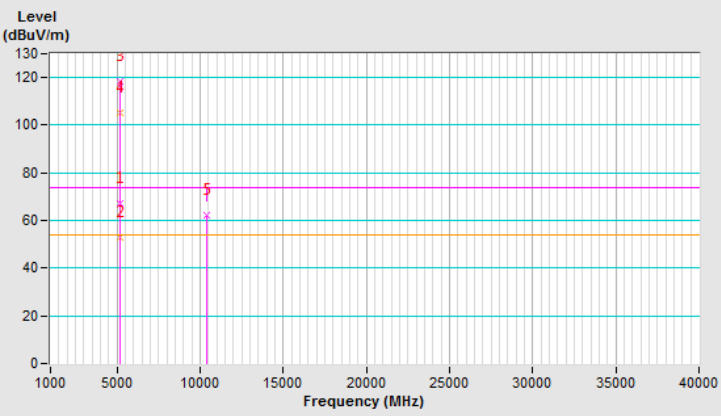


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA-MIMO
基 本 波 頻 率 ：	CH 40：5200 MHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 07 月 3 日	測 試 者 ：	張家誠

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	65.3 PK	74.0	-8.7	1.52 V	50	52.7	12.6
2	5150.00	51.2 AV	54.0	-2.8	1.52 V	50	38.6	12.6
3	*5200.00	116.2 PK			1.20 V	51	74.7	41.5
4	*5200.00	103.3 AV			1.20 V	51	61.8	41.5
5	#10400.00	62.5 PK	68.2	-5.7	3.00 V	322	39.6	22.9
6	15600.00	-	-	-	-	-	-	-
7	20800.00	-	-	-	-	-	-	-
8	#26000.00	-	-	-	-	-	-	-
9	31200.00	-	-	-	-	-	-	-
10	#36400.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)..
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)..
3. Margin value = Emission Level – Limit value..
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

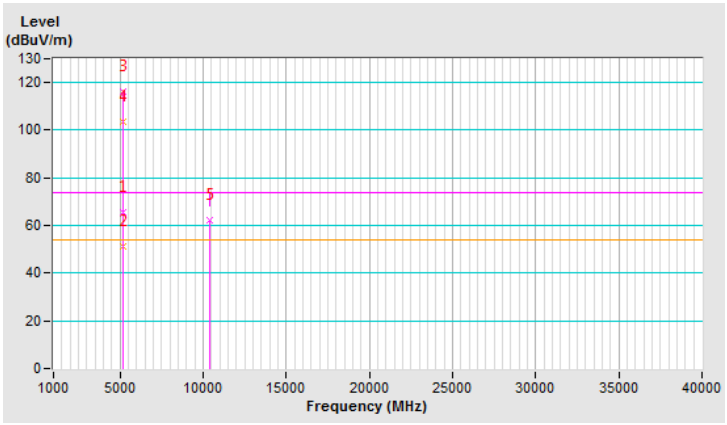


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA-MIMO
基 本 波 頻 率 ：	CH 48：5240 MHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 06 月 24 日	測 試 者 ：	張家誠

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5240.00	119.2 PK			1.33 H	340	78.0	41.2
2	*5240.00	106.9 AV			1.33 H	340	65.7	41.2
3	5350.00	60.4 PK	74.0	-13.6	1.39 H	351	48.0	12.4
4	5350.00	47.5 AV	54.0	-6.5	1.39 H	351	35.1	12.4
5	#10480.00	62.0 PK	68.2	-6.2	1.55 H	269	39.2	22.8
6	15720.00	-	-	-	-	-	-	-
7	20960.00	-	-	-	-	-	-	-
8	#26200.00	-	-	-	-	-	-	-
9	31440.00	-	-	-	-	-	-	-
10	#36680.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)..
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)..
3. Margin value = Emission Level – Limit value..
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

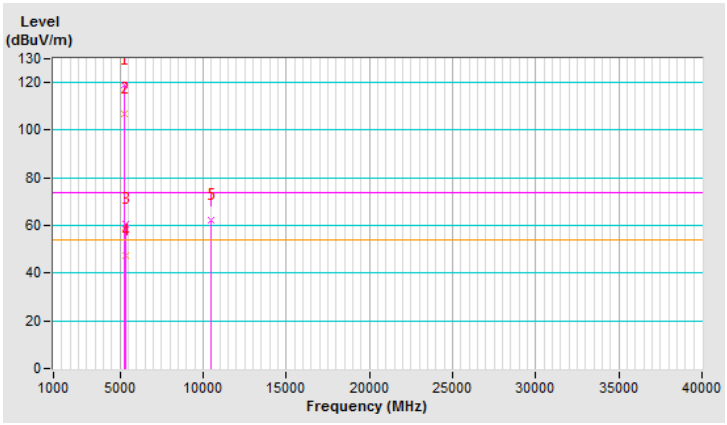


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA-MIMO
基 本 波 頻 率 ：	CH 48：5240 MHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 07 月 3 日	測 試 者 ：	張家誠

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5240.00	117.2 PK			1.05 V	42	76.0	41.2
2	*5240.00	104.9 AV			1.05 V	42	63.7	41.2
3	5350.00	60.2 PK	74.0	-13.8	1.23 V	49	47.8	12.4
4	5350.00	47.2 AV	54.0	-6.8	1.23 V	49	34.8	12.4
5	#10480.00	61.8 PK	68.2	-6.4	2.00 V	244	39.0	22.8
6	15720.00	-	-	-	-	-	-	-
7	20960.00	-	-	-	-	-	-	-
8	#26200.00	-	-	-	-	-	-	-
9	31440.00	-	-	-	-	-	-	-
10	#36680.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)..
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)..
3. Margin value = Emission Level – Limit value..
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

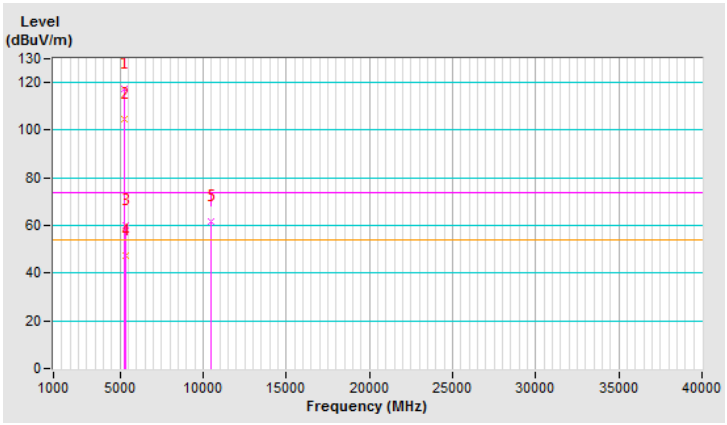


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA-MIMO
基 本 波 頻 率 ：	CH 149：5745 MHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 06 月 27 日	測 試 者 ：	張家誠

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5745.00	119.8 PK			2.24 H	346	77.3	42.5
2	*5745.00	106.5 AV			2.24 H	346	64.0	42.5
3	11490.00	63.8 PK	74.0	-10.2	2.77 H	239	39.7	24.1
4	11490.00	51.2 AV	54.0	-2.8	2.77 H	239	27.1	24.1
5	#17235.00	-	-	-	-	-	-	-
6	22980.00	-	-	-	-	-	-	-
7	#28725.00	-	-	-	-	-	-	-
8	#34470.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)..
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)..
3. Margin value = Emission Level – Limit value..
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

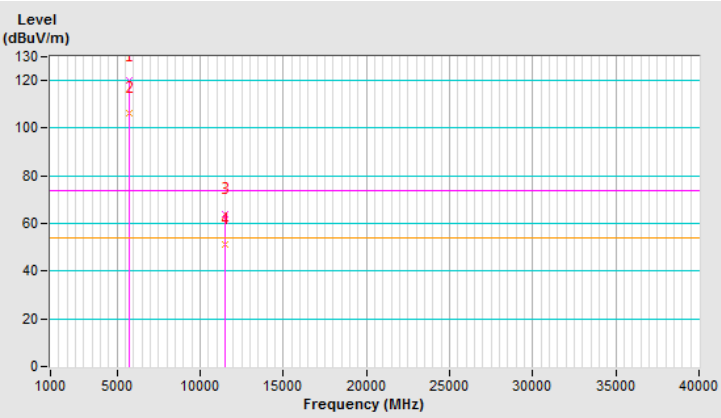


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA-MIMO
基 本 波 頻 率 ：	CH 149：5745 MHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 06 月 27 日	測 試 者 ：	張家誠

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5745.00	118.8 PK			1.70 V	39	76.3	42.5
2	*5745.00	105.5 AV			1.70 V	39	63.0	42.5
3	11490.00	63.7 PK	74.0	-10.3	2.10 V	299	39.6	24.1
4	11490.00	51.0 AV	54.0	-3.0	2.10 V	299	26.9	24.1
5	#17235.00	-	-	-	-	-	-	-
6	22980.00	-	-	-	-	-	-	-
7	#28725.00	-	-	-	-	-	-	-
8	#34470.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)..
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)..
3. Margin value = Emission Level – Limit value..
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

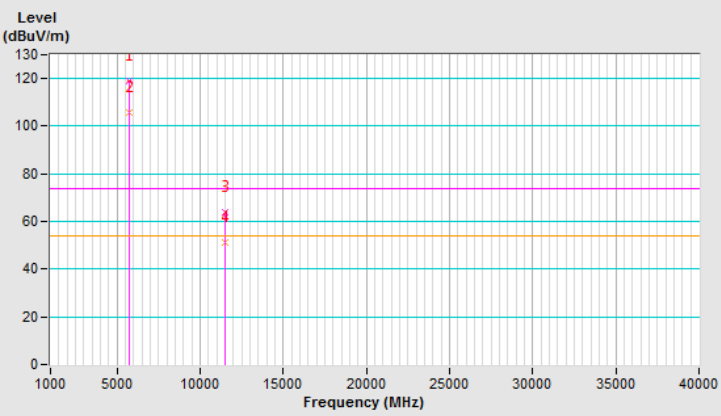


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA-MIMO
基 本 波 頻 率 ：	CH 149：5745 MHz (OOBE)	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 06 月 27 日	測 試 者 ：	張家誠

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5644.00	65.3 PK	68.2	-2.9	2.24 H	346	52.6	12.7
2	#5964.00	66.0 PK	68.2	-2.2	2.24 H	346	52.3	13.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)..
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)..
3. Margin value = Emission Level – Limit value..
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

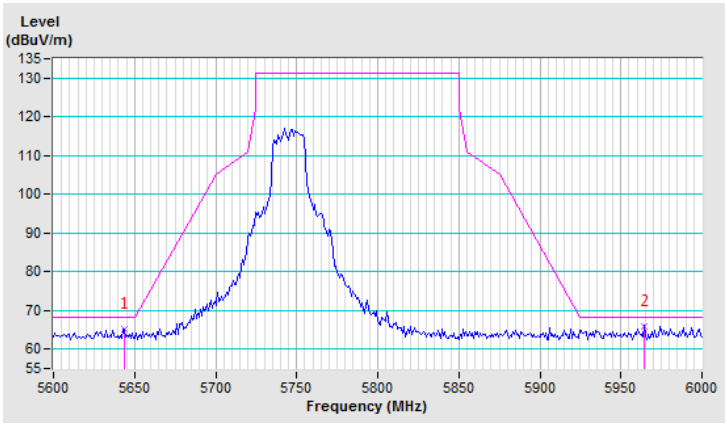


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA-MIMO
基 本 波 頻 率 ：	CH 149：5745 MHz (OOBE)	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 06 月 27 日	測 試 者 ：	張家誠

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5644.00	65.9 PK	68.2	-2.3	1.70 V	39	53.2	12.7
2	#5924.80	66.2 PK	68.3	-2.1	1.70 V	39	52.6	13.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)..
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)..
3. Margin value = Emission Level – Limit value..
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

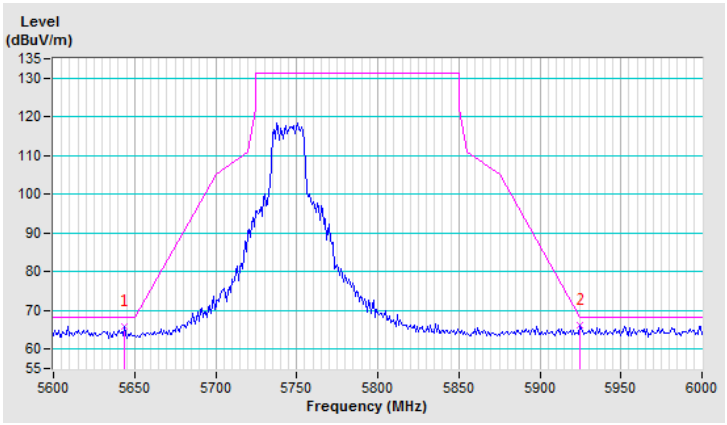


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA-MIMO
基 本 波 頻 率 ：	CH 157：5785 MHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 06 月 27 日	測 試 者 ：	張家誠

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5785.00	120.0 PK			2.14 H	347	77.4	42.6
2	*5785.00	106.6 AV			2.14 H	347	64.0	42.6
3	11570.00	64.1 PK	74.0	-9.9	2.92 H	266	40.1	24.0
4	11570.00	51.0 AV	54.0	-3.0	2.92 H	266	27.0	24.0
5	#17355.00	-	-	-	-	-	-	-
6	#23140.00	-	-	-	-	-	-	-
7	#28925.00	-	-	-	-	-	-	-
8	#34710.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)..
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)..
3. Margin value = Emission Level – Limit value..
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

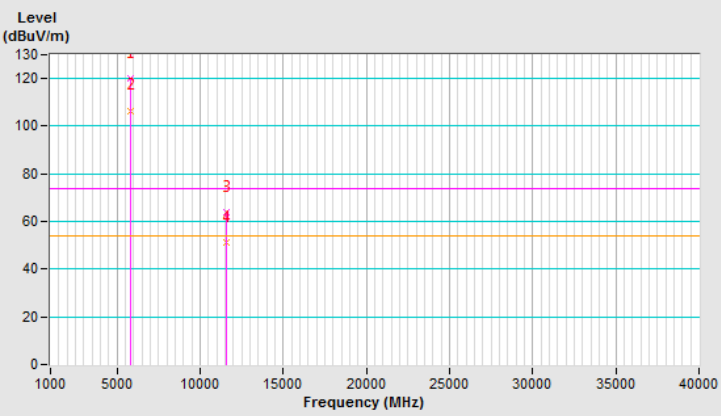


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA-MIMO
基 本 波 頻 率 ：	CH 157：5785 MHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 06 月 27 日	測 試 者 ：	張家誠

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5785.00	119.1 PK			2.00 V	33	76.5	42.6
2	*5785.00	105.7 AV			2.00 V	33	63.1	42.6
3	11570.00	63.8 PK	74.0	-10.2	2.99 V	211	39.8	24.0
4	11570.00	50.8 AV	54.0	-3.2	2.99 V	211	26.8	24.0
5	#17355.00	-	-	-	-	-	-	-
6	#23140.00	-	-	-	-	-	-	-
7	#28925.00	-	-	-	-	-	-	-
8	#34710.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)..
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)..
3. Margin value = Emission Level – Limit value..
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

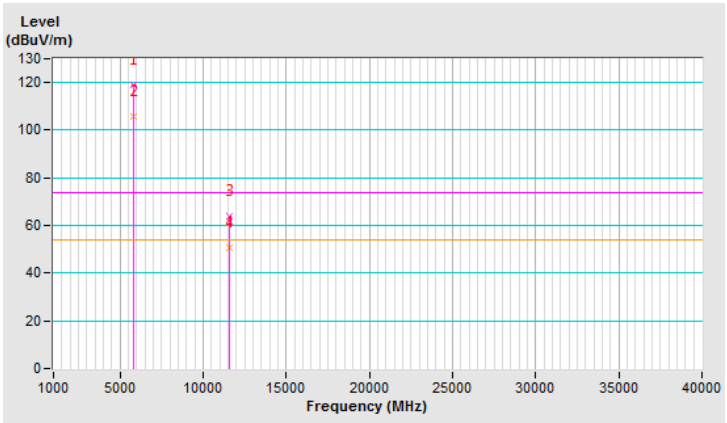


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA-MIMO
基 本 波 頻 率 ：	CH 157：5785 MHz (OOBE)	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 06 月 27 日	測 試 者 ：	張家誠

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5636.00	65.0 PK	68.2	-3.2	2.14 H	347	52.3	12.7
2	#5963.20	65.5 PK	68.2	-2.7	2.14 H	347	51.8	13.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)..
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)..
3. Margin value = Emission Level – Limit value..
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

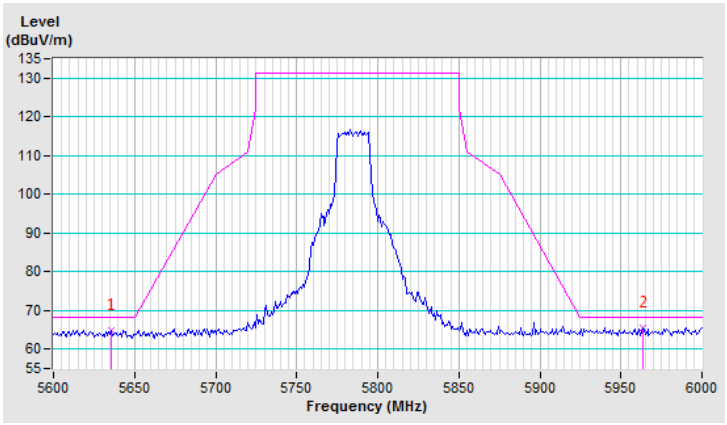


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA-MIMO
基 本 波 頻 率 ：	CH 157：5785 MHz (OOBE)	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 06 月 27 日	測 試 者 ：	張家誠

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5624.00	65.4 PK	68.2	-2.8	2.00 V	33	52.7	12.7
2	#5942.40	65.0 PK	68.2	-3.2	2.00 V	33	51.4	13.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)..
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)..
3. Margin value = Emission Level – Limit value..
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

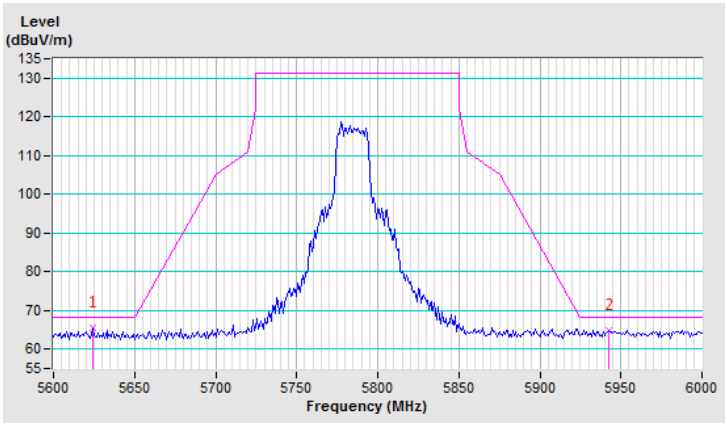


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA-MIMO
基 本 波 頻 率 ：	CH 165：5825 MHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 06 月 27 日	測 試 者 ：	張家誠

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5825.00	120.2 PK			3.36 H	360	77.6	42.6
2	*5825.00	107.3 AV			3.36 H	360	64.7	42.6
3	11650.00	63.4 PK	74.0	-10.6	2.56 H	211	39.8	23.6
4	11650.00	50.6 AV	54.0	-3.4	2.56 H	211	27.0	23.6
5	#17475.00	-	-	-	-	-	-	-
6	#23300.00	-	-	-	-	-	-	-
7	#29125.00	-	-	-	-	-	-	-
8	#34950.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)..
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)..
3. Margin value = Emission Level – Limit value..
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

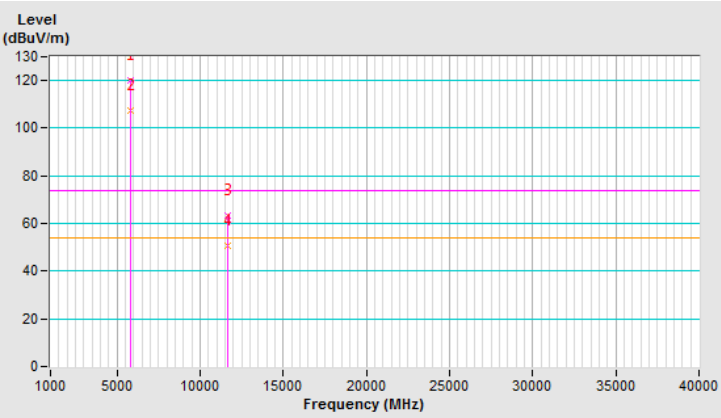


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA-MIMO
基 本 波 頻 率 ：	CH 165：5825 MHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 06 月 27 日	測 試 者 ：	張家誠

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5825.00	119.1 PK			1.72 V	35	76.5	42.6
2	*5825.00	106.2 AV			1.72 V	35	63.6	42.6
3	11650.00	63.1 PK	74.0	-10.9	3.29 V	315	39.5	23.6
4	11650.00	50.1 AV	54.0	-3.9	3.29 V	315	26.5	23.6
5	#17475.00	-	-	-	-	-	-	-
6	#23300.00	-	-	-	-	-	-	-
7	#29125.00	-	-	-	-	-	-	-
8	#34950.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)..
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)..
3. Margin value = Emission Level – Limit value..
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

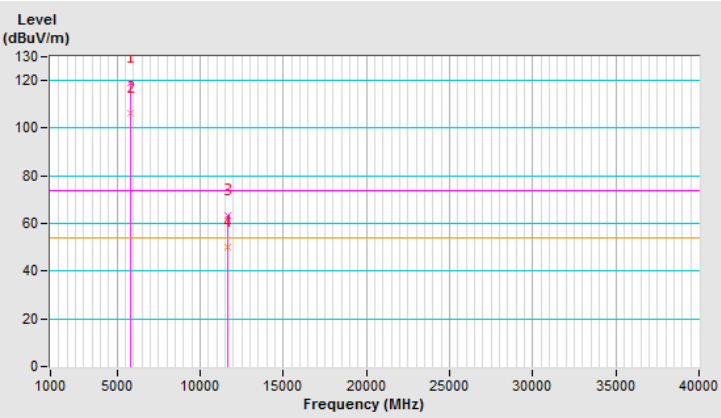


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA-MIMO
基 本 波 頻 率 ：	CH 165：5825 MHz (OOBE)	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 06 月 27 日	測 試 者 ：	張家誠

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5600.00	64.3 PK	68.2	-3.9	3.36 H	360	51.7	12.6
2	#5998.40	66.2 PK	68.2	-2.0	3.36 H	360	52.4	13.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)..
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)..
3. Margin value = Emission Level – Limit value..
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

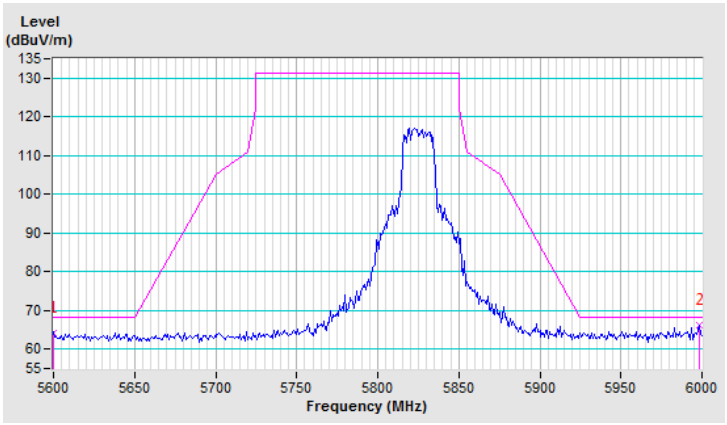


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA-MIMO
基 本 波 頻 率 ：	CH 165：5825 MHz (OOBE)	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 06 月 27 日	測 試 者 ：	張家誠

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5614.40	65.3 PK	68.2	-2.9	1.72 V	35	52.6	12.7
2	#5932.00	65.7 PK	68.2	-2.5	1.72 V	35	52.1	13.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)..
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)..
3. Margin value = Emission Level – Limit value..
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

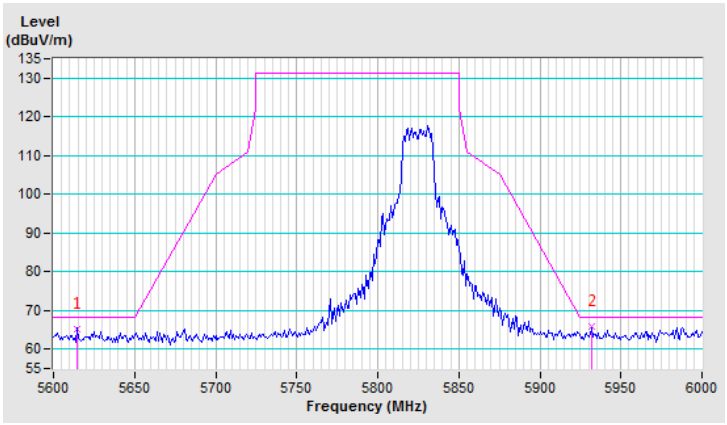


802.11ax (HE40)

操作模式：	發射	調變技術：	OFDMA-MIMO
基本波頻率：	CH 38：5190 MHz	測試儀器：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=3kHz
量測場地溫度：	25℃	量測場地濕度：	70%RH
測試日期：	108 年 06 月 26 日	測試者：	張家誠

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	73.0 PK	74.0	-1.0	1.53 H	31	60.4	12.6
2	5150.00	52.4 AV	54.0	-1.6	1.53 H	31	39.8	12.6
3	*5190.00	111.8 PK			1.26 H	22	70.3	41.5
4	*5190.00	99.5 AV			1.26 H	22	58.0	41.5
5	#10380.00	62.5 PK	68.2	-5.7	2.32 H	299	39.8	22.7
6	15570.00	-	-	-	-	-	-	-
7	20760.00	-	-	-	-	-	-	-
8	#25950.00	-	-	-	-	-	-	-
9	#31140.00	-	-	-	-	-	-	-
10	#36330.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)..
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)..
3. Margin value = Emission Level – Limit value..
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

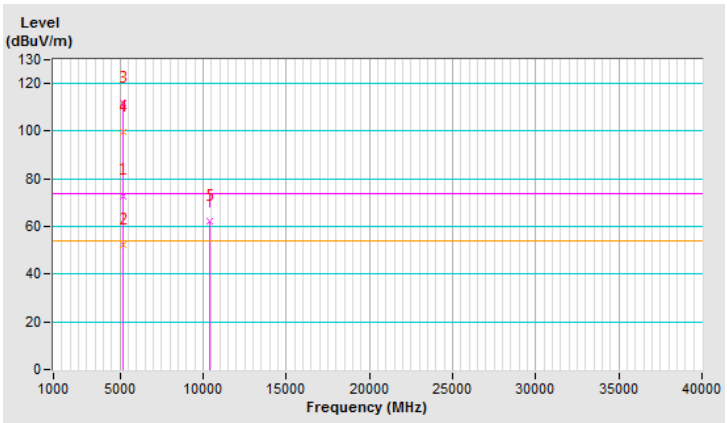


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA-MIMO
基 本 波 頻 率 ：	CH 38：5190 MHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=3kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 07 月 3 日	測 試 者 ：	張家誠

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	70.8 PK	74.0	-3.2	1.21 V	45	58.2	12.6
2	5150.00	50.3 AV	54.0	-3.7	1.21 V	45	37.7	12.6
3	*5190.00	109.8 PK			1.20 V	45	68.3	41.5
4	*5190.00	97.5 AV			1.20 V	45	56.0	41.5
5	#10380.00	62.2 PK	68.2	-6.0	2.19 V	244	39.5	22.7
6	15570.00	-	-	-	-	-	-	-
7	20760.00	-	-	-	-	-	-	-
8	#25950.00	-	-	-	-	-	-	-
9	#31140.00	-	-	-	-	-	-	-
10	#36330.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)..
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)..
3. Margin value = Emission Level – Limit value..
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

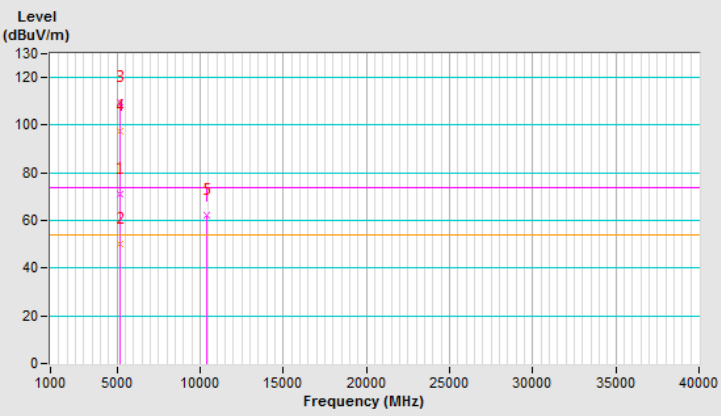


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA-MIMO
基 本 波 頻 率 ：	CH 46：5230 MHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=3kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 06 月 26 日	測 試 者 ：	張家誠

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	65.4 PK	74.0	-8.6	1.88 H	24	52.8	12.6
2	5150.00	52.4 AV	54.0	-1.6	1.88 H	24	39.8	12.6
3	*5230.00	114.5 PK			1.89 H	30	73.2	41.3
4	*5230.00	102.2 AV			1.89 H	30	60.9	41.3
5	#10460.00	62.9 PK	68.2	-5.3	2.99 H	239	40.0	22.9
6	15690.00	-	-	-	-	-	-	-
7	20920.00	-	-	-	-	-	-	-
8	#26150.00	-	-	-	-	-	-	-
9	31380.00	-	-	-	-	-	-	-
10	#36610.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)..
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)..
3. Margin value = Emission Level – Limit value..
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

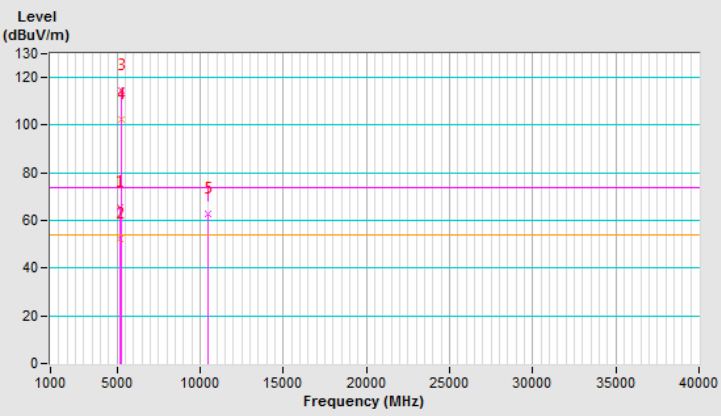


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA-MIMO
基 本 波 頻 率 ：	CH 46：5230 MHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=3kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 07 月 3 日	測 試 者 ：	張家誠

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	63.6 PK	74.0	-10.4	1.02 V	46	51.0	12.6
2	5150.00	50.6 AV	54.0	-3.4	1.02 V	46	38.0	12.6
3	*5230.00	112.5 PK			1.20 V	45	71.2	41.3
4	*5230.00	100.2 AV			1.20 V	45	58.9	41.3
5	#10460.00	62.6 PK	68.2	-5.6	2.31 V	229	39.7	22.9
6	15690.00	-	-	-	-	-	-	-
7	20920.00	-	-	-	-	-	-	-
8	#26150.00	-	-	-	-	-	-	-
9	31380.00	-	-	-	-	-	-	-
10	#36610.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)..
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)..
3. Margin value = Emission Level – Limit value..
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

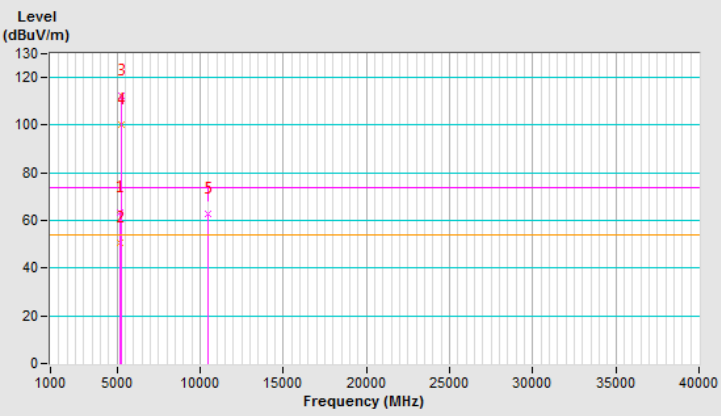


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA-MIMO
基 本 波 頻 率 ：	CH 151：5755 MHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=3kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 06 月 27 日	測 試 者 ：	張家誠

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5755.00	117.4 PK			3.37 H	350	74.9	42.5
2	*5755.00	104.8 AV			3.37 H	350	62.3	42.5
3	11510.00	63.5 PK	74.0	-10.5	2.48 H	229	39.6	23.9
4	11510.00	50.7 AV	54.0	-3.3	2.48 H	229	26.8	23.9
5	#17265.00	-	-	-	-	-	-	-
6	23020.00	-	-	-	-	-	-	-
7	#28775.00	-	-	-	-	-	-	-
8	#34530.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)..
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)..
3. Margin value = Emission Level – Limit value..
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

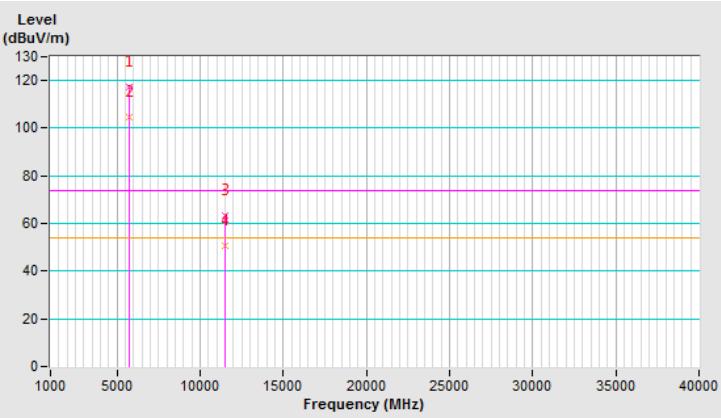


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA-MIMO
基 本 波 頻 率 ：	CH 151：5755 MHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=3kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 06 月 27 日	測 試 者 ：	張家誠

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5755.00	116.4 PK			1.79 V	34	73.9	42.5
2	*5755.00	103.8 AV			1.79 V	34	61.3	42.5
3	11510.00	63.3 PK	74.0	-10.7	2.99 V	215	39.4	23.9
4	11510.00	50.4 AV	54.0	-3.6	2.99 V	215	26.5	23.9
5	#17265.00	-	-	-	-	-	-	-
6	23020.00	-	-	-	-	-	-	-
7	#28775.00	-	-	-	-	-	-	-
8	#34530.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)..
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)..
3. Margin value = Emission Level – Limit value..
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

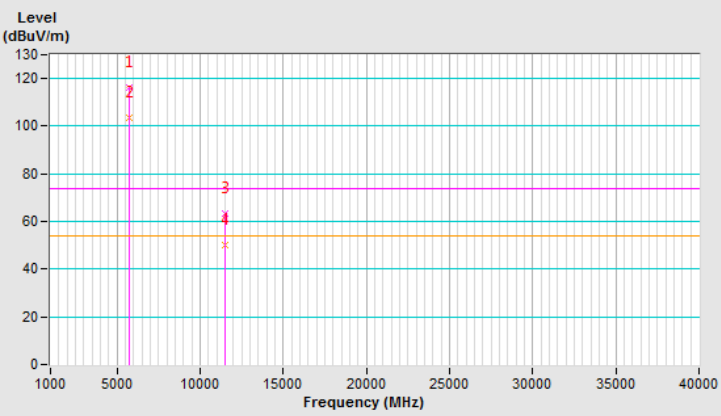


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA-MIMO
基 本 波 頻 率 ：	CH 151：5755 MHz (OOBE)	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=3kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 06 月 27 日	測 試 者 ：	張家誠

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5648.00	66.2 PK	68.2	-2.0	3.37 H	350	53.6	12.6
2	#5952.00	66.4 PK	68.2	-1.8	3.37 H	350	52.8	13.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)..
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)..
3. Margin value = Emission Level – Limit value..
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

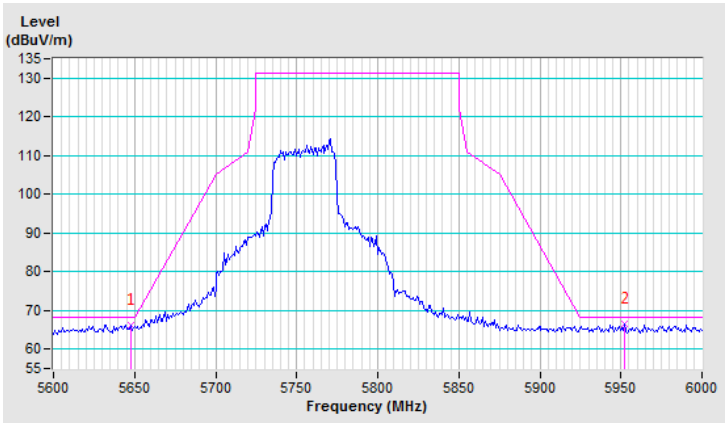


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA-MIMO
基 本 波 頻 率 ：	CH 151：5755 MHz (OOBE)	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=3kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 06 月 27 日	測 試 者 ：	張家誠

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5650.40	65.9 PK	68.5	-2.6	1.79 V	34	53.3	12.6
2	#5998.40	65.4 PK	68.2	-2.8	1.79 V	34	51.6	13.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)..
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)..
3. Margin value = Emission Level – Limit value..
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

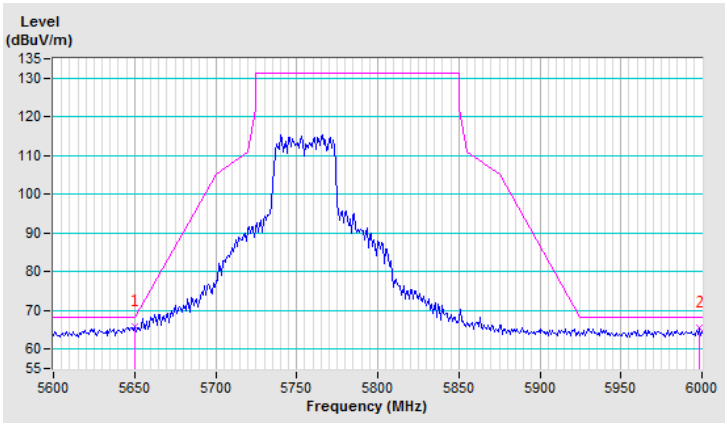


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA-MIMO
基 本 波 頻 率 ：	CH 159：5795 MHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=3kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 06 月 27 日	測 試 者 ：	張家誠

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5795.00	116.3 PK			3.37 H	357	73.7	42.6
2	*5795.00	105.1 AV			3.37 H	357	62.5	42.6
3	11590.00	63.7 PK	74.0	-10.3	2.99 H	244	39.9	23.8
4	11590.00	50.8 AV	54.0	-3.2	2.99 H	244	27.0	23.8
5	#17385.00	-	-	-	-	-	-	-
6	#23180.00	-	-	-	-	-	-	-
7	#28975.00	-	-	-	-	-	-	-
8	#34770.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)..
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)..
3. Margin value = Emission Level – Limit value..
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

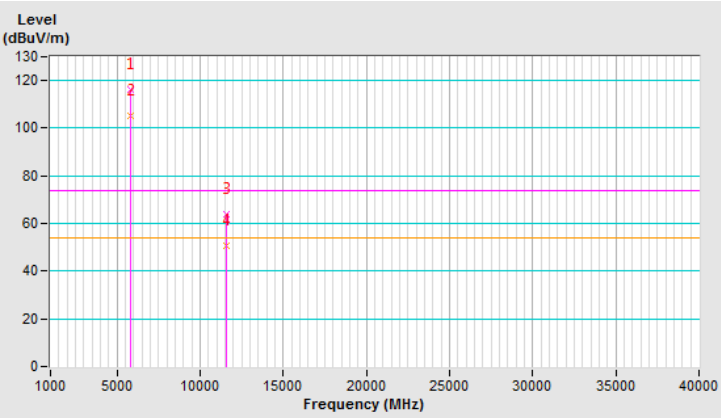


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA-MIMO
基 本 波 頻 率 ：	CH 159：5795 MHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=3kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 06 月 27 日	測 試 者 ：	張家誠

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5795.00	115.3 PK			1.70 V	40	72.7	42.6
2	*5795.00	104.1 AV			1.70 V	40	61.5	42.6
3	11590.00	63.5 PK	74.0	-10.5	3.03 V	333	39.7	23.8
4	11590.00	50.6 AV	54.0	-3.4	3.03 V	333	26.8	23.8
5	#17385.00	-	-	-	-	-	-	-
6	#23180.00	-	-	-	-	-	-	-
7	#28975.00	-	-	-	-	-	-	-
8	#34770.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)..
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)..
3. Margin value = Emission Level – Limit value..
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

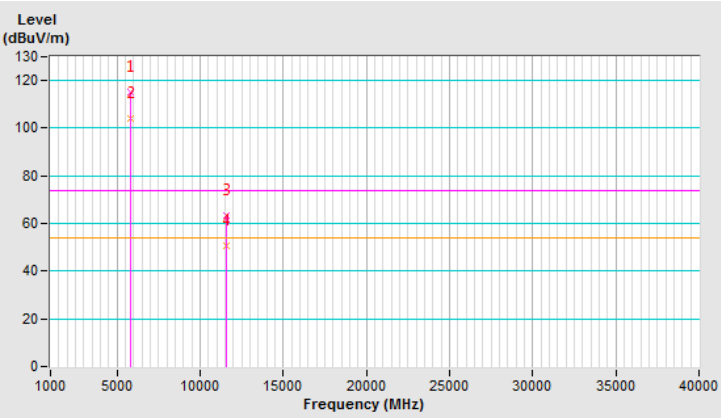


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA-MIMO
基 本 波 頻 率 ：	CH 159：5795 MHz (OOBE)	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=3kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 06 月 27 日	測 試 者 ：	張家誠

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5620.00	65.7 PK	68.2	-2.5	3.37 H	357	53.0	12.7
2	#5996.80	65.4 PK	68.2	-2.8	3.37 H	357	51.6	13.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)..
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)..
3. Margin value = Emission Level – Limit value..
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

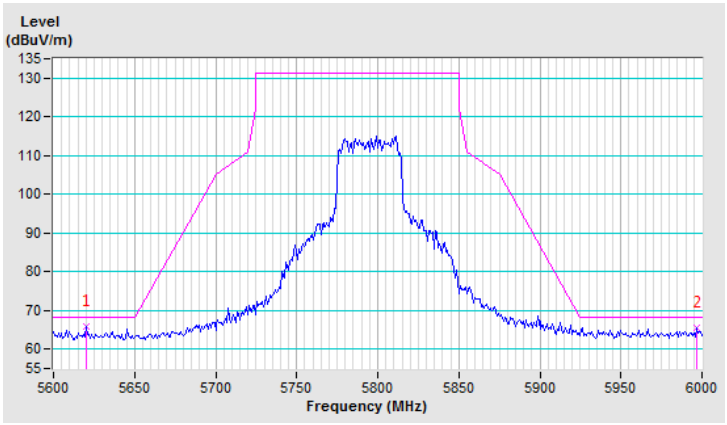


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA-MIMO
基 本 波 頻 率 ：	CH 159：5795 MHz (OOBE)	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=3kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 06 月 27 日	測 試 者 ：	張家誠

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5616.80	64.5 PK	68.2	-3.7	1.70 V	40	51.8	12.7
2	#5952.00	65.8 PK	68.2	-2.4	1.70 V	40	52.2	13.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)..
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)..
3. Margin value = Emission Level – Limit value..
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

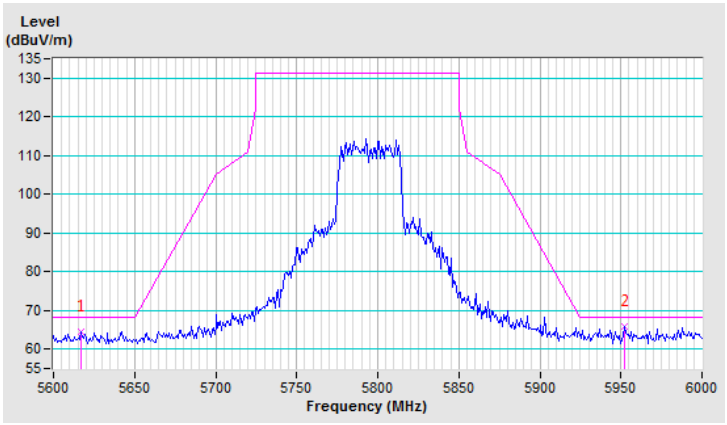


802.11ax (HE80)

操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA-MIMO
基 本 波 頻 率 ：	CH 42：5210 MHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=3kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 06 月 26 日	測 試 者 ：	張家誠

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	69.0 PK	74.0	-5.0	1.49 H	30	56.4	12.6
2	5150.00	52.3 AV	54.0	-1.7	1.49 H	30	39.7	12.6
3	*5210.00	108.2 PK			1.44 H	22	66.8	41.4
4	*5210.00	95.0 AV			1.44 H	22	53.6	41.4
5	5350.00	60.2 PK	74.0	-13.8	1.40 H	59	47.8	12.4
6	5350.00	48.0 AV	54.0	-6.0	1.40 H	59	35.6	12.4
7	#10420.00	62.9 PK	68.2	-5.3	2.99 H	231	40.1	22.8
8	15630.00	-	-	-	-	-	-	-
9	20840.00	-	-	-	-	-	-	-
10	#26050.00	-	-	-	-	-	-	-
11	31260.00	-	-	-	-	-	-	-
12	36470.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)..
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)..
3. Margin value = Emission Level – Limit value..
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

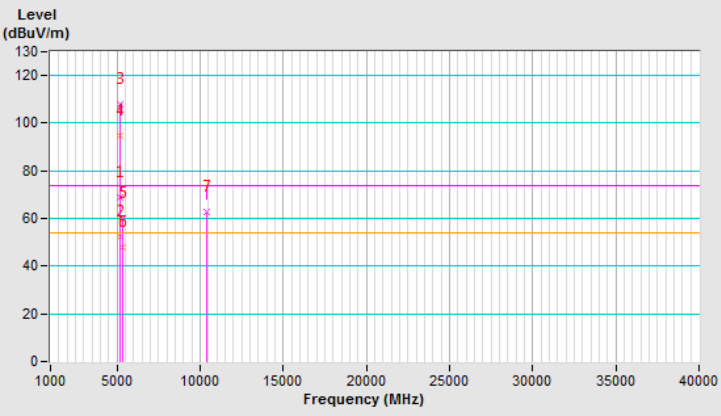


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA-MIMO
基 本 波 頻 率 ：	CH 42：5210 MHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=3kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 07 月 3 日	測 試 者 ：	張家誠

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	66.7 PK	74.0	-7.3	1.17 V	53	54.1	12.6
2	5150.00	50.4 AV	54.0	-3.6	1.17 V	53	37.8	12.6
3	*5210.00	106.2 PK			1.00 V	41	64.8	41.4
4	*5210.00	93.0 AV			1.00 V	41	51.6	41.4
5	5350.00	59.9 PK	74.0	-14.1	1.09 V	55	47.5	12.4
6	5350.00	47.7 AV	54.0	-6.3	1.09 V	55	35.3	12.4
7	#10420.00	62.6 PK	68.2	-5.6	3.09 V	315	39.8	22.8
8	15630.00	-	-	-	-	-	-	-
9	20840.00	-	-	-	-	-	-	-
10	#26050.00	-	-	-	-	-	-	-
11	31260.00	-	-	-	-	-	-	-
12	36470.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)..
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)..
3. Margin value = Emission Level – Limit value..
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

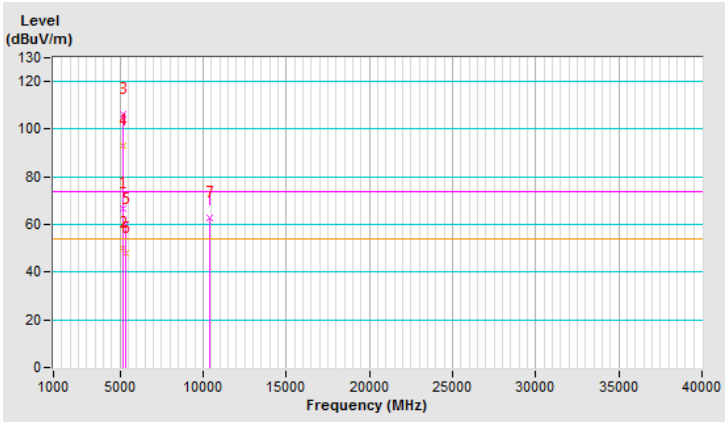


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA-MIMO
基 本 波 頻 率 ：	CH 155：5775 MHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=3kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 06 月 27 日	測 試 者 ：	張家誠

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5775.00	113.1 PK			3.37 H	346	70.5	42.6
2	*5775.00	99.4 AV			3.37 H	346	56.8	42.6
3	11550.00	63.6 PK	74.0	-10.4	3.15 H	302	39.7	23.9
4	11550.00	50.7 AV	54.0	-3.3	3.15 H	302	26.8	23.9
5	#17325.00	-	-	-	-	-	-	-
6	23100.00	-	-	-	-	-	-	-
7	#28875.00	-	-	-	-	-	-	-
8	#34650.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)..
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)..
3. Margin value = Emission Level – Limit value..
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

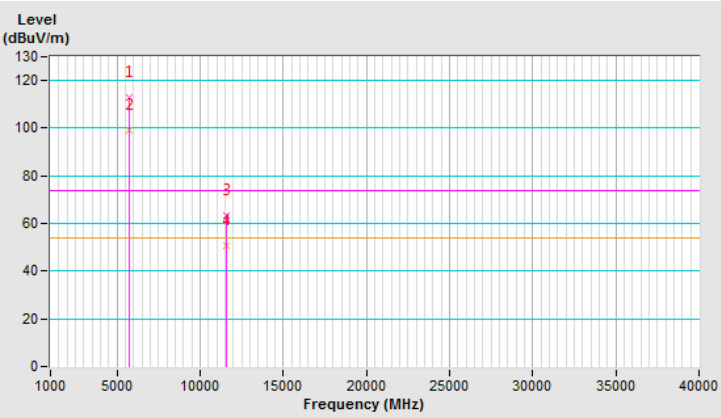


操作模式：	發射	調變技術：	OFDMA-MIMO
基本波頻率：	CH 155：5775 MHz	測試儀器：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=3kHz
量測場地溫度：	25℃	量測場地濕度：	70%RH
測試日期：	108 年 06 月 27 日	測試者：	張家誠

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5775.00	112.4 PK			1.78 V	33	69.8	42.6
2	*5775.00	98.6 AV			1.78 V	33	56.0	42.6
3	11550.00	63.4 PK	74.0	-10.6	2.66 V	233	39.5	23.9
4	11550.00	50.4 AV	54.0	-3.6	2.66 V	233	26.5	23.9
5	#17325.00	-	-	-	-	-	-	-
6	23100.00	-	-	-	-	-	-	-
7	#28875.00	-	-	-	-	-	-	-
8	#34650.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)..
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)..
3. Margin value = Emission Level – Limit value..
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

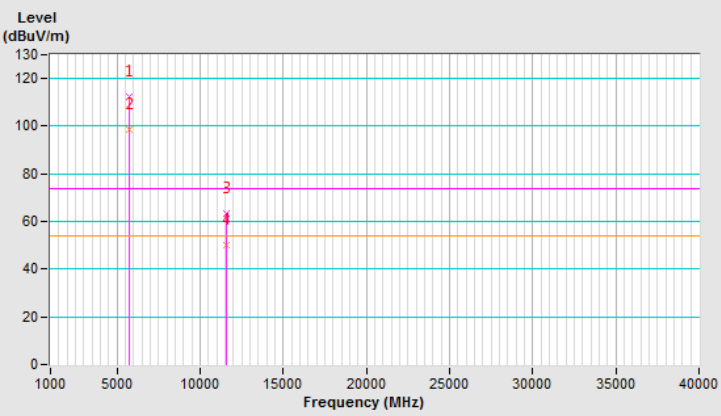


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA-MIMO
基 本 波 頻 率 ：	CH 155：5775 MHz (OOBE)	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=3kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 06 月 27 日	測 試 者 ：	張家誠

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5630.40	66.6 PK	68.2	-1.6	3.37 H	346	53.9	12.7
2	#5933.60	65.2 PK	68.2	-3.0	3.37 H	346	51.6	13.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)..
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)..
3. Margin value = Emission Level – Limit value..
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

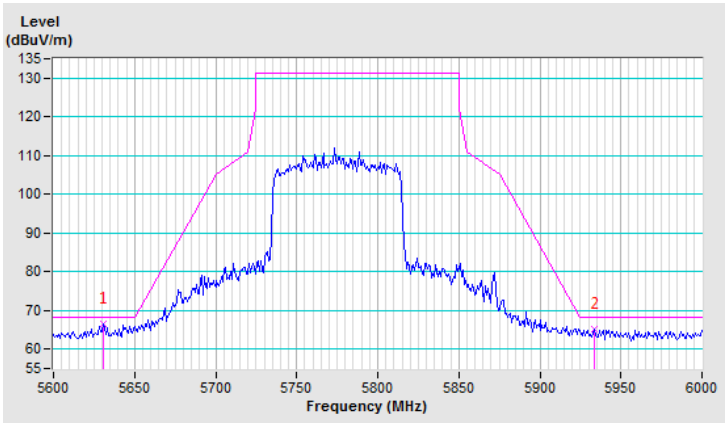


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA-MIMO
基 本 波 頻 率 ：	CH 155：5775 MHz (OOBE)	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=3kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 06 月 27 日	測 試 者 ：	張家誠

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5650.40	66.1 PK	68.5	-2.4	1.78 V	33	53.5	12.6
2	#5943.20	66.5 PK	68.2	-1.7	1.78 V	33	52.9	13.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)..
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)..
3. Margin value = Emission Level – Limit value..
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

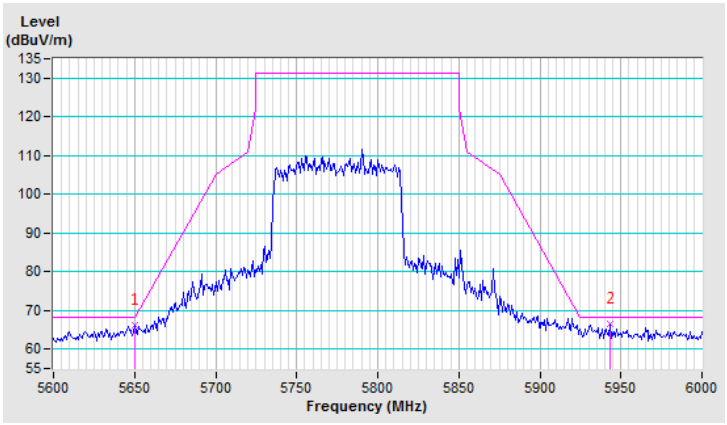

4.6.2 接收諧波

Test Mode A - AP43 (Internal antenna) + Eth6 Radio + POE


802.11a

操 作 模 式 ：	接收		
基 本 波 頻 率 ：	CH 165：5825 MHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 10 月 03 日	測 試 者 ：	李哲銘

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	7766.00	60.0 PK	74.0	-14.0	1.49 H	265	41.5	18.5
2	7766.00	46.8 AV	54.0	-7.2	1.49 H	265	28.3	18.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.

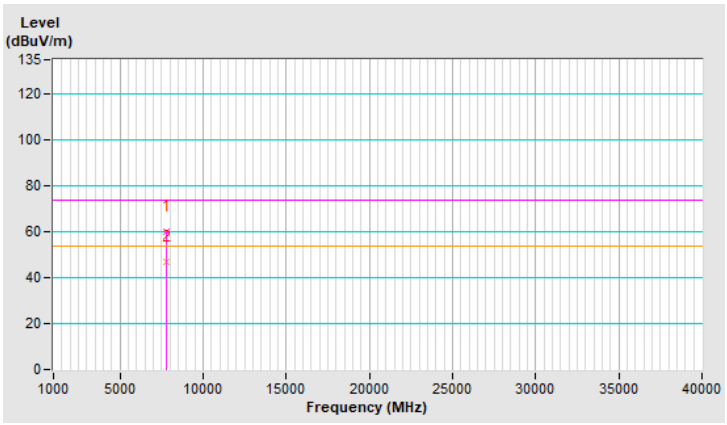


操 作 模 式 ：	接收		
基 本 波 頻 率 ：	CH 165：5825 MHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 10 月 03 日	測 試 者 ：	李哲銘

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	7766.00	58.7 PK	74.0	-15.3	1.98 V	129	40.2	18.5
2	7766.00	45.0 AV	54.0	-9.0	1.98 V	129	26.5	18.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.

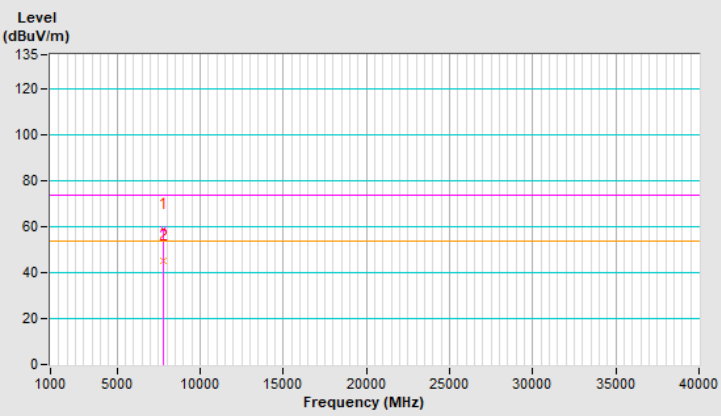

Test Mode C - AP43 (Internal antenna) + Eth7 Radio + POE


802.11ax (HE20)

操 作 模 式 ：	接收		
基 本 波 頻 率 ：	CH 149：5745 MHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 10 月 03 日	測 試 者 ：	李哲銘

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	3830.00	55.1 PK	74.0	-18.9	1.20 H	320	46.2	8.9
2	3830.00	40.9 AV	54.0	-13.1	1.20 H	320	32.0	8.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.

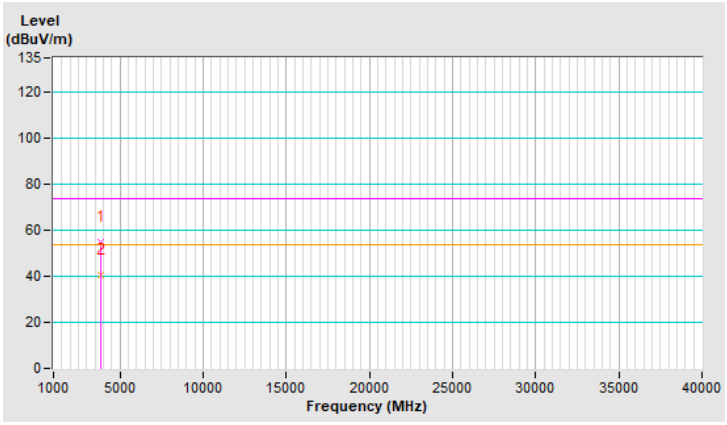


操 作 模 式 ：	接收		
基 本 波 頻 率 ：	CH 149：5745 MHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 10 月 03 日	測 試 者 ：	李哲銘

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	3830.00	52.6 PK	74.0	-21.4	2.00 V	224	43.7	8.9
2	3830.00	39.2 AV	54.0	-14.8	2.00 V	224	30.3	8.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.

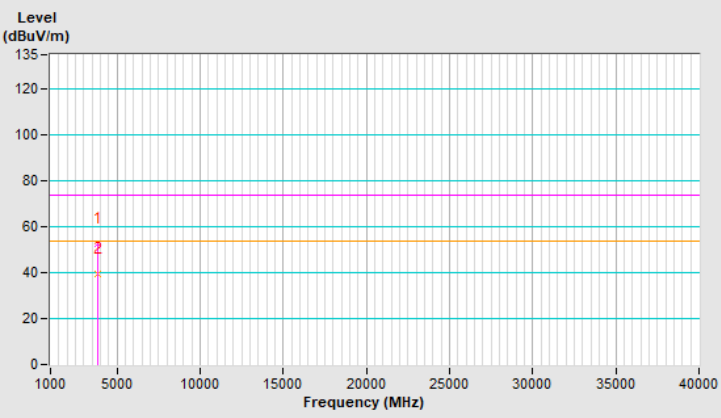

Test Mode E - AP43 (Internal antenna) + Eth8 Radio + POE


802.11ax (HE20)

操 作 模 式 ：	接收		
基 本 波 頻 率 ：	CH 149：5745 MHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 10 月 03 日	測 試 者 ：	李哲銘

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	11490.00	64.9 PK	74.0	-9.1	1.44 H	222	40.9	24.0
2	11490.00	52.1 AV	54.0	-1.9	1.44 H	222	28.1	24.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.

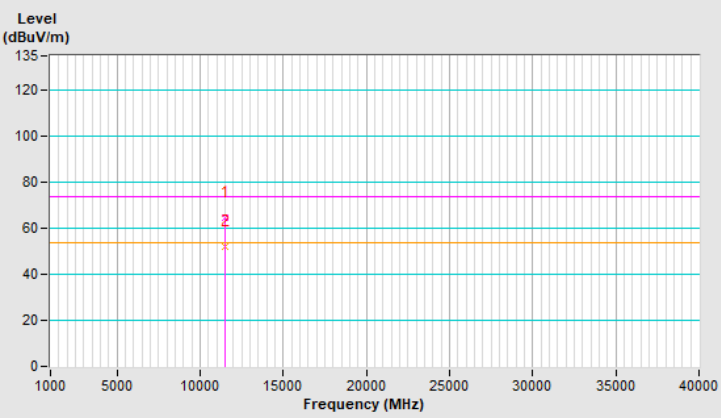


操 作 模 式 ：	接收		
基 本 波 頻 率 ：	CH 149：5745 MHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 10 月 03 日	測 試 者 ：	李哲銘

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	11490.00	62.9 PK	74.0	-11.1	1.24 V	0	38.9	24.0
2	11490.00	50.3 AV	54.0	-3.7	1.24 V	0	26.3	24.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.

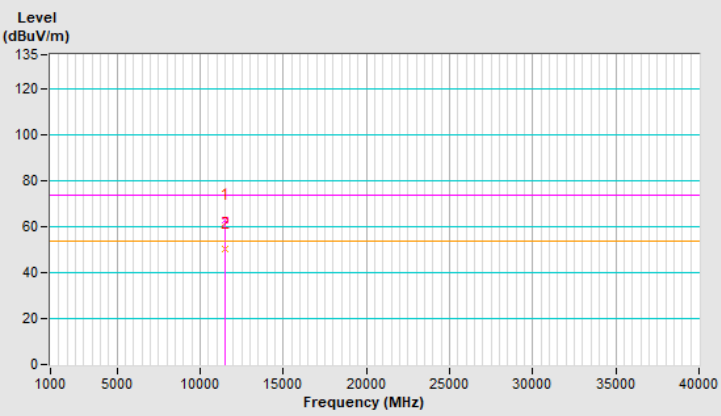

Test Mode G - AP43E (External antenna - PN: ATS-OO-245-46-4RPSP-36) + Eth6 Radio + POE


802.11a

操 作 模 式 ：	接收		
基 本 波 頻 率 ：	CH 165：5825 MHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 10 月 03 日	測 試 者 ：	李哲銘

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	7660.00	60.2 PK	74.0	-13.8	1.69 H	222	41.9	18.3
2	7660.00	47.9 AV	54.0	-6.1	1.69 H	222	29.6	18.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.

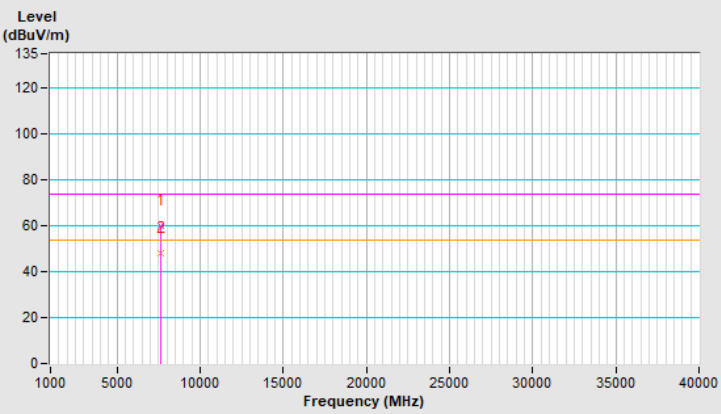


操 作 模 式 ：	接收		
基 本 波 頻 率 ：	CH 165：5825 MHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 10 月 03 日	測 試 者 ：	李哲銘

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	7660.00	58.5 PK	74.0	-15.5	2.15 V	101	40.2	18.3
2	7660.00	46.4 AV	54.0	-7.6	2.15 V	101	28.1	18.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.

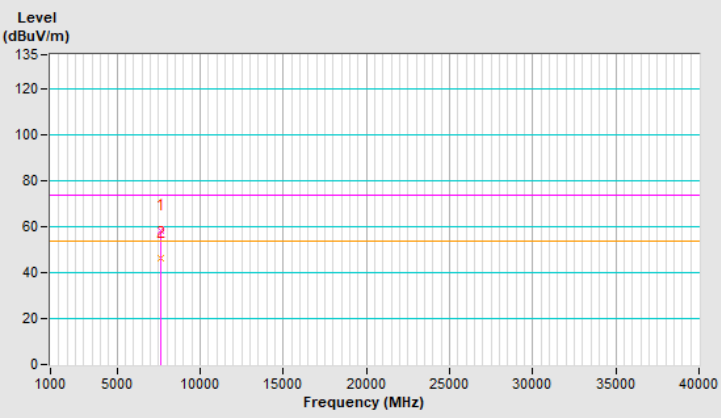

Test Mode I - AP43E (External antenna - PN: ATS-OO-245-46-4RPSP-36) + Eth7 Radio + POE


802.11ax (HE20)

操 作 模 式 ：	接收		
基 本 波 頻 率 ：	CH 149：5745 MHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 10 月 03 日	測 試 者 ：	李哲銘

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	3493.00	49.5 PK	74.0	-24.5	1.82 H	123	42.0	7.5
2	3493.00	37.1 AV	54.0	-16.9	1.82 H	123	29.6	7.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.

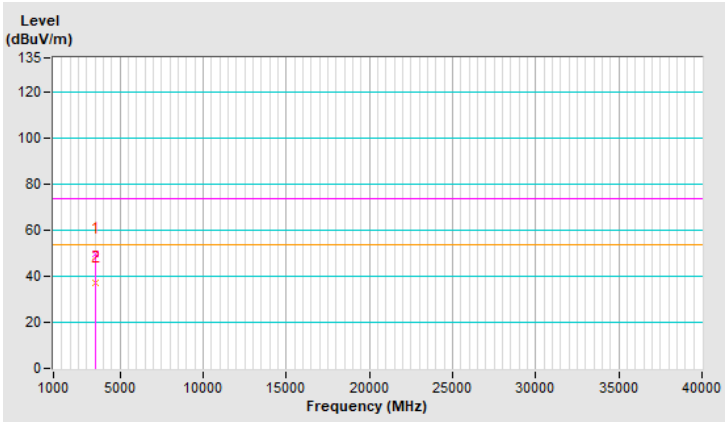


操 作 模 式 ：	接收		
基 本 波 頻 率 ：	CH 149：5745 MHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 10 月 03 日	測 試 者 ：	李哲銘

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	3493.00	51.9 PK	74.0	-22.1	2.42 V	323	44.4	7.5
2	3493.00	38.8 AV	54.0	-15.2	2.42 V	323	31.3	7.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.

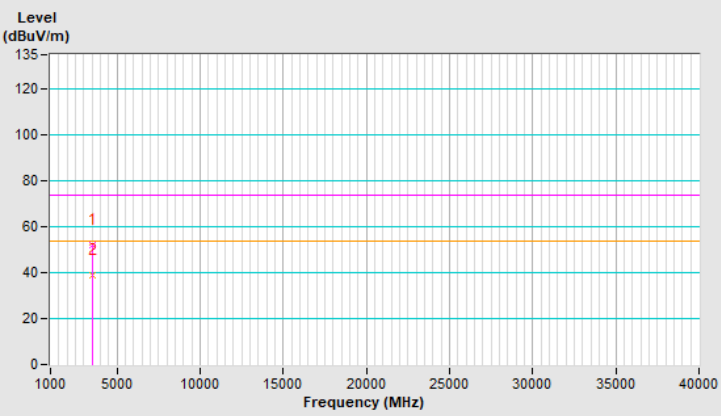

Test Mode K - AP43E (External antenna – PN: ATS-OP-245-810-4RPSP-36) + Eth6 Radio + POE


802.11ax (HE40)

操 作 模 式 ：	接收		
基 本 波 頻 率 ：	CH 159：5795 MHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=3kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	109 年 04 月 20 日	測 試 者 ：	張家誠

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	3863.00	44.6 PK	74.0	-29.4	4.00 H	266	39.5	5.1
2	3863.00	32.2 AV	54.0	-21.8	4.00 H	266	27.1	5.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.

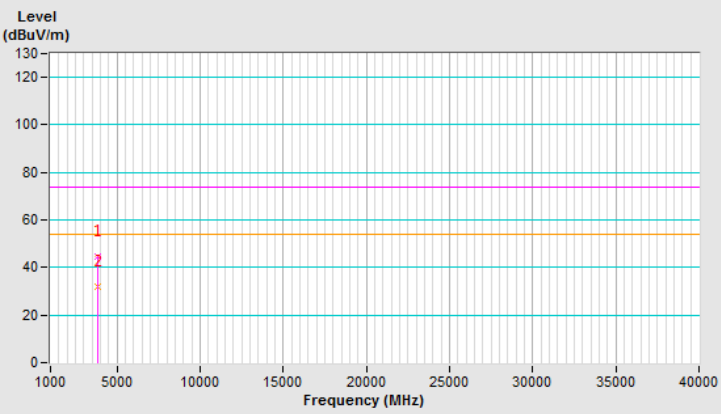


操 作 模 式 ：	接收		
基 本 波 頻 率 ：	CH 159：5795 MHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=3kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	109 年 04 月 20 日	測 試 者 ：	張家誠

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	3863.00	44.9 PK	74.0	-29.1	1.69 V	120	39.8	5.1
2	3863.00	32.5 AV	54.0	-21.5	1.69 V	120	27.4	5.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.

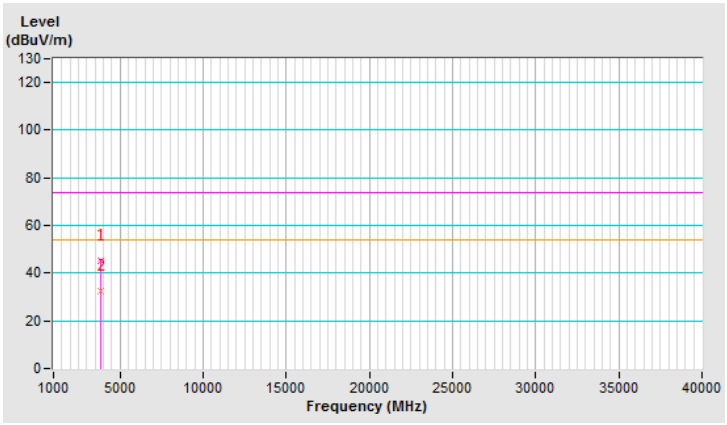

Test Mode M - AP43E (External antenna – PN: ATS-OP-245-810-4RPSP-36) + Eth7 Radio + POE


802.11ax (HE20)

操 作 模 式 ：	接收		
基 本 波 頻 率 ：	CH 40：5200 MHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	109 年 04 月 20 日	測 試 者 ：	張家誠

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	3466.00	42.7 PK	74.0	-31.3	2.25 H	211	39.3	3.4
2	3466.00	30.5 AV	54.0	-23.5	2.25 H	211	27.1	3.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.

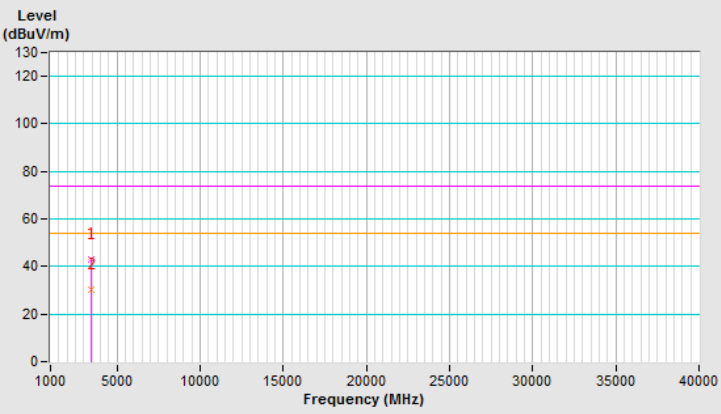


操 作 模 式 ：	接收		
基 本 波 頻 率 ：	CH 40：5200 MHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	109 年 04 月 20 日	測 試 者 ：	張家誠

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	3466.00	43.1 PK	74.0	-30.9	1.33 V	105	39.7	3.4
2	3466.00	30.6 AV	54.0	-23.4	1.33 V	105	27.2	3.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.

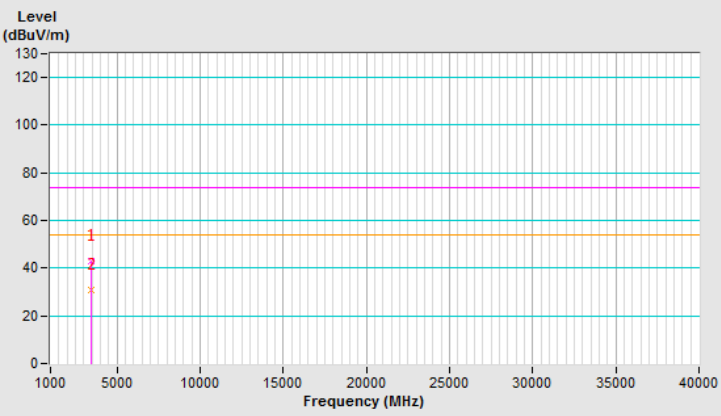

4.6.3 其它不必要之訊號

Test Mode A - AP43 (Internal antenna) + Eth6 Radio + POE


802.11a

操作模式：	發射/接收	調變技術：	OFDM
基本波頻率：	CH 165：5825 MHz	測試儀器：	(QP) RB=120kHz
量測場地溫度：	25℃	量測場地濕度：	70%RH
測試日期：	108 年 04 月 16 日	測試者：	李哲銘

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	152.39	31.5 QP	43.5	-12.0	1.00 H	220	40.2	-8.7
2	175.72	37.5 QP	43.5	-6.0	1.00 H	58	47.3	-9.8
3	237.94	29.7 QP	46.0	-16.3	1.00 H	90	39.6	-9.9
4	304.04	36.4 QP	46.0	-9.6	1.00 H	175	44.3	-7.9
5	455.70	30.4 QP	46.0	-15.6	1.00 H	190	35.9	-5.5
6	712.35	29.8 QP	46.0	-16.2	1.00 H	141	30.0	-0.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. The other emission levels were very low against the limit of frequency range 30MHz ~ 1000MHz.
4. Margin value = Emission Level – Limit value.
5. The emission levels were very low against the limit of frequency range 9kHz ~ 30MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

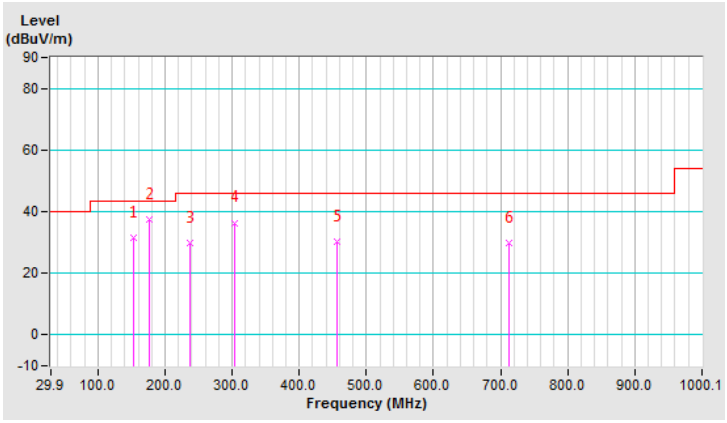


操 作 模 式 ：	發射/接收	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 165：5825 MHz	測 試 儀 器 ：	(QP) RB=120kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 04 月 16 日	測 試 者 ：	李哲銘

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	103.78	25.3 QP	43.5	-18.2	1.00 V	264	38.0	-12.7
2	111.56	36.2 QP	43.5	-7.3	1.00 V	70	48.1	-11.9
3	265.16	33.6 QP	46.0	-12.4	1.00 V	90	42.6	-9.0
4	342.93	41.7 QP	46.0	-4.3	1.00 V	164	49.1	-7.4
5	574.30	33.8 QP	46.0	-12.2	1.00 V	107	37.3	-3.5
6	671.52	30.8 QP	46.0	-15.2	1.00 V	104	32.0	-1.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. The other emission levels were very low against the limit of frequency range 30MHz ~ 1000MHz.
4. Margin value = Emission Level – Limit value.
5. The emission levels were very low against the limit of frequency range 9kHz ~ 30MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

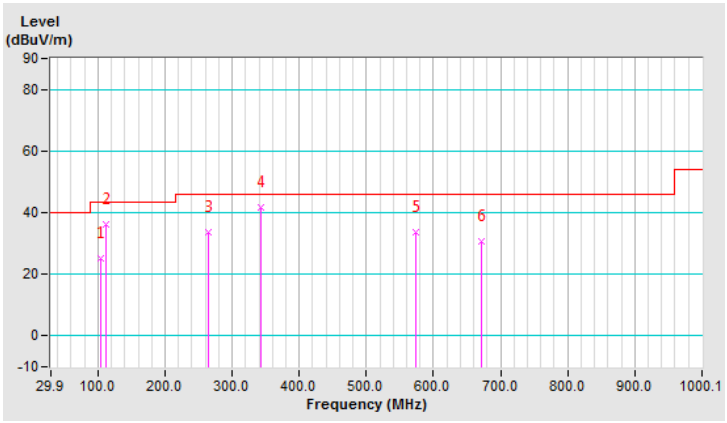

Test Mode B - AP43 (Internal antenna) + Eth6 Radio + Adapter


802.11a

操 作 模 式 ：	發射/接收	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 165：5825 MHz	測 試 儀 器 ：	(QP) RB=120kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 04 月 16 日	測 試 者 ：	李哲銘

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	160.17	37.4 QP	43.5	-6.1	1.50 H	69	46.3	-8.9
2	175.72	38.8 QP	43.5	-4.7	1.50 H	245	48.6	-9.8
3	183.50	36.9 QP	43.5	-6.6	1.50 H	79	47.5	-10.6
4	372.09	42.7 QP	46.0	-3.3	1.01 H	112	49.7	-7.0
5	570.41	36.6 QP	46.0	-9.4	1.50 H	347	40.2	-3.6
6	848.45	29.5 QP	46.0	-16.5	1.50 H	220	27.0	2.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. The other emission levels were very low against the limit of frequency range 30MHz ~ 1000MHz.
4. Margin value = Emission Level – Limit value.
5. The emission levels were very low against the limit of frequency range 9kHz ~ 30MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

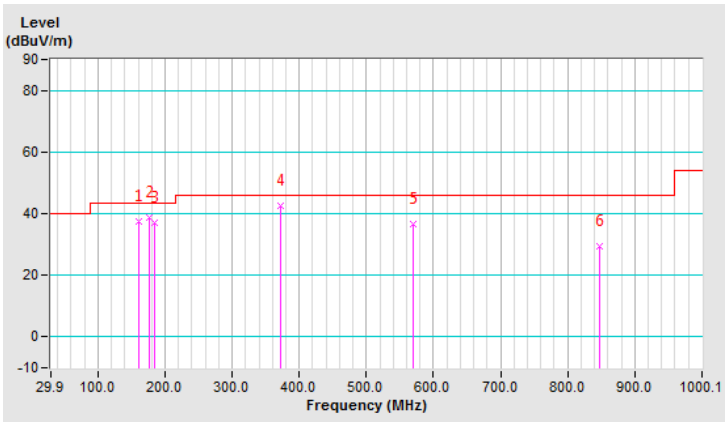


操 作 模 式 ：	發射/接收	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 165：5825 MHz	測 試 儀 器 ：	(QP) RB=120kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 04 月 16 日	測 試 者 ：	李哲銘

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	111.56	32.6 QP	43.5	-10.9	1.50 V	311	44.5	-11.9
2	342.93	34.2 QP	46.0	-11.8	1.50 V	122	41.6	-7.4
3	410.98	35.2 QP	46.0	-10.8	1.00 V	275	41.6	-6.4
4	445.98	32.7 QP	46.0	-13.3	1.00 V	214	38.5	-5.8
5	556.80	34.6 QP	46.0	-11.4	1.00 V	104	38.7	-4.1
6	869.83	29.7 QP	46.0	-16.3	1.00 V	182	27.0	2.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. The other emission levels were very low against the limit of frequency range 30MHz ~ 1000MHz.
4. Margin value = Emission Level – Limit value.
5. The emission levels were very low against the limit of frequency range 9kHz ~ 30MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

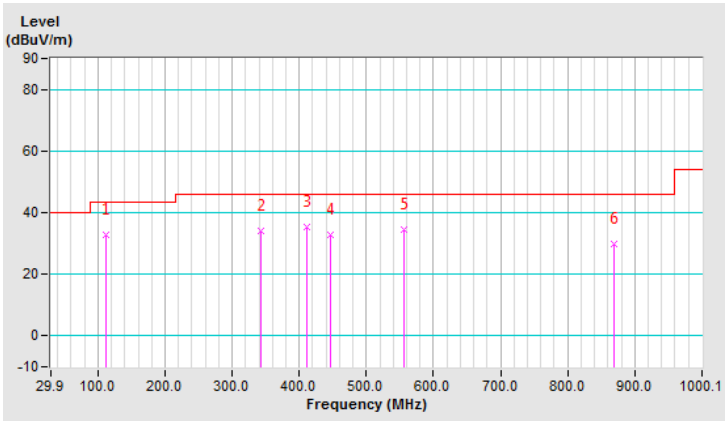

Test Mode C - AP43 (Internal antenna) + Eth7 Radio + POE


802.11ax (HE20)

操作模式：	發射/接收	調變技術：	OFDMA-MIMO
基本波頻率：	CH 149：5745 MHz	測試儀器：	(QP) RB=120kHz
量測場地溫度：	25℃	量測場地濕度：	70%RH
測試日期：	108 年 04 月 16 日	測試者：	李哲銘

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	111.56	36.5 QP	43.5	-7.0	1.50 H	68	48.4	-11.9
2	160.17	36.2 QP	43.5	-7.3	1.00 H	64	45.1	-8.9
3	175.72	37.1 QP	43.5	-6.4	1.00 H	75	46.9	-9.8
4	255.44	33.6 QP	46.0	-12.4	1.50 H	100	42.9	-9.3
5	414.87	37.8 QP	46.0	-8.2	1.00 H	189	44.2	-6.4
6	482.92	26.3 QP	46.0	-19.7	1.00 H	215	31.6	-5.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. The other emission levels were very low against the limit of frequency range 30MHz ~ 1000MHz.
4. Margin value = Emission Level – Limit value.
5. The emission levels were very low against the limit of frequency range 9kHz ~ 30MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

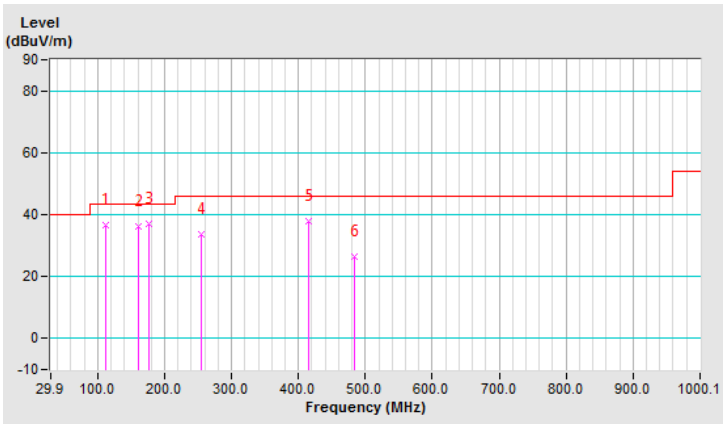


操 作 模 式 ：	發射/接收	調 變 技 術 ：	OFDMA-MIMO
基 本 波 頻 率 ：	CH 149：5745 MHz	測 試 儀 器 ：	(QP) RB=120kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 04 月 16 日	測 試 者 ：	李哲銘

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	127.11	28.7 QP	43.5	-14.8	1.00 V	64	39.3	-10.6
2	152.39	30.8 QP	43.5	-12.7	2.00 V	62	39.5	-8.7
3	183.50	34.3 QP	43.5	-9.2	1.00 V	98	44.9	-10.6
4	309.88	37.4 QP	46.0	-8.6	1.50 V	168	45.2	-7.8
5	344.87	41.7 QP	46.0	-4.3	1.50 V	183	49.1	-7.4
6	832.89	30.7 QP	46.0	-15.3	1.00 V	166	28.4	2.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. The other emission levels were very low against the limit of frequency range 30MHz ~ 1000MHz.
4. Margin value = Emission Level – Limit value.
5. The emission levels were very low against the limit of frequency range 9kHz ~ 30MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

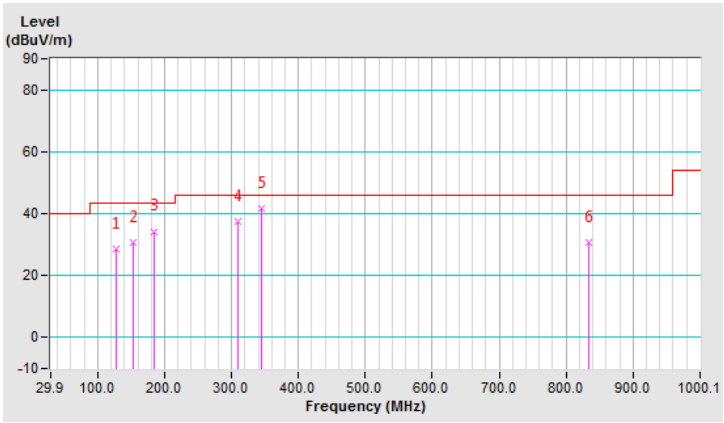

Test Mode D - AP43 (Internal antenna) + Eth7 Radio + Adapter


802.11ax (HE20)

操作模式 :	發射/接收	調變技術 :	OFDMA-MIMO
基本波頻率 :	CH 149：5745 MHz	測試儀器 :	(QP) RB=120kHz
量測場地溫度 :	25℃	量測場地濕度 :	70%RH
測試日期 :	108 年 04 月 16 日	測試者 :	李哲銘

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	111.56	40.5 QP	43.5	-3.0	1.49 H	64	52.4	-11.9
2	175.72	39.4 QP	43.5	-4.1	1.49 H	255	49.2	-9.8
3	183.50	35.6 QP	43.5	-7.9	1.49 H	75	46.2	-10.6
4	372.09	42.6 QP	46.0	-3.4	1.00 H	100	49.6	-7.0
5	574.30	36.6 QP	46.0	-9.4	1.49 H	117	40.1	-3.5
6	747.34	33.2 QP	46.0	-12.8	1.00 H	138	32.3	0.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. The other emission levels were very low against the limit of frequency range 30MHz ~ 1000MHz.
4. Margin value = Emission Level – Limit value.
5. The emission levels were very low against the limit of frequency range 9kHz ~ 30MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

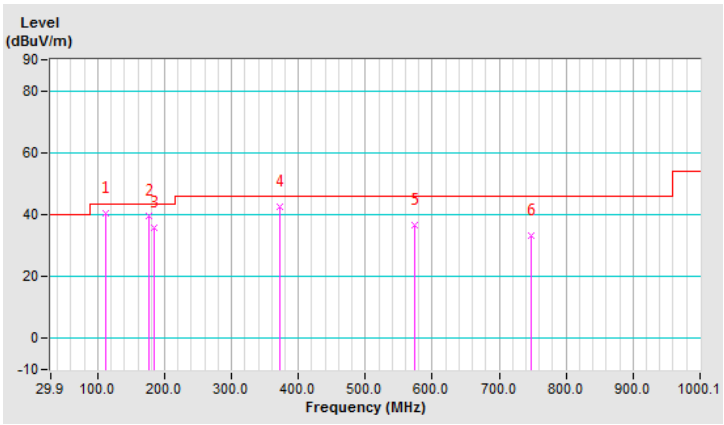


操 作 模 式 ：	發射/接收	調 變 技 術 ：	OFDMA-MIMO
基 本 波 頻 率 ：	CH 149：5745 MHz	測 試 儀 器 ：	(QP) RB=120kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 04 月 16 日	測 試 者 ：	李哲銘

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	103.78	31.8 QP	43.5	-11.7	1.00 V	7	44.5	-12.7
2	175.72	33.7 QP	43.5	-9.8	1.00 V	214	43.5	-9.8
3	342.93	34.8 QP	46.0	-11.2	1.00 V	117	42.2	-7.4
4	368.21	36.3 QP	46.0	-9.7	1.50 V	195	43.3	-7.0
5	564.58	34.6 QP	46.0	-11.4	1.00 V	100	38.5	-3.9
6	729.84	35.5 QP	46.0	-10.5	1.50 V	112	35.2	0.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. The other emission levels were very low against the limit of frequency range 30MHz ~ 1000MHz.
4. Margin value = Emission Level – Limit value.
5. The emission levels were very low against the limit of frequency range 9kHz ~ 30MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

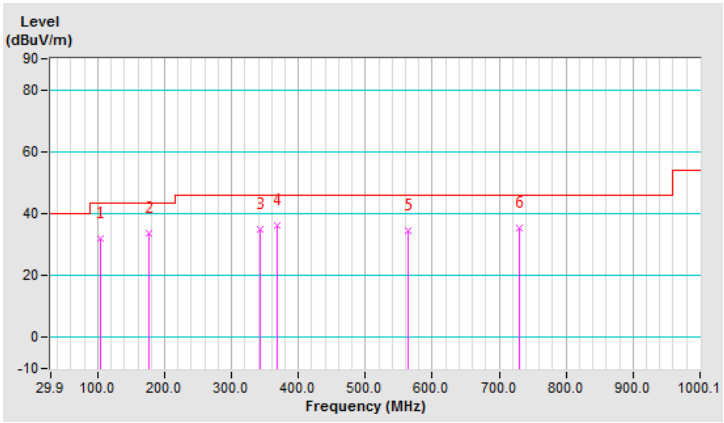

Test Mode E - AP43 (Internal antenna) + Eth8 Radio + POE


802.11ax (HE20)

操 作 模 式 ：	發射/接收	調 變 技 術 ：	OFDMA-MIMO
基 本 波 頻 率 ：	CH 149：5745 MHz	測 試 儀 器 ：	(QP) RB=120kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 04 月 16 日	測 試 者 ：	李哲銘

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	111.56	36.5 QP	43.5	-7.0	1.00 H	87	48.4	-11.9
2	175.72	37.0 QP	43.5	-6.5	1.00 H	81	46.8	-9.8
3	342.93	41.6 QP	46.0	-4.4	1.00 H	166	49.0	-7.4
4	410.98	40.0 QP	46.0	-6.0	1.00 H	181	46.4	-6.4
5	570.41	34.0 QP	46.0	-12.0	1.00 H	98	37.6	-3.6
6	836.78	29.4 QP	46.0	-16.6	1.00 H	254	27.0	2.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. The other emission levels were very low against the limit of frequency range 30MHz ~ 1000MHz.
4. Margin value = Emission Level – Limit value.
5. The emission levels were very low against the limit of frequency range 9kHz ~ 30MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

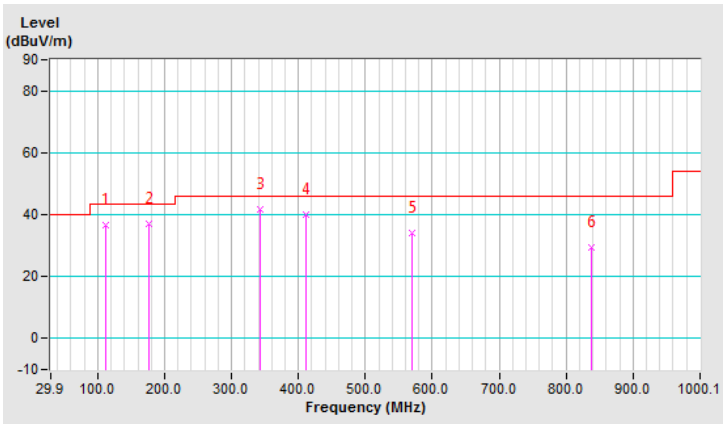


操 作 模 式 ：	發射/接收	調 變 技 術 ：	OFDMA-MIMO
基 本 波 頻 率 ：	CH 149：5745 MHz	測 試 儀 器 ：	(QP) RB=120kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 04 月 16 日	測 試 者 ：	李哲銘

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	160.17	35.8 QP	43.5	-7.7	1.00 V	70	44.7	-8.9
2	183.50	34.4 QP	43.5	-9.1	1.50 V	73	45.0	-10.6
3	368.21	42.2 QP	46.0	-3.8	1.00 V	107	49.2	-7.0
4	617.08	31.5 QP	46.0	-14.5	1.00 V	98	33.5	-2.0
5	657.91	30.0 QP	46.0	-16.0	1.50 V	111	31.4	-1.4
6	799.84	30.1 QP	46.0	-15.9	1.00 V	130	28.4	1.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. The other emission levels were very low against the limit of frequency range 30MHz ~ 1000MHz.
4. Margin value = Emission Level – Limit value.
5. The emission levels were very low against the limit of frequency range 9kHz ~ 30MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

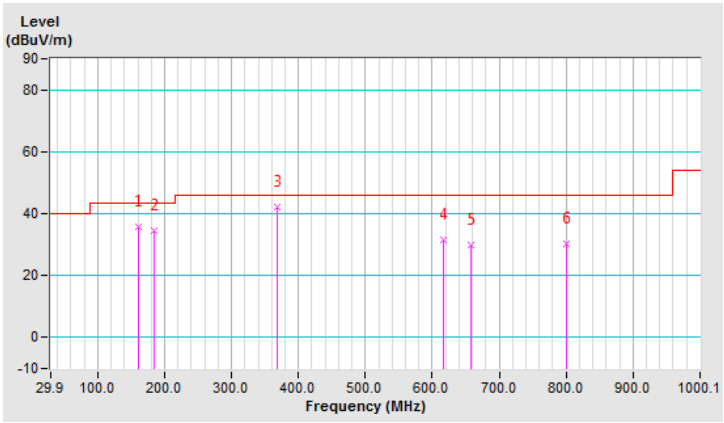

Test Mode F - AP43 (Internal antenna) + Eth8 Radio + Adapter


802.11ax (HE20)

操 作 模 式 ：	發射/接收	調 變 技 術 ：	OFDMA-MIMO
基 本 波 頻 率 ：	CH 149：5745 MHz	測 試 儀 器 ：	(QP) RB=120kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 04 月 16 日	測 試 者 ：	李哲銘

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	111.56	37.2 QP	43.5	-6.3	1.50 H	58	49.1	-11.9
2	160.17	33.6 QP	43.5	-9.9	2.00 H	51	42.5	-8.9
3	323.49	39.7 QP	46.0	-6.3	1.00 H	163	47.1	-7.4
4	407.09	39.3 QP	46.0	-6.7	1.00 H	192	45.8	-6.5
5	564.58	34.5 QP	46.0	-11.5	1.00 H	104	38.4	-3.9
6	891.22	30.0 QP	46.0	-16.0	1.00 H	6	26.8	3.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. The other emission levels were very low against the limit of frequency range 30MHz ~ 1000MHz.
4. Margin value = Emission Level – Limit value.
5. The emission levels were very low against the limit of frequency range 9kHz ~ 30MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

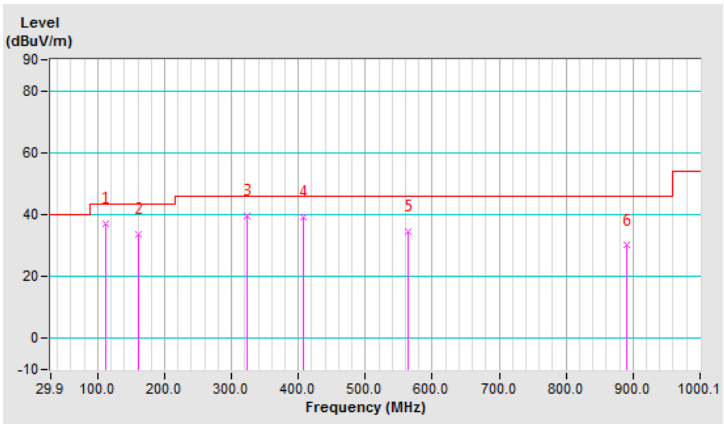


操 作 模 式 ：	發射/接收	調 變 技 術 ：	OFDMA-MIMO
基 本 波 頻 率 ：	CH 149：5745 MHz	測 試 儀 器 ：	(QP) RB=120kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 04 月 16 日	測 試 者 ：	李哲銘

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	111.56	32.1 QP	43.5	-11.4	1.50 V	290	44.0	-11.9
2	160.17	30.4 QP	43.5	-13.1	1.00 V	284	39.3	-8.9
3	342.93	34.8 QP	46.0	-11.2	1.00 V	104	42.2	-7.4
4	434.31	34.3 QP	46.0	-11.7	2.00 V	200	40.2	-5.9
5	558.75	33.9 QP	46.0	-12.1	1.50 V	116	38.0	-4.1
6	867.89	29.7 QP	46.0	-16.3	1.00 V	28	27.0	2.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. The other emission levels were very low against the limit of frequency range 30MHz ~ 1000MHz.
4. Margin value = Emission Level – Limit value.
5. The emission levels were very low against the limit of frequency range 9kHz ~ 30MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

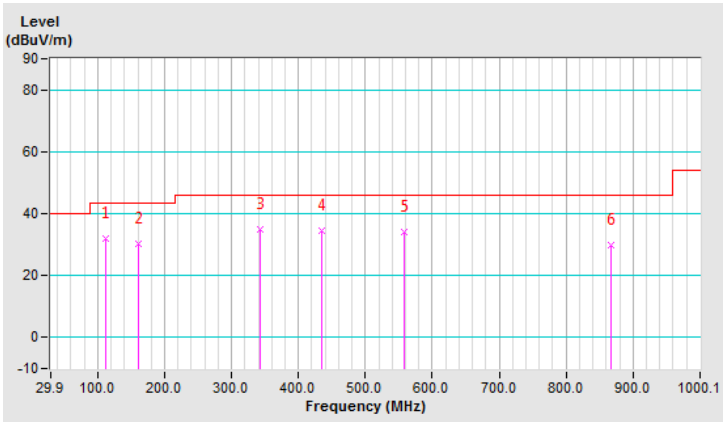

Test Mode G - AP43E (External antenna - PN: ATS-OO-245-46-4RPSP-36) + Eth6 Radio + POE


802.11a

操 作 模 式 ：	發射/接收	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 165：5825 MHz	測 試 儀 器 ：	(QP) RB=120kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 04 月 15 日	測 試 者 ：	李哲銘

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	128.86	35.0 QP	43.5	-8.5	2.00 H	338	45.4	-10.4
2	194.83	36.5 QP	43.5	-7.0	2.00 H	143	47.8	-11.3
3	381.11	36.7 QP	46.0	-9.3	1.01 H	79	43.6	-6.9
4	538.28	38.3 QP	46.0	-7.7	1.51 H	229	42.7	-4.4
5	662.47	33.6 QP	46.0	-12.4	1.01 H	163	35.0	-1.4
6	895.32	39.9 QP	46.0	-6.1	4.00 H	184	36.6	3.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. The other emission levels were very low against the limit of frequency range 30MHz ~ 1000MHz.
4. Margin value = Emission Level – Limit value.
5. The emission levels were very low against the limit of frequency range 9kHz ~ 30MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

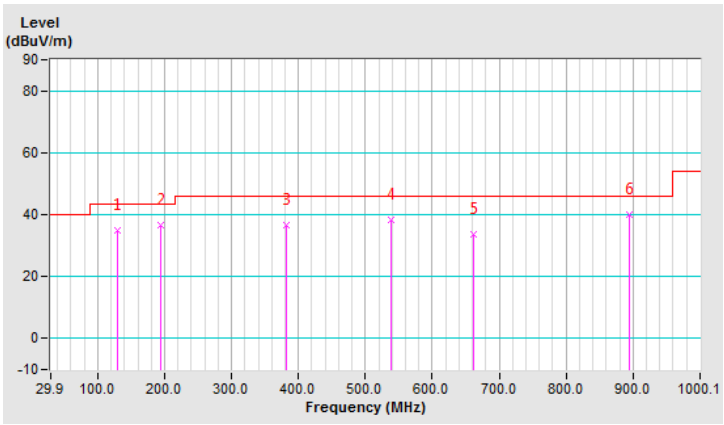


操 作 模 式 ：	發射/接收	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 165：5825 MHz	測 試 儀 器 ：	(QP) RB=120kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 04 月 15 日	測 試 者 ：	李哲銘

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	103.64	32.5 QP	43.5	-11.0	1.00 V	233	45.2	-12.7
2	194.83	29.2 QP	43.5	-14.3	2.00 V	203	40.5	-11.3
3	222.00	30.0 QP	46.0	-16.0	1.00 V	12	41.0	-11.0
4	365.59	36.6 QP	46.0	-9.4	1.49 V	272	43.7	-7.1
5	565.45	32.0 QP	46.0	-14.0	1.00 V	294	35.8	-3.8
6	792.48	32.9 QP	46.0	-13.1	1.49 V	12	31.2	1.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. The other emission levels were very low against the limit of frequency range 30MHz ~ 1000MHz.
4. Margin value = Emission Level – Limit value.
5. The emission levels were very low against the limit of frequency range 9kHz ~ 30MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

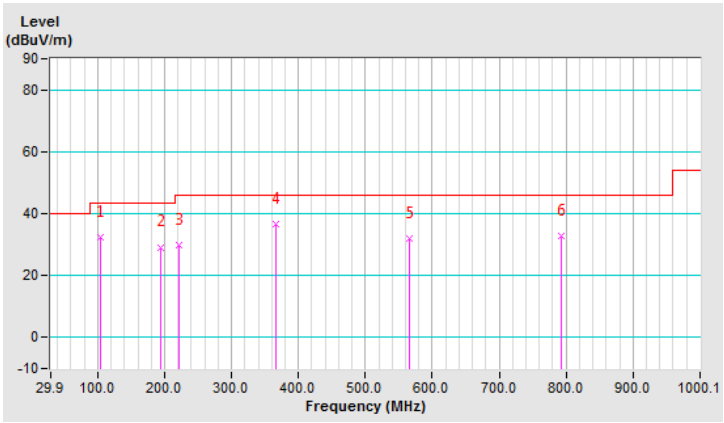

Test Mode H - AP43E (External antenna - PN: ATS-OO-245-46-4RPSP-36) + Eth6 Radio + Adapter


802.11a

操 作 模 式 ：	發射/接收	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 165：5825 MHz	測 試 儀 器 ：	(QP) RB=120kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 04 月 16 日	測 試 者 ：	李哲銘

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	160.17	37.2 QP	43.5	-6.3	1.99 H	76	46.1	-8.9
2	175.72	40.0 QP	43.5	-3.5	1.99 H	74	49.8	-9.8
3	344.87	42.8 QP	46.0	-3.2	1.00 H	175	50.2	-7.4
4	370.15	42.3 QP	46.0	-3.7	1.00 H	108	49.3	-7.0
5	556.80	35.4 QP	46.0	-10.6	1.99 H	2	39.5	-4.1
6	933.99	35.5 QP	46.0	-10.5	1.99 H	19	31.6	3.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. The other emission levels were very low against the limit of frequency range 30MHz ~ 1000MHz.
4. Margin value = Emission Level – Limit value.
5. The emission levels were very low against the limit of frequency range 9kHz ~ 30MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

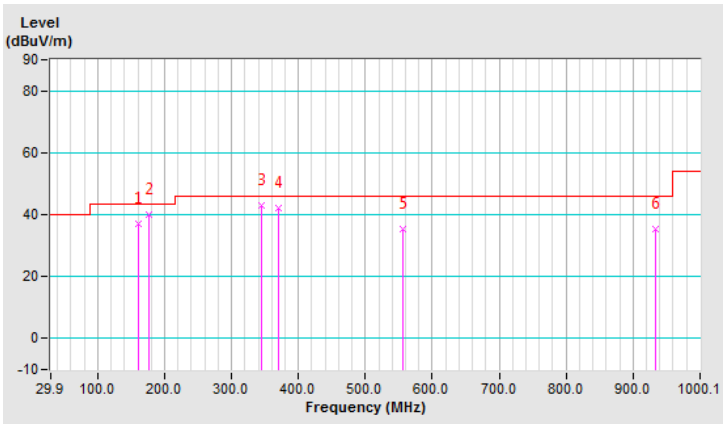


操 作 模 式 ：	發射/接收	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 165：5825 MHz	測 試 儀 器 ：	(QP) RB=120kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 04 月 16 日	測 試 者 ：	李哲銘

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	111.56	36.8 QP	43.5	-6.7	1.00 V	283	48.7	-11.9
2	175.72	34.0 QP	43.5	-9.5	2.00 V	146	43.8	-9.8
3	372.09	36.4 QP	46.0	-9.6	1.00 V	99	43.4	-7.0
4	420.70	36.1 QP	46.0	-9.9	1.00 V	205	42.3	-6.2
5	566.52	34.7 QP	46.0	-11.3	1.00 V	101	38.5	-3.8
6	840.67	30.2 QP	46.0	-15.8	2.00 V	227	27.8	2.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. The other emission levels were very low against the limit of frequency range 30MHz ~ 1000MHz.
4. Margin value = Emission Level – Limit value.
5. The emission levels were very low against the limit of frequency range 9kHz ~ 30MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

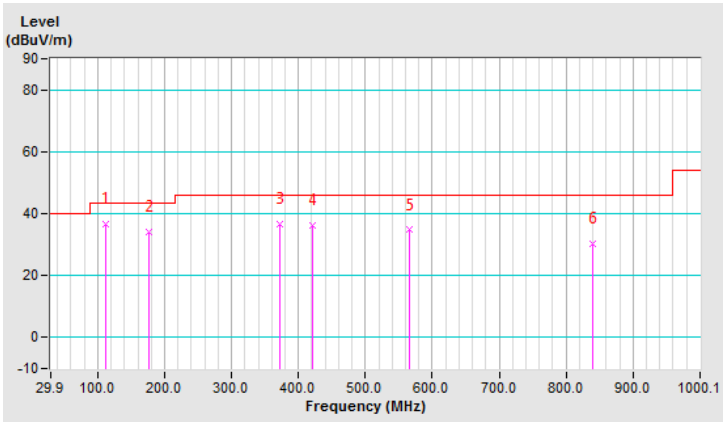

Test Mode I - AP43E (External antenna - PN: ATS-OO-245-46-4RPSP-36) + Eth7 Radio + POE


802.11ax (HE20)

操 作 模 式 ：	發射/接收	調 變 技 術 ：	OFDMA-MIMO
基 本 波 頻 率 ：	CH 149：5745 MHz	測 試 儀 器 ：	(QP) RB=120kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 04 月 15 日	測 試 者 ：	李哲銘

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	103.64	32.1 QP	43.5	-11.4	2.00 H	328	44.8	-12.7
2	132.74	35.2 QP	43.5	-8.3	2.00 H	353	45.0	-9.8
3	196.77	35.8 QP	43.5	-7.7	2.00 H	133	47.1	-11.3
4	243.34	35.7 QP	46.0	-10.3	1.01 H	13	45.3	-9.6
5	305.44	34.4 QP	46.0	-11.6	1.01 H	101	42.3	-7.9
6	390.81	37.9 QP	46.0	-8.1	1.01 H	69	44.6	-6.7
7	817.70	30.7 QP	46.0	-15.3	1.01 H	339	28.6	2.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. The other emission levels were very low against the limit of frequency range 30MHz ~ 1000MHz.
4. Margin value = Emission Level – Limit value.
5. The emission levels were very low against the limit of frequency range 9kHz ~ 30MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

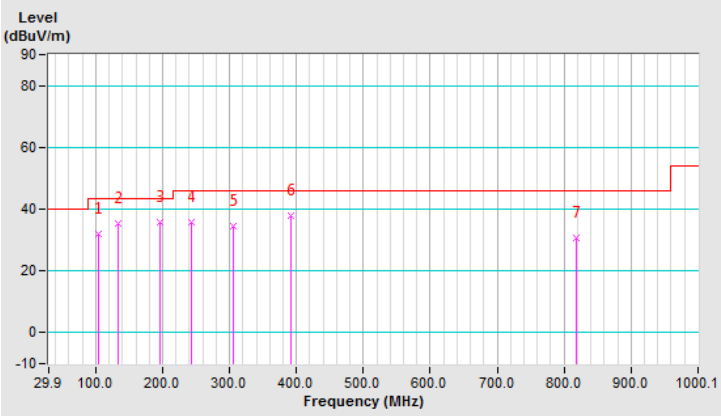


操 作 模 式 ：	發射/接收	調 變 技 術 ：	OFDMA-MIMO
基 本 波 頻 率 ：	CH 149：5745 MHz	測 試 儀 器 ：	(QP) RB=120kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 04 月 15 日	測 試 者 ：	李哲銘

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	103.64	30.5 QP	43.5	-13.0	1.00 V	240	43.2	-12.7
2	183.19	28.8 QP	43.5	-14.7	2.00 V	215	39.4	-10.6
3	220.06	29.3 QP	46.0	-16.7	1.00 V	9	40.3	-11.0
4	388.87	36.5 QP	46.0	-9.5	2.00 V	42	43.2	-6.7
5	575.15	33.0 QP	46.0	-13.0	1.00 V	166	36.4	-3.4
6	831.29	30.2 QP	46.0	-15.8	2.00 V	285	27.9	2.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. The other emission levels were very low against the limit of frequency range 30MHz ~ 1000MHz.
4. Margin value = Emission Level – Limit value.
5. The emission levels were very low against the limit of frequency range 9kHz ~ 30MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

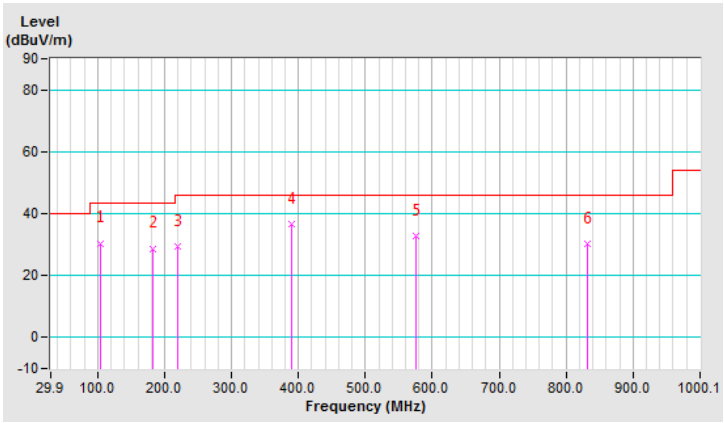

Test Mode J - AP43E (External antenna - PN: ATS-OO-245-46-4RPSP-36) + Eth7 Radio + Adapter


802.11ax (HE20)

操 作 模 式 ：	發射/接收	調 變 技 術 ：	OFDMA-MIMO
基 本 波 頻 率 ：	CH 149：5745 MHz	測 試 儀 器 ：	(QP) RB=120kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 04 月 16 日	測 試 者 ：	李哲銘

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	175.72	40.0 QP	43.5	-3.5	1.50 H	240	49.8	-9.8
2	344.87	41.1 QP	46.0	-4.9	1.00 H	169	48.5	-7.4
3	410.98	40.2 QP	46.0	-5.8	1.00 H	198	46.6	-6.4
4	568.47	36.3 QP	46.0	-9.7	1.50 H	340	40.1	-3.8
5	597.63	34.1 QP	46.0	-11.9	1.50 H	249	36.7	-2.6
6	935.94	38.1 QP	46.0	-7.9	1.50 H	246	34.1	4.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. The other emission levels were very low against the limit of frequency range 30MHz ~ 1000MHz.
4. Margin value = Emission Level – Limit value.
5. The emission levels were very low against the limit of frequency range 9kHz ~ 30MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

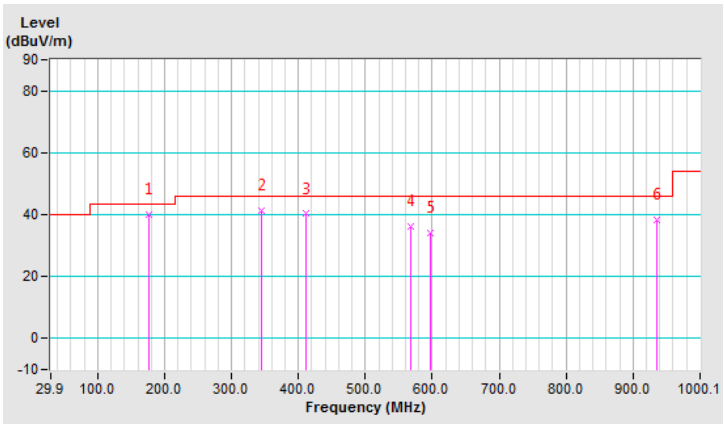


操 作 模 式 ：	發射/接收	調 變 技 術 ：	OFDMA-MIMO
基 本 波 頻 率 ：	CH 149：5745 MHz	測 試 儀 器 ：	(QP) RB=120kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	70%RH
測 試 日 期 ：	108 年 04 月 16 日	測 試 者 ：	李哲銘

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	33.79	34.7 QP	40.0	-5.3	1.50 V	358	45.3	-10.6
2	111.56	34.7 QP	43.5	-8.8	1.50 V	274	46.6	-11.9
3	175.72	32.9 QP	43.5	-10.6	1.50 V	146	42.7	-9.8
4	407.09	34.8 QP	46.0	-11.2	1.00 V	288	41.3	-6.5
5	566.52	34.9 QP	46.0	-11.1	1.00 V	105	38.7	-3.8
6	729.84	34.1 QP	46.0	-11.9	1.00 V	341	33.8	0.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. The other emission levels were very low against the limit of frequency range 30MHz ~ 1000MHz.
4. Margin value = Emission Level – Limit value.
5. The emission levels were very low against the limit of frequency range 9kHz ~ 30MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

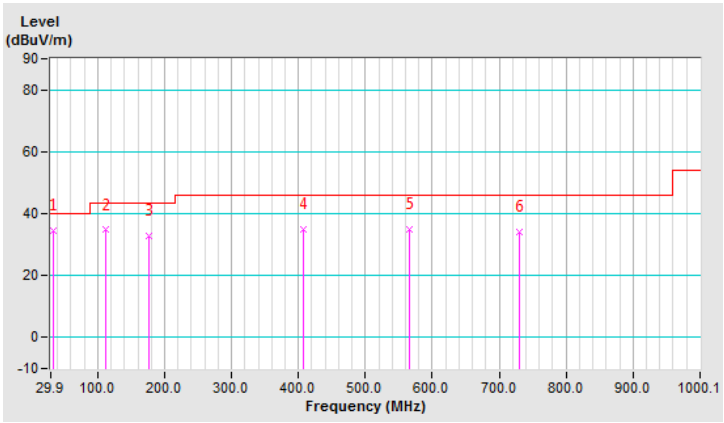

Test Mode K - AP43E (External antenna – PN: ATS-OP-245-810-4RPSP-36) + Eth6 Radio + POE


802.11ax (HE40)

操 作 模 式 ：	發射/接收	調 變 技 術 ：	OFDMA-MIMO
基 本 波 頻 率 ：	CH 159：5795 MHz	測 試 儀 器 ：	(QP) RB=120kHz
量 測 場 地 溫 度 ：	22℃	量 測 場 地 濕 度 ：	71%RH
測 試 日 期 ：	109 年 02 月 17 日	測 試 者 ：	張家誠

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	383.05	39.8 QP	46.0	-6.2	1.50 H	47	45.0	-5.2
2	445.15	37.6 QP	46.0	-8.4	1.00 H	340	41.2	-3.6
3	679.93	37.7 QP	46.0	-8.3	1.00 H	59	35.9	1.8
4	706.13	39.6 QP	46.0	-6.4	1.00 H	147	37.3	2.3
5	798.30	38.0 QP	46.0	-8.0	1.00 H	78	33.2	4.8
6	933.16	37.0 QP	46.0	-9.0	2.00 H	161	29.2	7.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit of frequency range 30MHz~1000MHz.
5. The emission levels were very low against the limit of frequency range 9kHz~30MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

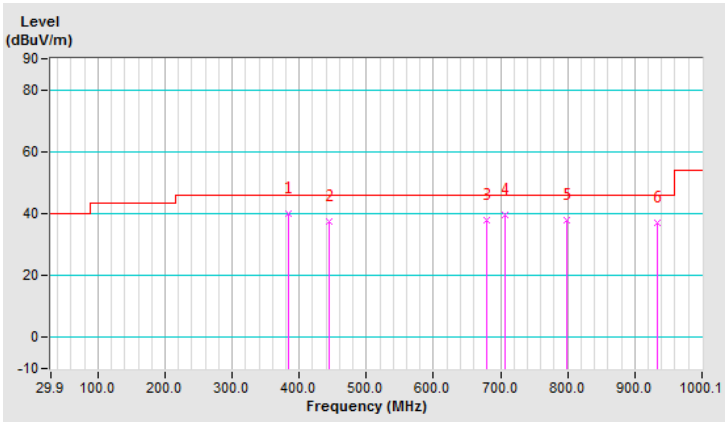


操 作 模 式 ：	發射/接收	調 變 技 術 ：	OFDMA-MIMO
基 本 波 頻 率 ：	CH 159：5795 MHz	測 試 儀 器 ：	(QP) RB=120kHz
量 測 場 地 溫 度 ：	22℃	量 測 場 地 濕 度 ：	71%RH
測 試 日 期 ：	109 年 02 月 17 日	測 試 者 ：	張家誠

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	220.06	33.9 QP	46.0	-12.1	1.50 V	94	45.2	-11.3
2	421.86	40.3 QP	46.0	-5.7	1.00 V	113	44.5	-4.2
3	518.88	31.3 QP	46.0	-14.7	1.00 V	36	33.4	-2.1
4	574.18	37.1 QP	46.0	-8.9	1.00 V	104	38.0	-0.9
5	654.71	36.4 QP	46.0	-9.6	2.00 V	89	35.3	1.1
6	937.04	38.7 QP	46.0	-7.3	1.00 V	134	30.8	7.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit of frequency range 30MHz~1000MHz.
5. The emission levels were very low against the limit of frequency range 9kHz~30MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

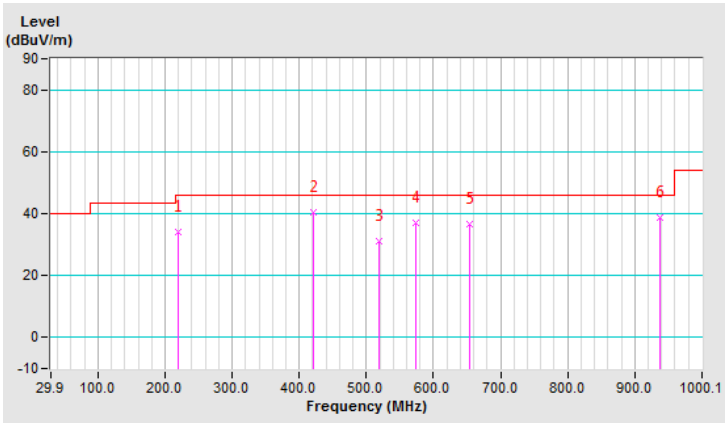

Test Mode L - AP43E (External antenna – PN: ATS-OP-245-810-4RPSP-36) + Eth6 Radio + Adapter


802.11ax (HE40)

操 作 模 式 ：	發射/接收	調 變 技 術 ：	OFDMA-MIMO
基 本 波 頻 率 ：	CH 159：5795 MHz	測 試 儀 器 ：	(QP) RB=120kHz
量 測 場 地 溫 度 ：	22℃	量 測 場 地 濕 度 ：	71%RH
測 試 日 期 ：	109 年 02 月 17 日	測 試 者 ：	張家誠

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	92.96	32.1 QP	43.5	-11.4	1.00 H	135	46.1	-14.0
2	299.62	34.1 QP	46.0	-11.9	1.00 H	196	41.5	-7.4
3	388.87	39.5 QP	46.0	-6.5	1.00 H	49	44.6	-5.1
4	518.88	30.5 QP	46.0	-15.5	1.00 H	331	32.6	-2.1
5	581.94	34.7 QP	46.0	-11.3	1.00 H	139	35.3	-0.6
6	627.54	35.4 QP	46.0	-10.6	1.00 H	72	34.7	0.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit of frequency range 30MHz~1000MHz.
5. The emission levels were very low against the limit of frequency range 9kHz~30MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

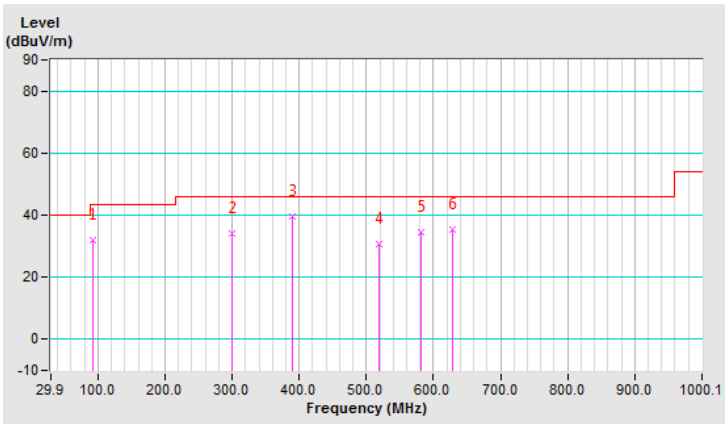


操 作 模 式 ：	發射/接收	調 變 技 術 ：	OFDMA-MIMO
基 本 波 頻 率 ：	CH 159：5795 MHz	測 試 儀 器 ：	(QP) RB=120kHz
量 測 場 地 溫 度 ：	22℃	量 測 場 地 濕 度 ：	71%RH
測 試 日 期 ：	109 年 02 月 17 日	測 試 者 ：	張家誠

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	220.06	33.5 QP	46.0	-12.5	1.50 V	87	44.8	-11.3
2	292.82	38.5 QP	46.0	-7.5	1.00 V	105	46.0	-7.5
3	421.86	40.5 QP	46.0	-5.5	1.00 V	101	44.7	-4.2
4	653.74	35.8 QP	46.0	-10.2	1.00 V	97	34.7	1.1
5	729.41	38.9 QP	46.0	-7.1	2.00 V	83	35.9	3.0
6	938.01	38.0 QP	46.0	-8.0	1.00 V	53	30.1	7.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit of frequency range 30MHz~1000MHz.
5. The emission levels were very low against the limit of frequency range 9kHz~30MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

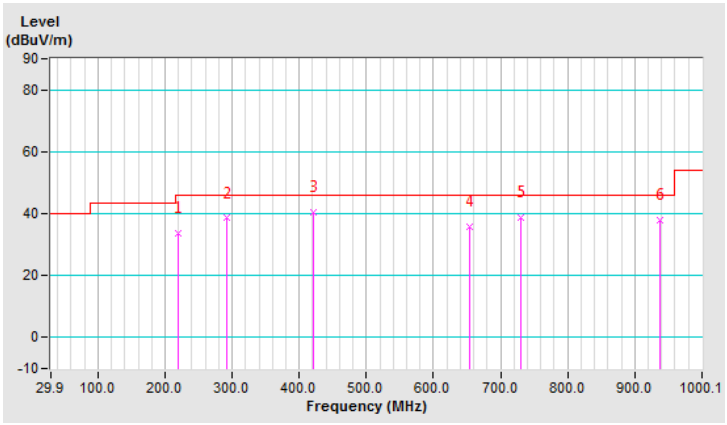

Test Mode M - AP43E (External antenna – PN: ATS-OP-245-810-4RPSP-36) + Eth7 Radio + POE


802.11ax (HE20)

操 作 模 式 ：	發射/接收	調 變 技 術 ：	OFDMA-MIMO
基 本 波 頻 率 ：	CH 40：5200 MHz	測 試 儀 器 ：	(QP) RB=120kHz
量 測 場 地 溫 度 ：	22℃	量 測 場 地 濕 度 ：	71%RH
測 試 日 期 ：	109 年 02 月 17 日	測 試 者 ：	張家誠

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	167.67	36.3 QP	43.5	-7.2	1.00 H	105	45.2	-8.9
2	336.48	37.1 QP	46.0	-8.9	1.00 H	197	43.5	-6.4
3	383.05	40.4 QP	46.0	-5.6	1.00 H	211	45.6	-5.2
4	464.55	35.7 QP	46.0	-10.3	1.00 H	173	38.9	-3.2
5	698.37	39.8 QP	46.0	-6.2	1.00 H	57	37.7	2.1
6	799.27	39.0 QP	46.0	-7.0	1.00 H	130	34.2	4.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit of frequency range 30MHz~1000MHz.
5. The emission levels were very low against the limit of frequency range 9kHz~30MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

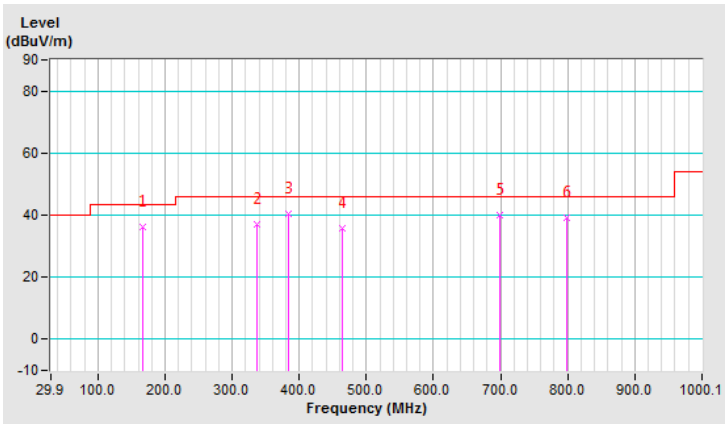


操 作 模 式 ：	發射/接收	調 變 技 術 ：	OFDMA-MIMO
基 本 波 頻 率 ：	CH 40：5200 MHz	測 試 儀 器 ：	(QP) RB=120kHz
量 測 場 地 溫 度 ：	22℃	量 測 場 地 濕 度 ：	71%RH
測 試 日 期 ：	109 年 02 月 17 日	測 試 者 ：	張家誠

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	69.68	34.4 QP	40.0	-5.6	2.00 V	228	44.9	-10.5
2	158.94	34.1 QP	43.5	-9.4	1.00 V	7	42.6	-8.5
3	220.06	33.5 QP	46.0	-12.5	1.00 V	66	44.8	-11.3
4	441.26	39.5 QP	46.0	-6.5	1.00 V	82	43.2	-3.7
5	577.09	38.2 QP	46.0	-7.8	1.50 V	90	39.0	-0.8
6	938.01	39.5 QP	46.0	-6.5	1.00 V	88	31.6	7.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit of frequency range 30MHz~1000MHz.
5. The emission levels were very low against the limit of frequency range 9kHz~30MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

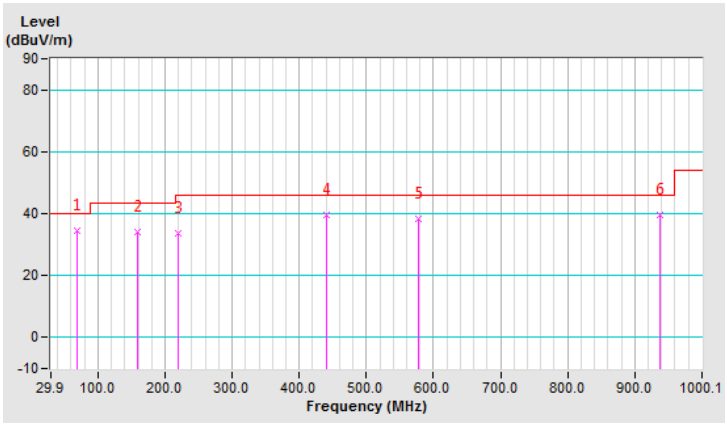

Test Mode N - AP43E (External antenna – PN: ATS-OP-245-810-4RPSP-36) + Eth7 Radio + Adapter


802.11ax (HE20)

操 作 模 式 ：	發射/接收	調 變 技 術 ：	OFDMA-MIMO
基 本 波 頻 率 ：	CH 40：5200 MHz	測 試 儀 器 ：	(QP) RB=120kHz
量 測 場 地 溫 度 ：	22℃	量 測 場 地 濕 度 ：	71%RH
測 試 日 期 ：	109 年 02 月 17 日	測 試 者 ：	張家誠

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	59.01	31.6 QP	40.0	-8.4	1.00 H	185	40.3	-8.7
2	474.25	34.0 QP	46.0	-12.0	1.00 H	177	37.0	-3.0
3	627.54	34.8 QP	46.0	-11.2	1.50 H	72	34.1	0.7
4	798.30	38.5 QP	46.0	-7.5	1.00 H	137	33.7	4.8
5	840.99	34.3 QP	46.0	-11.7	2.00 H	51	28.5	5.8
6	970.99	35.9 QP	54.0	-18.1	1.00 H	5	27.4	8.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit of frequency range 30MHz~1000MHz.
5. The emission levels were very low against the limit of frequency range 9kHz~30MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

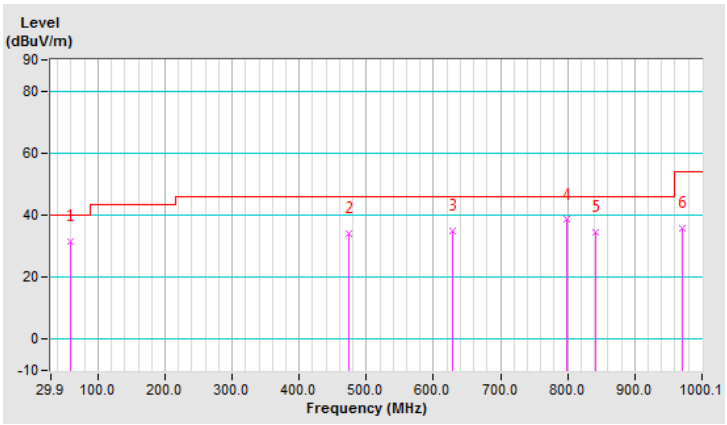


操 作 模 式 ：	發射/接收	調 變 技 術 ：	OFDMA-MIMO
基 本 波 頻 率 ：	CH 40：5200 MHz	測 試 儀 器 ：	(QP) RB=120kHz
量 測 場 地 溫 度 ：	22℃	量 測 場 地 濕 度 ：	71%RH
測 試 日 期 ：	109 年 02 月 17 日	測 試 者 ：	張家誠

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	224.91	33.1 QP	46.0	-12.9	1.50 V	85	44.5	-11.4
2	585.82	36.6 QP	46.0	-9.4	1.00 V	89	37.0	-0.4
3	651.80	36.9 QP	46.0	-9.1	1.00 V	277	35.8	1.1
4	729.41	35.0 QP	46.0	-11.0	1.00 V	282	32.0	3.0
5	880.77	33.1 QP	46.0	-12.9	1.00 V	15	26.8	6.3
6	938.01	38.3 QP	46.0	-7.7	1.50 V	152	30.4	7.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit of frequency range 30MHz~1000MHz.
5. The emission levels were very low against the limit of frequency range 9kHz~30MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

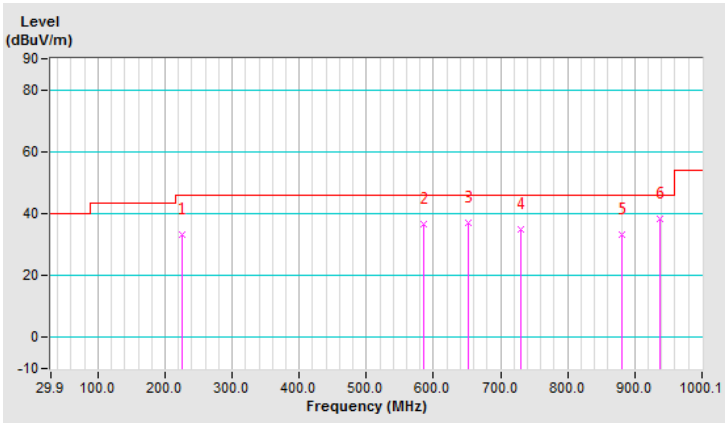

4.7 量測結果判定

依據測試數據結果，符合低功率射頻電機技術規範之要求。

4.8 配置照片

請參閱附件（測試設置照片）。