

Test Report

Applicant: Minami Acoustics Limited

Address: No.13, Maonan Road, Torch Development District, Zhongshan City,
Guangdong Province, P.R. China

Manufacturer: Minami Acoustics Limited

Address: No.13, Maonan Road, Torch Development District, Zhongshan City,
Guangdong Province, P.R. China

Product(s): StarLink Edge LE Adapter

Brand(s): N/A

Test Model(s): LE01

Series Model(s): N/A

Test Date: May 07, 2026 ~ May 17, 2026

Issued Date: May 18, 2026

Issued By: Hwa-Hsing (Dongguan) Testing Co., Ltd.

Address: No.101, Building N1, Yuyuan 2 Road, Yuyuan Industrial Park,
HuangJiang Town, Dongguan City, People's Republic of China

Standards: Article 2 Paragraph 1, item 19, MIC notice 88 Appendix 43

The above equipment has been tested by **Hwa-Hsing (Dongguan) Testing Co., Ltd.**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

Prepared by :

Nature Lee

Nature Lee

Reviewed by :



Approved by :

Scott He

Scott He

"This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. Our report includes all the tests requested by you and the results thereof based upon the information that you provided to us. The report would be invalid without specific stamp of test institute and the signatures of tester and approver."

Table of Contents

Release Control Record	4
1 Summary of Test Results	5
1.1 Test Instruments	6
1.2 Measurement Uncertainty	7
1.3 Modification Record	7
2 General Information	8
2.1 General Description of EUT	8
2.2 Description of test modes	9
2.2.1 Channel list of this EUT:	9
2.2.2 Test mode applicability and tested channel detail	10
2.2.3 Assembly	11
2.2.4 Applicable Standard	11
2.2.5 Antenna Specifications	11
2.3 Description of Support Units	12
2.3.1 Configuration of System under Test	12
3 Test types and results	13
3.1 Frequency tolerance measurement	13
3.1.1 Limits of frequency tolerance measurement	13
3.1.2 Test Setup	13
3.1.3 Deviation from Test Standard	13
3.1.4 Test Procedure	13
3.1.5 Test Results	14
3.2 Occupied bandwidth measurement (99% power bandwidth)	24
3.2.1 Limits of occupied bandwidth measurement	24
3.2.2 Test Setup	24
3.2.3 Deviation of Test Standard	24
3.2.4 Test Procedure	24
3.2.5 Test Results	25
3.3 Spreading bandwidth measurement (90% power bandwidth)	32
3.3.1 Limits of spreading bandwidth and spreading factor	32
3.3.2 Test Procedure	32
3.3.3 Deviation from Test Standard	32
3.3.4 Test Procedure	32
3.3.5 Test Results	32
3.4 Spurious emissions for transmitter measurement	39
3.4.1 Limit of Spurious emissions for transmitter measurement	39
3.4.2 Test Setup	39
3.4.3 Deviation from Test Standard	39
3.4.4 Test Procedure	39
3.4.5 Test Results	40
3.5 Antenna power measurement	53
3.5.1 Limits of antenna power	53
3.5.2 Test Setup	53
3.5.3 Deviation from Test Standard	53
3.5.4 Test Procedure	53
3.5.5 Test result Disable AFH Function	54
3.5.6 Test result of for Enable AFH Function	55
3.6 Spurious emissions for receiver	56
3.6.1 Limits of spurious emissions for receiver	56
3.6.2 Test Setup	56

3.6.3 Deviation from Test Standard	56
3.6.4 Test Procedure	56
3.6.5 Test Results	57
3.7 Dwell time of frequency hopping	64
3.7.1 Limits of dwell time	64
3.7.2 Limit of Receiver Spurious Radiation	64
3.7.3 Test setup	64
3.7.4 Deviation from test standard	64
3.7.5 Test results	64
3.8 Interference prevention function	68
3.8.1 Limits of interference prevention function	68
3.8.2 Test Procedure	68
3.8.3 Test Setup	68
3.8.4 Test results	69
4 Photographs of the test configuration	70
Appendix – Information on the Testing Laboratories	71

Release Control Record

Issue No.	Description	Date Issued
26050601-RF-JP-01	Original Release	May 18, 2026

1 Summary of Test Results

The EUT has been tested according to the following specifications:

Article 2 Paragraph 1, item 19	ARIB STD-T66	Report reference	Parameter	Test Results (Note)
General provisions				
C	3.2(4)	4.1	Frequency tolerance	C
D	3.2(7)	4.2	Occupied bandwidth	C
E	3.2(6)	4.4	Spurious emissions	C
Transmitting equipment				
F	3.2(1)	4.5	Antenna power	C
---	--	--	SAR	NA
Transmitting antenna				
--	--	2.25	Type, configuration, etc. of transmitting antenna	C
--	--	2.25	Direction pattern of transmitting antenna	C
Receiving equipment				
G	3.3(1)	4.6	Spurious emissions of receiver	C
--	--	2.25	Refer to all articles for transmitting antenna	C
Operating frequency 2400 to 2483.5MHz				
--	3.7(1)	3.23	High Frequency /modulation section cannot be opened easily	C
--	3.1(1)	2.1	Communication method	C
--	3.2(1)a	2.1	Modulation method	C
--	3.2(1)a	2.1	Spread spectrum method	C
--	3.2(2)	4.5	Antenna power	C
--	3.6(2)	4.5	Absolute gain of transmitting antenna	C
--	3.6(2)	4.5	Angular width of principal radiation (AWPR)	C
--	3.2(10)	4.2	Number of carriers within 1MHz band within OFDM	C
--	3.2(8)	4.3	Diffusion bandwidth	C
--	3.2(9)	4.3	Spreading factor	C
--	3.4.1(1)	4.7	Interference Prevention Function	C
--	3.4.1(3)	4.7	Carrier Sense Capability	C
Note: C = Conform; NC = Not Conform; NT = Not Tested; NA = Not Applicable;				

1.1 Test Instruments

Equipment	Manufacturer	Model No.	Serial No.	Next Cal.Date	Calibration Method
Spectrum	Keysight	N9020A	MY51240612	2026-07-23	C
Spectrum Analyzer	Rohde&Schwarz	FSV-40N	101783	2026-07-23	C
Power Meter 10Hz~18GHz	Tonscend	JS0806-2	188060126	2026-07-23	C
Signal generator	Keysight	E4421B	GB40051020	2026-05-18	C
Horn Antenna	Schwarzbeck	BBHA 9120 D	1959	2027-07-26*	C
Attenuator	Weinschael	54A-10	N/A	2026-07-23	C
Universal Switch Control Unit	Rohde&Schwarz	CMW500	12010002k50	2026-07-23	C
Test Software	Tonscend	JS0806-2	NA	NA	C
Humidity tester	Jingchuang	GSP-8A	CMA22B000592	2026-07-28	C

Note:

1. The test was witness in 966 Chamber and RF Oven room.
2. The calibration interval of the above test instruments is 12/24* months and the calibrations are traceable to LISAI/CHINA.
- 3: Calibration body's name: GUANGZHOU LISAI CALIBRATION AND TESTING CO., LTD.
Address: No.8 South Street Shi Ji Institute Guangzhou. Guangdong. China.

Calibration Method:

- a) Calibration conducted by the National Institute of Information and Communications Technology (NICT) (hereinafter referred to as "NICT") or a designated calibration agency under Article 102-18 paragraph (1)
- b) Correction conducted pursuant to the provisions of Article 135 or Article 144 of the Measurement Law (Law No. 51 of 1992)
- c) Calibration conducted in foreign countries, which shall be equivalent to the calibration conducted by the NICT or a designated calibration agency under Article 102-18 paragraph (1)
- d) Calibration conducted by using measuring instruments and other equipment listed in the right column of Table No. 3 attached hereto, which shall have been given any of calibration, etc. listed above from a) to c)

1.2 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT:

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

Parameter	Uncertainty
Occupied Bandwidth	206.50 Hz
Spurious emissions	$\pm 3.84\text{dB}$
Output power density	1.37dB
Out of band radiated power	2.52 dB
Frequency Tolerance	0.104 ppm
Temperature	$\pm 0.23^{\circ}\text{C}$
Humidity	$\pm 0.3\%$
DC and low frequency voltages	$\pm 0.3\%$

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

1.3 Modification Record

There were no modifications required for compliance.

2 General Information

2.1 General Description of EUT

Product Name	StarLink Edge LE Adapter
Test Model Name	LE01
Series Models Name	N/A
Power Supply Rating	DC 5V from USB
Temperature Operating Range	-15 ~ 55℃
Modulation Type	GFSK
Modulation Technology	FHSS
Transfer Rate	1 Mbps; 2Mbps
Operating Frequency	GFSK 1M: 2402MHz ~ 2480MHz GFSK 2M: 2404MHz ~ 2478MHz
Rated RF output power density	Please see Note 1
Conducted power density	Please see Note 1
EIRP power density	Please see Note 1
Antenna Type	PIFA Antenna
Antenna Gain	1.04dBi
Accessory Device	N/A
Radio FW	1.0.4
Radio HW	V0.1

Note:

1. The power table as below table:

Test condition for Modulation Technology	Rated output power density (mW/MHz)	Conducted power density (mW/MHz)	EIRP power density (dBm/MHz)
Normal mode			
GFSK 1M	0.1	0.070967	-10.449428
GFSK 2M	0.1	0.072421	-10.361367
Enable AFH function			
GFSK 1M	0.2	0.140951	-7.469311
GFSK 2M	0.2	0.125703	-7.966543

Normal mode and AFH mode differ only in the number of channels under frequency hopping. The following items were tested in AFH mode:1:Occupied bandwidth measurement (99% power bandwidth);2:Spreading bandwidth measurement (90% power bandwidth);3:Spurious emissions for transmitter measurement;4:Antenna power measurement;5:Spurious emissions for receiver.

- The above EUT information was declared by manufacturer and for more detailed features description please refers to the manufacturer's specifications or user's manual.
- Hwa-Hsing (Dongguan) Testing Co., Ltd. is not responsible for the accuracy of the information provided by the manufacturer.
- Please refer to the EUT photo document (Reference No.: 26050601) for detailed product photo.
- For the test results, the EUT had been tested with all conditions, and only the worst case was shown in the test report.

2.2 Description of test modes

2.2.1 Channel list of this EUT:

40 channels are provided to GFSK 1M:

CHANNEL	FREQ. (MHZ)	CHANNEL	FREQ. (MHZ)	CHANNEL	FREQ. (MHZ)	CHANNEL	FREQ. (MHZ)
0	2402	10	2422	20	2442	30	2462
1	2404	11	2424	21	2444	31	2464
2	2406	12	2426	22	2446	32	2466
3	2408	13	2428	23	2448	33	2468
4	2410	14	2430	24	2450	34	2470
5	2412	15	2432	25	2452	35	2472
6	2414	16	2434	26	2454	36	2474
7	2416	17	2436	27	2456	37	2476
8	2418	18	2438	28	2458	38	2478
9	2420	19	2440	29	2460	39	2480

37 channels are provided to GFSK 2M:

CHANNEL	FREQ. (MHZ)	CHANNEL	FREQ. (MHZ)	CHANNEL	FREQ. (MHZ)	CHANNEL	FREQ. (MHZ)
-	-	10	2422	20	2442	30	2462
1	2404	11	2424	21	2444	31	2464
2	2406	-	-	22	2446	32	2466
3	2408	13	2428	23	2448	33	2468
4	2410	14	2430	24	2450	34	2470
5	2412	15	2432	25	2452	35	2472
6	2414	16	2434	26	2454	36	2474
7	2416	17	2436	27	2456	37	2476
8	2418	18	2438	28	2458	38	2478
9	2420	19	2440	29	2460	-	-

Note:

1. The channels which were indicated in bold type of the above channel list were selected as presentative test channel. There fore, only the data of the test channels were recorded in this report.
2. By means of test software for GFSK provided by manufacture, the power levels during the tests were set according to the following codes:

2.2.2 Test mode applicability and tested channel detail

Test items		Test Conditions for voltage supply	Environmental Conditions
1	Frequency tolerance measurement	V _{normal}	21.2deg. C, 52%RH
2	Occupied bandwidth measurement (99% power bandwidth)		
3	Spreading bandwidth measurement (90% power bandwidth)		
4	Spurious emissions for transmitter measurement		
5	Antenna power measurement		
6	Spurious emissions for receiver		

EUT Configure mode No.	Test conditions for modulation technology
Mode A	GFSK 1Mbps
Mode B	GFSK 2Mbps
RF power setting value	
Channel	Power setting
Low	20
Middle	20
High	20

Note:

- For the test results, the EUT had been tested with all conditions, and the worst-case mode of data will record in the report.
- By means of test software which provided by manufacture, the power levels during the tests were set according to the above table.

2.2.3 Assembly

The RF circuit was located inside of the EUT.

2.2.4 Applicable Standard

When there is a fluctuation of +/-10% input voltage from external power to the test equipment. If the fluctuation of input voltage to the circuit of the radio part (excl. power) in the test equipment is confirmed below +/-1%, Measurement shall be tested with the rated voltage.

2.2.5 Antenna Specifications

Ant. Type	Highest Peak Gain (dBi) 2.4GHz ~ 2.5GHz
PIFA Antenna	1.04dBi

Note: The Antenna pattern Please refer to the attached file (Antenna report).

2.3 Description of Support Units


The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

No.	Product	Brand	Model No.	Serial No.	FCC ID
1	Notebook	DELL	Latitude E6420	00426-OEM-8992662-00006	N/A
2	Notebook	HUAWEI	NbD-WFH9	EUEPM21725002655	N/A
3	Phone 8 Plus	Apple	MQ8F2CH/A	F2LV9UBSJCM1	N/A

No.	Signal Cable Description of The Above Support Units
1	USB Cable: Unshielded, Detachable 1.2m;

2.3.1 Configuration of System under Test

Bluetooth TX/RX:

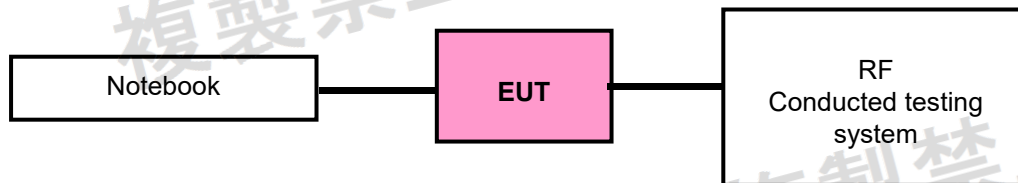


3 Test types and results

3.1 Frequency tolerance measurement

3.1.1 Limits of frequency tolerance measurement

Condition	Tolerance of frequency Limit (e.i.r.p)
Under all test conditions	Within +/- 50ppm

3.1.2 Test Setup

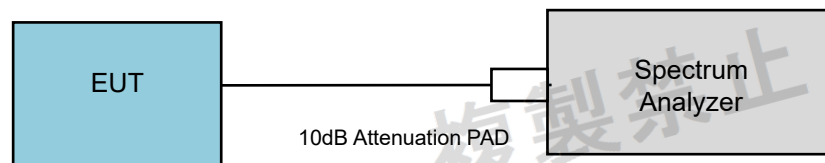

3.1.3 Deviation from Test Standard

No deviation.

3.1.4 Test Procedure

If the fluctuation of input voltage to the circuit of the radio part (excl. power) in the test equipment is confirmed below +/-1%, Measurement shall be tested with the rated voltage.

When there is a fluctuation of +/-10% input voltage from external power to the test equipment. In case the test equipment is designed to function only within the specified fluctuation range of +/-10% for the voltage source tests shall be conducted applying the rated voltage and a respective specified maximum/minimum value of fluctuation range.


Test method according to Clause 5 of Annex No.43 of MIC Notification No.88.


- The EUT was placed inside the environmental test chamber and powered by nominal DC voltage.
- Turn the EUT on and couple its output to a spectrum analyzer.
- The EUT was transmitted non-modulated frequencies.
- In case of a test mode generating specific frequency spectrum, the spectrum frequency is measured with the spectrum analyzer.


3.1.5 Test Results


Test Condition	Test Mode	Antenna	Channel	Result[ppm]	Limit[ppm]	Verdict
NTNV	GFSK-1M	Ant1	2402	-3.74688	±50	PASS
			2440	-3.27869	±50	PASS
			2480	-3.62903	±50	PASS
	GFSK-2M	Ant1	2404	-3.74376	±50	PASS
			2440	-3.68853	±50	PASS
			2478	-3.63196	±50	PASS
NTLV	GFSK-1M	Ant1	2402	-3.74688	±50	PASS
			2440	-3.68853	±50	PASS
			2480	-3.62903	±50	PASS
	GFSK-2M	Ant1	2404	-3.74376	±50	PASS
			2440	-3.68853	±50	PASS
			2478	-3.63196	±50	PASS
NTHV	GFSK-1M	Ant1	2402	-3.74688	±50	PASS
			2440	-3.68853	±50	PASS
			2480	-3.62903	±50	PASS
	GFSK-2M	Ant1	2404	-3.32779	±50	PASS
			2440	-3.68853	±50	PASS
			2478	-3.22841	±50	PASS


- The test plots listing in the below pages.

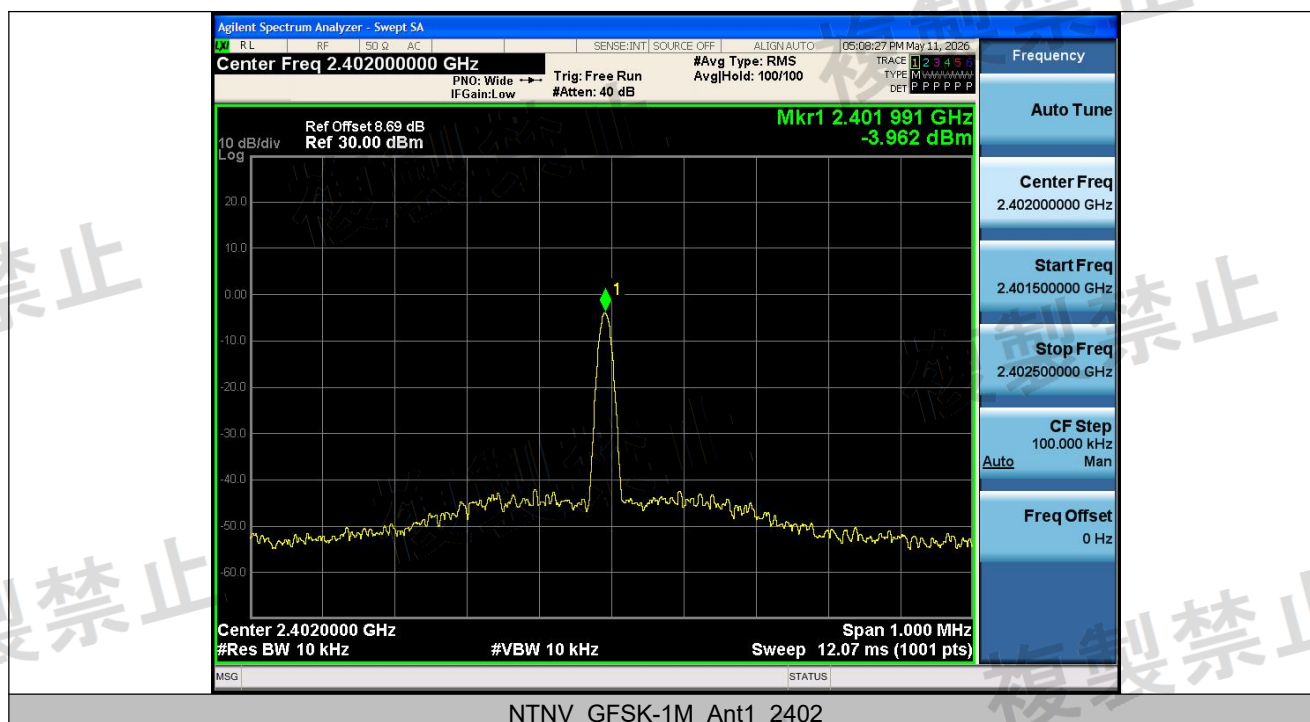


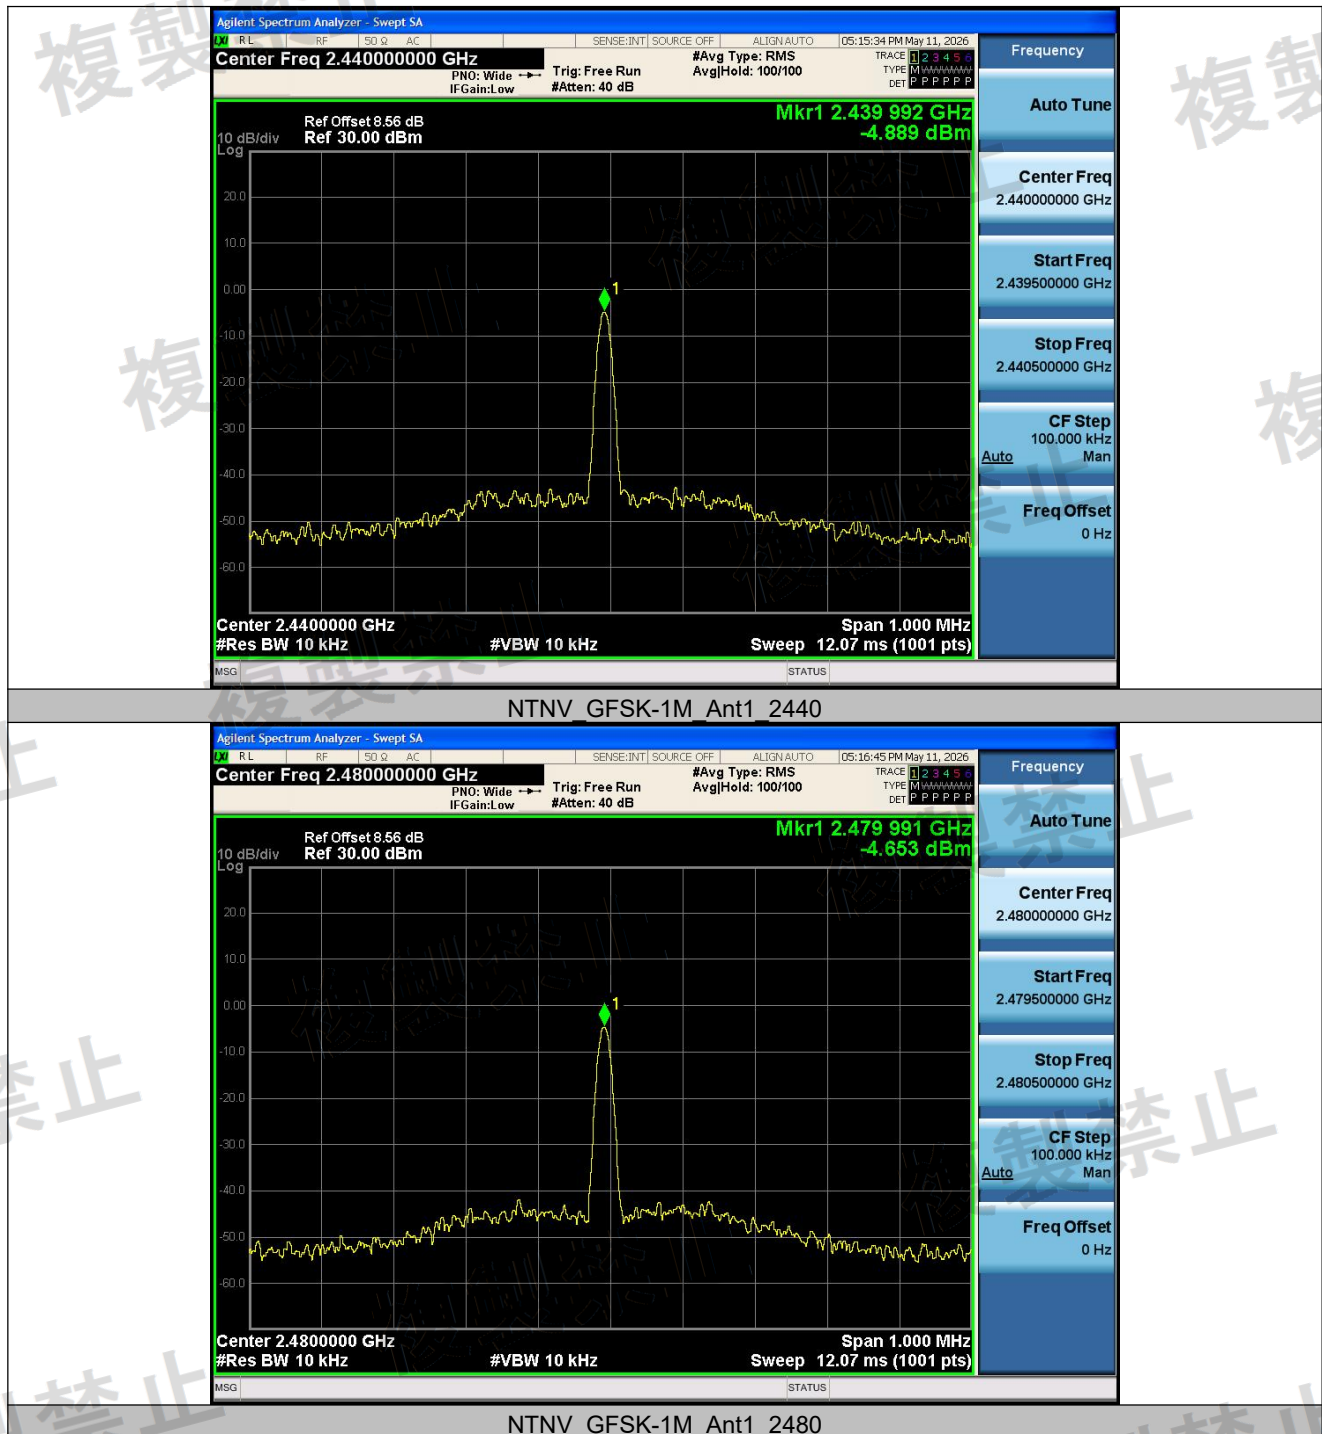


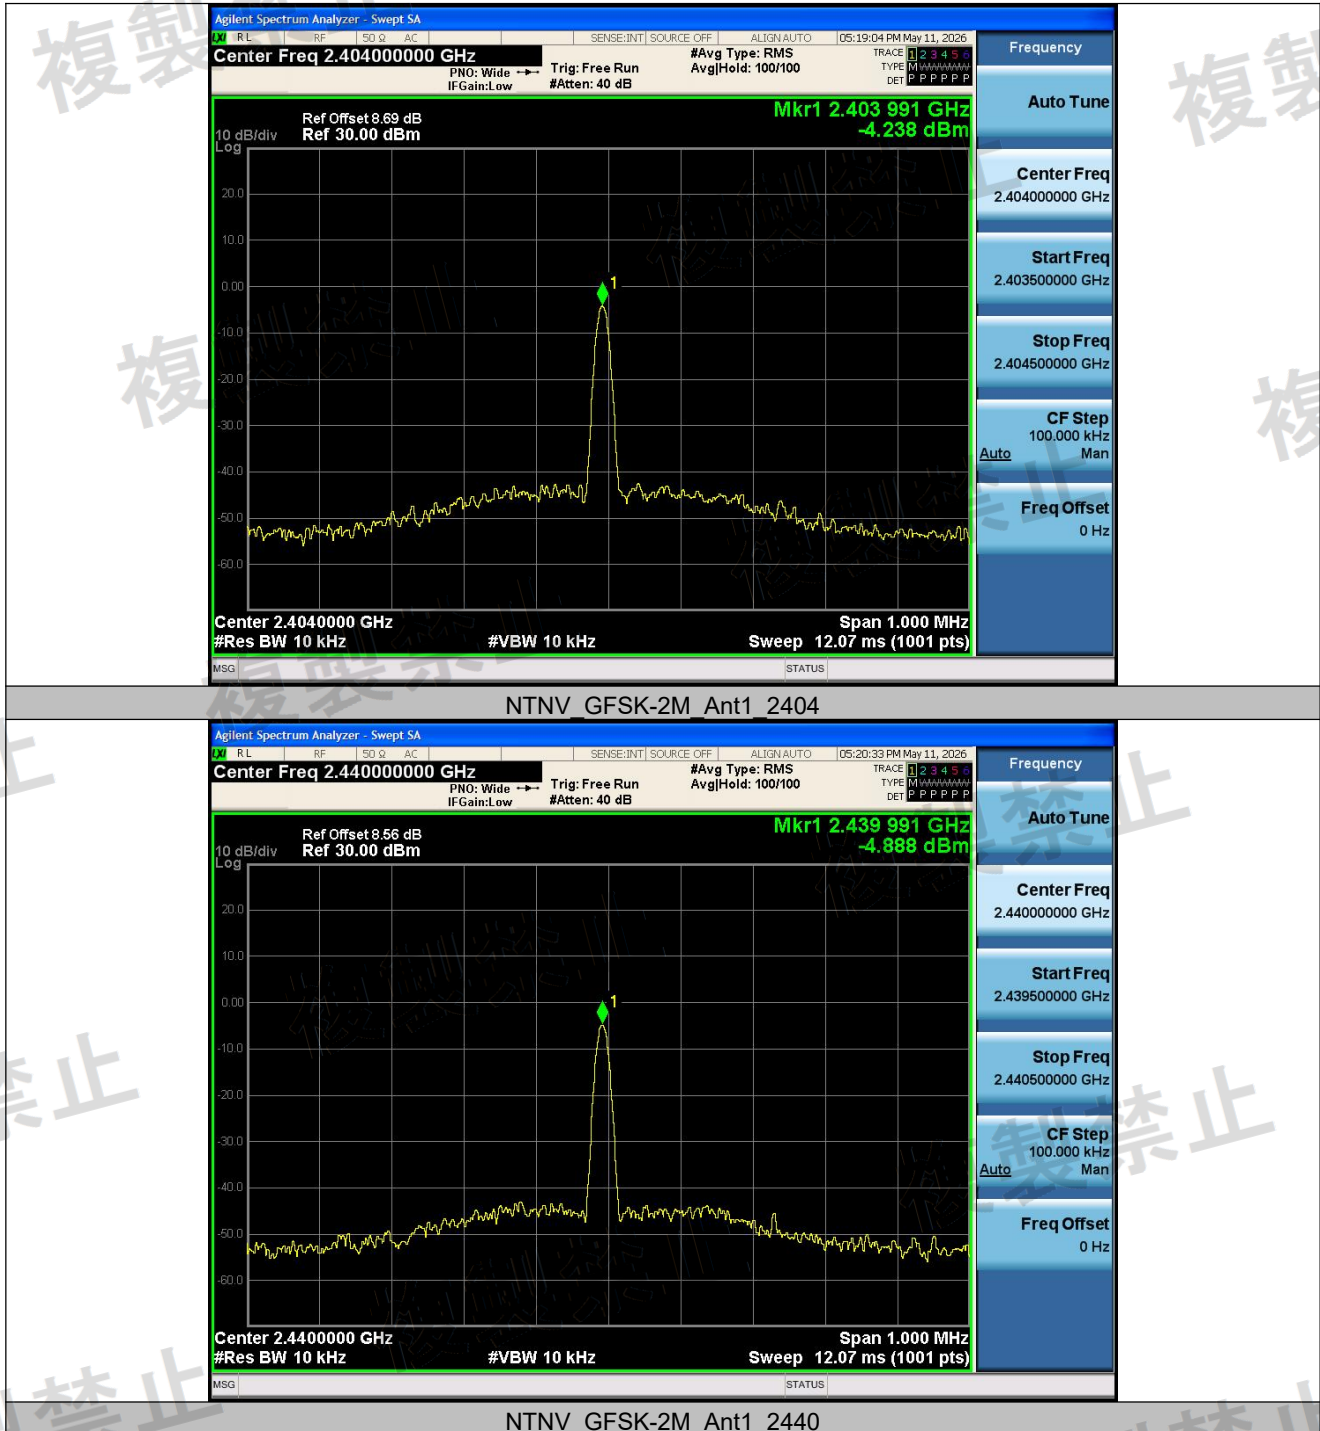


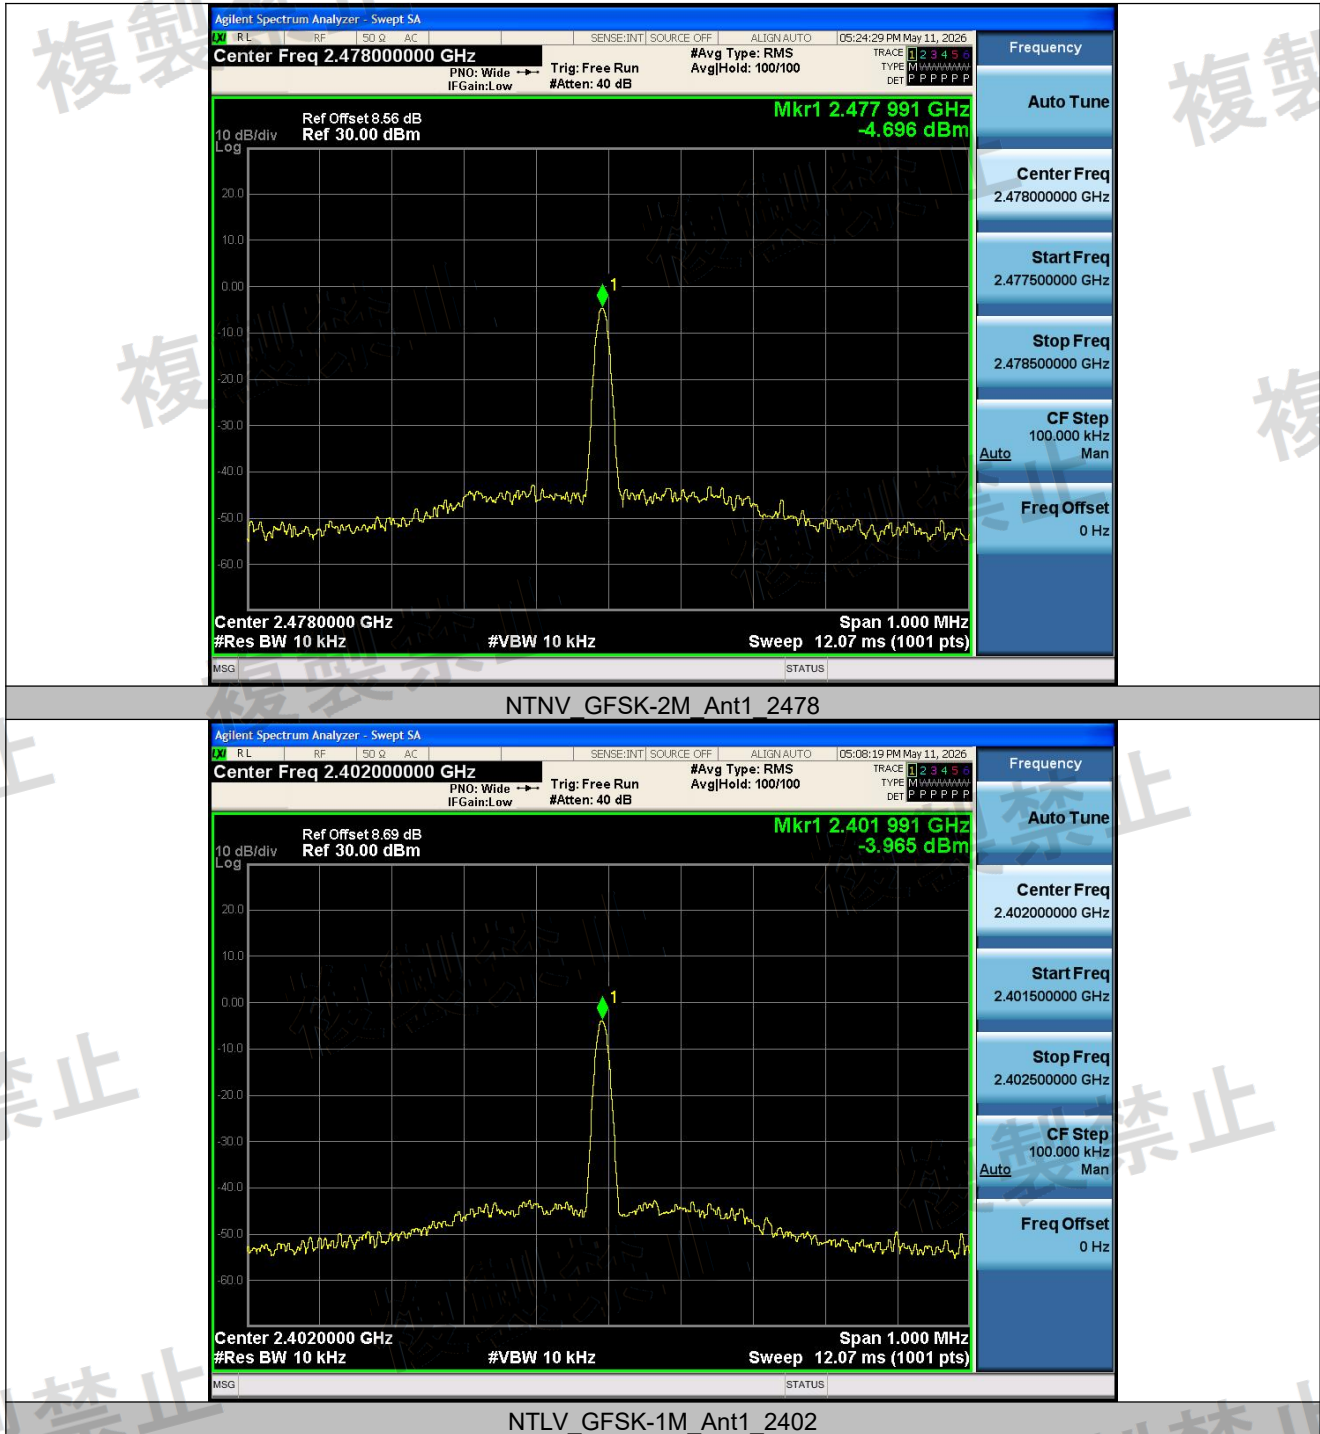


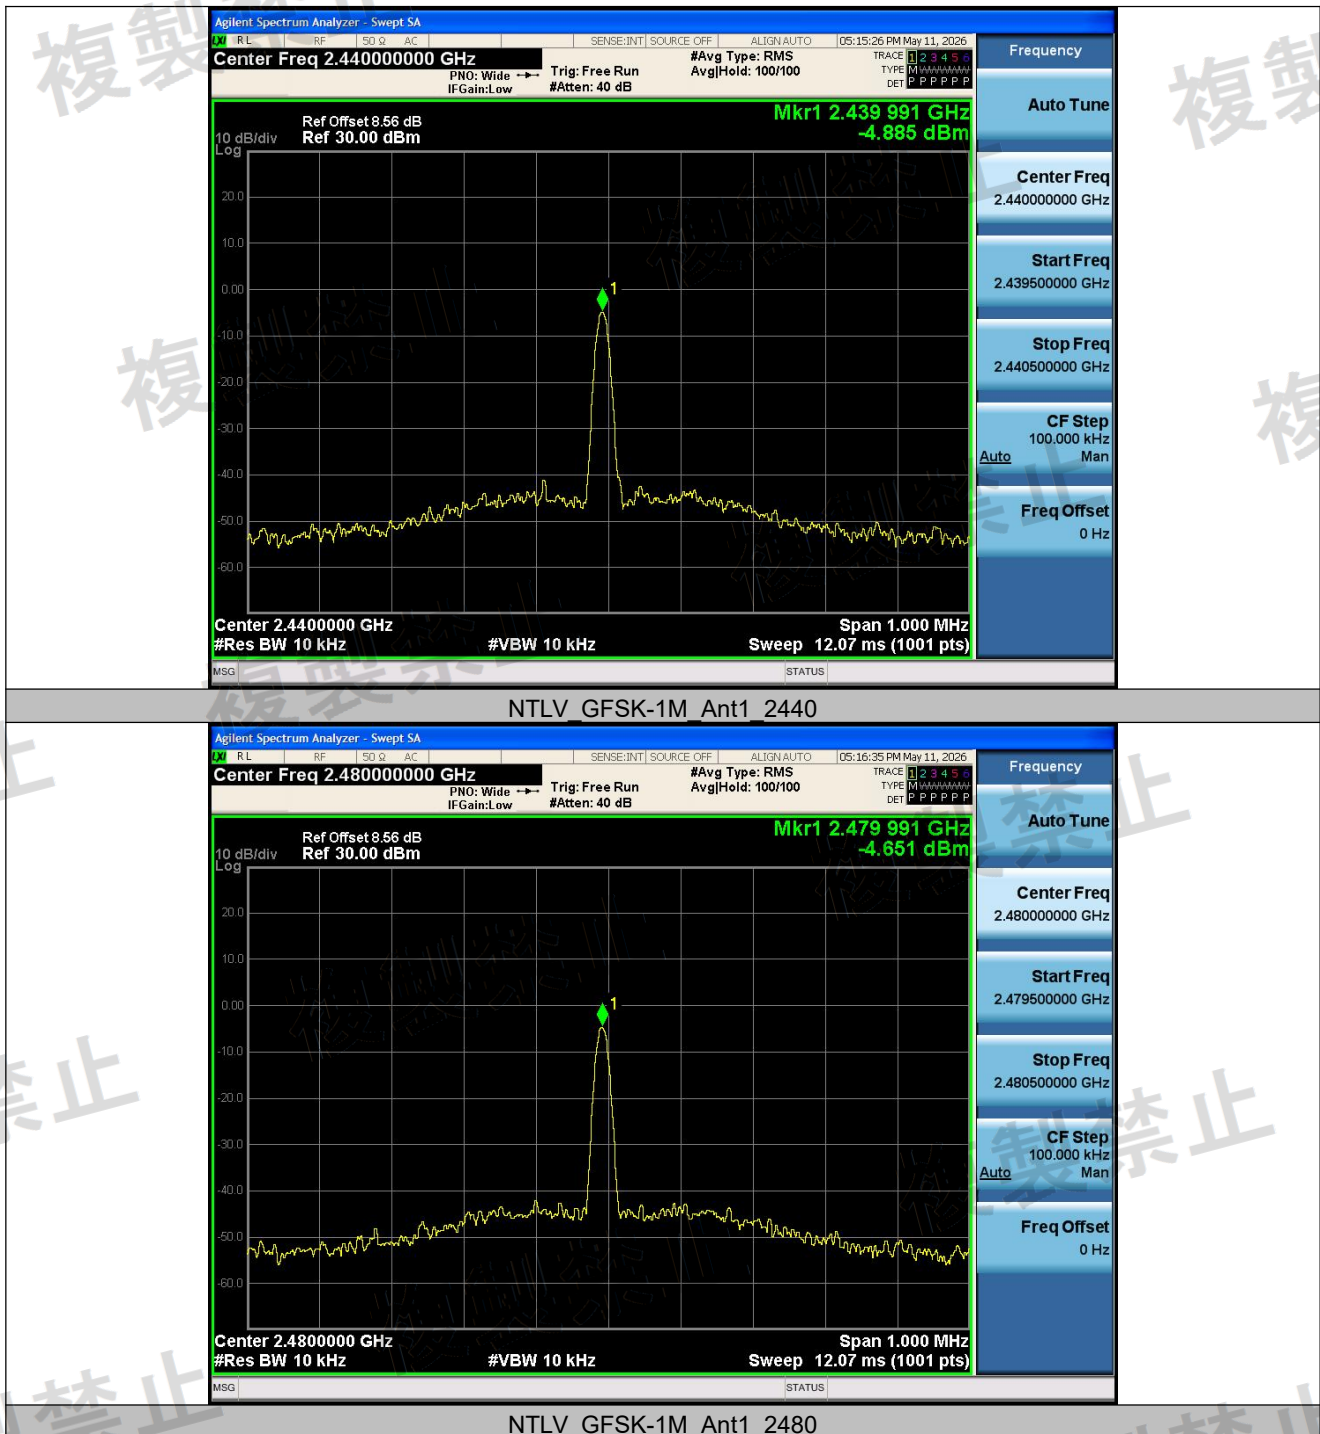


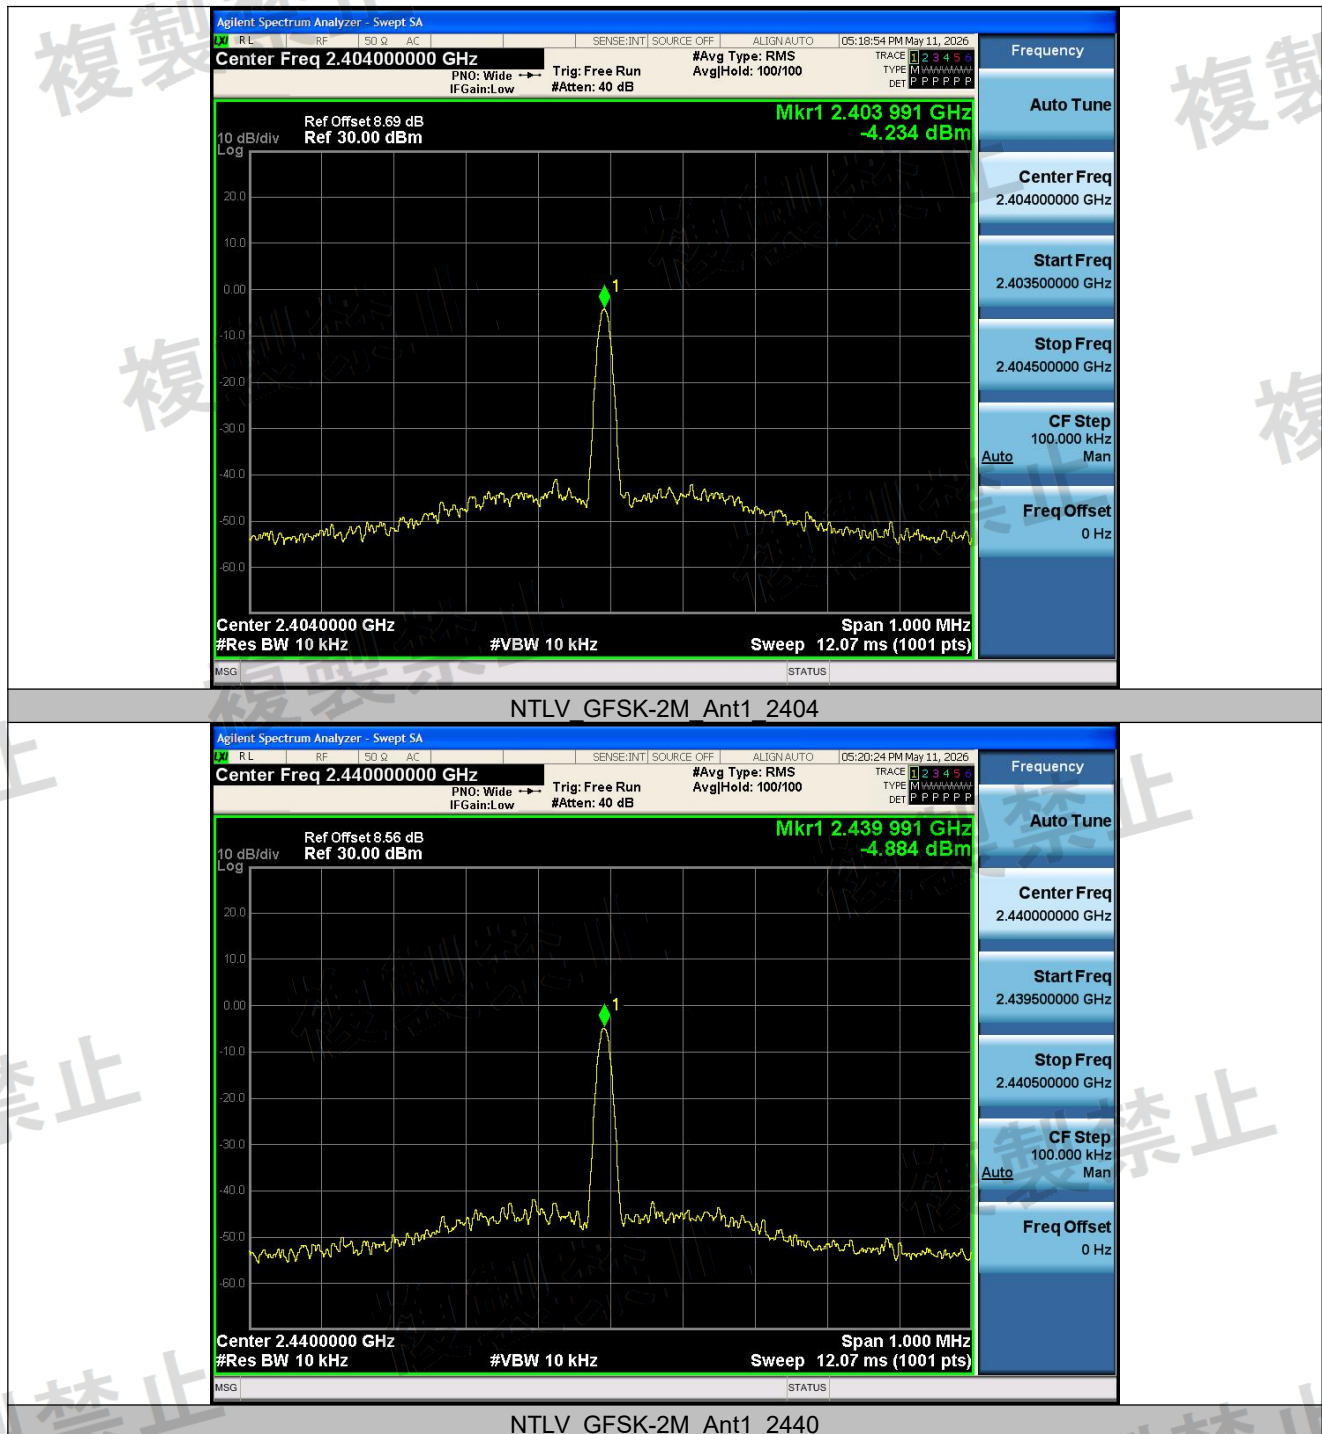

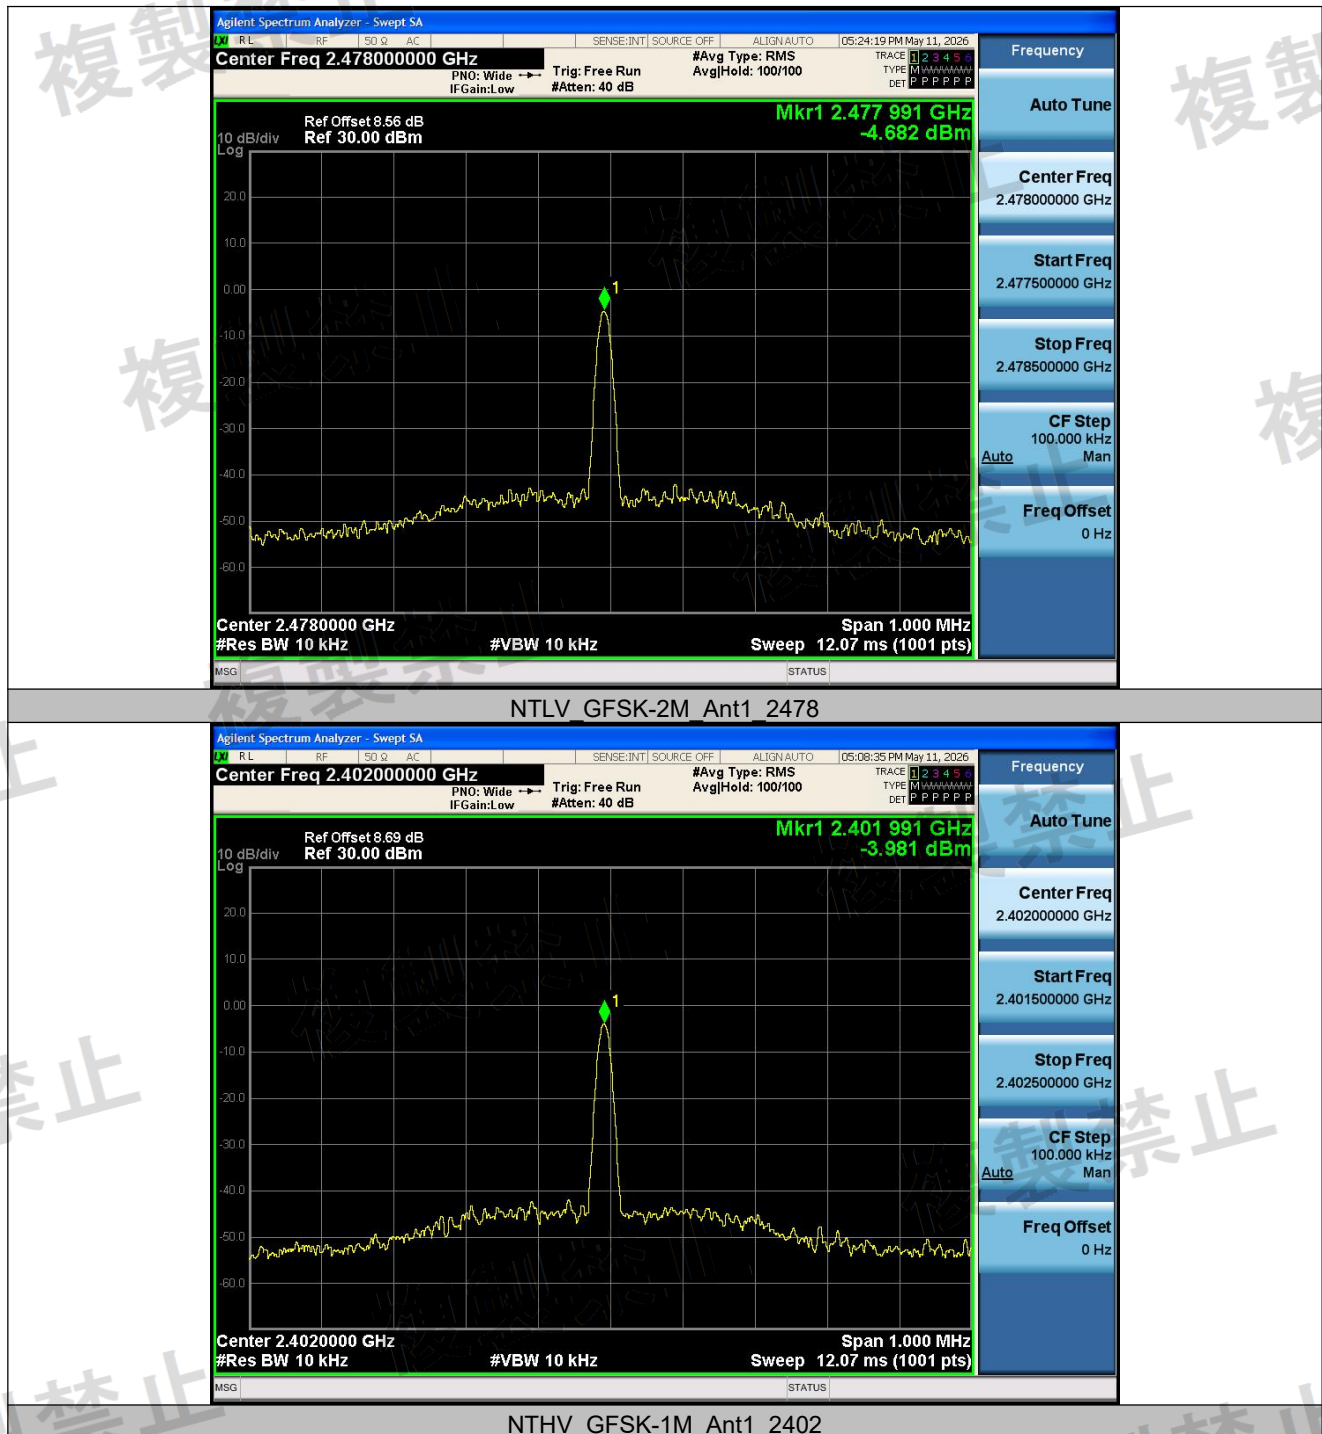

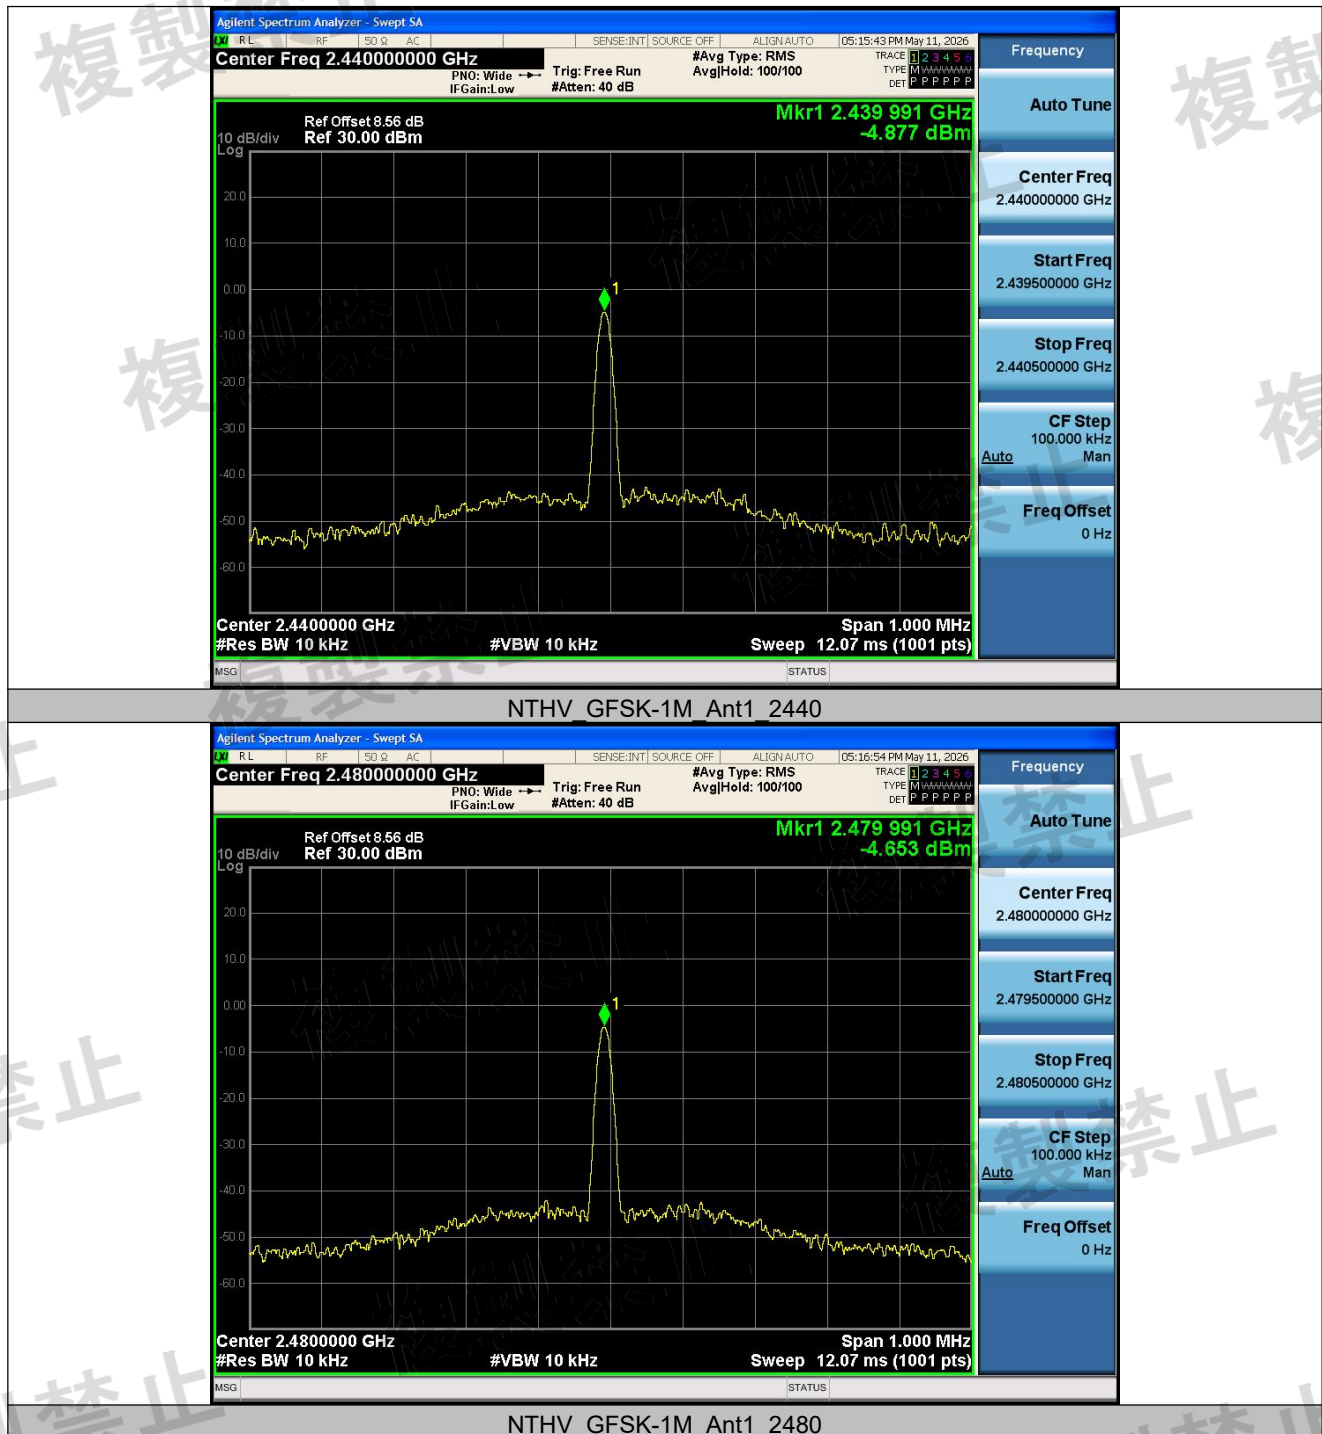

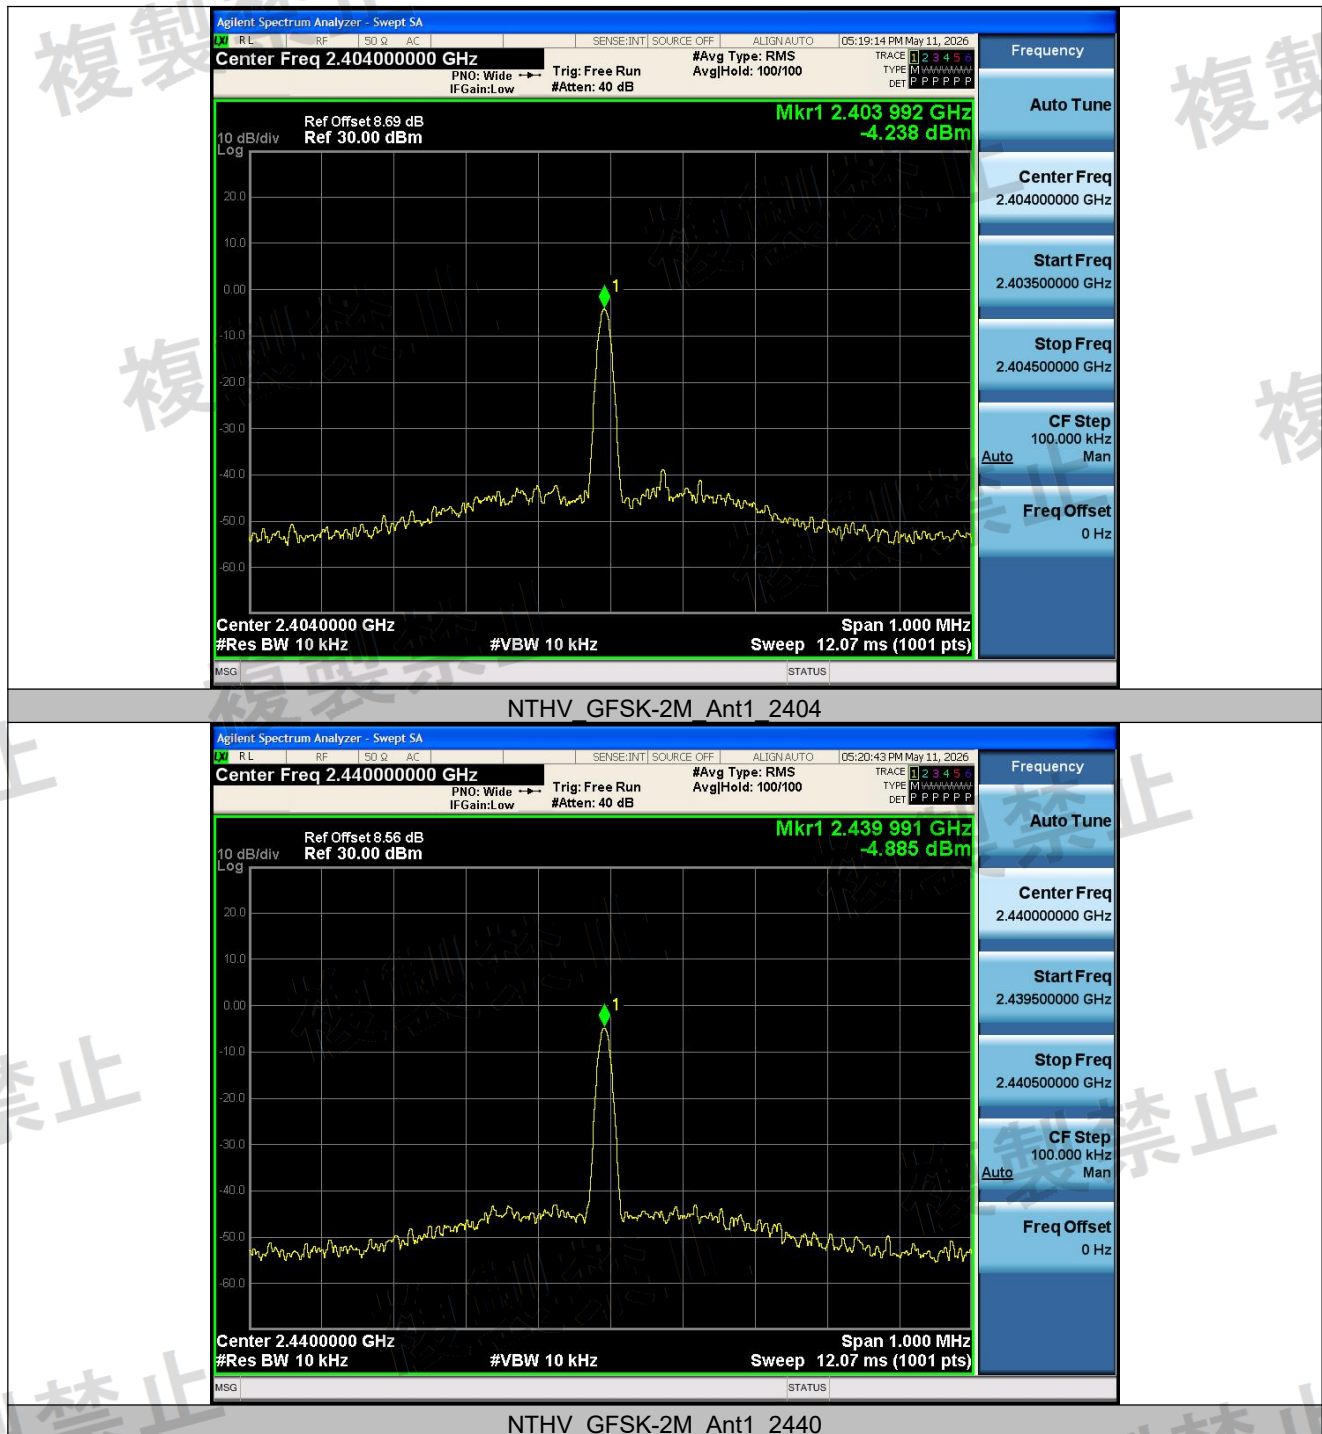

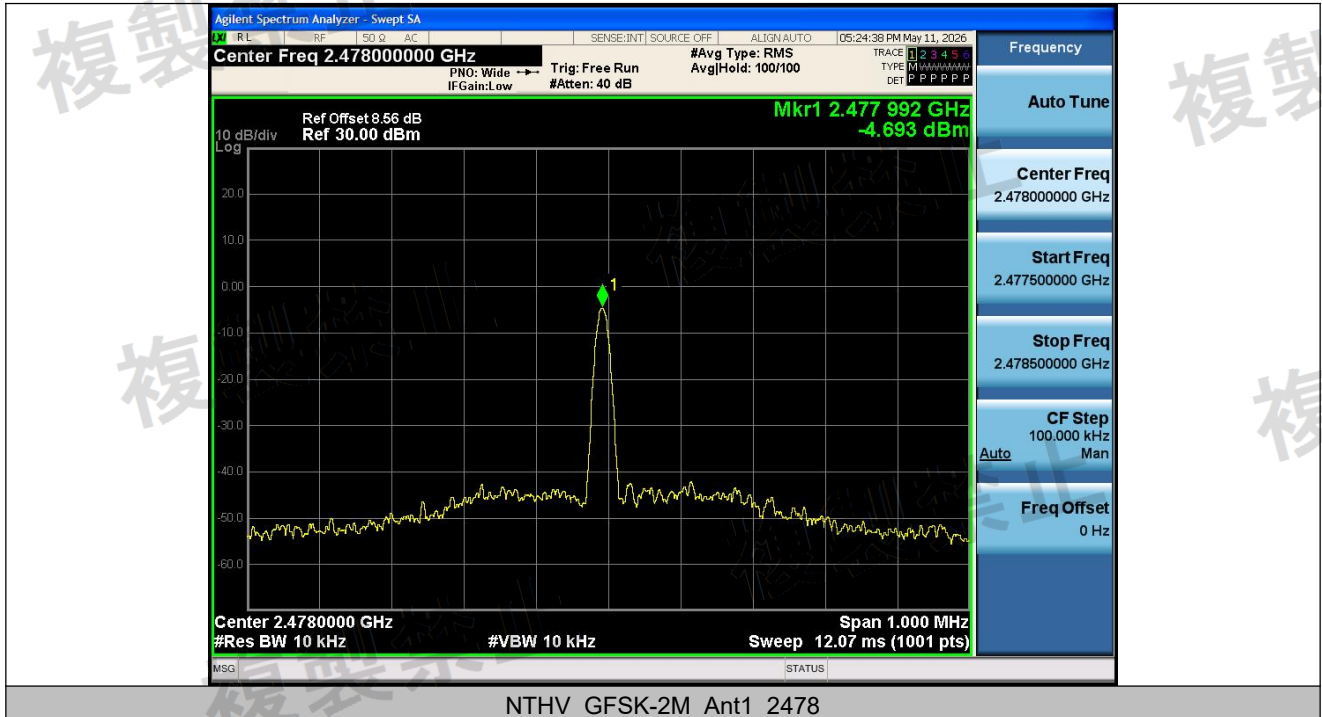


NTHV_GFSK-2M_Ant1_2478

3.2 Occupied bandwidth measurement (99% power bandwidth)

3.2.1 Limits of occupied bandwidth measurement

Condition	Occupied bandwidth Limit
Under all test conditions	≤83.5MHz

3.2.2 Test Setup

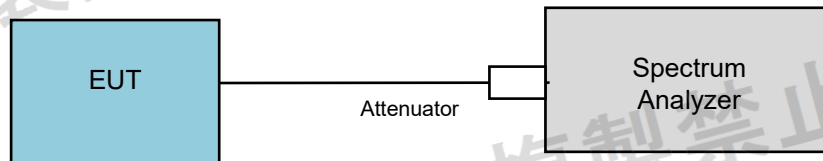

3.2.3 Deviation of Test Standard

No deviation.

3.2.4 Test Procedure


Test method according to Clause 5 of Annex No.43 of MIC Notification No.88.


The EUT was placed inside the environmental test chamber and powered by nominal DC voltage. The bandwidth of the fundamental frequency was measured by spectrum analyzer. The width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5 % of the total mean power of a given emission.


3.2.5 Test Results


Test Condition	Test Mode	Antenna	Channel	Result [MHz]	Limit [MHz]	Verdict
NTNV	GFSK-1M	Ant1	Hop_Num_20	38.804	≤83.5	PASS
			Hop_Num_40	78.696	≤83.5	PASS
	GFSK-2M	Ant1	Hop_Num_21	42.789	≤83.5	PASS
			Hop_Num_37	75.000	≤83.5	PASS
NTLV	GFSK-1M	Ant1	Hop_Num_20	38.801	≤83.5	PASS
			Hop_Num_40	78.644	≤83.5	PASS
	GFSK-2M	Ant1	Hop_Num_21	42.788	≤83.5	PASS
			Hop_Num_37	74.802	≤83.5	PASS
NTHV	GFSK-1M	Ant1	Hop_Num_20	38.806	≤83.5	PASS
			Hop_Num_40	78.573	≤83.5	PASS
	GFSK-2M	Ant1	Hop_Num_21	42.796	≤83.5	PASS
			Hop_Num_37	75.016	≤83.5	PASS


Note: For the test plots please refer to the below.

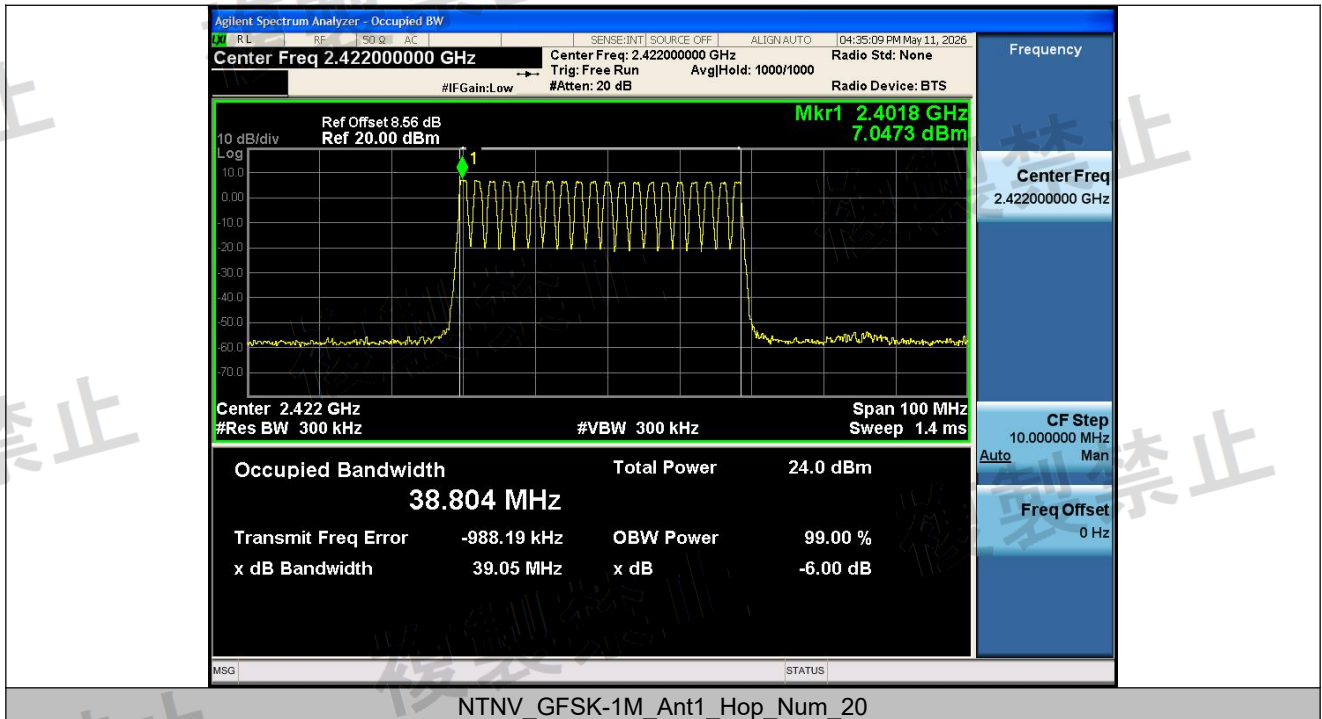


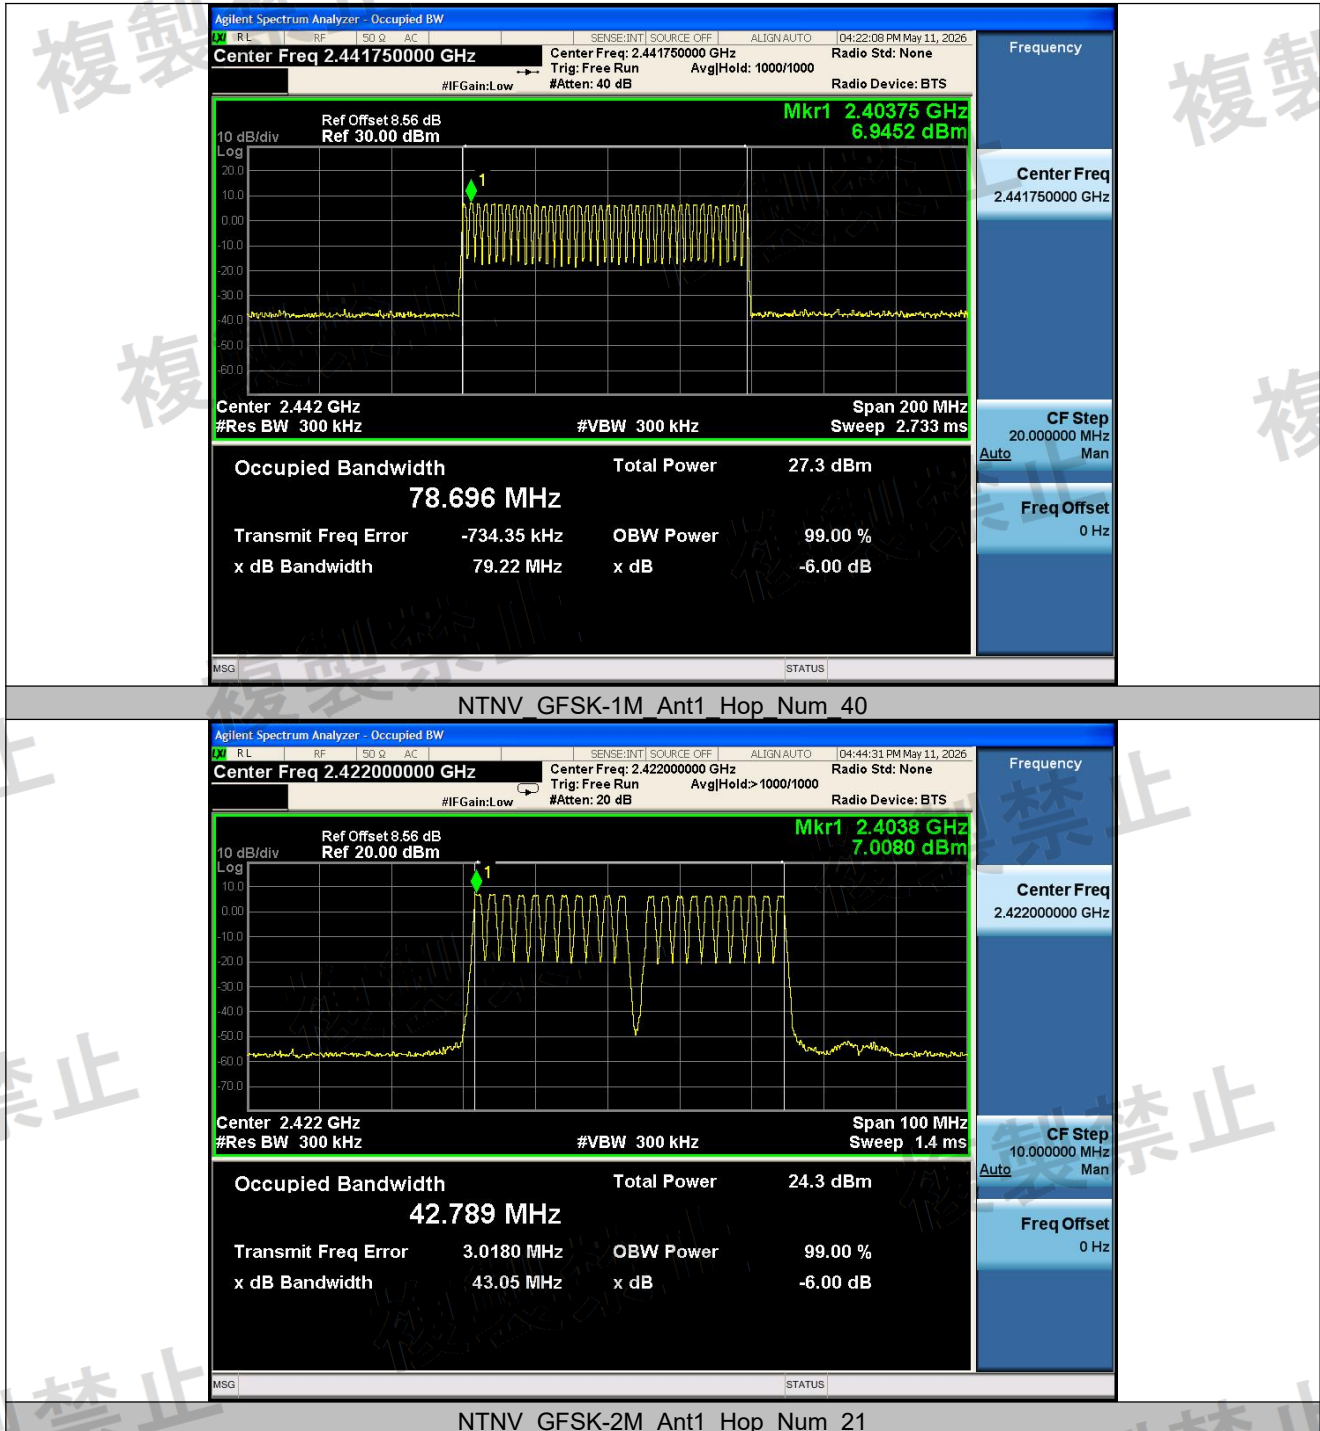


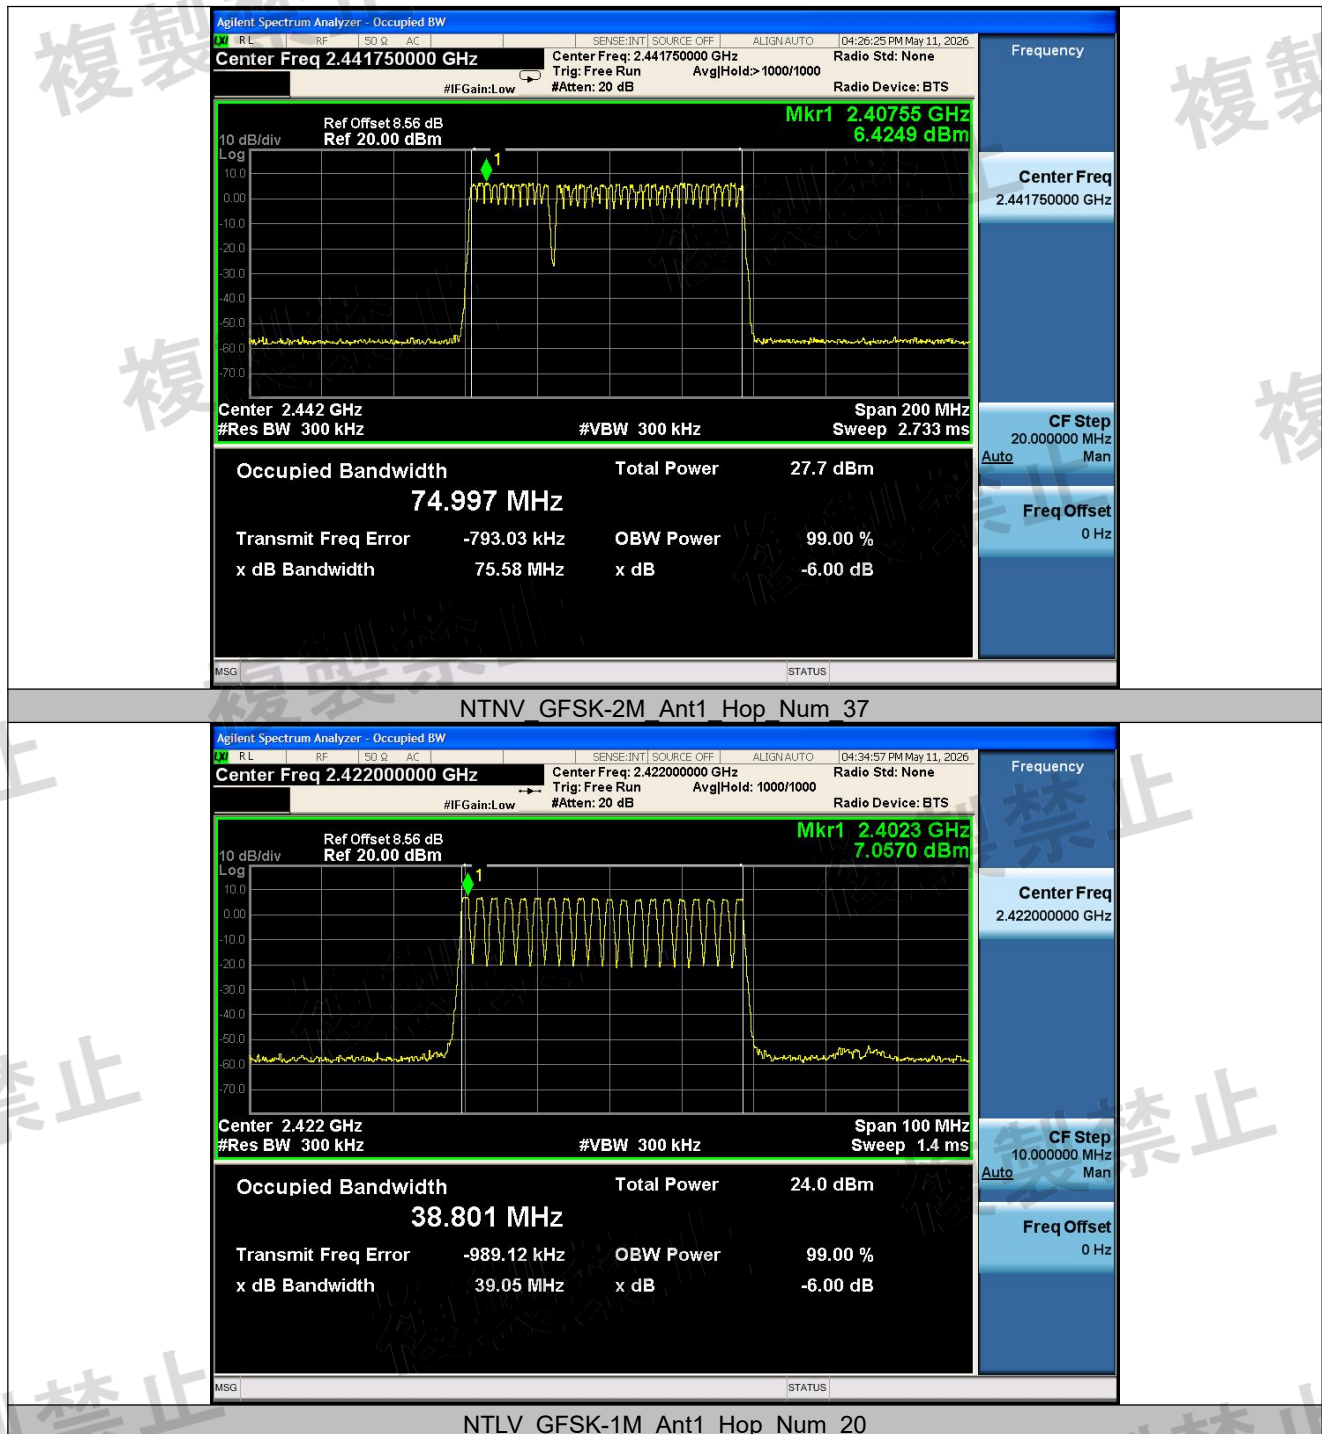

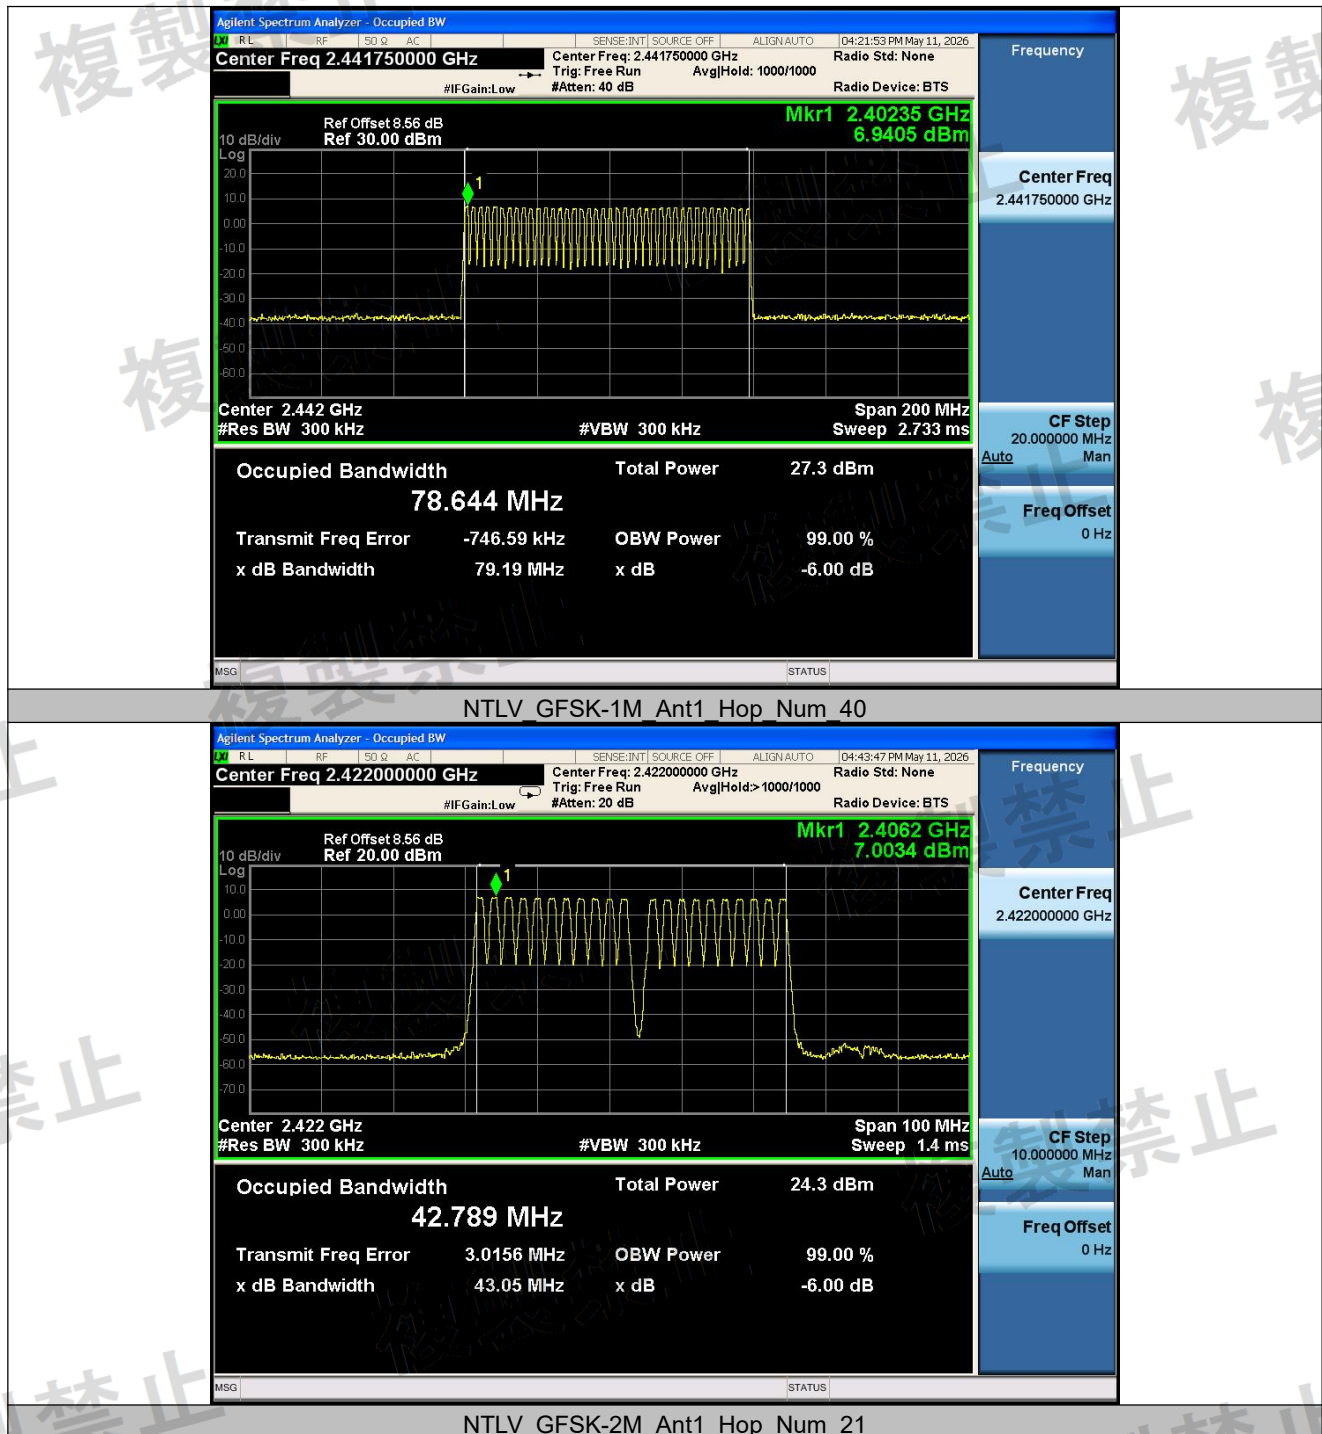

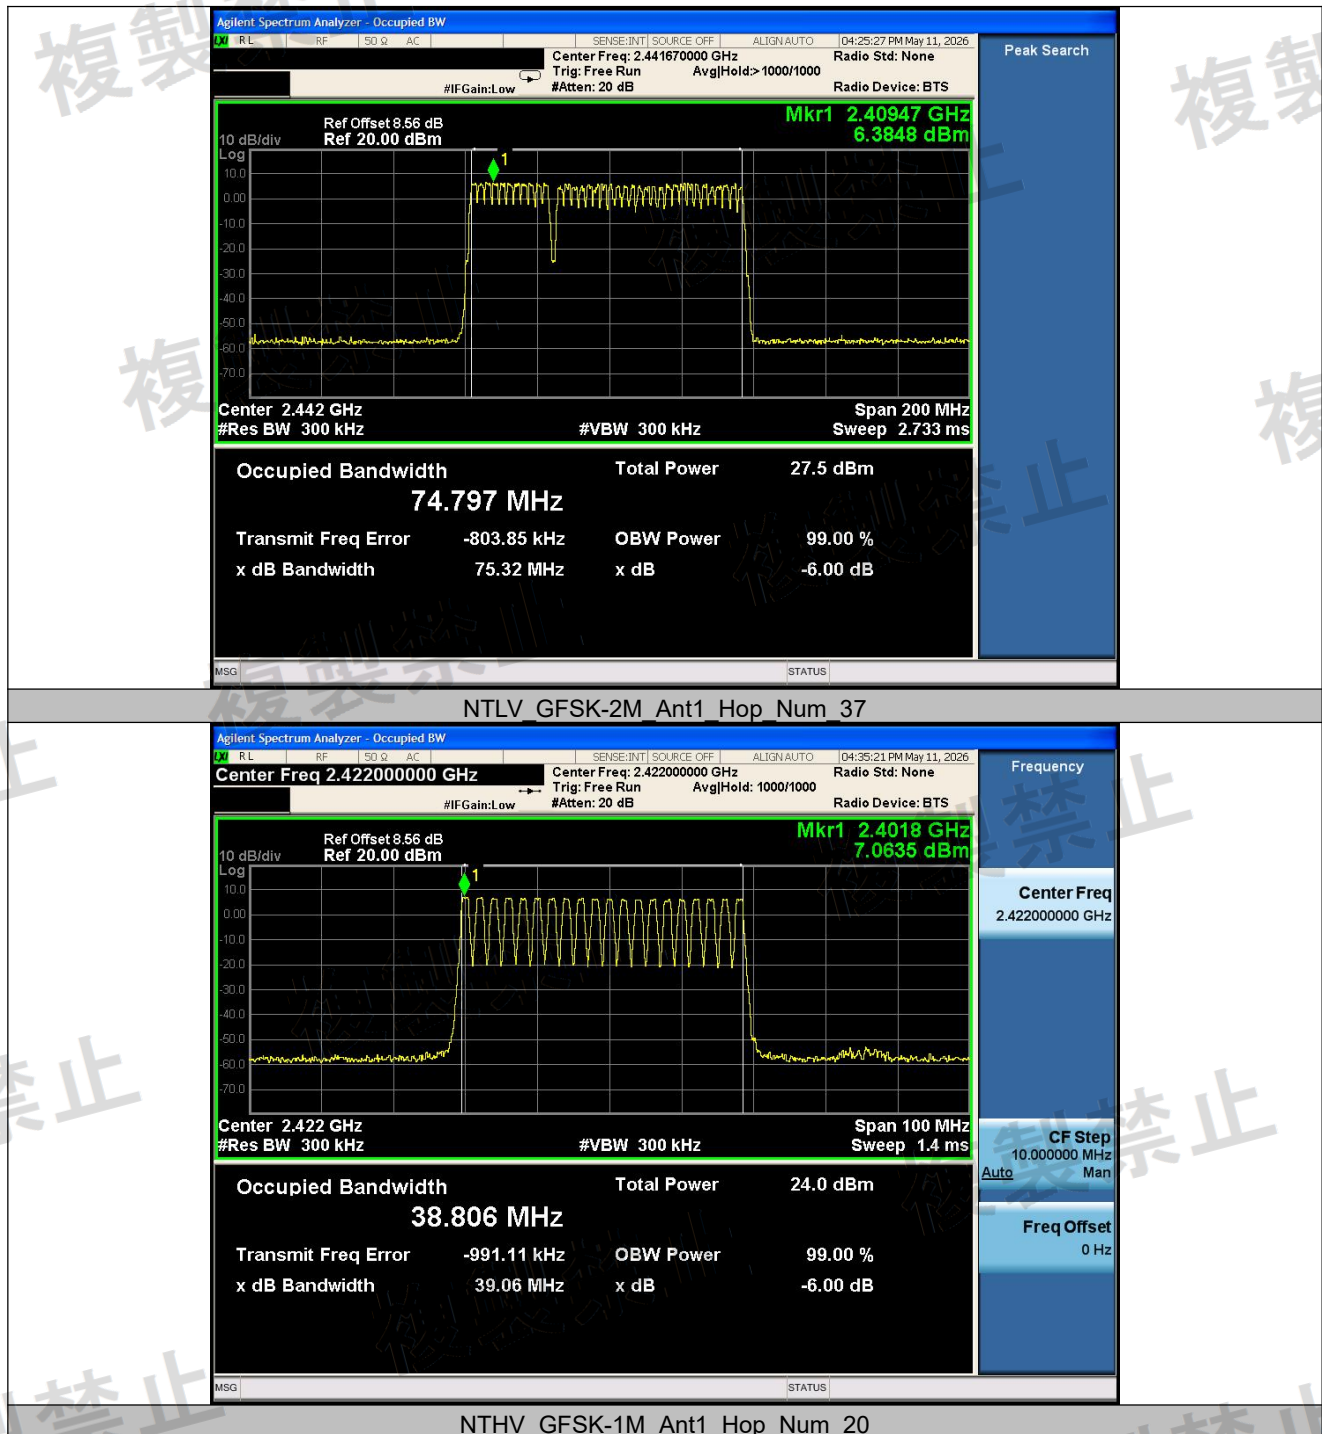

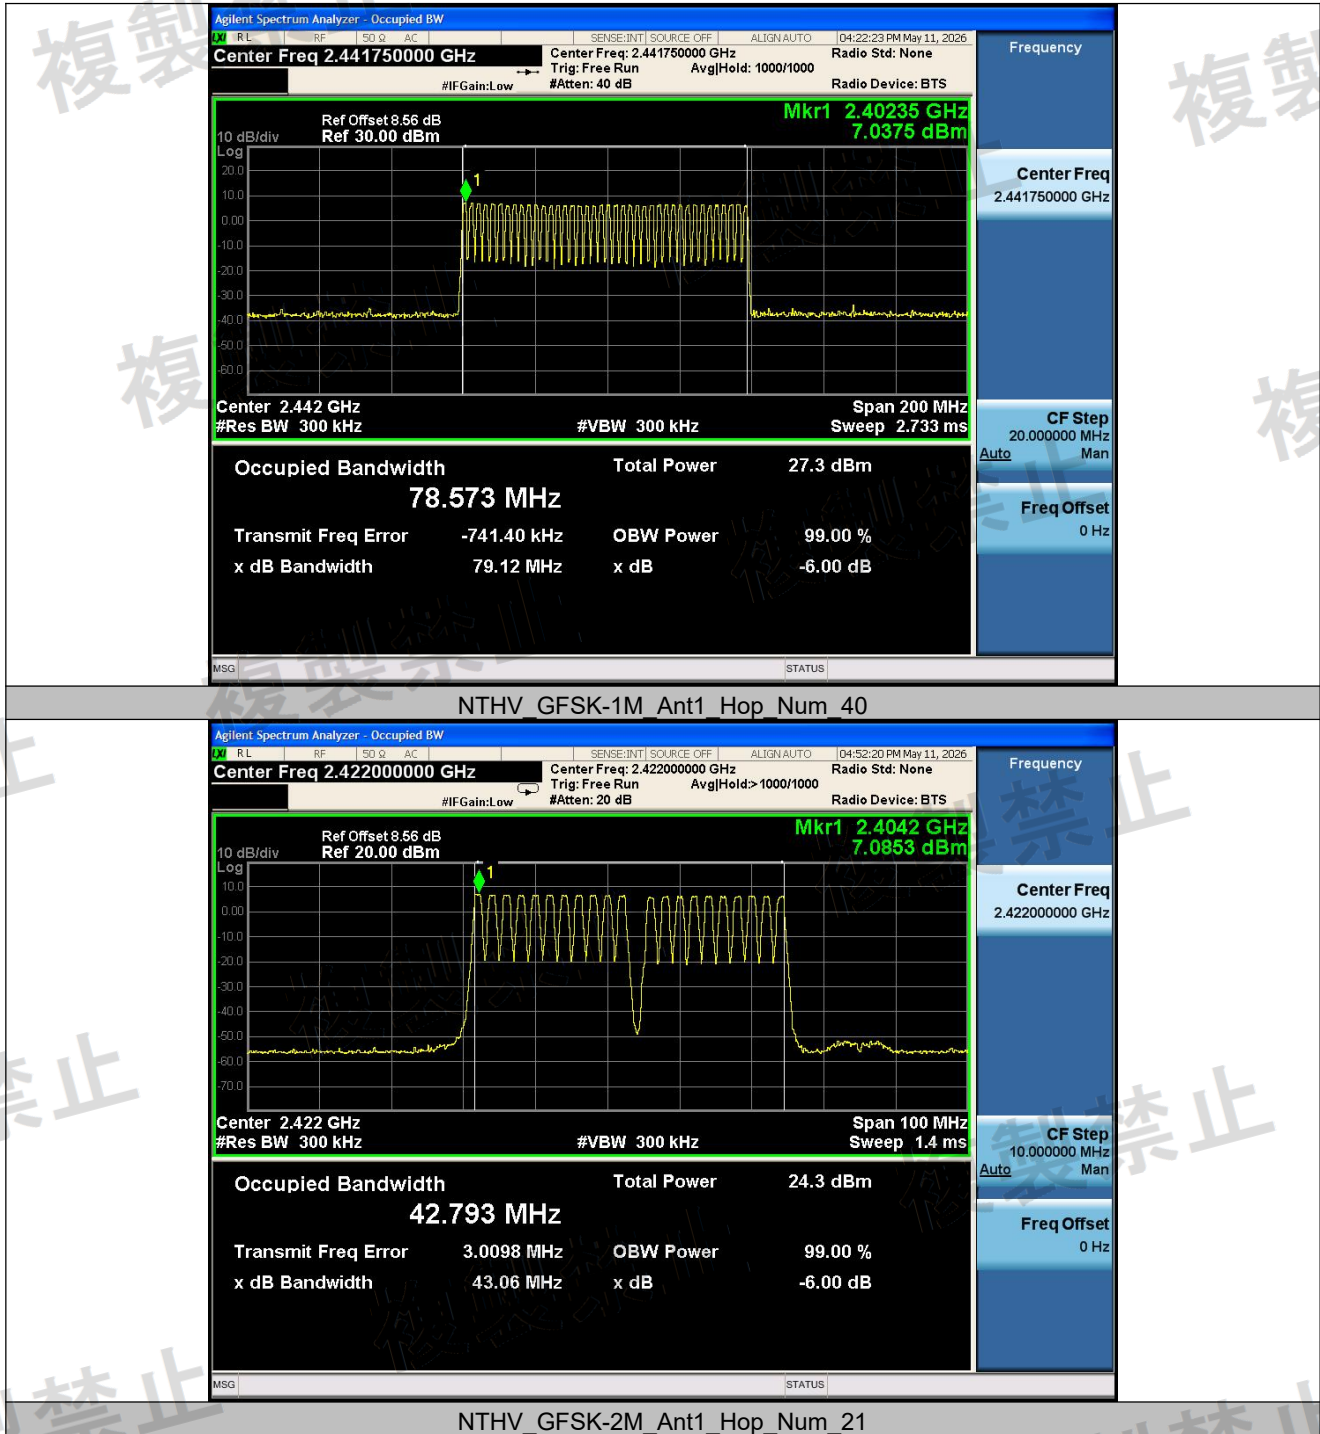

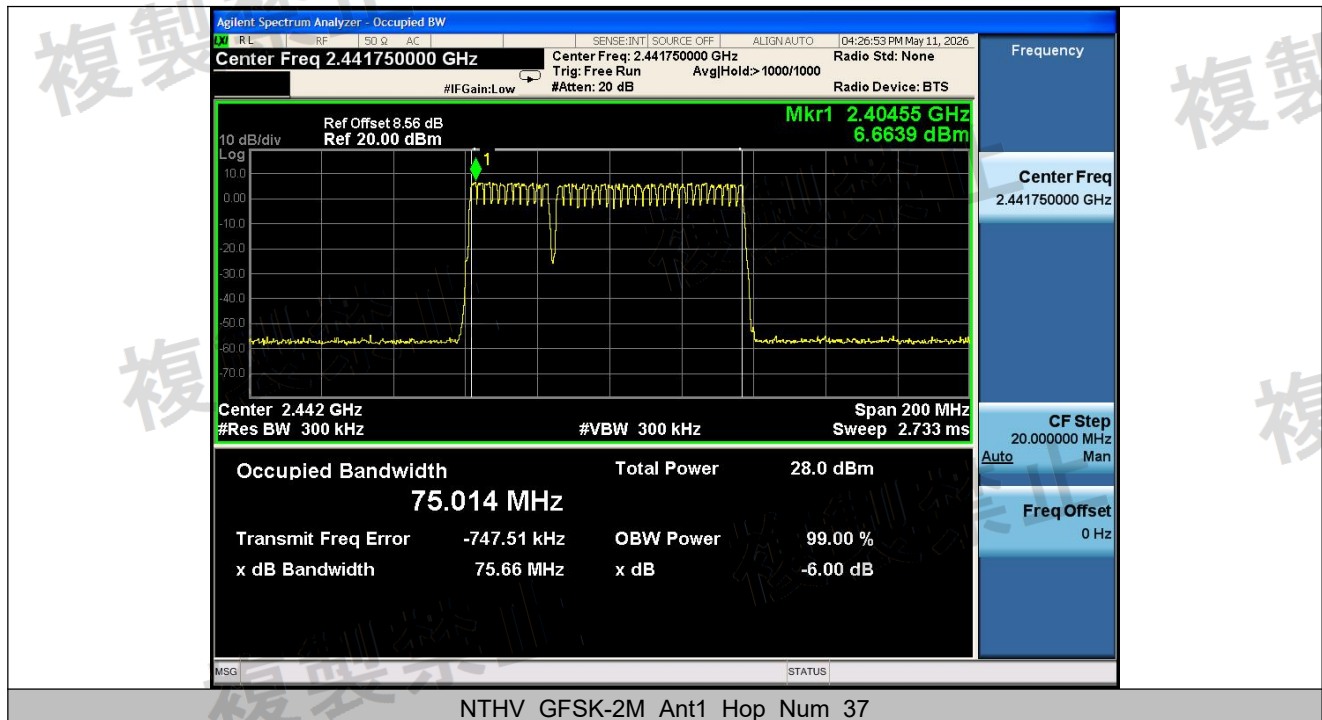


3.3 Spreading bandwidth measurement (90% power bandwidth)

3.3.1 Limits of spreading bandwidth and spreading factor

Condition	Limit
☒ Adaptive frequency hopping systems	The minimum spreading bandwidth shall be 500 kHz.

3.3.2 Test Procedure

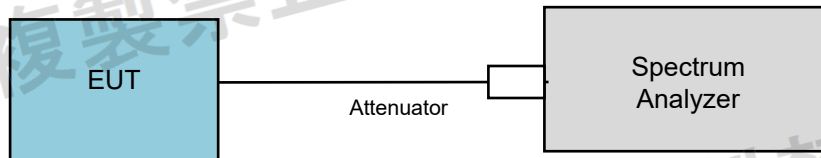

3.3.3 Deviation from Test Standard

No deviation.

3.3.4 Test Procedure


Test method according to Clause 5 of Annex No.43 of MIC Notification No.88.


The EUT was placed inside the environmental test chamber and powered by nominal DC voltage. The bandwidth of the fundamental frequency was measured by spectrum analyzer. The width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 5 %of the total mean power of a given emission.


3.3.5 Test Results


Test Condition	Test Mode	Antenna	Channel	Result [MHz]	Limit [MHz]	Verdict
NTNV	GFSK-1M	Ant1	Hop_Num_20	36.132	≥0.5	PASS
			Hop_Num_40	72.351	≥0.5	PASS
	GFSK-2M	Ant1	Hop_Num_21	39.972	≥0.5	PASS
			Hop_Num_37	69.641	≥0.5	PASS
NTLV	GFSK-1M	Ant1	Hop_Num_20	36.202	≥0.5	PASS
			Hop_Num_40	73.317	≥0.5	PASS
	GFSK-2M	Ant1	Hop_Num_21	40.031	≥0.5	PASS
			Hop_Num_37	69.348	≥0.5	PASS
NTHV	GFSK-1M	Ant1	Hop_Num_20	36.080	≥0.5	PASS
			Hop_Num_40	72.987	≥0.5	PASS
	GFSK-2M	Ant1	Hop_Num_21	40.158	≥0.5	PASS
			Hop_Num_37	69.384	≥0.5	PASS


Note: For the test plots please refer to the below.

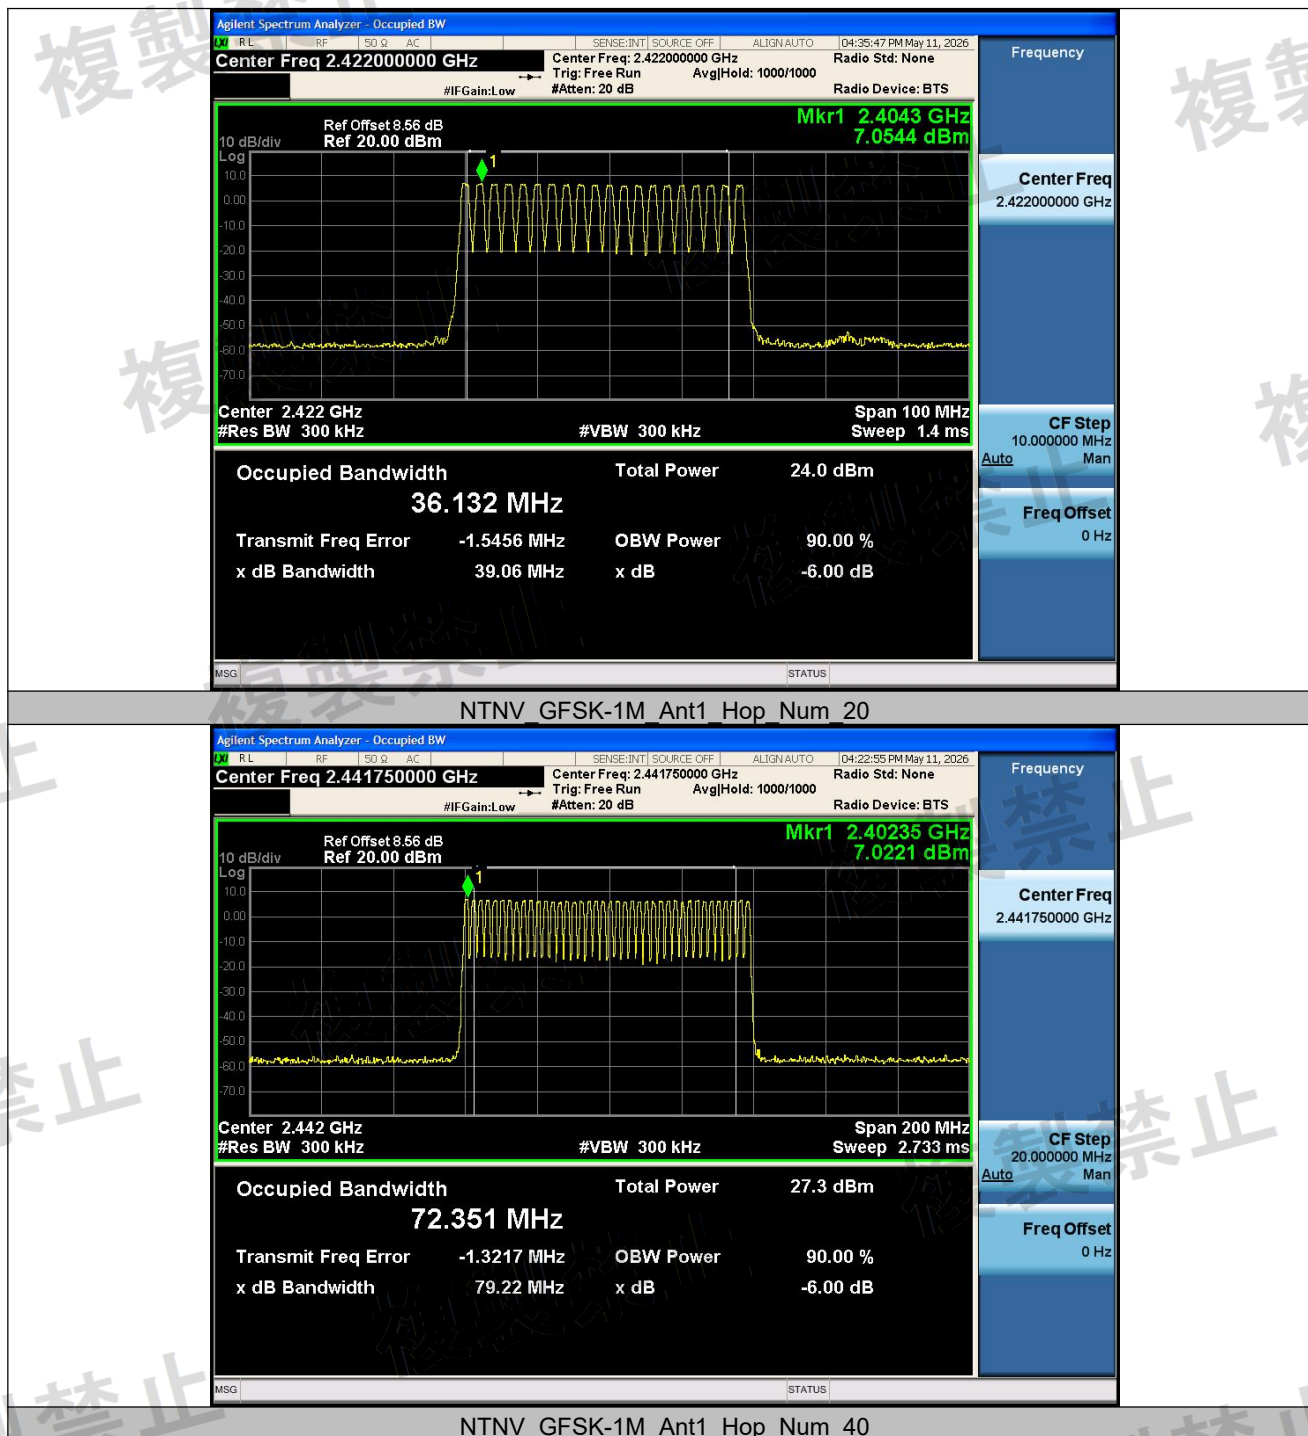


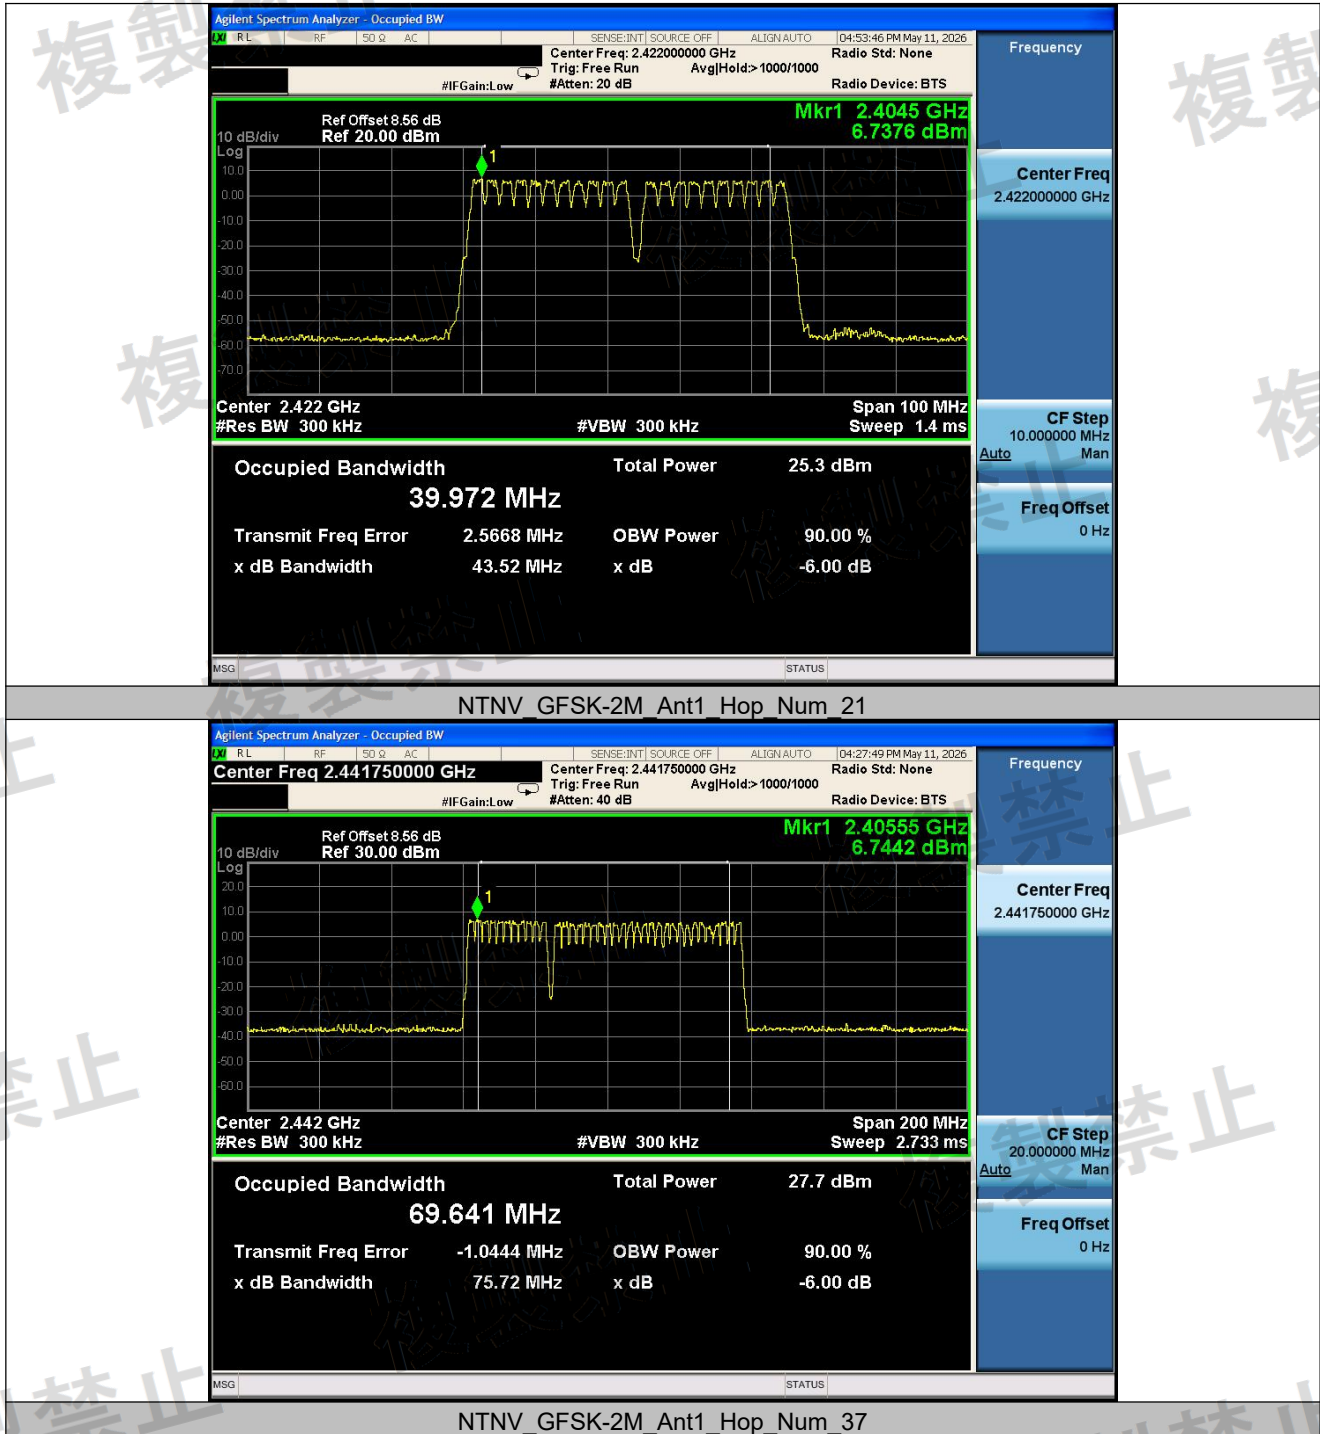

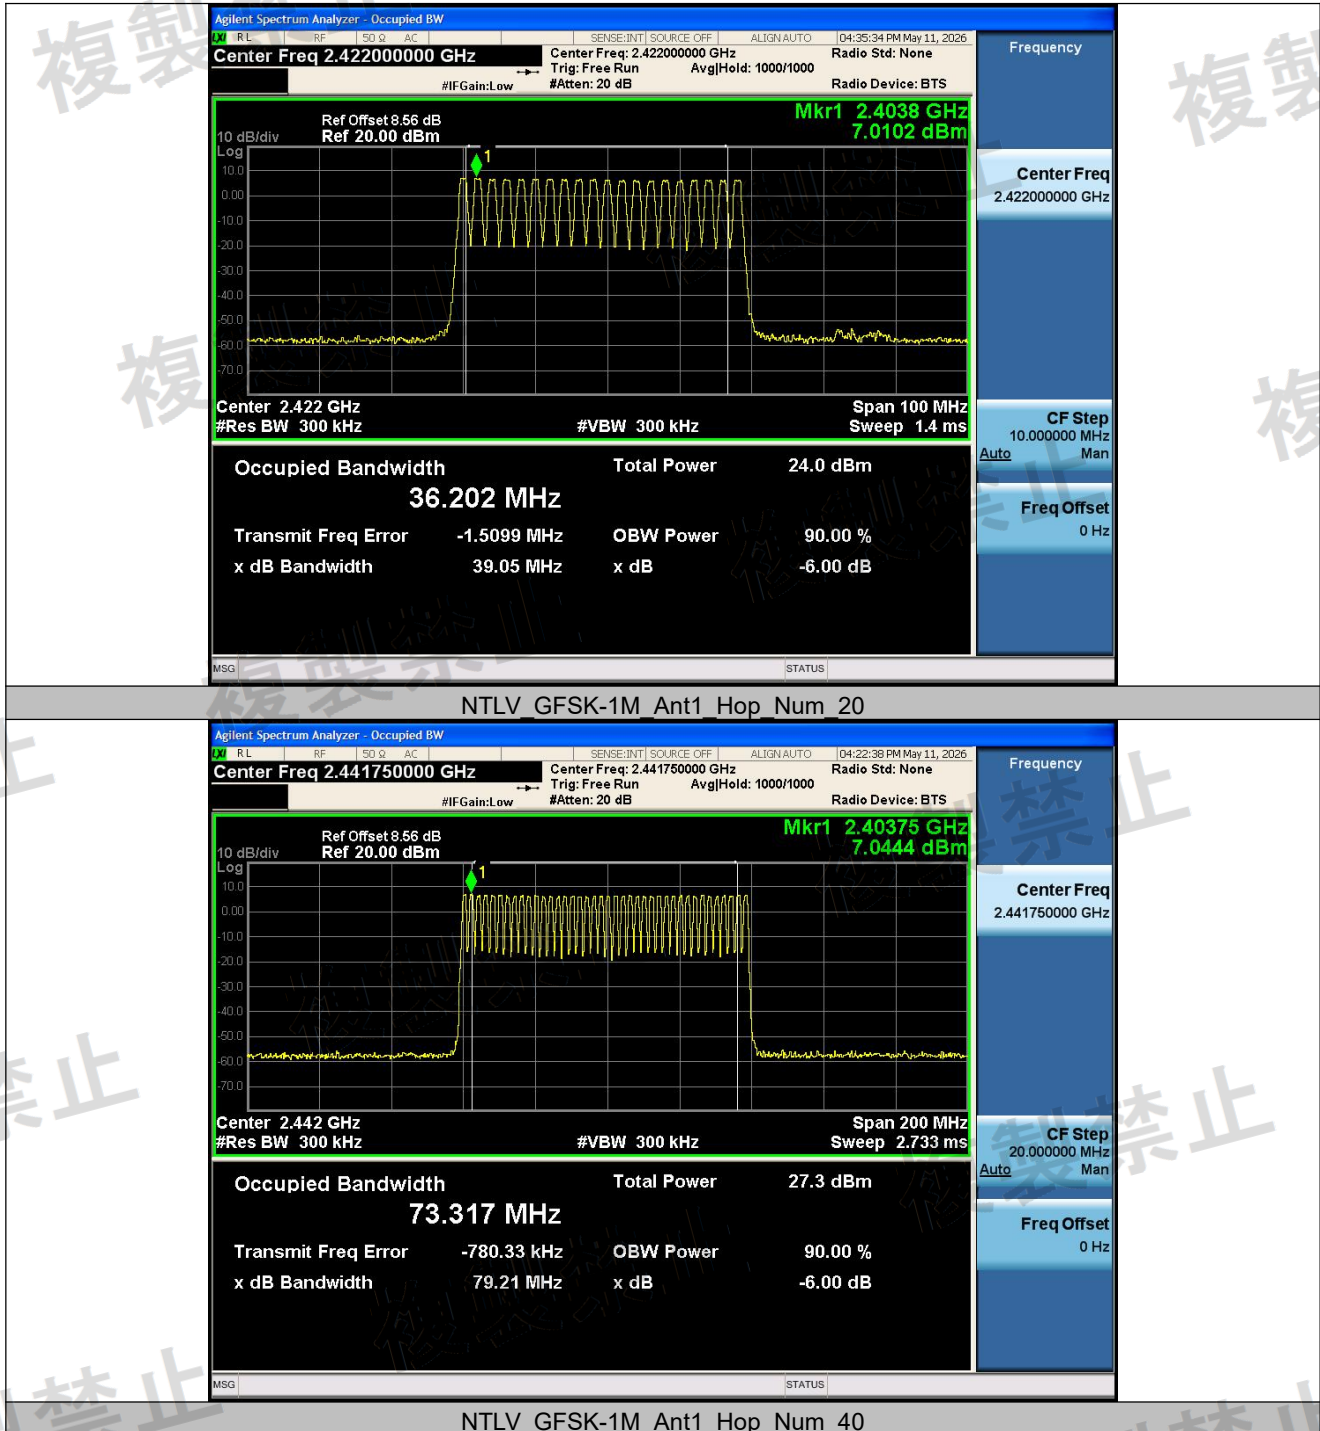

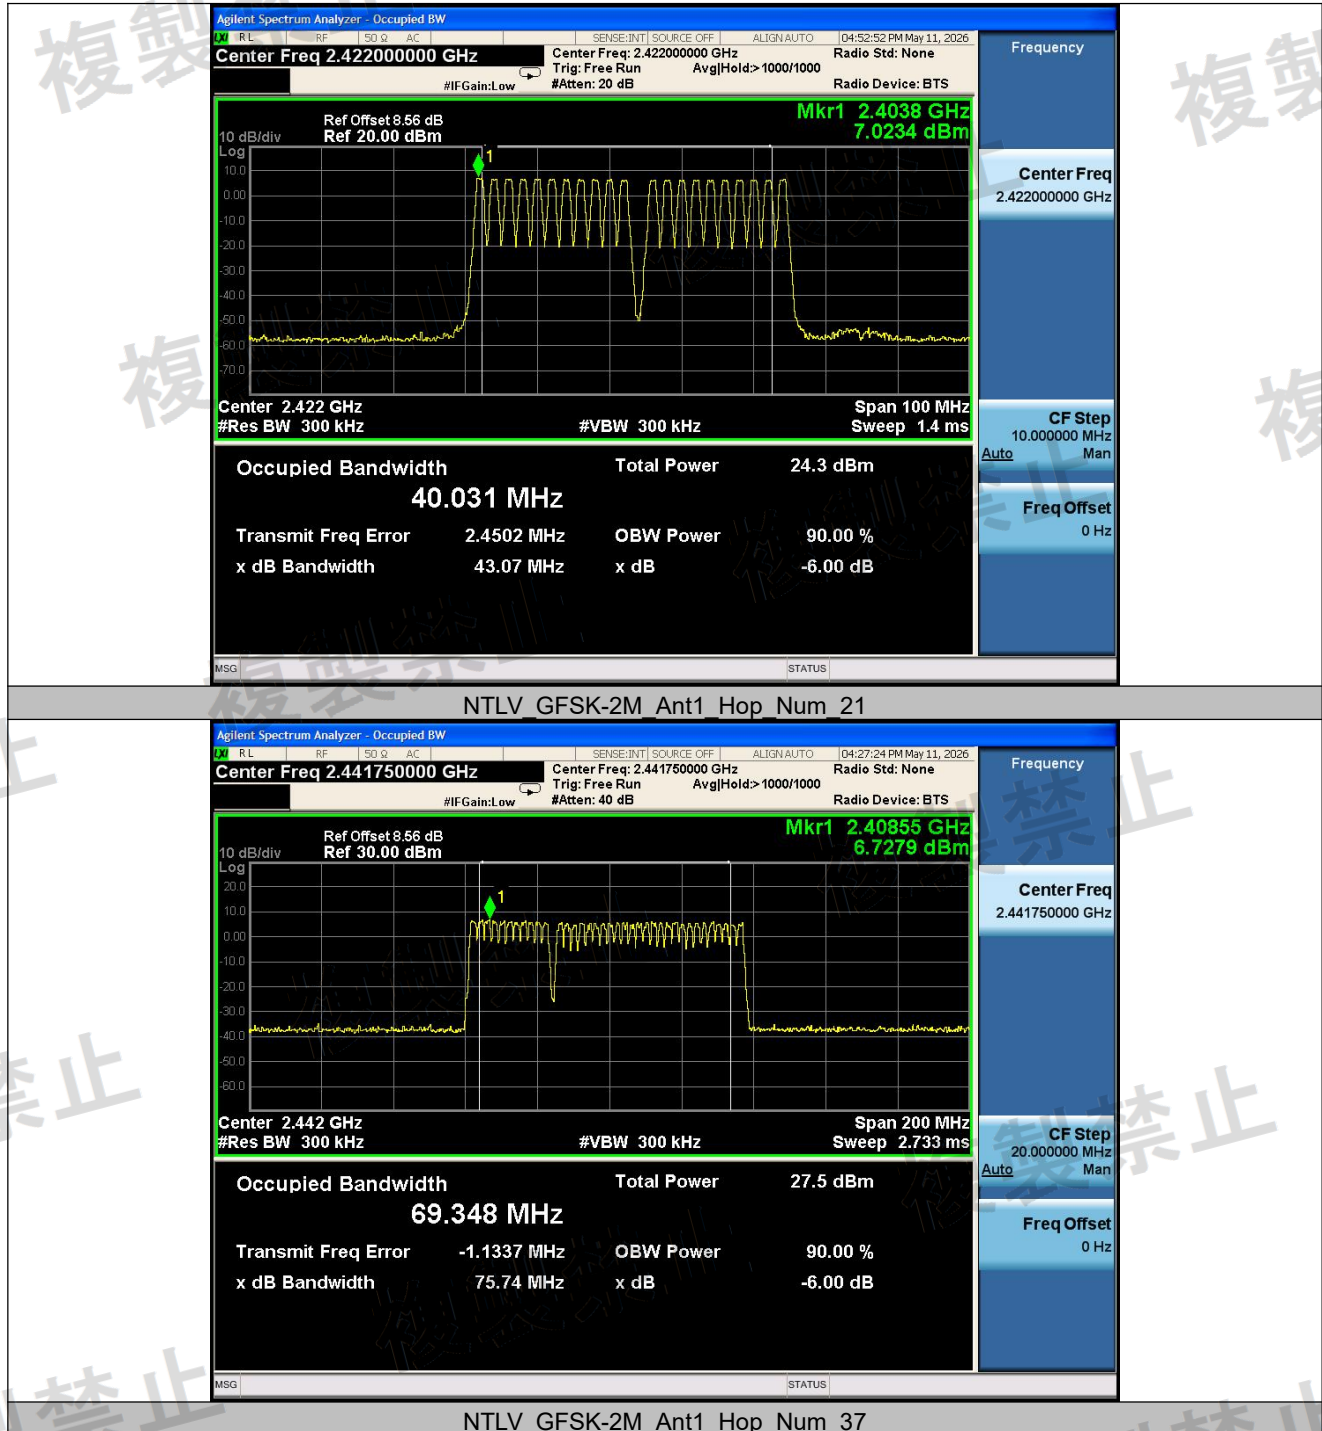

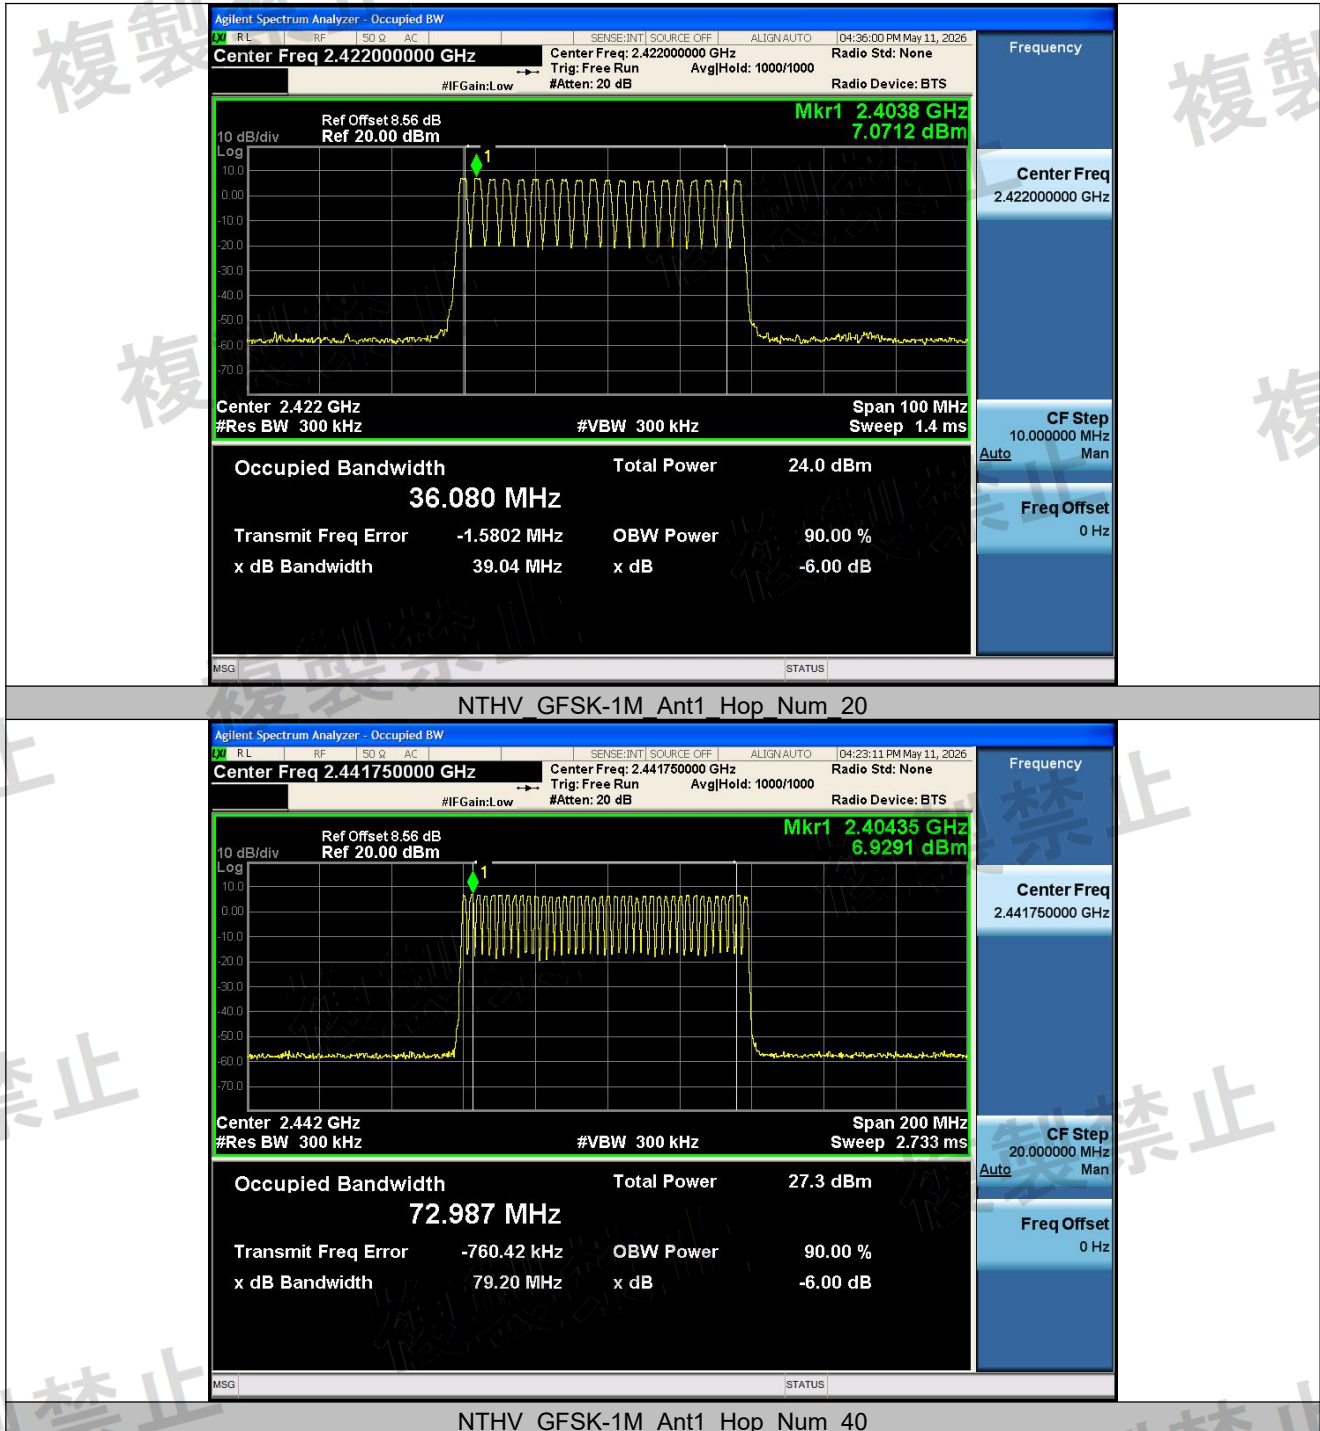

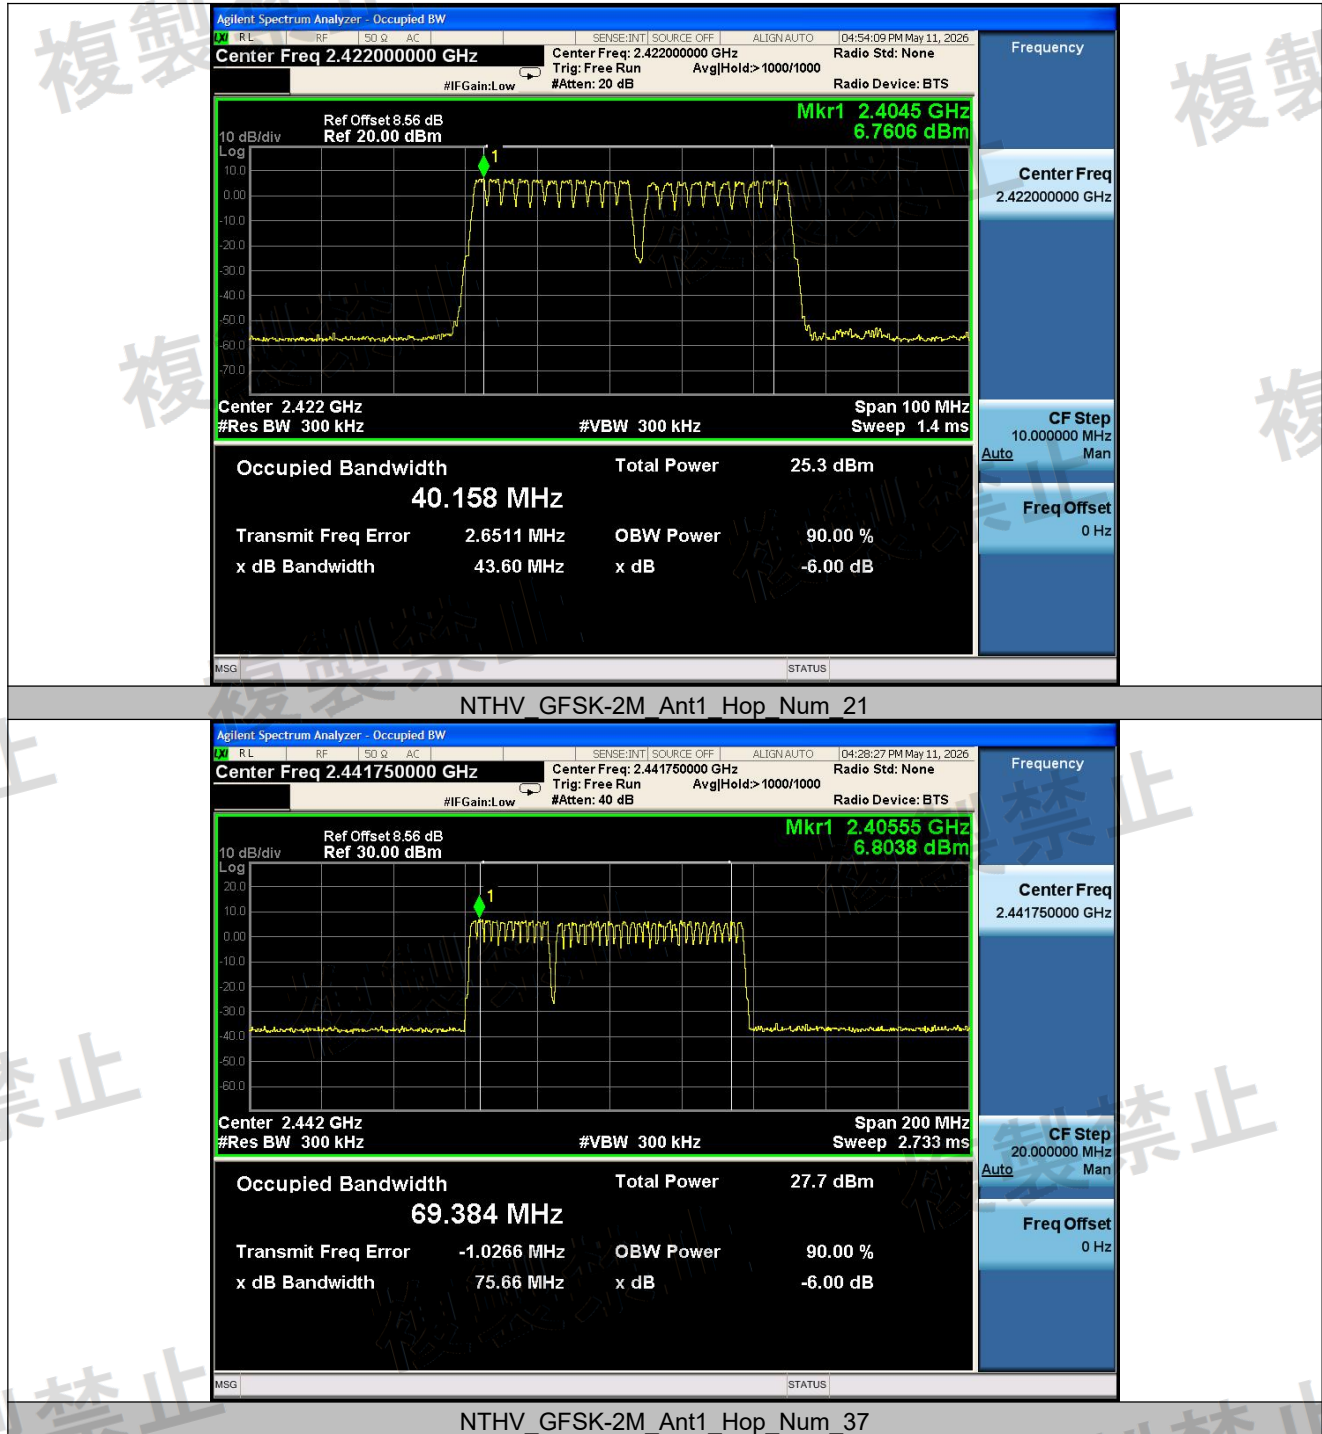


3.4 Spurious emissions for transmitter measurement

3.4.1 Limit of Spurious emissions for transmitter measurement

Frequencies (MHz)	Limit
Operating frequency 2400 to 2483.5MHz	
30.0MHz to 2387MHz	$\leq 2.5\mu\text{W}(-26\text{dBm})/\text{MHz}$
2387.0MHz to 2400.0MHz	$\leq 25\mu\text{W}(-16\text{dBm})/\text{MHz}$
2483.5MHz to 2496.5MHz	$\leq 25\mu\text{W}(-16\text{dBm})/\text{MHz}$
2496.5MHz to 12500.0MHz	$\leq 2.5\mu\text{W}(-26\text{dBm})/\text{MHz}$

3.4.2 Test Setup

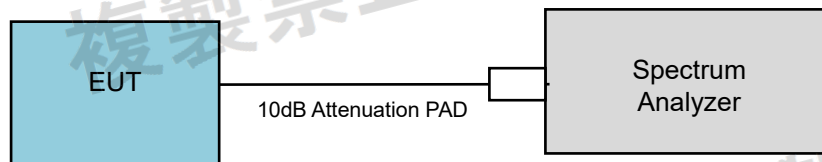

3.4.3 Deviation from Test Standard

No deviation.

3.4.4 Test Procedure

Test method according to Clause 5 of Annex No.43 of MIC Notification No.88.

The EUT was placed inside the environmental test chamber and powered by nominal DC voltage. The spurious emissions for transmitter was measured by spectrum analyzer.


The settings of the spectrum analyzer during spurious searches are as follows:


- Sweep Bandwidth Starts spurious searches from the smallest possible frequencies to more than 5 times the carrier frequencies (for example from 30 MHz up to 12.5 GHz for a 2.4 GHz system).
- Resolution Bandwidth 1 MHz
- Video Bandwidth 1 MHz
- Y-Axis Scale 10 dB/Div
- Input Level: Maximum dynamic range value
- Sweep Time: Minimum amount of time to ensure measurement accuracy.
- Sweep Points: Over 400 points
- Detection Mode: Positive peak
- Display mode: Maximum hold


3.4.5 Test Results


Normal mode:


Test Condition	Test Mode	Antenna	Channel	Freq.Range [MHz]	Freq. [MHz]	Result [dBm]	Limit [dBm]	Result [uW/MHz]	Limit [uW/MHz]	Verdict
NTNV	GFSK-1M	Ant1	Hop	30~2387	2384.05	-58.51	≤-26	0.001409289	≤2.5	PASS
				2387~2400	2400.00	-29.95	≤-16	1.011579454	≤25	PASS
				2483.5~2497	2495.93	-60.31	≤-16	0.000931108	≤25	PASS
				2497~13000	5899.10	-57.89	≤-26	0.001625549	≤2.5	PASS
	GFSK-2M	Ant1	Hop	30~2387	706.75	-40.03	≤-26	0.099311605	≤2.5	PASS
				2387~2400	2399.43	-48.90	≤-16	0.012882496	≤25	PASS
				2483.5~2497	2488.75	-61.17	≤-16	0.000763836	≤25	PASS
				2497~13000	12963.20	-58.58	≤-26	0.001386756	≤2.5	PASS
NTLV	GFSK-1M	Ant1	Hop	30~2387	2379.93	-58.98	≤-26	0.001264736	≤2.5	PASS
				2387~2400	2400.00	-29.87	≤-16	1.03038612	≤25	PASS
				2483.5~2497	2483.84	-60.47	≤-16	0.000897429	≤25	PASS
				2497~13000	5549.80	-58.20	≤-26	0.001513561	≤2.5	PASS
	GFSK-2M	Ant1	Hop	30~2387	2340.74	-57.52	≤-26	0.001770109	≤2.5	PASS
				2387~2400	2399.61	-49.80	≤-16	0.010471285	≤25	PASS
				2483.5~2497	2495.96	-61.00	≤-16	0.000794328	≤25	PASS
				2497~13000	12602.40	-58.42	≤-26	0.001438799	≤2.5	PASS
NTHV	GFSK-1M	Ant1	Hop	30~2387	2260.61	-58.49	≤-26	0.001415794	≤2.5	PASS
				2387~2400	2400.00	-30.27	≤-16	0.939723311	≤25	PASS
				2483.5~2497	2493.10	-59.58	≤-16	0.001101539	≤25	PASS
				2497~13000	2521.70	-48.41	≤-26	0.014421154	≤2.5	PASS
	GFSK-2M	Ant1	Hop	30~2387	728.85	-44.24	≤-26	0.03767038	≤2.5	PASS
				2387~2400	2399.75	-48.89	≤-16	0.012912193	≤25	PASS
				2483.5~2497	2495.27	-60.54	≤-16	0.00088308	≤25	PASS
				2497~13000	5957.40	-58.42	≤-26	0.001438799	≤2.5	PASS

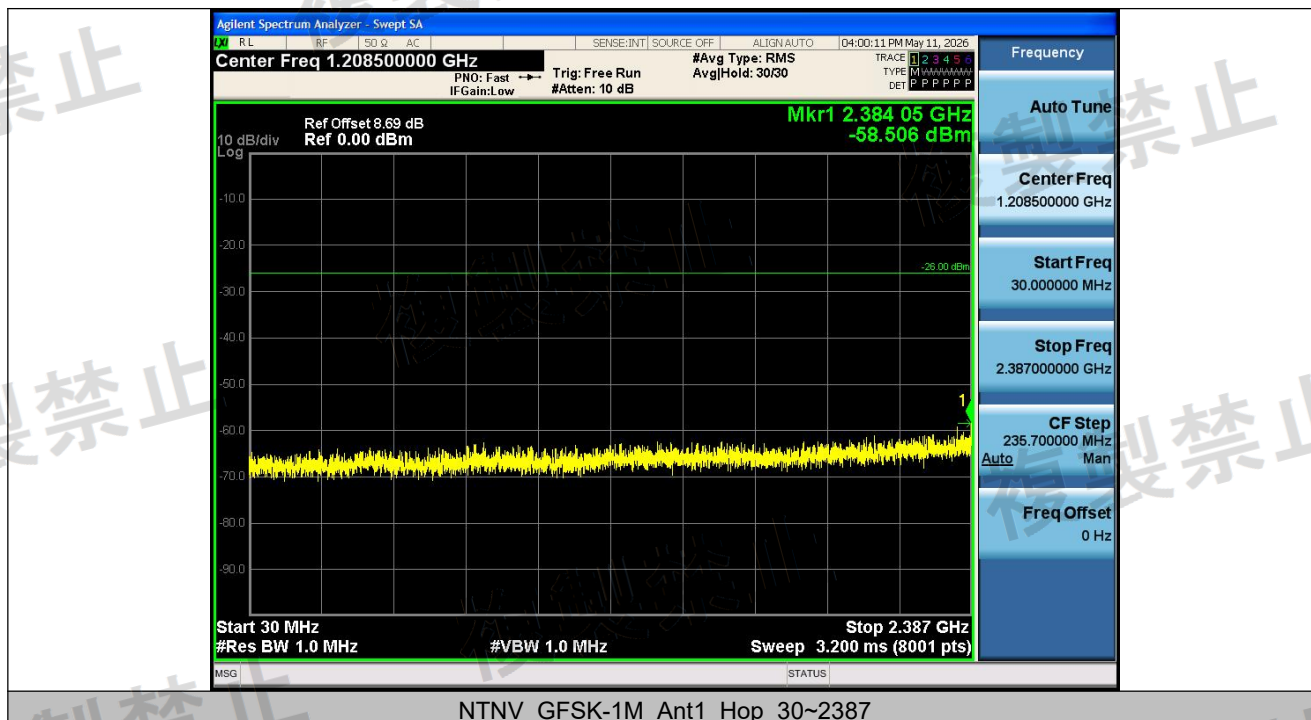


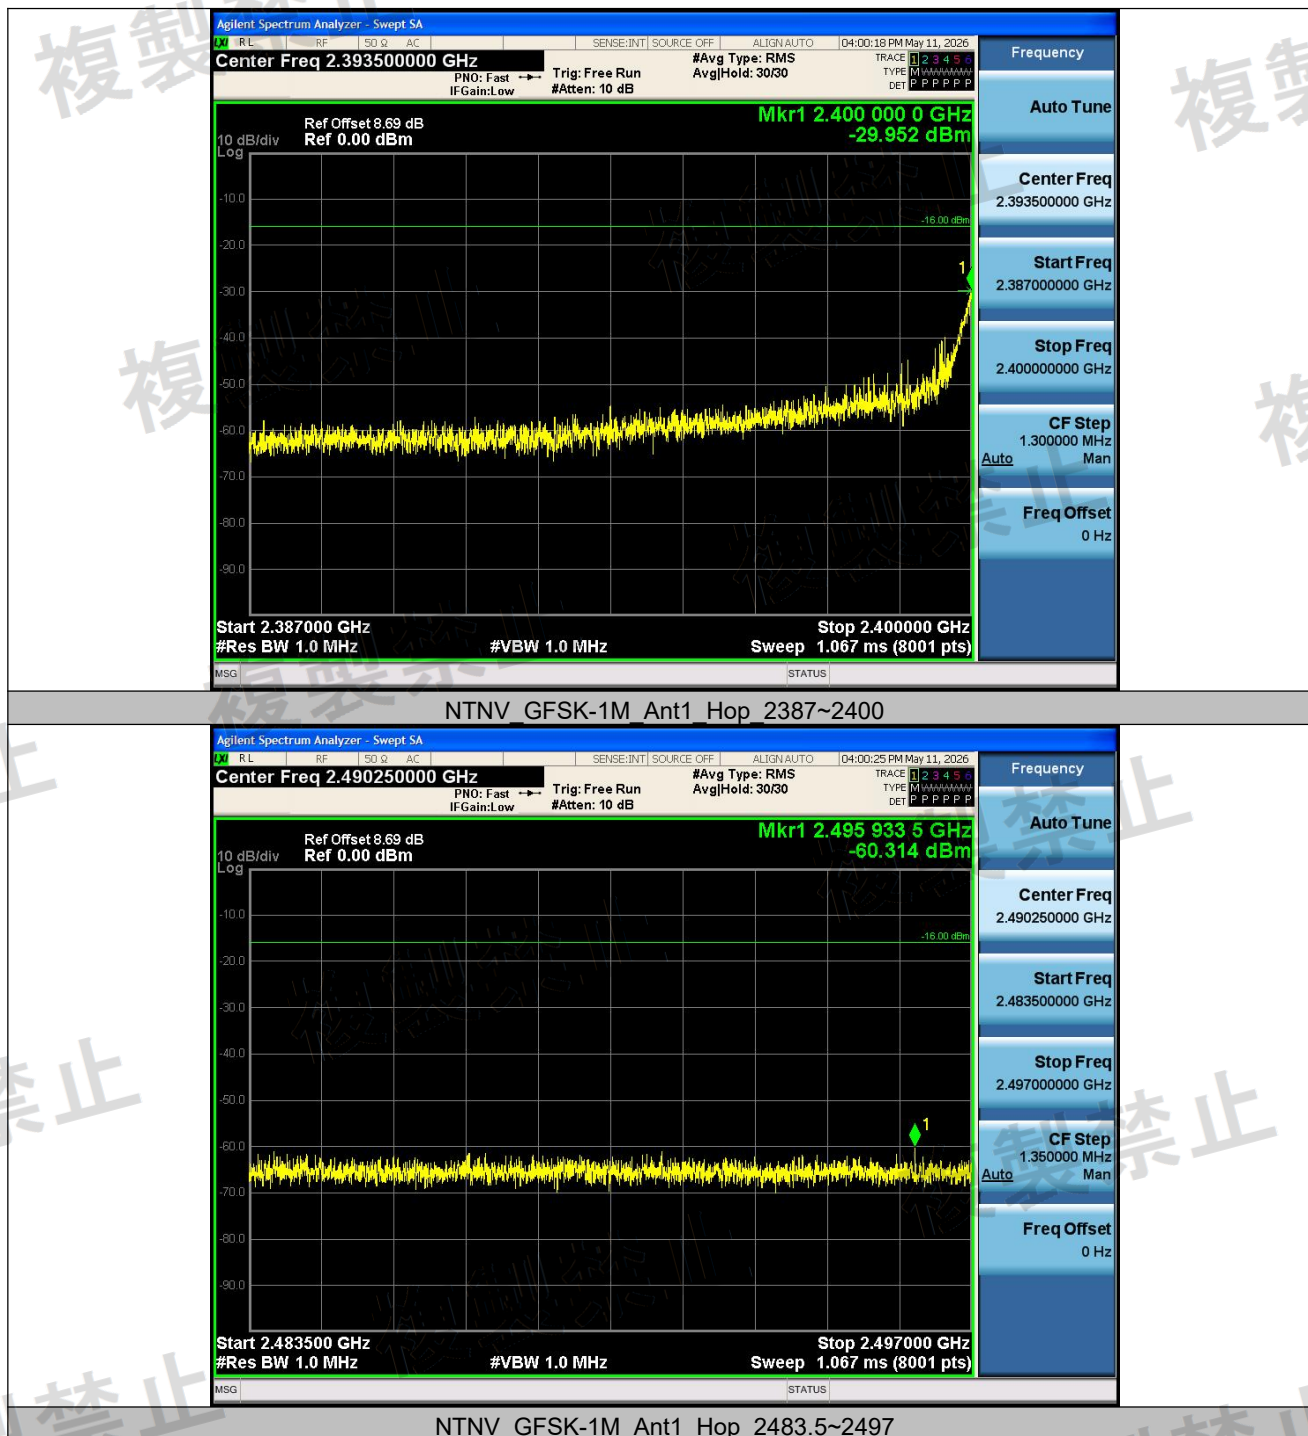


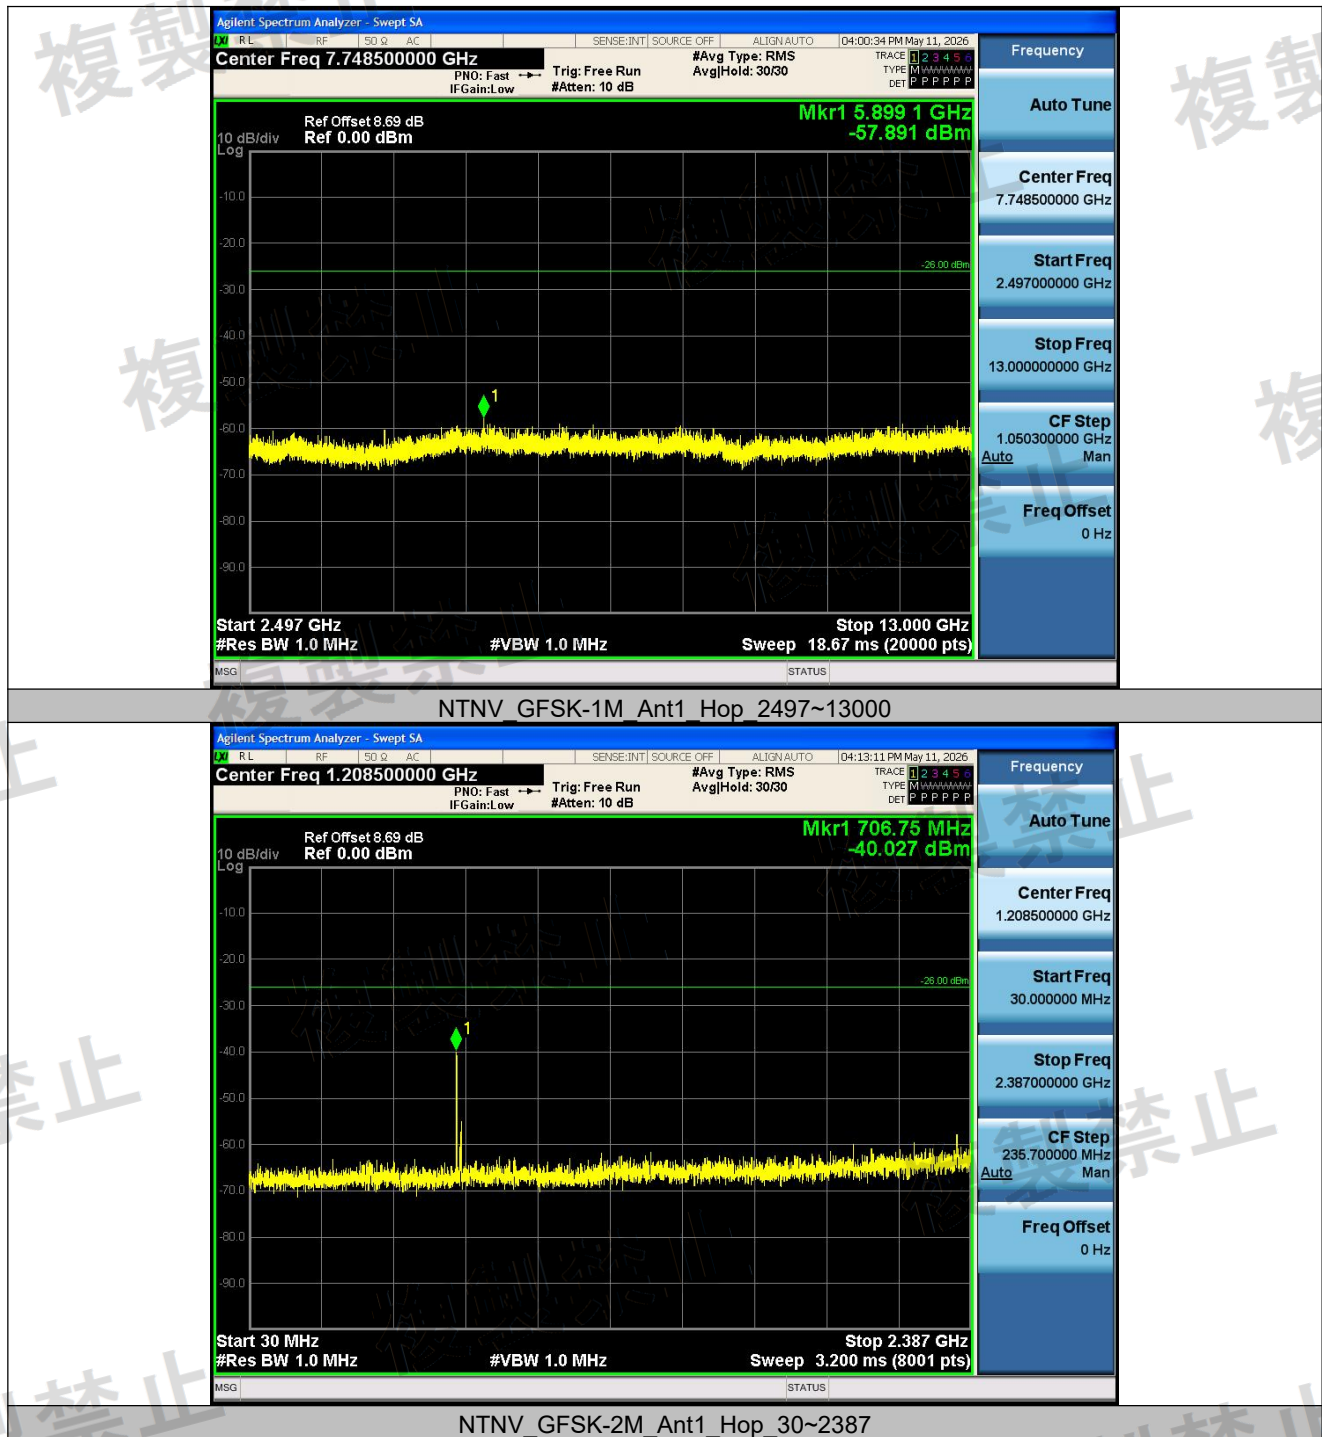


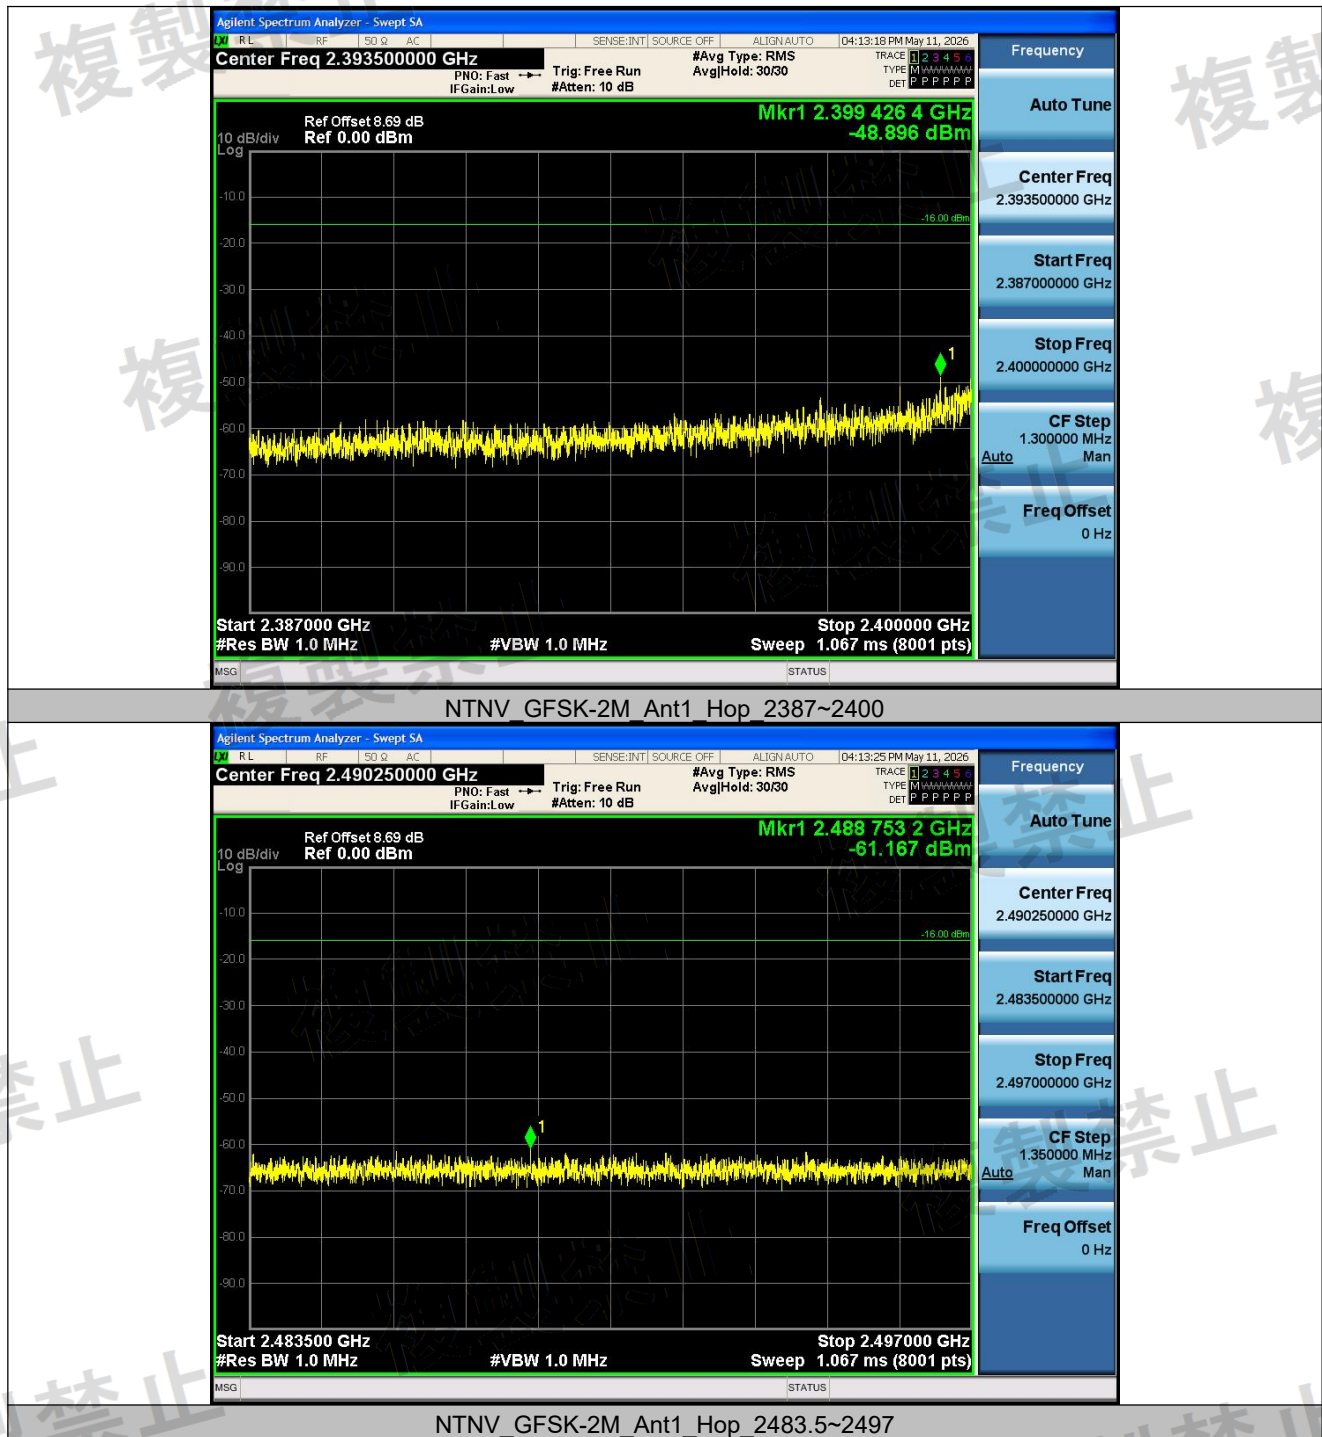


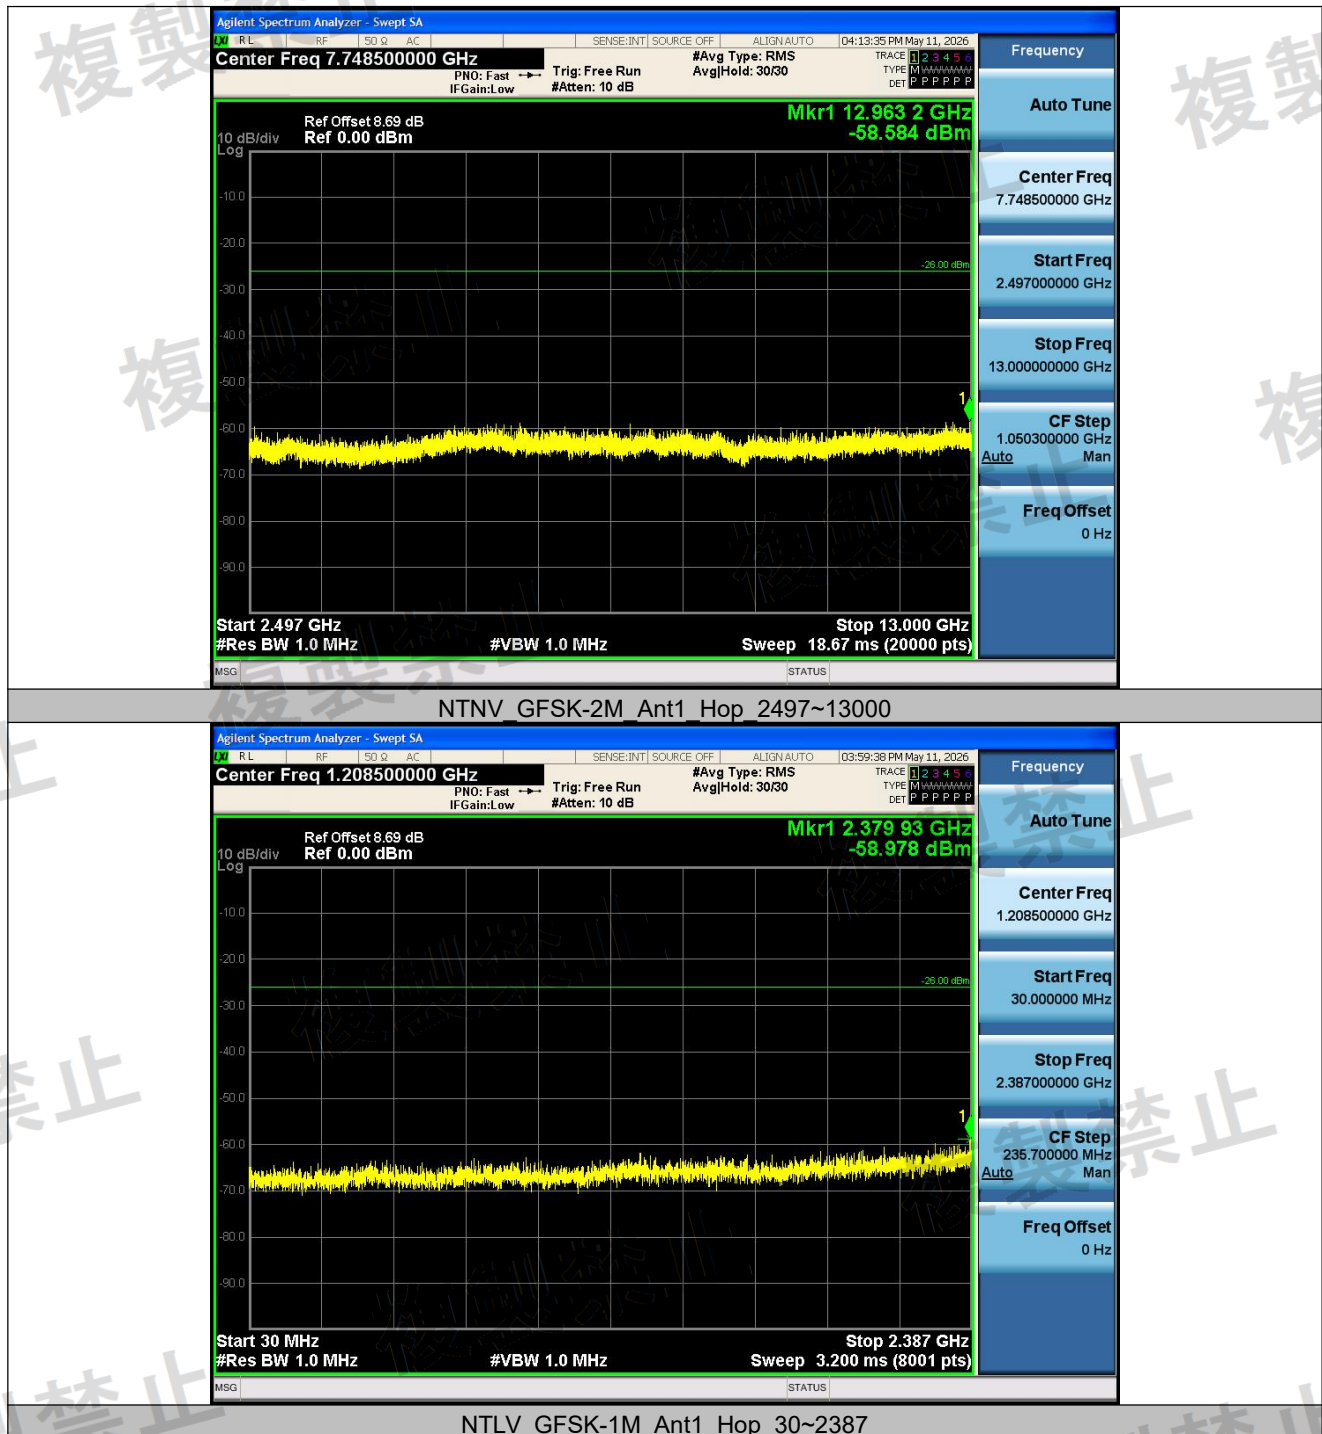


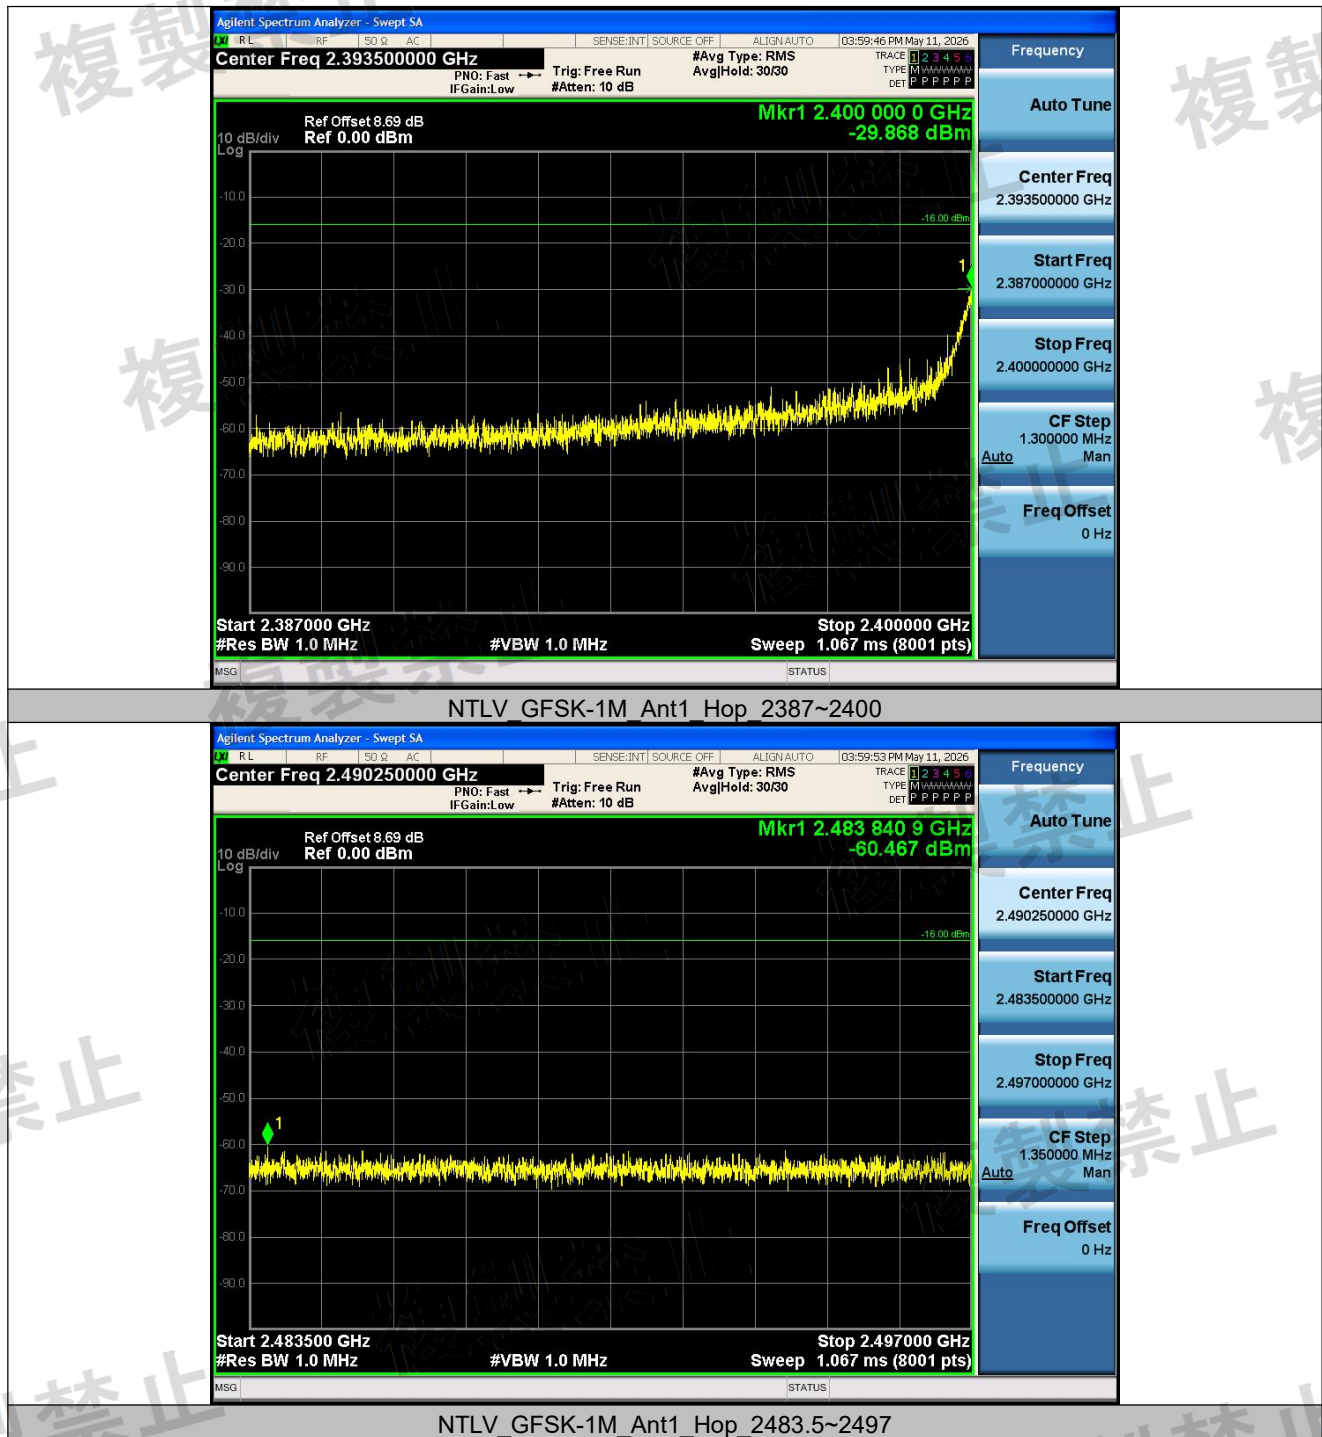

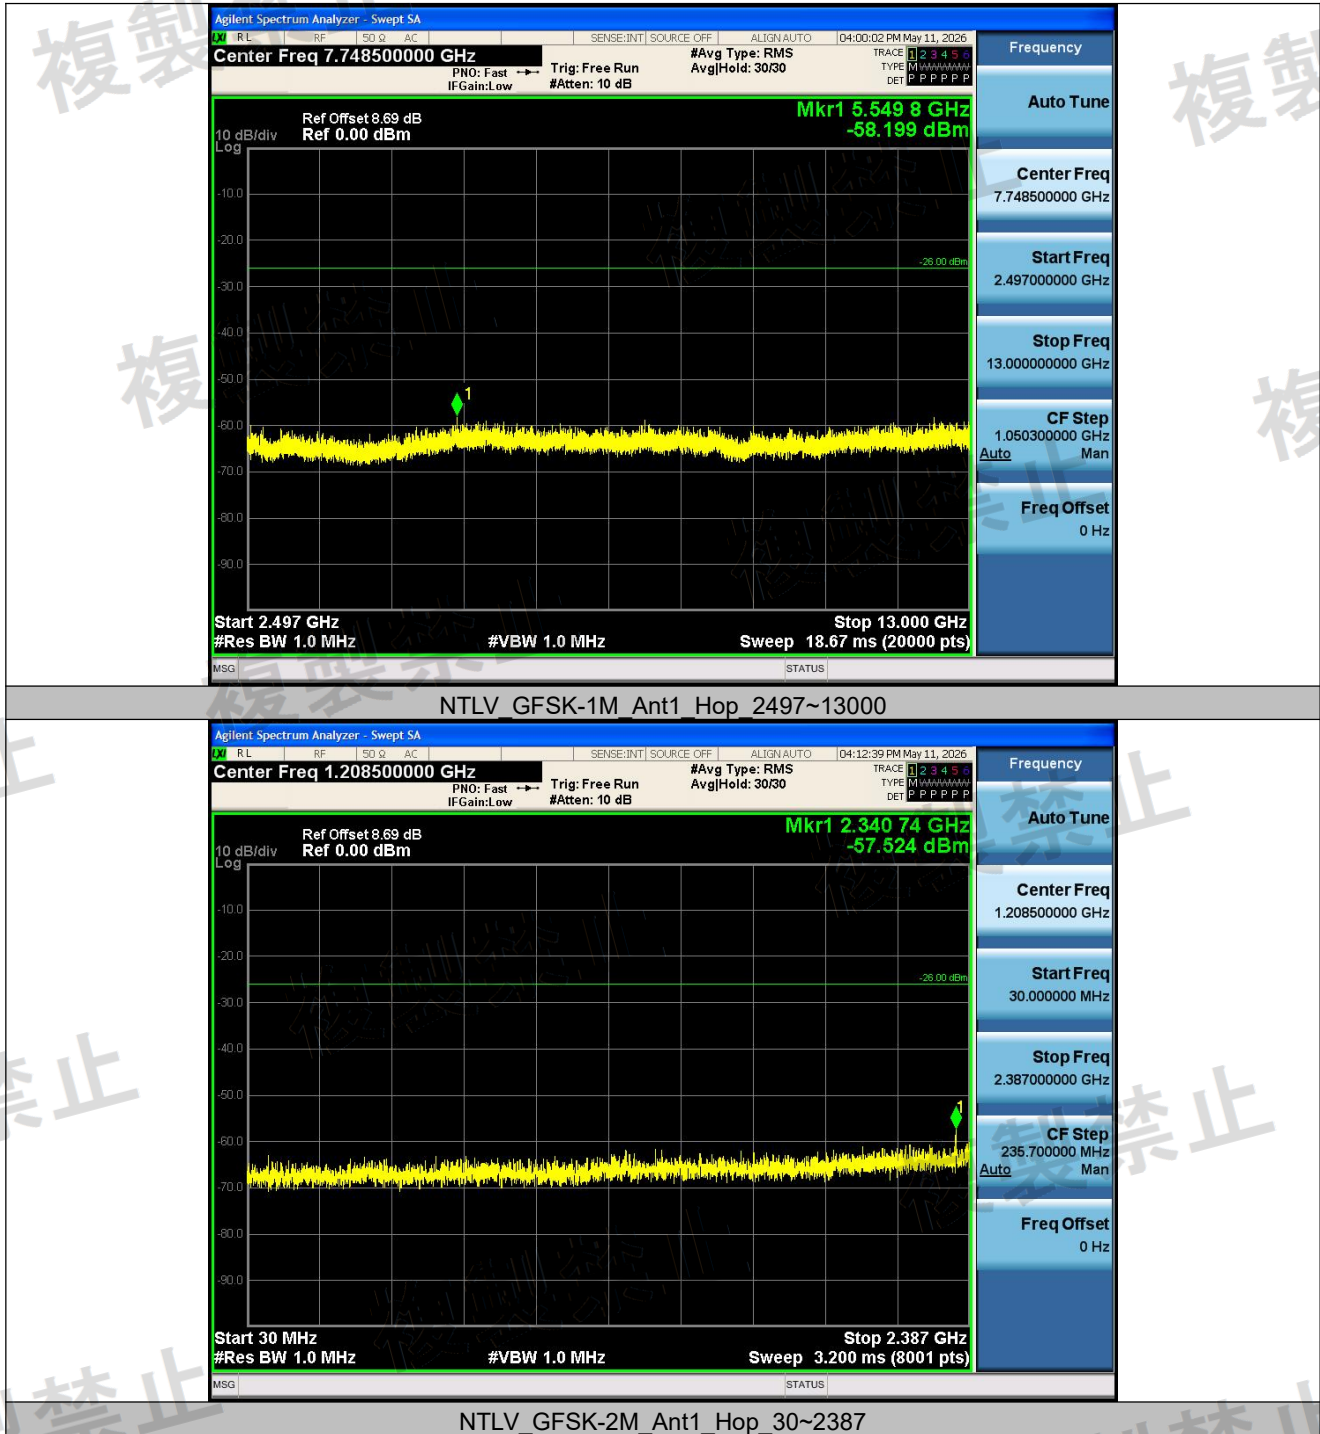


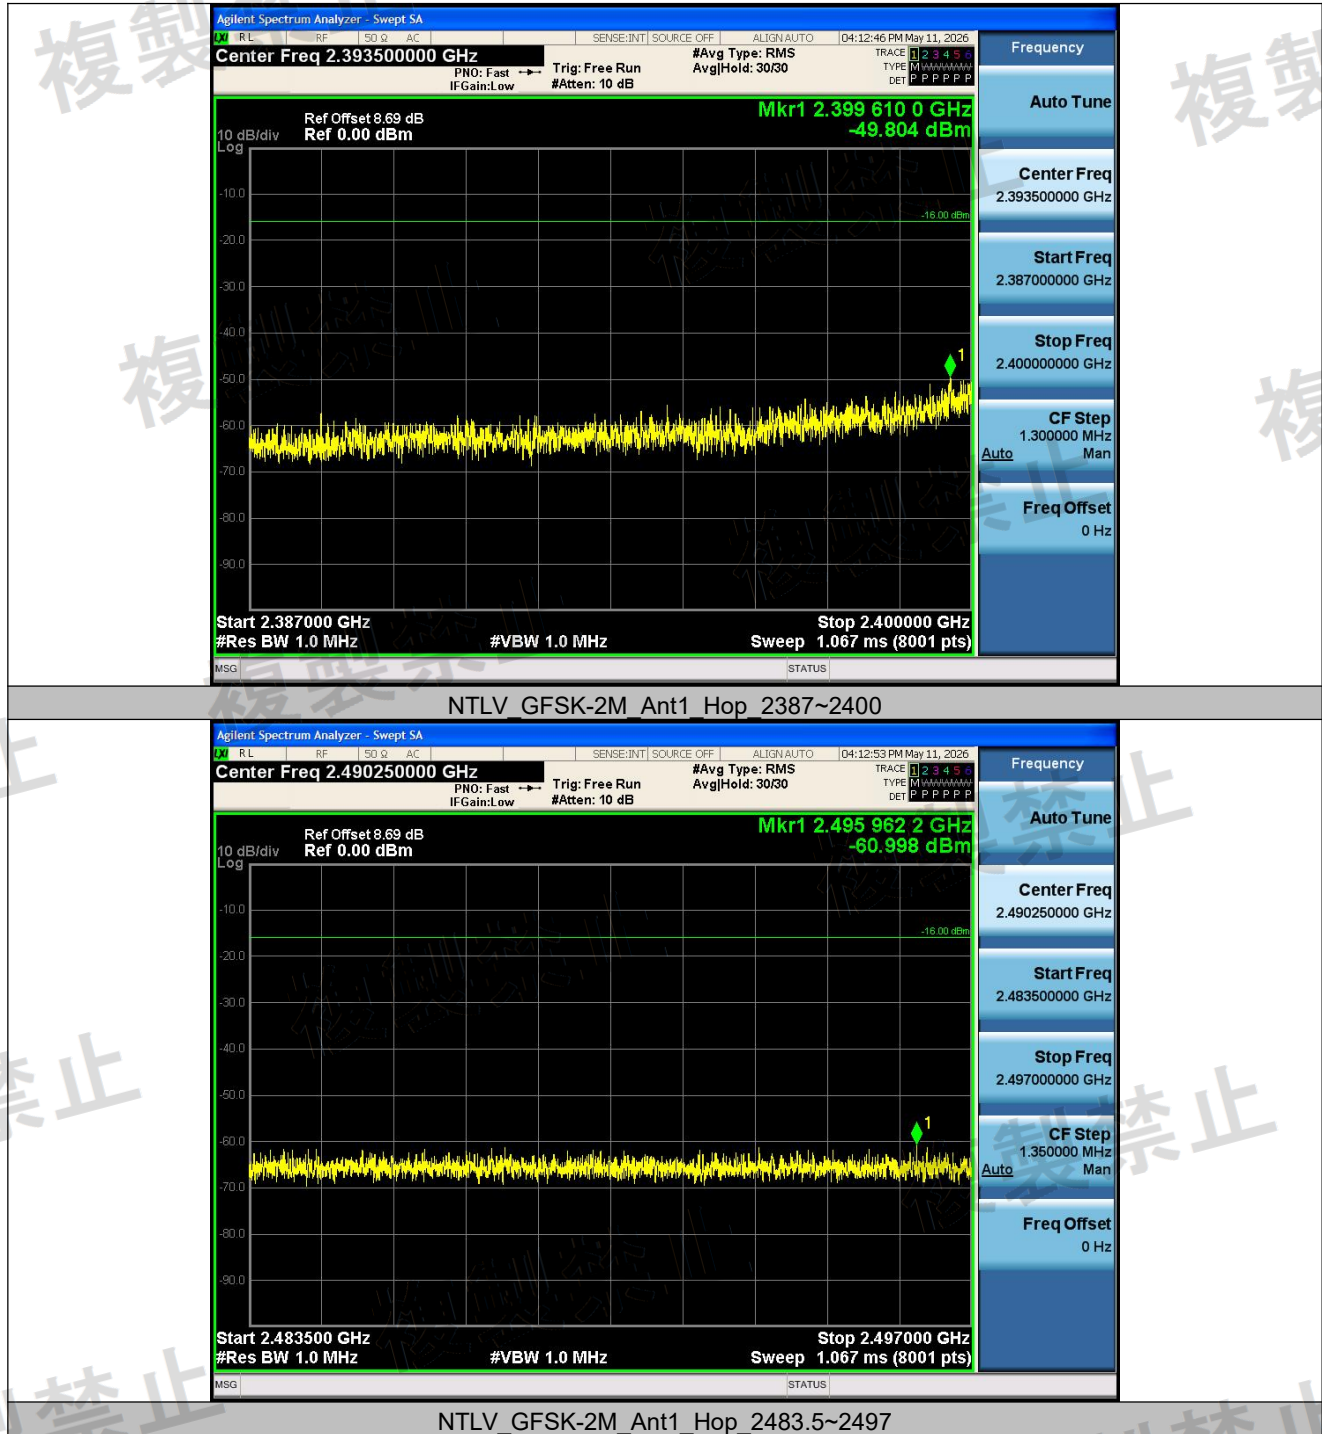


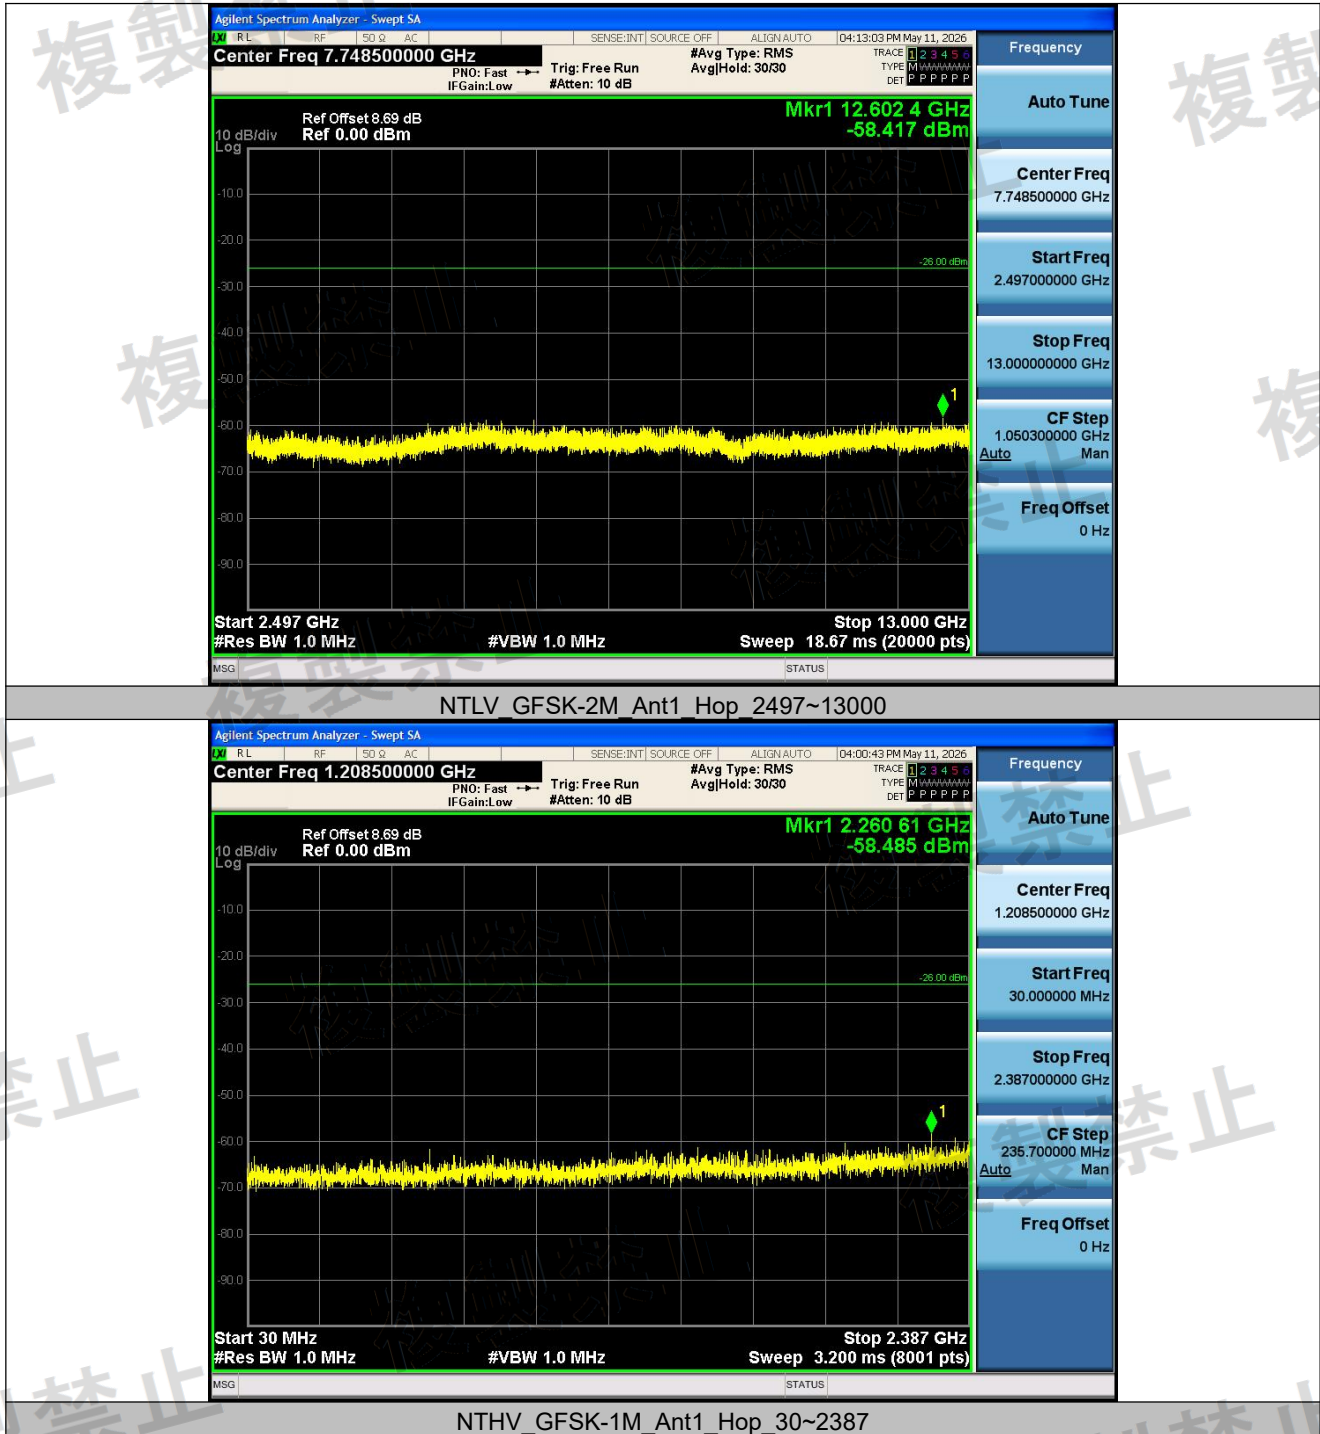


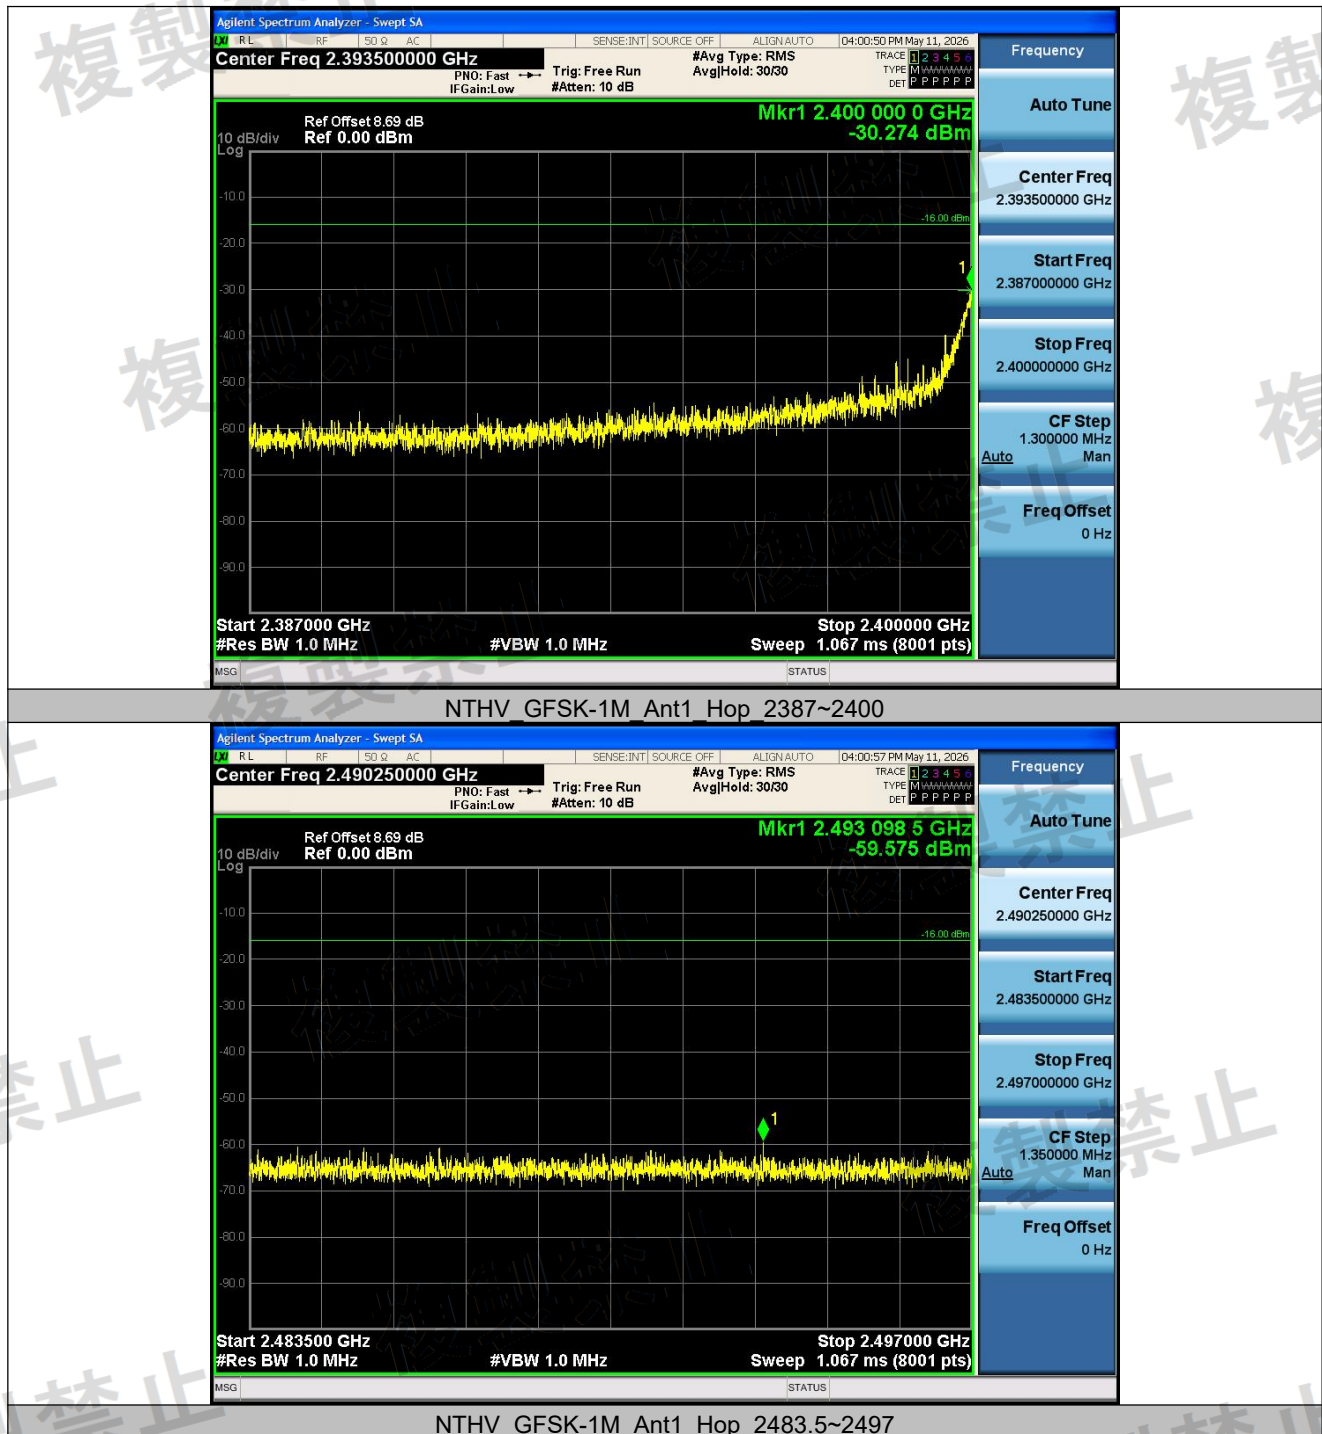

Test Report No.: 26050601-RF-JP-01

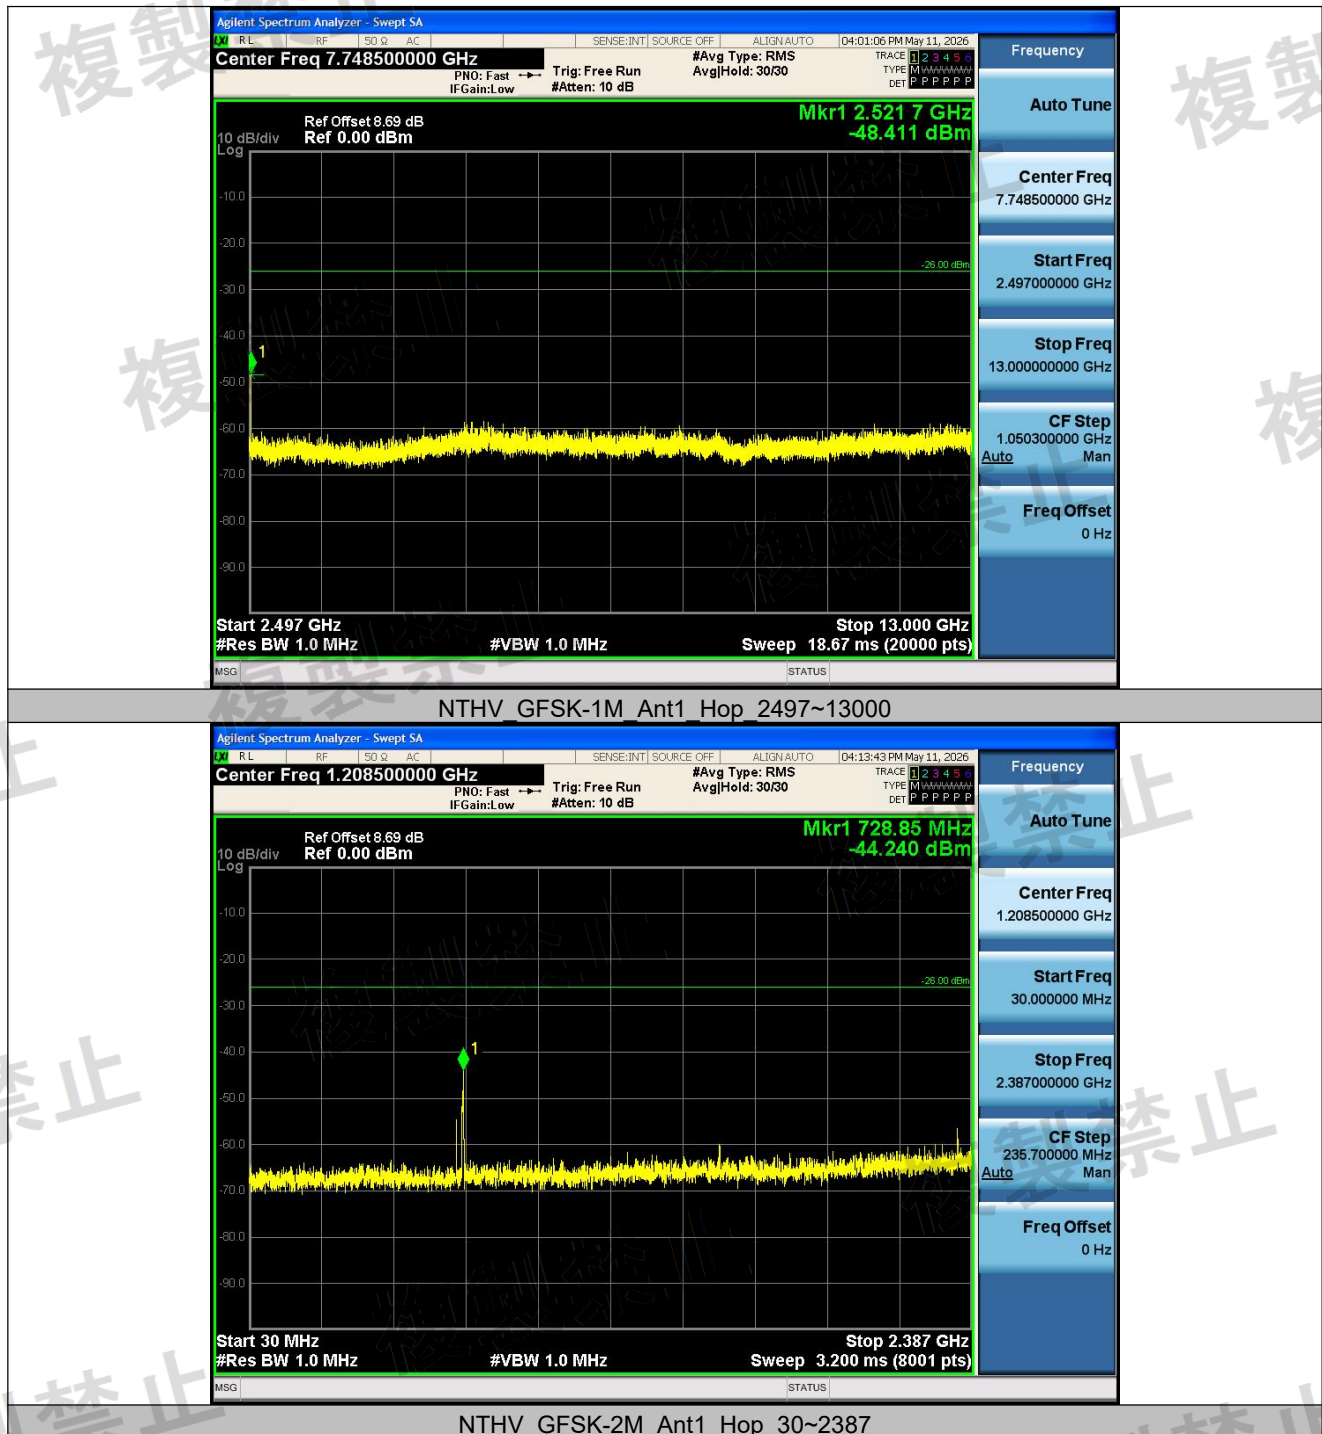

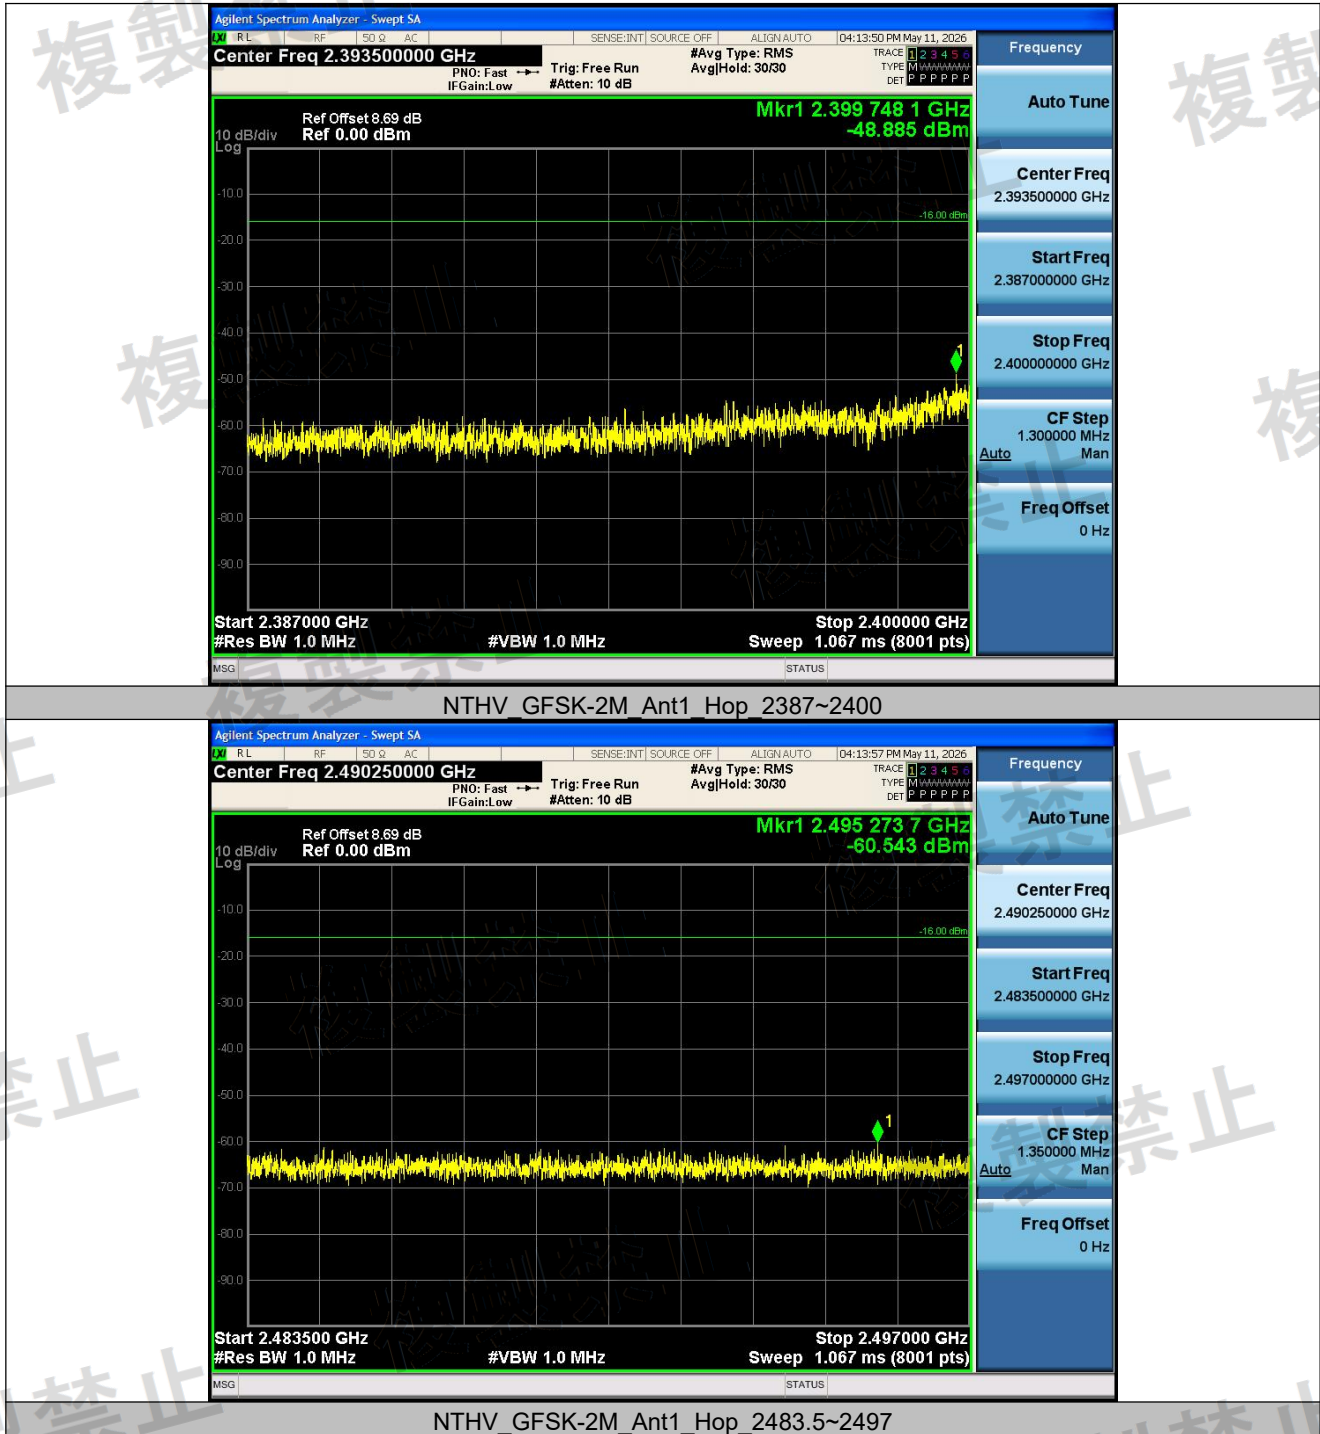

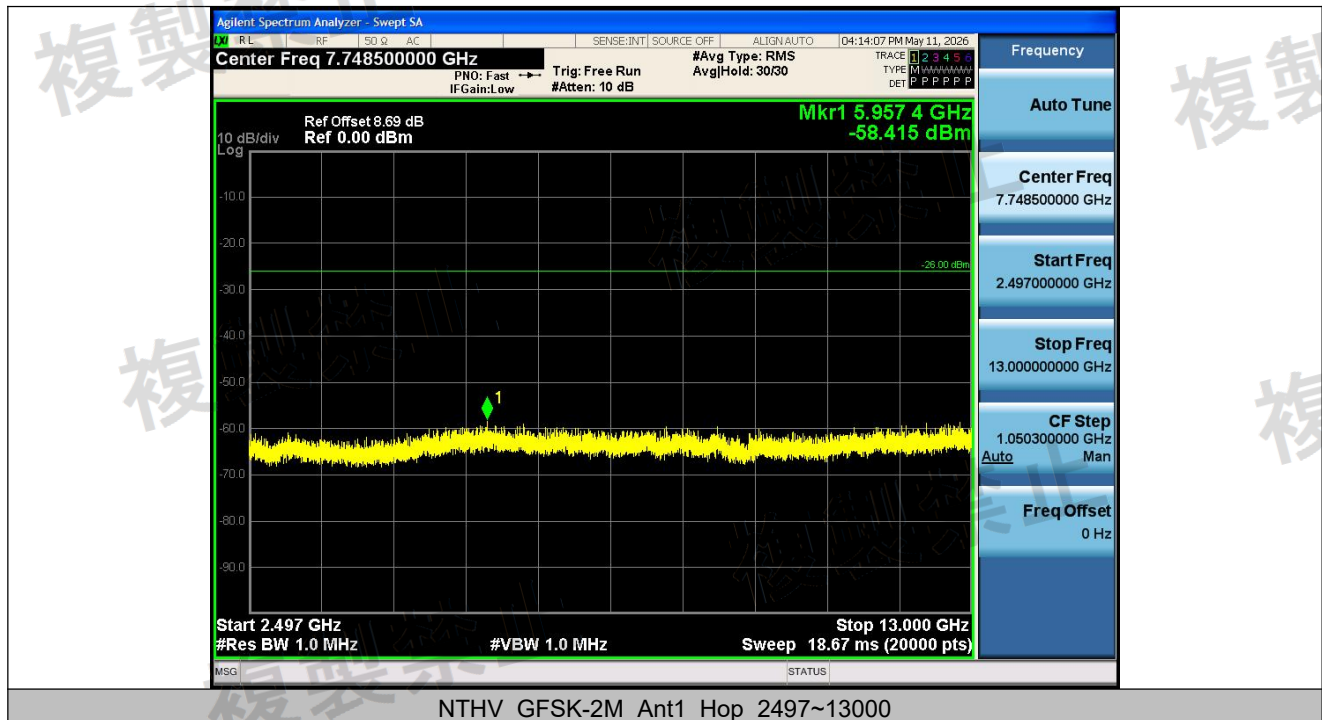

3.5 Antenna power measurement


3.5.1 Limits of antenna power

Antenna power shall be 3mW/MHz or less.

EIRP power shall be 6.91dBm/MHz or less.

Tolerance of antenna power shall be +20% (upper value).

3.5.2 Test Setup

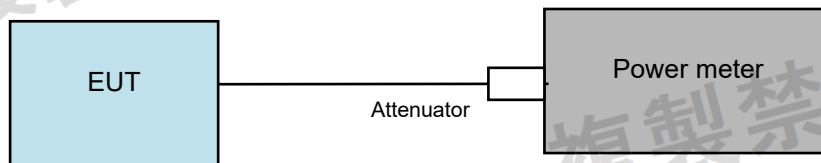

3.5.3 Deviation from Test Standard

No deviation.

3.5.4 Test Procedure

Test method according to Clause 6 of Annex No.43 of MIC Notification No.88.

The EUT was placed inside the environmental test chamber and powered by nominal DC voltage. The Antenna power was measured by power meter.

- Connect the high frequency power meter to the IF output of the spectrum analysers.
- Recording the power level.

3.5.5 Test result Disable AFH Function

Test Condition	Conducted output power (dBm)	
	GFSK 1M	GFSK 2M
Voltage normal	7.105	7.021
Voltage high	7.100	6.982
Voltage low	7.104	7.009

Test condition	Conducted power density (mW/MHz)			
	Hopping mode			
	GFSK 1M		GFSK 2M	
	Power	Tolerance (%)	Power	Tolerance (%)
Voltage normal	0.070967	-29.033	0.072316	-27.684
Voltage high	0.070267	-29.733	0.071935	-28.065
Voltage low	0.070016	-29.984	0.072421	-27.579
Rated power	0.1		0.1	

Note: 1. Conducted power density=Conducted output power/Spread-Spectrum
2. Tolerance of antenna power shall be +20% (upper value).

Test condition	EIRP power density (dBm/MHz)	
	Hopping mode	
	GFSK 1M	GFSK 2M
Voltage normal	-10.449428	-10.367648
Voltage high	-10.492507	-10.390586
Voltage low	-10.508003	-10.361367

Note:

1. The value of EIRP densities are "calculated" values.
2. Formula: EIRP output power = Conducted RF output power + Antenna Gain.

3.5.6 Test result of for Enable AFH Function

Test Condition	Conducted output power (dBm)	
	GFSK 1M	GFSK 2M
Voltage normal	7.057	7.011
Voltage high	7.034	7.002
Voltage low	7.078	7.01

Test condition	Conducted power density (mW/MHz)			
	Hopping mode			
	GFSK 1M		GFSK 2M	
	Power	Tolerance (%)	Power	Tolerance (%)
Voltage normal	0.140543	-29.7285	0.125703	-37.1485
Voltage normal	0.140002	-29.999	0.124861	-37.5695
Voltage high	0.140951	-29.5245	0.125488	-37.256
Rated power	0.2		0.2	

Note: 1. Conducted power density=Conducted output power/Spread-Spectrum

2. Tolerance of antenna power shall be +20% (upper value).

Test condition	EIRP power density (dBm/MHz)	
	Hopping mode	
	GFSK 1M	GFSK 2M
Voltage normal	-7.481915	-7.966543
Voltage high	-7.498656	-7.995736
Voltage low	-7.469311	-7.973973

Note:

1. The value of EIRP densities are "calculated" values.


2. Formula: EIRP output power = Conducted RF output power + Antenna Gain.

3.6 Spurious emissions for receiver

3.6.1 Limits of spurious emissions for receiver

Frequencies(MHz)	Limit
Below 1GHz	$\leq 4\text{nW}$ (-54dBm)
Above 1GHz	$\leq 20\text{nW}$ (-47dBm)

3.6.2 Test Setup

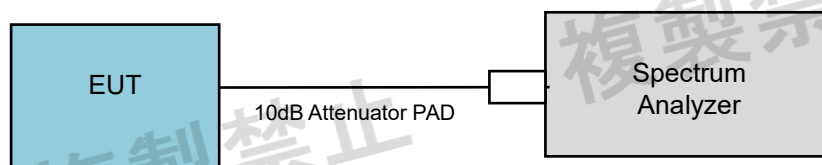

3.6.3 Deviation from Test Standard

No deviation.

3.6.4 Test Procedure

Test method according to Clause 7 of Annex No.43 of MIC Notification No.88.

The EUT was placed inside the environmental test chamber and powered by nominal DC voltage. The spurious emissions for receiver was measured by spectrum analyzer.


The settings of the spectrum analyzer during spurious searches are as follows:


- Sweep Bandwidth Starts spurious searches from the smallest possible frequencies to more than 5 times the carrier frequencies (for example from 30 MHz up to 12.5 GHz for a 2.4 GHz system).
- Resolution Bandwidth 1 MHz
- Video Bandwidth 1 MHz
- Y-Axis Scale 10 dB/Div
- Input Level: Maximum dynamic range value
- Sweep Time: Minimum amount of time to ensure measurement accuracy.
- Sweep Points: Over 400 points
- Detection Mode: Positive peak
- Display mode: Maximum hold


3.6.5 Test Results


Normal mode:


Test Condition	Test Mode	Antenna	Channel	Freq.Range [MHz]	Freq. [MHz]	Result [dBm]	Limit [dBm]	Result [nW]	Limit [nW]	Verdict
NTNV	GFSK-1M	Ant1	Hop	30~1000	716.52	-71.22	≤-54	0.07551	≤4	PASS
				1000~13000	2410.70	-58.1	≤-47	1.54882	≤20	PASS
	GFSK-2M	Ant1	Hop	30~1000	659.17	-72.44	≤-54	0.05702	≤4	PASS
				1000~13000	11916.30	-59.33	≤-47	1.16681	≤20	PASS
NTLV	GFSK-1M	Ant1	Hop	30~1000	922.76	-71.73	≤-54	0.06714	≤4	PASS
				1000~13000	2410.70	-57.04	≤-47	1.97697	≤20	PASS
	GFSK-2M	Ant1	Hop	30~1000	365.50	-72.46	≤-54	0.05675	≤4	PASS
				1000~13000	12989.20	-58.37	≤-47	1.45546	≤20	PASS
NTHV	GFSK-1M	Ant1	Hop	30~1000	772.29	-71.54	≤-54	0.07015	≤4	PASS
				1000~13000	2409.50	-58.01	≤-47	1.58125	≤20	PASS
	GFSK-2M	Ant1	Hop	30~1000	804.06	-71.91	≤-54	0.06442	≤4	PASS
				1000~13000	11461.50	-58.15	≤-47	1.53109	≤20	PASS

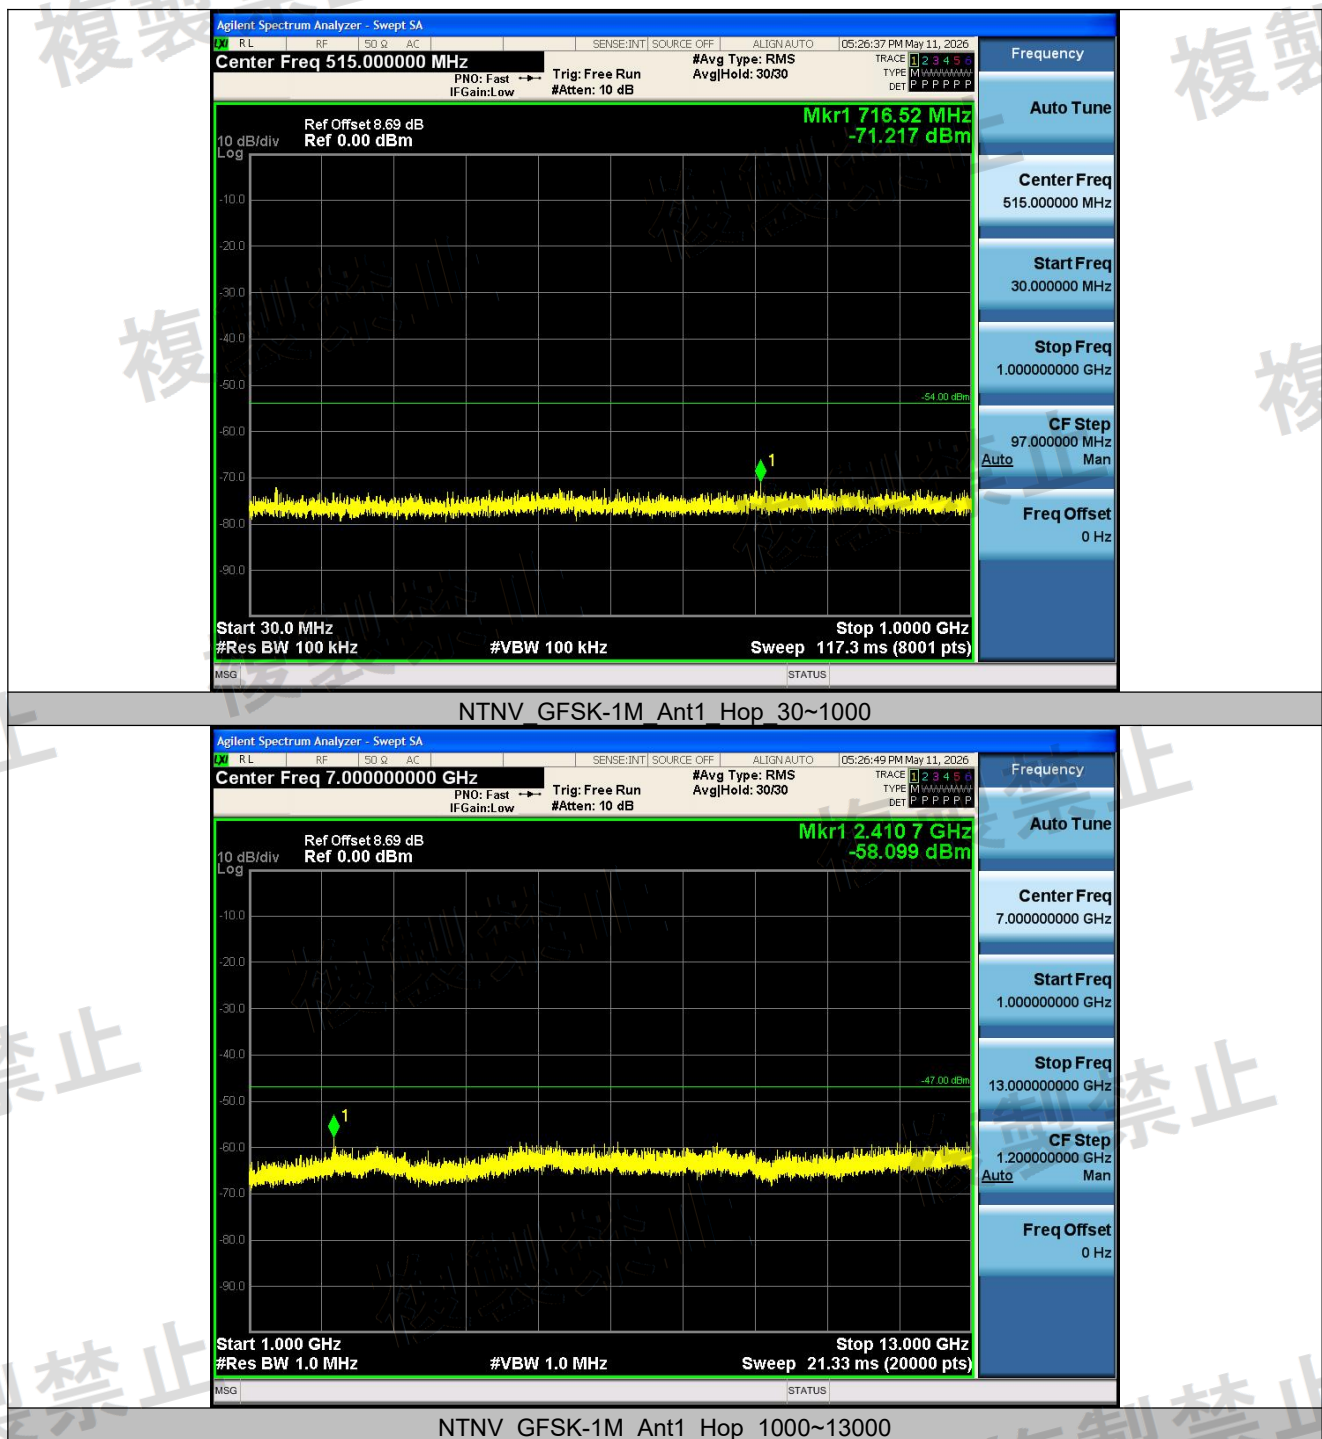


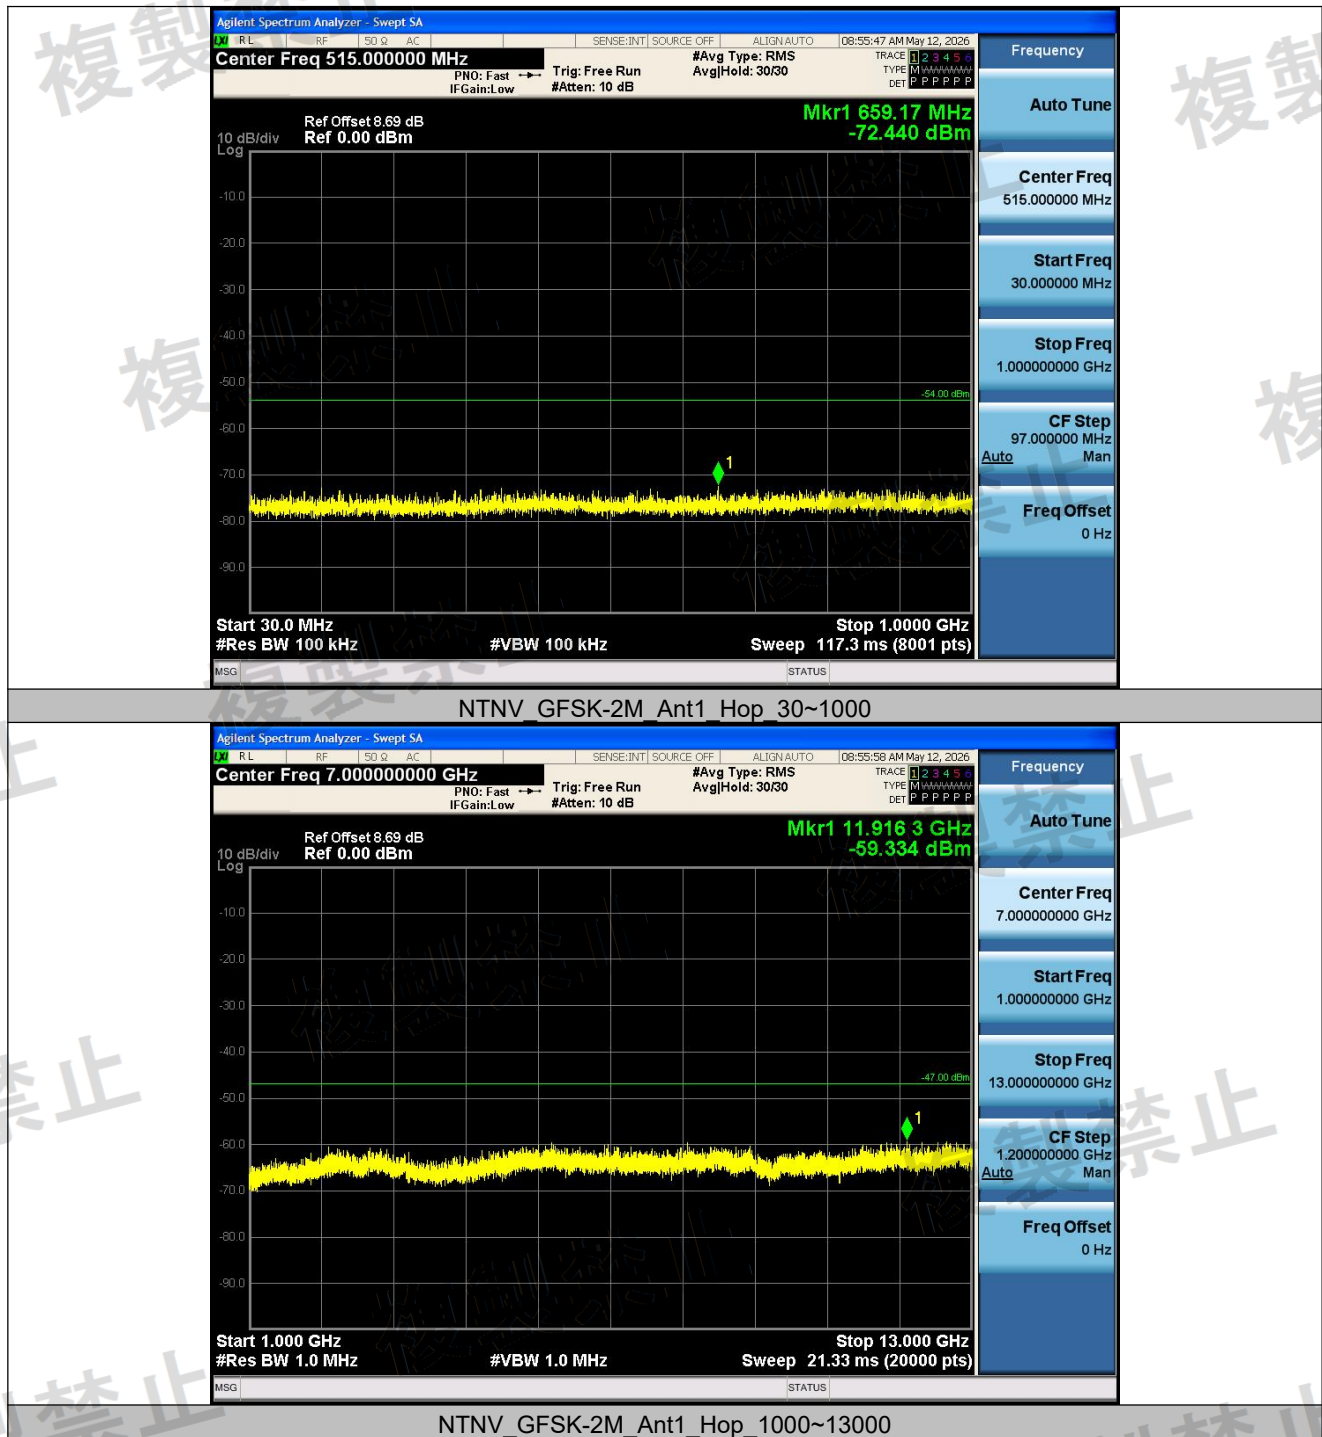

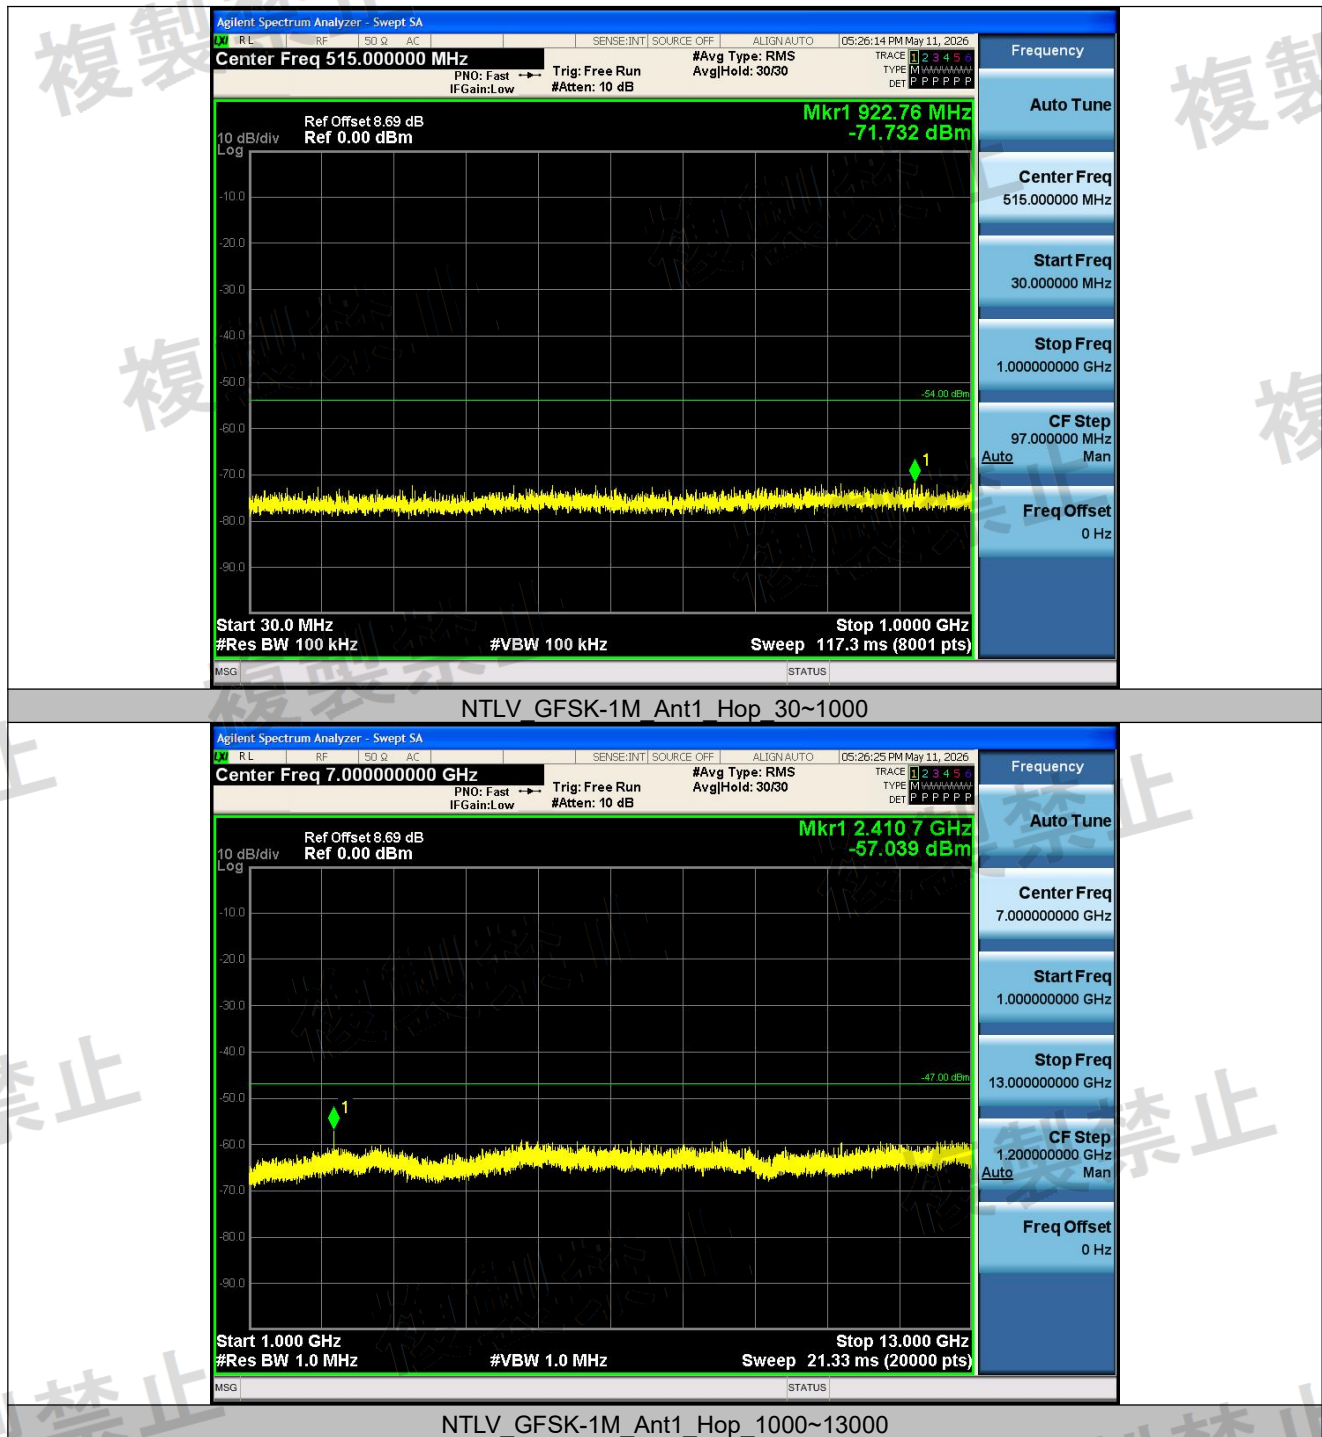

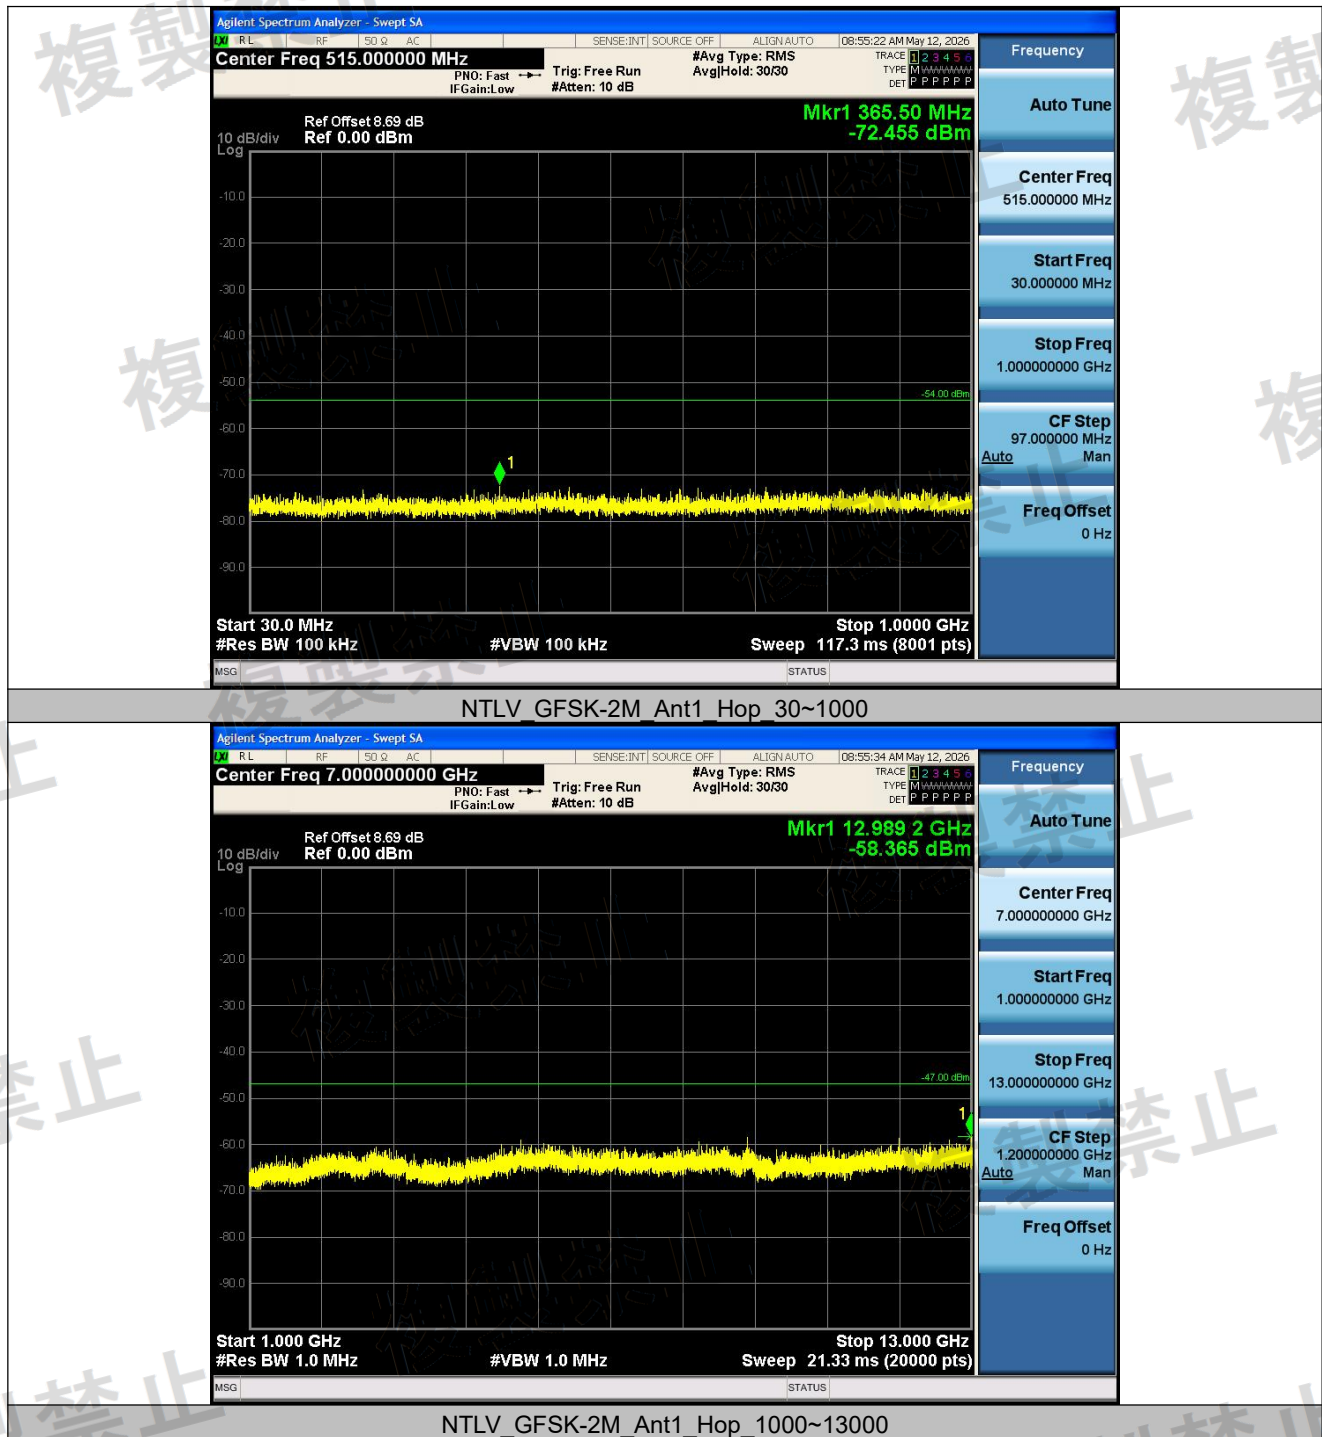

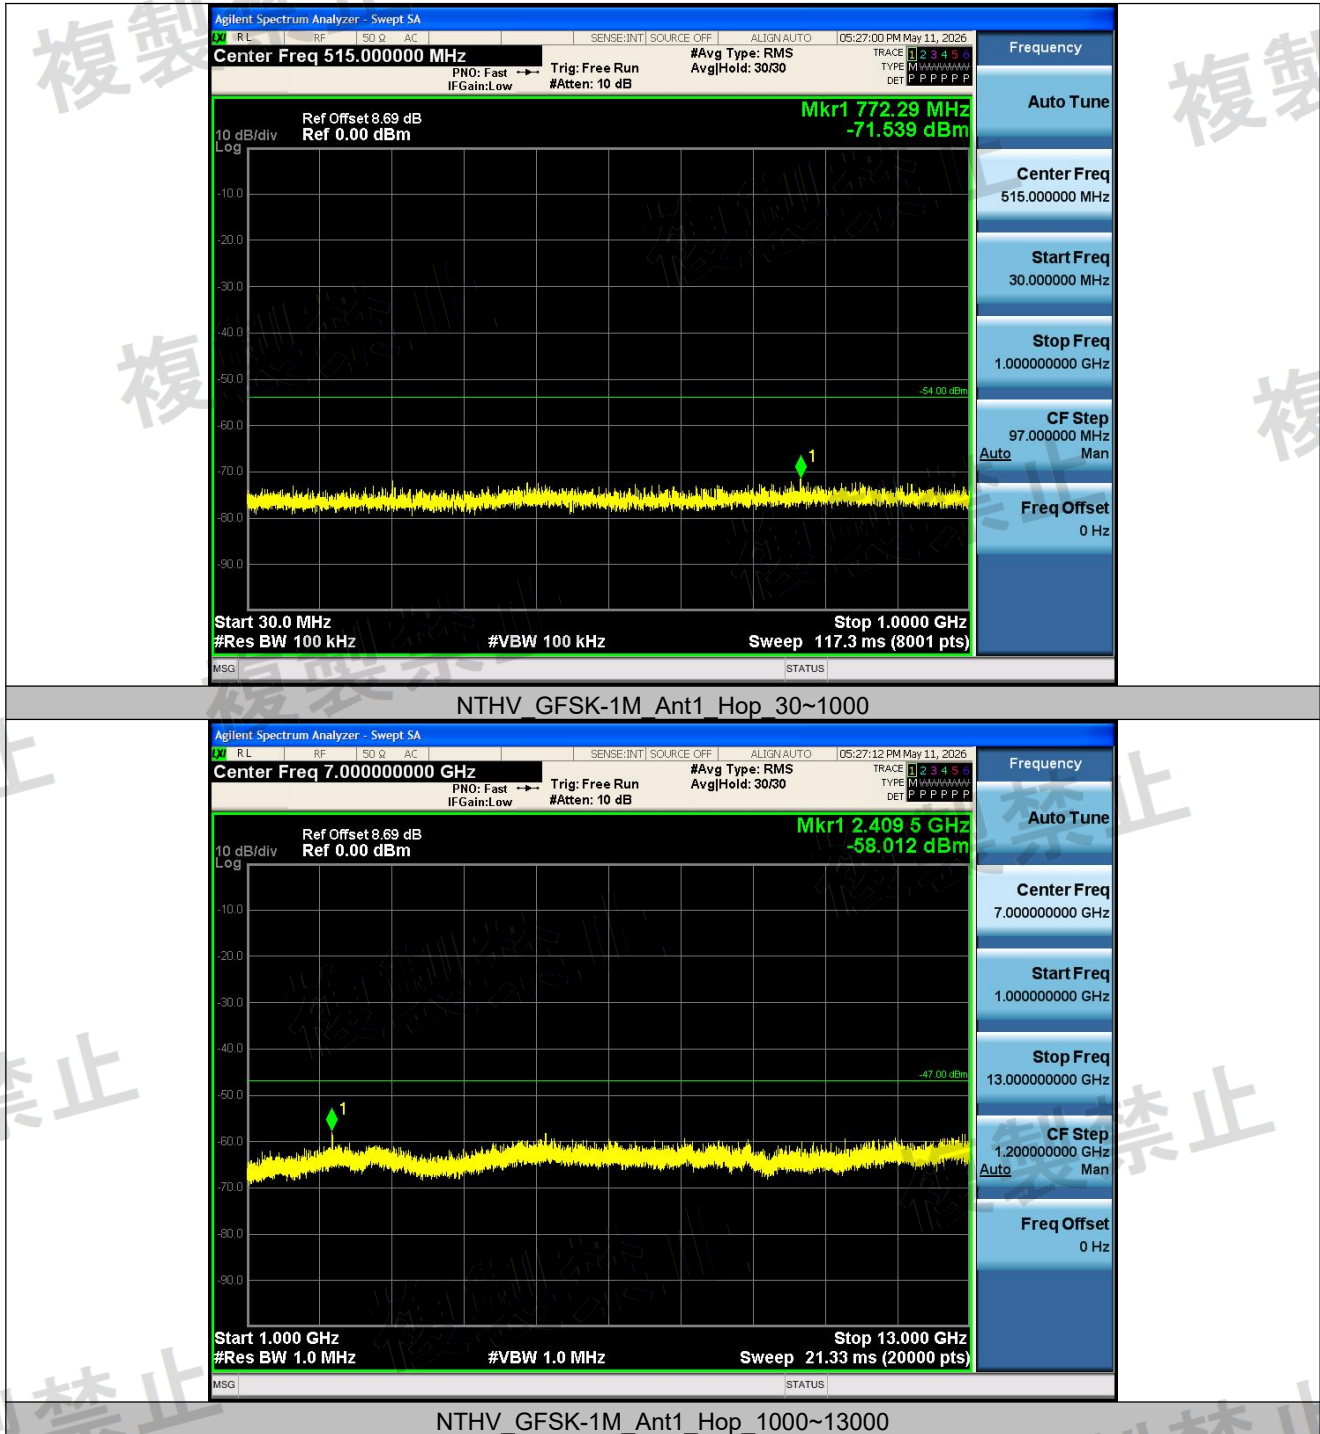

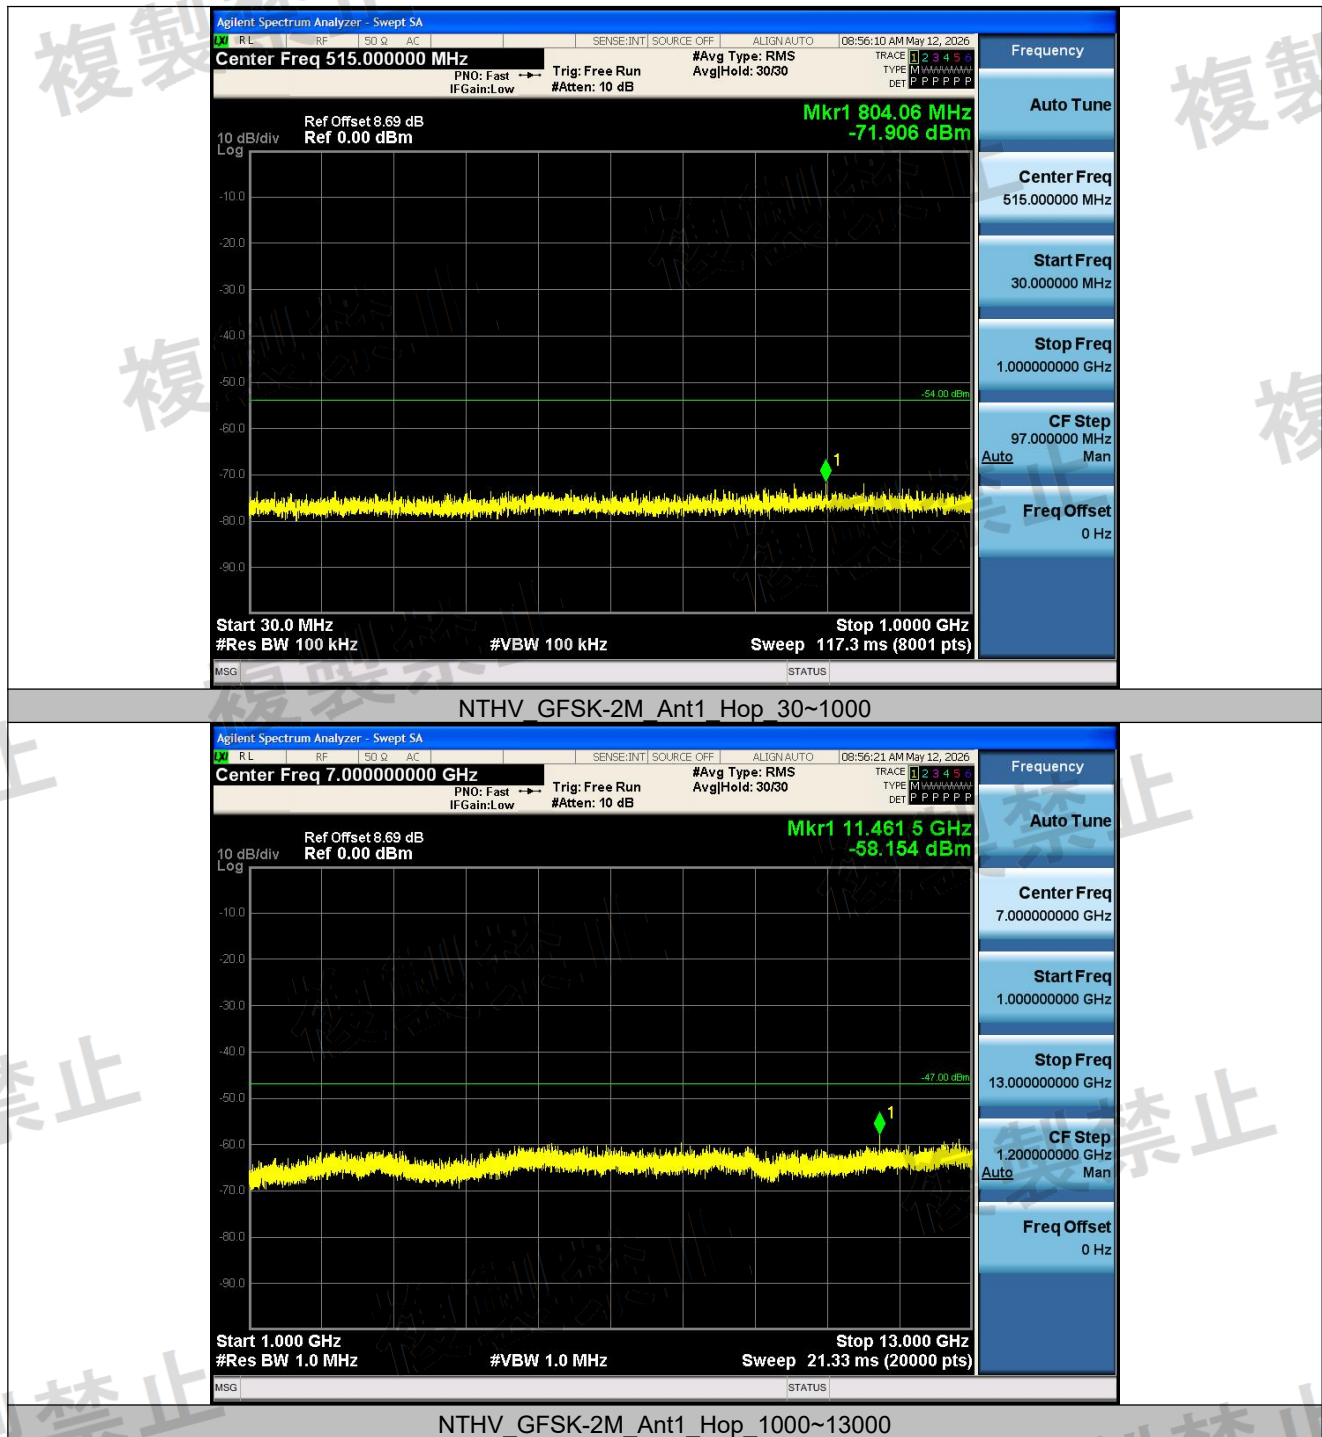

3.7 Dwell time of frequency hopping

3.7.1 Limits of dwell time

3.7.2 Limit of Receiver Spurious Radiation

The frequency retention time in the frequency hopping method shall be 0.4 second or less. The total sum of the frequency retention time in any frequency within the time obtained by multiplying the diffusion rate by 0.4 second shall be 0.4 second or shorter.

Formula:


(Normal mode) dwell time = [Spreading rate/40] x duty ratio x 0.4 seconds(BLE1M)

(Normal mode) dwell time = [Spreading rate/37] x duty ratio x 0.4 seconds(BLE2M)

(AFH mode) dwell time = [Spreading rate/20] x duty ratio x 0.4 seconds(BLE1M)

(AFH mode) dwell time = [Spreading rate/21] x duty ratio x 0.4 seconds(BLE2M)

3.7.3 Test setup

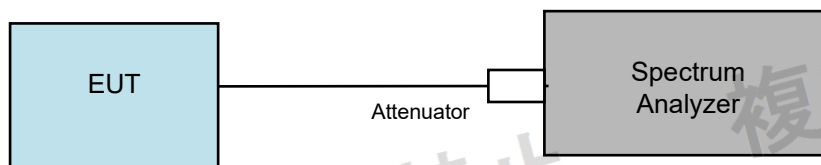

3.7.4 Deviation from test standard

No deviation.


3.7.5 Test results

Normal mode:


Test Condition	Test Mode	Antenna	Channel	BurstWidth [ms]	Period [ms]	Result [s]	Limit [s]	Verdict
NTNV	GFSK-1M	Ant1	2440	0.38	1.25	0.21	<0.4	PASS
	GFSK-2M	Ant1	2440	0.38	1.25	0.23	<0.4	PASS
NTLV	GFSK-1M	Ant1	2440	0.37	1.25	0.22	<0.4	PASS
	GFSK-2M	Ant1	2440	0.38	1.25	0.23	<0.4	PASS
NTHV	GFSK-1M	Ant1	2440	0.37	1.25	0.22	<0.4	PASS
	GFSK-2M	Ant1	2440	0.38	1.25	0.23	<0.4	PASS

AFH mode:

Test Condition	Test Mode	Antenna	Channel	BurstWidth [ms]	Period [ms]	Result [s]	Limit [s]	Verdict
NTNV	GFSK-1M	Ant1	2440	0.38	1.25	0.22	<0.4	PASS
	GFSK-2M	Ant1	2440	0.38	1.25	0.23	<0.4	PASS
NTLV	GFSK-1M	Ant1	2440	0.37	1.25	0.22	<0.4	PASS
	GFSK-2M	Ant1	2440	0.38	1.25	0.23	<0.4	PASS
NTHV	GFSK-1M	Ant1	2440	0.37	1.25	0.22	<0.4	PASS
	GFSK-2M	Ant1	2440	0.38	1.25	0.23	<0.4	PASS

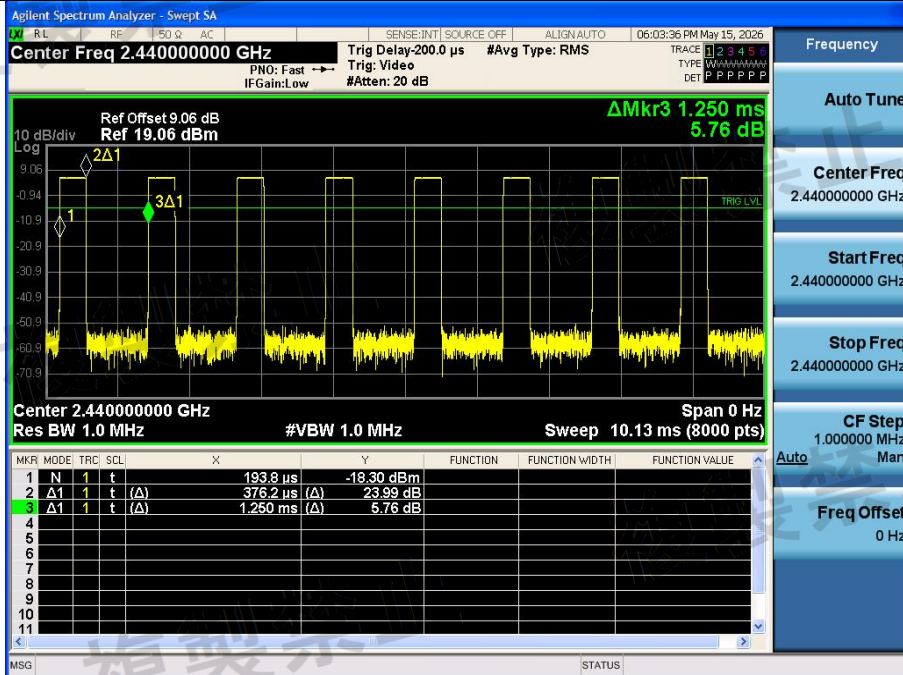

NTNV_GFSK-1M_Ant1_2440

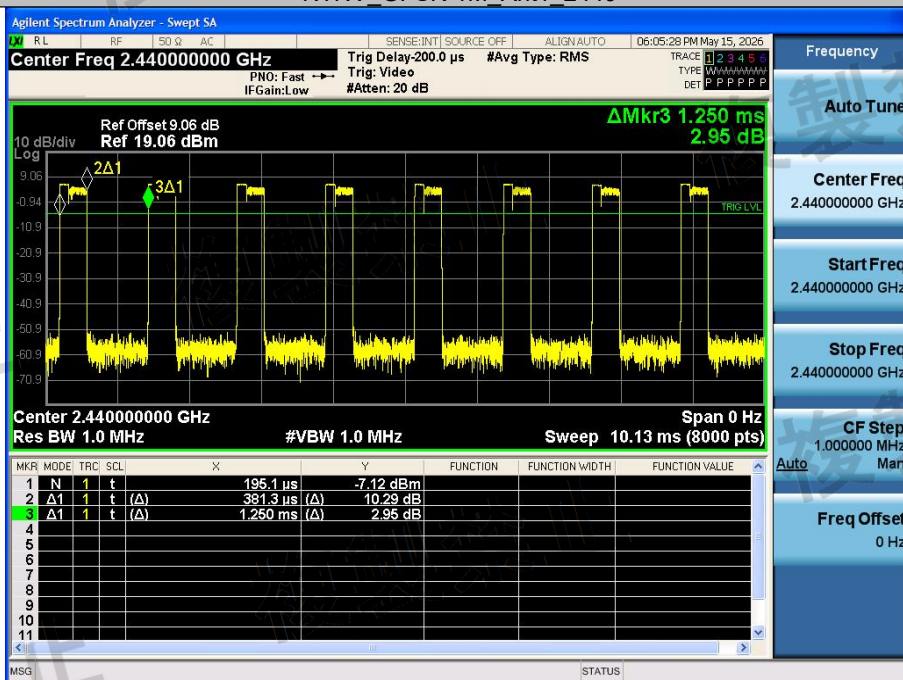

NTNV_GFSK-2M_Ant1_2440

Lab: [Hwa-Hsing \(Dongguan\) Testing Co., Ltd.](#)

Address: [No.101, Building N1, Yuyuan 2 Road, Yuyuan Industrial Park, HuangJiang Town, Dongguan City, People's Republic of China](#)


Tel: [0769-85598986](#)


Web.: [www.lyns-tci.com](#)

E-Mail: [service-hs@lyns-tci.com](#)

Release

[Ver. 1.5](#)

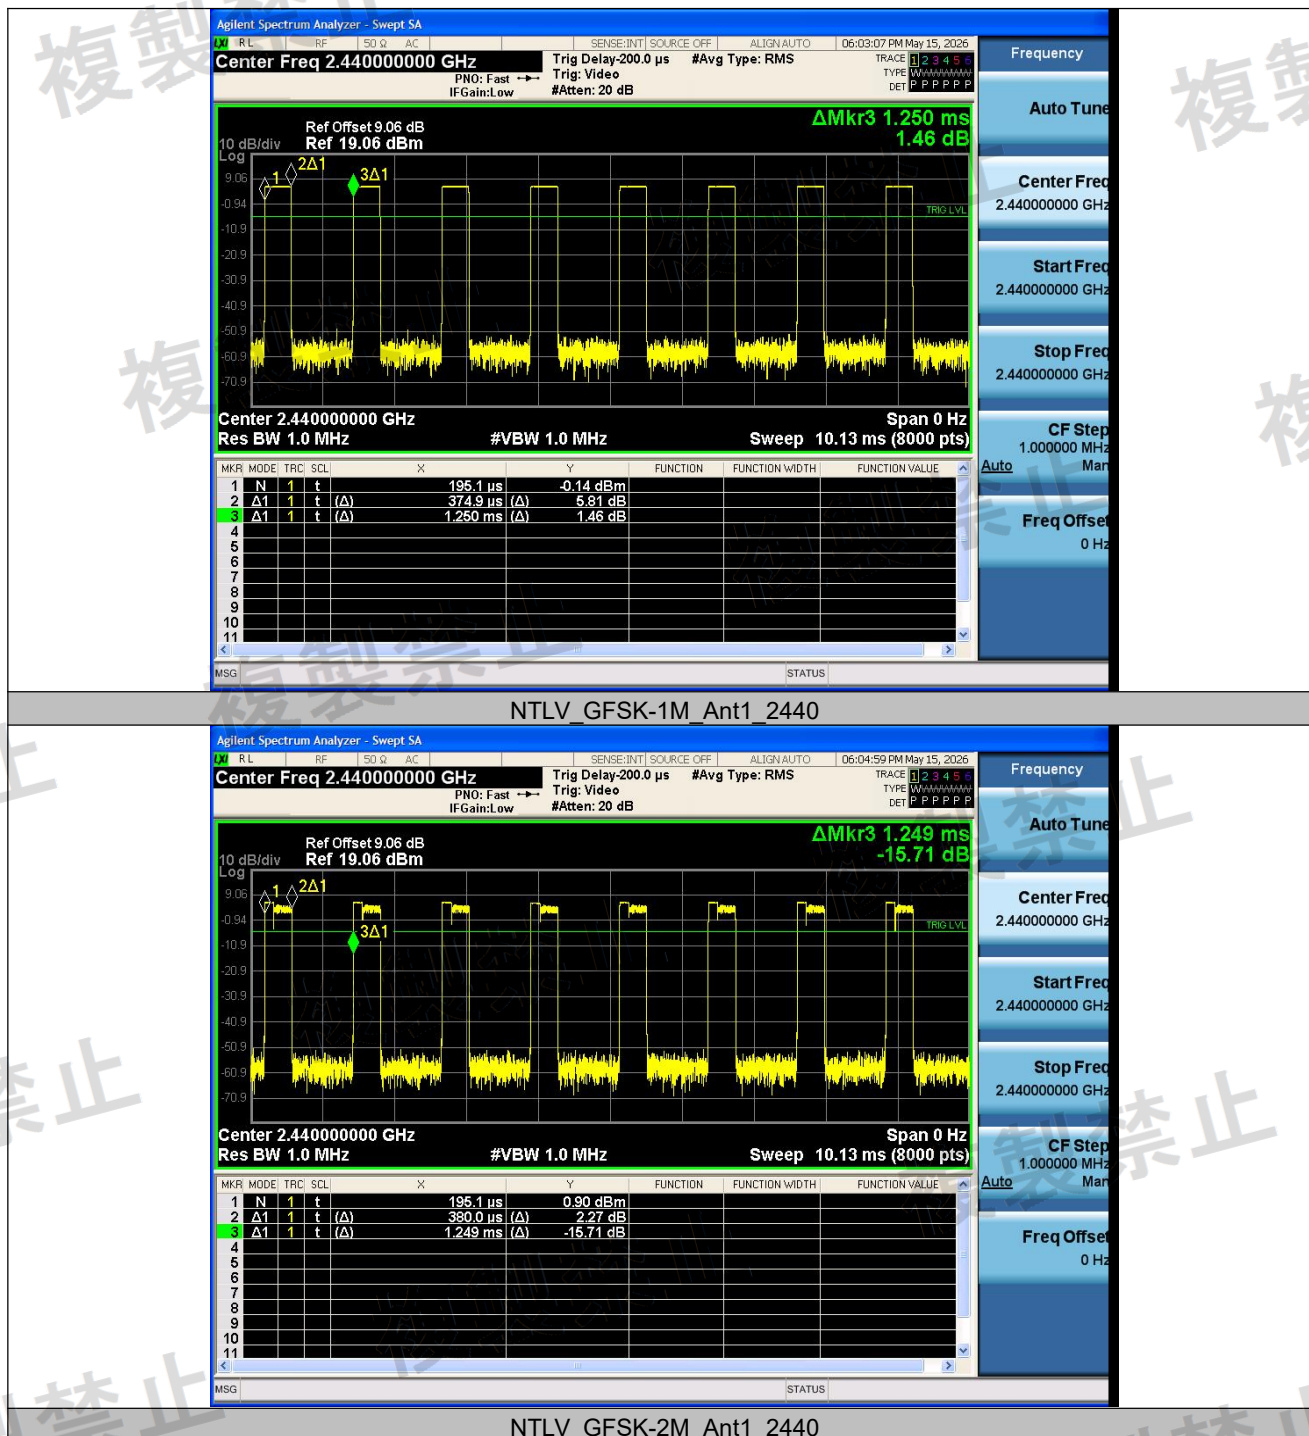

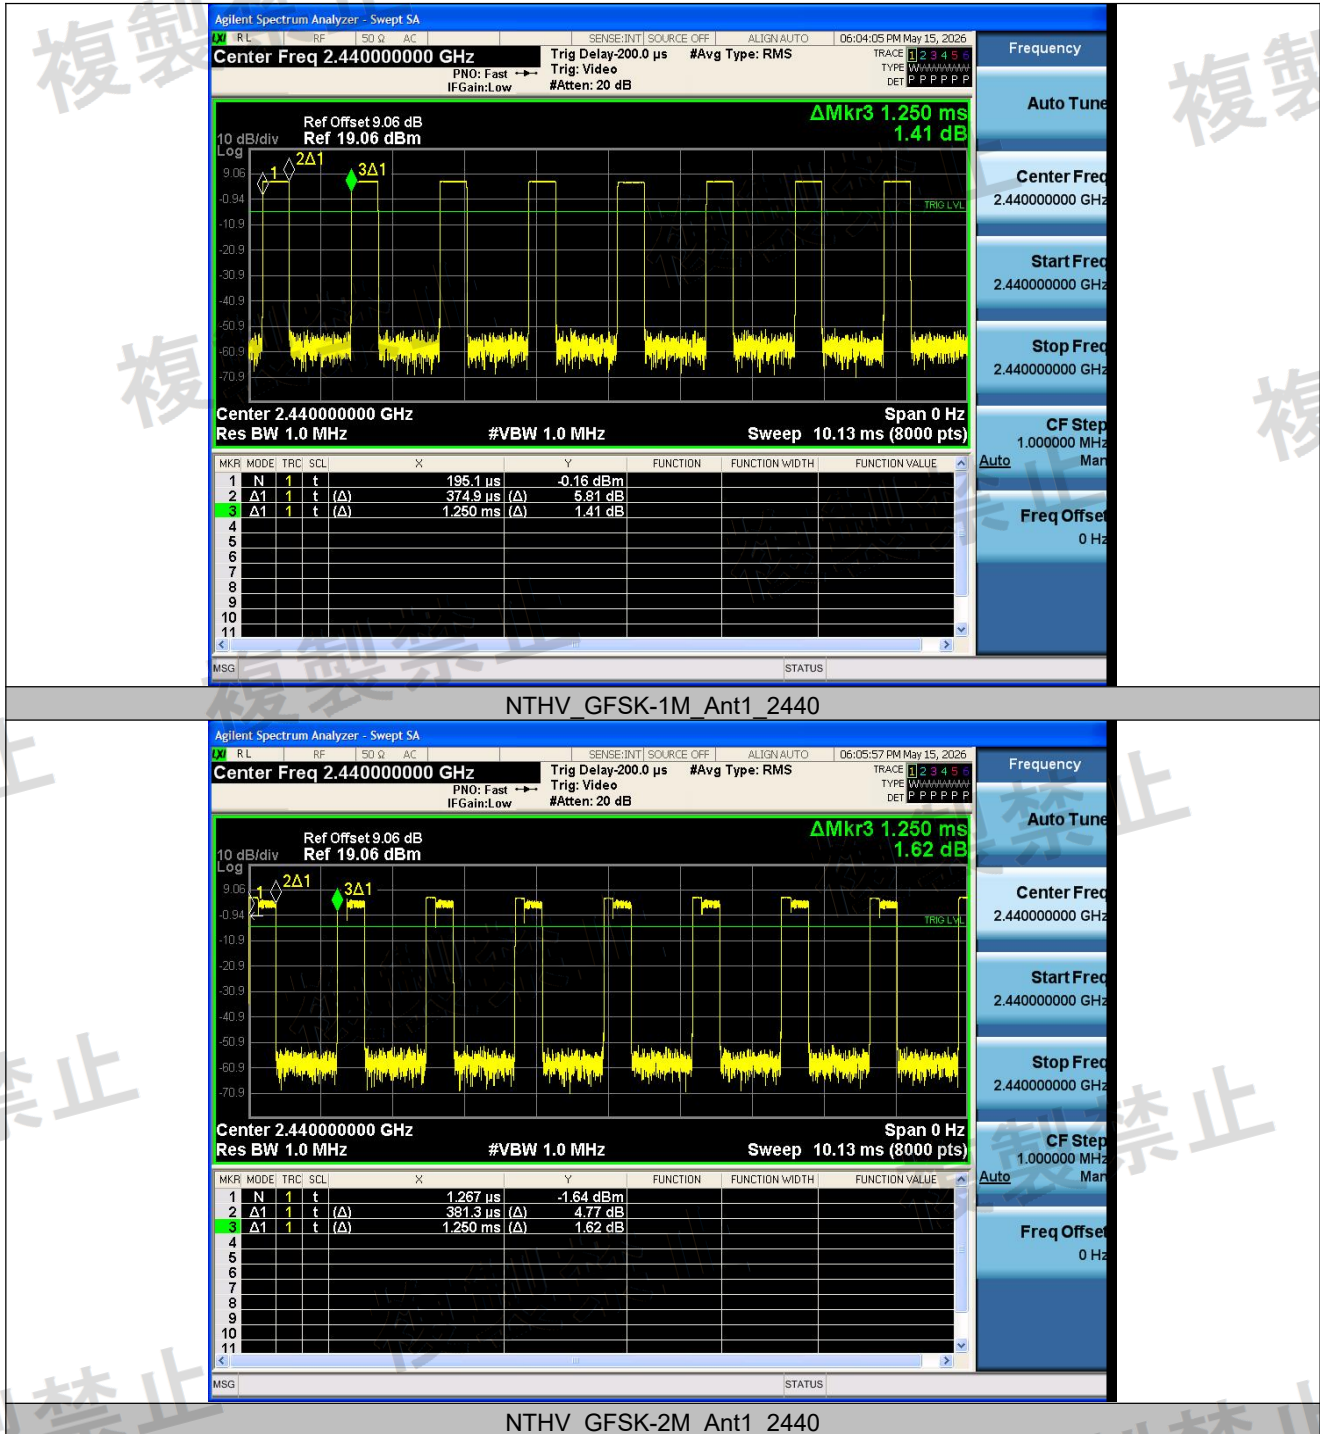

3.8 Interference prevention function

3.8.1 Limits of interference prevention function

No limit for use.

3.8.2 Test Procedure

The interference prevention requirement is a requirement that client devices should send an identification code to the master device in order to identify itself as a valid/authorized client.


An acceptable result is to take a screenshot to demonstrate that the MAC address is 48 bits,

The intent of this requirement is that client devices which do not have a valid identification code cannot connect to the master device (such unauthorized client devices therefore cannot “interfere” with authorized client devices because unauthorized client devices will not be allowed to connect to the master).

This requirement applies to all 2.4 GHz devices (in fact, this requirement applies to most transmitters/transceivers when they are intended to be used in Japan). For 2.4 GHz devices, the identification code must consist of 48 bits. The majority of 2.4 GHz devices are still WLAN, Bluetooth or ZigBee devices. In such cases, one of the IEEE 802.xx protocols will be used. As it happens (and this is probably not a coincidence) the MAC address which is assigned to such devices consists of 48 bits.

As a result of said changes in the Japanese Radio Law, the test laboratory (now) needs to verify the operation/existence of the interference prevention function and needs to report the result(s) of this test in the test report.



3.8.3 Test Setup

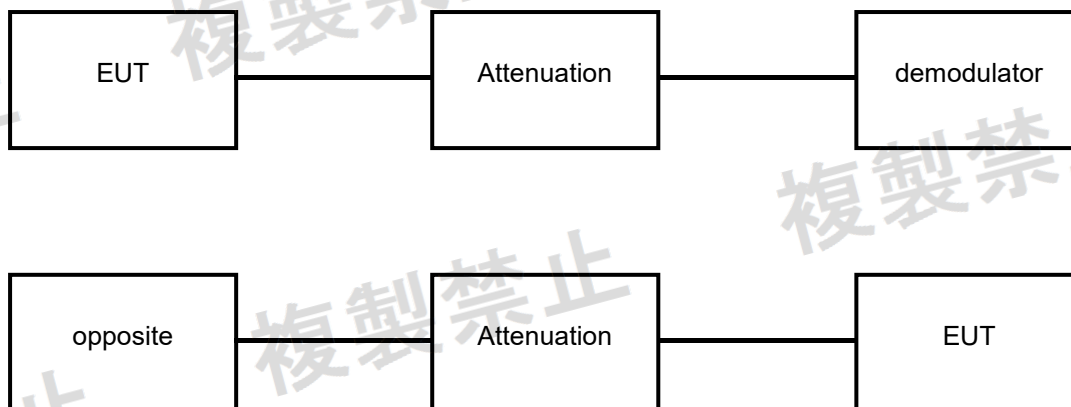

3.8.4 Test results

Link mode	Test result
GFSK	Good
The MAC Address	42 A7 94 64 4A 71
42 A7 94 64 4A 71	

4 Photographs of the test configuration

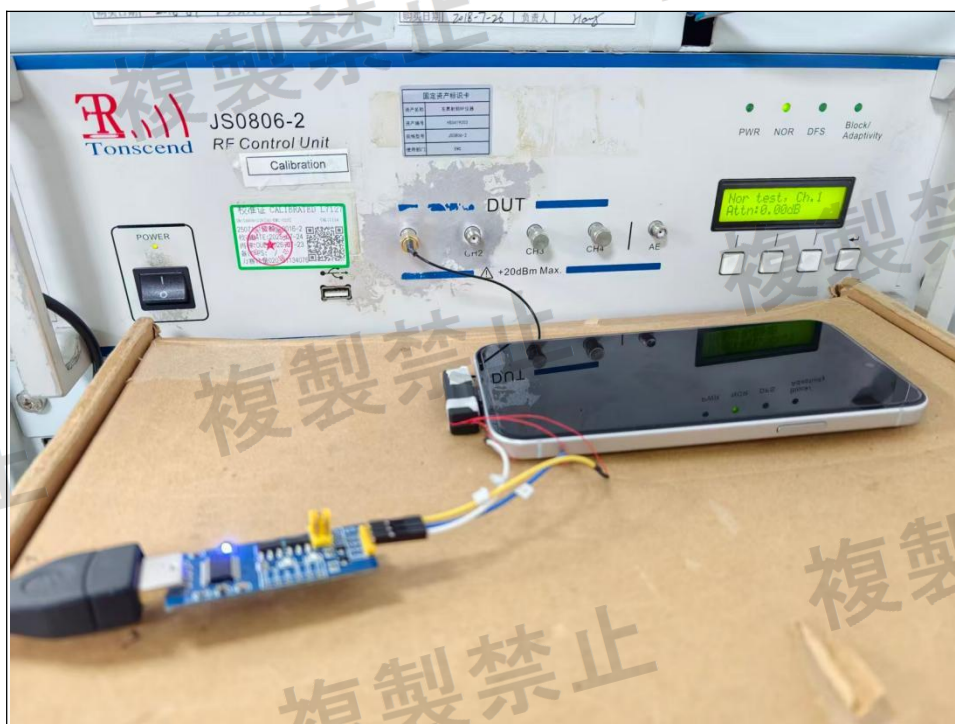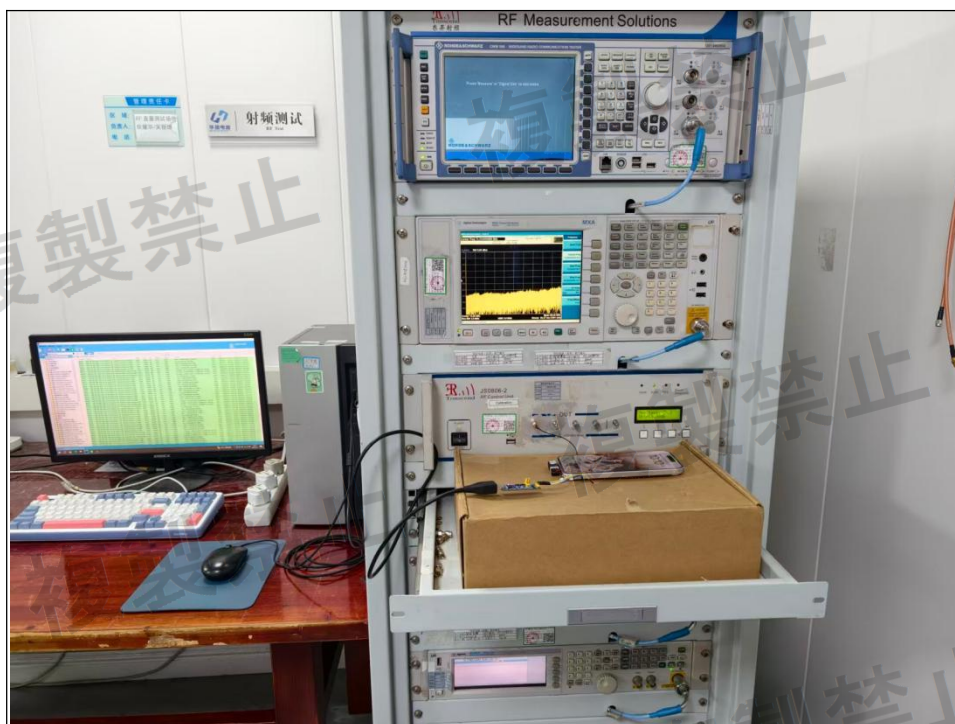

Appendix – Information on the Testing Laboratories

We, [Hwa-Hsing \(Dongguan\) Testing Co., Ltd.](#), A global provider of TESTING and CERTIFICATION services for consumer products, electronic products and wireless information technology products. Adhering to the core values “HONEST and TRUSTWORTHY, OBJECTIVE and IMPARTIALITY, RIGOROUS and AFFICIENT”, commitment to provide professional, perfect and efficient comprehensive ONE-STOP solution of TESTING and CERTIFICATION services for Manufacturers, Buyers, Traders, Brands, Retailers. Assist client to better manage risk, protect their brands, reduce costs and cut time to over 150 markets in global. Our laboratories are FCC recognized accredited test firms and accredited and approved according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Lab Address: [No.101, Building N1, Yuyuan 2 Road, Yuyuan Industrial Park, HuangJiang Town, Dongguan City, People's Republic of China](#)

Contact Tel: [0769-85598986](#)

Email: service-hs@lyns-tci.com

Web Site: www.lyns-tci.com

The address and road map of all our labs can be found in our web site also.

--- END ---