




Chain0 : 6dB Bandwidth @ 802.11n(HT40) Mode Ch 3

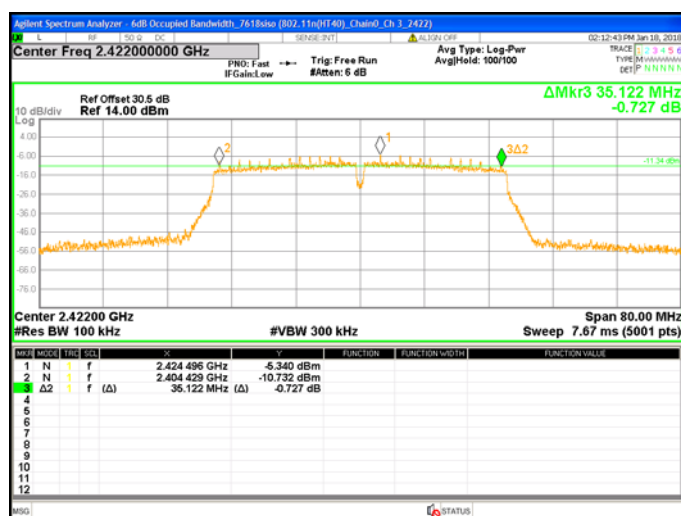


Chain0 : 6dB Bandwidth @ 802.11n(HT40) Mode Ch 6

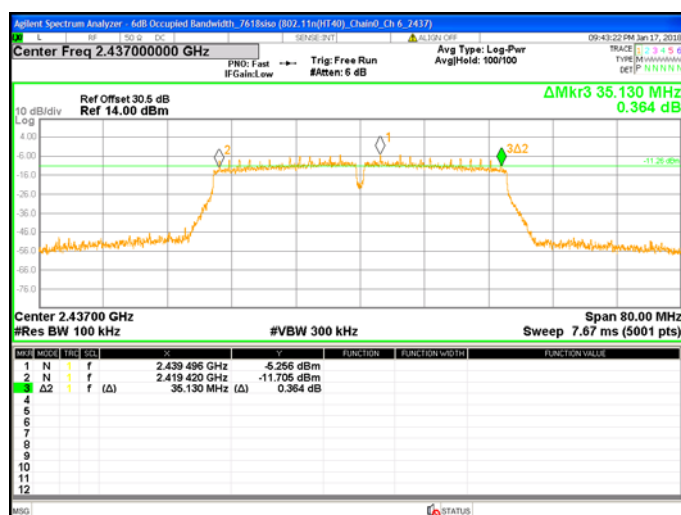


Chain0 : 6dB Bandwidth @ 802.11n(HT40) Mode Ch 9

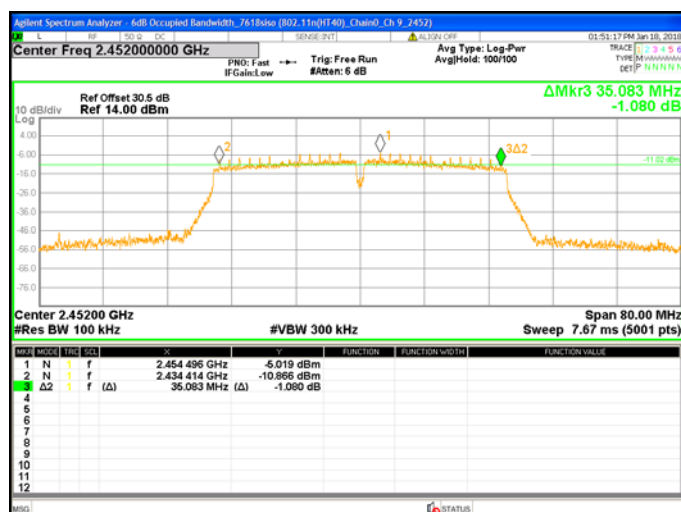

Chain1 : 6dB Bandwidth @ 802.11n(HT40) Mode Ch 3

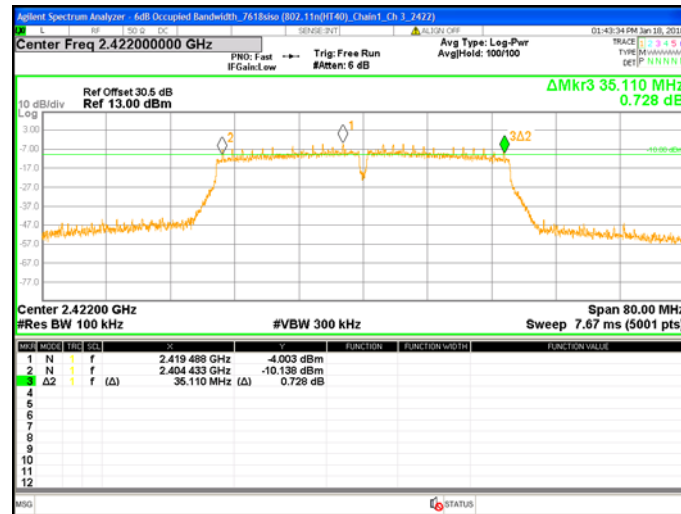

Chain1 : 6dB Bandwidth @ 802.11n(HT40) Mode Ch 6

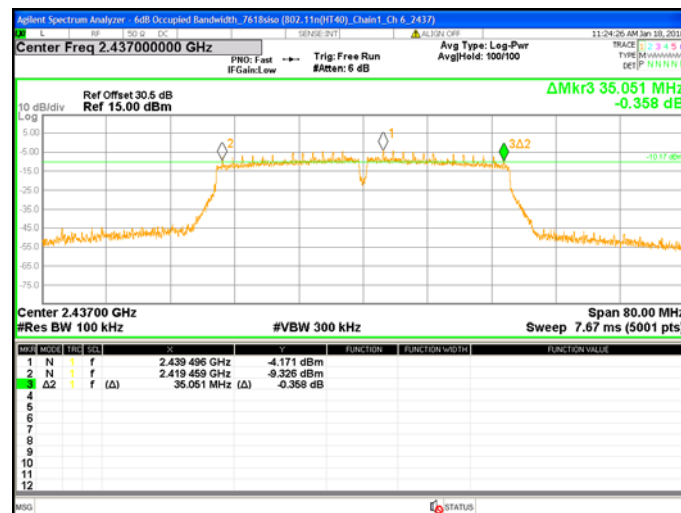


Chain1 : 6dB Bandwidth @ 802.11n(HT40) Mode Ch 9



MIMO

Chain0 : 6dB Bandwidth @ 802.11n(HT20) Mode Ch 1

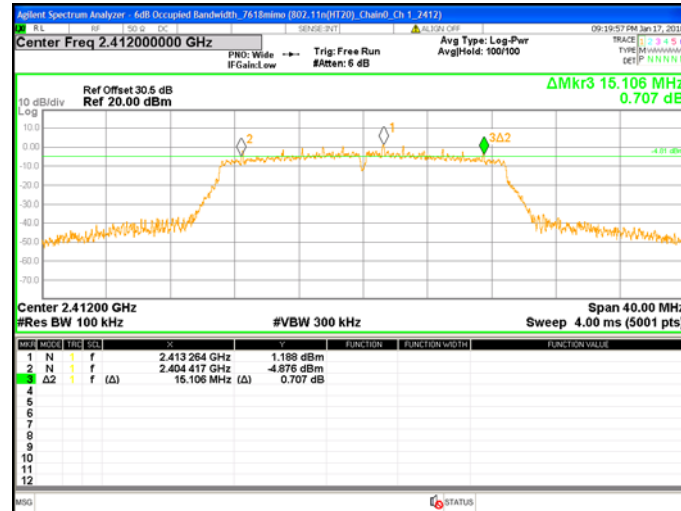


Chain0 : 6dB Bandwidth @ 802.11n(HT20) Mode Ch 6




Chain0 : 6dB Bandwidth @ 802.11n(HT20) Mode Ch11




Chain1 : 6dB Bandwidth @ 802.11n(HT20) Mode Ch 1

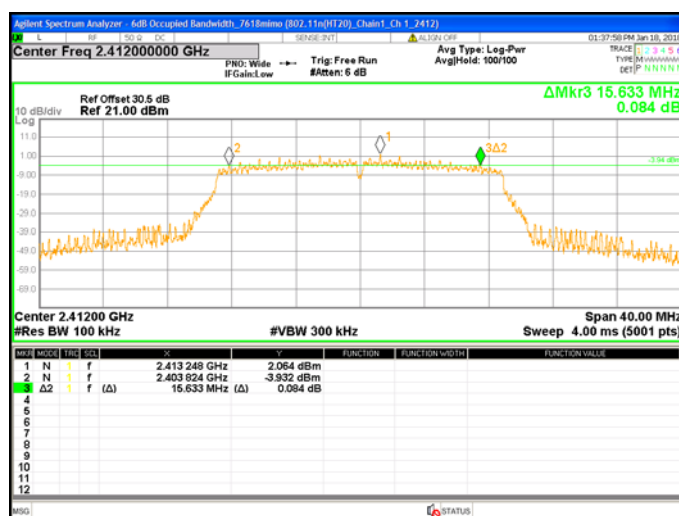


Chain1 : 6dB Bandwidth @ 802.11n(HT20) Mode Ch 6

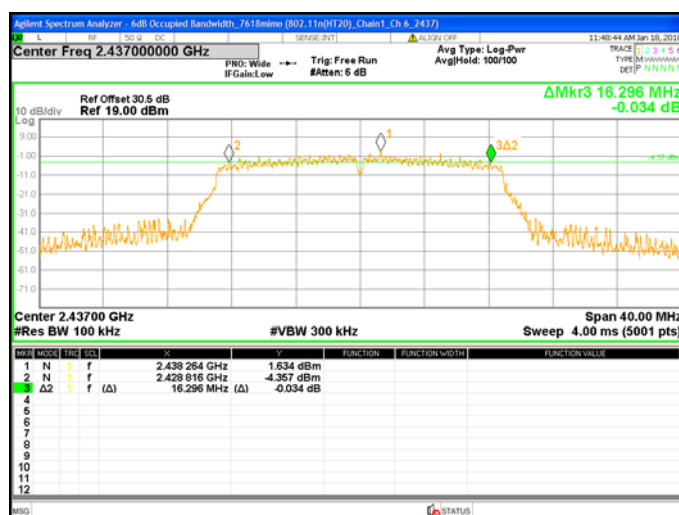


Chain1 : 6dB Bandwidth @ 802.11n(HT20) Mode Ch11

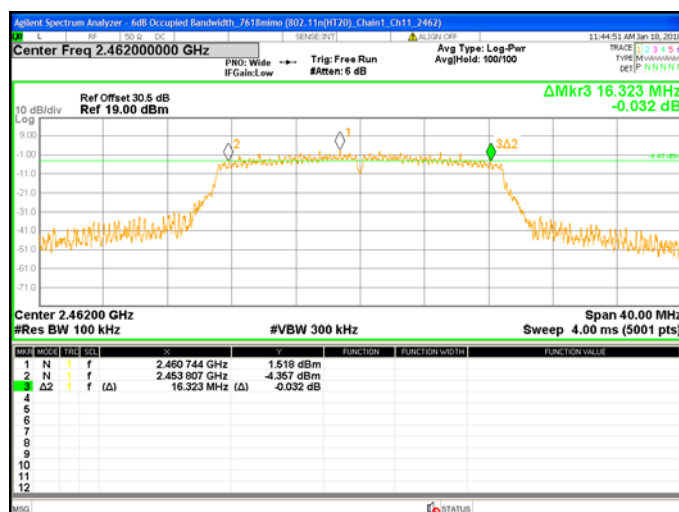


Chain0 : 6dB Bandwidth @ 802.11n(HT40) Mode Ch 3

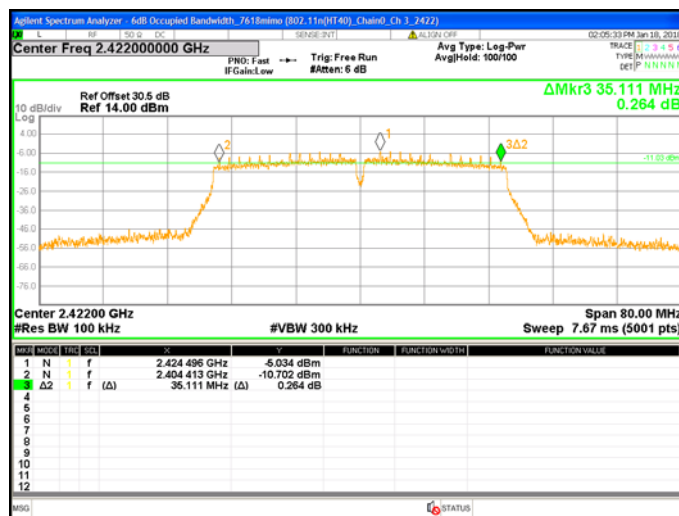


Chain0 : 6dB Bandwidth @ 802.11n(HT40) Mode Ch 6

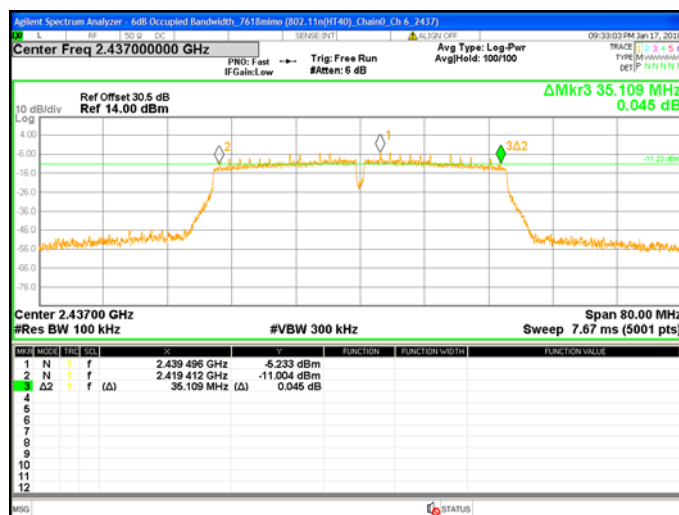


Chain0 : 6dB Bandwidth @ 802.11n(HT40) Mode Ch 9

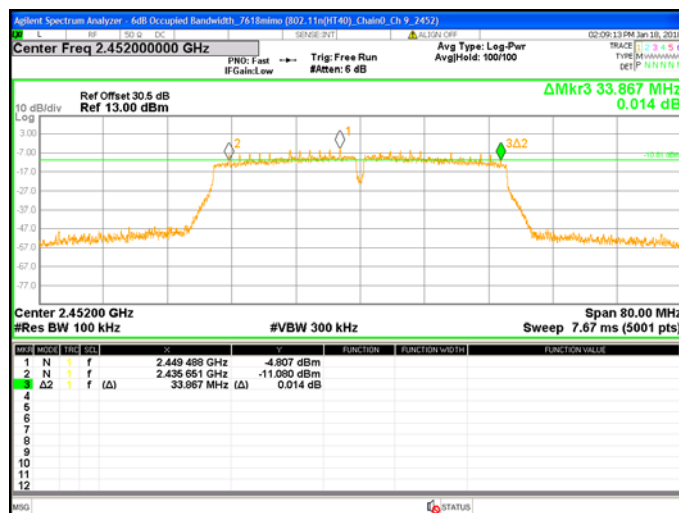


Chain1 : 6dB Bandwidth @ 802.11n(HT40) Mode Ch 3

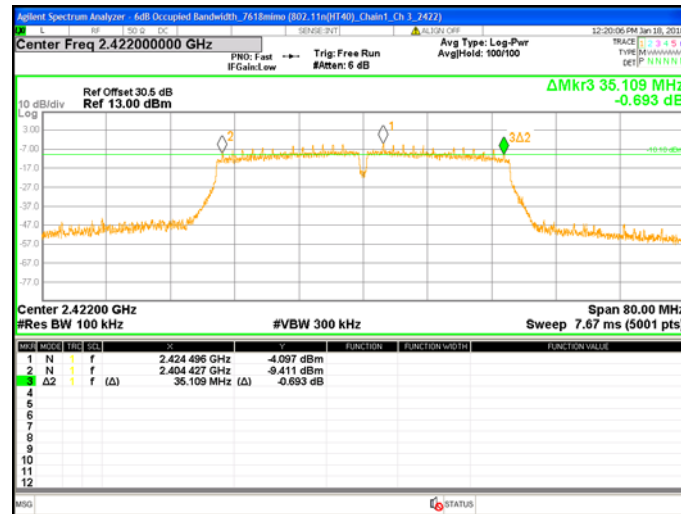

Chain1 : 6dB Bandwidth @ 802.11n(HT40) Mode Ch 6

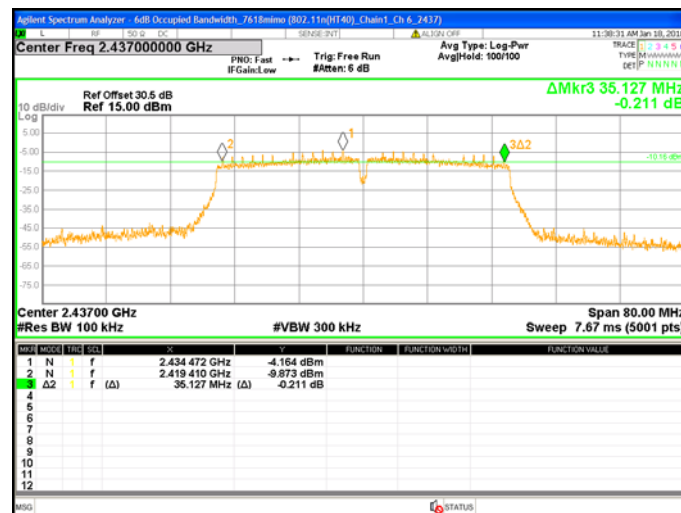

Chain1 : 6dB Bandwidth @ 802.11n(HT40) Mode Ch 9

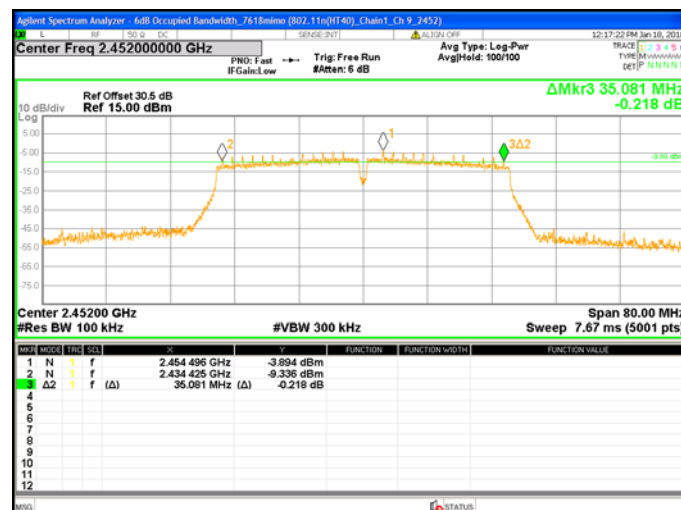

5. 峰值輸出功率


5.1 適用規範

依據國家通訊傳播委員會低功率射頻電機技術規範 3.10.1.2(1)(C)節之規定，對使用數位調變技術之低功率發射機，其峰值輸出功率不得大於 1 Watt。

5.2 測試方法

此為 RF 傳導測試，將發射機之天線埠經由適當之衰減直接連接至測試儀器。

5.3 測試配置圖

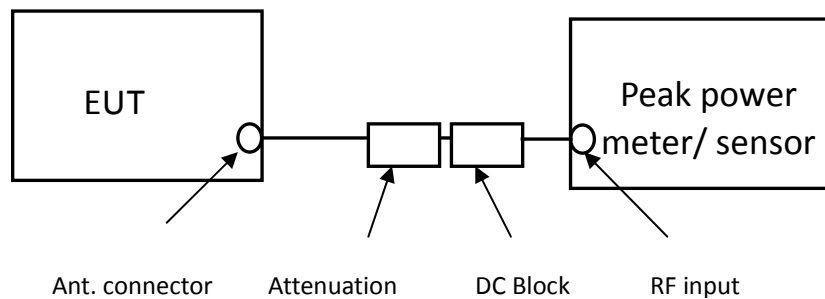

5.4 測試結果

溫度 : 25 °C
相對濕度 : 50 %
大氣壓力 : 1008 hPa
測 試 日 期 : 2018/1/23

**Single Tx
Chain 0**

Mode	Channel	Frequency (MHz)	Output Power (AV) (dBm)	Total Power (AV) (mW)	Maximum power (PK) (dBm)	Maximum power (PK) (mW)	Limit (dBm)	Margin (dB)
802.11b	1	2412	13.21	20.94	16.01	39.90	30	-13.99
	6	2437	13.54	22.59	15.96	39.45	30	-14.04
	11	2462	13.61	22.96	15.67	36.90	30	-14.33
802.11g	1	2412	14.49	28.12	22.05	160.32	30	-7.95
	6	2437	14.74	29.79	22.3	169.82	30	-7.70
	11	2462	14.75	29.85	22.56	180.30	30	-7.44
802.11n(HT20)	1	2412	11.83	15.24	20.05	101.16	30	-9.95
	6	2437	11.85	15.31	19.94	98.63	30	-10.06
	11	2462	12.1	16.22	20.14	103.28	30	-9.86
802.11n(HT40)	3	2422	8.37	6.87	16.13	41.02	30	-13.87
	6	2437	8.4	6.92	16.63	46.03	30	-13.37
	9	2452	8.58	7.21	16.97	49.77	30	-13.03

Chain 1

Mode	Channel	Frequency (MHz)	Output Power (AV) (dBm)	Total Power (AV) (mW)	Maximum power (PK) (dBm)	Maximum power (PK) (mW)	Limit (dBm)	Margin (dB)
802.11b	1	2412	14.11	25.76	16.43	43.95	30	-13.57
	6	2437	14.21	26.36	16.55	45.19	30	-13.45
	11	2462	14.22	26.42	16.57	45.39	30	-13.43
802.11g	1	2412	15.14	32.66	22.65	184.08	30	-7.35
	6	2437	15.14	32.66	22.78	189.67	30	-7.22
	11	2462	15.35	34.28	22.91	195.43	30	-7.09
802.11n(HT20)	1	2412	12.33	17.10	20.89	122.74	30	-9.11
	6	2437	12.52	17.86	20.97	125.03	30	-9.03
	11	2462	12.34	17.14	20.91	123.31	30	-9.09
802.11n(HT40)	3	2422	9.46	8.83	17.07	50.93	30	-12.93
	6	2437	9.65	9.23	17.01	50.23	30	-12.99
	9	2452	9.42	8.75	17.03	50.47	30	-12.97

MIMO

Mode	Channel	Frequency (MHz)	Output Power (dBm)				Output Power (mW)				Total Power (dBm)				Limit (dBm)	Margin (dB)
			Chian 0		Chain 1		Chain 0		Chian 1		AV		PK			
			AV	PK	AV	PK	AV	PK	AV	PK	0+1 (mW)	0+1 (dBm)	0+1 (mW)	0+1 (dBm)		
802.11n (HT20)	1	2412	11.75	20.17	12.62	21.04	14.96	103.99	18.28	127.06	33.24	15.22	231.05	23.64	30	-6.36
	6	2437	11.98	20.11	12.77	20.74	15.78	102.57	18.92	118.58	34.70	15.40	221.14	23.45	30	-6.55
	11	2462	12.07	20.14	12.67	21.05	16.11	103.28	18.49	127.35	34.60	15.39	230.63	23.63	30	-6.37

Mode	Channel	Frequency (MHz)	Output Power (dBm)				Output Power (mW)				Total Power (dBm)				Limit (dBm)	Margin (dB)
			Chian 0		Chain 1		Chain 0		Chian 1		AV		PK			
			AV	PK	AV	PK	AV	PK	AV	PK	0+1(mW)	0+1(dBm)	0+1(mW)	0+1(dBm)		
802.11n (HT40)	3	2422	8.57	16.32	9.46	17.73	7.19	42.85	8.83	59.29	16.03	12.05	102.15	20.09	30	-9.91
	6	2437	9.47	16.11	9.65	17.54	8.85	40.83	9.23	56.75	18.08	12.57	97.59	19.89	30	-10.11
	9	2452	8.61	16.54	9.42	17.65	7.26	45.08	8.75	58.21	16.01	12.04	103.29	20.14	30	-9.86

以上測試結果符合規範。

6. 輻射場強干擾測試

6.1 適用規範

依據國家通訊傳播委員會低功率射頻電機技術規範之 3.10.1.5 節之要求，落於

2.7 節禁用頻帶之輻射發射，應符合 2.8 節之規定：

頻率 (MHz)	電場強度 (微伏/公尺)	測距 (公尺)
0.009-0.490 (含)	2,400/頻率(千赫)	300
0.490 (不含)-1.705 (含)	24,000/頻率(千赫)	30
1.705 (不含)-30 (不含)	30	30
30 (含)-88 (含)	100	3
88 (不含)-216 (含)	150	3
216 (不含)-960 (含)	200	3
Above 960	500	3

備註:

1. 在交界頻率處，以數值較小者為標準。
2. 測距是指待測物最靠近天線的點到天線的距離。

6.2 測試方法


如待測物須與週邊同時操作，則待測物須與週邊同時量測。在量測時，所有之連接線皆須擺設在最大的輻射場強下。待測物放在一個距離地面 0.8 公尺或 1.5 公尺、可 360°旋轉的旋轉木桌上，待測物距離天線 3 米，天線可在距離地面 1~4 米之間升降，利用天線升降和桌子旋轉，找出待測物最大輻射場強，天線水平和垂直極化都須測量。

輻射場強量測是在 3 公尺測試距離下執行，除非輻射場強之強度太低以致於無法在此一距離下量測。至於待測物之輻射場強強度低於儀器本身背景雜訊(Noise floor)之情況，則使用一放大器(Pre-amplifier)或將測試距離拉近，而後將所有之讀值反推至 3 米之量測值。


執行 30 MHz-1 GHz 的測試時使用 Bilog 天線，執行 1 GHz 以上的測試時則使用 Horn 天線，9kHz-30MHz 的測試使用 Loop 天線。

6.3 測試配置圖


For 30 MHz 以下

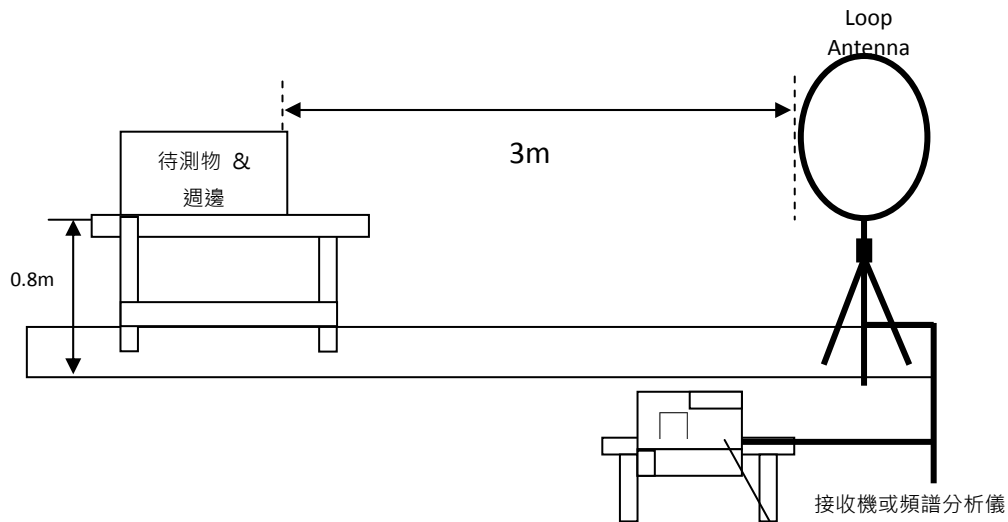

Radiated emission from 30MHz to 1GHz uses Bilog Antenna:

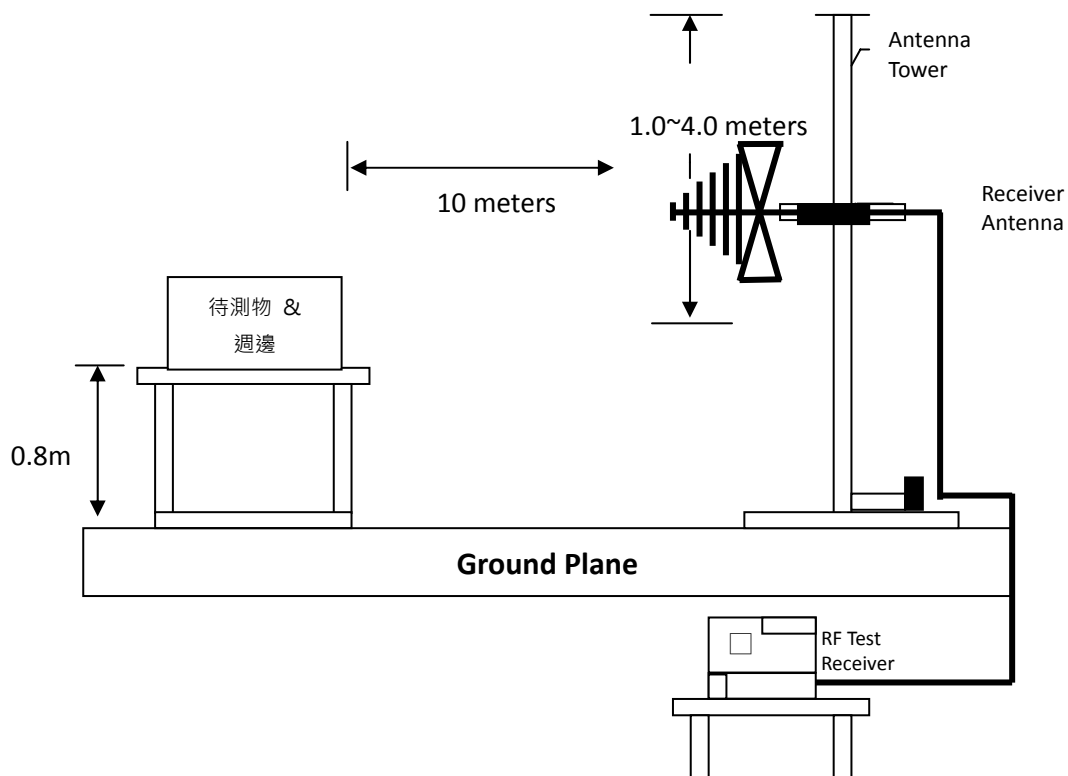

Radiated emission above 1GHz using Horn Antenna

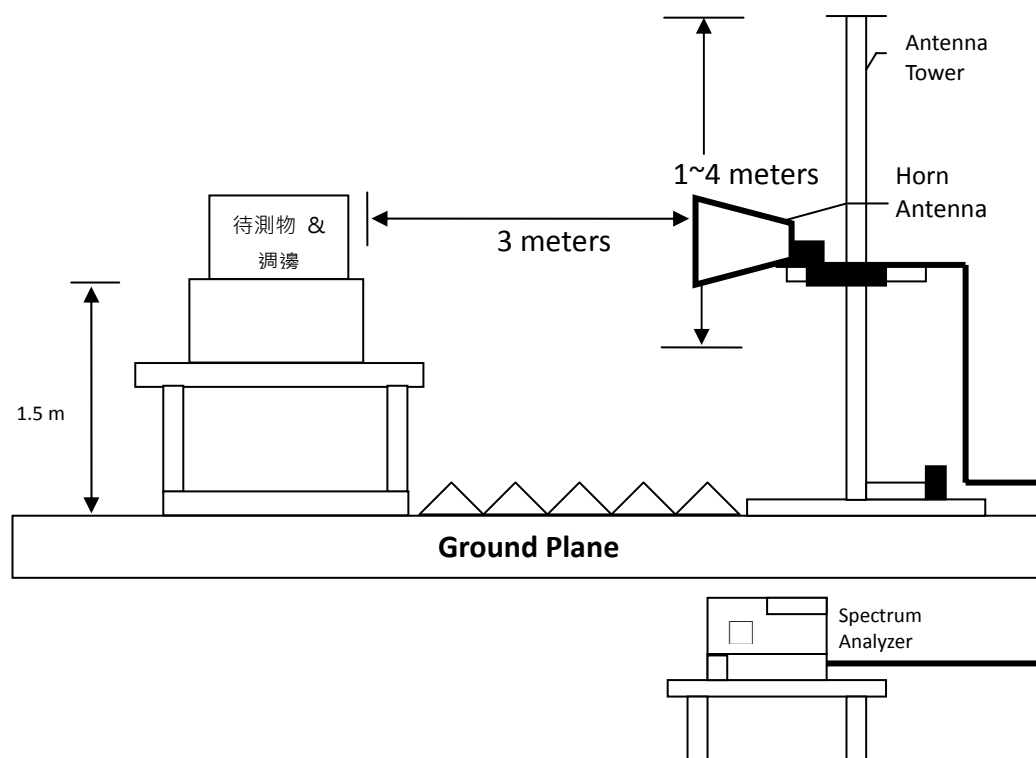

6.4 測試結果

6.4.1 頻率範圍低於 1 GHz

溫度 : 20 °C
 相對濕度 : 55 %
 大氣壓力 : 1008 hPa
 測試日期 : 2018/1/23

儀器設定

Detector	QP
RBW	9-150 kHz ; 200-300 Hz 0.15-30 MHz; 9-10 kHz 30-1000 MHz; 100-120 kHz
VBW	$\geq 3 \times \text{RBW}$

待測物分別在 802.11b/g/n 之測試模式下執行測試，經本實驗室證實，待測物在 802.11g mode Tx chain 0 channel 6 為 EMI 最差之模式，故將其最差之讀值記錄於報告中。

測試項目：混附發射

Worst case：802.11g mode Tx channel 6

Chain 0

頻率 (MHz)	檢測值	修正因子 (dB/m)	讀值 (dBμV)	實際值 (dBμV/m)	限制值 @ 3m (dBμV/m)	容差 (dB)
0.01	PK	20.25	40.70	60.95	127.60	-66.65
0.02	PK	20.30	38.42	58.72	121.58	-62.86
0.07	PK	19.56	39.46	59.02	110.70	-51.68
0.09	PK	19.22	31.46	50.68	108.52	-57.84
0.13	PK	19.11	29.15	48.26	105.33	-57.07
0.21	PK	19.02	32.56	51.58	101.16	-49.58
0.93	QP	19.08	26.80	45.88	68.23	-22.35
1.7	QP	18.94	16.29	35.23	63.00	-27.77
2.12	QP	18.84	15.28	34.12	69.54	-35.42
8.63	QP	20.36	11.84	32.20	69.54	-37.34
8.81	QP	20.39	12.36	32.75	69.54	-36.79

備註：

1. 實際值(dBμV/m)=讀值(dBμV)+修正因子(dB/m)
2. 修正因子(dB/m)=天線因子(dB/m)+傳輸線損耗(dB)
3. 容差=實際值 - 限制值
4. 未列於上表之混附發射，表示其輻射場強強度遠小於儀器之背景雜訊
5. 以上測試結果符合規範

Chain 0

極性	頻率 (MHz)	檢測值	修正 因子 (dB/m)	讀值 (dBμV)	實際值 (dBμV/m)	限制值 @ 3m (dBμV/m)	容差 (dB)
Vertical	33.88	QP	19.35	11.87	31.22	40.00	-8.78
Vertical	150.28	QP	20.55	12.09	32.64	43.50	-10.86
Vertical	225.94	QP	18.89	10.70	29.59	46.00	-16.41
Vertical	334.58	QP	22.64	12.46	35.10	46.00	-10.90
Vertical	491.72	QP	26.75	7.82	34.57	46.00	-11.43
Vertical	850.62	QP	32.78	7.37	40.15	46.00	-5.85
Horizontal	31.94	QP	19.24	6.85	26.09	40.00	-13.91
Horizontal	128.94	QP	18.98	13.81	32.79	43.50	-10.71
Horizontal	225.94	QP	18.89	13.24	32.13	46.00	-13.87
Horizontal	241.46	QP	19.69	18.86	38.55	46.00	-7.45
Horizontal	322.94	QP	22.34	13.76	36.10	46.00	-9.90
Horizontal	804.06	QP	32.14	7.09	39.23	46.00	-6.77

備註：

1. 實際值(dBμV/m)=讀值(dBμV)+修正因子(dB/m)
2. 修正因子(dB/m)=天線因子(dB/m)+傳輸線損耗(dB)
3. 容差=實際值 - 限制值
4. 未列於上表之混附發射，表示其輻射場強強度遠小於儀器之背景雜訊
5. 以上測試結果符合規範

6.4.2 頻率大於 1 GHz

溫度 : 20 °C

相對濕度 : 55 %

大氣壓力 : 1008 hPa

測試日期 : 2018/1/23

儀器設定

Peak & Average

RBW : 1 MHz

VBW : 3 MHz

Chain0

模式	頻率	檢測值	天線極性	修正因子	讀值	實際值	限制值 @ 3 m	容差
802.11b Ch 1 2412MHz	1728	PK	V	32.09	13.63	45.72	74.00	-28.28
	1792	PK	V	32.74	14.23	46.97	74.00	-27.03
	1984	PK	V	34.68	12.77	47.45	74.00	-26.55
	4980	PK	V	6.42	43.92	50.34	74.00	-23.66
	7236	PK	V	12.47	35.64	48.11	74.00	-25.89
	9648	PK	V	16.36	33.70	50.06	74.00	-23.94
	4824	PK	H	5.83	39.28	45.11	74.00	-28.89
	7236	PK	H	12.47	36.56	49.03	74.00	-24.97
	9648	PK	H	16.36	34.16	50.52	74.00	-23.48
802.11b Ch 6 2437MHz	1196	PK	V	29.30	11.85	41.15	74.00	-32.85
	1292	PK	V	29.45	11.90	41.35	74.00	-32.65
	1872	PK	V	33.55	14.68	48.23	74.00	-25.77
	1932	PK	V	34.15	14.61	48.76	74.00	-25.24
	1968	PK	V	34.52	15.46	49.98	74.00	-24.02
	2184	PK	V	34.94	12.59	47.53	74.00	-26.47
	4980	PK	V	6.42	43.69	50.11	74.00	-23.89
	7311	PK	V	12.72	35.80	48.52	74.00	-25.48
	9748	PK	V	16.69	34.41	51.10	74.00	-22.90
	4980	PK	H	6.42	38.87	45.29	74.00	-28.71
	7311	PK	H	12.72	36.01	48.73	74.00	-25.27
	9748	PK	H	16.69	33.87	50.56	74.00	-23.44
802.11b Ch 11 2462MHz	1772	PK	V	32.54	16.25	48.79	74.00	-25.21
	1796	PK	V	32.78	17.05	49.83	74.00	-24.17
	1884	PK	V	33.67	14.05	47.72	74.00	-26.28
	2076	PK	V	34.88	13.80	48.68	74.00	-25.32
	2316	PK	V	35.00	12.56	47.56	74.00	-26.44
	4980	PK	V	6.42	42.71	49.13	74.00	-24.87
	7386	PK	V	12.98	35.73	48.71	74.00	-25.29
	9848	PK	V	17.03	34.22	51.25	74.00	-22.75
	4920	PK	H	6.19	40.33	46.52	74.00	-27.48
	7386	PK	H	12.98	35.03	48.01	74.00	-25.99
	9848	PK	H	17.03	34.75	51.78	74.00	-22.22
802.11g Ch 1 2412MHz	1124	PK	V	29.18	12.00	41.18	74.00	-32.82
	1708	PK	V	31.89	12.94	44.83	74.00	-29.17
	1776	PK	V	32.58	14.51	47.09	74.00	-26.91
	1856	PK	V	33.39	14.35	47.74	74.00	-26.26
	1904	PK	V	33.87	14.17	48.04	74.00	-25.96

模式	頻率	檢測值	天線極性	修正因子	讀值	實際值	限制值 @ 3 m	容差
802.11g Ch 1 2412MHz	2176	PK	V	34.93	12.26	47.19	74.00	-26.81
	4980	PK	V	6.42	43.88	50.30	74.00	-23.70
	7236	PK	V	12.47	35.93	48.40	74.00	-25.60
	9648	PK	V	16.36	33.61	49.97	74.00	-24.03
	4980	PK	H	6.42	39.22	45.64	74.00	-28.36
	7236	PK	H	12.47	39.36	51.83	74.00	-22.17
	9648	PK	H	16.36	33.67	50.03	74.00	-23.97
802.11g Ch 6 2437MHz	1212	PK	V	29.32	12.11	41.43	74.00	-32.57
	1332	PK	V	29.52	12.22	41.74	74.00	-32.26
	1708	PK	V	31.89	12.60	44.49	74.00	-29.51
	1752	PK	V	32.34	13.28	45.62	74.00	-28.38
	1852	PK	V	33.35	15.45	48.80	74.00	-25.20
	1964	PK	V	34.48	13.69	48.17	74.00	-25.83
	2000	PK	V	34.84	13.46	48.30	74.00	-25.70
	2064	PK	V	34.87	12.05	46.92	74.00	-27.08
	4980	PK	V	6.42	43.80	50.22	74.00	-23.78
	7311	PK	V	12.72	36.61	49.33	74.00	-24.67
	9748	PK	V	16.69	33.69	50.38	74.00	-23.62
	1232	PK	H	29.36	11.54	40.90	74.00	-33.10
	4860	PK	H	5.96	39.24	45.20	74.00	-28.80
	7311	PK	H	12.72	35.63	48.35	74.00	-25.65
	9784	PK	H	16.81	33.21	50.02	74.00	-23.98
802.11g Ch 11 2462MHz	1164	PK	V	29.25	13.59	42.84	74.00	-31.16
	1288	PK	V	29.45	13.79	43.24	74.00	-30.76
	1328	PK	V	29.51	14.52	44.03	74.00	-29.97
	1752	PK	V	32.34	14.12	46.46	74.00	-27.54
	1844	PK	V	33.26	14.58	47.84	74.00	-26.16
	1972	PK	V	34.56	11.95	46.51	74.00	-27.49
	2012	PK	V	34.85	12.34	47.19	74.00	-26.81
	4980	PK	V	6.42	44.17	50.59	74.00	-23.41
	7386	PK	V	12.98	36.08	49.06	74.00	-24.94
	9848	PK	V	17.03	33.46	50.49	74.00	-23.51
	1076	PK	H	29.10	9.81	38.91	74.00	-35.09
	1924	PK	H	34.07	10.87	44.94	74.00	-29.06
	4920	PK	H	6.19	41.54	47.73	74.00	-26.27
	7386	PK	H	12.98	35.76	48.74	74.00	-25.26
	9848	PK	H	17.03	34.74	51.77	74.00	-22.23

模式	頻率	檢測值	天線極性	修正因子	讀值	實際值	限制值 @ 3 m	容差
802.11n (HT20) Ch 1 2412MHz	1144	PK	V	29.21	10.85	40.06	74.00	-33.94
	1328	PK	V	29.51	17.19	46.70	74.00	-27.30
	1812	PK	V	32.94	15.59	48.53	74.00	-25.47
	1880	PK	V	33.63	14.00	47.63	74.00	-26.37
	1996	PK	V	34.80	12.49	47.29	74.00	-26.71
	2348	PK	V	35.02	13.19	48.21	74.00	-25.79
	4980	PK	V	6.42	43.43	49.85	74.00	-24.15
	7236	PK	V	12.47	36.10	48.57	74.00	-25.43
	9648	PK	V	16.36	33.49	49.85	74.00	-24.15
	4980	PK	H	6.42	37.93	44.35	74.00	-29.65
	7326	PK	H	12.78	35.89	48.67	74.00	-25.33
	9648	PK	H	16.36	35.03	51.39	74.00	-22.61
802.11n(HT20) Ch 6 2437MHz	1296	PK	V	29.46	12.35	41.81	74.00	-32.19
	1332	PK	V	29.52	16.75	46.27	74.00	-27.73
	1760	PK	V	32.42	13.60	46.02	74.00	-27.98
	1808	PK	V	32.90	13.11	46.01	74.00	-27.99
	1900	PK	V	33.83	12.88	46.71	74.00	-27.29
	1992	PK	V	34.76	13.41	48.17	74.00	-25.83
	4980	PK	V	6.42	43.69	50.11	74.00	-23.89
	7311	PK	V	12.72	35.54	48.26	74.00	-25.74
	9748	PK	V	16.69	34.20	50.89	74.00	-23.11
	4980	PK	H	6.42	38.25	44.67	74.00	-29.33
	7311	PK	H	12.72	36.05	48.77	74.00	-25.23
	9748	PK	H	16.69	33.36	50.05	74.00	-23.95
802.11n(HT20) Ch 11 2462MHz	1232	PK	V	29.36	11.74	41.10	74.00	-32.90
	1820	PK	V	33.02	13.76	46.78	74.00	-27.22
	1960	PK	V	34.44	13.36	47.80	74.00	-26.20
	4980	PK	V	6.42	43.22	49.64	74.00	-24.36
	7386	PK	V	12.98	35.21	48.19	74.00	-25.81
	9848	PK	V	17.03	33.50	50.53	74.00	-23.47
	4924	PK	H	6.21	39.32	45.53	74.00	-28.47
	7386	PK	H	12.98	35.86	48.84	74.00	-25.16
	9848	PK	H	17.03	33.69	50.72	74.00	-23.28
802.11n(HT40) Ch 3 2422MHz	1228	PK	V	29.35	12.67	42.02	74.00	-31.98
	1332	PK	V	29.52	13.93	43.45	74.00	-30.55
	1828	PK	V	33.10	14.02	47.12	74.00	-26.88
	1888	PK	V	33.71	13.34	47.05	74.00	-26.95
	2036	PK	V	34.86	12.77	47.63	74.00	-26.37

模式	頻率	檢測值	天線極性	修正因子	讀值	實際值	限制值 @ 3 m	容差
802.11n(HT40) Ch 3 2422MHz	2196	PK	V	34.94	12.39	47.33	74.00	-26.67
	4980	PK	V	6.42	43.21	49.63	74.00	-24.37
	7266	PK	V	12.57	36.06	48.63	74.00	-25.37
	9688	PK	V	16.49	34.08	50.57	74.00	-23.43
	4844	PK	H	5.90	36.87	42.77	74.00	-31.23
	7266	PK	H	12.57	35.66	48.23	74.00	-25.77
	9688	PK	H	16.49	33.97	50.46	74.00	-23.54
802.11n(HT40) Ch 6 2437MHz	1724	PK	V	32.05	14.35	46.40	74.00	-27.60
	1768	PK	V	32.50	14.21	46.71	74.00	-27.29
	1808	PK	V	32.90	15.53	48.43	74.00	-25.57
	1860	PK	V	33.43	15.29	48.72	74.00	-25.28
	1892	PK	V	33.75	14.60	48.35	74.00	-25.65
	1996	PK	V	34.80	11.68	46.48	74.00	-27.52
	4980	PK	V	6.42	43.02	49.44	74.00	-24.56
	7311	PK	V	12.72	36.84	49.56	74.00	-24.44
	9748	PK	V	16.69	33.51	50.20	74.00	-23.80
	4874	PK	H	6.02	37.95	43.97	74.00	-30.03
	7311	PK	H	12.72	35.67	48.39	74.00	-25.61
	9748	PK	H	16.69	33.49	50.18	74.00	-23.82
802.11n(HT40) Ch 9 2452MHz	1064	PK	V	29.08	13.48	42.56	74.00	-31.44
	1136	PK	V	29.20	12.78	41.98	74.00	-32.02
	1224	PK	V	29.34	12.90	42.24	74.00	-31.76
	1332	PK	V	29.52	14.88	44.40	74.00	-29.60
	1804	PK	V	32.86	13.61	46.47	74.00	-27.53
	1976	PK	V	34.60	14.06	48.66	74.00	-25.34
	4980	PK	V	6.42	43.64	50.06	74.00	-23.94
	7356	PK	V	12.88	36.11	48.99	74.00	-25.01
	9808	PK	V	16.89	33.78	50.67	74.00	-23.33
	4980	PK	H	6.42	37.79	44.21	74.00	-29.79
	7356	PK	H	12.88	35.64	48.52	74.00	-25.48
	9808	PK	H	16.89	33.82	50.71	74.00	-23.29

備註：

1. 實際值(dBμV/m)=讀值(dBμV)+修正因子(dB/m)
2. 修正因子(dB/m)=天線因子(dB/m)+傳輸線損耗(dB)
3. 容差=實際值 - 限制值
4. 未列於上表之混附發射，表示其輻射場強強度遠小於儀器之背景雜訊
5. 以上測試結果符合規範

Chain1

模式	頻率 (MHz)	檢測值	天線 極性 (H/V)	修正 因子 (dB/m)	讀值 (dBμV)	實際值 (dBμV/m)	限制值 @ 3 m (dBμV/m)	容差 (dB)
802.11b Ch 1 2412MHz	1800	PK	V	32.82	14.46	47.28	74.00	-26.72
	1908	PK	V	33.91	13.94	47.85	74.00	-26.15
	1996	PK	V	34.80	13.20	48.00	74.00	-26.00
	2280	PK	V	34.99	11.72	46.71	74.00	-27.29
	4980	PK	V	6.42	43.16	49.58	74.00	-24.42
	7236	PK	V	12.47	35.39	47.86	74.00	-26.14
	9648	PK	V	16.36	34.49	50.85	74.00	-23.15
	4824	PK	H	5.83	39.97	45.80	74.00	-28.20
	7236	PK	H	12.47	36.36	48.83	74.00	-25.17
	9648	PK	H	16.36	34.78	51.14	74.00	-22.86
802.11b Ch 6 2437MHz	1764	PK	V	32.46	15.84	48.30	74.00	-25.70
	1844	PK	V	33.26	12.82	46.08	74.00	-27.92
	1912	PK	V	33.95	13.24	47.19	74.00	-26.81
	1964	PK	V	34.48	13.74	48.22	74.00	-25.78
	4980	PK	V	6.42	43.02	49.44	74.00	-24.56
	7311	PK	V	12.72	36.35	49.07	74.00	-24.93
	9748	PK	V	16.69	33.48	50.17	74.00	-23.83
	4980	PK	H	6.42	38.60	45.02	74.00	-28.98
	7311	PK	H	12.72	35.91	48.63	74.00	-25.37
	9748	PK	H	16.69	34.00	50.69	74.00	-23.31
802.11b Ch 11 2462MHz	1328	PK	V	29.51	13.19	42.70	74.00	-31.30
	1720	PK	V	32.01	11.93	43.94	74.00	-30.06
	1744	PK	V	32.25	13.19	45.44	74.00	-28.56
	1832	PK	V	33.14	17.46	50.60	74.00	-23.40
	1968	PK	V	34.52	11.92	46.44	74.00	-27.56
	2092	PK	V	34.89	12.12	47.01	74.00	-26.99
	4980	PK	V	6.42	43.27	49.69	74.00	-24.31
	7386	PK	V	12.98	35.07	48.05	74.00	-25.95
	9848	PK	V	17.03	32.98	50.01	74.00	-23.99
	4920	PK	H	6.19	40.81	47.00	74.00	-27.00
	7386	PK	H	12.98	35.98	48.96	74.00	-25.04
	9848	PK	H	17.03	34.08	51.11	74.00	-22.89

模式	頻率 (MHz)	檢測值	天線 極性 (H/V)	修正 因子 (dB/m)	讀值 (dBμV)	實際值 (dBμV/m)	限制值 @ 3 m (dBμV/m)	容差 (dB)
802.11g Ch 1 2412MHz	1232	PK	V	29.36	12.57	41.93	74.00	-32.07
	1332	PK	V	29.52	18.38	47.90	74.00	-26.10
	1752	PK	V	32.34	14.28	46.62	74.00	-27.38
	1772	PK	V	32.54	13.88	46.42	74.00	-27.58
	1820	PK	V	33.02	16.05	49.07	74.00	-24.93
	1860	PK	V	33.43	12.48	45.91	74.00	-28.09
	1996	PK	V	34.80	11.04	45.84	74.00	-28.16
	4980	PK	V	6.42	43.18	49.60	74.00	-24.40
	7236	PK	V	12.47	36.47	48.94	74.00	-25.06
	9648	PK	V	16.36	33.63	49.99	74.00	-24.01
	1012	PK	H	29.00	10.80	39.80	74.00	-34.20
	1948	PK	H	34.31	10.33	44.64	74.00	-29.36
	2504	PK	H	35.11	13.34	48.45	74.00	-25.55
	4824	PK	H	5.83	41.08	46.91	74.00	-27.09
	7230	PK	H	12.45	40.36	52.81	74.00	-21.19
	9648	PK	H	16.36	34.04	50.40	74.00	-23.60
802.11g Ch 6 2437MHz	1140	PK	V	29.21	12.72	41.93	74.00	-32.07
	1196	PK	V	29.30	13.41	42.71	74.00	-31.29
	1328	PK	V	29.51	18.91	48.42	74.00	-25.58
	1836	PK	V	33.18	14.90	48.08	74.00	-25.92
	1892	PK	V	33.75	13.12	46.87	74.00	-27.13
	1992	PK	V	34.76	15.06	49.82	74.00	-24.18
	2088	PK	V	34.89	12.04	46.93	74.00	-27.07
	2304	PK	V	35.00	10.96	45.96	74.00	-28.04
	4980	PK	V	6.42	44.62	51.04	74.00	-22.96
	7311	PK	V	12.72	35.90	48.62	74.00	-25.38
	9748	PK	V	16.69	33.36	50.05	74.00	-23.95
	4874	PK	H	6.02	38.86	44.88	74.00	-29.12
	7311	PK	H	12.72	35.94	48.66	74.00	-25.34
	9748	PK	H	16.69	34.82	51.51	74.00	-22.49
802.11g Ch 11 2462MHz	1328	PK	V	29.51	15.56	45.07	74.00	-28.93
	1808	PK	V	32.90	14.85	47.75	74.00	-26.25
	1888	PK	V	33.71	13.94	47.65	74.00	-26.35
	2060	PK	V	34.87	13.05	47.92	74.00	-26.08
	4980	PK	V	6.42	43.19	49.61	74.00	-24.39
	7386	PK	V	12.98	36.27	49.25	74.00	-24.75
	9848	PK	V	17.03	33.38	50.41	74.00	-23.59
	4920	PK	H	6.19	40.95	47.14	74.00	-26.86
	7386	PK	H	12.98	35.32	48.30	74.00	-25.70
	9848	PK	H	17.03	33.48	50.51	74.00	-23.49

模式	頻率 (MHz)	檢測值	天線 極性 (H/V)	修正 因子 (dB/m)	讀值 (dBμV)	實際值 (dBμV/m)	限制值 @ 3 m (dBμV/m)	容差 (dB)
802.11n (HT20) Ch 1 2412MHz	1232	PK	V	29.36	12.49	41.85	74.00	-32.15
	1732	PK	V	32.13	12.61	44.74	74.00	-29.26
	1796	PK	V	32.78	14.21	46.99	74.00	-27.01
	1832	PK	V	33.14	14.31	47.45	74.00	-26.55
	1904	PK	V	33.87	13.62	47.49	74.00	-26.51
	2000	PK	V	34.84	13.06	47.90	74.00	-26.10
	4980	PK	V	6.42	43.10	49.52	74.00	-24.48
	7236	PK	V	12.47	36.71	49.18	74.00	-24.82
	9648	PK	V	16.36	34.66	51.02	74.00	-22.98
	4980	PK	H	6.42	39.20	45.62	74.00	-28.38
	7236	PK	H	12.47	36.16	48.63	74.00	-25.37
	9648	PK	H	16.36	34.79	51.15	74.00	-22.85
802.11n (HT20) Ch 6 2437MHz	1328	PK	V	29.51	10.97	40.48	74.00	-33.52
	1816	PK	V	32.98	12.03	45.01	74.00	-28.99
	2024	PK	V	34.85	11.40	46.25	74.00	-27.75
	2060	PK	V	34.87	11.34	46.21	74.00	-27.79
	2116	PK	V	34.90	10.63	45.53	74.00	-28.47
	2376	PK	V	35.04	12.14	47.18	74.00	-26.82
	4980	PK	V	6.42	42.75	49.17	74.00	-24.83
	7311	PK	V	12.72	36.79	49.51	74.00	-24.49
	9748	PK	V	16.69	33.91	50.60	74.00	-23.40
	4874	PK	H	6.02	38.19	44.21	74.00	-29.79
	7311	PK	H	12.72	35.70	48.42	74.00	-25.58
	9748	PK	H	16.69	34.15	50.84	74.00	-23.16
802.11n (HT20) Ch 11 2462MHz	1248	PK	V	29.38	12.52	41.90	74.00	-32.10
	1332	PK	V	29.52	13.85	43.37	74.00	-30.63
	1752	PK	V	32.34	13.81	46.15	74.00	-27.85
	1804	PK	V	32.86	12.58	45.44	74.00	-28.56
	1840	PK	V	33.22	14.21	47.43	74.00	-26.57
	1868	PK	V	33.51	14.30	47.81	74.00	-26.19
	4980	PK	V	6.42	43.02	49.44	74.00	-24.56
	7386	PK	V	12.98	35.25	48.23	74.00	-25.77
	9848	PK	V	17.03	33.61	50.64	74.00	-23.36
	4924	PK	H	6.21	37.37	43.58	74.00	-30.42
	7386	PK	H	12.98	34.75	47.73	74.00	-26.27
	9848	PK	H	17.03	33.92	50.95	74.00	-23.05

模式	頻率 (MHz)	檢測值	天線 極性 (H/V)	修正 因子 (dB/m)	讀值 (dBμV)	實際值 (dBμV/m)	限制值 @ 3 m (dBμV/m)	容差 (dB)
802.11n (HT40) Ch 3 2422MHz	1016	PK	V	29.01	12.29	41.30	74.00	-32.70
	1244	PK	V	29.38	13.01	42.39	74.00	-31.61
	1756	PK	V	32.38	12.73	45.11	74.00	-28.89
	1868	PK	V	33.51	13.32	46.83	74.00	-27.17
	2004	PK	V	34.84	13.49	48.33	74.00	-25.67
	2292	PK	V	34.99	11.87	46.86	74.00	-27.14
	4980	PK	V	6.42	42.40	48.82	74.00	-25.18
	7266	PK	V	12.57	35.31	47.88	74.00	-26.12
	9688	PK	V	16.49	34.21	50.70	74.00	-23.30
	4980	PK	H	6.42	38.15	44.57	74.00	-29.43
	7266	PK	H	12.57	34.53	47.10	74.00	-26.90
	9688	PK	H	16.49	34.02	50.51	74.00	-23.49
802.11n (HT40) Ch 6 2437MHz	1756	PK	V	32.38	13.73	46.11	74.00	-27.89
	1808	PK	V	32.90	15.43	48.33	74.00	-25.67
	1876	PK	V	33.59	15.51	49.10	74.00	-24.90
	1928	PK	V	34.11	14.93	49.04	74.00	-24.96
	1984	PK	V	34.68	16.05	50.73	74.00	-23.27
	2012	PK	V	34.85	13.74	48.59	74.00	-25.41
	4980	PK	V	6.42	43.10	49.52	74.00	-24.48
	7311	PK	V	12.72	35.30	48.02	74.00	-25.98
	9748	PK	V	16.69	33.96	50.65	74.00	-23.35
	4980	PK	H	6.42	39.96	46.38	74.00	-27.62
	7311	PK	H	12.72	34.90	47.62	74.00	-26.38
	9748	PK	H	16.69	34.54	51.23	74.00	-22.77
802.11n (HT40) Ch 9 2452MHz	1328	PK	V	29.51	13.84	43.35	74.00	-30.65
	1912	PK	V	33.95	13.15	47.10	74.00	-26.90
	1940	PK	V	34.23	14.37	48.60	74.00	-25.40
	1988	PK	V	34.72	12.47	47.19	74.00	-26.81
	2076	PK	V	34.88	13.63	48.51	74.00	-25.49
	2196	PK	V	34.94	13.37	48.31	74.00	-25.69
	4980	PK	V	6.42	43.30	49.72	74.00	-24.28
	7380	PK	V	12.96	34.72	47.68	74.00	-26.32
	9840	PK	V	17.00	33.27	50.27	74.00	-23.73
	4980	PK	H	6.42	38.24	44.66	74.00	-29.34
	7356	PK	H	12.88	35.88	48.76	74.00	-25.24
	9808	PK	H	16.89	33.35	50.24	74.00	-23.76

Chain0+1

模式	頻率 (MHz)	檢測值	天線 極性 (H/V)	修正 因子 (dB/m)	讀值 (dBμV)	實際值 (dBμV/m)	限制值 @ 3 m (dBμV/m)	容差 (dB)
802.11n(HT20) Ch 1 2412MHz	1232	PK	V	29.36	12.88	42.24	74.00	-31.76
	1788	PK	V	32.70	13.79	46.49	74.00	-27.51
	1844	PK	V	33.26	12.87	46.13	74.00	-27.87
	1904	PK	V	33.87	12.14	46.01	74.00	-27.99
	1996	PK	V	34.80	14.09	48.89	74.00	-25.11
	2208	PK	V	34.95	13.19	48.14	74.00	-25.86
	4980	PK	V	6.42	43.80	50.22	74.00	-23.78
	7236	PK	V	12.47	35.29	47.76	74.00	-26.24
	9648	PK	V	16.36	34.25	50.61	74.00	-23.39
	4980	PK	H	6.42	38.20	44.62	74.00	-29.38
	7236	PK	H	12.47	36.22	48.69	74.00	-25.31
	9648	PK	H	16.36	33.55	49.91	74.00	-24.09
802.11n(HT20) Ch 6 2437MHz	1332	PK	V	29.52	13.18	42.70	74.00	-31.30
	1720	PK	V	32.01	13.70	45.71	74.00	-28.29
	1744	PK	V	32.25	14.19	46.44	74.00	-27.56
	1812	PK	V	32.94	14.16	47.10	74.00	-26.90
	1836	PK	V	33.18	13.78	46.96	74.00	-27.04
	1972	PK	V	34.56	13.33	47.89	74.00	-26.11
	2060	PK	V	34.87	12.26	47.13	74.00	-26.87
	4980	PK	V	6.42	43.31	49.73	74.00	-24.27
	7311	PK	V	12.72	35.91	48.63	74.00	-25.37
	9748	PK	V	16.69	33.36	50.05	74.00	-23.95
	4874	PK	H	6.02	38.74	44.76	74.00	-29.24
	7311	PK	H	12.72	35.82	48.54	74.00	-25.46
	9748	PK	H	16.69	33.00	49.69	74.00	-24.31
802.11n(HT20) Ch 11 2462MHz	1332	PK	V	29.52	11.65	41.17	74.00	-32.83
	1728	PK	V	32.09	13.74	45.83	74.00	-28.17
	1764	PK	V	32.46	13.91	46.37	74.00	-27.63
	1844	PK	V	33.26	12.94	46.20	74.00	-27.80
	1956	PK	V	34.40	12.17	46.57	74.00	-27.43
	2076	PK	V	34.88	11.82	46.70	74.00	-27.30
	4980	PK	V	6.42	43.27	49.69	74.00	-24.31
	7386	PK	V	12.98	36.33	49.31	74.00	-24.69
	9848	PK	V	17.03	33.04	50.07	74.00	-23.93
	4920	PK	H	6.19	41.83	48.02	74.00	-25.98
	7386	PK	H	12.98	35.17	48.15	74.00	-25.85
	9848	PK	H	17.03	33.36	50.39	74.00	-23.61

模式	頻率 (MHz)	檢測值	天線 極性 (H/V)	修正 因子 (dB/m)	讀值 (dBμV)	實際值 (dBμV/m)	限制值 @ 3 m (dBμV/m)	容差 (dB)
802.11n(HT40) Ch 3 2422MHz	1328	PK	V	29.51	14.06	43.57	74.00	-30.43
	1956	PK	V	34.40	12.96	47.36	74.00	-26.64
	2008	PK	V	34.84	16.16	51.00	74.00	-23.00
	4980	PK	V	6.42	43.60	50.02	74.00	-23.98
	7266	PK	V	12.57	36.17	48.74	74.00	-25.26
	9688	PK	V	16.49	33.72	50.21	74.00	-23.79
	4980	PK	H	6.42	39.05	45.47	74.00	-28.53
	7266	PK	H	12.57	36.57	49.14	74.00	-24.86
	9688	PK	H	16.49	34.68	51.17	74.00	-22.83
802.11n(HT40) Ch 6 2437MHz	1012	PK	V	29.00	12.62	41.62	74.00	-32.38
	1328	PK	V	29.51	13.45	42.96	74.00	-31.04
	1732	PK	V	32.13	13.59	45.72	74.00	-28.28
	1804	PK	V	32.86	13.11	45.97	74.00	-28.03
	1888	PK	V	33.71	11.89	45.60	74.00	-28.40
	2084	PK	V	34.88	11.22	46.10	74.00	-27.90
	4980	PK	V	6.42	42.00	48.42	74.00	-25.58
	7311	PK	V	12.72	35.02	47.74	74.00	-26.26
	9748	PK	V	16.69	34.06	50.75	74.00	-23.25
	4874	PK	H	6.02	35.94	41.96	74.00	-32.04
	7311	PK	H	12.72	36.77	49.49	74.00	-24.51
	9748	PK	H	16.69	34.29	50.98	74.00	-23.02
802.11n(HT40) Ch 9 2452MHz	1084	PK	V	29.12	11.97	41.09	74.00	-32.91
	1332	PK	V	29.52	14.57	44.09	74.00	-29.91
	1664	PK	V	31.45	13.40	44.85	74.00	-29.15
	1824	PK	V	33.06	14.03	47.09	74.00	-26.91
	1860	PK	V	33.43	16.51	49.94	74.00	-24.06
	2084	PK	V	34.88	12.04	46.92	74.00	-27.08
	4980	PK	V	6.42	43.28	49.70	74.00	-24.30
	7356	PK	V	12.88	36.20	49.08	74.00	-24.92
	9808	PK	V	16.89	34.20	51.09	74.00	-22.91
	4980	PK	H	6.42	39.22	45.64	74.00	-28.36
	7356	PK	H	12.88	35.56	48.44	74.00	-25.56
	9808	PK	H	16.89	33.83	50.72	74.00	-23.28

備註：

1. 實際值(dBμV/m)=讀值(dBμV)+修正因子(dB/m)
2. 修正因子(dB/m)=天線因子(dB/m)+傳輸線損耗(dB)
3. 容差=實際值 - 限制值
4. 未列於上表之混附發射，表示其輻射場強強度遠小於儀器之背景雜訊
5. 以上測試結果符合規範

7. 傳導雜訊干擾測試

7.1 適用規範

依據國家通訊傳播委員會低功率射頻電機技術規範 3.10.1.5 之規定，使用頻帶範圍外之任意 100 kHz 內，發射器所產生的射頻功率相較於頻帶範圍中包含最高所需功率之 100 kHz 內的射頻功率，需衰減 20 分貝(dB)。


7.2 測試方法

將發射機之天線埠經由適當之衰減直接連至測試儀器。

量測範圍為：30 MHz ~ 25 GHz。

設定解析頻寬為 100 kHz，視訊頻寬大於等於解析頻寬。

7.3 測試配置圖

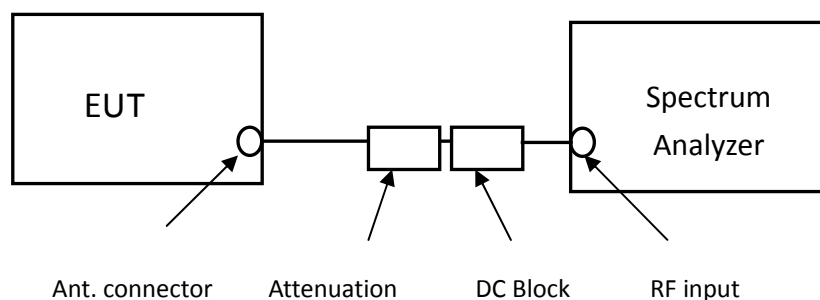

7.4 測試結果

溫度 : 25 °C

相對濕度 : 50 %

大氣壓力 : 1008 hPa

測試日期: 2018/01/17

儀器設定

RBW : 100 kHz


VBW : 300 kHz

Span : Auto


Sweep : Auto

SISO

Chain0 : Conducted Spurious @ 802.11b Mode Ch 1

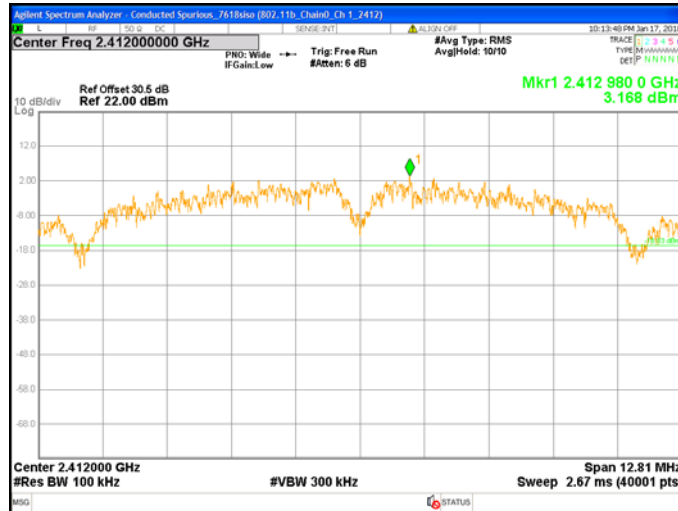


Chain0 : Conducted Spurious @ 802.11b Mode Ch 1

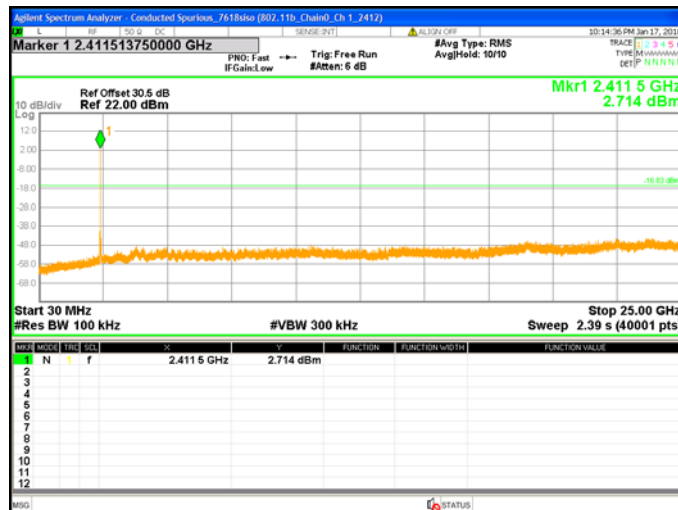


Chain0 : Conducted Spurious @ 802.11b Mode Ch 6




Chain0 : Conducted Spurious @ 802.11b Mode Ch 6

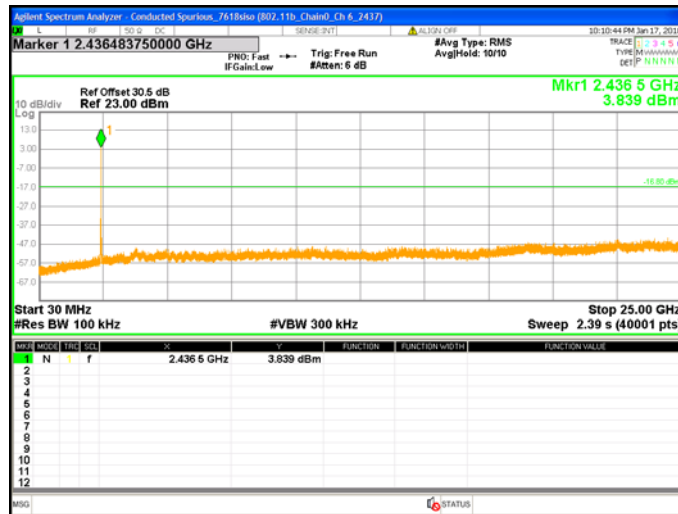


Chain0 : Conducted Spurious @ 802.11b Mode Ch11

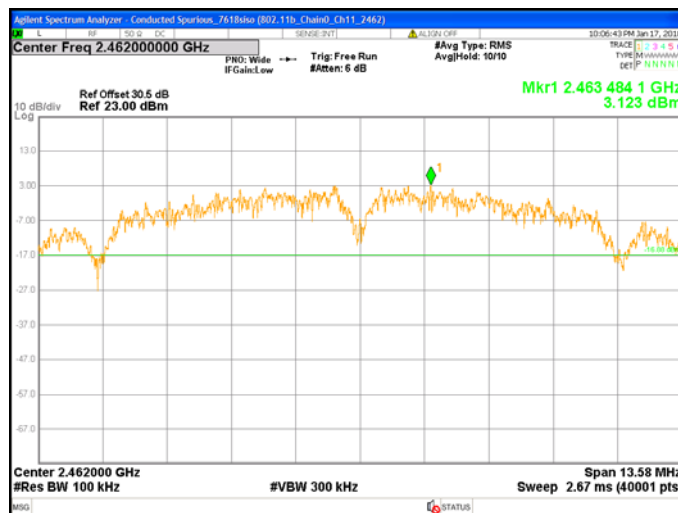


Chain0 : Conducted Spurious @ 802.11b Mode Ch11

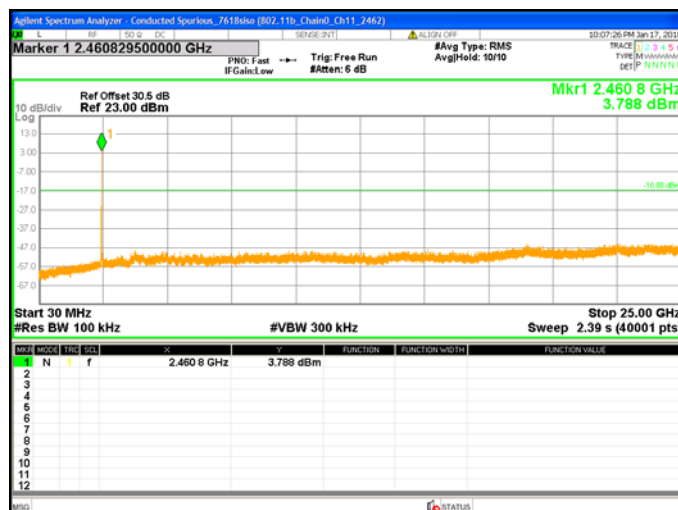


Chain1 : Conducted Spurious @ 802.11b Mode Ch 1

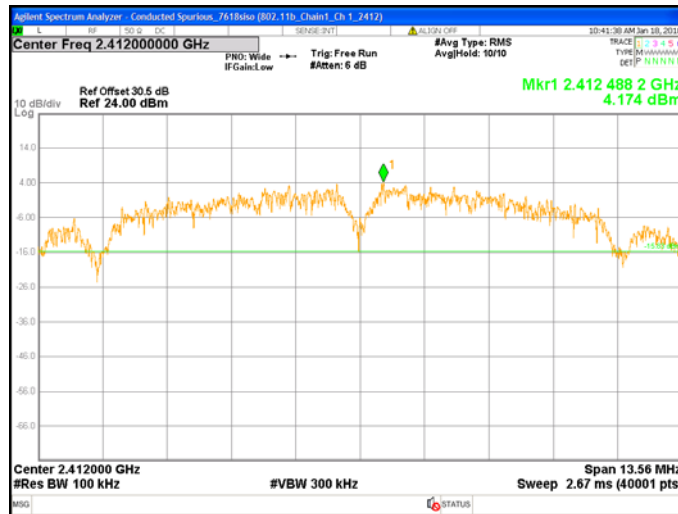


Chain1 : Conducted Spurious @ 802.11b Mode Ch 1

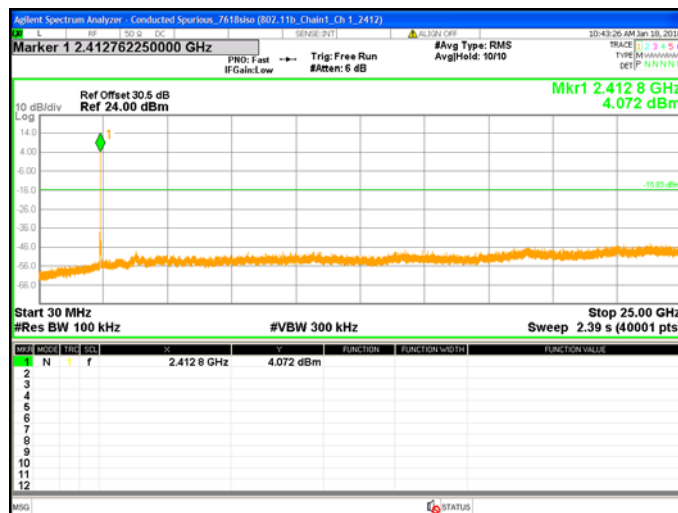


Chain1 : Conducted Spurious @ 802.11b Mode Ch 6

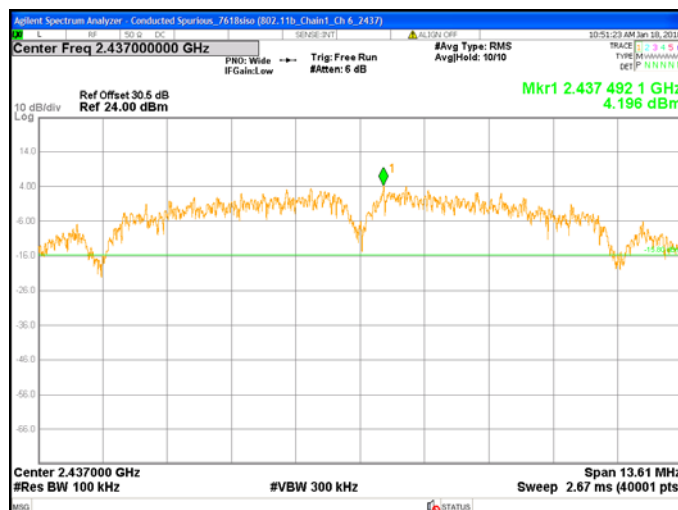


Chain1 : Conducted Spurious @ 802.11b Mode Ch 6

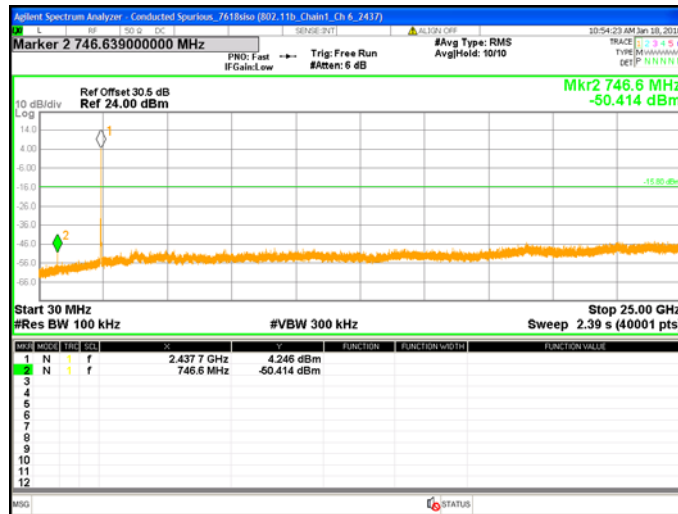


Chain1 : Conducted Spurious @ 802.11b Mode Ch11

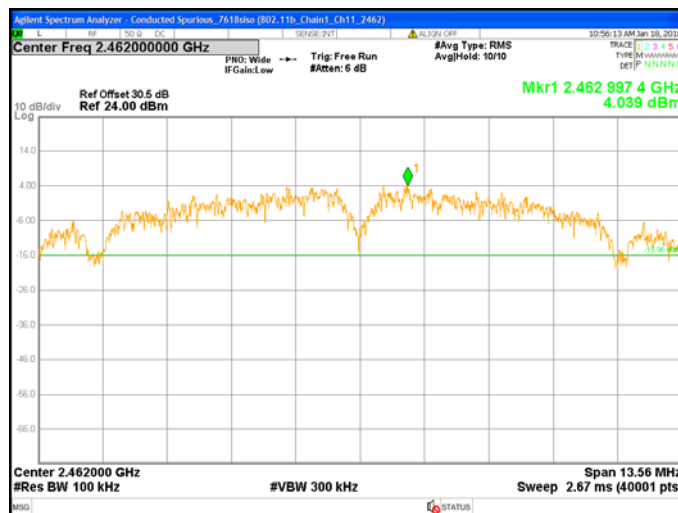


Chain1 : Conducted Spurious @ 802.11b Mode Ch11

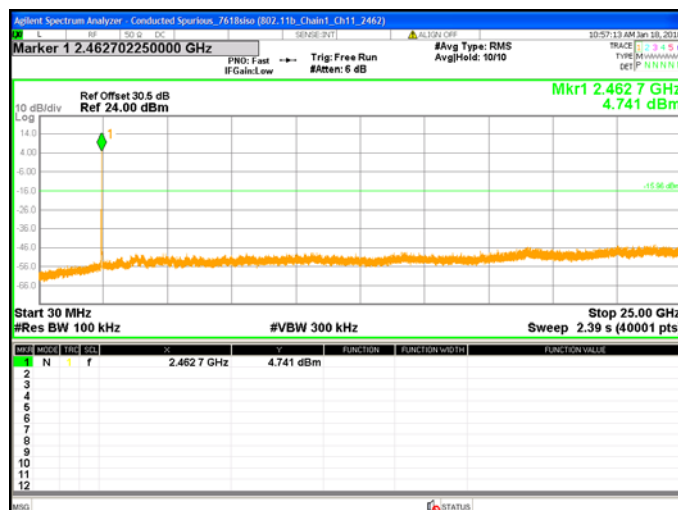


Chain0 : Conducted Spurious @ 802.11g Mode Ch 1

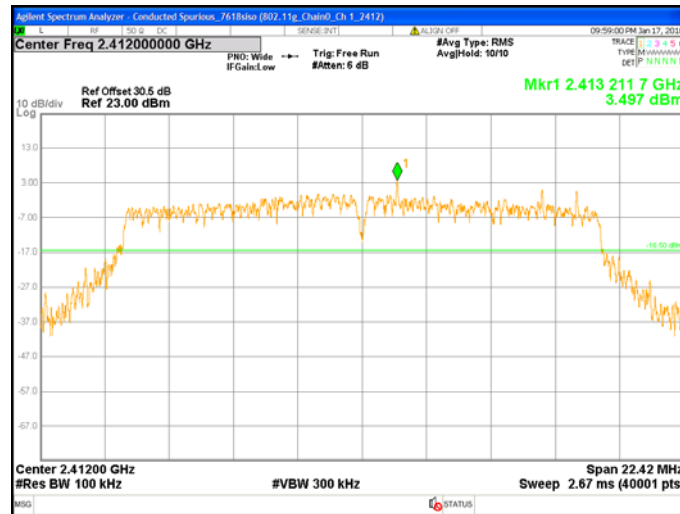


Chain0 : Conducted Spurious @ 802.11g Mode Ch 1

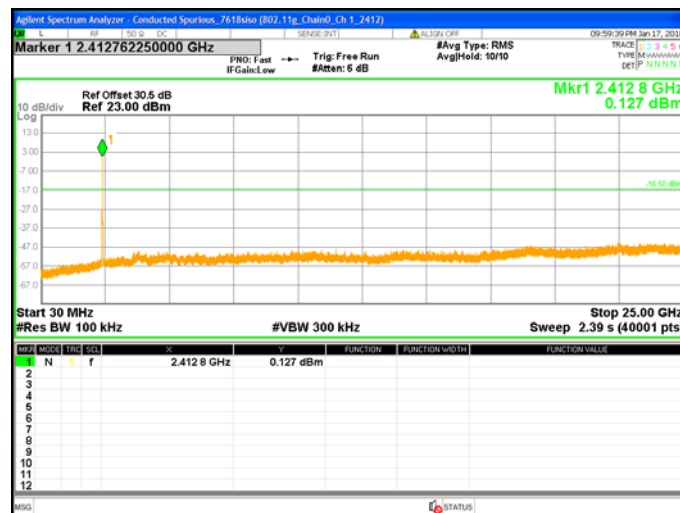


Chain0 : Conducted Spurious @ 802.11g Mode Ch 6

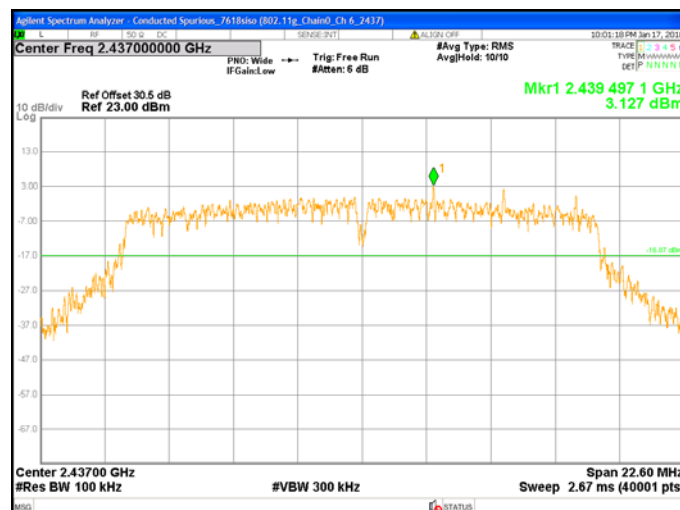


Chain0 : Conducted Spurious @ 802.11g Mode Ch 6

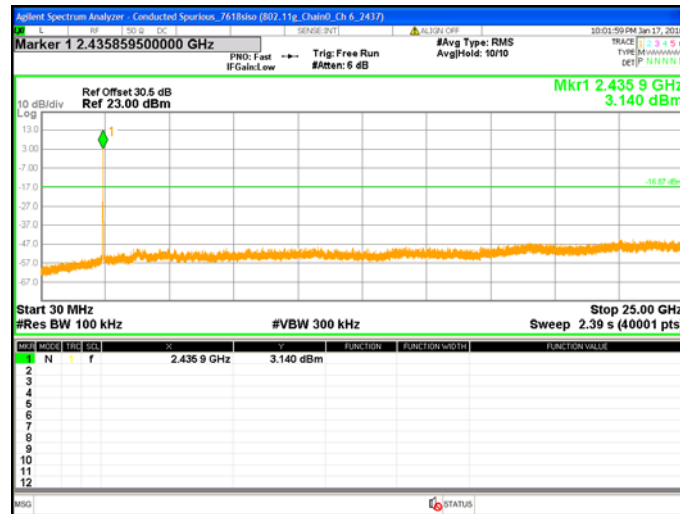


Chain0 : Conducted Spurious @ 802.11g Mode Ch11

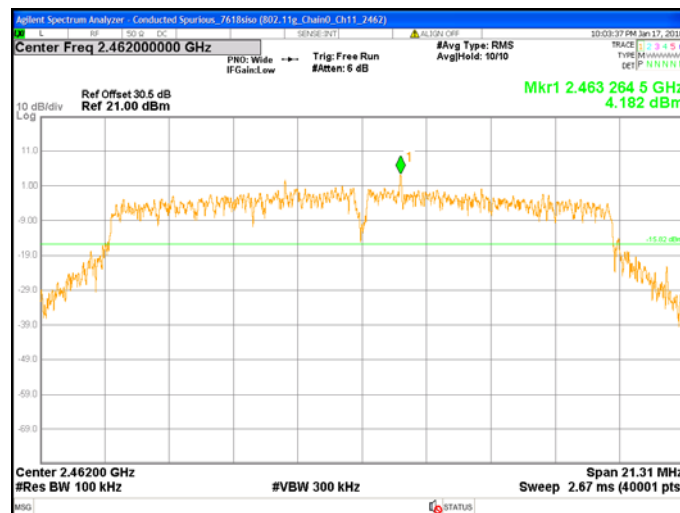


Chain0 : Conducted Spurious @ 802.11g Mode Ch11

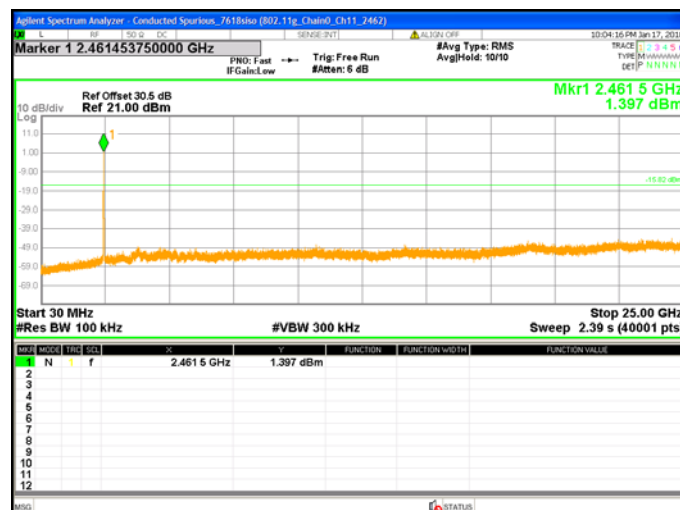


Chain1 : Conducted Spurious @ 802.11g Mode Ch 1

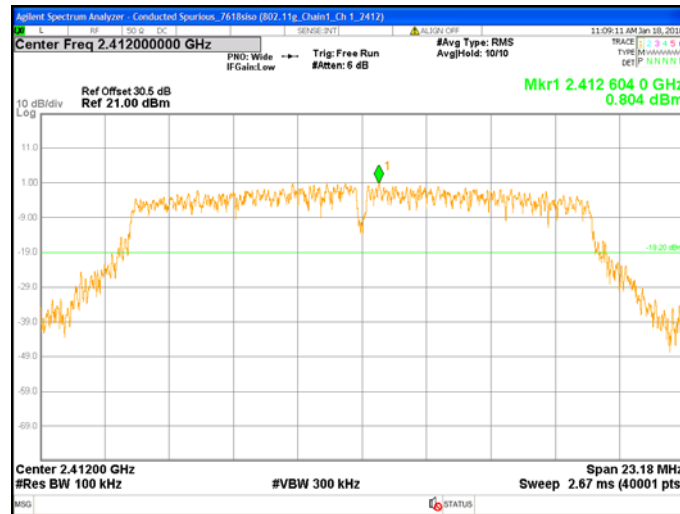


Chain1 : Conducted Spurious @ 802.11g Mode Ch 1

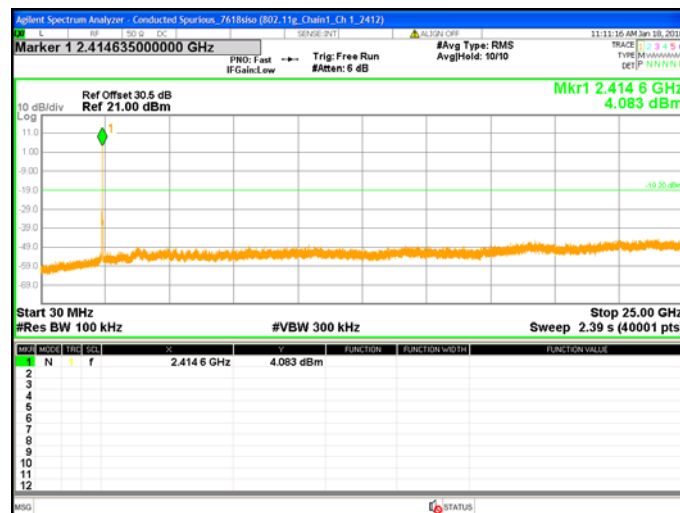


Chain1 : Conducted Spurious @ 802.11g Mode Ch 6

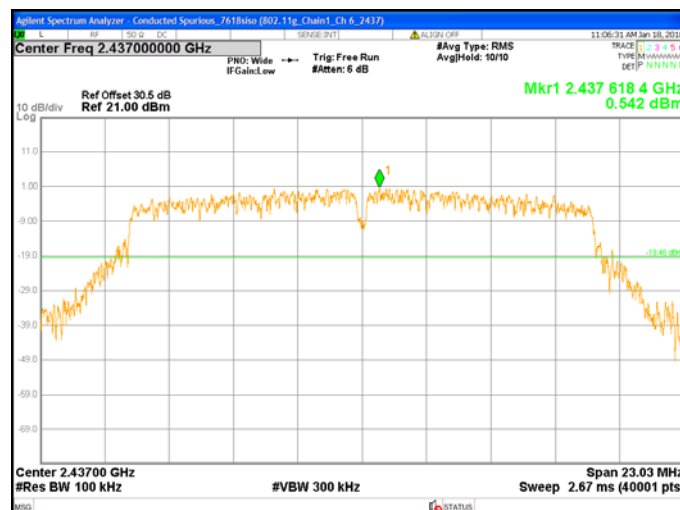


Chain1 : Conducted Spurious @ 802.11g Mode Ch 6

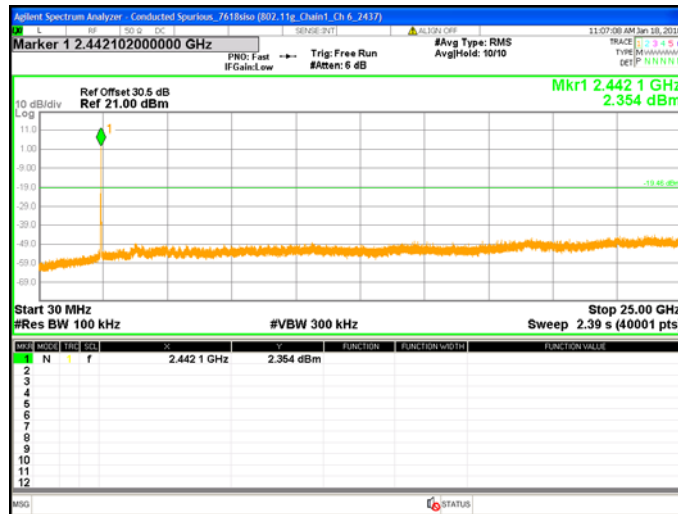


Chain1 : Conducted Spurious @ 802.11g Mode Ch11

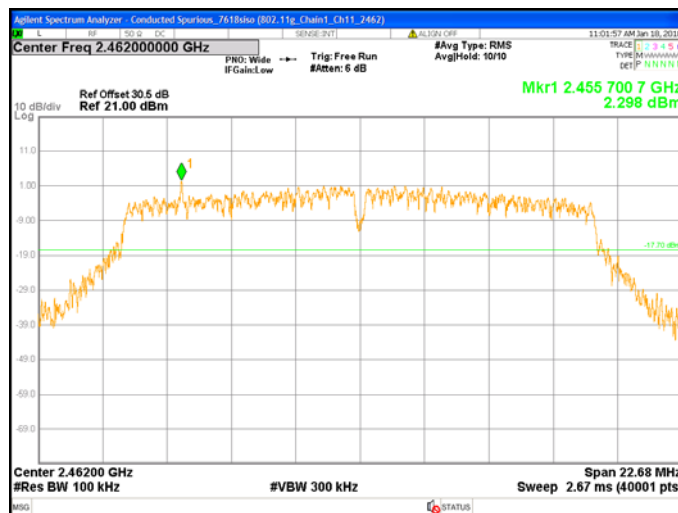


Chain1 : Conducted Spurious @ 802.11g Mode Ch11

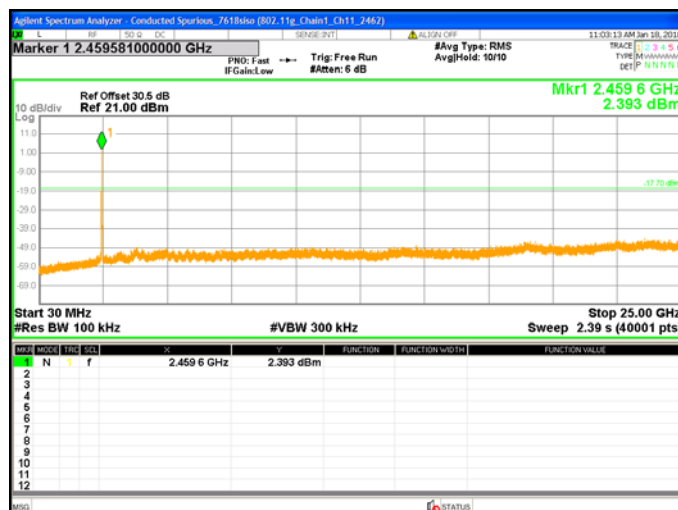


Chain0 : Conducted Spurious @ 802.11n(HT20) Mode Ch 1

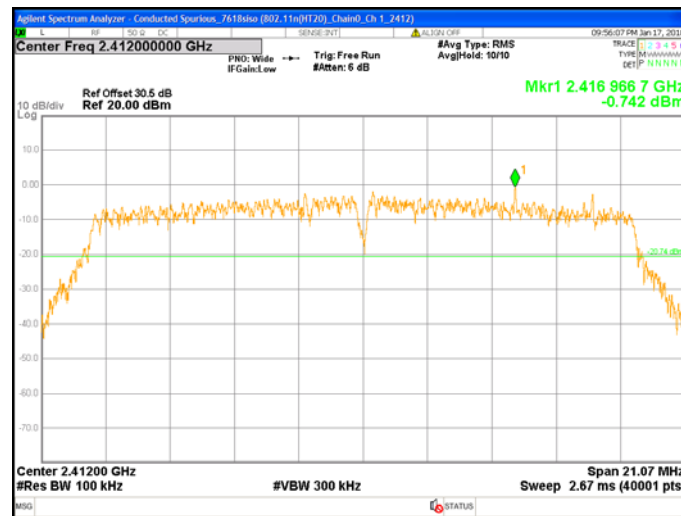


Chain0 : Conducted Spurious @ 802.11n(HT20) Mode Ch 1

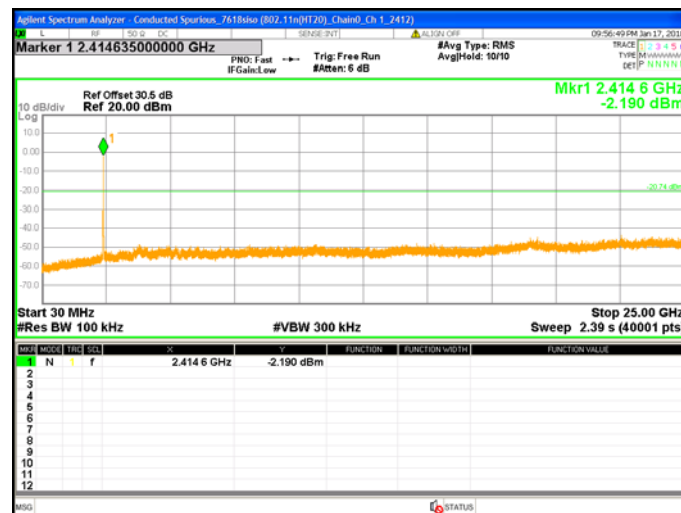


Chain0 : Conducted Spurious @ 802.11n(HT20) Mode Ch 6

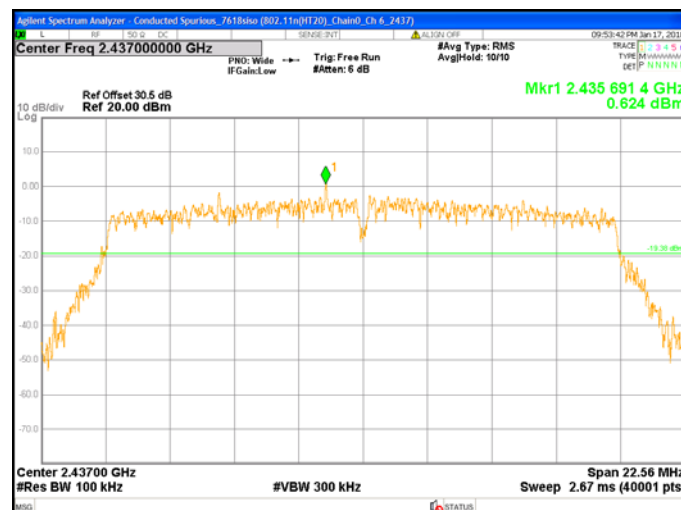


Chain0 : Conducted Spurious @ 802.11n(HT20) Mode Ch 6

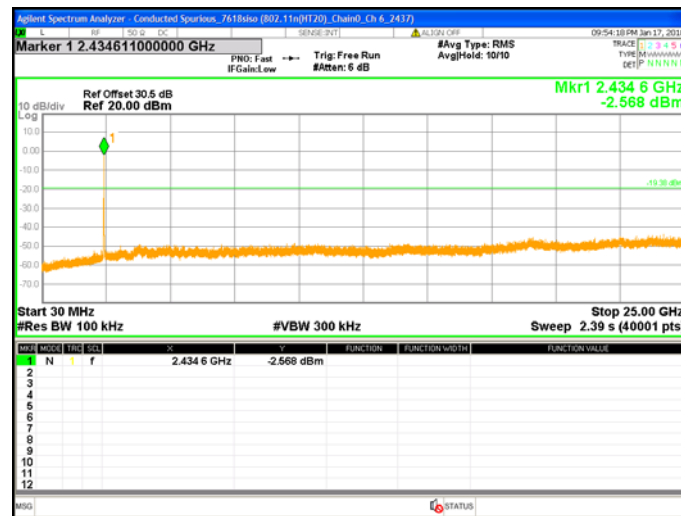


Chain0 : Conducted Spurious @ 802.11n(HT20) Mode Ch11

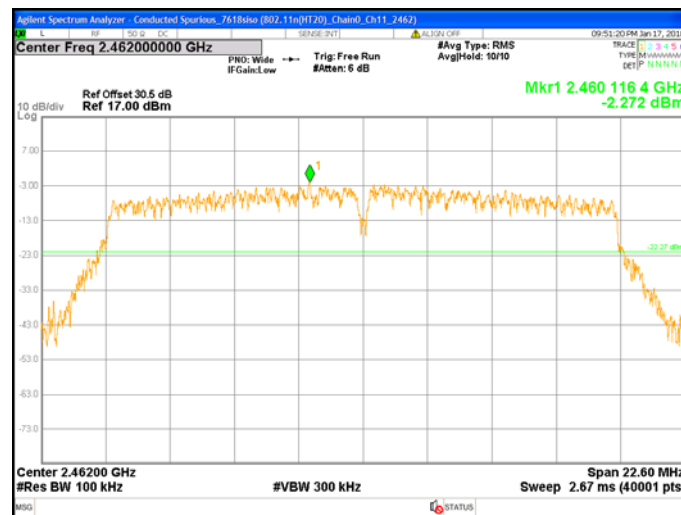


Chain0 : Conducted Spurious @ 802.11n(HT20) Mode Ch11

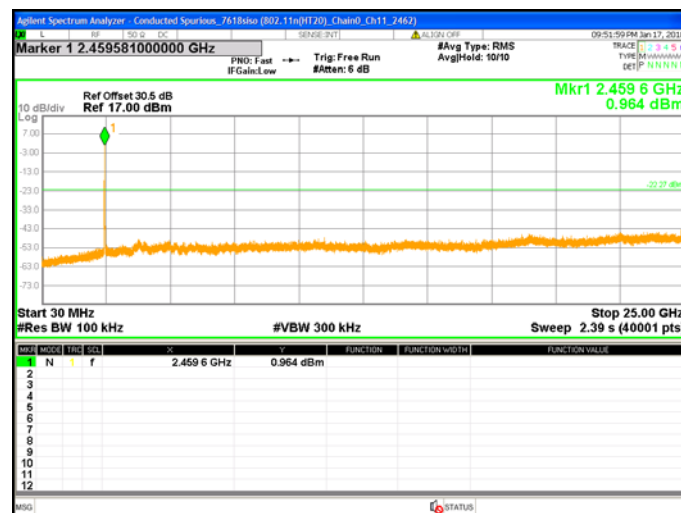


Chain1 : Conducted Spurious @ 802.11n(HT20) Mode Ch 1

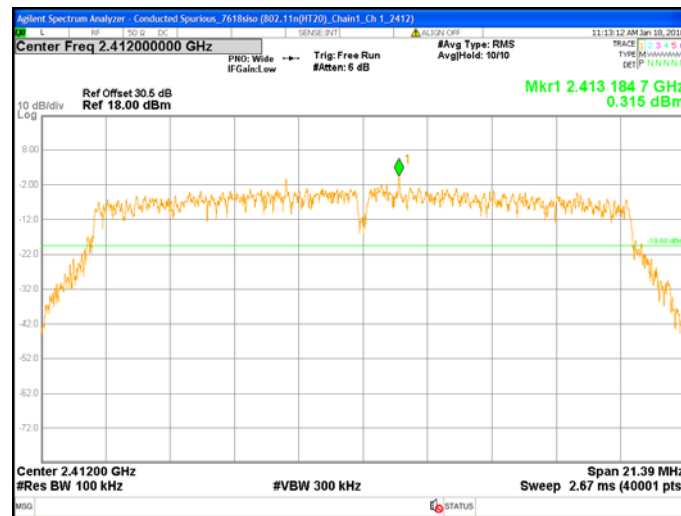


Chain1 : Conducted Spurious @ 802.11n(HT20) Mode Ch 1

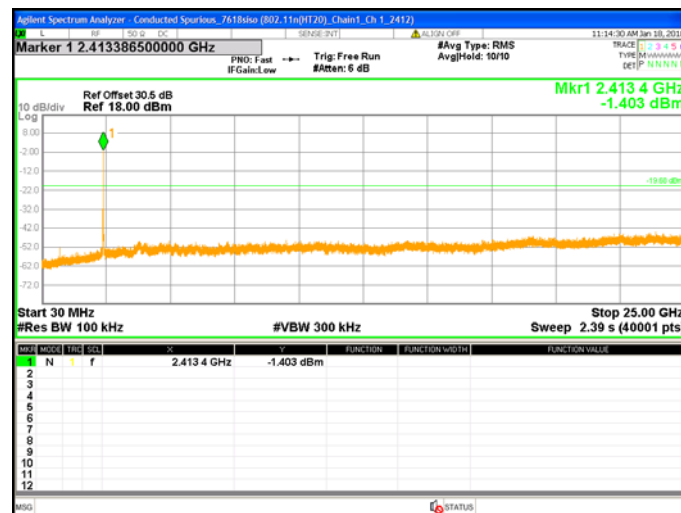


Chain1 : Conducted Spurious @ 802.11n(HT20) Mode Ch 6

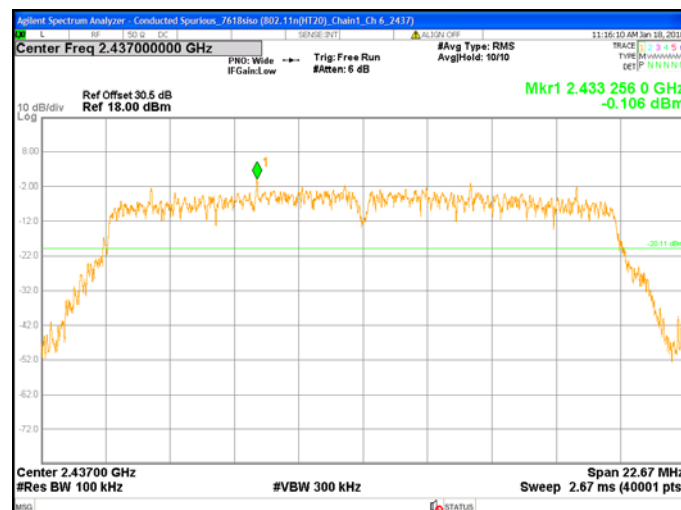


Chain1 : Conducted Spurious @ 802.11n(HT20) Mode Ch 6

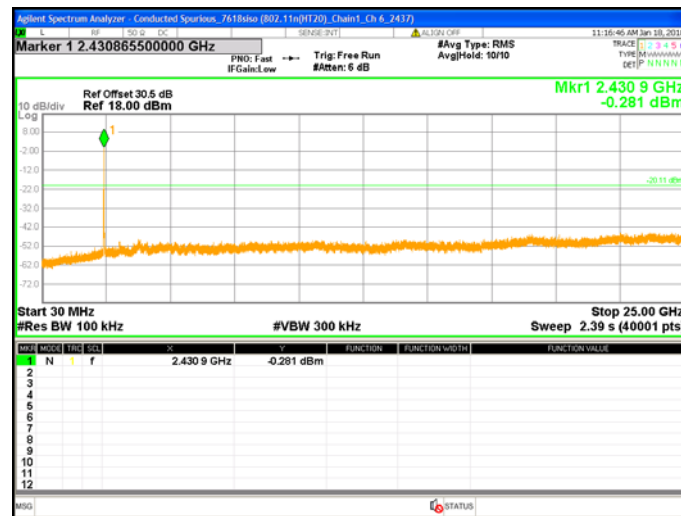


Chain1 : Conducted Spurious @ 802.11n(HT20) Mode Ch11

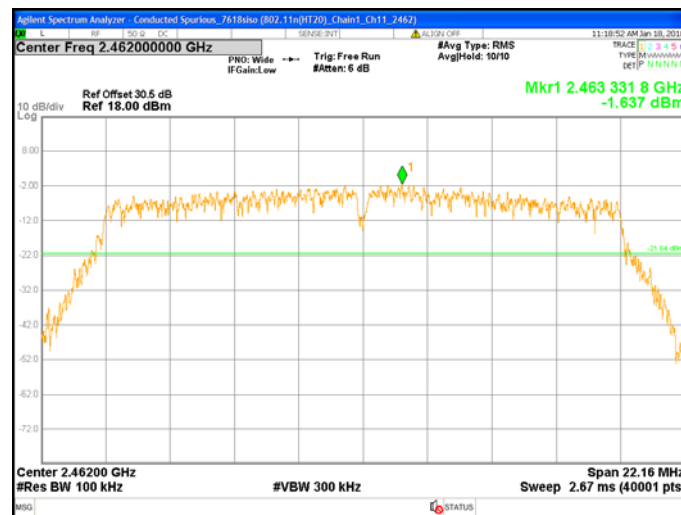


Chain1 : Conducted Spurious @ 802.11n(HT20) Mode Ch11

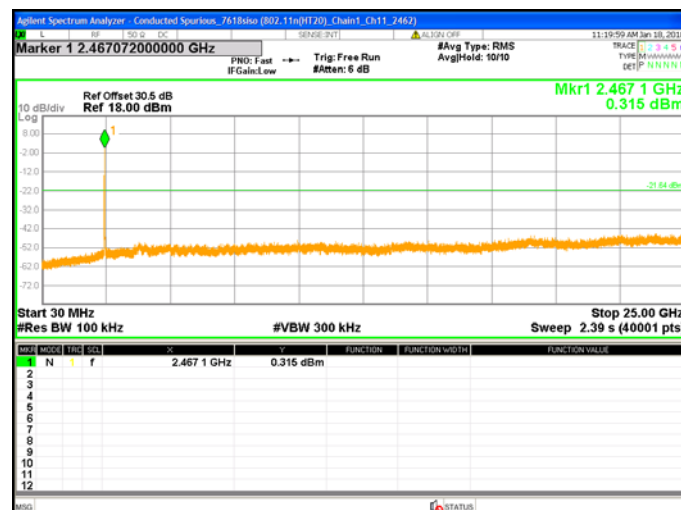


Chain0 : Conducted Spurious @ 802.11n(HT40) Mode Ch 3

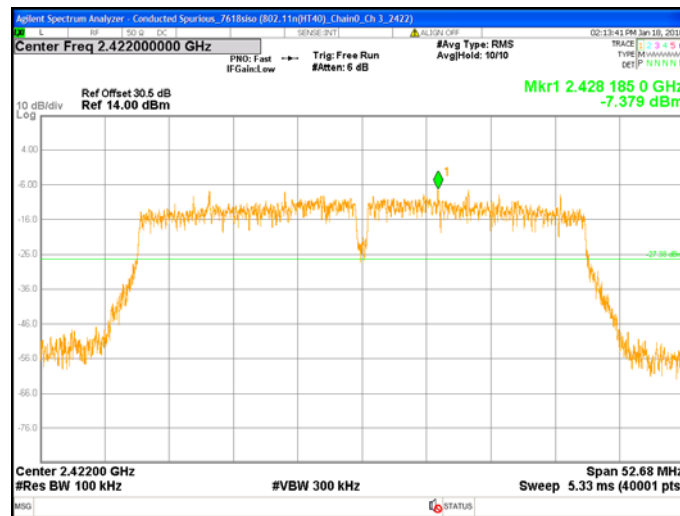


Chain0 : Conducted Spurious @ 802.11n(HT40) Mode Ch 3

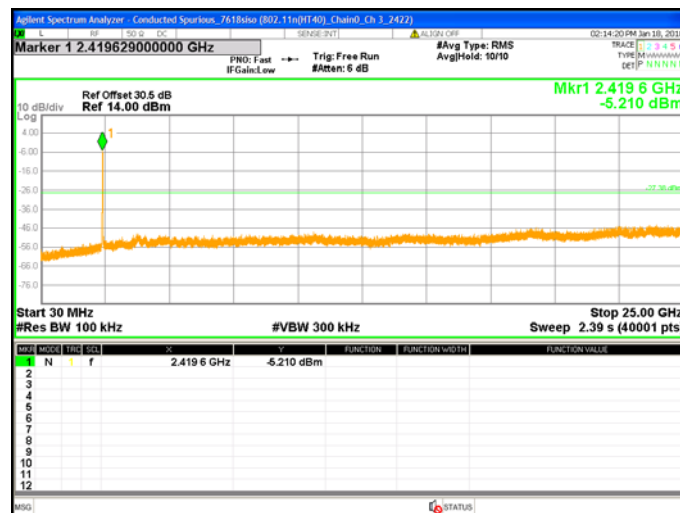


Chain0 : Conducted Spurious @ 802.11n(HT40) Mode Ch 6

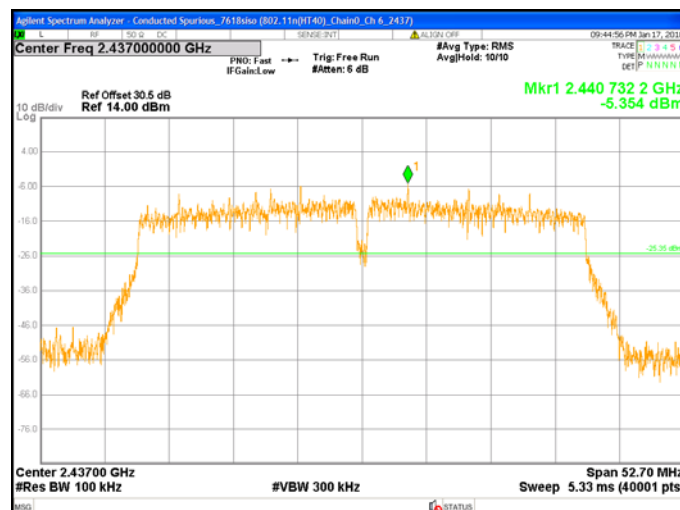


Chain0 : Conducted Spurious @ 802.11n(HT40) Mode Ch 6

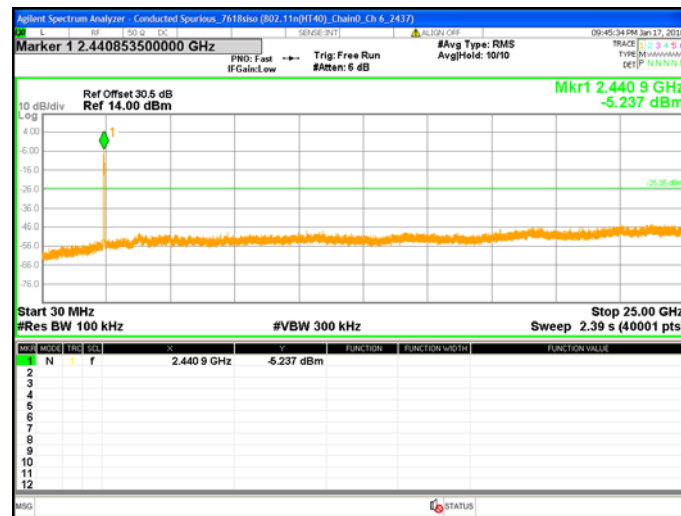


Chain0 : Conducted Spurious @ 802.11n(HT40) Mode Ch 9

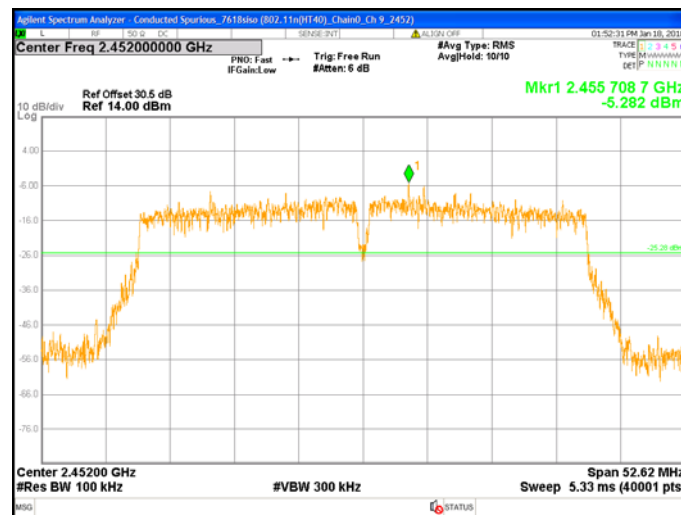


Chain0 : Conducted Spurious @ 802.11n(HT40) Mode Ch 9

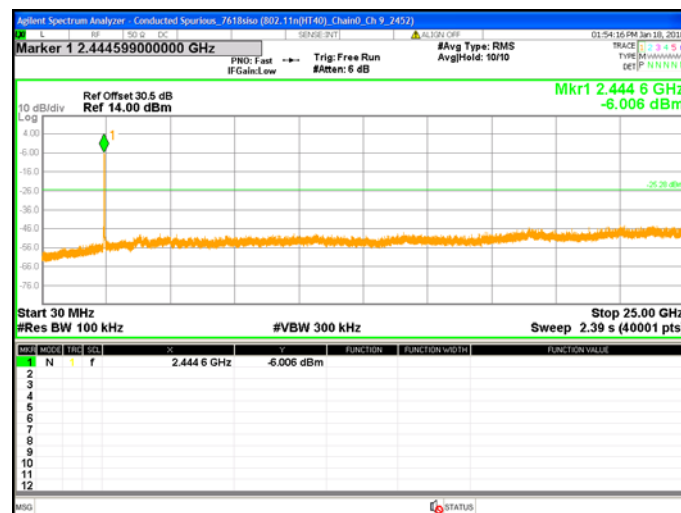


Chain1 : Conducted Spurious @ 802.11n(HT40) Mode Ch 3

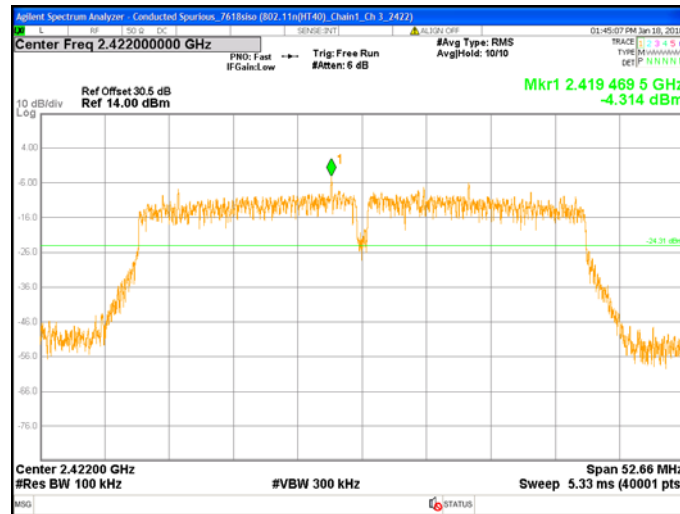


Chain1 : Conducted Spurious @ 802.11n(HT40) Mode Ch 3

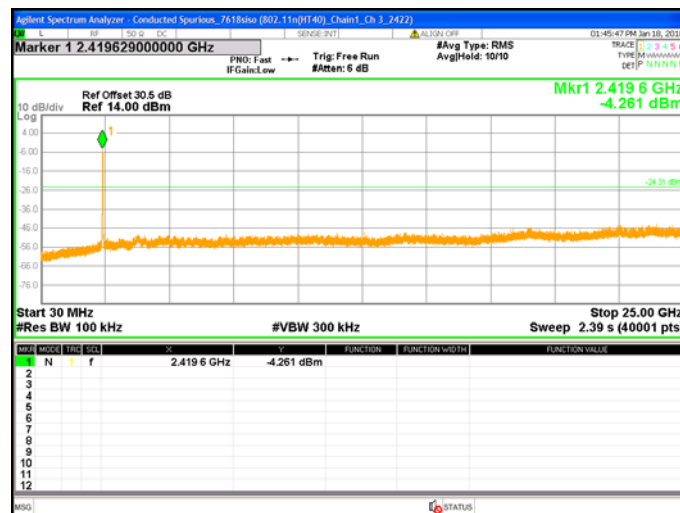


Chain1 : Conducted Spurious @ 802.11n(HT40) Mode Ch 6

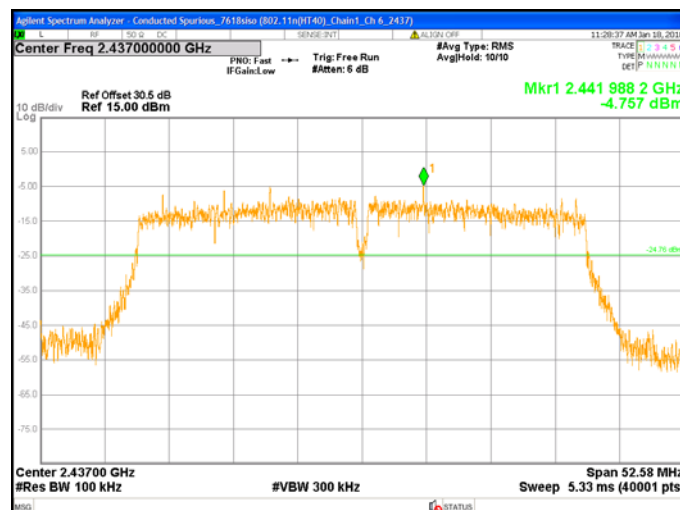


Chain1 : Conducted Spurious @ 802.11n(HT40) Mode Ch 6

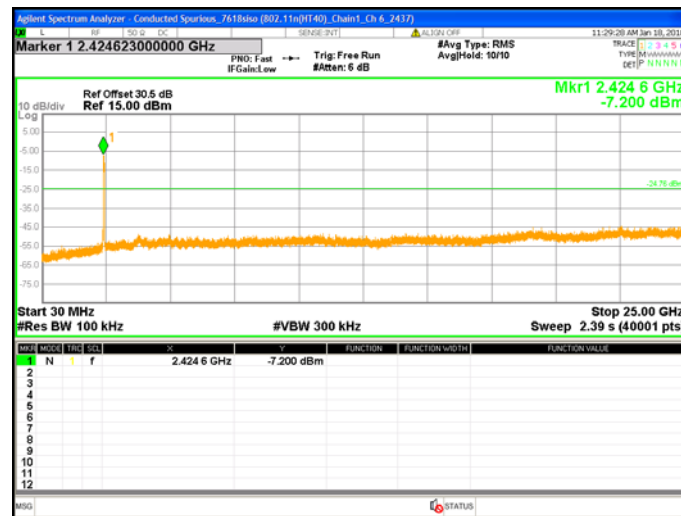

Chain1 : Conducted Spurious @ 802.11n(HT40) Mode Ch 9

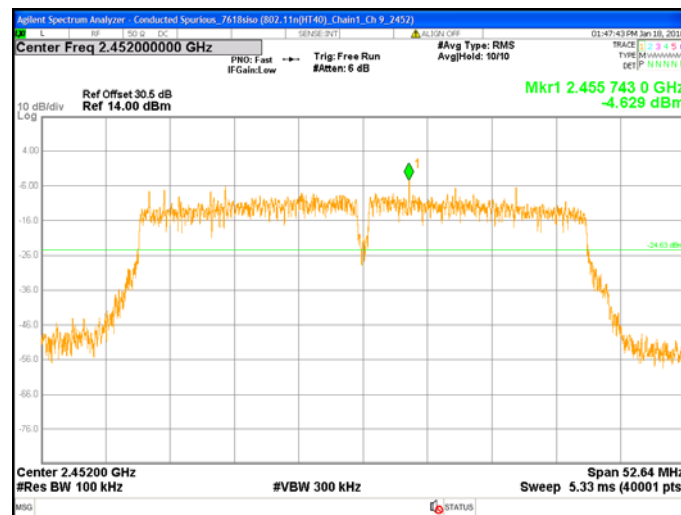


Chain1 : Conducted Spurious @ 802.11n(HT40) Mode Ch 9

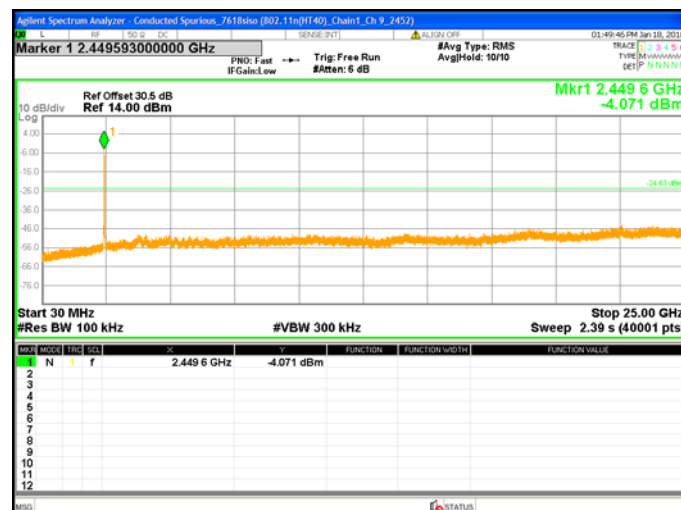


MIMO


Chain0 : Conducted Spurious @ 802.11n(HT20) Mode Ch 1

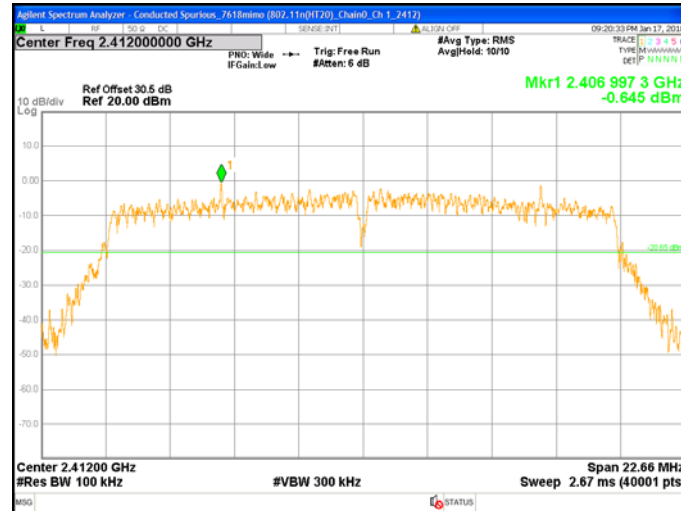


Chain0 : Conducted Spurious @ 802.11n(HT20) Mode Ch 1

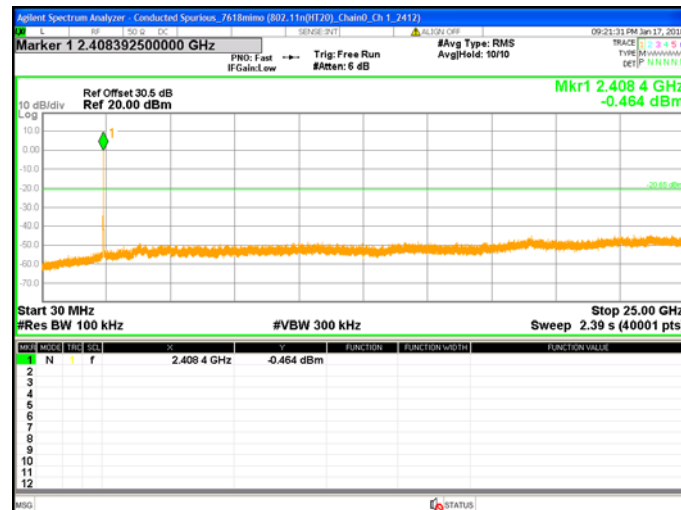


Chain0 : Conducted Spurious @ 802.11n(HT20) Mode Ch 6

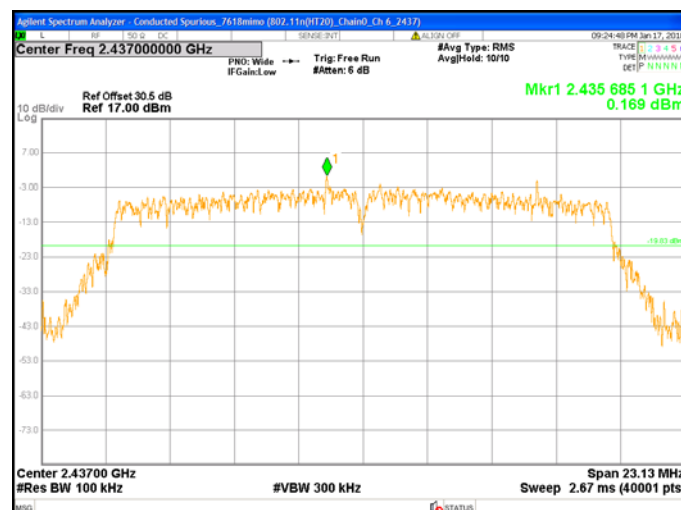


Chain0 : Conducted Spurious @ 802.11n(HT20) Mode Ch 6

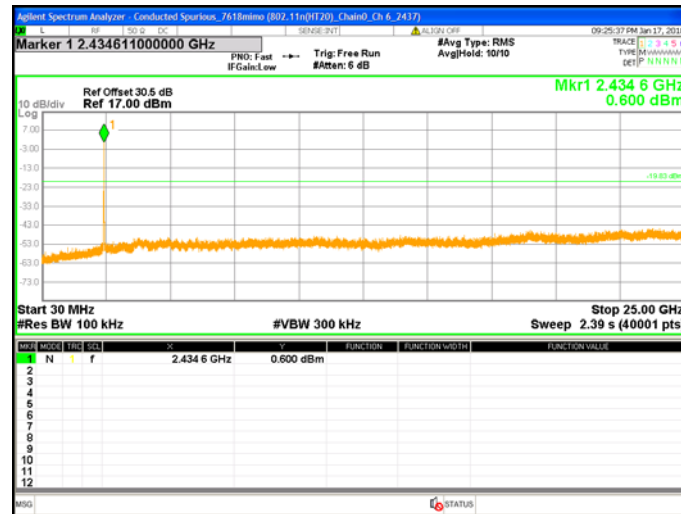


Chain0 : Conducted Spurious @ 802.11n(HT20) Mode Ch11

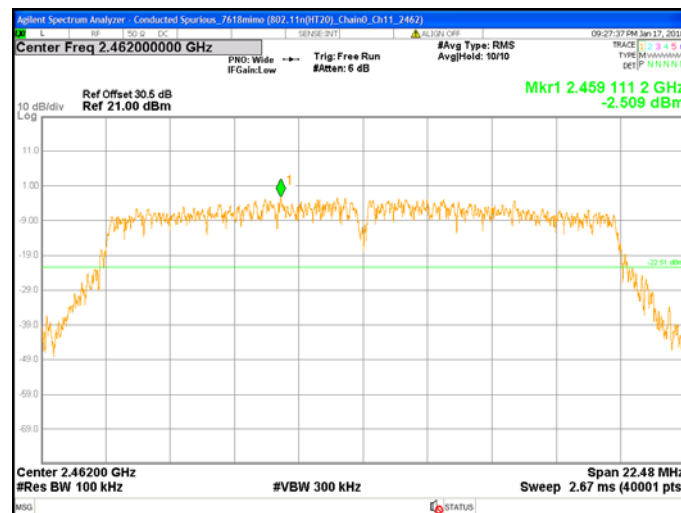


Chain0 : Conducted Spurious @ 802.11n(HT20) Mode Ch11

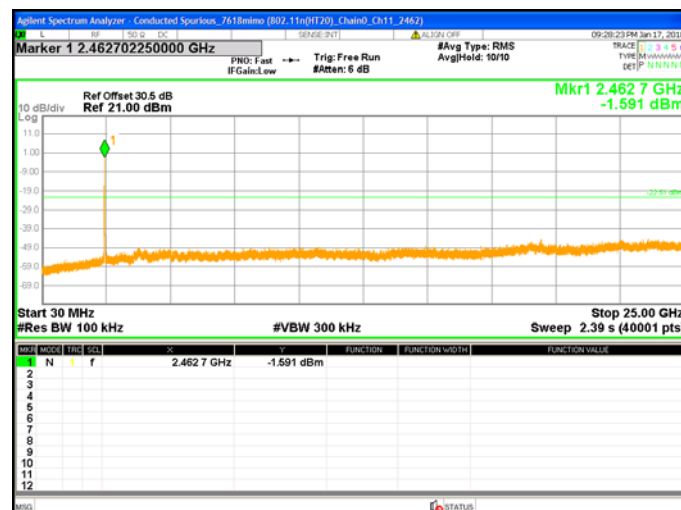


Chain1 : Conducted Spurious @ 802.11n(HT20) Mode Ch 1

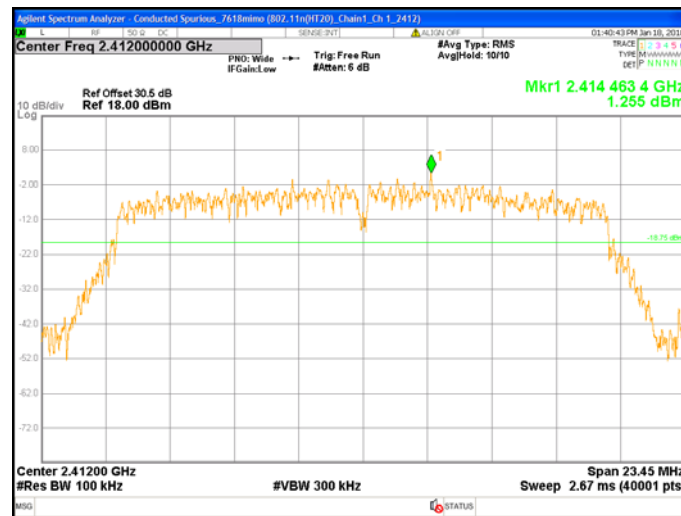


Chain1 : Conducted Spurious @ 802.11n(HT20) Mode Ch 1

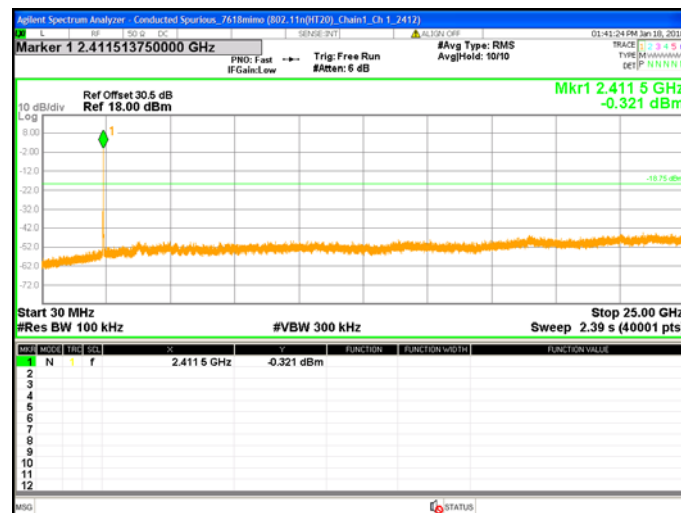


Chain1 : Conducted Spurious @ 802.11n(HT20) Mode Ch 3

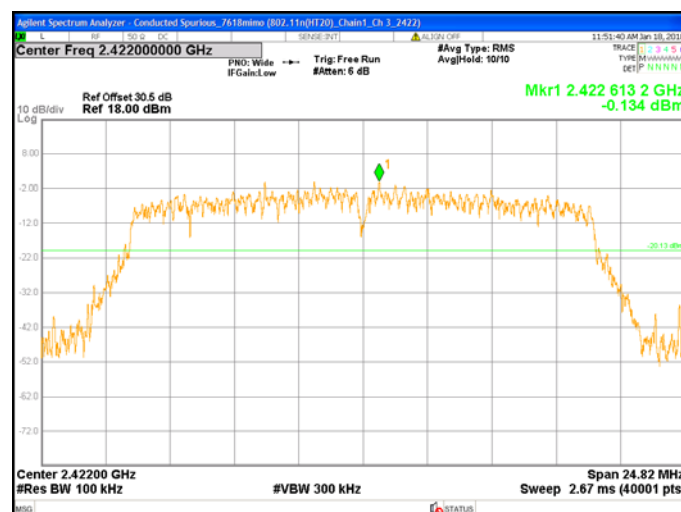

Chain1 : Conducted Spurious @ 802.11n(HT20) Mode Ch 3

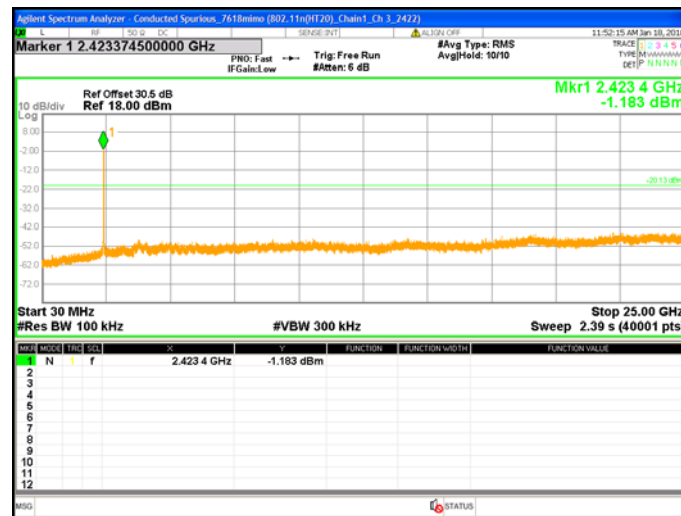

Chain1 : Conducted Spurious @ 802.11n(HT20) Mode Ch 6

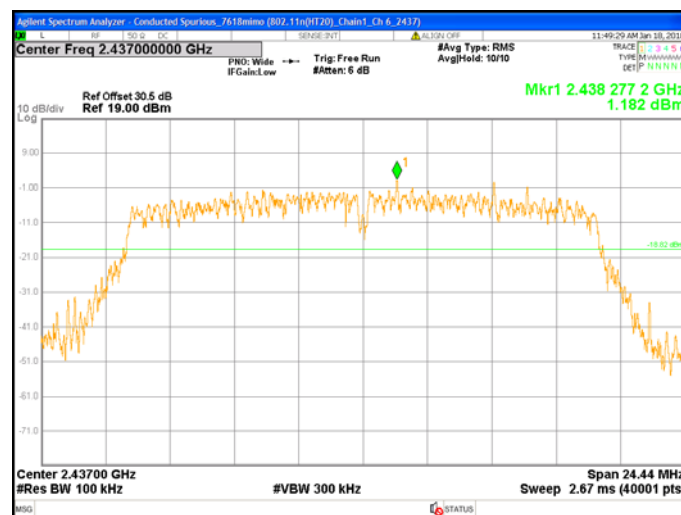

Chain1 : Conducted Spurious @ 802.11n(HT20) Mode Ch 6

