低功率射頻電機技術規範測試報告（5GHz_WLAN）

報告編號.	RT190912E02F-1
申請者	Juniper Networks, Inc.
產品名稱	Wi-Fi & BLE Array AP
型號	AP32, AP32E, AP33
製造廠商	Juniper Networks, Inc.
商標或廠牌	Mist
該產品樣品試驗依據之試驗標準	國家通訊傳播委員會低功率射頻電機技術規範 107 年 1 月 10 日修訂
試驗結果	合格

香港商立德國際商品試驗有限公司桃園分公司新竹實驗室
日期　109 年 7 月 17 日

報告簽署人簽章:



目　　錄

報告發行紀錄 5

1　低功率射頻電機量測記錄表 7

2　一般敘述 9

2.1　待測設備 (WLAN) 9
2.2　輔助測試之週邊設備描述 21
2.3　測試架構圖 22

3　適用規範 24

3.1　規範要求和參考 24
3.2　限制使用之頻帶 28

4　帶外發射之量測 29

4.1　適用標準 29
4.2　量測方法 29
4.3　量測儀器 30
4.4　測試配置 38
4.5　場強度之計算 39
4.6　量測結果 (模式 1) 40
4.6.1　發射諧波 40
4.6.2　接收諧波 124
4.6.3　其它不必要之訊號 126
4.7　量測結果 (模式 2) 128
4.7.1　發射諧波 128
4.7.2　接收諧波 212
4.7.3　其它不必要之訊號 214
4.8　量測結果 (模式 3) 216
4.8.1　發射諧波 216
4.9　量測結果 (模式 4) 300
4.9.1　發射諧波 300
4.10　量測結果 (模式 5) 384
4.10.1 發射諧波 384
4.11　量測結果 (模式 6) 468
4.11.1 發射諧波 468
4.11.2 接收諧波 552
4.11.3 其它不必要之訊號 554
4.12　量測結果 (模式 7) 556
4.12.1 發射諧波 556
4.12.2 接收諧波 640
4.13　量測結果 (模式 8) 642
4.13.1 發射諧波 642
4.14　量測結果 (模式 9) 726
4.14.1 發射諧波 726
4.15　量測結果 (模式 10) 810
4.15.1 發射諧波 810
4.16　量測結果 (模式 11) 894
4.16.1 發射諧波 894
4.16.2 接收諧波 978
4.17　量測結果 (模式 12) 980
4.17.1 發射諧波 980
4.17.2 接收諧波 1064

4.17.3 其它不必要之訊號 1066
4.18 量測結果 (模式 13) 1068
4.18.1 發射諧波 1068
4.19 量測結果 (模式 14) 1152
4.19.1 發射諧波 1152
4.20 量測結果 (模式 15) 1236
4.20.1 發射諧波 1236
4.21 量測結果 (模式 16) 1320
4.21.1 發射諧波 1320
4.21.2 接收諧波 1403
4.21.3 其它不必要之訊號 1405
4.22 量測結果判定 1406
4.23 配置照片 1406

5 電源線傳導干擾之量測 1407

5.1 適用標準 1407
5.2 量測方法 1407
5.3 量測儀器 1407
5.4 測試配置 1409
5.5 干擾值之計算 1409
5.6 量測結果 (模式 1) 1410
5.7 量測結果判定 1411
5.8 配置照片 1411

6 傳導輸出功率量測及發射頻寬之要求 1412

6.1 適用標準 1412
6.2 量測方法 1412
6.3 量測儀器 1413
6.4 測試配置 1413
6.5 量測結果 (模式 1) 1414
6.6 量測結果 (模式 3) 1434
6.7 量測結果 (模式 4) 1453
6.8 量測結果 (模式 5) 1472
6.9 量測結果 (模式 6) 1483
6.10 量測結果判定 1493

7 功率頻譜密度之量測 1494

7.1 適用標準 1494
7.2 量測方法 1494
7.3 量測儀器 1495
7.4 測試配置 1496
7.5 量測結果 (模式 1) 1497
7.6 量測結果 (模式 3) 1506
7.7 量測結果 (模式 4) 1515
7.8 量測結果 (模式 5) 1524
7.9 量測結果 (模式 6) 1531
7.10 量測結果判定 1537

8 6 dB 頻寬之要求 1538

8.1 適用標準 1538
8.2 量測方法 1538
8.3 量測儀器 1538
8.4 測試配置 1538
8.5 量測結果 (模式 1) 1539

8.6 量測結果 (模式 3)..... 1541
8.7 量測結果 (模式 4)..... 1543
8.8 量測結果 (模式 5)..... 1545
8.9 量測結果 (模式 6)..... 1547
8.10 量測結果判定 1548
Annex A- Radiated Out of Band Emission (OOBE) Measurement (For U-NII-3 band)..... 1549
9 檢測實驗室基本資料 1837

報告發行紀錄

Issue No.	Description	Date Issued
RT190912E02F-1	Original release.	109 年 7 月 17 日

證 明 書

產 品 名 稱：	Wi-Fi & BLE Array AP
商 標：	Mist
型 號：	AP32, AP32E, AP33
申 請 者：	Juniper Networks, Inc.
量 測 規 範：	低功率射頻電機技術規範 LP0002 (修訂日期：107 年 1 月 10 日) ANSI C63.10-2013

香港商立德國際商品試驗有限公司桃園分公司在此證明上述待測設備樣品(型號：AP32, AP32E, AP33)，收件日期 108 年 9 月 26 日，於 108 年 10 月 04 日至 109 年 6 月 12 日，已在本公司的標準測試場地完成量測。報告中所描述之測試結果和待測設備的架構組合，均根據樣品實際的量測情況作詳實的記錄。

立德桃園分公司依"**低功率射頻電機技術規範**"、"**低功率電波輻射性電機管理辦法**"及"**電信管制射頻器材審驗辦法**"製作測試結果報告。

特 此 證 明 ！

報告製作者：黃健琳 ，日 期：109 年 7 月 17 日

黃 健 琳 / 專員

審 核 者：陳瓊美 ，日 期：109 年 7 月 17 日

陳 瓊 美 / 經理

香港商立德國際商品試驗有限公司桃園分公司

實驗室地址：300 新竹市科學工業園區力行一路 1 號 E-2

此份報告不得摘錄複製，除全份複製外，需經實驗室書面同意。

1 低功率射頻電機量測記錄表

申請廠商： Juniper Networks, Inc.

製造廠商： Juniper Networks, Inc.

申請廠商地址： 1133 Innovation Way Sunnyvale, CA 94089 USA

廠牌： Mist

產品名稱： Wi-Fi & BLE Array AP

型號： AP32, AP32E, AP33

量測單位名稱： 香港商立德國際商品試驗有限公司桃園分公司 新竹實驗室

量測單位地址： 300 新竹市科學工業園區力行一路 1 號 E-2

量測單位認可編號： TAF 2022

量 測 規 範： 低功率射頻電機技術規範 LP0002 (修訂日期：107 年 1 月 10 日)
ANSI C63.10-2013

WLAN 5.15~5.25GHz頻段概要

項次	量測項目	規　　範	量測結果判定
1	電源線傳導干擾	低功率射頻電機技術規範2.3節	合格
2	帶外發射	低功率射頻電機技術規範4.7.4節	合格
3	最大傳導輸出功率	低功率射頻電機技術規範4.7.3.1節	合格
4	最大功率頻譜密度	低功率射頻電機技術規範4.7.3.1節	合格

WLAN 5.25~5.35GHz頻段概要

項次	量測項目	規　　範	量測結果判定
1	電源線傳導干擾	低功率射頻電機技術規範2.3節	合格
2	帶外發射	低功率射頻電機技術規範4.7.4節	合格
3	最大傳導輸出功率	低功率射頻電機技術規範4.7.3.2節	合格
4	最大功率頻譜密度	低功率射頻電機技術規範4.7.3.2節	合格
5	發射功率控制(TPC)及動態頻率選擇(DFS)	低功率射頻電機技術規範4.7.7.1及4.7.7.2 節	註

註: 此份測試報告未包含發射功率控制(TPC)及動態頻率選擇(DFS)量測項目，請參閱報告號碼：RT190912E02F-1-3

WLAN 5.470~5.725GHz頻段概要

項次	量測項目	規　　範	量測結果判定
1	電源線傳導干擾	低功率射頻電機技術規範2.3節	合格
2	帶外發射	低功率射頻電機技術規範4.7.4節	合格
3	最大傳導輸出功率	低功率射頻電機技術規範4.7.3.2節	合格
4	最大功率頻譜密度	低功率射頻電機技術規範4.7.3.2節	合格
5	發射功率控制(TPC)及動態頻率選擇(DFS)	低功率射頻電機技術規範4.7.7.1及4.7.7.2 節	註

註: 此份測試報告未包含發射功率控制(TPC)及動態頻率選擇(DFS)量測項目，請參閱報告號碼：RT190912E02F-1-3

WLAN 5.725~5.850GHz 頻段概要

項次	量測項目	規　　範	量測結果判定
1	電源線傳導干擾	低功率射頻電機技術規範2.3節	合格
2	帶外發射	低功率射頻電機技術規範4.7.4節	合格
3	最大傳導輸出功率	低功率射頻電機技術規範4.7.3.3節	合格
4	最大功率頻譜密度	低功率射頻電機技術規範4.7.3.3節	合格
5	6dB 頻寬	低功率射頻電機技術規範4.7.5節	合格

最大暴露允許值(Maximum Permissible Exposure，MPE)

項次	量測項目	規　　範	量測結果判定
1	電波暴露量	低功率射頻電機技術規範第 5.20.2 節	註

註:　電波暴露量值，請參照報告編號: RT190912E02F。

備註：量測結果之判定不考慮量測不確定度的貢獻。

2 一般敘述

2.1 待測設備 (WLAN)

產 品 名 稱：	Wi-Fi & BLE Array AP
型 號：	AP32, AP32E, AP33
額 定 電 源：	55Vdc from PoE
調 變 方 式：	CCK, DQPSK, DBPSK for DSSS 64QAM, 16QAM, QPSK, BPSK for OFDM 256QAM for OFDM in 11ac mode and VHT (20/40) mode in 2.4GHz 1024QAM for OFDMA in 11ax HE mode
調 變 技 術：	DSSS, OFDM, OFDMA
傳 輸 速 率：	802.11b: up to 11 Mbps 802.11a/g: up to 54 Mbps 802.11n: up to 600 Mbps 802.11ac: up to 1733.3 Mbps 802.11ax: up to 2401.9 Mbps
載 波 頻 率：	**2.4GHz:** 2.412 ~ 2.462 GHz **5GHz:** 5.18 ~ 5.24 GHz, 5.26 ~ 5.32 GHz, 5.50 ~ 5.72 GHz, 5.745 ~ 5.825 GHz
頻 道 數：	**2.4GHz:** 802.11b, 802.11g, 802.11n (HT20), VHT20, 802.11ax (HE20): 11 802.11n (HT40), VHT40, 802.11ax (HE40): 7 **5GHz:** 802.11a, 802.11n (HT20), 802.11ac (VHT20), 802.11ax (HE20): 25 802.11n (HT40), 802.11ac (VHT40), 802.11ax (HE40): 12 802.11ac (VHT80), 802.11ax (HE80): 6
發 射 功 率：	**CDD Mode:** **For 4TX** **5.18 ~ 5.24 GHz:** 22.88 dBm **5.26 ~ 5.32 GHz:** 19.92 dBm **5.5 ~ 5.72 GHz:** 19.91 dBm **5.745 ~ 5.825 GHz:** 25.95 dBm **For 3TX** **5.18 ~ 5.24 GHz:** 26.28 dBm **5.26 ~ 5.32 GHz:** 22.16 dBm **5.5 ~ 5.72 GHz:** 23.90 dBm **5.745 ~ 5.825 GHz:** 29.01 dBm **For 2TX** **2.412 ~ 2.462 GHz:** 25.37 dBm **5.18 ~ 5.24 GHz:** 25.96 dBm **5.26 ~ 5.32 GHz:** 23.80 dBm **5.5 ~ 5.72 GHz:** 23.88 dBm **5.745 ~ 5.825 GHz:** 27.01 dBm **For 1TX** **2.412 ~ 2.462 GHz:** 24.04 dBm **5.18 ~ 5.24 GHz:** 23.27 dBm **5.26 ~ 5.32 GHz:** 22.81 dBm **5.5 ~ 5.72 GHz:** 22.89 dBm **5.745 ~ 5.825 GHz:** 24.27 dBm

發 射 功 率 :	**Beamforming Mode:** **For 4TX** **5.18 ~ 5.24 GHz:** 19.93 dBm **5.26 ~ 5.32 GHz:** 13.94 dBm **5.5 ~ 5.72 GHz:** 13.96 dBm **5.745 ~ 5.825 GHz:** 19.90 dBm **For 3TX** **5.18 ~ 5.24 GHz:** 25.18 dBm **5.26 ~ 5.32 GHz:** 19.16 dBm **5.5 ~ 5.72 GHz:** 19.19 dBm **5.745 ~ 5.825 GHz:** 25.18 dBm **For 2TX** **2.412 ~ 2.462 GHz:** 23.17 dBm **5.18 ~ 5.24 GHz:** 25.71 dBm **5.26 ~ 5.32 GHz:** 20.86 dBm **5.5 ~ 5.72 GHz:** 20.85 dBm **5.745 ~ 5.825 GHz:** 27.01 dBm **For Scanning Radio** **2.412 ~ 2.462 GHz:** 22.87 dBm **5.18 ~ 5.24 GHz:** 19.39 dBm **5.26 ~ 5.32 GHz:** 19.24 dBm **5.5 ~ 5.72 GHz:** 19.11 dBm **5.745 ~ 5.825 GHz:** 20.47 dBm
天 線 種 類 :	見註
配 件 :	NA

註:

1. 此待測設備, 具有三個型號其差異，詳列如下:

Brand	Model	Difference
Mist	AP32	For marketing request 1) Internal antenna 2) BT with omnidirectional antenna
	AP33	For marketing request 1) Internal antenna 2) BT with directional antenna
	AP32E	For marketing request 1) External antenna 2) BT with omnidirectional antenna
Note: Output power is same for all three models except for the AP32E model collocate new antenna (ATS-OP-245-810-4RPSP-36), and only antenna configurations are different.		

2. 此待測設備同時具有 WLAN 及 Bluetooth 技術，詳列如下:

Radio 1	Radio 2	Radio 3	Radio 4
WLAN - 2.4GHz	(Scanning Radio) WLAN 2.4GHz + 5GHz	WLAN - 5GHz	Bluetooth

3. 同一時間發射條件如下:

Condition	Technology			
1	WLAN - 2.4GHz	(Scanning Radio) WLAN 2.4GHz + 5GHz	WLAN - 5GHz	Bluetooth
Note: The emission of the simultaneous operation has been evaluated and no non-compliance was found.				

4. 此待測設備搭配測試的天線，其資料如下：

Model: AP32						
Antenna No.	Brand	Model	Antenna Net Gain (dBi)	Frequency Range	Antenna Type	Connector Type
Int Dual Ant 3 (WiFi 5G+BT)	-	-	5 6	2.4~2.4835GHz 5.15~5.85GHz	PIFA	Ipex
Int WiFi Dual Ant 1	-	-	4.5 5.4	2.4~2.4835GHz 5.15~5.85GHz	PIFA	Ipex
Int WiFi Dual Ant 0	-	-	4.6 5.7	2.4~2.4835GHz 5.15~5.85GHz	PIFA	Ipex
Int WiFi 5G Ant 2	-	-	5.8	5.15~5.85GHz	PIFA	Ipex
Scanning Ant	-	-	5 6	2.4~2.4835GHz 5.15~5.85GHz	PIFA	Ipex
Model: AP32E						
Antenna No.	Brand	Model	Antenna Net Gain (dBi)	Frequency Range	Antenna Type	Connector Type
Int Scanning Ant	-	-	5 6	2.4~2.4835GHz (Scanning) 5.15~5.85GHz (Scanning)	PIFA	Ipex
Int BT Ant	-	-	5	2.4~2.4835GHz	PIFA	Ipex
Ant. Set 1						
Antenna No.	Brand	Model	Antenna Net Gain (dBi)	Frequency Range	Antenna Type	Connector Type
Ext WiFi Dual Ant (2.4+5G)	AccelTex	ATS-OO-245-46-6RPSP-36	4 6	2.4~2.4835GHz 5.15~5.85GHz	omnidirectional	RPSMA Plug
Ext WiFi Dual Ant (2.4+5G)			4 6	2.4~2.4835GHz 5.15~5.85GHz	omnidirectional	RPSMA Plug
Ext WiFi Dual Ant (5G)			4 6	2.4~2.4835GHz 5.15~5.85GHz	omnidirectional	RPSMA Plug
Ext WiFi Dual Ant (5G)			4 6	2.4~2.4835GHz 5.15~5.85GHz	omnidirectional	RPSMA Plug
Ext WiFi Dual Ant (Scanning)			4 6	2.4~2.4835GHz (Scanning) 5.15~5.85GHz (Scanning)	omnidirectional	RPSMA Plug
Ant. Set 2						
Antenna No.	Brand	Model	Antenna Net Gain (dBi)	Frequency Range	Antenna Type	Connector Type
Ext WiFi PATCH Ant (2.4+5G)	AccelTex	ATS-OP-245-810-4RPSP-36	8 10	2.4~2.4835GHz 5.15~5.85GHz	PATCH	RPSMA Plug
Ext WiFi PATCH Ant (2.4+5G)			8 10	2.4~2.4835GHz 5.15~5.85GHz	PATCH	RPSMA Plug
Ext WiFi PATCH Ant (5G)			8 10	2.4~2.4835GHz 5.15~5.85GHz	PATCH	RPSMA Plug
Ext WiFi PATCH Ant (5G)			8 10	2.4~2.4835GHz 5.15~5.85GHz	PATCH	RPSMA Plug

Model: AP33						
Antenna No.	Brand	Model	Antenna Net Gain (dBi)	Frequency Range	Antenna Type	Connector Type
Int WiFi Dual Ant 0	-	-	3.7 6	2.4~2.4835GHz 5.15~5.85GHz	PIFA	Ipex
Int WiFi Dual Ant 1	-	-	4.6 6	2.4~2.4835GHz 5.15~5.85GHz	PIFA	Ipex
Int WiFi 5G Ant 2	-	-	6	5.15~5.85GHz	PIFA	Ipex
Int WiFi 5G Ant 3	-	-	5.9	5.15~5.85GHz	PIFA	Ipex
Scanning Ant	-	-	5 6	2.4~2.4835GHz 5.15~5.85GHz	PIFA	Ipex
BT Slot_Direct Antenna	-	-	6	2.402~2.480GHz	Slot_Direct	Ipex
BT Array Antenna	-	-	Beam 1 :3.9 Beam 2 :3.9 Beam 3 :4.7 Beam 4 :4.4 Beam 5 :4.8 Beam 6 :5.1 Beam 7 :5.1 Beam 8 :4.2	2.402~2.480GHz	Array Antenna	Ipex

5. 上述天線的規格資訊由申請者聲明，實驗室不承擔任何責任。

6. 此待測物之技術的種類為4TX / 4RX之組合。

MODULATION MODE	Radio 1 - 2.4GHz Band TX & RX CONFIGURATION		Radio 2 - 2.4GHz Band TX & RX CONFIGURATION	
802.11b	2TX	2RX	1TX	1RX
802.11g	2TX	2RX	1TX	1RX
802.11n (HT20)	2TX	2RX	1TX	1RX
802.11n (HT40)	2TX	2RX	1TX	1RX
VHT20	2TX	2RX	1TX	1RX
VHT40	2TX	2RX	1TX	1RX
802.11ax (HE20)	2TX	2RX	1TX	1RX
802.11ax (HE40)	2TX	2RX	1TX	1RX
MODULATION MODE	**Radio 3 - 5GHz Band** **TX & RX CONFIGURATION**		**Radio 2 - 5GHz Band** **TX & RX CONFIGURATION**	
802.11a	4TX	4RX	1TX	1RX
802.11n (HT20)	4TX	4RX	1TX	1RX
802.11n (HT40)	4TX	4RX	1TX	1RX
802.11ac (VHT20)	4TX	4RX	1TX	1RX
802.11ac (VHT40)	4TX	4RX	1TX	1RX
802.11ac (VHT80)	4TX	4RX	1TX	1RX
802.11ax (HE20)	4TX	4RX	1TX	1RX
802.11ax (HE40)	4TX	4RX	1TX	1RX
802.11ax (HE80)	4TX	4RX	1TX	1RX

Note:
1. All of modulation mode support beamforming function except 802.11a/b/g modulation mode.
2. The EUT support Beamforming and CDD mode, therefore both mode were investigated and the worst case scenario was identified. The worst case data were presented in test report.
3. The modulation and bandwidth are similar for 802.11n mode for 20MHz (40MHz), 802.11ac mode for 20MHz (40MHz, 80MHz) and 802.11ax mode for 20MHz (40MHz, 80MHz), therefore the manufacturer will control the power for 802.11n/ac mode is the same as the 802.11ax or more lower than it and investigated worst case to representative mode in test report.

7. 此待測設備於輻射場強量測項目,以下列模式進行評估:

➢ **Radiated Emission (Above 1GHz) test**

EUT Model No.: AP32				
Pre-test Mode	Test item	Mode	Polarity	Remark
1	RSE above 1GHz	Scanning Radio	X-Y	-
2	**RSE above 1GHz**	**Scanning Radio**	**X-Z**	**Worst-Test Results Mode 11**
3	RSE above 1GHz	Scanning Radio	Y-Z	-

EUT Model No.: AP32E					
Pre-test Mode	Test item	Mode	Polarity (with Ant. Set 1)	Transmitter Chain	Remark
1	**RSE above 1GHz**	**1TX**	**Y-Z**	**0**	**Worst-Test Results Mode 5**
2	RSE above 1GHz	1TX	Y-Z	1	-
3	RSE above 1GHz	1TX	Y-Z	2	-
4	RSE above 1GHz	1TX	Y-Z	3	-
5	RSE above 1GHz	1TX	X-Y	0	-
6	RSE above 1GHz	1TX	X-Z	0	-
7	RSE above 1GHz	2TX	Y-Z	0+1	-
8	**RSE above 1GHz**	**2TX**	**Y-Z**	**0+2**	**Worst-Test Results Mode 4**
9	RSE above 1GHz	2TX	Y-Z	0+3	-
10	RSE above 1GHz	2TX	Y-Z	1+2	-
11	RSE above 1GHz	2TX	Y-Z	1+3	-
12	RSE above 1GHz	2TX	Y-Z	2+3	-
13	RSE above 1GHz	2TX	X-Z	0+2	-
14	RSE above 1GHz	2TX	Y-Z	0+2	-
15	RSE above 1GHz	3TX	X-Z	0+1+2	-
16	RSE above 1GHz	3TX	X-Z	0+1+3	-
17	RSE above 1GHz	3TX	X-Y	0+2+3	-
18	RSE above 1GHz	3TX	X-Z	1+2+3	-
19	RSE above 1GHz	3TX	X-Z	0+1+2	-
20	**RSE above 1GHz**	**3TX**	**Y-Z**	**0+1+2**	**Worst-Test Results Mode 3**
21	RSE above 1GHz	4TX	X-Y	0+1+2+3	-
22	RSE above 1GHz	4TX	X-Z	0+1+2+3	-
23	**RSE above 1GHz**	**4TX**	**Y-Z**	**0+1+2+3**	**Worst-Test Results Mode 2**
24	**RSE above 1GHz**	**Scanning Radio**	**X-Y**	**-**	**Worst-Test Results Mode 6**
25	RSE above 1GHz	Scanning Radio	X-Z	**-**	-
26	RSE above 1GHz	Scanning Radio	Y-Z	**-**	-
Pre-test Mode	Test item	Mode	Ant. Polarity (with Ant. Set 2)	Transmitter Chain	Remark
27	RSE above 1GHz	4TX	Y-Z	0+1+2+3	-
28	**RSE above 1GHz**	**4TX**	**X-Z**	**0+1+2+3**	**Worst-Test Results Mode 1**

EUT Model No.: AP33					
Pre-test Mode	Test item	Mode	Polarity	Transmitter Chain	Remark
1	RSE above 1GHz	1TX	X-Y	0	-
2	RSE above 1GHz	1TX	X-Y	1	-
3	RSE above 1GHz	1TX	X-Y	2	-
4	RSE above 1GHz	1TX	X-Y	3	-
5	**RSE above 1GHz**	**1TX**	**X-Z**	**1**	**Worst-Test Results Mode 15**
6	RSE above 1GHz	1TX	Y-Z	1	-
7	RSE above 1GHz	2TX	X-Y	0+1	-
8	RSE above 1GHz	2TX	X-Y	0+2	-
9	RSE above 1GHz	2TX	X-Y	0+3	-
10	RSE above 1GHz	2TX	X-Y	1+2	-
11	RSE above 1GHz	2TX	X-Y	1+3	-
12	RSE above 1GHz	2TX	X-Y	2+3	-
13	RSE above 1GHz	2TX	X-Z	2+3	-
14	**RSE above 1GHz**	**2TX**	**Y-Z**	**2+3**	**Worst-Test Results Mode 14**
15	RSE above 1GHz	3TX	X-Y	0+1+2	-
16	RSE above 1GHz	3TX	X-Y	0+1+3	-
17	RSE above 1GHz	3TX	X-Y	0+2+3	-
18	RSE above 1GHz	3TX	X-Y	1+2+3	-
19	RSE above 1GHz	3TX	X-Z	0+2+3	-
20	**RSE above 1GHz**	**3TX**	**Y-Z**	**0+2+3**	**Worst-Test Results Mode 13**
21	RSE above 1GHz	4TX	X-Y	0+1+2+3	-
22	**RSE above 1GHz**	**4TX**	**X-Z**	**0+1+2+3**	**Worst-Test Results Mode 12**
23	RSE above 1GHz	4TX	Y-Z	0+1+2+3	-
24	**RSE above 1GHz**	**Scanning Radio**	**X-Y**	**-**	**Worst-Test Results Mode 16**
25	RSE above 1GHz	Scanning Radio	X-Z	-	-
26	RSE above 1GHz	Scanning Radio	Y-Z	-	-

➢ **For Radiated Emission (Below 1GHz) test**

Pre-test Mode	Test item	Model No.	Polarity	Remark
1	**RSE below 1GHz**	**AP33**	**X-Z**	**Worst-Test Results Mode 12**
2	RSE below 1GHz	AP32	X-Z	-
3	RSE below 1GHz	AP33	X-Y	-
4	RSE below 1GHz	AP33	Y-Z	-
5	RSE below 1GHz	AP32E	X-Y (with Ant. Set 1)	-
6	RSE below 1GHz	AP32E	X-Z (with Ant. Set 1)	-
7	**RSE below 1GHz**	**AP32E**	**Y-Z (with Ant. Set 1)**	**Worst-Test Results Mode 2**
8	RSE below 1GHz	AP32E	Y-Z (with Ant. Set 2)	-
9	**RSE below 1GHz**	**AP32E**	**X-Z (with Ant. Set 2)**	**Worst-Test Results Mode 1**

➢ **For AC Power Conducted Emission test**

Pre-test Mode	Test item	Model No.	Remark
1	AC Power Conducted	AP32	-
2	AC Power Conducted	AP33	-
3	AC Power Conducted	AP32E (with Ant. Set 1)	-
4	**AC Power Conducted**	**AP32E (with Ant. Set 2)**	**Worst-Test Results Mode 1**

8. 此報告中，最終測試模式如下:

Mode	Test item	Model No.	Remark
1	帶外發射(above 1GHz); 接收諧波; 帶外發射(below 1GHz); 電源線傳導干擾; 最大傳導輸出功率; 最大功率頻譜密度; 6dB 頻寬	AP32E (with Ant. Set 2)	4TX
2	帶外發射(above 1GHz); 接收諧波; 帶外發射(below 1GHz);	AP32E (with Ant. Set 1)	4TX
3	帶外發射(above 1GHz); 最大傳導輸出功率; 最大功率頻譜密度; 6dB 頻寬	AP32E (with Ant. Set 1)	3TX
4	帶外發射(above 1GHz); 最大傳導輸出功率; 最大功率頻譜密度; 6dB 頻寬	AP32E (with Ant. Set 1)	2TX
5	帶外發射(above 1GHz); 最大傳導輸出功率; 最大功率頻譜密度; 6dB 頻寬	AP32E (with Ant. Set 1)	1TX
6	帶外發射(above 1GHz); 接收諧波; 帶外發射(below 1GHz) 最大傳導輸出功率; 最大功率頻譜密度; 6dB 頻寬	AP32E	SC Radio
7	帶外發射(above 1GHz); 接收諧波	AP32	4TX
8	帶外發射(above 1GHz)	AP32	3TX
9	帶外發射(above 1GHz)	AP32	2TX
10	帶外發射(above 1GHz)	AP32	1TX
11	帶外發射(above 1GHz); 接收諧波;	AP32	SC Radio
12	帶外發射(above 1GHz); 接收諧波; 帶外發射(below 1GHz)	AP33	4TX
13	帶外發射(above 1GHz)	AP33	3TX
14	帶外發射(above 1GHz)	AP33	2TX
15	帶外發射(above 1GHz)	AP33	1TX
16	帶外發射(above 1GHz); 接收諧波; 帶外發射(below 1GHz)	AP33	SC Radio

Note:
1. The max. antenna gain was selected for the final test of Antenna Port Conducted test items.
2. PATCH antenna only support 4TX for 5GHz band.

9. 此報告中，場強輻射量測經過評估後以下列測試模式進行最終量測。

量測項目	發射	接收
1GHz 以上量測	802.11a: Ch 36, 40, 48, 52, 60, 64, 100, 116, 140, 144, 149, 157, 165 802.11ac (VHT20): Ch 36, 40, 48, 52, 60, 64, 100, 116, 140, 144, 149, 157, 165 (僅針對峰值傳導輸出功率) 802.11ac (VHT40): Ch 38, 46, 54, 62, 102, 110, 134, 142, 151, 159 (僅針對峰值傳導輸出功率) 802.11ac (VHT80): Ch 42, 58, 106, 122, 138, 155 (僅針對峰值傳導輸出功率) 802.11ax (HE20): Ch 36, 40, 48, 52, 60, 64, 100, 116, 140, 144, 149, 157, 165 802.11ax (HE40): Ch 38, 46, 54, 62, 102, 110, 134, 142, 151, 159 802.11ax (HE80): Ch 42, 58, 106, 122, 138, 155	Ch 149
其它不必要之訊號	802.11ax (HE20): Ch 149 (模式 1) 802.11ax (HE40): Ch 159 (模式 2, 6, 12, 16)	Ch 149 (模式 1) Ch 159 (模式 2, 6, 12, 16)
*電源線傳導干擾量測經過評估後，5GHz頻段之以802.11ax (HE20): Ch 149測試模式進行最終量測。		


10. Duty cycle of test signal

For Radio 2


If duty cycle of test signal is ≥ 98 %, duty factor is not required.
If duty cycle of test signal is < 98%, duty factor shall be considered.

802.11a: Duty cycle = 2.062 ms/2.096 ms = 0.984
802.11ax (HE20): Duty cycle = 1.486 ms/1.52 ms = 0.978, Duty factor = 10 * log (1/Duty cycle) = 0.10
802.11ax (HE40): Duty cycle = 1.186 ms/1.22 ms = 0.972, Duty factor = 10 * log (1/Duty cycle) = 0.12
802.11ax (HE80): Duty cycle = 0.399 ms/0.434 ms = 0.919, Duty factor = 10 * log (1/Duty cycle) = 0.37


802.11a

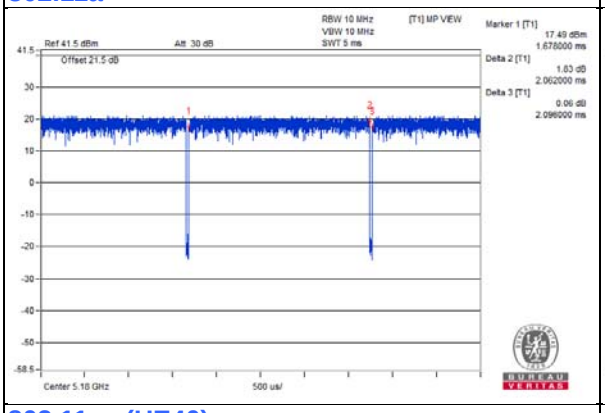


802.11ax (HE20)

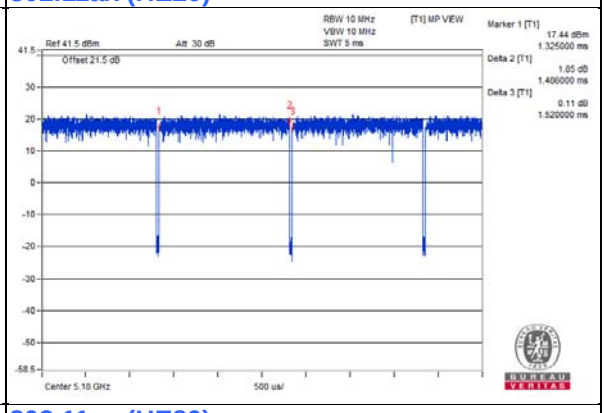

802.11ax (HE40)

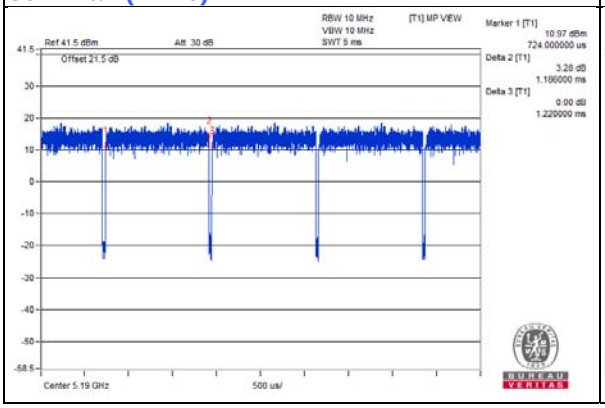

802.11ax (HE80)

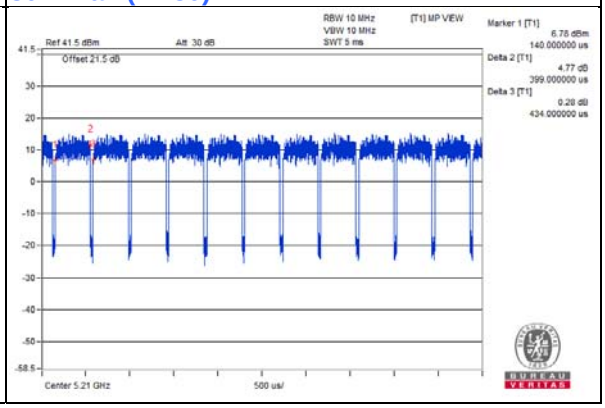


For Radio 3


If duty cycle of test signal is ≥ 98 %, duty factor is not required.
If duty cycle of test signal is < 98%, duty factor shall be considered.

802.11a: Duty cycle = 2.063 ms/2.095 ms = 0.985
802.11ax (HE20): Duty cycle = 1.488 ms/1.521 ms = 0.978, Duty factor = 10 * log (1/Duty cycle) = 0.10
802.11ax (HE40): Duty cycle = 0.771 ms/0.811 ms = 0.951, Duty factor = 10 * log (1/Duty cycle) = 0.22
802.11ax (HE80): Duty cycle = 0.399 ms/0.433 ms = 0.921, Duty factor = 10 * log (1/Duty cycle) = 0.36


802.11a

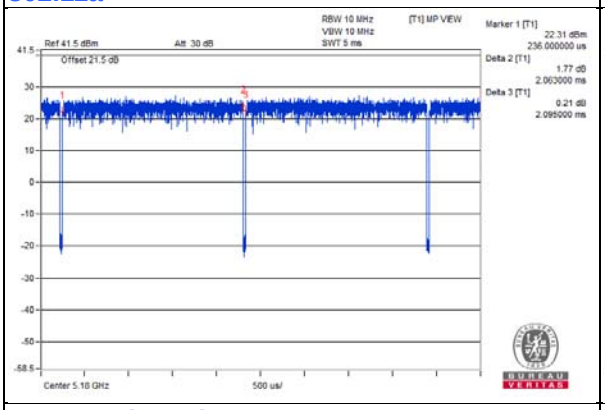


802.11ax (HE20)

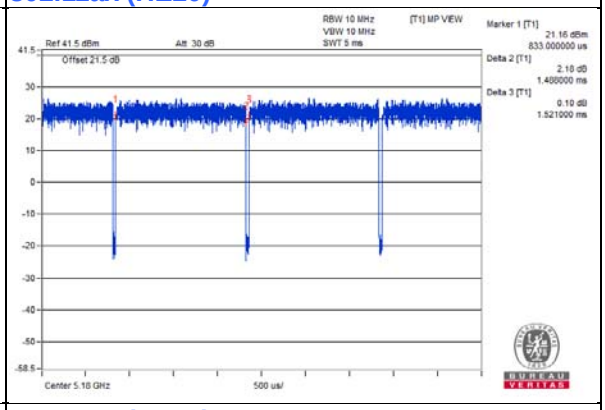

802.11ax (HE40)

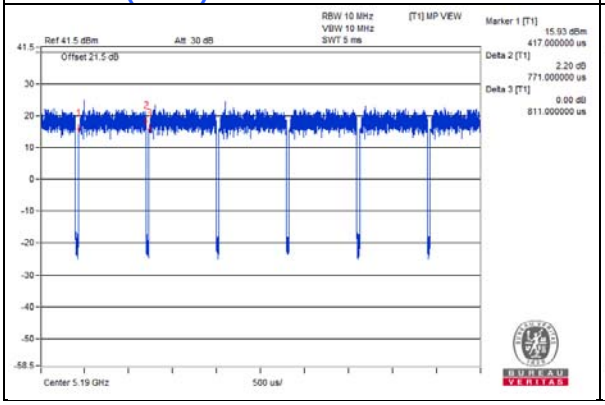

802.11ax (HE80)

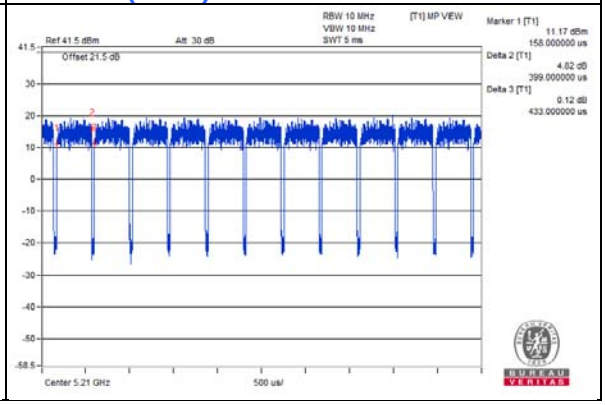

此裝置各頻道的中心頻率如下：

802.11a, 802.11n (HT20), 802.11ac (VHT20), 802.11ax (HE20):

頻道	對應頻率 (MHz)	頻道	對應頻率 (MHz)
36	5180	120	5600
40	5200	124	5620
44	5220	128	5640
48	5240	132	5660
52	5260	136	5680
56	5280	140	5700
60	5300	144	5720
64	5320	149	5745
100	5500	153	5765
104	5520	157	5785
108	5540	161	5805
112	5560	165	5825
116	5580		

802.11n (HT40), 802.11ac (VHT40), 802.11ax (HE40):

頻道	對應頻率 (MHz)	頻道	對應頻率 (MHz)
38	5190	118	5590
46	5230	126	5630
54	5270	134	5670
62	5310	142	5710
102	5510	151	5755
110	5550	159	5795

802.11ac (VHT80), 802.11ax (HE80):

頻道	對應頻率 (MHz)	頻道	對應頻率 (MHz)
42	5210	138	5690
58	5290	122	5610
106	5530	155	5775

詳細之規格請參考使用說明書，產品的照片請參照 BV 編號: 200623E01-2。

2.2 輔助測試之週邊設備描述

待測設備於受測時均接上其所屬的配件或一般用途之相關設備；下列輔助設備或配件測試中所使用的配備，以形成一個代表待測物實際運作的受測系統。

ID	Product	Brand	Model No.	Serial No.	FCC ID	Remarks
A.	Laptop	DELL	E5430	HYV4VY1	FCC DoC	Provided by Lab
B.	Laptop	DELL	E6420	B92T3R1	FCC DoC	Provided by Lab
C.	PoE Adapter	Microsemi	PD-9001GR/AC	NA	NA	Supplied by client
D.	IPod	Apple	MC749TA/A	CC4DN25WDFDM	NA	Provided by Lab

Note:


1. All power cords of the above support units are non-shielded (1.8m).

ID	Descriptions	Qty.	Length (m)	Shielding (Yes/No)	Cores (Qty.)	Remarks
1.	RJ-45 Cable	1	10	No	0	Provided by Lab (Brand: Tatung, Model: E210587)
2.	RJ-45 Cable	1	10	No	0	Provided by Lab (Brand: Tatung, Model: E210587)
3.	RJ-45 Cable	1	1.5	No	0	Provided by Lab (Brand: AWM, Model: E329905)
4.	USB Cable	1	0.1	Yes	0	Provided by Lab (Brand: Apple, Model: NA)


註： 本案經申請者切結器材不提供隨貨配件，配件由實驗室(或申請者)提供併同檢驗。

2.3 測試架構圖

For Conducted Emission Test:

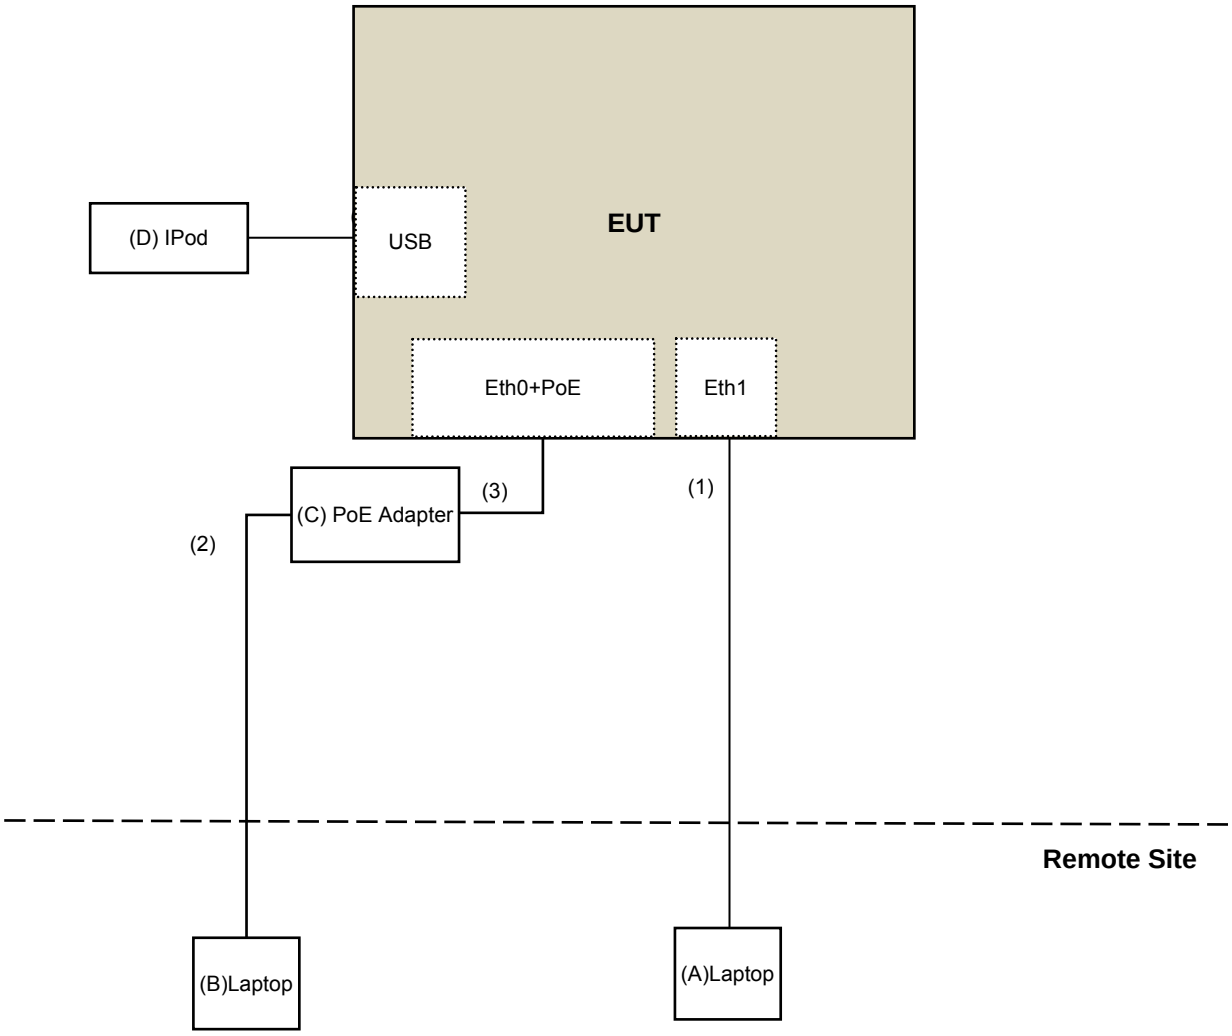

For other test items:

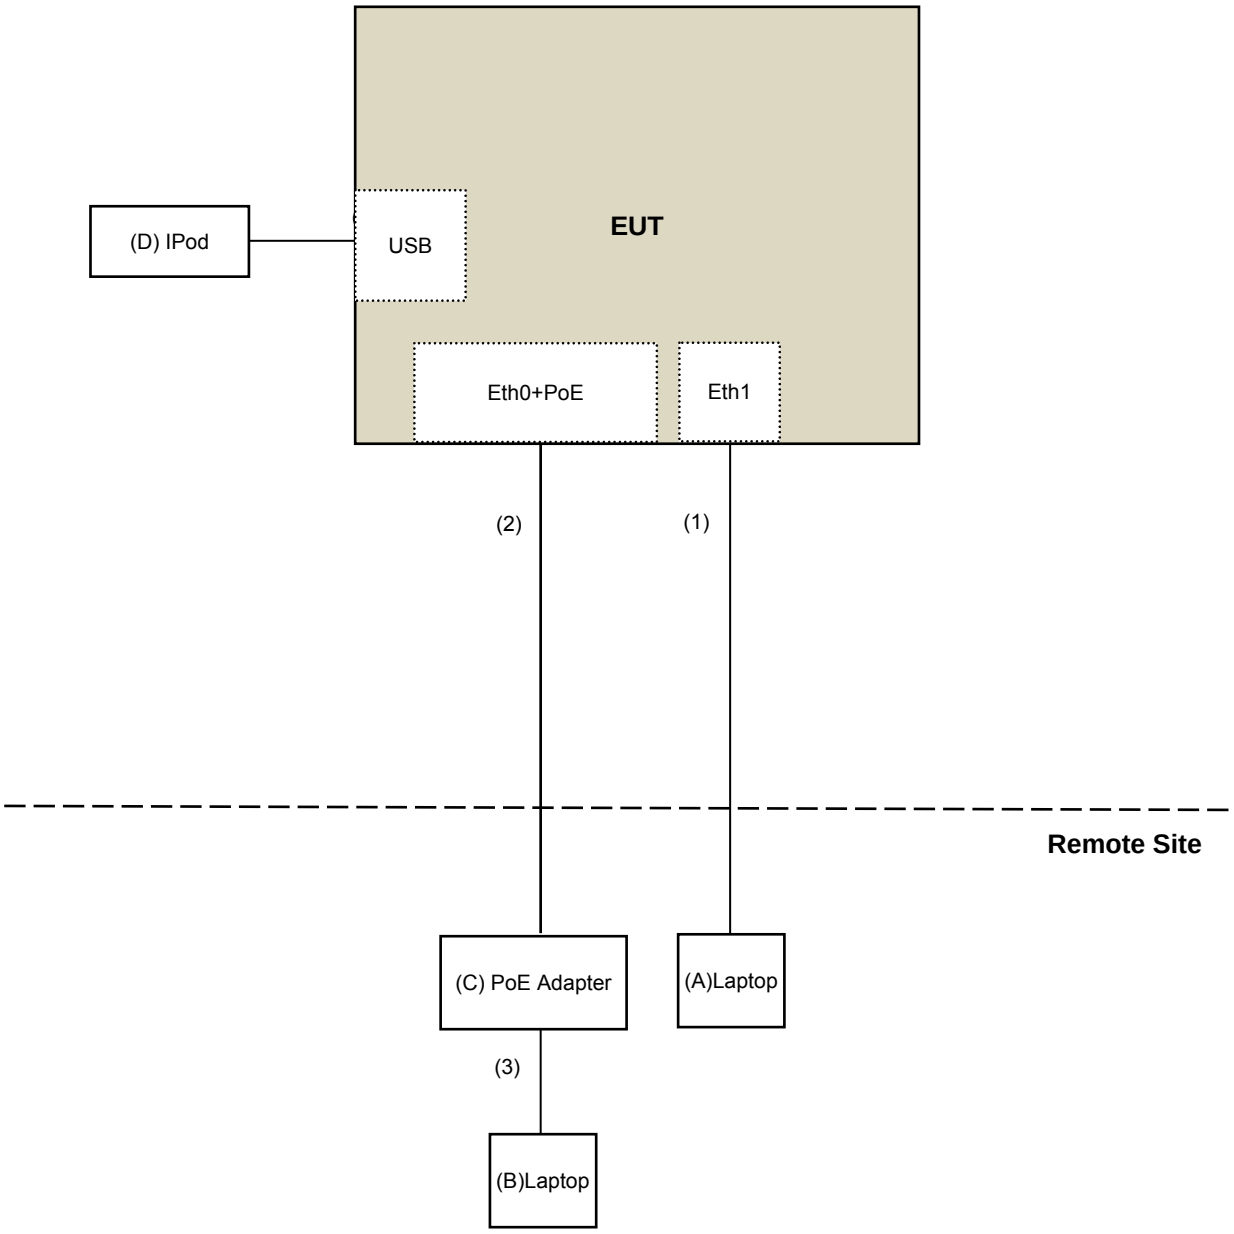

3 適用規範

3.1 規範要求和參考

(1)傳導之規定

依據國家通訊傳播委員會低功率射頻電機技術規範之 2.3 節，電源傳導干擾之限制要求如下:

頻率(MHz)	傳導限制值 (dBuV)	
	準峰值(Quasi-peak)	平均值(Average)
0.15-0.5	66-56(註)	56-46(註)
0.5-5	56	46
5-30	60	50

(註)：隨頻率之對數遞減。

(2)帶外發射之規定

(I) 操作於 5.15 GHz~5.35 GHz 及 5.470 GHz ~5.725 GHz 頻段:

依據國家通訊傳播委員會低功率射頻電機技術規範 4.7.4.1 節之要求，帶外發射之有效等向輻射功率(EIRP)≦-27 dBm/MHz。

(II) 操作於 5.725 GHz~5.850 GHz 頻段:

依據國家通訊傳播委員會低功率射頻電機技術規範 4.7.4.2 節之要求，所有頻帶邊緣向外 5 MHz 內頻率之發射，有效等向輻射功率(EIRP)≦27 dBm/MHz～15.6 dBm/MHz (以線性法計算對應之限制值)；所有頻帶邊緣向外 5 MHz～25 MHz，有效等向輻射功率 35(EIRP)≦15.6 dBm/MHz～10 dBm/MHz (以線性法計算對應之限制值)；所有頻帶邊緣外 25 MHz～75 MHz，有效等向輻射功率(EIRP)≦10 dBm/MHz～-27 dBm/MHz(以線性法計算對應之限制值)；所有頻帶邊緣外≧75 MHz 的頻率之發射，有效等向輻射功率(EIRP)≦-27 dBm/MHz；有關遮罩限制值詳圖 1。

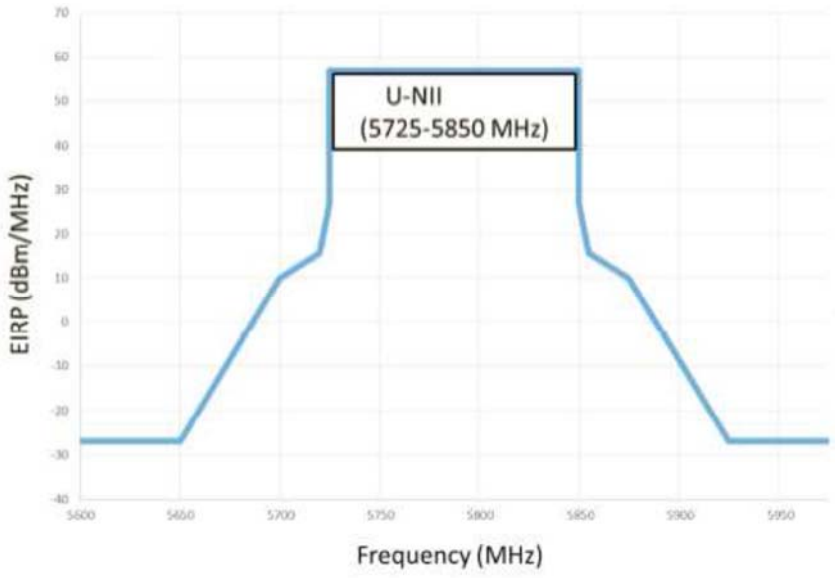


圖 1

在 1 GHz 以下不必要之發射，應符合 2.8 之規定。此外，落於 2.7 禁用頻段之輻射發射，應符合 2.8 之規定。

頻率(MHz)	電場強度(微伏特/公尺, uV/m)	測距(公尺)
0.009 - 0.490(含)	2,400/f(kHz)	300
0.490 (不含) - 1.705 (含)	24,000/f(kHz)	30
1.705(不含) - 30 (不含)	30	30
30 (含) - 88 (含)	100	3
88 (不含)- 216 (含)	150	3
216 (不含)- 960 (含)	200	3
960 (不含)以上	500	3

(3)天線之規定

天線規格不受第 2.2 節規定之限制。

(4)天線增益之要求

低功率發射機，依據國家通訊傳播委員會低功率射頻電機技術規範 3.10.1.3 節及 4.7.3 節之規定如下：

(I) 操作於 5.15 GHz~5.25 GHz 頻段：

(A) 供戶外操作使用: 使用超過6 dBi 方向增益之發射天線時，應依超過6 dBi 天線方向增益的dBi 總量，等量減少最大傳導輸出功率及最大功率頻譜密度。在水平面仰角超過30 度時，其最大EIRP 應小於或等於21 dBm。

(B) 供室內操作使用: 使用超過6 dBi 方向增益之發射天線時，應依超過6 dBi 天線方向增益的dBi 總量，等量減少最大傳導輸出功率及最大功率頻譜密度。

(C) 供固定式點對點操作使用: 使用超過23 dBi方向增益之指向性天線時，應依超過23 dBi天線方向增益的dBi 總量，等量減少最大傳導輸出功率及最大功率頻譜密度。固定式點對點操作，不包括點對多點系統、全方向性應用及多台共站發射機傳送相同資訊。

(D) 供用戶端裝置(Client Device)操作使用: 使用超過6 dBi 方向增益之發射天線時，應依超過6 dBi 天線方向增益的dBi 總量，等量減少最大傳導輸出功率及最大功率頻譜密度。

(II) 操作於 5.25 GHz~5.35 GHz 與 5.470 GHz ~5.725 GHz 頻段:

使用超過 6 dBi 方向增益之發射天線時，應依超過 6 dBi 天線方向增益的 dBi 總量，等量減少最大傳導輸出功率及最大功率頻譜密度。

(III) 操作於 5.725 GHz~5.850 GHz 頻段:

(A) 供固定式點對點操作時，使用方向增益超過6 dBi 之發射天線，可不需對應減少發射器之傳導輸出功率限制值。

(B) 除(A)外，使用超過6 dBi 方向增益之發射天線時，應依超過6 dBi 天線方向增益的dBi 總量，等量減少最大傳導輸出功率及最大功率頻譜密度。

(5) 6dB 頻寬之要求

(I) 操作於 5.725 GHz~5.850 GHz 頻段:

依據國家通訊傳播委員會低功率射頻電機技術規範 4.7.5 節之規定，其 6dB 頻寬至少應有 500kHz。

(6) 峰值傳導輸出功率之要求

(I) 操作於 5.15 GHz~5.25 GHz 頻段:

依據國家通訊傳播委員會低功率射頻電機技術規範 4.7.3.1 節之要求:

(A) 供戶外操作使用/供室內操作使用/供固定式點對點操作使用: 最大傳導輸出功率應小於或等於1 W。

(B) 供用戶端裝置(Client Device)操作使用: 最大傳導輸出功率應小於或等於250 mW。

(II) 操作於 5.25 GHz~5.35 GHz 及 5.470 GHz ~5.725 GHz 頻段:

依據國家通訊傳播委員會低功率射頻電機技術規範4.7.3.2節之規定，最大傳導輸出功率應小於或等於250 mW或11dBm+10log B (B是26 dB發射頻寬，單位MHz)之較小者。

(III) 操作於 5.725 GHz~5.850 GHz 頻段:
依據國家通訊傳播委員會低功率射頻電機技術規範 4.7.3.3 節之規定，最大傳導輸出功率應小於或等於 1 W。

(7)功率頻譜密度之要求

(I) 操作於 5.15 GHz~5.25 GHz 頻段:
依據國家通訊傳播委員會低功率射頻電機技術規範 4.7.3.1 節之要求:
(A) 供戶外操作使用/供室內操作使用/供固定式點對點操作使用: 在任何1 MHz 頻帶中最大功率頻譜密度應小於或等於17 dBm。
(B) 供用戶端裝置(Client Device)操作使用: 在任何1 MHz 頻帶中最大功率頻譜密度應小於或等於11 dBm。

(II) 操作於 5.25 GHz~5.35 GHz 及 5.470 GHz ~5.725 GHz 頻段:
依據國家通訊傳播委員會低功率射頻電機技術規範4.7.3.2節之規定，最大功率頻譜密度在任何1 MHz 頻帶中應小於或等於11 dBm。

(III) 操作於5.725 GHz~5.850 GHz頻段:
依據國家通訊傳播委員會低功率射頻電機技術規範 4.7.3.3 節之規定，在任何 500 kHz 頻帶中最大功率頻譜密度應小於或等於 30 dBm。

(8)發射功率控制(TPC)及動態頻率選擇(DFS)之要求

依據國家通訊傳播委員會低功率射頻電機技術規範4.7.7.1及4.7.7.2節之規定。

發射功率控制(TPC)：操作於5.25 GHz～5.35 GHz 與5.470 GHz～5.725 GHz 頻段的設備，應具備發射功率控制功能。設備必須至少具有6 dB低於平均EIRP 30 dBm的能力。EIRP 低於500 mW 之系統不須具備TPC 功能。

動態頻率選擇(DFS)：操作於5.25 GHz～5.35 GHz與5.470 GHz～5.725 GHz頻段之設備應具備動態頻率選擇雷達偵測功能並啟動之，以完整偵測使用頻帶內之雷達訊號，避免與雷達系統同頻道操作。相關規定如下：
(1) 最低動態頻率選擇的偵測門檻
(A) 最大EIRP 為200 mW～1 W之設備，其最低動態頻率選擇的偵測門檻值為-64dBm。
(B) 最大EIRP 低於200 mW，且功率頻譜密度小於10 dBm/MHz 之設備，其最低動態頻率選擇的偵測門檻值為-62 dBm。
(C) 最大EIRP 低於200 mW，且功率頻譜密度大於或等於10 dBm/MHz 之設備，其最低動態頻率選擇的偵測門檻值為-64 dBm。
(D) 此偵測門檻值為1 微秒內之平均接收功率，並以0 dBi 天線為參考基準。頻道初始設定得由系統隨機選取或使用者手動選取。
(2) 操作模式：動態頻率選擇之規定適用於以下之操作模式：
(A) 頻道可用性檢查時間之規定，適用於主控運作模式。
(B) 頻道移動時間之規定，適用於主控及受控運作模式。
(3) 頻道可用性檢查時間：設備必須檢查其可在某一頻道上起始傳送之前是否有雷達系統已經操作在該頻道上，以及何時其必須移動到另一新的頻道，在60 秒內若沒有偵測到功率位準大過上述之干擾門檻值的雷達訊號時，設備才可開始使用該頻道。
(4) 頻道移動時間：在偵測到雷達的存在後，所有在該操作頻道上的所有傳輸須在10秒內停止，在偵測到雷達訊號後，該期間內的傳輸應維持最多200 毫秒的正常通訊。另外，間歇性的管理與控制訊號可在剩餘的時間中傳送，以便撤離該操作頻道。
(5) 不可佔用期間：某一頻道已被頻道可用性檢查或"服務中"監視顯示含有雷達系統，至少須有30 分鐘的不可佔用期間。不可佔用期間起始於偵測到雷達系統的當時。

(9)無線資訊傳輸設備必須擁有安全功能之要求:

依據國家通訊傳播委員會低功率射頻電機技術規範4.7.7.3節之規定，無線資訊傳輸設備必須擁有安全功能，以保護未經授權之一方更改軟體。製造商應提出符合本節規定之相關證明文件或符合性聲明。

(10) 依據國家通訊傳播委員會低功率射頻電機技術規範 4.7.7.4 節之規定，製造商必須在操作於 U-NII 頻段

上之數位調變系統中提供安全功能，使第三方團體無法重寫程式，使其操作於非經認證之設定。該軟體必須避免發射機操作於非經認證之頻率、輸出功率、調變形式或其他射頻參數。製造商可使用私有網路，只有經授權的用戶能下載軟體、進行軟體式電子簽章或硬體式的韌體更新，新的軟體可以被合法的載入到設備中，同時又能符合上述事項，並於應用程式中描述設備授權的方法。

(11) 依據國家通訊傳播委員會低功率射頻電機技術規範 4.7.7.5 節之規定，製造商必須確保 DFS 功能無法被無線資訊傳輸設備之操作者取消。

(12)電波暴露量之評估

依據國家通訊傳播委員會低功率射頻電機技術規範 5.20.2 節之規定，若受測物於正常操作模式下，其發射機距離人體 20 公分以上者，可測試最大暴露允許值(Maximum Permissible Exposure，MPE)以證明其符合電波暴露量之要求。

限制值如下：

(1) 職業性/可控制之暴露

頻率範圍 (MHz)	電場強度 (V/m)	磁場強度 (A/m)	功率密度 (mW/cm^2)	平均時間 (minutes)
0.3 - 3.0	614	1.63	*100	6
3 - 30	1842/f	4.89/f	*900/f^2	6
30 - 300	61.4	0.163	1.0	6
300 - 1,500	---	---	f/300	6
1,500 – 100,000	---	---	5.0	6

註 1：標記*表平面波等效功率密度。

註 2：f 表測試頻率，單位：MHz。

(2) 一般人/不可控制之暴露

頻率範圍 (MHz)	電場強度 (V/m)	磁場強度 (A/m)	功率密度 (mW/cm^2)	平均時間 (minutes)
0.3 - 3.0	614	1.63	*100	30
3 - 30	1842/f	4.89/f	*180/f^2	30
30 - 300	27.5	0.073	1.0	30
300 - 1,500	---	---	f/1500	30
1,500 – 100,000	---	---	1.0	30

註 1：標記*表平面波等效功率密度。

註 2：f 表測試頻率，單位：MHz。

參考國際標準指南

KDB 558074
KDB 662911
KDB 789033

3.2 限制使用之頻帶

除本規範另有規定外，任何低功率射頻電機之主波皆不得使用下表所列各頻段之頻率；低功率射頻電機落於下表所列頻段之混附發射，其電場強度必須符合 2.8 之限制規定。

頻率(兆赫)	頻率(兆赫)	頻率(兆赫)
0.090～0.110	240.00～285.00	3332.0～3339.0
0.490～0.510	322.00～335.40	3345.8～3358.0
2.172～2.198	399.90～410.00	3500.0～4400.0
3.013～3.033	485.00～510.00	4500.0～5250.0
4.115～4.198	608.00～614.00	5350.0～5460.0
5.670～5.690	703.00～748.00	7250.0～7750.0
6.200～6.300	758.00～803.00	8025.0～8500.0
8.230～8.400	825.00～915.00	9000.0～9200.0
12.265～12.600	930.00～1240.0	9300.0～9500.0
13.340～13.430	1300.0～1427.0	10600～12700
14.965～15.020	1435.0～1626.5	13250～13400
16.700～16.755	1660.0～1785.0	14470～14500
19.965～20.020	1805.0～1880.0	15350～16200
25.500～25.700	1885.0～1900.0	17700～21400
37.475～38.275	1905.0～1985.0	22010～23120
73.500～75.400	2010.0～2025.0	23600～24000
108.00～138.00	2110.0～2170.0	31200～31800
149.90～150.05	2200.0～2300.0	36430～36500
156.70～156.90	2310.0～2390.0	38600 以上
162.01～167.17	2483.5～2900.0	
167.72～173.20	3260.0～3267.0	

4 帶外發射之量測

4.1 適用標準

待測物操作頻帶	適用標準
☒ 5.15 GHz~5.25 GHz	請見本報告 3.1 節第(2)項(I)的規定
☒ 5.25 GHz~5.35 GHz	請見本報告 3.1 節第(2)項(I)的規定
☒ 5.470 GHz~5.725 GHz	請見本報告 3.1 節第(2)項(I)的規定
☒ 5.725 GHz~5.850 GHz	請見本報告 3.1 節第(2)項(II)的規定

4.2 量測方法

在電波暗室，將待測物置於 0.8 米高的非金屬桌面，使其操作在工作狀態。接收天線置於 3 米距離。桌面要 360 度旋轉，另外接收天線從離地 1 米至 4 米升降變化，以找出最大的輻射電場強度，接收天線分別置於水平、垂直極化各執行測試一次。

備註: 對於 1GHz 以上場強輻射的測試, 待測物則置於 1.5 米高的非金屬桌面

4.3 量測儀器

For U-NII-1, U-NII-3 band:
For Radiated Emission Test: (模式 1)

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Test Receiver Keysight	N9038A	MY54450088	July 03, 2019	July 02, 2020
Pre-Amplifier EMCI	EMC001340	980142	May 25, 2020	May 24, 2021
Loop Antenna Electro-Metrics	EM-6879	264	Feb. 18, 2020	Feb. 17, 2021
RF Cable	NA	LOOPCAB-001	Jan. 08, 2020	Jan. 07, 2021
RF Cable	NA	LOOPCAB-002	Jan. 08, 2020	Jan. 07, 2021
Pre-Amplifier Mini-Circuits	ZFL-1000VH2B	AMP-ZFL-05	Apr. 28, 2020	Apr. 27, 2021
Trilog Broadband Antenna SCHWARZBECK	VULB 9168	9168-361	Nov. 11, 2019	Nov. 10, 2020
RF Cable	8D	966-3-1	Mar. 17, 2020	Mar. 16, 2021
RF Cable	8D	966-3-2	Mar. 17, 2020	Mar. 16, 2021
RF Cable	8D	966-3-3	Mar. 17, 2020	Mar. 16, 2021
Fixed attenuator Mini-Circuits	UNAT-5+	PAD-3m-3-01	Sep. 26, 2019	Sep. 25, 2020
Horn_Antenna SCHWARZBECK	BBHA9120-D	9120D-406	Nov. 24, 2019	Nov. 23, 2020
Pre-Amplifier EMCI	EMC12630SE	980384	Jan. 15, 2020	Jan. 14, 2021
RF Cable	EMC104-SM-SM-1200	160922	Jan. 15, 2020	Jan. 14, 2021
RF Cable	EMC104-SM-SM-2000	180601	June 10, 2019	June 09, 2020
RF Cable	EMC104-SM-SM-6000	180602	June 10, 2019	June 09, 2020
Spectrum Analyzer Keysight	N9030A	MY54490679	July 17, 2019	July 16, 2020
Pre-Amplifier EMCI	EMC184045SE	980387	Jan. 15, 2020	Jan. 14, 2021
Horn_Antenna SCHWARZBECK	BBHA 9170	BBHA9170519	Nov. 24, 2019	Nov. 23, 2020
RF Cable	EMC102-KM-KM-1200	160924	Jan. 15, 2020	Jan. 14, 2021
RF Cable	EMC-KM-KM-4000	200214	Mar. 11, 2020	Mar. 10, 2021
Software	ADT_Radiated_V8.7.08	NA	NA	NA
Antenna Tower & Turn Table Max-Full	MF-7802	MF780208406	NA	NA
Boresight Antenna Fixture	FBA-01	FBA-SIP01	NA	NA

Note:
1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in 966 Chamber No. 3.
3. The following table is for the measurement uncertainty, which is calculated as per the document CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

Measurement	Frequency	Uncertainty
Radiated emissions	30MHz ~ 1GHz	5.4 dB
	1GHz ~ 18GHz	5.0 dB
	18GHz ~ 40GHz	5.3 dB

For Radiated Emission (below 1GHz) test: (模式 2, 6, 12, 16)

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Test Receiver Keysight	N9038A	MY54450088	July 03, 2019	July 02, 2020
Pre-Amplifier EMCI	EMC001340	980142	May 30, 2019	May 29, 2020
Loop Antenna Electro-Metrics	EM-6879	264	Jan. 22, 2019	Jan. 21, 2020
RF Cable	NA	LOOPCAB-001	Jan. 08, 2020	Jan. 07, 2021
RF Cable	NA	LOOPCAB-002	Jan. 08, 2020	Jan. 07, 2021
Pre-Amplifier Mini-Circuits	ZFL-1000VH2B	AMP-ZFL-05	Apr. 30, 2019	Apr. 29, 2020
Trilog Broadband Antenna SCHWARZBECK	VULB 9168	9168-361	Nov. 11, 2019	Nov. 10, 2020
RF Cable	8D	966-3-1	Mar. 18, 2019	Mar. 17, 2020
RF Cable	8D	966-3-2	Mar. 18, 2019	Mar. 17, 2020
RF Cable	8D	966-3-3	Mar. 18, 2019	Mar. 17, 2020
Fixed attenuator Mini-Circuits	UNAT-5+	PAD-3m-3-01	Sep. 26, 2019	Sep. 25, 2020
Software	ADT_Radiated_V8.7.08	NA	NA	NA
Antenna Tower & Turn Table Max-Full	MF-7802	MF780208406	NA	NA

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in 966 Chamber No. 3.
3. The following table is for the measurement uncertainty, which is calculated as per the document CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

Measurement	Frequency	Uncertainty
Radiated emissions	30MHz ~ 1GHz	5.1 dB

For Radiated Emission (above 1GHz) test: (模式 2~12)
For OOBE test: (模式 7~11)

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Test Receiver Keysight	N9038A	MY54450088	July 03, 2019	July 02, 2020
Horn_Antenna SCHWARZBECK	BBHA9120-D	9120D-406	Nov. 24, 2019	Nov. 23, 2020
Pre-Amplifier EMCI	EMC12630SE	980384	Jan. 15, 2020	Jan. 14, 2021
RF Cable	EMC104-SM-SM-1200	160922	Jan. 15, 2020	Jan. 14, 2021
RF Cable	EMC104-SM-SM-2000	180601	June 10, 2019	June 09, 2020
RF Cable	EMC104-SM-SM-6000	180602	June 10, 2019	June 09, 2020
Spectrum Analyzer Keysight	N9030A	MY54490679	July 17, 2019	July 16, 2020
Pre-Amplifier EMCI	EMC184045SE	980387	Jan. 15, 2020	Jan. 14, 2021
Horn_Antenna SCHWARZBECK	BBHA 9170	BBHA9170519	Nov. 24, 2019	Nov. 23, 2020
RF Cable	EMC102-KM-KM-1200	160924	Jan. 15, 2020	Jan. 14, 2021
RF Cable	EMC102-KM-KM-1200	160925	Jan. 28, 2019	Jan. 27, 2020
Software	ADT_Radiated_V8.7.08	NA	NA	NA
Antenna Tower & Turn Table Max-Full	MF-7802	MF780208406	NA	NA
Boresight Antenna Fixture	FBA-01	FBA-SIP01	NA	NA

Note:
1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in 966 Chamber No. 3.
3. The following table is for the measurement uncertainty, which is calculated as per the document CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

Measurement	Frequency	Uncertainty
Radiated emissions	1GHz ~ 6GHz	5.1 dB
	6GHz ~ 18GHz	5.0 dB
	18GHz ~ 40GHz	5.2 dB

For OOBE test: (模式 2, 5, 12~16)

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Test Receiver Keysight	N9038A	MY54450088	July 03, 2019	July 02, 2020
Horn_Antenna SCHWARZBECK	BBHA9120-D	9120D-406	Nov. 25, 2018	Nov. 24, 2019
Pre-Amplifier EMCI	EMC12630SE	980384	Jan. 28, 2019	Jan. 27, 2020
RF Cable	EMC104-SM-SM-1200	160922	Jan. 28, 2019	Jan. 27, 2020
RF Cable	EMC104-SM-SM-2000	180601	June 10, 2019	June 09, 2020
RF Cable	EMC104-SM-SM-6000	180602	June 10, 2019	June 09, 2020
Spectrum Analyzer Keysight	N9030A	MY54490679	July 17, 2019	July 16, 2020
Pre-Amplifier EMCI	EMC184045SE	980387	Jan. 28, 2019	Jan. 27, 2020
Horn_Antenna SCHWARZBECK	BBHA 9170	BBHA9170519	Nov. 25, 2018	Nov. 24, 2019
RF Cable	EMC102-KM-KM-1200	160924	Jan. 28, 2019	Jan. 27, 2020
RF Cable	EMC102-KM-KM-1200	160925	Jan. 28, 2019	Jan. 27, 2020
Software	ADT_Radiated_V8.7.08	NA	NA	NA
Antenna Tower & Turn Table Max-Full	MF-7802	MF780208406	NA	NA
Boresight Antenna Fixture	FBA-01	FBA-SIP01	NA	NA

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in 966 Chamber No. 3.
3. The following table is for the measurement uncertainty, which is calculated as per the document CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

Measurement	Frequency	Uncertainty
Radiated emissions	1GHz ~ 6GHz	5.1 dB
	6GHz ~ 18GHz	5.0 dB
	18GHz ~ 40GHz	5.2 dB

For OOBE test: (模式 3~5)

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Test Receiver Keysight	N9038A	MY54450088	July 03, 2019	July 02, 2020
Horn_Antenna SCHWARZBECK	BBHA9120-D	9120D-406	Nov. 24, 2019	Nov. 23, 2020
Pre-Amplifier EMCI	EMC12630SE	980384	Jan. 28, 2019	Jan. 27, 2020
RF Cable	EMC104-SM-SM-1200	160922	Jan. 28, 2019	Jan. 27, 2020
RF Cable	EMC104-SM-SM-2000	180601	June 10, 2019	June 09, 2020
RF Cable	EMC104-SM-SM-6000	180602	June 10, 2019	June 09, 2020
Spectrum Analyzer Keysight	N9030A	MY54490679	July 17, 2019	July 16, 2020
Pre-Amplifier EMCI	EMC184045SE	980387	Jan. 28, 2019	Jan. 27, 2020
Horn_Antenna SCHWARZBECK	BBHA 9170	BBHA9170519	Nov. 24, 2019	Nov. 23, 2020
RF Cable	EMC102-KM-KM-1200	160924	Jan. 28, 2019	Jan. 27, 2020
RF Cable	EMC102-KM-KM-1200	160925	Jan. 28, 2019	Jan. 27, 2020
Software	ADT_Radiated_V8.7.08	NA	NA	NA
Antenna Tower & Turn Table Max-Full	MF-7802	MF780208406	NA	NA
Boresight Antenna Fixture	FBA-01	FBA-SIP01	NA	NA

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in 966 Chamber No. 3.
3. The following table is for the measurement uncertainty, which is calculated as per the document CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

Measurement	Frequency	Uncertainty
Radiated emissions	1GHz ~ 6GHz	5.1 dB
	6GHz ~ 18GHz	5.0 dB
	18GHz ~ 40GHz	5.2 dB

For U-NII-2A, U-NII-2C band
For Radioted Emission (above 1GHz) test: (模式 2~16)

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Test Receiver Keysight	N9038A	MY54450088	July 03, 2019	July 02, 2020
Horn_Antenna SCHWARZBECK	BBHA9120-D	9120D-406	Nov. 24, 2019	Nov. 23, 2020
Pre-Amplifier EMCI	EMC12630SE	980384	Jan. 15, 2020	Jan. 14, 2021
RF Cable	EMC104-SM-SM-1200	160922	Jan. 15, 2020	Jan. 14, 2021
RF Cable	EMC104-SM-SM-2000	180601	June 10, 2019	June 09, 2020
RF Cable	EMC104-SM-SM-6000	180602	June 10, 2019	June 09, 2020
Spectrum Analyzer Keysight	N9030A	MY54490679	July 17, 2019	July 16, 2020
Pre-Amplifier EMCI	EMC184045SE	980387	Jan. 15, 2020	Jan. 14, 2021
Horn_Antenna SCHWARZBECK	BBHA 9170	BBHA9170519	Nov. 24, 2019	Nov. 23, 2020
RF Cable	EMC102-KM-KM-1200	160924	Jan. 15, 2020	Jan. 14, 2021
RF Cable	EMC102-KM-KM-4500	181205	Aug. 26, 2019	Aug. 25, 2020
Software	ADT_Radiated_V8.7.08	NA	NA	NA
Antenna Tower & Turn Table Max-Full	MF-7802	MF780208406	NA	NA
Boresight Antenna Fixture	FBA-01	FBA-SIP01	NA	NA

Note:
1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in 966 Chamber No. 3.
3. The following table is for the measurement uncertainty, which is calculated as per the document CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

Measurement	Frequency	Uncertainty
Radiated emissions	1GHz ~ 18GHz	5.0 dB
	18GHz ~ 40GHz	5.3 dB

For Radioted Emission (above 1GHz) test: (模式 1)
For Bandedge test: (模式 1~6, 模式 11~16)

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Test Receiver Keysight	N9038A	MY54450088	July 03, 2019	July 02, 2020
Horn_Antenna SCHWARZBECK	BBHA9120-D	9120D-406	Nov. 24, 2019	Nov. 23, 2020
Pre-Amplifier EMCI	EMC12630SE	980384	Jan. 15, 2020	Jan. 14, 2021
RF Cable	EMC104-SM-SM-1200	160922	Jan. 15, 2020	Jan. 14, 2021
RF Cable	EMC104-SM-SM-2000	180601	June 10, 2019	June 09, 2020
RF Cable	EMC104-SM-SM-6000	180602	June 10, 2019	June 09, 2020
Spectrum Analyzer Keysight	N9030A	MY54490679	July 17, 2019	July 16, 2020
Pre-Amplifier EMCI	EMC184045SE	980387	Jan. 15, 2020	Jan. 14, 2021
Horn_Antenna SCHWARZBECK	BBHA 9170	BBHA9170519	Nov. 24, 2019	Nov. 23, 2020
RF Cable	EMC102-KM-KM-1200	160924	Jan. 15, 2020	Jan. 14, 2021
RF Cable	EMC-KM-KM-4000	200214	Mar. 11, 2020	Mar. 10, 2021
Software	ADT_Radiated_V8.7.08	NA	NA	NA
Antenna Tower & Turn Table Max-Full	MF-7802	MF780208406	NA	NA
Boresight Antenna Fixture	FBA-01	FBA-SIP01	NA	NA

Note:
1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in 966 Chamber No. 3.
3. The following table is for the measurement uncertainty, which is calculated as per the document CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

Measurement	Frequency	Uncertainty
Radiated emissions	1GHz ~ 18GHz	5.0 dB
	18GHz ~ 40GHz	5.3 dB

For Bandedge test: (模式 7~10)

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Test Receiver Keysight	N9038A	MY54450088	July 03, 2019	July 02, 2020
Horn_Antenna SCHWARZBECK	BBHA9120-D	9120D-406	Nov. 24, 2019	Nov. 23, 2020
Pre-Amplifier EMCI	EMC12630SE	980384	Jan. 15, 2020	Jan. 14, 2021
RF Cable	EMC104-SM-SM-1200	160922	Jan. 15, 2020	Jan. 14, 2021
RF Cable	EMC104-SM-SM-2000	180601	June 10, 2019	June 09, 2020
RF Cable	EMC104-SM-SM-6000	180602	June 10, 2019	June 09, 2020
Spectrum Analyzer Keysight	N9030A	MY54490679	July 17, 2019	July 16, 2020
Pre-Amplifier EMCI	EMC184045SE	980387	Jan. 15, 2020	Jan. 14, 2021
Horn_Antenna SCHWARZBECK	BBHA 9170	BBHA9170519	Nov. 24, 2019	Nov. 23, 2020
RF Cable	EMC102-KM-KM-1200	160924	Jan. 15, 2020	Jan. 14, 2021
RF Cable	EMC-KM-KM-4000	200214	Mar. 11, 2020	Mar. 10, 2021
Software	ADT_Radiated_V8.7.08	NA	NA	NA
Antenna Tower & Turn Table Max-Full	MF-7802	MF780208406	NA	NA
Boresight Antenna Fixture	FBA-01	FBA-SIP01	NA	NA


Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in 966 Chamber No. 3.
3. The following table is for the measurement uncertainty, which is calculated as per the document CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.


Measurement	Frequency	Uncertainty
Radiated emissions	1GHz ~ 18GHz	5.0 dB
	18GHz ~ 40GHz	5.3 dB

4.4 測試配置

<Frequency Range below 1GHz>

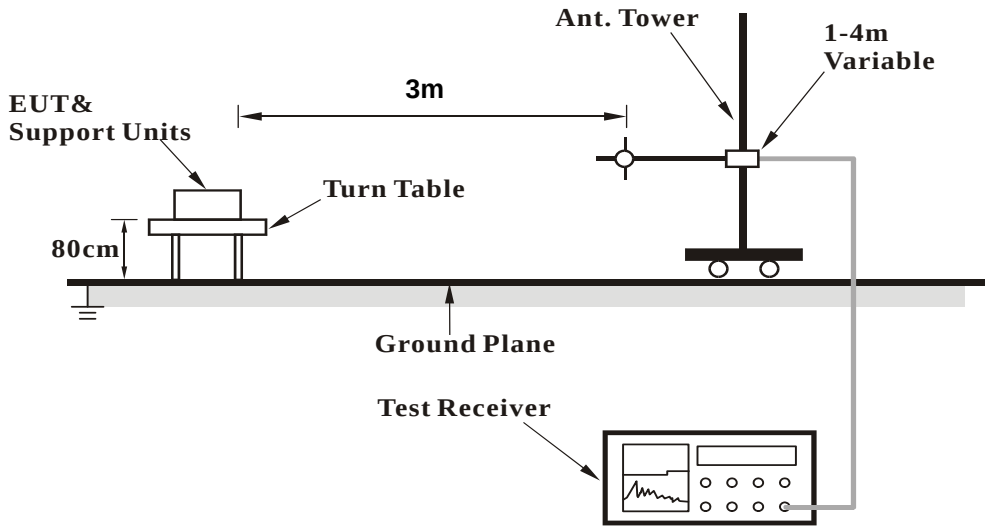

<Frequency Range above 1GHz>

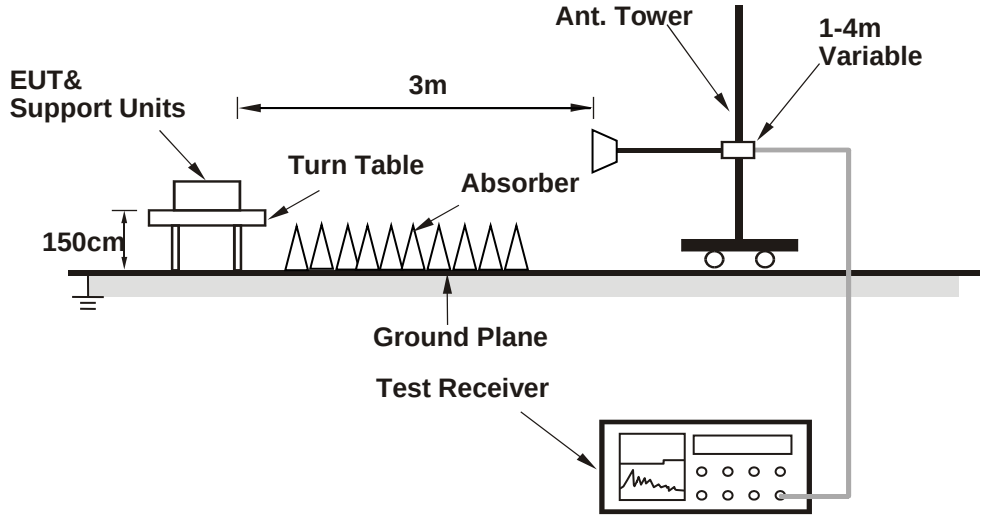

4.5 場強度之計算

場強之計算公式如下:

結果值 Emission level (dBuV/m)=機器讀值 Raw Value (dBuV) +校正因子 Correction Factor (dB/m)

餘裕度 Margin(dB)= 結果值 Emission level (dBuV/m)-限制值 Limit value (dBuV/m)

*有效等向輻射功率限制值轉換場強值如下：

Applicable To		Limit	
789033 D02 General UNII Test Procedure New Rules v02r01		Field Strength at 3m	
		PK:74 (dBμV/m)	AV:54 (dBμV/m)
操作頻帶	Applicable To	EIRP Limit	Equivalent Field Strength at 3m
5150~5250 MHz	技術規範 4.7.4.1 節	PK:-27 (dBm/MHz)	PK:68.2(dBμV/m)
5250~5350 MHz	技術規範 4.7.4.1 節		
5470~5725 MHz	技術規範 4.7.4.1 節		
5725~5850 MHz	技術規範 4.7.4.2 節	PK:-27 (dBm/MHz) *1 PK:10 (dBm/MHz) *2 PK:15.6 (dBm/MHz) *3 PK:27 (dBm/MHz) *4	PK: 68.2(dBμV/m) *1 PK:105.2 (dBμV/m) *2 PK: 110.8(dBμV/m) *3 PK:122.2 (dBμV/m) *4

*1 beyond 75 MHz or more above of the band edge.

*2 below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above.

*3 below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above.

*4 from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

Note:

有效等向輻射功率限制值轉換場強之公式如下:

$E=(30PG)^{1/2}/d$

E: 以最寬解析頻寬所測得之最大場強值，單位:V/m。

G: 發射天線相對於全向性輻射器之數值增益。

d: 測試場強的距離，單位: m。

P: 求得之功率，單位:W。

4.6 量測結果 (模式 1)

4.6.1 發射諧波


802.11a

操 作 模 式 ：	發射	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 36：5.18 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=10Hz
量 測 場 地 溫 度 ：	24℃	量 測 場 地 濕 度 ：	68%RH
測 試 日 期 ：	109 年 5 月 30 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	68.9 PK	74.0	-5.1	1.50 H	311	65.2	3.7
2	5150.00	50.9 AV	54.0	-3.1	1.50 H	311	47.2	3.7
3	*5180.00	117.6 PK			1.50 H	311	114.0	3.6
4	*5180.00	107.6 AV			1.50 H	311	104.0	3.6
5	#10360.00	46.5 PK	68.2	-21.7	1.85 H	177	33.8	12.7
6	15540.00	50.8 PK	74.0	-23.2	1.11 H	329	37.6	13.2
7	15540.00	38.4 AV	54.0	-15.6	1.11 H	329	25.2	13.2
8	20720.00	-	-	-	-	-	-	-
9	#25900.00	-	-	-	-	-	-	-
10	#31080.00	-	-	-	-	-	-	-
11	#36260.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

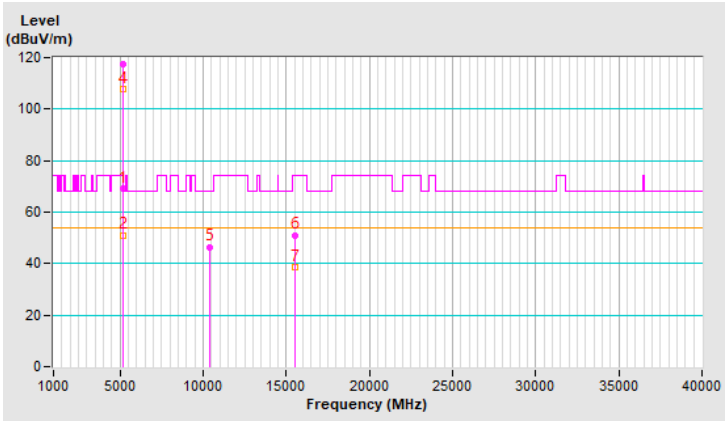


操 作 模 式 ：	發射	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 36：5.18 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=10Hz
量 測 場 地 溫 度 ：	24℃	量 測 場 地 濕 度 ：	68%RH
測 試 日 期 ：	109 年 5 月 30 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	71.3 PK	74.0	-2.7	3.63 V	348	67.6	3.7
2	5150.00	53.5 AV	54.0	-0.5	3.63 V	348	49.8	3.7
3	*5180.00	116.5 PK			3.63 V	348	112.9	3.6
4	*5180.00	106.0 AV			3.63 V	348	102.4	3.6
5	#10360.00	46.2 PK	68.2	-22.0	1.13 V	109	33.5	12.7
6	15540.00	57.2 PK	74.0	-16.8	1.05 V	79	44.0	13.2
7	15540.00	43.7 AV	54.0	-10.3	1.05 V	79	30.5	13.2
8	20720.00	-	-	-	-	-	-	-
9	#25900.00	-	-	-	-	-	-	-
10	#31080.00	-	-	-	-	-	-	-
11	#36260.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

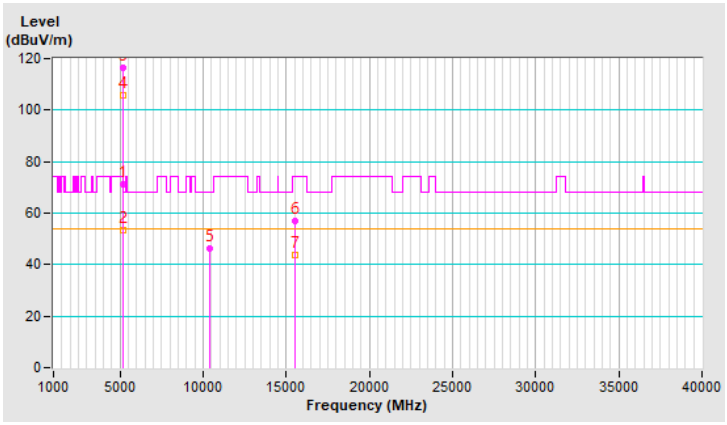


操 作 模 式 ：	發射	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 40：5.2 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=10Hz
量 測 場 地 溫 度 ：	24℃	量 測 場 地 濕 度 ：	68%RH
測 試 日 期 ：	109 年 5 月 30 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5200.00	118.9 PK			1.73 H	313	115.4	3.5
2	*5200.00	109.1 AV			1.73 H	313	105.6	3.5
3	#10400.00	46.5 PK	68.2	-21.7	1.85 H	163	33.7	12.8
4	15600.00	51.0 PK	74.0	-23.0	1.08 H	315	37.5	13.5
5	15600.00	40.4 AV	54.0	-13.6	1.08 H	315	26.9	13.5
6	20800.00	-	-	-	-	-	-	-
7	#26000.00	-	-	-	-	-	-	-
8	31200.00	-	-	-	-	-	-	-
9	#36400.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

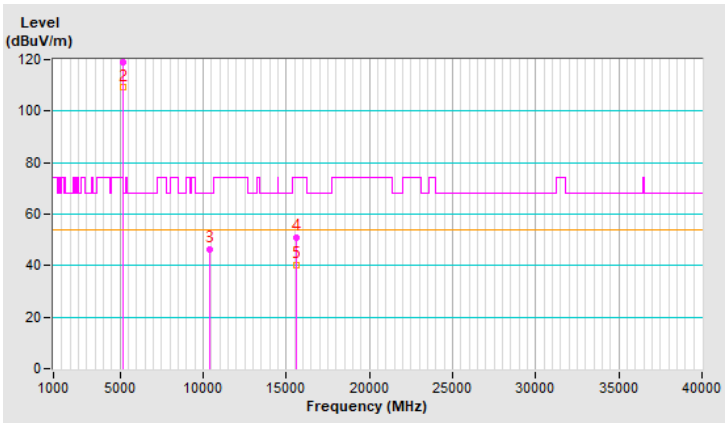


操 作 模 式 ：	發射	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 40：5.2 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=10Hz
量 測 場 地 溫 度 ：	24℃	量 測 場 地 濕 度 ：	68%RH
測 試 日 期 ：	109 年 5 月 30 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5200.00	117.0 PK			3.62 V	339	113.5	3.5
2	*5200.00	108.6 AV			3.62 V	339	105.1	3.5
3	#10400.00	46.6 PK	68.2	-21.6	1.13 V	111	33.8	12.8
4	15600.00	57.0 PK	74.0	-17.0	1.07 V	59	43.5	13.5
5	15600.00	44.5 AV	54.0	-9.5	1.07 V	59	31.0	13.5
6	20800.00	-	-	-	-	-	-	-
7	#26000.00	-	-	-	-	-	-	-
8	31200.00	-	-	-	-	-	-	-
9	#36400.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

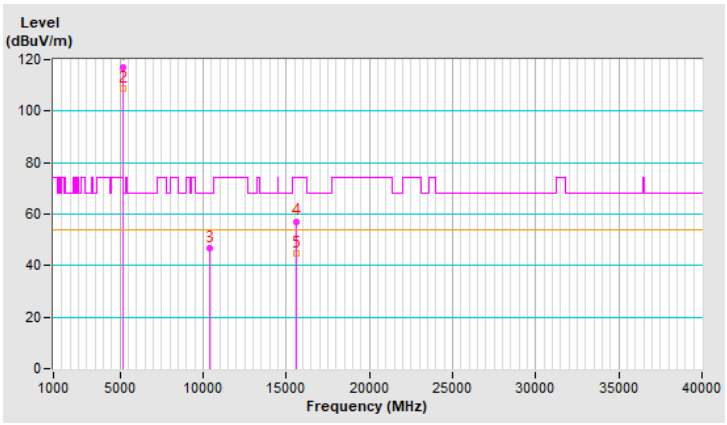


操 作 模 式 ：	發射	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 48：5.24 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=10Hz
量 測 場 地 溫 度 ：	24℃	量 測 場 地 濕 度 ：	68%RH
測 試 日 期 ：	109 年 5 月 30 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5240.00	118.7 PK			1.70 H	320	115.2	3.5
2	*5240.00	108.7 AV			1.70 H	320	105.2	3.5
3	5350.00	54.1 PK	74.0	-19.9	1.70 H	320	50.7	3.4
4	5350.00	41.8 AV	54.0	-12.2	1.70 H	320	38.4	3.4
5	#10480.00	46.3 PK	68.2	-21.9	1.84 H	160	33.2	13.1
6	15720.00	51.1 PK	74.0	-22.9	1.13 H	313	37.3	13.8
7	15720.00	38.6 AV	54.0	-15.4	1.13 H	313	24.8	13.8
8	20960.00	-	-	-	-	-	-	-
9	#26200.00	-	-	-	-	-	-	-
10	31440.00	-	-	-	-	-	-	-
11	#36680.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

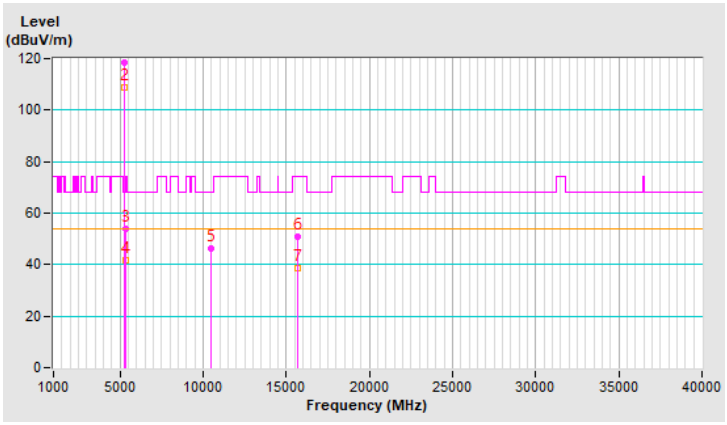


操 作 模 式 ：	發射	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 48：5.24 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=10Hz
量 測 場 地 溫 度 ：	24℃	量 測 場 地 濕 度 ：	68%RH
測 試 日 期 ：	109 年 5 月 30 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5240.00	117.6 PK			3.18 V	353	114.1	3.5
2	*5240.00	108.5 AV			3.18 V	353	105.0	3.5
3	5350.00	54.4 PK	74.0	-19.6	3.18 V	353	51.0	3.4
4	5350.00	42.5 AV	54.0	-11.5	3.18 V	353	39.1	3.4
5	#10480.00	46.4 PK	68.2	-21.8	1.08 V	112	33.3	13.1
6	15720.00	56.8 PK	74.0	-17.2	1.11 V	61	43.0	13.8
7	15720.00	43.4 AV	54.0	-10.6	1.11 V	61	29.6	13.8
8	20960.00	-	-	-	-	-	-	-
9	#26200.00	-	-	-	-	-	-	-
10	31440.00	-	-	-	-	-	-	-
11	#36680.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

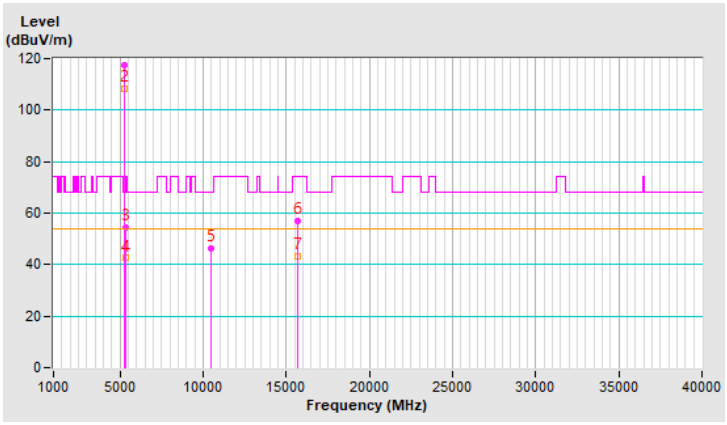


操 作 模 式 ：	發射	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 52：5.26 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=10Hz
量 測 場 地 溫 度 ：	24℃	量 測 場 地 濕 度 ：	68%RH
測 試 日 期 ：	109 年 5 月 17 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	54.9 PK	74.0	-19.1	1.67 H	321	51.2	3.7
2	5150.00	44.0 AV	54.0	-10.0	1.67 H	321	40.3	3.7
3	*5260.00	120.7 PK			1.67 H	321	117.3	3.4
4	*5260.00	110.9 AV			1.67 H	321	107.5	3.4
5	#10520.00	46.7 PK	68.2	-21.5	1.83 H	243	33.6	13.1
6	15780.00	45.4 PK	74.0	-28.6	3.13 H	146	31.9	13.5
7	15780.00	35.4 AV	54.0	-18.6	3.13 H	146	21.9	13.5
8	21040.00	-	-	-	-	-	-	-
9	#26300.00	-	-	-	-	-	-	-
10	31560.00	-	-	-	-	-	-	-
11	#36820.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

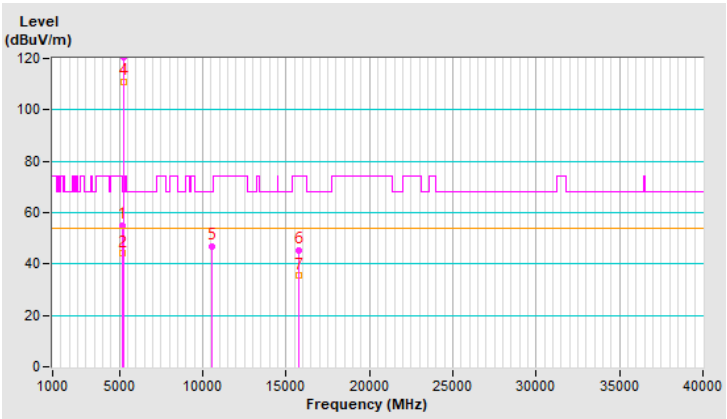


操 作 模 式 ：	發射	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 52：5.26 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=10Hz
量 測 場 地 溫 度 ：	24℃	量 測 場 地 濕 度 ：	68%RH
測 試 日 期 ：	109 年 5 月 17 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	55.4 PK	74.0	-18.6	3.41 V	356	51.7	3.7
2	5150.00	44.6 AV	54.0	-9.4	3.41 V	356	40.9	3.7
3	*5260.00	121.3 PK			3.41 V	356	117.9	3.4
4	*5260.00	111.3 AV			3.41 V	356	107.9	3.4
5	#10520.00	46.6 PK	68.2	-21.6	1.63 V	129	33.5	13.1
6	15780.00	48.2 PK	74.0	-25.8	1.54 V	227	34.7	13.5
7	15780.00	37.3 AV	54.0	-16.7	1.54 V	227	23.8	13.5
8	21040.00	-	-	-	-	-	-	-
9	#26300.00	-	-	-	-	-	-	-
10	31560.00	-	-	-	-	-	-	-
11	#36820.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

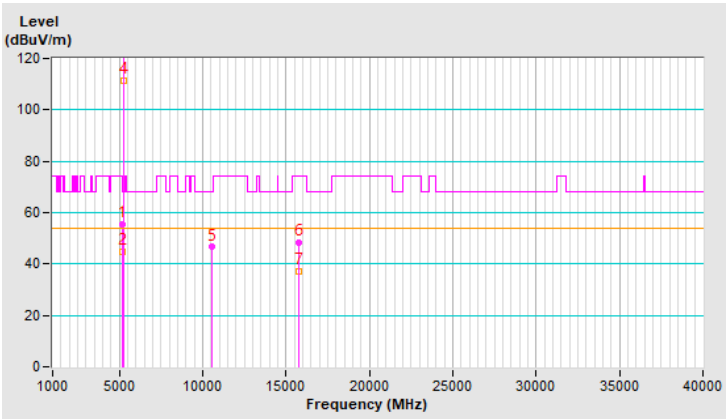


操 作 模 式 ：	發射	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 60：5.3 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=10Hz
量 測 場 地 溫 度 ：	24℃	量 測 場 地 濕 度 ：	68%RH
測 試 日 期 ：	109 年 5 月 17 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5300.00	120.6 PK			1.62 H	330	117.3	3.3
2	*5300.00	110.8 AV			1.62 H	330	107.5	3.3
3	10600.00	46.6 PK	74.0	-27.4	1.94 H	227	33.7	12.9
4	10600.00	35.0 AV	54.0	-19.0	1.94 H	227	22.1	12.9
5	15900.00	44.8 PK	74.0	-29.2	3.08 H	132	32.0	12.8
6	15900.00	35.1 AV	54.0	-18.9	3.08 H	132	22.3	12.8
7	21200.00	-	-	-	-	-	-	-
8	#26500.00	-	-	-	-	-	-	-
9	31800.00	-	-	-	-	-	-	-
10	#37100.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

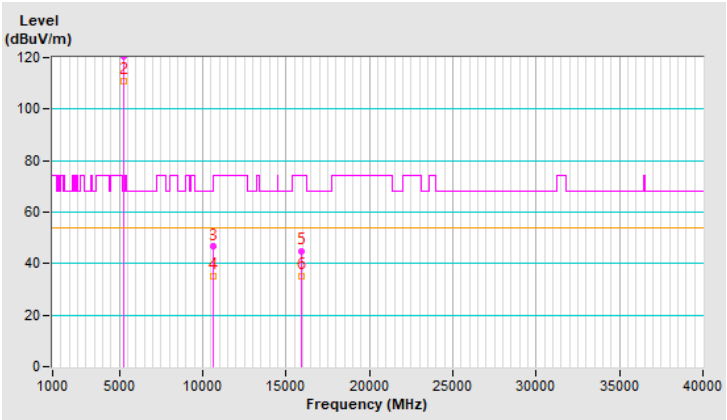


操 作 模 式 ：	發射	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 60：5.3 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=10Hz
量 測 場 地 溫 度 ：	24℃	量 測 場 地 濕 度 ：	68%RH
測 試 日 期 ：	109 年 5 月 17 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5300.00	120.6 PK			3.56 V	351	117.3	3.3
2	*5300.00	111.1 AV			3.56 V	351	107.8	3.3
3	10600.00	47.3 PK	74.0	-26.7	1.69 V	113	34.4	12.9
4	10600.00	35.6 AV	54.0	-18.4	1.69 V	113	22.7	12.9
5	15900.00	48.6 PK	74.0	-25.4	1.47 V	240	35.8	12.8
6	15900.00	37.7 AV	54.0	-16.3	1.47 V	240	24.9	12.8
7	21200.00	-	-	-	-	-	-	-
8	#26500.00	-	-	-	-	-	-	-
9	31800.00	-	-	-	-	-	-	-
10	#37100.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

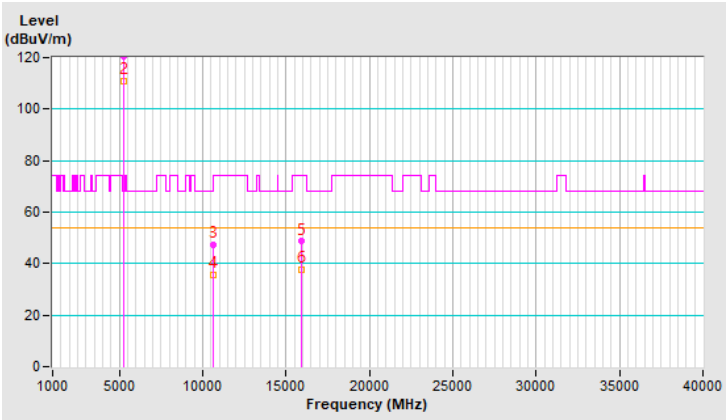


操 作 模 式 ：	發射	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 64：5.32 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=10Hz
量 測 場 地 溫 度 ：	24℃	量 測 場 地 濕 度 ：	68%RH
測 試 日 期 ：	109 年 5 月 17 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5320.00	117.7 PK			1.69 H	324	114.3	3.4
2	*5320.00	107.7 AV			1.69 H	324	104.3	3.4
3	5350.00	65.5 PK	74.0	-8.5	1.69 H	324	62.1	3.4
4	5350.00	49.9 AV	54.0	-4.1	1.69 H	324	46.5	3.4
5	10640.00	46.4 PK	74.0	-27.6	1.81 H	217	33.5	12.9
6	10640.00	34.9 AV	54.0	-19.1	1.81 H	217	22.0	12.9
7	15960.00	45.0 PK	74.0	-29.0	3.12 H	149	32.2	12.8
8	15960.00	35.1 AV	54.0	-18.9	3.12 H	149	22.3	12.8
9	21280.00	-	-	-	-	-	-	-
10	#26600.00	-	-	-	-	-	-	-
11	#31920.00	-	-	-	-	-	-	-
12	#37240.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

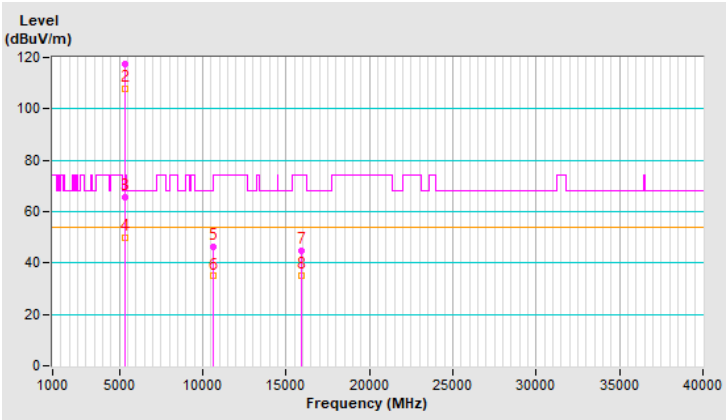


操 作 模 式 ：	發射	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 64：5.32 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=10Hz
量 測 場 地 溫 度 ：	24℃	量 測 場 地 濕 度 ：	68%RH
測 試 日 期 ：	109 年 5 月 17 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5320.00	116.8 PK			3.82 V	359	113.4	3.4
2	*5320.00	107.1 AV			3.82 V	359	103.7	3.4
3	5350.00	65.4 PK	74.0	-8.6	3.82 V	359	62.0	3.4
4	5350.00	53.9 AV	54.0	-0.1	3.82 V	359	50.5	3.4
5	10640.00	47.5 PK	74.0	-26.5	1.75 V	114	34.6	12.9
6	10640.00	35.7 AV	54.0	-18.3	1.75 V	114	22.8	12.9
7	15960.00	48.6 PK	74.0	-25.4	1.57 V	218	35.8	12.8
8	15960.00	37.6 AV	54.0	-16.4	1.57 V	218	24.8	12.8
9	21280.00	-	-	-	-	-	-	-
10	#26600.00	-	-	-	-	-	-	-
11	#31920.00	-	-	-	-	-	-	-
12	#37240.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

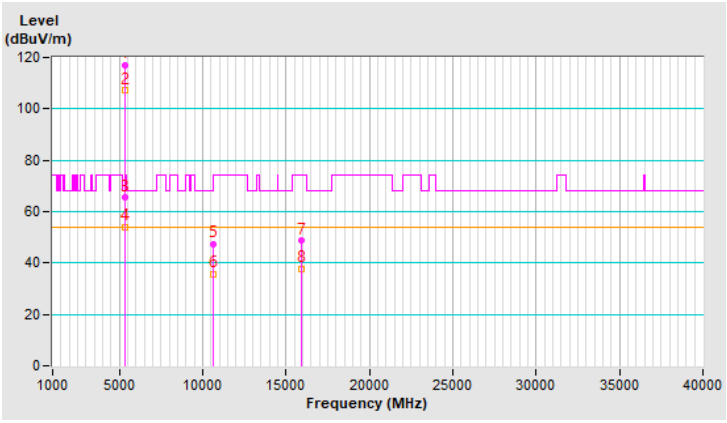


操 作 模 式 ：	發射	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 100：5.5 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=10Hz
量 測 場 地 溫 度 ：	24℃	量 測 場 地 濕 度 ：	68%RH
測 試 日 期 ：	109 年 5 月 17 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	54.4 PK	74.0	-19.6	1.51 H	326	50.6	3.8
2	5460.00	41.7 AV	54.0	-12.3	1.51 H	326	37.9	3.8
3	#5470.00	65.0 PK	68.2	-3.2	1.51 H	326	61.1	3.9
4	*5500.00	113.5 PK			1.51 H	326	109.6	3.9
5	*5500.00	103.5 AV			1.51 H	326	99.6	3.9
6	11000.00	46.6 PK	74.0	-27.4	1.80 H	214	33.6	13.0
7	11000.00	35.0 AV	54.0	-19.0	1.80 H	214	22.0	13.0
8	#16500.00	45.3 PK	68.2	-22.9	3.15 H	157	30.7	14.6
9	#22000.00	-	-	-	-	-	-	-
10	#27500.00	-	-	-	-	-	-	-
11	#33000.00	-	-	-	-	-	-	-
12	#38500.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

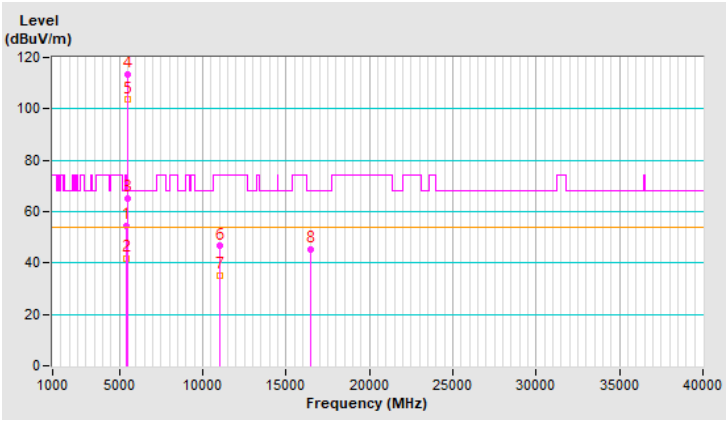


操 作 模 式 ：	發射	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 100：5.5 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=10Hz
量 測 場 地 溫 度 ：	24℃	量 測 場 地 濕 度 ：	68%RH
測 試 日 期 ：	109 年 5 月 17 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	55.9 PK	74.0	-18.1	3.24 V	359	52.1	3.8
2	5460.00	42.7 AV	54.0	-11.3	3.24 V	359	38.9	3.8
3	#5470.00	68.0 PK	68.2	-0.2	3.24 V	359	64.1	3.9
4	*5500.00	113.9 PK			3.24 V	359	110.0	3.9
5	*5500.00	103.4 AV			3.24 V	359	99.5	3.9
6	11000.00	47.7 PK	74.0	-26.3	1.75 V	104	34.7	13.0
7	11000.00	35.7 AV	54.0	-18.3	1.75 V	104	22.7	13.0
8	#16500.00	49.1 PK	68.2	-19.1	1.63 V	214	34.5	14.6
9	#22000.00	-	-	-	-	-	-	-
10	#27500.00	-	-	-	-	-	-	-
11	#33000.00	-	-	-	-	-	-	-
12	#38500.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

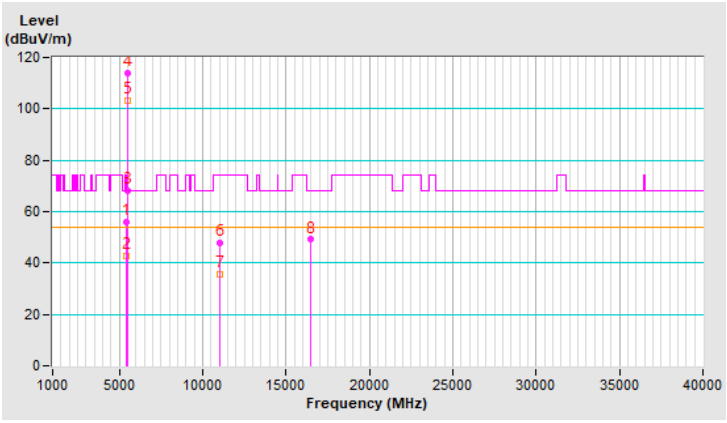


操 作 模 式 ：	發射	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 116：5.58 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=10Hz
量 測 場 地 溫 度 ：	24℃	量 測 場 地 濕 度 ：	68%RH
測 試 日 期 ：	109 年 5 月 17 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5580.00	119.6 PK			1.58 H	323	115.8	3.8
2	*5580.00	110.2 AV			1.58 H	323	106.4	3.8
3	11160.00	46.1 PK	74.0	-27.9	1.86 H	235	33.0	13.1
4	11160.00	34.7 AV	54.0	-19.3	1.86 H	235	21.6	13.1
5	#16740.00	44.4 PK	68.2	-23.8	3.09 H	160	28.2	16.2
6	22320.00	-	-	-	-	-	-	-
7	#27900.00	-	-	-	-	-	-	-
8	#33480.00	-	-	-	-	-	-	-
9	39060.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

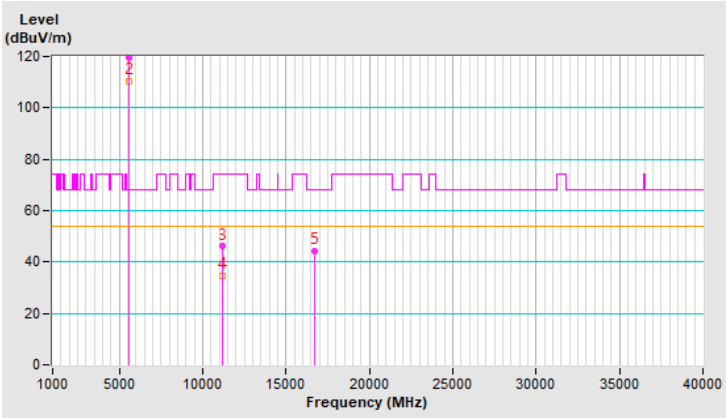


操 作 模 式 ：	發射	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 116：5.58 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=10Hz
量 測 場 地 溫 度 ：	24℃	量 測 場 地 濕 度 ：	68%RH
測 試 日 期 ：	109 年 5 月 17 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5580.00	120.0 PK			3.59 V	354	116.2	3.8
2	*5580.00	111.0 AV			3.59 V	354	107.2	3.8
3	11160.00	47.3 PK	74.0	-26.7	1.78 V	111	34.2	13.1
4	11160.00	35.3 AV	54.0	-18.7	1.78 V	111	22.2	13.1
5	#16740.00	47.9 PK	68.2	-20.3	1.53 V	225	31.7	16.2
6	22320.00	-	-	-	-	-	-	-
7	#27900.00	-	-	-	-	-	-	-
8	#33480.00	-	-	-	-	-	-	-
9	39060.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

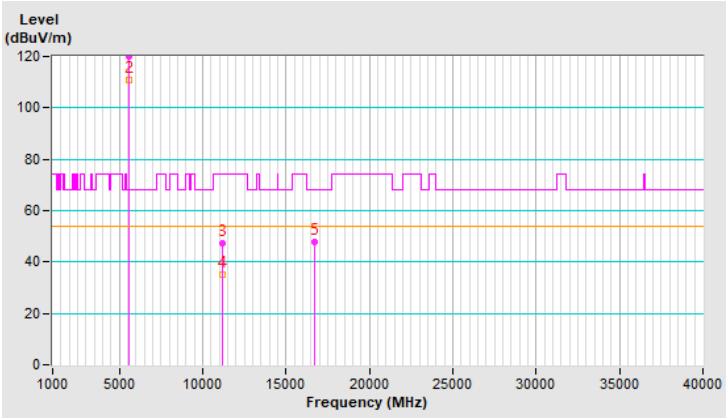


操 作 模 式 ：	發射	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 140：5.7 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=10Hz
量 測 場 地 溫 度 ：	24℃	量 測 場 地 濕 度 ：	68%RH
測 試 日 期 ：	109 年 5 月 17 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5700.00	113.4 PK			1.51 H	327	109.4	4.0
2	*5700.00	104.5 AV			1.51 H	327	100.5	4.0
3	#5725.00	64.7 PK	68.2	-3.5	1.51 H	327	60.7	4.0
4	11400.00	46.0 PK	74.0	-28.0	1.75 H	203	32.8	13.2
5	11400.00	34.5 AV	54.0	-19.5	1.75 H	203	21.3	13.2
6	#17100.00	44.6 PK	68.2	-23.6	3.27 H	156	27.4	17.2
7	22800.00	-	-	-	-	-	-	-
8	#28500.00	-	-	-	-	-	-	-
9	#34200.00	-	-	-	-	-	-	-
10	39900.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

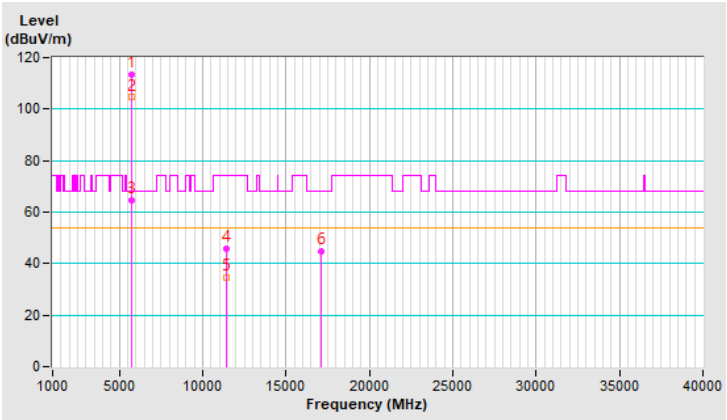


操 作 模 式 ：	發射	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 140：5.7 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=10Hz
量 測 場 地 溫 度 ：	24℃	量 測 場 地 濕 度 ：	68%RH
測 試 日 期 ：	109 年 5 月 17 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5700.00	112.4 PK			3.50 V	356	108.4	4.0
2	*5700.00	104.2 AV			3.50 V	356	100.2	4.0
3	#5725.00	67.7 PK	68.2	-0.5	3.50 V	356	63.7	4.0
4	11400.00	48.5 PK	74.0	-25.5	1.75 V	101	35.3	13.2
5	11400.00	36.2 AV	54.0	-17.8	1.75 V	101	23.0	13.2
6	#17100.00	48.1 PK	68.2	-20.1	1.62 V	230	30.9	17.2
7	22800.00	-	-	-	-	-	-	-
8	#28500.00	-	-	-	-	-	-	-
9	#34200.00	-	-	-	-	-	-	-
10	39900.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

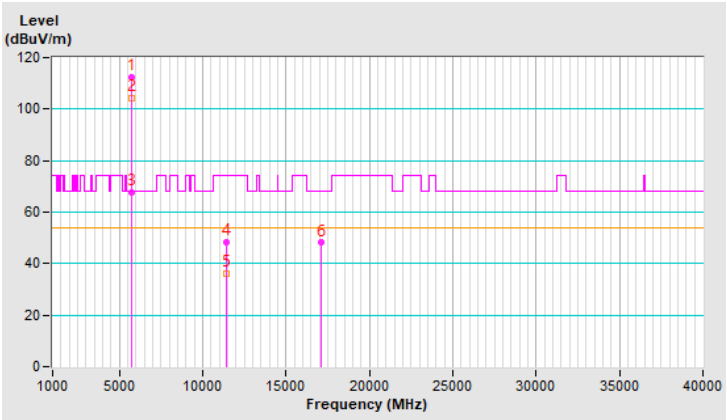


操 作 模 式 ：	發射	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 144：5.72 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=10Hz
量 測 場 地 溫 度 ：	24℃	量 測 場 地 濕 度 ：	68%RH
測 試 日 期 ：	109 年 5 月 17 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	53.7 PK	74.0	-20.3	1.58 H	328	49.9	3.8
2	5460.00	42.0 AV	54.0	-12.0	1.58 H	328	38.2	3.8
3	#5470.00	52.7 PK	68.2	-15.5	1.58 H	328	48.8	3.9
4	*5720.00	120.1 PK			1.58 H	328	116.2	3.9
5	*5720.00	110.7 AV			1.58 H	328	106.8	3.9
6	#5850.00	54.8 PK	68.2	-13.4	1.58 H	328	50.4	4.4
7	11440.00	46.8 PK	74.0	-27.2	1.77 H	204	33.5	13.3
8	11440.00	35.0 AV	54.0	-19.0	1.77 H	204	21.7	13.3
9	#17160.00	45.3 PK	68.2	-22.9	3.21 H	145	27.9	17.4
10	22880.00	-	-	-	-	-	-	-
11	#28600.00	-	-	-	-	-	-	-
12	#34320.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

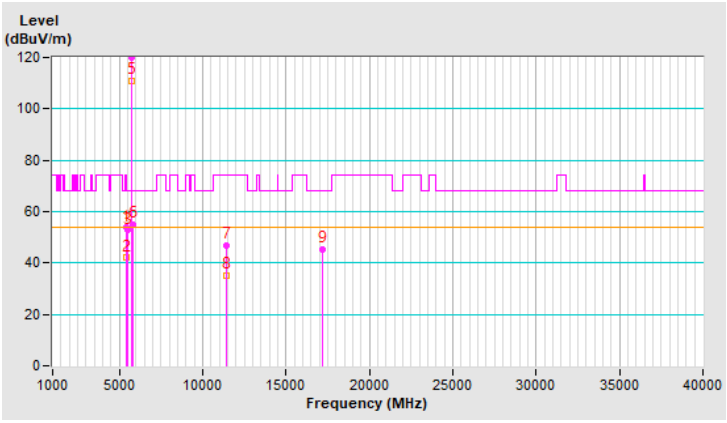


操 作 模 式 ：	發射	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 144：5.72 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=10Hz
量 測 場 地 溫 度 ：	24℃	量 測 場 地 濕 度 ：	68%RH
測 試 日 期 ：	109 年 5 月 17 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	54.9 PK	74.0	-19.1	3.43 V	355	51.1	3.8
2	5460.00	43.7 AV	54.0	-10.3	3.43 V	355	39.9	3.8
3	#5470.00	54.3 PK	68.2	-13.9	3.43 V	355	50.4	3.9
4	*5720.00	120.5 PK			3.43 V	355	116.6	3.9
5	*5720.00	111.3 AV			3.43 V	355	107.4	3.9
6	#5850.00	56.5 PK	68.2	-11.7	3.43 V	355	52.1	4.4
7	11440.00	47.2 PK	74.0	-26.8	1.78 V	119	33.9	13.3
8	11440.00	35.5 AV	54.0	-18.5	1.78 V	119	22.2	13.3
9	#17160.00	48.4 PK	68.2	-19.8	1.66 V	222	31.0	17.4
10	22880.00	-	-	-	-	-	-	-
11	#28600.00	-	-	-	-	-	-	-
12	#34320.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

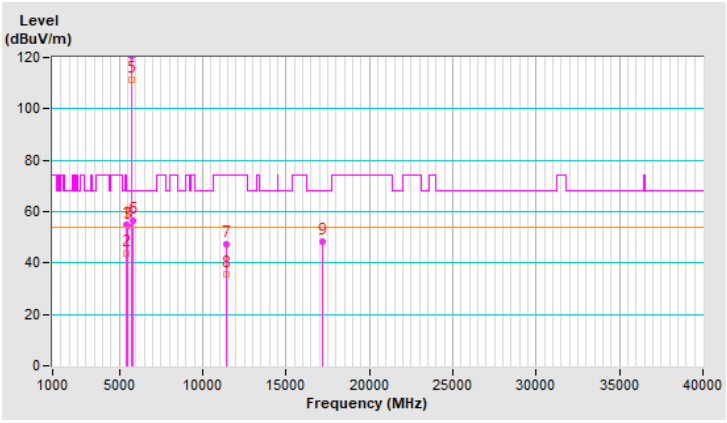


操 作 模 式 ：	發射	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 149：5.745 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=10Hz
量 測 場 地 溫 度 ：	24℃	量 測 場 地 濕 度 ：	68%RH
測 試 日 期 ：	109 年 5 月 30 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5745.00	117.8 PK			1.79 H	328	113.8	4.0
2	*5745.00	108.6 AV			1.79 H	328	104.6	4.0
3	11490.00	48.6 PK	74.0	-25.4	1.80 H	176	35.3	13.3
4	11490.00	38.5 AV	54.0	-15.5	1.80 H	176	25.2	13.3
5	#17235.00	62.7 PK	68.2	-5.5	1.10 H	327	45.1	17.6
6	22980.00	-	-	-	-	-	-	-
7	#28725.00	-	-	-	-	-	-	-
8	#34470.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

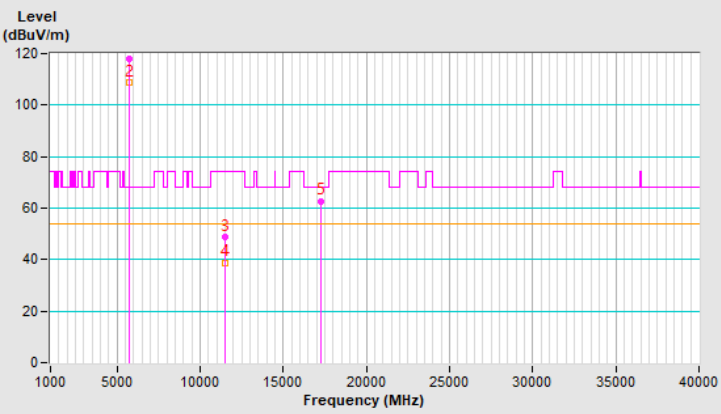


操 作 模 式 ：	發射	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 149：5.745 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=10Hz
量 測 場 地 溫 度 ：	24℃	量 測 場 地 濕 度 ：	68%RH
測 試 日 期 ：	109 年 5 月 30 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5745.00	117.5 PK			3.87 V	331	113.5	4.0
2	*5745.00	108.2 AV			3.87 V	331	104.2	4.0
3	11490.00	49.7 PK	74.0	-24.3	1.13 V	108	36.4	13.3
4	11490.00	39.4 AV	54.0	-14.6	1.13 V	108	26.1	13.3
5	#17235.00	67.5 PK	68.2	-0.7	1.13 V	67	49.9	17.6
6	22980.00	-	-	-	-	-	-	-
7	#28725.00	-	-	-	-	-	-	-
8	#34470.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

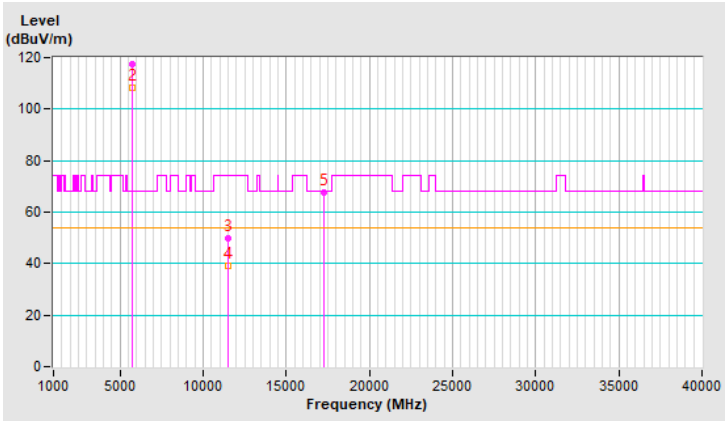


操 作 模 式 ：	發射	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 157：5.785 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=10Hz
量 測 場 地 溫 度 ：	24℃	量 測 場 地 濕 度 ：	68%RH
測 試 日 期 ：	109 年 5 月 30 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5785.00	117.6 PK			1.64 H	333	113.5	4.1
2	*5785.00	108.0 AV			1.64 H	333	103.9	4.1
3	11570.00	49.1 PK	74.0	-24.9	1.78 H	189	35.9	13.2
4	11570.00	38.7 AV	54.0	-15.3	1.78 H	189	25.5	13.2
5	#17355.00	63.4 PK	68.2	-4.8	1.12 H	324	45.8	17.6
6	#23140.00	-	-	-	-	-	-	-
7	#28925.00	-	-	-	-	-	-	-
8	#34710.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

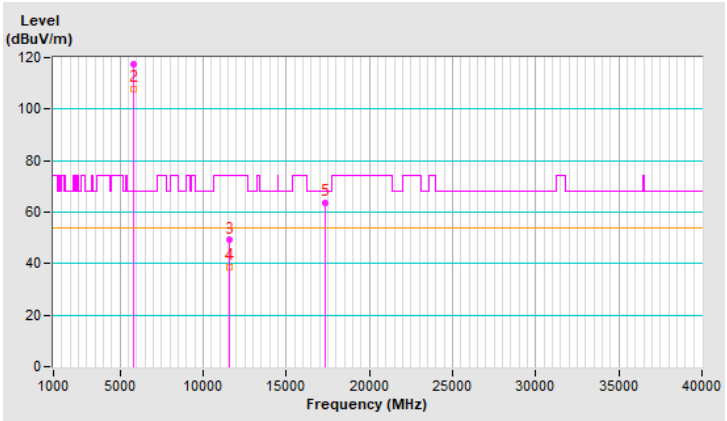


操 作 模 式 ：	發射	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 157：5.785 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=10Hz
量 測 場 地 溫 度 ：	24℃	量 測 場 地 濕 度 ：	68%RH
測 試 日 期 ：	109 年 5 月 30 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5785.00	116.5 PK			3.01 V	35	112.4	4.1
2	*5785.00	107.6 AV			3.01 V	35	103.5	4.1
3	11570.00	49.5 PK	74.0	-24.5	1.12 V	123	36.3	13.2
4	11570.00	39.0 AV	54.0	-15.0	1.12 V	123	25.8	13.2
5	#17355.00	67.6 PK	68.2	-0.6	1.07 V	67	50.0	17.6
6	#23140.00	-	-	-	-	-	-	-
7	#28925.00	-	-	-	-	-	-	-
8	#34710.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

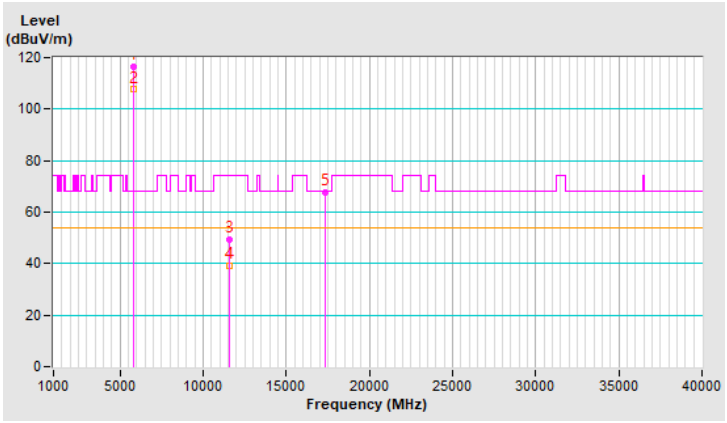


操 作 模 式 ：	發射	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 165：5.825 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=10Hz
量 測 場 地 溫 度 ：	24℃	量 測 場 地 濕 度 ：	68%RH
測 試 日 期 ：	109 年 5 月 30 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5825.00	118.1 PK			1.50 H	325	113.8	4.3
2	*5825.00	108.7 AV			1.50 H	325	104.4	4.3
3	11650.00	49.4 PK	74.0	-24.6	1.83 H	185	36.1	13.3
4	11650.00	38.9 AV	54.0	-15.1	1.83 H	185	25.6	13.3
5	#17475.00	63.1 PK	68.2	-5.1	1.20 H	325	45.2	17.9
6	#23300.00	-	-	-	-	-	-	-
7	#29125.00	-	-	-	-	-	-	-
8	#34950.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

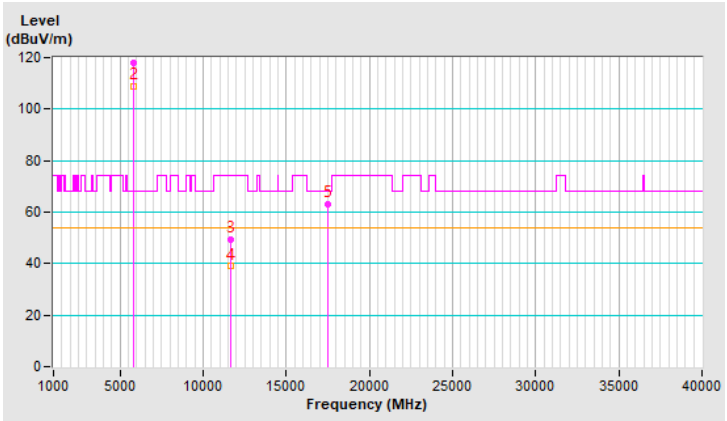


操 作 模 式 ：	發射	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 165：5.825 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=10Hz
量 測 場 地 溫 度 ：	24℃	量 測 場 地 濕 度 ：	68%RH
測 試 日 期 ：	109 年 5 月 30 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5825.00	117.2 PK			3.92 V	330	112.9	4.3
2	*5825.00	107.9 AV			3.92 V	330	103.6	4.3
3	11650.00	49.9 PK	74.0	-24.1	1.14 V	98	36.6	13.3
4	11650.00	39.9 AV	54.0	-14.1	1.14 V	98	26.6	13.3
5	#17475.00	68.0 PK	68.2	-0.2	1.00 V	30	50.1	17.9
6	#23300.00	-	-	-	-	-	-	-
7	#29125.00	-	-	-	-	-	-	-
8	#34950.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

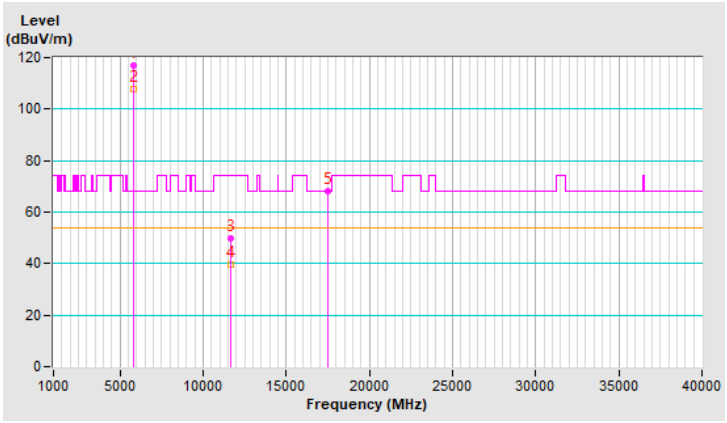


802.11ax (HE20)

操作模式：	發射	調變技術：	OFDMA
基本波頻率：	CH 36：5.18 GHz	測試儀器：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量測場地溫度：	24℃	量測場地濕度：	68%RH
測試日期：	109 年 5 月 30 日	測試者：	楊立豪

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	69.7 PK	74.0	-4.3	1.49 H	320	66.0	3.7
2	5150.00	53.3 AV	54.0	-0.7	1.49 H	320	49.6	3.7
3	*5180.00	116.6 PK			1.49 H	320	113.0	3.6
4	*5180.00	105.2 AV			1.49 H	320	101.6	3.6
5	#10360.00	46.7 PK	68.2	-21.5	1.84 H	166	34.0	12.7
6	15540.00	50.9 PK	74.0	-23.1	1.18 H	314	37.7	13.2
7	15540.00	38.5 AV	54.0	-15.5	1.18 H	314	25.3	13.2
8	20720.00	-	-	-	-	-	-	-
9	#25900.00	-	-	-	-	-	-	-
10	#31080.00	-	-	-	-	-	-	-
11	#36260.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

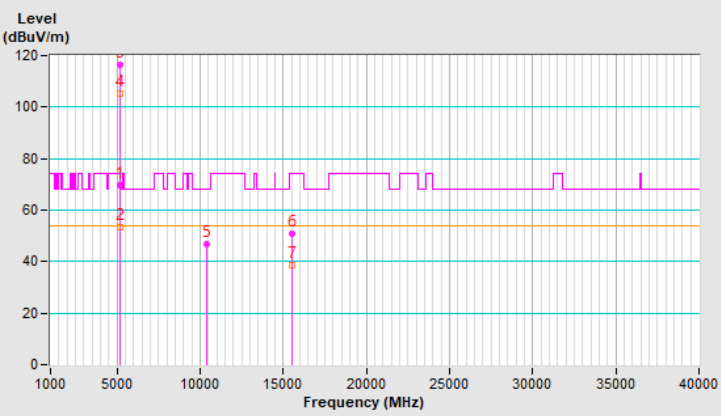


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 36：5.18 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	24℃	量 測 場 地 濕 度 ：	68%RH
測 試 日 期 ：	109 年 5 月 30 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	69.2 PK	74.0	-4.8	1.56 V	359	65.5	3.7
2	5150.00	53.5 AV	54.0	-0.5	1.56 V	359	49.8	3.7
3	*5180.00	116.5 PK			1.56 V	359	112.9	3.6
4	*5180.00	104.5 AV			1.56 V	359	100.9	3.6
5	#10360.00	45.8 PK	68.2	-22.4	1.13 V	94	33.1	12.7
6	15540.00	56.6 PK	74.0	-17.4	1.10 V	82	43.4	13.2
7	15540.00	43.3 AV	54.0	-10.7	1.10 V	82	30.1	13.2
8	20720.00	-	-	-	-	-	-	-
9	#25900.00	-	-	-	-	-	-	-
10	#31080.00	-	-	-	-	-	-	-
11	#36260.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

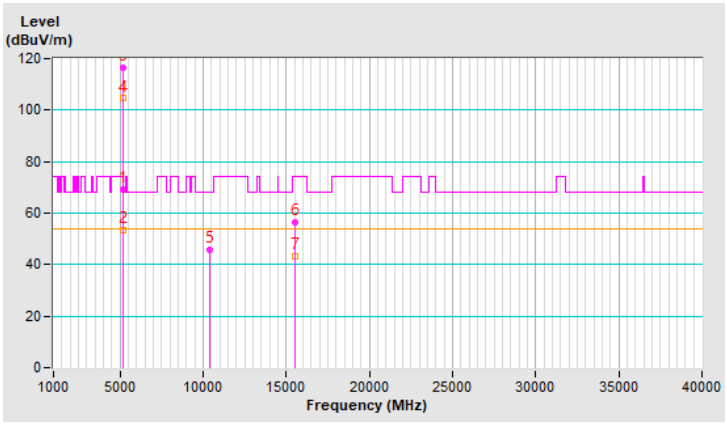


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 40：5.2 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	24℃	量 測 場 地 濕 度 ：	68%RH
測 試 日 期 ：	109 年 5 月 30 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5200.00	119.9 PK			1.55 H	301	116.4	3.5
2	*5200.00	108.1 AV			1.55 H	301	104.6	3.5
3	#10400.00	46.9 PK	68.2	-21.3	1.89 H	177	34.1	12.8
4	15600.00	50.7 PK	74.0	-23.3	1.05 H	313	37.2	13.5
5	15600.00	40.1 AV	54.0	-13.9	1.05 H	313	26.6	13.5
6	20800.00	-	-	-	-	-	-	-
7	#26000.00	-	-	-	-	-	-	-
8	31200.00	-	-	-	-	-	-	-
9	#36400.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

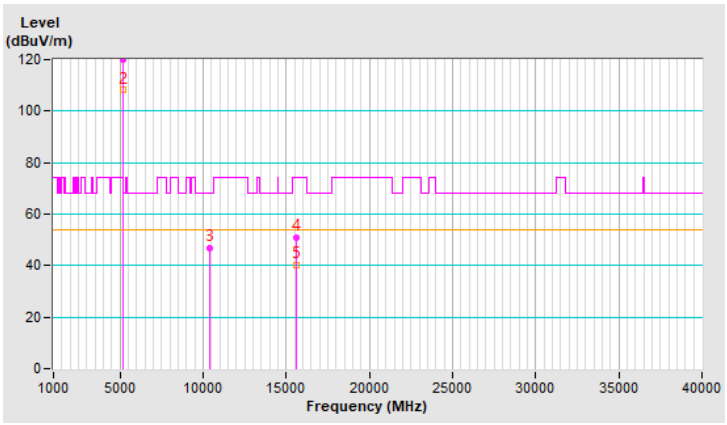


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 40：5.2 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	24℃	量 測 場 地 濕 度 ：	68%RH
測 試 日 期 ：	109 年 5 月 30 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5200.00	118.6 PK			1.52 V	360	115.1	3.5
2	*5200.00	108.7 AV			1.52 V	360	105.2	3.5
3	#10400.00	46.3 PK	68.2	-21.9	1.08 V	101	33.5	12.8
4	15600.00	57.2 PK	74.0	-16.8	1.11 V	81	43.7	13.5
5	15600.00	43.8 AV	54.0	-10.2	1.11 V	81	30.3	13.5
6	20800.00	-	-	-	-	-	-	-
7	#26000.00	-	-	-	-	-	-	-
8	31200.00	-	-	-	-	-	-	-
9	#36400.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

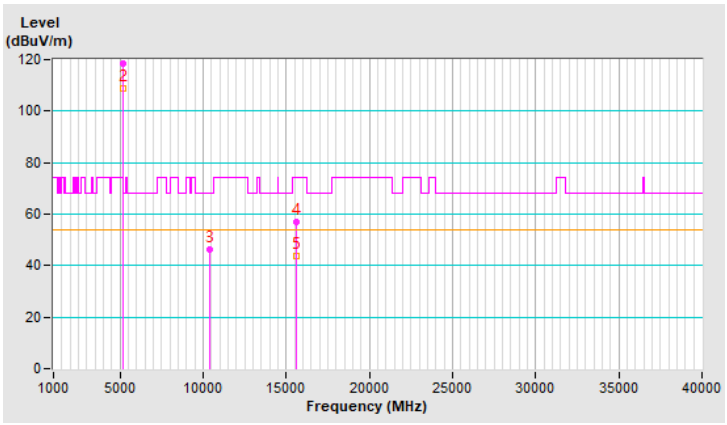


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 48：5.24 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	24℃	量 測 場 地 濕 度 ：	68%RH
測 試 日 期 ：	109 年 5 月 30 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5240.00	120.5 PK			1.53 H	313	117.0	3.5
2	*5240.00	108.5 AV			1.53 H	313	105.0	3.5
3	5350.00	53.4 PK	74.0	-20.6	1.53 H	313	50.0	3.4
4	5350.00	41.7 AV	54.0	-12.3	1.53 H	313	38.3	3.4
5	#10480.00	46.5 PK	68.2	-21.7	1.89 H	145	33.4	13.1
6	15720.00	51.0 PK	74.0	-23.0	1.09 H	301	37.2	13.8
7	15720.00	38.3 AV	54.0	-15.7	1.09 H	301	24.5	13.8
8	20960.00	-	-	-	-	-	-	-
9	#26200.00	-	-	-	-	-	-	-
10	31440.00	-	-	-	-	-	-	-
11	#36680.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

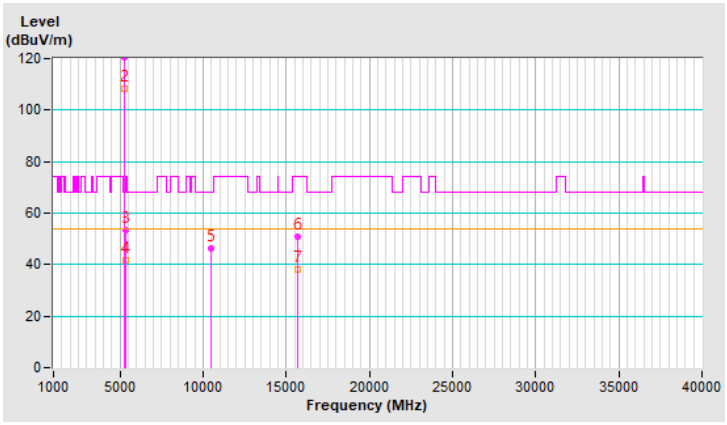


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 48：5.24 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	24℃	量 測 場 地 濕 度 ：	68%RH
測 試 日 期 ：	109 年 5 月 30 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5240.00	118.6 PK			1.49 V	359	115.1	3.5
2	*5240.00	108.4 AV			1.49 V	359	104.9	3.5
3	5350.00	51.1 PK	74.0	-22.9	1.49 V	359	47.7	3.4
4	5350.00	41.1 AV	54.0	-12.9	1.49 V	359	37.7	3.4
5	#10480.00	46.3 PK	68.2	-21.9	1.13 V	102	33.2	13.1
6	15720.00	56.9 PK	74.0	-17.1	1.12 V	67	43.1	13.8
7	15720.00	43.7 AV	54.0	-10.3	1.12 V	67	29.9	13.8
8	20960.00	-	-	-	-	-	-	-
9	#26200.00	-	-	-	-	-	-	-
10	31440.00	-	-	-	-	-	-	-
11	#36680.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

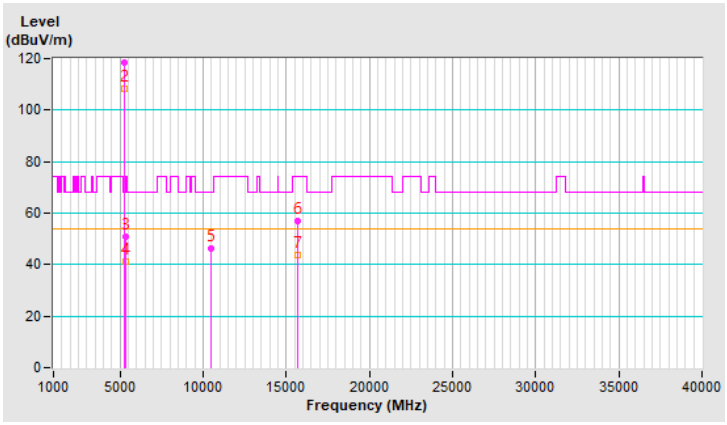


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 52：5.26 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	24℃	量 測 場 地 濕 度 ：	68%RH
測 試 日 期 ：	109 年 5 月 17 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	55.5 PK	74.0	-18.5	1.60 H	311	51.8	3.7
2	5150.00	44.4 AV	54.0	-9.6	1.60 H	311	40.7	3.7
3	*5260.00	121.4 PK			1.60 H	311	118.0	3.4
4	*5260.00	110.2 AV			1.60 H	311	106.8	3.4
5	#10520.00	46.7 PK	68.2	-21.5	1.86 H	253	33.6	13.1
6	15780.00	46.3 PK	74.0	-27.7	3.17 H	152	32.8	13.5
7	15780.00	34.7 AV	54.0	-19.3	3.17 H	152	21.2	13.5
8	21040.00	-	-	-	-	-	-	-
9	#26300.00	-	-	-	-	-	-	-
10	31560.00	-	-	-	-	-	-	-
11	#36820.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

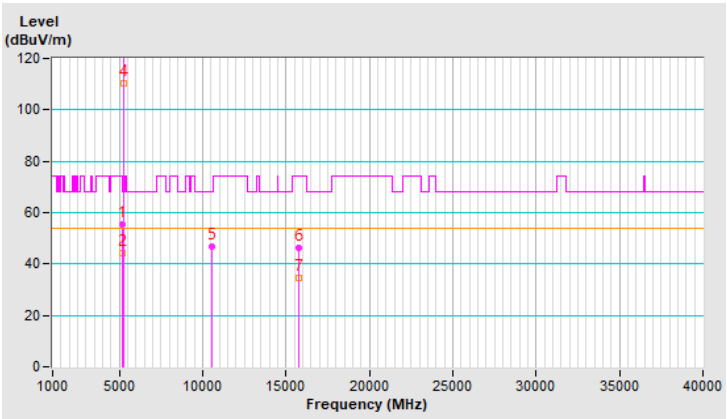


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 52：5.26 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	24℃	量 測 場 地 濕 度 ：	68%RH
測 試 日 期 ：	109 年 5 月 17 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	55.3 PK	74.0	-18.7	3.32 V	356	51.6	3.7
2	5150.00	44.3 AV	54.0	-9.7	3.32 V	356	40.6	3.7
3	*5260.00	119.8 PK			3.32 V	356	116.4	3.4
4	*5260.00	110.4 AV			3.32 V	356	107.0	3.4
5	#10520.00	46.9 PK	68.2	-21.3	1.74 V	109	33.8	13.1
6	15780.00	47.3 PK	74.0	-26.7	1.63 V	201	33.8	13.5
7	15780.00	36.7 AV	54.0	-17.3	1.63 V	201	23.2	13.5
8	21040.00	-	-	-	-	-	-	-
9	#26300.00	-	-	-	-	-	-	-
10	31560.00	-	-	-	-	-	-	-
11	#36820.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

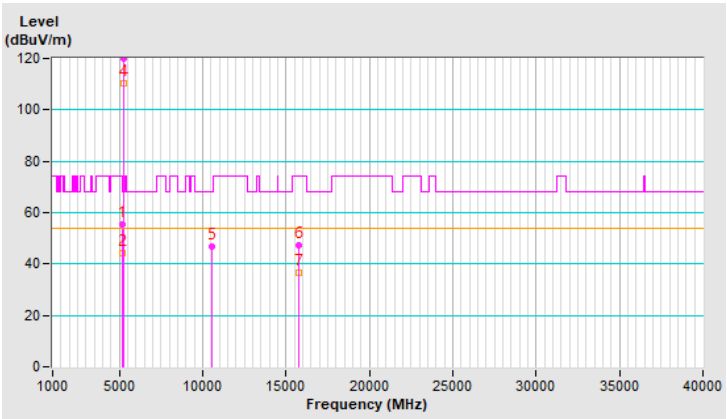


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 60：5.3 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	24℃	量 測 場 地 濕 度 ：	68%RH
測 試 日 期 ：	109 年 5 月 17 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5300.00	121.7 PK			1.73 H	313	118.4	3.3
2	*5300.00	110.0 AV			1.73 H	313	106.7	3.3
3	10600.00	47.0 PK	74.0	-27.0	1.76 H	227	34.1	12.9
4	10600.00	35.2 AV	54.0	-18.8	1.76 H	227	22.3	12.9
5	15900.00	46.2 PK	74.0	-27.8	3.07 H	151	33.4	12.8
6	15900.00	35.0 AV	54.0	-19.0	3.07 H	151	22.2	12.8
7	21200.00	-	-	-	-	-	-	-
8	#26500.00	-	-	-	-	-	-	-
9	31800.00	-	-	-	-	-	-	-
10	#37100.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

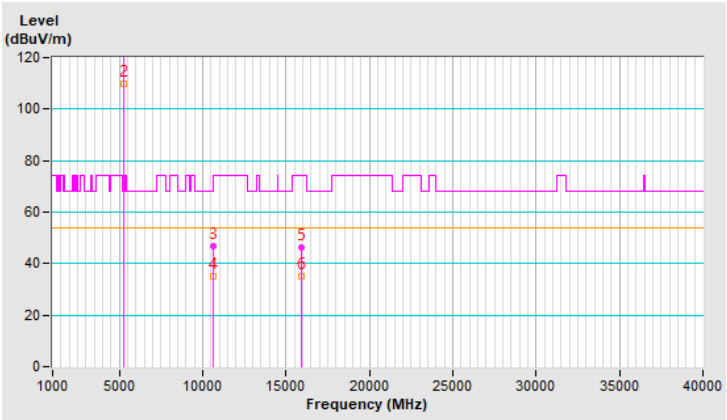


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 60：5.3 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	24℃	量 測 場 地 濕 度 ：	68%RH
測 試 日 期 ：	109 年 5 月 17 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5300.00	120.0 PK			3.31 V	351	116.7	3.3
2	*5300.00	110.4 AV			3.31 V	351	107.1	3.3
3	10600.00	46.6 PK	74.0	-27.4	1.77 V	112	33.7	12.9
4	10600.00	35.5 AV	54.0	-18.5	1.77 V	112	22.6	12.9
5	15900.00	47.7 PK	74.0	-26.3	1.52 V	230	34.9	12.8
6	15900.00	36.9 AV	54.0	-17.1	1.52 V	230	24.1	12.8
7	21200.00	-	-	-	-	-	-	-
8	#26500.00	-	-	-	-	-	-	-
9	31800.00	-	-	-	-	-	-	-
10	#37100.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

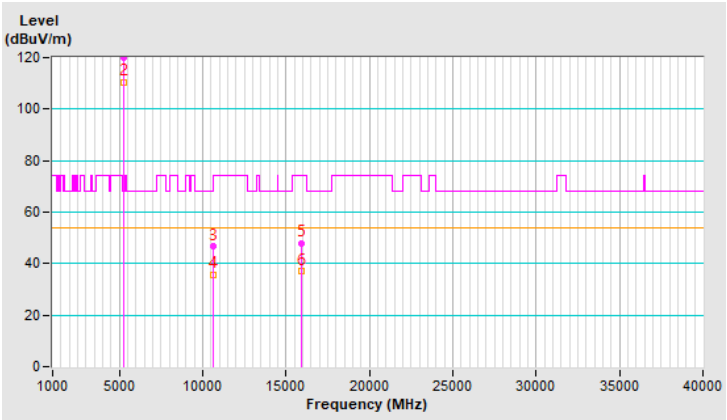


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 64：5.32 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	24℃	量 測 場 地 濕 度 ：	68%RH
測 試 日 期 ：	109 年 5 月 17 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5320.00	117.4 PK			1.59 H	314	114.0	3.4
2	*5320.00	105.5 AV			1.59 H	314	102.1	3.4
3	5350.00	68.9 PK	74.0	-5.1	1.59 H	314	65.5	3.4
4	5350.00	51.9 AV	54.0	-2.1	1.59 H	314	48.5	3.4
5	10640.00	47.2 PK	74.0	-26.8	1.91 H	247	34.3	12.9
6	10640.00	35.3 AV	54.0	-18.7	1.91 H	247	22.4	12.9
7	15960.00	45.1 PK	74.0	-28.9	3.04 H	150	32.3	12.8
8	15960.00	35.4 AV	54.0	-18.6	3.04 H	150	22.6	12.8
9	21280.00	-	-	-	-	-	-	-
10	#26600.00	-	-	-	-	-	-	-
11	#31920.00	-	-	-	-	-	-	-
12	#37240.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

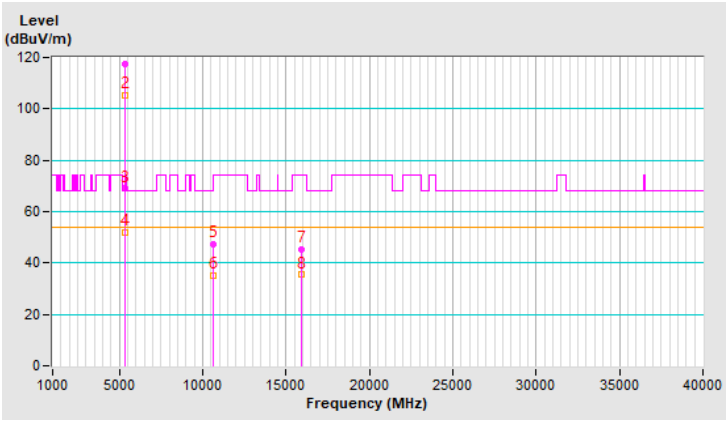


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 64：5.32 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	24℃	量 測 場 地 濕 度 ：	68%RH
測 試 日 期 ：	109 年 5 月 17 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5320.00	116.5 PK			3.50 V	360	113.1	3.4
2	*5320.00	106.3 AV			3.50 V	360	102.9	3.4
3	5350.00	70.8 PK	74.0	-3.2	3.50 V	360	67.4	3.4
4	5350.00	53.6 AV	54.0	-0.4	3.50 V	360	50.2	3.4
5	10640.00	46.9 PK	74.0	-27.1	1.81 V	121	34.0	12.9
6	10640.00	35.6 AV	54.0	-18.4	1.81 V	121	22.7	12.9
7	15960.00	47.0 PK	74.0	-27.0	1.57 V	241	34.2	12.8
8	15960.00	36.4 AV	54.0	-17.6	1.57 V	241	23.6	12.8
9	21280.00	-	-	-	-	-	-	-
10	#26600.00	-	-	-	-	-	-	-
11	#31920.00	-	-	-	-	-	-	-
12	#37240.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

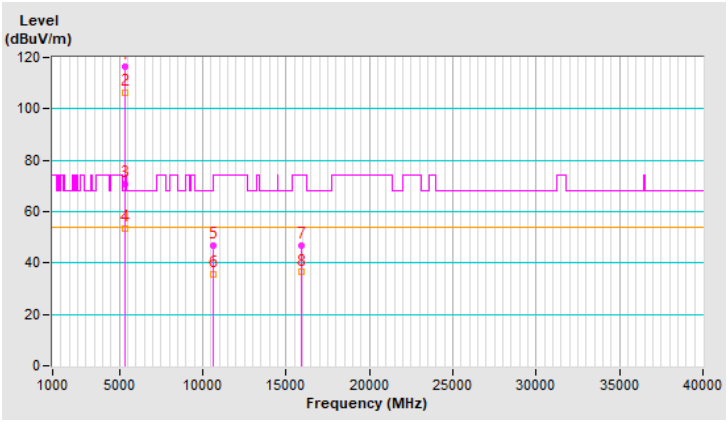


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 100：5.5 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	24℃	量 測 場 地 濕 度 ：	68%RH
測 試 日 期 ：	109 年 5 月 17 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	53.7 PK	74.0	-20.3	1.77 H	322	49.9	3.8
2	5460.00	42.2 AV	54.0	-11.8	1.77 H	322	38.4	3.8
3	#5470.00	64.5 PK	68.2	-3.7	1.77 H	322	60.6	3.9
4	*5500.00	113.9 PK			1.77 H	322	110.0	3.9
5	*5500.00	103.0 AV			1.77 H	322	99.1	3.9
6	11000.00	46.8 PK	74.0	-27.2	1.78 H	232	33.8	13.0
7	11000.00	34.7 AV	54.0	-19.3	1.78 H	232	21.7	13.0
8	#16500.00	45.9 PK	68.2	-22.3	3.09 H	153	31.3	14.6
9	#22000.00	-	-	-	-	-	-	-
10	#27500.00	-	-	-	-	-	-	-
11	#33000.00	-	-	-	-	-	-	-
12	#38500.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

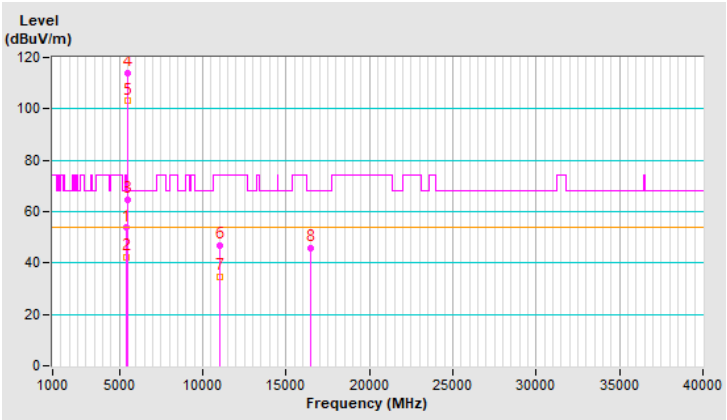


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 100：5.5 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	24℃	量 測 場 地 濕 度 ：	68%RH
測 試 日 期 ：	109 年 5 月 17 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	55.0 PK	74.0	-19.0	3.13 V	359	51.2	3.8
2	5460.00	43.4 AV	54.0	-10.6	3.13 V	359	39.6	3.8
3	#5470.00	67.8 PK	68.2	-0.4	3.13 V	359	63.9	3.9
4	*5500.00	114.8 PK			3.13 V	359	110.9	3.9
5	*5500.00	103.6 AV			3.13 V	359	99.7	3.9
6	11000.00	46.5 PK	74.0	-27.5	1.76 V	115	33.5	13.0
7	11000.00	35.3 AV	54.0	-18.7	1.76 V	115	22.3	13.0
8	#16500.00	47.2 PK	68.2	-21.0	1.47 V	237	32.6	14.6
9	#22000.00	-	-	-	-	-	-	-
10	#27500.00	-	-	-	-	-	-	-
11	#33000.00	-	-	-	-	-	-	-
12	#38500.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

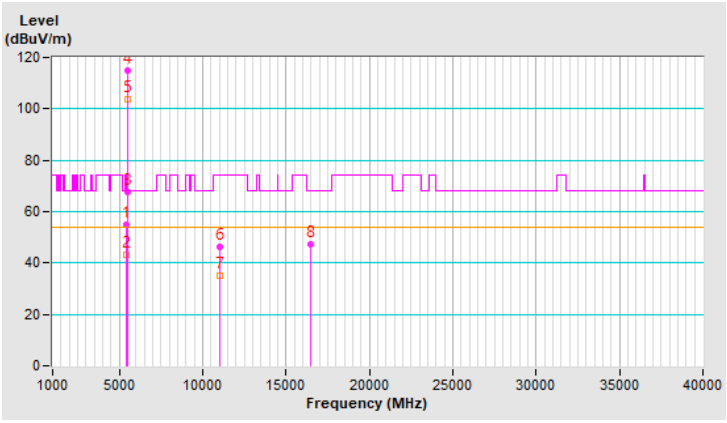


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 116：5.58 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	24℃	量 測 場 地 濕 度 ：	68%RH
測 試 日 期 ：	109 年 5 月 17 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5580.00	121.7 PK			1.78 H	323	117.9	3.8
2	*5580.00	110.3 AV			1.78 H	323	106.5	3.8
3	11160.00	46.9 PK	74.0	-27.1	1.74 H	230	33.8	13.1
4	11160.00	34.8 AV	54.0	-19.2	1.74 H	230	21.7	13.1
5	#16740.00	46.7 PK	68.2	-21.5	3.11 H	145	30.5	16.2
6	22320.00	-	-	-	-	-	-	-
7	#27900.00	-	-	-	-	-	-	-
8	#33480.00	-	-	-	-	-	-	-
9	39060.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

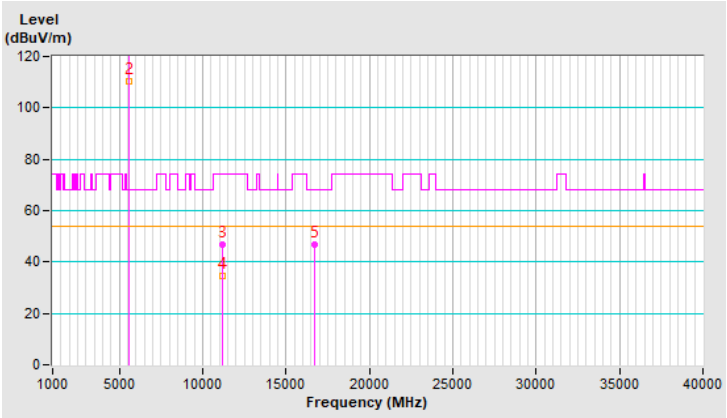


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 116：5.58 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	24℃	量 測 場 地 濕 度 ：	68%RH
測 試 日 期 ：	109 年 5 月 17 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5580.00	120.0 PK			3.35 V	341	116.2	3.8
2	*5580.00	110.6 AV			3.35 V	341	106.8	3.8
3	11160.00	47.3 PK	74.0	-26.7	1.79 V	135	34.2	13.1
4	11160.00	35.9 AV	54.0	-18.1	1.79 V	135	22.8	13.1
5	#16740.00	48.0 PK	68.2	-20.2	1.58 V	256	31.8	16.2
6	22320.00	-	-	-	-	-	-	-
7	#27900.00	-	-	-	-	-	-	-
8	#33480.00	-	-	-	-	-	-	-
9	39060.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

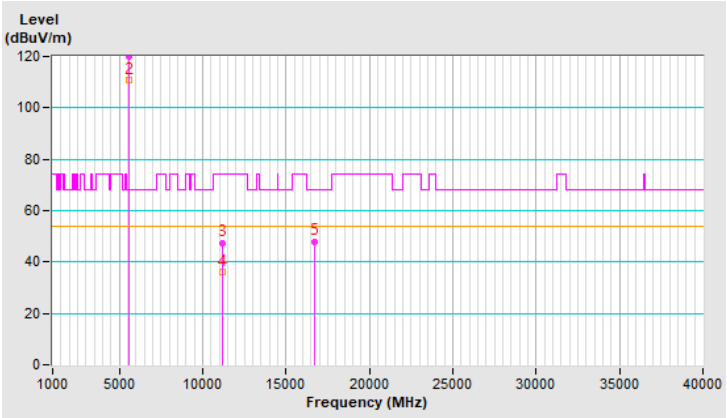


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 140：5.7 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	24℃	量 測 場 地 濕 度 ：	68%RH
測 試 日 期 ：	109 年 5 月 17 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5700.00	115.3 PK			1.55 H	321	111.3	4.0
2	*5700.00	103.5 AV			1.55 H	321	99.5	4.0
3	#5725.00	66.1 PK	68.2	-2.1	1.55 H	321	62.1	4.0
4	11400.00	46.9 PK	74.0	-27.1	1.74 H	235	33.7	13.2
5	11400.00	35.0 AV	54.0	-19.0	1.74 H	235	21.8	13.2
6	#17100.00	45.8 PK	68.2	-22.4	3.10 H	153	28.6	17.2
7	22800.00	-	-	-	-	-	-	-
8	#28500.00	-	-	-	-	-	-	-
9	#34200.00	-	-	-	-	-	-	-
10	39900.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

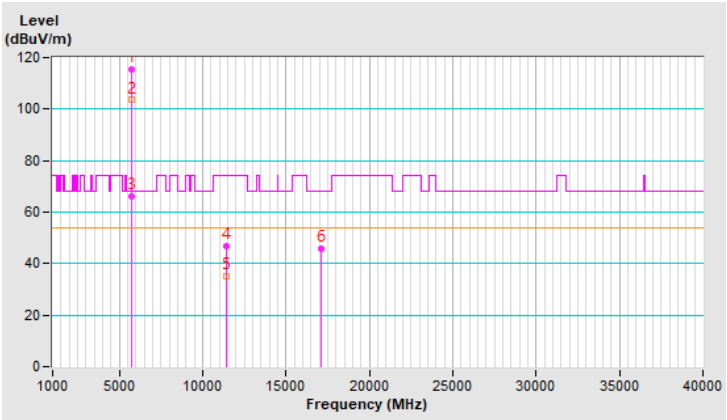


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 140：5.7 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	24℃	量 測 場 地 濕 度 ：	68%RH
測 試 日 期 ：	109 年 5 月 17 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5700.00	115.2 PK			3.94 V	1	111.2	4.0
2	*5700.00	103.5 AV			3.94 V	1	99.5	4.0
3	#5725.00	67.9 PK	68.2	-0.3	3.94 V	1	63.9	4.0
4	11400.00	46.8 PK	74.0	-27.2	1.64 V	123	33.6	13.2
5	11400.00	35.5 AV	54.0	-18.5	1.64 V	123	22.3	13.2
6	#17100.00	47.6 PK	68.2	-20.6	1.57 V	214	30.4	17.2
7	22800.00	-	-	-	-	-	-	-
8	#28500.00	-	-	-	-	-	-	-
9	#34200.00	-	-	-	-	-	-	-
10	39900.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

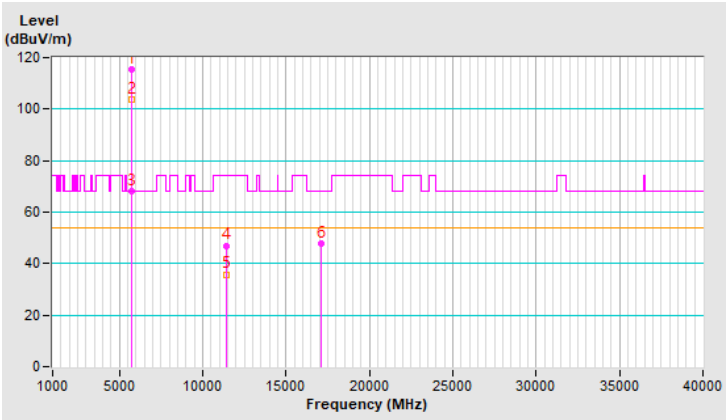


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 144：5.72 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	24℃	量 測 場 地 濕 度 ：	68%RH
測 試 日 期 ：	109 年 5 月 17 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	54.3 PK	74.0	-19.7	1.63 H	315	50.5	3.8
2	5460.00	42.4 AV	54.0	-11.6	1.63 H	315	38.6	3.8
3	#5470.00	53.1 PK	68.2	-15.1	1.63 H	315	49.2	3.9
4	*5720.00	120.4 PK			1.63 H	315	116.5	3.9
5	*5720.00	110.3 AV			1.63 H	315	106.4	3.9
6	#5850.00	54.5 PK	68.2	-13.7	1.63 H	315	50.1	4.4
7	11440.00	47.1 PK	74.0	-26.9	1.94 H	252	33.8	13.3
8	11440.00	34.9 AV	54.0	-19.1	1.94 H	252	21.6	13.3
9	#17160.00	47.0 PK	68.2	-21.2	3.03 H	160	29.6	17.4
10	22880.00	-	-	-	-	-	-	-
11	#28600.00	-	-	-	-	-	-	-
12	#34320.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

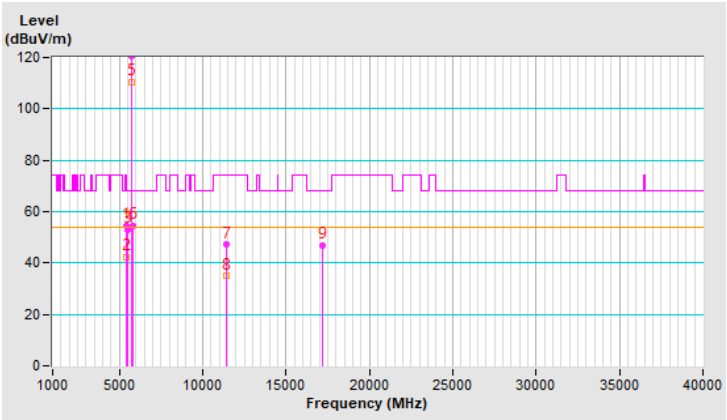


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 144：5.72 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	24℃	量 測 場 地 濕 度 ：	68%RH
測 試 日 期 ：	109 年 5 月 17 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	54.6 PK	74.0	-19.4	3.53 V	349	50.8	3.8
2	5460.00	43.6 AV	54.0	-10.4	3.53 V	349	39.8	3.8
3	#5470.00	54.4 PK	68.2	-13.8	3.53 V	349	50.5	3.9
4	*5720.00	120.5 PK			3.53 V	349	116.6	3.9
5	*5720.00	110.9 AV			3.53 V	349	107.0	3.9
6	#5850.00	56.2 PK	68.2	-12.0	3.53 V	349	51.8	4.4
7	11440.00	45.9 PK	74.0	-28.1	1.70 V	128	32.6	13.3
8	11440.00	35.0 AV	54.0	-19.0	1.70 V	128	21.7	13.3
9	#17160.00	47.9 PK	68.2	-20.3	1.45 V	244	30.5	17.4
10	22880.00	-	-	-	-	-	-	-
11	#28600.00	-	-	-	-	-	-	-
12	#34320.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

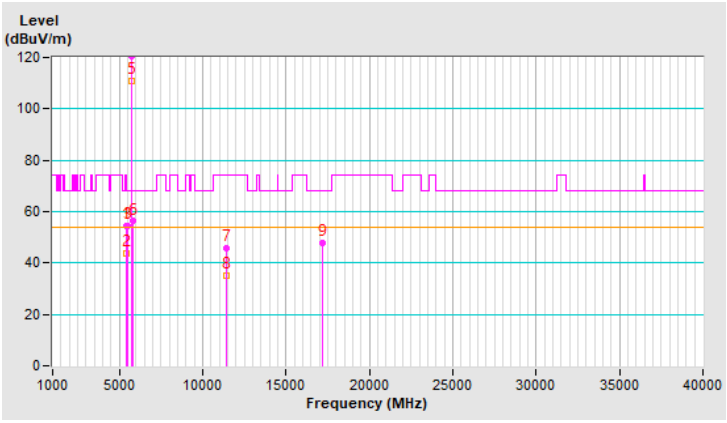


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 149：5.745 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	24℃	量 測 場 地 濕 度 ：	68%RH
測 試 日 期 ：	109 年 5 月 30 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5745.00	119.8 PK			1.54 H	315	115.8	4.0
2	*5745.00	107.8 AV			1.54 H	315	103.8	4.0
3	11490.00	50.1 PK	74.0	-23.9	1.81 H	179	36.8	13.3
4	11490.00	39.3 AV	54.0	-14.7	1.81 H	179	26.0	13.3
5	#17235.00	63.3 PK	68.2	-4.9	1.20 H	337	45.7	17.6
6	22980.00	-	-	-	-	-	-	-
7	#28725.00	-	-	-	-	-	-	-
8	#34470.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

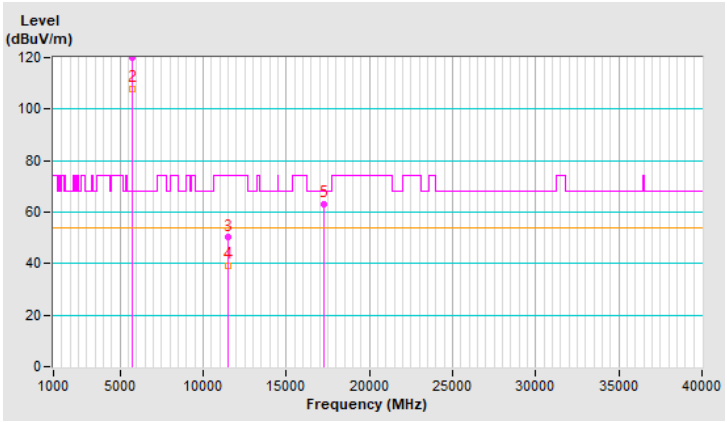


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 149：5.745 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	24℃	量 測 場 地 濕 度 ：	68%RH
測 試 日 期 ：	109 年 5 月 30 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5745.00	119.2 PK			2.88 V	332	115.2	4.0
2	*5745.00	107.8 AV			2.88 V	332	103.8	4.0
3	11490.00	49.9 PK	74.0	-24.1	1.16 V	90	36.6	13.3
4	11490.00	40.1 AV	54.0	-13.9	1.16 V	90	26.8	13.3
5	#17235.00	67.7 PK	68.2	-0.5	1.20 V	70	50.1	17.6
6	22980.00	-	-	-	-	-	-	-
7	#28725.00	-	-	-	-	-	-	-
8	#34470.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

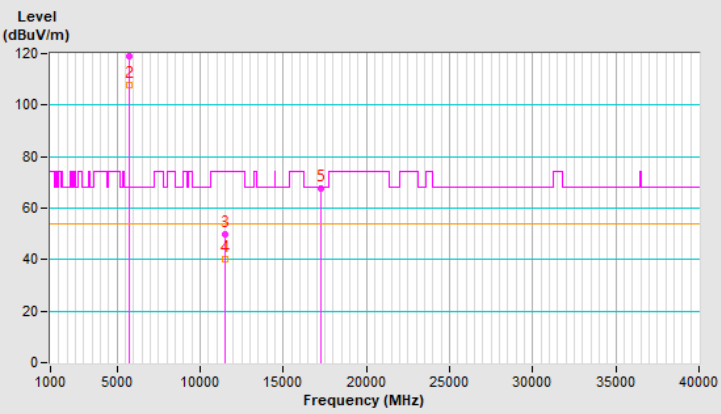


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 157：5.785 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	24℃	量 測 場 地 濕 度 ：	68%RH
測 試 日 期 ：	109 年 5 月 30 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5785.00	119.6 PK			1.61 H	319	115.5	4.1
2	*5785.00	107.5 AV			1.61 H	319	103.4	4.1
3	11570.00	49.6 PK	74.0	-24.4	1.83 H	171	36.4	13.2
4	11570.00	39.4 AV	54.0	-14.6	1.83 H	171	26.2	13.2
5	#17355.00	63.0 PK	68.2	-5.2	1.19 H	333	45.4	17.6
6	#23140.00	-	-	-	-	-	-	-
7	#28925.00	-	-	-	-	-	-	-
8	#34710.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

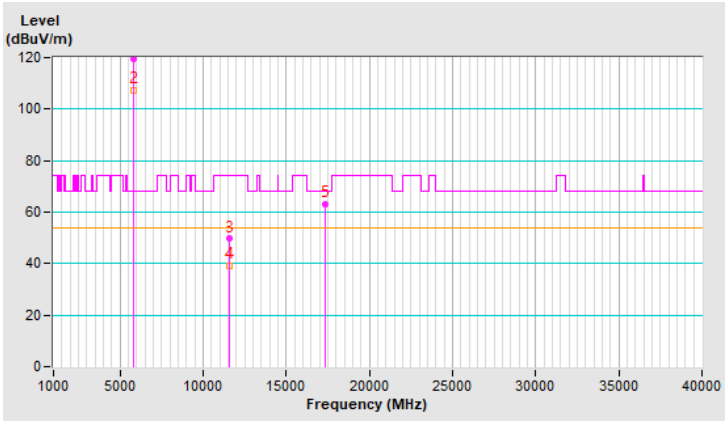


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 157：5.785 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	24℃	量 測 場 地 濕 度 ：	68%RH
測 試 日 期 ：	109 年 5 月 30 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5785.00	118.6 PK			2.70 V	21	114.5	4.1
2	*5785.00	107.5 AV			2.70 V	21	103.4	4.1
3	11570.00	49.4 PK	74.0	-24.6	1.16 V	80	36.2	13.2
4	11570.00	39.9 AV	54.0	-14.1	1.16 V	80	26.7	13.2
5	#17355.00	68.0 PK	68.2	-0.2	1.22 V	85	50.4	17.6
6	#23140.00	-	-	-	-	-	-	-
7	#28925.00	-	-	-	-	-	-	-
8	#34710.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

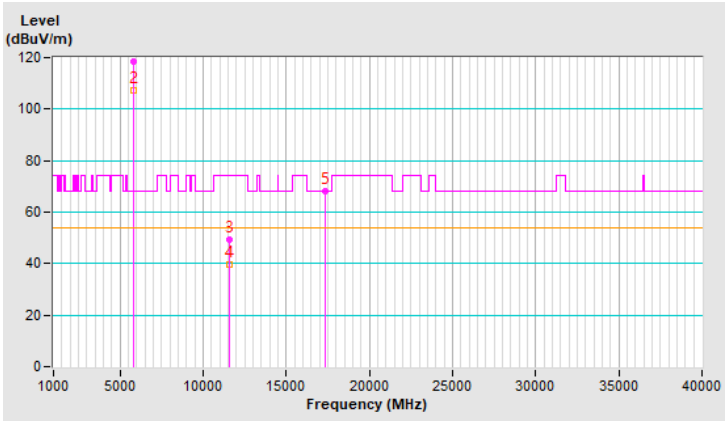


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 165：5.825 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	24℃	量 測 場 地 濕 度 ：	68%RH
測 試 日 期 ：	109 年 5 月 30 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5825.00	119.6 PK			1.59 H	319	115.3	4.3
2	*5825.00	107.9 AV			1.59 H	319	103.6	4.3
3	11650.00	49.8 PK	74.0	-24.2	1.84 H	188	36.5	13.3
4	11650.00	39.3 AV	54.0	-14.7	1.84 H	188	26.0	13.3
5	#17475.00	62.8 PK	68.2	-5.4	1.20 H	334	44.9	17.9
6	#23300.00	-	-	-	-	-	-	-
7	#29125.00	-	-	-	-	-	-	-
8	#34950.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

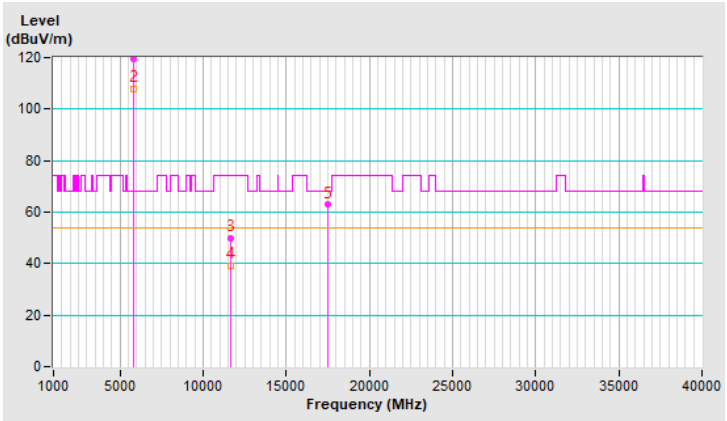


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 165：5.825 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	24℃	量 測 場 地 濕 度 ：	68%RH
測 試 日 期 ：	109 年 5 月 30 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5825.00	118.6 PK			2.71 V	331	114.3	4.3
2	*5825.00	107.3 AV			2.71 V	331	103.0	4.3
3	11650.00	49.8 PK	74.0	-24.2	1.18 V	91	36.5	13.3
4	11650.00	39.9 AV	54.0	-14.1	1.18 V	91	26.6	13.3
5	#17475.00	67.7 PK	68.2	-0.5	1.15 V	83	49.8	17.9
6	#23300.00	-	-	-	-	-	-	-
7	#29125.00	-	-	-	-	-	-	-
8	#34950.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

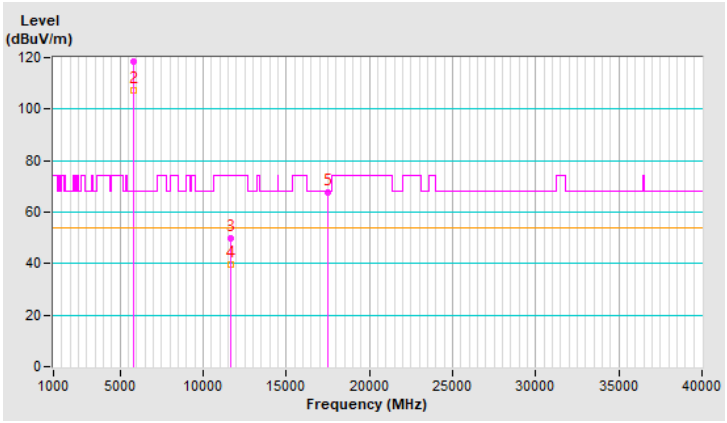


802.11ax (HE40)

操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 38：5.19 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=2kHz
量 測 場 地 溫 度 ：	24℃	量 測 場 地 濕 度 ：	68%RH
測 試 日 期 ：	109 年 5 月 30 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	65.4 PK	74.0	-8.6	1.58 H	312	61.7	3.7
2	5150.00	51.9 AV	54.0	-2.1	1.58 H	312	48.2	3.7
3	*5190.00	109.6 PK			1.58 H	312	106.0	3.6
4	*5190.00	99.9 AV			1.58 H	312	96.3	3.6
5	#10380.00	46.2 PK	68.2	-22.0	1.90 H	145	33.5	12.7
6	15570.00	51.3 PK	74.0	-22.7	1.15 H	286	37.9	13.4
7	15570.00	37.2 AV	54.0	-16.8	1.15 H	286	23.8	13.4
8	20760.00	-	-	-	-	-	-	-
9	#25950.00	-	-	-	-	-	-	-
10	#31140.00	-	-	-	-	-	-	-
11	#36330.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

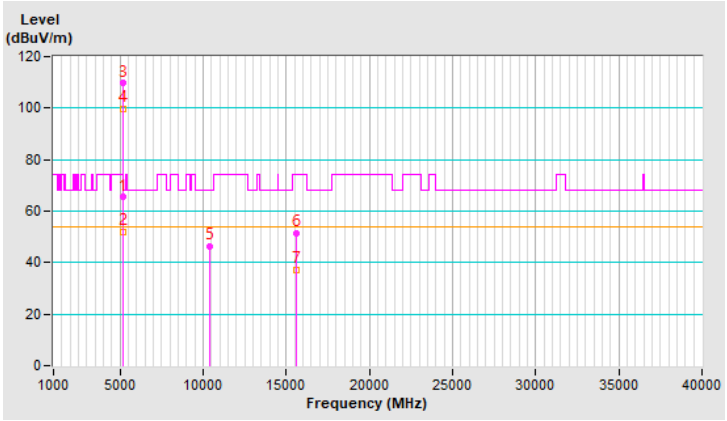


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 38：5.19 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=2kHz
量 測 場 地 溫 度 ：	24℃	量 測 場 地 濕 度 ：	68%RH
測 試 日 期 ：	109 年 5 月 30 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	66.5 PK	74.0	-7.5	3.17 V	359	62.8	3.7
2	5150.00	53.9 AV	54.0	-0.1	3.17 V	359	50.2	3.7
3	*5190.00	110.1 PK			3.17 V	359	106.5	3.6
4	*5190.00	100.6 AV			3.17 V	359	97.0	3.6
5	#10380.00	45.6 PK	68.2	-22.6	1.03 V	98	32.9	12.7
6	15570.00	56.4 PK	74.0	-17.6	1.14 V	72	43.0	13.4
7	15570.00	42.2 AV	54.0	-11.8	1.14 V	72	28.8	13.4
8	20760.00	-	-	-	-	-	-	-
9	#25950.00	-	-	-	-	-	-	-
10	#31140.00	-	-	-	-	-	-	-
11	#36330.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

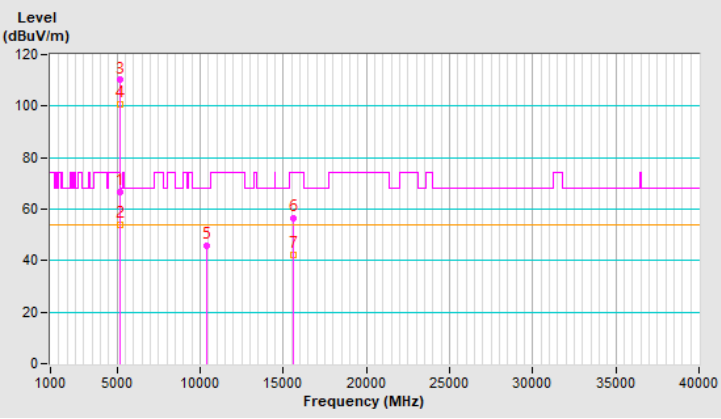


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 46：5.23 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=2kHz
量 測 場 地 溫 度 ：	24℃	量 測 場 地 濕 度 ：	68%RH
測 試 日 期 ：	109 年 5 月 30 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	65.6 PK	74.0	-8.4	1.55 H	312	61.9	3.7
2	5150.00	51.7 AV	54.0	-2.3	1.55 H	312	48.0	3.7
3	*5230.00	118.2 PK			1.55 H	312	114.7	3.5
4	*5230.00	105.8 AV			1.55 H	312	102.3	3.5
5	5350.00	55.6 PK	74.0	-18.4	1.55 H	312	52.2	3.4
6	5350.00	43.2 AV	54.0	-10.8	1.55 H	312	39.8	3.4
7	#10460.00	46.0 PK	68.2	-22.2	1.90 H	133	33.0	13.0
8	15690.00	51.1 PK	74.0	-22.9	1.13 H	276	37.2	13.9
9	15690.00	37.3 AV	54.0	-16.7	1.13 H	276	23.4	13.9
10	20920.00	-	-	-	-	-	-	-
11	#26150.00	-	-	-	-	-	-	-
12	31380.00	-	-	-	-	-	-	-
13	#36610.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

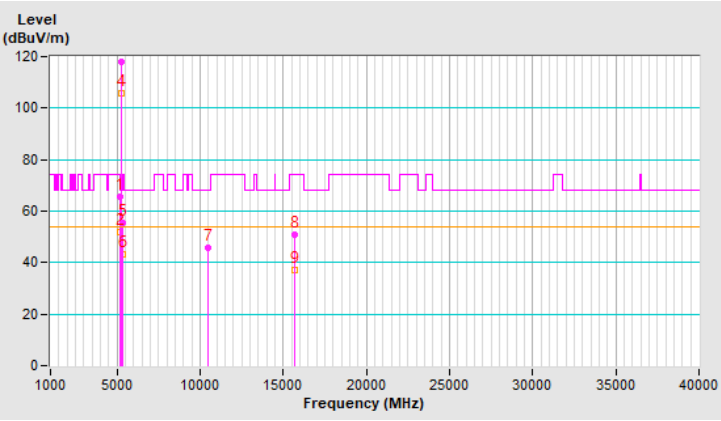


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 46：5.23 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=2kHz
量 測 場 地 溫 度 ：	24℃	量 測 場 地 濕 度 ：	68%RH
測 試 日 期 ：	109 年 5 月 30 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	65.5 PK	74.0	-8.5	1.52 V	358	61.8	3.7
2	5150.00	53.8 AV	54.0	-0.2	1.52 V	358	50.1	3.7
3	*5230.00	115.1 PK			1.52 V	358	111.6	3.5
4	*5230.00	106.0 AV			1.52 V	358	102.5	3.5
5	5350.00	52.5 PK	74.0	-21.5	1.52 V	358	49.1	3.4
6	5350.00	41.7 AV	54.0	-12.3	1.52 V	358	38.3	3.4
7	#10460.00	45.3 PK	68.2	-22.9	1.07 V	108	32.3	13.0
8	15690.00	56.2 PK	74.0	-17.8	1.13 V	59	42.3	13.9
9	15690.00	42.0 AV	54.0	-12.0	1.13 V	59	28.1	13.9
10	20920.00	-	-	-	-	-	-	-
11	#26150.00	-	-	-	-	-	-	-
12	31380.00	-	-	-	-	-	-	-
13	#36610.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

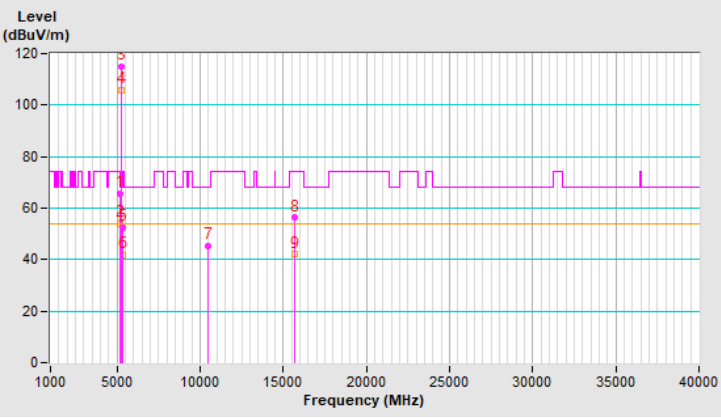


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 54：5.27 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=2kHz
量 測 場 地 溫 度 ：	24℃	量 測 場 地 濕 度 ：	68%RH
測 試 日 期 ：	109 年 5 月 17 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	56.2 PK	74.0	-17.8	1.41 H	317	52.5	3.7
2	5150.00	43.5 AV	54.0	-10.5	1.41 H	317	39.8	3.7
3	*5270.00	116.9 PK			1.41 H	317	113.5	3.4
4	*5270.00	106.4 AV			1.41 H	317	103.0	3.4
5	5350.00	67.3 PK	74.0	-6.7	1.41 H	317	63.9	3.4
6	5350.00	53.5 AV	54.0	-0.5	1.41 H	317	50.1	3.4
7	#10540.00	46.9 PK	68.2	-21.3	1.97 H	246	33.9	13.0
8	15810.00	47.2 PK	74.0	-26.8	3.04 H	165	34.0	13.2
9	15810.00	35.5 AV	54.0	-18.5	3.04 H	165	22.3	13.2
10	21080.00	-	-	-	-	-	-	-
11	#26350.00	-	-	-	-	-	-	-
12	31620.00	-	-	-	-	-	-	-
13	#36890.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

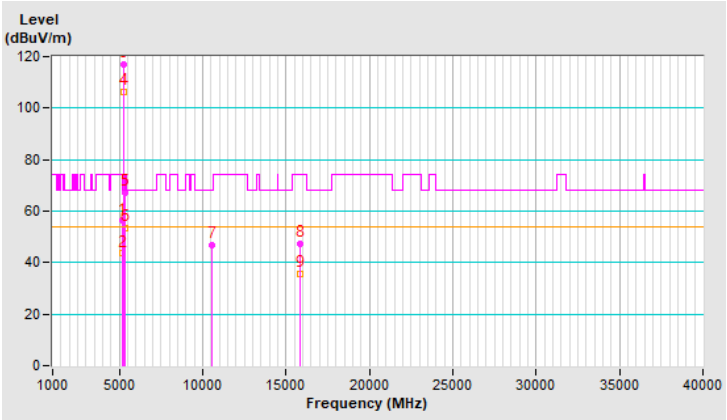


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 54：5.27 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=2kHz
量 測 場 地 溫 度 ：	24℃	量 測 場 地 濕 度 ：	68%RH
測 試 日 期 ：	109 年 5 月 17 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	56.4 PK	74.0	-17.6	3.41 V	356	52.7	3.7
2	5150.00	44.2 AV	54.0	-9.8	3.41 V	356	40.5	3.7
3	*5270.00	118.2 PK			3.41 V	356	114.8	3.4
4	*5270.00	106.7 AV			3.41 V	356	103.3	3.4
5	5350.00	66.6 PK	74.0	-7.4	3.41 V	356	63.2	3.4
6	5350.00	53.5 AV	54.0	-0.5	3.41 V	356	50.1	3.4
7	#10540.00	46.9 PK	68.2	-21.3	1.80 V	146	33.9	13.0
8	15810.00	46.6 PK	74.0	-27.4	1.61 V	249	33.4	13.2
9	15810.00	35.4 AV	54.0	-18.6	1.61 V	249	22.2	13.2
10	21080.00	-	-	-	-	-	-	-
11	#26350.00	-	-	-	-	-	-	-
12	31620.00	-	-	-	-	-	-	-
13	#36890.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

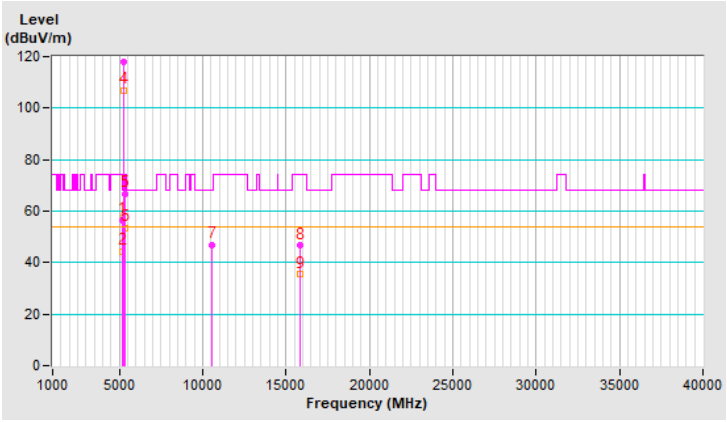


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 62：5.31 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=2kHz
量 測 場 地 溫 度 ：	24℃	量 測 場 地 濕 度 ：	68%RH
測 試 日 期 ：	109 年 5 月 17 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5310.00	111.6 PK			1.45 H	312	108.3	3.3
2	*5310.00	101.3 AV			1.45 H	312	98.0	3.3
3	5350.00	65.5 PK	74.0	-8.5	1.45 H	312	62.1	3.4
4	5350.00	53.4 AV	54.0	-0.6	1.45 H	312	50.0	3.4
5	10620.00	47.2 PK	74.0	-26.8	1.81 H	246	34.3	12.9
6	10620.00	35.3 AV	54.0	-18.7	1.81 H	246	22.4	12.9
7	15930.00	47.1 PK	74.0	-26.9	3.12 H	140	34.3	12.8
8	15930.00	35.2 AV	54.0	-18.8	3.12 H	140	22.4	12.8
9	21240.00	-	-	-	-	-	-	-
10	#26550.00	-	-	-	-	-	-	-
11	#31860.00	-	-	-	-	-	-	-
12	#37170.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

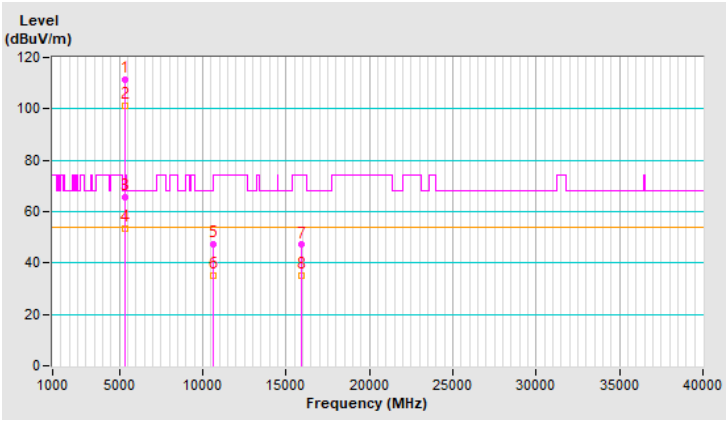


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 62：5.31 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=2kHz
量 測 場 地 溫 度 ：	24℃	量 測 場 地 濕 度 ：	68%RH
測 試 日 期 ：	109 年 5 月 17 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5310.00	110.5 PK			3.62 V	352	107.2	3.3
2	*5310.00	101.5 AV			3.62 V	352	98.2	3.3
3	5350.00	69.2 PK	74.0	-4.8	3.62 V	352	65.8	3.4
4	5350.00	53.7 AV	54.0	-0.3	3.62 V	352	50.3	3.4
5	10620.00	46.5 PK	74.0	-27.5	1.63 V	108	33.6	12.9
6	10620.00	35.4 AV	54.0	-18.6	1.63 V	108	22.5	12.9
7	15930.00	47.2 PK	74.0	-26.8	1.52 V	222	34.4	12.8
8	15930.00	35.8 AV	54.0	-18.2	1.52 V	222	23.0	12.8
9	21240.00	-	-	-	-	-	-	-
10	#26550.00	-	-	-	-	-	-	-
11	#31860.00	-	-	-	-	-	-	-
12	#37170.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

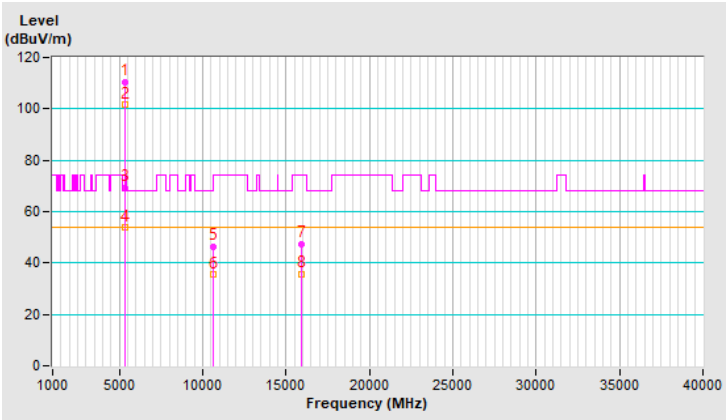


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 102：5.51 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=2kHz
量 測 場 地 溫 度 ：	24℃	量 測 場 地 濕 度 ：	68%RH
測 試 日 期 ：	109 年 5 月 17 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	55.9 PK	74.0	-18.1	1.80 H	329	52.1	3.8
2	5460.00	45.0 AV	54.0	-9.0	1.80 H	329	41.2	3.8
3	#5470.00	62.5 PK	68.2	-5.7	1.80 H	329	58.6	3.9
4	*5510.00	111.7 PK			1.80 H	329	107.8	3.9
5	*5510.00	98.9 AV			1.80 H	329	95.0	3.9
6	11020.00	46.6 PK	74.0	-27.4	1.75 H	222	33.6	13.0
7	11020.00	34.7 AV	54.0	-19.3	1.75 H	222	21.7	13.0
8	#16530.00	45.8 PK	68.2	-22.4	3.10 H	161	31.1	14.7
9	22040.00	-	-	-	-	-	-	-
10	#27550.00	-	-	-	-	-	-	-
11	#33060.00	-	-	-	-	-	-	-
12	#38570.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

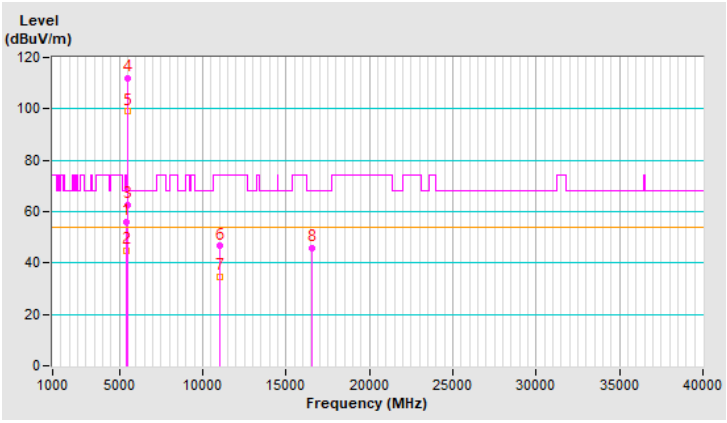


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 102：5.51 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=2kHz
量 測 場 地 溫 度 ：	24℃	量 測 場 地 濕 度 ：	68%RH
測 試 日 期 ：	109 年 5 月 17 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	61.9 PK	74.0	-12.1	3.14 V	351	58.1	3.8
2	5460.00	46.8 AV	54.0	-7.2	3.14 V	351	43.0	3.8
3	#5470.00	67.7 PK	68.2	-0.5	3.14 V	351	63.8	3.9
4	*5510.00	111.1 PK			3.14 V	351	107.2	3.9
5	*5510.00	99.5 AV			3.14 V	351	95.6	3.9
6	11020.00	47.5 PK	74.0	-26.5	1.72 V	120	34.5	13.0
7	11020.00	36.0 AV	54.0	-18.0	1.72 V	120	23.0	13.0
8	#16530.00	46.5 PK	68.2	-21.7	1.41 V	236	31.8	14.7
9	22040.00	-	-	-	-	-	-	-
10	#27550.00	-	-	-	-	-	-	-
11	#33060.00	-	-	-	-	-	-	-
12	#38570.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

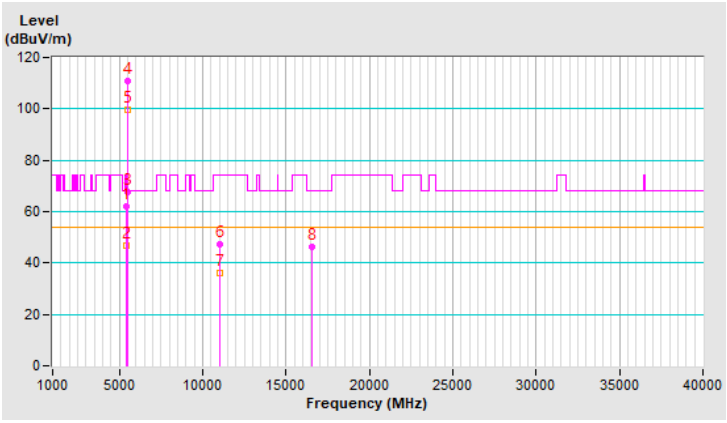


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 110：5.55 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=2kHz
量 測 場 地 溫 度 ：	24℃	量 測 場 地 濕 度 ：	68%RH
測 試 日 期 ：	109 年 5 月 17 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5550.00	116.1 PK			1.61 H	326	112.3	3.8
2	*5550.00	106.5 AV			1.61 H	326	102.7	3.8
3	11100.00	46.3 PK	74.0	-27.7	2.01 H	251	33.3	13.0
4	11100.00	34.5 AV	54.0	-19.5	2.01 H	251	21.5	13.0
5	#16650.00	46.7 PK	68.2	-21.5	3.05 H	151	31.0	15.7
6	22200.00	-	-	-	-	-	-	-
7	#27750.00	-	-	-	-	-	-	-
8	#33300.00	-	-	-	-	-	-	-
9	38850.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

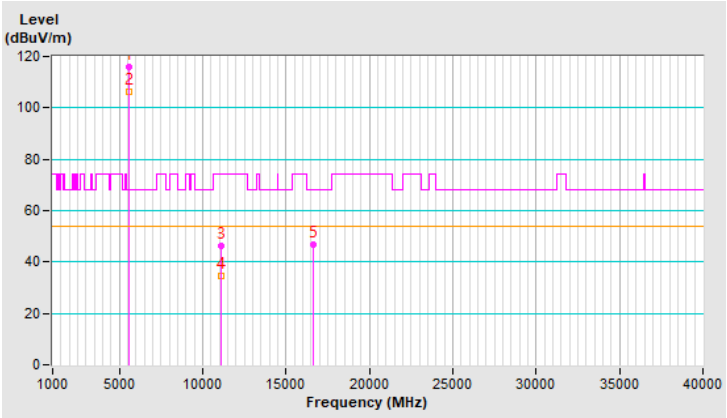


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 110：5.55 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=2kHz
量 測 場 地 溫 度 ：	24℃	量 測 場 地 濕 度 ：	68%RH
測 試 日 期 ：	109 年 5 月 17 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5550.00	117.1 PK			3.47 V	356	113.3	3.8
2	*5550.00	106.9 AV			3.47 V	356	103.1	3.8
3	11100.00	47.1 PK	74.0	-26.9	1.78 V	127	34.1	13.0
4	11100.00	35.9 AV	54.0	-18.1	1.78 V	127	22.9	13.0
5	#16650.00	46.8 PK	68.2	-21.4	1.45 V	231	31.1	15.7
6	22200.00	-	-	-	-	-	-	-
7	#27750.00	-	-	-	-	-	-	-
8	#33300.00	-	-	-	-	-	-	-
9	38850.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

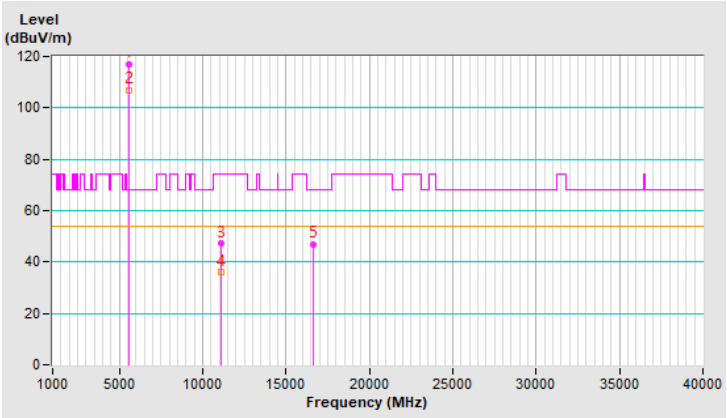


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 134：5.67 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=2kHz
量 測 場 地 溫 度 ：	24℃	量 測 場 地 濕 度 ：	68%RH
測 試 日 期 ：	109 年 5 月 17 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5670.00	114.2 PK			1.59 H	320	110.2	4.0
2	*5670.00	102.2 AV			1.59 H	320	98.2	4.0
3	#5725.00	66.8 PK	68.2	-1.4	1.59 H	320	62.8	4.0
4	11340.00	46.4 PK	74.0	-27.6	1.76 H	236	33.2	13.2
5	11340.00	34.5 AV	54.0	-19.5	1.76 H	236	21.3	13.2
6	#17010.00	47.5 PK	68.2	-20.7	3.11 H	149	30.5	17.0
7	22680.00	-	-	-	-	-	-	-
8	#28350.00	-	-	-	-	-	-	-
9	#34020.00	-	-	-	-	-	-	-
10	39690.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

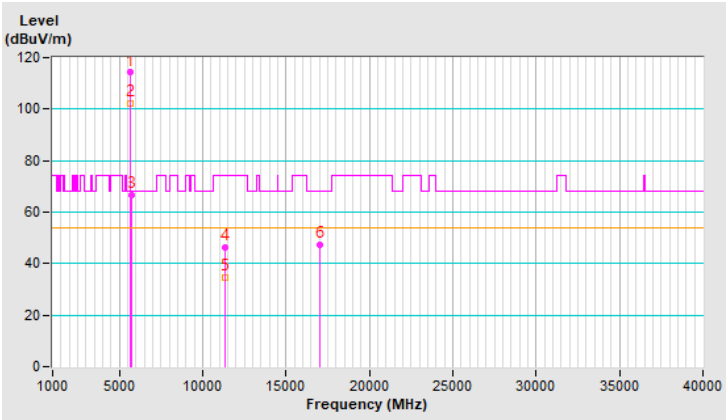


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 134：5.67 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=2kHz
量 測 場 地 溫 度 ：	24℃	量 測 場 地 濕 度 ：	68%RH
測 試 日 期 ：	109 年 5 月 17 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5670.00	112.9 PK			4.00 V	343	108.9	4.0
2	*5670.00	102.5 AV			4.00 V	343	98.5	4.0
3	#5725.00	67.7 PK	68.2	-0.5	4.00 V	343	63.7	4.0
4	11340.00	47.3 PK	74.0	-26.7	1.77 V	147	34.1	13.2
5	11340.00	36.3 AV	54.0	-17.7	1.77 V	147	23.1	13.2
6	#17010.00	47.0 PK	68.2	-21.2	1.58 V	265	30.0	17.0
7	22680.00	-	-	-	-	-	-	-
8	#28350.00	-	-	-	-	-	-	-
9	#34020.00	-	-	-	-	-	-	-
10	39690.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

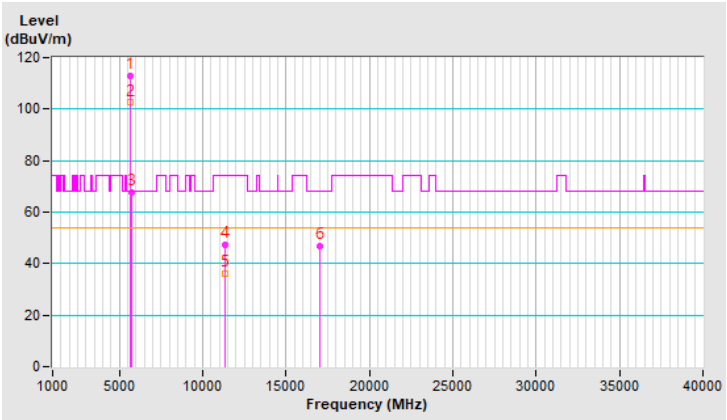


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 142 : 5.71 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=2kHz
量 測 場 地 溫 度 ：	24℃	量 測 場 地 濕 度 ：	68%RH
測 試 日 期 ：	109 年 5 月 17 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	53.5 PK	74.0	-20.5	1.59 H	314	49.7	3.8
2	5460.00	42.0 AV	54.0	-12.0	1.59 H	314	38.2	3.8
3	#5470.00	53.7 PK	68.2	-14.5	1.59 H	314	49.8	3.9
4	*5710.00	116.3 PK			1.59 H	314	112.3	4.0
5	*5710.00	106.7 AV			1.59 H	314	102.7	4.0
6	#5850.00	55.6 PK	68.2	-12.6	1.59 H	314	51.2	4.4
7	11420.00	47.2 PK	74.0	-26.8	1.82 H	234	34.0	13.2
8	11420.00	35.0 AV	54.0	-19.0	1.82 H	234	21.8	13.2
9	#17130.00	46.7 PK	68.2	-21.5	3.08 H	153	29.5	17.2
10	22840.00	-	-	-	-	-	-	-
11	#28550.00	-	-	-	-	-	-	-
12	#34260.00	-	-	-	-	-	-	-
13	39970.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

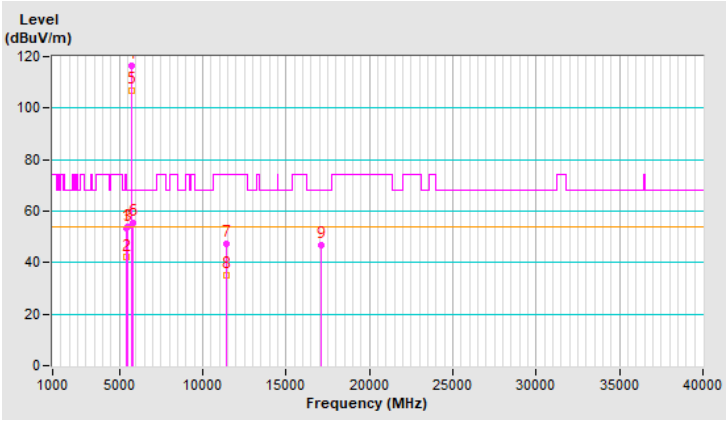


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 142：5.71 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=2kHz
量 測 場 地 溫 度 ：	24℃	量 測 場 地 濕 度 ：	68%RH
測 試 日 期 ：	109 年 5 月 17 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	54.6 PK	74.0	-19.4	3.53 V	355	50.8	3.8
2	5460.00	43.6 AV	54.0	-10.4	3.53 V	355	39.8	3.8
3	#5470.00	55.3 PK	68.2	-12.9	3.53 V	355	51.4	3.9
4	*5710.00	116.6 PK			3.53 V	355	112.6	4.0
5	*5710.00	107.0 AV			3.53 V	355	103.0	4.0
6	#5850.00	57.2 PK	68.2	-11.0	3.53 V	355	52.8	4.4
7	11420.00	47.2 PK	74.0	-26.8	1.83 V	135	34.0	13.2
8	11420.00	35.5 AV	54.0	-18.5	1.83 V	135	22.3	13.2
9	#17130.00	46.5 PK	68.2	-21.7	1.43 V	235	29.3	17.2
10	22840.00	-	-	-	-	-	-	-
11	#28550.00	-	-	-	-	-	-	-
12	#34260.00	-	-	-	-	-	-	-
13	39970.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

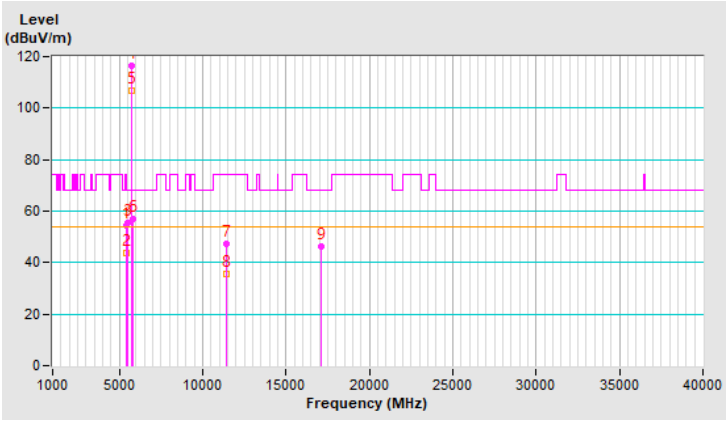


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 151：5.755 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=2kHz
量 測 場 地 溫 度 ：	24℃	量 測 場 地 濕 度 ：	68%RH
測 試 日 期 ：	109 年 5 月 30 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5755.00	115.2 PK			1.67 H	321	111.2	4.0
2	*5755.00	105.3 AV			1.67 H	321	101.3	4.0
3	11510.00	49.7 PK	74.0	-24.3	1.87 H	188	36.4	13.3
4	11510.00	37.7 AV	54.0	-16.3	1.87 H	188	24.4	13.3
5	#17265.00	60.7 PK	68.2	-7.5	1.24 H	325	43.2	17.5
6	23020.00	-	-	-	-	-	-	-
7	#28775.00	-	-	-	-	-	-	-
8	#34530.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

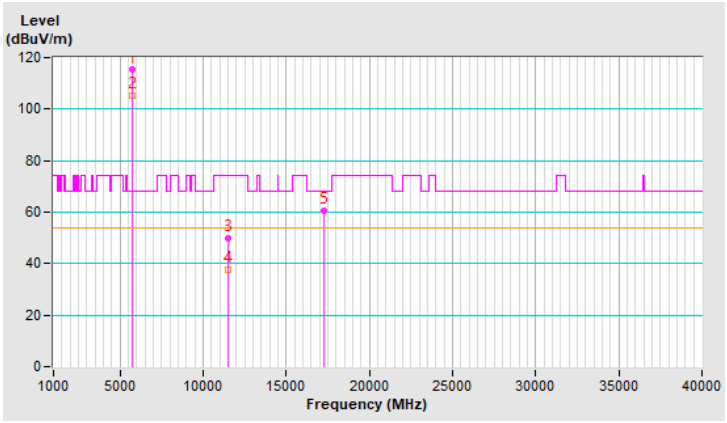


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 151：5.755 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=2kHz
量 測 場 地 溫 度 ：	24℃	量 測 場 地 濕 度 ：	68%RH
測 試 日 期 ：	109 年 5 月 30 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5755.00	115.4 PK			2.88 V	333	111.4	4.0
2	*5755.00	105.4 AV			2.88 V	333	101.4	4.0
3	11510.00	48.2 PK	74.0	-25.8	1.23 V	75	34.9	13.3
4	11510.00	37.6 AV	54.0	-16.4	1.23 V	75	24.3	13.3
5	#17265.00	65.6 PK	68.2	-2.6	1.14 V	90	48.1	17.5
6	23020.00	-	-	-	-	-	-	-
7	#28775.00	-	-	-	-	-	-	-
8	#34530.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

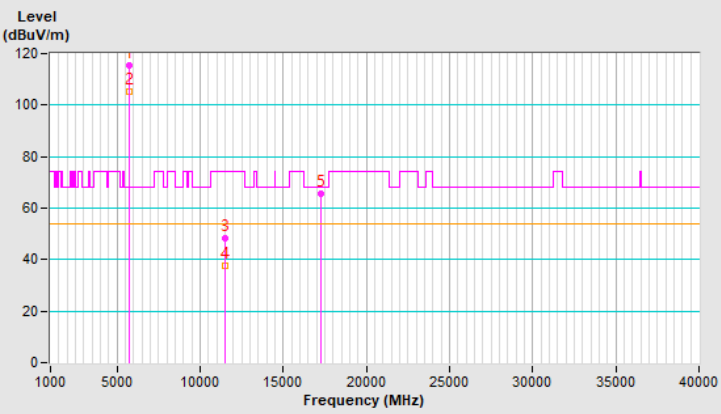


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 159：5.795 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=2kHz
量 測 場 地 溫 度 ：	24℃	量 測 場 地 濕 度 ：	68%RH
測 試 日 期 ：	109 年 5 月 30 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5795.00	117.2 PK			1.60 H	318	113.0	4.2
2	*5795.00	106.0 AV			1.60 H	318	101.8	4.2
3	11590.00	49.2 PK	74.0	-24.8	1.89 H	177	35.9	13.3
4	11590.00	37.5 AV	54.0	-16.5	1.89 H	177	24.2	13.3
5	#17385.00	60.6 PK	68.2	-7.6	1.18 H	326	42.9	17.7
6	#23180.00	-	-	-	-	-	-	-
7	#28975.00	-	-	-	-	-	-	-
8	#34770.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

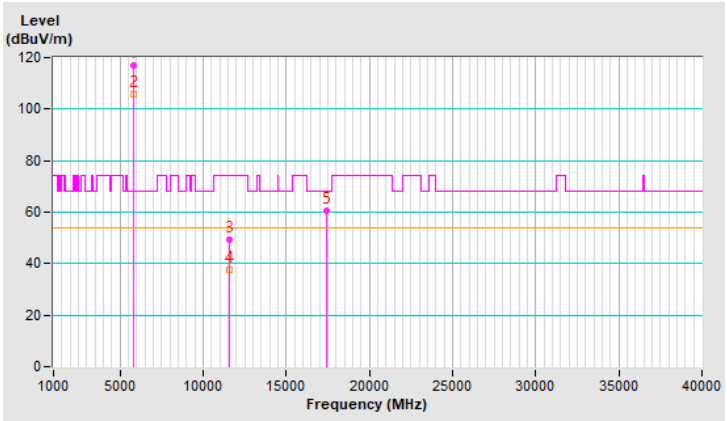


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 159：5.795 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=2kHz
量 測 場 地 溫 度 ：	24℃	量 測 場 地 濕 度 ：	68%RH
測 試 日 期 ：	109 年 5 月 30 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5795.00	114.9 PK			2.71 V	16	110.7	4.2
2	*5795.00	105.7 AV			2.71 V	16	101.5	4.2
3	11590.00	48.7 PK	74.0	-25.3	1.22 V	73	35.4	13.3
4	11590.00	38.1 AV	54.0	-15.9	1.22 V	73	24.8	13.3
5	#17385.00	65.8 PK	68.2	-2.4	1.15 V	104	48.1	17.7
6	#23180.00	-	-	-	-	-	-	-
7	#28975.00	-	-	-	-	-	-	-
8	#34770.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

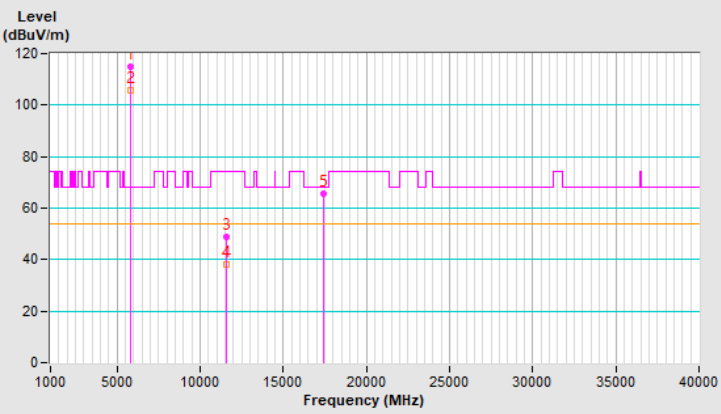


802.11ax (HE80)

操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 42：5.21 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=3kHz
量 測 場 地 溫 度 ：	24℃	量 測 場 地 濕 度 ：	68%RH
測 試 日 期 ：	109 年 5 月 30 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	66.1 PK	74.0	-7.9	1.55 H	319	62.4	3.7
2	5150.00	53.9 AV	54.0	-0.1	1.55 H	319	50.2	3.7
3	*5210.00	107.5 PK			1.55 H	319	103.9	3.6
4	*5210.00	96.5 AV			1.55 H	319	92.9	3.6
5	5350.00	53.4 PK	74.0	-20.6	1.55 H	319	50.0	3.4
6	5350.00	41.1 AV	54.0	-12.9	1.55 H	319	37.7	3.4
7	#10420.00	46.0 PK	68.2	-22.2	1.90 H	142	33.2	12.8
8	15630.00	50.7 PK	74.0	-23.3	1.11 H	270	37.0	13.7
9	15630.00	37.2 AV	54.0	-16.8	1.11 H	270	23.5	13.7
10	20840.00	-	-	-	-	-	-	-
11	#26050.00	-	-	-	-	-	-	-
12	31260.00	-	-	-	-	-	-	-
13	36470.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

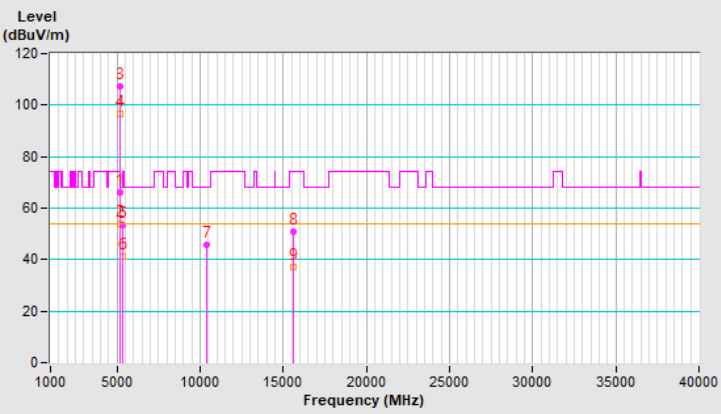


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 42：5.21 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=3kHz
量 測 場 地 溫 度 ：	24℃	量 測 場 地 濕 度 ：	68%RH
測 試 日 期 ：	109 年 5 月 30 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	67.6 PK	74.0	-6.4	3.25 V	1	63.9	3.7
2	5150.00	53.5 AV	54.0	-0.5	3.25 V	1	49.8	3.7
3	*5210.00	108.3 PK			3.25 V	1	104.7	3.6
4	*5210.00	96.8 AV			3.25 V	1	93.2	3.6
5	5350.00	54.5 PK	74.0	-19.5	3.25 V	1	51.1	3.4
6	5350.00	42.3 AV	54.0	-11.7	3.25 V	1	38.9	3.4
7	#10420.00	45.7 PK	68.2	-22.5	1.05 V	121	32.9	12.8
8	15630.00	56.4 PK	74.0	-17.6	1.13 V	53	42.7	13.7
9	15630.00	41.9 AV	54.0	-12.1	1.13 V	53	28.2	13.7
10	20840.00	-	-	-	-	-	-	-
11	#26050.00	-	-	-	-	-	-	-
12	31260.00	-	-	-	-	-	-	-
13	36470.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

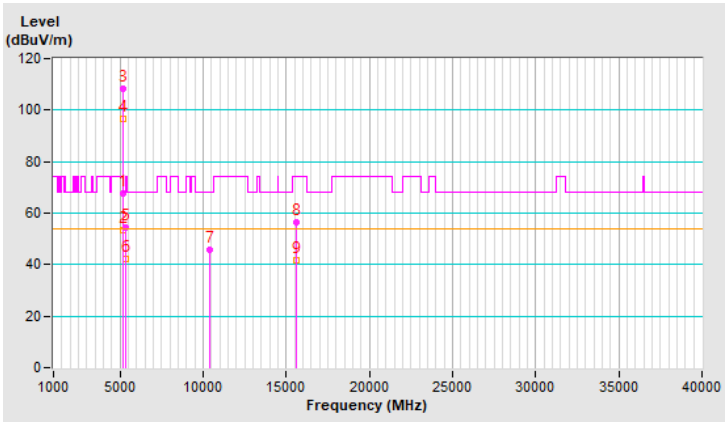


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 58：5.29 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=3kHz
量 測 場 地 溫 度 ：	24℃	量 測 場 地 濕 度 ：	68%RH
測 試 日 期 ：	109 年 5 月 17 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	53.4 PK	74.0	-20.6	1.66 H	316	49.7	3.7
2	5150.00	42.0 AV	54.0	-12.0	1.66 H	316	38.3	3.7
3	*5290.00	110.4 PK			1.66 H	316	107.1	3.3
4	*5290.00	98.5 AV			1.66 H	316	95.2	3.3
5	5350.00	64.1 PK	74.0	-9.9	1.66 H	316	60.7	3.4
6	5350.00	53.6 AV	54.0	-0.4	1.66 H	316	50.2	3.4
7	#10580.00	46.6 PK	68.2	-21.6	1.99 H	256	33.7	12.9
8	15870.00	47.4 PK	74.0	-26.6	3.07 H	155	34.5	12.9
9	15870.00	34.8 AV	54.0	-19.2	3.07 H	155	21.9	12.9
10	21160.00	-	-	-	-	-	-	-
11	#26450.00	-	-	-	-	-	-	-
12	31740.00	-	-	-	-	-	-	-
13	#37030.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

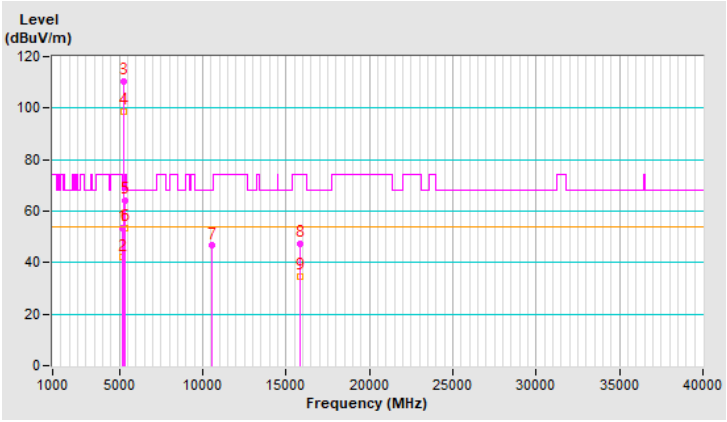


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 58：5.29 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=3kHz
量 測 場 地 溫 度 ：	24℃	量 測 場 地 濕 度 ：	68%RH
測 試 日 期 ：	109 年 5 月 17 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	53.5 PK	74.0	-20.5	3.47 V	356	49.8	3.7
2	5150.00	42.4 AV	54.0	-11.6	3.47 V	356	38.7	3.7
3	*5290.00	108.7 PK			3.47 V	356	105.4	3.3
4	*5290.00	98.8 AV			3.47 V	356	95.5	3.3
5	5350.00	67.4 PK	74.0	-6.6	3.47 V	356	64.0	3.4
6	5350.00	53.5 AV	54.0	-0.5	3.47 V	356	50.1	3.4
7	#10580.00	47.6 PK	68.2	-20.6	1.77 V	116	34.7	12.9
8	15870.00	46.8 PK	74.0	-27.2	1.44 V	234	33.9	12.9
9	15870.00	35.5 AV	54.0	-18.5	1.44 V	234	22.6	12.9
10	21160.00	-	-	-	-	-	-	-
11	#26450.00	-	-	-	-	-	-	-
12	31740.00	-	-	-	-	-	-	-
13	#37030.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

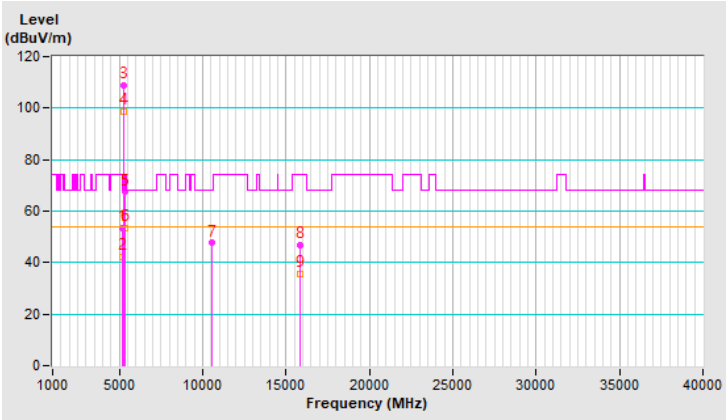


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 106：5.53 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=3kHz
量 測 場 地 溫 度 ：	24℃	量 測 場 地 濕 度 ：	68%RH
測 試 日 期 ：	109 年 5 月 17 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	65.7 PK	74.0	-8.3	1.68 H	323	61.9	3.8
2	5460.00	50.9 AV	54.0	-3.1	1.68 H	323	47.1	3.8
3	#5470.00	67.0 PK	68.2	-1.2	1.68 H	323	63.1	3.9
4	*5530.00	109.1 PK			1.68 H	323	105.3	3.8
5	*5530.00	98.4 AV			1.68 H	323	94.6	3.8
6	#5725.00	54.1 PK	68.2	-14.1	1.68 H	323	50.1	4.0
7	11060.00	47.0 PK	74.0	-27.0	1.77 H	249	34.1	12.9
8	11060.00	34.8 AV	54.0	-19.2	1.77 H	249	21.9	12.9
9	#16590.00	46.5 PK	68.2	-21.7	3.07 H	158	31.6	14.9
10	22120.00	-	-	-	-	-	-	-
11	#27650.00	-	-	-	-	-	-	-
12	#33180.00	-	-	-	-	-	-	-
13	38710.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

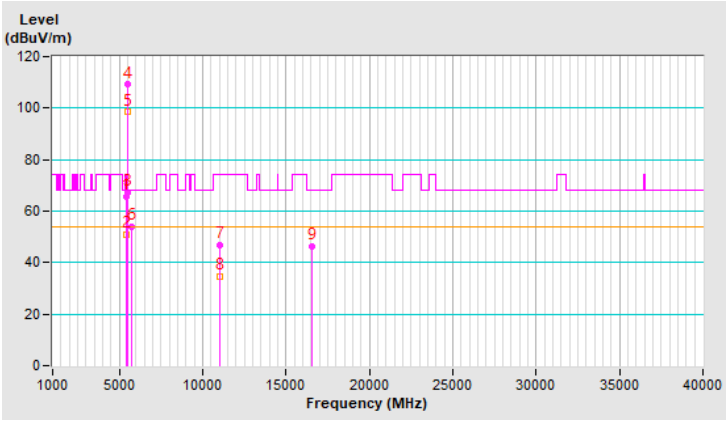


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 106：5.53 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=3kHz
量 測 場 地 溫 度 ：	24℃	量 測 場 地 濕 度 ：	68%RH
測 試 日 期 ：	109 年 5 月 17 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	64.5 PK	74.0	-9.5	2.96 V	14	60.7	3.8
2	5460.00	50.3 AV	54.0	-3.7	2.96 V	14	46.5	3.8
3	#5470.00	67.6 PK	68.2	-0.6	2.96 V	14	63.7	3.9
4	*5530.00	111.2 PK			2.96 V	14	107.4	3.8
5	*5530.00	99.2 AV			2.96 V	14	95.4	3.8
6	#5725.00	52.8 PK	68.2	-15.4	2.96 V	14	48.8	4.0
7	11060.00	46.6 PK	74.0	-27.4	1.82 V	139	33.7	12.9
8	11060.00	35.9 AV	54.0	-18.1	1.82 V	139	23.0	12.9
9	#16590.00	46.3 PK	68.2	-21.9	1.55 V	257	31.4	14.9
10	22120.00	-	-	-	-	-	-	-
11	#27650.00	-	-	-	-	-	-	-
12	#33180.00	-	-	-	-	-	-	-
13	38710.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

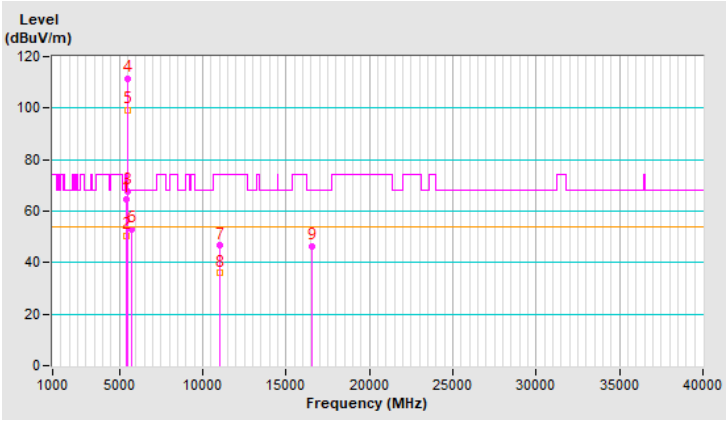


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 122：5.61 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=3kHz
量 測 場 地 溫 度 ：	24℃	量 測 場 地 濕 度 ：	68%RH
測 試 日 期 ：	109 年 5 月 17 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5610.00	111.7 PK			1.46 H	323	108.0	3.7
2	*5610.00	100.5 AV			1.46 H	323	96.8	3.7
3	#5725.00	65.6 PK	68.2	-2.6	1.46 H	323	61.6	4.0
4	11220.00	46.3 PK	74.0	-27.7	1.97 H	264	33.1	13.2
5	11220.00	34.2 AV	54.0	-19.8	1.97 H	264	21.0	13.2
6	#16830.00	46.6 PK	68.2	-21.6	3.01 H	140	30.5	16.1
7	22440.00	-	-	-	-	-	-	-
8	#28050.00	-	-	-	-	-	-	-
9	#33660.00	-	-	-	-	-	-	-
10	39270.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

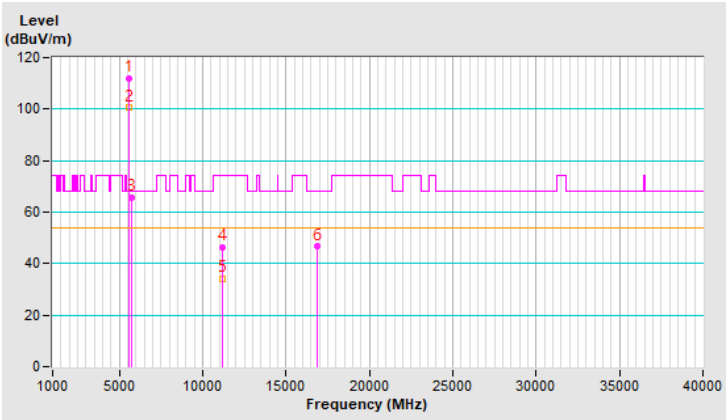


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 122：5.61 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=3kHz
量 測 場 地 溫 度 ：	24℃	量 測 場 地 濕 度 ：	68%RH
測 試 日 期 ：	109 年 5 月 17 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5610.00	112.3 PK			3.01 V	20	108.6	3.7
2	*5610.00	100.8 AV			3.01 V	20	97.1	3.7
3	#5725.00	67.8 PK	68.2	-0.4	3.01 V	20	63.8	4.0
4	11220.00	46.3 PK	74.0	-27.7	1.76 V	116	33.1	13.2
5	11220.00	35.4 AV	54.0	-18.6	1.76 V	116	22.2	13.2
6	#16830.00	47.5 PK	68.2	-20.7	1.38 V	251	31.4	16.1
7	22440.00	-	-	-	-	-	-	-
8	#28050.00	-	-	-	-	-	-	-
9	#33660.00	-	-	-	-	-	-	-
10	39270.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

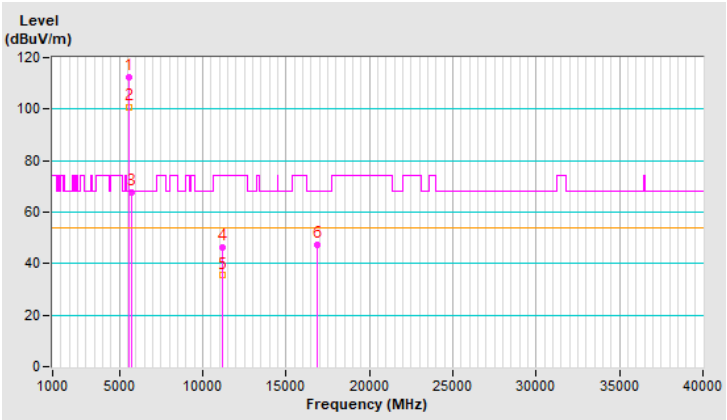


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 138：5.69 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=3kHz
量 測 場 地 溫 度 ：	24℃	量 測 場 地 濕 度 ：	68%RH
測 試 日 期 ：	109 年 5 月 17 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	55.3 PK	74.0	-18.7	1.55 H	317	51.5	3.8
2	5460.00	43.8 AV	54.0	-10.2	1.55 H	317	40.0	3.8
3	#5470.00	57.9 PK	68.2	-10.3	1.55 H	317	54.0	3.9
4	*5690.00	115.3 PK			1.55 H	317	111.3	4.0
5	*5690.00	102.8 AV			1.55 H	317	98.8	4.0
6	#5850.00	66.9 PK	68.2	-1.3	1.55 H	317	62.5	4.4
7	11380.00	46.6 PK	74.0	-27.4	1.81 H	220	33.4	13.2
8	11380.00	35.0 AV	54.0	-19.0	1.81 H	220	21.8	13.2
9	#17070.00	47.8 PK	68.2	-20.4	3.12 H	154	30.8	17.0
10	22760.00	-	-	-	-	-	-	-
11	#28450.00	-	-	-	-	-	-	-
12	#34140.00	-	-	-	-	-	-	-
13	39830.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

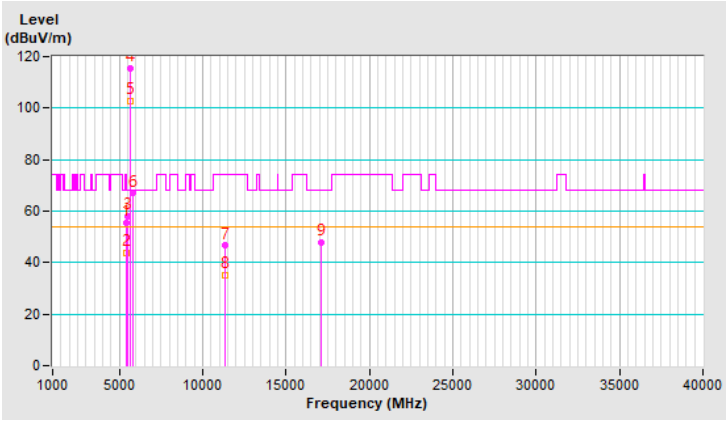


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 138：5.69 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=3kHz
量 測 場 地 溫 度 ：	24℃	量 測 場 地 濕 度 ：	68%RH
測 試 日 期 ：	109 年 5 月 17 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	57.5 PK	74.0	-16.5	2.98 V	359	53.7	3.8
2	5460.00	45.6 AV	54.0	-8.4	2.98 V	359	41.8	3.8
3	#5470.00	59.5 PK	68.2	-8.7	2.98 V	359	55.6	3.9
4	*5690.00	113.4 PK			2.98 V	359	109.4	4.0
5	*5690.00	103.0 AV			2.98 V	359	99.0	4.0
6	#5850.00	67.7 PK	68.2	-0.5	2.98 V	359	63.3	4.4
7	11380.00	46.5 PK	74.0	-27.5	1.62 V	132	33.3	13.2
8	11380.00	35.4 AV	54.0	-18.6	1.62 V	132	22.2	13.2
9	#17070.00	47.6 PK	68.2	-20.6	1.44 V	236	30.6	17.0
10	22760.00	-	-	-	-	-	-	-
11	#28450.00	-	-	-	-	-	-	-
12	#34140.00	-	-	-	-	-	-	-
13	39830.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

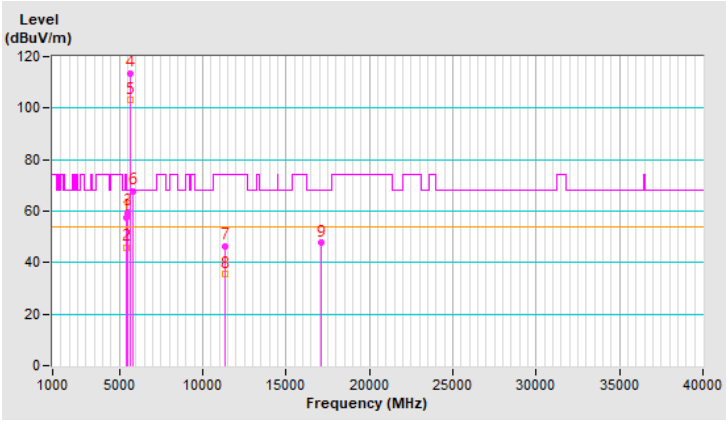


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 155：5.775 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=3kHz
量 測 場 地 溫 度 ：	24℃	量 測 場 地 濕 度 ：	68%RH
測 試 日 期 ：	109 年 5 月 30 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5775.00	112.3 PK			1.54 H	321	108.2	4.1
2	*5775.00	99.6 AV			1.54 H	321	95.5	4.1
3	11550.00	49.8 PK	74.0	-24.2	1.88 H	177	36.6	13.2
4	11550.00	37.7 AV	54.0	-16.3	1.88 H	177	24.5	13.2
5	#17325.00	60.6 PK	68.2	-7.6	1.18 H	331	43.0	17.6
6	23100.00	-	-	-	-	-	-	-
7	#28875.00	-	-	-	-	-	-	-
8	#34650.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

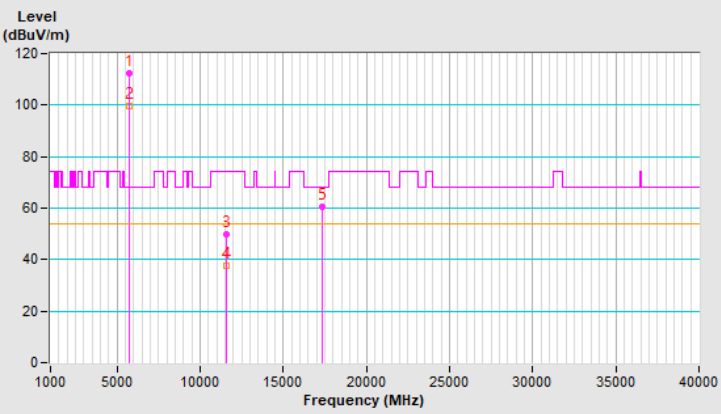


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 155：5.775 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=3kHz
量 測 場 地 溫 度 ：	24℃	量 測 場 地 濕 度 ：	68%RH
測 試 日 期 ：	109 年 5 月 30 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5775.00	113.4 PK			2.91 V	18	109.3	4.1
2	*5775.00	99.2 AV			2.91 V	18	95.1	4.1
3	11550.00	47.8 PK	74.0	-26.2	1.29 V	76	34.6	13.2
4	11550.00	37.1 AV	54.0	-16.9	1.29 V	76	23.9	13.2
5	#17325.00	65.4 PK	68.2	-2.8	1.19 V	80	47.8	17.6
6	23100.00	-	-	-	-	-	-	-
7	#28875.00	-	-	-	-	-	-	-
8	#34650.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

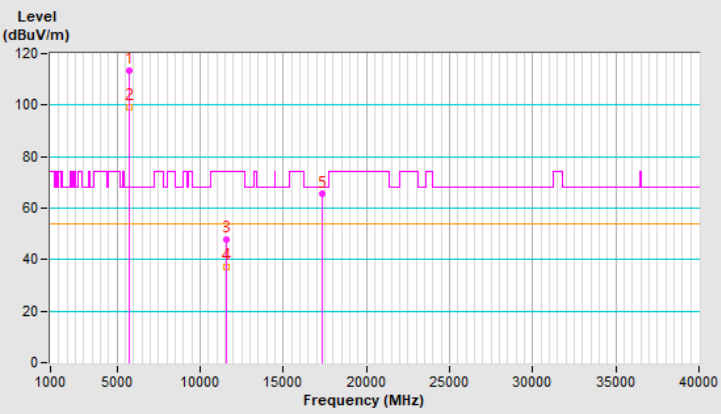


4.6.2 接收諧波

操 作 模 式 ：	接收		
基 本 波 頻 率 ：	CH 149：5.745 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=3MHz
量 測 場 地 溫 度 ：	24℃	量 測 場 地 濕 度 ：	68%RH
測 試 日 期 ：	109 年 5 月 30 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3830.00	35.8 PK	74.0	-38.2	2.16 H	177	35.0	0.8
2	3830.00	30.1 AV	54.0	-23.9	2.16 H	177	29.3	0.8
3	7660.00	44.9 PK	74.0	-29.1	3.49 H	93	36.2	8.7
4	7660.00	34.0 AV	54.0	-20.0	3.49 H	93	25.3	8.7
5	11490.00	48.6 PK	74.0	-25.4	1.93 H	211	35.3	13.3
6	11490.00	38.1 AV	54.0	-15.9	1.93 H	211	24.8	13.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

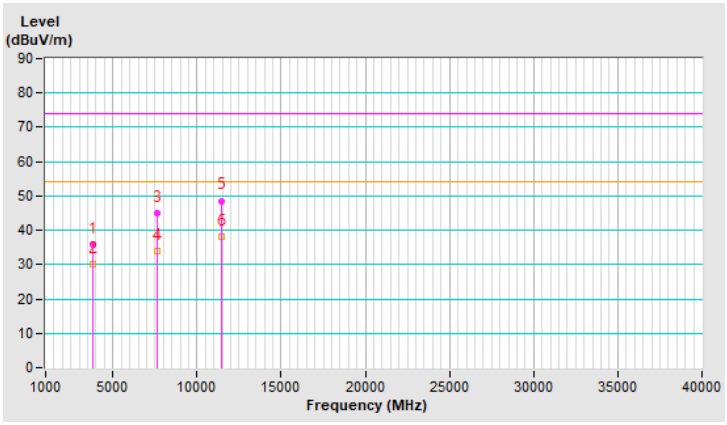


操 作 模 式 ：	接收		
基 本 波 頻 率 ：	CH 149：5.745 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=3MHz
量 測 場 地 溫 度 ：	24℃	量 測 場 地 濕 度 ：	68%RH
測 試 日 期 ：	109 年 5 月 30 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3830.00	37.1 PK	74.0	-36.9	1.56 V	132	36.3	0.8
2	3830.00	30.9 AV	54.0	-23.1	1.56 V	132	30.1	0.8
3	7660.00	45.4 PK	74.0	-28.6	1.94 V	226	36.7	8.7
4	7660.00	34.3 AV	54.0	-19.7	1.94 V	226	25.6	8.7
5	11490.00	49.2 PK	74.0	-24.8	1.47 V	187	35.9	13.3
6	11490.00	38.7 AV	54.0	-15.3	1.47 V	187	25.4	13.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

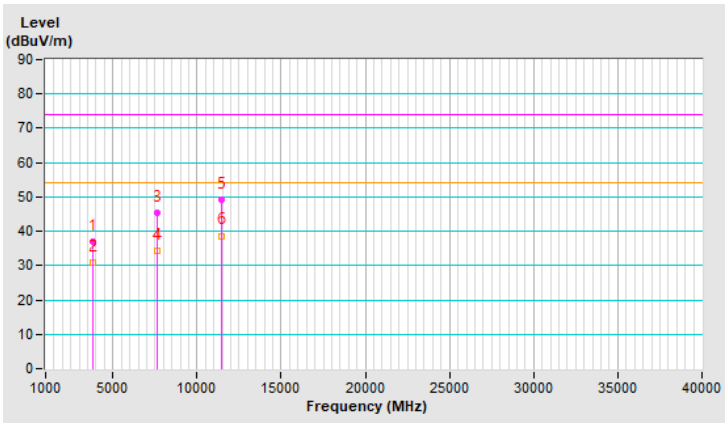

4.6.3 其它不必要之訊號


802.11ax (HE20)

操 作 模 式 ：	發射接收	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 149：5.745 GHz	測 試 儀 器 ：	(QP) RB=120kHz
量測場地溫度：	22℃	量測場地濕度：	68%RH
測 試 日 期 ：	109 年 6 月 9 日	測 試 者 ：	杜維倫

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	36.96	35.4 QP	40.0	-4.6	2.00 H	229	43.8	-8.4
2	78.44	33.8 QP	40.0	-6.2	2.00 H	128	46.1	-12.3
3	125.00	29.2 QP	43.5	-14.3	2.00 H	86	38.1	-8.9
4	198.50	30.4 QP	43.5	-13.1	2.00 H	176	40.8	-10.4
5	250.01	26.8 QP	46.0	-19.2	1.50 H	206	35.2	-8.4
6	323.56	36.2 QP	46.0	-9.8	1.00 H	246	41.7	-5.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30MHz~1000MHz.
5. The emission levels were very low against the limit of frequency range 9kHz~30MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

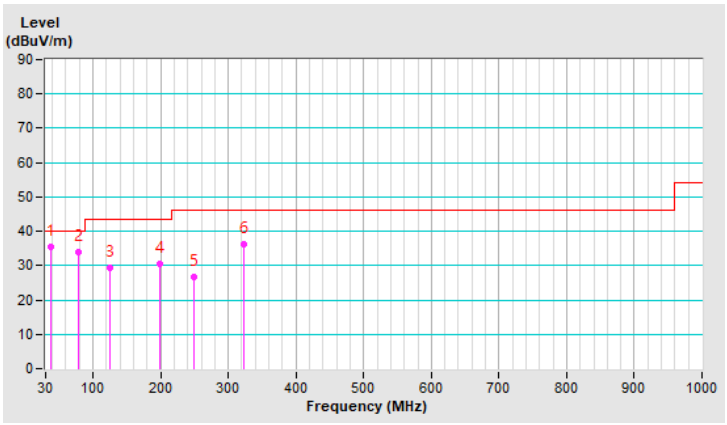


操 作 模 式 ：	發射接收	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 149：5.745 GHz	測 試 儀 器 ：	(QP) RB=120kHz
量 測 場 地 溫 度 ：	22℃	量 測 場 地 濕 度 ：	68%RH
測 試 日 期 ：	109 年 6 月 9 日	測 試 者 ：	杜維倫

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	38.71	35.2 QP	40.0	-4.8	1.57 V	241	43.5	-8.3
2	67.49	35.8 QP	40.0	-4.2	1.00 V	134	45.4	-9.6
3	148.11	29.3 QP	43.5	-14.2	1.00 V	274	36.4	-7.1
4	226.05	25.8 QP	46.0	-20.2	1.00 V	163	35.6	-9.8
5	289.39	25.6 QP	46.0	-20.4	1.50 V	186	32.3	-6.7
6	321.35	33.5 QP	46.0	-12.5	2.00 V	168	39.0	-5.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30MHz~1000MHz.
5. The emission levels were very low against the limit of frequency range 9kHz~30MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

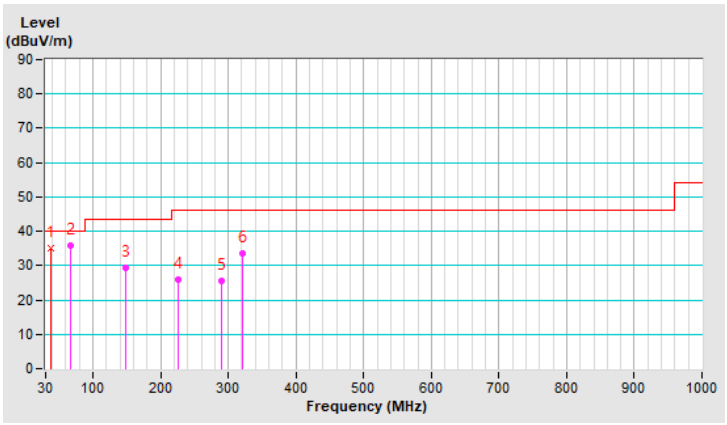

4.7 量測結果 (模式 2)

4.7.1 發射諧波


802.11a

操作模式 ：	發射	調變技術 ：	OFDM
基本波頻率 ：	CH 36：5.18 GHz	測試儀器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=10Hz
量測場地溫度 ：	23℃	量測場地濕度 ：	67%RH
測試日期 ：	109 年 1 月 22 日	測試者 ：	柯其宗

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	71.8 PK	74.0	-2.2	1.59 H	320	68.8	3.0
2	5150.00	53.6 AV	54.0	-0.4	1.59 H	320	50.6	3.0
3	*5180.00	117.5 PK			1.59 H	320	114.6	2.9
4	*5180.00	108.0 AV			1.59 H	320	105.1	2.9
5	#10360.00	46.0 PK	68.2	-22.2	2.75 H	248	34.0	12.0
6	15540.00	50.6 PK	74.0	-23.4	2.50 H	58	37.6	13.0
7	15540.00	38.4 AV	54.0	-15.6	2.50 H	58	25.4	13.0
8	20720.00	-	-	-	-	-	-	-
9	#25900.00	-	-	-	-	-	-	-
10	#31080.00	-	-	-	-	-	-	-
11	#36260.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

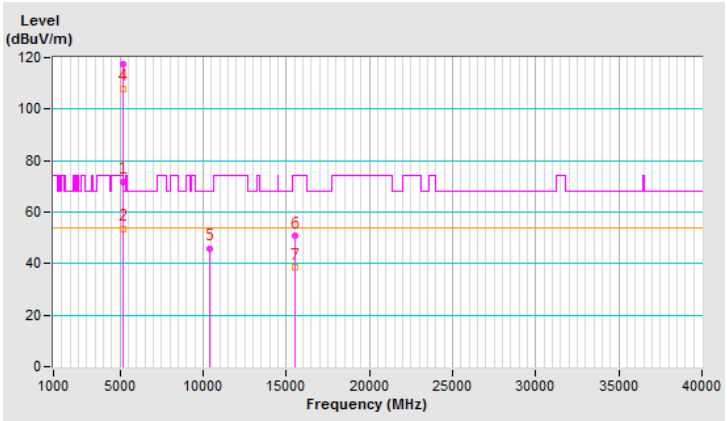


操 作 模 式 ：	發射	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 36：5.18 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=10Hz
量 測 場 地 溫 度 ：	23℃	量 測 場 地 濕 度 ：	67%RH
測 試 日 期 ：	109 年 1 月 22 日	測 試 者 ：	柯其宗

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	66.9 PK	74.0	-7.1	2.30 V	360	63.9	3.0
2	5150.00	48.7 AV	54.0	-5.3	2.30 V	360	45.7	3.0
3	*5180.00	114.5 PK			2.30 V	360	111.6	2.9
4	*5180.00	104.7 AV			2.30 V	360	101.8	2.9
5	#10360.00	45.5 PK	68.2	-22.7	1.86 V	132	33.5	12.0
6	15540.00	55.2 PK	74.0	-18.8	1.33 V	69	42.2	13.0
7	15540.00	42.8 AV	54.0	-11.2	1.33 V	69	29.8	13.0
8	20720.00	-	-	-	-	-	-	-
9	#25900.00	-	-	-	-	-	-	-
10	#31080.00	-	-	-	-	-	-	-
11	#36260.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

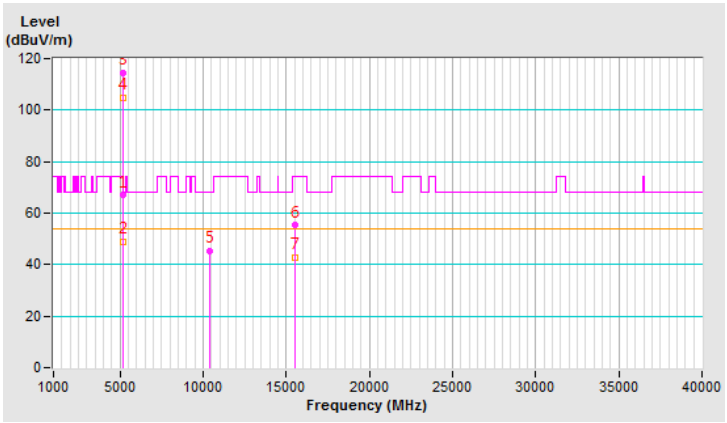


操 作 模 式 ：	發射	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 40：5.2 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=10Hz
量 測 場 地 溫 度 ：	23℃	量 測 場 地 濕 度 ：	67%RH
測 試 日 期 ：	109 年 1 月 22 日	測 試 者 ：	柯其宗

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	68.6 PK	74.0	-5.4	1.57 H	320	65.6	3.0
2	5150.00	50.5 AV	54.0	-3.5	1.57 H	320	47.5	3.0
3	*5200.00	120.7 PK			1.57 H	320	117.9	2.8
4	*5200.00	111.4 AV			1.57 H	320	108.6	2.8
5	#10400.00	46.4 PK	68.2	-21.8	2.75 H	237	34.3	12.1
6	15600.00	50.6 PK	74.0	-23.4	2.49 H	48	37.7	12.9
7	15600.00	38.2 AV	54.0	-15.8	2.49 H	48	25.3	12.9
8	20800.00	-	-	-	-	-	-	-
9	#26000.00	-	-	-	-	-	-	-
10	31200.00	-	-	-	-	-	-	-
11	#36400.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

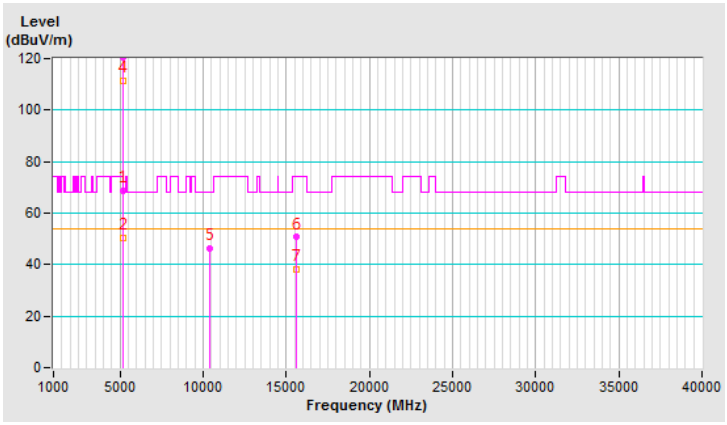


操 作 模 式 ：	發射	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 40：5.2 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=10Hz
量 測 場 地 溫 度 ：	23℃	量 測 場 地 濕 度 ：	67%RH
測 試 日 期 ：	109 年 1 月 22 日	測 試 者 ：	柯其宗

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	63.9 PK	74.0	-10.1	2.36 V	360	60.9	3.0
2	5150.00	45.5 AV	54.0	-8.5	2.36 V	360	42.5	3.0
3	*5200.00	116.9 PK			2.36 V	360	114.1	2.8
4	*5200.00	107.6 AV			2.36 V	360	104.8	2.8
5	#10400.00	46.9 PK	68.2	-21.3	1.88 V	146	34.8	12.1
6	15600.00	57.2 PK	74.0	-16.8	1.33 V	80	44.3	12.9
7	15600.00	44.6 AV	54.0	-9.4	1.33 V	80	31.7	12.9
8	20800.00	-	-	-	-	-	-	-
9	#26000.00	-	-	-	-	-	-	-
10	31200.00	-	-	-	-	-	-	-
11	#36400.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

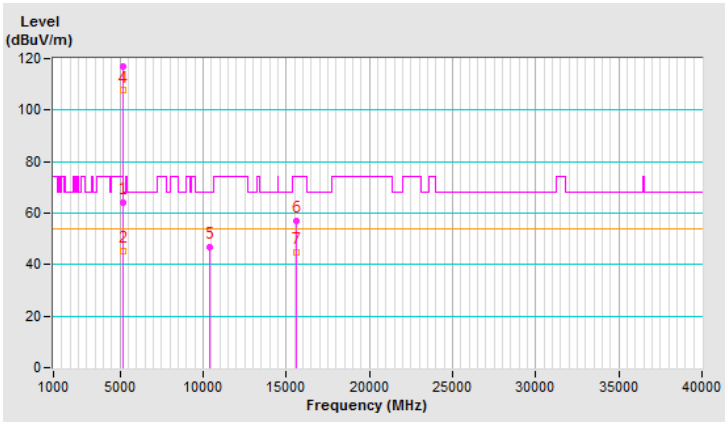


操 作 模 式 ：	發射	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 48：5.24 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=10Hz
量 測 場 地 溫 度 ：	23℃	量 測 場 地 濕 度 ：	67%RH
測 試 日 期 ：	109 年 1 月 22 日	測 試 者 ：	柯其宗

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	55.2 PK	74.0	-18.8	1.62 H	321	52.2	3.0
2	5150.00	43.1 AV	54.0	-10.9	1.62 H	321	40.1	3.0
3	*5240.00	120.6 PK			1.62 H	321	118.0	2.6
4	*5240.00	110.9 AV			1.62 H	321	108.3	2.6
5	5350.00	55.0 PK	74.0	-19.0	1.62 H	321	52.4	2.6
6	5350.00	42.8 AV	54.0	-11.2	1.62 H	321	40.2	2.6
7	#10480.00	46.8 PK	68.2	-21.4	2.71 H	227	34.3	12.5
8	15720.00	50.8 PK	74.0	-23.2	2.51 H	53	38.6	12.2
9	15720.00	38.2 AV	54.0	-15.8	2.51 H	53	26.0	12.2
10	20960.00	-	-	-	-	-	-	-
11	#26200.00	-	-	-	-	-	-	-
12	31440.00	-	-	-	-	-	-	-
13	#36680.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

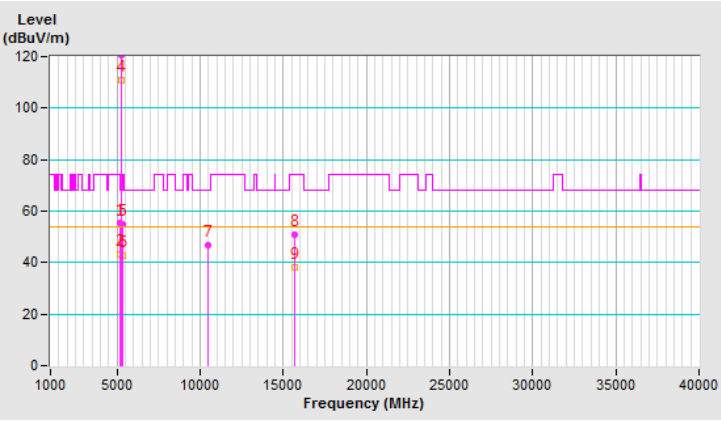


操 作 模 式 ：	發射	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 48：5.24 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=10Hz
量 測 場 地 溫 度 ：	23℃	量 測 場 地 濕 度 ：	67%RH
測 試 日 期 ：	109 年 1 月 22 日	測 試 者 ：	柯其宗

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	55.0 PK	74.0	-19.0	2.37 V	342	52.0	3.0
2	5150.00	42.9 AV	54.0	-11.1	2.37 V	342	39.9	3.0
3	*5240.00	116.5 PK			2.37 V	342	113.9	2.6
4	*5240.00	107.5 AV			2.37 V	342	104.9	2.6
5	5350.00	54.8 PK	74.0	-19.2	2.37 V	342	52.2	2.6
6	5350.00	42.5 AV	54.0	-11.5	2.37 V	342	39.9	2.6
7	#10480.00	46.5 PK	68.2	-21.7	1.84 V	161	34.0	12.5
8	15720.00	57.1 PK	74.0	-16.9	1.28 V	78	44.9	12.2
9	15720.00	44.5 AV	54.0	-9.5	1.28 V	78	32.3	12.2
10	20960.00	-	-	-	-	-	-	-
11	#26200.00	-	-	-	-	-	-	-
12	31440.00	-	-	-	-	-	-	-
13	#36680.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

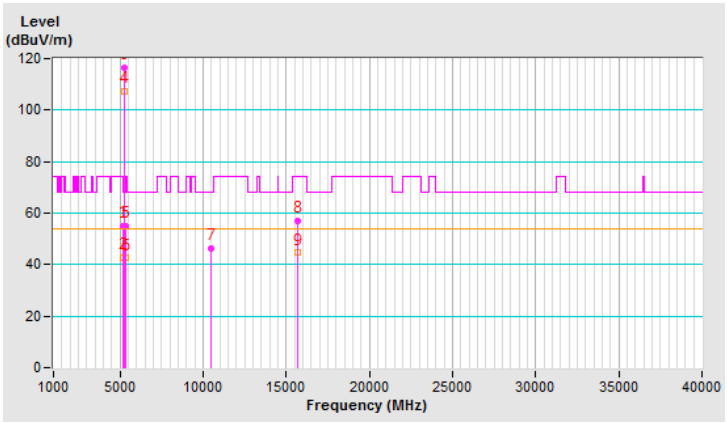


操 作 模 式 ：	發射	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 52：5.26 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=10Hz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	71%RH
測 試 日 期 ：	109 年 2 月 28 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	53.6 PK	74.0	-20.4	1.67 H	324	50.6	3.0
2	5150.00	42.5 AV	54.0	-11.5	1.67 H	324	39.5	3.0
3	*5260.00	118.4 PK			1.67 H	324	115.9	2.5
4	*5260.00	108.6 AV			1.67 H	324	106.1	2.5
5	5350.00	54.4 PK	74.0	-19.6	1.67 H	56	51.8	2.6
6	5350.00	42.4 AV	54.0	-11.6	1.67 H	56	39.8	2.6
7	#10520.00	49.7 PK	68.2	-18.5	3.52 H	193	37.1	12.6
8	15780.00	47.5 PK	74.0	-26.5	1.63 H	181	35.7	11.8
9	15780.00	38.3 AV	54.0	-15.7	1.63 H	181	26.5	11.8
10	21040.00	-	-	-	-	-	-	-
11	#26300.00	-	-	-	-	-	-	-
12	31560.00	-	-	-	-	-	-	-
13	#36820.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

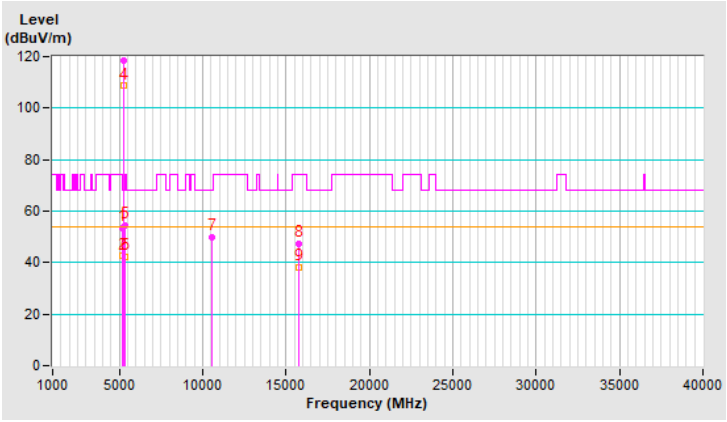


操 作 模 式 ：	發射	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 52：5.26 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=10Hz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	71%RH
測 試 日 期 ：	109 年 2 月 28 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	53.3 PK	74.0	-20.7	2.88 V	132	50.3	3.0
2	5150.00	41.6 AV	54.0	-12.4	2.88 V	132	38.6	3.0
3	*5260.00	114.1 PK			2.88 V	132	111.6	2.5
4	*5260.00	104.6 AV			2.88 V	132	102.1	2.5
5	5350.00	54.1 PK	74.0	-19.9	2.88 V	132	51.5	2.6
6	5350.00	42.3 AV	54.0	-11.7	2.88 V	132	39.7	2.6
7	#10520.00	50.3 PK	68.2	-17.9	3.24 V	184	37.7	12.6
8	15780.00	48.6 PK	74.0	-25.4	3.46 V	159	36.8	11.8
9	15780.00	40.2 AV	54.0	-13.8	3.46 V	159	28.4	11.8
10	21040.00	-	-	-	-	-	-	-
11	#26300.00	-	-	-	-	-	-	-
12	31560.00	-	-	-	-	-	-	-
13	#36820.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

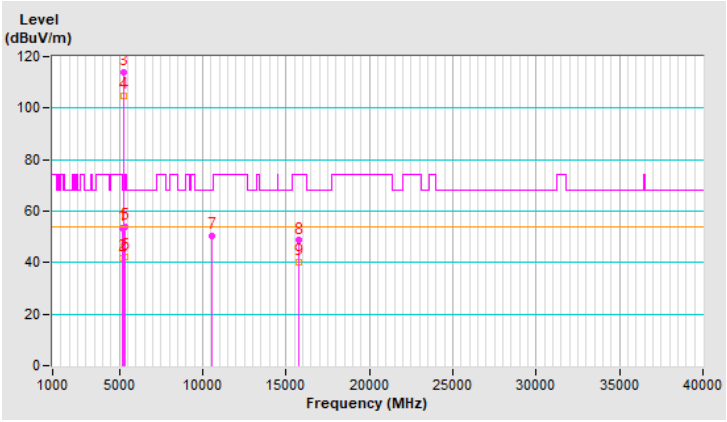


操 作 模 式 ：	發射	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 60：5.3 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=10Hz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	71%RH
測 試 日 期 ：	109 年 2 月 28 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5300.00	118.6 PK			1.57 H	323	116.2	2.4
2	*5300.00	108.7 AV			1.57 H	323	106.3	2.4
3	5350.00	68.5 PK	74.0	-5.5	1.57 H	323	65.9	2.6
4	5350.00	46.7 AV	54.0	-7.3	1.57 H	323	44.1	2.6
5	10600.00	49.5 PK	74.0	-24.5	3.54 H	183	37.1	12.4
6	10600.00	36.4 AV	54.0	-17.6	3.54 H	183	24.0	12.4
7	15900.00	46.8 PK	74.0	-27.2	1.58 H	196	34.7	12.1
8	15900.00	37.9 AV	54.0	-16.1	1.58 H	196	25.8	12.1
9	21200.00	-	-	-	-	-	-	-
10	#26500.00	-	-	-	-	-	-	-
11	31800.00	-	-	-	-	-	-	-
12	#37100.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

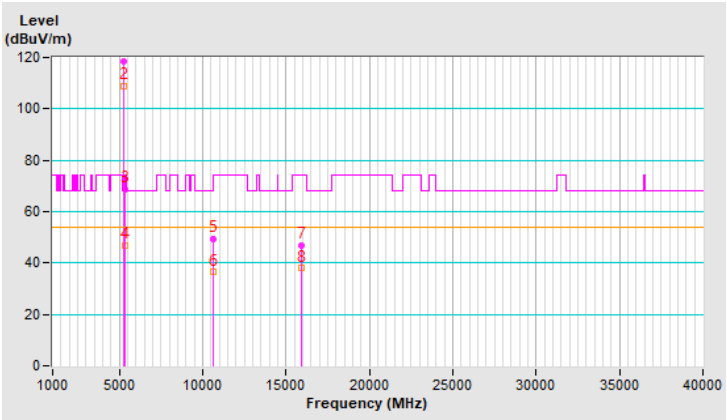


操 作 模 式 ：	發射	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 60：5.3 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=10Hz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	71%RH
測 試 日 期 ：	109 年 2 月 28 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5300.00	105.3 PK			2.94 V	131	102.9	2.4
2	*5300.00	104.2 AV			2.94 V	131	101.8	2.4
3	5350.00	65.4 PK	74.0	-8.6	2.94 V	131	62.8	2.6
4	5350.00	43.5 AV	54.0	-10.5	2.94 V	131	40.9	2.6
5	10600.00	50.0 PK	74.0	-24.0	3.20 V	175	37.6	12.4
6	10600.00	36.2 AV	54.0	-17.8	3.20 V	175	23.8	12.4
7	15900.00	48.5 PK	74.0	-25.5	3.45 V	160	36.4	12.1
8	15900.00	39.8 AV	54.0	-14.2	3.45 V	160	27.7	12.1
9	21200.00	-	-	-	-	-	-	-
10	#26500.00	-	-	-	-	-	-	-
11	31800.00	-	-	-	-	-	-	-
12	#37100.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

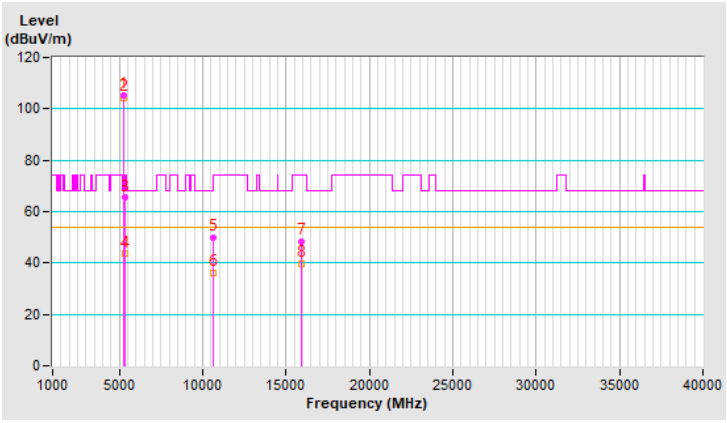


操 作 模 式 ：	發射	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 64：5.32 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=10Hz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	71%RH
測 試 日 期 ：	109 年 2 月 28 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5320.00	119.4 PK			1.70 H	55	116.9	2.5
2	*5320.00	109.1 AV			1.70 H	55	106.6	2.5
3	5350.00	73.0 PK	74.0	-1.0	1.70 H	55	70.4	2.6
4	5350.00	53.8 AV	54.0	-0.2	1.70 H	55	51.2	2.6
5	10640.00	49.7 PK	74.0	-24.3	3.56 H	206	37.3	12.4
6	10640.00	36.5 AV	54.0	-17.5	3.56 H	206	24.1	12.4
7	15960.00	47.2 PK	74.0	-26.8	1.60 H	191	34.8	12.4
8	15960.00	38.0 AV	54.0	-16.0	1.60 H	191	25.6	12.4
9	21280.00	-	-	-	-	-	-	-
10	#26600.00	-	-	-	-	-	-	-
11	#31920.00	-	-	-	-	-	-	-
12	#37240.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

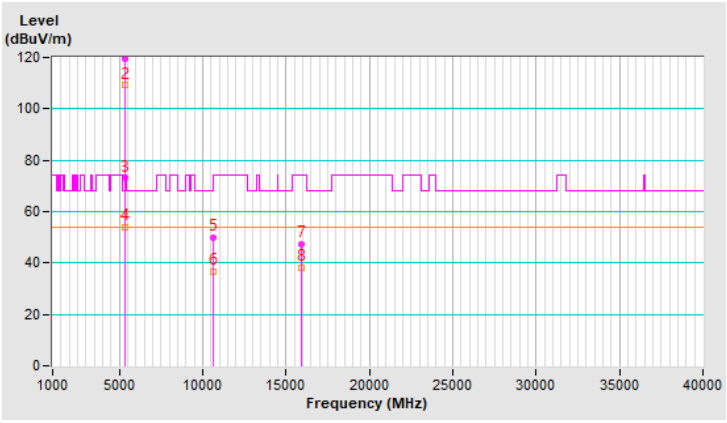


操 作 模 式 ：	發射	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 64：5.32 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=10Hz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	71%RH
測 試 日 期 ：	109 年 2 月 28 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5320.00	104.5 PK			2.84 V	142	102.0	2.5
2	*5320.00	104.4 AV			2.84 V	142	101.9	2.5
3	5350.00	67.3 PK	74.0	-6.7	2.84 V	142	64.7	2.6
4	5350.00	50.4 AV	54.0	-3.6	2.84 V	142	47.8	2.6
5	10640.00	50.5 PK	74.0	-23.5	3.27 V	188	38.1	12.4
6	10640.00	36.4 AV	54.0	-17.6	3.27 V	188	24.0	12.4
7	15960.00	49.0 PK	74.0	-25.0	3.46 V	161	36.6	12.4
8	15960.00	40.6 AV	54.0	-13.4	3.46 V	161	28.2	12.4
9	21280.00	-	-	-	-	-	-	-
10	#26600.00	-	-	-	-	-	-	-
11	#31920.00	-	-	-	-	-	-	-
12	#37240.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

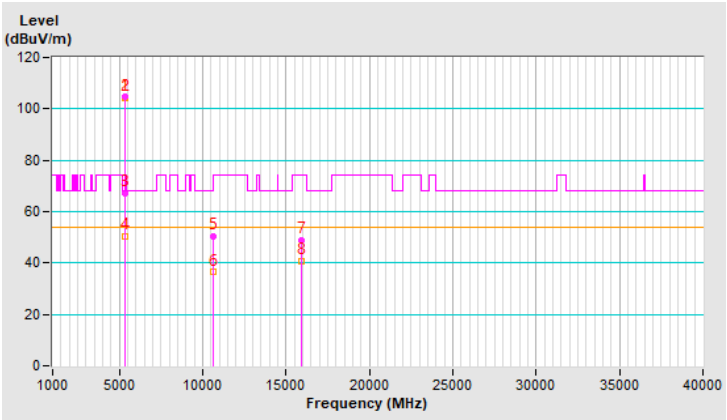


操 作 模 式 ：	發射	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 100：5.5 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=10Hz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	71%RH
測 試 日 期 ：	109 年 2 月 28 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	60.0 PK	74.0	-14.0	1.48 H	51	57.0	3.0
2	5460.00	44.2 AV	54.0	-9.8	1.48 H	51	41.2	3.0
3	#5470.00	67.9 PK	68.2	-0.3	1.48 H	51	64.8	3.1
4	*5500.00	116.6 PK			1.48 H	51	113.5	3.1
5	*5500.00	107.3 AV			1.48 H	51	104.2	3.1
6	11000.00	43.2 PK	74.0	-30.8	3.59 H	192	30.6	12.6
7	11000.00	30.2 AV	54.0	-23.8	3.59 H	192	17.6	12.6
8	#16500.00	45.8 PK	68.2	-22.4	1.60 H	195	32.2	13.6
9	#22000.00	-	-	-	-	-	-	-
10	#27500.00	-	-	-	-	-	-	-
11	#33000.00	-	-	-	-	-	-	-
12	#38500.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

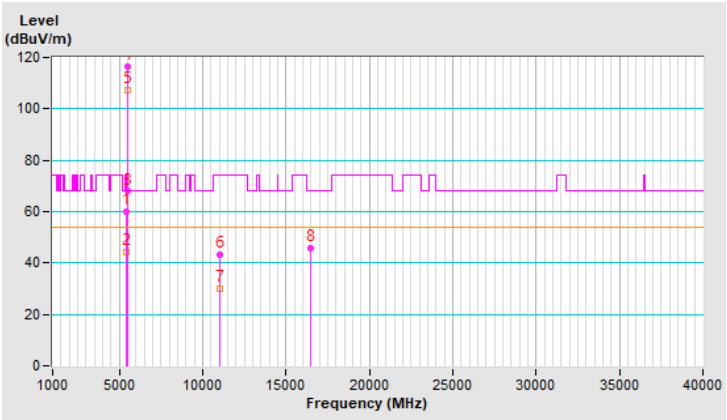


操 作 模 式 ：	發射	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 100：5.5 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=10Hz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	71%RH
測 試 日 期 ：	109 年 2 月 28 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	57.8 PK	74.0	-16.2	2.93 V	147	54.8	3.0
2	5460.00	42.4 AV	54.0	-11.6	2.93 V	147	39.4	3.0
3	#5470.00	65.5 PK	68.2	-2.7	2.93 V	147	62.4	3.1
4	*5500.00	113.5 PK			2.93 V	147	110.4	3.1
5	*5500.00	104.1 AV			2.93 V	147	101.0	3.1
6	11000.00	43.5 PK	74.0	-30.5	3.16 V	181	30.9	12.6
7	11000.00	30.3 AV	54.0	-23.7	3.16 V	181	17.7	12.6
8	#16500.00	45.3 PK	68.2	-22.9	3.53 V	165	31.7	13.6
9	#22000.00	-	-	-	-	-	-	-
10	#27500.00	-	-	-	-	-	-	-
11	#33000.00	-	-	-	-	-	-	-
12	#38500.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

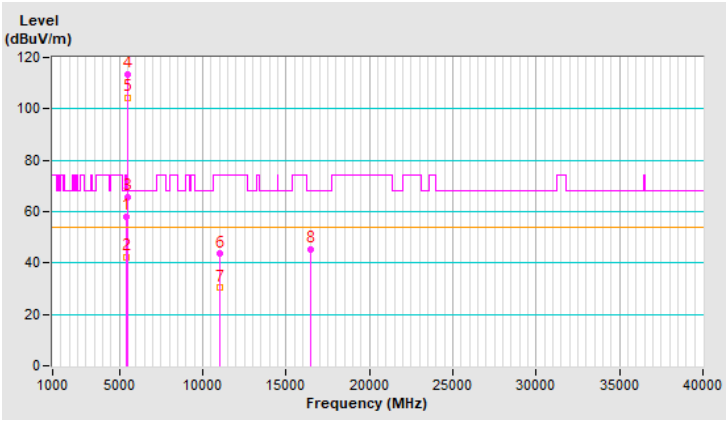


操 作 模 式 ：	發射	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 116：5.58 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=10Hz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	71%RH
測 試 日 期 ：	109 年 2 月 28 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	55.3 PK	74.0	-18.7	1.62 H	319	52.3	3.0
2	5460.00	42.2 AV	54.0	-11.8	1.62 H	319	39.2	3.0
3	#5470.00	55.7 PK	68.2	-12.5	1.62 H	319	52.6	3.1
4	*5580.00	118.5 PK			1.62 H	319	115.5	3.0
5	*5580.00	108.6 AV			1.62 H	319	105.6	3.0
6	11160.00	49.6 PK	74.0	-24.4	3.47 H	186	37.2	12.4
7	11160.00	36.3 AV	54.0	-17.7	3.47 H	186	23.9	12.4
8	#16740.00	47.7 PK	68.2	-20.5	1.66 H	181	32.9	14.8
9	22320.00	-	-	-	-	-	-	-
10	#27900.00	-	-	-	-	-	-	-
11	#33480.00	-	-	-	-	-	-	-
12	39060.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

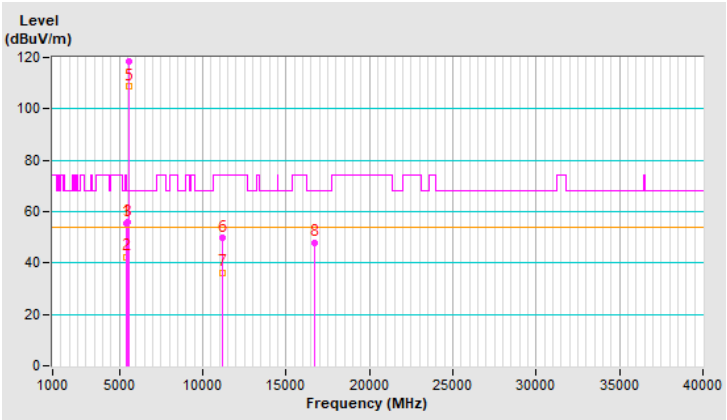


操 作 模 式 ：	發射	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 116：5.58 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=10Hz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	71%RH
測 試 日 期 ：	109 年 2 月 28 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	54.7 PK	74.0	-19.3	2.89 V	141	51.7	3.0
2	5460.00	41.6 AV	54.0	-12.4	2.89 V	141	38.6	3.0
3	#5470.00	55.2 PK	68.2	-13.0	2.89 V	141	52.1	3.1
4	*5580.00	115.7 PK			2.89 V	141	112.7	3.0
5	*5580.00	105.2 AV			2.89 V	141	102.2	3.0
6	11160.00	50.4 PK	74.0	-23.6	3.20 V	173	38.0	12.4
7	11160.00	36.5 AV	54.0	-17.5	3.20 V	173	24.1	12.4
8	#16740.00	48.6 PK	68.2	-19.6	3.50 V	172	33.8	14.8
9	22320.00	-	-	-	-	-	-	-
10	#27900.00	-	-	-	-	-	-	-
11	#33480.00	-	-	-	-	-	-	-
12	39060.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

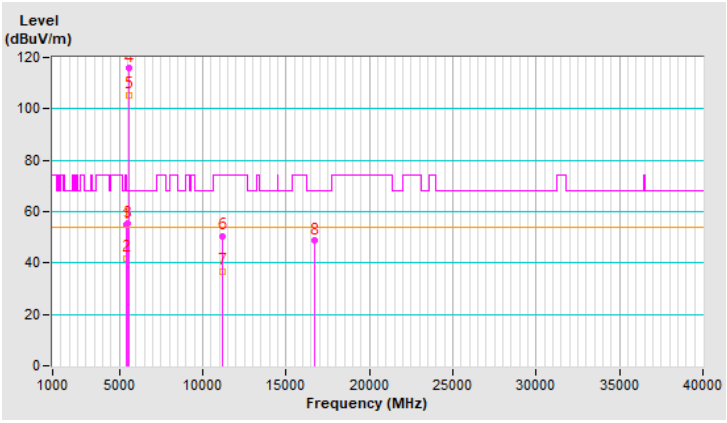


操 作 模 式 ：	發射	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 140：5.7 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=10Hz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	71%RH
測 試 日 期 ：	109 年 2 月 28 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5700.00	116.7 PK			1.58 H	69	113.5	3.2
2	*5700.00	107.6 AV			1.58 H	69	104.4	3.2
3	#5725.00	67.9 PK	68.2	-0.3	1.58 H	69	64.6	3.3
4	11400.00	42.6 PK	74.0	-31.4	3.64 H	183	29.6	13.0
5	11400.00	29.8 AV	54.0	-24.2	3.64 H	183	16.8	13.0
6	#17100.00	45.4 PK	68.2	-22.8	1.64 H	183	29.1	16.3
7	22800.00	-	-	-	-	-	-	-
8	#28500.00	-	-	-	-	-	-	-
9	#34200.00	-	-	-	-	-	-	-
10	39900.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

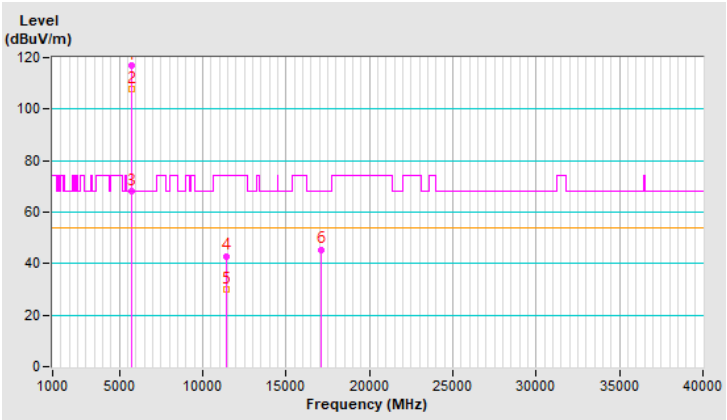


操 作 模 式 ：	發射	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 140：5.7 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=10Hz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	71%RH
測 試 日 期 ：	109 年 2 月 28 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5700.00	113.9 PK			2.82 V	139	110.7	3.2
2	*5700.00	104.4 AV			2.82 V	139	101.2	3.2
3	#5725.00	65.5 PK	68.2	-2.7	2.82 V	139	62.2	3.3
4	11400.00	43.7 PK	74.0	-30.3	3.10 V	193	30.7	13.0
5	11400.00	30.3 AV	54.0	-23.7	3.10 V	193	17.3	13.0
6	#17100.00	45.3 PK	68.2	-22.9	3.49 V	150	29.0	16.3
7	22800.00	-	-	-	-	-	-	-
8	#28500.00	-	-	-	-	-	-	-
9	#34200.00	-	-	-	-	-	-	-
10	39900.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

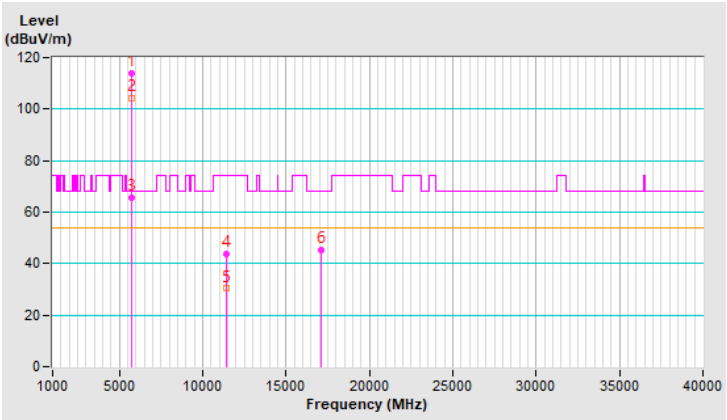


操 作 模 式 ：	發射	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 144：5.72 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=10Hz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	71%RH
測 試 日 期 ：	109 年 2 月 28 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	54.1 PK	74.0	-19.9	1.60 H	84	51.1	3.0
2	5460.00	40.2 AV	54.0	-13.8	1.60 H	84	37.2	3.0
3	#5470.00	52.0 PK	68.2	-16.2	1.60 H	84	48.9	3.1
4	*5720.00	118.3 PK			1.60 H	84	115.1	3.2
5	*5720.00	108.5 AV			1.60 H	84	105.3	3.2
6	#5850.00	55.0 PK	68.2	-13.2	1.60 H	84	51.3	3.7
7	11440.00	49.6 PK	74.0	-24.4	3.56 H	184	36.8	12.8
8	11440.00	36.6 AV	54.0	-17.4	3.56 H	184	23.8	12.8
9	#17160.00	47.5 PK	68.2	-20.7	1.67 H	188	30.9	16.6
10	22880.00	-	-	-	-	-	-	-
11	#28600.00	-	-	-	-	-	-	-
12	#34320.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

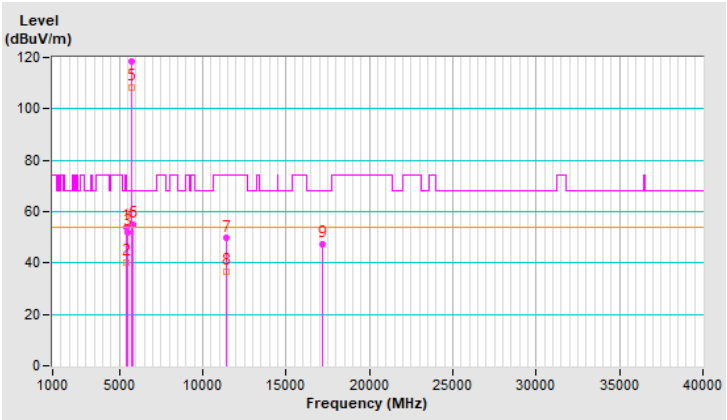


操 作 模 式 ：	發射	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 144：5.72 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=10Hz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	71%RH
測 試 日 期 ：	109 年 2 月 28 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	53.5 PK	74.0	-20.5	2.85 V	127	50.5	3.0
2	5460.00	39.7 AV	54.0	-14.3	2.85 V	127	36.7	3.0
3	#5470.00	51.4 PK	68.2	-16.8	2.85 V	127	48.3	3.1
4	*5720.00	116.0 PK			2.85 V	127	112.8	3.2
5	*5720.00	105.4 AV			2.85 V	127	102.2	3.2
6	#5850.00	54.2 PK	68.2	-14.0	2.85 V	127	50.5	3.7
7	11440.00	50.6 PK	74.0	-23.4	3.29 V	192	37.8	12.8
8	11440.00	36.9 AV	54.0	-17.1	3.29 V	192	24.1	12.8
9	#17160.00	48.4 PK	68.2	-19.8	3.49 V	164	31.8	16.6
10	22880.00	-	-	-	-	-	-	-
11	#28600.00	-	-	-	-	-	-	-
12	#34320.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

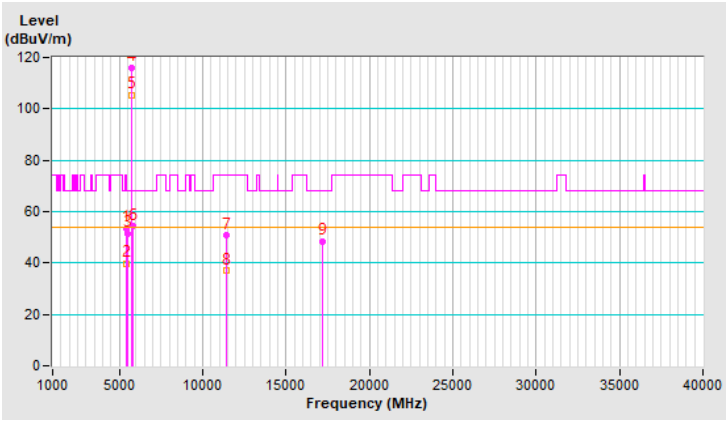


操 作 模 式 ：	發射	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 149：5.745 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=10Hz
量 測 場 地 溫 度 ：	23℃	量 測 場 地 濕 度 ：	67%RH
測 試 日 期 ：	109 年 1 月 22 日	測 試 者 ：	柯其宗

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5745.00	121.9 PK			1.58 H	70	118.6	3.3
2	*5745.00	112.0 AV			1.58 H	70	108.7	3.3
3	11490.00	53.3 PK	74.0	-20.7	2.78 H	244	40.7	12.6
4	11490.00	40.9 AV	54.0	-13.1	2.78 H	244	28.3	12.6
5	#17235.00	63.5 PK	68.2	-4.7	2.51 H	53	46.7	16.8
6	22982.00	62.1 PK	74.0	-11.9	1.67 H	76	84.0	-21.9
7	22982.00	50.6 AV	54.0	-3.4	1.67 H	76	72.5	-21.9
8	#28725.00	-	-	-	-	-	-	-
9	#34470.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

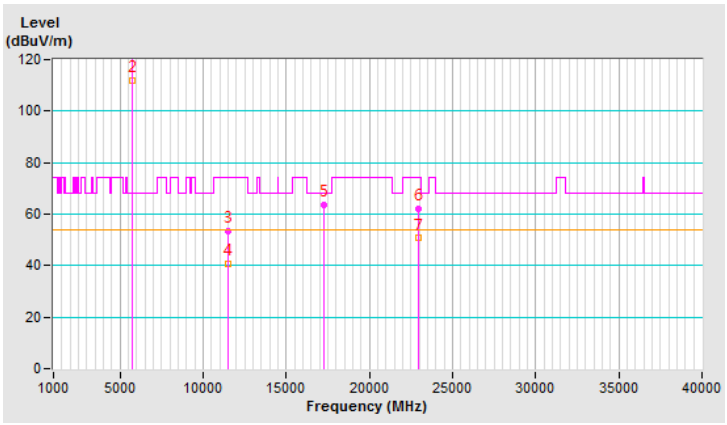


操 作 模 式 ：	發射	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 149：5.745 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=10Hz
量 測 場 地 溫 度 ：	23℃	量 測 場 地 濕 度 ：	67%RH
測 試 日 期 ：	109 年 1 月 22 日	測 試 者 ：	柯其宗

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5745.00	117.4 PK			3.80 V	353	114.1	3.3
2	*5745.00	107.1 AV			3.80 V	353	103.8	3.3
3	11490.00	53.2 PK	74.0	-20.8	1.88 V	153	40.6	12.6
4	11490.00	40.5 AV	54.0	-13.5	1.88 V	153	27.9	12.6
5	#17235.00	68.0 PK	68.2	-0.2	1.29 V	64	51.2	16.8
6	22982.00	65.3 PK	74.0	-8.7	1.50 V	138	87.2	-21.9
7	22982.00	53.8 AV	54.0	-0.2	1.50 V	138	75.7	-21.9
8	#28725.00	-	-	-	-	-	-	-
9	#34470.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

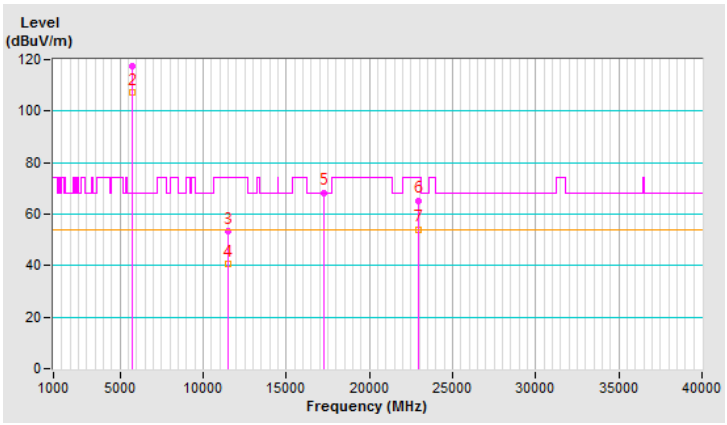


操 作 模 式 ：	發射	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 157：5.785 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=10Hz
量 測 場 地 溫 度 ：	23℃	量 測 場 地 濕 度 ：	67%RH
測 試 日 期 ：	109 年 1 月 22 日	測 試 者 ：	柯其宗

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5785.00	121.3 PK			1.62 H	58	117.9	3.4
2	*5785.00	111.5 AV			1.62 H	58	108.1	3.4
3	11570.00	53.2 PK	74.0	-20.8	2.79 H	247	41.0	12.2
4	11570.00	41.3 AV	54.0	-12.7	2.79 H	247	29.1	12.2
5	#17355.00	63.9 PK	68.2	-4.3	2.46 H	33	47.3	16.6
6	#23140.00	-	-	-	-	-	-	-
7	#28925.00	-	-	-	-	-	-	-
8	#34710.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

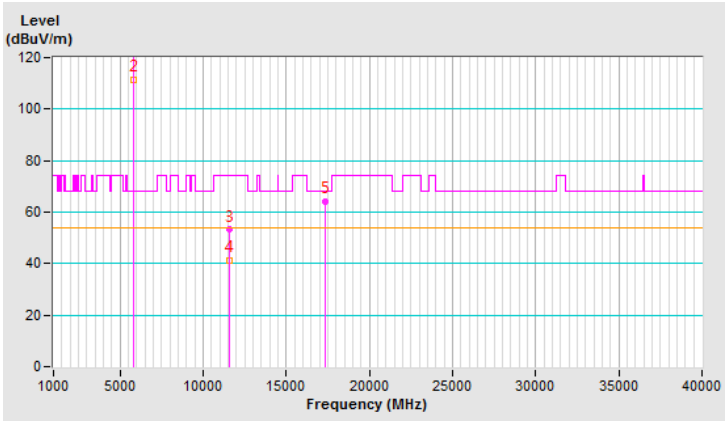


操 作 模 式 ：	發射	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 157：5.785 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=10Hz
量 測 場 地 溫 度 ：	23℃	量 測 場 地 濕 度 ：	67%RH
測 試 日 期 ：	109 年 1 月 22 日	測 試 者 ：	柯其宗

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5785.00	117.0 PK			3.97 V	356	113.6	3.4
2	*5785.00	107.5 AV			3.97 V	356	104.1	3.4
3	11570.00	53.0 PK	74.0	-21.0	1.93 V	154	40.8	12.2
4	11570.00	40.5 AV	54.0	-13.5	1.93 V	154	28.3	12.2
5	#17355.00	67.8 PK	68.2	-0.4	1.29 V	70	51.2	16.6
6	#23140.00	-	-	-	-	-	-	-
7	#28925.00	-	-	-	-	-	-	-
8	#34710.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

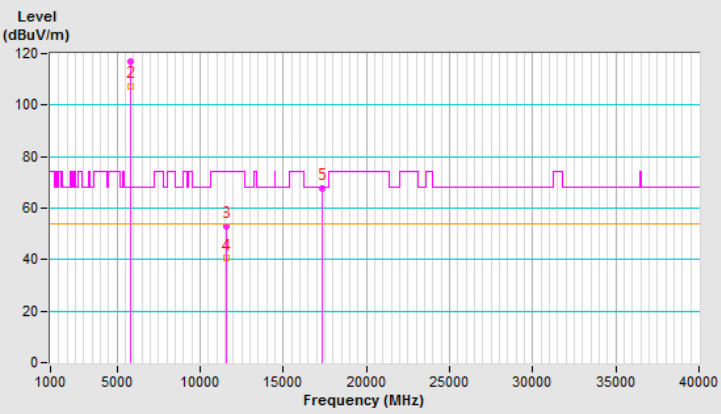


操 作 模 式 ：	發射	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 165：5.825 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=10Hz
量 測 場 地 溫 度 ：	23℃	量 測 場 地 濕 度 ：	67%RH
測 試 日 期 ：	109 年 1 月 22 日	測 試 者 ：	柯其宗

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5825.00	121.4 PK			1.69 H	58	117.8	3.6
2	*5825.00	111.7 AV			1.69 H	58	108.1	3.6
3	11650.00	52.9 PK	74.0	-21.1	2.74 H	244	40.5	12.4
4	11650.00	41.0 AV	54.0	-13.0	2.74 H	244	28.6	12.4
5	#17475.00	64.2 PK	68.2	-4.0	2.47 H	54	47.2	17.0
6	#23300.00	-	-	-	-	-	-	-
7	#29125.00	-	-	-	-	-	-	-
8	#34950.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

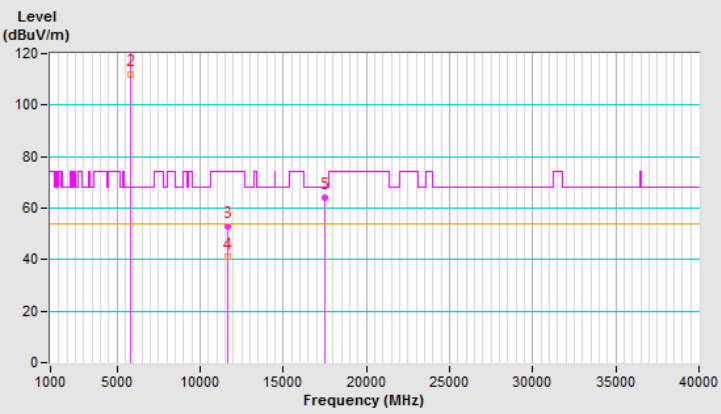


操 作 模 式 ：	發射	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 165：5.825 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=10Hz
量 測 場 地 溫 度 ：	23℃	量 測 場 地 濕 度 ：	67%RH
測 試 日 期 ：	109 年 1 月 22 日	測 試 者 ：	柯其宗

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5825.00	116.4 PK			2.94 V	344	112.8	3.6
2	*5825.00	107.2 AV			2.94 V	344	103.6	3.6
3	11650.00	53.5 PK	74.0	-20.5	1.87 V	143	41.1	12.4
4	11650.00	40.9 AV	54.0	-13.1	1.87 V	143	28.5	12.4
5	#17475.00	67.9 PK	68.2	-0.3	1.31 V	89	50.9	17.0
6	#23300.00	-	-	-	-	-	-	-
7	#29125.00	-	-	-	-	-	-	-
8	#34950.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

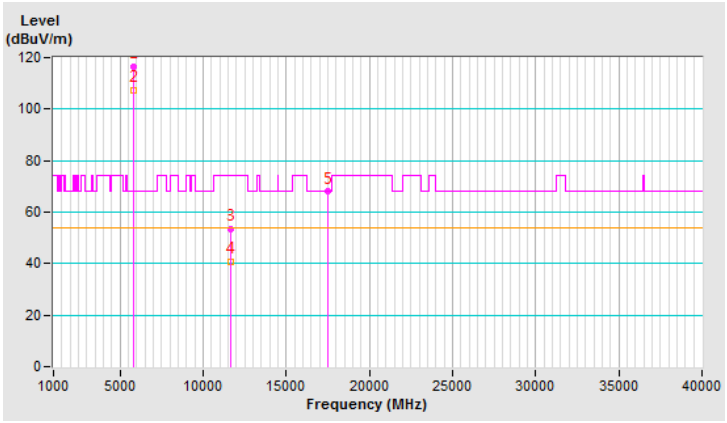


802.11ax (HE20)

操作模式：	發射	調變技術：	OFDMA
基本波頻率：	CH 36：5.18 GHz	測試儀器：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量測場地溫度：	23℃	量測場地濕度：	67%RH
測試日期：	109 年 1 月 22 日	測試者：	柯其宗

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	73.7 PK	74.0	-0.3	3.35 H	68	70.7	3.0
2	5150.00	53.9 AV	54.0	-0.1	3.35 H	68	50.9	3.0
3	*5180.00	117.3 PK			3.35 H	68	114.4	2.9
4	*5180.00	104.8 AV			3.35 H	68	101.9	2.9
5	#10360.00	45.7 PK	68.2	-22.5	2.71 H	262	33.7	12.0
6	15540.00	50.8 PK	74.0	-23.2	2.55 H	57	37.8	13.0
7	15540.00	38.7 AV	54.0	-15.3	2.55 H	57	25.7	13.0
8	20720.00	-	-	-	-	-	-	-
9	#25900.00	-	-	-	-	-	-	-
10	#31080.00	-	-	-	-	-	-	-
11	#36260.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

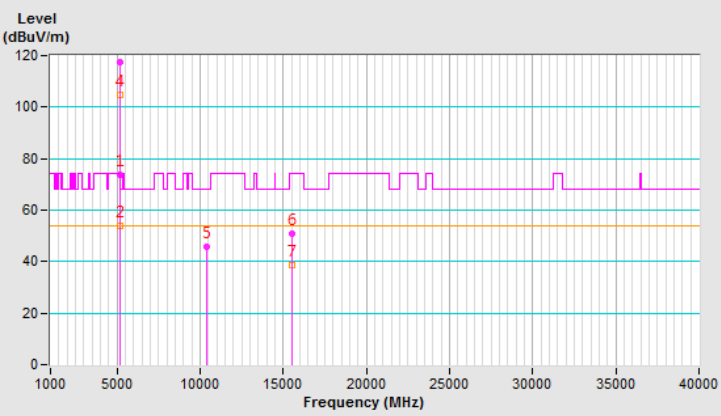


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 36：5.18 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	23℃	量 測 場 地 濕 度 ：	67%RH
測 試 日 期 ：	109 年 1 月 22 日	測 試 者 ：	柯其宗

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	69.1 PK	74.0	-4.9	2.27 V	360	66.1	3.0
2	5150.00	48.6 AV	54.0	-5.4	2.27 V	360	45.6	3.0
3	*5180.00	114.4 PK			2.27 V	360	111.5	2.9
4	*5180.00	101.5 AV			2.27 V	360	98.6	2.9
5	#10360.00	43.1 PK	68.2	-25.1	1.84 V	147	31.1	12.0
6	15540.00	52.4 PK	74.0	-21.6	1.33 V	53	39.4	13.0
7	15540.00	41.2 AV	54.0	-12.8	1.33 V	53	28.2	13.0
8	20720.00	-	-	-	-	-	-	-
9	#25900.00	-	-	-	-	-	-	-
10	#31080.00	-	-	-	-	-	-	-
11	#36260.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

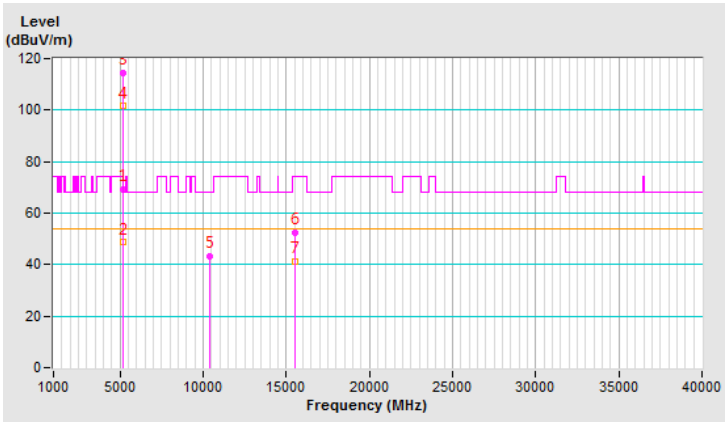


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 40：5.2 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	23℃	量 測 場 地 濕 度 ：	67%RH
測 試 日 期 ：	109 年 1 月 22 日	測 試 者 ：	柯其宗

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	72.9 PK	74.0	-1.1	3.72 H	69	69.9	3.0
2	5150.00	53.7 AV	54.0	-0.3	3.72 H	69	50.7	3.0
3	*5200.00	122.6 PK			3.72 H	69	119.8	2.8
4	*5200.00	109.8 AV			3.72 H	69	107.0	2.8
5	#10400.00	46.5 PK	68.2	-21.7	2.74 H	263	34.4	12.1
6	15600.00	49.9 PK	74.0	-24.1	2.47 H	68	37.0	12.9
7	15600.00	37.9 AV	54.0	-16.1	2.47 H	68	25.0	12.9
8	20800.00	-	-	-	-	-	-	-
9	#26000.00	-	-	-	-	-	-	-
10	31200.00	-	-	-	-	-	-	-
11	#36400.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

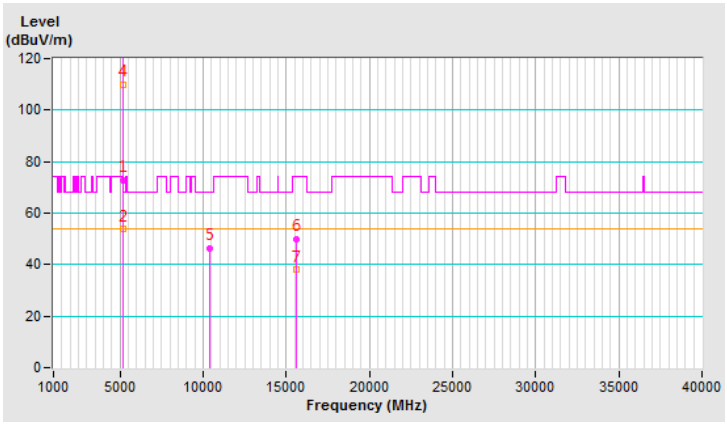


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 40：5.2 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	23℃	量 測 場 地 濕 度 ：	67%RH
測 試 日 期 ：	109 年 1 月 22 日	測 試 者 ：	柯其宗

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	69.9 PK	74.0	-4.1	2.26 V	360	66.9	3.0
2	5150.00	49.0 AV	54.0	-5.0	2.26 V	360	46.0	3.0
3	*5200.00	119.7 PK			2.26 V	360	116.9	2.8
4	*5200.00	106.6 AV			2.26 V	360	103.8	2.8
5	#10400.00	45.3 PK	68.2	-22.9	1.87 V	146	33.2	12.1
6	15600.00	54.7 PK	74.0	-19.3	1.36 V	64	41.8	12.9
7	15600.00	42.8 AV	54.0	-11.2	1.36 V	64	29.9	12.9
8	20800.00	-	-	-	-	-	-	-
9	#26000.00	-	-	-	-	-	-	-
10	31200.00	-	-	-	-	-	-	-
11	#36400.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

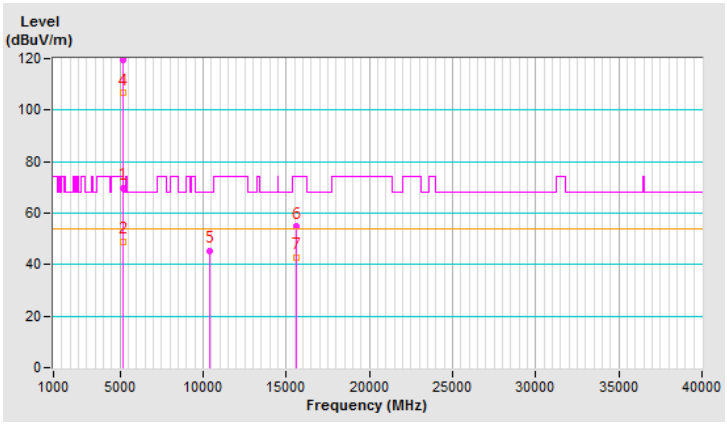


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 48：5.24 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	23℃	量 測 場 地 濕 度 ：	67%RH
測 試 日 期 ：	109 年 1 月 22 日	測 試 者 ：	柯其宗

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	56.4 PK	74.0	-17.6	3.67 H	65	53.4	3.0
2	5150.00	43.6 AV	54.0	-10.4	3.67 H	65	40.6	3.0
3	*5240.00	123.1 PK			3.67 H	65	120.5	2.6
4	*5240.00	110.4 AV			3.67 H	65	107.8	2.6
5	5350.00	54.6 PK	74.0	-19.4	3.67 H	65	52.0	2.6
6	5350.00	42.3 AV	54.0	-11.7	3.67 H	65	39.7	2.6
7	#10480.00	45.5 PK	68.2	-22.7	2.72 H	261	33.0	12.5
8	15720.00	50.6 PK	74.0	-23.4	2.52 H	56	38.4	12.2
9	15720.00	38.1 AV	54.0	-15.9	2.52 H	56	25.9	12.2
10	20960.00	-	-	-	-	-	-	-
11	#26200.00	-	-	-	-	-	-	-
12	31440.00	-	-	-	-	-	-	-
13	#36680.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

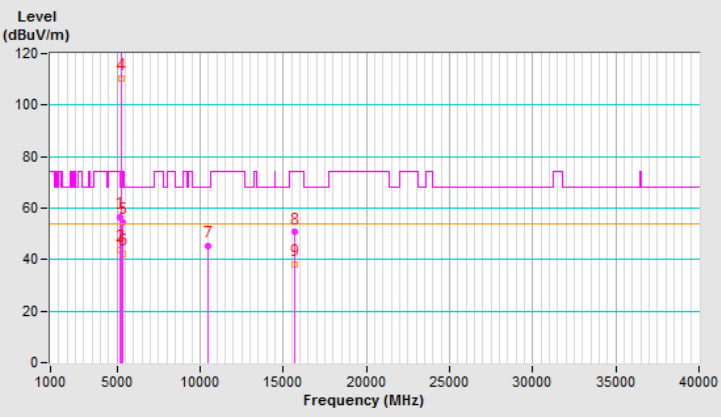


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 48：5.24 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	23℃	量 測 場 地 濕 度 ：	67%RH
測 試 日 期 ：	109 年 1 月 22 日	測 試 者 ：	柯其宗

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	57.1 PK	74.0	-16.9	2.29 V	360	54.1	3.0
2	5150.00	44.0 AV	54.0	-10.0	2.29 V	360	41.0	3.0
3	*5240.00	120.0 PK			2.29 V	360	117.4	2.6
4	*5240.00	106.7 AV			2.29 V	360	104.1	2.6
5	5350.00	55.1 PK	74.0	-18.9	2.29 V	360	52.5	2.6
6	5350.00	42.6 AV	54.0	-11.4	2.29 V	360	40.0	2.6
7	#10480.00	45.4 PK	68.2	-22.8	1.79 V	158	32.9	12.5
8	15720.00	55.1 PK	74.0	-18.9	1.38 V	65	42.9	12.2
9	15720.00	42.7 AV	54.0	-11.3	1.38 V	65	30.5	12.2
10	20960.00	-	-	-	-	-	-	-
11	#26200.00	-	-	-	-	-	-	-
12	31440.00	-	-	-	-	-	-	-
13	#36680.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

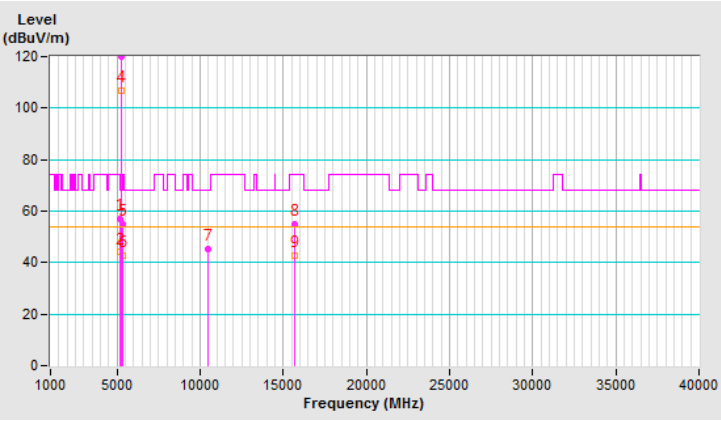


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 52：5.26 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	71%RH
測 試 日 期 ：	109 年 2 月 28 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	56.3 PK	74.0	-17.7	1.53 H	72	53.3	3.0
2	5150.00	45.7 AV	54.0	-8.3	1.53 H	72	42.7	3.0
3	*5260.00	119.2 PK			1.53 H	72	116.7	2.5
4	*5260.00	108.5 AV			1.53 H	72	106.0	2.5
5	#10520.00	43.1 PK	68.2	-25.1	3.54 H	190	30.5	12.6
6	15780.00	45.6 PK	74.0	-28.4	1.65 H	205	33.8	11.8
7	15780.00	34.3 AV	54.0	-19.7	1.65 H	205	22.5	11.8
8	21040.00	-	-	-	-	-	-	-
9	#26300.00	-	-	-	-	-	-	-
10	31560.00	-	-	-	-	-	-	-
11	#36820.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

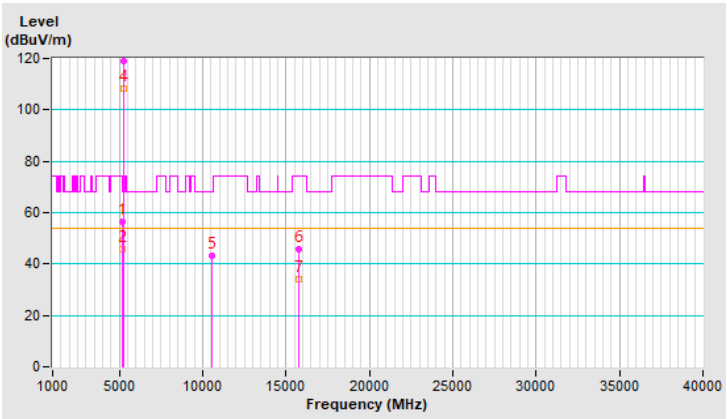


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 52：5.26 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	71%RH
測 試 日 期 ：	109 年 2 月 28 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	55.3 PK	74.0	-18.7	2.84 V	142	52.3	3.0
2	5150.00	44.5 AV	54.0	-9.5	2.84 V	142	41.5	3.0
3	*5260.00	115.9 PK			2.84 V	142	113.4	2.5
4	*5260.00	105.2 AV			2.84 V	142	102.7	2.5
5	#10520.00	43.7 PK	68.2	-24.5	3.13 V	191	31.1	12.6
6	15780.00	45.8 PK	74.0	-28.2	3.50 V	152	34.0	11.8
7	15780.00	34.2 AV	54.0	-19.8	3.50 V	152	22.4	11.8
8	21040.00	-	-	-	-	-	-	-
9	#26300.00	-	-	-	-	-	-	-
10	31560.00	-	-	-	-	-	-	-
11	#36820.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

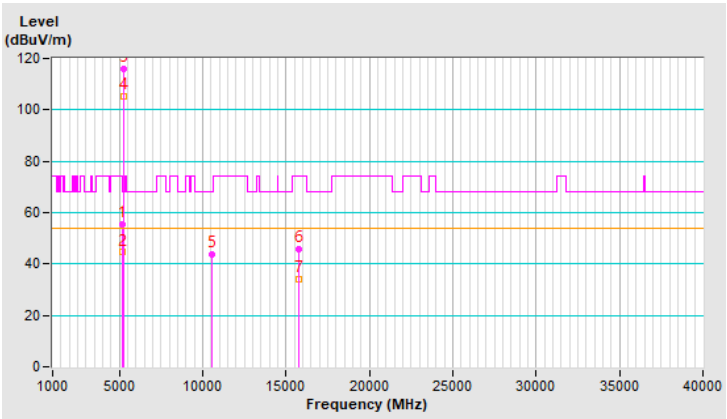


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 60：5.3 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	71%RH
測 試 日 期 ：	109 年 2 月 28 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5300.00	119.0 PK			1.57 H	68	116.6	2.4
2	*5300.00	108.4 AV			1.57 H	68	106.0	2.4
3	5350.00	66.7 PK	74.0	-7.3	1.57 H	68	64.1	2.6
4	5350.00	49.2 AV	54.0	-4.8	1.57 H	68	46.6	2.6
5	10600.00	43.3 PK	74.0	-30.7	3.63 H	187	30.9	12.4
6	10600.00	30.6 AV	54.0	-23.4	3.63 H	187	18.2	12.4
7	15900.00	45.1 PK	74.0	-28.9	1.61 H	200	33.0	12.1
8	15900.00	34.5 AV	54.0	-19.5	1.61 H	200	22.4	12.1
9	21200.00	-	-	-	-	-	-	-
10	#26500.00	-	-	-	-	-	-	-
11	31800.00	-	-	-	-	-	-	-
12	#37100.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

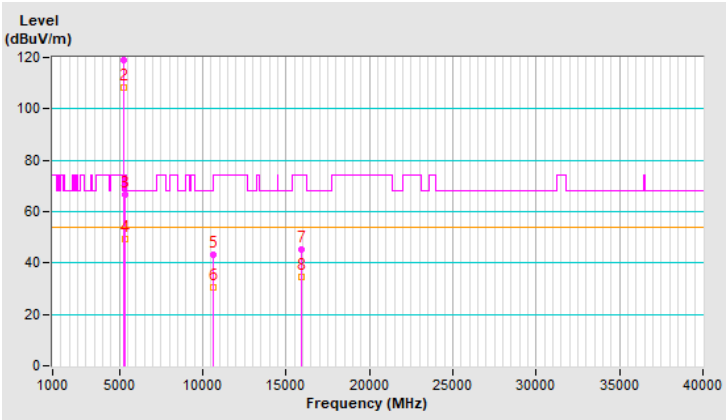


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 60：5.3 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	71%RH
測 試 日 期 ：	109 年 2 月 28 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5300.00	116.4 PK			2.93 V	125	114.0	2.4
2	*5300.00	105.4 AV			2.93 V	125	103.0	2.4
3	5350.00	63.6 PK	74.0	-10.4	2.93 V	125	61.0	2.6
4	5350.00	47.5 AV	54.0	-6.5	2.93 V	125	44.9	2.6
5	10600.00	43.6 PK	74.0	-30.4	3.13 V	188	31.2	12.4
6	10600.00	30.3 AV	54.0	-23.7	3.13 V	188	17.9	12.4
7	15900.00	44.9 PK	74.0	-29.1	3.50 V	173	32.8	12.1
8	15900.00	34.2 AV	54.0	-19.8	3.50 V	173	22.1	12.1
9	21200.00	-	-	-	-	-	-	-
10	#26500.00	-	-	-	-	-	-	-
11	31800.00	-	-	-	-	-	-	-
12	#37100.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

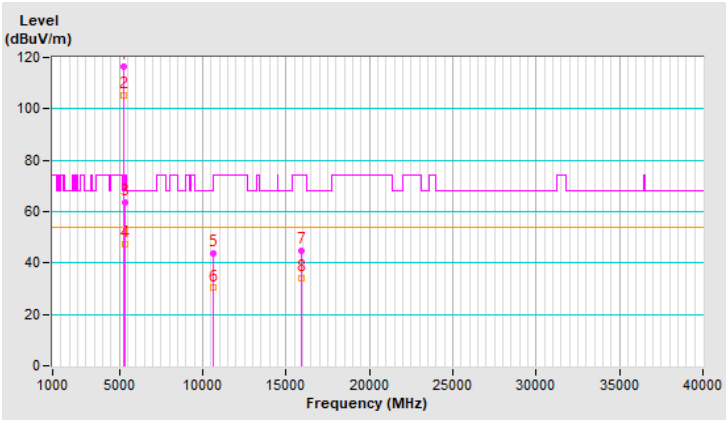


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 64：5.32 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	71%RH
測 試 日 期 ：	109 年 2 月 28 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5320.00	118.6 PK			1.58 H	64	116.1	2.5
2	*5320.00	107.5 AV			1.58 H	64	105.0	2.5
3	5350.00	73.6 PK	74.0	-0.4	1.58 H	64	71.0	2.6
4	5350.00	53.7 AV	54.0	-0.3	1.58 H	64	51.1	2.6
5	10640.00	42.6 PK	74.0	-31.4	3.54 H	200	30.2	12.4
6	10640.00	29.7 AV	54.0	-24.3	3.54 H	200	17.3	12.4
7	15960.00	45.4 PK	74.0	-28.6	1.56 H	197	33.0	12.4
8	15960.00	34.1 AV	54.0	-19.9	1.56 H	197	21.7	12.4
9	21280.00	-	-	-	-	-	-	-
10	#26600.00	-	-	-	-	-	-	-
11	#31920.00	-	-	-	-	-	-	-
12	#37240.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

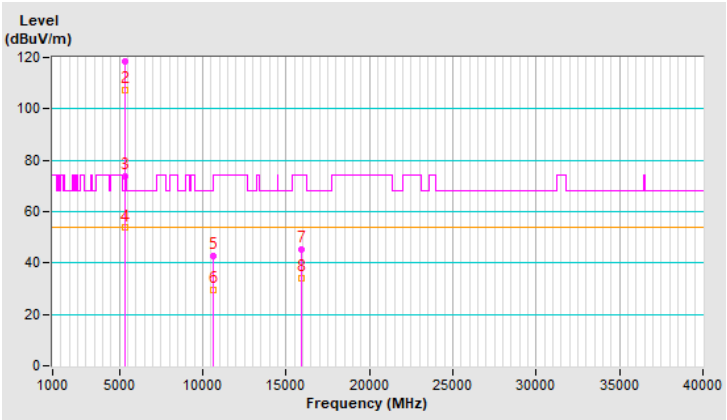


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 64：5.32 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	71%RH
測 試 日 期 ：	109 年 2 月 28 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5320.00	115.4 PK			2.94 V	121	112.9	2.5
2	*5320.00	104.6 AV			2.94 V	121	102.1	2.5
3	5350.00	66.3 PK	74.0	-7.7	2.94 V	121	63.7	2.6
4	5350.00	50.5 AV	54.0	-3.5	2.94 V	121	47.9	2.6
5	10640.00	43.8 PK	74.0	-30.2	3.20 V	169	31.4	12.4
6	10640.00	30.5 AV	54.0	-23.5	3.20 V	169	18.1	12.4
7	15960.00	45.0 PK	74.0	-29.0	3.48 V	151	32.6	12.4
8	15960.00	34.8 AV	54.0	-19.2	3.48 V	151	22.4	12.4
9	21280.00	-	-	-	-	-	-	-
10	#26600.00	-	-	-	-	-	-	-
11	#31920.00	-	-	-	-	-	-	-
12	#37240.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

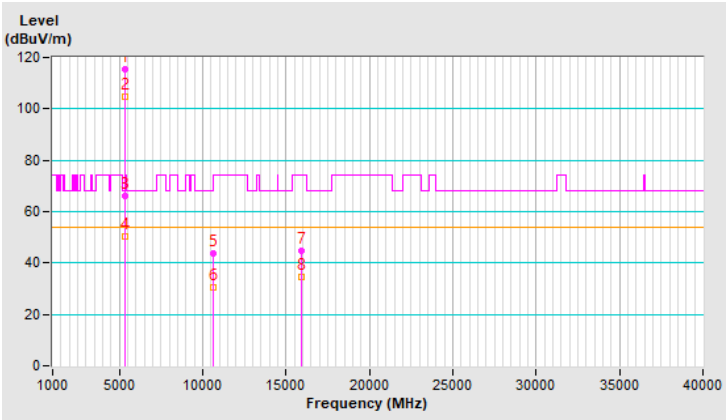


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 100：5.5 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	71%RH
測 試 日 期 ：	109 年 2 月 28 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	55.3 PK	74.0	-18.7	1.64 H	57	52.3	3.0
2	5460.00	42.6 AV	54.0	-11.4	1.64 H	57	39.6	3.0
3	#5470.00	67.9 PK	68.2	-0.3	1.64 H	57	64.8	3.1
4	*5500.00	115.9 PK			1.64 H	57	112.8	3.1
5	*5500.00	104.2 AV			1.64 H	57	101.1	3.1
6	#6500.00	45.9 PK	68.2	-22.3	1.57 H	203	40.0	5.9
7	11000.00	42.7 PK	74.0	-31.3	3.63 H	192	30.1	12.6
8	11000.00	29.9 AV	54.0	-24.1	3.63 H	192	17.3	12.6
9	#16500.00	-	-	-	-	-	-	-
10	#22000.00	-	-	-	-	-	-	-
11	#27500.00	-	-	-	-	-	-	-
12	#33000.00	-	-	-	-	-	-	-
13	#38500.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

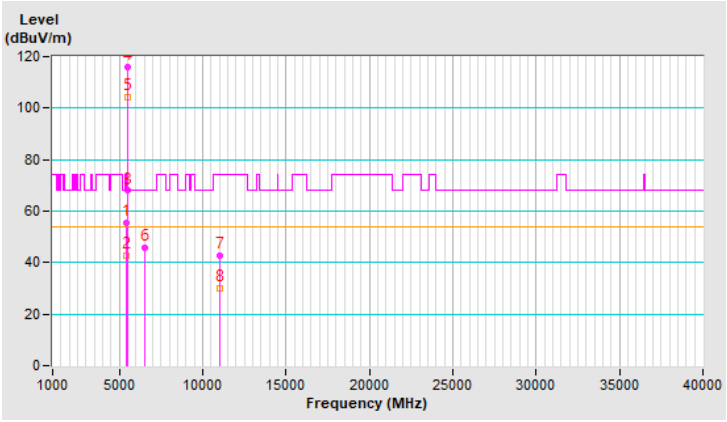


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 100：5.5 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	71%RH
測 試 日 期 ：	109 年 2 月 28 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	55.0 PK	74.0	-19.0	2.83 V	132	52.0	3.0
2	5460.00	42.4 AV	54.0	-11.6	2.83 V	132	39.4	3.0
3	#5470.00	66.1 PK	68.2	-2.1	2.83 V	132	63.0	3.1
4	*5500.00	113.3 PK			2.83 V	132	110.2	3.1
5	*5500.00	101.5 AV			2.83 V	132	98.4	3.1
6	11000.00	43.7 PK	74.0	-30.3	3.14 V	185	31.1	12.6
7	11000.00	30.4 AV	54.0	-23.6	3.14 V	185	17.8	12.6
8	#16500.00	45.4 PK	68.2	-22.8	3.51 V	165	31.8	13.6
9	#22000.00	-	-	-	-	-	-	-
10	#27500.00	-	-	-	-	-	-	-
11	#33000.00	-	-	-	-	-	-	-
12	#38500.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

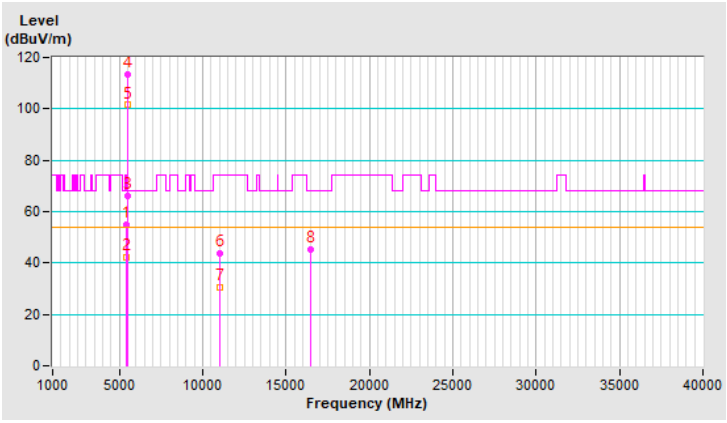


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 116：5.58 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	71%RH
測 試 日 期 ：	109 年 2 月 28 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5580.00	119.1 PK			1.62 H	71	116.1	3.0
2	*5580.00	108.6 AV			1.62 H	71	105.6	3.0
3	11160.00	42.5 PK	74.0	-31.5	3.58 H	199	30.1	12.4
4	11160.00	29.8 AV	54.0	-24.2	3.58 H	199	17.4	12.4
5	#16740.00	45.8 PK	68.2	-22.4	1.58 H	207	31.0	14.8
6	22320.00	-	-	-	-	-	-	-
7	#27900.00	-	-	-	-	-	-	-
8	#33480.00	-	-	-	-	-	-	-
9	39060.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

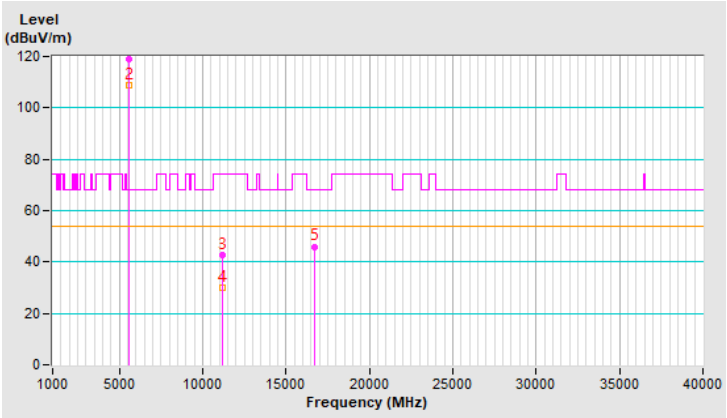


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 116：5.58 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	71%RH
測 試 日 期 ：	109 年 2 月 28 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5580.00	116.3 PK			2.88 V	143	113.3	3.0
2	*5580.00	105.2 AV			2.88 V	143	102.2	3.0
3	11160.00	44.0 PK	74.0	-30.0	3.14 V	175	31.6	12.4
4	11160.00	30.7 AV	54.0	-23.3	3.14 V	175	18.3	12.4
5	#16740.00	45.1 PK	68.2	-23.1	3.56 V	152	30.3	14.8
6	22320.00	-	-	-	-	-	-	-
7	#27900.00	-	-	-	-	-	-	-
8	#33480.00	-	-	-	-	-	-	-
9	39060.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

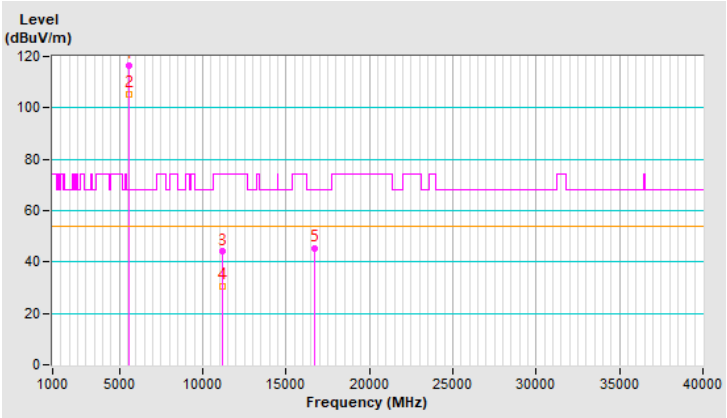


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 140：5.7 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	71%RH
測 試 日 期 ：	109 年 2 月 28 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5700.00	116.7 PK			1.57 H	58	113.5	3.2
2	*5700.00	105.1 AV			1.57 H	58	101.9	3.2
3	#5725.00	67.8 PK	68.2	-0.4	1.57 H	58	64.5	3.3
4	11400.00	42.5 PK	74.0	-31.5	3.56 H	181	29.5	13.0
5	11400.00	29.8 AV	54.0	-24.2	3.56 H	181	16.8	13.0
6	#17100.00	45.5 PK	68.2	-22.7	1.62 H	192	29.2	16.3
7	22800.00	-	-	-	-	-	-	-
8	#28500.00	-	-	-	-	-	-	-
9	#34200.00	-	-	-	-	-	-	-
10	39900.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

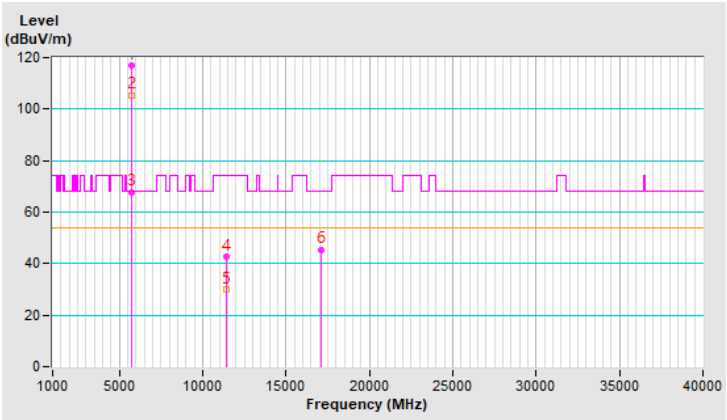


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 140：5.7 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	71%RH
測 試 日 期 ：	109 年 2 月 28 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5700.00	112.8 PK			2.93 V	139	109.6	3.2
2	*5700.00	101.2 AV			2.93 V	139	98.0	3.2
3	#5725.00	65.7 PK	68.2	-2.5	2.93 V	139	62.4	3.3
4	11400.00	43.3 PK	74.0	-30.7	3.19 V	167	30.3	13.0
5	11400.00	30.3 AV	54.0	-23.7	3.19 V	167	17.3	13.0
6	#17100.00	45.7 PK	68.2	-22.5	3.52 V	170	29.4	16.3
7	22800.00	-	-	-	-	-	-	-
8	#28500.00	-	-	-	-	-	-	-
9	#34200.00	-	-	-	-	-	-	-
10	39900.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

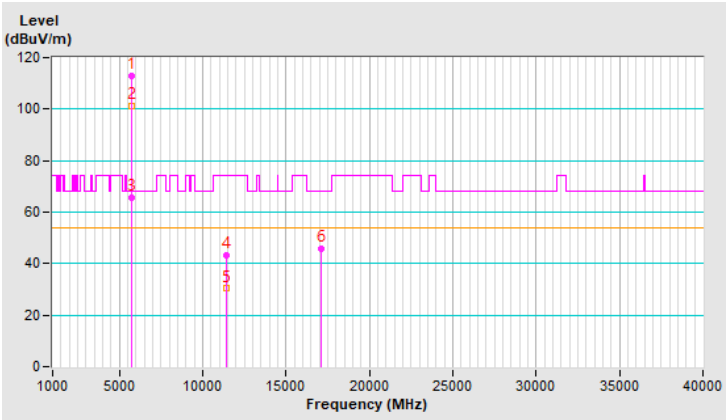


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 144：5.72 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	71%RH
測 試 日 期 ：	109 年 2 月 28 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	55.4 PK	74.0	-18.6	1.62 H	43	52.4	3.0
2	5460.00	41.6 AV	54.0	-12.4	1.62 H	43	38.6	3.0
3	#5470.00	56.3 PK	68.2	-11.9	1.62 H	43	53.2	3.1
4	*5720.00	119.7 PK			1.62 H	43	116.5	3.2
5	*5720.00	108.8 AV			1.62 H	43	105.6	3.2
6	#5850.00	55.2 PK	68.2	-13.0	1.62 H	43	51.5	3.7
7	11440.00	43.3 PK	74.0	-30.7	3.61 H	197	30.5	12.8
8	11440.00	30.4 AV	54.0	-23.6	3.61 H	197	17.6	12.8
9	#17160.00	45.4 PK	68.2	-22.8	1.54 H	204	28.8	16.6
10	22880.00	-	-	-	-	-	-	-
11	#28600.00	-	-	-	-	-	-	-
12	#34320.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

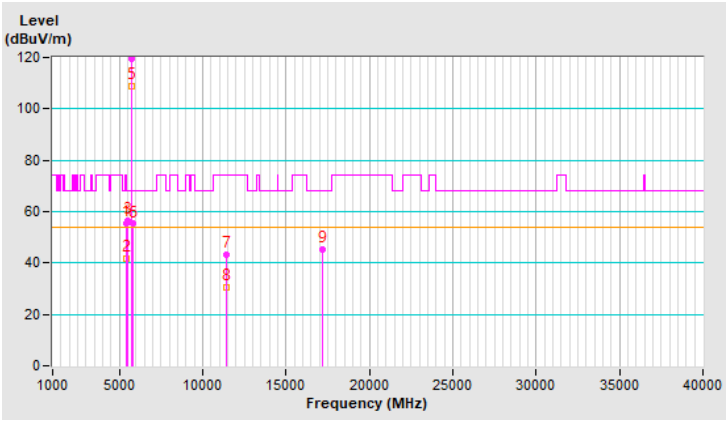


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 144：5.72 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	71%RH
測 試 日 期 ：	109 年 2 月 28 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	55.0 PK	74.0	-19.0	2.86 V	127	52.0	3.0
2	5460.00	41.2 AV	54.0	-12.8	2.86 V	127	38.2	3.0
3	#5470.00	55.7 PK	68.2	-12.5	2.86 V	127	52.6	3.1
4	*5720.00	116.2 PK			2.86 V	127	113.0	3.2
5	*5720.00	105.3 AV			2.86 V	127	102.1	3.2
6	#5850.00	55.0 PK	68.2	-13.2	2.86 V	127	51.3	3.7
7	11440.00	43.3 PK	74.0	-30.7	3.21 V	191	30.5	12.8
8	11440.00	30.2 AV	54.0	-23.8	3.21 V	191	17.4	12.8
9	#17160.00	44.9 PK	68.2	-23.3	3.55 V	163	28.3	16.6
10	22880.00	-	-	-	-	-	-	-
11	#28600.00	-	-	-	-	-	-	-
12	#34320.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

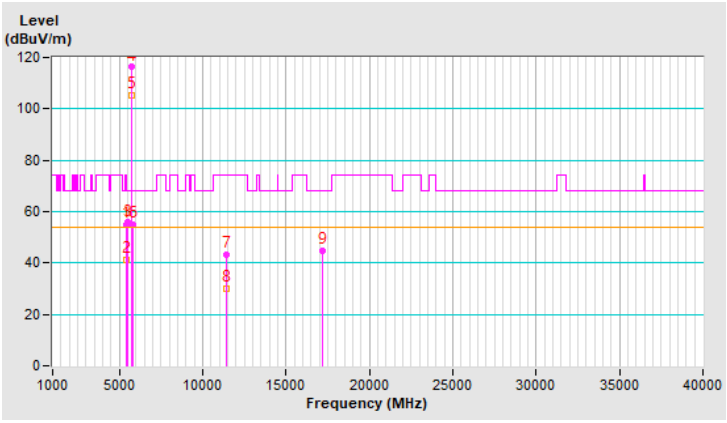


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 149：5.745 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	23℃	量 測 場 地 濕 度 ：	67%RH
測 試 日 期 ：	109 年 1 月 22 日	測 試 者 ：	柯其宗

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5745.00	112.6 PK			1.56 H	56	109.3	3.3
2	*5745.00	112.1 AV			1.56 H	56	108.8	3.3
3	11490.00	53.1 PK	74.0	-20.9	2.77 H	228	40.5	12.6
4	11490.00	41.3 AV	54.0	-12.7	2.77 H	228	28.7	12.6
5	#17235.00	63.9 PK	68.2	-4.3	2.42 H	49	47.1	16.8
6	22980.00	-	-	-	-	-	-	-
7	#28725.00	-	-	-	-	-	-	-
8	#34470.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

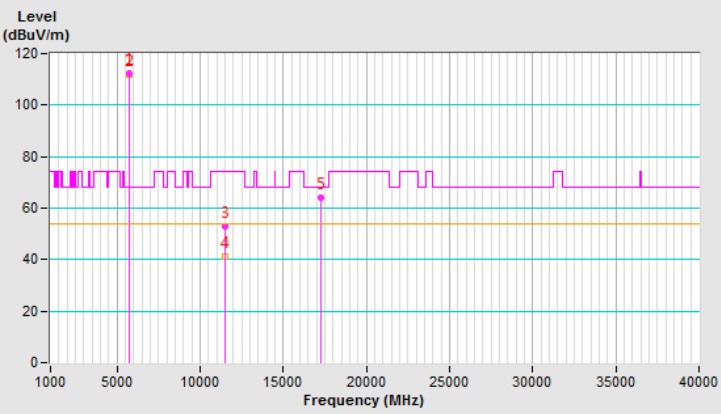


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 149：5.745 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	23℃	量 測 場 地 濕 度 ：	67%RH
測 試 日 期 ：	109 年 1 月 22 日	測 試 者 ：	柯其宗

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5745.00	121.4 PK			3.89 V	354	118.1	3.3
2	*5745.00	109.8 AV			3.89 V	354	106.5	3.3
3	11490.00	52.8 PK	74.0	-21.2	1.97 V	157	40.2	12.6
4	11490.00	40.6 AV	54.0	-13.4	1.97 V	157	28.0	12.6
5	#17235.00	68.0 PK	68.2	-0.2	1.27 V	68	51.2	16.8
6	22980.00	-	-	-	-	-	-	-
7	#28725.00	-	-	-	-	-	-	-
8	#34470.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

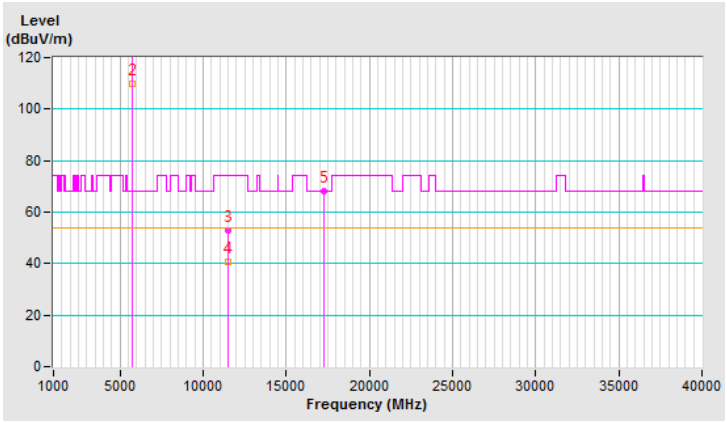


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 157：5.785 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	23℃	量 測 場 地 濕 度 ：	67%RH
測 試 日 期 ：	109 年 1 月 22 日	測 試 者 ：	柯其宗

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5785.00	122.4 PK			1.68 H	59	119.0	3.4
2	*5785.00	111.8 AV			1.68 H	59	108.4	3.4
3	11570.00	53.6 PK	74.0	-20.4	2.72 H	254	41.4	12.2
4	11570.00	41.5 AV	54.0	-12.5	2.72 H	254	29.3	12.2
5	#17355.00	64.3 PK	68.2	-3.9	2.52 H	53	47.7	16.6
6	#23140.00	-	-	-	-	-	-	-
7	#28925.00	-	-	-	-	-	-	-
8	#34710.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

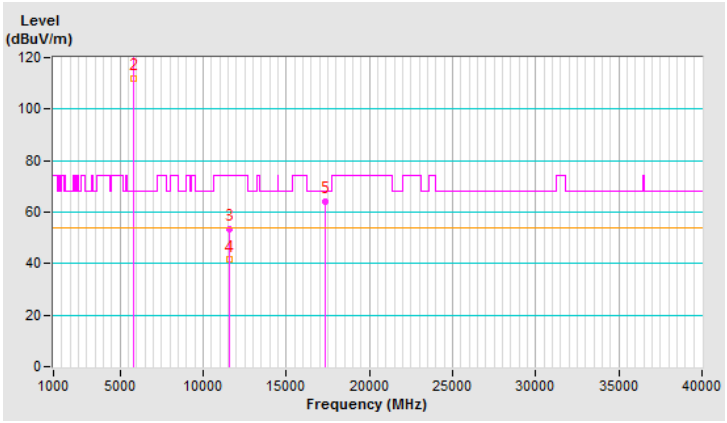


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 157：5.785 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	23℃	量 測 場 地 濕 度 ：	67%RH
測 試 日 期 ：	109 年 1 月 22 日	測 試 者 ：	柯其宗

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5785.00	120.9 PK			3.97 V	357	117.5	3.4
2	*5785.00	109.4 AV			3.97 V	357	106.0	3.4
3	11570.00	53.6 PK	74.0	-20.4	1.96 V	158	41.4	12.2
4	11570.00	40.9 AV	54.0	-13.1	1.96 V	158	28.7	12.2
5	#17355.00	67.8 PK	68.2	-0.4	1.16 V	69	51.2	16.6
6	#23140.00	-	-	-	-	-	-	-
7	#28925.00	-	-	-	-	-	-	-
8	#34710.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

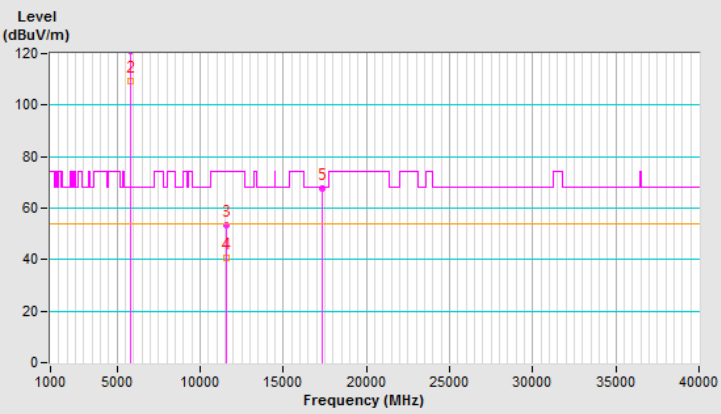


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 165：5.825 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	23℃	量 測 場 地 濕 度 ：	67%RH
測 試 日 期 ：	109 年 1 月 22 日	測 試 者 ：	柯其宗

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5825.00	122.1 PK			1.69 H	60	118.5	3.6
2	*5825.00	111.4 AV			1.69 H	60	107.8	3.6
3	11650.00	53.5 PK	74.0	-20.5	2.70 H	253	41.1	12.4
4	11650.00	41.3 AV	54.0	-12.7	2.70 H	253	28.9	12.4
5	#17475.00	64.2 PK	68.2	-4.0	2.52 H	63	47.2	17.0
6	#23300.00	-	-	-	-	-	-	-
7	#29125.00	-	-	-	-	-	-	-
8	#34950.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

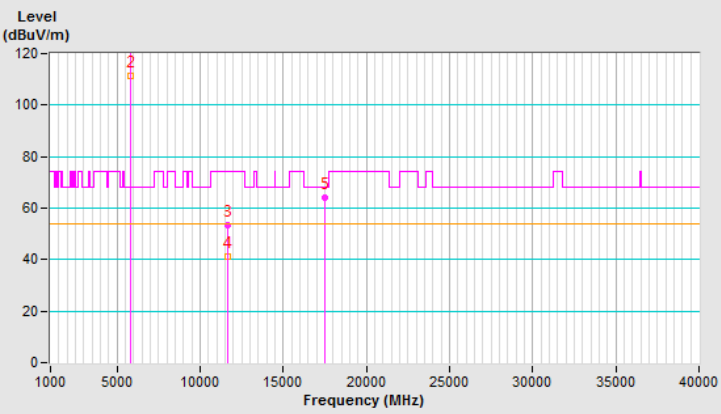


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 165：5.825 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	23℃	量 測 場 地 濕 度 ：	67%RH
測 試 日 期 ：	109 年 1 月 22 日	測 試 者 ：	柯其宗

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5825.00	120.7 PK			3.89 V	350	117.1	3.6
2	*5825.00	109.3 AV			3.89 V	350	105.7	3.6
3	11650.00	53.0 PK	74.0	-21.0	1.95 V	169	40.6	12.4
4	11650.00	40.6 AV	54.0	-13.4	1.95 V	169	28.2	12.4
5	#17475.00	68.0 PK	68.2	-0.2	1.14 V	69	51.0	17.0
6	#23300.00	-	-	-	-	-	-	-
7	#29125.00	-	-	-	-	-	-	-
8	#34950.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

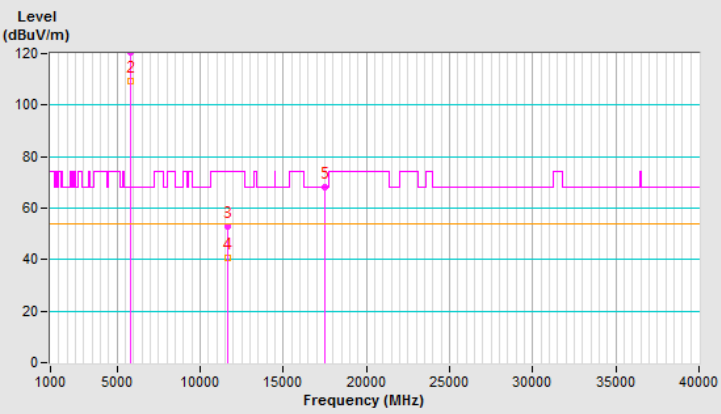


802.11ax (HE40)

操作模式 ：	發射	調變技術 ：	OFDMA
基本波頻率 ：	CH 38：5.19 GHz	測試儀器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=2kHz
量測場地溫度 ：	23℃	量測場地濕度 ：	67%RH
測試日期 ：	109 年 1 月 22 日	測試者 ：	柯其宗

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	67.7 PK	74.0	-6.3	3.20 H	69	64.7	3.0
2	5150.00	53.7 AV	54.0	-0.3	3.20 H	69	50.7	3.0
3	*5190.00	111.6 PK			3.20 H	69	108.7	2.9
4	*5190.00	99.7 AV			3.20 H	69	96.8	2.9
5	#10380.00	44.0 PK	68.2	-24.2	2.73 H	264	31.8	12.2
6	15570.00	50.0 PK	74.0	-24.0	2.43 H	72	37.0	13.0
7	15570.00	38.2 AV	54.0	-15.8	2.43 H	72	25.2	13.0
8	20760.00	-	-	-	-	-	-	-
9	#25950.00	-	-	-	-	-	-	-
10	#31140.00	-	-	-	-	-	-	-
11	#36330.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

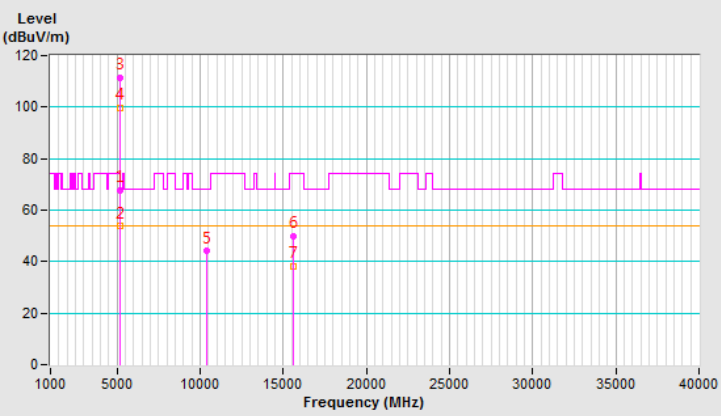


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 38：5.19 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=2kHz
量 測 場 地 溫 度 ：	23℃	量 測 場 地 濕 度 ：	67%RH
測 試 日 期 ：	109 年 1 月 22 日	測 試 者 ：	柯其宗

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	63.0 PK	74.0	-11.0	2.34 V	360	60.0	3.0
2	5150.00	48.7 AV	54.0	-5.3	2.34 V	360	45.7	3.0
3	*5190.00	107.8 PK			2.34 V	360	104.9	2.9
4	*5190.00	95.2 AV			2.34 V	360	92.3	2.9
5	#10380.00	43.4 PK	68.2	-24.8	1.82 V	137	31.2	12.2
6	15570.00	52.6 PK	74.0	-21.4	1.32 V	75	39.6	13.0
7	15570.00	40.8 AV	54.0	-13.2	1.32 V	75	27.8	13.0
8	20760.00	-	-	-	-	-	-	-
9	#25950.00	-	-	-	-	-	-	-
10	#31140.00	-	-	-	-	-	-	-
11	#36330.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

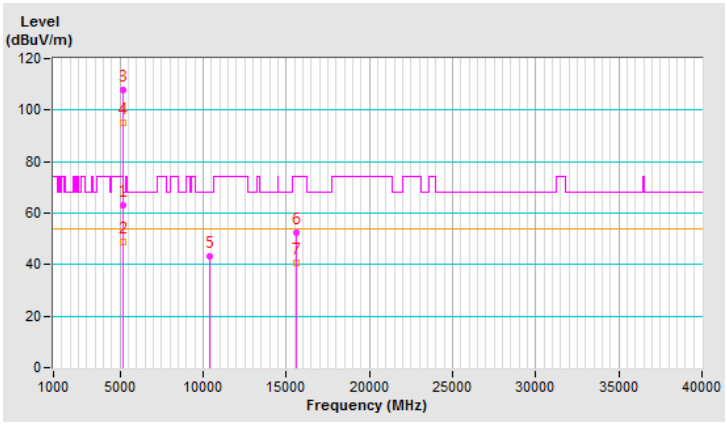


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 46：5.23 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=2kHz
量 測 場 地 溫 度 ：	23℃	量 測 場 地 濕 度 ：	67%RH
測 試 日 期 ：	109 年 1 月 22 日	測 試 者 ：	柯其宗

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	68.1 PK	74.0	-5.9	3.20 H	66	65.1	3.0
2	5150.00	53.8 AV	54.0	-0.2	3.20 H	66	50.8	3.0
3	*5230.00	116.2 PK			3.20 H	66	113.6	2.6
4	*5230.00	106.0 AV			3.20 H	66	103.4	2.6
5	5350.00	59.1 PK	74.0	-14.9	3.20 H	66	56.5	2.6
6	5350.00	43.6 AV	54.0	-10.4	3.20 H	66	41.0	2.6
7	#10460.00	46.9 PK	68.2	-21.3	2.74 H	277	34.5	12.4
8	15690.00	50.1 PK	74.0	-23.9	2.46 H	84	37.7	12.4
9	15690.00	38.0 AV	54.0	-16.0	2.46 H	84	25.6	12.4
10	20920.00	-	-	-	-	-	-	-
11	#26150.00	-	-	-	-	-	-	-
12	31380.00	-	-	-	-	-	-	-
13	#36610.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

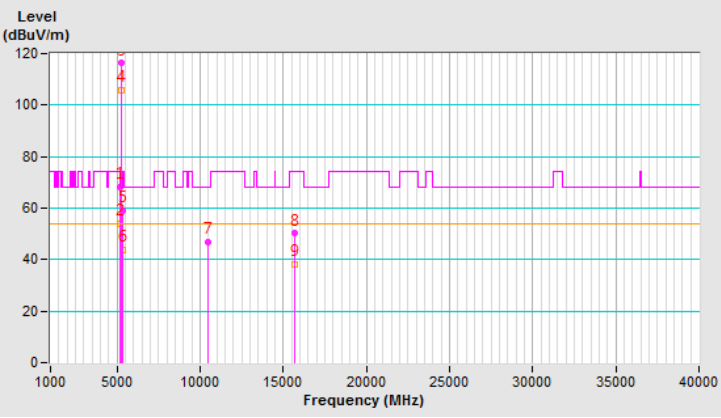


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 46：5.23 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=2kHz
量 測 場 地 溫 度 ：	23℃	量 測 場 地 濕 度 ：	67%RH
測 試 日 期 ：	109 年 1 月 22 日	測 試 者 ：	柯其宗

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	63.3 PK	74.0	-10.7	2.33 V	360	60.3	3.0
2	5150.00	49.1 AV	54.0	-4.9	2.33 V	360	46.1	3.0
3	*5230.00	111.1 PK			2.33 V	360	108.5	2.6
4	*5230.00	101.4 AV			2.33 V	360	98.8	2.6
5	5350.00	59.4 PK	74.0	-14.6	2.33 V	360	56.8	2.6
6	5350.00	43.9 AV	54.0	-10.1	2.33 V	360	41.3	2.6
7	#10460.00	45.6 PK	68.2	-22.6	1.79 V	144	33.2	12.4
8	15690.00	55.0 PK	74.0	-19.0	1.34 V	67	42.6	12.4
9	15690.00	43.2 AV	54.0	-10.8	1.34 V	67	30.8	12.4
10	20920.00	-	-	-	-	-	-	-
11	#26150.00	-	-	-	-	-	-	-
12	31380.00	-	-	-	-	-	-	-
13	#36610.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

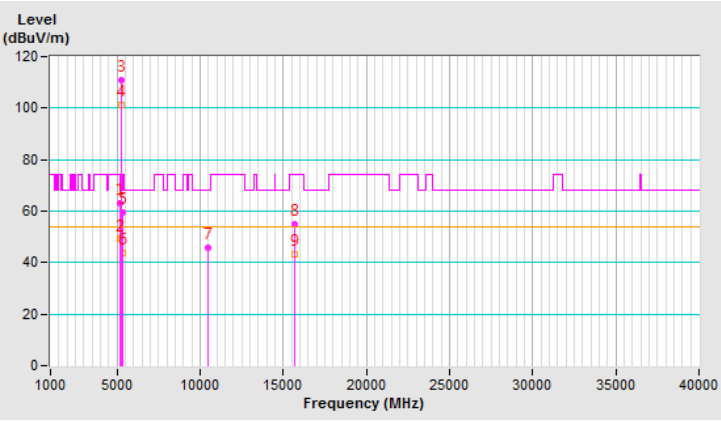


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 54：5.27 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=2kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	71%RH
測 試 日 期 ：	109 年 2 月 28 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	55.4 PK	74.0	-18.6	1.59 H	42	52.4	3.0
2	5150.00	44.2 AV	54.0	-9.8	1.59 H	42	41.2	3.0
3	*5270.00	118.9 PK			1.59 H	42	116.4	2.5
4	*5270.00	106.2 AV			1.59 H	42	103.7	2.5
5	5350.00	66.8 PK	74.0	-7.2	1.59 H	42	64.2	2.6
6	5350.00	51.5 AV	54.0	-2.5	1.59 H	42	48.9	2.6
7	#10540.00	42.7 PK	68.2	-25.5	3.56 H	198	30.1	12.6
8	15810.00	45.9 PK	74.0	-28.1	1.55 H	179	34.2	11.7
9	15810.00	34.8 AV	54.0	-19.2	1.55 H	179	23.1	11.7
10	21080.00	-	-	-	-	-	-	-
11	#26350.00	-	-	-	-	-	-	-
12	31620.00	-	-	-	-	-	-	-
13	#36890.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

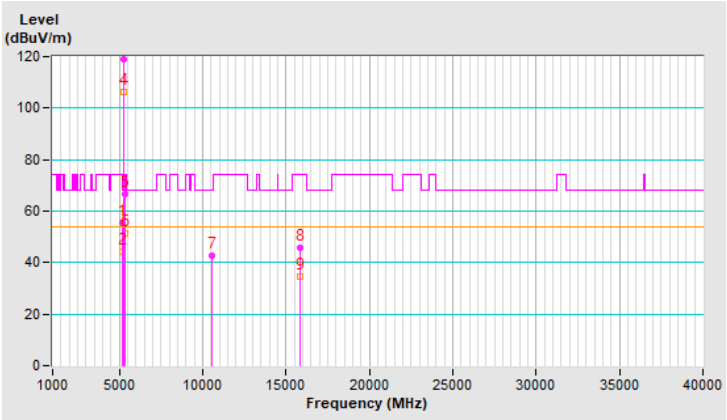


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 54：5.27 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=2kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	71%RH
測 試 日 期 ：	109 年 2 月 28 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	54.8 PK	74.0	-19.2	2.88 V	138	51.8	3.0
2	5150.00	43.7 AV	54.0	-10.3	2.88 V	138	40.7	3.0
3	*5270.00	116.4 PK			2.88 V	138	113.9	2.5
4	*5270.00	103.5 AV			2.88 V	138	101.0	2.5
5	5350.00	63.9 PK	74.0	-10.1	2.88 V	138	61.3	2.6
6	5350.00	48.6 AV	54.0	-5.4	2.88 V	138	46.0	2.6
7	#10540.00	42.9 PK	68.2	-25.3	3.20 V	184	30.3	12.6
8	15810.00	44.9 PK	74.0	-29.1	3.53 V	157	33.2	11.7
9	15810.00	34.5 AV	54.0	-19.5	3.53 V	157	22.8	11.7
10	21080.00	-	-	-	-	-	-	-
11	#26350.00	-	-	-	-	-	-	-
12	31620.00	-	-	-	-	-	-	-
13	#36890.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

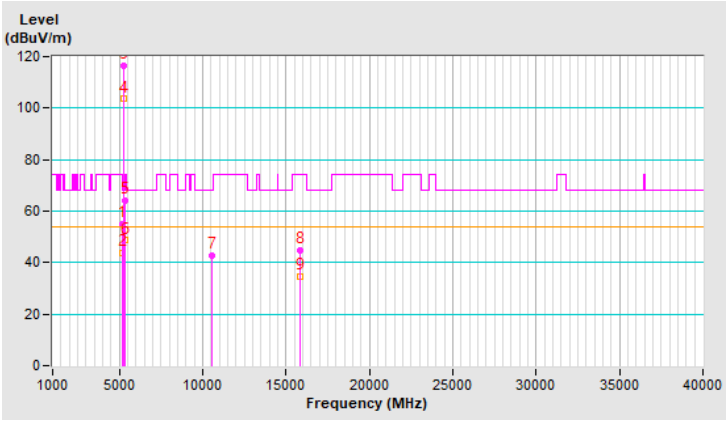


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 62：5.31 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=2kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	71%RH
測 試 日 期 ：	109 年 2 月 28 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5310.00	113.2 PK			1.63 H	55	110.8	2.4
2	*5310.00	101.8 AV			1.63 H	55	99.4	2.4
3	5350.00	70.7 PK	74.0	-3.3	1.63 H	55	68.1	2.6
4	5350.00	53.8 AV	54.0	-0.2	1.63 H	55	51.2	2.6
5	10620.00	43.6 PK	74.0	-30.4	3.59 H	207	31.2	12.4
6	10620.00	30.6 AV	54.0	-23.4	3.59 H	207	18.2	12.4
7	15930.00	45.9 PK	74.0	-28.1	1.55 H	196	33.7	12.2
8	15930.00	34.4 AV	54.0	-19.6	1.55 H	196	22.2	12.2
9	21240.00	-	-	-	-	-	-	-
10	#26550.00	-	-	-	-	-	-	-
11	#31860.00	-	-	-	-	-	-	-
12	#37170.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

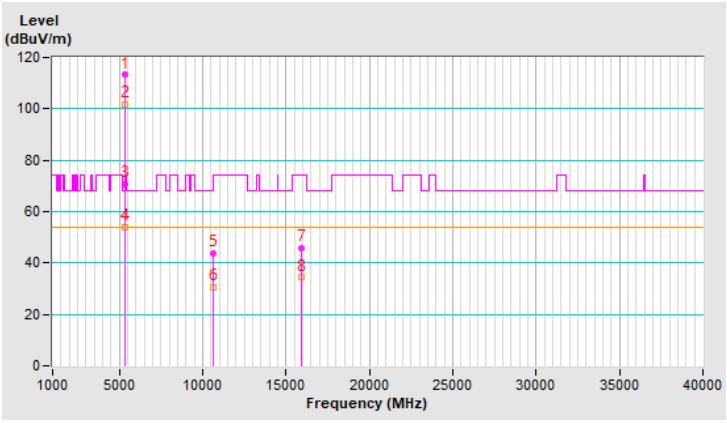


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 62：5.31 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=2kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	71%RH
測 試 日 期 ：	109 年 2 月 28 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5310.00	110.4 PK			2.85 V	150	108.0	2.4
2	*5310.00	99.0 AV			2.85 V	150	96.6	2.4
3	5350.00	67.6 PK	74.0	-6.4	2.85 V	150	65.0	2.6
4	5350.00	50.3 AV	54.0	-3.7	2.85 V	150	47.7	2.6
5	10620.00	43.3 PK	74.0	-30.7	3.14 V	168	30.9	12.4
6	10620.00	30.3 AV	54.0	-23.7	3.14 V	168	17.9	12.4
7	15930.00	45.7 PK	74.0	-28.3	3.52 V	159	33.5	12.2
8	15930.00	34.0 AV	54.0	-20.0	3.52 V	159	21.8	12.2
9	21240.00	-	-	-	-	-	-	-
10	#26550.00	-	-	-	-	-	-	-
11	#31860.00	-	-	-	-	-	-	-
12	#37170.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

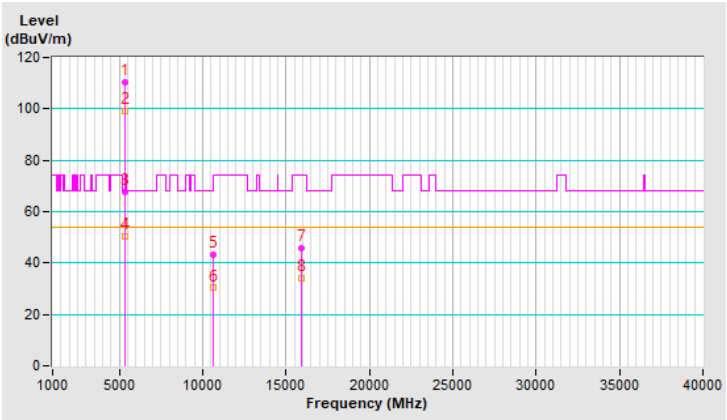


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 102：5.51 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=2kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	71%RH
測 試 日 期 ：	109 年 2 月 28 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	62.1 PK	74.0	-11.9	1.66 H	59	59.1	3.0
2	5460.00	44.7 AV	54.0	-9.3	1.66 H	59	41.7	3.0
3	#5470.00	68.0 PK	68.2	-0.2	1.66 H	59	64.9	3.1
4	*5510.00	112.3 PK			1.66 H	59	109.2	3.1
5	*5510.00	101.3 AV			1.66 H	59	98.2	3.1
6	11020.00	42.9 PK	74.0	-31.1	3.57 H	186	30.4	12.5
7	11020.00	29.8 AV	54.0	-24.2	3.57 H	186	17.3	12.5
8	#16530.00	46.0 PK	68.2	-22.2	1.64 H	204	32.1	13.9
9	22040.00	-	-	-	-	-	-	-
10	#27550.00	-	-	-	-	-	-	-
11	#33060.00	-	-	-	-	-	-	-
12	#38570.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

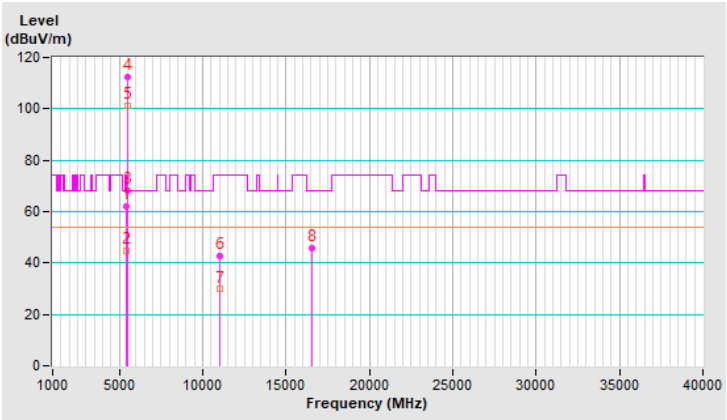


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 102：5.51 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=2kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	71%RH
測 試 日 期 ：	109 年 2 月 28 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	61.7 PK	74.0	-12.3	2.83 V	131	58.7	3.0
2	5460.00	44.1 AV	54.0	-9.9	2.83 V	131	41.1	3.0
3	#5470.00	65.8 PK	68.2	-2.4	2.83 V	131	62.7	3.1
4	*5510.00	110.5 PK			2.83 V	131	107.4	3.1
5	*5510.00	99.0 AV			2.83 V	131	95.9	3.1
6	11020.00	43.1 PK	74.0	-30.9	3.17 V	173	30.6	12.5
7	11020.00	29.9 AV	54.0	-24.1	3.17 V	173	17.4	12.5
8	#16530.00	45.4 PK	68.2	-22.8	3.52 V	177	31.5	13.9
9	22040.00	-	-	-	-	-	-	-
10	#27550.00	-	-	-	-	-	-	-
11	#33060.00	-	-	-	-	-	-	-
12	#38570.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

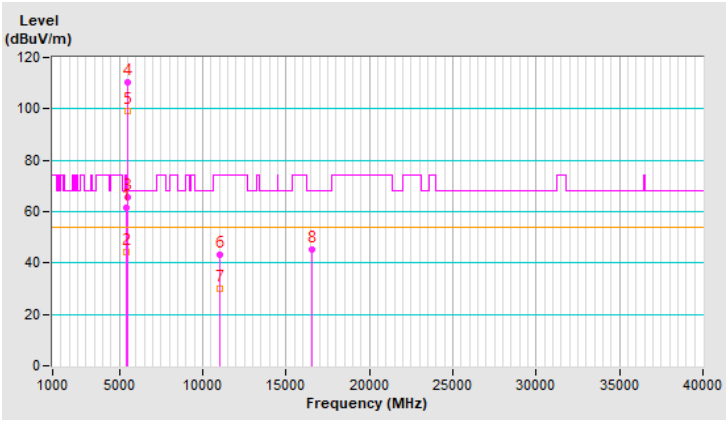


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 110：5.55 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=2kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	71%RH
測 試 日 期 ：	109 年 2 月 28 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5550.00	118.8 PK			1.63 H	61	115.8	3.0
2	*5550.00	106.1 AV			1.63 H	61	103.1	3.0
3	11100.00	43.5 PK	74.0	-30.5	3.57 H	208	31.2	12.3
4	11100.00	30.4 AV	54.0	-23.6	3.57 H	208	18.1	12.3
5	#16650.00	42.6 PK	68.2	-25.6	1.58 H	190	28.0	14.6
6	22200.00	-	-	-	-	-	-	-
7	#27750.00	-	-	-	-	-	-	-
8	#33300.00	-	-	-	-	-	-	-
9	38850.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

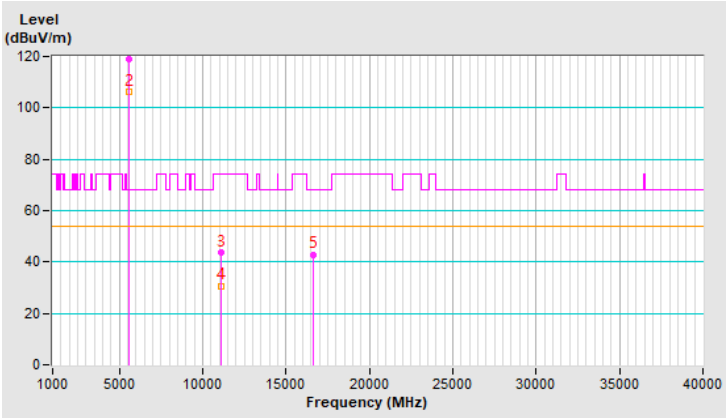


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 110：5.55 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=2kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	71%RH
測 試 日 期 ：	109 年 2 月 28 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5550.00	116.4 PK			2.89 V	150	113.4	3.0
2	*5550.00	103.4 AV			2.89 V	150	100.4	3.0
3	11100.00	43.6 PK	74.0	-30.4	3.21 V	188	31.3	12.3
4	11100.00	30.2 AV	54.0	-23.8	3.21 V	188	17.9	12.3
5	#16650.00	45.5 PK	68.2	-22.7	3.58 V	152	30.9	14.6
6	22200.00	-	-	-	-	-	-	-
7	#27750.00	-	-	-	-	-	-	-
8	#33300.00	-	-	-	-	-	-	-
9	38850.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

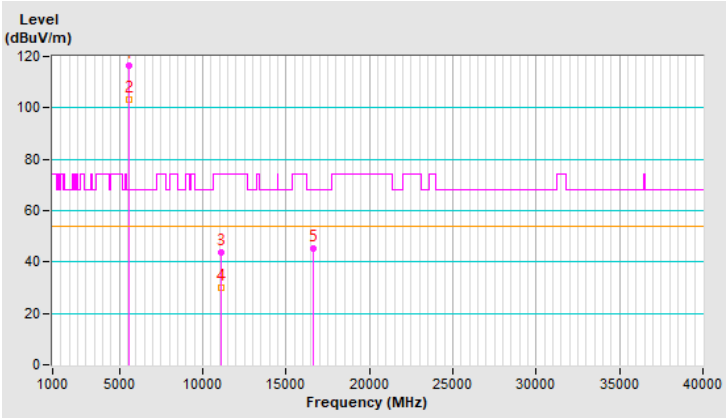


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 134：5.67 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=2kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	71%RH
測 試 日 期 ：	109 年 2 月 28 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5670.00	115.2 PK			1.55 H	64	112.0	3.2
2	*5670.00	103.6 AV			1.55 H	64	100.4	3.2
3	#5725.00	68.1 PK	68.2	-0.1	1.55 H	64	64.8	3.3
4	11340.00	43.1 PK	74.0	-30.9	3.55 H	180	30.2	12.9
5	11340.00	30.3 AV	54.0	-23.7	3.55 H	180	17.4	12.9
6	#17010.00	46.1 PK	68.2	-22.1	1.56 H	208	30.2	15.9
7	22680.00	-	-	-	-	-	-	-
8	#28350.00	-	-	-	-	-	-	-
9	#34020.00	-	-	-	-	-	-	-
10	39690.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

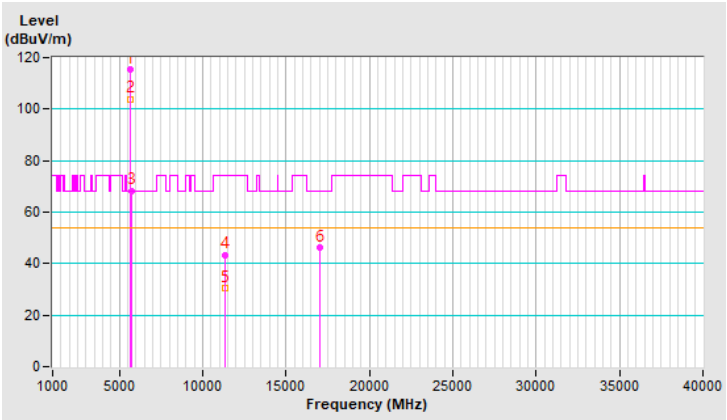


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 134：5.67 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=2kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	71%RH
測 試 日 期 ：	109 年 2 月 28 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5670.00	112.6 PK			2.92 V	146	109.4	3.2
2	*5670.00	100.9 AV			2.92 V	146	97.7	3.2
3	#5725.00	66.9 PK	68.2	-1.3	2.92 V	146	63.6	3.3
4	11340.00	43.1 PK	74.0	-30.9	3.15 V	190	30.2	12.9
5	11340.00	29.9 AV	54.0	-24.1	3.15 V	190	17.0	12.9
6	#17010.00	45.2 PK	68.2	-23.0	3.50 V	160	29.3	15.9
7	22680.00	-	-	-	-	-	-	-
8	#28350.00	-	-	-	-	-	-	-
9	#34020.00	-	-	-	-	-	-	-
10	39690.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

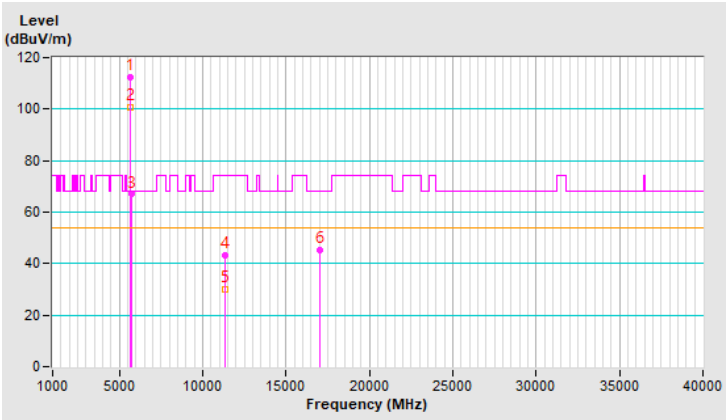


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 142 : 5.71 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=2kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	71%RH
測 試 日 期 ：	109 年 2 月 28 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	54.5 PK	74.0	-19.5	1.53 H	58	51.5	3.0
2	5460.00	41.5 AV	54.0	-12.5	1.53 H	58	38.5	3.0
3	#5470.00	55.4 PK	68.2	-12.8	1.53 H	58	52.3	3.1
4	*5710.00	118.3 PK			1.53 H	58	115.1	3.2
5	*5710.00	105.9 AV			1.53 H	58	102.7	3.2
6	#5850.00	53.3 PK	68.2	-14.9	1.53 H	58	49.6	3.7
7	11420.00	43.3 PK	74.0	-30.7	3.60 H	186	30.4	12.9
8	11420.00	30.3 AV	54.0	-23.7	3.60 H	186	17.4	12.9
9	#17130.00	45.3 PK	68.2	-22.9	1.57 H	197	28.9	16.4
10	22840.00	-	-	-	-	-	-	-
11	#28550.00	-	-	-	-	-	-	-
12	#34260.00	-	-	-	-	-	-	-
13	39970.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

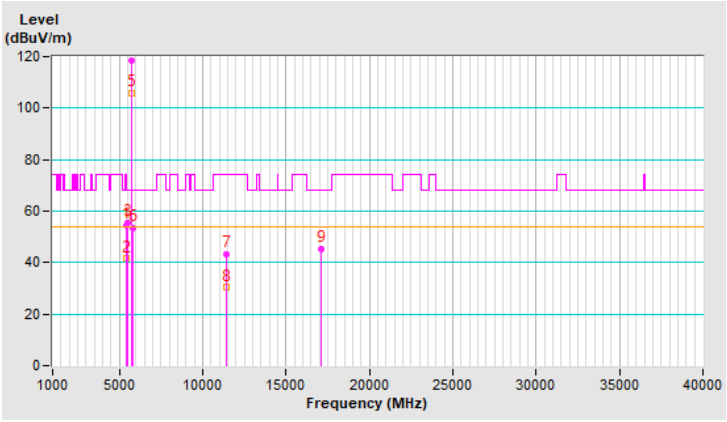


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 142：5.71 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=2kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	71%RH
測 試 日 期 ：	109 年 2 月 28 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	54.3 PK	74.0	-19.7	2.87 V	146	51.3	3.0
2	5460.00	41.1 AV	54.0	-12.9	2.87 V	146	38.1	3.0
3	#5470.00	55.0 PK	68.2	-13.2	2.87 V	146	51.9	3.1
4	*5710.00	116.1 PK			2.87 V	146	112.9	3.2
5	*5710.00	103.2 AV			2.87 V	146	100.0	3.2
6	#5850.00	53.0 PK	68.2	-15.2	2.87 V	146	49.3	3.7
7	11420.00	44.0 PK	74.0	-30.0	3.14 V	182	31.1	12.9
8	11420.00	30.7 AV	54.0	-23.3	3.14 V	182	17.8	12.9
9	#17130.00	45.5 PK	68.2	-22.7	3.51 V	169	29.1	16.4
10	22840.00	-	-	-	-	-	-	-
11	#28550.00	-	-	-	-	-	-	-
12	#34260.00	-	-	-	-	-	-	-
13	39970.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

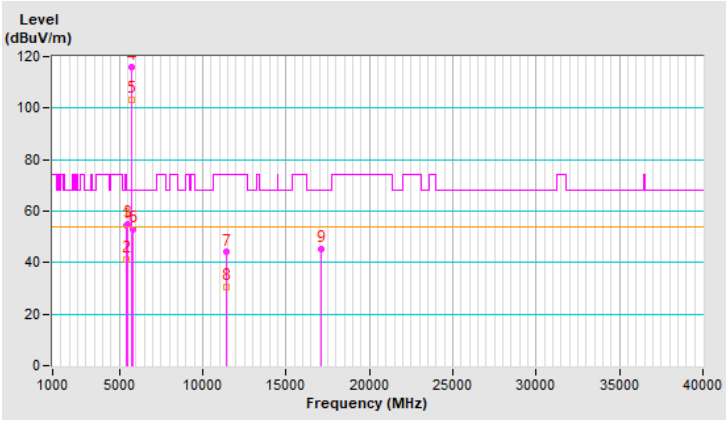


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 151：5.755 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=2kHz
量 測 場 地 溫 度 ：	23℃	量 測 場 地 濕 度 ：	67%RH
測 試 日 期 ：	109 年 1 月 22 日	測 試 者 ：	柯其宗

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5755.00	121.1 PK			1.65 H	70	117.8	3.3
2	*5755.00	108.8 AV			1.65 H	70	105.5	3.3
3	11510.00	51.8 PK	74.0	-22.2	2.72 H	258	39.3	12.5
4	11510.00	40.9 AV	54.0	-13.1	2.72 H	258	28.4	12.5
5	#17265.00	61.3 PK	68.2	-6.9	2.47 H	62	44.7	16.6
6	23020.00	-	-	-	-	-	-	-
7	#28775.00	-	-	-	-	-	-	-
8	#34530.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

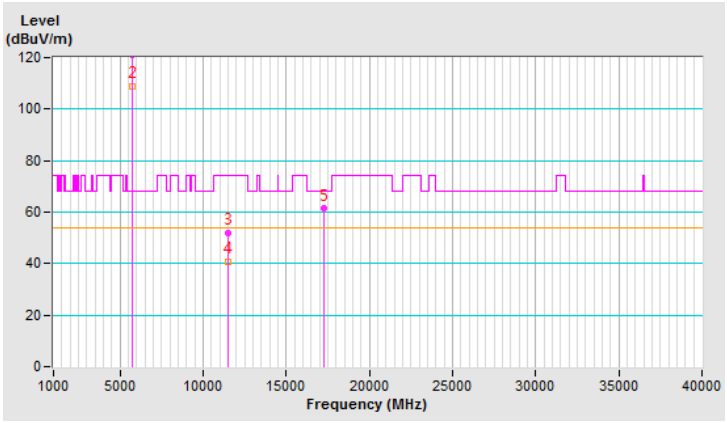


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 151：5.755 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=2kHz
量 測 場 地 溫 度 ：	23℃	量 測 場 地 濕 度 ：	67%RH
測 試 日 期 ：	109 年 1 月 22 日	測 試 者 ：	柯其宗

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5755.00	117.6 PK			3.86 V	354	114.3	3.3
2	*5755.00	106.4 AV			3.86 V	354	103.1	3.3
3	11510.00	52.1 PK	74.0	-21.9	1.97 V	172	39.6	12.5
4	11510.00	40.6 AV	54.0	-13.4	1.97 V	172	28.1	12.5
5	#17265.00	64.7 PK	68.2	-3.5	1.12 V	69	48.1	16.6
6	23020.00	-	-	-	-	-	-	-
7	#28775.00	-	-	-	-	-	-	-
8	#34530.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

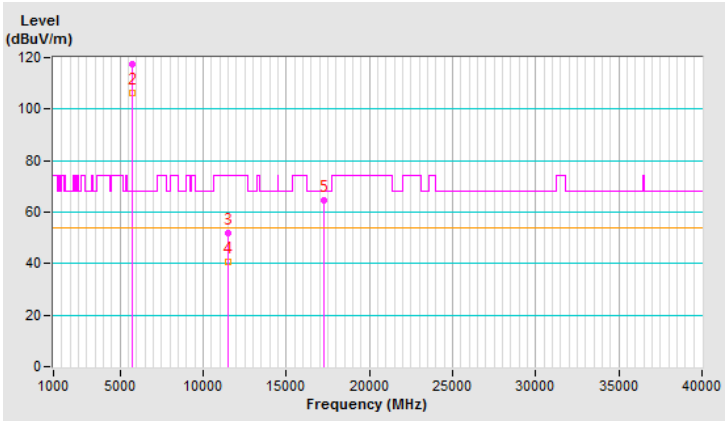


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 159：5.795 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=2kHz
量 測 場 地 溫 度 ：	23℃	量 測 場 地 濕 度 ：	67%RH
測 試 日 期 ：	109 年 1 月 22 日	測 試 者 ：	柯其宗

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5795.00	121.1 PK			1.62 H	57	117.6	3.5
2	*5795.00	109.0 AV			1.62 H	57	105.5	3.5
3	11590.00	52.0 PK	74.0	-22.0	2.69 H	253	39.7	12.3
4	11590.00	41.3 AV	54.0	-12.7	2.69 H	253	29.0	12.3
5	#17385.00	60.9 PK	68.2	-7.3	2.52 H	79	44.4	16.5
6	#23180.00	-	-	-	-	-	-	-
7	#28975.00	-	-	-	-	-	-	-
8	#34770.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

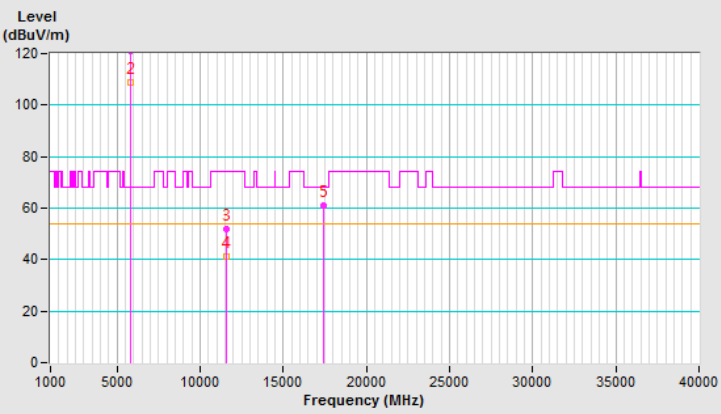


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 159：5.795 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=2kHz
量 測 場 地 溫 度 ：	23℃	量 測 場 地 濕 度 ：	67%RH
測 試 日 期 ：	109 年 1 月 22 日	測 試 者 ：	柯其宗

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5795.00	118.5 PK			3.95 V	356	115.0	3.5
2	*5795.00	107.1 AV			3.95 V	356	103.6	3.5
3	11590.00	53.6 PK	74.0	-20.4	1.91 V	166	41.3	12.3
4	11590.00	41.1 AV	54.0	-12.9	1.91 V	166	28.8	12.3
5	#17385.00	65.6 PK	68.2	-2.6	1.11 V	59	49.1	16.5
6	#23180.00	-	-	-	-	-	-	-
7	#28975.00	-	-	-	-	-	-	-
8	#34770.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

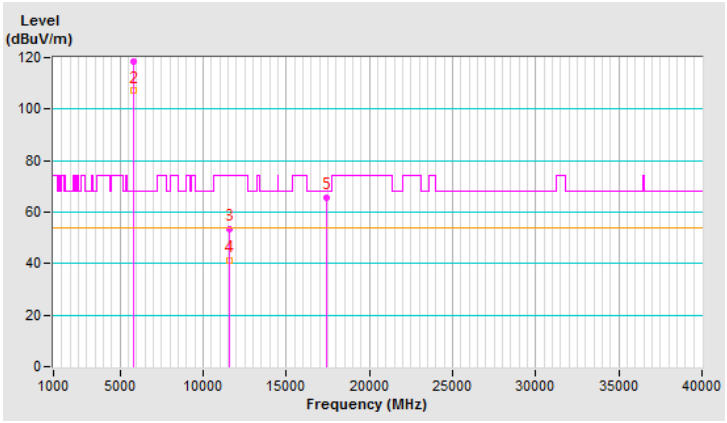


802.11ax (HE80)

操作模式：	發射	調變技術：	OFDMA
基本波頻率：	CH 42：5.21 GHz	測試儀器：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=3kHz
量測場地溫度：	23℃	量測場地濕度：	67%RH
測試日期：	109 年 1 月 22 日	測試者：	柯其宗

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	65.7 PK	74.0	-8.3	3.34 H	70	62.7	3.0
2	5150.00	53.6 AV	54.0	-0.4	3.34 H	70	50.6	3.0
3	*5210.00	108.7 PK			3.34 H	70	106.0	2.7
4	*5210.00	97.4 AV			3.34 H	70	94.7	2.7
5	5350.00	52.6 PK	74.0	-21.4	3.34 H	70	50.0	2.6
6	5350.00	40.2 AV	54.0	-13.8	3.34 H	70	37.6	2.6
7	#10420.00	45.2 PK	68.2	-23.0	2.77 H	267	32.9	12.3
8	15630.00	50.2 PK	74.0	-23.8	2.47 H	86	37.5	12.7
9	15630.00	38.2 AV	54.0	-15.8	2.47 H	86	25.5	12.7
10	20840.00	-	-	-	-	-	-	-
11	#26050.00	-	-	-	-	-	-	-
12	31260.00	-	-	-	-	-	-	-
13	36470.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

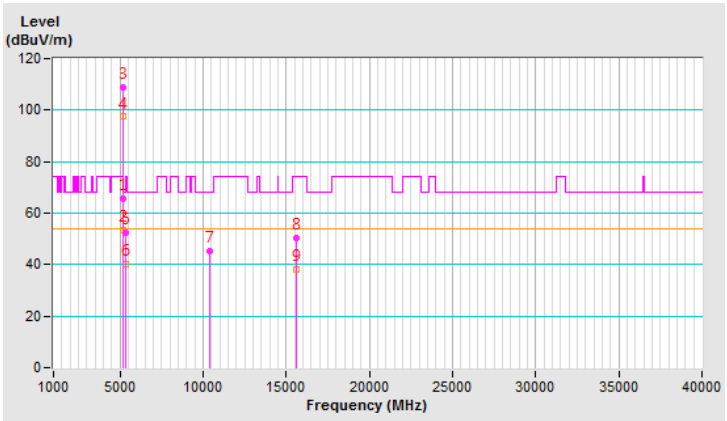


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 42：5.21 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=3kHz
量 測 場 地 溫 度 ：	23℃	量 測 場 地 濕 度 ：	67%RH
測 試 日 期 ：	109 年 1 月 22 日	測 試 者 ：	柯其宗

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	62.8 PK	74.0	-11.2	2.33 V	360	59.8	3.0
2	5150.00	49.4 AV	54.0	-4.6	2.33 V	360	46.4	3.0
3	*5210.00	106.1 PK			2.33 V	360	103.4	2.7
4	*5210.00	93.6 AV			2.33 V	360	90.9	2.7
5	5350.00	52.2 PK	74.0	-21.8	2.33 V	360	49.6	2.6
6	5350.00	40.1 AV	54.0	-13.9	2.33 V	360	37.5	2.6
7	#10420.00	44.1 PK	68.2	-24.1	1.75 V	144	31.8	12.3
8	15630.00	53.1 PK	74.0	-20.9	1.39 V	57	40.4	12.7
9	15630.00	42.6 AV	54.0	-11.4	1.39 V	57	29.9	12.7
10	20840.00	-	-	-	-	-	-	-
11	#26050.00	-	-	-	-	-	-	-
12	31260.00	-	-	-	-	-	-	-
13	36470.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

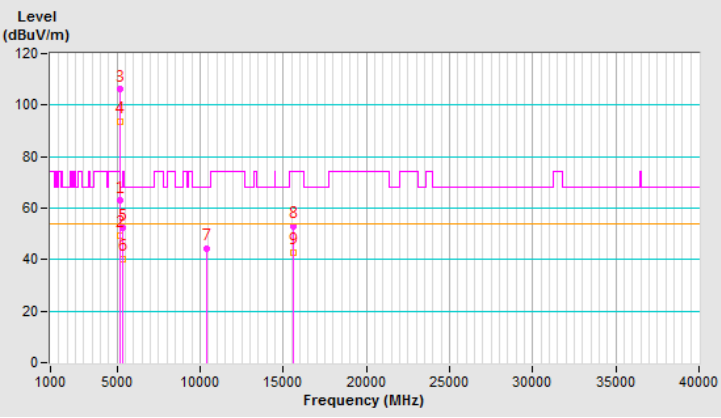


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 58：5.29 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=3kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	71%RH
測 試 日 期 ：	109 年 2 月 28 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	54.7 PK	74.0	-19.3	1.69 H	69	51.7	3.0
2	5150.00	42.9 AV	54.0	-11.1	1.69 H	69	39.9	3.0
3	*5290.00	111.7 PK			1.69 H	69	109.3	2.4
4	*5290.00	99.0 AV			1.69 H	69	96.6	2.4
5	5350.00	67.4 PK	74.0	-6.6	1.69 H	69	64.8	2.6
6	5350.00	53.9 AV	54.0	-0.1	1.69 H	69	51.3	2.6
7	#10580.00	43.0 PK	68.2	-25.2	3.63 H	187	30.5	12.5
8	15870.00	45.6 PK	74.0	-28.4	1.55 H	209	33.7	11.9
9	15870.00	34.9 AV	54.0	-19.1	1.55 H	209	23.0	11.9
10	21160.00	-	-	-	-	-	-	-
11	#26450.00	-	-	-	-	-	-	-
12	31740.00	-	-	-	-	-	-	-
13	#37030.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

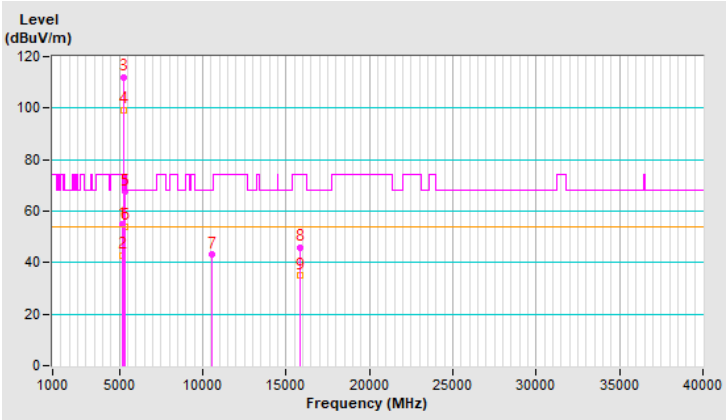


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 58：5.29 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=3kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	71%RH
測 試 日 期 ：	109 年 2 月 28 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	54.3 PK	74.0	-19.7	2.85 V	152	51.3	3.0
2	5150.00	42.2 AV	54.0	-11.8	2.85 V	152	39.2	3.0
3	*5290.00	108.5 PK			2.85 V	152	106.1	2.4
4	*5290.00	95.7 AV			2.85 V	152	93.3	2.4
5	5350.00	64.5 PK	74.0	-9.5	2.85 V	152	61.9	2.6
6	5350.00	50.6 AV	54.0	-3.4	2.85 V	152	48.0	2.6
7	#10580.00	43.5 PK	68.2	-24.7	3.18 V	179	31.0	12.5
8	15870.00	45.7 PK	74.0	-28.3	3.55 V	171	33.8	11.9
9	15870.00	34.4 AV	54.0	-19.6	3.55 V	171	22.5	11.9
10	21160.00	-	-	-	-	-	-	-
11	#26450.00	-	-	-	-	-	-	-
12	31740.00	-	-	-	-	-	-	-
13	#37030.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

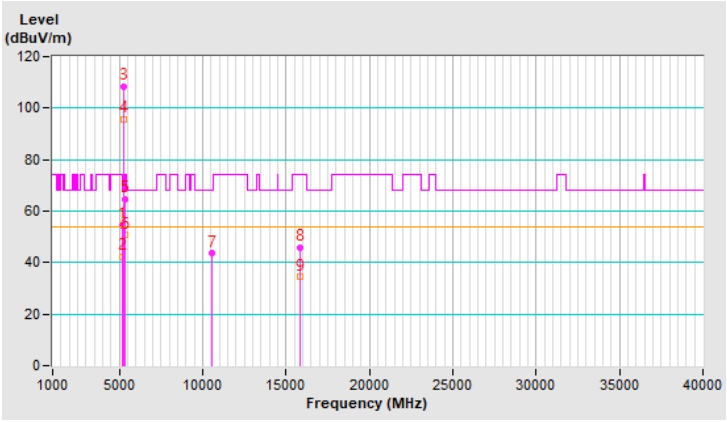


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 106：5.53 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=3kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	71%RH
測 試 日 期 ：	109 年 2 月 28 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	64.6 PK	74.0	-9.4	1.58 H	63	61.6	3.0
2	5460.00	49.6 AV	54.0	-4.4	1.58 H	63	46.6	3.0
3	#5470.00	67.8 PK	68.2	-0.4	1.58 H	63	64.7	3.1
4	*5530.00	111.7 PK			1.58 H	63	108.7	3.0
5	*5530.00	99.1 AV			1.58 H	63	96.1	3.0
6	#5725.00	53.7 PK	68.2	-14.5	1.58 H	63	50.4	3.3
7	11060.00	43.0 PK	74.0	-31.0	3.56 H	181	30.6	12.4
8	11060.00	30.2 AV	54.0	-23.8	3.56 H	181	17.8	12.4
9	#16590.00	45.1 PK	68.2	-23.1	1.66 H	196	30.7	14.4
10	22120.00	-	-	-	-	-	-	-
11	#27650.00	-	-	-	-	-	-	-
12	#33180.00	-	-	-	-	-	-	-
13	38710.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

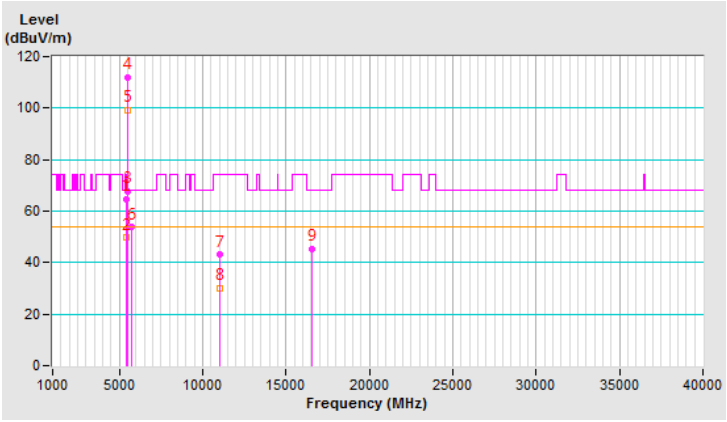


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 106：5.53 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=3kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	71%RH
測 試 日 期 ：	109 年 2 月 28 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	63.2 PK	74.0	-10.8	2.86 V	142	60.2	3.0
2	5460.00	48.1 AV	54.0	-5.9	2.86 V	142	45.1	3.0
3	#5470.00	65.5 PK	68.2	-2.7	2.86 V	142	62.4	3.1
4	*5530.00	109.1 PK			2.86 V	142	106.1	3.0
5	*5530.00	96.0 AV			2.86 V	142	93.0	3.0
6	#5725.00	55.5 PK	68.2	-12.7	2.86 V	142	52.2	3.3
7	11060.00	43.1 PK	74.0	-30.9	3.10 V	191	30.7	12.4
8	11060.00	30.0 AV	54.0	-24.0	3.10 V	191	17.6	12.4
9	#16590.00	45.7 PK	68.2	-22.5	3.51 V	150	31.3	14.4
10	22120.00	-	-	-	-	-	-	-
11	#27650.00	-	-	-	-	-	-	-
12	#33180.00	-	-	-	-	-	-	-
13	38710.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

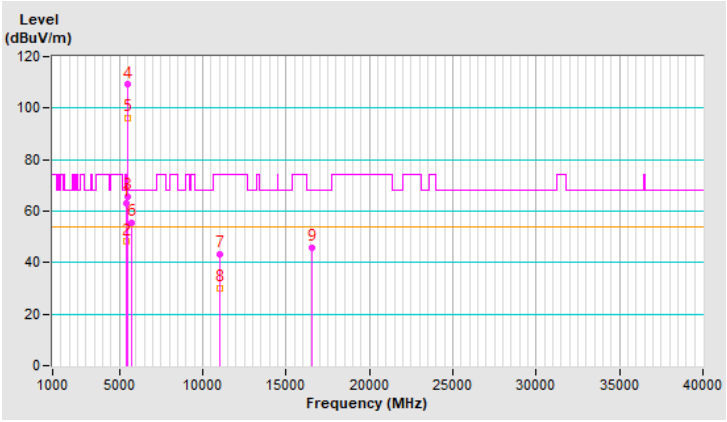


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 122：5.61 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=3kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	71%RH
測 試 日 期 ：	109 年 2 月 28 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5610.00	113.9 PK			1.57 H	64	110.9	3.0
2	*5610.00	101.8 AV			1.57 H	64	98.8	3.0
3	#5725.00	67.8 PK	68.2	-0.4	1.57 H	64	64.5	3.3
4	11220.00	43.3 PK	74.0	-30.7	3.57 H	174	30.8	12.5
5	11220.00	30.5 AV	54.0	-23.5	3.57 H	174	18.0	12.5
6	#16830.00	44.9 PK	68.2	-23.3	1.61 H	200	30.0	14.9
7	22440.00	-	-	-	-	-	-	-
8	#28050.00	-	-	-	-	-	-	-
9	#33660.00	-	-	-	-	-	-	-
10	39270.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

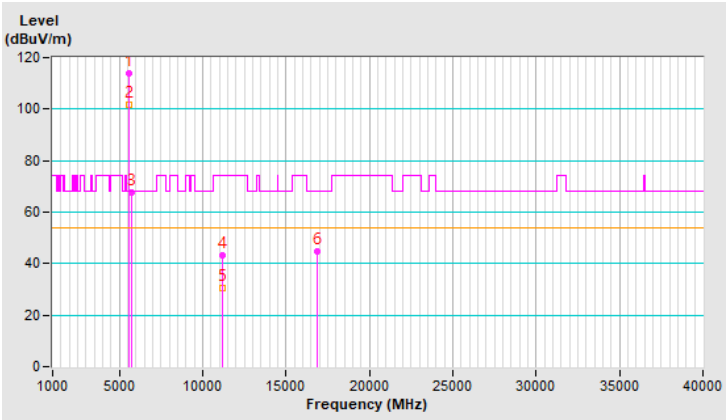


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 122：5.61 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=3kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	71%RH
測 試 日 期 ：	109 年 2 月 28 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5610.00	111.3 PK			2.93 V	148	108.3	3.0
2	*5610.00	98.5 AV			2.93 V	148	95.5	3.0
3	#5725.00	66.4 PK	68.2	-1.8	2.93 V	148	63.1	3.3
4	11220.00	43.5 PK	74.0	-30.5	3.18 V	196	31.0	12.5
5	11220.00	30.4 AV	54.0	-23.6	3.18 V	196	17.9	12.5
6	#16830.00	45.4 PK	68.2	-22.8	3.58 V	176	30.5	14.9
7	22440.00	-	-	-	-	-	-	-
8	#28050.00	-	-	-	-	-	-	-
9	#33660.00	-	-	-	-	-	-	-
10	39270.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

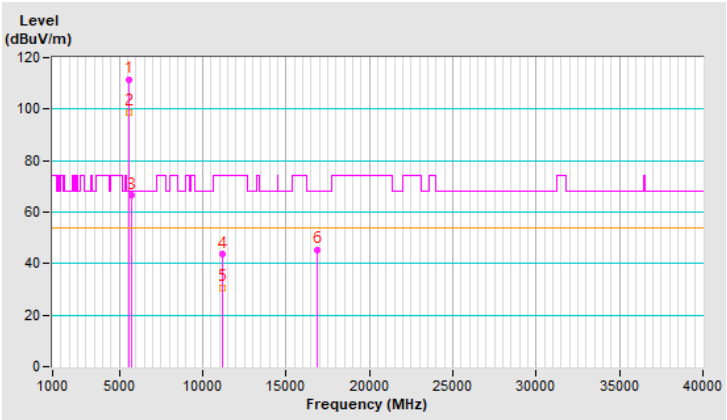


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 138：5.69 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=3kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	71%RH
測 試 日 期 ：	109 年 2 月 28 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	56.3 PK	74.0	-17.7	1.54 H	61	53.3	3.0
2	5460.00	43.6 AV	54.0	-10.4	1.54 H	61	40.6	3.0
3	#5470.00	57.6 PK	68.2	-10.6	1.54 H	61	54.5	3.1
4	*5690.00	116.8 PK			1.54 H	61	113.6	3.2
5	*5690.00	104.5 AV			1.54 H	61	101.3	3.2
6	#5850.00	65.4 PK	68.2	-2.8	1.54 H	61	61.7	3.7
7	11380.00	42.8 PK	74.0	-31.2	3.56 H	179	29.9	12.9
8	11380.00	30.1 AV	54.0	-23.9	3.56 H	179	17.2	12.9
9	#17070.00	44.8 PK	68.2	-23.4	1.63 H	199	28.7	16.1
10	22760.00	-	-	-	-	-	-	-
11	#28450.00	-	-	-	-	-	-	-
12	#34140.00	-	-	-	-	-	-	-
13	39830.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

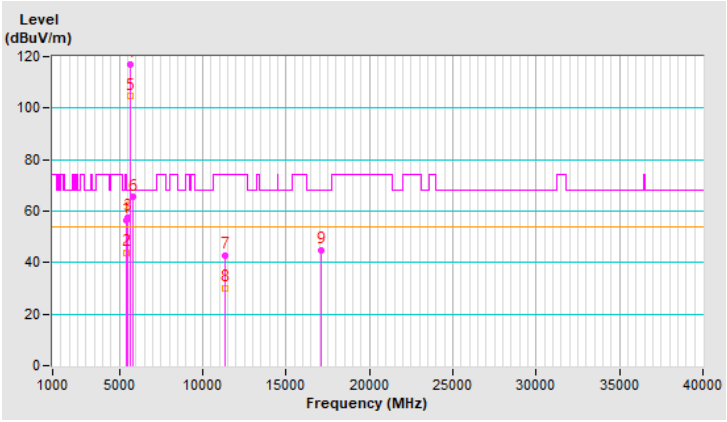


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 138：5.69 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=3kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	71%RH
測 試 日 期 ：	109 年 2 月 28 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	55.5 PK	74.0	-18.5	2.86 V	137	52.5	3.0
2	5460.00	42.4 AV	54.0	-11.6	2.86 V	137	39.4	3.0
3	#5470.00	56.9 PK	68.2	-11.3	2.86 V	137	53.8	3.1
4	*5690.00	113.7 PK			2.86 V	137	110.5	3.2
5	*5690.00	101.2 AV			2.86 V	137	98.0	3.2
6	#5850.00	62.7 PK	68.2	-5.5	2.86 V	137	59.0	3.7
7	11380.00	43.1 PK	74.0	-30.9	3.10 V	169	30.2	12.9
8	11380.00	30.1 AV	54.0	-23.9	3.10 V	169	17.2	12.9
9	#17070.00	45.6 PK	68.2	-22.6	3.50 V	152	29.5	16.1
10	22760.00	-	-	-	-	-	-	-
11	#28450.00	-	-	-	-	-	-	-
12	#34140.00	-	-	-	-	-	-	-
13	39830.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

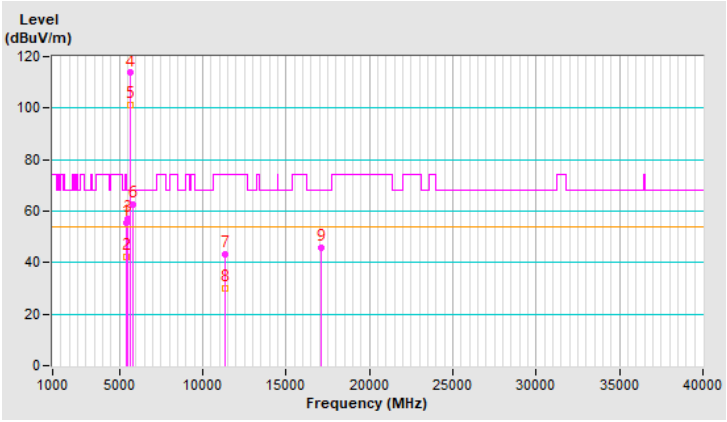


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 155：5.775 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=3kHz
量 測 場 地 溫 度 ：	23℃	量 測 場 地 濕 度 ：	67%RH
測 試 日 期 ：	109 年 1 月 22 日	測 試 者 ：	柯其宗

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5775.00	114.4 PK			1.64 H	53	111.0	3.4
2	*5775.00	102.2 AV			1.64 H	53	98.8	3.4
3	11550.00	44.5 PK	74.0	-29.5	2.73 H	279	32.1	12.4
4	11550.00	35.0 AV	54.0	-19.0	2.73 H	279	22.6	12.4
5	#17325.00	50.1 PK	68.2	-18.1	2.50 H	70	33.4	16.7
6	23100.00	-	-	-	-	-	-	-
7	#28875.00	-	-	-	-	-	-	-
8	#34650.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

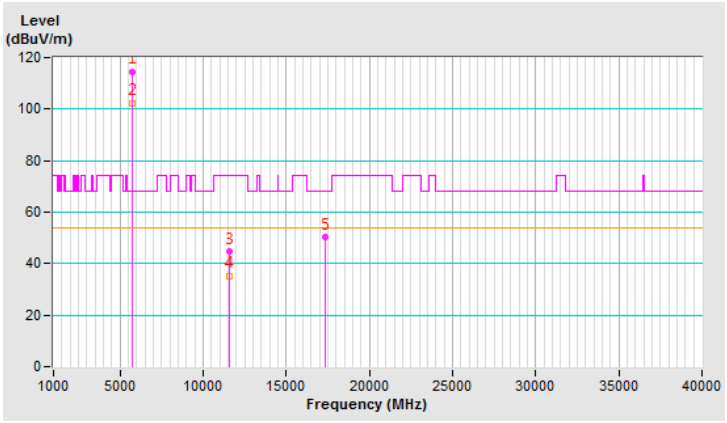


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 155：5.775 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=3kHz
量 測 場 地 溫 度 ：	23℃	量 測 場 地 濕 度 ：	67%RH
測 試 日 期 ：	109 年 1 月 22 日	測 試 者 ：	柯其宗

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5775.00	111.7 PK			3.96 V	353	108.3	3.4
2	*5775.00	99.9 AV			3.96 V	353	96.5	3.4
3	11550.00	43.8 PK	74.0	-30.2	1.83 V	156	31.4	12.4
4	11550.00	35.5 AV	54.0	-18.5	1.83 V	156	23.1	12.4
5	#17325.00	53.3 PK	68.2	-14.9	1.31 V	82	36.6	16.7
6	23100.00	-	-	-	-	-	-	-
7	#28875.00	-	-	-	-	-	-	-
8	#34650.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

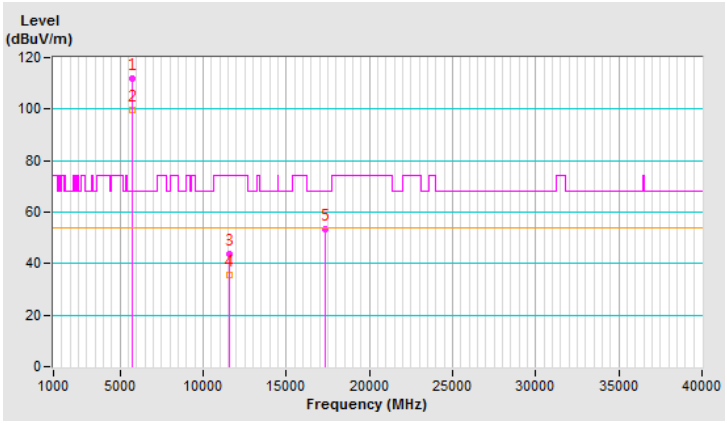


4.7.2 接收諧波

操 作 模 式 ：	接收		
基 本 波 頻 率 ：	CH 149：5.745 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=3MHz
量 測 場 地 溫 度 ：	23℃	量 測 場 地 濕 度 ：	67%RH
測 試 日 期 ：	109 年 1 月 22 日	測 試 者 ：	柯其宗

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3856.67	36.1 PK	74.0	-37.9	1.59 H	293	36.0	0.1
2	3856.67	30.2 AV	54.0	-23.8	1.59 H	293	30.1	0.1
3	7713.33	44.9 PK	74.0	-29.1	2.67 H	256	37.0	7.9
4	7713.33	33.7 AV	54.0	-20.3	2.67 H	256	25.8	7.9
5	11570.00	53.3 PK	74.0	-20.7	2.84 H	267	41.1	12.2
6	11570.00	41.1 AV	54.0	-12.9	2.84 H	267	28.9	12.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

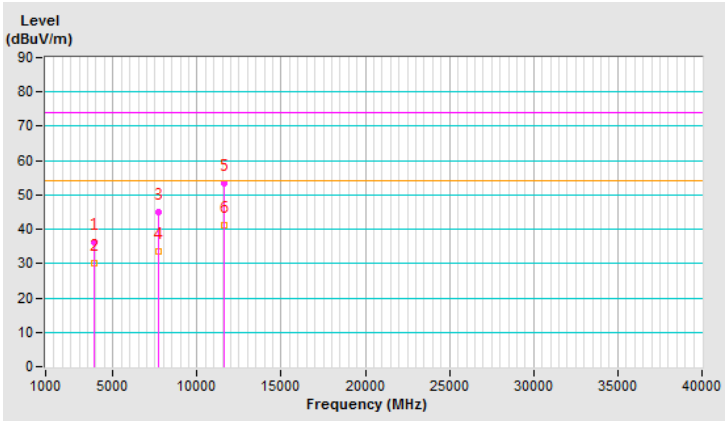


操 作 模 式 ：	接收		
基 本 波 頻 率 ：	CH 149：5.745 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=3MHz
量 測 場 地 溫 度 ：	23℃	量 測 場 地 濕 度 ：	67%RH
測 試 日 期 ：	109 年 1 月 22 日	測 試 者 ：	柯其宗

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3856.67	36.4 PK	74.0	-37.6	2.30 V	360	36.3	0.1
2	3856.67	30.4 AV	54.0	-23.6	2.30 V	360	30.3	0.1
3	7713.33	45.1 PK	74.0	-28.9	1.90 V	133	37.2	7.9
4	7713.33	34.1 AV	54.0	-19.9	1.90 V	133	26.2	7.9
5	11570.00	53.6 PK	74.0	-20.4	1.34 V	78	41.4	12.2
6	11570.00	41.1 AV	54.0	-12.9	1.34 V	78	28.9	12.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

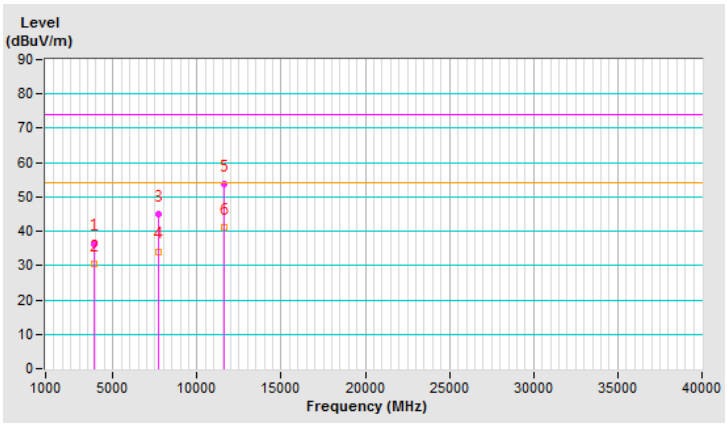

4.7.3 其它不必要之訊號


802.11ax (HE40)

操 作 模 式 ：	發射接收	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 159：5.795 GHz	測 試 儀 器 ：	(QP) RB=120kHz
量測場地溫度：	22℃	量測場地濕度：	68%RH
測 試 日 期 ：	109 年 1 月 17 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	37.18	36.1 QP	40.0	-3.9	3.00 H	104	44.5	-8.4
2	78.79	33.9 QP	40.0	-6.1	2.00 H	129	46.3	-12.4
3	125.04	29.3 QP	43.5	-14.2	1.00 H	0	38.2	-8.9
4	197.54	30.5 QP	43.5	-13.0	2.00 H	105	40.8	-10.3
5	250.00	26.7 QP	46.0	-19.3	2.00 H	306	35.1	-8.4
6	323.81	36.8 QP	46.0	-9.2	1.00 H	320	42.3	-5.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30MHz~1000MHz.
5. The emission levels were very low against the limit of frequency range 9kHz~30MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

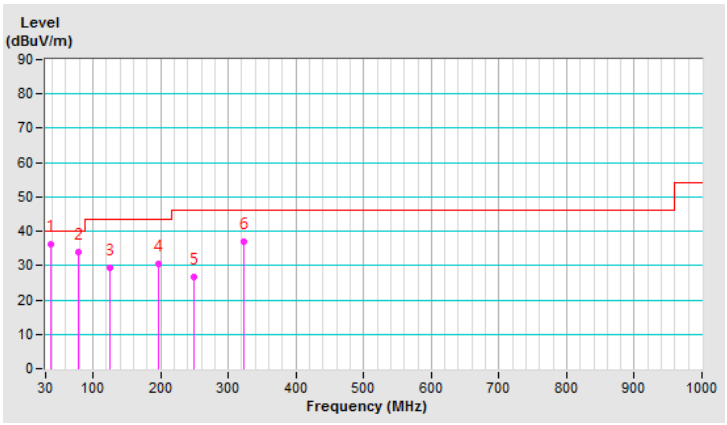


操 作 模 式 ：	發射接收	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 159：5.795 GHz	測 試 儀 器 ：	(QP) RB=120kHz
量 測 場 地 溫 度 ：	22℃	量 測 場 地 濕 度 ：	68%RH
測 試 日 期 ：	109 年 1 月 17 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	39.48	36.2 QP	40.0	-3.8	1.01 V	247	44.4	-8.2
2	68.19	37.0 QP	40.0	-3.0	1.00 V	78	46.9	-9.9
3	148.66	28.9 QP	43.5	-14.6	1.00 V	360	36.0	-7.1
4	226.79	25.7 QP	46.0	-20.3	1.00 V	57	35.4	-9.7
5	290.11	25.6 QP	46.0	-20.4	1.50 V	174	32.3	-6.7
6	322.19	34.2 QP	46.0	-11.8	2.00 V	88	39.7	-5.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30MHz~1000MHz.
5. The emission levels were very low against the limit of frequency range 9kHz~30MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

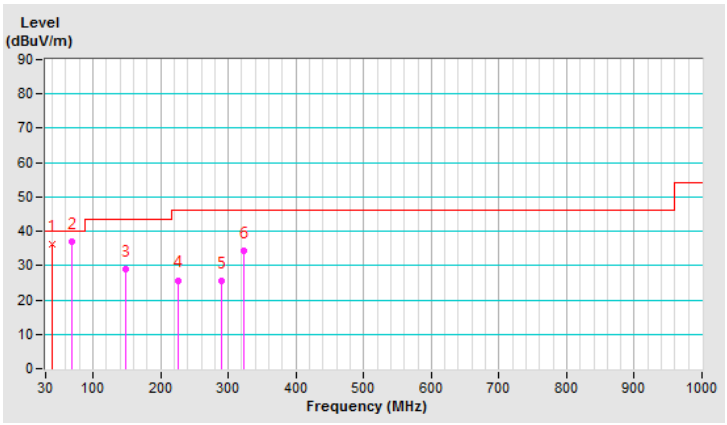

4.8 量測結果 (模式 3)

4.8.1 發射諧波


802.11a

操作模式 :	發射	調變技術 :	OFDM
基本波頻率 :	CH 36：5.18 GHz	測試儀器 :	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=10Hz
量測場地溫度 :	23℃	量測場地濕度 :	67%RH
測試日期 :	109 年 1 月 22 日	測試者 :	柯其宗

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	72.1 PK	74.0	-1.9	1.70 H	66	69.1	3.0
2	5150.00	53.6 AV	54.0	-0.4	1.70 H	66	50.6	3.0
3	*5180.00	116.5 PK			1.70 H	66	113.6	2.9
4	*5180.00	106.7 AV			1.70 H	66	103.8	2.9
5	#10360.00	45.9 PK	68.2	-22.3	2.15 H	88	33.9	12.0
6	15540.00	50.9 PK	74.0	-23.1	1.20 H	99	37.9	13.0
7	15540.00	38.5 AV	54.0	-15.5	1.20 H	99	25.5	13.0
8	20720.00	-	-	-	-	-	-	-
9	#25900.00	-	-	-	-	-	-	-
10	#31080.00	-	-	-	-	-	-	-
11	#36260.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

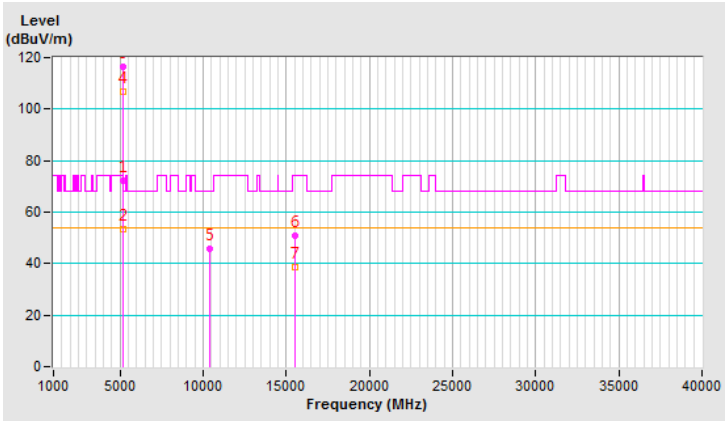


操 作 模 式 ：	發射	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 36：5.18 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=10Hz
量 測 場 地 溫 度 ：	23℃	量 測 場 地 濕 度 ：	67%RH
測 試 日 期 ：	109 年 1 月 22 日	測 試 者 ：	柯其宗

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	65.8 PK	74.0	-8.2	2.21 V	352	62.8	3.0
2	5150.00	47.3 AV	54.0	-6.7	2.21 V	352	44.3	3.0
3	*5180.00	115.7 PK			2.21 V	352	112.8	2.9
4	*5180.00	104.2 AV			2.21 V	352	101.3	2.9
5	#10360.00	45.0 PK	68.2	-23.2	1.04 V	113	33.0	12.0
6	15540.00	54.3 PK	74.0	-19.7	2.02 V	105	41.3	13.0
7	15540.00	40.8 AV	54.0	-13.2	2.02 V	105	27.8	13.0
8	20720.00	-	-	-	-	-	-	-
9	#25900.00	-	-	-	-	-	-	-
10	#31080.00	-	-	-	-	-	-	-
11	#36260.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

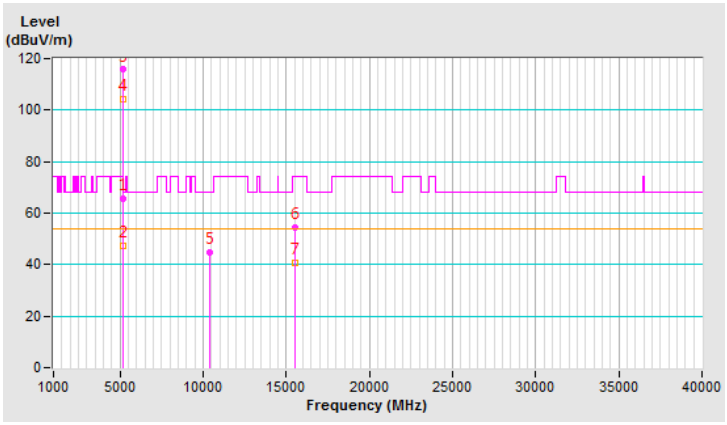


操 作 模 式 ：	發射	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 40：5.2 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=10Hz
量 測 場 地 溫 度 ：	23℃	量 測 場 地 濕 度 ：	67%RH
測 試 日 期 ：	109 年 1 月 22 日	測 試 者 ：	柯其宗

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	67.3 PK	74.0	-6.7	1.66 H	63	64.3	3.0
2	5150.00	46.3 AV	54.0	-7.7	1.66 H	63	43.3	3.0
3	*5200.00	117.1 PK			1.66 H	63	114.3	2.8
4	*5200.00	109.2 AV			1.66 H	63	106.4	2.8
5	#10400.00	46.1 PK	68.2	-22.1	2.14 H	70	34.0	12.1
6	15600.00	51.1 PK	74.0	-22.9	1.25 H	117	38.2	12.9
7	15600.00	38.8 AV	54.0	-15.2	1.25 H	117	25.9	12.9
8	20800.00	-	-	-	-	-	-	-
9	#26000.00	-	-	-	-	-	-	-
10	31200.00	-	-	-	-	-	-	-
11	#36400.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

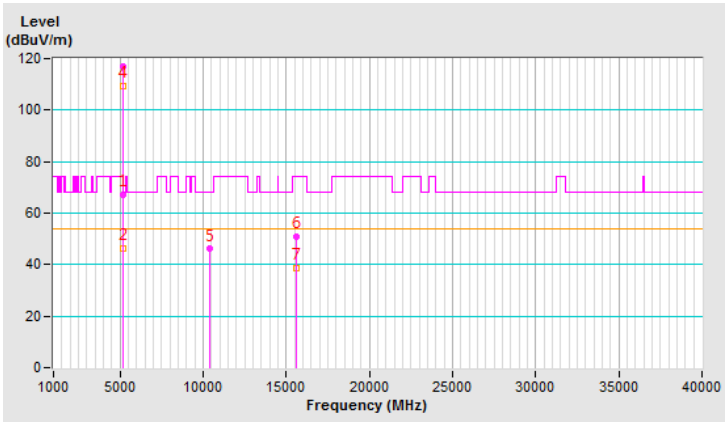


操 作 模 式 ：	發射	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 40：5.2 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=10Hz
量 測 場 地 溫 度 ：	23℃	量 測 場 地 濕 度 ：	67%RH
測 試 日 期 ：	109 年 1 月 22 日	測 試 者 ：	柯其宗

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	56.6 PK	74.0	-17.4	2.16 V	345	53.6	3.0
2	5150.00	45.1 AV	54.0	-8.9	2.16 V	345	42.1	3.0
3	*5200.00	118.3 PK			2.16 V	345	115.5	2.8
4	*5200.00	107.5 AV			2.16 V	345	104.7	2.8
5	#10400.00	44.8 PK	68.2	-23.4	1.03 V	118	32.7	12.1
6	15600.00	54.1 PK	74.0	-19.9	1.99 V	105	41.2	12.9
7	15600.00	40.4 AV	54.0	-13.6	1.99 V	105	27.5	12.9
8	20800.00	-	-	-	-	-	-	-
9	#26000.00	-	-	-	-	-	-	-
10	31200.00	-	-	-	-	-	-	-
11	#36400.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

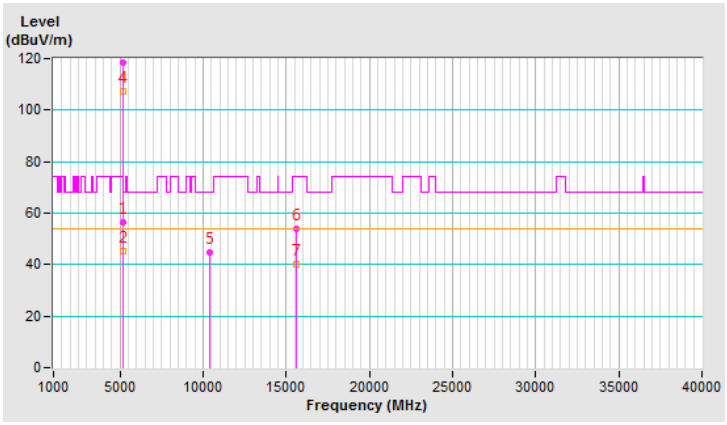


操 作 模 式 ：	發射	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 48：5.24 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=10Hz
量 測 場 地 溫 度 ：	23℃	量 測 場 地 濕 度 ：	67%RH
測 試 日 期 ：	109 年 1 月 22 日	測 試 者 ：	柯其宗

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5240.00	117.0 PK			1.65 H	59	114.4	2.6
2	*5240.00	108.9 AV			1.65 H	59	106.3	2.6
3	5350.00	54.5 PK	74.0	-19.5	1.65 H	59	51.9	2.6
4	5350.00	42.4 AV	54.0	-11.6	1.65 H	59	39.8	2.6
5	#10480.00	46.1 PK	68.2	-22.1	2.20 H	69	33.6	12.5
6	15720.00	51.0 PK	74.0	-23.0	1.29 H	94	38.8	12.2
7	15720.00	38.6 AV	54.0	-15.4	1.29 H	94	26.4	12.2
8	20960.00	-	-	-	-	-	-	-
9	#26200.00	-	-	-	-	-	-	-
10	31440.00	-	-	-	-	-	-	-
11	#36680.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

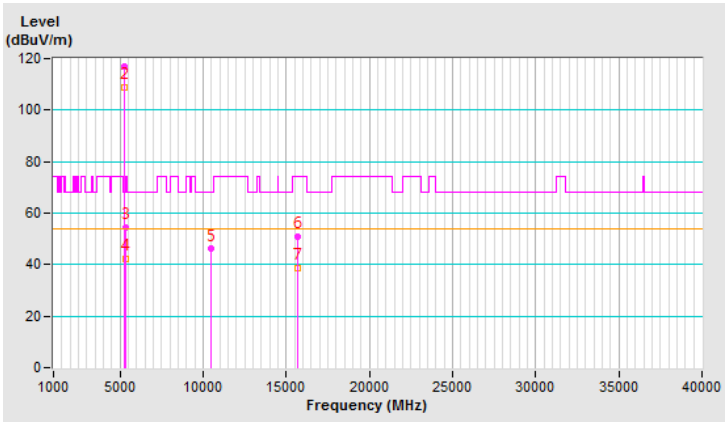


操 作 模 式 ：	發射	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 48：5.24 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=10Hz
量 測 場 地 溫 度 ：	23℃	量 測 場 地 濕 度 ：	67%RH
測 試 日 期 ：	109 年 1 月 22 日	測 試 者 ：	柯其宗

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5240.00	117.7 PK			2.07 V	344	115.1	2.6
2	*5240.00	107.2 AV			2.07 V	344	104.6	2.6
3	5350.00	52.9 PK	74.0	-21.1	2.07 V	344	50.3	2.6
4	5350.00	41.7 AV	54.0	-12.3	2.07 V	344	39.1	2.6
5	#10480.00	45.3 PK	68.2	-22.9	1.01 V	105	32.8	12.5
6	15720.00	54.4 PK	74.0	-19.6	2.02 V	91	42.2	12.2
7	15720.00	40.9 AV	54.0	-13.1	2.02 V	91	28.7	12.2
8	20960.00	-	-	-	-	-	-	-
9	#26200.00	-	-	-	-	-	-	-
10	31440.00	-	-	-	-	-	-	-
11	#36680.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

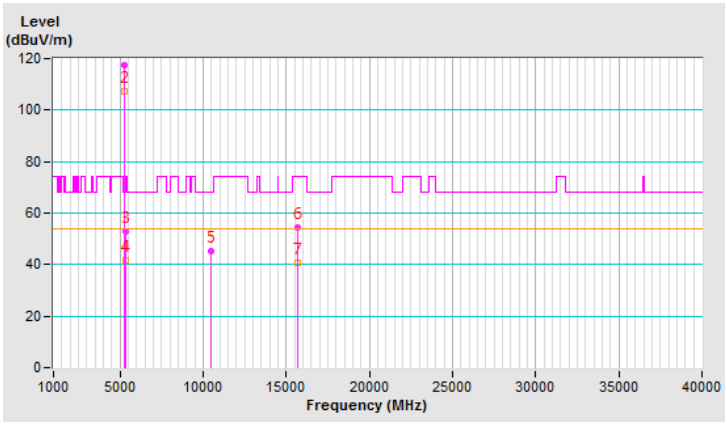


操 作 模 式 ：	發射	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 52：5.26 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=10Hz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	71%RH
測 試 日 期 ：	109 年 2 月 28 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	52.4 PK	74.0	-21.6	1.66 H	62	49.4	3.0
2	5150.00	42.2 AV	54.0	-11.8	1.66 H	62	39.2	3.0
3	*5260.00	117.6 PK			1.66 H	62	115.1	2.5
4	*5260.00	108.1 AV			1.66 H	62	105.6	2.5
5	#10520.00	47.2 PK	68.2	-21.0	3.54 H	197	34.6	12.6
6	15780.00	49.7 PK	74.0	-24.3	1.60 H	184	37.9	11.8
7	15780.00	36.4 AV	54.0	-17.6	1.60 H	184	24.6	11.8
8	21040.00	-	-	-	-	-	-	-
9	#26300.00	-	-	-	-	-	-	-
10	31560.00	-	-	-	-	-	-	-
11	#36820.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

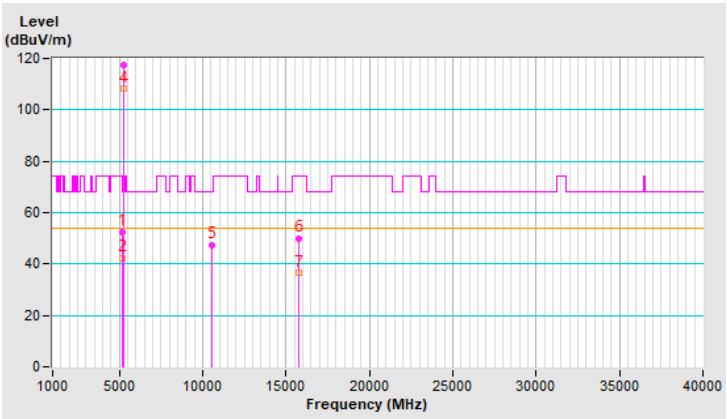


操 作 模 式 ：	發射	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 52：5.26 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=10Hz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	71%RH
測 試 日 期 ：	109 年 2 月 28 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	51.9 PK	74.0	-22.1	2.73 V	100	48.9	3.0
2	5150.00	41.4 AV	54.0	-12.6	2.73 V	100	38.4	3.0
3	*5260.00	114.4 PK			2.73 V	100	111.9	2.5
4	*5260.00	104.5 AV			2.73 V	100	102.0	2.5
5	#10520.00	47.7 PK	68.2	-20.5	3.14 V	207	35.1	12.6
6	15780.00	47.2 PK	74.0	-26.8	3.60 V	189	35.4	11.8
7	15780.00	33.9 AV	54.0	-20.1	3.60 V	189	22.1	11.8
8	21040.00	-	-	-	-	-	-	-
9	#26300.00	-	-	-	-	-	-	-
10	31560.00	-	-	-	-	-	-	-
11	#36820.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

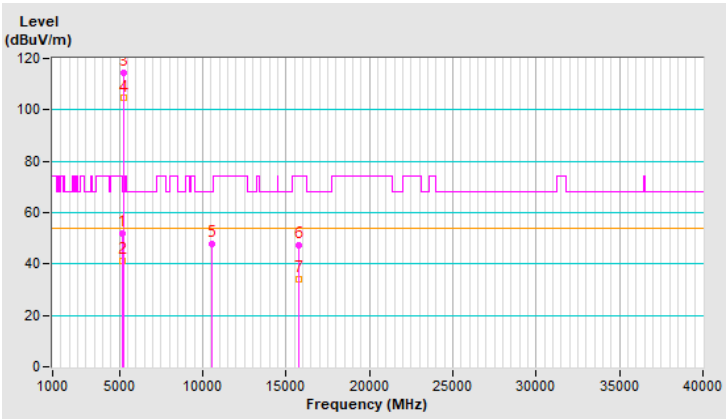


操 作 模 式 ：	發射	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 60：5.3 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=10Hz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	71%RH
測 試 日 期 ：	109 年 2 月 28 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5300.00	117.6 PK			1.59 H	69	115.2	2.4
2	*5300.00	108.2 AV			1.59 H	69	105.8	2.4
3	5350.00	60.0 PK	74.0	-14.0	1.59 H	69	57.4	2.6
4	5350.00	44.8 AV	54.0	-9.2	1.59 H	69	42.2	2.6
5	10600.00	46.8 PK	74.0	-27.2	3.60 H	181	34.4	12.4
6	10600.00	33.8 AV	54.0	-20.2	3.60 H	181	21.4	12.4
7	15900.00	49.1 PK	74.0	-24.9	1.57 H	168	37.0	12.1
8	15900.00	36.0 AV	54.0	-18.0	1.57 H	168	23.9	12.1
9	21200.00	-	-	-	-	-	-	-
10	#26500.00	-	-	-	-	-	-	-
11	31800.00	-	-	-	-	-	-	-
12	#37100.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

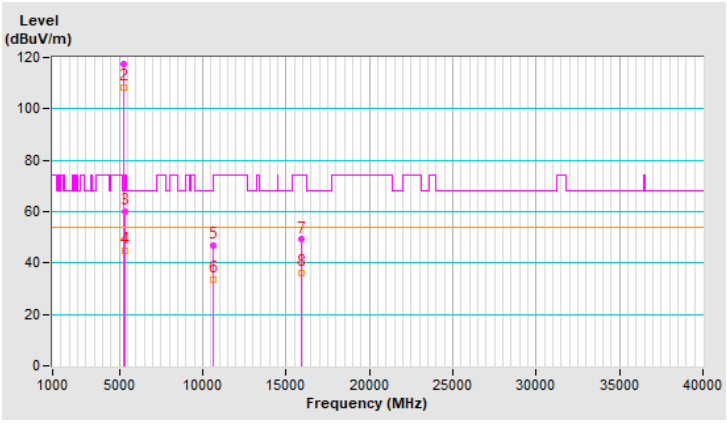


操 作 模 式 ：	發射	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 60：5.3 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=10Hz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	71%RH
測 試 日 期 ：	109 年 2 月 28 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5300.00	114.3 PK			2.76 V	91	111.9	2.4
2	*5300.00	104.2 AV			2.76 V	91	101.8	2.4
3	5350.00	57.9 PK	74.0	-16.1	2.76 V	91	55.3	2.6
4	5350.00	42.4 AV	54.0	-11.6	2.76 V	91	39.8	2.6
5	10600.00	47.8 PK	74.0	-26.2	3.13 V	215	35.4	12.4
6	10600.00	35.0 AV	54.0	-19.0	3.13 V	215	22.6	12.4
7	15900.00	47.5 PK	74.0	-26.5	3.58 V	184	35.4	12.1
8	15900.00	34.0 AV	54.0	-20.0	3.58 V	184	21.9	12.1
9	21200.00	-	-	-	-	-	-	-
10	#26500.00	-	-	-	-	-	-	-
11	31800.00	-	-	-	-	-	-	-
12	#37100.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

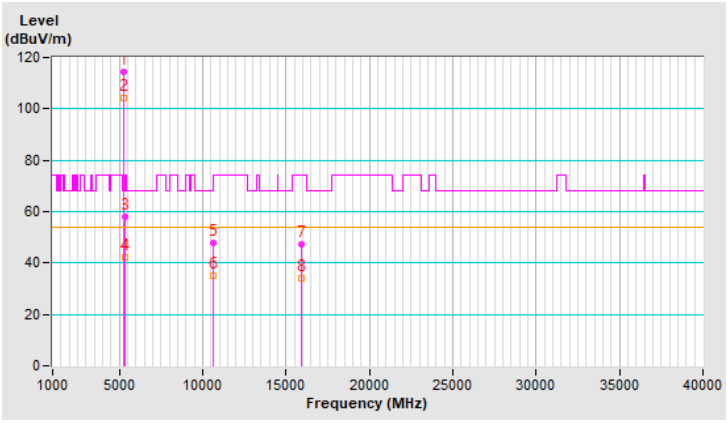


操 作 模 式 ：	發射	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 64：5.32 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=10Hz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	71%RH
測 試 日 期 ：	109 年 2 月 28 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5320.00	116.3 PK			1.61 H	54	113.8	2.5
2	*5320.00	107.4 AV			1.61 H	54	104.9	2.5
3	5350.00	72.2 PK	74.0	-1.8	1.61 H	54	69.6	2.6
4	5350.00	53.5 AV	54.0	-0.5	1.61 H	54	50.9	2.6
5	10640.00	47.4 PK	74.0	-26.6	3.49 H	193	35.0	12.4
6	10640.00	34.6 AV	54.0	-19.4	3.49 H	193	22.2	12.4
7	15960.00	49.2 PK	74.0	-24.8	1.57 H	185	36.8	12.4
8	15960.00	35.9 AV	54.0	-18.1	1.57 H	185	23.5	12.4
9	21280.00	-	-	-	-	-	-	-
10	#26600.00	-	-	-	-	-	-	-
11	#31920.00	-	-	-	-	-	-	-
12	#37240.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

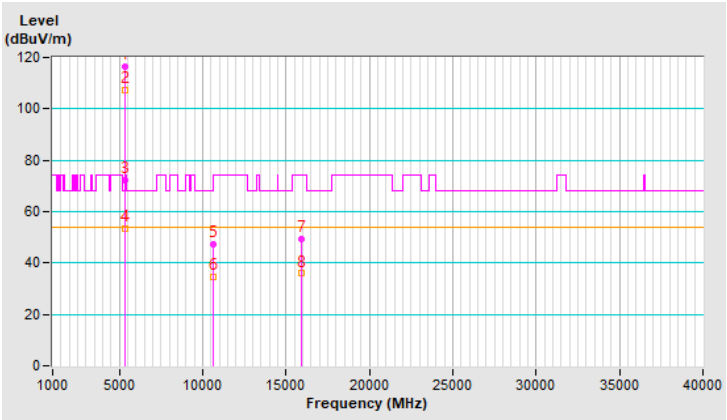


操 作 模 式 ：	發射	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 64：5.32 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=10Hz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	71%RH
測 試 日 期 ：	109 年 2 月 28 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5320.00	113.5 PK			2.71 V	106	111.0	2.5
2	*5320.00	103.3 AV			2.71 V	106	100.8	2.5
3	5350.00	66.6 PK	74.0	-7.4	2.71 V	106	64.0	2.6
4	5350.00	50.3 AV	54.0	-3.7	2.71 V	106	47.7	2.6
5	10640.00	47.6 PK	74.0	-26.4	3.10 V	209	35.2	12.4
6	10640.00	34.6 AV	54.0	-19.4	3.10 V	209	22.2	12.4
7	15960.00	46.9 PK	74.0	-27.1	3.58 V	194	34.5	12.4
8	15960.00	33.8 AV	54.0	-20.2	3.58 V	194	21.4	12.4
9	21280.00	-	-	-	-	-	-	-
10	#26600.00	-	-	-	-	-	-	-
11	#31920.00	-	-	-	-	-	-	-
12	#37240.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

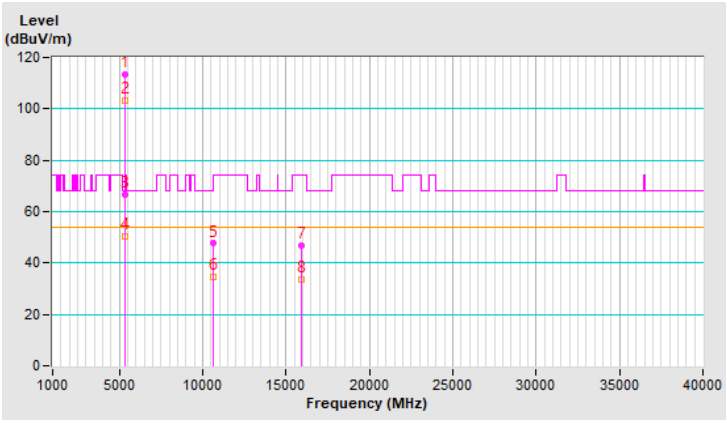


操 作 模 式 ：	發射	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 100：5.5 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=10Hz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	71%RH
測 試 日 期 ：	109 年 2 月 28 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	57.7 PK	74.0	-16.3	1.52 H	54	54.7	3.0
2	5460.00	42.1 AV	54.0	-11.9	1.52 H	54	39.1	3.0
3	#5470.00	68.1 PK	68.2	-0.1	1.52 H	54	65.0	3.1
4	*5500.00	112.9 PK			1.52 H	54	109.8	3.1
5	*5500.00	104.2 AV			1.52 H	54	101.1	3.1
6	11000.00	45.9 PK	74.0	-28.1	3.63 H	223	33.3	12.6
7	11000.00	32.7 AV	54.0	-21.3	3.63 H	223	20.1	12.6
8	#16500.00	48.0 PK	68.2	-20.2	1.58 H	160	34.4	13.6
9	#22000.00	-	-	-	-	-	-	-
10	#27500.00	-	-	-	-	-	-	-
11	#33000.00	-	-	-	-	-	-	-
12	#38500.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

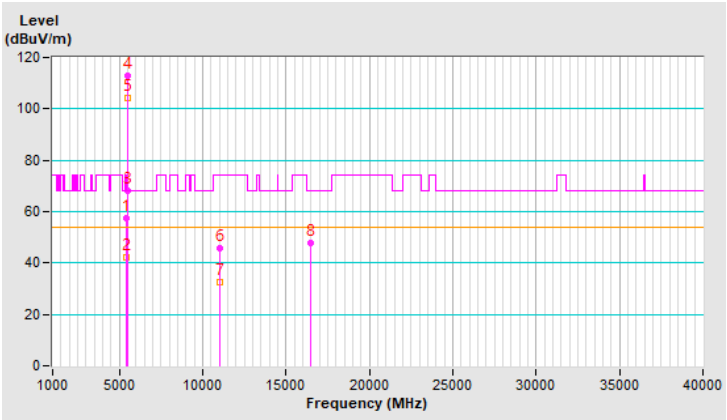


操 作 模 式 ：	發射	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 100：5.5 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=10Hz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	71%RH
測 試 日 期 ：	109 年 2 月 28 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	55.4 PK	74.0	-18.6	2.77 V	86	52.4	3.0
2	5460.00	41.4 AV	54.0	-12.6	2.77 V	86	38.4	3.0
3	#5470.00	65.3 PK	68.2	-2.9	2.77 V	86	62.2	3.1
4	*5500.00	110.3 PK			2.77 V	86	107.2	3.1
5	*5500.00	101.3 AV			2.77 V	86	98.2	3.1
6	11000.00	45.7 PK	74.0	-28.3	3.11 V	216	33.1	12.6
7	11000.00	32.5 AV	54.0	-21.5	3.11 V	216	19.9	12.6
8	#16500.00	45.7 PK	68.2	-22.5	3.57 V	161	32.1	13.6
9	#22000.00	-	-	-	-	-	-	-
10	#27500.00	-	-	-	-	-	-	-
11	#33000.00	-	-	-	-	-	-	-
12	#38500.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

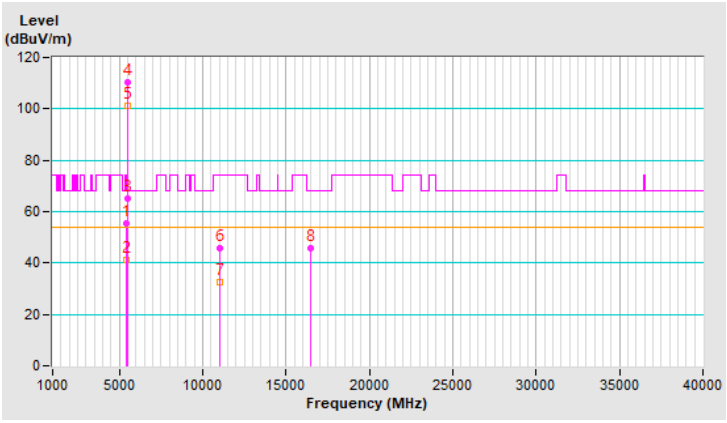


操 作 模 式 ：	發射	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 116：5.58 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=10Hz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	71%RH
測 試 日 期 ：	109 年 2 月 28 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	54.6 PK	74.0	-19.4	1.58 H	41	51.6	3.0
2	5460.00	41.9 AV	54.0	-12.1	1.58 H	41	38.9	3.0
3	#5470.00	55.1 PK	68.2	-13.1	1.58 H	41	52.0	3.1
4	*5580.00	117.4 PK			1.58 H	41	114.4	3.0
5	*5580.00	107.8 AV			1.58 H	41	104.8	3.0
6	11160.00	46.5 PK	74.0	-27.5	3.59 H	197	34.1	12.4
7	11160.00	32.9 AV	54.0	-21.1	3.59 H	197	20.5	12.4
8	#16740.00	47.4 PK	68.2	-20.8	1.65 H	175	32.6	14.8
9	22320.00	-	-	-	-	-	-	-
10	#27900.00	-	-	-	-	-	-	-
11	#33480.00	-	-	-	-	-	-	-
12	39060.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

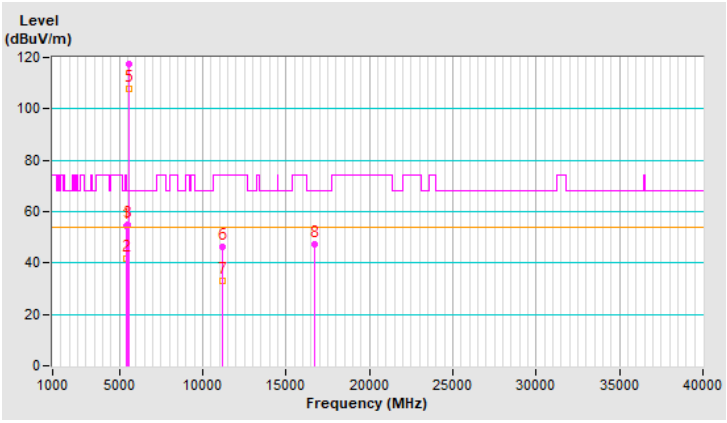


操 作 模 式 ：	發射	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 116：5.58 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=10Hz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	71%RH
測 試 日 期 ：	109 年 2 月 28 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	54.3 PK	74.0	-19.7	2.75 V	111	51.3	3.0
2	5460.00	41.2 AV	54.0	-12.8	2.75 V	111	38.2	3.0
3	#5470.00	54.9 PK	68.2	-13.3	2.75 V	111	51.8	3.1
4	*5580.00	114.5 PK			2.75 V	111	111.5	3.0
5	*5580.00	104.0 AV			2.75 V	111	101.0	3.0
6	11160.00	47.6 PK	74.0	-26.4	3.19 V	203	35.2	12.4
7	11160.00	34.6 AV	54.0	-19.4	3.19 V	203	22.2	12.4
8	#16740.00	46.6 PK	68.2	-21.6	3.60 V	193	31.8	14.8
9	22320.00	-	-	-	-	-	-	-
10	#27900.00	-	-	-	-	-	-	-
11	#33480.00	-	-	-	-	-	-	-
12	39060.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

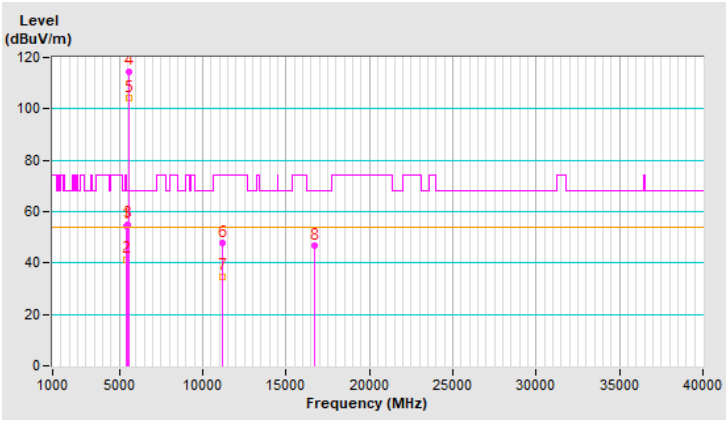


操 作 模 式 ：	發射	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 140：5.7 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=10Hz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	71%RH
測 試 日 期 ：	109 年 2 月 28 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5700.00	112.2 PK			1.66 H	60	109.0	3.2
2	*5700.00	103.4 AV			1.66 H	60	100.2	3.2
3	#5725.00	68.0 PK	68.2	-0.2	1.66 H	60	64.7	3.3
4	11400.00	45.8 PK	74.0	-28.2	3.65 H	239	32.8	13.0
5	11400.00	32.6 AV	54.0	-21.4	3.65 H	239	19.6	13.0
6	#17100.00	47.4 PK	68.2	-20.8	1.58 H	153	31.1	16.3
7	22800.00	-	-	-	-	-	-	-
8	#28500.00	-	-	-	-	-	-	-
9	#34200.00	-	-	-	-	-	-	-
10	39900.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

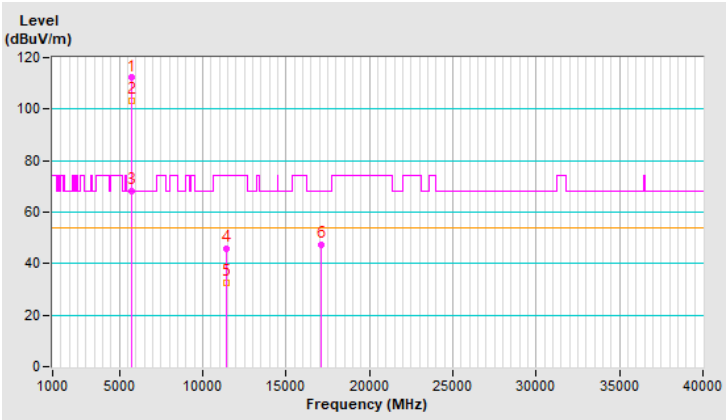


操 作 模 式 ：	發射	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 140：5.7 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=10Hz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	71%RH
測 試 日 期 ：	109 年 2 月 28 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5700.00	109.7 PK			2.70 V	92	106.5	3.2
2	*5700.00	100.9 AV			2.70 V	92	97.7	3.2
3	#5725.00	65.3 PK	68.2	-2.9	2.70 V	92	62.0	3.3
4	11400.00	45.3 PK	74.0	-28.7	3.08 V	212	32.3	13.0
5	11400.00	32.2 AV	54.0	-21.8	3.08 V	212	19.2	13.0
6	#17100.00	46.0 PK	68.2	-22.2	3.58 V	163	29.7	16.3
7	22800.00	-	-	-	-	-	-	-
8	#28500.00	-	-	-	-	-	-	-
9	#34200.00	-	-	-	-	-	-	-
10	39900.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

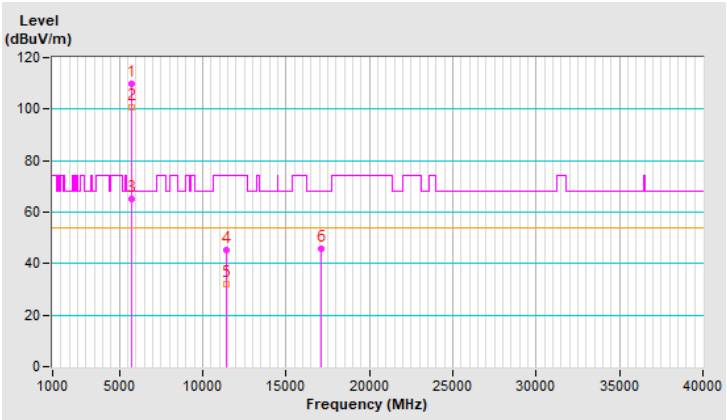


操 作 模 式 ：	發射	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 144：5.72 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=10Hz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	71%RH
測 試 日 期 ：	109 年 2 月 28 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	52.2 PK	74.0	-21.8	1.59 H	50	49.2	3.0
2	5460.00	39.5 AV	54.0	-14.5	1.59 H	50	36.5	3.0
3	#5470.00	51.8 PK	68.2	-16.4	1.59 H	50	48.7	3.1
4	*5720.00	117.7 PK			1.59 H	50	114.5	3.2
5	*5720.00	107.9 AV			1.59 H	50	104.7	3.2
6	#5850.00	54.5 PK	68.2	-13.7	1.59 H	50	50.8	3.7
7	11440.00	47.3 PK	74.0	-26.7	3.51 H	209	34.5	12.8
8	11440.00	34.1 AV	54.0	-19.9	3.51 H	209	21.3	12.8
9	#17160.00	50.1 PK	68.2	-18.1	1.60 H	181	33.5	16.6
10	22880.00	-	-	-	-	-	-	-
11	#28600.00	-	-	-	-	-	-	-
12	#34320.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

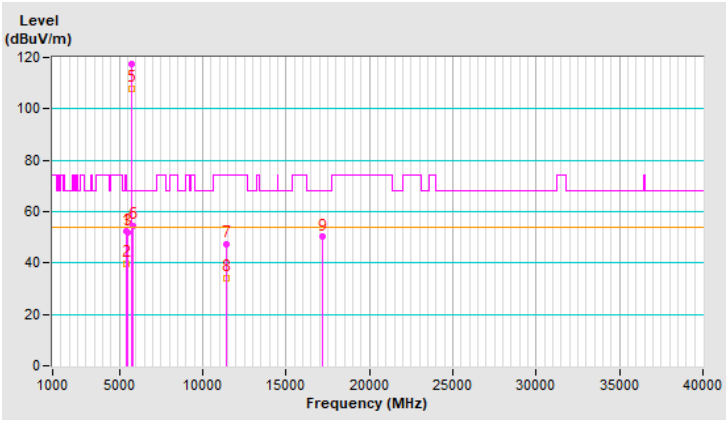


操 作 模 式 ：	發射	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 144：5.72 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=10Hz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	71%RH
測 試 日 期 ：	109 年 2 月 28 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	51.9 PK	74.0	-22.1	2.76 V	85	48.9	3.0
2	5460.00	38.8 AV	54.0	-15.2	2.76 V	85	35.8	3.0
3	#5470.00	51.4 PK	68.2	-16.8	2.76 V	85	48.3	3.1
4	*5720.00	114.9 PK			2.76 V	85	111.7	3.2
5	*5720.00	104.3 AV			2.76 V	85	101.1	3.2
6	#5850.00	54.0 PK	68.2	-14.2	2.76 V	85	50.3	3.7
7	11440.00	47.4 PK	74.0	-26.6	3.20 V	211	34.6	12.8
8	11440.00	34.4 AV	54.0	-19.6	3.20 V	211	21.6	12.8
9	#17160.00	46.7 PK	68.2	-21.5	3.57 V	200	30.1	16.6
10	22880.00	-	-	-	-	-	-	-
11	#28600.00	-	-	-	-	-	-	-
12	#34320.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

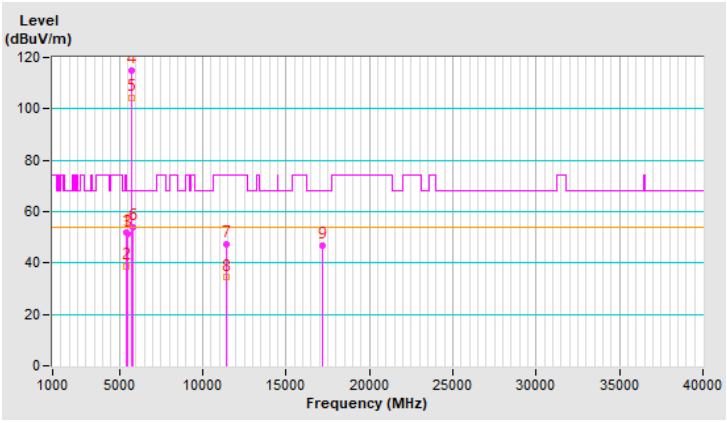


操 作 模 式 ：	發射	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 149：5.745 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=10Hz
量 測 場 地 溫 度 ：	23℃	量 測 場 地 濕 度 ：	67%RH
測 試 日 期 ：	109 年 1 月 22 日	測 試 者 ：	柯其宗

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5745.00	119.5 PK			1.38 H	46	116.2	3.3
2	*5745.00	109.9 AV			1.38 H	46	106.6	3.3
3	11490.00	43.5 PK	74.0	-30.5	2.15 H	91	30.9	12.6
4	11490.00	32.5 AV	54.0	-21.5	2.15 H	91	19.9	12.6
5	#17235.00	56.3 PK	68.2	-11.9	1.28 H	91	39.5	16.8
6	22980.00	-	-	-	-	-	-	-
7	#28725.00	-	-	-	-	-	-	-
8	#34470.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

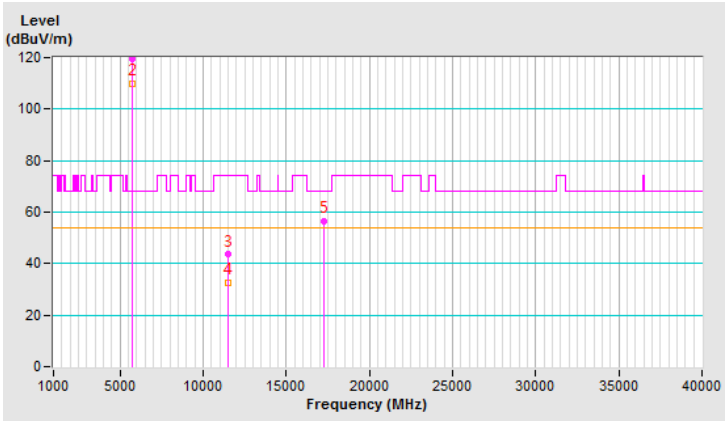


操 作 模 式 ：	發射	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 149：5.745 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=10Hz
量 測 場 地 溫 度 ：	23℃	量 測 場 地 濕 度 ：	67%RH
測 試 日 期 ：	109 年 1 月 22 日	測 試 者 ：	柯其宗

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5745.00	118.1 PK			3.93 V	352	114.8	3.3
2	*5745.00	108.0 AV			3.93 V	352	104.7	3.3
3	11490.00	43.7 PK	74.0	-30.3	1.05 V	115	31.1	12.6
4	11490.00	33.6 AV	54.0	-20.4	1.05 V	115	21.0	12.6
5	#17235.00	60.1 PK	68.2	-8.1	2.06 V	108	43.3	16.8
6	22980.00	-	-	-	-	-	-	-
7	#28725.00	-	-	-	-	-	-	-
8	#34470.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

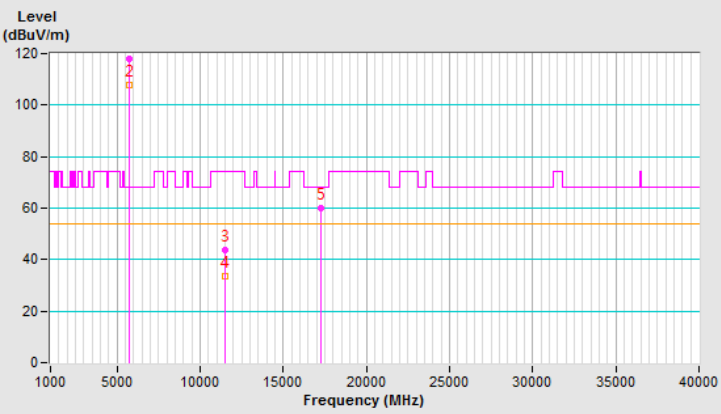


操 作 模 式 ：	發射	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 157：5.785 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=10Hz
量 測 場 地 溫 度 ：	23℃	量 測 場 地 濕 度 ：	67%RH
測 試 日 期 ：	109 年 1 月 22 日	測 試 者 ：	柯其宗

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5785.00	118.9 PK			1.57 H	50	115.5	3.4
2	*5785.00	109.7 AV			1.57 H	50	106.3	3.4
3	11570.00	43.2 PK	74.0	-30.8	2.16 H	92	31.0	12.2
4	11570.00	32.4 AV	54.0	-21.6	2.16 H	92	20.2	12.2
5	#17355.00	56.4 PK	68.2	-11.8	1.24 H	104	39.8	16.6
6	#23140.00	-	-	-	-	-	-	-
7	#28925.00	-	-	-	-	-	-	-
8	#34710.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

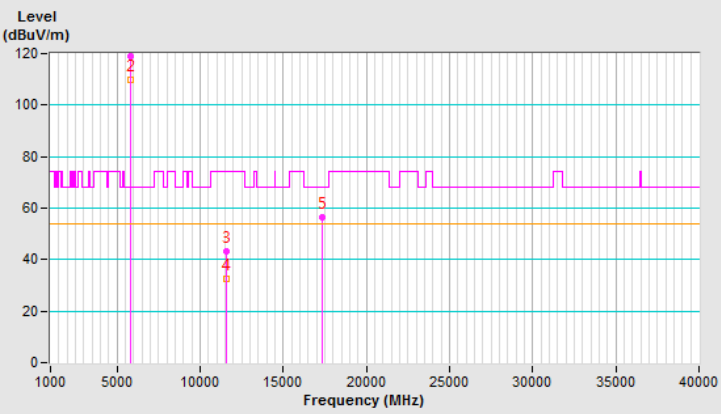


操 作 模 式 ：	發射	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 157：5.785 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=10Hz
量 測 場 地 溫 度 ：	23℃	量 測 場 地 濕 度 ：	67%RH
測 試 日 期 ：	109 年 1 月 22 日	測 試 者 ：	柯其宗

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5785.00	116.9 PK			3.90 V	345	113.5	3.4
2	*5785.00	107.6 AV			3.90 V	345	104.2	3.4
3	11570.00	43.4 PK	74.0	-30.6	1.01 V	106	31.2	12.2
4	11570.00	33.4 AV	54.0	-20.6	1.01 V	106	21.2	12.2
5	#17355.00	60.0 PK	68.2	-8.2	2.01 V	103	43.4	16.6
6	#23140.00	-	-	-	-	-	-	-
7	#28925.00	-	-	-	-	-	-	-
8	#34710.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

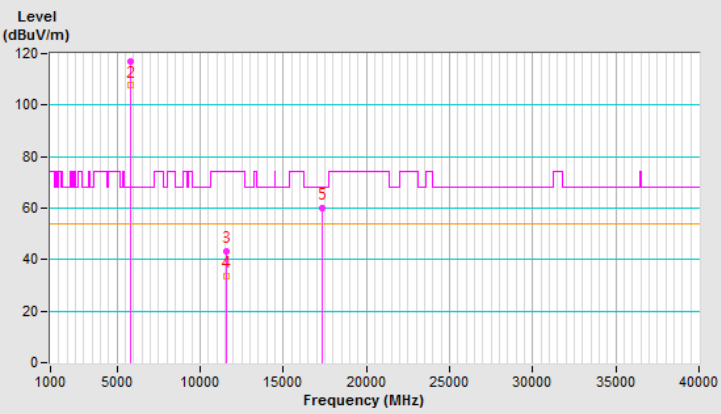


操 作 模 式 ：	發射	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 165：5.825 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=10Hz
量 測 場 地 溫 度 ：	23℃	量 測 場 地 濕 度 ：	67%RH
測 試 日 期 ：	109 年 1 月 22 日	測 試 者 ：	柯其宗

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5825.00	119.6 PK			1.54 H	42	116.0	3.6
2	*5825.00	110.2 AV			1.54 H	42	106.6	3.6
3	11650.00	43.3 PK	74.0	-30.7	2.17 H	83	30.9	12.4
4	11650.00	32.7 AV	54.0	-21.3	2.17 H	83	20.3	12.4
5	#17475.00	56.3 PK	68.2	-11.9	1.25 H	102	39.3	17.0
6	#23300.00	-	-	-	-	-	-	-
7	#29125.00	-	-	-	-	-	-	-
8	#34950.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

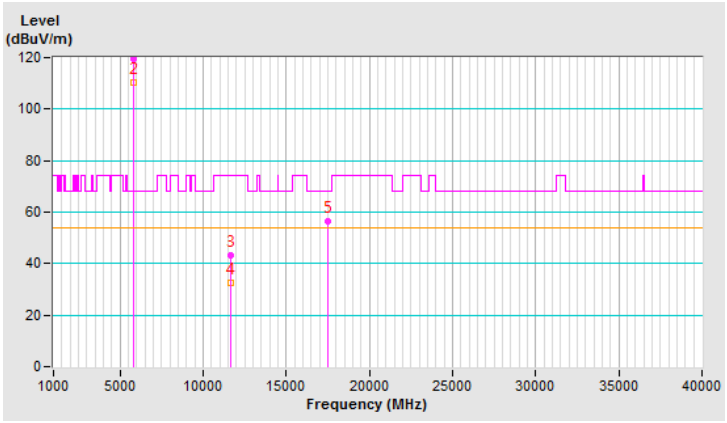


操 作 模 式 ：	發射	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 165：5.825 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=10Hz
量 測 場 地 溫 度 ：	23℃	量 測 場 地 濕 度 ：	67%RH
測 試 日 期 ：	109 年 1 月 22 日	測 試 者 ：	柯其宗

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5825.00	118.5 PK			3.99 V	4	114.9	3.6
2	*5825.00	108.3 AV			3.99 V	4	104.7	3.6
3	11650.00	43.8 PK	74.0	-30.2	1.06 V	111	31.4	12.4
4	11650.00	33.8 AV	54.0	-20.2	1.06 V	111	21.4	12.4
5	#17475.00	60.0 PK	68.2	-8.2	2.06 V	93	43.0	17.0
6	#23300.00	-	-	-	-	-	-	-
7	#29125.00	-	-	-	-	-	-	-
8	#34950.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

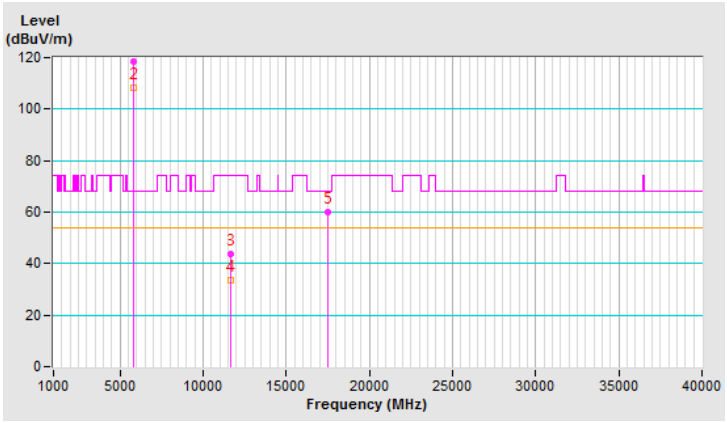


802.11ax (HE20)

操作模式：	發射	調變技術：	OFDMA
基本波頻率：	CH 36：5.18 GHz	測試儀器：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量測場地溫度：	23℃	量測場地濕度：	67%RH
測試日期：	109 年 1 月 22 日	測試者：	柯其宗

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	70.8 PK	74.0	-3.2	2.25 H	60	67.8	3.0
2	5150.00	53.6 AV	54.0	-0.4	2.25 H	60	50.6	3.0
3	*5180.00	116.4 PK			2.25 H	60	113.5	2.9
4	*5180.00	105.5 AV			2.25 H	60	102.6	2.9
5	#10360.00	45.5 PK	68.2	-22.7	2.27 H	77	33.5	12.0
6	15540.00	50.9 PK	74.0	-23.1	1.22 H	92	37.9	13.0
7	15540.00	38.8 AV	54.0	-15.2	1.22 H	92	25.8	13.0
8	20720.00	-	-	-	-	-	-	-
9	#25900.00	-	-	-	-	-	-	-
10	#31080.00	-	-	-	-	-	-	-
11	#36260.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

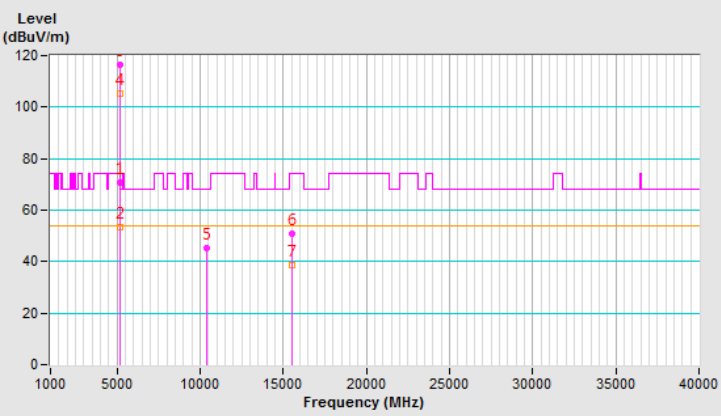


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 36：5.18 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	23℃	量 測 場 地 濕 度 ：	67%RH
測 試 日 期 ：	109 年 1 月 22 日	測 試 者 ：	柯其宗

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	64.9 PK	74.0	-9.1	2.01 V	359	61.9	3.0
2	5150.00	47.2 AV	54.0	-6.8	2.01 V	359	44.2	3.0
3	*5180.00	114.8 PK			2.01 V	359	111.9	2.9
4	*5180.00	103.3 AV			2.01 V	359	100.4	2.9
5	#10360.00	45.1 PK	68.2	-23.1	1.02 V	117	33.1	12.0
6	15540.00	53.3 PK	74.0	-20.7	2.07 V	91	40.3	13.0
7	15540.00	39.6 AV	54.0	-14.4	2.07 V	91	26.6	13.0
8	20720.00	-	-	-	-	-	-	-
9	#25900.00	-	-	-	-	-	-	-
10	#31080.00	-	-	-	-	-	-	-
11	#36260.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

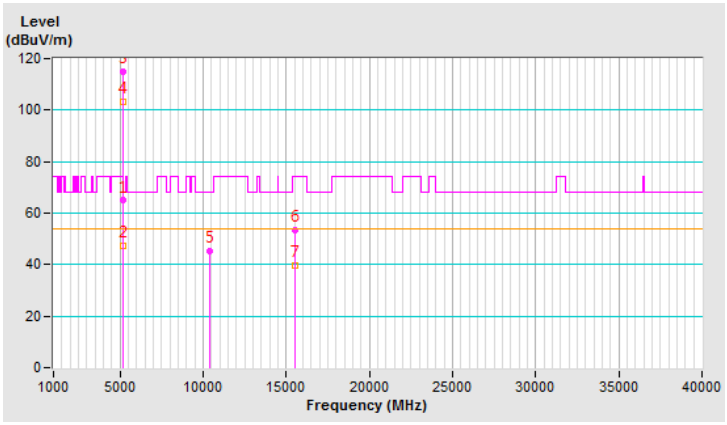


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 40：5.2 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	23℃	量 測 場 地 濕 度 ：	67%RH
測 試 日 期 ：	109 年 1 月 22 日	測 試 者 ：	柯其宗

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	65.9 PK	74.0	-8.1	2.30 H	46	62.9	3.0
2	5150.00	45.7 AV	54.0	-8.3	2.30 H	46	42.7	3.0
3	*5200.00	117.1 PK			2.30 H	46	114.3	2.8
4	*5200.00	108.7 AV			2.30 H	46	105.9	2.8
5	#10400.00	46.2 PK	68.2	-22.0	2.19 H	91	34.1	12.1
6	15600.00	51.1 PK	74.0	-22.9	1.24 H	93	38.2	12.9
7	15600.00	38.9 AV	54.0	-15.1	1.24 H	93	26.0	12.9
8	20800.00	-	-	-	-	-	-	-
9	#26000.00	-	-	-	-	-	-	-
10	31200.00	-	-	-	-	-	-	-
11	#36400.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

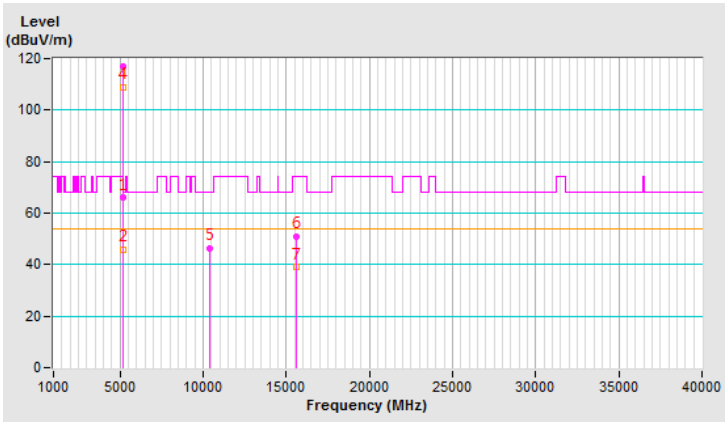


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 40：5.2 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	23℃	量 測 場 地 濕 度 ：	67%RH
測 試 日 期 ：	109 年 1 月 22 日	測 試 者 ：	柯其宗

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	56.0 PK	74.0	-18.0	2.17 V	330	53.0	3.0
2	5150.00	43.2 AV	54.0	-10.8	2.17 V	330	40.2	3.0
3	*5200.00	117.4 PK			2.17 V	330	114.6	2.8
4	*5200.00	106.9 AV			2.17 V	330	104.1	2.8
5	#10400.00	45.1 PK	68.2	-23.1	1.00 V	107	33.0	12.1
6	15600.00	53.9 PK	74.0	-20.1	2.12 V	89	41.0	12.9
7	15600.00	40.3 AV	54.0	-13.7	2.12 V	89	27.4	12.9
8	20800.00	-	-	-	-	-	-	-
9	#26000.00	-	-	-	-	-	-	-
10	31200.00	-	-	-	-	-	-	-
11	#36400.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

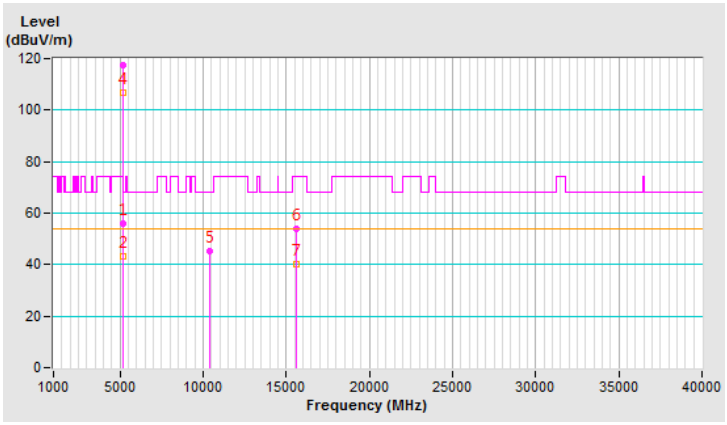


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 48：5.24 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	23℃	量 測 場 地 濕 度 ：	67%RH
測 試 日 期 ：	109 年 1 月 22 日	測 試 者 ：	柯其宗

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5240.00	116.7 PK			2.09 H	75	114.1	2.6
2	*5240.00	108.5 AV			2.09 H	75	105.9	2.6
3	5350.00	54.5 PK	74.0	-19.5	2.09 H	75	51.9	2.6
4	5350.00	42.2 AV	54.0	-11.8	2.09 H	75	39.6	2.6
5	#10480.00	46.2 PK	68.2	-22.0	2.13 H	104	33.7	12.5
6	15720.00	49.9 PK	74.0	-24.1	1.24 H	86	37.7	12.2
7	15720.00	38.0 AV	54.0	-16.0	1.24 H	86	25.8	12.2
8	20960.00	-	-	-	-	-	-	-
9	#26200.00	-	-	-	-	-	-	-
10	31440.00	-	-	-	-	-	-	-
11	#36680.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

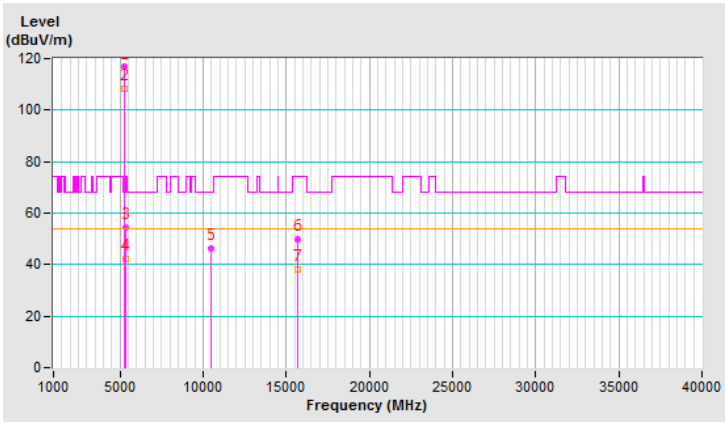


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 48：5.24 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	23℃	量 測 場 地 濕 度 ：	67%RH
測 試 日 期 ：	109 年 1 月 22 日	測 試 者 ：	柯其宗

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5240.00	116.8 PK			2.13 V	343	114.2	2.6
2	*5240.00	106.5 AV			2.13 V	343	103.9	2.6
3	5350.00	53.1 PK	74.0	-20.9	2.13 V	343	50.5	2.6
4	5350.00	40.8 AV	54.0	-13.2	2.13 V	343	38.2	2.6
5	#10480.00	45.2 PK	68.2	-23.0	1.05 V	112	32.7	12.5
6	15720.00	54.2 PK	74.0	-19.8	2.14 V	83	42.0	12.2
7	15720.00	40.7 AV	54.0	-13.3	2.14 V	83	28.5	12.2
8	20960.00	-	-	-	-	-	-	-
9	#26200.00	-	-	-	-	-	-	-
10	31440.00	-	-	-	-	-	-	-
11	#36680.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

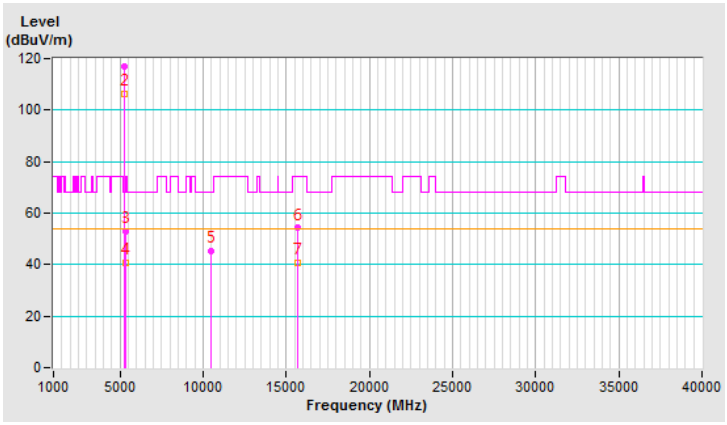


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 52：5.26 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	71%RH
測 試 日 期 ：	109 年 2 月 28 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	54.7 PK	74.0	-19.3	1.62 H	46	51.7	3.0
2	5150.00	43.7 AV	54.0	-10.3	1.62 H	46	40.7	3.0
3	*5260.00	118.3 PK			1.62 H	46	115.8	2.5
4	*5260.00	108.2 AV			1.62 H	46	105.7	2.5
5	#10520.00	46.2 PK	68.2	-22.0	3.66 H	223	33.6	12.6
6	15780.00	48.1 PK	74.0	-25.9	1.54 H	168	36.3	11.8
7	15780.00	34.7 AV	54.0	-19.3	1.54 H	168	22.9	11.8
8	21040.00	-	-	-	-	-	-	-
9	#26300.00	-	-	-	-	-	-	-
10	31560.00	-	-	-	-	-	-	-
11	#36820.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

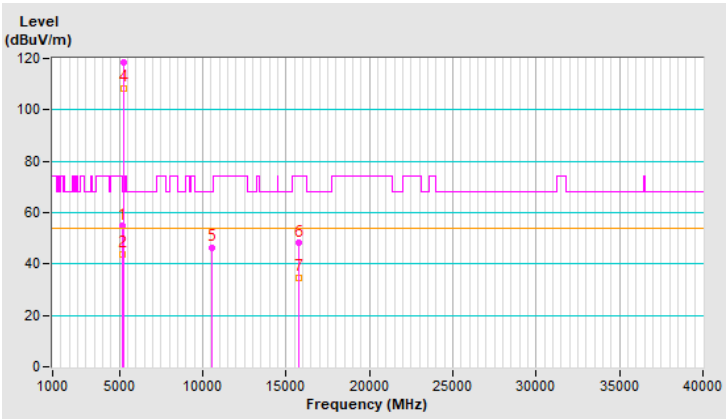


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 52：5.26 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	71%RH
測 試 日 期 ：	109 年 2 月 28 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	53.9 PK	74.0	-20.1	2.70 V	85	50.9	3.0
2	5150.00	43.0 AV	54.0	-11.0	2.70 V	85	40.0	3.0
3	*5260.00	115.5 PK			2.70 V	85	113.0	2.5
4	*5260.00	105.5 AV			2.70 V	85	103.0	2.5
5	#10520.00	45.2 PK	68.2	-23.0	3.07 V	207	32.6	12.6
6	15780.00	45.8 PK	74.0	-28.2	3.62 V	145	34.0	11.8
7	15780.00	32.6 AV	54.0	-21.4	3.62 V	145	20.8	11.8
8	21040.00	-	-	-	-	-	-	-
9	#26300.00	-	-	-	-	-	-	-
10	31560.00	-	-	-	-	-	-	-
11	#36820.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

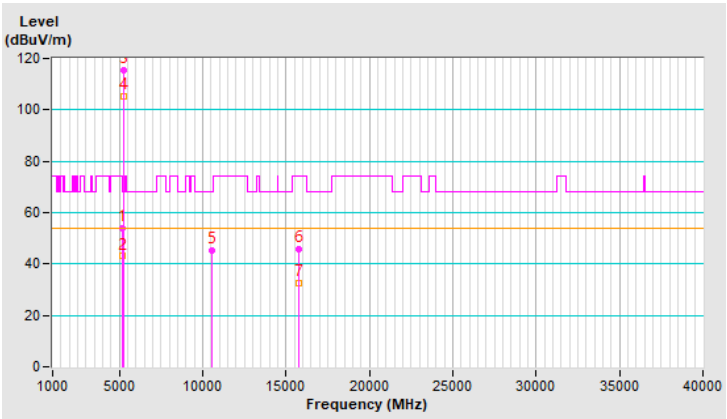


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 60：5.3 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	71%RH
測 試 日 期 ：	109 年 2 月 28 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5300.00	118.7 PK			1.62 H	40	116.3	2.4
2	*5300.00	108.4 AV			1.62 H	40	106.0	2.4
3	5350.00	65.5 PK	74.0	-8.5	1.62 H	40	62.9	2.6
4	5350.00	47.8 AV	54.0	-6.2	1.62 H	40	45.2	2.6
5	10600.00	45.9 PK	74.0	-28.1	3.68 H	232	33.5	12.4
6	10600.00	32.6 AV	54.0	-21.4	3.68 H	232	20.2	12.4
7	15900.00	47.9 PK	74.0	-26.1	1.58 H	154	35.8	12.1
8	15900.00	34.4 AV	54.0	-19.6	1.58 H	154	22.3	12.1
9	21200.00	-	-	-	-	-	-	-
10	#26500.00	-	-	-	-	-	-	-
11	31800.00	-	-	-	-	-	-	-
12	#37100.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

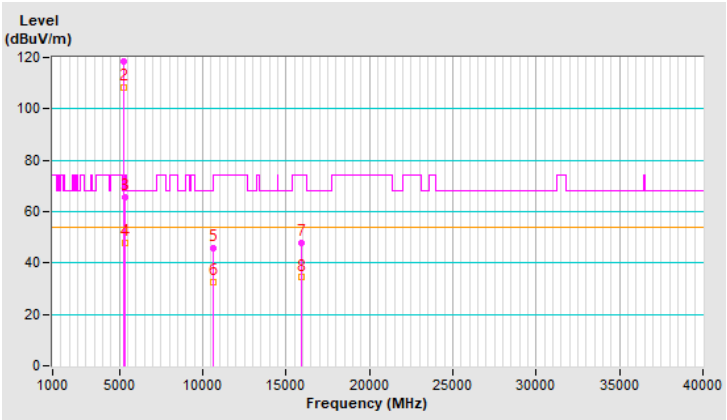


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 60：5.3 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	71%RH
測 試 日 期 ：	109 年 2 月 28 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5300.00	116.1 PK			2.68 V	107	113.7	2.4
2	*5300.00	106.0 AV			2.68 V	107	103.6	2.4
3	5350.00	64.2 PK	74.0	-9.8	2.68 V	107	61.6	2.6
4	5350.00	46.1 AV	54.0	-7.9	2.68 V	107	43.5	2.6
5	10600.00	45.4 PK	74.0	-28.6	3.05 V	209	33.0	12.4
6	10600.00	32.3 AV	54.0	-21.7	3.05 V	209	19.9	12.4
7	15900.00	45.5 PK	74.0	-28.5	3.61 V	173	33.4	12.1
8	15900.00	32.4 AV	54.0	-21.6	3.61 V	173	20.3	12.1
9	21200.00	-	-	-	-	-	-	-
10	#26500.00	-	-	-	-	-	-	-
11	31800.00	-	-	-	-	-	-	-
12	#37100.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

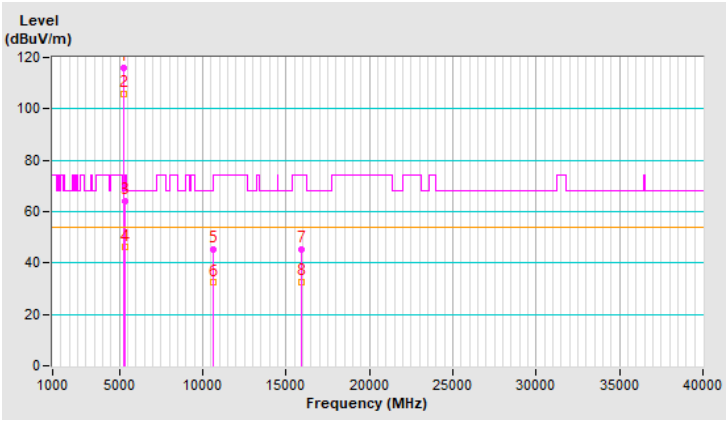


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 64：5.32 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	71%RH
測 試 日 期 ：	109 年 2 月 28 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5320.00	115.1 PK			1.71 H	54	112.6	2.5
2	*5320.00	104.0 AV			1.71 H	54	101.5	2.5
3	5350.00	71.2 PK	74.0	-2.8	1.71 H	54	68.6	2.6
4	5350.00	53.7 AV	54.0	-0.3	1.71 H	54	51.1	2.6
5	10640.00	45.4 PK	74.0	-28.6	3.60 H	229	33.0	12.4
6	10640.00	32.3 AV	54.0	-21.7	3.60 H	229	19.9	12.4
7	15960.00	48.2 PK	74.0	-25.8	1.56 H	171	35.8	12.4
8	15960.00	35.2 AV	54.0	-18.8	1.56 H	171	22.8	12.4
9	21280.00	-	-	-	-	-	-	-
10	#26600.00	-	-	-	-	-	-	-
11	#31920.00	-	-	-	-	-	-	-
12	#37240.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

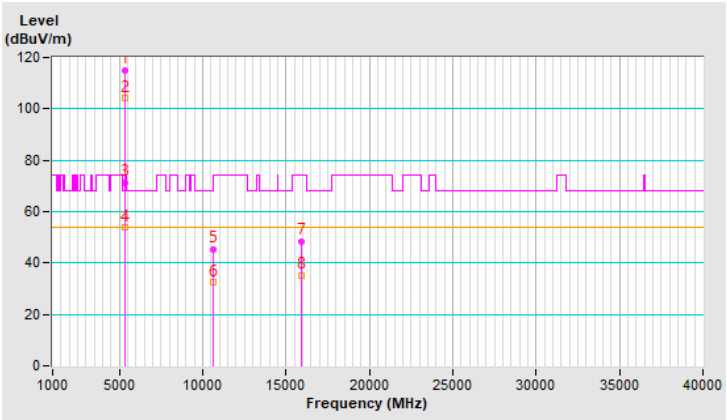


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 64：5.32 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	71%RH
測 試 日 期 ：	109 年 2 月 28 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5320.00	112.1 PK			2.68 V	99	109.6	2.5
2	*5320.00	100.9 AV			2.68 V	99	98.4	2.5
3	5350.00	65.3 PK	74.0	-8.7	2.68 V	99	62.7	2.6
4	5350.00	50.5 AV	54.0	-3.5	2.68 V	99	47.9	2.6
5	10640.00	45.3 PK	74.0	-28.7	3.12 V	224	32.9	12.4
6	10640.00	32.2 AV	54.0	-21.8	3.12 V	224	19.8	12.4
7	15960.00	45.3 PK	74.0	-28.7	3.58 V	163	32.9	12.4
8	15960.00	31.8 AV	54.0	-22.2	3.58 V	163	19.4	12.4
9	21280.00	-	-	-	-	-	-	-
10	#26600.00	-	-	-	-	-	-	-
11	#31920.00	-	-	-	-	-	-	-
12	#37240.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

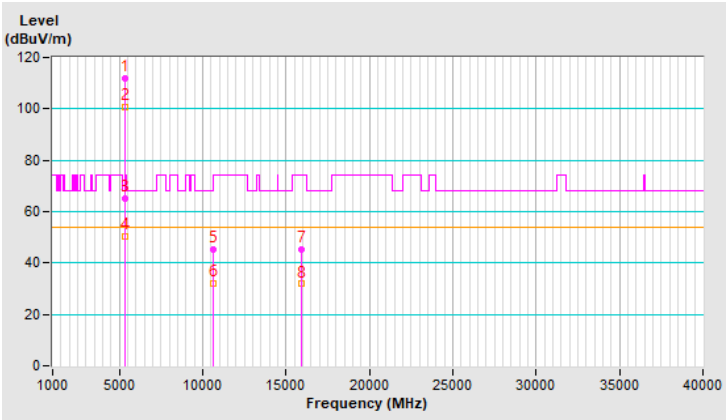


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 100：5.5 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	71%RH
測 試 日 期 ：	109 年 2 月 28 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	54.7 PK	74.0	-19.3	1.58 H	52	51.7	3.0
2	5460.00	42.3 AV	54.0	-11.7	1.58 H	52	39.3	3.0
3	#5470.00	67.7 PK	68.2	-0.5	1.58 H	52	64.6	3.1
4	*5500.00	113.9 PK			1.58 H	52	110.8	3.1
5	*5500.00	102.1 AV			1.58 H	52	99.0	3.1
6	11000.00	45.8 PK	74.0	-28.2	3.68 H	228	33.2	12.6
7	11000.00	32.3 AV	54.0	-21.7	3.68 H	228	19.7	12.6
8	#16500.00	48.2 PK	68.2	-20.0	1.56 H	155	34.6	13.6
9	#22000.00	-	-	-	-	-	-	-
10	#27500.00	-	-	-	-	-	-	-
11	#33000.00	-	-	-	-	-	-	-
12	#38500.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

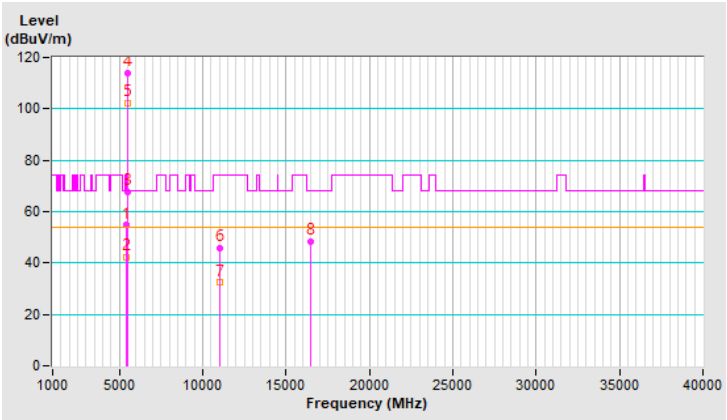


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 100：5.5 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	71%RH
測 試 日 期 ：	109 年 2 月 28 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	54.4 PK	74.0	-19.6	2.70 V	87	51.4	3.0
2	5460.00	41.9 AV	54.0	-12.1	2.70 V	87	38.9	3.0
3	#5470.00	65.7 PK	68.2	-2.5	2.70 V	87	62.6	3.1
4	*5500.00	111.2 PK			2.70 V	87	108.1	3.1
5	*5500.00	99.2 AV			2.70 V	87	96.1	3.1
6	11000.00	45.1 PK	74.0	-28.9	3.15 V	204	32.5	12.6
7	11000.00	32.1 AV	54.0	-21.9	3.15 V	204	19.5	12.6
8	#16500.00	45.5 PK	68.2	-22.7	3.59 V	159	31.9	13.6
9	#22000.00	-	-	-	-	-	-	-
10	#27500.00	-	-	-	-	-	-	-
11	#33000.00	-	-	-	-	-	-	-
12	#38500.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

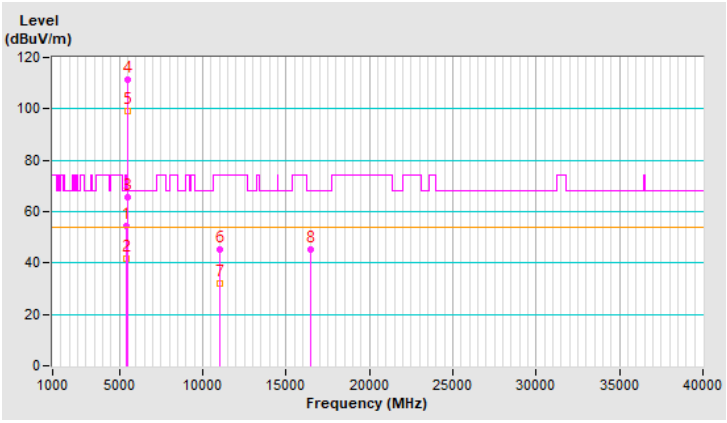


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 116：5.58 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	71%RH
測 試 日 期 ：	109 年 2 月 28 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5580.00	118.7 PK			1.55 H	47	115.7	3.0
2	*5580.00	108.2 AV			1.55 H	47	105.2	3.0
3	11160.00	46.4 PK	74.0	-27.6	3.65 H	217	34.0	12.4
4	11160.00	33.2 AV	54.0	-20.8	3.65 H	217	20.8	12.4
5	#16740.00	48.3 PK	68.2	-19.9	1.53 H	145	33.5	14.8
6	22320.00	-	-	-	-	-	-	-
7	#27900.00	-	-	-	-	-	-	-
8	#33480.00	-	-	-	-	-	-	-
9	39060.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

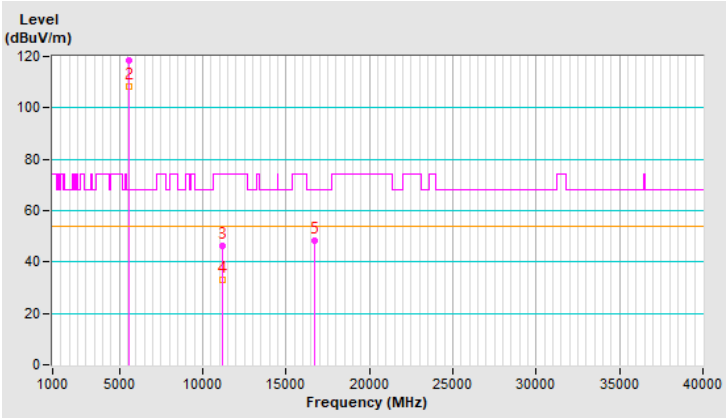


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 116：5.58 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	71%RH
測 試 日 期 ：	109 年 2 月 28 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5580.00	115.9 PK			2.68 V	87	112.9	3.0
2	*5580.00	105.8 AV			2.68 V	87	102.8	3.0
3	11160.00	45.5 PK	74.0	-28.5	3.06 V	201	33.1	12.4
4	11160.00	32.6 AV	54.0	-21.4	3.06 V	201	20.2	12.4
5	#16740.00	45.3 PK	68.2	-22.9	3.58 V	158	30.5	14.8
6	22320.00	-	-	-	-	-	-	-
7	#27900.00	-	-	-	-	-	-	-
8	#33480.00	-	-	-	-	-	-	-
9	39060.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

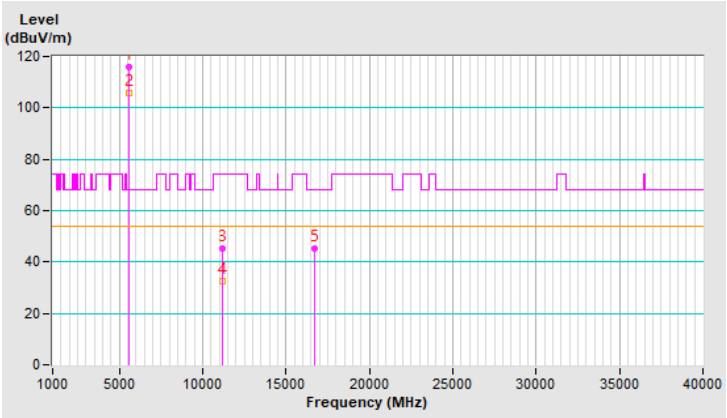


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 140：5.7 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	71%RH
測 試 日 期 ：	109 年 2 月 28 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5700.00	111.9 PK			1.52 H	54	108.7	3.2
2	*5700.00	100.6 AV			1.52 H	54	97.4	3.2
3	#5725.00	67.7 PK	68.2	-0.5	1.52 H	54	64.4	3.3
4	11400.00	45.8 PK	74.0	-28.2	3.58 H	218	32.8	13.0
5	11400.00	32.6 AV	54.0	-21.4	3.58 H	218	19.6	13.0
6	#17100.00	48.2 PK	68.2	-20.0	1.55 H	173	31.9	16.3
7	22800.00	-	-	-	-	-	-	-
8	#28500.00	-	-	-	-	-	-	-
9	#34200.00	-	-	-	-	-	-	-
10	39900.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

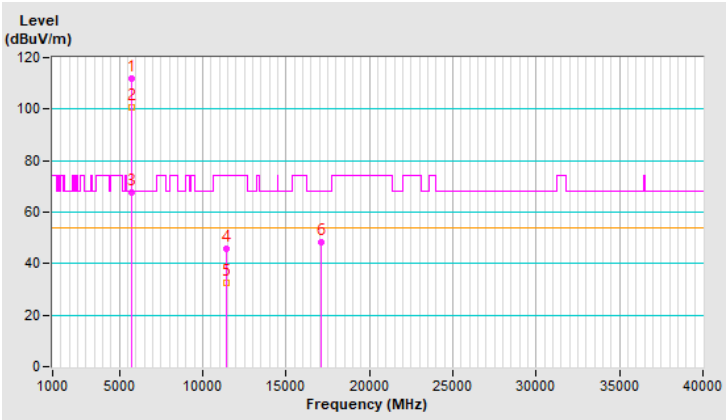


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 140：5.7 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	71%RH
測 試 日 期 ：	109 年 2 月 28 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5700.00	111.2 PK			2.71 V	113	108.0	3.2
2	*5700.00	99.1 AV			2.71 V	113	95.9	3.2
3	#5725.00	65.9 PK	68.2	-2.3	2.71 V	113	62.6	3.3
4	11400.00	46.1 PK	74.0	-27.9	3.09 V	203	33.1	13.0
5	11400.00	32.6 AV	54.0	-21.4	3.09 V	203	19.6	13.0
6	#17100.00	46.0 PK	68.2	-22.2	3.57 V	174	29.7	16.3
7	22800.00	-	-	-	-	-	-	-
8	#28500.00	-	-	-	-	-	-	-
9	#34200.00	-	-	-	-	-	-	-
10	39900.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

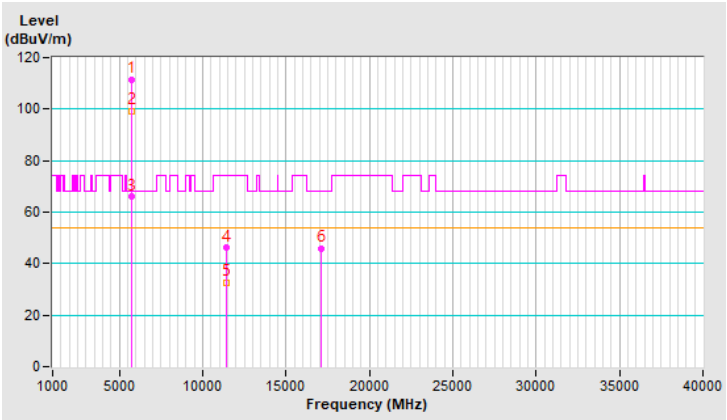


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 144：5.72 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	71%RH
測 試 日 期 ：	109 年 2 月 28 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	54.0 PK	74.0	-20.0	1.62 H	55	51.0	3.0
2	5460.00	40.1 AV	54.0	-13.9	1.62 H	55	37.1	3.0
3	#5470.00	53.7 PK	68.2	-14.5	1.62 H	55	50.6	3.1
4	*5720.00	118.7 PK			1.62 H	55	115.5	3.2
5	*5720.00	108.4 AV			1.62 H	55	105.2	3.2
6	#5850.00	53.6 PK	68.2	-14.6	1.62 H	55	49.9	3.7
7	#7160.00	48.0 PK	68.2	-20.2	1.63 H	168	39.5	8.5
8	11440.00	46.0 PK	74.0	-28.0	3.58 H	212	33.2	12.8
9	11440.00	32.5 AV	54.0	-21.5	3.58 H	212	19.7	12.8
10	#17160.00	-	-	-	-	-	-	-
11	22880.00	-	-	-	-	-	-	-
12	#28600.00	-	-	-	-	-	-	-
13	#34320.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

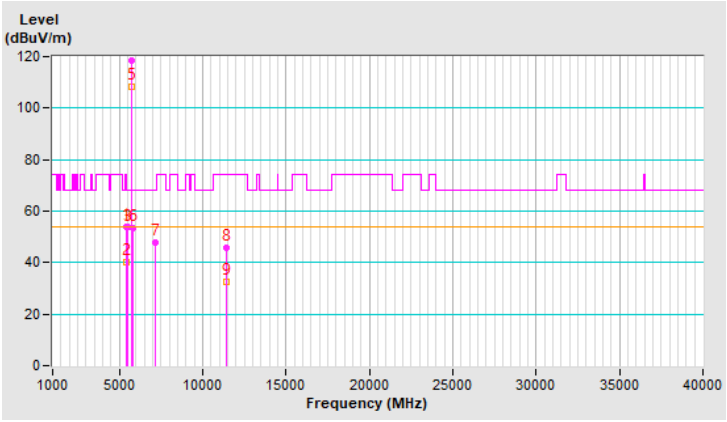


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 144：5.72 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	71%RH
測 試 日 期 ：	109 年 2 月 28 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	54.3 PK	74.0	-19.7	2.74 V	89	51.3	3.0
2	5460.00	39.8 AV	54.0	-14.2	2.74 V	89	36.8	3.0
3	#5470.00	53.4 PK	68.2	-14.8	2.74 V	89	50.3	3.1
4	*5720.00	116.0 PK			2.74 V	89	112.8	3.2
5	*5720.00	105.6 AV			2.74 V	89	102.4	3.2
6	#5850.00	53.7 PK	68.2	-14.5	2.74 V	89	50.0	3.7
7	11440.00	45.9 PK	74.0	-28.1	3.16 V	205	33.1	12.8
8	11440.00	32.8 AV	54.0	-21.2	3.16 V	205	20.0	12.8
9	#17160.00	46.2 PK	68.2	-22.0	3.59 V	155	29.6	16.6
10	22880.00	-	-	-	-	-	-	-
11	#28600.00	-	-	-	-	-	-	-
12	#34320.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

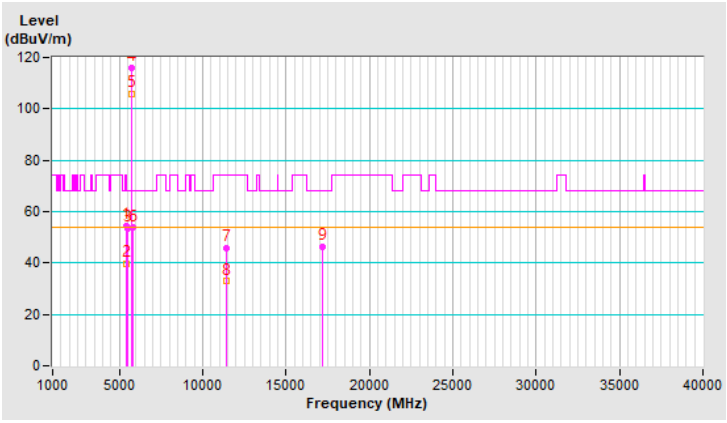


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 149：5.745 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	23℃	量 測 場 地 濕 度 ：	67%RH
測 試 日 期 ：	109 年 1 月 22 日	測 試 者 ：	柯其宗

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5745.00	120.8 PK			1.53 H	43	117.5	3.3
2	*5745.00	109.4 AV			1.53 H	43	106.1	3.3
3	11490.00	43.3 PK	74.0	-30.7	2.15 H	79	30.7	12.6
4	11490.00	32.7 AV	54.0	-21.3	2.15 H	79	20.1	12.6
5	#17235.00	53.2 PK	68.2	-15.0	1.26 H	101	36.4	16.8
6	22980.00	-	-	-	-	-	-	-
7	#28725.00	-	-	-	-	-	-	-
8	#34470.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

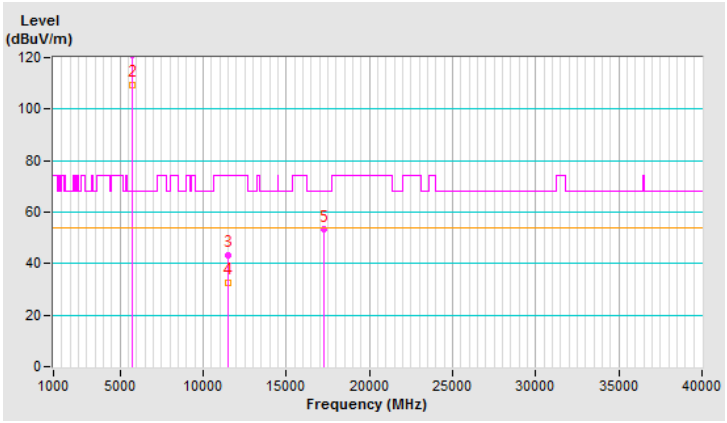


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 149：5.745 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	23℃	量 測 場 地 濕 度 ：	67%RH
測 試 日 期 ：	109 年 1 月 22 日	測 試 者 ：	柯其宗

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5745.00	119.7 PK			3.95 V	347	116.4	3.3
2	*5745.00	107.0 AV			3.95 V	347	103.7	3.3
3	11490.00	42.8 PK	74.0	-31.2	1.02 V	109	30.2	12.6
4	11490.00	32.5 AV	54.0	-21.5	1.02 V	109	19.9	12.6
5	#17235.00	56.1 PK	68.2	-12.1	2.10 V	76	39.3	16.8
6	22980.00	-	-	-	-	-	-	-
7	#28725.00	-	-	-	-	-	-	-
8	#34470.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

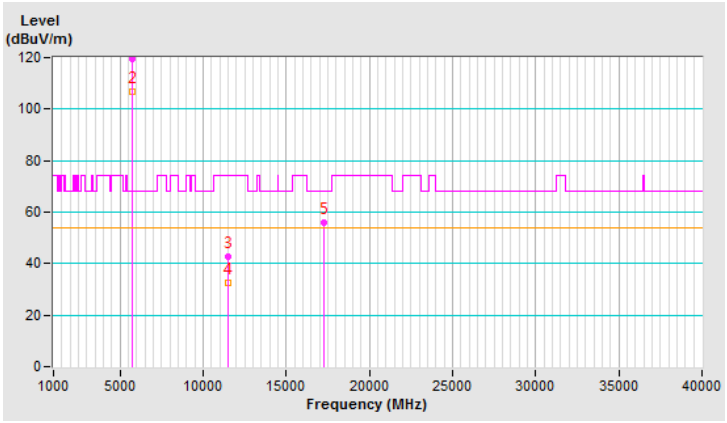


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 157：5.785 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	23℃	量 測 場 地 濕 度 ：	67%RH
測 試 日 期 ：	109 年 1 月 22 日	測 試 者 ：	柯其宗

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5785.00	119.9 PK			1.56 H	42	116.5	3.4
2	*5785.00	108.9 AV			1.56 H	42	105.5	3.4
3	11570.00	43.1 PK	74.0	-30.9	2.23 H	89	30.9	12.2
4	11570.00	32.8 AV	54.0	-21.2	2.23 H	89	20.6	12.2
5	#17355.00	53.4 PK	68.2	-14.8	1.22 H	85	36.8	16.6
6	#23140.00	-	-	-	-	-	-	-
7	#28925.00	-	-	-	-	-	-	-
8	#34710.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

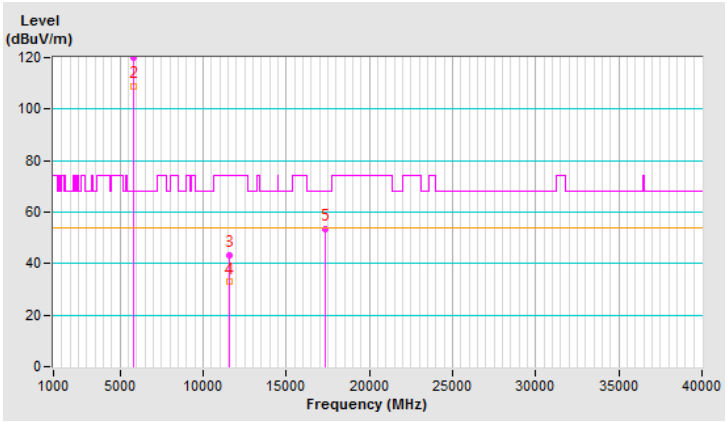


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 157：5.785 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	23℃	量 測 場 地 濕 度 ：	67%RH
測 試 日 期 ：	109 年 1 月 22 日	測 試 者 ：	柯其宗

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5785.00	119.2 PK			3.87 V	350	115.8	3.4
2	*5785.00	106.8 AV			3.87 V	350	103.4	3.4
3	11570.00	42.8 PK	74.0	-31.2	1.03 V	106	30.6	12.2
4	11570.00	32.7 AV	54.0	-21.3	1.03 V	106	20.5	12.2
5	#17355.00	55.9 PK	68.2	-12.3	2.08 V	96	39.3	16.6
6	#23140.00	-	-	-	-	-	-	-
7	#28925.00	-	-	-	-	-	-	-
8	#34710.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

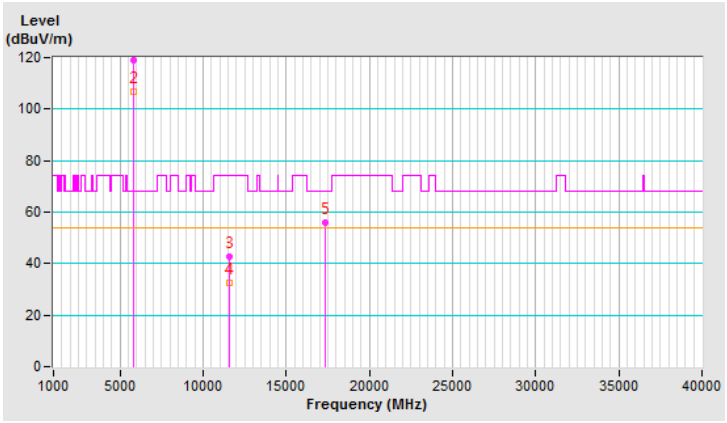


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 165：5.825 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	23℃	量 測 場 地 濕 度 ：	67%RH
測 試 日 期 ：	109 年 1 月 22 日	測 試 者 ：	柯其宗

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5825.00	121.3 PK			1.52 H	41	117.7	3.6
2	*5825.00	109.5 AV			1.52 H	41	105.9	3.6
3	11650.00	43.1 PK	74.0	-30.9	2.17 H	76	30.7	12.4
4	11650.00	32.4 AV	54.0	-21.6	2.17 H	76	20.0	12.4
5	#17475.00	53.6 PK	68.2	-14.6	1.28 H	97	36.6	17.0
6	#23300.00	-	-	-	-	-	-	-
7	#29125.00	-	-	-	-	-	-	-
8	#34950.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

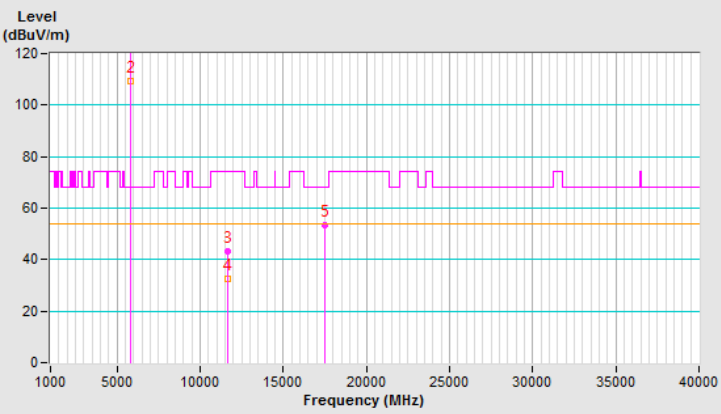


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 165：5.825 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	23℃	量 測 場 地 濕 度 ：	67%RH
測 試 日 期 ：	109 年 1 月 22 日	測 試 者 ：	柯其宗

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5825.00	119.9 PK			3.86 V	353	116.3	3.6
2	*5825.00	107.1 AV			3.86 V	353	103.5	3.6
3	11650.00	43.1 PK	74.0	-30.9	1.05 V	104	30.7	12.4
4	11650.00	33.2 AV	54.0	-20.8	1.05 V	104	20.8	12.4
5	#17475.00	55.9 PK	68.2	-12.3	2.08 V	92	38.9	17.0
6	#23300.00	-	-	-	-	-	-	-
7	#29125.00	-	-	-	-	-	-	-
8	#34950.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

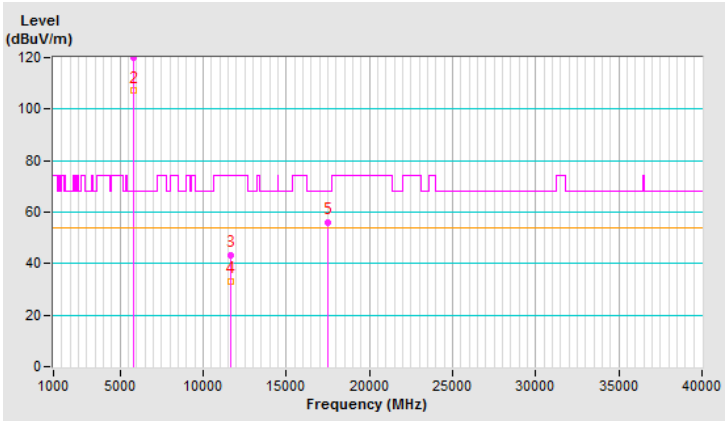


802.11ax (HE40)

操作模式：	發射	調變技術：	OFDMA
基本波頻率：	CH 38：5.19 GHz	測試儀器：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=2kHz
量測場地溫度：	23℃	量測場地濕度：	67%RH
測試日期：	109 年 1 月 22 日	測試者：	柯其宗

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	70.4 PK	74.0	-3.6	2.13 H	53	67.4	3.0
2	5150.00	53.8 AV	54.0	-0.2	2.13 H	53	50.8	3.0
3	*5190.00	110.9 PK			2.13 H	53	108.0	2.9
4	*5190.00	100.4 AV			2.13 H	53	97.5	2.9
5	#10380.00	45.7 PK	68.2	-22.5	2.24 H	78	33.5	12.2
6	15570.00	47.5 PK	74.0	-26.5	1.21 H	99	34.5	13.0
7	15570.00	35.5 AV	54.0	-18.5	1.21 H	99	22.5	13.0
8	20760.00	-	-	-	-	-	-	-
9	#25950.00	-	-	-	-	-	-	-
10	#31140.00	-	-	-	-	-	-	-
11	#36330.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

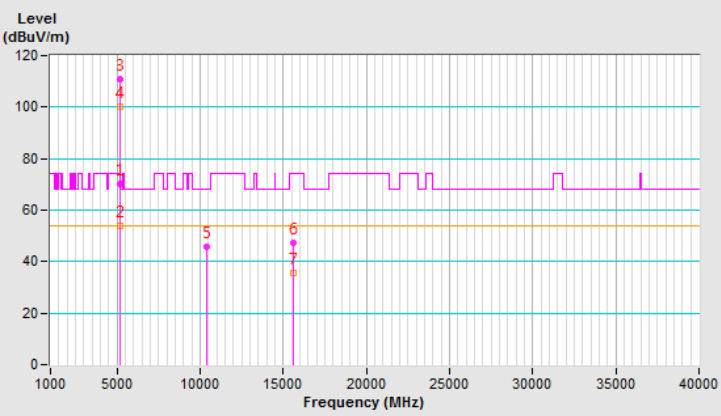


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 38：5.19 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=2kHz
量 測 場 地 溫 度 ：	23℃	量 測 場 地 濕 度 ：	67%RH
測 試 日 期 ：	109 年 1 月 22 日	測 試 者 ：	柯其宗

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	66.1 PK	74.0	-7.9	2.04 V	343	63.1	3.0
2	5150.00	47.7 AV	54.0	-6.3	2.04 V	343	44.7	3.0
3	*5190.00	109.2 PK			2.04 V	343	106.3	2.9
4	*5190.00	97.8 AV			2.04 V	343	94.9	2.9
5	#10380.00	45.5 PK	68.2	-22.7	1.06 V	88	33.3	12.2
6	15570.00	51.2 PK	74.0	-22.8	2.10 V	103	38.2	13.0
7	15570.00	37.1 AV	54.0	-16.9	2.10 V	103	24.1	13.0
8	20760.00	-	-	-	-	-	-	-
9	#25950.00	-	-	-	-	-	-	-
10	#31140.00	-	-	-	-	-	-	-
11	#36330.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

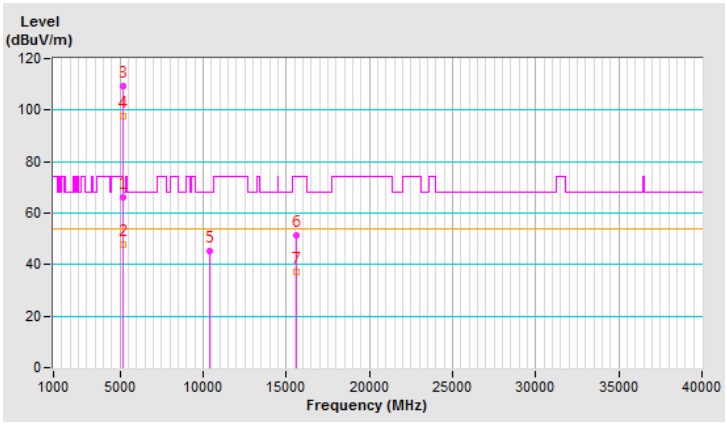


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 46：5.23 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=2kHz
量 測 場 地 溫 度 ：	23℃	量 測 場 地 濕 度 ：	67%RH
測 試 日 期 ：	109 年 1 月 22 日	測 試 者 ：	柯其宗

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5230.00	114.9 PK			2.17 H	51	112.3	2.6
2	*5230.00	104.1 AV			2.17 H	51	101.5	2.6
3	5350.00	67.6 PK	74.0	-6.4	2.17 H	51	65.0	2.6
4	5350.00	53.6 AV	54.0	-0.4	2.17 H	51	51.0	2.6
5	#10460.00	46.2 PK	68.2	-22.0	2.18 H	107	33.8	12.4
6	15690.00	47.9 PK	74.0	-26.1	1.20 H	81	35.5	12.4
7	15690.00	36.2 AV	54.0	-17.8	1.20 H	81	23.8	12.4
8	20920.00	-	-	-	-	-	-	-
9	#26150.00	-	-	-	-	-	-	-
10	31380.00	-	-	-	-	-	-	-
11	#36610.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

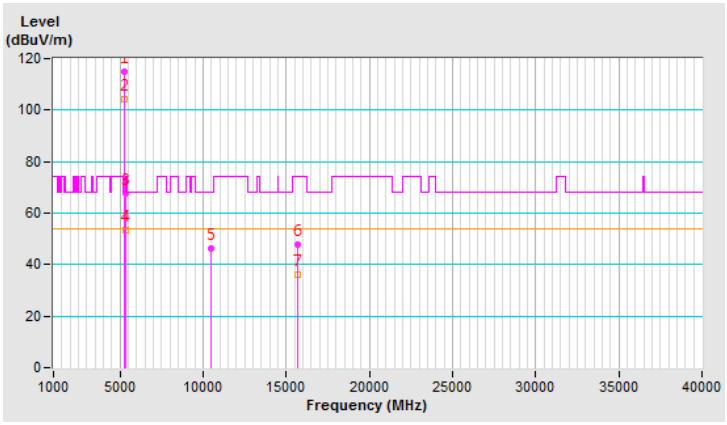


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 46：5.23 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=2kHz
量 測 場 地 溫 度 ：	23℃	量 測 場 地 濕 度 ：	67%RH
測 試 日 期 ：	109 年 1 月 22 日	測 試 者 ：	柯其宗

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5230.00	113.2 PK			2.18 V	337	110.6	2.6
2	*5230.00	101.7 AV			2.18 V	337	99.1	2.6
3	5350.00	65.4 PK	74.0	-8.6	2.18 V	337	62.8	2.6
4	5350.00	47.3 AV	54.0	-6.7	2.18 V	337	44.7	2.6
5	#10460.00	45.0 PK	68.2	-23.2	1.07 V	102	32.6	12.4
6	15690.00	52.8 PK	74.0	-21.2	2.02 V	79	40.4	12.4
7	15690.00	38.5 AV	54.0	-15.5	2.02 V	79	26.1	12.4
8	20920.00	-	-	-	-	-	-	-
9	#26150.00	-	-	-	-	-	-	-
10	31380.00	-	-	-	-	-	-	-
11	#36610.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

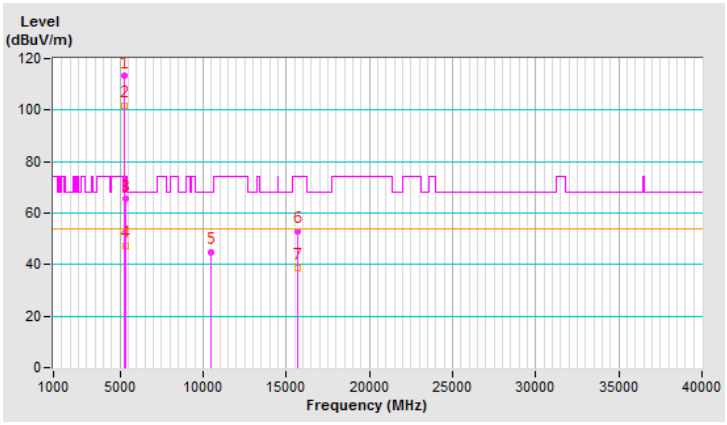


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 54：5.27 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=2kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	71%RH
測 試 日 期 ：	109 年 2 月 28 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	58.1 PK	74.0	-15.9	1.61 H	55	55.1	3.0
2	5150.00	45.3 AV	54.0	-8.7	1.61 H	55	42.3	3.0
3	*5270.00	116.0 PK			1.61 H	55	113.5	2.5
4	*5270.00	104.2 AV			1.61 H	55	101.7	2.5
5	5350.00	65.7 PK	74.0	-8.3	1.61 H	55	63.1	2.6
6	5350.00	50.2 AV	54.0	-3.8	1.61 H	55	47.6	2.6
7	#10540.00	45.9 PK	68.2	-22.3	3.60 H	226	33.3	12.6
8	15810.00	47.7 PK	74.0	-26.3	1.62 H	161	36.0	11.7
9	15810.00	34.5 AV	54.0	-19.5	1.62 H	161	22.8	11.7
10	21080.00	-	-	-	-	-	-	-
11	#26350.00	-	-	-	-	-	-	-
12	31620.00	-	-	-	-	-	-	-
13	#36890.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

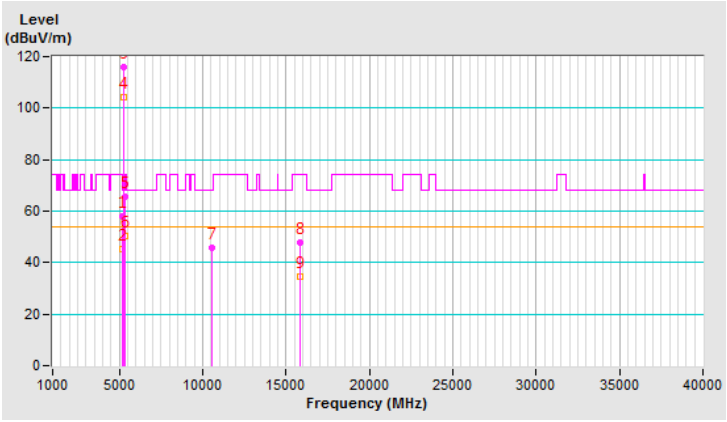


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 54：5.27 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=2kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	71%RH
測 試 日 期 ：	109 年 2 月 28 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	51.3 PK	74.0	-22.7	2.77 V	87	48.3	3.0
2	5150.00	42.0 AV	54.0	-12.0	2.77 V	87	39.0	3.0
3	*5270.00	112.6 PK			2.77 V	87	110.1	2.5
4	*5270.00	100.6 AV			2.77 V	87	98.1	2.5
5	5350.00	64.5 PK	74.0	-9.5	2.77 V	87	61.9	2.6
6	5350.00	48.7 AV	54.0	-5.3	2.77 V	87	46.1	2.6
7	#10540.00	45.8 PK	68.2	-22.4	3.07 V	210	33.2	12.6
8	15810.00	45.7 PK	74.0	-28.3	3.57 V	168	34.0	11.7
9	15810.00	32.5 AV	54.0	-21.5	3.57 V	168	20.8	11.7
10	21080.00	-	-	-	-	-	-	-
11	#26350.00	-	-	-	-	-	-	-
12	31620.00	-	-	-	-	-	-	-
13	#36890.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

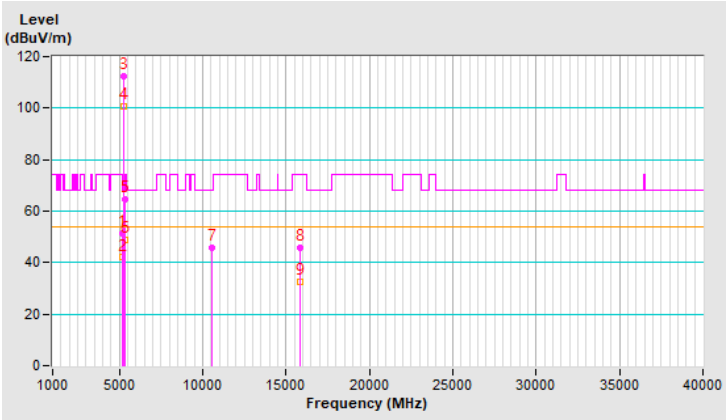


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 62：5.31 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=2kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	71%RH
測 試 日 期 ：	109 年 2 月 28 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5310.00	110.7 PK			1.59 H	49	108.3	2.4
2	*5310.00	99.5 AV			1.59 H	49	97.1	2.4
3	5350.00	69.6 PK	74.0	-4.4	1.59 H	49	67.0	2.6
4	5350.00	53.8 AV	54.0	-0.2	1.59 H	49	51.2	2.6
5	10620.00	46.0 PK	74.0	-28.0	3.63 H	218	33.6	12.4
6	10620.00	33.1 AV	54.0	-20.9	3.63 H	218	20.7	12.4
7	15930.00	47.6 PK	74.0	-26.4	1.55 H	154	35.4	12.2
8	15930.00	34.7 AV	54.0	-19.3	1.55 H	154	22.5	12.2
9	21240.00	-	-	-	-	-	-	-
10	#26550.00	-	-	-	-	-	-	-
11	#31860.00	-	-	-	-	-	-	-
12	#37170.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

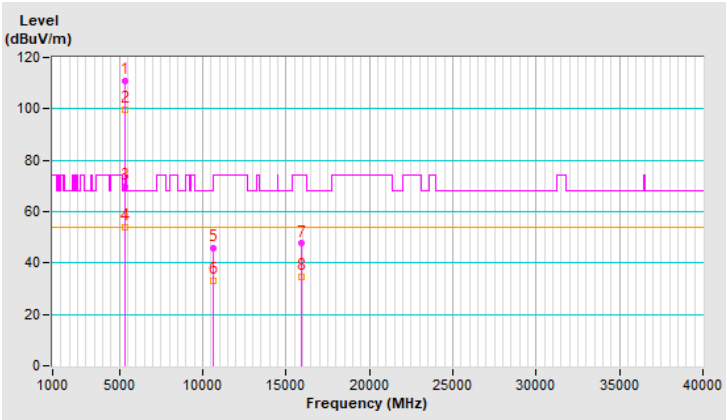


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 62：5.31 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=2kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	71%RH
測 試 日 期 ：	109 年 2 月 28 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5310.00	107.8 PK			2.76 V	87	105.4	2.4
2	*5310.00	96.3 AV			2.76 V	87	93.9	2.4
3	5350.00	63.6 PK	74.0	-10.4	2.76 V	87	61.0	2.6
4	5350.00	49.6 AV	54.0	-4.4	2.76 V	87	47.0	2.6
5	10620.00	45.9 PK	74.0	-28.1	3.14 V	202	33.5	12.4
6	10620.00	32.9 AV	54.0	-21.1	3.14 V	202	20.5	12.4
7	15930.00	45.3 PK	74.0	-28.7	3.56 V	160	33.1	12.2
8	15930.00	31.9 AV	54.0	-22.1	3.56 V	160	19.7	12.2
9	21240.00	-	-	-	-	-	-	-
10	#26550.00	-	-	-	-	-	-	-
11	#31860.00	-	-	-	-	-	-	-
12	#37170.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

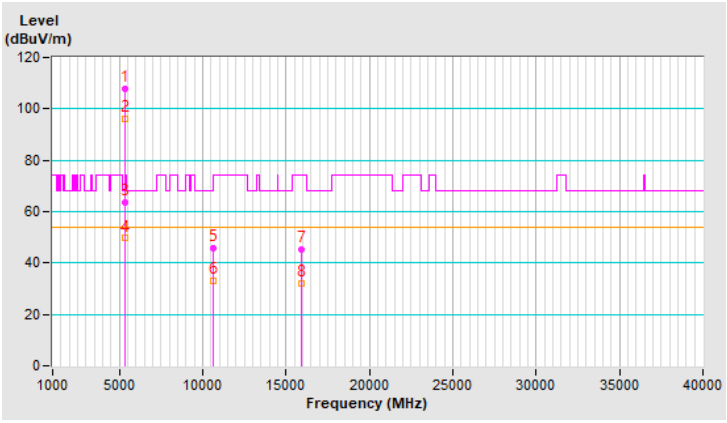


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 102：5.51 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=2kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	71%RH
測 試 日 期 ：	109 年 2 月 28 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	63.2 PK	74.0	-10.8	1.54 H	50	60.2	3.0
2	5460.00	46.1 AV	54.0	-7.9	1.54 H	50	43.1	3.0
3	#5470.00	67.8 PK	68.2	-0.4	1.54 H	50	64.7	3.1
4	*5510.00	110.6 PK			1.54 H	50	107.5	3.1
5	*5510.00	99.2 AV			1.54 H	50	96.1	3.1
6	11020.00	46.0 PK	74.0	-28.0	3.58 H	238	33.5	12.5
7	11020.00	33.0 AV	54.0	-21.0	3.58 H	238	20.5	12.5
8	#16530.00	47.9 PK	68.2	-20.3	1.58 H	161	34.0	13.9
9	22040.00	-	-	-	-	-	-	-
10	#27550.00	-	-	-	-	-	-	-
11	#33060.00	-	-	-	-	-	-	-
12	#38570.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

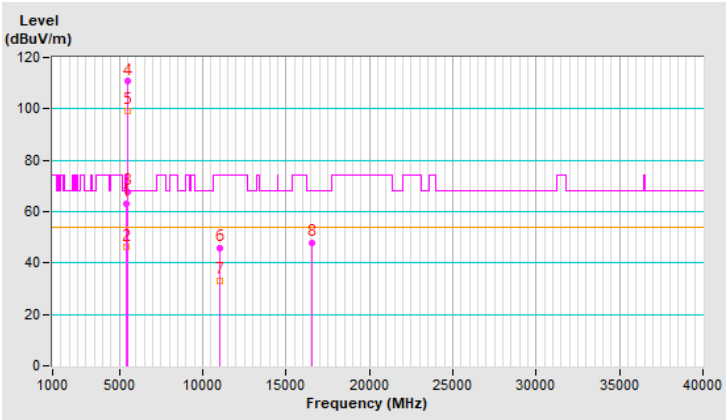


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 102：5.51 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=2kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	71%RH
測 試 日 期 ：	109 年 2 月 28 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	62.5 PK	74.0	-11.5	2.70 V	98	59.5	3.0
2	5460.00	45.2 AV	54.0	-8.8	2.70 V	98	42.2	3.0
3	#5470.00	65.9 PK	68.2	-2.3	2.70 V	98	62.8	3.1
4	*5510.00	107.9 PK			2.70 V	98	104.8	3.1
5	*5510.00	96.6 AV			2.70 V	98	93.5	3.1
6	11020.00	45.4 PK	74.0	-28.6	3.11 V	213	32.9	12.5
7	11020.00	32.1 AV	54.0	-21.9	3.11 V	213	19.6	12.5
8	#16530.00	45.1 PK	68.2	-23.1	3.58 V	152	31.2	13.9
9	22040.00	-	-	-	-	-	-	-
10	#27550.00	-	-	-	-	-	-	-
11	#33060.00	-	-	-	-	-	-	-
12	#38570.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

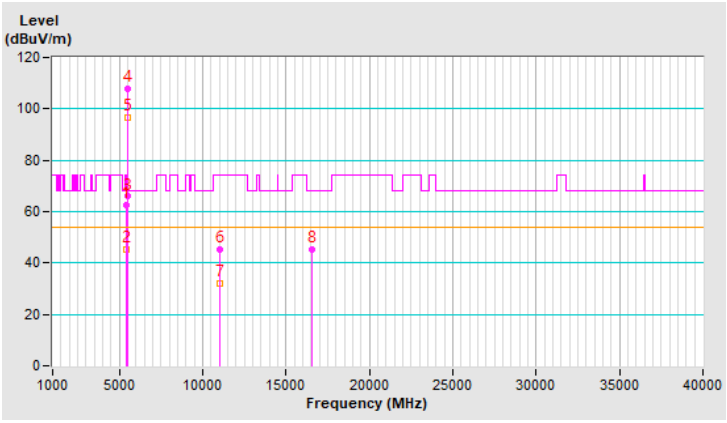


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 110：5.55 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=2kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	71%RH
測 試 日 期 ：	109 年 2 月 28 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5550.00	115.8 PK			1.65 H	61	112.8	3.0
2	*5550.00	104.1 AV			1.65 H	61	101.1	3.0
3	11100.00	45.9 PK	74.0	-28.1	3.66 H	216	33.6	12.3
4	11100.00	32.7 AV	54.0	-21.3	3.66 H	216	20.4	12.3
5	#16650.00	48.0 PK	68.2	-20.2	1.56 H	144	33.4	14.6
6	22200.00	-	-	-	-	-	-	-
7	#27750.00	-	-	-	-	-	-	-
8	#33300.00	-	-	-	-	-	-	-
9	38850.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

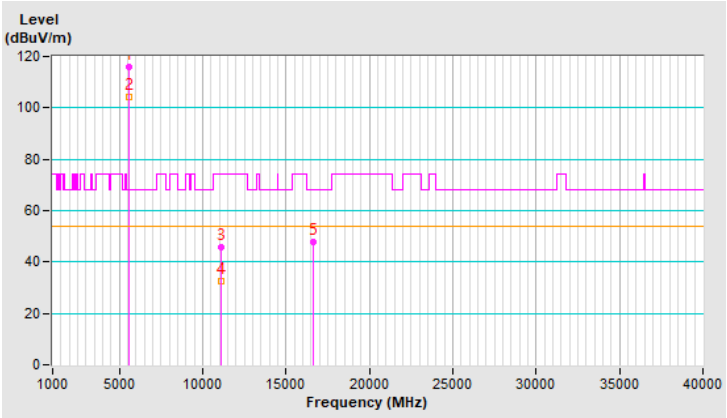


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 110：5.55 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=2kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	71%RH
測 試 日 期 ：	109 年 2 月 28 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5550.00	113.2 PK			2.69 V	111	110.2	3.0
2	*5550.00	101.0 AV			2.69 V	111	98.0	3.0
3	11100.00	45.0 PK	74.0	-29.0	3.12 V	223	32.7	12.3
4	11100.00	32.0 AV	54.0	-22.0	3.12 V	223	19.7	12.3
5	#16650.00	45.5 PK	68.2	-22.7	3.62 V	154	30.9	14.6
6	22200.00	-	-	-	-	-	-	-
7	#27750.00	-	-	-	-	-	-	-
8	#33300.00	-	-	-	-	-	-	-
9	38850.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

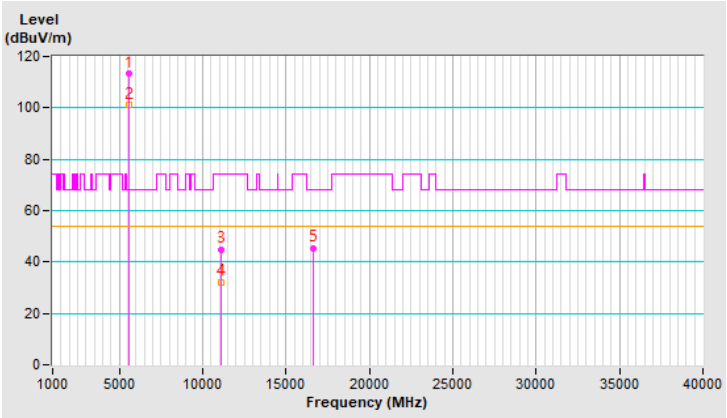


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 134：5.67 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=2kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	71%RH
測 試 日 期 ：	109 年 2 月 28 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5670.00	112.2 PK			1.56 H	42	109.0	3.2
2	*5670.00	100.3 AV			1.56 H	42	97.1	3.2
3	#5725.00	68.0 PK	68.2	-0.2	1.56 H	42	64.7	3.3
4	11340.00	45.3 PK	74.0	-28.7	3.67 H	210	32.4	12.9
5	11340.00	32.4 AV	54.0	-21.6	3.67 H	210	19.5	12.9
6	#17010.00	47.3 PK	68.2	-20.9	1.54 H	172	31.4	15.9
7	22680.00	-	-	-	-	-	-	-
8	#28350.00	-	-	-	-	-	-	-
9	#34020.00	-	-	-	-	-	-	-
10	39690.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

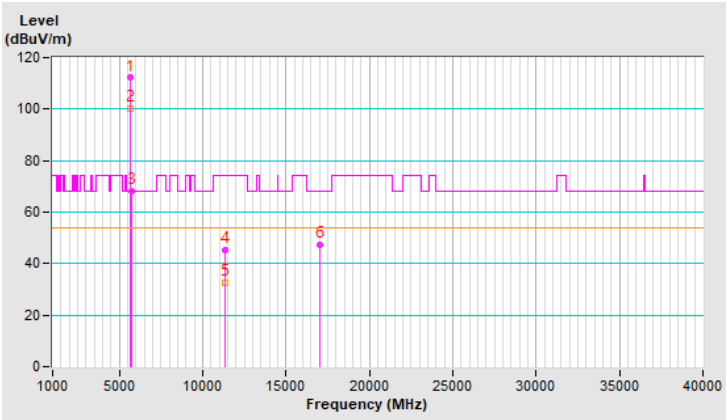


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 134：5.67 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=2kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	71%RH
測 試 日 期 ：	109 年 2 月 28 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5670.00	109.3 PK			2.77 V	108	106.1	3.2
2	*5670.00	97.0 AV			2.77 V	108	93.8	3.2
3	#5725.00	66.4 PK	68.2	-1.8	2.77 V	108	63.1	3.3
4	11340.00	45.5 PK	74.0	-28.5	3.10 V	221	32.6	12.9
5	11340.00	32.4 AV	54.0	-21.6	3.10 V	221	19.5	12.9
6	#17010.00	45.4 PK	68.2	-22.8	3.54 V	167	29.5	15.9
7	22680.00	-	-	-	-	-	-	-
8	#28350.00	-	-	-	-	-	-	-
9	#34020.00	-	-	-	-	-	-	-
10	39690.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

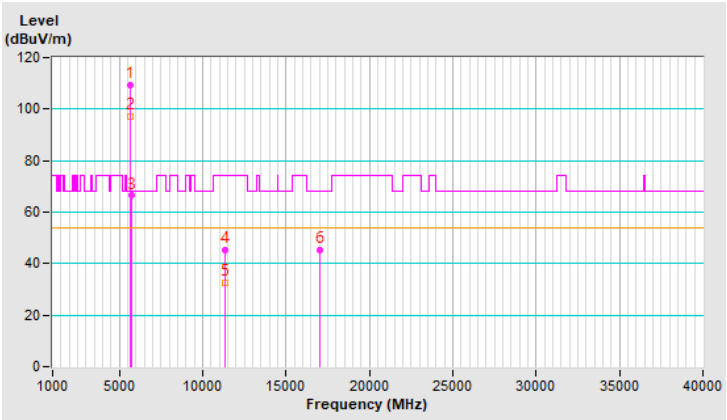


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 142 : 5.71 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=2kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	71%RH
測 試 日 期 ：	109 年 2 月 28 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	52.6 PK	74.0	-21.4	1.62 H	47	49.6	3.0
2	5460.00	40.0 AV	54.0	-14.0	1.62 H	47	37.0	3.0
3	#5470.00	53.6 PK	68.2	-14.6	1.62 H	47	50.5	3.1
4	*5710.00	116.1 PK			1.62 H	47	112.9	3.2
5	*5710.00	104.1 AV			1.62 H	47	100.9	3.2
6	#5850.00	52.9 PK	68.2	-15.3	1.62 H	47	49.2	3.7
7	11420.00	46.2 PK	74.0	-27.8	3.67 H	217	33.3	12.9
8	11420.00	33.2 AV	54.0	-20.8	3.67 H	217	20.3	12.9
9	#17130.00	48.0 PK	68.2	-20.2	1.61 H	144	31.6	16.4
10	22840.00	-	-	-	-	-	-	-
11	#28550.00	-	-	-	-	-	-	-
12	#34260.00	-	-	-	-	-	-	-
13	39970.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

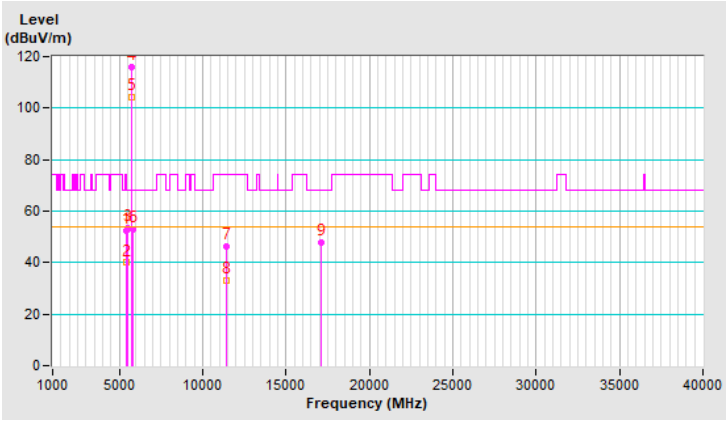


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 142 : 5.71 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=2kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	71%RH
測 試 日 期 ：	109 年 2 月 28 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	52.2 PK	74.0	-21.8	2.77 V	112	49.2	3.0
2	5460.00	39.5 AV	54.0	-14.5	2.77 V	112	36.5	3.0
3	#5470.00	53.2 PK	68.2	-15.0	2.77 V	112	50.1	3.1
4	*5710.00	112.7 PK			2.77 V	112	109.5	3.2
5	*5710.00	100.6 AV			2.77 V	112	97.4	3.2
6	#5850.00	52.7 PK	68.2	-15.5	2.77 V	112	49.0	3.7
7	11420.00	45.6 PK	74.0	-28.4	3.12 V	227	32.7	12.9
8	11420.00	32.4 AV	54.0	-21.6	3.12 V	227	19.5	12.9
9	#17130.00	45.9 PK	68.2	-22.3	3.54 V	175	29.5	16.4
10	22840.00	-	-	-	-	-	-	-
11	#28550.00	-	-	-	-	-	-	-
12	#34260.00	-	-	-	-	-	-	-
13	39970.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

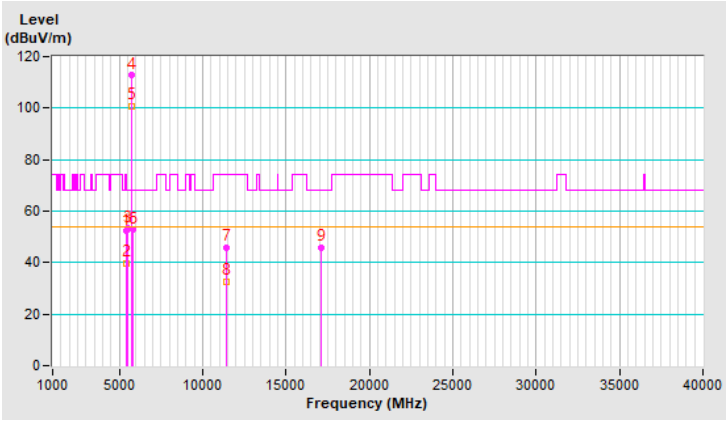


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 151：5.755 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=2kHz
量 測 場 地 溫 度 ：	23℃	量 測 場 地 濕 度 ：	67%RH
測 試 日 期 ：	109 年 1 月 22 日	測 試 者 ：	柯其宗

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5755.00	117.5 PK			1.76 H	59	114.2	3.3
2	*5755.00	105.5 AV			1.76 H	59	102.2	3.3
3	11510.00	43.3 PK	74.0	-30.7	2.25 H	92	30.8	12.5
4	11510.00	32.6 AV	54.0	-21.4	2.25 H	92	20.1	12.5
5	#17265.00	53.6 PK	68.2	-14.6	1.29 H	93	37.0	16.6
6	23020.00	-	-	-	-	-	-	-
7	#28775.00	-	-	-	-	-	-	-
8	#34530.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

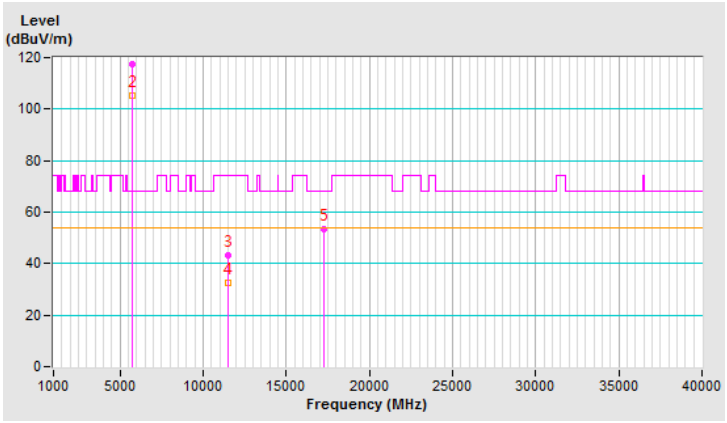


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 151：5.755 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=2kHz
量 測 場 地 溫 度 ：	23℃	量 測 場 地 濕 度 ：	67%RH
測 試 日 期 ：	109 年 1 月 22 日	測 試 者 ：	柯其宗

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5755.00	117.2 PK			3.90 V	352	113.9	3.3
2	*5755.00	104.1 AV			3.90 V	352	100.8	3.3
3	11510.00	43.9 PK	74.0	-30.1	1.09 V	103	31.4	12.5
4	11510.00	33.3 AV	54.0	-20.7	1.09 V	103	20.8	12.5
5	#17265.00	54.5 PK	68.2	-13.7	2.03 V	96	37.9	16.6
6	23020.00	-	-	-	-	-	-	-
7	#28775.00	-	-	-	-	-	-	-
8	#34530.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

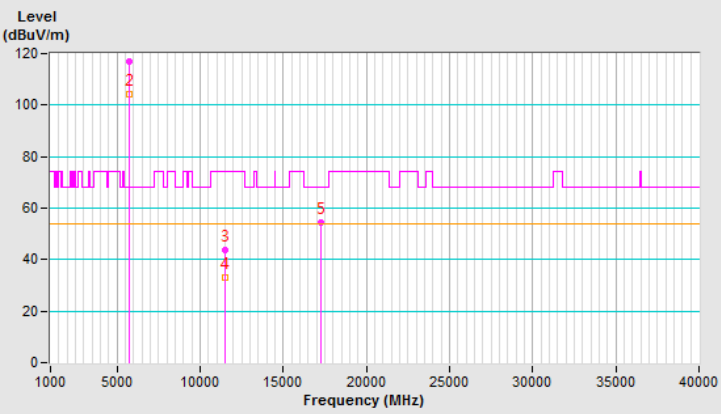


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 159：5.795 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=2kHz
量 測 場 地 溫 度 ：	23℃	量 測 場 地 濕 度 ：	67%RH
測 試 日 期 ：	109 年 1 月 22 日	測 試 者 ：	柯其宗

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5795.00	118.2 PK			1.73 H	65	114.7	3.5
2	*5795.00	105.7 AV			1.73 H	65	102.2	3.5
3	11590.00	42.7 PK	74.0	-31.3	2.14 H	92	30.4	12.3
4	11590.00	32.4 AV	54.0	-21.6	2.14 H	92	20.1	12.3
5	#17385.00	53.6 PK	68.2	-14.6	1.28 H	96	37.1	16.5
6	#23180.00	-	-	-	-	-	-	-
7	#28975.00	-	-	-	-	-	-	-
8	#34770.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

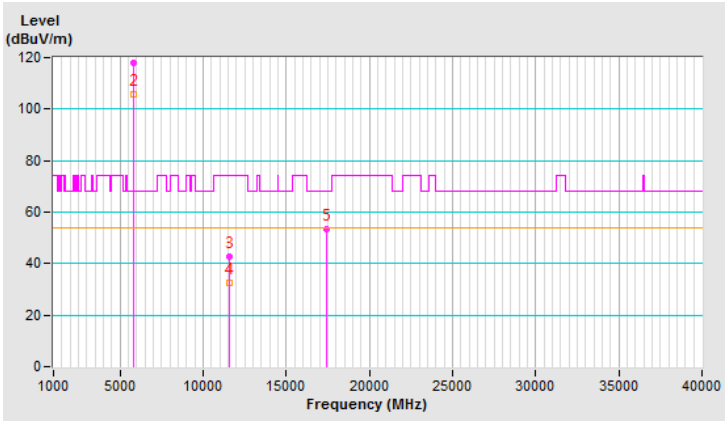


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 159：5.795 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=2kHz
量 測 場 地 溫 度 ：	23℃	量 測 場 地 濕 度 ：	67%RH
測 試 日 期 ：	109 年 1 月 22 日	測 試 者 ：	柯其宗

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5795.00	117.5 PK			3.89 V	353	114.0	3.5
2	*5795.00	104.3 AV			3.89 V	353	100.8	3.5
3	11590.00	43.5 PK	74.0	-30.5	1.06 V	127	31.2	12.3
4	11590.00	33.1 AV	54.0	-20.9	1.06 V	127	20.8	12.3
5	#17385.00	54.5 PK	68.2	-13.7	2.10 V	103	38.0	16.5
6	#23180.00	-	-	-	-	-	-	-
7	#28975.00	-	-	-	-	-	-	-
8	#34770.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

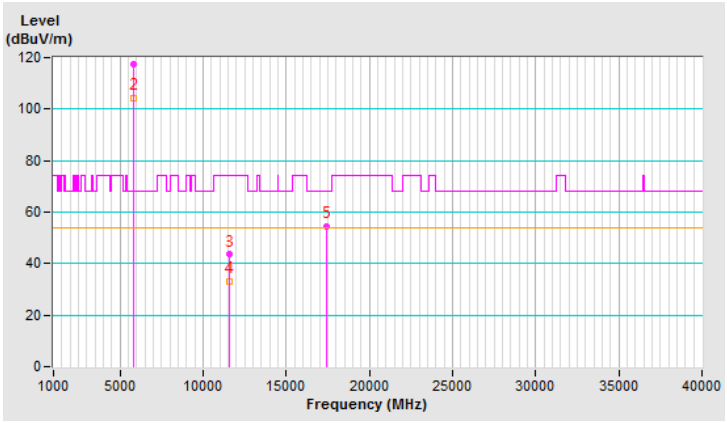


802.11ax (HE80)

操作模式：	發射	調變技術：	OFDMA
基本波頻率：	CH 42：5.21 GHz	測試儀器：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=3kHz
量測場地溫度：	23℃	量測場地濕度：	67%RH
測試日期：	109 年 1 月 22 日	測試者：	柯其宗

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	66.7 PK	74.0	-7.3	1.78 H	64	63.7	3.0
2	5150.00	53.7 AV	54.0	-0.3	1.78 H	64	50.7	3.0
3	*5210.00	109.2 PK			1.78 H	64	106.5	2.7
4	*5210.00	95.9 AV			1.78 H	64	93.2	2.7
5	5350.00	52.9 PK	74.0	-21.1	1.78 H	64	50.3	2.6
6	5350.00	39.9 AV	54.0	-14.1	1.78 H	64	37.3	2.6
7	#10420.00	45.9 PK	68.2	-22.3	2.27 H	76	33.6	12.3
8	15630.00	47.8 PK	74.0	-26.2	1.21 H	87	35.1	12.7
9	15630.00	35.9 AV	54.0	-18.1	1.21 H	87	23.2	12.7
10	20840.00	-	-	-	-	-	-	-
11	#26050.00	-	-	-	-	-	-	-
12	31260.00	-	-	-	-	-	-	-
13	36470.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

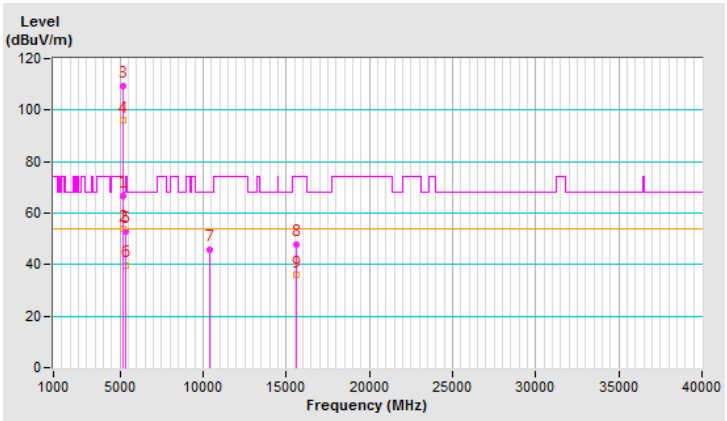


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 42：5.21 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=3kHz
量 測 場 地 溫 度 ：	23℃	量 測 場 地 濕 度 ：	67%RH
測 試 日 期 ：	109 年 1 月 22 日	測 試 者 ：	柯其宗

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	66.6 PK	74.0	-7.4	2.00 V	337	63.6	3.0
2	5150.00	48.1 AV	54.0	-5.9	2.00 V	337	45.1	3.0
3	*5210.00	105.8 PK			2.00 V	337	103.1	2.7
4	*5210.00	93.5 AV			2.00 V	337	90.8	2.7
5	5350.00	48.9 PK	74.0	-25.1	2.00 V	337	46.3	2.6
6	5350.00	36.4 AV	54.0	-17.6	2.00 V	337	33.8	2.6
7	#10420.00	45.6 PK	68.2	-22.6	1.05 V	99	33.3	12.3
8	15630.00	51.6 PK	74.0	-22.4	2.15 V	92	38.9	12.7
9	15630.00	37.4 AV	54.0	-16.6	2.15 V	92	24.7	12.7
10	20840.00	-	-	-	-	-	-	-
11	#26050.00	-	-	-	-	-	-	-
12	31260.00	-	-	-	-	-	-	-
13	36470.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

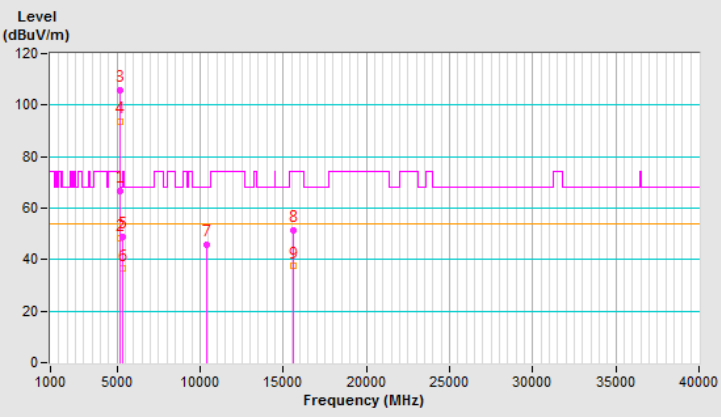


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 58：5.29 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=3kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	71%RH
測 試 日 期 ：	109 年 2 月 28 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	55.3 PK	74.0	-18.7	1.63 H	56	52.3	3.0
2	5150.00	43.6 AV	54.0	-10.4	1.63 H	56	40.6	3.0
3	*5290.00	107.4 PK			1.63 H	56	105.0	2.4
4	*5290.00	95.8 AV			1.63 H	56	93.4	2.4
5	5350.00	68.3 PK	74.0	-5.7	1.63 H	56	65.7	2.6
6	5350.00	53.6 AV	54.0	-0.4	1.63 H	56	51.0	2.6
7	#10580.00	45.9 PK	68.2	-22.3	3.61 H	221	33.4	12.5
8	15870.00	47.5 PK	74.0	-26.5	1.54 H	170	35.6	11.9
9	15870.00	34.6 AV	54.0	-19.4	1.54 H	170	22.7	11.9
10	21160.00	-	-	-	-	-	-	-
11	#26450.00	-	-	-	-	-	-	-
12	31740.00	-	-	-	-	-	-	-
13	#37030.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

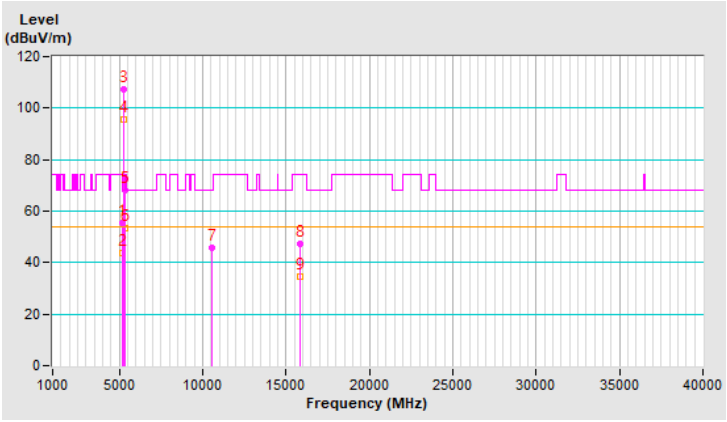


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 58：5.29 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=3kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	71%RH
測 試 日 期 ：	109 年 2 月 28 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	51.4 PK	74.0	-22.6	2.75 V	97	48.4	3.0
2	5150.00	40.5 AV	54.0	-13.5	2.75 V	97	37.5	3.0
3	*5290.00	104.3 PK			2.75 V	97	101.9	2.4
4	*5290.00	92.5 AV			2.75 V	97	90.1	2.4
5	5350.00	64.7 PK	74.0	-9.3	2.75 V	97	62.1	2.6
6	5350.00	50.1 AV	54.0	-3.9	2.75 V	97	47.5	2.6
7	#10580.00	46.0 PK	68.2	-22.2	3.16 V	219	33.5	12.5
8	15870.00	46.3 PK	74.0	-27.7	3.62 V	165	34.4	11.9
9	15870.00	32.6 AV	54.0	-21.4	3.62 V	165	20.7	11.9
10	21160.00	-	-	-	-	-	-	-
11	#26450.00	-	-	-	-	-	-	-
12	31740.00	-	-	-	-	-	-	-
13	#37030.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

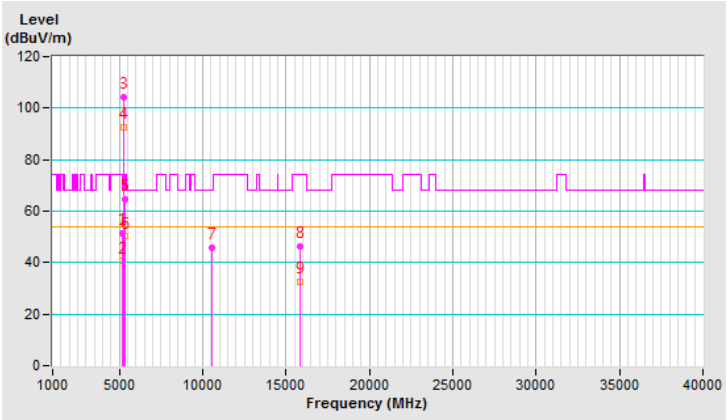


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 106：5.53 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=3kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	71%RH
測 試 日 期 ：	109 年 2 月 28 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	64.7 PK	74.0	-9.3	1.65 H	51	61.7	3.0
2	5460.00	48.3 AV	54.0	-5.7	1.65 H	51	45.3	3.0
3	#5470.00	67.8 PK	68.2	-0.4	1.65 H	51	64.7	3.1
4	*5530.00	108.2 PK			1.65 H	51	105.2	3.0
5	*5530.00	95.7 AV			1.65 H	51	92.7	3.0
6	#5725.00	53.4 PK	68.2	-14.8	1.65 H	51	50.1	3.3
7	11060.00	45.2 PK	74.0	-28.8	3.65 H	223	32.8	12.4
8	11060.00	32.3 AV	54.0	-21.7	3.65 H	223	19.9	12.4
9	#16590.00	47.9 PK	68.2	-20.3	1.56 H	169	33.5	14.4
10	22120.00	-	-	-	-	-	-	-
11	#27650.00	-	-	-	-	-	-	-
12	#33180.00	-	-	-	-	-	-	-
13	38710.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

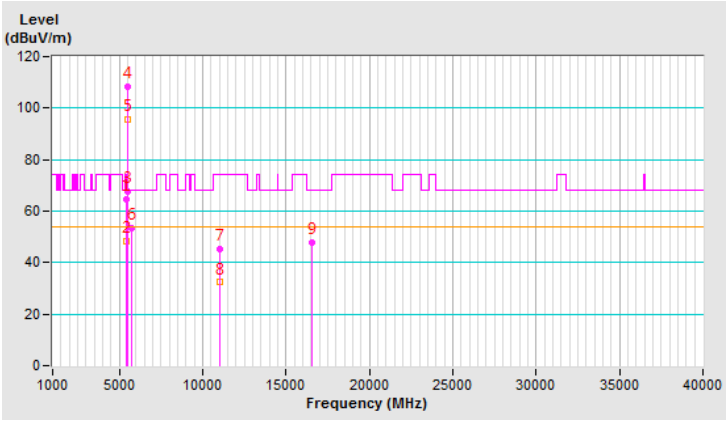


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 106：5.53 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=3kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	71%RH
測 試 日 期 ：	109 年 2 月 28 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	63.0 PK	74.0	-11.0	2.78 V	117	60.0	3.0
2	5460.00	46.5 AV	54.0	-7.5	2.78 V	117	43.5	3.0
3	#5470.00	64.9 PK	68.2	-3.3	2.78 V	117	61.8	3.1
4	*5530.00	105.2 PK			2.78 V	117	102.2	3.0
5	*5530.00	92.5 AV			2.78 V	117	89.5	3.0
6	#5725.00	53.5 PK	68.2	-14.7	2.78 V	117	50.2	3.3
7	11060.00	45.6 PK	74.0	-28.4	3.08 V	213	33.2	12.4
8	11060.00	32.6 AV	54.0	-21.4	3.08 V	213	20.2	12.4
9	#16590.00	46.0 PK	68.2	-22.2	3.63 V	149	31.6	14.4
10	22120.00	-	-	-	-	-	-	-
11	#27650.00	-	-	-	-	-	-	-
12	#33180.00	-	-	-	-	-	-	-
13	38710.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

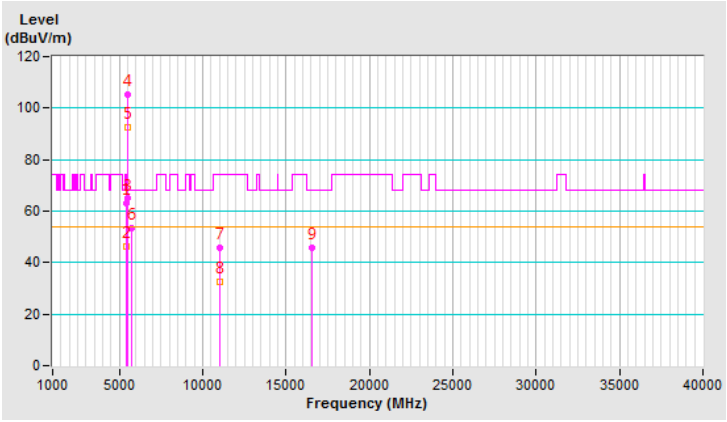


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 122：5.61 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=3kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	71%RH
測 試 日 期 ：	109 年 2 月 28 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5610.00	112.7 PK			1.64 H	56	109.7	3.0
2	*5610.00	99.5 AV			1.64 H	56	96.5	3.0
3	#5725.00	67.9 PK	68.2	-0.3	1.64 H	56	64.6	3.3
4	11220.00	45.9 PK	74.0	-28.1	3.67 H	207	33.4	12.5
5	11220.00	32.6 AV	54.0	-21.4	3.67 H	207	20.1	12.5
6	#16830.00	47.7 PK	68.2	-20.5	1.55 H	153	32.8	14.9
7	22440.00	-	-	-	-	-	-	-
8	#28050.00	-	-	-	-	-	-	-
9	#33660.00	-	-	-	-	-	-	-
10	39270.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

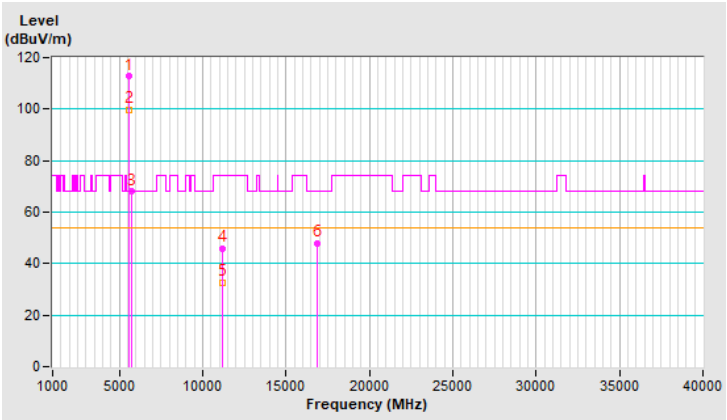


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 122：5.61 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=3kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	71%RH
測 試 日 期 ：	109 年 2 月 28 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5610.00	109.9 PK			2.81 V	124	106.9	3.0
2	*5610.00	96.7 AV			2.81 V	124	93.7	3.0
3	#5725.00	66.5 PK	68.2	-1.7	2.81 V	124	63.2	3.3
4	11220.00	45.5 PK	74.0	-28.5	3.10 V	218	33.0	12.5
5	11220.00	32.5 AV	54.0	-21.5	3.10 V	218	20.0	12.5
6	#16830.00	46.0 PK	68.2	-22.2	3.52 V	175	31.1	14.9
7	22440.00	-	-	-	-	-	-	-
8	#28050.00	-	-	-	-	-	-	-
9	#33660.00	-	-	-	-	-	-	-
10	39270.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

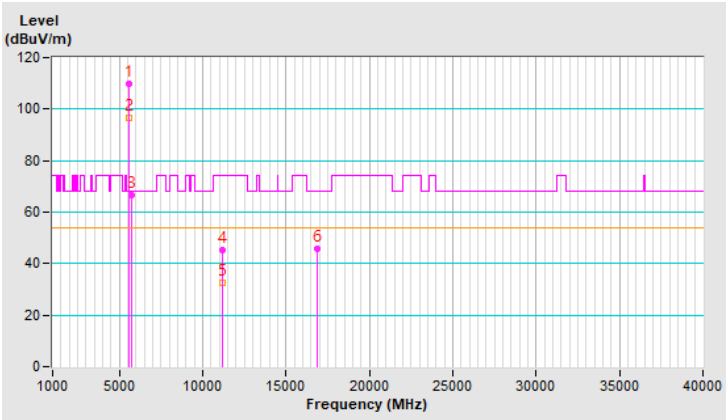


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 138：5.69 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=3kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	71%RH
測 試 日 期 ：	109 年 2 月 28 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	55.8 PK	74.0	-18.2	1.61 H	56	52.8	3.0
2	5460.00	42.3 AV	54.0	-11.7	1.61 H	56	39.3	3.0
3	#5470.00	56.3 PK	68.2	-11.9	1.61 H	56	53.2	3.1
4	*5690.00	115.8 PK			1.61 H	56	112.6	3.2
5	*5690.00	103.4 AV			1.61 H	56	100.2	3.2
6	#5850.00	64.4 PK	68.2	-3.8	1.61 H	56	60.7	3.7
7	11380.00	45.9 PK	74.0	-28.1	3.60 H	222	33.0	12.9
8	11380.00	32.6 AV	54.0	-21.4	3.60 H	222	19.7	12.9
9	#17070.00	47.8 PK	68.2	-20.4	1.53 H	146	31.7	16.1
10	22760.00	-	-	-	-	-	-	-
11	#28450.00	-	-	-	-	-	-	-
12	#34140.00	-	-	-	-	-	-	-
13	39830.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

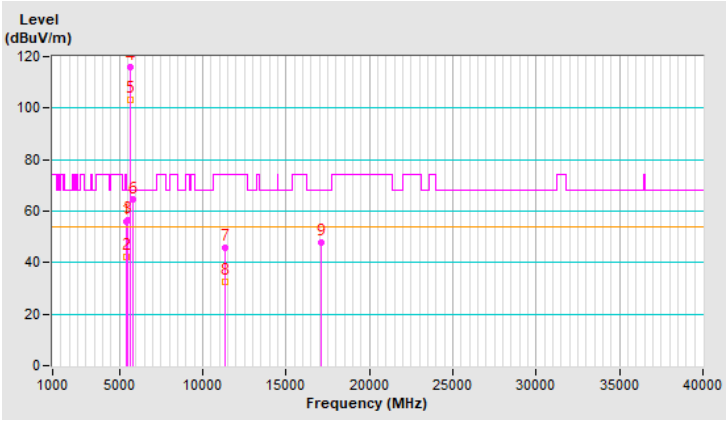


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 138：5.69 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=3kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	71%RH
測 試 日 期 ：	109 年 2 月 28 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	55.5 PK	74.0	-18.5	2.76 V	94	52.5	3.0
2	5460.00	41.9 AV	54.0	-12.1	2.76 V	94	38.9	3.0
3	#5470.00	56.0 PK	68.2	-12.2	2.76 V	94	52.9	3.1
4	*5690.00	113.0 PK			2.76 V	94	109.8	3.2
5	*5690.00	100.5 AV			2.76 V	94	97.3	3.2
6	#5850.00	61.5 PK	68.2	-6.7	2.76 V	94	57.8	3.7
7	11380.00	45.7 PK	74.0	-28.3	3.12 V	211	32.8	12.9
8	11380.00	32.3 AV	54.0	-21.7	3.12 V	211	19.4	12.9
9	#17070.00	45.7 PK	68.2	-22.5	3.52 V	157	29.6	16.1
10	22760.00	-	-	-	-	-	-	-
11	#28450.00	-	-	-	-	-	-	-
12	#34140.00	-	-	-	-	-	-	-
13	39830.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

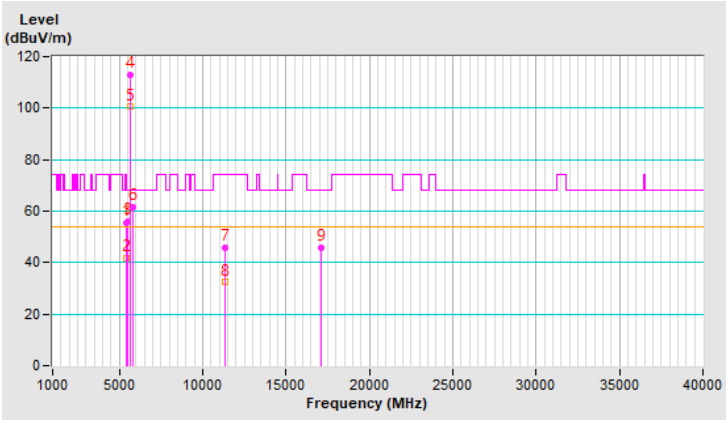


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 155：5.775 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=3kHz
量 測 場 地 溫 度 ：	23℃	量 測 場 地 濕 度 ：	67%RH
測 試 日 期 ：	109 年 1 月 22 日	測 試 者 ：	柯其宗

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5775.00	113.2 PK			1.74 H	52	109.8	3.4
2	*5775.00	101.3 AV			1.74 H	52	97.9	3.4
3	11550.00	43.4 PK	74.0	-30.6	2.27 H	92	31.0	12.4
4	11550.00	32.9 AV	54.0	-21.1	2.27 H	92	20.5	12.4
5	#17325.00	54.2 PK	68.2	-14.0	1.21 H	96	37.5	16.7
6	23100.00	-	-	-	-	-	-	-
7	#28875.00	-	-	-	-	-	-	-
8	#34650.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

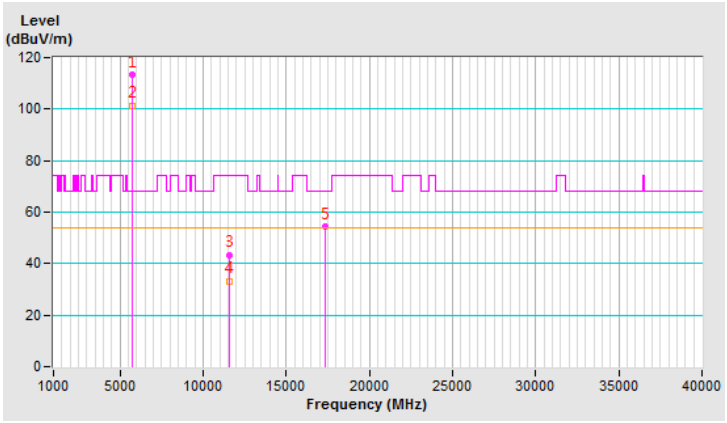


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 155：5.775 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=3kHz
量 測 場 地 溫 度 ：	23℃	量 測 場 地 濕 度 ：	67%RH
測 試 日 期 ：	109 年 1 月 22 日	測 試 者 ：	柯其宗

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5775.00	111.4 PK			3.92 V	353	108.0	3.4
2	*5775.00	99.3 AV			3.92 V	353	95.9	3.4
3	11550.00	43.4 PK	74.0	-30.6	1.04 V	101	31.0	12.4
4	11550.00	33.3 AV	54.0	-20.7	1.04 V	101	20.9	12.4
5	#17325.00	51.9 PK	68.2	-16.3	2.10 V	105	35.2	16.7
6	23100.00	-	-	-	-	-	-	-
7	#28875.00	-	-	-	-	-	-	-
8	#34650.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

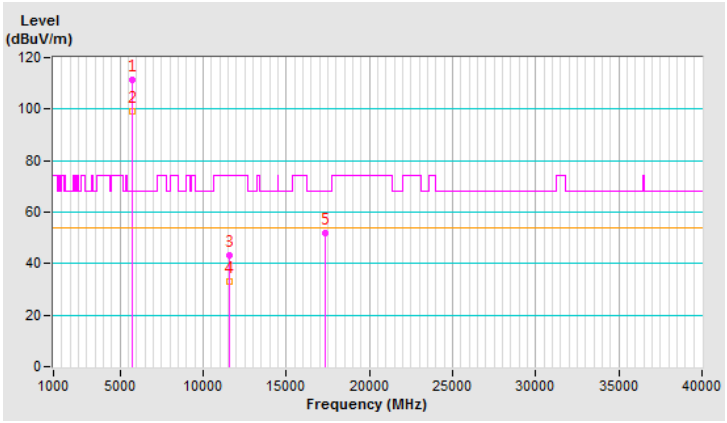

4.9 量測結果 (模式 4)

4.9.1 發射諧波


802.11a

操 作 模 式 ：	發射	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 36：5.18 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=10Hz
量 測 場 地 溫 度 ：	23℃	量 測 場 地 濕 度 ：	67%RH
測 試 日 期 ：	109 年 1 月 22 日	測 試 者 ：	柯其宗

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	72.7 PK	74.0	-1.3	2.40 H	63	69.7	3.0
2	5150.00	53.8 AV	54.0	-0.2	2.40 H	63	50.8	3.0
3	*5180.00	114.9 PK			2.40 H	63	112.0	2.9
4	*5180.00	105.5 AV			2.40 H	63	102.6	2.9
5	#10360.00	46.7 PK	68.2	-21.5	1.78 H	64	34.7	12.0
6	15540.00	46.6 PK	74.0	-27.4	1.57 H	132	33.6	13.0
7	15540.00	34.2 AV	54.0	-19.8	1.57 H	132	21.2	13.0
8	20720.00	-	-	-	-	-	-	-
9	#25900.00	-	-	-	-	-	-	-
10	#31080.00	-	-	-	-	-	-	-
11	#36260.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

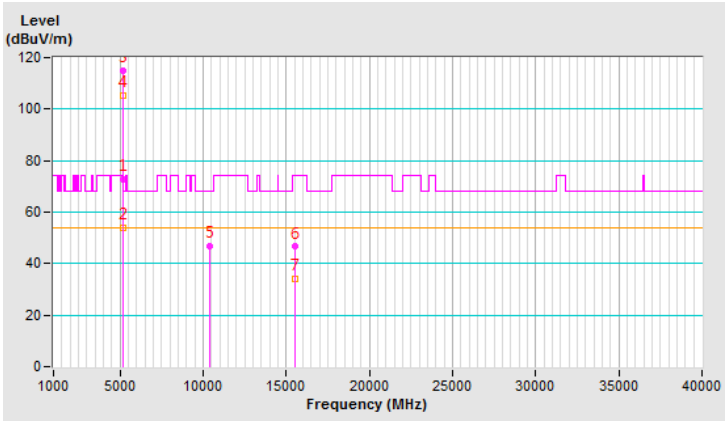


操 作 模 式 ：	發射	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 36：5.18 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=10Hz
量 測 場 地 溫 度 ：	23℃	量 測 場 地 濕 度 ：	67%RH
測 試 日 期 ：	109 年 1 月 22 日	測 試 者 ：	柯其宗

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	65.5 PK	74.0	-8.5	2.16 V	349	62.5	3.0
2	5150.00	46.1 AV	54.0	-7.9	2.16 V	349	43.1	3.0
3	*5180.00	112.9 PK			2.16 V	349	110.0	2.9
4	*5180.00	103.3 AV			2.16 V	349	100.4	2.9
5	#10360.00	45.6 PK	68.2	-22.6	2.47 V	124	33.6	12.0
6	15540.00	46.8 PK	74.0	-27.2	2.23 V	147	33.8	13.0
7	15540.00	35.3 AV	54.0	-18.7	2.23 V	147	22.3	13.0
8	20720.00	-	-	-	-	-	-	-
9	#25900.00	-	-	-	-	-	-	-
10	#31080.00	-	-	-	-	-	-	-
11	#36260.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

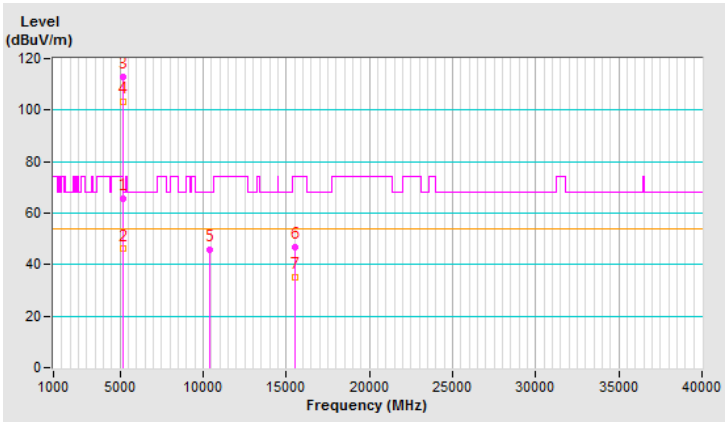


操 作 模 式 ：	發射	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 40：5.2 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=10Hz
量 測 場 地 溫 度 ：	23℃	量 測 場 地 濕 度 ：	67%RH
測 試 日 期 ：	109 年 1 月 22 日	測 試 者 ：	柯其宗

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	66.9 PK	74.0	-7.1	2.43 H	57	63.9	3.0
2	5150.00	45.7 AV	54.0	-8.3	2.43 H	57	42.7	3.0
3	*5200.00	116.7 PK			2.43 H	57	113.9	2.8
4	*5200.00	107.4 AV			2.43 H	57	104.6	2.8
5	#10400.00	46.9 PK	68.2	-21.3	1.75 H	63	34.8	12.1
6	15600.00	47.1 PK	74.0	-26.9	1.58 H	143	34.2	12.9
7	15600.00	34.8 AV	54.0	-19.2	1.58 H	143	21.9	12.9
8	20800.00	-	-	-	-	-	-	-
9	#26000.00	-	-	-	-	-	-	-
10	31200.00	-	-	-	-	-	-	-
11	#36400.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

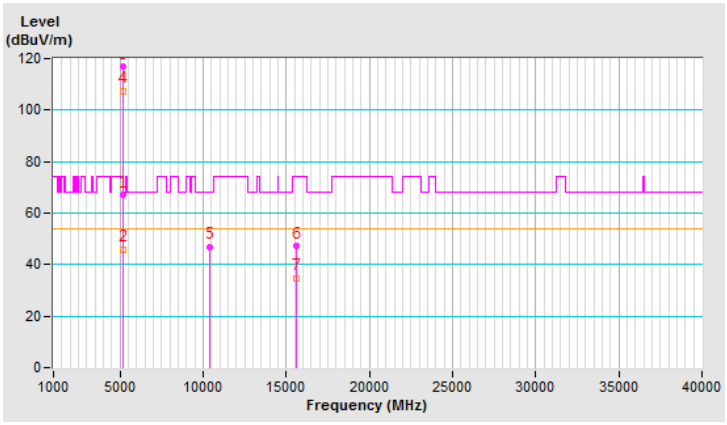


操 作 模 式 ：	發射	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 40：5.2 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=10Hz
量 測 場 地 溫 度 ：	23℃	量 測 場 地 濕 度 ：	67%RH
測 試 日 期 ：	109 年 1 月 22 日	測 試 者 ：	柯其宗

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	53.6 PK	74.0	-20.4	1.99 V	355	50.6	3.0
2	5150.00	43.9 AV	54.0	-10.1	1.99 V	355	40.9	3.0
3	*5200.00	115.4 PK			1.99 V	355	112.6	2.8
4	*5200.00	105.6 AV			1.99 V	355	102.8	2.8
5	#10400.00	45.2 PK	68.2	-23.0	2.43 V	135	33.1	12.1
6	15600.00	47.6 PK	74.0	-26.4	2.20 V	138	34.7	12.9
7	15600.00	36.1 AV	54.0	-17.9	2.20 V	138	23.2	12.9
8	20800.00	-	-	-	-	-	-	-
9	#26000.00	-	-	-	-	-	-	-
10	31200.00	-	-	-	-	-	-	-
11	#36400.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

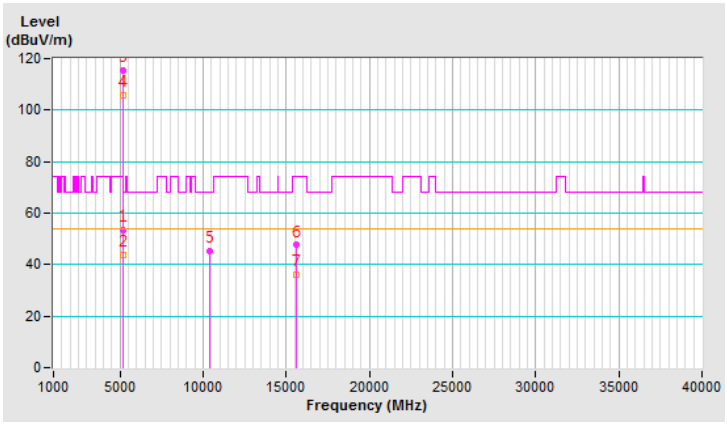


操 作 模 式 ：	發射	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 48：5.24 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=10Hz
量 測 場 地 溫 度 ：	23℃	量 測 場 地 濕 度 ：	67%RH
測 試 日 期 ：	109 年 1 月 22 日	測 試 者 ：	柯其宗

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	54.1 PK	74.0	-19.9	2.42 H	58	51.1	3.0
2	5150.00	41.4 AV	54.0	-12.6	2.42 H	58	38.4	3.0
3	*5240.00	116.6 PK			2.42 H	58	114.0	2.6
4	*5240.00	106.9 AV			2.42 H	58	104.3	2.6
5	5350.00	54.4 PK	74.0	-19.6	2.42 H	58	51.8	2.6
6	5350.00	41.8 AV	54.0	-12.2	2.42 H	58	39.2	2.6
7	#10480.00	47.5 PK	68.2	-20.7	1.79 H	62	35.0	12.5
8	15720.00	47.1 PK	74.0	-26.9	1.52 H	153	34.9	12.2
9	15720.00	34.8 AV	54.0	-19.2	1.52 H	153	22.6	12.2
10	20960.00	-	-	-	-	-	-	-
11	#26200.00	-	-	-	-	-	-	-
12	31440.00	-	-	-	-	-	-	-
13	#36680.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

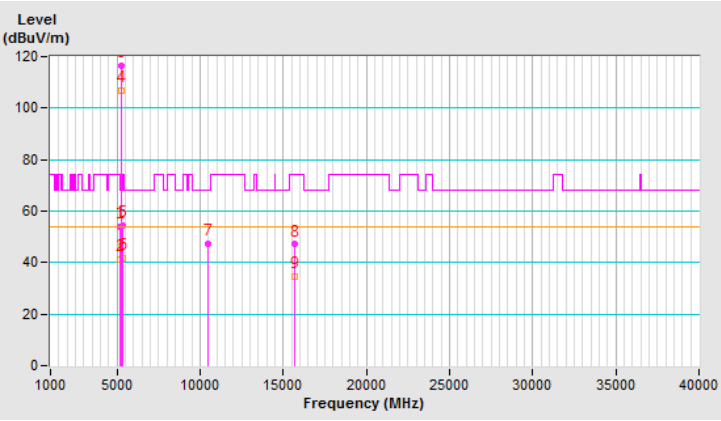


操 作 模 式 ：	發射	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 48：5.24 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=10Hz
量 測 場 地 溫 度 ：	23℃	量 測 場 地 濕 度 ：	67%RH
測 試 日 期 ：	109 年 1 月 22 日	測 試 者 ：	柯其宗

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	52.9 PK	74.0	-21.1	2.17 V	352	49.9	3.0
2	5150.00	40.4 AV	54.0	-13.6	2.17 V	352	37.4	3.0
3	*5240.00	115.7 PK			2.17 V	352	113.1	2.6
4	*5240.00	103.9 AV			2.17 V	352	101.3	2.6
5	5350.00	52.1 PK	74.0	-21.9	2.17 V	352	49.5	2.6
6	5350.00	41.0 AV	54.0	-13.0	2.17 V	352	38.4	2.6
7	#10480.00	45.7 PK	68.2	-22.5	2.47 V	133	33.2	12.5
8	15720.00	47.9 PK	74.0	-26.1	2.18 V	149	35.7	12.2
9	15720.00	36.3 AV	54.0	-17.7	2.18 V	149	24.1	12.2
10	20960.00	-	-	-	-	-	-	-
11	#26200.00	-	-	-	-	-	-	-
12	31440.00	-	-	-	-	-	-	-
13	#36680.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

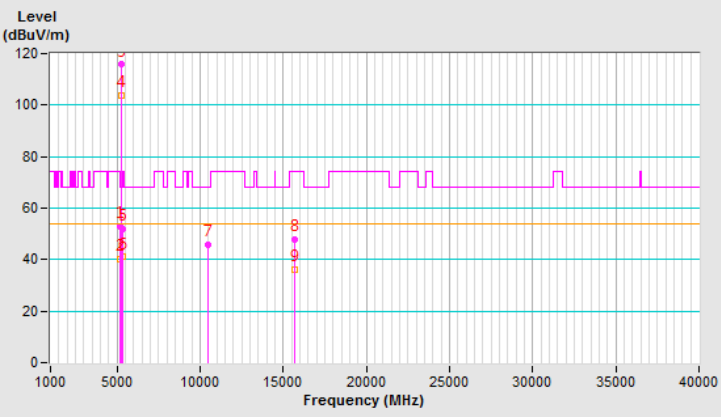


操 作 模 式 ：	發射	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 52：5.26 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=10Hz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	71%RH
測 試 日 期 ：	109 年 2 月 28 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	52.5 PK	74.0	-21.5	2.39 H	64	49.5	3.0
2	5150.00	43.7 AV	54.0	-10.3	2.39 H	64	40.7	3.0
3	*5260.00	116.3 PK			2.39 H	64	113.8	2.5
4	*5260.00	106.4 AV			2.39 H	64	103.9	2.5
5	5350.00	53.5 PK	74.0	-20.5	2.39 H	64	50.9	2.6
6	5350.00	42.7 AV	54.0	-11.3	2.39 H	64	40.1	2.6
7	#10520.00	45.9 PK	68.2	-22.3	3.57 H	208	33.3	12.6
8	15780.00	47.6 PK	74.0	-26.4	1.60 H	174	35.8	11.8
9	15780.00	36.4 AV	54.0	-17.6	1.60 H	174	24.6	11.8
10	21040.00	-	-	-	-	-	-	-
11	#26300.00	-	-	-	-	-	-	-
12	31560.00	-	-	-	-	-	-	-
13	#36820.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

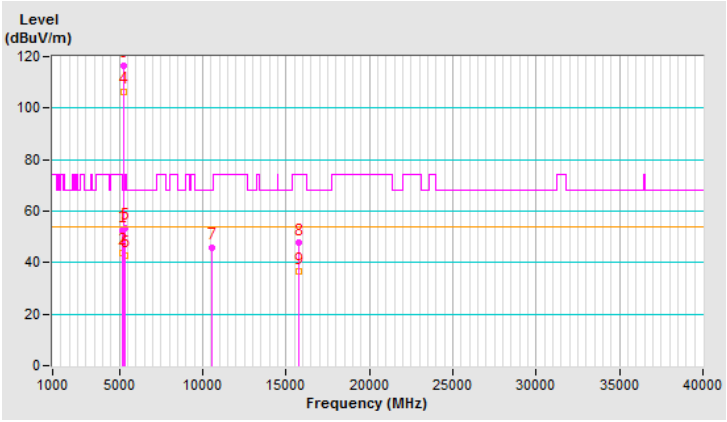


操 作 模 式 ：	發射	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 52：5.26 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=10Hz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	71%RH
測 試 日 期 ：	109 年 2 月 28 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	51.4 PK	74.0	-22.6	3.13 V	39	48.4	3.0
2	5150.00	41.2 AV	54.0	-12.8	3.13 V	39	38.2	3.0
3	*5260.00	113.1 PK			3.13 V	39	110.6	2.5
4	*5260.00	103.2 AV			3.13 V	39	100.7	2.5
5	5350.00	53.3 PK	74.0	-20.7	3.13 V	39	50.7	2.6
6	5350.00	41.2 AV	54.0	-12.8	3.13 V	39	38.6	2.6
7	#10520.00	46.2 PK	68.2	-22.0	3.13 V	201	33.6	12.6
8	15780.00	45.2 PK	74.0	-28.8	3.55 V	176	33.4	11.8
9	15780.00	34.0 AV	54.0	-20.0	3.55 V	176	22.2	11.8
10	21040.00	-	-	-	-	-	-	-
11	#26300.00	-	-	-	-	-	-	-
12	31560.00	-	-	-	-	-	-	-
13	#36820.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

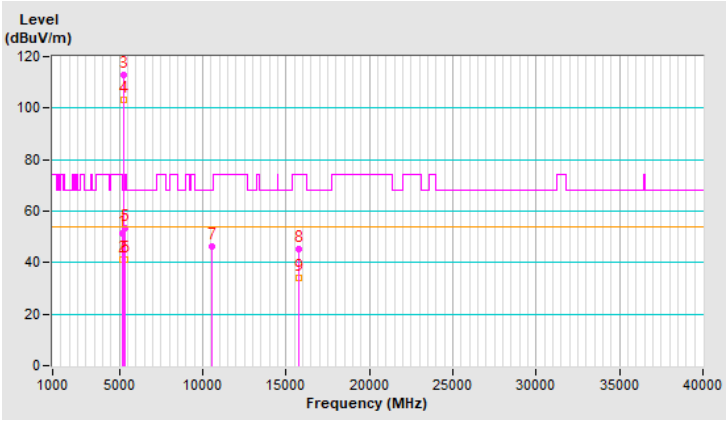


操 作 模 式 ：	發射	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 60：5.3 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=10Hz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	71%RH
測 試 日 期 ：	109 年 2 月 28 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5300.00	114.5 PK			2.32 H	61	112.1	2.4
2	*5300.00	105.2 AV			2.32 H	61	102.8	2.4
3	5350.00	59.1 PK	74.0	-14.9	2.32 H	61	56.5	2.6
4	5350.00	44.4 AV	54.0	-9.6	2.32 H	61	41.8	2.6
5	10600.00	46.1 PK	74.0	-27.9	3.53 H	216	33.7	12.4
6	10600.00	32.6 AV	54.0	-21.4	3.53 H	216	20.2	12.4
7	15900.00	47.2 PK	74.0	-26.8	1.55 H	185	35.1	12.1
8	15900.00	36.0 AV	54.0	-18.0	1.55 H	185	23.9	12.1
9	21200.00	-	-	-	-	-	-	-
10	#26500.00	-	-	-	-	-	-	-
11	31800.00	-	-	-	-	-	-	-
12	#37100.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

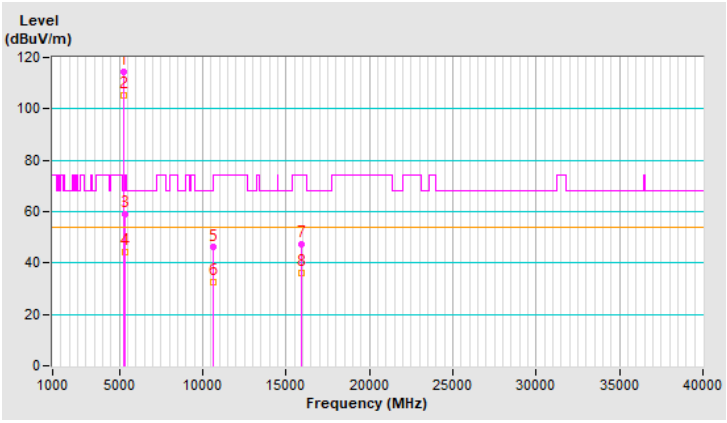


操 作 模 式 ：	發射	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 60：5.3 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=10Hz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	71%RH
測 試 日 期 ：	109 年 2 月 28 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5300.00	112.2 PK			3.15 V	33	109.8	2.4
2	*5300.00	102.2 AV			3.15 V	33	99.8	2.4
3	5350.00	56.6 PK	74.0	-17.4	3.15 V	33	54.0	2.6
4	5350.00	41.7 AV	54.0	-12.3	3.15 V	33	39.1	2.6
5	10600.00	46.3 PK	74.0	-27.7	3.06 V	193	33.9	12.4
6	10600.00	32.8 AV	54.0	-21.2	3.06 V	193	20.4	12.4
7	15900.00	45.5 PK	74.0	-28.5	3.55 V	155	33.4	12.1
8	15900.00	34.6 AV	54.0	-19.4	3.55 V	155	22.5	12.1
9	21200.00	-	-	-	-	-	-	-
10	#26500.00	-	-	-	-	-	-	-
11	31800.00	-	-	-	-	-	-	-
12	#37100.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

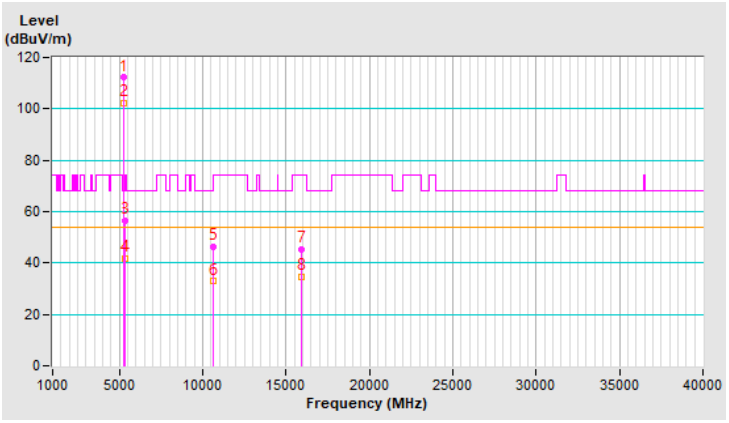


操 作 模 式 ：	發射	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 64：5.32 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=10Hz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	71%RH
測 試 日 期 ：	109 年 2 月 28 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5320.00	115.4 PK			2.45 H	62	112.9	2.5
2	*5320.00	105.9 AV			2.45 H	62	103.4	2.5
3	5350.00	71.2 PK	74.0	-2.8	2.45 H	62	68.6	2.6
4	5350.00	53.7 AV	54.0	-0.3	2.45 H	62	51.1	2.6
5	10640.00	45.3 PK	74.0	-28.7	3.52 H	221	32.9	12.4
6	10640.00	32.2 AV	54.0	-21.8	3.52 H	221	19.8	12.4
7	15960.00	47.5 PK	74.0	-26.5	1.57 H	162	35.1	12.4
8	15960.00	36.5 AV	54.0	-17.5	1.57 H	162	24.1	12.4
9	21280.00	-	-	-	-	-	-	-
10	#26600.00	-	-	-	-	-	-	-
11	#31920.00	-	-	-	-	-	-	-
12	#37240.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

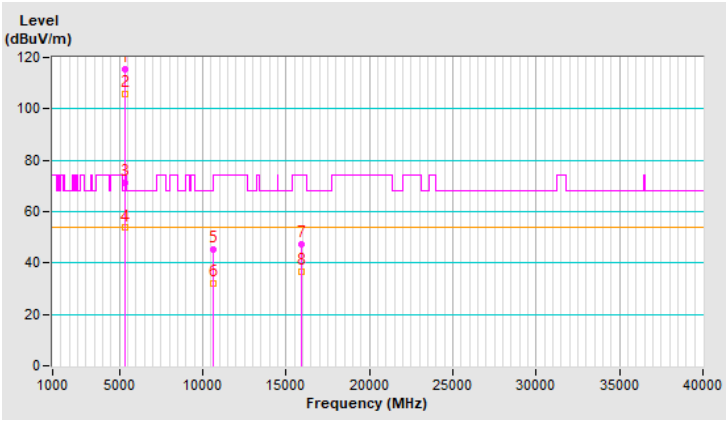


操 作 模 式 ：	發射	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 64：5.32 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=10Hz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	71%RH
測 試 日 期 ：	109 年 2 月 28 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5320.00	112.5 PK			3.09 V	35	110.0	2.5
2	*5320.00	102.4 AV			3.09 V	35	99.9	2.5
3	5350.00	65.8 PK	74.0	-8.2	3.09 V	35	63.2	2.6
4	5350.00	49.9 AV	54.0	-4.1	3.09 V	35	47.3	2.6
5	10640.00	45.6 PK	74.0	-28.4	3.08 V	191	33.2	12.4
6	10640.00	32.5 AV	54.0	-21.5	3.08 V	191	20.1	12.4
7	15960.00	45.3 PK	74.0	-28.7	3.57 V	175	32.9	12.4
8	15960.00	34.1 AV	54.0	-19.9	3.57 V	175	21.7	12.4
9	21280.00	-	-	-	-	-	-	-
10	#26600.00	-	-	-	-	-	-	-
11	#31920.00	-	-	-	-	-	-	-
12	#37240.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

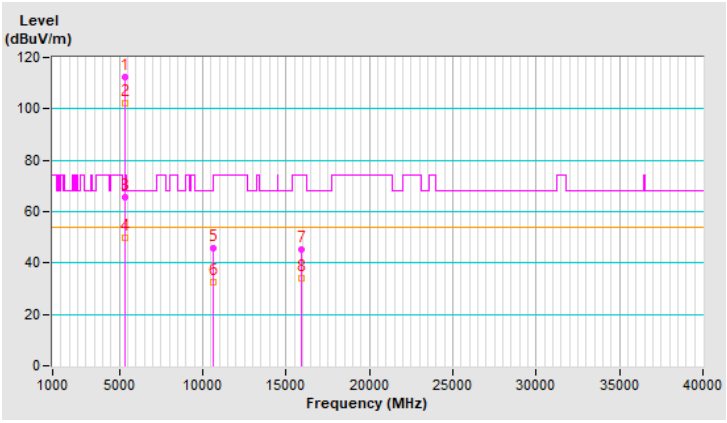


操 作 模 式 ：	發射	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 100：5.5 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=10Hz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	71%RH
測 試 日 期 ：	109 年 2 月 28 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	62.2 PK	74.0	-11.8	2.35 H	53	59.2	3.0
2	5460.00	42.0 AV	54.0	-12.0	2.35 H	53	39.0	3.0
3	#5470.00	68.1 PK	68.2	-0.1	2.35 H	53	65.0	3.1
4	*5500.00	113.4 PK			2.35 H	53	110.3	3.1
5	*5500.00	103.8 AV			2.35 H	53	100.7	3.1
6	11000.00	44.2 PK	74.0	-29.8	3.53 H	222	31.6	12.6
7	11000.00	30.7 AV	54.0	-23.3	3.53 H	222	18.1	12.6
8	#16500.00	46.9 PK	68.2	-21.3	1.64 H	166	33.3	13.6
9	#22000.00	-	-	-	-	-	-	-
10	#27500.00	-	-	-	-	-	-	-
11	#33000.00	-	-	-	-	-	-	-
12	#38500.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

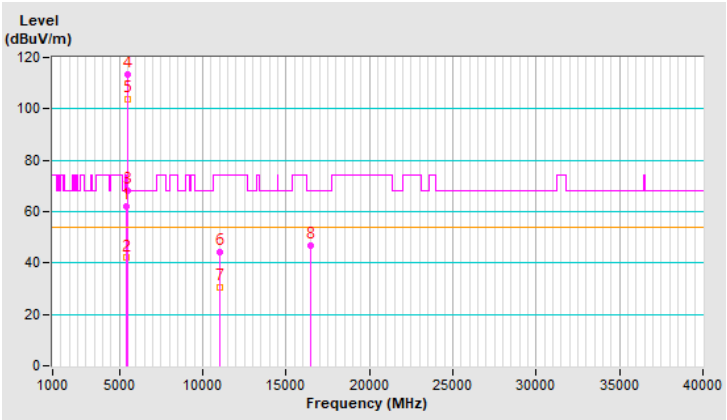


操 作 模 式 ：	發射	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 100：5.5 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=10Hz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	71%RH
測 試 日 期 ：	109 年 2 月 28 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	61.7 PK	74.0	-12.3	3.10 V	39	58.7	3.0
2	5460.00	41.2 AV	54.0	-12.8	3.10 V	39	38.2	3.0
3	#5470.00	65.3 PK	68.2	-2.9	3.10 V	39	62.2	3.1
4	*5500.00	110.0 PK			3.10 V	39	106.9	3.1
5	*5500.00	100.3 AV			3.10 V	39	97.2	3.1
6	11000.00	44.3 PK	74.0	-29.7	3.12 V	205	31.7	12.6
7	11000.00	31.1 AV	54.0	-22.9	3.12 V	205	18.5	12.6
8	#16500.00	45.5 PK	68.2	-22.7	3.58 V	171	31.9	13.6
9	#22000.00	-	-	-	-	-	-	-
10	#27500.00	-	-	-	-	-	-	-
11	#33000.00	-	-	-	-	-	-	-
12	#38500.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

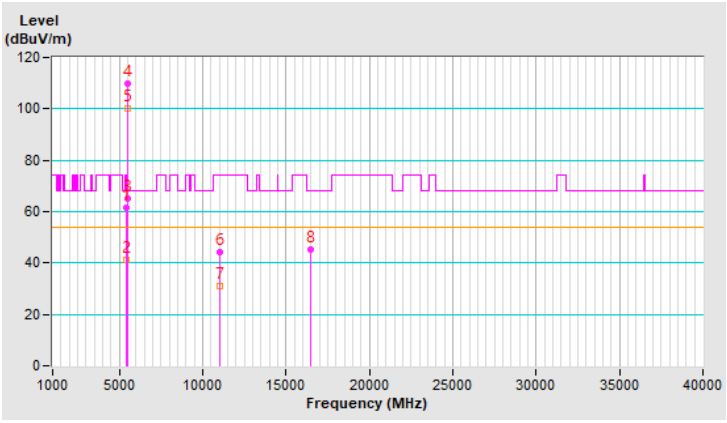


操 作 模 式 ：	發射	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 116：5.58 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=10Hz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	71%RH
測 試 日 期 ：	109 年 2 月 28 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	53.5 PK	74.0	-20.5	2.33 H	56	50.5	3.0
2	5460.00	42.3 AV	54.0	-11.7	2.33 H	56	39.3	3.0
3	#5470.00	54.0 PK	68.2	-14.2	2.33 H	56	50.9	3.1
4	*5580.00	116.8 PK			2.33 H	56	113.8	3.0
5	*5580.00	107.2 AV			2.33 H	56	104.2	3.0
6	11160.00	45.6 PK	74.0	-28.4	3.55 H	203	33.2	12.4
7	11160.00	32.2 AV	54.0	-21.8	3.55 H	203	19.8	12.4
8	#16740.00	47.8 PK	68.2	-20.4	1.58 H	174	33.0	14.8
9	22320.00	-	-	-	-	-	-	-
10	#27900.00	-	-	-	-	-	-	-
11	#33480.00	-	-	-	-	-	-	-
12	39060.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

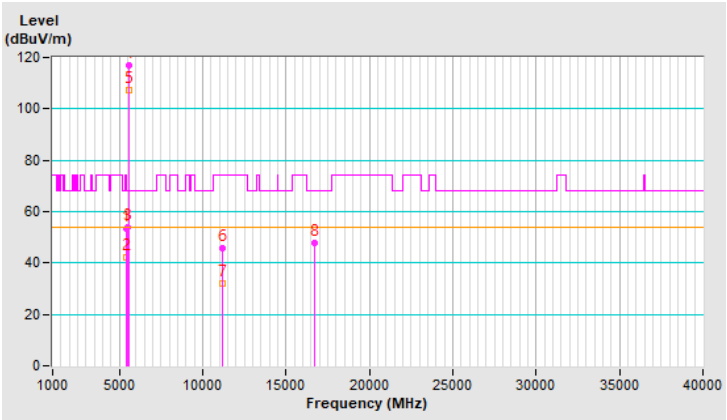


操 作 模 式 ：	發射	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 116：5.58 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=10Hz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	71%RH
測 試 日 期 ：	109 年 2 月 28 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	53.3 PK	74.0	-20.7	3.09 V	24	50.3	3.0
2	5460.00	41.5 AV	54.0	-12.5	3.09 V	24	38.5	3.0
3	#5470.00	52.7 PK	68.2	-15.5	3.09 V	24	49.6	3.1
4	*5580.00	114.1 PK			3.09 V	24	111.1	3.0
5	*5580.00	104.5 AV			3.09 V	24	101.5	3.0
6	11160.00	46.3 PK	74.0	-27.7	3.19 V	192	33.9	12.4
7	11160.00	33.2 AV	54.0	-20.8	3.19 V	192	20.8	12.4
8	#16740.00	45.9 PK	68.2	-22.3	3.57 V	191	31.1	14.8
9	22320.00	-	-	-	-	-	-	-
10	#27900.00	-	-	-	-	-	-	-
11	#33480.00	-	-	-	-	-	-	-
12	39060.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

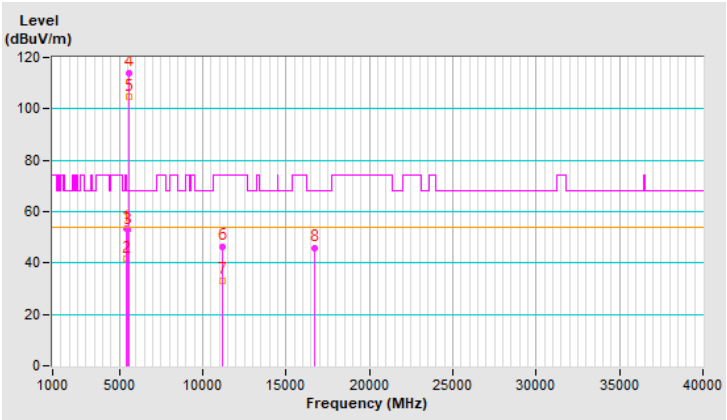


操 作 模 式 ：	發射	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 140：5.7 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=10Hz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	71%RH
測 試 日 期 ：	109 年 2 月 28 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5700.00	110.7 PK			1.58 H	50	107.5	3.2
2	*5700.00	100.8 AV			1.58 H	50	97.6	3.2
3	#5725.00	67.8 PK	68.2	-0.4	1.58 H	50	64.5	3.3
4	11400.00	44.4 PK	74.0	-29.6	3.62 H	213	31.4	13.0
5	11400.00	31.0 AV	54.0	-23.0	3.62 H	213	18.0	13.0
6	#17100.00	46.9 PK	68.2	-21.3	1.58 H	174	30.6	16.3
7	22800.00	-	-	-	-	-	-	-
8	#28500.00	-	-	-	-	-	-	-
9	#34200.00	-	-	-	-	-	-	-
10	39900.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

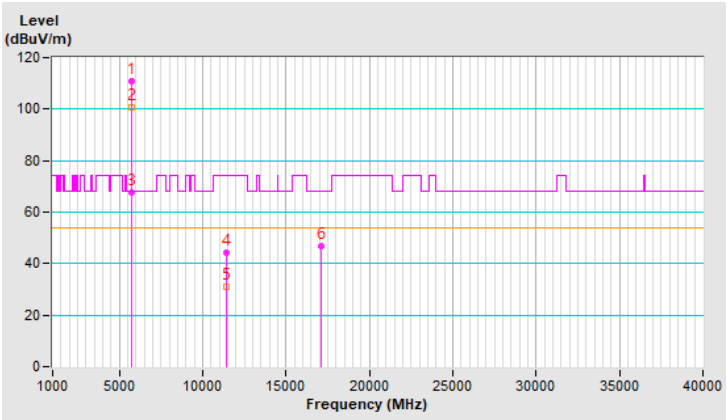


操 作 模 式 ：	發射	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 140：5.7 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=10Hz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	71%RH
測 試 日 期 ：	109 年 2 月 28 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5700.00	107.7 PK			3.12 V	44	104.5	3.2
2	*5700.00	97.5 AV			3.12 V	44	94.3	3.2
3	#5725.00	65.3 PK	68.2	-2.9	3.12 V	44	62.0	3.3
4	11400.00	44.4 PK	74.0	-29.6	3.09 V	187	31.4	13.0
5	11400.00	31.4 AV	54.0	-22.6	3.09 V	187	18.4	13.0
6	#17100.00	45.1 PK	68.2	-23.1	3.52 V	154	28.8	16.3
7	22800.00	-	-	-	-	-	-	-
8	#28500.00	-	-	-	-	-	-	-
9	#34200.00	-	-	-	-	-	-	-
10	39900.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

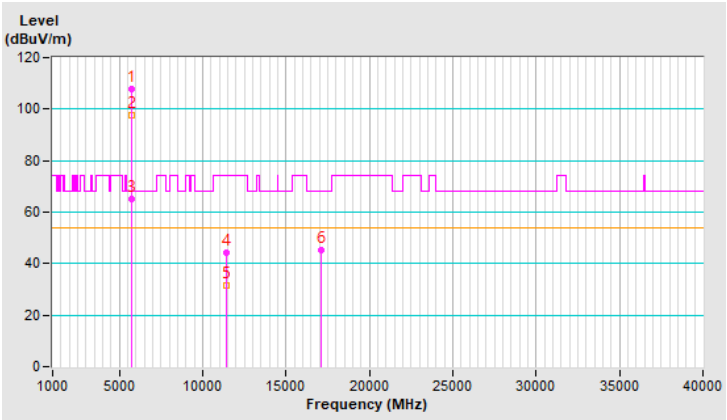


操 作 模 式 ：	發射	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 144：5.72 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=10Hz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	71%RH
測 試 日 期 ：	109 年 2 月 28 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	51.1 PK	74.0	-22.9	1.60 H	59	48.1	3.0
2	5460.00	38.8 AV	54.0	-15.2	1.60 H	59	35.8	3.0
3	#5470.00	50.7 PK	68.2	-17.5	1.60 H	59	47.6	3.1
4	*5720.00	114.9 PK			1.60 H	59	111.7	3.2
5	*5720.00	105.6 AV			1.60 H	59	102.4	3.2
6	#5850.00	53.2 PK	68.2	-15.0	1.60 H	59	49.5	3.7
7	11440.00	46.2 PK	74.0	-27.8	3.61 H	208	33.4	12.8
8	11440.00	32.6 AV	54.0	-21.4	3.61 H	208	19.8	12.8
9	#17160.00	47.4 PK	68.2	-20.8	1.58 H	185	30.8	16.6
10	22880.00	-	-	-	-	-	-	-
11	#28600.00	-	-	-	-	-	-	-
12	#34320.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

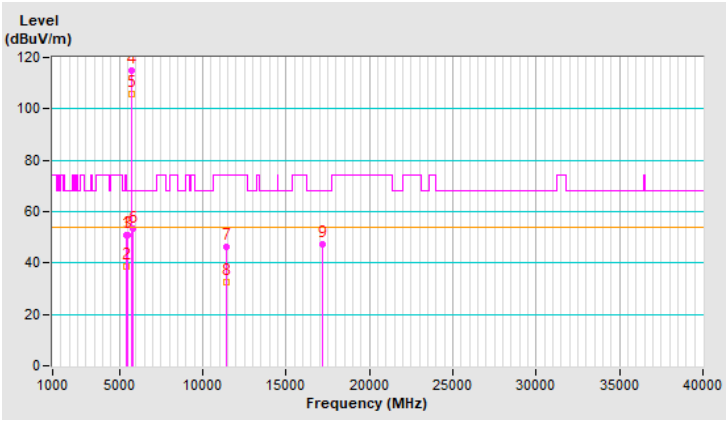


操 作 模 式 ：	發射	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 144：5.72 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=10Hz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	71%RH
測 試 日 期 ：	109 年 2 月 28 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	50.9 PK	74.0	-23.1	3.16 V	28	47.9	3.0
2	5460.00	37.7 AV	54.0	-16.3	3.16 V	28	34.7	3.0
3	#5470.00	50.4 PK	68.2	-17.8	3.16 V	28	47.3	3.1
4	*5720.00	112.2 PK			3.16 V	28	109.0	3.2
5	*5720.00	102.7 AV			3.16 V	28	99.5	3.2
6	#5850.00	52.7 PK	68.2	-15.5	3.16 V	28	49.0	3.7
7	11440.00	45.7 PK	74.0	-28.3	3.18 V	197	32.9	12.8
8	11440.00	32.5 AV	54.0	-21.5	3.18 V	197	19.7	12.8
9	#17160.00	45.8 PK	68.2	-22.4	3.56 V	172	29.2	16.6
10	22880.00	-	-	-	-	-	-	-
11	#28600.00	-	-	-	-	-	-	-
12	#34320.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

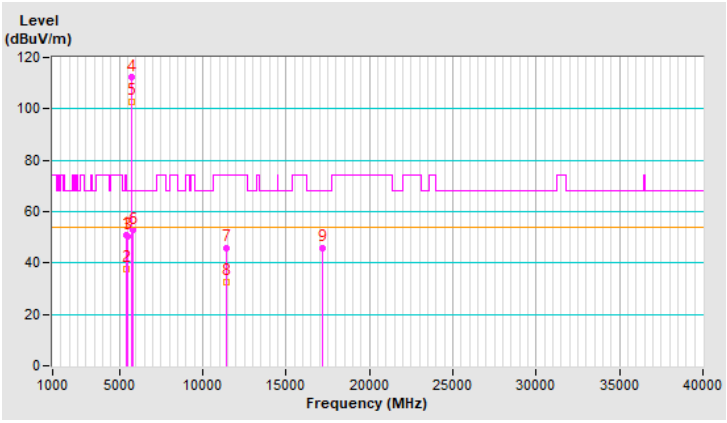


操 作 模 式 ：	發射	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 149：5.745 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=10Hz
量 測 場 地 溫 度 ：	23℃	量 測 場 地 濕 度 ：	67%RH
測 試 日 期 ：	109 年 1 月 22 日	測 試 者 ：	柯其宗

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5745.00	117.1 PK			1.30 H	44	113.8	3.3
2	*5745.00	107.1 AV			1.30 H	44	103.8	3.3
3	11490.00	46.3 PK	74.0	-27.7	1.70 H	55	33.7	12.6
4	11490.00	33.8 AV	54.0	-20.2	1.70 H	55	21.2	12.6
5	#17235.00	46.8 PK	68.2	-21.4	1.54 H	144	30.0	16.8
6	22980.00	-	-	-	-	-	-	-
7	#28725.00	-	-	-	-	-	-	-
8	#34470.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

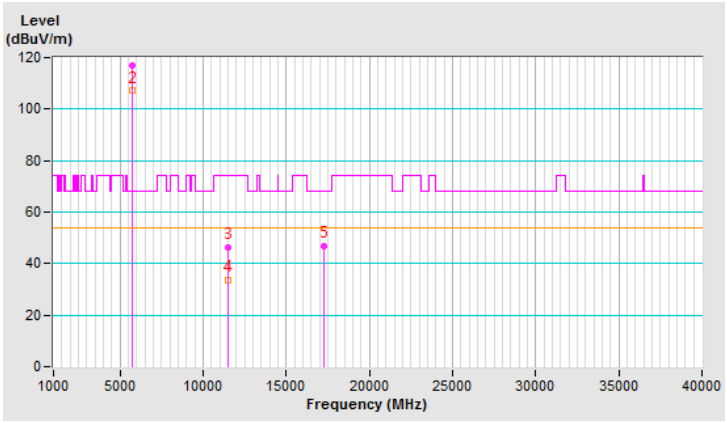


操 作 模 式 ：	發射	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 149：5.745 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=10Hz
量 測 場 地 溫 度 ：	23℃	量 測 場 地 濕 度 ：	67%RH
測 試 日 期 ：	109 年 1 月 22 日	測 試 者 ：	柯其宗

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5745.00	115.4 PK			3.92 V	349	112.1	3.3
2	*5745.00	105.8 AV			3.92 V	349	102.5	3.3
3	11490.00	45.1 PK	74.0	-28.9	2.45 V	133	32.5	12.6
4	11490.00	33.6 AV	54.0	-20.4	2.45 V	133	21.0	12.6
5	#17235.00	47.6 PK	68.2	-20.6	2.25 V	140	30.8	16.8
6	22980.00	-	-	-	-	-	-	-
7	#28725.00	-	-	-	-	-	-	-
8	#34470.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

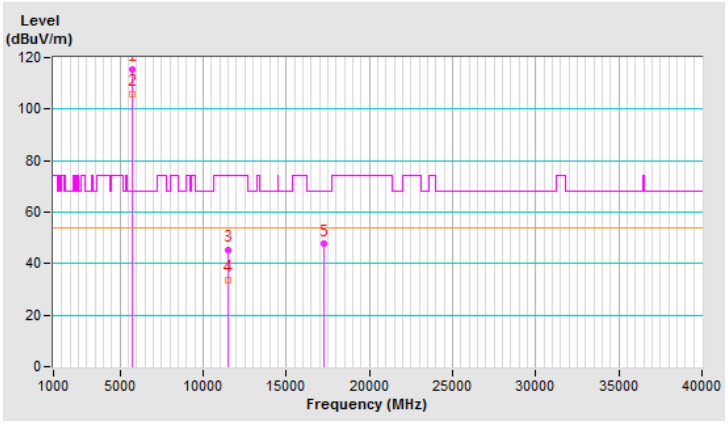


操 作 模 式 ：	發射	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 157：5.785 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=10Hz
量 測 場 地 溫 度 ：	23℃	量 測 場 地 濕 度 ：	67%RH
測 試 日 期 ：	109 年 1 月 22 日	測 試 者 ：	柯其宗

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5785.00	116.7 PK			1.64 H	55	113.3	3.4
2	*5785.00	106.9 AV			1.64 H	55	103.5	3.4
3	11570.00	46.9 PK	74.0	-27.1	1.78 H	73	34.7	12.2
4	11570.00	34.0 AV	54.0	-20.0	1.78 H	73	21.8	12.2
5	#17355.00	47.0 PK	68.2	-21.2	1.53 H	142	30.4	16.6
6	#23140.00	-	-	-	-	-	-	-
7	#28925.00	-	-	-	-	-	-	-
8	#34710.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

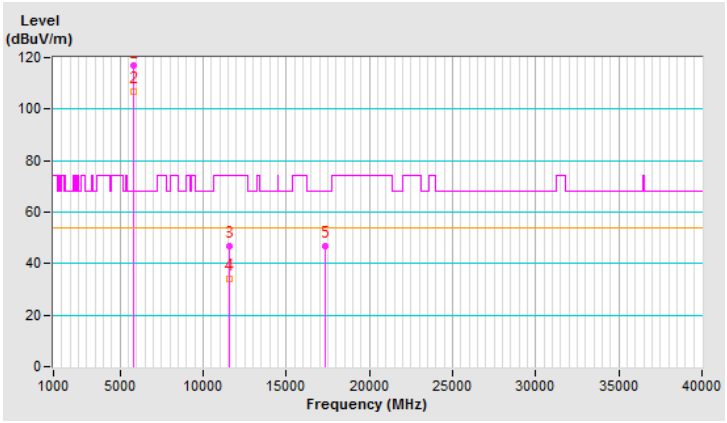


操 作 模 式 ：	發射	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 157：5.785 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=10Hz
量 測 場 地 溫 度 ：	23℃	量 測 場 地 濕 度 ：	67%RH
測 試 日 期 ：	109 年 1 月 22 日	測 試 者 ：	柯其宗

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5785.00	115.2 PK			3.88 V	352	111.8	3.4
2	*5785.00	105.5 AV			3.88 V	352	102.1	3.4
3	11570.00	45.7 PK	74.0	-28.3	2.38 V	146	33.5	12.2
4	11570.00	34.2 AV	54.0	-19.8	2.38 V	146	22.0	12.2
5	#17355.00	47.6 PK	68.2	-20.6	2.23 V	127	31.0	16.6
6	#23140.00	-	-	-	-	-	-	-
7	#28925.00	-	-	-	-	-	-	-
8	#34710.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

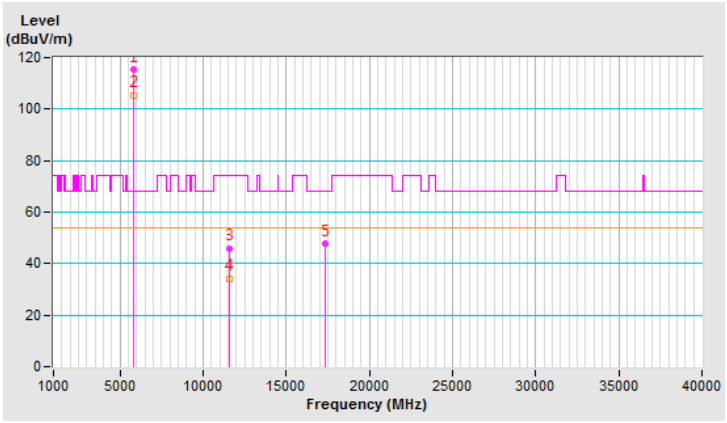


操 作 模 式 ：	發射	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 165：5.825 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=10Hz
量 測 場 地 溫 度 ：	23℃	量 測 場 地 濕 度 ：	67%RH
測 試 日 期 ：	109 年 1 月 22 日	測 試 者 ：	柯其宗

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5825.00	117.3 PK			1.49 H	57	113.7	3.6
2	*5825.00	107.2 AV			1.49 H	57	103.6	3.6
3	11650.00	47.2 PK	74.0	-26.8	1.77 H	71	34.8	12.4
4	11650.00	34.5 AV	54.0	-19.5	1.77 H	71	22.1	12.4
5	#17475.00	46.9 PK	68.2	-21.3	1.56 H	153	29.9	17.0
6	#23300.00	-	-	-	-	-	-	-
7	#29125.00	-	-	-	-	-	-	-
8	#34950.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

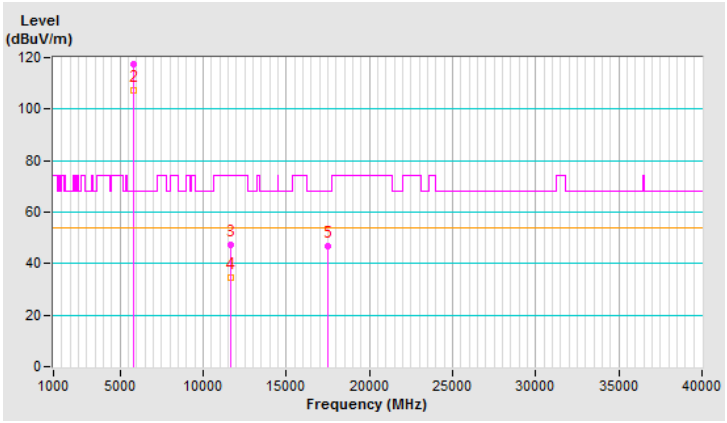


操 作 模 式 ：	發射	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 165：5.825 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=10Hz
量 測 場 地 溫 度 ：	23℃	量 測 場 地 濕 度 ：	67%RH
測 試 日 期 ：	109 年 1 月 22 日	測 試 者 ：	柯其宗

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5825.00	105.9 PK			3.96 V	352	102.3	3.6
2	*5825.00	105.9 AV			3.96 V	352	102.3	3.6
3	11650.00	45.1 PK	74.0	-28.9	2.47 V	133	32.7	12.4
4	11650.00	33.7 AV	54.0	-20.3	2.47 V	133	21.3	12.4
5	#17475.00	48.2 PK	68.2	-20.0	2.23 V	150	31.2	17.0
6	#23300.00	-	-	-	-	-	-	-
7	#29125.00	-	-	-	-	-	-	-
8	#34950.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

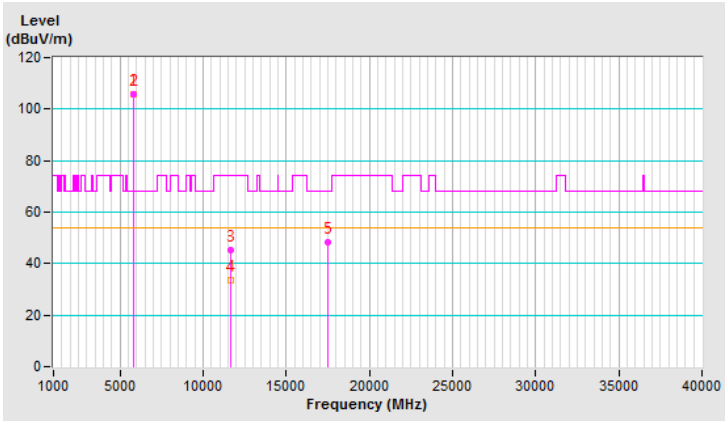


802.11ax (HE20)

操作模式：	發射	調變技術：	OFDMA
基本波頻率：	CH 36：5.18 GHz	測試儀器：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量測場地溫度：	23℃	量測場地濕度：	67%RH
測試日期：	109 年 1 月 22 日	測試者：	柯其宗

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	71.8 PK	74.0	-2.2	2.38 H	55	68.8	3.0
2	5150.00	53.9 AV	54.0	-0.1	2.38 H	55	50.9	3.0
3	*5180.00	114.7 PK			2.38 H	55	111.8	2.9
4	*5180.00	102.8 AV			2.38 H	55	99.9	2.9
5	#10360.00	46.6 PK	68.2	-21.6	1.70 H	64	34.6	12.0
6	15540.00	47.3 PK	74.0	-26.7	1.60 H	145	34.3	13.0
7	15540.00	34.8 AV	54.0	-19.2	1.60 H	145	21.8	13.0
8	20720.00	-	-	-	-	-	-	-
9	#25900.00	-	-	-	-	-	-	-
10	#31080.00	-	-	-	-	-	-	-
11	#36260.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

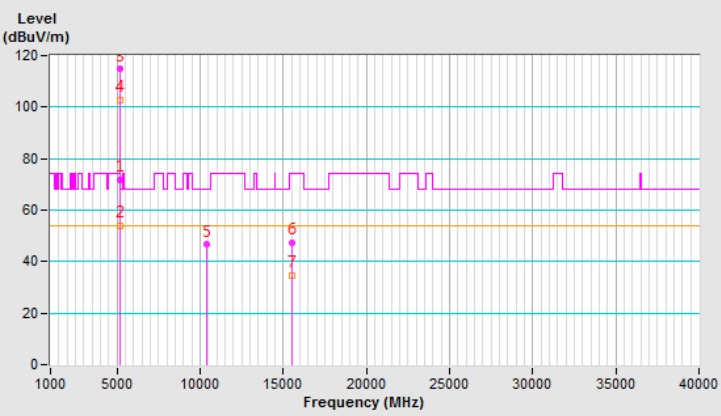


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 36：5.18 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	23℃	量 測 場 地 濕 度 ：	67%RH
測 試 日 期 ：	109 年 1 月 22 日	測 試 者 ：	柯其宗

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	68.5 PK	74.0	-5.5	2.13 V	355	65.5	3.0
2	5150.00	48.7 AV	54.0	-5.3	2.13 V	355	45.7	3.0
3	*5180.00	111.8 PK			2.13 V	355	108.9	2.9
4	*5180.00	99.6 AV			2.13 V	355	96.7	2.9
5	#10360.00	45.1 PK	68.2	-23.1	2.38 V	138	33.1	12.0
6	15540.00	47.6 PK	74.0	-26.4	2.24 V	137	34.6	13.0
7	15540.00	34.9 AV	54.0	-19.1	2.24 V	137	21.9	13.0
8	20720.00	-	-	-	-	-	-	-
9	#25900.00	-	-	-	-	-	-	-
10	#31080.00	-	-	-	-	-	-	-
11	#36260.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

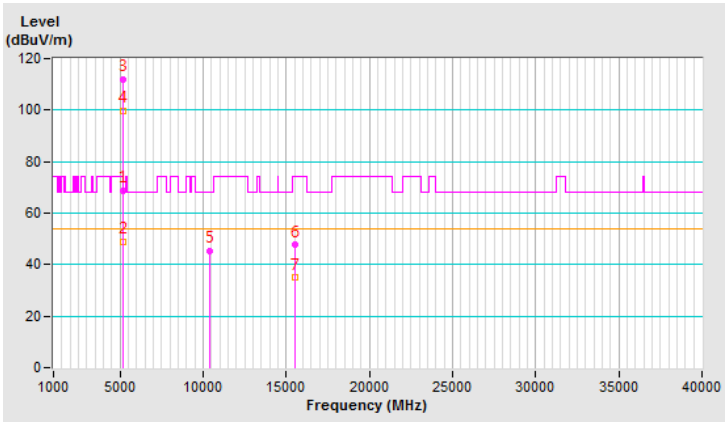


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 40：5.2 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	23℃	量 測 場 地 濕 度 ：	67%RH
測 試 日 期 ：	109 年 1 月 22 日	測 試 者 ：	柯其宗

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	66.4 PK	74.0	-7.6	2.40 H	54	63.4	3.0
2	5150.00	45.4 AV	54.0	-8.6	2.40 H	54	42.4	3.0
3	*5200.00	116.2 PK			2.40 H	54	113.4	2.8
4	*5200.00	107.0 AV			2.40 H	54	104.2	2.8
5	#10400.00	46.4 PK	68.2	-21.8	1.80 H	51	34.3	12.1
6	15600.00	47.1 PK	74.0	-26.9	1.55 H	134	34.2	12.9
7	15600.00	34.7 AV	54.0	-19.3	1.55 H	134	21.8	12.9
8	20800.00	-	-	-	-	-	-	-
9	#26000.00	-	-	-	-	-	-	-
10	31200.00	-	-	-	-	-	-	-
11	#36400.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

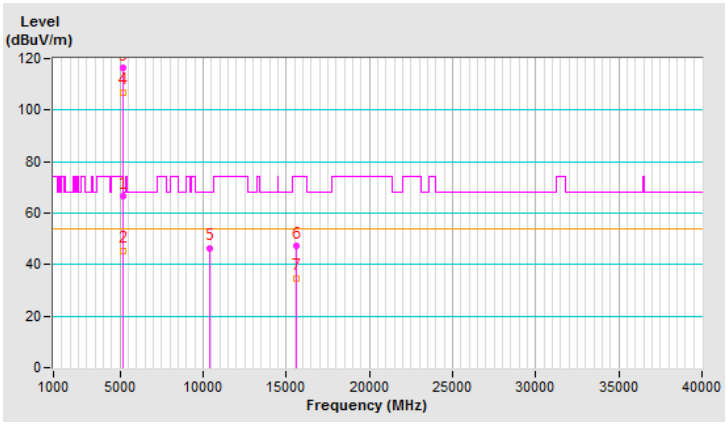


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 40：5.2 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	23℃	量 測 場 地 濕 度 ：	67%RH
測 試 日 期 ：	109 年 1 月 22 日	測 試 者 ：	柯其宗

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	54.3 PK	74.0	-19.7	2.11 V	350	51.3	3.0
2	5150.00	44.8 AV	54.0	-9.2	2.11 V	350	41.8	3.0
3	*5200.00	115.2 PK			2.11 V	350	112.4	2.8
4	*5200.00	105.5 AV			2.11 V	350	102.7	2.8
5	#10400.00	44.6 PK	68.2	-23.6	2.38 V	153	32.5	12.1
6	15600.00	48.0 PK	74.0	-26.0	2.19 V	152	35.1	12.9
7	15600.00	35.1 AV	54.0	-18.9	2.19 V	152	22.2	12.9
8	20800.00	-	-	-	-	-	-	-
9	#26000.00	-	-	-	-	-	-	-
10	31200.00	-	-	-	-	-	-	-
11	#36400.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

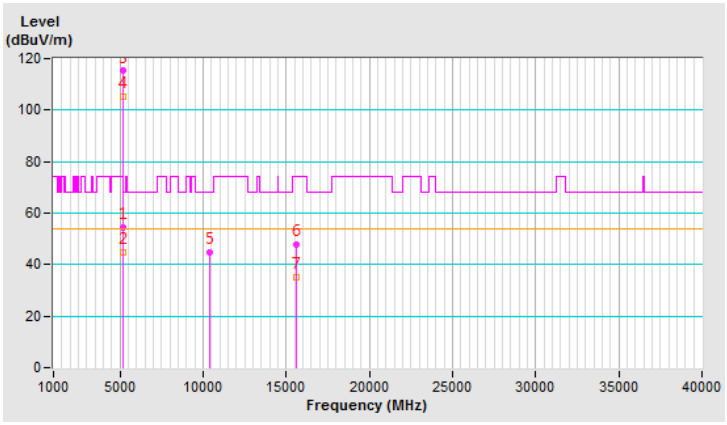


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 48：5.24 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	23℃	量 測 場 地 濕 度 ：	67%RH
測 試 日 期 ：	109 年 1 月 22 日	測 試 者 ：	柯其宗

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	54.1 PK	74.0	-19.9	2.38 H	57	51.1	3.0
2	5150.00	41.5 AV	54.0	-12.5	2.38 H	57	38.5	3.0
3	*5240.00	118.4 PK			2.38 H	57	115.8	2.6
4	*5240.00	106.1 AV			2.38 H	57	103.5	2.6
5	5350.00	53.4 PK	74.0	-20.6	2.38 H	57	50.8	2.6
6	5350.00	41.3 AV	54.0	-12.7	2.38 H	57	38.7	2.6
7	#10480.00	46.8 PK	68.2	-21.4	1.74 H	66	34.3	12.5
8	15720.00	46.9 PK	74.0	-27.1	1.64 H	149	34.7	12.2
9	15720.00	34.5 AV	54.0	-19.5	1.64 H	149	22.3	12.2
10	20960.00	-	-	-	-	-	-	-
11	#26200.00	-	-	-	-	-	-	-
12	31440.00	-	-	-	-	-	-	-
13	#36680.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

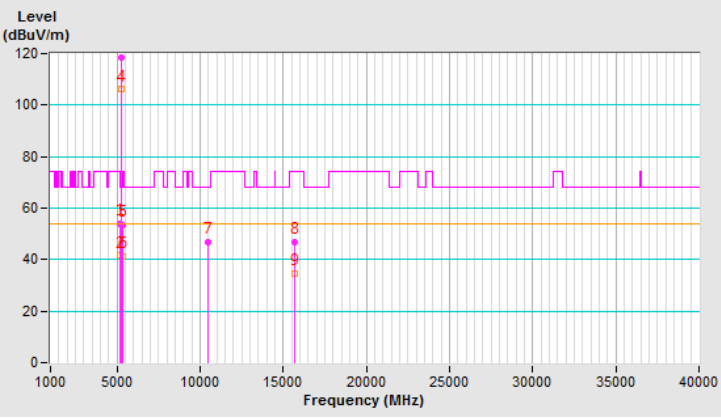


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 48：5.24 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	23℃	量 測 場 地 濕 度 ：	67%RH
測 試 日 期 ：	109 年 1 月 22 日	測 試 者 ：	柯其宗

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	52.8 PK	74.0	-21.2	2.12 V	339	49.8	3.0
2	5150.00	40.4 AV	54.0	-13.6	2.12 V	339	37.4	3.0
3	*5240.00	115.9 PK			2.22 V	339	113.3	2.6
4	*5240.00	104.3 AV			2.22 V	339	101.7	2.6
5	5350.00	51.8 PK	74.0	-22.2	2.16 V	339	49.2	2.6
6	5350.00	40.8 AV	54.0	-13.2	2.16 V	339	38.2	2.6
7	#10480.00	45.3 PK	68.2	-22.9	2.40 V	134	32.8	12.5
8	15720.00	47.9 PK	74.0	-26.1	2.21 V	141	35.7	12.2
9	15720.00	35.4 AV	54.0	-18.6	2.21 V	141	23.2	12.2
10	20960.00	-	-	-	-	-	-	-
11	#26200.00	-	-	-	-	-	-	-
12	31440.00	-	-	-	-	-	-	-
13	#36680.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

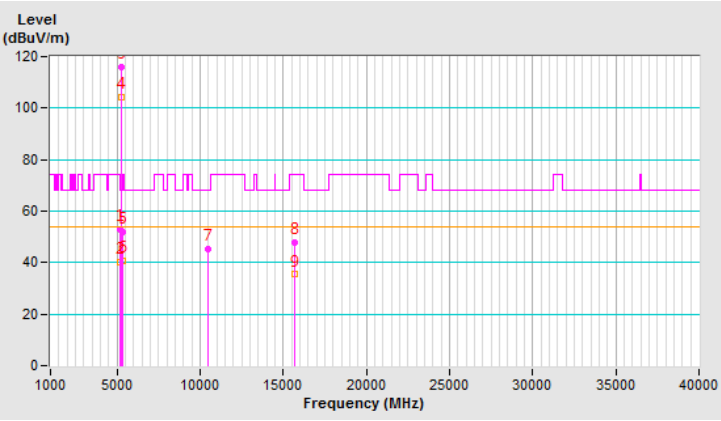


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 52：5.26 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	71%RH
測 試 日 期 ：	109 年 2 月 28 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	52.9 PK	74.0	-21.1	2.37 H	62	49.9	3.0
2	5150.00	43.8 AV	54.0	-10.2	2.37 H	62	40.8	3.0
3	*5260.00	117.1 PK			2.37 H	62	114.6	2.5
4	*5260.00	105.4 AV			2.37 H	62	102.9	2.5
5	#10520.00	44.6 PK	68.2	-23.6	3.61 H	199	32.0	12.6
6	15780.00	46.2 PK	74.0	-27.8	1.54 H	166	34.4	11.8
7	15780.00	35.1 AV	54.0	-18.9	1.54 H	166	23.3	11.8
8	21040.00	-	-	-	-	-	-	-
9	#26300.00	-	-	-	-	-	-	-
10	31560.00	-	-	-	-	-	-	-
11	#36820.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

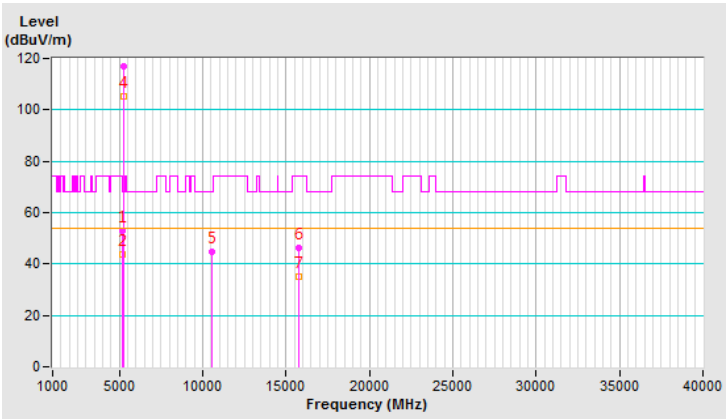


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 52：5.26 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	71%RH
測 試 日 期 ：	109 年 2 月 28 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	52.7 PK	74.0	-21.3	3.09 V	39	49.7	3.0
2	5150.00	42.0 AV	54.0	-12.0	3.09 V	39	39.0	3.0
3	*5260.00	114.7 PK			3.09 V	39	112.2	2.5
4	*5260.00	102.8 AV			3.09 V	39	100.3	2.5
5	#10520.00	43.4 PK	68.2	-24.8	3.15 V	201	30.8	12.6
6	15780.00	45.5 PK	74.0	-28.5	3.58 V	159	33.7	11.8
7	15780.00	34.7 AV	54.0	-19.3	3.58 V	159	22.9	11.8
8	21040.00	-	-	-	-	-	-	-
9	#26300.00	-	-	-	-	-	-	-
10	31560.00	-	-	-	-	-	-	-
11	#36820.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

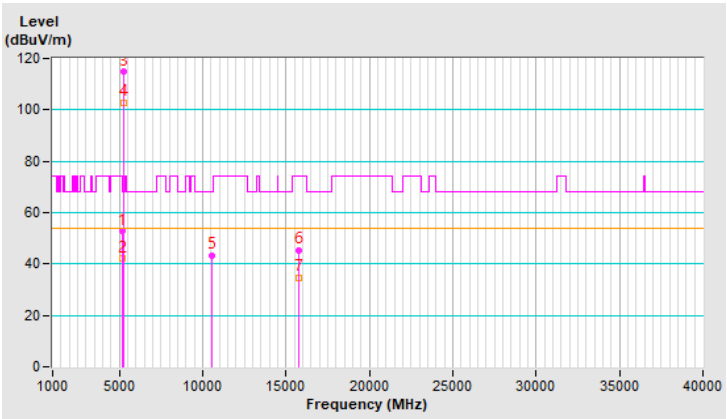


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 60：5.3 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	71%RH
測 試 日 期 ：	109 年 2 月 28 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5300.00	115.9 PK			2.35 H	63	113.5	2.4
2	*5300.00	104.5 AV			2.35 H	63	102.1	2.4
3	5350.00	64.5 PK	74.0	-9.5	2.35 H	63	61.9	2.6
4	5350.00	46.8 AV	54.0	-7.2	2.35 H	63	44.2	2.6
5	10600.00	43.3 PK	74.0	-30.7	3.62 H	200	30.9	12.4
6	10600.00	30.1 AV	54.0	-23.9	3.62 H	200	17.7	12.4
7	15900.00	46.6 PK	74.0	-27.4	1.63 H	159	34.5	12.1
8	15900.00	35.1 AV	54.0	-18.9	1.63 H	159	23.0	12.1
9	21200.00	-	-	-	-	-	-	-
10	#26500.00	-	-	-	-	-	-	-
11	31800.00	-	-	-	-	-	-	-
12	#37100.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

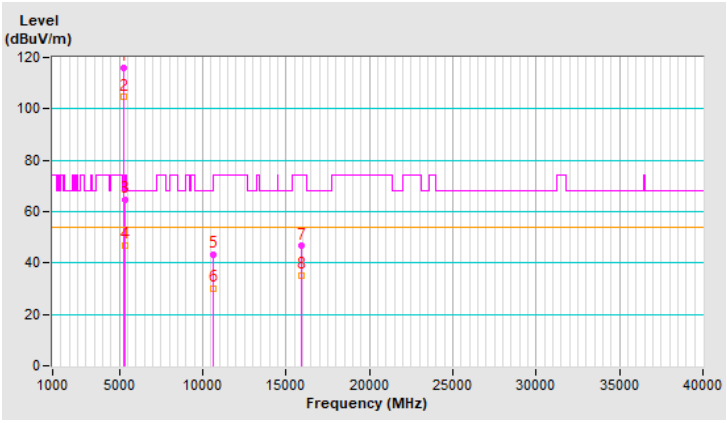


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 60：5.3 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	71%RH
測 試 日 期 ：	109 年 2 月 28 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5300.00	113.4 PK			3.09 V	52	111.0	2.4
2	*5300.00	101.7 AV			3.09 V	52	99.3	2.4
3	5350.00	62.7 PK	74.0	-11.3	3.09 V	52	60.1	2.6
4	5350.00	45.5 AV	54.0	-8.5	3.09 V	52	42.9	2.6
5	10600.00	43.8 PK	74.0	-30.2	3.10 V	203	31.4	12.4
6	10600.00	30.9 AV	54.0	-23.1	3.10 V	203	18.5	12.4
7	15900.00	45.3 PK	74.0	-28.7	3.54 V	150	33.2	12.1
8	15900.00	34.3 AV	54.0	-19.7	3.54 V	150	22.2	12.1
9	21200.00	-	-	-	-	-	-	-
10	#26500.00	-	-	-	-	-	-	-
11	31800.00	-	-	-	-	-	-	-
12	#37100.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

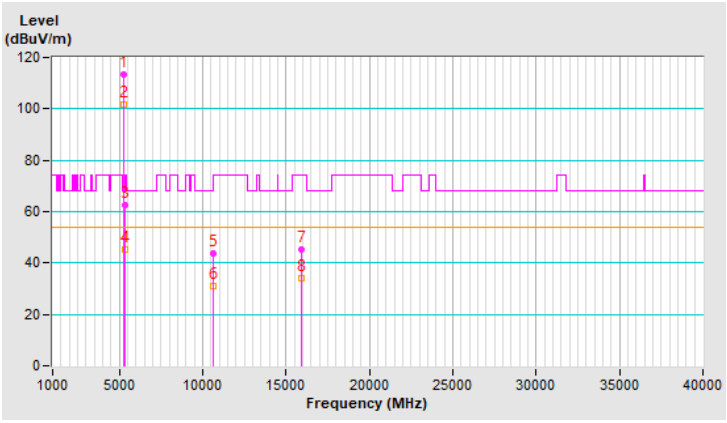


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 64：5.32 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	71%RH
測 試 日 期 ：	109 年 2 月 28 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5320.00	113.8 PK			2.42 H	65	111.3	2.5
2	*5320.00	102.6 AV			2.42 H	65	100.1	2.5
3	5350.00	68.9 PK	74.0	-5.1	2.42 H	65	66.3	2.6
4	5350.00	53.7 AV	54.0	-0.3	2.42 H	65	51.1	2.6
5	10640.00	44.0 PK	74.0	-30.0	3.61 H	211	31.6	12.4
6	10640.00	30.4 AV	54.0	-23.6	3.61 H	211	18.0	12.4
7	15960.00	46.0 PK	74.0	-28.0	1.58 H	185	33.6	12.4
8	15960.00	34.9 AV	54.0	-19.1	1.58 H	185	22.5	12.4
9	21280.00	-	-	-	-	-	-	-
10	#26600.00	-	-	-	-	-	-	-
11	#31920.00	-	-	-	-	-	-	-
12	#37240.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

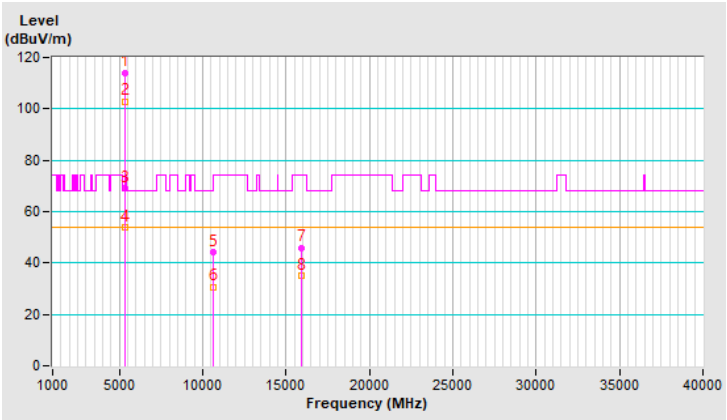


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 64：5.32 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	71%RH
測 試 日 期 ：	109 年 2 月 28 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5320.00	111.0 PK			3.18 V	47	108.5	2.5
2	*5320.00	99.4 AV			3.18 V	47	96.9	2.5
3	5350.00	64.9 PK	74.0	-9.1	3.18 V	47	62.3	2.6
4	5350.00	50.2 AV	54.0	-3.8	3.18 V	47	47.6	2.6
5	10640.00	44.0 PK	74.0	-30.0	3.08 V	183	31.6	12.4
6	10640.00	30.9 AV	54.0	-23.1	3.08 V	183	18.5	12.4
7	15960.00	45.1 PK	74.0	-28.9	3.60 V	161	32.7	12.4
8	15960.00	34.1 AV	54.0	-19.9	3.60 V	161	21.7	12.4
9	21280.00	-	-	-	-	-	-	-
10	#26600.00	-	-	-	-	-	-	-
11	#31920.00	-	-	-	-	-	-	-
12	#37240.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

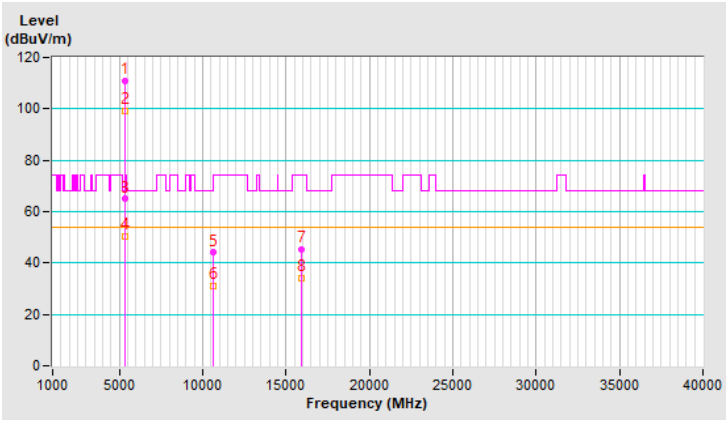


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 100：5.5 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	71%RH
測 試 日 期 ：	109 年 2 月 28 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	54.6 PK	74.0	-19.4	2.31 H	58	51.6	3.0
2	5460.00	41.8 AV	54.0	-12.2	2.31 H	58	38.8	3.0
3	#5470.00	67.9 PK	68.2	-0.3	2.31 H	58	64.8	3.1
4	*5500.00	114.4 PK			2.31 H	58	111.3	3.1
5	*5500.00	102.2 AV			2.31 H	58	99.1	3.1
6	11000.00	43.7 PK	74.0	-30.3	3.62 H	195	31.1	12.6
7	11000.00	30.2 AV	54.0	-23.8	3.62 H	195	17.6	12.6
8	#16500.00	46.5 PK	68.2	-21.7	1.56 H	159	32.9	13.6
9	#22000.00	-	-	-	-	-	-	-
10	#27500.00	-	-	-	-	-	-	-
11	#33000.00	-	-	-	-	-	-	-
12	#38500.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

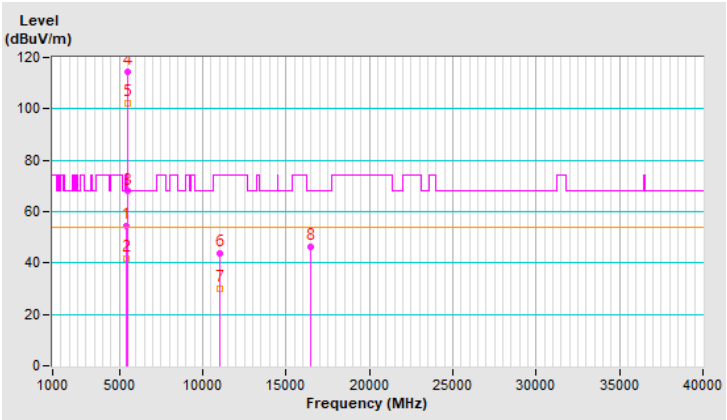


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 100：5.5 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	71%RH
測 試 日 期 ：	109 年 2 月 28 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	54.3 PK	74.0	-19.7	3.08 V	32	51.3	3.0
2	5460.00	41.4 AV	54.0	-12.6	3.08 V	32	38.4	3.0
3	#5470.00	65.4 PK	68.2	-2.8	3.08 V	32	62.3	3.1
4	*5500.00	111.1 PK			3.08 V	32	108.0	3.1
5	*5500.00	99.0 AV			3.08 V	32	95.9	3.1
6	11000.00	43.5 PK	74.0	-30.5	3.07 V	196	30.9	12.6
7	11000.00	30.6 AV	54.0	-23.4	3.07 V	196	18.0	12.6
8	#16500.00	45.9 PK	68.2	-22.3	3.55 V	170	32.3	13.6
9	#22000.00	-	-	-	-	-	-	-
10	#27500.00	-	-	-	-	-	-	-
11	#33000.00	-	-	-	-	-	-	-
12	#38500.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

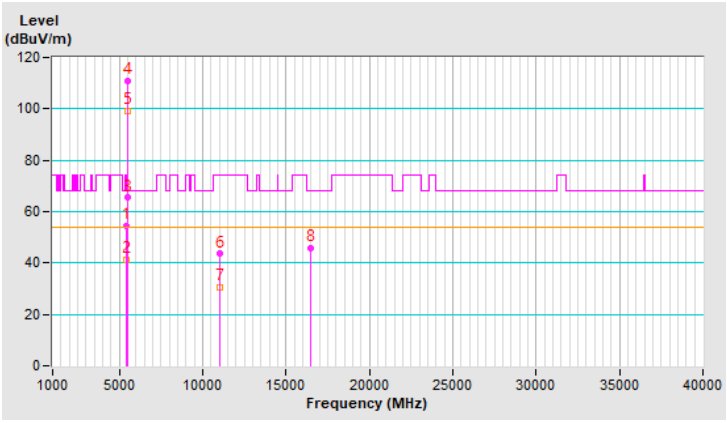


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 116：5.58 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	71%RH
測 試 日 期 ：	109 年 2 月 28 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	53.3 PK	74.0	-20.7	2.33 H	57	50.3	3.0
2	5460.00	40.9 AV	54.0	-13.1	2.33 H	57	37.9	3.0
3	#5470.00	54.3 PK	68.2	-13.9	2.33 H	57	51.2	3.1
4	*5580.00	118.3 PK			2.33 H	57	115.3	3.0
5	*5580.00	106.3 AV			2.33 H	57	103.3	3.0
6	11160.00	43.5 PK	74.0	-30.5	3.60 H	208	31.1	12.4
7	11160.00	30.3 AV	54.0	-23.7	3.60 H	208	17.9	12.4
8	#16740.00	46.4 PK	68.2	-21.8	1.56 H	164	31.6	14.8
9	22320.00	-	-	-	-	-	-	-
10	#27900.00	-	-	-	-	-	-	-
11	#33480.00	-	-	-	-	-	-	-
12	39060.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

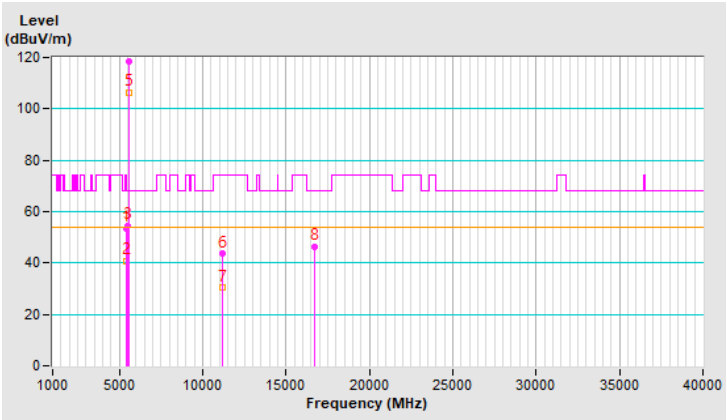


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 116：5.58 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	71%RH
測 試 日 期 ：	109 年 2 月 28 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	53.0 PK	74.0	-21.0	3.15 V	37	50.0	3.0
2	5460.00	39.6 AV	54.0	-14.4	3.15 V	37	36.6	3.0
3	#5470.00	53.8 PK	68.2	-14.4	3.15 V	37	50.7	3.1
4	*5580.00	113.3 PK			3.15 V	37	110.3	3.0
5	*5580.00	101.6 AV			3.15 V	37	98.6	3.0
6	11160.00	44.0 PK	74.0	-30.0	3.09 V	195	31.6	12.4
7	11160.00	30.7 AV	54.0	-23.3	3.09 V	195	18.3	12.4
8	#16740.00	46.0 PK	68.2	-22.2	3.52 V	169	31.2	14.8
9	22320.00	-	-	-	-	-	-	-
10	#27900.00	-	-	-	-	-	-	-
11	#33480.00	-	-	-	-	-	-	-
12	39060.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

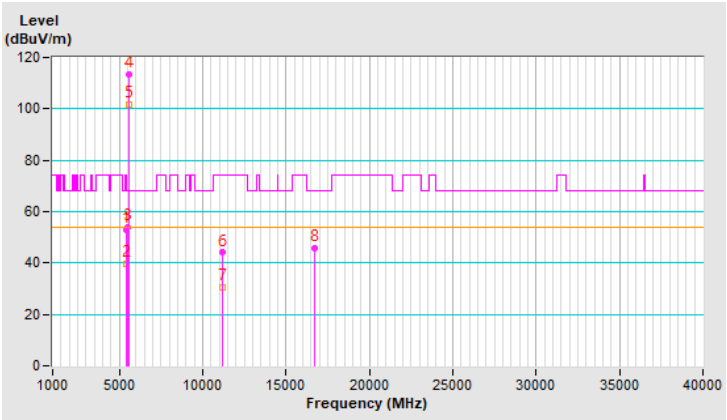


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 140：5.7 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	71%RH
測 試 日 期 ：	109 年 2 月 28 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5700.00	112.6 PK			2.29 H	44	109.4	3.2
2	*5700.00	101.1 AV			2.29 H	44	97.9	3.2
3	#5725.00	67.9 PK	68.2	-0.3	2.29 H	44	64.6	3.3
4	11400.00	44.1 PK	74.0	-29.9	3.59 H	206	31.1	13.0
5	11400.00	30.7 AV	54.0	-23.3	3.59 H	206	17.7	13.0
6	#17100.00	46.6 PK	68.2	-21.6	1.56 H	186	30.3	16.3
7	22800.00	-	-	-	-	-	-	-
8	#28500.00	-	-	-	-	-	-	-
9	#34200.00	-	-	-	-	-	-	-
10	39900.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

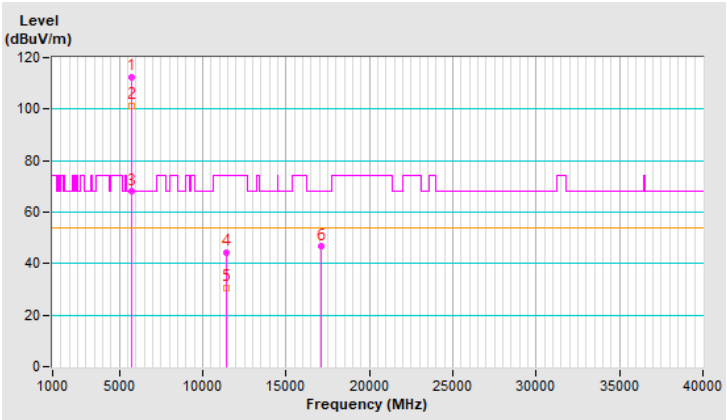


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 140：5.7 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	71%RH
測 試 日 期 ：	109 年 2 月 28 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5700.00	110.8 PK			3.07 V	48	107.6	3.2
2	*5700.00	99.0 AV			3.07 V	48	95.8	3.2
3	#5725.00	64.3 PK	68.2	-3.9	3.07 V	48	61.0	3.3
4	11400.00	44.4 PK	74.0	-29.6	3.15 V	208	31.4	13.0
5	11400.00	31.3 AV	54.0	-22.7	3.15 V	208	18.3	13.0
6	#17100.00	45.4 PK	68.2	-22.8	3.57 V	153	29.1	16.3
7	22800.00	-	-	-	-	-	-	-
8	#28500.00	-	-	-	-	-	-	-
9	#34200.00	-	-	-	-	-	-	-
10	39900.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

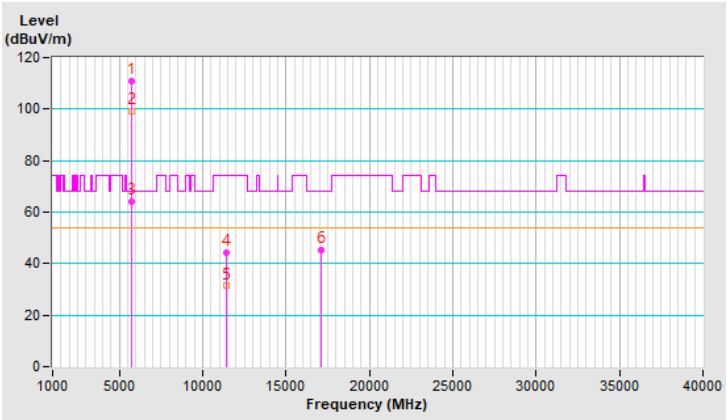


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 144：5.72 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	71%RH
測 試 日 期 ：	109 年 2 月 28 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	51.7 PK	74.0	-22.3	1.50 H	47	48.7	3.0
2	5460.00	38.5 AV	54.0	-15.5	1.50 H	47	35.5	3.0
3	#5470.00	52.0 PK	68.2	-16.2	1.50 H	47	48.9	3.1
4	*5720.00	118.3 PK			1.50 H	47	115.1	3.2
5	*5720.00	105.1 AV			1.50 H	47	101.9	3.2
6	#5850.00	53.1 PK	68.2	-15.1	1.50 H	47	49.4	3.7
7	11440.00	43.7 PK	74.0	-30.3	3.53 H	201	30.9	12.8
8	11440.00	30.7 AV	54.0	-23.3	3.53 H	201	17.9	12.8
9	#17160.00	46.8 PK	68.2	-21.4	1.63 H	180	30.2	16.6
10	22880.00	-	-	-	-	-	-	-
11	#28600.00	-	-	-	-	-	-	-
12	#34320.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

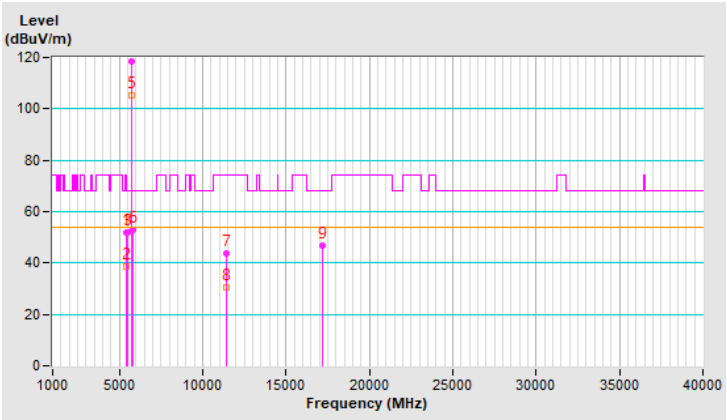


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 144：5.72 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	71%RH
測 試 日 期 ：	109 年 2 月 28 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	51.3 PK	74.0	-22.7	3.17 V	44	48.3	3.0
2	5460.00	37.9 AV	54.0	-16.1	3.17 V	44	34.9	3.0
3	#5470.00	52.0 PK	68.2	-16.2	3.17 V	44	48.9	3.1
4	*5720.00	113.1 PK			3.17 V	44	109.9	3.2
5	*5720.00	101.2 AV			3.17 V	44	98.0	3.2
6	#5850.00	53.3 PK	68.2	-14.9	3.17 V	44	49.6	3.7
7	11440.00	44.6 PK	74.0	-29.4	3.14 V	187	31.8	12.8
8	11440.00	31.4 AV	54.0	-22.6	3.14 V	187	18.6	12.8
9	#17160.00	45.3 PK	68.2	-22.9	3.56 V	170	28.7	16.6
10	22880.00	-	-	-	-	-	-	-
11	#28600.00	-	-	-	-	-	-	-
12	#34320.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

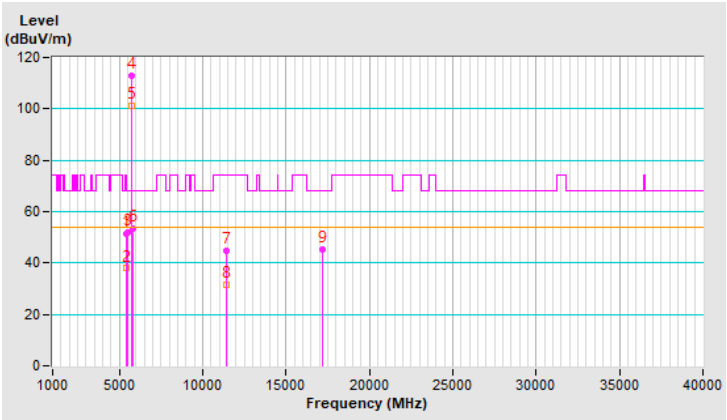


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 149：5.745 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	23℃	量 測 場 地 濕 度 ：	67%RH
測 試 日 期 ：	109 年 1 月 22 日	測 試 者 ：	柯其宗

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5745.00	116.6 PK			1.43 H	59	113.3	3.3
2	*5745.00	105.7 AV			1.43 H	59	102.4	3.3
3	11490.00	47.6 PK	74.0	-26.4	1.77 H	48	35.0	12.6
4	11490.00	34.6 AV	54.0	-19.4	1.77 H	48	22.0	12.6
5	#17235.00	47.6 PK	68.2	-20.6	1.64 H	139	30.8	16.8
6	22980.00	-	-	-	-	-	-	-
7	#28725.00	-	-	-	-	-	-	-
8	#34470.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

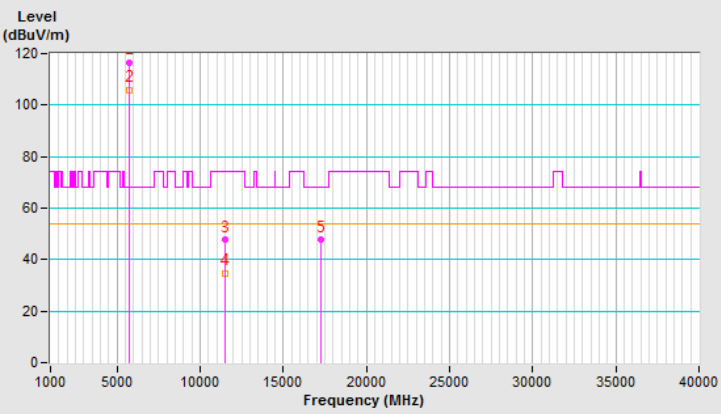


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 149：5.745 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	23℃	量 測 場 地 濕 度 ：	67%RH
測 試 日 期 ：	109 年 1 月 22 日	測 試 者 ：	柯其宗

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5745.00	115.6 PK			3.93 V	351	112.3	3.3
2	*5745.00	104.9 AV			3.93 V	351	101.6	3.3
3	11490.00	44.6 PK	74.0	-29.4	2.34 V	128	32.0	12.6
4	11490.00	33.5 AV	54.0	-20.5	2.34 V	128	20.9	12.6
5	#17235.00	47.2 PK	68.2	-21.0	2.25 V	142	30.4	16.8
6	22980.00	-	-	-	-	-	-	-
7	#28725.00	-	-	-	-	-	-	-
8	#34470.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

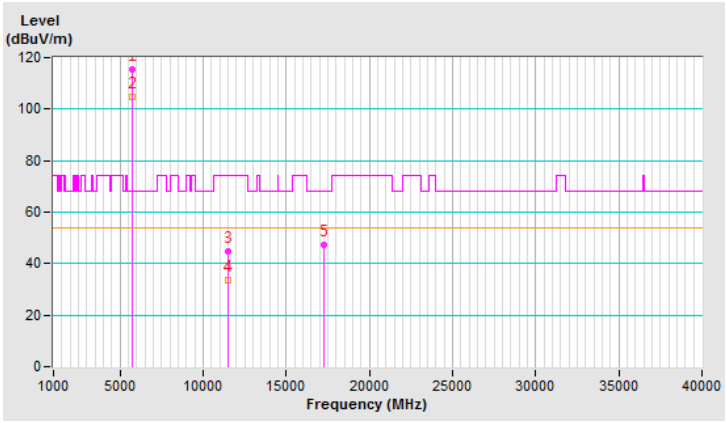


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 157：5.785 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	23℃	量 測 場 地 濕 度 ：	67%RH
測 試 日 期 ：	109 年 1 月 22 日	測 試 者 ：	柯其宗

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5785.00	117.5 PK			1.52 H	44	114.1	3.4
2	*5785.00	106.3 AV			1.52 H	44	102.9	3.4
3	11570.00	46.9 PK	74.0	-27.1	1.78 H	65	34.7	12.2
4	11570.00	34.3 AV	54.0	-19.7	1.78 H	65	22.1	12.2
5	#17355.00	47.2 PK	68.2	-21.0	1.61 H	132	30.6	16.6
6	#23140.00	-	-	-	-	-	-	-
7	#28925.00	-	-	-	-	-	-	-
8	#34710.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

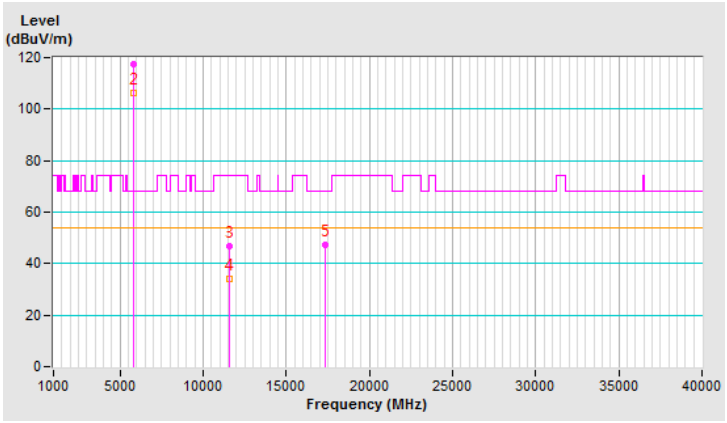


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 157：5.785 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	23℃	量 測 場 地 濕 度 ：	67%RH
測 試 日 期 ：	109 年 1 月 22 日	測 試 者 ：	柯其宗

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5785.00	105.2 PK			3.87 V	347	101.8	3.4
2	*5785.00	104.4 AV			3.87 V	347	101.0	3.4
3	11570.00	44.5 PK	74.0	-29.5	2.35 V	134	32.3	12.2
4	11570.00	33.3 AV	54.0	-20.7	2.35 V	134	21.1	12.2
5	#17355.00	48.1 PK	68.2	-20.1	2.26 V	151	31.5	16.6
6	#23140.00	-	-	-	-	-	-	-
7	#28925.00	-	-	-	-	-	-	-
8	#34710.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

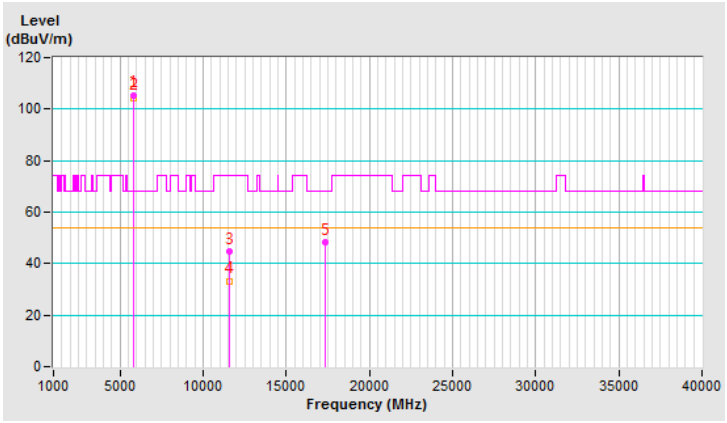


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 165：5.825 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	23℃	量 測 場 地 濕 度 ：	67%RH
測 試 日 期 ：	109 年 1 月 22 日	測 試 者 ：	柯其宗

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5825.00	117.7 PK			1.47 H	46	114.1	3.6
2	*5825.00	106.5 AV			1.47 H	46	102.9	3.6
3	11650.00	47.5 PK	74.0	-26.5	1.70 H	71	35.1	12.4
4	11650.00	34.6 AV	54.0	-19.4	1.70 H	71	22.2	12.4
5	#17475.00	46.9 PK	68.2	-21.3	1.61 H	156	29.9	17.0
6	#23300.00	-	-	-	-	-	-	-
7	#29125.00	-	-	-	-	-	-	-
8	#34950.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

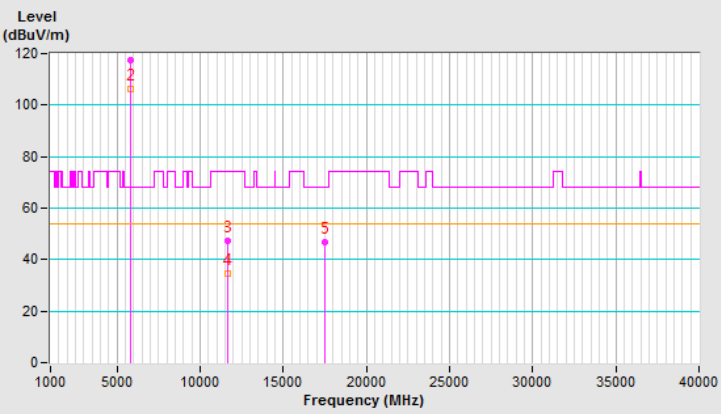


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 165：5.825 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	23℃	量 測 場 地 濕 度 ：	67%RH
測 試 日 期 ：	109 年 1 月 22 日	測 試 者 ：	柯其宗

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5825.00	105.9 PK			4.00 V	345	102.3	3.6
2	*5825.00	104.6 AV			4.00 V	345	101.0	3.6
3	11650.00	45.0 PK	74.0	-29.0	2.34 V	130	32.6	12.4
4	11650.00	33.7 AV	54.0	-20.3	2.34 V	130	21.3	12.4
5	#17475.00	47.6 PK	68.2	-20.6	2.26 V	123	30.6	17.0
6	#23300.00	-	-	-	-	-	-	-
7	#29125.00	-	-	-	-	-	-	-
8	#34950.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

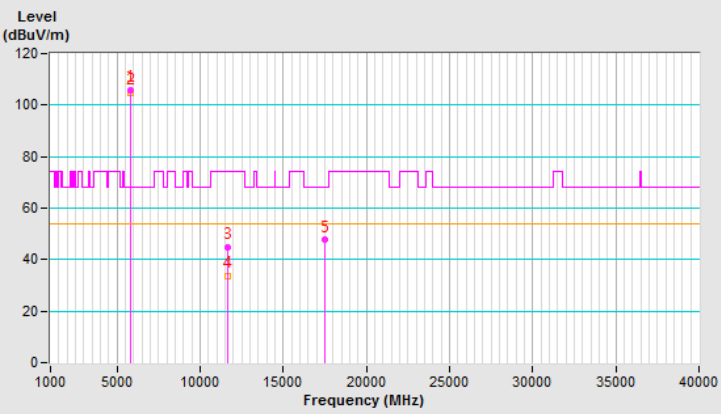


802.11ax (HE40)

操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 38：5.19 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=2kHz
量 測 場 地 溫 度 ：	23℃	量 測 場 地 濕 度 ：	67%RH
測 試 日 期 ：	109 年 1 月 22 日	測 試 者 ：	柯其宗

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	70.2 PK	74.0	-3.8	2.43 H	63	67.2	3.0
2	5150.00	53.8 AV	54.0	-0.2	2.43 H	63	50.8	3.0
3	*5190.00	111.3 PK			2.43 H	63	108.4	2.9
4	*5190.00	99.4 AV			2.43 H	63	96.5	2.9
5	#10380.00	47.3 PK	68.2	-20.9	1.70 H	78	35.1	12.2
6	15570.00	46.5 PK	74.0	-27.5	1.56 H	150	33.5	13.0
7	15570.00	34.3 AV	54.0	-19.7	1.56 H	150	21.3	13.0
8	20760.00	-	-	-	-	-	-	-
9	#25950.00	-	-	-	-	-	-	-
10	#31140.00	-	-	-	-	-	-	-
11	#36330.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

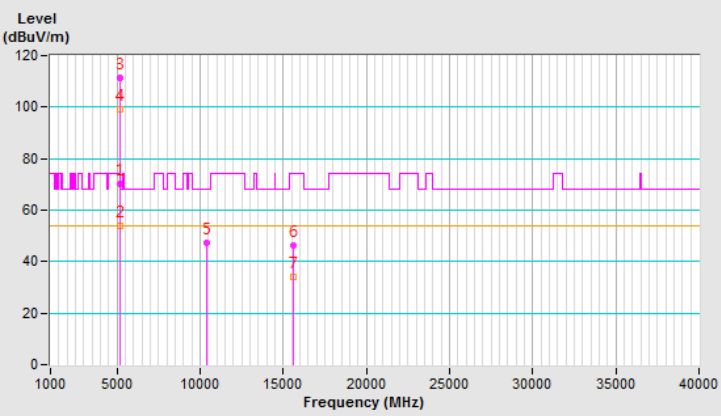


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 38：5.19 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=2kHz
量 測 場 地 溫 度 ：	23℃	量 測 場 地 濕 度 ：	67%RH
測 試 日 期 ：	109 年 1 月 22 日	測 試 者 ：	柯其宗

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	67.7 PK	74.0	-6.3	2.12 V	356	64.7	3.0
2	5150.00	50.1 AV	54.0	-3.9	2.12 V	356	47.1	3.0
3	*5190.00	109.4 PK			2.12 V	356	106.5	2.9
4	*5190.00	97.2 AV			2.12 V	356	94.3	2.9
5	#10380.00	44.7 PK	68.2	-23.5	2.37 V	137	32.5	12.2
6	15570.00	47.4 PK	74.0	-26.6	2.29 V	143	34.4	13.0
7	15570.00	34.9 AV	54.0	-19.1	2.29 V	143	21.9	13.0
8	20760.00	-	-	-	-	-	-	-
9	#25950.00	-	-	-	-	-	-	-
10	#31140.00	-	-	-	-	-	-	-
11	#36330.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

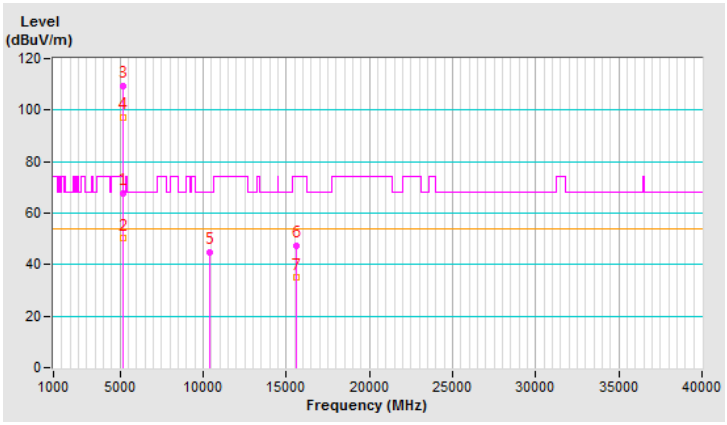


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 46：5.23 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=2kHz
量 測 場 地 溫 度 ：	23℃	量 測 場 地 濕 度 ：	67%RH
測 試 日 期 ：	109 年 1 月 22 日	測 試 者 ：	柯其宗

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	67.4 PK	74.0	-6.6	2.37 H	62	64.4	3.0
2	5150.00	53.9 AV	54.0	-0.1	2.37 H	62	50.9	3.0
3	*5230.00	114.7 PK			2.37 H	62	112.1	2.6
4	*5230.00	103.4 AV			2.37 H	62	100.8	2.6
5	5350.00	58.7 PK	74.0	-15.3	2.37 H	62	56.1	2.6
6	5350.00	44.2 AV	54.0	-9.8	2.37 H	62	41.6	2.6
7	#10460.00	47.0 PK	68.2	-21.2	1.77 H	67	34.6	12.4
8	15690.00	47.0 PK	74.0	-27.0	1.58 H	132	34.6	12.4
9	15690.00	34.6 AV	54.0	-19.4	1.58 H	132	22.2	12.4
10	20920.00	-	-	-	-	-	-	-
11	#26150.00	-	-	-	-	-	-	-
12	31380.00	-	-	-	-	-	-	-
13	#36610.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

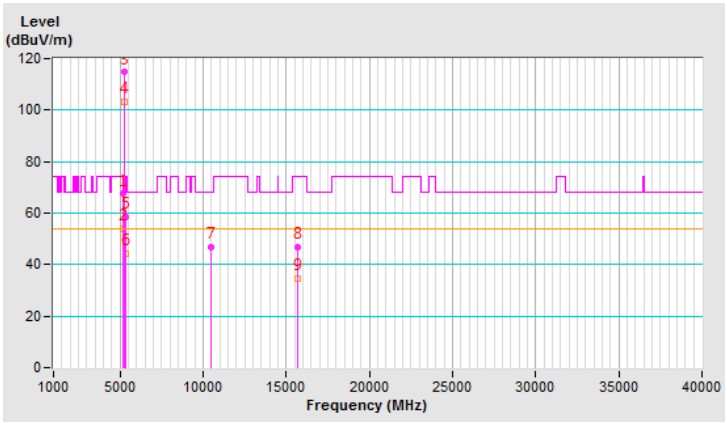


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 46：5.23 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=2kHz
量 測 場 地 溫 度 ：	23℃	量 測 場 地 濕 度 ：	67%RH
測 試 日 期 ：	109 年 1 月 22 日	測 試 者 ：	柯其宗

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	63.9 PK	74.0	-10.1	2.12 V	340	60.9	3.0
2	5150.00	49.6 AV	54.0	-4.4	2.12 V	340	46.6	3.0
3	*5230.00	112.3 PK			2.12 V	340	109.7	2.6
4	*5230.00	100.8 AV			2.12 V	340	98.2	2.6
5	5350.00	56.1 PK	74.0	-17.9	2.12 V	340	53.5	2.6
6	5350.00	42.3 AV	54.0	-11.7	2.12 V	340	39.7	2.6
7	#10460.00	45.7 PK	68.2	-22.5	2.38 V	145	33.3	12.4
8	15690.00	47.5 PK	74.0	-26.5	2.27 V	153	35.1	12.4
9	15690.00	34.9 AV	54.0	-19.1	2.27 V	153	22.5	12.4
10	20920.00	-	-	-	-	-	-	-
11	#26150.00	-	-	-	-	-	-	-
12	31380.00	-	-	-	-	-	-	-
13	#36610.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

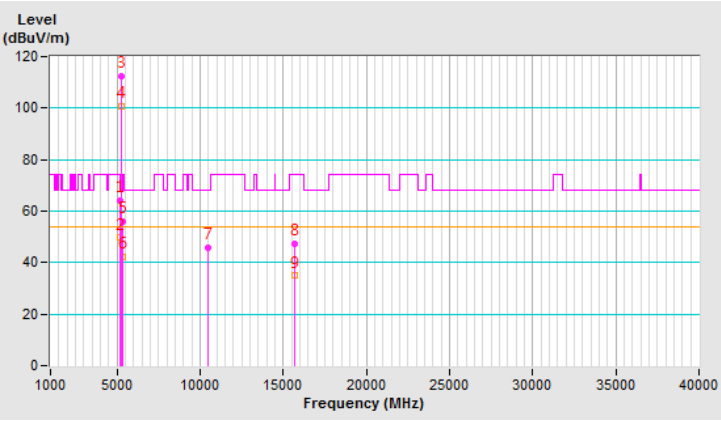


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 54：5.27 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=2kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	71%RH
測 試 日 期 ：	109 年 2 月 28 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	55.7 PK	74.0	-18.3	2.34 H	55	52.7	3.0
2	5150.00	45.9 AV	54.0	-8.1	2.34 H	55	42.9	3.0
3	*5270.00	115.7 PK			2.34 H	55	113.2	2.5
4	*5270.00	103.4 AV			2.34 H	55	100.9	2.5
5	5350.00	63.7 PK	74.0	-10.3	2.34 H	55	61.1	2.6
6	5350.00	49.6 AV	54.0	-4.4	2.34 H	55	47.0	2.6
7	#10540.00	44.2 PK	68.2	-24.0	3.62 H	208	31.6	12.6
8	15810.00	47.2 PK	74.0	-26.8	1.64 H	181	35.5	11.7
9	15810.00	35.9 AV	54.0	-18.1	1.64 H	181	24.2	11.7
10	21080.00	-	-	-	-	-	-	-
11	#26350.00	-	-	-	-	-	-	-
12	31620.00	-	-	-	-	-	-	-
13	#36890.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

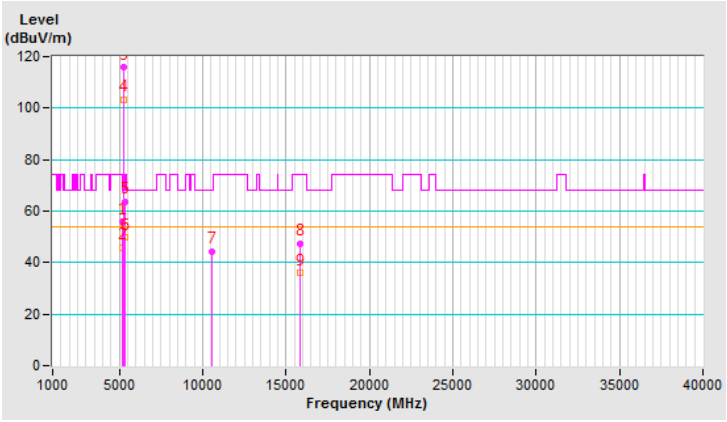


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 54：5.27 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=2kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	71%RH
測 試 日 期 ：	109 年 2 月 28 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	52.5 PK	74.0	-21.5	3.16 V	46	49.5	3.0
2	5150.00	42.5 AV	54.0	-11.5	3.16 V	46	39.5	3.0
3	*5270.00	113.5 PK			3.16 V	46	111.0	2.5
4	*5270.00	100.0 AV			3.16 V	46	97.5	2.5
5	5350.00	61.3 PK	74.0	-12.7	3.16 V	46	58.7	2.6
6	5350.00	47.6 AV	54.0	-6.4	3.16 V	46	45.0	2.6
7	#10540.00	44.2 PK	68.2	-24.0	3.15 V	206	31.6	12.6
8	15810.00	44.9 PK	74.0	-29.1	3.55 V	174	33.2	11.7
9	15810.00	34.0 AV	54.0	-20.0	3.55 V	174	22.3	11.7
10	21080.00	-	-	-	-	-	-	-
11	#26350.00	-	-	-	-	-	-	-
12	31620.00	-	-	-	-	-	-	-
13	#36890.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

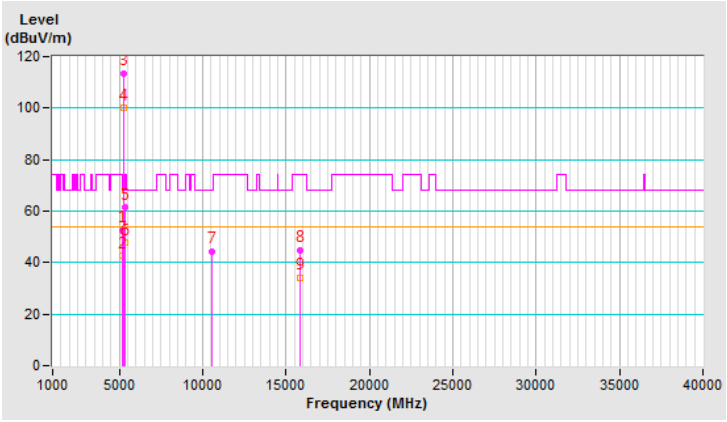


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 62：5.31 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=2kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	71%RH
測 試 日 期 ：	109 年 2 月 28 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5310.00	112.7 PK			2.35 H	64	110.3	2.4
2	*5310.00	100.2 AV			2.35 H	64	97.8	2.4
3	5350.00	73.3 PK	74.0	-0.7	2.35 H	64	70.7	2.6
4	5350.00	53.9 AV	54.0	-0.1	2.35 H	64	51.3	2.6
5	10620.00	44.0 PK	74.0	-30.0	3.61 H	216	31.6	12.4
6	10620.00	30.8 AV	54.0	-23.2	3.61 H	216	18.4	12.4
7	15930.00	47.0 PK	74.0	-27.0	1.59 H	182	34.8	12.2
8	15930.00	35.9 AV	54.0	-18.1	1.59 H	182	23.7	12.2
9	21240.00	-	-	-	-	-	-	-
10	#26550.00	-	-	-	-	-	-	-
11	#31860.00	-	-	-	-	-	-	-
12	#37170.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

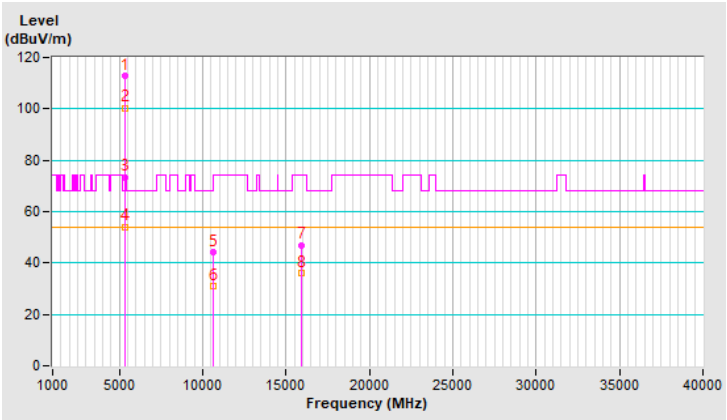


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 62：5.31 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=2kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	71%RH
測 試 日 期 ：	109 年 2 月 28 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5310.00	110.0 PK			3.16 V	42	107.6	2.4
2	*5310.00	97.4 AV			3.16 V	42	95.0	2.4
3	5350.00	63.0 PK	74.0	-11.0	3.16 V	42	60.4	2.6
4	5350.00	49.2 AV	54.0	-4.8	3.16 V	42	46.6	2.6
5	10620.00	44.4 PK	74.0	-29.6	3.07 V	212	32.0	12.4
6	10620.00	31.1 AV	54.0	-22.9	3.07 V	212	18.7	12.4
7	15930.00	45.7 PK	74.0	-28.3	3.53 V	179	33.5	12.2
8	15930.00	34.6 AV	54.0	-19.4	3.53 V	179	22.4	12.2
9	21240.00	-	-	-	-	-	-	-
10	#26550.00	-	-	-	-	-	-	-
11	#31860.00	-	-	-	-	-	-	-
12	#37170.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

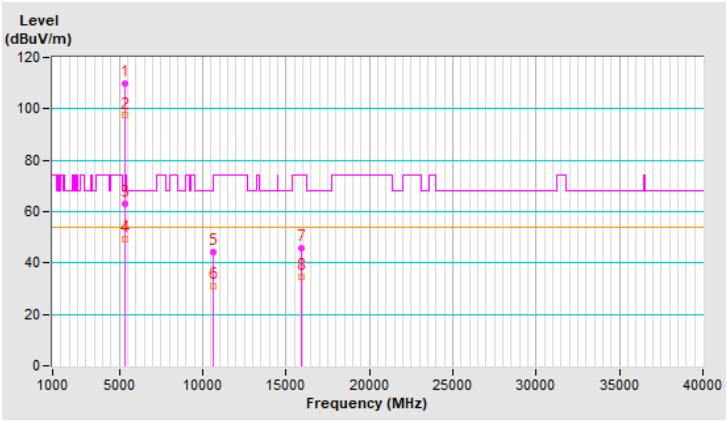


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 102 : 5.51 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=2kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	71%RH
測 試 日 期 ：	109 年 2 月 28 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	63.7 PK	74.0	-10.3	2.25 H	78	60.7	3.0
2	5460.00	45.3 AV	54.0	-8.7	2.25 H	78	42.3	3.0
3	#5470.00	68.0 PK	68.2	-0.2	2.25 H	78	64.9	3.1
4	*5510.00	107.4 PK			2.25 H	78	104.3	3.1
5	*5510.00	97.2 AV			2.25 H	78	94.1	3.1
6	11020.00	44.2 PK	74.0	-29.8	3.54 H	197	31.7	12.5
7	11020.00	31.1 AV	54.0	-22.9	3.54 H	197	18.6	12.5
8	#16530.00	46.5 PK	68.2	-21.7	1.58 H	183	32.6	13.9
9	22040.00	-	-	-	-	-	-	-
10	#27550.00	-	-	-	-	-	-	-
11	#33060.00	-	-	-	-	-	-	-
12	#38570.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

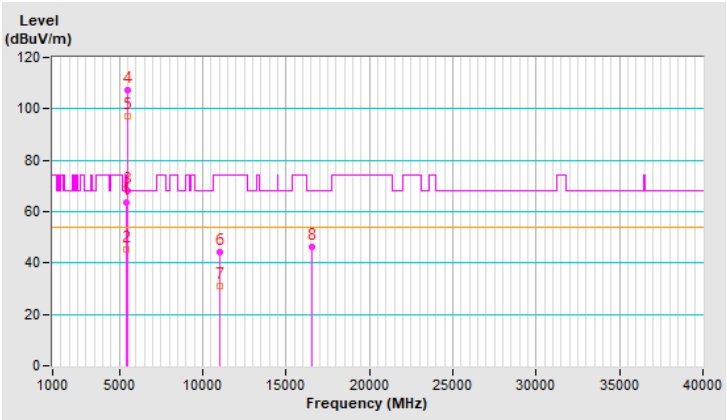


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 102：5.51 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=2kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	71%RH
測 試 日 期 ：	109 年 2 月 28 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	62.1 PK	74.0	-11.9	3.19 V	49	59.1	3.0
2	5460.00	44.7 AV	54.0	-9.3	3.19 V	49	41.7	3.0
3	#5470.00	65.7 PK	68.2	-2.5	3.19 V	49	62.6	3.1
4	*5510.00	104.8 PK			3.19 V	49	101.7	3.1
5	*5510.00	94.4 AV			3.19 V	49	91.3	3.1
6	11020.00	44.1 PK	74.0	-29.9	3.18 V	213	31.6	12.5
7	11020.00	31.0 AV	54.0	-23.0	3.18 V	213	18.5	12.5
8	#16530.00	44.7 PK	68.2	-23.5	3.54 V	163	30.8	13.9
9	22040.00	-	-	-	-	-	-	-
10	#27550.00	-	-	-	-	-	-	-
11	#33060.00	-	-	-	-	-	-	-
12	#38570.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

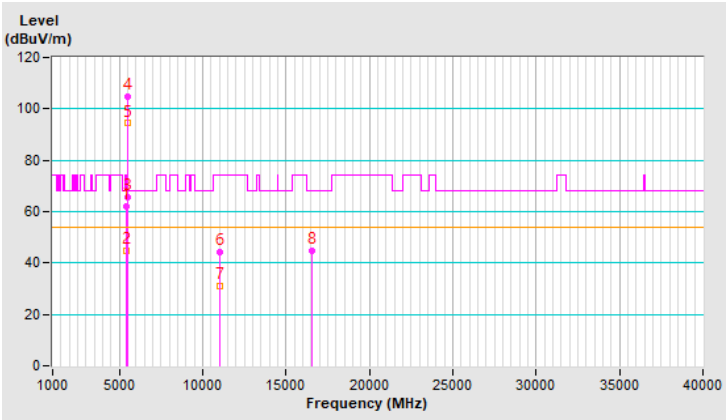


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 110：5.55 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=2kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	71%RH
測 試 日 期 ：	109 年 2 月 28 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5550.00	115.3 PK			2.36 H	47	112.3	3.0
2	*5550.00	103.2 AV			2.36 H	47	100.2	3.0
3	11100.00	43.2 PK	74.0	-30.8	3.55 H	194	30.9	12.3
4	11100.00	30.2 AV	54.0	-23.8	3.55 H	194	17.9	12.3
5	#16650.00	46.3 PK	68.2	-21.9	1.65 H	176	31.7	14.6
6	22200.00	-	-	-	-	-	-	-
7	#27750.00	-	-	-	-	-	-	-
8	#33300.00	-	-	-	-	-	-	-
9	38850.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

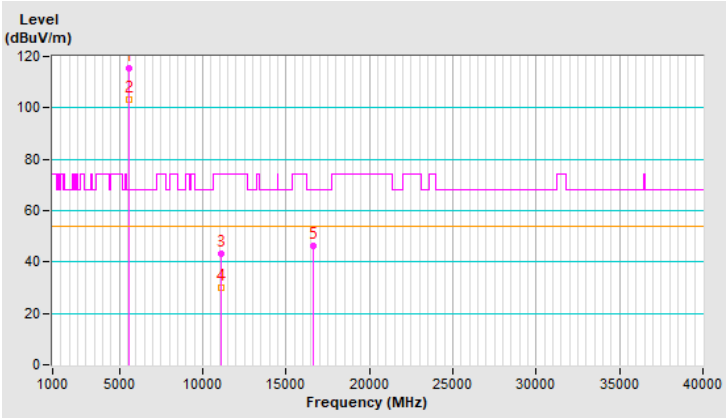


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 110：5.55 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=2kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	71%RH
測 試 日 期 ：	109 年 2 月 28 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5550.00	113.2 PK			3.17 V	40	110.2	3.0
2	*5550.00	99.9 AV			3.17 V	40	96.9	3.0
3	11100.00	43.9 PK	74.0	-30.1	3.17 V	207	31.6	12.3
4	11100.00	30.9 AV	54.0	-23.1	3.17 V	207	18.6	12.3
5	#16650.00	45.3 PK	68.2	-22.9	3.58 V	153	30.7	14.6
6	22200.00	-	-	-	-	-	-	-
7	#27750.00	-	-	-	-	-	-	-
8	#33300.00	-	-	-	-	-	-	-
9	38850.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

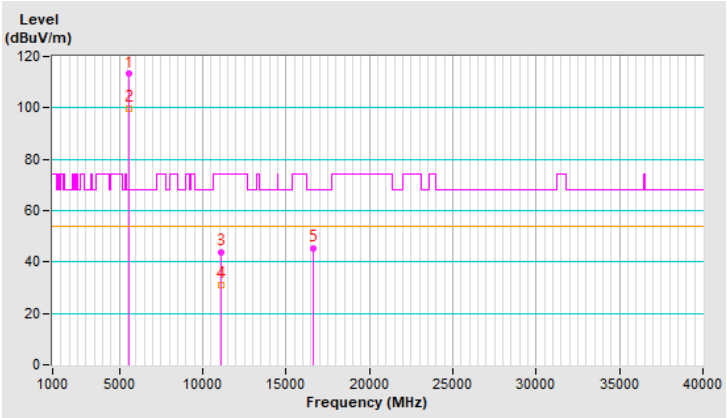


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 134：5.67 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=2kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	71%RH
測 試 日 期 ：	109 年 2 月 28 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5670.00	113.5 PK			2.35 H	51	110.3	3.2
2	*5670.00	101.2 AV			2.35 H	51	98.0	3.2
3	#5725.00	68.1 PK	68.2	-0.1	2.35 H	51	64.8	3.3
4	11340.00	44.0 PK	74.0	-30.0	3.52 H	213	31.1	12.9
5	11340.00	31.0 AV	54.0	-23.0	3.52 H	213	18.1	12.9
6	#17010.00	46.9 PK	68.2	-21.3	1.58 H	174	31.0	15.9
7	22680.00	-	-	-	-	-	-	-
8	#28350.00	-	-	-	-	-	-	-
9	#34020.00	-	-	-	-	-	-	-
10	39690.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

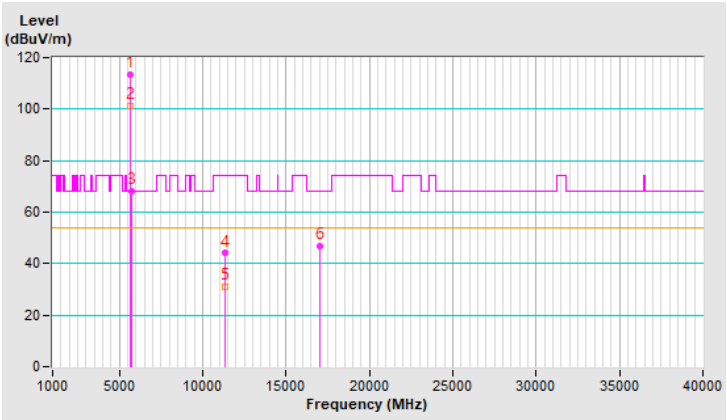


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 134：5.67 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=2kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	71%RH
測 試 日 期 ：	109 年 2 月 28 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5670.00	110.4 PK			3.14 V	47	107.2	3.2
2	*5670.00	98.5 AV			3.14 V	47	95.3	3.2
3	#5725.00	66.3 PK	68.2	-1.9	3.14 V	47	63.0	3.3
4	11340.00	43.7 PK	74.0	-30.3	3.08 V	194	30.8	12.9
5	11340.00	30.7 AV	54.0	-23.3	3.08 V	194	17.8	12.9
6	#17010.00	45.0 PK	68.2	-23.2	3.61 V	153	29.1	15.9
7	22680.00	-	-	-	-	-	-	-
8	#28350.00	-	-	-	-	-	-	-
9	#34020.00	-	-	-	-	-	-	-
10	39690.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

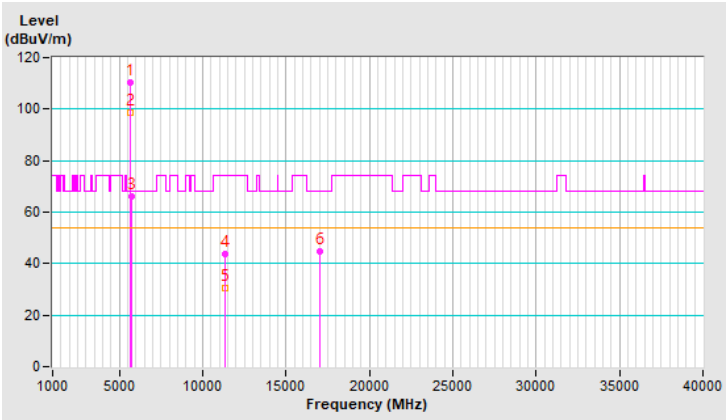


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 142 : 5.71 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=2kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	71%RH
測 試 日 期 ：	109 年 2 月 28 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	51.6 PK	74.0	-22.4	2.31 H	42	48.6	3.0
2	5460.00	39.2 AV	54.0	-14.8	2.31 H	42	36.2	3.0
3	#5470.00	52.5 PK	68.2	-15.7	2.31 H	42	49.4	3.1
4	*5710.00	115.9 PK			2.31 H	42	112.7	3.2
5	*5710.00	103.6 AV			2.31 H	42	100.4	3.2
6	#5850.00	52.6 PK	68.2	-15.6	2.31 H	42	48.9	3.7
7	11420.00	43.9 PK	74.0	-30.1	3.62 H	216	31.0	12.9
8	11420.00	30.4 AV	54.0	-23.6	3.62 H	216	17.5	12.9
9	#17130.00	47.0 PK	68.2	-21.2	1.54 H	178	30.6	16.4
10	22840.00	-	-	-	-	-	-	-
11	#28550.00	-	-	-	-	-	-	-
12	#34260.00	-	-	-	-	-	-	-
13	39970.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

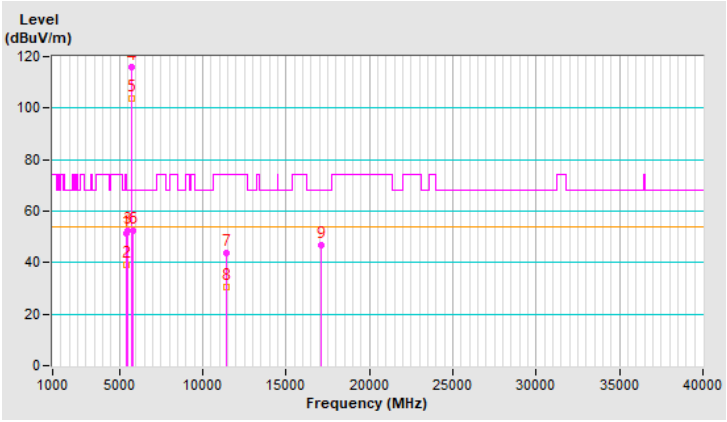


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 142 : 5.71 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=2kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	71%RH
測 試 日 期 ：	109 年 2 月 28 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	51.5 PK	74.0	-22.5	3.16 V	36	48.5	3.0
2	5460.00	38.8 AV	54.0	-15.2	3.16 V	36	35.8	3.0
3	#5470.00	52.2 PK	68.2	-16.0	3.16 V	36	49.1	3.1
4	*5710.00	112.7 PK			3.16 V	36	109.5	3.2
5	*5710.00	99.6 AV			3.16 V	36	96.4	3.2
6	#5850.00	52.5 PK	68.2	-15.7	3.16 V	36	48.8	3.7
7	11420.00	44.4 PK	74.0	-29.6	3.17 V	185	31.5	12.9
8	11420.00	31.0 AV	54.0	-23.0	3.17 V	185	18.1	12.9
9	#17130.00	45.1 PK	68.2	-23.1	3.55 V	158	28.7	16.4
10	22840.00	-	-	-	-	-	-	-
11	#28550.00	-	-	-	-	-	-	-
12	#34260.00	-	-	-	-	-	-	-
13	39970.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

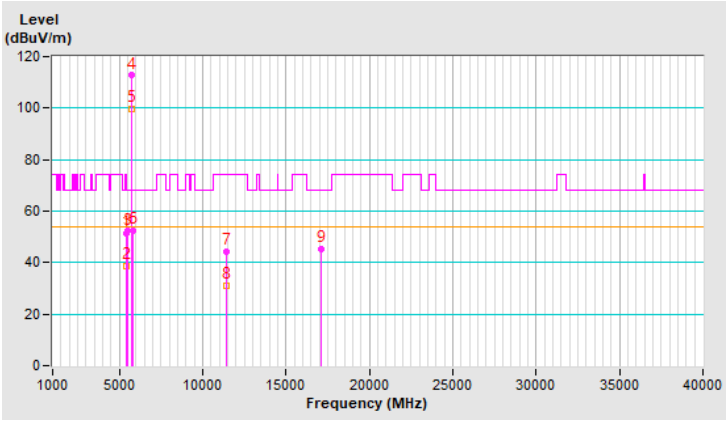


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 151：5.755 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=2kHz
量 測 場 地 溫 度 ：	23℃	量 測 場 地 濕 度 ：	67%RH
測 試 日 期 ：	109 年 1 月 22 日	測 試 者 ：	柯其宗

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5755.00	116.2 PK			1.62 H	45	112.9	3.3
2	*5755.00	103.3 AV			1.62 H	45	100.0	3.3
3	11510.00	46.8 PK	74.0	-27.2	1.74 H	68	34.3	12.5
4	11510.00	34.2 AV	54.0	-19.8	1.74 H	68	21.7	12.5
5	#17265.00	46.9 PK	68.2	-21.3	1.62 H	152	30.3	16.6
6	23020.00	-	-	-	-	-	-	-
7	#28775.00	-	-	-	-	-	-	-
8	#34530.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

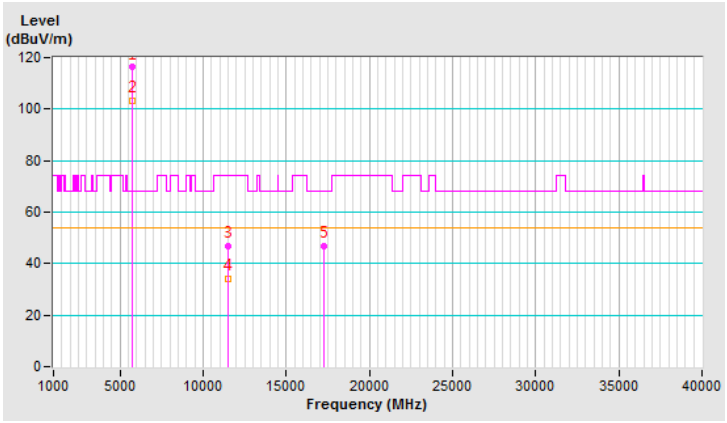


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 151：5.755 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=2kHz
量 測 場 地 溫 度 ：	23℃	量 測 場 地 濕 度 ：	67%RH
測 試 日 期 ：	109 年 1 月 22 日	測 試 者 ：	柯其宗

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5755.00	114.1 PK			3.94 V	3	110.8	3.3
2	*5755.00	102.1 AV			3.94 V	3	98.8	3.3
3	11510.00	45.4 PK	74.0	-28.6	2.32 V	153	32.9	12.5
4	11510.00	33.9 AV	54.0	-20.1	2.32 V	153	21.4	12.5
5	#17265.00	47.4 PK	68.2	-20.8	2.19 V	141	30.8	16.6
6	23020.00	-	-	-	-	-	-	-
7	#28775.00	-	-	-	-	-	-	-
8	#34530.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

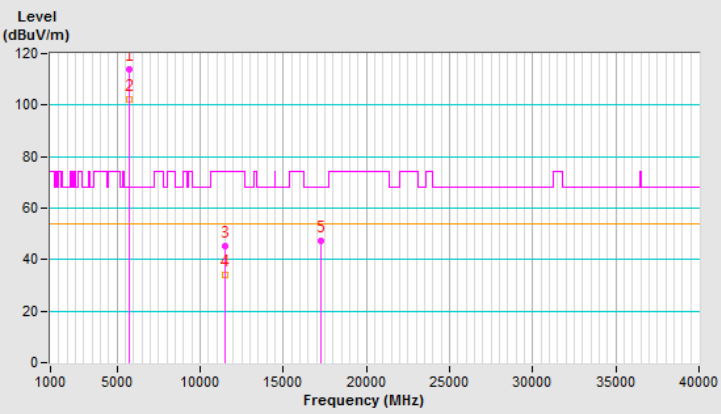


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 159：5.795 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=2kHz
量 測 場 地 溫 度 ：	23℃	量 測 場 地 濕 度 ：	67%RH
測 試 日 期 ：	109 年 1 月 22 日	測 試 者 ：	柯其宗

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5795.00	115.7 PK			1.60 H	47	112.2	3.5
2	*5795.00	103.2 AV			1.60 H	47	99.7	3.5
3	11590.00	46.8 PK	74.0	-27.2	1.78 H	55	34.5	12.3
4	11590.00	34.0 AV	54.0	-20.0	1.78 H	55	21.7	12.3
5	#17385.00	46.9 PK	68.2	-21.3	1.56 H	128	30.4	16.5
6	#23180.00	-	-	-	-	-	-	-
7	#28975.00	-	-	-	-	-	-	-
8	#34770.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

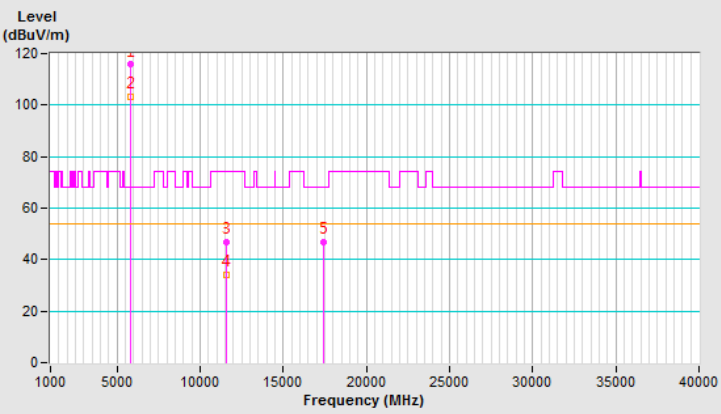


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 159：5.795 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=2kHz
量 測 場 地 溫 度 ：	23℃	量 測 場 地 濕 度 ：	67%RH
測 試 日 期 ：	109 年 1 月 22 日	測 試 者 ：	柯其宗

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5795.00	113.7 PK			3.88 V	345	110.2	3.5
2	*5795.00	101.8 AV			3.88 V	345	98.3	3.5
3	11590.00	44.7 PK	74.0	-29.3	2.37 V	153	32.4	12.3
4	11590.00	33.3 AV	54.0	-20.7	2.37 V	153	21.0	12.3
5	#17385.00	47.3 PK	68.2	-20.9	2.29 V	135	30.8	16.5
6	#23180.00	-	-	-	-	-	-	-
7	#28975.00	-	-	-	-	-	-	-
8	#34770.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

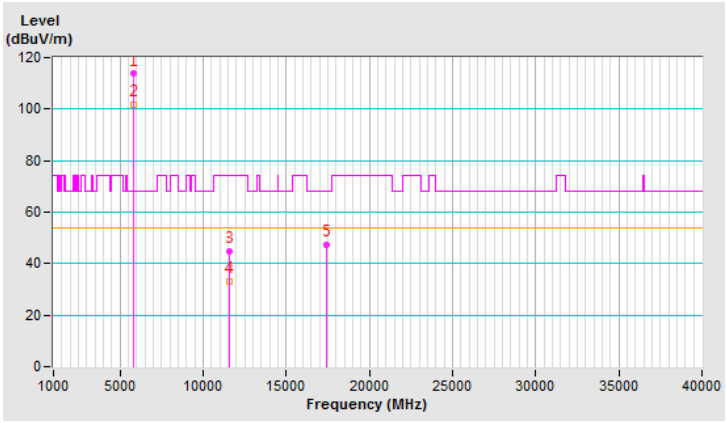


802.11ax (HE80)

操作模式 ：	發射	調變技術 ：	OFDMA
基本波頻率 ：	CH 42：5.21 GHz	測試儀器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=3kHz
量測場地溫度 ：	23℃	量測場地濕度 ：	67%RH
測試日期 ：	109 年 1 月 22 日	測試者 ：	柯其宗

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	69.4 PK	74.0	-4.6	2.41 H	64	66.4	3.0
2	5150.00	53.6 AV	54.0	-0.4	2.41 H	64	50.6	3.0
3	*5210.00	110.1 PK			2.41 H	64	107.4	2.7
4	*5210.00	96.3 AV			2.41 H	64	93.6	2.7
5	5350.00	54.2 PK	74.0	-19.8	2.41 H	64	51.6	2.6
6	5350.00	41.1 AV	54.0	-12.9	2.41 H	64	38.5	2.6
7	#10420.00	46.9 PK	68.2	-21.3	1.74 H	79	34.6	12.3
8	15630.00	47.1 PK	74.0	-26.9	1.58 H	154	34.4	12.7
9	15630.00	34.5 AV	54.0	-19.5	1.58 H	154	21.8	12.7
10	20840.00	-	-	-	-	-	-	-
11	#26050.00	-	-	-	-	-	-	-
12	31260.00	-	-	-	-	-	-	-
13	36470.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

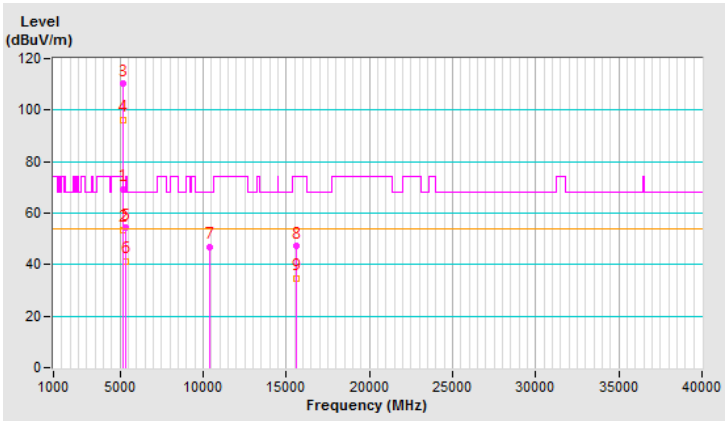


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 42：5.21 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=3kHz
量 測 場 地 溫 度 ：	23℃	量 測 場 地 濕 度 ：	67%RH
測 試 日 期 ：	109 年 1 月 22 日	測 試 者 ：	柯其宗

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	66.6 PK	74.0	-7.4	2.19 V	348	63.6	3.0
2	5150.00	50.3 AV	54.0	-3.7	2.19 V	348	47.3	3.0
3	*5210.00	106.4 PK			2.19 V	348	103.7	2.7
4	*5210.00	92.9 AV			2.19 V	348	90.2	2.7
5	5350.00	53.8 PK	74.0	-20.2	2.19 V	348	51.2	2.6
6	5350.00	40.2 AV	54.0	-13.8	2.19 V	348	37.6	2.6
7	#10420.00	45.0 PK	68.2	-23.2	2.34 V	128	32.7	12.3
8	15630.00	47.1 PK	74.0	-26.9	2.26 V	152	34.4	12.7
9	15630.00	34.6 AV	54.0	-19.4	2.26 V	152	21.9	12.7
10	20840.00	-	-	-	-	-	-	-
11	#26050.00	-	-	-	-	-	-	-
12	31260.00	-	-	-	-	-	-	-
13	36470.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

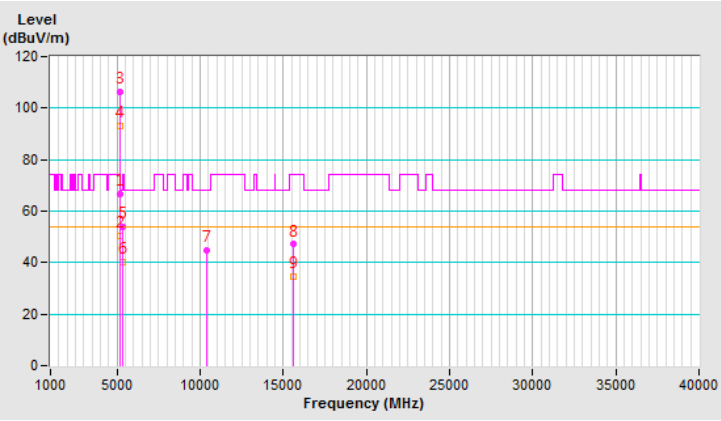


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 58：5.29 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=3kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	71%RH
測 試 日 期 ：	109 年 2 月 28 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	54.7 PK	74.0	-19.3	2.31 H	65	51.7	3.0
2	5150.00	45.2 AV	54.0	-8.8	2.31 H	65	42.2	3.0
3	*5290.00	109.2 PK			2.31 H	65	106.8	2.4
4	*5290.00	97.2 AV			2.31 H	65	94.8	2.4
5	5350.00	71.7 PK	74.0	-2.3	2.31 H	65	69.1	2.6
6	5350.00	53.9 AV	54.0	-0.1	2.31 H	65	51.3	2.6
7	#10580.00	44.0 PK	68.2	-24.2	3.54 H	205	31.5	12.5
8	15870.00	46.0 PK	74.0	-28.0	1.64 H	171	34.1	11.9
9	15870.00	34.9 AV	54.0	-19.1	1.64 H	171	23.0	11.9
10	21160.00	-	-	-	-	-	-	-
11	#26450.00	-	-	-	-	-	-	-
12	31740.00	-	-	-	-	-	-	-
13	#37030.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

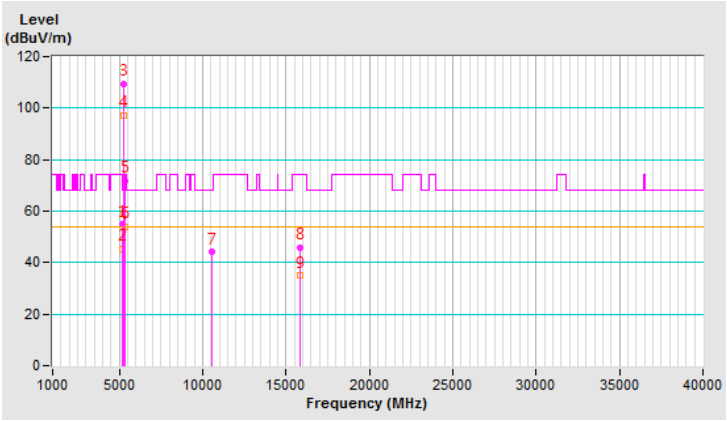


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 58：5.29 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=3kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	71%RH
測 試 日 期 ：	109 年 2 月 28 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	52.5 PK	74.0	-21.5	3.09 V	25	49.5	3.0
2	5150.00	42.2 AV	54.0	-11.8	3.09 V	25	39.2	3.0
3	*5290.00	106.5 PK			3.09 V	25	104.1	2.4
4	*5290.00	94.3 AV			3.09 V	25	91.9	2.4
5	5350.00	65.5 PK	74.0	-8.5	3.09 V	25	62.9	2.6
6	5350.00	49.6 AV	54.0	-4.4	3.09 V	25	47.0	2.6
7	#10580.00	43.8 PK	68.2	-24.4	3.12 V	189	31.3	12.5
8	15870.00	45.4 PK	74.0	-28.6	3.58 V	180	33.5	11.9
9	15870.00	34.4 AV	54.0	-19.6	3.58 V	180	22.5	11.9
10	21160.00	-	-	-	-	-	-	-
11	#26450.00	-	-	-	-	-	-	-
12	31740.00	-	-	-	-	-	-	-
13	#37030.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

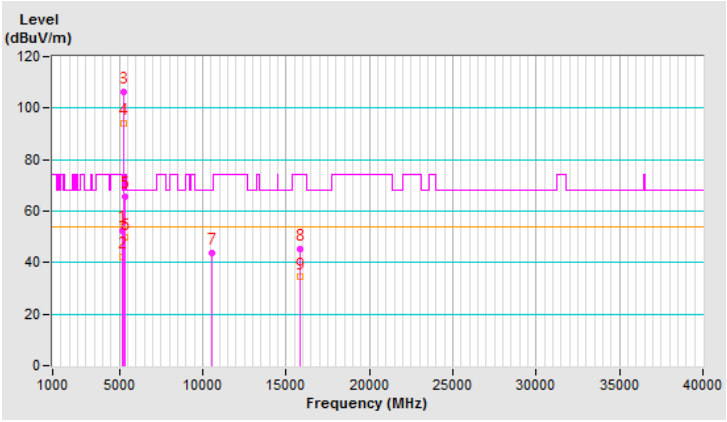


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 106：5.53 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=3kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	71%RH
測 試 日 期 ：	109 年 2 月 28 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	65.3 PK	74.0	-8.7	2.33 H	66	62.3	3.0
2	5460.00	48.8 AV	54.0	-5.2	2.33 H	66	45.8	3.0
3	#5470.00	67.9 PK	68.2	-0.3	2.33 H	66	64.8	3.1
4	*5530.00	108.6 PK			2.33 H	66	105.6	3.0
5	*5530.00	95.8 AV			2.33 H	66	92.8	3.0
6	#5725.00	51.5 PK	68.2	-16.7	2.33 H	66	48.2	3.3
7	11060.00	43.2 PK	74.0	-30.8	3.60 H	218	30.8	12.4
8	11060.00	30.2 AV	54.0	-23.8	3.60 H	218	17.8	12.4
9	#16590.00	47.1 PK	68.2	-21.1	1.55 H	176	32.7	14.4
10	22120.00	-	-	-	-	-	-	-
11	#27650.00	-	-	-	-	-	-	-
12	#33180.00	-	-	-	-	-	-	-
13	38710.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

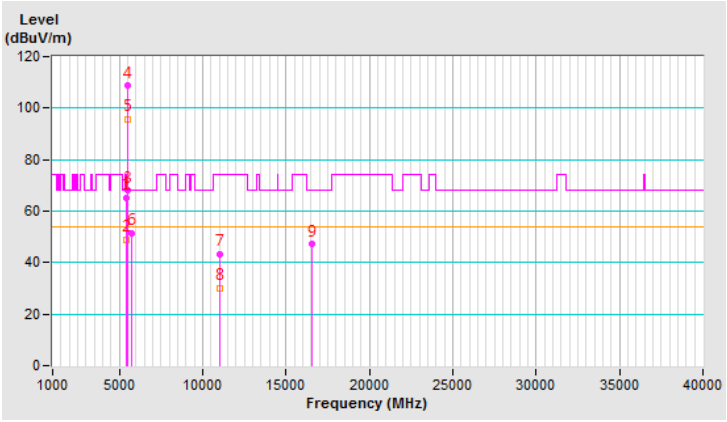


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 106：5.53 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=3kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	71%RH
測 試 日 期 ：	109 年 2 月 28 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	63.5 PK	74.0	-10.5	3.15 V	53	60.5	3.0
2	5460.00	46.7 AV	54.0	-7.3	3.15 V	53	43.7	3.0
3	#5470.00	65.4 PK	68.2	-2.8	3.15 V	53	62.3	3.1
4	*5530.00	105.8 PK			3.15 V	53	102.8	3.0
5	*5530.00	93.5 AV			3.15 V	53	90.5	3.0
6	#5725.00	52.3 PK	68.2	-15.9	3.15 V	53	49.0	3.3
7	11060.00	44.0 PK	74.0	-30.0	3.06 V	212	31.6	12.4
8	11060.00	31.0 AV	54.0	-23.0	3.06 V	212	18.6	12.4
9	#16590.00	45.7 PK	68.2	-22.5	3.55 V	166	31.3	14.4
10	22120.00	-	-	-	-	-	-	-
11	#27650.00	-	-	-	-	-	-	-
12	#33180.00	-	-	-	-	-	-	-
13	38710.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

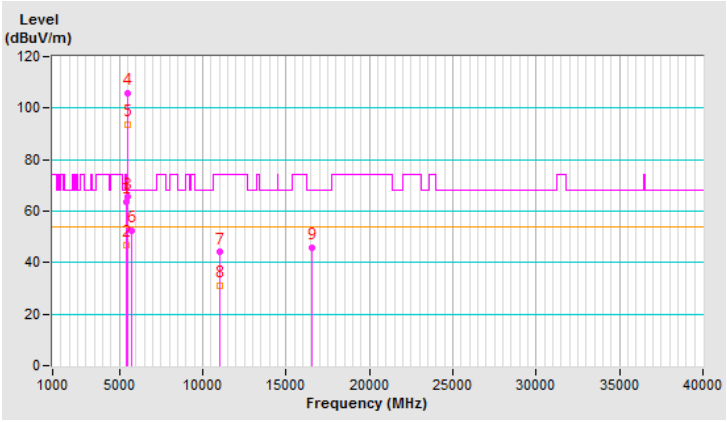


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 122：5.61 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=3kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	71%RH
測 試 日 期 ：	109 年 2 月 28 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5610.00	111.6 PK			2.27 H	60	108.6	3.0
2	*5610.00	99.5 AV			2.27 H	60	96.5	3.0
3	#5725.00	68.1 PK	68.2	-0.1	2.27 H	60	64.8	3.3
4	11220.00	43.3 PK	74.0	-30.7	3.52 H	194	30.8	12.5
5	11220.00	30.2 AV	54.0	-23.8	3.52 H	194	17.7	12.5
6	#16830.00	46.7 PK	68.2	-21.5	1.59 H	190	31.8	14.9
7	22440.00	-	-	-	-	-	-	-
8	#28050.00	-	-	-	-	-	-	-
9	#33660.00	-	-	-	-	-	-	-
10	39270.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

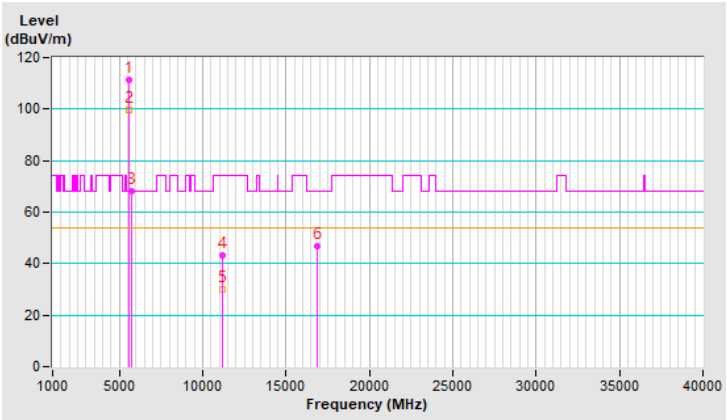


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 122：5.61 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=3kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	71%RH
測 試 日 期 ：	109 年 2 月 28 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5610.00	108.8 PK			3.16 V	52	105.8	3.0
2	*5610.00	96.4 AV			3.16 V	52	93.4	3.0
3	#5725.00	66.1 PK	68.2	-2.1	3.16 V	52	62.8	3.3
4	11220.00	44.0 PK	74.0	-30.0	3.17 V	209	31.5	12.5
5	11220.00	30.6 AV	54.0	-23.4	3.17 V	209	18.1	12.5
6	#16830.00	45.1 PK	68.2	-23.1	3.51 V	162	30.2	14.9
7	22440.00	-	-	-	-	-	-	-
8	#28050.00	-	-	-	-	-	-	-
9	#33660.00	-	-	-	-	-	-	-
10	39270.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

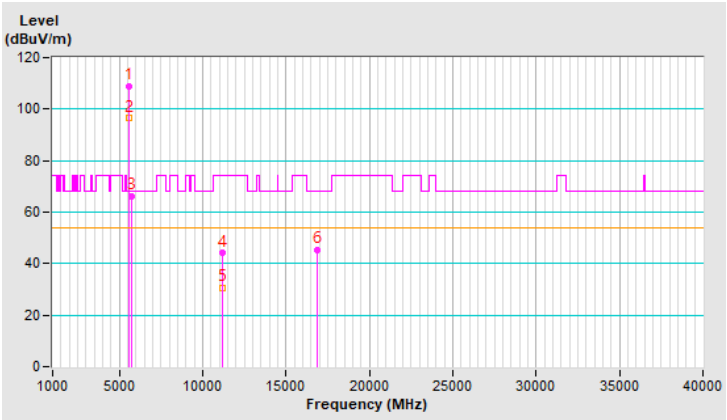


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 138：5.69 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=3kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	71%RH
測 試 日 期 ：	109 年 2 月 28 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	55.3 PK	74.0	-18.7	2.34 H	39	52.3	3.0
2	5460.00	41.5 AV	54.0	-12.5	2.34 H	39	38.5	3.0
3	#5470.00	55.8 PK	68.2	-12.4	2.34 H	39	52.7	3.1
4	*5690.00	114.5 PK			2.34 H	39	111.3	3.2
5	*5690.00	102.2 AV			2.34 H	39	99.0	3.2
6	#5850.00	63.3 PK	68.2	-4.9	2.34 H	39	59.6	3.7
7	11380.00	43.7 PK	74.0	-30.3	3.55 H	200	30.8	12.9
8	11380.00	30.4 AV	54.0	-23.6	3.55 H	200	17.5	12.9
9	#17070.00	47.2 PK	68.2	-21.0	1.59 H	168	31.1	16.1
10	22760.00	-	-	-	-	-	-	-
11	#28450.00	-	-	-	-	-	-	-
12	#34140.00	-	-	-	-	-	-	-
13	39830.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

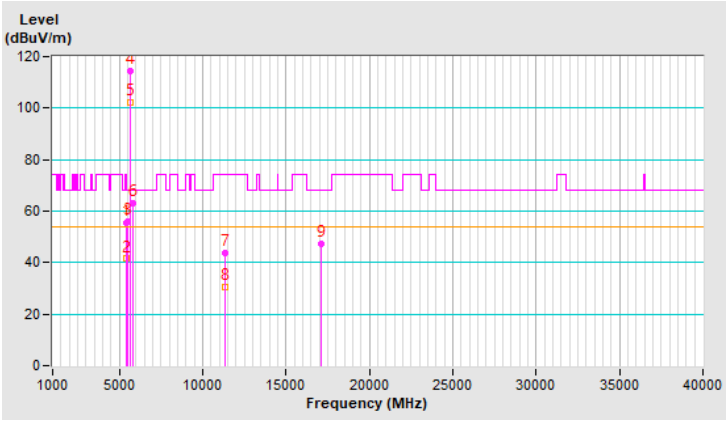


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 138：5.69 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=3kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	71%RH
測 試 日 期 ：	109 年 2 月 28 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	55.0 PK	74.0	-19.0	3.10 V	35	52.0	3.0
2	5460.00	41.0 AV	54.0	-13.0	3.10 V	35	38.0	3.0
3	#5470.00	55.5 PK	68.2	-12.7	3.10 V	35	52.4	3.1
4	*5690.00	111.7 PK			3.10 V	35	108.5	3.2
5	*5690.00	99.1 AV			3.10 V	35	95.9	3.2
6	#5850.00	61.8 PK	68.2	-6.4	3.10 V	35	58.1	3.7
7	11380.00	43.9 PK	74.0	-30.1	3.15 V	212	31.0	12.9
8	11380.00	31.0 AV	54.0	-23.0	3.15 V	212	18.1	12.9
9	#17070.00	45.3 PK	68.2	-22.9	3.56 V	152	29.2	16.1
10	22760.00	-	-	-	-	-	-	-
11	#28450.00	-	-	-	-	-	-	-
12	#34140.00	-	-	-	-	-	-	-
13	39830.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

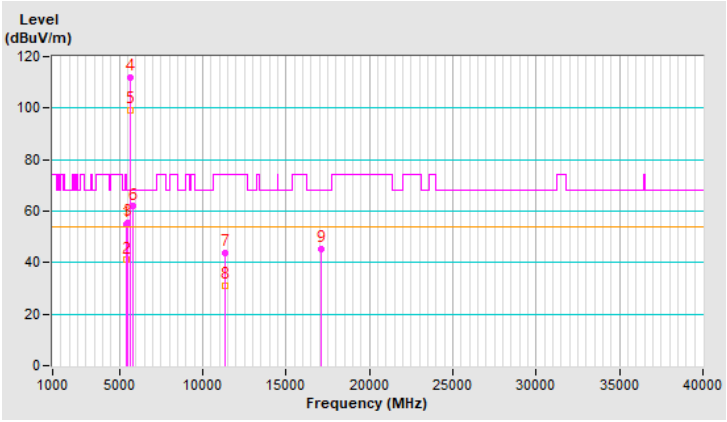


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 155：5.775 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=3kHz
量 測 場 地 溫 度 ：	23℃	量 測 場 地 濕 度 ：	67%RH
測 試 日 期 ：	109 年 1 月 22 日	測 試 者 ：	柯其宗

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5775.00	112.3 PK			1.72 H	48	108.9	3.4
2	*5775.00	99.4 AV			1.72 H	48	96.0	3.4
3	11550.00	47.4 PK	74.0	-26.6	1.73 H	64	35.0	12.4
4	11550.00	34.5 AV	54.0	-19.5	1.73 H	64	22.1	12.4
5	#17325.00	46.6 PK	68.2	-21.6	1.54 H	136	29.9	16.7
6	23100.00	-	-	-	-	-	-	-
7	#28875.00	-	-	-	-	-	-	-
8	#34650.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

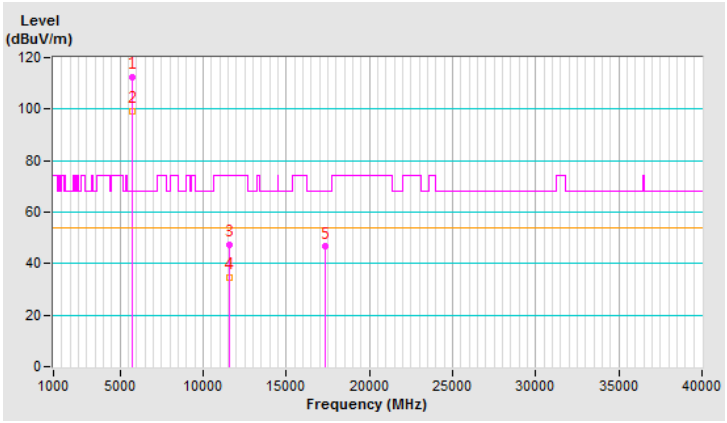


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 155：5.775 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=3kHz
量 測 場 地 溫 度 ：	23℃	量 測 場 地 濕 度 ：	67%RH
測 試 日 期 ：	109 年 1 月 22 日	測 試 者 ：	柯其宗

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5775.00	110.1 PK			3.87 V	352	106.7	3.4
2	*5775.00	97.9 AV			3.87 V	352	94.5	3.4
3	11550.00	44.9 PK	74.0	-29.1	2.37 V	145	32.5	12.4
4	11550.00	33.4 AV	54.0	-20.6	2.37 V	145	21.0	12.4
5	#17325.00	48.3 PK	68.2	-19.9	2.29 V	126	31.6	16.7
6	23100.00	-	-	-	-	-	-	-
7	#28875.00	-	-	-	-	-	-	-
8	#34650.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

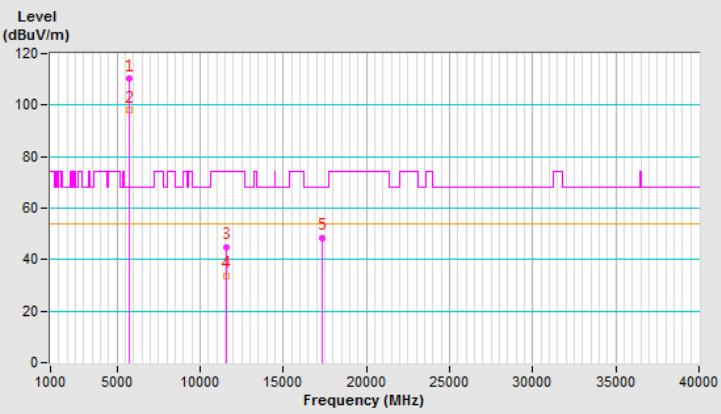

4.10 量測結果 (模式 5)

4.10.1 發射諧波


802.11a

操作模式 :	發射	調變技術 :	OFDM
基本波頻率 :	CH 36：5.18 GHz	測試儀器 :	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=10Hz
量測場地溫度 :	23℃	量測場地濕度 :	67%RH
測試日期 :	109 年 1 月 22 日	測試者 :	柯其宗

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	70.7 PK	74.0	-3.3	2.17 H	59	67.7	3.0
2	5150.00	53.0 AV	54.0	-1.0	2.17 H	59	50.0	3.0
3	*5180.00	114.5 PK			2.17 H	59	111.6	2.9
4	*5180.00	103.0 AV			2.17 H	59	100.1	2.9
5	#10360.00	46.1 PK	68.2	-22.1	1.39 H	38	34.1	12.0
6	15540.00	45.6 PK	74.0	-28.4	2.26 H	158	32.6	13.0
7	15540.00	33.7 AV	54.0	-20.3	2.26 H	158	20.7	13.0
8	20720.00	-	-	-	-	-	-	-
9	#25900.00	-	-	-	-	-	-	-
10	#31080.00	-	-	-	-	-	-	-
11	#36260.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

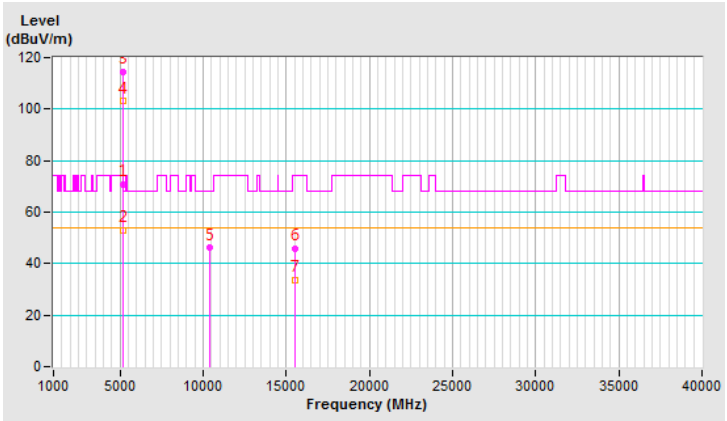


操 作 模 式 ：	發射	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 36：5.18 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=10Hz
量 測 場 地 溫 度 ：	23℃	量 測 場 地 濕 度 ：	67%RH
測 試 日 期 ：	109 年 1 月 22 日	測 試 者 ：	柯其宗

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	67.2 PK	74.0	-6.8	3.73 V	10	64.2	3.0
2	5150.00	49.9 AV	54.0	-4.1	3.73 V	10	46.9	3.0
3	*5180.00	111.8 PK			3.73 V	10	108.9	2.9
4	*5180.00	100.0 AV			3.73 V	10	97.1	2.9
5	#10360.00	45.7 PK	68.2	-22.5	2.65 V	147	33.7	12.0
6	15540.00	45.4 PK	74.0	-28.6	1.90 V	177	32.4	13.0
7	15540.00	33.6 AV	54.0	-20.4	1.90 V	177	20.6	13.0
8	20720.00	-	-	-	-	-	-	-
9	#25900.00	-	-	-	-	-	-	-
10	#31080.00	-	-	-	-	-	-	-
11	#36260.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

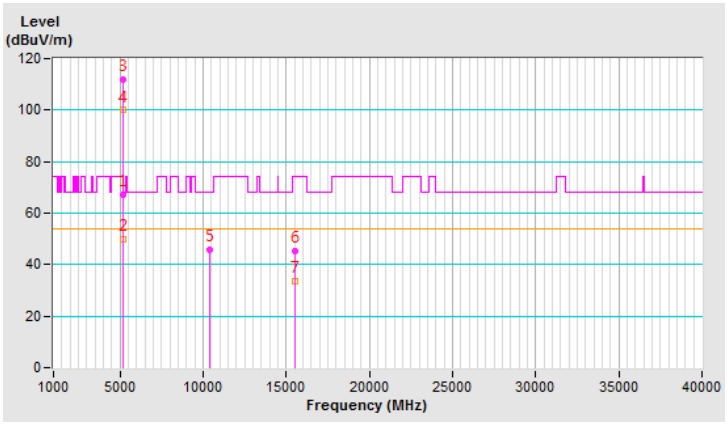


操 作 模 式 ：	發射	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 40：5.2 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=10Hz
量 測 場 地 溫 度 ：	23℃	量 測 場 地 濕 度 ：	67%RH
測 試 日 期 ：	109 年 1 月 22 日	測 試 者 ：	柯其宗

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5200.00	113.9 PK			2.15 H	70	111.1	2.8
2	*5200.00	102.6 AV			2.15 H	70	99.8	2.8
3	#10400.00	46.3 PK	68.2	-21.9	1.40 H	51	34.2	12.1
4	15600.00	45.4 PK	74.0	-28.6	2.21 H	172	32.5	12.9
5	15600.00	33.5 AV	54.0	-20.5	2.21 H	172	20.6	12.9
6	20800.00	-	-	-	-	-	-	-
7	#26000.00	-	-	-	-	-	-	-
8	31200.00	-	-	-	-	-	-	-
9	#36400.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

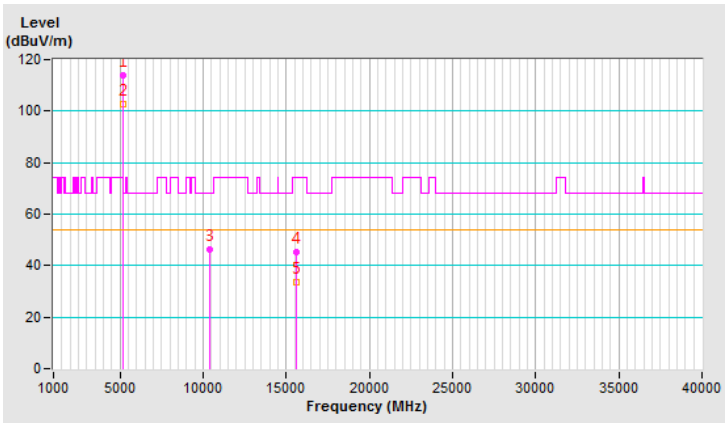


操 作 模 式 ：	發射	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 40：5.2 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=10Hz
量 測 場 地 溫 度 ：	23℃	量 測 場 地 濕 度 ：	67%RH
測 試 日 期 ：	109 年 1 月 22 日	測 試 者 ：	柯其宗

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5200.00	111.8 PK			3.71 V	22	109.0	2.8
2	*5200.00	100.1 AV			3.71 V	22	97.3	2.8
3	#10400.00	46.0 PK	68.2	-22.2	2.60 V	141	33.9	12.1
4	15600.00	45.7 PK	74.0	-28.3	1.89 V	164	32.8	12.9
5	15600.00	33.8 AV	54.0	-20.2	1.89 V	164	20.9	12.9
6	20800.00	-	-	-	-	-	-	-
7	#26000.00	-	-	-	-	-	-	-
8	31200.00	-	-	-	-	-	-	-
9	#36400.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

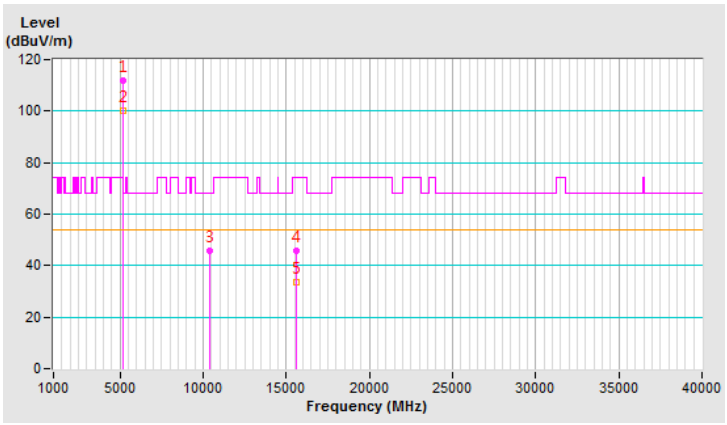


操 作 模 式 ：	發射	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 48：5.24 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=10Hz
量 測 場 地 溫 度 ：	23℃	量 測 場 地 濕 度 ：	67%RH
測 試 日 期 ：	109 年 1 月 22 日	測 試 者 ：	柯其宗

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5240.00	114.7 PK			2.13 H	43	112.1	2.6
2	*5240.00	103.5 AV			2.13 H	43	100.9	2.6
3	5350.00	53.6 PK	74.0	-20.4	2.13 H	43	51.0	2.6
4	5350.00	41.2 AV	54.0	-12.8	2.13 H	43	38.6	2.6
5	#10480.00	45.3 PK	68.2	-22.9	1.37 H	48	32.8	12.5
6	15720.00	45.8 PK	74.0	-28.2	2.27 H	150	33.6	12.2
7	15720.00	33.8 AV	54.0	-20.2	2.27 H	150	21.6	12.2
8	20960.00	-	-	-	-	-	-	-
9	#26200.00	-	-	-	-	-	-	-
10	31440.00	-	-	-	-	-	-	-
11	#36680.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

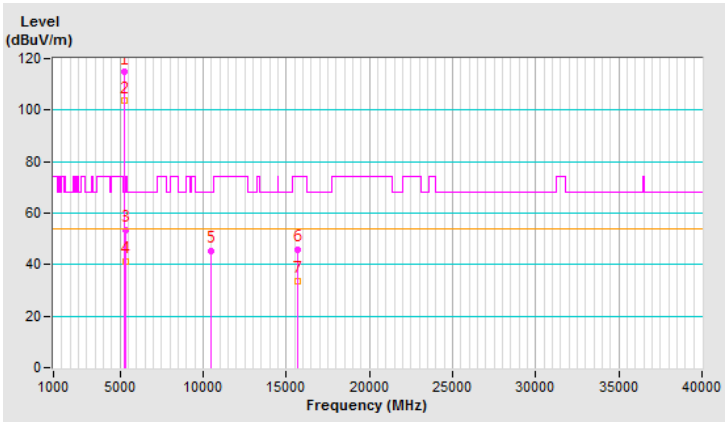


操 作 模 式 ：	發射	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 48：5.24 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=10Hz
量 測 場 地 溫 度 ：	23℃	量 測 場 地 濕 度 ：	67%RH
測 試 日 期 ：	109 年 1 月 22 日	測 試 者 ：	柯其宗

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5240.00	111.8 PK			3.77 V	14	109.2	2.6
2	*5240.00	100.1 AV			3.77 V	14	97.5	2.6
3	5350.00	52.5 PK	74.0	-21.5	3.77 V	14	49.9	2.6
4	5350.00	40.0 AV	54.0	-14.0	3.77 V	14	37.4	2.6
5	#10480.00	45.9 PK	68.2	-22.3	2.64 V	150	33.4	12.5
6	15720.00	45.8 PK	74.0	-28.2	1.88 V	176	33.6	12.2
7	15720.00	33.9 AV	54.0	-20.1	1.88 V	176	21.7	12.2
8	20960.00	-	-	-	-	-	-	-
9	#26200.00	-	-	-	-	-	-	-
10	31440.00	-	-	-	-	-	-	-
11	#36680.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

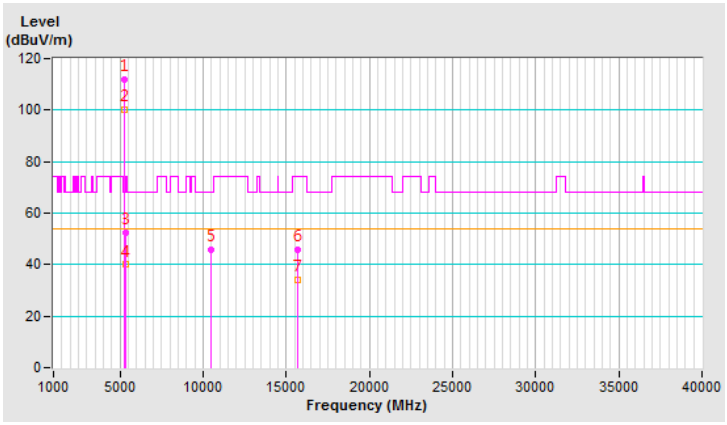


操 作 模 式 ：	發射	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 52：5.26 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=10Hz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	71%RH
測 試 日 期 ：	109 年 2 月 28 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	50.2 PK	74.0	-23.8	2.87 H	55	47.2	3.0
2	5150.00	41.6 AV	54.0	-12.4	2.87 H	55	38.6	3.0
3	*5260.00	111.6 PK			2.87 H	55	109.1	2.5
4	*5260.00	100.6 AV			2.87 H	55	98.1	2.5
5	#10520.00	43.1 PK	68.2	-25.1	3.59 H	200	30.5	12.6
6	15780.00	46.0 PK	74.0	-28.0	1.57 H	166	34.2	11.8
7	15780.00	34.9 AV	54.0	-19.1	1.57 H	166	23.1	11.8
8	21040.00	-	-	-	-	-	-	-
9	#26300.00	-	-	-	-	-	-	-
10	31560.00	-	-	-	-	-	-	-
11	#36820.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

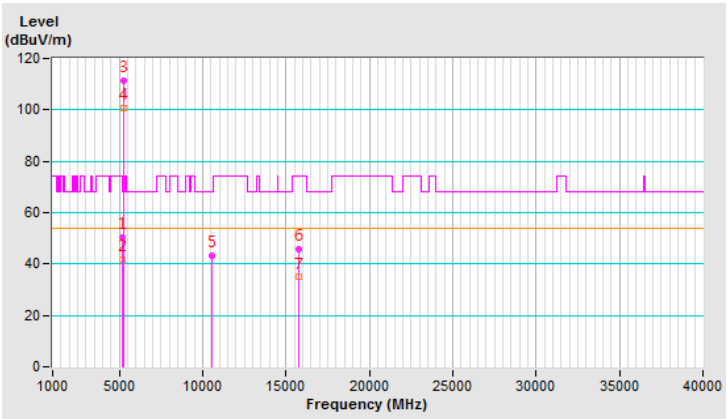


操 作 模 式 ：	發射	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 52：5.26 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=10Hz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	71%RH
測 試 日 期 ：	109 年 2 月 28 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	49.8 PK	74.0	-24.2	3.16 V	24	46.8	3.0
2	5150.00	39.0 AV	54.0	-15.0	3.16 V	24	36.0	3.0
3	*5260.00	108.8 PK			3.16 V	24	106.3	2.5
4	*5260.00	97.5 AV			3.16 V	24	95.0	2.5
5	#10520.00	44.1 PK	68.2	-24.1	3.12 V	198	31.5	12.6
6	15780.00	45.3 PK	74.0	-28.7	3.56 V	164	33.5	11.8
7	15780.00	34.4 AV	54.0	-19.6	3.56 V	164	22.6	11.8
8	21040.00	-	-	-	-	-	-	-
9	#26300.00	-	-	-	-	-	-	-
10	31560.00	-	-	-	-	-	-	-
11	#36820.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

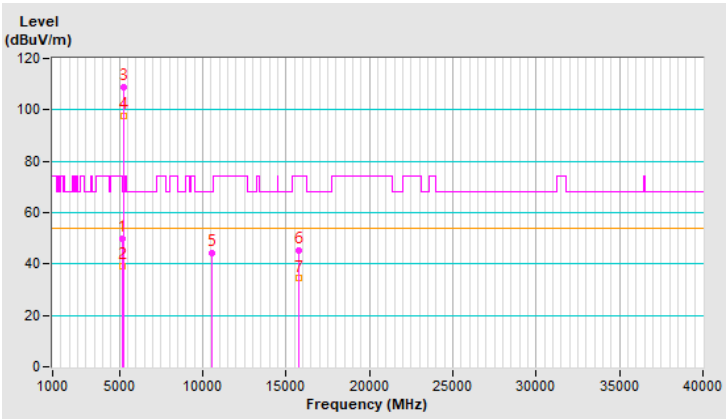


操 作 模 式 ：	發射	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 60：5.3 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=10Hz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	71%RH
測 試 日 期 ：	109 年 2 月 28 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5300.00	110.1 PK			2.47 H	59	107.7	2.4
2	*5300.00	100.2 AV			2.47 H	59	97.8	2.4
3	5350.00	60.9 PK	74.0	-13.1	2.47 H	59	58.3	2.6
4	5350.00	43.6 AV	54.0	-10.4	2.47 H	59	41.0	2.6
5	10600.00	42.3 PK	74.0	-31.7	3.50 H	199	29.9	12.4
6	10600.00	29.5 AV	54.0	-24.5	3.50 H	199	17.1	12.4
7	15900.00	45.8 PK	74.0	-28.2	1.54 H	170	33.7	12.1
8	15900.00	34.9 AV	54.0	-19.1	1.54 H	170	22.8	12.1
9	21200.00	-	-	-	-	-	-	-
10	#26500.00	-	-	-	-	-	-	-
11	31800.00	-	-	-	-	-	-	-
12	#37100.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

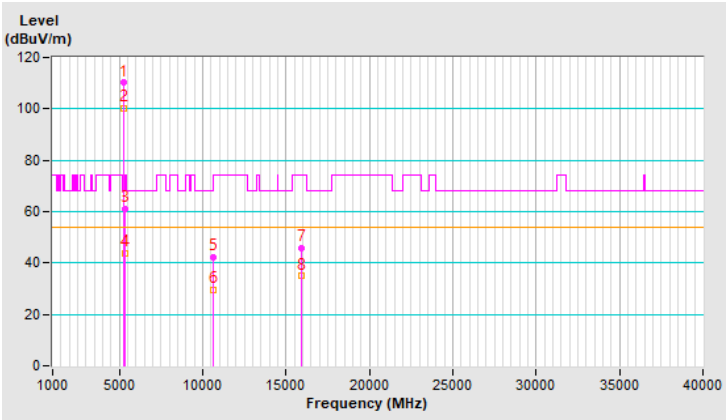


操 作 模 式 ：	發射	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 60：5.3 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=10Hz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	71%RH
測 試 日 期 ：	109 年 2 月 28 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5300.00	108.4 PK			3.18 V	36	106.0	2.4
2	*5300.00	97.3 AV			3.18 V	36	94.9	2.4
3	5350.00	54.8 PK	74.0	-19.2	3.18 V	36	52.2	2.6
4	5350.00	40.3 AV	54.0	-13.7	3.18 V	36	37.7	2.6
5	10600.00	44.1 PK	74.0	-29.9	3.13 V	203	31.7	12.4
6	10600.00	31.1 AV	54.0	-22.9	3.13 V	203	18.7	12.4
7	15900.00	45.8 PK	74.0	-28.2	3.49 V	137	33.7	12.1
8	15900.00	33.8 AV	54.0	-20.2	3.49 V	137	21.7	12.1
9	21200.00	-	-	-	-	-	-	-
10	#26500.00	-	-	-	-	-	-	-
11	31800.00	-	-	-	-	-	-	-
12	#37100.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

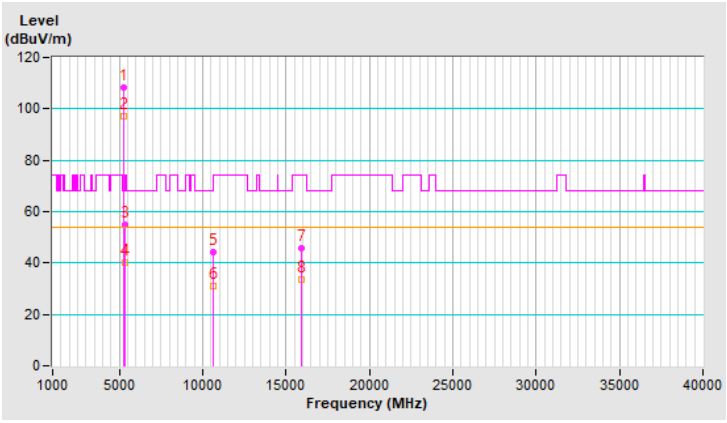


操 作 模 式 ：	發射	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 64：5.32 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=10Hz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	71%RH
測 試 日 期 ：	109 年 2 月 28 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5320.00	110.5 PK			2.52 H	59	108.0	2.5
2	*5320.00	100.3 AV			2.52 H	59	97.8	2.5
3	5350.00	69.8 PK	74.0	-4.2	2.52 H	59	67.2	2.6
4	5350.00	53.9 AV	54.0	-0.1	2.52 H	59	51.3	2.6
5	10640.00	42.6 PK	74.0	-31.4	3.55 H	200	30.2	12.4
6	10640.00	29.6 AV	54.0	-24.4	3.55 H	200	17.2	12.4
7	15960.00	45.4 PK	74.0	-28.6	1.49 H	195	33.0	12.4
8	15960.00	34.3 AV	54.0	-19.7	1.49 H	195	21.9	12.4
9	21280.00	-	-	-	-	-	-	-
10	#26600.00	-	-	-	-	-	-	-
11	#31920.00	-	-	-	-	-	-	-
12	#37240.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

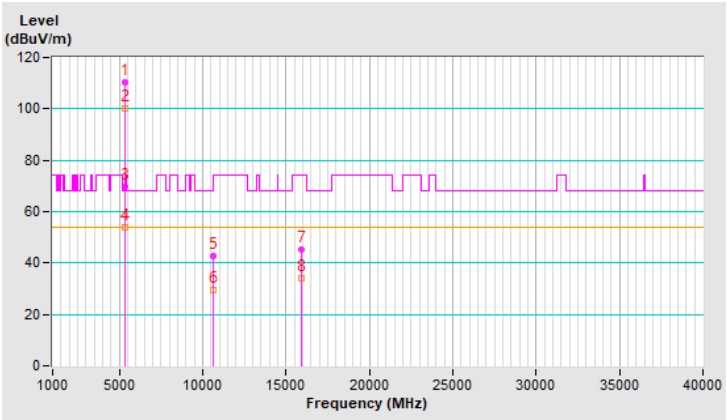


操 作 模 式 ：	發射	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 64：5.32 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=10Hz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	71%RH
測 試 日 期 ：	109 年 2 月 28 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5320.00	108.3 PK			3.14 V	11	105.8	2.5
2	*5320.00	97.2 AV			3.14 V	11	94.7	2.5
3	5350.00	65.4 PK	74.0	-8.6	3.14 V	11	62.8	2.6
4	5350.00	49.6 AV	54.0	-4.4	3.14 V	11	47.0	2.6
5	10640.00	43.8 PK	74.0	-30.2	3.07 V	179	31.4	12.4
6	10640.00	30.6 AV	54.0	-23.4	3.07 V	179	18.2	12.4
7	15960.00	45.9 PK	74.0	-28.1	3.54 V	167	33.5	12.4
8	15960.00	34.4 AV	54.0	-19.6	3.54 V	167	22.0	12.4
9	21280.00	-	-	-	-	-	-	-
10	#26600.00	-	-	-	-	-	-	-
11	#31920.00	-	-	-	-	-	-	-
12	#37240.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

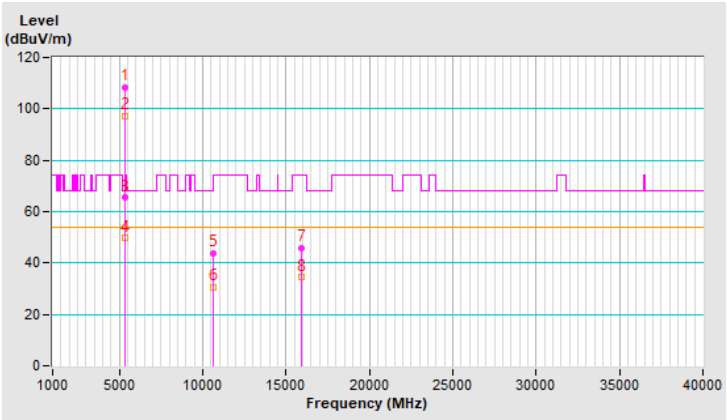


操 作 模 式 ：	發射	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 100：5.5 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=10Hz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	71%RH
測 試 日 期 ：	109 年 2 月 28 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	64.4 PK	74.0	-9.6	1.98 H	50	61.4	3.0
2	5460.00	41.7 AV	54.0	-12.3	1.98 H	50	38.7	3.0
3	#5470.00	67.9 PK	68.2	-0.3	1.98 H	50	64.8	3.1
4	*5500.00	109.7 PK			1.98 H	50	106.6	3.1
5	*5500.00	99.6 AV			1.98 H	50	96.5	3.1
6	11000.00	41.9 PK	74.0	-32.1	3.51 H	200	29.3	12.6
7	11000.00	29.2 AV	54.0	-24.8	3.51 H	200	16.6	12.6
8	#16500.00	45.9 PK	68.2	-22.3	1.60 H	171	32.3	13.6
9	#22000.00	-	-	-	-	-	-	-
10	#27500.00	-	-	-	-	-	-	-
11	#33000.00	-	-	-	-	-	-	-
12	#38500.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

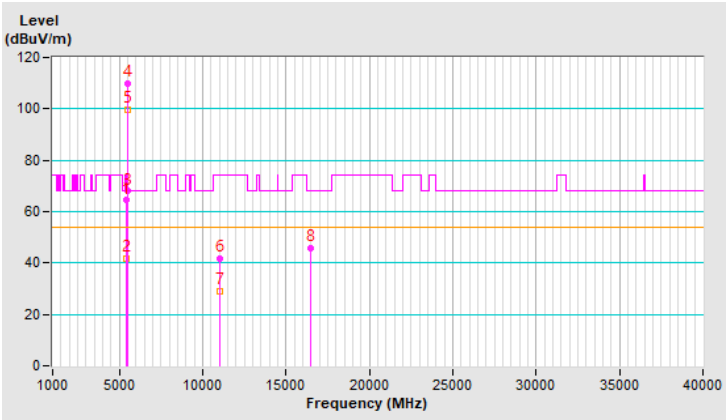


操 作 模 式 ：	發射	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 100：5.5 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=10Hz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	71%RH
測 試 日 期 ：	109 年 2 月 28 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	63.9 PK	74.0	-10.1	3.15 V	47	60.9	3.0
2	5460.00	41.2 AV	54.0	-12.8	3.15 V	47	38.2	3.0
3	#5470.00	65.4 PK	68.2	-2.8	3.15 V	47	62.3	3.1
4	*5500.00	107.4 PK			3.15 V	47	104.3	3.1
5	*5500.00	96.1 AV			3.15 V	47	93.0	3.1
6	11000.00	43.3 PK	74.0	-30.7	3.10 V	196	30.7	12.6
7	11000.00	30.3 AV	54.0	-23.7	3.10 V	196	17.7	12.6
8	#16500.00	45.7 PK	68.2	-22.5	3.49 V	140	32.1	13.6
9	#22000.00	-	-	-	-	-	-	-
10	#27500.00	-	-	-	-	-	-	-
11	#33000.00	-	-	-	-	-	-	-
12	#38500.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

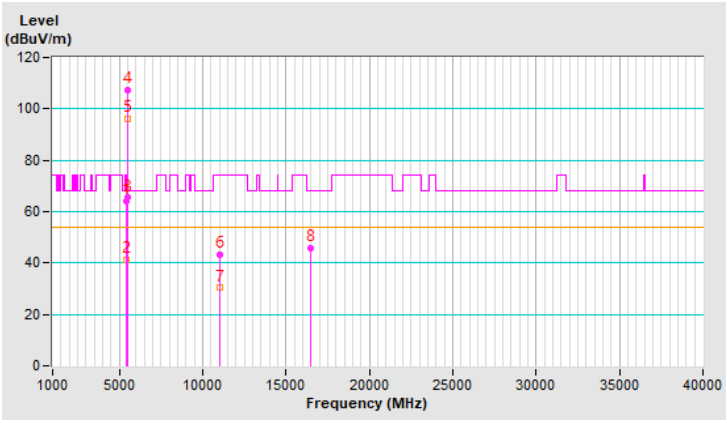


操 作 模 式 ：	發射	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 116：5.58 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=10Hz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	71%RH
測 試 日 期 ：	109 年 2 月 28 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	50.7 PK	74.0	-23.3	2.28 H	51	47.7	3.0
2	5460.00	38.5 AV	54.0	-15.5	2.28 H	51	35.5	3.0
3	#5470.00	51.2 PK	68.2	-17.0	2.28 H	51	48.1	3.1
4	*5580.00	110.9 PK			2.28 H	51	107.9	3.0
5	*5580.00	100.6 AV			2.28 H	51	97.6	3.0
6	11160.00	42.7 PK	74.0	-31.3	3.60 H	200	30.3	12.4
7	11160.00	29.7 AV	54.0	-24.3	3.60 H	200	17.3	12.4
8	#16740.00	46.0 PK	68.2	-22.2	1.57 H	181	31.2	14.8
9	22320.00	-	-	-	-	-	-	-
10	#27900.00	-	-	-	-	-	-	-
11	#33480.00	-	-	-	-	-	-	-
12	39060.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

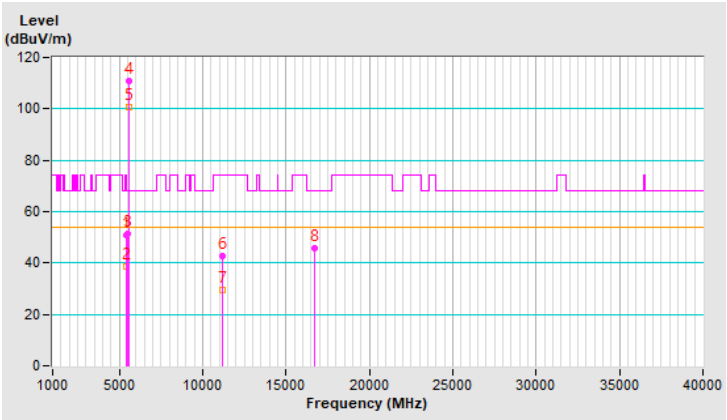


操 作 模 式 ：	發射	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 116：5.58 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=10Hz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	71%RH
測 試 日 期 ：	109 年 2 月 28 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	49.9 PK	74.0	-24.1	3.19 V	44	46.9	3.0
2	5460.00	37.6 AV	54.0	-16.4	3.19 V	44	34.6	3.0
3	#5470.00	50.9 PK	68.2	-17.3	3.19 V	44	47.8	3.1
4	*5580.00	108.5 PK			3.19 V	44	105.5	3.0
5	*5580.00	97.5 AV			3.19 V	44	94.5	3.0
6	11160.00	43.2 PK	74.0	-30.8	3.13 V	204	30.8	12.4
7	11160.00	30.3 AV	54.0	-23.7	3.13 V	204	17.9	12.4
8	#16740.00	45.5 PK	68.2	-22.7	3.46 V	161	30.7	14.8
9	22320.00	-	-	-	-	-	-	-
10	#27900.00	-	-	-	-	-	-	-
11	#33480.00	-	-	-	-	-	-	-
12	39060.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

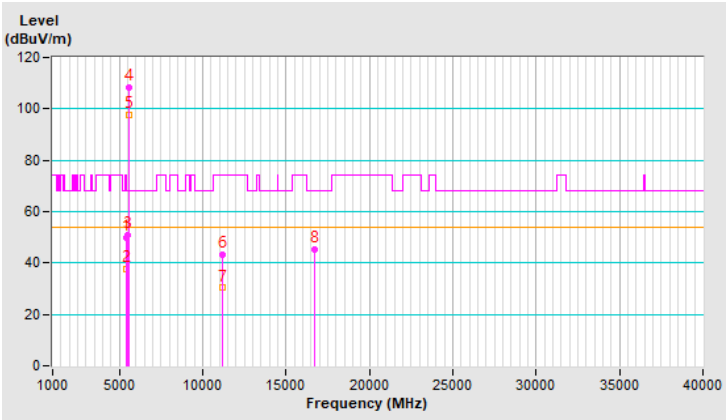


操 作 模 式 ：	發射	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 140：5.7 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=10Hz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	71%RH
測 試 日 期 ：	109 年 2 月 28 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5700.00	109.1 PK			2.01 H	52	105.9	3.2
2	*5700.00	98.6 AV			2.01 H	52	95.4	3.2
3	#5725.00	67.9 PK	68.2	-0.3	2.01 H	52	64.6	3.3
4	11400.00	43.2 PK	74.0	-30.8	3.57 H	198	30.2	13.0
5	11400.00	29.9 AV	54.0	-24.1	3.57 H	198	16.9	13.0
6	#17100.00	46.6 PK	68.2	-21.6	1.55 H	172	30.3	16.3
7	22800.00	-	-	-	-	-	-	-
8	#28500.00	-	-	-	-	-	-	-
9	#34200.00	-	-	-	-	-	-	-
10	39900.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

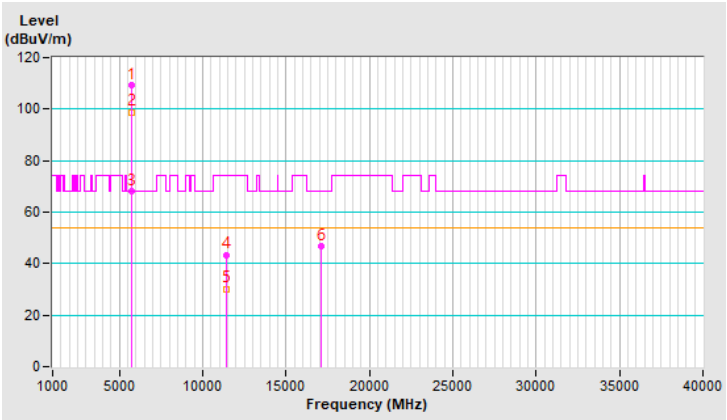


操 作 模 式 ：	發射	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 140：5.7 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=10Hz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	71%RH
測 試 日 期 ：	109 年 2 月 28 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5700.00	106.3 PK			3.15 V	40	103.1	3.2
2	*5700.00	95.6 AV			3.15 V	40	92.4	3.2
3	#5725.00	64.5 PK	68.2	-3.7	3.15 V	40	61.2	3.3
4	11400.00	44.2 PK	74.0	-29.8	3.16 V	206	31.2	13.0
5	11400.00	30.8 AV	54.0	-23.2	3.16 V	206	17.8	13.0
6	#17100.00	45.6 PK	68.2	-22.6	3.52 V	155	29.3	16.3
7	22800.00	-	-	-	-	-	-	-
8	#28500.00	-	-	-	-	-	-	-
9	#34200.00	-	-	-	-	-	-	-
10	39900.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

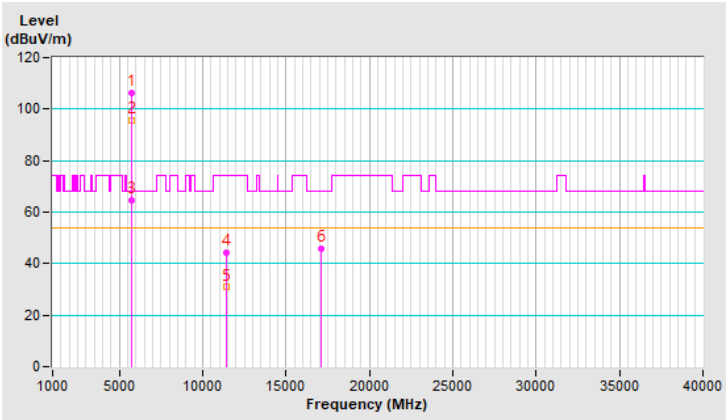


操 作 模 式 ：	發射	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 144：5.72 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=10Hz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	71%RH
測 試 日 期 ：	109 年 2 月 28 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	49.4 PK	74.0	-24.6	1.93 H	47	46.4	3.0
2	5460.00	37.0 AV	54.0	-17.0	1.93 H	47	34.0	3.0
3	#5470.00	49.7 PK	68.2	-18.5	1.93 H	47	46.6	3.1
4	*5720.00	111.3 PK			1.93 H	47	108.1	3.2
5	*5720.00	101.1 AV			1.93 H	47	97.9	3.2
6	#5850.00	51.8 PK	68.2	-16.4	1.93 H	47	48.1	3.7
7	11440.00	43.2 PK	74.0	-30.8	3.59 H	189	30.4	12.8
8	11440.00	30.1 AV	54.0	-23.9	3.59 H	189	17.3	12.8
9	#17160.00	46.4 PK	68.2	-21.8	1.53 H	186	29.8	16.6
10	22880.00	-	-	-	-	-	-	-
11	#28600.00	-	-	-	-	-	-	-
12	#34320.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

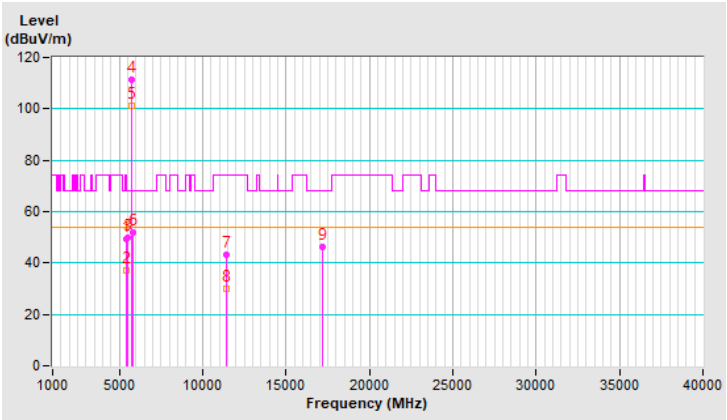


操 作 模 式 ：	發射	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 144：5.72 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=10Hz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	71%RH
測 試 日 期 ：	109 年 2 月 28 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	49.2 PK	74.0	-24.8	3.15 V	37	46.2	3.0
2	5460.00	36.8 AV	54.0	-17.2	3.15 V	37	33.8	3.0
3	#5470.00	49.5 PK	68.2	-18.7	3.15 V	37	46.4	3.1
4	*5720.00	108.8 PK			3.15 V	37	105.6	3.2
5	*5720.00	97.7 AV			3.15 V	37	94.5	3.2
6	#5850.00	51.4 PK	68.2	-16.8	3.15 V	37	47.7	3.7
7	11440.00	43.8 PK	74.0	-30.2	3.18 V	200	31.0	12.8
8	11440.00	30.7 AV	54.0	-23.3	3.18 V	200	17.9	12.8
9	#17160.00	45.5 PK	68.2	-22.7	3.48 V	141	28.9	16.6
10	22880.00	-	-	-	-	-	-	-
11	#28600.00	-	-	-	-	-	-	-
12	#34320.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

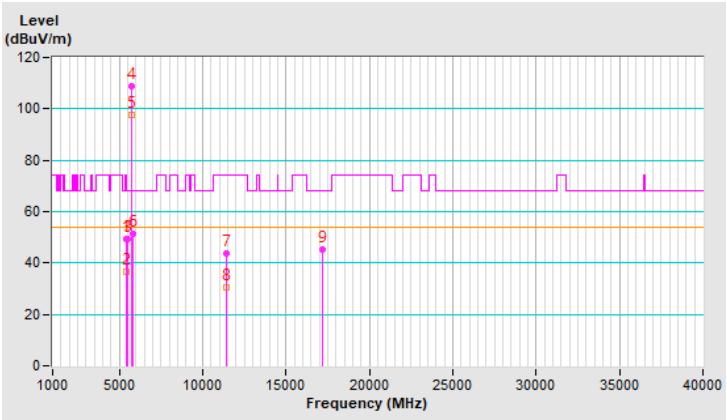


操 作 模 式 ：	發射	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 149：5.745 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=10Hz
量 測 場 地 溫 度 ：	23℃	量 測 場 地 濕 度 ：	67%RH
測 試 日 期 ：	109 年 1 月 22 日	測 試 者 ：	柯其宗

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5745.00	114.6 PK			2.06 H	64	111.3	3.3
2	*5745.00	104.5 AV			2.06 H	64	101.2	3.3
3	11490.00	45.6 PK	74.0	-28.4	1.42 H	45	33.0	12.6
4	11490.00	33.6 AV	54.0	-20.4	1.42 H	45	21.0	12.6
5	#17235.00	46.0 PK	68.2	-22.2	2.26 H	159	29.2	16.8
6	22980.00	-	-	-	-	-	-	-
7	#28725.00	-	-	-	-	-	-	-
8	#34470.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

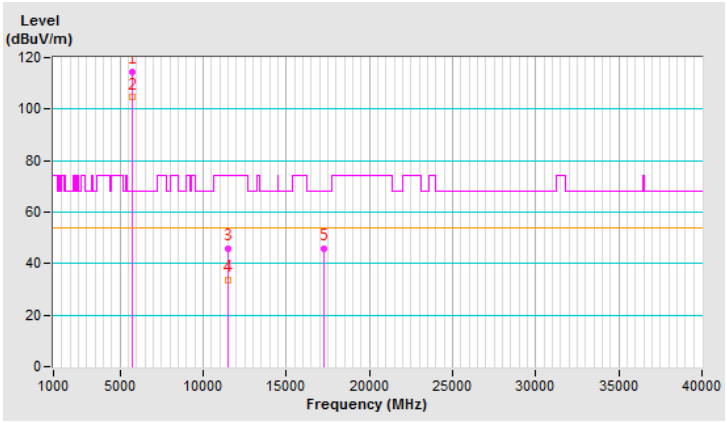


操 作 模 式 ：	發射	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 149：5.745 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=10Hz
量 測 場 地 溫 度 ：	23℃	量 測 場 地 濕 度 ：	67%RH
測 試 日 期 ：	109 年 1 月 22 日	測 試 者 ：	柯其宗

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5745.00	113.9 PK			4.00 V	346	110.6	3.3
2	*5745.00	103.9 AV			4.00 V	346	100.6	3.3
3	11490.00	45.2 PK	74.0	-28.8	2.62 V	160	32.6	12.6
4	11490.00	33.5 AV	54.0	-20.5	2.62 V	160	20.9	12.6
5	#17235.00	44.8 PK	68.2	-23.4	1.91 V	183	28.0	16.8
6	22980.00	-	-	-	-	-	-	-
7	#28725.00	-	-	-	-	-	-	-
8	#34470.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

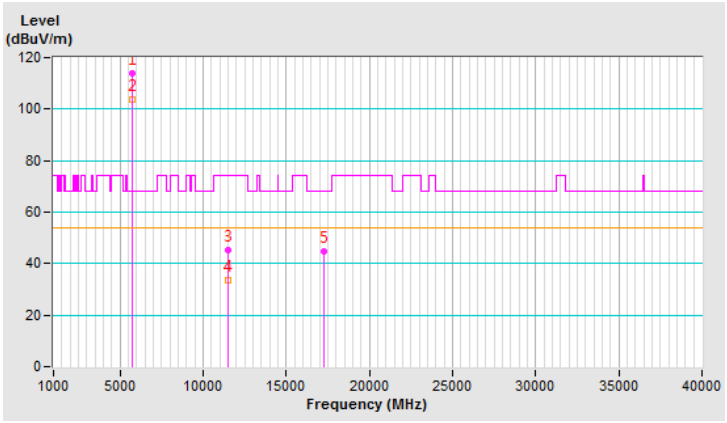


操 作 模 式 ：	發射	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 157：5.785 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=10Hz
量 測 場 地 溫 度 ：	23℃	量 測 場 地 濕 度 ：	67%RH
測 試 日 期 ：	109 年 1 月 22 日	測 試 者 ：	柯其宗

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5785.00	114.5 PK			2.12 H	66	111.1	3.4
2	*5785.00	104.3 AV			2.12 H	66	100.9	3.4
3	11570.00	46.0 PK	74.0	-28.0	1.34 H	26	33.8	12.2
4	11570.00	33.7 AV	54.0	-20.3	1.34 H	26	21.5	12.2
5	#17355.00	45.9 PK	68.2	-22.3	2.22 H	153	29.3	16.6
6	#23140.00	-	-	-	-	-	-	-
7	#28925.00	-	-	-	-	-	-	-
8	#34710.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

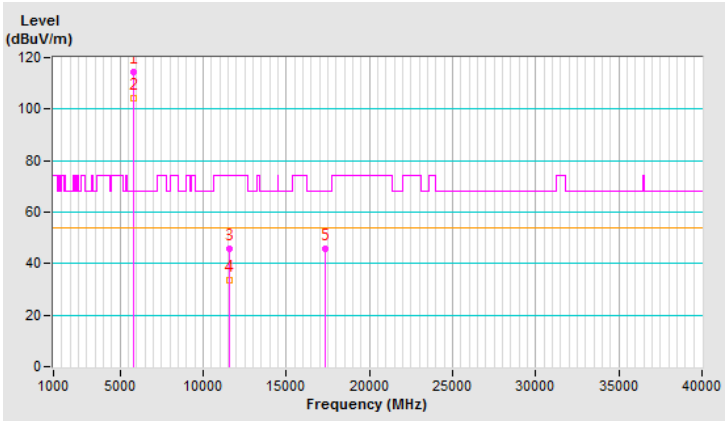


操 作 模 式 ：	發射	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 157：5.785 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=10Hz
量 測 場 地 溫 度 ：	23℃	量 測 場 地 濕 度 ：	67%RH
測 試 日 期 ：	109 年 1 月 22 日	測 試 者 ：	柯其宗

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5785.00	113.6 PK			3.99 V	352	110.2	3.4
2	*5785.00	103.7 AV			3.99 V	352	100.3	3.4
3	11570.00	45.9 PK	74.0	-28.1	2.65 V	156	33.7	12.2
4	11570.00	33.7 AV	54.0	-20.3	2.65 V	156	21.5	12.2
5	#17355.00	45.1 PK	68.2	-23.1	1.88 V	174	28.5	16.6
6	#23140.00	-	-	-	-	-	-	-
7	#28925.00	-	-	-	-	-	-	-
8	#34710.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

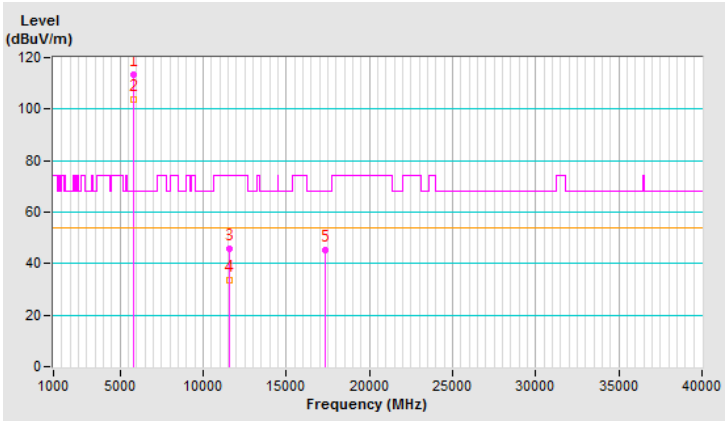


操 作 模 式 ：	發射	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 165：5.825 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=10Hz
量 測 場 地 溫 度 ：	23℃	量 測 場 地 濕 度 ：	67%RH
測 試 日 期 ：	109 年 1 月 22 日	測 試 者 ：	柯其宗

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5825.00	114.8 PK			2.13 H	60	111.2	3.6
2	*5825.00	104.4 AV			2.13 H	60	100.8	3.6
3	11650.00	46.0 PK	74.0	-28.0	1.44 H	40	33.6	12.4
4	11650.00	33.8 AV	54.0	-20.2	1.44 H	40	21.4	12.4
5	#17475.00	45.4 PK	68.2	-22.8	2.22 H	165	28.4	17.0
6	#23300.00	-	-	-	-	-	-	-
7	#29125.00	-	-	-	-	-	-	-
8	#34950.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

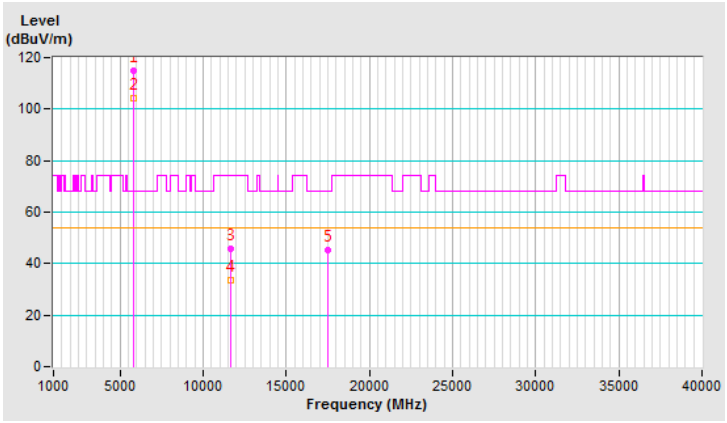


操 作 模 式 ：	發射	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 165：5.825 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=10Hz
量 測 場 地 溫 度 ：	23℃	量 測 場 地 濕 度 ：	67%RH
測 試 日 期 ：	109 年 1 月 22 日	測 試 者 ：	柯其宗

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5825.00	113.5 PK			3.94 V	354	109.9	3.6
2	*5825.00	103.5 AV			3.94 V	354	99.9	3.6
3	11650.00	45.3 PK	74.0	-28.7	2.69 V	145	32.9	12.4
4	11650.00	33.6 AV	54.0	-20.4	2.69 V	145	21.2	12.4
5	#17475.00	45.2 PK	68.2	-23.0	1.90 V	171	28.2	17.0
6	#23300.00	-	-	-	-	-	-	-
7	#29125.00	-	-	-	-	-	-	-
8	#34950.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

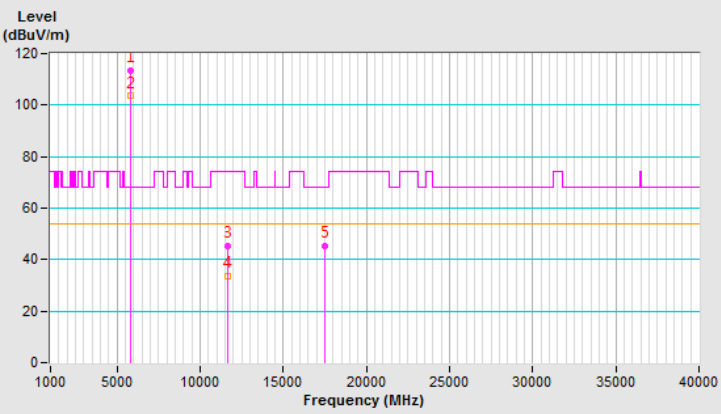


802.11ax (HE20)

操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 36：5.18 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	23℃	量 測 場 地 濕 度 ：	67%RH
測 試 日 期 ：	109 年 1 月 22 日	測 試 者 ：	柯其宗

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	68.6 PK	74.0	-5.4	2.64 H	68	65.6	3.0
2	5150.00	53.9 AV	54.0	-0.1	2.64 H	68	50.9	3.0
3	*5180.00	111.4 PK			2.64 H	68	108.5	2.9
4	*5180.00	99.3 AV			2.64 H	68	96.4	2.9
5	#10360.00	46.5 PK	68.2	-21.7	1.38 H	25	34.5	12.0
6	15540.00	45.6 PK	74.0	-28.4	2.24 H	173	32.6	13.0
7	15540.00	33.9 AV	54.0	-20.1	2.24 H	173	20.9	13.0
8	20720.00	-	-	-	-	-	-	-
9	#25900.00	-	-	-	-	-	-	-
10	#31080.00	-	-	-	-	-	-	-
11	#36260.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

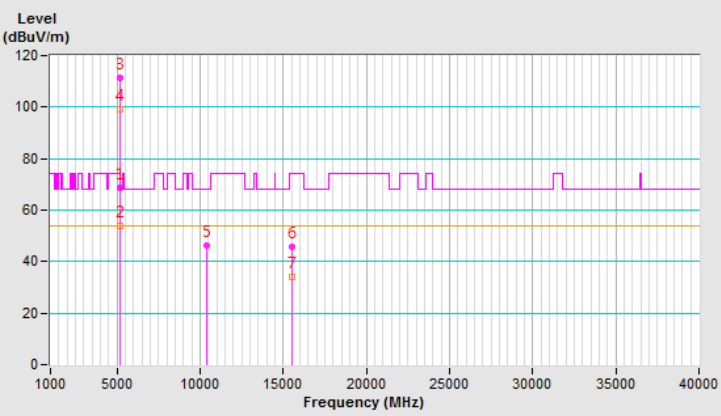


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 36：5.18 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	23℃	量 測 場 地 濕 度 ：	67%RH
測 試 日 期 ：	109 年 1 月 22 日	測 試 者 ：	柯其宗

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	66.3 PK	74.0	-7.7	3.77 V	3	63.3	3.0
2	5150.00	51.1 AV	54.0	-2.9	3.77 V	3	48.1	3.0
3	*5180.00	108.1 PK			3.77 V	3	105.2	2.9
4	*5180.00	95.8 AV			3.77 V	3	92.9	2.9
5	#10360.00	45.2 PK	68.2	-23.0	2.71 V	157	33.2	12.0
6	15540.00	45.0 PK	74.0	-29.0	1.93 V	184	32.0	13.0
7	15540.00	33.5 AV	54.0	-20.5	1.93 V	184	20.5	13.0
8	20720.00	-	-	-	-	-	-	-
9	#25900.00	-	-	-	-	-	-	-
10	#31080.00	-	-	-	-	-	-	-
11	#36260.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

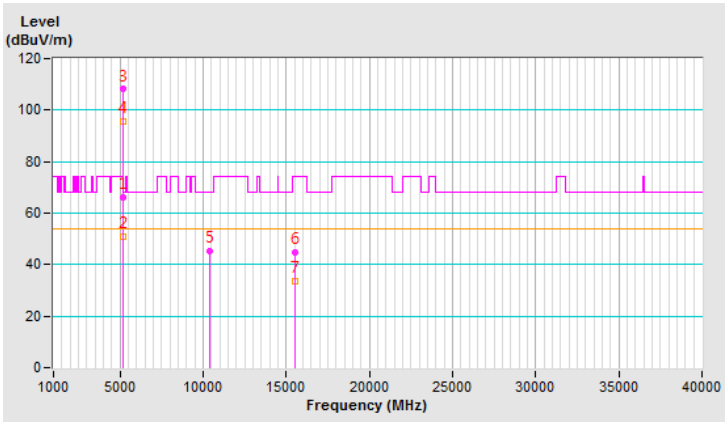


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 40：5.2 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	23℃	量 測 場 地 濕 度 ：	67%RH
測 試 日 期 ：	109 年 1 月 22 日	測 試 者 ：	柯其宗

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5200.00	112.2 PK			2.68 H	66	109.4	2.8
2	*5200.00	100.1 AV			2.68 H	66	97.3	2.8
3	#10400.00	46.1 PK	68.2	-22.1	1.39 H	48	34.0	12.1
4	15600.00	45.7 PK	74.0	-28.3	2.28 H	163	32.8	12.9
5	15600.00	33.7 AV	54.0	-20.3	2.28 H	163	20.8	12.9
6	20800.00	-	-	-	-	-	-	-
7	#26000.00	-	-	-	-	-	-	-
8	31200.00	-	-	-	-	-	-	-
9	#36400.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

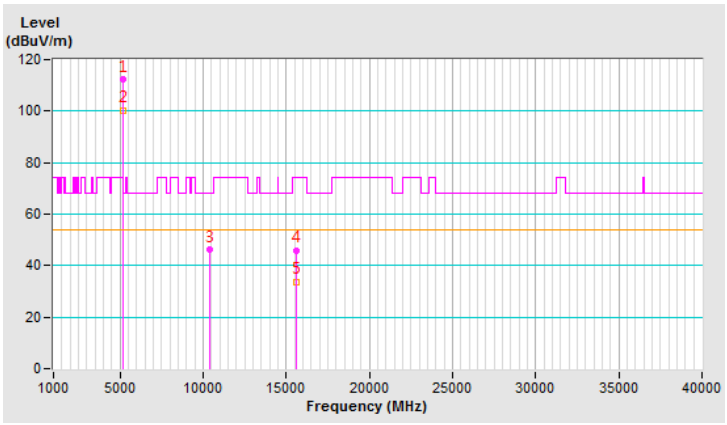


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 40：5.2 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	23℃	量 測 場 地 濕 度 ：	67%RH
測 試 日 期 ：	109 年 1 月 22 日	測 試 者 ：	柯其宗

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5200.00	109.0 PK			3.69 V	18	106.2	2.8
2	*5200.00	96.6 AV			3.69 V	18	93.8	2.8
3	#10400.00	45.4 PK	68.2	-22.8	2.65 V	142	33.3	12.1
4	15600.00	45.1 PK	74.0	-28.9	1.91 V	180	32.2	12.9
5	15600.00	33.3 AV	54.0	-20.7	1.91 V	180	20.4	12.9
6	20800.00	-	-	-	-	-	-	-
7	#26000.00	-	-	-	-	-	-	-
8	31200.00	-	-	-	-	-	-	-
9	#36400.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

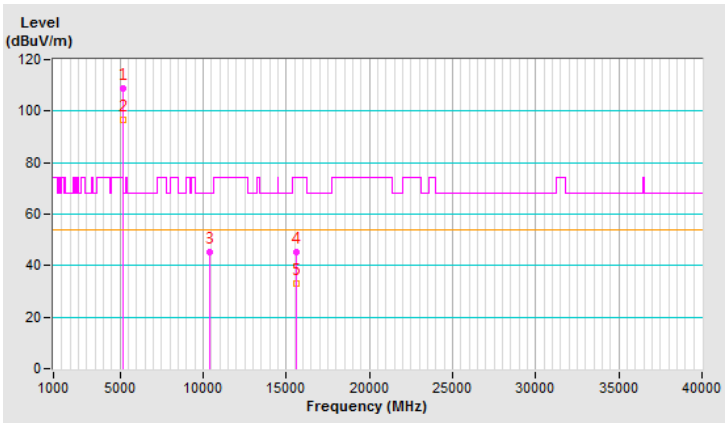


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 48：5.24 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	23℃	量 測 場 地 濕 度 ：	67%RH
測 試 日 期 ：	109 年 1 月 22 日	測 試 者 ：	柯其宗

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5240.00	112.2 PK			2.62 H	63	109.6	2.6
2	*5240.00	100.2 AV			2.62 H	63	97.6	2.6
3	5350.00	56.5 PK	74.0	-17.5	2.62 H	63	53.9	2.6
4	5350.00	43.7 AV	54.0	-10.3	2.62 H	63	41.1	2.6
5	#10480.00	45.6 PK	68.2	-22.6	1.44 H	26	33.1	12.5
6	15720.00	46.3 PK	74.0	-27.7	2.29 H	153	34.1	12.2
7	15720.00	34.2 AV	54.0	-19.8	2.29 H	153	22.0	12.2
8	20960.00	-	-	-	-	-	-	-
9	#26200.00	-	-	-	-	-	-	-
10	31440.00	-	-	-	-	-	-	-
11	#36680.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

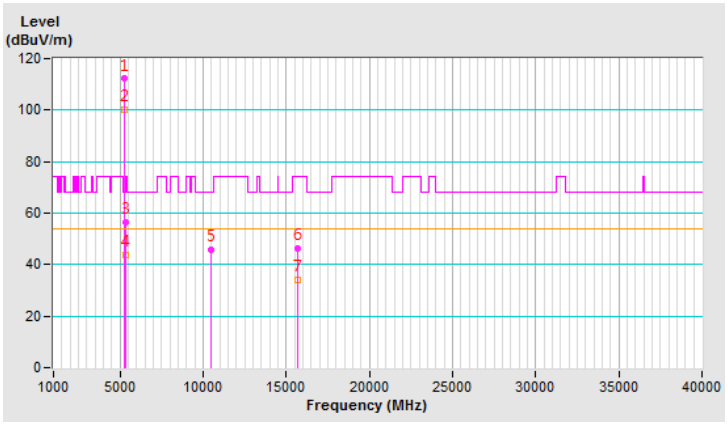


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 48：5.24 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	23℃	量 測 場 地 濕 度 ：	67%RH
測 試 日 期 ：	109 年 1 月 22 日	測 試 者 ：	柯其宗

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5240.00	109.0 PK			3.68 V	12	106.4	2.6
2	*5240.00	96.8 AV			3.68 V	12	94.2	2.6
3	5350.00	55.1 PK	74.0	-18.9	3.68 V	12	52.5	2.6
4	5350.00	42.6 AV	54.0	-11.4	3.68 V	12	40.0	2.6
5	#10480.00	45.7 PK	68.2	-22.5	2.64 V	146	33.2	12.5
6	15720.00	44.9 PK	74.0	-29.1	1.85 V	189	32.7	12.2
7	15720.00	33.2 AV	54.0	-20.8	1.85 V	189	21.0	12.2
8	20960.00	-	-	-	-	-	-	-
9	#26200.00	-	-	-	-	-	-	-
10	31440.00	-	-	-	-	-	-	-
11	#36680.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

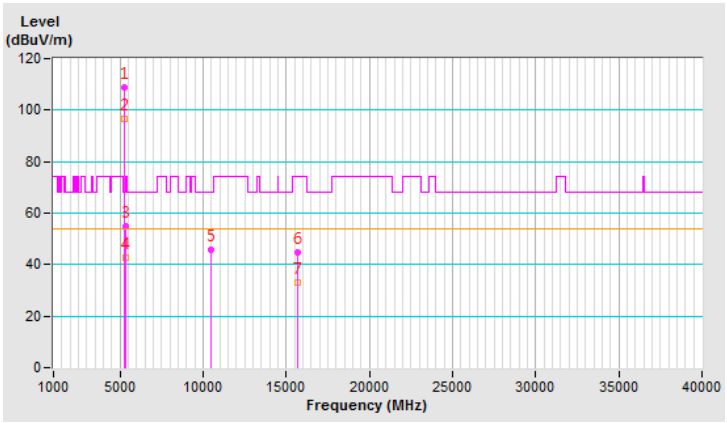


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 52：5.26 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	71%RH
測 試 日 期 ：	109 年 2 月 28 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	51.4 PK	74.0	-22.6	2.92 H	54	48.4	3.0
2	5150.00	42.5 AV	54.0	-11.5	2.92 H	54	39.5	3.0
3	*5260.00	114.8 PK			2.92 H	54	112.3	2.5
4	*5260.00	101.1 AV			2.92 H	54	98.6	2.5
5	#10520.00	43.2 PK	68.2	-25.0	3.51 H	184	30.6	12.6
6	15780.00	46.1 PK	74.0	-27.9	1.49 H	195	34.3	11.8
7	15780.00	35.2 AV	54.0	-18.8	1.49 H	195	23.4	11.8
8	21040.00	-	-	-	-	-	-	-
9	#26300.00	-	-	-	-	-	-	-
10	31560.00	-	-	-	-	-	-	-
11	#36820.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

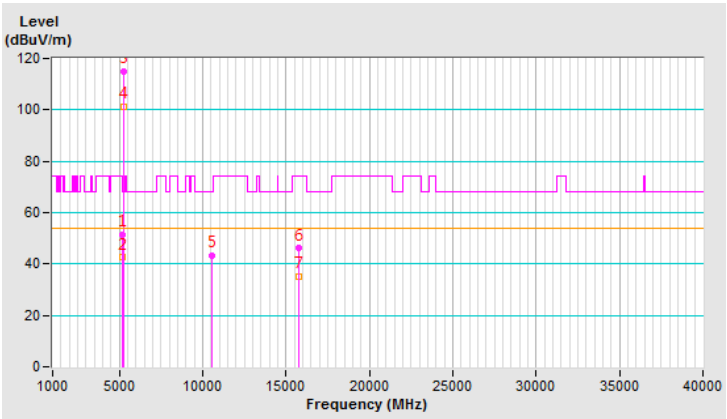


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 52：5.26 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	71%RH
測 試 日 期 ：	109 年 2 月 28 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	50.3 PK	74.0	-23.7	3.14 V	43	47.3	3.0
2	5150.00	38.6 AV	54.0	-15.4	3.14 V	43	35.6	3.0
3	*5260.00	108.4 PK			3.14 V	43	105.9	2.5
4	*5260.00	97.5 AV			3.14 V	43	95.0	2.5
5	#10520.00	43.9 PK	68.2	-24.3	3.11 V	195	31.3	12.6
6	15780.00	46.3 PK	74.0	-27.7	3.51 V	136	34.5	11.8
7	15780.00	33.7 AV	54.0	-20.3	3.51 V	136	21.9	11.8
8	21040.00	-	-	-	-	-	-	-
9	#26300.00	-	-	-	-	-	-	-
10	31560.00	-	-	-	-	-	-	-
11	#36820.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

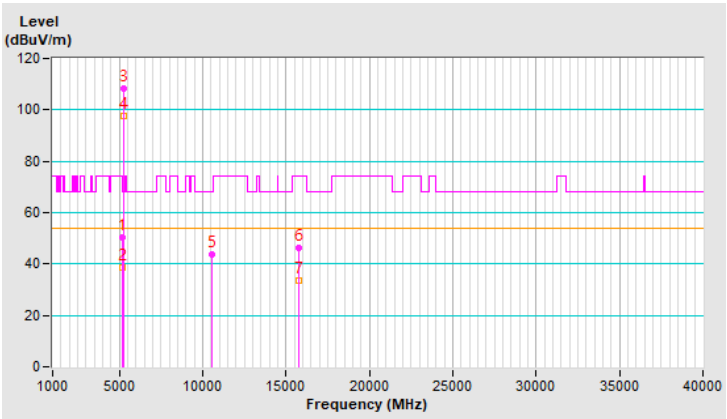


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 60：5.3 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	71%RH
測 試 日 期 ：	109 年 2 月 28 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	52.4 PK	74.0	-21.6	2.50 H	59	49.4	3.0
2	5150.00	40.1 AV	54.0	-13.9	2.50 H	59	37.1	3.0
3	*5300.00	114.4 PK			2.50 H	59	112.0	2.4
4	*5300.00	101.3 AV			2.50 H	59	98.9	2.4
5	5350.00	60.3 PK	74.0	-13.7	2.50 H	59	57.7	2.6
6	5350.00	43.8 AV	54.0	-10.2	2.50 H	59	41.2	2.6
7	10600.00	43.0 PK	74.0	-31.0	3.59 H	196	30.6	12.4
8	10600.00	29.7 AV	54.0	-24.3	3.59 H	196	17.3	12.4
9	15900.00	45.3 PK	74.0	-28.7	1.58 H	185	33.2	12.1
10	15900.00	34.3 AV	54.0	-19.7	1.58 H	185	22.2	12.1
11	21200.00	-	-	-	-	-	-	-
12	#26500.00	-	-	-	-	-	-	-
13	31800.00	-	-	-	-	-	-	-
14	#37100.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

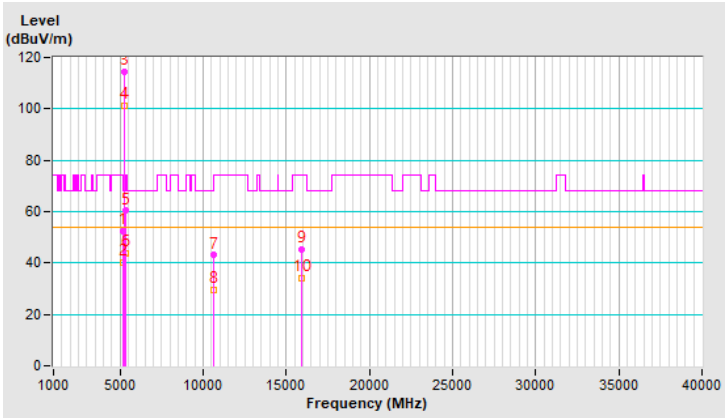


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 60：5.3 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	71%RH
測 試 日 期 ：	109 年 2 月 28 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	50.8 PK	74.0	-23.2	3.14 V	47	47.8	3.0
2	5150.00	38.7 AV	54.0	-15.3	3.14 V	47	35.7	3.0
3	*5300.00	108.7 PK			3.14 V	47	106.3	2.4
4	*5300.00	97.6 AV			3.14 V	47	95.2	2.4
5	5350.00	56.6 PK	74.0	-17.4	3.14 V	47	54.0	2.6
6	5350.00	40.6 AV	54.0	-13.4	3.14 V	47	38.0	2.6
7	10600.00	44.1 PK	74.0	-29.9	3.13 V	187	31.7	12.4
8	10600.00	31.1 AV	54.0	-22.9	3.13 V	187	18.7	12.4
9	15900.00	45.2 PK	74.0	-28.8	3.49 V	150	33.1	12.1
10	15900.00	34.6 AV	54.0	-19.4	3.49 V	150	22.5	12.1
11	21200.00	-	-	-	-	-	-	-
12	#26500.00	-	-	-	-	-	-	-
13	31800.00	-	-	-	-	-	-	-
14	#37100.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

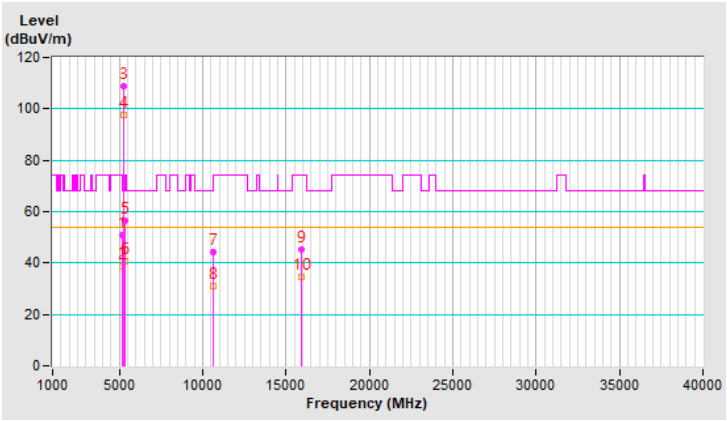


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 64：5.32 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	71%RH
測 試 日 期 ：	109 年 2 月 28 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5320.00	112.6 PK			2.83 H	61	110.1	2.5
2	*5320.00	99.4 AV			2.83 H	61	96.9	2.5
3	5350.00	70.0 PK	74.0	-4.0	2.83 H	61	67.4	2.6
4	5350.00	53.7 AV	54.0	-0.3	2.83 H	61	51.1	2.6
5	10640.00	42.9 PK	74.0	-31.1	3.52 H	190	30.5	12.4
6	10640.00	30.1 AV	54.0	-23.9	3.52 H	190	17.7	12.4
7	15960.00	46.2 PK	74.0	-27.8	1.55 H	176	33.8	12.4
8	15960.00	34.8 AV	54.0	-19.2	1.55 H	176	22.4	12.4
9	21280.00	-	-	-	-	-	-	-
10	#26600.00	-	-	-	-	-	-	-
11	#31920.00	-	-	-	-	-	-	-
12	#37240.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

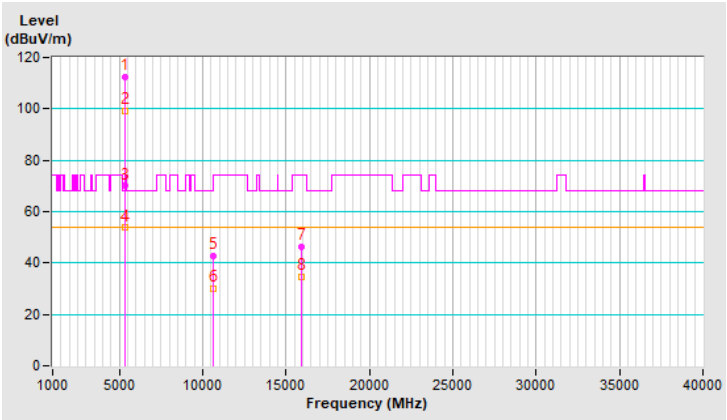


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 64：5.32 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	71%RH
測 試 日 期 ：	109 年 2 月 28 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5320.00	109.7 PK			3.14 V	51	107.2	2.5
2	*5320.00	96.0 AV			3.14 V	51	93.5	2.5
3	5350.00	64.5 PK	74.0	-9.5	3.14 V	51	61.9	2.6
4	5350.00	49.9 AV	54.0	-4.1	3.14 V	51	47.3	2.6
5	10640.00	44.0 PK	74.0	-30.0	3.09 V	182	31.6	12.4
6	10640.00	30.9 AV	54.0	-23.1	3.09 V	182	18.5	12.4
7	15960.00	45.9 PK	74.0	-28.1	3.46 V	143	33.5	12.4
8	15960.00	34.1 AV	54.0	-19.9	3.46 V	143	21.7	12.4
9	21280.00	-	-	-	-	-	-	-
10	#26600.00	-	-	-	-	-	-	-
11	#31920.00	-	-	-	-	-	-	-
12	#37240.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

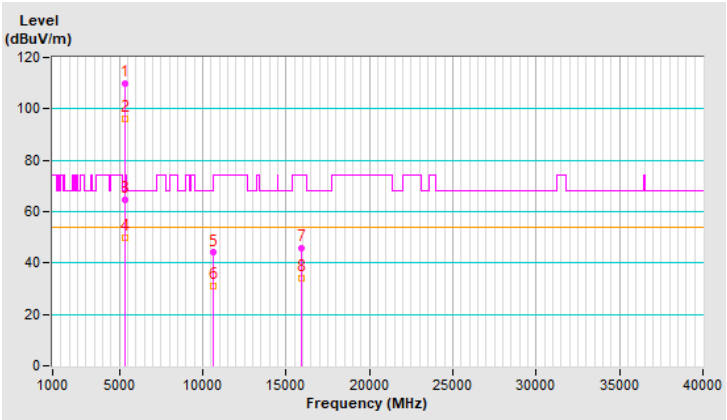


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 100：5.5 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	71%RH
測 試 日 期 ：	109 年 2 月 28 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1000.00	42.4 PK	74.0	-31.6	3.53 H	202	49.4	-7.0
2	1000.00	29.7 AV	54.0	-24.3	3.53 H	202	36.7	-7.0
3	5460.00	63.0 PK	74.0	-11.0	2.00 H	50	60.0	3.0
4	5460.00	41.7 AV	54.0	-12.3	2.00 H	50	38.7	3.0
5	#5470.00	67.8 PK	68.2	-0.4	2.00 H	50	64.7	3.1
6	*5500.00	110.9 PK			2.00 H	50	107.8	3.1
7	*5500.00	98.8 AV			2.00 H	50	95.7	3.1
8	11000.00	-	-	-	-	-	-	-
9	#16500.00	46.2 PK	68.2	-22.0	1.52 H	186	32.6	13.6
10	#22000.00	-	-	-	-	-	-	-
11	#27500.00	-	-	-	-	-	-	-
12	#33000.00	-	-	-	-	-	-	-
13	#38500.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

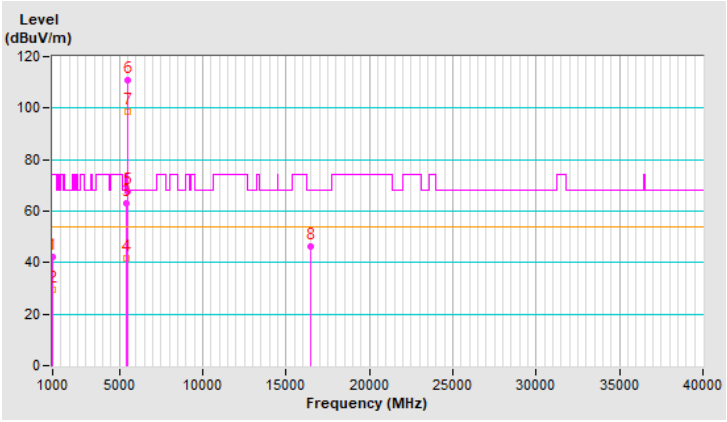


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 100：5.5 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	71%RH
測 試 日 期 ：	109 年 2 月 28 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	61.7 PK	74.0	-12.3	3.16 V	27	58.7	3.0
2	5460.00	40.5 AV	54.0	-13.5	3.16 V	27	37.5	3.0
3	#5470.00	64.9 PK	68.2	-3.3	3.16 V	27	61.8	3.1
4	*5500.00	109.4 PK			3.16 V	27	106.3	3.1
5	*5500.00	95.6 AV			3.16 V	27	92.5	3.1
6	11000.00	44.1 PK	74.0	-29.9	3.18 V	184	31.5	12.6
7	11000.00	30.8 AV	54.0	-23.2	3.18 V	184	18.2	12.6
8	#16500.00	46.1 PK	68.2	-22.1	3.53 V	148	32.5	13.6
9	#22000.00	-	-	-	-	-	-	-
10	#27500.00	-	-	-	-	-	-	-
11	#33000.00	-	-	-	-	-	-	-
12	#38500.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

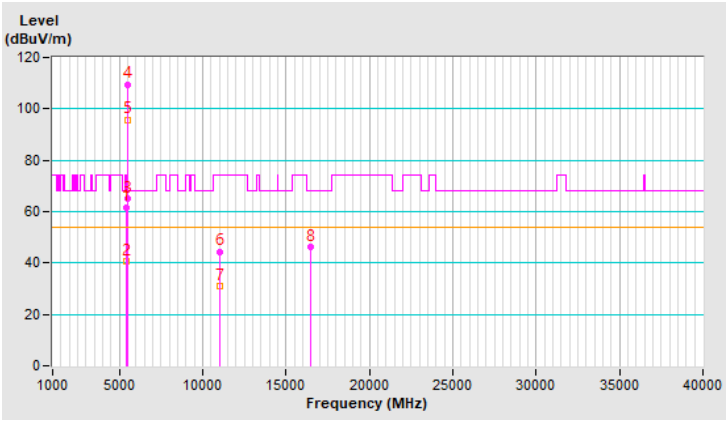


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 116：5.58 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	71%RH
測 試 日 期 ：	109 年 2 月 28 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	51.8 PK	74.0	-22.2	2.06 H	54	48.8	3.0
2	5460.00	38.7 AV	54.0	-15.3	2.06 H	54	35.7	3.0
3	#5470.00	51.2 PK	68.2	-17.0	2.06 H	54	48.1	3.1
4	*5580.00	111.6 PK			2.06 H	54	108.6	3.0
5	*5580.00	100.5 AV			2.06 H	54	97.5	3.0
6	11160.00	43.0 PK	74.0	-31.0	3.59 H	183	30.6	12.4
7	11160.00	30.0 AV	54.0	-24.0	3.59 H	183	17.6	12.4
8	#16740.00	45.8 PK	68.2	-22.4	1.55 H	168	31.0	14.8
9	22320.00	-	-	-	-	-	-	-
10	#27900.00	-	-	-	-	-	-	-
11	#33480.00	-	-	-	-	-	-	-
12	39060.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

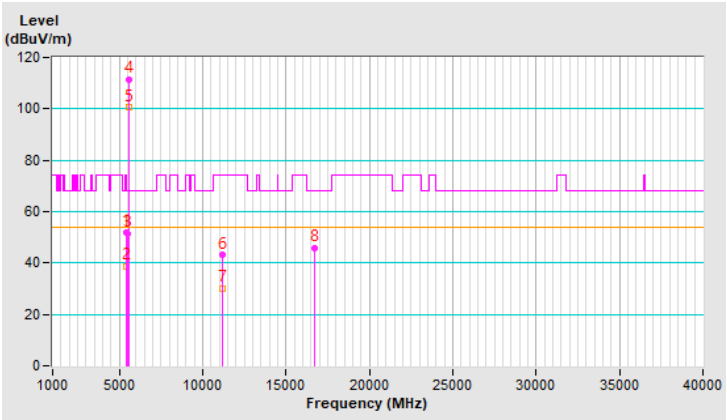


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 116：5.58 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	71%RH
測 試 日 期 ：	109 年 2 月 28 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	50.4 PK	74.0	-23.6	3.23 V	32	47.4	3.0
2	5460.00	36.8 AV	54.0	-17.2	3.23 V	32	33.8	3.0
3	#5470.00	50.8 PK	68.2	-17.4	3.23 V	32	47.7	3.1
4	*5580.00	108.6 PK			3.23 V	32	105.6	3.0
5	*5580.00	97.5 AV			3.23 V	32	94.5	3.0
6	11160.00	43.4 PK	74.0	-30.6	3.18 V	193	31.0	12.4
7	11160.00	30.1 AV	54.0	-23.9	3.18 V	193	17.7	12.4
8	#16740.00	45.5 PK	68.2	-22.7	3.55 V	138	30.7	14.8
9	22320.00	-	-	-	-	-	-	-
10	#27900.00	-	-	-	-	-	-	-
11	#33480.00	-	-	-	-	-	-	-
12	39060.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

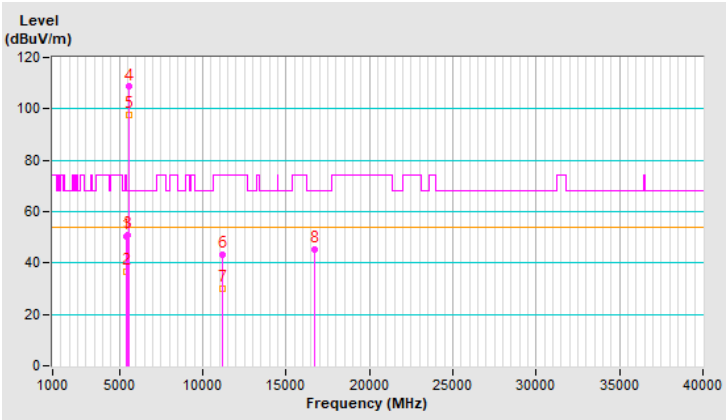


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 140：5.7 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	71%RH
測 試 日 期 ：	109 年 2 月 28 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5700.00	108.7 PK			1.57 H	58	105.5	3.2
2	*5700.00	96.3 AV			1.57 H	58	93.1	3.2
3	#5725.00	67.9 PK	68.2	-0.3	1.57 H	58	64.6	3.3
4	11400.00	42.2 PK	74.0	-31.8	3.60 H	200	29.2	13.0
5	11400.00	29.3 AV	54.0	-24.7	3.60 H	200	16.3	13.0
6	#17100.00	45.9 PK	68.2	-22.3	1.59 H	181	29.6	16.3
7	22800.00	-	-	-	-	-	-	-
8	#28500.00	-	-	-	-	-	-	-
9	#34200.00	-	-	-	-	-	-	-
10	39900.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

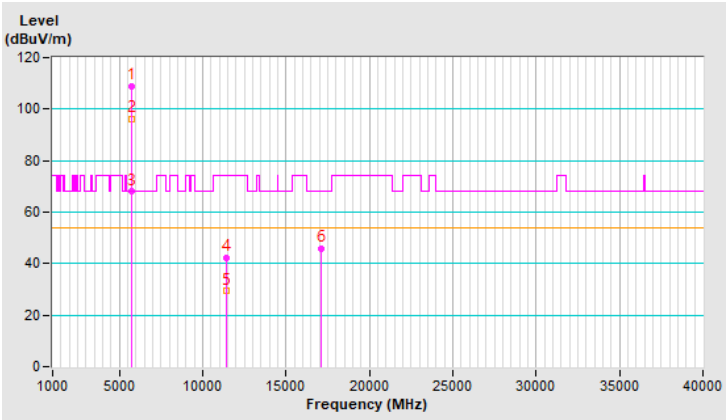


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 140：5.7 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	71%RH
測 試 日 期 ：	109 年 2 月 28 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5700.00	106.1 PK			3.15 V	47	102.9	3.2
2	*5700.00	93.7 AV			3.15 V	47	90.5	3.2
3	#5725.00	64.2 PK	68.2	-4.0	3.15 V	47	60.9	3.3
4	11400.00	43.4 PK	74.0	-30.6	3.08 V	190	30.4	13.0
5	11400.00	30.3 AV	54.0	-23.7	3.08 V	190	17.3	13.0
6	#17100.00	45.4 PK	68.2	-22.8	3.48 V	159	29.1	16.3
7	22800.00	-	-	-	-	-	-	-
8	#28500.00	-	-	-	-	-	-	-
9	#34200.00	-	-	-	-	-	-	-
10	39900.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

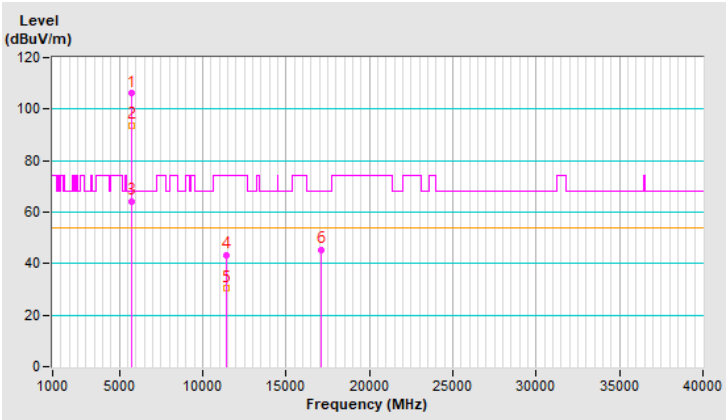


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 144：5.72 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	71%RH
測 試 日 期 ：	109 年 2 月 28 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	49.3 PK	74.0	-24.7	1.50 H	56	46.3	3.0
2	5460.00	36.9 AV	54.0	-17.1	1.50 H	56	33.9	3.0
3	#5470.00	48.9 PK	68.2	-19.3	1.50 H	56	45.8	3.1
4	*5720.00	112.0 PK			1.50 H	56	108.8	3.2
5	*5720.00	99.9 AV			1.50 H	56	96.7	3.2
6	#5850.00	50.6 PK	68.2	-17.6	1.50 H	56	46.9	3.7
7	11440.00	42.8 PK	74.0	-31.2	3.58 H	190	30.0	12.8
8	11440.00	29.7 AV	54.0	-24.3	3.58 H	190	16.9	12.8
9	#17160.00	45.2 PK	68.2	-23.0	1.55 H	174	28.6	16.6
10	22880.00	-	-	-	-	-	-	-
11	#28600.00	-	-	-	-	-	-	-
12	#34320.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

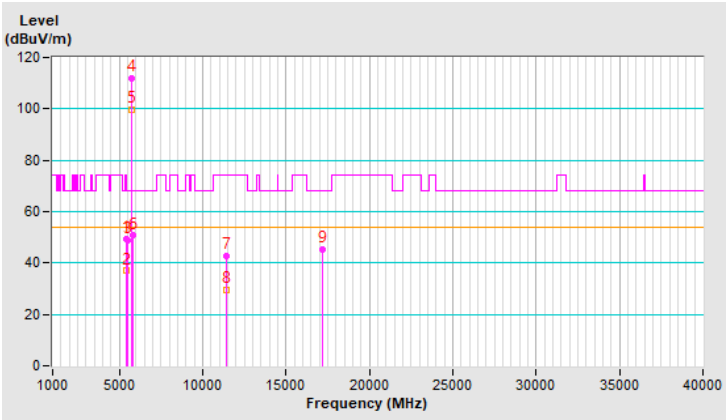


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 144：5.72 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	71%RH
測 試 日 期 ：	109 年 2 月 28 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	48.4 PK	74.0	-25.6	3.16 V	44	45.4	3.0
2	5460.00	35.4 AV	54.0	-18.6	3.16 V	44	32.4	3.0
3	#5470.00	46.7 PK	68.2	-21.5	3.16 V	44	43.6	3.1
4	*5720.00	108.9 PK			3.16 V	44	105.7	3.2
5	*5720.00	97.6 AV			3.16 V	44	94.4	3.2
6	#5850.00	50.2 PK	68.2	-18.0	3.16 V	44	46.5	3.7
7	11440.00	43.7 PK	74.0	-30.3	3.16 V	204	30.9	12.8
8	11440.00	30.6 AV	54.0	-23.4	3.16 V	204	17.8	12.8
9	#17160.00	45.6 PK	68.2	-22.6	3.50 V	159	29.0	16.6
10	22880.00	-	-	-	-	-	-	-
11	#28600.00	-	-	-	-	-	-	-
12	#34320.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

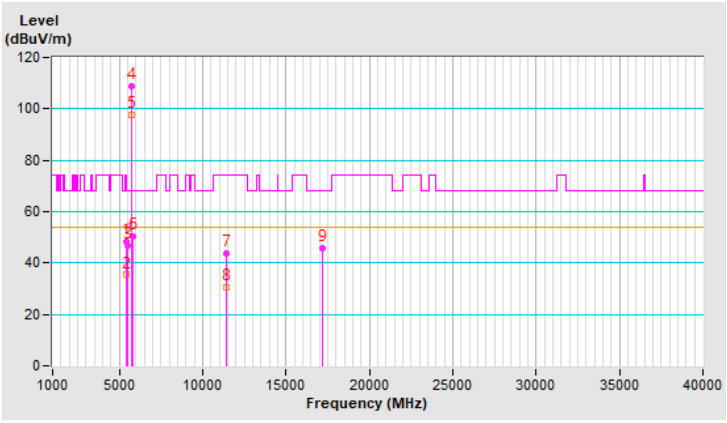


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 149：5.745 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	23℃	量 測 場 地 濕 度 ：	67%RH
測 試 日 期 ：	109 年 1 月 22 日	測 試 者 ：	柯其宗

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5745.00	113.4 PK			2.07 H	50	110.1	3.3
2	*5745.00	101.2 AV			2.07 H	50	97.9	3.3
3	11490.00	46.7 PK	74.0	-27.3	1.33 H	26	34.1	12.6
4	11490.00	34.5 AV	54.0	-19.5	1.33 H	26	21.9	12.6
5	#17235.00	46.2 PK	68.2	-22.0	2.24 H	163	29.4	16.8
6	22980.00	-	-	-	-	-	-	-
7	#28725.00	-	-	-	-	-	-	-
8	#34470.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

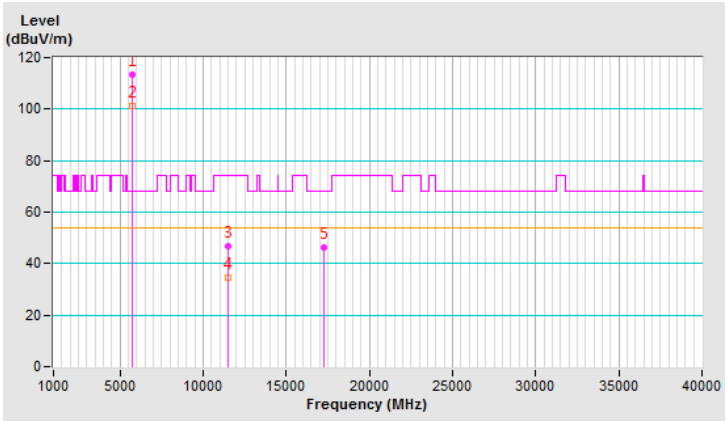


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 149：5.745 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	23℃	量 測 場 地 濕 度 ：	67%RH
測 試 日 期 ：	109 年 1 月 22 日	測 試 者 ：	柯其宗

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5745.00	112.4 PK			3.99 V	349	109.1	3.3
2	*5745.00	100.2 AV			3.99 V	349	96.9	3.3
3	11490.00	46.1 PK	74.0	-27.9	2.67 V	155	33.5	12.6
4	11490.00	33.9 AV	54.0	-20.1	2.67 V	155	21.3	12.6
5	#17235.00	44.8 PK	68.2	-23.4	1.88 V	178	28.0	16.8
6	22980.00	-	-	-	-	-	-	-
7	#28725.00	-	-	-	-	-	-	-
8	#34470.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

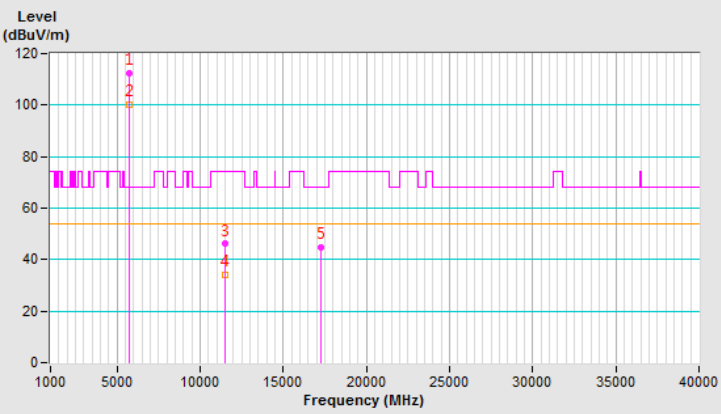


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 157：5.785 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	23℃	量 測 場 地 濕 度 ：	67%RH
測 試 日 期 ：	109 年 1 月 22 日	測 試 者 ：	柯其宗

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5785.00	113.7 PK			2.03 H	56	110.3	3.4
2	*5785.00	101.5 AV			2.03 H	56	98.1	3.4
3	11570.00	45.9 PK	74.0	-28.1	1.38 H	48	33.7	12.2
4	11570.00	33.7 AV	54.0	-20.3	1.38 H	48	21.5	12.2
5	#17355.00	46.1 PK	68.2	-22.1	2.31 H	157	29.5	16.6
6	#23140.00	-	-	-	-	-	-	-
7	#28925.00	-	-	-	-	-	-	-
8	#34710.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

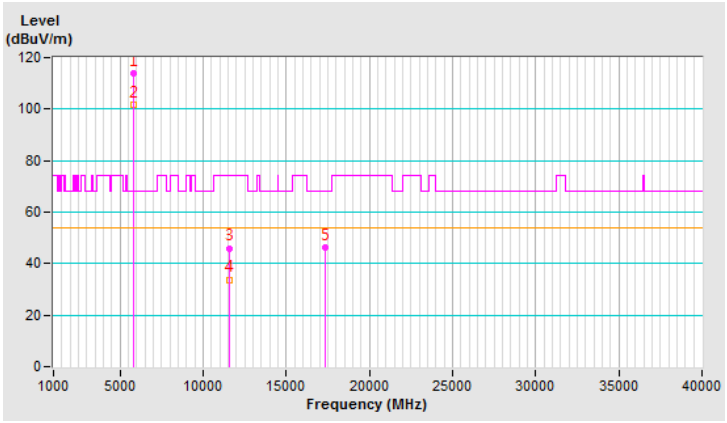


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 157：5.785 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	23℃	量 測 場 地 濕 度 ：	67%RH
測 試 日 期 ：	109 年 1 月 22 日	測 試 者 ：	柯其宗

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5785.00	112.6 PK			3.98 V	347	109.2	3.4
2	*5785.00	100.4 AV			3.98 V	347	97.0	3.4
3	11570.00	45.9 PK	74.0	-28.1	2.65 V	161	33.7	12.2
4	11570.00	33.9 AV	54.0	-20.1	2.65 V	161	21.7	12.2
5	#17355.00	44.8 PK	68.2	-23.4	1.90 V	192	28.2	16.6
6	#23140.00	-	-	-	-	-	-	-
7	#28925.00	-	-	-	-	-	-	-
8	#34710.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

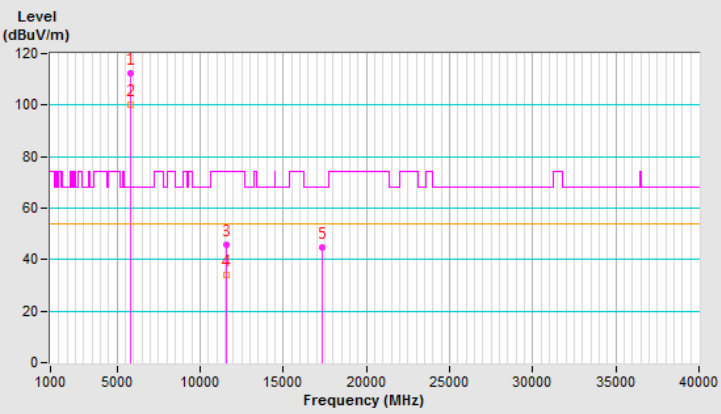


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 165：5.825 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	23℃	量 測 場 地 濕 度 ：	67%RH
測 試 日 期 ：	109 年 1 月 22 日	測 試 者 ：	柯其宗

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5825.00	113.7 PK			2.11 H	61	110.1	3.6
2	*5825.00	101.3 AV			2.11 H	61	97.7	3.6
3	11650.00	46.1 PK	74.0	-27.9	1.34 H	45	33.7	12.4
4	11650.00	33.9 AV	54.0	-20.1	1.34 H	45	21.5	12.4
5	#17475.00	45.2 PK	68.2	-23.0	2.27 H	152	28.2	17.0
6	#23300.00	-	-	-	-	-	-	-
7	#29125.00	-	-	-	-	-	-	-
8	#34950.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

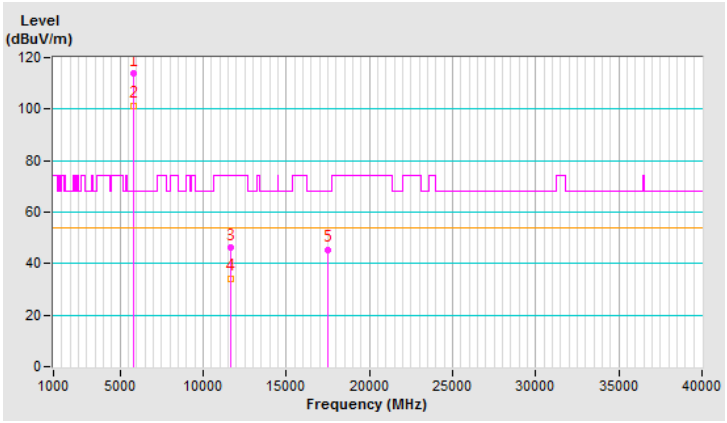


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 165：5.825 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	23℃	量 測 場 地 濕 度 ：	67%RH
測 試 日 期 ：	109 年 1 月 22 日	測 試 者 ：	柯其宗

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5825.00	113.0 PK			3.94 V	346	109.4	3.6
2	*5825.00	100.5 AV			3.94 V	346	96.9	3.6
3	11650.00	46.0 PK	74.0	-28.0	2.66 V	147	33.6	12.4
4	11650.00	33.9 AV	54.0	-20.1	2.66 V	147	21.5	12.4
5	#17475.00	45.4 PK	68.2	-22.8	1.88 V	182	28.4	17.0
6	#23300.00	-	-	-	-	-	-	-
7	#29125.00	-	-	-	-	-	-	-
8	#34950.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

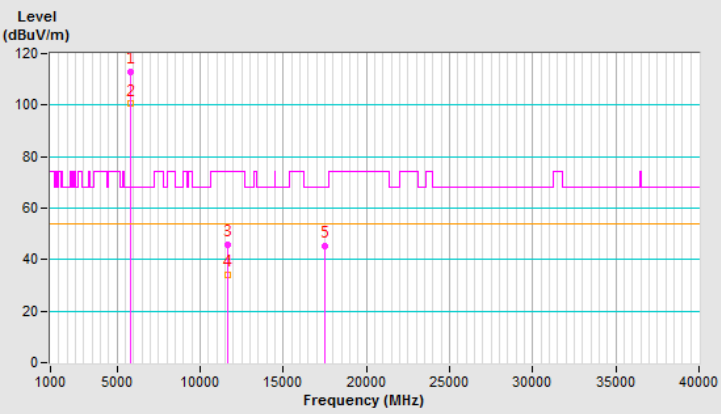


802.11ax (HE40)

操作模式：	發射	調變技術：	OFDMA
基本波頻率：	CH 38：5.19 GHz	測試儀器：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=2kHz
量測場地溫度：	23℃	量測場地濕度：	67%RH
測試日期：	109 年 1 月 22 日	測試者：	柯其宗

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	69.4 PK	74.0	-4.6	2.48 H	54	66.4	3.0
2	5150.00	53.7 AV	54.0	-0.3	2.48 H	54	50.7	3.0
3	*5190.00	106.6 PK			2.48 H	54	103.7	2.9
4	*5190.00	94.4 AV			2.48 H	54	91.5	2.9
5	#10380.00	46.0 PK	68.2	-22.2	1.37 H	36	33.8	12.2
6	15570.00	45.5 PK	74.0	-28.5	2.28 H	142	32.5	13.0
7	15570.00	33.8 AV	54.0	-20.2	2.28 H	142	20.8	13.0
8	20760.00	-	-	-	-	-	-	-
9	#25950.00	-	-	-	-	-	-	-
10	#31140.00	-	-	-	-	-	-	-
11	#36330.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

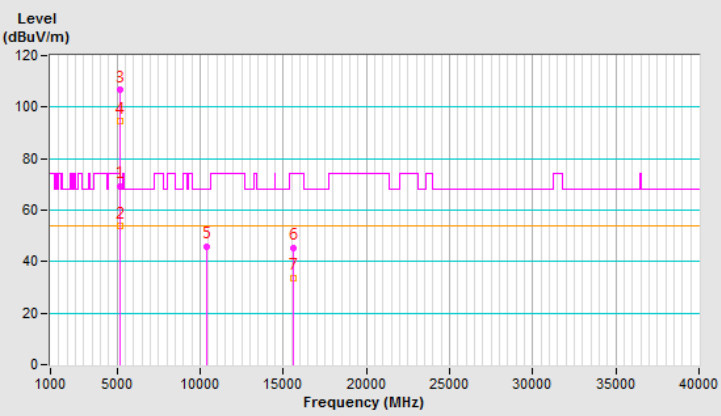


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 38：5.19 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=2kHz
量 測 場 地 溫 度 ：	23℃	量 測 場 地 濕 度 ：	67%RH
測 試 日 期 ：	109 年 1 月 22 日	測 試 者 ：	柯其宗

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	67.3 PK	74.0	-6.7	3.70 V	2	64.3	3.0
2	5150.00	51.3 AV	54.0	-2.7	3.70 V	2	48.3	3.0
3	*5190.00	104.3 PK			3.70 V	2	101.4	2.9
4	*5190.00	91.9 AV			3.70 V	2	89.0	2.9
5	#10380.00	46.0 PK	68.2	-22.2	2.68 V	135	33.8	12.2
6	15570.00	45.6 PK	74.0	-28.4	1.93 V	165	32.6	13.0
7	15570.00	33.6 AV	54.0	-20.4	1.93 V	165	20.6	13.0
8	20760.00	-	-	-	-	-	-	-
9	#25950.00	-	-	-	-	-	-	-
10	#31140.00	-	-	-	-	-	-	-
11	#36330.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

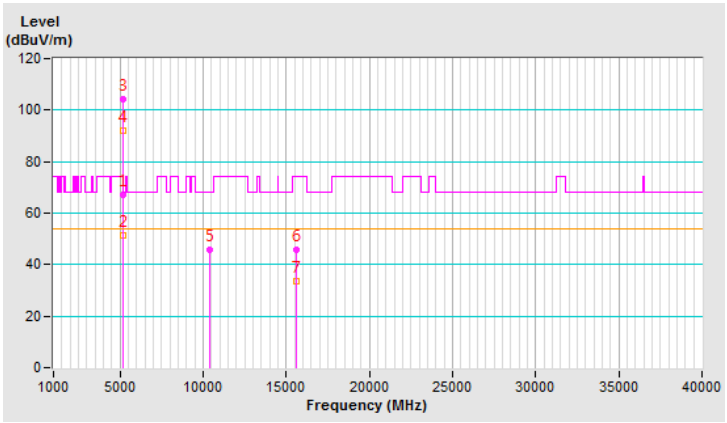


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 46：5.23 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=2kHz
量 測 場 地 溫 度 ：	23℃	量 測 場 地 濕 度 ：	67%RH
測 試 日 期 ：	109 年 1 月 22 日	測 試 者 ：	柯其宗

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	67.9 PK	74.0	-6.1	2.45 H	40	64.9	3.0
2	5150.00	52.7 AV	54.0	-1.3	2.45 H	40	49.7	3.0
3	*5230.00	110.2 PK			2.45 H	40	107.6	2.6
4	*5230.00	97.8 AV			2.45 H	40	95.2	2.6
5	5350.00	57.7 PK	74.0	-16.3	2.45 H	40	55.1	2.6
6	5350.00	44.6 AV	54.0	-9.4	2.45 H	40	42.0	2.6
7	#10460.00	46.6 PK	68.2	-21.6	1.34 H	41	34.2	12.4
8	15690.00	45.3 PK	74.0	-28.7	2.28 H	169	32.9	12.4
9	15690.00	33.5 AV	54.0	-20.5	2.28 H	169	21.1	12.4
10	20920.00	-	-	-	-	-	-	-
11	#26150.00	-	-	-	-	-	-	-
12	31380.00	-	-	-	-	-	-	-
13	#36610.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

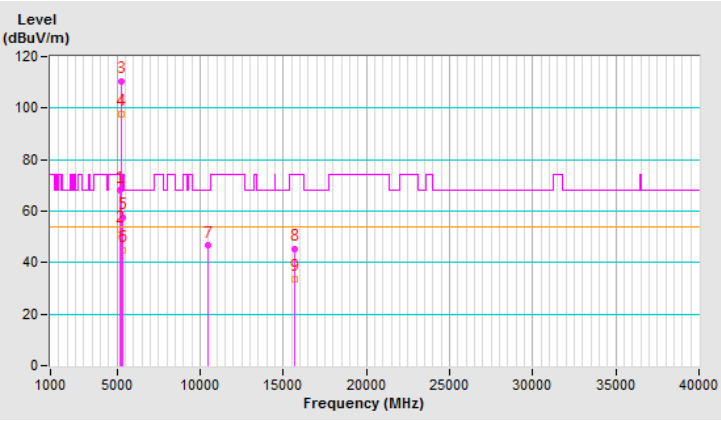


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 46：5.23 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=2kHz
量 測 場 地 溫 度 ：	23℃	量 測 場 地 濕 度 ：	67%RH
測 試 日 期 ：	109 年 1 月 22 日	測 試 者 ：	柯其宗

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	65.1 PK	74.0	-8.9	3.72 V	18	62.1	3.0
2	5150.00	48.7 AV	54.0	-5.3	3.72 V	18	45.7	3.0
3	*5230.00	108.1 PK			3.72 V	18	105.5	2.6
4	*5230.00	95.3 AV			3.72 V	18	92.7	2.6
5	5350.00	56.3 PK	74.0	-17.7	3.72 V	18	53.7	2.6
6	5350.00	44.1 AV	54.0	-9.9	3.72 V	18	41.5	2.6
7	#10460.00	46.3 PK	68.2	-21.9	2.66 V	144	33.9	12.4
8	15690.00	45.3 PK	74.0	-28.7	1.92 V	163	32.9	12.4
9	15690.00	33.8 AV	54.0	-20.2	1.92 V	163	21.4	12.4
10	20920.00	-	-	-	-	-	-	-
11	#26150.00	-	-	-	-	-	-	-
12	31380.00	-	-	-	-	-	-	-
13	#36610.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

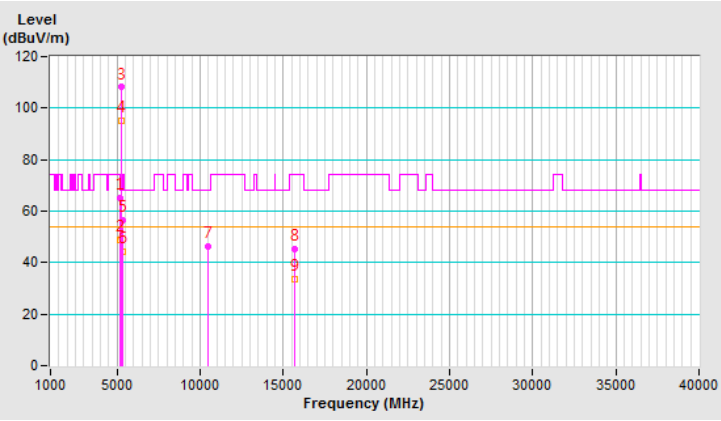


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 54：5.27 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=2kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	71%RH
測 試 日 期 ：	109 年 2 月 28 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	53.6 PK	74.0	-20.4	2.19 H	55	50.6	3.0
2	5150.00	43.9 AV	54.0	-10.1	2.19 H	55	40.9	3.0
3	*5270.00	109.7 PK			2.19 H	55	107.2	2.5
4	*5270.00	97.4 AV			2.19 H	55	94.9	2.5
5	5350.00	63.2 PK	74.0	-10.8	2.19 H	55	60.6	2.6
6	5350.00	49.4 AV	54.0	-4.6	2.19 H	55	46.8	2.6
7	#10540.00	42.2 PK	68.2	-26.0	3.52 H	188	29.6	12.6
8	15810.00	46.5 PK	74.0	-27.5	1.52 H	195	34.8	11.7
9	15810.00	35.2 AV	54.0	-18.8	1.52 H	195	23.5	11.7
10	21080.00	-	-	-	-	-	-	-
11	#26350.00	-	-	-	-	-	-	-
12	31620.00	-	-	-	-	-	-	-
13	#36890.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

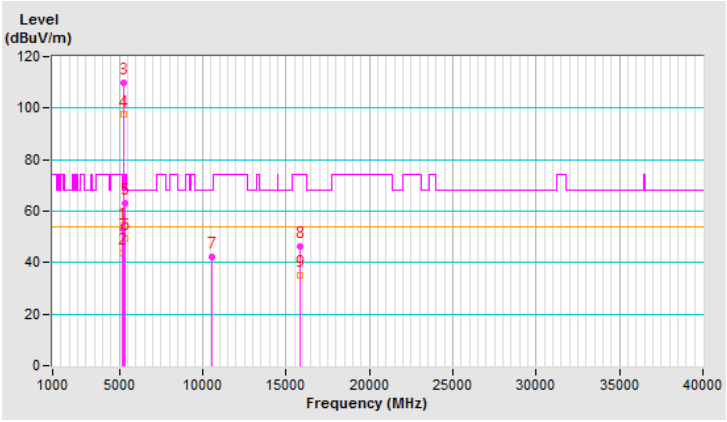


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 54：5.27 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=2kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	71%RH
測 試 日 期 ：	109 年 2 月 28 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	50.2 PK	74.0	-23.8	3.17 V	39	47.2	3.0
2	5150.00	40.7 AV	54.0	-13.3	3.17 V	39	37.7	3.0
3	*5270.00	107.1 PK			3.17 V	39	104.6	2.5
4	*5270.00	94.6 AV			3.17 V	39	92.1	2.5
5	5350.00	60.9 PK	74.0	-13.1	3.17 V	39	58.3	2.6
6	5350.00	47.3 AV	54.0	-6.7	3.17 V	39	44.7	2.6
7	#10540.00	43.9 PK	68.2	-24.3	3.12 V	195	31.3	12.6
8	15810.00	45.3 PK	74.0	-28.7	3.54 V	158	33.6	11.7
9	15810.00	34.4 AV	54.0	-19.6	3.54 V	158	22.7	11.7
10	21080.00	-	-	-	-	-	-	-
11	#26350.00	-	-	-	-	-	-	-
12	31620.00	-	-	-	-	-	-	-
13	#36890.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

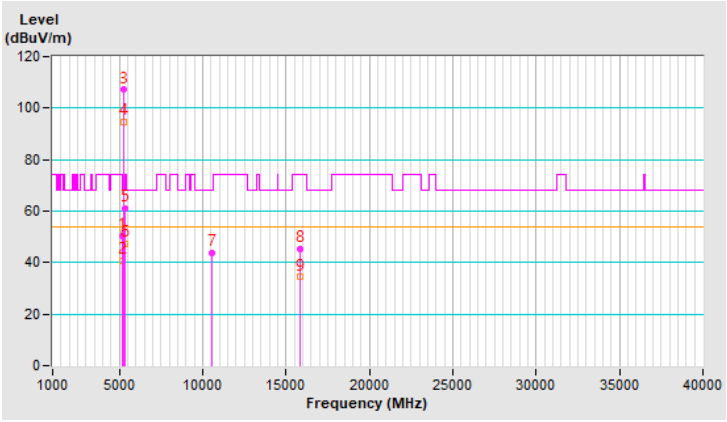


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 62：5.31 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=2kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	71%RH
測 試 日 期 ：	109 年 2 月 28 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5310.00	106.4 PK			2.41 H	52	104.0	2.4
2	*5310.00	94.5 AV			2.41 H	52	92.1	2.4
3	5350.00	69.6 PK	74.0	-4.4	2.41 H	52	67.0	2.6
4	5350.00	53.8 AV	54.0	-0.2	2.41 H	52	51.2	2.6
5	10620.00	43.2 PK	74.0	-30.8	3.60 H	199	30.8	12.4
6	10620.00	30.0 AV	54.0	-24.0	3.60 H	199	17.6	12.4
7	15930.00	45.6 PK	74.0	-28.4	1.61 H	190	33.4	12.2
8	15930.00	34.7 AV	54.0	-19.3	1.61 H	190	22.5	12.2
9	21240.00	-	-	-	-	-	-	-
10	#26550.00	-	-	-	-	-	-	-
11	#31860.00	-	-	-	-	-	-	-
12	#37170.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

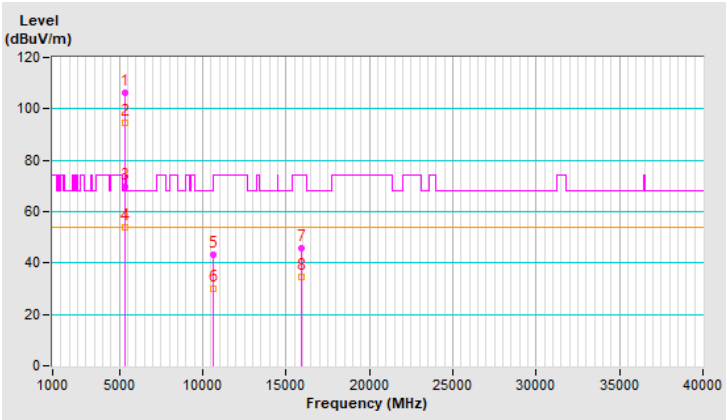


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 62：5.31 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=2kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	71%RH
測 試 日 期 ：	109 年 2 月 28 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5310.00	103.8 PK			3.18 V	50	101.4	2.4
2	*5310.00	91.6 AV			3.18 V	50	89.2	2.4
3	5350.00	62.4 PK	74.0	-11.6	3.18 V	50	59.8	2.6
4	5350.00	48.6 AV	54.0	-5.4	3.18 V	50	46.0	2.6
5	10620.00	44.1 PK	74.0	-29.9	3.08 V	192	31.7	12.4
6	10620.00	31.0 AV	54.0	-23.0	3.08 V	192	18.6	12.4
7	15930.00	45.8 PK	74.0	-28.2	3.54 V	161	33.6	12.2
8	15930.00	34.3 AV	54.0	-19.7	3.54 V	161	22.1	12.2
9	21240.00	-	-	-	-	-	-	-
10	#26550.00	-	-	-	-	-	-	-
11	#31860.00	-	-	-	-	-	-	-
12	#37170.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

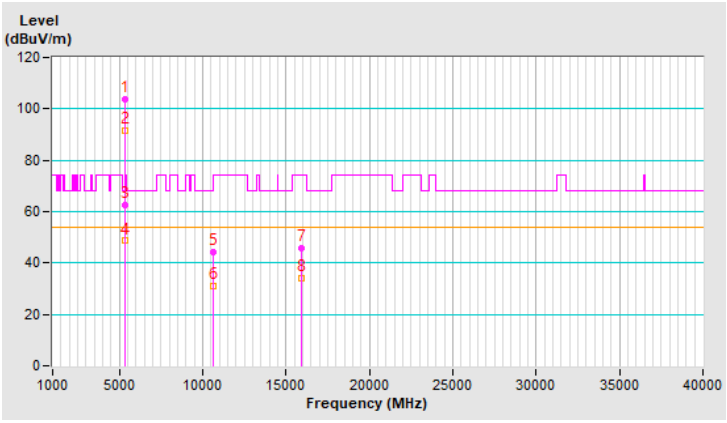


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 102 : 5.51 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=2kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	71%RH
測 試 日 期 ：	109 年 2 月 28 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	61.0 PK	74.0	-13.0	2.02 H	50	58.0	3.0
2	5460.00	44.6 AV	54.0	-9.4	2.02 H	50	41.6	3.0
3	#5470.00	67.8 PK	68.2	-0.4	2.02 H	50	64.7	3.1
4	*5510.00	106.9 PK			2.02 H	50	103.8	3.1
5	*5510.00	94.1 AV			2.02 H	50	91.0	3.1
6	11020.00	42.7 PK	74.0	-31.3	3.62 H	207	30.2	12.5
7	11020.00	29.8 AV	54.0	-24.2	3.62 H	207	17.3	12.5
8	#16530.00	46.1 PK	68.2	-22.1	1.60 H	181	32.2	13.9
9	22040.00	-	-	-	-	-	-	-
10	#27550.00	-	-	-	-	-	-	-
11	#33060.00	-	-	-	-	-	-	-
12	#38570.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

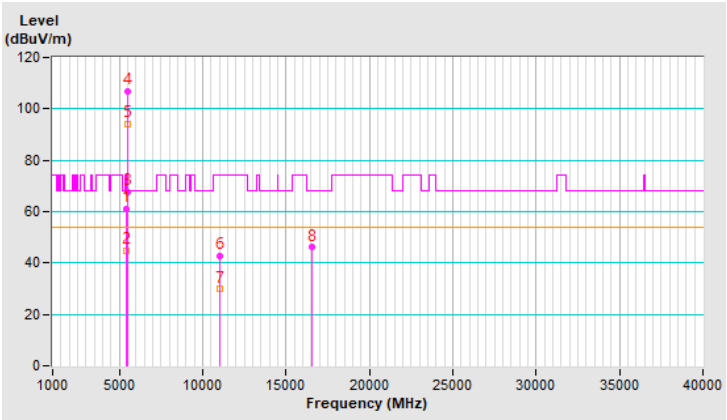


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 102：5.51 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=2kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	71%RH
測 試 日 期 ：	109 年 2 月 28 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	57.8 PK	74.0	-16.2	3.18 V	51	54.8	3.0
2	5460.00	42.1 AV	54.0	-11.9	3.18 V	51	39.1	3.0
3	#5470.00	64.2 PK	68.2	-4.0	3.18 V	51	61.1	3.1
4	*5510.00	103.6 PK			3.18 V	51	100.5	3.1
5	*5510.00	91.2 AV			3.18 V	51	88.1	3.1
6	11020.00	44.4 PK	74.0	-29.6	3.17 V	198	31.9	12.5
7	11020.00	31.0 AV	54.0	-23.0	3.17 V	198	18.5	12.5
8	#16530.00	46.2 PK	68.2	-22.0	3.49 V	152	32.3	13.9
9	22040.00	-	-	-	-	-	-	-
10	#27550.00	-	-	-	-	-	-	-
11	#33060.00	-	-	-	-	-	-	-
12	#38570.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

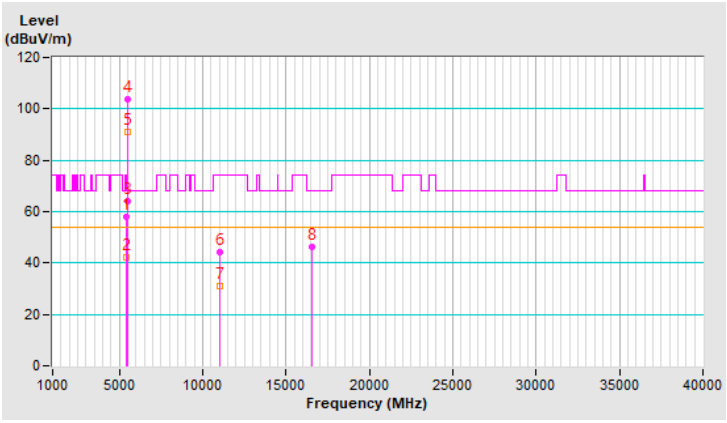


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 110：5.55 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=2kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	71%RH
測 試 日 期 ：	109 年 2 月 28 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	58.8 PK	74.0	-15.2	1.97 H	46	55.8	3.0
2	5460.00	43.6 AV	54.0	-10.4	1.97 H	46	40.6	3.0
3	#5470.00	62.3 PK	68.2	-5.9	1.97 H	46	59.2	3.1
4	*5550.00	110.7 PK			1.97 H	46	107.7	3.0
5	*5550.00	98.3 AV			1.97 H	46	95.3	3.0
6	11100.00	42.6 PK	74.0	-31.4	3.57 H	198	30.3	12.3
7	11100.00	29.7 AV	54.0	-24.3	3.57 H	198	17.4	12.3
8	#16650.00	46.1 PK	68.2	-22.1	1.58 H	187	31.5	14.6
9	22200.00	-	-	-	-	-	-	-
10	#27750.00	-	-	-	-	-	-	-
11	#33300.00	-	-	-	-	-	-	-
12	38850.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

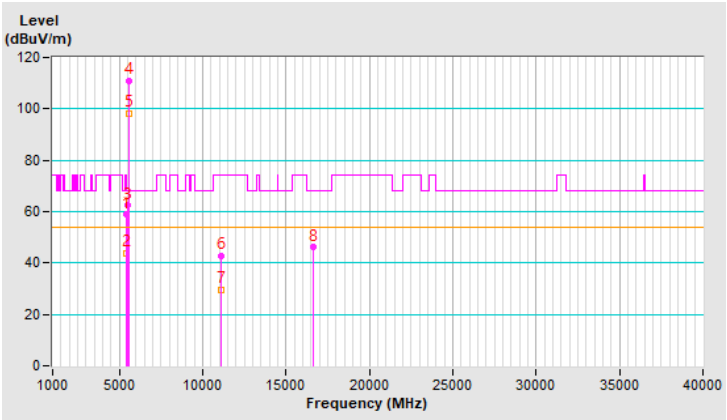


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 110：5.55 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=2kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	71%RH
測 試 日 期 ：	109 年 2 月 28 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	57.4 PK	74.0	-16.6	3.22 V	27	54.4	3.0
2	5460.00	42.5 AV	54.0	-11.5	3.22 V	27	39.5	3.0
3	#5470.00	58.9 PK	68.2	-9.3	3.22 V	27	55.8	3.1
4	*5550.00	107.2 PK			3.22 V	27	104.2	3.0
5	*5550.00	94.8 AV			3.22 V	27	91.8	3.0
6	11100.00	43.3 PK	74.0	-30.7	3.14 V	196	31.0	12.3
7	11100.00	30.5 AV	54.0	-23.5	3.14 V	196	18.2	12.3
8	#16650.00	45.0 PK	68.2	-23.2	3.50 V	140	30.4	14.6
9	22200.00	-	-	-	-	-	-	-
10	#27750.00	-	-	-	-	-	-	-
11	#33300.00	-	-	-	-	-	-	-
12	38850.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

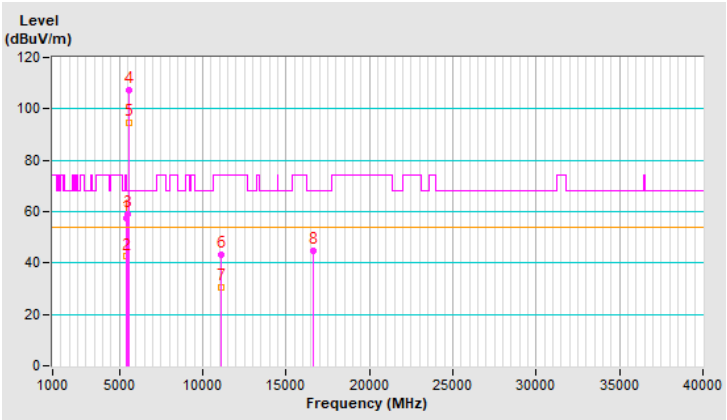


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 134：5.67 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=2kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	71%RH
測 試 日 期 ：	109 年 2 月 28 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5670.00	108.6 PK			2.69 H	57	105.4	3.2
2	*5670.00	96.4 AV			2.69 H	57	93.2	3.2
3	#5725.00	67.8 PK	68.2	-0.4	2.69 H	57	64.5	3.3
4	11340.00	42.6 PK	74.0	-31.4	3.59 H	213	29.7	12.9
5	11340.00	29.9 AV	54.0	-24.1	3.59 H	213	17.0	12.9
6	#17010.00	45.8 PK	68.2	-22.4	1.52 H	164	29.9	15.9
7	22680.00	-	-	-	-	-	-	-
8	#28350.00	-	-	-	-	-	-	-
9	#34020.00	-	-	-	-	-	-	-
10	39690.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

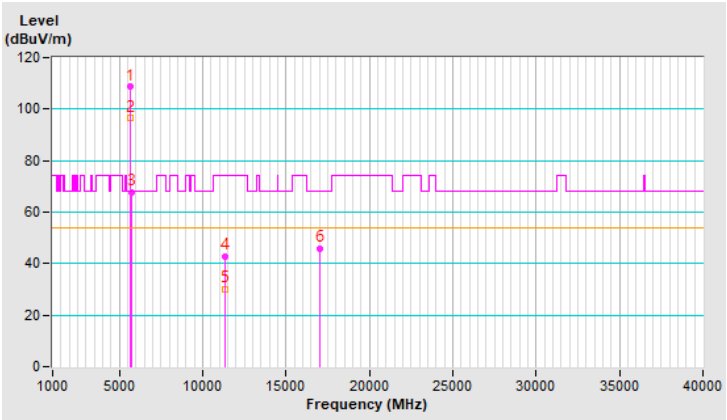


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 134：5.67 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=2kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	71%RH
測 試 日 期 ：	109 年 2 月 28 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5670.00	106.9 PK			3.19 V	26	103.7	3.2
2	*5670.00	94.4 AV			3.19 V	26	91.2	3.2
3	#5725.00	65.3 PK	68.2	-2.9	3.19 V	26	62.0	3.3
4	11340.00	44.1 PK	74.0	-29.9	3.15 V	186	31.2	12.9
5	11340.00	30.9 AV	54.0	-23.1	3.15 V	186	18.0	12.9
6	#17010.00	45.9 PK	68.2	-22.3	3.53 V	163	30.0	15.9
7	22680.00	-	-	-	-	-	-	-
8	#28350.00	-	-	-	-	-	-	-
9	#34020.00	-	-	-	-	-	-	-
10	39690.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

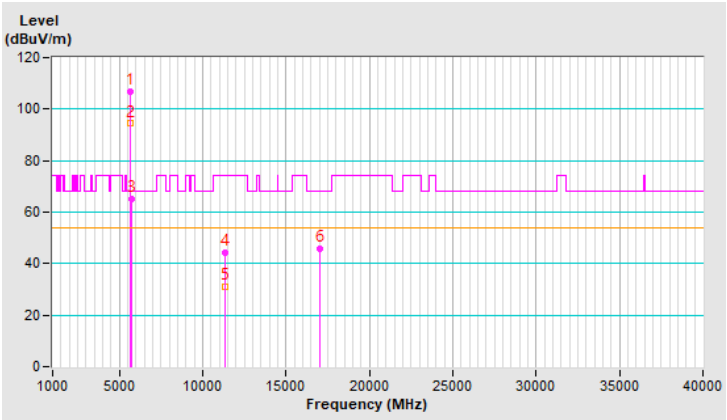


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 142 : 5.71 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=2kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	71%RH
測 試 日 期 ：	109 年 2 月 28 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	49.5 PK	74.0	-24.5	1.53 H	58	46.5	3.0
2	5460.00	37.3 AV	54.0	-16.7	1.53 H	58	34.3	3.0
3	#5470.00	49.1 PK	68.2	-19.1	1.53 H	58	46.0	3.1
4	*5710.00	110.3 PK			1.53 H	58	107.1	3.2
5	*5710.00	98.0 AV			1.53 H	58	94.8	3.2
6	#5850.00	52.2 PK	68.2	-16.0	1.53 H	58	48.5	3.7
7	11420.00	42.0 PK	74.0	-32.0	3.60 H	196	29.1	12.9
8	11420.00	29.3 AV	54.0	-24.7	3.60 H	196	16.4	12.9
9	#17130.00	45.8 PK	68.2	-22.4	1.61 H	191	29.4	16.4
10	22840.00	-	-	-	-	-	-	-
11	#28550.00	-	-	-	-	-	-	-
12	#34260.00	-	-	-	-	-	-	-
13	39970.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

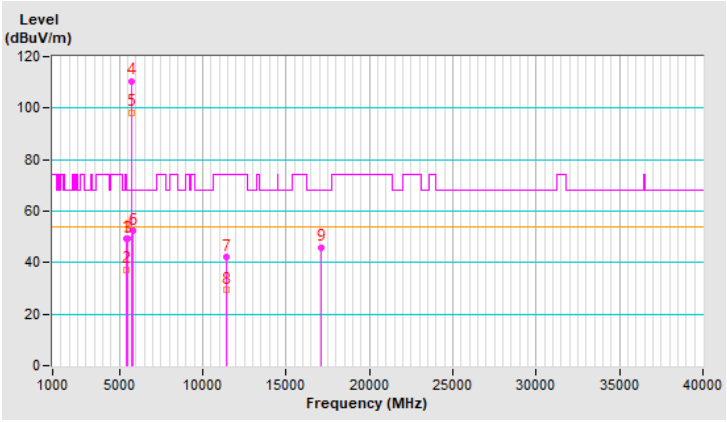


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 142 : 5.71 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=2kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	71%RH
測 試 日 期 ：	109 年 2 月 28 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	46.7 PK	74.0	-27.3	3.17 V	34	43.7	3.0
2	5460.00	34.5 AV	54.0	-19.5	3.17 V	34	31.5	3.0
3	#5470.00	47.6 PK	68.2	-20.6	3.17 V	34	44.5	3.1
4	*5710.00	107.1 PK			3.17 V	34	103.9	3.2
5	*5710.00	94.6 AV			3.17 V	34	91.4	3.2
6	#5850.00	50.6 PK	68.2	-17.6	3.17 V	34	46.9	3.7
7	11420.00	43.8 PK	74.0	-30.2	3.12 V	182	30.9	12.9
8	11420.00	30.8 AV	54.0	-23.2	3.12 V	182	17.9	12.9
9	#17130.00	45.6 PK	68.2	-22.6	3.51 V	163	29.2	16.4
10	22840.00	-	-	-	-	-	-	-
11	#28550.00	-	-	-	-	-	-	-
12	#34260.00	-	-	-	-	-	-	-
13	39970.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

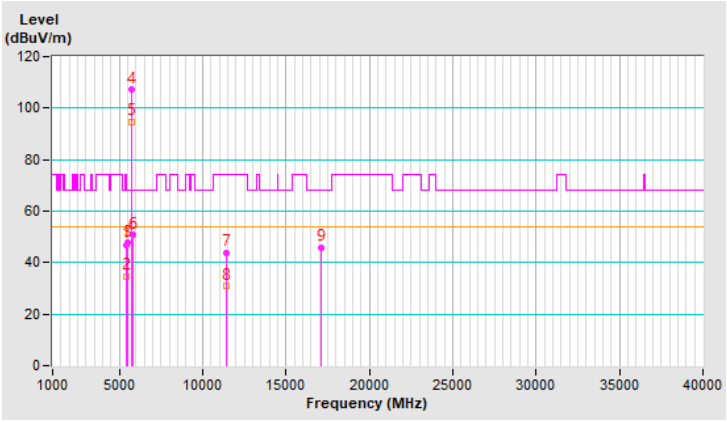


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 151：5.755 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=2kHz
量 測 場 地 溫 度 ：	23℃	量 測 場 地 濕 度 ：	67%RH
測 試 日 期 ：	109 年 1 月 22 日	測 試 者 ：	柯其宗

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5755.00	111.8 PK			1.45 H	44	108.5	3.3
2	*5755.00	99.3 AV			1.45 H	44	96.0	3.3
3	11510.00	46.0 PK	74.0	-28.0	1.37 H	29	33.5	12.5
4	11510.00	34.2 AV	54.0	-19.8	1.37 H	29	21.7	12.5
5	#17265.00	45.9 PK	68.2	-22.3	2.28 H	168	29.3	16.6
6	23020.00	-	-	-	-	-	-	-
7	#28775.00	-	-	-	-	-	-	-
8	#34530.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

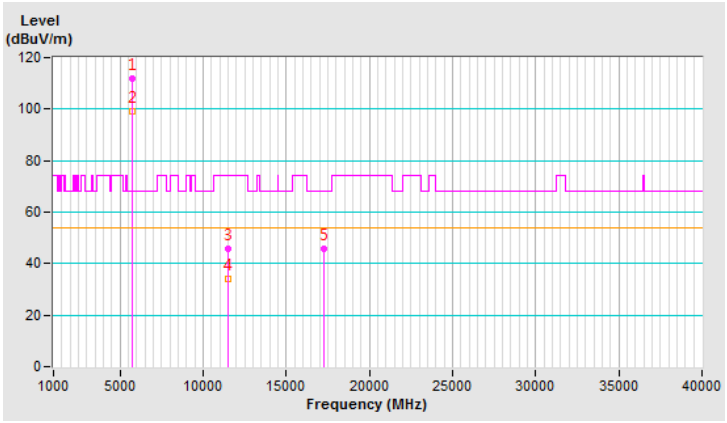


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 151：5.755 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=2kHz
量 測 場 地 溫 度 ：	23℃	量 測 場 地 濕 度 ：	67%RH
測 試 日 期 ：	109 年 1 月 22 日	測 試 者 ：	柯其宗

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5755.00	109.4 PK			3.99 V	349	106.1	3.3
2	*5755.00	97.2 AV			3.99 V	349	93.9	3.3
3	11510.00	45.8 PK	74.0	-28.2	2.64 V	140	33.3	12.5
4	11510.00	33.9 AV	54.0	-20.1	2.64 V	140	21.4	12.5
5	#17265.00	45.4 PK	68.2	-22.8	1.89 V	183	28.8	16.6
6	23020.00	-	-	-	-	-	-	-
7	#28775.00	-	-	-	-	-	-	-
8	#34530.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

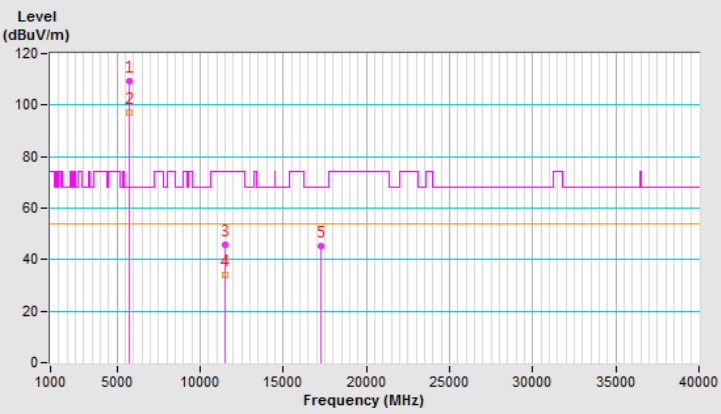


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 159：5.795 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=2kHz
量 測 場 地 溫 度 ：	23℃	量 測 場 地 濕 度 ：	67%RH
測 試 日 期 ：	109 年 1 月 22 日	測 試 者 ：	柯其宗

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5795.00	113.2 PK			1.46 H	42	109.7	3.5
2	*5795.00	99.8 AV			1.46 H	42	96.3	3.5
3	11590.00	46.2 PK	74.0	-27.8	1.37 H	24	33.9	12.3
4	11590.00	34.3 AV	54.0	-19.7	1.37 H	24	22.0	12.3
5	#17385.00	45.9 PK	68.2	-22.3	2.29 H	145	29.4	16.5
6	#23180.00	-	-	-	-	-	-	-
7	#28975.00	-	-	-	-	-	-	-
8	#34770.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

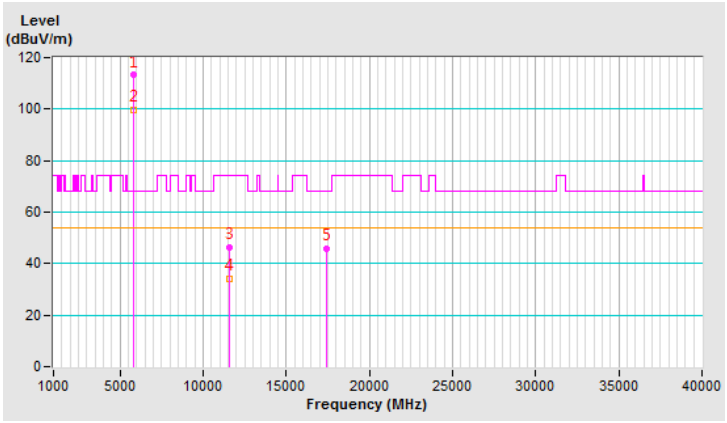


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 159：5.795 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=2kHz
量 測 場 地 溫 度 ：	23℃	量 測 場 地 濕 度 ：	67%RH
測 試 日 期 ：	109 年 1 月 22 日	測 試 者 ：	柯其宗

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5795.00	109.6 PK			3.98 V	352	106.1	3.5
2	*5795.00	97.5 AV			3.98 V	352	94.0	3.5
3	11590.00	45.7 PK	74.0	-28.3	2.61 V	147	33.4	12.3
4	11590.00	34.1 AV	54.0	-19.9	2.61 V	147	21.8	12.3
5	#17385.00	45.3 PK	68.2	-22.9	1.83 V	175	28.8	16.5
6	#23180.00	-	-	-	-	-	-	-
7	#28975.00	-	-	-	-	-	-	-
8	#34770.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

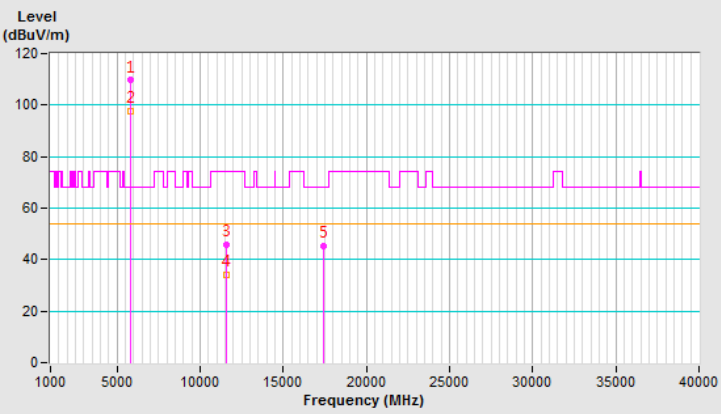


802.11ax (HE80)

操作模式 ：	發射	調變技術 ：	OFDMA
基本波頻率 ：	CH 42：5.21 GHz	測試儀器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=3kHz
量測場地溫度 ：	23℃	量測場地濕度 ：	67%RH
測試日期 ：	109 年 1 月 22 日	測試者 ：	柯其宗

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	70.7 PK	74.0	-3.3	2.52 H	64	67.7	3.0
2	5150.00	53.8 AV	54.0	-0.2	2.52 H	64	50.8	3.0
3	*5210.00	105.1 PK			2.52 H	64	102.4	2.7
4	*5210.00	92.2 AV			2.52 H	64	89.5	2.7
5	5350.00	56.8 PK	74.0	-17.2	2.52 H	64	54.2	2.6
6	5350.00	42.6 AV	54.0	-11.4	2.52 H	64	40.0	2.6
7	#10420.00	45.4 PK	68.2	-22.8	1.44 H	47	33.1	12.3
8	15630.00	46.0 PK	74.0	-28.0	2.24 H	163	33.3	12.7
9	15630.00	34.1 AV	54.0	-19.9	2.24 H	163	21.4	12.7
10	20840.00	-	-	-	-	-	-	-
11	#26050.00	-	-	-	-	-	-	-
12	31260.00	-	-	-	-	-	-	-
13	36470.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

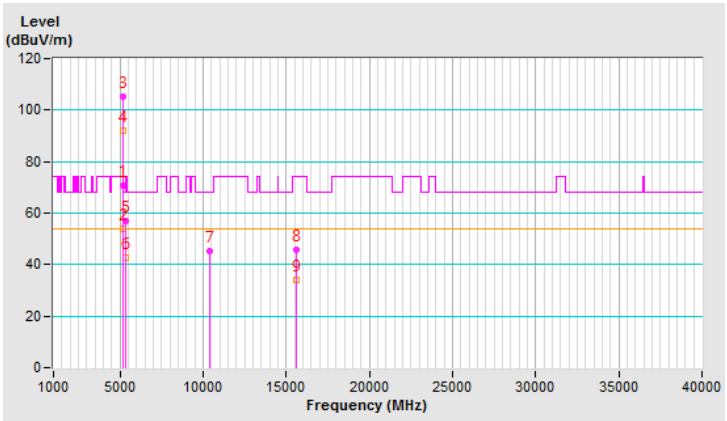


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 42：5.21 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=3kHz
量 測 場 地 溫 度 ：	23℃	量 測 場 地 濕 度 ：	67%RH
測 試 日 期 ：	109 年 1 月 22 日	測 試 者 ：	柯其宗

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	67.5 PK	74.0	-6.5	3.73 V	17	64.5	3.0
2	5150.00	50.9 AV	54.0	-3.1	3.73 V	17	47.9	3.0
3	*5210.00	103.4 PK			3.73 V	17	100.7	2.7
4	*5210.00	90.0 AV			3.73 V	17	87.3	2.7
5	5350.00	55.9 PK	74.0	-18.1	3.73 V	17	53.3	2.6
6	5350.00	42.0 AV	54.0	-12.0	3.73 V	17	39.4	2.6
7	#10420.00	45.5 PK	68.2	-22.7	2.64 V	144	33.2	12.3
8	15630.00	45.2 PK	74.0	-28.8	1.90 V	170	32.5	12.7
9	15630.00	33.6 AV	54.0	-20.4	1.90 V	170	20.9	12.7
10	20840.00	-	-	-	-	-	-	-
11	#26050.00	-	-	-	-	-	-	-
12	31260.00	-	-	-	-	-	-	-
13	36470.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

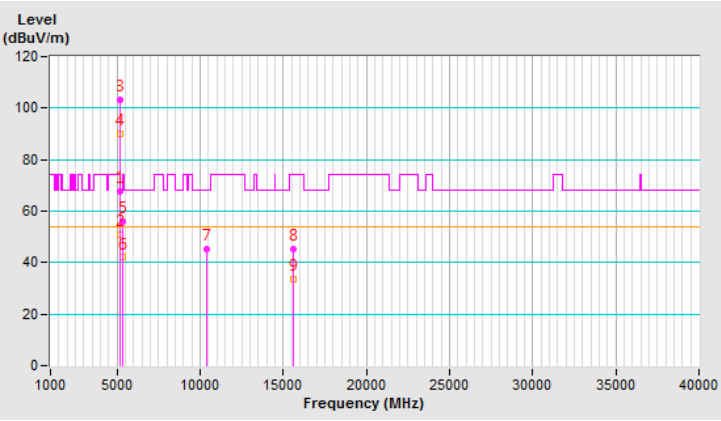


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 58：5.29 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=3kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	71%RH
測 試 日 期 ：	109 年 2 月 28 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	55.3 PK	74.0	-18.7	2.40 H	60	52.3	3.0
2	5150.00	44.1 AV	54.0	-9.9	2.40 H	60	41.1	3.0
3	*5290.00	105.1 PK			2.40 H	60	102.7	2.4
4	*5290.00	92.6 AV			2.40 H	60	90.2	2.4
5	5350.00	72.1 PK	74.0	-1.9	2.40 H	60	69.5	2.6
6	5350.00	53.8 AV	54.0	-0.2	2.40 H	60	51.2	2.6
7	#10580.00	42.8 PK	68.2	-25.4	3.61 H	214	30.3	12.5
8	15870.00	45.7 PK	74.0	-28.3	1.57 H	182	33.8	11.9
9	15870.00	34.4 AV	54.0	-19.6	1.57 H	182	22.5	11.9
10	21160.00	-	-	-	-	-	-	-
11	#26450.00	-	-	-	-	-	-	-
12	31740.00	-	-	-	-	-	-	-
13	#37030.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

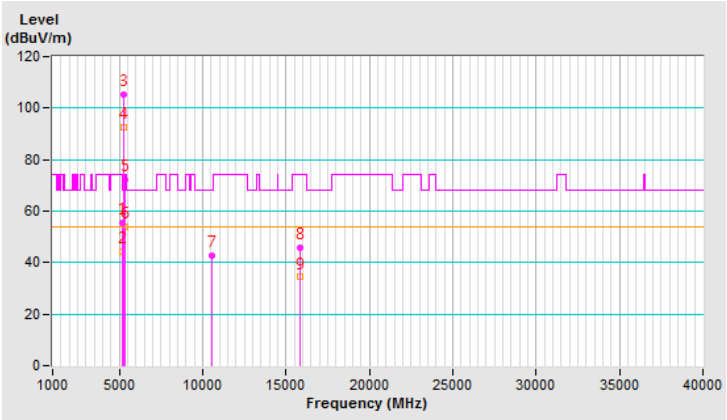


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 58：5.29 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=3kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	71%RH
測 試 日 期 ：	109 年 2 月 28 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	51.8 PK	74.0	-22.2	3.15 V	50	48.8	3.0
2	5150.00	41.5 AV	54.0	-12.5	3.15 V	50	38.5	3.0
3	*5290.00	102.8 PK			3.15 V	50	100.4	2.4
4	*5290.00	89.4 AV			3.15 V	50	87.0	2.4
5	5350.00	67.2 PK	74.0	-6.8	3.15 V	50	64.6	2.6
6	5350.00	50.2 AV	54.0	-3.8	3.15 V	50	47.6	2.6
7	#10580.00	44.0 PK	68.2	-24.2	3.09 V	177	31.5	12.5
8	15870.00	45.9 PK	74.0	-28.1	3.52 V	164	34.0	11.9
9	15870.00	33.8 AV	54.0	-20.2	3.52 V	164	21.9	11.9
10	21160.00	-	-	-	-	-	-	-
11	#26450.00	-	-	-	-	-	-	-
12	31740.00	-	-	-	-	-	-	-
13	#37030.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

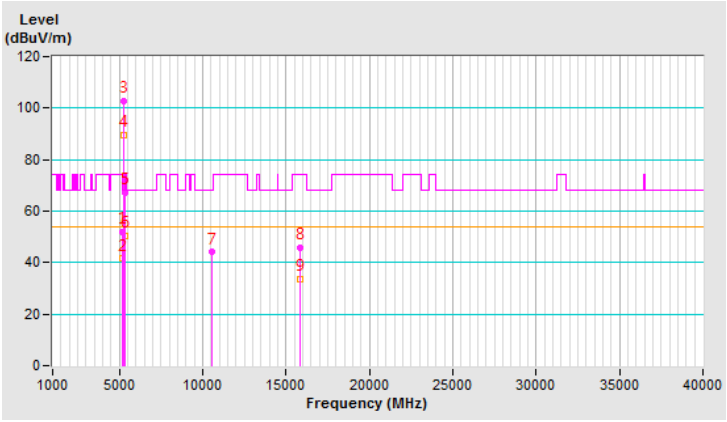


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 106：5.53 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=3kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	71%RH
測 試 日 期 ：	109 年 2 月 28 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	63.9 PK	74.0	-10.1	2.02 H	48	60.9	3.0
2	5460.00	45.9 AV	54.0	-8.1	2.02 H	48	42.9	3.0
3	#5470.00	67.8 PK	68.2	-0.4	2.02 H	48	64.7	3.1
4	*5530.00	103.3 PK			2.02 H	48	100.3	3.0
5	*5530.00	91.0 AV			2.02 H	48	88.0	3.0
6	#5725.00	53.6 PK	68.2	-14.6	2.02 H	48	50.3	3.3
7	11060.00	43.1 PK	74.0	-30.9	3.54 H	197	30.7	12.4
8	11060.00	30.1 AV	54.0	-23.9	3.54 H	197	17.7	12.4
9	#16590.00	45.4 PK	68.2	-22.8	1.58 H	192	31.0	14.4
10	22120.00	-	-	-	-	-	-	-
11	#27650.00	-	-	-	-	-	-	-
12	#33180.00	-	-	-	-	-	-	-
13	38710.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

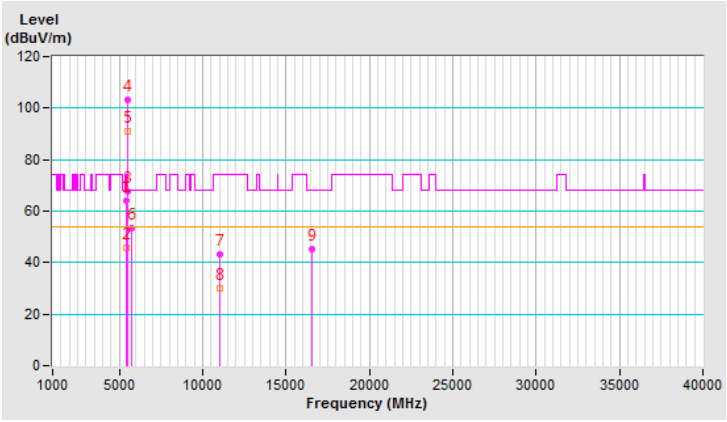


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 106：5.53 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=3kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	71%RH
測 試 日 期 ：	109 年 2 月 28 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	62.4 PK	74.0	-11.6	3.16 V	24	59.4	3.0
2	5460.00	44.7 AV	54.0	-9.3	3.16 V	24	41.7	3.0
3	#5470.00	63.5 PK	68.2	-4.7	3.16 V	24	60.4	3.1
4	*5530.00	99.6 PK			3.16 V	24	96.6	3.0
5	*5530.00	87.4 AV			3.16 V	24	84.4	3.0
6	#5725.00	50.7 PK	68.2	-17.5	3.16 V	24	47.4	3.3
7	11060.00	43.3 PK	74.0	-30.7	3.13 V	199	30.9	12.4
8	11060.00	30.4 AV	54.0	-23.6	3.13 V	199	18.0	12.4
9	#16590.00	45.5 PK	68.2	-22.7	3.44 V	167	31.1	14.4
10	22120.00	-	-	-	-	-	-	-
11	#27650.00	-	-	-	-	-	-	-
12	#33180.00	-	-	-	-	-	-	-
13	38710.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

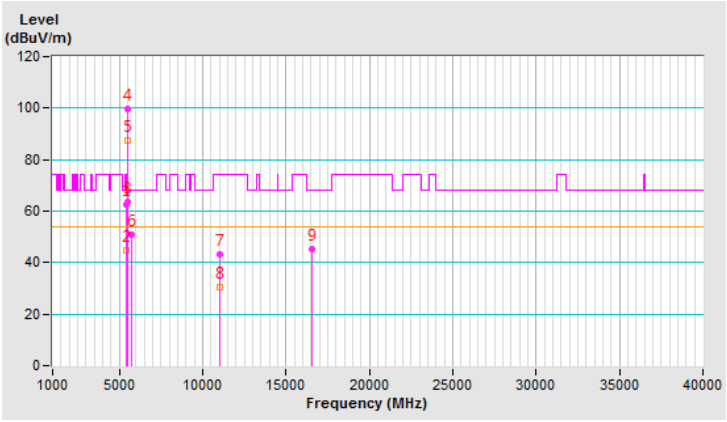


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 122：5.61 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=3kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	71%RH
測 試 日 期 ：	109 年 2 月 28 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5610.00	107.8 PK			1.94 H	53	104.8	3.0
2	*5610.00	95.1 AV			1.94 H	53	92.1	3.0
3	#5725.00	67.9 PK	68.2	-0.3	1.94 H	53	64.6	3.3
4	11220.00	42.8 PK	74.0	-31.2	3.51 H	185	30.3	12.5
5	11220.00	30.0 AV	54.0	-24.0	3.51 H	185	17.5	12.5
6	#16830.00	45.9 PK	68.2	-22.3	1.58 H	193	31.0	14.9
7	22440.00	-	-	-	-	-	-	-
8	#28050.00	-	-	-	-	-	-	-
9	#33660.00	-	-	-	-	-	-	-
10	39270.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

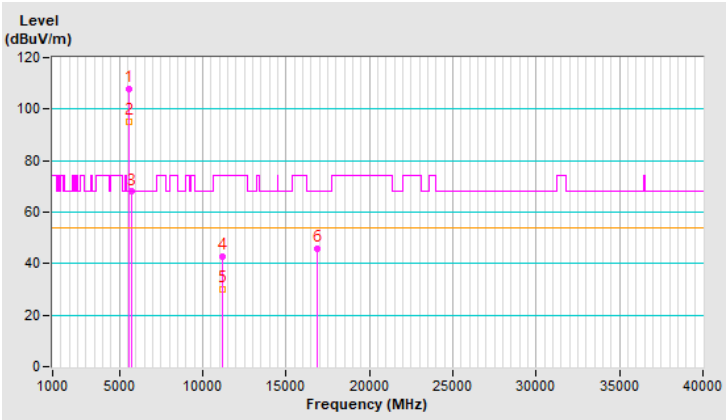


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 122：5.61 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=3kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	71%RH
測 試 日 期 ：	109 年 2 月 28 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5610.00	104.5 PK			3.22 V	50	101.5	3.0
2	*5610.00	91.8 AV			3.22 V	50	88.8	3.0
3	#5725.00	64.4 PK	68.2	-3.8	3.22 V	50	61.1	3.3
4	11220.00	43.6 PK	74.0	-30.4	3.17 V	200	31.1	12.5
5	11220.00	30.6 AV	54.0	-23.4	3.17 V	200	18.1	12.5
6	#16830.00	45.8 PK	68.2	-22.4	3.47 V	144	30.9	14.9
7	22440.00	-	-	-	-	-	-	-
8	#28050.00	-	-	-	-	-	-	-
9	#33660.00	-	-	-	-	-	-	-
10	39270.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

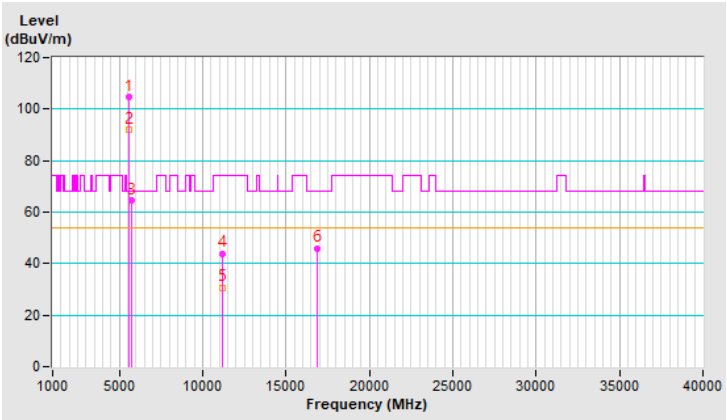


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 138：5.69 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=3kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	71%RH
測 試 日 期 ：	109 年 2 月 28 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	54.2 PK	74.0	-19.8	2.70 H	57	51.2	3.0
2	5460.00	39.5 AV	54.0	-14.5	2.70 H	57	36.5	3.0
3	#5470.00	54.8 PK	68.2	-13.4	2.70 H	57	51.7	3.1
4	*5690.00	109.0 PK			2.70 H	57	105.8	3.2
5	*5690.00	95.6 AV			2.70 H	57	92.4	3.2
6	#5850.00	61.9 PK	68.2	-6.3	2.70 H	57	58.2	3.7
7	11380.00	42.3 PK	74.0	-31.7	3.50 H	203	29.4	12.9
8	11380.00	29.3 AV	54.0	-24.7	3.50 H	203	16.4	12.9
9	#17070.00	45.6 PK	68.2	-22.6	1.55 H	182	29.5	16.1
10	22760.00	-	-	-	-	-	-	-
11	#28450.00	-	-	-	-	-	-	-
12	#34140.00	-	-	-	-	-	-	-
13	39830.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

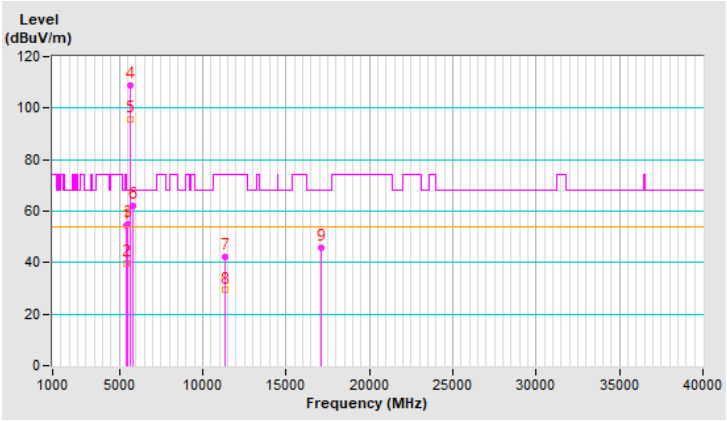


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 138：5.69 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=3kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	71%RH
測 試 日 期 ：	109 年 2 月 28 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	53.4 PK	74.0	-20.6	3.23 V	45	50.4	3.0
2	5460.00	38.5 AV	54.0	-15.5	3.23 V	45	35.5	3.0
3	#5470.00	54.0 PK	68.2	-14.2	3.23 V	45	50.9	3.1
4	*5690.00	104.8 PK			3.23 V	45	101.6	3.2
5	*5690.00	92.1 AV			3.23 V	45	88.9	3.2
6	#5850.00	58.9 PK	68.2	-9.3	3.23 V	45	55.2	3.7
7	11380.00	44.0 PK	74.0	-30.0	3.15 V	176	31.1	12.9
8	11380.00	31.0 AV	54.0	-23.0	3.15 V	176	18.1	12.9
9	#17070.00	45.4 PK	68.2	-22.8	3.53 V	140	29.3	16.1
10	22760.00	-	-	-	-	-	-	-
11	#28450.00	-	-	-	-	-	-	-
12	#34140.00	-	-	-	-	-	-	-
13	39830.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

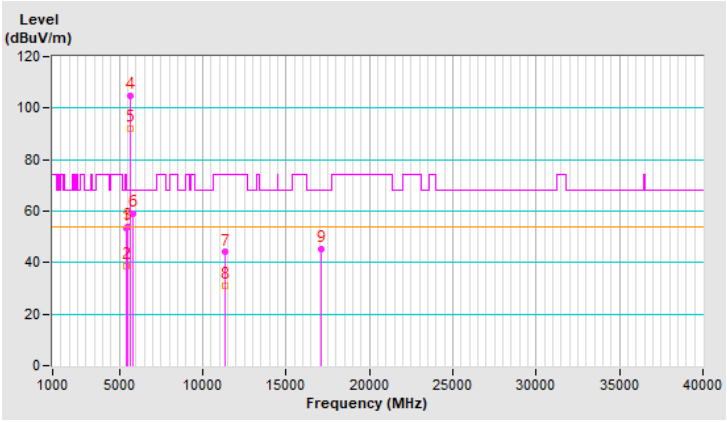


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 155：5.775 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=3kHz
量 測 場 地 溫 度 ：	23℃	量 測 場 地 濕 度 ：	67%RH
測 試 日 期 ：	109 年 1 月 22 日	測 試 者 ：	柯其宗

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5775.00	109.2 PK			1.47 H	42	105.8	3.4
2	*5775.00	97.3 AV			1.47 H	42	93.9	3.4
3	11550.00	45.6 PK	74.0	-28.4	1.33 H	30	33.2	12.4
4	11550.00	33.7 AV	54.0	-20.3	1.33 H	30	21.3	12.4
5	#17325.00	45.3 PK	68.2	-22.9	2.23 H	149	28.6	16.7
6	23100.00	-	-	-	-	-	-	-
7	#28875.00	-	-	-	-	-	-	-
8	#34650.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

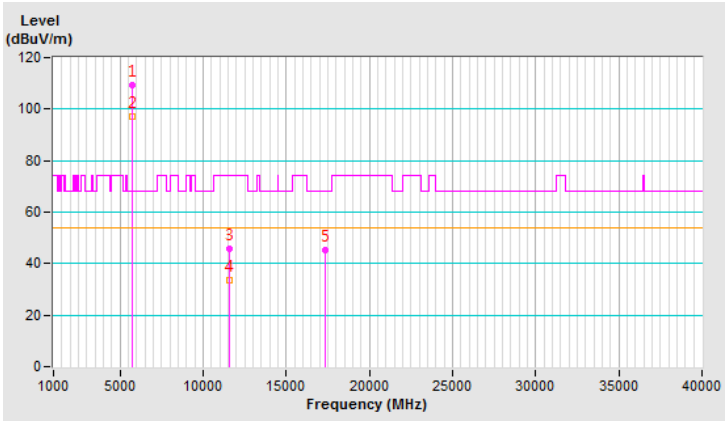


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 155：5.775 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=3kHz
量 測 場 地 溫 度 ：	23℃	量 測 場 地 濕 度 ：	67%RH
測 試 日 期 ：	109 年 1 月 22 日	測 試 者 ：	柯其宗

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5775.00	108.7 PK			3.99 V	351	105.3	3.4
2	*5775.00	95.3 AV			3.99 V	351	91.9	3.4
3	11550.00	45.2 PK	74.0	-28.8	2.67 V	160	32.8	12.4
4	11550.00	33.4 AV	54.0	-20.6	2.67 V	160	21.0	12.4
5	#17325.00	45.1 PK	68.2	-23.1	1.88 V	176	28.4	16.7
6	23100.00	-	-	-	-	-	-	-
7	#28875.00	-	-	-	-	-	-	-
8	#34650.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

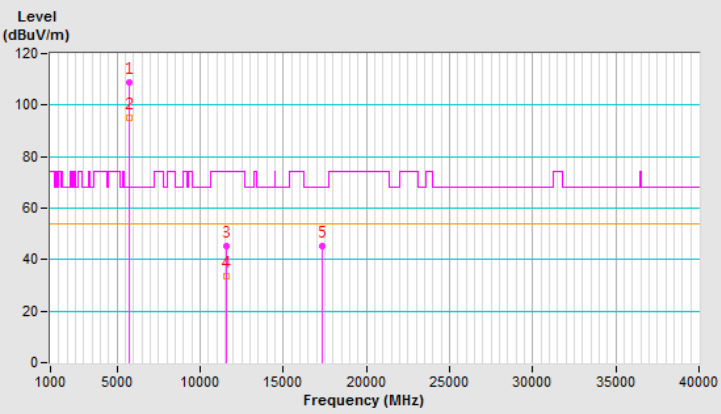

4.11 量測結果 (模式 6)

4.11.1 發射諧波


802.11a

操作模式 :	發射	調變技術 :	OFDM
基本波頻率 :	CH 36：5.18 GHz	測試儀器 :	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=10Hz
量測場地溫度 :	23℃	量測場地濕度 :	67%RH
測試日期 :	109 年 1 月 22 日	測試者 :	柯其宗

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	66.3 PK	74.0	-7.7	2.64 H	156	63.3	3.0
2	5150.00	45.2 AV	54.0	-8.8	2.64 H	156	42.2	3.0
3	*5180.00	100.1 PK			2.64 H	156	97.2	2.9
4	*5180.00	89.9 AV			2.64 H	156	87.0	2.9
5	#10360.00	53.4 PK	68.2	-14.8	1.08 H	150	41.4	12.0
6	15540.00	51.1 PK	74.0	-22.9	2.82 H	58	38.1	13.0
7	15540.00	38.8 AV	54.0	-15.2	2.82 H	58	25.8	13.0
8	20720.00	-	-	-	-	-	-	-
9	#25900.00	-	-	-	-	-	-	-
10	#31080.00	-	-	-	-	-	-	-
11	#36260.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

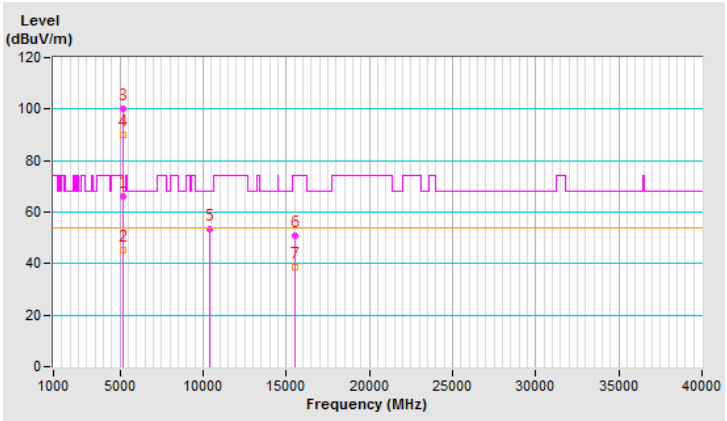


操 作 模 式 ：	發射	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 36：5.18 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=10Hz
量 測 場 地 溫 度 ：	23℃	量 測 場 地 濕 度 ：	67%RH
測 試 日 期 ：	109 年 1 月 22 日	測 試 者 ：	柯其宗

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	73.6 PK	74.0	-0.4	2.55 V	231	70.6	3.0
2	5150.00	51.3 AV	54.0	-2.7	2.55 V	231	48.3	3.0
3	*5180.00	107.5 PK			2.55 V	231	104.6	2.9
4	*5180.00	97.4 AV			2.55 V	231	94.5	2.9
5	#10360.00	54.2 PK	68.2	-14.0	2.11 V	119	42.2	12.0
6	15540.00	54.9 PK	74.0	-19.1	1.07 V	95	41.9	13.0
7	15540.00	40.8 AV	54.0	-13.2	1.07 V	95	27.8	13.0
8	20720.00	-	-	-	-	-	-	-
9	#25900.00	-	-	-	-	-	-	-
10	#31080.00	-	-	-	-	-	-	-
11	#36260.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

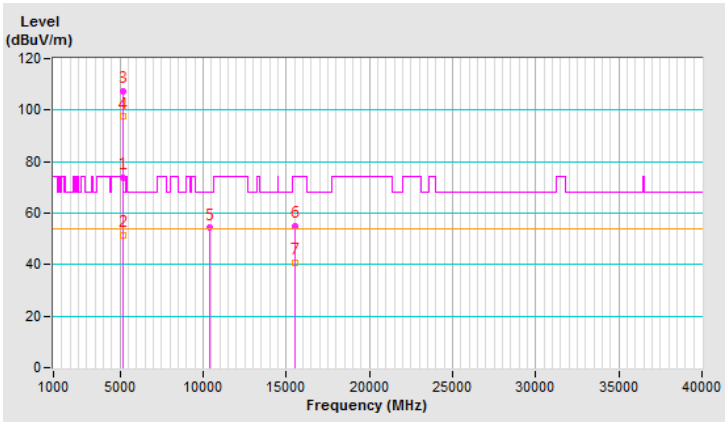


操 作 模 式 ：	發射	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 40：5.2 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=10Hz
量 測 場 地 溫 度 ：	23℃	量 測 場 地 濕 度 ：	67%RH
測 試 日 期 ：	109 年 1 月 22 日	測 試 者 ：	柯其宗

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	66.9 PK	74.0	-7.1	2.62 H	147	63.9	3.0
2	5150.00	45.7 AV	54.0	-8.3	2.62 H	147	42.7	3.0
3	*5200.00	102.4 PK			2.62 H	147	99.6	2.8
4	*5200.00	91.3 AV			2.62 H	147	88.5	2.8
5	5350.00	54.4 PK	74.0	-19.6	2.62 H	147	51.8	2.6
6	5350.00	39.6 AV	54.0	-14.4	2.62 H	147	37.0	2.6
7	#10400.00	53.9 PK	68.2	-14.3	1.09 H	168	41.8	12.1
8	15600.00	51.2 PK	74.0	-22.8	2.80 H	43	38.3	12.9
9	15600.00	38.8 AV	54.0	-15.2	2.80 H	43	25.9	12.9
10	20800.00	-	-	-	-	-	-	-
11	#26000.00	-	-	-	-	-	-	-
12	31200.00	-	-	-	-	-	-	-
13	#36400.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

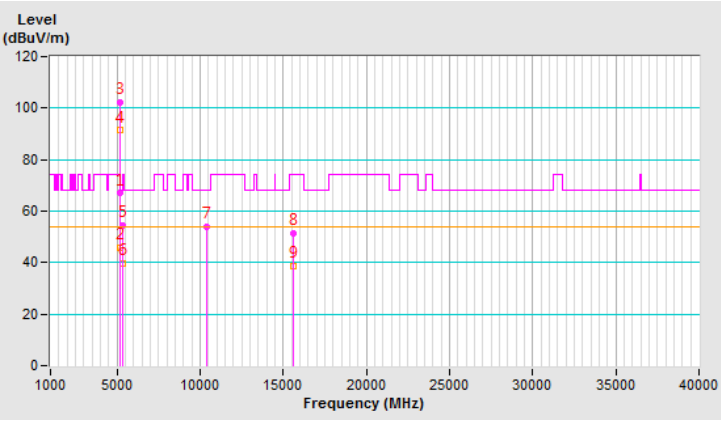


操 作 模 式 ：	發射	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 40：5.2 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=10Hz
量 測 場 地 溫 度 ：	23℃	量 測 場 地 濕 度 ：	67%RH
測 試 日 期 ：	109 年 1 月 22 日	測 試 者 ：	柯其宗

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	68.9 PK	74.0	-5.1	2.53 V	232	65.9	3.0
2	5150.00	52.7 AV	54.0	-1.3	2.53 V	232	49.7	3.0
3	*5200.00	110.1 PK			2.53 V	232	107.3	2.8
4	*5200.00	99.0 AV			2.53 V	232	96.2	2.8
5	5350.00	54.2 PK	74.0	-19.8	2.53 V	232	51.6	2.6
6	5350.00	39.5 AV	54.0	-14.5	2.53 V	232	36.9	2.6
7	#10400.00	54.2 PK	68.2	-14.0	2.09 V	132	42.1	12.1
8	15600.00	54.7 PK	74.0	-19.3	1.11 V	90	41.8	12.9
9	15600.00	42.4 AV	54.0	-11.6	1.11 V	90	29.5	12.9
10	20800.00	-	-	-	-	-	-	-
11	#26000.00	-	-	-	-	-	-	-
12	31200.00	-	-	-	-	-	-	-
13	#36400.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

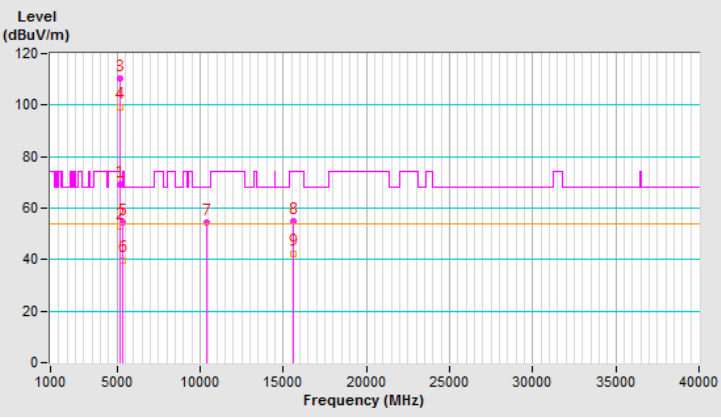


操 作 模 式 ：	發射	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 48：5.24 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=10Hz
量 測 場 地 溫 度 ：	23℃	量 測 場 地 濕 度 ：	67%RH
測 試 日 期 ：	109 年 1 月 22 日	測 試 者 ：	柯其宗

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	52.2 PK	74.0	-21.8	2.62 H	138	49.2	3.0
2	5150.00	38.4 AV	54.0	-15.6	2.62 H	138	35.4	3.0
3	*5240.00	100.1 PK			2.62 H	138	97.5	2.6
4	*5240.00	89.8 AV			2.62 H	138	87.2	2.6
5	5350.00	50.4 PK	74.0	-23.6	2.62 H	138	47.8	2.6
6	5350.00	37.4 AV	54.0	-16.6	2.62 H	138	34.8	2.6
7	#10480.00	53.6 PK	68.2	-14.6	1.09 H	143	41.1	12.5
8	15720.00	50.4 PK	74.0	-23.6	2.81 H	56	38.2	12.2
9	15720.00	38.2 AV	54.0	-15.8	2.81 H	56	26.0	12.2
10	20960.00	-	-	-	-	-	-	-
11	#26200.00	-	-	-	-	-	-	-
12	31440.00	-	-	-	-	-	-	-
13	#36680.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

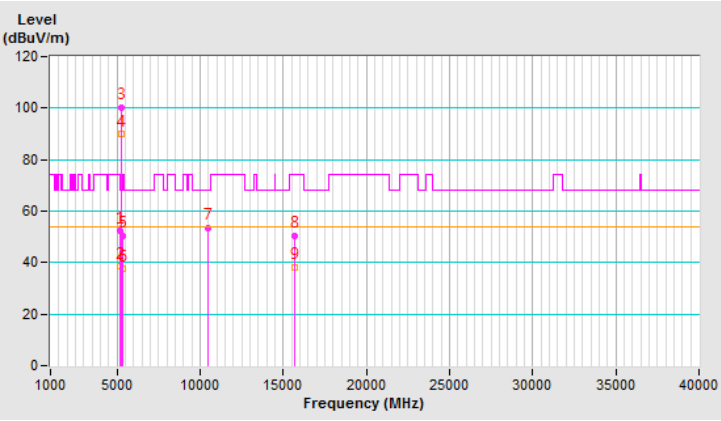


操 作 模 式 ：	發射	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 48：5.24 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=10Hz
量 測 場 地 溫 度 ：	23℃	量 測 場 地 濕 度 ：	67%RH
測 試 日 期 ：	109 年 1 月 22 日	測 試 者 ：	柯其宗

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	52.1 PK	74.0	-21.9	2.56 V	233	49.1	3.0
2	5150.00	38.6 AV	54.0	-15.4	2.56 V	233	35.6	3.0
3	*5240.00	108.5 PK			2.56 V	233	105.9	2.6
4	*5240.00	97.9 AV			2.56 V	233	95.3	2.6
5	5350.00	50.8 PK	74.0	-23.2	2.56 V	233	48.2	2.6
6	5350.00	37.6 AV	54.0	-16.4	2.56 V	233	35.0	2.6
7	#10480.00	54.0 PK	68.2	-14.2	2.04 V	127	41.5	12.5
8	15720.00	54.6 PK	74.0	-19.4	1.14 V	83	42.4	12.2
9	15720.00	40.4 AV	54.0	-13.6	1.14 V	83	28.2	12.2
10	20960.00	-	-	-	-	-	-	-
11	#26200.00	-	-	-	-	-	-	-
12	31440.00	-	-	-	-	-	-	-
13	#36680.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

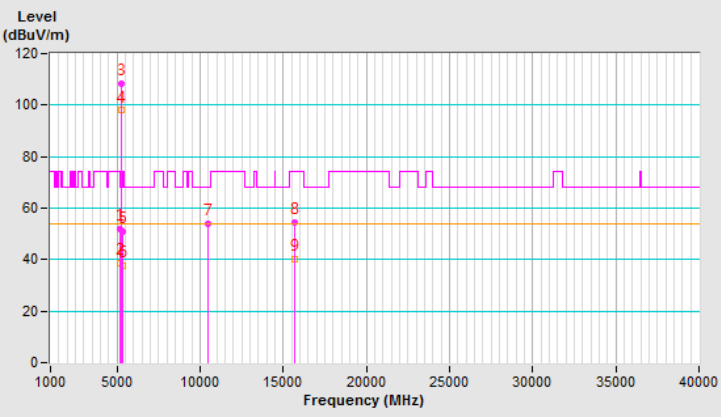


操 作 模 式 ：	發射	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 52：5.26 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=10Hz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	71%RH
測 試 日 期 ：	109 年 2 月 28 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	47.5 PK	74.0	-26.5	2.81 H	145	44.5	3.0
2	5150.00	39.0 AV	54.0	-15.0	2.81 H	145	36.0	3.0
3	*5260.00	93.3 PK			2.81 H	145	90.8	2.5
4	*5260.00	83.7 AV			2.81 H	145	81.2	2.5
5	#10520.00	41.9 PK	68.2	-26.3	3.37 H	187	29.3	12.6
6	15780.00	44.7 PK	74.0	-29.3	1.76 H	174	32.9	11.8
7	15780.00	33.5 AV	54.0	-20.5	1.76 H	174	21.7	11.8
8	21040.00	-	-	-	-	-	-	-
9	#26300.00	-	-	-	-	-	-	-
10	31560.00	-	-	-	-	-	-	-
11	#36820.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

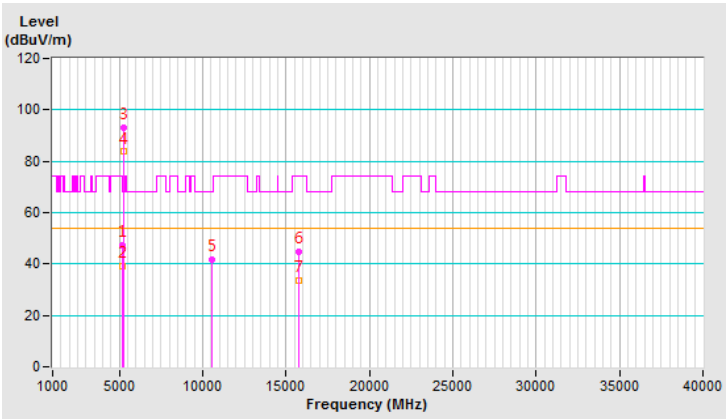


操 作 模 式 ：	發射	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 52：5.26 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=10Hz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	71%RH
測 試 日 期 ：	109 年 2 月 28 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	48.7 PK	74.0	-25.3	3.30 V	236	45.7	3.0
2	5150.00	39.5 AV	54.0	-14.5	3.30 V	236	36.5	3.0
3	*5260.00	104.6 PK			3.30 V	236	102.1	2.5
4	*5260.00	94.6 AV			3.30 V	236	92.1	2.5
5	#10520.00	42.6 PK	68.2	-25.6	2.77 V	190	30.0	12.6
6	15780.00	44.1 PK	74.0	-29.9	3.61 V	169	32.3	11.8
7	15780.00	33.2 AV	54.0	-20.8	3.61 V	169	21.4	11.8
8	21040.00	-	-	-	-	-	-	-
9	#26300.00	-	-	-	-	-	-	-
10	31560.00	-	-	-	-	-	-	-
11	#36820.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

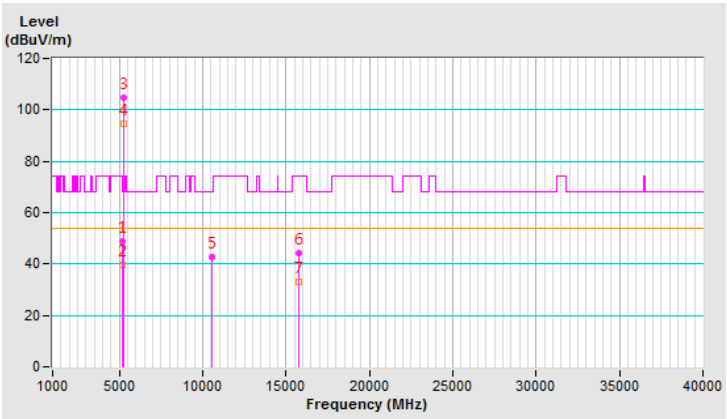


操 作 模 式 ：	發射	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 60：5.3 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=10Hz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	71%RH
測 試 日 期 ：	109 年 2 月 28 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5300.00	94.1 PK			2.80 H	139	91.7	2.4
2	*5300.00	84.3 AV			2.80 H	139	81.9	2.4
3	10600.00	41.6 PK	74.0	-32.4	3.36 H	184	29.2	12.4
4	10600.00	28.4 AV	54.0	-25.6	3.36 H	184	16.0	12.4
5	15900.00	44.7 PK	74.0	-29.3	1.77 H	182	32.6	12.1
6	15900.00	33.5 AV	54.0	-20.5	1.77 H	182	21.4	12.1
7	21200.00	-	-	-	-	-	-	-
8	#26500.00	-	-	-	-	-	-	-
9	31800.00	-	-	-	-	-	-	-
10	#37100.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

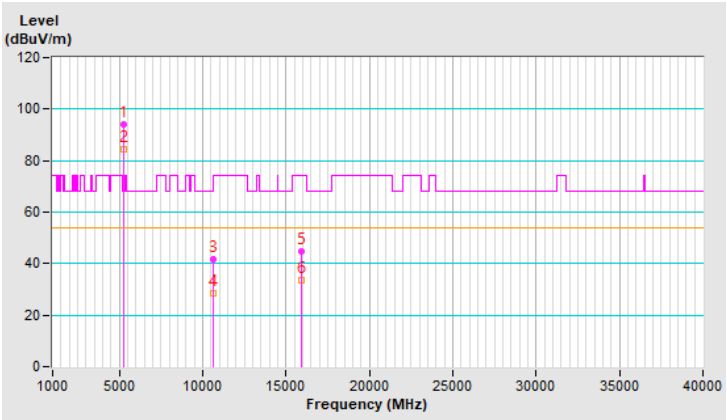


操 作 模 式 ：	發射	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 60：5.3 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=10Hz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	71%RH
測 試 日 期 ：	109 年 2 月 28 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5300.00	104.6 PK			2.85 V	222	102.2	2.4
2	*5300.00	94.7 AV			2.85 V	222	92.3	2.4
3	10600.00	43.0 PK	74.0	-31.0	2.82 V	181	30.6	12.4
4	10600.00	29.8 AV	54.0	-24.2	2.82 V	181	17.4	12.4
5	15900.00	44.6 PK	74.0	-29.4	3.63 V	165	32.5	12.1
6	15900.00	33.6 AV	54.0	-20.4	3.63 V	165	21.5	12.1
7	21200.00	-	-	-	-	-	-	-
8	#26500.00	-	-	-	-	-	-	-
9	31800.00	-	-	-	-	-	-	-
10	#37100.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

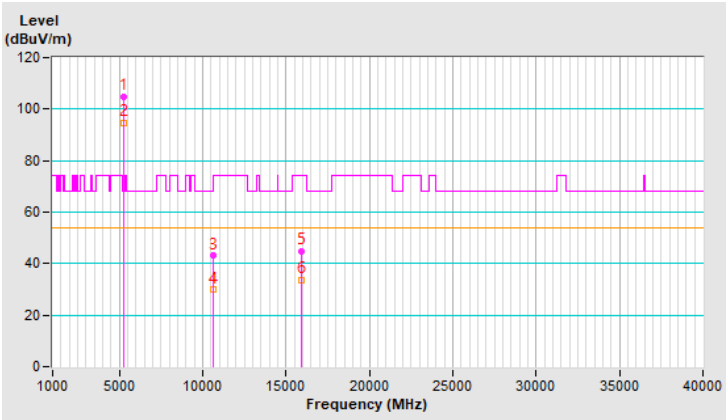


操 作 模 式 ：	發射	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 64：5.32 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=10Hz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	71%RH
測 試 日 期 ：	109 年 2 月 28 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5320.00	93.8 PK			2.81 H	138	91.3	2.5
2	*5320.00	84.1 AV			2.81 H	138	81.6	2.5
3	5350.00	63.6 PK	74.0	-10.4	2.81 H	138	61.0	2.6
4	5350.00	44.1 AV	54.0	-9.9	2.81 H	138	41.5	2.6
5	10640.00	41.5 PK	74.0	-32.5	3.39 H	190	29.1	12.4
6	10640.00	28.8 AV	54.0	-25.2	3.39 H	190	16.4	12.4
7	15960.00	45.2 PK	74.0	-28.8	1.72 H	178	32.8	12.4
8	15960.00	33.8 AV	54.0	-20.2	1.72 H	178	21.4	12.4
9	21280.00	-	-	-	-	-	-	-
10	#26600.00	-	-	-	-	-	-	-
11	#31920.00	-	-	-	-	-	-	-
12	#37240.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

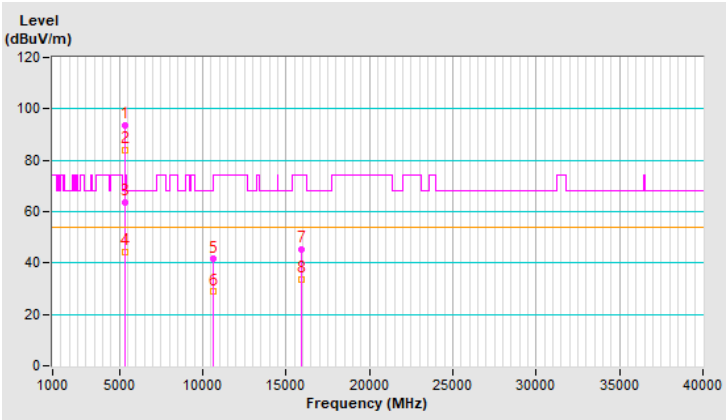


操 作 模 式 ：	發射	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 64：5.32 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=10Hz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	71%RH
測 試 日 期 ：	109 年 2 月 28 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5320.00	105.3 PK			2.86 V	225	102.8	2.5
2	*5320.00	94.3 AV			2.86 V	225	91.8	2.5
3	5350.00	66.1 PK	74.0	-7.9	2.86 V	225	63.5	2.6
4	5350.00	47.3 AV	54.0	-6.7	2.86 V	225	44.7	2.6
5	10640.00	42.7 PK	74.0	-31.3	2.80 V	182	30.3	12.4
6	10640.00	29.5 AV	54.0	-24.5	2.80 V	182	17.1	12.4
7	15960.00	44.0 PK	74.0	-30.0	3.56 V	170	31.6	12.4
8	15960.00	33.1 AV	54.0	-20.9	3.56 V	170	20.7	12.4
9	21280.00	-	-	-	-	-	-	-
10	#26600.00	-	-	-	-	-	-	-
11	#31920.00	-	-	-	-	-	-	-
12	#37240.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

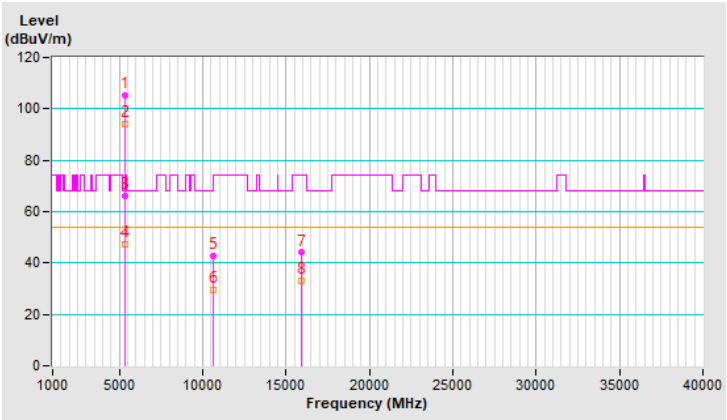


操 作 模 式 ：	發射	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 100：5.5 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=10Hz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	71%RH
測 試 日 期 ：	109 年 2 月 28 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	57.4 PK	74.0	-16.6	2.86 H	151	54.4	3.0
2	5460.00	37.3 AV	54.0	-16.7	2.86 H	151	34.3	3.0
3	#5470.00	60.2 PK	68.2	-8.0	2.86 H	151	57.1	3.1
4	*5500.00	93.7 PK			2.86 H	151	90.6	3.1
5	*5500.00	84.0 AV			2.86 H	151	80.9	3.1
6	11000.00	41.7 PK	74.0	-32.3	3.39 H	188	29.1	12.6
7	11000.00	28.6 AV	54.0	-25.4	3.39 H	188	16.0	12.6
8	#16500.00	44.8 PK	68.2	-23.4	1.70 H	166	31.2	13.6
9	#22000.00	-	-	-	-	-	-	-
10	#27500.00	-	-	-	-	-	-	-
11	#33000.00	-	-	-	-	-	-	-
12	#38500.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

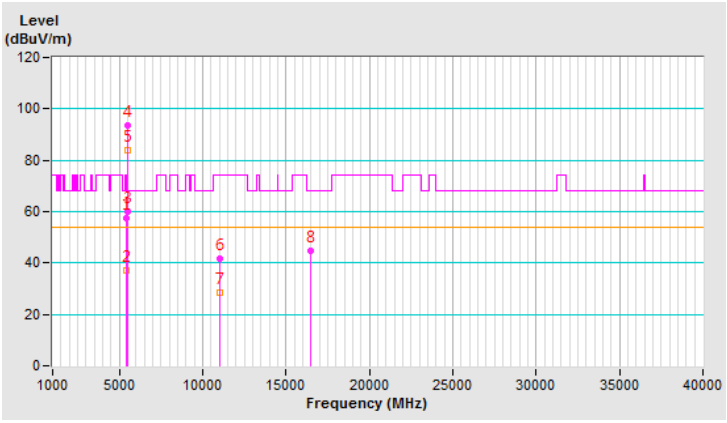


操 作 模 式 ：	發射	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 100：5.5 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=10Hz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	71%RH
測 試 日 期 ：	109 年 2 月 28 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	60.8 PK	74.0	-13.2	2.59 V	196	57.8	3.0
2	5460.00	38.2 AV	54.0	-15.8	2.59 V	196	35.2	3.0
3	#5470.00	63.9 PK	68.2	-4.3	2.59 V	196	60.8	3.1
4	*5500.00	104.2 PK			2.59 V	196	101.1	3.1
5	*5500.00	94.3 AV			2.59 V	196	91.2	3.1
6	11000.00	42.9 PK	74.0	-31.1	2.78 V	188	30.3	12.6
7	11000.00	29.8 AV	54.0	-24.2	2.78 V	188	17.2	12.6
8	#16500.00	43.8 PK	68.2	-24.4	3.58 V	162	30.2	13.6
9	#22000.00	-	-	-	-	-	-	-
10	#27500.00	-	-	-	-	-	-	-
11	#33000.00	-	-	-	-	-	-	-
12	#38500.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

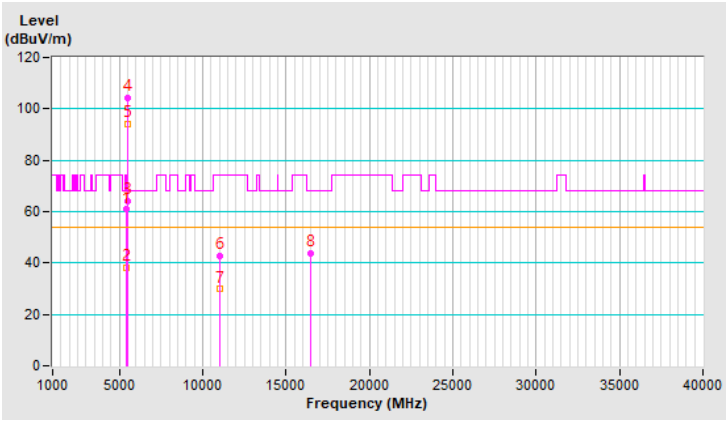


操 作 模 式 ：	發射	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 116：5.58 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=10Hz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	71%RH
測 試 日 期 ：	109 年 2 月 28 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	46.7 PK	74.0	-27.3	2.84 H	137	43.7	3.0
2	5460.00	34.7 AV	54.0	-19.3	2.84 H	137	31.7	3.0
3	#5470.00	47.5 PK	68.2	-20.7	2.84 H	137	44.4	3.1
4	*5580.00	93.9 PK			2.84 H	137	90.9	3.0
5	*5580.00	84.2 AV			2.84 H	137	81.2	3.0
6	11160.00	41.8 PK	74.0	-32.2	3.43 H	180	29.4	12.4
7	11160.00	28.7 AV	54.0	-25.3	3.43 H	180	16.3	12.4
8	#16740.00	44.5 PK	68.2	-23.7	1.78 H	182	29.7	14.8
9	22320.00	-	-	-	-	-	-	-
10	#27900.00	-	-	-	-	-	-	-
11	#33480.00	-	-	-	-	-	-	-
12	39060.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

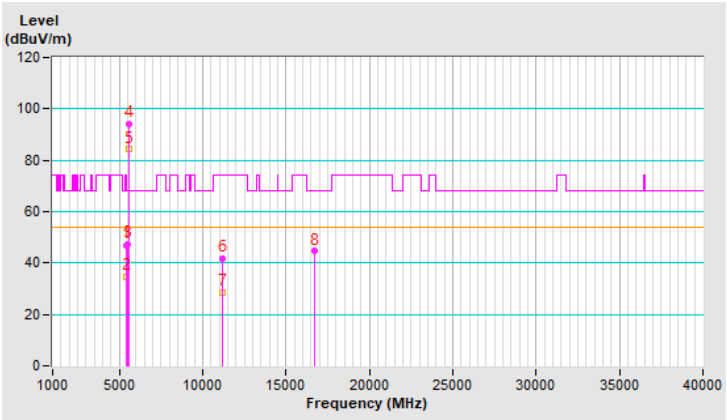


操 作 模 式 ：	發射	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 116：5.58 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=10Hz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	71%RH
測 試 日 期 ：	109 年 2 月 28 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	48.8 PK	74.0	-25.2	2.83 V	196	45.8	3.0
2	5460.00	36.5 AV	54.0	-17.5	2.83 V	196	33.5	3.0
3	#5470.00	48.4 PK	68.2	-19.8	2.83 V	196	45.3	3.1
4	*5580.00	104.7 PK			2.83 V	196	101.7	3.0
5	*5580.00	94.1 AV			2.83 V	196	91.1	3.0
6	11160.00	42.8 PK	74.0	-31.2	2.76 V	187	30.4	12.4
7	11160.00	29.7 AV	54.0	-24.3	2.76 V	187	17.3	12.4
8	#16740.00	44.2 PK	68.2	-24.0	3.59 V	161	29.4	14.8
9	22320.00	-	-	-	-	-	-	-
10	#27900.00	-	-	-	-	-	-	-
11	#33480.00	-	-	-	-	-	-	-
12	39060.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

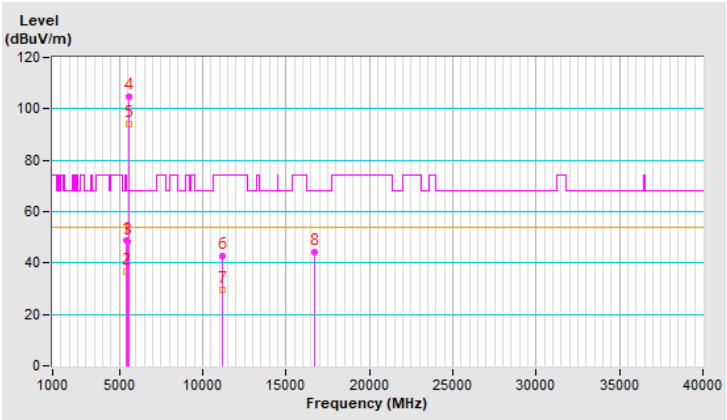


操 作 模 式 ：	發射	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 140：5.7 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=10Hz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	71%RH
測 試 日 期 ：	109 年 2 月 28 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5700.00	93.2 PK			2.81 H	131	90.0	3.2
2	*5700.00	83.8 AV			2.81 H	131	80.6	3.2
3	#5725.00	60.2 PK	68.2	-8.0	2.81 H	131	56.9	3.3
4	11400.00	42.0 PK	74.0	-32.0	3.33 H	198	29.0	13.0
5	11400.00	29.2 AV	54.0	-24.8	3.33 H	198	16.2	13.0
6	#17100.00	44.7 PK	68.2	-23.5	1.70 H	158	28.4	16.3
7	22800.00	-	-	-	-	-	-	-
8	#28500.00	-	-	-	-	-	-	-
9	#34200.00	-	-	-	-	-	-	-
10	39900.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

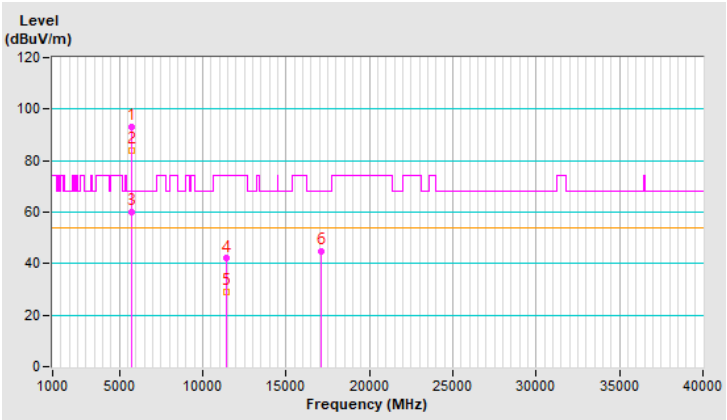


操 作 模 式 ：	發射	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 140：5.7 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=10Hz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	71%RH
測 試 日 期 ：	109 年 2 月 28 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5700.00	104.8 PK			3.30 V	191	101.6	3.2
2	*5700.00	94.5 AV			3.30 V	191	91.3	3.2
3	#5725.00	64.8 PK	68.2	-3.4	3.30 V	191	61.5	3.3
4	11400.00	43.0 PK	74.0	-31.0	2.76 V	186	30.0	13.0
5	11400.00	29.8 AV	54.0	-24.2	2.76 V	186	16.8	13.0
6	#17100.00	43.6 PK	68.2	-24.6	3.58 V	156	27.3	16.3
7	22800.00	-	-	-	-	-	-	-
8	#28500.00	-	-	-	-	-	-	-
9	#34200.00	-	-	-	-	-	-	-
10	39900.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

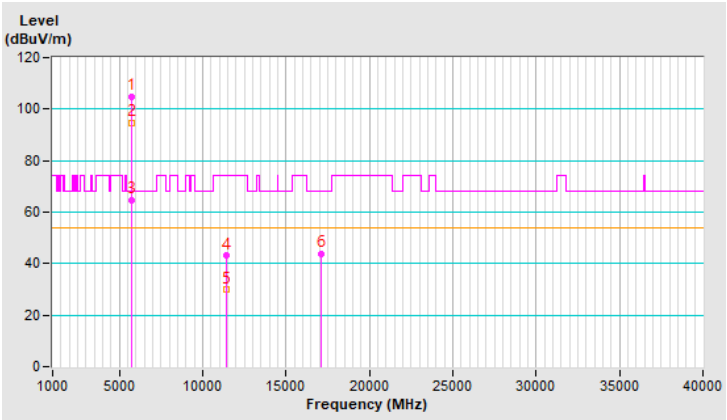


操 作 模 式 ：	發射	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 144：5.72 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=10Hz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	71%RH
測 試 日 期 ：	109 年 2 月 28 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	48.9 PK	74.0	-25.1	2.82 H	142	45.9	3.0
2	5460.00	36.7 AV	54.0	-17.3	2.82 H	142	33.7	3.0
3	#5470.00	49.3 PK	68.2	-18.9	2.82 H	142	46.2	3.1
4	*5720.00	94.0 PK			2.82 H	142	90.8	3.2
5	*5720.00	84.6 AV			2.82 H	142	81.4	3.2
6	#5850.00	51.2 PK	68.2	-17.0	2.82 H	142	47.5	3.7
7	11440.00	41.8 PK	74.0	-32.2	3.37 H	194	29.0	12.8
8	11440.00	28.8 AV	54.0	-25.2	3.37 H	194	16.0	12.8
9	#17160.00	44.9 PK	68.2	-23.3	1.79 H	159	28.3	16.6
10	22880.00	-	-	-	-	-	-	-
11	#28600.00	-	-	-	-	-	-	-
12	#34320.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

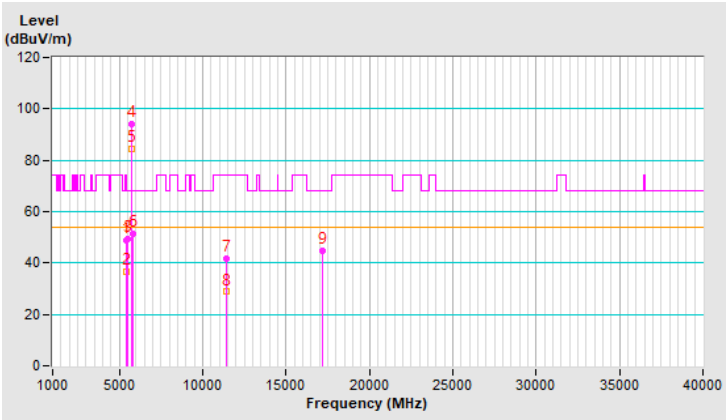


操 作 模 式 ：	發射	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 144：5.72 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=10Hz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	71%RH
測 試 日 期 ：	109 年 2 月 28 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	49.4 PK	74.0	-24.6	3.32 V	190	46.4	3.0
2	5460.00	37.0 AV	54.0	-17.0	3.32 V	190	34.0	3.0
3	#5470.00	49.5 PK	68.2	-18.7	3.32 V	190	46.4	3.1
4	*5720.00	104.1 PK			3.32 V	190	100.9	3.2
5	*5720.00	94.3 AV			3.32 V	190	91.1	3.2
6	#5850.00	51.5 PK	68.2	-16.7	3.32 V	190	47.8	3.7
7	11440.00	42.7 PK	74.0	-31.3	2.74 V	193	29.9	12.8
8	11440.00	29.4 AV	54.0	-24.6	2.74 V	193	16.6	12.8
9	#17160.00	44.3 PK	68.2	-23.9	3.61 V	162	27.7	16.6
10	22880.00	-	-	-	-	-	-	-
11	#28600.00	-	-	-	-	-	-	-
12	#34320.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

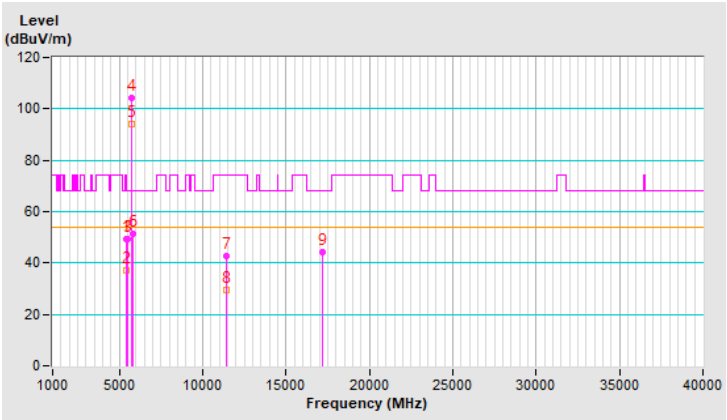


操 作 模 式 ：	發射	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 149：5.745 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=10Hz
量 測 場 地 溫 度 ：	23℃	量 測 場 地 濕 度 ：	67%RH
測 試 日 期 ：	109 年 1 月 22 日	測 試 者 ：	柯其宗

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5745.00	104.2 PK			2.66 H	136	100.9	3.3
2	*5745.00	93.2 AV			2.66 H	136	89.9	3.3
3	11490.00	61.4 PK	74.0	-12.6	1.05 H	155	48.8	12.6
4	11490.00	49.0 AV	54.0	-5.0	1.05 H	155	36.4	12.6
5	#17235.00	50.9 PK	68.2	-17.3	2.82 H	50	34.1	16.8
6	22980.00	-	-	-	-	-	-	-
7	#28725.00	-	-	-	-	-	-	-
8	#34470.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

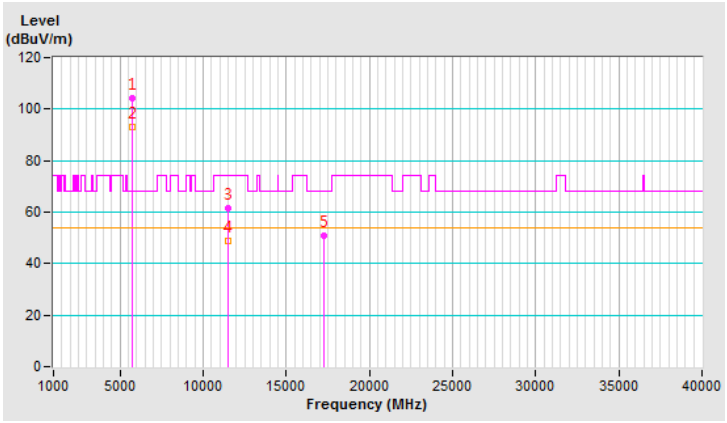


操 作 模 式 ：	發射	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 149：5.745 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=10Hz
量 測 場 地 溫 度 ：	23℃	量 測 場 地 濕 度 ：	67%RH
測 試 日 期 ：	109 年 1 月 22 日	測 試 者 ：	柯其宗

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5745.00	111.8 PK			2.58 V	245	108.5	3.3
2	*5745.00	100.8 AV			2.58 V	245	97.5	3.3
3	11490.00	64.2 PK	74.0	-9.8	1.56 V	14	51.6	12.6
4	11490.00	51.3 AV	54.0	-2.7	1.56 V	14	38.7	12.6
5	#17235.00	52.1 PK	68.2	-16.1	1.99 V	102	35.3	16.8
6	22980.00	-	-	-	-	-	-	-
7	#28725.00	-	-	-	-	-	-	-
8	#34470.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

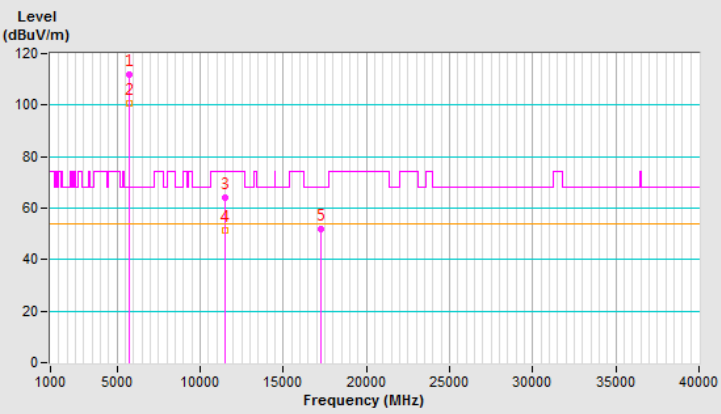


操 作 模 式 ：	發射	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 157：5.785 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=10Hz
量 測 場 地 溫 度 ：	23℃	量 測 場 地 濕 度 ：	67%RH
測 試 日 期 ：	109 年 1 月 22 日	測 試 者 ：	柯其宗

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5785.00	103.3 PK			2.46 H	138	99.9	3.4
2	*5785.00	92.3 AV			2.46 H	138	88.9	3.4
3	11570.00	61.5 PK	74.0	-12.5	1.08 H	165	49.3	12.2
4	11570.00	49.3 AV	54.0	-4.7	1.08 H	165	37.1	12.2
5	#17355.00	51.1 PK	68.2	-17.1	2.87 H	43	34.5	16.6
6	#23140.00	-	-	-	-	-	-	-
7	#28925.00	-	-	-	-	-	-	-
8	#34710.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

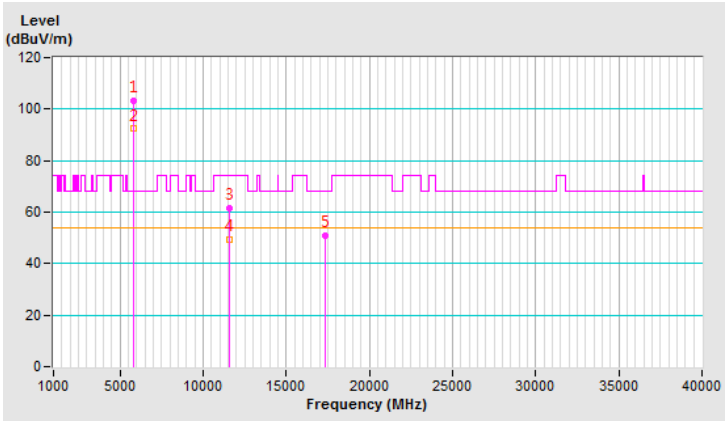


操 作 模 式 ：	發射	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 157：5.785 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=10Hz
量 測 場 地 溫 度 ：	23℃	量 測 場 地 濕 度 ：	67%RH
測 試 日 期 ：	109 年 1 月 22 日	測 試 者 ：	柯其宗

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5785.00	110.9 PK			2.45 V	250	107.5	3.4
2	*5785.00	99.9 AV			2.45 V	250	96.5	3.4
3	11570.00	64.5 PK	74.0	-9.5	1.59 V	18	52.3	12.2
4	11570.00	51.5 AV	54.0	-2.5	1.59 V	18	39.3	12.2
5	#17355.00	52.8 PK	68.2	-15.4	1.98 V	98	36.2	16.6
6	#23140.00	-	-	-	-	-	-	-
7	#28925.00	-	-	-	-	-	-	-
8	#34710.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

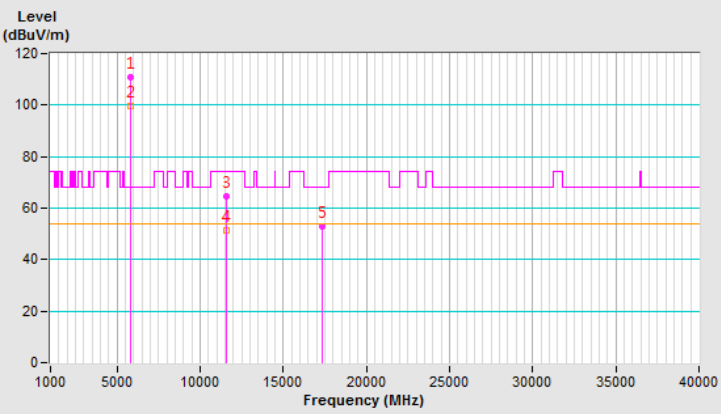


操 作 模 式 ：	發射	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 165：5.825 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=10Hz
量 測 場 地 溫 度 ：	23℃	量 測 場 地 濕 度 ：	67%RH
測 試 日 期 ：	109 年 1 月 22 日	測 試 者 ：	柯其宗

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5825.00	102.9 PK			2.65 H	141	99.3	3.6
2	*5825.00	91.5 AV			2.65 H	141	87.9	3.6
3	11650.00	61.1 PK	74.0	-12.9	1.02 H	162	48.7	12.4
4	11650.00	48.9 AV	54.0	-5.1	1.02 H	162	36.5	12.4
5	#17475.00	51.2 PK	68.2	-17.0	2.82 H	35	34.2	17.0
6	#23300.00	-	-	-	-	-	-	-
7	#29125.00	-	-	-	-	-	-	-
8	#34950.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

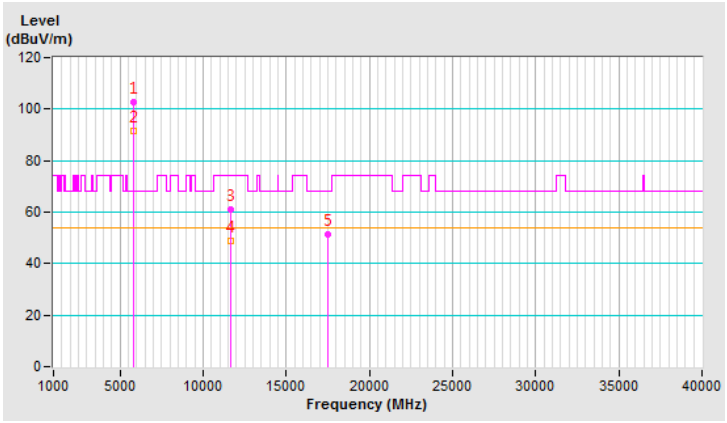


操 作 模 式 ：	發射	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 165：5.825 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=10Hz
量 測 場 地 溫 度 ：	23℃	量 測 場 地 濕 度 ：	67%RH
測 試 日 期 ：	109 年 1 月 22 日	測 試 者 ：	柯其宗

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5825.00	110.8 PK			2.46 V	255	107.2	3.6
2	*5825.00	99.9 AV			2.46 V	255	96.3	3.6
3	11650.00	64.4 PK	74.0	-9.6	1.61 V	6	52.0	12.4
4	11650.00	51.5 AV	54.0	-2.5	1.61 V	6	39.1	12.4
5	#17475.00	52.4 PK	68.2	-15.8	2.01 V	110	35.4	17.0
6	#23300.00	-	-	-	-	-	-	-
7	#29125.00	-	-	-	-	-	-	-
8	#34950.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

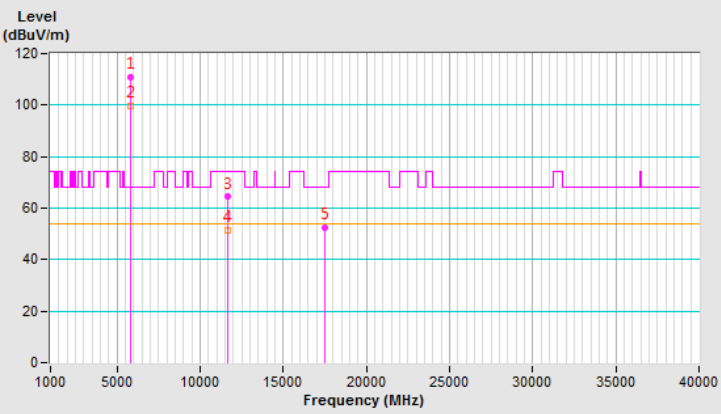


802.11ax (HE20)

操作模式：	發射	調變技術：	OFDMA
基本波頻率：	CH 36：5.18 GHz	測試儀器：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量測場地溫度：	23℃	量測場地濕度：	67%RH
測試日期：	109 年 1 月 22 日	測試者：	柯其宗

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	63.4 PK	74.0	-10.6	2.60 H	163	60.4	3.0
2	5150.00	45.4 AV	54.0	-8.6	2.60 H	163	42.4	3.0
3	*5180.00	99.9 PK			2.60 H	163	97.0	2.9
4	*5180.00	89.5 AV			2.60 H	163	86.6	2.9
5	#10360.00	53.6 PK	68.2	-14.6	1.02 H	139	41.6	12.0
6	15540.00	51.3 PK	74.0	-22.7	2.79 H	71	38.3	13.0
7	15540.00	39.3 AV	54.0	-14.7	2.79 H	71	26.3	13.0
8	20720.00	-	-	-	-	-	-	-
9	#25900.00	-	-	-	-	-	-	-
10	#31080.00	-	-	-	-	-	-	-
11	#36260.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

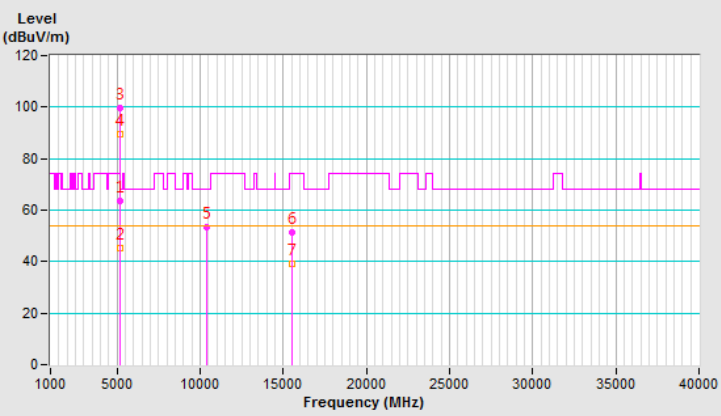


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 36：5.18 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	23℃	量 測 場 地 濕 度 ：	67%RH
測 試 日 期 ：	109 年 1 月 22 日	測 試 者 ：	柯其宗

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	70.4 PK	74.0	-3.6	3.02 V	234	67.4	3.0
2	5150.00	53.7 AV	54.0	-0.3	3.02 V	234	50.7	3.0
3	*5180.00	108.7 PK			3.02 V	234	105.8	2.9
4	*5180.00	97.1 AV			3.02 V	234	94.2	2.9
5	#10360.00	52.0 PK	68.2	-16.2	2.14 V	107	40.0	12.0
6	15540.00	52.9 PK	74.0	-21.1	1.12 V	82	39.9	13.0
7	15540.00	38.9 AV	54.0	-15.1	1.12 V	82	25.9	13.0
8	20720.00	-	-	-	-	-	-	-
9	#25900.00	-	-	-	-	-	-	-
10	#31080.00	-	-	-	-	-	-	-
11	#36260.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

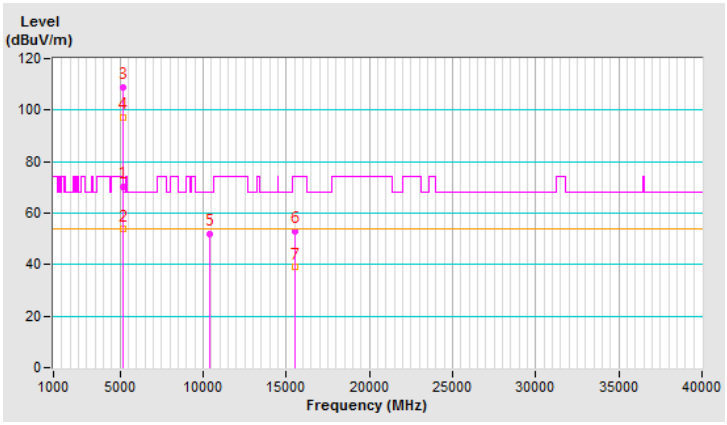


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 40：5.2 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	23℃	量 測 場 地 濕 度 ：	67%RH
測 試 日 期 ：	109 年 1 月 22 日	測 試 者 ：	柯其宗

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	62.4 PK	74.0	-11.6	2.64 H	151	59.4	3.0
2	5150.00	44.6 AV	54.0	-9.4	2.64 H	151	41.6	3.0
3	*5200.00	101.2 PK			2.64 H	151	98.4	2.8
4	*5200.00	91.2 AV			2.64 H	151	88.4	2.8
5	#10400.00	54.2 PK	68.2	-14.0	1.09 H	155	42.1	12.1
6	15600.00	50.0 PK	74.0	-24.0	2.84 H	44	37.1	12.9
7	15600.00	37.9 AV	54.0	-16.1	2.84 H	44	25.0	12.9
8	20800.00	-	-	-	-	-	-	-
9	#26000.00	-	-	-	-	-	-	-
10	31200.00	-	-	-	-	-	-	-
11	#36400.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

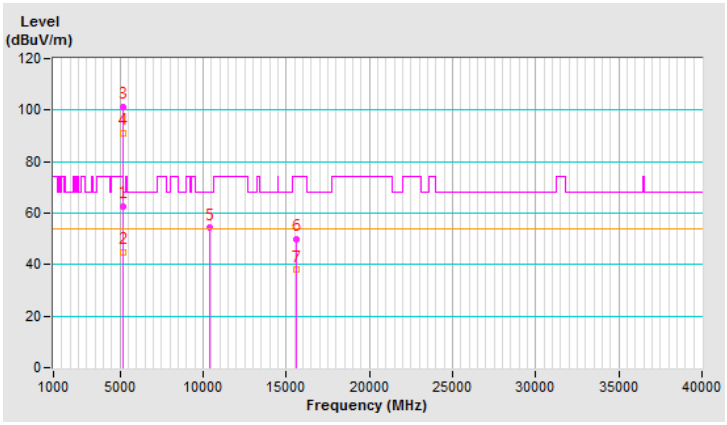


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 40：5.2 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	23℃	量 測 場 地 濕 度 ：	67%RH
測 試 日 期 ：	109 年 1 月 22 日	測 試 者 ：	柯其宗

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	69.8 PK	74.0	-4.2	2.67 V	231	66.8	3.0
2	5150.00	53.7 AV	54.0	-0.3	2.67 V	231	50.7	3.0
3	*5200.00	111.3 PK			2.67 V	231	108.5	2.8
4	*5200.00	98.8 AV			2.67 V	231	96.0	2.8
5	#10400.00	54.5 PK	68.2	-13.7	2.12 V	114	42.4	12.1
6	15600.00	55.7 PK	74.0	-18.3	1.01 V	91	42.8	12.9
7	15600.00	41.3 AV	54.0	-12.7	1.01 V	91	28.4	12.9
8	20800.00	-	-	-	-	-	-	-
9	#26000.00	-	-	-	-	-	-	-
10	31200.00	-	-	-	-	-	-	-
11	#36400.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

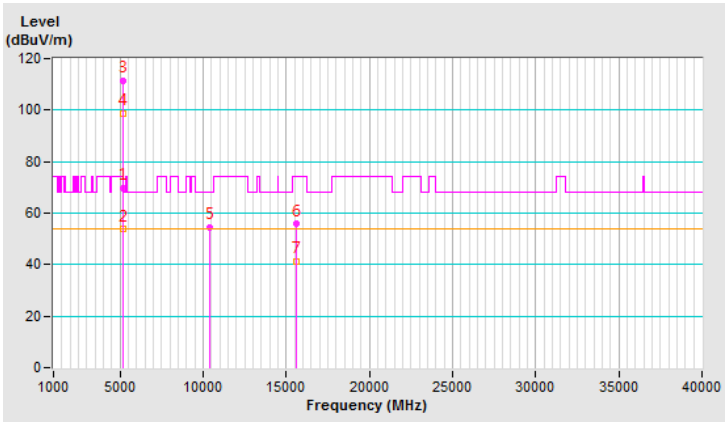


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 48：5.24 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	23℃	量 測 場 地 濕 度 ：	67%RH
測 試 日 期 ：	109 年 1 月 22 日	測 試 者 ：	柯其宗

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	53.8 PK	74.0	-20.2	2.66 H	167	50.8	3.0
2	5150.00	38.8 AV	54.0	-15.2	2.66 H	167	35.8	3.0
3	*5240.00	100.3 PK			2.66 H	167	97.7	2.6
4	*5240.00	90.3 AV			2.66 H	167	87.7	2.6
5	5350.00	50.9 PK	74.0	-23.1	2.66 H	167	48.3	2.6
6	5350.00	37.4 AV	54.0	-16.6	2.66 H	167	34.8	2.6
7	#10480.00	53.2 PK	68.2	-15.0	1.13 H	136	40.7	12.5
8	15720.00	50.7 PK	74.0	-23.3	2.76 H	57	38.5	12.2
9	15720.00	38.5 AV	54.0	-15.5	2.76 H	57	26.3	12.2
10	20960.00	-	-	-	-	-	-	-
11	#26200.00	-	-	-	-	-	-	-
12	31440.00	-	-	-	-	-	-	-
13	#36680.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

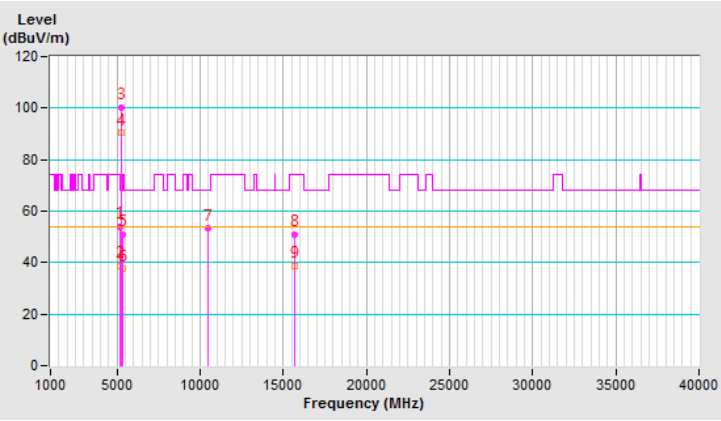


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 48：5.24 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	23℃	量 測 場 地 濕 度 ：	67%RH
測 試 日 期 ：	109 年 1 月 22 日	測 試 者 ：	柯其宗

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	53.4 PK	74.0	-20.6	2.58 V	233	50.4	3.0
2	5150.00	38.4 AV	54.0	-15.6	2.58 V	233	35.4	3.0
3	*5240.00	109.5 PK			2.58 V	233	106.9	2.6
4	*5240.00	97.3 AV			2.58 V	233	94.7	2.6
5	5350.00	50.5 PK	74.0	-23.5	2.58 V	233	47.9	2.6
6	5350.00	37.3 AV	54.0	-16.7	2.58 V	233	34.7	2.6
7	#10480.00	52.1 PK	68.2	-16.1	2.15 V	131	39.6	12.5
8	15720.00	52.6 PK	74.0	-21.4	1.10 V	80	40.4	12.2
9	15720.00	38.6 AV	54.0	-15.4	1.10 V	80	26.4	12.2
10	20960.00	-	-	-	-	-	-	-
11	#26200.00	-	-	-	-	-	-	-
12	31440.00	-	-	-	-	-	-	-
13	#36680.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

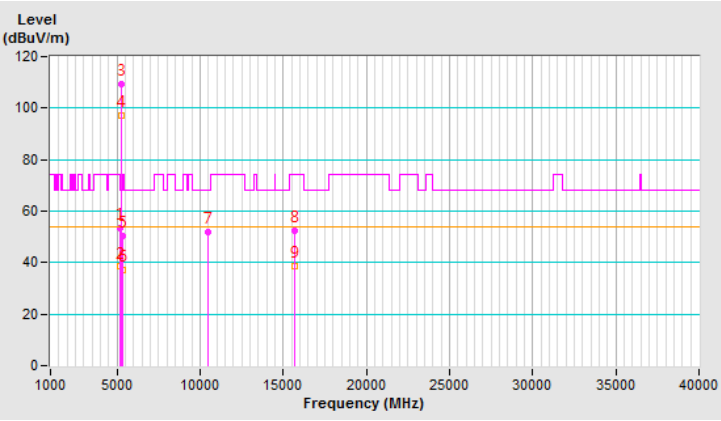


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 52：5.26 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	71%RH
測 試 日 期 ：	109 年 2 月 28 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	47.1 PK	74.0	-26.9	2.78 H	138	44.1	3.0
2	5150.00	36.5 AV	54.0	-17.5	2.78 H	138	33.5	3.0
3	*5260.00	96.3 PK			2.78 H	138	93.8	2.5
4	*5260.00	86.8 AV			2.78 H	138	84.3	2.5
5	#10520.00	42.0 PK	68.2	-26.2	3.41 H	185	29.4	12.6
6	15780.00	44.3 PK	74.0	-29.7	1.70 H	161	32.5	11.8
7	15780.00	33.3 AV	54.0	-20.7	1.70 H	161	21.5	11.8
8	21040.00	-	-	-	-	-	-	-
9	#26300.00	-	-	-	-	-	-	-
10	31560.00	-	-	-	-	-	-	-
11	#36820.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

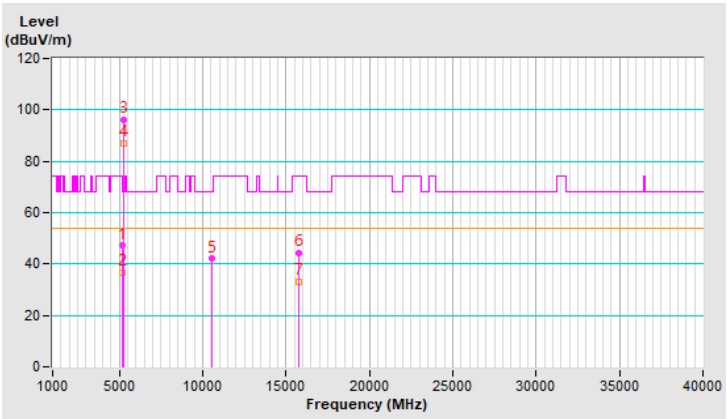


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 52：5.26 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	71%RH
測 試 日 期 ：	109 年 2 月 28 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	50.6 PK	74.0	-23.4	3.35 V	176	47.6	3.0
2	5150.00	39.6 AV	54.0	-14.4	3.35 V	176	36.6	3.0
3	*5260.00	108.4 PK			3.35 V	176	105.9	2.5
4	*5260.00	96.2 AV			3.35 V	176	93.7	2.5
5	#10520.00	42.1 PK	68.2	-26.1	2.82 V	205	29.5	12.6
6	15780.00	44.1 PK	74.0	-29.9	3.61 V	163	32.3	11.8
7	15780.00	33.0 AV	54.0	-21.0	3.61 V	163	21.2	11.8
8	21040.00	-	-	-	-	-	-	-
9	#26300.00	-	-	-	-	-	-	-
10	31560.00	-	-	-	-	-	-	-
11	#36820.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

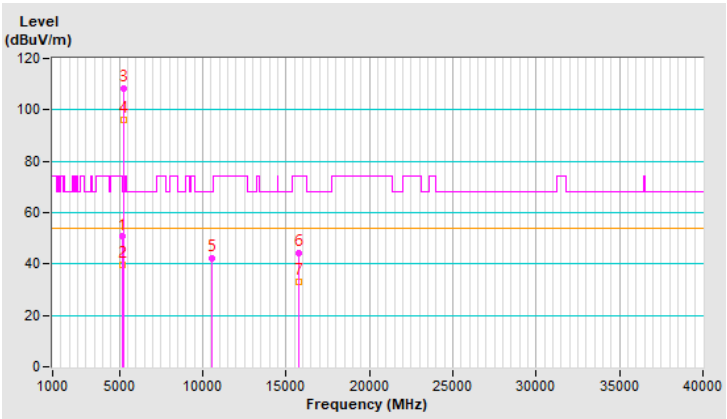


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 60：5.3 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	71%RH
測 試 日 期 ：	109 年 2 月 28 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5300.00	96.4 PK			2.80 H	125	94.0	2.4
2	*5300.00	86.8 AV			2.80 H	125	84.4	2.4
3	10600.00	41.5 PK	74.0	-32.5	3.40 H	188	29.1	12.4
4	10600.00	28.6 AV	54.0	-25.4	3.40 H	188	16.2	12.4
5	15900.00	44.8 PK	74.0	-29.2	1.77 H	162	32.7	12.1
6	15900.00	33.7 AV	54.0	-20.3	1.77 H	162	21.6	12.1
7	21200.00	-	-	-	-	-	-	-
8	#26500.00	-	-	-	-	-	-	-
9	31800.00	-	-	-	-	-	-	-
10	#37100.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

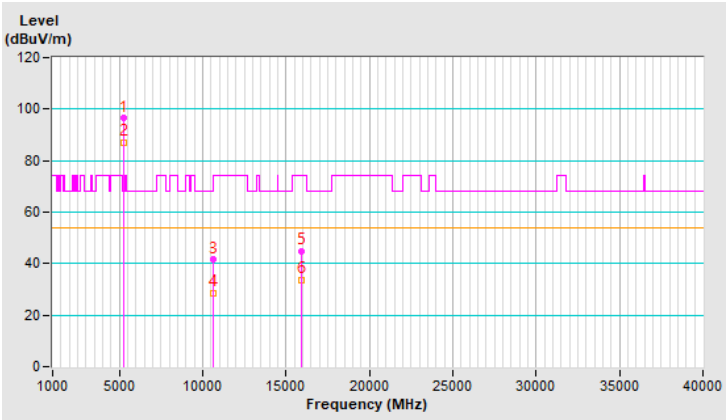


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 60：5.3 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	71%RH
測 試 日 期 ：	109 年 2 月 28 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5300.00	108.2 PK			3.31 V	179	105.8	2.4
2	*5300.00	96.1 AV			3.31 V	179	93.7	2.4
3	10600.00	43.0 PK	74.0	-31.0	2.79 V	179	30.6	12.4
4	10600.00	29.8 AV	54.0	-24.2	2.79 V	179	17.4	12.4
5	15900.00	43.8 PK	74.0	-30.2	3.56 V	176	31.7	12.1
6	15900.00	33.1 AV	54.0	-20.9	3.56 V	176	21.0	12.1
7	21200.00	-	-	-	-	-	-	-
8	#26500.00	-	-	-	-	-	-	-
9	31800.00	-	-	-	-	-	-	-
10	#37100.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

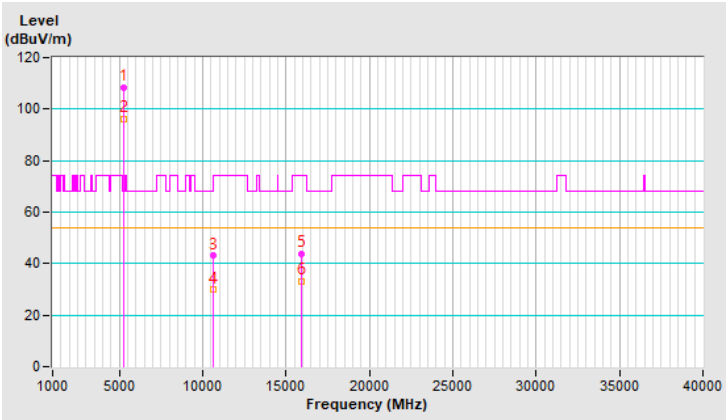


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 64：5.32 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	71%RH
測 試 日 期 ：	109 年 2 月 28 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5320.00	96.4 PK			2.80 H	143	93.9	2.5
2	*5320.00	87.2 AV			2.80 H	143	84.7	2.5
3	5350.00	66.9 PK	74.0	-7.1	2.80 H	143	64.3	2.6
4	5350.00	49.3 AV	54.0	-4.7	2.80 H	143	46.7	2.6
5	10640.00	42.1 PK	74.0	-31.9	3.38 H	202	29.7	12.4
6	10640.00	28.8 AV	54.0	-25.2	3.38 H	202	16.4	12.4
7	15960.00	44.6 PK	74.0	-29.4	1.76 H	163	32.2	12.4
8	15960.00	33.3 AV	54.0	-20.7	1.76 H	163	20.9	12.4
9	21280.00	-	-	-	-	-	-	-
10	#26600.00	-	-	-	-	-	-	-
11	#31920.00	-	-	-	-	-	-	-
12	#37240.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

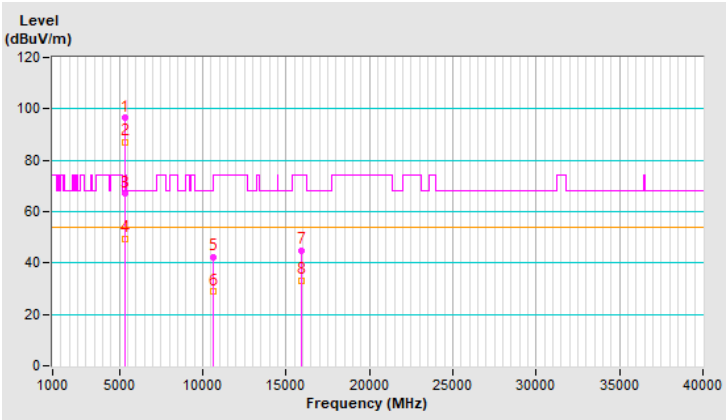


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 64：5.32 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	71%RH
測 試 日 期 ：	109 年 2 月 28 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5320.00	109.4 PK			2.97 V	220	106.9	2.5
2	*5320.00	97.3 AV			2.97 V	220	94.8	2.5
3	5350.00	70.5 PK	74.0	-3.5	2.97 V	220	67.9	2.6
4	5350.00	52.8 AV	54.0	-1.2	2.97 V	220	50.2	2.6
5	10640.00	41.9 PK	74.0	-32.1	2.77 V	178	29.5	12.4
6	10640.00	28.9 AV	54.0	-25.1	2.77 V	178	16.5	12.4
7	15960.00	43.8 PK	74.0	-30.2	3.60 V	167	31.4	12.4
8	15960.00	32.9 AV	54.0	-21.1	3.60 V	167	20.5	12.4
9	21280.00	-	-	-	-	-	-	-
10	#26600.00	-	-	-	-	-	-	-
11	#31920.00	-	-	-	-	-	-	-
12	#37240.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

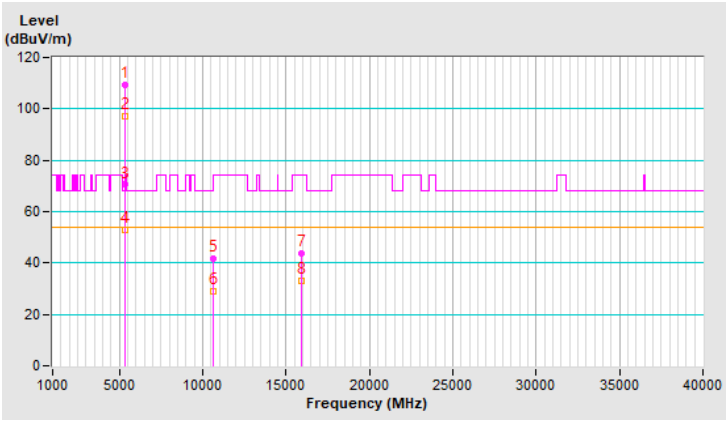


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 100：5.5 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	71%RH
測 試 日 期 ：	109 年 2 月 28 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	59.2 PK	74.0	-14.8	2.83 H	131	56.2	3.0
2	5460.00	38.5 AV	54.0	-15.5	2.83 H	131	35.5	3.0
3	#5470.00	63.4 PK	68.2	-4.8	2.83 H	131	60.3	3.1
4	*5500.00	96.6 PK			2.83 H	131	93.5	3.1
5	*5500.00	87.2 AV			2.83 H	131	84.1	3.1
6	11000.00	41.8 PK	74.0	-32.2	3.33 H	198	29.2	12.6
7	11000.00	28.6 AV	54.0	-25.4	3.33 H	198	16.0	12.6
8	#16500.00	44.2 PK	68.2	-24.0	1.73 H	185	30.6	13.6
9	#22000.00	-	-	-	-	-	-	-
10	#27500.00	-	-	-	-	-	-	-
11	#33000.00	-	-	-	-	-	-	-
12	#38500.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

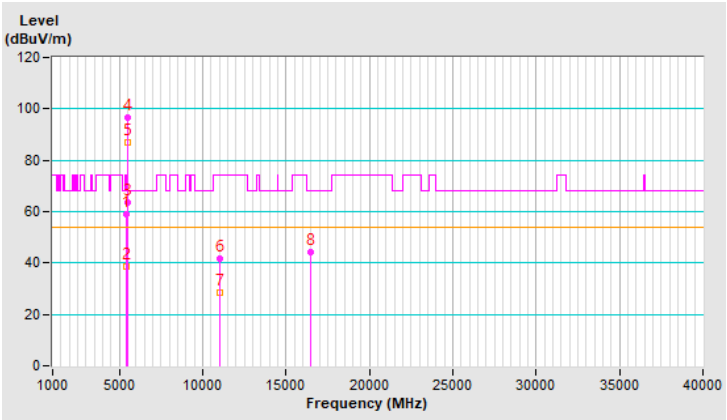


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 100：5.5 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	71%RH
測 試 日 期 ：	109 年 2 月 28 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	62.6 PK	74.0	-11.4	3.26 V	342	59.6	3.0
2	5460.00	41.7 AV	54.0	-12.3	3.26 V	342	38.7	3.0
3	#5470.00	67.9 PK	68.2	-0.3	3.26 V	342	64.8	3.1
4	*5500.00	108.6 PK			3.26 V	342	105.5	3.1
5	*5500.00	96.2 AV			3.26 V	342	93.1	3.1
6	11000.00	42.5 PK	74.0	-31.5	2.79 V	189	29.9	12.6
7	11000.00	29.4 AV	54.0	-24.6	2.79 V	189	16.8	12.6
8	#16500.00	44.4 PK	68.2	-23.8	3.66 V	181	30.8	13.6
9	#22000.00	-	-	-	-	-	-	-
10	#27500.00	-	-	-	-	-	-	-
11	#33000.00	-	-	-	-	-	-	-
12	#38500.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

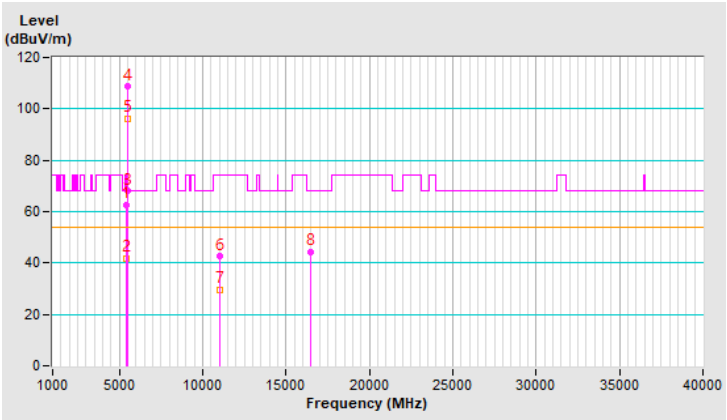


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 116：5.58 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	71%RH
測 試 日 期 ：	109 年 2 月 28 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5580.00	96.1 PK			2.79 H	122	93.1	3.0
2	*5580.00	86.5 AV			2.79 H	122	83.5	3.0
3	11160.00	42.0 PK	74.0	-32.0	3.42 H	192	29.6	12.4
4	11160.00	28.9 AV	54.0	-25.1	3.42 H	192	16.5	12.4
5	#16740.00	44.5 PK	68.2	-23.7	1.71 H	167	29.7	14.8
6	22320.00	-	-	-	-	-	-	-
7	#27900.00	-	-	-	-	-	-	-
8	#33480.00	-	-	-	-	-	-	-
9	39060.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

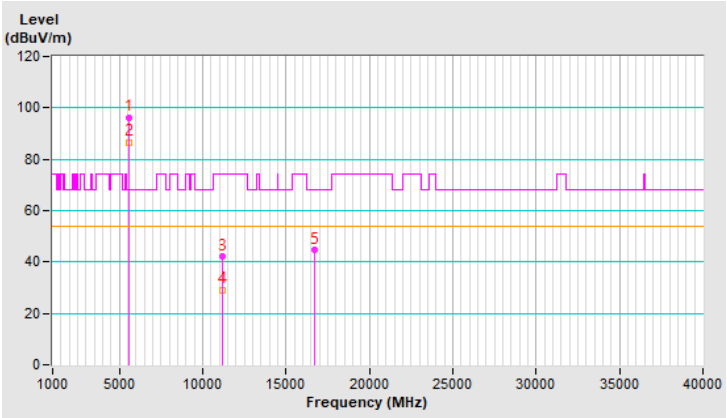


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 116：5.58 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	71%RH
測 試 日 期 ：	109 年 2 月 28 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5580.00	109.1 PK			2.62 V	264	106.1	3.0
2	*5580.00	97.1 AV			2.62 V	264	94.1	3.0
3	11160.00	41.9 PK	74.0	-32.1	2.71 V	203	29.5	12.4
4	11160.00	28.9 AV	54.0	-25.1	2.71 V	203	16.5	12.4
5	#16740.00	44.5 PK	68.2	-23.7	3.56 V	176	29.7	14.8
6	22320.00	-	-	-	-	-	-	-
7	#27900.00	-	-	-	-	-	-	-
8	#33480.00	-	-	-	-	-	-	-
9	39060.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

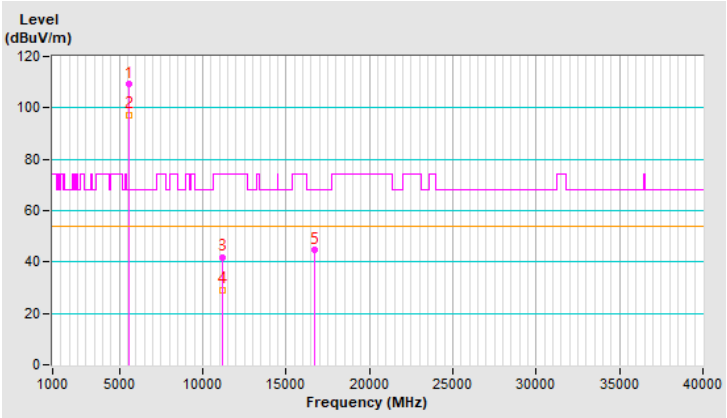


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 140：5.7 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	71%RH
測 試 日 期 ：	109 年 2 月 28 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5700.00	96.3 PK			2.87 H	121	93.1	3.2
2	*5700.00	87.0 AV			2.87 H	121	83.8	3.2
3	#5725.00	65.3 PK	68.2	-2.9	2.87 H	121	62.0	3.3
4	11400.00	42.5 PK	74.0	-31.5	3.40 H	186	29.5	13.0
5	11400.00	29.3 AV	54.0	-24.7	3.40 H	186	16.3	13.0
6	#17100.00	45.3 PK	68.2	-22.9	1.74 H	186	29.0	16.3
7	22800.00	-	-	-	-	-	-	-
8	#28500.00	-	-	-	-	-	-	-
9	#34200.00	-	-	-	-	-	-	-
10	39900.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

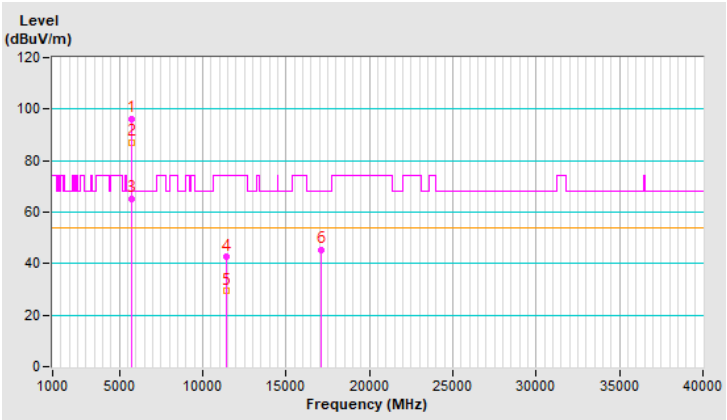


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 140：5.7 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	71%RH
測 試 日 期 ：	109 年 2 月 28 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5700.00	106.5 PK			2.62 V	252	103.3	3.2
2	*5700.00	94.6 AV			2.62 V	252	91.4	3.2
3	#5725.00	68.0 PK	68.2	-0.2	2.62 V	252	64.7	3.3
4	11400.00	42.5 PK	74.0	-31.5	2.71 V	190	29.5	13.0
5	11400.00	29.3 AV	54.0	-24.7	2.71 V	190	16.3	13.0
6	#17100.00	44.2 PK	68.2	-24.0	3.59 V	165	27.9	16.3
7	22800.00	-	-	-	-	-	-	-
8	#28500.00	-	-	-	-	-	-	-
9	#34200.00	-	-	-	-	-	-	-
10	39900.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

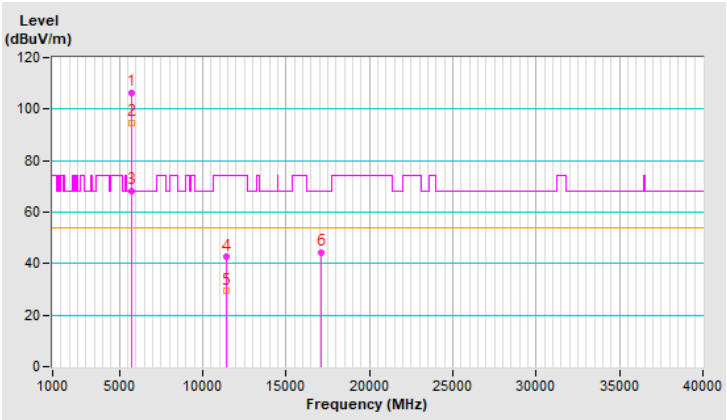


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 144：5.72 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	71%RH
測 試 日 期 ：	109 年 2 月 28 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	49.2 PK	74.0	-24.8	2.87 H	152	46.2	3.0
2	5460.00	36.7 AV	54.0	-17.3	2.87 H	152	33.7	3.0
3	#5470.00	49.3 PK	68.2	-18.9	2.87 H	152	46.2	3.1
4	*5720.00	96.8 PK			2.87 H	152	93.6	3.2
5	*5720.00	87.2 AV			2.87 H	152	84.0	3.2
6	#5850.00	51.1 PK	68.2	-17.1	2.87 H	152	47.4	3.7
7	11440.00	42.0 PK	74.0	-32.0	3.32 H	196	29.2	12.8
8	11440.00	28.8 AV	54.0	-25.2	3.32 H	196	16.0	12.8
9	#17160.00	44.2 PK	68.2	-24.0	1.74 H	188	27.6	16.6
10	22880.00	-	-	-	-	-	-	-
11	#28600.00	-	-	-	-	-	-	-
12	#34320.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

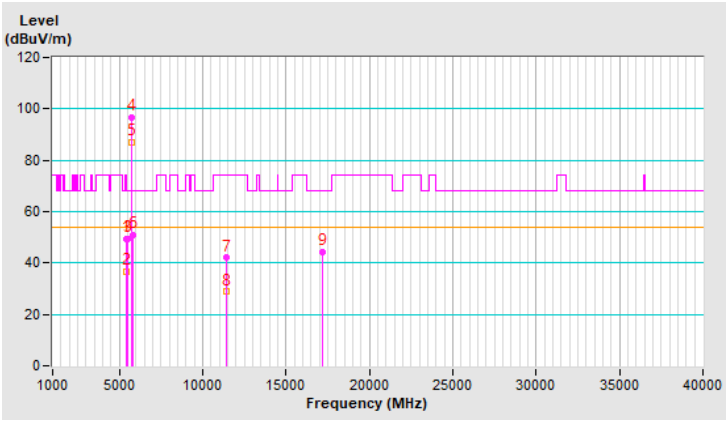


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 144：5.72 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	71%RH
測 試 日 期 ：	109 年 2 月 28 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	49.5 PK	74.0	-24.5	2.63 V	263	46.5	3.0
2	5460.00	36.9 AV	54.0	-17.1	2.63 V	263	33.9	3.0
3	#5470.00	49.5 PK	68.2	-18.7	2.63 V	263	46.4	3.1
4	*5720.00	109.3 PK			2.63 V	263	106.1	3.2
5	*5720.00	97.4 AV			2.63 V	263	94.2	3.2
6	#5850.00	52.4 PK	68.2	-15.8	2.63 V	263	48.7	3.7
7	11440.00	42.0 PK	74.0	-32.0	2.80 V	199	29.2	12.8
8	11440.00	28.9 AV	54.0	-25.1	2.80 V	199	16.1	12.8
9	#17160.00	44.6 PK	68.2	-23.6	3.67 V	160	28.0	16.6
10	22880.00	-	-	-	-	-	-	-
11	#28600.00	-	-	-	-	-	-	-
12	#34320.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

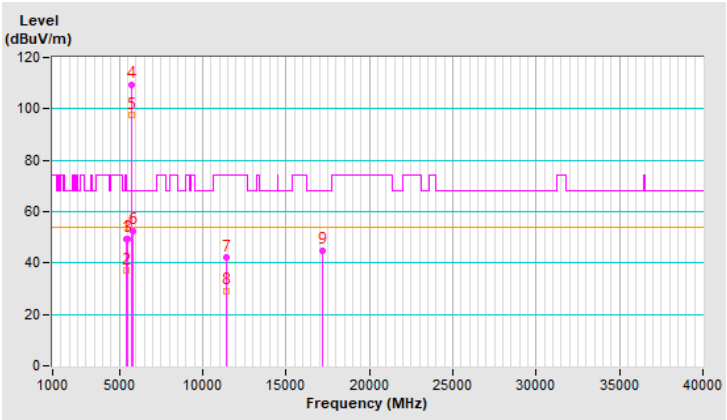


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 149：5.745 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	23℃	量 測 場 地 濕 度 ：	67%RH
測 試 日 期 ：	109 年 1 月 22 日	測 試 者 ：	柯其宗

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5745.00	104.7 PK			2.52 H	138	101.4	3.3
2	*5745.00	92.6 AV			2.52 H	138	89.3	3.3
3	11490.00	61.8 PK	74.0	-12.2	1.09 H	139	49.2	12.6
4	11490.00	49.3 AV	54.0	-4.7	1.09 H	139	36.7	12.6
5	#17235.00	50.7 PK	68.2	-17.5	2.81 H	52	33.9	16.8
6	22980.00	-	-	-	-	-	-	-
7	#28725.00	-	-	-	-	-	-	-
8	#34470.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

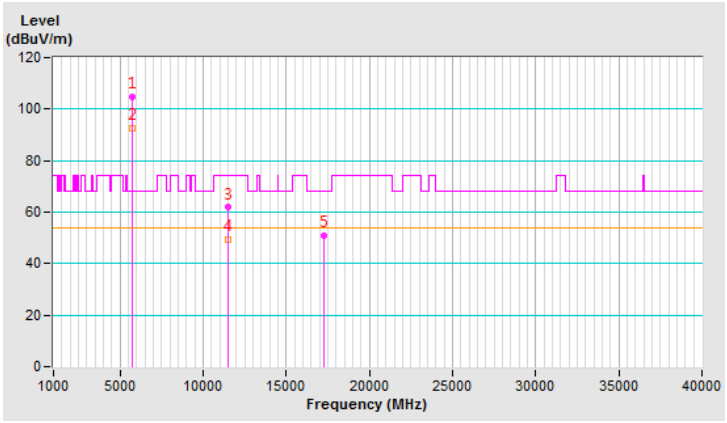


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 149：5.745 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	23℃	量 測 場 地 濕 度 ：	67%RH
測 試 日 期 ：	109 年 1 月 22 日	測 試 者 ：	柯其宗

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5745.00	111.9 PK			2.62 V	190	108.6	3.3
2	*5745.00	99.3 AV			2.62 V	190	96.0	3.3
3	11490.00	61.2 PK	74.0	-12.8	1.53 V	4	48.6	12.6
4	11490.00	48.3 AV	54.0	-5.7	1.53 V	4	35.7	12.6
5	#17235.00	52.0 PK	68.2	-16.2	2.02 V	117	35.2	16.8
6	22980.00	-	-	-	-	-	-	-
7	#28725.00	-	-	-	-	-	-	-
8	#34470.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

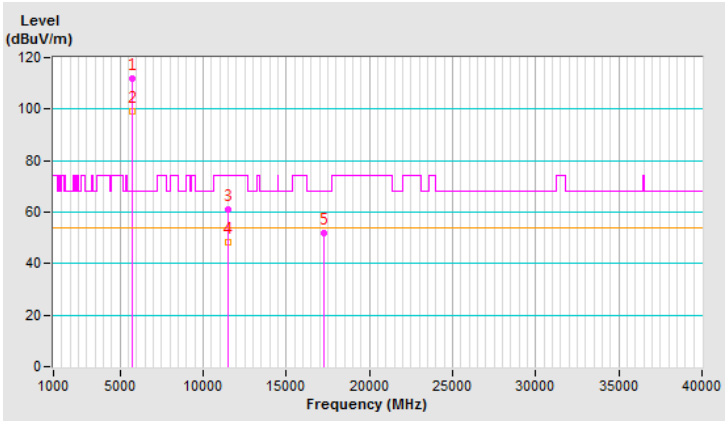


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 157：5.785 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	23℃	量 測 場 地 濕 度 ：	67%RH
測 試 日 期 ：	109 年 1 月 22 日	測 試 者 ：	柯其宗

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5785.00	103.4 PK			2.45 H	133	100.0	3.4
2	*5785.00	91.7 AV			2.45 H	133	88.3	3.4
3	11570.00	60.9 PK	74.0	-13.1	1.02 H	167	48.7	12.2
4	11570.00	48.6 AV	54.0	-5.4	1.02 H	167	36.4	12.2
5	#17355.00	51.0 PK	68.2	-17.2	2.79 H	36	34.4	16.6
6	#23140.00	-	-	-	-	-	-	-
7	#28925.00	-	-	-	-	-	-	-
8	#34710.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

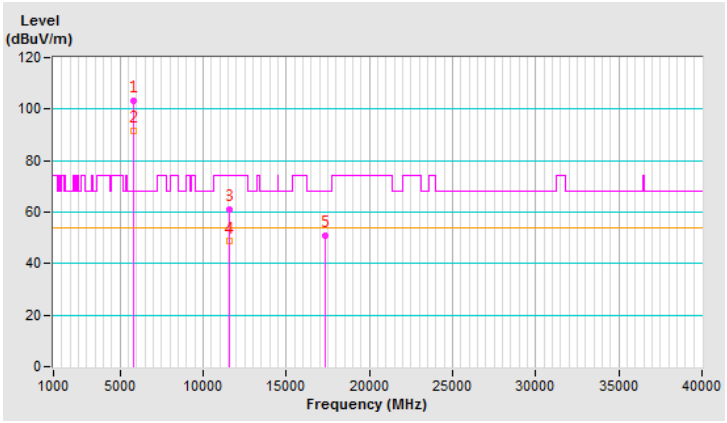


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 157：5.785 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	23℃	量 測 場 地 濕 度 ：	67%RH
測 試 日 期 ：	109 年 1 月 22 日	測 試 者 ：	柯其宗

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5785.00	112.2 PK			2.52 V	250	108.8	3.4
2	*5785.00	99.6 AV			2.52 V	250	96.2	3.4
3	11570.00	61.5 PK	74.0	-12.5	1.59 V	14	49.3	12.2
4	11570.00	48.6 AV	54.0	-5.4	1.59 V	14	36.4	12.2
5	#17355.00	52.1 PK	68.2	-16.1	2.00 V	96	35.5	16.6
6	#23140.00	-	-	-	-	-	-	-
7	#28925.00	-	-	-	-	-	-	-
8	#34710.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

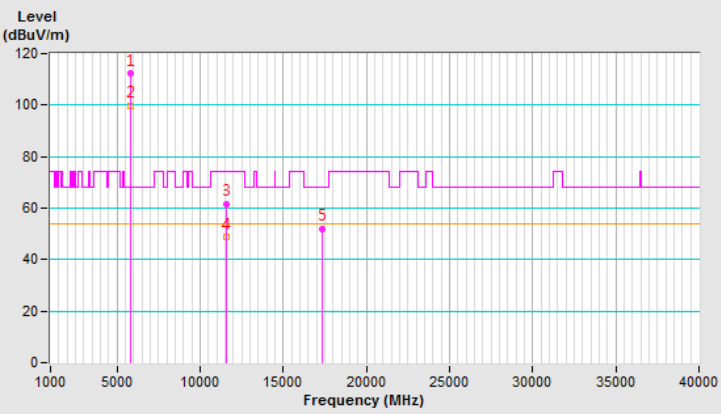


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 165：5.825 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	23℃	量 測 場 地 濕 度 ：	67%RH
測 試 日 期 ：	109 年 1 月 22 日	測 試 者 ：	柯其宗

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5825.00	103.2 PK			2.40 H	134	99.6	3.6
2	*5825.00	91.2 AV			2.40 H	134	87.6	3.6
3	11650.00	61.0 PK	74.0	-13.0	1.10 H	159	48.6	12.4
4	11650.00	48.8 AV	54.0	-5.2	1.10 H	159	36.4	12.4
5	#17475.00	51.3 PK	68.2	-16.9	2.86 H	49	34.3	17.0
6	#23300.00	-	-	-	-	-	-	-
7	#29125.00	-	-	-	-	-	-	-
8	#34950.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

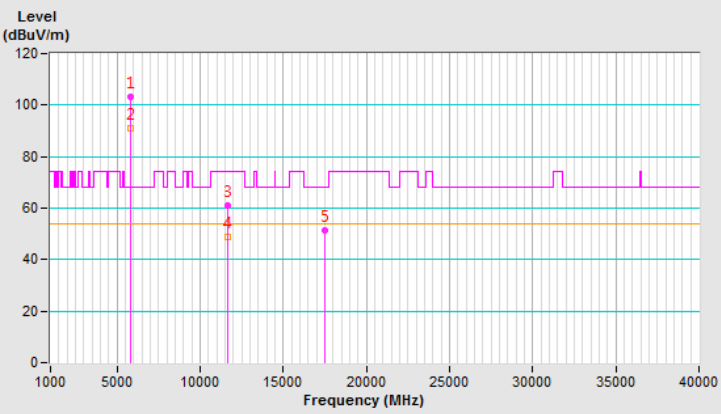


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 165：5.825 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	23℃	量 測 場 地 濕 度 ：	67%RH
測 試 日 期 ：	109 年 1 月 22 日	測 試 者 ：	柯其宗

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5825.00	110.6 PK			2.51 V	233	107.0	3.6
2	*5825.00	99.0 AV			2.51 V	233	95.4	3.6
3	11650.00	61.0 PK	74.0	-13.0	1.56 V	0	48.6	12.4
4	11650.00	48.0 AV	54.0	-6.0	1.56 V	0	35.6	12.4
5	#17475.00	52.1 PK	68.2	-16.1	1.97 V	110	35.1	17.0
6	#23300.00	-	-	-	-	-	-	-
7	#29125.00	-	-	-	-	-	-	-
8	#34950.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

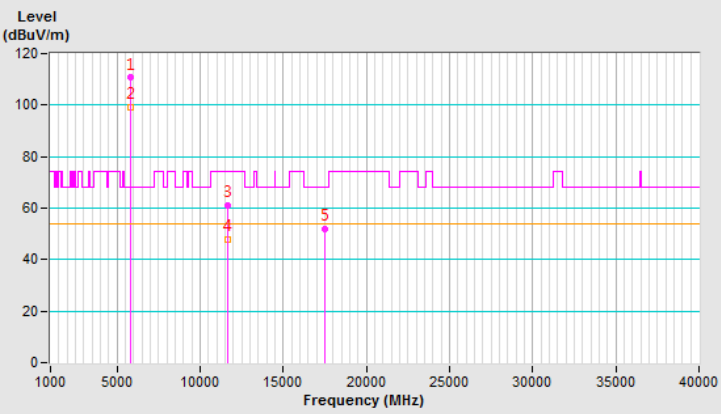


802.11ax (HE40)

操作模式：	發射	調變技術：	OFDMA
基本波頻率：	CH 38：5.19 GHz	測試儀器：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量測場地溫度：	23℃	量測場地濕度：	67%RH
測試日期：	109 年 1 月 22 日	測試者：	柯其宗

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	65.3 PK	74.0	-8.7	2.58 H	147	62.3	3.0
2	5150.00	48.7 AV	54.0	-5.3	2.58 H	147	45.7	3.0
3	*5190.00	97.7 PK			2.58 H	147	94.8	2.9
4	*5190.00	85.3 AV			2.58 H	147	82.4	2.9
5	#10380.00	51.7 PK	68.2	-16.5	1.15 H	149	39.5	12.2
6	15570.00	52.7 PK	74.0	-21.3	2.72 H	72	39.7	13.0
7	15570.00	38.6 AV	54.0	-15.4	2.72 H	72	25.6	13.0
8	20760.00	-	-	-	-	-	-	-
9	#25950.00	-	-	-	-	-	-	-
10	#31140.00	-	-	-	-	-	-	-
11	#36330.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

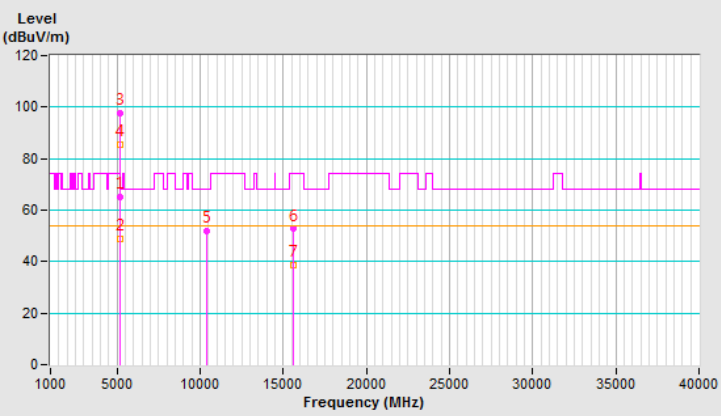


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 38：5.19 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	23℃	量 測 場 地 濕 度 ：	67%RH
測 試 日 期 ：	109 年 1 月 22 日	測 試 者 ：	柯其宗

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	70.6 PK	74.0	-3.4	2.53 V	203	67.6	3.0
2	5150.00	53.5 AV	54.0	-0.5	2.53 V	203	50.5	3.0
3	*5190.00	103.7 PK			2.53 V	203	100.8	2.9
4	*5190.00	91.3 AV			2.53 V	203	88.4	2.9
5	#10380.00	51.7 PK	68.2	-16.5	2.16 V	108	39.5	12.2
6	15570.00	52.7 PK	74.0	-21.3	1.00 V	76	39.7	13.0
7	15570.00	38.6 AV	54.0	-15.4	1.00 V	76	25.6	13.0
8	20760.00	-	-	-	-	-	-	-
9	#25950.00	-	-	-	-	-	-	-
10	#31140.00	-	-	-	-	-	-	-
11	#36330.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

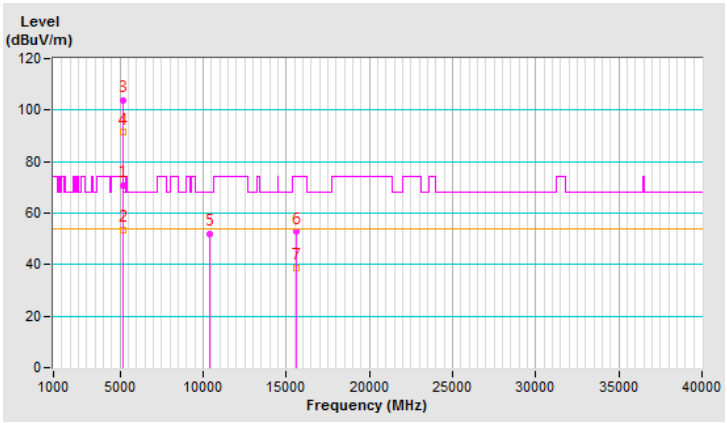


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 46：5.23 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	23℃	量 測 場 地 濕 度 ：	67%RH
測 試 日 期 ：	109 年 1 月 22 日	測 試 者 ：	柯其宗

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	53.9 PK	74.0	-20.1	2.58 H	159	50.9	3.0
2	5150.00	39.1 AV	54.0	-14.9	2.58 H	159	36.1	3.0
3	*5230.00	101.3 PK			2.58 H	159	98.7	2.6
4	*5230.00	88.6 AV			2.58 H	159	86.0	2.6
5	5350.00	50.8 PK	74.0	-23.2	2.58 H	159	48.2	2.6
6	5350.00	37.2 AV	54.0	-16.8	2.58 H	159	34.6	2.6
7	#10460.00	51.7 PK	68.2	-16.5	1.15 H	134	39.3	12.4
8	15690.00	52.7 PK	74.0	-21.3	2.80 H	48	40.3	12.4
9	15690.00	38.6 AV	54.0	-15.4	2.80 H	48	26.2	12.4
10	20920.00	-	-	-	-	-	-	-
11	#26150.00	-	-	-	-	-	-	-
12	31380.00	-	-	-	-	-	-	-
13	#36610.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

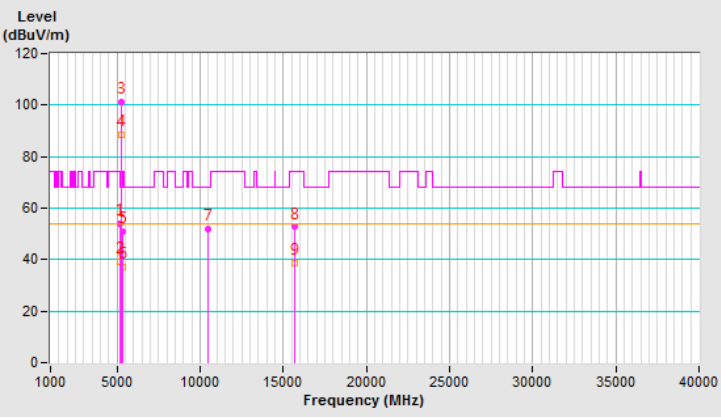


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 46：5.23 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	23℃	量 測 場 地 濕 度 ：	67%RH
測 試 日 期 ：	109 年 1 月 22 日	測 試 者 ：	柯其宗

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	60.2 PK	74.0	-13.8	2.60 V	233	57.2	3.0
2	5150.00	44.1 AV	54.0	-9.9	2.60 V	233	41.1	3.0
3	*5230.00	107.4 PK			2.60 V	233	104.8	2.6
4	*5230.00	94.4 AV			2.60 V	233	91.8	2.6
5	5350.00	53.4 PK	74.0	-20.6	2.60 V	233	50.8	2.6
6	5350.00	38.7 AV	54.0	-15.3	2.60 V	233	36.1	2.6
7	#10460.00	51.1 PK	68.2	-17.1	2.06 V	115	38.7	12.4
8	15690.00	52.6 PK	74.0	-21.4	1.07 V	101	40.2	12.4
9	15690.00	38.3 AV	54.0	-15.7	1.07 V	101	25.9	12.4
10	20920.00	-	-	-	-	-	-	-
11	#26150.00	-	-	-	-	-	-	-
12	31380.00	-	-	-	-	-	-	-
13	#36610.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

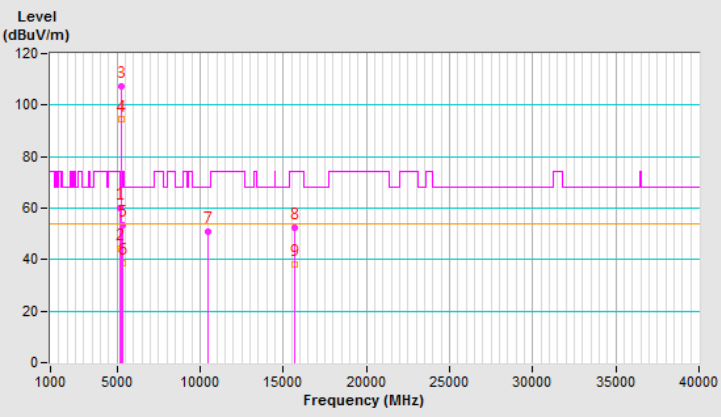


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 54：5.27 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	71%RH
測 試 日 期 ：	109 年 2 月 28 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	54.1 PK	74.0	-19.9	2.83 H	139	51.1	3.0
2	5150.00	40.0 AV	54.0	-14.0	2.83 H	139	37.0	3.0
3	*5270.00	93.8 PK			2.83 H	139	91.3	2.5
4	*5270.00	83.1 AV			2.83 H	139	80.6	2.5
5	5350.00	55.1 PK	74.0	-18.9	2.83 H	139	52.5	2.6
6	5350.00	38.8 AV	54.0	-15.2	2.83 H	139	36.2	2.6
7	#10540.00	42.2 PK	68.2	-26.0	3.33 H	179	29.6	12.6
8	15810.00	44.2 PK	74.0	-29.8	1.81 H	184	32.5	11.7
9	15810.00	33.2 AV	54.0	-20.8	1.81 H	184	21.5	11.7
10	21080.00	-	-	-	-	-	-	-
11	#26350.00	-	-	-	-	-	-	-
12	31620.00	-	-	-	-	-	-	-
13	#36890.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

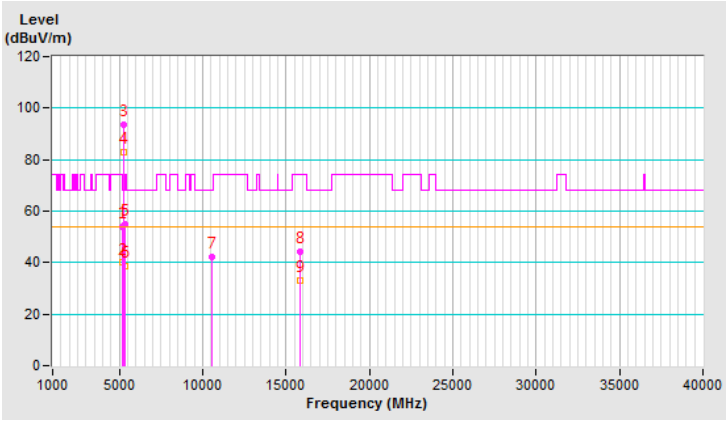


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 54：5.27 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	71%RH
測 試 日 期 ：	109 年 2 月 28 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	53.2 PK	74.0	-20.8	2.79 V	225	50.2	3.0
2	5150.00	40.5 AV	54.0	-13.5	2.79 V	225	37.5	3.0
3	*5270.00	105.8 PK			2.79 V	225	103.3	2.5
4	*5270.00	92.9 AV			2.79 V	225	90.4	2.5
5	5350.00	58.9 PK	74.0	-15.1	2.79 V	225	56.3	2.6
6	5350.00	42.1 AV	54.0	-11.9	2.79 V	225	39.5	2.6
7	#10540.00	42.2 PK	68.2	-26.0	2.79 V	176	29.6	12.6
8	15810.00	44.0 PK	74.0	-30.0	3.59 V	172	32.3	11.7
9	15810.00	33.4 AV	54.0	-20.6	3.59 V	172	21.7	11.7
10	21080.00	-	-	-	-	-	-	-
11	#26350.00	-	-	-	-	-	-	-
12	31620.00	-	-	-	-	-	-	-
13	#36890.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

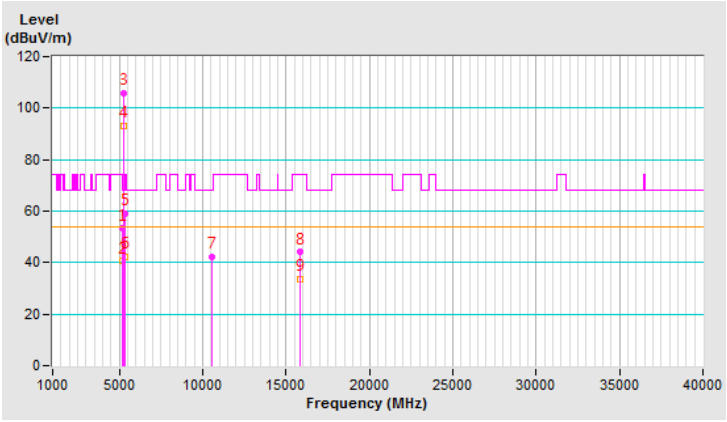


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 62：5.31 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	71%RH
測 試 日 期 ：	109 年 2 月 28 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5310.00	92.0 PK			2.78 H	127	89.6	2.4
2	*5310.00	81.1 AV			2.78 H	127	78.7	2.4
3	5350.00	67.3 PK	74.0	-6.7	2.78 H	127	64.7	2.6
4	5350.00	49.4 AV	54.0	-4.6	2.78 H	127	46.8	2.6
5	10620.00	41.2 PK	74.0	-32.8	3.37 H	176	28.8	12.4
6	10620.00	28.5 AV	54.0	-25.5	3.37 H	176	16.1	12.4
7	15930.00	44.3 PK	74.0	-29.7	1.79 H	166	32.1	12.2
8	15930.00	33.1 AV	54.0	-20.9	1.79 H	166	20.9	12.2
9	21240.00	-	-	-	-	-	-	-
10	#26550.00	-	-	-	-	-	-	-
11	#31860.00	-	-	-	-	-	-	-
12	#37170.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

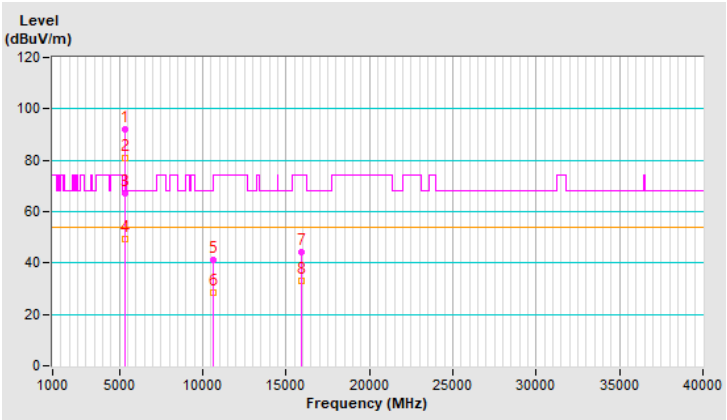


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 62：5.31 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	71%RH
測 試 日 期 ：	109 年 2 月 28 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5310.00	103.9 PK			2.90 V	223	101.5	2.4
2	*5310.00	91.7 AV			2.90 V	223	89.3	2.4
3	5350.00	72.4 PK	74.0	-1.6	2.90 V	223	69.8	2.6
4	5350.00	53.8 AV	54.0	-0.2	2.90 V	223	51.2	2.6
5	10620.00	43.0 PK	74.0	-31.0	2.80 V	189	30.6	12.4
6	10620.00	29.7 AV	54.0	-24.3	2.80 V	189	17.3	12.4
7	15930.00	44.0 PK	74.0	-30.0	3.57 V	153	31.8	12.2
8	15930.00	33.2 AV	54.0	-20.8	3.57 V	153	21.0	12.2
9	21240.00	-	-	-	-	-	-	-
10	#26550.00	-	-	-	-	-	-	-
11	#31860.00	-	-	-	-	-	-	-
12	#37170.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

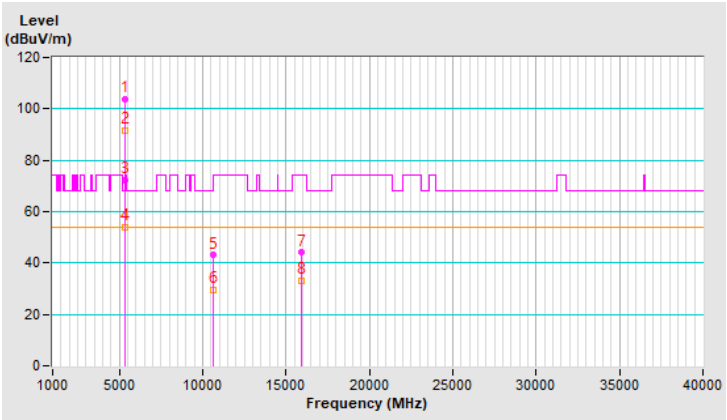


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 102 : 5.51 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	71%RH
測 試 日 期 ：	109 年 2 月 28 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	58.2 PK	74.0	-15.8	2.86 H	140	55.2	3.0
2	5460.00	41.7 AV	54.0	-12.3	2.86 H	140	38.7	3.0
3	#5470.00	64.5 PK	68.2	-3.7	2.86 H	140	61.4	3.1
4	*5510.00	92.2 PK			2.86 H	140	89.1	3.1
5	*5510.00	81.6 AV			2.86 H	140	78.5	3.1
6	11020.00	41.5 PK	74.0	-32.5	3.32 H	181	29.0	12.5
7	11020.00	28.4 AV	54.0	-25.6	3.32 H	181	15.9	12.5
8	#16530.00	44.6 PK	68.2	-23.6	1.76 H	172	30.7	13.9
9	22040.00	-	-	-	-	-	-	-
10	#27550.00	-	-	-	-	-	-	-
11	#33060.00	-	-	-	-	-	-	-
12	#38570.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

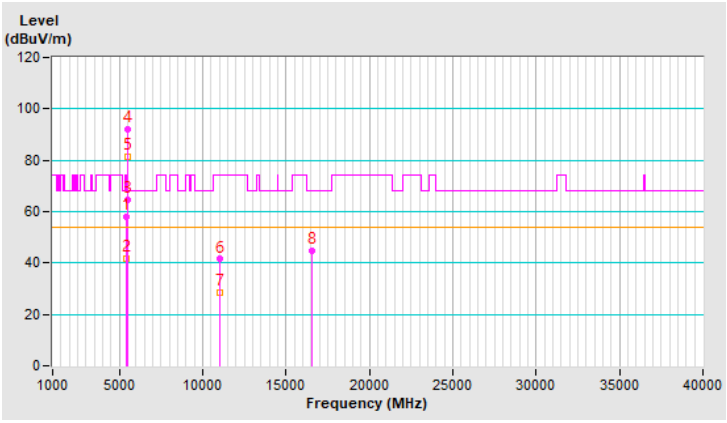


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 102：5.51 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	71%RH
測 試 日 期 ：	109 年 2 月 28 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	61.3 PK	74.0	-12.7	3.45 V	343	58.3	3.0
2	5460.00	44.5 AV	54.0	-9.5	3.45 V	343	41.5	3.0
3	#5470.00	67.9 PK	68.2	-0.3	3.45 V	343	64.8	3.1
4	*5510.00	103.6 PK			3.45 V	343	100.5	3.1
5	*5510.00	91.2 AV			3.45 V	343	88.1	3.1
6	11020.00	42.5 PK	74.0	-31.5	2.82 V	188	30.0	12.5
7	11020.00	29.4 AV	54.0	-24.6	2.82 V	188	16.9	12.5
8	#16530.00	44.1 PK	68.2	-24.1	3.67 V	162	30.2	13.9
9	22040.00	-	-	-	-	-	-	-
10	#27550.00	-	-	-	-	-	-	-
11	#33060.00	-	-	-	-	-	-	-
12	#38570.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

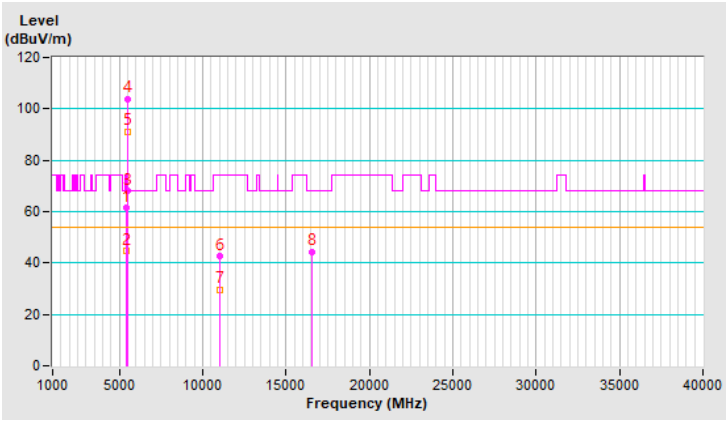


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 110：5.55 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	71%RH
測 試 日 期 ：	109 年 2 月 28 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5550.00	94.1 PK			2.84 H	148	91.1	3.0
2	*5550.00	83.3 AV			2.84 H	148	80.3	3.0
3	11100.00	42.2 PK	74.0	-31.8	3.40 H	180	29.9	12.3
4	11100.00	29.2 AV	54.0	-24.8	3.40 H	180	16.9	12.3
5	#16650.00	44.4 PK	68.2	-23.8	1.72 H	183	29.8	14.6
6	22200.00	-	-	-	-	-	-	-
7	#27750.00	-	-	-	-	-	-	-
8	#33300.00	-	-	-	-	-	-	-
9	38850.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

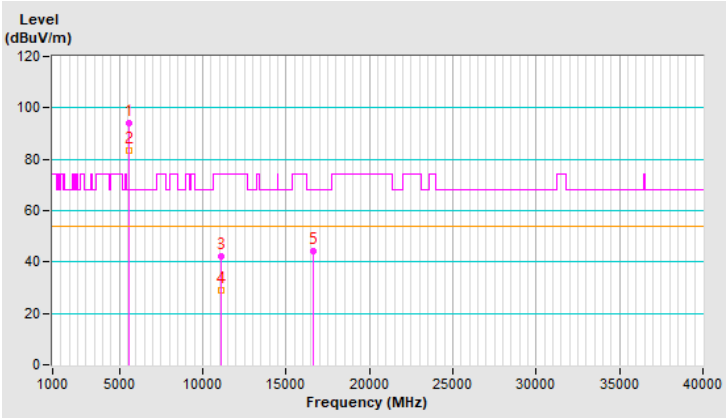


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 110：5.55 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	71%RH
測 試 日 期 ：	109 年 2 月 28 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5550.00	104.9 PK			2.78 V	191	101.9	3.0
2	*5550.00	93.4 AV			2.78 V	191	90.4	3.0
3	11100.00	41.9 PK	74.0	-32.1	2.75 V	200	29.6	12.3
4	11100.00	28.9 AV	54.0	-25.1	2.75 V	200	16.6	12.3
5	#16650.00	43.4 PK	68.2	-24.8	3.60 V	162	28.8	14.6
6	22200.00	-	-	-	-	-	-	-
7	#27750.00	-	-	-	-	-	-	-
8	#33300.00	-	-	-	-	-	-	-
9	38850.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

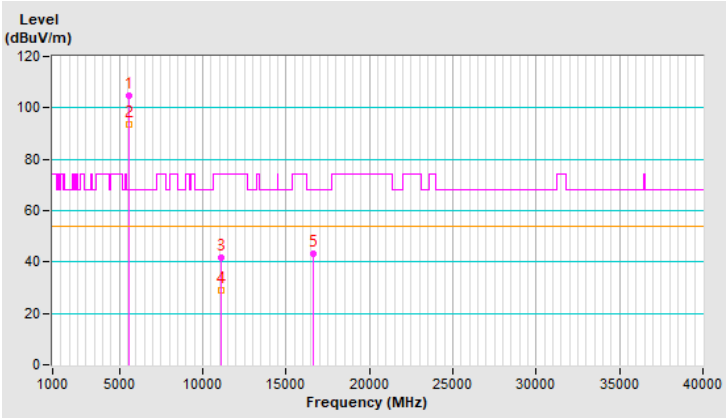


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 134：5.67 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	71%RH
測 試 日 期 ：	109 年 2 月 28 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5670.00	93.5 PK			2.88 H	128	90.3	3.2
2	*5670.00	82.7 AV			2.88 H	128	79.5	3.2
3	#5725.00	63.2 PK	68.2	-5.0	2.88 H	128	59.9	3.3
4	11340.00	41.6 PK	74.0	-32.4	3.33 H	202	28.7	12.9
5	11340.00	28.6 AV	54.0	-25.4	3.33 H	202	15.7	12.9
6	#17010.00	44.9 PK	68.2	-23.3	1.77 H	169	29.0	15.9
7	22680.00	-	-	-	-	-	-	-
8	#28350.00	-	-	-	-	-	-	-
9	#34020.00	-	-	-	-	-	-	-
10	39690.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

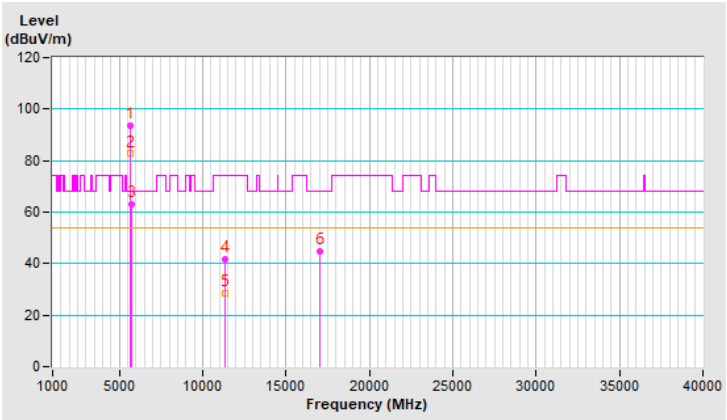


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 134：5.67 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	71%RH
測 試 日 期 ：	109 年 2 月 28 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5670.00	105.4 PK			2.89 V	248	102.2	3.2
2	*5670.00	94.2 AV			2.89 V	248	91.0	3.2
3	#5725.00	67.0 PK	68.2	-1.2	2.89 V	248	63.7	3.3
4	11340.00	43.1 PK	74.0	-30.9	2.81 V	195	30.2	12.9
5	11340.00	29.6 AV	54.0	-24.4	2.81 V	195	16.7	12.9
6	#17010.00	44.2 PK	68.2	-24.0	3.65 V	171	28.3	15.9
7	22680.00	-	-	-	-	-	-	-
8	#28350.00	-	-	-	-	-	-	-
9	#34020.00	-	-	-	-	-	-	-
10	39690.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

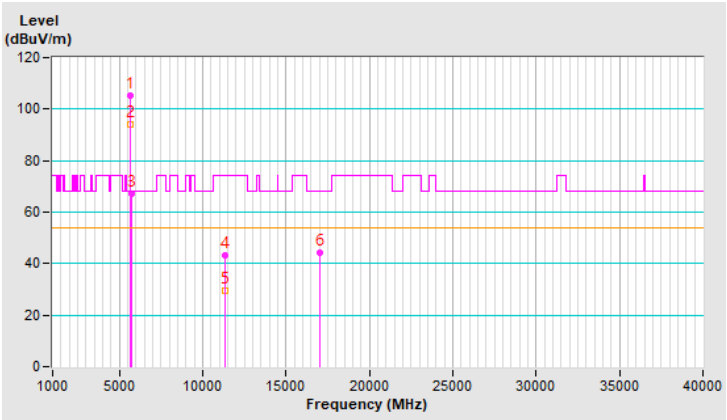


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 142 : 5.71 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	71%RH
測 試 日 期 ：	109 年 2 月 28 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	49.0 PK	74.0	-25.0	2.87 H	135	46.0	3.0
2	5460.00	36.8 AV	54.0	-17.2	2.87 H	135	33.8	3.0
3	#5470.00	49.1 PK	68.2	-19.1	2.87 H	135	46.0	3.1
4	*5710.00	93.5 PK			2.87 H	135	90.3	3.2
5	*5710.00	82.6 AV			2.87 H	135	79.4	3.2
6	#5850.00	51.6 PK	68.2	-16.6	2.87 H	135	47.9	3.7
7	11420.00	42.1 PK	74.0	-31.9	3.38 H	201	29.2	12.9
8	11420.00	28.9 AV	54.0	-25.1	3.38 H	201	16.0	12.9
9	#17130.00	44.8 PK	68.2	-23.4	1.75 H	164	28.4	16.4
10	22840.00	-	-	-	-	-	-	-
11	#28550.00	-	-	-	-	-	-	-
12	#34260.00	-	-	-	-	-	-	-
13	39970.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

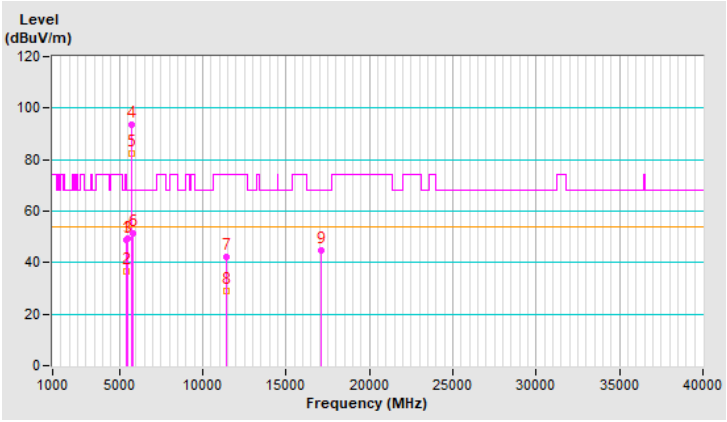


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 142 : 5.71 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	71%RH
測 試 日 期 ：	109 年 2 月 28 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	48.8 PK	74.0	-25.2	2.85 V	257	45.8	3.0
2	5460.00	36.4 AV	54.0	-17.6	2.85 V	257	33.4	3.0
3	#5470.00	49.7 PK	68.2	-18.5	2.85 V	257	46.6	3.1
4	*5710.00	105.2 PK			2.85 V	257	102.0	3.2
5	*5710.00	93.9 AV			2.85 V	257	90.7	3.2
6	#5850.00	51.8 PK	68.2	-16.4	2.85 V	257	48.1	3.7
7	11420.00	42.4 PK	74.0	-31.6	2.74 V	196	29.5	12.9
8	11420.00	29.0 AV	54.0	-25.0	2.74 V	196	16.1	12.9
9	#17130.00	43.8 PK	68.2	-24.4	3.65 V	167	27.4	16.4
10	22840.00	-	-	-	-	-	-	-
11	#28550.00	-	-	-	-	-	-	-
12	#34260.00	-	-	-	-	-	-	-
13	39970.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

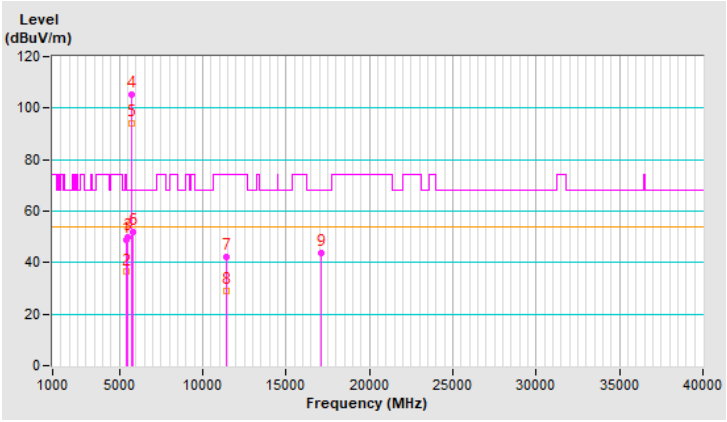


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 151：5.755 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	23℃	量 測 場 地 濕 度 ：	67%RH
測 試 日 期 ：	109 年 1 月 22 日	測 試 者 ：	柯其宗

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5755.00	99.8 PK			2.66 H	245	96.5	3.3
2	*5755.00	88.9 AV			2.66 H	245	85.6	3.3
3	11510.00	55.8 PK	74.0	-18.2	1.04 H	168	43.3	12.5
4	11510.00	43.3 AV	54.0	-10.7	1.04 H	168	30.8	12.5
5	#17265.00	50.6 PK	68.2	-17.6	2.78 H	23	34.0	16.6
6	23020.00	-	-	-	-	-	-	-
7	#28775.00	-	-	-	-	-	-	-
8	#34530.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

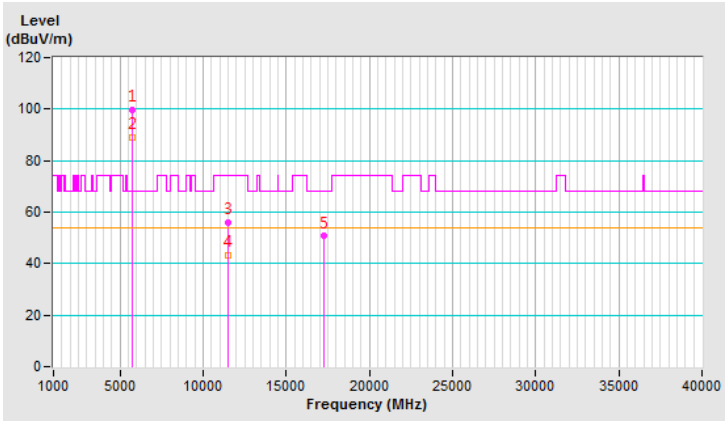


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 151：5.755 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	23℃	量 測 場 地 濕 度 ：	67%RH
測 試 日 期 ：	109 年 1 月 22 日	測 試 者 ：	柯其宗

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5755.00	108.7 PK			2.58 V	246	105.4	3.3
2	*5755.00	96.3 AV			2.58 V	246	93.0	3.3
3	11510.00	56.8 PK	74.0	-17.2	1.65 V	1	44.3	12.5
4	11510.00	44.0 AV	54.0	-10.0	1.65 V	1	31.5	12.5
5	#17265.00	51.7 PK	68.2	-16.5	2.00 V	80	35.1	16.6
6	23020.00	-	-	-	-	-	-	-
7	#28775.00	-	-	-	-	-	-	-
8	#34530.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

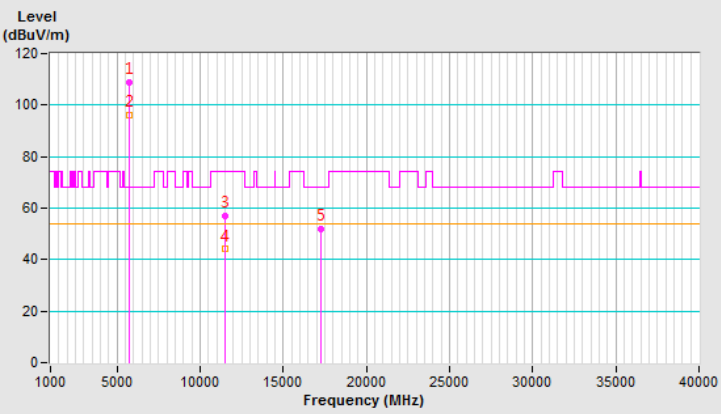


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 159：5.795 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	23℃	量 測 場 地 濕 度 ：	67%RH
測 試 日 期 ：	109 年 1 月 22 日	測 試 者 ：	柯其宗

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5795.00	98.1 PK			2.81 H	246	94.6	3.5
2	*5795.00	88.2 AV			2.81 H	246	84.7	3.5
3	11590.00	55.7 PK	74.0	-18.3	1.07 H	162	43.4	12.3
4	11590.00	43.5 AV	54.0	-10.5	1.07 H	162	31.2	12.3
5	#17385.00	50.8 PK	68.2	-17.4	2.75 H	49	34.3	16.5
6	#23180.00	-	-	-	-	-	-	-
7	#28975.00	-	-	-	-	-	-	-
8	#34770.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

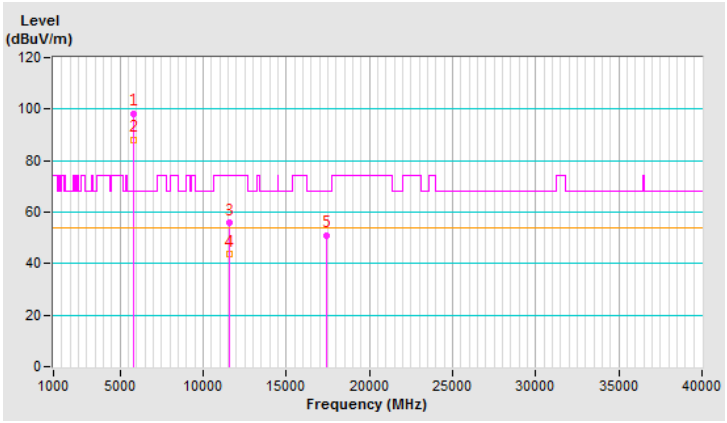


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 159：5.795 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	23℃	量 測 場 地 濕 度 ：	67%RH
測 試 日 期 ：	109 年 1 月 22 日	測 試 者 ：	柯其宗

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5795.00	106.4 PK			3.14 V	224	102.9	3.5
2	*5795.00	96.2 AV			3.14 V	224	92.7	3.5
3	11590.00	55.9 PK	74.0	-18.1	1.61 V	19	43.6	12.3
4	11590.00	43.2 AV	54.0	-10.8	1.61 V	19	30.9	12.3
5	#17385.00	51.8 PK	68.2	-16.4	1.96 V	85	35.3	16.5
6	#23180.00	-	-	-	-	-	-	-
7	#28975.00	-	-	-	-	-	-	-
8	#34770.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

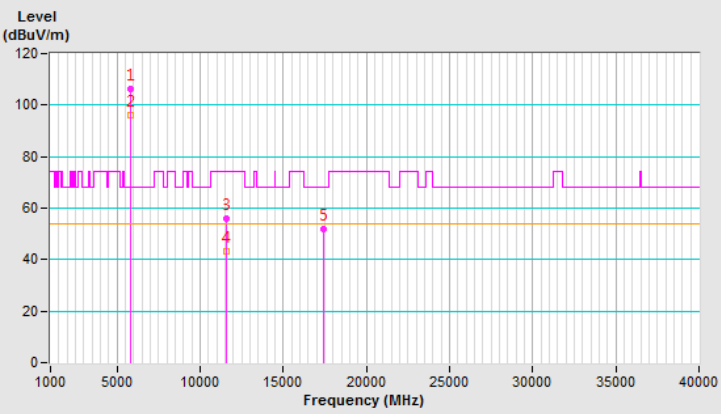


802.11ax (HE80)

操作模式 ：	發射	調變技術 ：	OFDMA
基本波頻率 ：	CH 42：5.21 GHz	測試儀器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=3kHz
量測場地溫度 ：	23℃	量測場地濕度 ：	67%RH
測試日期 ：	109 年 1 月 22 日	測試者 ：	柯其宗

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	65.2 PK	74.0	-8.8	2.55 H	150	62.2	3.0
2	5150.00	48.4 AV	54.0	-5.6	2.55 H	150	45.4	3.0
3	*5210.00	97.0 PK			2.55 H	150	94.3	2.7
4	*5210.00	83.8 AV			2.55 H	150	81.1	2.7
5	5350.00	52.6 PK	74.0	-21.4	2.55 H	150	50.0	2.6
6	5350.00	39.3 AV	54.0	-14.7	2.55 H	150	36.7	2.6
7	#10420.00	56.4 PK	68.2	-11.8	1.00 H	150	44.1	12.3
8	15630.00	50.4 PK	74.0	-23.6	2.71 H	36	37.7	12.7
9	15630.00	38.1 AV	54.0	-15.9	2.71 H	36	25.4	12.7
10	20840.00	-	-	-	-	-	-	-
11	#26050.00	-	-	-	-	-	-	-
12	31260.00	-	-	-	-	-	-	-
13	36470.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

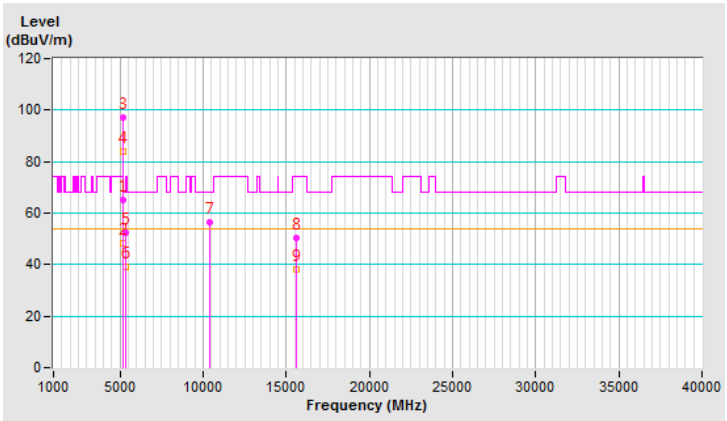


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 42：5.21 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=3kHz
量 測 場 地 溫 度 ：	23℃	量 測 場 地 濕 度 ：	67%RH
測 試 日 期 ：	109 年 1 月 22 日	測 試 者 ：	柯其宗

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	70.7 PK	74.0	-3.3	2.60 V	236	67.7	3.0
2	5150.00	53.7 AV	54.0	-0.3	2.60 V	236	50.7	3.0
3	*5210.00	102.6 PK			2.60 V	236	99.9	2.7
4	*5210.00	89.5 AV			2.60 V	236	86.8	2.7
5	5350.00	53.5 PK	74.0	-20.5	2.60 V	236	50.9	2.6
6	5350.00	40.7 AV	54.0	-13.3	2.60 V	236	38.1	2.6
7	#10420.00	56.4 PK	68.2	-11.8	1.59 V	19	44.1	12.3
8	15630.00	51.9 PK	74.0	-22.1	2.01 V	100	39.2	12.7
9	15630.00	37.4 AV	54.0	-16.6	2.01 V	100	24.7	12.7
10	20840.00	-	-	-	-	-	-	-
11	#26050.00	-	-	-	-	-	-	-
12	31260.00	-	-	-	-	-	-	-
13	36470.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

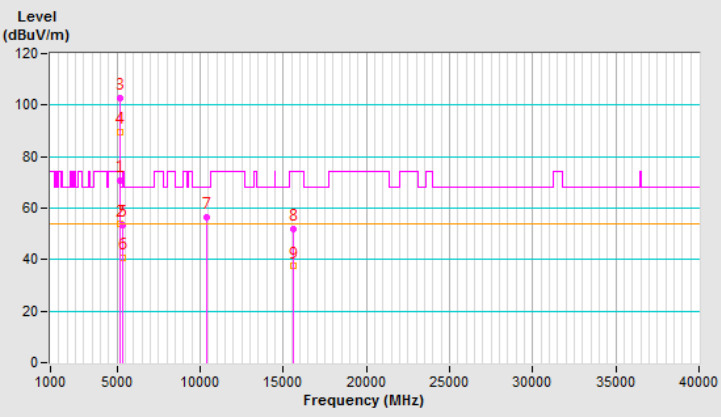


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 58：5.29 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=3kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	71%RH
測 試 日 期 ：	109 年 2 月 28 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	52.3 PK	74.0	-21.7	2.79 H	152	49.3	3.0
2	5150.00	36.9 AV	54.0	-17.1	2.79 H	152	33.9	3.0
3	*5290.00	90.6 PK			2.79 H	152	88.2	2.4
4	*5290.00	79.9 AV			2.79 H	152	77.5	2.4
5	5350.00	65.2 PK	74.0	-8.8	2.79 H	152	62.6	2.6
6	5350.00	49.6 AV	54.0	-4.4	2.79 H	152	47.0	2.6
7	#10580.00	41.7 PK	68.2	-26.5	3.31 H	196	29.2	12.5
8	15870.00	44.8 PK	74.0	-29.2	1.74 H	165	32.9	11.9
9	15870.00	33.9 AV	54.0	-20.1	1.74 H	165	22.0	11.9
10	21160.00	-	-	-	-	-	-	-
11	#26450.00	-	-	-	-	-	-	-
12	31740.00	-	-	-	-	-	-	-
13	#37030.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

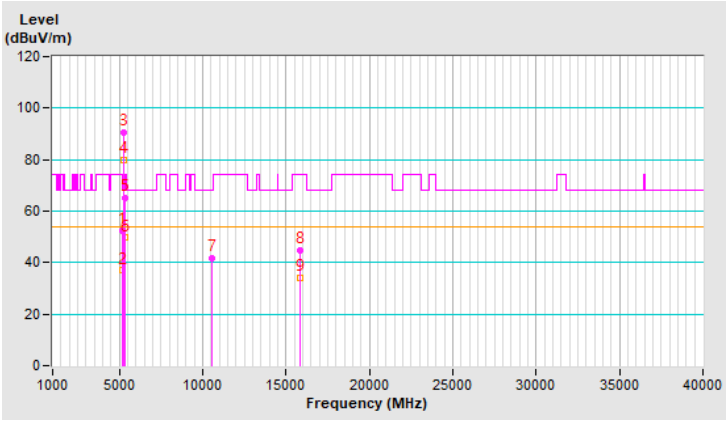


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 58：5.29 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=3kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	71%RH
測 試 日 期 ：	109 年 2 月 28 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	54.9 PK	74.0	-19.1	2.73 V	227	51.9	3.0
2	5150.00	40.4 AV	54.0	-13.6	2.73 V	227	37.4	3.0
3	*5290.00	101.2 PK			2.73 V	227	98.8	2.4
4	*5290.00	88.3 AV			2.73 V	227	85.9	2.4
5	5350.00	69.4 PK	74.0	-4.6	2.73 V	227	66.8	2.6
6	5350.00	53.7 AV	54.0	-0.3	2.73 V	227	51.1	2.6
7	#10580.00	42.5 PK	68.2	-25.7	2.77 V	176	30.0	12.5
8	15870.00	44.4 PK	74.0	-29.6	3.64 V	179	32.5	11.9
9	15870.00	33.5 AV	54.0	-20.5	3.64 V	179	21.6	11.9
10	21160.00	-	-	-	-	-	-	-
11	#26450.00	-	-	-	-	-	-	-
12	31740.00	-	-	-	-	-	-	-
13	#37030.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

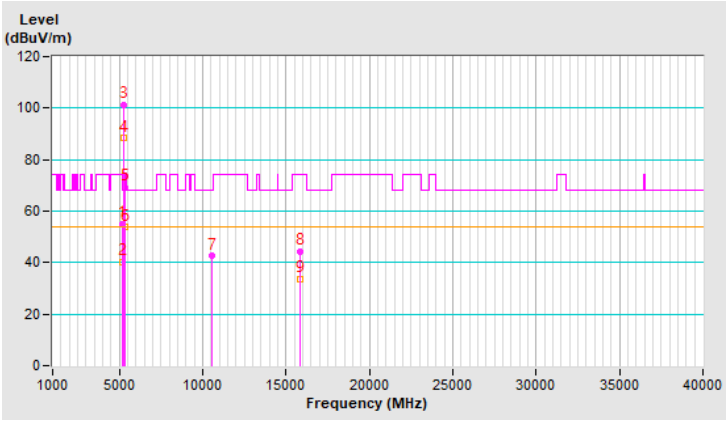


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 106：5.53 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=3kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	71%RH
測 試 日 期 ：	109 年 2 月 28 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	63.0 PK	74.0	-11.0	2.87 H	148	60.0	3.0
2	5460.00	44.7 AV	54.0	-9.3	2.87 H	148	41.7	3.0
3	#5470.00	65.7 PK	68.2	-2.5	2.87 H	148	62.6	3.1
4	*5530.00	89.8 PK			2.87 H	148	86.8	3.0
5	*5530.00	78.4 AV			2.87 H	148	75.4	3.0
6	#5725.00	49.8 PK	68.2	-18.4	2.87 H	148	46.5	3.3
7	11060.00	42.2 PK	74.0	-31.8	3.33 H	194	29.8	12.4
8	11060.00	29.3 AV	54.0	-24.7	3.33 H	194	16.9	12.4
9	#16590.00	44.7 PK	68.2	-23.5	1.81 H	170	30.3	14.4
10	22120.00	-	-	-	-	-	-	-
11	#27650.00	-	-	-	-	-	-	-
12	#33180.00	-	-	-	-	-	-	-
13	38710.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

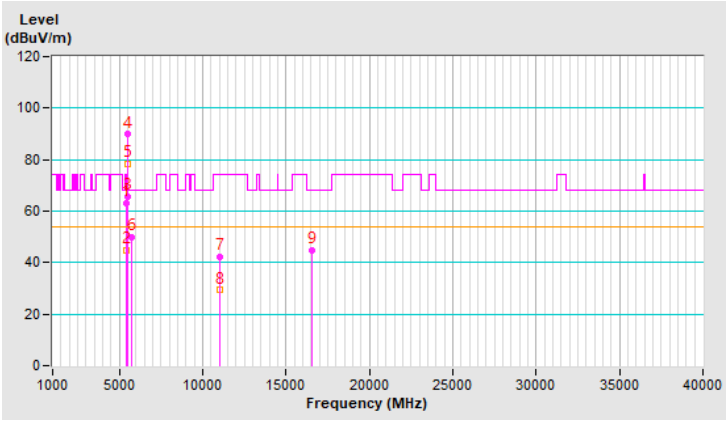


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 106：5.53 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=3kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	71%RH
測 試 日 期 ：	109 年 2 月 28 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	66.2 PK	74.0	-7.8	3.45 V	219	63.2	3.0
2	5460.00	48.4 AV	54.0	-5.6	3.45 V	219	45.4	3.0
3	#5470.00	68.0 PK	68.2	-0.2	3.45 V	219	64.9	3.1
4	*5530.00	100.9 PK			3.45 V	219	97.9	3.0
5	*5530.00	87.6 AV			3.45 V	219	84.6	3.0
6	#5725.00	50.6 PK	68.2	-17.6	3.45 V	219	47.3	3.3
7	11060.00	42.5 PK	74.0	-31.5	2.78 V	203	30.1	12.4
8	11060.00	29.4 AV	54.0	-24.6	2.78 V	203	17.0	12.4
9	#16590.00	44.4 PK	68.2	-23.8	3.57 V	156	30.0	14.4
10	22120.00	-	-	-	-	-	-	-
11	#27650.00	-	-	-	-	-	-	-
12	#33180.00	-	-	-	-	-	-	-
13	38710.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

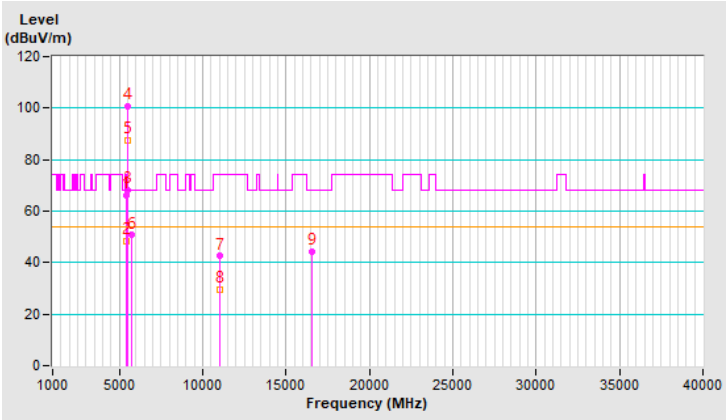


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 122：5.61 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=3kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	71%RH
測 試 日 期 ：	109 年 2 月 28 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5610.00	93.3 PK			2.85 H	152	90.3	3.0
2	*5610.00	82.5 AV			2.85 H	152	79.5	3.0
3	#5725.00	66.4 PK	68.2	-1.8	2.85 H	152	63.1	3.3
4	11220.00	41.6 PK	74.0	-32.4	3.43 H	195	29.1	12.5
5	11220.00	28.6 AV	54.0	-25.4	3.43 H	195	16.1	12.5
6	#16830.00	45.2 PK	68.2	-23.0	1.81 H	189	30.3	14.9
7	22440.00	-	-	-	-	-	-	-
8	#28050.00	-	-	-	-	-	-	-
9	#33660.00	-	-	-	-	-	-	-
10	39270.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

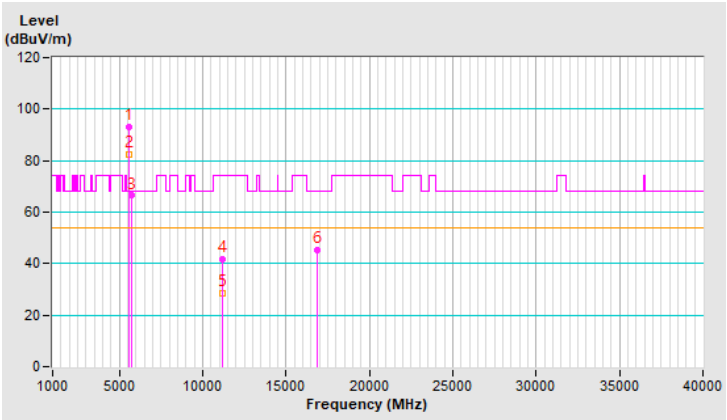


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 122：5.61 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=3kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	71%RH
測 試 日 期 ：	109 年 2 月 28 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5610.00	104.6 PK			3.65 V	347	101.6	3.0
2	*5610.00	92.3 AV			3.65 V	347	89.3	3.0
3	#5725.00	68.1 PK	68.2	-0.1	3.65 V	347	64.8	3.3
4	11220.00	42.8 PK	74.0	-31.2	2.75 V	193	30.3	12.5
5	11220.00	29.7 AV	54.0	-24.3	2.75 V	193	17.2	12.5
6	#16830.00	43.6 PK	68.2	-24.6	3.60 V	166	28.7	14.9
7	22440.00	-	-	-	-	-	-	-
8	#28050.00	-	-	-	-	-	-	-
9	#33660.00	-	-	-	-	-	-	-
10	39270.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

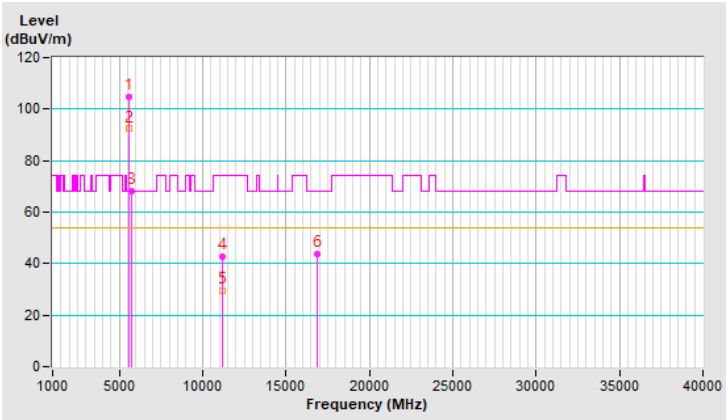


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 138：5.69 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=3kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	71%RH
測 試 日 期 ：	109 年 2 月 28 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	54.3 PK	74.0	-19.7	2.85 H	126	51.3	3.0
2	5460.00	42.0 AV	54.0	-12.0	2.85 H	126	39.0	3.0
3	#5470.00	54.7 PK	68.2	-13.5	2.85 H	126	51.6	3.1
4	*5690.00	94.6 PK			2.85 H	126	91.4	3.2
5	*5690.00	84.2 AV			2.85 H	126	81.0	3.2
6	#5850.00	61.9 PK	68.2	-6.3	2.85 H	126	58.2	3.7
7	11380.00	41.9 PK	74.0	-32.1	3.37 H	203	29.0	12.9
8	11380.00	28.9 AV	54.0	-25.1	3.37 H	203	16.0	12.9
9	#17070.00	44.4 PK	68.2	-23.8	1.79 H	174	28.3	16.1
10	22760.00	-	-	-	-	-	-	-
11	#28450.00	-	-	-	-	-	-	-
12	#34140.00	-	-	-	-	-	-	-
13	39830.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

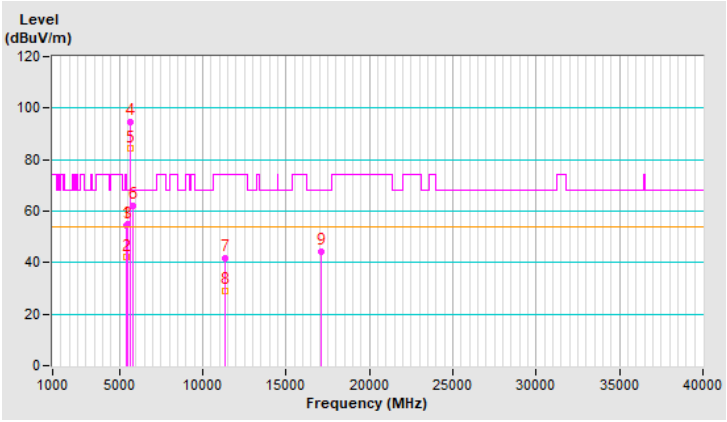


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 138：5.69 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=3kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	71%RH
測 試 日 期 ：	109 年 2 月 28 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	58.7 PK	74.0	-15.3	3.63 V	240	55.7	3.0
2	5460.00	45.8 AV	54.0	-8.2	3.63 V	240	42.8	3.0
3	#5470.00	59.8 PK	68.2	-8.4	3.63 V	240	56.7	3.1
4	*5690.00	105.5 PK			3.63 V	240	102.3	3.2
5	*5690.00	93.3 AV			3.63 V	240	90.1	3.2
6	#5850.00	65.5 PK	68.2	-2.7	3.63 V	240	61.8	3.7
7	11380.00	42.8 PK	74.0	-31.2	2.75 V	194	29.9	12.9
8	11380.00	29.5 AV	54.0	-24.5	2.75 V	194	16.6	12.9
9	#17070.00	44.1 PK	68.2	-24.1	3.57 V	178	28.0	16.1
10	22760.00	-	-	-	-	-	-	-
11	#28450.00	-	-	-	-	-	-	-
12	#34140.00	-	-	-	-	-	-	-
13	39830.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

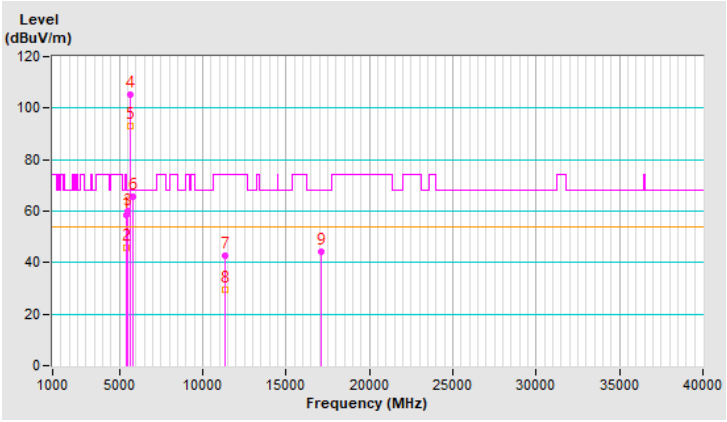


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 155：5.775 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=3kHz
量 測 場 地 溫 度 ：	23℃	量 測 場 地 濕 度 ：	67%RH
測 試 日 期 ：	109 年 1 月 22 日	測 試 者 ：	柯其宗

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5775.00	96.2 PK			3.14 H	219	92.8	3.4
2	*5775.00	85.2 AV			3.14 H	219	81.8	3.4
3	11550.00	56.0 PK	74.0	-18.0	1.03 H	147	43.6	12.4
4	11550.00	43.8 AV	54.0	-10.2	1.03 H	147	31.4	12.4
5	#17325.00	50.7 PK	68.2	-17.5	2.80 H	37	34.0	16.7
6	23100.00	-	-	-	-	-	-	-
7	#28875.00	-	-	-	-	-	-	-
8	#34650.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

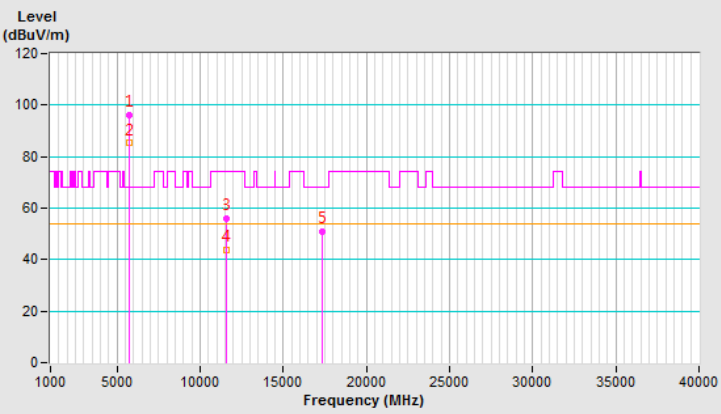


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 155：5.775 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=3kHz
量 測 場 地 溫 度 ：	23℃	量 測 場 地 濕 度 ：	67%RH
測 試 日 期 ：	109 年 1 月 22 日	測 試 者 ：	柯其宗

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5775.00	104.9 PK			2.60 V	247	101.5	3.4
2	*5775.00	93.0 AV			2.60 V	247	89.6	3.4
3	11550.00	56.2 PK	74.0	-17.8	1.61 V	5	43.8	12.4
4	11550.00	43.5 AV	54.0	-10.5	1.61 V	5	31.1	12.4
5	#17325.00	51.2 PK	68.2	-17.0	1.99 V	71	34.5	16.7
6	23100.00	-	-	-	-	-	-	-
7	#28875.00	-	-	-	-	-	-	-
8	#34650.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

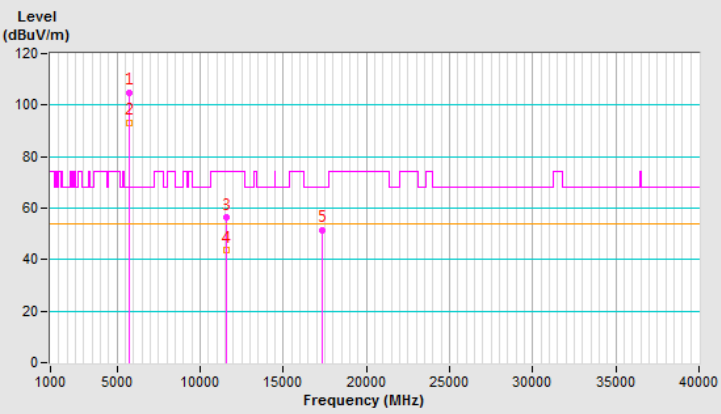


4.11.2 接收諧波

操 作 模 式 ：	接收		
基 本 波 頻 率 ：	CH 149：5.745 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=3MHz
量 測 場 地 溫 度 ：	23℃	量 測 場 地 濕 度 ：	67%RH
測 試 日 期 ：	109 年 1 月 22 日	測 試 者 ：	柯其宗

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3856.67	36.2 PK	74.0	-37.8	1.63 H	291	36.1	0.1
2	3856.67	29.6 AV	54.0	-24.4	1.63 H	291	29.5	0.1
3	7713.33	44.7 PK	74.0	-29.3	2.77 H	149	36.8	7.9
4	7713.33	33.9 AV	54.0	-20.1	2.77 H	149	26.0	7.9
5	11570.00	54.2 PK	74.0	-19.8	2.91 H	264	42.0	12.2
6	11570.00	41.5 AV	54.0	-12.5	2.91 H	264	29.3	12.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

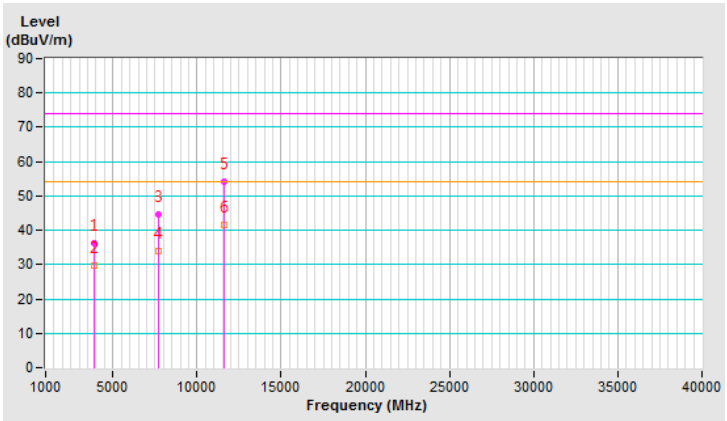


操 作 模 式 ：	接收		
基 本 波 頻 率 ：	CH 149：5.745 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=3MHz
量 測 場 地 溫 度 ：	23℃	量 測 場 地 濕 度 ：	67%RH
測 試 日 期 ：	109 年 1 月 22 日	測 試 者 ：	柯其宗

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3856.67	37.0 PK	74.0	-37.0	2.29 V	66	36.9	0.1
2	3856.67	30.8 AV	54.0	-23.2	2.29 V	66	30.7	0.1
3	7713.33	45.2 PK	74.0	-28.8	2.01 V	129	37.3	7.9
4	7713.33	34.2 AV	54.0	-19.8	2.01 V	129	26.3	7.9
5	11570.00	53.3 PK	74.0	-20.7	1.25 V	216	41.1	12.2
6	11570.00	41.2 AV	54.0	-12.8	1.25 V	216	29.0	12.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

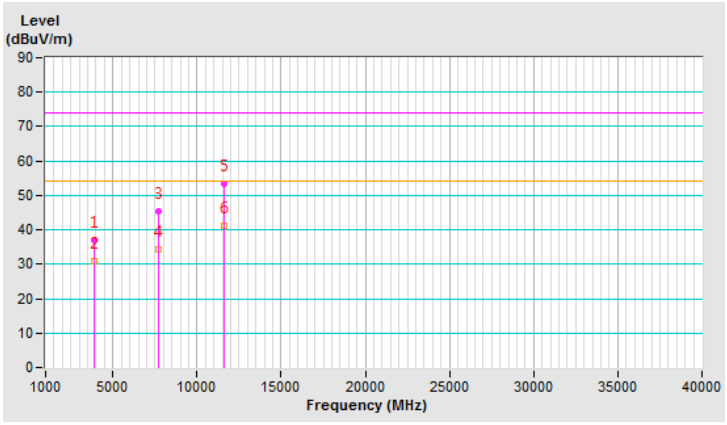

4.11.3 其它不必要之訊號


802.11ax (HE40)

操 作 模 式 ：	發射接收	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 159：5.795 GHz	測 試 儀 器 ：	(QP) RB=120kHz
量測場地溫度：	22℃	量測場地濕度：	68%RH
測 試 日 期 ：	109 年 1 月 17 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	36.95	35.1 QP	40.0	-4.9	1.00 H	84	43.5	-8.4
2	79.46	35.8 QP	40.0	-4.2	1.50 H	109	48.3	-12.5
3	124.88	27.2 QP	43.5	-16.3	1.00 H	69	36.2	-9.0
4	199.07	30.5 QP	43.5	-13.0	1.50 H	151	40.9	-10.4
5	236.74	24.3 QP	46.0	-21.7	2.00 H	303	33.0	-8.7
6	323.99	37.9 QP	46.0	-8.1	1.00 H	98	43.4	-5.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30MHz~1000MHz.
5. The emission levels were very low against the limit of frequency range 9kHz~30MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

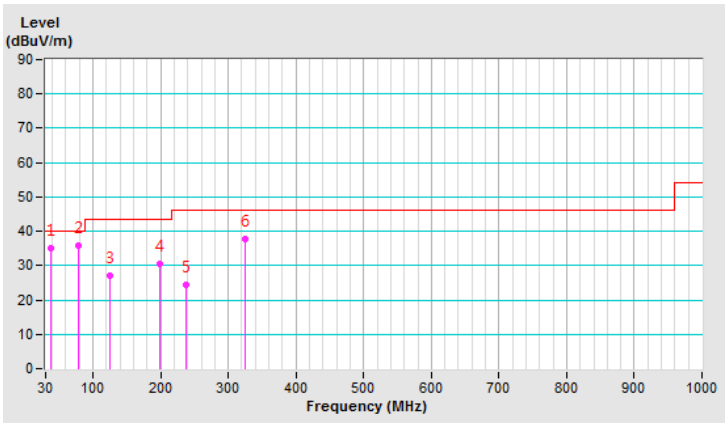


操 作 模 式 ：	發射接收	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 159：5.795 GHz	測 試 儀 器 ：	(QP) RB=120kHz
量測場地溫度：	22℃	量測場地濕度：	68%RH
測 試 日 期 ：	109 年 1 月 17 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	39.85	36.4 QP	40.0	-3.6	1.00 V	37	44.6	-8.2
2	51.82	37.0 QP	40.0	-3.0	1.00 V	204	44.8	-7.8
3	105.76	31.3 QP	43.5	-12.2	1.00 V	172	42.3	-11.0
4	137.34	27.2 QP	43.5	-16.3	1.00 V	360	34.9	-7.7
5	229.31	24.4 QP	46.0	-21.6	2.00 V	222	33.9	-9.5
6	325.23	35.8 QP	46.0	-10.2	1.00 V	72	41.2	-5.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30MHz~1000MHz.
5. The emission levels were very low against the limit of frequency range 9kHz~30MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

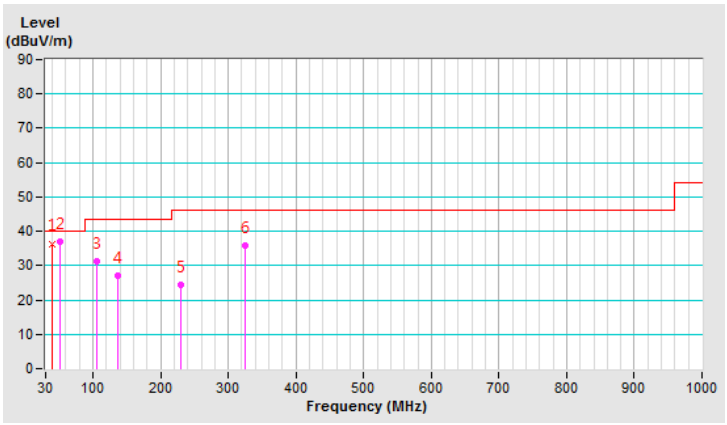

4.12 量測結果 (模式 7)

4.12.1 發射諧波


802.11a

操 作 模 式 ：	發射	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 36：5.18 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=10Hz
量 測 場 地 溫 度 ：	23℃	量 測 場 地 濕 度 ：	67%RH
測 試 日 期 ：	109 年 1 月 21 日	測 試 者 ：	柯其宗

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	67.7 PK	74.0	-6.3	1.52 H	39	64.7	3.0
2	5150.00	48.4 AV	54.0	-5.6	1.52 H	39	45.4	3.0
3	*5180.00	117.7 PK			1.52 H	39	114.8	2.9
4	*5180.00	108.2 AV			1.52 H	39	105.3	2.9
5	#10360.00	45.9 PK	68.2	-22.3	4.00 H	180	33.9	12.0
6	15540.00	43.1 PK	74.0	-30.9	1.59 H	201	30.1	13.0
7	15540.00	35.0 AV	54.0	-19.0	1.59 H	201	22.0	13.0
8	20720.00	-	-	-	-	-	-	-
9	#25900.00	-	-	-	-	-	-	-
10	#31080.00	-	-	-	-	-	-	-
11	#36260.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

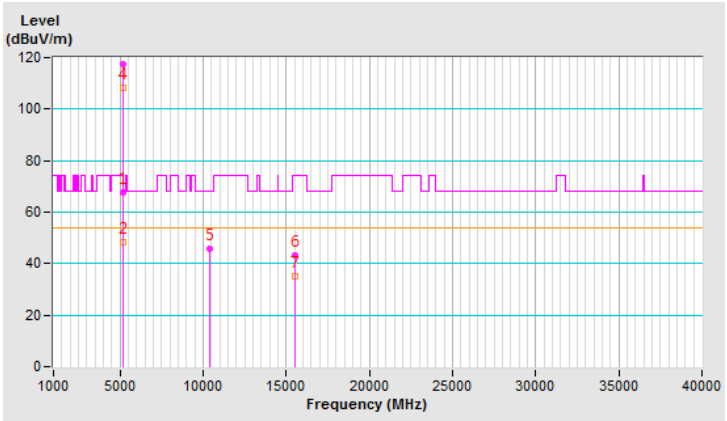


操 作 模 式 ：	發射	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 36：5.18 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=10Hz
量 測 場 地 溫 度 ：	23℃	量 測 場 地 濕 度 ：	67%RH
測 試 日 期 ：	109 年 1 月 21 日	測 試 者 ：	柯其宗

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	72.9 PK	74.0	-1.1	1.55 V	357	69.9	3.0
2	5150.00	53.2 AV	54.0	-0.8	1.55 V	357	50.2	3.0
3	*5180.00	119.1 PK			1.56 V	332	116.2	2.9
4	*5180.00	110.1 AV			1.56 V	332	107.2	2.9
5	#10360.00	45.9 PK	68.2	-22.3	3.87 V	191	33.9	12.0
6	15540.00	44.8 PK	74.0	-29.2	3.24 V	165	31.8	13.0
7	15540.00	36.7 AV	54.0	-17.3	3.24 V	165	23.7	13.0
8	20720.00	-	-	-	-	-	-	-
9	#25900.00	-	-	-	-	-	-	-
10	#31080.00	-	-	-	-	-	-	-
11	#36260.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

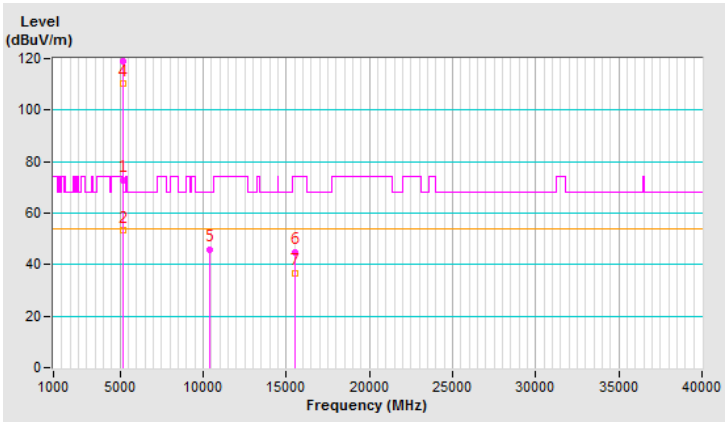


操 作 模 式 ：	發射	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 40：5.2 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=10Hz
量 測 場 地 溫 度 ：	23℃	量 測 場 地 濕 度 ：	67%RH
測 試 日 期 ：	109 年 1 月 21 日	測 試 者 ：	柯其宗

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	69.2 PK	74.0	-4.8	1.42 H	33	66.2	3.0
2	5150.00	49.0 AV	54.0	-5.0	1.42 H	33	46.0	3.0
3	*5200.00	121.8 PK			1.42 H	33	119.0	2.8
4	*5200.00	112.0 AV			1.42 H	33	109.2	2.8
5	5350.00	54.7 PK	74.0	-19.3	1.42 H	33	52.1	2.6
6	5350.00	40.0 AV	54.0	-14.0	1.42 H	33	37.4	2.6
7	#10400.00	45.6 PK	68.2	-22.6	3.95 H	178	33.5	12.1
8	15600.00	46.6 PK	74.0	-27.4	1.43 H	200	33.7	12.9
9	15600.00	38.1 AV	54.0	-15.9	1.43 H	200	25.2	12.9
10	20800.00	-	-	-	-	-	-	-
11	#26000.00	-	-	-	-	-	-	-
12	31200.00	-	-	-	-	-	-	-
13	#36400.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

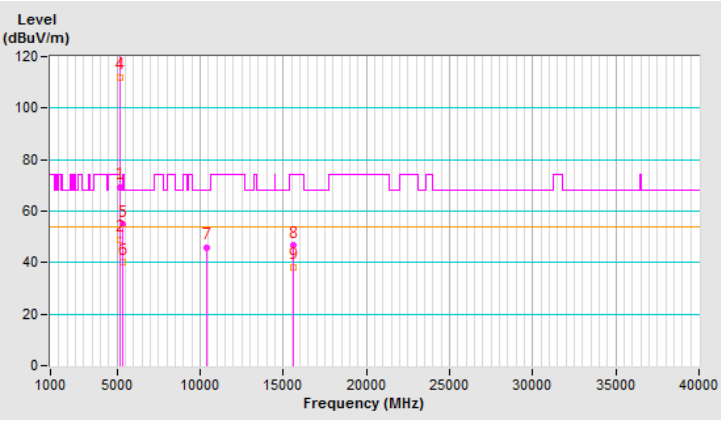


操 作 模 式 ：	發射	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 40：5.2 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=10Hz
量 測 場 地 溫 度 ：	23℃	量 測 場 地 濕 度 ：	67%RH
測 試 日 期 ：	109 年 1 月 21 日	測 試 者 ：	柯其宗

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	70.6 PK	74.0	-3.4	1.38 V	360	67.6	3.0
2	5150.00	52.2 AV	54.0	-1.8	1.38 V	360	49.2	3.0
3	*5200.00	122.1 PK			1.38 V	360	119.3	2.8
4	*5200.00	112.7 AV			1.38 V	360	109.9	2.8
5	5350.00	59.0 PK	74.0	-15.0	1.38 V	360	56.4	2.6
6	5350.00	45.4 AV	54.0	-8.6	1.38 V	360	42.8	2.6
7	#10400.00	45.8 PK	68.2	-22.4	3.98 V	162	33.7	12.1
8	15600.00	46.4 PK	74.0	-27.6	3.26 V	189	33.5	12.9
9	15600.00	37.9 AV	54.0	-16.1	3.26 V	189	25.0	12.9
10	20800.00	-	-	-	-	-	-	-
11	#26000.00	-	-	-	-	-	-	-
12	31200.00	-	-	-	-	-	-	-
13	#36400.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

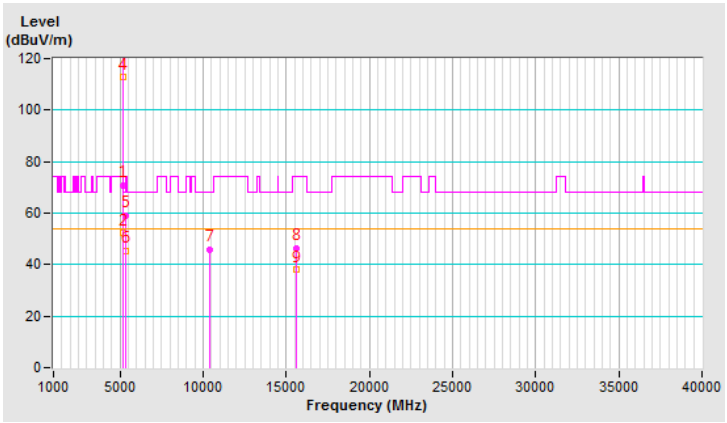


操 作 模 式 ：	發射	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 48：5.24 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=10Hz
量 測 場 地 溫 度 ：	23℃	量 測 場 地 濕 度 ：	67%RH
測 試 日 期 ：	109 年 1 月 21 日	測 試 者 ：	柯其宗

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	54.8 PK	74.0	-19.2	1.53 H	46	51.8	3.0
2	5150.00	40.0 AV	54.0	-14.0	1.53 H	46	37.0	3.0
3	*5240.00	121.5 PK			1.53 H	46	118.9	2.6
4	*5240.00	111.6 AV			1.53 H	46	109.0	2.6
5	5350.00	55.1 PK	74.0	-18.9	1.53 H	46	52.5	2.6
6	5350.00	40.3 AV	54.0	-13.7	1.53 H	46	37.7	2.6
7	#10480.00	46.5 PK	68.2	-21.7	3.95 H	189	34.0	12.5
8	15720.00	45.6 PK	74.0	-28.4	1.52 H	215	33.4	12.2
9	15720.00	37.7 AV	54.0	-16.3	1.52 H	215	25.5	12.2
10	20960.00	-	-	-	-	-	-	-
11	#26200.00	-	-	-	-	-	-	-
12	31440.00	-	-	-	-	-	-	-
13	#36680.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

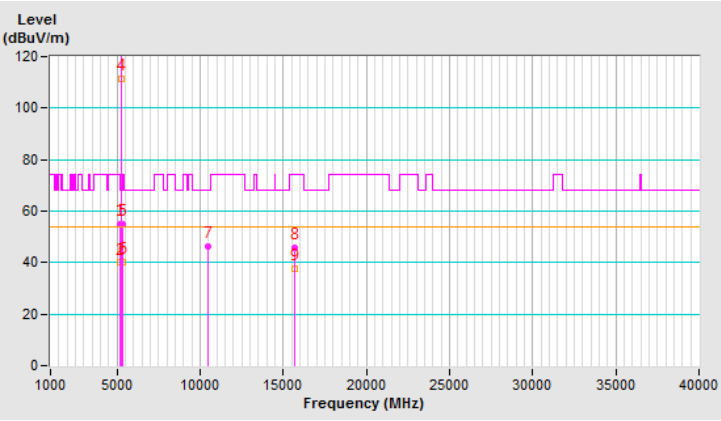


操 作 模 式 ：	發射	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 48：5.24 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=10Hz
量 測 場 地 溫 度 ：	23℃	量 測 場 地 濕 度 ：	67%RH
測 試 日 期 ：	109 年 1 月 21 日	測 試 者 ：	柯其宗

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	58.4 PK	74.0	-15.6	1.36 V	354	55.4	3.0
2	5150.00	46.1 AV	54.0	-7.9	1.36 V	354	43.1	3.0
3	*5240.00	123.5 PK			1.36 V	354	120.9	2.6
4	*5240.00	113.8 AV			1.36 V	354	111.2	2.6
5	5350.00	58.9 PK	74.0	-15.1	1.36 V	354	56.3	2.6
6	5350.00	46.5 AV	54.0	-7.5	1.36 V	354	43.9	2.6
7	#10480.00	46.1 PK	68.2	-22.1	4.00 V	189	33.6	12.5
8	15720.00	46.5 PK	74.0	-27.5	3.24 V	169	34.3	12.2
9	15720.00	37.7 AV	54.0	-16.3	3.24 V	169	25.5	12.2
10	20960.00	-	-	-	-	-	-	-
11	#26200.00	-	-	-	-	-	-	-
12	31440.00	-	-	-	-	-	-	-
13	#36680.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

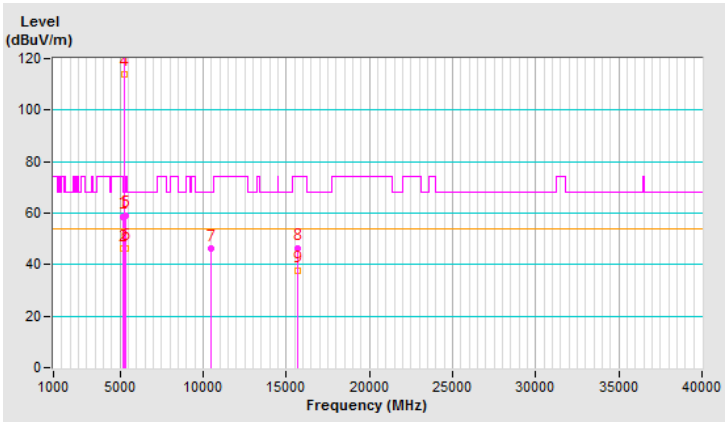


操 作 模 式 ：	發射	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 52：5.26 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=10Hz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	71%RH
測 試 日 期 ：	109 年 2 月 28 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	53.6 PK	74.0	-20.4	1.42 H	43	50.6	3.0
2	5150.00	44.3 AV	54.0	-9.7	1.42 H	43	41.3	3.0
3	*5260.00	119.7 PK			1.42 H	43	117.2	2.5
4	*5260.00	109.7 AV			1.42 H	43	107.2	2.5
5	#10520.00	48.8 PK	68.2	-19.4	3.81 H	184	36.2	12.6
6	15780.00	51.7 PK	74.0	-22.3	1.61 H	186	39.9	11.8
7	15780.00	38.9 AV	54.0	-15.1	1.61 H	186	27.1	11.8
8	21040.00	-	-	-	-	-	-	-
9	#26300.00	-	-	-	-	-	-	-
10	31560.00	-	-	-	-	-	-	-
11	#36820.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

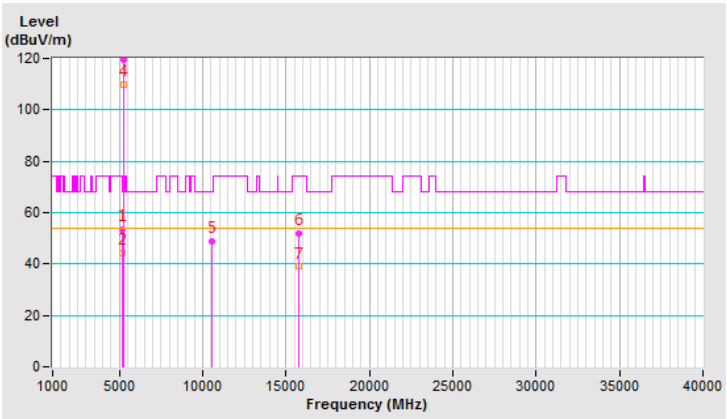


操 作 模 式 ：	發射	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 52：5.26 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=10Hz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	71%RH
測 試 日 期 ：	109 年 2 月 28 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	56.7 PK	74.0	-17.3	1.64 V	347	53.7	3.0
2	5150.00	45.2 AV	54.0	-8.8	1.64 V	347	42.2	3.0
3	*5260.00	122.6 PK			1.64 V	347	120.1	2.5
4	*5260.00	111.2 AV			1.64 V	347	108.7	2.5
5	#10520.00	48.1 PK	68.2	-20.1	3.75 V	197	35.5	12.6
6	15780.00	46.9 PK	74.0	-27.1	3.21 V	158	35.1	11.8
7	15780.00	36.2 AV	54.0	-17.8	3.21 V	158	24.4	11.8
8	21040.00	-	-	-	-	-	-	-
9	#26300.00	-	-	-	-	-	-	-
10	31560.00	-	-	-	-	-	-	-
11	#36820.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

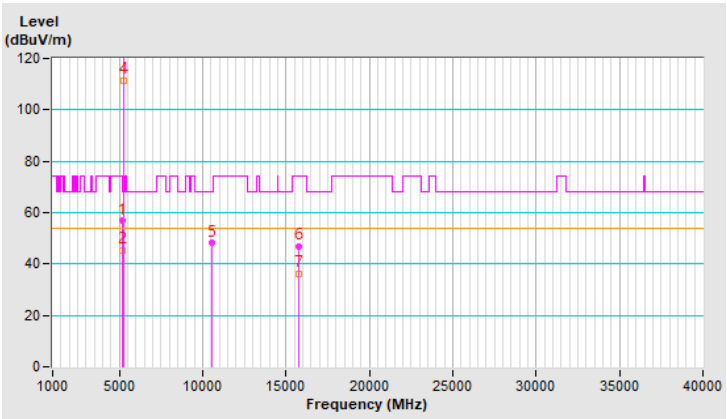


操 作 模 式 ：	發射	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 60：5.3 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=10Hz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	71%RH
測 試 日 期 ：	109 年 2 月 28 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5300.00	120.4 PK			1.50 H	52	118.0	2.4
2	*5300.00	109.7 AV			1.50 H	52	107.3	2.4
3	10600.00	48.0 PK	74.0	-26.0	3.78 H	184	35.6	12.4
4	10600.00	36.0 AV	54.0	-18.0	3.78 H	184	23.6	12.4
5	15900.00	50.7 PK	74.0	-23.3	1.65 H	187	38.6	12.1
6	15900.00	38.5 AV	54.0	-15.5	1.65 H	187	26.4	12.1
7	21200.00	-	-	-	-	-	-	-
8	#26500.00	-	-	-	-	-	-	-
9	31800.00	-	-	-	-	-	-	-
10	#37100.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

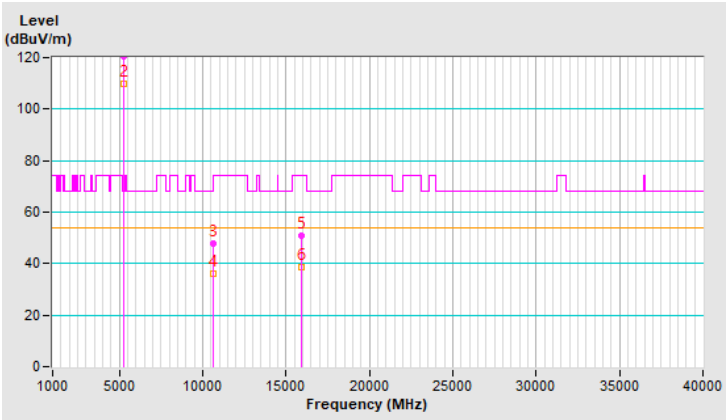


操 作 模 式 ：	發射	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 60：5.3 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=10Hz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	71%RH
測 試 日 期 ：	109 年 2 月 28 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5300.00	122.9 PK			1.41 V	355	120.5	2.4
2	*5300.00	111.7 AV			1.41 V	355	109.3	2.4
3	10600.00	47.8 PK	74.0	-26.2	3.70 V	198	35.4	12.4
4	10600.00	35.6 AV	54.0	-18.4	3.70 V	198	23.2	12.4
5	15900.00	47.7 PK	74.0	-26.3	3.20 V	142	35.6	12.1
6	15900.00	36.9 AV	54.0	-17.1	3.20 V	142	24.8	12.1
7	21200.00	-	-	-	-	-	-	-
8	#26500.00	-	-	-	-	-	-	-
9	31800.00	-	-	-	-	-	-	-
10	#37100.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

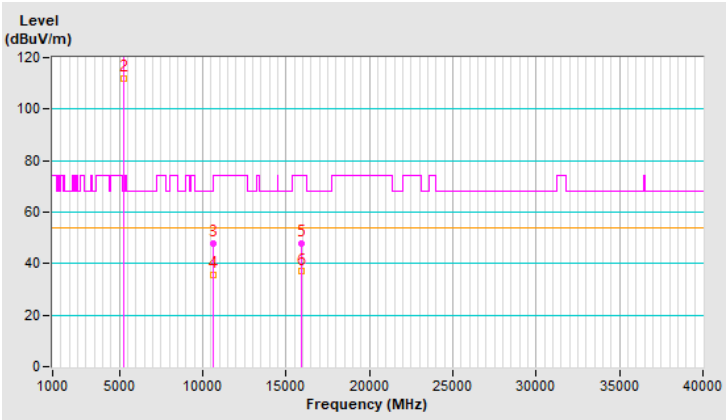


操 作 模 式 ：	發射	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 64：5.32 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=10Hz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	71%RH
測 試 日 期 ：	109 年 2 月 28 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5320.00	117.8 PK			1.56 H	37	115.3	2.5
2	*5320.00	108.4 AV			1.56 H	37	105.9	2.5
3	5350.00	64.8 PK	74.0	-9.2	1.56 H	37	62.2	2.6
4	5350.00	49.7 AV	54.0	-4.3	1.56 H	37	47.1	2.6
5	10640.00	47.2 PK	74.0	-26.8	3.81 H	196	34.8	12.4
6	10640.00	35.7 AV	54.0	-18.3	3.81 H	196	23.3	12.4
7	15960.00	50.3 PK	74.0	-23.7	1.59 H	174	37.9	12.4
8	15960.00	37.9 AV	54.0	-16.1	1.59 H	174	25.5	12.4
9	21280.00	-	-	-	-	-	-	-
10	#26600.00	-	-	-	-	-	-	-
11	#31920.00	-	-	-	-	-	-	-
12	#37240.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

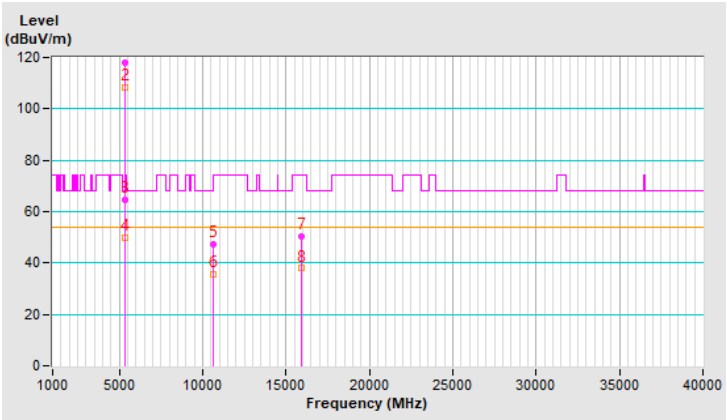


操 作 模 式 ：	發射	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 64：5.32 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=10Hz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	71%RH
測 試 日 期 ：	109 年 2 月 28 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5320.00	118.9 PK			1.52 V	339	116.4	2.5
2	*5320.00	110.4 AV			1.52 V	339	107.9	2.5
3	5350.00	69.3 PK	74.0	-4.7	1.52 V	339	66.7	2.6
4	5350.00	53.4 AV	54.0	-0.6	1.52 V	339	50.8	2.6
5	10640.00	47.3 PK	74.0	-26.7	3.76 V	186	34.9	12.4
6	10640.00	34.9 AV	54.0	-19.1	3.76 V	186	22.5	12.4
7	15960.00	47.9 PK	74.0	-26.1	3.25 V	143	35.5	12.4
8	15960.00	36.1 AV	54.0	-17.9	3.25 V	143	23.7	12.4
9	21280.00	-	-	-	-	-	-	-
10	#26600.00	-	-	-	-	-	-	-
11	#31920.00	-	-	-	-	-	-	-
12	#37240.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

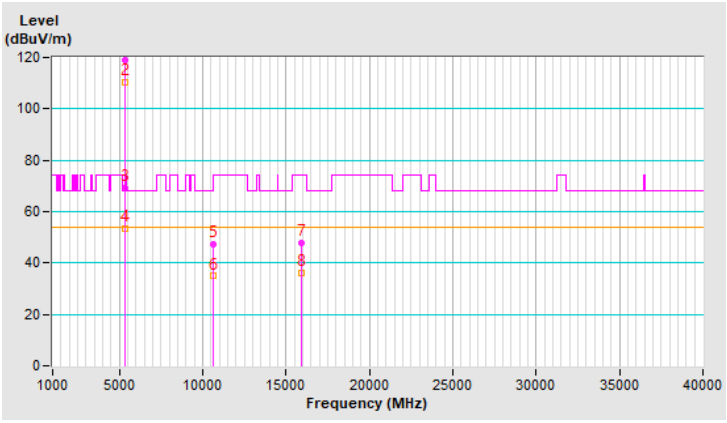


操 作 模 式 ：	發射	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 100：5.5 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=10Hz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	71%RH
測 試 日 期 ：	109 年 2 月 28 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	55.5 PK	74.0	-18.5	1.47 H	26	52.5	3.0
2	5460.00	43.8 AV	54.0	-10.2	1.47 H	26	40.8	3.0
3	#5470.00	64.9 PK	68.2	-3.3	1.47 H	26	61.8	3.1
4	*5500.00	115.5 PK			1.47 H	26	112.4	3.1
5	*5500.00	105.0 AV			1.47 H	26	101.9	3.1
6	11000.00	47.8 PK	74.0	-26.2	3.80 H	195	35.2	12.6
7	11000.00	36.0 AV	54.0	-18.0	3.80 H	195	23.4	12.6
8	#16500.00	50.2 PK	68.2	-18.0	1.51 H	200	36.6	13.6
9	#22000.00	-	-	-	-	-	-	-
10	#27500.00	-	-	-	-	-	-	-
11	#33000.00	-	-	-	-	-	-	-
12	#38500.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

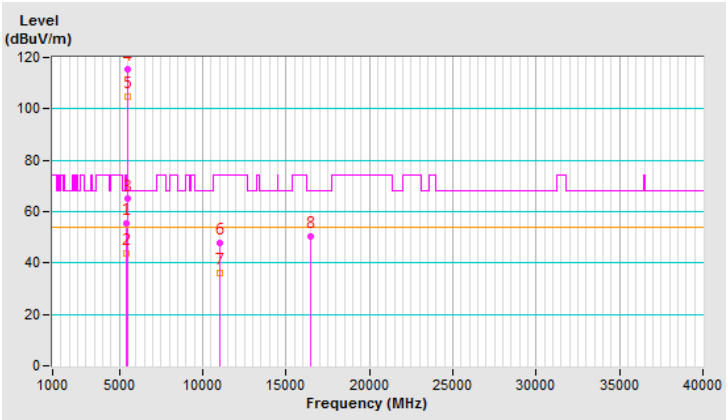


操 作 模 式 ：	發射	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 100：5.5 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=10Hz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	71%RH
測 試 日 期 ：	109 年 2 月 28 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	57.2 PK	74.0	-16.8	1.66 V	338	54.2	3.0
2	5460.00	45.2 AV	54.0	-8.8	1.66 V	338	42.2	3.0
3	#5470.00	67.6 PK	68.2	-0.6	1.66 V	338	64.5	3.1
4	*5500.00	116.6 PK			1.66 V	338	113.5	3.1
5	*5500.00	106.4 AV			1.66 V	338	103.3	3.1
6	11000.00	48.1 PK	74.0	-25.9	3.72 V	190	35.5	12.6
7	11000.00	34.9 AV	54.0	-19.1	3.72 V	190	22.3	12.6
8	#16500.00	47.6 PK	68.2	-20.6	3.25 V	167	34.0	13.6
9	#22000.00	-	-	-	-	-	-	-
10	#27500.00	-	-	-	-	-	-	-
11	#33000.00	-	-	-	-	-	-	-
12	#38500.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

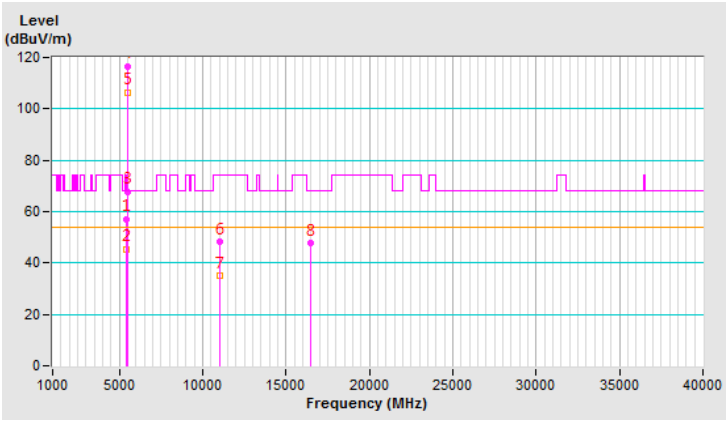


操 作 模 式 ：	發射	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 116：5.58 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=10Hz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	71%RH
測 試 日 期 ：	109 年 2 月 28 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5580.00	119.2 PK			1.45 H	51	116.2	3.0
2	*5580.00	109.9 AV			1.45 H	51	106.9	3.0
3	11160.00	48.0 PK	74.0	-26.0	3.77 H	188	35.6	12.4
4	11160.00	36.0 AV	54.0	-18.0	3.77 H	188	23.6	12.4
5	#16740.00	50.2 PK	68.2	-18.0	1.52 H	214	35.4	14.8
6	22320.00	-	-	-	-	-	-	-
7	#27900.00	-	-	-	-	-	-	-
8	#33480.00	-	-	-	-	-	-	-
9	39060.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

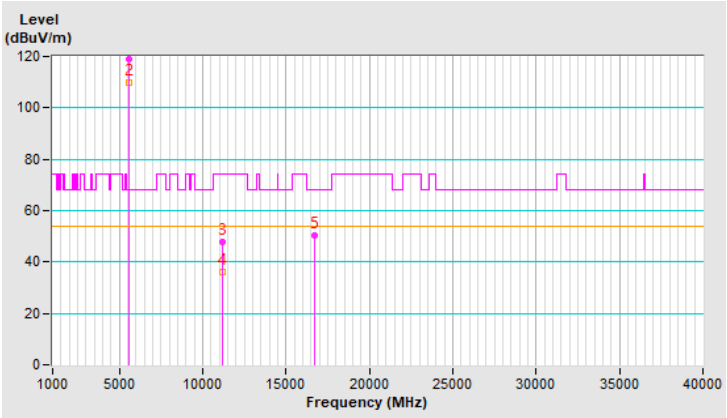


操 作 模 式 ：	發射	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 116：5.58 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=10Hz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	71%RH
測 試 日 期 ：	109 年 2 月 28 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5580.00	121.1 PK			1.39 V	349	118.1	3.0
2	*5580.00	111.6 AV			1.39 V	349	108.6	3.0
3	11160.00	47.8 PK	74.0	-26.2	3.79 V	187	35.4	12.4
4	11160.00	35.9 AV	54.0	-18.1	3.79 V	187	23.5	12.4
5	#16740.00	47.7 PK	68.2	-20.5	3.31 V	159	32.9	14.8
6	22320.00	-	-	-	-	-	-	-
7	#27900.00	-	-	-	-	-	-	-
8	#33480.00	-	-	-	-	-	-	-
9	39060.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

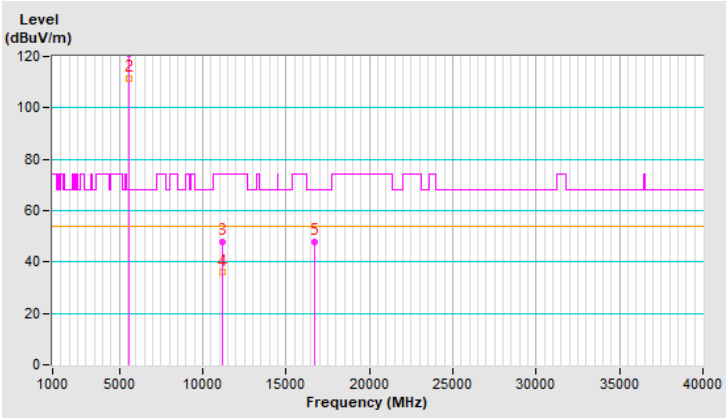


操 作 模 式 ：	發射	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 140：5.7 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=10Hz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	71%RH
測 試 日 期 ：	109 年 2 月 28 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5700.00	114.9 PK			1.56 H	26	111.7	3.2
2	*5700.00	104.3 AV			1.56 H	26	101.1	3.2
3	#5725.00	64.7 PK	68.2	-3.5	1.56 H	26	61.4	3.3
4	11400.00	47.1 PK	74.0	-26.9	3.92 H	188	34.1	13.0
5	11400.00	35.3 AV	54.0	-18.7	3.92 H	188	22.3	13.0
6	#17100.00	49.7 PK	68.2	-18.5	1.64 H	177	33.4	16.3
7	22800.00	-	-	-	-	-	-	-
8	#28500.00	-	-	-	-	-	-	-
9	#34200.00	-	-	-	-	-	-	-
10	39900.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

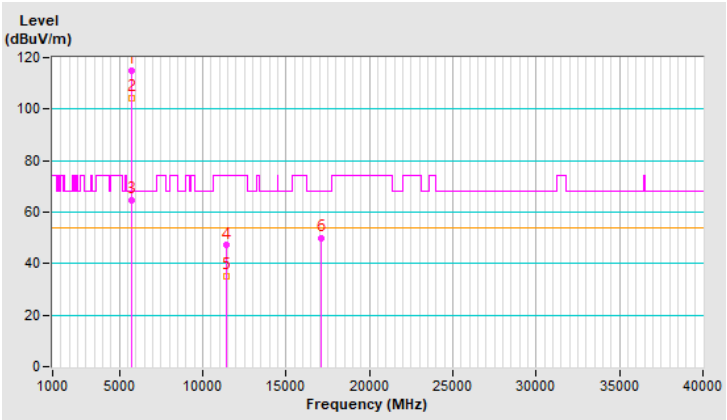


操 作 模 式 ：	發射	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 140：5.7 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=10Hz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	71%RH
測 試 日 期 ：	109 年 2 月 28 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5700.00	116.4 PK			1.67 V	344	113.2	3.2
2	*5700.00	105.9 AV			1.67 V	344	102.7	3.2
3	#5725.00	67.9 PK	68.2	-0.3	1.67 V	344	64.6	3.3
4	11400.00	47.6 PK	74.0	-26.4	3.84 V	197	34.6	13.0
5	11400.00	34.5 AV	54.0	-19.5	3.84 V	197	21.5	13.0
6	#17100.00	47.9 PK	68.2	-20.3	3.19 V	137	31.6	16.3
7	22800.00	-	-	-	-	-	-	-
8	#28500.00	-	-	-	-	-	-	-
9	#34200.00	-	-	-	-	-	-	-
10	39900.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

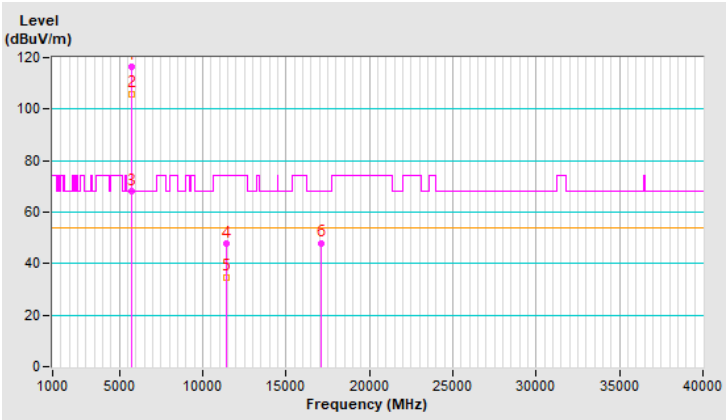


操 作 模 式 ：	發射	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 144：5.72 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=10Hz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	71%RH
測 試 日 期 ：	109 年 2 月 28 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	55.4 PK	74.0	-18.6	1.61 H	43	52.4	3.0
2	5460.00	41.0 AV	54.0	-13.0	1.61 H	43	38.0	3.0
3	#5470.00	55.8 PK	68.2	-12.4	1.61 H	43	52.7	3.1
4	*5720.00	118.8 PK			1.61 H	43	115.6	3.2
5	*5720.00	109.5 AV			1.61 H	43	106.3	3.2
6	#5850.00	55.4 PK	68.2	-12.8	1.61 H	43	51.7	3.7
7	11440.00	48.6 PK	74.0	-25.4	3.95 H	176	35.8	12.8
8	11440.00	36.5 AV	54.0	-17.5	3.95 H	176	23.7	12.8
9	#17160.00	50.8 PK	68.2	-17.4	1.58 H	186	34.2	16.6
10	22880.00	-	-	-	-	-	-	-
11	#28600.00	-	-	-	-	-	-	-
12	#34320.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

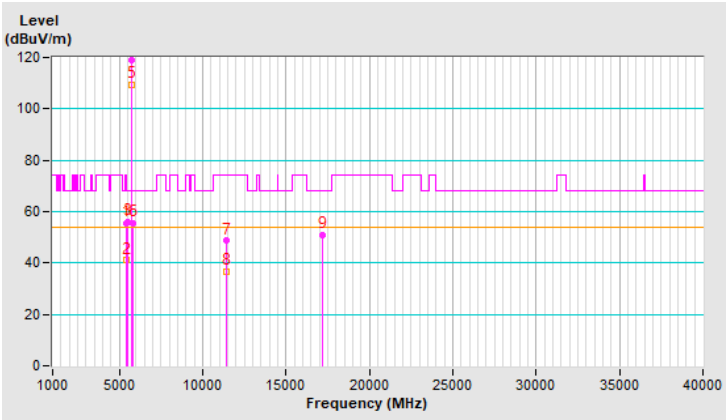


操 作 模 式 ：	發射	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 144：5.72 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=10Hz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	71%RH
測 試 日 期 ：	109 年 2 月 28 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	55.7 PK	74.0	-18.3	1.72 V	340	52.7	3.0
2	5460.00	41.9 AV	54.0	-12.1	1.72 V	340	38.9	3.0
3	#5470.00	56.3 PK	68.2	-11.9	1.72 V	340	53.2	3.1
4	*5720.00	121.4 PK			1.72 V	340	118.2	3.2
5	*5720.00	111.6 AV			1.72 V	340	108.4	3.2
6	#5850.00	55.6 PK	68.2	-12.6	1.72 V	340	51.9	3.7
7	11440.00	47.2 PK	74.0	-26.8	3.80 V	190	34.4	12.8
8	11440.00	35.6 AV	54.0	-18.4	3.80 V	190	22.8	12.8
9	#17160.00	48.2 PK	68.2	-20.0	3.34 V	159	31.6	16.6
10	22880.00	-	-	-	-	-	-	-
11	#28600.00	-	-	-	-	-	-	-
12	#34320.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

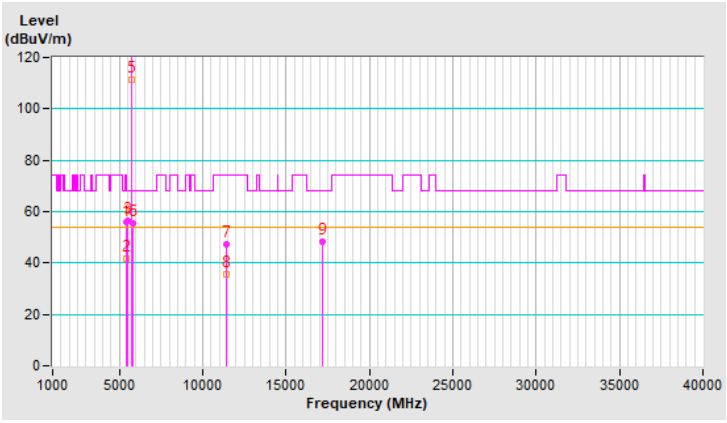


操 作 模 式 ：	發射	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 149：5.745 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=10Hz
量 測 場 地 溫 度 ：	23℃	量 測 場 地 濕 度 ：	67%RH
測 試 日 期 ：	109 年 1 月 21 日	測 試 者 ：	柯其宗

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5745.00	121.8 PK			2.17 H	308	118.5	3.3
2	*5745.00	111.6 AV			2.17 H	308	108.3	3.3
3	11490.00	53.0 PK	74.0	-21.0	1.89 H	144	40.4	12.6
4	11490.00	40.2 AV	54.0	-13.8	1.89 H	144	27.6	12.6
5	#17235.00	68.0 PK	68.2	-0.2	3.42 H	120	51.2	16.8
6	22980.00	-	-	-	-	-	-	-
7	#28725.00	-	-	-	-	-	-	-
8	#34470.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

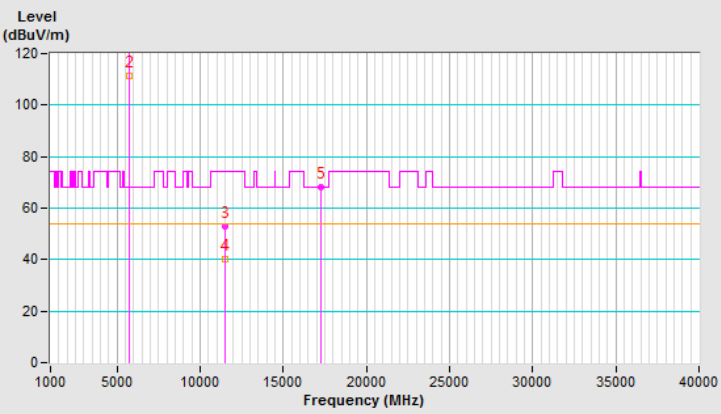


操 作 模 式 ：	發射	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 149：5.745 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=10Hz
量 測 場 地 溫 度 ：	23℃	量 測 場 地 濕 度 ：	67%RH
測 試 日 期 ：	109 年 1 月 21 日	測 試 者 ：	柯其宗

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5745.00	121.7 PK			1.27 V	353	118.4	3.3
2	*5745.00	110.1 AV			1.27 V	353	106.8	3.3
3	11490.00	52.9 PK	74.0	-21.1	3.96 V	187	40.3	12.6
4	11490.00	40.9 AV	54.0	-13.1	3.96 V	187	28.3	12.6
5	#17235.00	64.0 PK	68.2	-4.2	3.18 V	192	47.2	16.8
6	22980.00	-	-	-	-	-	-	-
7	#28725.00	-	-	-	-	-	-	-
8	#34470.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

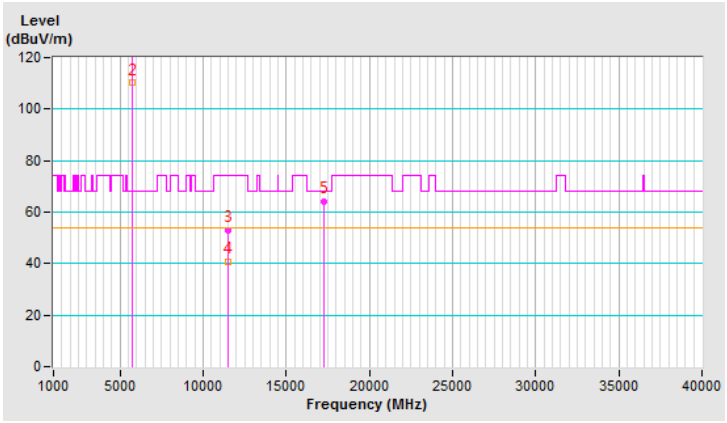


操 作 模 式 ：	發射	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 157：5.785 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=10Hz
量 測 場 地 溫 度 ：	23℃	量 測 場 地 濕 度 ：	67%RH
測 試 日 期 ：	109 年 1 月 21 日	測 試 者 ：	柯其宗

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5785.00	123.1 PK			1.96 H	316	119.7	3.4
2	*5785.00	111.5 AV			1.96 H	316	108.1	3.4
3	11570.00	52.2 PK	74.0	-21.8	1.86 H	132	40.0	12.2
4	11570.00	39.9 AV	54.0	-14.1	1.86 H	132	27.7	12.2
5	#17355.00	67.9 PK	68.2	-0.3	1.62 H	111	51.3	16.6
6	#23140.00	-	-	-	-	-	-	-
7	#28925.00	-	-	-	-	-	-	-
8	#34710.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

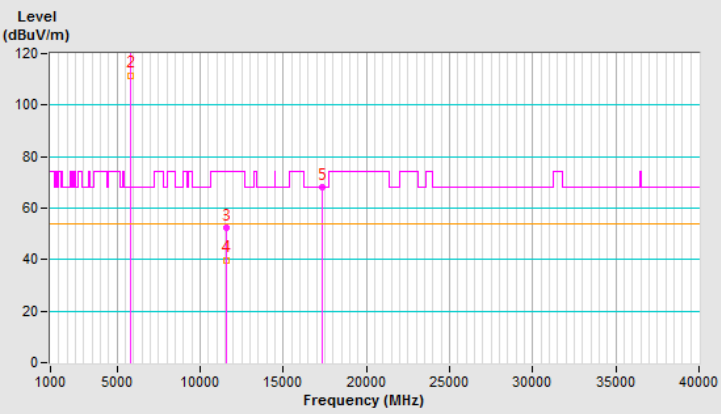


操 作 模 式 ：	發射	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 157：5.785 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=10Hz
量 測 場 地 溫 度 ：	23℃	量 測 場 地 濕 度 ：	67%RH
測 試 日 期 ：	109 年 1 月 21 日	測 試 者 ：	柯其宗

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5785.00	122.2 PK			1.33 V	358	118.8	3.4
2	*5785.00	110.7 AV			1.33 V	358	107.3	3.4
3	11570.00	52.9 PK	74.0	-21.1	3.95 V	196	40.7	12.2
4	11570.00	40.5 AV	54.0	-13.5	3.95 V	196	28.3	12.2
5	#17355.00	64.2 PK	68.2	-4.0	3.22 V	182	47.6	16.6
6	#23140.00	-	-	-	-	-	-	-
7	#28925.00	-	-	-	-	-	-	-
8	#34710.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

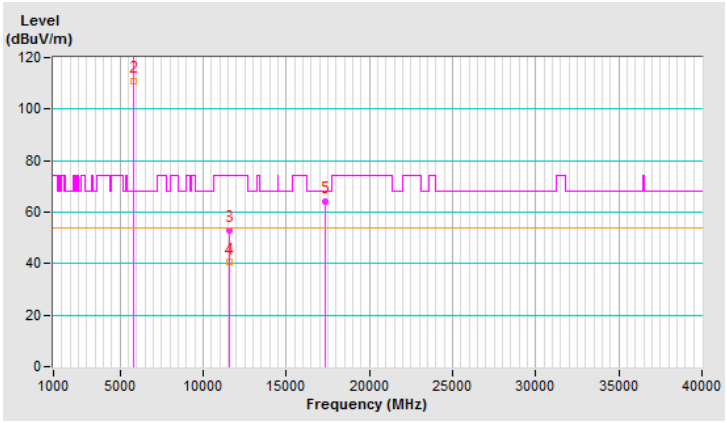


操 作 模 式 ：	發射	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 165：5.825 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=10Hz
量 測 場 地 溫 度 ：	23℃	量 測 場 地 濕 度 ：	67%RH
測 試 日 期 ：	109 年 1 月 21 日	測 試 者 ：	柯其宗

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5825.00	122.6 PK			2.01 H	321	119.0	3.6
2	*5825.00	111.2 AV			2.01 H	321	107.6	3.6
3	11650.00	53.0 PK	74.0	-21.0	1.78 H	153	40.6	12.4
4	11650.00	40.5 AV	54.0	-13.5	1.78 H	153	28.1	12.4
5	#17475.00	67.5 PK	68.2	-0.7	1.68 H	124	50.5	17.0
6	#23300.00	-	-	-	-	-	-	-
7	#29125.00	-	-	-	-	-	-	-
8	#34950.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

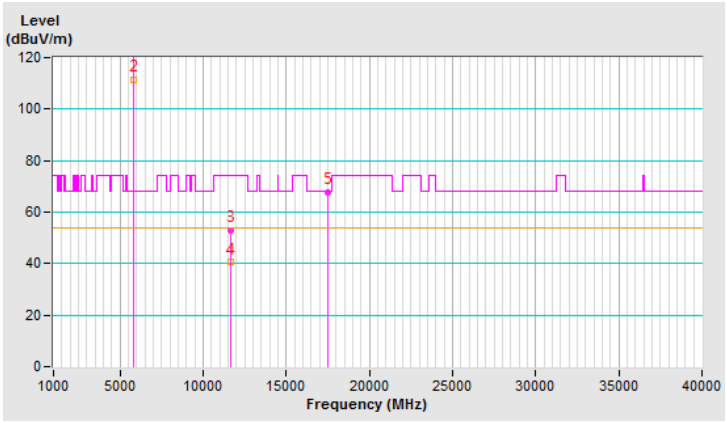


操 作 模 式 ：	發射	調 變 技 術 ：	OFDM
基 本 波 頻 率 ：	CH 165：5.825 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=10Hz
量 測 場 地 溫 度 ：	23℃	量 測 場 地 濕 度 ：	67%RH
測 試 日 期 ：	109 年 1 月 21 日	測 試 者 ：	柯其宗

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5825.00	121.6 PK			1.37 V	337	118.0	3.6
2	*5825.00	110.2 AV			1.37 V	337	106.6	3.6
3	11650.00	53.5 PK	74.0	-20.5	3.99 V	178	41.1	12.4
4	11650.00	41.0 AV	54.0	-13.0	3.99 V	178	28.6	12.4
5	#17475.00	63.9 PK	68.2	-4.3	3.28 V	172	46.9	17.0
6	#23300.00	-	-	-	-	-	-	-
7	#29125.00	-	-	-	-	-	-	-
8	#34950.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

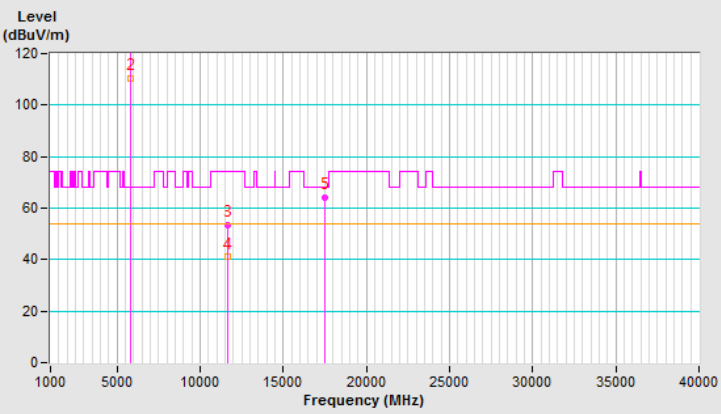


802.11ax (HE20)

操作模式：	發射	調變技術：	OFDMA
基本波頻率：	CH 36：5.18 GHz	測試儀器：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量測場地溫度：	23℃	量測場地濕度：	67%RH
測試日期：	109 年 1 月 21 日	測試者：	柯其宗

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	72.0 PK	74.0	-2.0	1.37 H	51	69.0	3.0
2	5150.00	49.0 AV	54.0	-5.0	1.37 H	51	46.0	3.0
3	*5180.00	118.9 PK			1.37 H	51	116.0	2.9
4	*5180.00	106.2 AV			1.37 H	51	103.3	2.9
5	#10360.00	45.0 PK	68.2	-23.2	3.94 H	204	33.0	12.0
6	15540.00	45.1 PK	74.0	-28.9	1.36 H	205	32.1	13.0
7	15540.00	36.9 AV	54.0	-17.1	1.36 H	205	23.9	13.0
8	20720.00	-	-	-	-	-	-	-
9	#25900.00	-	-	-	-	-	-	-
10	#31080.00	-	-	-	-	-	-	-
11	#36260.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

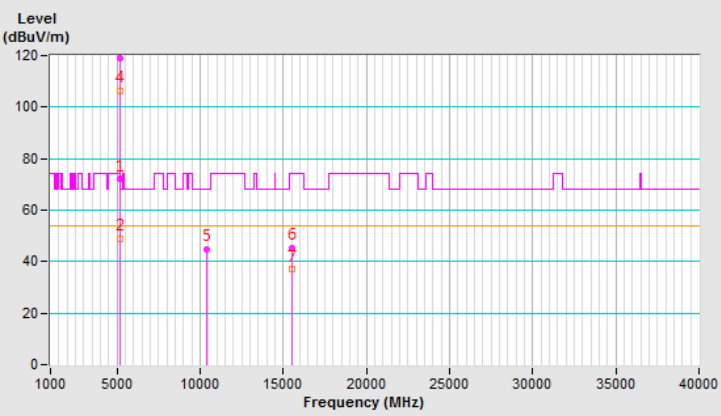


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 36：5.18 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	23℃	量 測 場 地 濕 度 ：	67%RH
測 試 日 期 ：	109 年 1 月 21 日	測 試 者 ：	柯其宗

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	73.3 PK	74.0	-0.7	1.48 V	357	70.3	3.0
2	5150.00	53.3 AV	54.0	-0.7	1.48 V	357	50.3	3.0
3	*5180.00	119.7 PK			1.48 V	357	116.8	2.9
4	*5180.00	107.0 AV			1.48 V	357	104.1	2.9
5	#10360.00	44.9 PK	68.2	-23.3	3.90 V	192	32.9	12.0
6	15540.00	45.9 PK	74.0	-28.1	3.07 V	191	32.9	13.0
7	15540.00	37.2 AV	54.0	-16.8	3.07 V	191	24.2	13.0
8	20720.00	-	-	-	-	-	-	-
9	#25900.00	-	-	-	-	-	-	-
10	#31080.00	-	-	-	-	-	-	-
11	#36260.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

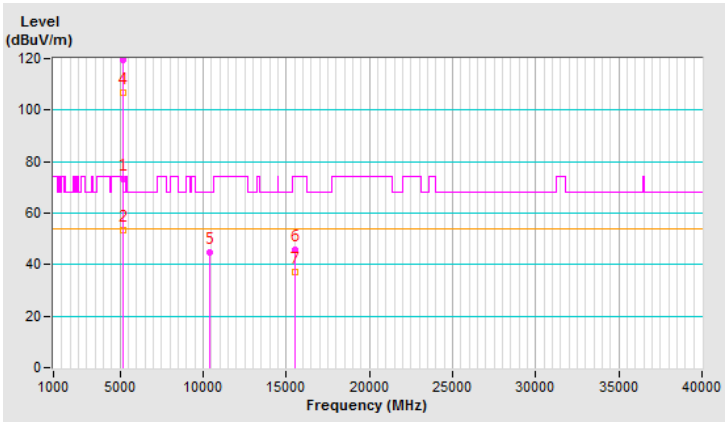


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 40：5.2 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	23℃	量 測 場 地 濕 度 ：	67%RH
測 試 日 期 ：	109 年 1 月 21 日	測 試 者 ：	柯其宗

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	69.4 PK	74.0	-4.6	1.45 H	14	66.4	3.0
2	5150.00	49.5 AV	54.0	-4.5	1.45 H	14	46.5	3.0
3	*5200.00	117.8 PK			1.45 H	14	115.0	2.8
4	*5200.00	108.6 AV			1.45 H	14	105.8	2.8
5	#10400.00	46.5 PK	68.2	-21.7	3.96 H	222	34.4	12.1
6	15600.00	45.4 PK	74.0	-28.6	1.46 H	205	32.5	12.9
7	15600.00	37.0 AV	54.0	-17.0	1.46 H	205	24.1	12.9
8	20800.00	-	-	-	-	-	-	-
9	#26000.00	-	-	-	-	-	-	-
10	31200.00	-	-	-	-	-	-	-
11	#36400.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

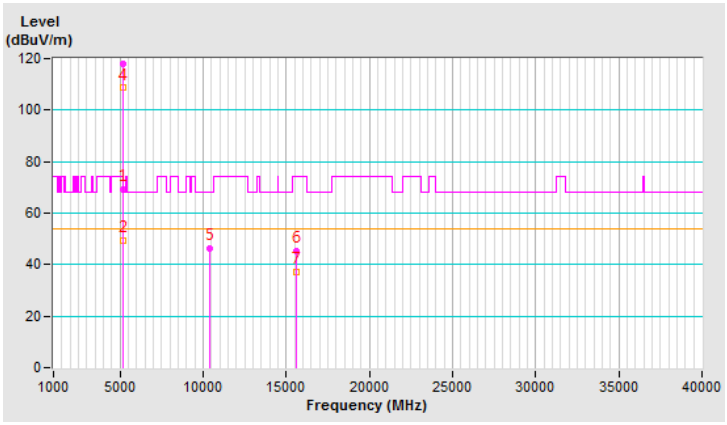


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 40：5.2 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	23℃	量 測 場 地 濕 度 ：	67%RH
測 試 日 期 ：	109 年 1 月 21 日	測 試 者 ：	柯其宗

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	73.2 PK	74.0	-0.8	1.45 V	346	70.2	3.0
2	5150.00	50.8 AV	54.0	-3.2	1.45 V	346	47.8	3.0
3	*5200.00	123.1 PK			1.45 V	346	120.3	2.8
4	*5200.00	111.1 AV			1.45 V	346	108.3	2.8
5	#10400.00	45.7 PK	68.2	-22.5	3.84 V	166	33.6	12.1
6	15600.00	47.3 PK	74.0	-26.7	3.28 V	197	34.4	12.9
7	15600.00	38.7 AV	54.0	-15.3	3.28 V	197	25.8	12.9
8	20800.00	-	-	-	-	-	-	-
9	#26000.00	-	-	-	-	-	-	-
10	31200.00	-	-	-	-	-	-	-
11	#36400.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

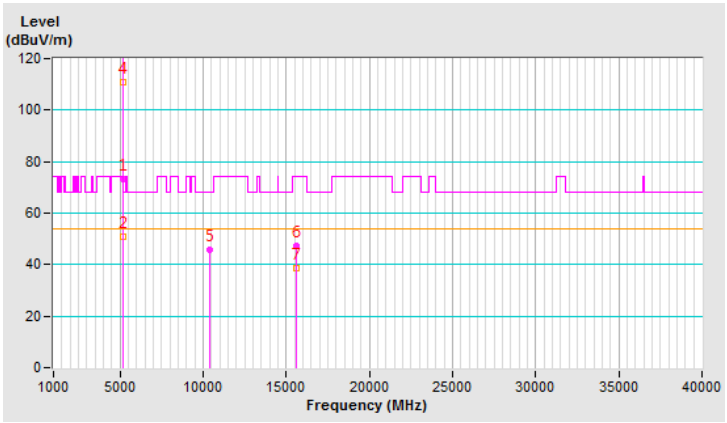


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 48：5.24 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	23℃	量 測 場 地 濕 度 ：	67%RH
測 試 日 期 ：	109 年 1 月 21 日	測 試 者 ：	柯其宗

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	55.2 PK	74.0	-18.8	1.53 H	26	52.2	3.0
2	5150.00	40.5 AV	54.0	-13.5	1.53 H	26	37.5	3.0
3	*5240.00	117.5 PK			1.53 H	26	114.9	2.6
4	*5240.00	108.4 AV			1.53 H	26	105.8	2.6
5	5350.00	54.7 PK	74.0	-19.3	1.53 H	26	52.1	2.6
6	5350.00	39.5 AV	54.0	-14.5	1.53 H	26	36.9	2.6
7	#10480.00	45.4 PK	68.2	-22.8	3.93 H	194	32.9	12.5
8	15720.00	46.8 PK	74.0	-27.2	1.44 H	220	34.6	12.2
9	15720.00	38.1 AV	54.0	-15.9	1.44 H	220	25.9	12.2
10	20960.00	-	-	-	-	-	-	-
11	#26200.00	-	-	-	-	-	-	-
12	31440.00	-	-	-	-	-	-	-
13	#36680.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

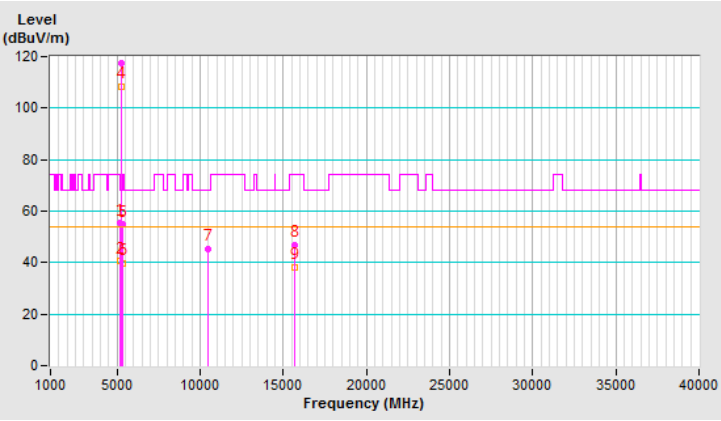


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 48：5.24 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	23℃	量 測 場 地 濕 度 ：	67%RH
測 試 日 期 ：	109 年 1 月 21 日	測 試 者 ：	柯其宗

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	57.0 PK	74.0	-17.0	1.47 V	343	54.0	3.0
2	5150.00	44.6 AV	54.0	-9.4	1.47 V	343	41.6	3.0
3	*5240.00	122.1 PK			1.47 V	343	119.5	2.6
4	*5240.00	110.5 AV			1.47 V	343	107.9	2.6
5	5350.00	56.8 PK	74.0	-17.2	1.47 V	343	54.2	2.6
6	5350.00	44.1 AV	54.0	-9.9	1.47 V	343	41.5	2.6
7	#10480.00	45.4 PK	68.2	-22.8	3.93 V	199	32.9	12.5
8	15720.00	46.4 PK	74.0	-27.6	3.20 V	180	34.2	12.2
9	15720.00	37.6 AV	54.0	-16.4	3.20 V	180	25.4	12.2
10	20960.00	-	-	-	-	-	-	-
11	#26200.00	-	-	-	-	-	-	-
12	31440.00	-	-	-	-	-	-	-
13	#36680.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

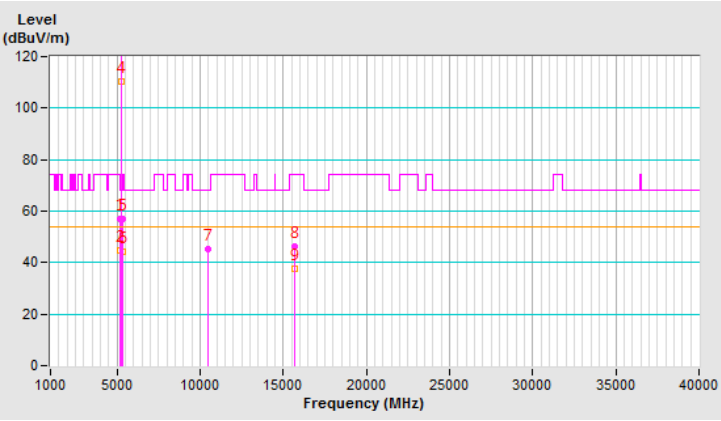


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 52：5.26 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	71%RH
測 試 日 期 ：	109 年 2 月 28 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	54.0 PK	74.0	-20.0	1.57 H	42	51.0	3.0
2	5150.00	44.3 AV	54.0	-9.7	1.57 H	42	41.3	3.0
3	*5260.00	119.5 PK			1.57 H	42	117.0	2.5
4	*5260.00	109.6 AV			1.57 H	42	107.1	2.5
5	#10520.00	48.3 PK	68.2	-19.9	3.79 H	190	35.7	12.6
6	15780.00	51.0 PK	74.0	-23.0	1.65 H	183	39.2	11.8
7	15780.00	38.6 AV	54.0	-15.4	1.65 H	183	26.8	11.8
8	21040.00	-	-	-	-	-	-	-
9	#26300.00	-	-	-	-	-	-	-
10	31560.00	-	-	-	-	-	-	-
11	#36820.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

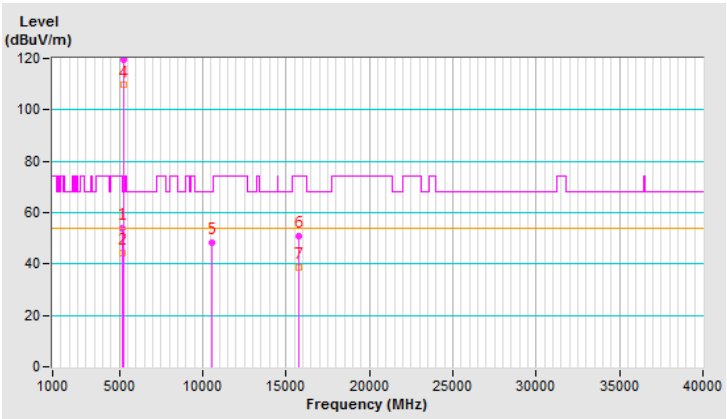


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 52：5.26 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	71%RH
測 試 日 期 ：	109 年 2 月 28 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	57.3 PK	74.0	-16.7	1.59 V	336	54.3	3.0
2	5150.00	45.5 AV	54.0	-8.5	1.59 V	336	42.5	3.0
3	*5260.00	123.2 PK			1.59 V	336	120.7	2.5
4	*5260.00	111.6 AV			1.59 V	336	109.1	2.5
5	#10520.00	48.0 PK	68.2	-20.2	3.82 V	180	35.4	12.6
6	15780.00	47.1 PK	74.0	-26.9	3.40 V	170	35.3	11.8
7	15780.00	36.2 AV	54.0	-17.8	3.40 V	170	24.4	11.8
8	21040.00	-	-	-	-	-	-	-
9	#26300.00	-	-	-	-	-	-	-
10	31560.00	-	-	-	-	-	-	-
11	#36820.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

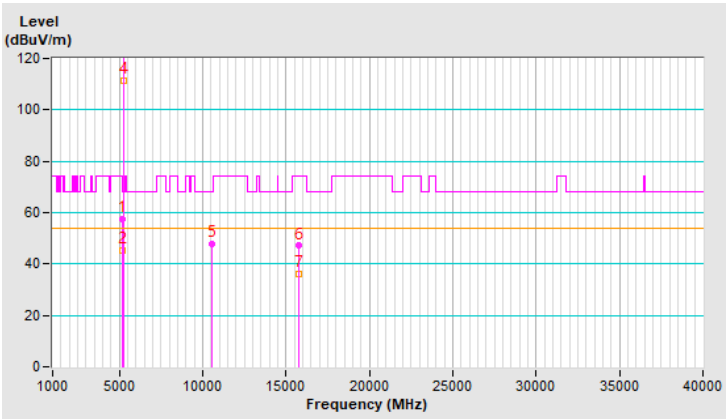


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 60：5.3 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	71%RH
測 試 日 期 ：	109 年 2 月 28 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5300.00	120.1 PK			1.57 H	15	117.7	2.4
2	*5300.00	110.2 AV			1.57 H	15	107.8	2.4
3	10600.00	48.3 PK	74.0	-25.7	3.85 H	193	35.9	12.4
4	10600.00	36.2 AV	54.0	-17.8	3.85 H	193	23.8	12.4
5	15900.00	50.6 PK	74.0	-23.4	1.63 H	185	38.5	12.1
6	15900.00	38.6 AV	54.0	-15.4	1.63 H	185	26.5	12.1
7	21200.00	-	-	-	-	-	-	-
8	#26500.00	-	-	-	-	-	-	-
9	31800.00	-	-	-	-	-	-	-
10	#37100.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

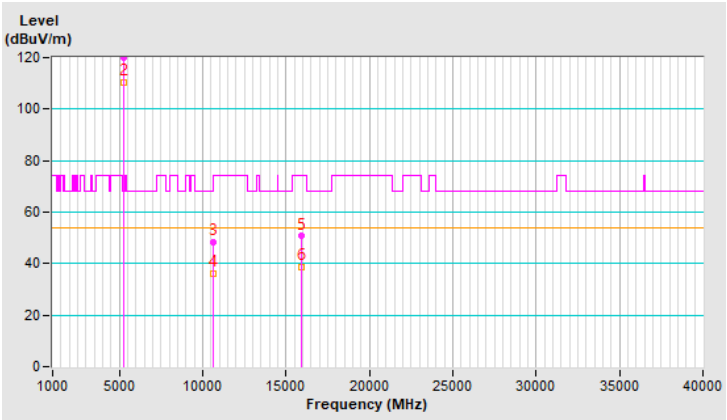


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 60：5.3 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	71%RH
測 試 日 期 ：	109 年 2 月 28 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5300.00	123.3 PK			1.60 V	331	120.9	2.4
2	*5300.00	111.8 AV			1.60 V	331	109.4	2.4
3	10600.00	47.6 PK	74.0	-26.4	3.75 V	205	35.2	12.4
4	10600.00	35.6 AV	54.0	-18.4	3.75 V	205	23.2	12.4
5	15900.00	47.8 PK	74.0	-26.2	3.30 V	164	35.7	12.1
6	15900.00	36.9 AV	54.0	-17.1	3.30 V	164	24.8	12.1
7	21200.00	-	-	-	-	-	-	-
8	#26500.00	-	-	-	-	-	-	-
9	31800.00	-	-	-	-	-	-	-
10	#37100.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

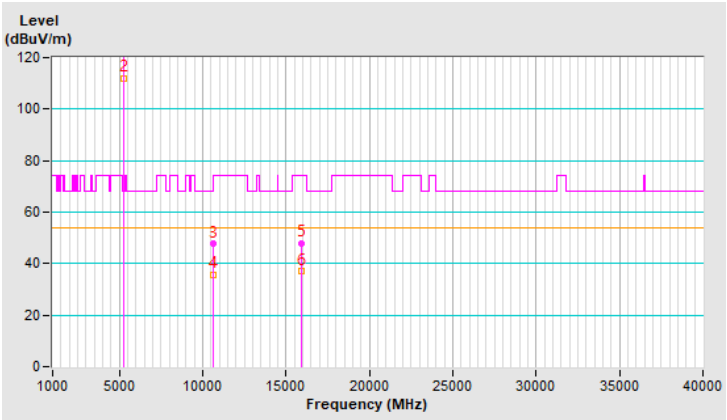


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 64：5.32 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	71%RH
測 試 日 期 ：	109 年 2 月 28 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5320.00	117.8 PK			1.50 H	30	115.3	2.5
2	*5320.00	104.6 AV			1.50 H	30	102.1	2.5
3	5350.00	64.1 PK	74.0	-9.9	1.50 H	30	61.5	2.6
4	5350.00	49.9 AV	54.0	-4.1	1.50 H	30	47.3	2.6
5	10640.00	47.3 PK	74.0	-26.7	3.73 H	179	34.9	12.4
6	10640.00	35.1 AV	54.0	-18.9	3.73 H	179	22.7	12.4
7	15960.00	48.9 PK	74.0	-25.1	1.69 H	173	36.5	12.4
8	15960.00	37.4 AV	54.0	-16.6	1.69 H	173	25.0	12.4
9	21280.00	-	-	-	-	-	-	-
10	#26600.00	-	-	-	-	-	-	-
11	#31920.00	-	-	-	-	-	-	-
12	#37240.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

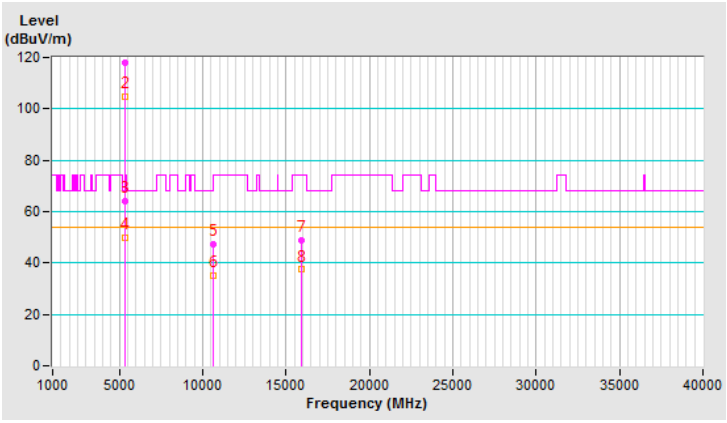


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 64：5.32 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	71%RH
測 試 日 期 ：	109 年 2 月 28 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5320.00	118.2 PK			1.48 V	354	115.7	2.5
2	*5320.00	106.7 AV			1.48 V	354	104.2	2.5
3	5350.00	73.6 PK	74.0	-0.4	1.48 V	354	71.0	2.6
4	5350.00	53.8 AV	54.0	-0.2	1.48 V	354	51.2	2.6
5	10640.00	47.8 PK	74.0	-26.2	3.71 V	176	35.4	12.4
6	10640.00	34.9 AV	54.0	-19.1	3.71 V	176	22.5	12.4
7	15960.00	48.1 PK	74.0	-25.9	3.23 V	181	35.7	12.4
8	15960.00	36.5 AV	54.0	-17.5	3.23 V	181	24.1	12.4
9	21280.00	-	-	-	-	-	-	-
10	#26600.00	-	-	-	-	-	-	-
11	#31920.00	-	-	-	-	-	-	-
12	#37240.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

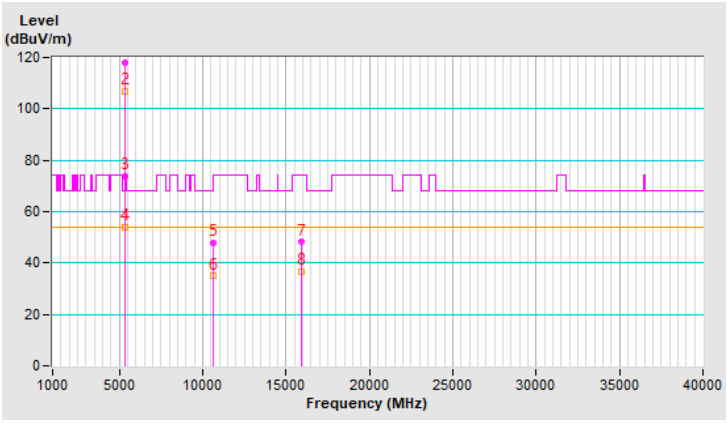


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 100：5.5 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	71%RH
測 試 日 期 ：	109 年 2 月 28 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	54.4 PK	74.0	-19.6	1.52 H	37	51.4	3.0
2	5460.00	42.4 AV	54.0	-11.6	1.52 H	37	39.4	3.0
3	#5470.00	65.3 PK	68.2	-2.9	1.52 H	37	62.2	3.1
4	*5500.00	116.1 PK			1.52 H	37	113.0	3.1
5	*5500.00	102.9 AV			1.52 H	37	99.8	3.1
6	11000.00	47.1 PK	74.0	-26.9	3.93 H	202	34.5	12.6
7	11000.00	35.0 AV	54.0	-19.0	3.93 H	202	22.4	12.6
8	#16500.00	48.9 PK	68.2	-19.3	1.71 H	183	35.3	13.6
9	#22000.00	-	-	-	-	-	-	-
10	#27500.00	-	-	-	-	-	-	-
11	#33000.00	-	-	-	-	-	-	-
12	#38500.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

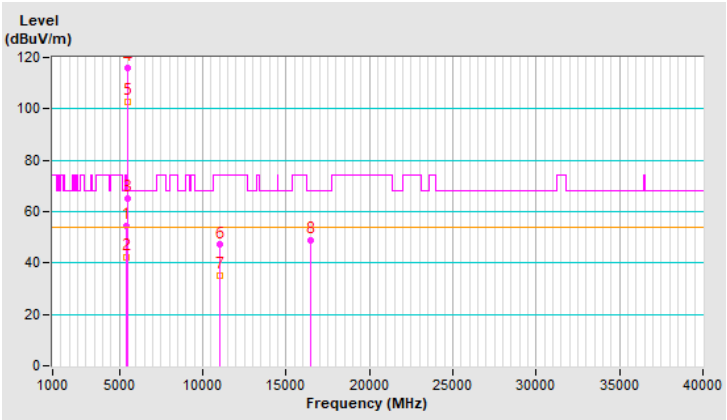


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 100：5.5 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	71%RH
測 試 日 期 ：	109 年 2 月 28 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	55.2 PK	74.0	-18.8	1.45 V	356	52.2	3.0
2	5460.00	43.8 AV	54.0	-10.2	1.45 V	356	40.8	3.0
3	#5470.00	67.5 PK	68.2	-0.7	1.45 V	356	64.4	3.1
4	*5500.00	117.7 PK			1.45 V	356	114.6	3.1
5	*5500.00	104.9 AV			1.45 V	356	101.8	3.1
6	11000.00	47.4 PK	74.0	-26.6	3.77 V	203	34.8	12.6
7	11000.00	34.2 AV	54.0	-19.8	3.77 V	203	21.6	12.6
8	#16500.00	47.4 PK	68.2	-20.8	3.33 V	162	33.8	13.6
9	#22000.00	-	-	-	-	-	-	-
10	#27500.00	-	-	-	-	-	-	-
11	#33000.00	-	-	-	-	-	-	-
12	#38500.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

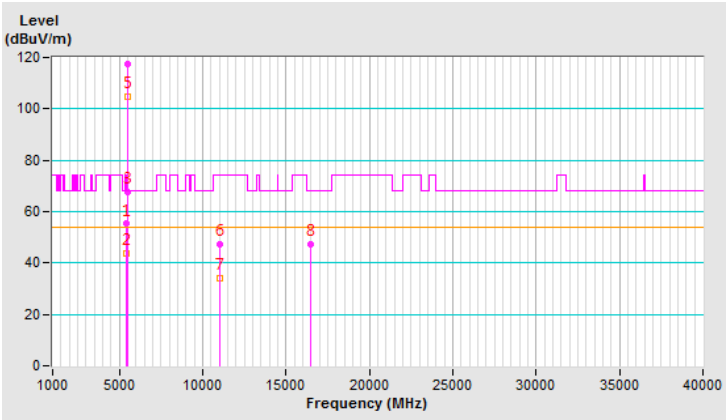


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 116：5.58 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	71%RH
測 試 日 期 ：	109 年 2 月 28 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5580.00	119.7 PK			1.54 H	28	116.7	3.0
2	*5580.00	109.9 AV			1.54 H	28	106.9	3.0
3	11160.00	48.0 PK	74.0	-26.0	3.86 H	210	35.6	12.4
4	11160.00	36.1 AV	54.0	-17.9	3.86 H	210	23.7	12.4
5	#16740.00	51.1 PK	68.2	-17.1	1.70 H	175	36.3	14.8
6	22320.00	-	-	-	-	-	-	-
7	#27900.00	-	-	-	-	-	-	-
8	#33480.00	-	-	-	-	-	-	-
9	39060.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

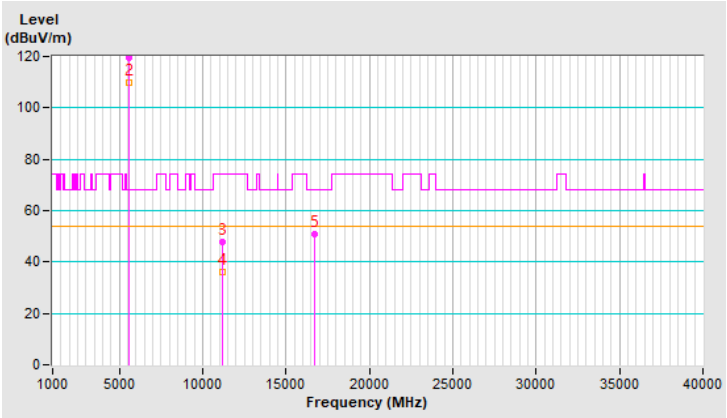


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 116：5.58 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	71%RH
測 試 日 期 ：	109 年 2 月 28 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5580.00	123.1 PK			1.35 V	347	120.1	3.0
2	*5580.00	111.6 AV			1.35 V	347	108.6	3.0
3	11160.00	47.3 PK	74.0	-26.7	3.76 V	175	34.9	12.4
4	11160.00	35.6 AV	54.0	-18.4	3.76 V	175	23.2	12.4
5	#16740.00	47.7 PK	68.2	-20.5	3.35 V	183	32.9	14.8
6	22320.00	-	-	-	-	-	-	-
7	#27900.00	-	-	-	-	-	-	-
8	#33480.00	-	-	-	-	-	-	-
9	39060.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

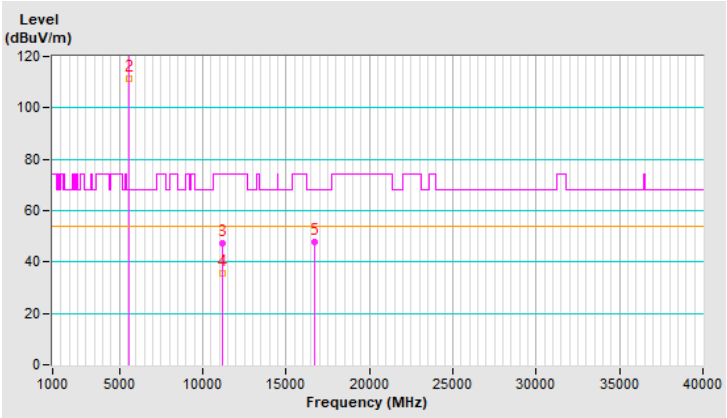


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 140：5.7 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	71%RH
測 試 日 期 ：	109 年 2 月 28 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5700.00	116.6 PK			1.64 H	56	113.4	3.2
2	*5700.00	103.7 AV			1.64 H	56	100.5	3.2
3	#5725.00	65.1 PK	68.2	-3.1	1.64 H	56	61.8	3.3
4	11400.00	47.0 PK	74.0	-27.0	3.94 H	218	34.0	13.0
5	11400.00	34.9 AV	54.0	-19.1	3.94 H	218	21.9	13.0
6	#17100.00	49.0 PK	68.2	-19.2	1.72 H	176	32.7	16.3
7	22800.00	-	-	-	-	-	-	-
8	#28500.00	-	-	-	-	-	-	-
9	#34200.00	-	-	-	-	-	-	-
10	39900.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

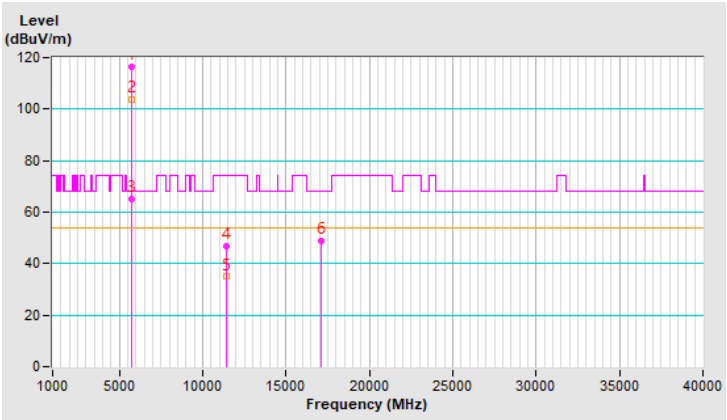


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 140：5.7 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	71%RH
測 試 日 期 ：	109 年 2 月 28 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5700.00	118.4 PK			1.55 V	344	115.2	3.2
2	*5700.00	105.5 AV			1.55 V	344	102.3	3.2
3	#5725.00	68.0 PK	68.2	-0.2	1.55 V	344	64.7	3.3
4	11400.00	47.7 PK	74.0	-26.3	3.88 V	169	34.7	13.0
5	11400.00	34.8 AV	54.0	-19.2	3.88 V	169	21.8	13.0
6	#17100.00	47.9 PK	68.2	-20.3	3.45 V	182	31.6	16.3
7	22800.00	-	-	-	-	-	-	-
8	#28500.00	-	-	-	-	-	-	-
9	#34200.00	-	-	-	-	-	-	-
10	39900.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

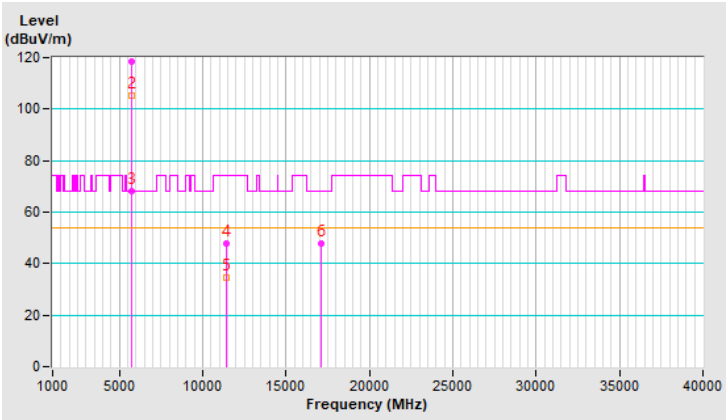


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 144：5.72 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	71%RH
測 試 日 期 ：	109 年 2 月 28 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	53.4 PK	74.0	-20.6	1.57 H	46	50.4	3.0
2	5460.00	41.3 AV	54.0	-12.7	1.57 H	46	38.3	3.0
3	#5470.00	54.2 PK	68.2	-14.0	1.57 H	46	51.1	3.1
4	*5720.00	119.1 PK			1.57 H	46	115.9	3.2
5	*5720.00	109.3 AV			1.57 H	46	106.1	3.2
6	#5850.00	54.6 PK	68.2	-13.6	1.57 H	46	50.9	3.7
7	11440.00	48.1 PK	74.0	-25.9	3.84 H	188	35.3	12.8
8	11440.00	36.2 AV	54.0	-17.8	3.84 H	188	23.4	12.8
9	#17160.00	50.7 PK	68.2	-17.5	1.64 H	182	34.1	16.6
10	22880.00	-	-	-	-	-	-	-
11	#28600.00	-	-	-	-	-	-	-
12	#34320.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

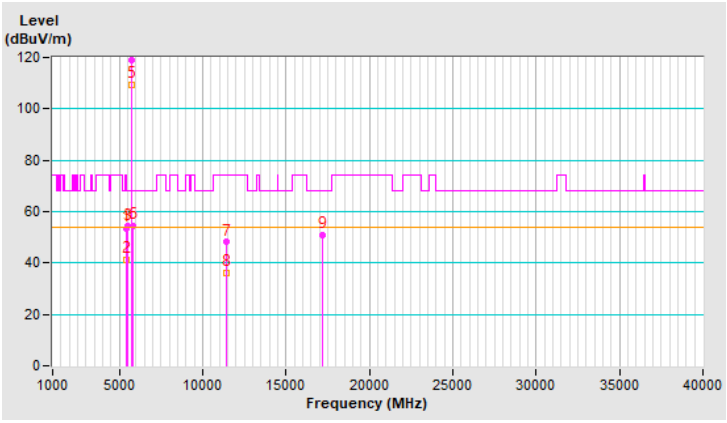


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 144：5.72 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	25℃	量 測 場 地 濕 度 ：	71%RH
測 試 日 期 ：	109 年 2 月 28 日	測 試 者 ：	楊立豪

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	57.2 PK	74.0	-16.8	1.41 V	345	54.2	3.0
2	5460.00	45.7 AV	54.0	-8.3	1.41 V	345	42.7	3.0
3	#5470.00	56.7 PK	68.2	-11.5	1.41 V	345	53.6	3.1
4	*5720.00	122.9 PK			1.41 V	345	119.7	3.2
5	*5720.00	111.4 AV			1.41 V	345	108.2	3.2
6	#5850.00	57.3 PK	68.2	-10.9	1.41 V	345	53.6	3.7
7	11440.00	47.3 PK	74.0	-26.7	3.80 V	173	34.5	12.8
8	11440.00	35.4 AV	54.0	-18.6	3.80 V	173	22.6	12.8
9	#17160.00	47.3 PK	68.2	-20.9	3.43 V	167	30.7	16.6
10	22880.00	-	-	-	-	-	-	-
11	#28600.00	-	-	-	-	-	-	-
12	#34320.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

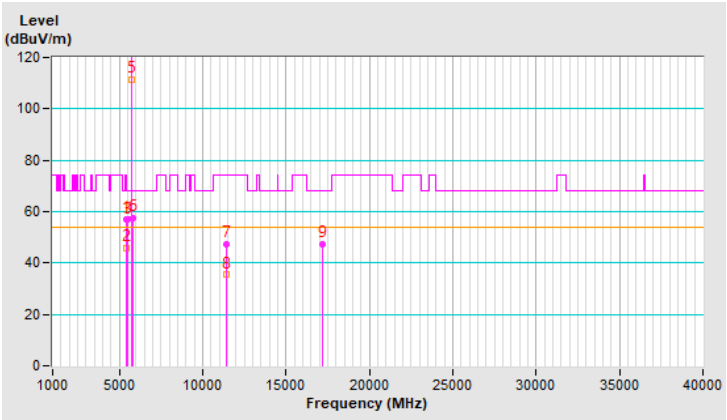


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 149：5.745 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	23℃	量 測 場 地 濕 度 ：	67%RH
測 試 日 期 ：	109 年 1 月 21 日	測 試 者 ：	柯其宗

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5745.00	122.1 PK			2.36 H	313	118.8	3.3
2	*5745.00	112.2 AV			2.36 H	313	108.9	3.3
3	11490.00	52.1 PK	74.0	-21.9	1.64 H	141	39.5	12.6
4	11490.00	41.6 AV	54.0	-12.4	1.64 H	141	29.0	12.6
5	#17235.00	67.8 PK	68.2	-0.4	3.42 H	122	51.0	16.8
6	22980.00	-	-	-	-	-	-	-
7	#28725.00	-	-	-	-	-	-	-
8	#34470.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

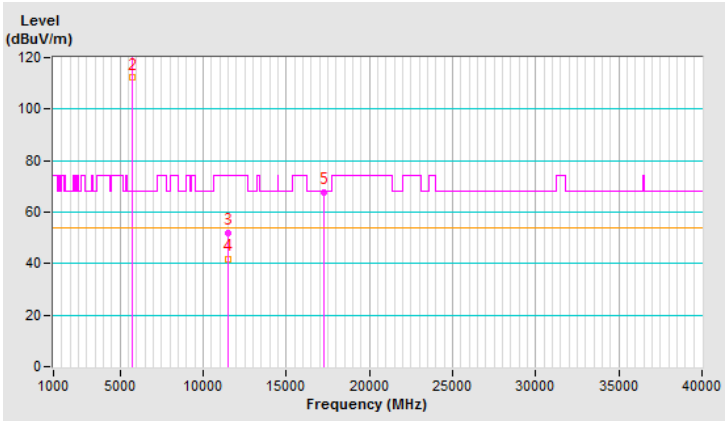


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 149：5.745 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	23℃	量 測 場 地 濕 度 ：	67%RH
測 試 日 期 ：	109 年 1 月 21 日	測 試 者 ：	柯其宗

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5745.00	120.1 PK			1.50 V	336	116.8	3.3
2	*5745.00	110.1 AV			1.50 V	336	106.8	3.3
3	11490.00	53.3 PK	74.0	-20.7	3.89 V	173	40.7	12.6
4	11490.00	41.0 AV	54.0	-13.0	3.89 V	173	28.4	12.6
5	#17235.00	63.8 PK	68.2	-4.4	3.31 V	170	47.0	16.8
6	22980.00	-	-	-	-	-	-	-
7	#28725.00	-	-	-	-	-	-	-
8	#34470.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

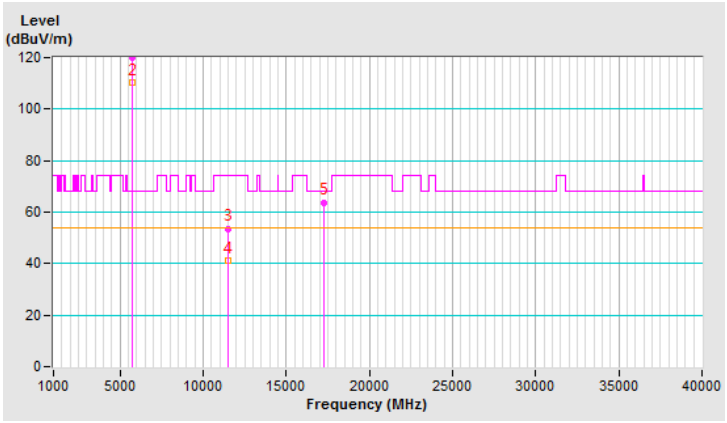


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 157：5.785 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	23℃	量 測 場 地 濕 度 ：	67%RH
測 試 日 期 ：	109 年 1 月 21 日	測 試 者 ：	柯其宗

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5785.00	122.9 PK			1.80 H	292	119.5	3.4
2	*5785.00	111.3 AV			1.80 H	292	107.9	3.4
3	11570.00	52.2 PK	74.0	-21.8	1.65 H	139	40.0	12.2
4	11570.00	41.5 AV	54.0	-12.5	1.65 H	139	29.3	12.2
5	#17355.00	68.0 PK	68.2	-0.2	3.48 H	127	51.4	16.6
6	#23140.00	-	-	-	-	-	-	-
7	#28925.00	-	-	-	-	-	-	-
8	#34710.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

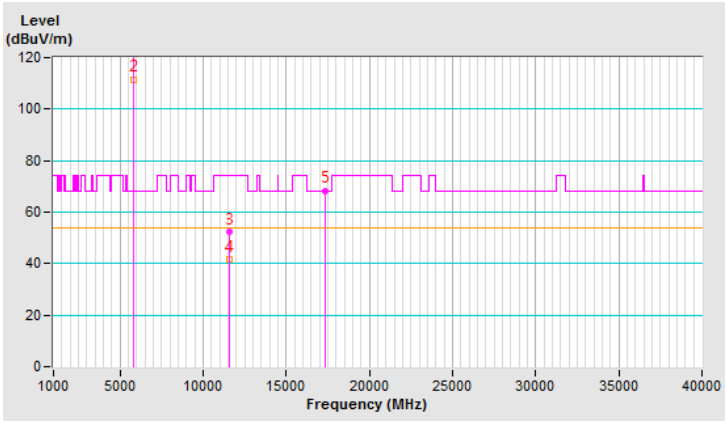


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 157：5.785 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	23℃	量 測 場 地 濕 度 ：	67%RH
測 試 日 期 ：	109 年 1 月 21 日	測 試 者 ：	柯其宗

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5785.00	121.1 PK			1.47 V	342	117.7	3.4
2	*5785.00	110.4 AV			1.47 V	342	107.0	3.4
3	11570.00	53.8 PK	74.0	-20.2	3.98 V	195	41.6	12.2
4	11570.00	41.6 AV	54.0	-12.4	3.98 V	195	29.4	12.2
5	#17355.00	64.0 PK	68.2	-4.2	3.31 V	173	47.4	16.6
6	#23140.00	-	-	-	-	-	-	-
7	#28925.00	-	-	-	-	-	-	-
8	#34710.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

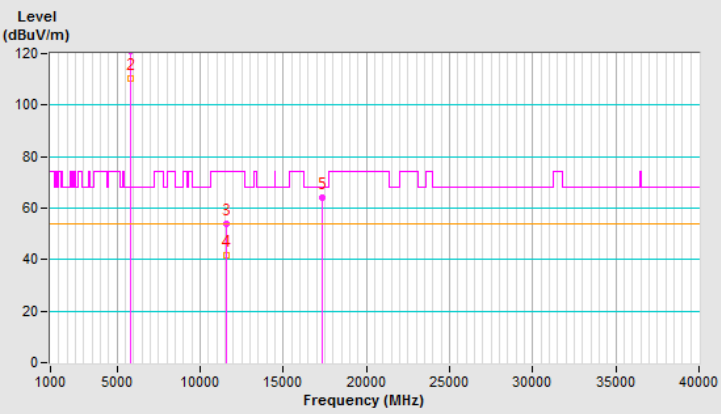


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 165：5.825 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	23℃	量 測 場 地 濕 度 ：	67%RH
測 試 日 期 ：	109 年 1 月 21 日	測 試 者 ：	柯其宗

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5825.00	121.1 PK			1.96 H	306	117.5	3.6
2	*5825.00	110.7 AV			1.96 H	306	107.1	3.6
3	11650.00	52.4 PK	74.0	-21.6	1.70 H	132	40.0	12.4
4	11650.00	41.8 AV	54.0	-12.2	1.70 H	132	29.4	12.4
5	#17475.00	67.9 PK	68.2	-0.3	3.39 H	111	50.9	17.0
6	#23300.00	-	-	-	-	-	-	-
7	#29125.00	-	-	-	-	-	-	-
8	#34950.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

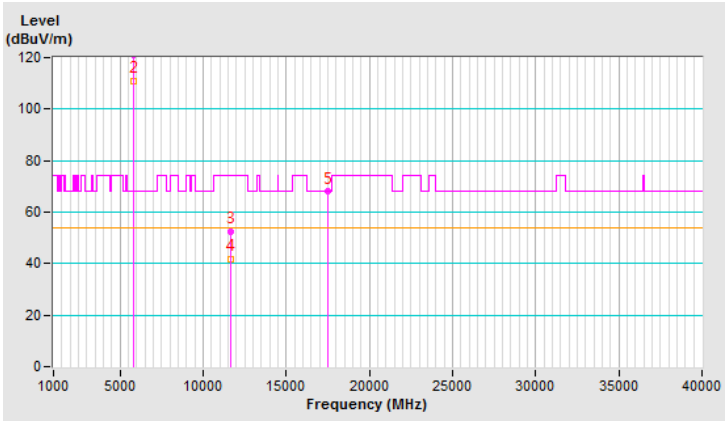


操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 165：5.825 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 ：	23℃	量 測 場 地 濕 度 ：	67%RH
測 試 日 期 ：	109 年 1 月 21 日	測 試 者 ：	柯其宗

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5825.00	121.8 PK			1.52 V	354	118.2	3.6
2	*5825.00	110.0 AV			1.52 V	354	106.4	3.6
3	11650.00	53.6 PK	74.0	-20.4	3.95 V	178	41.2	12.4
4	11650.00	41.0 AV	54.0	-13.0	3.95 V	178	28.6	12.4
5	#17475.00	64.1 PK	68.2	-4.1	3.29 V	177	47.1	17.0
6	#23300.00	-	-	-	-	-	-	-
7	#29125.00	-	-	-	-	-	-	-
8	#34950.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

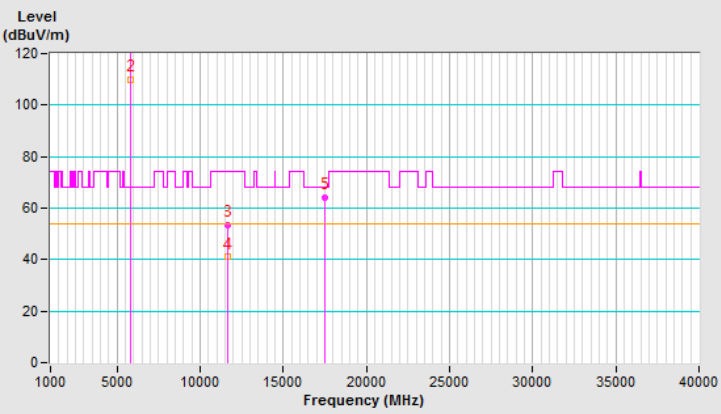

802.11ax (HE40)

操 作 模 式 ：	發射	調 變 技 術 ：	OFDMA
基 本 波 頻 率 ：	CH 38：5.19 GHz	測 試 儀 器 ：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=2kHz
量 測 場 地 溫 度 ：	23℃	量 測 場 地 濕 度 ：	67%RH
測 試 日 期 ：	109 年 1 月 21 日	測 試 者 ：	柯其宗

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	63.5 PK	74.0	-10.5	1.34 H	16	60.5	3.0
2	5150.00	49.8 AV	54.0	-4.2	1.34 H	16	46.8	3.0
3	*5190.00	112.6 PK			1.34 H	16	109.7	2.9
4	*5190.00	101.0 AV			1.34 H	16	98.1	2.9
5	#10380.00	45.1 PK	68.2	-23.1	3.94 H	189	32.9	12.2
6	15570.00	44.9 PK	74.0	-29.1	1.47 H	220	31.9	13.0
7	15570.00	36.2 AV	54.0	-17.8	1.47 H	220	23.2	13.0
8	20760.00	-	-	-	-	-	-	-
9	#25950.00	-	-	-	-	-	-	-
10	#31140.00	-	-	-	-	-	-	-
11	#36330.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

