






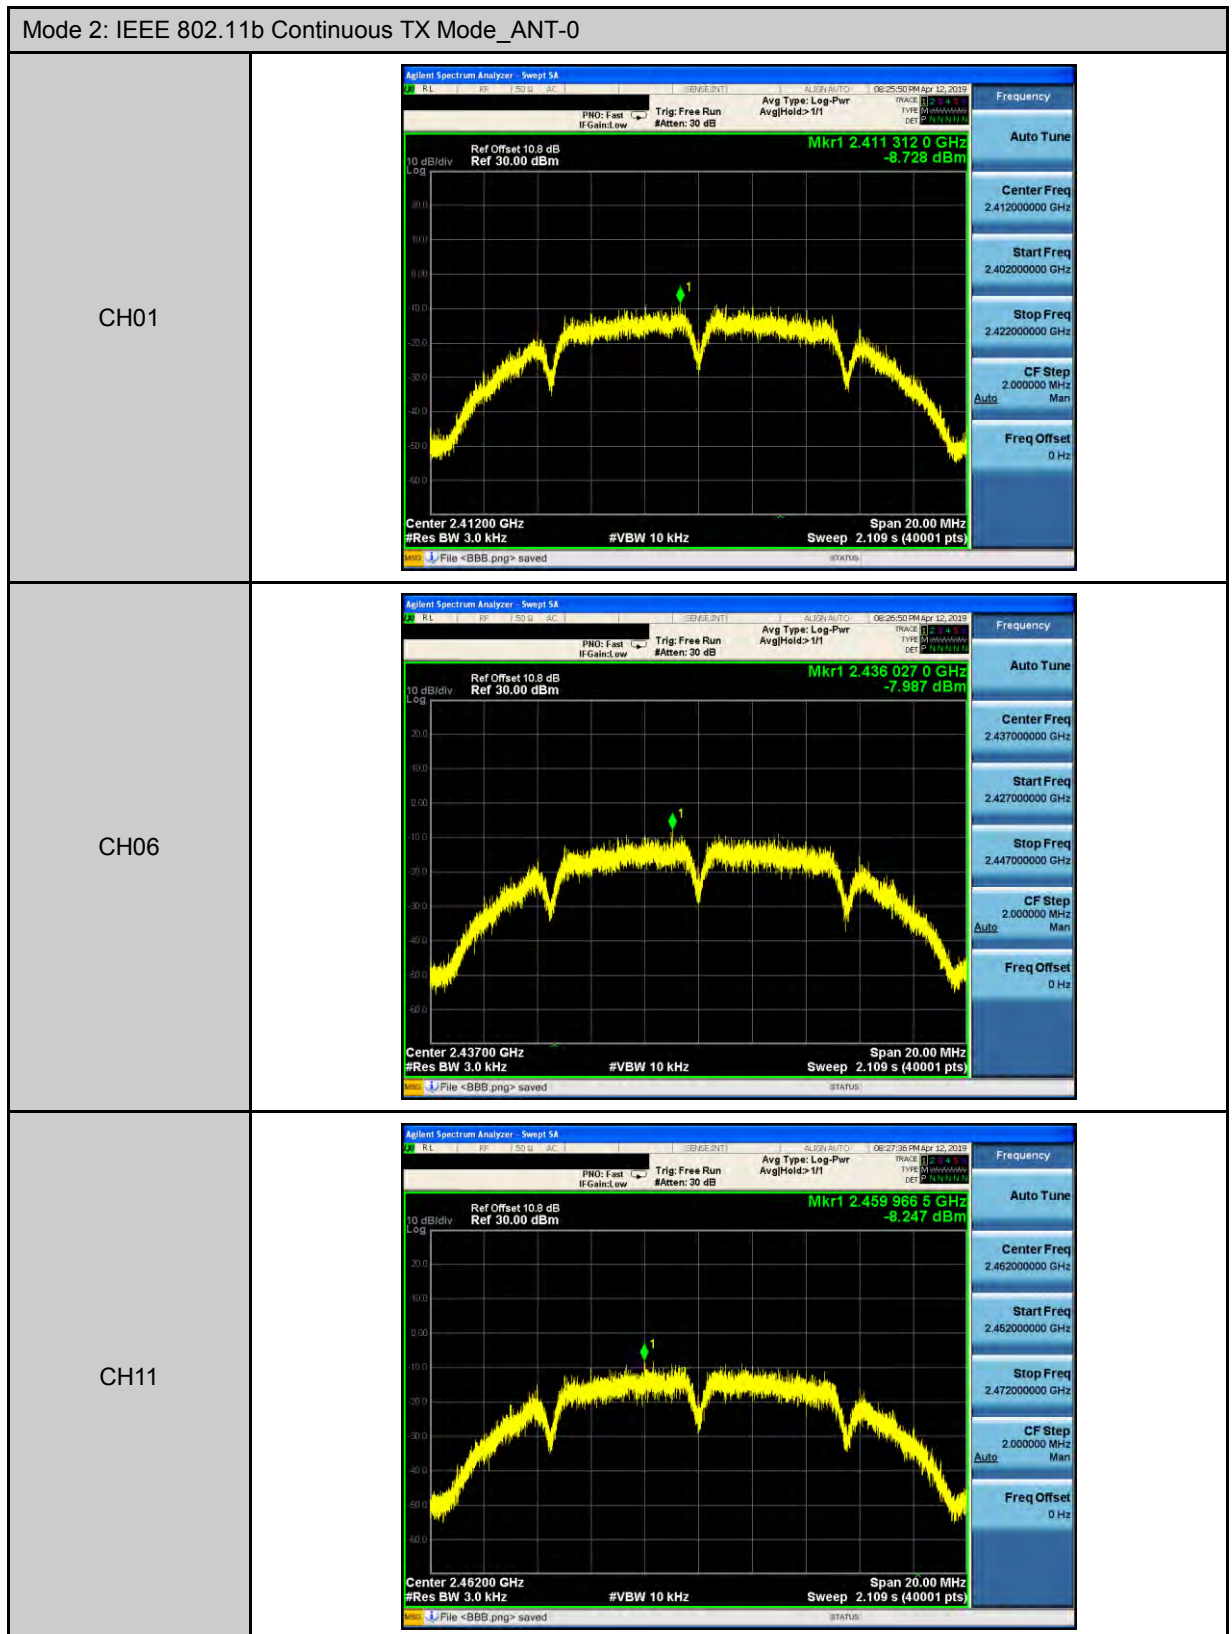


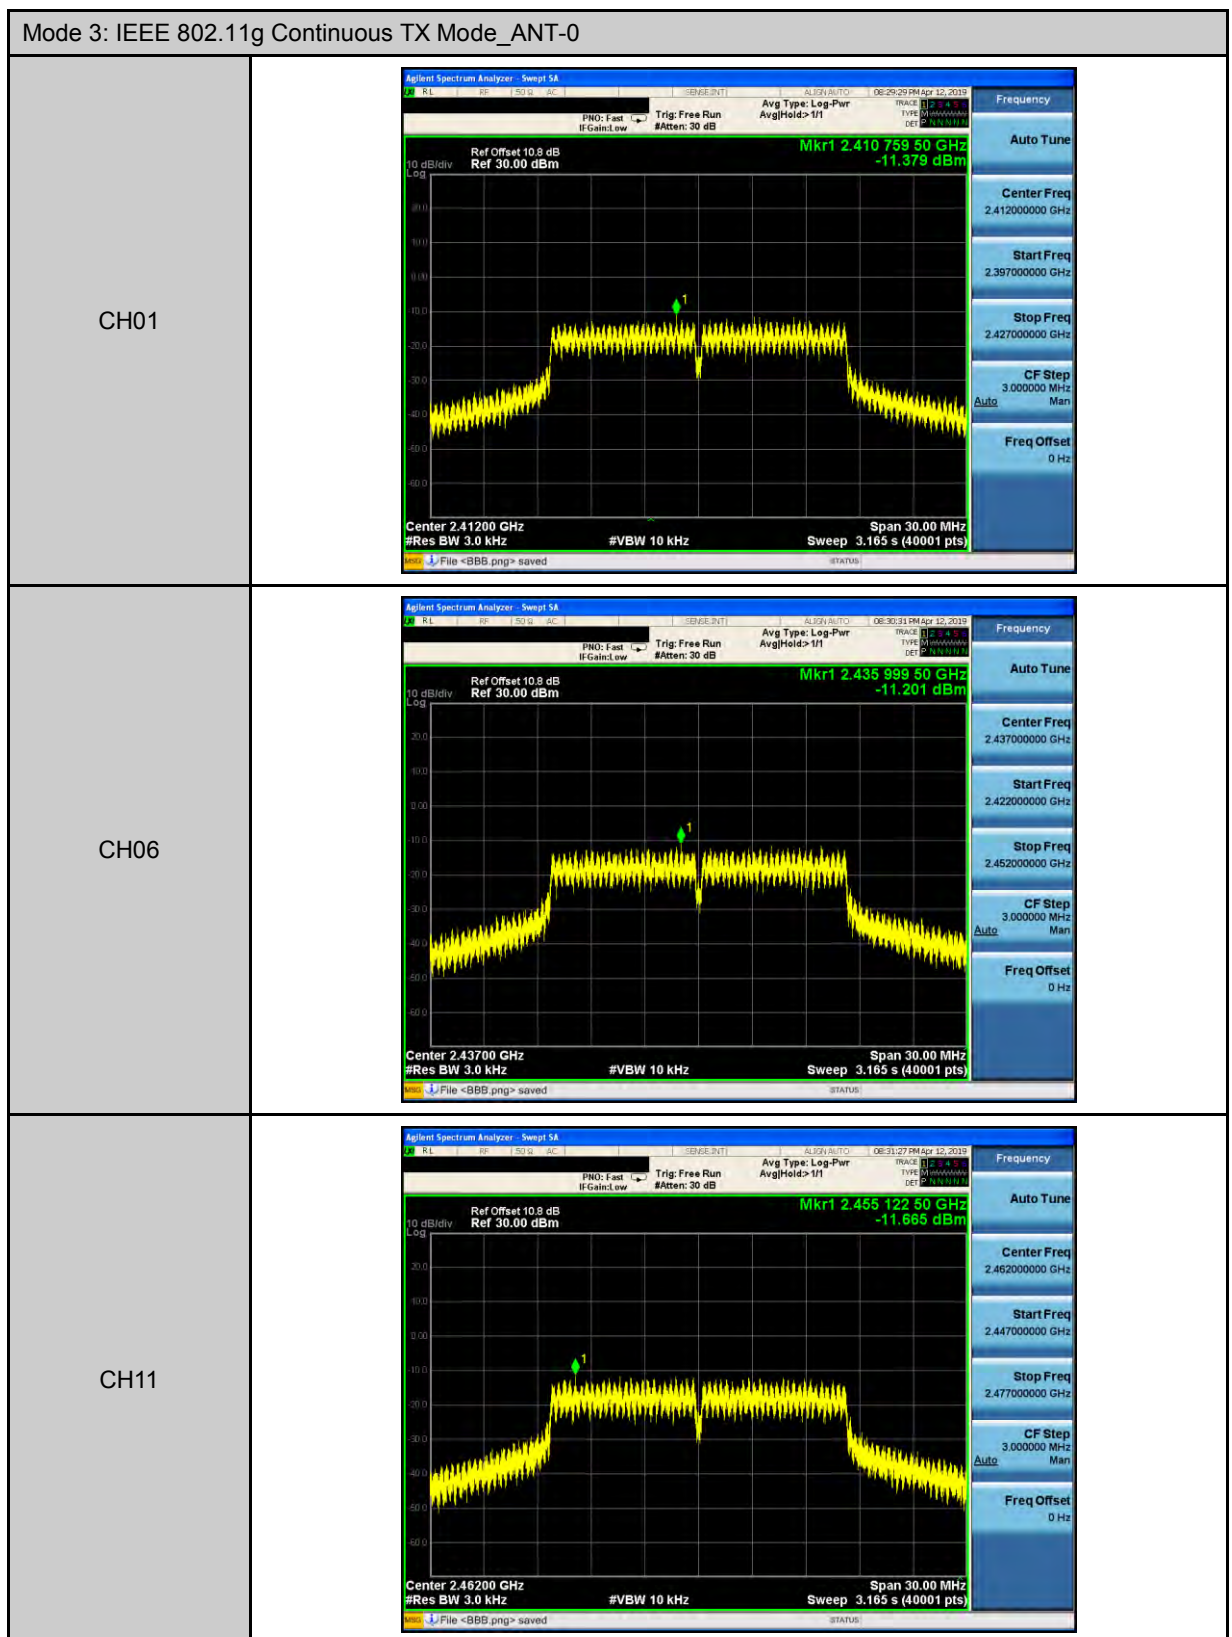

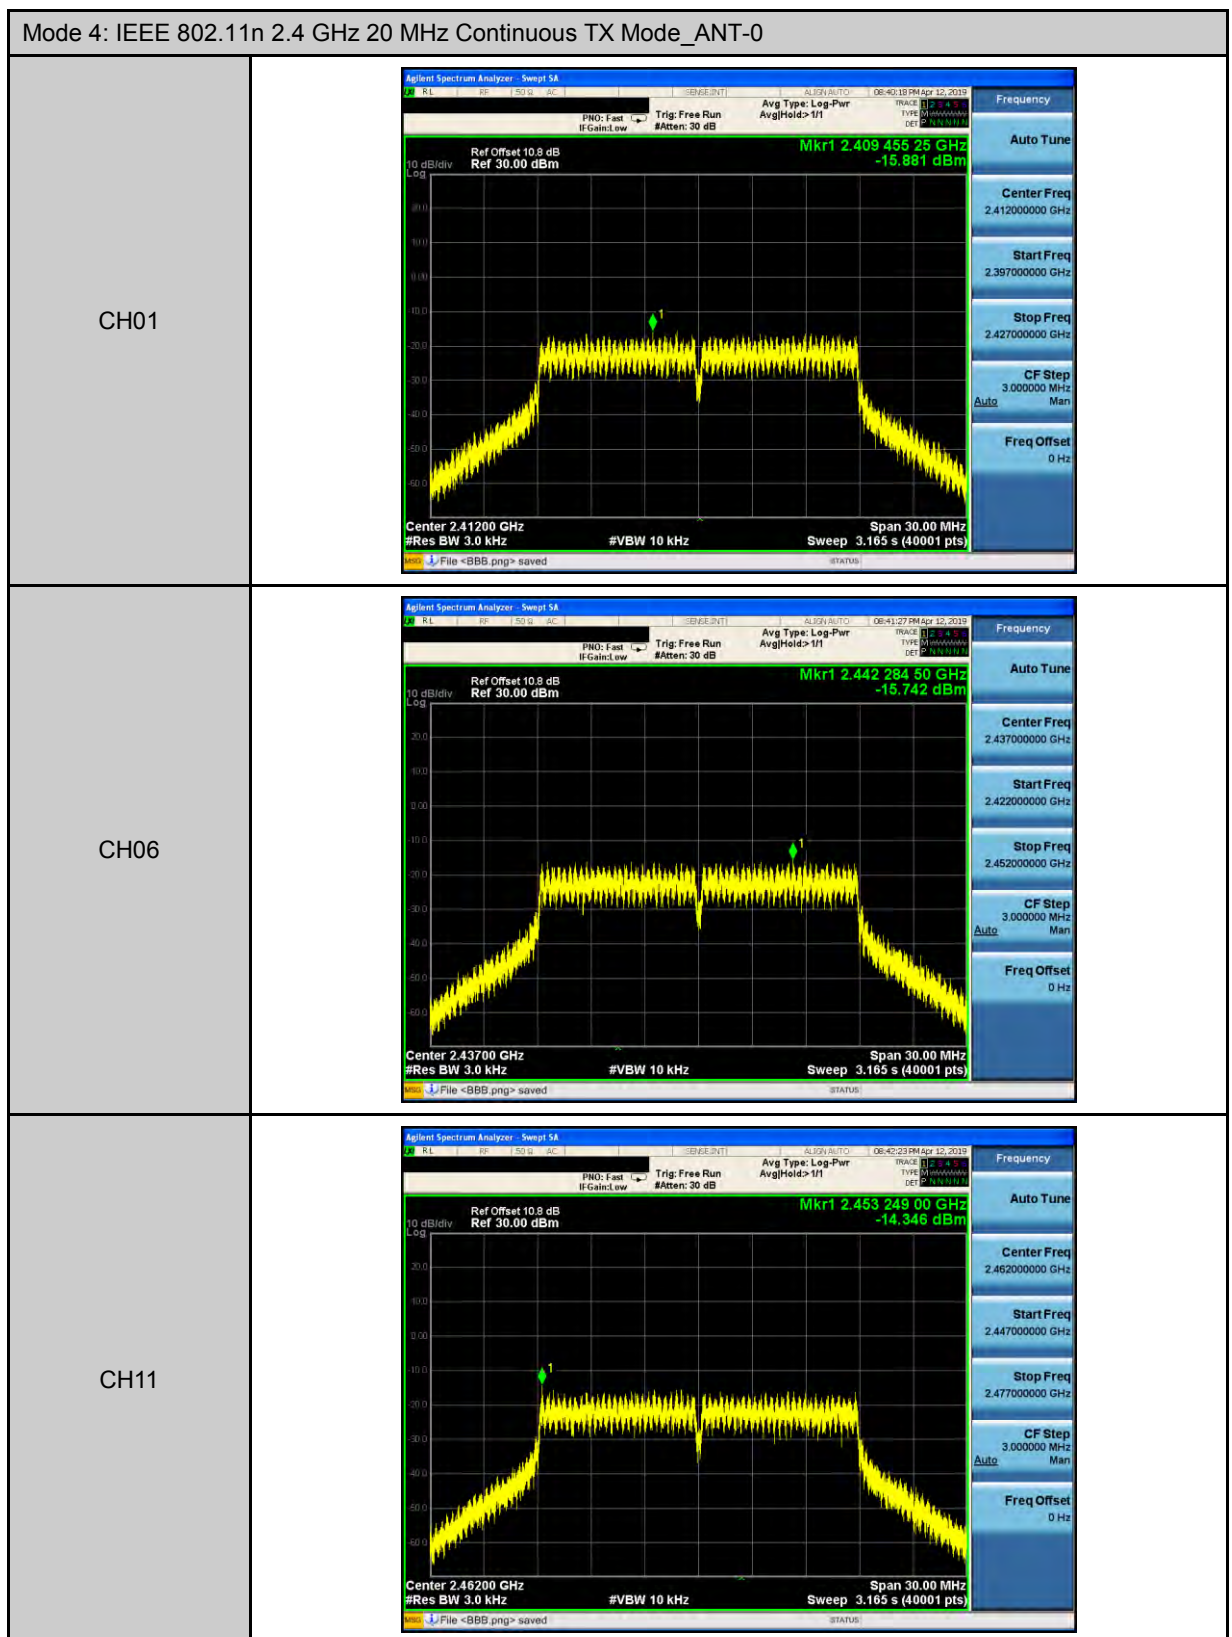

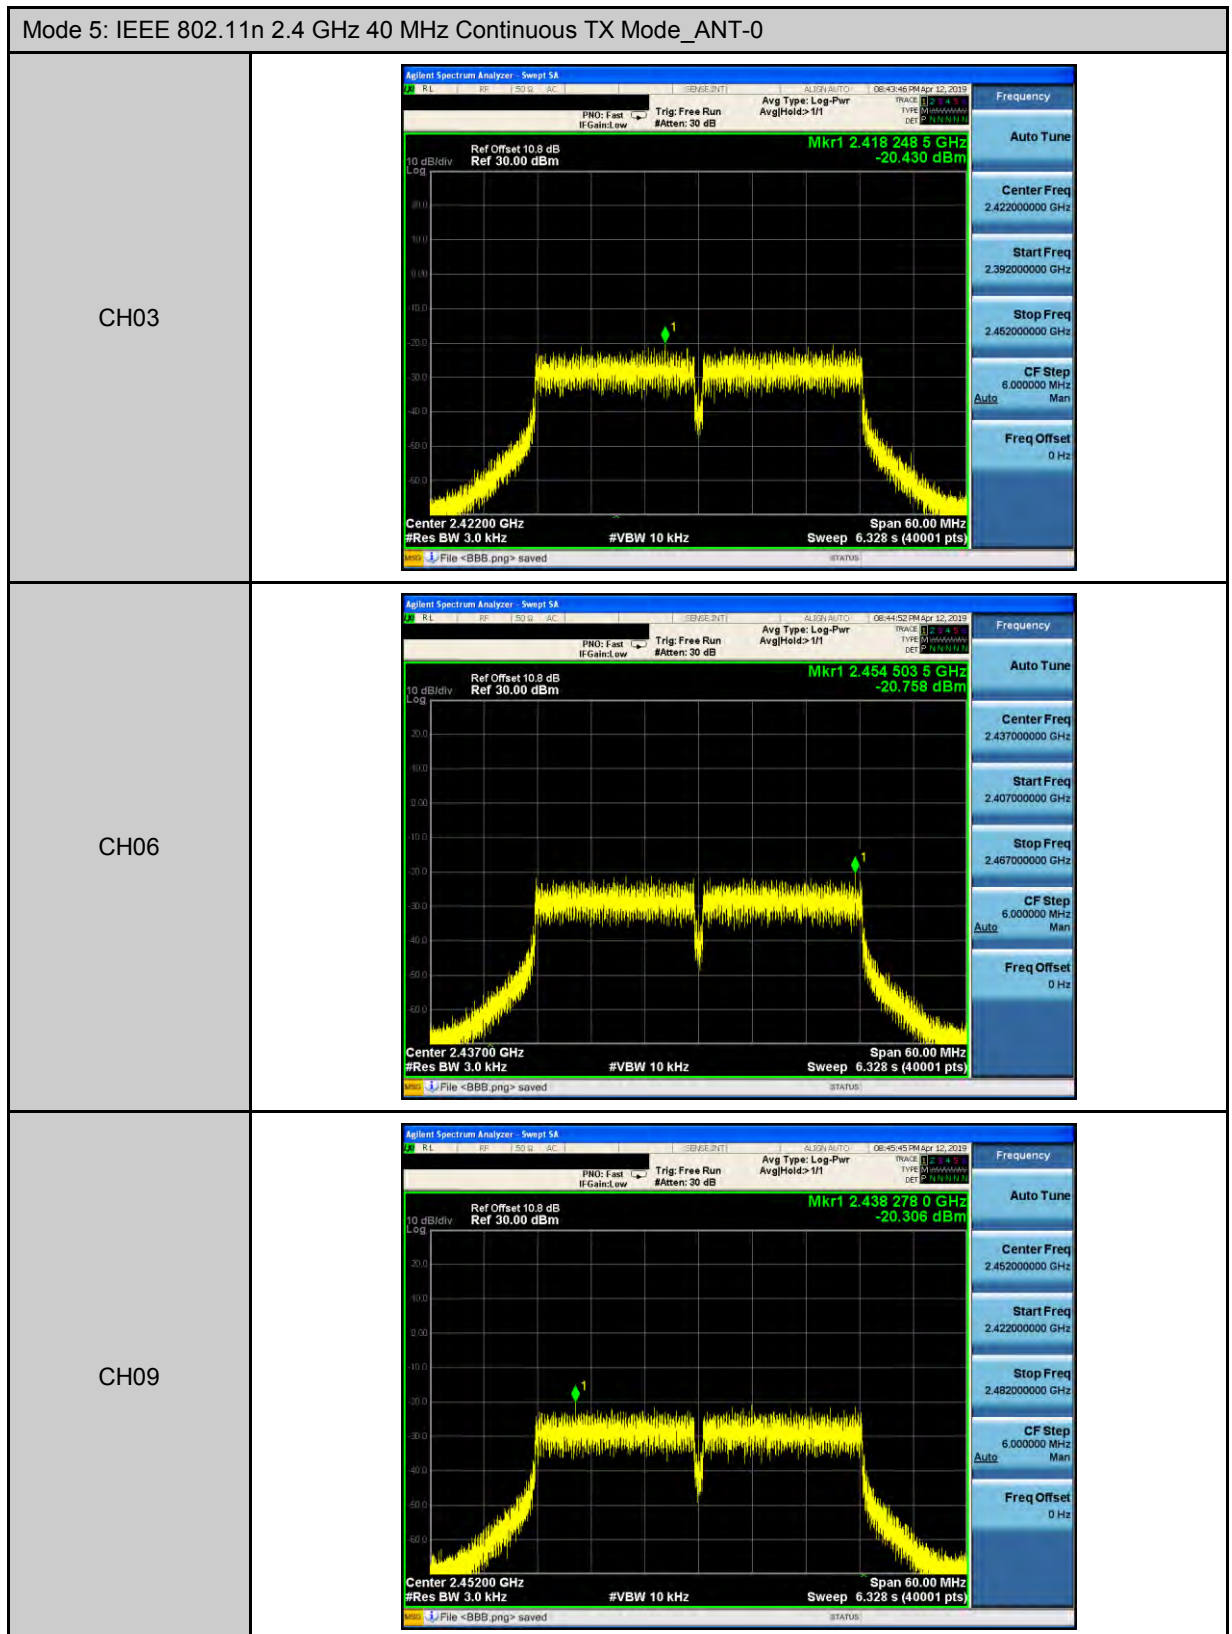

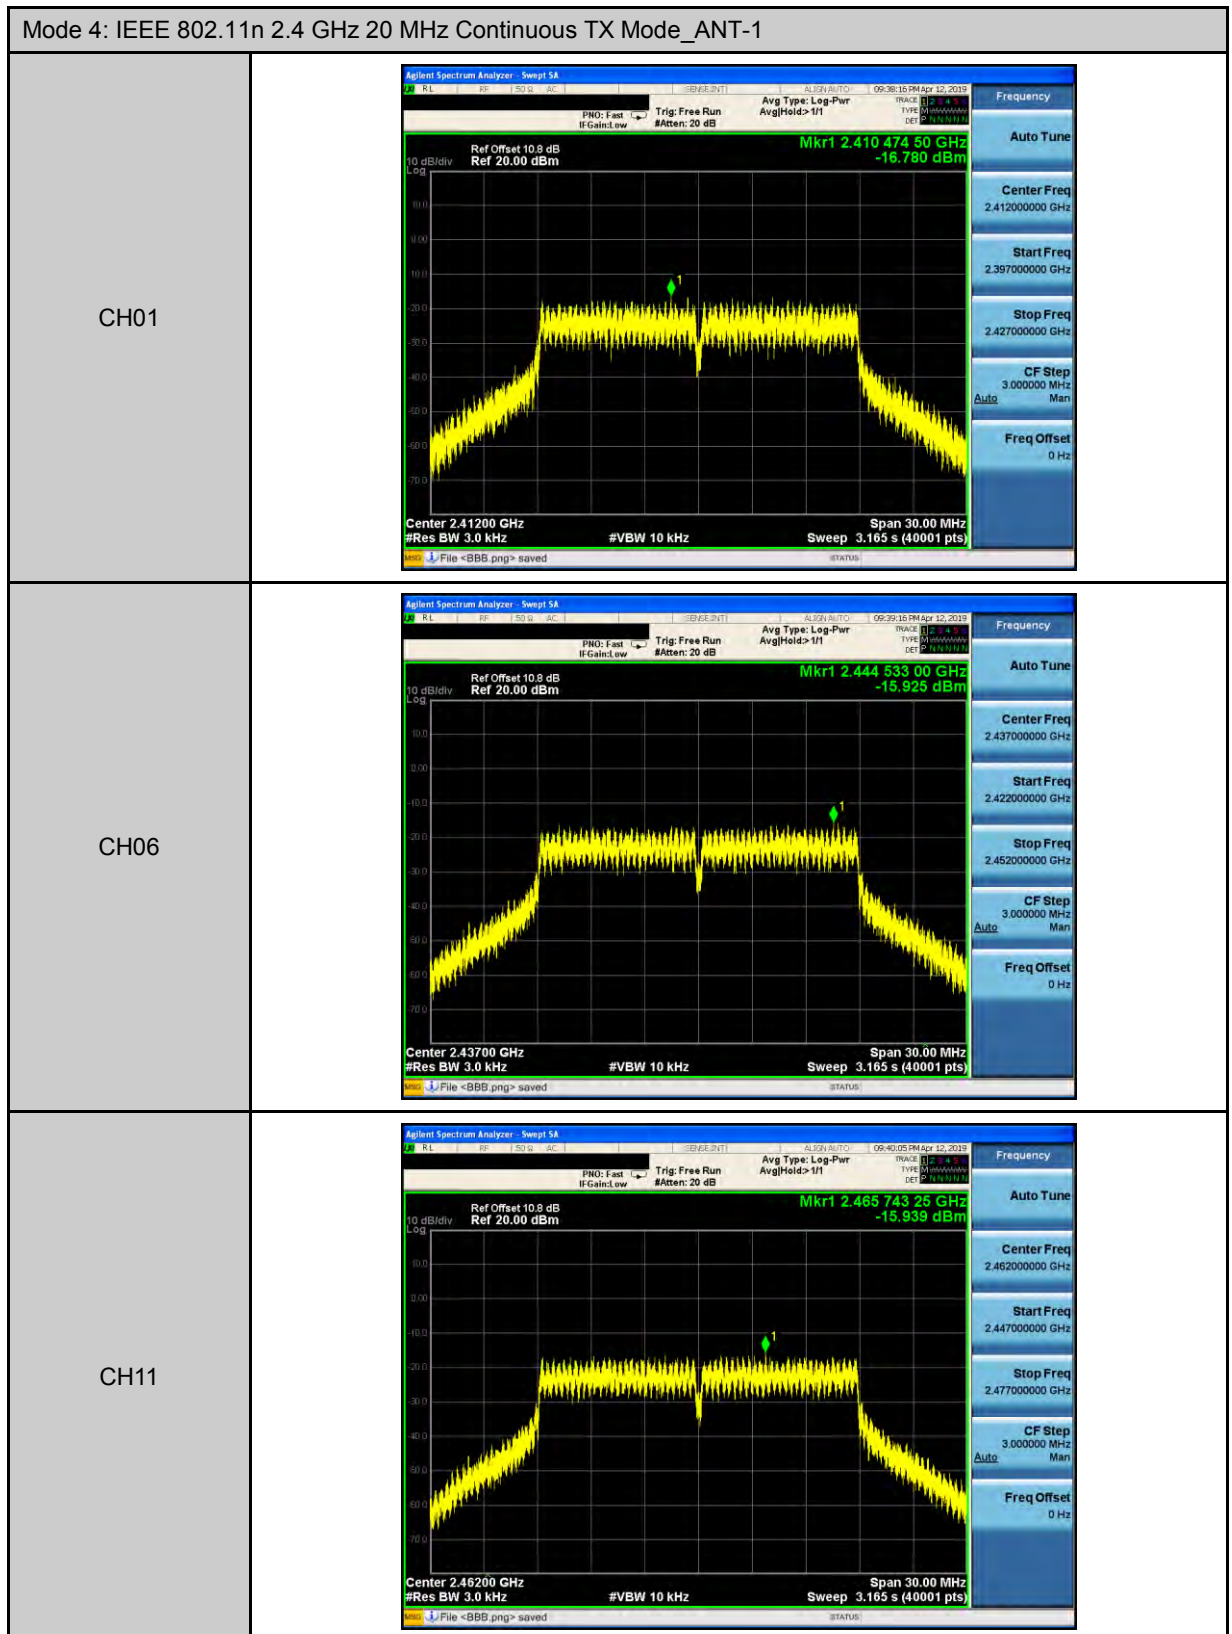

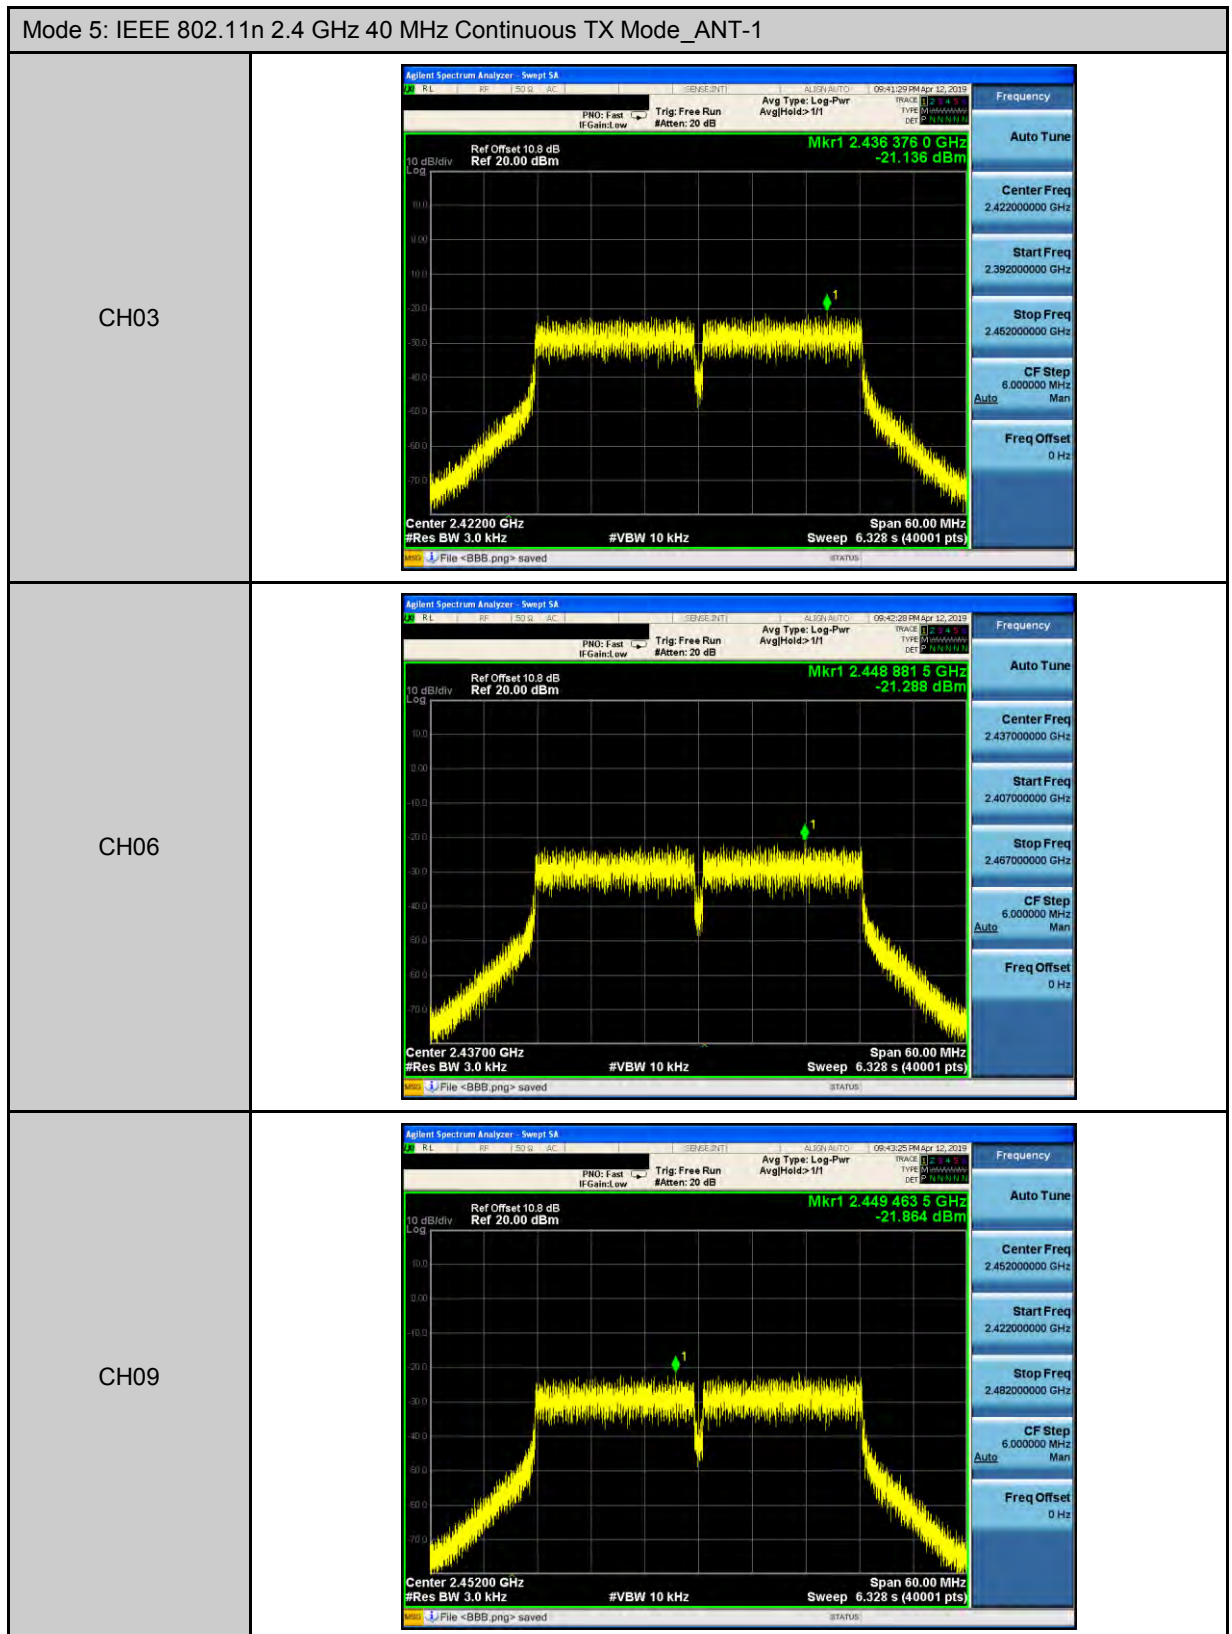

4.2.7 電波暴露量之評估

合格標準:

若受測物於正常操作模式下，其發射機距離人體 20 公分以上者，可測試最大暴露允許值(Maximum Permissible Exposure, MPE)以證明其符合電波暴露量之要求。限制值如下：

5.20.2.1 職業性/可控制之暴露

頻率範圍 (MHz)	電場強度 (V/m)	磁場強度 (A/m)	功率密度 (mW/cm ²)	平均時間 (minutes)
0.3~3.0	614	1.63	*100	6
3~30	1842/f	4.89/f	*900/f ²	6
30~300	61.4	0.163	1.0	6
300~1,500	-----	-----	f/300	6
1,500~100,000	-----	-----	5.0	6

註 1：標記*表平面波等效功率密度。

註 2：f 表測試頻率，單位：MHz。

5.20.2.2 一般人/不可控制之暴露

頻率範圍 (MHz)	電場強度 (V/m)	磁場強度 (A/m)	功率密度 (mW/cm ²)	平均時間 (minutes)
0.3~1.34	614	1.63	*100	30
1.34~30	824/f	2.19/f	*180/f ²	30
30~300	27.5	0.073	0.2	30
300~1,500	-----	-----	f/1500	30
1,500~100,000	-----	-----	1.0	30

註 1：標記*表平面波等效功率密度。

註 2：f 表測試頻率，單位：MHz。

判定結果:

Band	Frequency (MHz)	Limit (mW/cm ²)	Distance [R] (cm)	Power [P] (dBm)	ANT Gain (dBi)	Numeric Gain [G] (dBi)	Duty Cycle	With Duty cycle [P] x [G] (mW)	Power Density [S] (mW/cm ²)
IEEE 802.11b	2412	1.0	20	15.69	1.00	1.26	1	46.706	0.0093
	2437	1.0	20	16.48	1.00	1.26	1	56.024	0.0111
	2462	1.0	20	16.51	1.00	1.26	1	56.412	0.0112
IEEE 802.11g	2412	1.0	20	15.42	1.00	1.26	1	43.891	0.0087
	2437	1.0	20	15.89	1.00	1.26	1	48.907	0.0097
	2462	1.0	20	16.25	1.00	1.26	1	53.134	0.0106
IEEE 802.11n 20 MHz	2412	1.0	20	14.71	4.01	1.26	1	37.290	0.0074
	2437	1.0	20	15.37	4.01	1.26	1	43.375	0.0086
	2462	1.0	20	15.40	4.01	1.26	1	43.671	0.0087
IEEE 802.11n 40 MHz	2422	1.0	20	12.22	4.01	1.26	1	20.991	0.0042
	2437	1.0	20	12.39	4.01	1.26	1	21.871	0.0044
	2452	1.0	20	12.34	4.01	1.26	1	21.620	0.0043

Simultaneous MPE = 2.4G MPE+BT MPE = 0.0112+0.0009 = 0.0121 mW/cm²

4.3 5 GHz U-NII 檢驗項目

4.3.1 場強輻射與非必要頻帶之量測

場強輻射合格標準：

依據 NCC 低功率射頻電機技術規範(LP0002)之落於第 2.7 節禁用頻段之輻射發射，應符合第 2.8 節之規定。

依據 NCC 低功率射頻電機技術規範第 2.7 節之規定,禁用頻段如下：

頻率(MHz)	頻率(MHz)	頻率(MHz)	頻率(MHz)
0.090~0.110	108.00~138.00	1660.0~1770.0	8025.0~8500.0
0.490~0.510	149.90~150.05	1805.0~1865.0	9000.0~9200.0
2.172~2.198	156.70~156.90	1885.0~1900.0	9300.0~9500.0
3.013~3.033	162.01~167.17	1905.0~1985.0	10600~12700
4.115~4.198	167.72~173.20	2015.0~2025.0	13250~13400
5.670~5.690	240.00~285.00	2125.0~2165.0	14470~14500
6.200~6.300	322.00~335.40	2200.0~2300.0	15350~16200
8.230~8.400	399.90~410.00	2310.0~2390.0	17700~21400
12.265~12.600	485.00~510.00	2483.5~2900.0	22010~23120
13.340~13.430	608.00~614.00	3260.0~3267.0	23600~24000
14.965~15.020	703.00~748.00	3332.0~3339.0	31200~31800
16.700~16.755	758.00~803.00	3345.8~3358.0	36430~36500
19.965~20.020	825.00~915.00	3500.0~4400.0	38600 以上
25.500~25.700	930.00~1240.0	4500.0~5250.0	
37.475~38.275	1300.0~1427.0	5350.0~5460.0	
73.500~75.400	1435.0~1626.5	7250.0~7750.0	

依據 NCC 低功率射頻電機技術規範第 2.8 節之規定,除本規範各章節另有放寬規定者外，其電場強度不得超過下表之限值，且其不必要之發射皆不得大於主波發射強度。各頻段重疊處，以較嚴格之限制值為準。

頻 率 (MHz)	電場強度(μ V/m)	測距(m)
0.009 - 0.490(含)	2,400/頻率(千赫)	300
0.490 (不含) – 1.705 (含)	24,000/頻率(千赫)	30
1.705(不含) – 30 (不含)	30	30
30 (含) – 88 (含)	100	3
88 (不含)- 216 (含)	150	3
216 (不含)- 960 (含)	200	3
960 (不含)以上	500	3

非必要頻帶合格標準：

依據 NCC 低功率射頻電機技術規範(LP0002)之 4.7.4 節之要：

不必要發射之限值：在操作頻帶外的峰值發射應衰減至符合下列限值：

1. 在 5.15 GHz~5.35 GHz 及 5.470 GHz~5.725 GHz 頻帶操作的發射器：帶外發射之有效等向輻射功率(EIRP) $\leq$ -27 dBm/MHz。
2. 在 5.725 GHz~5.850 GHz 的頻帶操作之發射器：所有頻帶邊緣的頻率發射，其有效等向輻射功率(EIRP) $\leq$ 27 dBm/MHz；所有頻帶邊緣向外 5 MHz 內頻率之發射從有效等向輻射功率(EIRP) $\leq$ 27 dBm/MHz 線性減少至有效等向輻射功率(EIRP) $\leq$ 15.6 dBm/MHz；所有頻帶邊緣向外 25 MHz 內頻率之發射從有效等向輻射功率(EIRP) $\leq$ 15.6 dBm/MHz 線性減少至有效等向輻射功率(EIRP) $\leq$ 10 dBm/MHz；所有頻帶邊緣向外 75 MHz 內頻率之發射從有效等向輻射功率(EIRP) $\leq$ 10 dBm/MHz 線性減少至有效等向輻射功率(EIRP) $\leq$ -27 dBm/MHz；所有頻帶邊緣向外 75 MHz 頻率之發射的有效等向輻射功率(EIRP) $\leq$ -27 dBm/MHz。
3. 量測不必要發射時，應使用之最低解析頻寬為 1 MHz。必要時，於頻帶邊緣附近可使用小於 1 MHz 之解析頻寬，並以補償方式計算其總值。
4. 當測量不必要發射之限值時，應將待測物的載波頻率調整到儘可能接近設備設計所允許的上、下頻帶邊緣。
5. 在 1 GHz 以下的不必要之發射，應符合第 2.8 條之規定，任何使用市電為供應電源之設備亦須符合 2.3 條之電源線傳導限值。
6. 不必要發射頻率屬第 2.7 條規定頻帶者，應符合第 2.8 條之規定。

測試方法：

測試場地為開放測試場，將待測物置於 0.8 米高的非金屬桌面，使其在工作狀態，接收天線置於 3 米外相同的高度。待測物分別要垂直或水平放置，而且桌面要 360 度旋轉，另外接收天線也要從 1.0 米至 4.0 米升降變化，以找出最大的輻射電場強度，接收天線置於水平、垂直極向各執行測試一次。


場強度之計算

場強之計算公式為：結果值 = 讀值 + 校正因子


其中校正因子為：天線因子 + 饋線損失 + 濾波器損失（若有使用） - 放大器增益（若有使用）

測試架構圖：

量測頻率低於 1 GHz 以下之測試配置

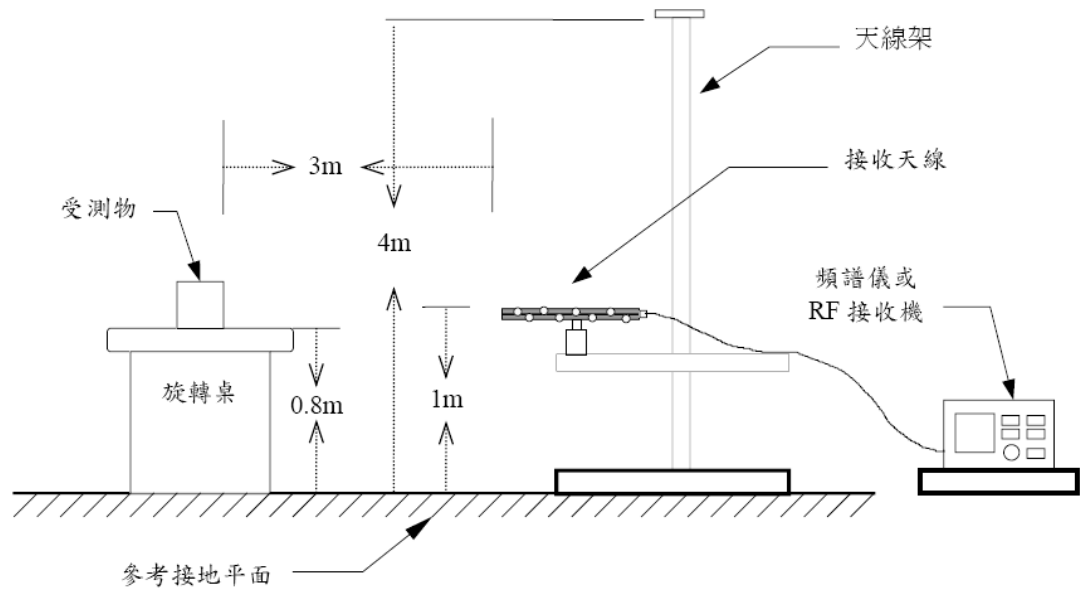

量測頻率高於 1 GHz 以上之測試配置

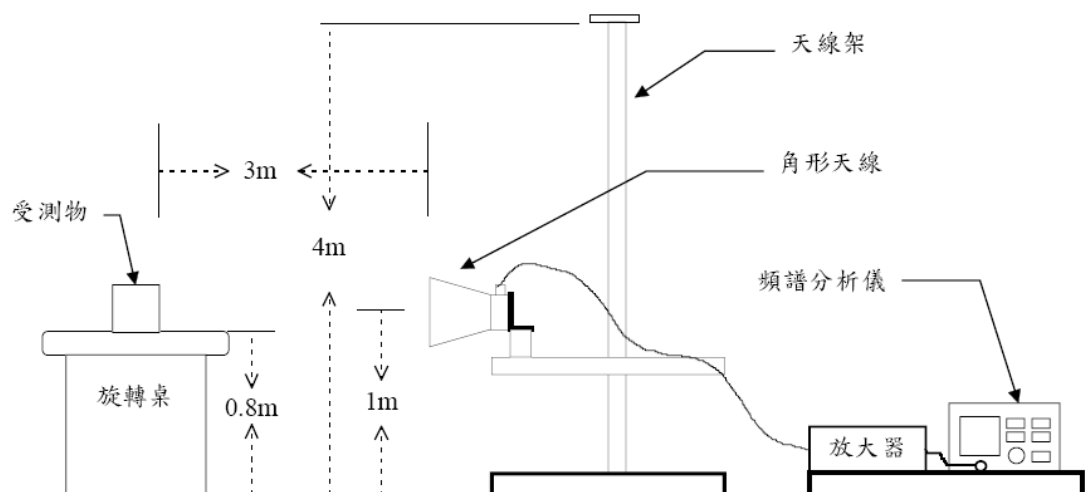

測試結果:


本產品透過預測試確認 X、Y 和 Z 個軸中最差之結果軸向為 X 軸, 因此場強輻射完整測試 X 軸並將其結果記錄於報告中。

場強輻射之量測依據輸出峰值功率之量測結果取其最大值之操作模式為場強輻射測試模式。

其它不必要之訊號 (1 GHz 以下)

主型號: KLV-W29

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 110 V/60 Hz
Frequency:	5700 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Test Mode:	Mode 6		
Ant.Polar.:	Horizontal		

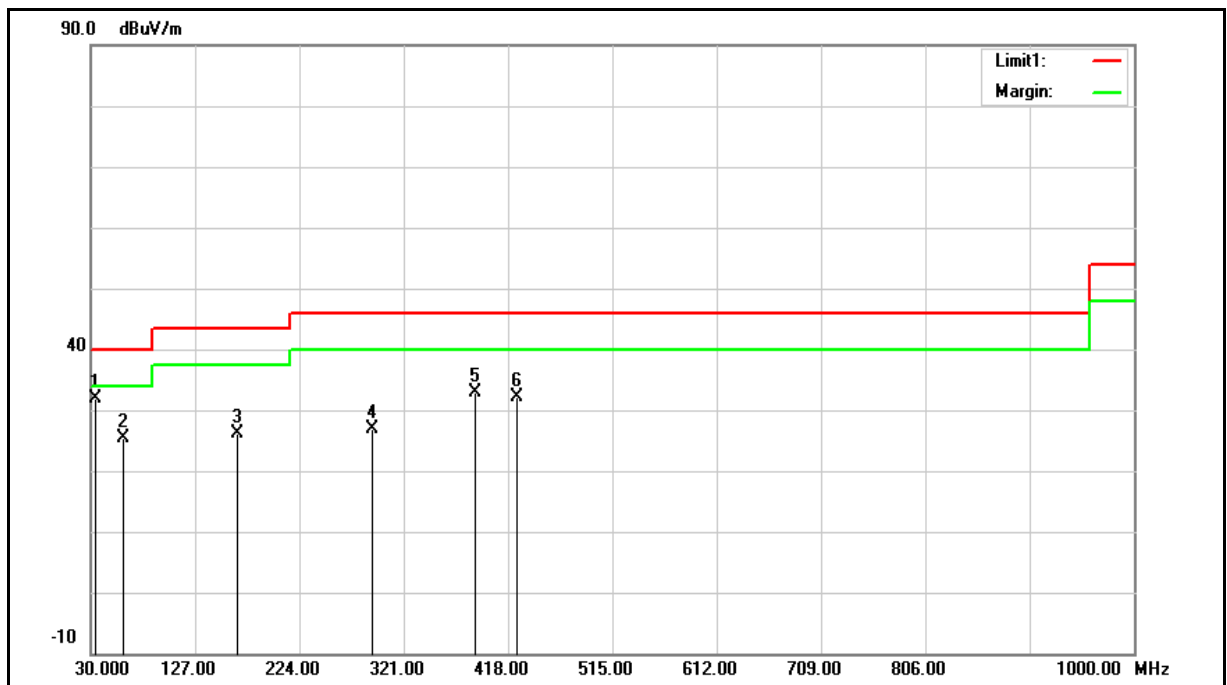

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	33.8800	39.34	-7.49	31.85	40.00	-8.15	QP
2	60.0700	32.13	-6.83	25.30	40.00	-14.70	QP
3	166.7700	31.60	-5.59	26.01	43.50	-17.49	QP
4	291.9000	30.88	-4.04	26.84	46.00	-19.16	QP
5	387.9300	34.97	-2.04	32.93	46.00	-13.07	QP
6	425.7600	33.05	-1.01	32.04	46.00	-13.96	QP


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

Example: 31.85= -7.49+39.34.

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 110 V/60 Hz
Frequency:	5700 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Test Mode:	Mode 6		
Ant.Polar.:	Vertical		

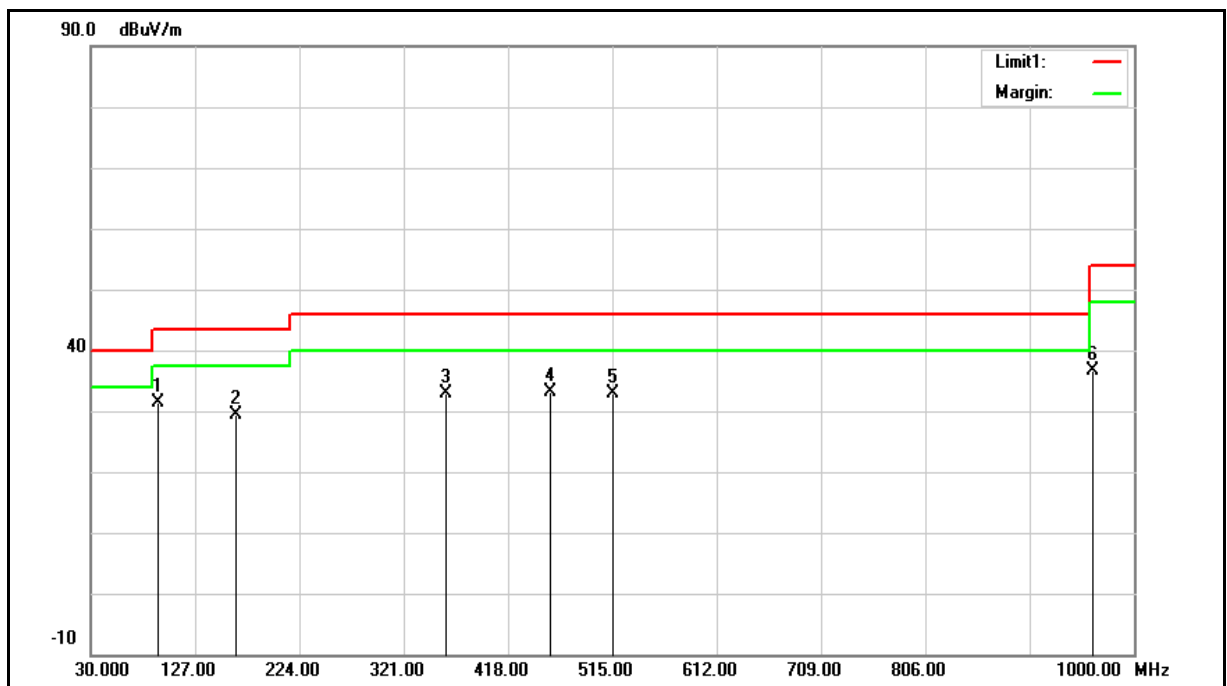

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	93.0500	43.11	-11.84	31.27	43.50	-12.23	QP
2	164.8300	35.03	-5.53	29.50	43.50	-14.00	QP
3	360.7700	35.70	-2.75	32.95	46.00	-13.05	QP
4	456.8000	33.34	-0.27	33.07	46.00	-12.93	QP
5	515.9700	32.48	0.47	32.95	46.00	-13.05	QP
6	962.1700	27.69	8.90	36.59	54.00	-17.41	QP

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

Example: 31.27= -11.84+43.11.

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

系列型號: KLV-W19

Standard: LP0002

Test Distance: 3 m

Test item: Harmonic


Power: AC 110 V/60 Hz

Frequency: 5700 MHz

Temp.(°C)/Hum. (%RH): 26(°C)/60 %RH

Test Mode: Mode 6

Ant.Polar.: Horizontal

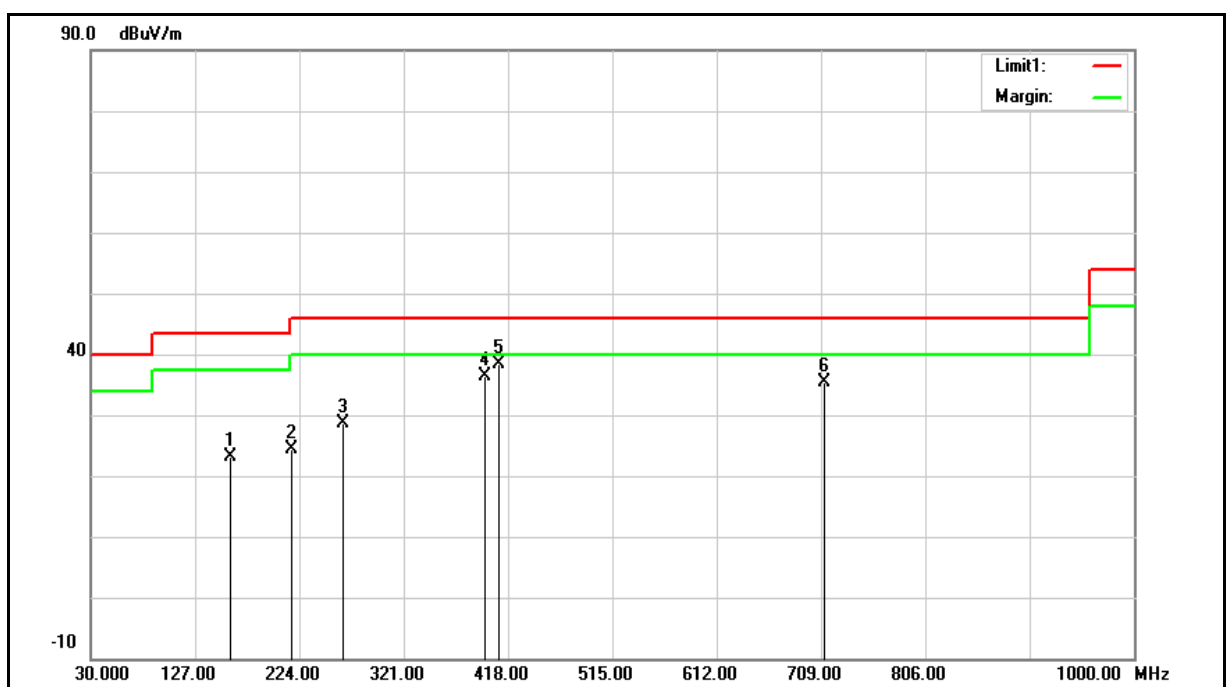


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	159.9800	28.35	-5.33	23.02	43.50	-20.48	QP
2	216.2400	31.64	-7.38	24.26	46.00	-21.74	QP
3	264.7400	33.82	-5.13	28.69	46.00	-17.31	QP
4	396.6600	38.15	-1.83	36.32	46.00	-9.68	QP
5	409.2700	39.76	-1.48	38.28	46.00	-7.72	QP
6	711.9100	30.76	4.51	35.27	46.00	-10.73	QP

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) - Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 110 V/60 Hz
Frequency:	5700 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Test Mode:	Mode 6		
Ant.Polar.:	Vertical		

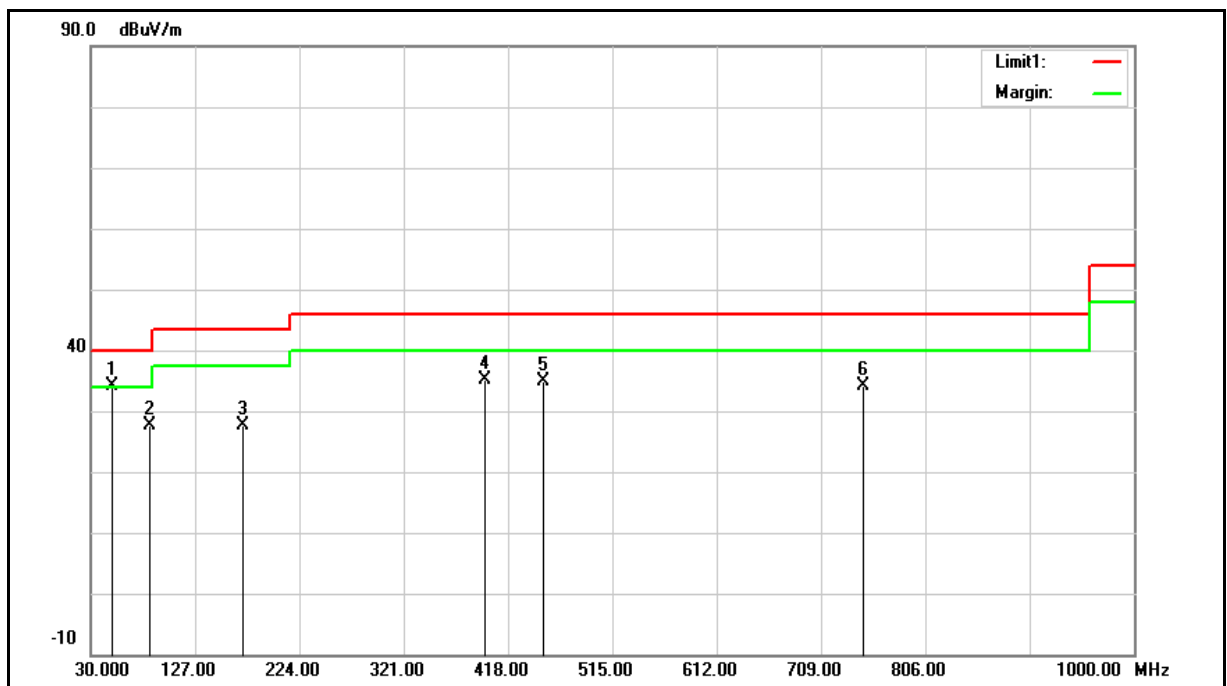

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	50.3700	40.53	-6.31	34.22	40.00	-5.78	QP
2	84.3200	39.05	-11.41	27.64	40.00	-12.36	QP
3	171.6200	33.57	-5.85	27.72	43.50	-15.78	QP
4	396.6600	37.04	-1.83	35.21	46.00	-10.79	QP
5	450.9800	35.29	-0.34	34.95	46.00	-11.05	QP
6	747.8000	28.59	5.46	34.05	46.00	-11.95	QP

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

主型號: KLV-W29 (HDMI Mode)

Standard: LP0002

Test Distance: 3 m

Test item: Harmonic


Power: AC 110 V/60 Hz

Frequency: 5700 MHz

Temp.(°C)/Hum. (%RH): 26(°C)/60 %RH

Test Mode: Mode 6

Ant.Polar.: Horizontal

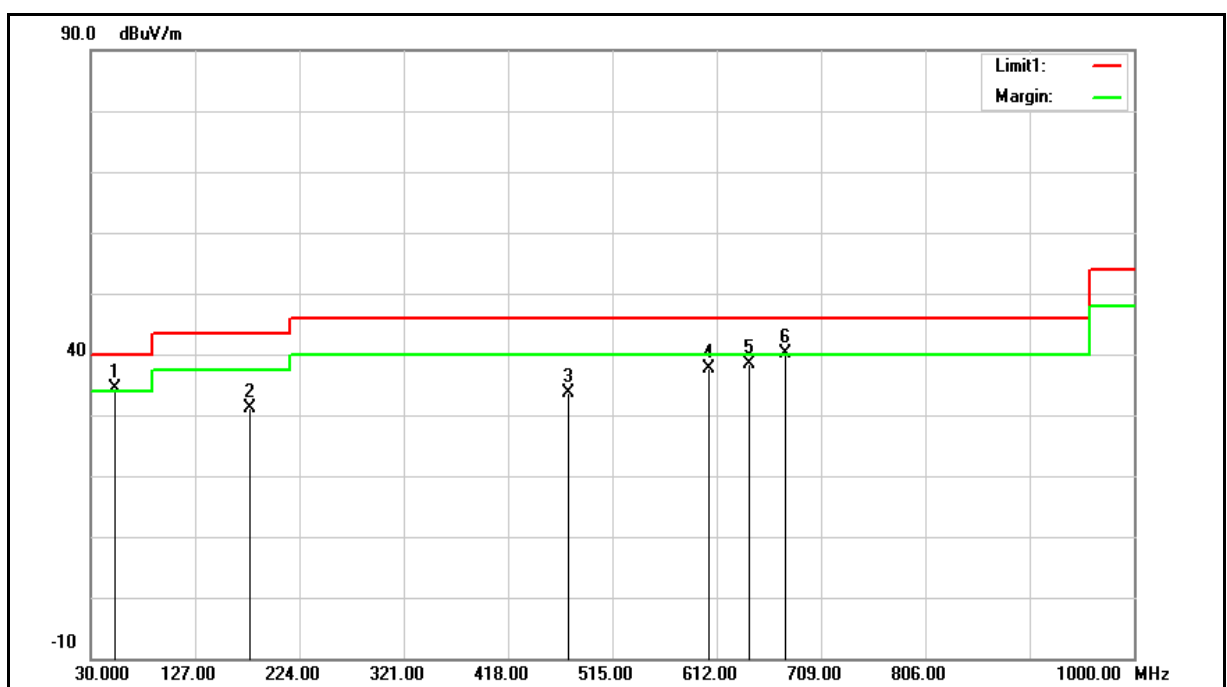


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	52.3100	40.77	-6.38	34.39	40.00	-5.61	QP
2	178.4100	37.54	-6.53	31.01	43.50	-12.49	QP
3	474.2600	33.67	-0.09	33.58	46.00	-12.42	QP
4	605.2100	35.08	2.61	37.69	46.00	-8.31	QP
5	642.0700	35.15	3.13	38.28	46.00	-7.72	QP
6	676.0200	36.43	3.73	40.16	46.00	-5.84	QP

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 110 V/60 Hz
Frequency:	5700 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Test Mode:	Mode 6		
Ant.Polar.:	Vertical		

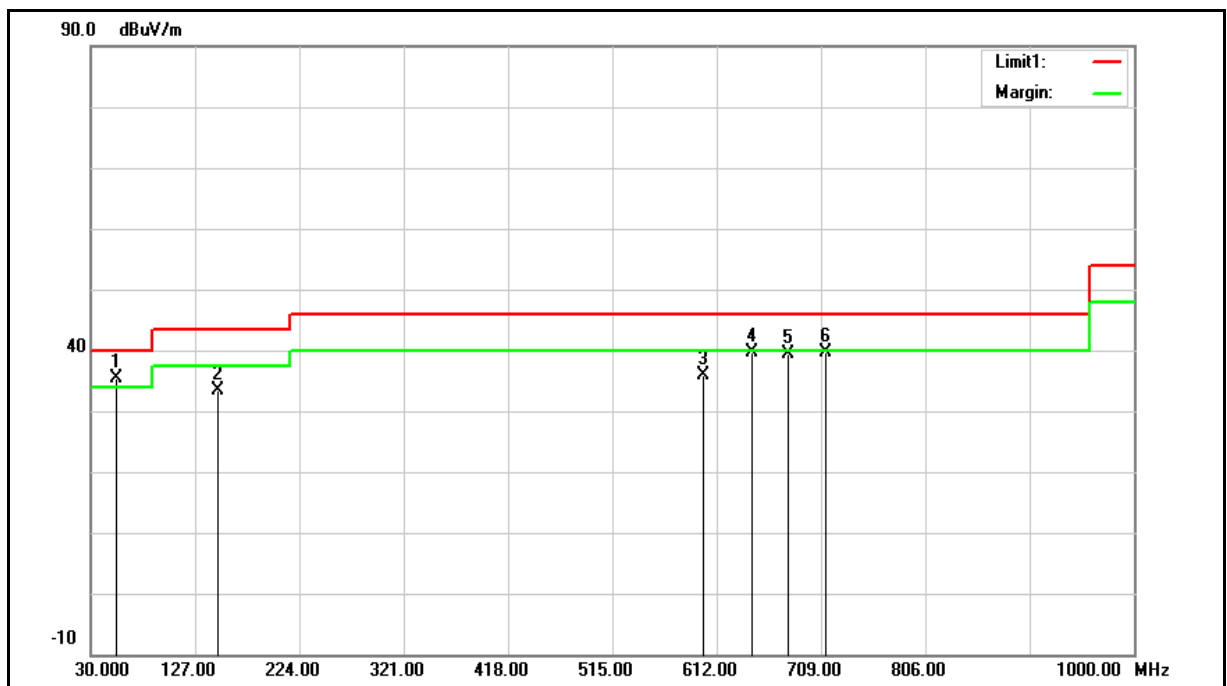

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	53.2800	41.74	-6.43	35.31	40.00	-4.69	QP
2	148.3400	39.16	-5.74	33.42	43.50	-10.08	QP
3	599.3900	33.34	2.51	35.85	46.00	-10.15	QP
4	644.9800	36.55	3.16	39.71	46.00	-6.29	QP
5	678.9300	35.69	3.78	39.47	46.00	-6.53	QP
6	713.8500	35.15	4.55	39.70	46.00	-6.30	QP

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

系列型號: KLV-W19 (HDMI Mode)

Standard: LP0002

Test Distance: 3 m

Test item: Harmonic


Power: AC 110 V/60 Hz

Frequency: 5700 MHz

Temp.(°C)/Hum. (%RH): 26(°C)/60 %RH

Test Mode: Mode 6

Ant.Polar.: Horizontal

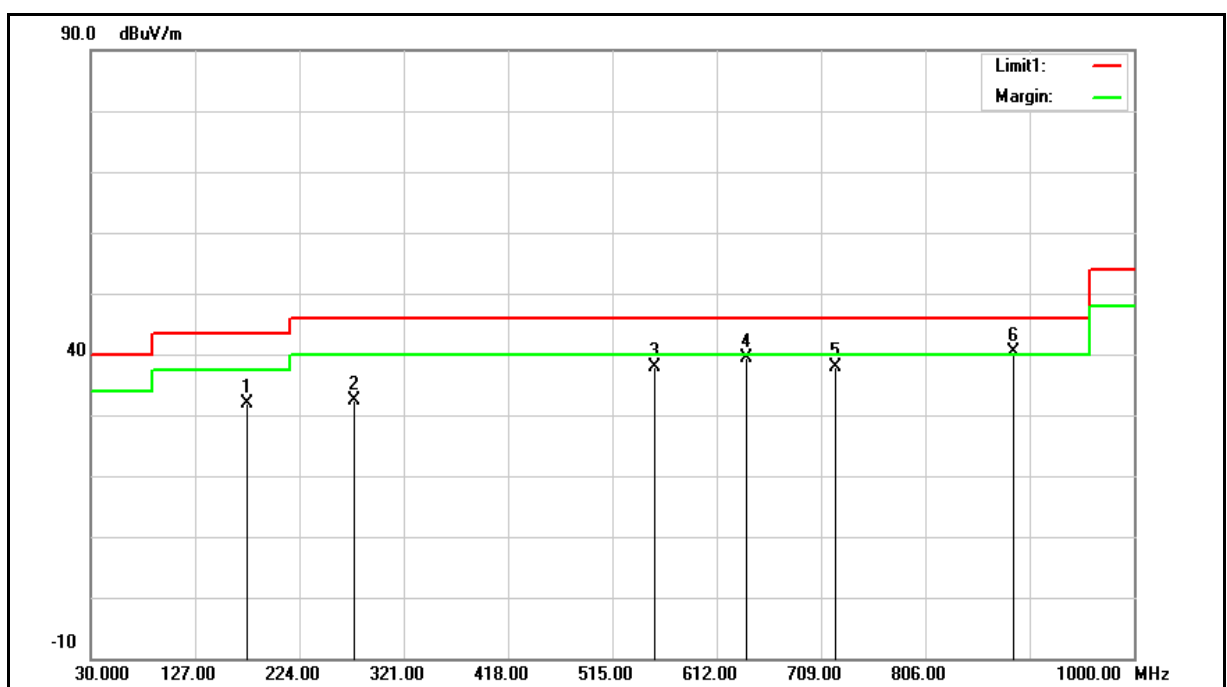


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	175.5000	38.08	-6.24	31.84	43.50	-11.66	QP
2	274.4400	36.98	-4.62	32.36	46.00	-13.64	QP
3	553.8000	36.63	1.20	37.83	46.00	-8.17	QP
4	639.1600	36.18	3.09	39.27	46.00	-6.73	QP
5	722.5800	33.03	4.79	37.82	46.00	-8.18	QP
6	888.4500	32.83	7.62	40.45	46.00	-5.55	QP

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 110 V/60 Hz
Frequency:	5700 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Test Mode:	Mode 6		
Ant.Polar.:	Vertical		

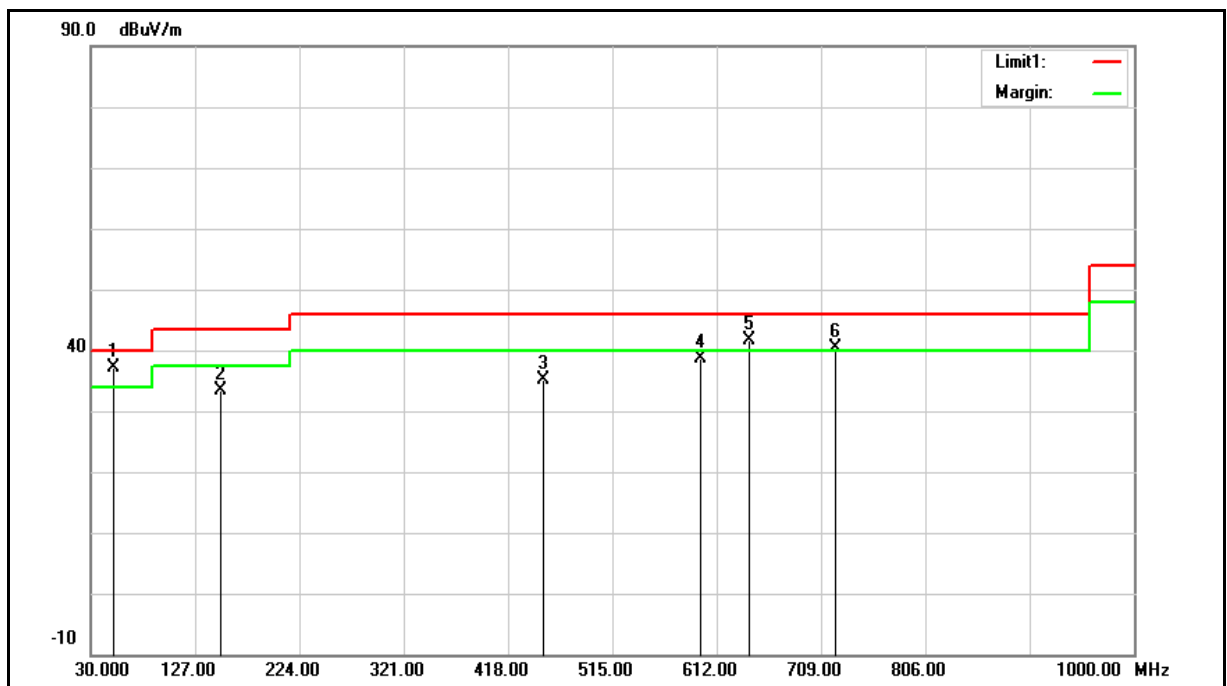

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	51.3400	43.51	-6.35	37.16	40.00	-2.84	QP
2	151.2500	39.13	-5.63	33.50	43.50	-10.00	QP
3	450.9800	35.56	-0.34	35.22	46.00	-10.78	QP
4	596.4800	36.13	2.43	38.56	46.00	-7.44	QP
5	642.0700	38.53	3.13	41.66	46.00	-4.34	QP
6	722.5800	35.58	4.79	40.37	46.00	-5.63	QP

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).


2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

場強輻射量側 (1 GHz 以上)

主型號: KLV-W29

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 110 V/60 Hz
Frequency:	5180 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 6		
Ant.Polar.:	Horizontal		

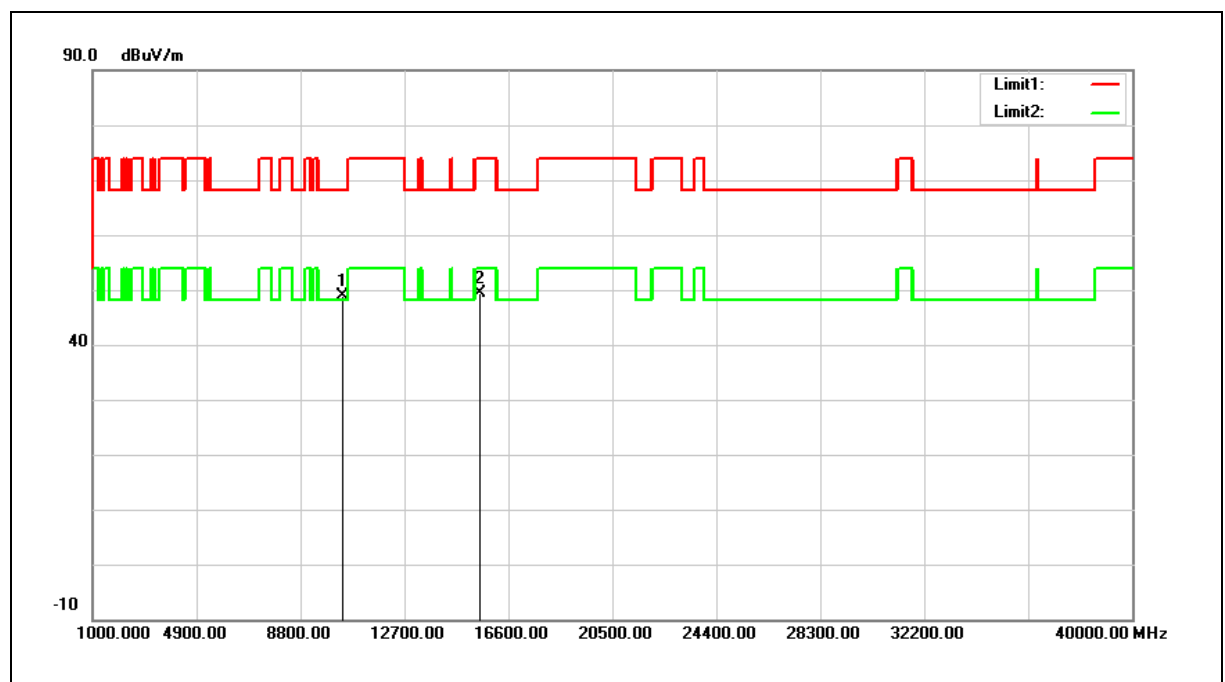


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10360.000	32.07	16.79	48.86	68.20	-19.34	peak
2	15540.000	30.33	19.03	49.36	74.00	-24.64	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 110 V/60 Hz
Frequency:	5180 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 6		
Ant.Polar.:	Vertical		

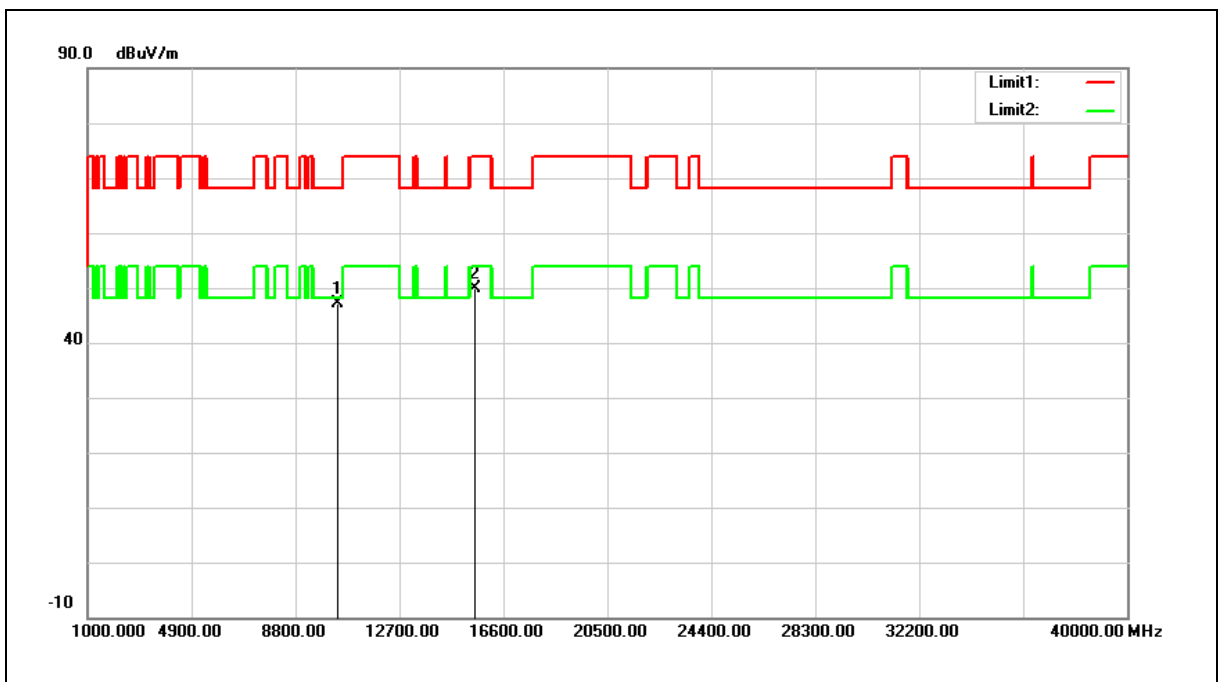


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10360.000	30.45	16.79	47.24	68.20	-20.96	peak
2	15540.000	30.85	19.03	49.88	74.00	-24.12	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 110 V/60 Hz
Frequency:	5200 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 6		
Ant.Polar.:	Horizontal		

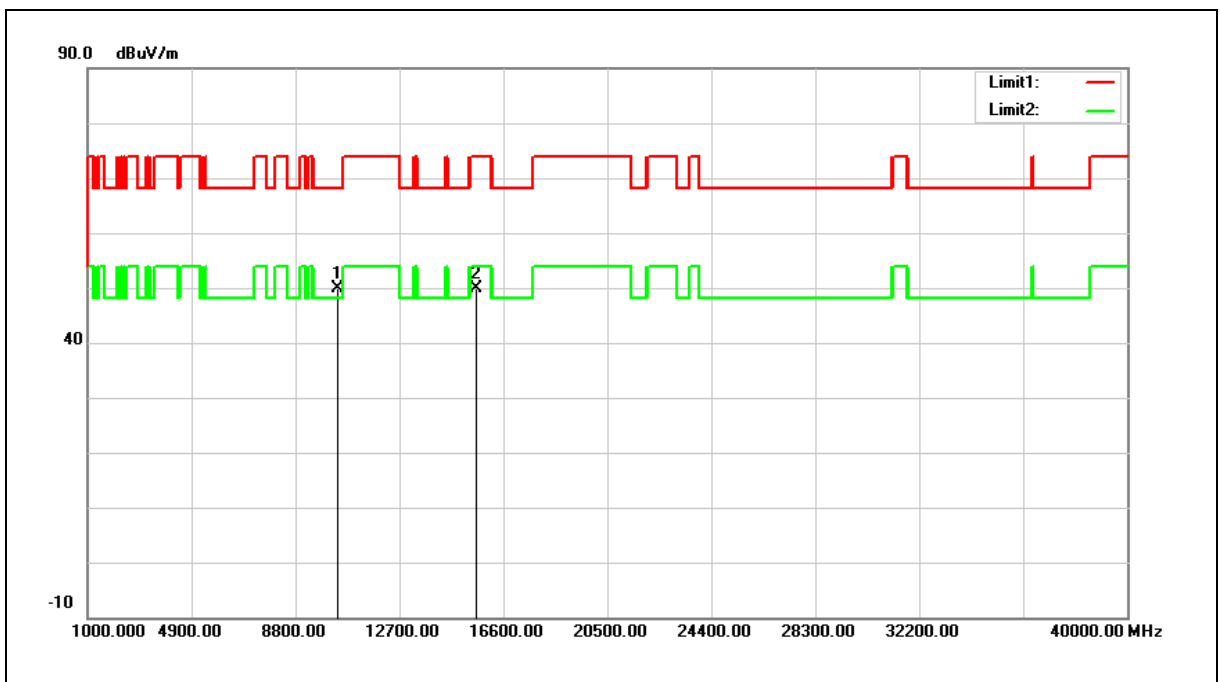


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10400.000	32.83	16.94	49.77	68.20	-18.43	peak
2	15600.000	31.10	18.87	49.97	74.00	-24.03	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 110 V/60 Hz
Frequency:	5200 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 6		
Ant.Polar.:	Vertical		

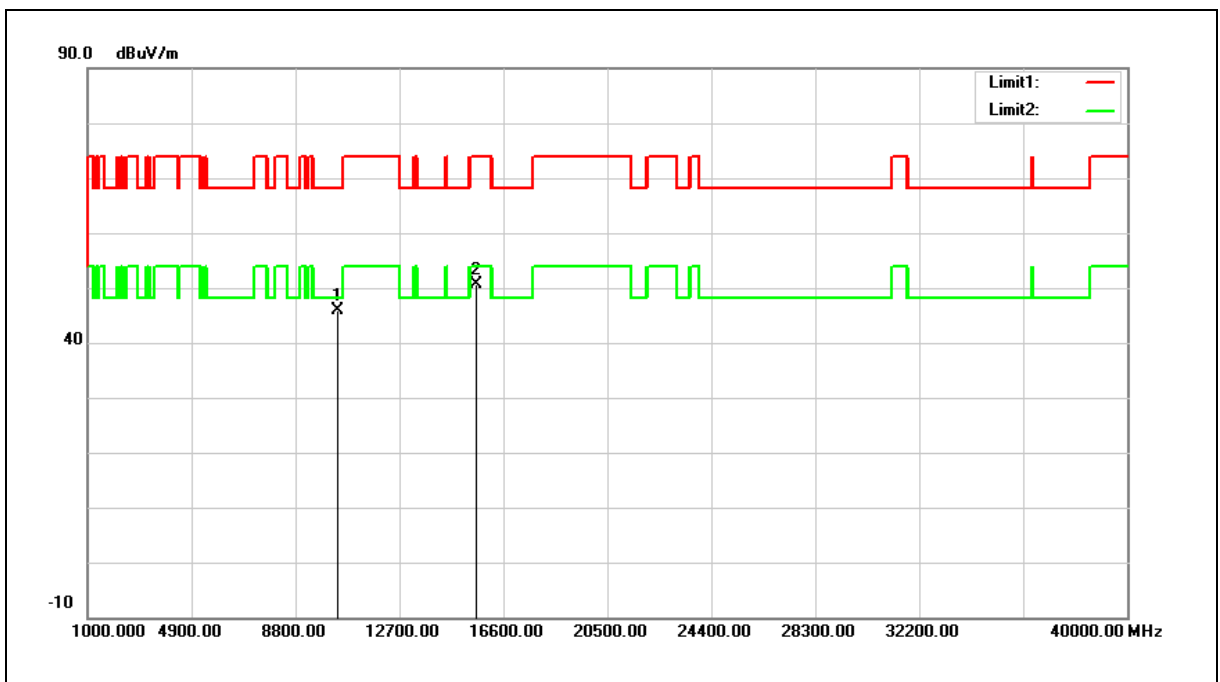


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10400.000	29.03	16.94	45.97	68.20	-22.23	peak
2	15600.000	31.71	18.87	50.58	74.00	-23.42	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 110 V/60 Hz
Frequency:	5240 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 6		
Ant.Polar.:	Horizontal		

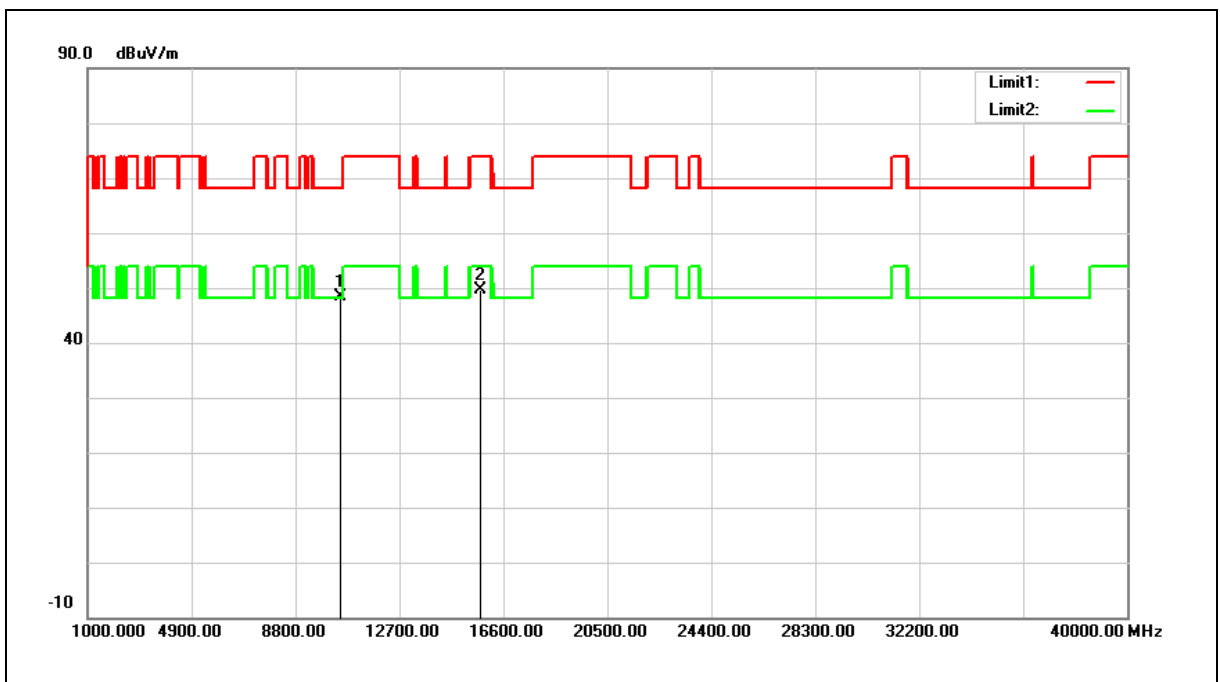


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10480.000	31.04	17.23	48.27	68.20	-19.93	peak
2	15720.000	31.02	18.57	49.59	74.00	-24.41	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 110 V/60 Hz
Frequency:	5240 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 6		
Ant.Polar.:	Vertical		

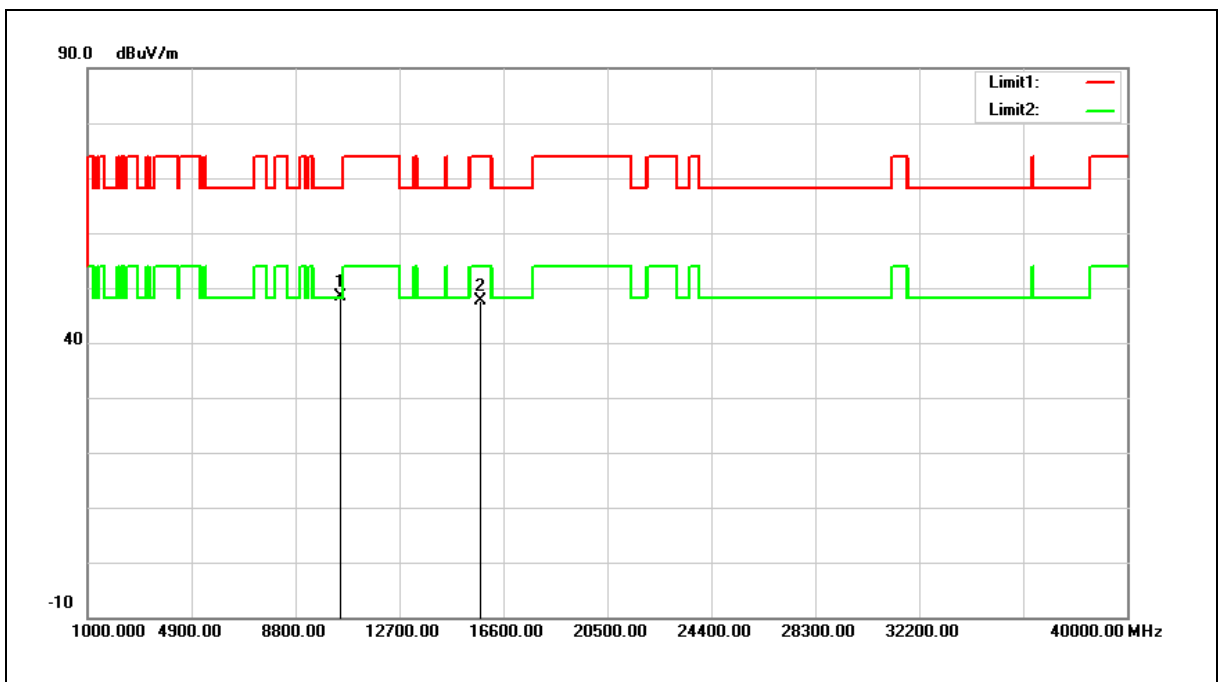


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10480.000	31.06	17.23	48.29	68.20	-19.91	peak
2	15720.000	29.04	18.57	47.61	74.00	-26.39	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 110 V/60 Hz
Frequency:	5260 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 6		
Ant.Polar.:	Horizontal		

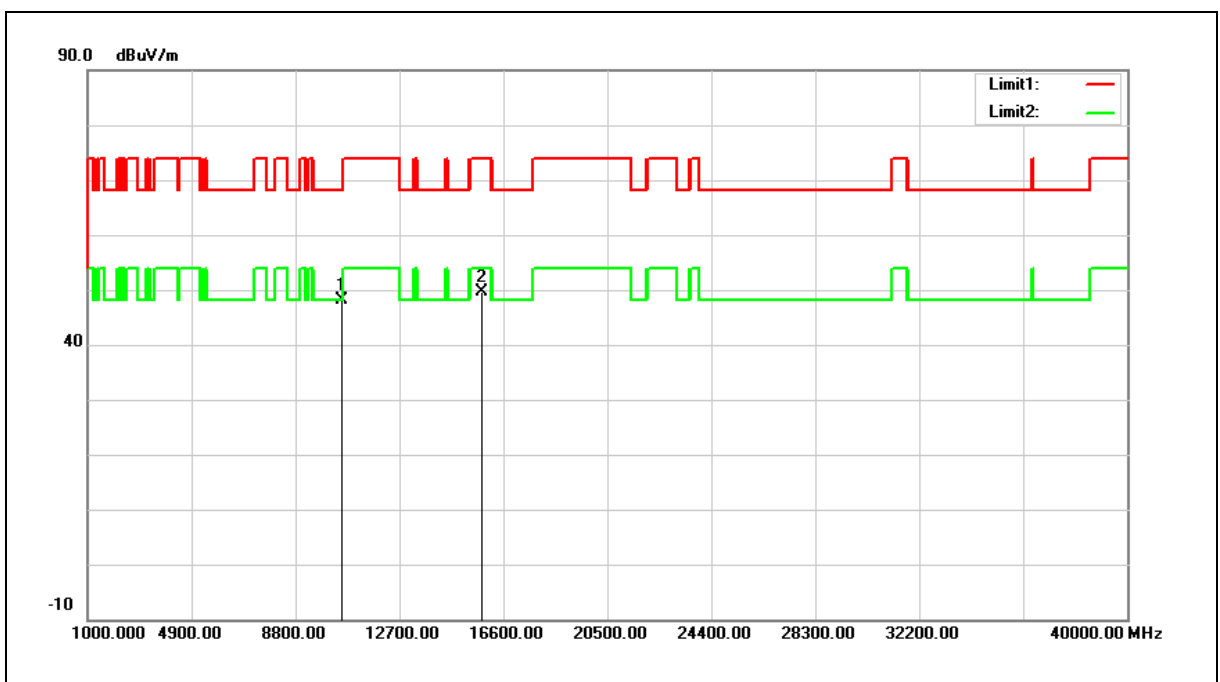


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10520.000	30.81	17.35	48.16	68.20	-20.04	peak
2	15780.000	31.33	18.41	49.74	74.00	-24.26	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 110 V/60 Hz
Frequency:	5260 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 6		
Ant.Polar.:	Vertical		

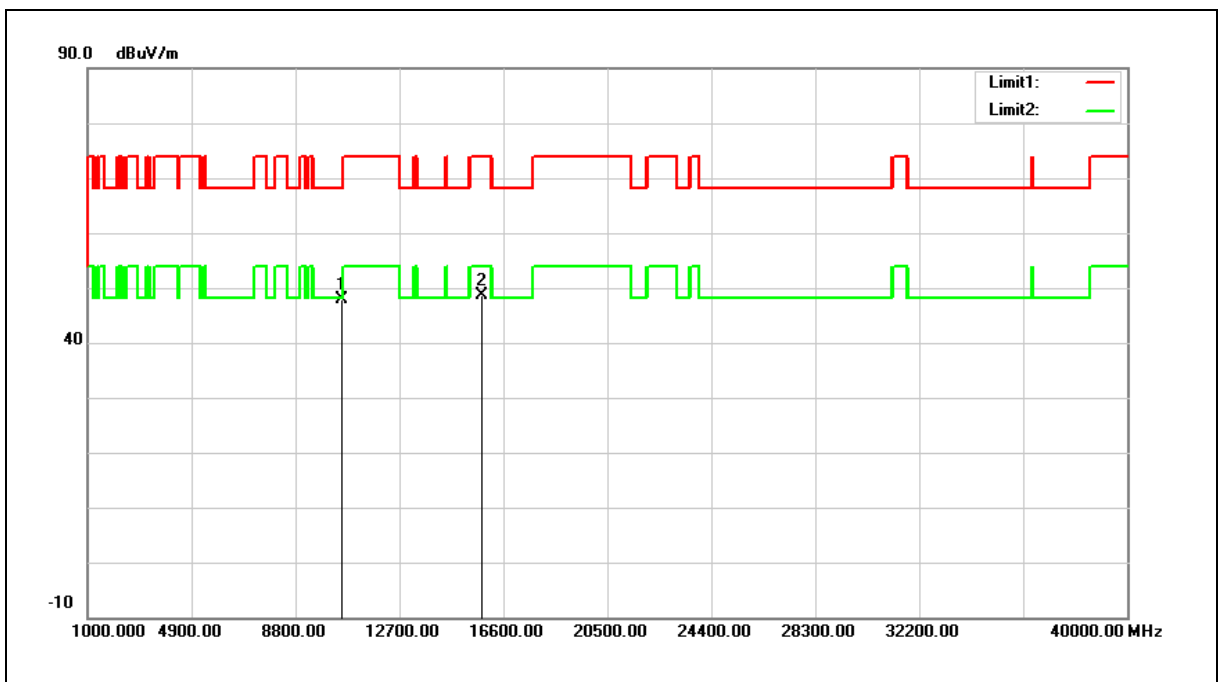


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10520.000	30.50	17.35	47.85	68.20	-20.35	peak
2	15780.000	30.26	18.41	48.67	74.00	-25.33	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 110 V/60 Hz
Frequency:	5280 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 6		
Ant.Polar.:	Horizontal		

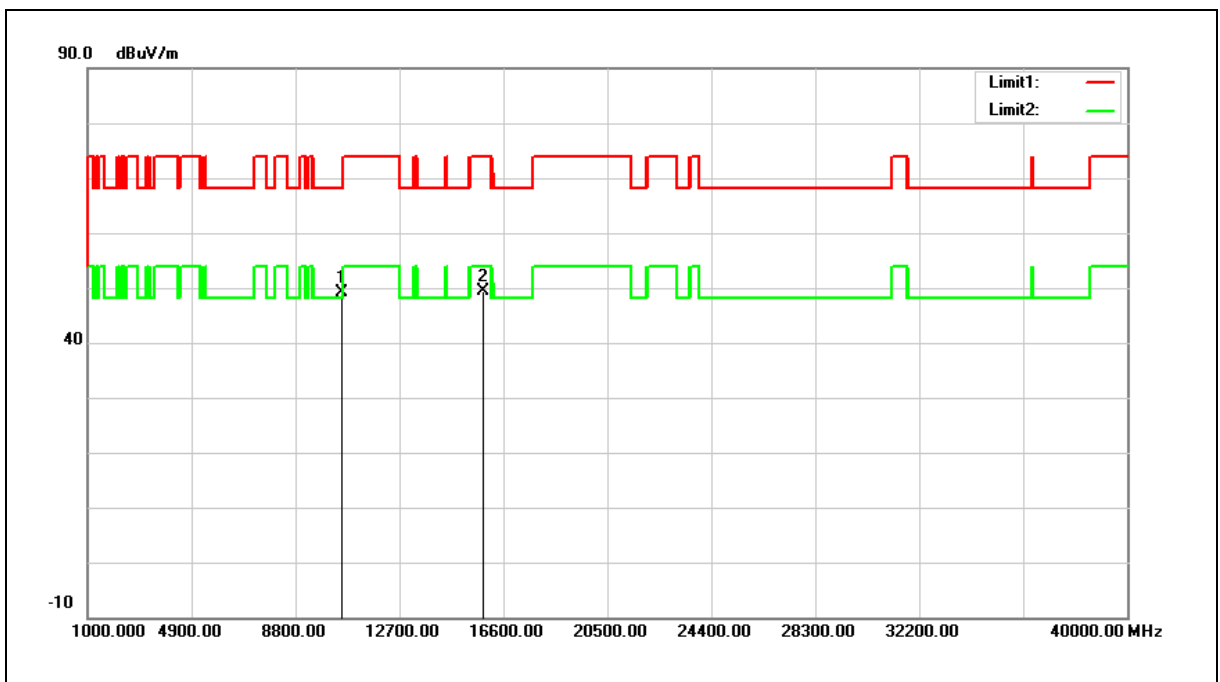


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10560.000	31.61	17.44	49.05	68.20	-19.15	peak
2	15840.000	31.09	18.26	49.35	74.00	-24.65	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 110 V/60 Hz
Frequency:	5280 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 6		
Ant.Polar.:	Vertical		

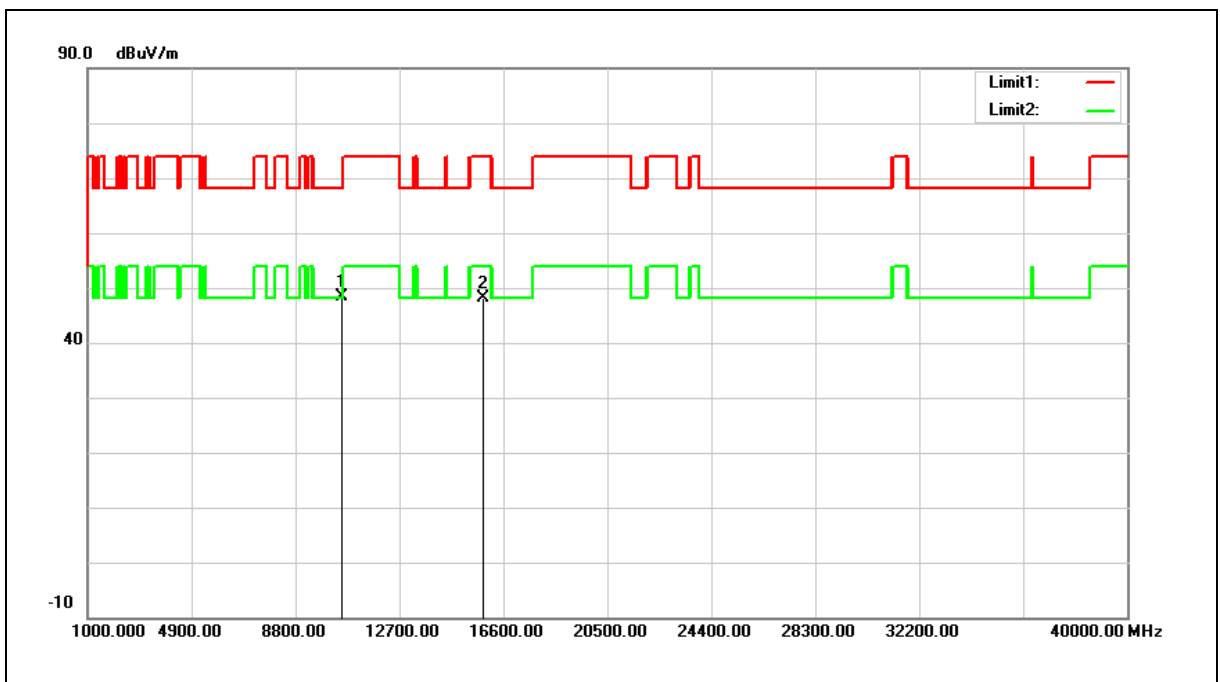


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10560.000	30.85	17.44	48.29	68.20	-19.91	peak
2	15840.000	29.95	18.26	48.21	74.00	-25.79	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 110 V/60 Hz
Frequency:	5320 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 6		
Ant.Polar.:	Horizontal		

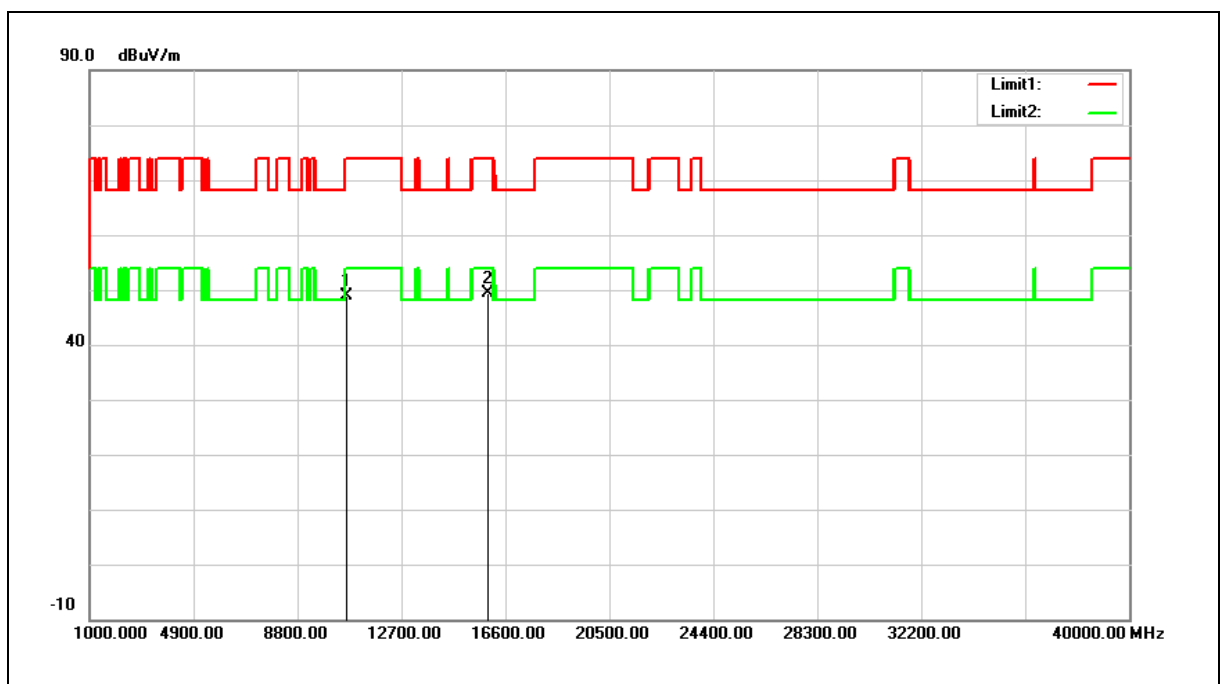


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10640.000	31.31	17.64	48.95	74.00	-25.05	peak
2	15960.000	31.35	17.95	49.30	74.00	-24.70	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 110 V/60 Hz
Frequency:	5320 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 6		
Ant.Polar.:	Vertical		

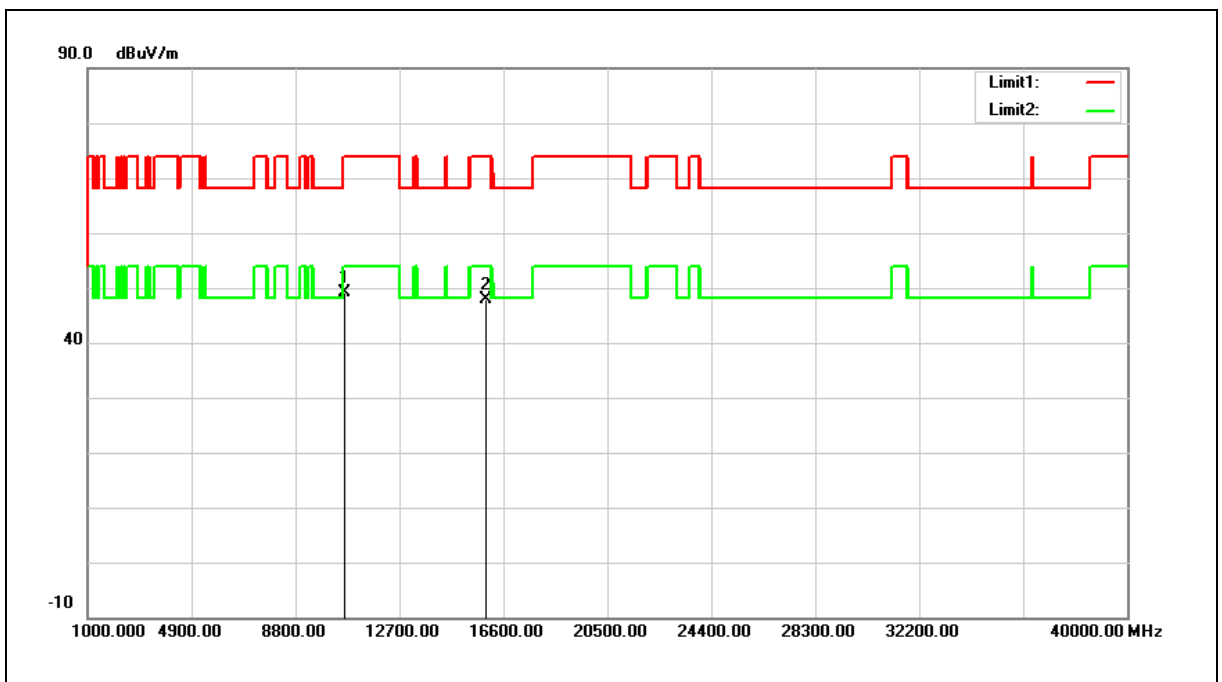


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10640.000	31.41	17.64	49.05	74.00	-24.95	peak
2	15960.000	29.98	17.95	47.93	74.00	-26.07	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 110 V/60 Hz
Frequency:	5500 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 6		
Ant.Polar.:	Horizontal		

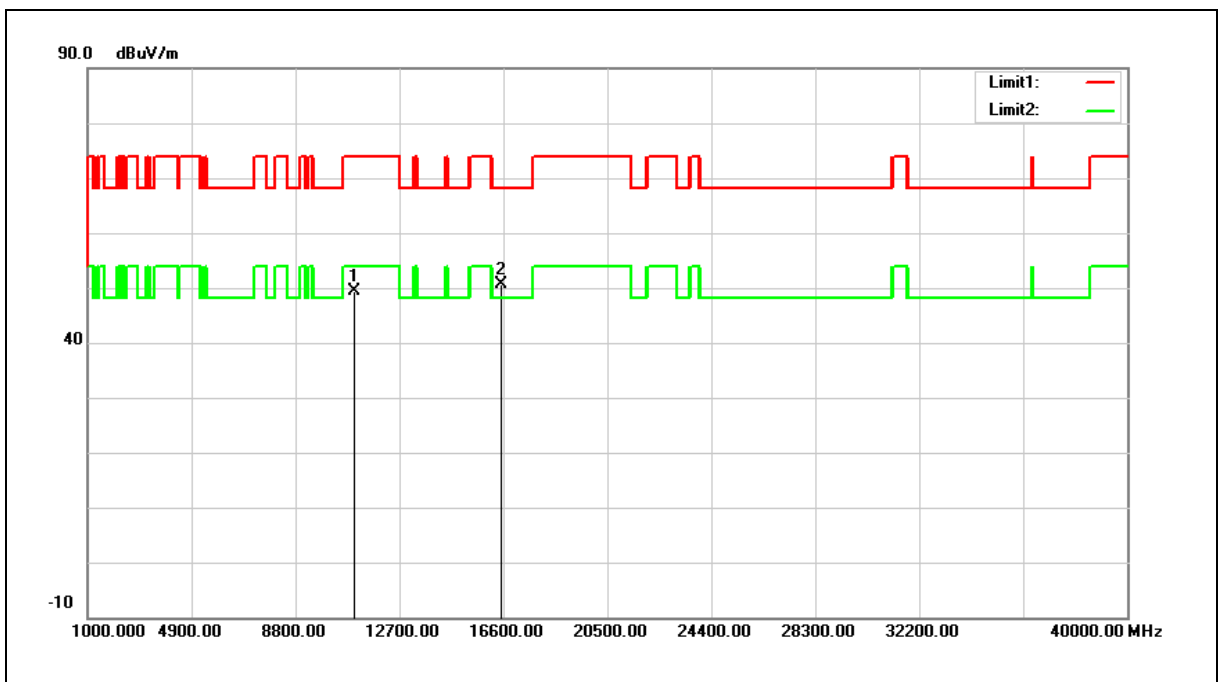


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11000.000	30.97	18.49	49.46	74.00	-24.54	peak
2	16500.000	29.85	20.78	50.63	68.20	-17.57	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 110 V/60 Hz
Frequency:	5500 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 6		
Ant.Polar.:	Vertical		

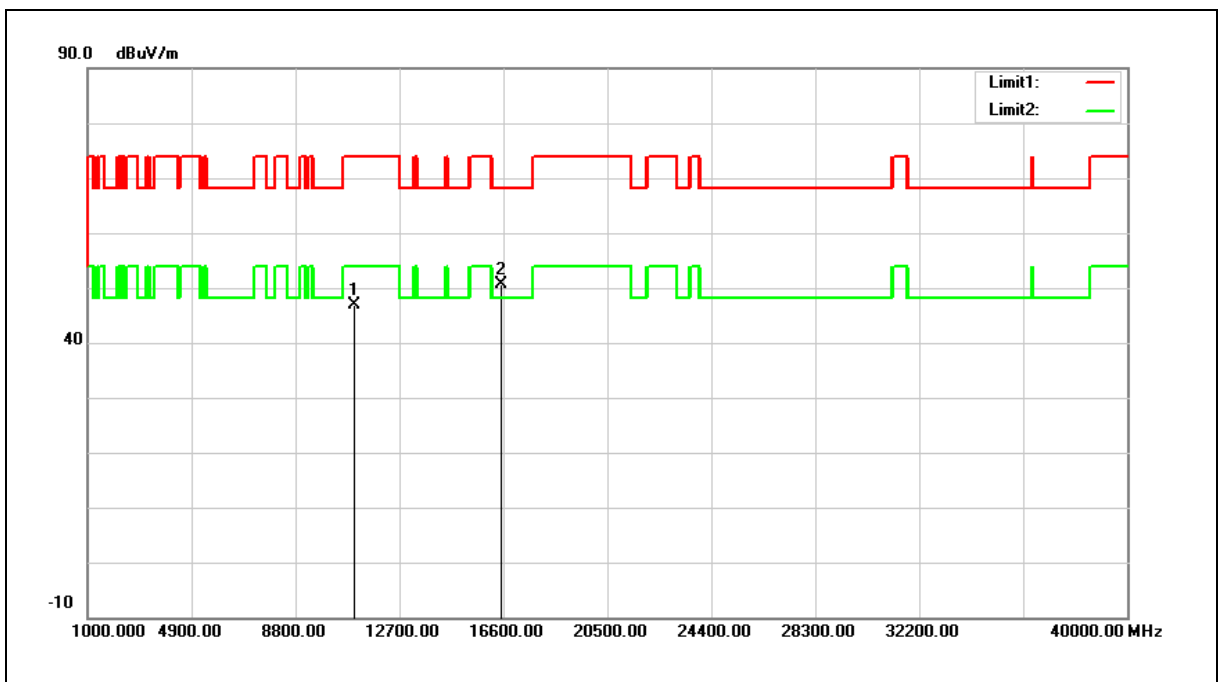


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11000.000	28.42	18.49	46.91	74.00	-27.09	peak
2	16500.000	29.79	20.78	50.57	68.20	-17.63	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 110 V/60 Hz
Frequency:	5560 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 6		
Ant.Polar.:	Horizontal		

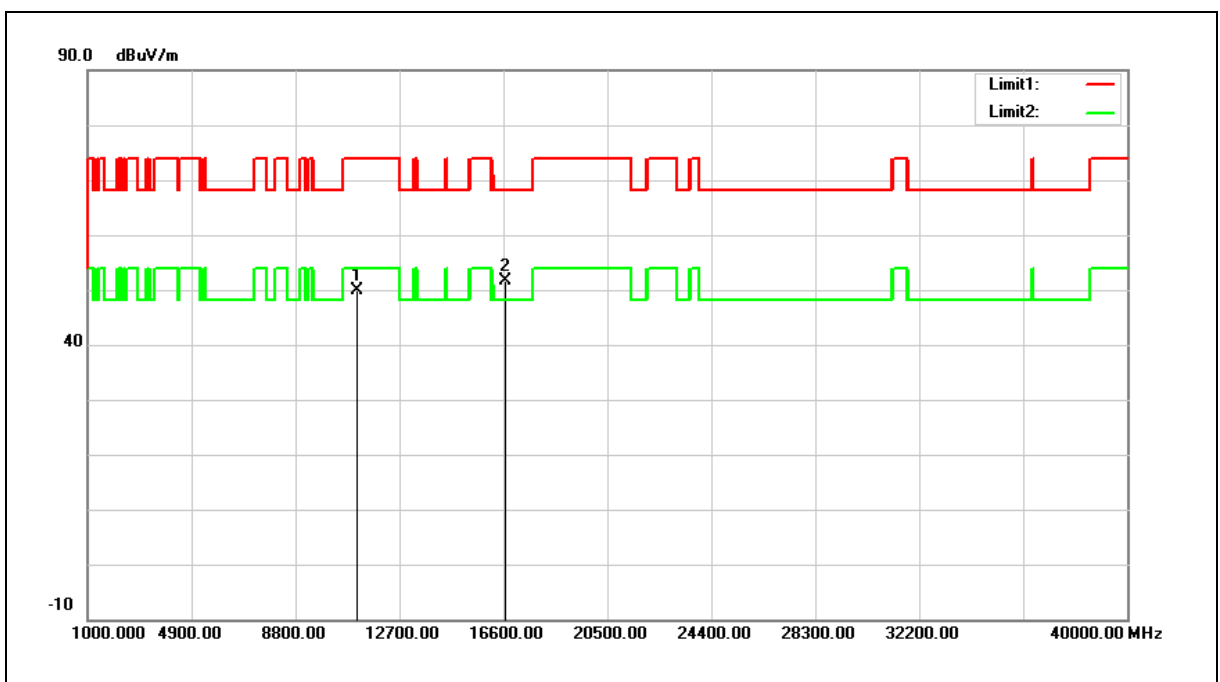


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11120.000	31.28	18.49	49.77	74.00	-24.23	peak
2	16680.000	30.03	21.66	51.69	68.20	-16.51	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 110 V/60 Hz
Frequency:	5560 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 6		
Ant.Polar.:	Vertical		

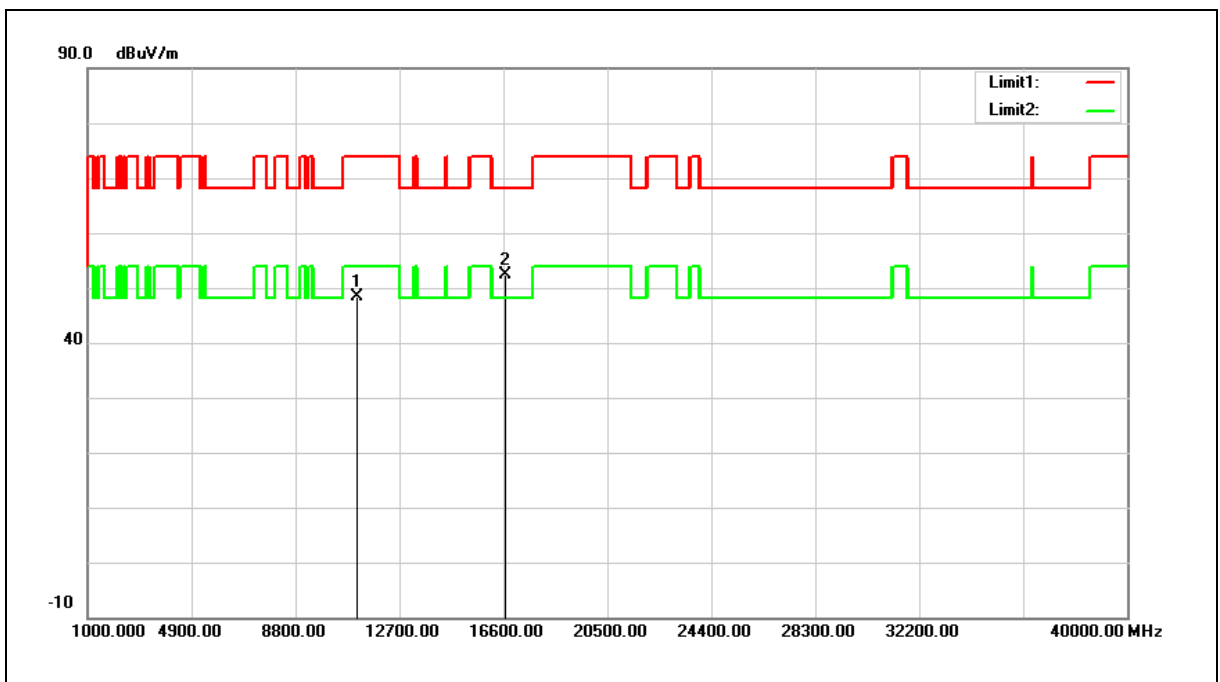


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11120.000	29.91	18.49	48.40	74.00	-25.60	peak
2	16680.000	30.77	21.66	52.43	68.20	-15.77	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 110 V/60 Hz
Frequency:	5700 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 6		
Ant.Polar.:	Horizontal		

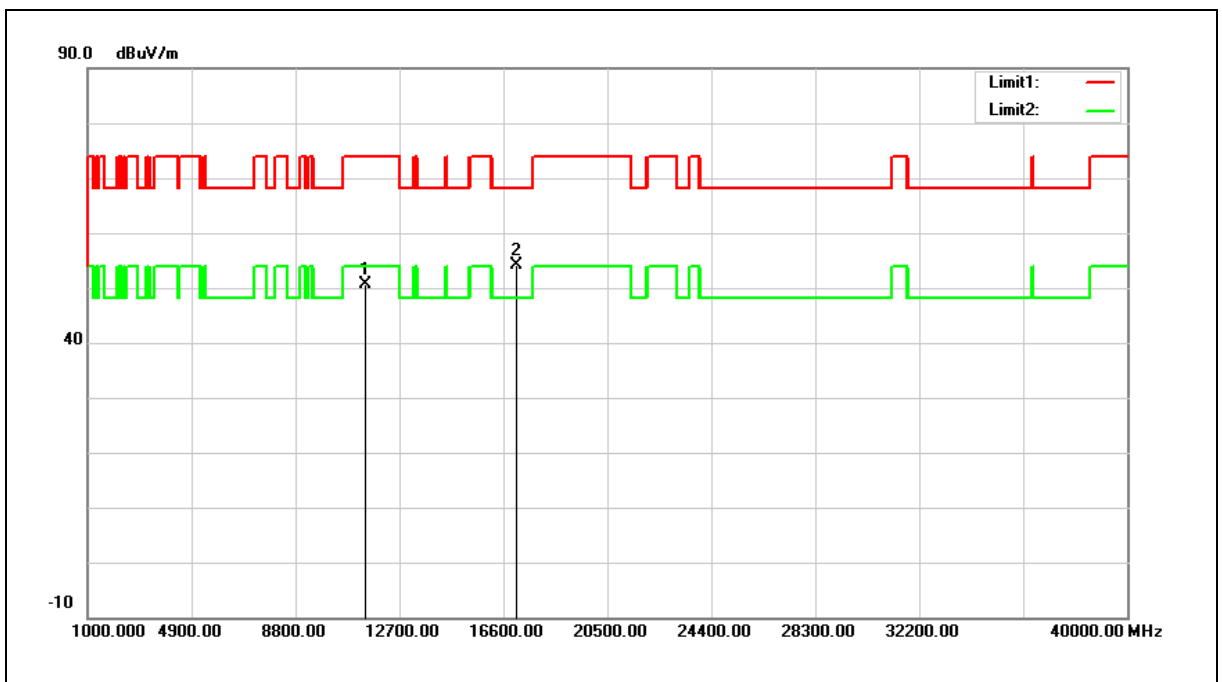


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11400.000	32.10	18.46	50.56	74.00	-23.44	peak
2	17100.000	30.39	23.62	54.01	68.20	-14.19	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 110 V/60 Hz
Frequency:	5700 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 6		
Ant.Polar.:	Vertical		

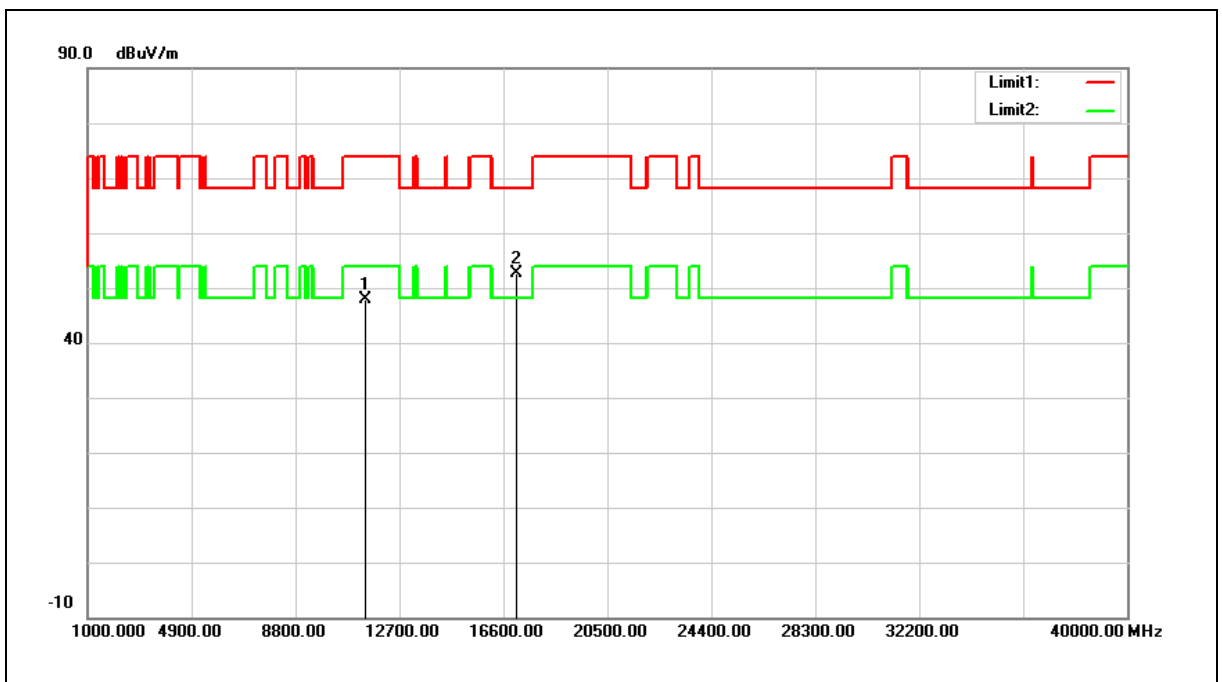


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11400.000	29.51	18.46	47.97	74.00	-26.03	peak
2	17100.000	29.05	23.62	52.67	68.20	-15.53	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 110 V/60 Hz
Frequency:	5745 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 6		
Ant.Polar.:	Horizontal		

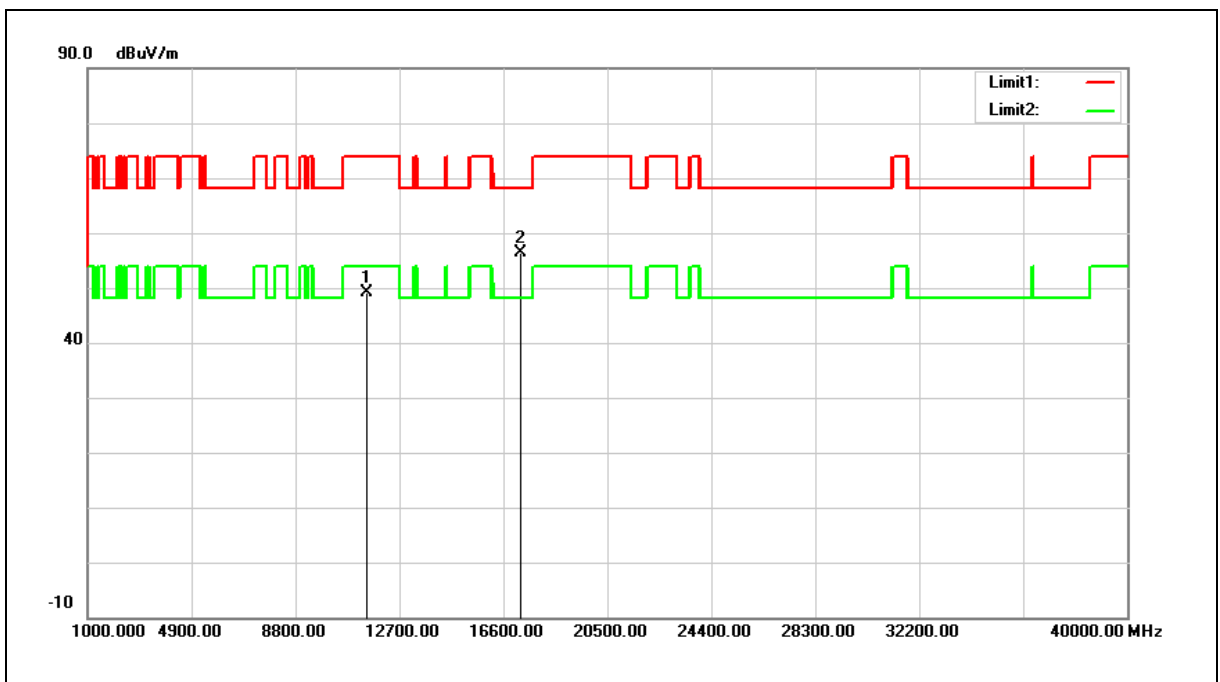


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11490.000	30.55	18.46	49.01	74.00	-24.99	peak
2	17235.000	32.24	24.18	56.42	68.20	-11.78	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 110 V/60 Hz
Frequency:	5745 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 6		
Ant.Polar.:	Vertical		

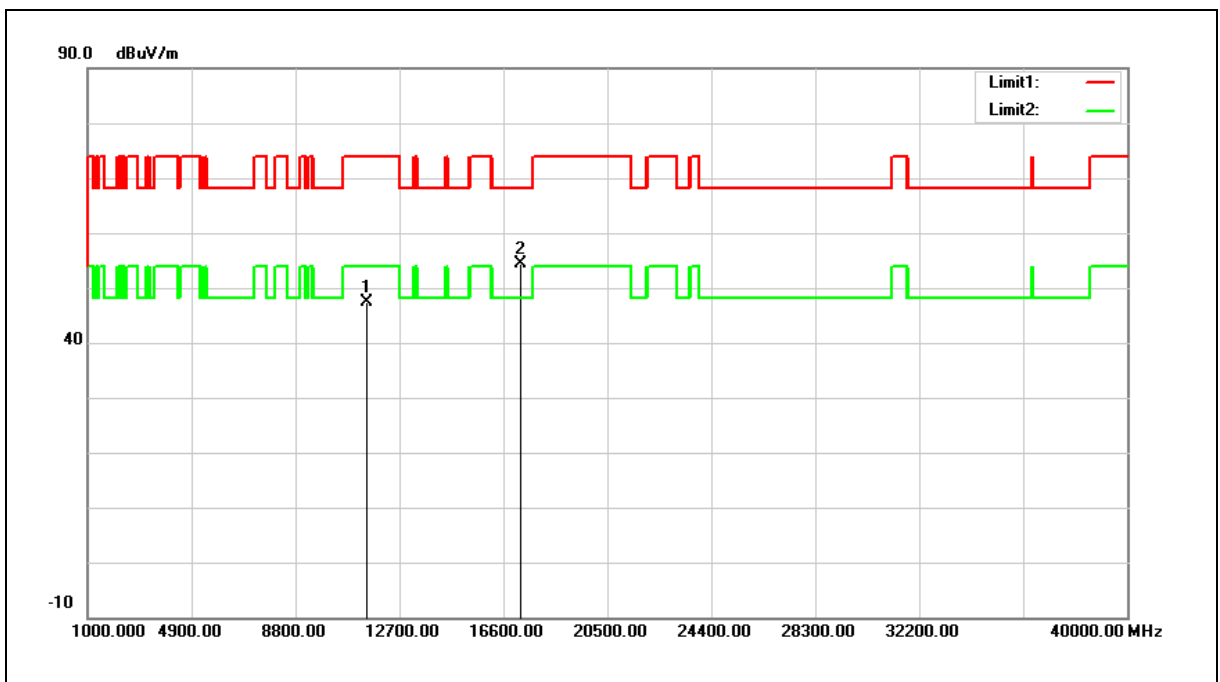


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11490.000	28.90	18.46	47.36	74.00	-26.64	peak
2	17235.000	30.22	24.18	54.40	68.20	-13.80	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 110 V/60 Hz
Frequency:	5785 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 6		
Ant.Polar.:	Horizontal		

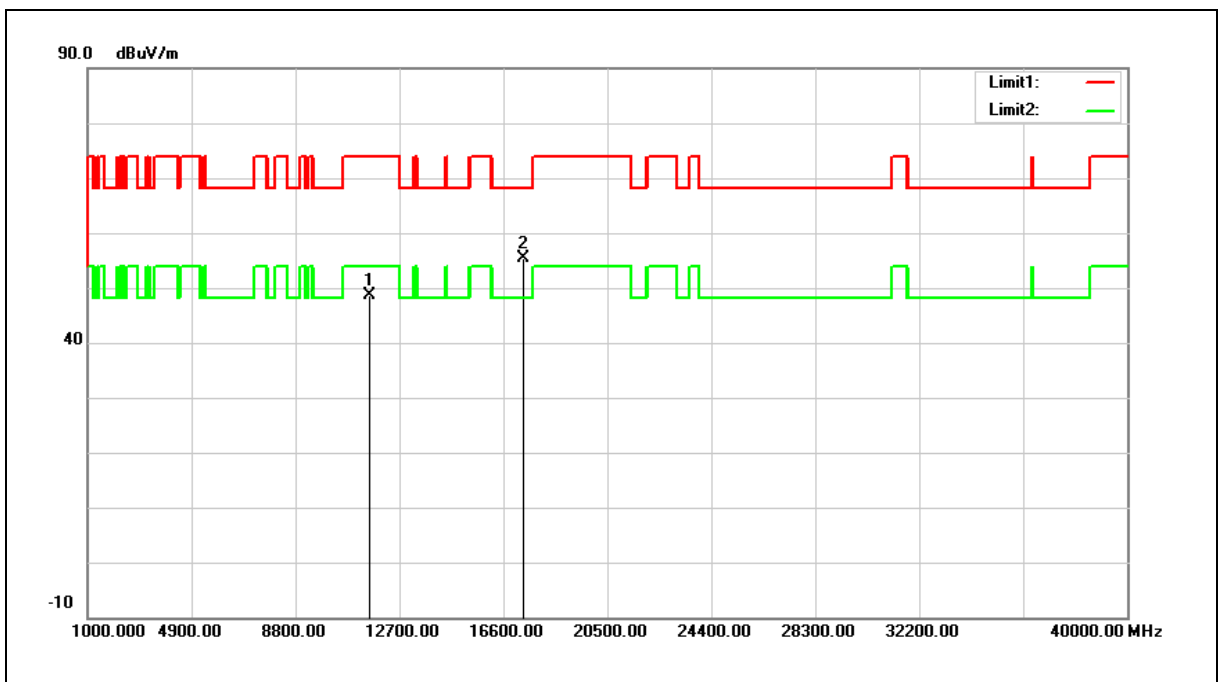


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11570.000	30.19	18.37	48.56	74.00	-25.44	peak
2	17355.000	30.58	24.68	55.26	68.20	-12.94	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 110 V/60 Hz
Frequency:	5785 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 6		
Ant.Polar.:	Vertical		

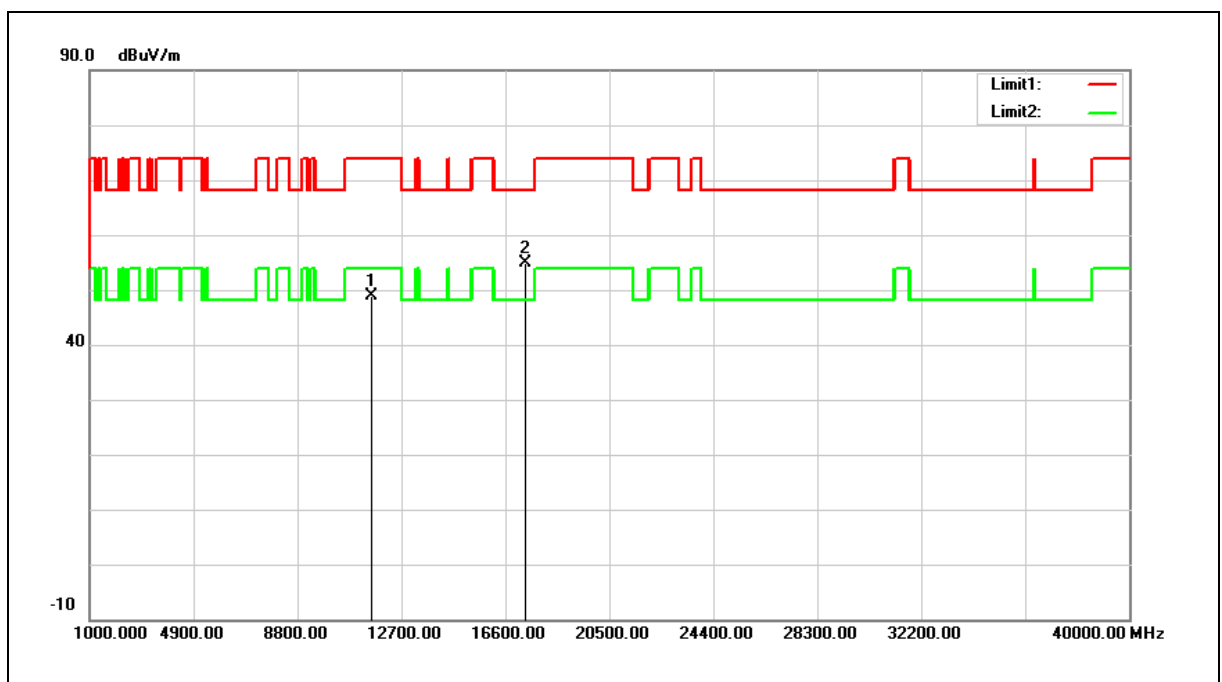


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11570.000	30.44	18.37	48.81	74.00	-25.19	peak
2	17355.000	30.24	24.68	54.92	68.20	-13.28	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 110 V/60 Hz
Frequency:	5825 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 6		
Ant.Polar.:	Horizontal		

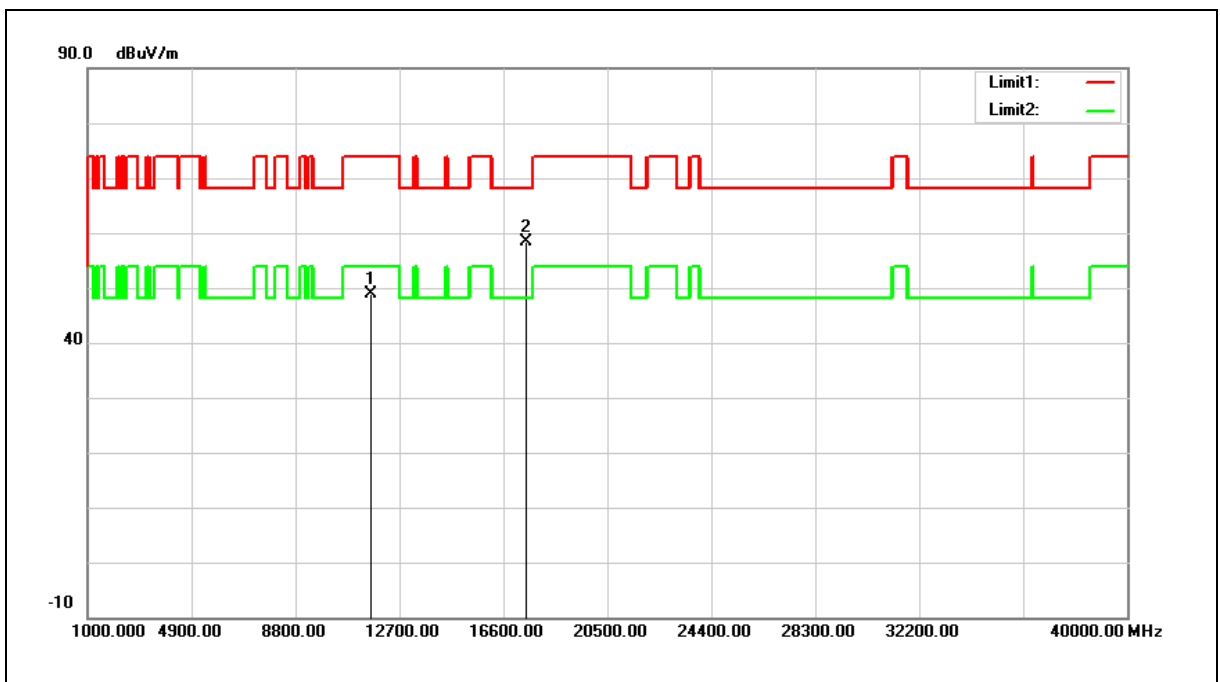


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11650.000	30.70	18.28	48.98	74.00	-25.02	peak
2	17475.000	33.26	25.18	58.44	68.20	-9.76	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 110 V/60 Hz
Frequency:	5825 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 6		
Ant.Polar.:	Vertical		

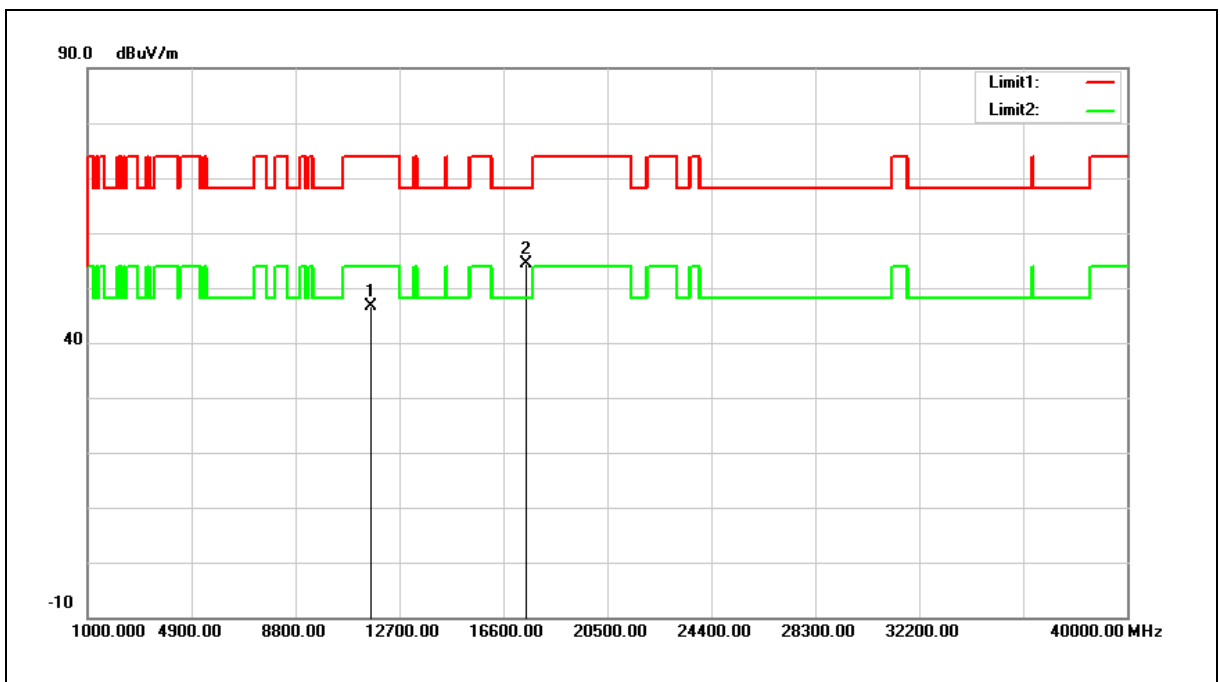


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11650.000	28.42	18.28	46.70	74.00	-27.30	peak
2	17475.000	29.25	25.18	54.43	68.20	-13.77	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 110 V/60 Hz
Frequency:	5180 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 9		
Ant.Polar.:	Horizontal		

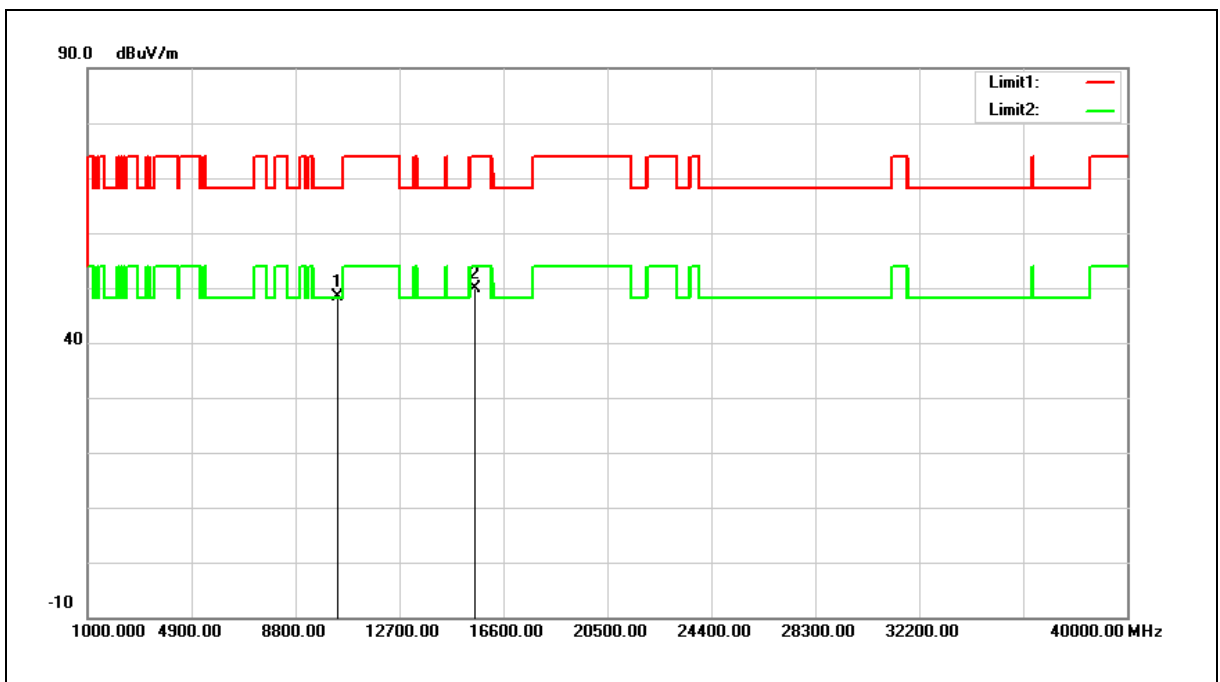


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10360.000	31.63	16.79	48.42	68.20	-19.78	peak
2	15540.000	30.76	19.03	49.79	74.00	-24.21	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 110 V/60 Hz
Frequency:	5180 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 9		
Ant.Polar.:	Vertical		

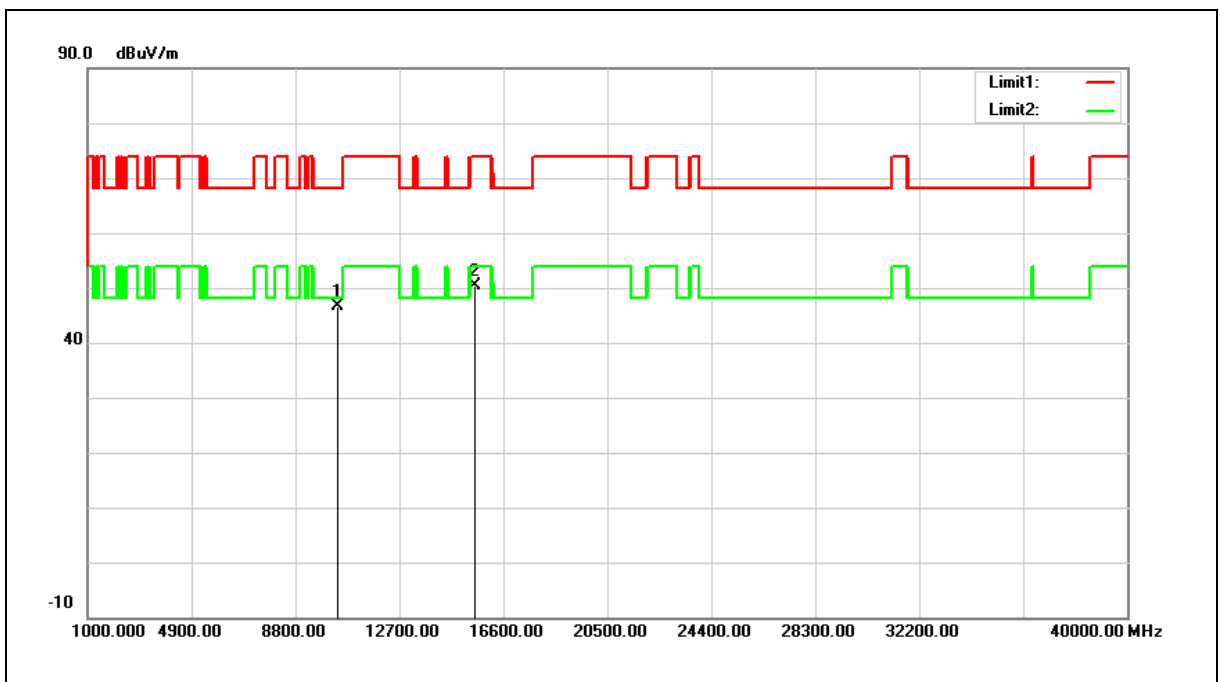


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10360.000	29.94	16.79	46.73	68.20	-21.47	peak
2	15540.000	31.46	19.03	50.49	74.00	-23.51	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 110 V/60 Hz
Frequency:	5200 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 9		
Ant.Polar.:	Horizontal		

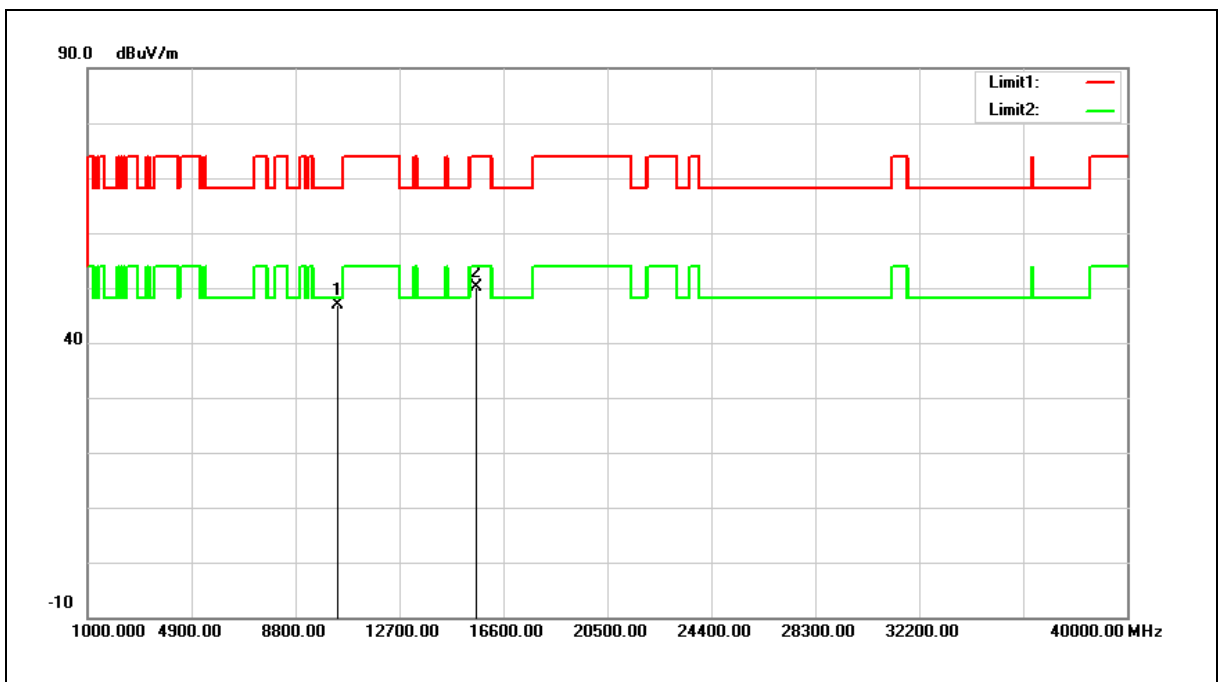


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10400.000	30.03	16.94	46.97	68.20	-21.23	peak
2	15600.000	31.16	18.87	50.03	74.00	-23.97	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 110 V/60 Hz
Frequency:	5200 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 9		
Ant.Polar.:	Vertical		

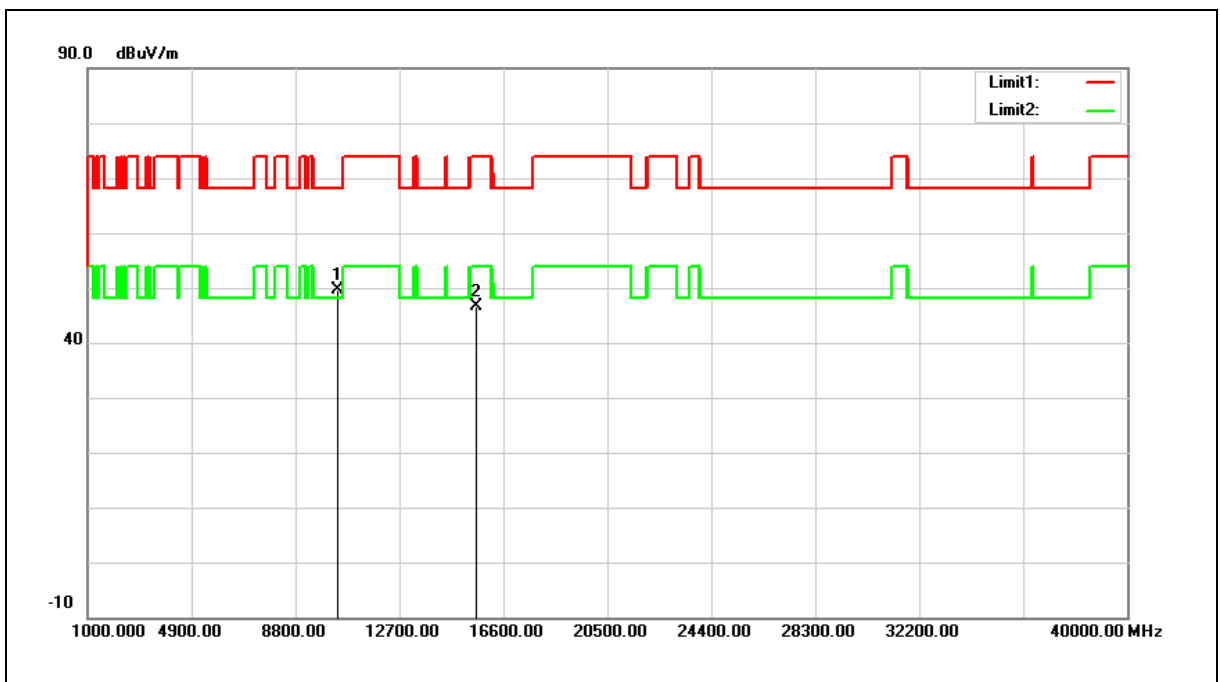


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10400.000	32.64	16.94	49.58	68.20	-18.62	peak
2	15600.000	27.64	18.87	46.51	74.00	-27.49	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 110 V/60 Hz
Frequency:	5240 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 9		
Ant.Polar.:	Horizontal		

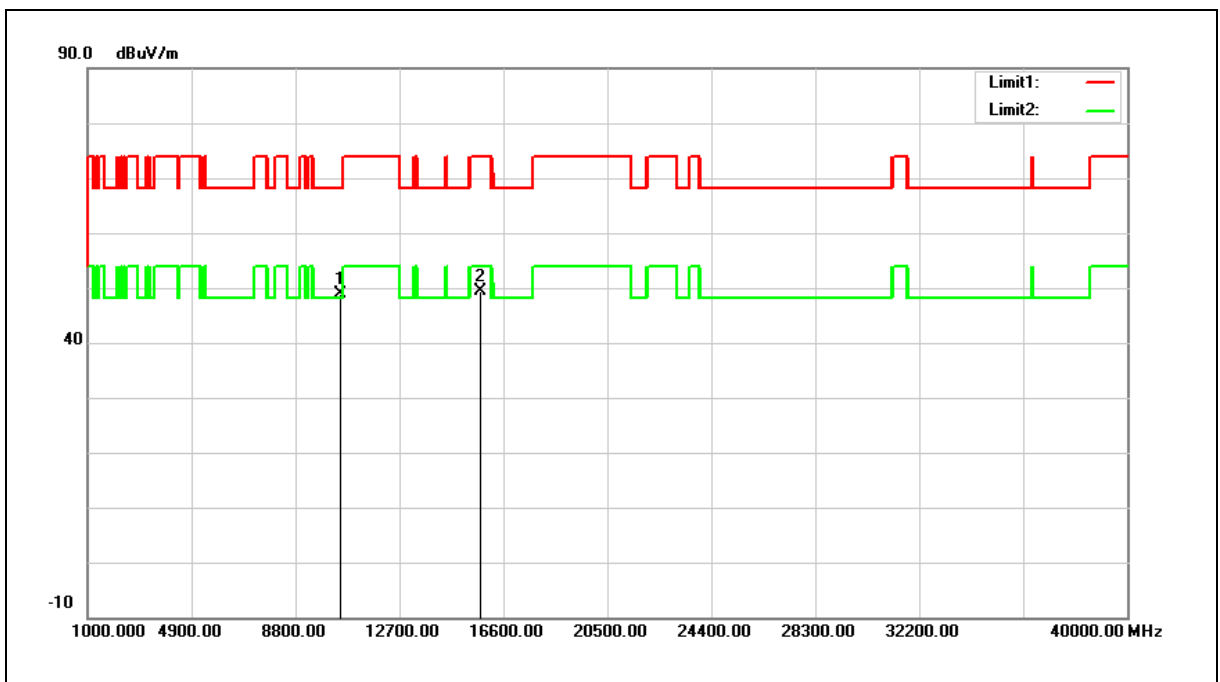


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10480.000	31.56	17.23	48.79	68.20	-19.41	peak
2	15720.000	30.75	18.57	49.32	74.00	-24.68	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 110 V/60 Hz
Frequency:	5240 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 9		
Ant.Polar.:	Vertical		

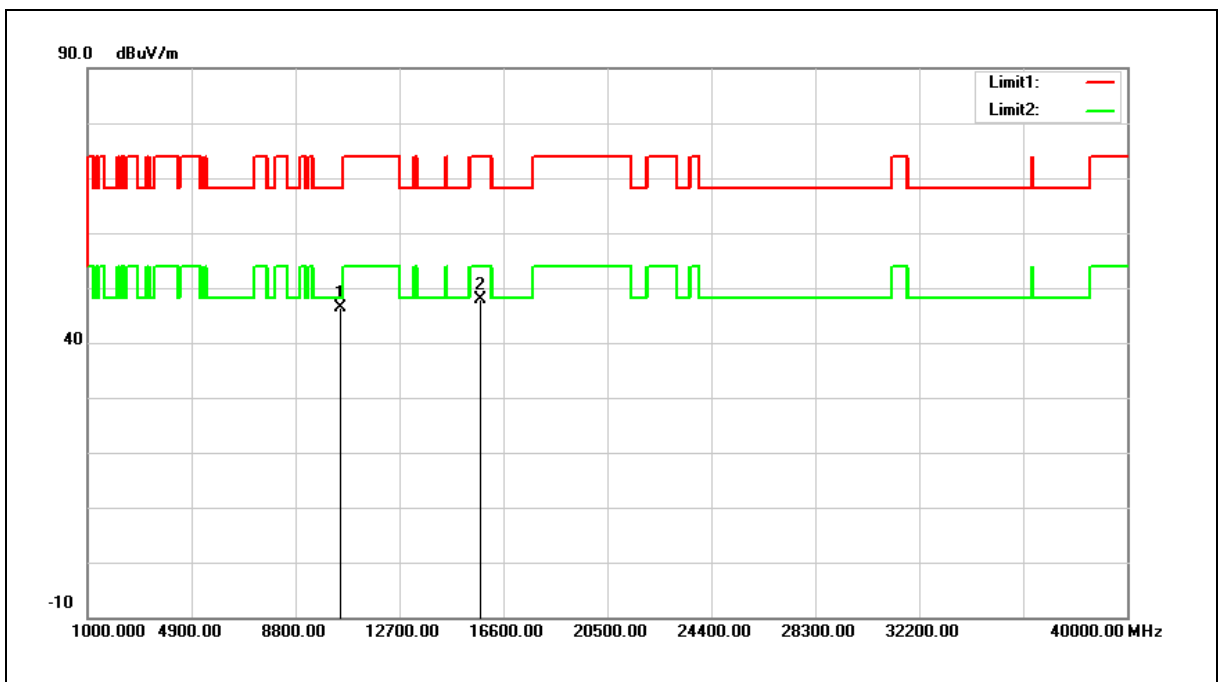


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10480.000	29.16	17.23	46.39	68.20	-21.81	peak
2	15720.000	29.37	18.57	47.94	74.00	-26.06	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 110 V/60 Hz
Frequency:	5260 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 9		
Ant.Polar.:	Horizontal		

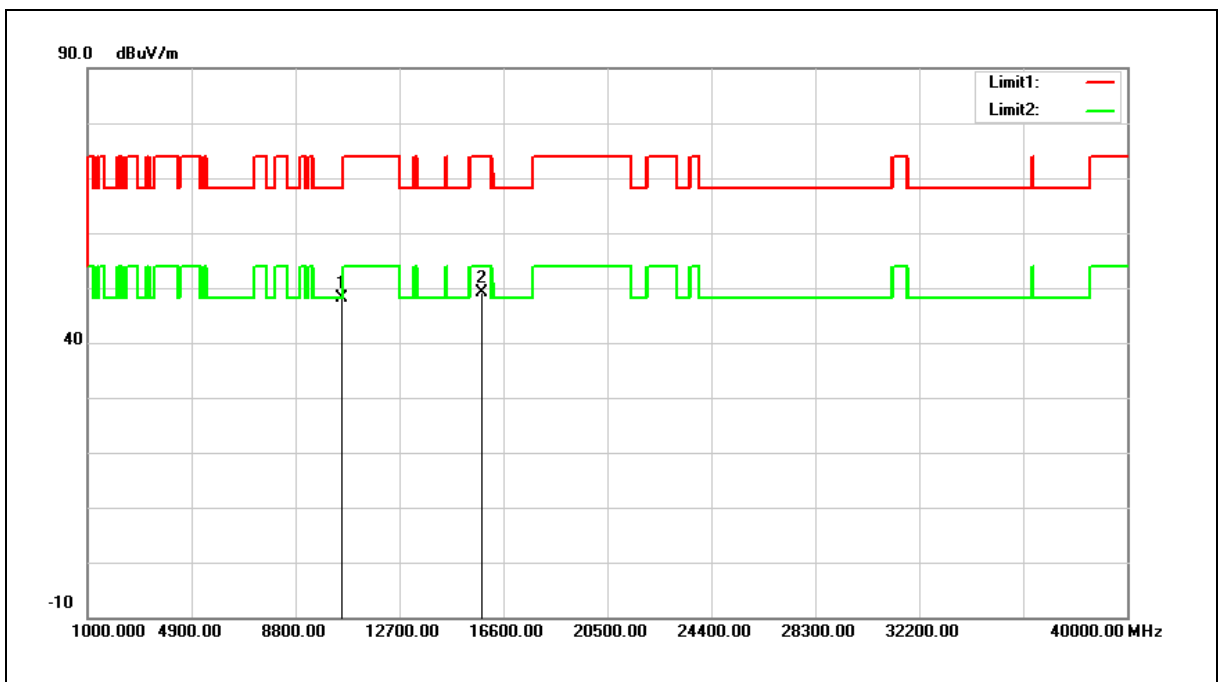


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10520.000	30.86	17.35	48.21	68.20	-19.99	peak
2	15780.000	30.68	18.41	49.09	74.00	-24.91	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 110 V/60 Hz
Frequency:	5260 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 9		
Ant.Polar.:	Vertical		

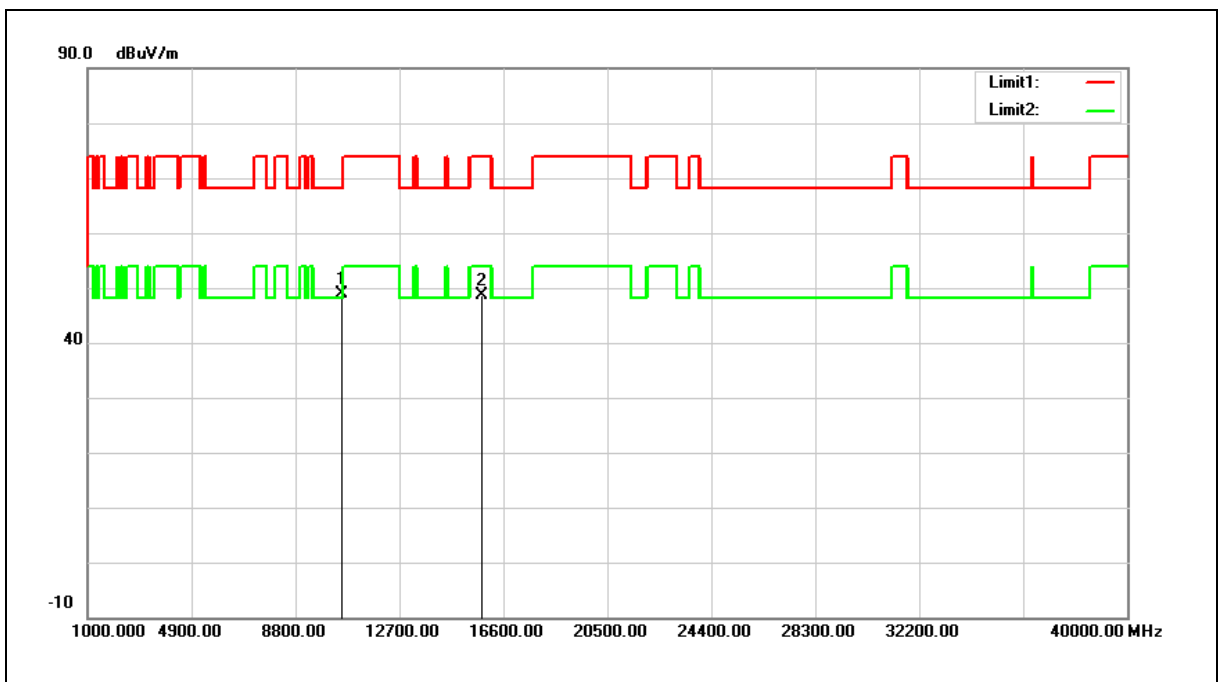


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10520.000	31.59	17.35	48.94	68.20	-19.26	peak
2	15780.000	30.16	18.41	48.57	74.00	-25.43	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 110 V/60 Hz
Frequency:	5280 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 9		
Ant.Polar.:	Horizontal		

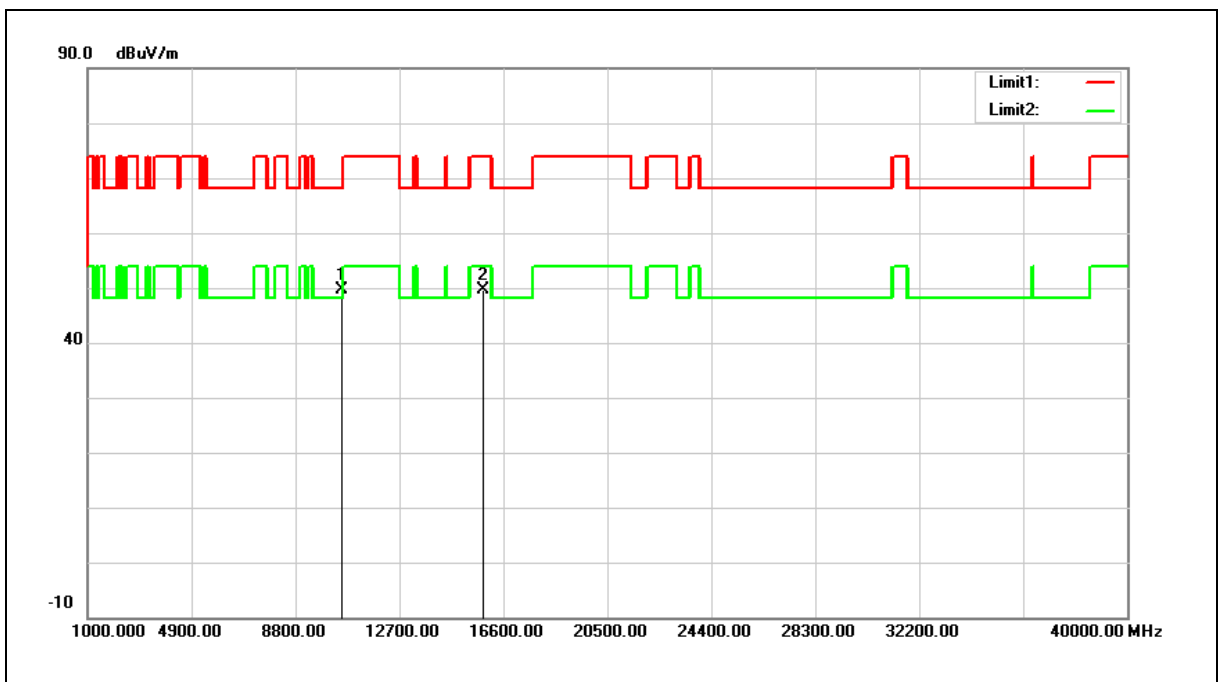


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10560.000	32.12	17.44	49.56	68.20	-18.64	peak
2	15840.000	31.47	18.26	49.73	74.00	-24.27	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 110 V/60 Hz
Frequency:	5280 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 9		
Ant.Polar.:	Vertical		

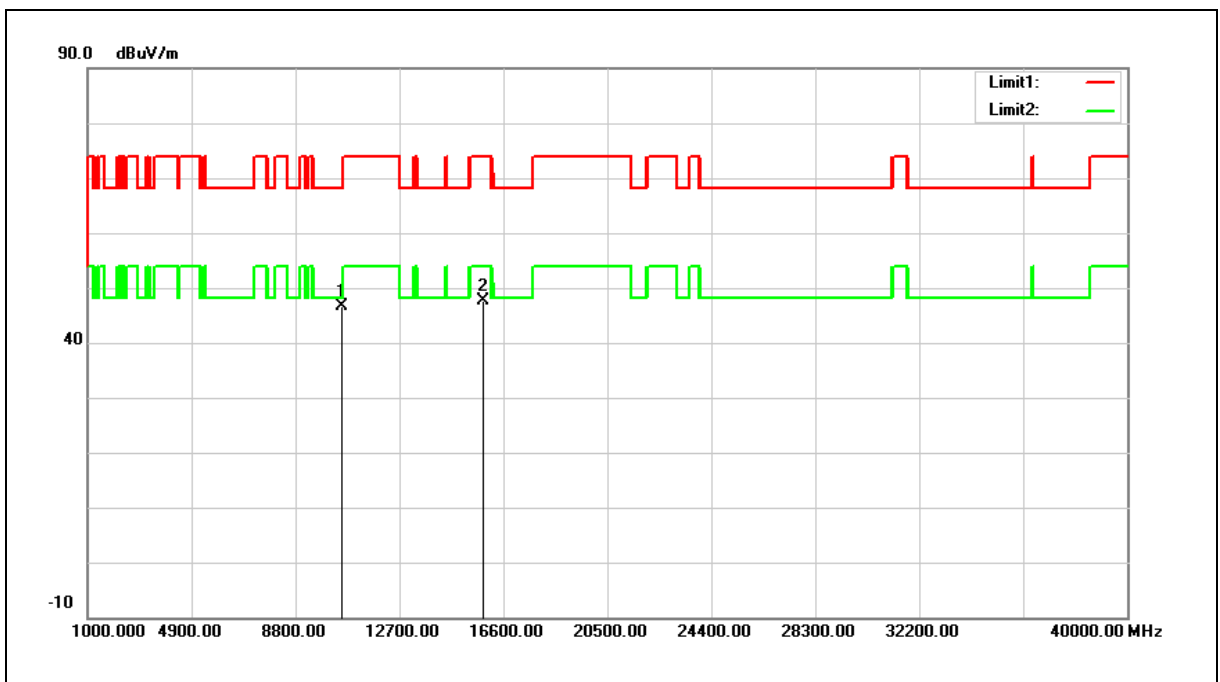


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10560.000	29.15	17.44	46.59	68.20	-21.61	peak
2	15840.000	29.47	18.26	47.73	74.00	-26.27	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 110 V/60 Hz
Frequency:	5320 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 9		
Ant.Polar.:	Horizontal		

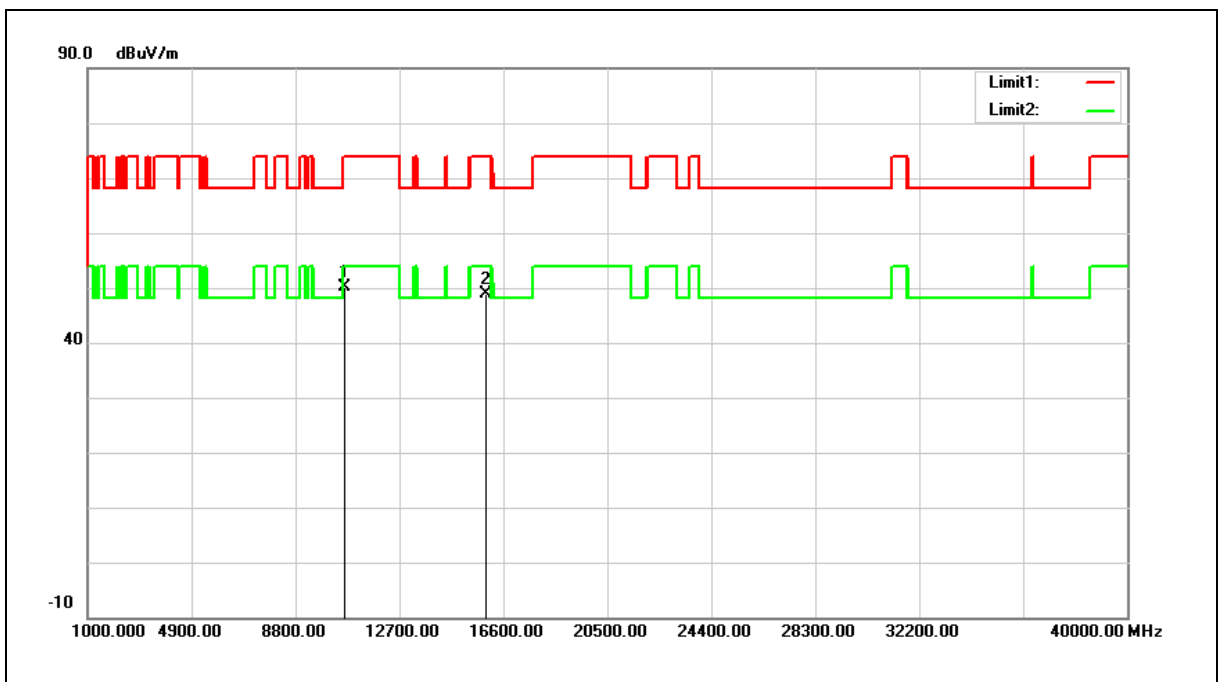


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10640.000	32.60	17.64	50.24	74.00	-23.76	peak
2	15960.000	30.95	17.95	48.90	74.00	-25.10	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 110 V/60 Hz
Frequency:	5320 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 9		
Ant.Polar.:	Vertical		

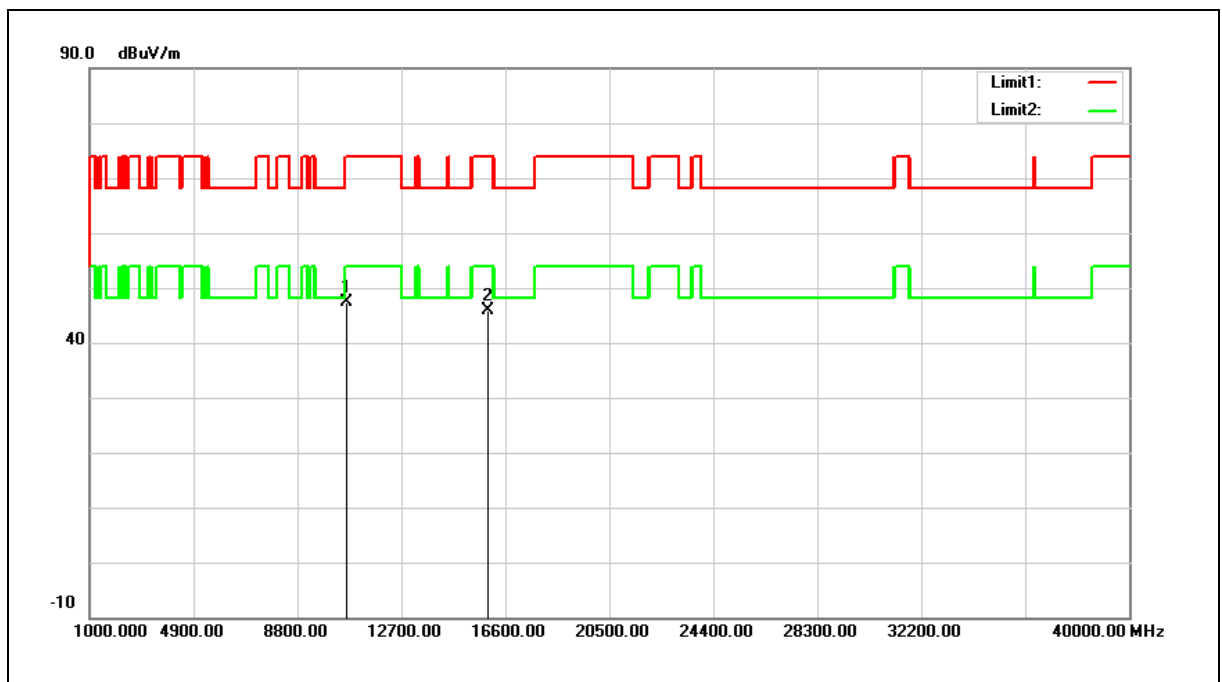


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10640.000	29.71	17.64	47.35	74.00	-26.65	peak
2	15960.000	28.04	17.95	45.99	74.00	-28.01	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 110 V/60 Hz
Frequency:	5500 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 9		
Ant.Polar.:	Horizontal		

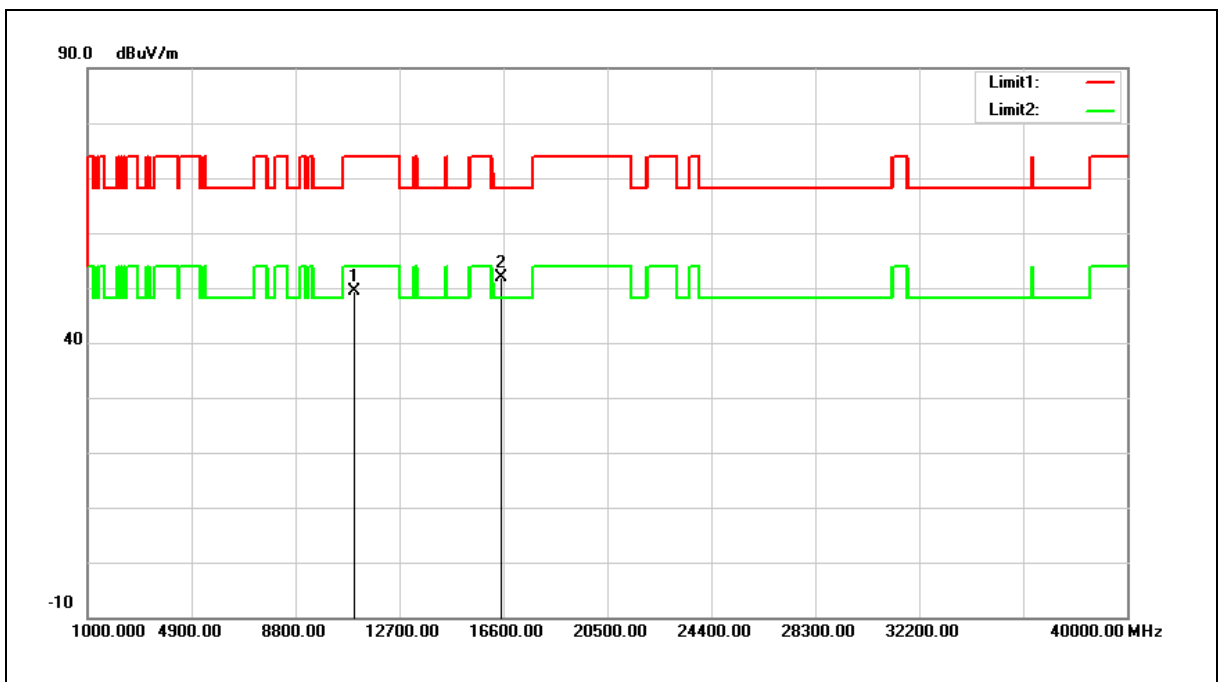


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11000.000	30.93	18.49	49.42	74.00	-24.58	peak
2	16500.000	31.08	20.78	51.86	68.20	-16.34	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 110 V/60 Hz
Frequency:	5500 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 9		
Ant.Polar.:	Vertical		

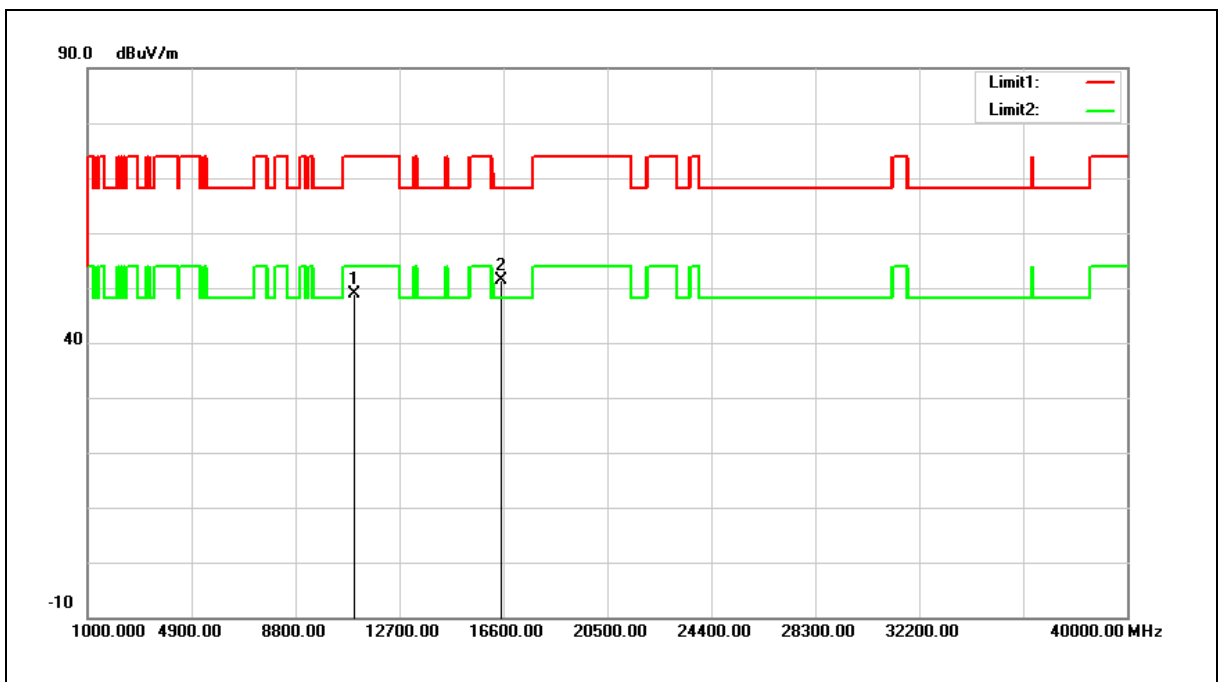


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11000.000	30.46	18.49	48.95	74.00	-25.05	peak
2	16500.000	30.55	20.78	51.33	68.20	-16.87	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 110 V/60 Hz
Frequency:	5560 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 9		
Ant.Polar.:	Horizontal		

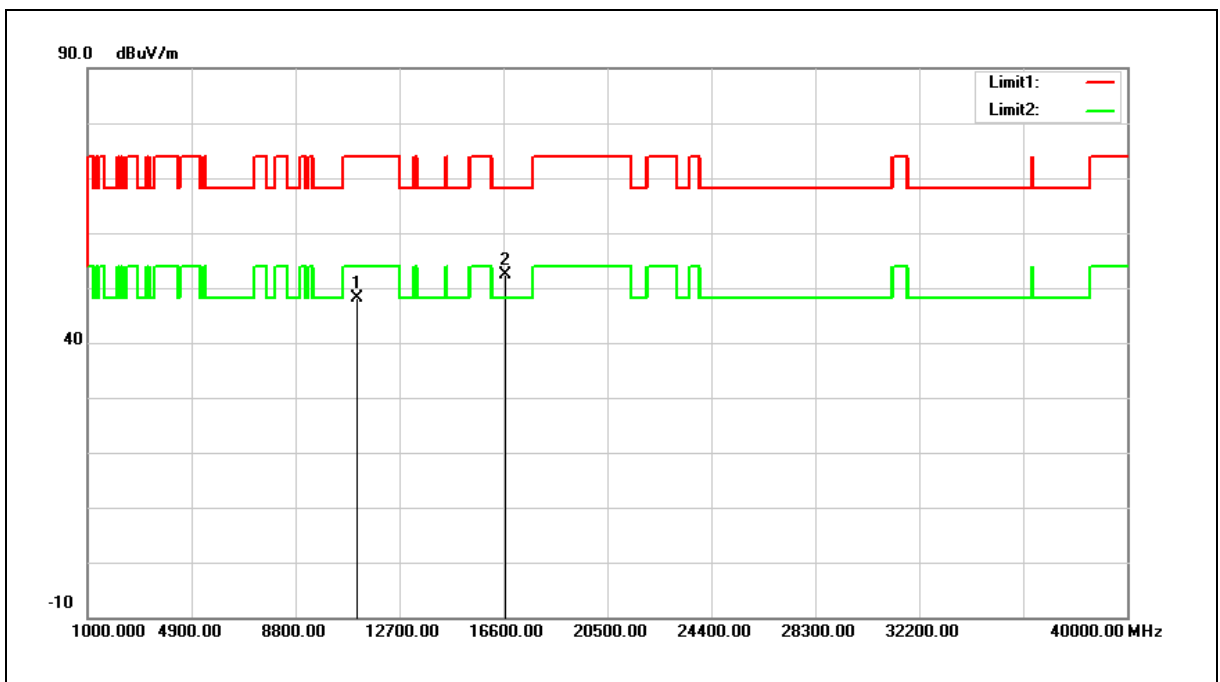


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11120.000	29.57	18.49	48.06	74.00	-25.94	peak
2	16680.000	30.61	21.66	52.27	68.20	-15.93	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 110 V/60 Hz
Frequency:	5560 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 9		
Ant.Polar.:	Vertical		

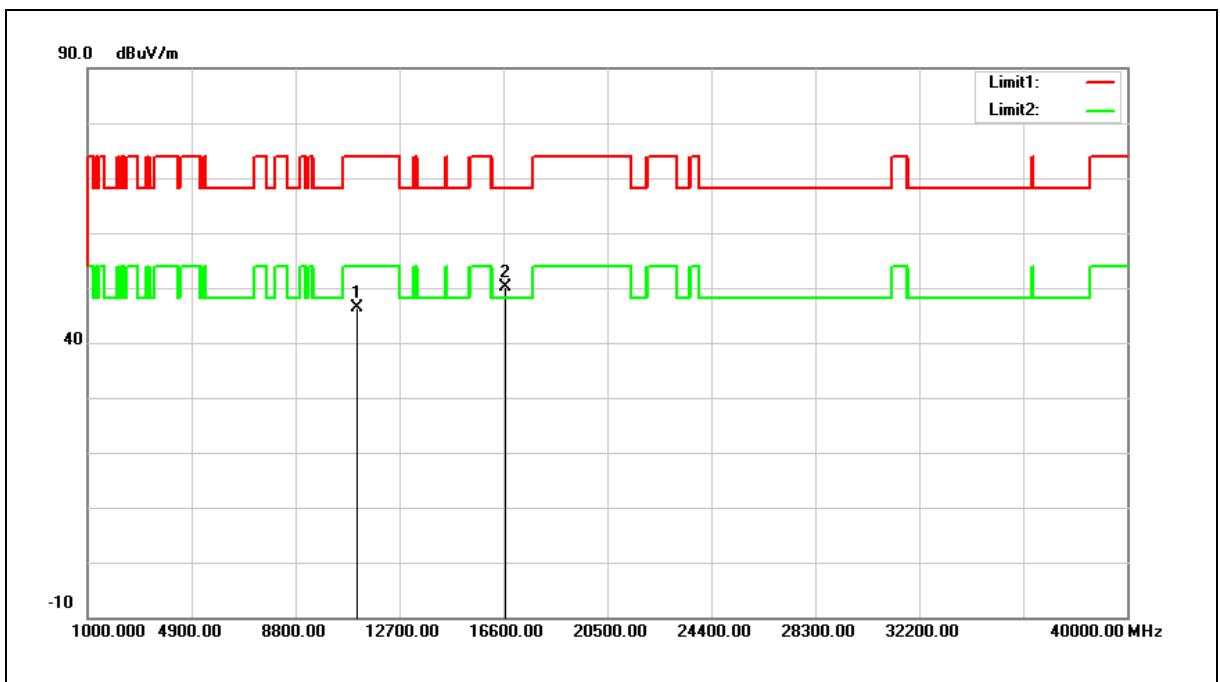


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11120.000	27.95	18.49	46.44	74.00	-27.56	peak
2	16680.000	28.50	21.66	50.16	68.20	-18.04	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 110 V/60 Hz
Frequency:	5700 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 9		
Ant.Polar.:	Horizontal		

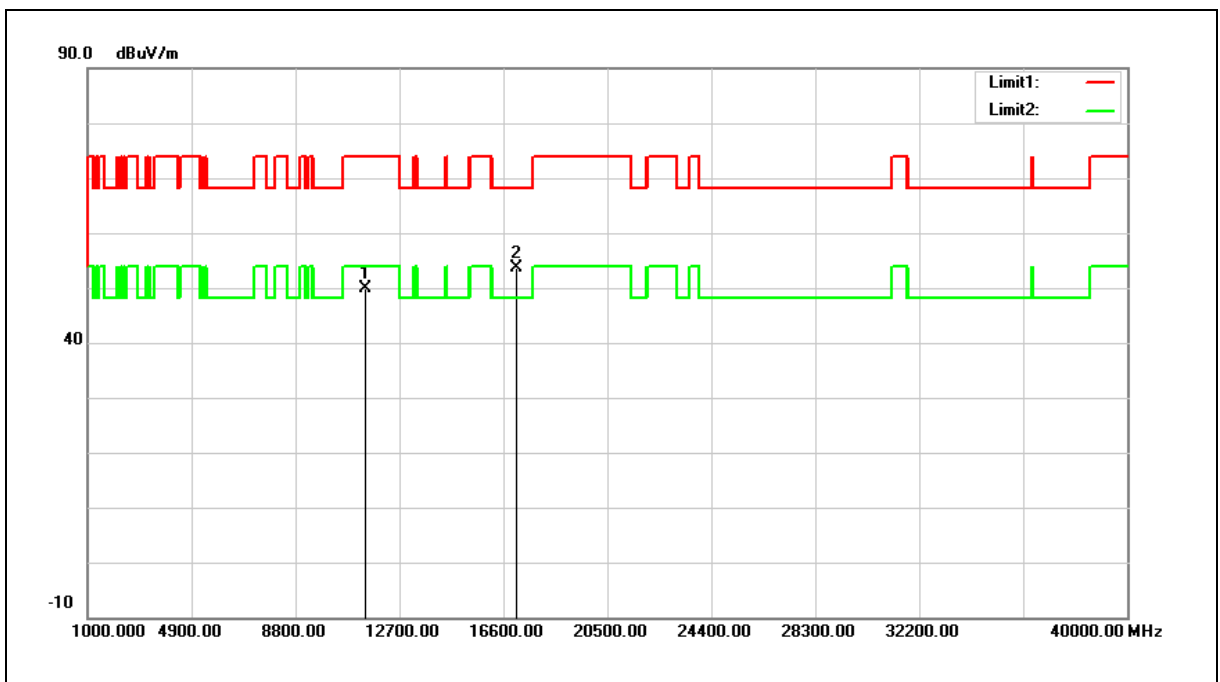


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11400.000	31.49	18.46	49.95	74.00	-24.05	peak
2	17100.000	30.01	23.62	53.63	68.20	-14.57	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 110 V/60 Hz
Frequency:	5700 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 9		
Ant.Polar.:	Vertical		

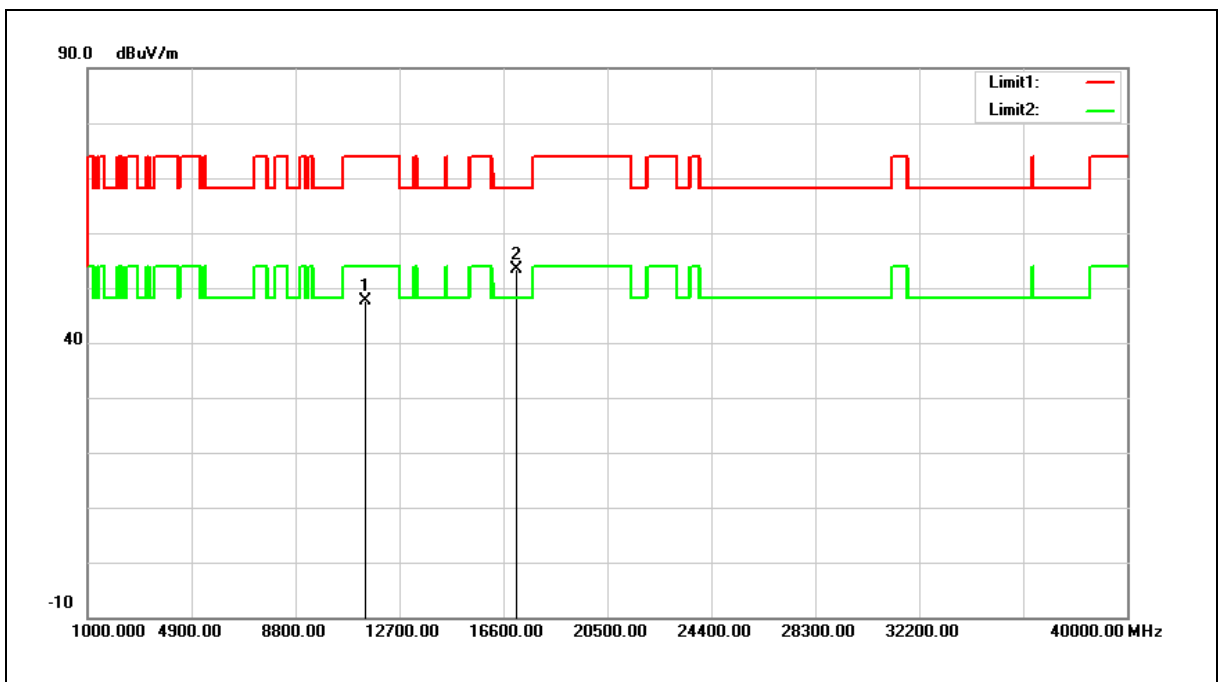


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11400.000	29.26	18.46	47.72	74.00	-26.28	peak
2	17100.000	29.64	23.62	53.26	68.20	-14.94	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 110 V/60 Hz
Frequency:	5745 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 9		
Ant.Polar.:	Horizontal		

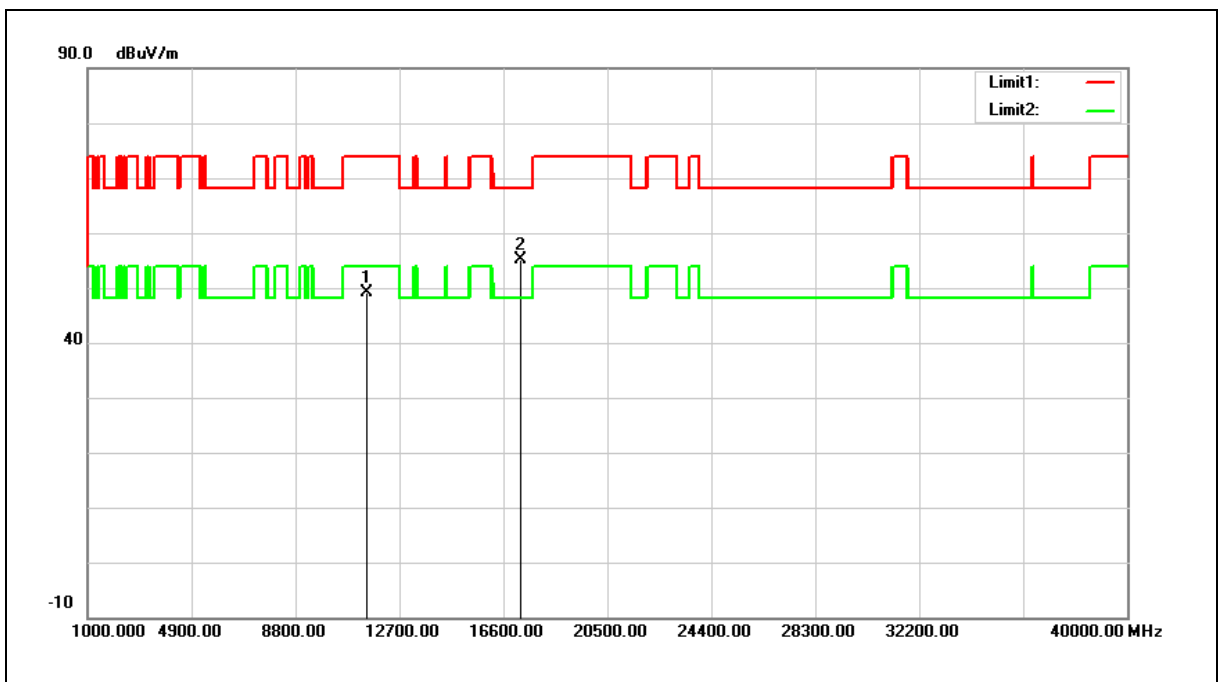


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11490.000	30.61	18.46	49.07	74.00	-24.93	peak
2	17235.000	30.91	24.18	55.09	68.20	-13.11	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 110 V/60 Hz
Frequency:	5745 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 9		
Ant.Polar.:	Vertical		

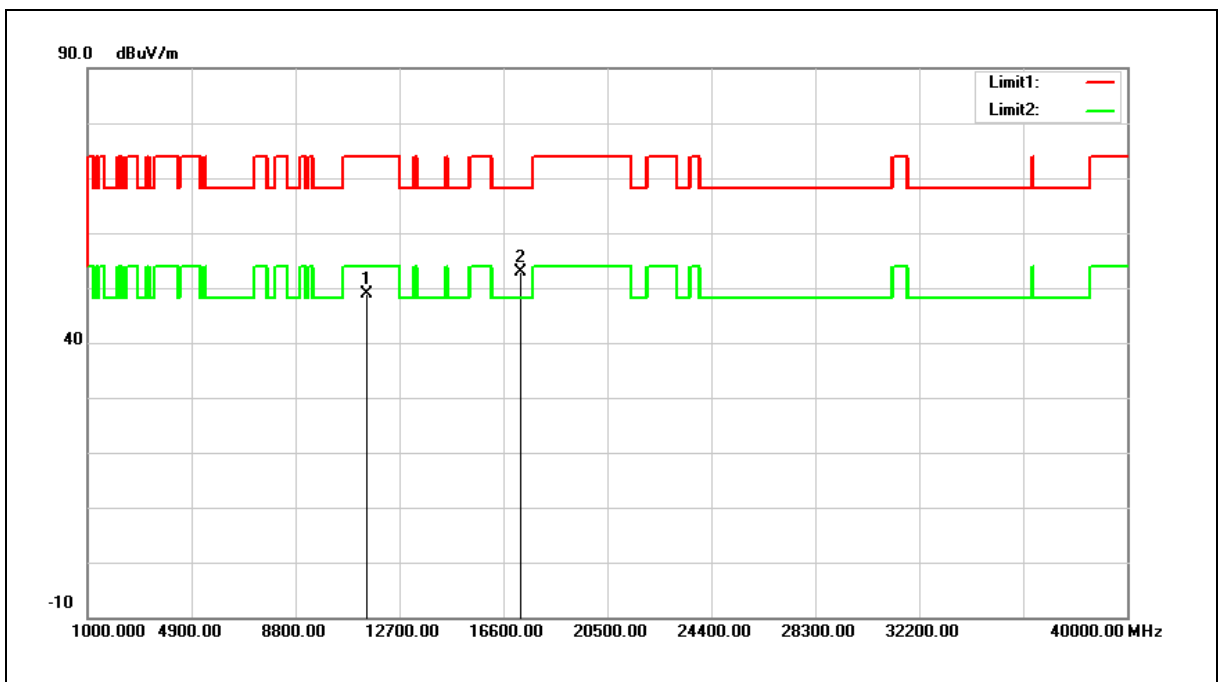


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11490.000	30.41	18.46	48.87	74.00	-25.13	peak
2	17235.000	28.78	24.18	52.96	68.20	-15.24	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 110 V/60 Hz
Frequency:	5785 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 9		
Ant.Polar.:	Horizontal		

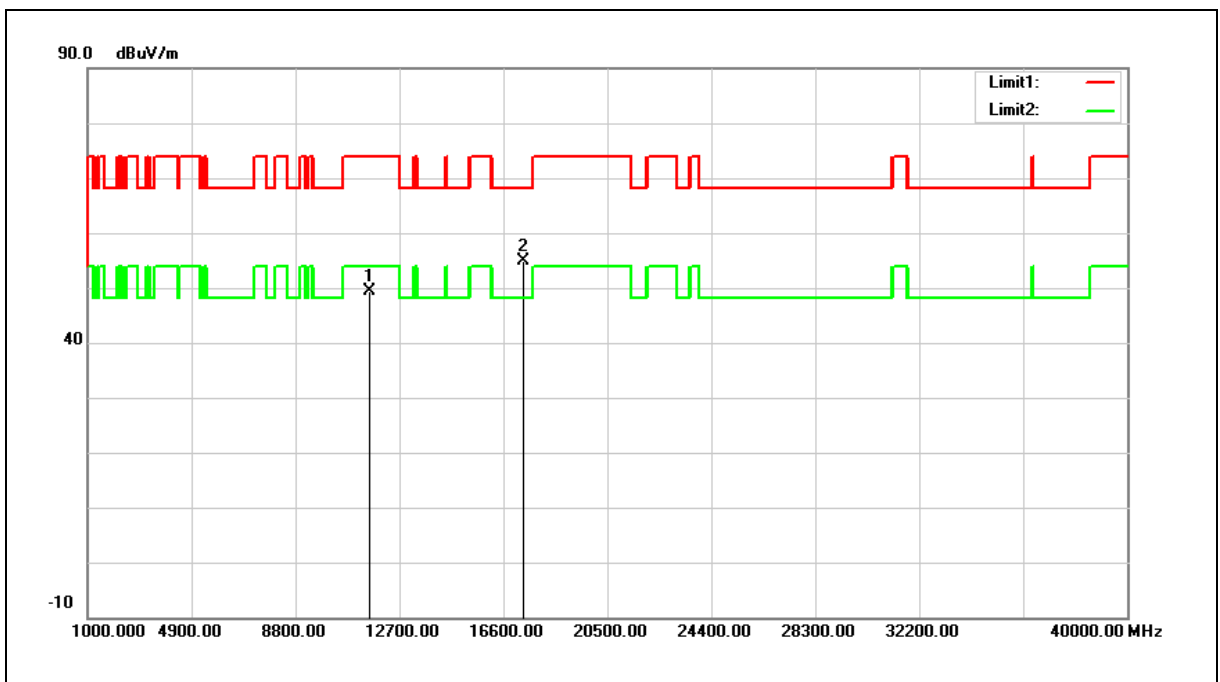


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11570.000	30.92	18.37	49.29	74.00	-24.71	peak
2	17355.000	30.28	24.68	54.96	68.20	-13.24	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 110 V/60 Hz
Frequency:	5785 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 9		
Ant.Polar.:	Vertical		

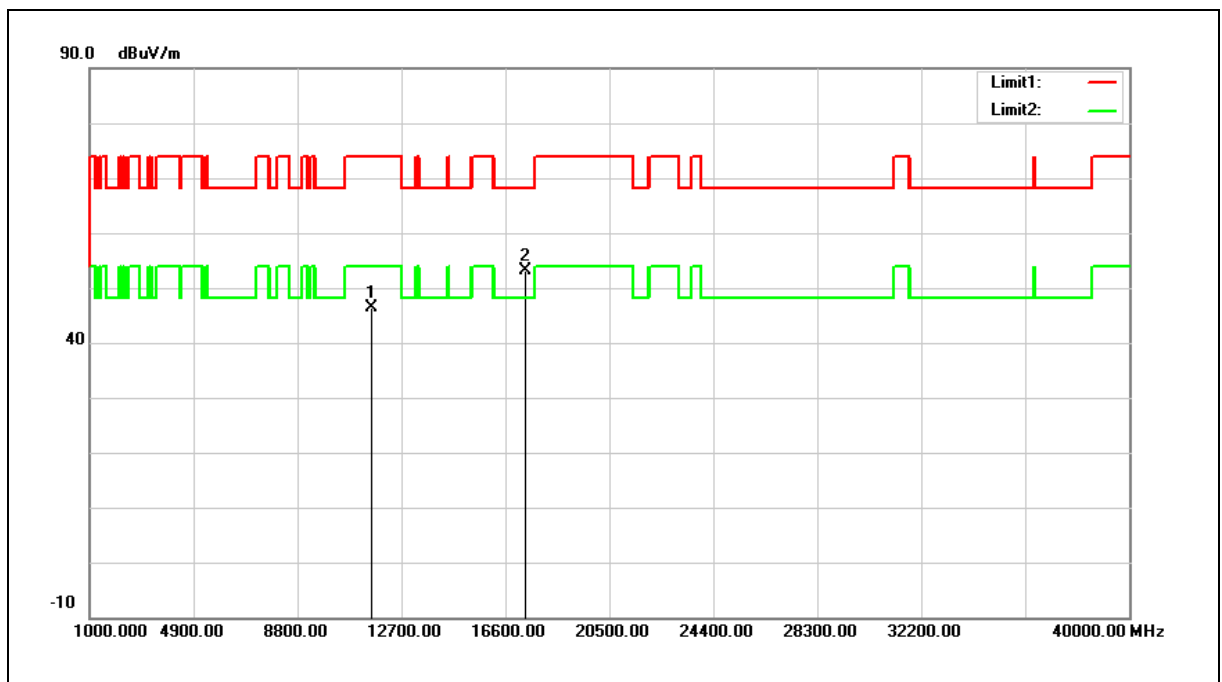


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11570.000	28.09	18.37	46.46	74.00	-27.54	peak
2	17355.000	28.39	24.68	53.07	68.20	-15.13	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 110 V/60 Hz
Frequency:	5825 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 9		
Ant.Polar.:	Horizontal		

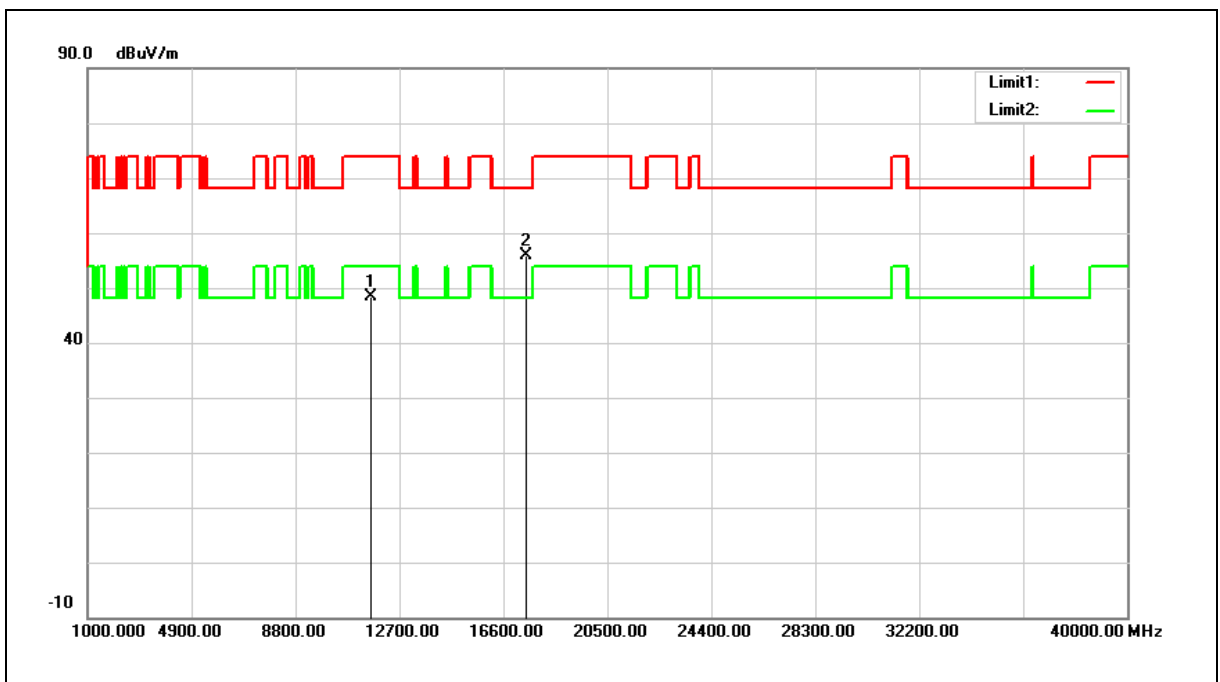


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11650.000	29.98	18.28	48.26	74.00	-25.74	peak
2	17475.000	30.67	25.18	55.85	68.20	-12.35	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 110 V/60 Hz
Frequency:	5825 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 9		
Ant.Polar.:	Vertical		

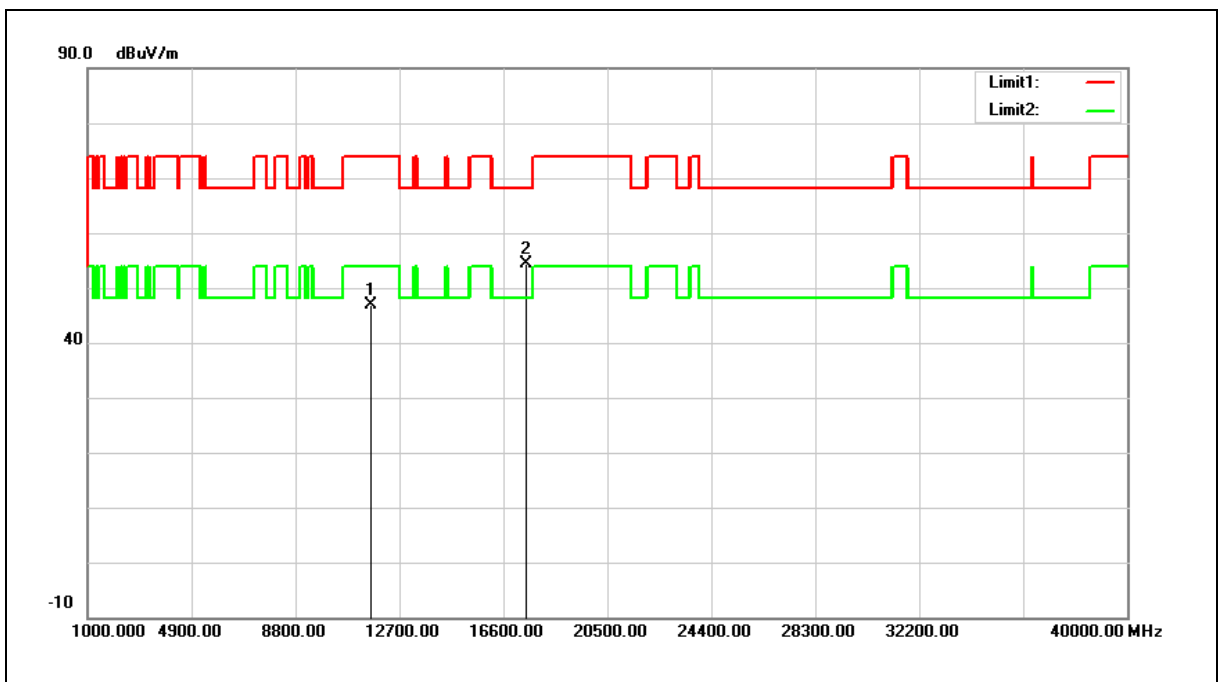


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11650.000	28.49	18.28	46.77	74.00	-27.23	peak
2	17475.000	29.18	25.18	54.36	68.20	-13.84	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 110 V/60 Hz
Frequency:	5190 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 10		
Ant.Polar.:	Horizontal		

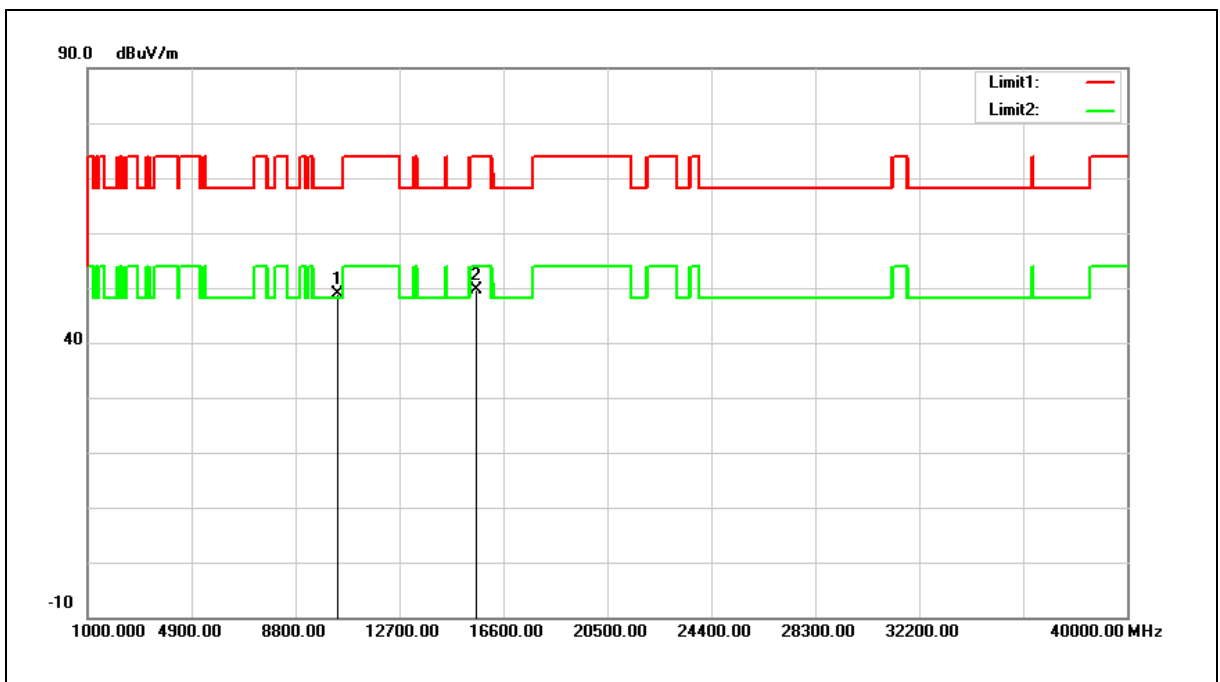


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10380.000	31.91	16.86	48.77	68.20	-19.43	peak
2	15570.000	30.61	18.95	49.56	74.00	-24.44	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 110 V/60 Hz
Frequency:	5190 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 10		
Ant.Polar.:	Vertical		

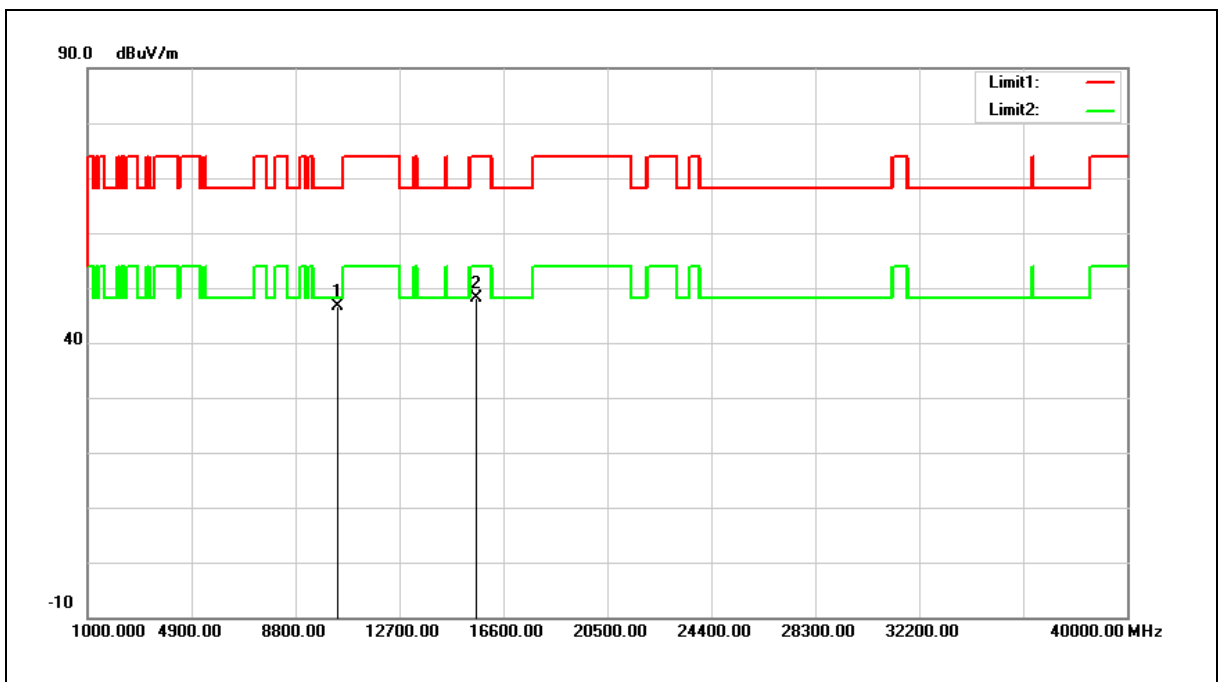


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10380.000	29.88	16.86	46.74	68.20	-21.46	peak
2	15570.000	29.07	18.95	48.02	74.00	-25.98	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 110 V/60 Hz
Frequency:	5230 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 10		
Ant.Polar.:	Horizontal		

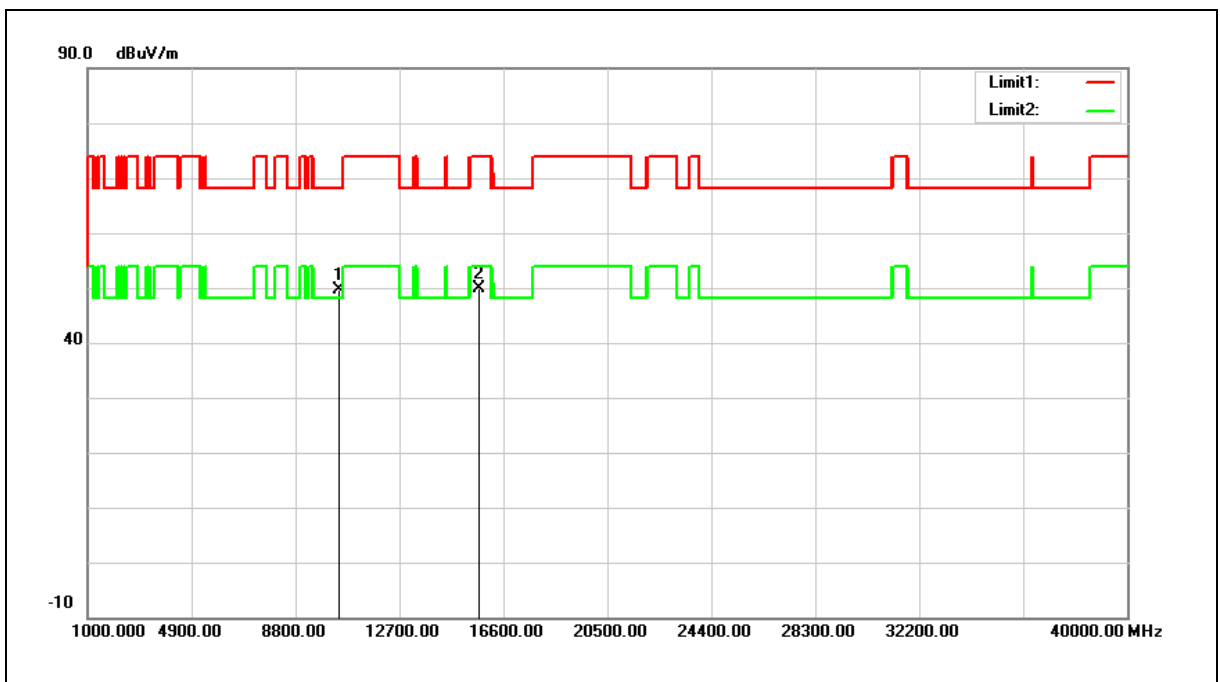


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10460.000	32.38	17.15	49.53	68.20	-18.67	peak
2	15690.000	31.13	18.64	49.77	74.00	-24.23	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 110 V/60 Hz
Frequency:	5230 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 10		
Ant.Polar.:	Vertical		

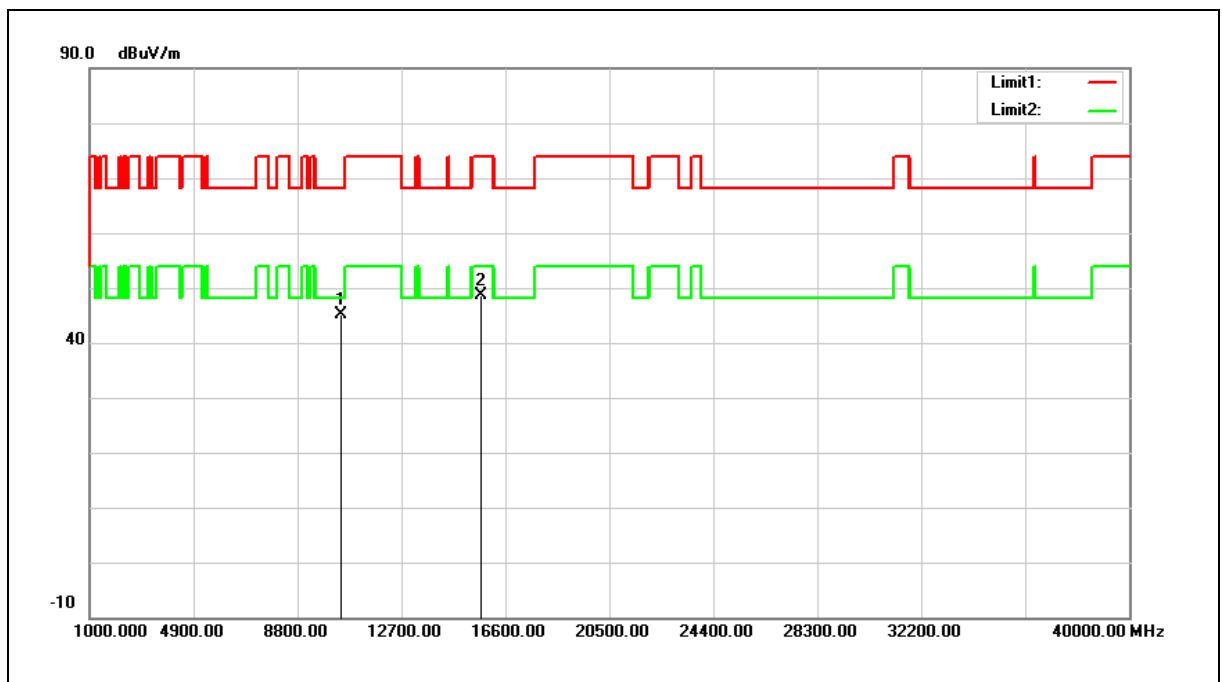


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10460.000	28.09	17.15	45.24	68.20	-22.96	peak
2	15690.000	30.03	18.64	48.67	74.00	-25.33	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 110 V/60 Hz
Frequency:	5270 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 10		
Ant.Polar.:	Horizontal		

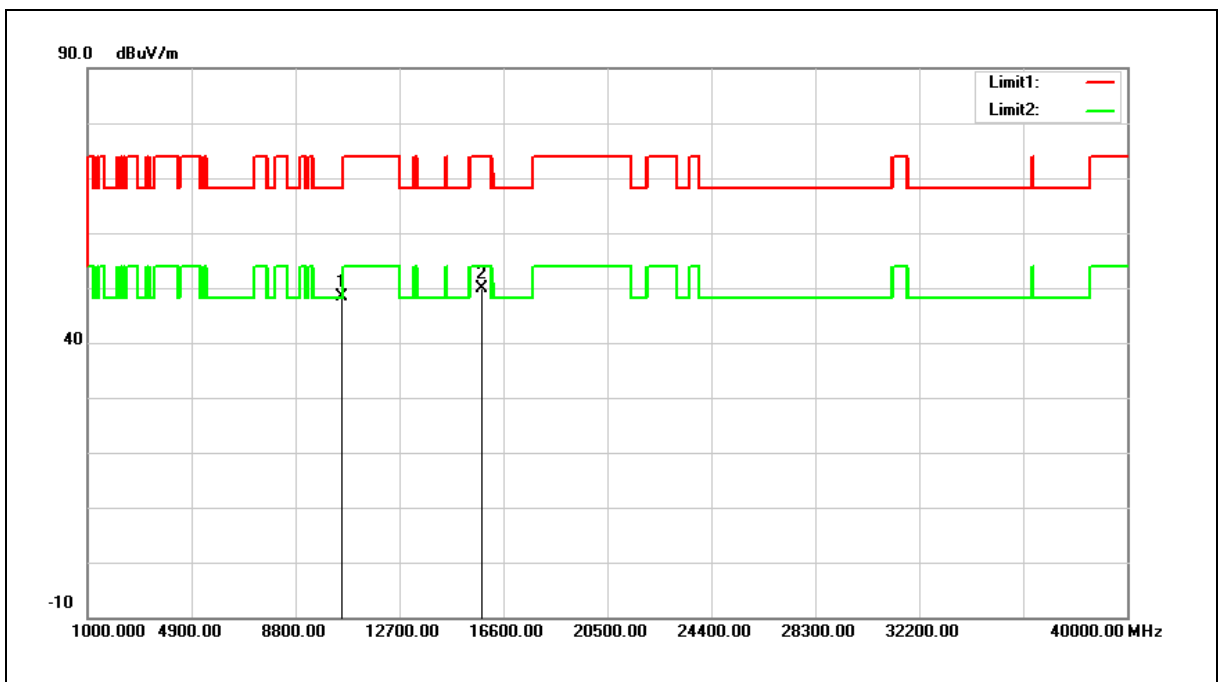


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10540.000	31.09	17.41	48.50	68.20	-19.70	peak
2	15810.000	31.50	18.34	49.84	74.00	-24.16	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 110 V/60 Hz
Frequency:	5270 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 10		
Ant.Polar.:	Vertical		

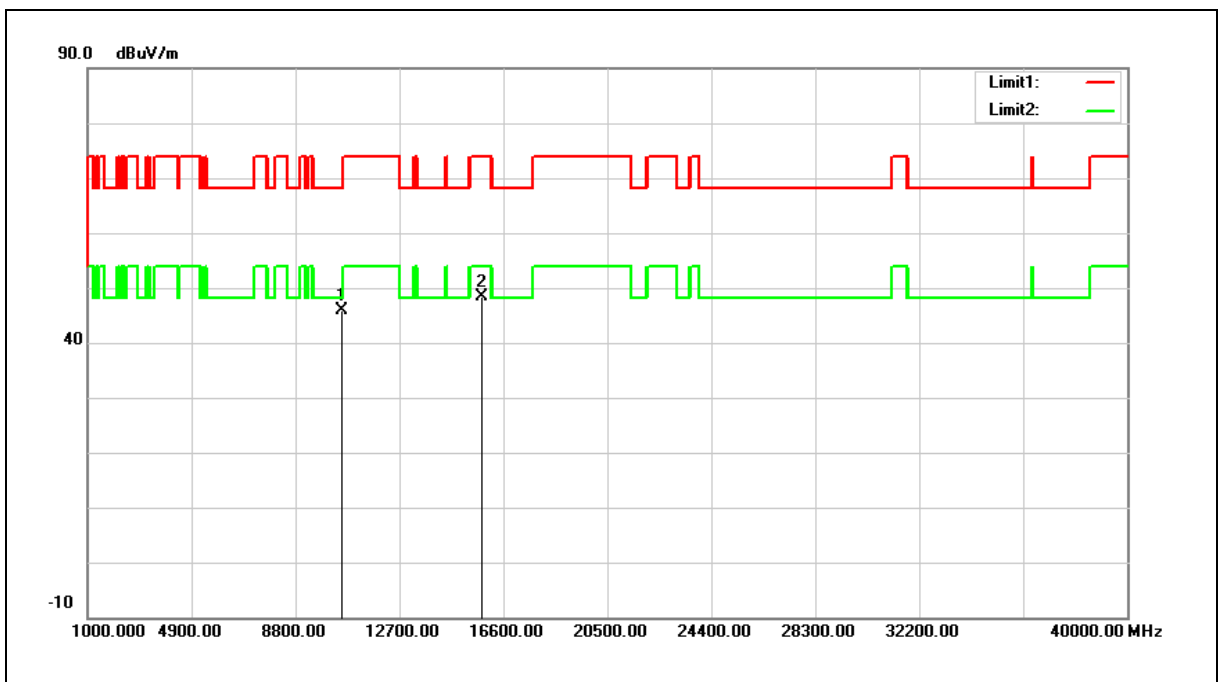


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10540.000	28.38	17.41	45.79	68.20	-22.41	peak
2	15810.000	29.97	18.34	48.31	74.00	-25.69	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 110 V/60 Hz
Frequency:	5310 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 10		
Ant.Polar.:	Horizontal		

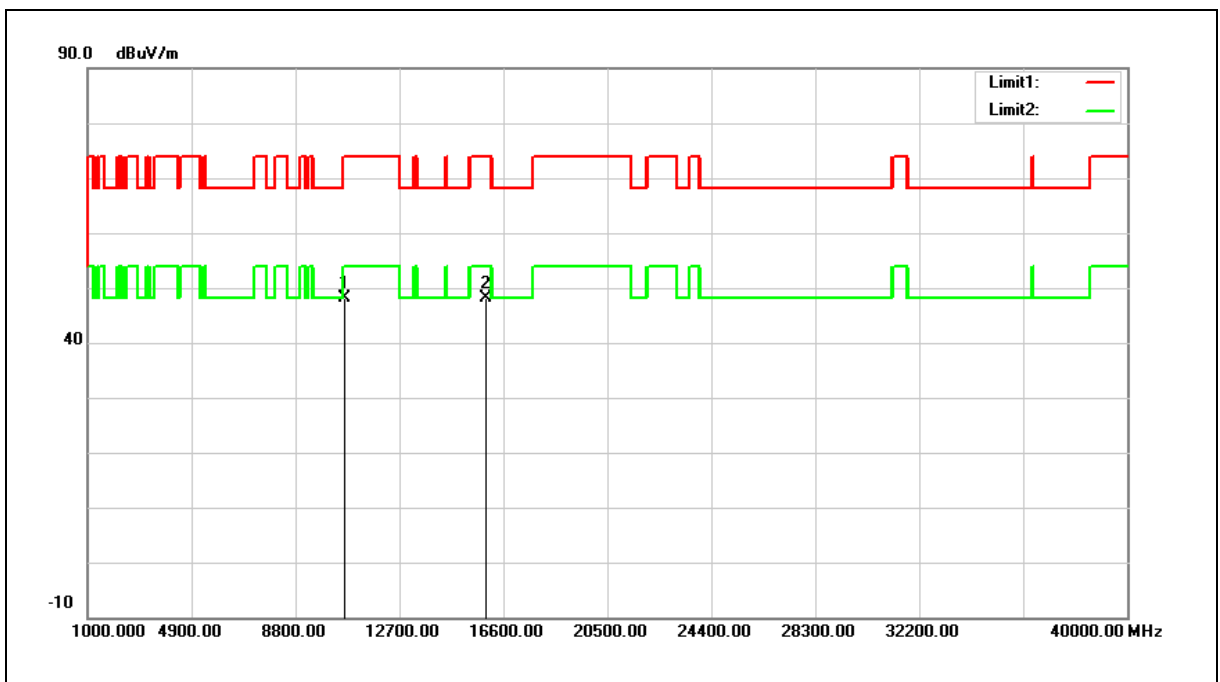


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10620.000	30.63	17.59	48.22	74.00	-25.78	peak
2	15930.000	30.00	18.03	48.03	74.00	-25.97	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 110 V/60 Hz
Frequency:	5310 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 10		
Ant.Polar.:	Vertical		

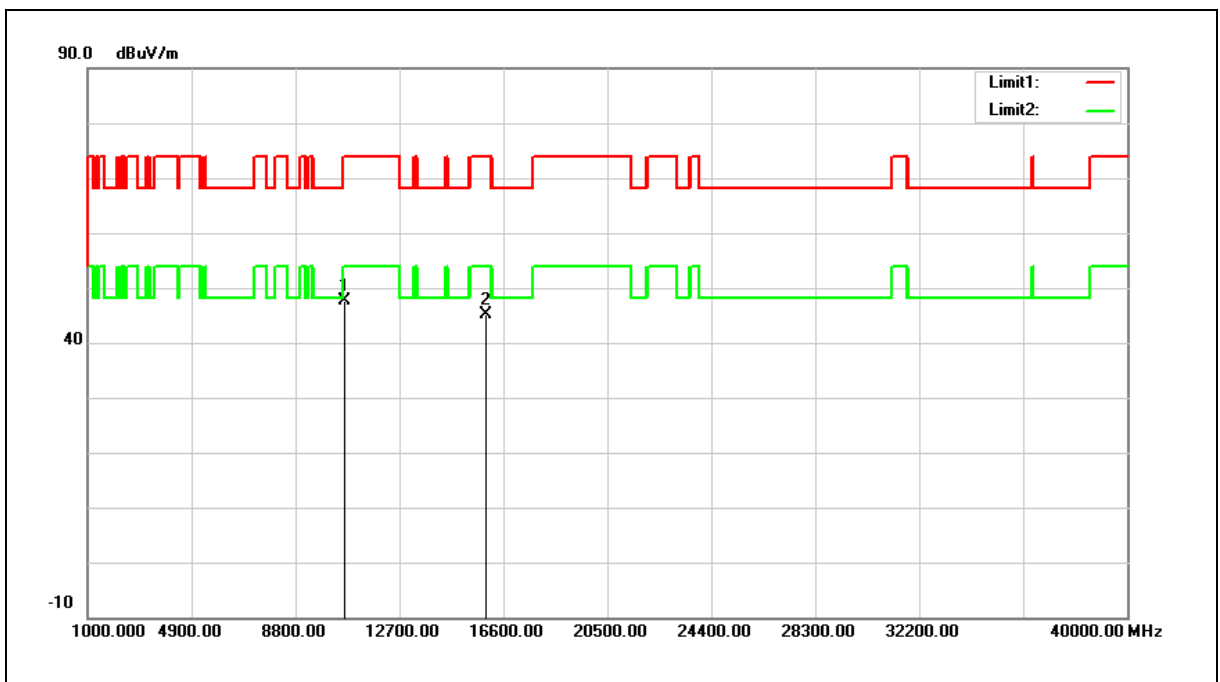


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10620.000	29.95	17.59	47.54	74.00	-26.46	peak
2	15930.000	27.10	18.03	45.13	74.00	-28.87	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 110 V/60 Hz
Frequency:	5510 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 10		
Ant.Polar.:	Horizontal		

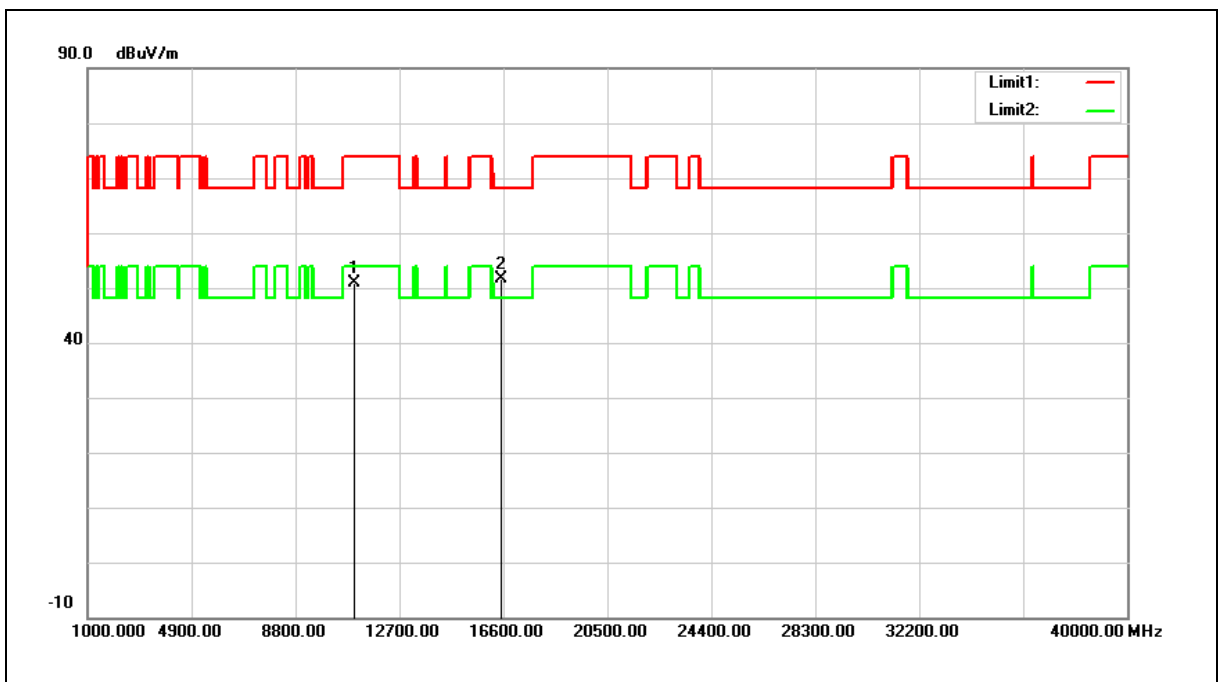


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11020.000	32.34	18.50	50.84	74.00	-23.16	peak
2	16530.000	30.80	20.92	51.72	68.20	-16.48	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 110 V/60 Hz
Frequency:	5510 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 10		
Ant.Polar.:	Vertical		

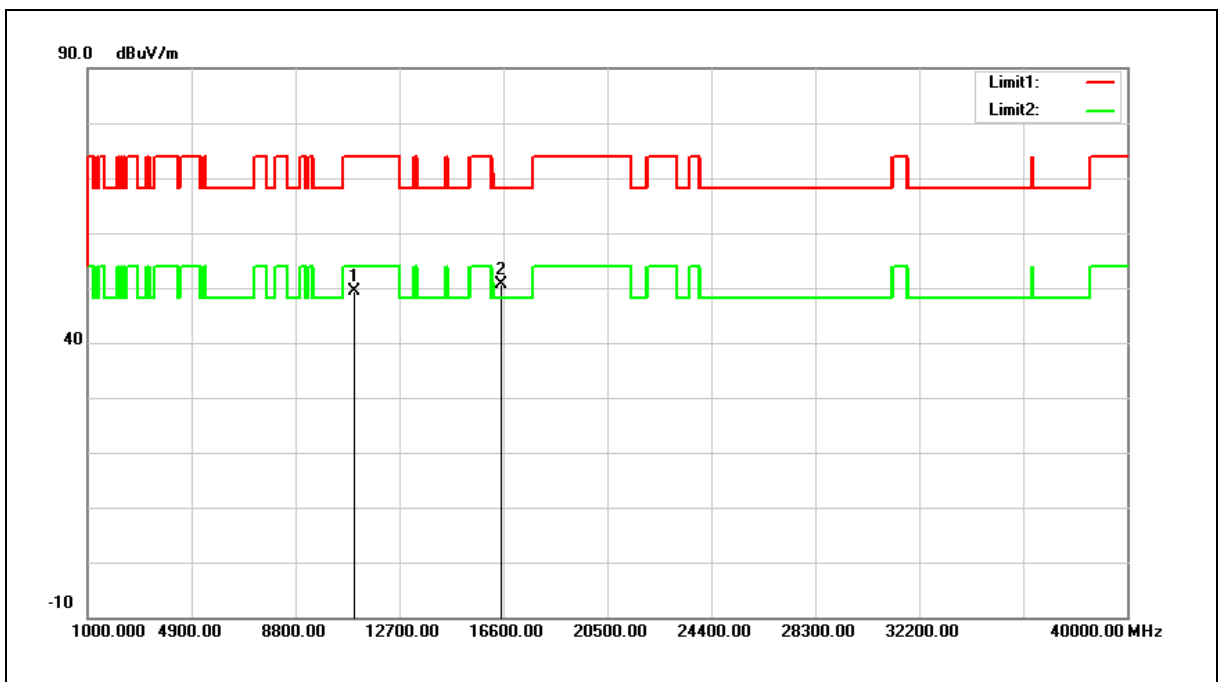


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11020.000	30.88	18.50	49.38	74.00	-24.62	peak
2	16530.000	29.60	20.92	50.52	68.20	-17.68	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 110 V/60 Hz
Frequency:	5550 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 10		
Ant.Polar.:	Horizontal		

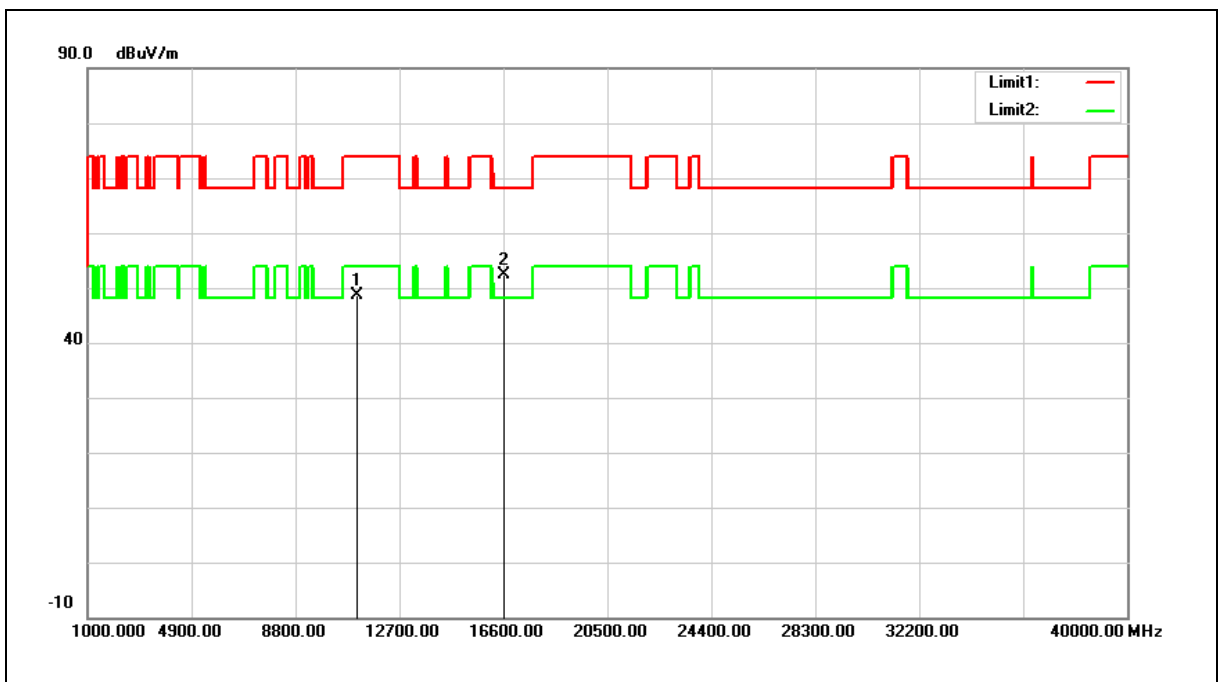


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11100.000	30.10	18.49	48.59	74.00	-25.41	peak
2	16650.000	30.80	21.51	52.31	68.20	-15.89	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 110 V/60 Hz
Frequency:	5550 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 10		
Ant.Polar.:	Vertical		

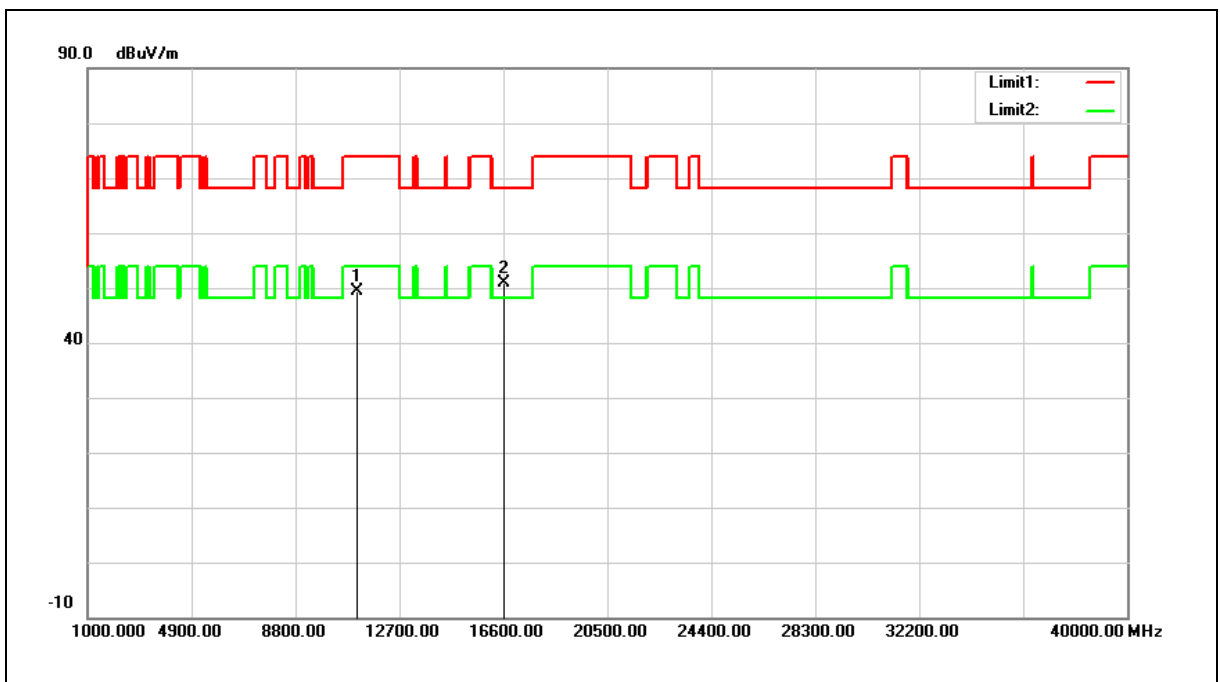


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11100.000	30.78	18.49	49.27	74.00	-24.73	peak
2	16650.000	29.39	21.51	50.90	68.20	-17.30	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 110 V/60 Hz
Frequency:	5670 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 10		
Ant.Polar.:	Horizontal		

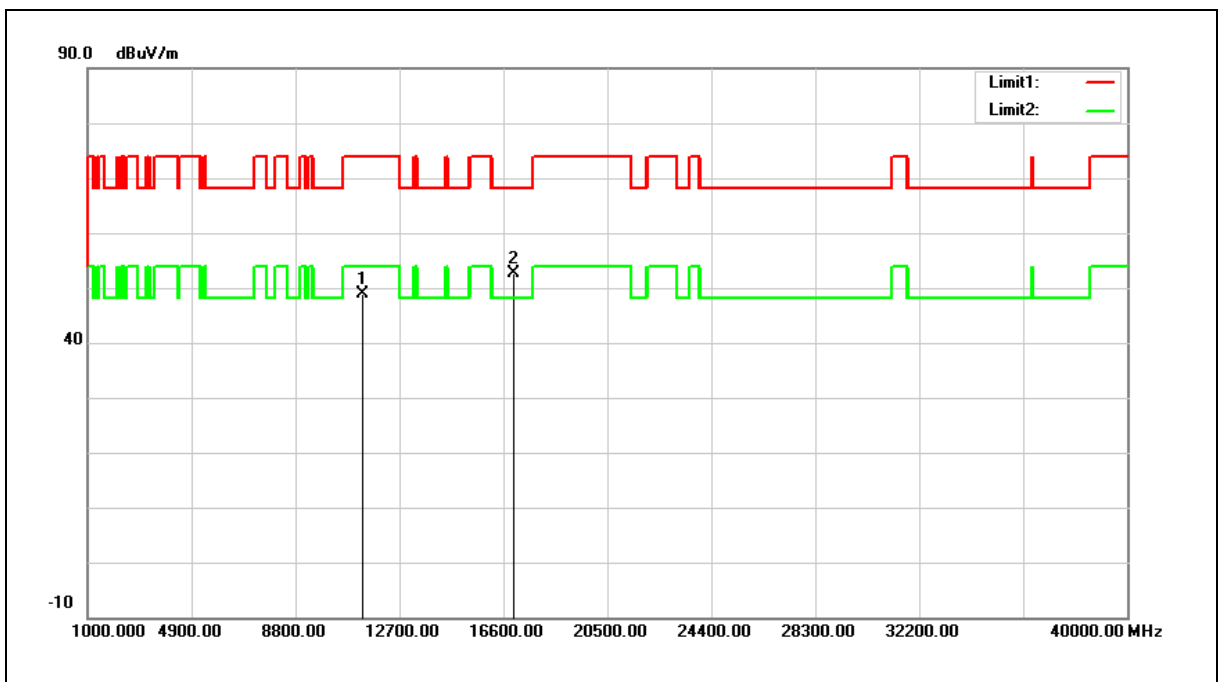


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11340.000	30.30	18.47	48.77	74.00	-25.23	peak
2	17010.000	29.47	23.26	52.73	68.20	-15.47	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 110 V/60 Hz
Frequency:	5670 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 10		
Ant.Polar.:	Vertical		

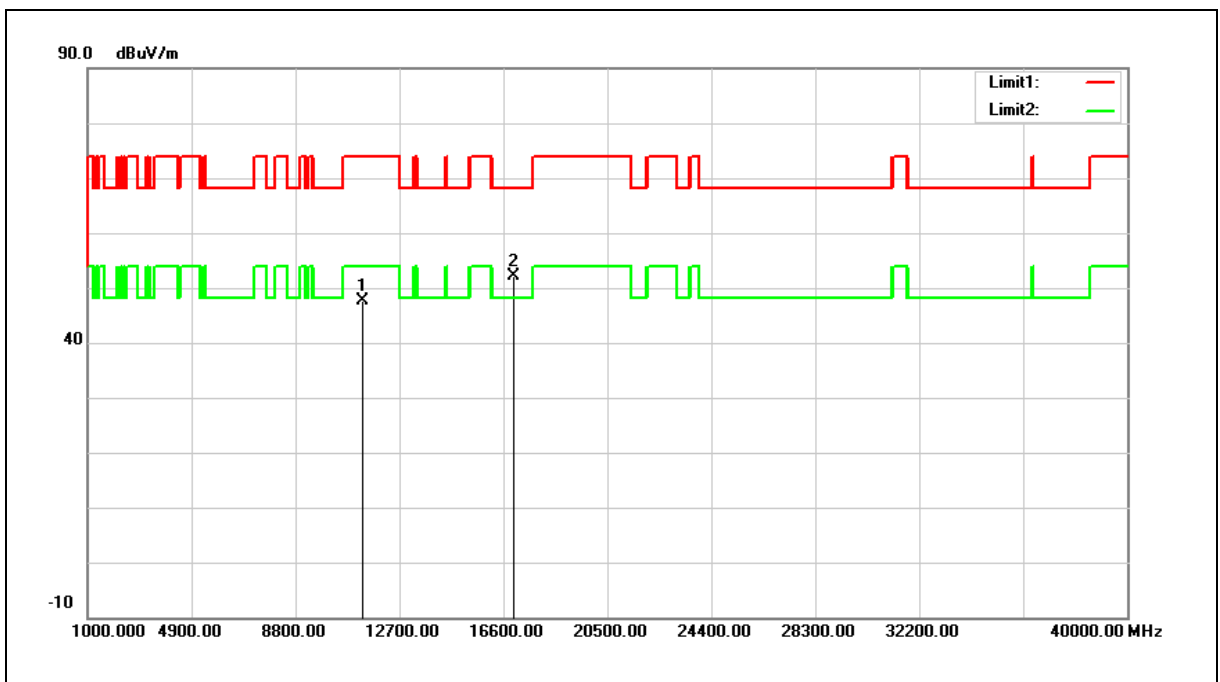


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11340.000	29.09	18.47	47.56	74.00	-26.44	peak
2	17010.000	28.79	23.26	52.05	68.20	-16.15	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 110 V/60 Hz
Frequency:	5755 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 10		
Ant.Polar.:	Horizontal		

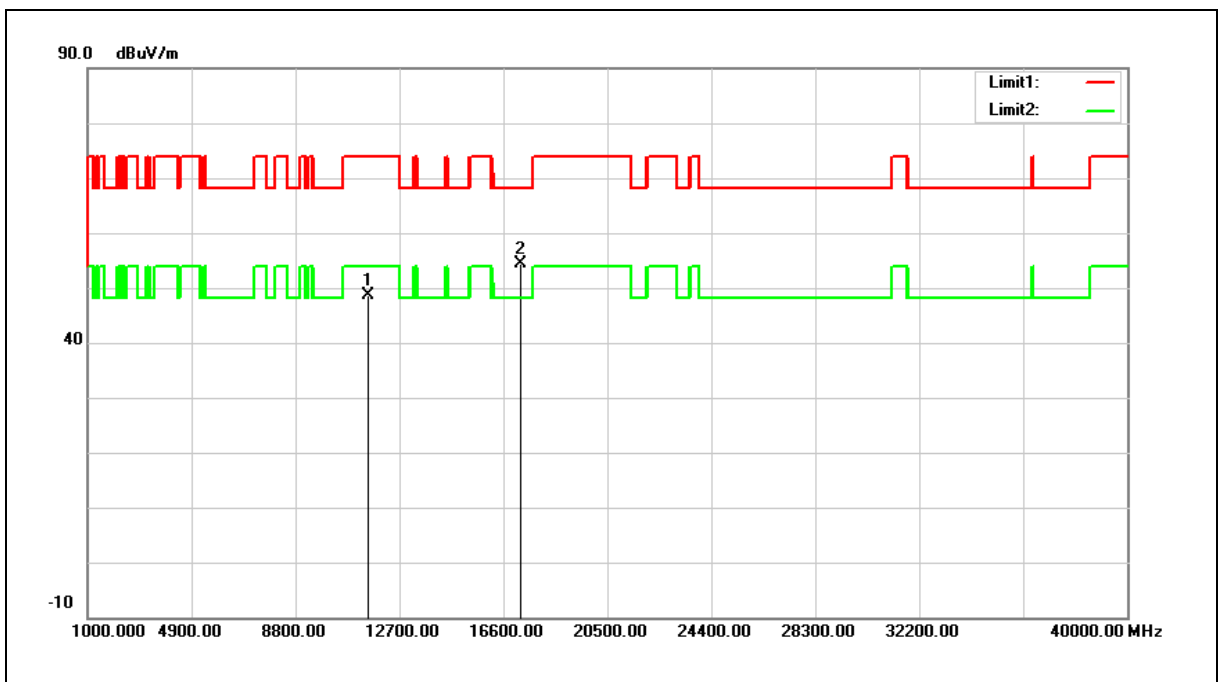


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11510.000	30.15	18.45	48.60	74.00	-25.40	peak
2	17265.000	30.19	24.31	54.50	68.20	-13.70	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 110 V/60 Hz
Frequency:	5755 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 10		
Ant.Polar.:	Vertical		

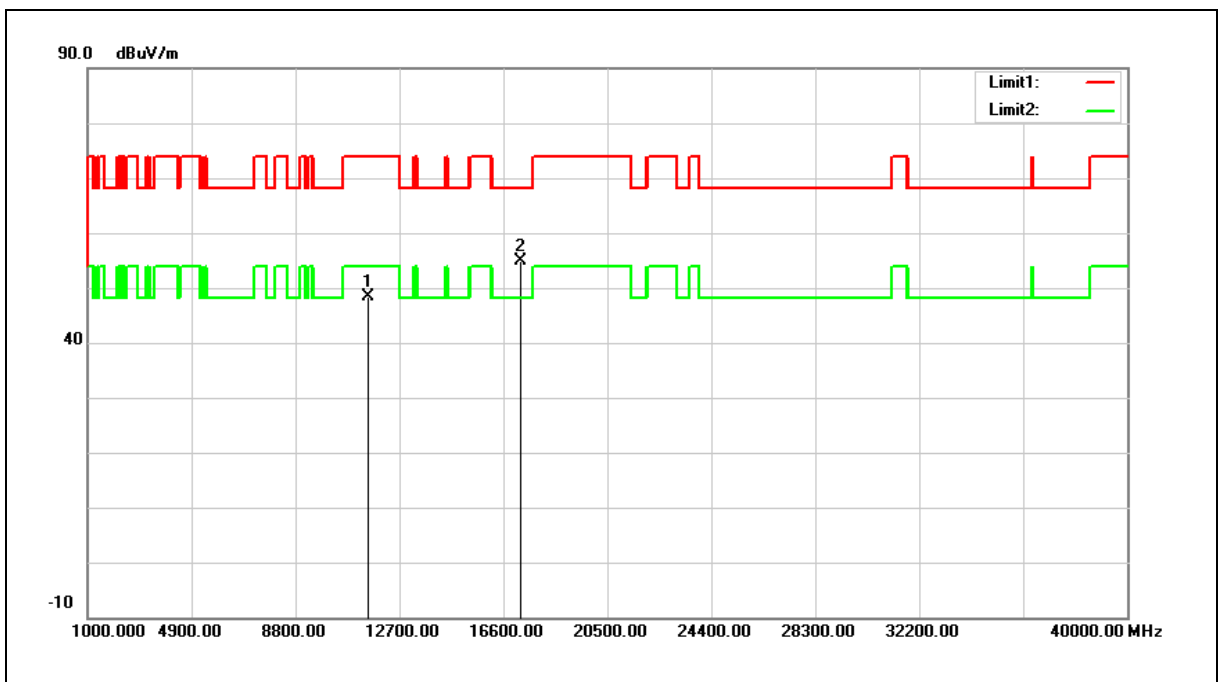


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11510.000	29.84	18.45	48.29	74.00	-25.71	peak
2	17265.000	30.66	24.31	54.97	68.20	-13.23	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 110 V/60 Hz
Frequency:	5795 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 10		
Ant.Polar.:	Horizontal		

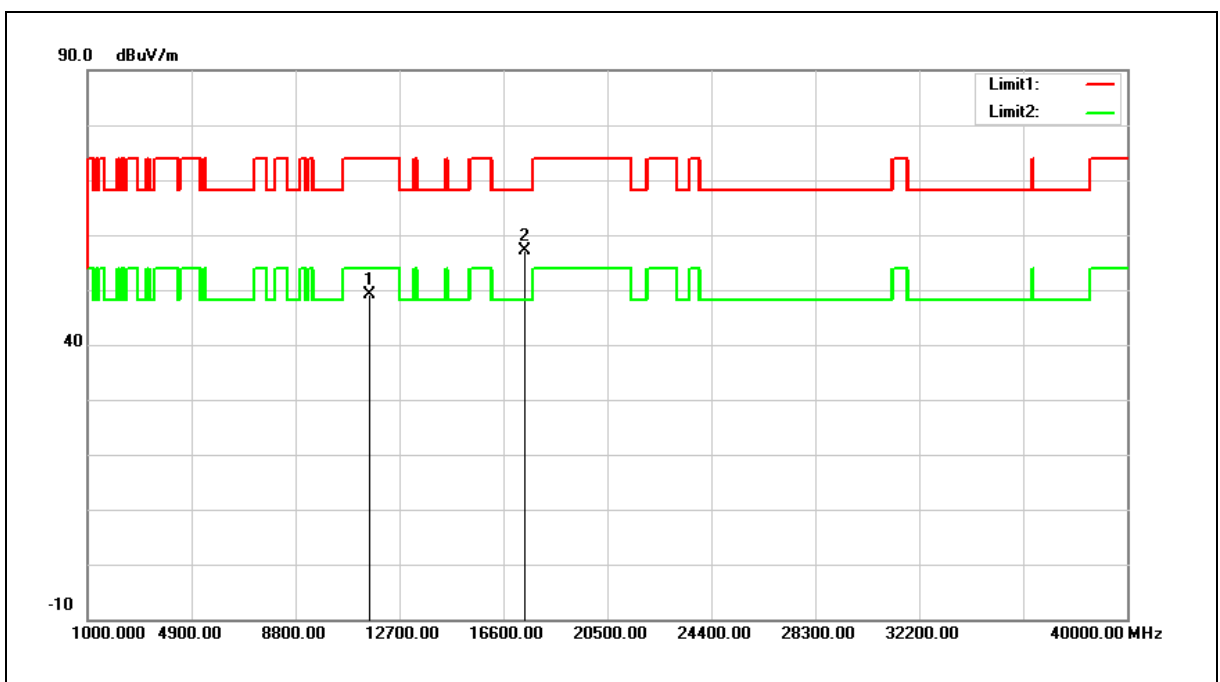


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11590.000	30.85	18.36	49.21	74.00	-24.79	peak
2	17385.000	32.45	24.80	57.25	68.20	-10.95	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 110 V/60 Hz
Frequency:	5795 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 10		
Ant.Polar.:	Vertical		

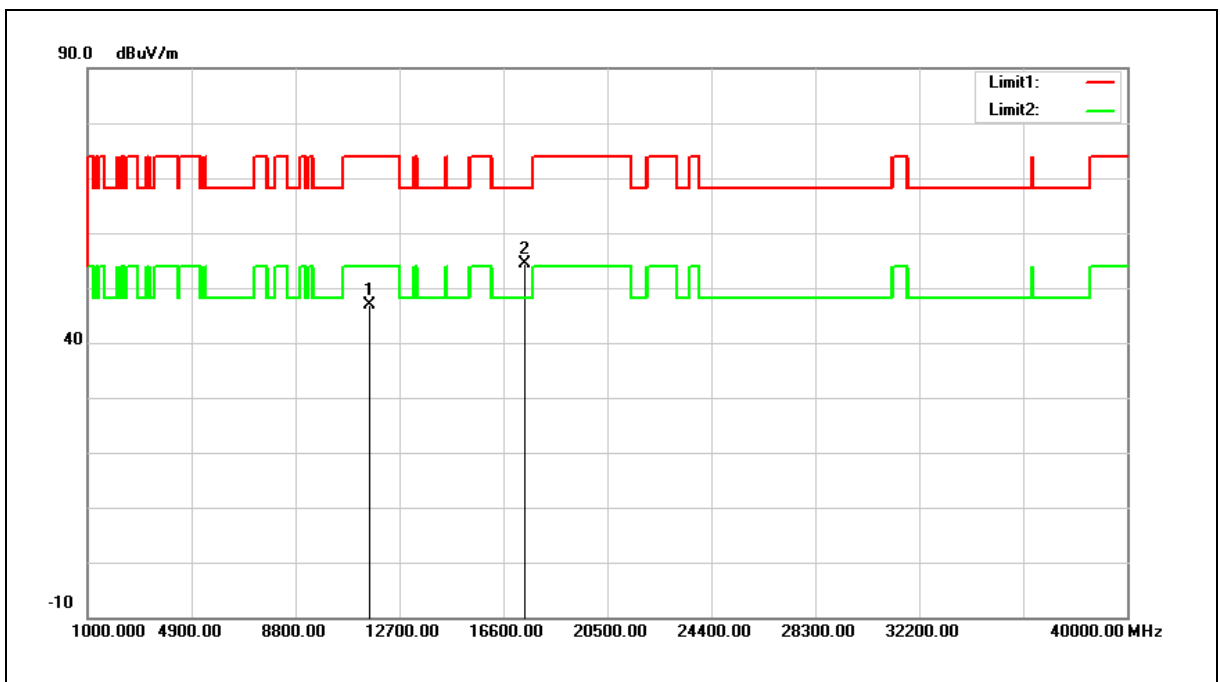


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11590.000	28.63	18.36	46.99	74.00	-27.01	peak
2	17385.000	29.68	24.80	54.48	68.20	-13.72	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 110 V/60 Hz
Frequency:	5210 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 11		
Ant.Polar.:	Horizontal		

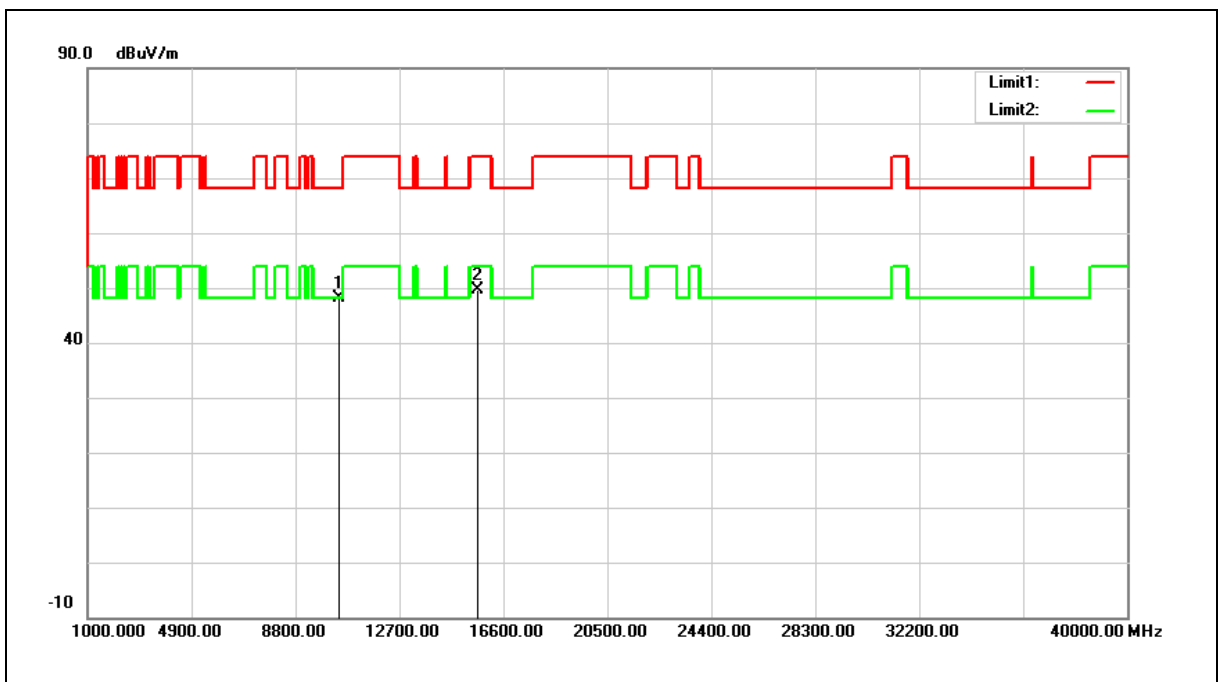


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10420.000	31.22	17.01	48.23	68.20	-19.97	peak
2	15630.000	30.82	18.79	49.61	74.00	-24.39	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 110 V/60 Hz
Frequency:	5210 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 11		
Ant.Polar.:	Vertical		

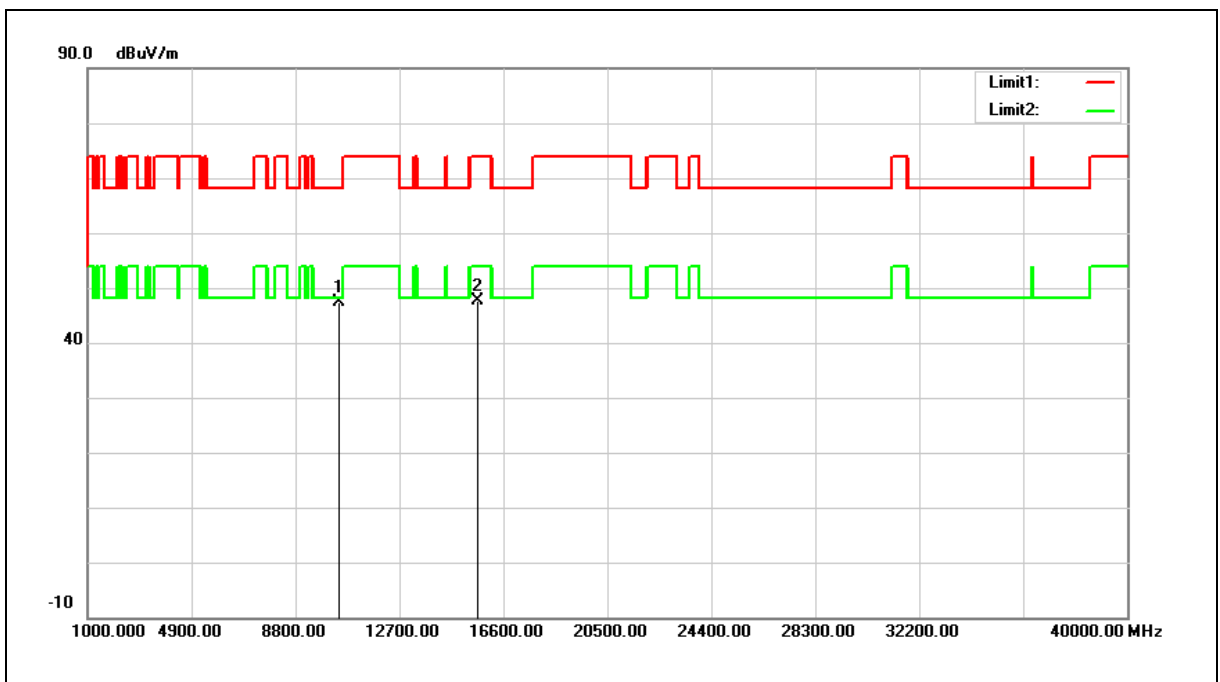


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10420.000	30.44	17.01	47.45	68.20	-20.75	peak
2	15630.000	28.90	18.79	47.69	74.00	-26.31	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 110 V/60 Hz
Frequency:	5290 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 11		
Ant.Polar.:	Horizontal		

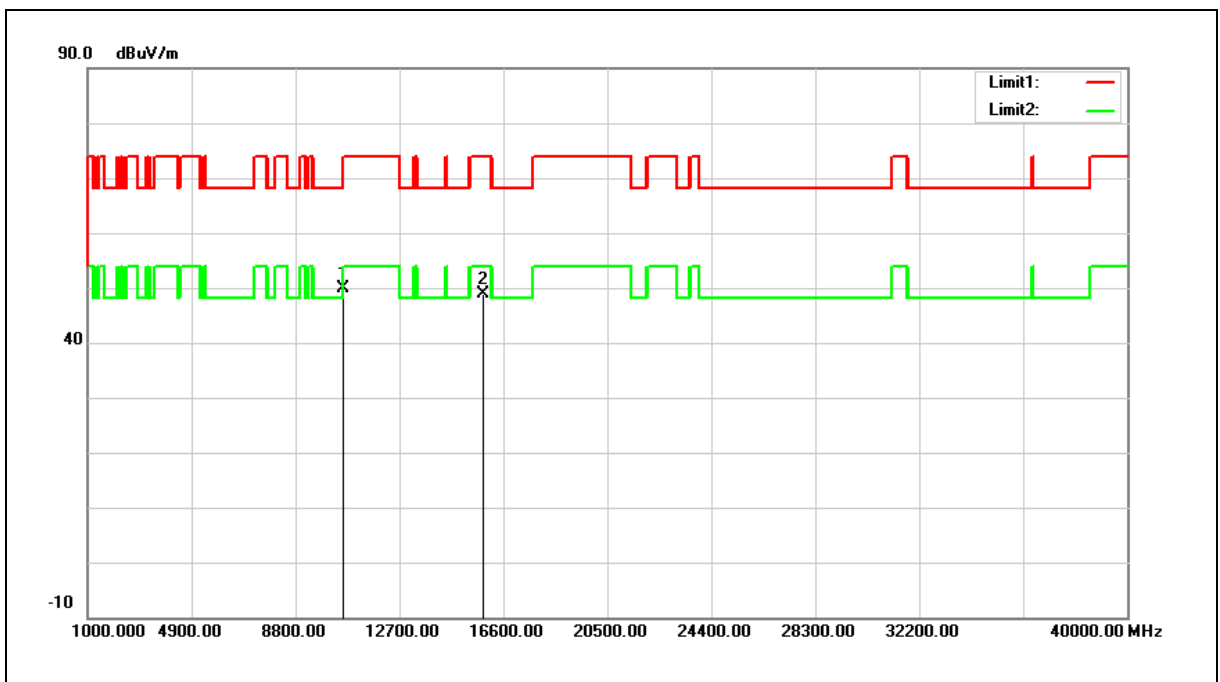


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10580.000	32.35	17.50	49.85	68.20	-18.35	peak
2	15870.000	30.67	18.19	48.86	74.00	-25.14	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 110 V/60 Hz
Frequency:	5290 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 11		
Ant.Polar.:	Vertical		

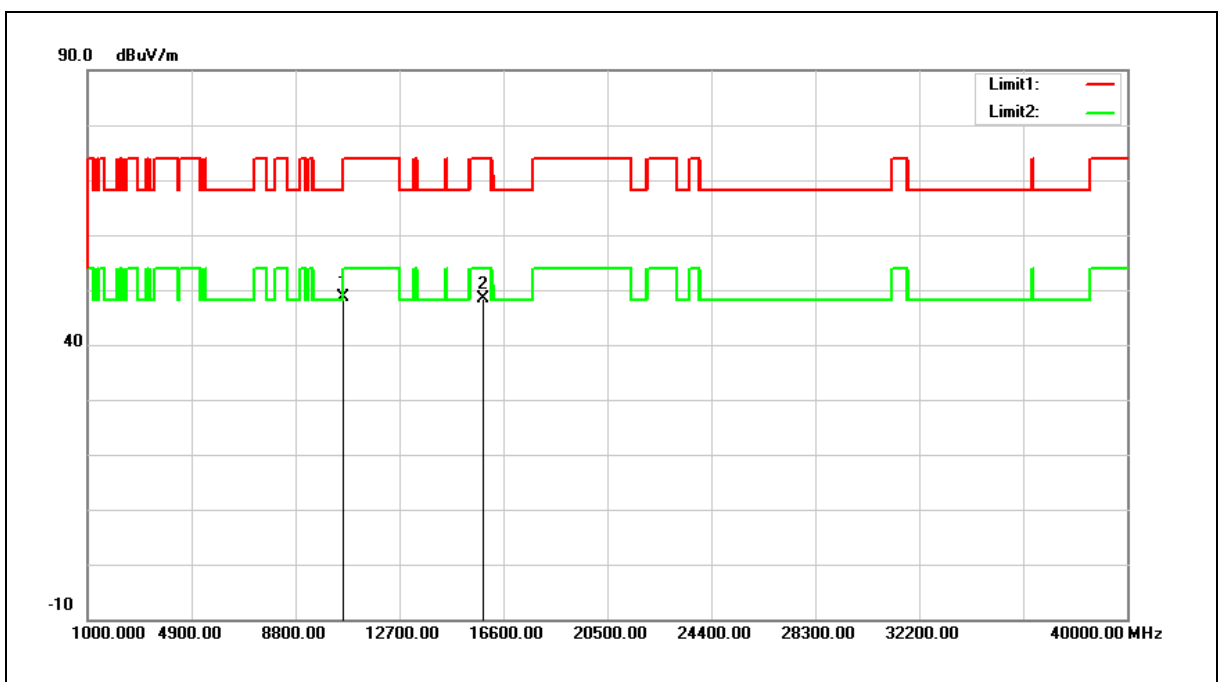


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10580.000	31.20	17.50	48.70	68.20	-19.50	peak
2	15870.000	30.31	18.19	48.50	74.00	-25.50	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 110 V/60 Hz
Frequency:	5530 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 11		
Ant.Polar.:	Horizontal		

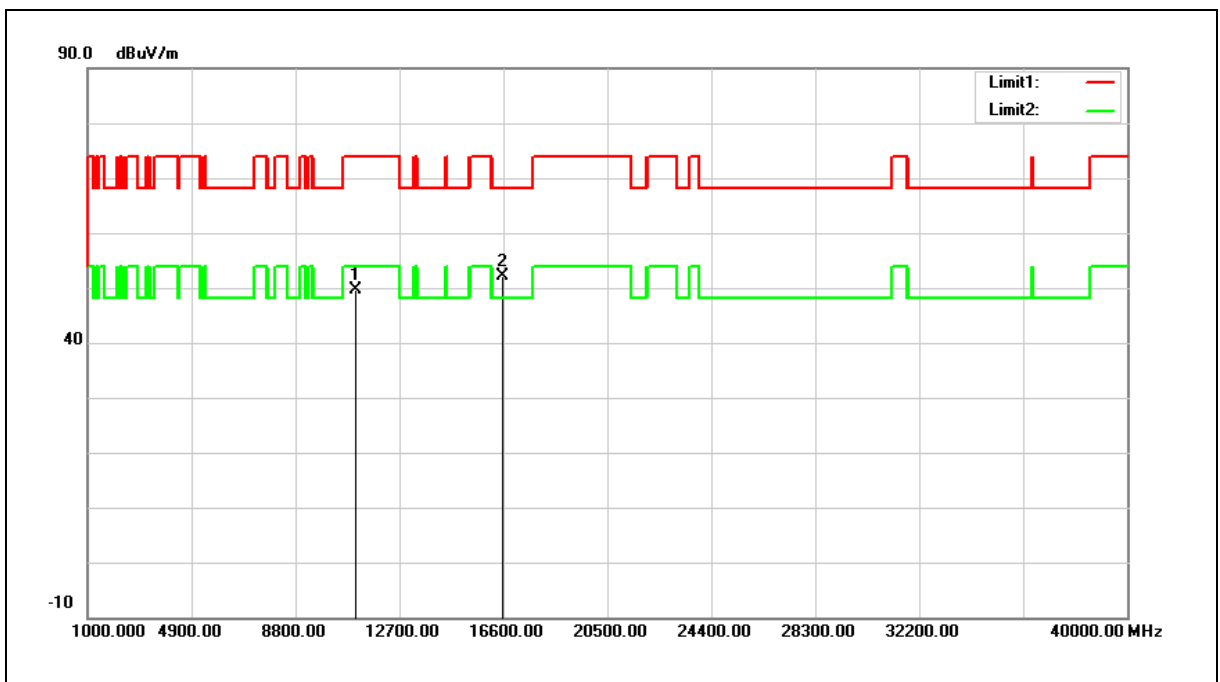


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11060.000	31.24	18.49	49.73	74.00	-24.27	peak
2	16590.000	30.90	21.21	52.11	68.20	-16.09	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 110 V/60 Hz
Frequency:	5530 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 11		
Ant.Polar.:	Vertical		

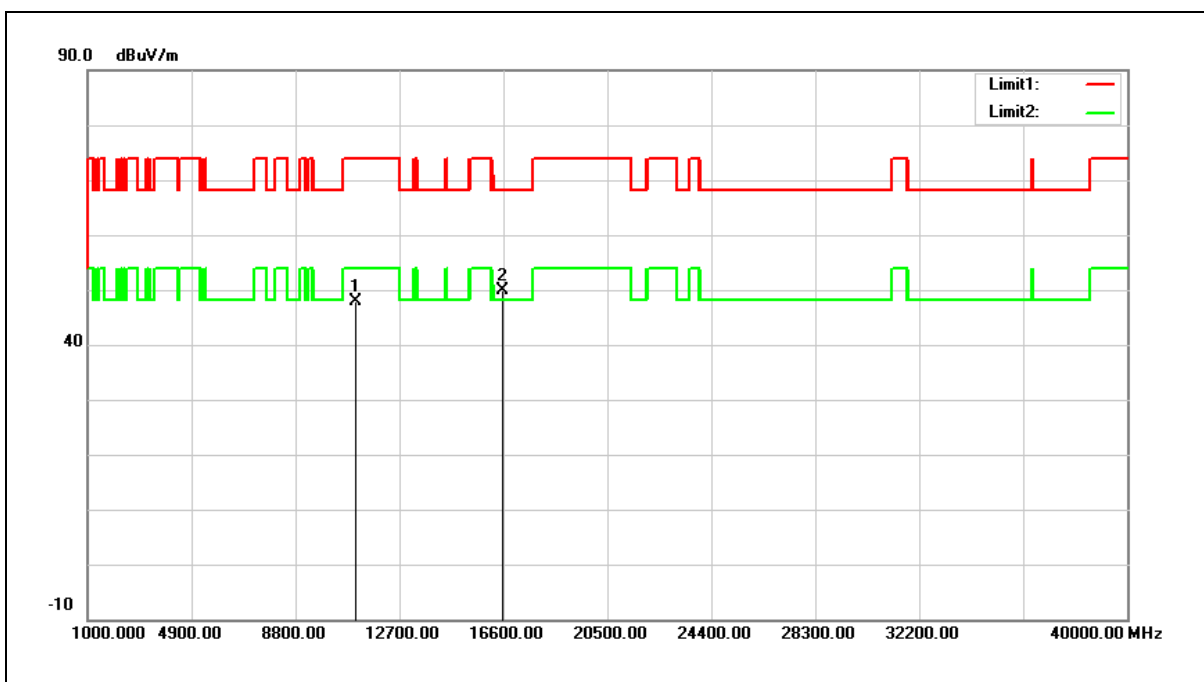


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11060.000	29.32	18.49	47.81	74.00	-26.19	peak
2	16590.000	28.62	21.21	49.83	68.20	-18.37	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 110 V/60 Hz
Frequency:	5775 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 11		
Ant.Polar.:	Horizontal		

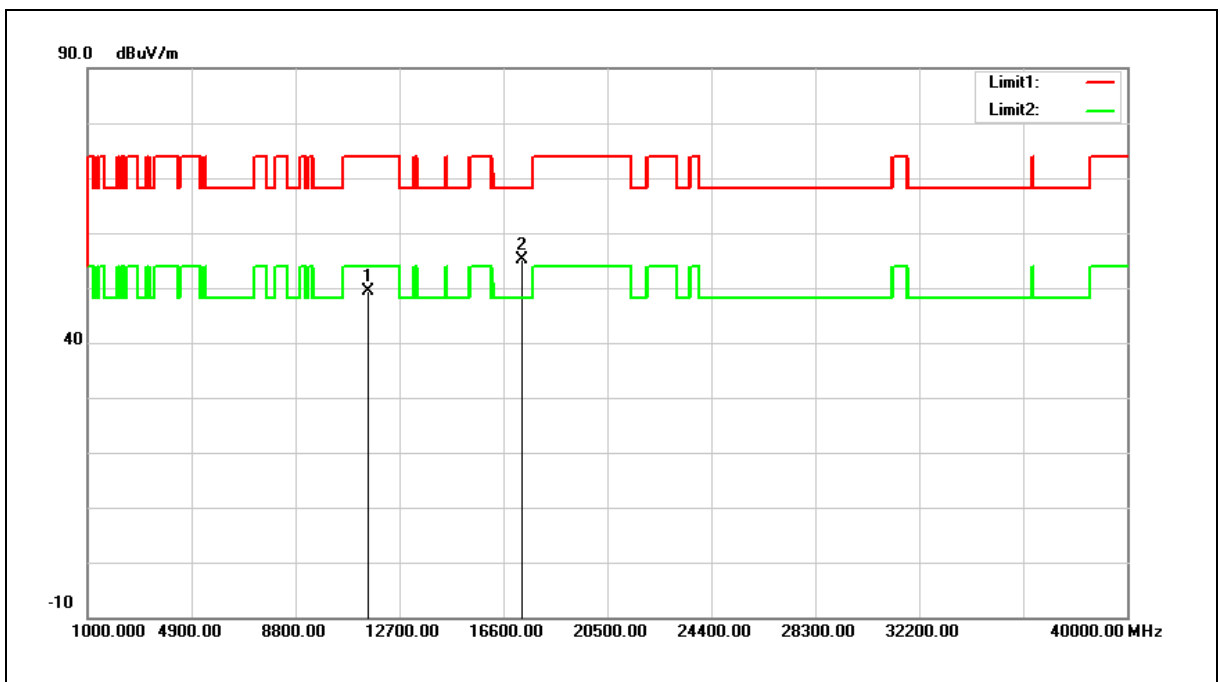


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11550.000	30.95	18.40	49.35	74.00	-24.65	peak
2	17325.000	30.68	24.57	55.25	68.20	-12.95	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 110 V/60 Hz
Frequency:	5775 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 11		
Ant.Polar.:	Vertical		

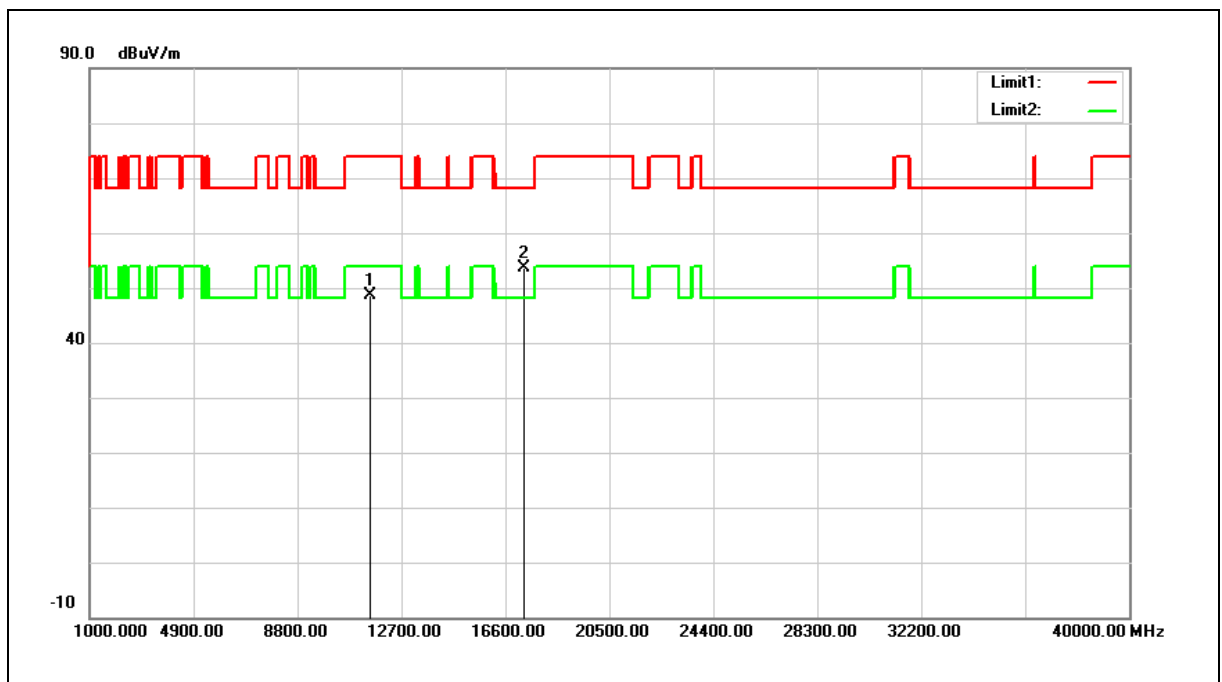


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11550.000	30.27	18.40	48.67	74.00	-25.33	peak
2	17325.000	29.03	24.57	53.60	68.20	-14.60	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 110 V/60 Hz
Frequency:	5250 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 12		
Ant.Polar.:	Horizontal		

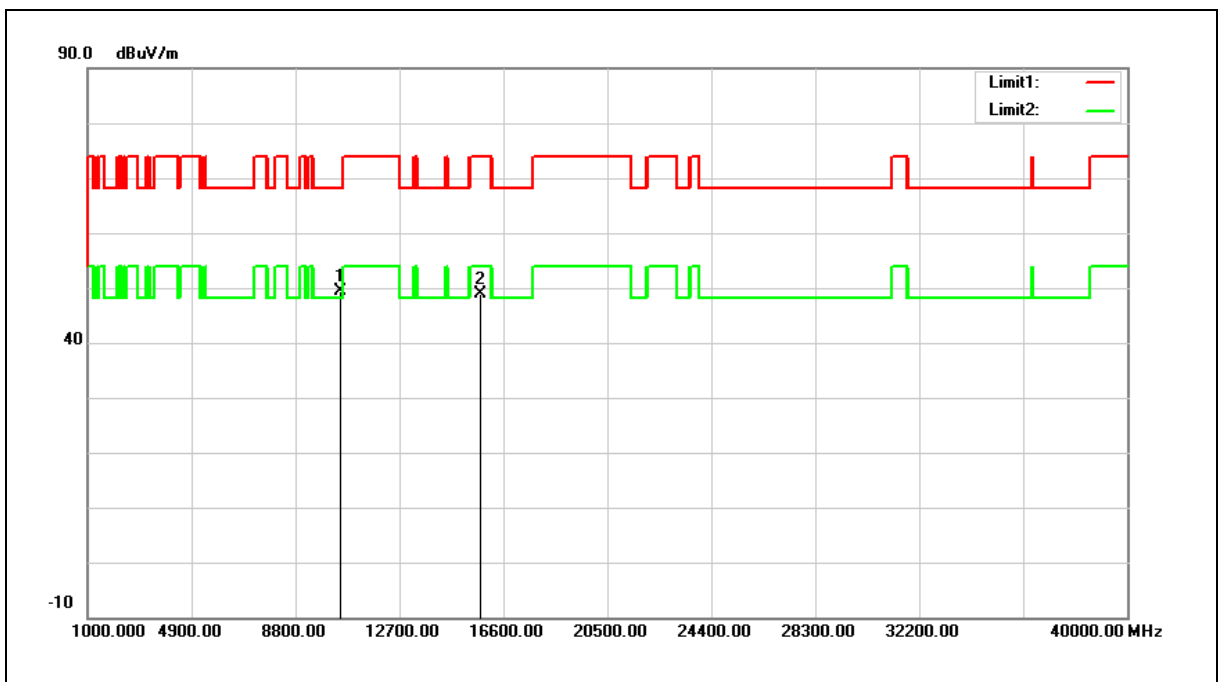


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10500.000	31.99	17.31	49.30	68.20	-18.90	peak
2	15750.000	30.34	18.49	48.83	74.00	-25.17	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 110 V/60 Hz
Frequency:	5250 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 12		
Ant.Polar.:	Vertical		

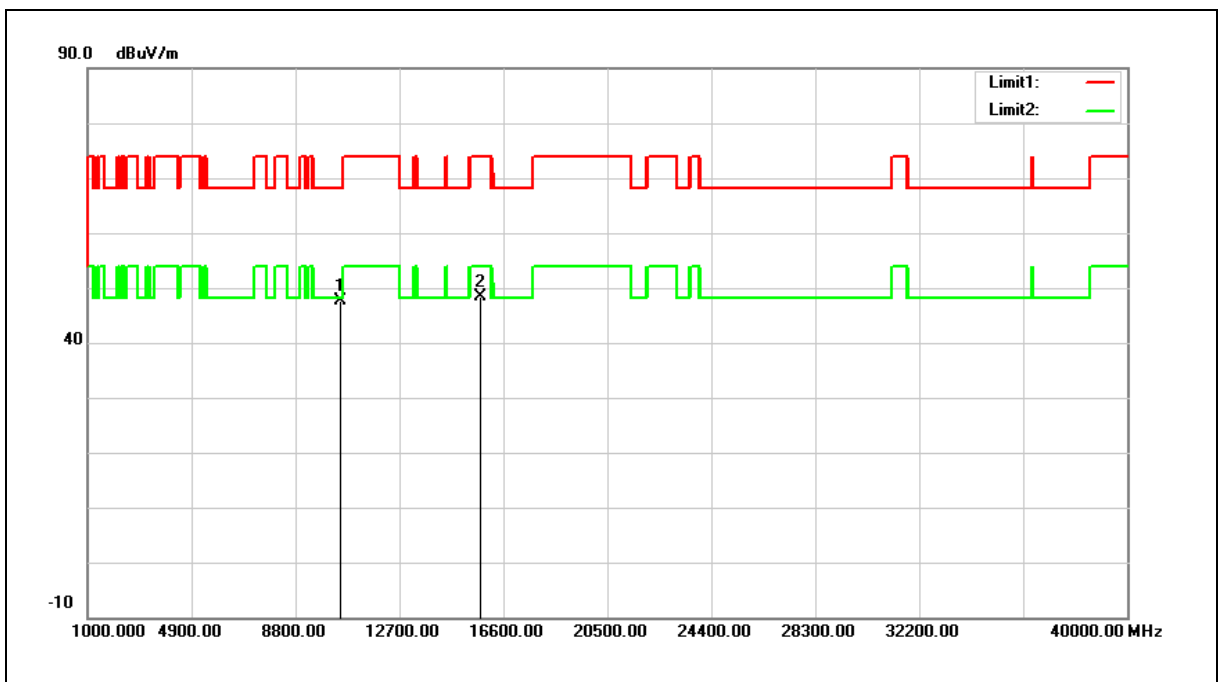


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10500.000	30.38	17.31	47.69	68.20	-20.51	peak
2	15750.000	29.93	18.49	48.42	74.00	-25.58	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 110 V/60 Hz
Frequency:	5570 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 12		
Ant.Polar.:	Horizontal		

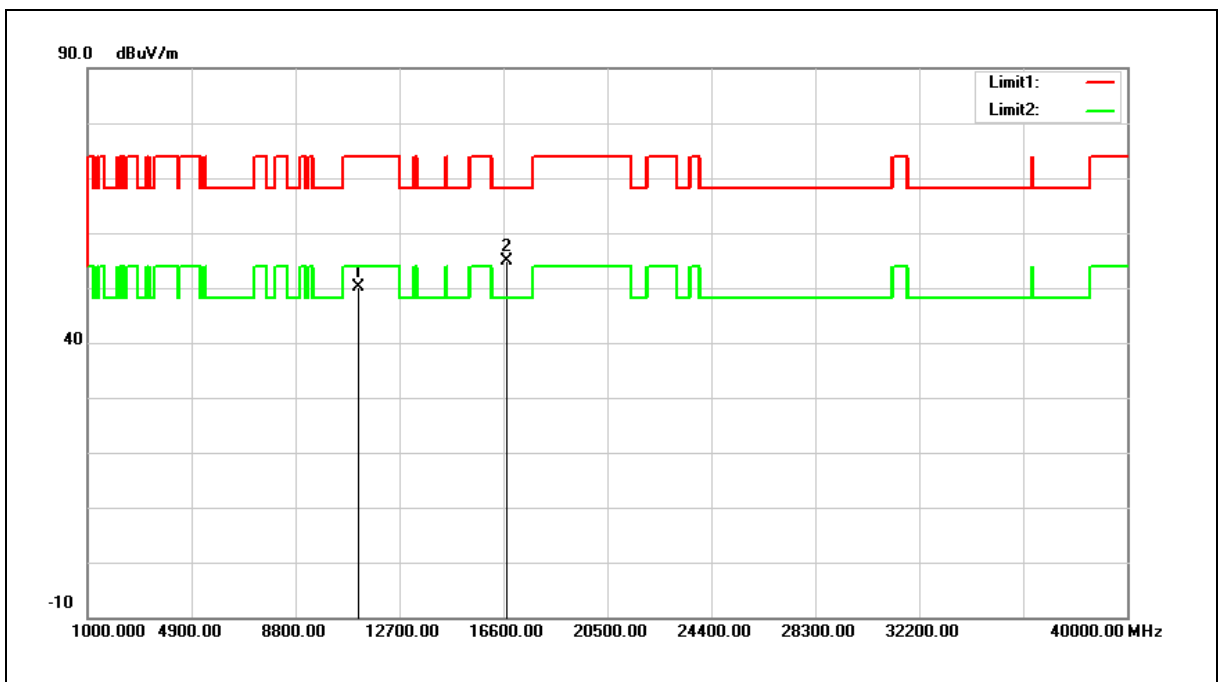


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11140.000	31.53	18.48	50.01	74.00	-23.99	peak
2	16710.000	33.20	21.80	55.00	68.20	-13.20	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 110 V/60 Hz
Frequency:	5570 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 12		
Ant.Polar.:	Vertical		

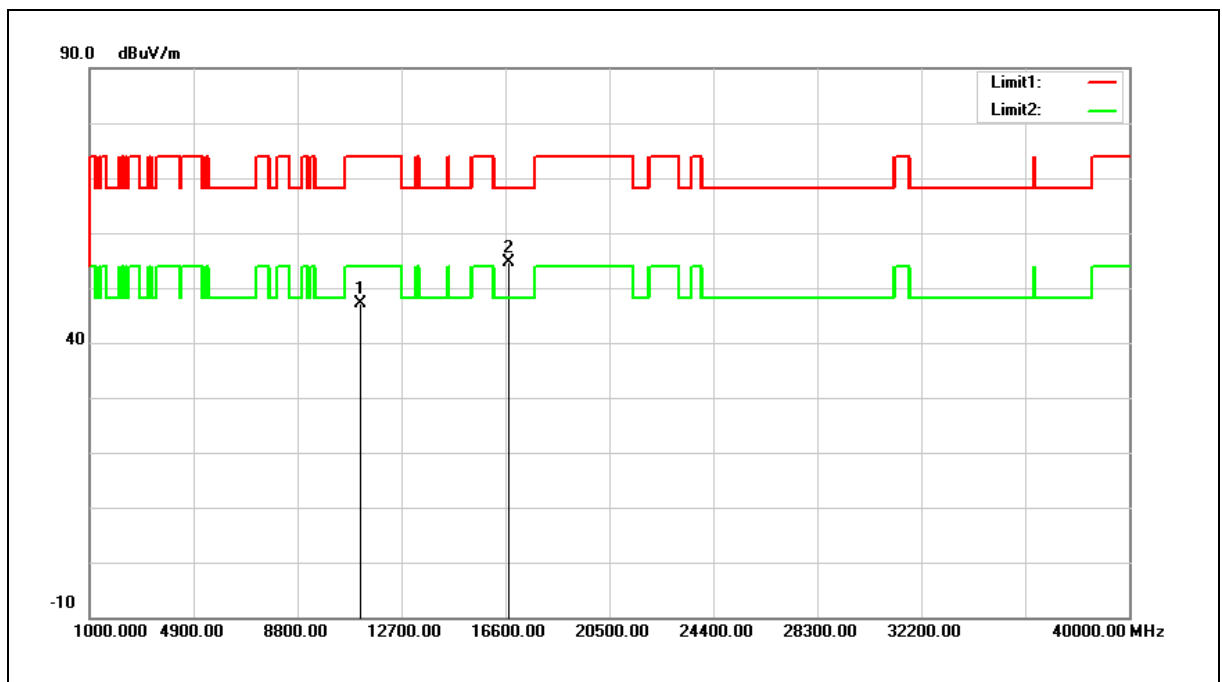

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11140.000	28.61	18.48	47.09	74.00	-26.91	peak
2	16710.000	32.82	21.80	54.62	68.20	-13.58	peak


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

系列型號: KLV-W19

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 110 V/60 Hz
Frequency:	5700 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 6		
Ant.Polar.:	Horizontal		

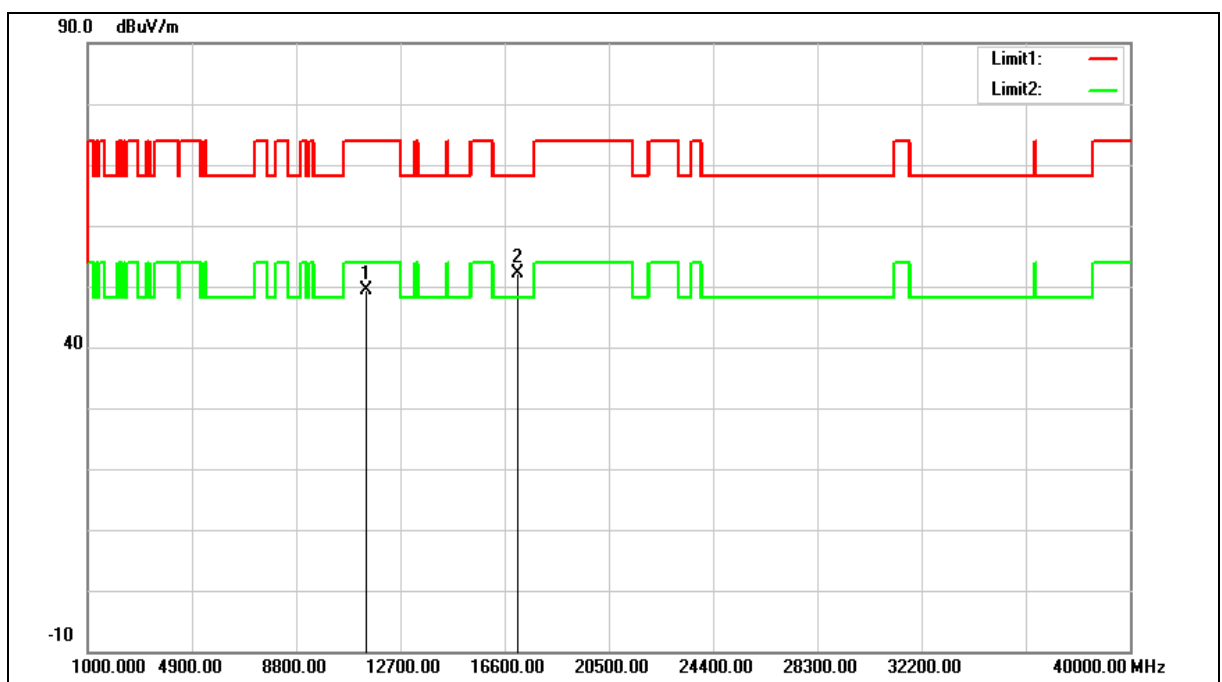


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11400.000	30.98	18.46	49.44	74.00	-24.56	peak
2	17100.000	28.57	23.62	52.19	68.20	-16.01	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 110 V/60 Hz
Frequency:	5700 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 6		
Ant.Polar.:	Vertical		

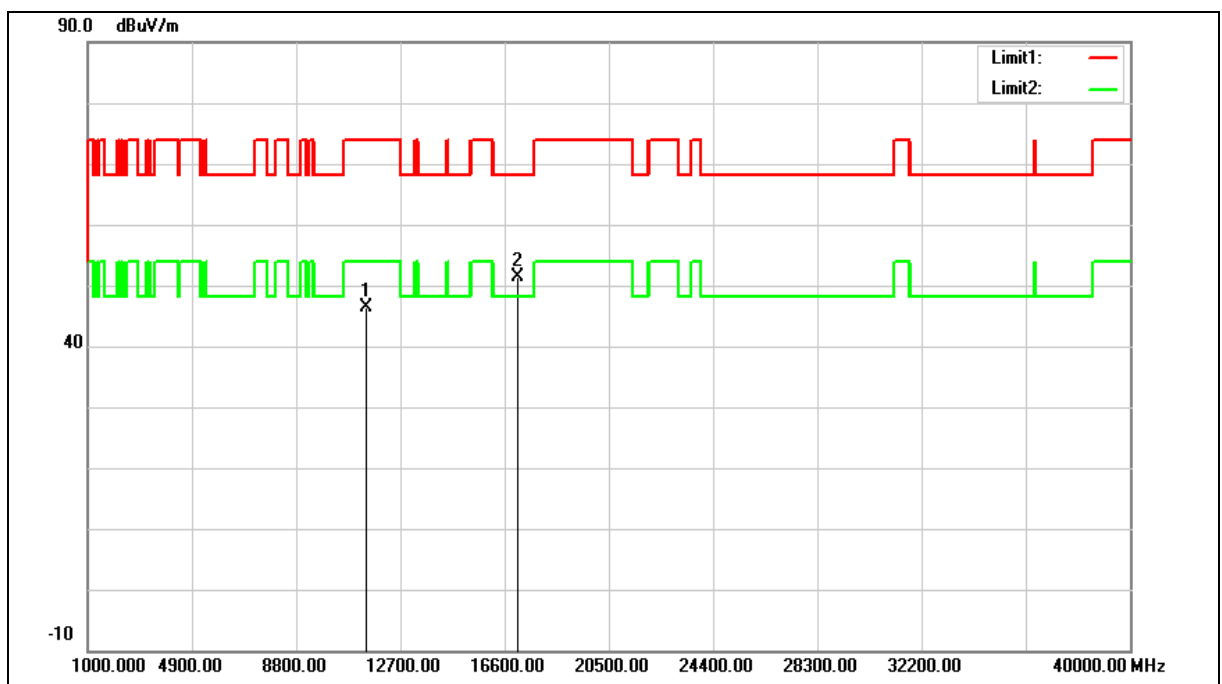

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11400.000	27.91	18.46	46.37	74.00	-27.63	peak
2	17100.000	27.67	23.62	51.29	68.20	-16.91	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

主型號: KLV-W29 (HDMI Mode)

Standard: LP0002

Test Distance: 3 m

Test item: Harmonic


Power: AC 110 V/60 Hz

Frequency: 5700 MHz

Temp.(°C)/Hum.(%RH): 26(°C)/60 %RH

Mode: Mode 6

Ant.Polar.: Horizontal

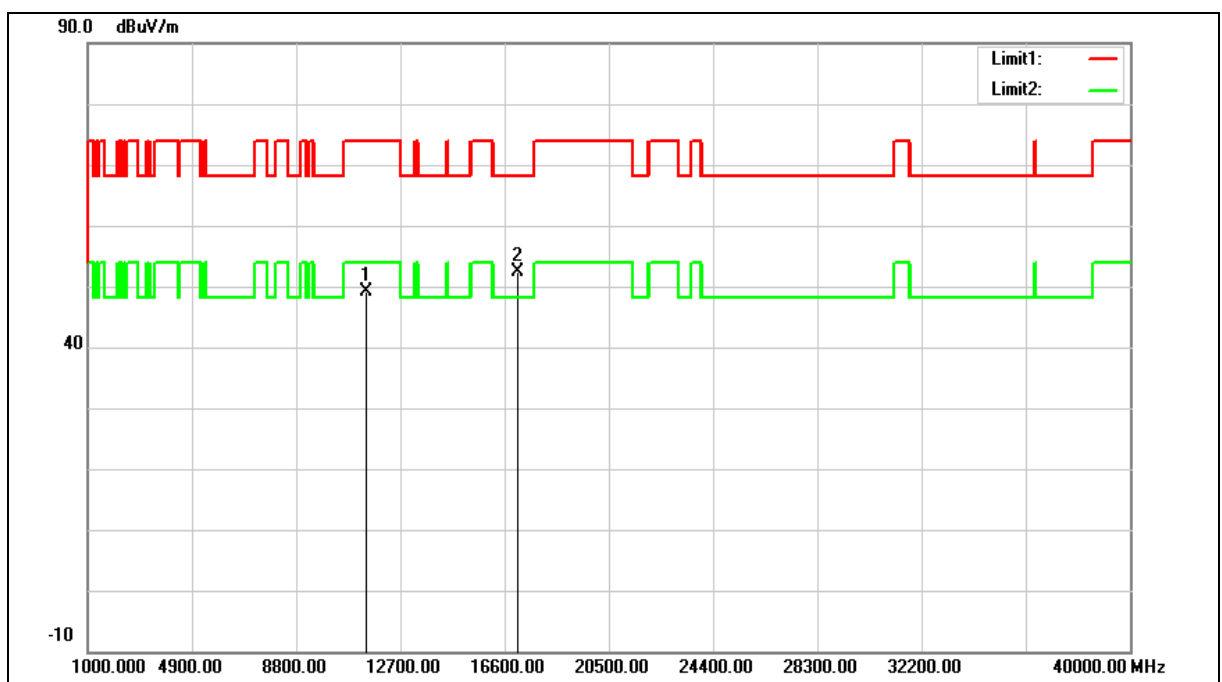


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11400.000	30.74	18.46	49.20	74.00	-24.80	peak
2	17100.000	28.71	23.62	52.33	68.20	-15.87	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 110 V/60 Hz
Frequency:	5700 MHz	Temp.(°C)/Hum. (%RH):	26(°C)/60 %RH
Mode:	Mode 6		
Ant.Polar.:	Vertical		

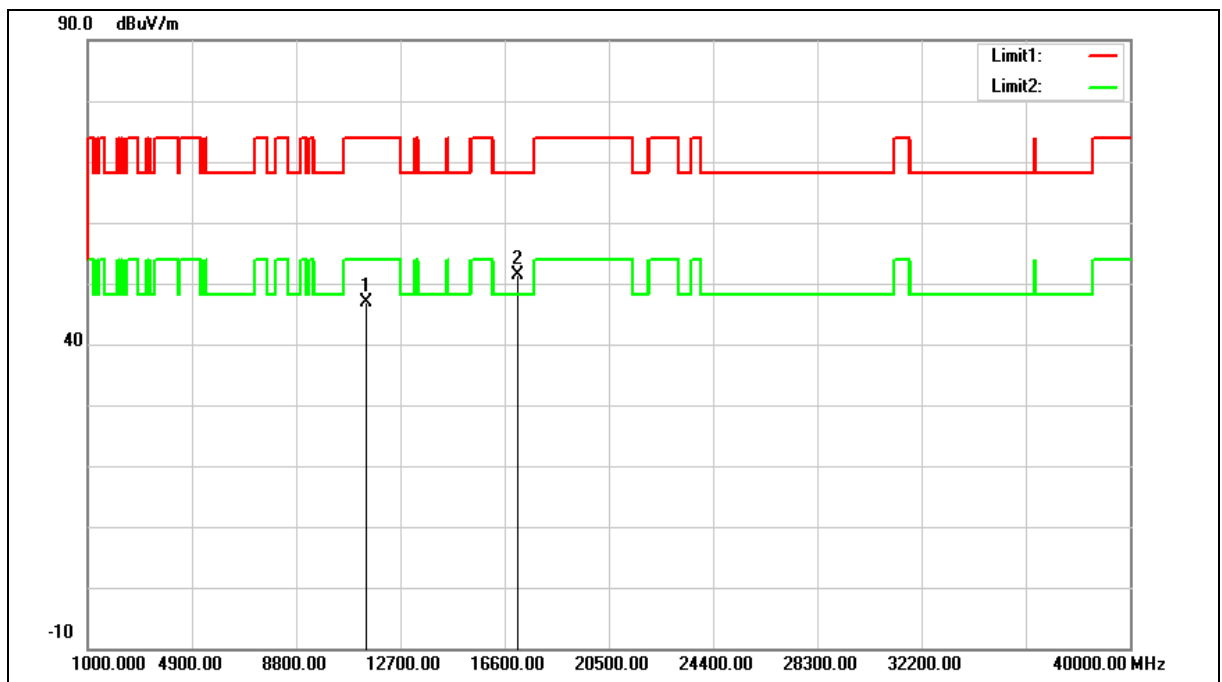

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11400.000	28.35	18.46	46.81	74.00	-27.19	peak
2	17100.000	27.76	23.62	51.38	68.20	-16.82	peak


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

系列型號: KLV-W19 (HDMI Mode)

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 110 V/60 Hz
Frequency:	5700 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 6		
Ant.Polar.:	Horizontal		

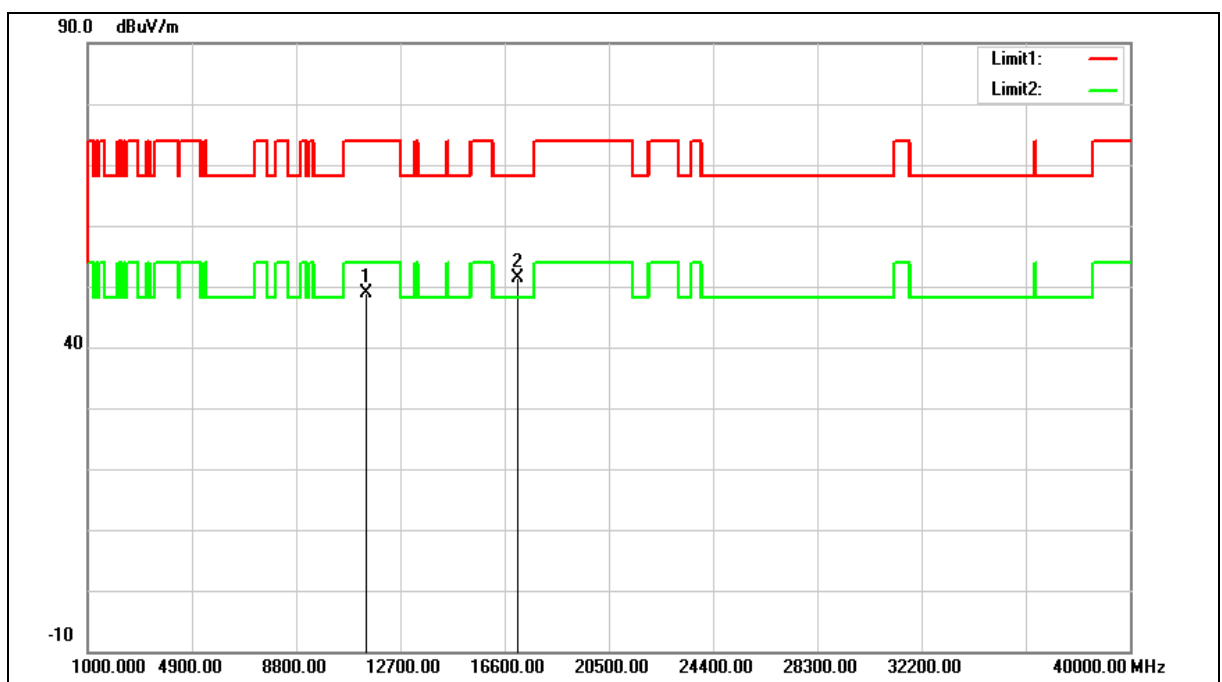


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11400.000	30.46	18.46	48.92	74.00	-25.08	peak
2	17100.000	27.87	23.62	51.49	68.20	-16.71	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 110 V/60 Hz
Frequency:	5700 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 6		
Ant.Polar.:	Vertical		

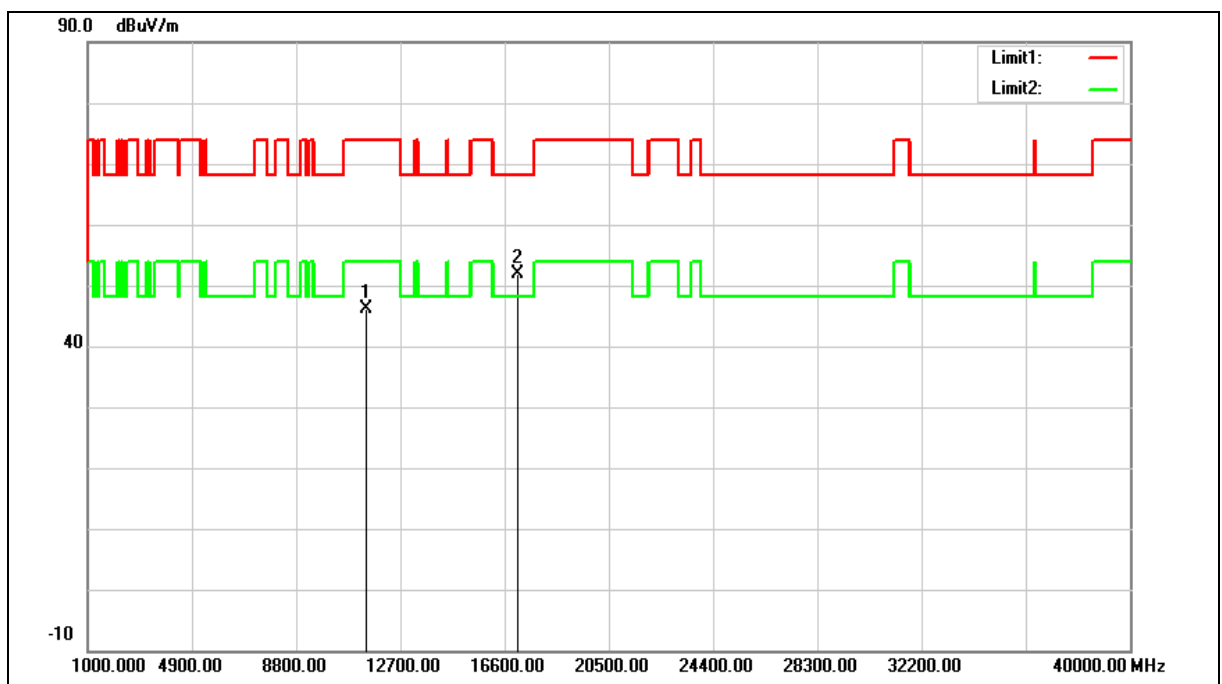


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11400.000	27.64	18.46	46.10	74.00	-27.90	peak
2	17100.000	28.26	23.62	51.88	68.20	-16.32	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 110 V/60 Hz
Test Mode:	Simultaneous Transmitting (5 GHz WLAN+BT)	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Ant.Polar.:	Horizontal		

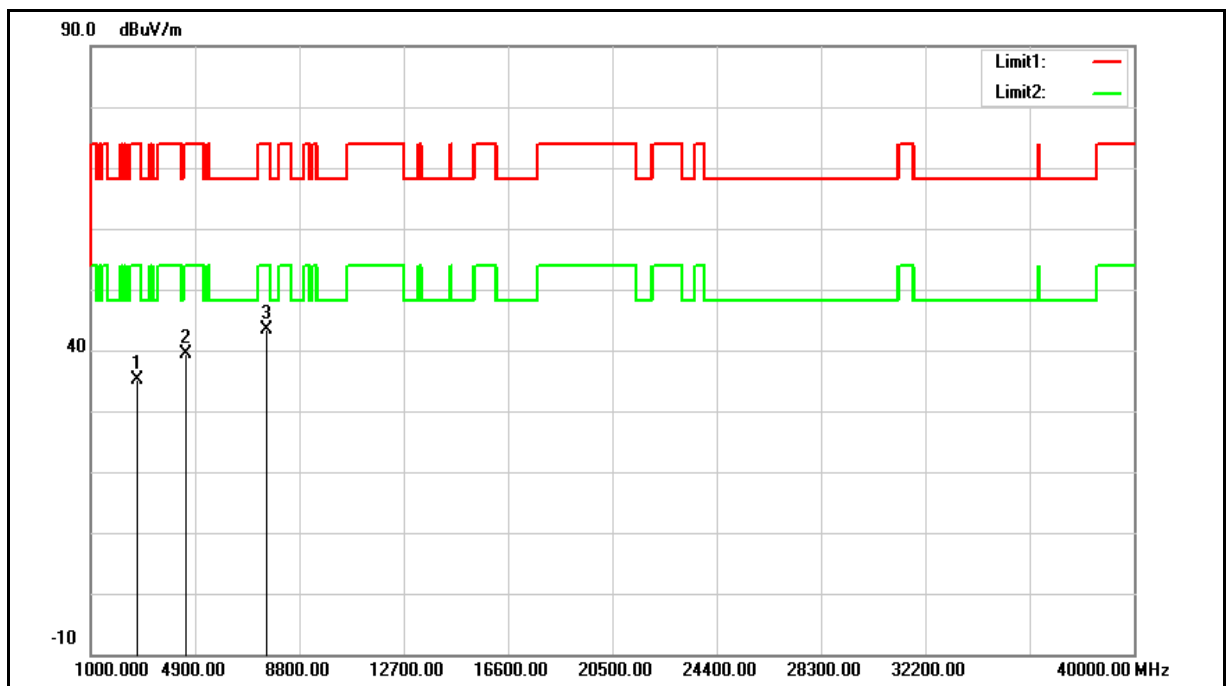


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2751.000	35.13	-0.03	35.10	74.00	-38.90	peak
2	4519.000	34.68	4.75	39.43	74.00	-34.57	peak
3	7579.000	30.40	12.90	43.30	74.00	-30.70	peak

Note: 1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 110 V/60 Hz
Test Mode:	Simultaneous Transmitting (5 GHz WLAN+BT)	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Ant.Polar.:	Vertical		

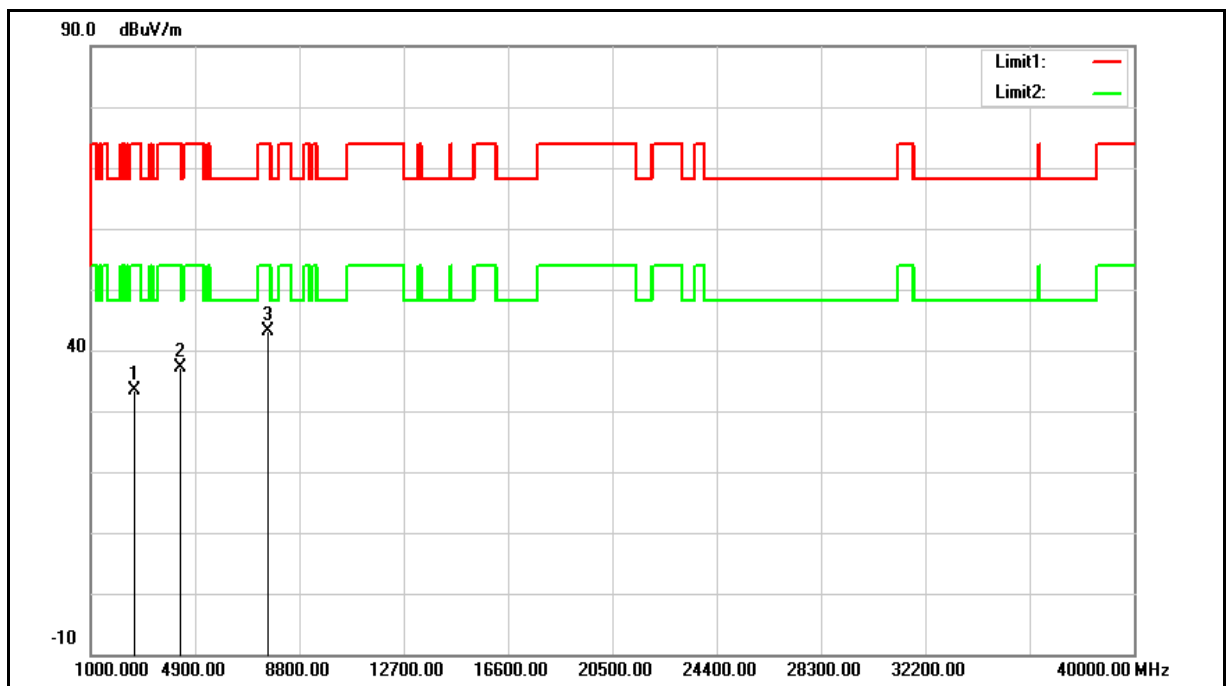


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2615.000	33.76	-0.42	33.34	74.00	-40.66	peak
2	4349.000	33.00	4.20	37.20	74.00	-36.80	peak
3	7647.000	30.13	13.09	43.22	74.00	-30.78	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 110 V/60 Hz
Frequency:	5180 MHz	Temp.(°C)/Hum. (%RH):	26(°C)/60 %RH
Mode:	Mode 13		
Ant.Polar.:	Horizontal		

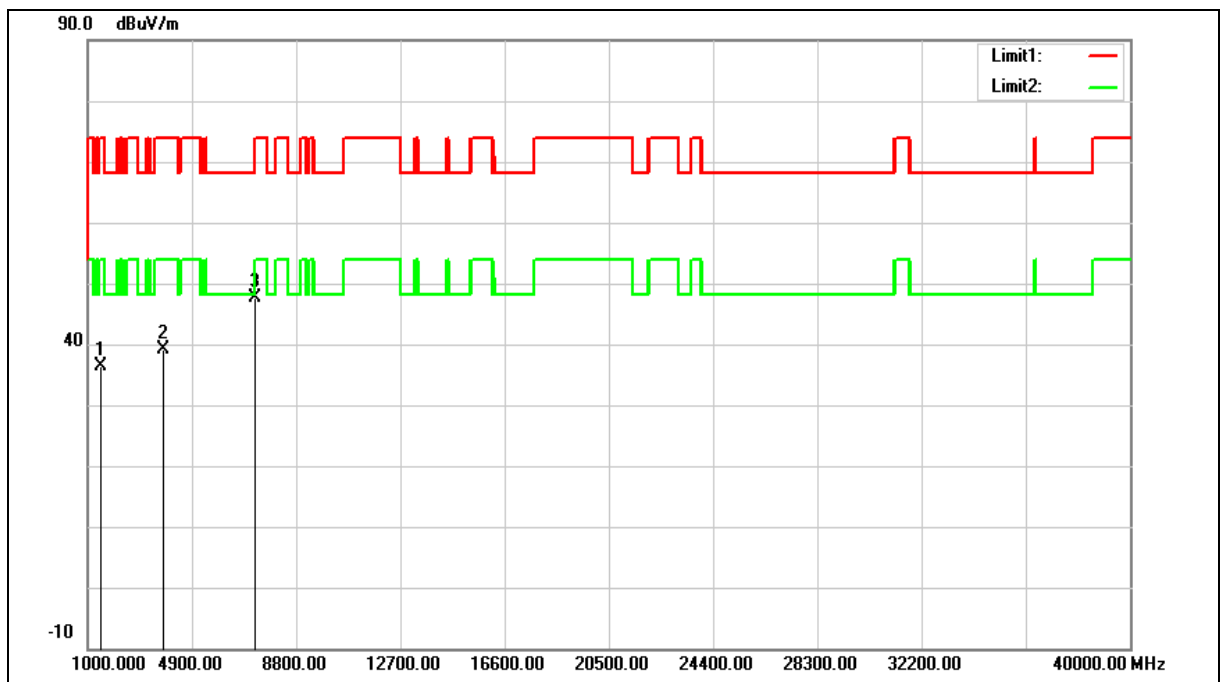


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1493.000	40.97	-4.67	36.30	74.00	-37.70	peak
2	3839.000	36.51	2.56	39.07	74.00	-34.93	peak
3	7256.000	35.68	11.94	47.62	74.00	-26.38	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 110 V/60 Hz
Frequency:	5180 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 13		
Ant.Polar.:	Vertical		

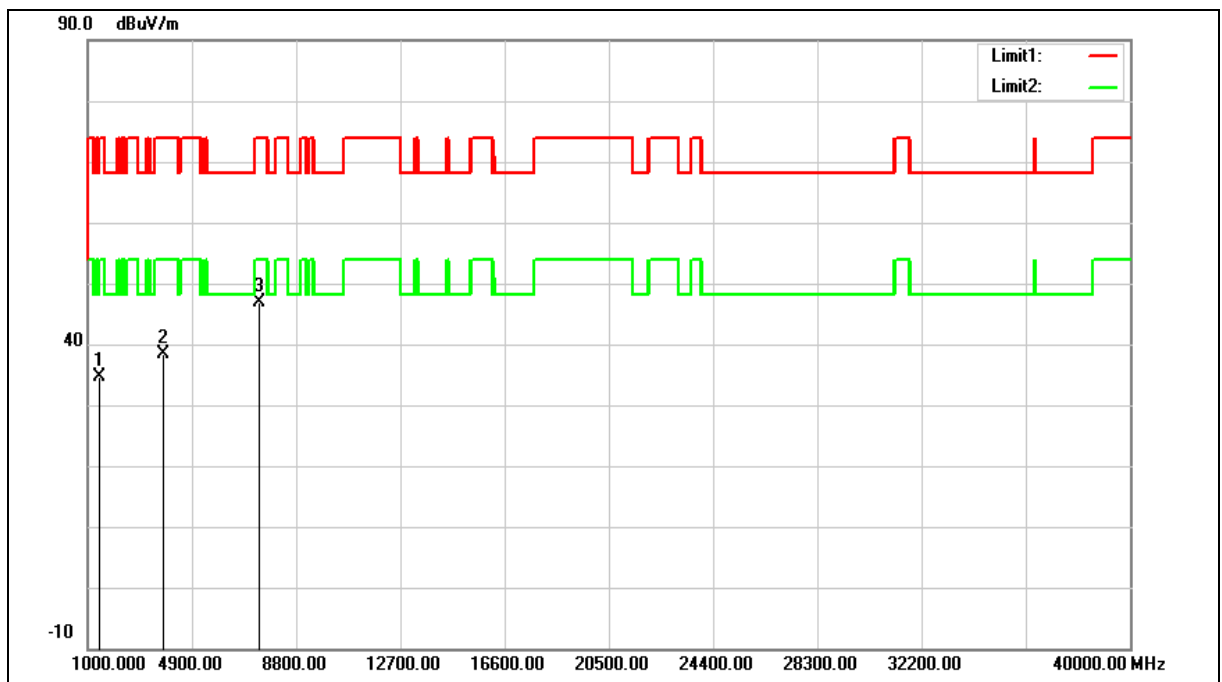

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1425.000	39.56	-4.97	34.59	74.00	-39.41	peak
2	3822.000	35.86	2.52	38.38	74.00	-35.62	peak
3	7409.000	34.56	12.43	46.99	74.00	-27.01	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).


2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

頻帶邊緣

附註: 其上下邊緣落於低功率射頻電機第 2.7 節所列頻帶內之混附發射, 其電場強度必須符合第 2.8 節的限制規定。

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5180 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 6		
Ant.Polar.:	Horizontal		

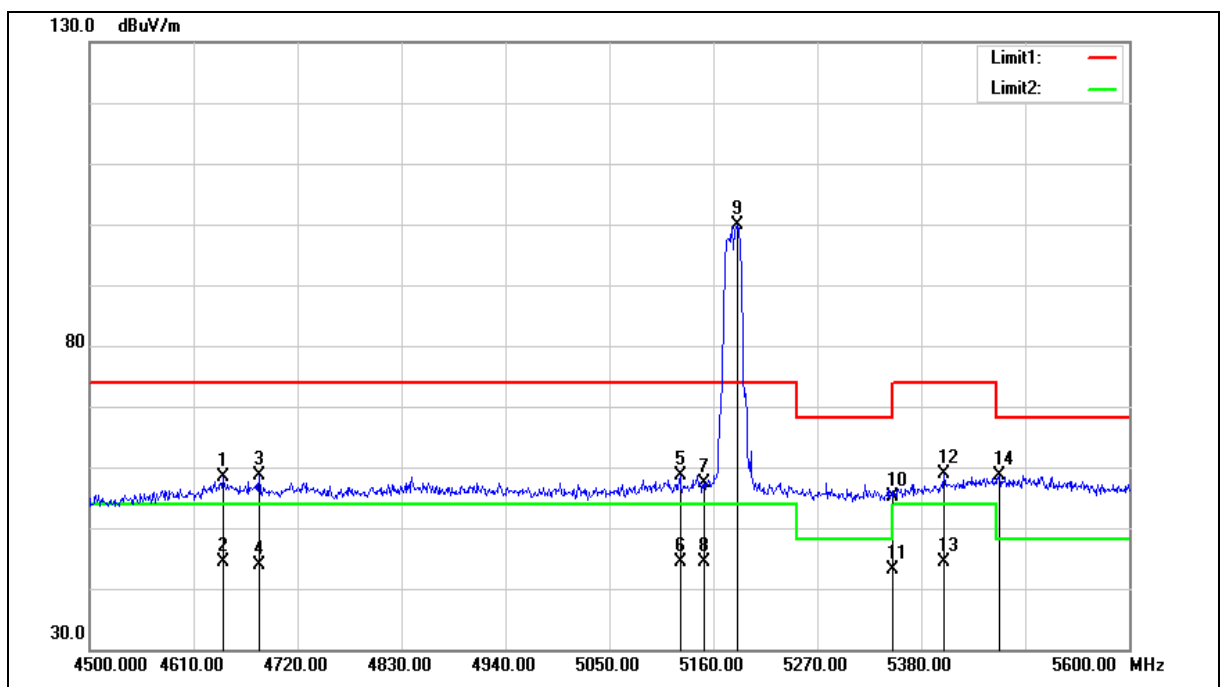

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5180 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 6		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4640.800	53.30	5.00	58.30	74.00	-15.70	peak
2	4640.800	39.50	5.00	44.50	54.00	-9.50	AVG
3	4679.300	53.60	5.07	58.67	74.00	-15.33	peak
4	4679.300	38.84	5.07	43.91	54.00	-10.09	AVG
5	5124.800	52.52	6.01	58.53	74.00	-15.47	peak
6	5124.800	38.33	6.01	44.34	54.00	-9.66	AVG
7	5150.000	51.33	6.07	57.40	74.00	-16.60	peak
8	5150.000	38.40	6.07	44.47	54.00	-9.53	AVG
9	5185.300	93.86	6.14	100.00	--	--	peak
10	5350.000	48.50	6.52	55.02	74.00	-18.98	peak
11	5350.000	36.64	6.52	43.16	54.00	-10.84	AVG
12	5404.200	52.33	6.64	58.97	74.00	-15.03	peak
13	5404.200	37.78	6.64	44.42	54.00	-9.58	AVG
14	5462.500	51.89	6.78	58.67	68.20	-9.53	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5180 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 6		
Ant.Polar.:	Vertical		

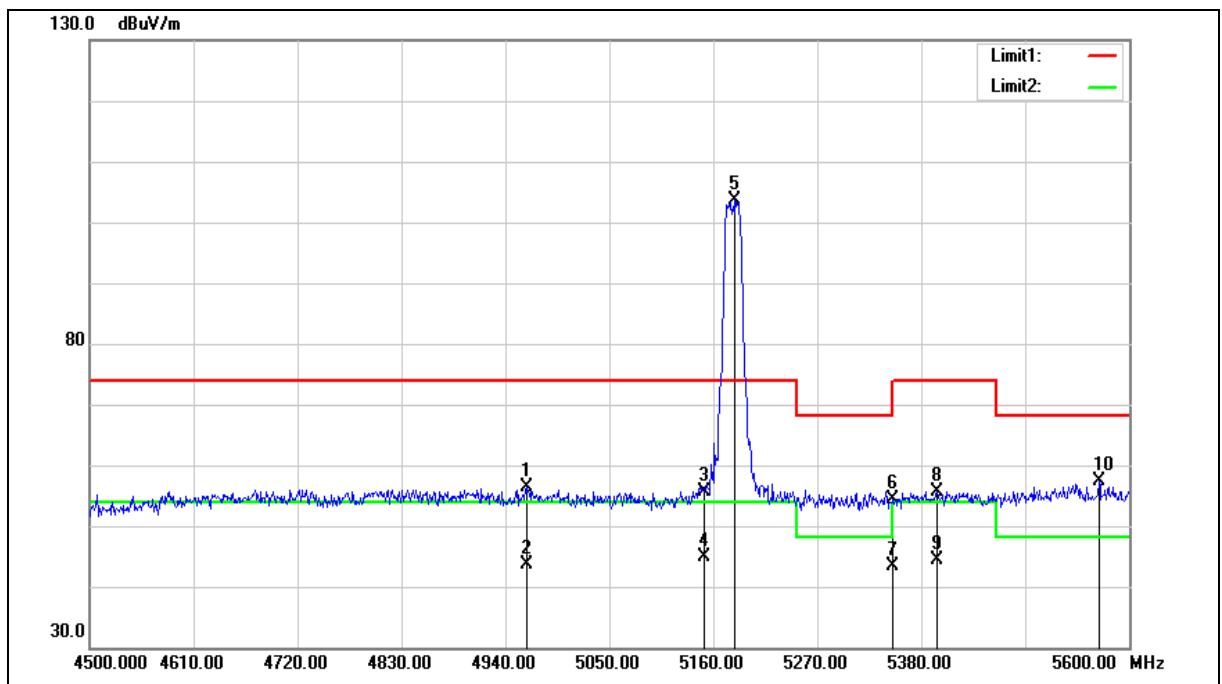

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5180 MHz	Temp.(°C)/Hum. (%RH):	26(°C)/60 %RH
Mode:	Mode 6		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4962.000	50.81	5.64	56.45	74.00	-17.55	peak
2	4962.000	37.89	5.64	43.53	54.00	-10.47	AVG
3	5150.000	49.44	6.07	55.51	74.00	-18.49	peak
4	5150.000	38.85	6.07	44.92	54.00	-9.08	AVG
5	5182.000	97.61	6.14	103.75	--	--	peak
6	5350.000	47.86	6.52	54.38	74.00	-19.62	peak
7	5350.000	36.78	6.52	43.30	54.00	-10.70	AVG
8	5396.500	49.04	6.62	55.66	74.00	-18.34	peak
9	5396.500	37.64	6.62	44.26	54.00	-9.74	AVG
10	5568.100	50.29	7.00	57.29	68.20	-10.91	peak

Note: 1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5320 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 6		
Ant.Polar.:	Horizontal		

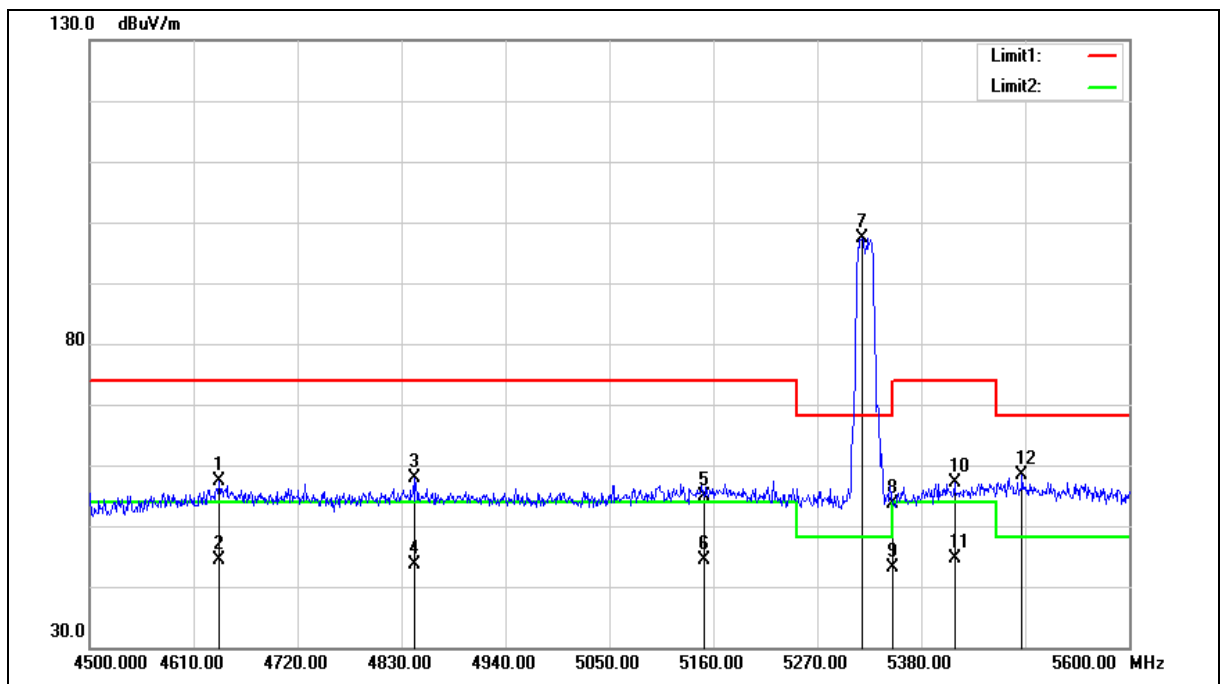

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5320 MHz	Temp.(°C)/Hum. (%RH):	26(°C)/60 %RH
Mode:	Mode 6		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4637.500	52.42	5.00	57.42	74.00	-16.58	peak
2	4637.500	39.34	5.00	44.34	54.00	-9.66	AVG
3	4843.200	52.46	5.42	57.88	74.00	-16.12	peak
4	4843.200	38.31	5.42	43.73	54.00	-10.27	AVG
5	5150.000	48.90	6.07	54.97	74.00	-19.03	peak
6	5150.000	38.39	6.07	44.46	54.00	-9.54	AVG
7	5317.300	90.92	6.45	97.37	--	--	peak
8	5350.000	47.13	6.52	53.65	74.00	-20.35	peak
9	5350.000	36.59	6.52	43.11	54.00	-10.89	AVG
10	5415.200	50.42	6.67	57.09	74.00	-16.91	peak
11	5415.200	37.87	6.67	44.54	54.00	-9.46	AVG
12	5486.700	51.44	6.83	58.27	68.20	-9.93	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5320 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 6		
Ant.Polar.:	Vertical		

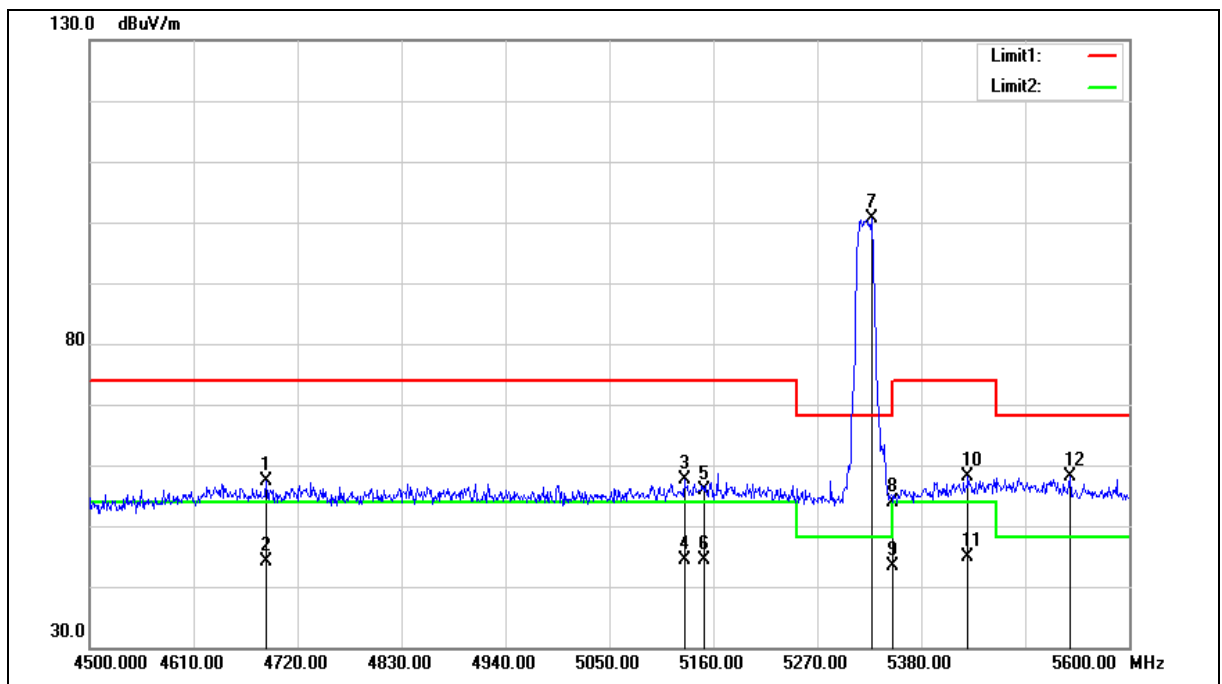

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5320 MHz	Temp.(°C)/Hum. (%RH):	26(°C)/60 %RH
Mode:	Mode 6		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4687.000	52.27	5.08	57.35	74.00	-16.65	peak
2	4687.000	39.02	5.08	44.10	54.00	-9.90	AVG
3	5129.200	51.54	6.02	57.56	74.00	-16.44	peak
4	5129.200	38.36	6.02	44.38	54.00	-9.62	AVG
5	5150.000	49.82	6.07	55.89	74.00	-18.11	peak
6	5150.000	38.41	6.07	44.48	54.00	-9.52	AVG
7	5327.200	94.27	6.47	100.74	--	--	peak
8	5350.000	47.41	6.52	53.93	74.00	-20.07	peak
9	5350.000	36.98	6.52	43.50	54.00	-10.50	AVG
10	5429.500	51.51	6.70	58.21	74.00	-15.79	peak
11	5429.500	38.11	6.70	44.81	54.00	-9.19	AVG
12	5537.300	51.28	6.94	58.22	68.20	-9.98	peak

Note: 1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5500 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 6		
Ant.Polar.:	Horizontal		

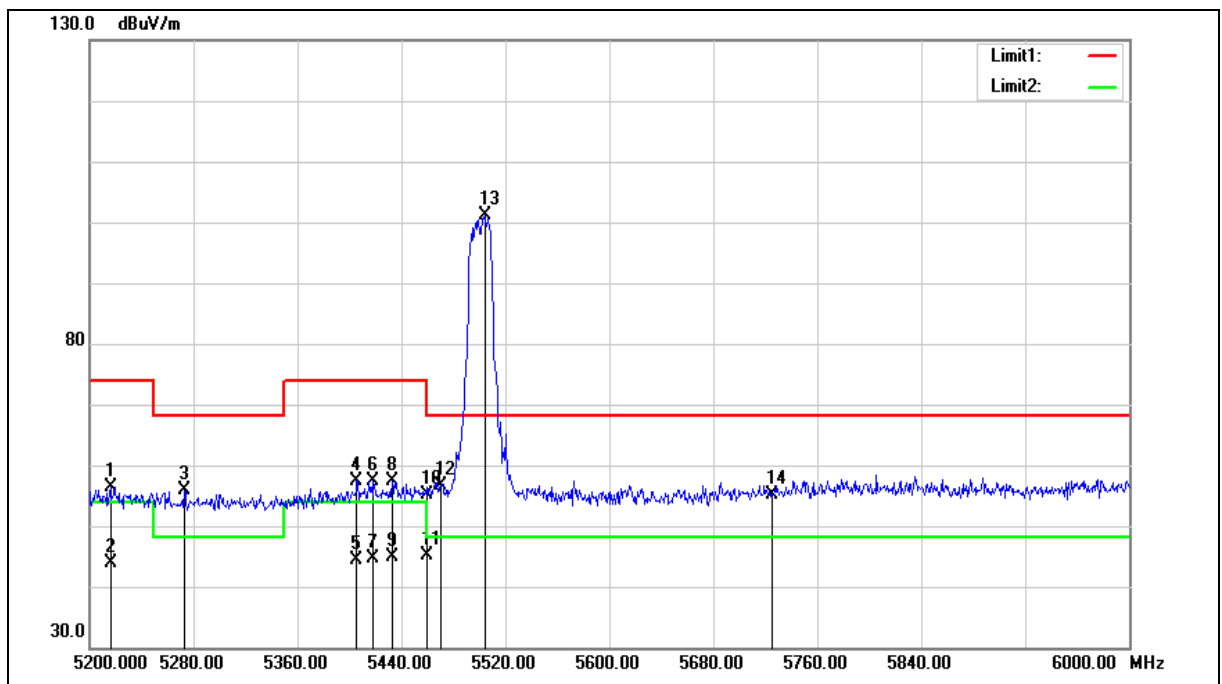

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5500 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 6		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5216.000	50.17	6.22	56.39	74.00	-17.61	peak
2	5216.000	37.72	6.22	43.94	54.00	-10.06	AVG
3	5272.800	49.50	6.35	55.85	68.20	-12.35	peak
4	5405.600	50.69	6.64	57.33	74.00	-16.67	peak
5	5405.600	37.79	6.64	44.43	54.00	-9.57	AVG
6	5417.600	50.69	6.68	57.37	74.00	-16.63	peak
7	5417.600	37.89	6.68	44.57	54.00	-9.43	AVG
8	5432.800	50.56	6.71	57.27	74.00	-16.73	peak
9	5432.800	38.15	6.71	44.86	54.00	-9.14	AVG
10	5460.000	48.24	6.77	55.01	74.00	-18.99	peak
11	5460.000	38.36	6.77	45.13	54.00	-8.87	AVG
12	5470.000	49.91	6.80	56.71	68.20	-11.49	peak
13	5504.000	94.29	6.87	101.16	--	--	peak
14	5725.000	47.88	7.32	55.20	68.20	-13.00	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5500 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 6		
Ant.Polar.:	Vertical		

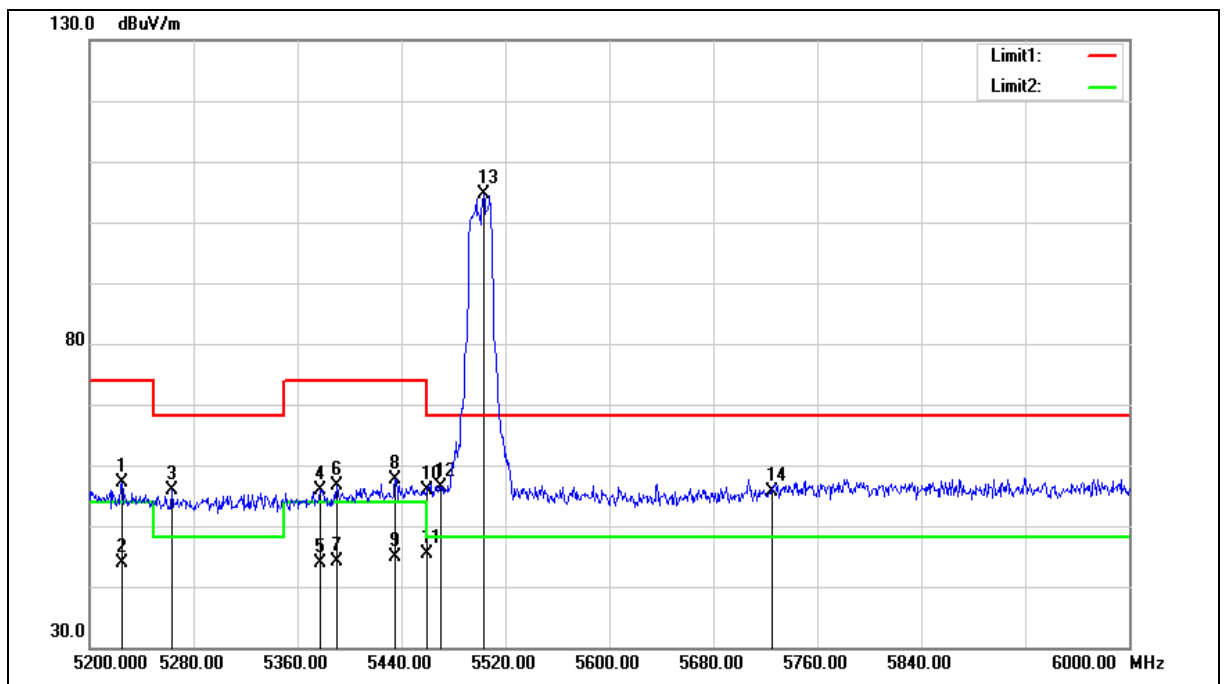

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5500 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 6		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5224.800	50.84	6.23	57.07	74.00	-16.93	peak
2	5224.800	37.65	6.23	43.88	54.00	-10.12	AVG
3	5263.200	49.60	6.33	55.93	68.20	-12.27	peak
4	5377.600	49.32	6.58	55.90	74.00	-18.10	peak
5	5377.600	37.22	6.58	43.80	54.00	-10.20	AVG
6	5390.400	50.05	6.61	56.66	74.00	-17.34	peak
7	5390.400	37.48	6.61	44.09	54.00	-9.91	AVG
8	5435.200	50.96	6.71	57.67	74.00	-16.33	peak
9	5435.200	38.24	6.71	44.95	54.00	-9.05	AVG
10	5460.000	49.22	6.77	55.99	74.00	-18.01	peak
11	5460.000	38.67	6.77	45.44	54.00	-8.56	AVG
12	5470.000	49.60	6.80	56.40	68.20	-11.80	peak
13	5503.200	97.72	6.87	104.59	--	--	peak
14	5725.000	48.33	7.32	55.65	68.20	-12.55	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5700 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 6		
Ant.Polar.:	Horizontal		

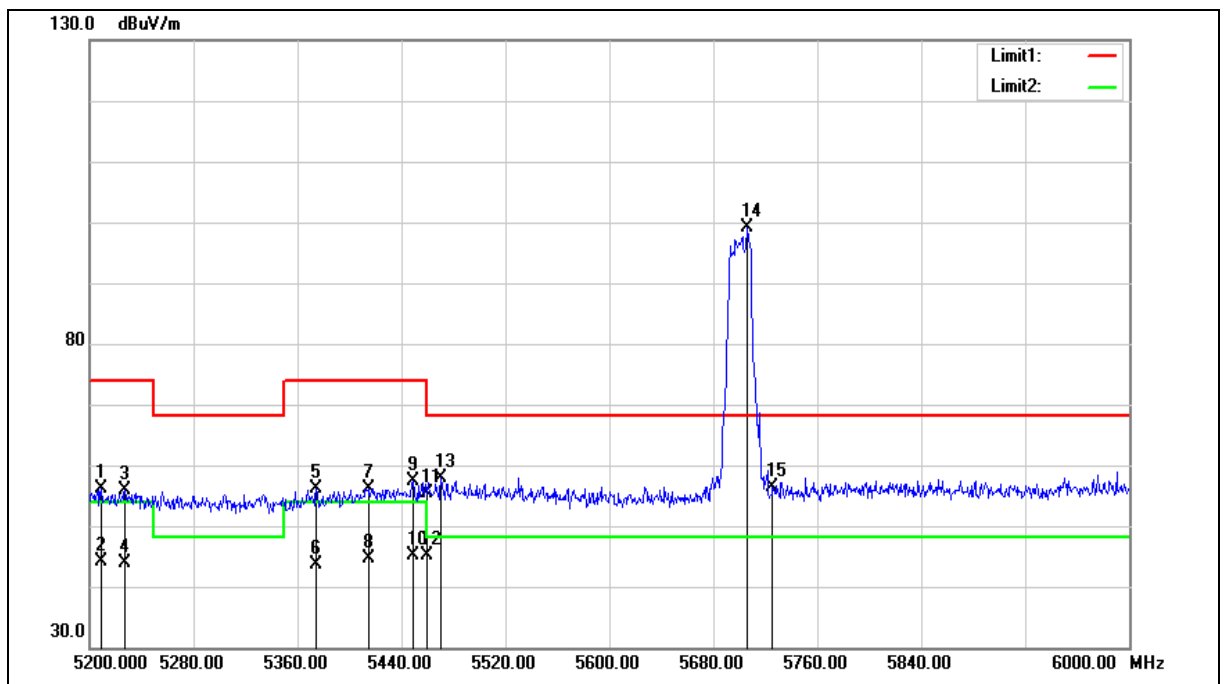

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5700 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 6		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5208.800	49.81	6.20	56.01	74.00	-17.99	peak
2	5208.800	37.96	6.20	44.16	54.00	-9.84	AVG
3	5227.200	49.61	6.24	55.85	74.00	-18.15	peak
4	5227.200	37.59	6.24	43.83	54.00	-10.17	AVG
5	5374.400	49.54	6.57	56.11	74.00	-17.89	peak
6	5374.400	37.11	6.57	43.68	54.00	-10.32	AVG
7	5414.400	49.57	6.67	56.24	74.00	-17.76	peak
8	5414.400	37.88	6.67	44.55	54.00	-9.45	AVG
9	5448.800	50.74	6.75	57.49	74.00	-16.51	peak
10	5448.800	38.31	6.75	45.06	54.00	-8.94	AVG
11	5460.000	48.66	6.77	55.43	74.00	-18.57	peak
12	5460.000	38.31	6.77	45.08	54.00	-8.92	AVG
13	5470.000	50.98	6.80	57.78	68.20	-10.42	peak
14	5705.600	91.83	7.29	99.12	--	--	peak
15	5725.000	48.95	7.32	56.27	68.20	-11.93	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5700 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 6		
Ant.Polar.:	Vertical		

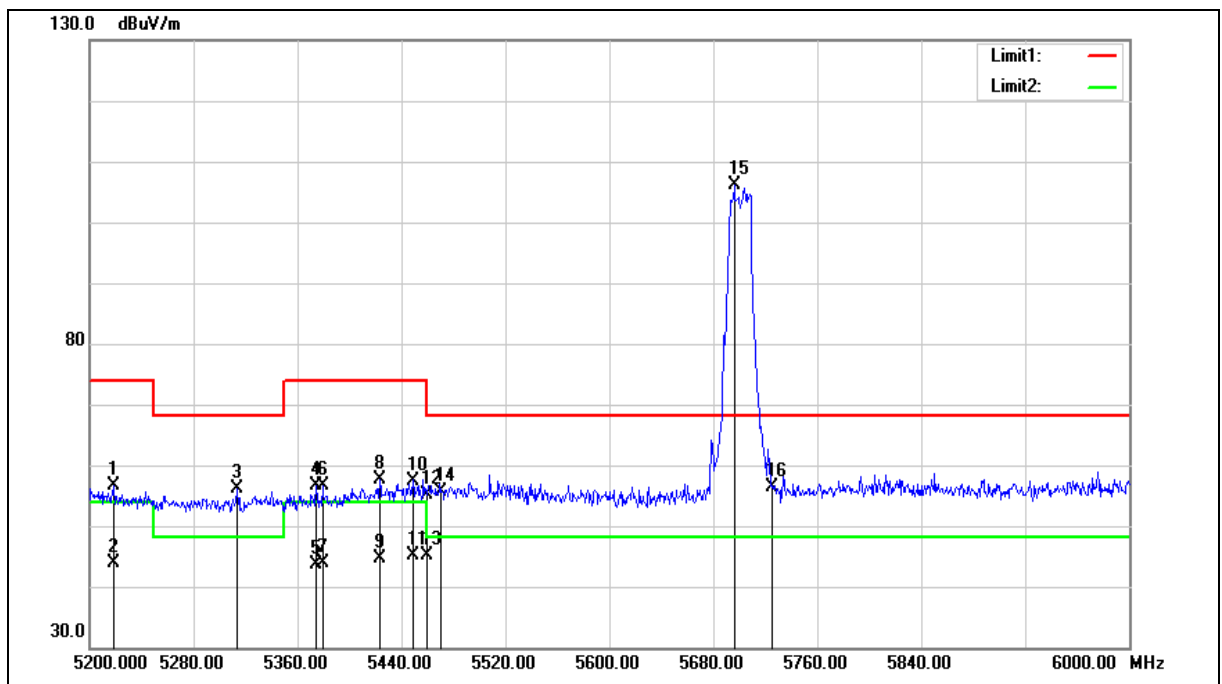

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5700 MHz	Temp.(°C)/Hum. (%RH):	26(°C)/60 %RH
Mode:	Mode 6		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5218.400	50.48	6.22	56.70	74.00	-17.30	peak
2	5218.400	37.68	6.22	43.90	54.00	-10.10	AVG
3	5313.600	49.60	6.44	56.04	68.20	-12.16	peak
4	5374.400	49.98	6.57	56.55	74.00	-17.45	peak
5	5374.400	37.05	6.57	43.62	54.00	-10.38	AVG
6	5379.200	49.99	6.58	56.57	74.00	-17.43	peak
7	5379.200	37.19	6.58	43.77	54.00	-10.23	AVG
8	5423.200	50.85	6.69	57.54	74.00	-16.46	peak
9	5423.200	38.00	6.69	44.69	54.00	-9.31	AVG
10	5448.800	50.75	6.75	57.50	74.00	-16.50	peak
11	5448.800	38.27	6.75	45.02	54.00	-8.98	AVG
12	5460.000	48.30	6.77	55.07	74.00	-18.93	peak
13	5460.000	38.29	6.77	45.06	54.00	-8.94	AVG
14	5470.000	48.78	6.80	55.58	68.20	-12.62	peak
15	5696.000	98.80	7.26	106.06	--	--	peak
16	5725.000	49.13	7.32	56.45	68.20	-11.75	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5745 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 6		
Ant.Polar.:	Horizontal		

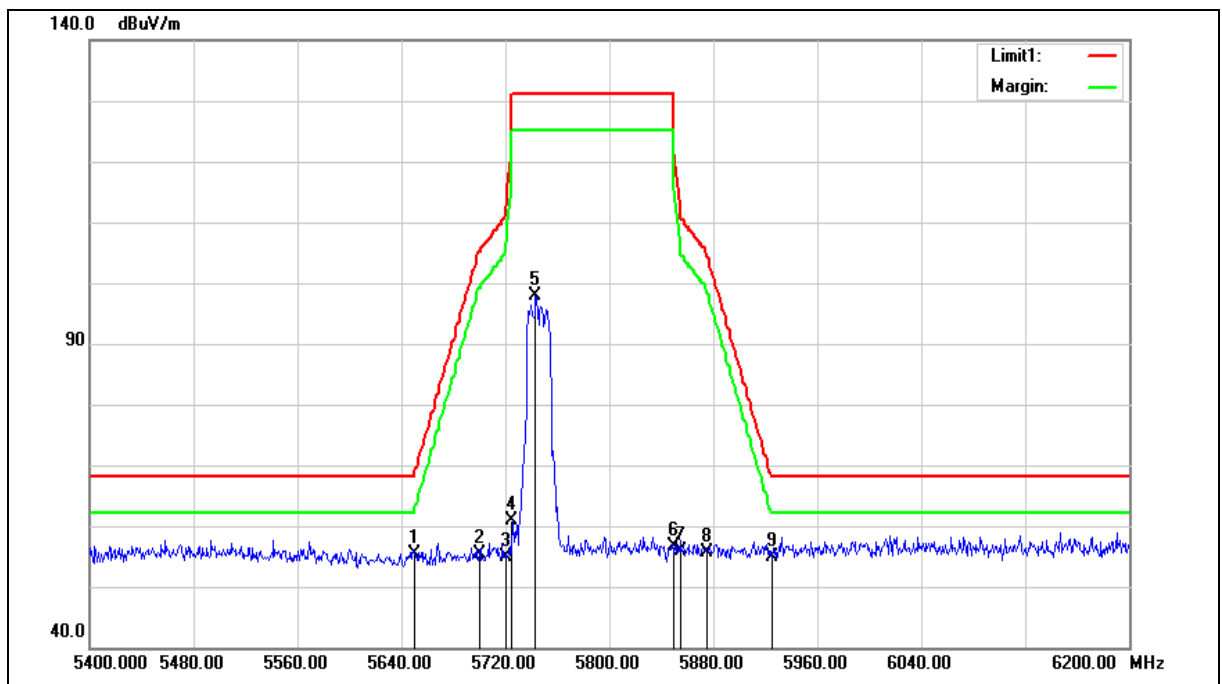

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5745 MHz	Temp.(°C)/Hum. (%RH):	26(°C)/60 %RH
Mode:	Mode 6		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5650.000	48.31	7.17	55.48	68.20	-12.72	peak
2	5700.000	48.00	7.27	55.27	105.20	-49.93	peak
3	5720.000	47.69	7.31	55.00	110.80	-55.80	peak
4	5725.000	53.67	7.32	60.99	122.20	-61.21	peak
5	5743.200	90.63	7.36	97.99	--	--	peak
6	5850.000	49.05	7.59	56.64	122.20	-65.56	peak
7	5855.000	48.25	7.60	55.85	110.80	-54.95	peak
8	5875.000	47.97	7.64	55.61	105.20	-49.59	peak
9	5925.000	47.21	7.75	54.96	68.20	-13.24	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5745 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 6		
Ant.Polar.:	Vertical		

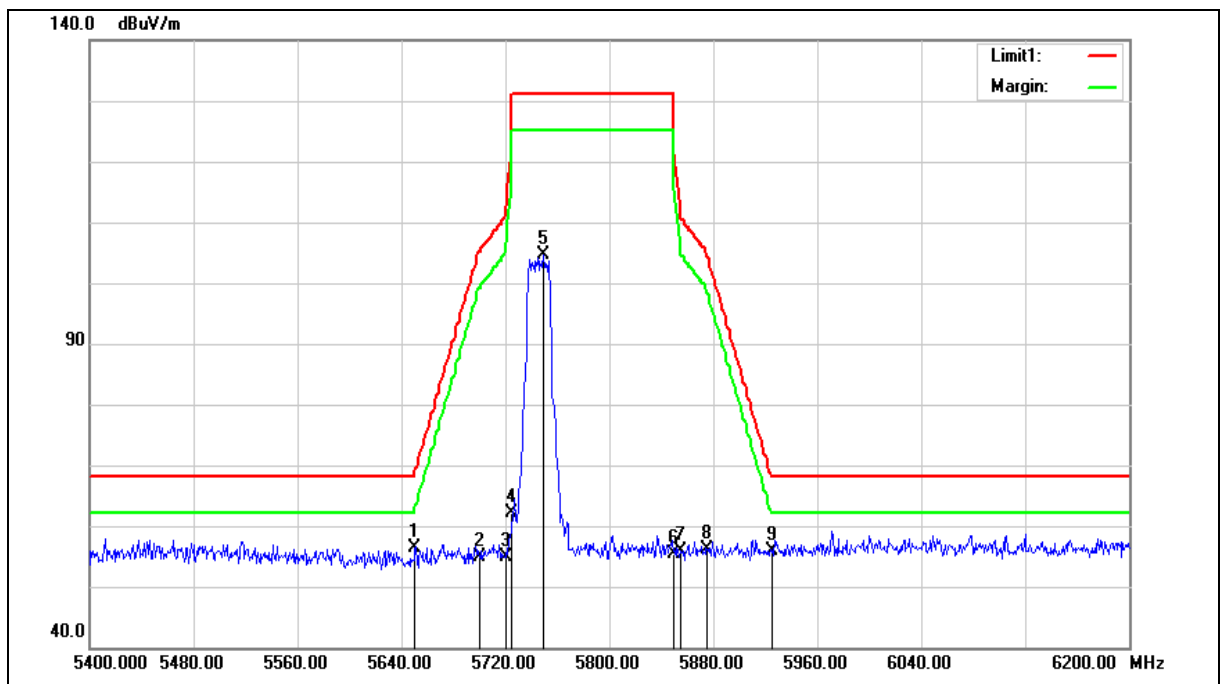

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5745 MHz	Temp.(°C)/Hum. (%RH):	26(°C)/60 %RH
Mode:	Mode 6		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5650.000	49.28	7.17	56.45	68.20	-11.75	peak
2	5700.000	47.55	7.27	54.82	105.20	-50.38	peak
3	5720.000	47.59	7.31	54.90	110.80	-55.90	peak
4	5725.000	54.79	7.32	62.11	122.20	-60.09	peak
5	5748.800	97.29	7.37	104.66	--	--	peak
6	5850.000	47.73	7.59	55.32	122.20	-66.88	peak
7	5855.000	48.33	7.60	55.93	110.80	-54.87	peak
8	5875.000	48.53	7.64	56.17	105.20	-49.03	peak
9	5925.000	48.09	7.75	55.84	68.20	-12.36	peak

Note: 1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5825 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 6		
Ant.Polar.:	Horizontal		

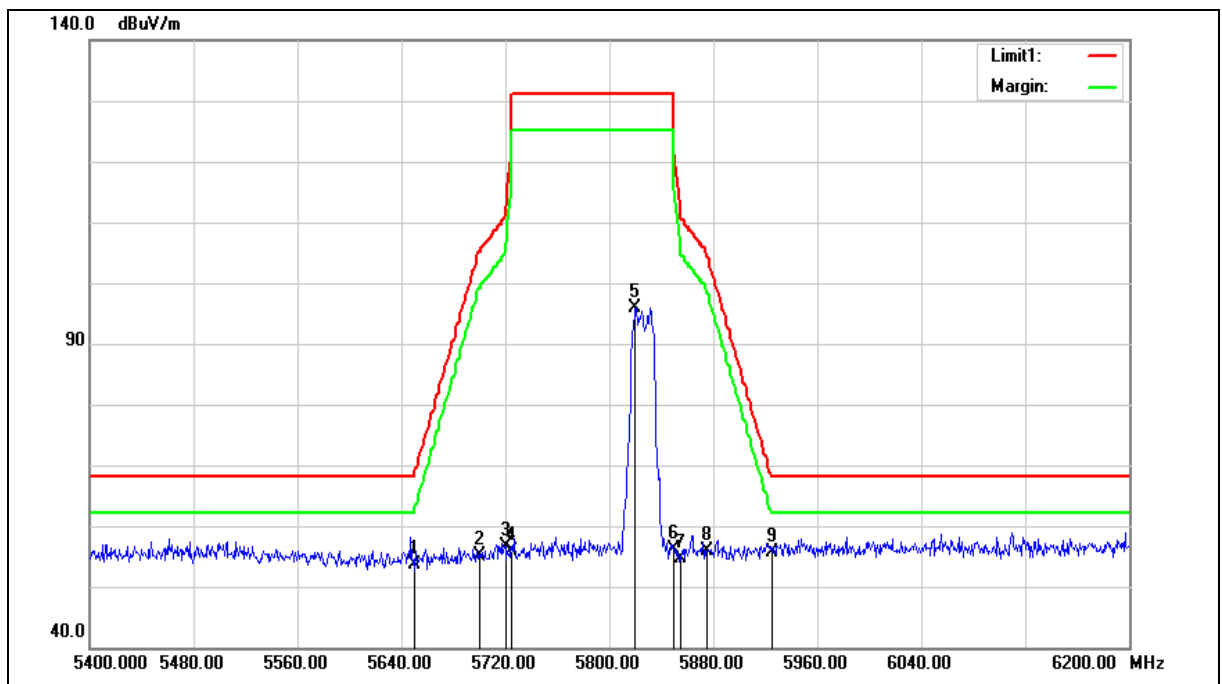

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5825 MHz	Temp.(°C)/Hum. (%RH):	26(°C)/60 %RH
Mode:	Mode 6		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5650.000	46.47	7.17	53.64	68.20	-14.56	peak
2	5700.000	47.88	7.27	55.15	105.20	-50.05	peak
3	5720.000	49.40	7.31	56.71	110.80	-54.09	peak
4	5725.000	48.65	7.32	55.97	122.20	-66.23	peak
5	5820.000	88.46	7.52	95.98	--	--	peak
6	5850.000	48.47	7.59	56.06	122.20	-66.14	peak
7	5855.000	47.13	7.60	54.73	110.80	-56.07	peak
8	5875.000	48.27	7.64	55.91	105.20	-49.29	peak
9	5925.000	47.84	7.75	55.59	68.20	-12.61	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5825 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 6		
Ant.Polar.:	Vertical		

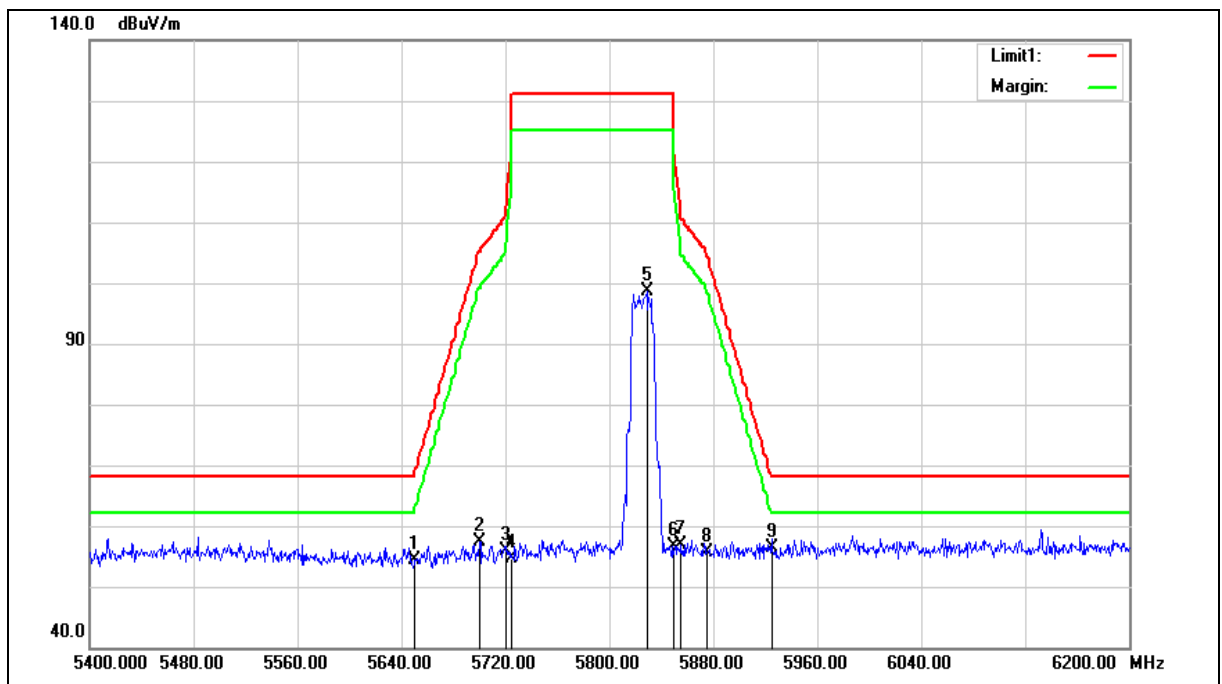

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5825 MHz	Temp.(°C)/Hum. (%RH):	26(°C)/60 %RH
Mode:	Mode 6		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5650.000	47.31	7.17	54.48	68.20	-13.72	peak
2	5700.000	50.05	7.27	57.32	105.20	-47.88	peak
3	5720.000	48.47	7.31	55.78	110.80	-55.02	peak
4	5725.000	47.25	7.32	54.57	122.20	-67.63	peak
5	5828.800	91.19	7.55	98.74	--	--	peak
6	5850.000	48.93	7.59	56.52	122.20	-65.68	peak
7	5855.000	49.24	7.60	56.84	110.80	-53.96	peak
8	5875.000	48.10	7.64	55.74	105.20	-49.46	peak
9	5925.000	48.62	7.75	56.37	68.20	-11.83	peak

Note: 1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5180 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 9		
Ant.Polar.:	Horizontal		

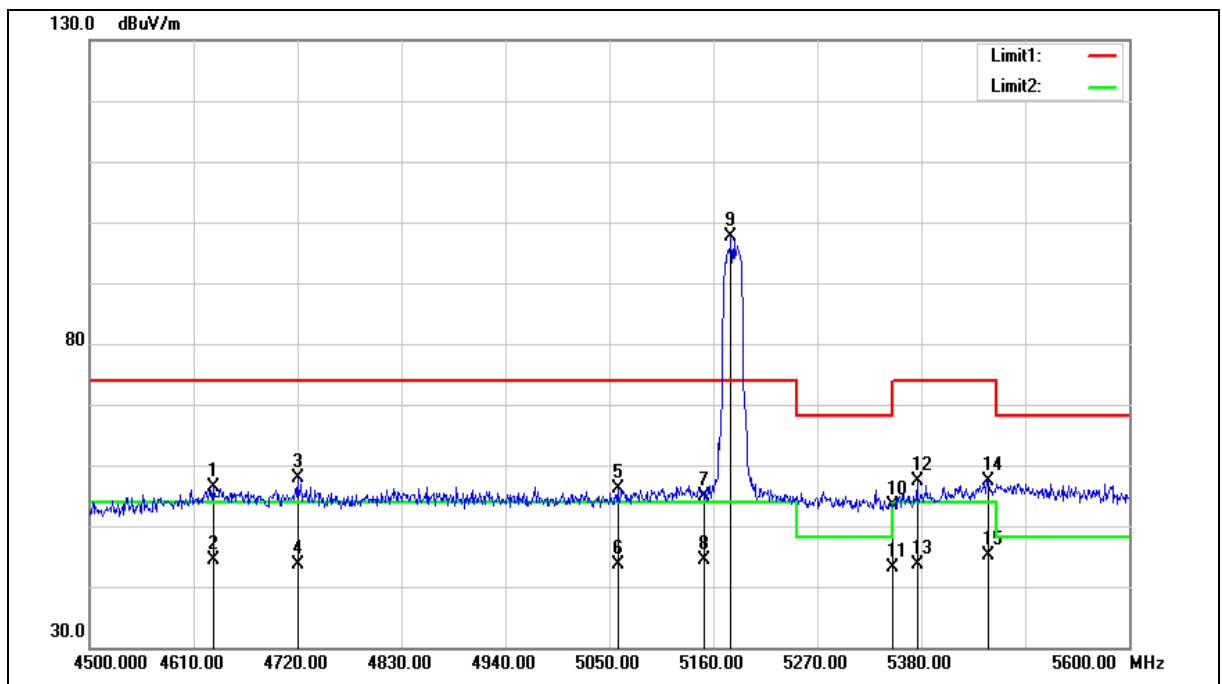

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5180 MHz	Temp.(°C)/Hum. (%RH):	26(°C)/60 %RH
Mode:	Mode 9		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4630.900	51.42	4.97	56.39	74.00	-17.61	peak
2	4630.900	39.30	4.97	44.27	54.00	-9.73	AVG
3	4720.000	52.61	5.16	57.77	74.00	-16.23	peak
4	4720.000	38.59	5.16	43.75	54.00	-10.25	AVG
5	5058.800	50.16	5.86	56.02	74.00	-17.98	peak
6	5058.800	37.69	5.86	43.55	54.00	-10.45	AVG
7	5150.000	48.78	6.07	54.85	74.00	-19.15	peak
8	5150.000	38.33	6.07	44.40	54.00	-9.60	AVG
9	5178.700	91.61	6.13	97.74	--	--	peak
10	5350.000	46.77	6.52	53.29	74.00	-20.71	peak
11	5350.000	36.64	6.52	43.16	54.00	-10.84	AVG
12	5375.600	50.91	6.58	57.49	74.00	-16.51	peak
13	5375.600	37.15	6.58	43.73	54.00	-10.27	AVG
14	5450.400	50.64	6.75	57.39	74.00	-16.61	peak
15	5450.400	38.26	6.75	45.01	54.00	-8.99	AVG

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5180 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 9		
Ant.Polar.:	Vertical		

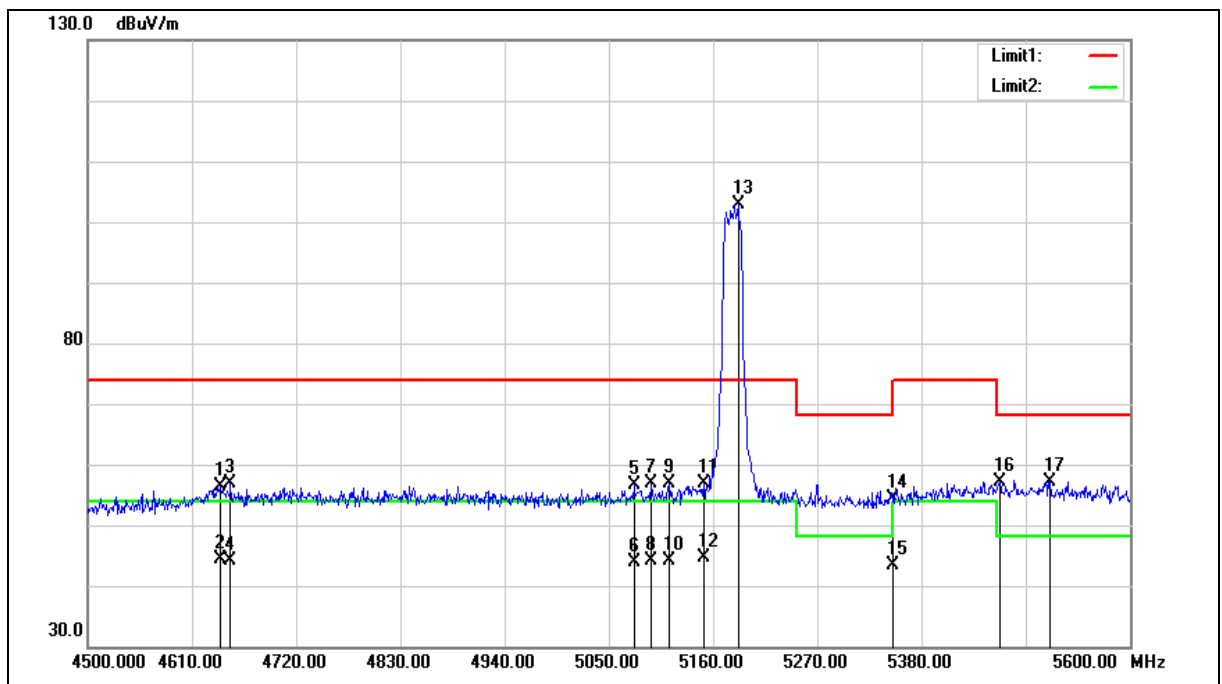

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5180 MHz	Temp.(°C)/Hum. (%RH):	26(°C)/60 %RH
Mode:	Mode 9		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4639.700	51.49	5.00	56.49	74.00	-17.51	peak
2	4639.700	39.46	5.00	44.46	54.00	-9.54	AVG
3	4650.700	51.88	5.01	56.89	74.00	-17.11	peak
4	4650.700	39.11	5.01	44.12	54.00	-9.88	AVG
5	5076.400	50.71	5.90	56.61	74.00	-17.39	peak
6	5076.400	37.87	5.90	43.77	54.00	-10.23	AVG
7	5094.000	50.87	5.95	56.82	74.00	-17.18	peak
8	5094.000	38.11	5.95	44.06	54.00	-9.94	AVG
9	5113.800	50.94	5.99	56.93	74.00	-17.07	peak
10	5113.800	38.23	5.99	44.22	54.00	-9.78	AVG
11	5150.000	50.89	6.07	56.96	74.00	-17.04	peak
12	5150.000	38.65	6.07	44.72	54.00	-9.28	AVG
13	5186.400	96.82	6.15	102.97	--	--	peak
14	5350.000	47.79	6.52	54.31	74.00	-19.69	peak
15	5350.000	36.75	6.52	43.27	54.00	-10.73	AVG
16	5462.500	50.44	6.78	57.22	68.20	-10.98	peak
17	5515.300	50.36	6.89	57.25	68.20	-10.95	peak

Note: 1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5320 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 9		
Ant.Polar.:	Horizontal		

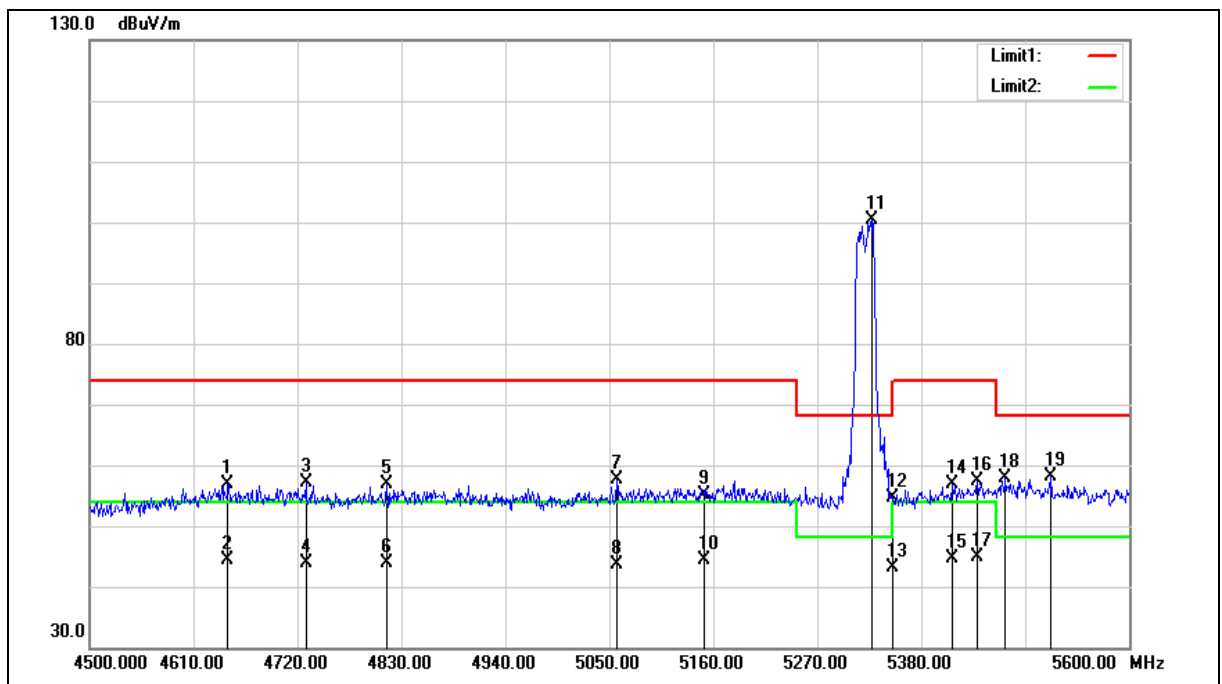

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5320 MHz	Temp.(°C)/Hum. (%RH):	26(°C)/60 %RH
Mode:	Mode 9		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4646.300	51.83	5.01	56.84	74.00	-17.16	peak
2	4646.300	39.34	5.01	44.35	54.00	-9.65	AVG
3	4728.800	51.90	5.18	57.08	74.00	-16.92	peak
4	4728.800	38.64	5.18	43.82	54.00	-10.18	AVG
5	4814.600	51.54	5.35	56.89	74.00	-17.11	peak
6	4814.600	38.55	5.35	43.90	54.00	-10.10	AVG
7	5057.700	51.81	5.85	57.66	74.00	-16.34	peak
8	5057.700	37.73	5.85	43.58	54.00	-10.42	AVG
9	5150.000	49.02	6.07	55.09	74.00	-18.91	peak
10	5150.000	38.43	6.07	44.50	54.00	-9.50	AVG
11	5328.300	93.87	6.47	100.34	--	--	peak
12	5350.000	48.23	6.52	54.75	74.00	-19.25	peak
13	5350.000	36.67	6.52	43.19	54.00	-10.81	AVG
14	5413.000	50.24	6.66	56.90	74.00	-17.10	peak
15	5413.000	37.89	6.66	44.55	54.00	-9.45	AVG
16	5439.400	50.64	6.73	57.37	74.00	-16.63	peak
17	5439.400	38.16	6.73	44.89	54.00	-9.11	AVG
18	5469.100	50.98	6.79	57.77	68.20	-10.43	peak
19	5517.500	51.14	6.90	58.04	68.20	-10.16	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5320 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 9		
Ant.Polar.:	Vertical		

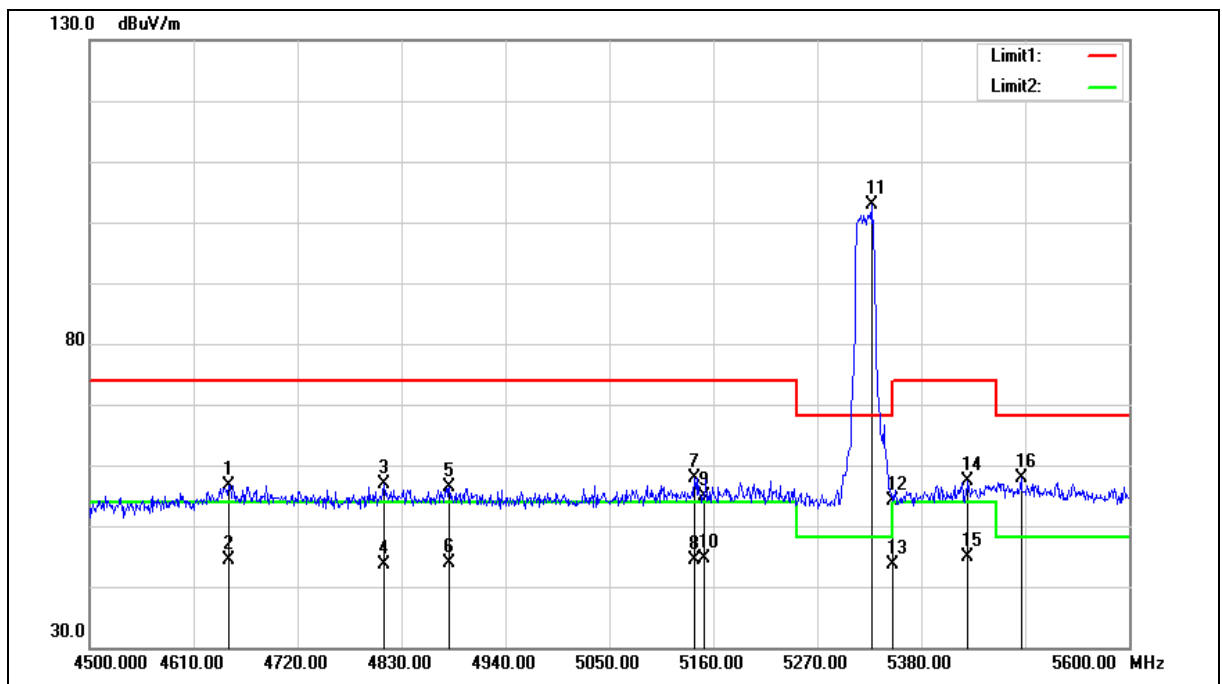

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5320 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 9		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4647.400	51.66	5.01	56.67	74.00	-17.33	peak
2	4647.400	39.29	5.01	44.30	54.00	-9.70	AVG
3	4811.300	51.44	5.34	56.78	74.00	-17.22	peak
4	4811.300	38.36	5.34	43.70	54.00	-10.30	AVG
5	4880.600	50.86	5.48	56.34	74.00	-17.66	peak
6	4880.600	38.31	5.48	43.79	54.00	-10.21	AVG
7	5140.200	51.93	6.05	57.98	74.00	-16.02	peak
8	5140.200	38.40	6.05	44.45	54.00	-9.55	AVG
9	5150.000	48.91	6.07	54.98	74.00	-19.02	peak
10	5150.000	38.44	6.07	44.51	54.00	-9.49	AVG
11	5327.200	96.38	6.47	102.85	--	--	peak
12	5350.000	47.66	6.52	54.18	74.00	-19.82	peak
13	5350.000	37.22	6.52	43.74	54.00	-10.26	AVG
14	5429.500	50.59	6.70	57.29	74.00	-16.71	peak
15	5429.500	38.12	6.70	44.82	54.00	-9.18	AVG
16	5485.600	51.04	6.82	57.86	68.20	-10.34	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5500 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 9		
Ant.Polar.:	Horizontal		

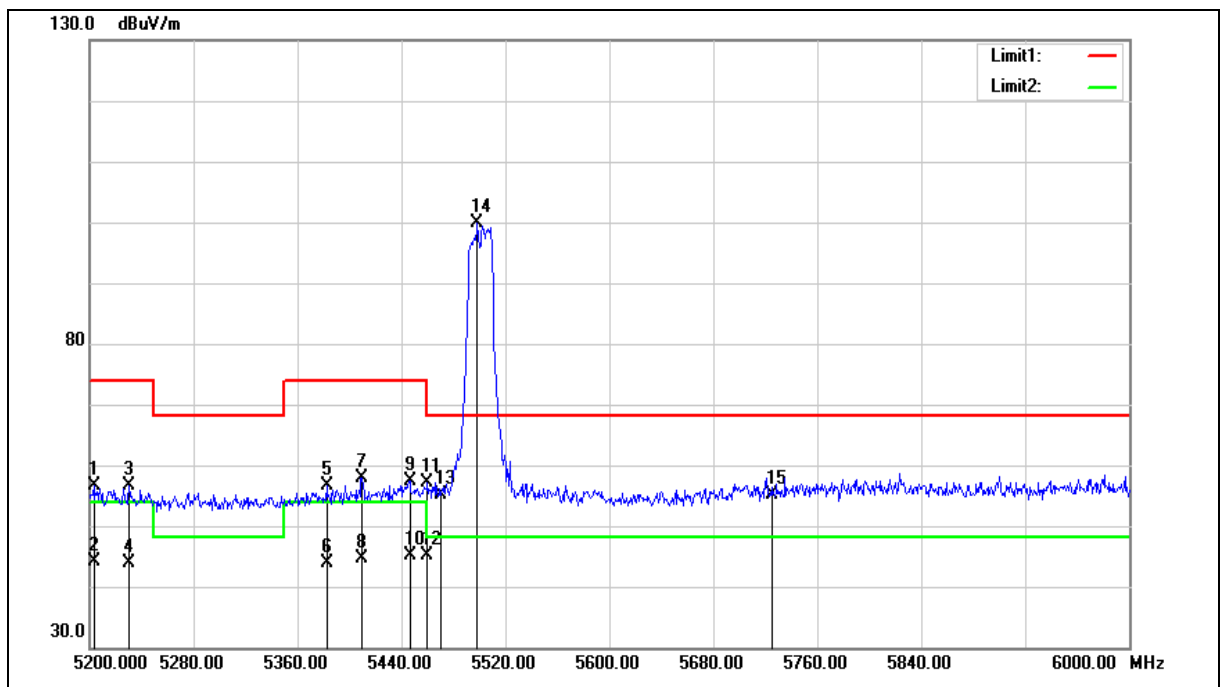

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5500 MHz	Temp.(°C)/Hum. (%RH):	26(°C)/60 %RH
Mode:	Mode 9		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5203.200	50.38	6.19	56.57	74.00	-17.43	peak
2	5203.200	38.00	6.19	44.19	54.00	-9.81	AVG
3	5230.400	50.46	6.24	56.70	74.00	-17.30	peak
4	5230.400	37.52	6.24	43.76	54.00	-10.24	AVG
5	5382.400	49.94	6.59	56.53	74.00	-17.47	peak
6	5382.400	37.32	6.59	43.91	54.00	-10.09	AVG
7	5409.600	51.33	6.65	57.98	74.00	-16.02	peak
8	5409.600	37.86	6.65	44.51	54.00	-9.49	AVG
9	5446.400	50.72	6.74	57.46	74.00	-16.54	peak
10	5446.400	38.33	6.74	45.07	54.00	-8.93	AVG
11	5460.000	50.28	6.77	57.05	74.00	-16.95	peak
12	5460.000	38.27	6.77	45.04	54.00	-8.96	AVG
13	5470.000	48.23	6.80	55.03	68.20	-13.17	peak
14	5498.400	92.92	6.86	99.78	--	--	peak
15	5725.000	47.69	7.32	55.01	68.20	-13.19	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5500 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 9		
Ant.Polar.:	Vertical		

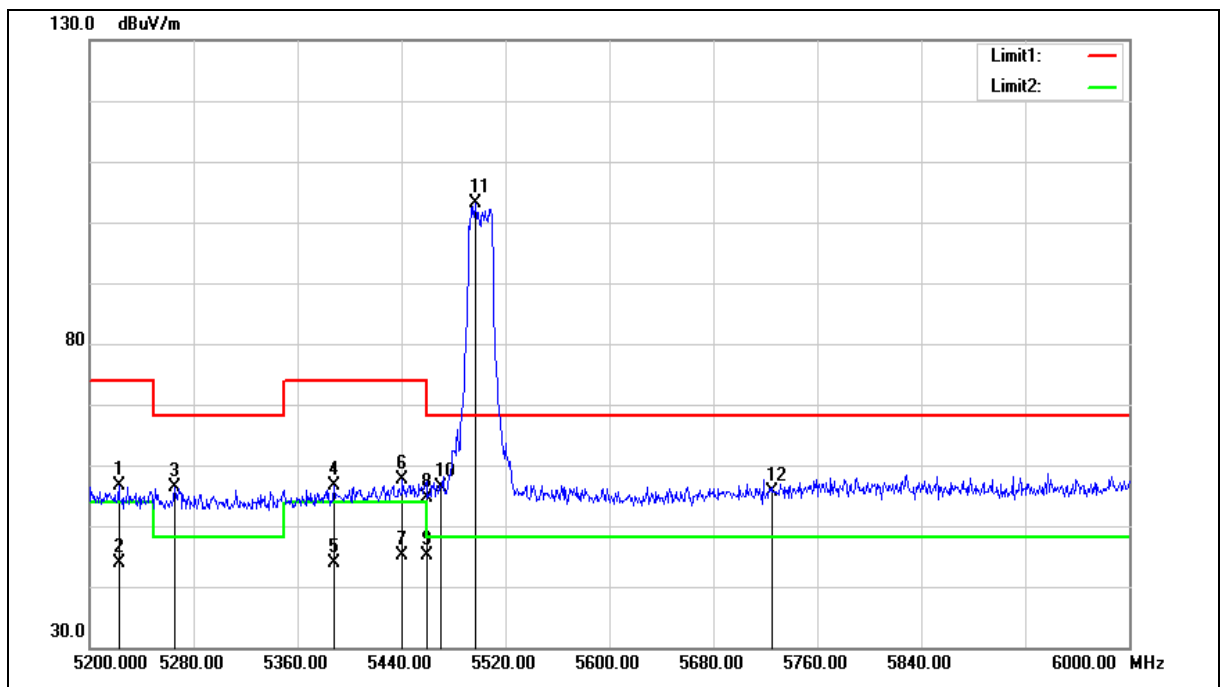

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5500 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 9		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5222.400	50.42	6.23	56.65	74.00	-17.35	peak
2	5222.400	37.73	6.23	43.96	54.00	-10.04	AVG
3	5265.600	49.92	6.34	56.26	68.20	-11.94	peak
4	5388.000	49.96	6.61	56.57	74.00	-17.43	peak
5	5388.000	37.37	6.61	43.98	54.00	-10.02	AVG
6	5440.800	50.79	6.73	57.52	74.00	-16.48	peak
7	5440.800	38.34	6.73	45.07	54.00	-8.93	AVG
8	5460.000	47.85	6.77	54.62	74.00	-19.38	peak
9	5460.000	38.46	6.77	45.23	54.00	-8.77	AVG
10	5470.000	49.50	6.80	56.30	68.20	-11.90	peak
11	5496.800	96.22	6.85	103.07	--	--	peak
12	5725.000	48.31	7.32	55.63	68.20	-12.57	peak

Note: 1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5700 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 9		
Ant.Polar.:	Horizontal		

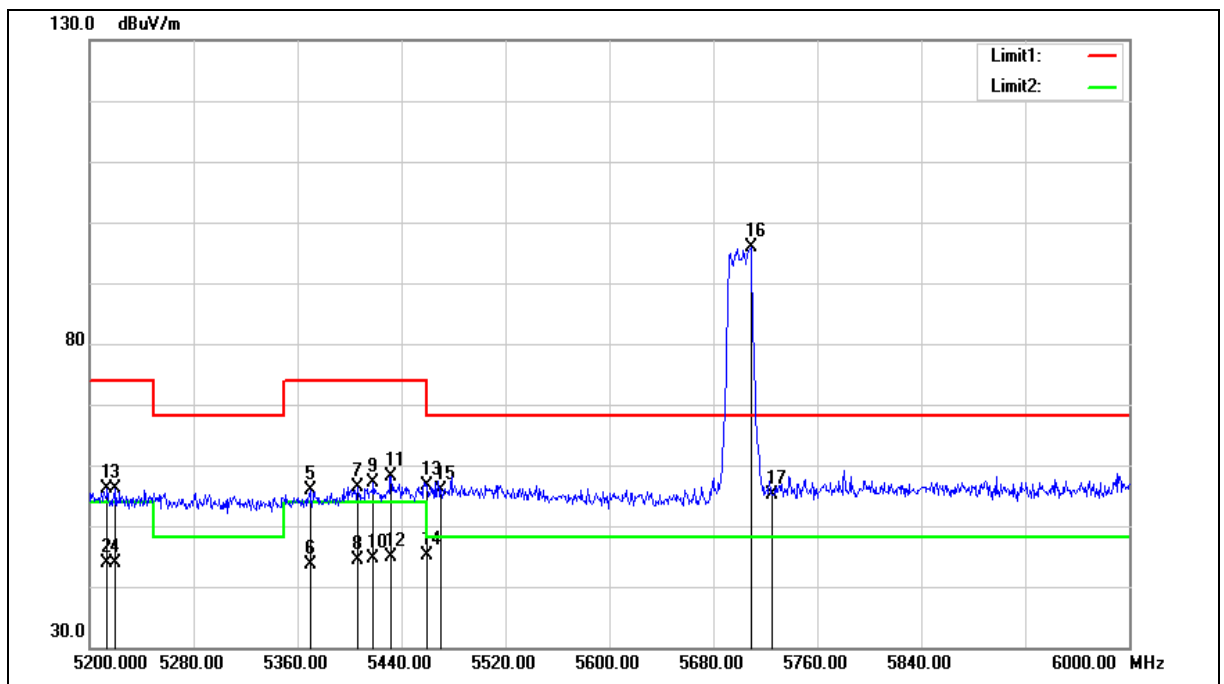

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5700 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 9		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5213.600	49.80	6.21	56.01	74.00	-17.99	peak
2	5213.600	37.74	6.21	43.95	54.00	-10.05	AVG
3	5220.000	49.84	6.23	56.07	74.00	-17.93	peak
4	5220.000	37.74	6.23	43.97	54.00	-10.03	AVG
5	5369.600	49.23	6.57	55.80	74.00	-18.20	peak
6	5369.600	37.06	6.57	43.63	54.00	-10.37	AVG
7	5406.400	49.76	6.64	56.40	74.00	-17.60	peak
8	5406.400	37.81	6.64	44.45	54.00	-9.55	AVG
9	5418.400	50.42	6.68	57.10	74.00	-16.90	peak
10	5418.400	37.92	6.68	44.60	54.00	-9.40	AVG
11	5432.000	51.45	6.71	58.16	74.00	-15.84	peak
12	5432.000	38.10	6.71	44.81	54.00	-9.19	AVG
13	5460.000	49.94	6.77	56.71	74.00	-17.29	peak
14	5460.000	38.30	6.77	45.07	54.00	-8.93	AVG
15	5470.000	49.18	6.80	55.98	68.20	-12.22	peak
16	5708.800	88.61	7.29	95.90	--	--	peak
17	5725.000	47.84	7.32	55.16	68.20	-13.04	peak

Note: 1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5700 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 9		
Ant.Polar.:	Vertical		

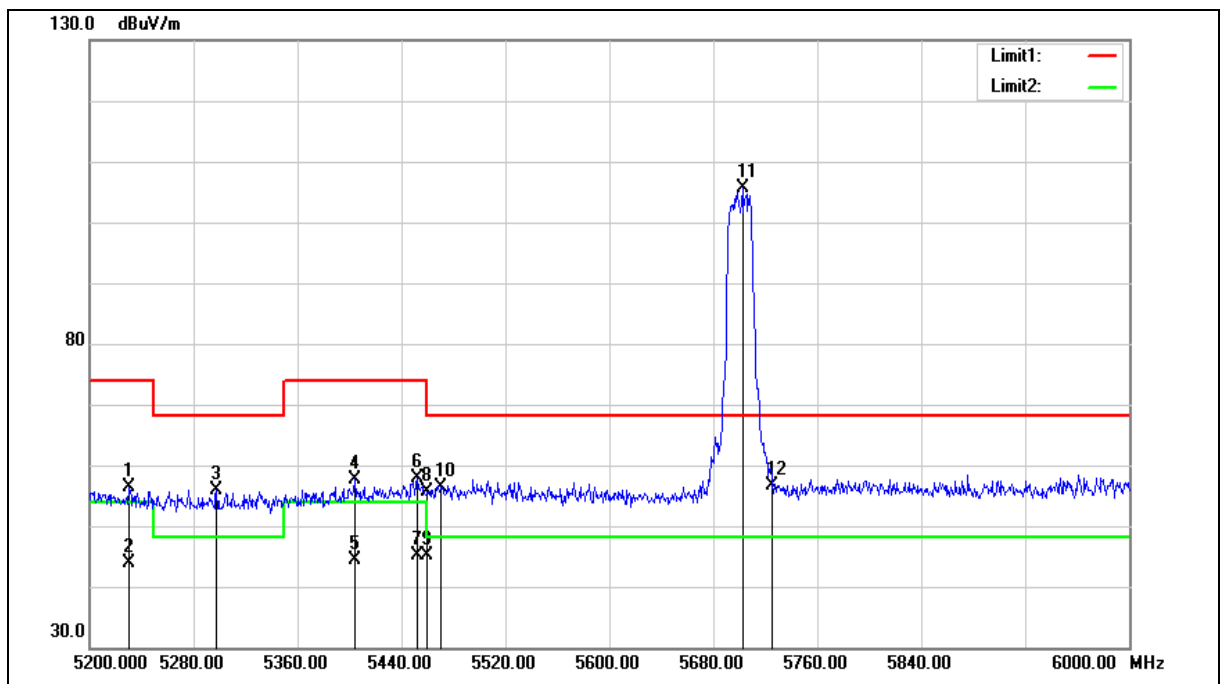

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5700 MHz	Temp.(°C)/Hum. (%RH):	26(°C)/60 %RH
Mode:	Mode 9		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5230.400	50.05	6.24	56.29	74.00	-17.71	peak
2	5230.400	37.59	6.24	43.83	54.00	-10.17	AVG
3	5297.600	49.38	6.41	55.79	68.20	-12.41	peak
4	5404.000	51.11	6.64	57.75	74.00	-16.25	peak
5	5404.000	37.77	6.64	44.41	54.00	-9.59	AVG
6	5452.000	51.23	6.75	57.98	74.00	-16.02	peak
7	5452.000	38.32	6.75	45.07	54.00	-8.93	AVG
8	5460.000	48.93	6.77	55.70	74.00	-18.30	peak
9	5460.000	38.30	6.77	45.07	54.00	-8.93	AVG
10	5470.000	49.53	6.80	56.33	68.20	-11.87	peak
11	5702.400	98.24	7.28	105.52	--	--	peak
12	5725.000	49.30	7.32	56.62	68.20	-11.58	peak

Note: 1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5745 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 9		
Ant.Polar.:	Horizontal		

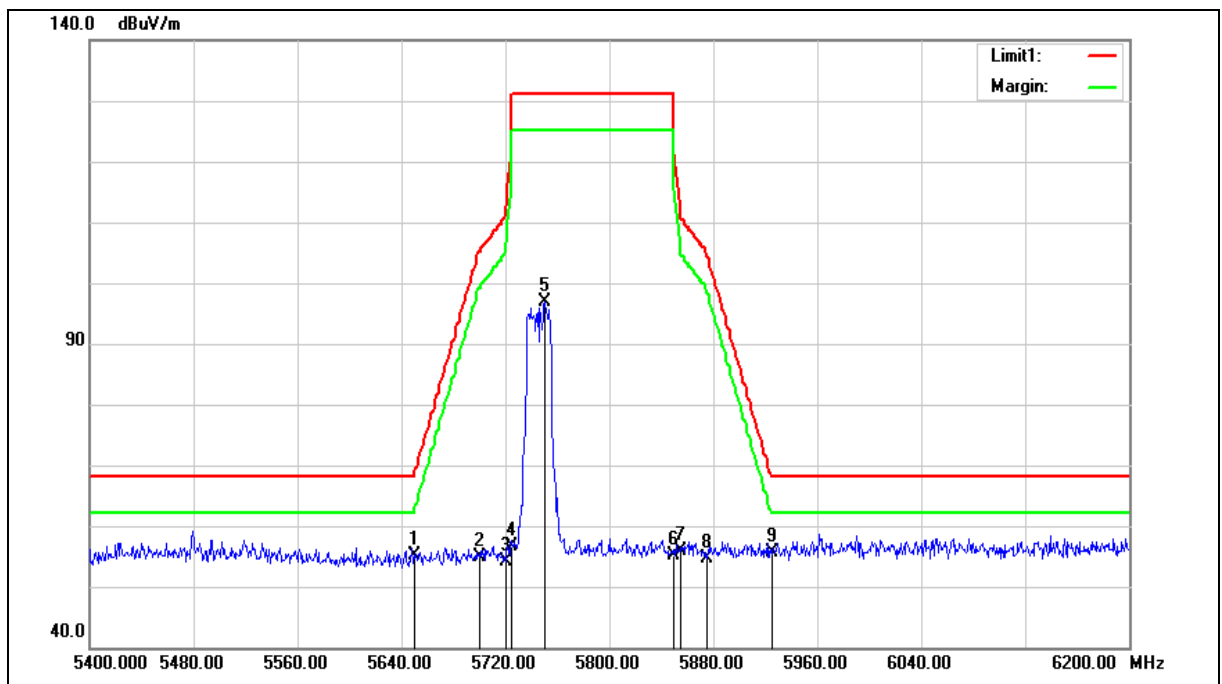

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5745 MHz	Temp.(°C)/Hum. (%RH):	26(°C)/60 %RH
Mode:	Mode 9		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5650.000	47.99	7.17	55.16	68.20	-13.04	peak
2	5700.000	47.58	7.27	54.85	105.20	-50.35	peak
3	5720.000	46.88	7.31	54.19	110.80	-56.61	peak
4	5725.000	49.35	7.32	56.67	122.20	-65.53	peak
5	5750.400	89.37	7.39	96.76	--	--	peak
6	5850.000	47.58	7.59	55.17	122.20	-67.03	peak
7	5855.000	48.21	7.60	55.81	110.80	-54.99	peak
8	5875.000	47.01	7.64	54.65	105.20	-50.55	peak
9	5925.000	47.96	7.75	55.71	68.20	-12.49	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5745 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 9		
Ant.Polar.:	Vertical		

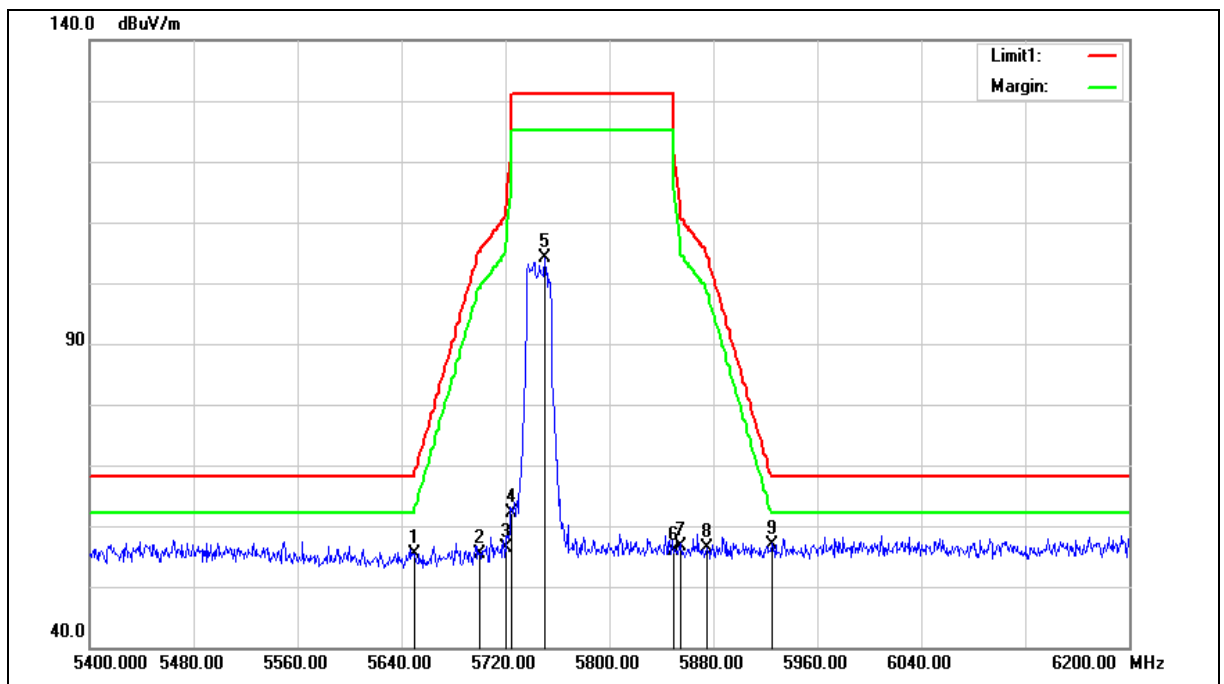

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5745 MHz	Temp.(°C)/Hum. (%RH):	26(°C)/60 %RH
Mode:	Mode 9		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5650.000	48.20	7.17	55.37	68.20	-12.83	peak
2	5700.000	48.03	7.27	55.30	105.20	-49.90	peak
3	5720.000	49.01	7.31	56.32	110.80	-54.48	peak
4	5725.000	54.72	7.32	62.04	122.20	-60.16	peak
5	5750.400	96.83	7.39	104.22	--	--	peak
6	5850.000	48.41	7.59	56.00	122.20	-66.20	peak
7	5855.000	49.09	7.60	56.69	110.80	-54.11	peak
8	5875.000	48.70	7.64	56.34	105.20	-48.86	peak
9	5925.000	49.11	7.75	56.86	68.20	-11.34	peak

Note: 1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5825 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 9		
Ant.Polar.:	Horizontal		

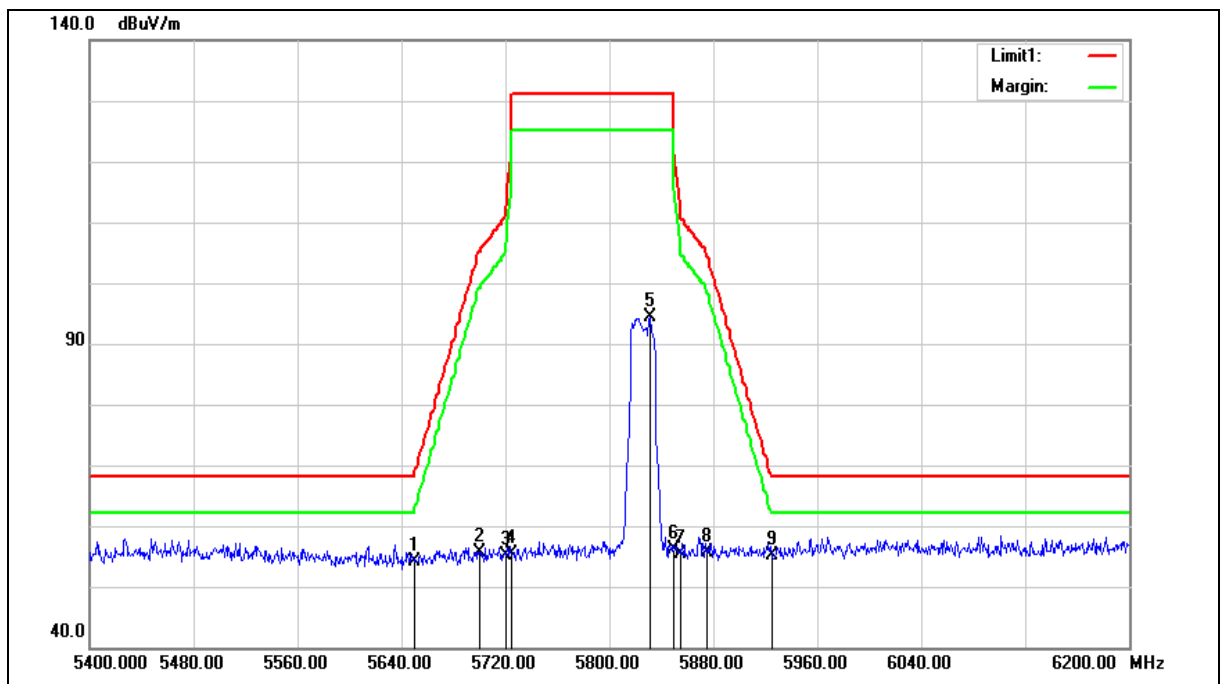

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5825 MHz	Temp.(°C)/Hum. (%RH):	26(°C)/60 %RH
Mode:	Mode 9		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5650.000	46.85	7.17	54.02	68.20	-14.18	peak
2	5700.000	48.38	7.27	55.65	105.20	-49.55	peak
3	5720.000	47.73	7.31	55.04	110.80	-55.76	peak
4	5725.000	48.03	7.32	55.35	122.20	-66.85	peak
5	5831.200	86.94	7.55	94.49	--	--	peak
6	5850.000	48.54	7.59	56.13	122.20	-66.07	peak
7	5855.000	47.82	7.60	55.42	110.80	-55.38	peak
8	5875.000	47.89	7.64	55.53	105.20	-49.67	peak
9	5925.000	47.37	7.75	55.12	68.20	-13.08	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5825 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 9		
Ant.Polar.:	Vertical		

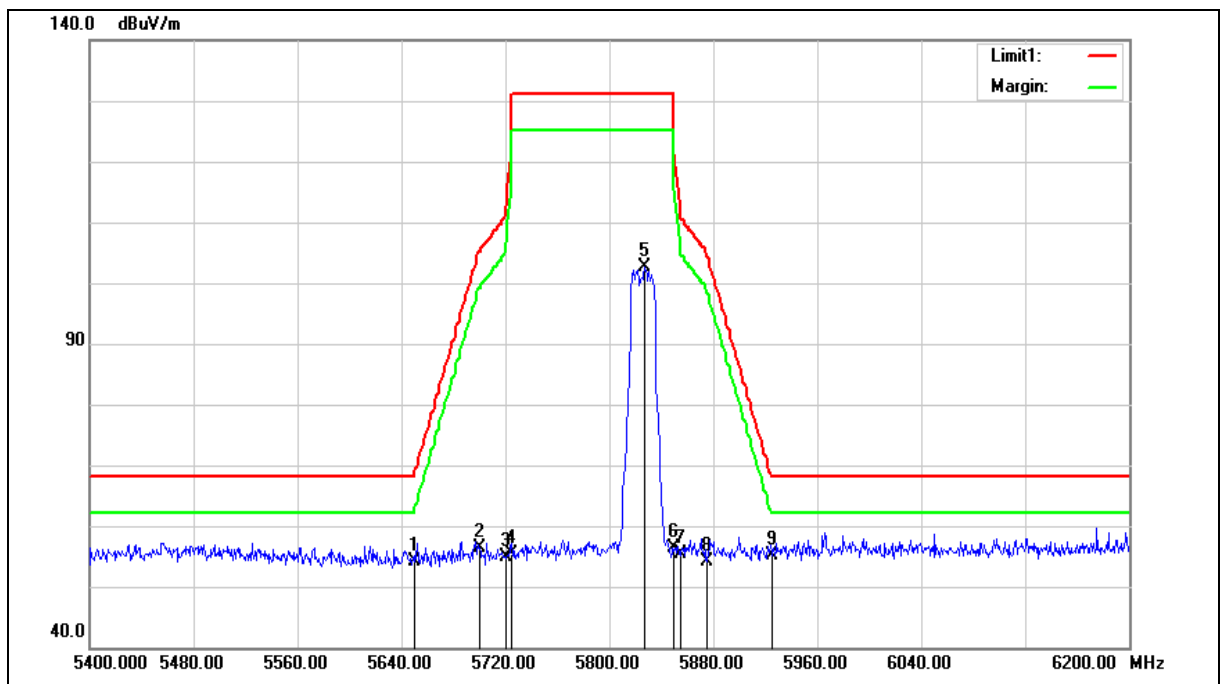

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5825 MHz	Temp.(°C)/Hum. (%RH):	26(°C)/60 %RH
Mode:	Mode 9		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5650.000	46.86	7.17	54.03	68.20	-14.17	peak
2	5700.000	49.21	7.27	56.48	105.20	-48.72	peak
3	5720.000	47.61	7.31	54.92	110.80	-55.88	peak
4	5725.000	48.06	7.32	55.38	122.20	-66.82	peak
5	5827.200	95.15	7.54	102.69	--	--	peak
6	5850.000	48.90	7.59	56.49	122.20	-65.71	peak
7	5855.000	47.81	7.60	55.41	110.80	-55.39	peak
8	5875.000	46.53	7.64	54.17	105.20	-51.03	peak
9	5925.000	47.44	7.75	55.19	68.20	-13.01	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5190 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 10		
Ant.Polar.:	Horizontal		

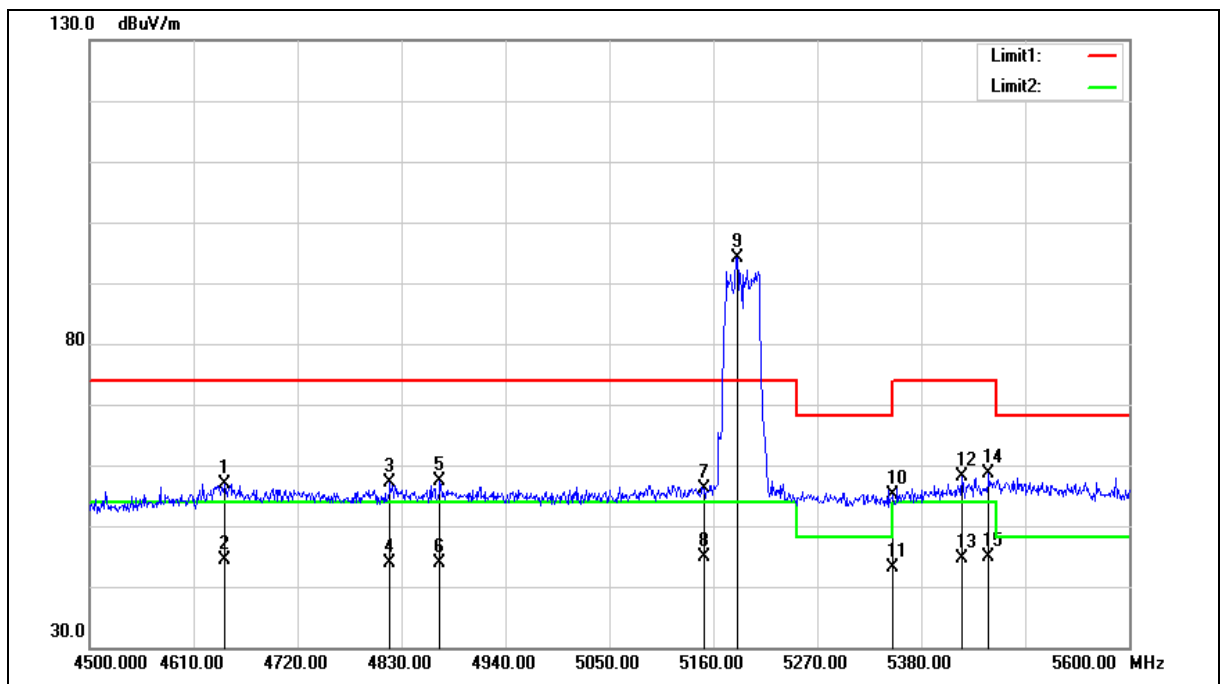

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5190 MHz	Temp.(°C)/Hum. (%RH):	26(°C)/60 %RH
Mode:	Mode 10		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4643.000	51.89	5.01	56.90	74.00	-17.10	peak
2	4643.000	39.45	5.01	44.46	54.00	-9.54	AVG
3	4817.900	51.69	5.36	57.05	74.00	-16.95	peak
4	4817.900	38.54	5.36	43.90	54.00	-10.10	AVG
5	4870.700	51.95	5.46	57.41	74.00	-16.59	peak
6	4870.700	38.36	5.46	43.82	54.00	-10.18	AVG
7	5150.000	49.99	6.07	56.06	74.00	-17.94	peak
8	5150.000	38.69	6.07	44.76	54.00	-9.24	AVG
9	5185.300	87.94	6.14	94.08	--	--	peak
10	5350.000	48.53	6.52	55.05	74.00	-18.95	peak
11	5350.000	36.51	6.52	43.03	54.00	-10.97	AVG
12	5422.900	51.37	6.69	58.06	74.00	-15.94	peak
13	5422.900	37.92	6.69	44.61	54.00	-9.39	AVG
14	5451.500	51.81	6.75	58.56	74.00	-15.44	peak
15	5451.500	38.24	6.75	44.99	54.00	-9.01	AVG

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5190 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 10		
Ant.Polar.:	Vertical		

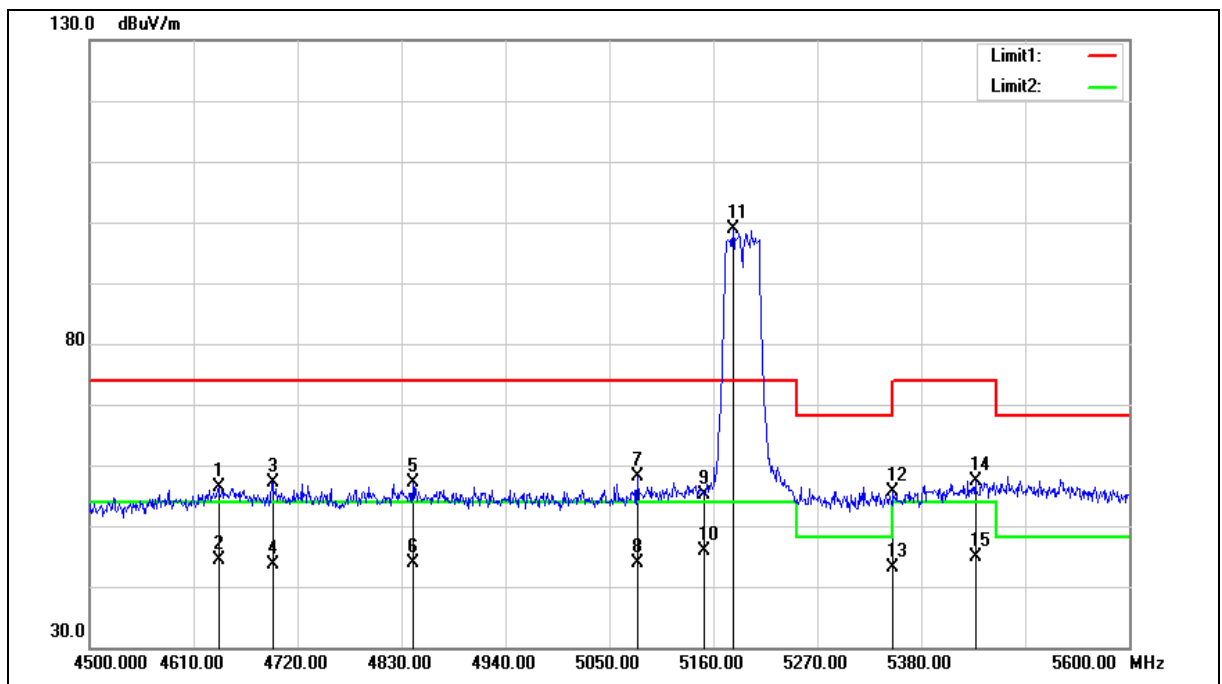

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5190 MHz	Temp.(°C)/Hum. (%RH):	26(°C)/60 %RH
Mode:	Mode 10		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4636.400	51.47	4.99	56.46	74.00	-17.54	peak
2	4636.400	39.36	4.99	44.35	54.00	-9.65	AVG
3	4693.600	52.11	5.10	57.21	74.00	-16.79	peak
4	4693.600	38.55	5.10	43.65	54.00	-10.35	AVG
5	4842.100	51.69	5.41	57.10	74.00	-16.90	peak
6	4842.100	38.43	5.41	43.84	54.00	-10.16	AVG
7	5079.700	52.11	5.90	58.01	74.00	-15.99	peak
8	5079.700	37.93	5.90	43.83	54.00	-10.17	AVG
9	5150.000	49.12	6.07	55.19	74.00	-18.81	peak
10	5150.000	39.87	6.07	45.94	54.00	-8.06	AVG
11	5180.900	92.80	6.14	98.94	--	--	peak
12	5350.000	49.10	6.52	55.62	74.00	-18.38	peak
13	5350.000	36.60	6.52	43.12	54.00	-10.88	AVG
14	5437.200	50.70	6.72	57.42	74.00	-16.58	peak
15	5437.200	38.14	6.72	44.86	54.00	-9.14	AVG

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5310 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 10		
Ant.Polar.:	Horizontal		

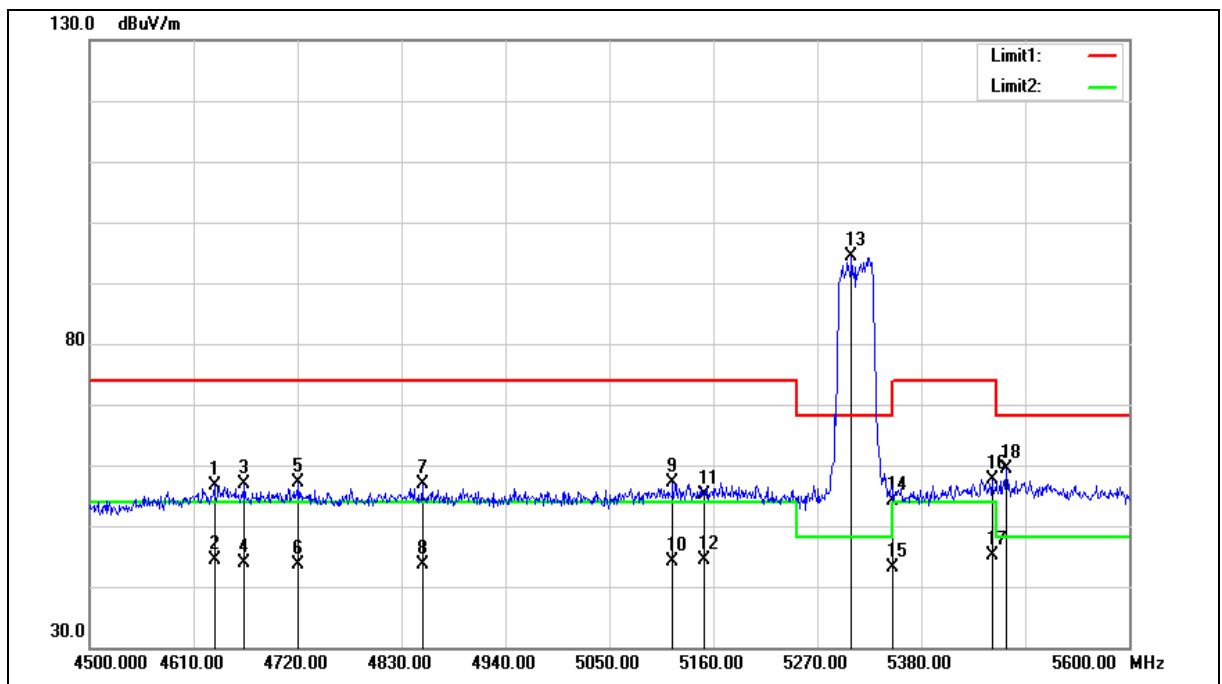

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5310 MHz	Temp.(°C)/Hum. (%RH):	26(°C)/60 %RH
Mode:	Mode 10		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4632.000	51.65	4.97	56.62	74.00	-17.38	peak
2	4632.000	39.32	4.97	44.29	54.00	-9.71	AVG
3	4663.900	51.77	5.04	56.81	74.00	-17.19	peak
4	4663.900	38.74	5.04	43.78	54.00	-10.22	AVG
5	4721.100	51.94	5.16	57.10	74.00	-16.90	peak
6	4721.100	38.54	5.16	43.70	54.00	-10.30	AVG
7	4852.000	51.49	5.42	56.91	74.00	-17.09	peak
8	4852.000	38.30	5.42	43.72	54.00	-10.28	AVG
9	5117.100	51.16	6.00	57.16	74.00	-16.84	peak
10	5117.100	38.12	6.00	44.12	54.00	-9.88	AVG
11	5150.000	49.15	6.07	55.22	74.00	-18.78	peak
12	5150.000	38.39	6.07	44.46	54.00	-9.54	AVG
13	5306.300	88.05	6.42	94.47	--	--	peak
14	5350.000	47.56	6.52	54.08	74.00	-19.92	peak
15	5350.000	36.71	6.52	43.23	54.00	-10.77	AVG
16	5454.800	50.83	6.76	57.59	74.00	-16.41	peak
17	5454.800	38.25	6.76	45.01	54.00	-8.99	AVG
18	5470.200	52.54	6.80	59.34	68.20	-8.86	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5310 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 10		
Ant.Polar.:	Vertical		

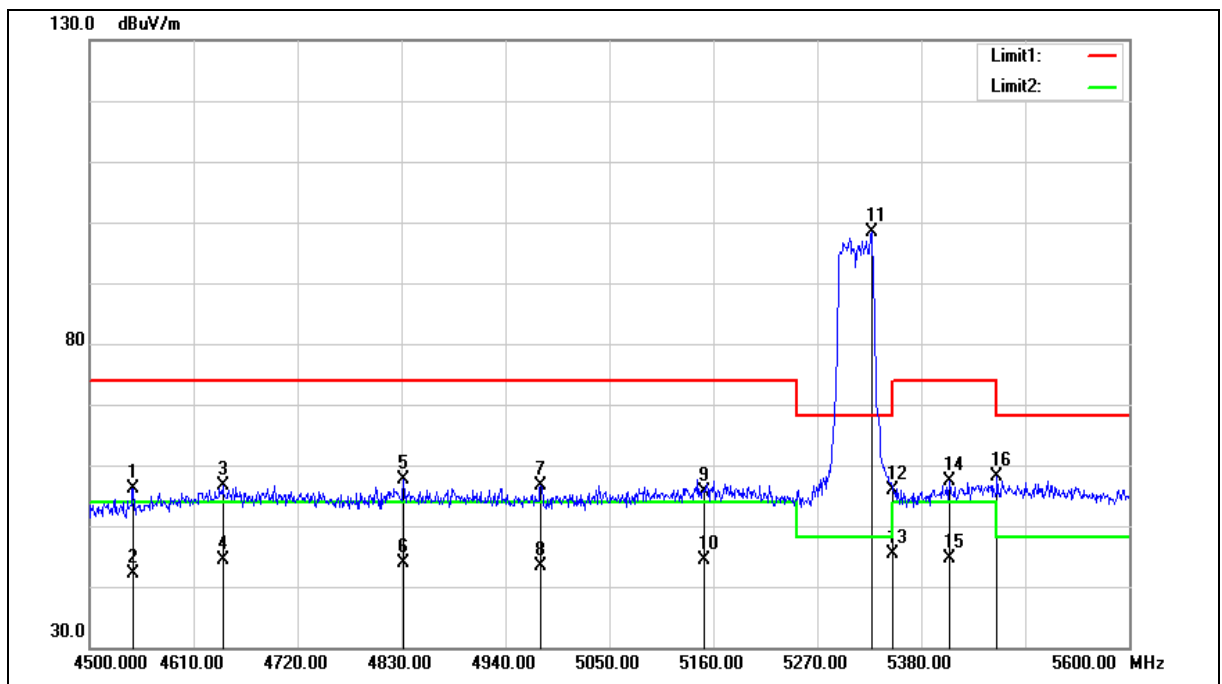

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5310 MHz	Temp.(°C)/Hum. (%RH):	26(°C)/60 %RH
Mode:	Mode 10		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4546.200	51.42	4.80	56.22	74.00	-17.78	peak
2	4546.200	37.31	4.80	42.11	54.00	-11.89	AVG
3	4640.800	51.68	5.00	56.68	74.00	-17.32	peak
4	4640.800	39.41	5.00	44.41	54.00	-9.59	AVG
5	4832.200	52.23	5.38	57.61	74.00	-16.39	peak
6	4832.200	38.51	5.38	43.89	54.00	-10.11	AVG
7	4977.400	51.01	5.68	56.69	74.00	-17.31	peak
8	4977.400	37.65	5.68	43.33	54.00	-10.67	AVG
9	5150.000	49.57	6.07	55.64	74.00	-18.36	peak
10	5150.000	38.43	6.07	44.50	54.00	-9.50	AVG
11	5327.200	91.86	6.47	98.33	--	--	peak
12	5350.000	49.41	6.52	55.93	74.00	-18.07	peak
13	5350.000	38.84	6.52	45.36	54.00	-8.64	AVG
14	5409.700	50.61	6.65	57.26	74.00	-16.74	peak
15	5409.700	38.08	6.65	44.73	54.00	-9.27	AVG
16	5460.300	51.25	6.77	58.02	68.20	-10.18	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5510 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 10		
Ant.Polar.:	Horizontal		

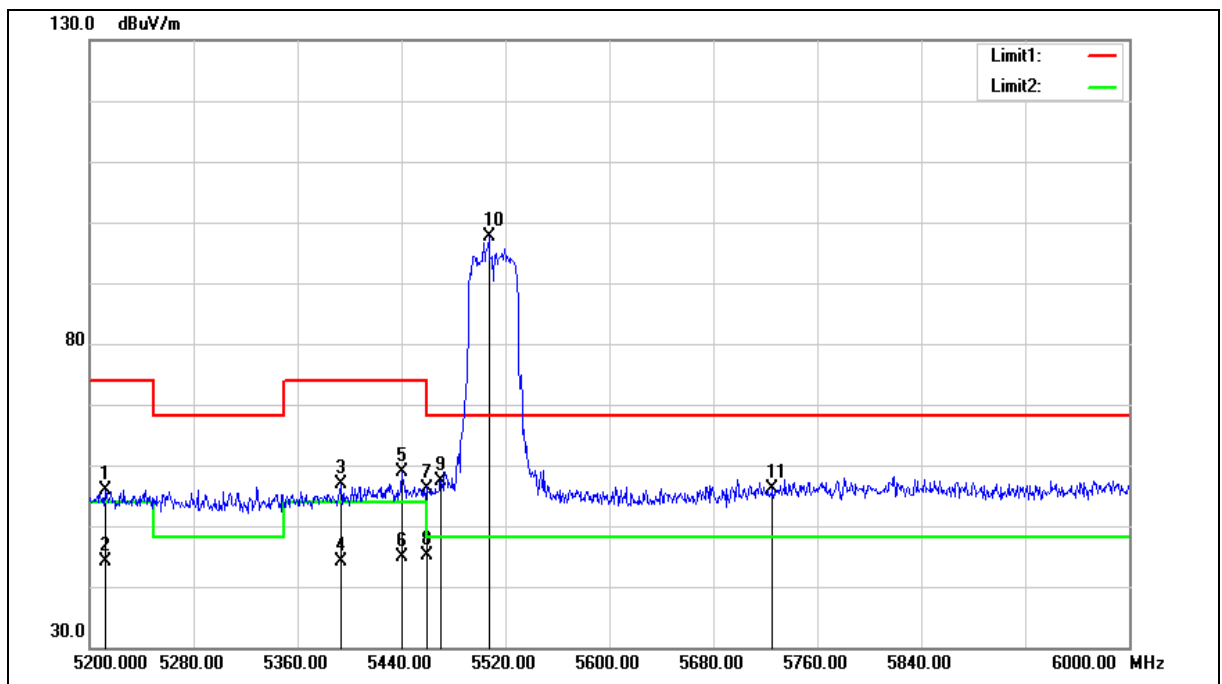

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5510 MHz	Temp.(°C)/Hum. (%RH):	26(°C)/60 %RH
Mode:	Mode 10		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5212.000	49.75	6.20	55.95	74.00	-18.05	peak
2	5212.000	37.85	6.20	44.05	54.00	-9.95	AVG
3	5393.600	50.16	6.62	56.78	74.00	-17.22	peak
4	5393.600	37.48	6.62	44.10	54.00	-9.90	AVG
5	5440.000	52.08	6.73	58.81	74.00	-15.19	peak
6	5440.000	38.20	6.73	44.93	54.00	-9.07	AVG
7	5460.000	49.41	6.77	56.18	74.00	-17.82	peak
8	5460.000	38.39	6.77	45.16	54.00	-8.84	AVG
9	5470.000	50.58	6.80	57.38	68.20	-10.82	peak
10	5507.200	90.71	6.87	97.58	--	--	peak
11	5725.000	48.88	7.32	56.20	68.20	-12.00	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5510 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 10		
Ant.Polar.:	Vertical		

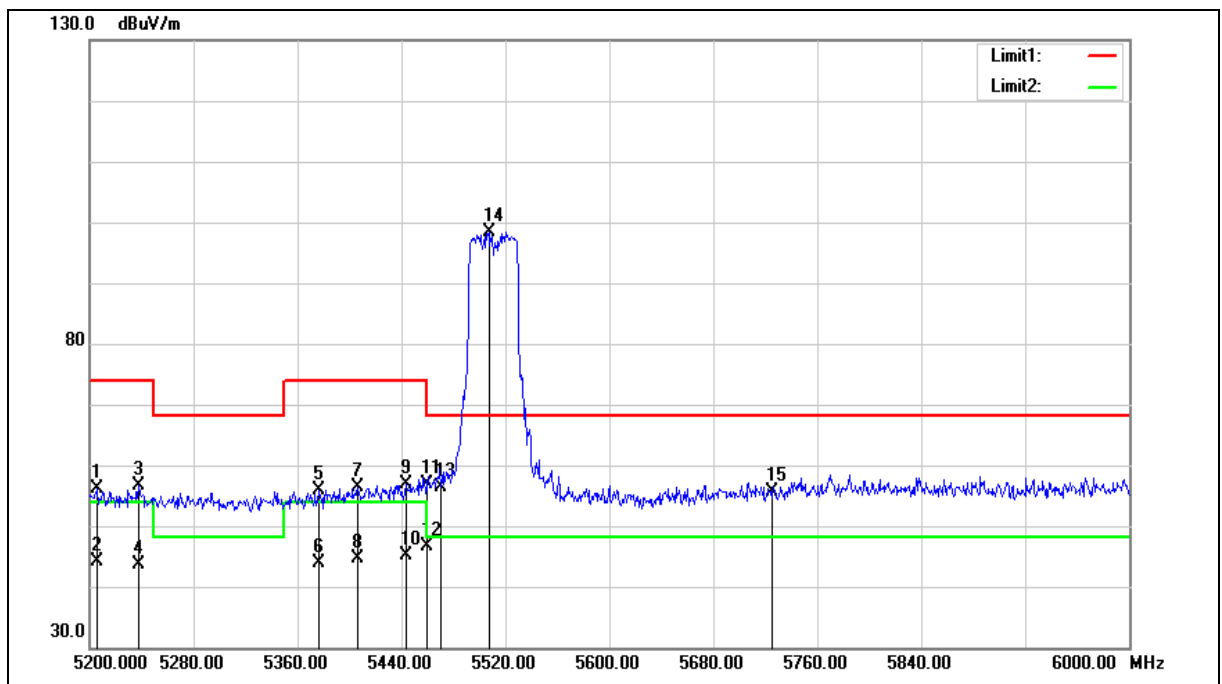

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5510 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 10		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5205.600	49.97	6.19	56.16	74.00	-17.84	peak
2	5205.600	37.99	6.19	44.18	54.00	-9.82	AVG
3	5237.600	50.26	6.27	56.53	74.00	-17.47	peak
4	5237.600	37.45	6.27	43.72	54.00	-10.28	AVG
5	5376.000	49.41	6.58	55.99	74.00	-18.01	peak
6	5376.000	37.18	6.58	43.76	54.00	-10.24	AVG
7	5406.400	49.64	6.64	56.28	74.00	-17.72	peak
8	5406.400	37.87	6.64	44.51	54.00	-9.49	AVG
9	5444.000	50.13	6.74	56.87	74.00	-17.13	peak
10	5444.000	38.32	6.74	45.06	54.00	-8.94	AVG
11	5460.000	50.15	6.77	56.92	74.00	-17.08	peak
12	5460.000	39.80	6.77	46.57	54.00	-7.43	AVG
13	5470.000	49.65	6.80	56.45	68.20	-11.75	peak
14	5507.200	91.48	6.87	98.35	--	--	peak
15	5725.000	48.41	7.32	55.73	68.20	-12.47	peak

Note: 1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5670 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 10		
Ant.Polar.:	Horizontal		

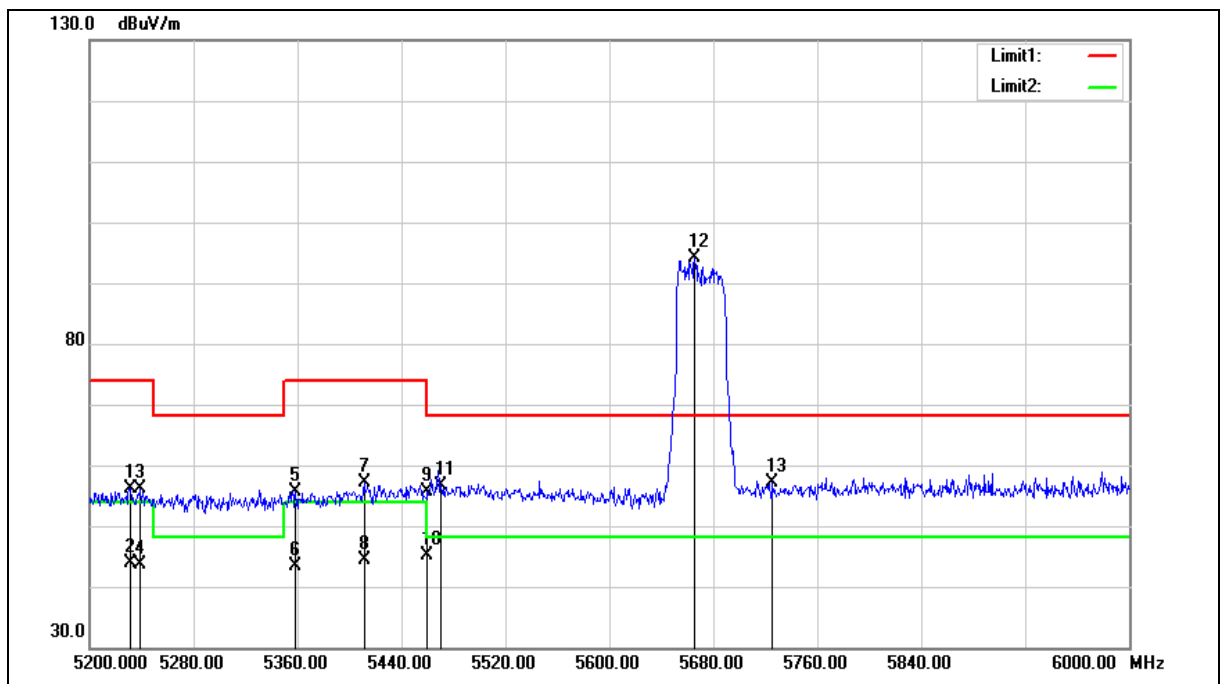

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5670 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 10		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5231.200	49.98	6.25	56.23	74.00	-17.77	peak
2	5231.200	37.57	6.25	43.82	54.00	-10.18	AVG
3	5239.200	49.89	6.27	56.16	74.00	-17.84	peak
4	5239.200	37.34	6.27	43.61	54.00	-10.39	AVG
5	5358.400	49.14	6.54	55.68	74.00	-18.32	peak
6	5358.400	36.83	6.54	43.37	54.00	-10.63	AVG
7	5411.200	50.38	6.65	57.03	74.00	-16.97	peak
8	5411.200	37.79	6.65	44.44	54.00	-9.56	AVG
9	5460.000	48.74	6.77	55.51	74.00	-18.49	peak
10	5460.000	38.37	6.77	45.14	54.00	-8.86	AVG
11	5470.000	49.78	6.80	56.58	68.20	-11.62	peak
12	5665.600	86.86	7.20	94.06	--	--	peak
13	5725.000	49.77	7.32	57.09	68.20	-11.11	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5670 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 10		
Ant.Polar.:	Vertical		

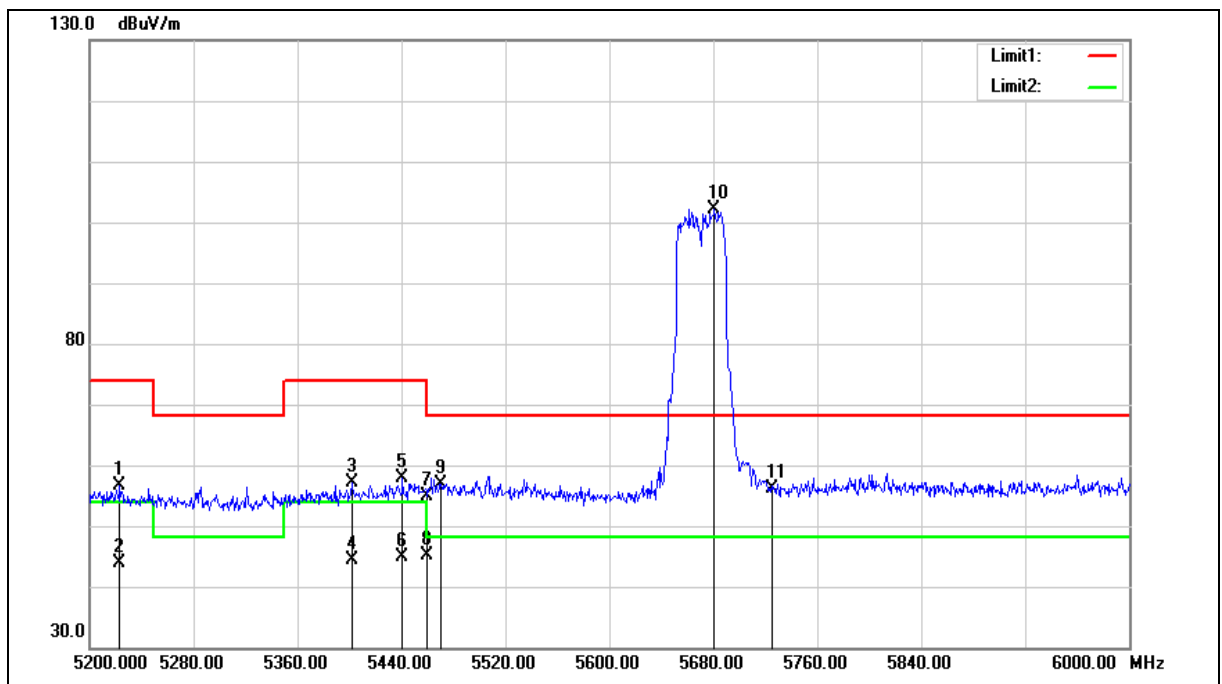

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5670 MHz	Temp.(°C)/Hum. (%RH):	26(°C)/60 %RH
Mode:	Mode 10		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5223.200	50.35	6.23	56.58	74.00	-17.42	peak
2	5223.200	37.64	6.23	43.87	54.00	-10.13	AVG
3	5401.600	50.52	6.63	57.15	74.00	-16.85	peak
4	5401.600	37.76	6.63	44.39	54.00	-9.61	AVG
5	5440.800	51.11	6.73	57.84	74.00	-16.16	peak
6	5440.800	38.17	6.73	44.90	54.00	-9.10	AVG
7	5460.000	48.22	6.77	54.99	74.00	-19.01	peak
8	5460.000	38.44	6.77	45.21	54.00	-8.79	AVG
9	5470.000	50.19	6.80	56.99	68.20	-11.21	peak
10	5680.800	94.93	7.24	102.17	--	--	peak
11	5725.000	48.76	7.32	56.08	68.20	-12.12	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5755 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 10		
Ant.Polar.:	Horizontal		

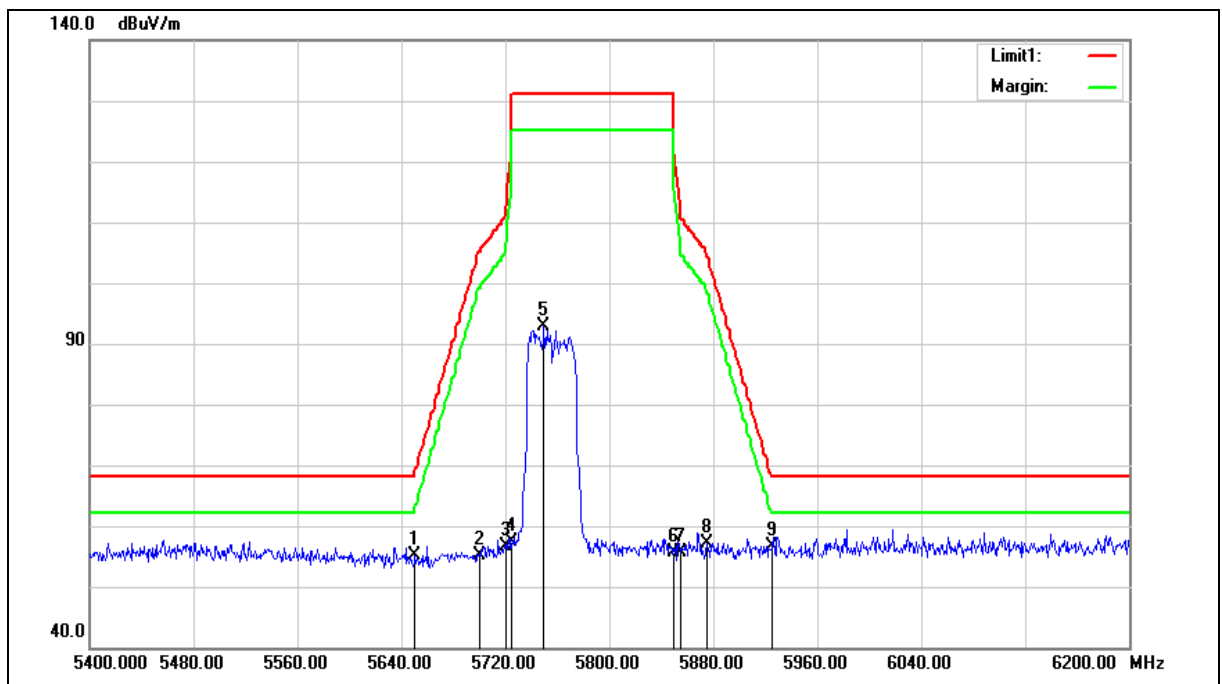

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5755 MHz	Temp.(°C)/Hum. (%RH):	26(°C)/60 %RH
Mode:	Mode 10		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5650.000	47.94	7.17	55.11	68.20	-13.09	peak
2	5700.000	47.97	7.27	55.24	105.20	-49.96	peak
3	5720.000	49.40	7.31	56.71	110.80	-54.09	peak
4	5725.000	50.08	7.32	57.40	122.20	-64.80	peak
5	5749.600	85.61	7.37	92.98	--	--	peak
6	5850.000	48.12	7.59	55.71	122.20	-66.49	peak
7	5855.000	48.07	7.60	55.67	110.80	-55.13	peak
8	5875.000	49.44	7.64	57.08	105.20	-48.12	peak
9	5925.000	48.86	7.75	56.61	68.20	-11.59	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5755 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 10		
Ant.Polar.:	Vertical		

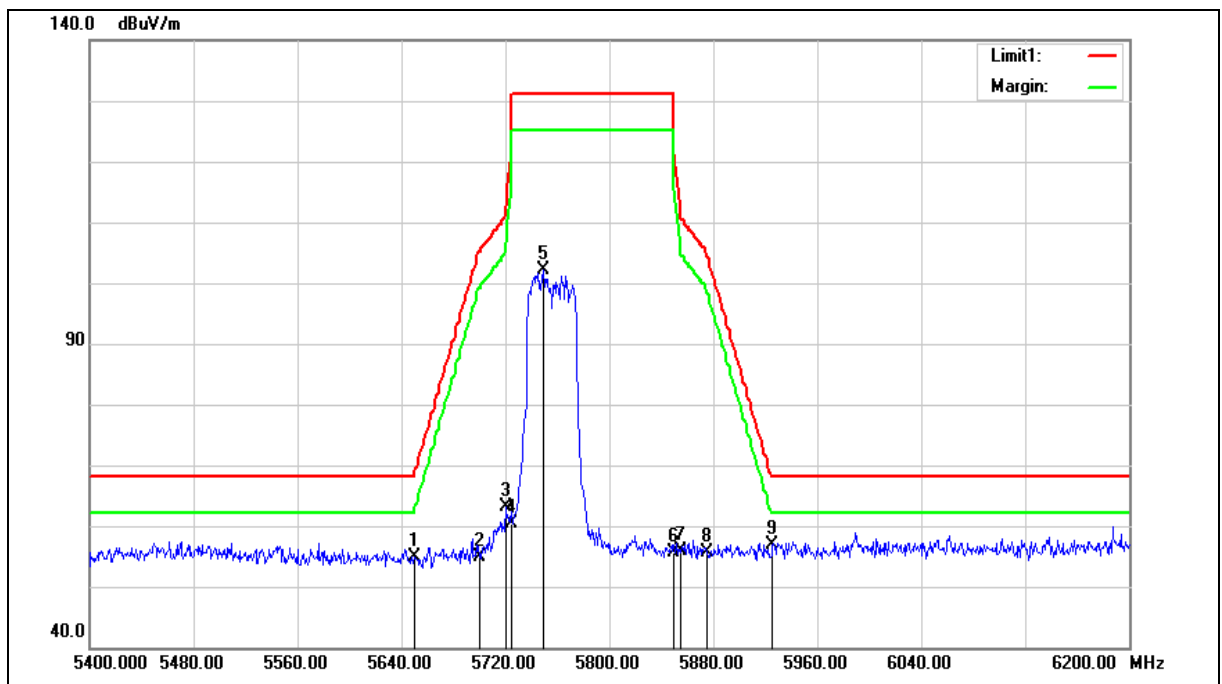

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5755 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 10		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5650.000	47.67	7.17	54.84	68.20	-13.36	peak
2	5700.000	47.70	7.27	54.97	105.20	-50.23	peak
3	5720.000	55.84	7.31	63.15	110.80	-47.65	peak
4	5725.000	53.01	7.32	60.33	122.20	-61.87	peak
5	5749.600	94.70	7.37	102.07	--	--	peak
6	5850.000	48.06	7.59	55.65	122.20	-66.55	peak
7	5855.000	48.26	7.60	55.86	110.80	-54.94	peak
8	5875.000	48.04	7.64	55.68	105.20	-49.52	peak
9	5925.000	49.24	7.75	56.99	68.20	-11.21	peak

Note: 1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5795 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 10		
Ant.Polar.:	Horizontal		

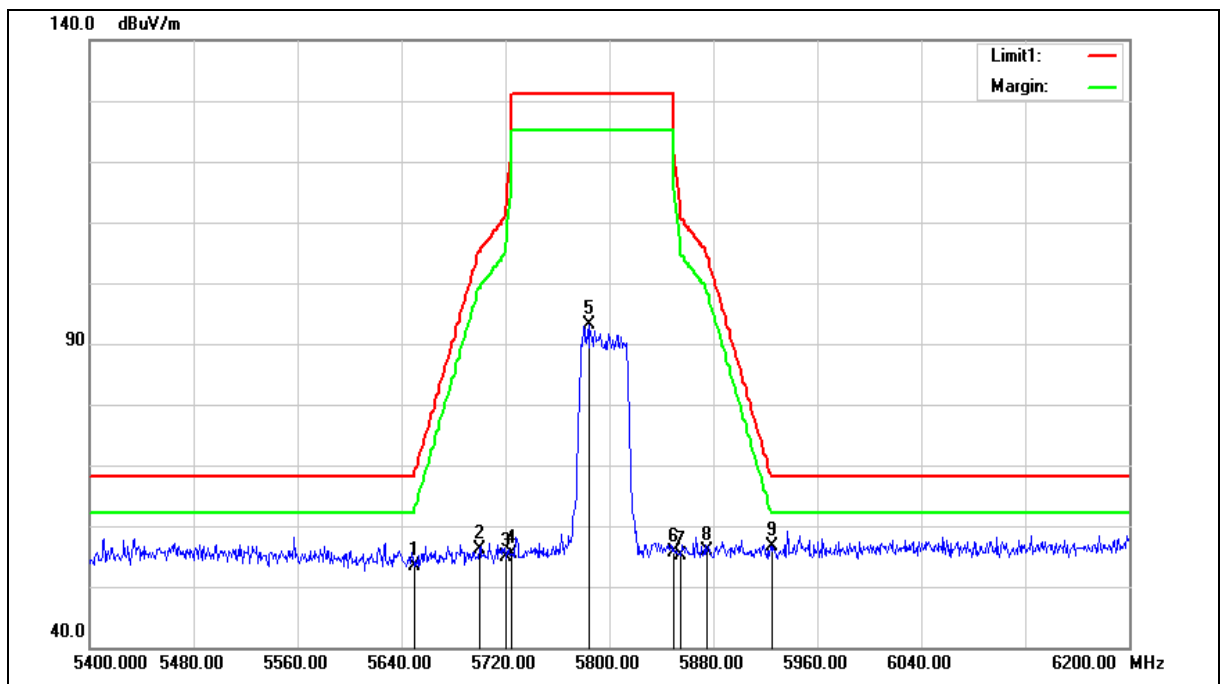

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5795 MHz	Temp.(°C)/Hum. (%RH):	26(°C)/60 %RH
Mode:	Mode 10		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5650.000	46.29	7.17	53.46	68.20	-14.74	peak
2	5700.000	48.90	7.27	56.17	105.20	-49.03	peak
3	5720.000	47.67	7.31	54.98	110.80	-55.82	peak
4	5725.000	48.08	7.32	55.40	122.20	-66.80	peak
5	5784.800	85.59	7.46	93.05	--	--	peak
6	5850.000	48.08	7.59	55.67	122.20	-66.53	peak
7	5855.000	47.48	7.60	55.08	110.80	-55.72	peak
8	5875.000	48.27	7.64	55.91	105.20	-49.29	peak
9	5925.000	48.77	7.75	56.52	68.20	-11.68	peak

Note: 1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5795 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 10		
Ant.Polar.:	Vertical		

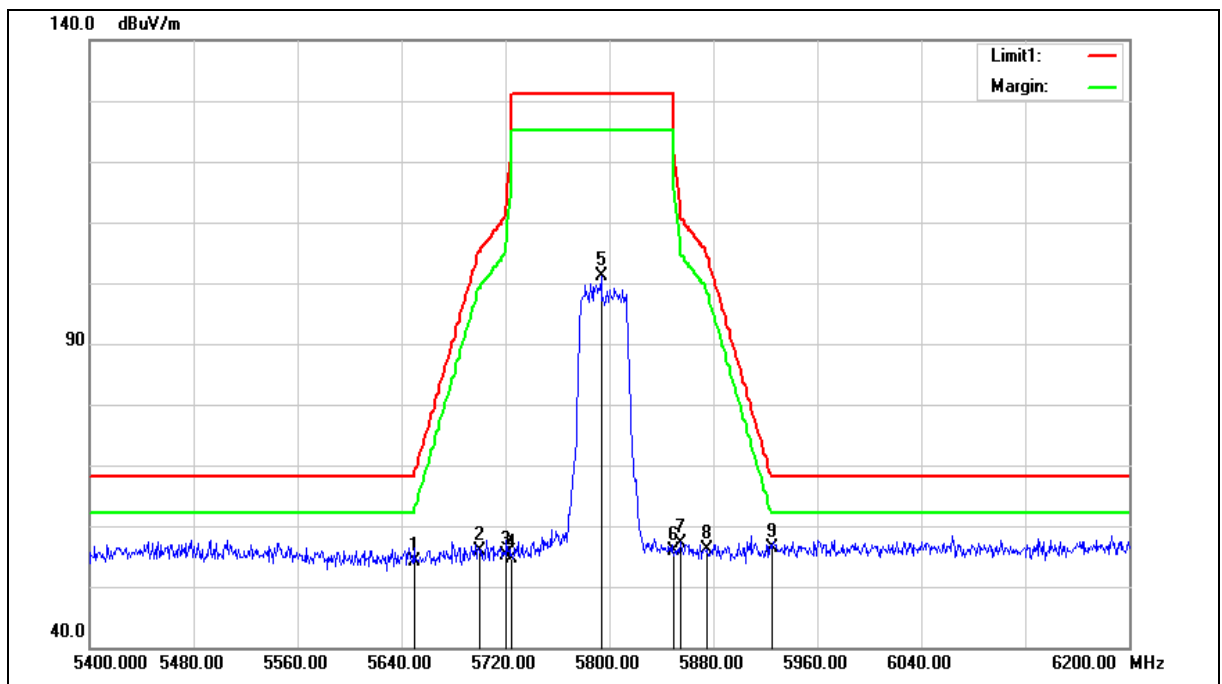

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5795 MHz	Temp.(°C)/Hum. (%RH):	26(°C)/60 %RH
Mode:	Mode 10		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5650.000	46.97	7.17	54.14	68.20	-14.06	peak
2	5700.000	48.65	7.27	55.92	105.20	-49.28	peak
3	5720.000	47.85	7.31	55.16	110.80	-55.64	peak
4	5725.000	47.24	7.32	54.56	122.20	-67.64	peak
5	5793.600	93.77	7.47	101.24	--	--	peak
6	5850.000	48.40	7.59	55.99	122.20	-66.21	peak
7	5855.000	49.49	7.60	57.09	110.80	-53.71	peak
8	5875.000	48.57	7.64	56.21	105.20	-48.99	peak
9	5925.000	48.63	7.75	56.38	68.20	-11.82	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5210 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 11		
Ant.Polar.:	Horizontal		

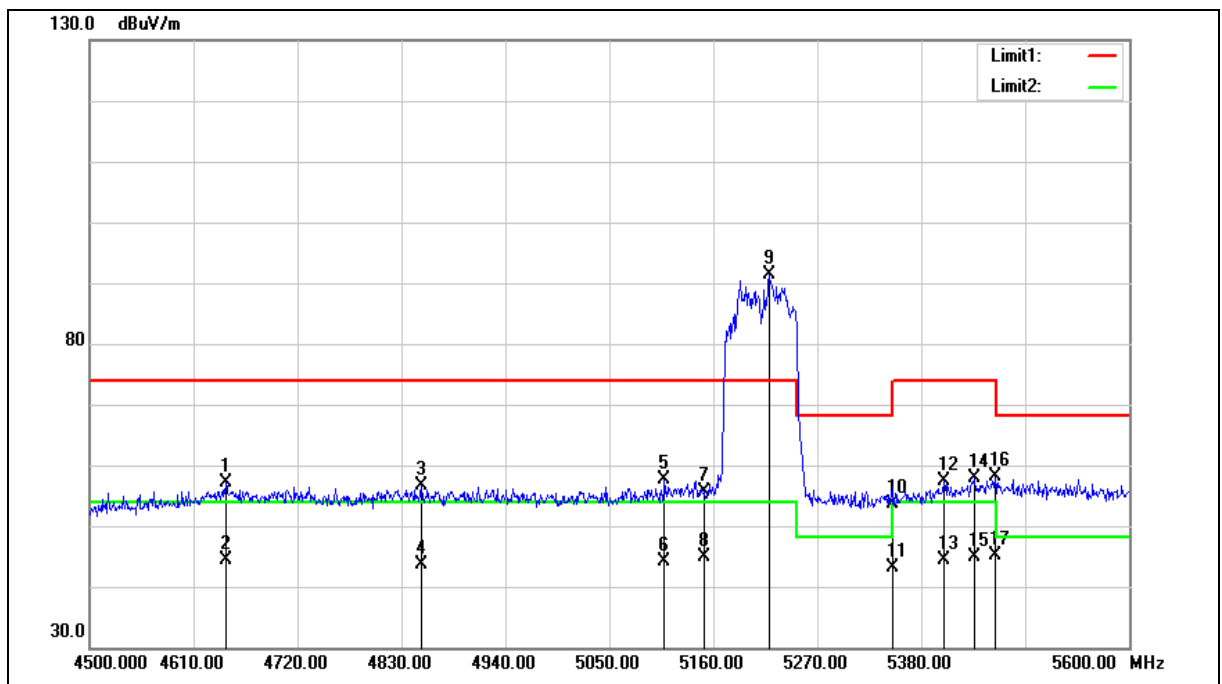

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5210 MHz	Temp.(°C)/Hum. (%RH):	26(°C)/60 %RH
Mode:	Mode 11		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4644.100	52.11	5.01	57.12	74.00	-16.88	peak
2	4644.100	39.44	5.01	44.45	54.00	-9.55	AVG
3	4850.900	51.22	5.42	56.64	74.00	-17.36	peak
4	4850.900	38.29	5.42	43.71	54.00	-10.29	AVG
5	5108.300	51.72	5.97	57.69	74.00	-16.31	peak
6	5108.300	38.13	5.97	44.10	54.00	-9.90	AVG
7	5150.000	49.62	6.07	55.69	74.00	-18.31	peak
8	5150.000	38.69	6.07	44.76	54.00	-9.24	AVG
9	5219.400	85.18	6.22	91.40	--	--	peak
10	5350.000	47.23	6.52	53.75	74.00	-20.25	peak
11	5350.000	36.64	6.52	43.16	54.00	-10.84	AVG
12	5404.200	50.70	6.64	57.34	74.00	-16.66	peak
13	5404.200	37.79	6.64	44.43	54.00	-9.57	AVG
14	5436.100	51.10	6.71	57.81	74.00	-16.19	peak
15	5436.100	38.16	6.71	44.87	54.00	-9.13	AVG
16	5458.100	51.44	6.76	58.20	74.00	-15.80	peak
17	5458.100	38.31	6.76	45.07	54.00	-8.93	AVG

Note: 1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5210 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 11		
Ant.Polar.:	Vertical		

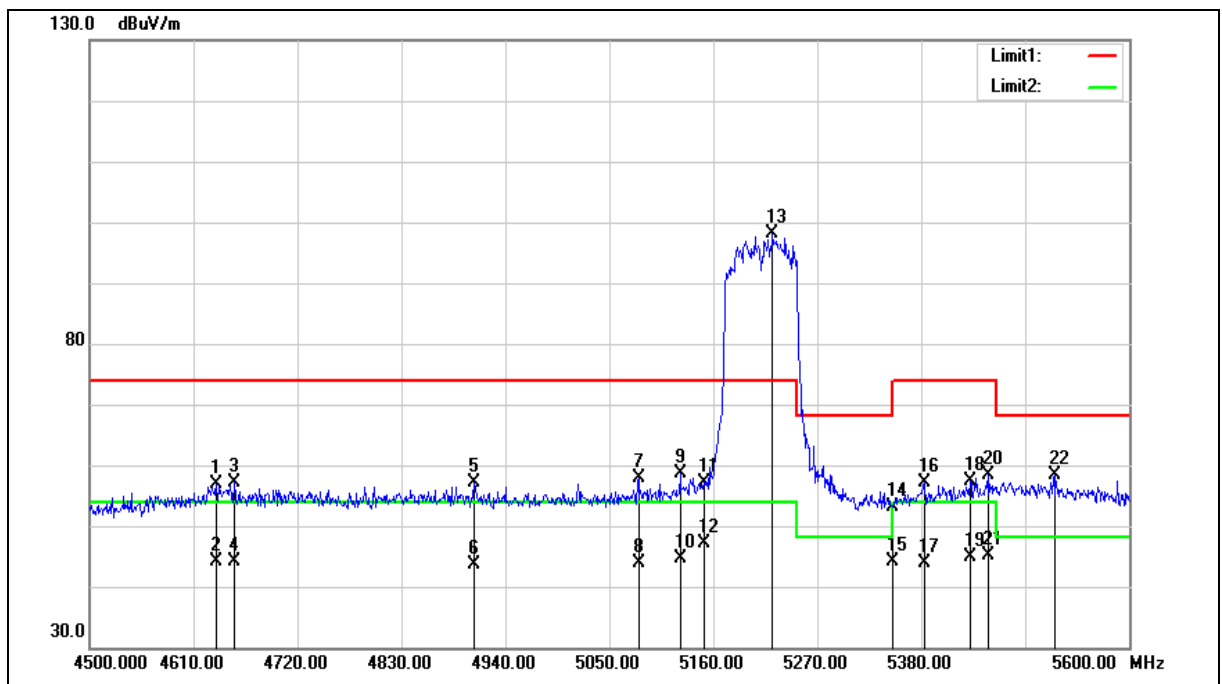

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5210 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 11		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4634.200	51.94	4.99	56.93	74.00	-17.07	peak
2	4634.200	39.26	4.99	44.25	54.00	-9.75	AVG
3	4652.900	52.00	5.02	57.02	74.00	-16.98	peak
4	4652.900	39.04	5.02	44.06	54.00	-9.94	AVG
5	4907.000	51.62	5.54	57.16	74.00	-16.84	peak
6	4907.000	38.17	5.54	43.71	54.00	-10.29	AVG
7	5080.800	51.92	5.91	57.83	74.00	-16.17	peak
8	5080.800	37.97	5.91	43.88	54.00	-10.12	AVG
9	5124.800	52.70	6.01	58.71	74.00	-15.29	peak
10	5124.800	38.70	6.01	44.71	54.00	-9.29	AVG
11	5150.000	50.95	6.07	57.02	74.00	-16.98	peak
12	5150.000	41.09	6.07	47.16	54.00	-6.84	AVG
13	5222.700	92.01	6.23	98.24	--	--	peak
14	5350.000	46.73	6.52	53.25	74.00	-20.75	peak
15	5350.000	37.66	6.52	44.18	54.00	-9.82	AVG
16	5383.300	50.61	6.59	57.20	74.00	-16.80	peak
17	5383.300	37.37	6.59	43.96	54.00	-10.04	AVG
18	5431.700	50.74	6.71	57.45	74.00	-16.55	peak
19	5431.700	38.14	6.71	44.85	54.00	-9.15	AVG
20	5451.500	51.59	6.75	58.34	74.00	-15.66	peak
21	5451.500	38.33	6.75	45.08	54.00	-8.92	AVG
22	5521.900	51.44	6.91	58.35	68.20	-9.85	peak

Note: 1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5290 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 11		
Ant.Polar.:	Horizontal		

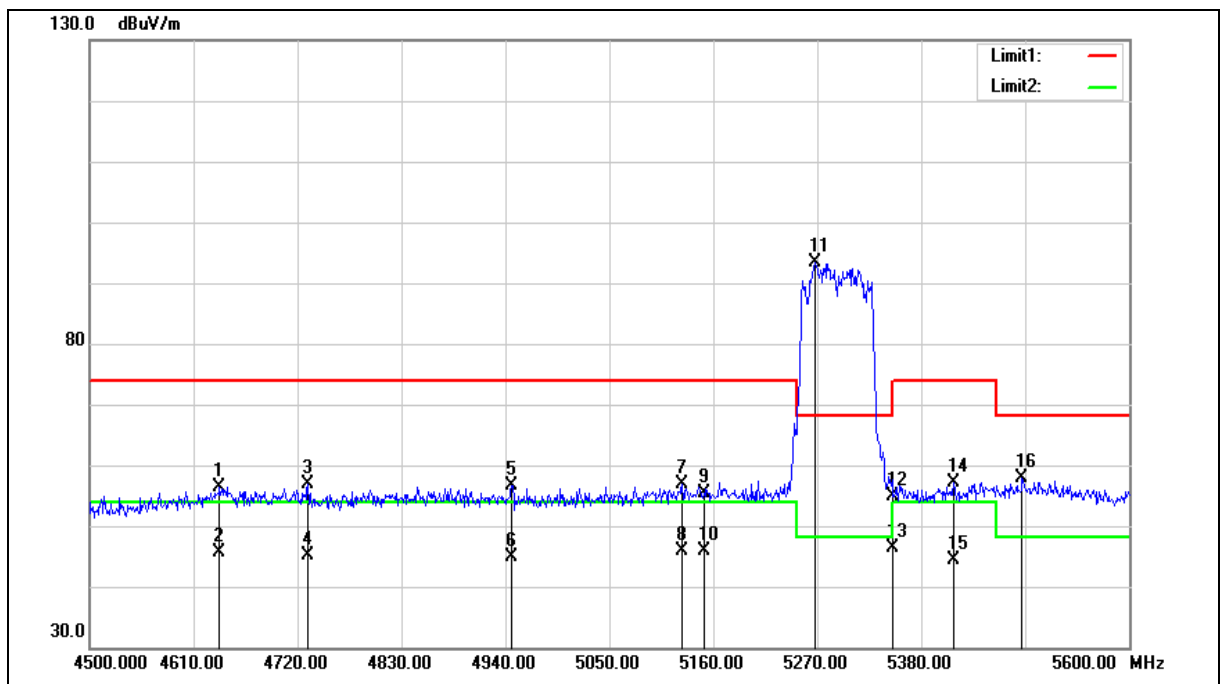

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5290 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 11		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4637.500	51.40	5.00	56.40	74.00	-17.60	peak
2	4637.500	40.65	5.00	45.65	54.00	-8.35	AVG
3	4731.000	51.66	5.18	56.84	74.00	-17.16	peak
4	4731.000	39.98	5.18	45.16	54.00	-8.84	AVG
5	4946.600	51.13	5.62	56.75	74.00	-17.25	peak
6	4946.600	39.27	5.62	44.89	54.00	-9.11	AVG
7	5127.000	50.97	6.02	56.99	74.00	-17.01	peak
8	5127.000	39.75	6.02	45.77	54.00	-8.23	AVG
9	5150.000	49.41	6.07	55.48	74.00	-18.52	peak
10	5150.000	39.79	6.07	45.86	54.00	-8.14	AVG
11	5267.800	87.02	6.34	93.36	--	--	peak
12	5350.000	48.39	6.52	54.91	74.00	-19.09	peak
13	5350.000	39.82	6.52	46.34	54.00	-7.66	AVG
14	5414.100	50.47	6.67	57.14	74.00	-16.86	peak
15	5414.100	37.83	6.67	44.50	54.00	-9.50	AVG
16	5486.700	50.94	6.83	57.77	68.20	-10.43	peak

Note: 1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5290 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 11		
Ant.Polar.:	Vertical		

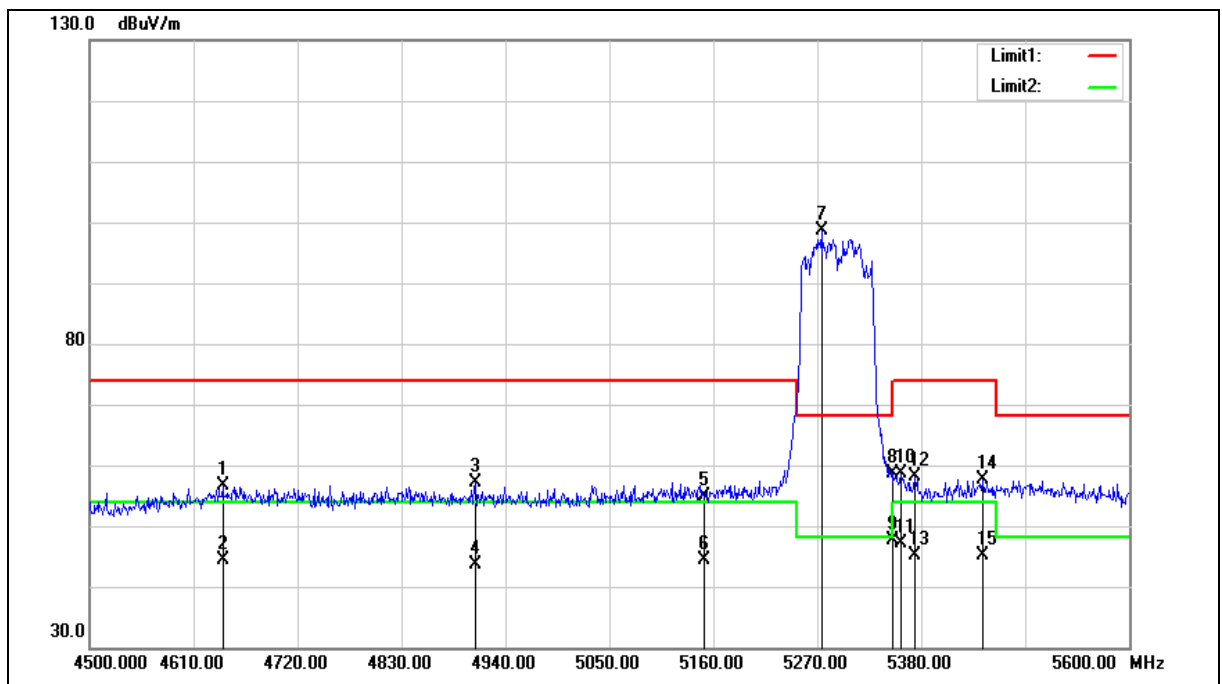

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5290 MHz	Temp.(°C)/Hum. (%RH):	26(°C)/60 %RH
Mode:	Mode 11		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4640.800	51.66	5.00	56.66	74.00	-17.34	peak
2	4640.800	39.46	5.00	44.46	54.00	-9.54	AVG
3	4908.100	51.54	5.55	57.09	74.00	-16.91	peak
4	4908.100	38.16	5.55	43.71	54.00	-10.29	AVG
5	5150.000	48.80	6.07	54.87	74.00	-19.13	peak
6	5150.000	38.39	6.07	44.46	54.00	-9.54	AVG
7	5274.400	92.20	6.35	98.55	--	--	peak
8	5350.000	52.21	6.52	58.73	74.00	-15.27	peak
9	5350.000	40.99	6.52	47.51	54.00	-6.49	AVG
10	5358.000	52.11	6.53	58.64	74.00	-15.36	peak
11	5358.000	40.55	6.53	47.08	54.00	-6.92	AVG
12	5373.400	51.44	6.57	58.01	74.00	-15.99	peak
13	5373.400	38.66	6.57	45.23	54.00	-8.77	AVG
14	5444.900	50.95	6.74	57.69	74.00	-16.31	peak
15	5444.900	38.35	6.74	45.09	54.00	-8.91	AVG

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5530 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 11		
Ant.Polar.:	Horizontal		

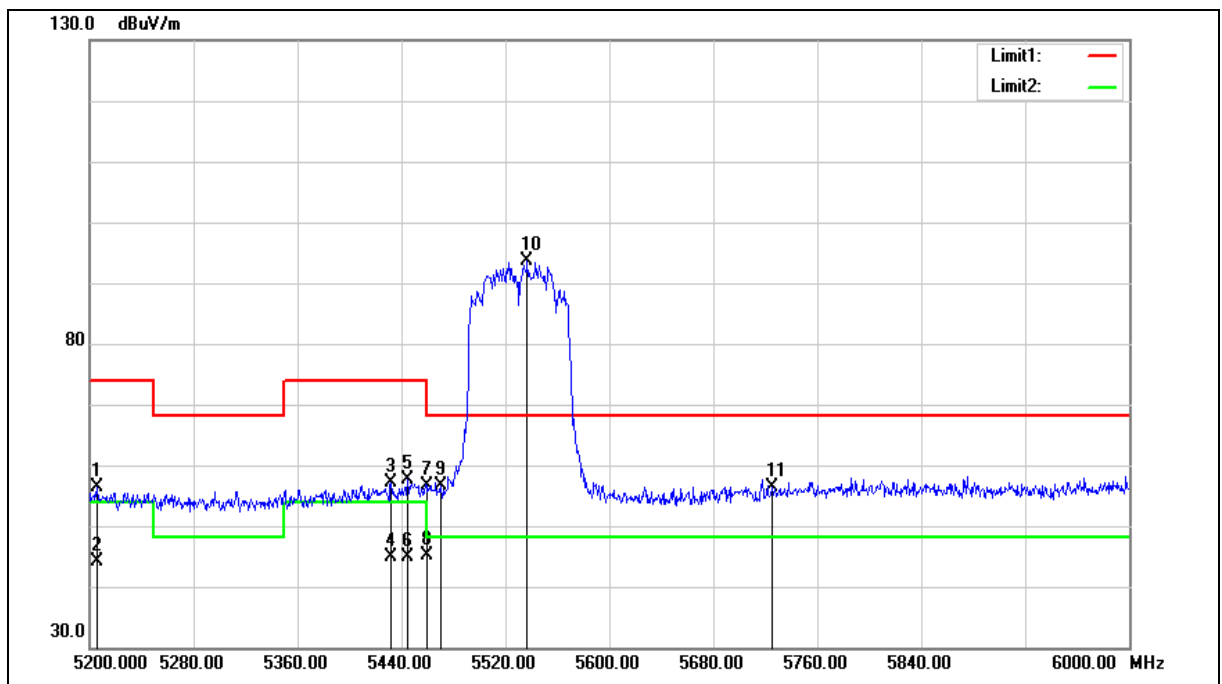

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5530 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 11		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5205.600	50.08	6.19	56.27	74.00	-17.73	peak
2	5205.600	37.93	6.19	44.12	54.00	-9.88	AVG
3	5432.000	50.31	6.71	57.02	74.00	-16.98	peak
4	5432.000	38.06	6.71	44.77	54.00	-9.23	AVG
5	5444.800	50.91	6.74	57.65	74.00	-16.35	peak
6	5444.800	38.16	6.74	44.90	54.00	-9.10	AVG
7	5460.000	49.86	6.77	56.63	74.00	-17.37	peak
8	5460.000	38.25	6.77	45.02	54.00	-8.98	AVG
9	5470.000	49.73	6.80	56.53	68.20	-11.67	peak
10	5536.800	86.71	6.94	93.65	--	--	peak
11	5725.000	49.12	7.32	56.44	68.20	-11.76	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5530 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 11		
Ant.Polar.:	Vertical		

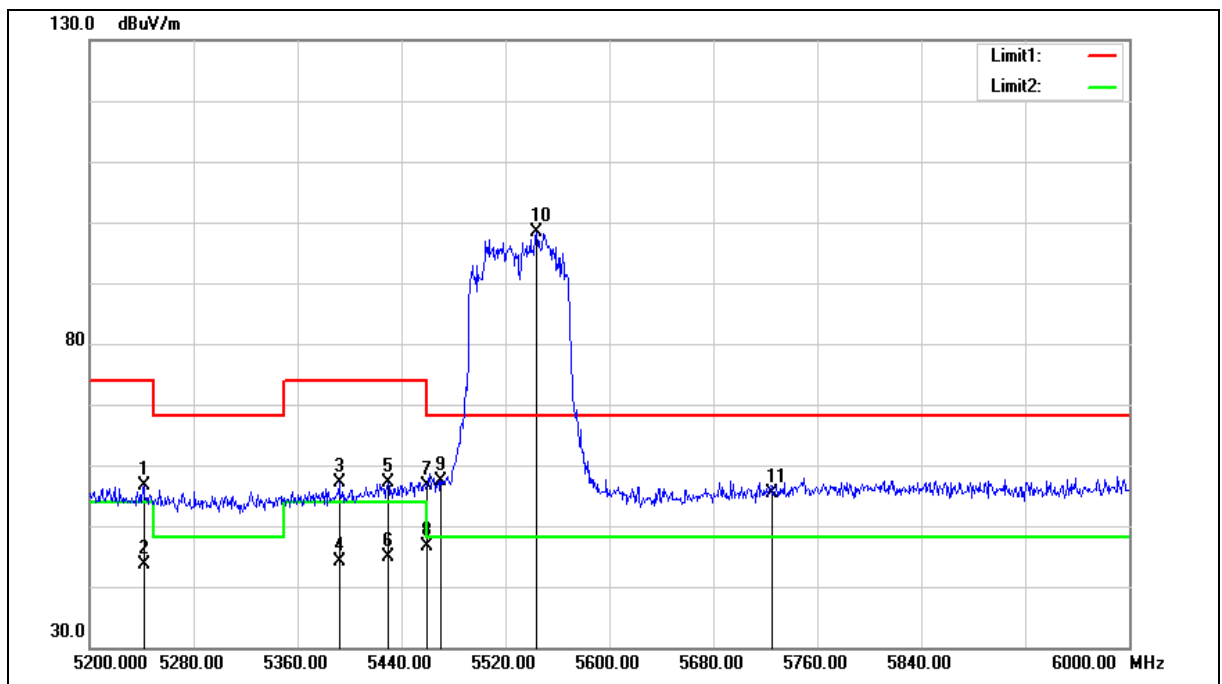

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5530 MHz	Temp.(°C)/Hum. (%RH):	26(°C)/60 %RH
Mode:	Mode 11		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5241.600	50.31	6.27	56.58	74.00	-17.42	peak
2	5241.600	37.24	6.27	43.51	54.00	-10.49	AVG
3	5392.000	50.40	6.62	57.02	74.00	-16.98	peak
4	5392.000	37.43	6.62	44.05	54.00	-9.95	AVG
5	5429.600	50.46	6.70	57.16	74.00	-16.84	peak
6	5429.600	38.15	6.70	44.85	54.00	-9.15	AVG
7	5460.000	49.91	6.77	56.68	74.00	-17.32	peak
8	5460.000	39.78	6.77	46.55	54.00	-7.45	AVG
9	5470.000	50.54	6.80	57.34	68.20	-10.86	peak
10	5544.000	91.49	6.95	98.44	--	--	peak
11	5725.000	48.16	7.32	55.48	68.20	-12.72	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5775 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 11		
Ant.Polar.:	Horizontal		

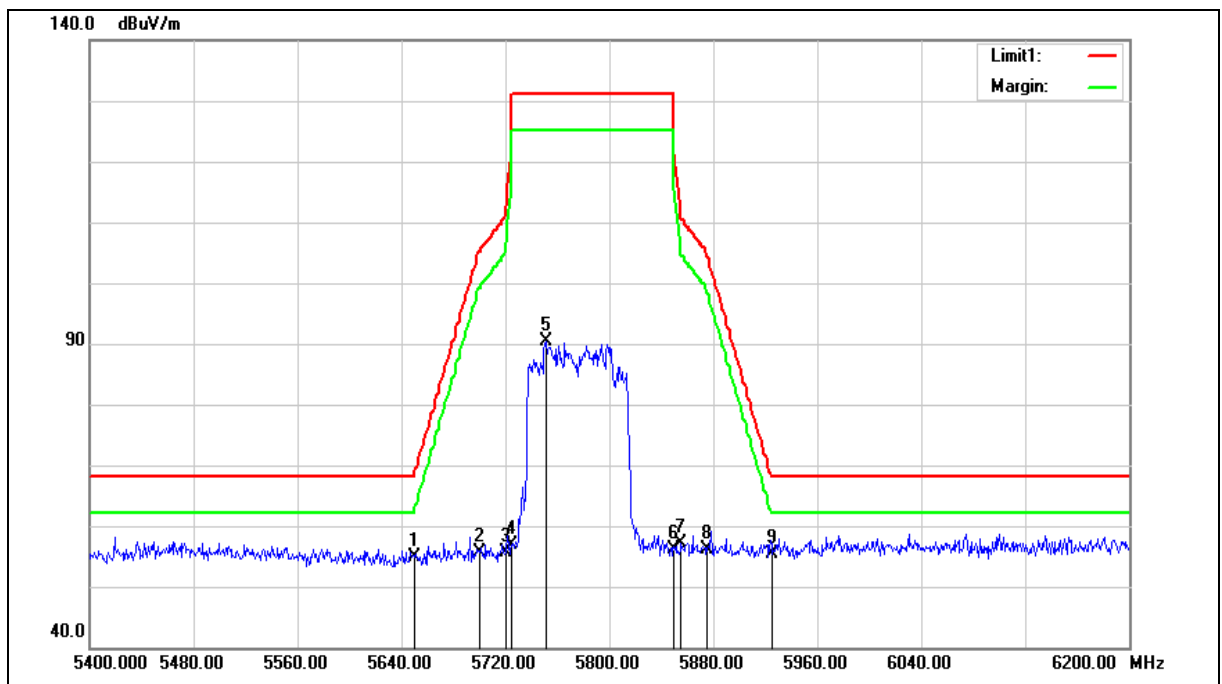

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5775 MHz	Temp.(°C)/Hum. (%RH):	26(°C)/60 %RH
Mode:	Mode 11		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5650.000	47.67	7.17	54.84	68.20	-13.36	peak
2	5700.000	48.29	7.27	55.56	105.20	-49.64	peak
3	5720.000	48.34	7.31	55.65	110.80	-55.15	peak
4	5725.000	49.68	7.32	57.00	122.20	-65.20	peak
5	5751.200	82.88	7.39	90.27	--	--	peak
6	5850.000	48.55	7.59	56.14	122.20	-66.06	peak
7	5855.000	49.46	7.60	57.06	110.80	-53.74	peak
8	5875.000	48.59	7.64	56.23	105.20	-48.97	peak
9	5925.000	47.63	7.75	55.38	68.20	-12.82	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5775 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 11		
Ant.Polar.:	Vertical		

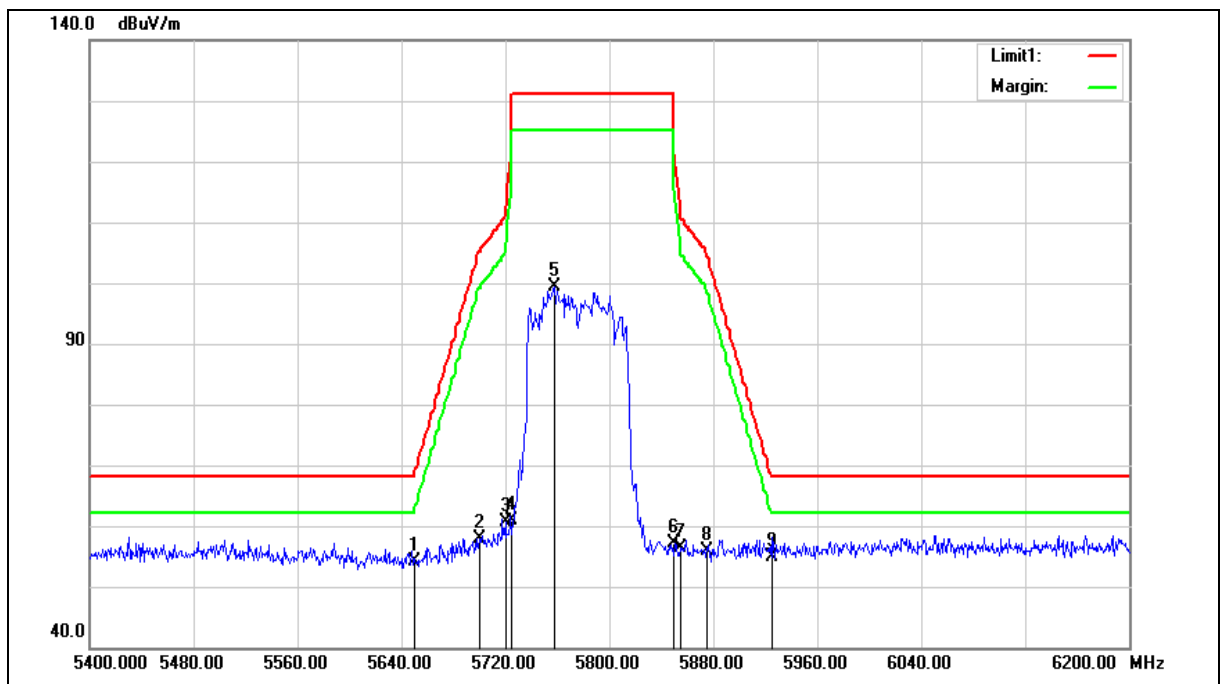

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5775 MHz	Temp.(°C)/Hum. (%RH):	26(°C)/60 %RH
Mode:	Mode 11		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5650.000	46.85	7.17	54.02	68.20	-14.18	peak
2	5700.000	50.71	7.27	57.98	105.20	-47.22	peak
3	5720.000	53.28	7.31	60.59	110.80	-50.21	peak
4	5725.000	53.64	7.32	60.96	122.20	-61.24	peak
5	5757.600	91.91	7.40	99.31	--	--	peak
6	5850.000	49.64	7.59	57.23	122.20	-64.97	peak
7	5855.000	48.74	7.60	56.34	110.80	-54.46	peak
8	5875.000	48.17	7.64	55.81	105.20	-49.39	peak
9	5925.000	47.19	7.75	54.94	68.20	-13.26	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5250 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 12		
Ant.Polar.:	Horizontal		

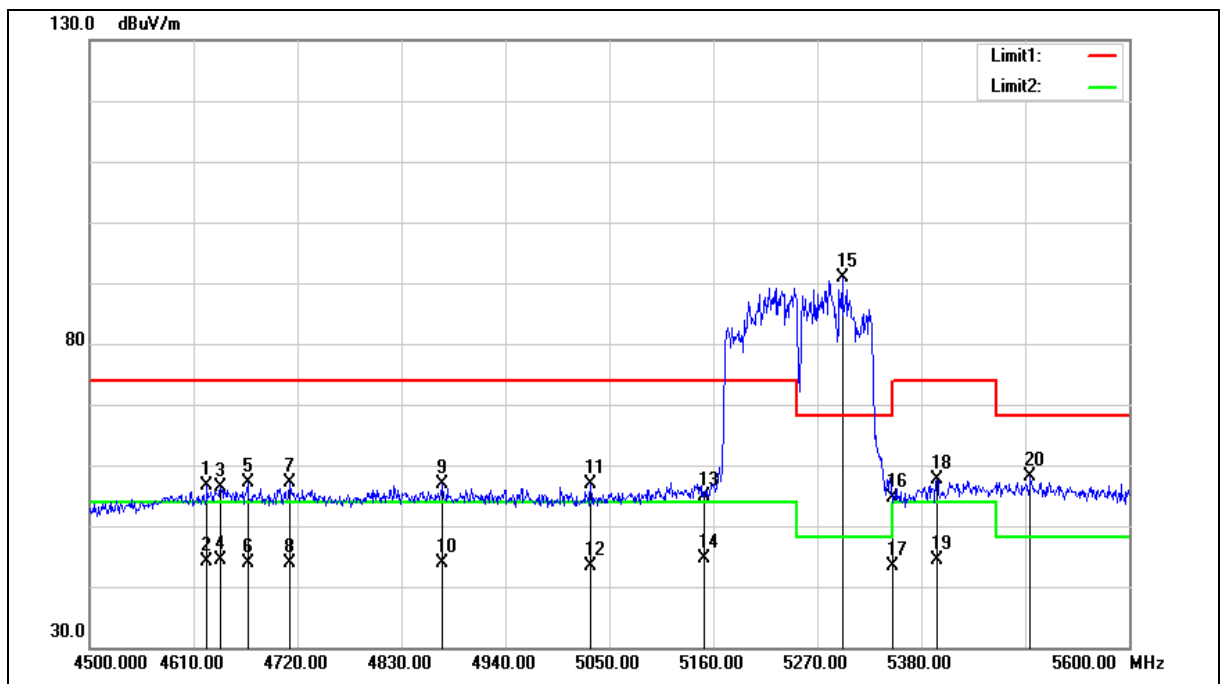

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5250 MHz	Temp.(°C)/Hum. (%RH):	26(°C)/60 %RH
Mode:	Mode 12		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4624.300	51.55	4.96	56.51	74.00	-17.49	peak
2	4624.300	39.07	4.96	44.03	54.00	-9.97	AVG
3	4638.600	51.43	5.00	56.43	74.00	-17.57	peak
4	4638.600	39.32	5.00	44.32	54.00	-9.68	AVG
5	4667.200	52.02	5.04	57.06	74.00	-16.94	peak
6	4667.200	38.76	5.04	43.80	54.00	-10.20	AVG
7	4712.300	51.90	5.14	57.04	74.00	-16.96	peak
8	4712.300	38.67	5.14	43.81	54.00	-10.19	AVG
9	4872.900	51.41	5.47	56.88	74.00	-17.12	peak
10	4872.900	38.39	5.47	43.86	54.00	-10.14	AVG
11	5030.200	51.10	5.79	56.89	74.00	-17.11	peak
12	5030.200	37.61	5.79	43.40	54.00	-10.60	AVG
13	5150.000	48.83	6.07	54.90	74.00	-19.10	peak
14	5150.000	38.63	6.07	44.70	54.00	-9.30	AVG
15	5296.400	84.47	6.40	90.87	--	--	peak
16	5350.000	47.99	6.52	54.51	74.00	-19.49	peak
17	5350.000	36.85	6.52	43.37	54.00	-10.63	AVG
18	5396.500	50.90	6.62	57.52	74.00	-16.48	peak
19	5396.500	37.69	6.62	44.31	54.00	-9.69	AVG
20	5495.500	51.36	6.85	58.21	68.20	-9.99	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5250 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 12		
Ant.Polar.:	Vertical		

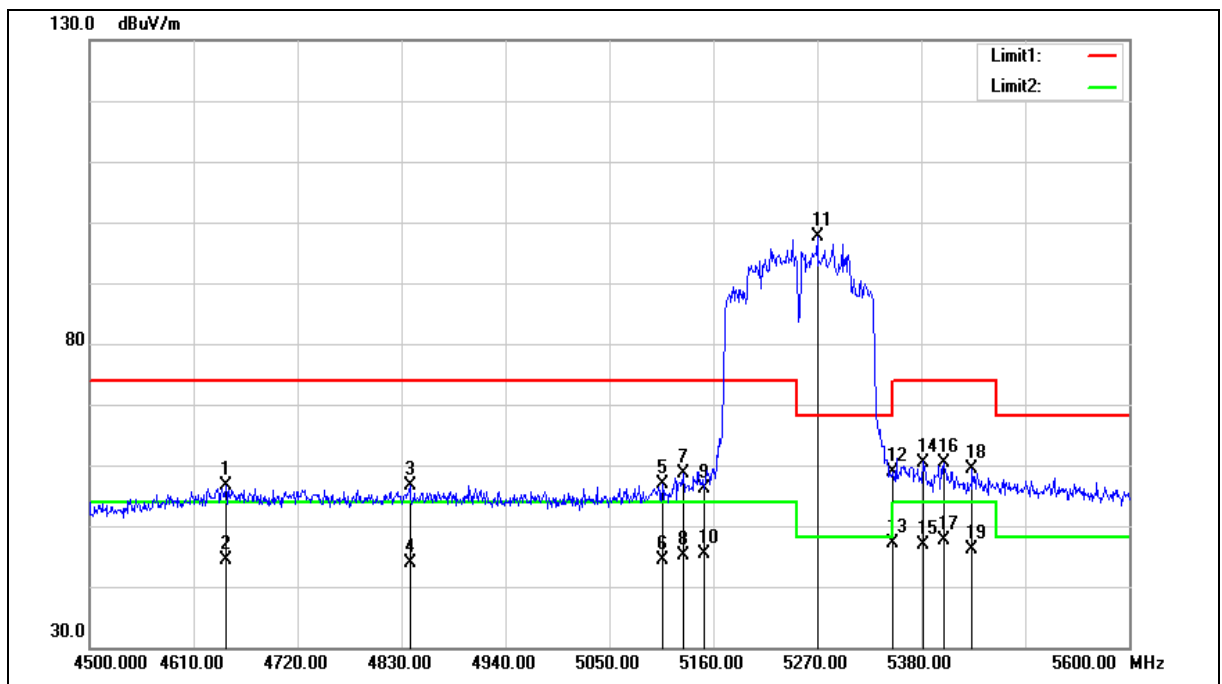

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5250 MHz	Temp.(°C)/Hum. (%RH):	26(°C)/60 %RH
Mode:	Mode 12		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4644.100	51.54	5.01	56.55	74.00	-17.45	peak
2	4644.100	39.46	5.01	44.47	54.00	-9.53	AVG
3	4838.800	51.26	5.41	56.67	74.00	-17.33	peak
4	4838.800	38.46	5.41	43.87	54.00	-10.13	AVG
5	5106.100	50.82	5.97	56.79	74.00	-17.21	peak
6	5106.100	38.35	5.97	44.32	54.00	-9.68	AVG
7	5128.100	52.71	6.02	58.73	74.00	-15.27	peak
8	5128.100	39.12	6.02	45.14	54.00	-8.86	AVG
9	5150.000	49.99	6.07	56.06	74.00	-17.94	peak
10	5150.000	39.32	6.07	45.39	54.00	-8.61	AVG
11	5270.000	91.26	6.35	97.61	--	--	peak
12	5350.000	52.31	6.52	58.83	74.00	-15.17	peak
13	5350.000	40.68	6.52	47.20	54.00	-6.80	AVG
14	5382.200	53.91	6.59	60.50	74.00	-13.50	peak
15	5382.200	40.31	6.59	46.90	54.00	-7.10	AVG
16	5404.200	53.82	6.64	60.46	74.00	-13.54	peak
17	5404.200	40.99	6.64	47.63	54.00	-6.37	AVG
18	5433.900	52.56	6.71	59.27	74.00	-14.73	peak
19	5433.900	39.45	6.71	46.16	54.00	-7.84	AVG

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5570 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 12		
Ant.Polar.:	Horizontal		

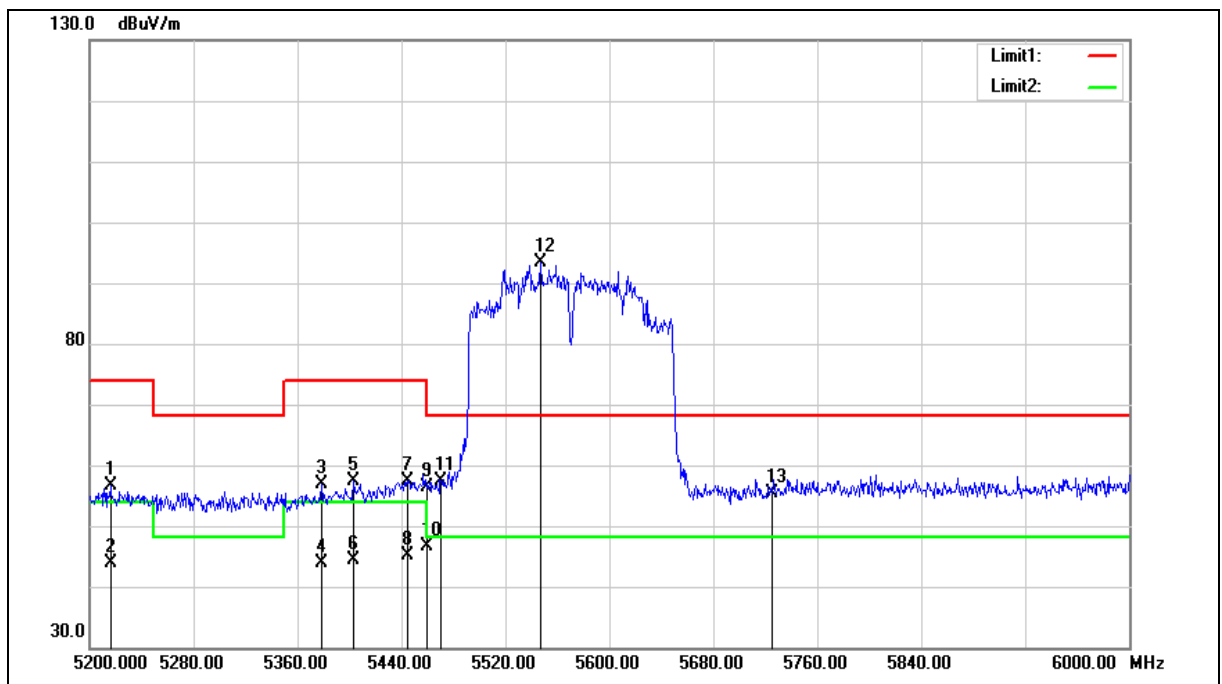

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5570 MHz	Temp.(°C)/Hum. (%RH):	26(°C)/60 %RH
Mode:	Mode 12		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5216.000	50.29	6.22	56.51	74.00	-17.49	peak
2	5216.000	37.75	6.22	43.97	54.00	-10.03	AVG
3	5378.400	50.37	6.58	56.95	74.00	-17.05	peak
4	5378.400	37.23	6.58	43.81	54.00	-10.19	AVG
5	5403.200	50.63	6.64	57.27	74.00	-16.73	peak
6	5403.200	37.70	6.64	44.34	54.00	-9.66	AVG
7	5444.800	50.58	6.74	57.32	74.00	-16.68	peak
8	5444.800	38.30	6.74	45.04	54.00	-8.96	AVG
9	5460.000	49.64	6.77	56.41	74.00	-17.59	peak
10	5460.000	39.92	6.77	46.69	54.00	-7.31	AVG
11	5470.000	50.50	6.80	57.30	68.20	-10.90	peak
12	5547.200	86.46	6.96	93.42	--	--	peak
13	5725.000	48.01	7.32	55.33	68.20	-12.87	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5570 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 12		
Ant.Polar.:	Vertical		

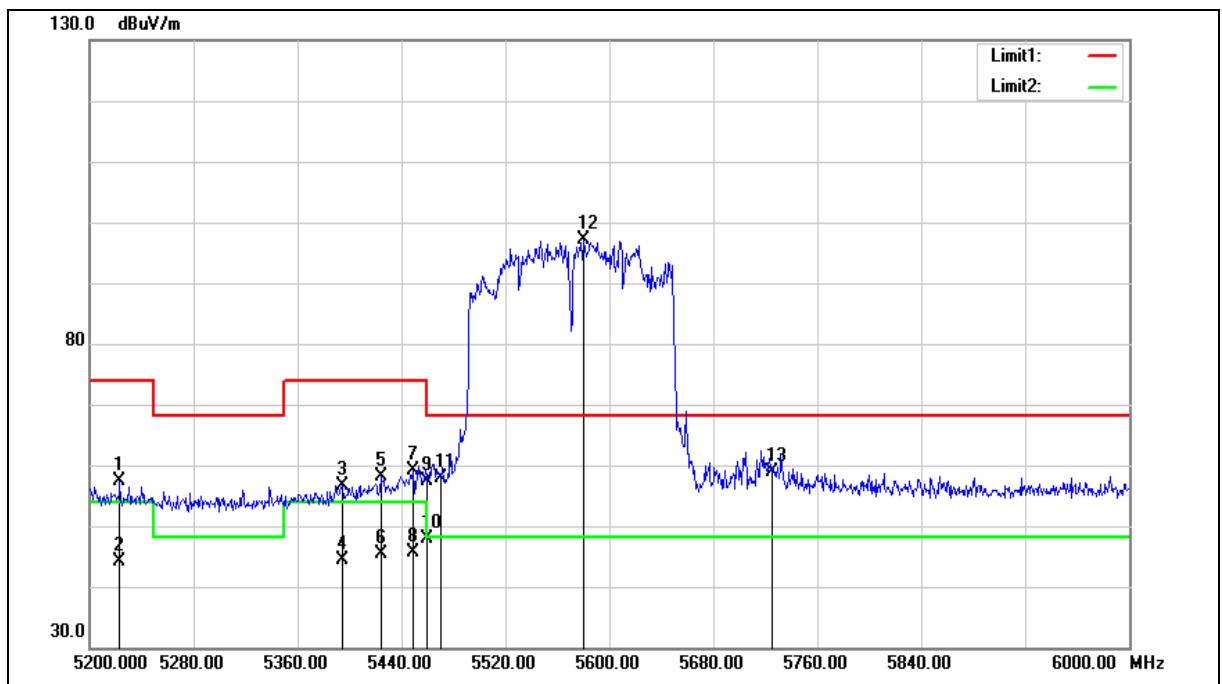

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	AC 110 V/60 Hz
Frequency:	5570 MHz	Temp.(°C)/Hum. (%RH):	26(°C)/60 %RH
Mode:	Mode 12		
Ant.Polar.:	Vertical		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5223.200	51.17	6.23	57.40	74.00	-16.60	peak
2	5223.200	37.99	6.23	44.22	54.00	-9.78	AVG
3	5394.400	50.04	6.62	56.66	74.00	-17.34	peak
4	5394.400	37.78	6.62	44.40	54.00	-9.60	AVG
5	5424.000	51.50	6.69	58.19	74.00	-15.81	peak
6	5424.000	38.63	6.69	45.32	54.00	-8.68	AVG
7	5448.800	52.37	6.75	59.12	74.00	-14.88	peak
8	5448.800	38.96	6.75	45.71	54.00	-8.29	AVG
9	5460.000	50.53	6.77	57.30	74.00	-16.70	peak
10	5460.000	41.01	6.77	47.78	54.00	-6.22	AVG
11	5470.000	50.96	6.80	57.76	68.20	-10.44	peak
12	5580.000	89.99	7.02	97.01	--	--	peak
13	5725.000	51.52	7.32	58.84	68.20	-9.36	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

4.3.2 最大傳導輸出功率之量測

合格標準:

依據 NCC 低功率射頻電機技術規範(LP0002)之 4.7.3 節之要求:

1. 5.15-5.25 GHz 頻帶

(1) 供戶外操作使用:

- 最大傳導輸出功率不能超過 1 W。
- 在任何 1MHz 頻帶中最大功率頻譜密度不能超過 17 dBm。
- 使用超過 6 dBi 方向增益之發射天線時，應依超過 6 dBi 天線方向增益的 dBi 總量，等量減少最大傳導輸出功率及最大功率頻譜密度。
- 在水平面仰角超過 30 度時，其最大 EIRP 不能超過 21dBm。

(2) 供室內操作使用:

- 最大傳導輸出功率不能超過 1 W。
- 在任何 1MHz 頻帶中最大功率頻譜密度不能超過 17 dBm。
- 使用超過 6 dBi 方向增益之發射天線時，應依超過 6 dBi 天線方向增益的 dBi 總量，等量減少最大傳導輸出功率及最大功率頻譜密度。

(3) 供固定式點對點操作使用:

- 最大傳導輸出功率不能超過 1 W。
- 在任何 1MHz 頻帶中最大功率頻譜密度不能超過 17 dBm。
- 使用超過 23dBi 方向增益之指向性天線時，應依超過 23dBi 天線方向增益的 dBi 總量，等量減少最大傳導輸出功率及最大功率頻譜密度。
- 固定式點對點操作，不包括點對多點系統、全方向性應用及多台共站發射機傳送相同資訊。

(4) 供行動或可攜式裝置操作使用:

- 最大傳導輸出功率不能超過 250 mW。
- 在任何 1MHz 頻帶中最大功率頻譜密度不能超過 11dBm。
- 使用超過 6 dBi 方向增益之發射天線時，應依超過 6 dBi 天線方向增益的 dBi 總量，等量減少最大傳導輸出功率及最大功率頻譜密度。

2. 5.25-5.35 GHz 與 5.470-5.725GHz 頻帶

- (1) 最大傳導輸出功率不能超過 250 mW 或 $11 \text{ dBm} + 10 \log B$ (B 是 26 dB 發射頻寬，單位 MHz)之較小者。
- (2) 最大功率頻譜密度在任何 1 MHz 頻帶中不能超過 11 dBm。
- (3) 使用超過 6 dBi 方向增益之發射天線時，應依超過 6 dBi 天線方向增益的 dBi 總量，等量減少最大傳導輸出功率及最大功率頻譜密度。

3. 5.725-5.850 GHz 頻帶

- (1) 最大傳導輸出功率不能超過 1 W。
- (2) 在任何 500 kHz 頻帶中最大功率頻譜密度不能超過 30 dBm。
- (3) 供固定式點對點操作時，使用方向增益超過 6 dBi 之發射天線，可不需對應減少發射器之傳導輸出功率限制值。
- (4) 除(3)外，使用超過 6 dBi 方向增益之發射天線時，應依超過 6 dBi 天線方向增益的 dBi 總量，等量減少最大傳導輸出功率及最大功率頻譜密度。


4. 最大傳導輸出功率必須使用依據均方根等效電壓校準之儀器量測於任何連續傳輸之時段，量測結果須依儀器限制（如偵測器反應時間、相較於發射頻寬有限之解析頻寬能力，靈敏度等）調整得出正確之峰值量測，以符合本段落所提之發射定義。

IEEE 802.11n 5 GHz 20 MHz / IEEE 802.11n 5 GHz 40 MHz / IEEE 802.11ac 20 MHz /

IEEE 802.11ac 40 MHz / IEEE 802.11ac 80 MHz / IEEE 802.11ac 160 MHz

* Directional Gain = $10 \cdot \log\{[10^{(G1/20)} + 10^{(G2/20)} + \dots + 10^{(Gn/20)}]^2 / NANT\} = 4.01 \text{ dBi} < 6 \text{ dBi}$

測試架構圖：

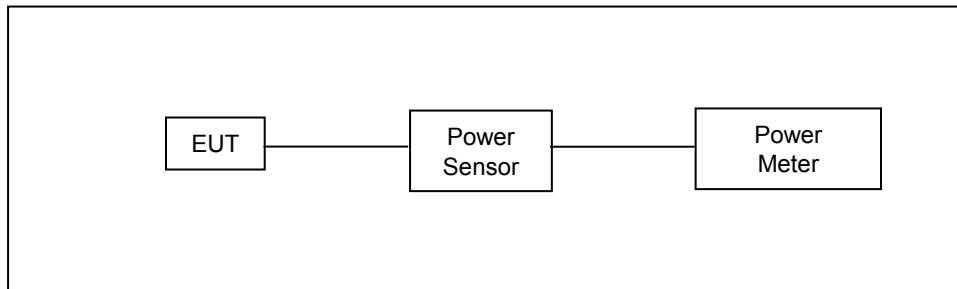

測試結果:

操作模式：Mode 6 / Mode 7 / Mode 8 / Mode 9 / Mode 10 / Mode 11 / Mode 12								
測試結果：合格								
操作模式	頻道 CH	頻率 MHz	Data Rate (Mbps)	最大傳導輸出功率				
				量測值				限制值
				ANT-0		ANT-1		
				dBm	W	dBm	W	
Mode 6	36	5180.0	6	13.52	0.022	13.21	0.021	≤ 24.00
	40	5200.0		13.42	0.022	13.14	0.021	≤ 24.00
	44	5220.0		13.20	0.021	12.86	0.019	≤ 24.00
	48	5240.0		13.11	0.020	12.75	0.019	≤ 24.00
	52	5260.0		12.97	0.020	12.75	0.019	≤ 24.00
	56	5280.0		12.76	0.019	12.61	0.018	≤ 24.00
	60	5300.0		12.71	0.019	12.60	0.018	≤ 24.00
	64	5320.0		12.59	0.018	12.52	0.018	≤ 24.00
	100	5500.0		11.91	0.016	11.31	0.014	≤ 24.00
	104	5520.0		12.14	0.016	11.48	0.014	≤ 24.00
	108	5540.0		12.09	0.016	11.37	0.014	≤ 24.00
	112	5560.0		12.02	0.016	11.36	0.014	≤ 24.00
	116	5580.0		12.21	0.017	11.68	0.015	≤ 24.00
	120	5600.0		12.20	0.017	11.86	0.015	≤ 24.00
	124	5620.0		12.23	0.017	11.78	0.015	≤ 24.00
	128	5640.0		12.29	0.017	11.60	0.014	≤ 24.00
	132	5660.0		12.24	0.017	11.67	0.015	≤ 24.00
	136	5680.0		12.32	0.017	11.64	0.015	≤ 24.00
	140	5700.0		12.28	0.017	11.63	0.015	≤ 24.00
	149	5745.0		13.02	0.020	12.68	0.019	≤ 30.00
	153	5765.0		13.13	0.021	12.74	0.019	≤ 30.00
	157	5785.0		13.13	0.021	12.64	0.018	≤ 30.00
	161	5805.0		13.29	0.021	12.96	0.020	≤ 30.00
	165	5825.0		13.42	0.022	13.09	0.020	≤ 30.00

操作模式：Mode 6 / Mode 7 / Mode 8 / Mode 9 / Mode 10 / Mode 11 / Mode 12										
測試結果：合格										
操作模式	頻道 CH	頻率 MHz	Data Rate (Mbps)	最大傳導輸出功率						
				量測值						限制值
				ANT-0		ANT-1		ANT-0+1		
				dBm	W	dBm	W	dBm	W	
Mode 7	36	5180.0	13	10.25	0.011	10.12	0.010	13.20	0.021	≤ 24.00
	40	5200.0		10.03	0.010	9.91	0.010	12.98	0.020	≤ 24.00
	44	5220.0		9.99	0.010	9.85	0.010	12.93	0.020	≤ 24.00
	48	5240.0		10.06	0.010	9.90	0.010	12.99	0.020	≤ 24.00
	52	5260.0		9.92	0.010	9.77	0.009	12.86	0.019	≤ 24.00
	56	5280.0		10.00	0.010	9.81	0.010	12.92	0.020	≤ 24.00
	60	5300.0		9.96	0.010	9.75	0.009	12.87	0.019	≤ 24.00
	64	5320.0		9.82	0.010	9.74	0.009	12.79	0.019	≤ 24.00
	100	5500.0		8.77	0.008	8.45	0.007	11.62	0.015	≤ 24.00
	104	5520.0		8.83	0.008	8.52	0.007	11.69	0.015	≤ 24.00
	108	5540.0		8.80	0.008	8.40	0.007	11.61	0.015	≤ 24.00
	112	5560.0		8.71	0.007	8.29	0.007	11.52	0.014	≤ 24.00
	116	5580.0		8.89	0.008	8.65	0.007	11.78	0.015	≤ 24.00
	120	5600.0		9.01	0.008	8.80	0.008	11.92	0.016	≤ 24.00
	124	5620.0		9.00	0.008	8.75	0.007	11.89	0.015	≤ 24.00
	128	5640.0		8.96	0.008	8.69	0.007	11.84	0.015	≤ 24.00
	132	5660.0		8.87	0.008	8.65	0.007	11.77	0.015	≤ 24.00
	136	5680.0		8.90	0.008	8.74	0.007	11.83	0.015	≤ 24.00
	140	5700.0		8.94	0.008	8.77	0.008	11.87	0.015	≤ 24.00
	149	5745.0		9.47	0.009	9.25	0.008	12.37	0.017	≤ 30.00
	153	5765.0		9.74	0.009	9.40	0.009	12.58	0.018	≤ 30.00
	157	5785.0		9.61	0.009	9.31	0.009	12.47	0.018	≤ 30.00
	161	5805.0		9.52	0.009	9.26	0.008	12.40	0.017	≤ 30.00
	165	5825.0		9.65	0.009	9.47	0.009	12.57	0.018	≤ 30.00

操作模式：Mode 6 / Mode 7 / Mode 8 / Mode 9 / Mode 10 / Mode 11 / Mode 12										
測試結果：合格										
操作模式	頻道 CH	頻率 MHz	Data Rate (Mbps)	最大傳導輸出功率						
				量測值						限制值
				ANT-0		ANT-1		ANT-0+1		
				dBm	W	dBm	W	dBm	W	
Mode 8	38	5190.0	27	7.98	0.006	7.67	0.006	10.84	0.012	≤ 24.00
	46	5230.0		7.85	0.006	7.38	0.005	10.63	0.012	≤ 24.00
	54	5270.0		7.83	0.006	7.35	0.005	10.61	0.011	≤ 24.00
	62	5310.0		7.78	0.006	7.20	0.005	10.51	0.011	≤ 24.00
	102	5510.0		8.48	0.007	8.38	0.007	11.44	0.014	≤ 24.00
	110	5550.0		8.51	0.007	8.39	0.007	11.46	0.014	≤ 24.00
	118	5590.0		8.81	0.008	8.56	0.007	11.70	0.015	≤ 24.00
	126	5630.0		8.70	0.007	8.43	0.007	11.58	0.014	≤ 24.00
	134	5670.0		8.53	0.007	8.40	0.007	11.48	0.014	≤ 24.00
	151	5755.0		9.75	0.009	9.40	0.009	12.59	0.018	≤ 30.00
	159	5795.0		9.73	0.009	9.67	0.009	12.71	0.019	≤ 30.00

操作模式：Mode 6 / Mode 7 / Mode 8 / Mode 9 / Mode 10 / Mode 11 / Mode 12										
測試結果：合格										
操作模式	頻道 CH	頻率 MHz	Data Rate (Mbps)	最大傳導輸出功率						
				量測值						限制值
				ANT-0		ANT-1		ANT-0+1		
				dBm	W	dBm	W	dBm	W	
Mode 9	36	5180.0	13	10.38	0.011	10.49	0.011	13.45	0.022	≤ 24.00
	40	5200.0		10.17	0.010	10.14	0.010	13.17	0.021	≤ 24.00
	44	5220.0		10.06	0.010	10.05	0.010	13.07	0.020	≤ 24.00
	48	5240.0		10.10	0.010	10.08	0.010	13.10	0.020	≤ 24.00
	52	5260.0		10.00	0.010	9.85	0.010	12.94	0.020	≤ 24.00
	56	5280.0		10.01	0.010	9.93	0.010	12.98	0.020	≤ 24.00
	60	5300.0		9.95	0.010	9.89	0.010	12.93	0.020	≤ 24.00
	64	5320.0		9.98	0.010	9.87	0.010	12.94	0.020	≤ 24.00
	100	5500.0		9.29	0.008	9.04	0.008	12.18	0.017	≤ 24.00
	104	5520.0		9.50	0.009	9.12	0.008	12.32	0.017	≤ 24.00
	108	5540.0		9.40	0.009	8.87	0.008	12.15	0.016	≤ 24.00
	112	5560.0		9.16	0.008	8.92	0.008	12.05	0.016	≤ 24.00
	116	5580.0		9.53	0.009	9.15	0.008	12.35	0.017	≤ 24.00
	120	5600.0		9.48	0.009	9.39	0.009	12.45	0.018	≤ 24.00
	124	5620.0		9.70	0.009	9.05	0.008	12.40	0.017	≤ 24.00
	128	5640.0		9.63	0.009	9.18	0.008	12.42	0.017	≤ 24.00
	132	5660.0		9.59	0.009	9.13	0.008	12.38	0.017	≤ 24.00
	136	5680.0		9.71	0.009	9.21	0.008	12.48	0.018	≤ 24.00
	140	5700.0		9.72	0.009	9.25	0.008	12.50	0.018	≤ 24.00
	149	5745.0		9.80	0.010	9.46	0.009	12.64	0.018	≤ 30.00
	153	5765.0		10.06	0.010	9.62	0.009	12.86	0.019	≤ 30.00
	157	5785.0		10.12	0.010	9.56	0.009	12.86	0.019	≤ 30.00
	161	5805.0		10.28	0.011	9.88	0.010	13.09	0.020	≤ 30.00
	165	5825.0		10.37	0.011	10.07	0.010	13.23	0.021	≤ 30.00

操作模式：Mode 6 / Mode 7 / Mode 8 / Mode 9 / Mode 10 / Mode 11 / Mode 12										
測試結果：合格										
操作模式	頻道 CH	頻率 MHz	Data Rate (Mbps)	最大傳導輸出功率						
				量測值						限制值
				ANT-0		ANT-1		ANT-0+1		
				dBm	W	dBm	W	dBm	W	
Mode 10	38	5190.0	27	8.49	0.007	8.08	0.006	11.30	0.013	≤ 24.00
	46	5230.0		8.11	0.006	7.78	0.006	10.96	0.012	≤ 24.00
	54	5270.0		7.80	0.006	7.71	0.006	10.77	0.012	≤ 24.00
	62	5310.0		7.58	0.006	7.34	0.005	10.47	0.011	≤ 24.00
	102	5510.0		8.77	0.008	8.64	0.007	11.72	0.015	≤ 24.00
	110	5550.0		8.57	0.007	8.45	0.007	11.52	0.014	≤ 24.00
	118	5590.0		9.03	0.008	8.95	0.008	12.00	0.016	≤ 24.00
	126	5630.0		9.02	0.008	8.78	0.008	11.91	0.016	≤ 24.00
	134	5670.0		9.20	0.008	8.67	0.007	11.95	0.016	≤ 24.00
	151	5755.0		9.92	0.010	9.73	0.009	12.84	0.019	≤ 30.00
159	5795.0	10.07	0.010	9.98	0.010	13.04	0.020	≤ 30.00		
Mode 11	42	5210.0	58.6	9.72	0.009	9.65	0.009	12.70	0.019	≤ 24.00
	58	5290.0		9.10	0.008	9.02	0.008	12.07	0.016	≤ 24.00
	106	5530.0		8.46	0.007	8.19	0.007	11.34	0.014	≤ 24.00
	122	5610.0		8.78	0.008	8.58	0.007	11.69	0.015	≤ 24.00
	155	5775.0		9.79	0.010	9.48	0.009	12.65	0.018	≤ 30.00
Mode 12	50	5250.0	130	9.43	0.009	9.37	0.009	12.41	0.017	≤ 24.00
	114	5250.0		8.92	0.008	8.72	0.007	11.83	0.015	≤ 24.00

4.3.3 最大傳導功率頻譜密度之要求

合格標準:

依據 NCC 低功率射頻電機技術規範(LP0002)之 4.7.3 節之要求:

1. 5.15-5.25 GHz 頻帶

(1) 供戶外操作使用:

- 在任何 1 MHz 頻帶中最大功率頻譜密度不能超過 17 dBm。
- 使用超過 6 dBi 方向增益之發射天線時，應依超過 6 dBi 天線方向增益的 dBi 總量，等量減少最大傳導輸出功率及最大功率頻譜密度。
- 在水平面仰角超過 30 度時，其最大 EIRP 不能超過 21 dBm。

(2) 供室內操作使用:

- 在任何 1 MHz 頻帶中最大功率頻譜密度不能超過 17 dBm。
- 使用超過 6 dBi 方向增益之發射天線時，應依超過 6 dBi 天線方向增益的 dBi 總量，等量減少最大傳導輸出功率及最大功率頻譜密度。

(3) 供固定式點對點操作使用:

- 在任何 1 MHz 頻帶中最大功率頻譜密度不能超過 17 dBm。
- 使用超過 23 dBi 方向增益之指向性天線時，應依超過 23 dBi 天線方向增益的 dBi 總量，等量減少最大傳導輸出功率及最大功率頻譜密度。
- 固定式點對點操作，不包括點對多點系統、全方向性應用及多台共站發射機傳送相同資訊。

(4) 供行動或可攜式裝置操作使用:

- 在任何 1 MHz 頻帶中最大功率頻譜密度不能超過 11 dBm。
- 使用超過 6 dBi 方向增益之發射天線時，應依超過 6 dBi 天線方向增益的 dBi 總量，等量減少最大傳導輸出功率及最大功率頻譜密度。

2. 5.25-5.35 GHz 與 5.470-5.725 GHz 頻帶

(1) 最大功率頻譜密度在任何 1 MHz 頻帶中不能超過 11 dBm。

(2) 使用超過 6 dBi 方向增益之發射天線時，應依超過 6 dBi 天線方向增益的 dBi 總量，等量減少最大傳導輸出功率及最大功率頻譜密度。

3. 5.725-5.850 GHz 頻帶

(1) 在任何 500 kHz 頻帶中最大功率頻譜密度不能超過 30 dBm。

(2) 供固定式點對點操作時，使用方向增益超過 6 dBi 之發射天線，可不需對應減少發射器之傳導輸出功率限制值。

(3) 除(2)外，使用超過 6 dBi 方向增益之發射天線時，應依超過 6 dBi 天線方向增益的 dBi 總量，等量減少最大傳導輸出功率及最大功率頻譜密度。

4. 最大功率頻譜密度量測規定:

(1) 應將量測儀器直接連接待測物，以傳導方式執行。

(2) 5.15 GHz~5.25 GHz、5.25 GHz~5.35 GHz 及 5.47 GHz~5.725 GHz 頻帶，量測儀器之頻寬應設定為 1 MHz 頻寬或待測物之 26 dB 發射頻寬，兩者取較小者。


(3) 5.725 GHz~5.850 GHz 頻帶，量測器之頻寬應設定為 500 kHz 或待測物之 26 dB 發射頻寬，兩者取較小者。

(4) 解析頻寬小於(2)或(3)時，應以補償方式計算總功率頻譜密度。

IEEE 802.11ac 20 MHz / IEEE 802.11ac 40 MHz / IEEE 802.11ac 80 MHz / IEEE 802.11ac 160 MHz

* Directional Gain = $10 \cdot \log\{[10^{(G1/20)} + 10^{(G2/20)} + \dots + 10^{(Gn/20)}]^2 / NANT\} = 4.01 \text{ dBi} < 6 \text{ dBi}$

測試架構圖：

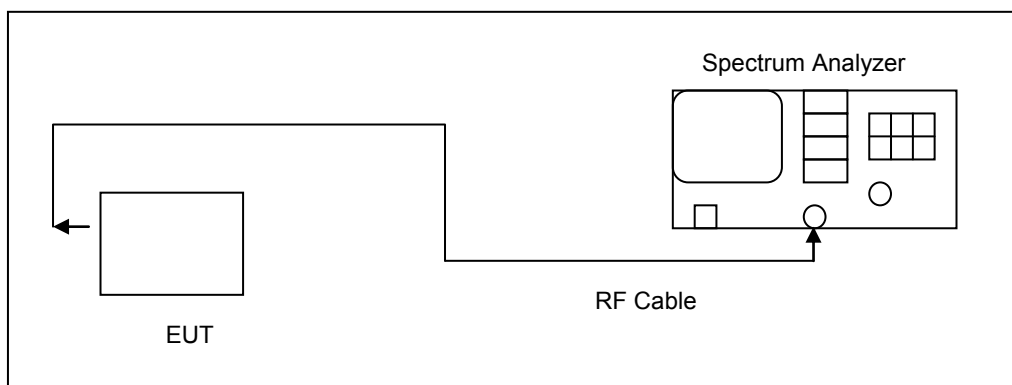

測試結果:

操作模式	: Mode 6 / Mode 9 / Mode 10 / Mode 11 / Mode 12
測試結果	: 合格

ANT-0						
操作模式	頻道 (CH)	頻率 (MHz)	量測值 (dBm/MHz)	Duty Factor (dB)	轉換值 (dBm/MHz)	限制值 (dBm/MHz)
Mode 6	36	5180.0	0.165	0.063	0.228	11
	40	5200.0	-0.083	0.063	-0.020	11
	48	5240.0	0.360	0.063	0.423	11
	52	5260.0	0.375	0.063	0.438	11
	56	5280.0	0.406	0.063	0.469	11
	64	5320.0	0.207	0.063	0.270	11
	100	5500.0	-0.720	0.063	-0.657	11
	112	5560.0	-0.997	0.063	-0.934	11
	140	5700.0	-0.549	0.063	-0.486	11

ANT-0						
操作模式	頻道 (CH)	頻率 (MHz)	量測值 (dBm/100 kHz)	Duty Factor (dB)	轉換值 (dBm/500 kHz)	限制值 (dBm/500 kHz)
Mode 6	149	5745.0	-8.84	0.063	-1.79	30
	157	5785.0	-8.98	0.063	-1.93	30
	165	5825.0	-8.48	0.063	-1.43	30

Note: Power Density = measured result + 10 log (1/duty cycle) + Conversion ratio = measured result + duty factory.

Conversion ration = 10*Log(500 k/100 k)

操作模式	: Mode 6 / Mode 9 / Mode 10 / Mode 11 / Mode 12
測試結果	: 合格

ANT-0						
操作模式	頻道 (CH)	頻率 (MHz)	量測值 (dBm/MHz)	Duty Factor (dB)	轉換值 (dBm/MHz)	限制值 (dBm/MHz)
Mode 9	36	5180.0	-3.363	0.685	-2.678	11
	40	5200.0	-3.178	0.685	-2.493	11
	48	5240.0	-2.720	0.685	-2.035	11
	52	5260.0	-3.045	0.685	-2.360	11
	56	5280.0	-3.273	0.685	-2.588	11
	64	5320.0	-3.293	0.685	-2.608	11
	100	5500.0	-3.265	0.685	-2.580	11
	112	5560.0	-3.403	0.685	-2.718	11
	140	5700.0	-3.603	0.685	-2.918	11
ANT-1						
操作模式	頻道 (CH)	頻率 (MHz)	量測值 (dBm/MHz)	Duty Factor (dB)	轉換值 (dBm/MHz)	限制值 (dBm/MHz)
Mode 9	36	5180.0	-3.933	0.685	-3.248	11
	40	5200.0	-3.356	0.685	-2.671	11
	48	5240.0	-3.307	0.685	-2.622	11
	52	5260.0	-3.122	0.685	-2.437	11
	56	5280.0	-3.618	0.685	-2.933	11
	64	5320.0	-3.357	0.685	-2.672	11
	100	5500.0	-4.051	0.685	-3.366	11
	112	5560.0	-4.326	0.685	-3.641	11
	140	5700.0	-4.262	0.685	-3.577	11
ANT-0+1						
操作模式	頻道 (CH)	頻率 (MHz)	轉換值 (dBm/MHz)		限制值 (dBm/MHz)	
Mode 9	36	5180.0	0.057		11	
	40	5200.0	0.429		11	
	48	5240.0	0.692		11	
	52	5260.0	0.612		11	
	56	5280.0	0.253		11	
	64	5320.0	0.370		11	
	100	5500.0	0.055		11	
	112	5560.0	-0.145		11	
	140	5700.0	-0.225		11	

Note: Power Density = measured result + 10 log (1/duty cycle) + Conversion ratio = measured result + duty factory.

Conversion ratio = 10*Log(500 k/100 k)

操作模式	: Mode 6 / Mode 9 / Mode 10 / Mode 11 / Mode 12
測試結果	: 合格

ANT-0						
操作模式	頻道 (CH)	頻率 (MHz)	量測值 (dBm/100 kHz)	Duty Factor (dB)	轉換值 (dBm/500 kHz)	限制值 (dBm/500 kHz)
Mode 9	149	5745.0	-12.63	0.685	-4.95	30
	157	5785.0	-11.93	0.685	-4.26	30
	165	5825.0	-12.08	0.685	-4.41	30
ANT-1						
操作模式	頻道 (CH)	頻率 (MHz)	量測值 (dBm/100 kHz)	Duty Factor (dB)	轉換值 (dBm/500 kHz)	限制值 (dBm/500 kHz)
Mode 9	149	5745.0	-12.29	0.685	-4.62	30
	157	5785.0	-12.72	0.685	-5.05	30
	165	5825.0	-12.31	0.685	-4.64	30
ANT-0+1						
操作模式	頻道 (CH)	頻率 (MHz)	轉換值 (dBm/500 kHz)		限制值 (dBm/500 kHz)	
Mode 9	149	5745.0	-1.771		30	
	157	5785.0	-1.624		30	
	165	5825.0	-1.511		30	

Note: Power Density = measured result + 10 log (1/duty cycle) + Conversion ratio = measured result + duty factory.

Conversion ration = 10*Log(500 k/100 k)

操作模式	: Mode 6 / Mode 9 / Mode 10 / Mode 11 / Mode 12
測試結果	: 合格

ANT-0						
操作模式	頻道 (CH)	頻率 (MHz)	量測值 (dBm/MHz)	Duty Factor (dB)	轉換值 (dBm/MHz)	限制值 (dBm/MHz)
Mode 10	38	5190.0	-7.735	0.640	-7.095	11
	46	5230.0	-7.304	0.640	-6.664	11
	54	5270.0	-7.651	0.640	-7.011	11
	62	5310.0	-7.821	0.640	-7.181	11
	102	5510.0	-6.973	0.640	-6.333	11
	110	5550.0	-7.261	0.640	-6.621	11
	134	5670.0	-6.924	0.640	-6.284	11
ANT-1						
操作模式	頻道 (CH)	頻率 (MHz)	量測值 (dBm/MHz)	Duty Factor (dB)	轉換值 (dBm/MHz)	限制值 (dBm/MHz)
Mode 10	38	5190.0	-8.739	0.640	-8.099	11
	46	5230.0	-8.585	0.640	-7.945	11
	54	5270.0	-8.274	0.640	-7.634	11
	62	5310.0	-8.453	0.640	-7.813	11
	102	5510.0	-7.648	0.640	-7.008	11
	110	5550.0	-7.702	0.640	-7.062	11
	134	5670.0	-7.645	0.640	-7.005	11
ANT-0+1						
操作模式	頻道 (CH)	頻率 (MHz)	轉換值 (dBm/MHz)		限制值 (dBm/MHz)	
Mode 10	38	5190.0	-4.558		11	
	46	5230.0	-4.247		11	
	54	5270.0	-4.301		11	
	62	5310.0	-4.475		11	
	102	5510.0	-3.647		11	
	110	5550.0	-3.825		11	
	134	5670.0	-3.619		11	

Note: Power Density = measured result + 10 log (1/duty cycle) + Conversion ratio = measured result + duty factory.

Conversion ration = 10*Log(500 k/100 k)

操作模式	: Mode 6 / Mode 9 / Mode 10 / Mode 11 / Mode 12
測試結果	: 合格

ANT-0						
操作模式	頻道 (CH)	頻率 (MHz)	量測值 (dBm/100 kHz)	Duty Factor (dB)	轉換值 (dBm/500 kHz)	限制值 (dBm/500 kHz)
Mode 10	151	5755.0	-15.29	0.640	-7.66	30
	159	5795.0	-13.97	0.640	-6.34	30
ANT-1						
操作模式	頻道 (CH)	頻率 (MHz)	量測值 (dBm/100 kHz)	Duty Factor (dB)	轉換值 (dBm/500 kHz)	限制值 (dBm/500 kHz)
Mode 10	151	5755.0	-15.84	0.640	-8.21	30
	159	5795.0	-15.37	0.640	-7.74	30
ANT-0+1						
操作模式	頻道 (CH)	頻率 (MHz)	轉換值 (dBm/500 kHz)		限制值 (dBm/500 kHz)	
Mode 10	151	5755.0	-4.917		30	
	159	5795.0	-3.969		30	

ANT-0						
操作模式	頻道 (CH)	頻率 (MHz)	量測值 (dBm/MHz)	Duty Factor (dB)	轉換值 (dBm/MHz)	限制值 (dBm/MHz)
Mode 11	42	5210.0	-8.164	0.674	-7.490	11
	58	5290.0	-8.922	0.674	-8.248	11
	106	5530.0	-9.545	0.674	-8.871	11
	122	5610.0	-9.342	0.674	-8.668	11
ANT-1						
操作模式	頻道 (CH)	頻率 (MHz)	量測值 (dBm/MHz)	Duty Factor (dB)	轉換值 (dBm/MHz)	限制值 (dBm/MHz)
Mode 11	42	5210.0	-9.113	0.674	-8.439	11
	58	5290.0	-9.071	0.674	-8.397	11
	106	5530.0	-10.343	0.674	-9.669	11
	122	5610.0	-9.600	0.674	-8.926	11
ANT-0+1						
操作模式	頻道 (CH)	頻率 (MHz)	轉換值 (dBm/MHz)		限制值 (dBm/MHz)	
Mode 11	42	5210.0	-4.928		11	
	58	5290.0	-5.311		11	
	106	5530.0	-6.241		11	
	122	5610.0	-5.785		11	

Note: Power Density = measured result + 10 log (1/duty cycle) + Conversion ratio = measured result + duty factory.

Conversion ration = 10*Log(500 k/100 k)

操作模式	: Mode 6 / Mode 9 / Mode 10 / Mode 11 / Mode 12
測試結果	: 合格

ANT-0						
操作模式	頻道 (CH)	頻率 (MHz)	量測值 (dBm/100 kHz)	Duty Factor (dB)	轉換值 (dBm/500 kHz)	限制值 (dBm/500 kHz)
Mode 11	155	5775.0	-16.87	0.674	-9.21	30
ANT-1						
操作模式	頻道 (CH)	頻率 (MHz)	量測值 (dBm/100 kHz)	Duty Factor (dB)	轉換值 (dBm/500 kHz)	限制值 (dBm/500 kHz)
Mode 11	155	5775.0	-17.52	0.674	-9.86	30
ANT-0+1						
操作模式	頻道 (CH)	頻率 (MHz)	轉換值 (dBm/500 kHz)		限制值 (dBm/500 kHz)	
Mode 11	155	5775.0	-6.508		30	

ANT-0						
操作模式	頻道 (CH)	頻率 (MHz)	量測值 (dBm/MHz)	Duty Factor (dB)	轉換值 (dBm/MHz)	限制值 (dBm/MHz)
Mode 12	50	5250.0	-11.223	0.969	-10.549	11
	114	5570.0	-12.838	0.969	-12.164	11
ANT-1						
操作模式	頻道 (CH)	頻率 (MHz)	量測值 (dBm/MHz)	Duty Factor (dB)	轉換值 (dBm/MHz)	限制值 (dBm/MHz)
Mode 12	50	5250.0	-11.342	0.969	-10.668	11
	114	5570.0	-13.509	0.969	-12.835	11
ANT-0+1						
操作模式	頻道 (CH)	頻率 (MHz)	轉換值 (dBm/MHz)		限制值 (dBm/MHz)	
Mode 12	50	5250.0	-7.598		11	
	114	5570.0	-9.476		11	

Note: Power Density = measured result + 10 log (1/duty cycle) + Conversion ratio = measured result + duty factory.

Conversion ration = 10*Log(500 k/100 k)

