


測試頻道: IEEE 802.11a / 5745 MHz
 解析頻寬: 1000 kHz / 1000 kHz
 量測天線: Horn Antenna
 檢測器: Peak/AV
 環境溫度: 25°C

測試模式: 發射
 視頻頻寬: 1000 kHz / 10 Hz
 測試距離: 3 米
 測試日期: 107/05/03
 環境濕度: 62%

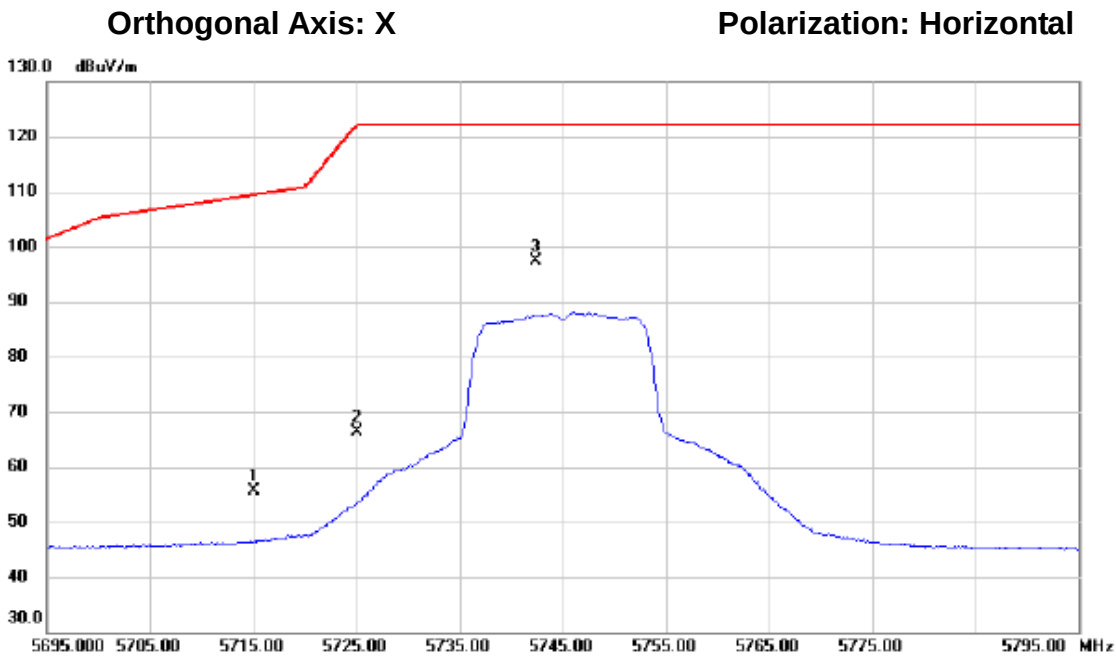

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5715.000	16.78	38.91	55.69	109.40	-53.71	peak	
2		5725.000	27.42	38.93	66.35	122.20	-55.85	peak	
3	*	5742.450	58.43	38.96	97.39	122.20	-24.81	peak	

測試頻道: IEEE 802.11a / 5745 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢測器: Peak/AV

環境溫度: 25°C

測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz


測試距離: 3 米

測試日期: 107/05/03

環境濕度: 62%

Orthogonal Axis: X

Polarization: Horizontal

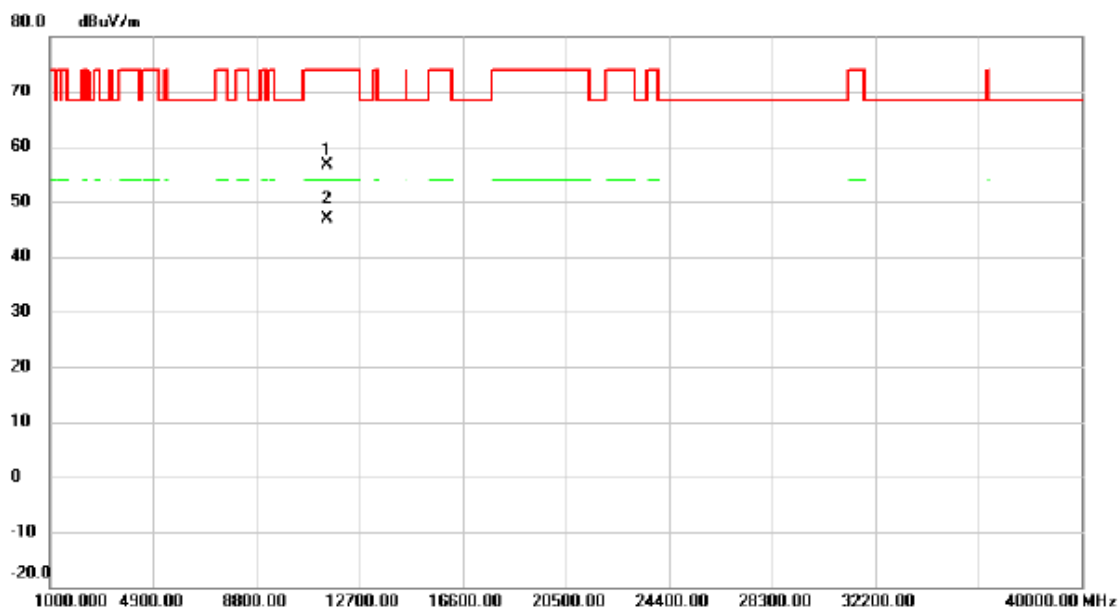


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11488.800	40.01	16.73	56.74	74.00	-17.26	peak	
2 *		11491.250	30.03	16.74	46.77	54.00	-7.23	AVG	

測試頻道: IEEE 802.11a / 5785 MHz
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢測器: Peak/AV
環境溫度: 25°C

測試模式: 發射
視頻頻寬: 1000 kHz / 10 Hz
測試距離: 3 米
測試日期: 107/05/03
環境濕度: 62%

Orthogonal Axis: X


Polarization: Vertical

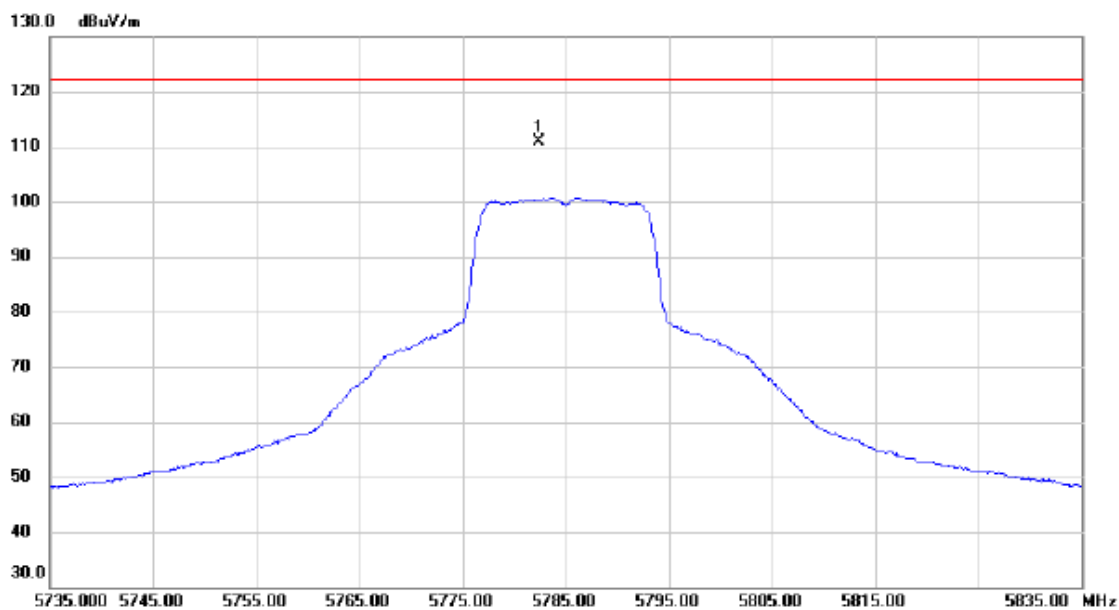

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	5782.350	71.82	39.03	110.85	122.20	-11.35	peak	

測試頻道: IEEE 802.11a / 5785 MHz
 解析頻寬: 1000 kHz / 1000 kHz
 量測天線: Horn Antenna
 檢測器: Peak/AV
 環境溫度: 25°C


測試模式: 發射
 視頻頻寬: 1000 kHz / 10 Hz
 測試距離: 3 米
 測試日期: 107/05/03
 環境濕度: 62%

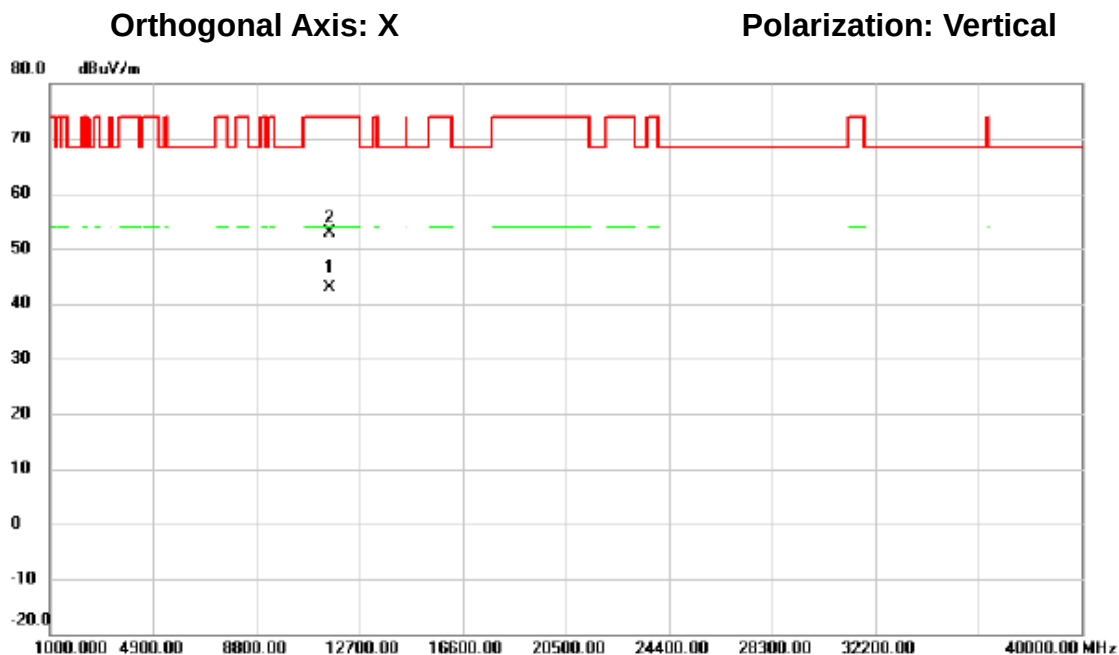

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1 *		11571.850	26.31	16.54	42.85	54.00	-11.15	AVG	
2		11573.650	36.30	16.54	52.84	74.00	-21.16	peak	

測試頻道: IEEE 802.11a / 5785 MHz
 解析頻寬: 1000 kHz / 1000 kHz
 量測天線: Horn Antenna
 檢測器: Peak/AV
 環境溫度: 25°C


測試模式: 發射
 視頻頻寬: 1000 kHz / 10 Hz
 測試距離: 3 米
 測試日期: 107/05/03
 環境濕度: 62%

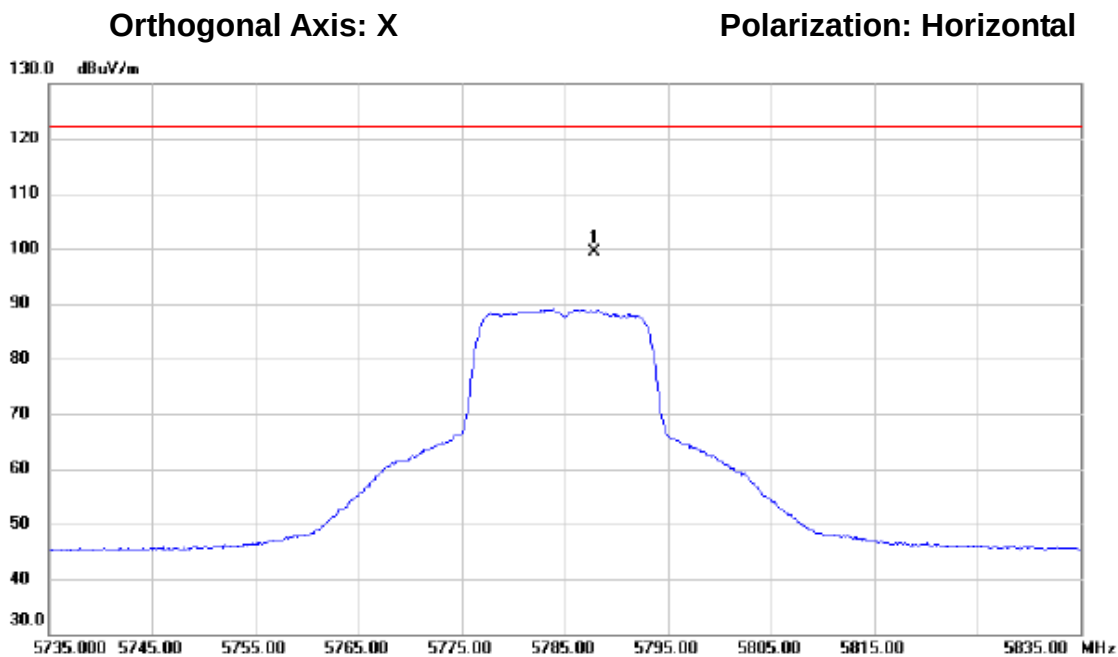

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	5787.800	60.30	39.05	99.35	122.20	-22.85	peak	

測試頻道: IEEE 802.11a / 5785 MHz
 解析頻寬: 1000 kHz / 1000 kHz
 量測天線: Horn Antenna
 檢測器: Peak/AV
 環境溫度: 25°C


測試模式: 發射
 視頻頻寬: 1000 kHz / 10 Hz
 測試距離: 3 米
 測試日期: 107/05/03
 環境濕度: 62%

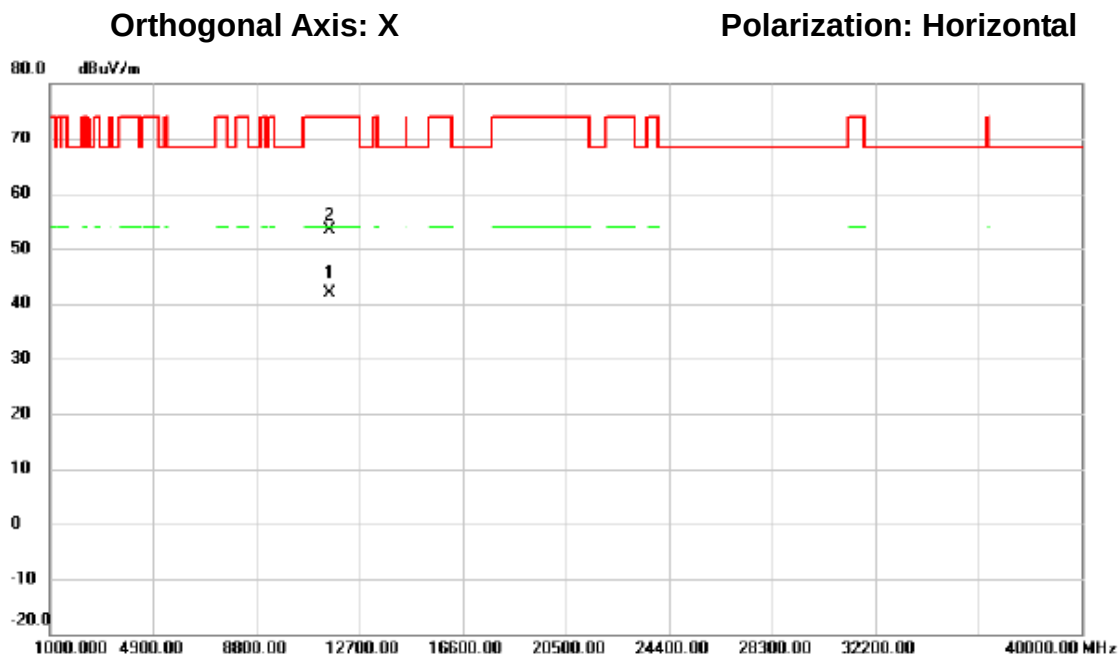

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1 *		11567.450	25.42	16.55	41.97	54.00	-12.03	AVG	
2		11568.050	36.78	16.55	53.33	74.00	-20.67	peak	

測試頻道: IEEE 802.11a / 5825 MHz
 解析頻寬: 1000 kHz / 1000 kHz
 量測天線: Horn Antenna
 檢測器: Peak/AV
 環境溫度: 25°C


測試模式: 發射
 視頻頻寬: 1000 kHz / 10 Hz
 測試距離: 3 米
 測試日期: 107/05/03
 環境濕度: 62%

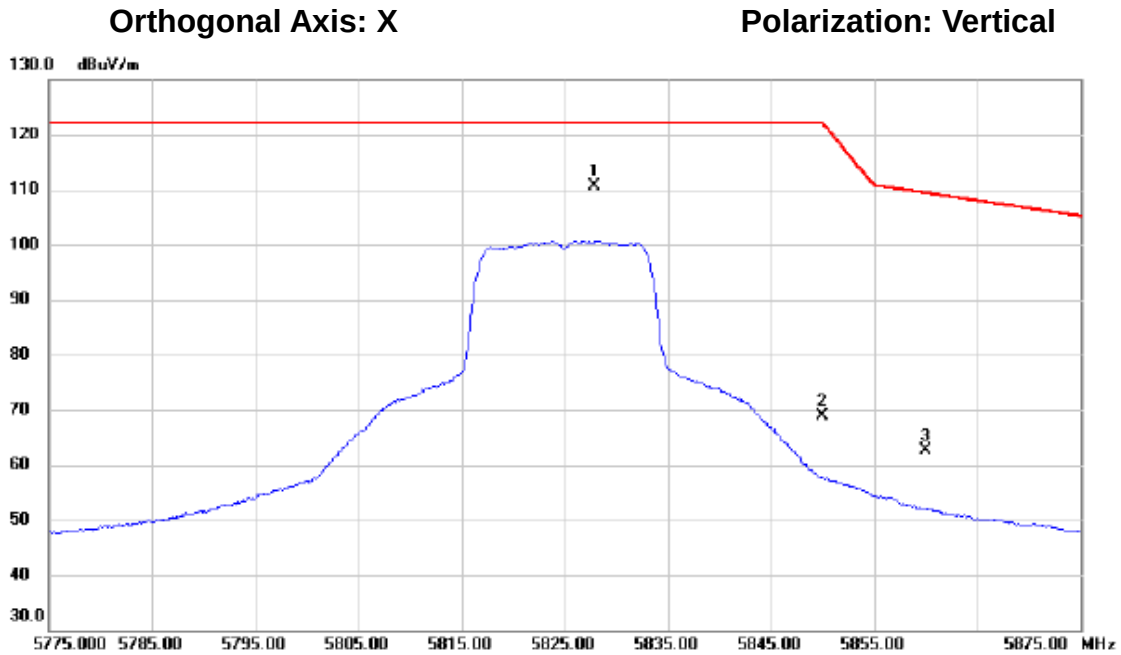

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	5827.800	71.50	39.13	110.63	122.20	-11.57	peak	
2		5850.000	29.78	39.17	68.95	122.20	-53.25	peak	
3		5860.000	23.44	39.18	62.62	109.40	-46.78	peak	

測試頻道: IEEE 802.11a / 5825 MHz
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢測器: Peak/AV
環境溫度: 25°C

測試模式: 發射
視頻頻寬: 1000 kHz / 10 Hz
測試距離: 3 米
測試日期: 107/05/03
環境濕度: 62%

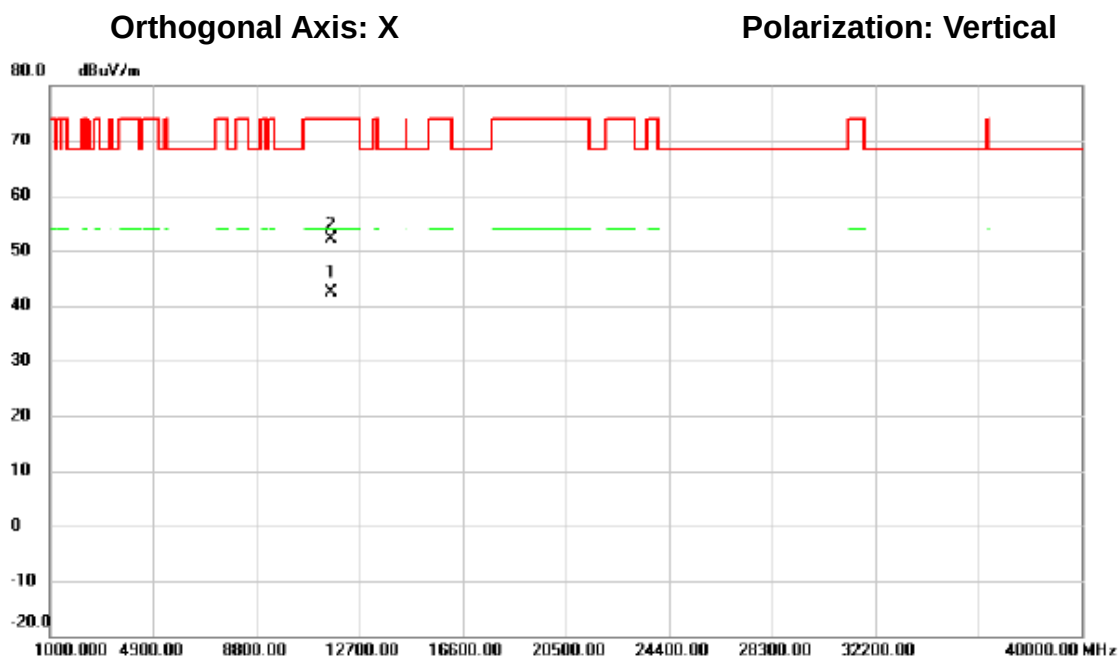


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	11651.250	26.17	16.32	42.49	54.00	-11.51	AVG	
2		11656.000	35.84	16.30	52.14	74.00	-21.86	peak	

測試頻道: IEEE 802.11a / 5825 MHz
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢測器: Peak/AV
環境溫度: 25°C

測試模式: 發射
視頻頻寬: 1000 kHz / 10 Hz
測試距離: 3 米
測試日期: 107/05/03
環境濕度: 62%

Orthogonal Axis: X

Polarization: Horizontal

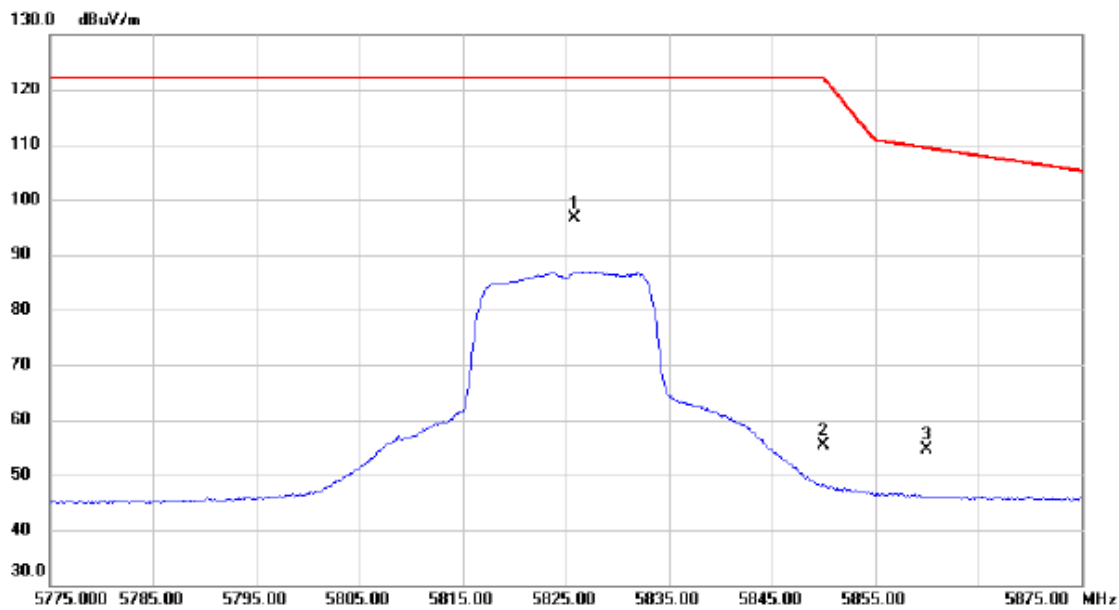

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	5825.900	57.49	39.12	96.61	122.20	-25.59	peak	
2		5850.000	16.13	39.17	55.30	122.20	-66.90	peak	
3		5860.000	15.52	39.18	54.70	109.40	-54.70	peak	

測試頻道: IEEE 802.11a / 5825 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢測器: Peak/AV

環境溫度: 25°C

測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz


測試距離: 3 米

測試日期: 107/05/03

環境濕度: 62%


Orthogonal Axis: X

Polarization: Horizontal

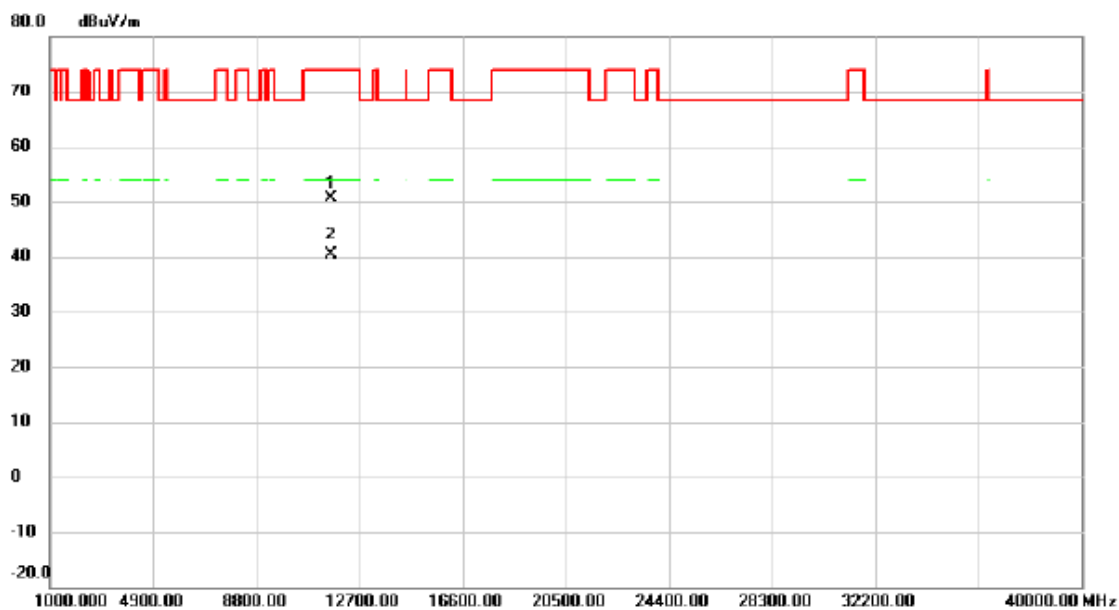


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11651.600	34.34	16.32	50.66	74.00	-23.34	peak	
2	*	11651.650	24.02	16.32	40.34	54.00	-13.66	AVG	

測試頻道: IEEE 802.11n(20M) / 5745 MHz 測試模式: 發射
 解析頻寬: 1000 kHz / 1000 kHz 視頻頻寬: 1000 kHz / 10 Hz
 量測天線: Horn Antenna 測試距離: 3 米
 檢測器: Peak/AV 測試日期: 107/05/03
 環境溫度: 25°C 環境濕度: 62%

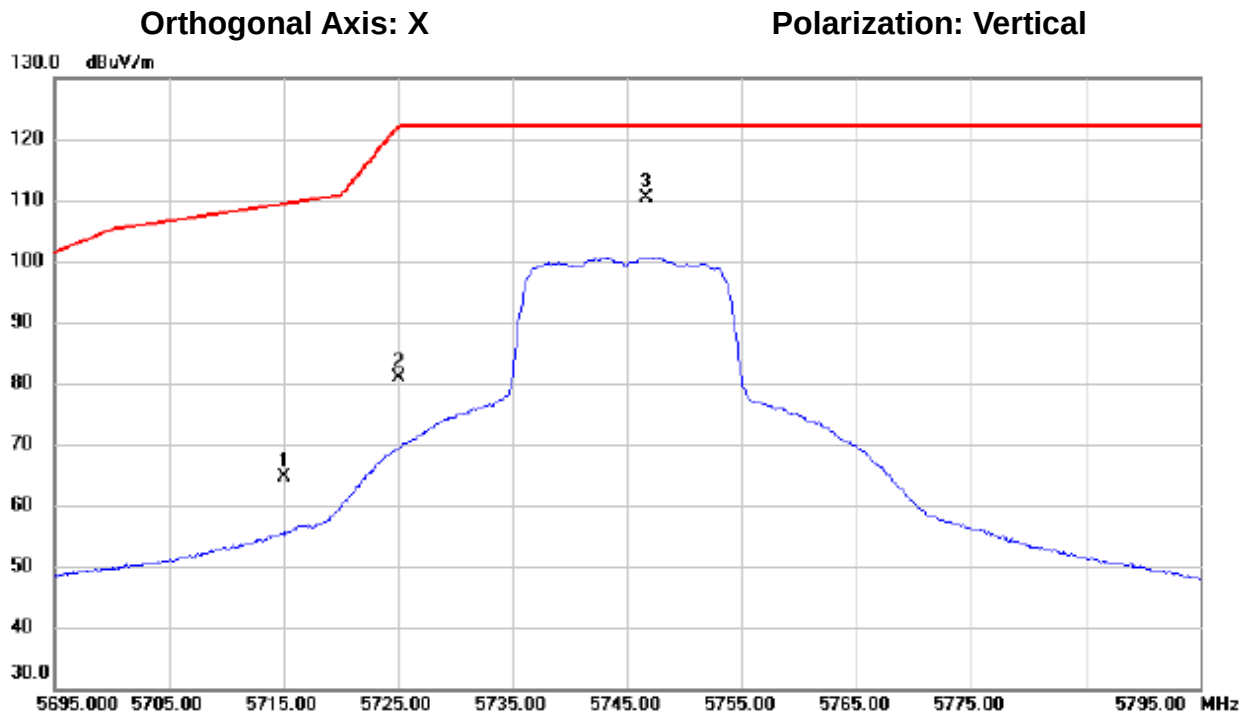


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5715.000	25.80	38.91	64.71	109.40	-44.69	peak	
2		5725.000	42.03	38.93	80.96	122.20	-41.24	peak	
3 *		5746.700	71.40	38.97	110.37	122.20	-11.83	peak	

測試頻道: IEEE 802.11n(20M) / 5745 MHz 測試模式: 發射
 解析頻寬: 1000 kHz / 1000 kHz 視頻頻寬: 1000 kHz / 10 Hz
 量測天線: Horn Antenna 測試距離: 3 米
 檢測器: Peak/AV 測試日期: 107/05/03
 環境溫度: 25°C 環境濕度: 62%

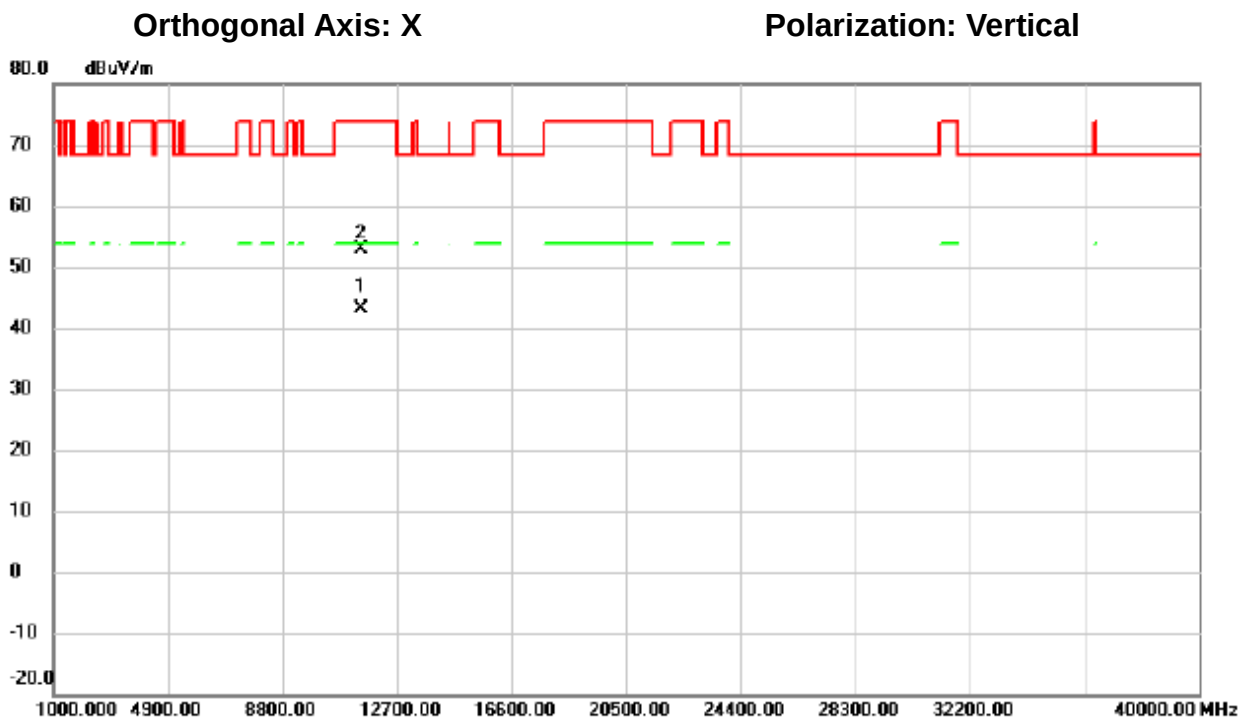


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	11488.250	26.29	16.73	43.02	54.00	-10.98	AVG	
2		11496.600	36.13	16.75	52.88	74.00	-21.12	peak	

測試頻道: IEEE 802.11n(20M) / 5745 MHz 測試模式: 發射
 解析頻寬: 1000 kHz / 1000 kHz 視頻頻寬: 1000 kHz / 10 Hz
 量測天線: Horn Antenna 測試距離: 3 米
 檢測器: Peak/AV 測試日期: 107/05/03
 環境溫度: 25°C 環境濕度: 62%

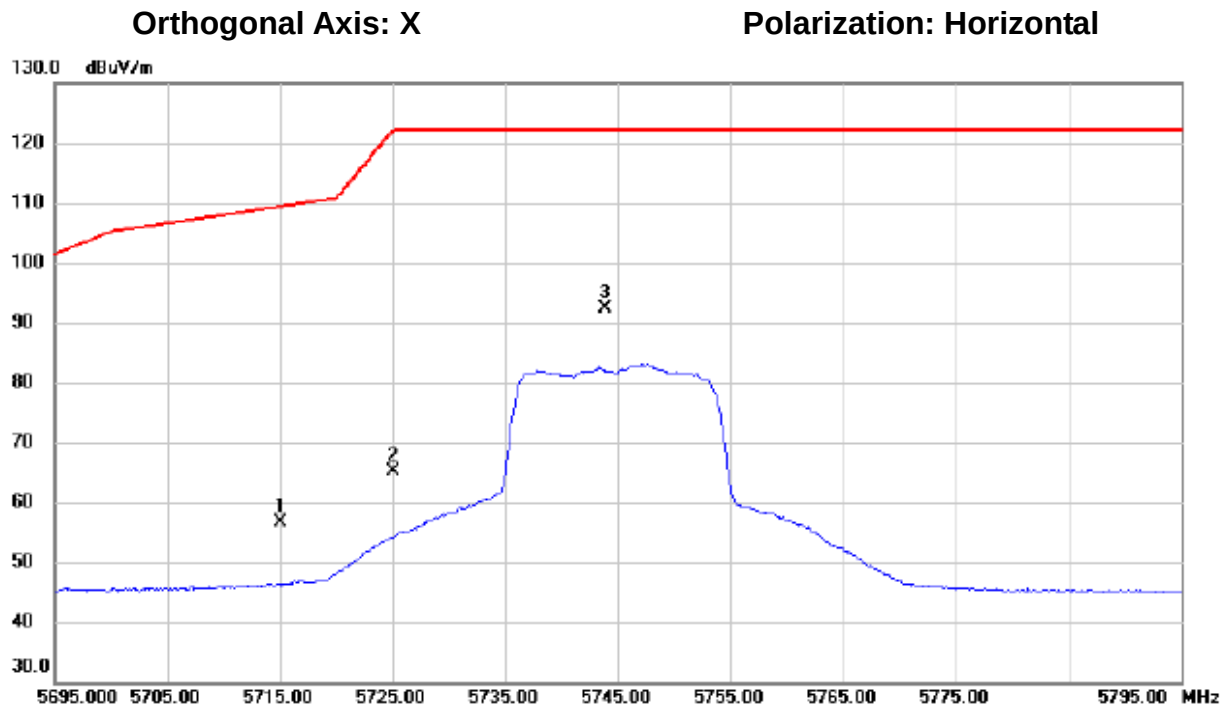


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5715.000	17.76	38.91	56.67	109.40	-52.73	peak	
2		5725.000	26.29	38.93	65.22	122.20	-56.98	peak	
3	*	5743.900	53.42	38.96	92.38	122.20	-29.82	peak	

測試頻道: IEEE 802.11n(20M) / 5745 MHz 測試模式: 發射
 解析頻寬: 1000 kHz / 1000 kHz 視頻頻寬: 1000 kHz / 10 Hz
 量測天線: Horn Antenna 測試距離: 3 米
 檢測器: Peak/AV 測試日期: 107/05/03
 環境溫度: 25°C 環境濕度: 62%

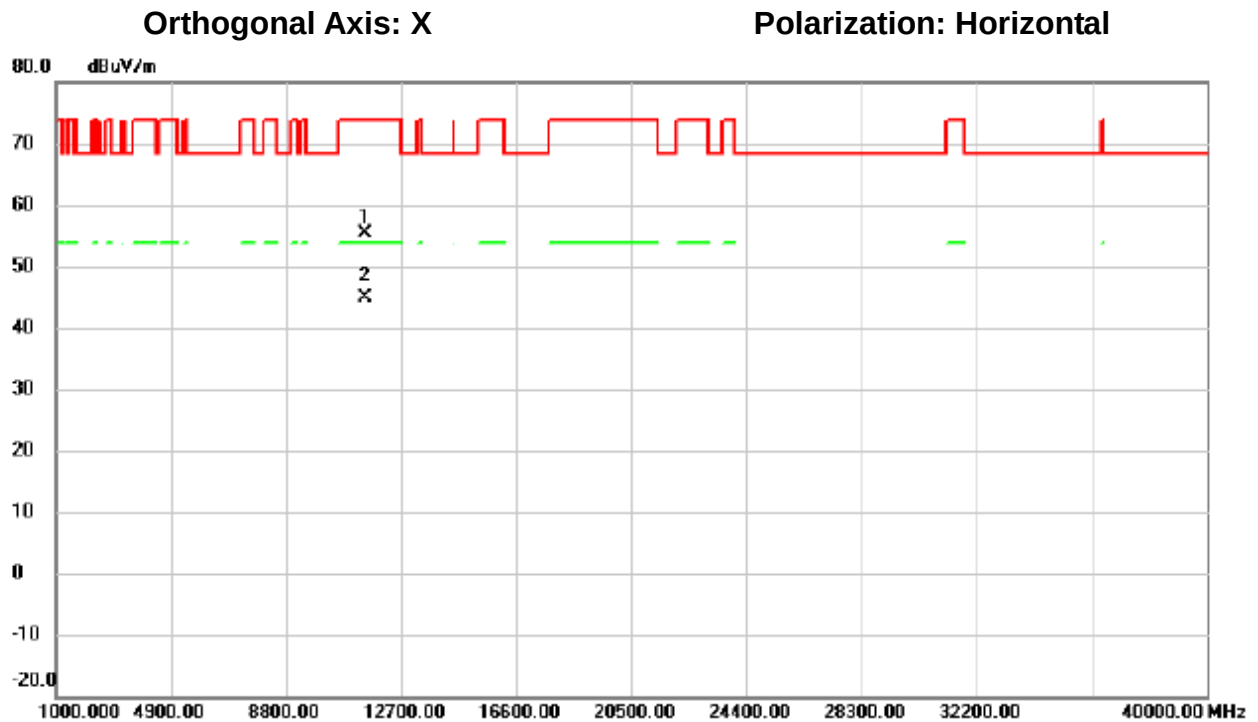


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11486.400	38.68	16.73	55.41	74.00	-18.59	peak	
2	*	11488.750	28.25	16.73	44.98	54.00	-9.02	AVG	

測試頻道: IEEE 802.11n(20M) / 5785 MHz 測試模式: 發射
解析頻寬: 1000 kHz / 1000 kHz 視頻頻寬: 1000 kHz / 10 Hz
量測天線: Horn Antenna 測試距離: 3 米
檢測器: Peak/AV 測試日期: 107/05/03
環境溫度: 25°C 環境濕度: 62%

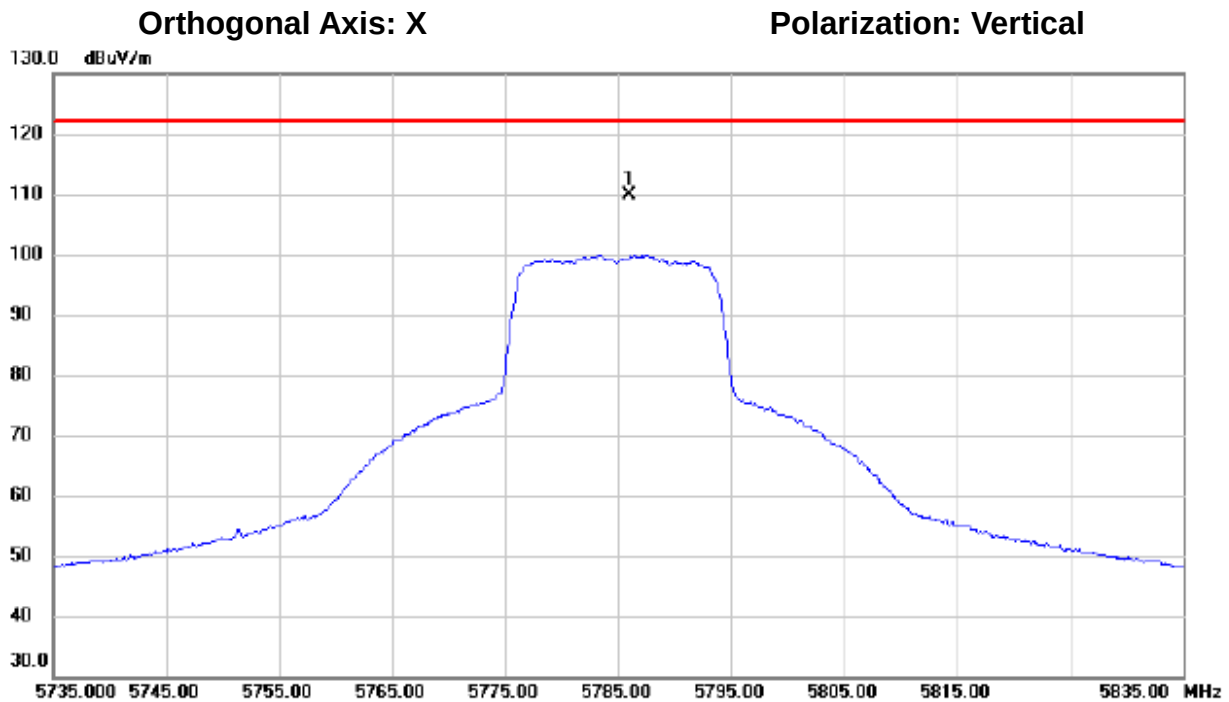

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	5786.050	70.90	39.05	109.95	122.20	-12.25	peak	

測試頻道: IEEE 802.11n(20M) / 5785 MHz	測試模式: 發射
解析頻寬: 1000 kHz / 1000 kHz	視頻頻寬: 1000 kHz / 10 Hz
量測天線: Horn Antenna	測試距離: 3 米
檢測器: Peak/AV	測試日期: 107/05/03
環境溫度: 25°C	環境濕度: 62%

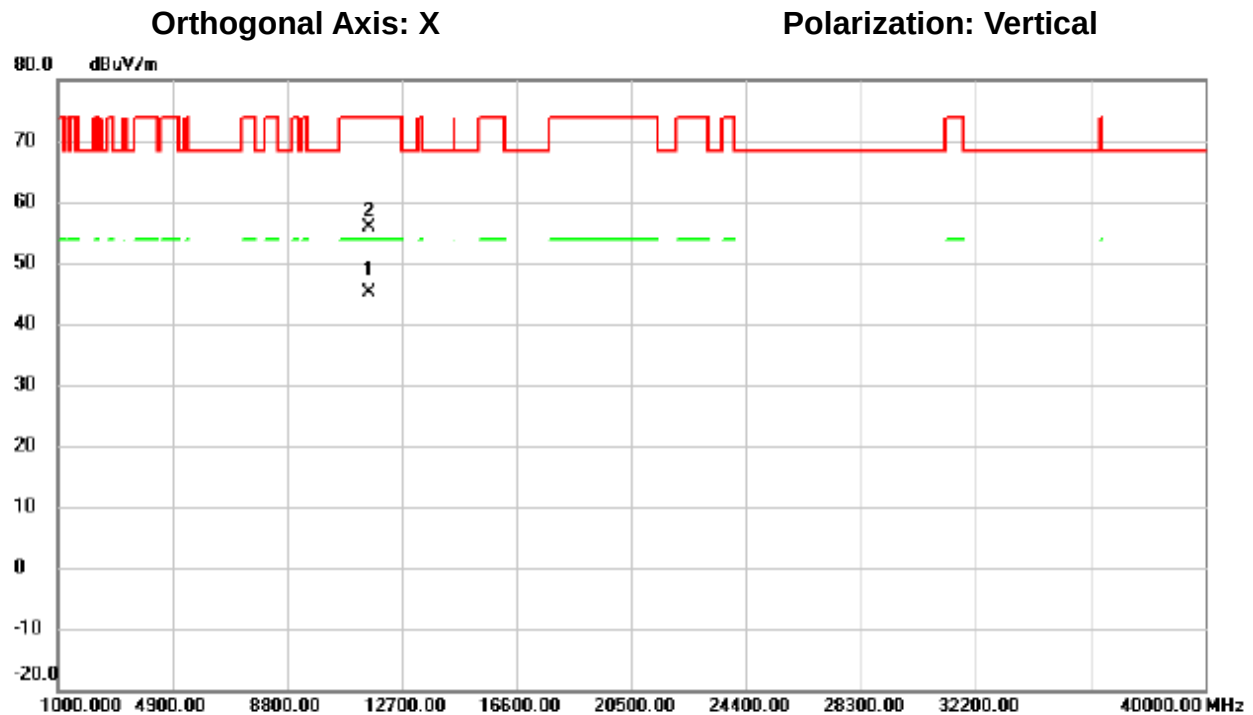


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	11568.750	28.65	16.55	45.20	54.00	-8.80	AVG	
2		11570.400	39.31	16.55	55.86	74.00	-18.14	peak	

測試頻道: IEEE 802.11n(20M) / 5785 MHz	測試模式: 發射
解析頻寬: 1000 kHz / 1000 kHz	視頻頻寬: 1000 kHz / 10 Hz
量測天線: Horn Antenna	測試距離: 3 米
檢測器: Peak/AV	測試日期: 107/05/03
環境溫度: 25°C	環境濕度: 62%


Orthogonal Axis: X

Polarization: Horizontal

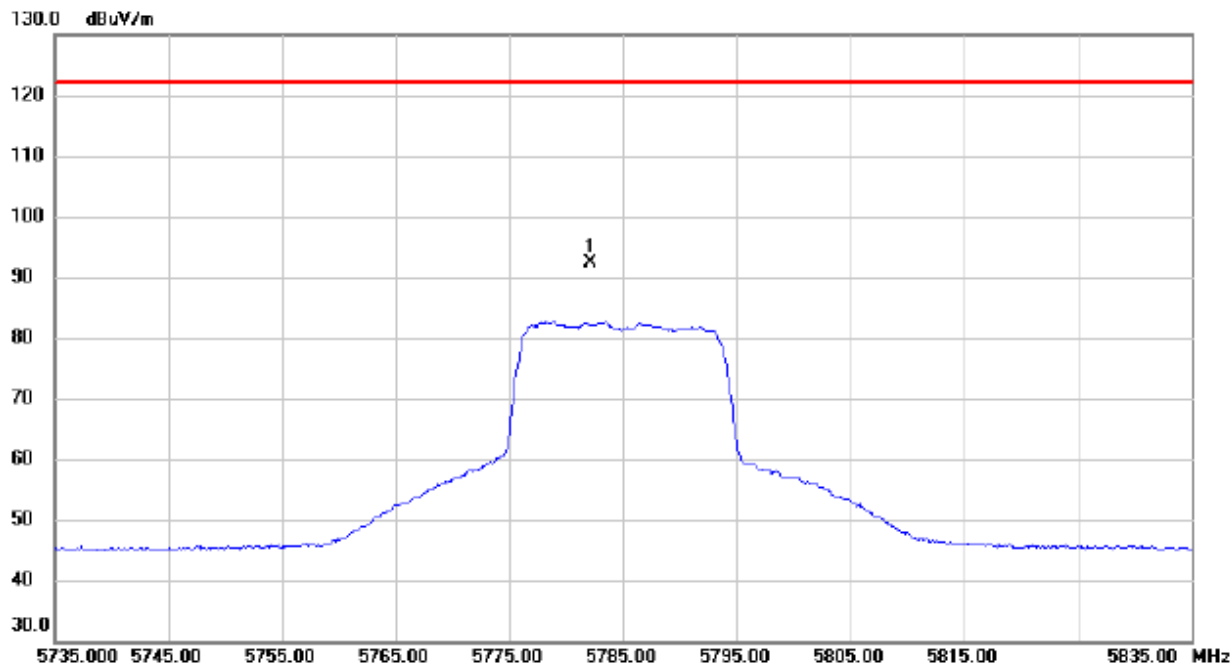


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	5782.200	53.44	39.03	92.47	122.20	-29.73	peak	

測試頻道: IEEE 802.11n(20M) / 5785 MHz 測試模式: 發射
解析頻寬: 1000 kHz / 1000 kHz 視頻頻寬: 1000 kHz / 10 Hz
量測天線: Horn Antenna 測試距離: 3 米
檢測器: Peak/AV 測試日期: 107/05/03
環境溫度: 25°C 環境濕度: 62%

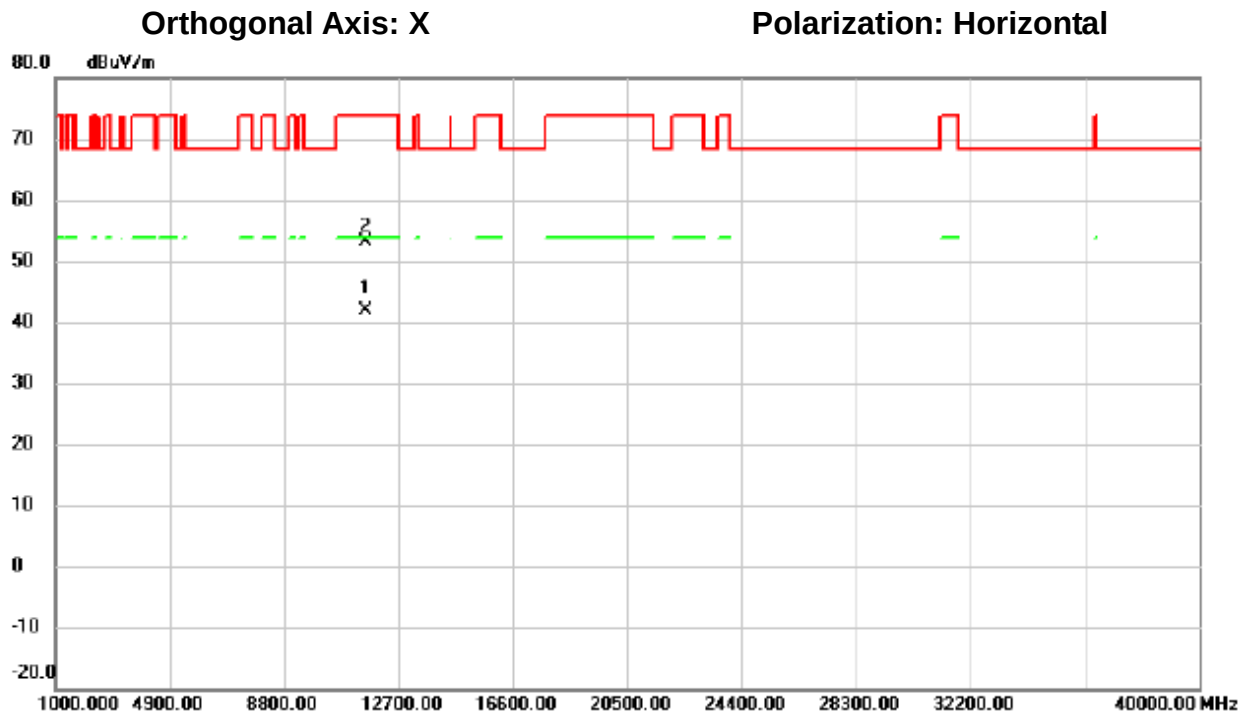


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	11564.400	25.37	16.56	41.93	54.00	-12.07	AVG	
2		11564.900	36.66	16.56	53.22	74.00	-20.78	peak	

測試頻道: IEEE 802.11n(20M) / 5825 MHz	測試模式: 發射
解析頻寬: 1000 kHz / 1000 kHz	視頻頻寬: 1000 kHz / 10 Hz
量測天線: Horn Antenna	測試距離: 3 米
檢測器: Peak/AV	測試日期: 107/05/03
環境溫度: 25°C	環境濕度: 62%

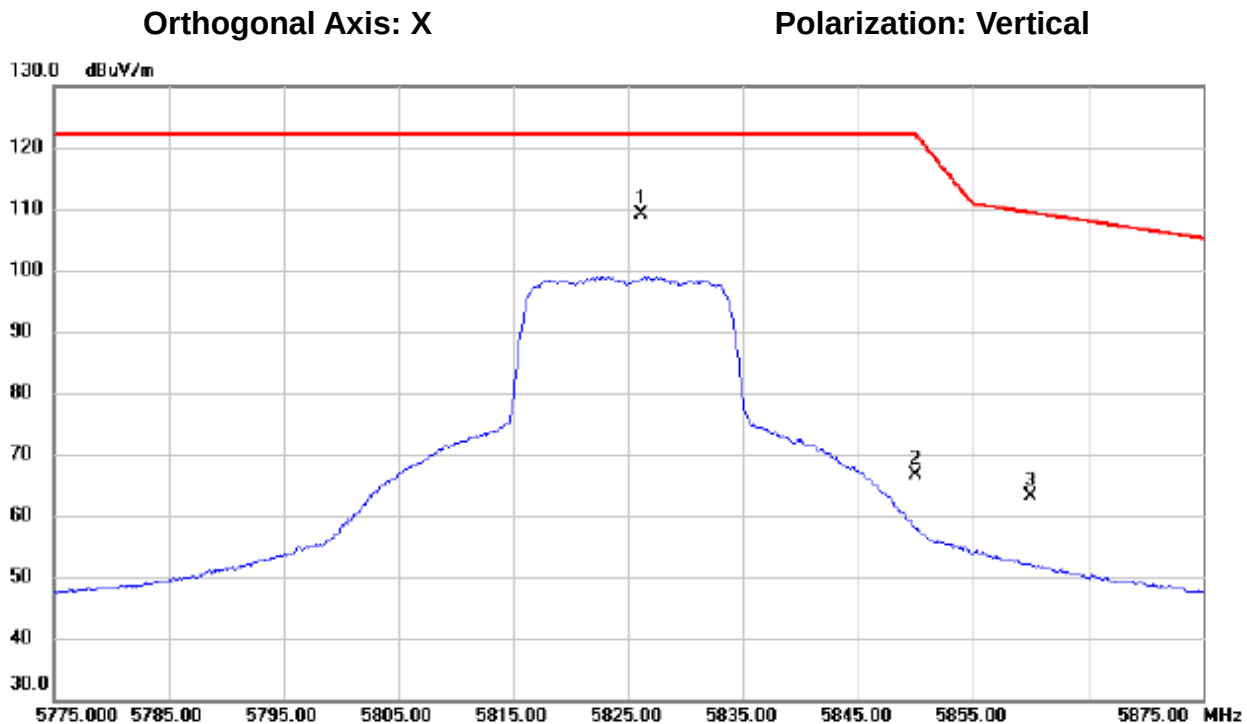


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	5826.200	70.01	39.12	109.13	122.20	-13.07	peak	
2		5850.000	27.44	39.17	66.61	122.20	-55.59	peak	
3		5860.000	24.03	39.18	63.21	109.40	-46.19	peak	

測試頻道: IEEE 802.11n(20M) / 5825 MHz 測試模式: 發射
解析頻寬: 1000 kHz / 1000 kHz 視頻頻寬: 1000 kHz / 10 Hz
量測天線: Horn Antenna 測試距離: 3 米
檢測器: Peak/AV 測試日期: 107/05/03
環境溫度: 25°C 環境濕度: 62%

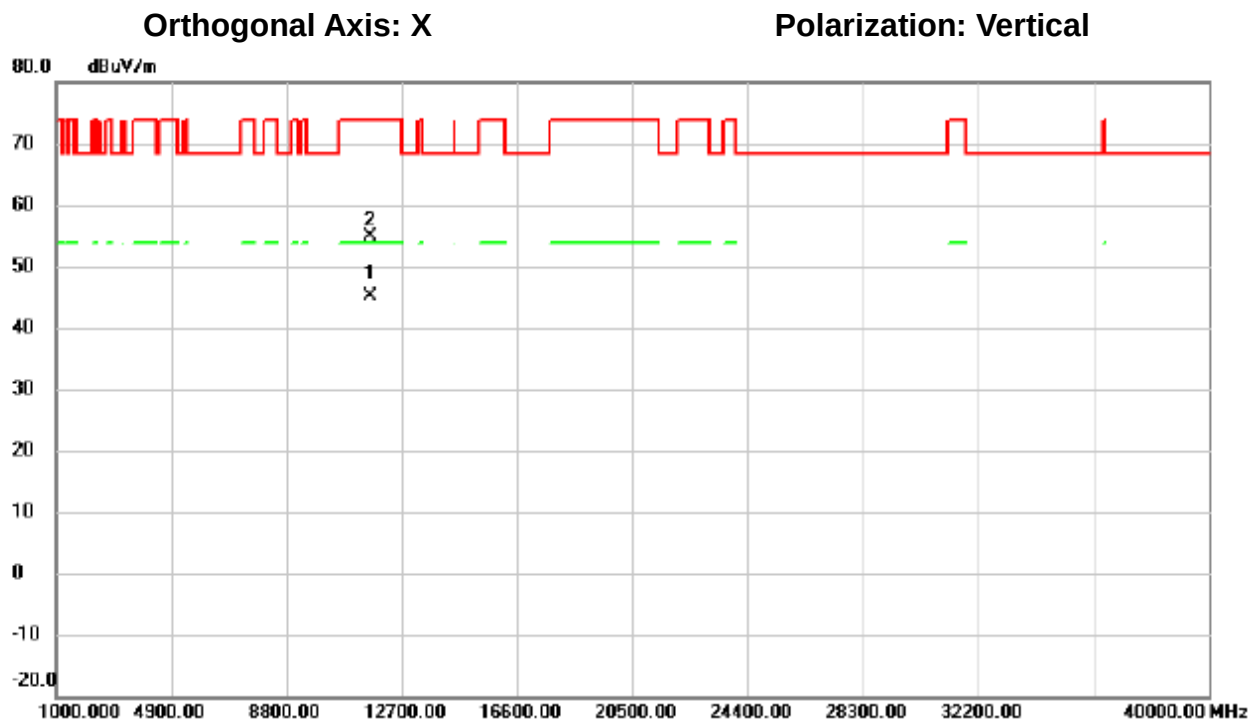


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	11649.100	28.91	16.32	45.23	54.00	-8.77	AVG	
2		11649.650	38.67	16.32	54.99	74.00	-19.01	peak	

測試頻道: IEEE 802.11n(20M) / 5825 MHz 測試模式: 發射
 解析頻寬: 1000 kHz / 1000 kHz 視頻頻寬: 1000 kHz / 10 Hz
 量測天線: Horn Antenna 測試距離: 3 米
 檢測器: Peak/AV 測試日期: 107/05/03
 環境溫度: 25°C 環境濕度: 62%

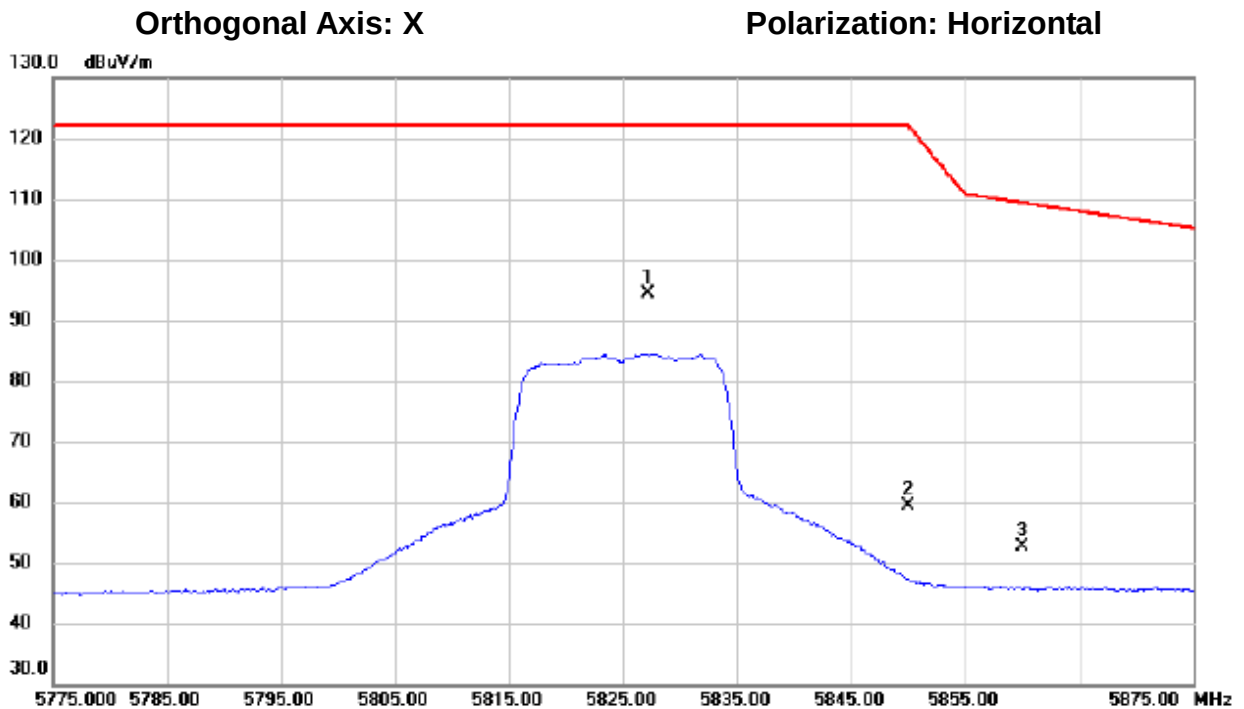


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	5827.250	55.18	39.12	94.30	122.20	-27.90	peak	
2		5850.000	20.13	39.17	59.30	122.20	-62.90	peak	
3		5860.000	13.47	39.18	52.65	109.40	-56.75	peak	

測試頻道: IEEE 802.11n(20M) / 5825 MHz 測試模式: 發射
解析頻寬: 1000 kHz / 1000 kHz 視頻頻寬: 1000 kHz / 10 Hz
量測天線: Horn Antenna 測試距離: 3 米
檢測器: Peak/AV 測試日期: 107/05/03
環境溫度: 25°C 環境濕度: 62%

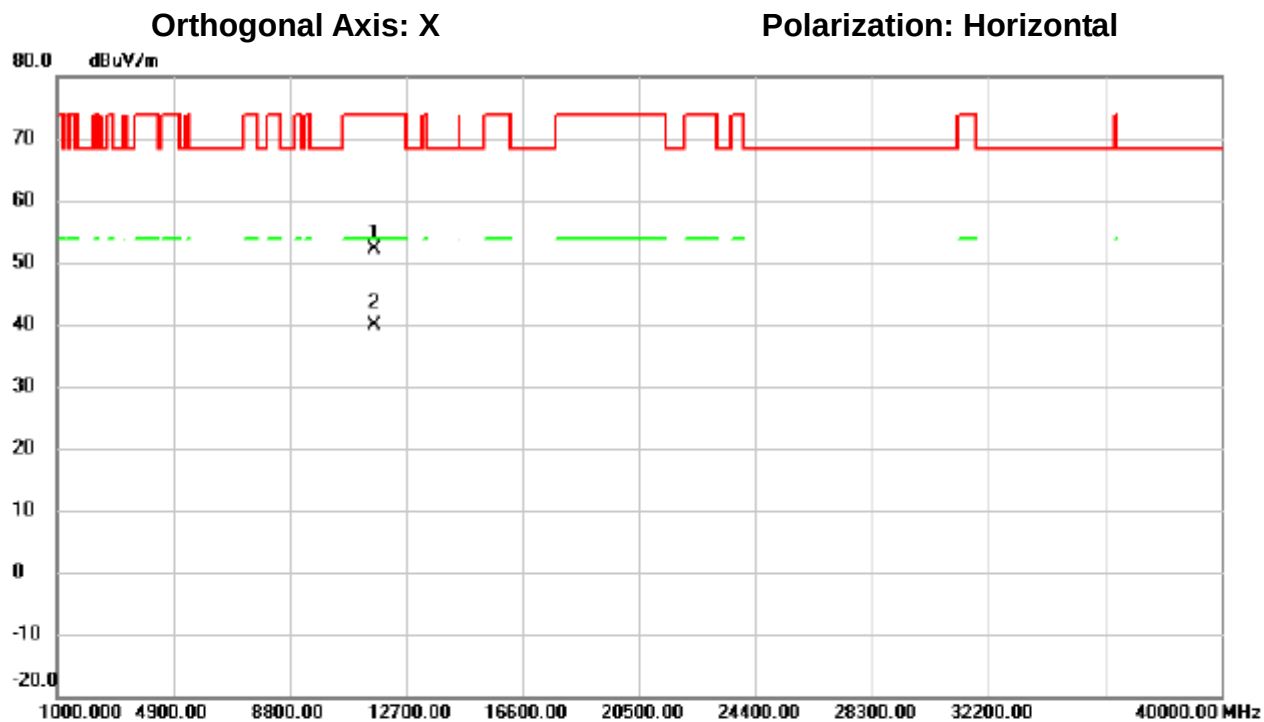


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11652.650	35.80	16.31	52.11	74.00	-21.89	peak	
2	*	11653.950	23.45	16.31	39.76	54.00	-14.24	AVG	

測試頻道: IEEE 802.11n(40M) / 5755 MHz 測試模式: 發射
 解析頻寬: 1000 kHz / 1000 kHz 視頻頻寬: 1000 kHz / 10 Hz
 量測天線: Horn Antenna 測試距離: 3 米
 檢測器: Peak/AV 測試日期: 107/05/03
 環境溫度: 25°C 環境濕度: 62%

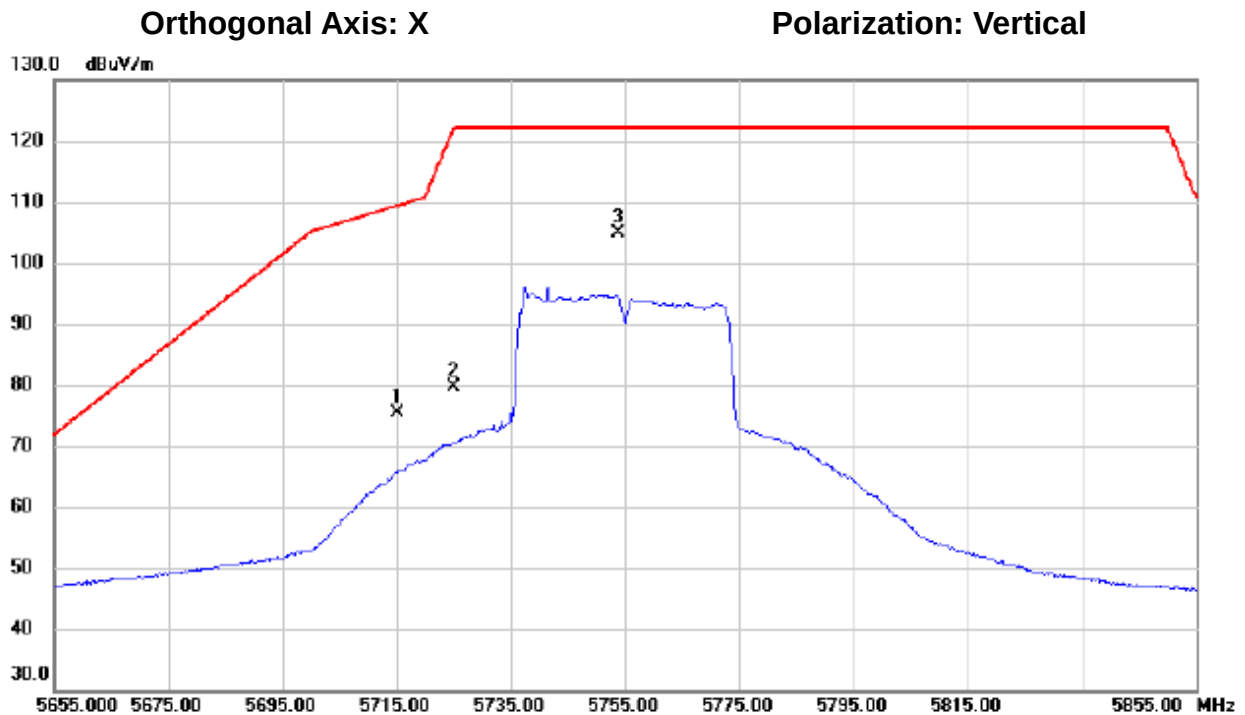


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		5715.000	36.38	38.91	75.29	109.40	-34.11	peak	
2		5725.000	40.81	38.93	79.74	122.20	-42.46	peak	
3	*	5753.700	65.88	38.98	104.86	122.20	-17.34	peak	

測試頻道: IEEE 802.11n(40M) / 5755 MHz 測試模式: 發射
 解析頻寬: 1000 kHz / 1000 kHz 視頻頻寬: 1000 kHz / 10 Hz
 量測天線: Horn Antenna 測試距離: 3 米
 檢測器: Peak/AV 測試日期: 107/05/03
 環境溫度: 25°C 環境濕度: 62%

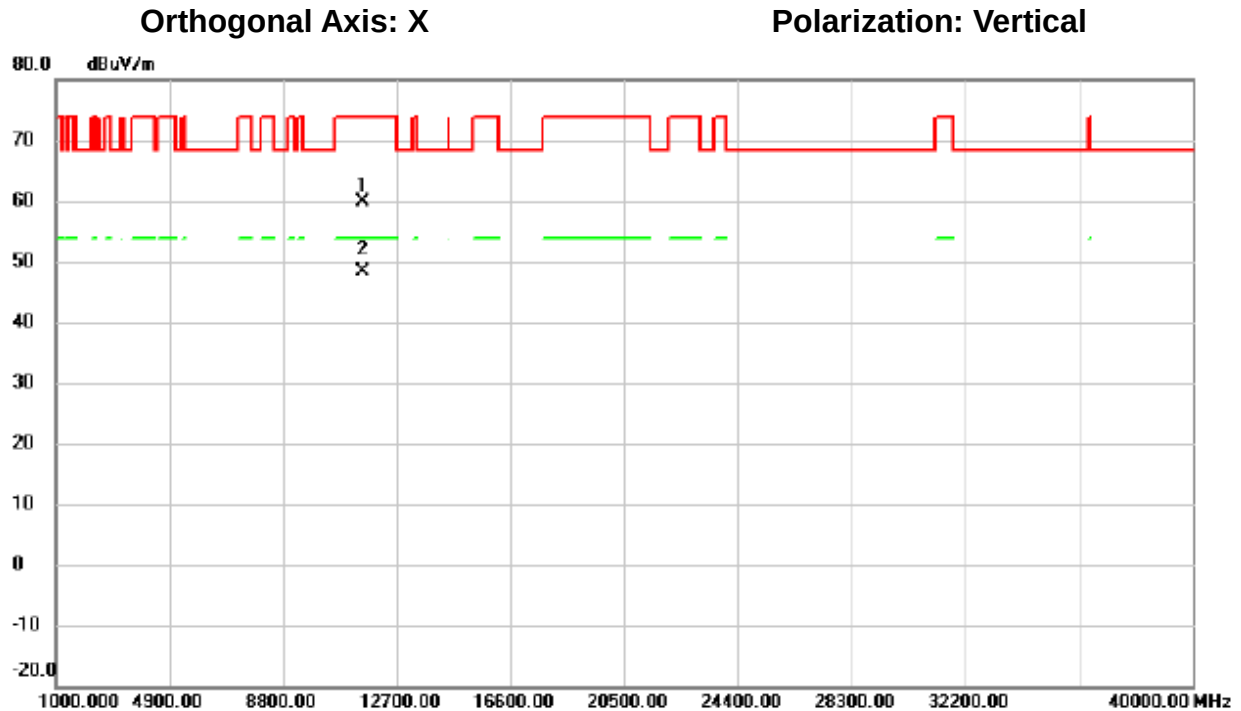


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11514.800	43.12	16.70	59.82	74.00	-14.18	peak	
2	*	11516.200	31.70	16.70	48.40	54.00	-5.60	AVG	

測試頻道: IEEE 802.11n(40M) / 5755 MHz 測試模式: 發射
 解析頻寬: 1000 kHz / 1000 kHz 視頻頻寬: 1000 kHz / 10 Hz
 量測天線: Horn Antenna 測試距離: 3 米
 檢測器: Peak/AV 測試日期: 107/05/03
 環境溫度: 25°C 環境濕度: 62%

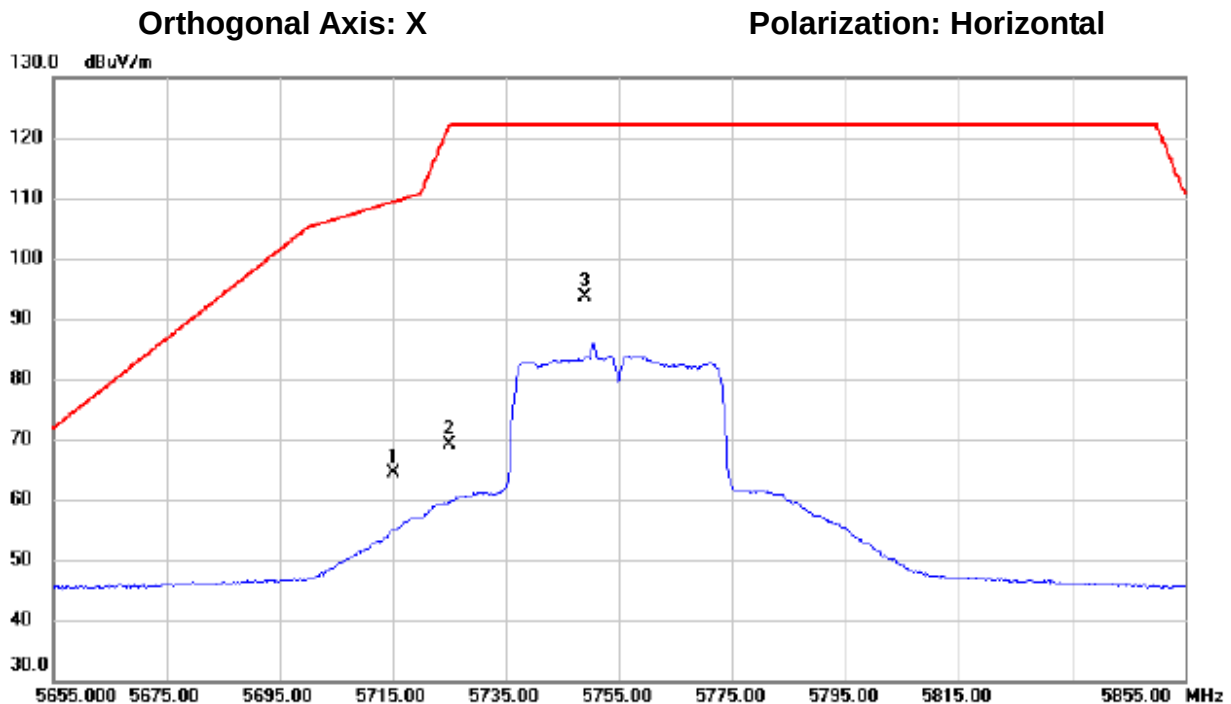


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5715.000	25.51	38.91	64.42	109.40	-44.98	peak	
2		5725.000	30.13	38.93	69.06	122.20	-53.14	peak	
3	*	5749.000	54.54	38.97	93.51	122.20	-28.69	peak	

測試頻道: IEEE 802.11n(40M) / 5755 MHz 測試模式: 發射
 解析頻寬: 1000 kHz / 1000 kHz 視頻頻寬: 1000 kHz / 10 Hz
 量測天線: Horn Antenna 測試距離: 3 米
 檢測器: Peak/AV 測試日期: 107/05/03
 環境溫度: 25°C 環境濕度: 62%

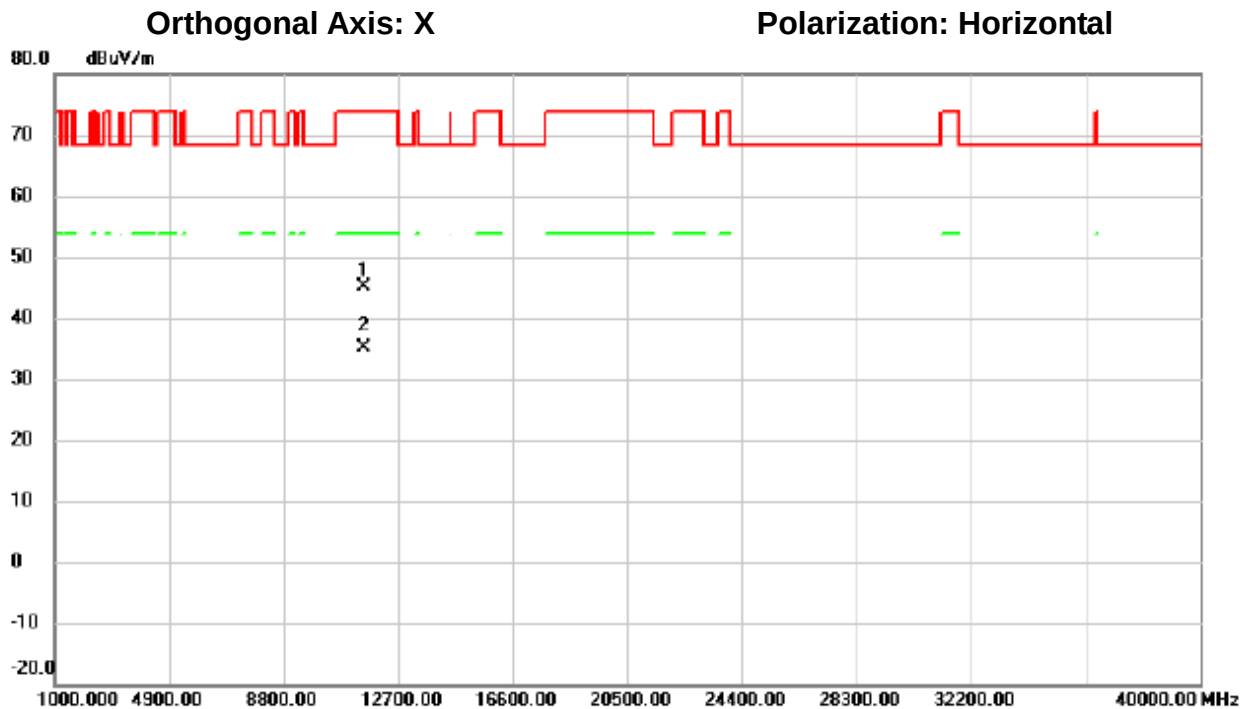


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11513.700	28.54	16.70	45.24	74.00	-28.76	peak	
2	*	11528.200	18.47	16.67	35.14	54.00	-18.86	AVG	

測試頻道: IEEE 802.11n(40M) / 5795 MHz 測試模式: 發射
 解析頻寬: 1000 kHz / 1000 kHz 視頻頻寬: 1000 kHz / 10 Hz
 量測天線: Horn Antenna 測試距離: 3 米
 檢測器: Peak/AV 測試日期: 107/05/03
 環境溫度: 25°C 環境濕度: 62%

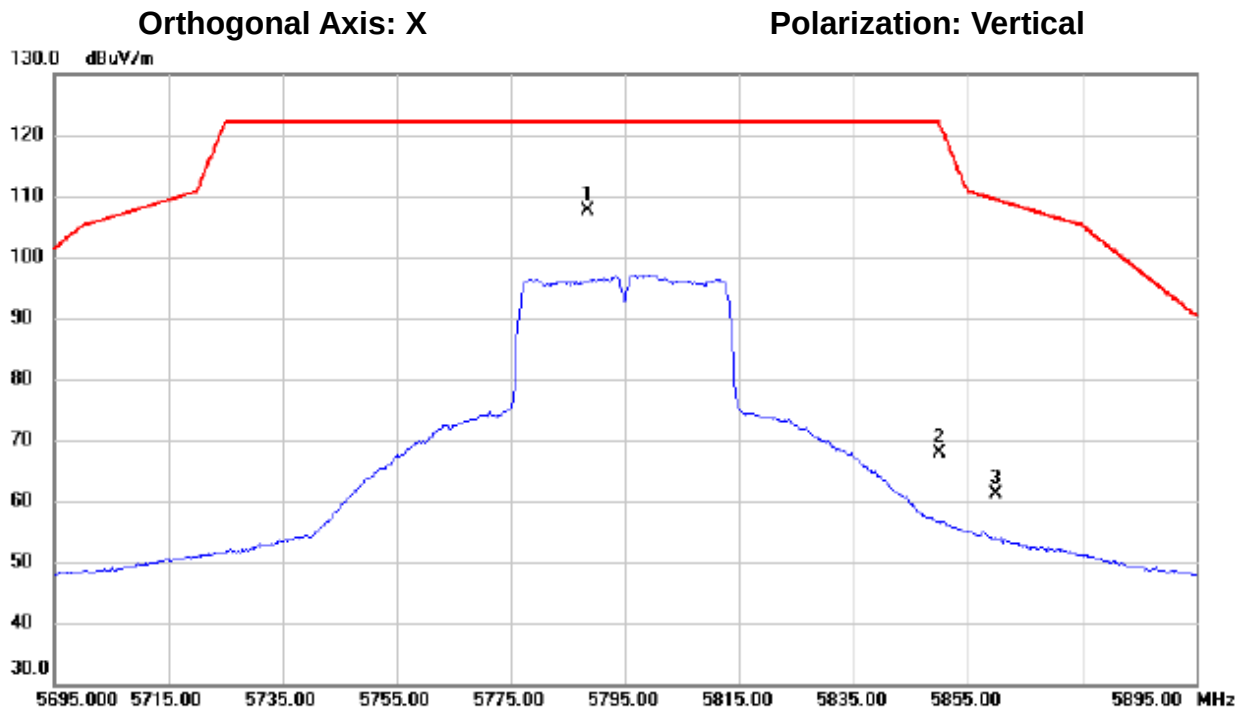


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	5788.500	68.67	39.05	107.72	122.20	-14.48	peak	
2		5850.000	28.76	39.17	67.93	122.20	-54.27	peak	
3		5860.000	21.83	39.18	61.01	109.40	-48.39	peak	

測試頻道: IEEE 802.11n(40M) / 5795 MHz 測試模式: 發射
 解析頻寬: 1000 kHz / 1000 kHz 視頻頻寬: 1000 kHz / 10 Hz
 量測天線: Horn Antenna 測試距離: 3 米
 檢測器: Peak/AV 測試日期: 107/05/03
 環境溫度: 25°C 環境濕度: 62%

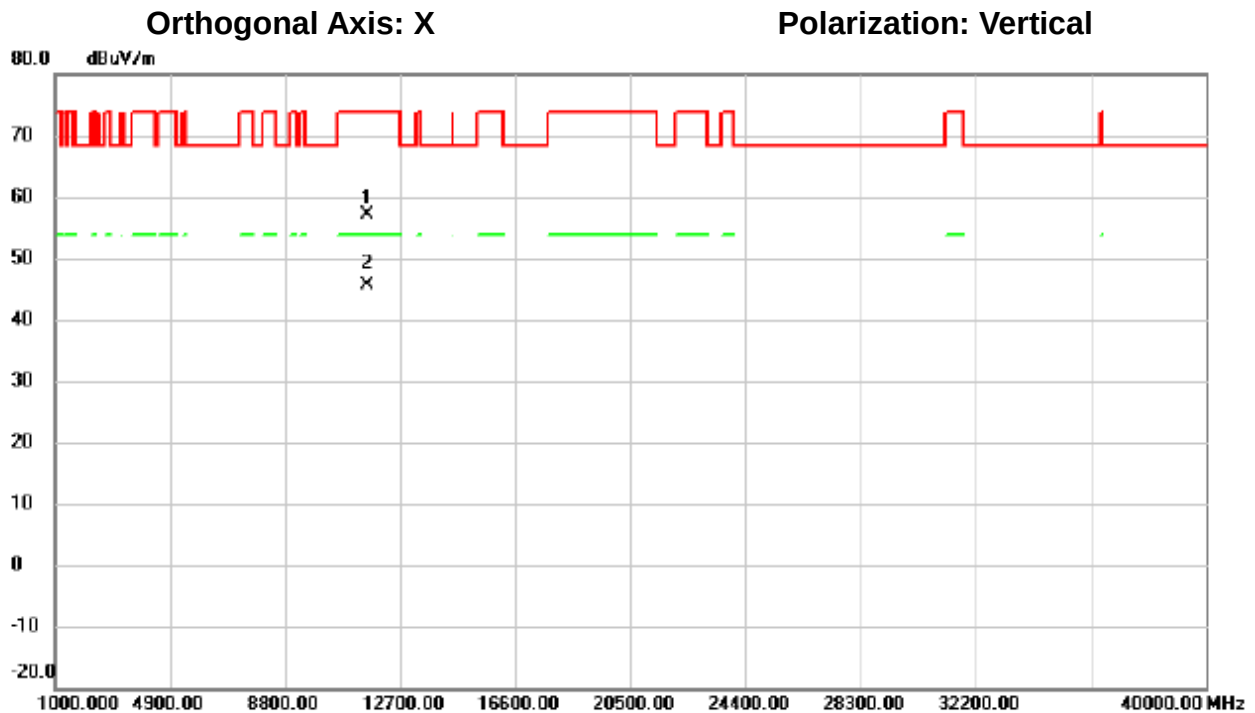


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11593.500	40.67	16.48	57.15	74.00	-16.85	peak	
2	*	11593.620	29.11	16.48	45.59	54.00	-8.41	AVG	

測試頻道: IEEE 802.11n(40M) / 5795 MHz 測試模式: 發射
 解析頻寬: 1000 kHz / 1000 kHz 視頻頻寬: 1000 kHz / 10 Hz
 量測天線: Horn Antenna 測試距離: 3 米
 檢測器: Peak/AV 測試日期: 107/05/03
 環境溫度: 25°C 環境濕度: 62%

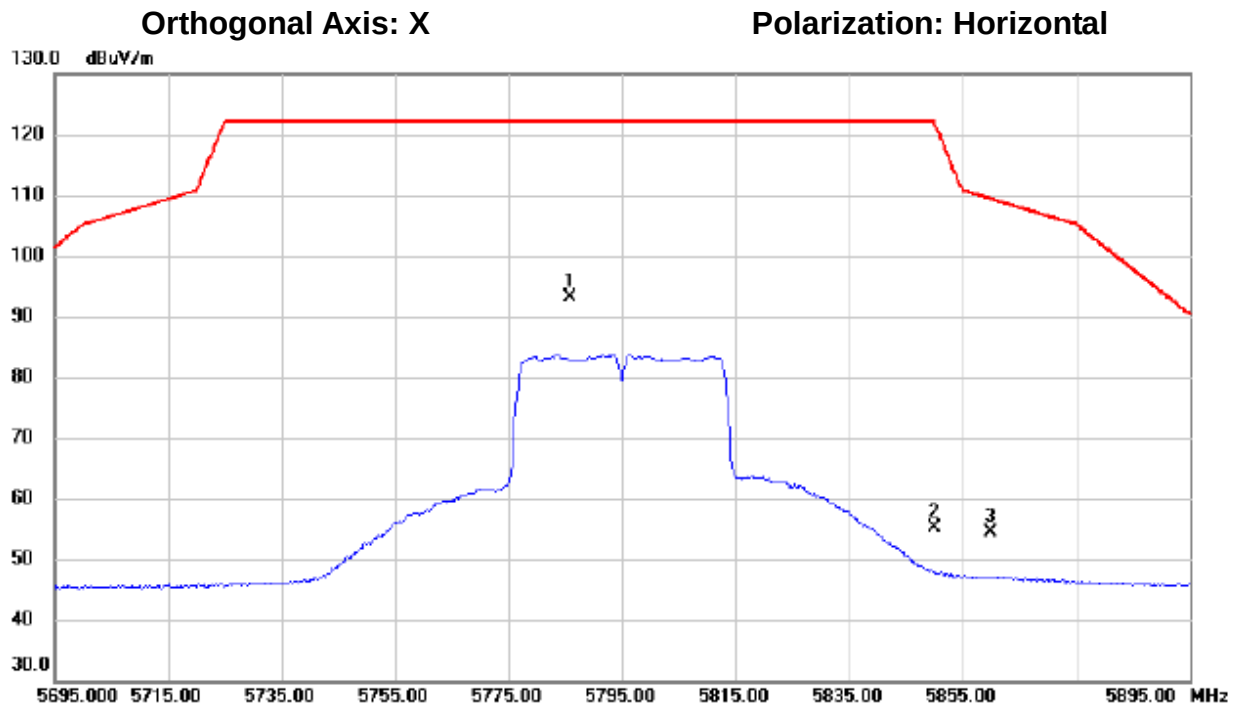

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	5785.900	54.14	39.05	93.19	122.20	-29.01	peak	
2		5850.000	16.04	39.17	55.21	122.20	-66.99	peak	
3		5860.000	15.27	39.18	54.45	109.40	-54.95	peak	

測試頻道: IEEE 802.11n(40M) / 5795 MHz 測試模式: 發射
 解析頻寬: 1000 kHz / 1000 kHz 視頻頻寬: 1000 kHz / 10 Hz
 量測天線: Horn Antenna 測試距離: 3 米
 檢測器: Peak/AV 測試日期: 107/05/03
 環境溫度: 25°C 環境濕度: 62%

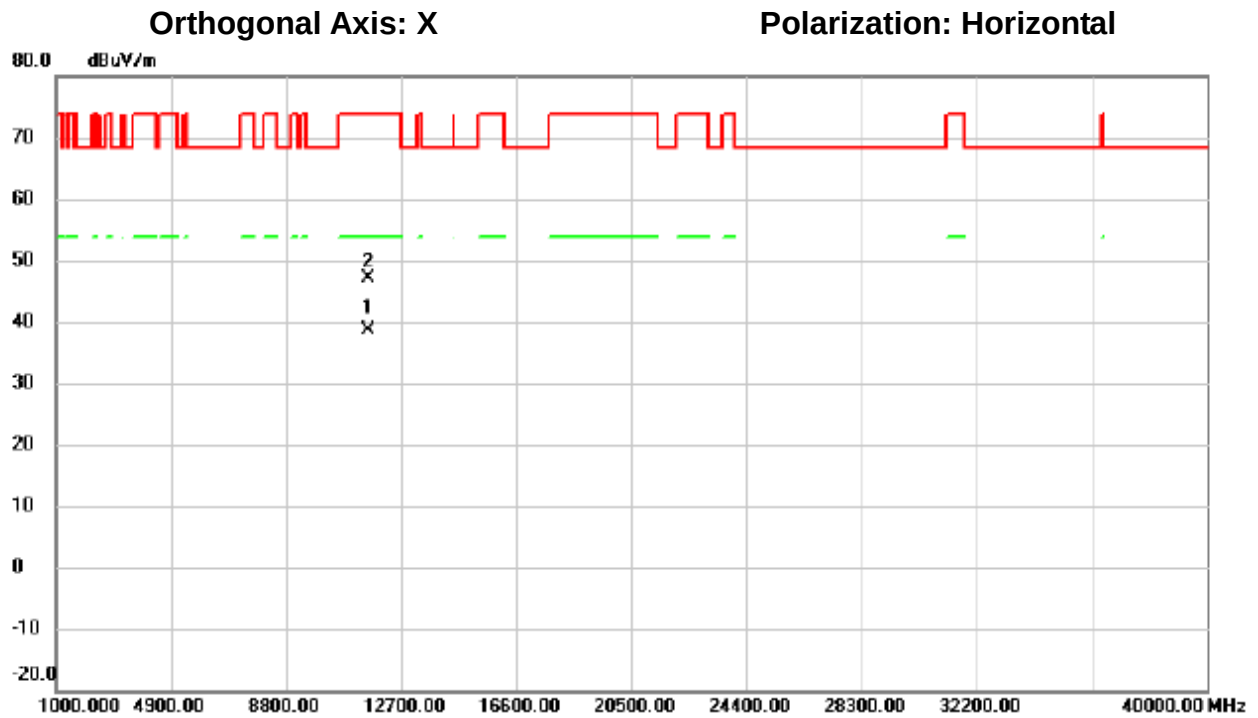

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	11590.100	22.15	16.49	38.64	54.00	-15.36	AVG	
2		11594.600	30.65	16.48	47.13	74.00	-26.87	peak	

測試頻道: IEEE 802.11ac (20 MHz) /
5745 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna


測試距離: 3 米

檢測器: Peak/AV

測試日期: 107/05/03

環境溫度: 25 °C

環境濕度: 62%

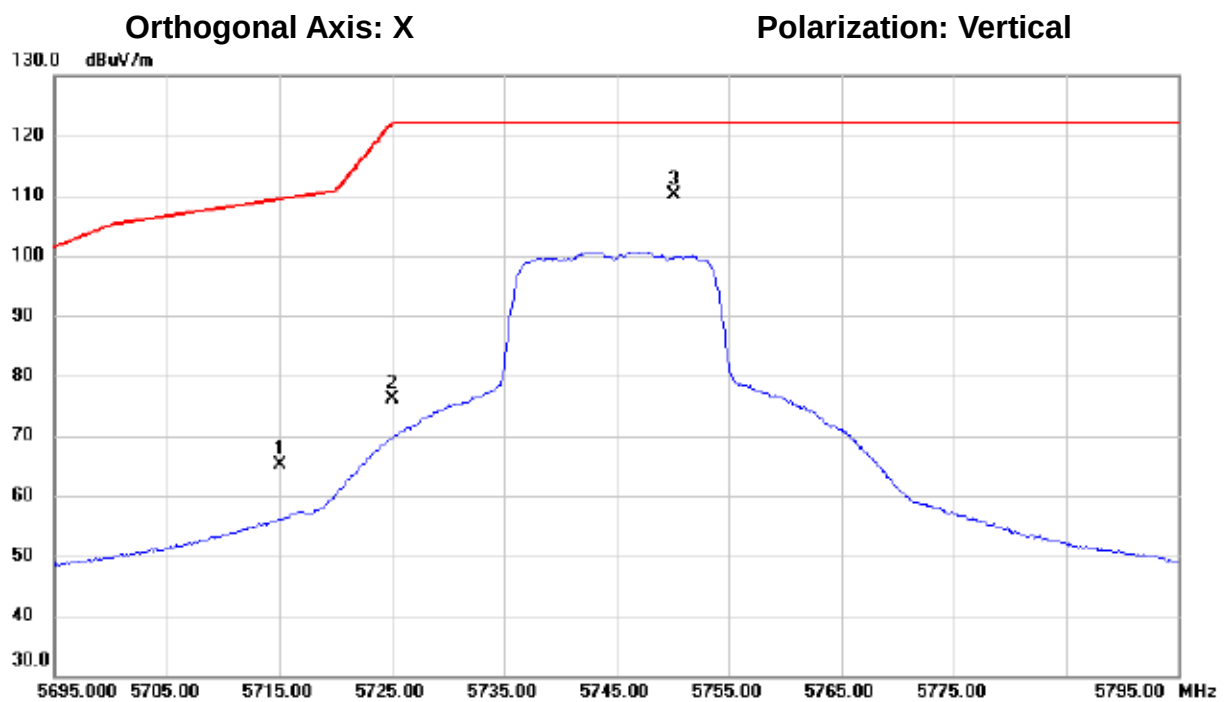

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		5715.000	26.18	38.91	65.09	109.40	-44.31	peak	
2		5725.000	37.11	38.93	76.04	122.20	-46.16	peak	
3 *		5750.150	71.20	38.98	110.18	122.20	-12.02	peak	

測試頻道: IEEE 802.11ac (20 MHz) /
5745 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢測器: Peak/AV

環境溫度: 25 °C


測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz

測試距離: 3 米

測試日期: 107/05/03

環境濕度: 62%

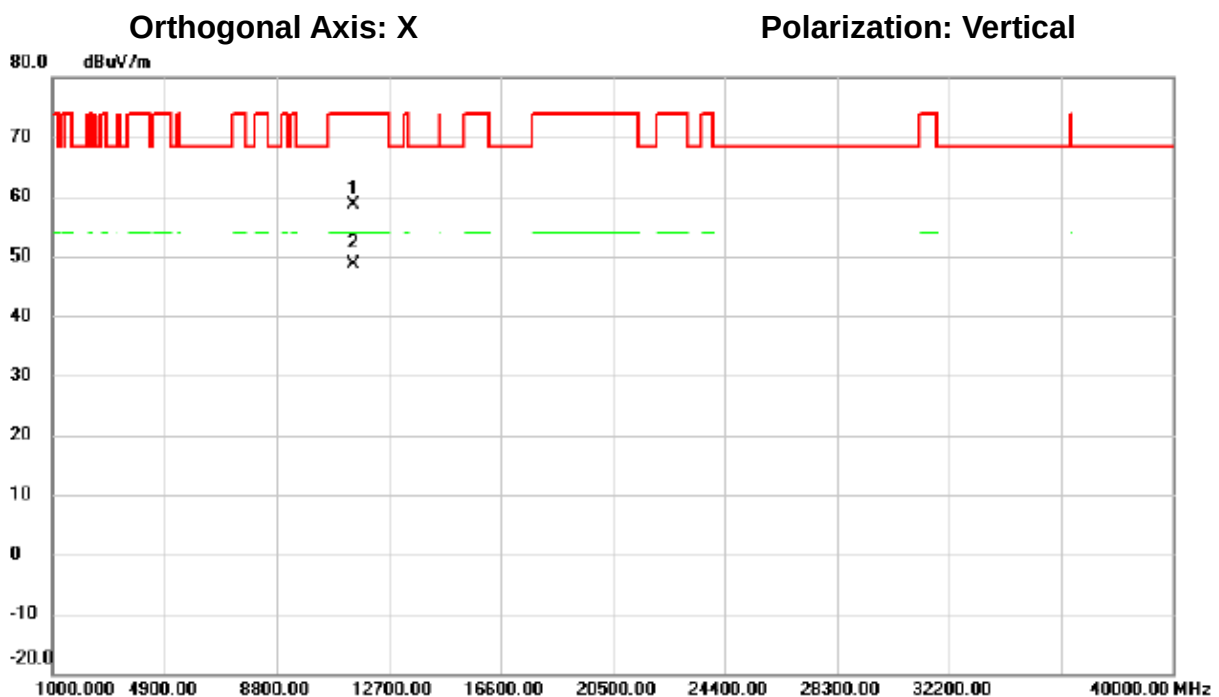

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11485.250	41.79	16.73	58.52	74.00	-15.48	peak	
2	*	11490.500	31.98	16.73	48.71	54.00	-5.29	AVG	

測試頻道: IEEE 802.11ac (20 MHz) / 5745 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢測器: Peak/AV


測試日期: 107/05/03

環境溫度: 25 °C

環境濕度: 62%

Orthogonal Axis: X


Polarization: Horizontal

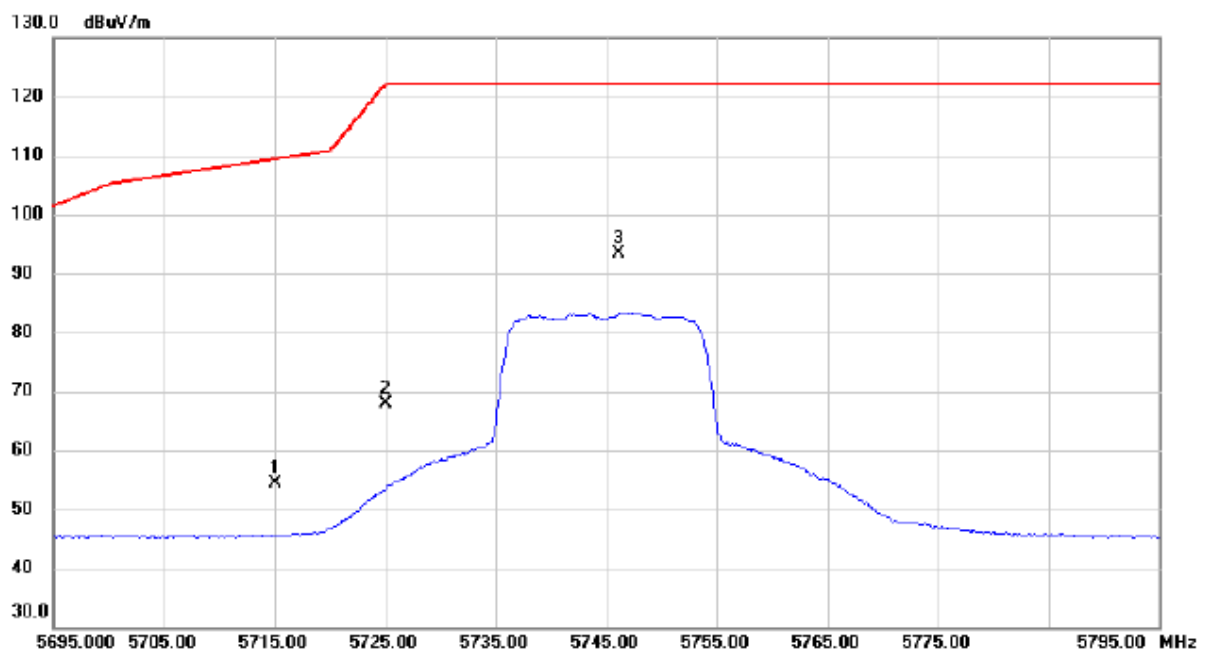

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5715.000	15.40	38.91	54.31	109.40	-55.09	peak	
2		5725.000	28.83	38.93	67.76	122.20	-54.44	peak	
3	*	5746.200	54.39	38.97	93.36	122.20	-28.84	peak	

測試頻道: IEEE 802.11ac (20 MHz) /
 5745 MHz
 解析頻寬: 1000 kHz / 1000 kHz
 量測天線: Horn Antenna
 檢測器: Peak/AV
 環境溫度: 25 °C

測試模式: 發射
 視頻頻寬: 1000 kHz / 10 Hz
 測試距離: 3 米
 測試日期: 107/05/03
 環境濕度: 62%

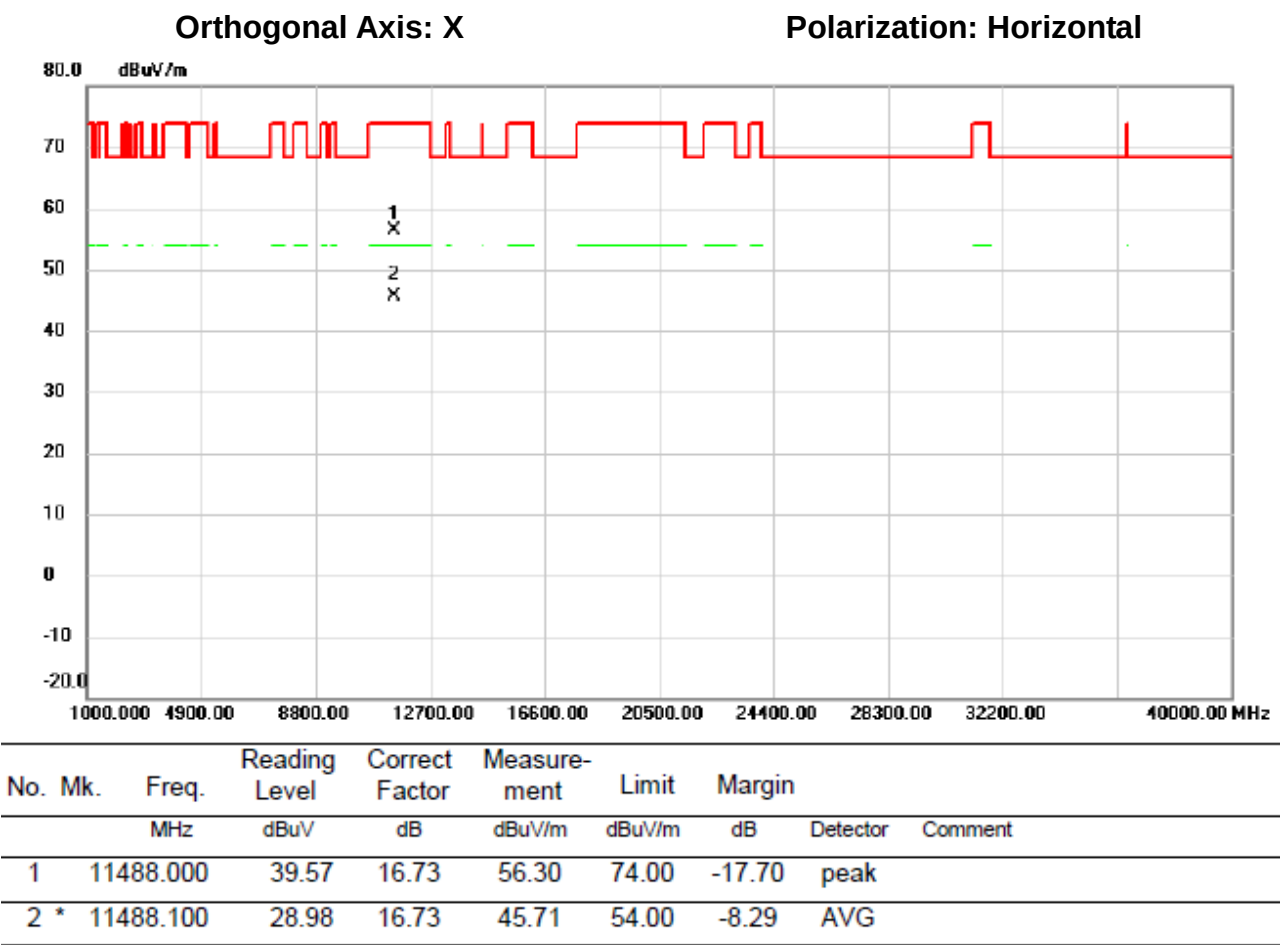

測試頻道: IEEE 802.11ac (20 MHz) /
5785 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢測器: Peak/AV

環境溫度: 25 °C

測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz


測試距離: 3 米

測試日期: 107/05/03

環境濕度: 62%

Orthogonal Axis: X

Polarization: Vertical

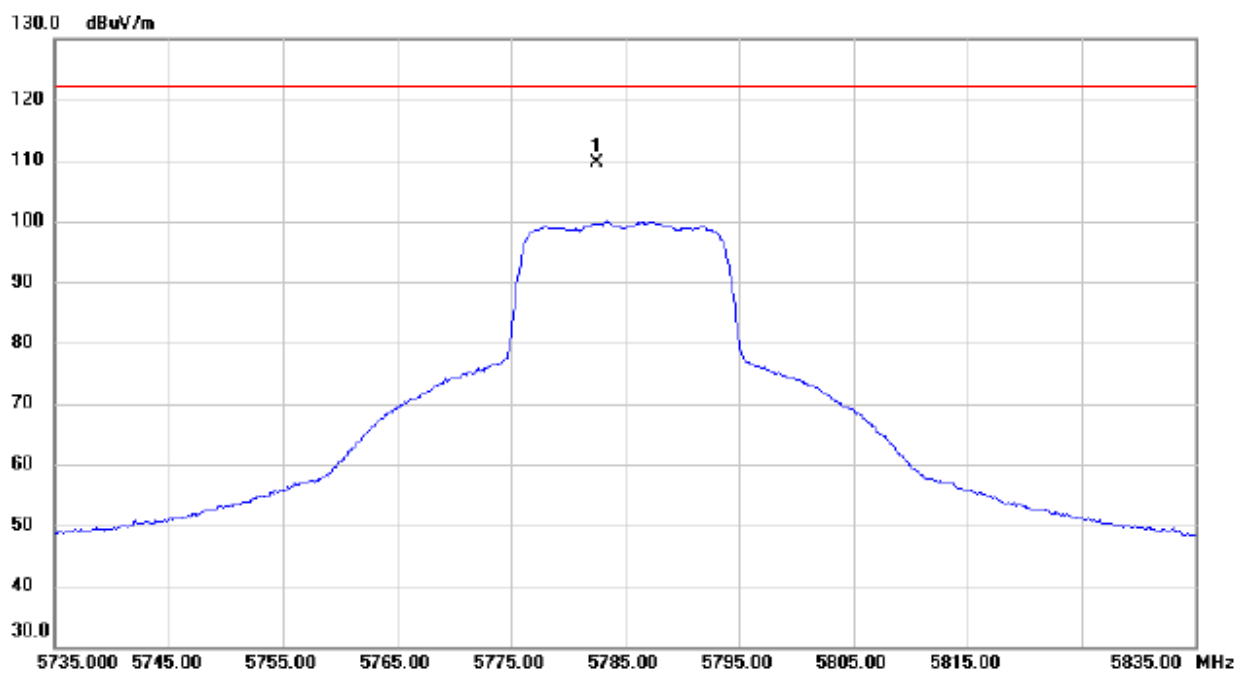

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	5782.550	70.51	39.03	109.54	122.20	-12.66	peak	

測試頻道: IEEE 802.11ac (20 MHz) /
5785 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢測器: Peak/AV

環境溫度: 25 °C


測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz

測試距離: 3 米

測試日期: 107/05/03

環境濕度: 62%

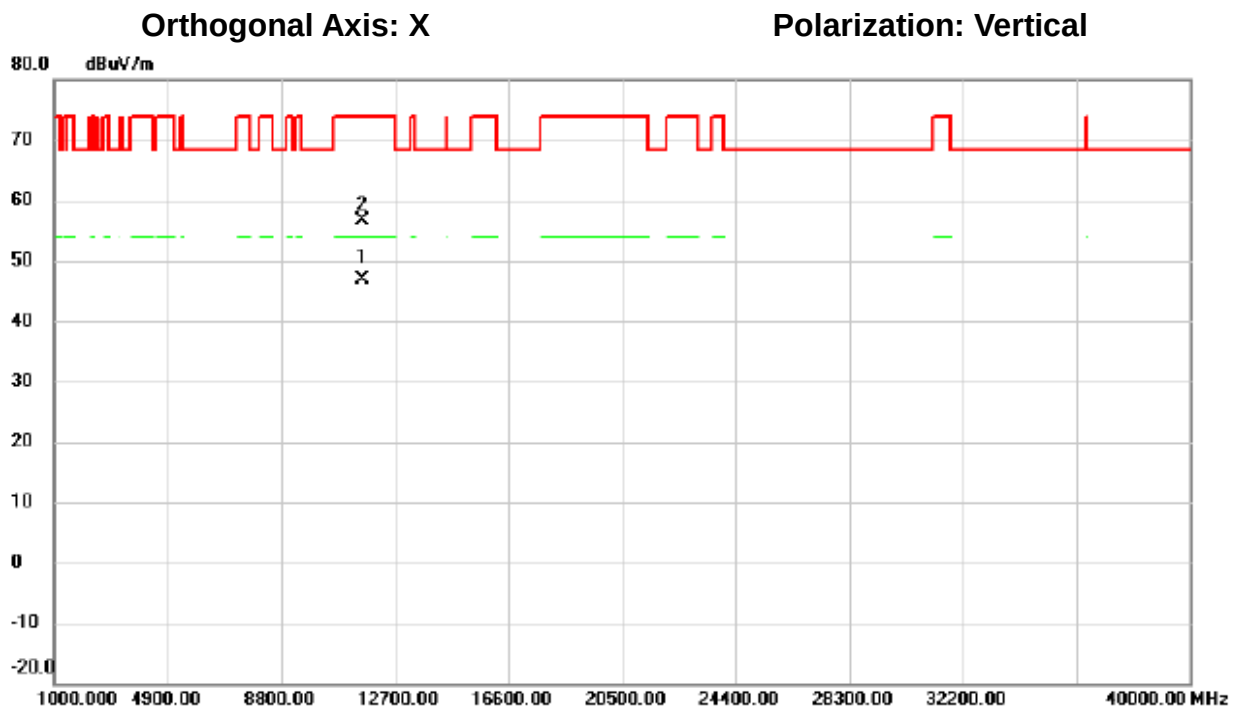

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	11569.350	30.42	16.55	46.97	54.00	-7.03	AVG	
2		11570.800	39.99	16.55	56.54	74.00	-17.46	peak	

測試頻道: IEEE 802.11ac (20 MHz) /
5785 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢測器: Peak/AV

環境溫度: 25 °C

測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz


測試距離: 3 米

測試日期: 107/05/03

環境濕度: 62%

Orthogonal Axis: X


Polarization: Horizontal

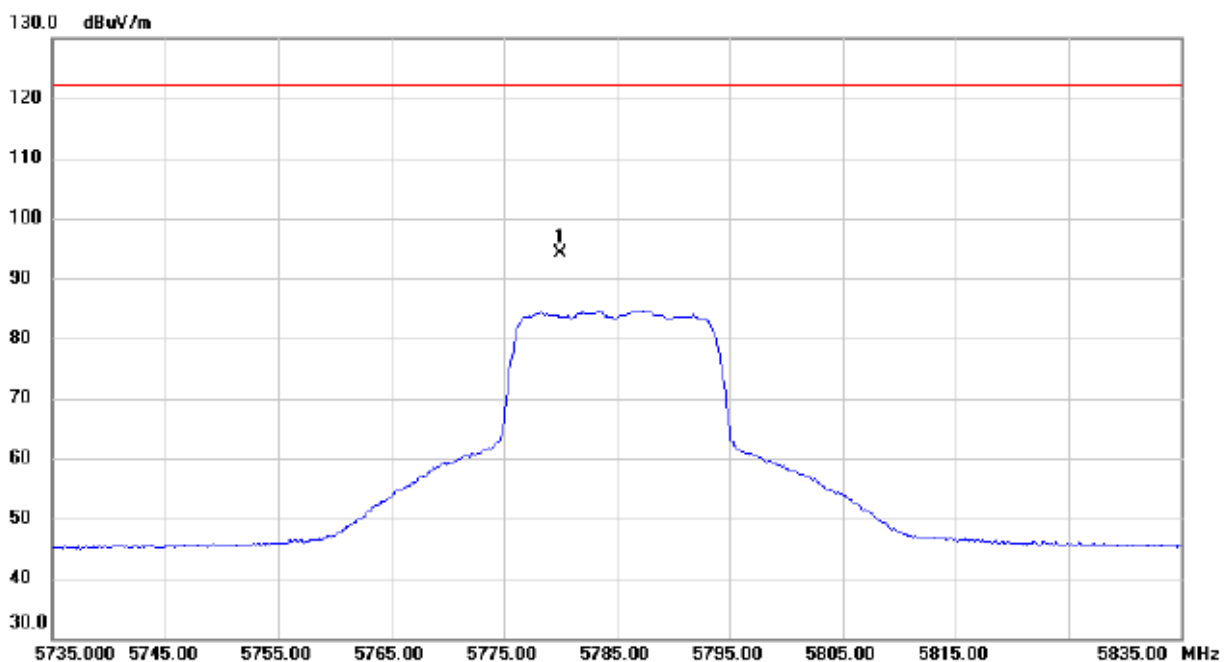

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	5780.050	54.99	39.03	94.02	122.20	-28.18	peak	

測試頻道: IEEE 802.11ac (20 MHz) / 5785 MHz
 解析頻寬: 1000 kHz / 1000 kHz
 量測天線: Horn Antenna
 檢測器: Peak/AV
 環境溫度: 25 °C

測試模式: 發射
 視頻頻寬: 1000 kHz / 10 Hz
 測試距離: 3 米
 測試日期: 107/05/03
 環境濕度: 62%

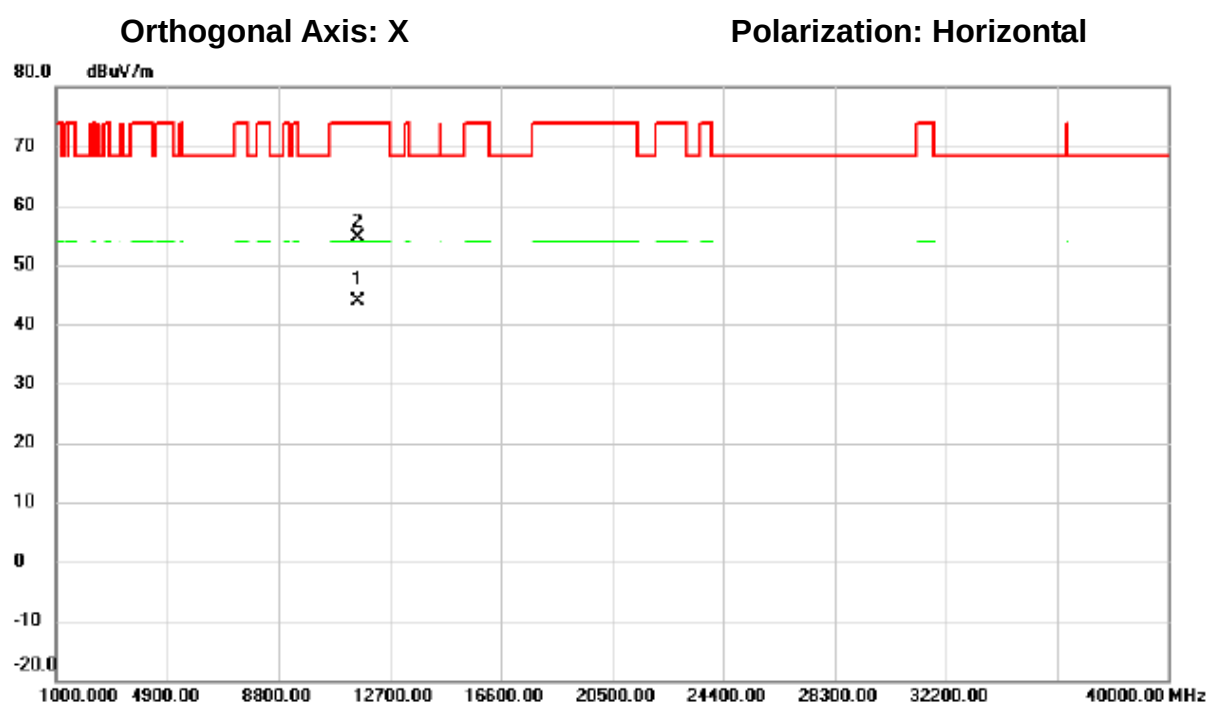

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	11568.850	27.42	16.55	43.97	54.00	-10.03	AVG	
2		11569.900	38.07	16.55	54.62	74.00	-19.38	peak	

測試頻道: IEEE 802.11ac (20 MHz) /
5825 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢測器: Peak/AV

環境溫度: 25 °C

測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz


測試距離: 3 米

測試日期: 107/05/03

環境濕度: 62%

Orthogonal Axis: X

Polarization: Vertical

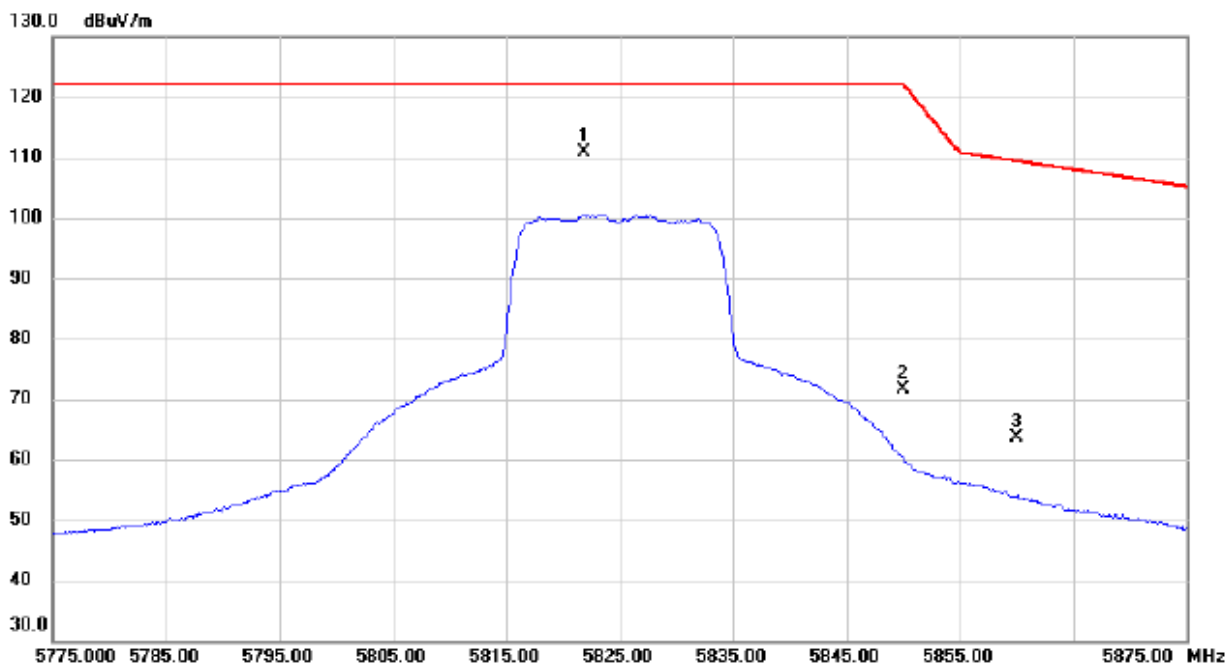

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	5821.800	71.65	39.11	110.76	122.20	-11.44	peak	
2		5850.000	32.48	39.17	71.65	122.20	-50.55	peak	
3		5860.000	24.54	39.18	63.72	109.40	-45.68	peak	

測試頻道: IEEE 802.11ac (20 MHz) /
5825 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢測器: Peak/AV

環境溫度: 25 °C


測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz

測試距離: 3 米

測試日期: 107/05/03

環境濕度: 62%

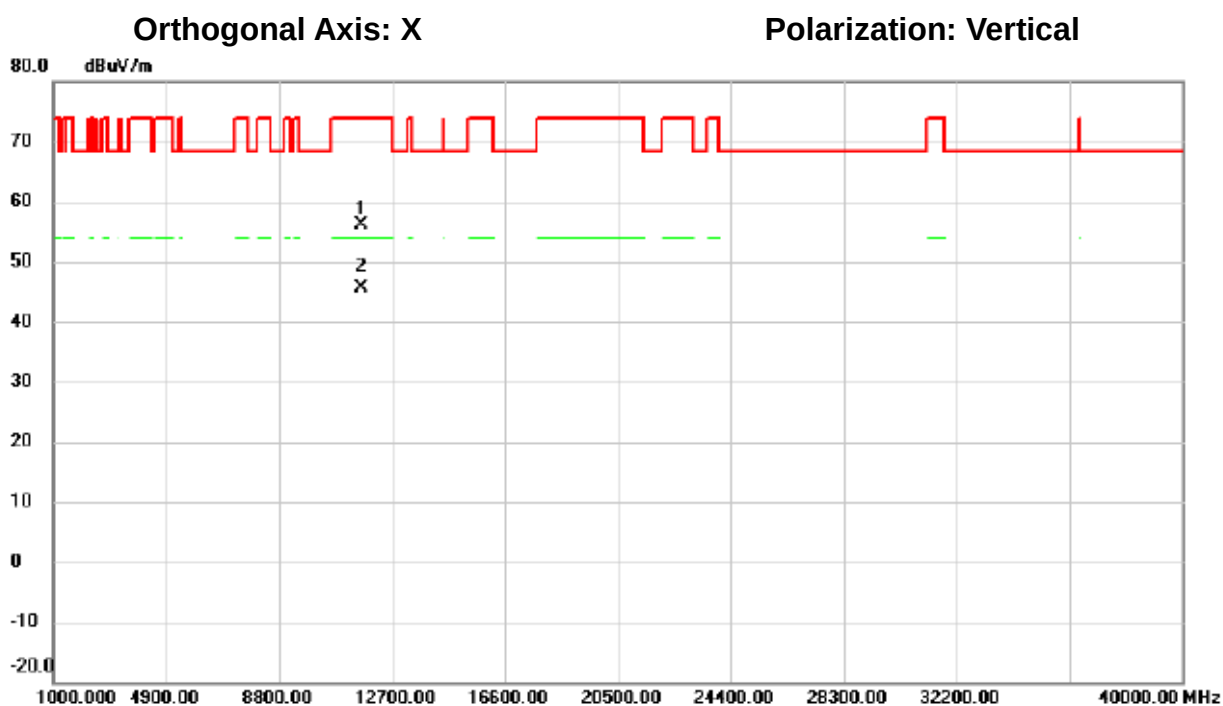


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin		
		MHz	dBuV	Factor	ment	dBuV/m	dB	Detector	Comment
1		11647.550	39.90	16.33	56.23	74.00	-17.77	peak	
2	*	11648.950	29.23	16.32	45.55	54.00	-8.45	AVG	

測試頻道: IEEE 802.11ac (20 MHz) /
 5825 MHz
 解析頻寬: 1000 kHz / 1000 kHz
 量測天線: Horn Antenna
 檢測器: Peak/AV
 環境溫度: 25 °C

測試模式: 發射
 視頻頻寬: 1000 kHz / 10 Hz
 測試距離: 3 米
 測試日期: 107/05/03
 環境濕度: 62%

Orthogonal Axis: X

Polarization: Horizontal

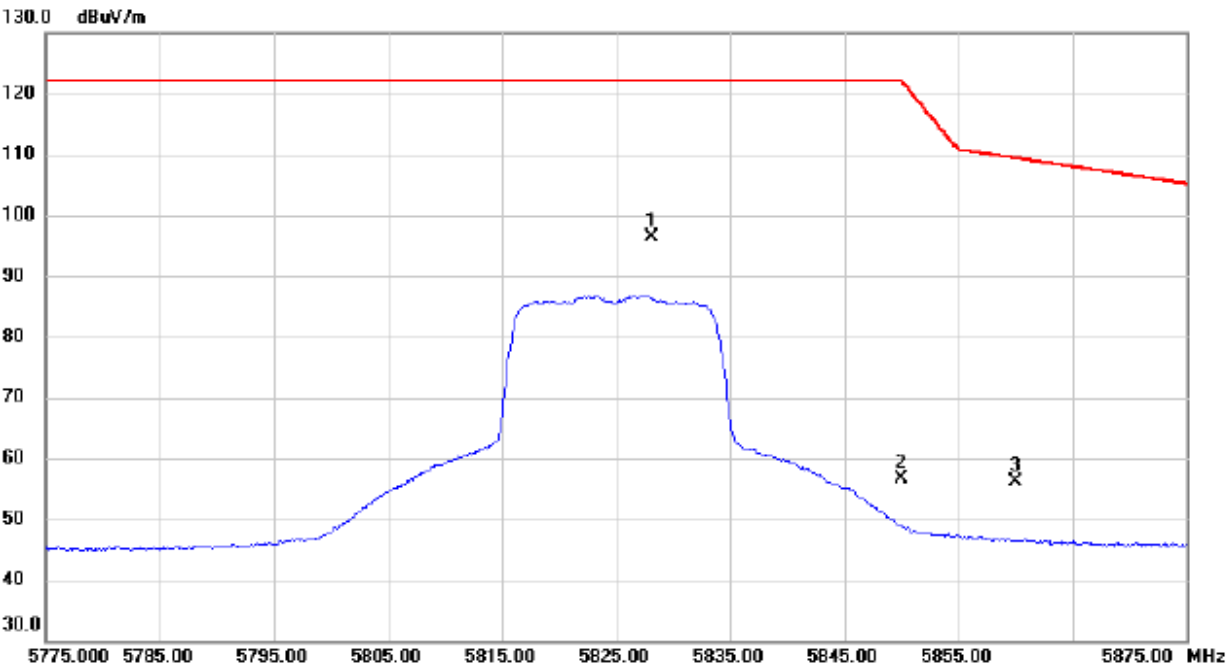

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	5828.200	57.29	39.13	96.42	122.20	-25.78	peak	
2		5850.000	17.34	39.17	56.51	122.20	-65.69	peak	
3		5860.000	16.84	39.18	56.02	109.40	-53.38	peak	

測試頻道: IEEE 802.11ac (20 MHz) /
5825 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢測器: Peak/AV

環境溫度: 25 °C


測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz

測試距離: 3 米

測試日期: 107/05/03

環境濕度: 62%

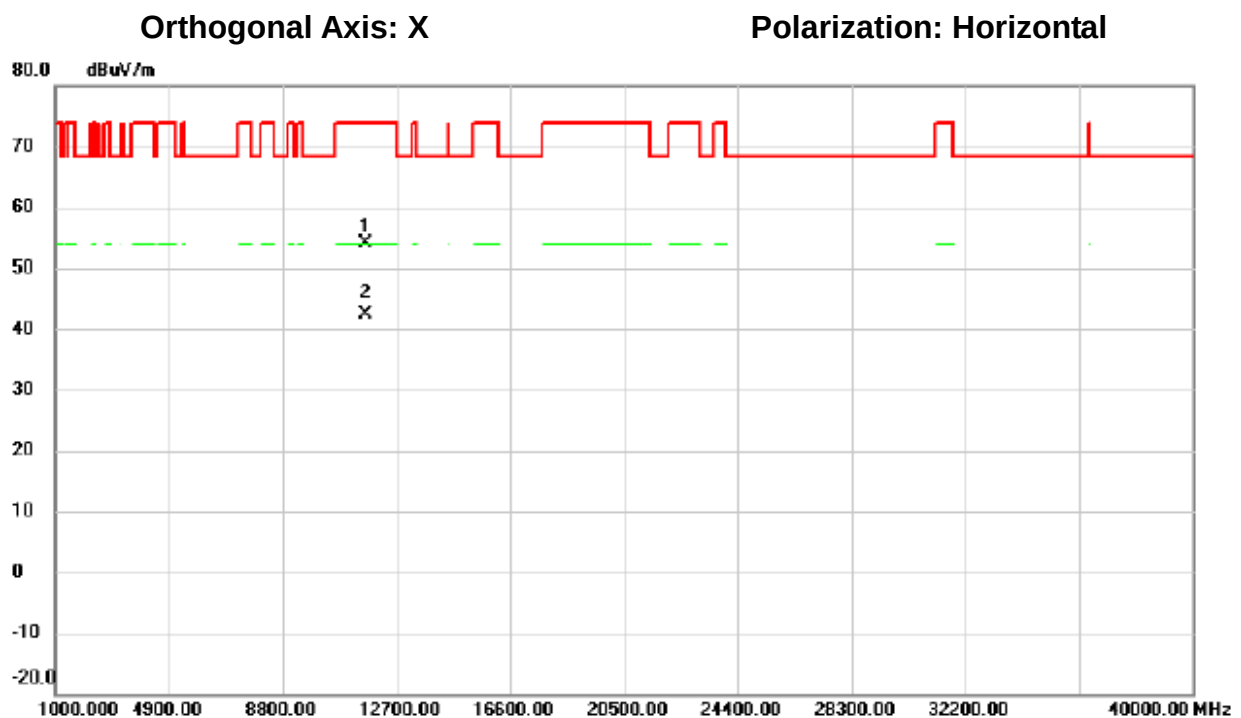

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11646.500	37.69	16.33	54.02	74.00	-19.98	peak	
2	*	11648.700	26.10	16.32	42.42	54.00	-11.58	AVG	

測試頻道: IEEE 802.11ac (40 MHz) /
5755 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢測器: Peak/AV

環境溫度: 25 °C


測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz

測試距離: 3 米

測試日期: 107/05/03


環境濕度: 62%

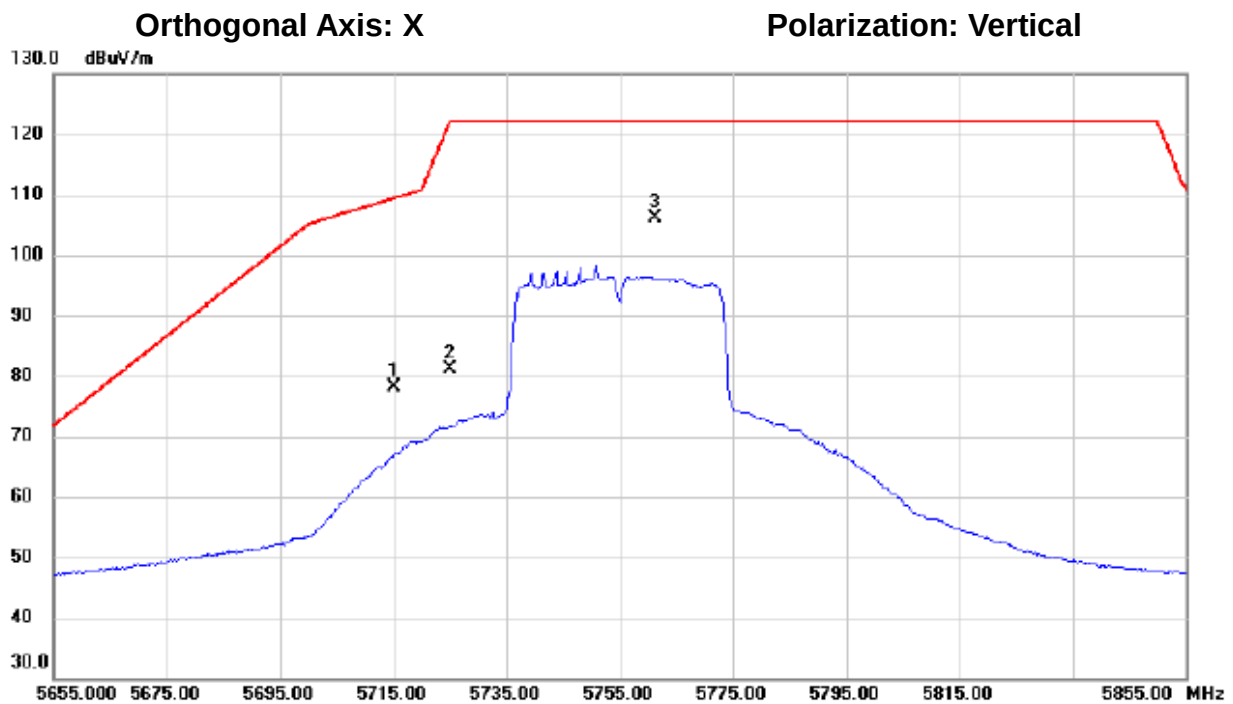

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin		
		MHz	Level	Factor	ment			Detector	Comment
			dBuV	dB	dBuV/m	dBuV/m	dB		
1		5715.000	39.33	38.91	78.24	109.40	-31.16	peak	
2		5725.000	42.12	38.93	81.05	122.20	-41.15	peak	
3 *		5761.200	67.20	39.00	106.20	122.20	-16.00	peak	

測試頻道: IEEE 802.11ac (40 MHz) /
 5755 MHz
 解析頻寬: 1000 kHz / 1000 kHz
 量測天線: Horn Antenna
 檢測器: Peak/AV
 環境溫度: 25 °C

測試模式: 發射
 視頻頻寬: 1000 kHz / 10 Hz
 測試距離: 3 米
 測試日期: 107/05/03
 環境濕度: 62%

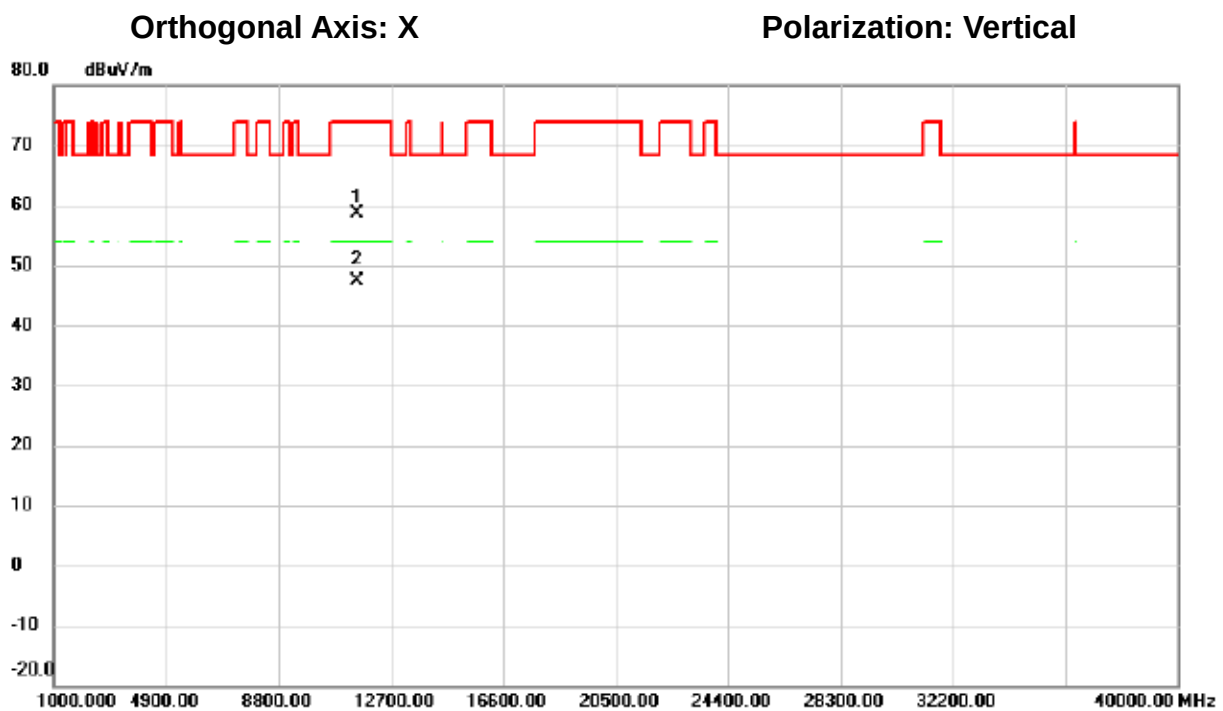

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11514.800	41.81	16.70	58.51	74.00	-15.49	peak	
2	*	11516.200	30.76	16.70	47.46	54.00	-6.54	AVG	

測試頻道: IEEE 802.11ac (40 MHz) /
5755 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢測器: Peak/AV


測試日期: 107/05/03

環境溫度: 25 °C

環境濕度: 62%

Orthogonal Axis: X

Polarization: Horizontal

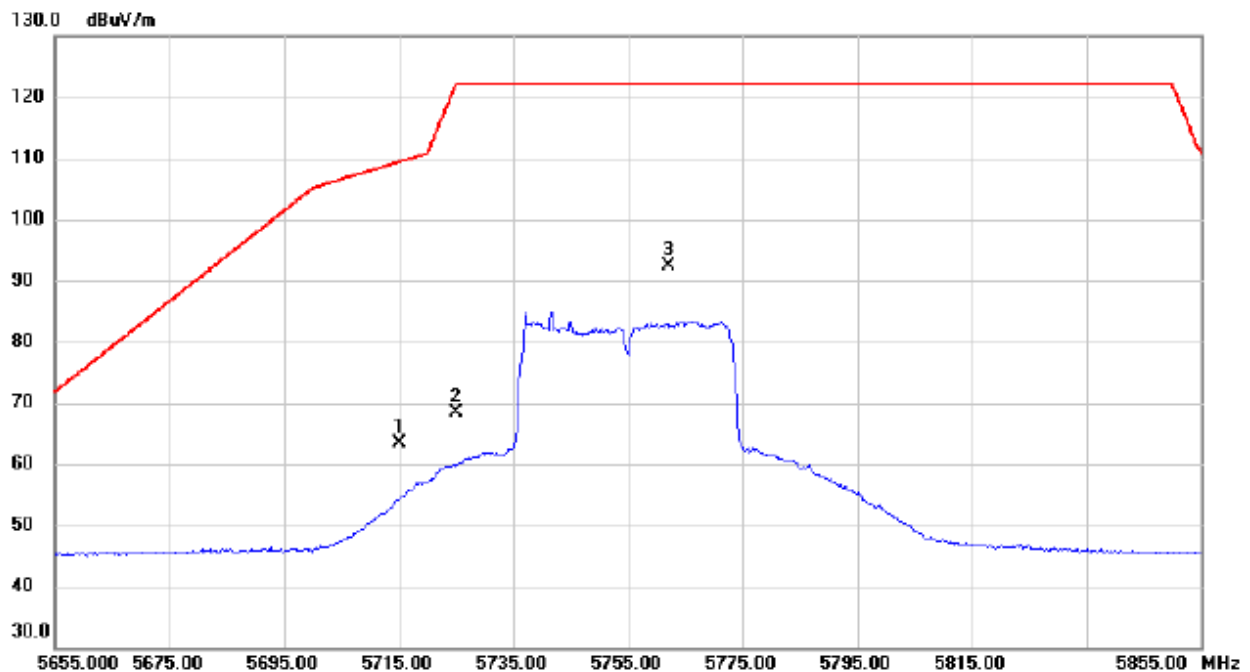

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5715.000	24.48	38.91	63.39	109.40	-46.01	peak	
2		5725.000	29.48	38.93	68.41	122.20	-53.79	peak	
3 *		5762.100	53.27	39.00	92.27	122.20	-29.93	peak	

測試頻道: IEEE 802.11ac (40 MHz) /
5755 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢測器: Peak/AV

環境溫度: 25 °C


測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz

測試距離: 3 米

測試日期: 107/05/03

環境濕度: 62%

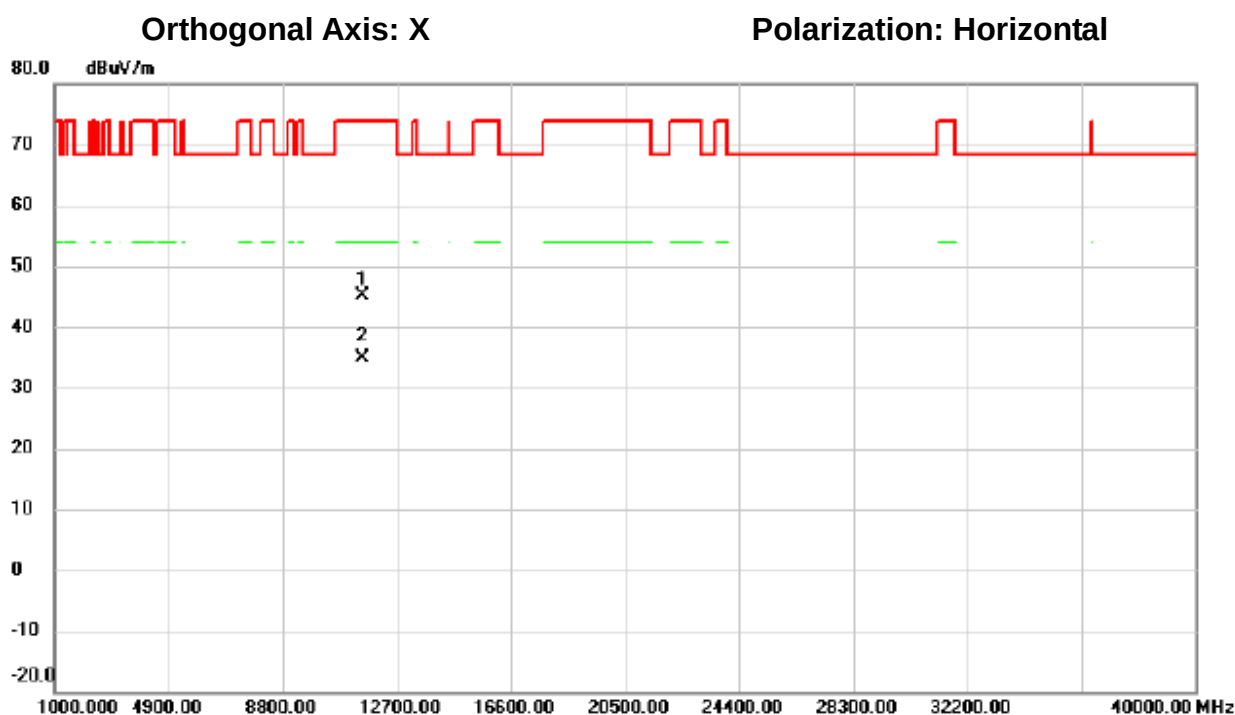

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11515.000	28.36	16.70	45.06	74.00	-28.94	peak	
2 *		11531.900	18.10	16.67	34.77	54.00	-19.23	AVG	

測試頻道: IEEE 802.11ac (40 MHz) / 5795 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢測器: Peak/AV


測試日期: 107/05/03

環境溫度: 25 °C

環境濕度: 62%

Orthogonal Axis: X

Polarization: Vertical

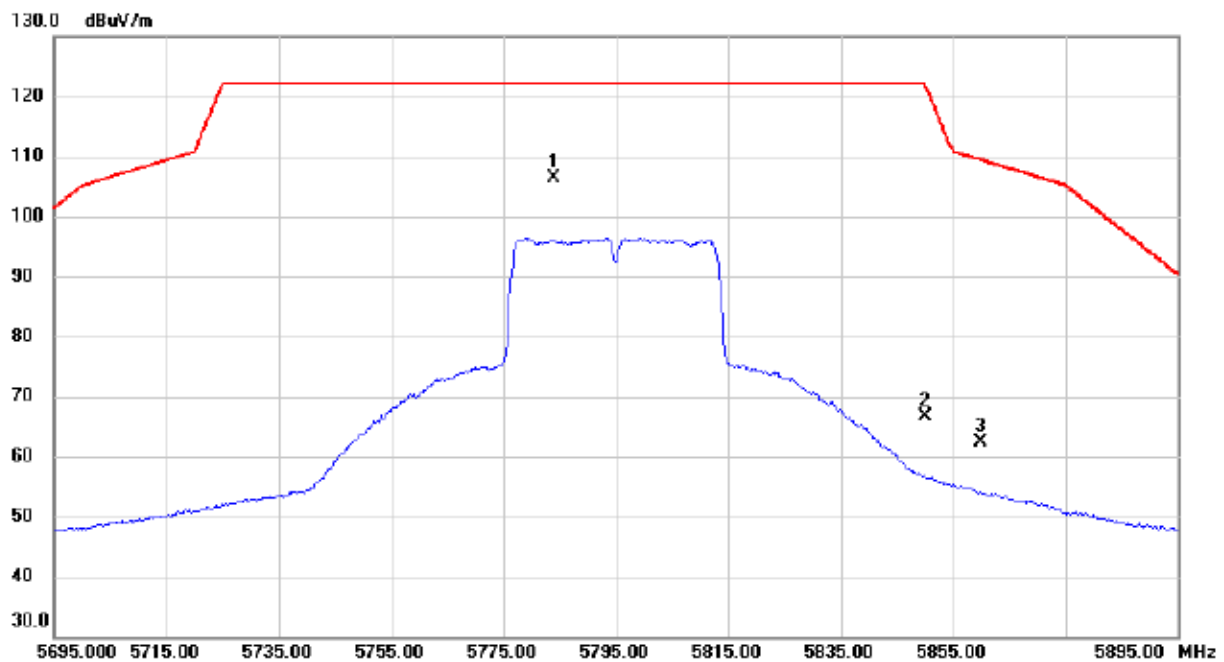

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	5784.000	67.37	39.04	106.41	122.20	-15.79	peak	
2		5850.000	27.40	39.17	66.57	122.20	-55.63	peak	
3		5860.000	23.11	39.18	62.29	109.40	-47.11	peak	

測試頻道: IEEE 802.11ac (40 MHz) /
5795 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢測器: Peak/AV

環境溫度: 25 °C


測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz

測試距離: 3 米

測試日期: 107/05/03

環境濕度: 62%

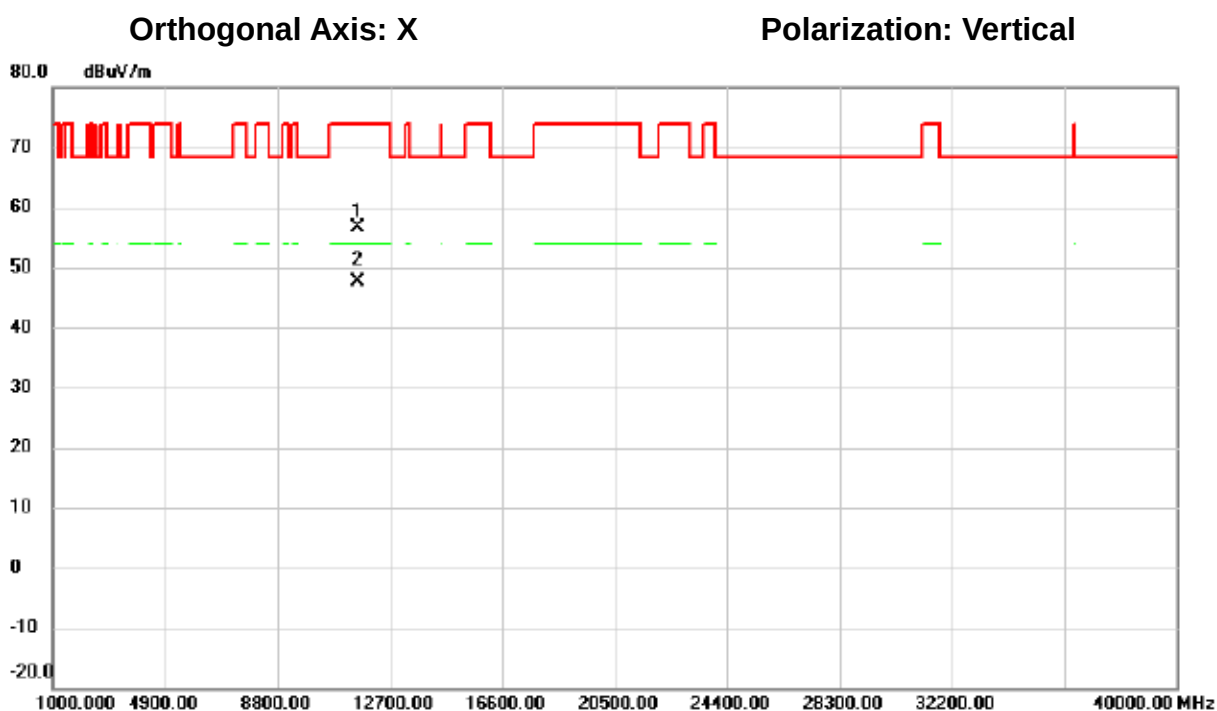

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11592.300	40.20	16.48	56.68	74.00	-17.32	peak	
2	*	11593.420	31.11	16.48	47.59	54.00	-6.41	AVG	

測試頻道: IEEE 802.11ac (40 MHz) / 5795 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢測器: Peak/AV


測試日期: 107/05/03

環境溫度: 25 °C

環境濕度: 62%

Orthogonal Axis: X

Polarization: Horizontal

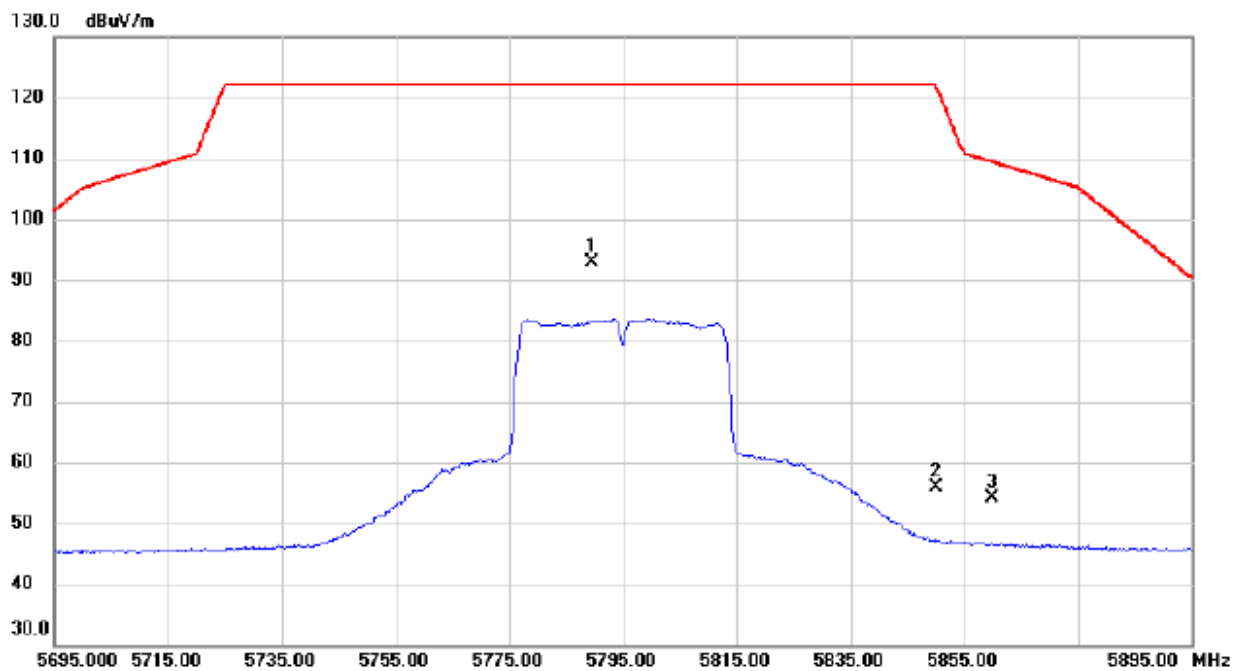

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	5789.500	53.94	39.05	92.99	122.20	-29.21	peak	
2		5850.000	16.66	39.17	55.83	122.20	-66.37	peak	
3		5860.000	14.84	39.18	54.02	109.40	-55.38	peak	

測試頻道: IEEE 802.11ac (40 MHz) / 5795 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna


測試距離: 3 米

檢測器: Peak/AV

測試日期: 107/05/03

環境溫度: 25 °C


環境濕度: 62%

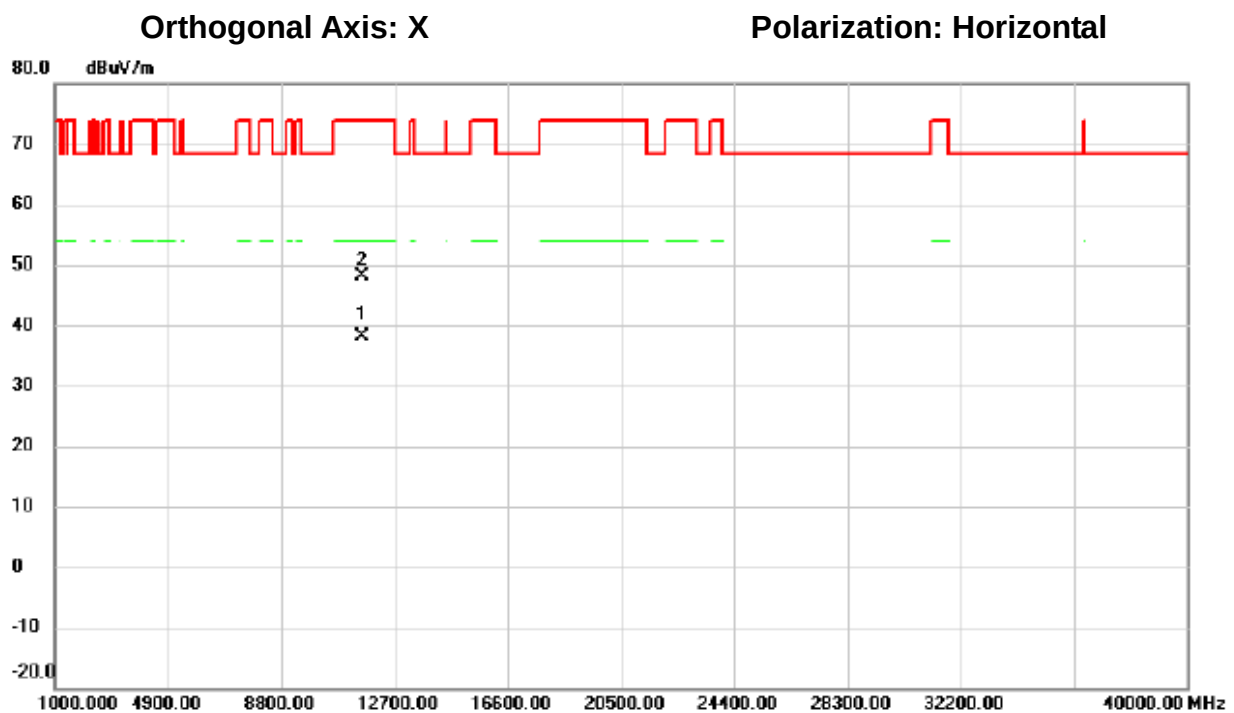

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	11590.100	21.71	16.49	38.20	54.00	-15.80	AVG	
2		11591.000	31.57	16.48	48.05	74.00	-25.95	peak	

測試頻道: IEEE 802.11ac (80 MHz) /
 5775 MHz
 解析頻寬: 1000 kHz / 1000 kHz
 量測天線: Horn Antenna
 檢測器: Peak/AV
 環境溫度: 25°C


測試模式: 發射
 視頻頻寬: 1000 kHz / 10 Hz
 測試距離: 3 米
 測試日期: 107/05/03
 環境濕度: 62%

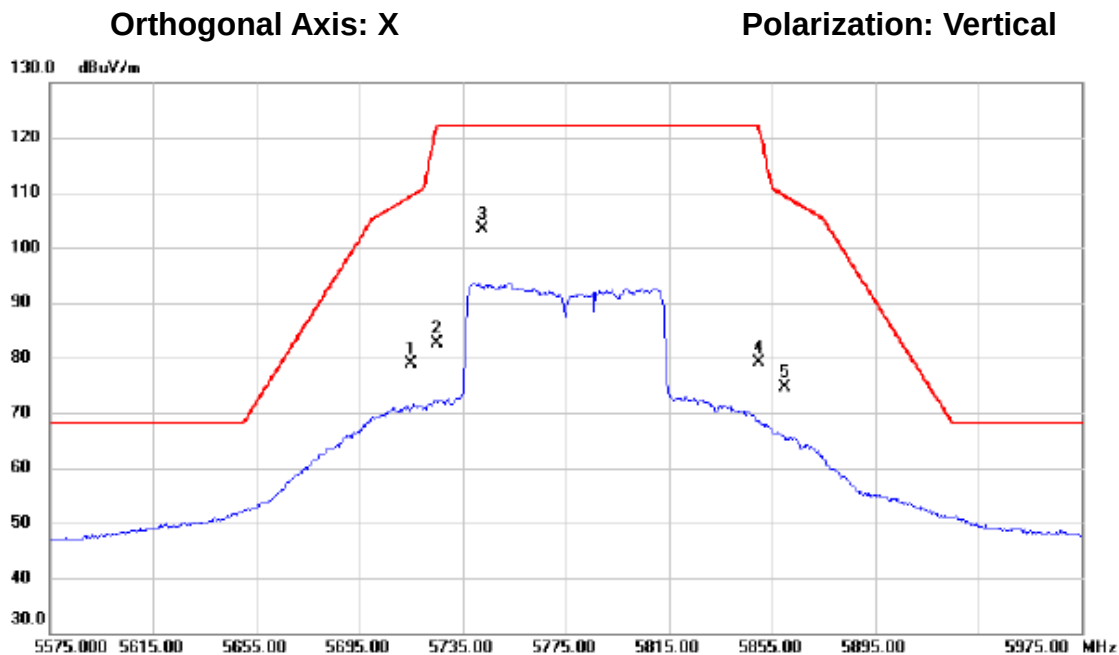

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5715.000	39.97	38.91	78.88	109.40	-30.52	peak	
2		5725.000	43.78	38.93	82.71	122.20	-39.49	peak	
3	*	5742.800	64.37	38.96	103.33	122.20	-18.87	peak	
4		5850.000	40.08	39.17	79.25	122.20	-42.95	peak	
5		5860.000	35.50	39.18	74.68	109.40	-34.72	peak	

測試頻道: IEEE 802.11ac (80 MHz) /
 5775 MHz
 解析頻寬: 1000 kHz / 1000 kHz
 量測天線: Horn Antenna
 檢測器: Peak/AV
 環境溫度: 25°C

測試模式: 發射
 視頻頻寬: 1000 kHz / 10 Hz
 測試距離: 3 米
 測試日期: 107/05/03
 環境濕度: 62%

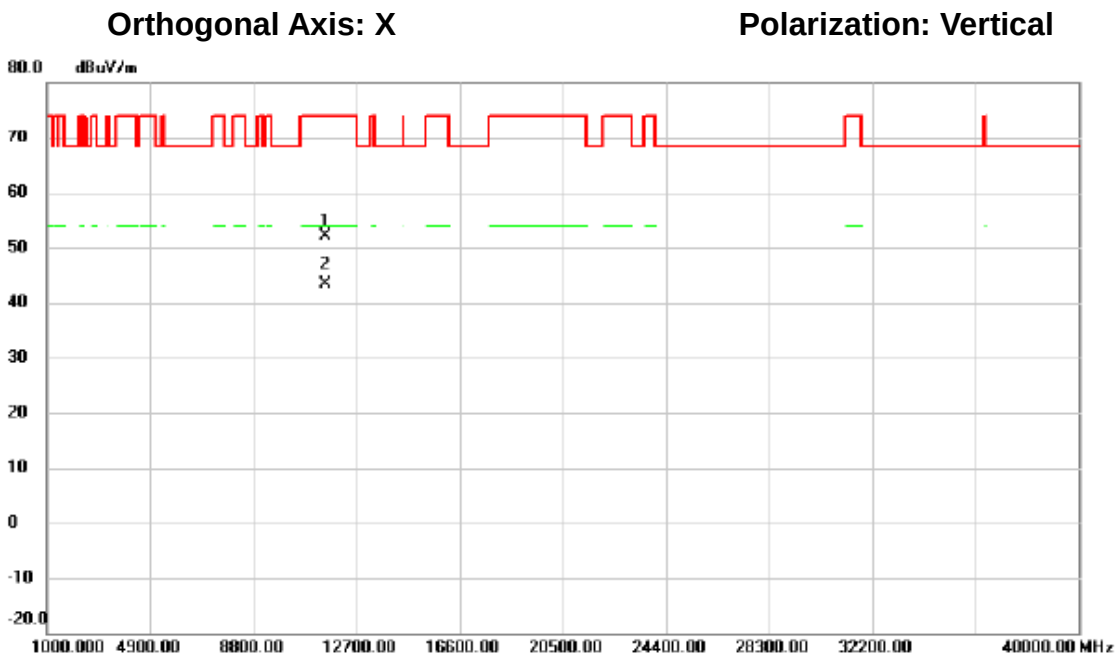

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11541.250	35.41	16.63	52.04	74.00	-21.96	peak	
2	*	11550.050	26.70	16.61	43.31	54.00	-10.69	AVG	

測試頻道: IEEE 802.11ac (80 MHz) / 5775 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢測器: Peak/AV


測試日期: 107/05/03

環境溫度: 25°C

環境濕度: 62%

Orthogonal Axis: X


Polarization: Horizontal

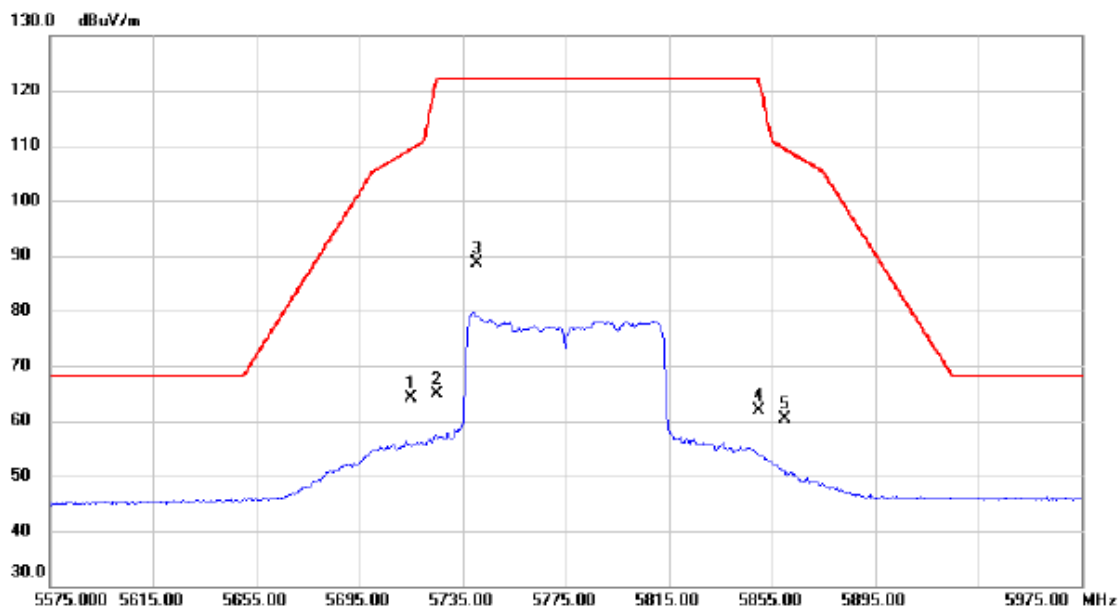

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5715.000	25.12	38.91	64.03	109.40	-45.37	peak	
2		5725.000	25.88	38.93	64.81	122.20	-57.39	peak	
3	*	5740.400	49.73	38.96	88.69	122.20	-33.51	peak	
4		5850.000	22.65	39.17	61.82	122.20	-60.38	peak	
5		5860.000	21.10	39.18	60.28	109.40	-49.12	peak	

測試頻道: IEEE 802.11ac (80 MHz) /
 5775 MHz
 解析頻寬: 1000 kHz / 1000 kHz
 量測天線: Horn Antenna
 檢測器: Peak/AV
 環境溫度: 25°C


測試模式: 發射
 視頻頻寬: 1000 kHz / 10 Hz
 測試距離: 3 米
 測試日期: 107/05/03
 環境濕度: 62%

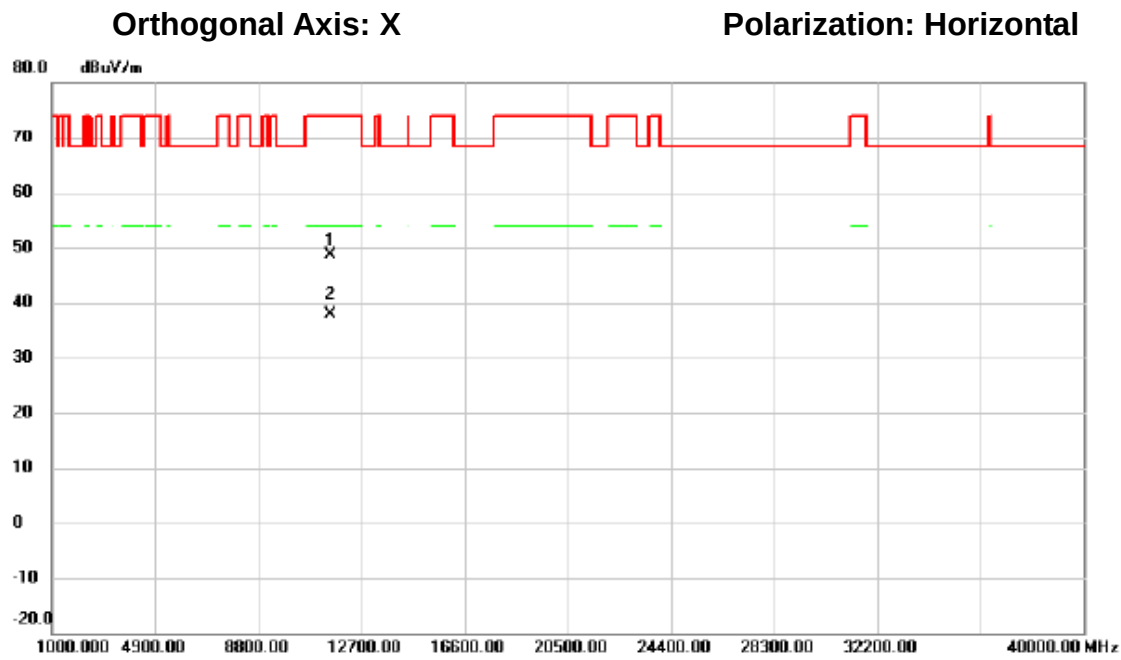

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11548.550	32.07	16.61	48.68	74.00	-25.32	peak	
2	*	11549.450	21.17	16.61	37.78	54.00	-16.22	AVG	

測試頻道: IEEE 802.11a
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢測器: Peak/AV
環境溫度: 24 °C


測試模式: 接收
視頻頻寬: 1000 kHz / 10 Hz
測試距離: 3 米
測試日期: 107/05/03
環境濕度: 52%

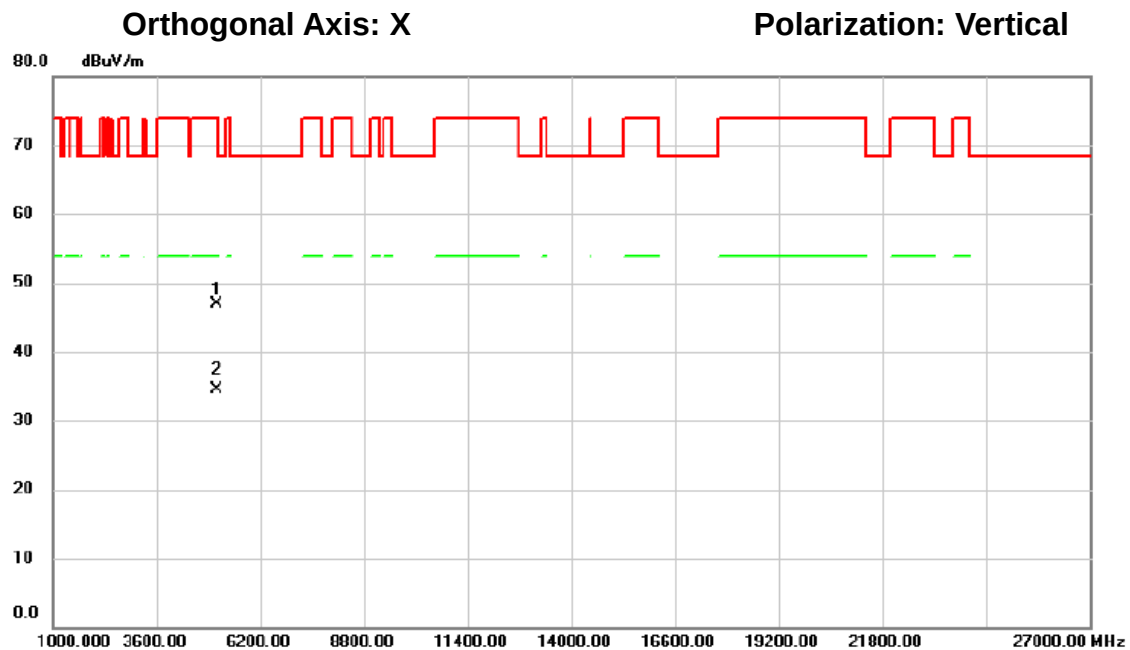

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		5108.000	42.60	4.28	46.88	74.00	-27.12	peak	
2	*	5108.000	30.19	4.28	34.47	54.00	-19.53	AVG	

測試頻道: IEEE 802.11a
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢測器: Peak/AV
環境溫度: 24 °C

測試模式: 接收
視頻頻寬: 1000 kHz / 10 Hz
測試距離: 3 米
測試日期: 107/05/03
環境濕度: 52%

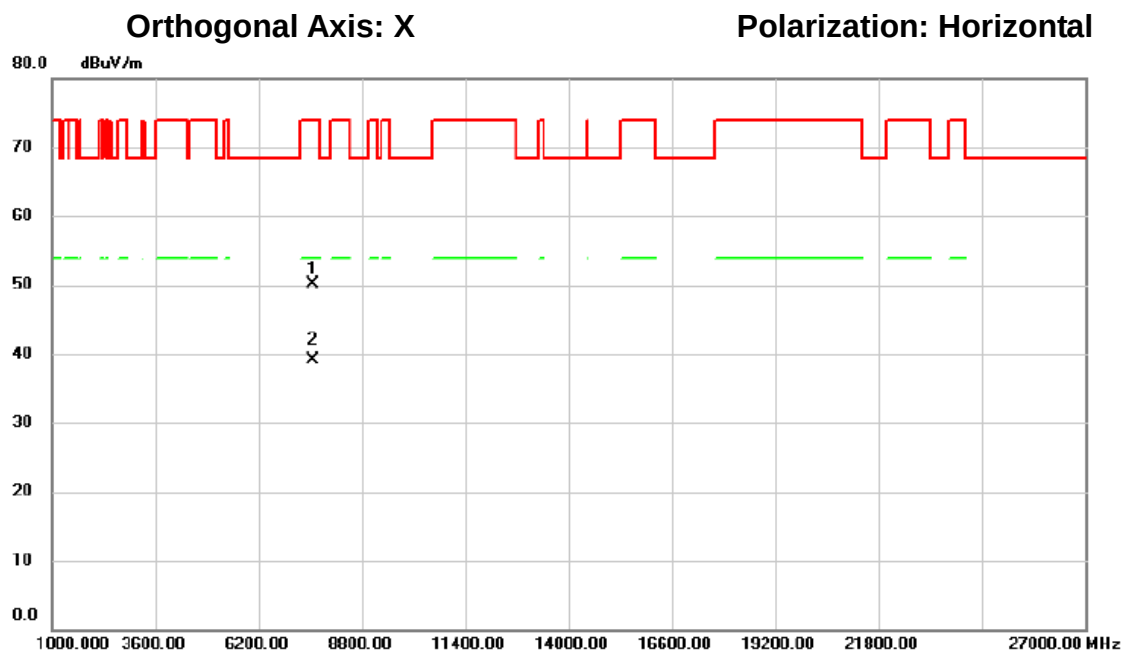

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		7578.000	39.88	10.22	50.10	74.00	-23.90	peak	
2	*	7578.000	28.93	10.22	39.15	54.00	-14.85	AVG	