

NCC

低功率射頻器材型式試驗報告

產品名稱(中) : ACCESS POINT
型號 : APIN0635
廠牌 :  
申請者 : Hewlett Packard Enterprise Company
申請者地址 : 3333 Scott Blvd, Santa Clara, CA 95054, USA
測試標準 : LP0002 (109 年版)
參考法規 : ANSI C63.10-2013
測試結果 : 符合
接收日期 : 2021.01.13
測試日期 : 2021.01.22 ~ 2021.09.14

測試工程師

: 
(許丞哲)

報告審核人

: 
(陳柏均)

報告簽署人

: 
(柯承志)



修訂紀錄

報告編號	版本	描述	發行日期
2101TW0003-T2	1.0	Original Report	2021-09-23

CONTENTS

Description	Page
1. 一般資訊.....	5
2. 產品描述.....	6
2.1 產品資訊.....	6
2.2 產品規格.....	7
2.3 測試模式.....	7
2.5 產品濾波器描述.....	8
2.6 測試配置.....	9
2.7 測試周邊.....	9
2.8 操作程序.....	9
3. 測試設備明細.....	10
4. 量測不確定度.....	11
5. 測試結果.....	12
5.1.1 量測方法.....	13
5.1.2 限制要求.....	13
5.1.3 測試架構圖.....	13
5.1.4 電源傳導測試結果.....	14
5.2.1 量測方法.....	16
5.2.2 限制要求.....	16
5.2.3 測試架構圖.....	16
5.2.4 峰值傳導輸出功率測試結果.....	17
5.3 天線之要求.....	19
5.3.1 限制要求.....	19
5.3.2 天線樣式.....	19
5.4 帶外發射限制.....	20
5.4.1 量測方法.....	20
5.4.2 限制要求.....	20
5.4.3 測試架構圖.....	20
5.4.4 帶外輻射測試結果.....	21
5.5 輻射電場強度.....	27
5.5.1 量測方法.....	27
5.5.2 限制要求.....	28
5.5.3 測試架構圖.....	29
5.5.4 輻射電場強度測試結果.....	31
5.6 頻帶邊緣.....	53

5.6.1 量測方法	53
5.6.2 限制要求	53
5.6.4 頻帶邊緣測試結果	55
5.7. 占用頻寬	79
5.7.1 量測方法	79
5.7.2 限制要求	79
5.7.3 測試架構圖	79
5.7.4 占用頻寬測試結果	80
5.8. 功率頻譜密度	82
5.8.1 量測方法	82
5.8.2 限制要求	82
5.8.3 測試架構圖	82
5.8.4 功率頻譜密度測試結果	83

1. 一般資訊

申請者	Hewlett Packard Enterprise Company
申請者地址	3333 Scott Blvd, Santa Clara, CA 95054, USA
製造商	Hewlett Packard Enterprise Company
製造商地址	3333 Scott Blvd, Santa Clara, CA 95054, USA
實驗室	台灣曼瑞檢測科技有限公司
實驗室地址	33377 台灣桃園市龜山區復興二路 38 號
實驗室資訊	1. MRT facility is a FCC registered (Reg. No. 291082) test facility with the site description report on file and is designated by the FCC as an Accredited Test Firm. 2. MRT facility is an IC registered (MRT Reg. No. 21723) test laboratory with the site description on file at Industry Canada. 3. MRT Lab is accredited to ISO 17025 by the Taiwan Accreditation Foundation (TAF Cert. No. 3261) in EMC, Telecommunications and Radio testing for FCC (Designation Number: TW3261), Industry Taiwan, EU and TELEC Rules.
實驗室測試環境條件	溫度 (°C) : 20-35 / 濕度 (%RH) : 30-65

2. 產品描述

2.1 產品資訊

產品名稱	ACCESS POINT
產品型號	APIN0635
待測物額定電壓	AC Adapter or PoE input
無線規格	v5.0 single mode, BLE only
頻率範圍	2402 ~ 2480MHz
通道數量	40
調變模式	GFSK
傳輸速率	1Mbps & 2Mbps
頻道控制	Auto

2.2 產品規格

Type of modulation	GFSK
Data Rate	1Mbps (GFSK) 2Mbps (GFSK)

V5.0 LE

Channel	Frequency	Channel	Frequency	Channel	Frequency
00	2402 MHz	01	2404 MHz	02	2406 MHz
03	2408 MHz	04	2410 MHz	05	2412 MHz
06	2414 MHz	07	2416 MHz	08	2418 MHz
09	2420 MHz	10	2422 MHz	11	2424 MHz
12	2426 MHz	13	2428 MHz	14	2430 MHz
15	2432 MHz	16	2434 MHz	17	2436 MHz
18	2438 MHz	19	2440 MHz	20	2442 MHz
21	2444 MHz	22	2446 MHz	23	2448 MHz
24	2450 MHz	25	2452 MHz	26	2454 MHz
27	2456 MHz	28	2458 MHz	29	2460 MHz
30	2462 MHz	31	2464 MHz	32	2466 MHz
33	2468 MHz	34	2470 MHz	35	2472 MHz
36	2474 MHz	37	2476 MHz	38	2478 MHz
39	2480 MHz	N/A	N/A	N/A	N/A

2.3 測試模式

Test Mode	Mode 1: 發射器 - 1Mbps(LE)
	Mode 2: 發射器 - 2Mbps(LE)


2.5 產品濾波器描述

Filter	Specification	Remark
Wi-Fi		
Filter 1#	Band Pass Filter (2412-2472)	Allowing any transmission on all channels
Filter 2#	Band Pass Filter (2402-2447)	Allowing any transmission on 20MHz channels 1 thru 6.
Filter 3#	Band Pass Filter (2452-2472)	Allowing any transmission on 20MHz channel 11
Bluetooth & Zigbee		
Filter 4#	Band Pass Filter (2402-2480)	Allowing any transmission on all channels
Filter 5#	Band Pass Filter (2402-2430)	Allowing transmission on BLE channels 37 (2402MHz) and 38 (2426MHz) and Zigbee channel 11 (2405MHz)
Filter 6#	Band Pass Filter (2478-2482)	Allowing transmission on BLE channel 39 (2480MHz) and Zigbee channel 26 (2480MHz)

Working Mode

Wi-Fi	Bluetooth	Remark
Filter 1#	Filter 4#	Filter 1# or Filter 4# work alone
Filter 2#	Filter 6#	Transmission simultaneously
Filter 3#	Filter 5#	Transmission simultaneously
Note: Filter groups on the 2.4GHz Wi-Fi and BLE/Zigbee outputs to prevent reverse IMD when both 2.4GHz Wi-Fi and BLE/Zigbee are transmitting simultaneously		

2.6 測試配置

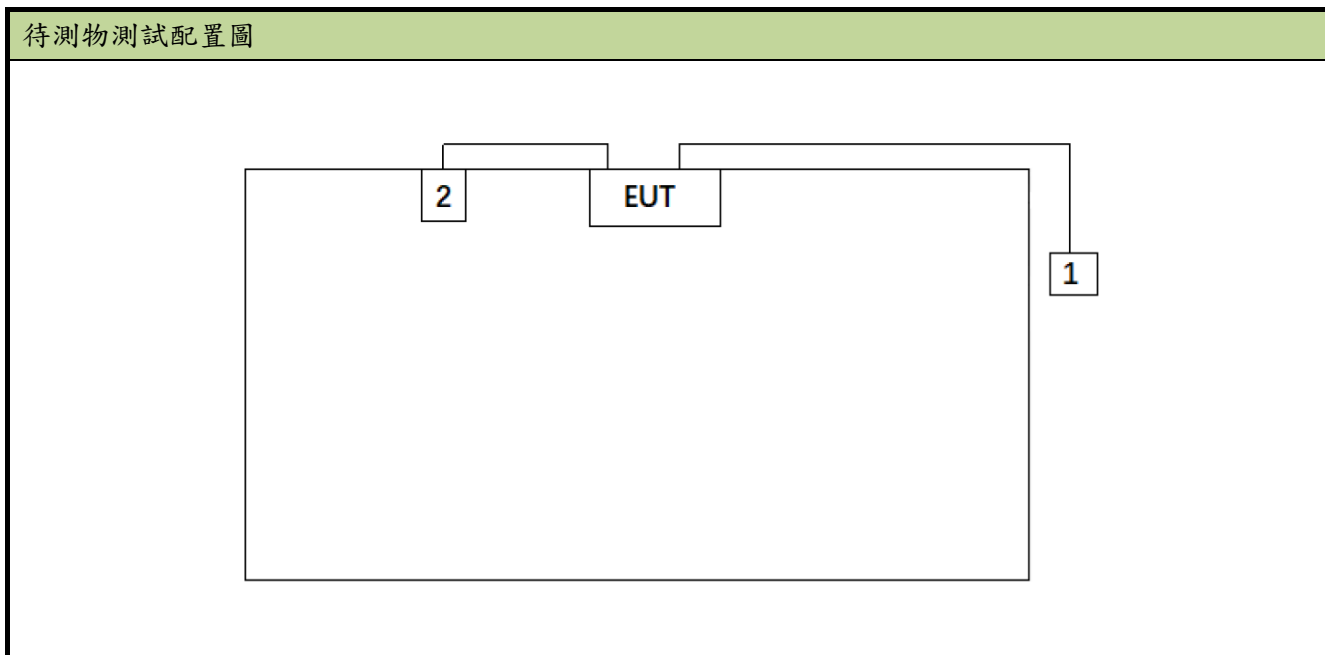

2.7 測試周邊

待測裝置測試時，其搭配系統測試時之週邊裝置包括如下：

	Product	Manufacturer	Model No.
1	Notebook	DELL	Precision 3510
2	AC Adapter	aruba	DB-48A12

2.8 操作程序

1.	Turn on the power of all equipment.
2.	Execute "Telnet" program
3.	Configure the test channel and the data rate.
4.	Start test.

3. 測試設備明細

電源傳導 – SR2

儀器名稱	廠牌	型號	財產編號	校正年限	校正有效日期
Two-Line V-Network	R&S	ENV216	MRTTWA00019	1 year	2022/3/23
Cable	Rosinol	N1C50-RG400- B1C50-500CM	MRTTWE00013	1 year	2022/6/20
EMI Test Receiver	R&S	ESR3	MRTTWA00009	1 year	2022/3/24

輻射干擾 – AC1

儀器名稱	廠牌	型號	財產編號	校正年限	校正有效日期
Broadband TRILOG Antenna	SCHWARZBECK	VULB 9162	MRTTWA00001	1 year	2021/10/5
EMI Test Receiver	R&S	ESR3	MRTTWA00009	1 year	2022/3/24
Active Loop Antenna	Schwarzbeck	FMZB 1519B	MRTTWA00002	1 year	2022/5/6
Broadband Horn antenna	SCHWARZBECK	BBHA 9120D	MRTTWA00003	1 year	2022/4/21
Breitband Hornantenna	Schwarzbeck	BBHA 9170	MRTTWA00004	1 year	2022/4/28
Broadband Amplifier	Schwarzbeck	BBV 9721	MRTTWA00006	1 year	2022/4/26
Broadband Preamplifier	SCHWARZBECK	BBV 9718	MRTTWA00005	1 year	2022/4/21
Cable	HUBERSUHNER	SF106	MRTTWE00010	1 year	2022/6/15

傳導量測設備 –SR2

儀器名稱	廠牌	型號	財產編號	校正年限	校正有效日期
EXA Signal Analyzer	KEYSIGHT	N9010A	MRTTWA00012	1 year	2021/10/14
EXA Signal Analyzer	KEYSIGHT	N9010B	MRTTWA00074	1 year	2022/7/19
X-Series USB Peak and Average Power Sensor	KEYSIGHT	U2021XA	MRTTWA00015	1 year	2022/3/24

EMI 測試軟體

軟體名稱	廠牌	版本
e3	Audix	9.160520a
EMI	Quietek	V3

4. 量測不確定度

電源傳導量測-電源線 (Conducted Emission- Power Line)
Measuring Uncertainty for a Level of Confidence of 95% ($U=2U_c(y)$): 0.15MHz~30MHz: $\pm 2.53\text{dB}$
輻射干擾量測 (Radiated Spurious Emission)
Measuring Uncertainty for a Level of Confidence of 95% ($U=2U_c(y)$): 9kHz~30MHz: $\pm 3.92\text{dB}$ 30MHz~1GHz: $\pm 4.25\text{dB}$ 1GHz~18GHz: $\pm 4.40\text{dB}$ 18GHz~40GHz: $\pm 4.45\text{dB}$
頻率誤差量測 (Frequency Error)
Measuring Uncertainty for a Level of Confidence of 95% ($U=2U_c(y)$): $\pm 78.4\text{Hz}$
傳導功率量測 (Conducted Power)
Measuring Uncertainty for a Level of Confidence of 95% ($U=2U_c(y)$): $\pm 0.84\text{dB}$
傳導干擾量測 (Conducted Spurious Emission)
Measuring Uncertainty for a Level of Confidence of 95% ($U=2U_c(y)$): $\pm 2.65\text{ dB}$
佔用頻寬量測 (Occupied Bandwidth)
Measuring Uncertainty for a Level of Confidence of 95% ($U=2U_c(y)$): 3.3%
溫度 / 濕度 (Temp. / Humidity)
Measuring Uncertainty for a Level of Confidence of 95% ($U=2U_c(y)$): $\pm 0.82^\circ\text{C}/ \pm 3\%$
直流電源 (DC Voltage)
Measuring Uncertainty for a Level of Confidence of 95% ($U=2U_c(y)$): $\pm 0.3\%$

5. 測試結果


法規章節	量測項目	限制值	測試結果	測試數據
3.3	電源傳導	低功率射頻器材技術規範 3.3 節	符合	第 5.1 章節
4.10.1.2	峰值傳導輸出功率	$\leq 30.00\text{dBm}$	符合	第 5.2 章節
4.10.1.3	天線之要求	低功率射頻器材技術規範 4.10.1.3 節	符合	第 5.3 章節
4.10.1.5	帶外發射限制	$\leq 20\text{dBc(Peak)}$	符合	第 5.4 章節
3.6	輻射電場強度	低功率射頻器材技術規範 3.6 節	符合	第 5.5 章節
3.5	頻帶邊緣	$\leq 74\text{dBuV/m(Peak)}$ $\leq 54\text{dBuV/m(Average)}$	符合	第 5.6 章節
4.10.1.6(2)(A)	占用頻寬	$\geq 500\text{KHz}$	符合	第 5.7 章節
4.10.1.6(2)(B)	功率頻譜密度	$\leq 8\text{dBm}$	符合	第 5.8 章節

備註：符合性的判定是基於測試結果符合規範的限制值或客戶的宣告要求，測試結果的判定是不考慮測量不確定度的值。

Test Items	Filter 4#	Filter 5#	Filter 6#
占用頻寬	●		
峰值傳導輸出功率	●	●	●
功率頻譜密度	●		
帶外發射限制	●	●	●
輻射電場強度	●	●	●
頻帶邊緣	●	●	●
電源傳導	●		

5.1.4 電源傳導測試結果

EUT	ACCESS POINT	Date of Test	2021-04-27
Factor	CE_ENV216-L1 (Filter ON)	Temp. / Humidity	23.6°C/60.9%
Polarity	Line1	Site / Test Engineer	SR2 / Eric Lin
Test Mode	Transmit by BLE at channel 2442MHz - 1Mbps	Test Voltage	110V/60Hz

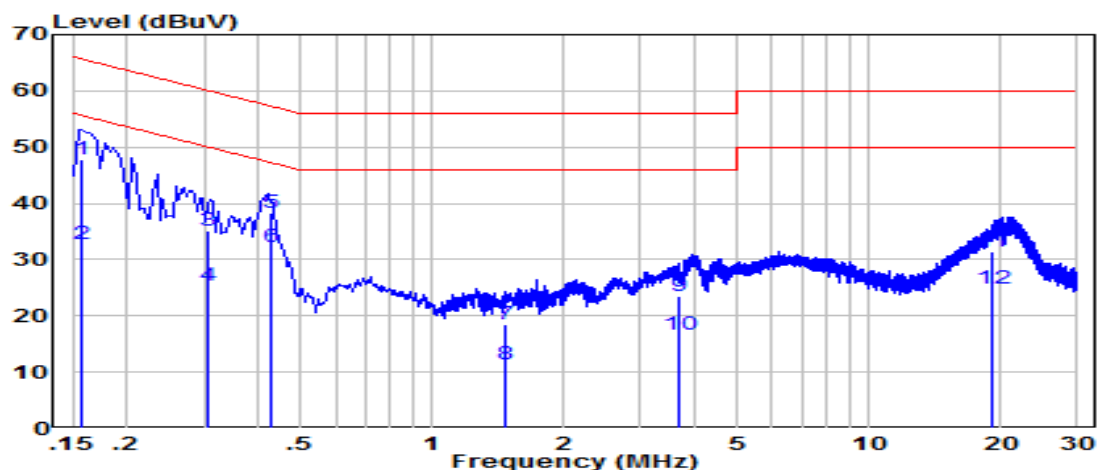


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	0.158	38.33	9.61	47.94	-17.63	65.57	QP
2	0.158	23.23	9.61	32.84	-22.73	55.57	Average
3	0.306	25.45	9.62	35.07	-25.00	60.08	QP
4	0.306	15.75	9.62	25.37	-24.70	50.08	Average
5	0.426	28.56	9.63	38.19	-19.14	57.33	QP
6	* 0.426	22.66	9.63	32.29	-15.04	47.33	Average
7	1.460	8.79	9.67	18.46	-37.54	56.00	QP
8	1.460	1.59	9.67	11.26	-34.74	46.00	Average
9	3.650	13.82	9.71	23.53	-32.47	56.00	QP
10	3.650	6.92	9.71	16.63	-29.37	46.00	Average
11	19.180	21.43	9.98	31.41	-28.59	60.00	QP
12	19.180	14.93	9.98	24.91	-25.09	50.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = LISN Factor (dB)+ Cable Loss (dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-04-27
Factor	CE_ENV216-N (Filter ON)	Temp. / Humidity	23.6°C/60.9%
Polarity	Neutral	Site / Test Engineer	SR2 / Eric Lin
Test Mode	Transmit by BLE at channel 2442MHz - 1Mbps	Test Voltage	110V/60Hz

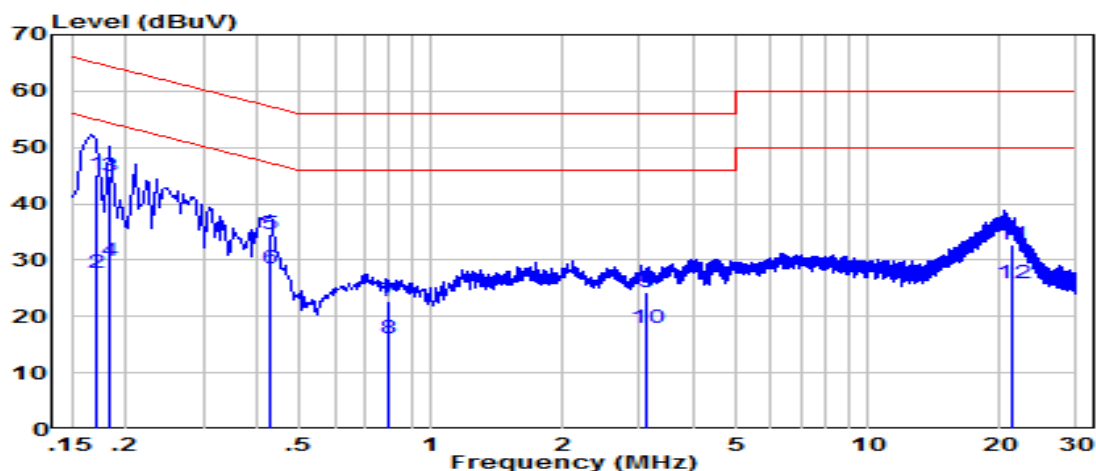

No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	0.170	35.43	9.62	45.05	-19.91	64.96	QP
2	0.170	18.23	9.62	27.85	-27.11	54.96	Average
3	0.182	35.23	9.62	44.85	-19.54	64.39	QP
4	0.182	20.13	9.62	29.75	-24.64	54.39	Average
5	0.425	25.05	9.64	34.69	-22.66	57.35	QP
6	*	0.425	18.85	28.49	-18.86	47.35	Average
7	0.797	12.98	9.66	22.64	-33.36	56.00	QP
8	0.797	6.38	9.66	16.04	-29.96	46.00	Average
9	3.120	14.70	9.71	24.41	-31.59	56.00	QP
10	3.120	8.20	9.71	17.91	-28.09	46.00	Average
11	21.340	22.63	10.09	32.72	-27.28	60.00	QP
12	21.340	15.93	10.09	26.02	-23.98	50.00	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = LISN Factor (dB)+ Cable Loss (dB).
- Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).

5.2 峰值傳導輸出功率

5.2.1 量測方法

待測物之天線埠經由適當之衰減直接連至頻譜分析儀RF輸入端，設定頻譜分析儀之解析度頻寬大於6dB發射頻寬或使用峰值功率表。除使用上述測量方式外，並得使用以最大傳導輸出功率作為測量方式。

5.2.2 限制要求


操作於2400-2483.5 MHz之跳頻或數位調變的發射器材與5725-5850 MHz之跳頻發射器材：1W(含)以下，當跳頻系統符合國家通訊傳播委員會低功率射頻器材技術規範之第4.10.1.6(1)(A)(a)節，其限制值為0.125 W(含)以下。

若用於非固定式點對點操作時，若其發射天線之方向性增益超過6dBi，應依所超過之dB數等量降低峰值輸出功率。如用於固定式點對點(註)操作時，應符合下列情形之一：

(1)操作於2400-2483.5兆赫(MHz)者，其發射天線之方向性增益超過6dBi，應於每超過3dB降低1dB之峰值輸出功率。

(2) 操作於5725-5850兆赫(MHz)者，其發射天線之方向性增益超過6dBi，不需降低峰值輸出功率。

5.2.3 測試架構圖

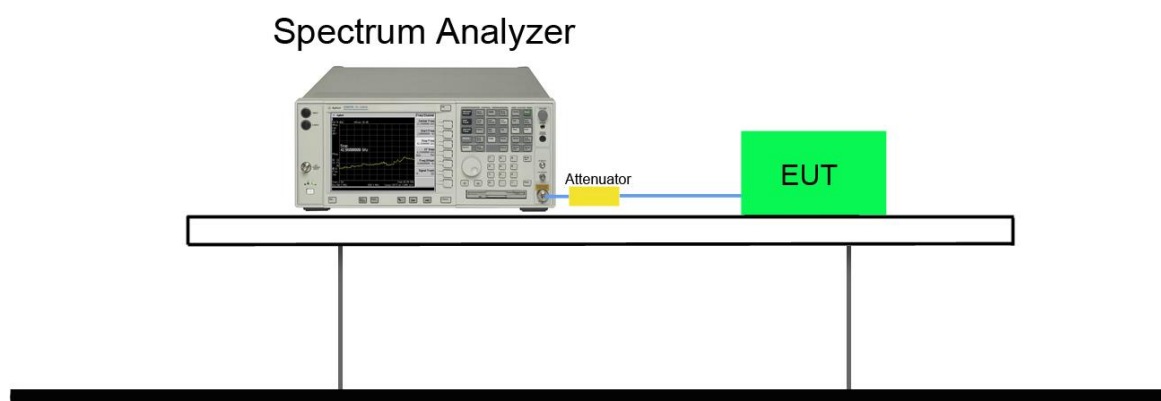

5.2.4 峰值傳導輸出功率測試結果

待測物名稱	ACCESS POINT	測試日期	2021/1/22
待測物型號	APIN0635	溫度 / 濕度	23°C / 55%
測試場地 / 測試工程師	SR2 / Eric	測試模式	Filter 4#

Test Result of Peak Output Power

Test Mode	Data Rate (Mbps)	Channel No.	Frequency (MHz)	Peak Power (dBm)	Limit (dBm)	Result
BLE	1	00	2402	6.60	≤ 30.00	Pass
BLE	1	20	2442	6.59	≤ 30.00	Pass
BLE	1	39	2480	6.51	≤ 30.00	Pass
BLE	2	00	2402	6.61	≤ 30.00	Pass
BLE	2	20	2442	6.59	≤ 30.00	Pass
BLE	2	39	2480	6.50	≤ 30.00	Pass

Test Result of Average Output Power (Reporting Only)

Test Mode	Data Rate (Mbps)	Channel No.	Frequency (MHz)	Average Power (dBm)	Limit (dBm)	Result
BLE	1	00	2402	6.52	≤ 30.00	Pass
BLE	1	20	2442	6.50	≤ 30.00	Pass
BLE	1	39	2480	6.42	≤ 30.00	Pass
BLE	2	00	2402	4.44	≤ 30.00	Pass
BLE	2	20	2442	4.47	≤ 30.00	Pass
BLE	2	39	2480	4.38	≤ 30.00	Pass

待測物名稱	ACCESS POINT	測試日期	2021/1/22
待測物型號	APIN0635	溫度 / 濕度	23°C / 55%
測試場地 / 測試工程師	SR2 / Eric	測試模式	Filter 5#

Test Result of Peak Output Power

Test Mode	Data Rate (Mbps)	Channel No.	Frequency (MHz)	Peak Power (dBm)	Limit (dBm)	Result
BLE	1	00	2402	5.91	≤ 30.00	Pass
BLE	2	00	2402	5.93	≤ 30.00	Pass

Test Result of Average Output Power (Reporting Only)

Test Mode	Data Rate (Mbps)	Channel No.	Frequency (MHz)	Average Power (dBm)	Limit (dBm)	Result
BLE	1	00	2402	5.82	≤ 30.00	Pass
BLE	2	00	2402	3.79	≤ 30.00	Pass

待測物名稱	ACCESS POINT	測試日期	2021/1/22
待測物型號	APIN0635	溫度 / 濕度	23°C / 55%
測試場地 / 測試工程師	SR2 / Eric	測試模式	Filter 4#

Test Result of Peak Output Power

Test Mode	Data Rate (Mbps)	Channel No.	Frequency (MHz)	Peak Power (dBm)	Limit (dBm)	Result
BLE	1	39	2480	4.46	≤ 30.00	Pass
BLE	2	39	2480	4.47	≤ 30.00	Pass

Test Result of Average Output Power (Reporting Only)

Test Mode	Data Rate (Mbps)	Channel No.	Frequency (MHz)	Average Power (dBm)	Limit (dBm)	Result
BLE	1	39	2480	4.33	≤ 30.00	Pass
BLE	2	39	2480	2.30	≤ 30.00	Pass

5.3 天線之要求

5.3.1 限制要求

依據國家通訊傳播委員會低功率射頻器材技術規範之第4.10.1.4節規定，天線之規格可不受下述規定之限制。

低功率射頻器材之發射機或收發信機所使用之天線，應為全固定、半固定式或以獨特之耦合(unique coupling)方式連接機體。製造者可設計供使用者因損壞而替換之天線，但不得設計或使用原認證以外之天線或可供引接各類電纜之標準天線插座或電氣連接頭，如：BNC、F type、N type、M type、UG type、RCA、SMA、SMB...等及其他各類工業或通訊標準接頭。

5.3.2 天線樣式

Antenna Type	Frequency Band (GHz)	Max Peak Gain (dBi)	CDD Directional Gain (dBi)		BF Directional Gain (dBi)
			For Power	For PSD	
Wi-Fi Internal Antenna (2*2 MIMO)					
PIFA	2.4 ~ 2.5	2.90	2.90	5.91	5.91
	5.15 ~ 5.9	4.90	4.90	7.91	7.91
	5.9 ~ 7.2	4.30	4.30	4.30	4.30
Bluetooth / ZigBee Internal Antenna					
PIFA	2.4 ~ 2.5	3.0			

Note:

The EUT supports Cyclic Delay Diversity (CDD) mode, and CDD signals are correlated.

For CDD transmissions, directional gain is calculated as follows, $N_{ANT} = 2$, $N_{SS} = 1$.

If all antennas have the same gain, G_{ANT} , Directional gain = $G_{ANT} + \text{Array Gain}$, where Array Gain is as follows.

- For power spectral density (PSD) measurements on all devices,
Array Gain = $10 \log (N_{ANT} / N_{SS})$ dB = 3.01;
- For power measurements on IEEE 802.11 devices,
Array Gain = 0 dB for $N_{ANT} \leq 4$;

5.4 帶外發射限制

5.4.1 量測方法

待測物之天線埠經由適當之衰減直接連至頻譜分析儀 RF 輸入端：


- (1) 頻率掃描範圍足以檢測頻帶內的發射波峰位準以及由受測物產生之最低頻率到第 10 次諧波的所有混附發射，通常需要分幾段以涵蓋全部頻率範圍。
- (2) 解析頻寬為 100 kHz，視訊頻寬不小於解析頻寬。
- (3) 掃描時間為自動，檢波功能為峰值，訊號軌跡為最大保留(Max Hold)。
- (4) 將標記設定於任何欲紀錄之波峰上，所顯示之位準值必須符合指定之限制值。

5.4.2 限制要求

使用頻帶範圍外之任意 100 千赫 (kHz)內，發射器所產生的射頻功率相較於使用頻帶範圍中包含最高所需功率之 100 千赫 (kHz)內的射頻功率，衰減值限制如下：

- (1) 輸出功率以低功率射頻器材技術規範附件二之峰值輸出功率方式量測者，至少須衰減 20 dB，可使用射頻傳導或輻射方式測量。
- (2) 輸出功率以數位調變技術系統之最大傳導輸出功率量測方式者，至少須衰減 30 dB。
- (3) 若落於禁用頻段之輻射發射，應符合低功率射頻器材技術規範第 3.6 節之規定。


5.4.3 測試架構圖

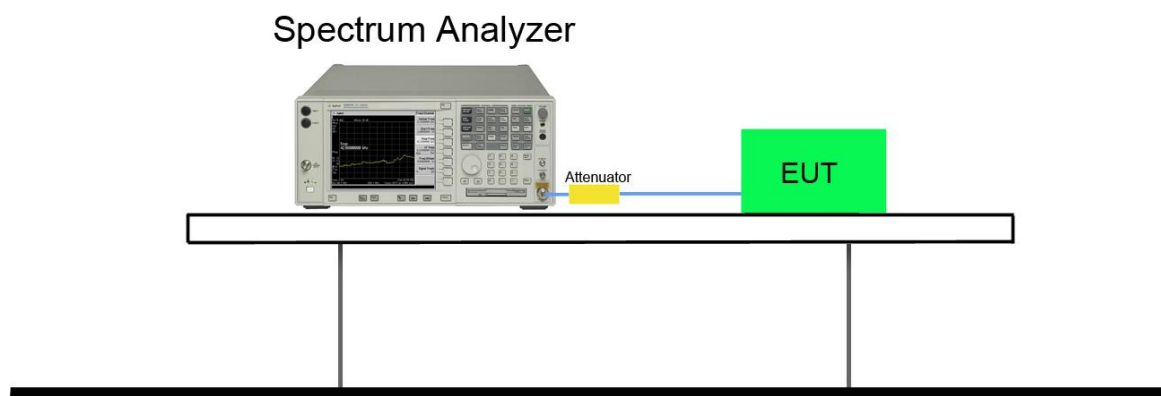

5.4.4 帶外輻射測試結果


待測物名稱	ACCESS POINT	測試日期	2021/1/22
待測物型號	APIN0635	溫度 / 濕度	23°C / 55%
測試場地 / 測試工程師	SR2 / Eric	測試模式	Filter 4#

Test Mode	Channel No.	Frequency (MHz)	Limit	Result
BLE(1Mbps)	00	2402	20dBc	Pass
BLE(1Mbps)	19	2440	20dBc	Pass
BLE(1Mbps)	39	2480	20dBc	Pass
BLE(2Mbps)	00	2402	20dBc	Pass
BLE(2Mbps)	19	2440	20dBc	Pass
BLE(2Mbps)	39	2480	20dBc	Pass

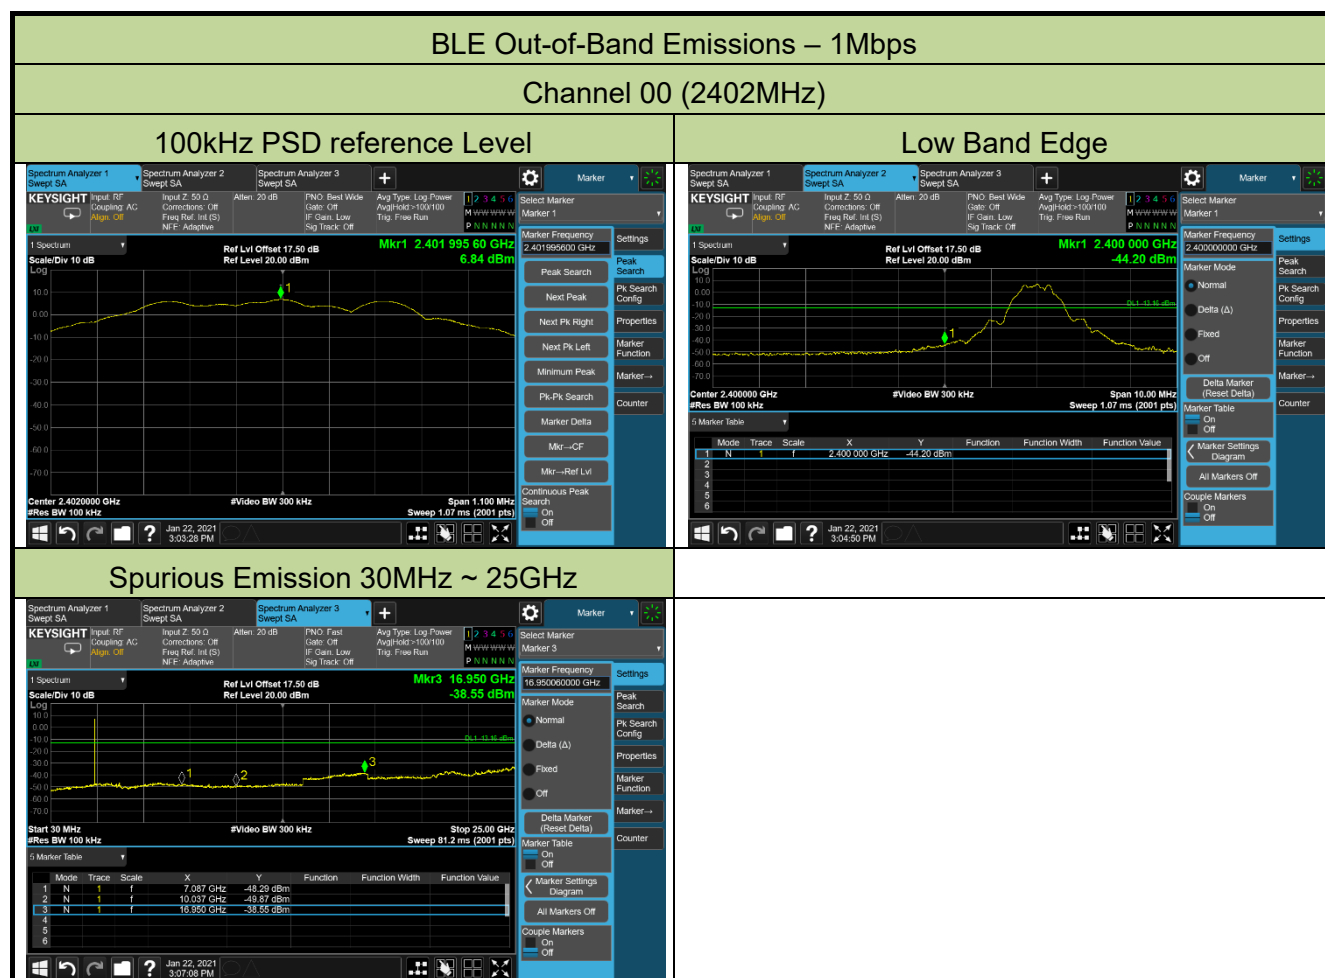

Channel 20 (2442MHz)

100kHz PSD reference Level

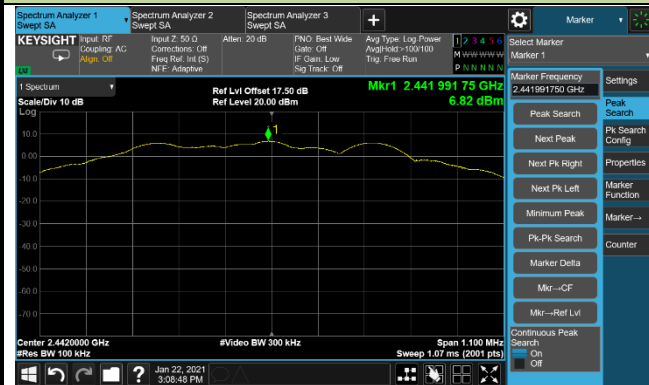


Spurious Emission 30MHz ~ 25GHz




Channel 39 (2480MHz)



100kHz PSD reference Level

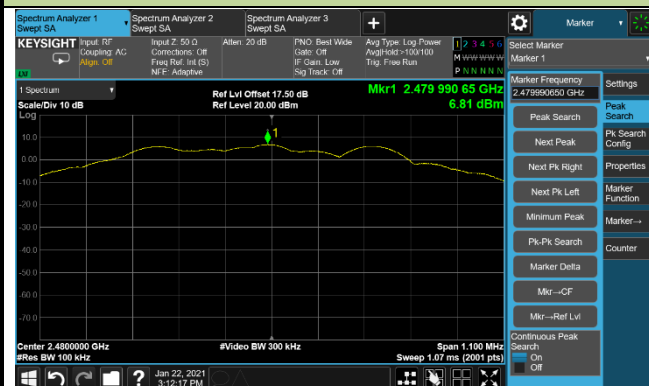

High Band Edge

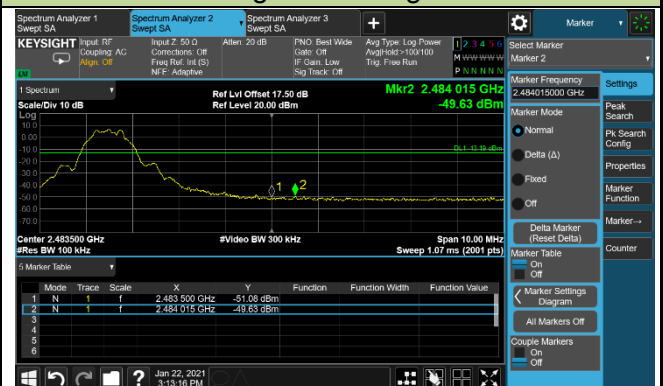


Spurious Emission 30MHz ~ 25GHz

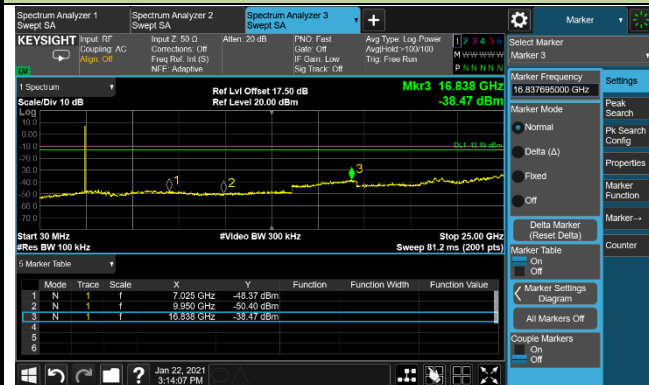


BLE Out-of-Band Emissions – 2Mbps

Channel 00 (2402MHz)


100kHz PSD reference Level

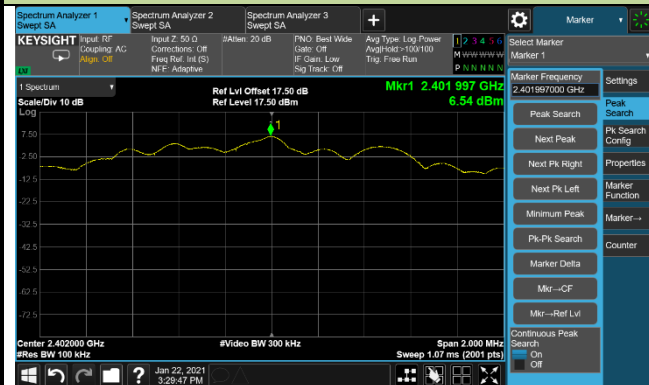

Low Band Edge

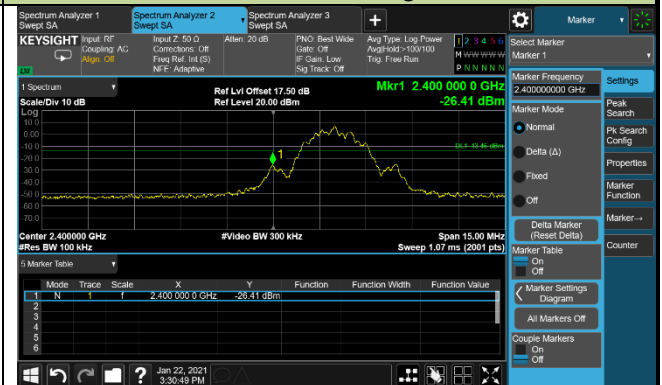


Spurious Emission 30MHz ~ 25GHz

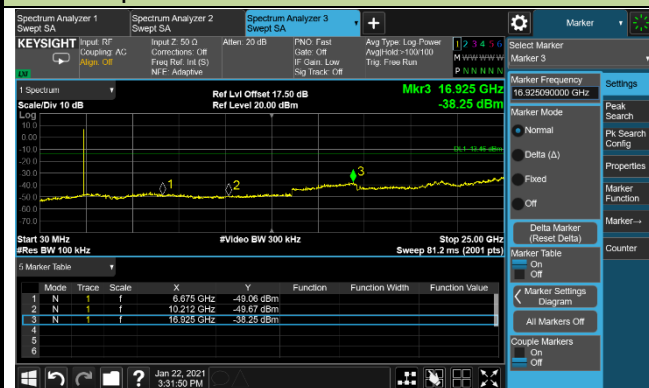


Channel 20 (2442MHz)

100kHz PSD reference Level

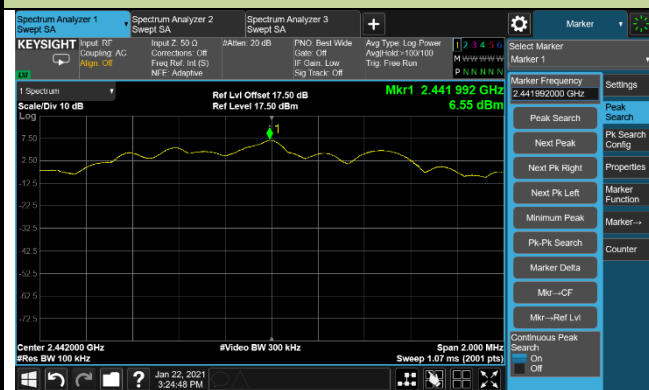


Spurious Emission 30MHz ~ 25GHz

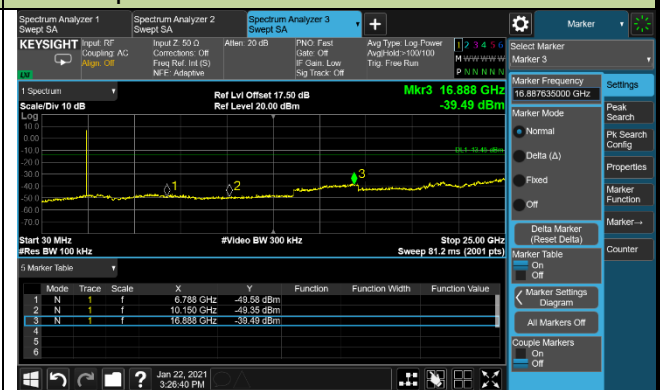


Channel 39 (2480MHz)


100kHz PSD reference Level

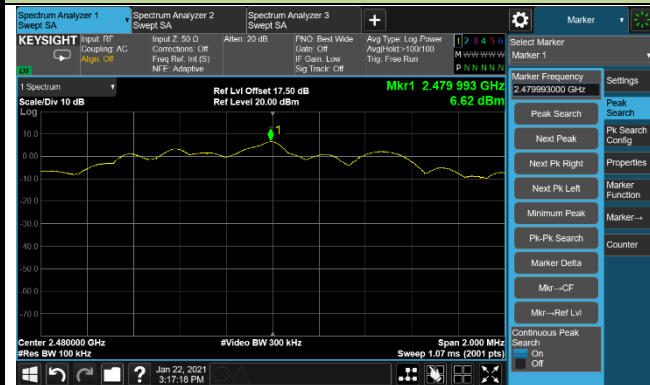

High Band Edge

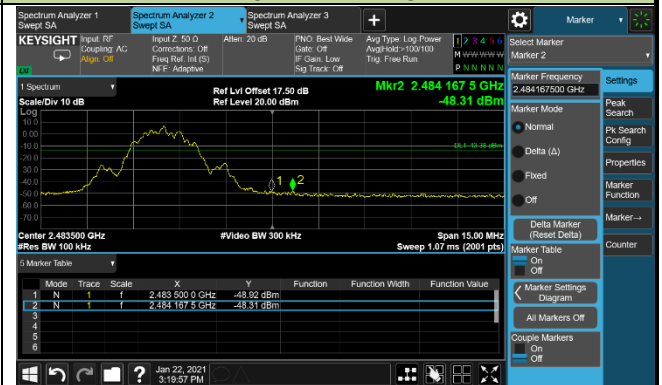

Spurious Emission 30MHz ~ 25GHz

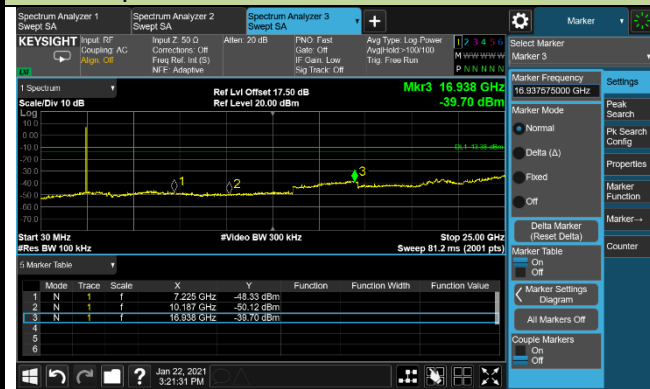


待測物名稱	ACCESS POINT	測試日期	2021/5/08
待測物型號	APIN0635	溫度 / 濕度	23°C / 55%
測試場地 / 測試工程師	SR2 / Eric	測試模式	Filter 5#

Test Mode	Data Rate (Mbps)	Channel No.	Frequency (MHz)	Limit	Result
BLE	2	00	2402	20dBc	Pass

Out-of-Band Emissions Worst Case - 2Mbps

Channel 00 (2402MHz)


100kHz PSD reference Level

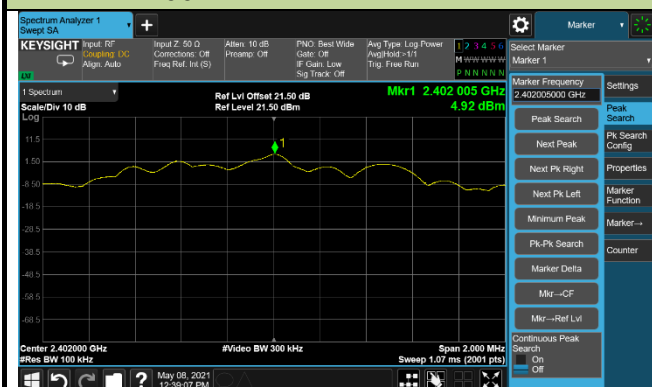

Low Band Edge



Spurious Emission 30MHz ~ 25GHz

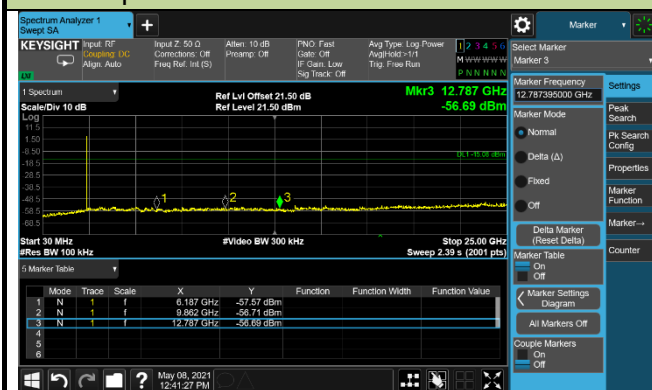


待測物名稱	ACCESS POINT	測試日期	2021/5/8
待測物型號	APIN0635	溫度 / 濕度	23°C / 55%
測試場地 / 測試工程師	SR2 / Eric	測試模式	Filter 6#

Test Mode	Data Rate (Mbps)	Channel No.	Frequency (MHz)	Limit	Result
BLE	2	39	2480	20dBc	Pass

Out-of-Band Emissions Worst Case - 2Mbps

Channel 39 (2480MHz)


100kHz PSD reference Level

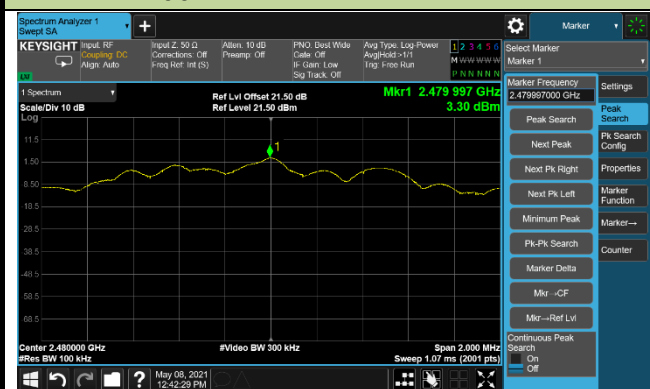

Low Band Edge



Spurious Emission 30MHz ~ 25GHz

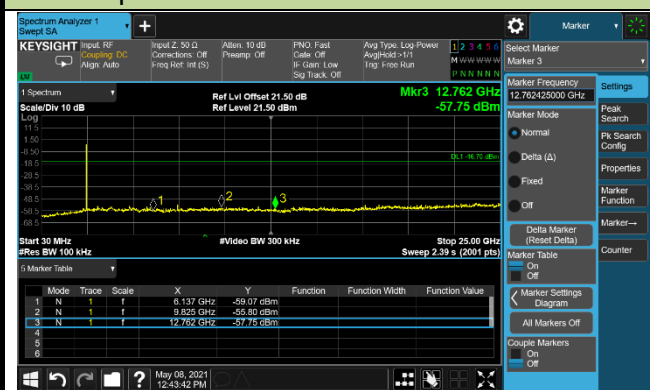

5.5 輻射電場強度

5.5.1 量測方法

待測物置於非導體桌面（落地型產品置於地上），受測物使用交流電源時，將其與任何配件設備之電源線連接至位於旋轉桌的交流電源。受測物使用電池時，測試時應裝置新電池或充電完全的電池。受測物與配件設備之電源線無須束綁，桌面上受測設備的所有電源線由桌子的後緣垂下沿旋轉桌表面接至交流插座。落地型設備的交流電源線可以方便的型態走線。桌面可 360 度旋轉，接收天線置於距待測物 3m 距離，高度可在 1 至 4 公尺間變動，以量測待測物之最大輻射電場強度，接收天線並應於水平及垂直極化方向各量測一次。（待測物擺設方式根據 ANSI C63.10-2013 版本，待測物放置桌中心，1G 以下擺設高度為 80cm/1G 以上擺設高度為 150cm）

- (1) 任一頻率小於或等於 1000 MHz 之訊號,使用 CISPR 準峰值檢波器
- (2) 任一頻率大於 1000 MHz 之訊號，使用平均值檢波器測量，當規定之發射限制值為平均值時(含 1000 MHz 以下)，受測訊號藉由峰值檢波器(RBW:1MHz,VBW:3MHz)所測量之峰值，亦須符合峰值發射限制值，其峰值發射限制值為最大容許平均值加 20 dB。

備註: 若為手持式或穿戴式之裝置，需對其三個正交軸的方位評估測試，並記錄最差的數值。

5.5.2 限制要求


其電場強度不得超過下表之限值，且其不必要之發射皆不得大於主波發射強度。各頻段重疊處，以較嚴格之限制值為準。

頻率(f) (MHz)	電場強度 (微伏特/公尺， $\mu\text{V/m}$)	測距 (公尺)
$0.009 \leq f \leq 0.490$	$2400/f(\text{kHz})$	300
$0.490 < f \leq 1.705$	$24000/f(\text{kHz})$	30
$1.705 < f < 30$	30	30
$30 \leq f \leq 88$	100	3
$88 < f \leq 216$	150	3
$216 < f \leq 960$	200	3
$960 < f$	500	3


上表規定之電場強度，發射頻率在 9 kHz~90 kHz、110 kHz~490 kHz 及 1000MHz 以上者，其量測應以平均值檢波器為基準，且須符合低功率射頻器材技術規範第 6.14.節之規定；其他發射頻率，應以 CISPR 準峰值(quasi-peak) 檢波器測量；非以上表所指定之距離測量時，應符合第 6.5 節之規定，而輻射發射之量測頻率範圍須符合低功率射頻器材技術規範第 6.12 節之規定。

5.5.3 測試架構圖


Under 30MHz Test

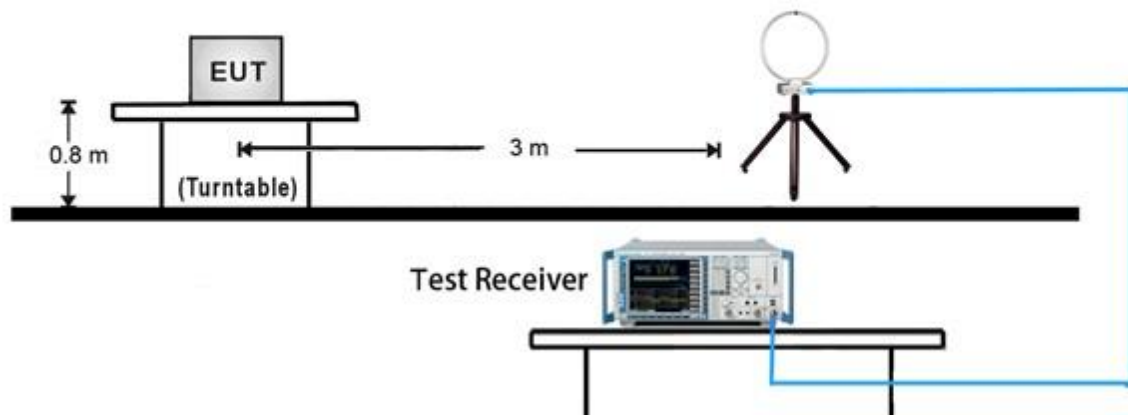


Under 1GHz Test Setup

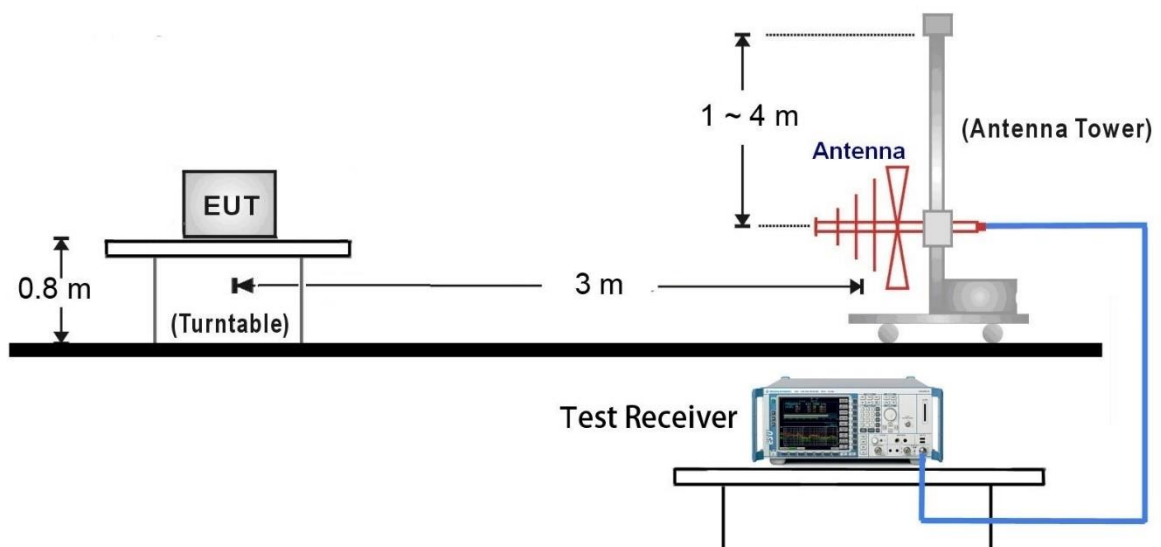

1GHz ~ 18GHz Test Setup:

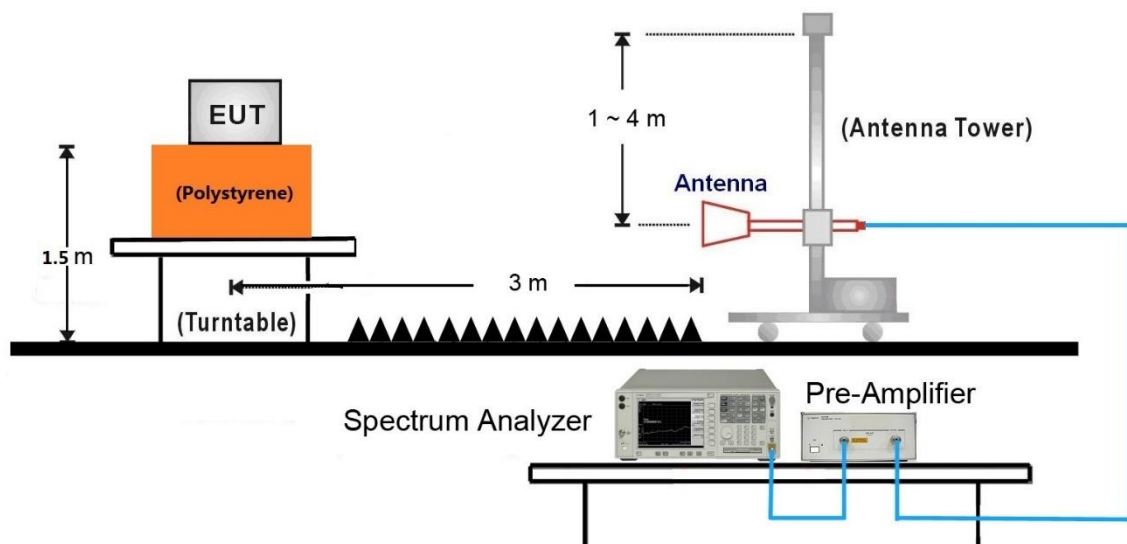


18GHz ~25GHz Test Setup:

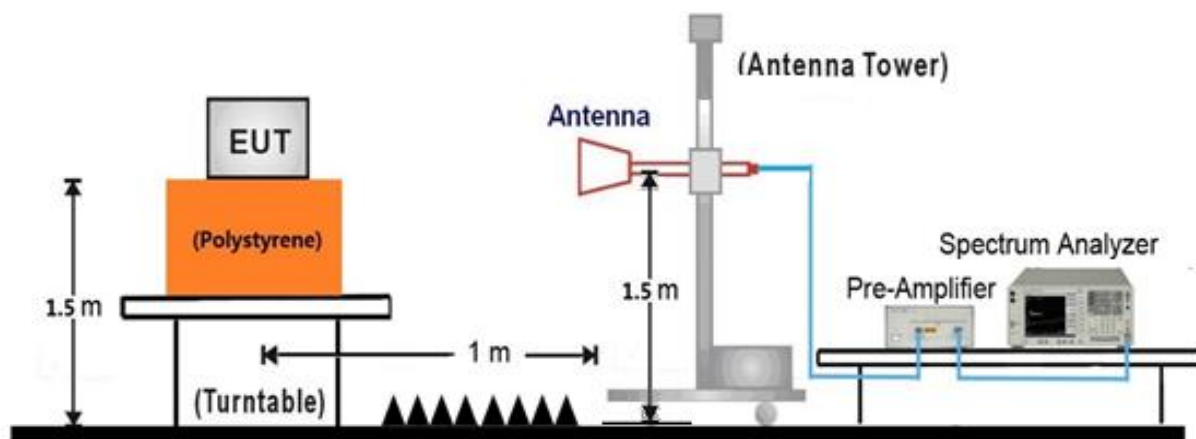

5.5.4 輻射電場強度測試結果

Filter Configuration 4#

EUT	ACCESS POINT	Date of Test	2021-03-10
Factor	BBHA 9120D	Temp. / Humidity	20.8°C/35%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by BLE at Channel 2402MHz - 1Mbps	Test Voltage	110V/60Hz

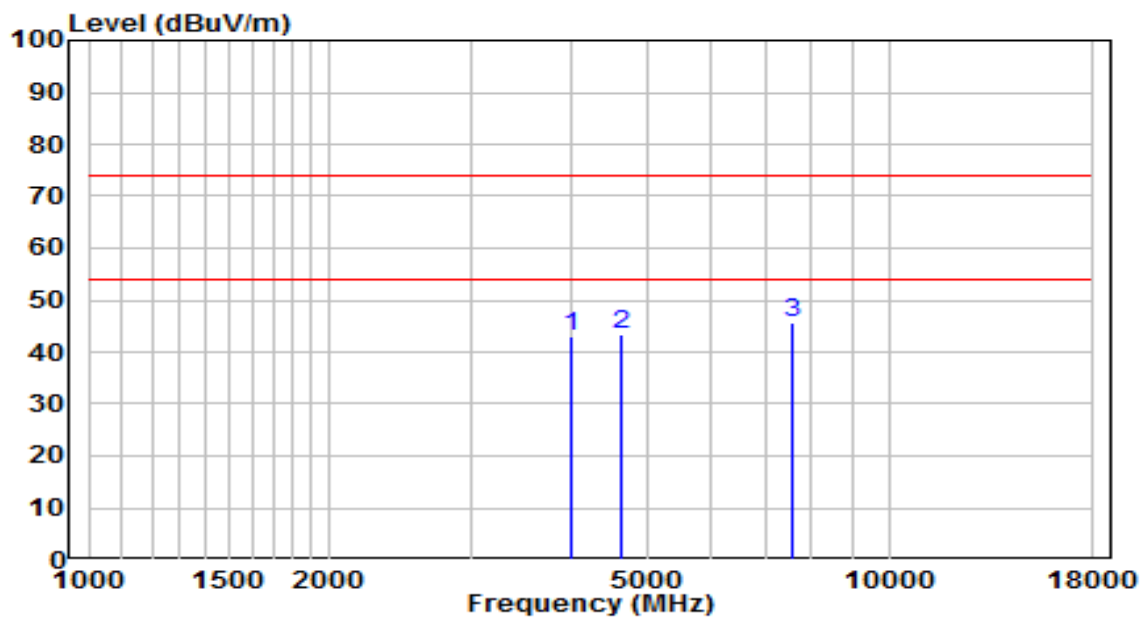


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	4009.000	42.27	0.91	43.18	-30.82	74.00	Peak
2	4638.000	40.40	2.88	43.28	-30.72	74.00	Peak
3	* 7562.000	33.87	11.82	45.69	-28.31	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-10
Factor	BBHA 9120D	Temp. / Humidity	20.8°C/35%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by BLE at Channel 2402MHz - 1Mbps	Test Voltage	110V/60Hz

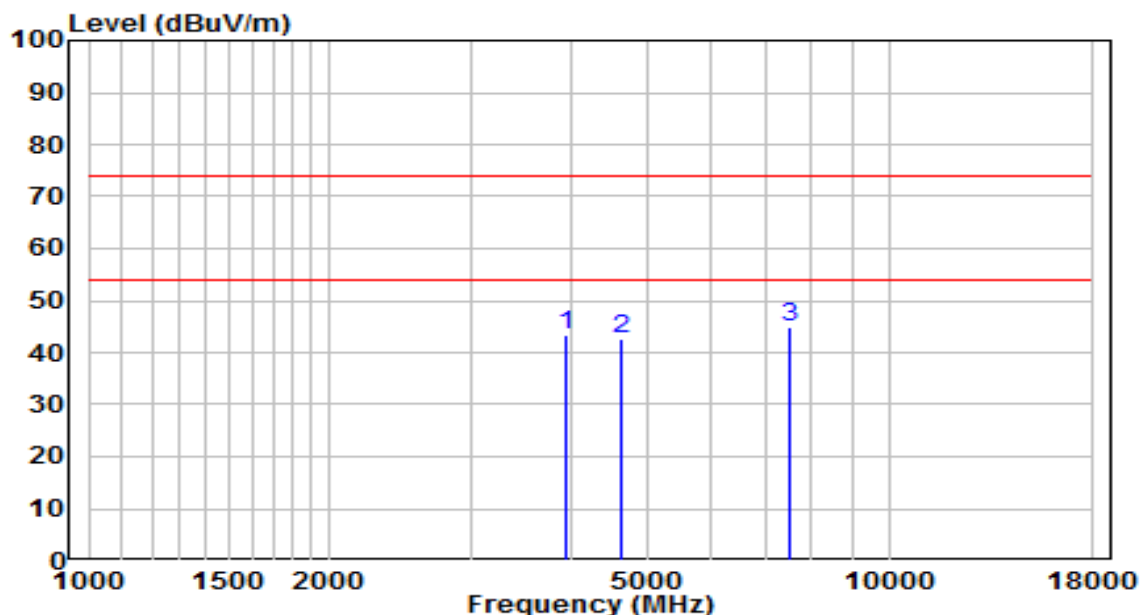


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	3958.000	42.71	0.74	43.44	-30.56	74.00	Peak
2	4638.000	39.86	2.88	42.74	-31.26	74.00	Peak
3	* 7528.000	33.22	11.76	44.98	-29.02	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-10
Factor	BBHA 9120D	Temp. / Humidity	20.8°C/35%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by BLE at Channel 2442MHz - 1Mbps	Test Voltage	110V/60Hz

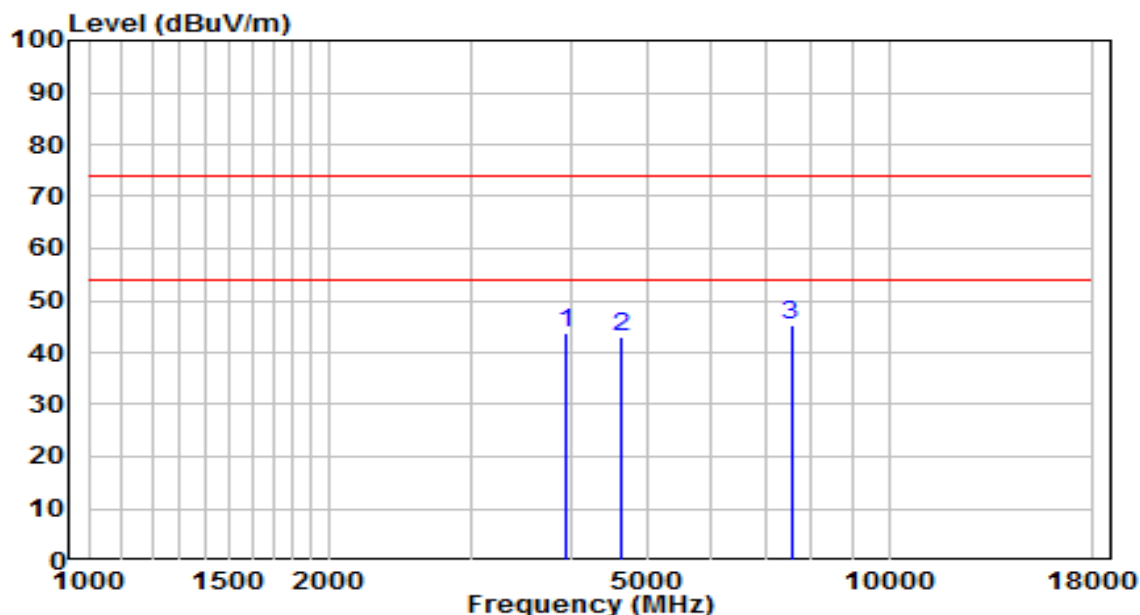


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	3958.000	43.09	0.74	43.83	-30.17	74.00	Peak
2	4621.000	40.18	2.84	43.02	-30.98	74.00	Peak
3	* 7545.000	33.58	11.79	45.37	-28.63	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-10
Factor	BBHA 9120D	Temp. / Humidity	20.8°C/35%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by BLE at Channel 2442MHz - 1Mbps	Test Voltage	110V/60Hz

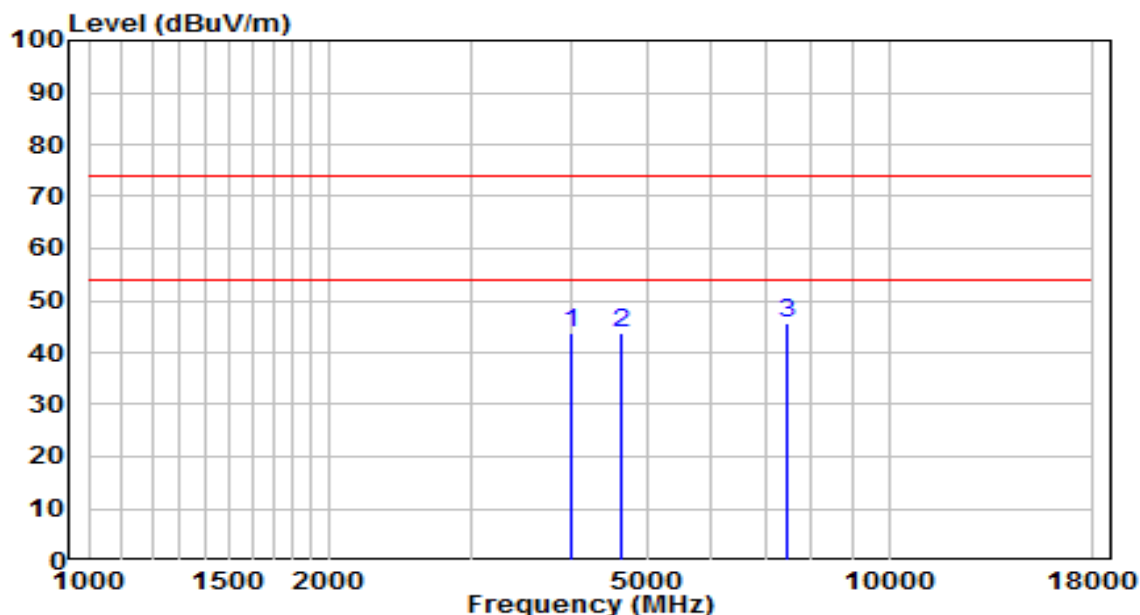


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	4009.000	42.75	0.91	43.66	-30.34	74.00	Peak
2	4621.000	40.94	2.84	43.78	-30.22	74.00	Peak
3	* 7477.000	33.83	11.65	45.48	-28.52	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-10
Factor	BBHA 9120D	Temp. / Humidity	20.8°C/35%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by BLE at Channel 2480MHz – 1Mbps	Test Voltage	110V/60Hz

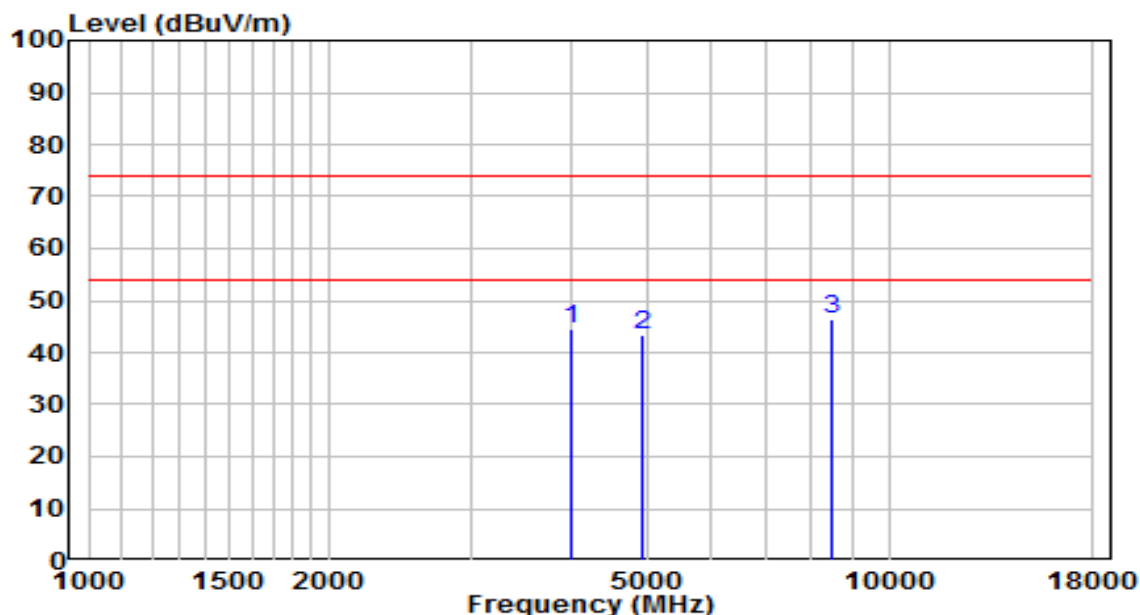


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	4009.000	43.51	0.91	44.42	-29.58	74.00	Peak
2	4910.000	39.75	3.53	43.28	-30.72	74.00	Peak
3	* 8480.000	34.12	12.46	46.58	-27.42	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-10
Factor	BBHA 9120D	Temp. / Humidity	20.8°C/35%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by BLE at Channel 2480MHz – 1Mbps	Test Voltage	110V/60Hz

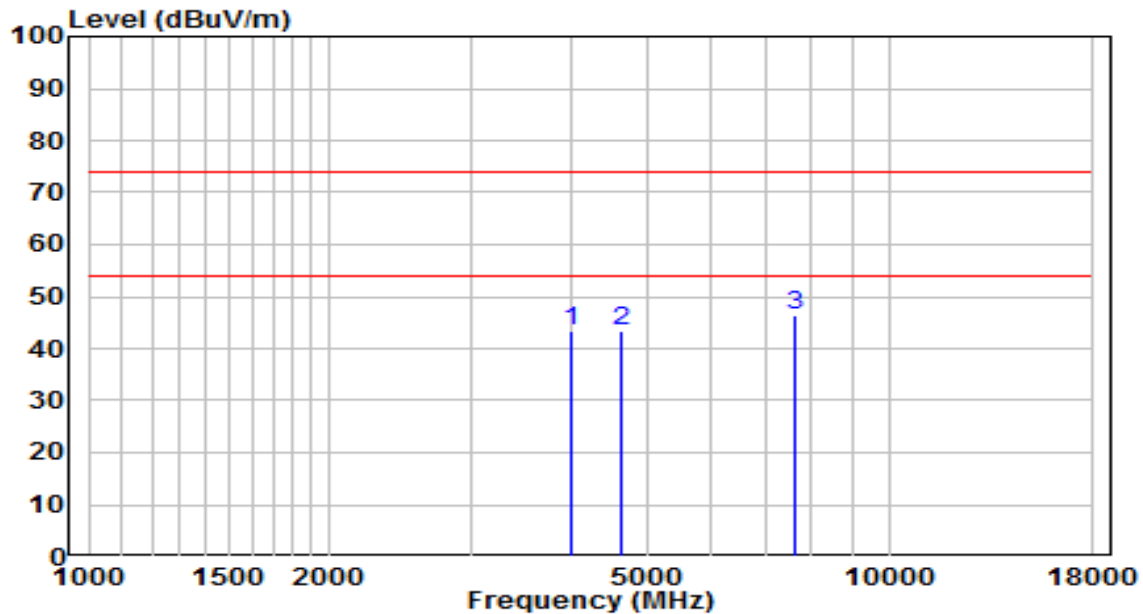


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	4009.000	42.53	0.91	43.44	-30.56	74.00	Peak
2	4638.000	40.58	2.88	43.46	-30.54	74.00	Peak
3	* 7613.000	34.45	11.90	46.35	-27.65	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-10
Factor	BBHA 9120D	Temp. / Humidity	20.8°C/35%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by BLE at Channel 2402MHz – 2Mbps	Test Voltage	110V/60Hz

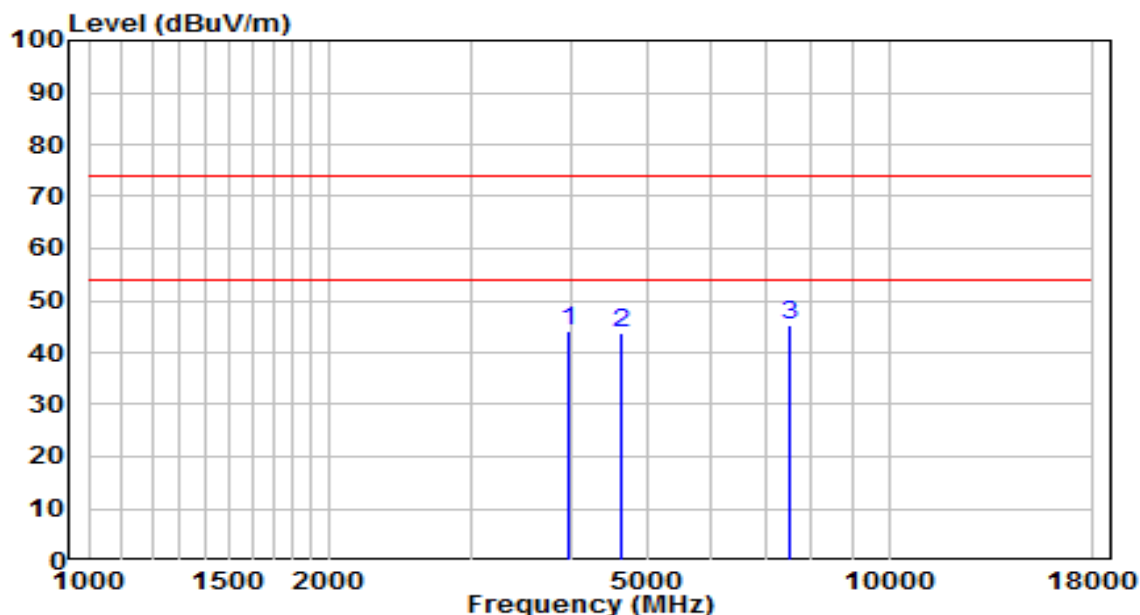


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	3975.000	43.49	0.79	44.29	-29.71	74.00	Peak
2	4638.000	40.84	2.88	43.72	-30.28	74.00	Peak
3	* 7511.000	33.68	11.73	45.41	-28.59	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-10
Factor	BBHA 9120D	Temp. / Humidity	20.8°C/35%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by BLE at Channel 2402MHz – 2Mbps	Test Voltage	110V/60Hz

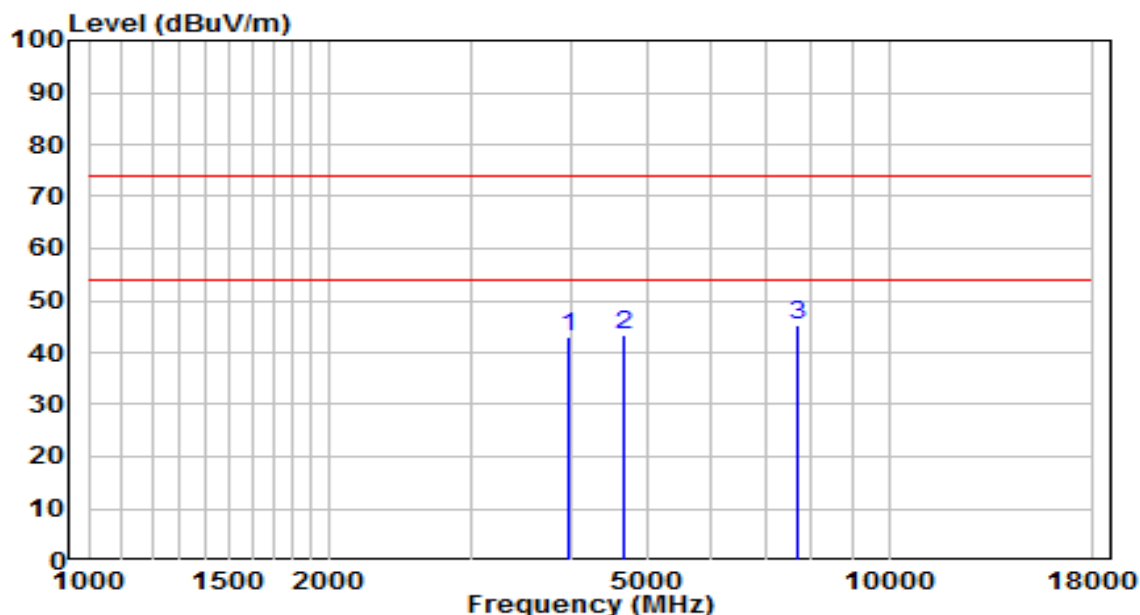


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	3992.000	42.18	0.85	43.03	-30.97	74.00	Peak
2	4655.000	40.48	2.92	43.40	-30.60	74.00	Peak
3	* 7664.000	33.43	11.98	45.41	-28.59	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-10
Factor	BBHA 9120D	Temp. / Humidity	20.8°C/35%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by BLE at Channel 2442MHz – 2Mbps	Test Voltage	110V/60Hz

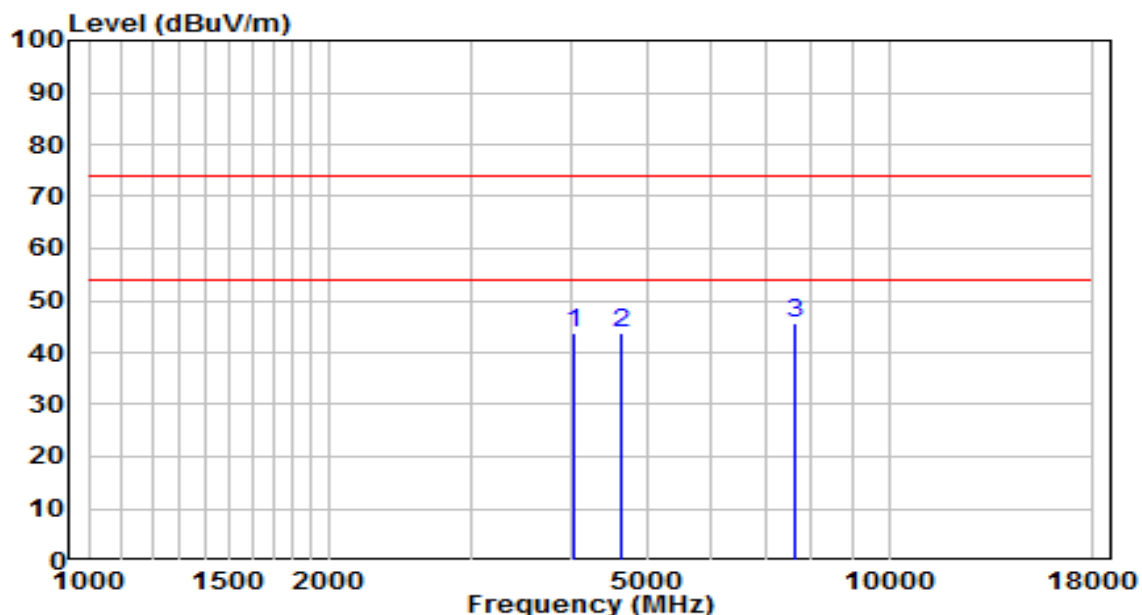


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	4026.000	42.87	0.97	43.84	-30.16	74.00	Peak
2	4638.000	40.89	2.88	43.78	-30.22	74.00	Peak
3	* 7630.000	33.60	11.93	45.53	-28.47	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-10
Factor	BBHA 9120D	Temp. / Humidity	20.8°C/35%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by BLE at Channel 2442MHz – 2Mbps	Test Voltage	110V/60Hz

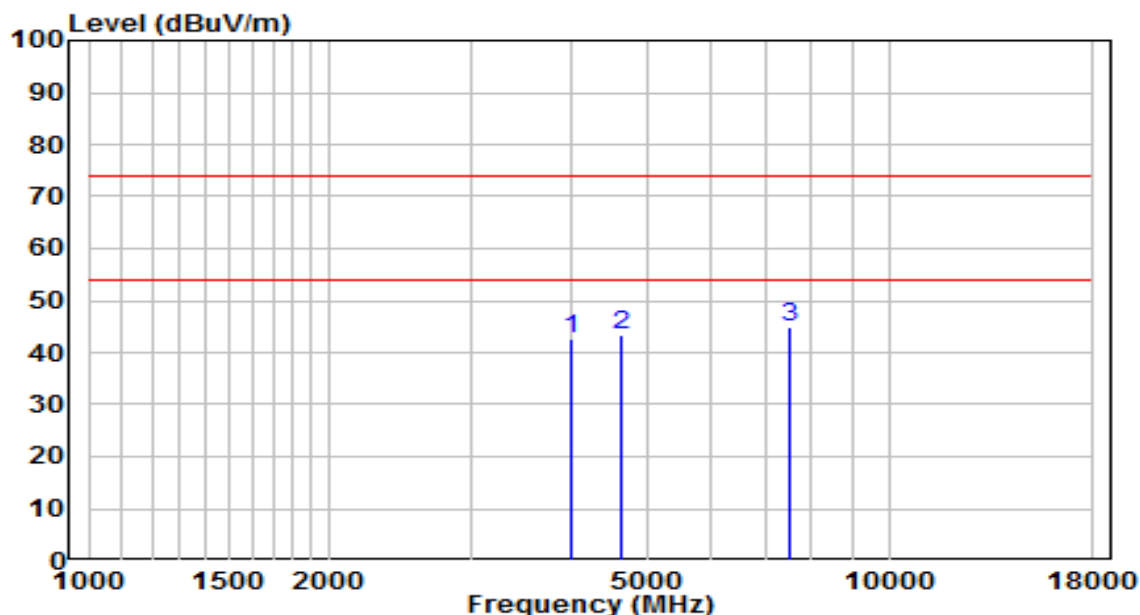


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	4009.000	41.84	0.91	42.75	-31.25	74.00	Peak
2	4638.000	40.41	2.88	43.29	-30.71	74.00	Peak
3	* 7511.000	33.35	11.73	45.08	-28.92	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-10
Factor	BBHA 9120D	Temp. / Humidity	20.8°C/35%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by BLE at Channel 2480MHz – 2Mbps	Test Voltage	110V/60Hz

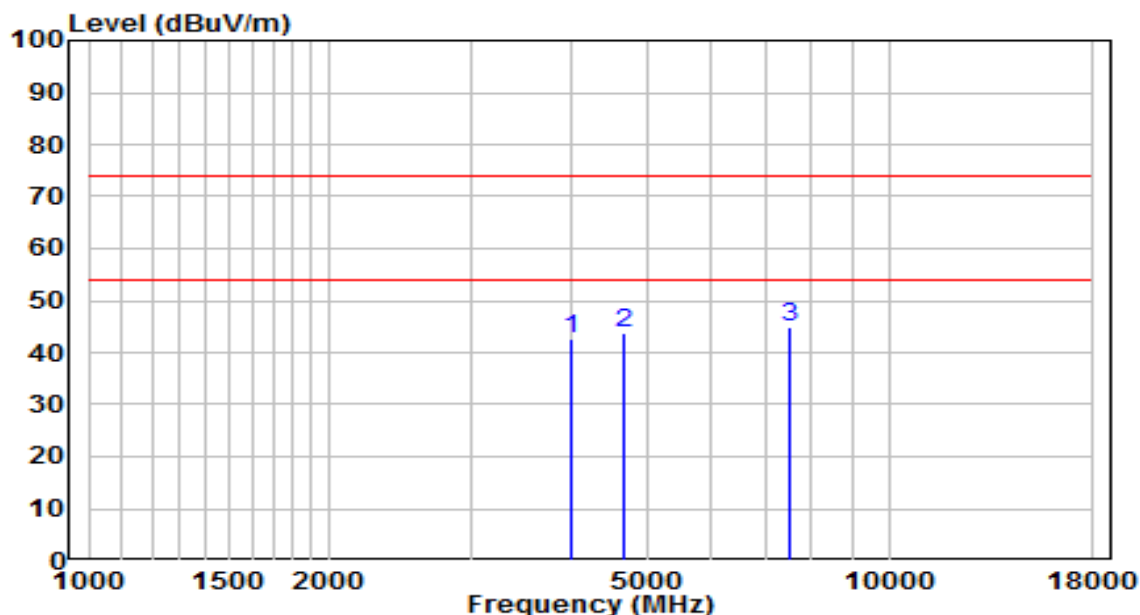


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	4009.000	41.68	0.91	42.59	-31.41	74.00	Peak
2	4655.000	40.90	2.92	43.83	-30.17	74.00	Peak
3	* 7528.000	33.26	11.76	45.02	-28.98	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-10
Factor	BBHA 9120D	Temp. / Humidity	20.8°C/35%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by BLE at Channel 2480MHz – 2Mbps	Test Voltage	110V/60Hz

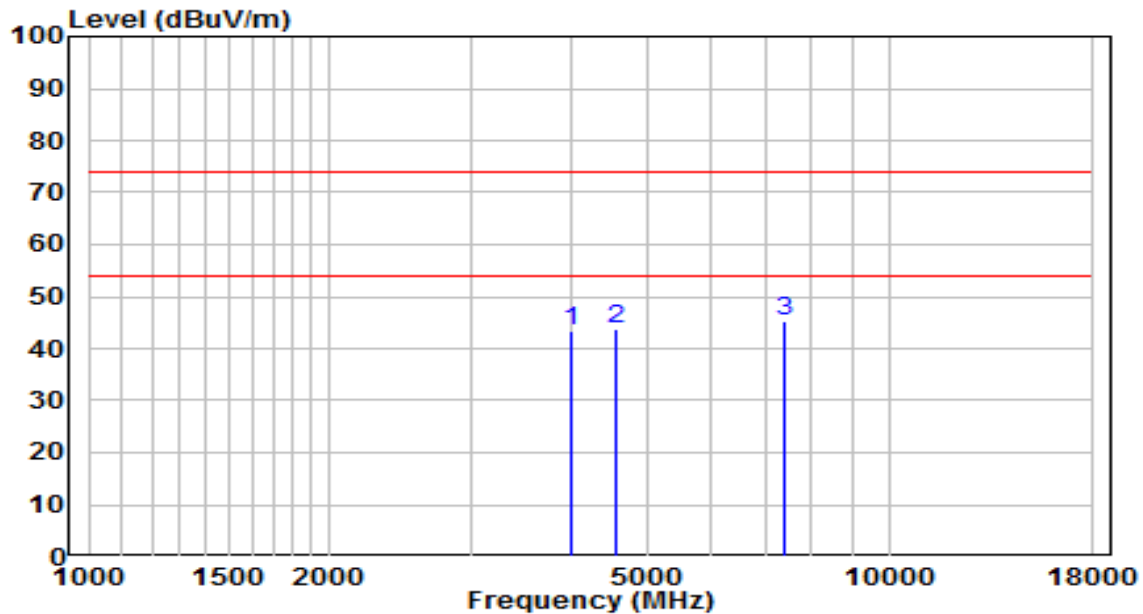


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	4009.000	42.50	0.91	43.41	-30.59	74.00	Peak
2	4570.000	41.02	2.72	43.74	-30.26	74.00	Peak
3	* 7392.000	33.86	11.41	45.27	-28.73	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Filter Configuration 5#

EUT	ACCESS POINT	Date of Test	2021-05-08
Factor	BBHA 9120D	Temp. / Humidity	24.2°C/38%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by BLE at Channel 2402MHz – 2Mbps	Test Voltage	110V/60Hz

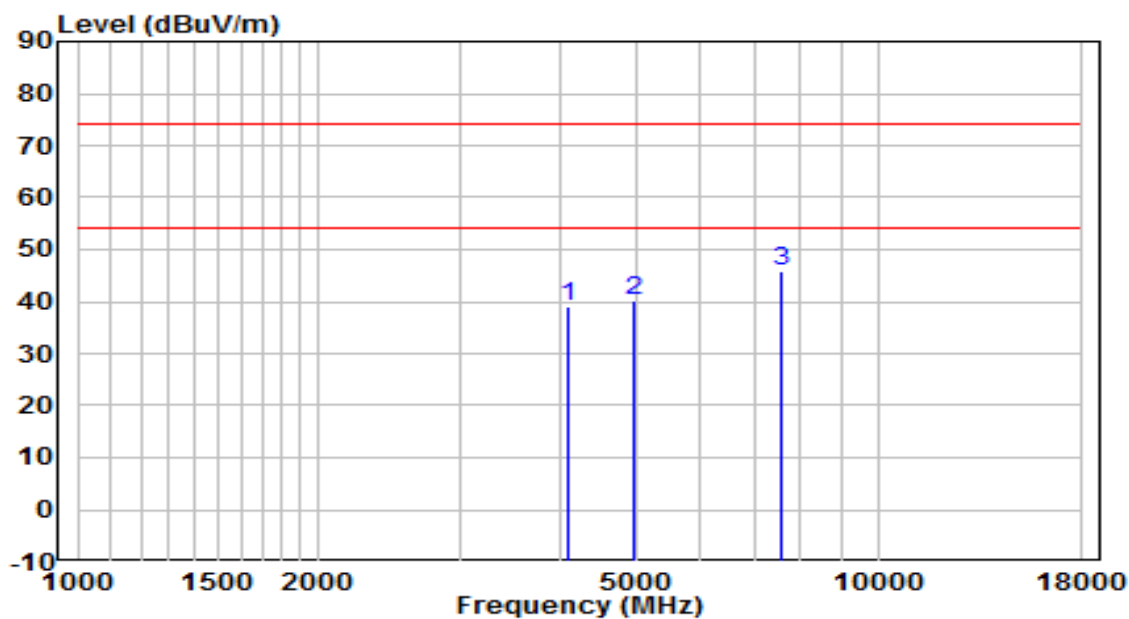


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	4094.000	38.01	1.19	39.20	-34.80	74.00	Peak
2	4944.000	36.44	3.62	40.05	-33.95	74.00	Peak
3	* 7570.500	33.88	11.83	45.71	-28.29	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.
5. For filter 5#, the worst case was performed in the report.

EUT	ACCESS POINT	Date of Test	2021-05-08
Factor	BBHA 9120D	Temp. / Humidity	24.2°C/38%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by BLE at Channel 2402MHz – 2Mbps	Test Voltage	110V/60Hz

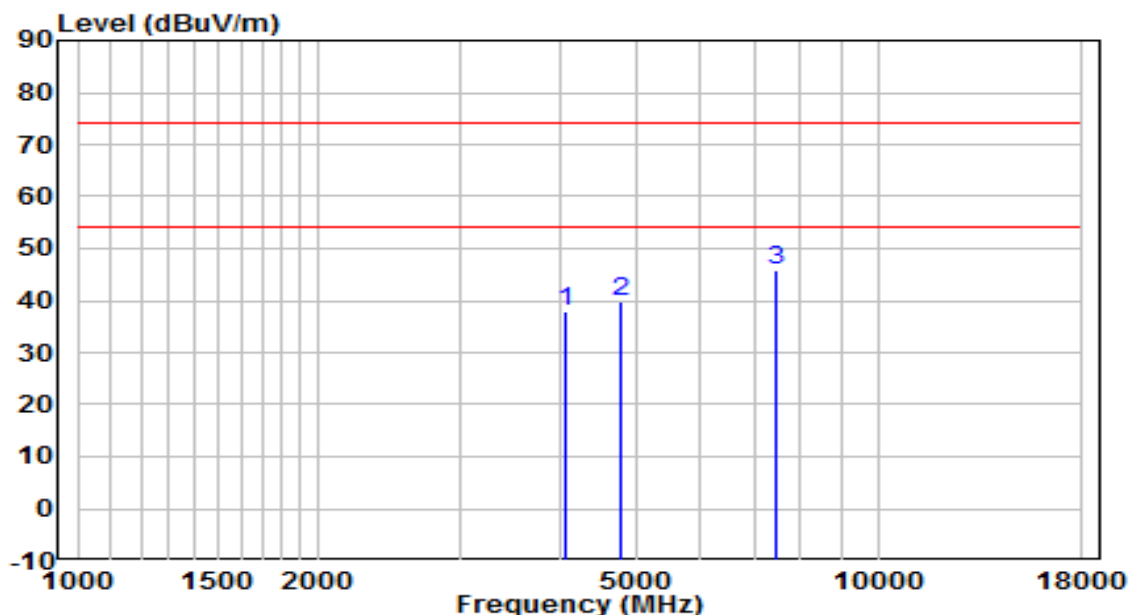


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	4068.500	36.93	1.11	38.04	-35.96	74.00	Peak
2	4757.000	36.61	3.17	39.77	-34.23	74.00	Peak
3	* 7443.000	34.22	11.55	45.77	-28.23	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. For filter 5#, the worst case was performed in the report.

Filter Configuration 6#

EUT	ACCESS POINT	Date of Test	2021-05-08
Factor	BBHA 9120D	Temp. / Humidity	24.2°C/38%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by BLE at Channel 2480MHz – 2Mbps	Test Voltage	110V/60Hz

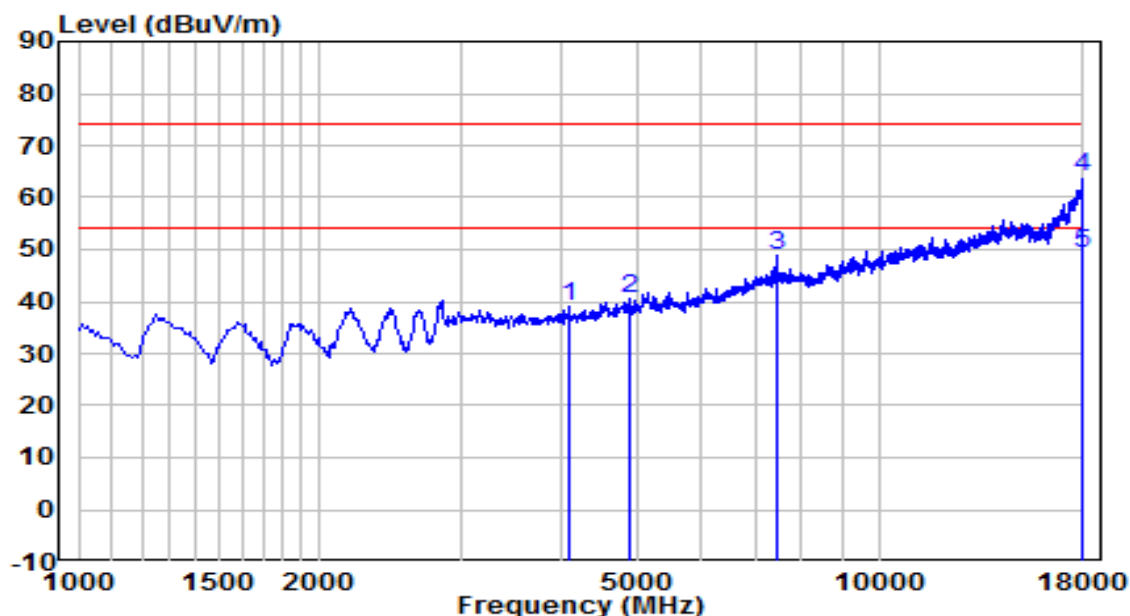


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	4094.000	37.76	1.19	38.95	-35.05	74.00	Peak
2	4867.500	37.10	3.43	40.53	-33.47	74.00	Peak
3	7434.500	37.21	11.53	48.74	-25.26	74.00	Peak
4	18000.000	31.96	32.07	64.03	-9.97	74.00	Peak
5	* 18000.000	17.05	32.07	49.12	-4.88	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. For filter 6#, the worst case was performed in the report.
6. We only show the worst case test trace for this mode.

EUT	ACCESS POINT	Date of Test	2021-05-08
Factor	BBHA 9120D	Temp. / Humidity	24.2°C/38%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by BLE at Channel 2480MHz – 2Mbps	Test Voltage	110V/60Hz

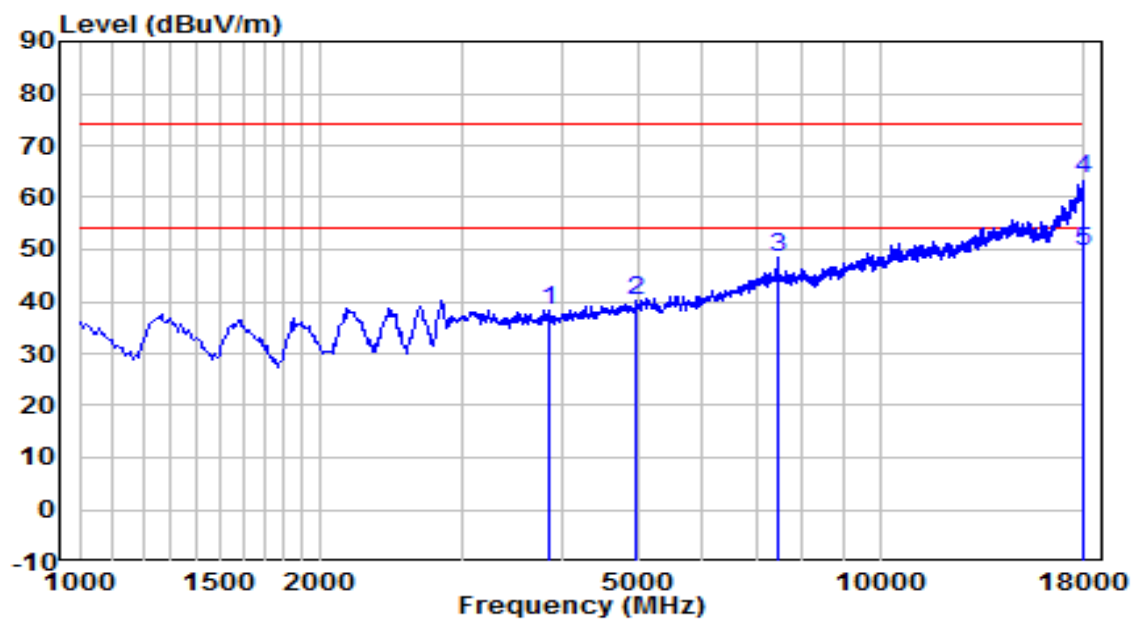


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	3856.000	38.03	0.38	38.42	-35.58	74.00	Peak
2	4952.500	36.42	3.64	40.05	-33.95	74.00	Peak
3	7434.500	37.10	11.53	48.63	-25.37	74.00	Peak
4	17991.500	31.63	32.05	63.68	-10.32	74.00	Peak
5	* 17991.500	17.55	32.05	49.60	-4.40	54.00	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
- Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.
- For filter 6#, the worst case was performed in the report.
- We only show the worst case test trace for this mode.

EUT	ACCESS POINT	Date of Test	2021-09-14
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	24.1°C/44.7%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Receive by BLE at channel 2442MHz – 1Mbps	Test Voltage	110V/60Hz

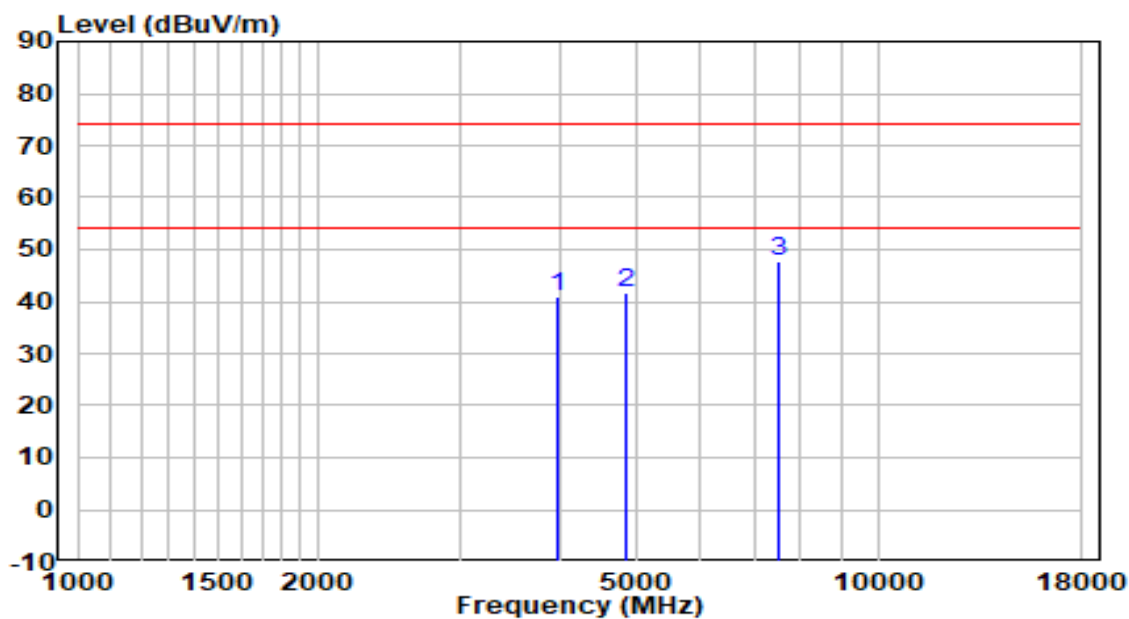


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	3992.000	39.74	1.16	40.89	-33.11	74.00	Peak
2	4859.000	37.93	3.70	41.63	-32.37	74.00	Peak
3	* 7519.500	34.87	13.03	47.90	-26.10	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-09-14
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	24.1°C/44.7%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Receive by BLE at channel 2442MHz – 1Mbps	Test Voltage	110V/60Hz

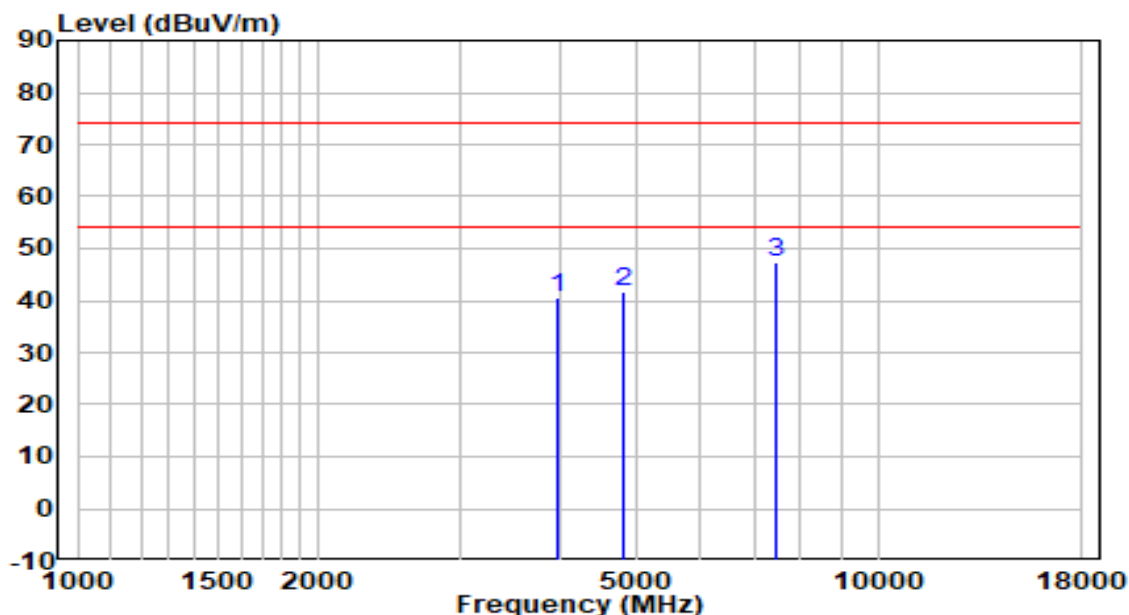


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	3975.000	39.29	1.10	40.40	-33.60	74.00	Peak
2	4825.000	38.00	3.64	41.64	-32.36	74.00	Peak
3	* 7460.000	34.67	12.84	47.50	-26.50	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

The Result of Radiated Spurious Emission below 1GHz:

EUT	ACCESS POINT	Date of Test	2021-04-28
Factor	VULB 9162	Temp. / Humidity	23.0°C/50.5%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by BLE at channel 2442MHz – 1Mbps	Test Voltage	110V/60Hz

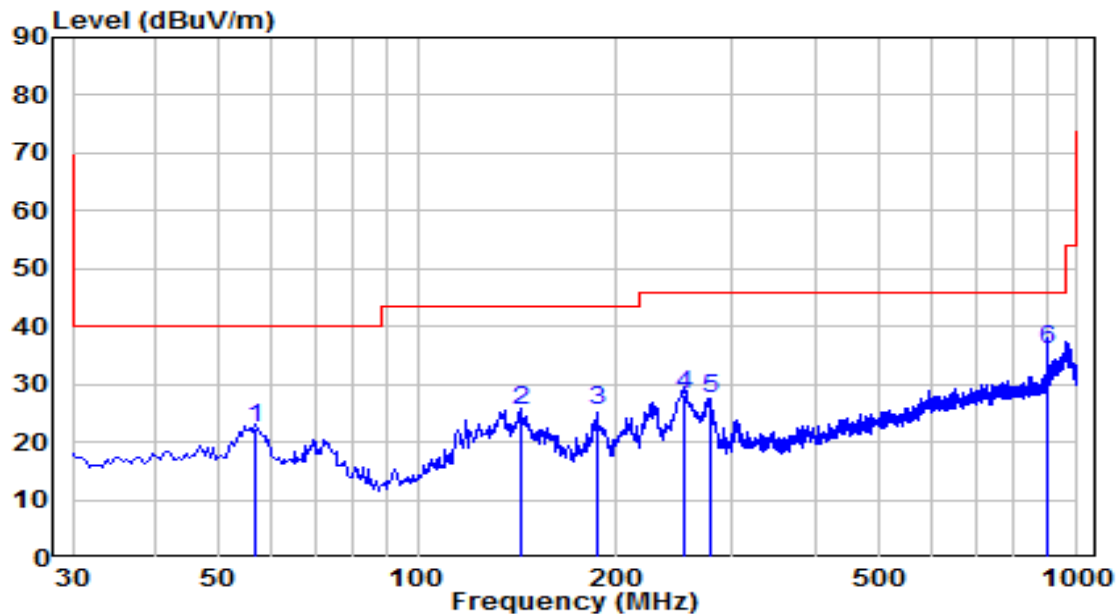


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	56.675	1.57	20.82	22.39	-17.61	40.00	QP
2	143.490	9.54	16.01	25.55	-17.95	43.50	QP
3	186.655	6.91	18.40	25.31	-18.19	43.50	QP
4	252.615	7.68	20.55	28.23	-17.77	46.00	QP
5	276.865	6.74	20.93	27.67	-18.33	46.00	QP
6	* 900.090	4.16	31.77	35.93	-10.07	46.00	QP

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB) + Cable Loss (dB).
- Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.
- The amplitude of Radiated emissions (the test frequency range: 9kHz ~ 30MHz, 18GHz ~ 25GHz), is that proximity to ambient noise, which also are attenuated more than 20 dB below the permissible value. Therefore, the data is not presented in the report.

EUT	ACCESS POINT	Date of Test	2021-04-28
Factor	VULB 9162	Temp. / Humidity	23.0°C/50.5%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by BLE at channel 2442MHz – 1Mbps	Test Voltage	110V/60Hz

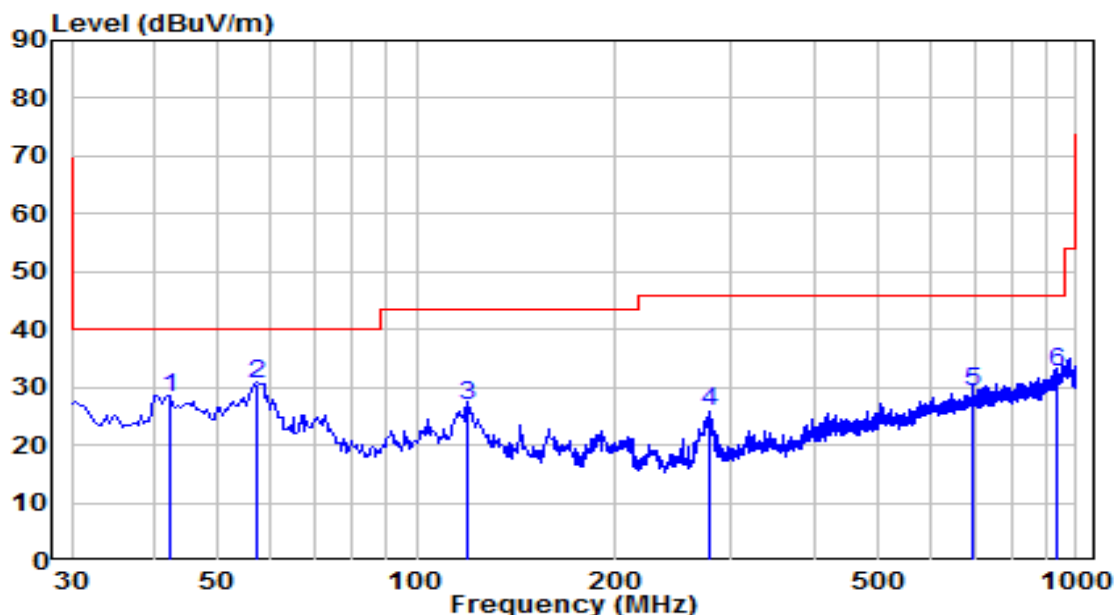


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	42.125	6.72	21.38	28.10	-11.90	40.00	QP
2	57.160	9.74	20.73	30.47	-9.53	40.00	QP
3	119.240	9.37	17.35	26.72	-16.78	43.50	QP
4	276.865	4.76	20.93	25.69	-20.31	46.00	QP
5	697.360	-0.11	29.28	29.17	-16.83	46.00	QP
6	932.100	0.57	32.02	32.59	-13.41	46.00	QP

Note:

- "**", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB) + Cable Loss (dB).
- Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.
- The amplitude of Radiated emissions (the test frequency range: 9kHz ~ 30MHz, 18GHz ~ 25GHz), is that proximity to ambient noise, which also are attenuated more than 20 dB below the permissible value. Therefore, the data is not presented in the report.

EUT	ACCESS POINT	Date of Test	2021-09-14
Factor	VULB 9162 (30MHz~8GHz)	Temp. / Humidity	24.1°C/44.7%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Receive by BLE at channel 2442MHz – 1Mbps	Test Voltage	110V/60Hz

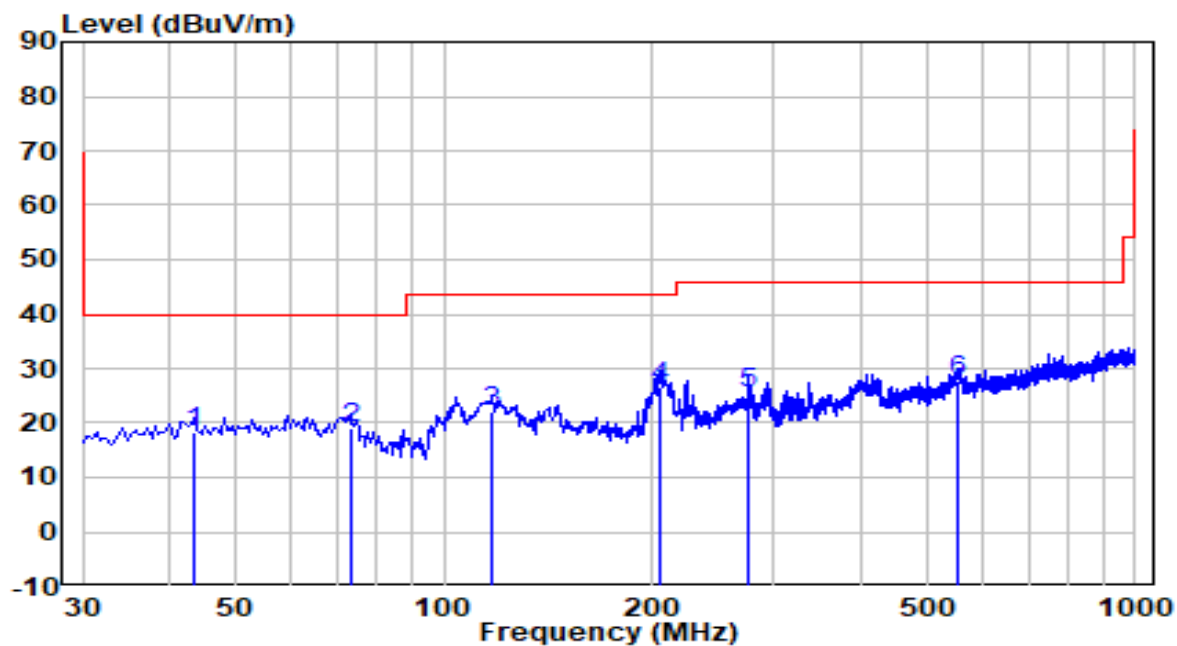


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	43.580	-3.33	21.59	18.26	-21.74	40.00	QP
2	73.165	2.82	16.14	18.96	-21.04	40.00	QP
3	117.300	4.34	17.64	21.98	-21.52	43.50	QP
4	* 205.570	7.46	18.99	26.45	-17.05	43.50	QP
5	275.895	4.57	20.90	25.47	-20.53	46.00	QP
6	551.375	0.80	26.84	27.64	-18.36	46.00	QP

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
- Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-09-14
Factor	VULB 9162 (30MHz~8GHz)	Temp. / Humidity	24.1°C/44.7%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Receive by BLE at channel 2442MHz – 1Mbps	Test Voltage	110V/60Hz

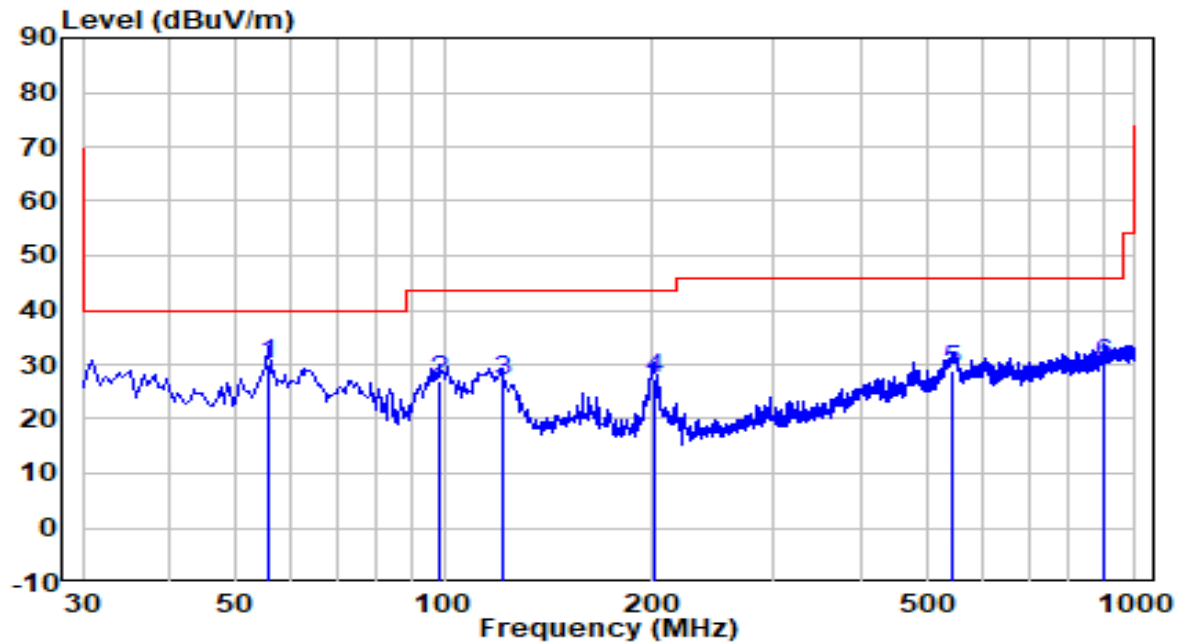

No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	55.705	8.85	21.00	29.85	-10.15	40.00	QP
2		98.870	8.22	18.92	27.14	-16.36	43.50	QP
3		121.665	9.98	17.08	27.06	-16.44	43.50	QP
4		200.720	8.21	19.22	27.43	-16.07	43.50	QP
5		546.040	1.98	26.76	28.74	-17.26	46.00	QP
6		904.455	-1.64	31.80	30.16	-15.84	46.00	QP

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

5.6 頻帶邊緣

5.6.1 量測方法

待測物置於非導體桌面（落地型產品置於地上），受測物使用交流電源時，將其與任何配件設備之電源線連接至位於旋轉桌的交流電源。受測物使用電池時，測試時應裝置新電池或充電完全的電池。受測物與配件設備之電源線無須束綁，桌面上受測設備的所有電源線由桌子的後緣垂下沿旋轉桌表面接至交流插座。落地型設備的交流電源線可以方便的型態走線。桌面可360度旋轉，接收天線置於距待測物3m距離，高度可在1至4公尺間變動，以量測待測物之最大輻射電場強度，接收天線並應於水平及垂直極化方向各量測一次。（待測物擺設方式根據 ANSI C63.10-2013版，待測物放置桌中心，1G以下擺設高度為80cm/1G以上擺設高度為150cm）

- (1) 任一頻率小於或等於1000 MHz 之訊號,使用CISPR準峰值檢波器
- (2) 任一頻率大於1000 MHz 之訊號，使用平均值檢波器測量，當規定之發射限制值為平均值時(含1000 MHz 以下)，受測訊號藉由峰值檢波器(RBW:1MHz,VBW:3MHz)所測量之峰值，亦須符合峰值發射限制值，其峰值發射限制值為最大容許平均值加20 dB。

備註：若為手持式或穿戴式之裝置，需對其三個正交軸的方位評估測試，並記錄最差的數值。


5.6.2 限制要求

除低功率射頻器材技術規範另有規定外，任何低功率射頻器材之主波皆不得使用下表所列各頻段之頻率低功率射頻器材落於下表所列頻帶內之混附發射，其電場強度必須符合低功率射頻器材技術規範之第3.6節限制規定

頻 率(MHz)	頻 率(MHz)	頻 率(MHz)	頻 率(MHz)	頻 率(MHz)
0.090~0.110	25.500~25.700	703.00~748.00	2310.0~2390.0	13250~13400
0.490~0.510	37.475~38.275	758.00~803.00	2483.5~2900.0	14470~14500
2.172~2.198	73.500~75.400	825.00~915.00	3260.0~3267.0	15350~16200
3.013~3.033	108.00~138.00	930.00~1240.0	3332.0~3339.0	17700~21400
4.115~4.198	149.90~150.05	1300.0~1427.0	3345.8~3358.0	22010~23120
5.670~5.690	156.70~156.90	1435.0~1626.5	3500.0~4400.0	23600~24000
6.200~6.300	162.01~167.17	1660.0~1785.0	4500.0~5250.0	31200~31800
8.230~8.400	167.72~173.20	1805.0~1880.0	5350.0~5460.0	36430~36500
12.265~12.600	240.00~285.00	1885.0~1900.0	7250.0~7750.0	38600 以上
13.340~13.430	322.00~335.40	1905.0~1985.0	8025.0~8500.0	
14.965~15.020	399.90~410.00	2010.0~2025.0	9000.0~9200.0	
16.700~16.755	485.00~510.00	2110.0~2170.0	9300.0~9500.0	
19.965~20.020	608.00~614.00	2200.0~2300.0	10600~12700	

5.6.3 測試架構圖


1GHz ~ 18GHz Test Setup:

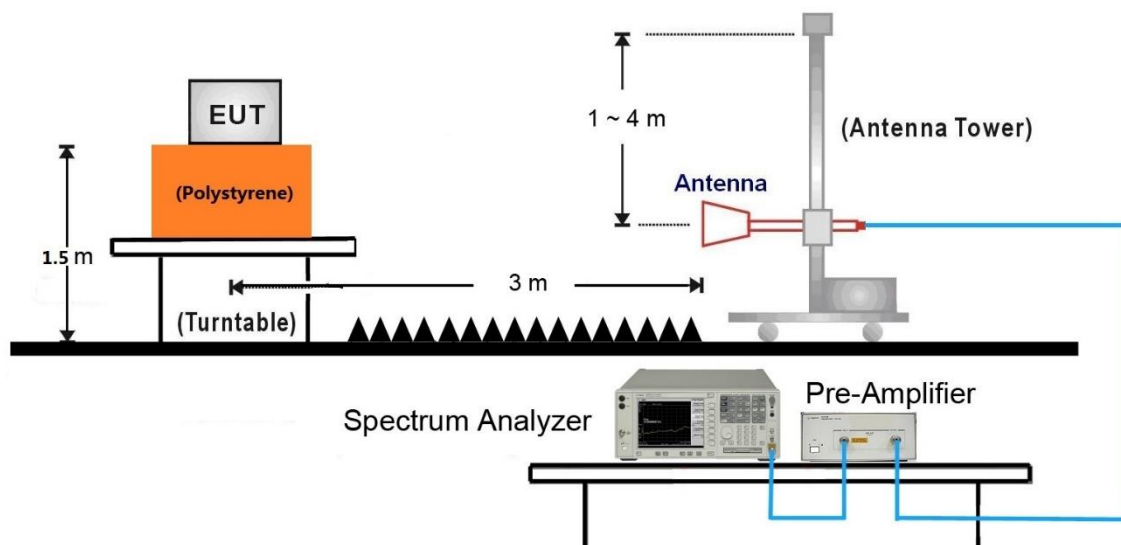

5.6.4 頻帶邊緣測試結果

Filter Configuration 4#

EUT	ACCESS POINT	Date of Test	2021-03-10
Factor	BBHA 9120D	Temp. / Humidity	21.8°C/35%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by BLE at Channel 2402MHz - 1Mbps	Test Voltage	110V/60Hz

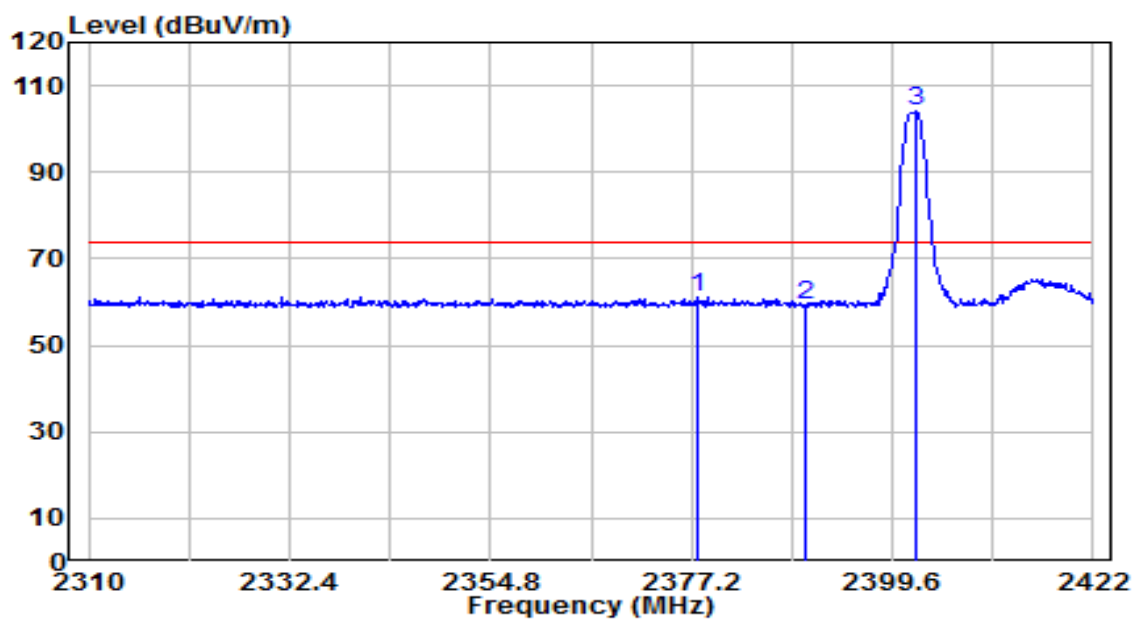


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	2377.760	28.77	32.24	61.01	-12.99	74.00	Peak
2		2390.000	27.06	32.30	59.36	-14.64	74.00	Peak
3		2402.176	71.59	32.35	103.94	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB) + Cable Loss (dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-10
Factor	BBHA 9120D	Temp. / Humidity	21.8°C/35%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by BLE at Channel 2402MHz - 1Mbps	Test Voltage	110V/60Hz

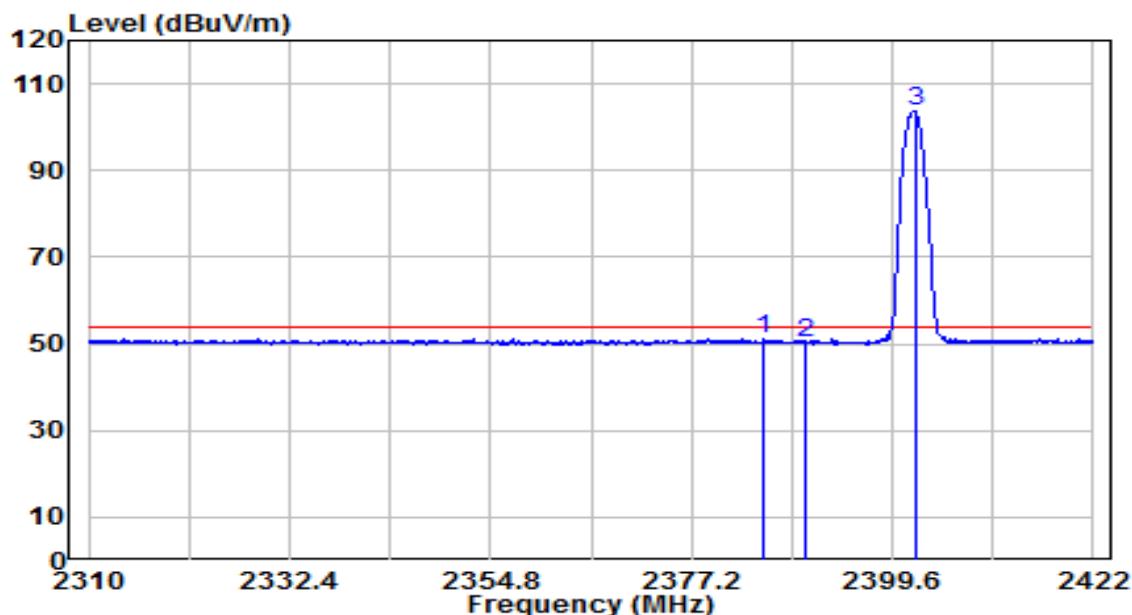


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	2385.264	18.94	32.28	51.22	-2.78	54.00	AV
2		2390.000	18.12	32.30	50.41	-3.59	54.00	AV
3		2402.120	71.57	32.35	103.92	N/A	N/A	AV

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB) + Cable Loss (dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-10
Factor	BBHA 9120D	Temp. / Humidity	21.8°C/35%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by BLE at Channel 2402MHz - 1Mbps	Test Voltage	110V/60Hz

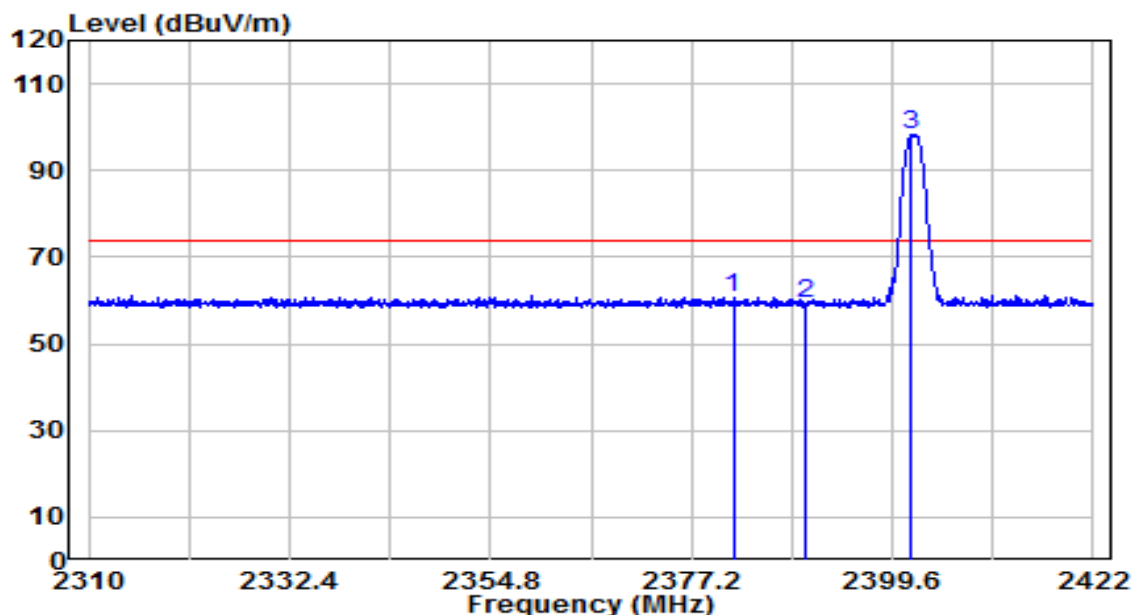


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	2381.848	28.48	32.26	60.74	-13.26	74.00	Peak
2		2390.000	26.95	32.30	59.25	-14.75	74.00	Peak
3		2401.728	65.90	32.35	98.25	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB) + Cable Loss (dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-10
Factor	BBHA 9120D	Temp. / Humidity	21.8°C/35%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by BLE at Channel 2402MHz - 1Mbps	Test Voltage	110V/60Hz

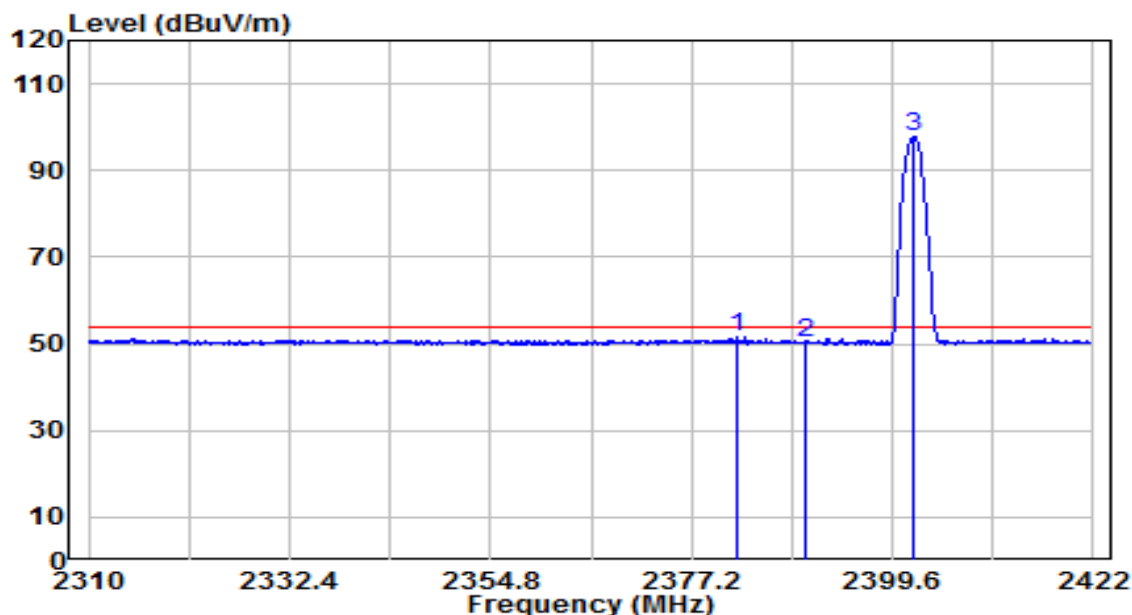


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	2382.408	19.15	32.26	51.42	-2.58	54.00	AV
2		2390.000	17.97	32.30	50.26	-3.74	54.00	AV
3		2402.008	65.64	32.35	97.99	N/A	N/A	AV

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB) + Cable Loss (dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-10
Factor	BBHA 9120D	Temp. / Humidity	21.8°C/35%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by BLE at Channel 2480MHz - 1Mbps	Test Voltage	110V/60Hz

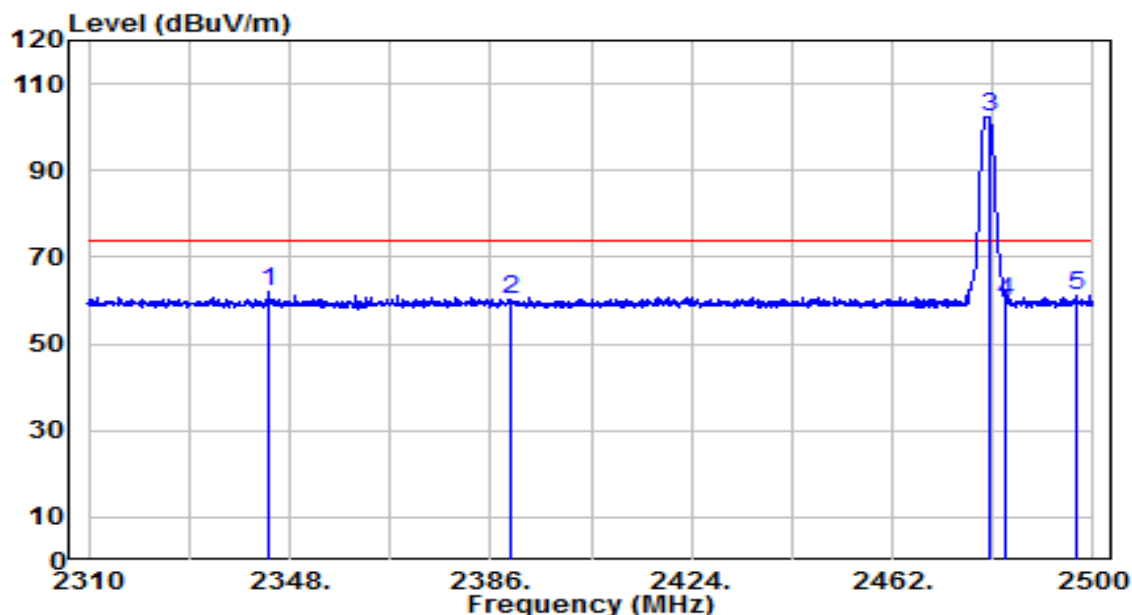


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	2343.900	29.82	32.09	61.91	-12.09	74.00	Peak
2		2390.000	27.90	32.30	60.20	-13.80	74.00	Peak
3		2480.300	69.86	32.69	102.55	N/A	N/A	Peak
4		2483.500	27.17	32.71	59.88	-14.12	74.00	Peak
5		2496.900	28.24	32.77	61.01	-12.99	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB) + Cable Loss (dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-10
Factor	BBHA 9120D	Temp. / Humidity	21.8°C/35%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by BLE at Channel 2480MHz - 1Mbps	Test Voltage	110V/60Hz

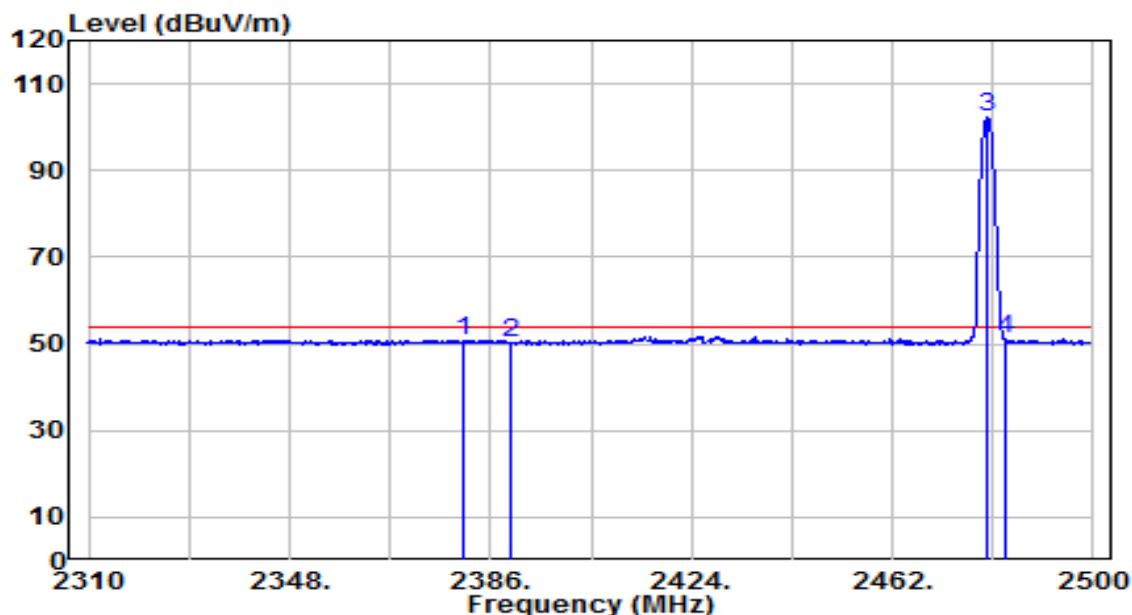


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	2380.800	18.62	32.26	50.88	-3.12	54.00	AV
2	2390.000	17.77	32.30	50.06	-3.94	54.00	AV
3	2480.100	69.67	32.69	102.37	N/A	N/A	AV
4	* 2483.500	18.39	32.71	51.10	-2.90	54.00	AV

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB) + Cable Loss (dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-10
Factor	BBHA 9120D	Temp. / Humidity	21.8°C/35%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by BLE at Channel 2480MHz - 1Mbps	Test Voltage	110V/60Hz

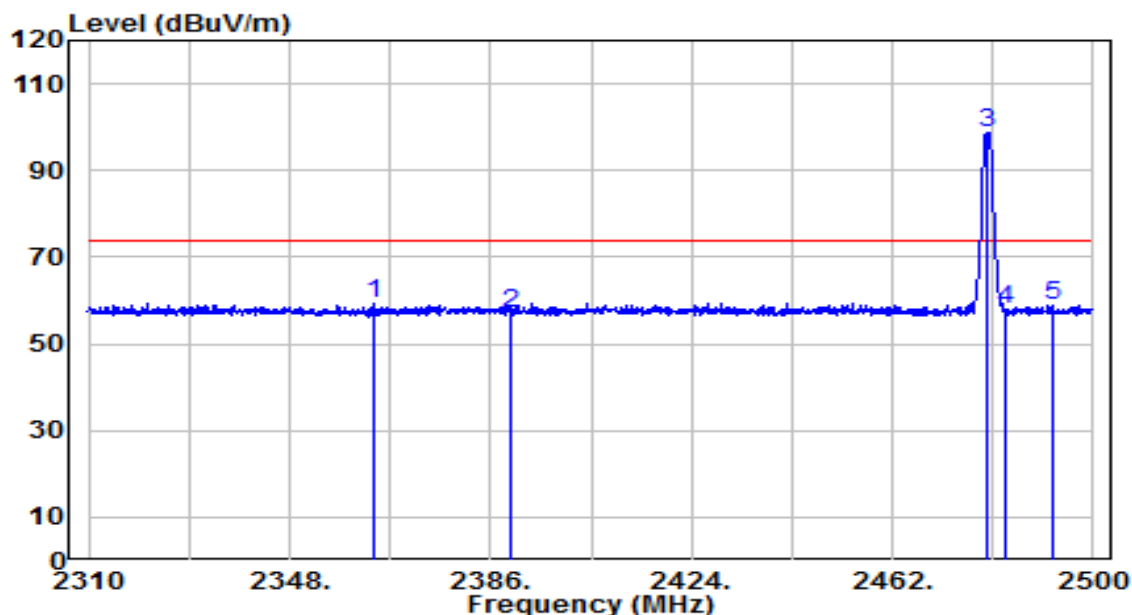


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	2363.800	26.99	32.18	59.17	-14.83	74.00	Peak
2		2390.000	24.81	32.30	57.10	-16.90	74.00	Peak
3		2479.700	66.11	32.69	98.80	N/A	N/A	Peak
4		2483.500	25.26	32.71	57.97	-16.03	74.00	Peak
5		2492.200	26.25	32.75	59.00	-15.00	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB) + Cable Loss (dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-10
Factor	BBHA 9120D	Temp. / Humidity	21.8°C/35%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by BLE at Channel 2480MHz - 1Mbps	Test Voltage	110V/60Hz

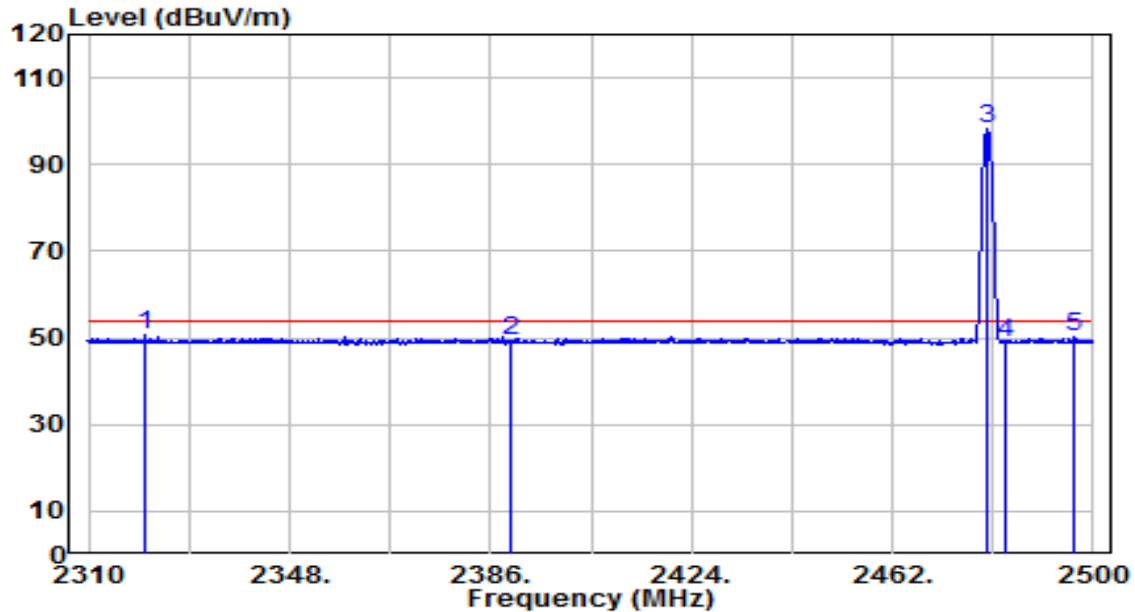


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	2320.700	18.71	31.99	50.70	-3.30	54.00	AV
2		2390.000	16.89	32.30	49.19	-4.81	54.00	AV
3		2480.000	65.49	32.69	98.18	N/A	N/A	AV
4		2483.500	16.35	32.71	49.06	-4.94	54.00	AV
5		2496.500	17.41	32.76	50.17	-3.83	54.00	AV

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB) + Cable Loss (dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-10
Factor	BBHA 9120D	Temp. / Humidity	21.8°C/35%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by BLE at Channel 2402MHz - 2Mbps	Test Voltage	110V/60Hz

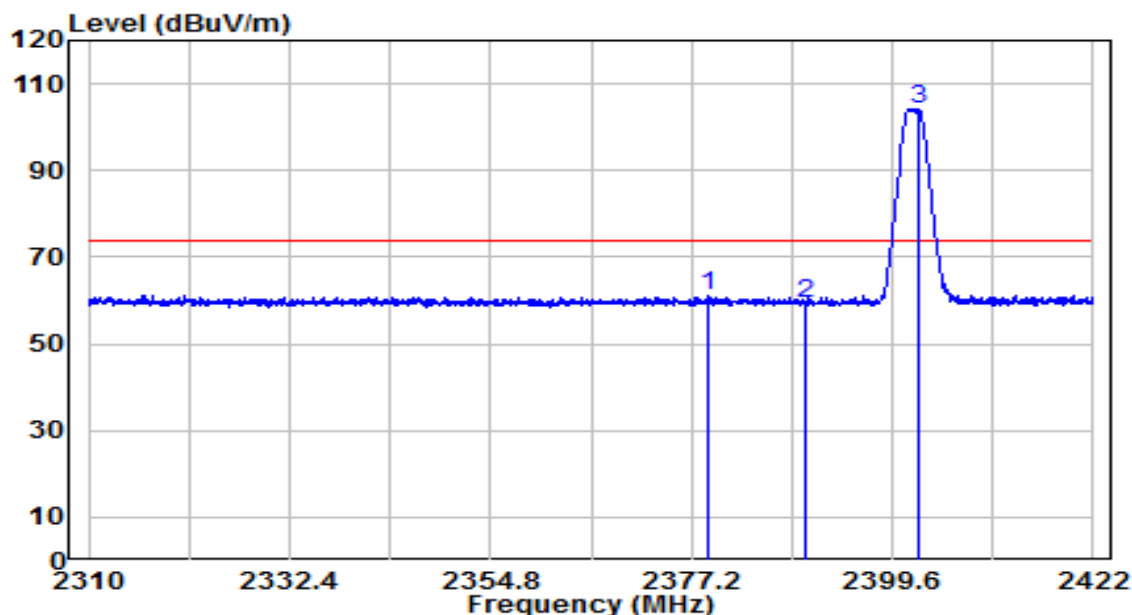


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	2379.160	28.79	32.25	61.04	-12.96	74.00	Peak
2		2390.000	26.88	32.30	59.18	-14.82	74.00	Peak
3		2402.456	71.90	32.35	104.25	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB) + Cable Loss (dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-10
Factor	BBHA 9120D	Temp. / Humidity	21.8°C/35%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by BLE at Channel 2402MHz - 2Mbps	Test Voltage	110V/60Hz

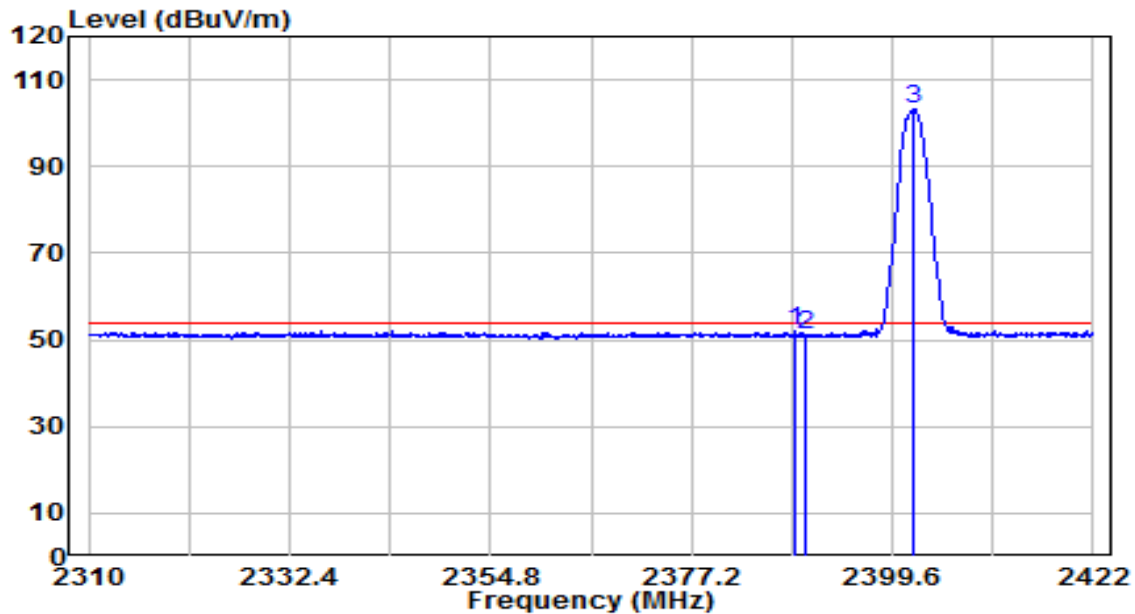


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	2388.680	19.63	32.29	51.92	-2.08	54.00	AV
2		2390.000	18.94	32.30	51.23	-2.77	54.00	AV
3		2402.064	70.93	32.35	103.28	N/A	N/A	AV

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB) + Cable Loss (dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-10
Factor	BBHA 9120D	Temp. / Humidity	21.8°C/35%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by BLE at Channel 2402MHz - 2Mbps	Test Voltage	110V/60Hz

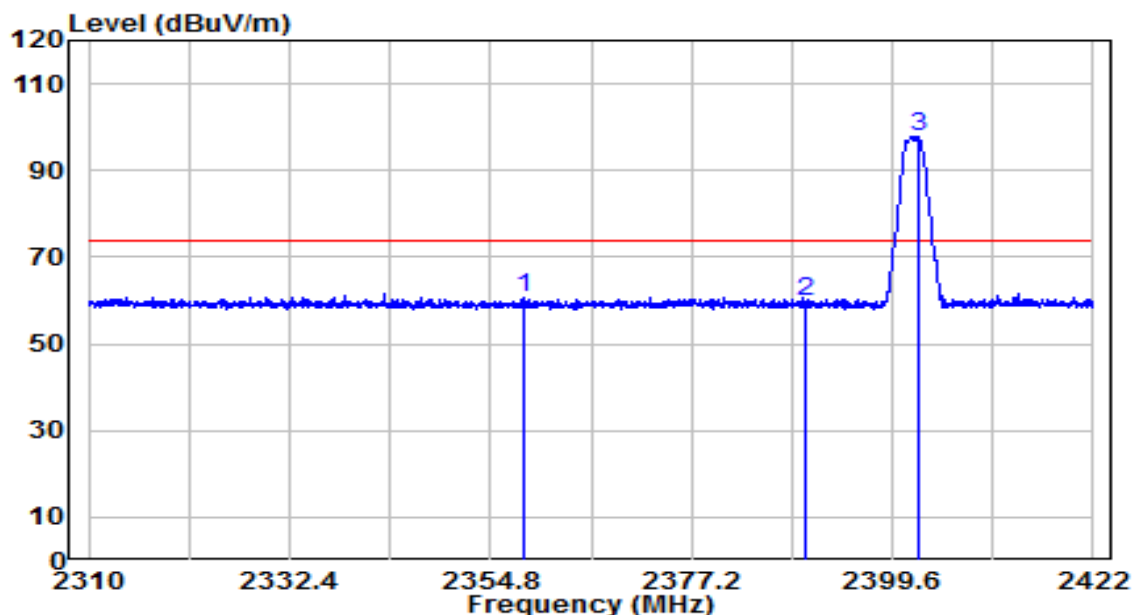


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	2358.552	28.48	32.16	60.64	-13.36	74.00	Peak
2		2390.000	27.57	32.30	59.86	-14.14	74.00	Peak
3		2402.512	65.56	32.35	97.91	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB) + Cable Loss (dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-10
Factor	BBHA 9120D	Temp. / Humidity	21.8°C/35%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by BLE at Channel 2402MHz - 2Mbps	Test Voltage	110V/60Hz

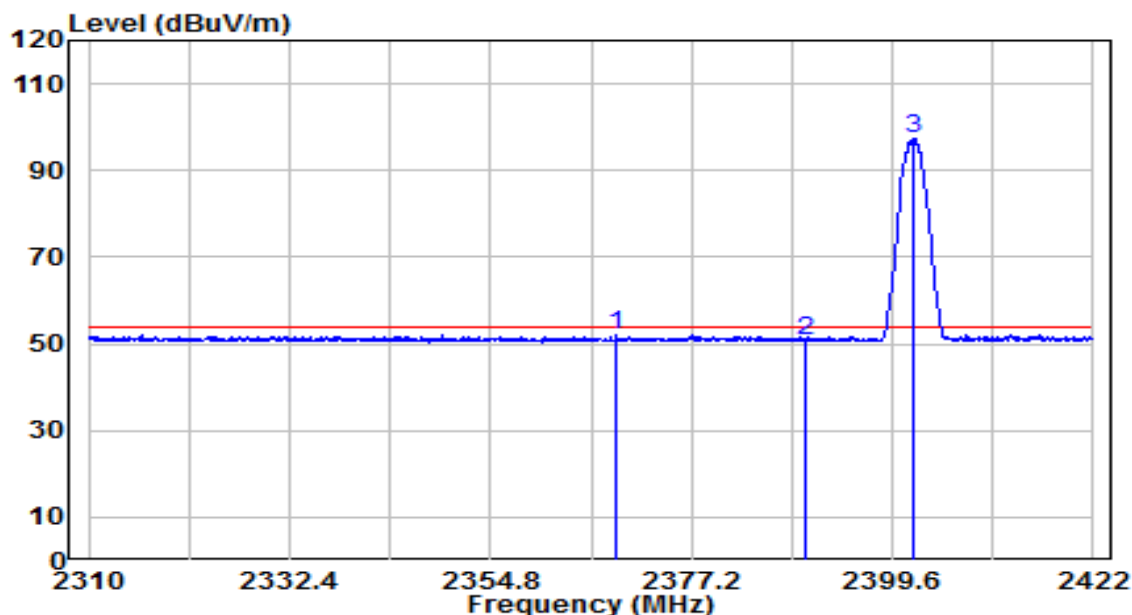


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	2368.800	19.82	32.20	52.02	-1.98	54.00	AV
2		2390.000	18.52	32.30	50.81	-3.19	54.00	AV
3		2401.952	64.95	32.35	97.30	N/A	N/A	AV

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB) + Cable Loss (dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-10
Factor	BBHA 9120D	Temp. / Humidity	21.8°C/35%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by BLE at Channel 2480MHz - 2Mbps	Test Voltage	110V/60Hz

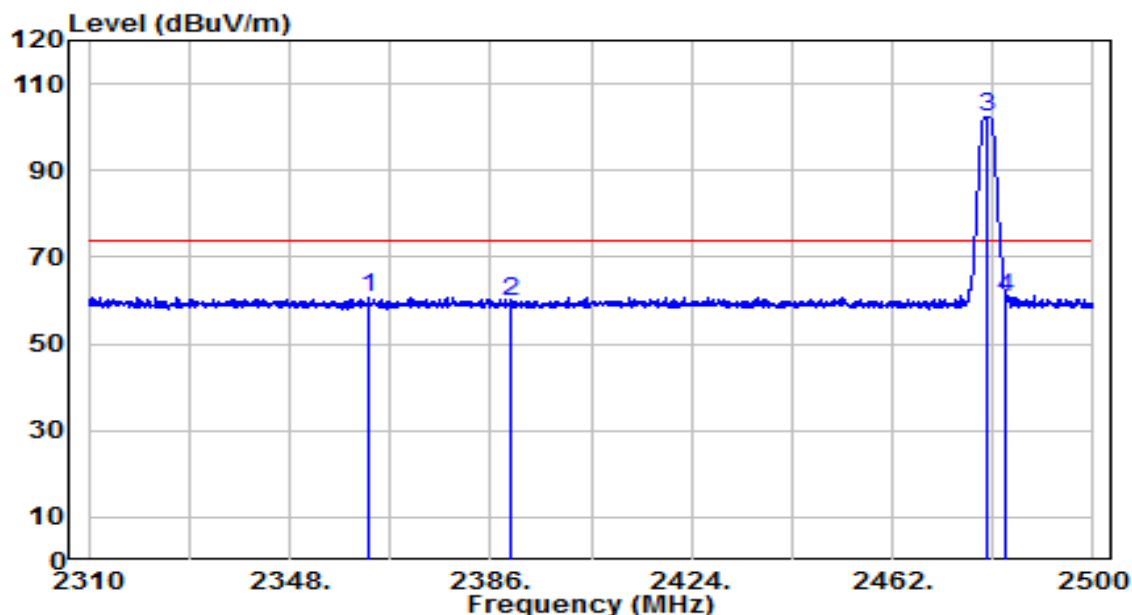


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	2362.820	28.63	32.18	60.81	-13.19	74.00	Peak
2		2390.000	27.69	32.30	59.99	-14.01	74.00	Peak
3		2479.955	69.81	32.69	102.50	N/A	N/A	Peak
4		2483.500	27.92	32.71	60.63	-13.37	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB) + Cable Loss (dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-10
Factor	BBHA 9120D	Temp. / Humidity	21.8°C/35%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by BLE at Channel 2480MHz - 2Mbps	Test Voltage	110V/60Hz

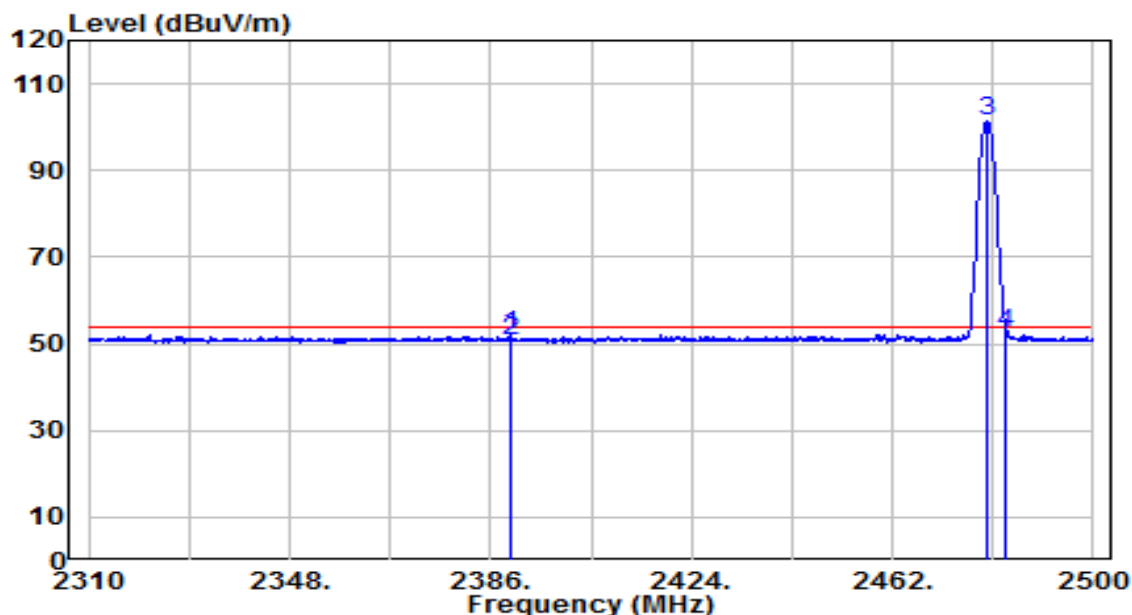


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	2389.610	19.59	32.29	51.89	-2.11	54.00	AV
2	2390.000	18.40	32.30	50.70	-3.30	54.00	AV
3	2479.955	68.94	32.69	101.63	N/A	N/A	AV
4	* 2483.500	19.92	32.71	52.63	-1.37	54.00	AV

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB) + Cable Loss (dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-10
Factor	BBHA 9120D	Temp. / Humidity	21.8°C/35%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by BLE at Channel 2480MHz - 2Mbps	Test Voltage	110V/60Hz

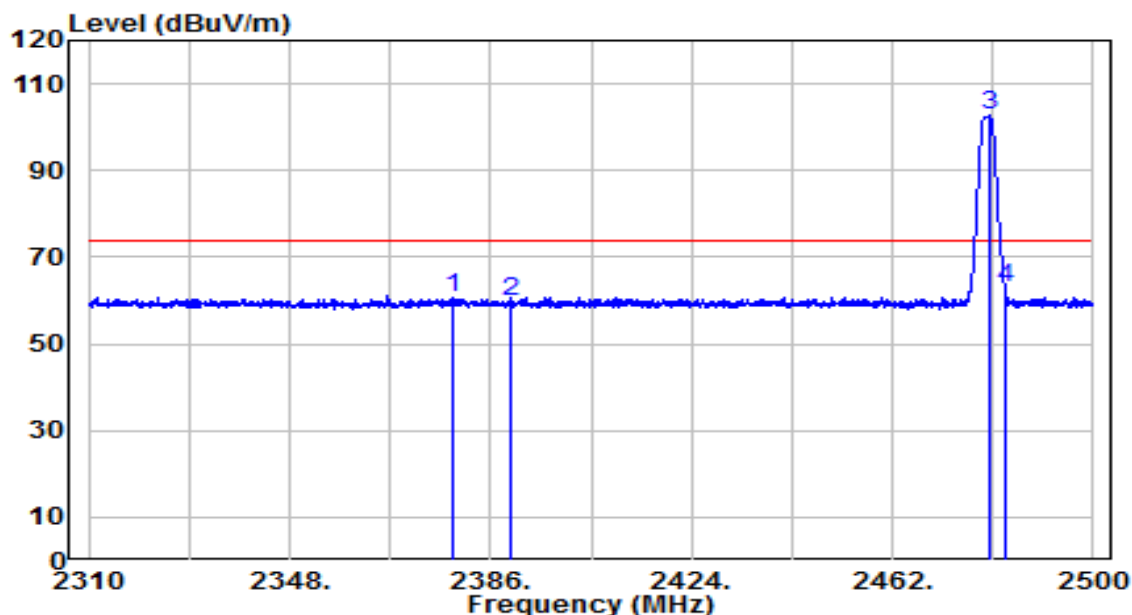


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	2378.780	28.47	32.25	60.72	-13.28	74.00	Peak
2	2390.000	27.35	32.30	59.64	-14.36	74.00	Peak
3	2480.525	69.93	32.69	102.63	N/A	N/A	Peak
4	* 2483.500	30.15	32.71	62.86	-11.14	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB) + Cable Loss (dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-10
Factor	BBHA 9120D	Temp. / Humidity	21.8°C/35%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by BLE at Channel 2480MHz - 2Mbps	Test Voltage	110V/60Hz

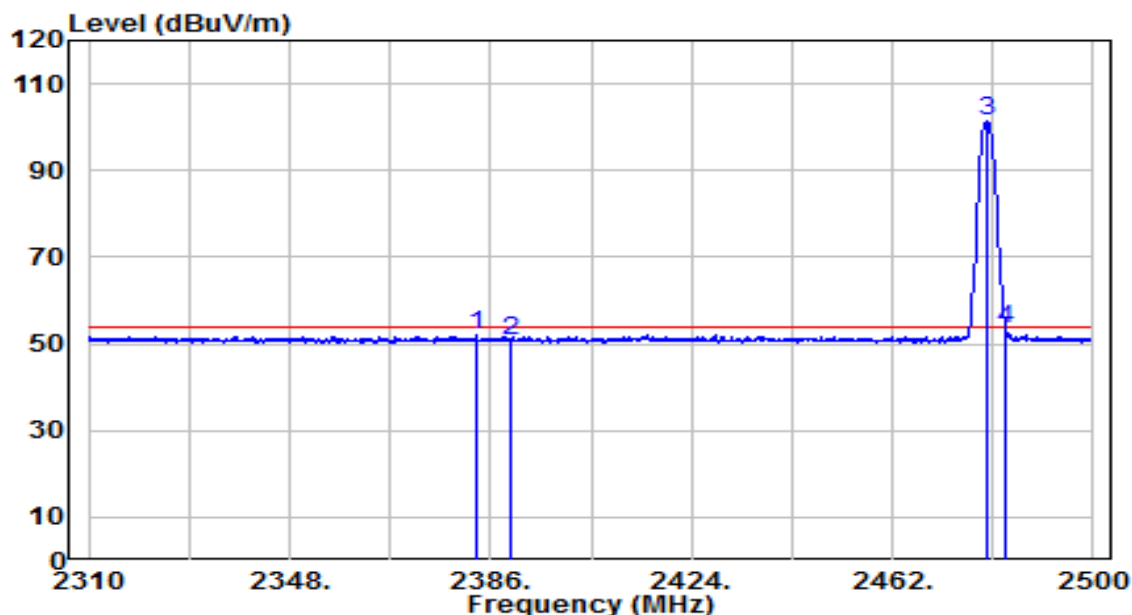


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	2383.340	19.70	32.27	51.97	-2.03	54.00	AV
2	2390.000	18.49	32.30	50.79	-3.21	54.00	AV
3	2479.955	68.95	32.69	101.64	N/A	N/A	AV
4	* 2483.500	20.52	32.71	53.23	-0.77	54.00	AV

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB) + Cable Loss (dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Filter Configuration 5#

EUT	ACCESS POINT	Date of Test	2021-05-06
Factor	BBHA 9120D	Temp. / Humidity	23.2°C/33%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by BLE at Channel 2402MHz - 2Mbps	Test Voltage	110V/60Hz

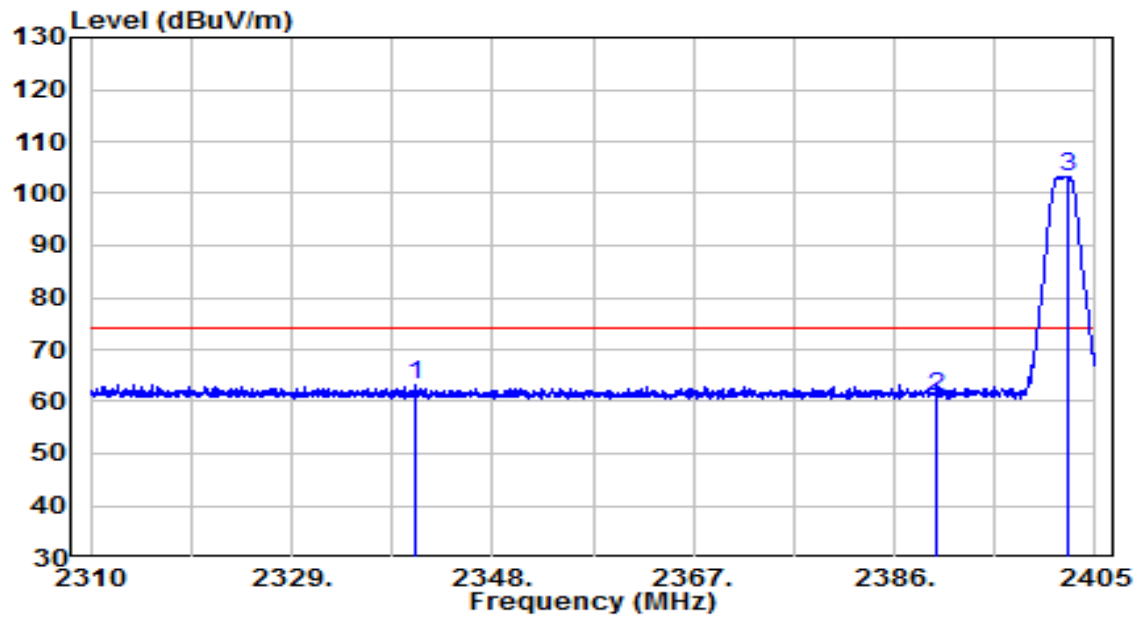


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	* 2340.685	31.08	32.08	63.16	-10.84	74.00	Peak
2	2390.000	28.77	32.30	61.07	-12.93	74.00	Peak
3	2402.482	71.03	32.35	103.38	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. For filter 5#, the worst case was performed in the report.

EUT	ACCESS POINT	Date of Test	2021-05-06
Factor	BBHA 9120D	Temp. / Humidity	23.2°C/33%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by BLE at Channel 2402MHz - 2Mbps	Test Voltage	110V/60Hz

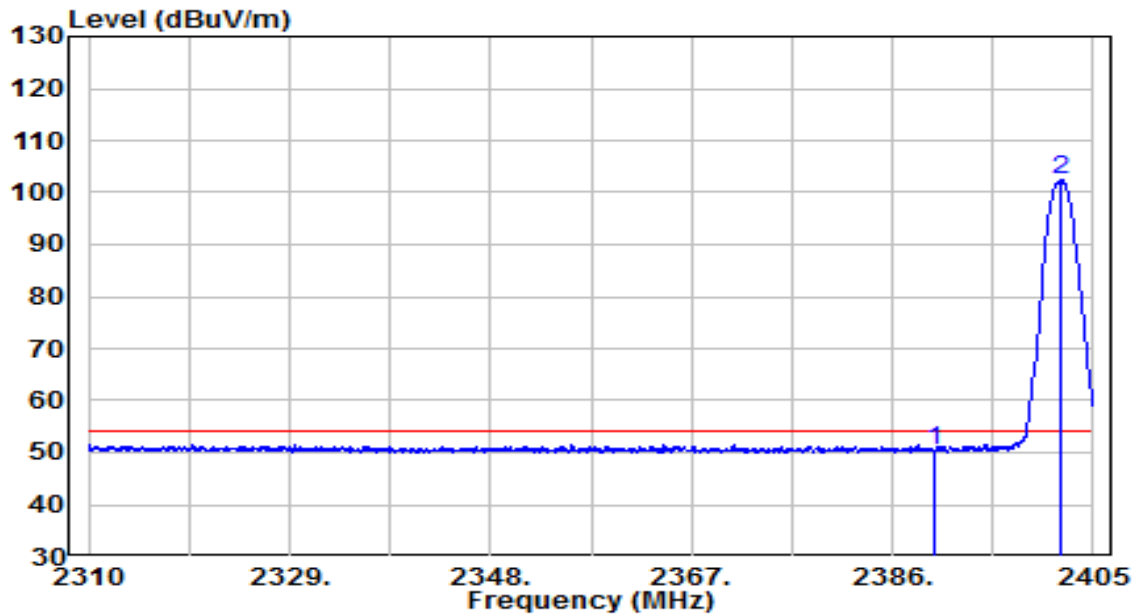


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	2390.000	18.02	32.30	50.32	-3.68	54.00	AV
2		2402.008	70.13	32.35	102.48	N/A	N/A	AV

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.
5. For filter 5#, the worst case was performed in the report.

EUT	ACCESS POINT	Date of Test	2021-05-06
Factor	BBHA 9120D	Temp. / Humidity	23.2°C/33%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by BLE at Channel 2402MHz - 2Mbps	Test Voltage	110V/60Hz

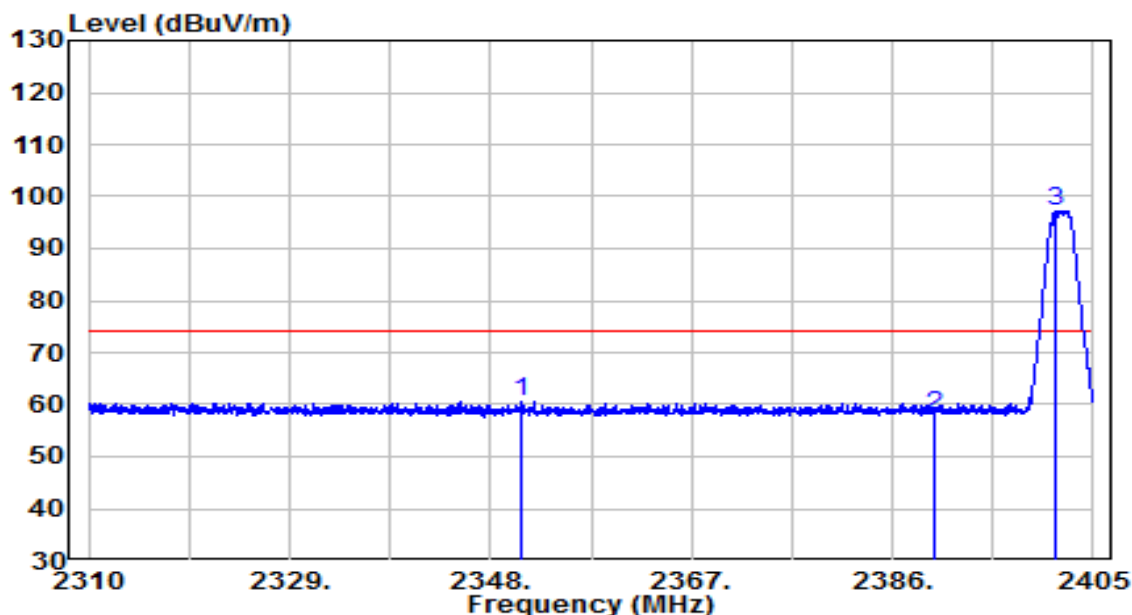


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	2350.802	28.39	32.12	60.52	-13.48	74.00	Peak
2		2390.000	25.79	32.30	58.09	-15.91	74.00	Peak
3		2401.532	64.87	32.35	97.22	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. For filter 5#, the worst case was performed in the report.

EUT	ACCESS POINT	Date of Test	2021-05-06
Factor	BBHA 9120D	Temp. / Humidity	23.2°C/33%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by BLE at Channel 2402MHz - 2Mbps	Test Voltage	110V/60Hz

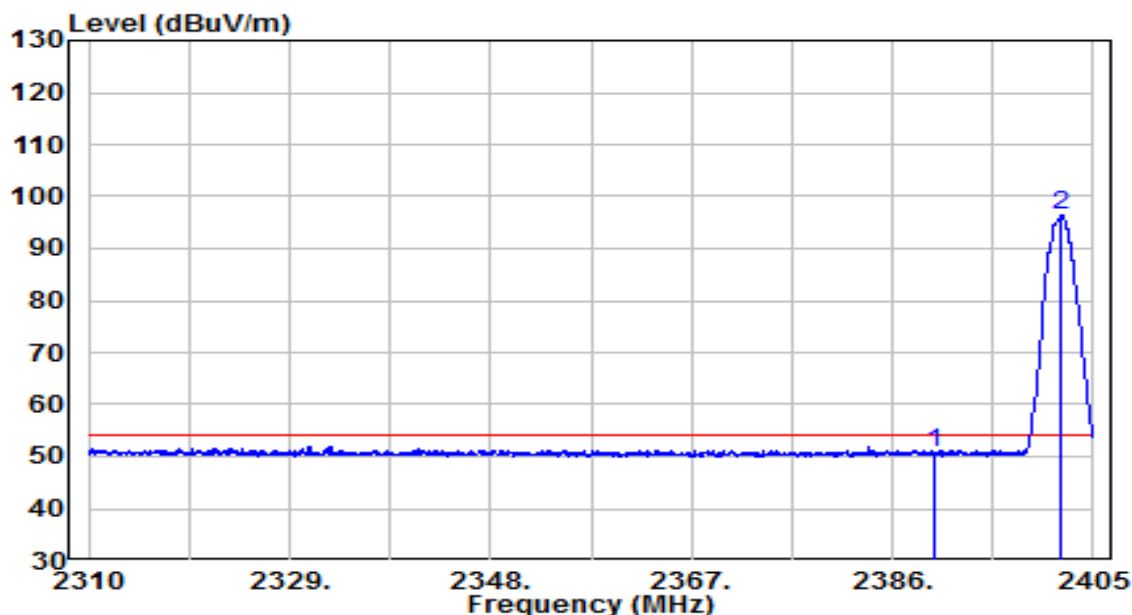


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	2390.000	18.35	32.30	50.65	-3.35	54.00	AV
2		2402.008	63.89	32.35	96.24	N/A	N/A	AV

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.
5. For filter 5#, the worst case was performed in the report.

Filter Configuration 6#

EUT	ACCESS POINT	Date of Test	2021-05-06
Factor	BBHA 9120D	Temp. / Humidity	23.2°C/33%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by BLE at Channel 2480MHz - 2Mbps	Test Voltage	110V/60Hz

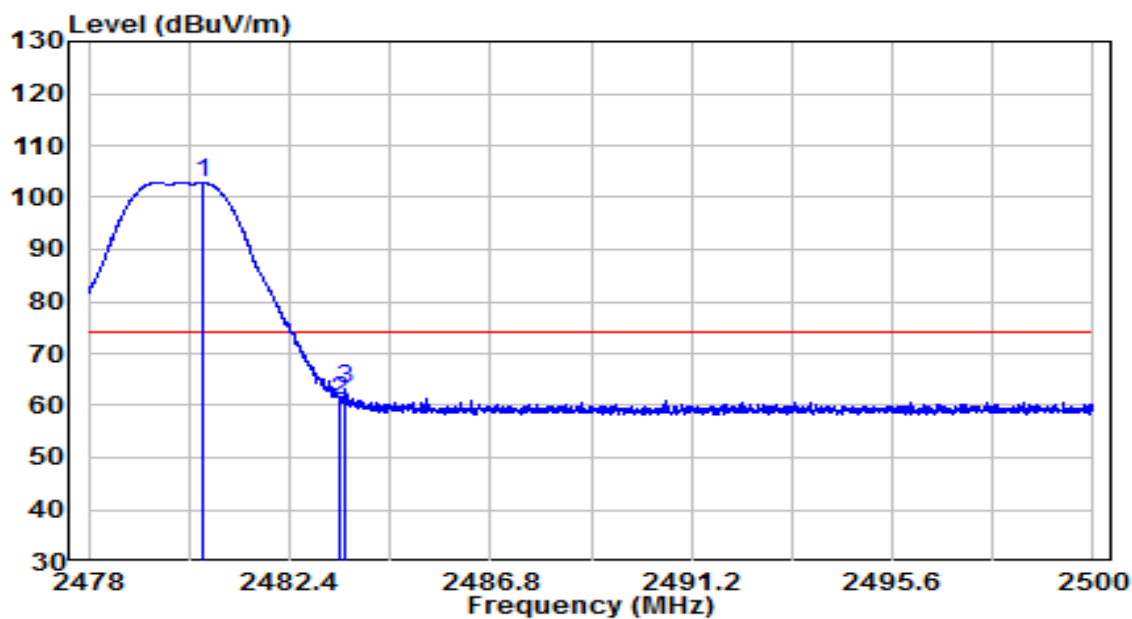


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	2480.486	70.20	32.69	102.90	N/A	N/A	Peak
2	2483.500	28.17	32.71	60.87	-13.13	74.00	Peak
3	* 2483.610	30.46	32.71	63.17	-10.83	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. For filter 6#, the worst case was performed in the report.

EUT	ACCESS POINT	Date of Test	2021-05-06
Factor	BBHA 9120D	Temp. / Humidity	23.2°C/33%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by BLE at Channel 2480MHz - 2Mbps	Test Voltage	110V/60Hz

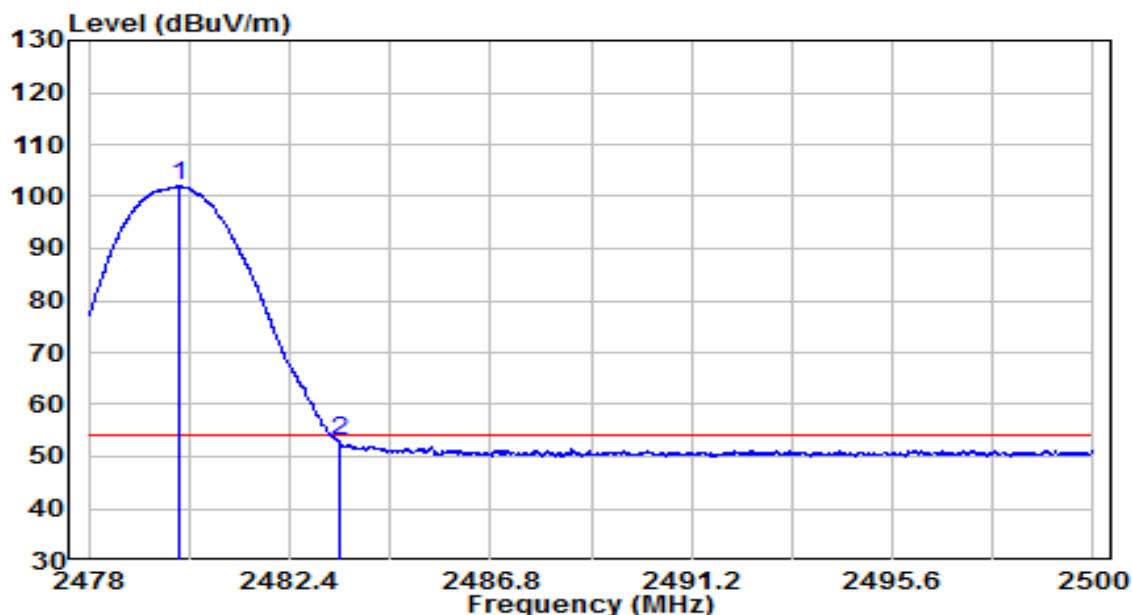


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	2479.958	69.22	32.69	101.92	N/A	N/A	AV
2	* 2483.500	20.24	32.71	52.94	-1.06	54.00	AV

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. For filter 6#, the worst case was performed in the report.

EUT	ACCESS POINT	Date of Test	2021-05-06
Factor	BBHA 9120D	Temp. / Humidity	23.2°C/33%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by BLE at Channel 2480MHz - 2Mbps	Test Voltage	110V/60Hz

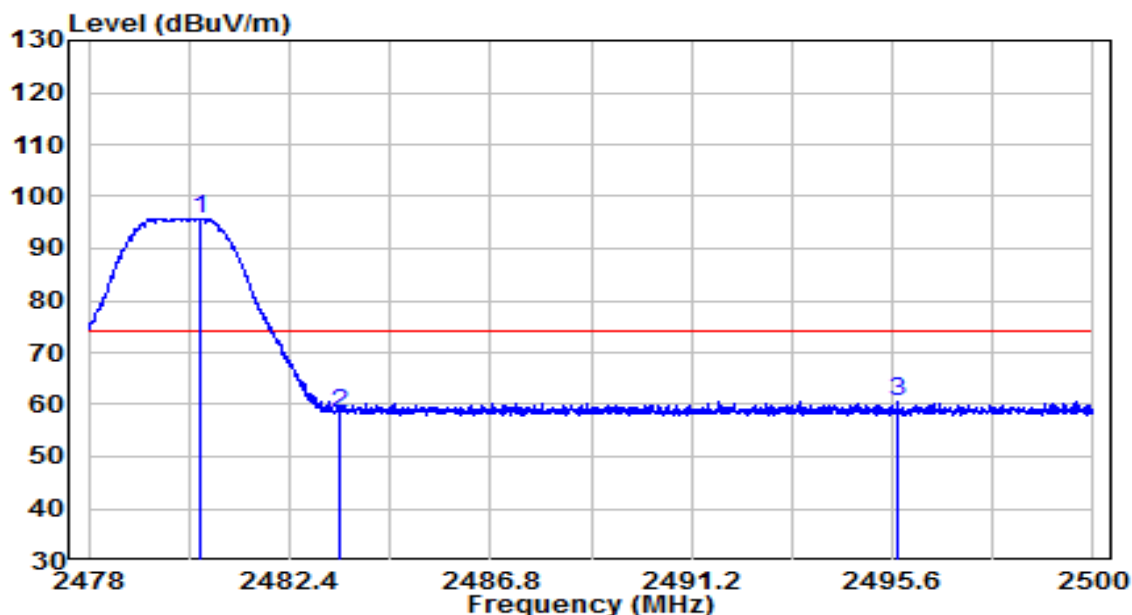


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	2480.431	63.15	32.69	95.84	N/A	N/A	Peak
2	2483.500	25.76	32.71	58.47	-15.53	74.00	Peak
3	* 2495.699	27.79	32.76	60.55	-13.45	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. For filter 6#, the worst case was performed in the report.

EUT	ACCESS POINT	Date of Test	2021-05-06
Factor	BBHA 9120D	Temp. / Humidity	23.2°C/33%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by BLE at Channel 2480MHz - 2Mbps	Test Voltage	110V/60Hz

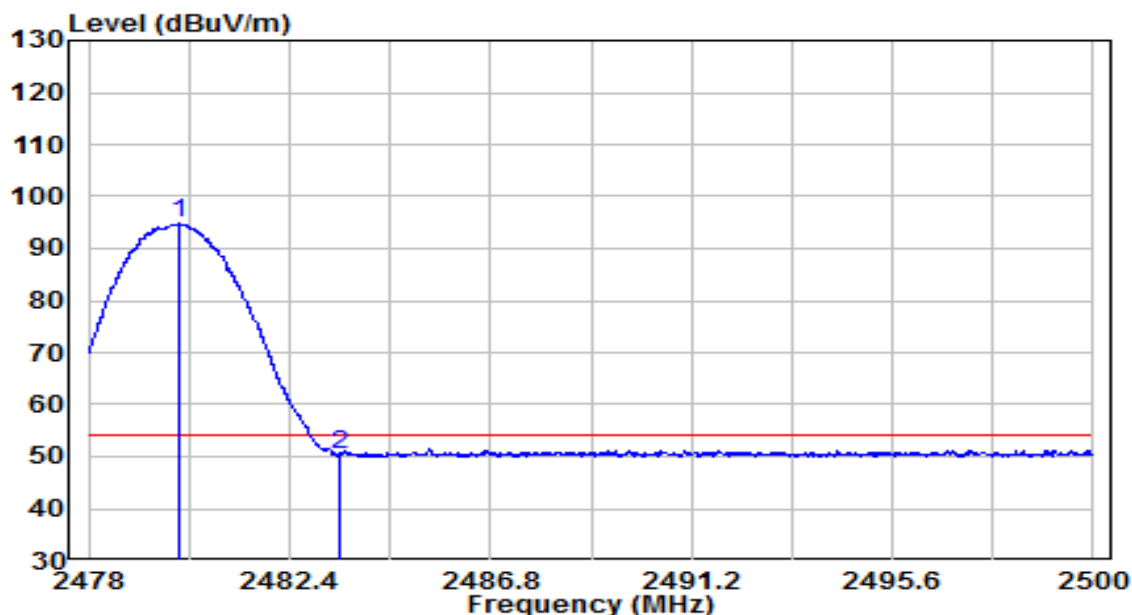

No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	2479.980	62.07	32.69	94.76	N/A	N/A	AV
2	* 2483.500	17.78	32.71	50.49	-3.51	54.00	AV

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. For filter 6#, the worst case was performed in the report.

5.7. 占用頻寬

5.7.1 量測方法


待測物之天線埠經由適當之衰減直接連至頻譜分析儀RF輸入端，頻譜分析儀之設定,參考如下:

- (1) Set RBW = 100 kHz
- (2) VBW $\geq 3 \times$ RBW
- (3) Detector = Peak
- (4) Trace mode = max hold
- (5) Sweep = auto couple

5.7.2 限制要求

6dB頻寬至少應有500kHz。


5.7.3 測試架構圖

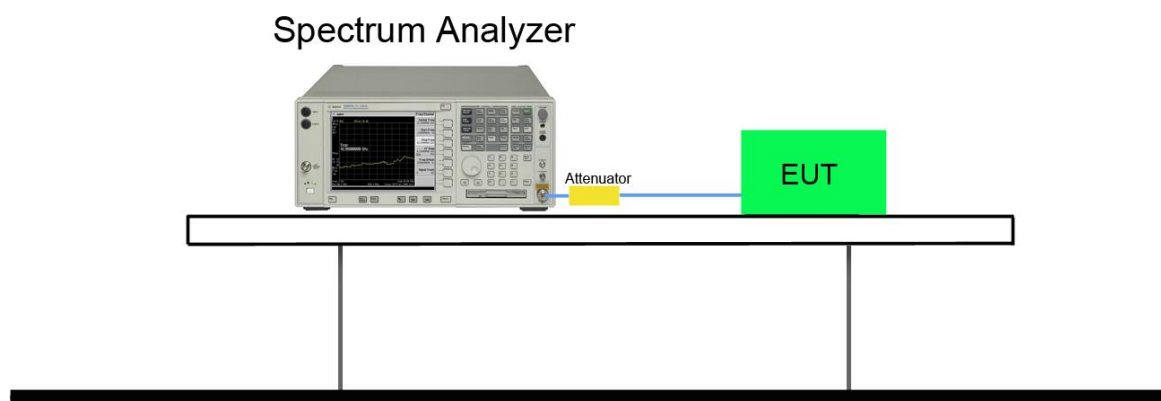


5.7.4 占用頻寬測試結果

待測物名稱	ACCESS POINT	測試日期	2021/1/22
待測物型號	APIN0635	溫度 / 濕度	23°C / 55%
測試場地 / 測試工程師	SR2 / Eric	測試模式	Filter 4#

Test Mode	Channel No.	Frequency (MHz)	6dB Bandwidth (MHz)	Limit (MHz)	Result
LE (1Mbps)	00	2402	0.692	≥ 0.5	Pass
LE (1Mbps)	19	2440	0.690	≥ 0.5	Pass
LE (1Mbps)	39	2480	0.689	≥ 0.5	Pass
LE (2Mbps)	00	2402	1.184	≥ 0.5	Pass
LE (2Mbps)	19	2440	1.187	≥ 0.5	Pass
LE (2Mbps)	39	2480	1.183	≥ 0.5	Pass

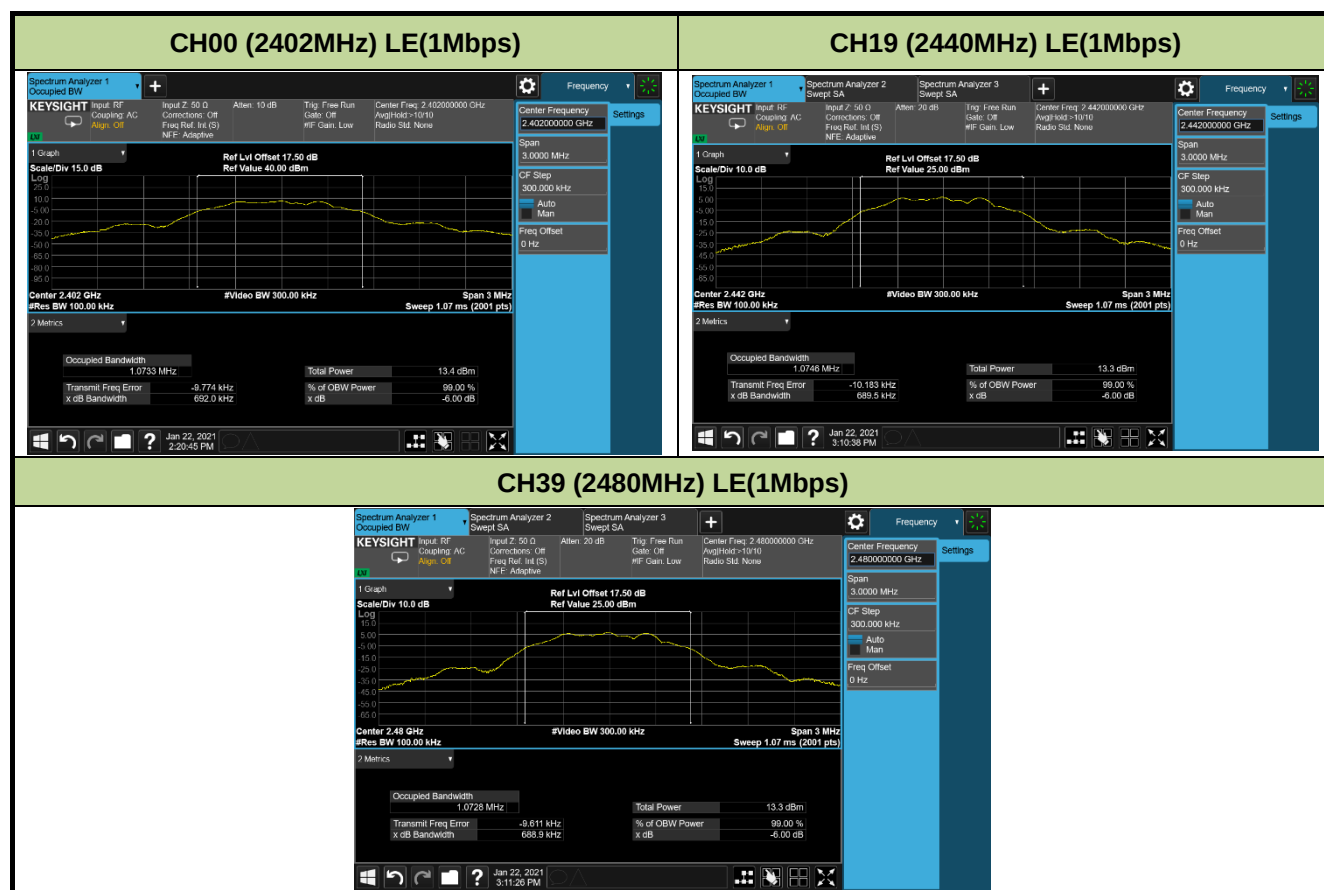

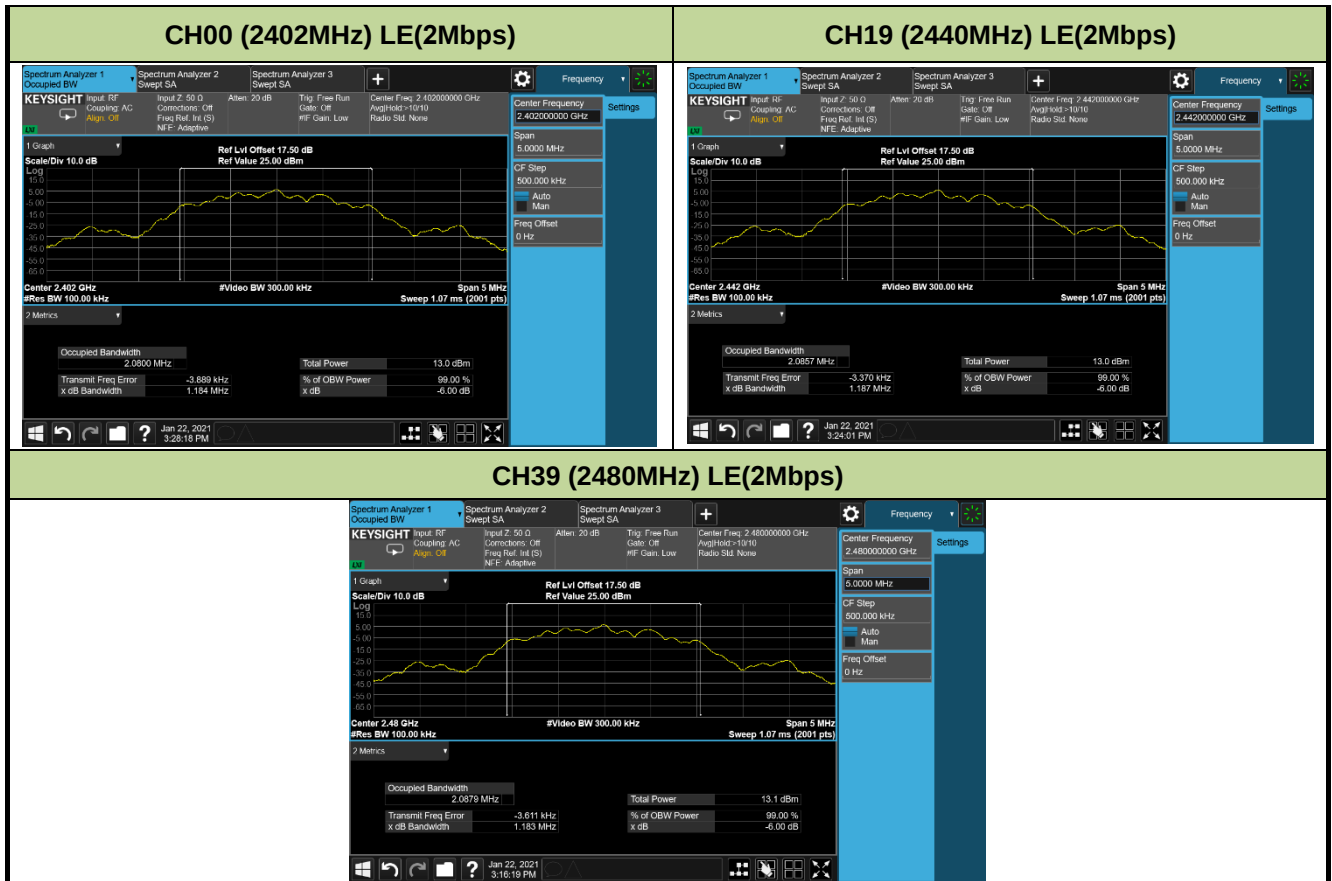

5.8. 功率頻譜密度

5.8.1 量測方法

將發射機之天線埠經由適當之衰減直接連至測試儀器。找出發射峰值並擴展於通帶內，設定解析頻寬為3 kHz，視訊頻寬大於解析頻寬，掃描時間為頻率掃描範圍除以3 kHz。所測得之峰值位準必須應小於或等於8 dBm。

若受測裝置之頻譜線間隔小於3 kHz，測量時應將解析頻寬降低以使頻譜線間隔大於3kHz，所測得之數據再藉加總3 kHz 頻帶內所有個別頻譜線之功率(即標準化至3 kHz)以決定是否符合規定。

5.8.2 限制要求


在使用頻率範圍之任意3千赫(kHz)頻寬內，由發射機傳導至天線之峰值發射電功率密度在任意期間內，皆不得大於8dBm。

若用於非固定式點對點操作時，若其發射天線之方向性增益超過6dBi，應依所超過之dB數等量降低峰值輸出功率。如用於固定式點對點(註)操作時，應符合下列情形之一：

(1)操作於2400-2483.5兆赫(MHz)者，其發射天線之方向性增益超過6dBi，應於每超過3dB降低1dB之峰值輸出功率。

(2) 操作於5725-5850兆赫(MHz)者，其發射天線之方向性增益超過6dBi，不需降低峰值輸出功率。


5.8.3 測試架構圖

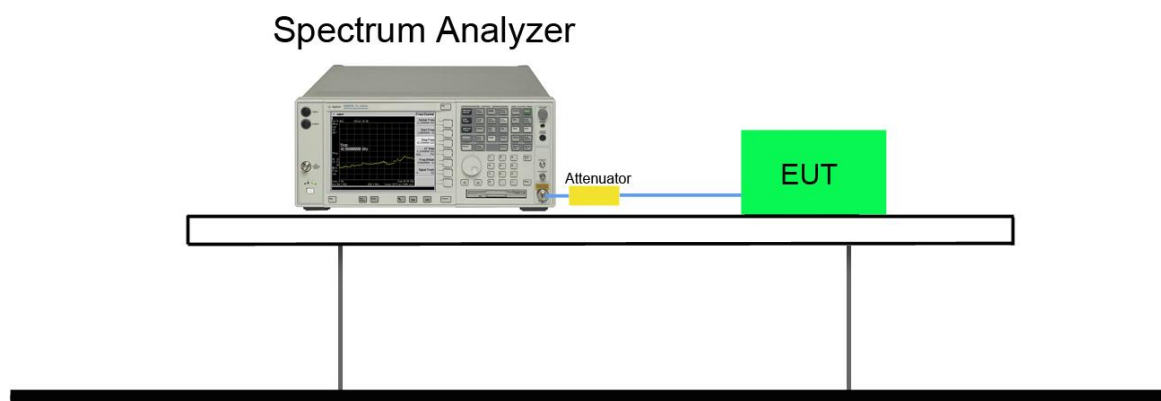


5.8.4 功率頻譜密度測試結果

待測物名稱	ACCESS POINT	測試日期	2021/1/22
待測物型號	APIN0635	溫度 / 濕度	23°C / 55%
測試場地 / 測試工程師	SR2 / Eric	測試模式	Filter 4#

Test Mode	Channel No.	Frequency (MHz)	PSD Result (dBm / 3kHz)	Limit (dBm / 3kHz)	Result
LE (1Mbps)	00	2402	-10.37	≤ 8	Pass
LE (1Mbps)	19	2440	-10.46	≤ 8	Pass
LE (1Mbps)	39	2480	-10.57	≤ 8	Pass
LE (2Mbps)	00	2402	-13.48	≤ 8	Pass
LE (2Mbps)	19	2440	-13.32	≤ 8	Pass
LE (2Mbps)	39	2480	-13.26	≤ 8	Pass

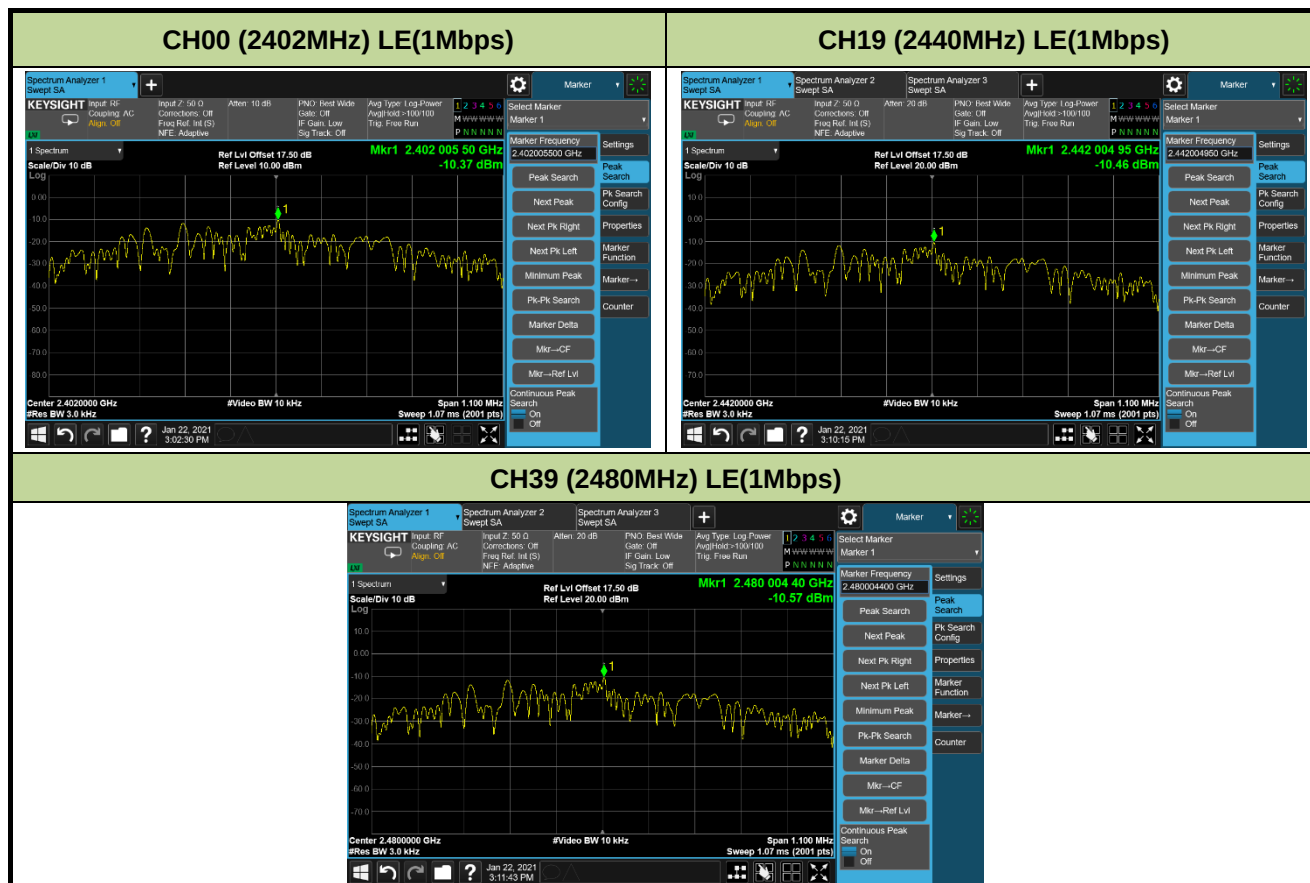

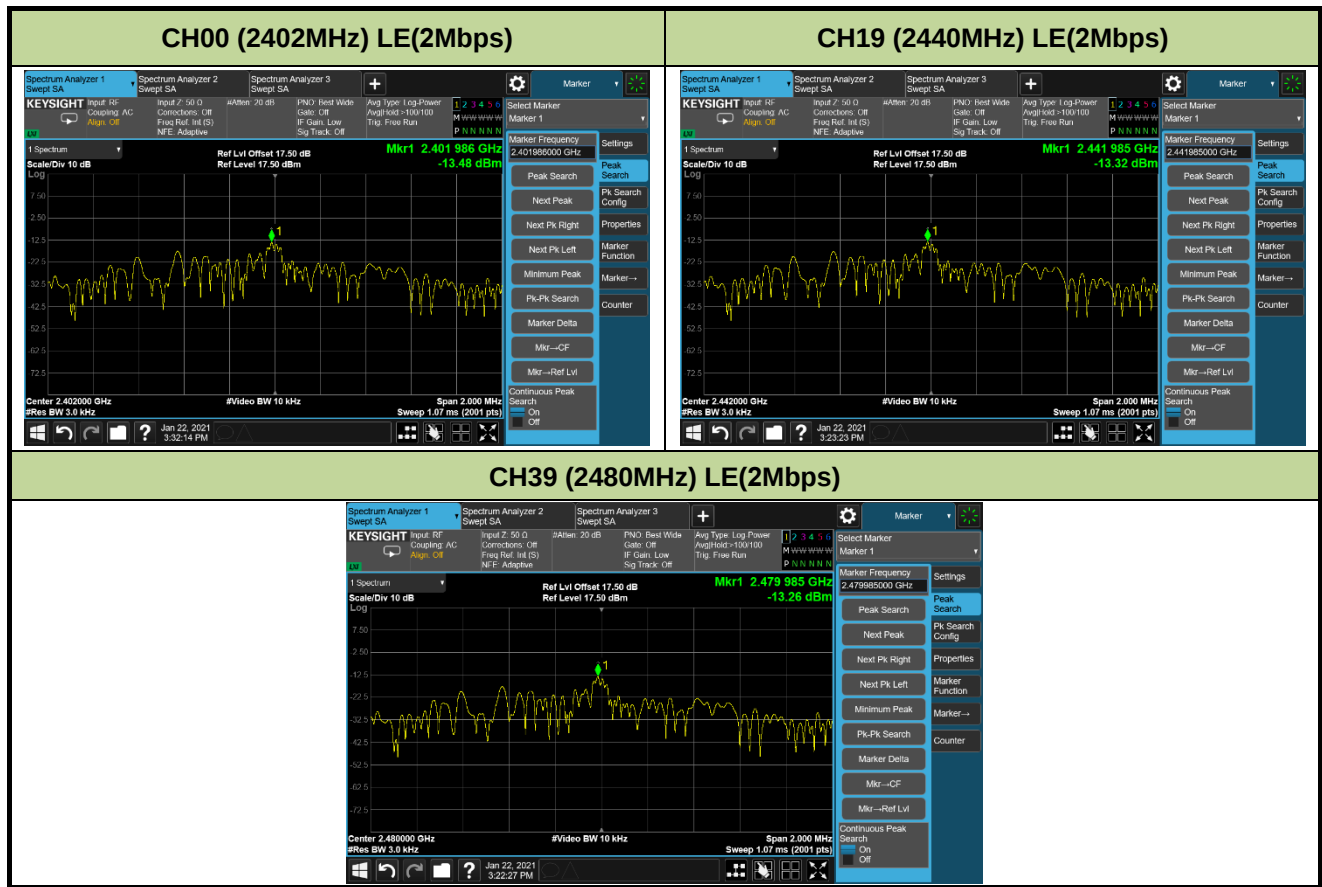

The End