


Site: AC1	Time: 2018/06/27 - 06:39
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11ax-HE40 at Channel 5310MHz	

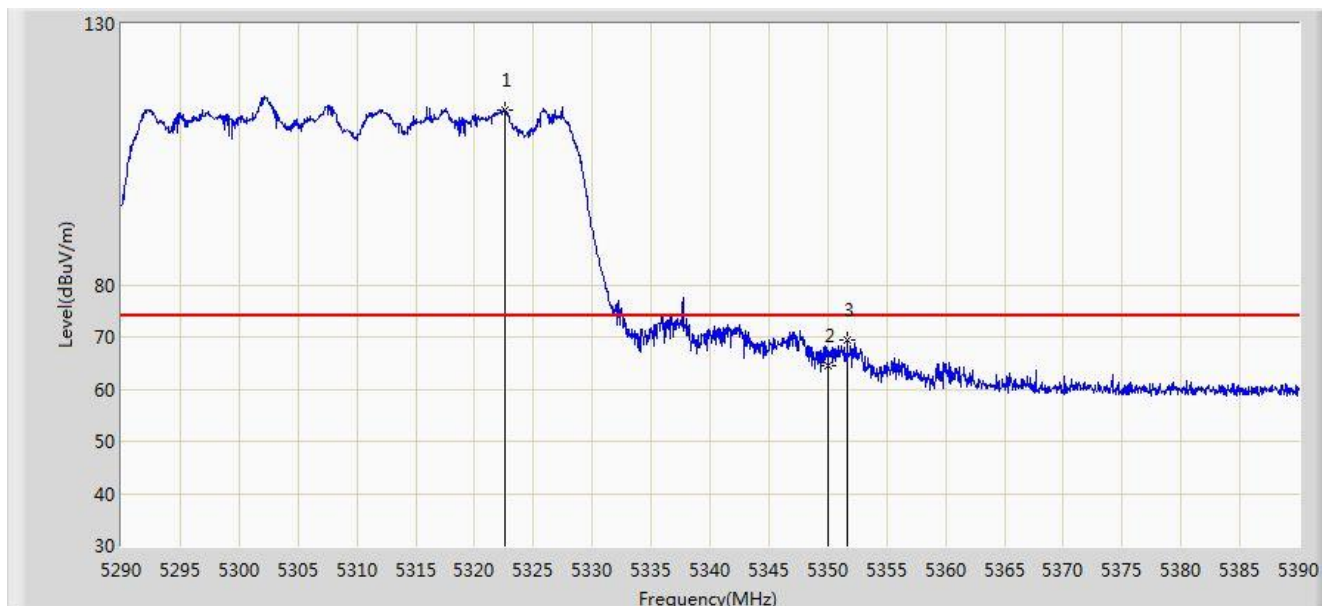


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5322.600	113.406	109.552	N/A	N/A	3.853	PK
2			5350.000	64.355	60.450	-9.645	74.000	3.904	PK
3			5351.650	69.537	65.629	-4.463	74.000	3.908	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/27 - 06:38
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11ax-HE40 at Channel 5310MHz	

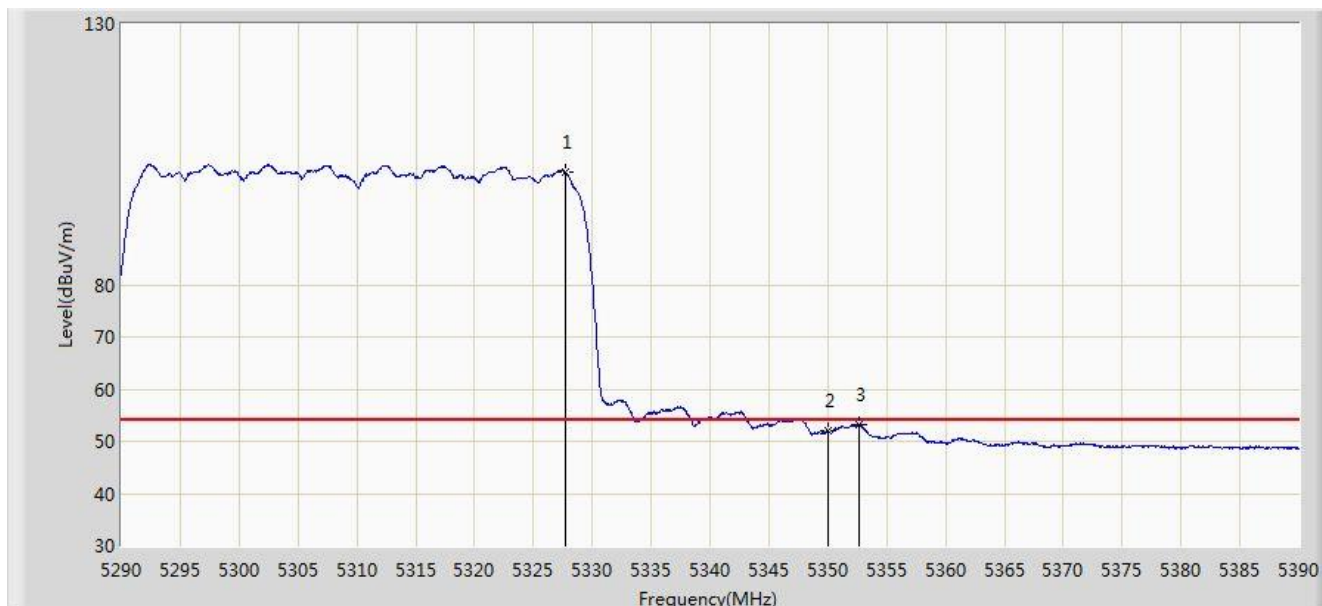


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5327.750	101.598	97.735	N/A	N/A	3.864	AV
2			5350.000	52.023	48.118	-1.977	54.000	3.904	AV
3			5352.600	53.252	49.343	-0.748	54.000	3.909	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/27 - 06:46
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11ax-HE40 at Channel 5510MHz	

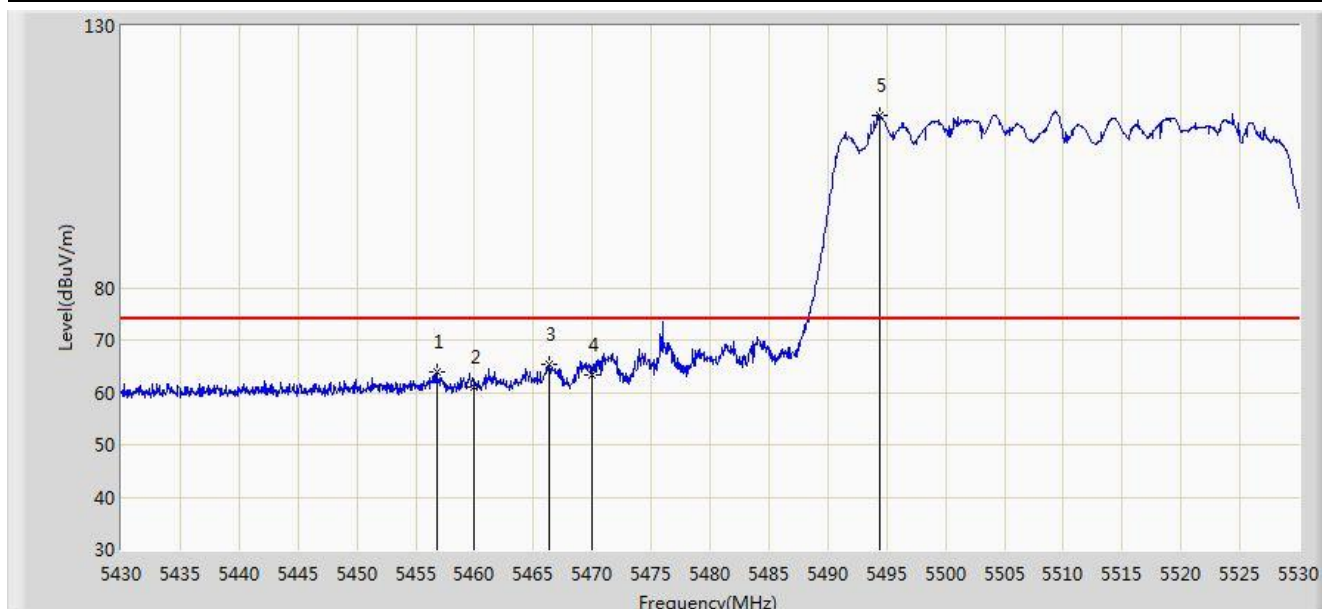


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5456.800	63.820	59.647	-10.180	74.000	4.173	PK
2			5460.000	60.940	56.760	-13.060	74.000	4.180	PK
3			5466.400	65.355	61.161	-2.845	68.200	4.194	PK
4			5470.000	63.272	59.070	-4.928	68.200	4.202	PK
5		*	5494.450	112.815	108.557	N/A	N/A	4.258	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/27 - 06:48
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11ax-HE40 at Channel 5510MHz	

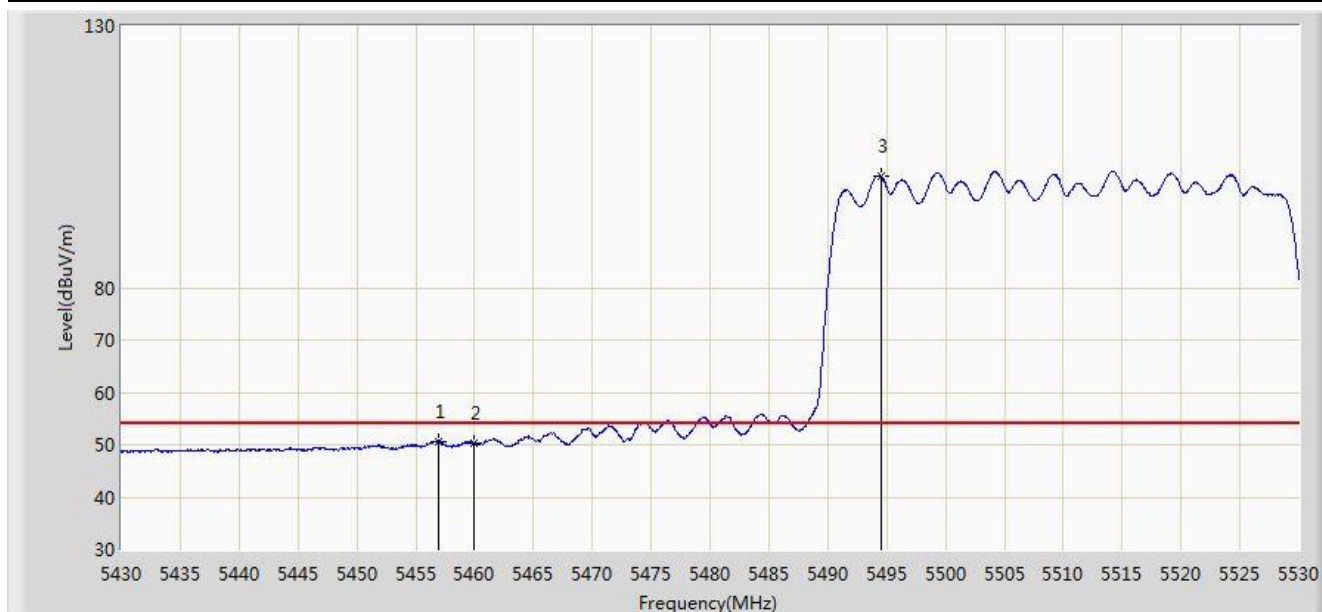


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5456.900	50.708	46.534	-3.292	54.000	4.173	AV
2			5460.000	50.165	45.985	-3.835	54.000	4.180	AV
3		*	5494.500	101.325	97.067	N/A	N/A	4.259	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/27 - 06:43
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11ax-HE40 at Channel 5510MHz	

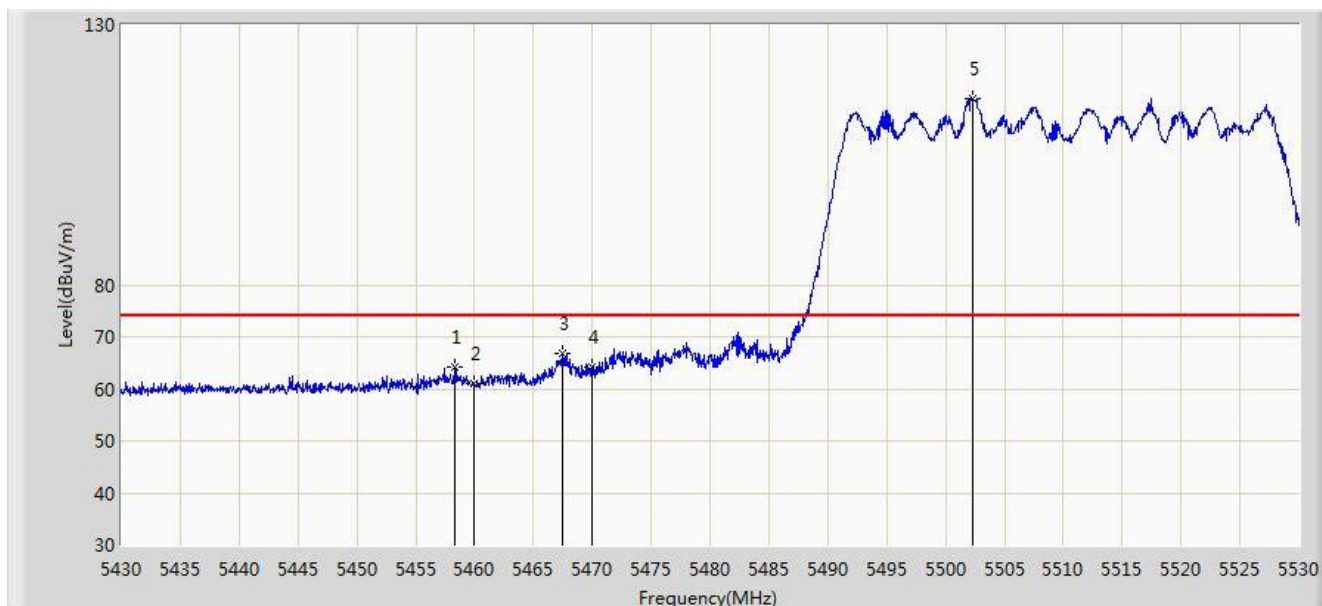


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5458.300	64.145	59.968	-9.855	74.000	4.177	PK
2			5460.000	61.076	56.896	-12.924	74.000	4.180	PK
3			5467.500	66.771	62.574	-1.429	68.200	4.197	PK
4			5470.000	64.189	59.987	-4.011	68.200	4.202	PK
5		*	5502.300	115.927	111.648	N/A	N/A	4.278	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/27 - 06:46
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11ax-HE40 at Channel 5510MHz	

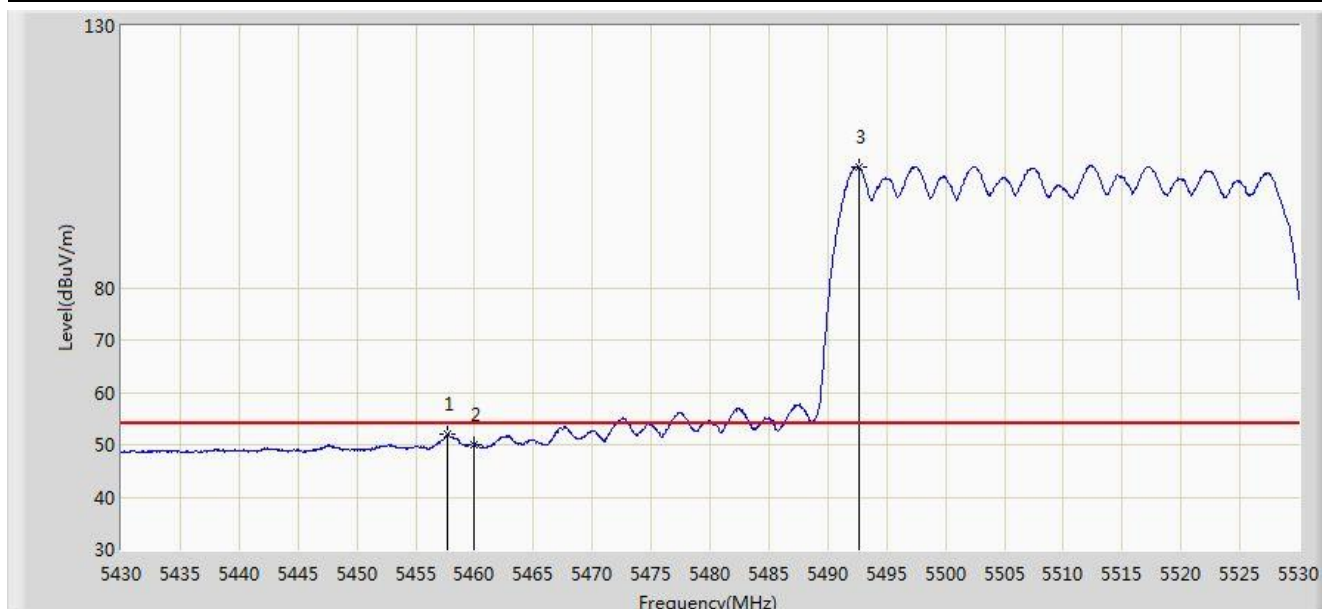


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5457.750	51.928	47.752	-2.072	54.000	4.176	AV
2			5460.000	50.078	45.898	-3.922	54.000	4.180	AV
3		*	5492.600	102.984	98.730	N/A	N/A	4.254	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/27 - 06:59
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11ax-HE40 at Channel 5670MHz	

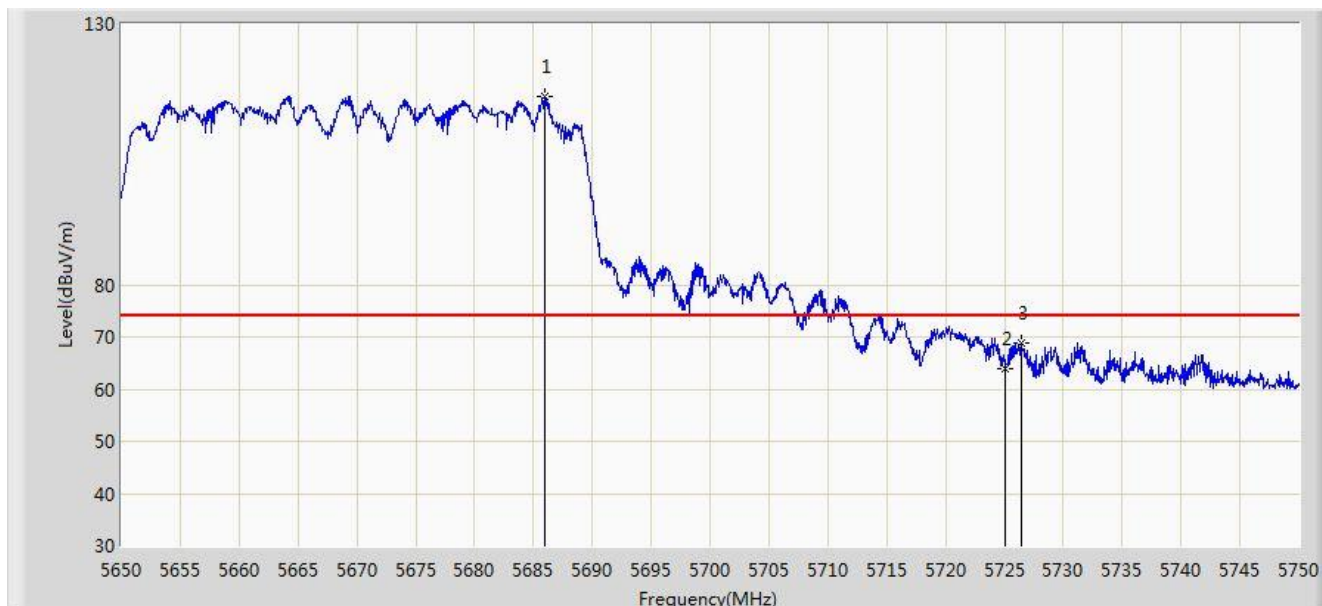


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5686.000	116.111	111.300	N/A	N/A	4.811	PK
2			5725.000	63.973	58.944	-10.027	74.000	5.029	PK
3			5726.450	68.928	63.890	-5.072	74.000	5.039	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/27 - 07:00
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11ax-HE40 at Channel 5670MHz	

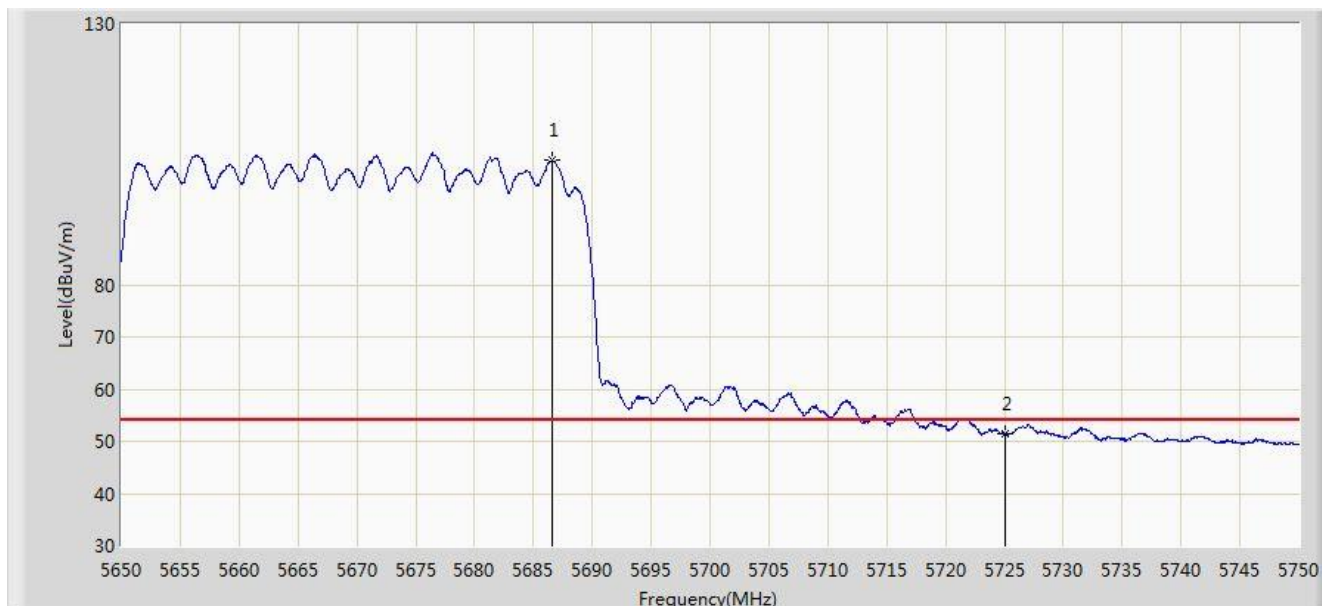


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5686.650	103.813	98.999	N/A	N/A	4.815	AV
2			5725.000	51.347	46.318	-2.653	54.000	5.029	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/27 - 06:57
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11ax-HE40 at Channel 5670MHz	

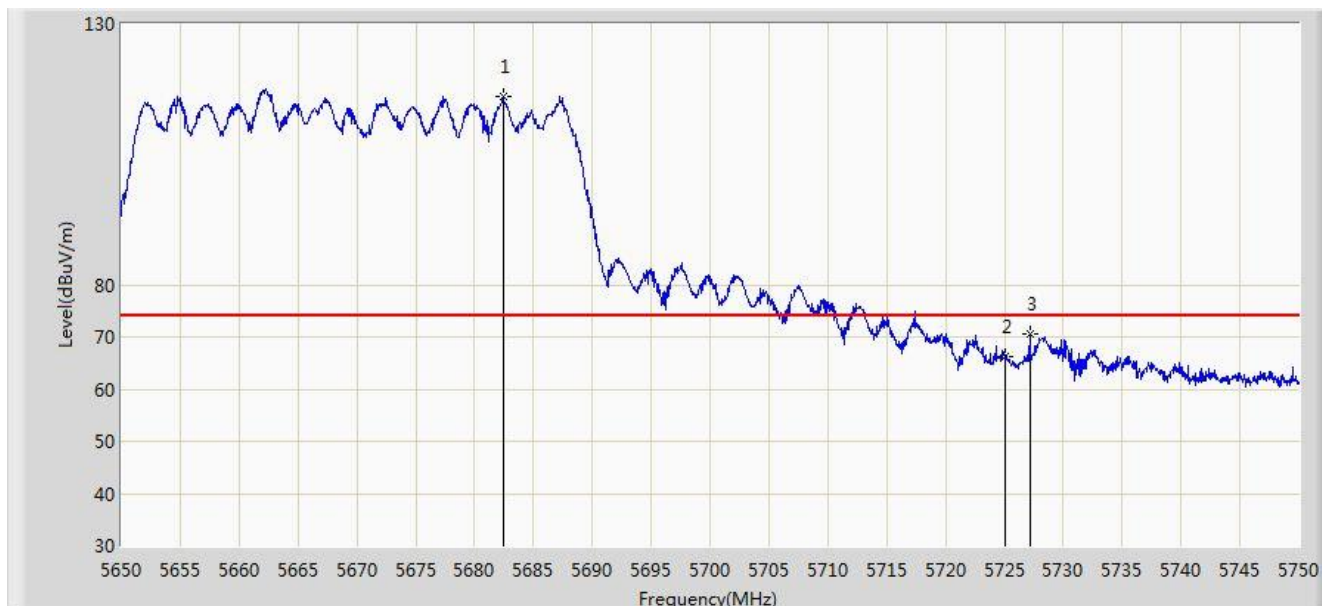


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5682.450	116.043	111.246	N/A	N/A	4.797	PK
2			5725.000	66.127	61.098	-7.873	74.000	5.029	PK
3			5727.150	70.693	65.650	-3.307	74.000	5.043	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/27 - 06:54
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11ax-HE40 at Channel 5670MHz	

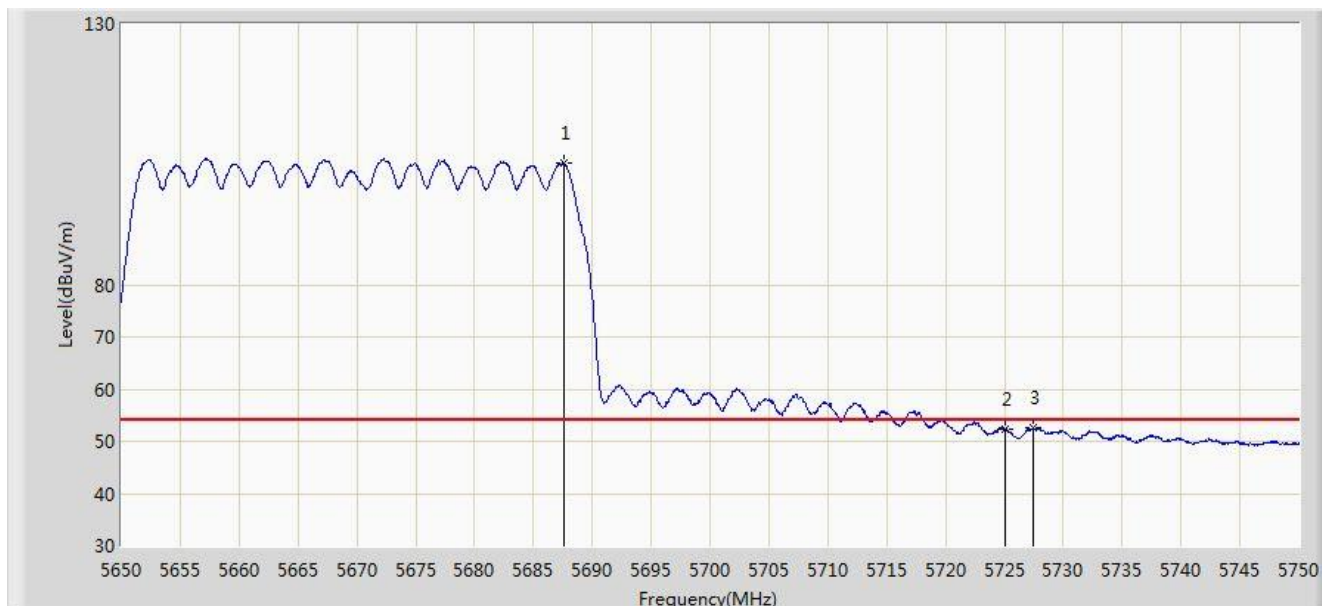


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5687.600	103.189	98.371	N/A	N/A	4.818	AV
2			5725.000	52.391	47.362	-1.609	54.000	5.029	AV
3			5727.500	52.520	47.475	-1.480	54.000	5.045	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/27 - 07:02
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11ax-HE40 at Channel 5755MHz	

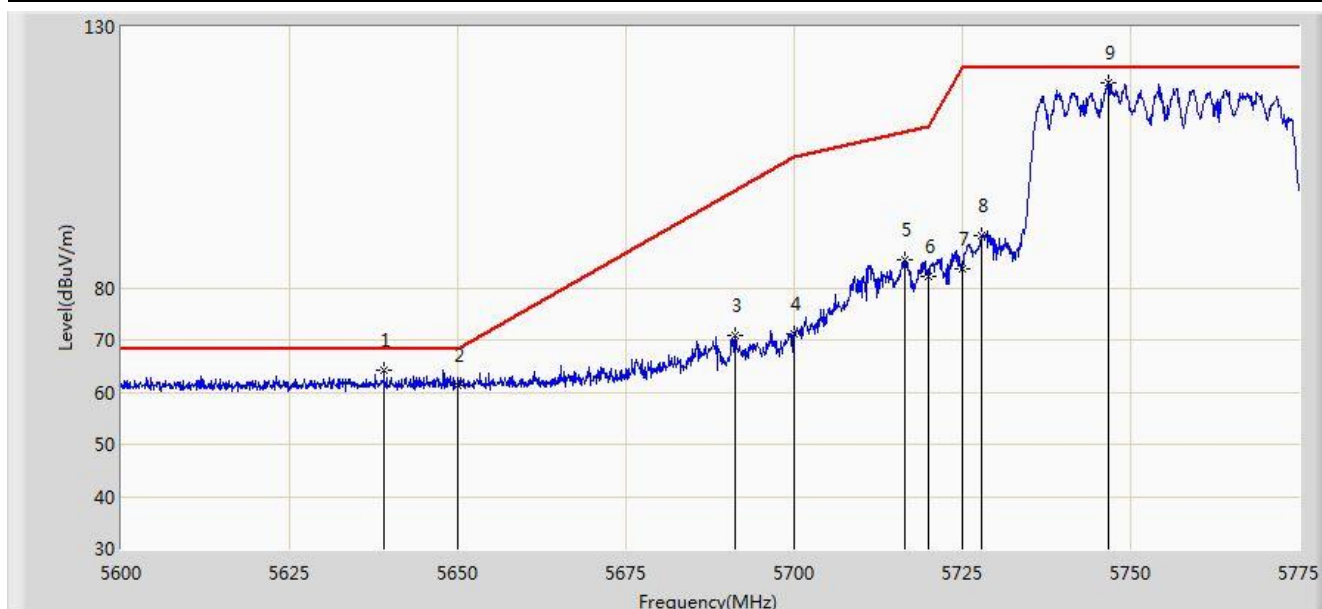


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5639.025	64.173	59.538	-4.027	68.200	4.635	PK
2			5650.000	61.385	56.714	-6.815	68.200	4.671	PK
3			5691.175	70.918	66.086	-27.775	98.693	4.833	PK
4			5700.000	71.115	66.237	-34.085	105.200	4.878	PK
5			5716.462	85.437	80.463	-24.374	109.811	4.975	PK
6			5720.000	82.194	77.197	-28.606	110.800	4.997	PK
7			5725.000	83.636	78.607	-38.564	122.200	5.029	PK
8			5727.837	89.911	84.864	-32.289	122.200	5.047	PK
9		*	5746.650	119.397	114.233	N/A	N/A	5.165	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/27 - 07:04
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11ax-HE40 at Channel 5755MHz	

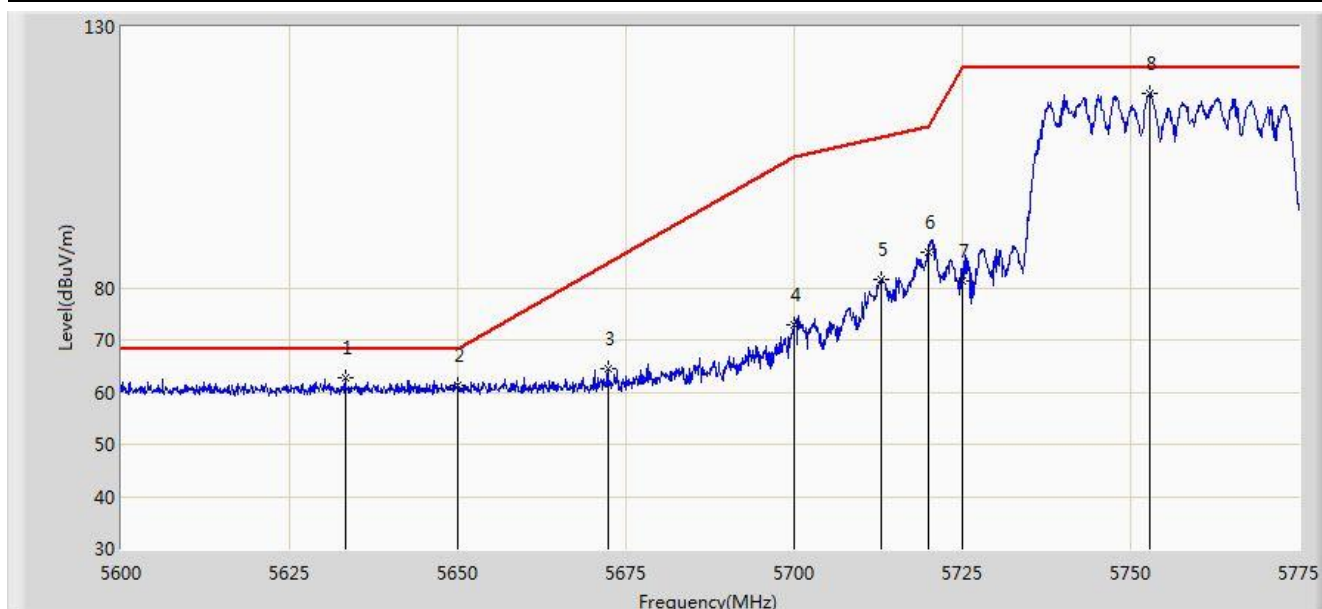


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5633.250	62.826	58.208	-5.374	68.200	4.618	PK
2			5650.000	61.293	56.622	-6.907	68.200	4.671	PK
3			5672.275	64.571	59.815	-20.153	84.724	4.757	PK
4			5700.000	72.803	67.925	-32.397	105.200	4.878	PK
5			5712.875	81.570	76.619	-27.237	108.807	4.952	PK
6			5720.000	86.854	81.857	-23.946	110.800	4.997	PK
7			5725.000	81.437	76.408	-40.763	122.200	5.029	PK
8		*	5752.950	117.373	112.173	N/A	N/A	5.200	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/27 - 07:05
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11ax-HE40 at Channel 5795MHz	

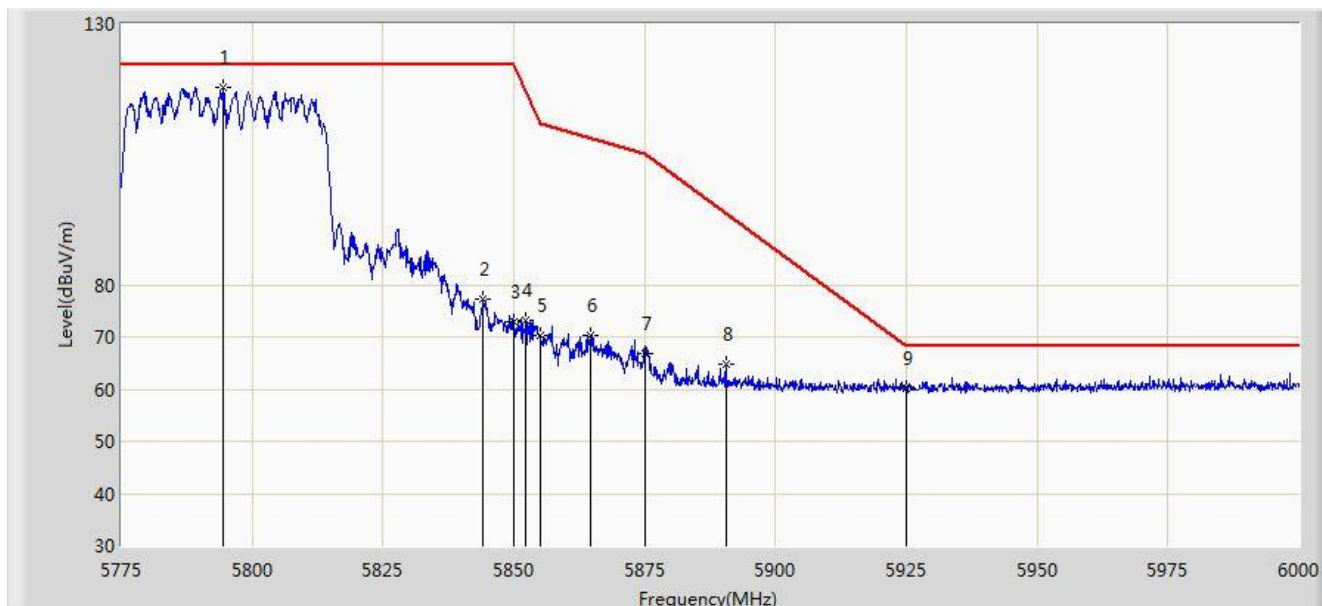


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5794.462	117.772	112.358	N/A	N/A	5.414	PK
2			5844.187	77.153	71.453	-45.047	122.200	5.700	PK
3			5850.000	72.768	67.042	-49.432	122.200	5.726	PK
4			5852.288	73.110	67.375	-43.872	116.982	5.735	PK
5			5855.000	70.397	64.651	-40.403	110.800	5.746	PK
6			5864.775	70.265	64.480	-37.796	108.061	5.785	PK
7			5875.000	66.809	60.989	-38.391	105.200	5.820	PK
8			5890.538	64.658	58.785	-29.010	93.668	5.874	PK
9			5925.000	60.048	54.082	-8.152	68.200	5.967	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/27 - 07:07
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11ax-HE40 at Channel 5795MHz	

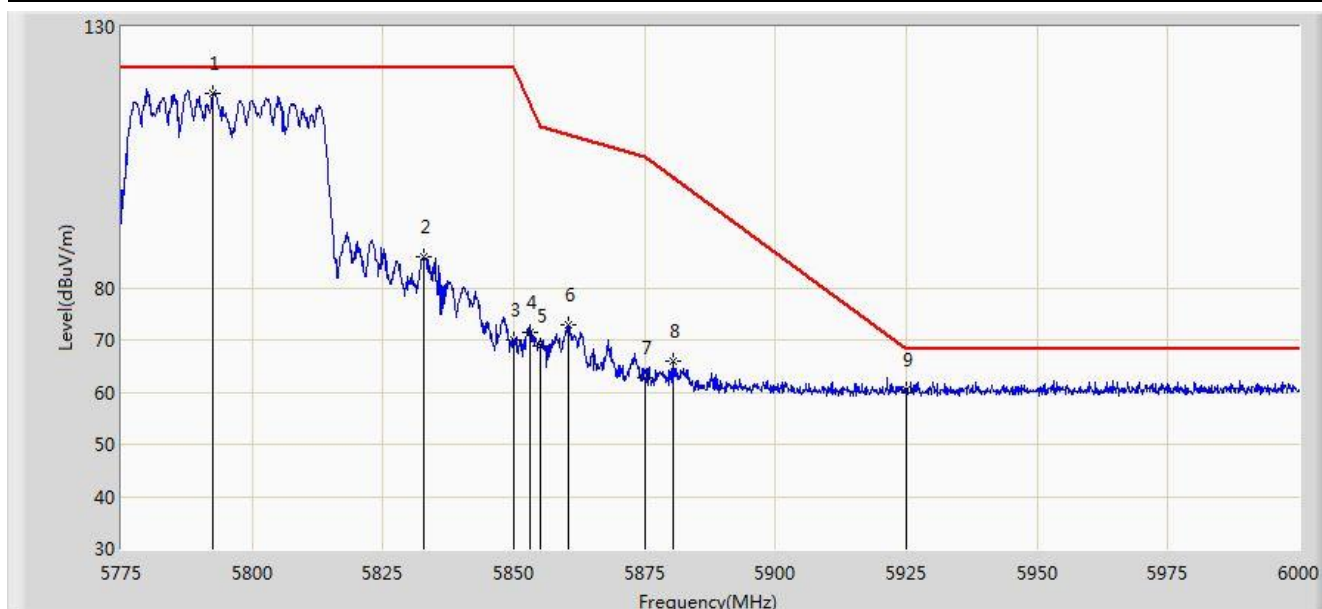


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5792.550	117.298	111.893	N/A	N/A	5.404	PK
2			5832.937	85.831	80.197	-36.369	122.200	5.635	PK
3			5850.000	69.875	64.149	-52.325	122.200	5.726	PK
4			5852.962	71.501	65.763	-43.945	115.445	5.738	PK
5			5855.000	68.909	63.163	-41.891	110.800	5.746	PK
6			5860.500	72.809	67.040	-36.449	109.258	5.769	PK
7			5875.000	62.635	56.815	-42.565	105.200	5.820	PK
8			5880.413	65.975	60.137	-35.204	101.179	5.838	PK
9			5925.000	60.458	54.492	-7.742	68.200	5.967	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/27 - 07:14
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11ax-HE80 at Channel 5210MHz	

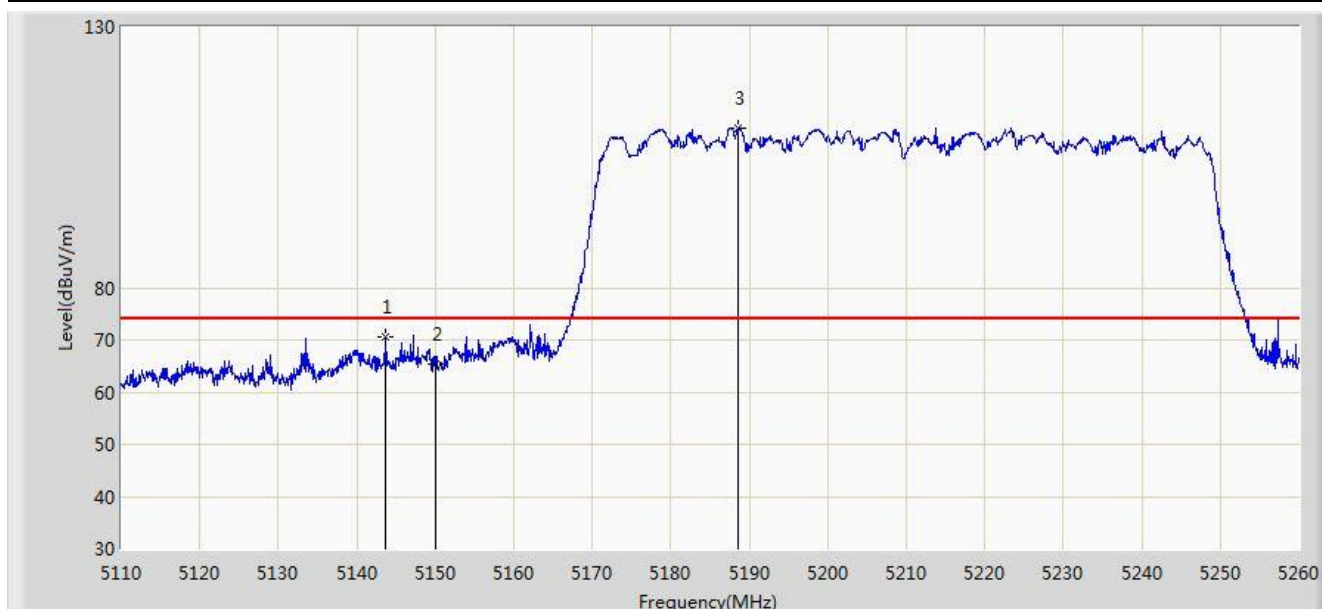


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5143.675	70.605	64.021	-3.395	74.000	6.584	PK
2			5150.000	65.410	58.848	-8.590	74.000	6.562	PK
3		*	5188.600	110.637	104.247	N/A	N/A	6.390	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/27 - 07:15
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11ax-HE80 at Channel 5210MHz	

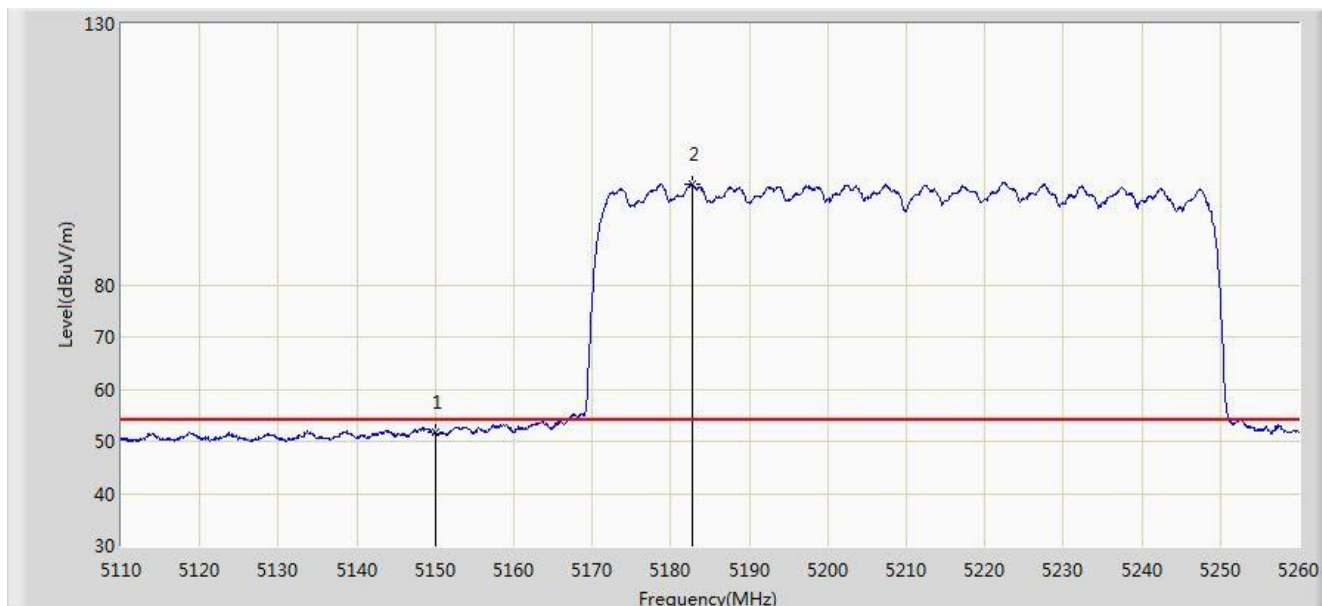


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	51.601	45.039	-2.399	54.000	6.562	AV
2		*	5182.675	99.202	92.778	N/A	N/A	6.424	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/27 - 07:12
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11ax-HE80 at Channel 5210MHz	

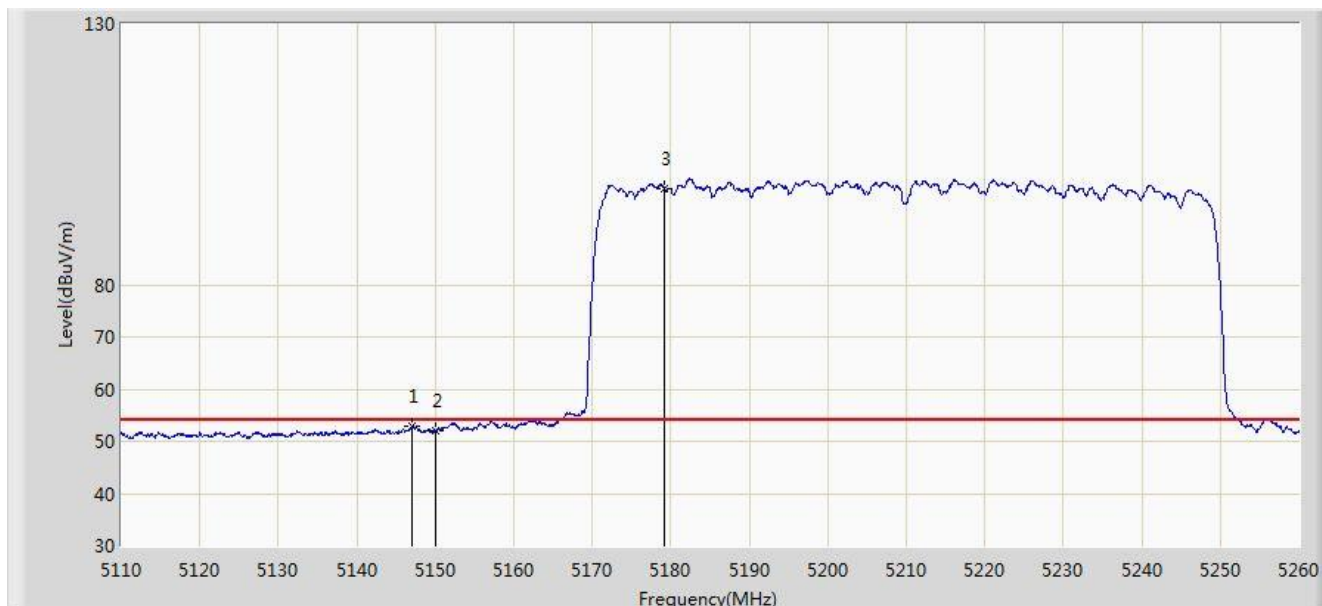


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5146.975	52.894	48.718	-1.106	54.000	4.176	AV
2			5150.000	52.083	47.914	-1.917	54.000	4.170	AV
3		*	5179.225	98.346	94.274	N/A	N/A	4.071	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/27 - 07:13
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11ax-HE80 at Channel 5210MHz	

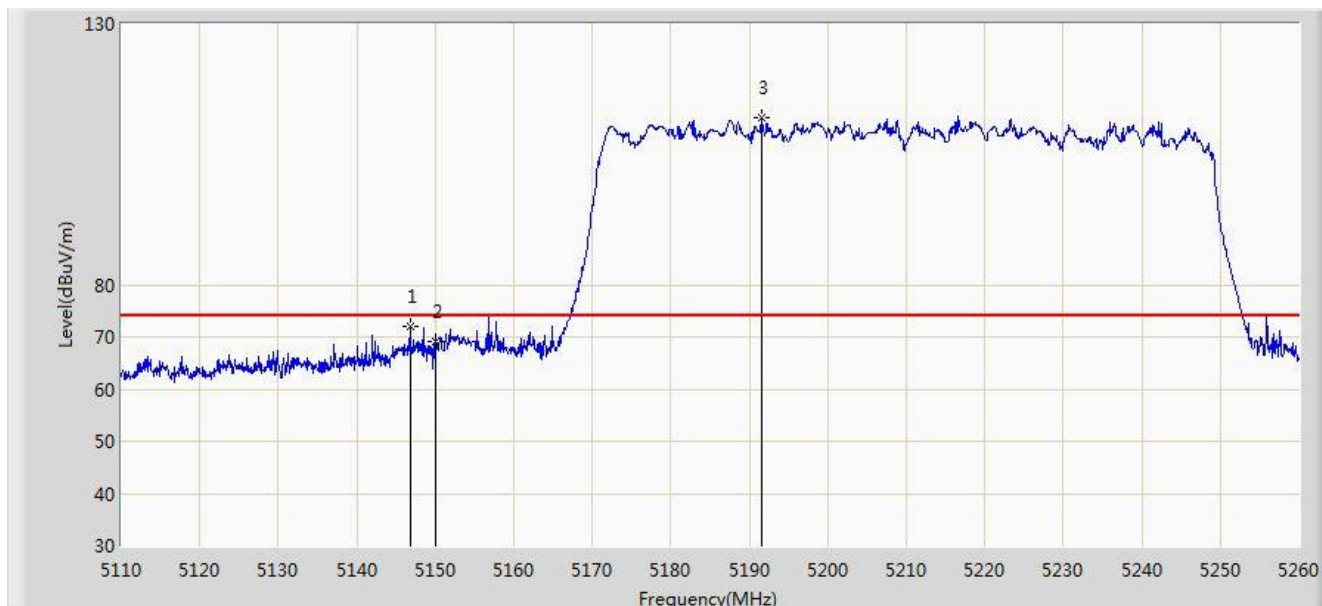


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5146.750	71.917	67.741	-2.083	74.000	4.176	PK
2			5150.000	69.021	64.852	-4.979	74.000	4.170	PK
3		*	5191.525	111.962	107.934	N/A	N/A	4.028	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/27 - 07:28
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11ax-HE80 at Channel 5290MHz	

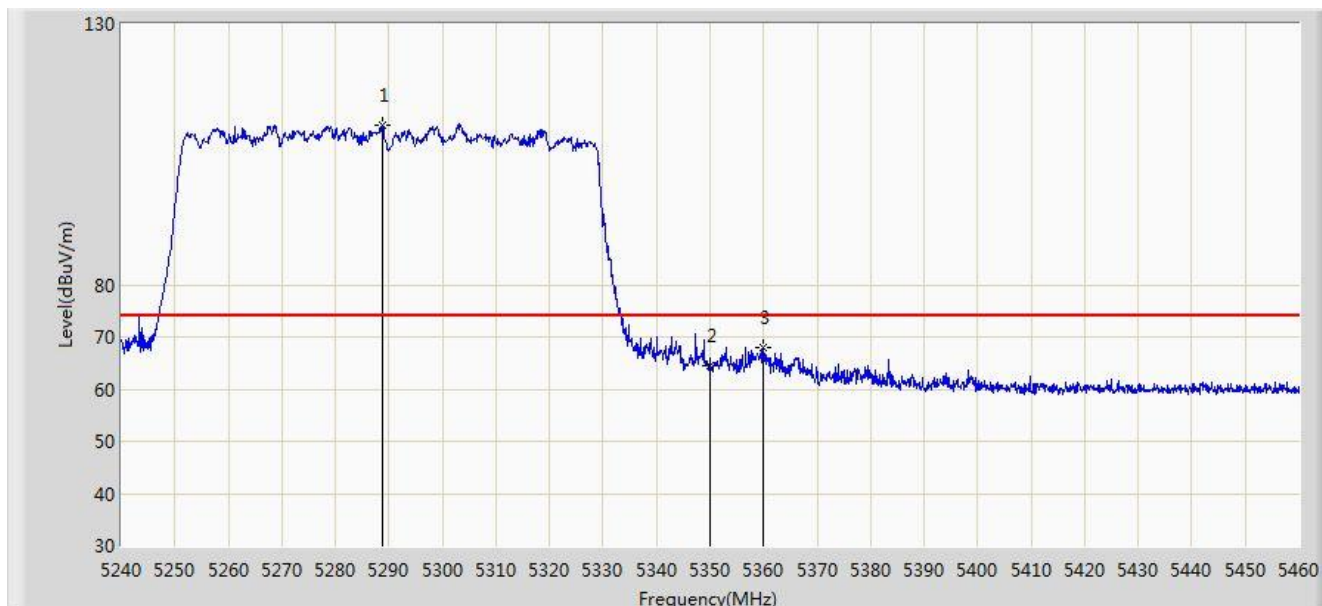


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5288.730	110.609	106.788	N/A	N/A	3.820	PK
2			5350.000	64.572	60.667	-9.428	74.000	3.904	PK
3			5359.790	67.951	64.029	-6.049	74.000	3.922	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/27 - 07:29
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11ax-HE80 at Channel 5290MHz	

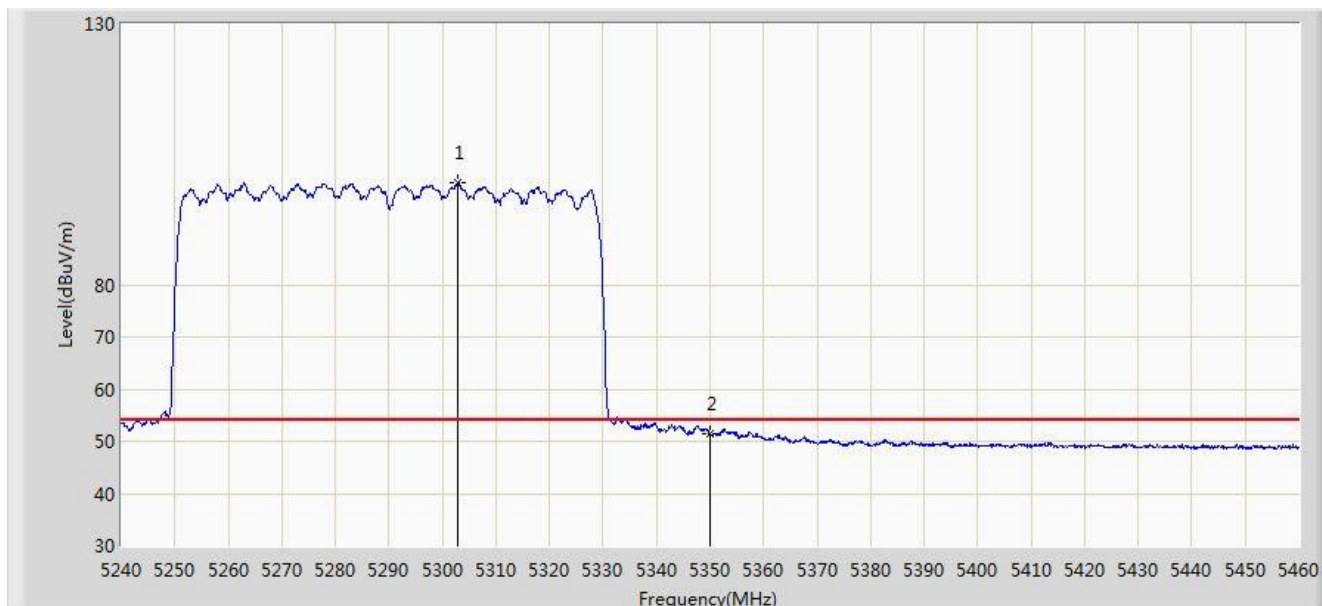


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5302.810	99.494	95.678	N/A	N/A	3.816	AV
2			5350.000	51.415	47.510	-2.585	54.000	3.904	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/27 - 07:25
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11ax-HE80 at Channel 5290MHz	

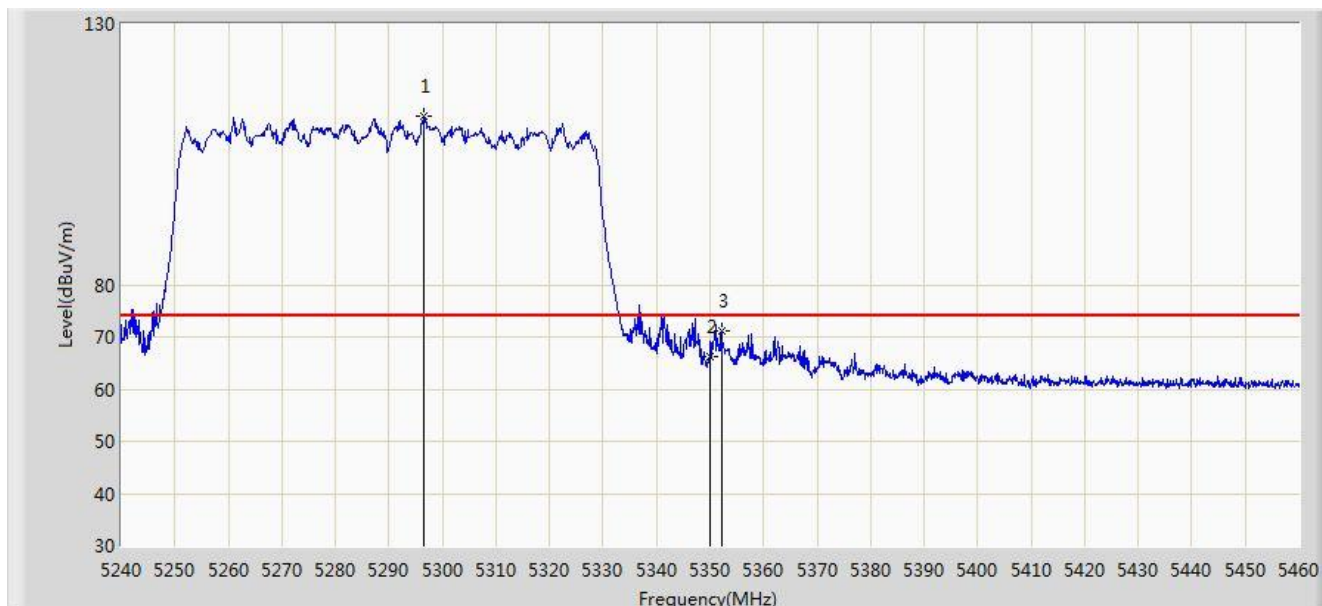


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5296.430	112.414	108.598	N/A	N/A	3.816	PK
2			5350.000	66.164	62.259	-7.836	74.000	3.904	PK
3			5352.090	71.016	67.107	-2.984	74.000	3.908	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/27 - 07:22
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11ax-HE80 at Channel 5290MHz	

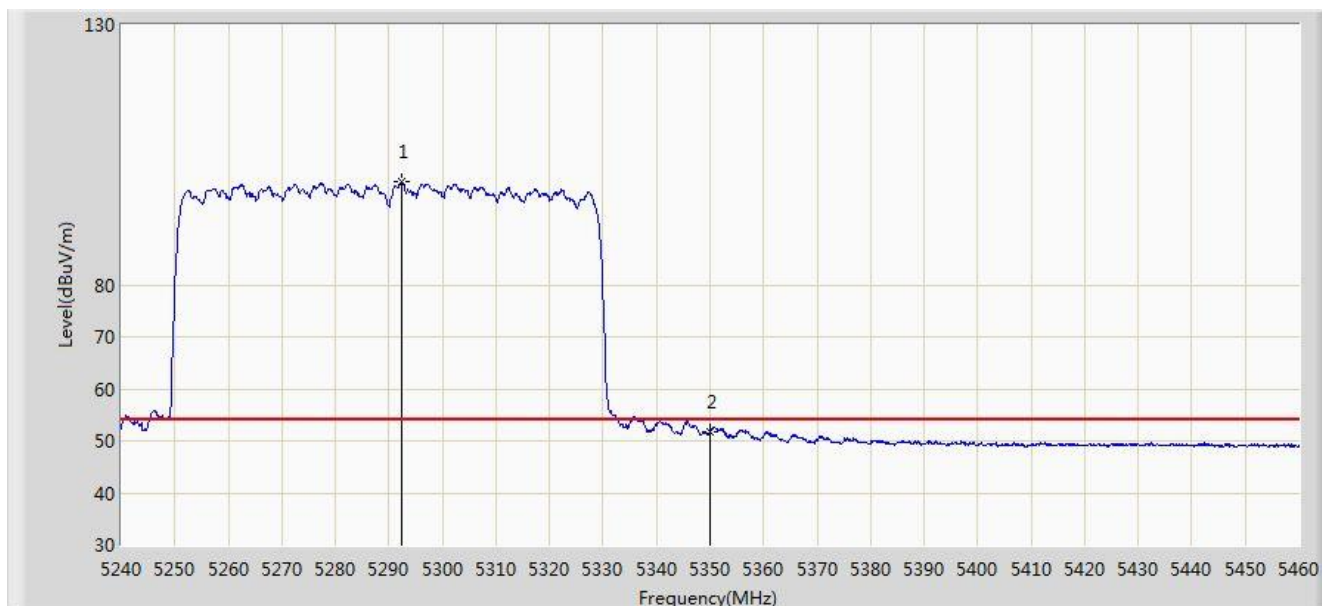


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5292.250	99.739	95.920	N/A	N/A	3.819	AV
2			5350.000	51.814	47.909	-2.186	54.000	3.904	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/27 - 07:37
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11ax-HE80 at Channel 5530MHz	

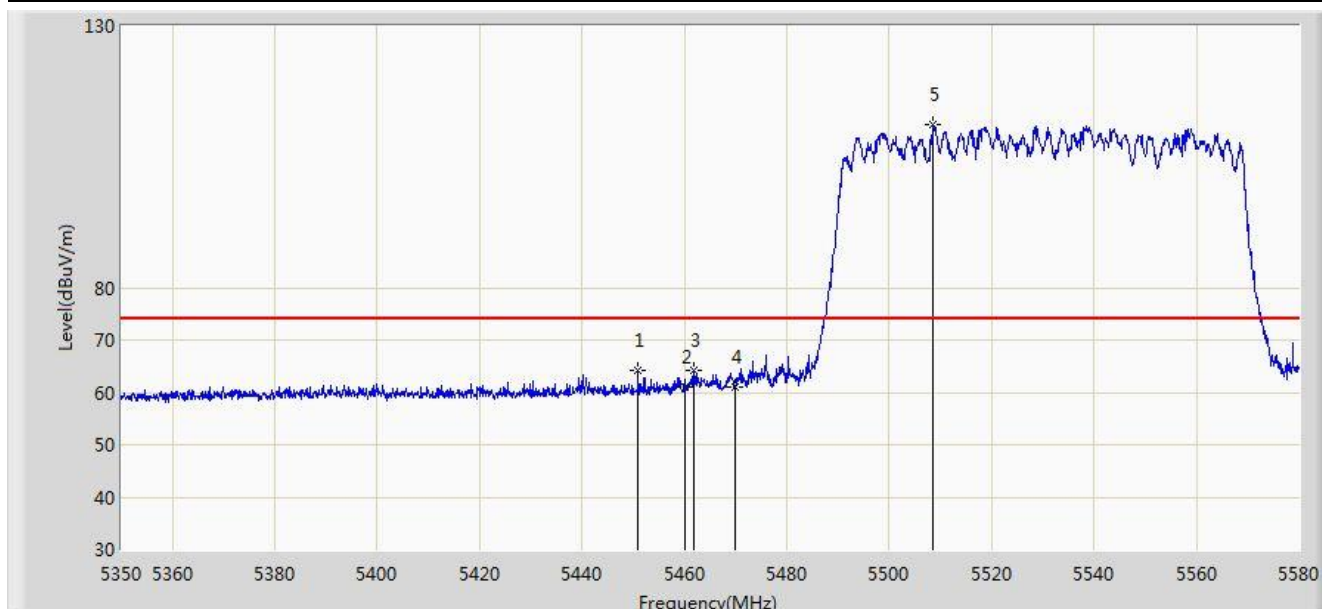


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5450.970	64.137	59.979	-9.863	74.000	4.158	PK
2			5460.000	61.011	56.831	-12.989	74.000	4.180	PK
3			5461.780	64.104	59.920	-4.096	68.200	4.184	PK
4			5470.000	61.125	56.923	-7.075	68.200	4.202	PK
5		*	5508.585	111.123	106.826	N/A	N/A	4.297	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/27 - 07:38
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11ax-HE80 at Channel 5530MHz	

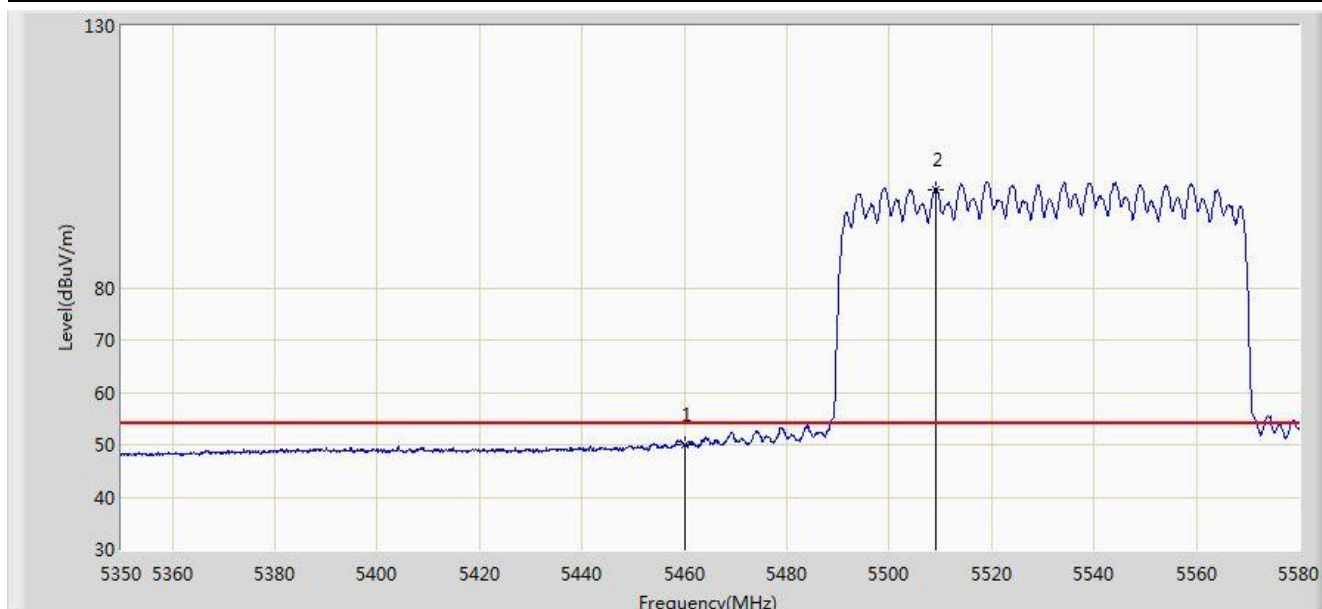


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	49.864	45.684	-4.136	54.000	4.180	AV
2		*	5509.045	98.811	94.513	N/A	N/A	4.299	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/27 - 07:35
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11ax-HE80 at Channel 5530MHz	

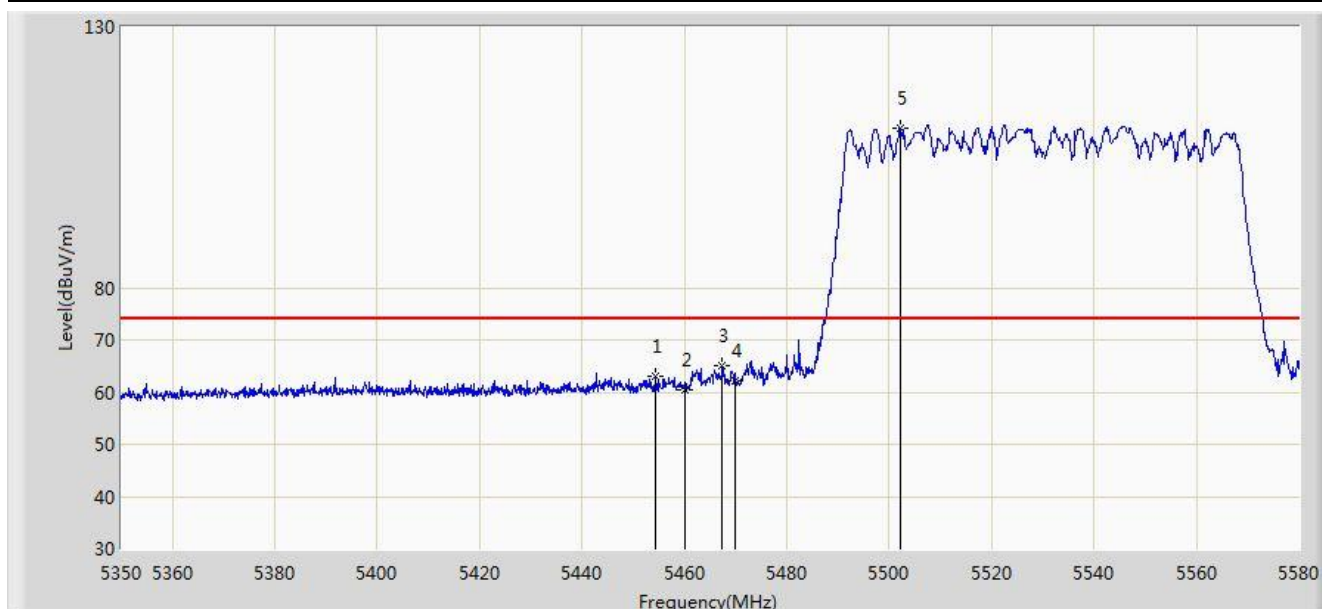


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5454.420	63.160	58.992	-10.840	74.000	4.168	PK
2			5460.000	60.505	56.325	-13.495	74.000	4.180	PK
3			5467.415	65.064	60.867	-3.136	68.200	4.196	PK
4			5470.000	62.169	57.967	-6.031	68.200	4.202	PK
5		*	5502.145	110.689	106.411	N/A	N/A	4.278	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/27 - 07:36
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11ax-HE80 at Channel 5530MHz	

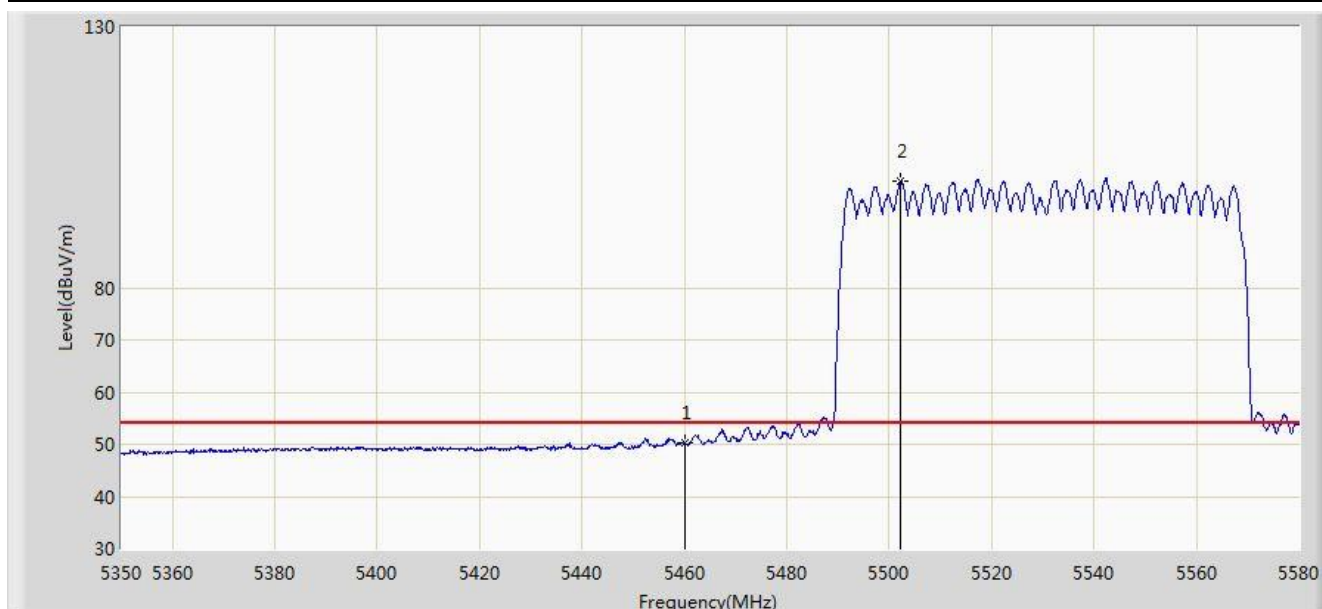


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	50.335	46.155	-3.665	54.000	4.180	AV
2		*	5502.260	100.389	96.110	N/A	N/A	4.278	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/27 - 07:46
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11ax-HE80 at Channel 5610MHz	

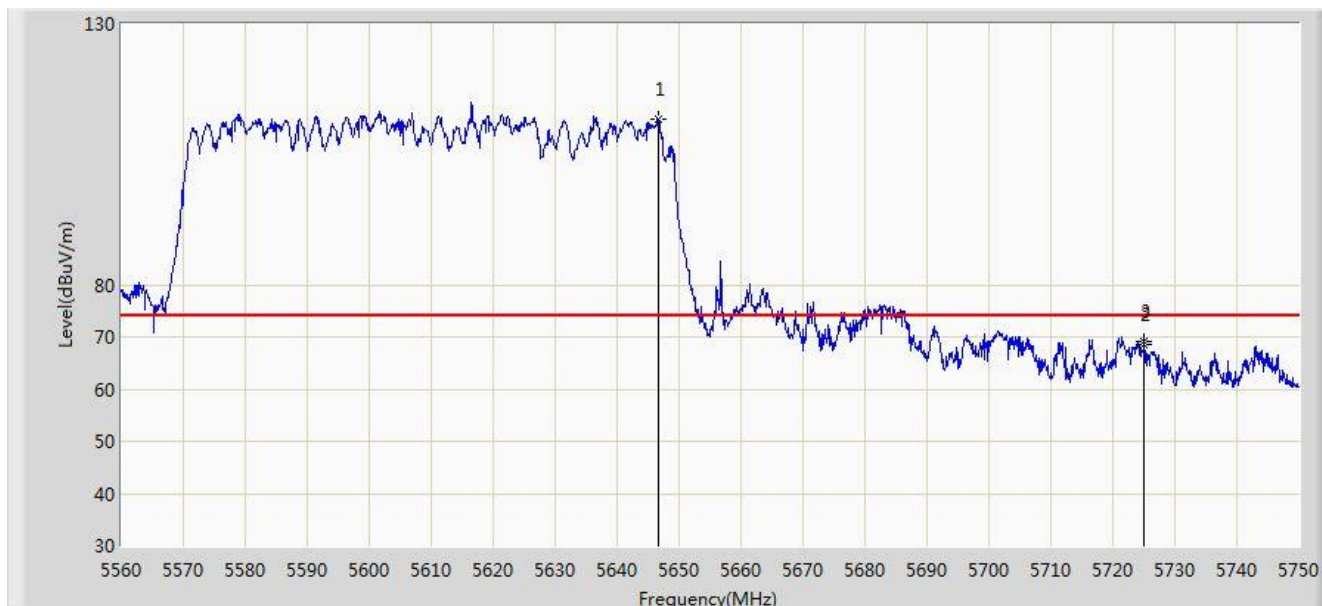


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5646.735	111.750	107.090	N/A	N/A	4.660	PK
2			5725.000	68.682	63.653	-5.318	74.000	5.029	PK
3			5725.015	68.995	63.966	-5.005	74.000	5.029	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/27 - 07:47
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11ax-HE80 at Channel 5610MHz	

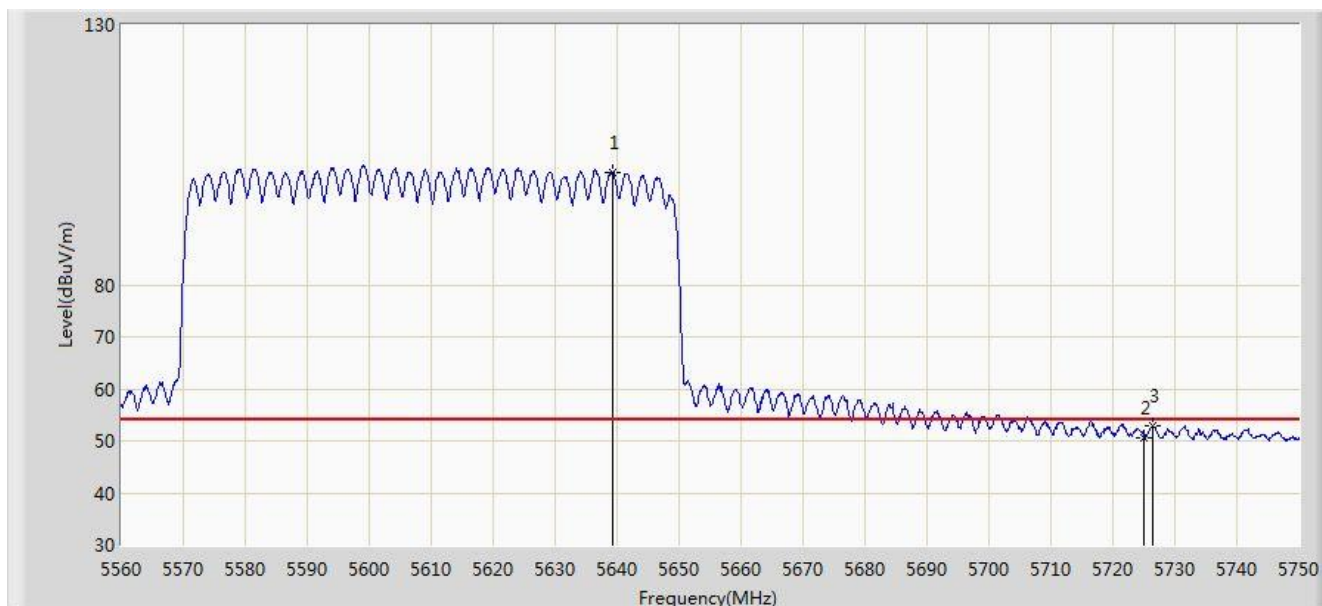


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5639.230	101.670	97.034	N/A	N/A	4.635	AV
2			5725.000	50.647	45.618	-3.353	54.000	5.029	AV
3			5726.535	53.003	47.964	-0.997	54.000	5.039	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/27 - 07:45
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11ax-HE80 at Channel 5610MHz	

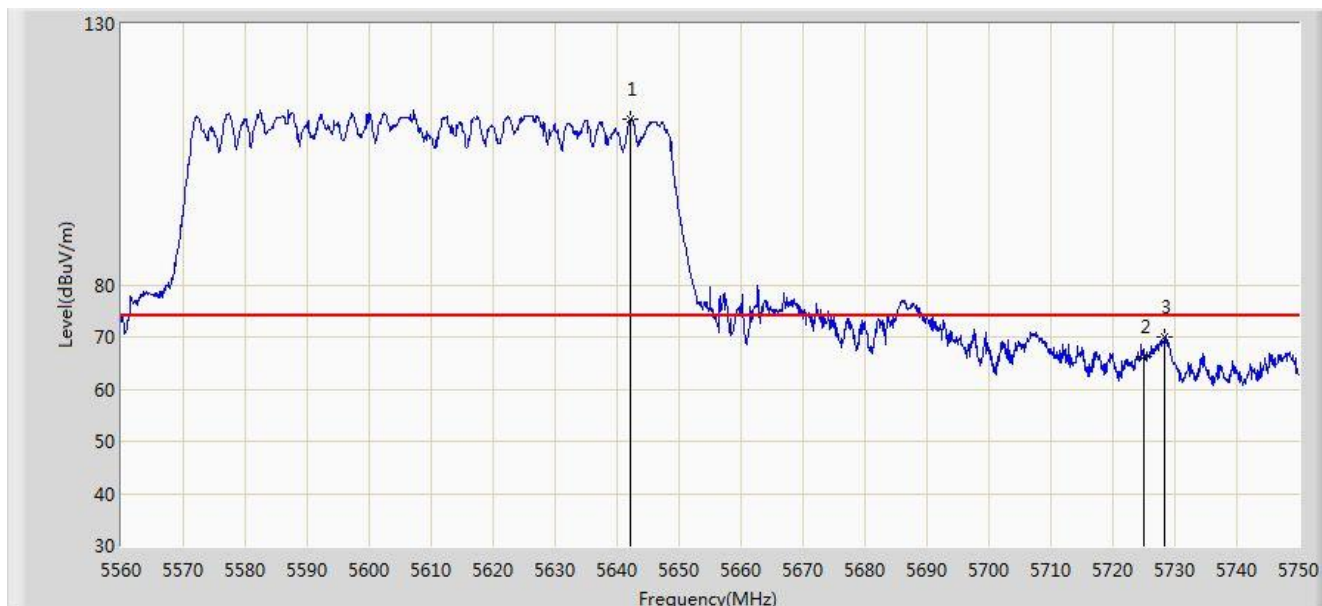


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5642.080	111.880	107.235	N/A	N/A	4.644	PK
2			5725.000	66.294	61.265	-7.706	74.000	5.029	PK
3			5728.435	69.975	64.924	-4.025	74.000	5.051	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/27 - 07:44
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11ax-HE80 at Channel 5610MHz	

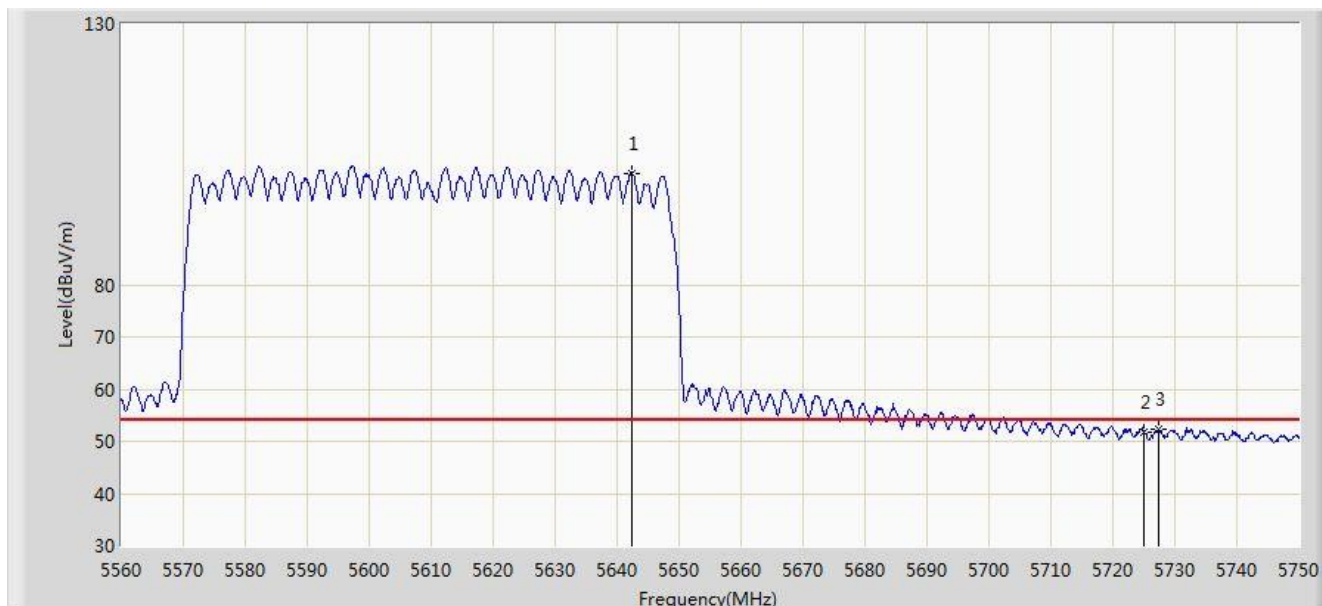


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5642.270	101.432	96.787	N/A	N/A	4.646	AV
2			5725.000	51.783	46.754	-2.217	54.000	5.029	AV
3			5727.295	52.240	47.196	-1.760	54.000	5.044	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/27 - 07:53
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11ax-HE80 at Channel 5775MHz	

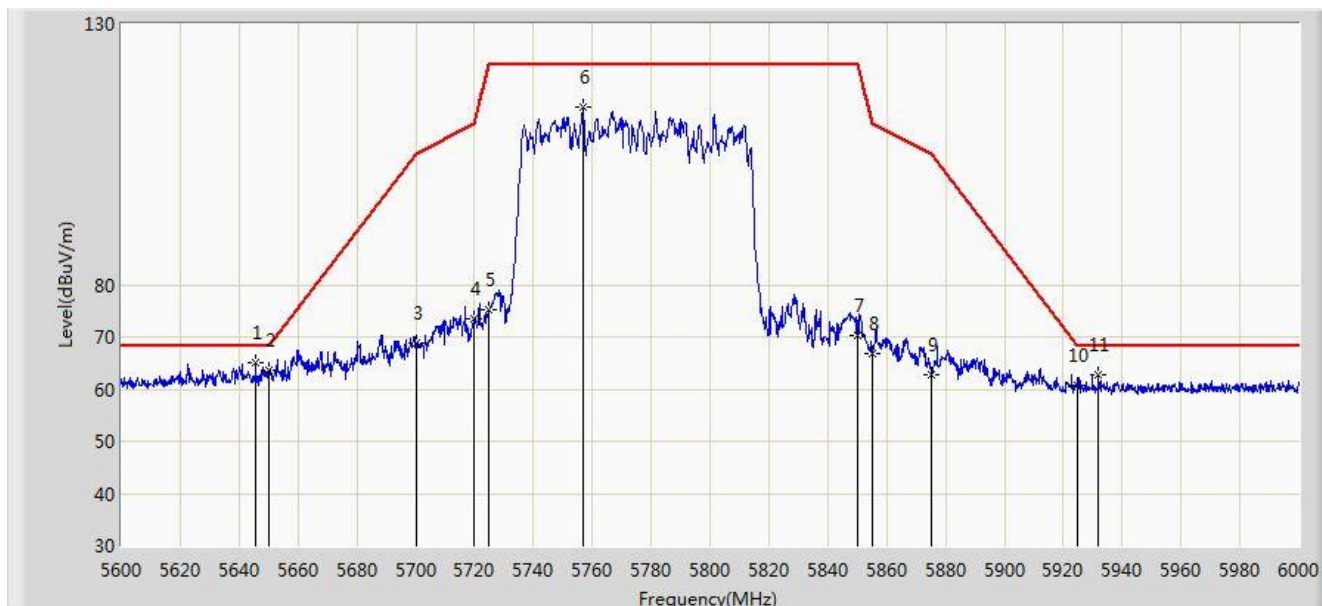


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5645.600	65.101	60.445	-3.099	68.200	4.657	PK
2			5650.000	63.765	59.094	-4.435	68.200	4.671	PK
3			5700.000	68.748	63.870	-36.452	105.200	4.878	PK
4			5720.000	73.405	68.408	-37.395	110.800	4.997	PK
5			5725.000	75.355	70.326	-46.845	122.200	5.029	PK
6			5756.800	114.201	108.979	N/A	N/A	5.222	PK
7			5850.000	70.414	64.688	-51.786	122.200	5.726	PK
8			5855.000	66.742	60.996	-44.058	110.800	5.746	PK
9			5875.000	62.833	57.013	-42.367	105.200	5.820	PK
10			5925.000	60.756	54.790	-7.444	68.200	5.967	PK
11			5932.000	62.850	56.866	-5.350	68.200	5.984	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/27 - 07:54
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11ax-HE80 at Channel 5775MHz	

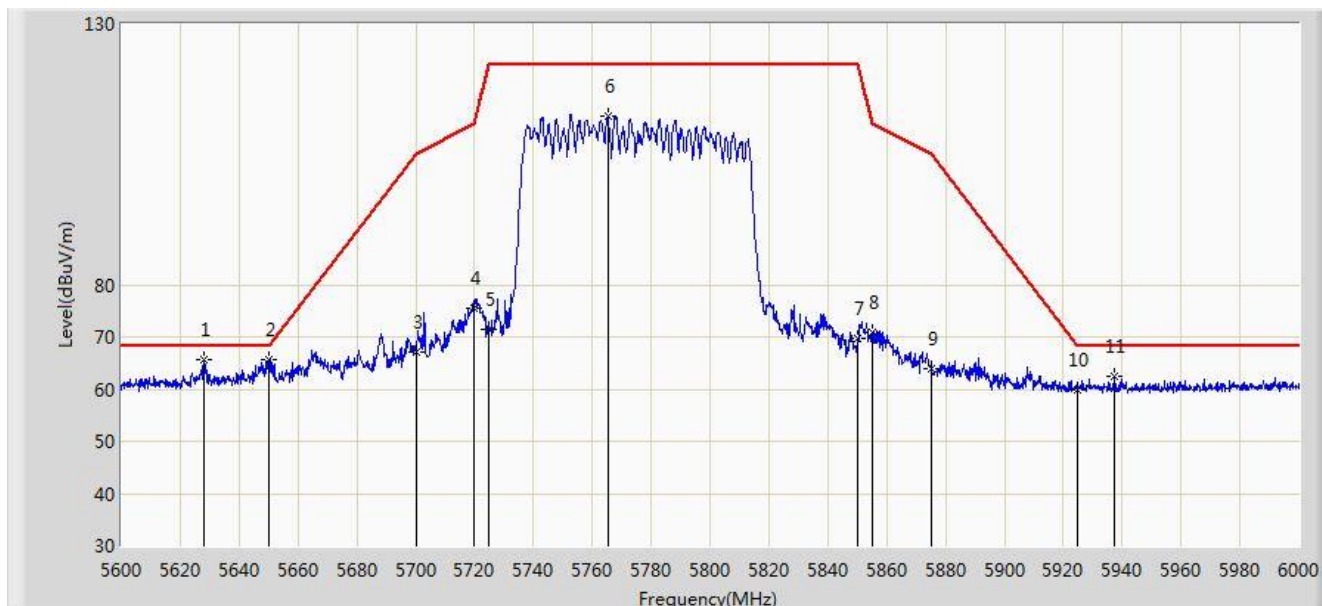


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5628.000	65.684	61.081	-2.516	68.200	4.604	PK
2			5650.000	65.664	60.993	-2.536	68.200	4.671	PK
3			5700.000	66.980	62.102	-38.220	105.200	4.878	PK
4			5720.000	75.396	70.399	-35.404	110.800	4.997	PK
5			5725.000	71.319	66.290	-50.881	122.200	5.029	PK
6			5765.200	112.233	106.967	N/A	N/A	5.267	PK
7			5850.000	69.764	64.038	-52.436	122.200	5.726	PK
8			5855.000	70.923	65.177	-39.877	110.800	5.746	PK
9			5875.000	63.837	58.017	-41.363	105.200	5.820	PK
10			5925.000	59.896	53.930	-8.304	68.200	5.967	PK
11			5937.400	62.321	56.324	-5.879	68.200	5.997	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/27 - 07:58
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11ax-HE160 at Channel 5250MHz	

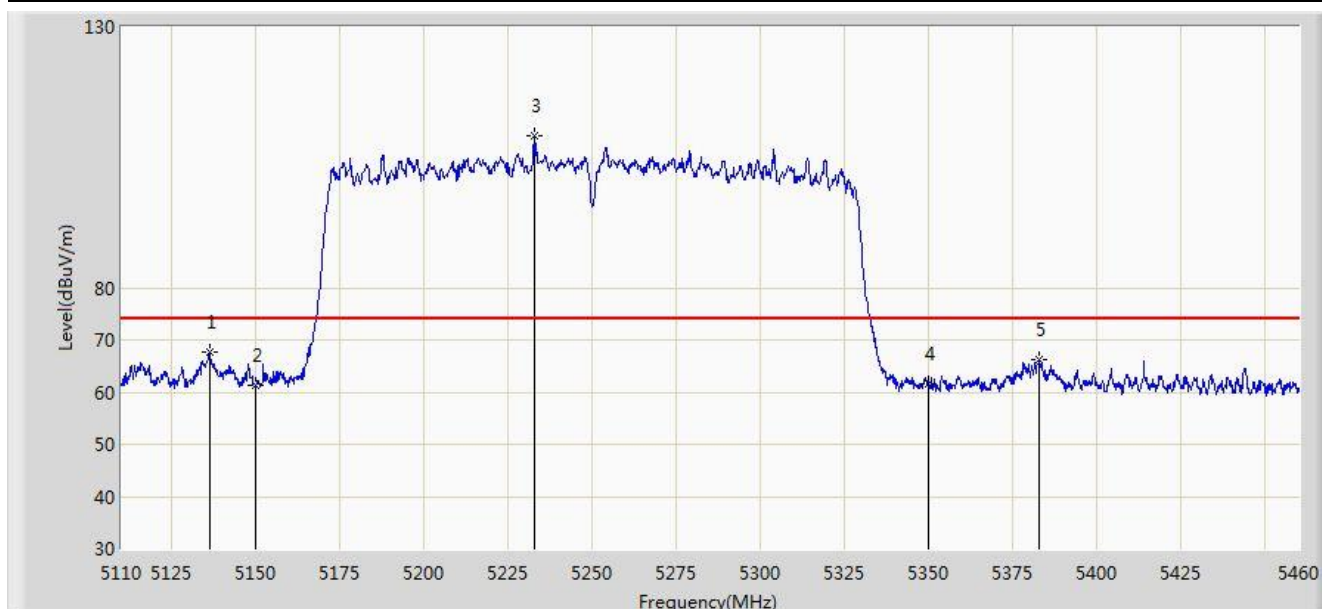


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5136.250	67.631	63.456	-6.369	74.000	4.175	PK
2			5150.000	61.187	57.018	-12.813	74.000	4.170	PK
3		*	5233.025	109.066	105.166	N/A	N/A	3.901	PK
4			5350.000	61.505	57.600	-12.495	74.000	3.904	PK
5			5383.000	66.117	62.152	-7.883	74.000	3.966	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/27 - 07:59
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11ax-HE160 at Channel 5250MHz	

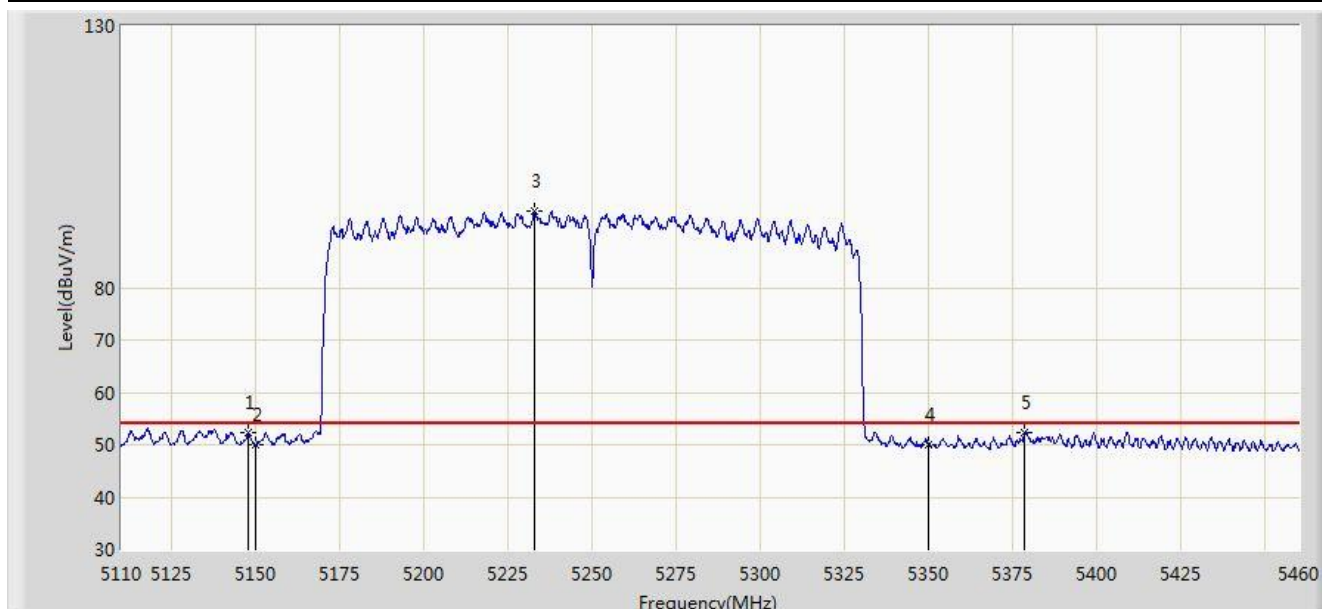


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5147.625	52.245	48.069	-1.755	54.000	4.176	AV
2			5150.000	49.914	45.745	-4.086	54.000	4.170	AV
3		*	5232.850	94.524	90.623	N/A	N/A	3.901	AV
4			5350.000	50.067	46.162	-3.933	54.000	3.904	AV
5			5378.625	52.247	48.290	-1.753	54.000	3.957	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/27 - 07:56
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11ax-HE160 at Channel 5250MHz	

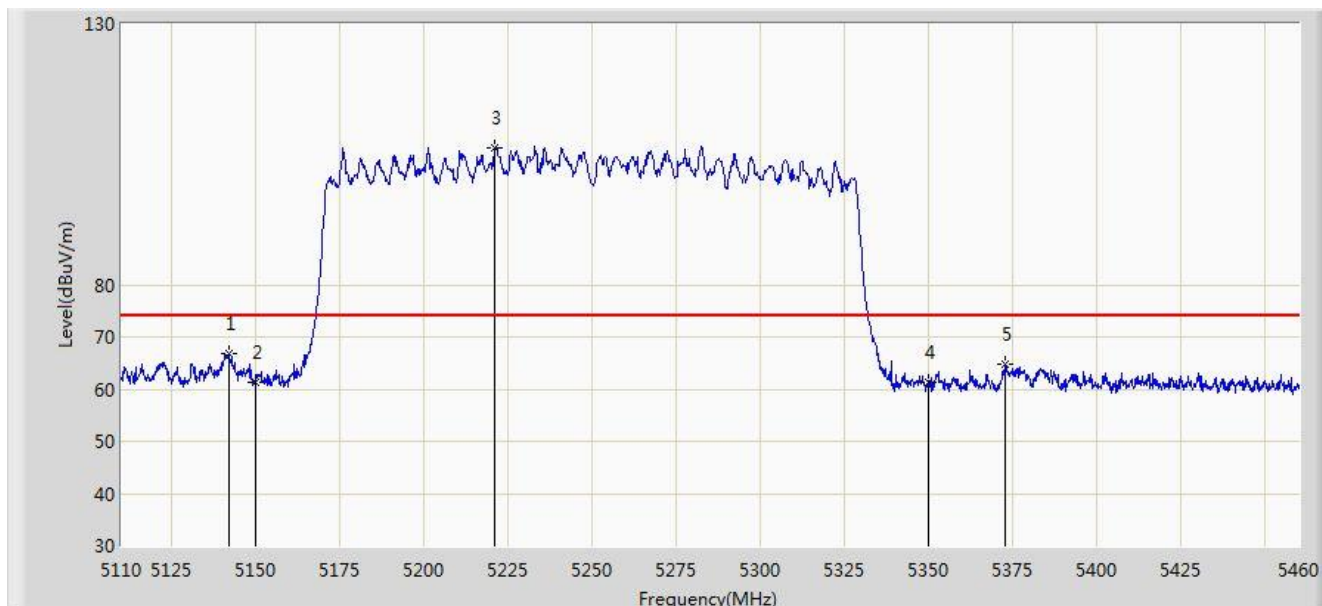


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5141.850	66.918	62.742	-7.082	74.000	4.176	PK
2			5150.000	61.397	57.228	-12.603	74.000	4.170	PK
3		*	5221.125	106.355	102.419	N/A	N/A	3.936	PK
4			5350.000	61.338	57.433	-12.662	74.000	3.904	PK
5			5372.850	64.835	60.889	-9.165	74.000	3.946	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/27 - 07:57
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11ax-HE160 at Channel 5250MHz	

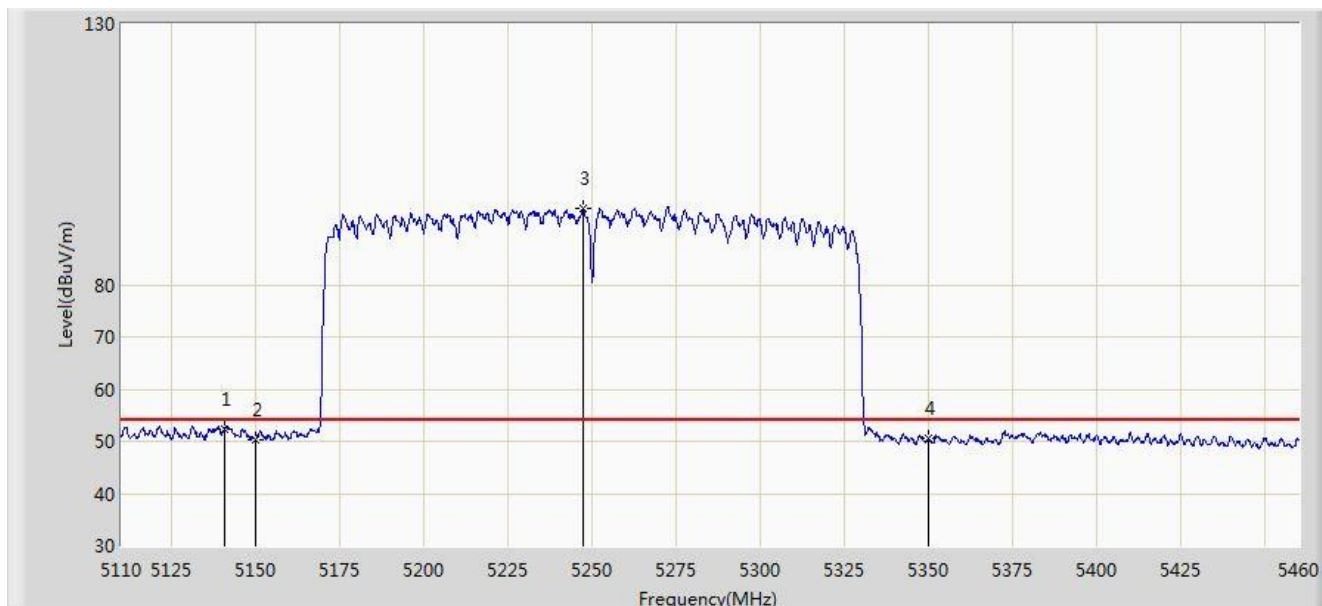


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5140.800	52.403	48.227	-1.597	54.000	4.176	AV
2			5150.000	50.345	46.176	-3.655	54.000	4.170	AV
3		*	5247.200	94.583	90.724	N/A	N/A	3.859	AV
4			5350.000	50.469	46.564	-3.531	54.000	3.904	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/27 - 08:03
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11ax-HE160 at Channel 5570MHz	

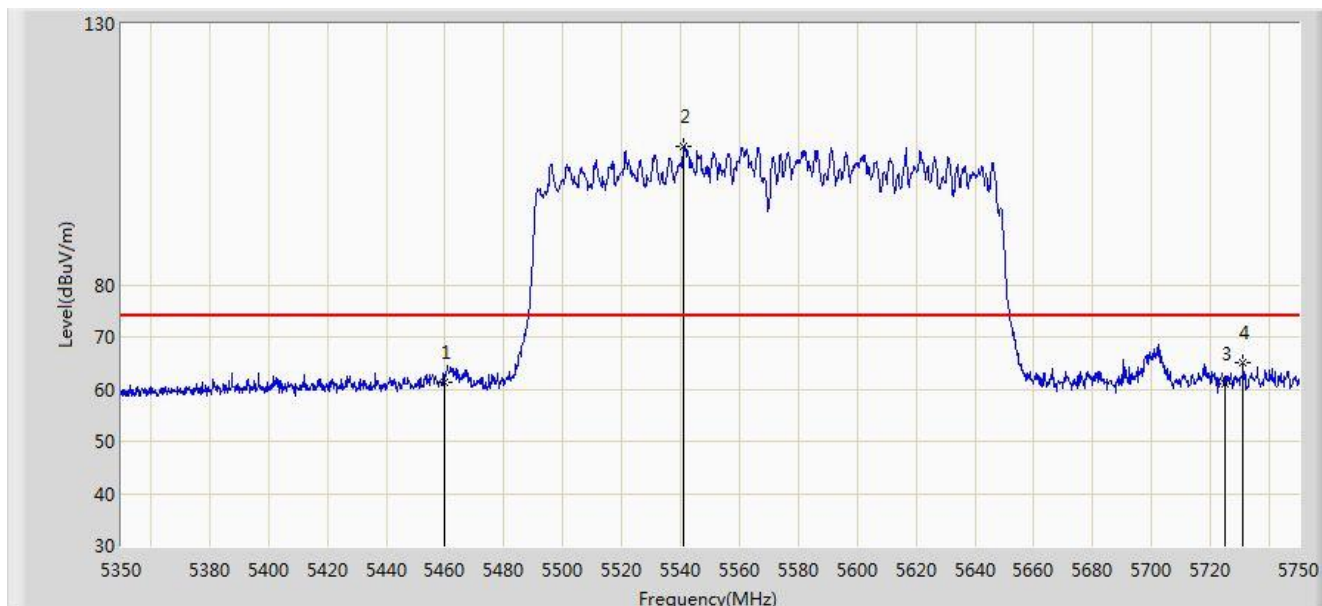


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	61.376	57.196	-12.624	74.000	4.180	PK
2		*	5541.200	106.561	102.167	N/A	N/A	4.394	PK
3			5725.000	61.106	56.077	-12.894	74.000	5.029	PK
4			5731.200	65.165	60.096	-8.835	74.000	5.069	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/27 - 08:04
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11ax-HE160 at Channel 5570MHz	

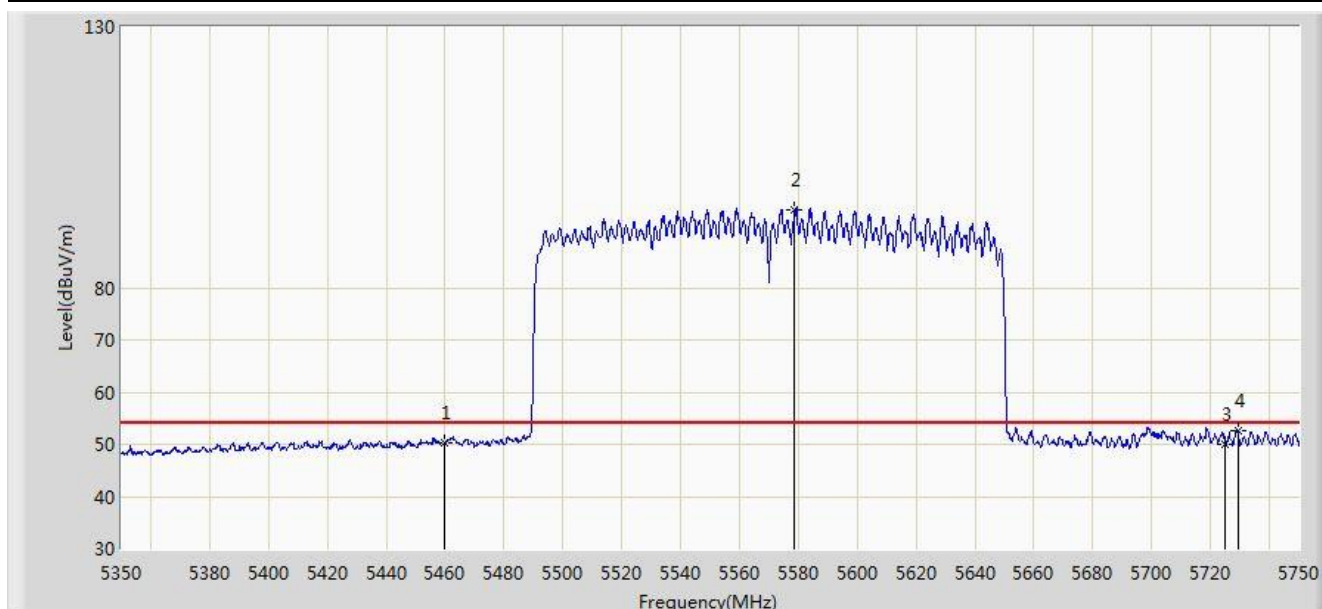


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	50.198	46.018	-3.802	54.000	4.180	AV
2		*	5578.800	94.816	90.336	N/A	N/A	4.480	AV
3			5725.000	50.018	44.989	-3.982	54.000	5.029	AV
4			5729.200	52.536	47.480	-1.464	54.000	5.055	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/27 - 08:01
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11ax-HE160 at Channel 5570MHz	

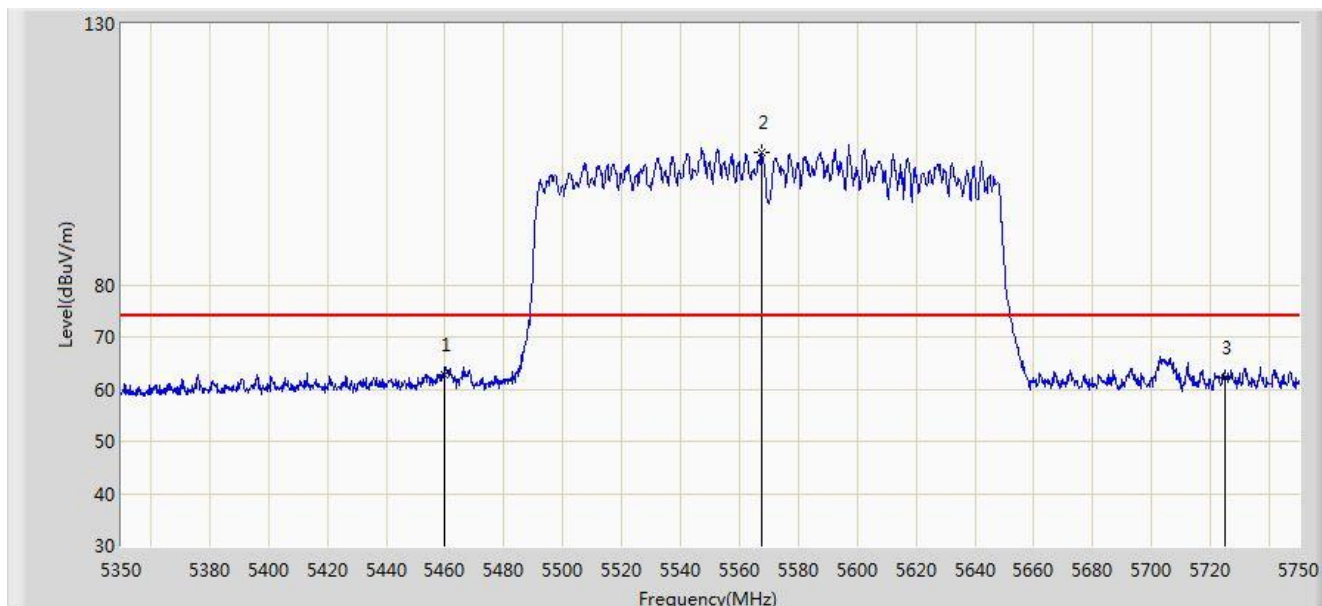


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	62.679	58.499	-11.321	74.000	4.180	PK
2		*	5567.400	105.449	100.992	N/A	N/A	4.456	PK
3			5725.000	62.147	57.118	-11.853	74.000	5.029	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/27 - 08:02
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11ax-HE160 at Channel 5570MHz	

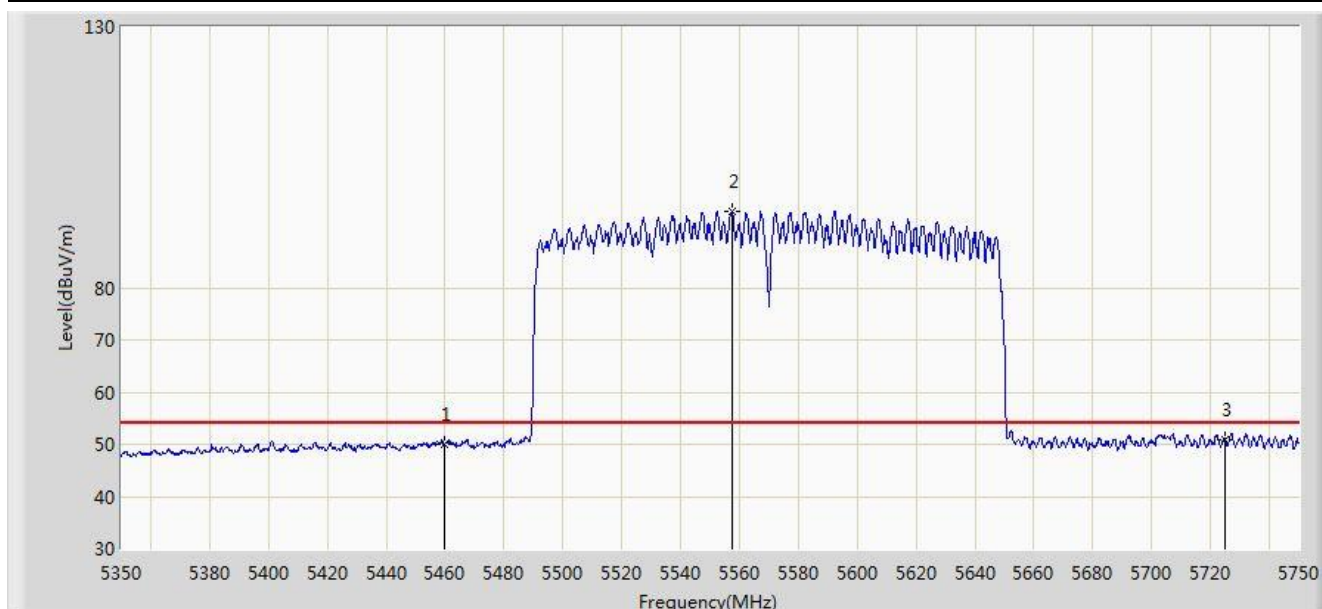


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	49.890	45.710	-4.110	54.000	4.180	AV
2		*	5557.400	94.516	90.079	N/A	N/A	4.437	AV
3			5725.000	50.782	45.753	-3.218	54.000	5.029	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

For APIN0515:

Site: AC1	Time: 2018/06/20 - 01:02
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11a at Channel 5180MHz	

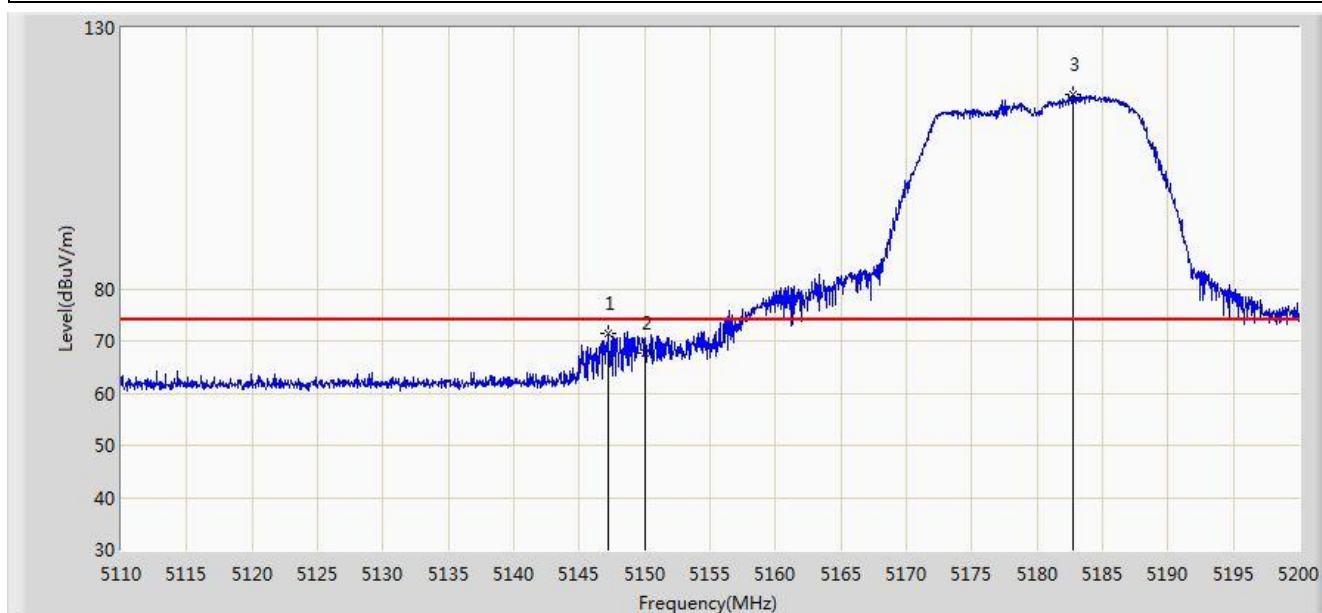


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5147.260	71.517	67.341	-2.483	74.000	4.176	PK
2			5150.000	67.743	63.574	-6.257	74.000	4.170	PK
3		*	5182.720	117.172	113.113	N/A	N/A	4.060	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/20 - 01:05
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11a at Channel 5180MHz	

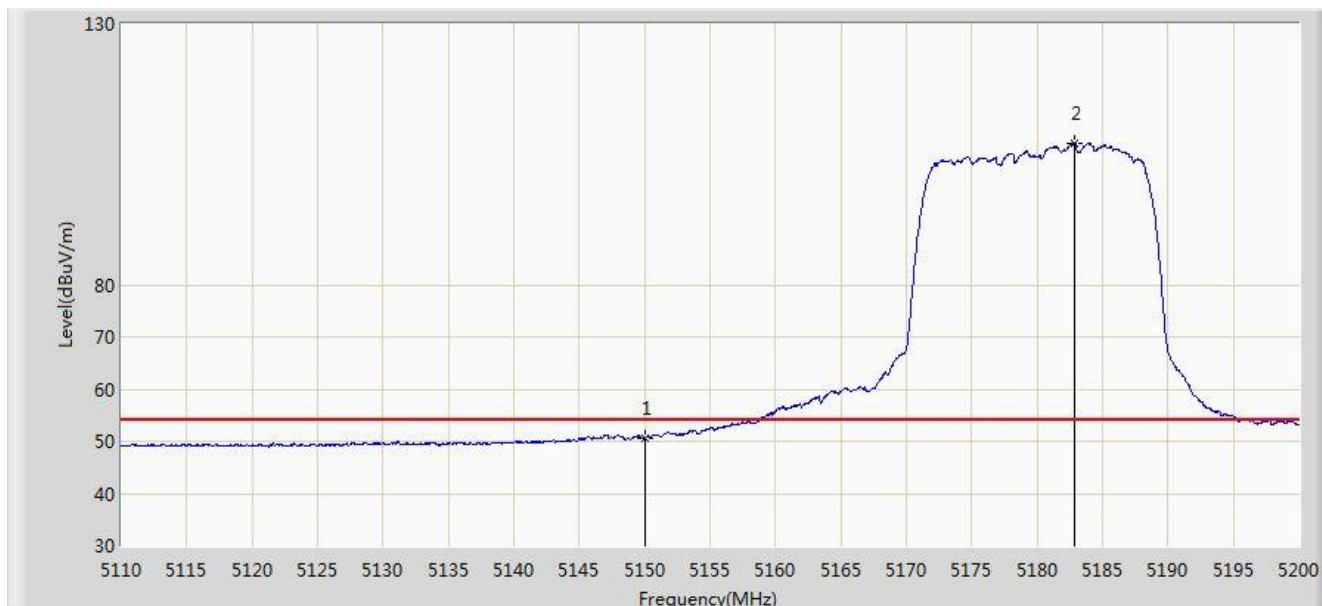


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	50.569	46.400	-3.431	54.000	4.170	AV
2		*	5182.855	107.206	103.147	N/A	N/A	4.059	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/20 - 00:57
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11a at Channel 5180MHz	

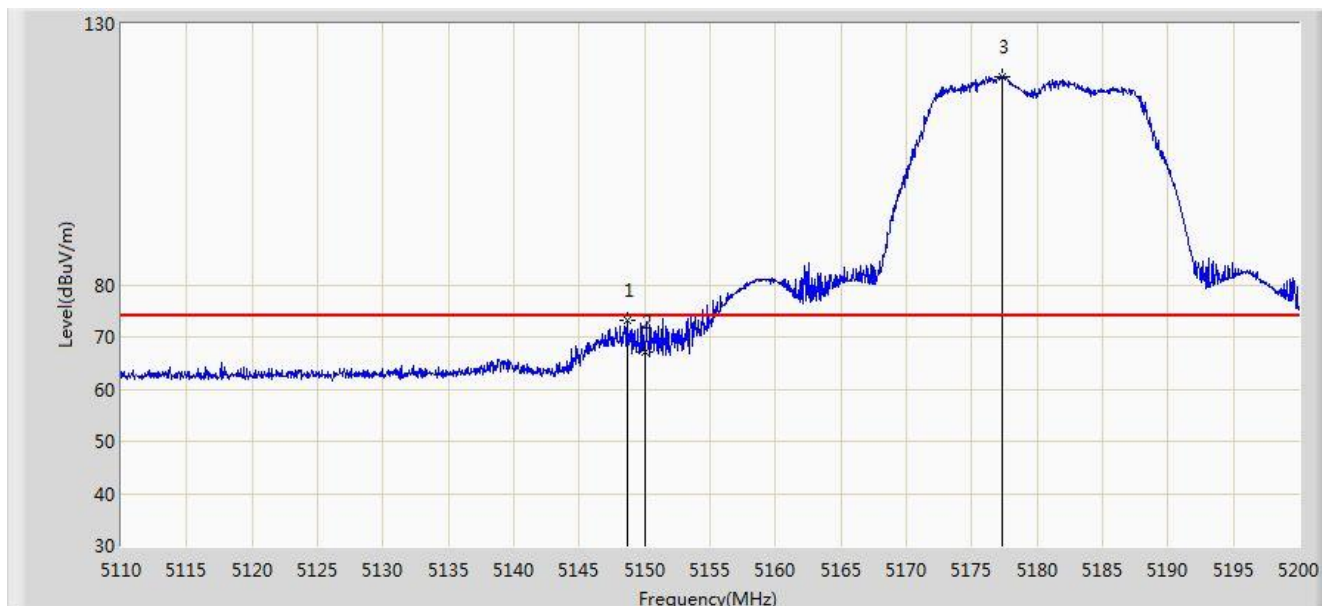


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5148.655	73.124	68.950	-0.876	74.000	4.174	PK
2			5150.000	67.069	62.900	-6.931	74.000	4.170	PK
3		*	5177.275	119.908	115.829	N/A	N/A	4.078	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/20 - 01:01
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11a at Channel 5180MHz	

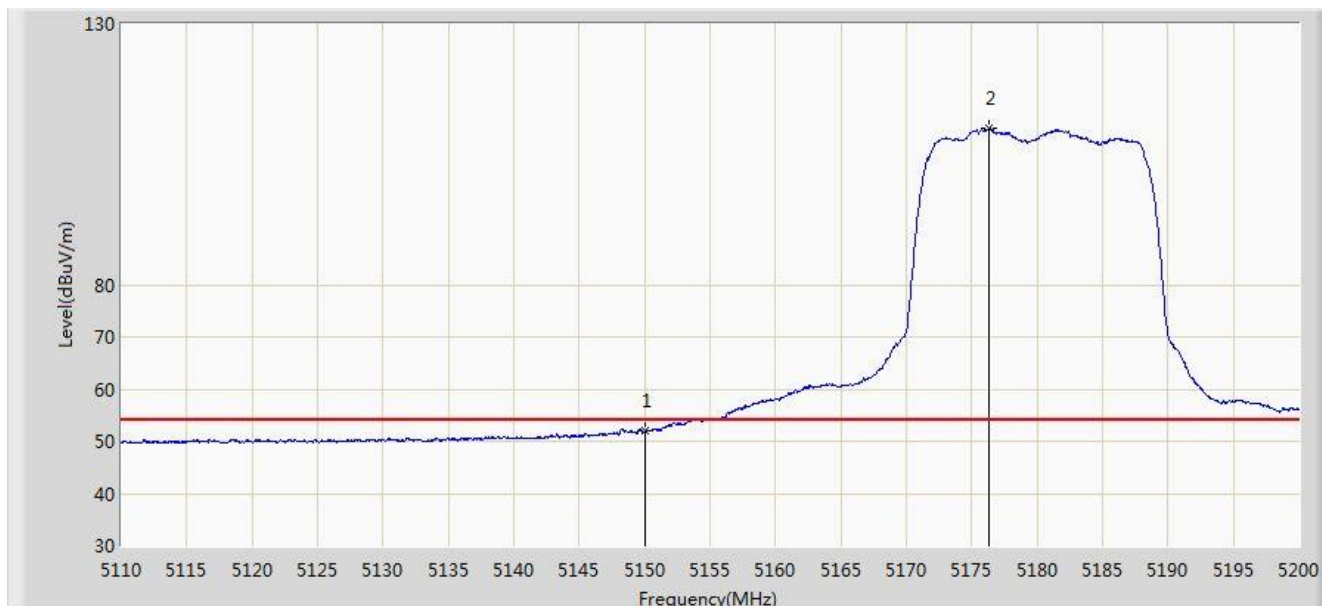


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	51.915	47.746	-2.085	54.000	4.170	AV
2		*	5176.330	109.945	105.863	N/A	N/A	4.081	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/26 - 18:40
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11a at Channel 5320MHz	

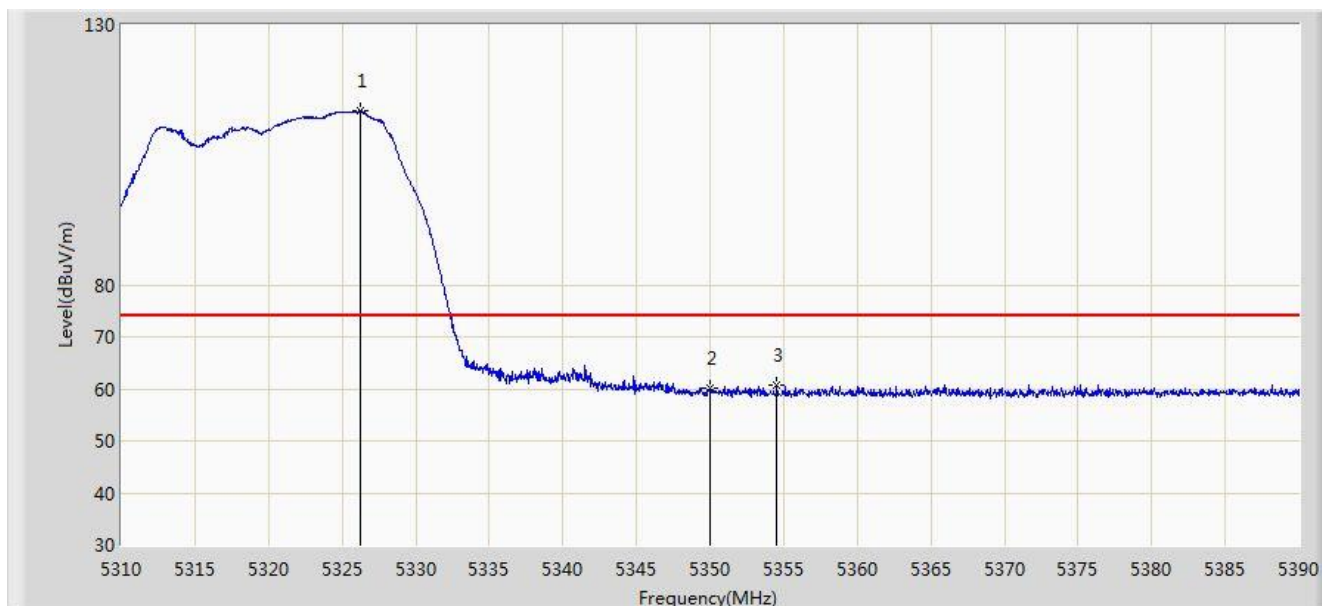


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5326.240	113.394	109.534	N/A	N/A	3.860	PK
2			5350.000	60.190	56.285	-13.810	74.000	3.904	PK
3			5354.560	60.632	56.719	-13.368	74.000	3.913	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/26 - 18:46
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11a at Channel 5320MHz	

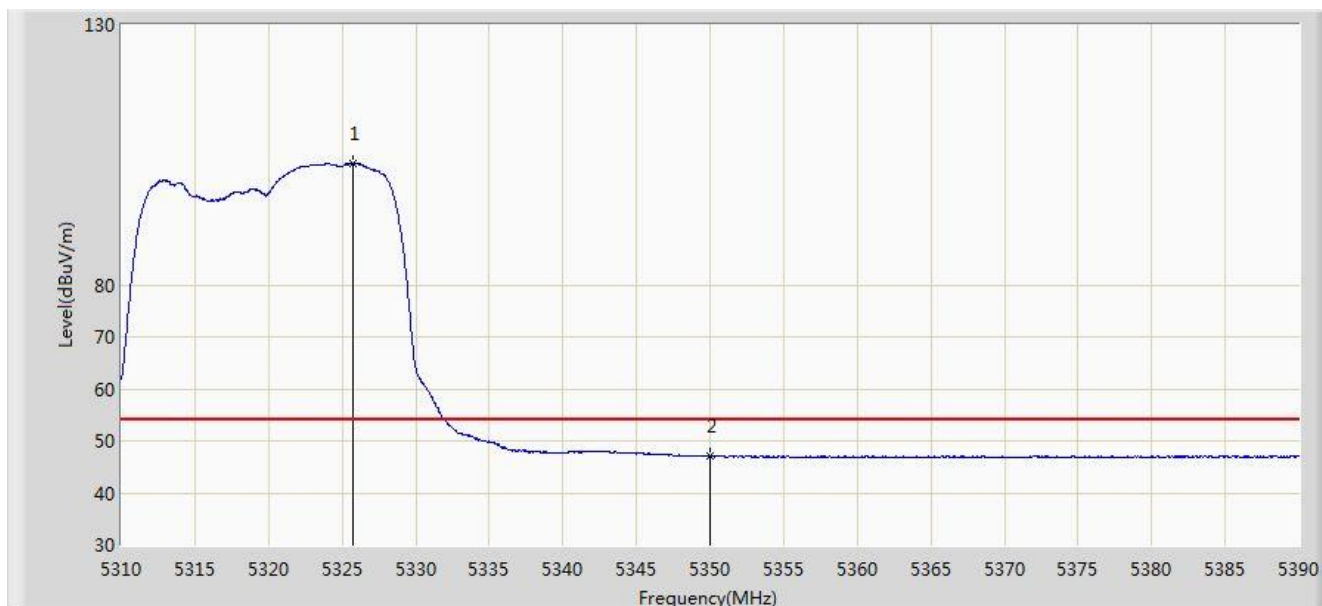


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5325.720	103.361	99.502	N/A	N/A	3.859	AV
2			5350.000	47.068	43.163	-6.932	54.000	3.904	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/26 - 18:51
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11a at Channel 5320MHz	

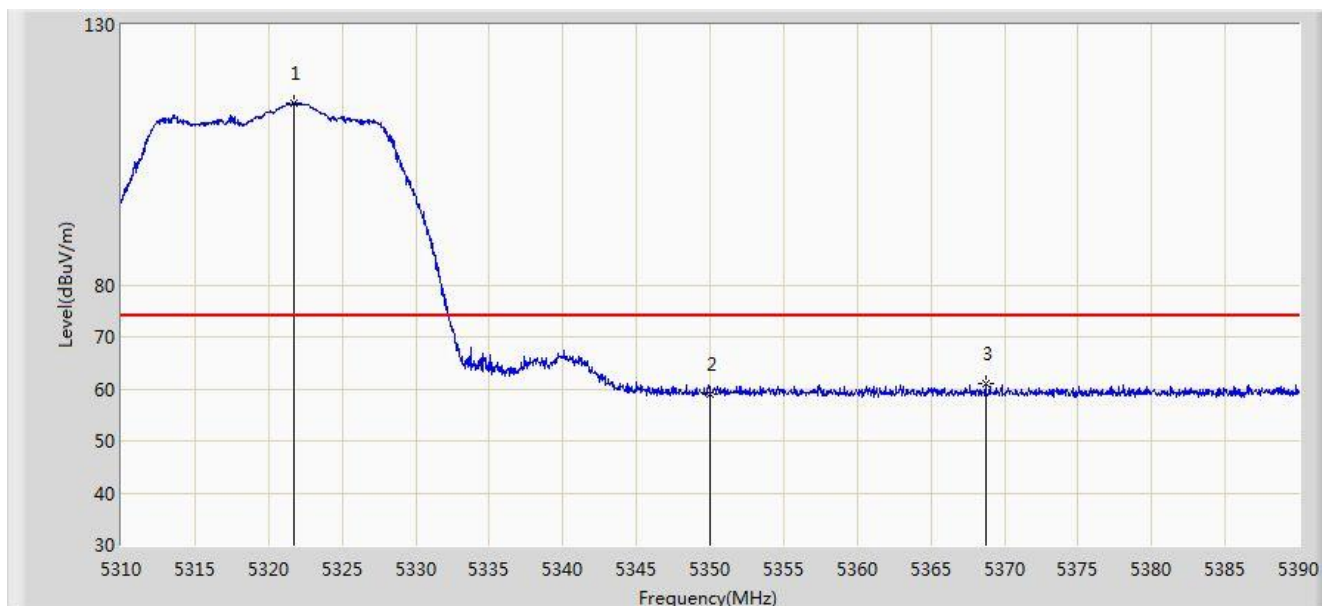


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5321.720	114.892	111.040	N/A	N/A	3.852	PK
2			5350.000	58.979	55.074	-15.021	74.000	3.904	PK
3			5368.720	61.030	57.092	-12.970	74.000	3.939	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/26 - 18:54
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11a at Channel 5320MHz	

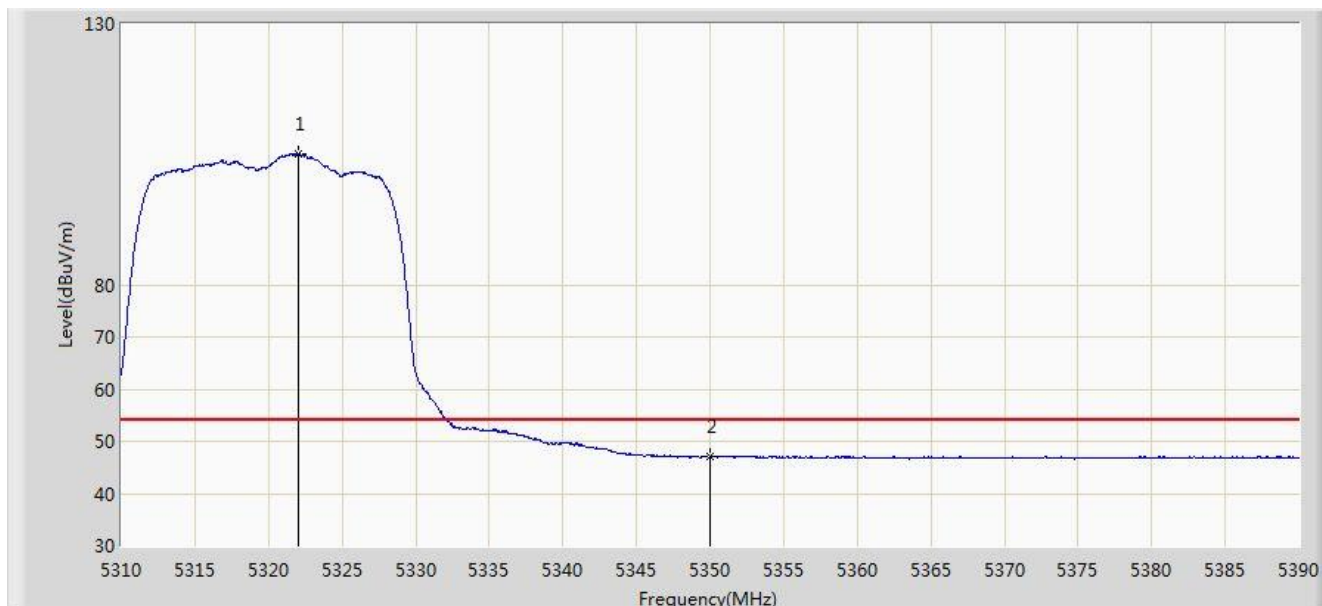


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5322.040	105.064	101.212	N/A	N/A	3.852	AV
2			5350.000	47.033	43.128	-6.967	54.000	3.904	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/26 - 18:58
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11a at Channel 5500MHz	

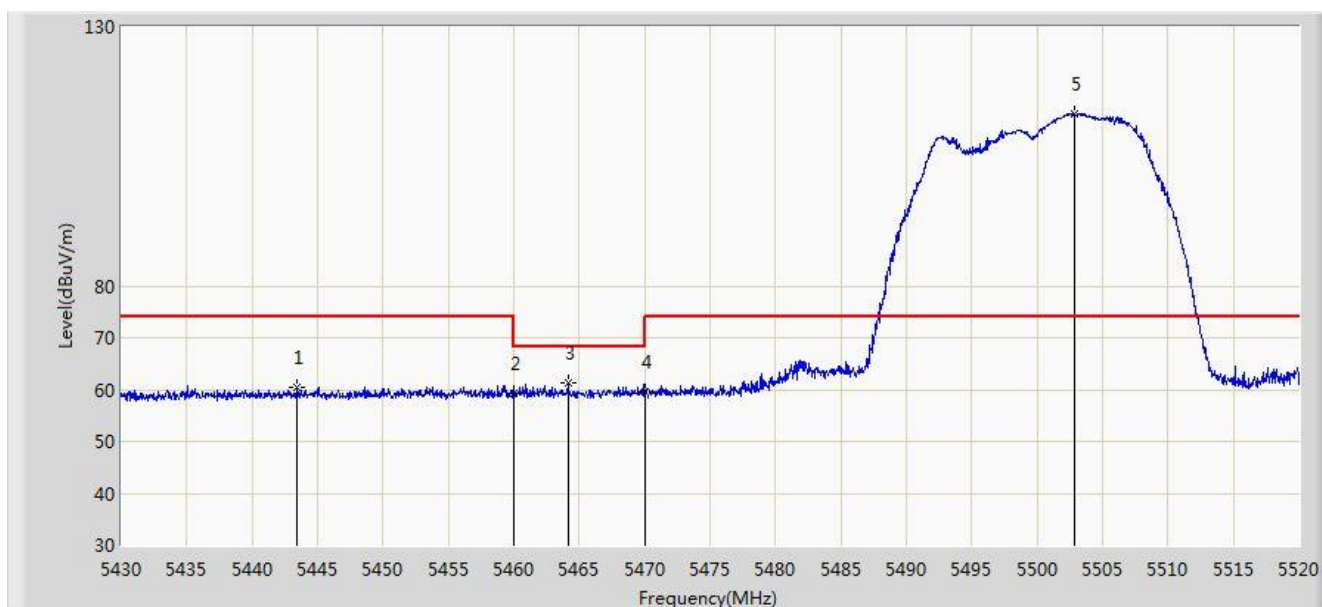


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5443.365	60.377	56.243	-13.623	74.000	4.134	PK
2			5460.000	59.386	55.206	-14.614	74.000	4.180	PK
3			5464.155	61.320	57.131	-6.880	68.200	4.189	PK
4			5470.000	59.667	55.465	-8.533	68.200	4.202	PK
5		*	5502.855	113.241	108.961	N/A	N/A	4.281	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/26 - 19:00
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11a at Channel 5500MHz	

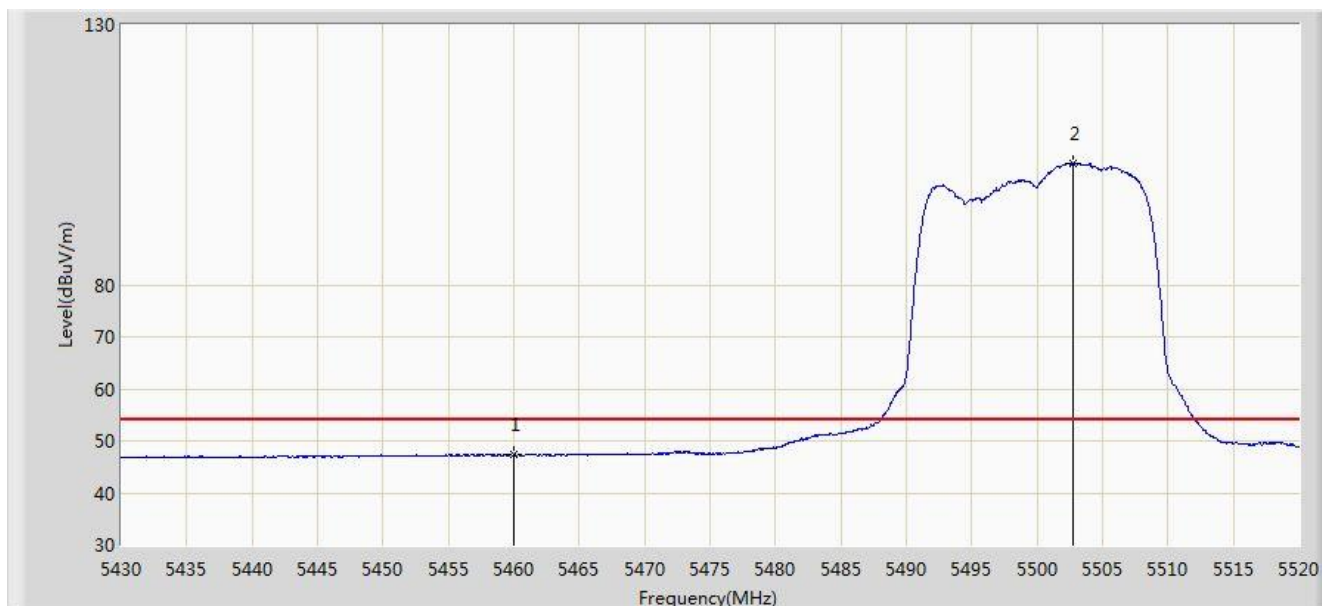


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	47.344	43.164	-6.656	54.000	4.180	AV
2		*	5502.765	103.458	99.178	N/A	N/A	4.281	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/26 - 19:01
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11a at Channel 5500MHz	

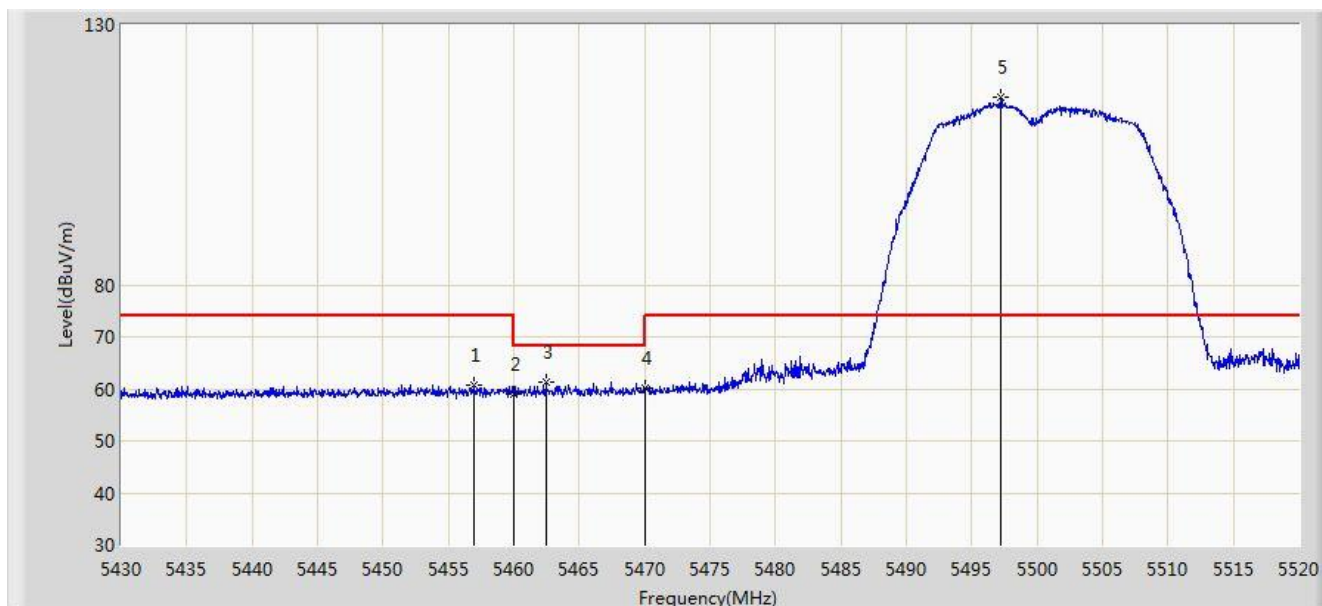


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5457.000	60.797	56.623	-13.203	74.000	4.173	PK
2			5460.000	58.873	54.693	-15.127	74.000	4.180	PK
3			5462.445	61.172	56.987	-7.028	68.200	4.185	PK
4			5470.000	60.046	55.844	-8.154	68.200	4.202	PK
5		*	5497.185	115.994	111.730	N/A	N/A	4.264	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/26 - 19:03
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11a at Channel 5500MHz	

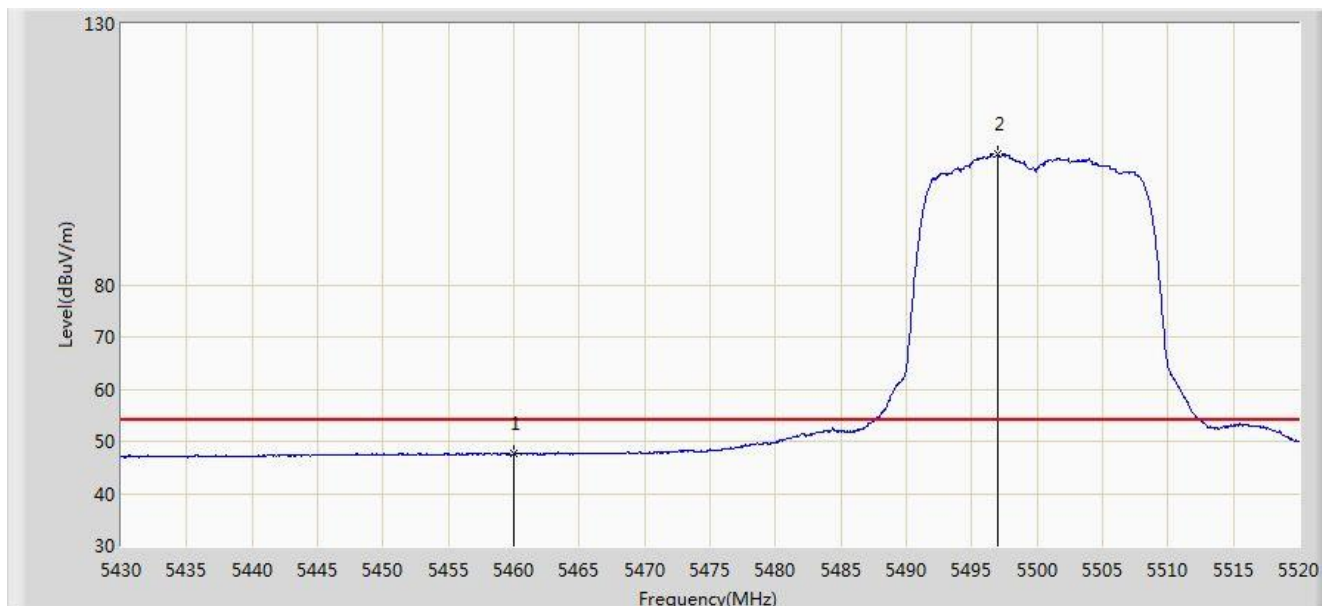


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	47.571	43.391	-6.429	54.000	4.180	AV
2		*	5496.960	104.975	100.711	N/A	N/A	4.264	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/26 - 19:04
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11a at Channel 5700MHz	

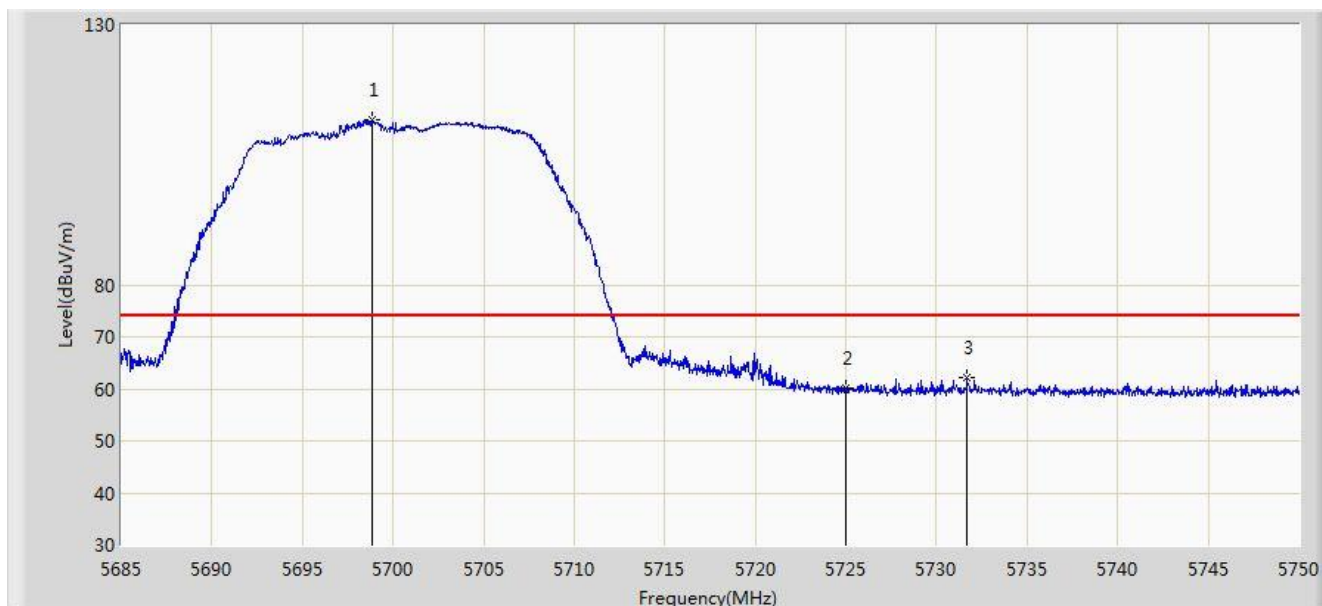


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5698.845	111.652	106.780	N/A	N/A	4.872	PK
2			5725.000	60.114	55.085	-13.886	74.000	5.029	PK
3			5731.670	62.162	57.090	-11.838	74.000	5.071	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/26 - 19:07
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11a at Channel 5700MHz	

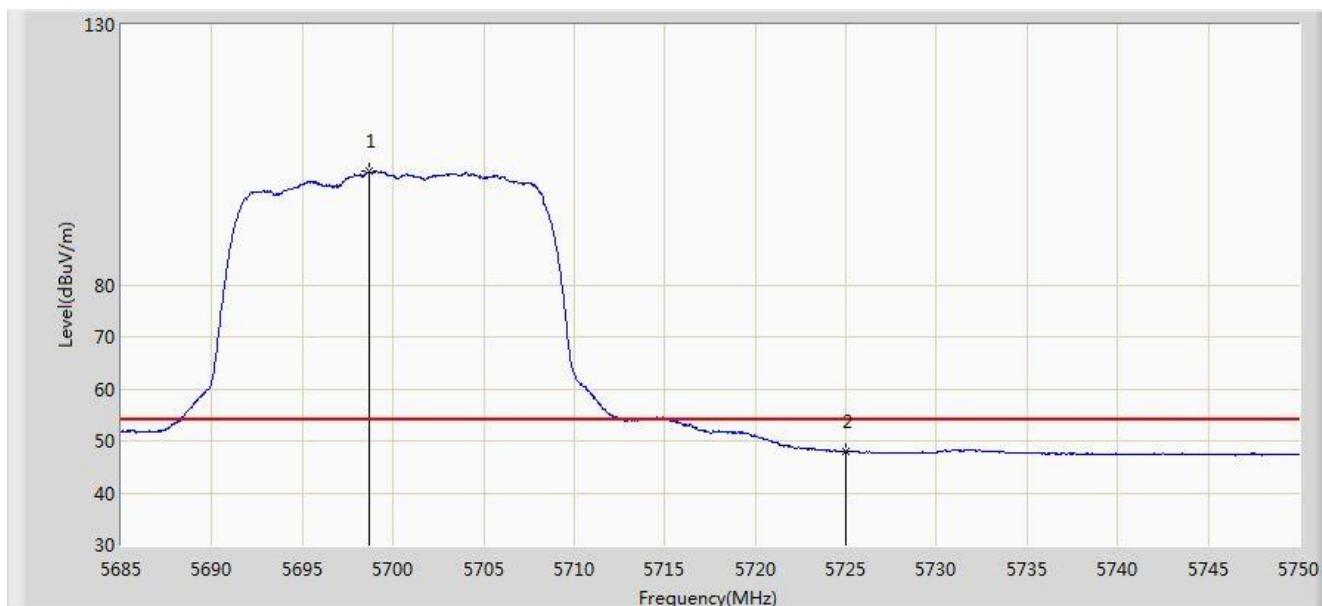


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5698.683	101.842	96.971	N/A	N/A	4.871	AV
2			5725.000	47.832	42.803	-6.168	54.000	5.029	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/26 - 19:08
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11a at Channel 5700MHz	

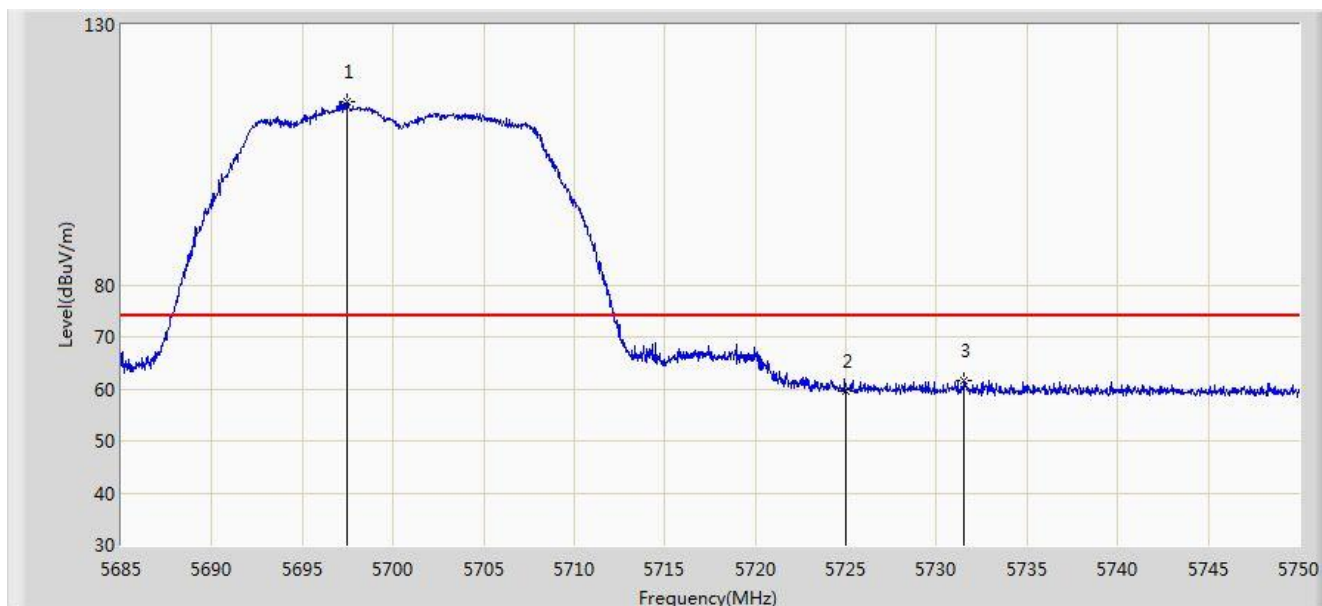


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5697.480	115.106	110.241	N/A	N/A	4.865	PK
2			5725.000	59.594	54.565	-14.406	74.000	5.029	PK
3			5731.540	61.629	56.558	-12.371	74.000	5.071	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/26 - 19:09
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11a at Channel 5700MHz	

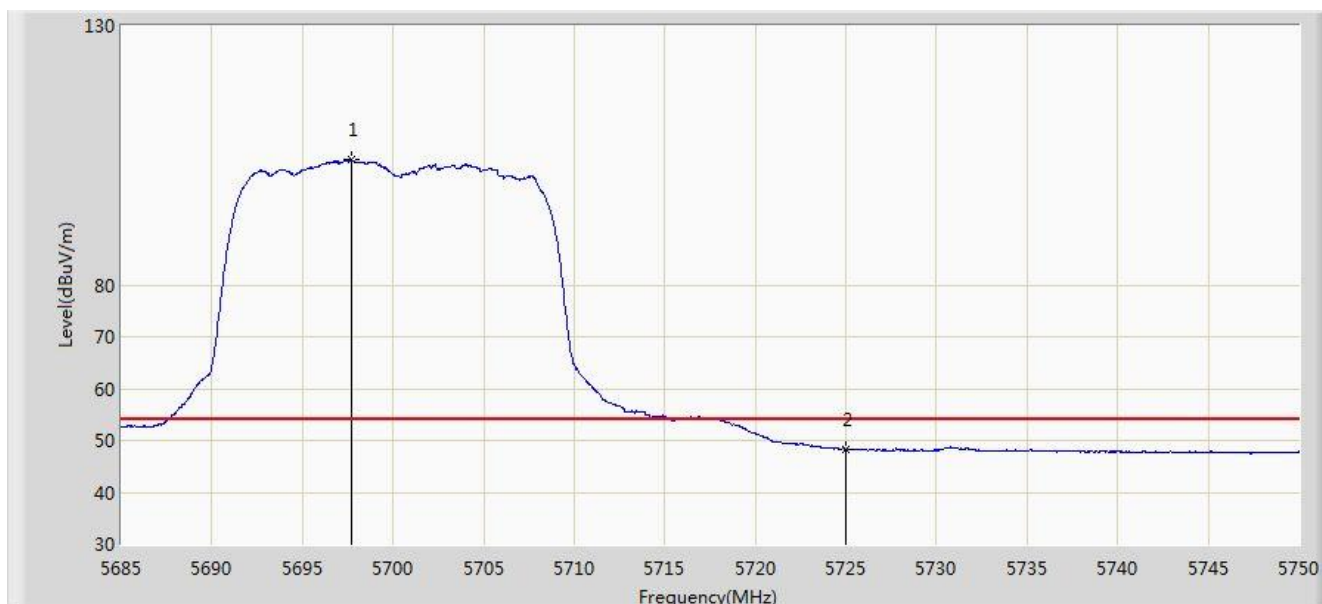


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5697.708	104.168	99.302	N/A	N/A	4.866	AV
2			5725.000	48.255	43.226	-5.745	54.000	5.029	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/20 - 02:14
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11a at Channel 5745MHz	

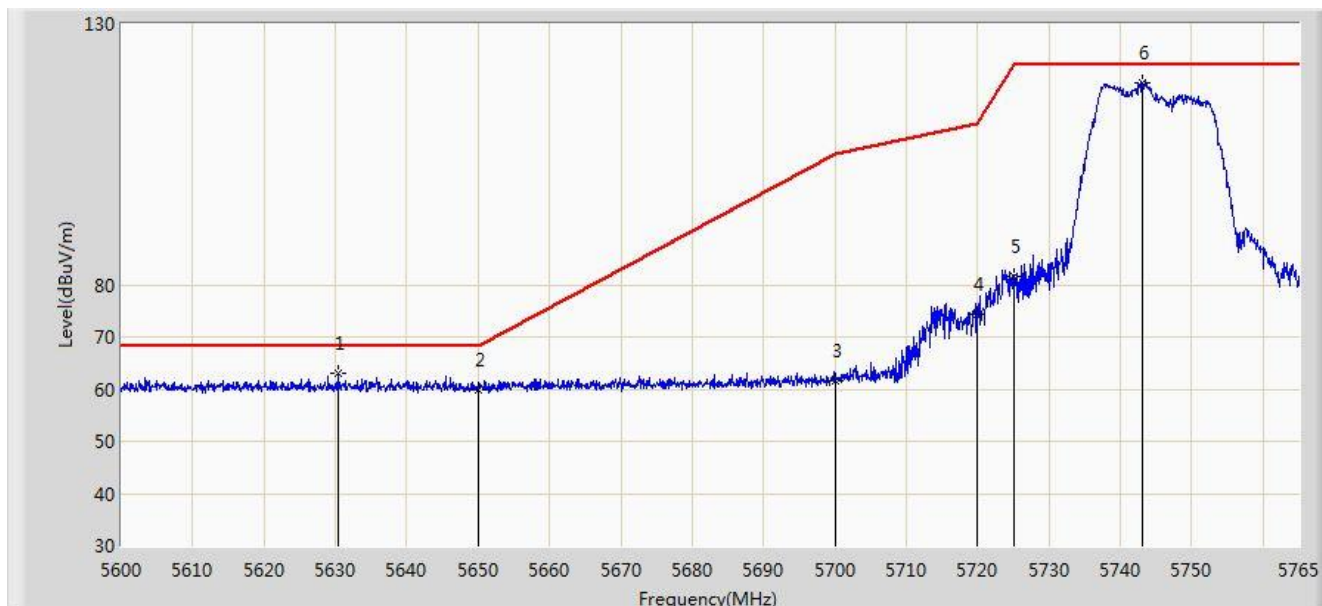


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5630.360	63.137	58.527	-5.063	68.200	4.610	PK
2			5650.000	59.991	55.320	-8.209	68.200	4.671	PK
3			5700.000	61.599	56.721	-43.601	105.200	4.878	PK
4			5720.000	74.458	69.461	-36.342	110.800	4.997	PK
5			5725.000	81.631	76.602	-40.569	122.200	5.029	PK
6		*	5743.055	118.795	113.651	N/A	N/A	5.144	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/20 - 02:16
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11a at Channel 5745MHz	

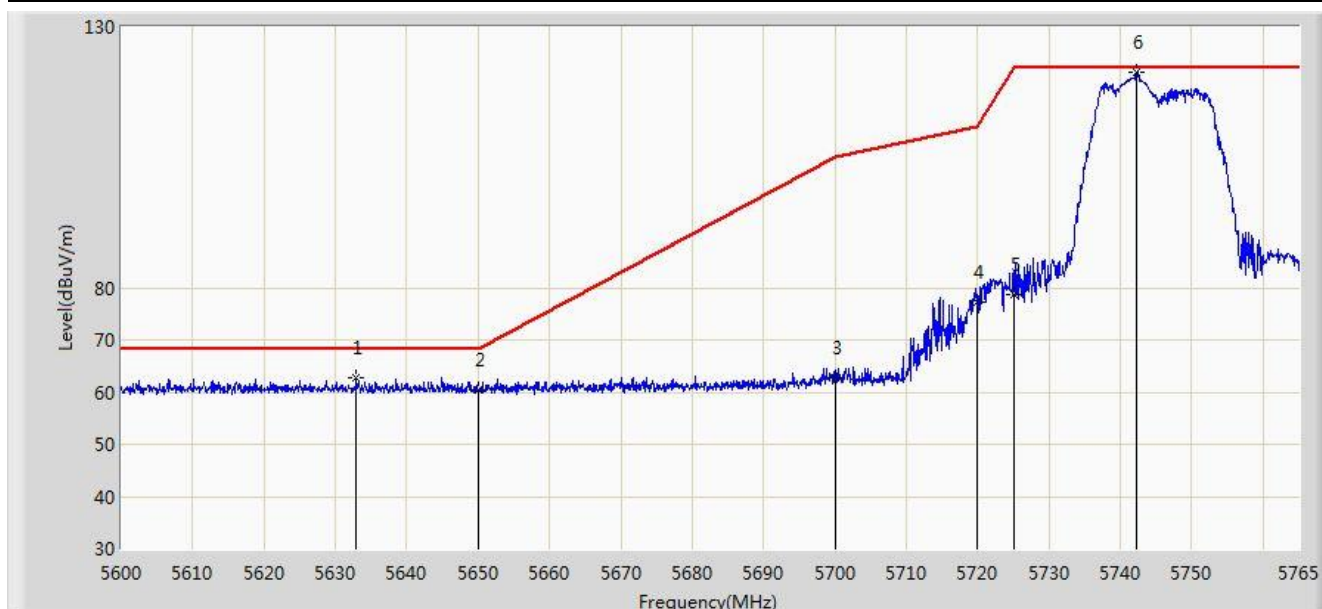


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5632.917	62.778	58.161	-5.422	68.200	4.618	PK
2			5650.000	60.327	55.656	-7.873	68.200	4.671	PK
3			5700.000	62.614	57.736	-42.586	105.200	4.878	PK
4			5720.000	77.346	72.349	-33.454	110.800	4.997	PK
5			5725.000	78.592	73.563	-43.608	122.200	5.029	PK
6		*	5742.312	121.287	116.148	N/A	N/A	5.139	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/20 - 02:18
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11a at Channel 5825MHz	

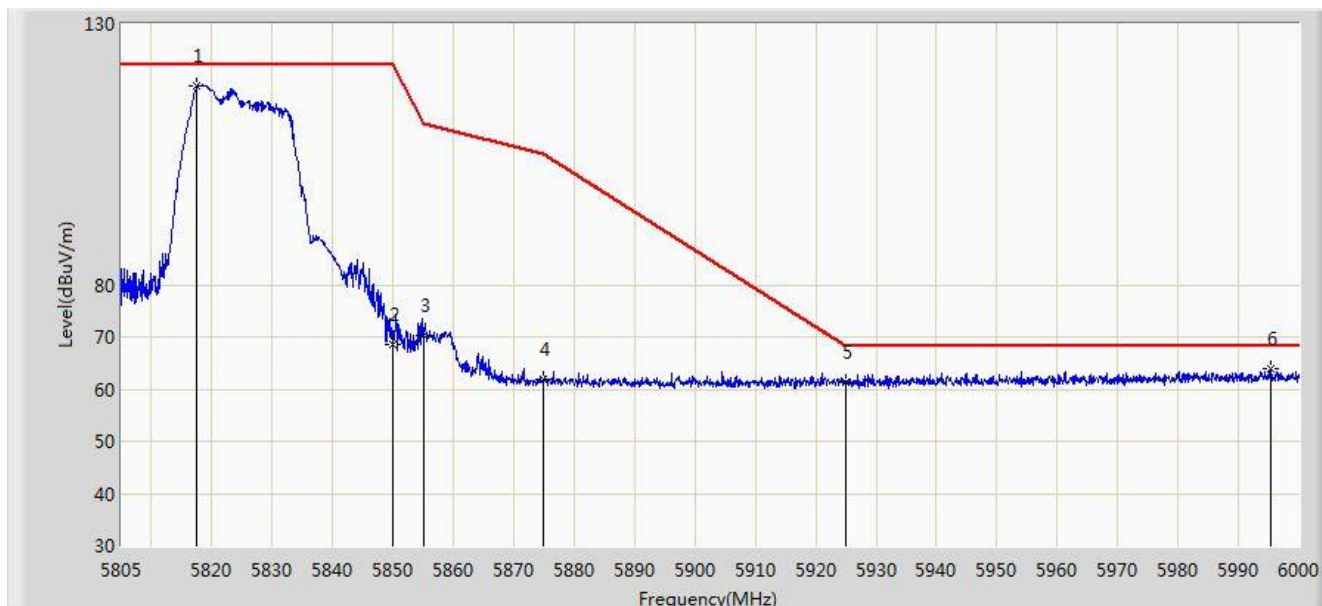


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5817.578	118.048	112.503	N/A	N/A	5.544	PK
2			5850.000	68.419	62.693	-53.781	122.200	5.726	PK
3			5855.000	70.331	64.585	-40.469	110.800	5.746	PK
4			5875.000	61.852	56.032	-43.348	105.200	5.820	PK
5			5925.000	61.234	55.268	-6.966	68.200	5.967	PK
6			5995.320	63.949	57.846	-4.251	68.200	6.102	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/20 - 02:21
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11a at Channel 5825MHz	

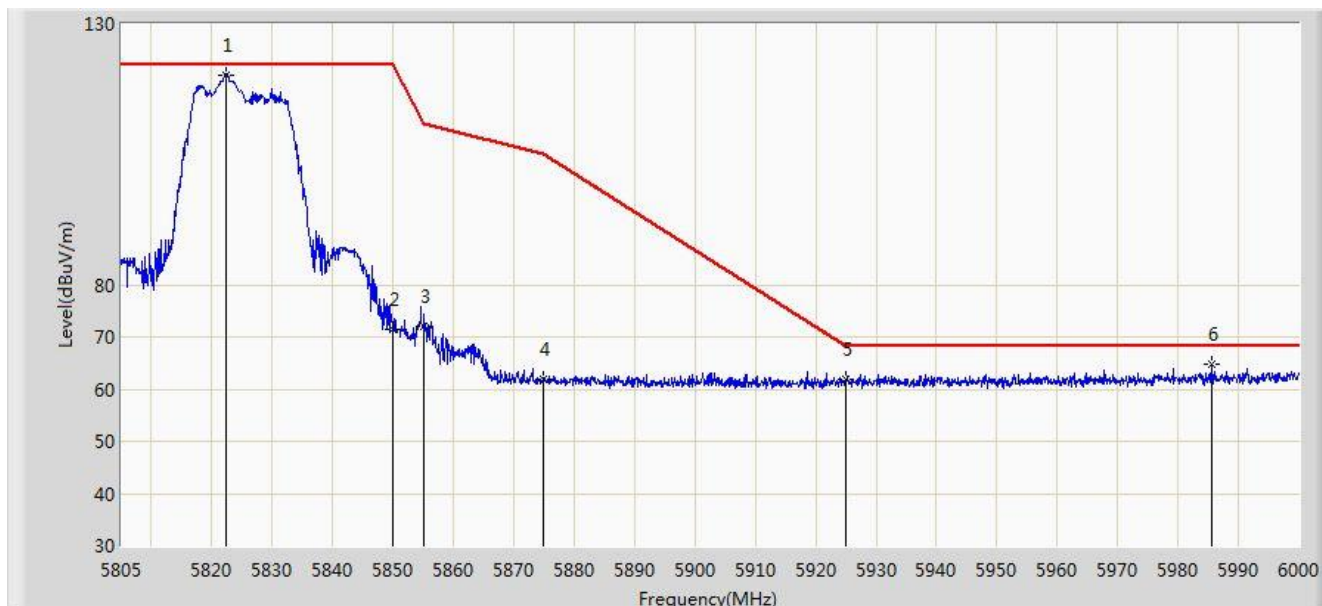


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5822.257	120.275	114.703	N/A	N/A	5.572	PK
2			5850.000	71.329	65.603	-50.871	122.200	5.726	PK
3			5855.000	72.111	66.365	-38.689	110.800	5.746	PK
4			5875.000	61.860	56.040	-43.340	105.200	5.820	PK
5			5925.000	61.772	55.806	-6.428	68.200	5.967	PK
6			5985.667	64.812	58.725	-3.388	68.200	6.087	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/20 - 02:49
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11ac-VHT20 at Channel 5180MHz	

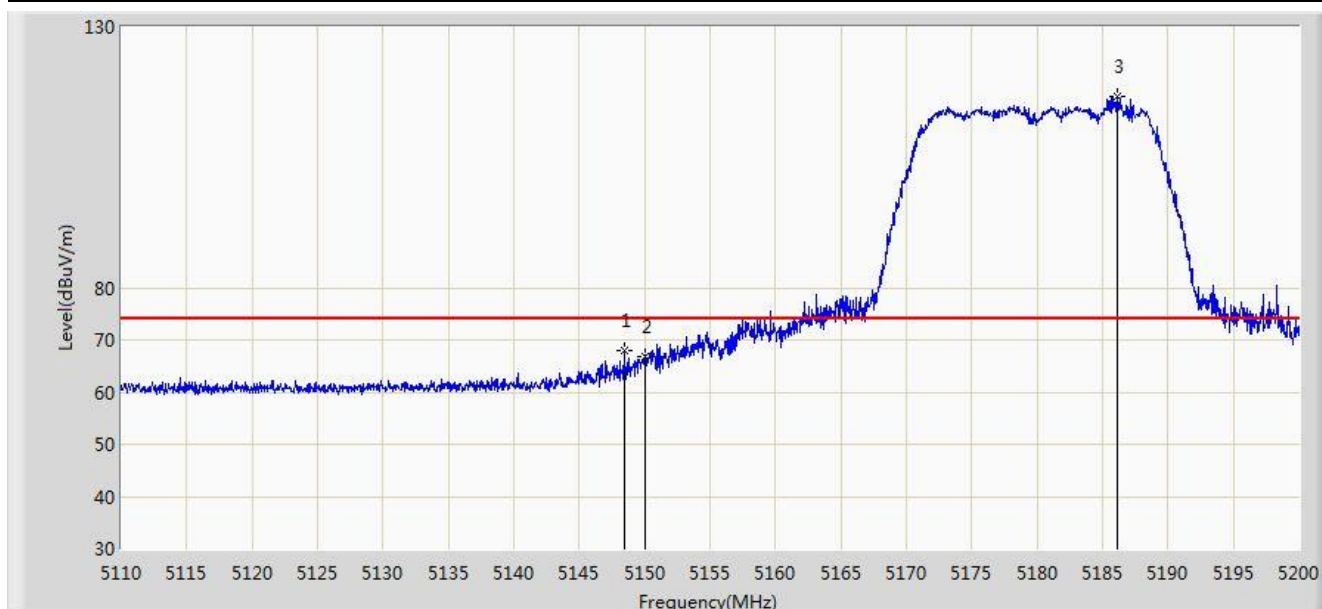


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5148.430	68.029	63.855	-5.971	74.000	4.174	PK
2			5150.000	66.797	62.628	-7.203	74.000	4.170	PK
3		*	5186.140	116.629	112.582	N/A	N/A	4.047	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/20 - 02:51
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11ac-VHT20 at Channel 5180MHz	

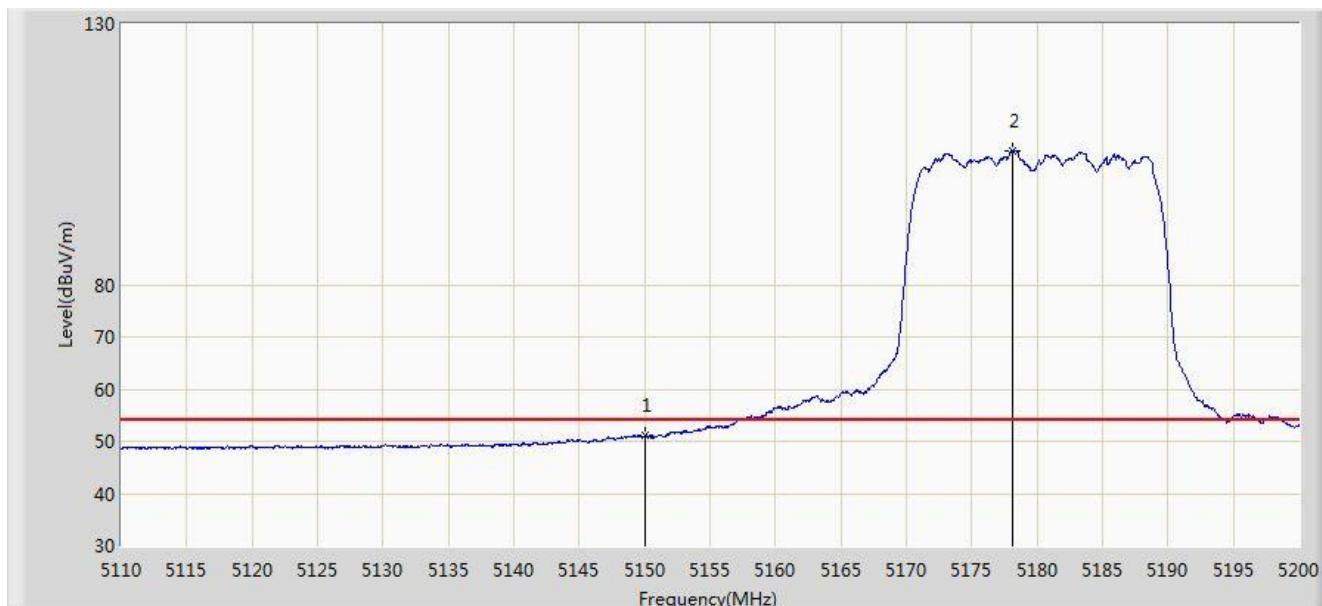


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	51.142	46.973	-2.858	54.000	4.170	AV
2		*	5178.085	105.630	101.554	N/A	N/A	4.076	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/20 - 02:47
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11ac-VHT20 at Channel 5180MHz	

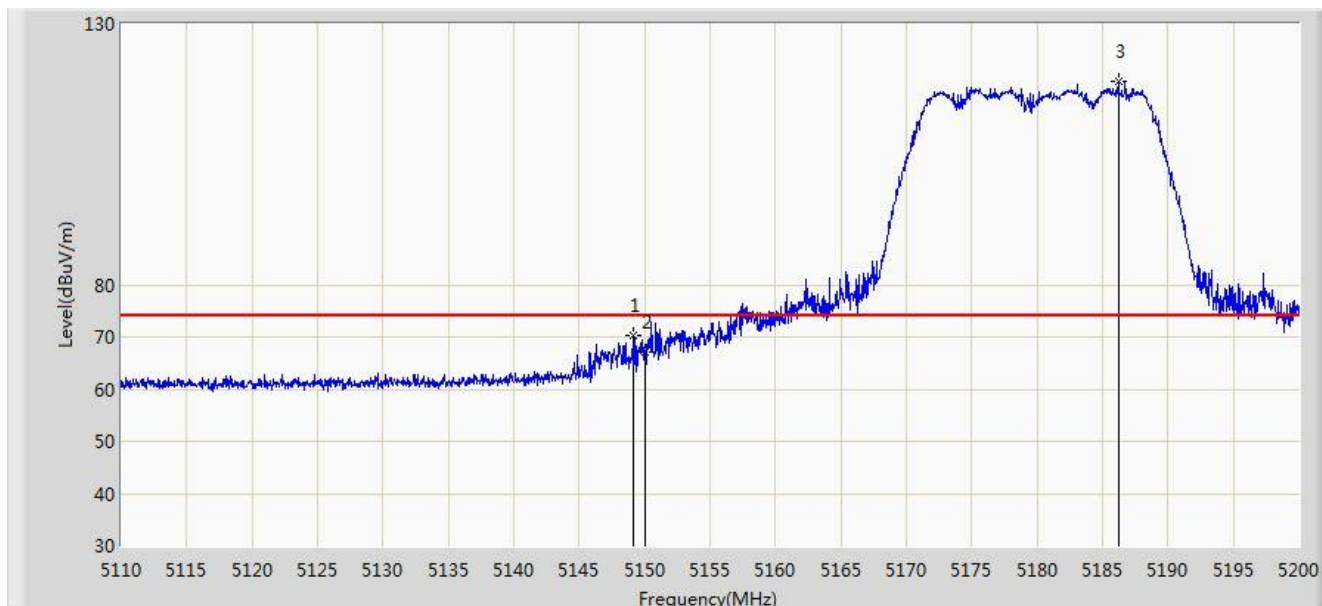


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5149.150	70.189	66.017	-3.811	74.000	4.172	PK
2			5150.000	67.187	63.018	-6.813	74.000	4.170	PK
3		*	5186.185	118.917	114.870	N/A	N/A	4.047	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/20 - 02:46
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11ac-VHT20 at Channel 5180MHz	

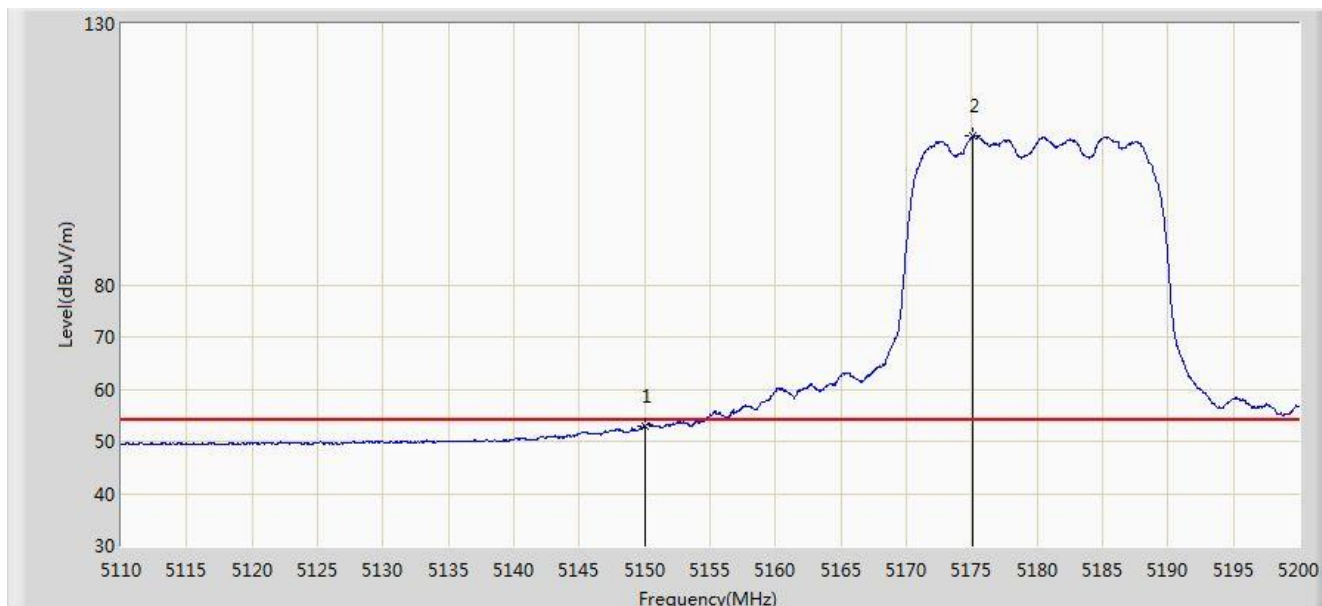


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	52.987	48.818	-1.013	54.000	4.170	AV
2	X	*	5175.115	108.478	104.392	N/A	N/A	4.086	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/26 - 19:13
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11ac-VHT20 at Channel 5320MHz	

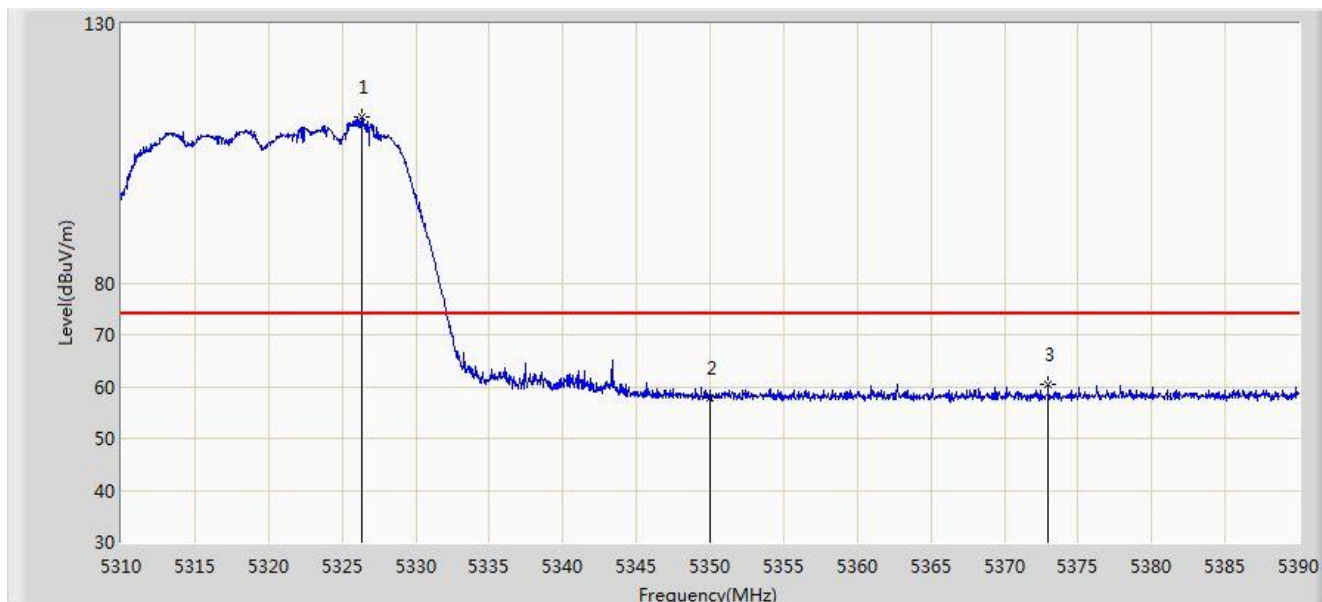


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5326.320	111.900	108.039	N/A	N/A	3.861	PK
2			5350.000	57.742	53.837	-16.258	74.000	3.904	PK
3			5372.960	60.471	56.525	-13.529	74.000	3.946	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/26 - 19:22
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11ac-VHT20 at Channel 5320MHz	

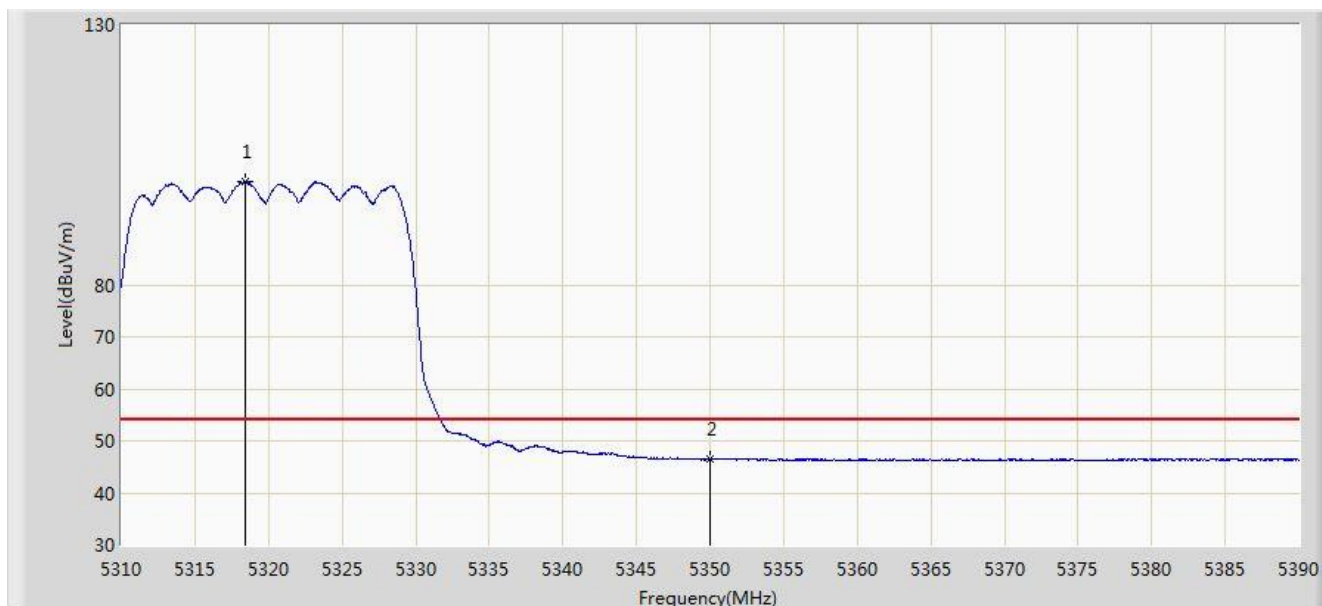


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5318.400	99.944	96.099	N/A	N/A	3.845	AV
2			5350.000	46.424	42.519	-7.576	54.000	3.904	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/26 - 19:26
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11ac-VHT20 at Channel 5320MHz	

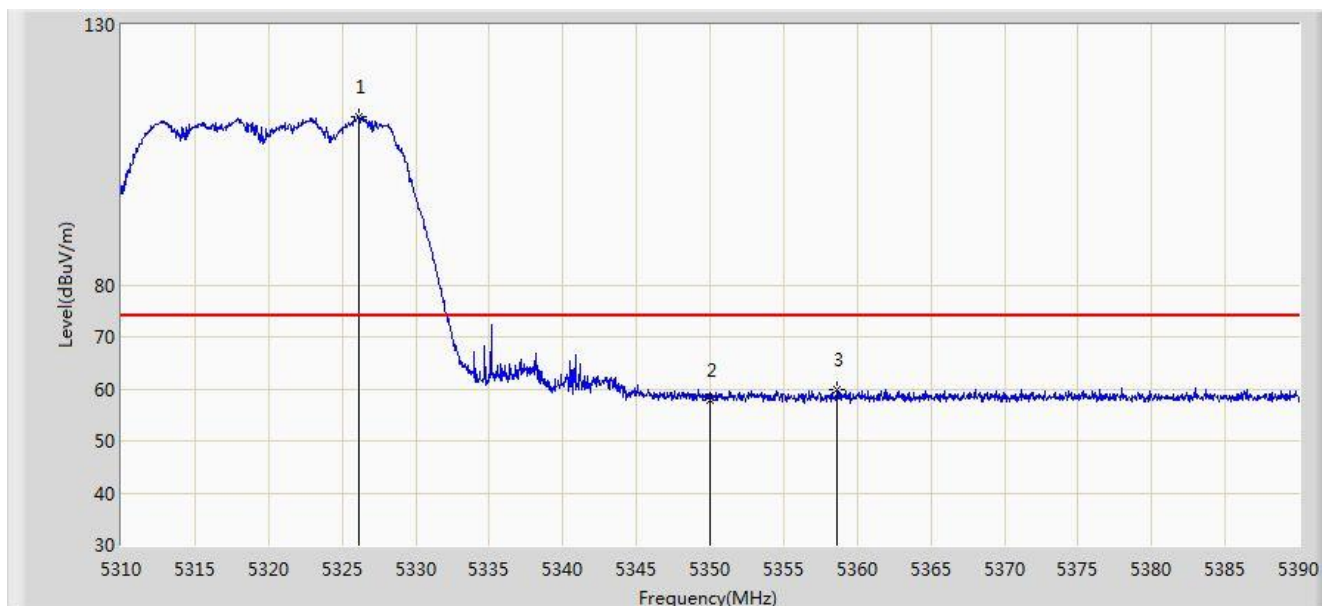


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5326.160	112.321	108.461	N/A	N/A	3.860	PK
2			5350.000	57.710	53.805	-16.290	74.000	3.904	PK
3			5358.640	59.990	56.070	-14.010	74.000	3.921	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/26 - 19:28
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11ac-VHT20 at Channel 5320MHz	

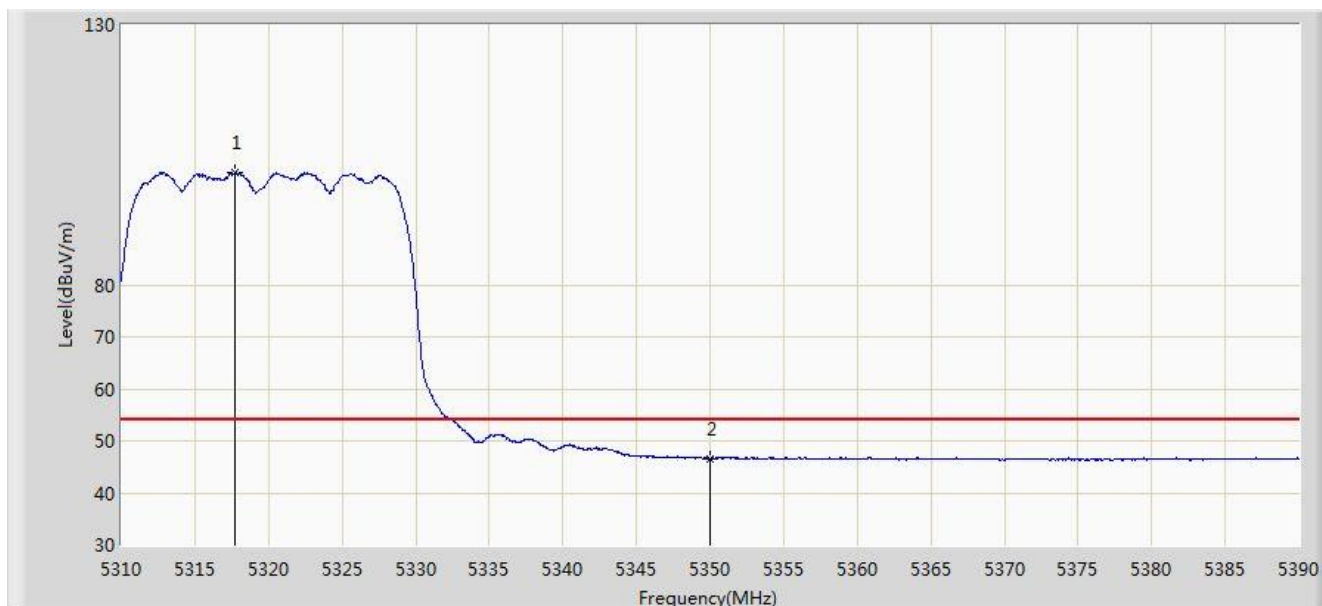


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5317.720	101.522	97.678	N/A	N/A	3.845	AV
2			5350.000	46.589	42.684	-7.411	54.000	3.904	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/26 - 19:29
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11ac-VHT20 at Channel 5500MHz	

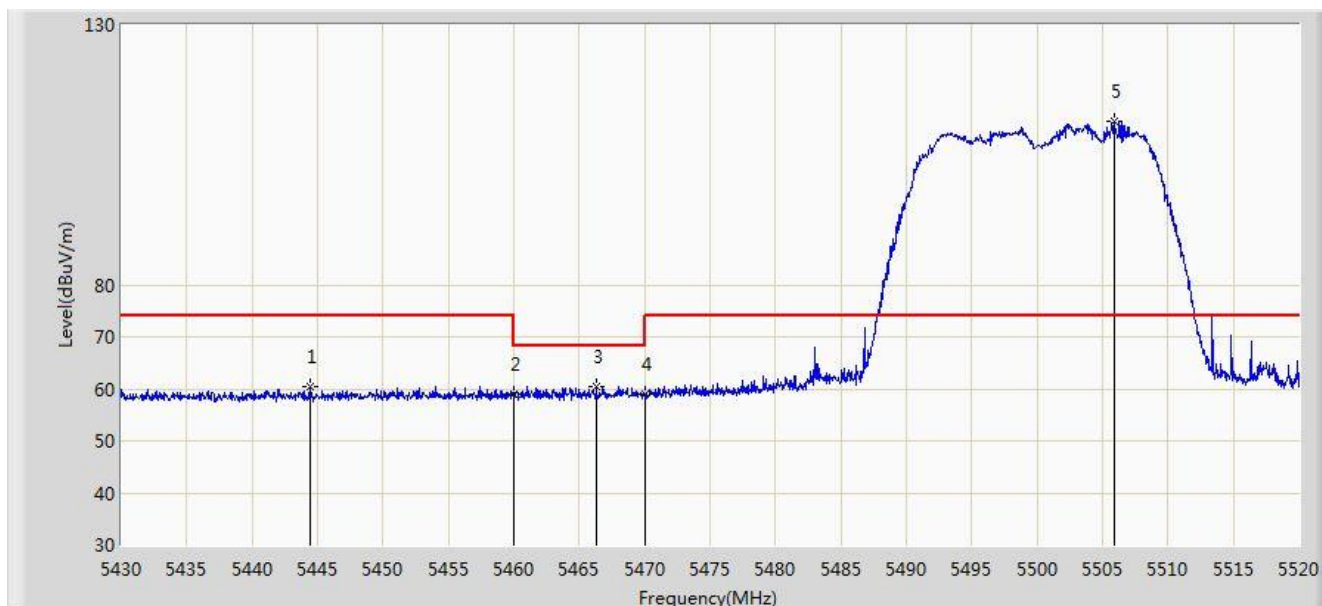


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5444.400	60.485	56.348	-13.515	74.000	4.137	PK
2			5460.000	58.910	54.730	-15.090	74.000	4.180	PK
3			5466.315	60.348	56.154	-7.852	68.200	4.194	PK
4			5470.000	59.028	54.826	-9.172	68.200	4.202	PK
5		*	5505.915	111.546	107.257	N/A	N/A	4.289	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/26 - 19:31
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11ac-VHT20 at Channel 5500MHz	

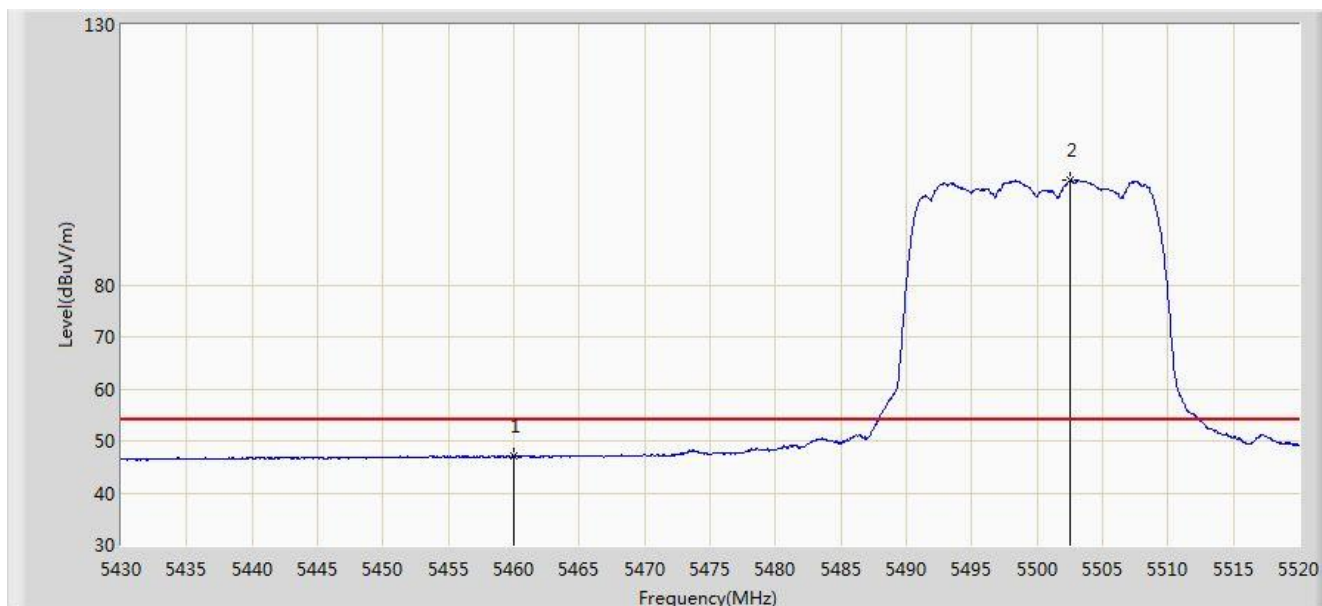


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	47.024	42.844	-6.976	54.000	4.180	AV
2		*	5502.540	100.173	95.894	N/A	N/A	4.279	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/26 - 19:32
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11ac-VHT20 at Channel 5500MHz	

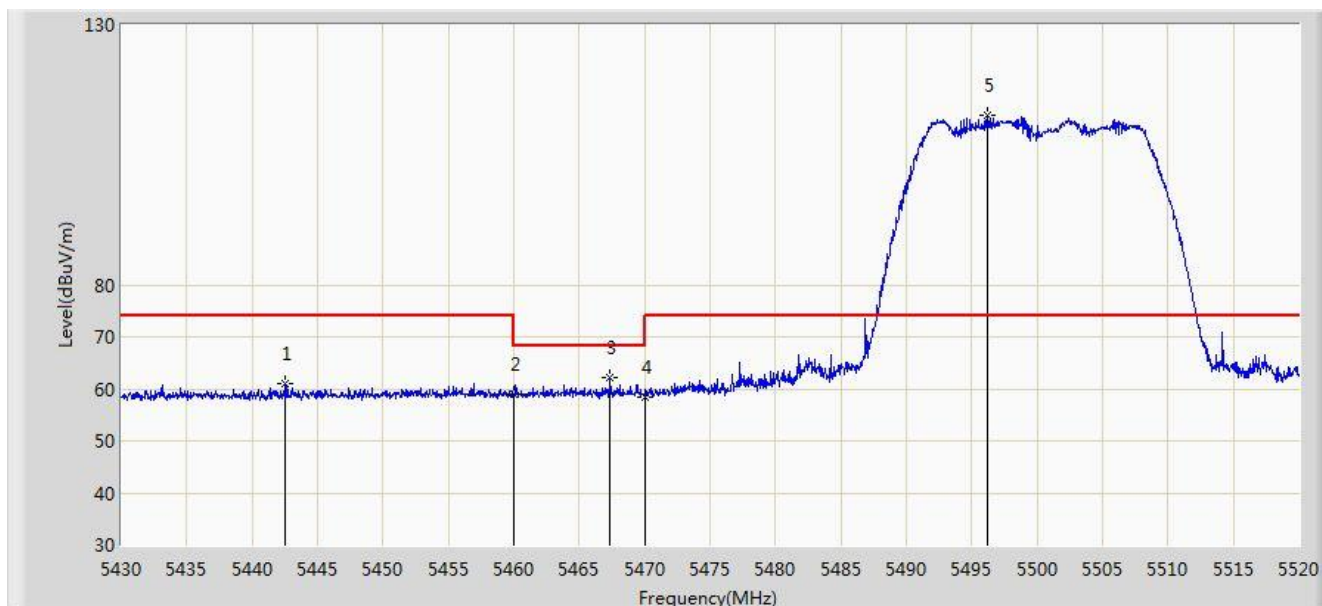


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5442.555	60.874	56.742	-13.126	74.000	4.131	PK
2			5460.000	58.848	54.668	-15.152	74.000	4.180	PK
3			5467.350	62.115	57.919	-6.085	68.200	4.196	PK
4			5470.000	58.491	54.289	-9.709	68.200	4.202	PK
5		*	5496.195	112.704	108.442	N/A	N/A	4.261	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/26 - 19:34
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11ac-VHT20 at Channel 5500MHz	

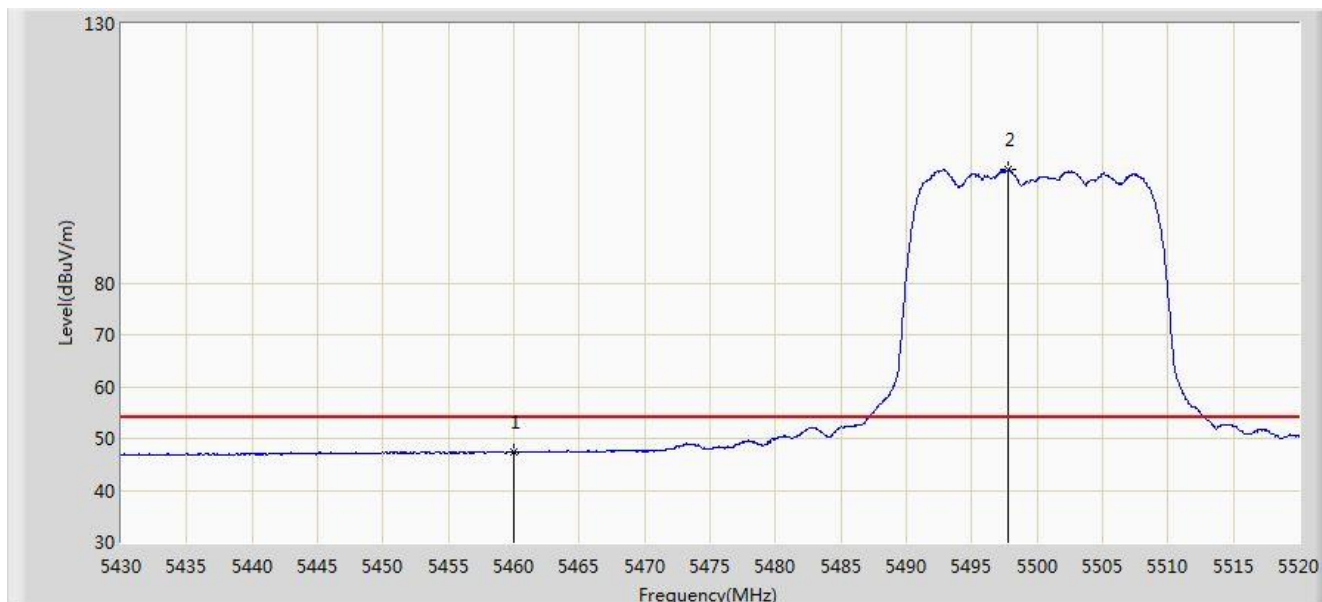


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	47.357	43.177	-6.643	54.000	4.180	AV
2		*	5497.815	101.753	97.487	N/A	N/A	4.266	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/26 - 19:35
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11ac-VHT20 at Channel 5700MHz	

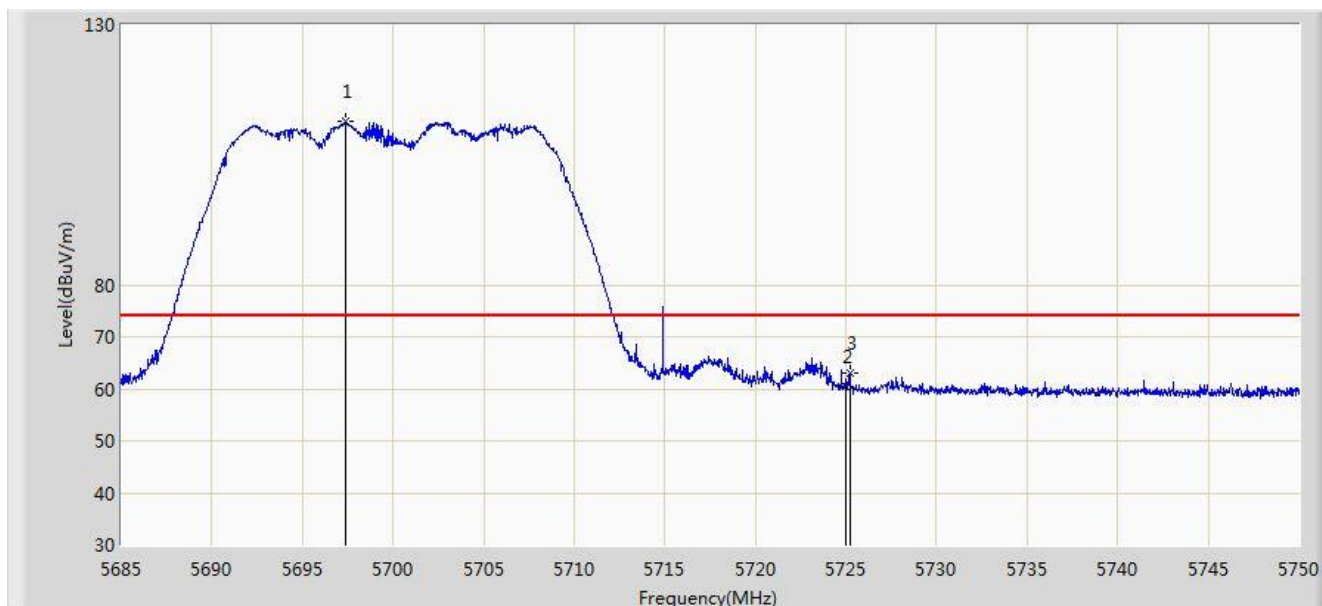


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5697.382	111.335	106.471	N/A	N/A	4.865	PK
2			5725.000	60.404	55.375	-13.596	74.000	5.029	PK
3			5725.235	62.949	57.918	-11.051	74.000	5.030	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/26 - 19:37
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11ac-VHT20 at Channel 5700MHz	

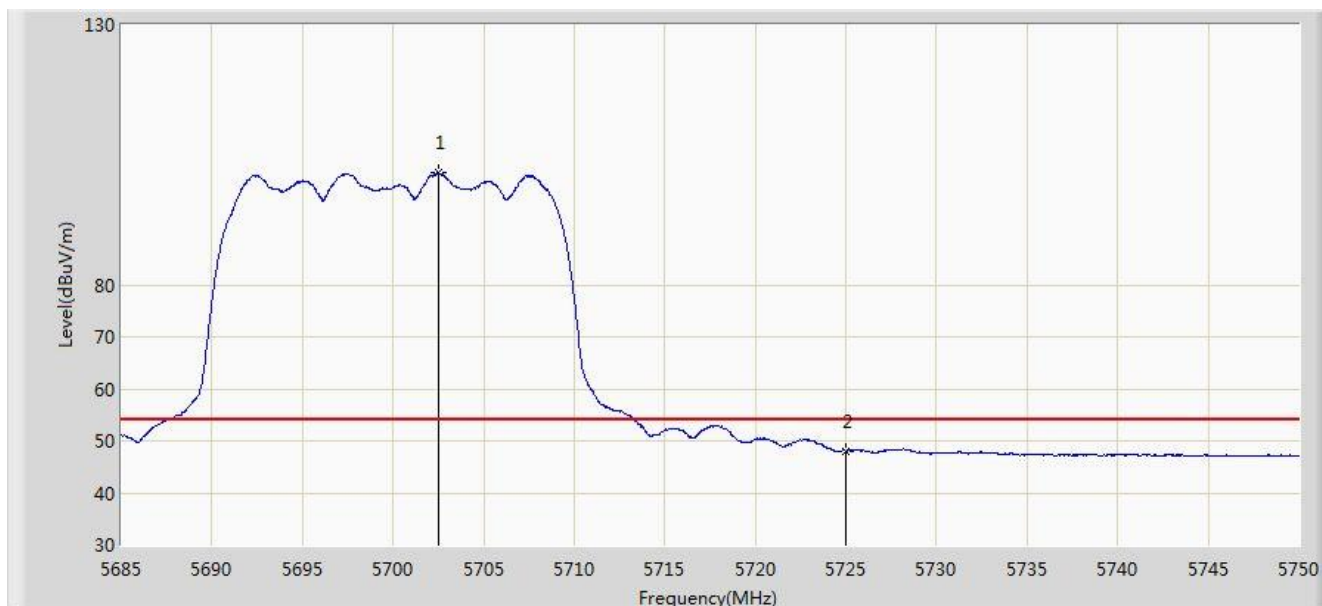


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5702.518	101.530	96.638	N/A	N/A	4.891	AV
2			5725.000	48.081	43.052	-5.919	54.000	5.029	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/26 - 19:39
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: 510 系列存取點	Power: AC 110V/60Hz
測試模式 Transmit by 802.11ac-VHT20 at Channel 5700MHz	

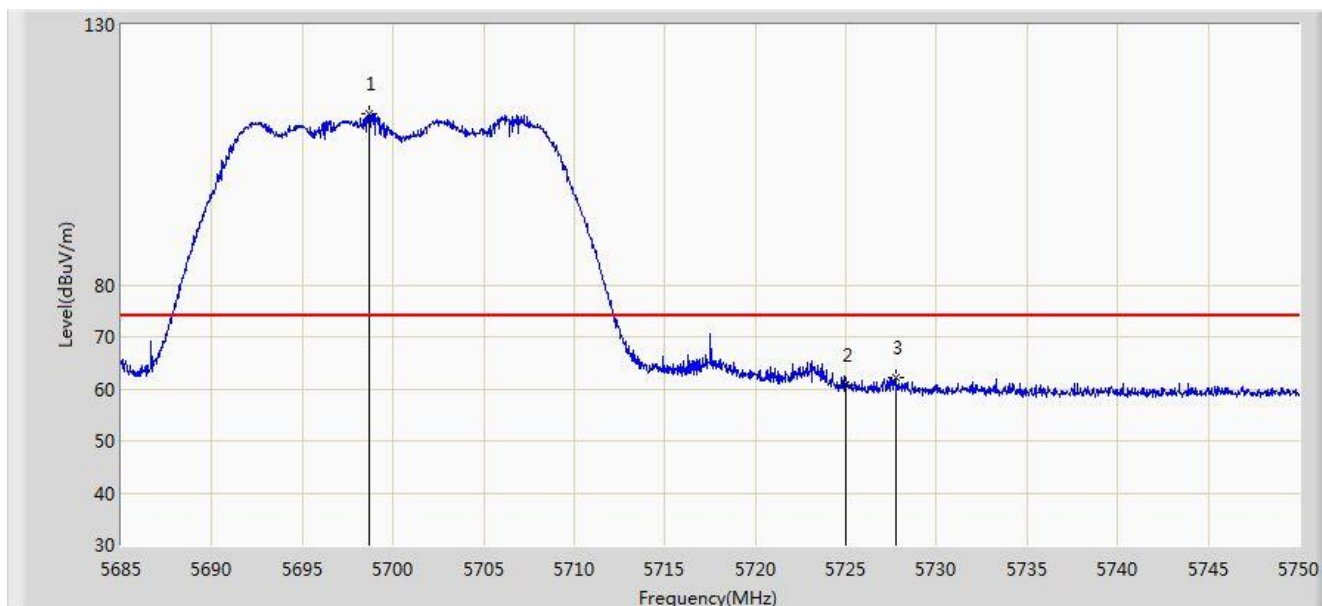

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5698.715	112.902	108.031	N/A	N/A	4.872	PK
2			5725.000	60.859	55.830	-13.141	74.000	5.029	PK
3			5727.770	62.178	57.131	-11.822	74.000	5.047	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)