


Site: AC1	Time: 2020/04/24 - 13:28
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE80 at channel 5290MHz with OAW-AP1322	

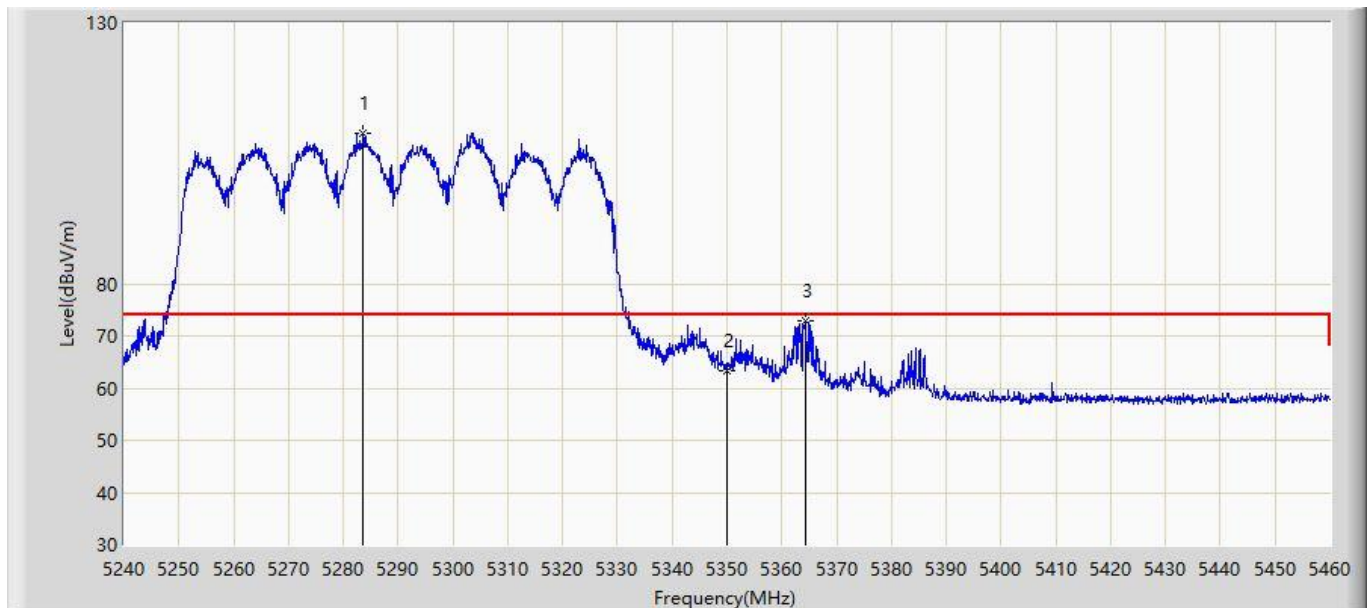


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5283.560	108.809	105.078	N/A	N/A	3.731	PK
2			5350.000	63.233	59.459	-10.767	74.000	3.774	PK
3			5364.410	72.909	69.126	-1.091	74.000	3.783	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/24 - 13:30
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE80 at channel 5290MHz with OAW-AP1322	

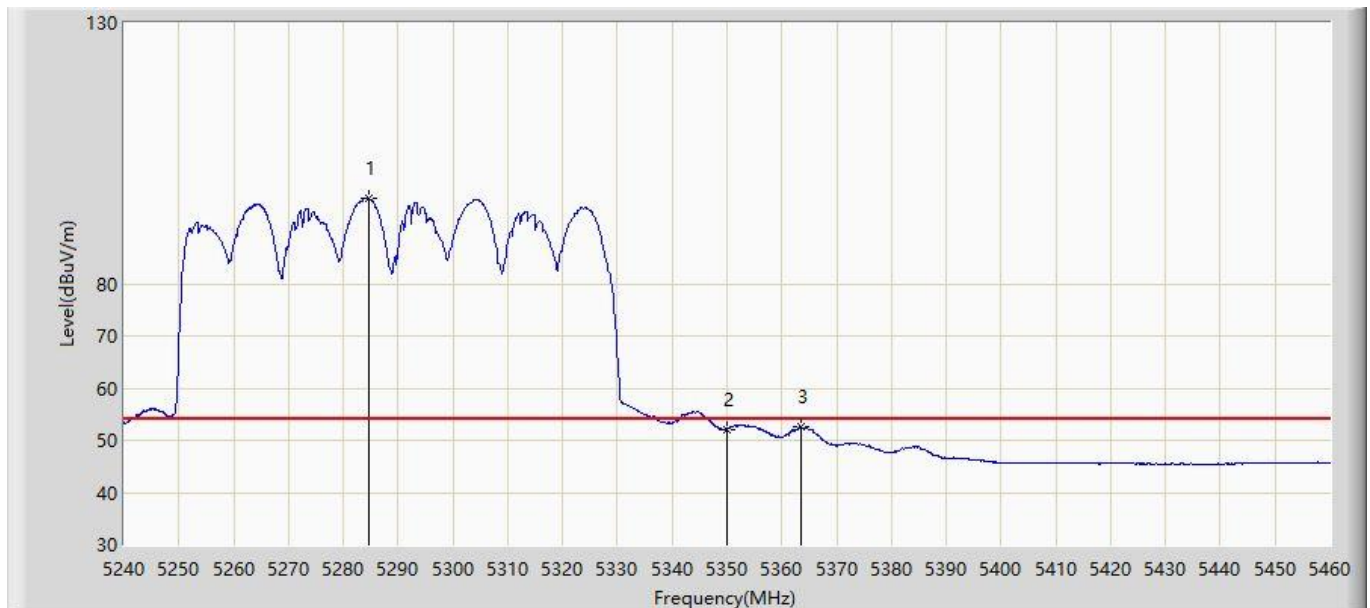


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5284.660	96.238	92.506	N/A	N/A	3.731	AV
2			5350.000	52.124	48.350	-1.876	54.000	3.774	AV
3			5363.420	52.527	48.745	-1.473	54.000	3.783	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/24 - 13:31
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE80 at channel 5290MHz with OAW-AP1322	

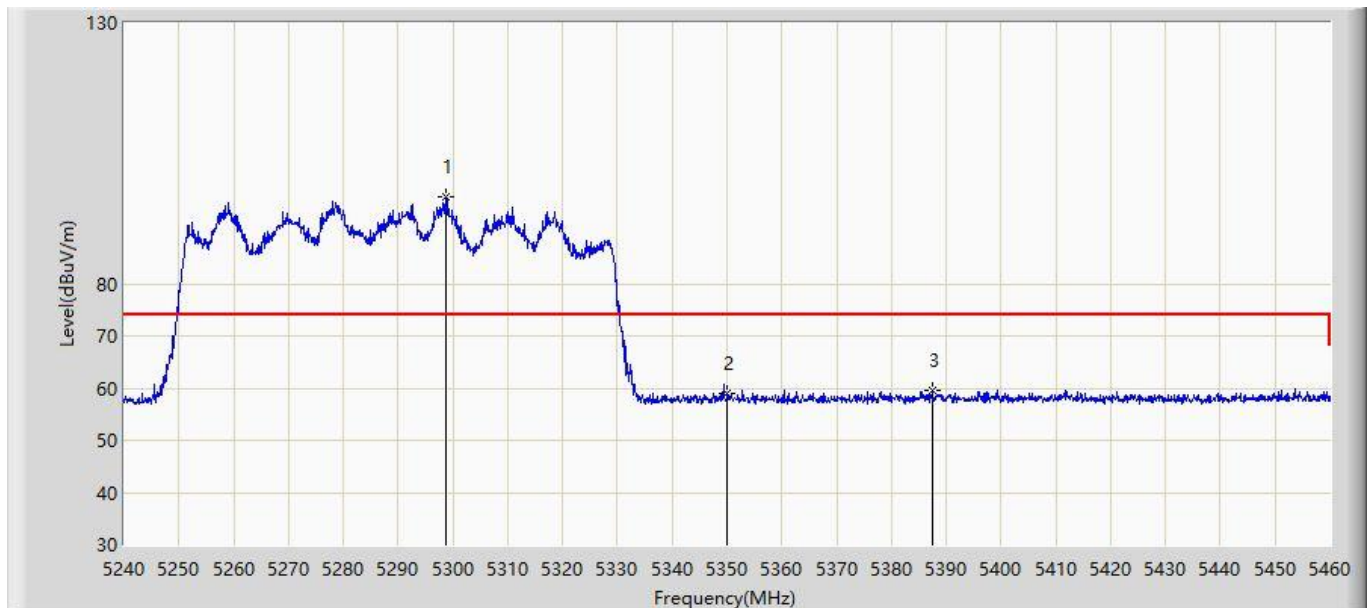


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5298.630	96.616	92.875	N/A	N/A	3.741	PK
2			5350.000	58.966	55.192	-15.034	74.000	3.774	PK
3			5387.400	59.585	55.787	-14.415	74.000	3.798	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/24 - 13:32
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE80 at channel 5290MHz with OAW-AP1322	

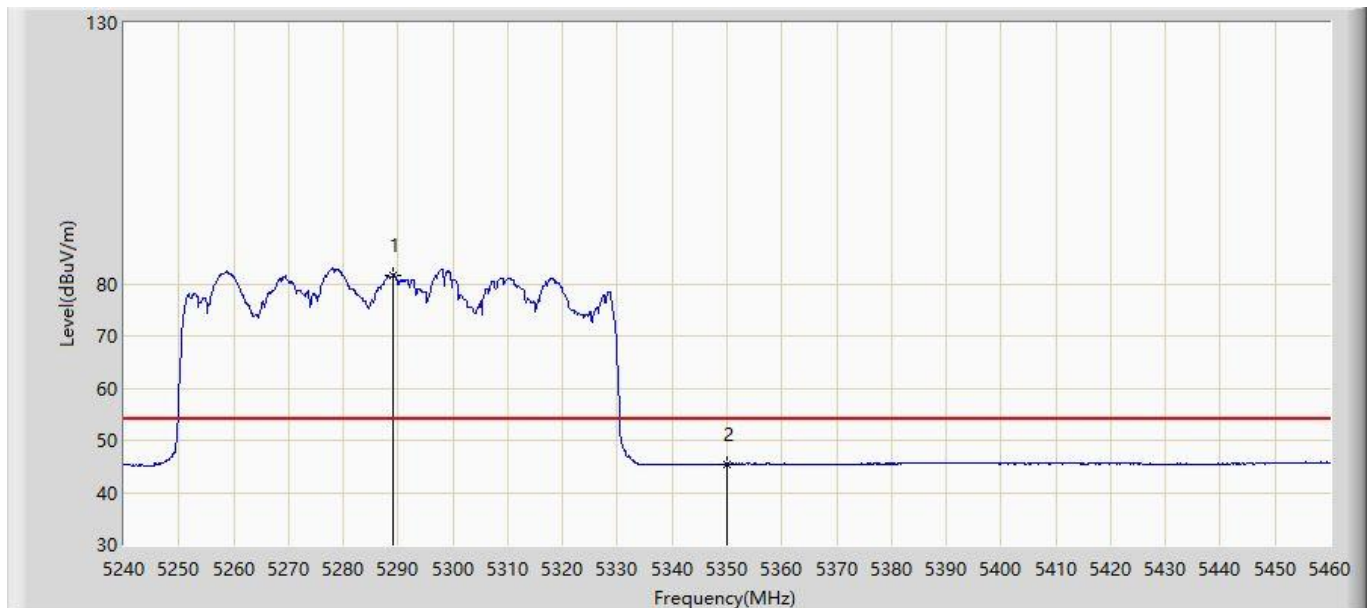


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5289.060	81.721	77.986	N/A	N/A	3.735	AV
2			5350.000	45.480	41.706	-8.520	54.000	3.774	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/18 - 17:12
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE80 at channel 5530MHz with OAW-AP1322	

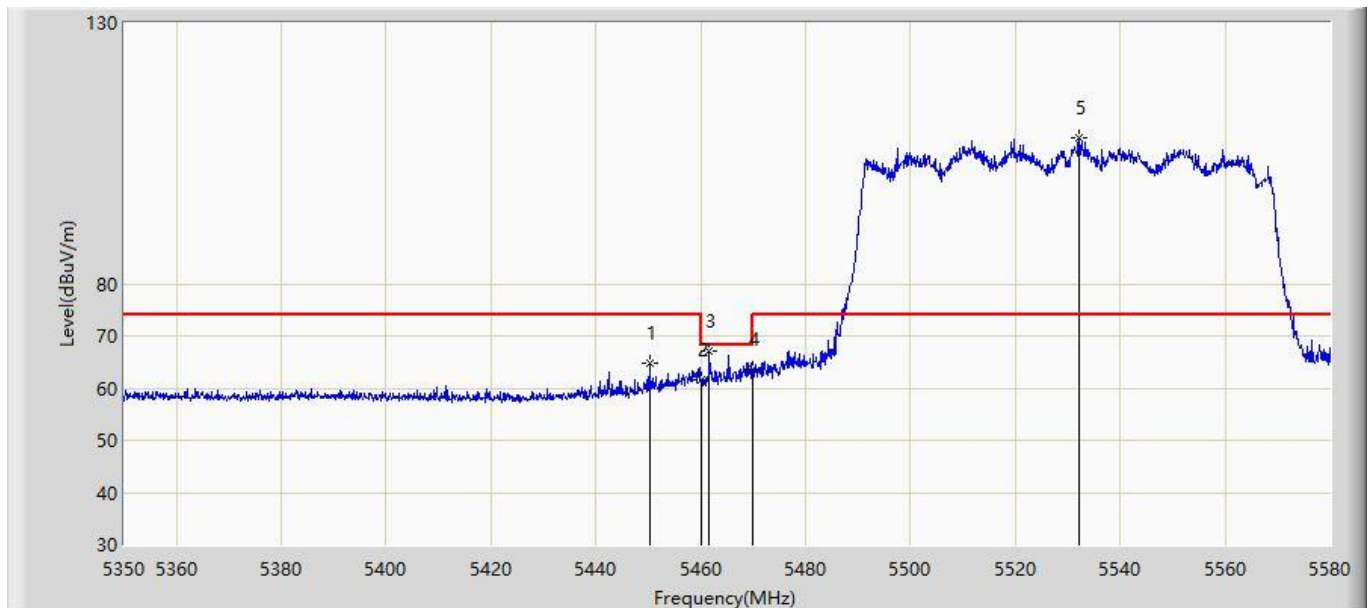


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5450.280	64.754	60.916	-9.246	74.000	3.838	PK
2			5460.000	61.563	57.719	-12.437	74.000	3.844	PK
3			5461.665	67.202	63.357	-0.998	68.200	3.845	PK
4			5470.000	63.603	59.752	-4.597	68.200	3.850	PK
5		*	5532.045	107.999	104.006	N/A	N/A	3.993	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/18 - 17:14
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE80 at channel 5530MHz with OAW-AP1322	

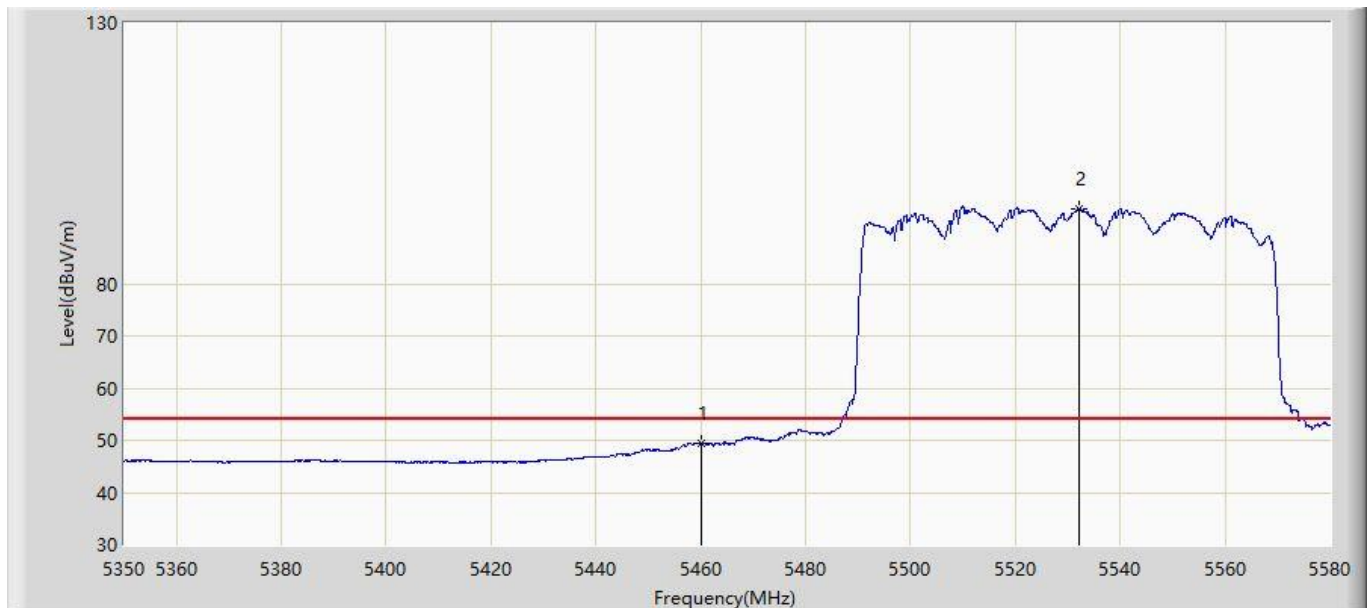


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	49.511	45.667	-4.489	54.000	3.844	AV
2		*	5532.275	94.380	90.386	N/A	N/A	3.994	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/18 - 17:14
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE80 at channel 5530MHz with OAW-AP1322	

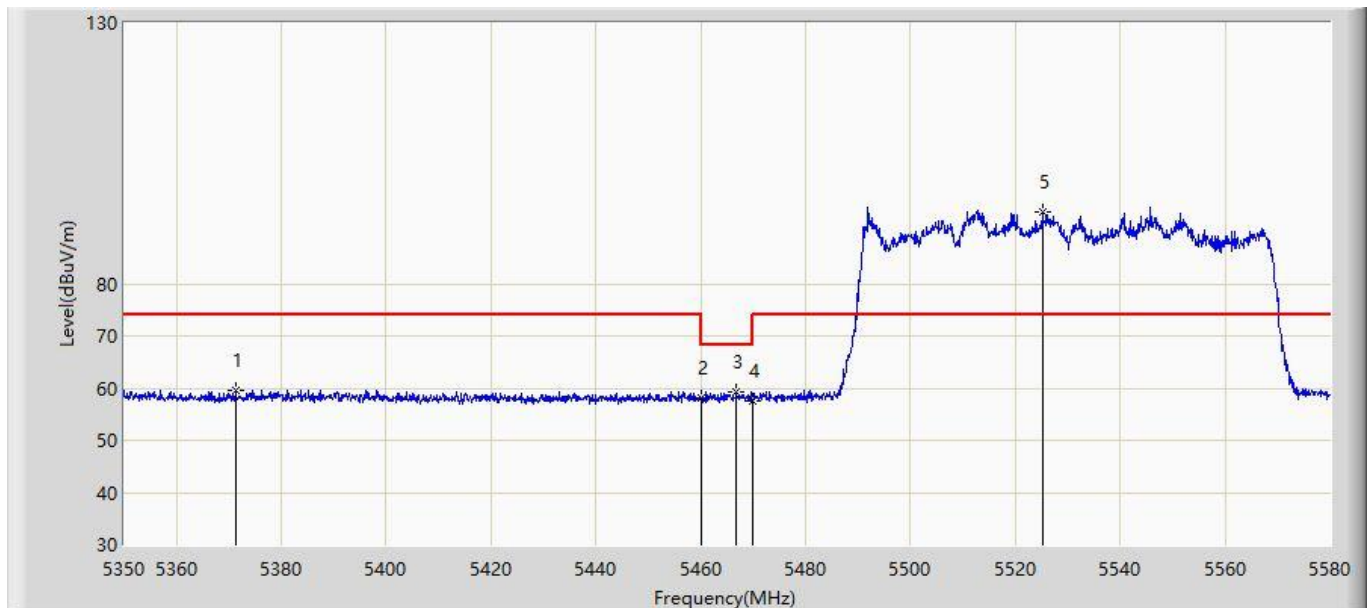


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5371.275	59.676	55.888	-14.324	74.000	3.787	PK
2			5460.000	58.248	54.404	-15.752	74.000	3.844	PK
3			5466.840	59.199	55.351	-9.001	68.200	3.848	PK
4			5470.000	57.676	53.825	-10.524	68.200	3.850	PK
5		*	5525.145	93.853	89.886	N/A	N/A	3.967	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/18 - 17:16
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE80 at channel 5530MHz with OAW-AP1322	

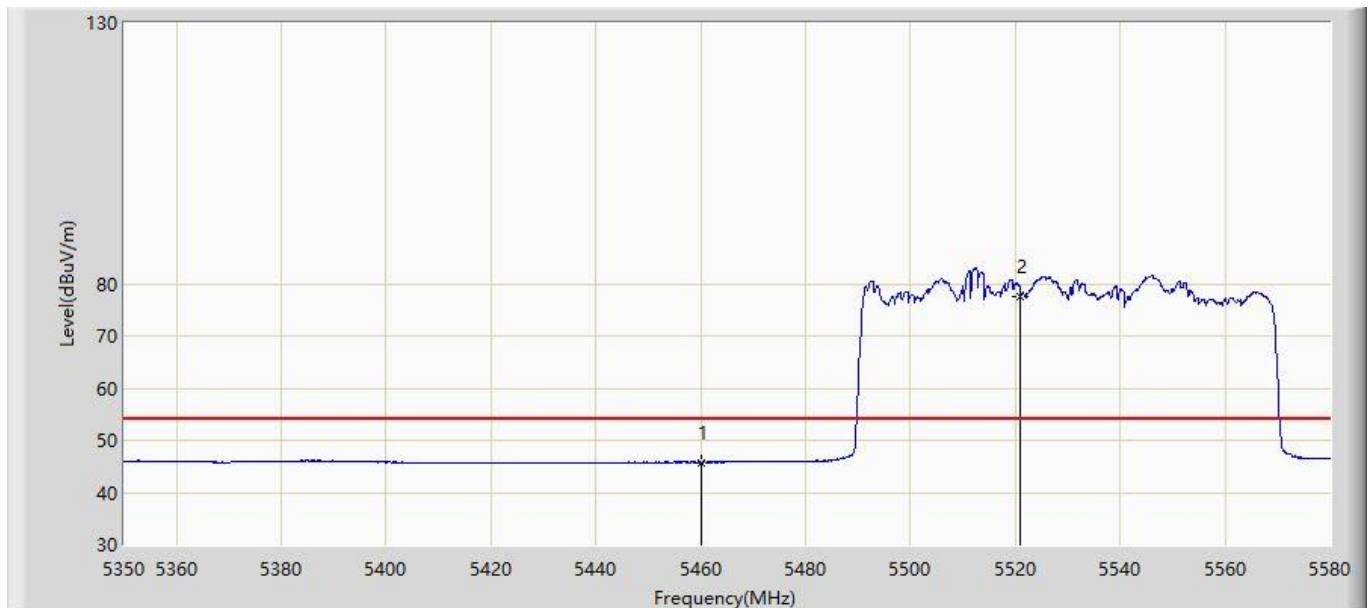


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	45.755	41.911	-8.245	54.000	3.844	AV
2		*	5520.890	77.642	73.692	N/A	N/A	3.951	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/18 - 17:19
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE80 at channel 5610MHz with OAW-AP1322	

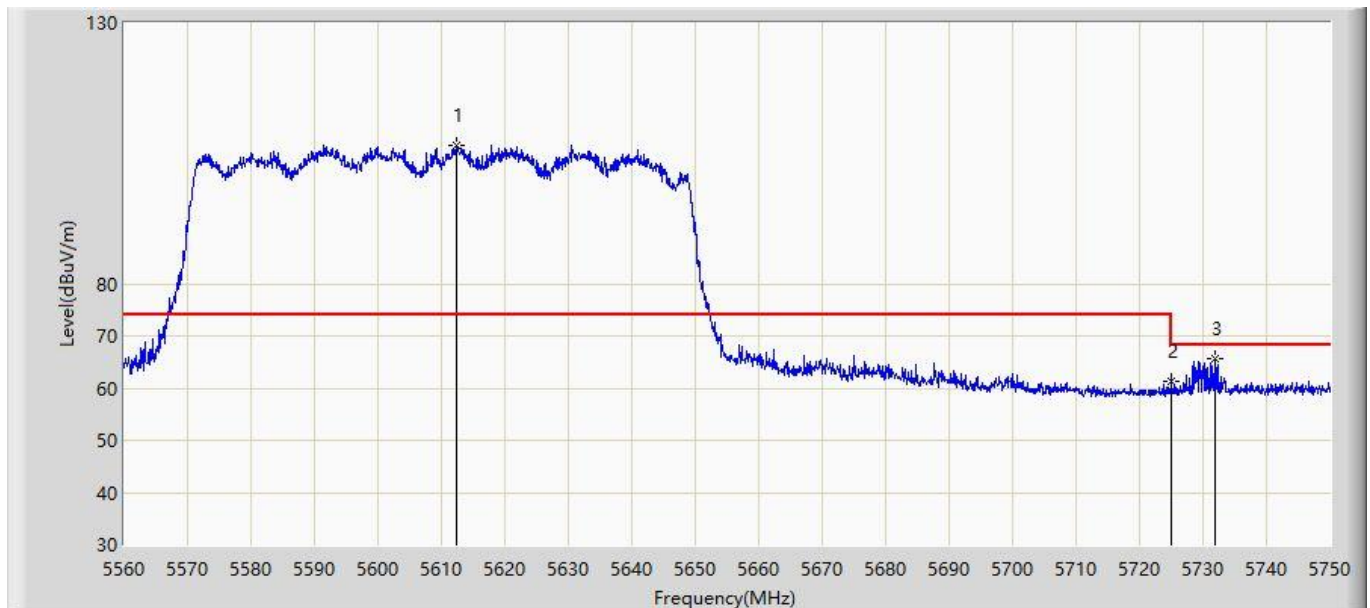


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5612.345	106.611	102.310	N/A	N/A	4.301	PK
2			5725.000	61.350	56.616	-6.850	68.200	4.734	PK
3			5731.855	65.637	60.877	-2.563	68.200	4.760	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/18 - 17:20
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE80 at channel 5610MHz with OAW-AP1322	

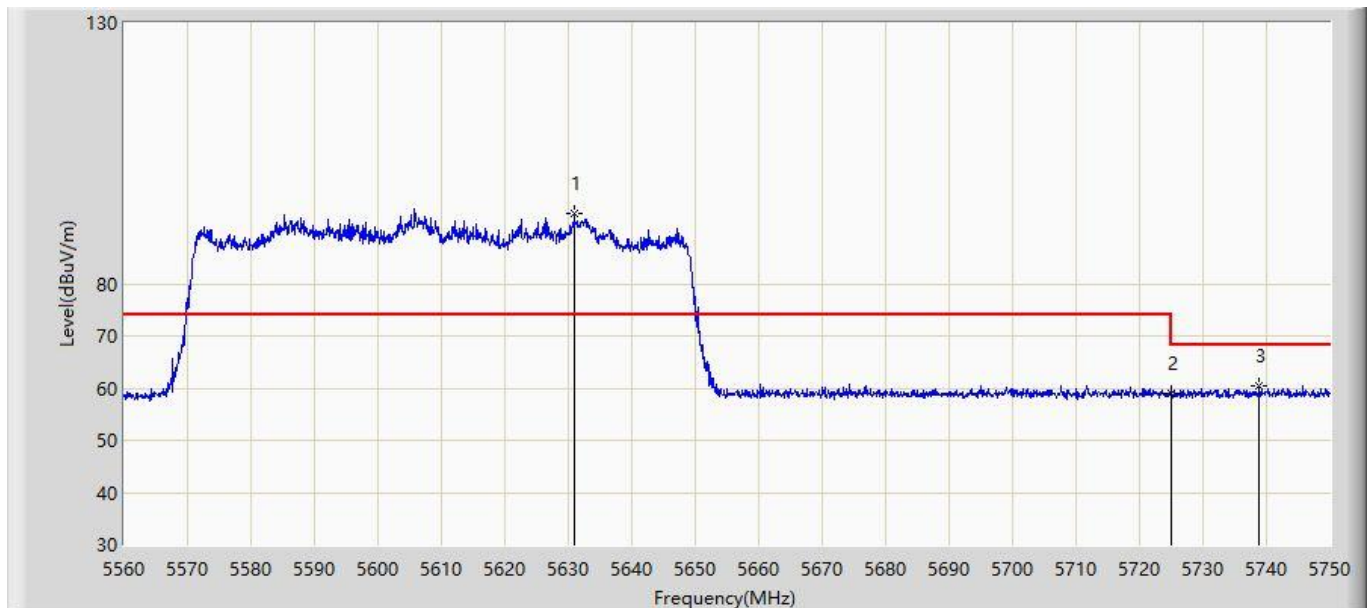


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5630.965	93.553	89.180	N/A	N/A	4.373	PK
2			5725.000	58.878	54.144	-9.322	68.200	4.734	PK
3			5738.790	60.311	55.524	-7.889	68.200	4.787	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/18 - 17:21
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE80 at channel 5775MHz with OAW-AP1322	

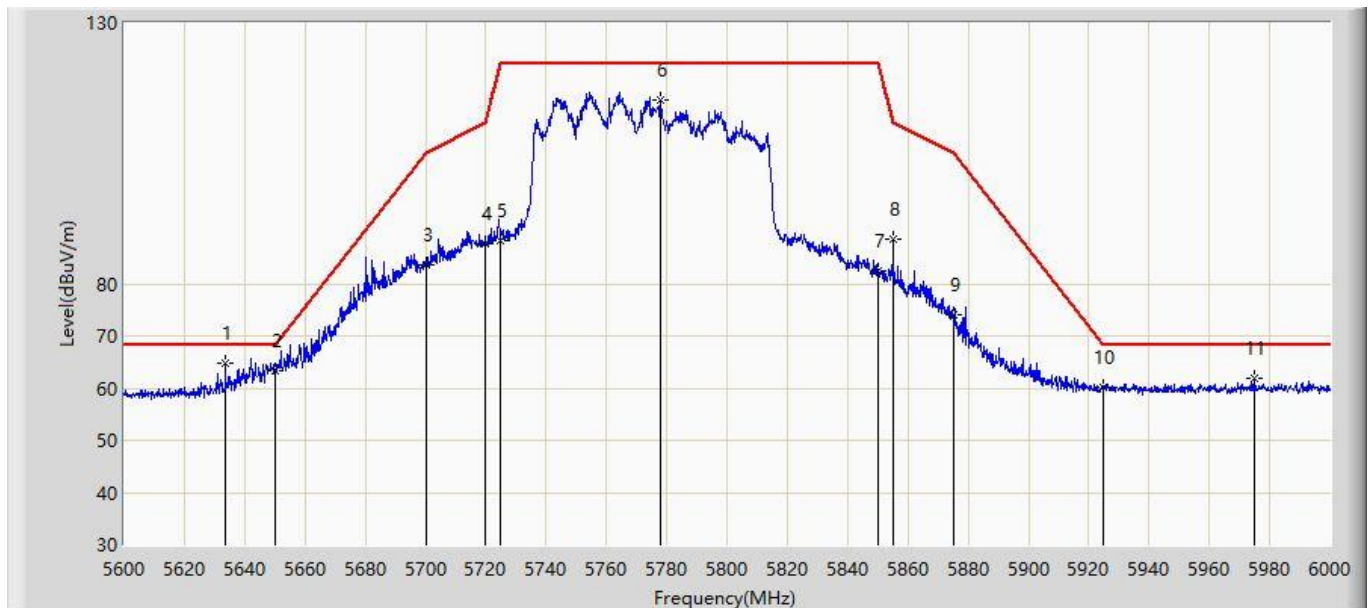


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5633.600	64.716	60.333	-3.484	68.200	4.384	PK
2			5650.000	63.451	59.005	-4.749	68.200	4.446	PK
3			5700.000	83.527	78.889	-21.673	105.200	4.638	PK
4			5720.000	87.782	83.067	-23.018	110.800	4.715	PK
5			5725.000	88.182	83.448	-34.018	122.200	4.734	PK
6			5778.000	115.272	110.334	N/A	N/A	4.938	PK
7			5850.000	82.341	77.127	-39.859	122.200	5.214	PK
8			5855.000	88.550	83.317	-22.250	110.800	5.233	PK
9			5875.000	73.988	68.678	-31.212	105.200	5.310	PK
10			5925.000	60.157	54.655	-8.043	68.200	5.502	PK
11			5975.000	61.894	56.200	-6.306	68.200	5.694	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/18 - 17:24
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE80 at channel 5775MHz with OAW-AP1322	

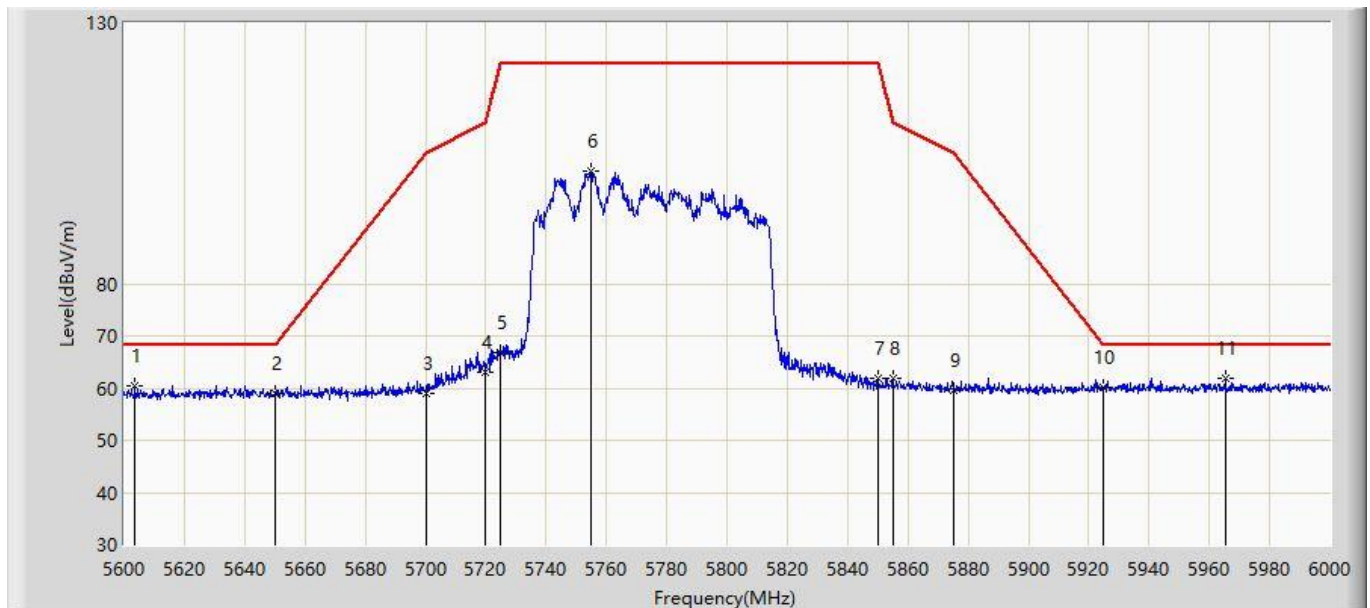


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5603.600	60.401	56.134	-7.799	68.200	4.268	PK
2			5650.000	58.959	54.513	-9.241	68.200	4.446	PK
3			5700.000	58.956	54.318	-46.244	105.200	4.638	PK
4			5720.000	63.088	58.373	-47.712	110.800	4.715	PK
5			5725.000	66.944	62.210	-55.256	122.200	4.734	PK
6			5754.800	101.614	96.766	N/A	N/A	4.849	PK
7			5850.000	61.894	56.680	-60.306	122.200	5.214	PK
8			5855.000	61.912	56.679	-48.888	110.800	5.233	PK
9			5875.000	59.694	54.384	-45.506	105.200	5.310	PK
10			5925.000	60.246	54.744	-7.954	68.200	5.502	PK
11		*	5965.200	61.748	56.091	-6.452	68.200	5.656	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/24 - 14:47
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE80+80 at channel 5210MHz+5290MHz with OAW-AP1322	

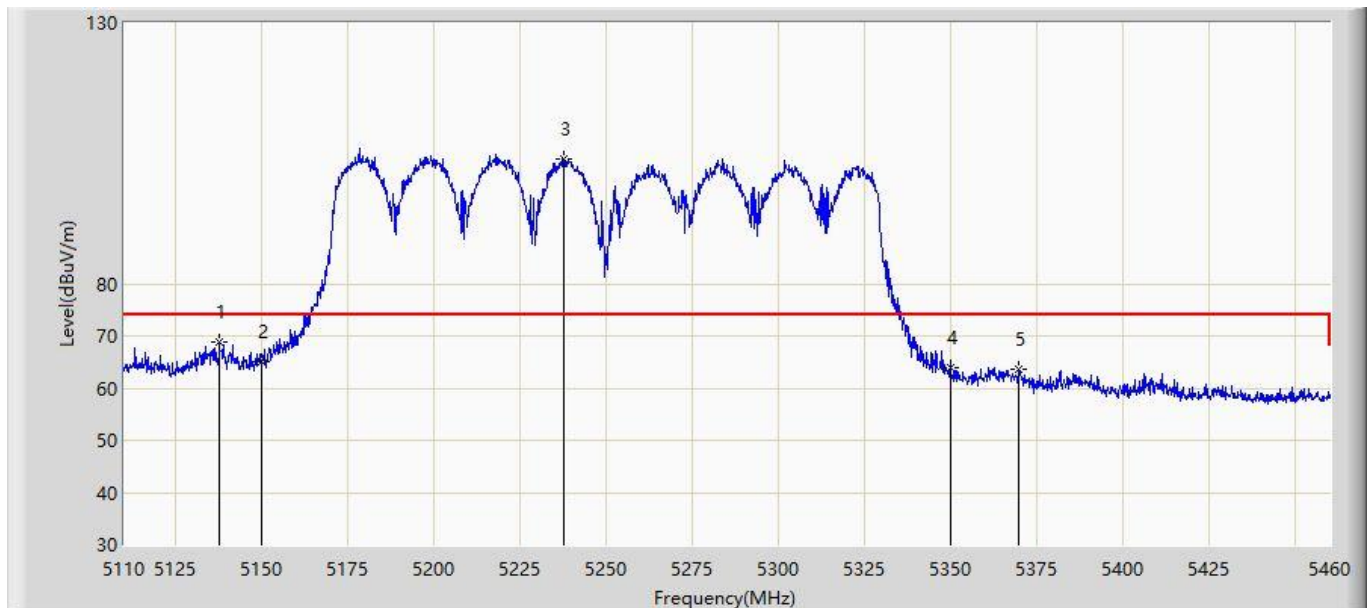


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5137.650	68.838	52.483	-5.162	74.000	16.355	PK
2			5150.000	65.066	48.710	-8.934	74.000	16.356	PK
3		*	5237.750	103.976	87.616	N/A	N/A	16.360	PK
4			5350.000	63.980	47.616	-10.020	74.000	16.364	PK
5			5369.525	63.644	47.279	-10.356	74.000	16.366	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/24 - 14:48
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE80+80 at channel 5210MHz+5290MHz with OAW-AP1322	

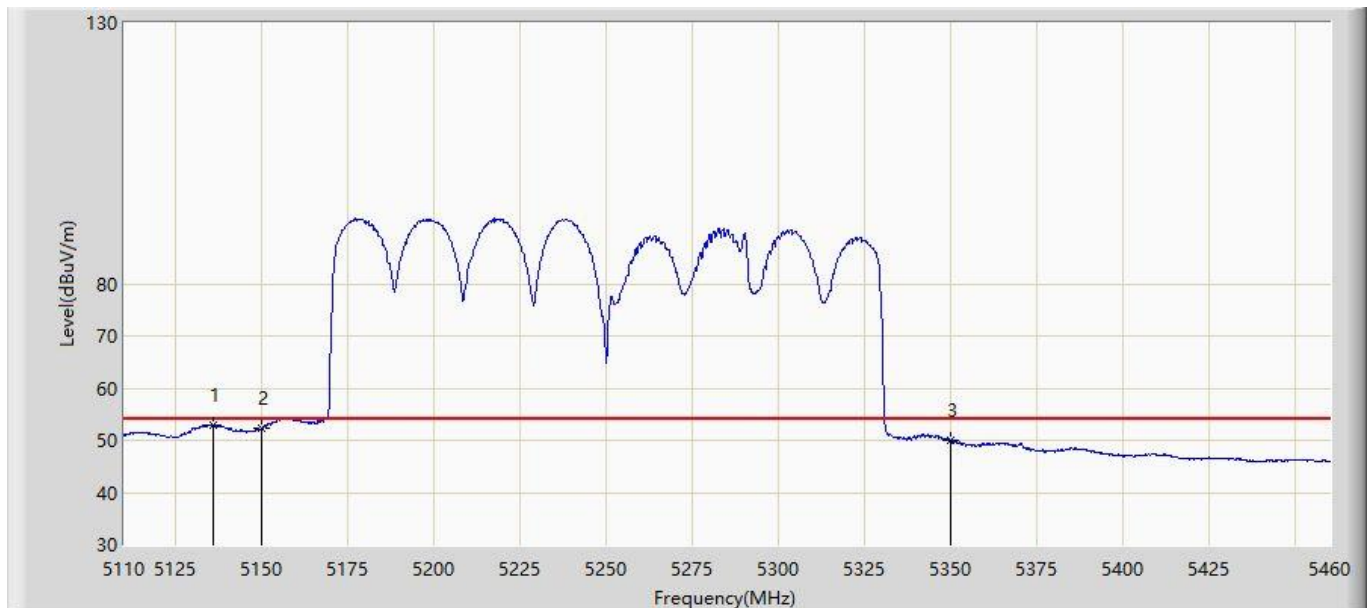


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5135.900	52.986	49.349	-1.014	54.000	3.637	AV
2			5150.000	52.420	48.774	-1.580	54.000	3.646	AV
3			5350.000	49.881	46.107	-4.119	54.000	3.774	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/24 - 14:51
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE80+80 at channel 5210MHz+5290MHz with OAW-AP1322	

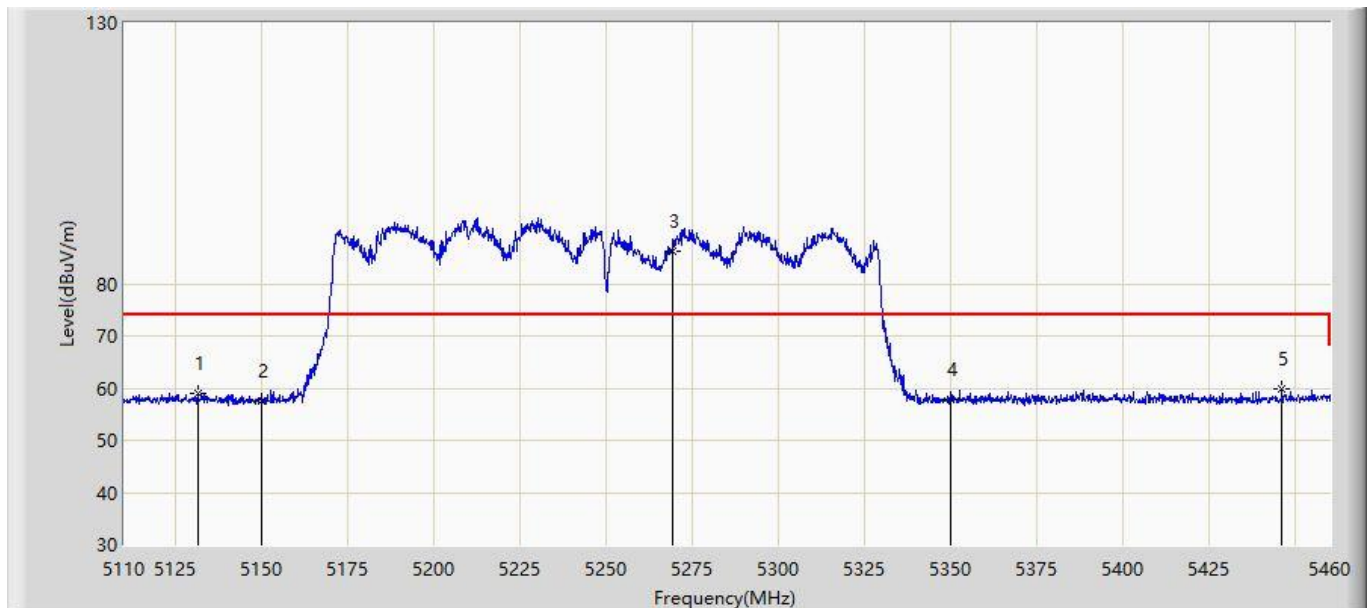


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5131.350	58.999	55.365	-15.001	74.000	3.634	PK
2			5150.000	57.610	53.964	-16.390	74.000	3.646	PK
3		*	5269.250	86.320	82.598	N/A	N/A	3.721	PK
4			5350.000	57.916	54.142	-16.084	74.000	3.774	PK
5			5446.000	59.723	55.888	-14.277	74.000	3.834	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/24 - 14:52
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE80+80 at channel 5210MHz+5290MHz with OAW-AP1322	

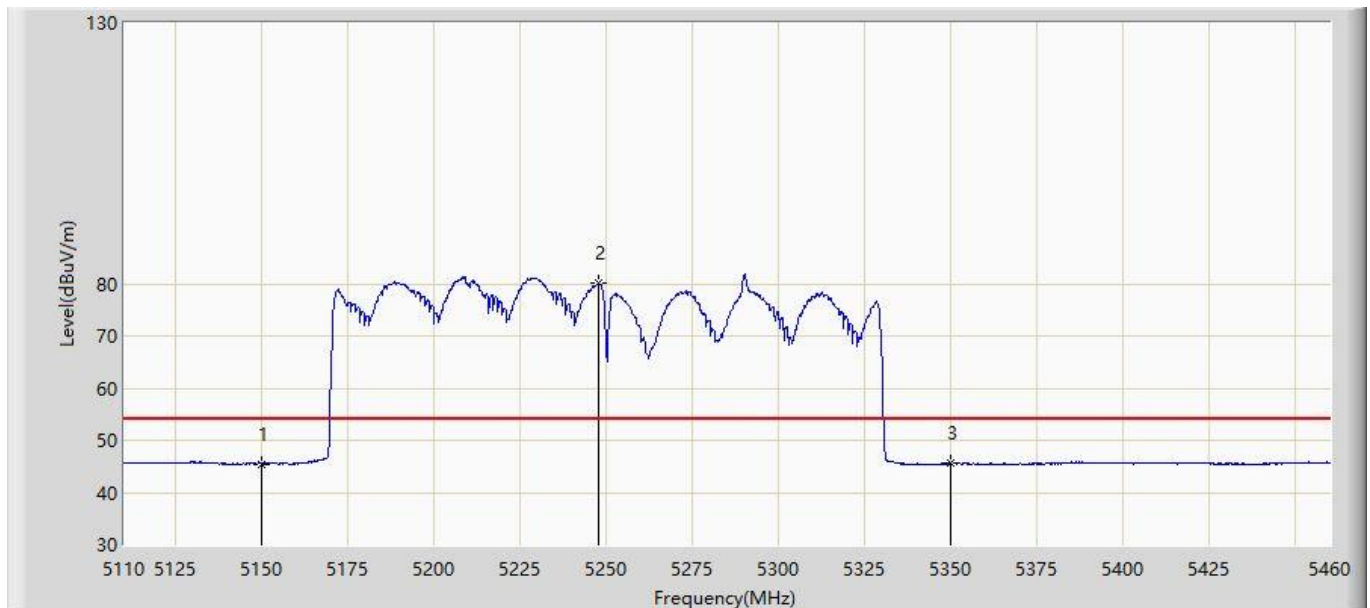


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	45.495	41.849	-8.505	54.000	3.646	AV
2		*	5247.550	80.017	76.308	N/A	N/A	3.709	AV
3			5350.000	45.584	41.810	-8.416	54.000	3.774	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/24 - 14:55
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE80+80 at channel 5530MHz+5610MHz with OAW-AP1322	

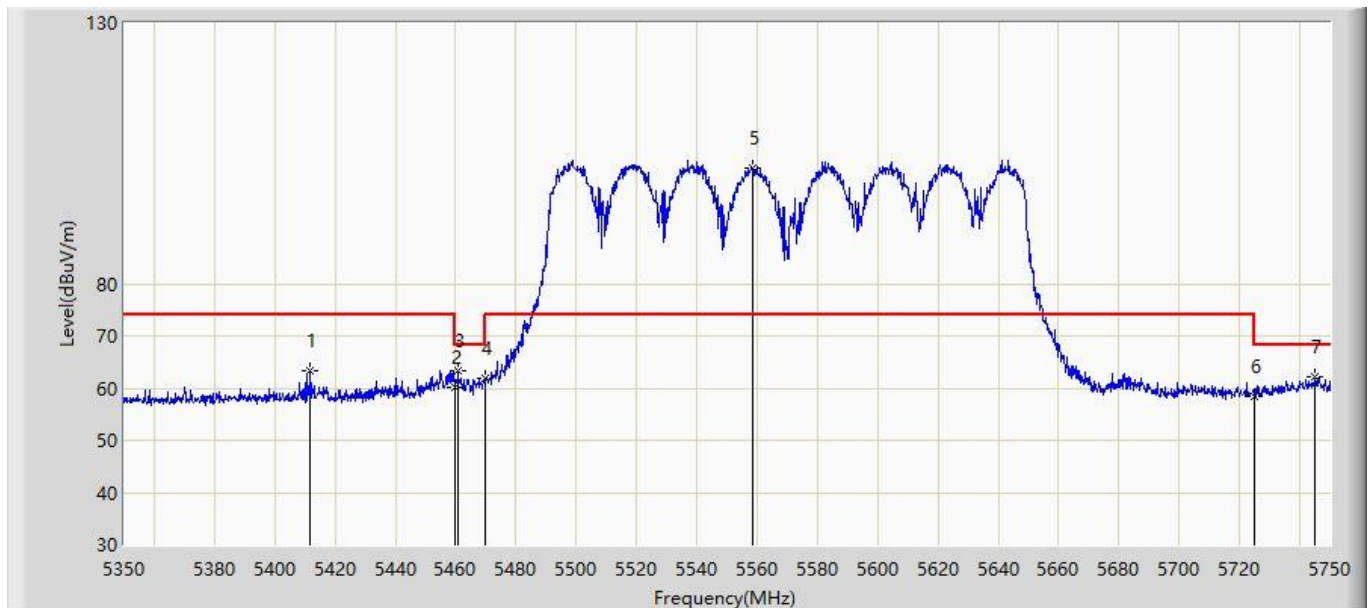


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5411.800	63.212	59.398	-10.788	74.000	3.814	PK
2			5460.000	60.158	56.314	-13.842	74.000	3.844	PK
3			5460.800	63.320	59.476	-4.880	68.200	3.844	PK
4			5470.000	61.960	58.109	-6.240	68.200	3.850	PK
5		*	5558.400	102.318	98.224	N/A	N/A	4.094	PK
6			5725.000	58.371	53.637	-9.829	68.200	4.734	PK
7			5745.200	62.079	57.268	-6.121	68.200	4.812	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/24 - 14:56
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE80+80 at channel 5530MHz+5610MHz with OAW-AP1322	

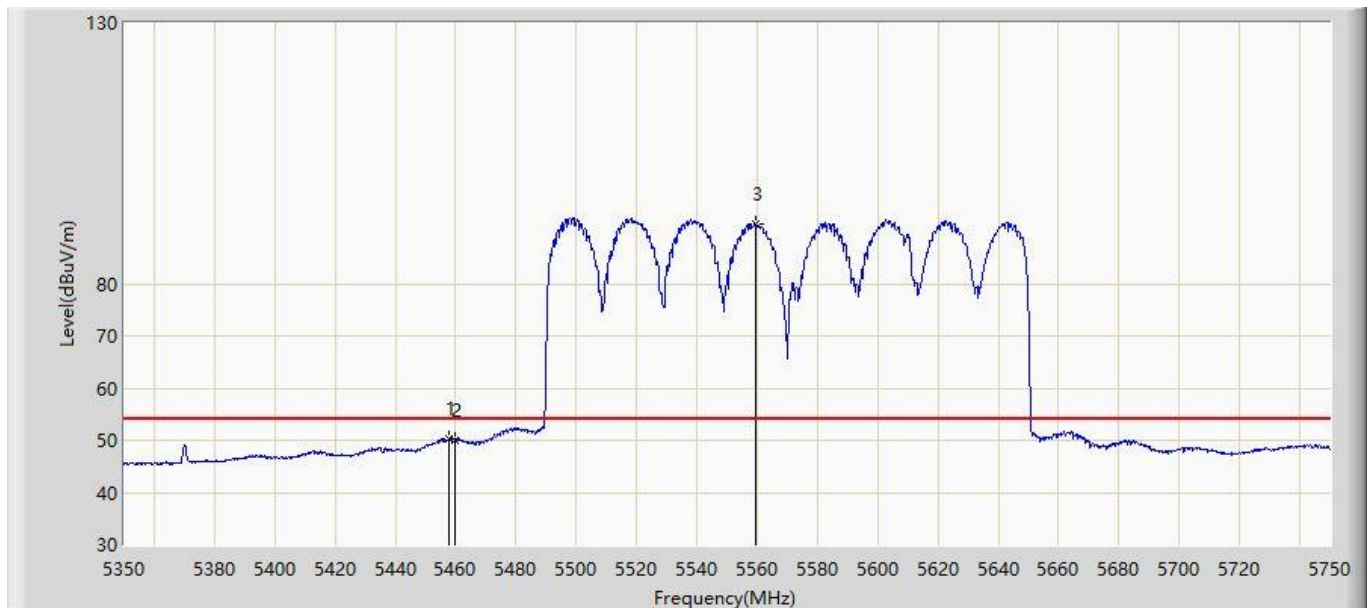


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5457.800	50.334	46.492	-3.666	54.000	3.842	AV
2			5460.000	50.032	46.188	-3.968	54.000	3.844	AV
3		*	5559.400	91.382	87.284	N/A	N/A	4.098	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/24 - 15:00
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE80+80 at channel 5530MHz +5610MHz with OAW-AP1322	

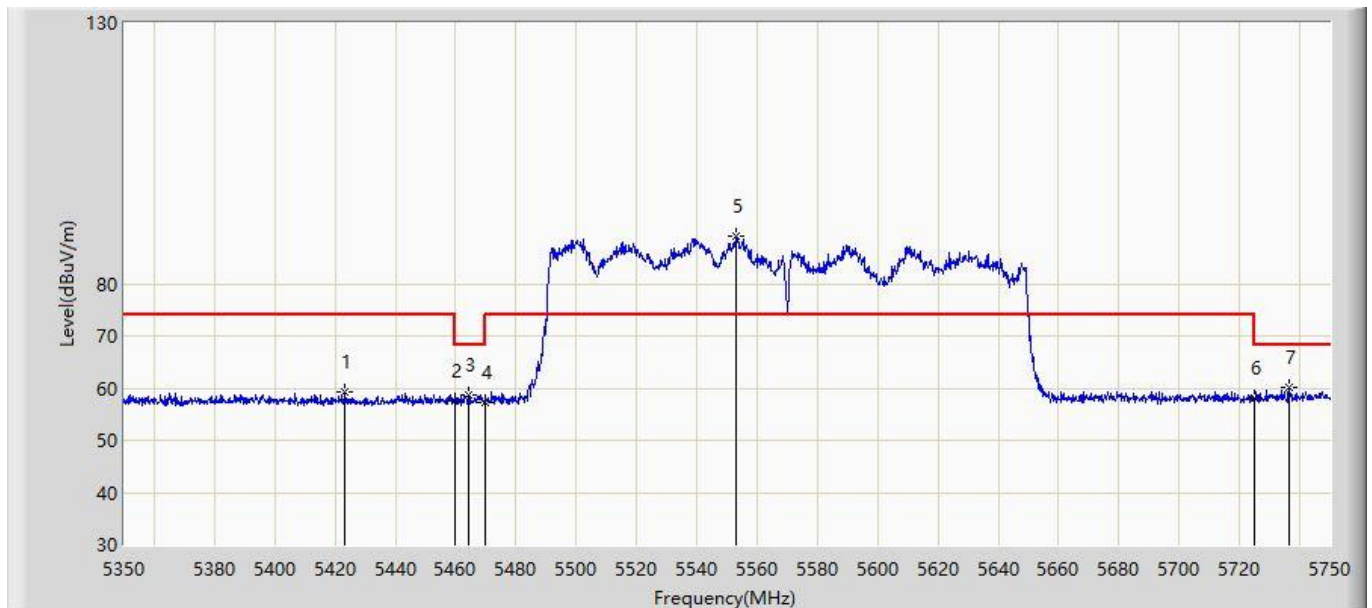


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5423.400	59.310	55.489	-14.690	74.000	3.820	PK
2			5460.000	57.413	53.569	-16.587	74.000	3.844	PK
3			5464.400	58.712	54.865	-9.488	68.200	3.847	PK
4			5470.000	57.391	53.540	-10.809	68.200	3.850	PK
5		*	5552.800	89.258	85.185	N/A	N/A	4.072	PK
6			5725.000	58.231	53.497	-9.969	68.200	4.734	PK
7			5736.600	60.094	55.316	-8.106	68.200	4.778	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/24 - 15:01
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE80+80 at channel 5530MHz+5610MHz with OAW-AP1322	

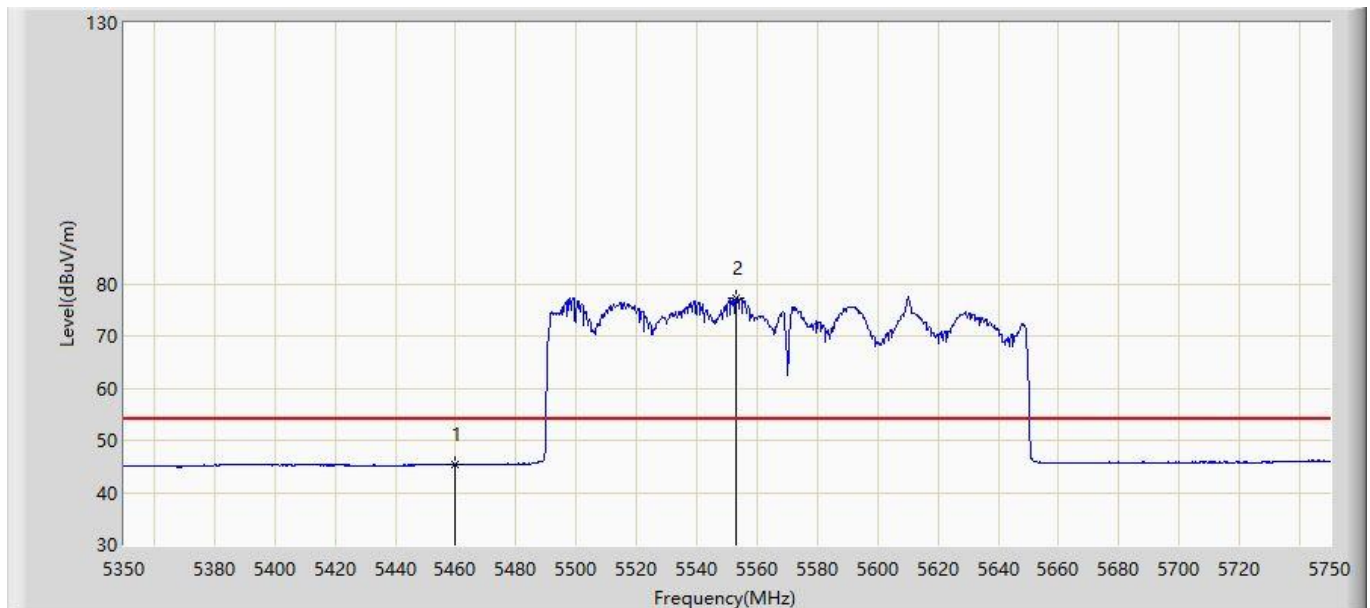

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	45.346	41.502	-8.654	54.000	3.844	AV
2		*	5553.200	77.389	73.315	N/A	N/A	4.075	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

5.8. 不必要之發射

5.8.1. 適用標準

依據國家通訊傳播委員會低功率射頻電機技術規範之第 4.7.3 節：

在 5.725 GHz~5.850 GHz 的頻段操作之發射器：所有頻帶邊緣向外 5MHz 內頻率之發射，有效等向輻射功率(EIRP) ≤ 27 dBm/MHz~15.6 dBm/MHz (以線性法計算對應之限制值)；所有頻帶邊緣向外 5MHz~25MHz，有效等向輻射功率(EIRP) ≤ 15.6 dBm/MHz~10 dBm/MHz (以線性法計算對應之限制值)；所有頻帶邊緣外 25MHz~75MHz，有效等向輻射功率(EIRP) ≤ 10 dBm/MHz~-27 dBm/MHz (以線性法計算對應之限制值)；所有頻帶邊緣外 ≥ 75 MHz 的頻率之發射，有效等向輻射功率(EIRP) ≤ -27 dBm/MHz；

測量不必要發射時，應使用之最低解析頻寬為 1 MHz。必要時，於頻帶邊緣附近可使用小於 1 MHz 之解析頻寬，並以補償方式計算其總值。

當測量不必要發射之限制值時，應將待測物的載波頻率調整到儘可能接近設備設計所允許的上、下頻帶邊緣。

在 1 GHz 以下不必要之發射，應符合 2.8 之規定，任何使用市電為供應電源之設備亦須符合 2.3 之電源線傳導限制值。


不必要發射頻率屬 2.7 規定頻段者，應符合 2.8 之規定。

5.8.2. 量測方法


低頻待測物置於高 80 公分之非導體桌面（落地型產品置於地上），高頻待測物置於高 150 公分之非導體桌面，受測物與配件設備之電源線無須束綁，桌面上受測設備的所有電源線由桌子的後緣垂下沿旋轉桌表面接至交流插座。落地型設備的交流電源線可以方便的型態走線。桌面可 360 度旋轉，接收天線置於距待測物 3m 距離，高度可在 1 至 4 公尺間變動，以量測待測物之最大輻射電場強度。接收天線並應於水準及垂直極化方向各量測一次。

5.8.3. 測試架構圖

Below 1GHz Test Setup:

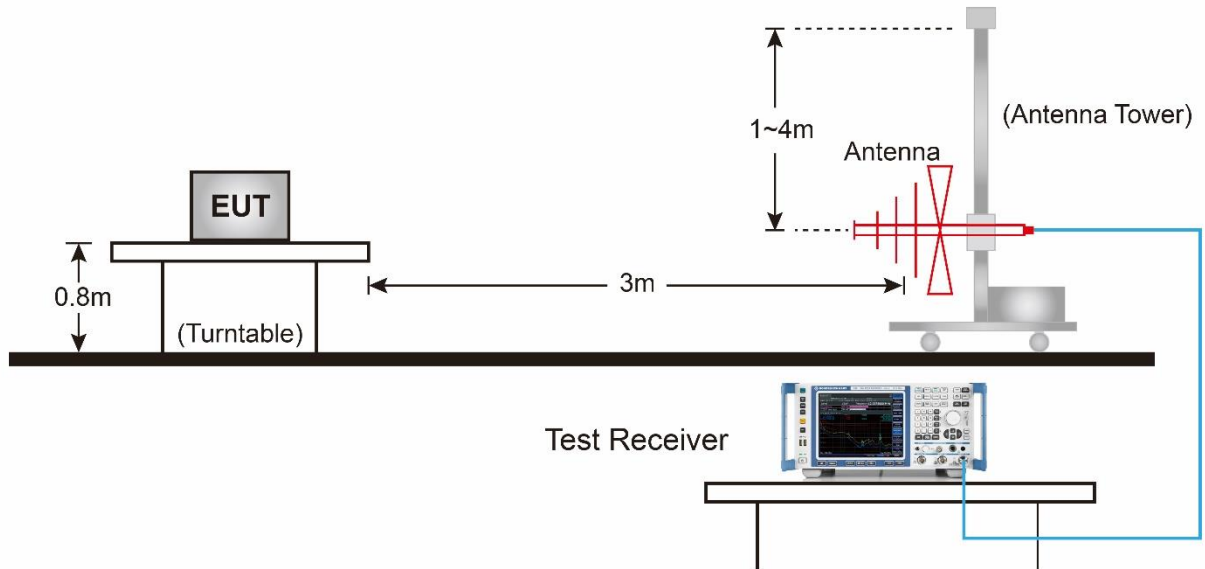


Above 1GHz Test Setup:

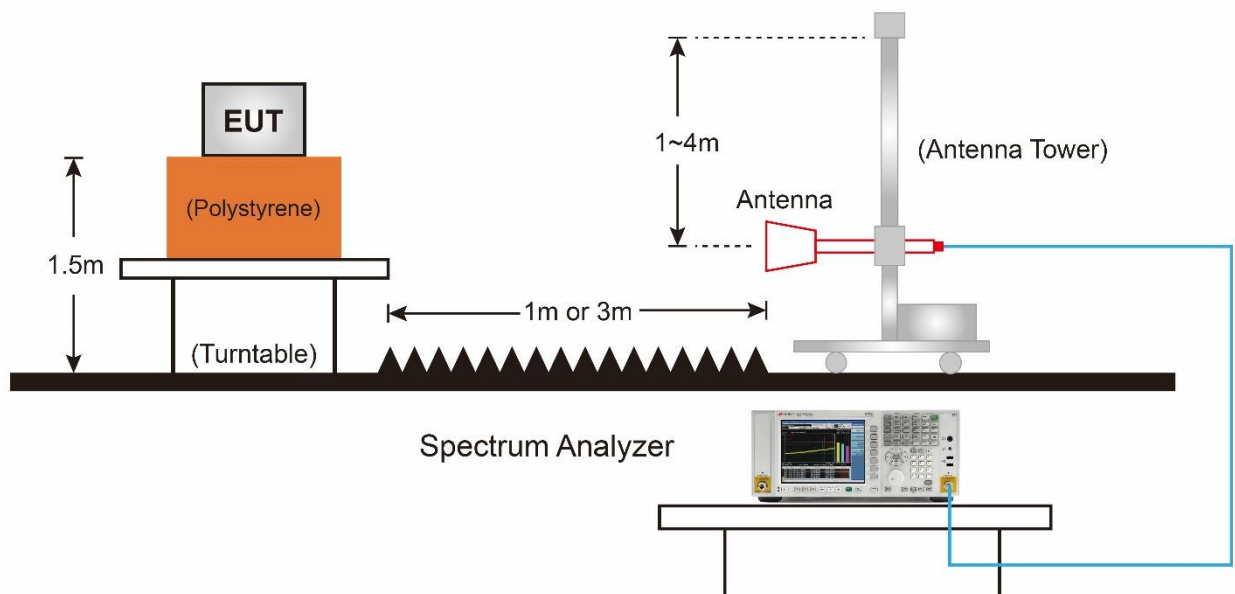

5.8.4. 不必要之發射測試結果

無線基地台-OAW-AP1321-CDD Mode

Site: AC1	Time: 2020/04/21 - 17:16
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11a at Channel 5180MHz with OAW-AP1321	

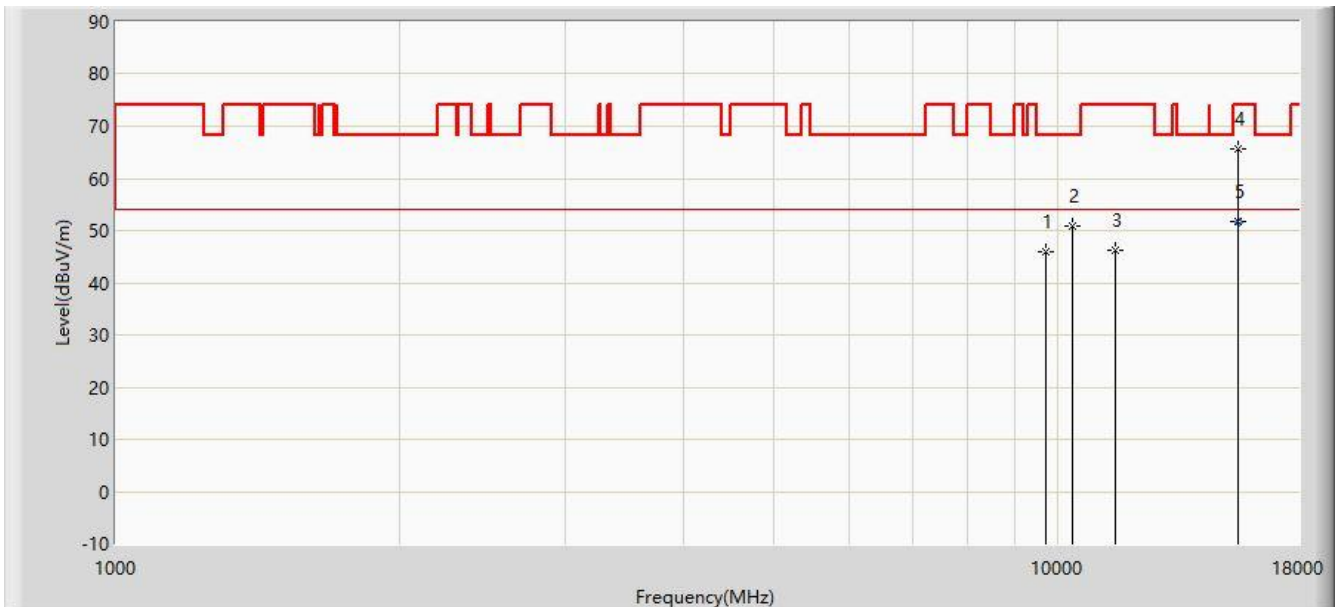


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			9721.000	45.808	31.463	-22.392	68.200	14.345	PK
2			10350.000	50.857	34.470	-17.343	68.200	16.387	PK
3			11489.000	46.152	28.112	-27.848	74.000	18.040	PK
4			15535.000	65.544	44.625	-8.456	74.000	20.919	PK
5		*	15537.300	51.755	30.838	-2.245	54.000	20.917	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/21 - 17:16
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11a at Channel 5180MHz with OAW-AP1321	

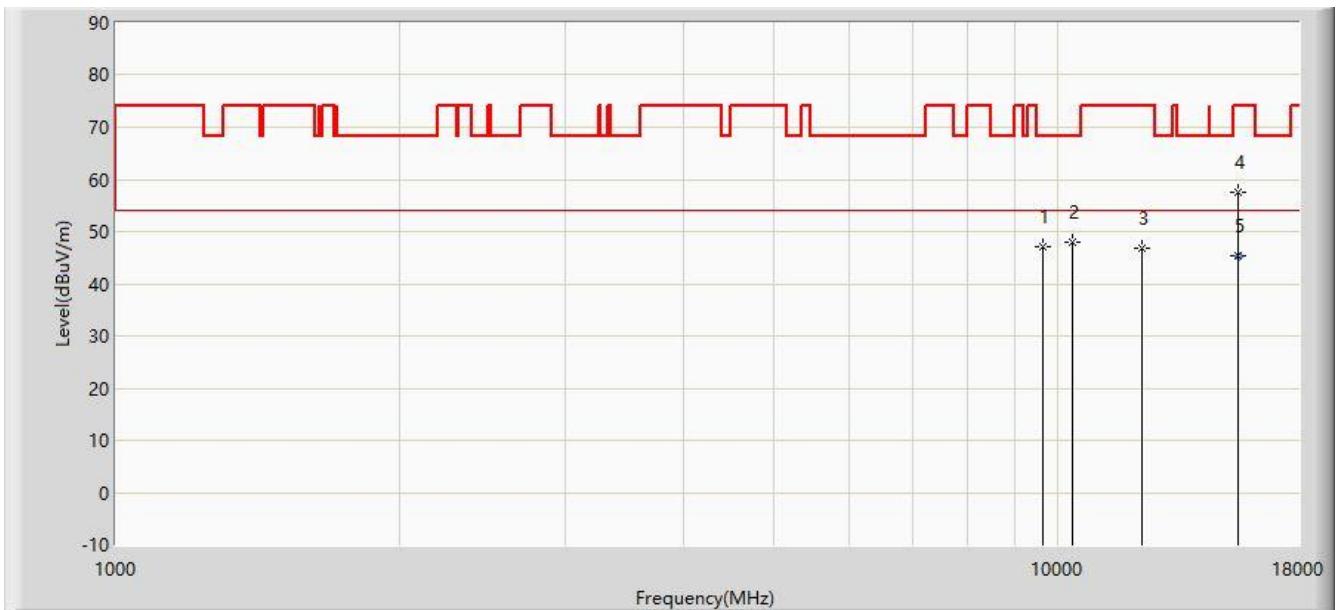


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			9644.500	47.236	33.142	-20.964	68.200	14.094	PK
2			10358.500	47.871	31.457	-20.329	68.200	16.414	PK
3			12288.000	46.702	28.891	-27.298	74.000	17.811	PK
4			15535.000	57.426	36.507	-16.574	74.000	20.919	PK
5		*	15536.900	45.385	24.468	-8.615	54.000	20.918	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/21 - 17:16
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11a at Channel 5220MHz with OAW-AP1321	

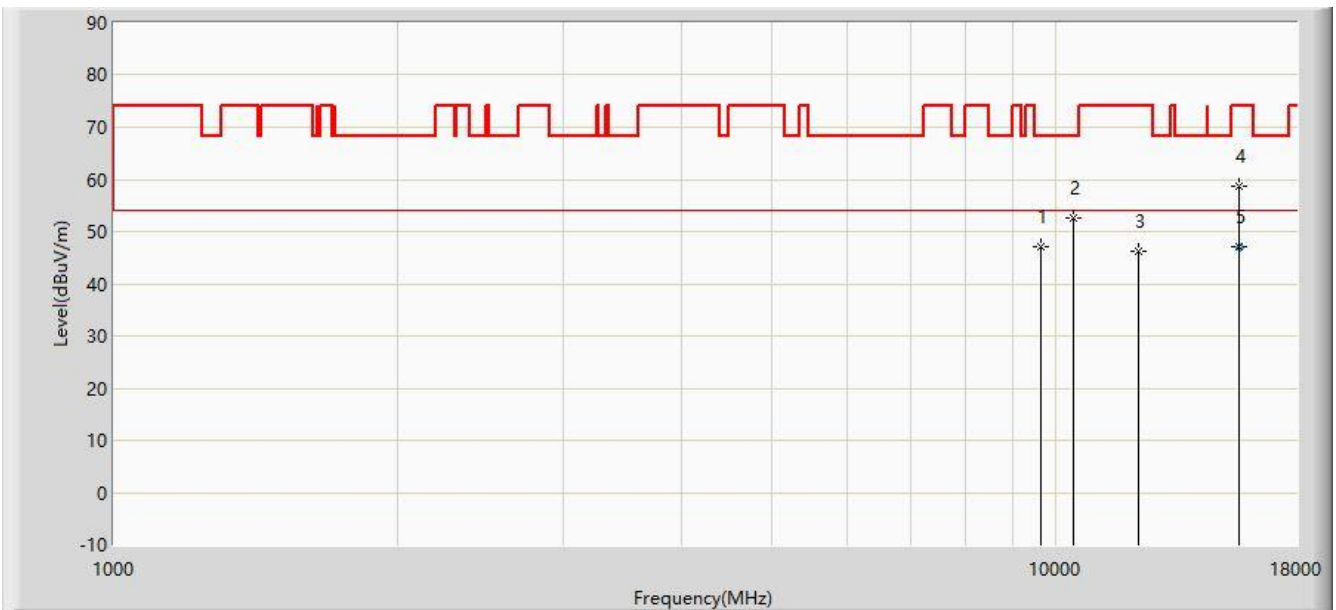


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			9644.500	47.183	33.089	-21.017	68.200	14.094	PK
2			10435.000	52.713	36.052	-15.487	68.200	16.661	PK
3			12228.500	46.149	28.335	-27.851	74.000	17.814	PK
4			15654.000	58.782	37.967	-15.218	74.000	20.815	PK
5		*	15657.250	47.124	26.312	-6.876	54.000	20.812	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/21 - 17:16
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11a at Channel 5220MHz with OAW-AP1321	

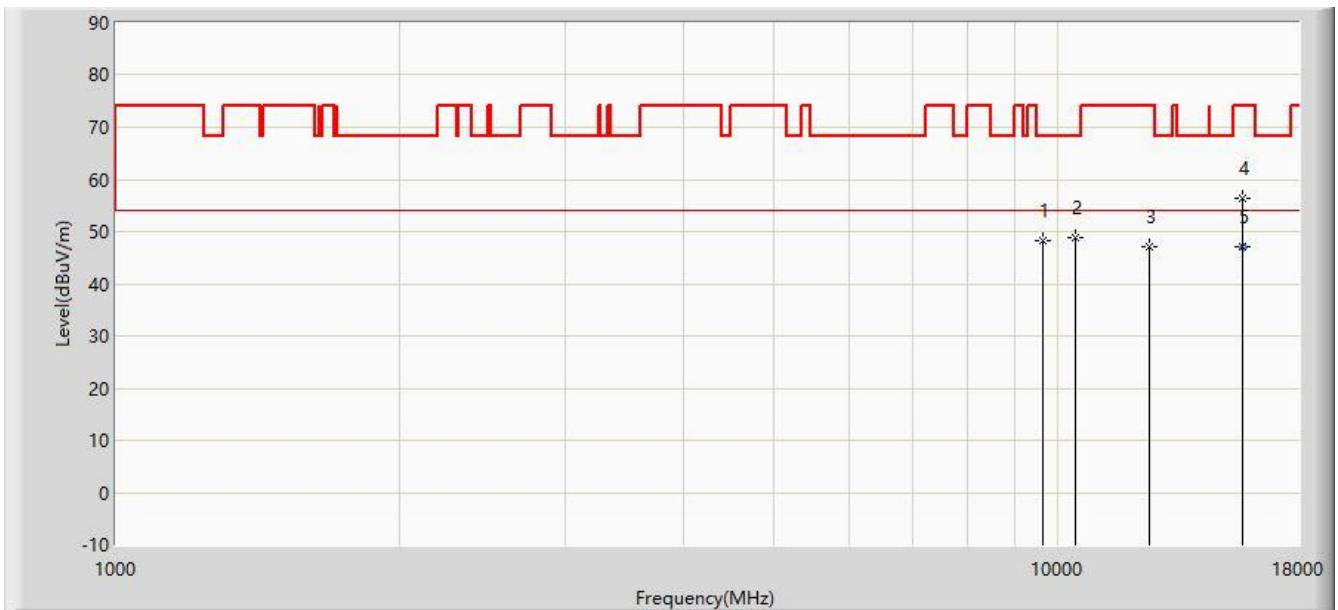


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			9644.500	48.352	34.258	-19.848	68.200	14.094	PK
2			10443.500	48.715	32.027	-19.485	68.200	16.688	PK
3			12492.000	47.068	29.263	-26.932	74.000	17.805	PK
4			15671.000	56.361	35.562	-17.639	74.000	20.799	PK
5		*	15672.000	47.028	26.229	-6.972	54.000	20.798	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/21 - 17:16
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11a at Channel 5240MHz with OAW-AP1321	

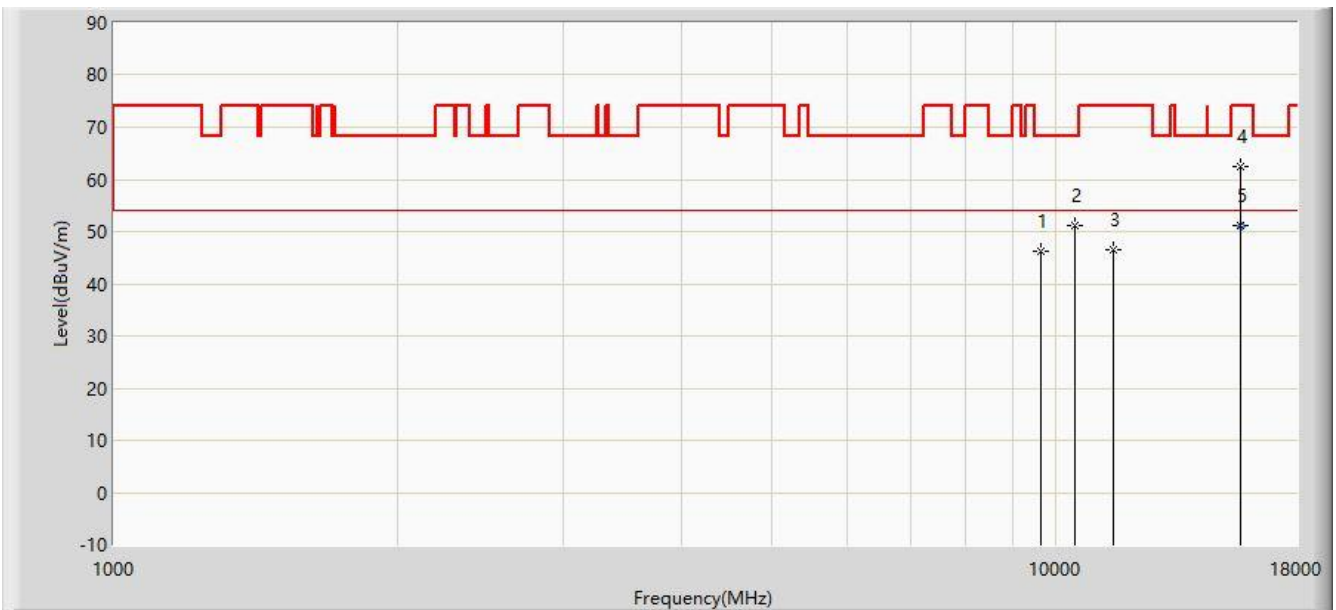


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			9644.500	46.223	32.129	-21.977	68.200	14.094	PK
2			10477.500	51.149	34.352	-17.051	68.200	16.797	PK
3			11497.500	46.446	28.403	-27.554	74.000	18.043	PK
4			15713.500	62.492	41.730	-11.508	74.000	20.762	PK
5		*	15715.100	51.229	30.468	-2.771	54.000	20.761	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/21 - 17:17
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11a at Channel 5240MHz with OAW-AP1321	

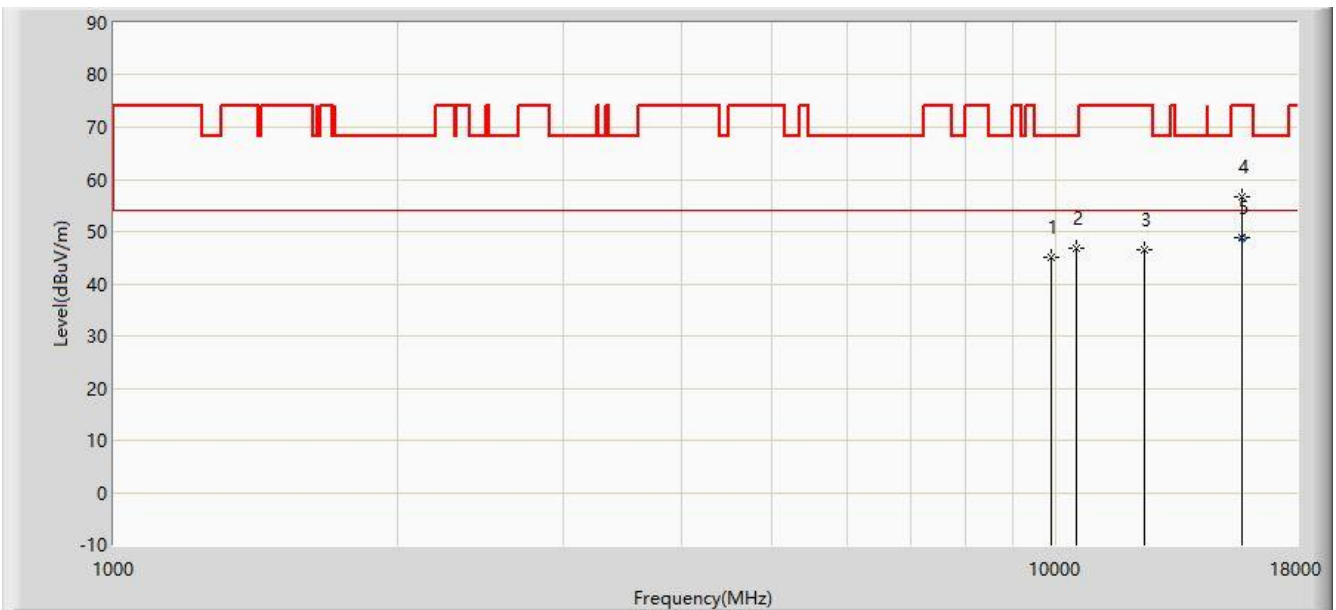


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			9891.000	45.147	30.245	-23.053	68.200	14.902	PK
2			10494.500	46.744	29.895	-21.456	68.200	16.849	PK
3			12407.000	46.397	28.589	-27.603	74.000	17.808	PK
4			15722.000	56.716	35.962	-17.284	74.000	20.754	PK
5		*	15723.300	48.807	28.054	-5.193	54.000	20.753	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/21 - 17:17
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11a at Channel 5260MHz with OAW-AP1321	

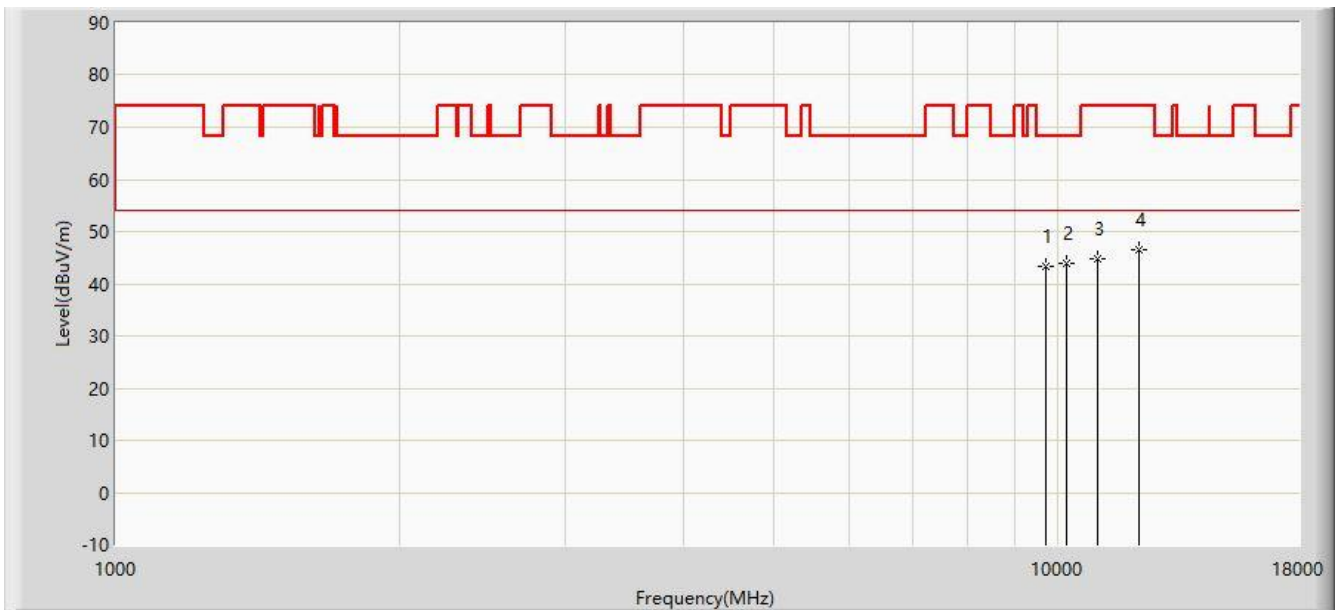


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			9721.000	43.447	29.102	-24.753	68.200	14.345	PK
2		*	10214.000	43.802	27.853	-24.398	68.200	15.949	PK
3			11013.000	44.879	27.287	-29.121	74.000	17.592	PK
4			12169.000	46.646	28.830	-27.354	74.000	17.816	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/21 - 17:17
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11a at Channel 5260MHz with OAW-AP1321	

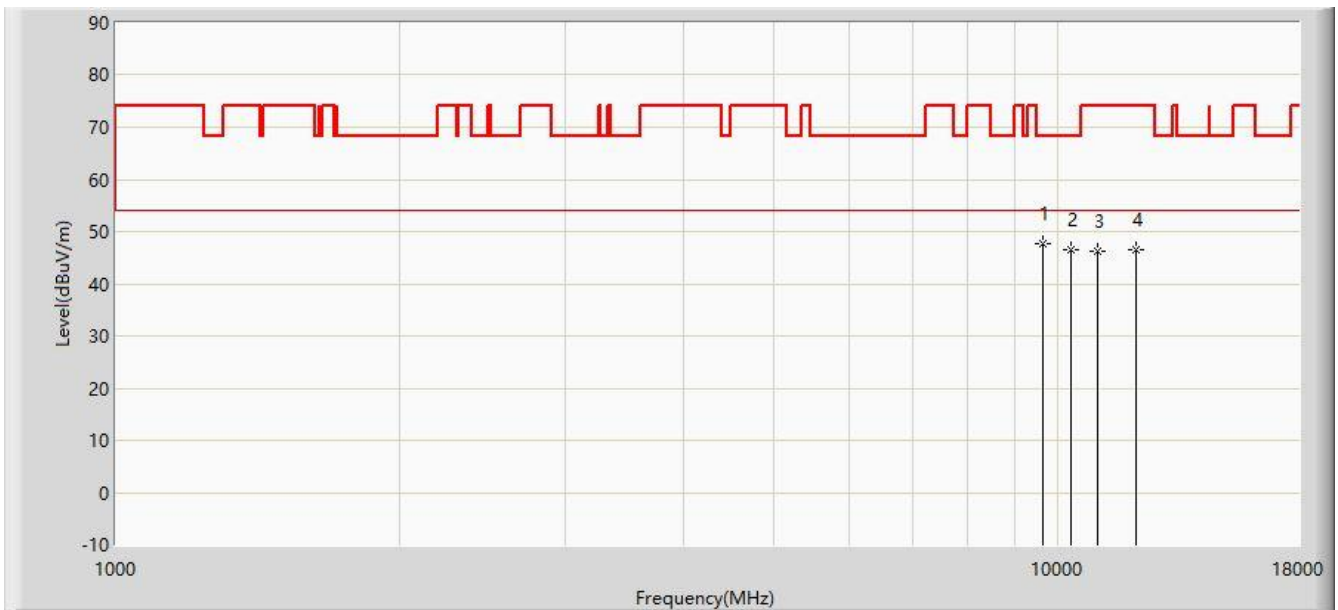


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	9644.500	47.824	33.730	-20.376	68.200	14.094	PK
2			10316.000	46.512	30.234	-21.688	68.200	16.278	PK
3			11030.000	46.287	28.679	-27.713	74.000	17.608	PK
4			12075.500	46.454	28.636	-27.546	74.000	17.818	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/21 - 17:17
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11a at Channel 5300MHz with OAW-AP1321	

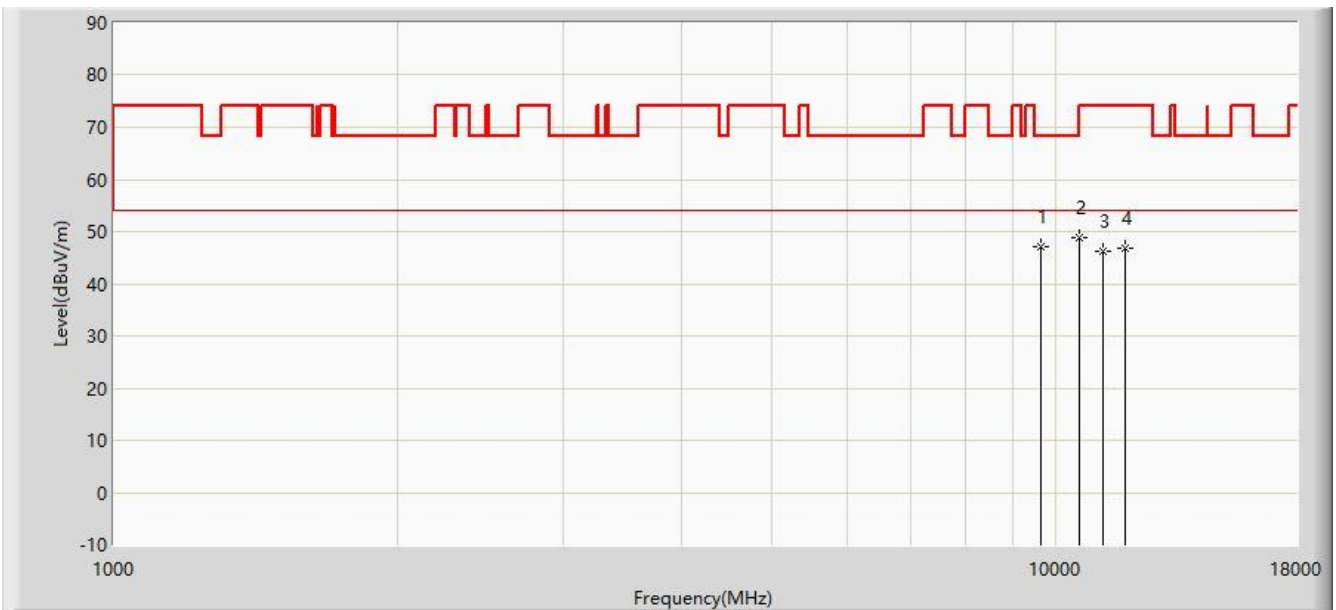


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			9644.500	47.052	32.958	-21.148	68.200	14.094	PK
2		*	10596.500	48.962	31.955	-19.238	68.200	17.007	PK
3			11225.500	46.199	28.407	-27.801	74.000	17.792	PK
4			11854.500	46.711	28.824	-27.289	74.000	17.886	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/21 - 17:17
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11a at Channel 5300MHz with OAW-AP1321	

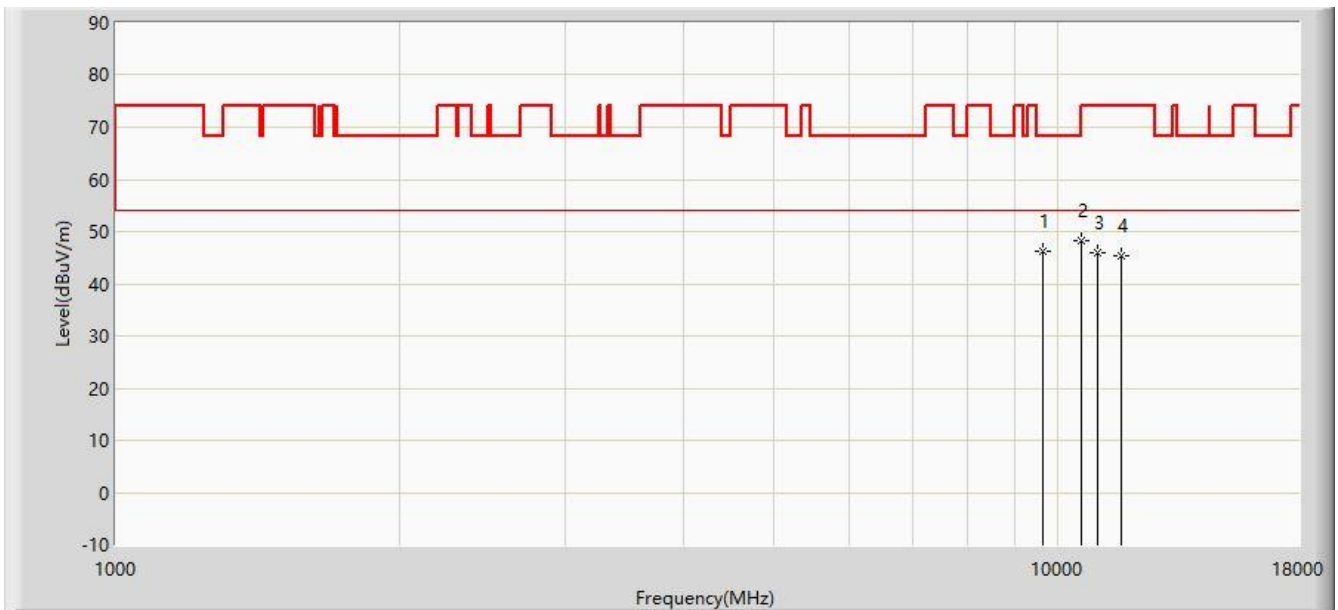


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			9644.500	46.336	32.242	-21.864	68.200	14.094	PK
2		*	10596.500	48.261	31.254	-19.939	68.200	17.007	PK
3			11013.000	46.067	28.475	-27.933	74.000	17.592	PK
4			11684.500	45.401	27.436	-28.599	74.000	17.964	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/21 - 17:17
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11a at Channel 5320MHz with OAW-AP1321	

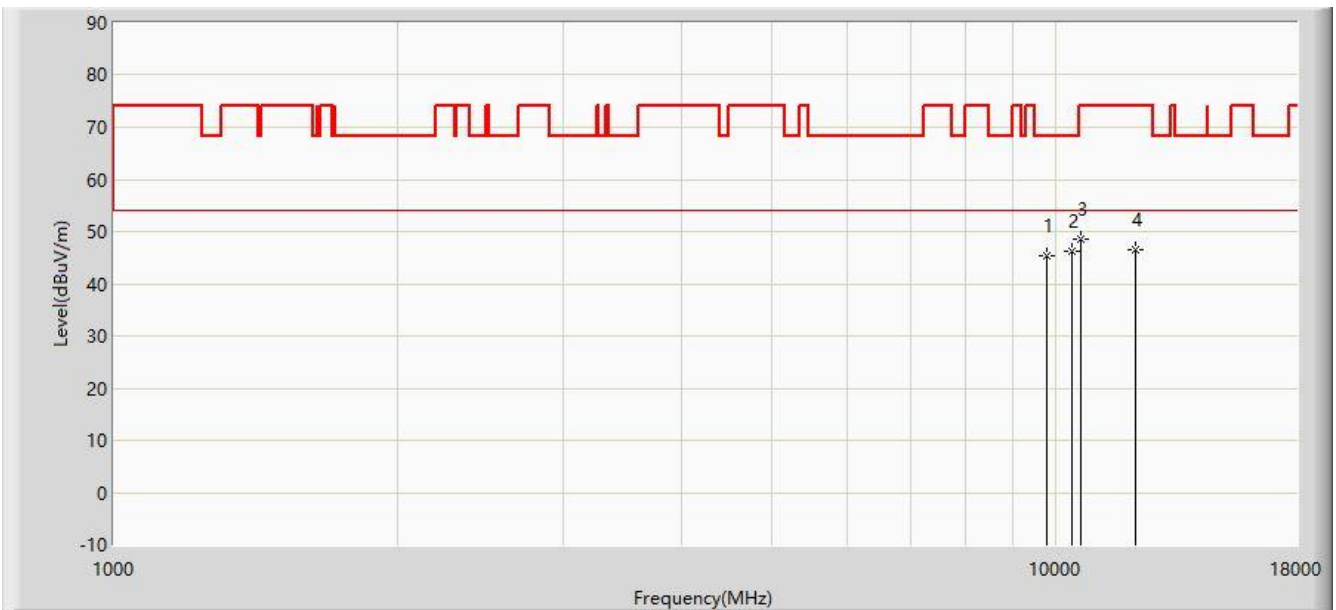


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			9772.000	45.335	30.823	-22.865	68.200	14.512	PK
2		*	10401.000	46.246	29.695	-21.954	68.200	16.551	PK
3			10639.000	48.584	31.516	-25.416	74.000	17.068	PK
4			12135.000	46.378	28.562	-27.622	74.000	17.816	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/21 - 17:17
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11a at Channel 5320MHz with OAW-AP1321	

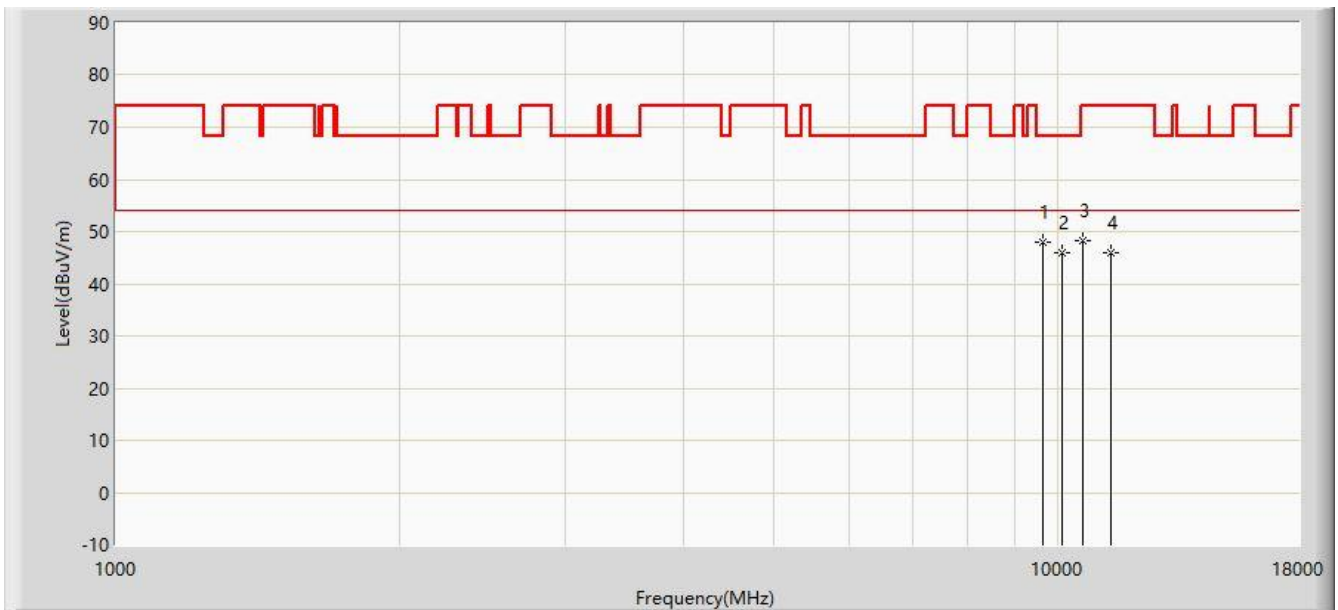


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	9644.500	47.965	33.871	-20.235	68.200	14.094	PK
2			10103.500	45.828	30.235	-22.372	68.200	15.593	PK
3			10639.000	48.179	31.111	-25.821	74.000	17.068	PK
4			11378.500	45.945	28.009	-28.055	74.000	17.936	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/21 - 17:17
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11a at Channel 5500MHz with OAW-AP1321	

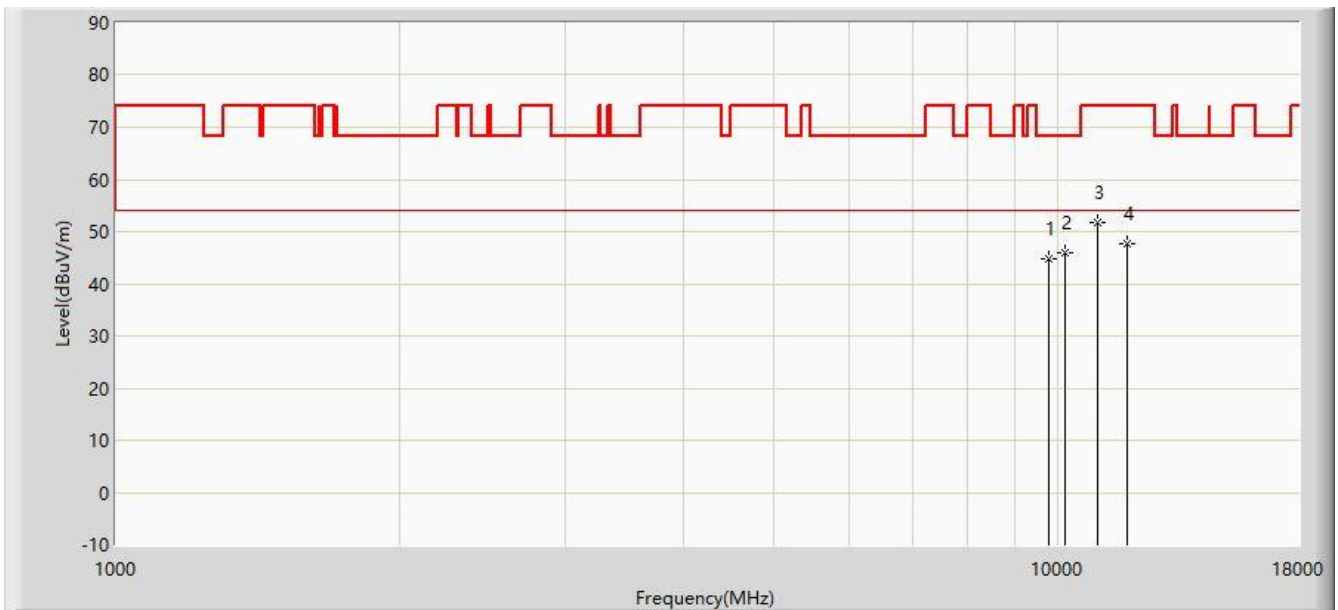


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			9772.000	44.687	30.175	-23.513	68.200	14.512	PK
2		*	10163.000	45.822	30.037	-22.378	68.200	15.785	PK
3			10996.000	51.600	34.025	-22.400	74.000	17.575	PK
4			11820.500	47.651	29.749	-26.349	74.000	17.903	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/21 - 17:18
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11a at Channel 5500MHz with OAW-AP1321	

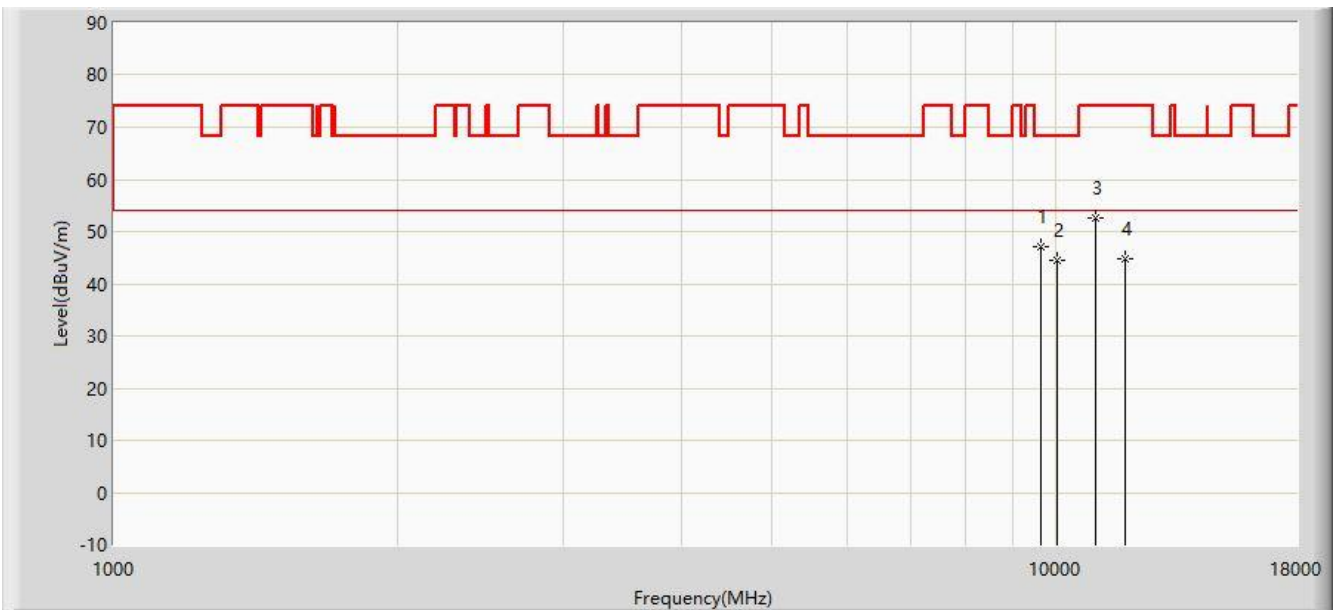


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	9644.500	47.121	33.027	-21.079	68.200	14.094	PK
2			10035.500	44.477	29.103	-23.723	68.200	15.374	PK
3			10996.000	52.472	34.897	-21.528	74.000	17.575	PK
4			11846.000	44.917	27.026	-29.083	74.000	17.891	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/21 - 17:18
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11a at Channel 5600MHz with OAW-AP1321	

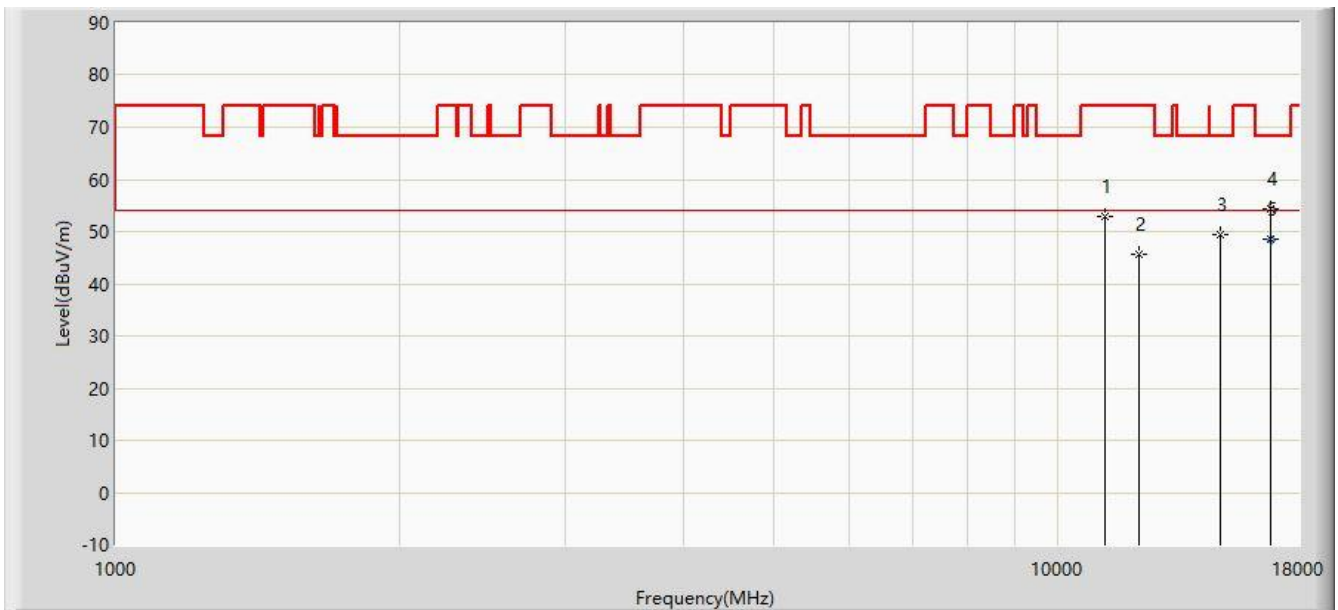


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			11200.000	52.772	35.004	-21.228	74.000	17.768	PK
2			12169.000	45.740	27.924	-28.260	74.000	17.816	PK
3			14889.000	49.330	28.571	-18.870	68.200	20.759	PK
4			16801.500	54.487	30.387	-13.713	68.200	24.100	PK
5		*	16802.600	48.548	24.440	-5.452	54.000	24.109	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/21 - 17:18
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11a at Channel 5600MHz with OAW-AP1321	

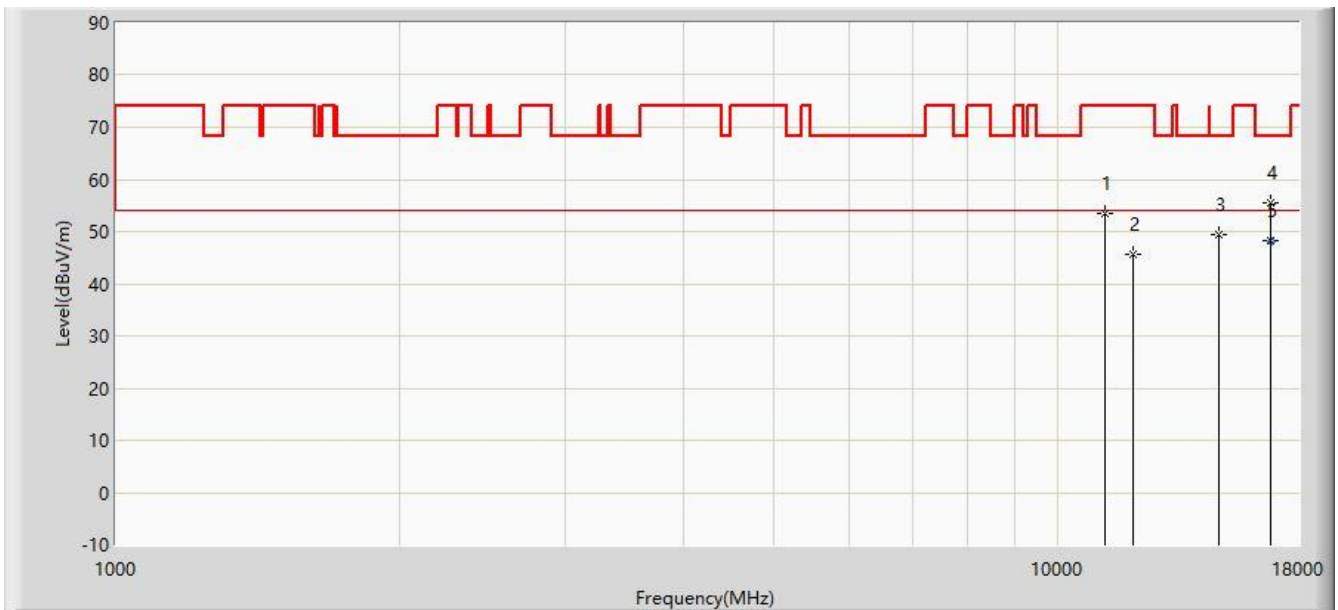


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			11200.000	53.479	35.711	-20.521	74.000	17.768	PK
2			12007.500	45.610	27.791	-28.390	74.000	17.820	PK
3			14821.000	49.332	28.590	-18.868	68.200	20.742	PK
4			16793.000	55.623	31.583	-12.577	68.200	24.040	PK
5		*	16794.400	48.312	24.262	-5.688	54.000	24.050	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/21 - 17:18
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11a at Channel 5700MHz with OAW-AP1321	

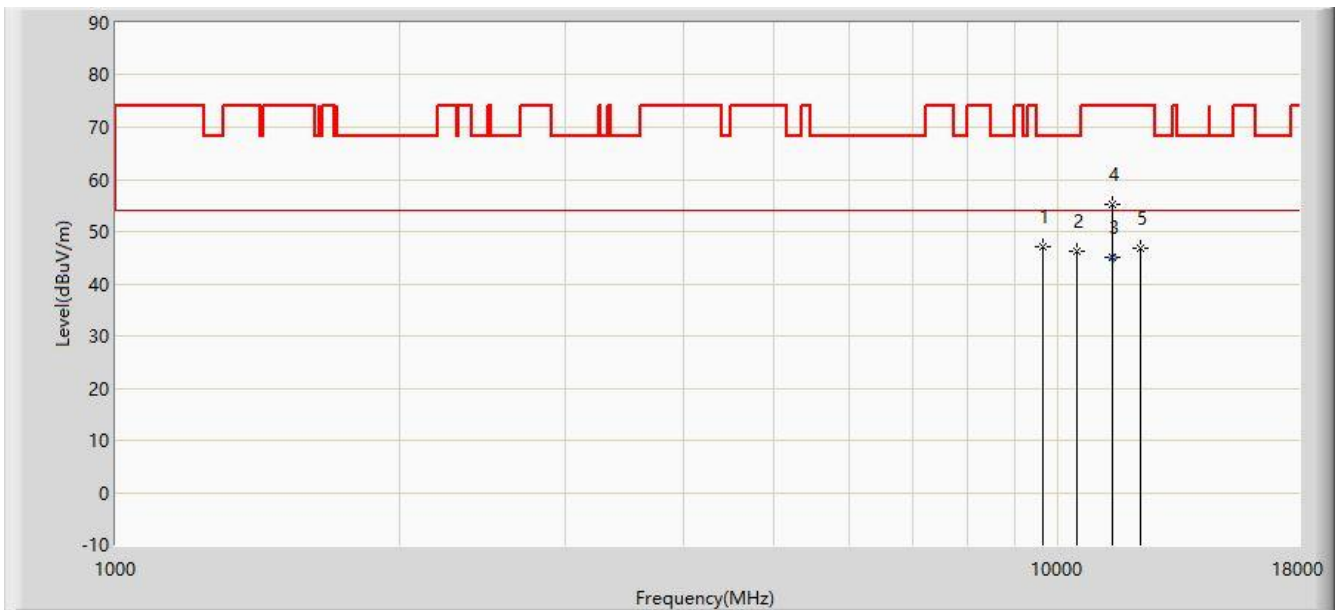


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			9644.500	46.999	32.905	-21.201	68.200	14.094	PK
2			10477.500	46.129	29.332	-22.071	68.200	16.797	PK
3		*	11400.100	45.070	27.114	-8.930	54.000	17.956	AV
4			11404.000	55.196	37.236	-18.804	74.000	17.960	PK
5			12245.500	46.873	29.060	-27.127	74.000	17.813	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/21 - 17:18
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11a at Channel 5700MHz with OAW-AP1321	

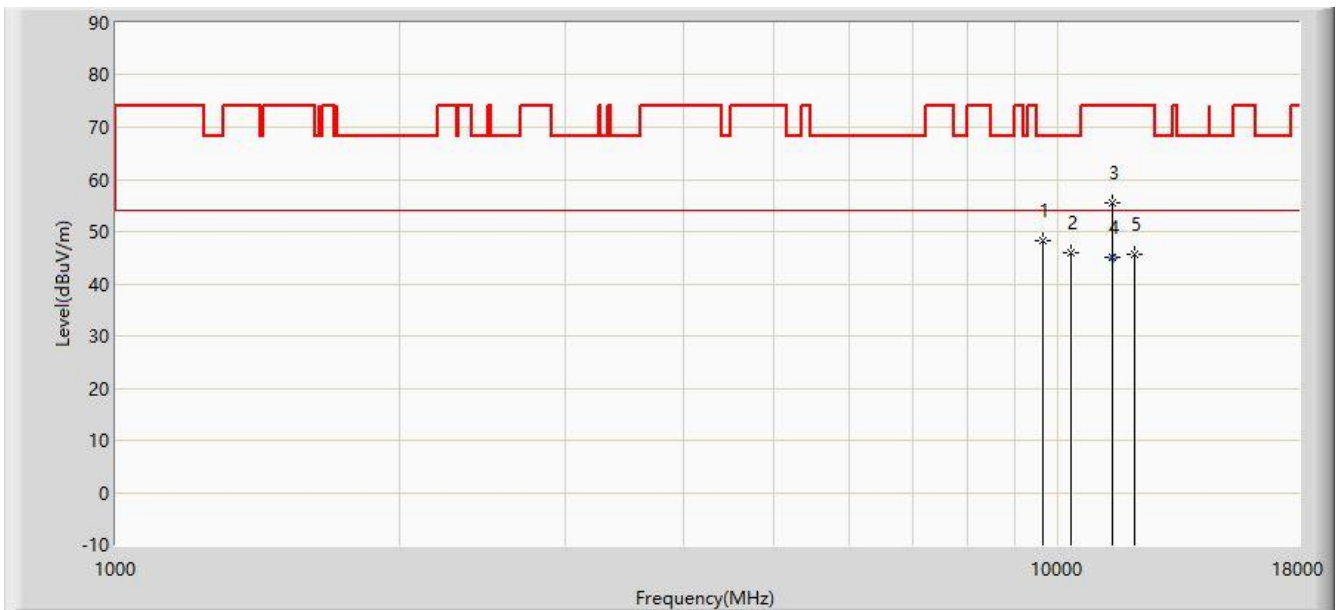


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			9644.500	48.354	34.260	-19.846	68.200	14.094	PK
2			10324.500	45.844	29.539	-22.356	68.200	16.305	PK
3			11404.000	55.588	37.628	-18.412	74.000	17.960	PK
4		*	11404.500	44.941	26.981	-9.059	54.000	17.961	AV
5			12058.500	45.575	27.757	-28.425	74.000	17.818	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/21 - 17:18
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11a at Channel 5720MHz with OAW-AP1321	

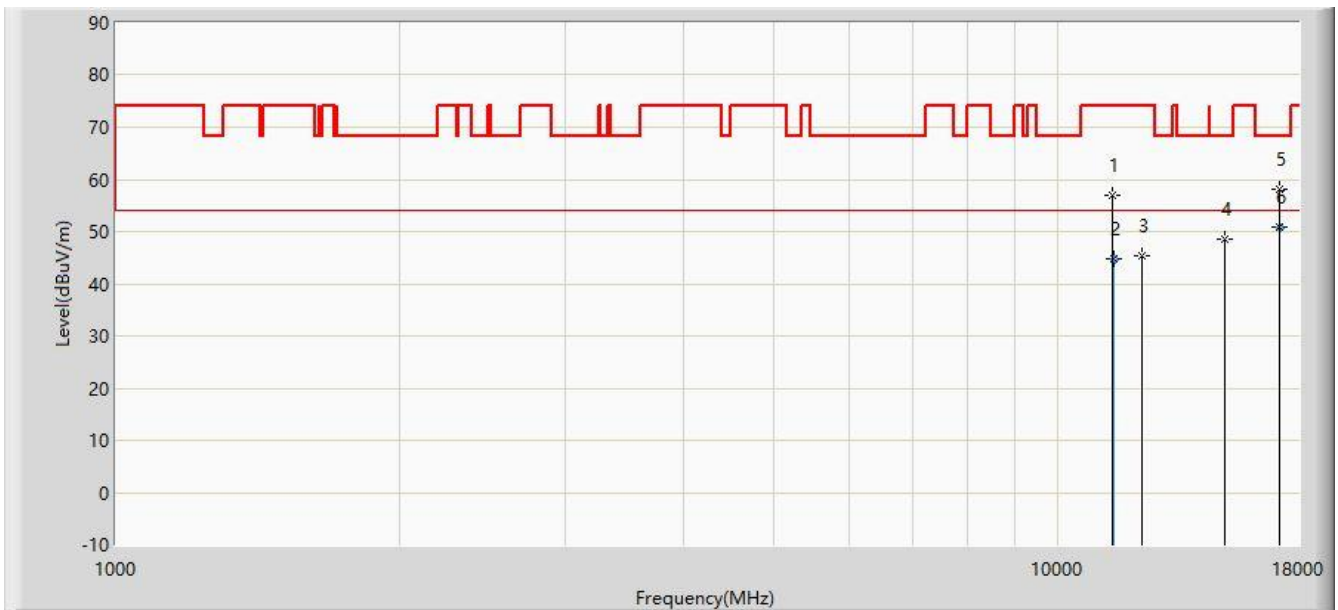


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			11438.000	56.884	38.893	-17.116	74.000	17.991	PK
2			11439.500	44.740	26.747	-9.260	54.000	17.992	AV
3			12271.000	45.472	27.661	-28.528	74.000	17.811	PK
4			14999.500	48.609	27.819	-19.591	68.200	20.789	PK
5			17158.500	57.972	30.963	-10.228	68.200	27.009	PK
6		*	17159.500	50.887	23.868	-3.113	54.000	27.020	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/21 - 17:18
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11a at Channel 5720MHz with OAW-AP1321	

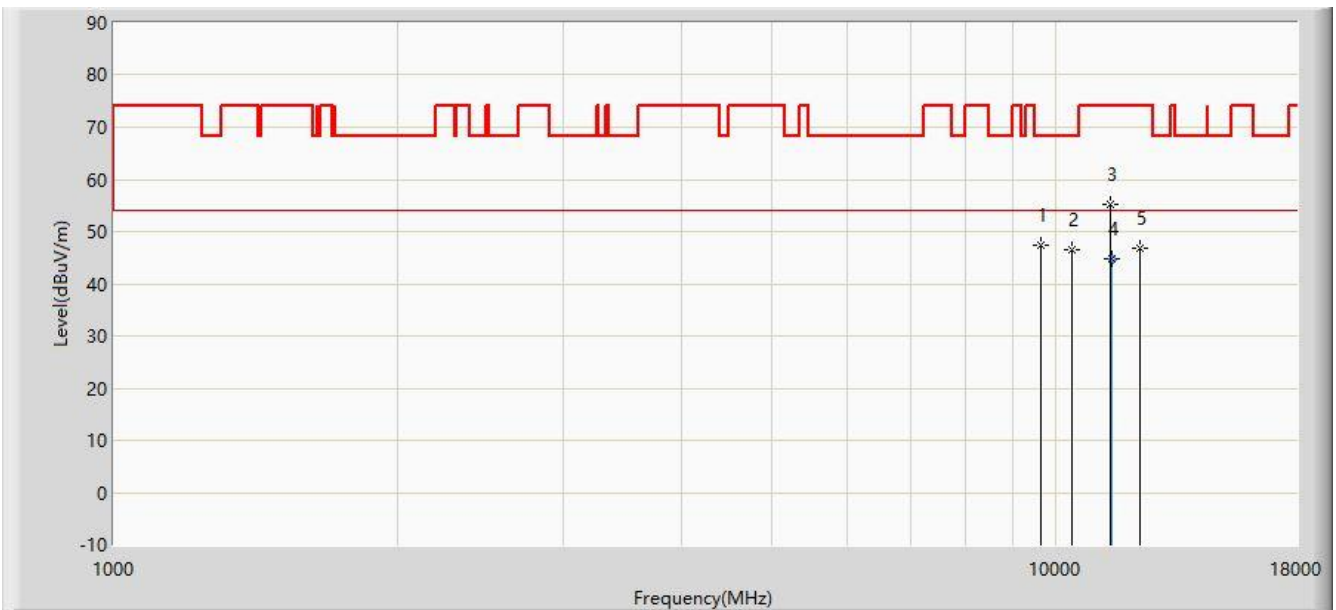


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			9644.500	47.334	33.240	-20.866	68.200	14.094	PK
2			10392.500	46.395	29.872	-21.805	68.200	16.524	PK
3			11438.000	55.258	37.267	-18.742	74.000	17.991	PK
4		*	11438.600	44.755	26.763	-9.245	54.000	17.993	AV
5			12288.000	46.749	28.938	-27.251	74.000	17.811	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/21 - 17:18
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11a at Channel 5745MHz with OAW-AP1321	

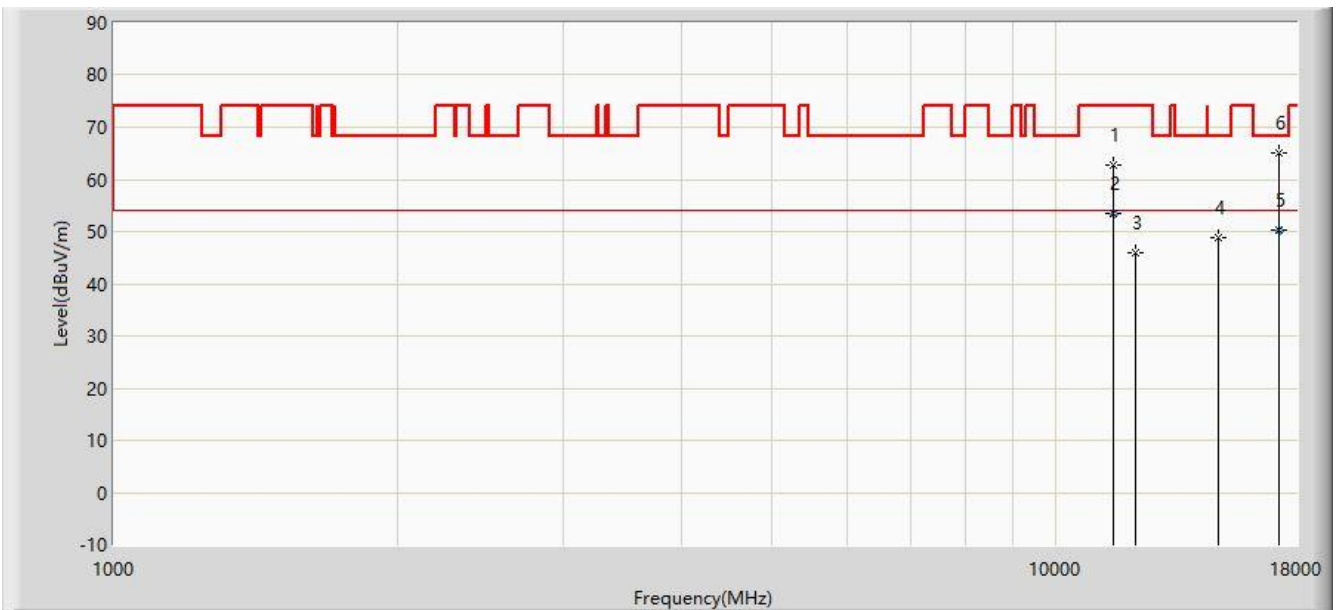


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			11489.000	62.798	44.758	-11.202	74.000	18.040	PK
2		*	11490.250	53.516	35.476	-0.484	54.000	18.040	AV
3			12143.500	45.972	28.156	-28.028	74.000	17.816	PK
4			14880.500	48.740	27.983	-19.460	68.200	20.758	PK
5			17234.000	50.199	22.475	-3.801	54.000	27.723	AV
6			17235.000	65.190	37.457	-3.010	68.200	27.733	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/21 - 17:18
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11a at Channel 5745MHz with OAW-AP1321	

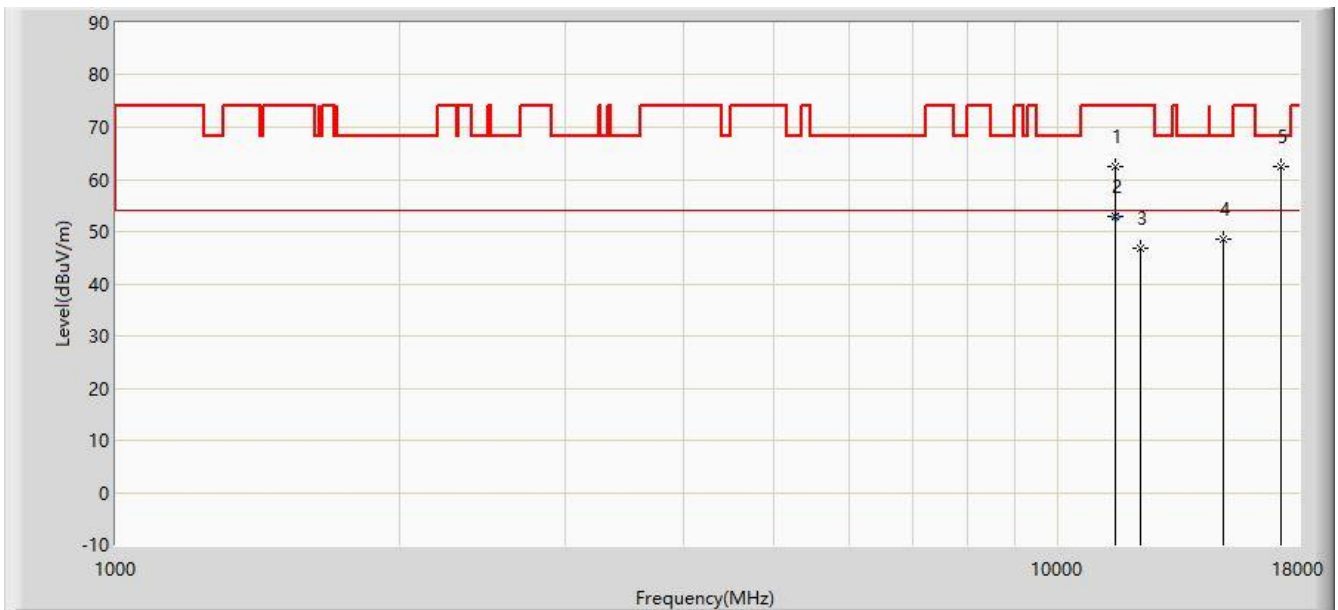


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			11489.000	62.403	44.363	-11.597	74.000	18.040	PK
2		*	11490.600	52.827	34.787	-1.173	54.000	18.041	AV
3			12237.000	46.687	28.874	-27.313	74.000	17.813	PK
4			14991.000	48.520	27.732	-19.680	68.200	20.788	PK
5			17243.500	62.590	34.777	-5.610	68.200	27.813	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/21 - 17:18
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11a at Channel 5785MHz with OAW-AP1321	

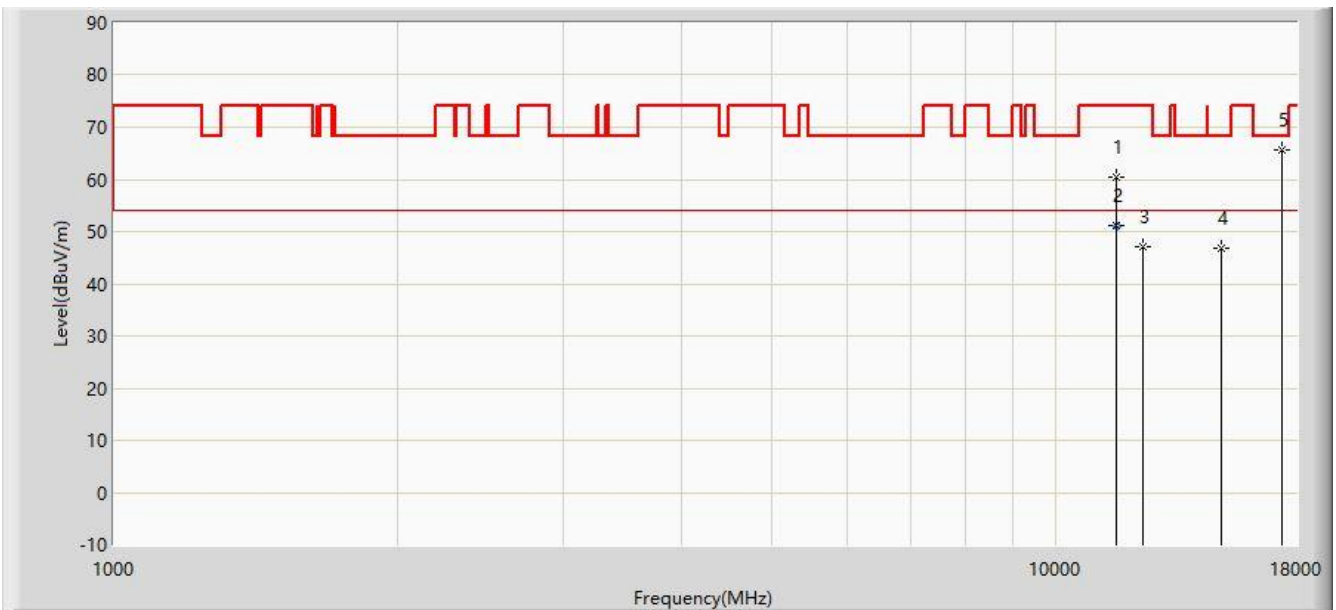

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			11574.000	60.549	42.533	-13.451	74.000	18.016	PK
2			11575.600	51.107	33.092	-2.893	54.000	18.016	AV
3			12356.000	47.133	29.324	-26.867	74.000	17.809	PK
4			14948.500	46.939	26.163	-21.261	68.200	20.776	PK
5		*	17362.500	65.575	36.636	-2.625	68.200	28.939	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/21 - 17:18
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11a at Channel 5785MHz with OAW-AP1321	




No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			11574.000	60.558	42.542	-13.442	74.000	18.016	PK
2		*	11574.600	51.940	33.924	-2.060	54.000	18.015	AV
3			12058.500	45.573	27.755	-28.427	74.000	17.818	PK
4			14999.500	48.757	27.967	-19.443	68.200	20.789	PK
5			17362.500	60.781	31.842	-7.419	68.200	28.939	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/21 - 17:18
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11a at Channel 5825MHz with OAW-AP1321	

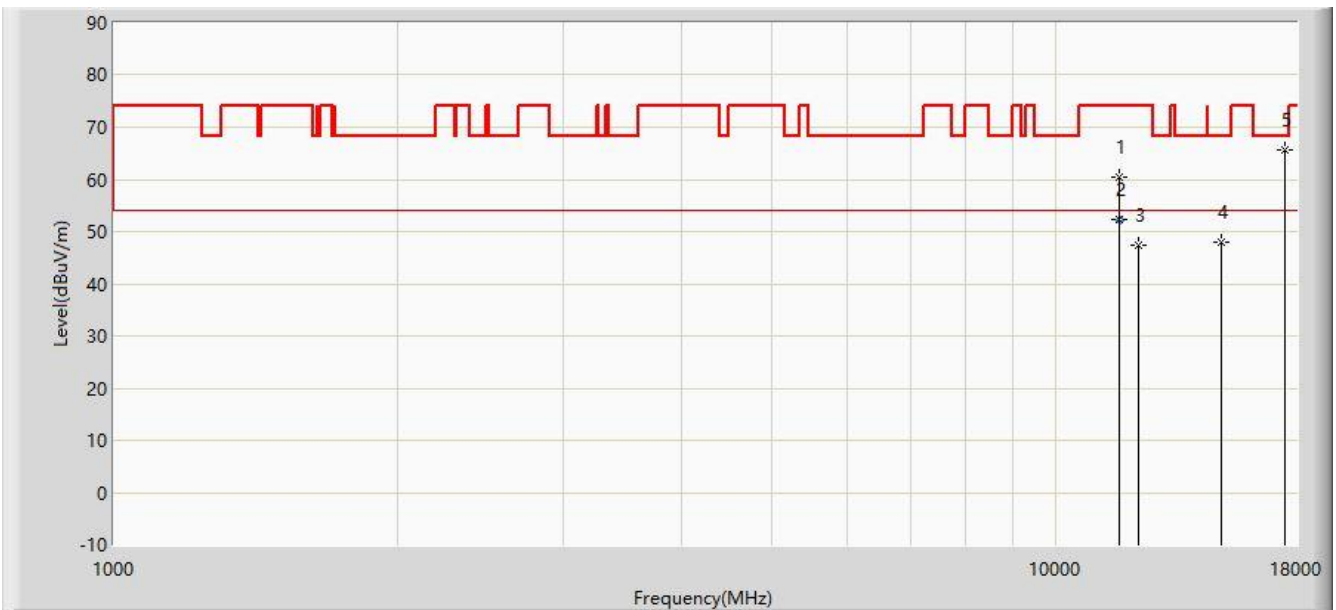


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			11659.000	60.382	42.405	-13.618	74.000	17.977	PK
2		*	11660.600	52.317	34.340	-1.683	54.000	17.977	AV
3			12220.000	47.339	29.525	-26.661	74.000	17.814	PK
4			14965.500	48.099	27.319	-20.101	68.200	20.780	PK
5			17481.500	65.705	35.640	-2.495	68.200	30.065	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/21 - 17:18
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11a at Channel 5825MHz with OAW-AP1321	

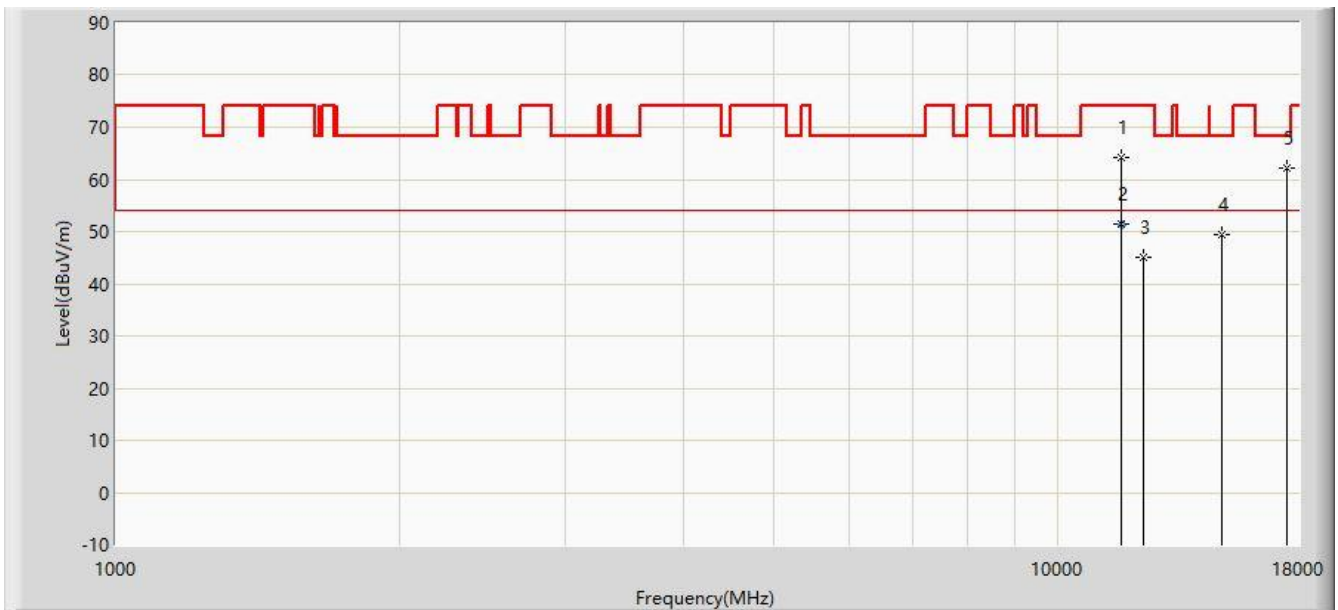


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			11650.500	64.272	46.291	-9.728	74.000	17.981	PK
2		*	11652.000	51.369	33.389	-2.631	54.000	17.980	AV
3			12330.500	45.069	27.259	-28.931	74.000	17.810	PK
4			14940.000	49.478	28.704	-18.722	68.200	20.774	PK
5			17481.500	62.127	32.062	-6.073	68.200	30.065	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/21 - 17:19
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT20 at Channel 5180MHz with OAW-AP1321	

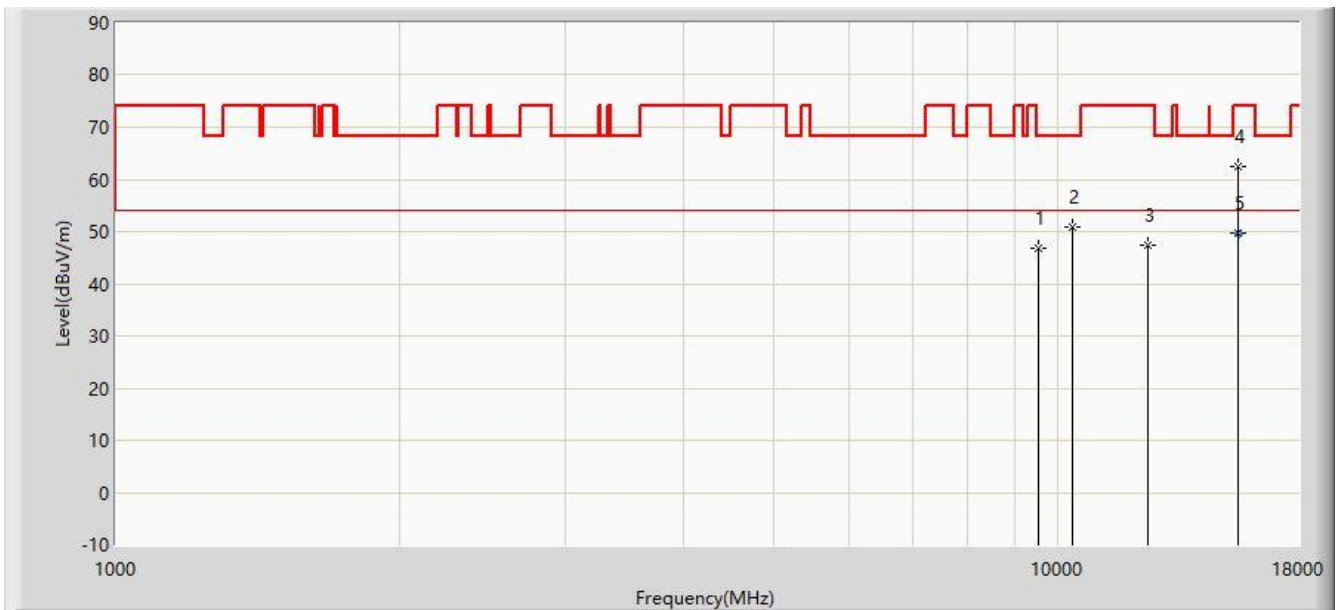


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			9525.500	46.697	32.993	-21.503	68.200	13.704	PK
2			10358.500	50.823	34.409	-17.377	68.200	16.414	PK
3			12449.500	47.316	29.510	-26.684	74.000	17.806	PK
4			15535.000	62.347	41.428	-11.653	74.000	20.919	PK
5		*	15537.400	49.598	28.681	-4.402	54.000	20.917	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/21 - 17:19
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT20 at Channel 5180MHz with OAW-AP1321	

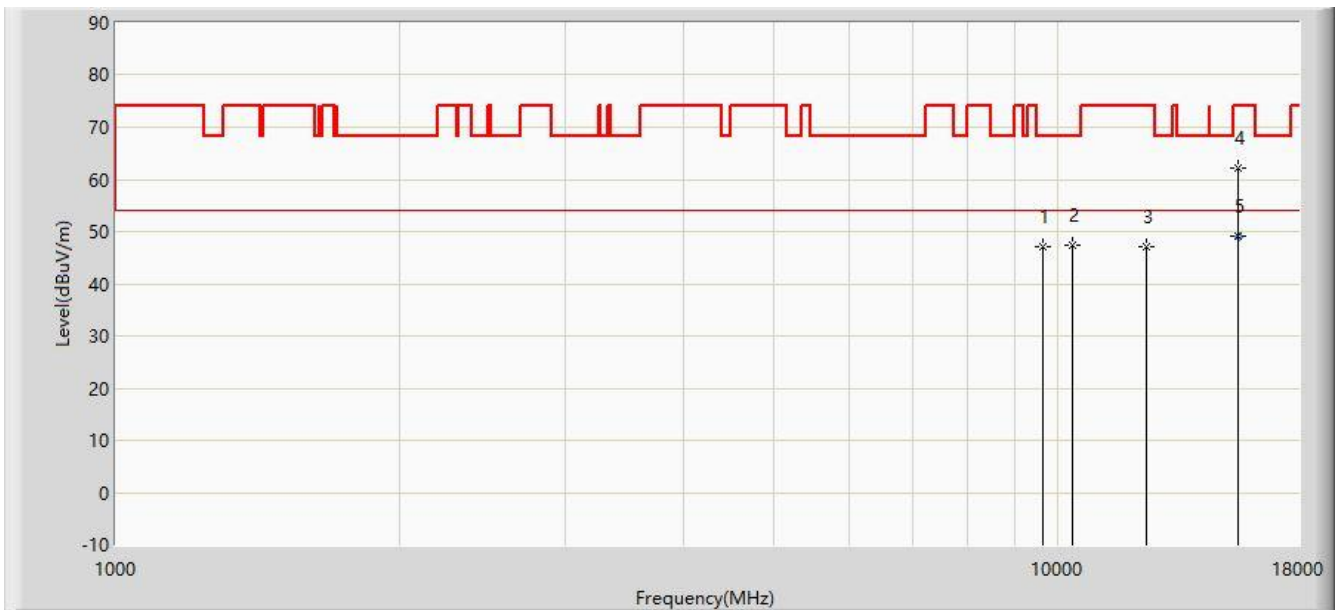


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			9644.500	46.975	32.881	-21.225	68.200	14.094	PK
2			10358.500	47.392	30.978	-20.808	68.200	16.414	PK
3			12390.000	47.013	29.205	-26.987	74.000	17.808	PK
4			15535.000	62.281	41.362	-11.719	74.000	20.919	PK
5		*	15536.000	49.232	28.314	-4.768	54.000	20.918	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/21 - 17:19
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT20 at Channel 5220MHz with OAW-AP1321	

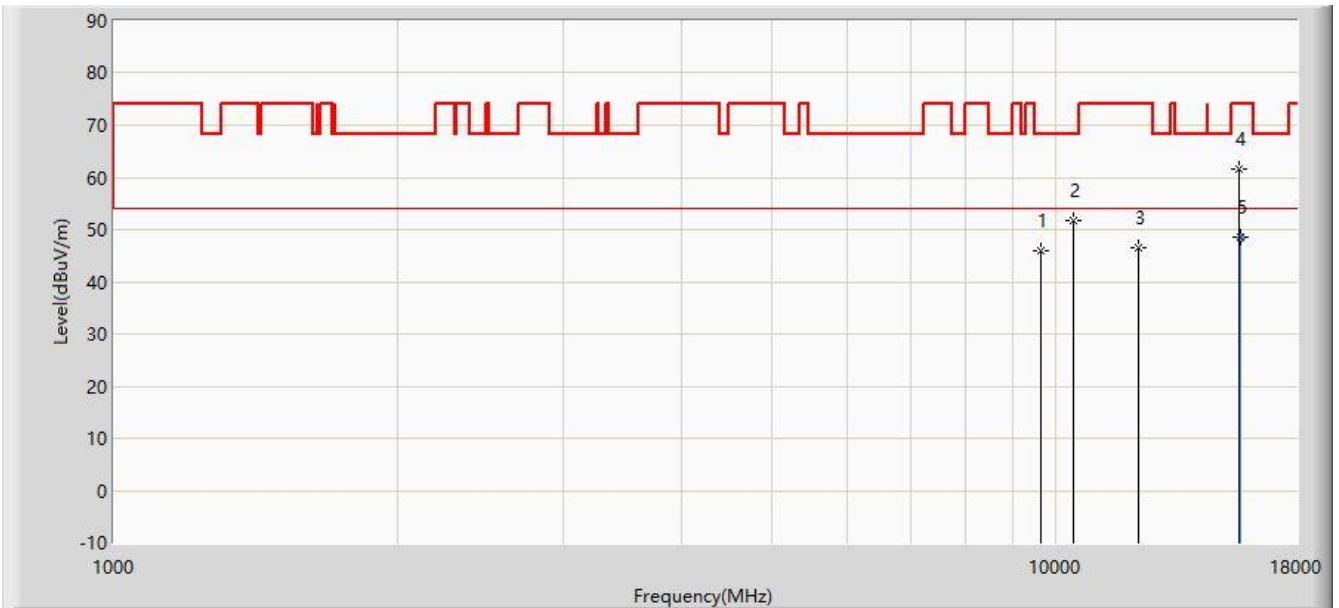


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			9644.500	46.072	31.978	-22.128	68.200	14.094	PK
2			10435.000	51.770	35.109	-16.430	68.200	16.661	PK
3			12220.000	46.450	28.636	-27.550	74.000	17.814	PK
4			15662.500	61.518	40.711	-12.482	74.000	20.807	PK
5		*	15664.300	48.682	27.877	-5.318	54.000	20.805	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/21 - 17:19
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT20 at Channel 5220MHz with OAW-AP1321	

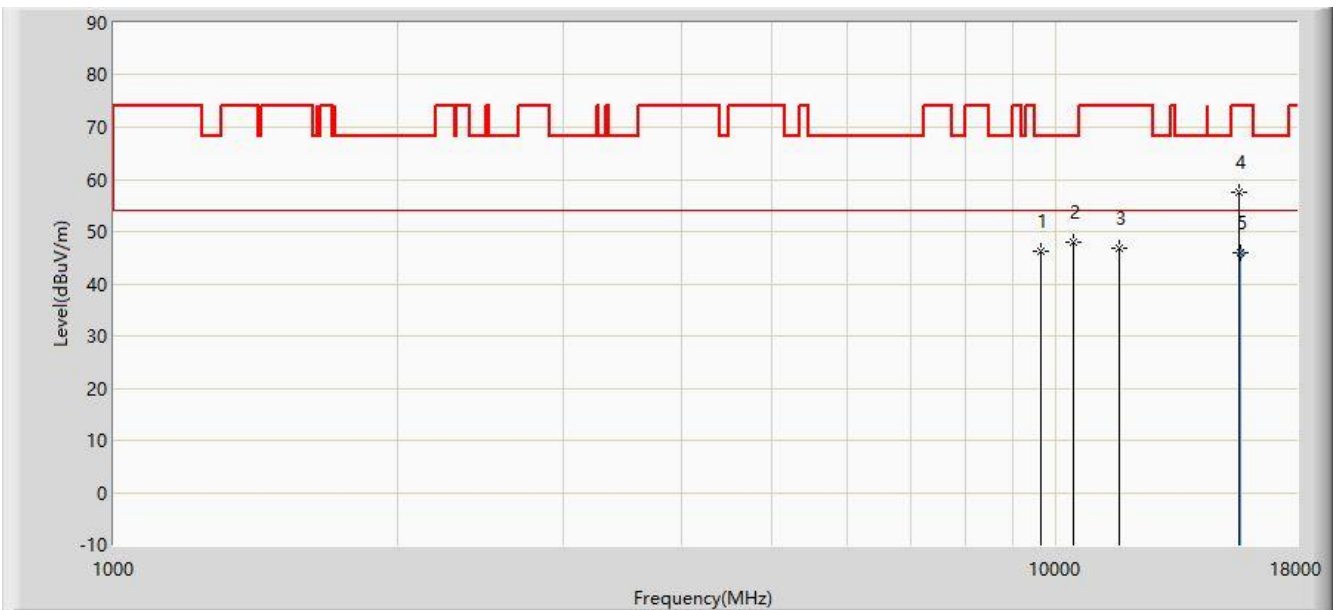


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			9644.500	46.272	32.178	-21.928	68.200	14.094	PK
2			10443.500	48.057	31.369	-20.143	68.200	16.688	PK
3			11684.500	46.889	28.924	-27.111	74.000	17.964	PK
4			15662.500	57.615	36.808	-16.385	74.000	20.807	PK
5		*	15665.300	45.840	25.036	-8.160	54.000	20.804	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/21 - 17:19
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT20 at Channel 5240MHz with OAW-AP1321	

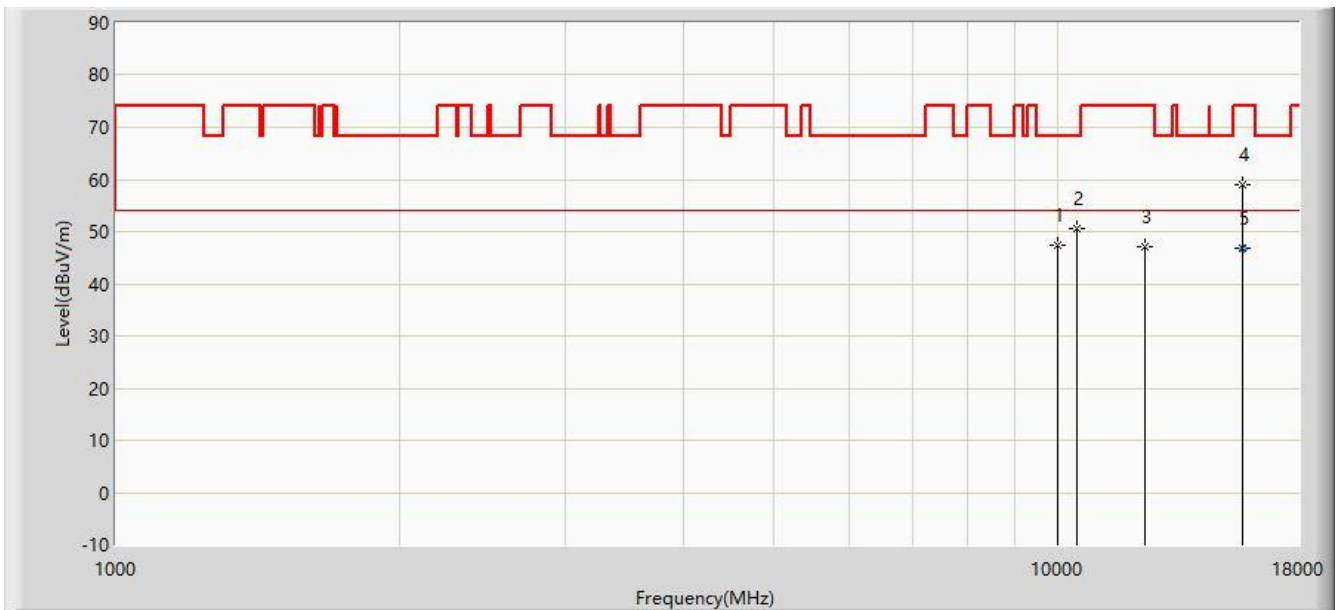


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			10001.500	47.500	32.235	-20.700	68.200	15.265	PK
2			10486.000	50.717	33.892	-17.483	68.200	16.825	PK
3			12347.500	47.103	29.294	-26.897	74.000	17.809	PK
4			15713.500	58.912	38.150	-15.088	74.000	20.762	PK
5		*	15715.000	46.692	25.931	-7.308	54.000	20.761	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/21 - 17:19
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT20 at Channel 5240MHz with OAW-AP1321	

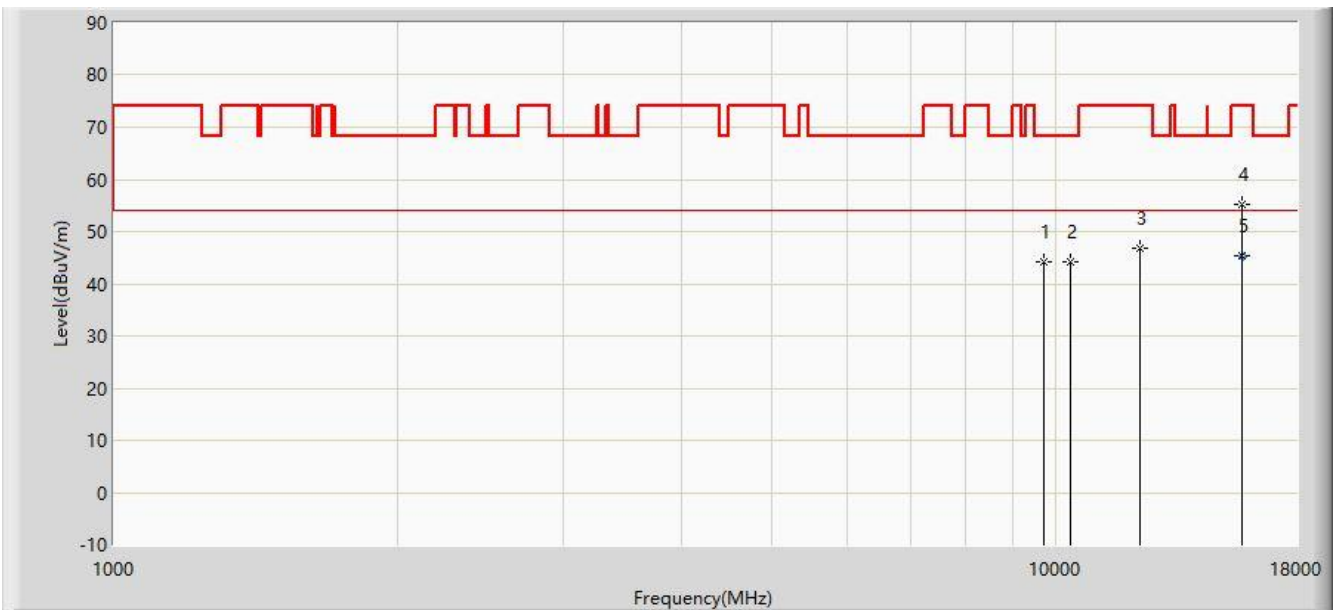


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			9721.000	44.100	29.755	-24.100	68.200	14.345	PK
2			10350.000	44.338	27.951	-23.862	68.200	16.387	PK
3			12288.000	46.932	29.121	-27.068	74.000	17.811	PK
4			15722.000	55.206	34.452	-18.794	74.000	20.754	PK
5		*	15724.500	45.420	24.668	-8.580	54.000	20.752	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/21 - 17:19
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT20 at Channel 5260MHz with OAW-AP1321	

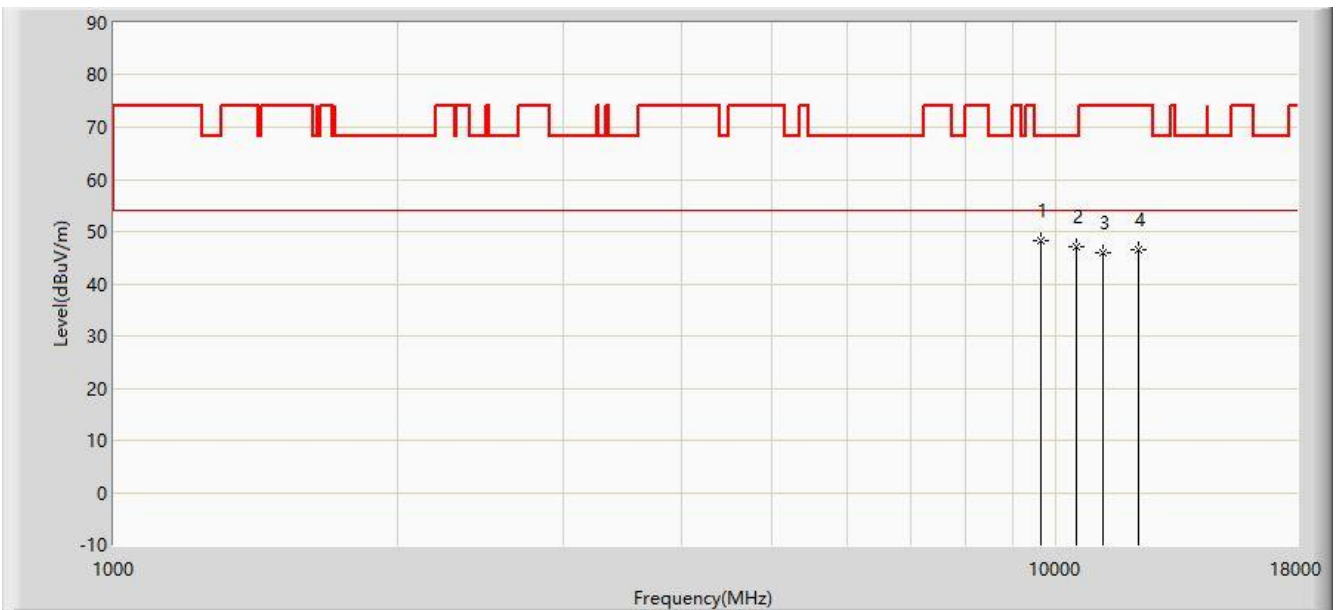


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	9644.500	48.319	34.225	-19.881	68.200	14.094	PK
2			10520.000	47.190	30.292	-21.010	68.200	16.898	PK
3			11200.000	45.825	28.057	-28.175	74.000	17.768	PK
4			12220.000	46.434	28.620	-27.566	74.000	17.814	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/21 - 17:19
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT20 at Channel 5260MHz with OAW-AP1321	

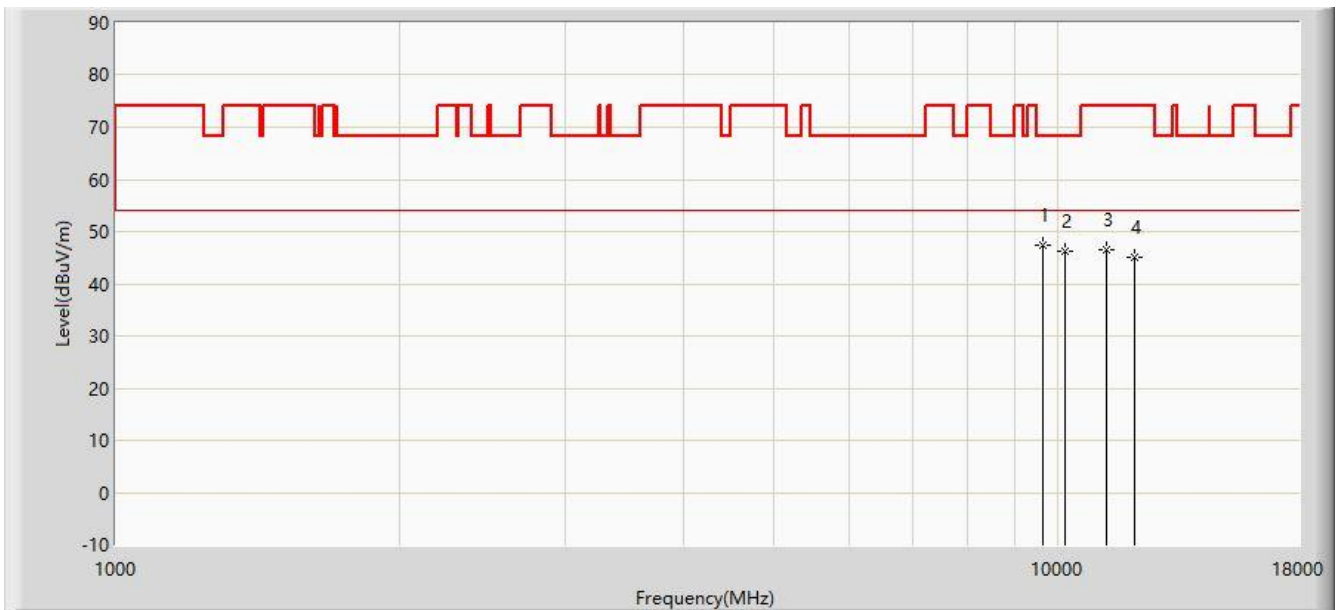


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	9644.500	47.501	33.407	-20.699	68.200	14.094	PK
2			10163.000	46.195	30.410	-22.005	68.200	15.785	PK
3			11259.500	46.482	28.658	-27.518	74.000	17.824	PK
4			12041.500	45.168	27.349	-28.832	74.000	17.818	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/21 - 17:19
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT20 at Channel 5300MHz with OAW-AP1321	

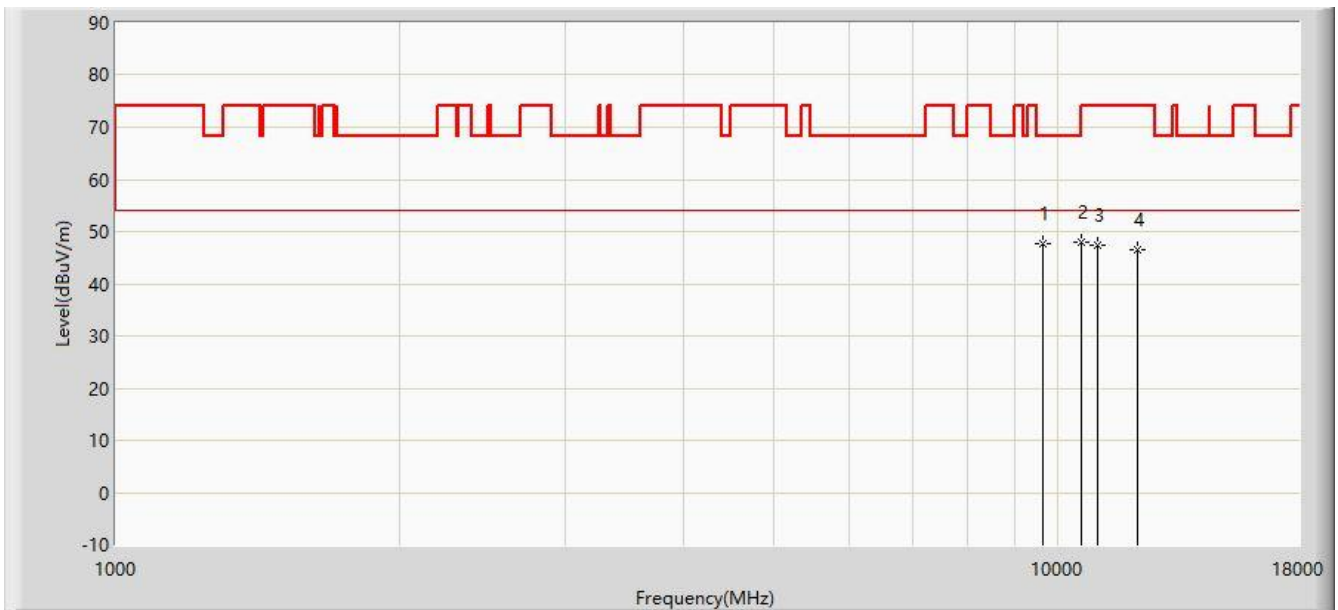


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			9644.500	47.731	33.637	-20.469	68.200	14.094	PK
2		*	10596.500	47.944	30.937	-20.256	68.200	17.007	PK
3			11021.500	47.256	29.656	-26.744	74.000	17.600	PK
4			12160.500	46.615	28.799	-27.385	74.000	17.816	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/21 - 17:19
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT20 at Channel 5300MHz with OAW-AP1321	

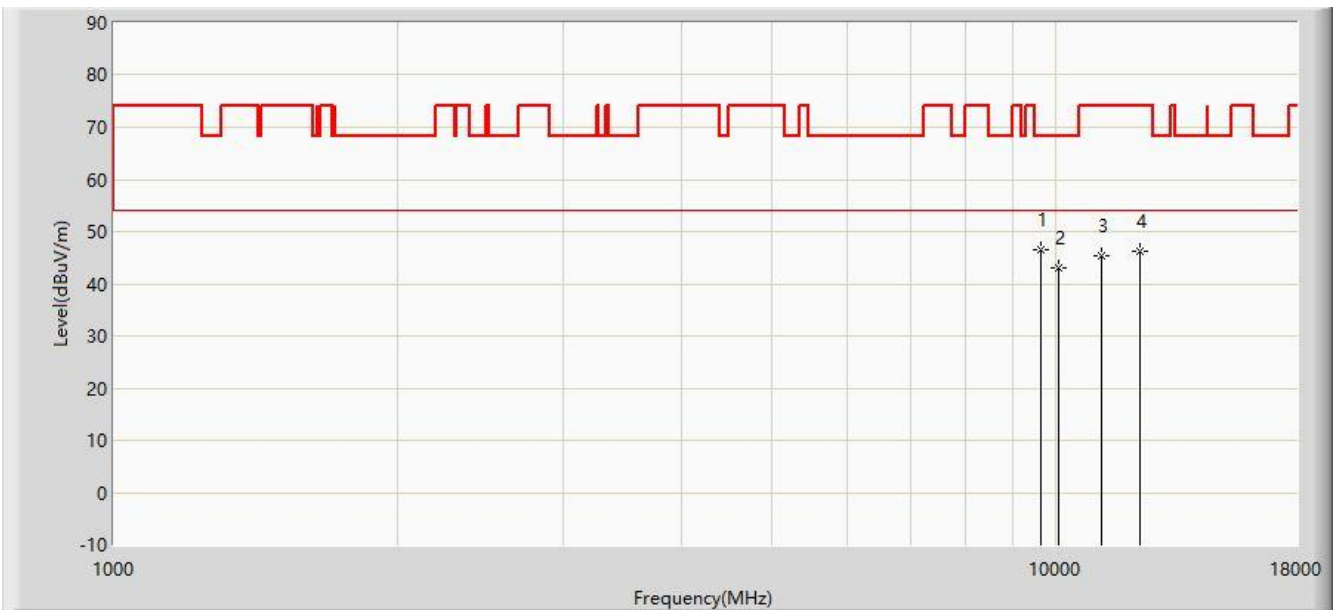


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	9644.500	46.525	32.431	-21.675	68.200	14.094	PK
2			10078.000	43.134	27.622	-25.066	68.200	15.512	PK
3			11174.500	45.359	27.615	-28.641	74.000	17.743	PK
4			12254.000	46.294	28.481	-27.706	74.000	17.813	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/21 - 17:19
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT20 at Channel 5320MHz with OAW-AP1321	

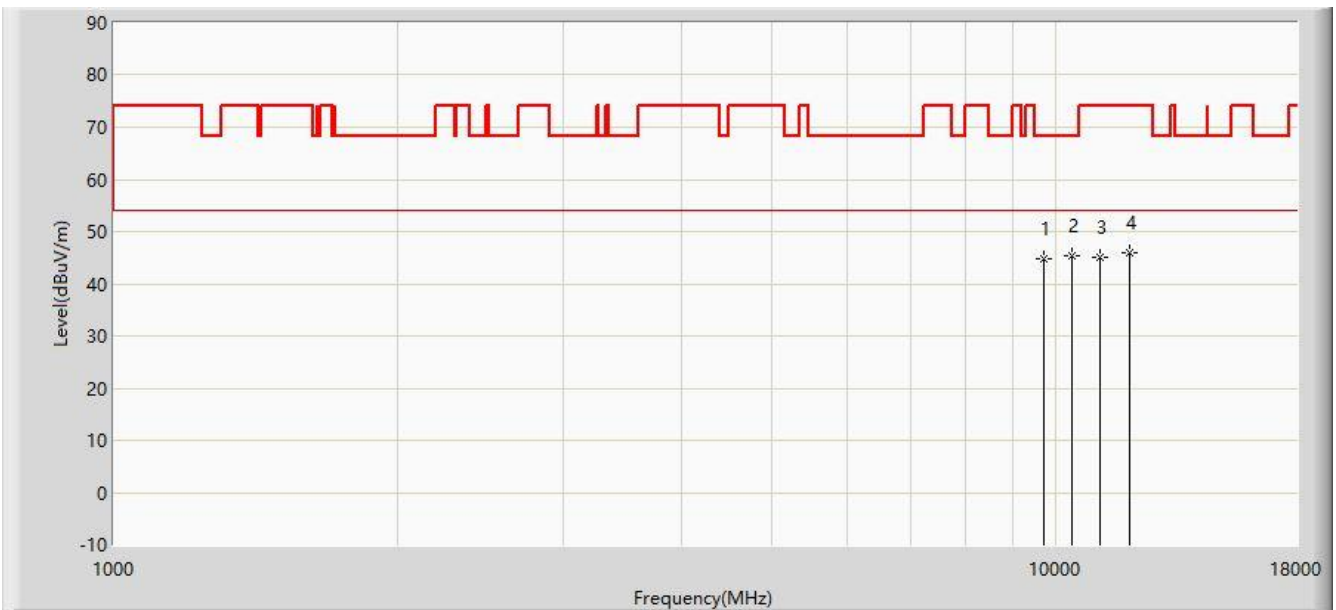


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			9721.000	44.668	30.323	-23.532	68.200	14.345	PK
2		*	10401.000	45.349	28.798	-22.851	68.200	16.551	PK
3			11123.500	45.071	27.375	-28.929	74.000	17.696	PK
4			11948.000	46.032	28.188	-27.968	74.000	17.844	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/21 - 17:19
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT20 at Channel 5320MHz with OAW-AP1321	

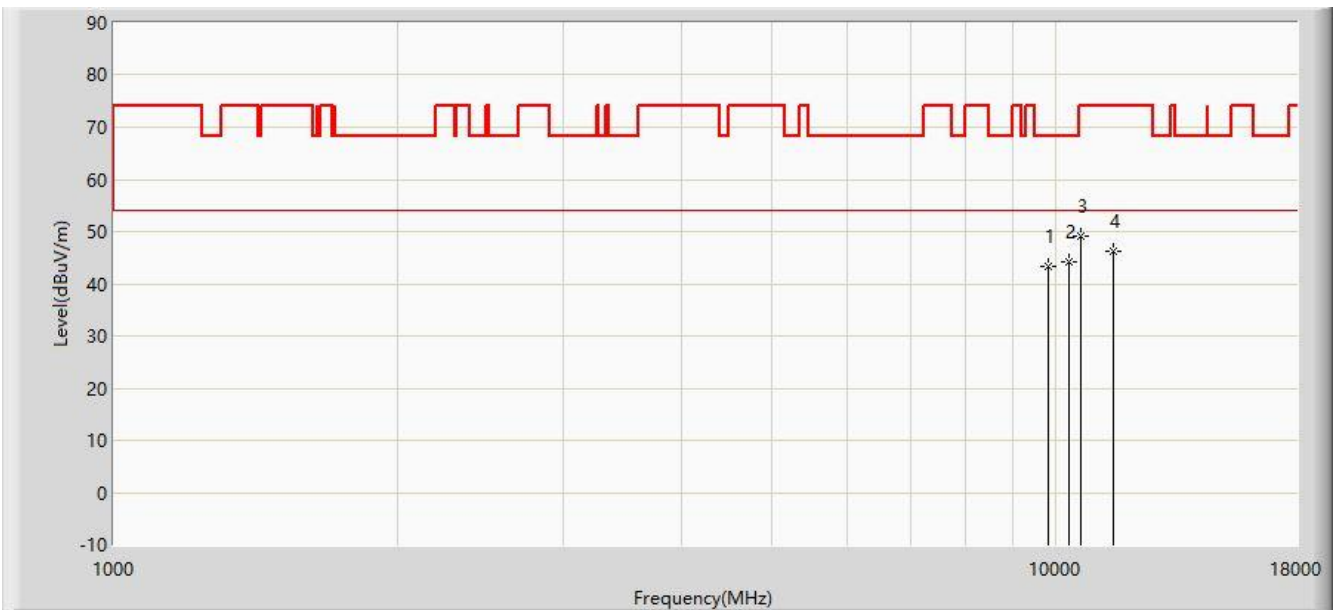


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			9814.500	43.321	28.669	-24.879	68.200	14.652	PK
2		*	10307.500	44.329	28.078	-23.871	68.200	16.251	PK
3			10639.000	49.052	31.984	-24.948	74.000	17.068	PK
4			11497.500	46.328	28.285	-27.672	74.000	18.043	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/21 - 17:20
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT20 at Channel 5500MHz with OAW-AP1321	

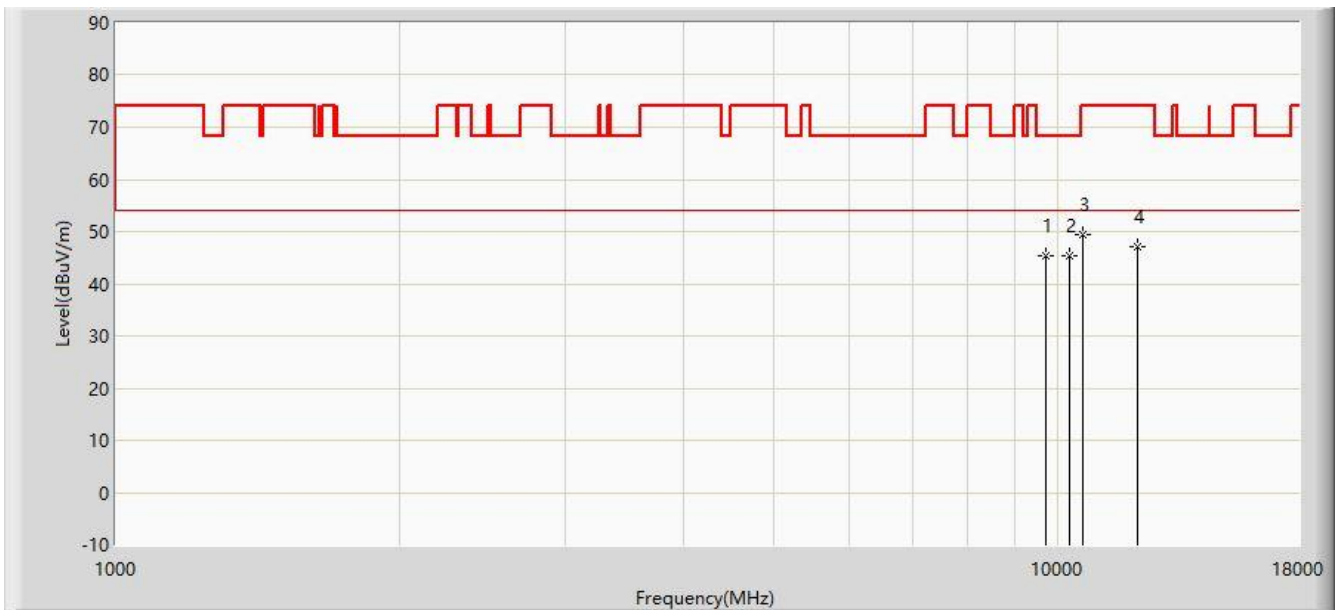


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	9721.000	45.395	31.050	-22.805	68.200	14.345	PK
2			10299.000	45.289	29.066	-22.911	68.200	16.223	PK
3			10639.000	49.327	32.259	-24.673	74.000	17.068	PK
4			12143.500	47.088	29.272	-26.912	74.000	17.816	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/21 - 17:20
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT20 at Channel 5500MHz with OAW-AP1321	

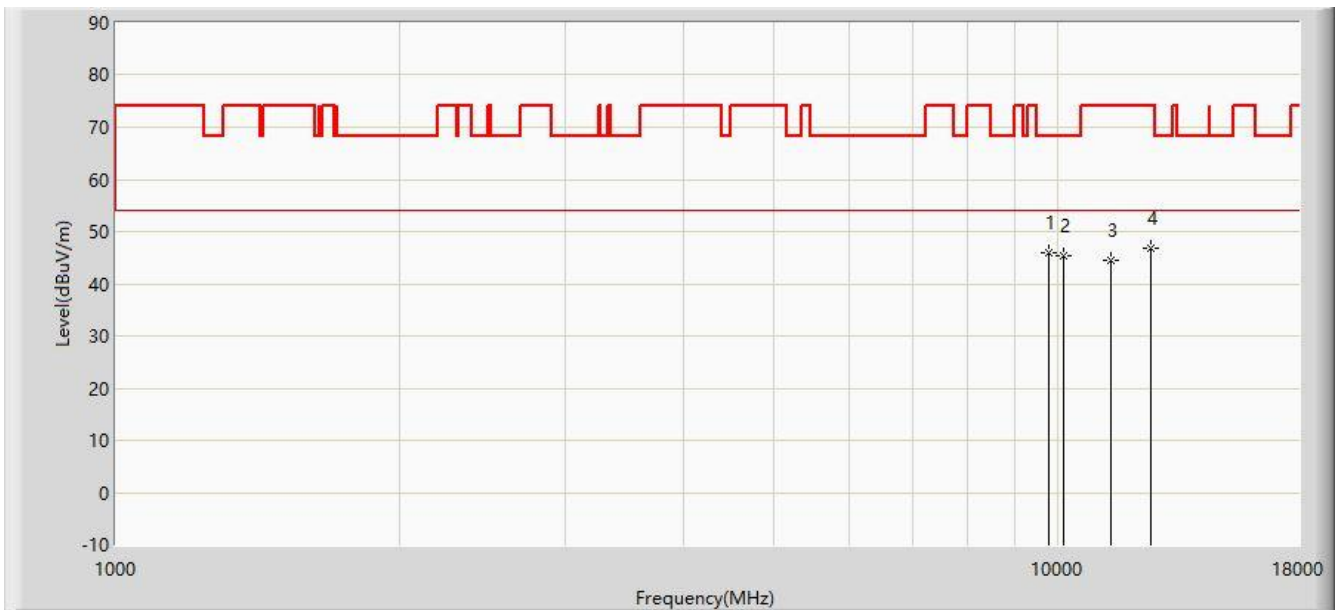


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	9763.500	45.872	31.388	-22.328	68.200	14.485	PK
2			10129.000	45.269	29.594	-22.931	68.200	15.675	PK
3			11378.500	44.599	26.663	-29.401	74.000	17.936	PK
4			12543.000	46.764	28.849	-27.236	74.000	17.915	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/21 - 17:20
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT20 at Channel 5600MHz with OAW-AP1321	

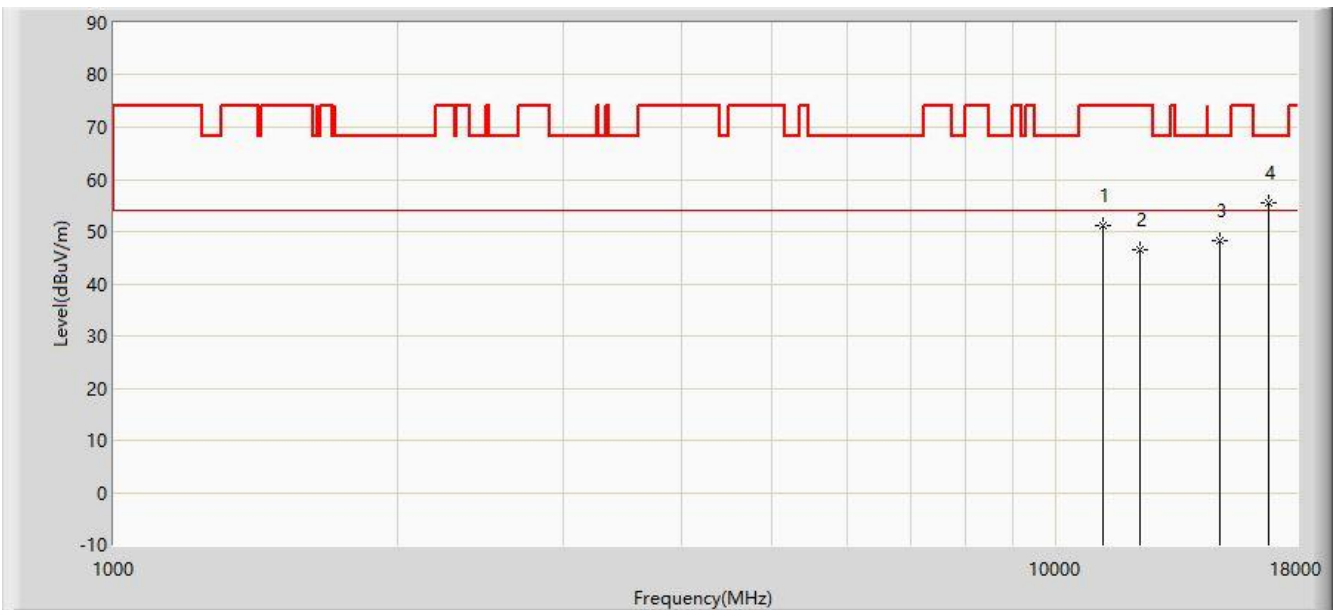


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			11200.000	51.210	33.442	-22.790	74.000	17.768	PK
2			12279.500	46.390	28.579	-27.610	74.000	17.810	PK
3			14931.500	48.337	27.565	-19.863	68.200	20.771	PK
4		*	16810.000	55.388	31.227	-12.812	68.200	24.161	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/21 - 17:20
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT20 at Channel 5600MHz with OAW-AP1321	

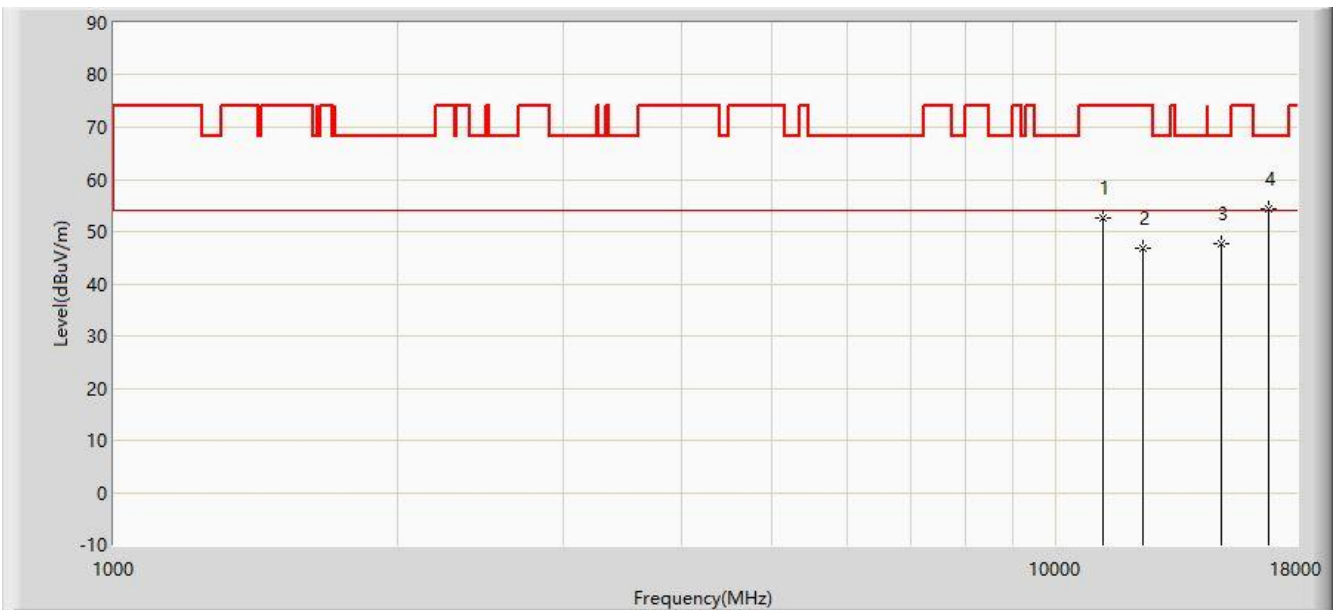


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			11200.000	52.695	34.927	-21.305	74.000	17.768	PK
2			12364.500	46.735	28.926	-27.265	74.000	17.810	PK
3			14948.500	47.789	27.013	-20.411	68.200	20.776	PK
4		*	16810.000	54.309	30.148	-13.891	68.200	24.161	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/21 - 17:20
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT20 at Channel 5700MHz with OAW-AP1321	

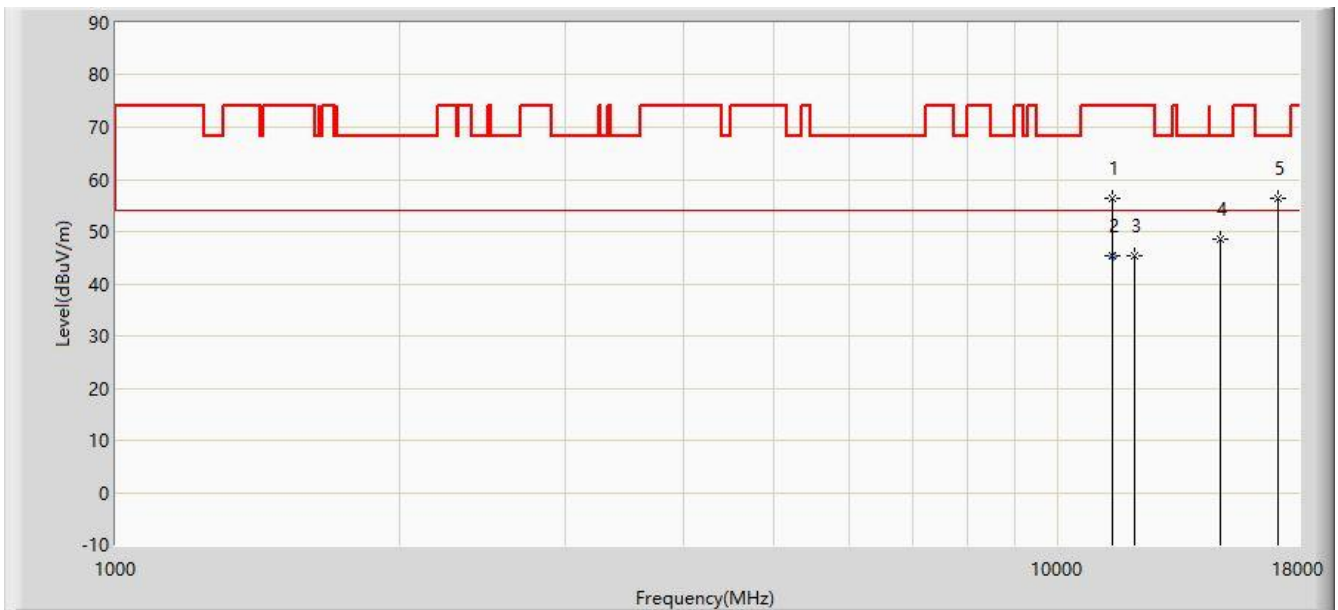


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			11404.000	56.366	38.406	-17.634	74.000	17.960	PK
2		*	11405.300	45.250	27.289	-8.750	54.000	17.961	AV
3			12058.500	45.350	27.532	-28.650	74.000	17.818	PK
4			14863.500	48.651	27.898	-19.549	68.200	20.752	PK
5			17099.000	56.492	30.046	-11.708	68.200	26.446	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/21 - 17:21
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT20 at Channel 5720MHz with OAW-AP1321	

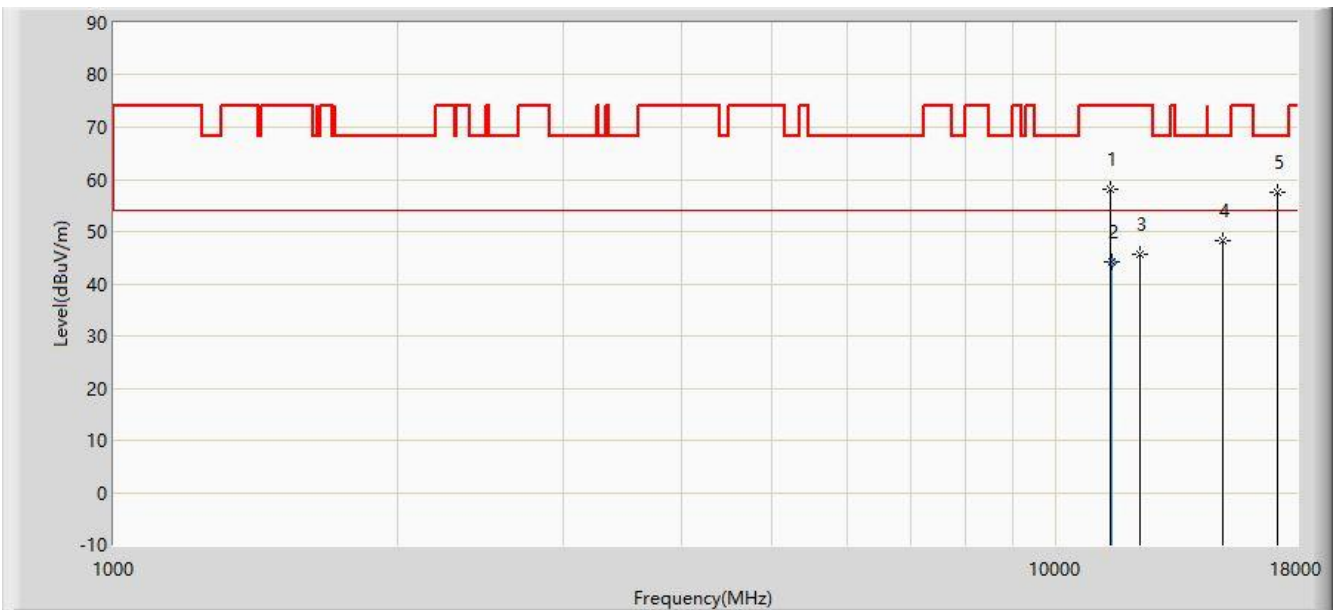


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			11438.000	58.093	40.102	-15.907	74.000	17.991	PK
2		*	11439.600	44.289	26.296	-9.711	54.000	17.993	AV
3			12271.000	45.797	27.986	-28.203	74.000	17.811	PK
4			15016.500	48.163	27.368	-20.037	68.200	20.795	PK
5			17158.500	57.572	30.563	-10.628	68.200	27.009	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/21 - 17:21
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT20 at Channel 5720MHz with OAW-AP1321	

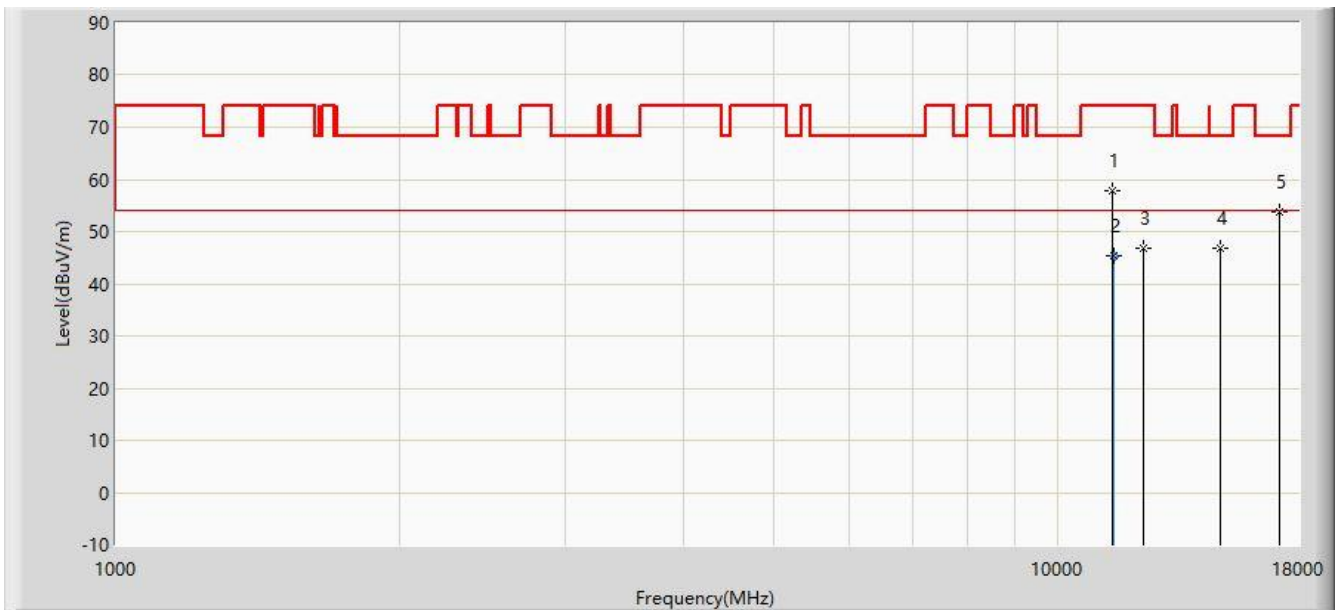


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			11438.000	57.962	39.971	-16.038	74.000	17.991	PK
2		*	11439.400	45.321	27.328	-8.679	54.000	17.992	AV
3			12322.000	46.869	29.058	-27.131	74.000	17.811	PK
4			14880.500	46.942	26.185	-21.258	68.200	20.758	PK
5			17158.500	53.802	26.793	-14.398	68.200	27.009	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/21 - 17:21
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT20 at Channel 5745MHz with OAW-AP1321	

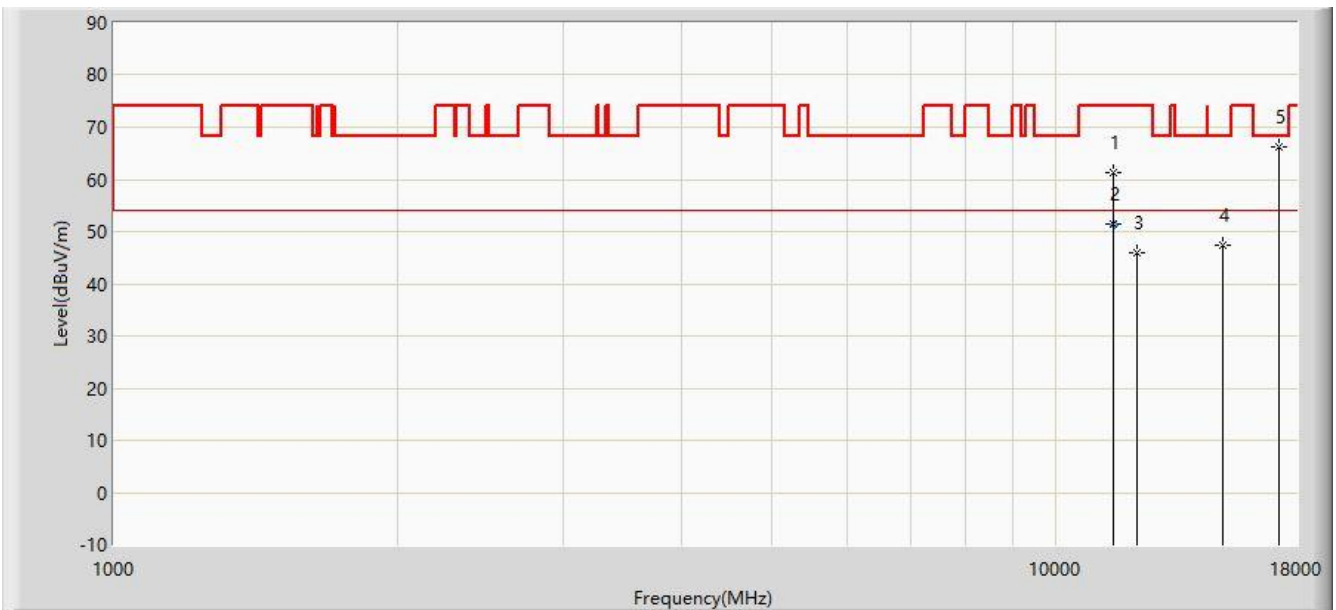


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			11480.500	61.285	43.253	-12.715	74.000	18.031	PK
2			11490.000	51.514	33.474	-2.486	54.000	18.040	AV
3			12194.500	45.940	28.126	-28.060	74.000	17.814	PK
4			14999.500	47.260	26.470	-20.940	68.200	20.789	PK
5		*	17235.000	66.111	38.378	-2.089	68.200	27.733	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/21 - 17:21
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT20 at Channel 5745MHz with OAW-AP1321	

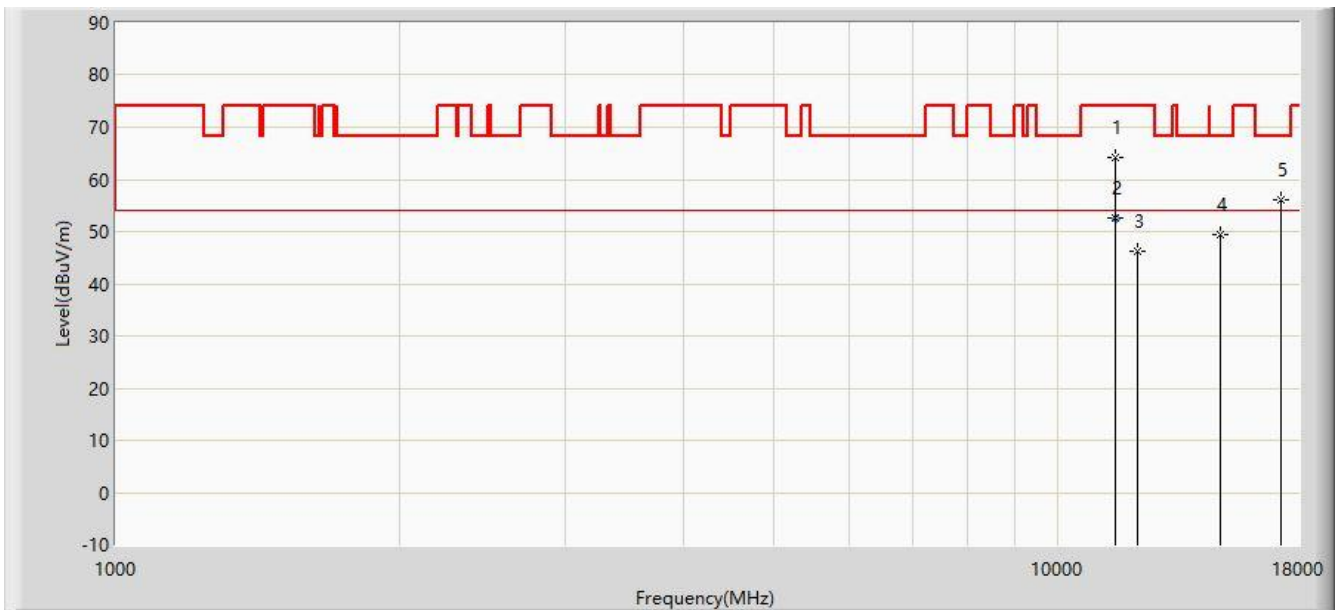


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			11489.000	64.164	46.124	-9.836	74.000	18.040	PK
2		*	11490.000	52.474	34.434	-1.526	54.000	18.040	AV
3			12152.000	46.245	28.429	-27.755	74.000	17.816	PK
4			14846.500	49.404	28.655	-18.796	68.200	20.749	PK
5			17252.000	56.123	28.230	-12.077	68.200	27.893	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/21 - 17:21
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT20 at Channel 5785MHz with OAW-AP1321	

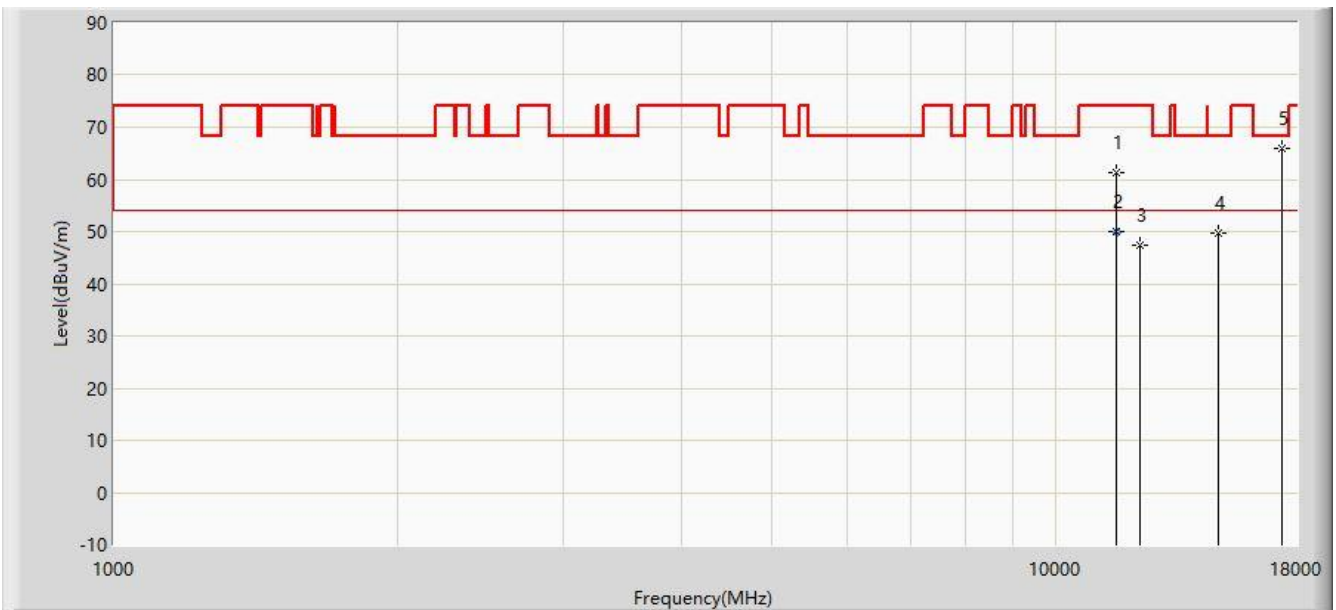


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			11565.500	61.423	43.403	-12.577	74.000	18.020	PK
2			11566.300	50.139	32.120	-3.861	54.000	18.020	AV
3			12288.000	47.335	29.524	-26.665	74.000	17.811	PK
4			14846.500	49.636	28.887	-18.564	68.200	20.749	PK
5		*	17362.500	66.081	37.142	-2.119	68.200	28.939	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/21 - 17:21
Limit: NCC LP0002_1GHz-40GHz	Engineer: Peter Syu
Probe: BBHA 9120D_1-18GHz_2019	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT20 at Channel 5785MHz with OAW-AP1321	

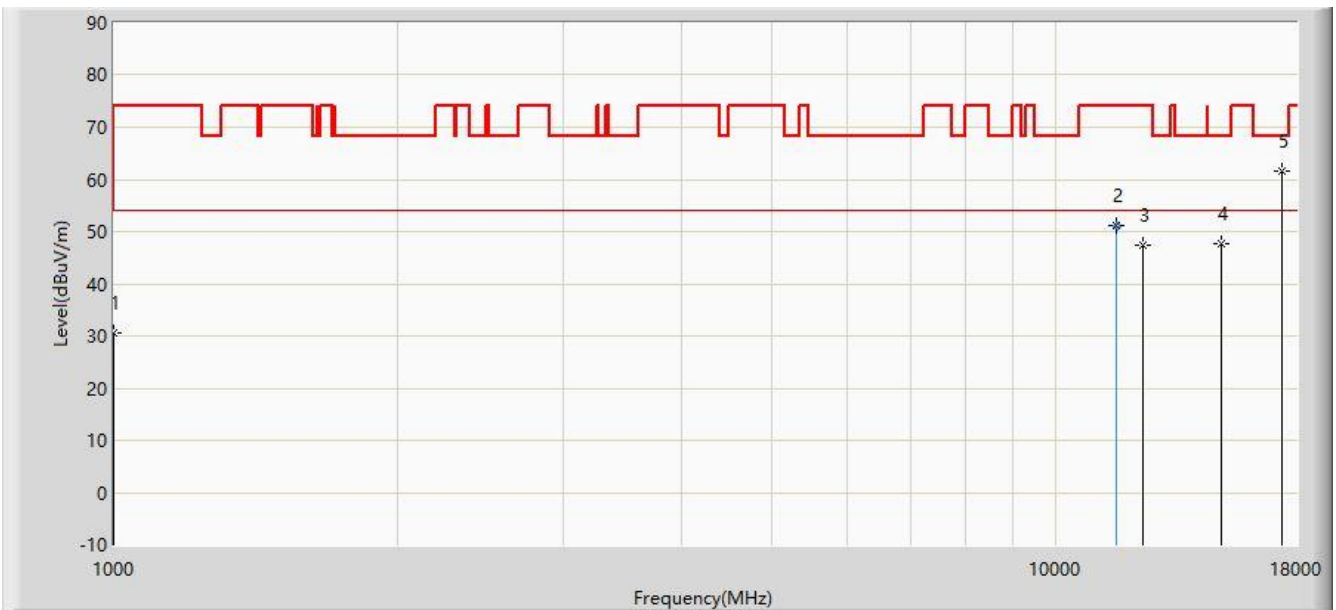

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			1000.000	30.668	38.119	-23.332	54.000	-7.451	PK
2		*	11569.900	51.139	33.121	-2.861	54.000	18.018	AV
3			12381.500	47.399	29.590	-26.601	74.000	17.808	PK
4			14948.500	47.795	27.019	-20.405	68.200	20.776	PK
5			17362.500	61.489	32.550	-6.711	68.200	28.939	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)