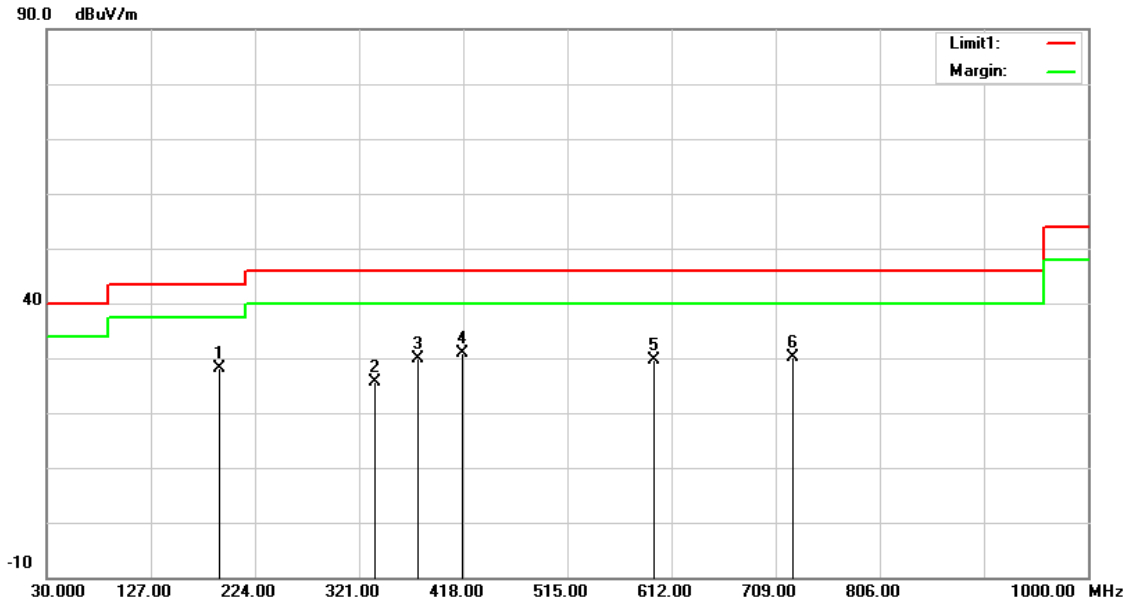
Annex D. Radiated Emission Measurement (5 GHz)

其它不必要之訊號 (1 GHz 以下)

Standard:	LP0002	Test Distance:	3 m
Test item:	Radiated Emission		
Frequency:	5745 MHz		
Mode:	Mode 10		
Ant.Polar.:	Horizontal		



No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	191.0200	36.66	-8.62	28.04	43.50	-15.46	QP
2	335.5500	30.55	-4.89	25.66	46.00	-20.34	QP
3	376.2900	33.74	-3.94	29.80	46.00	-16.20	QP
4	417.0300	34.02	-3.04	30.98	46.00	-15.02	QP
5	595.5100	29.16	0.42	29.58	46.00	-16.42	QP
6	724.5200	27.65	2.53	30.18	46.00	-15.82	QP


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

Example: 28.04 = -8.62 + 36.66

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Radiated Emission		
Frequency:	5745 MHz		
Mode:	Mode 10		
Ant.Polar.:	Vertical		

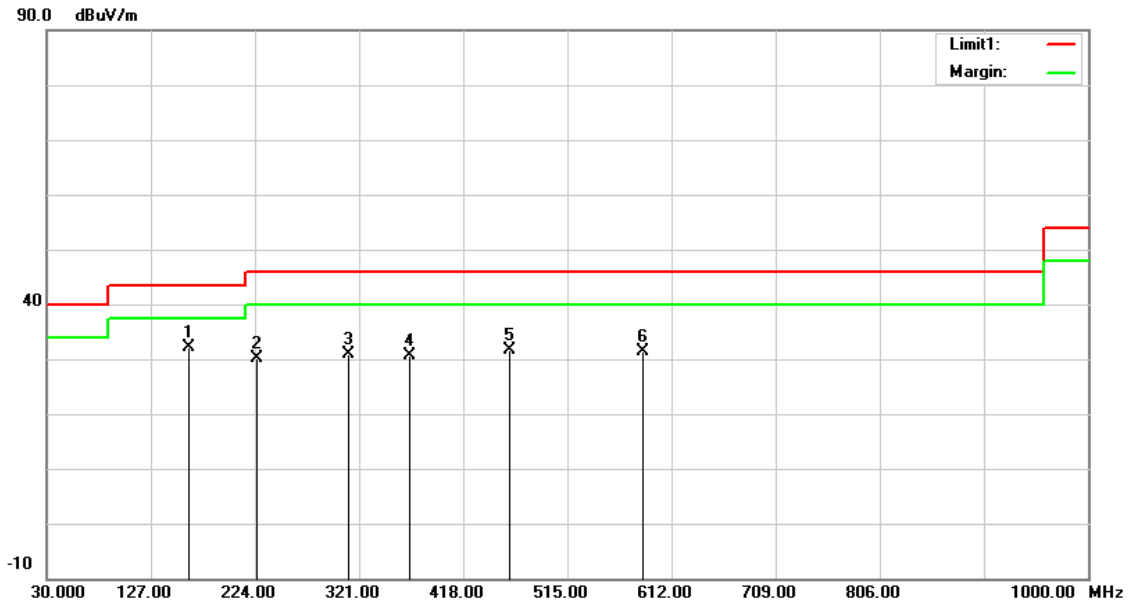

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	162.8900	38.60	-6.52	32.08	43.50	-11.42	QP
2	225.9400	38.41	-8.18	30.23	46.00	-15.77	QP
3	311.3000	36.06	-5.27	30.79	46.00	-15.21	QP
4	367.5600	34.90	-4.18	30.72	46.00	-15.28	QP
5	460.6800	34.10	-2.40	31.70	46.00	-14.30	QP
6	585.8100	31.31	0.14	31.45	46.00	-14.55	QP

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).


Example: 32.08 = -6.52 + 38.60

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

場強輻射量測 (1 GHz 以上)

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5180 MHz		
Mode:	Mode 10		
Ant.Polar.:	Horizontal		

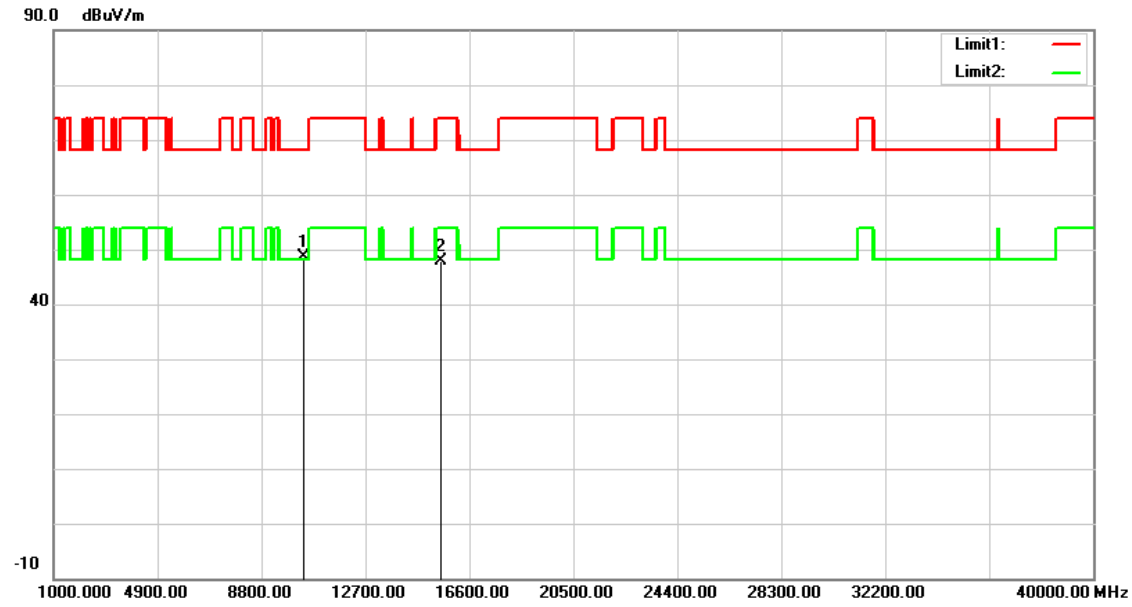

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10360.000	37.04	11.69	48.73	68.20	-19.47	peak
2	15540.000	33.41	14.52	47.93	74.00	-26.07	peak


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

Example: 48.73 = 11.69 + 37.04

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5180 MHz		
Mode:	Mode 10		
Ant.Polar.:	Vertical		

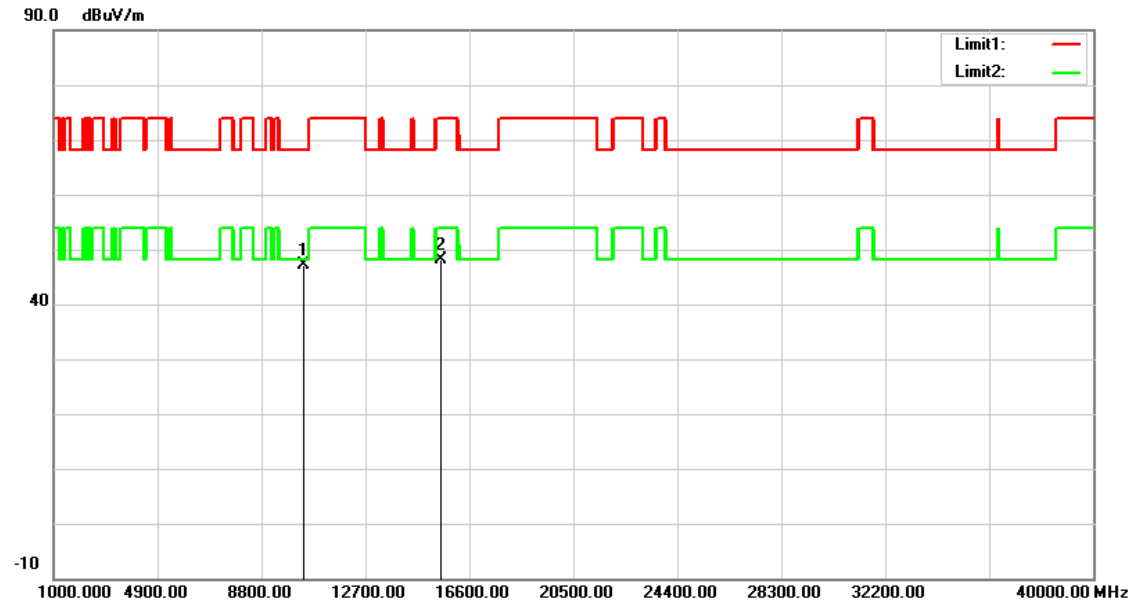

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10360.000	35.33	11.69	47.02	68.20	-21.18	peak
2	15540.000	33.56	14.52	48.08	74.00	-25.92	peak


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

Example: 47.02 = 11.69 + 35.33

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5200 MHz		
Mode:	Mode 10		
Ant.Polar.:	Horizontal		

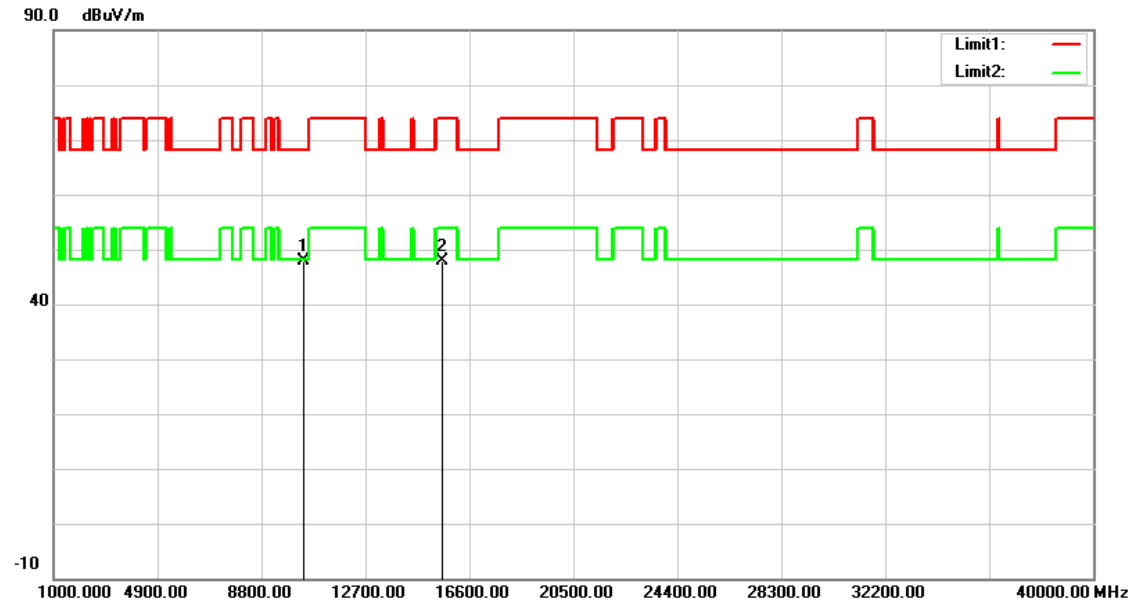


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10400.000	36.12	11.79	47.91	68.20	-20.29	peak
2	15600.000	33.56	14.39	47.95	74.00	-26.05	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5200 MHz		
Mode:	Mode 10		
Ant.Polar.:	Vertical		

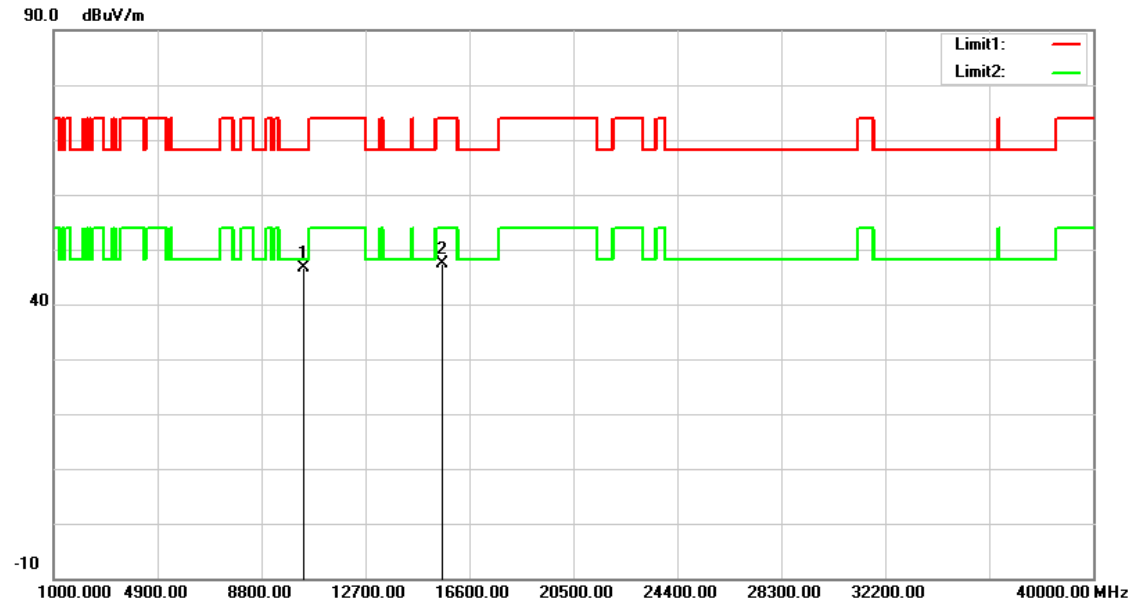


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10400.000	34.95	11.79	46.74	68.20	-21.46	peak
2	15600.000	32.98	14.39	47.37	74.00	-26.63	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5240 MHz		
Mode:	Mode 10		
Ant.Polar.:	Horizontal		

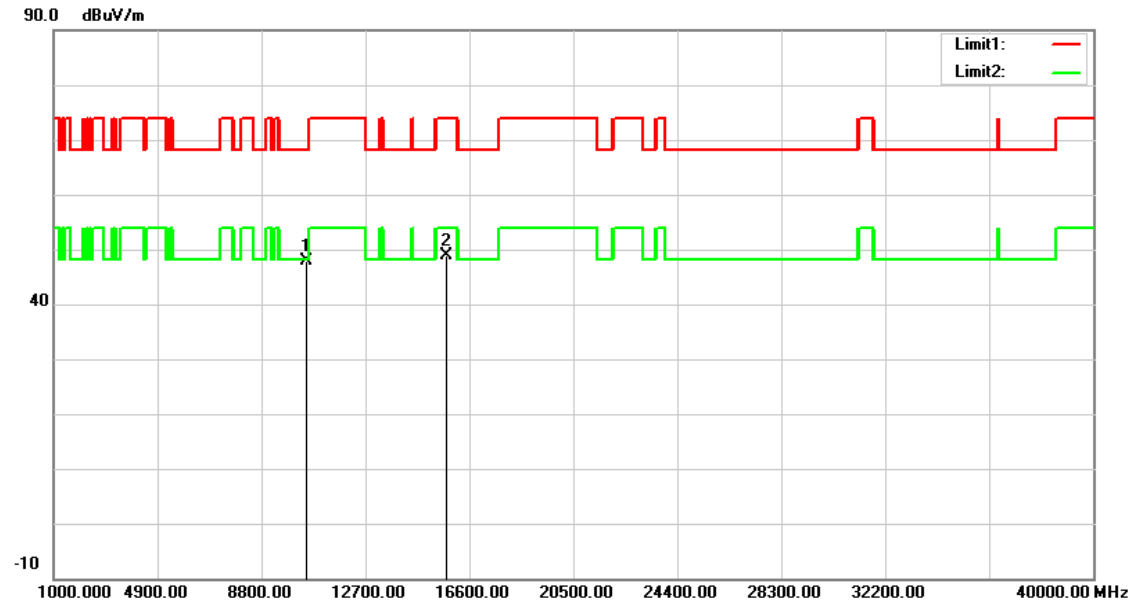


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10480.000	35.99	12.00	47.99	68.20	-20.21	peak
2	15720.000	34.70	14.13	48.83	74.00	-25.17	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5240 MHz		
Mode:	Mode 10		
Ant.Polar.:	Vertical		

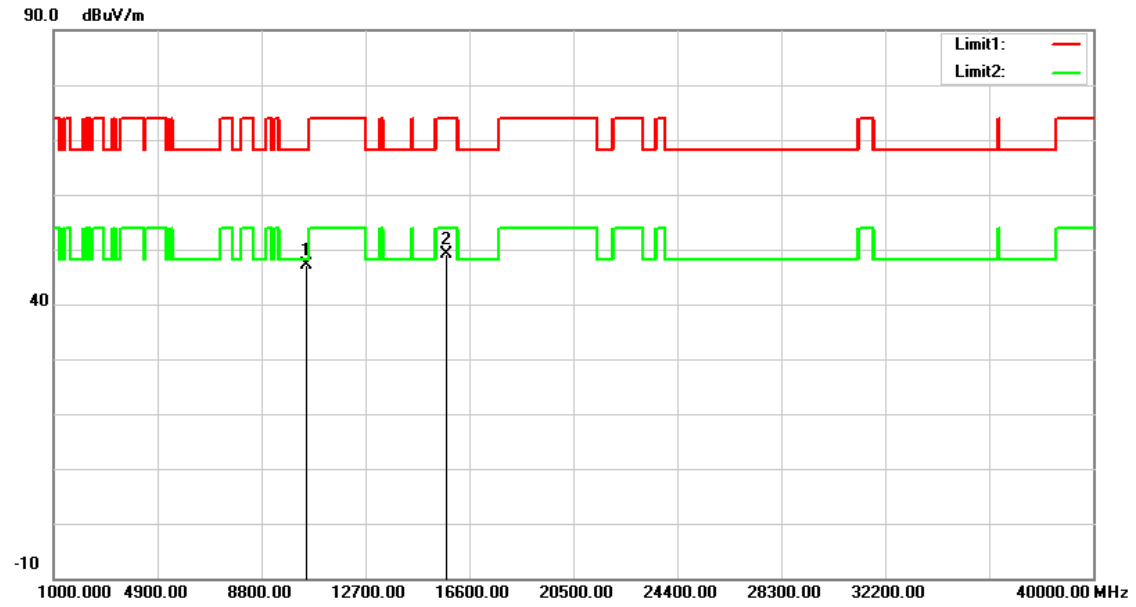


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10480.000	35.02	12.00	47.02	68.20	-21.18	peak
2	15720.000	35.06	14.13	49.19	74.00	-24.81	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5260 MHz		
Mode:	Mode 10		
Ant.Polar.:	Horizontal		

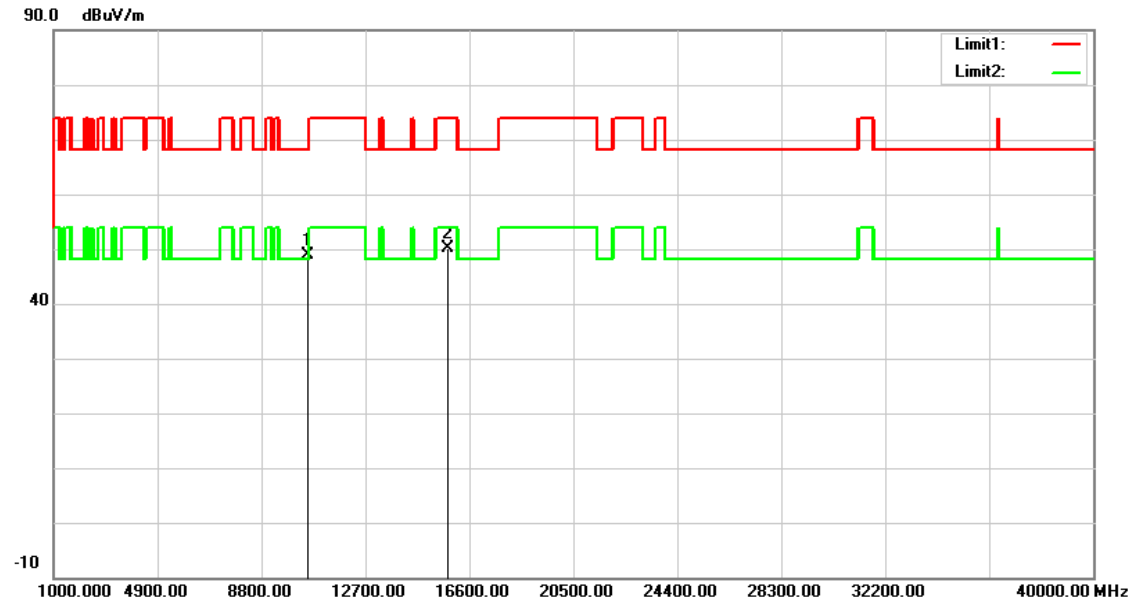


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10520.000	33.06	15.79	48.85	68.20	-19.35	peak
2	15780.000	32.22	17.92	50.14	74.00	-23.86	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5260 MHz		
Mode:	Mode 10		
Ant.Polar.:	Vertical		

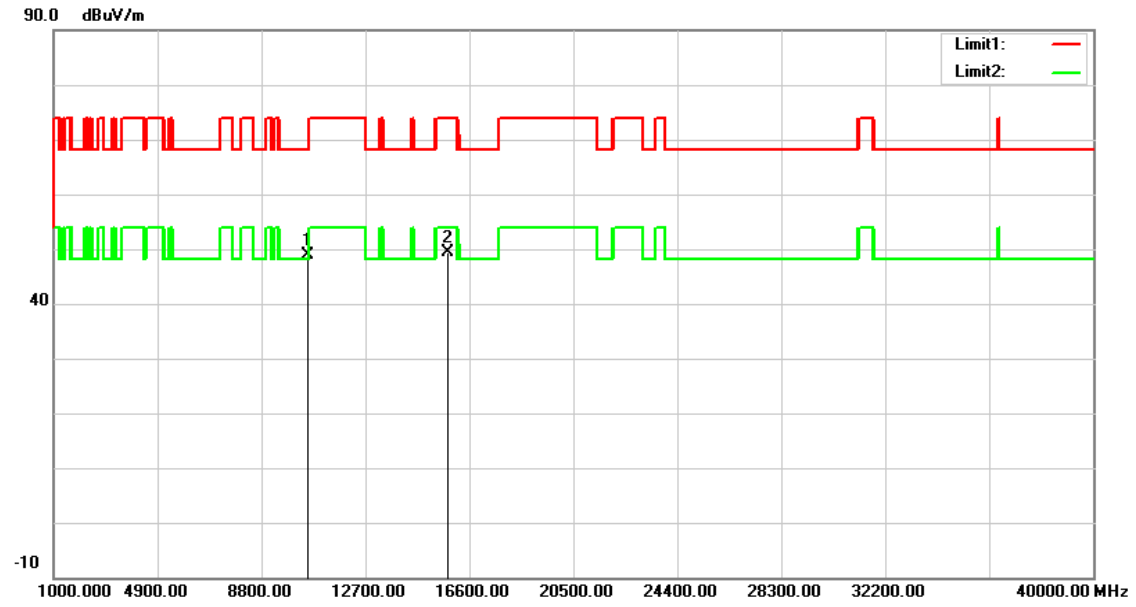


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10520.000	33.18	15.79	48.97	68.20	-19.23	peak
2	15780.000	31.38	17.92	49.30	74.00	-24.70	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5280 MHz		
Mode:	Mode 10		
Ant.Polar.:	Horizontal		

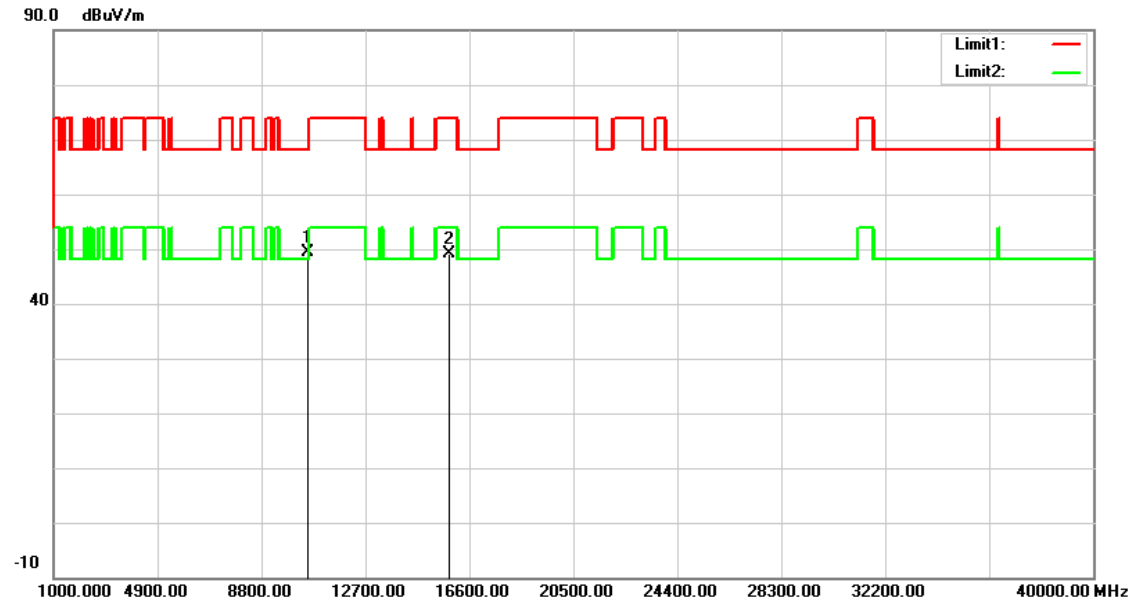


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10560.000	33.49	15.85	49.34	68.20	-18.86	peak
2	15840.000	31.31	17.82	49.13	74.00	-24.87	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5280 MHz		
Mode:	Mode 10		
Ant.Polar.:	Vertical		

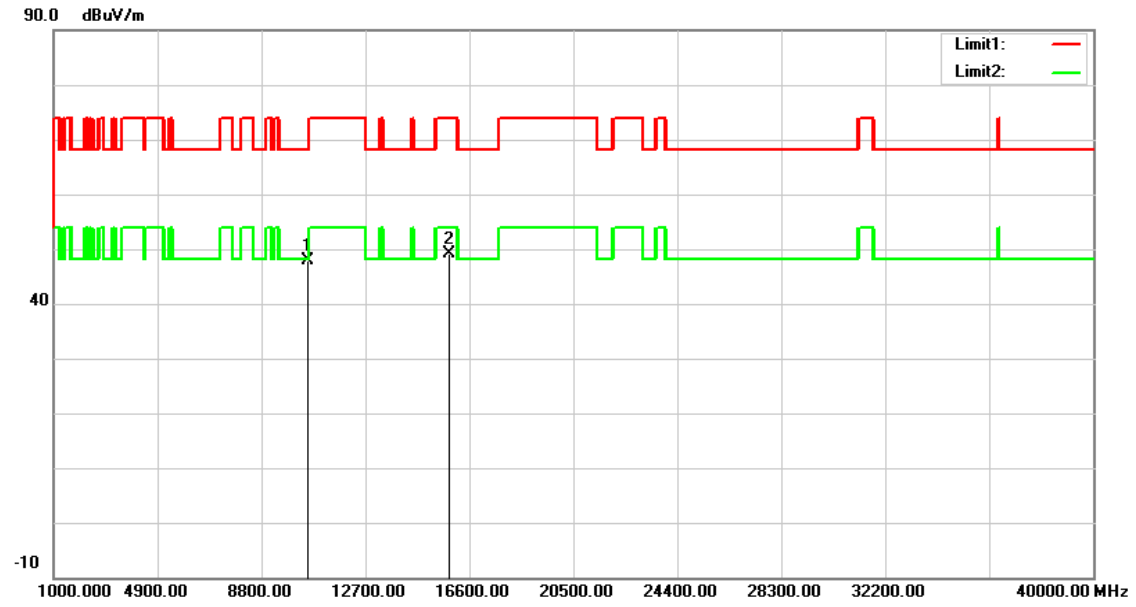


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10560.000	31.97	15.85	47.82	68.20	-20.38	peak
2	15840.000	31.30	17.82	49.12	74.00	-24.88	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5320 MHz		
Mode:	Mode 10		
Ant.Polar.:	Horizontal		

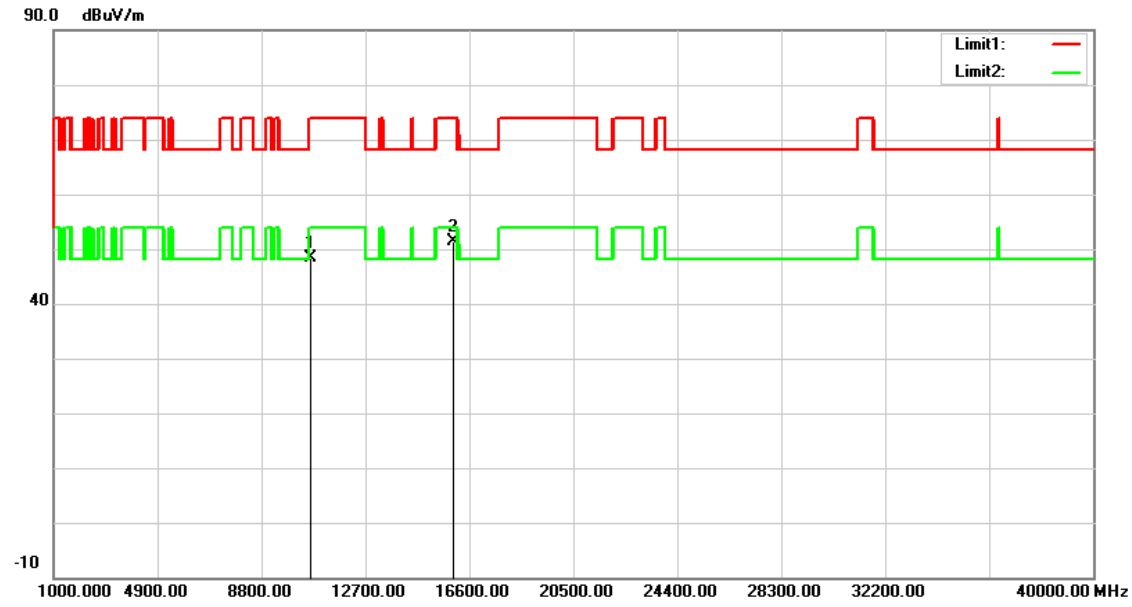


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10640.000	32.44	15.98	48.42	74.00	-25.58	peak
2	15960.000	33.84	17.62	51.46	74.00	-22.54	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5320 MHz		
Mode:	Mode 10		
Ant.Polar.:	Vertical		

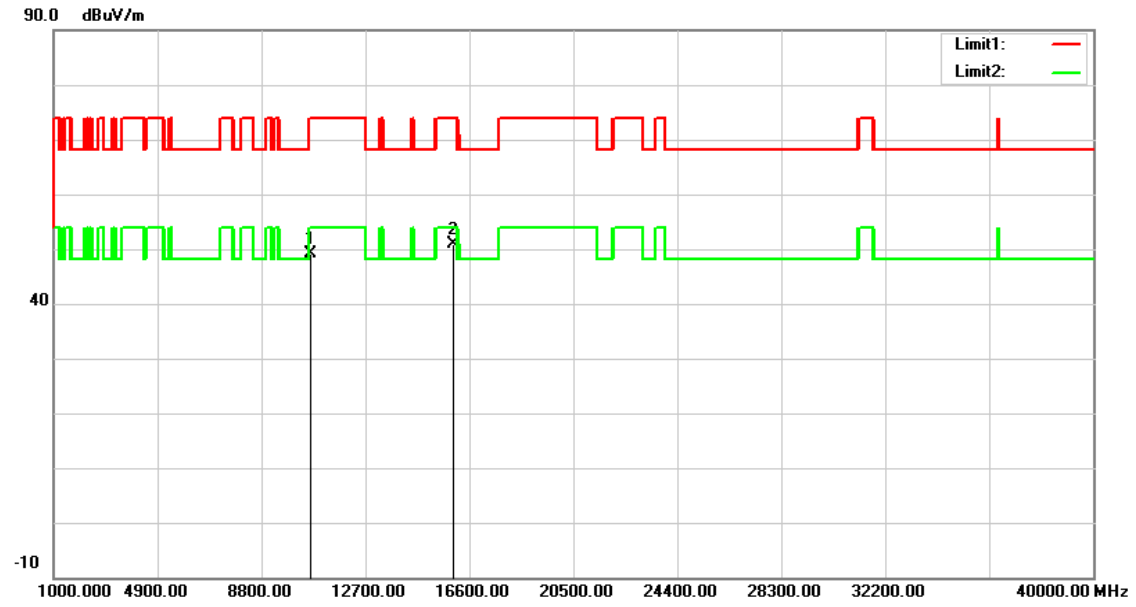


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10640.000	33.03	15.98	49.01	74.00	-24.99	peak
2	15960.000	33.19	17.62	50.81	74.00	-23.19	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5500 MHz		
Mode:	Mode 10		
Ant.Polar.:	Horizontal		

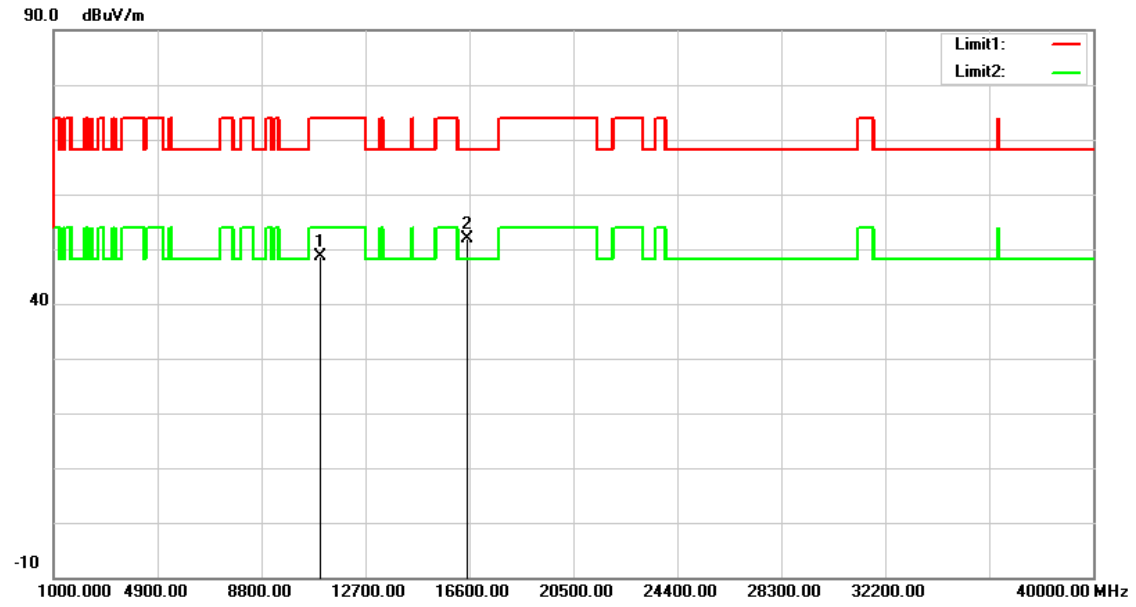


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11000.000	32.12	16.57	48.69	74.00	-25.31	peak
2	16500.000	32.07	19.85	51.92	68.20	-16.28	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5500 MHz		
Mode:	Mode 10		
Ant.Polar.:	Vertical		

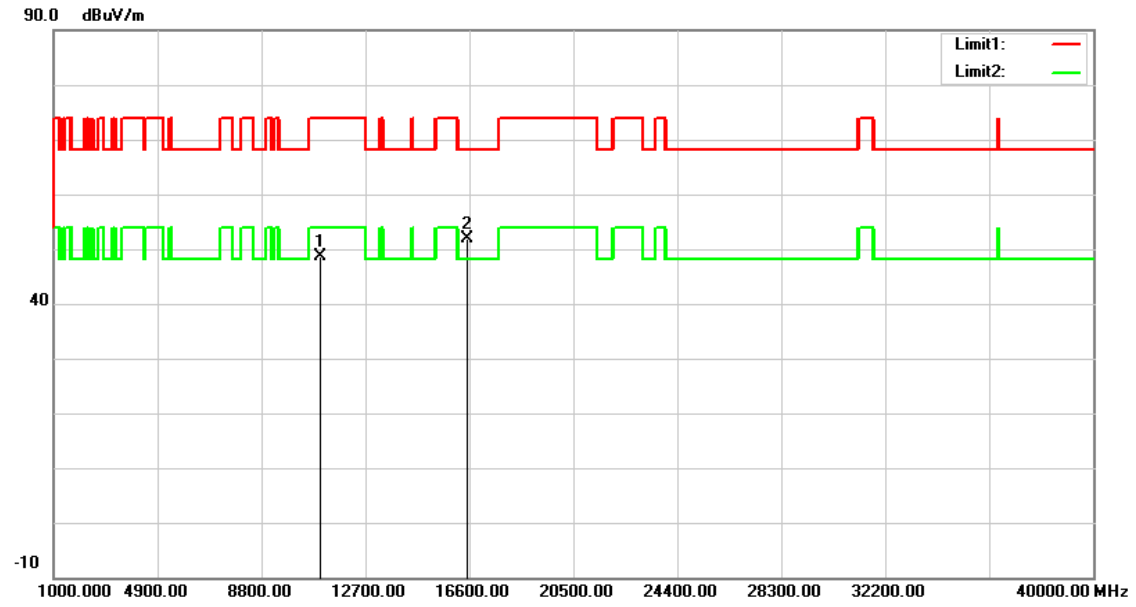


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11000.000	32.10	16.57	48.67	74.00	-25.33	peak
2	16500.000	31.95	19.85	51.80	68.20	-16.40	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5560 MHz		
Mode:	Mode 10		
Ant.Polar.:	Horizontal		

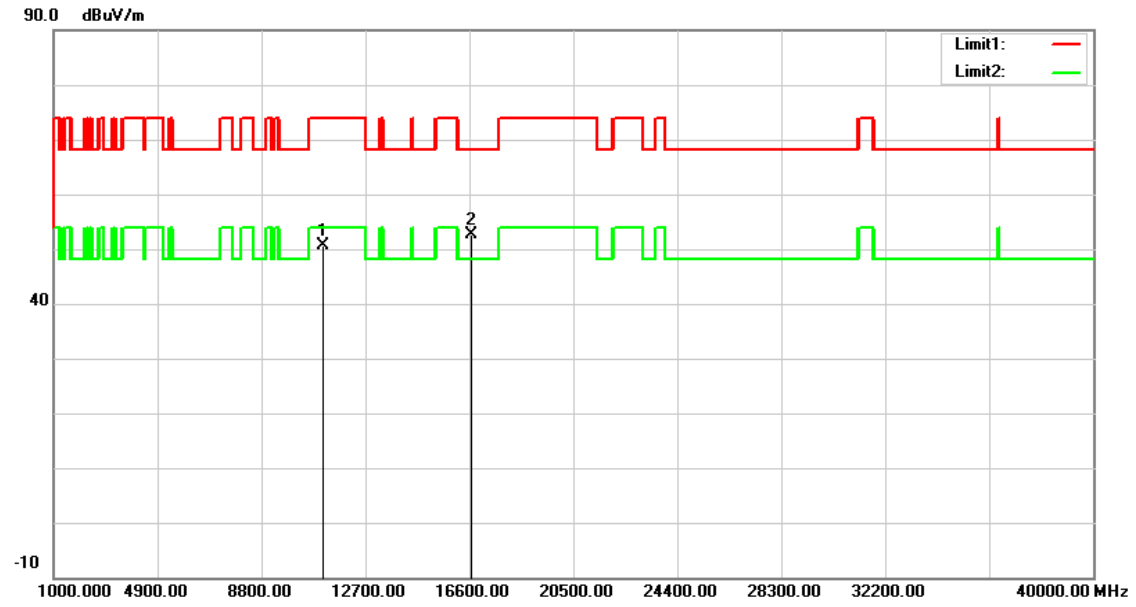


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11120.000	33.93	16.73	50.66	74.00	-23.34	peak
2	16680.000	31.85	20.77	52.62	68.20	-15.58	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5560 MHz		
Mode:	Mode 10		
Ant.Polar.:	Vertical		

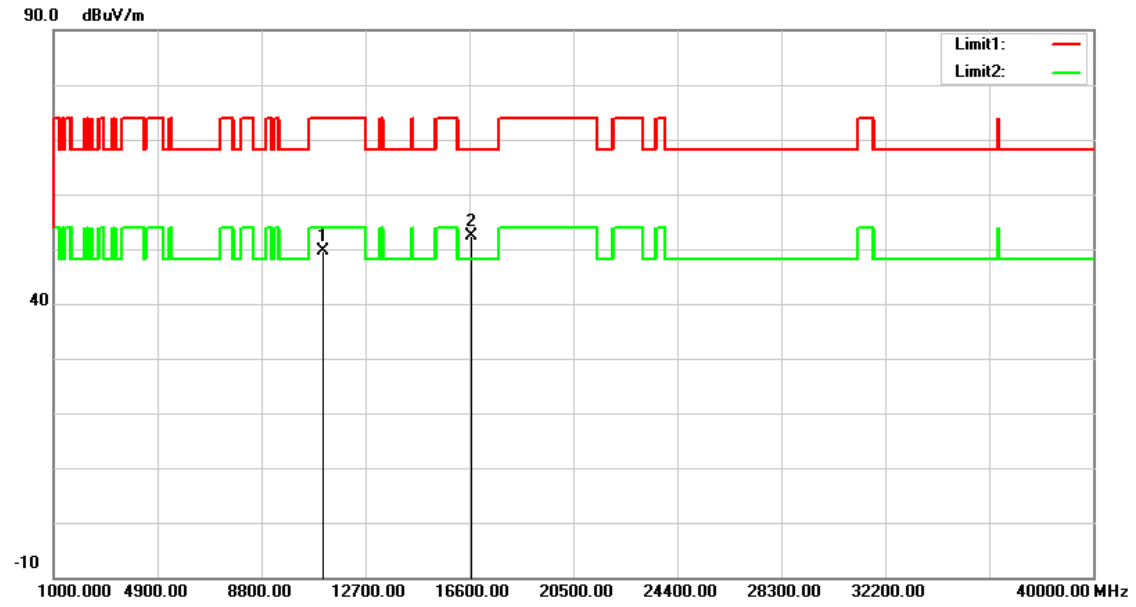


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11120.000	32.87	16.73	49.60	74.00	-24.40	peak
2	16680.000	31.72	20.77	52.49	68.20	-15.71	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5700 MHz		
Mode:	Mode 10		
Ant.Polar.:	Horizontal		

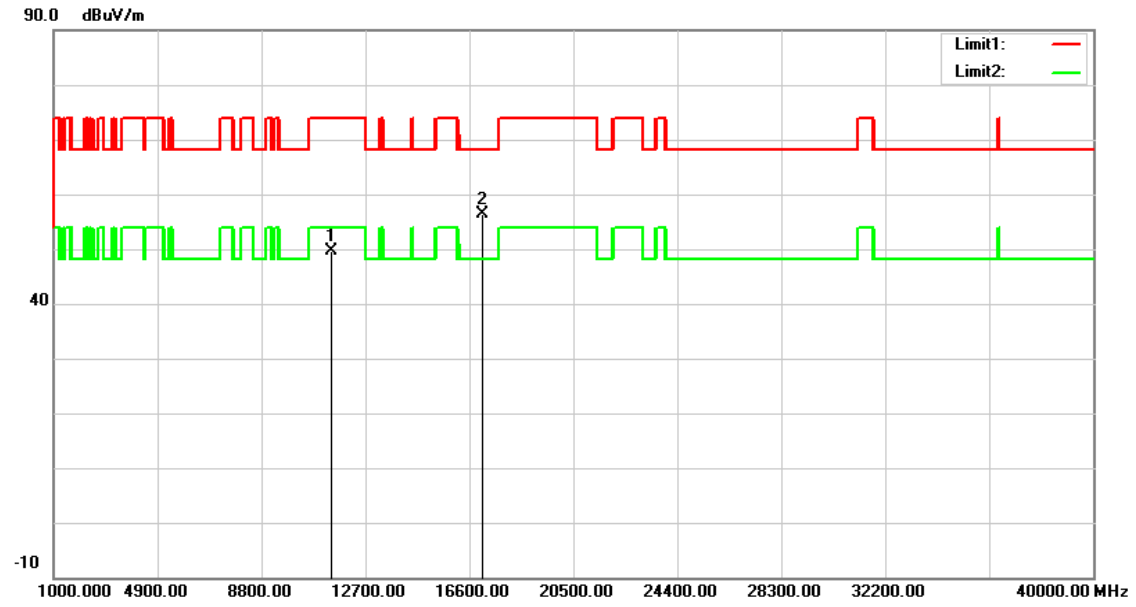


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11400.000	32.51	17.10	49.61	74.00	-24.39	peak
2	17100.000	33.59	22.78	56.37	68.20	-11.83	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5700 MHz		
Mode:	Mode 10		
Ant.Polar.:	Vertical		

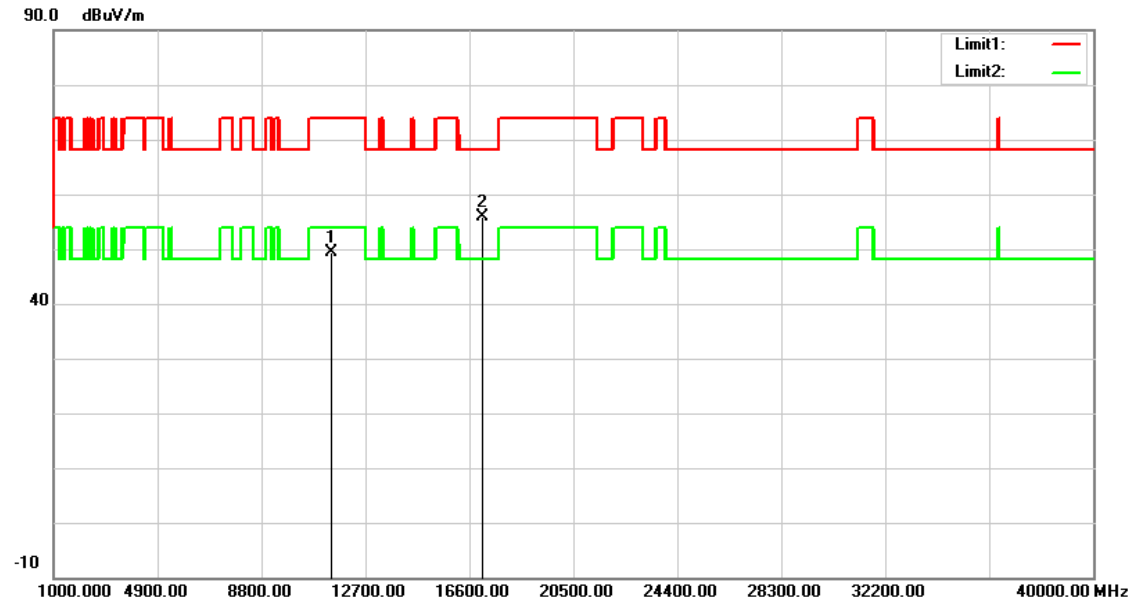


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11400.000	32.40	17.10	49.50	74.00	-24.50	peak
2	17100.000	33.18	22.78	55.96	68.20	-12.24	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5745 MHz		
Mode:	Mode 10		
Ant.Polar.:	Horizontal		

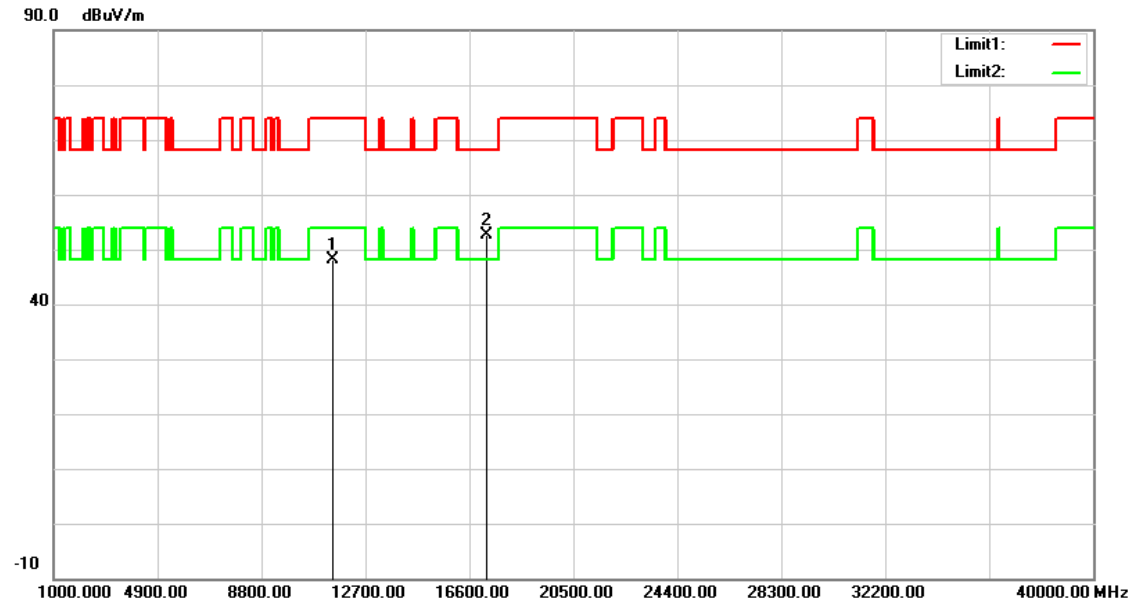


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11490.000	35.44	12.68	48.12	74.00	-25.88	peak
2	17235.000	34.08	18.52	52.60	68.20	-15.60	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5745 MHz		
Mode:	Mode 10		
Ant.Polar.:	Vertical		

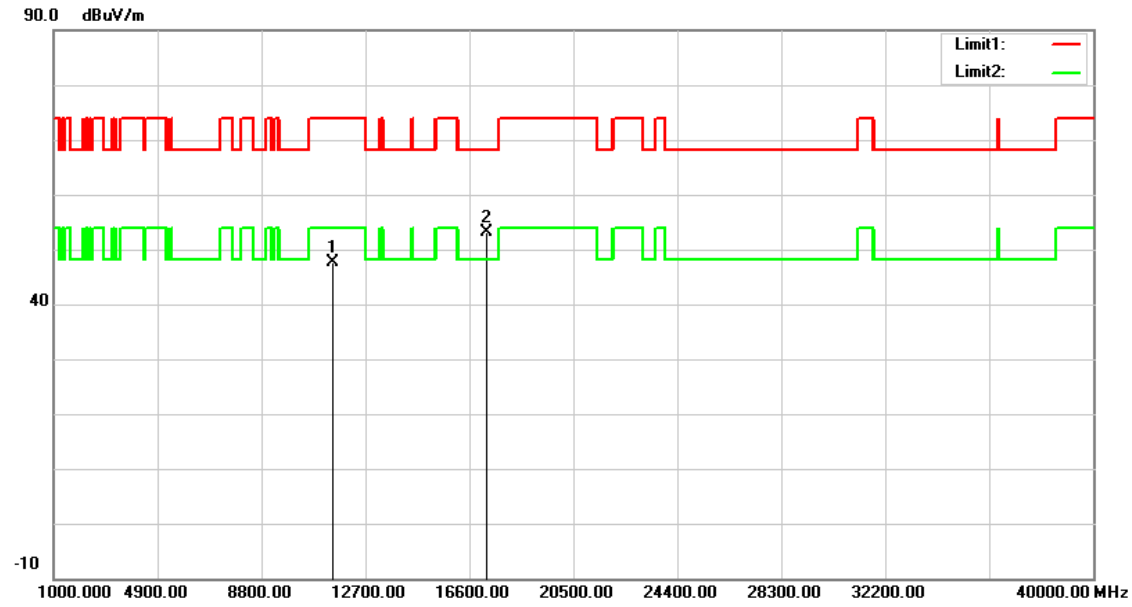


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11490.000	35.04	12.68	47.72	74.00	-26.28	peak
2	17235.000	34.66	18.52	53.18	68.20	-15.02	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5785 MHz		
Mode:	Mode 10		
Ant.Polar.:	Horizontal		

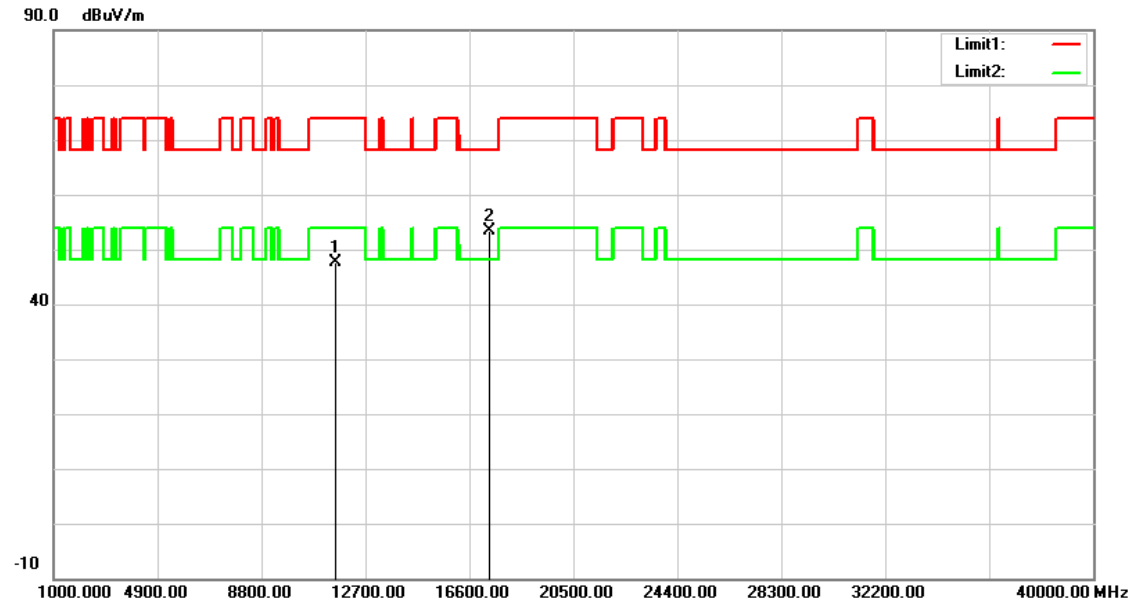


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11570.000	35.09	12.59	47.68	74.00	-26.32	peak
2	17355.000	34.10	19.32	53.42	68.20	-14.78	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5785 MHz		
Mode:	Mode 10		
Ant.Polar.:	Vertical		

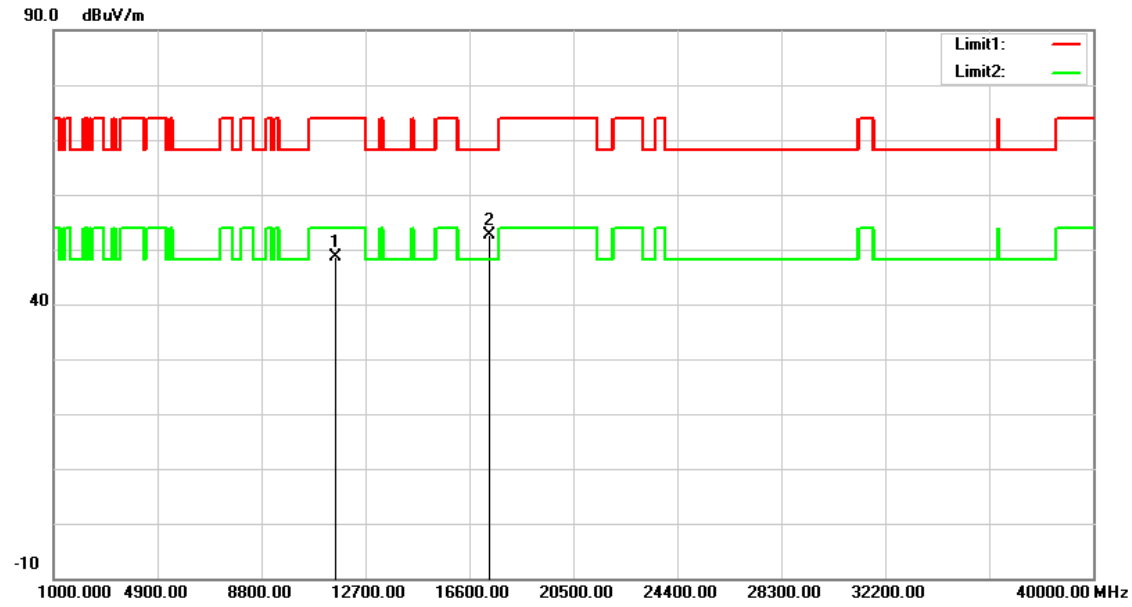


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11570.000	36.05	12.59	48.64	74.00	-25.36	peak
2	17355.000	33.38	19.32	52.70	68.20	-15.50	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5825 MHz		
Mode:	Mode 10		
Ant.Polar.:	Horizontal		

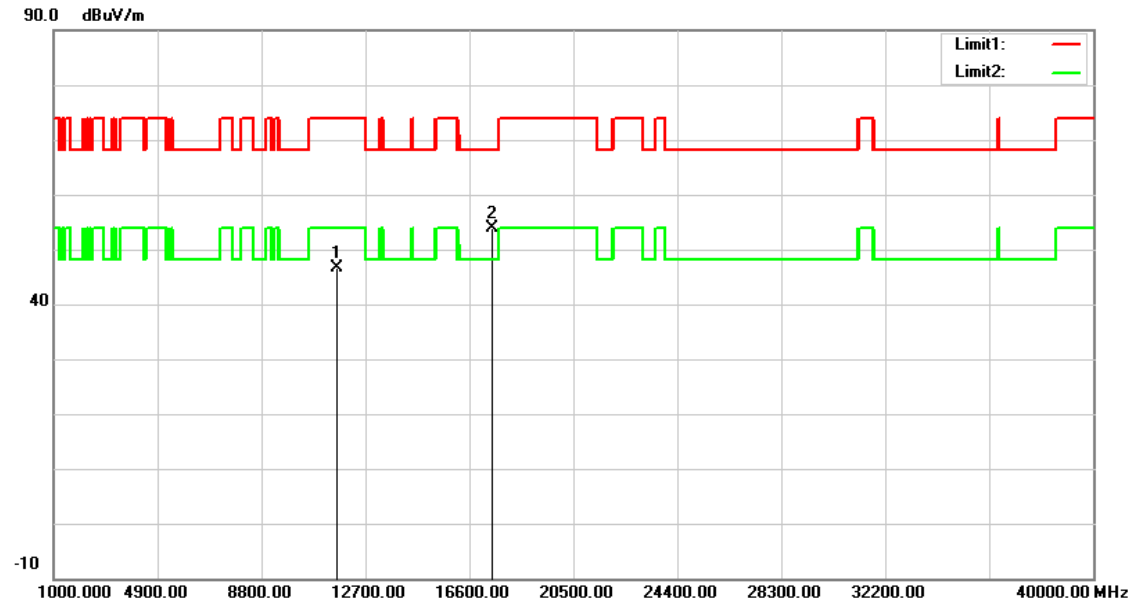


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11650.000	34.27	12.48	46.75	74.00	-27.25	peak
2	17475.000	33.64	20.13	53.77	68.20	-14.43	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5825 MHz		
Mode:	Mode 10		
Ant.Polar.:	Vertical		

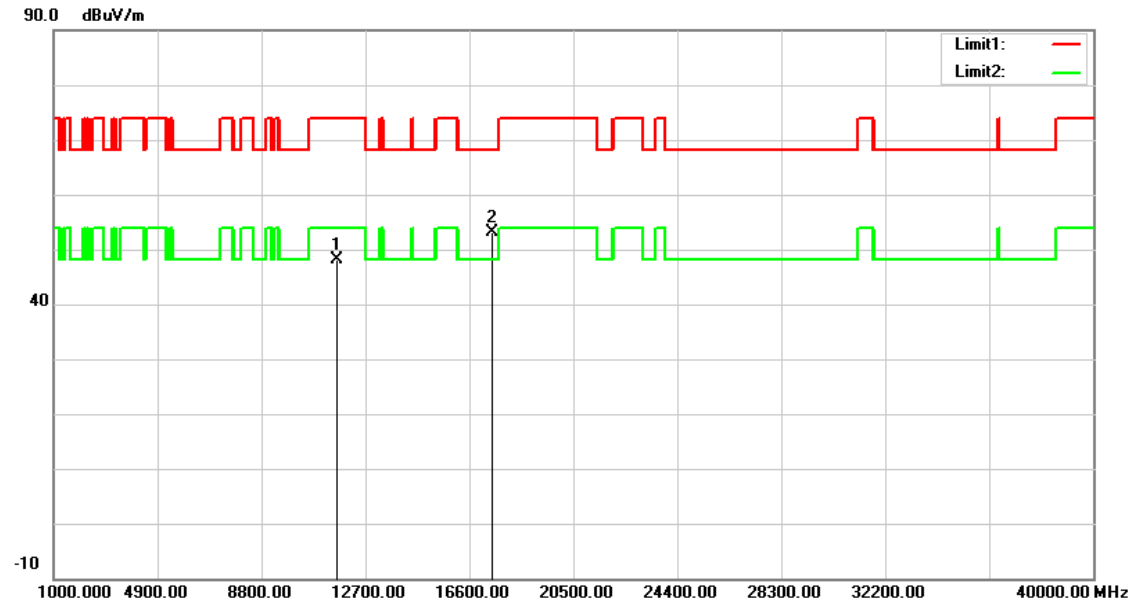


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11650.000	35.63	12.48	48.11	74.00	-25.89	peak
2	17475.000	33.12	20.13	53.25	68.20	-14.95	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5180 MHz		
Mode:	Mode 13		
Ant.Polar.:	Horizontal		

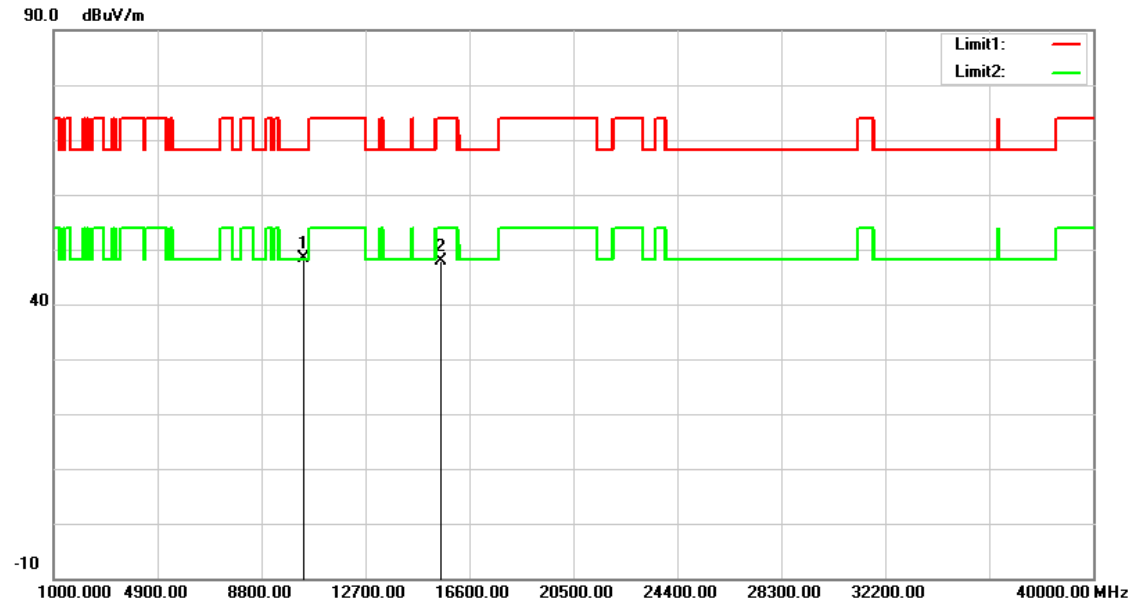


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10360.000	36.68	11.69	48.37	68.20	-19.83	peak
2	15540.000	33.32	14.52	47.84	74.00	-26.16	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5180 MHz		
Mode:	Mode 13		
Ant.Polar.:	Vertical		

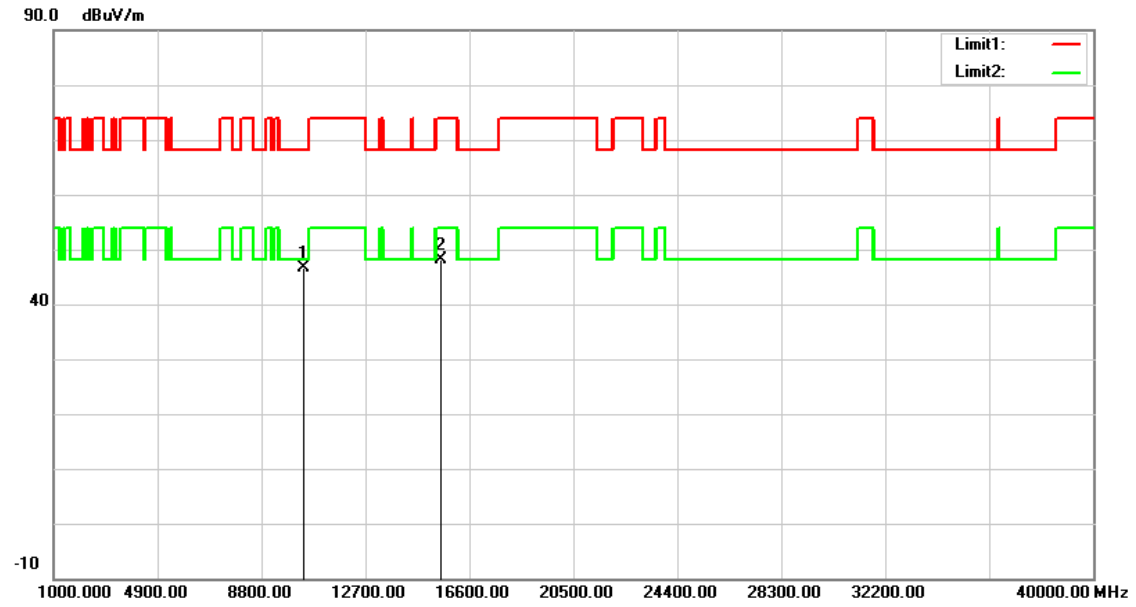


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10360.000	34.84	11.69	46.53	68.20	-21.67	peak
2	15540.000	33.68	14.52	48.20	74.00	-25.80	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5200 MHz		
Mode:	Mode 13		
Ant.Polar.:	Horizontal		

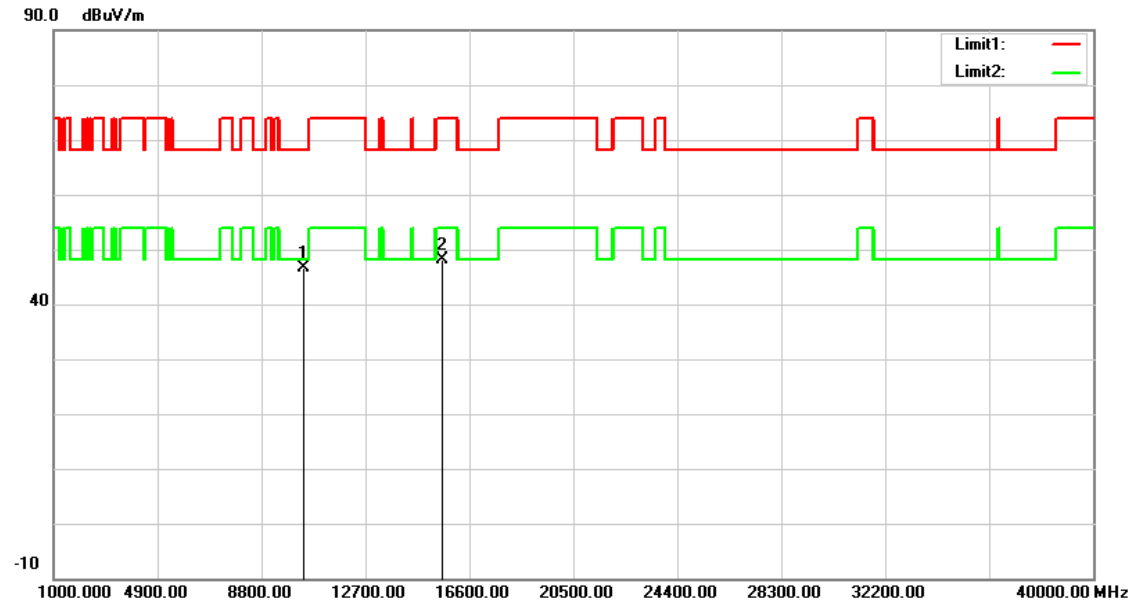


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10400.000	34.79	11.79	46.58	68.20	-21.62	peak
2	15600.000	33.68	14.39	48.07	74.00	-25.93	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5200 MHz		
Mode:	Mode 13		
Ant.Polar.:	Vertical		

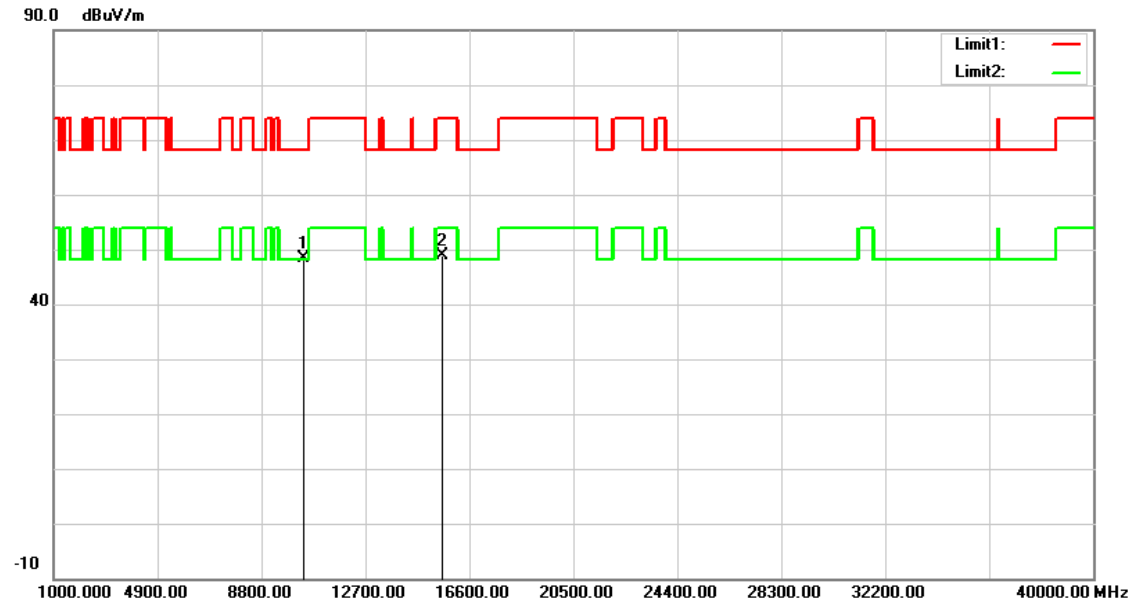


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10400.000	36.48	11.79	48.27	68.20	-19.93	peak
2	15600.000	34.44	14.39	48.83	74.00	-25.17	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5240 MHz		
Mode:	Mode 13		
Ant.Polar.:	Horizontal		

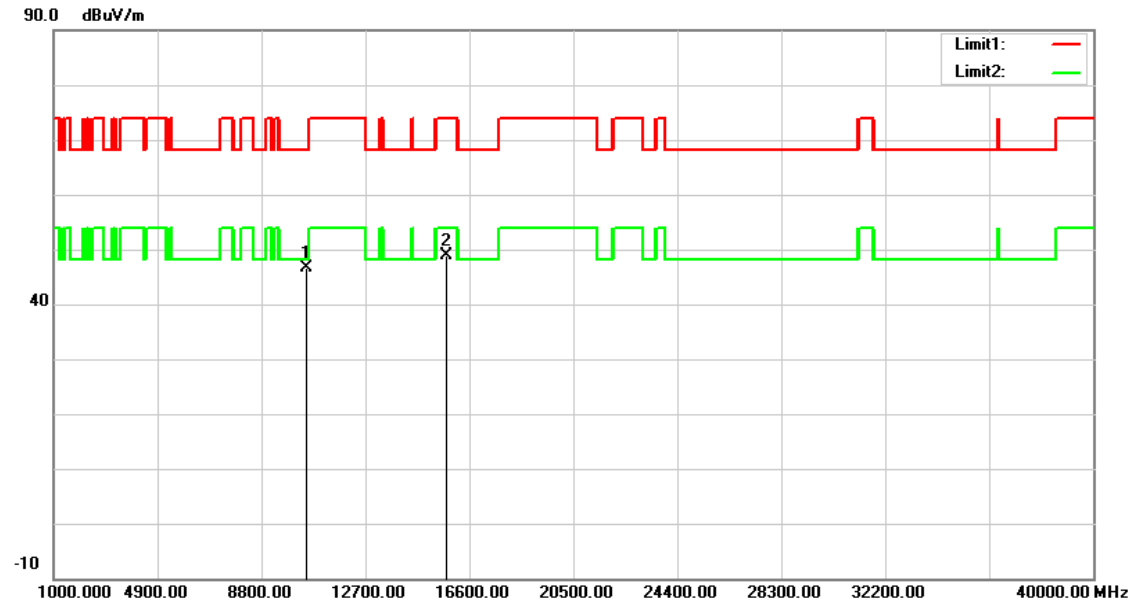


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10480.000	34.57	12.00	46.57	68.20	-21.63	peak
2	15720.000	34.72	14.13	48.85	74.00	-25.15	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5240 MHz		
Mode:	Mode 13		
Ant.Polar.:	Vertical		

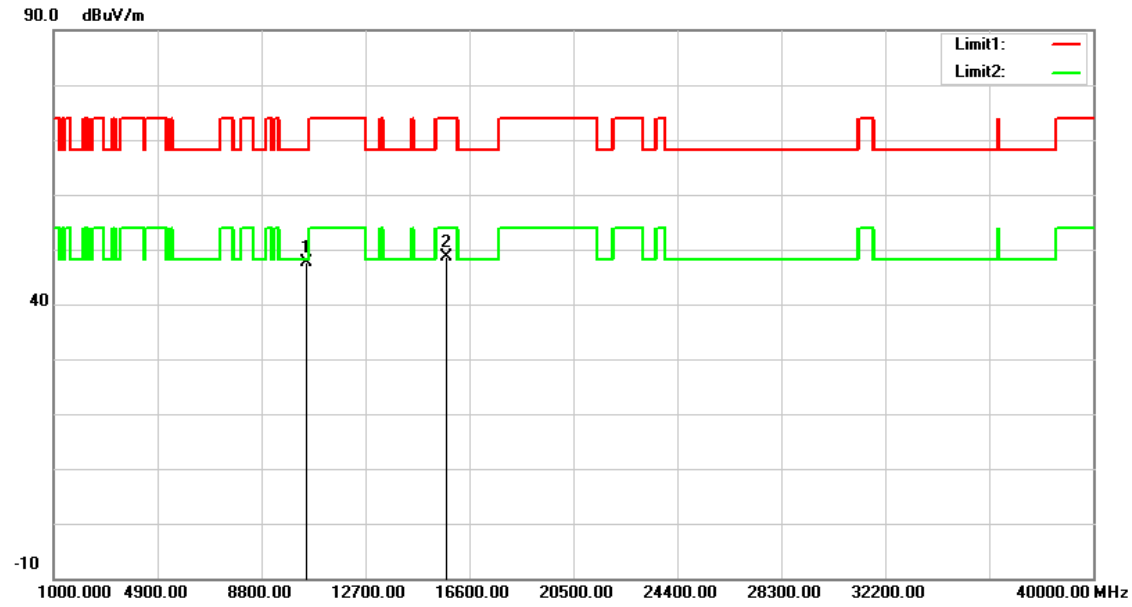


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10480.000	35.70	12.00	47.70	68.20	-20.50	peak
2	15720.000	34.57	14.13	48.70	74.00	-25.30	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5260 MHz		
Mode:	Mode 13		
Ant.Polar.:	Horizontal		

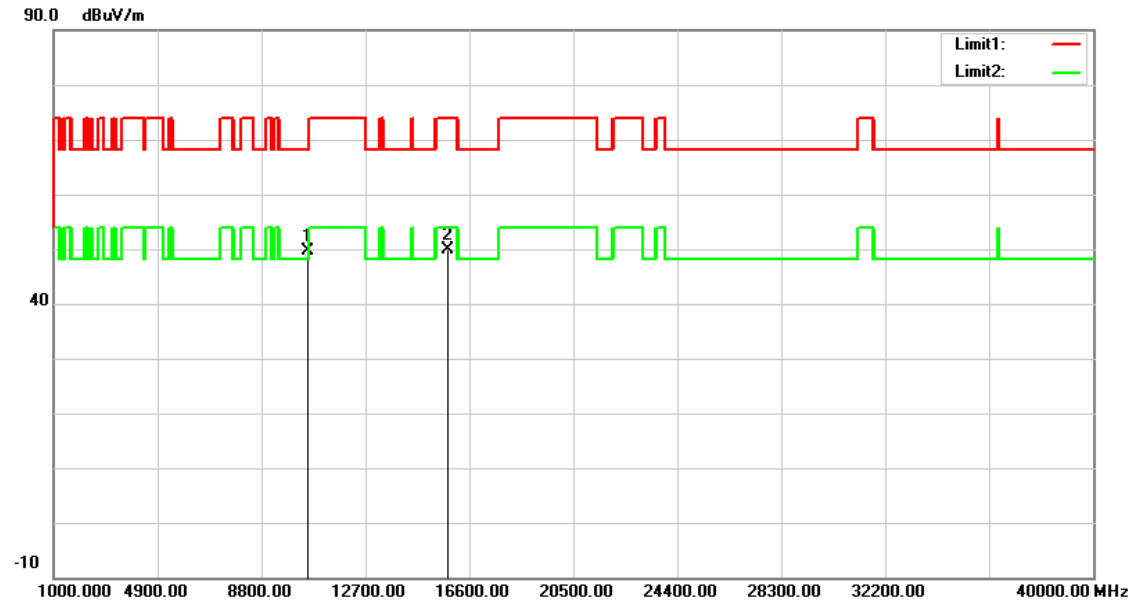


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10520.000	33.88	15.79	49.67	68.20	-18.53	peak
2	15780.000	31.92	17.92	49.84	74.00	-24.16	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5260 MHz		
Mode:	Mode 13		
Ant.Polar.:	Vertical		

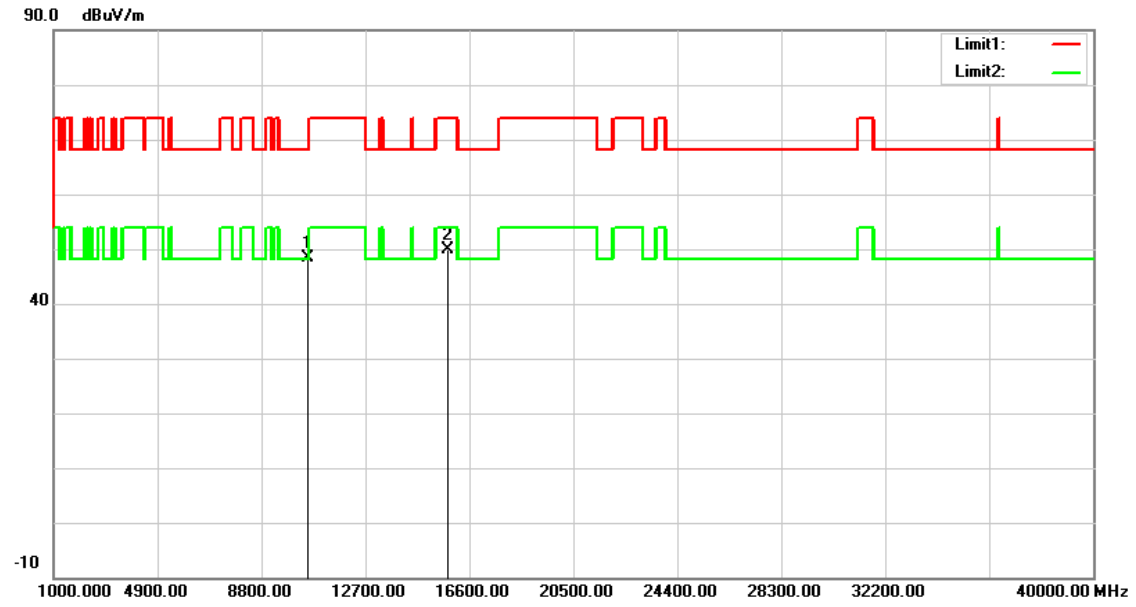


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10520.000	32.52	15.79	48.31	68.20	-19.89	peak
2	15780.000	31.91	17.92	49.83	74.00	-24.17	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5280 MHz		
Mode:	Mode 13		
Ant.Polar.:	Horizontal		

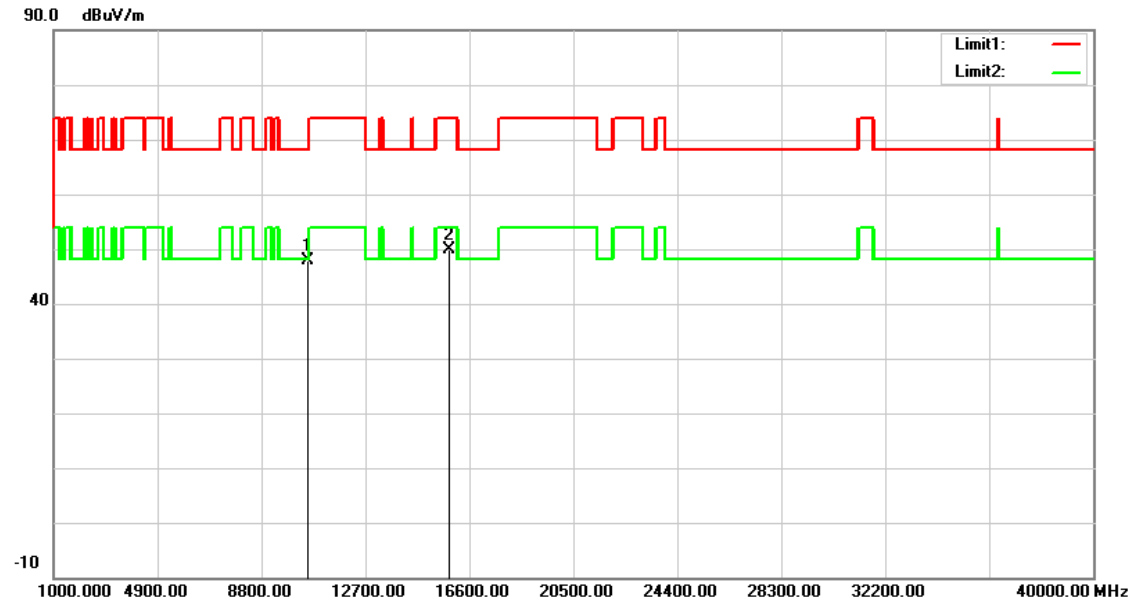


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10560.000	31.92	15.85	47.77	68.20	-20.43	peak
2	15840.000	32.02	17.82	49.84	74.00	-24.16	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5280 MHz		
Mode:	Mode 13		
Ant.Polar.:	Vertical		

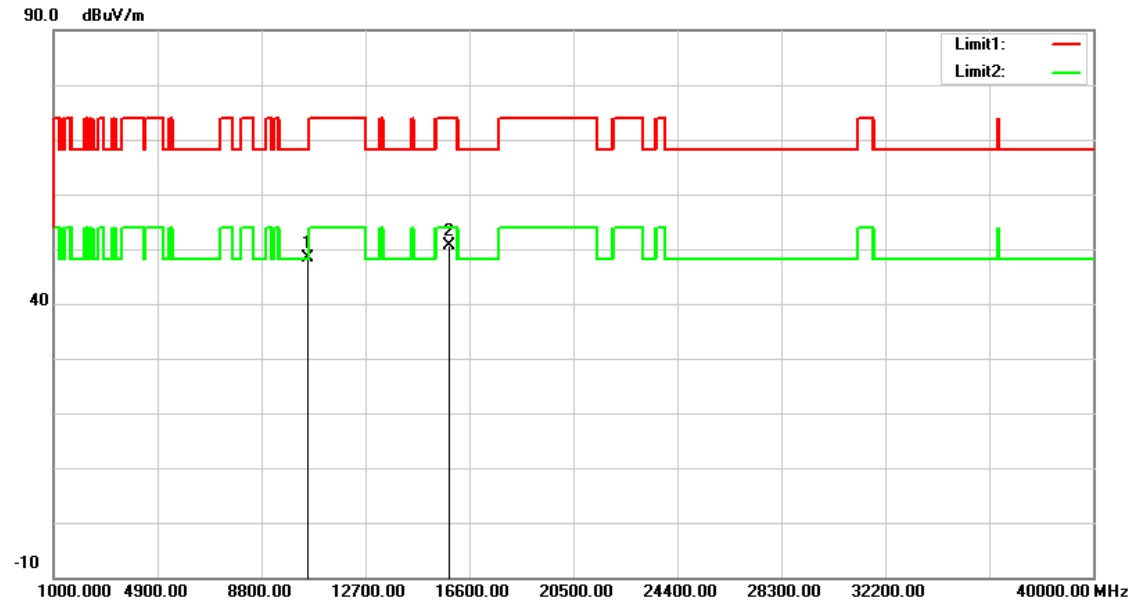


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10560.000	32.51	15.85	48.36	68.20	-19.84	peak
2	15840.000	32.92	17.82	50.74	74.00	-23.26	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5320 MHz		
Mode:	Mode 13		
Ant.Polar.:	Horizontal		

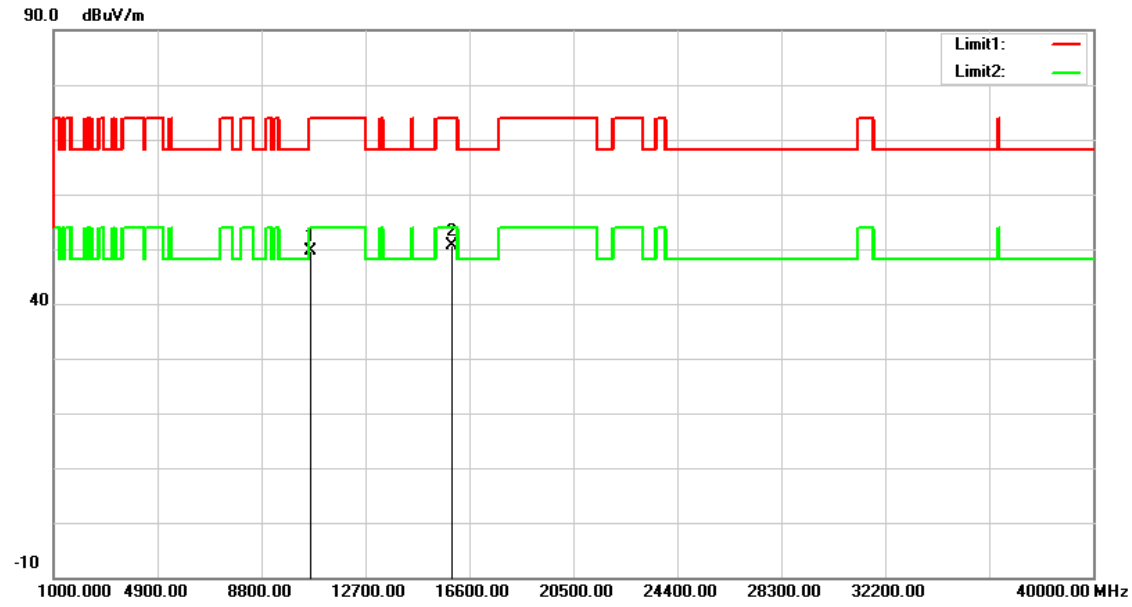


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10640.000	33.64	15.98	49.62	74.00	-24.38	peak
2	15960.000	33.12	17.62	50.74	74.00	-23.26	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5320 MHz		
Mode:	Mode 13		
Ant.Polar.:	Vertical		

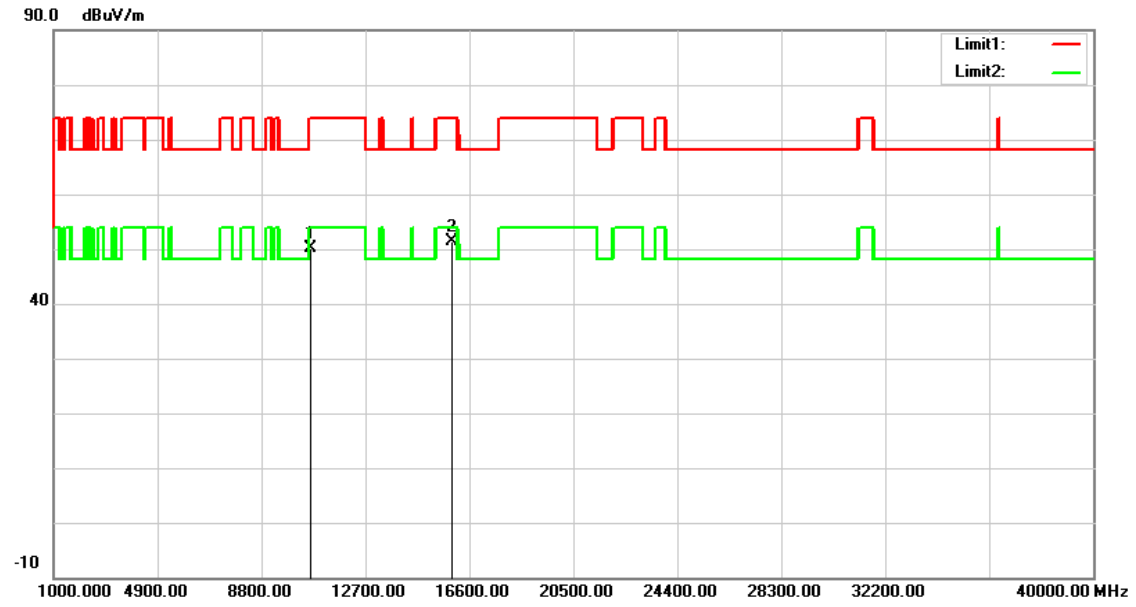


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10640.000	34.16	15.98	50.14	74.00	-23.86	peak
2	15960.000	33.86	17.62	51.48	74.00	-22.52	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5500 MHz		
Mode:	Mode 13		
Ant.Polar.:	Horizontal		

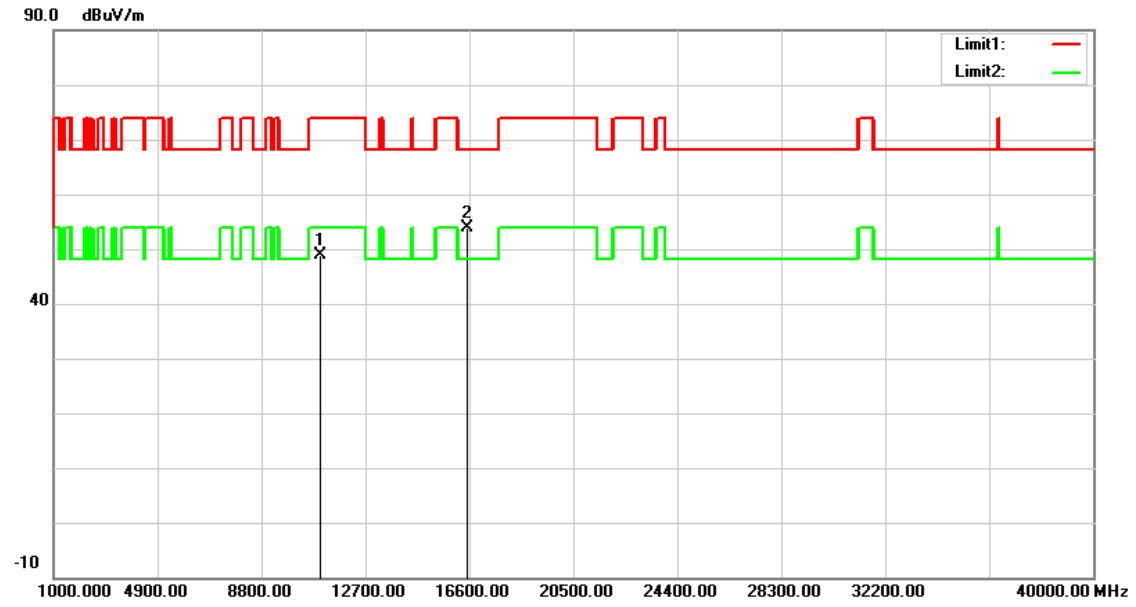


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11000.000	32.20	16.57	48.77	74.00	-25.23	peak
2	16500.000	34.05	19.85	53.90	68.20	-14.30	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5500 MHz		
Mode:	Mode 13		
Ant.Polar.:	Vertical		

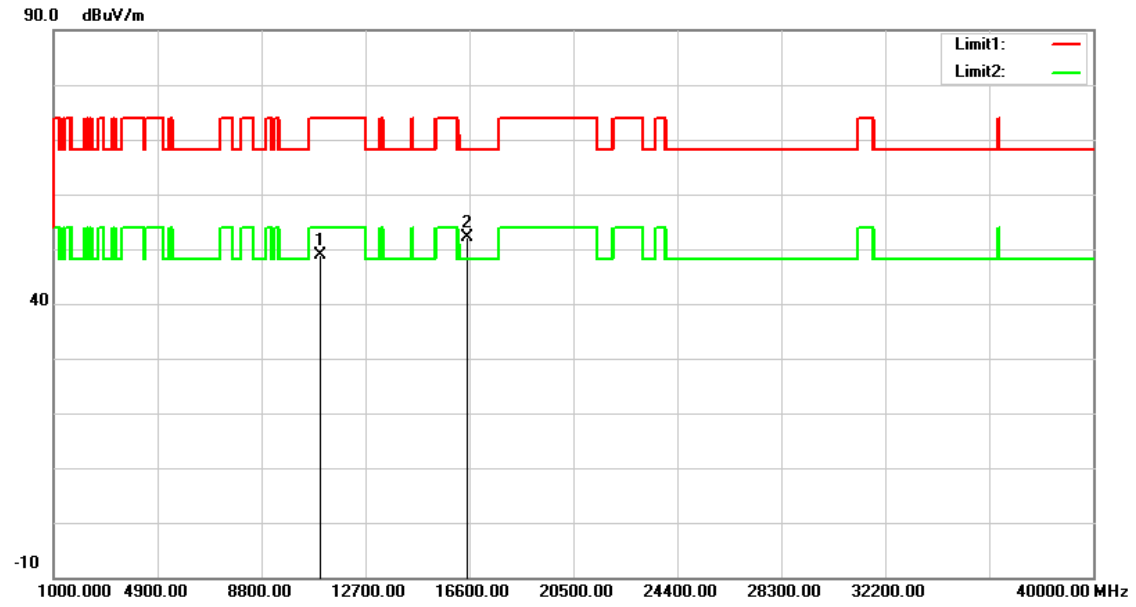


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11000.000	32.22	16.57	48.79	74.00	-25.21	peak
2	16500.000	32.38	19.85	52.23	68.20	-15.97	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5560 MHz		
Mode:	Mode 13		
Ant.Polar.:	Horizontal		

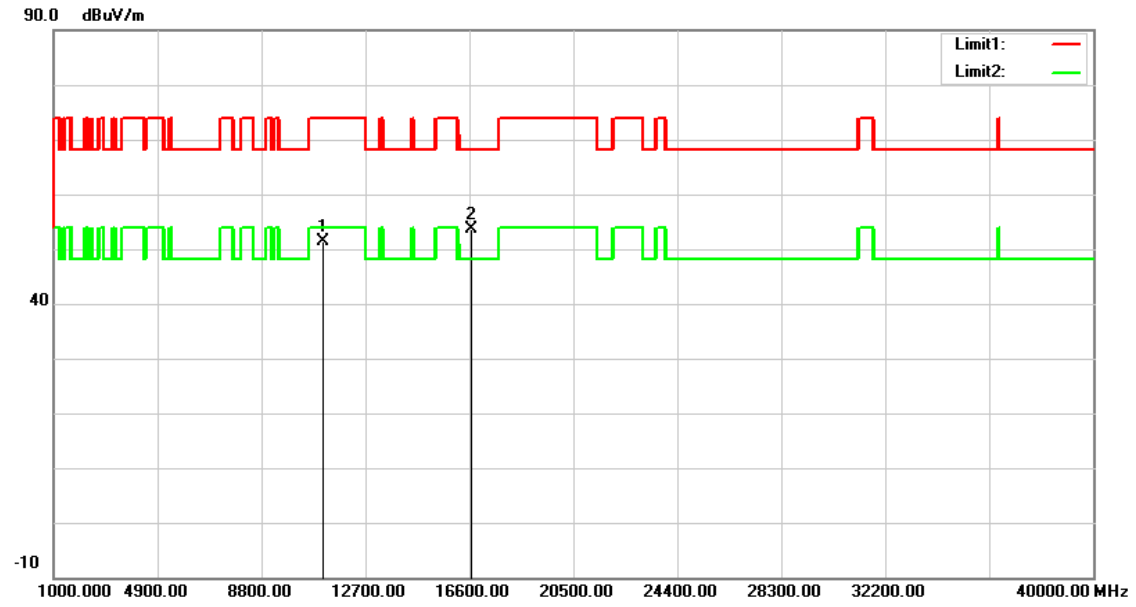


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11120.000	34.65	16.73	51.38	74.00	-22.62	peak
2	16680.000	32.90	20.77	53.67	68.20	-14.53	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5560 MHz		
Mode:	Mode 13		
Ant.Polar.:	Vertical		

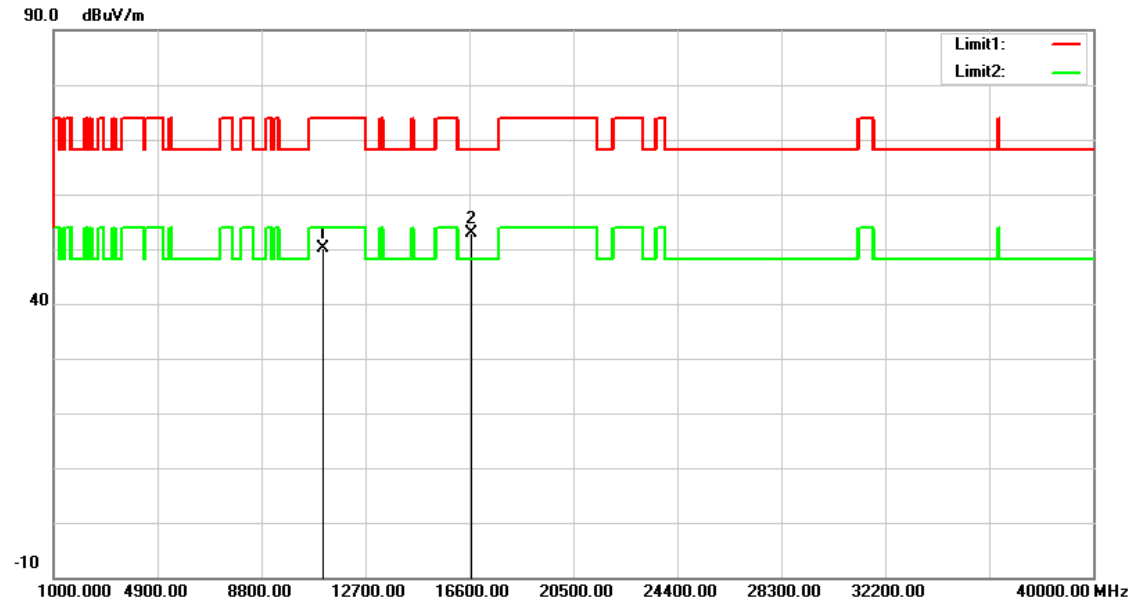


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11120.000	33.47	16.73	50.20	74.00	-23.80	peak
2	16680.000	32.06	20.77	52.83	68.20	-15.37	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5700 MHz		
Mode:	Mode 13		
Ant.Polar.:	Horizontal		

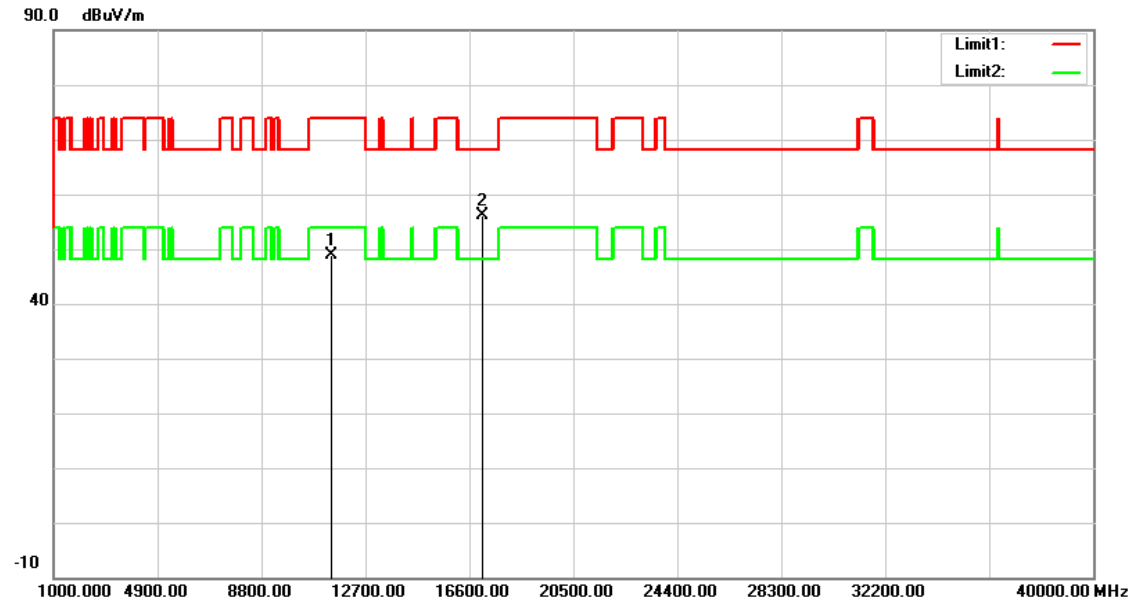


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11400.000	31.87	17.10	48.97	74.00	-25.03	peak
2	17100.000	33.25	22.78	56.03	68.20	-12.17	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5700 MHz		
Mode:	Mode 13		
Ant.Polar.:	Vertical		

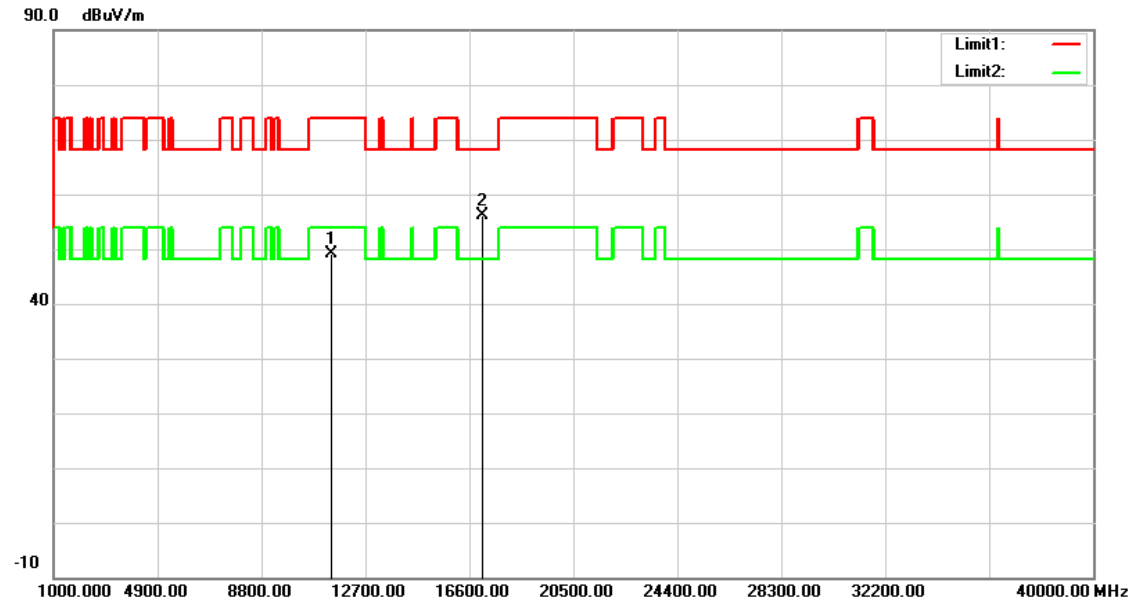


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11400.000	31.92	17.10	49.02	74.00	-24.98	peak
2	17100.000	33.25	22.78	56.03	68.20	-12.17	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5745 MHz		
Mode:	Mode 13		
Ant.Polar.:	Horizontal		

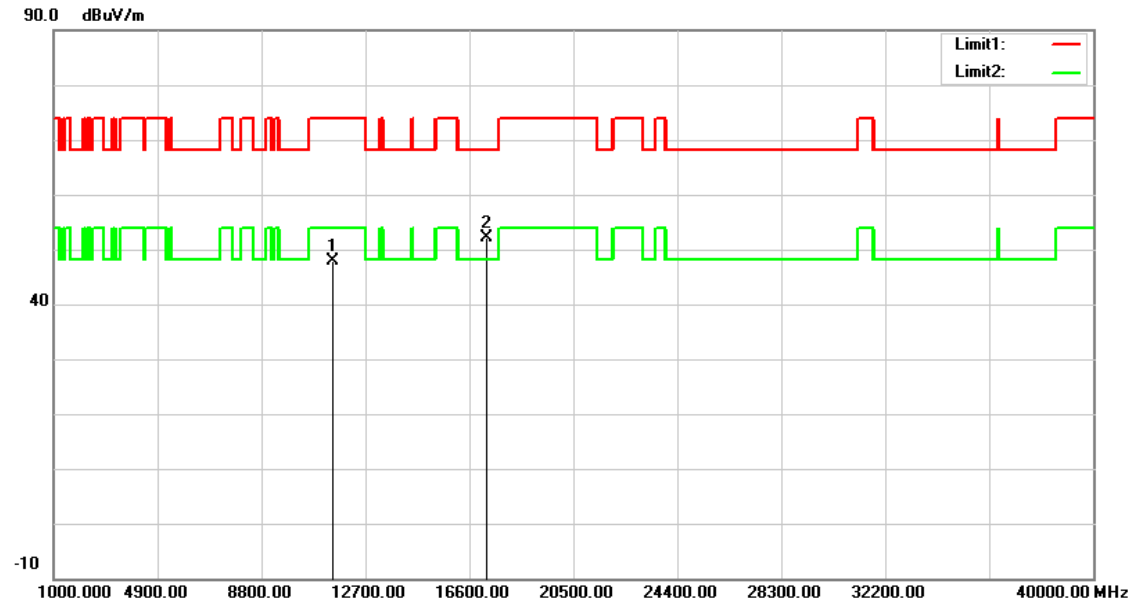


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11490.000	35.15	12.68	47.83	74.00	-26.17	peak
2	17235.000	33.62	18.52	52.14	68.20	-16.06	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5745 MHz		
Mode:	Mode 13		
Ant.Polar.:	Vertical		

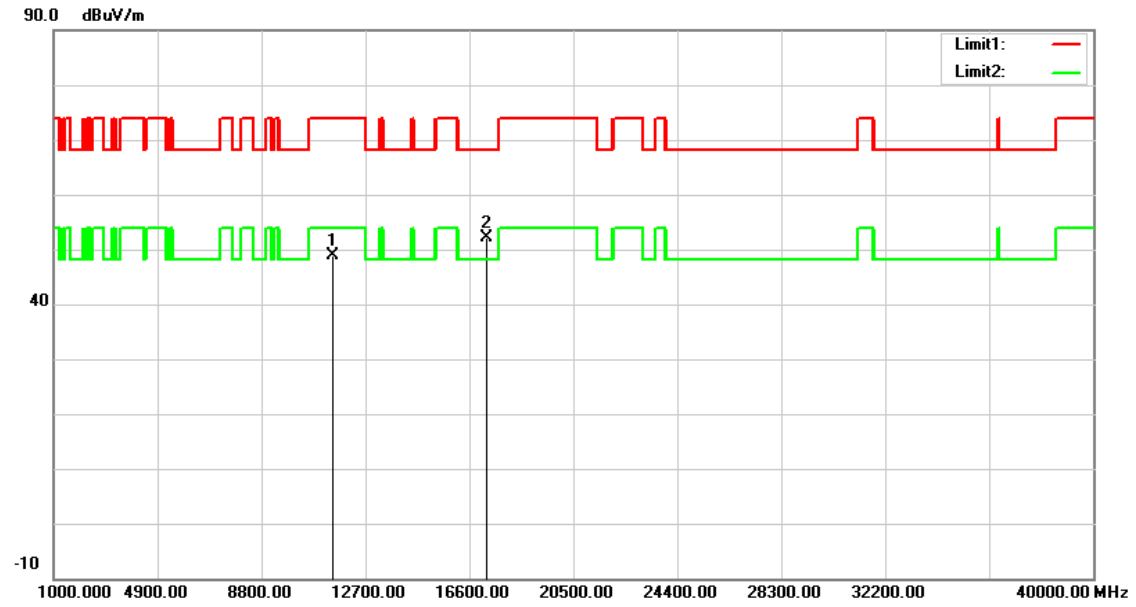


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11490.000	36.14	12.68	48.82	74.00	-25.18	peak
2	17235.000	33.58	18.52	52.10	68.20	-16.10	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5785 MHz		
Mode:	Mode 13		
Ant.Polar.:	Horizontal		

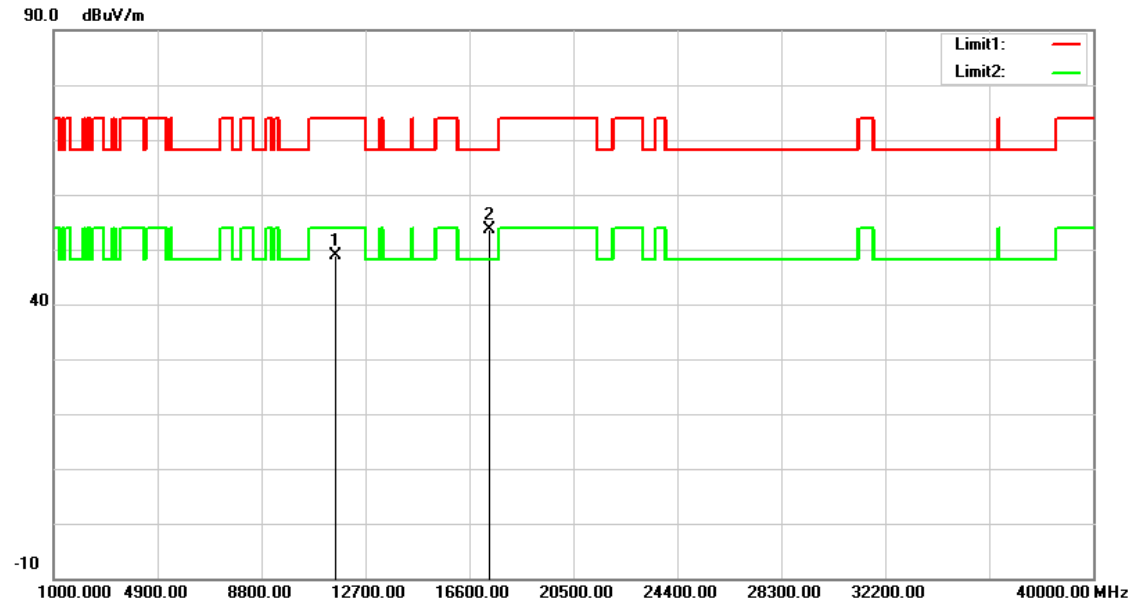


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11570.000	36.31	12.59	48.90	74.00	-25.10	peak
2	17355.000	34.24	19.32	53.56	68.20	-14.64	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5785 MHz		
Mode:	Mode 13		
Ant.Polar.:	Vertical		

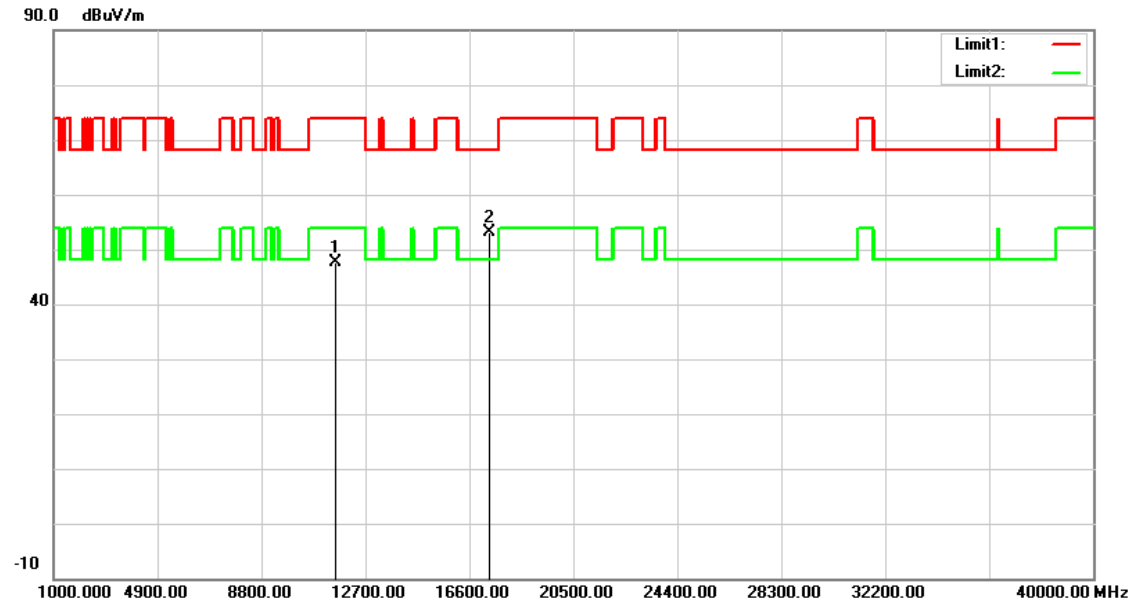


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11570.000	35.15	12.59	47.74	74.00	-26.26	peak
2	17355.000	33.72	19.32	53.04	68.20	-15.16	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5825 MHz		
Mode:	Mode 13		
Ant.Polar.:	Horizontal		

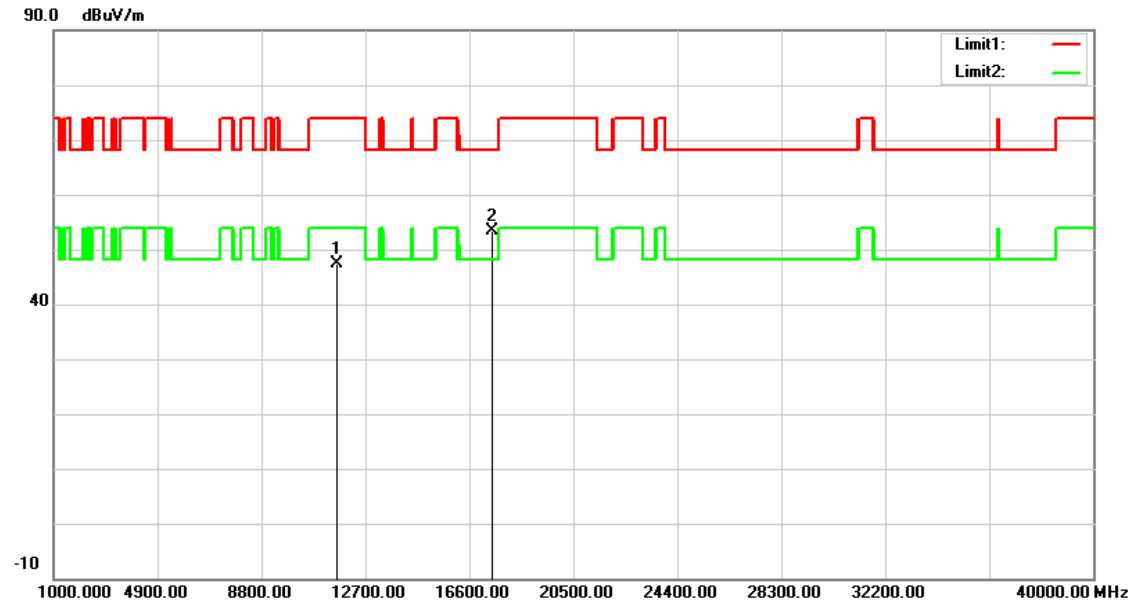


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11650.000	34.92	12.48	47.40	74.00	-26.60	peak
2	17475.000	33.34	20.13	53.47	68.20	-14.73	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5825 MHz		
Mode:	Mode 13		
Ant.Polar.:	Vertical		

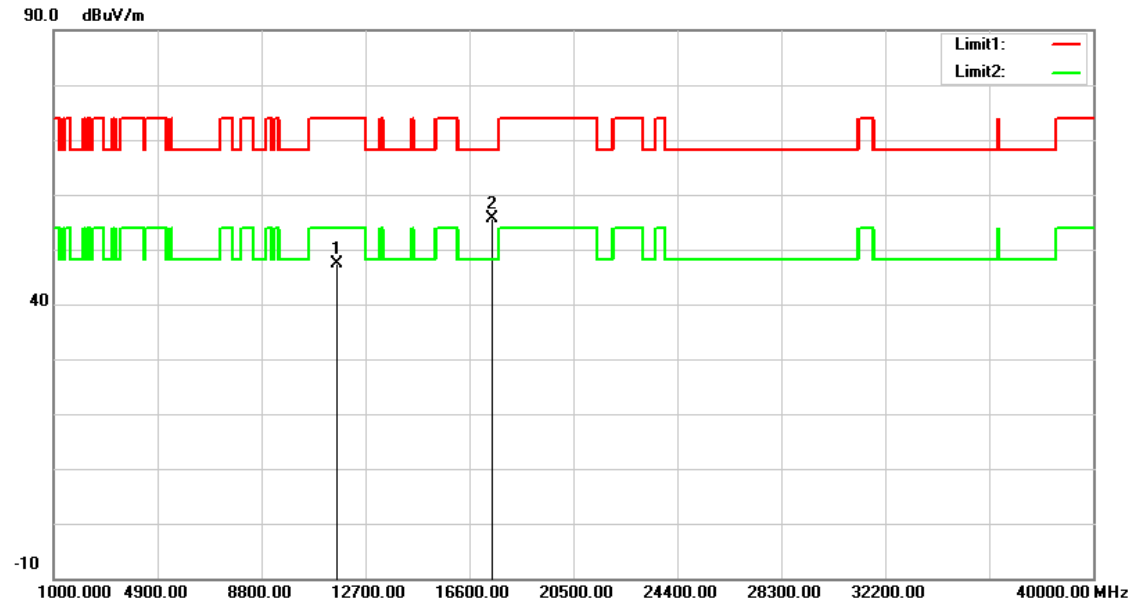


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11650.000	34.79	12.48	47.27	74.00	-26.73	peak
2	17475.000	35.46	20.13	55.59	68.20	-12.61	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5190 MHz		
Mode:	Mode 14		
Ant.Polar.:	Horizontal		

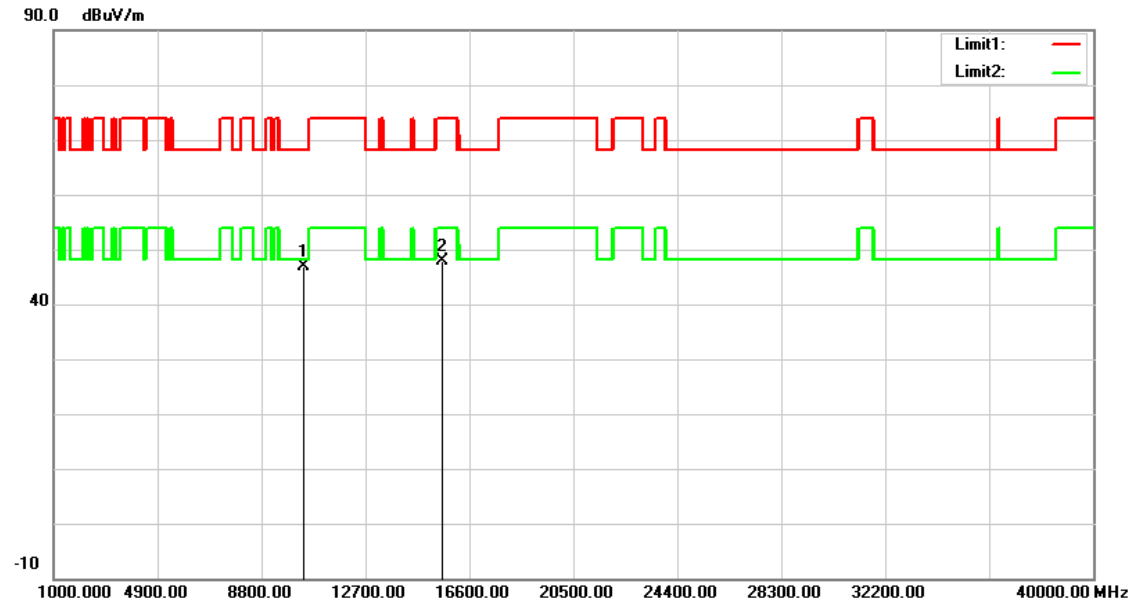


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10380.000	35.14	11.75	46.89	68.20	-21.31	peak
2	15570.000	33.33	14.45	47.78	74.00	-26.22	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5190 MHz		
Mode:	Mode 14		
Ant.Polar.:	Vertical		

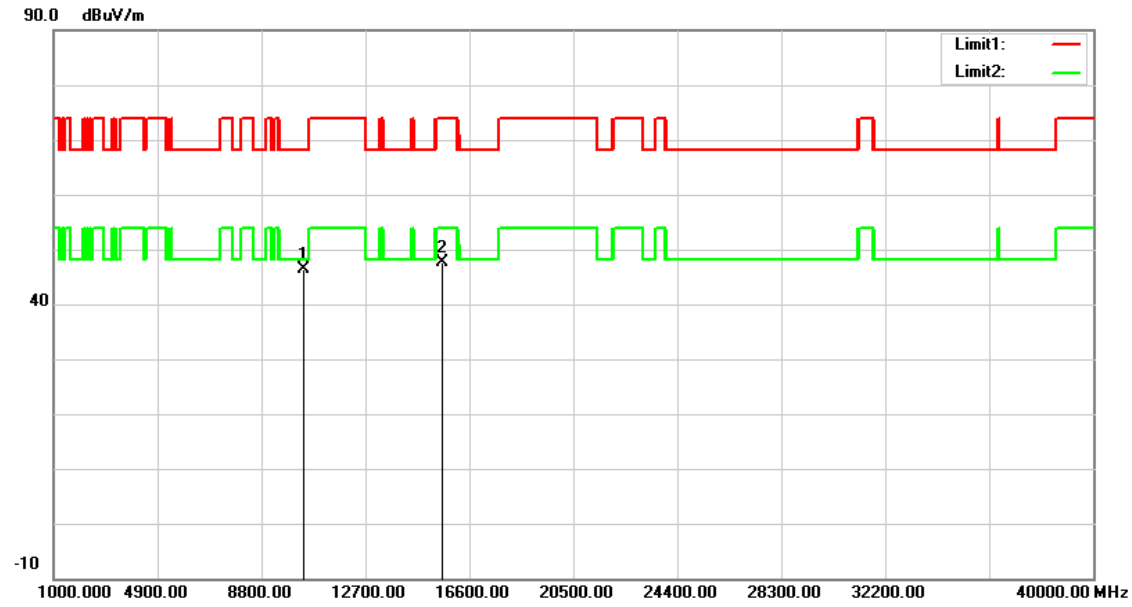


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10380.000	34.66	11.75	46.41	68.20	-21.79	peak
2	15570.000	33.27	14.45	47.72	74.00	-26.28	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5230 MHz		
Mode:	Mode 14		
Ant.Polar.:	Horizontal		

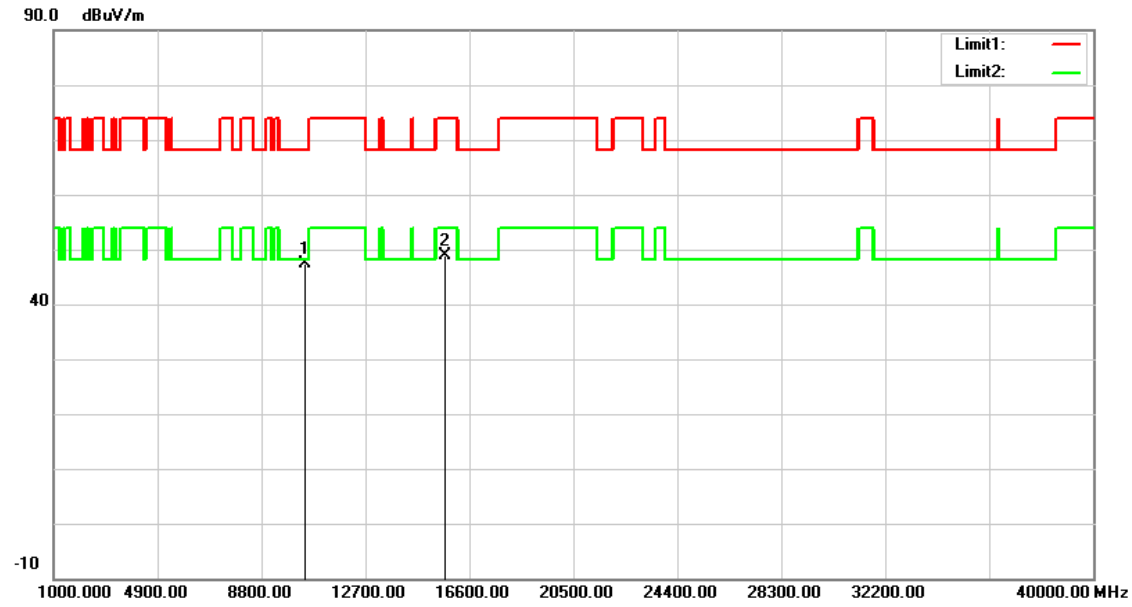


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10460.000	35.53	11.95	47.48	68.20	-20.72	peak
2	15690.000	34.73	14.19	48.92	74.00	-25.08	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5230 MHz		
Mode:	Mode 14		
Ant.Polar.:	Vertical		

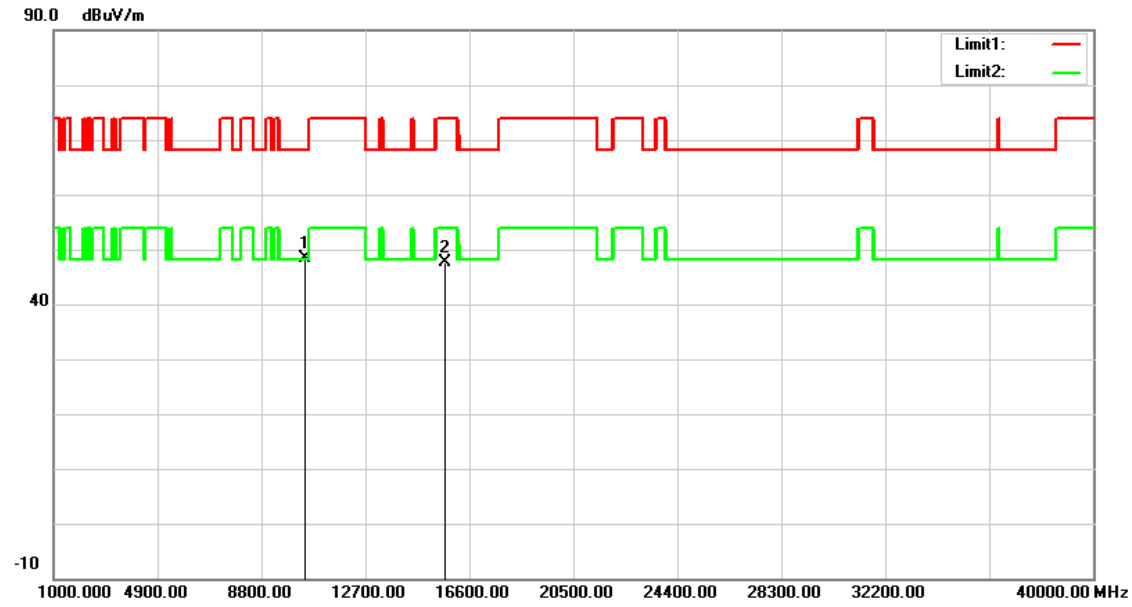


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10460.000	36.46	11.95	48.41	68.20	-19.79	peak
2	15690.000	33.36	14.19	47.55	74.00	-26.45	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5270 MHz		
Mode:	Mode 14		
Ant.Polar.:	Horizontal		

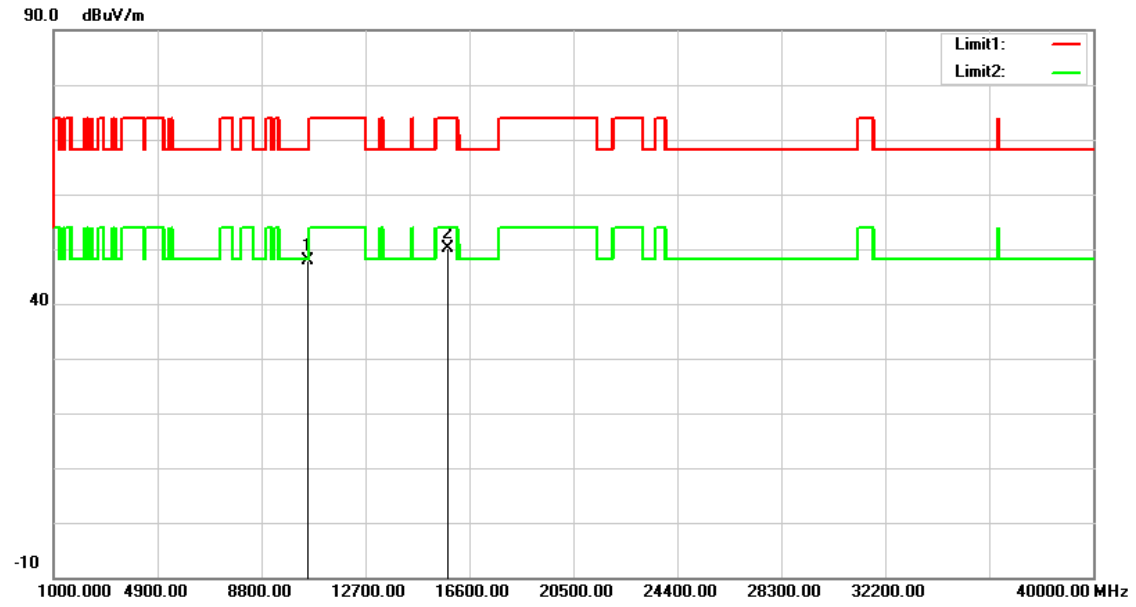


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10540.000	32.01	15.82	47.83	68.20	-20.37	peak
2	15810.000	32.25	17.87	50.12	74.00	-23.88	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5270 MHz		
Mode:	Mode 14		
Ant.Polar.:	Vertical		

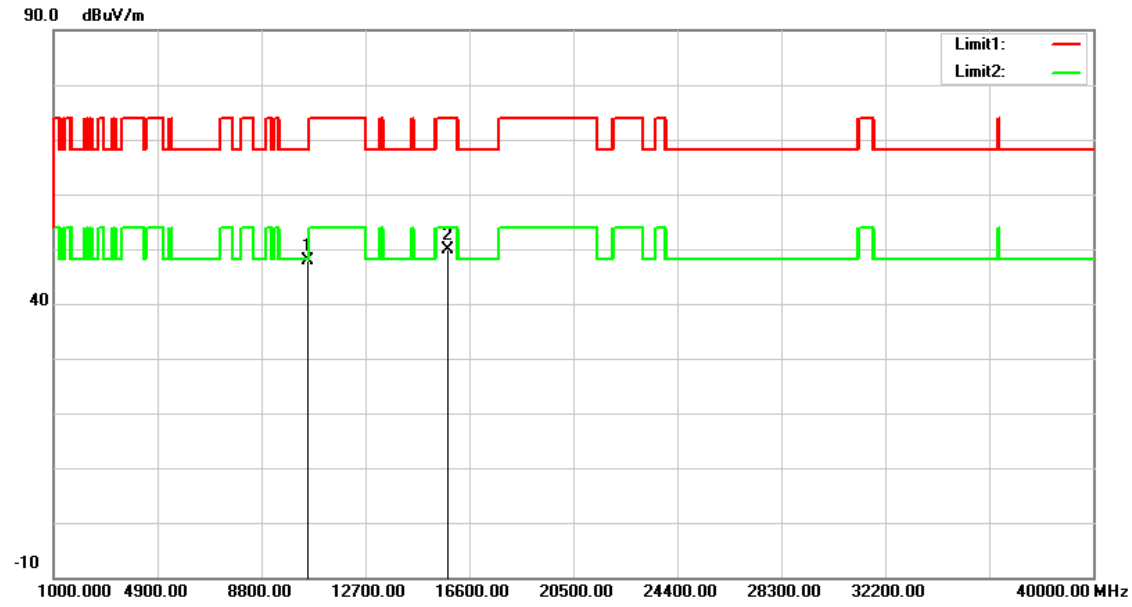


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10540.000	32.01	15.82	47.83	68.20	-20.37	peak
2	15810.000	31.99	17.87	49.86	74.00	-24.14	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5310 MHz		
Mode:	Mode 14		
Ant.Polar.:	Horizontal		

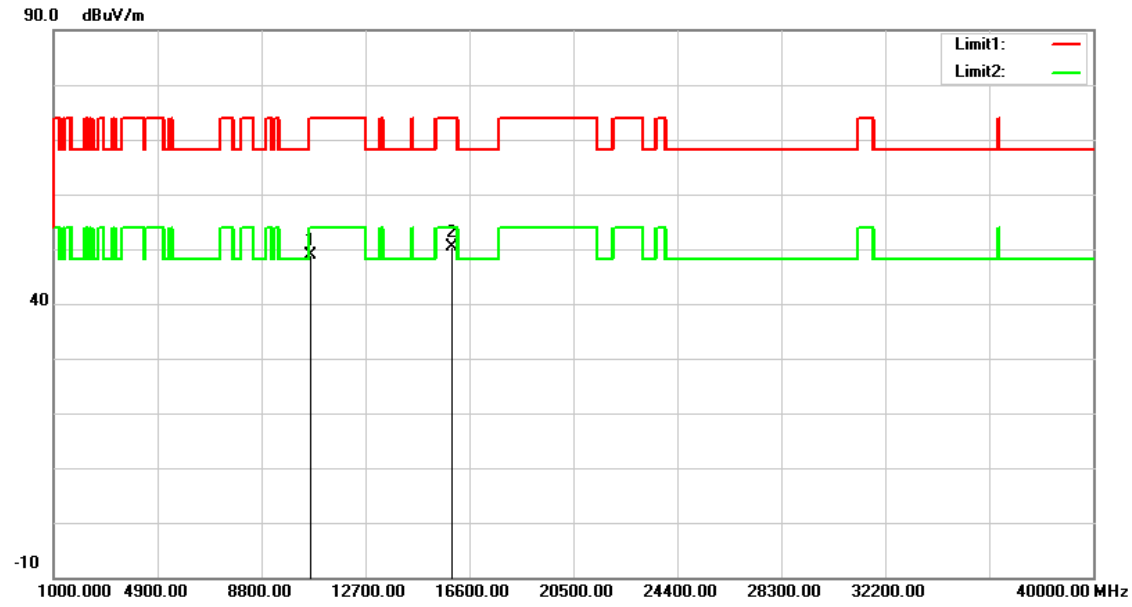


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10620.000	32.83	15.95	48.78	74.00	-25.22	peak
2	15930.000	32.76	17.67	50.43	74.00	-23.57	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5310 MHz		
Mode:	Mode 14		
Ant.Polar.:	Vertical		

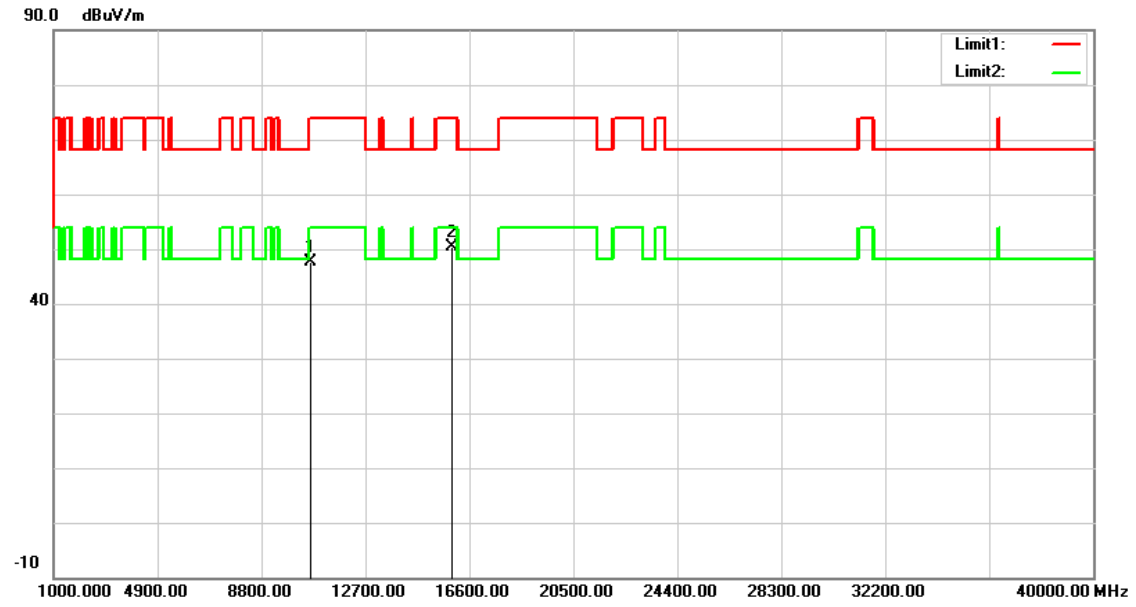


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10620.000	31.78	15.95	47.73	74.00	-26.27	peak
2	15930.000	32.74	17.67	50.41	74.00	-23.59	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5510 MHz		
Mode:	Mode 14		
Ant.Polar.:	Horizontal		

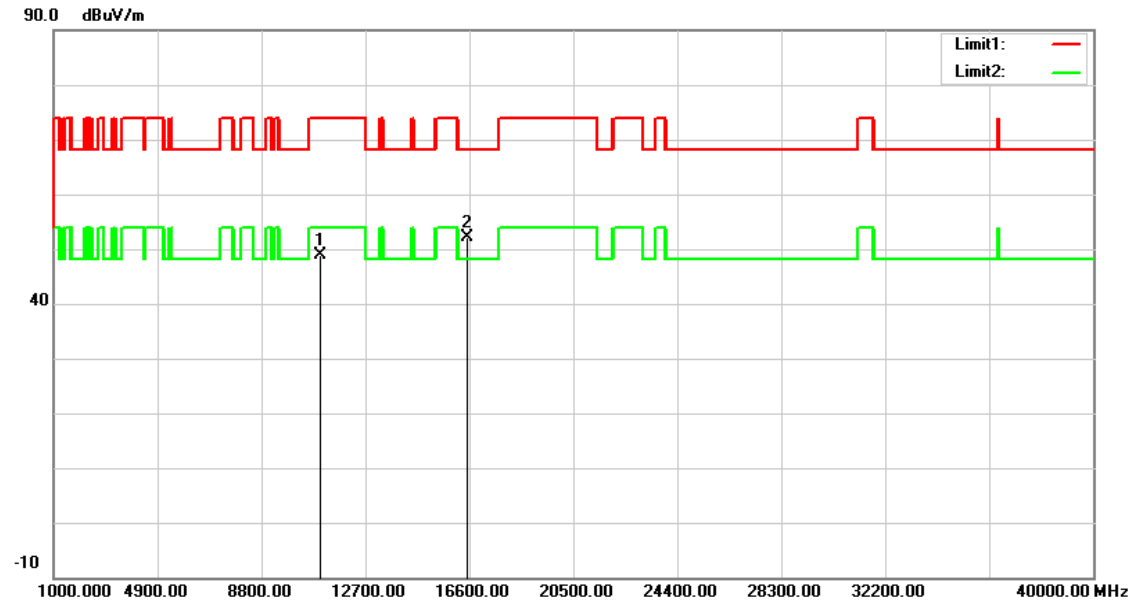


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11020.000	32.21	16.60	48.81	74.00	-25.19	peak
2	16530.000	32.21	20.00	52.21	68.20	-15.99	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5510 MHz		
Mode:	Mode 14		
Ant.Polar.:	Vertical		

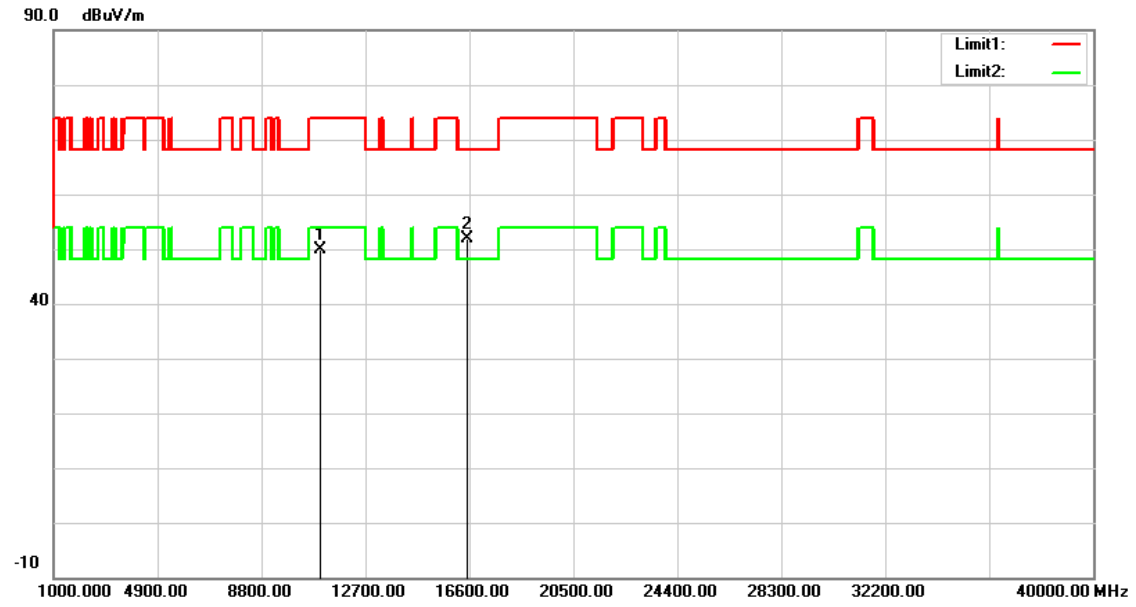


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11020.000	33.20	16.60	49.80	74.00	-24.20	peak
2	16530.000	31.78	20.00	51.78	68.20	-16.42	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5550 MHz		
Mode:	Mode 14		
Ant.Polar.:	Horizontal		

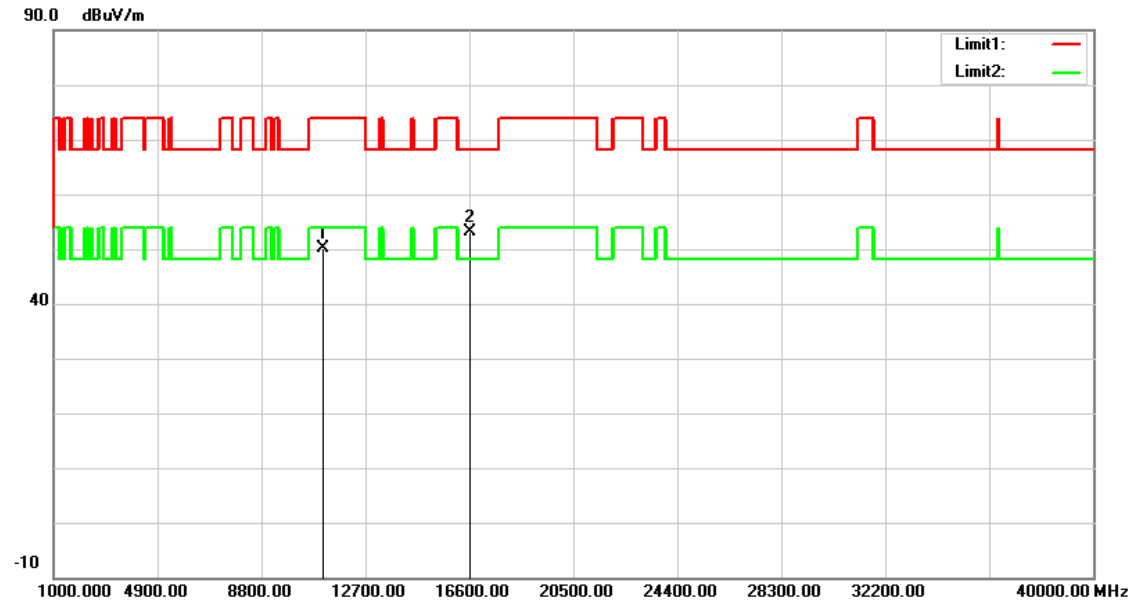


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11100.000	33.52	16.71	50.23	74.00	-23.77	peak
2	16650.000	32.56	20.62	53.18	68.20	-15.02	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5550 MHz		
Mode:	Mode 14		
Ant.Polar.:	Vertical		

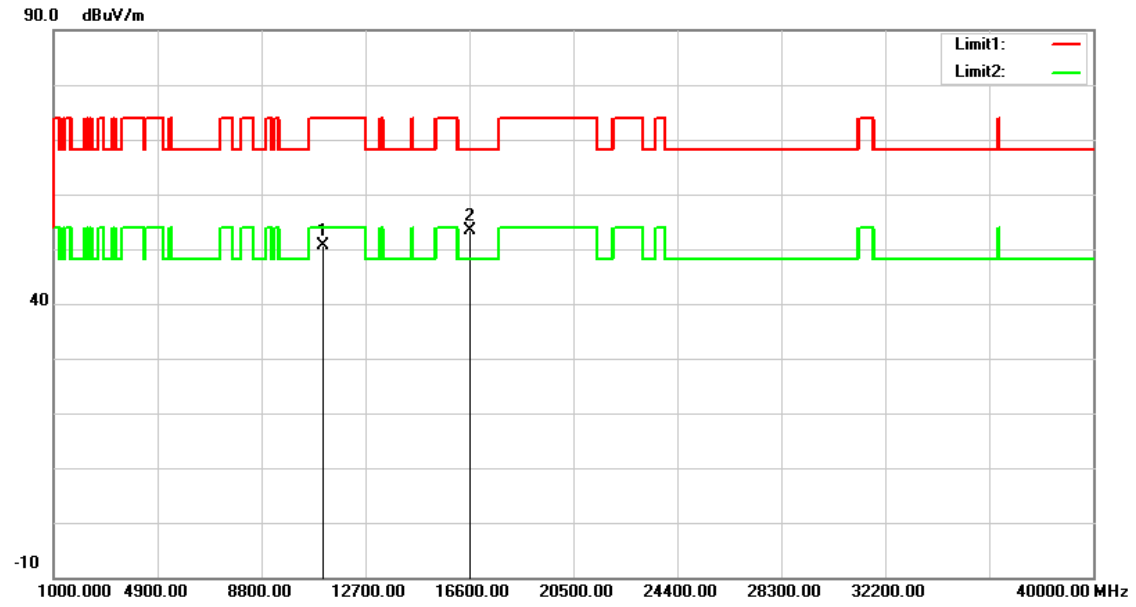


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11100.000	33.84	16.71	50.55	74.00	-23.45	peak
2	16650.000	32.83	20.62	53.45	68.20	-14.75	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5670 MHz		
Mode:	Mode 14		
Ant.Polar.:	Horizontal		

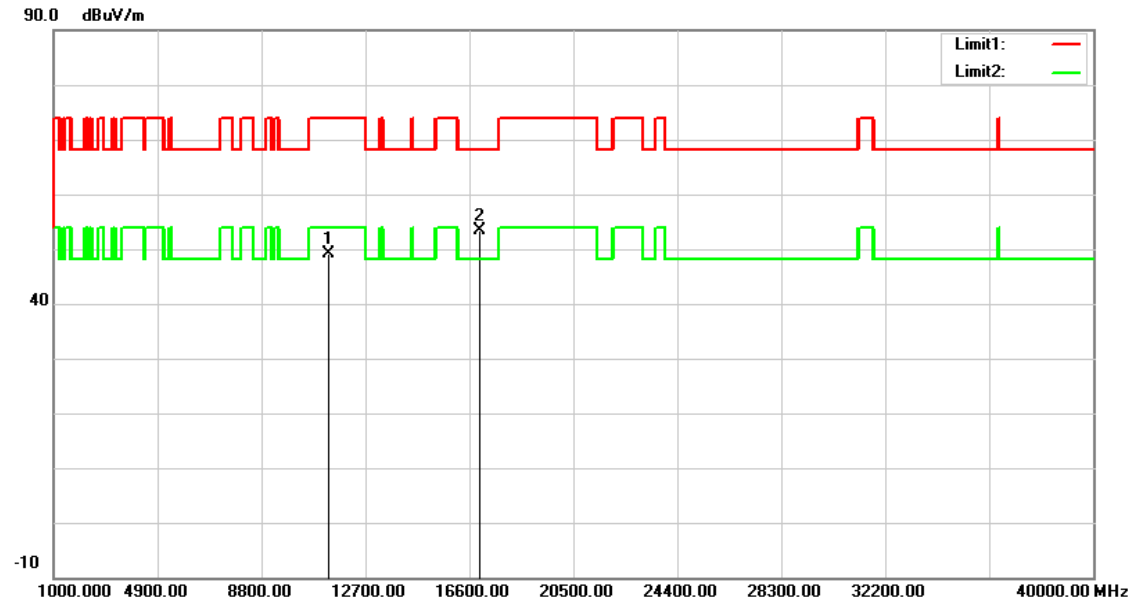


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11340.000	32.13	17.03	49.16	74.00	-24.84	peak
2	17010.000	30.89	22.46	53.35	68.20	-14.85	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5670 MHz		
Mode:	Mode 14		
Ant.Polar.:	Vertical		

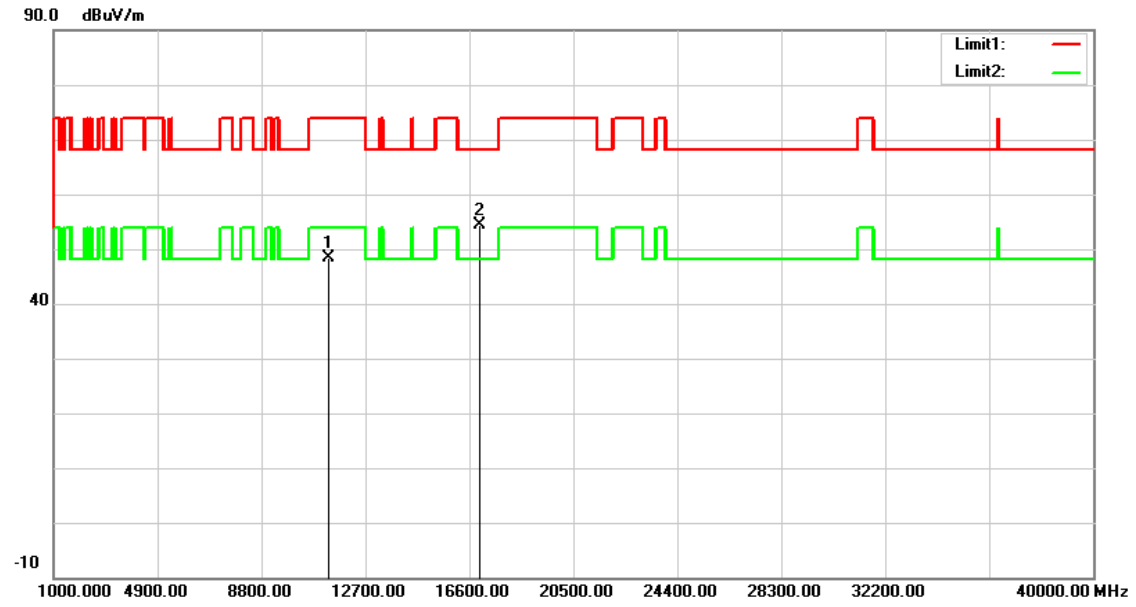


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11340.000	31.29	17.03	48.32	74.00	-25.68	peak
2	17010.000	31.94	22.46	54.40	68.20	-13.80	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5755 MHz		
Mode:	Mode 14		
Ant.Polar.:	Horizontal		

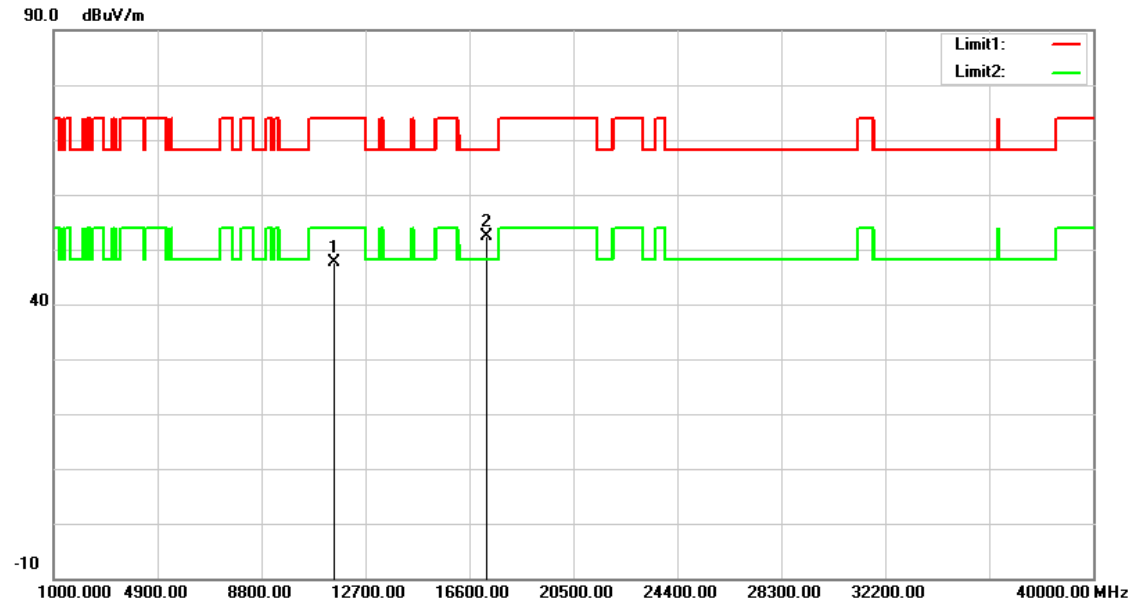


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11510.000	35.06	12.68	47.74	74.00	-26.26	peak
2	17265.000	33.71	18.72	52.43	68.20	-15.77	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5755 MHz		
Mode:	Mode 14		
Ant.Polar.:	Vertical		

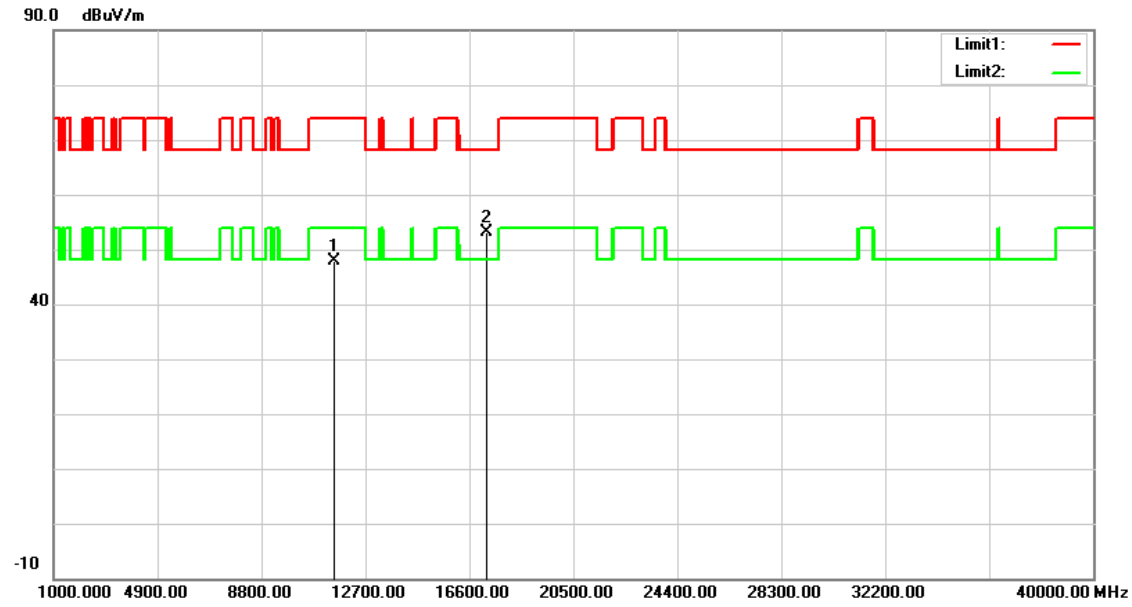


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11510.000	35.18	12.68	47.86	74.00	-26.14	peak
2	17265.000	34.41	18.72	53.13	68.20	-15.07	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5795 MHz		
Mode:	Mode 14		
Ant.Polar.:	Horizontal		

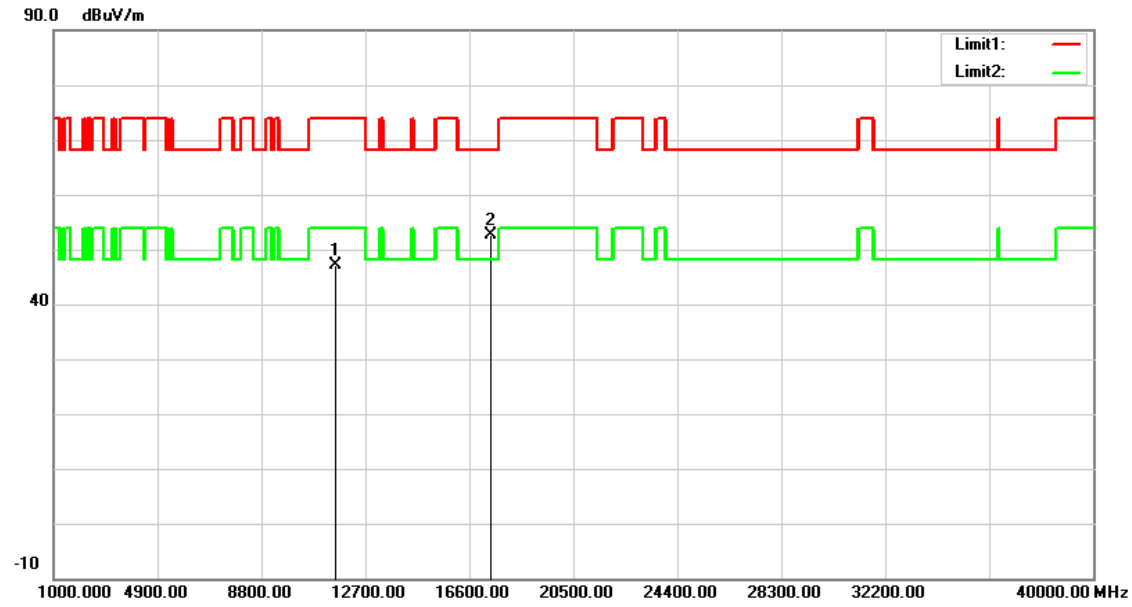


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11590.000	34.56	12.56	47.12	74.00	-26.88	peak
2	17385.000	33.06	19.52	52.58	68.20	-15.62	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5795 MHz		
Mode:	Mode 14		
Ant.Polar.:	Vertical		

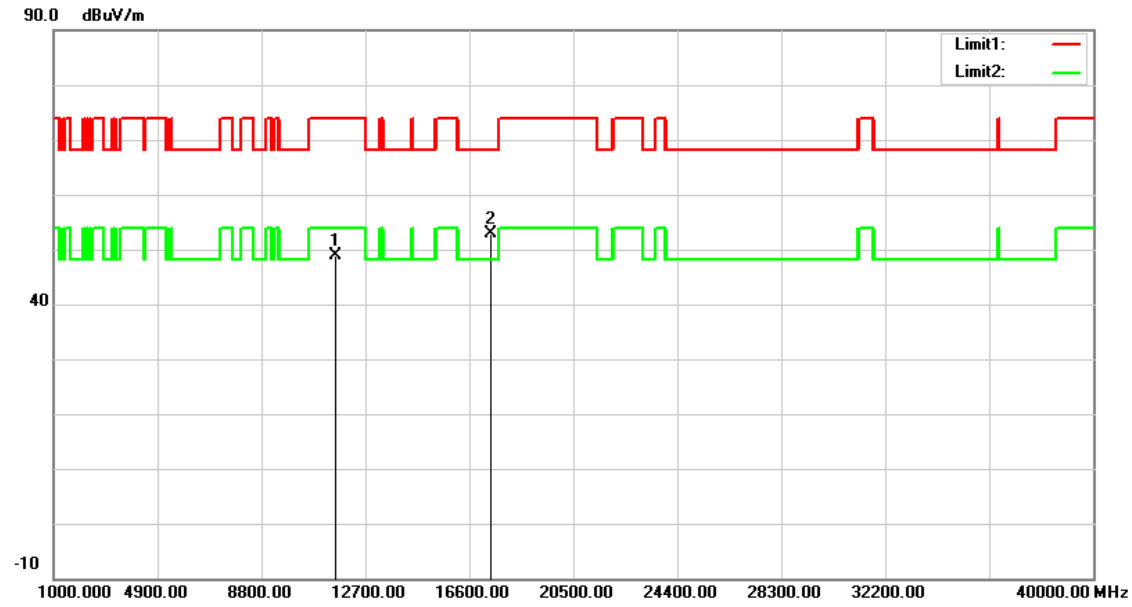


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11590.000	36.41	12.56	48.97	74.00	-25.03	peak
2	17385.000	33.26	19.52	52.78	68.20	-15.42	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5210 MHz		
Mode:	Mode 15		
Ant.Polar.:	Horizontal		

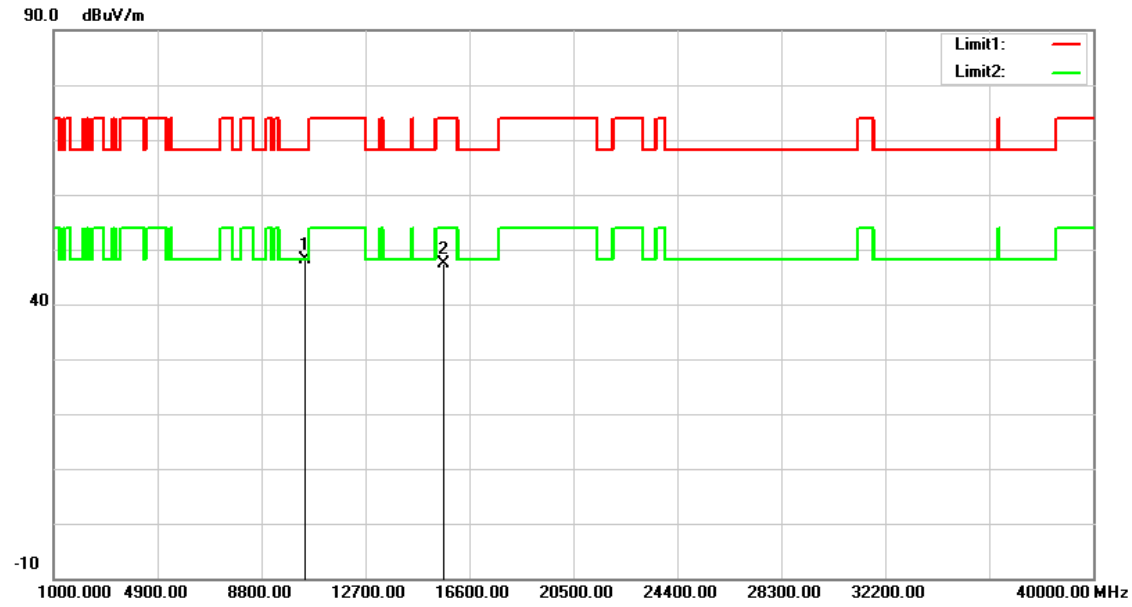


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10420.000	36.24	11.85	48.09	68.20	-20.11	peak
2	15630.000	32.96	14.33	47.29	74.00	-26.71	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5210 MHz		
Mode:	Mode 15		
Ant.Polar.:	Vertical		

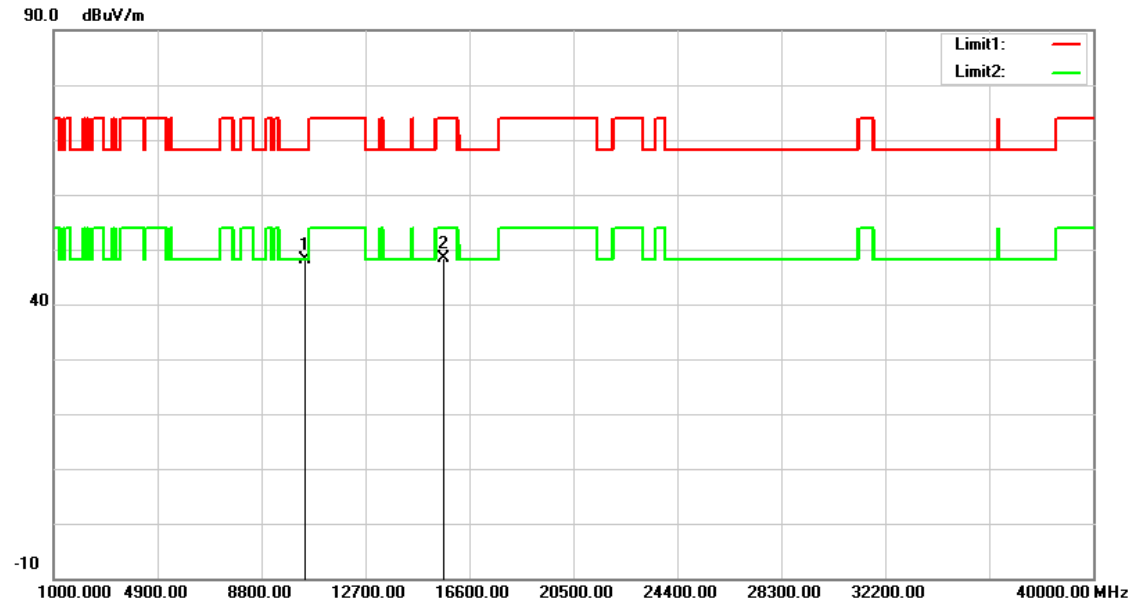


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10420.000	36.28	11.85	48.13	68.20	-20.07	peak
2	15630.000	33.94	14.33	48.27	74.00	-25.73	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5290 MHz		
Mode:	Mode 15		
Ant.Polar.:	Horizontal		

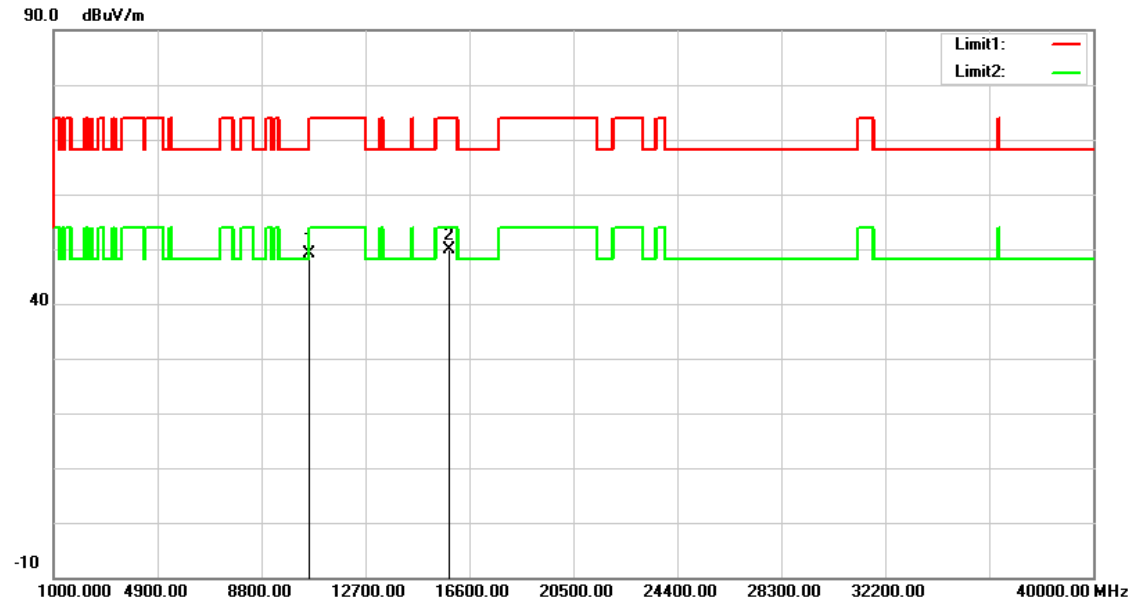


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10580.000	33.35	15.88	49.23	68.20	-18.97	peak
2	15870.000	31.99	17.77	49.76	74.00	-24.24	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5290 MHz		
Mode:	Mode 15		
Ant.Polar.:	Vertical		

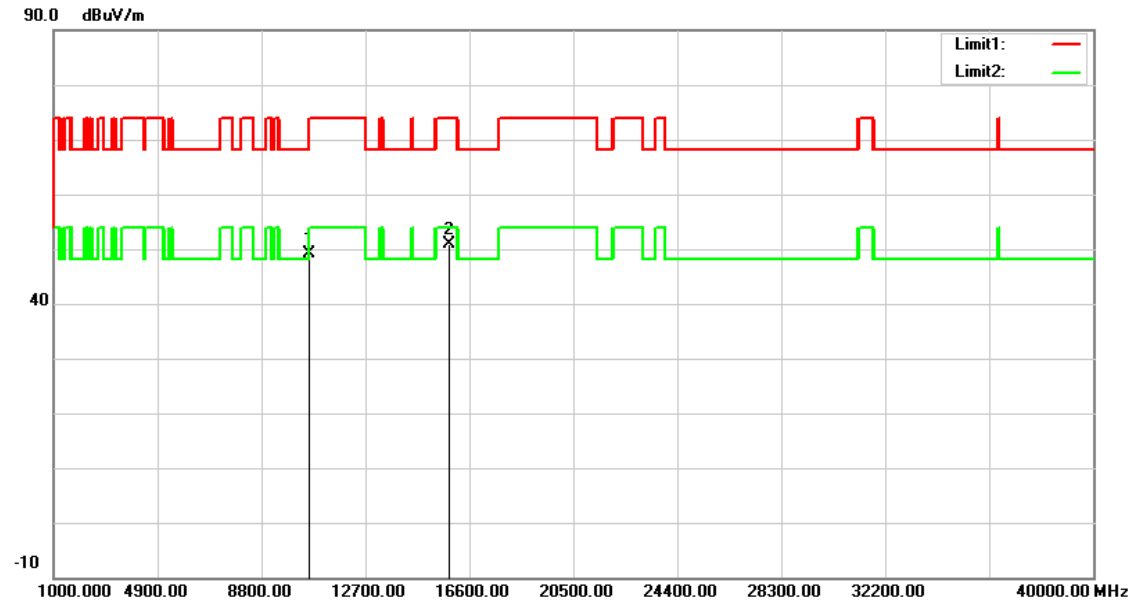


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10580.000	33.15	15.88	49.03	68.20	-19.17	peak
2	15870.000	33.06	17.77	50.83	74.00	-23.17	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5530 MHz		
Mode:	Mode 15		
Ant.Polar.:	Horizontal		

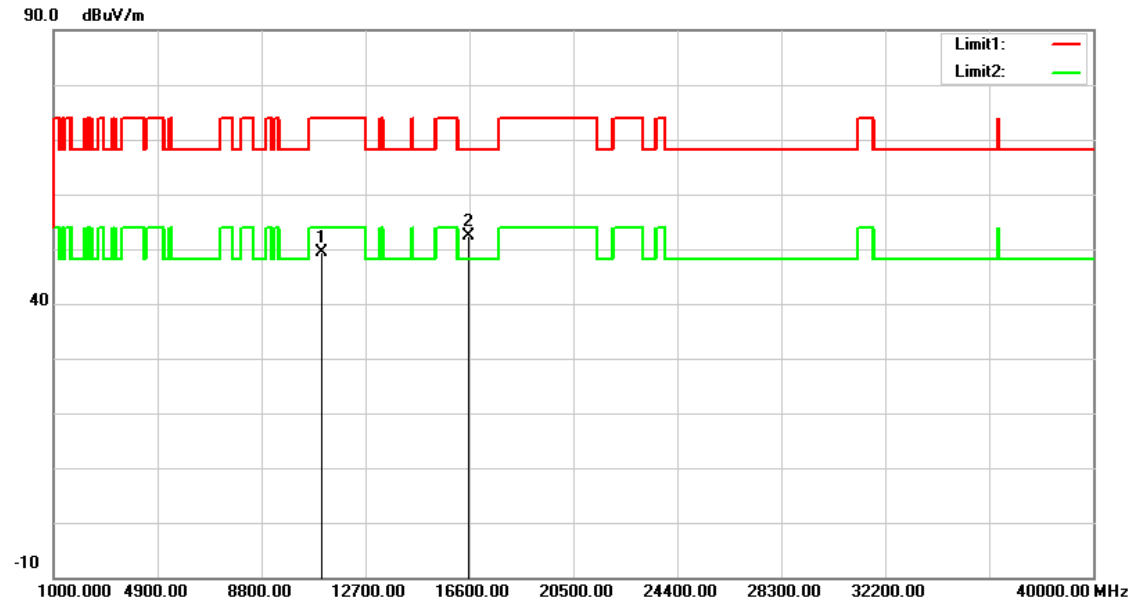


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11060.000	32.69	16.65	49.34	74.00	-24.66	peak
2	16590.000	31.98	20.31	52.29	68.20	-15.91	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5530 MHz		
Mode:	Mode 15		
Ant.Polar.:	Vertical		

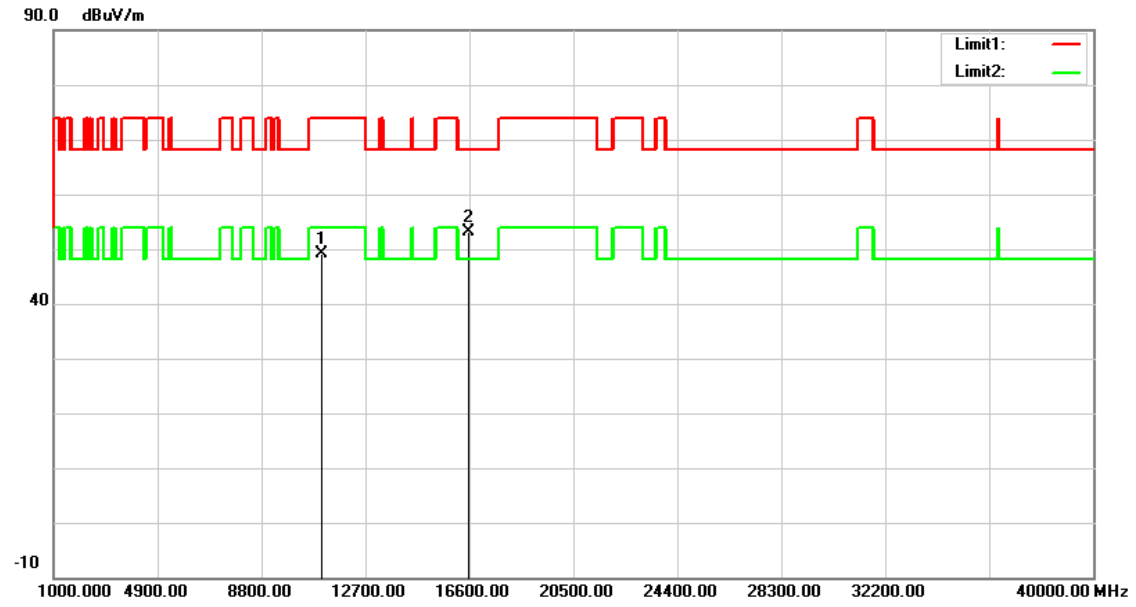


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11060.000	32.48	16.65	49.13	74.00	-24.87	peak
2	16590.000	32.70	20.31	53.01	68.20	-15.19	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5775 MHz		
Mode:	Mode 15		
Ant.Polar.:	Horizontal		

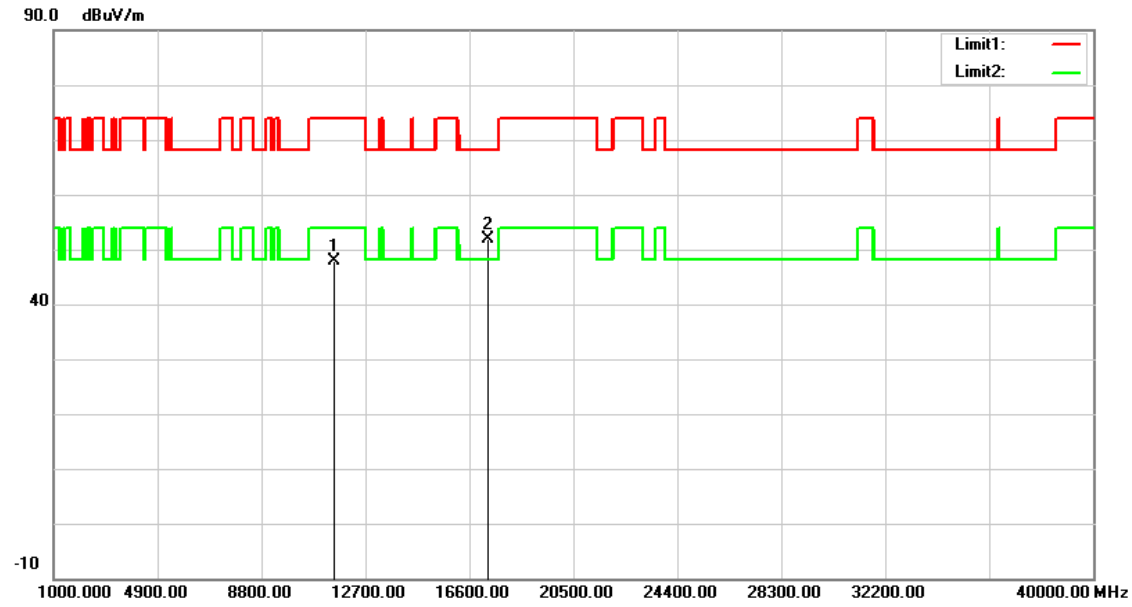


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11550.000	35.37	12.62	47.99	74.00	-26.01	peak
2	17325.000	32.78	19.12	51.90	68.20	-16.30	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5775 MHz		
Mode:	Mode 15		
Ant.Polar.:	Vertical		

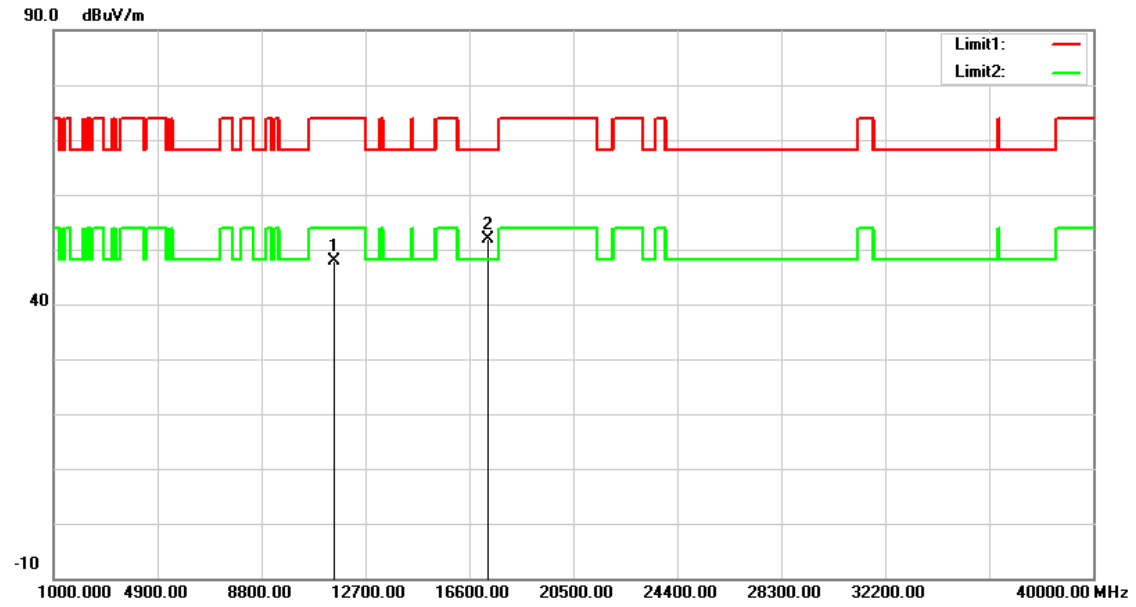


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11550.000	35.30	12.62	47.92	74.00	-26.08	peak
2	17325.000	32.76	19.12	51.88	68.20	-16.32	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5180 MHz		
Mode:	Mode 16		
Ant.Polar.:	Horizontal		

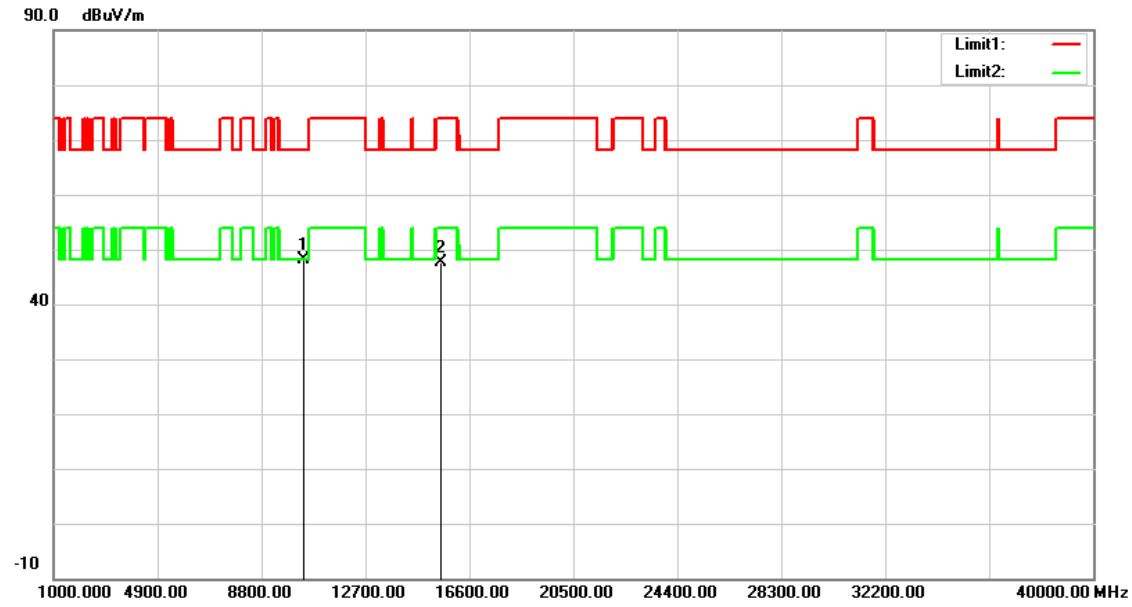


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10360.000	36.48	11.69	48.17	68.20	-20.03	peak
2	15540.000	33.01	14.52	47.53	74.00	-26.47	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5180 MHz		
Mode:	Mode 16		
Ant.Polar.:	Vertical		

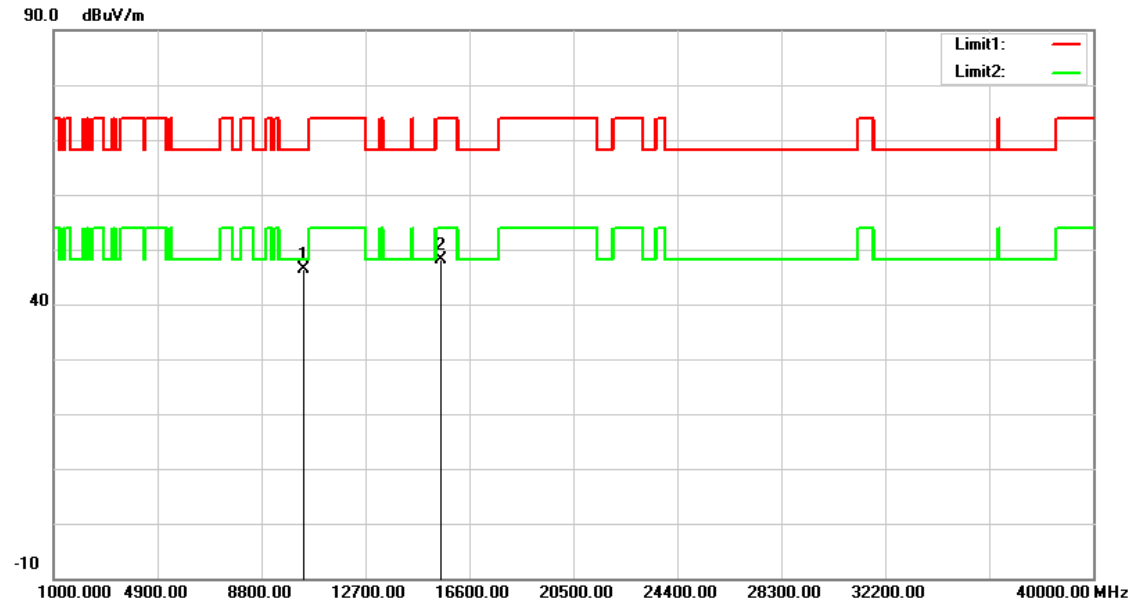


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10360.000	34.61	11.69	46.30	68.20	-21.90	peak
2	15540.000	33.50	14.52	48.02	74.00	-25.98	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5200 MHz		
Mode:	Mode 16		
Ant.Polar.:	Horizontal		

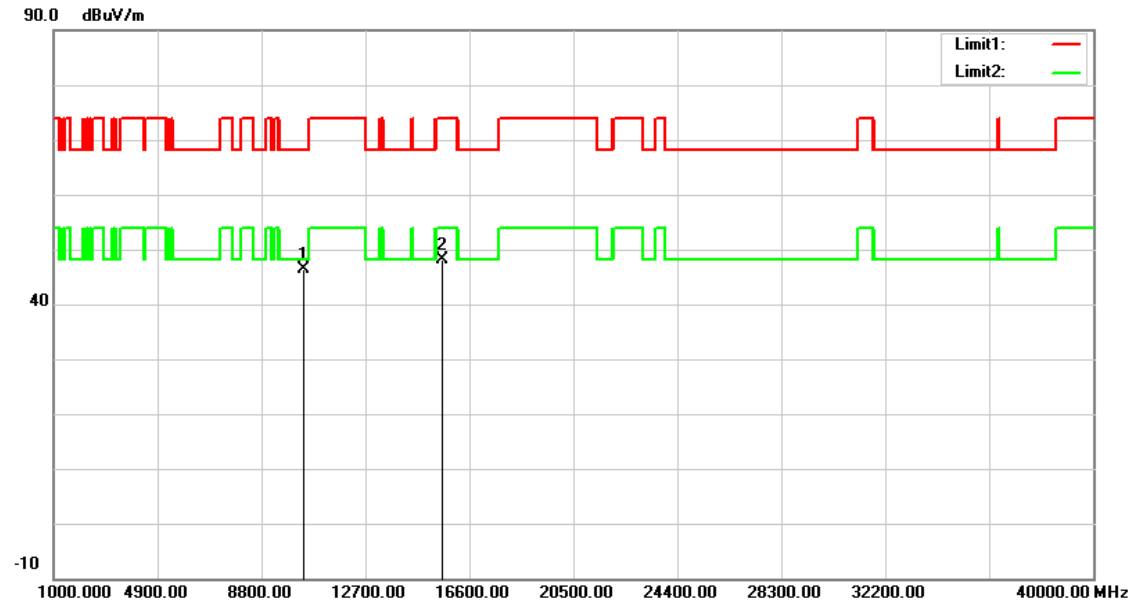


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10400.000	34.58	11.79	46.37	68.20	-21.83	peak
2	15600.000	33.82	14.39	48.21	74.00	-25.79	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5200 MHz		
Mode:	Mode 16		
Ant.Polar.:	Vertical		

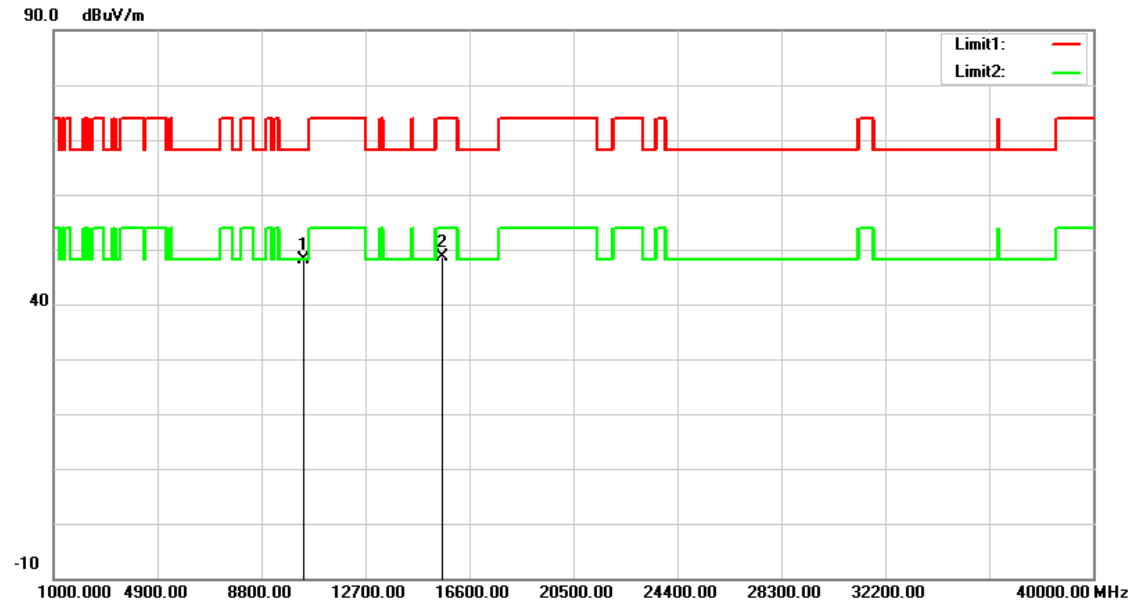


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10400.000	36.34	11.79	48.13	68.20	-20.07	peak
2	15600.000	34.16	14.39	48.55	74.00	-25.45	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5240 MHz		
Mode:	Mode 16		
Ant.Polar.:	Horizontal		

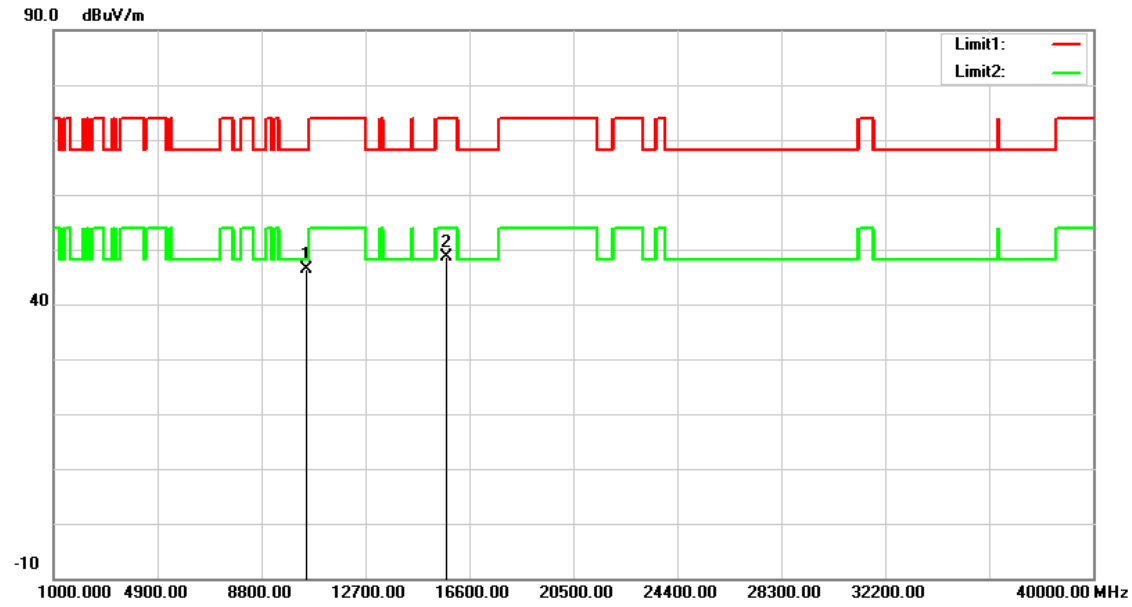


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10480.000	34.29	12.00	46.29	68.20	-21.91	peak
2	15720.000	34.44	14.13	48.57	74.00	-25.43	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5240 MHz		
Mode:	Mode 16		
Ant.Polar.:	Vertical		

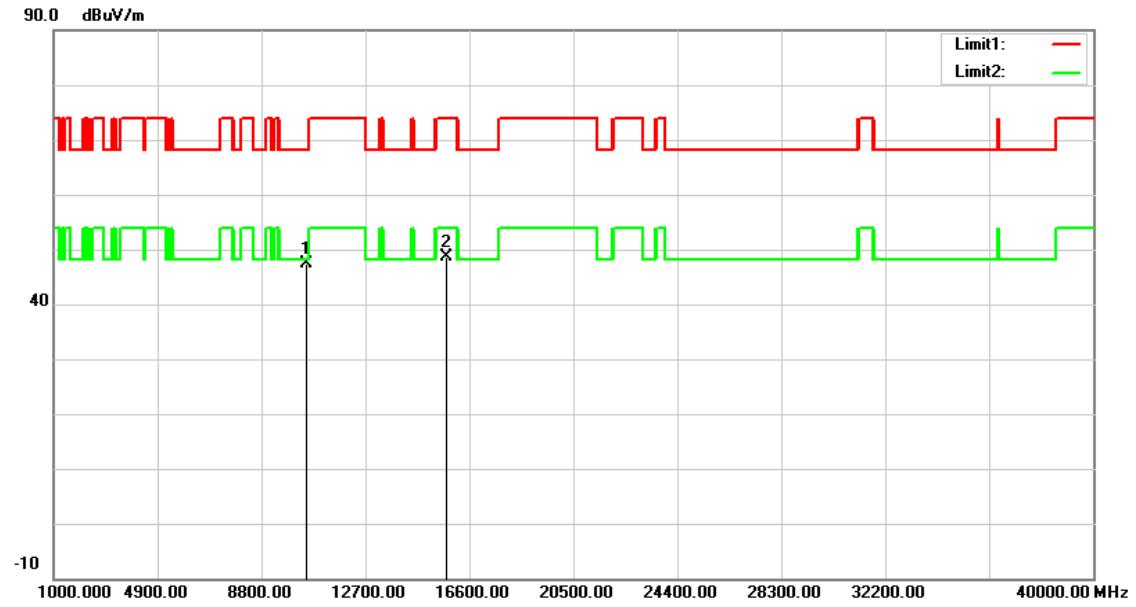


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10480.000	35.36	12.00	47.36	68.20	-20.84	peak
2	15720.000	34.52	14.13	48.65	74.00	-25.35	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5260 MHz		
Mode:	Mode 16		
Ant.Polar.:	Horizontal		

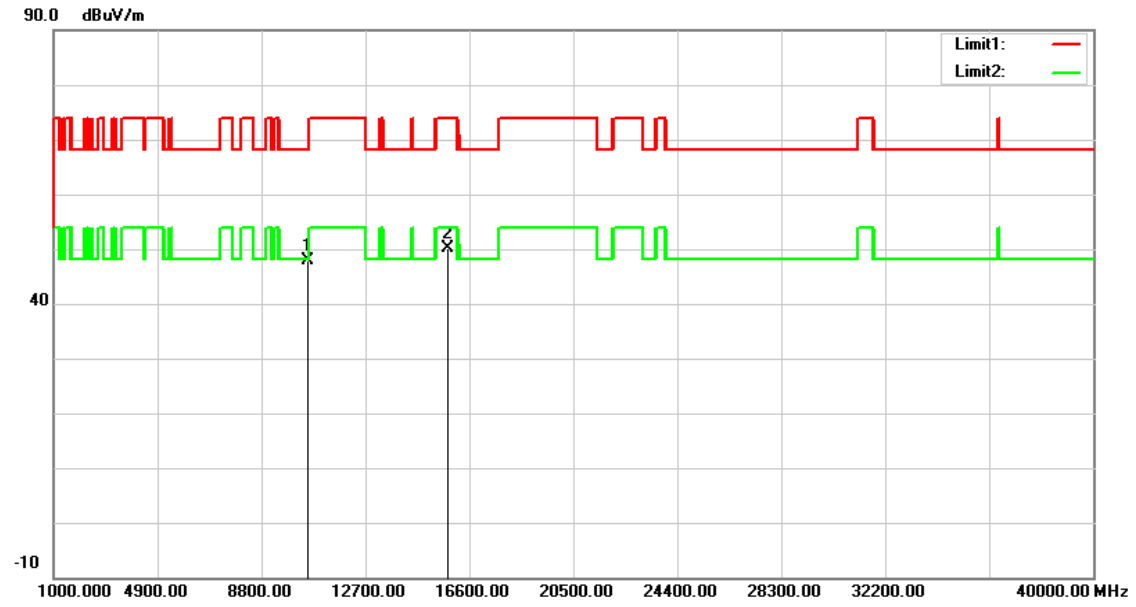


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10520.000	32.15	15.79	47.94	68.20	-20.26	peak
2	15780.000	32.25	17.92	50.17	74.00	-23.83	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5260 MHz		
Mode:	Mode 16		
Ant.Polar.:	Vertical		

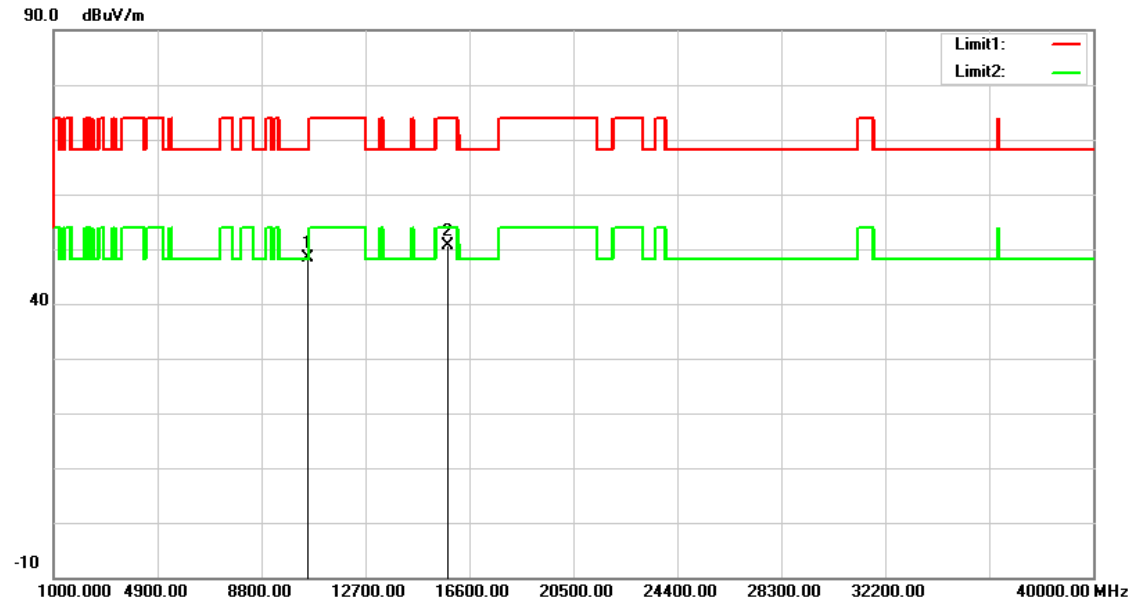


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10520.000	32.63	15.79	48.42	68.20	-19.78	peak
2	15780.000	32.82	17.92	50.74	74.00	-23.26	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5280 MHz		
Mode:	Mode 16		
Ant.Polar.:	Horizontal		

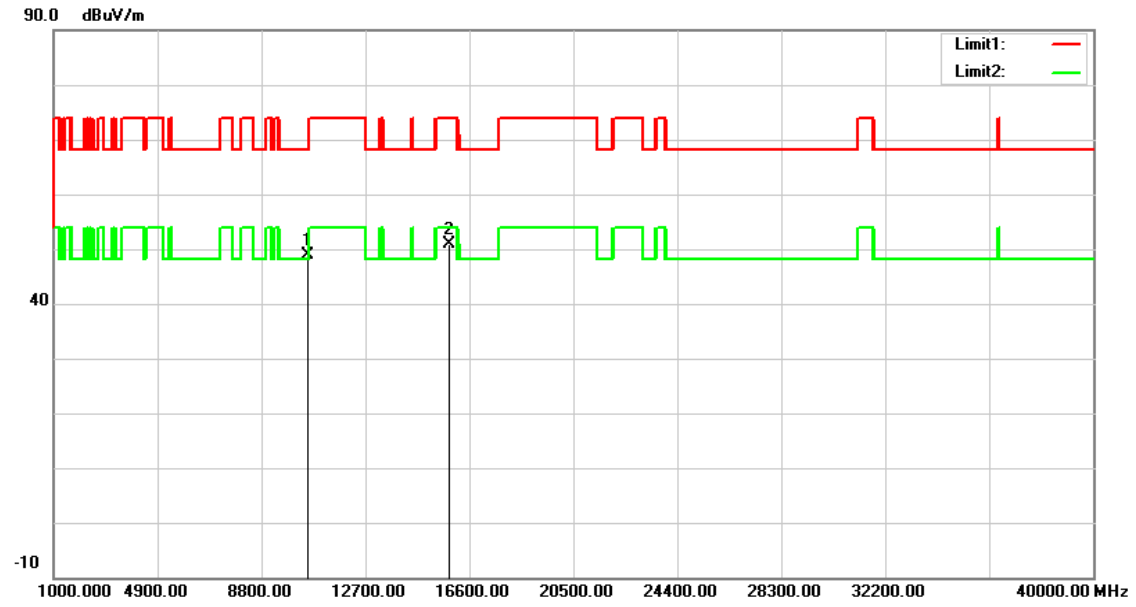


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10560.000	33.12	15.85	48.97	68.20	-19.23	peak
2	15840.000	33.03	17.82	50.85	74.00	-23.15	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5280 MHz		
Mode:	Mode 16		
Ant.Polar.:	Vertical		

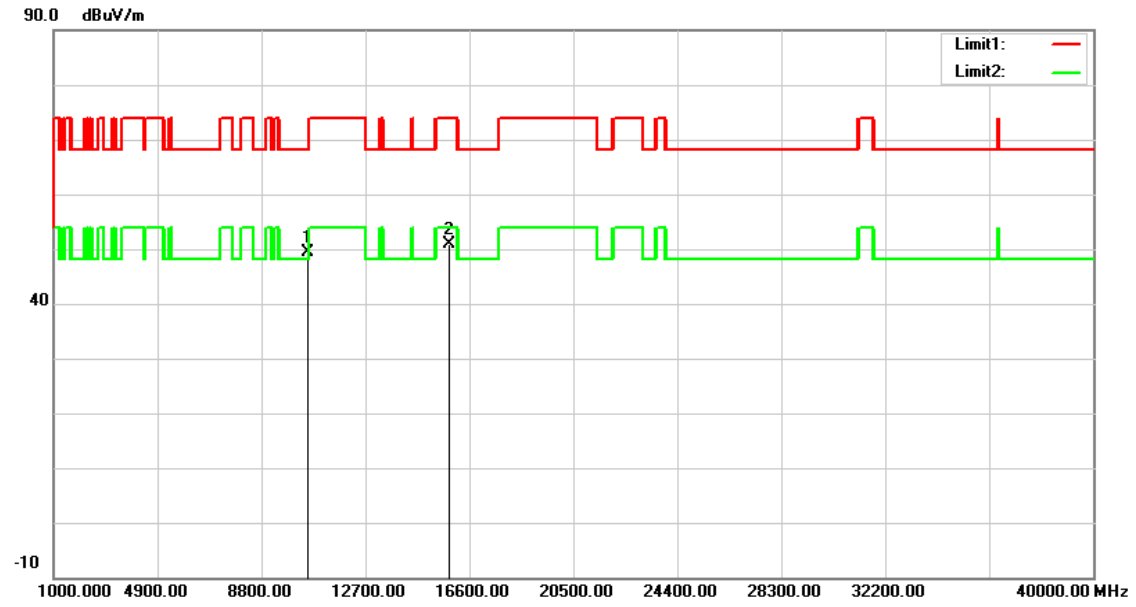


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10560.000	33.44	15.85	49.29	68.20	-18.91	peak
2	15840.000	33.07	17.82	50.89	74.00	-23.11	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5320 MHz		
Mode:	Mode 16		
Ant.Polar.:	Horizontal		

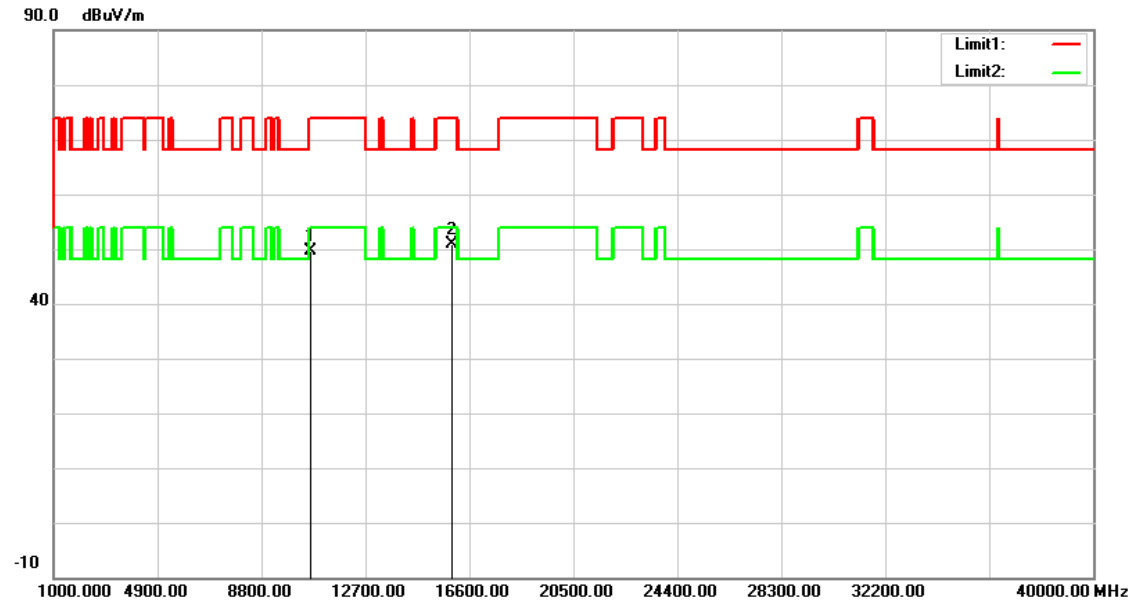


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10640.000	33.68	15.98	49.66	74.00	-24.34	peak
2	15960.000	33.36	17.62	50.98	74.00	-23.02	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5320 MHz		
Mode:	Mode 16		
Ant.Polar.:	Vertical		

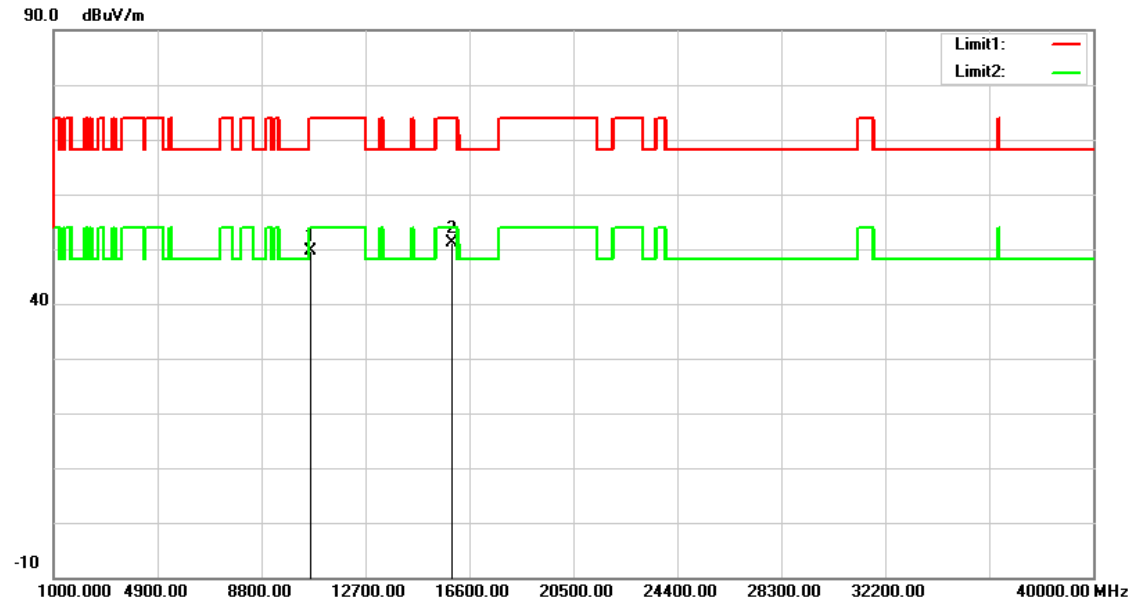


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10640.000	33.76	15.98	49.74	74.00	-24.26	peak
2	15960.000	33.51	17.62	51.13	74.00	-22.87	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5500 MHz		
Mode:	Mode 16		
Ant.Polar.:	Horizontal		

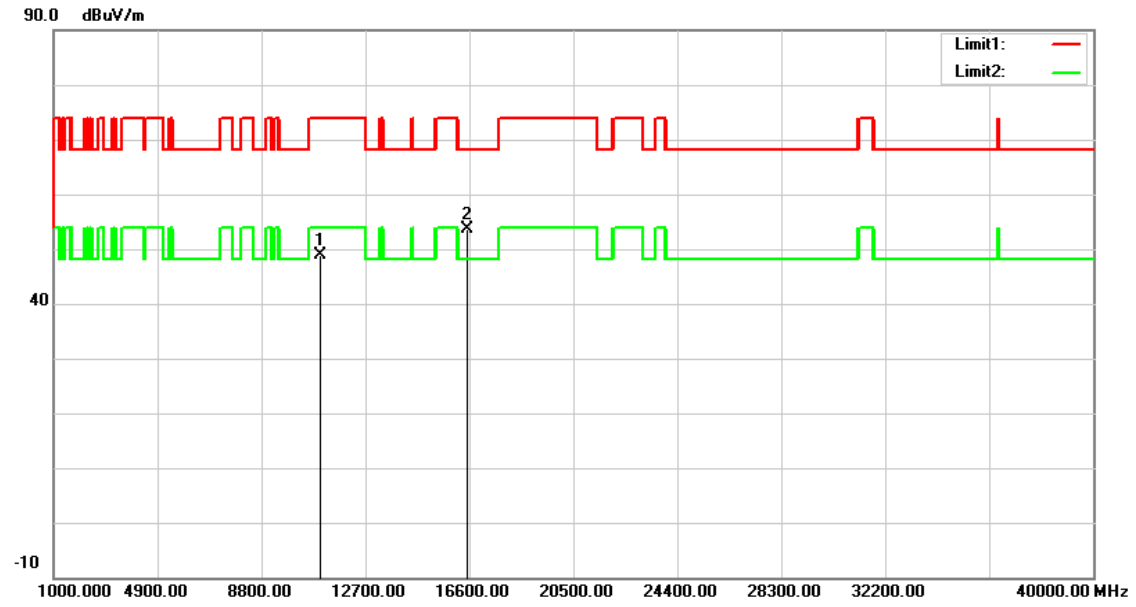


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11000.000	32.41	16.57	48.98	74.00	-25.02	peak
2	16500.000	33.70	19.85	53.55	68.20	-14.65	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5500 MHz		
Mode:	Mode 16		
Ant.Polar.:	Vertical		

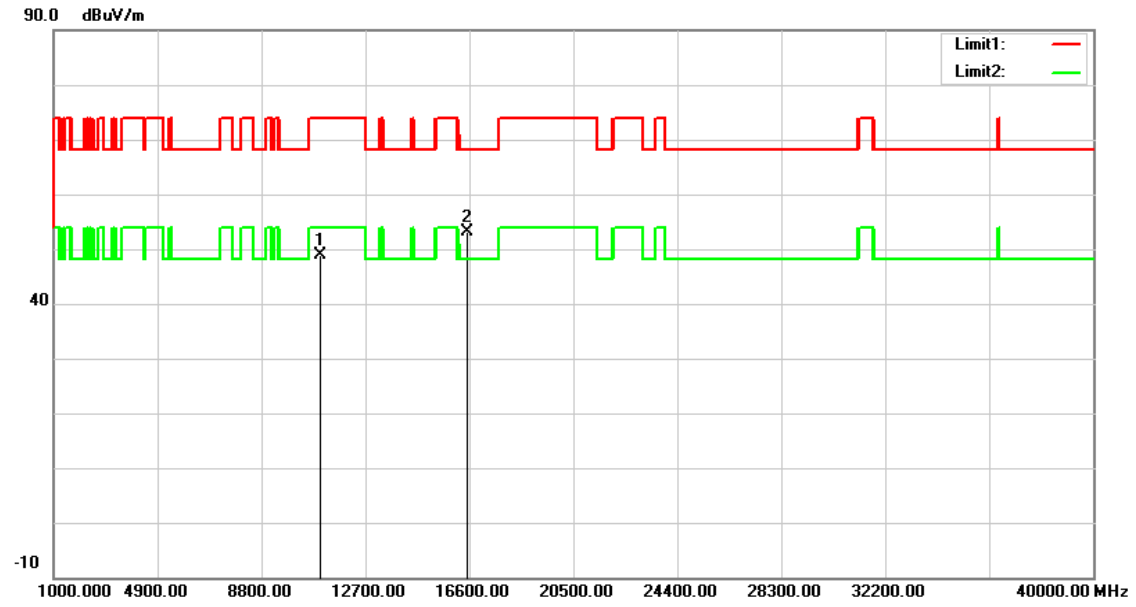


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11000.000	32.40	16.57	48.97	74.00	-25.03	peak
2	16500.000	33.40	19.85	53.25	68.20	-14.95	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5560 MHz		
Mode:	Mode 16		
Ant.Polar.:	Horizontal		

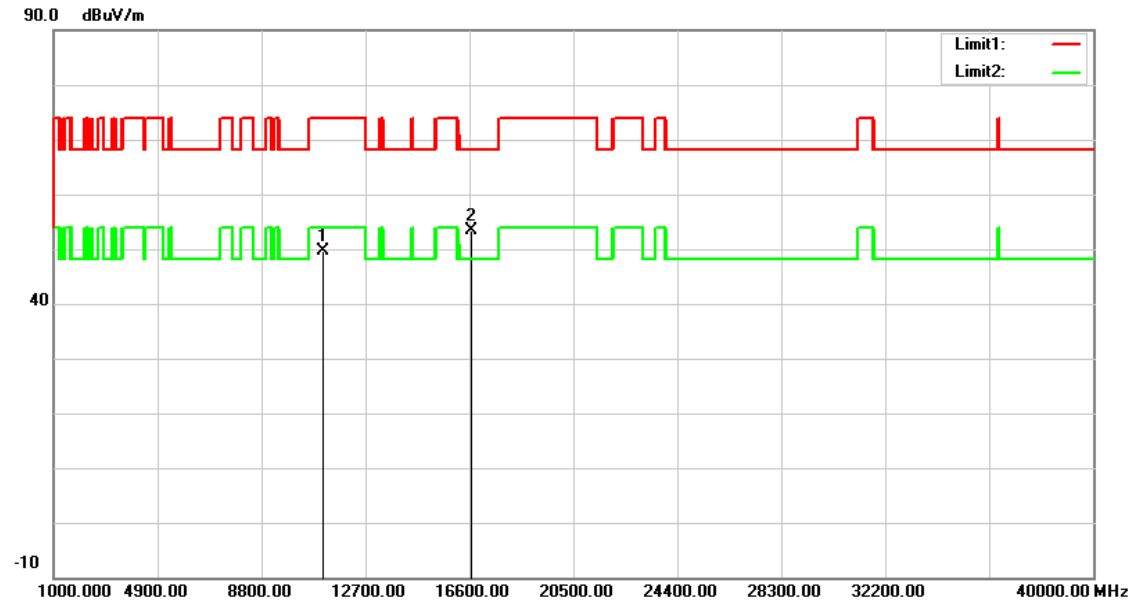


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11120.000	32.86	16.73	49.59	74.00	-24.41	peak
2	16680.000	32.71	20.77	53.48	68.20	-14.72	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5560 MHz		
Mode:	Mode 16		
Ant.Polar.:	Vertical		

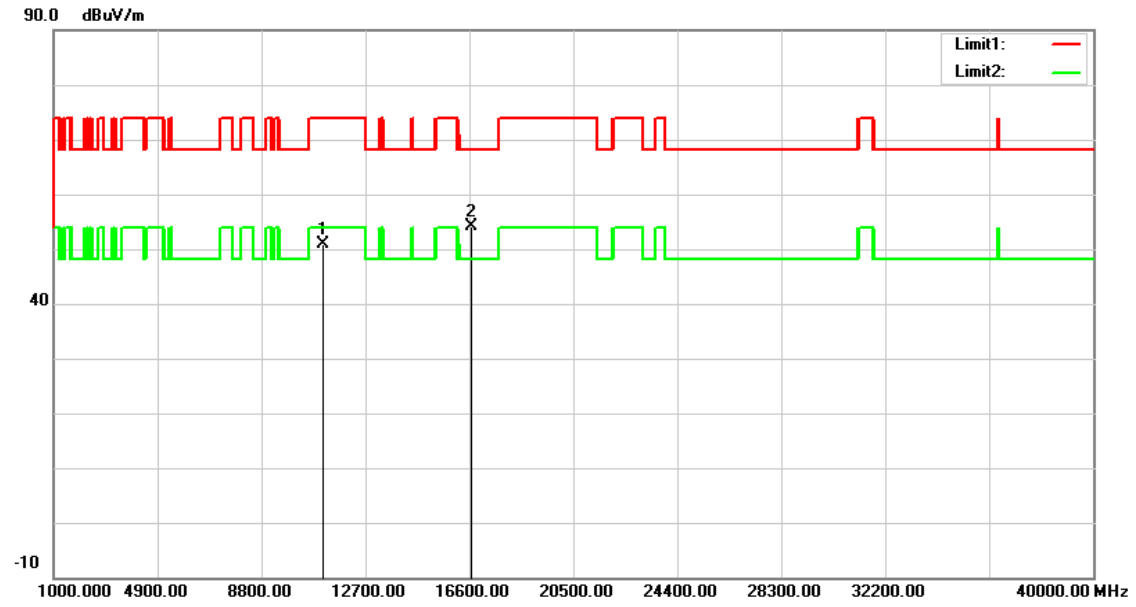


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11120.000	34.09	16.73	50.82	74.00	-23.18	peak
2	16680.000	33.42	20.77	54.19	68.20	-14.01	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5700 MHz		
Mode:	Mode 16		
Ant.Polar.:	Horizontal		

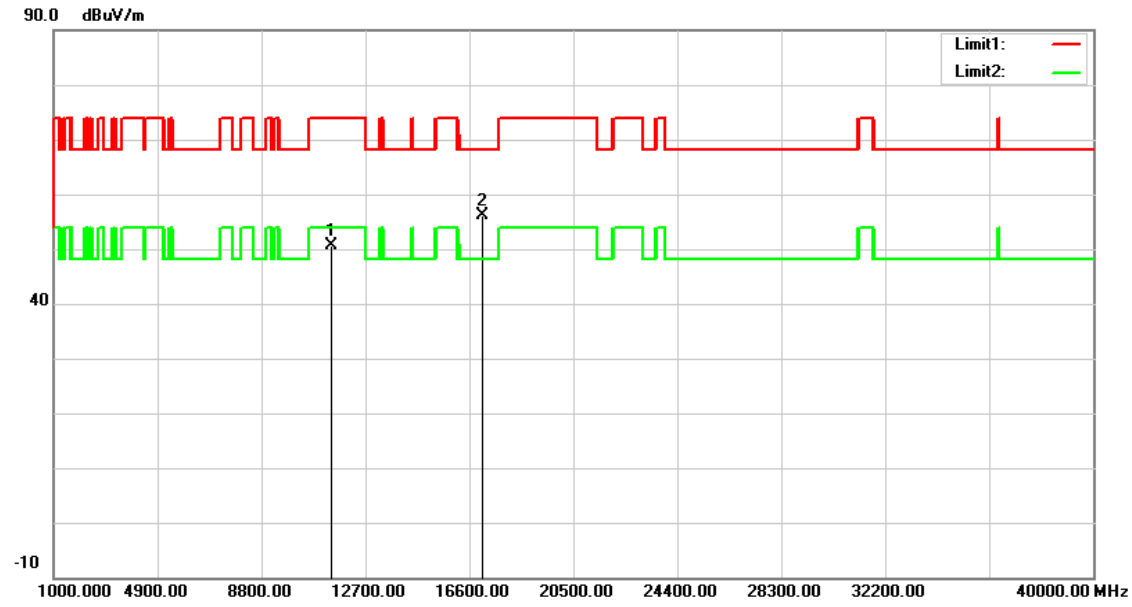


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11400.000	33.48	17.10	50.58	74.00	-23.42	peak
2	17100.000	33.46	22.78	56.24	68.20	-11.96	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5700 MHz		
Mode:	Mode 16		
Ant.Polar.:	Vertical		

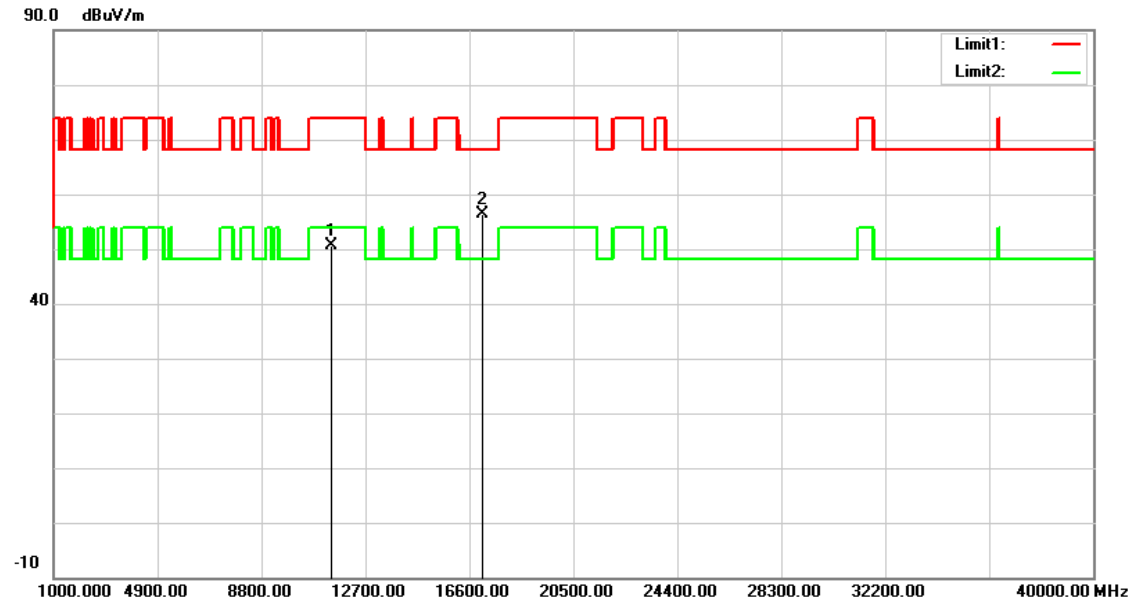


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11400.000	33.57	17.10	50.67	74.00	-23.33	peak
2	17100.000	33.58	22.78	56.36	68.20	-11.84	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5745 MHz		
Mode:	Mode 16		
Ant.Polar.:	Horizontal		

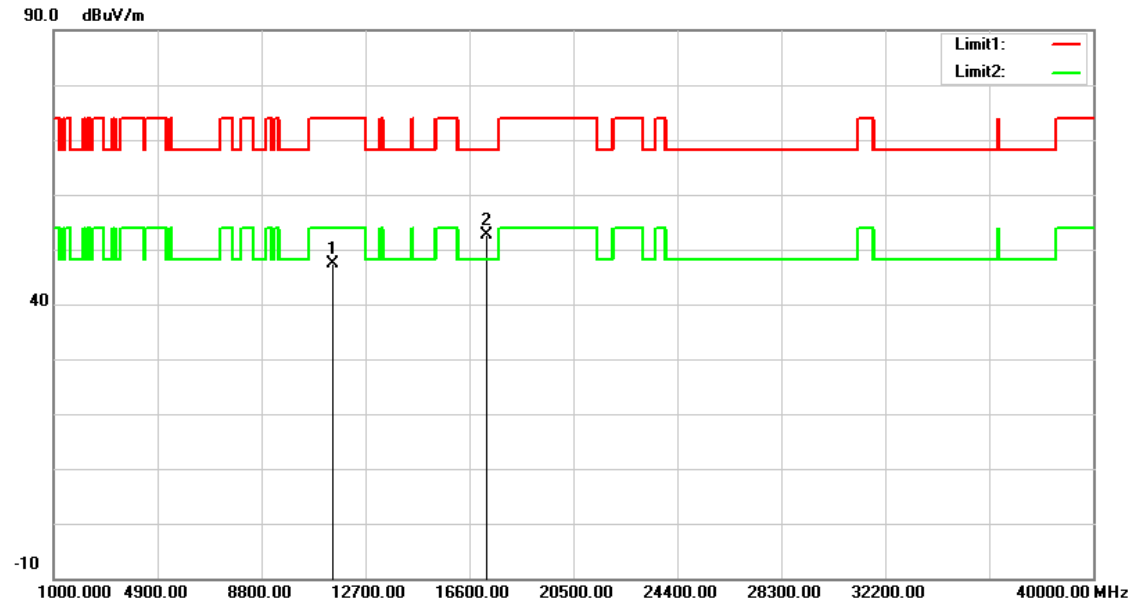


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11490.000	34.64	12.68	47.32	74.00	-26.68	peak
2	17235.000	34.05	18.52	52.57	68.20	-15.63	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5745 MHz		
Mode:	Mode 16		
Ant.Polar.:	Vertical		

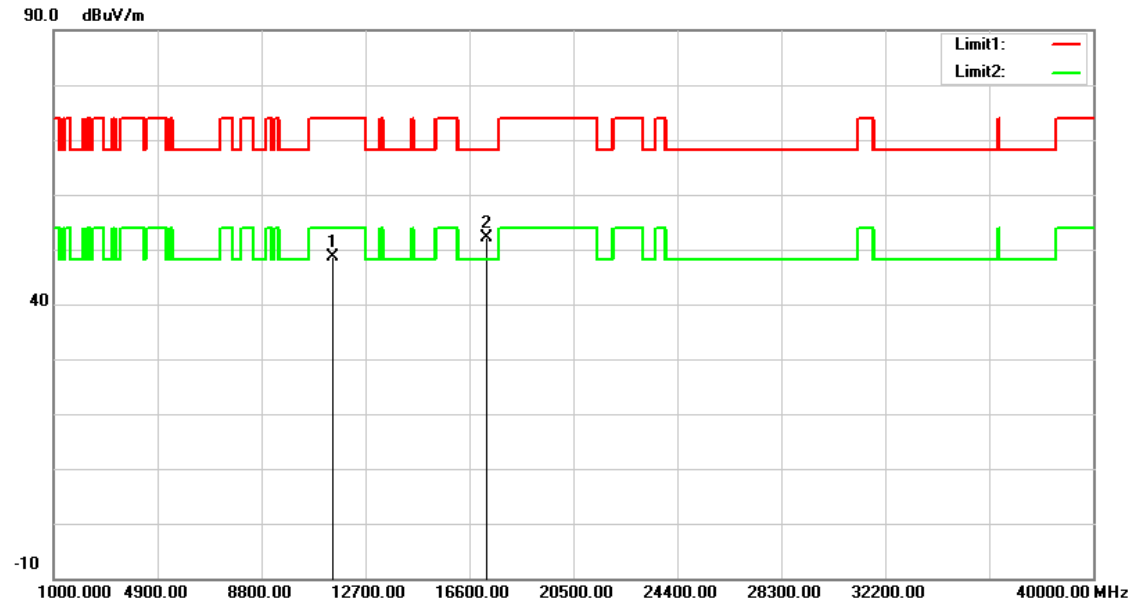


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11490.000	35.90	12.68	48.58	74.00	-25.42	peak
2	17235.000	33.67	18.52	52.19	68.20	-16.01	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5785 MHz		
Mode:	Mode 16		
Ant.Polar.:	Horizontal		

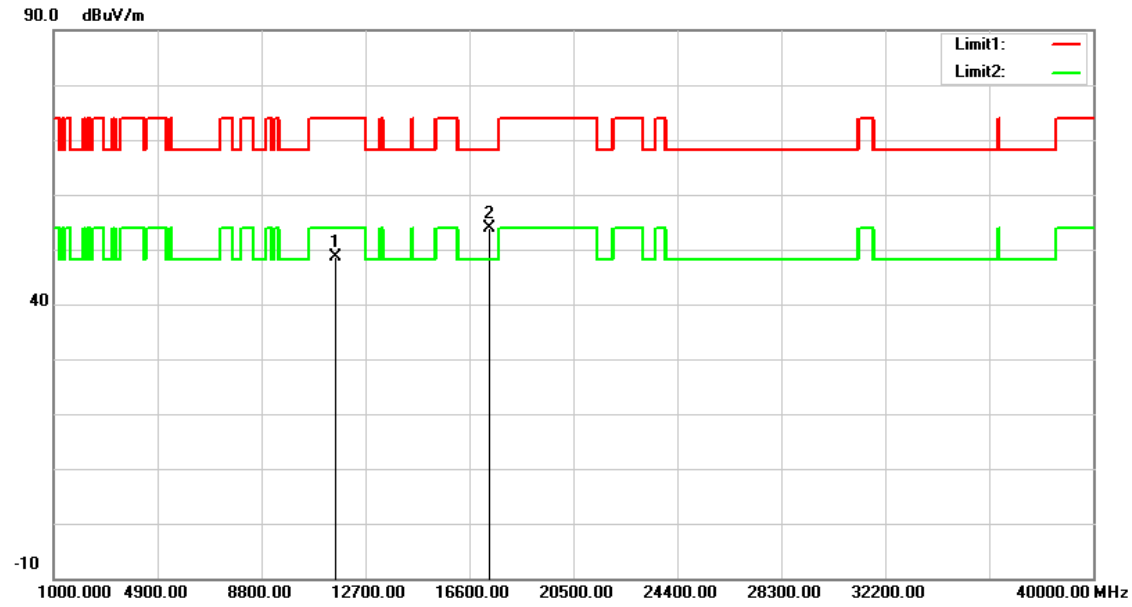


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11570.000	36.04	12.59	48.63	74.00	-25.37	peak
2	17355.000	34.59	19.32	53.91	68.20	-14.29	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5785 MHz		
Mode:	Mode 16		
Ant.Polar.:	Vertical		

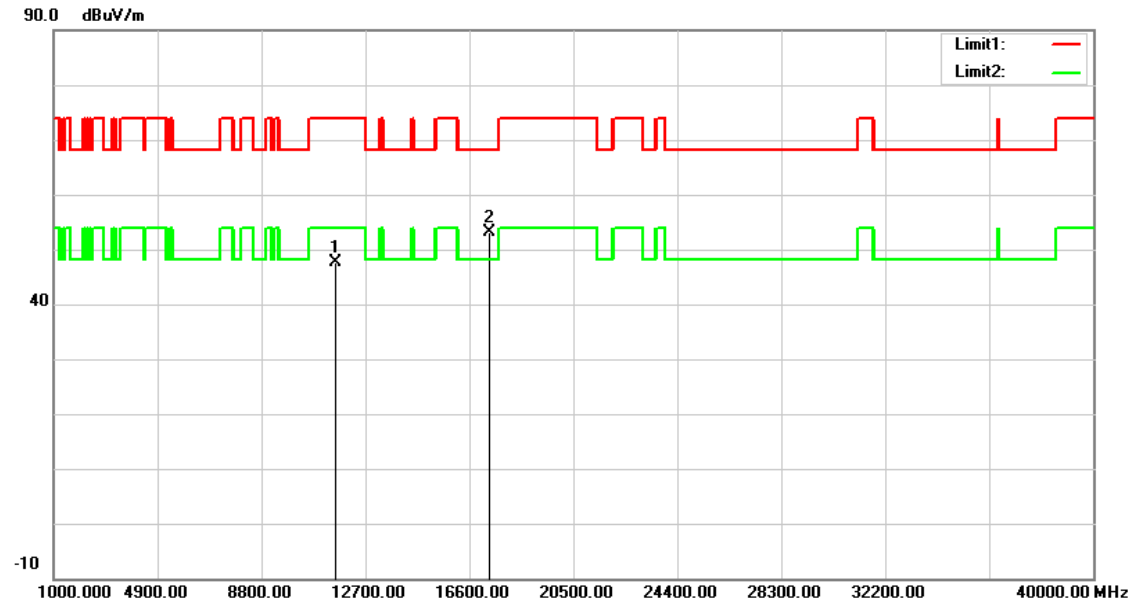


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11570.000	35.12	12.59	47.71	74.00	-26.29	peak
2	17355.000	33.76	19.32	53.08	68.20	-15.12	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5825 MHz		
Mode:	Mode 16		
Ant.Polar.:	Horizontal		

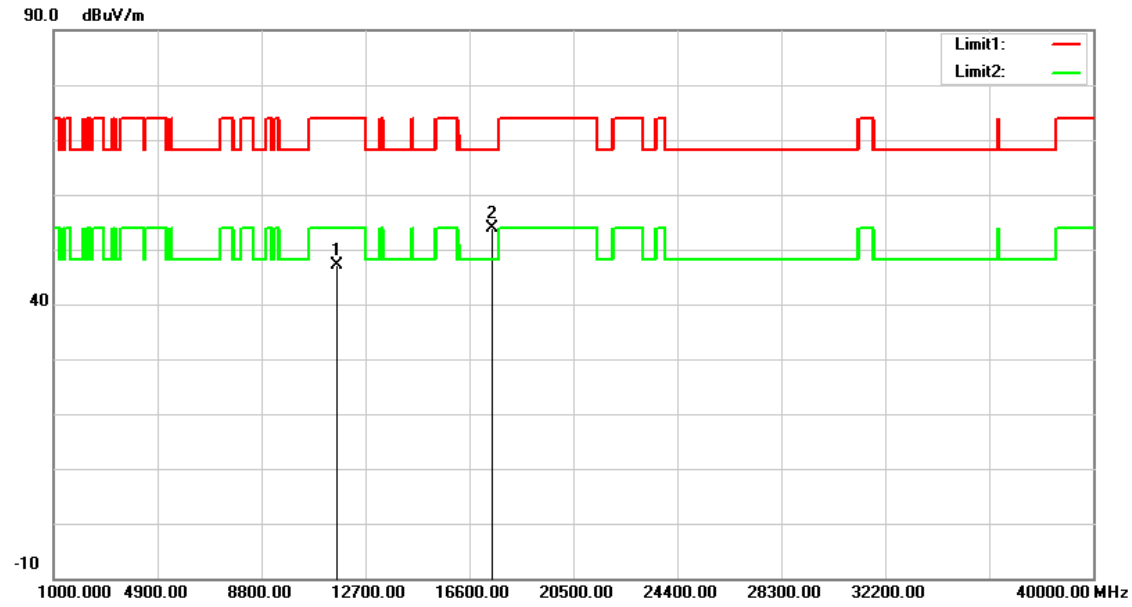


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11650.000	34.71	12.48	47.19	74.00	-26.81	peak
2	17475.000	33.67	20.13	53.80	68.20	-14.40	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5825 MHz		
Mode:	Mode 16		
Ant.Polar.:	Vertical		

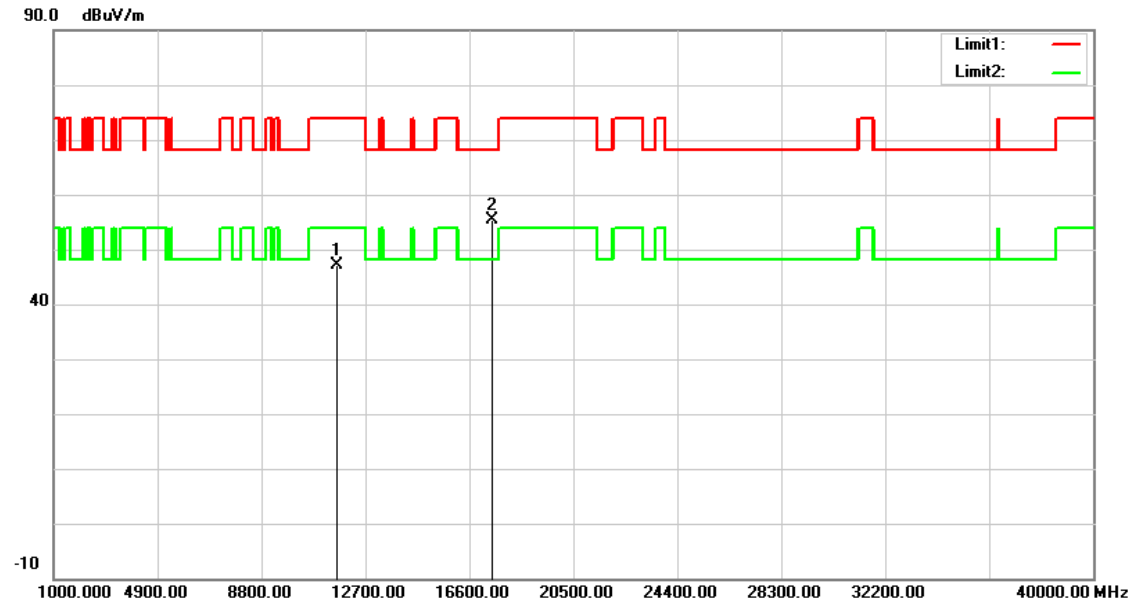


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11650.000	34.77	12.48	47.25	74.00	-26.75	peak
2	17475.000	35.19	20.13	55.32	68.20	-12.88	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5190 MHz		
Mode:	Mode 17		
Ant.Polar.:	Horizontal		

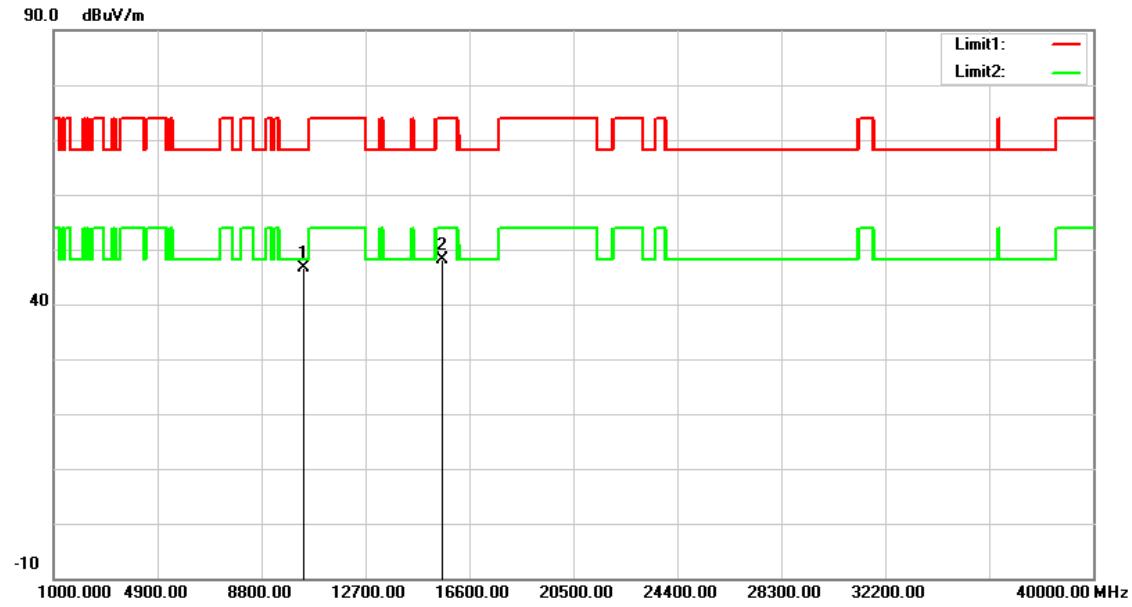


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10380.000	34.84	11.75	46.59	68.20	-21.61	peak
2	15570.000	33.77	14.45	48.22	74.00	-25.78	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5190 MHz		
Mode:	Mode 17		
Ant.Polar.:	Vertical		

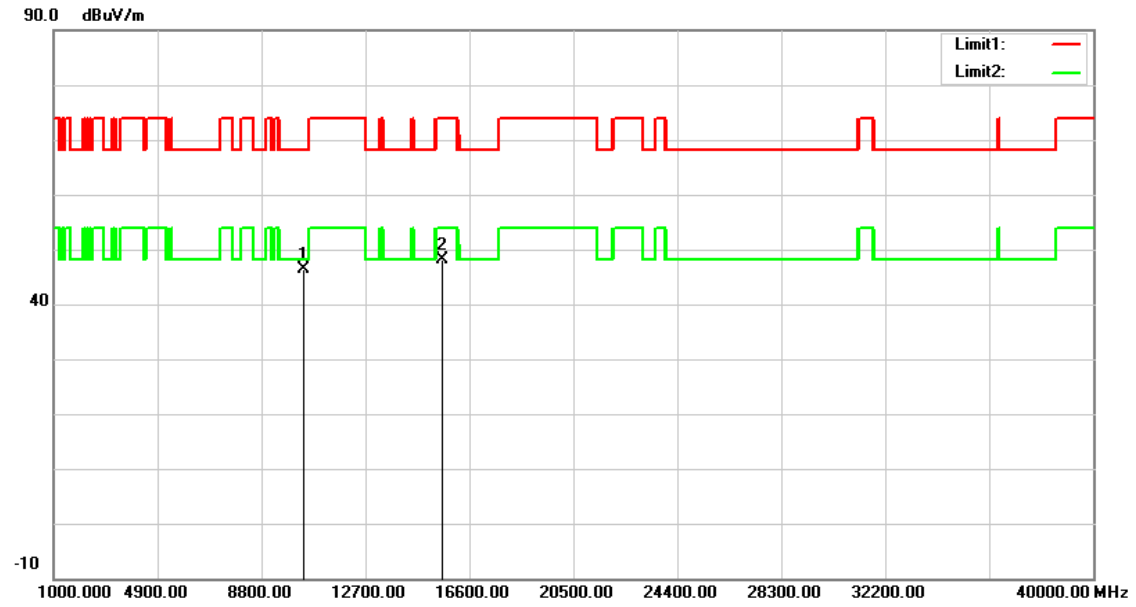


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10380.000	34.52	11.75	46.27	68.20	-21.93	peak
2	15570.000	33.64	14.45	48.09	74.00	-25.91	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5230 MHz		
Mode:	Mode 17		
Ant.Polar.:	Horizontal		

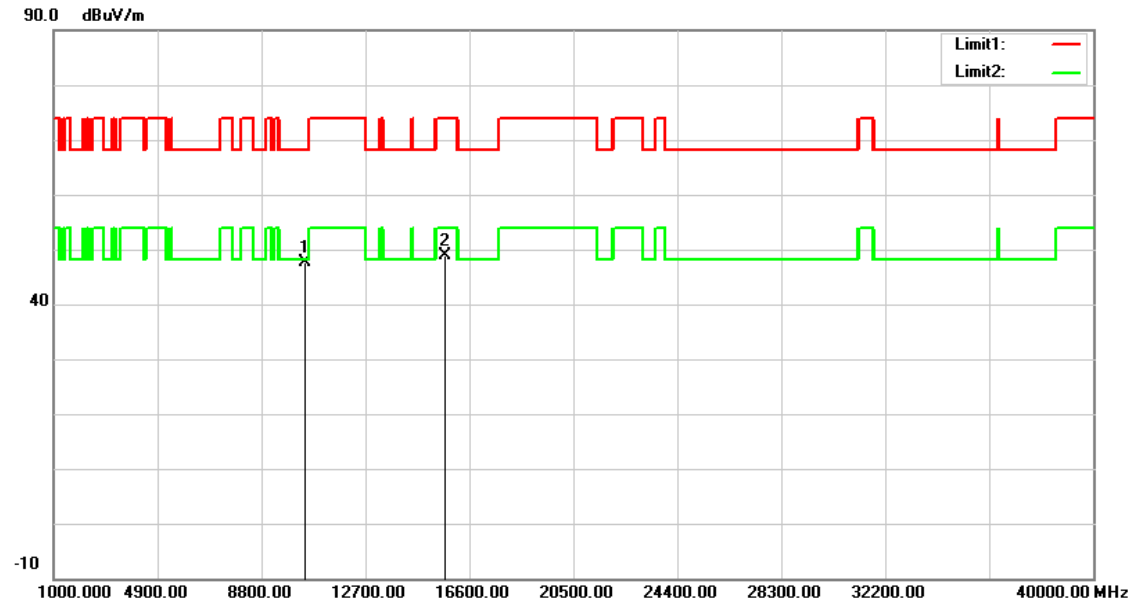


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10460.000	35.56	11.95	47.51	68.20	-20.69	peak
2	15690.000	34.76	14.19	48.95	74.00	-25.05	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5230 MHz		
Mode:	Mode 17		
Ant.Polar.:	Vertical		

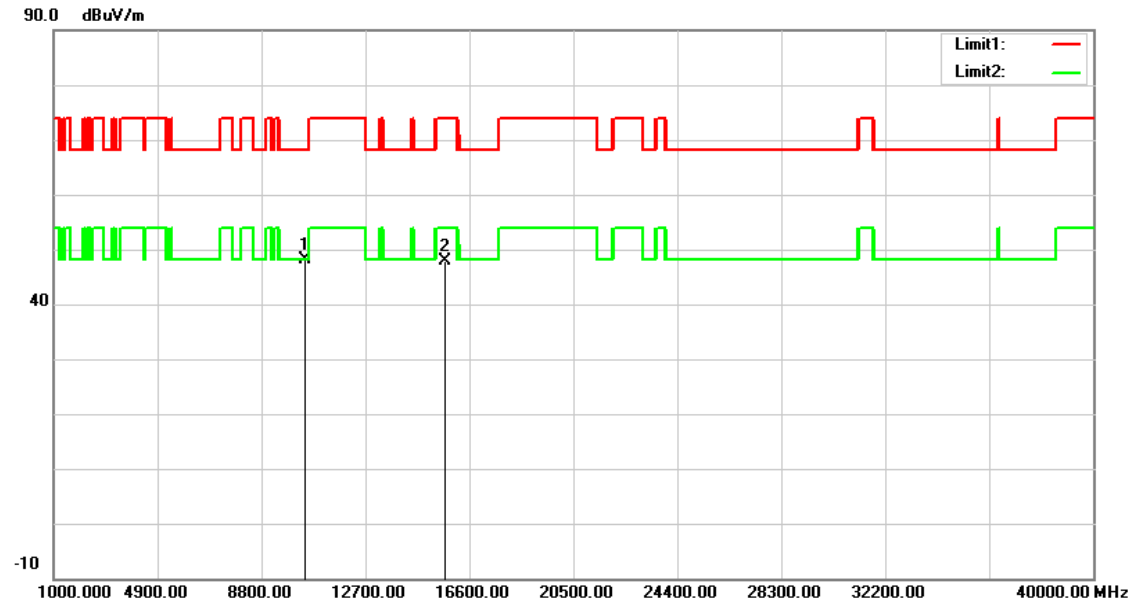


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10460.000	36.18	11.95	48.13	68.20	-20.07	peak
2	15690.000	33.72	14.19	47.91	74.00	-26.09	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5270 MHz		
Mode:	Mode 17		
Ant.Polar.:	Horizontal		

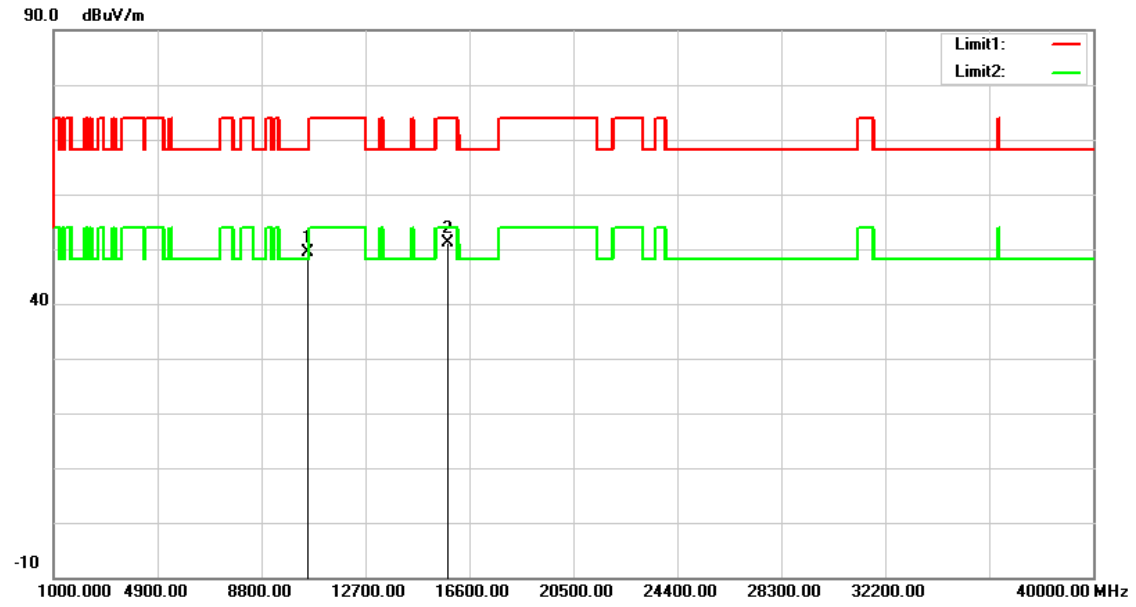


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10540.000	33.50	15.82	49.32	68.20	-18.88	peak
2	15810.000	33.29	17.87	51.16	74.00	-22.84	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5270 MHz		
Mode:	Mode 17		
Ant.Polar.:	Vertical		

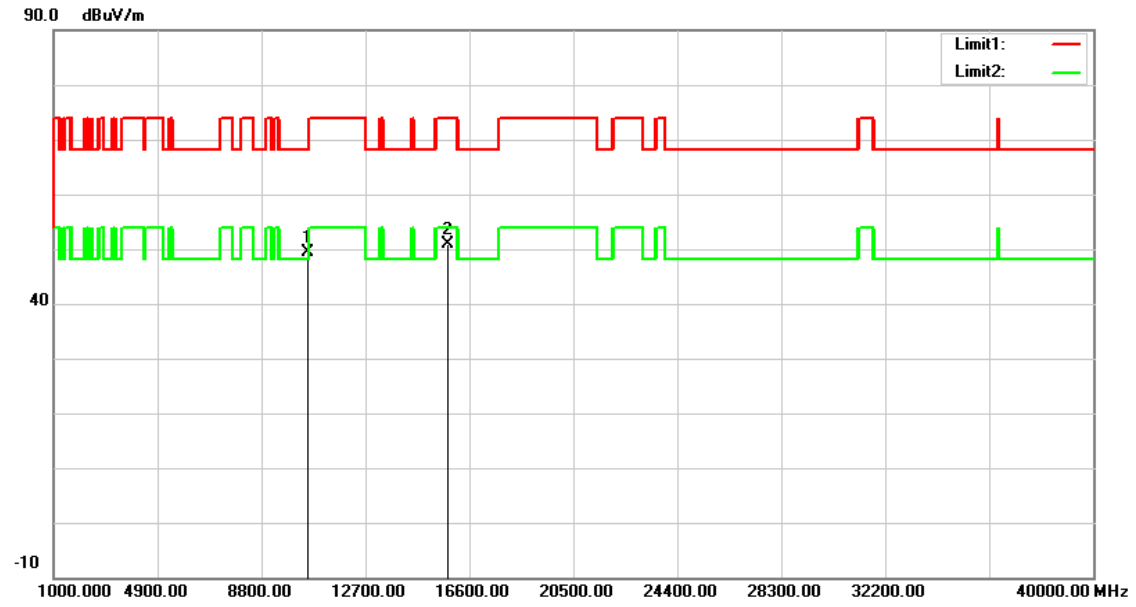


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10540.000	33.58	15.82	49.40	68.20	-18.80	peak
2	15810.000	33.13	17.87	51.00	74.00	-23.00	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5310 MHz		
Mode:	Mode 17		
Ant.Polar.:	Horizontal		

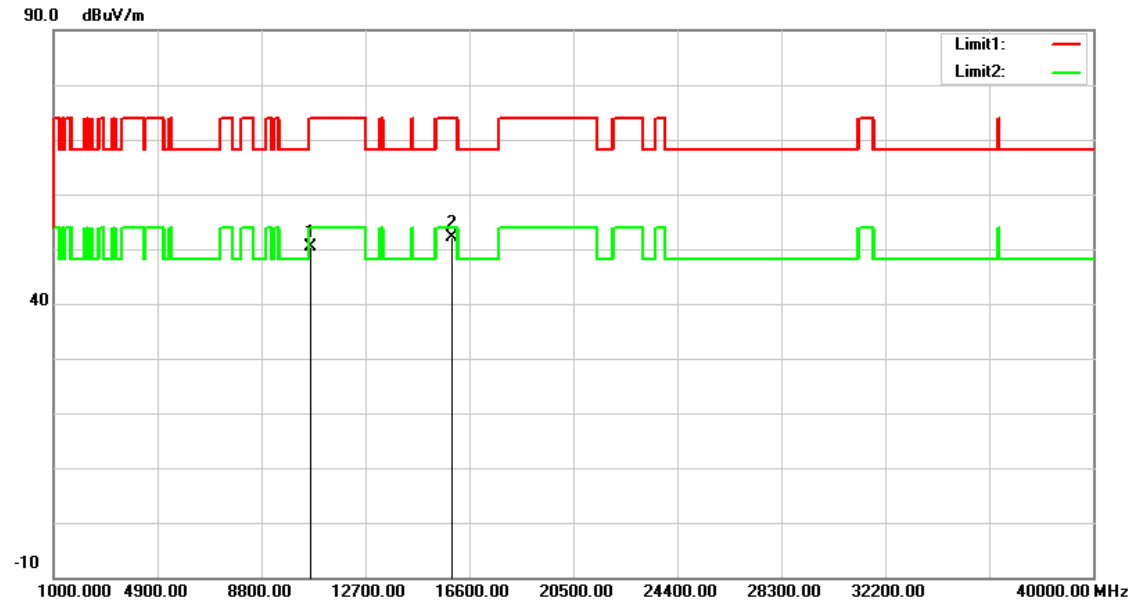


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10620.000	34.31	15.95	50.26	74.00	-23.74	peak
2	15930.000	34.36	17.67	52.03	74.00	-21.97	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5310 MHz		
Mode:	Mode 17		
Ant.Polar.:	Vertical		

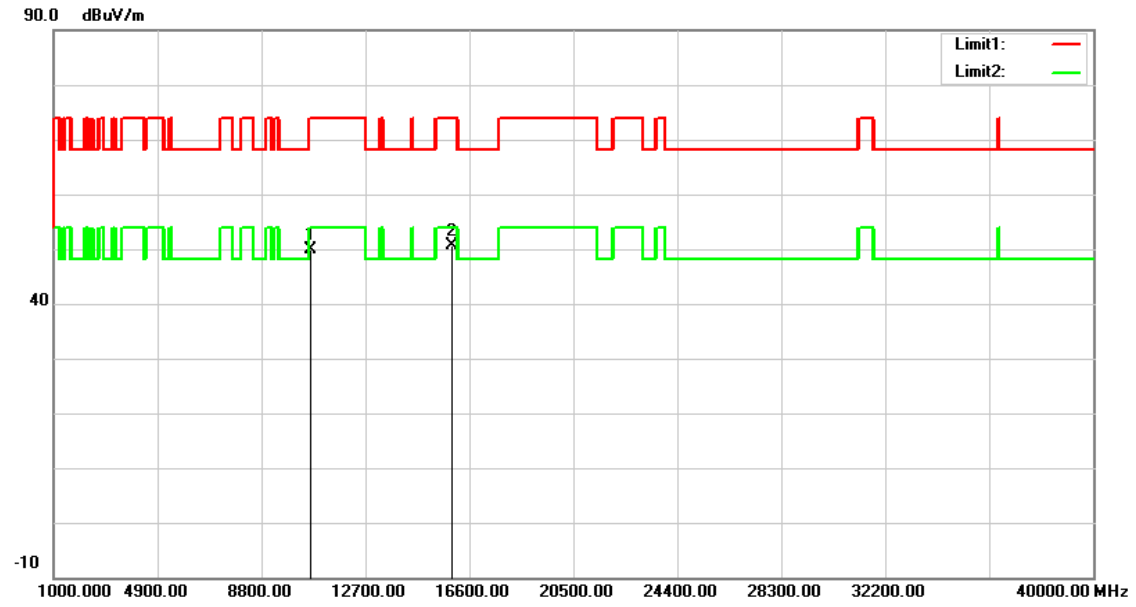


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10620.000	33.85	15.95	49.80	74.00	-24.20	peak
2	15930.000	32.96	17.67	50.63	74.00	-23.37	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5510 MHz		
Mode:	Mode 17		
Ant.Polar.:	Horizontal		

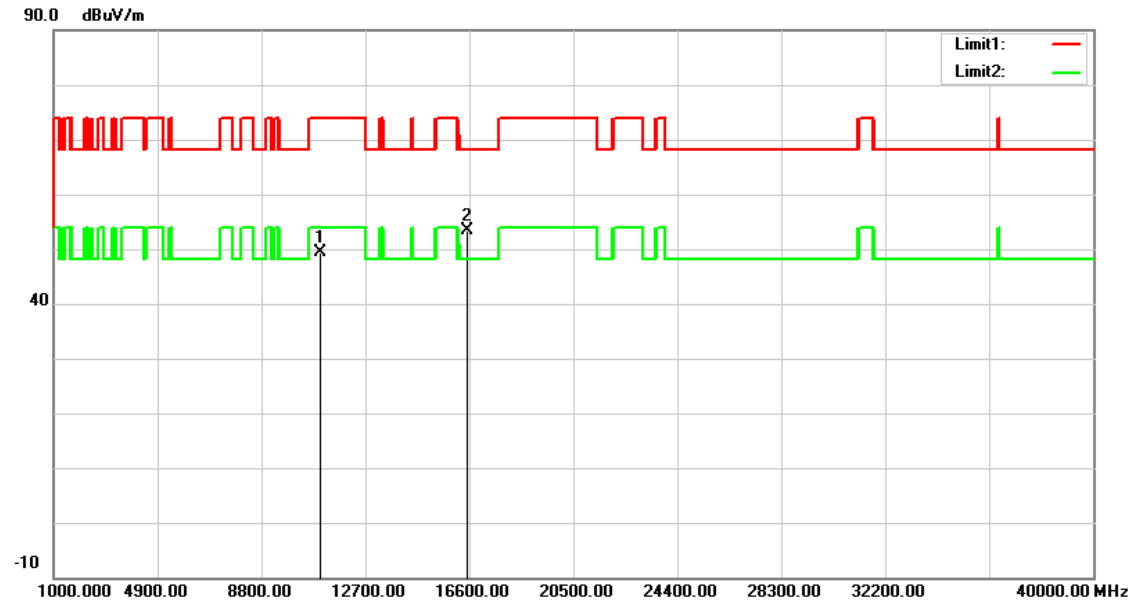


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11020.000	32.67	16.60	49.27	74.00	-24.73	peak
2	16530.000	33.45	20.00	53.45	68.20	-14.75	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5510 MHz		
Mode:	Mode 17		
Ant.Polar.:	Vertical		

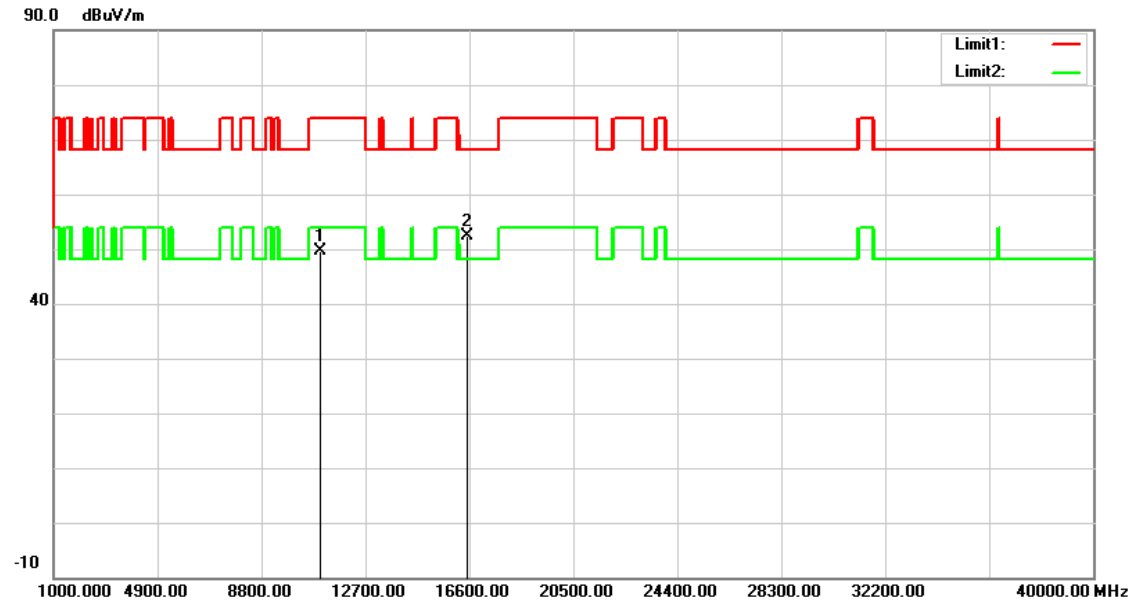


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11020.000	33.07	16.60	49.67	74.00	-24.33	peak
2	16530.000	32.33	20.00	52.33	68.20	-15.87	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5550 MHz		
Mode:	Mode 17		
Ant.Polar.:	Horizontal		

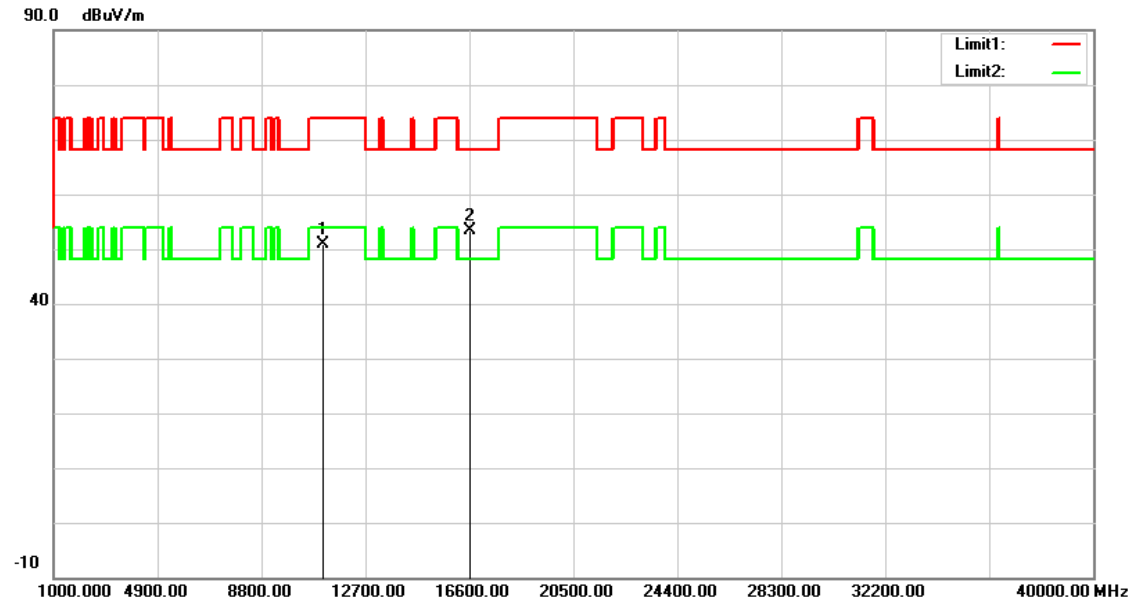


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11100.000	34.20	16.71	50.91	74.00	-23.09	peak
2	16650.000	32.74	20.62	53.36	68.20	-14.84	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5550 MHz		
Mode:	Mode 17		
Ant.Polar.:	Vertical		

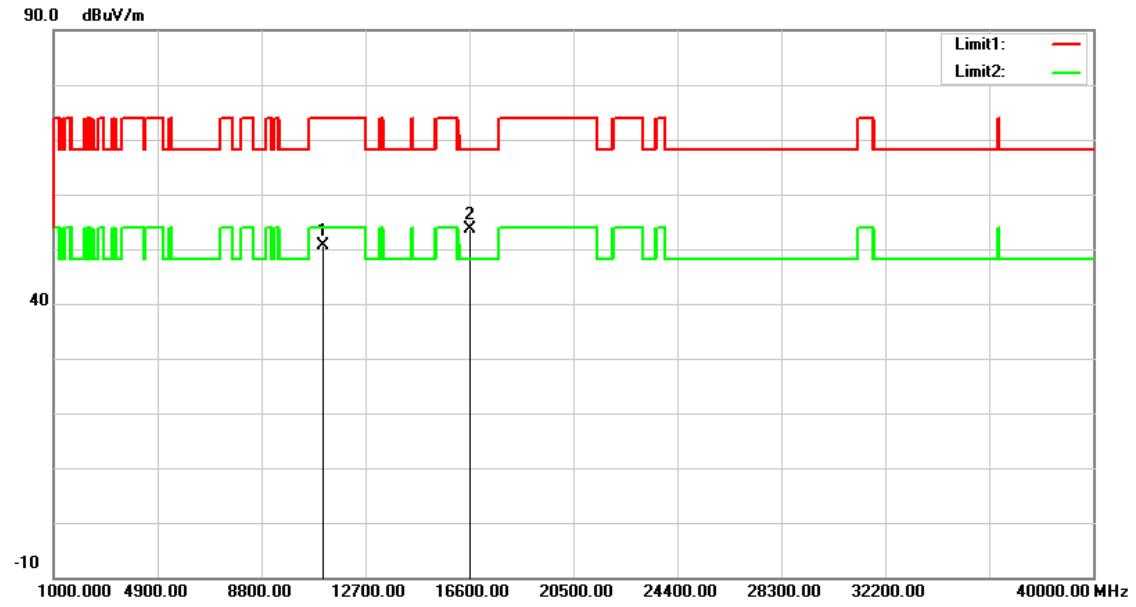


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11100.000	33.86	16.71	50.57	74.00	-23.43	peak
2	16650.000	32.99	20.62	53.61	68.20	-14.59	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5670 MHz		
Mode:	Mode 17		
Ant.Polar.:	Horizontal		

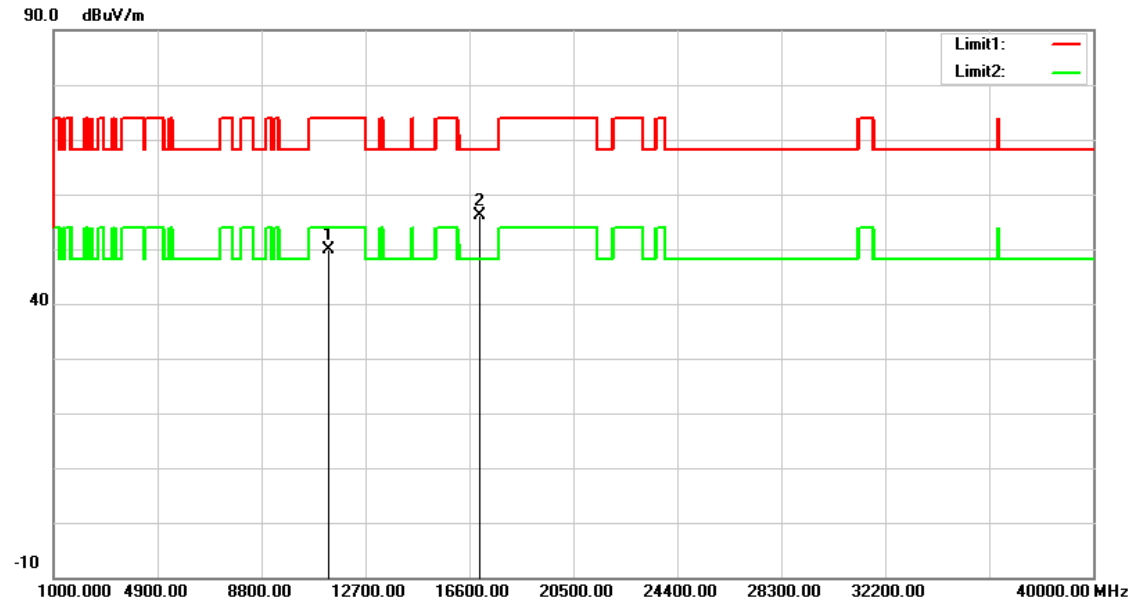


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11340.000	32.74	17.03	49.77	74.00	-24.23	peak
2	17010.000	33.73	22.46	56.19	68.20	-12.01	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5670 MHz		
Mode:	Mode 17		
Ant.Polar.:	Vertical		

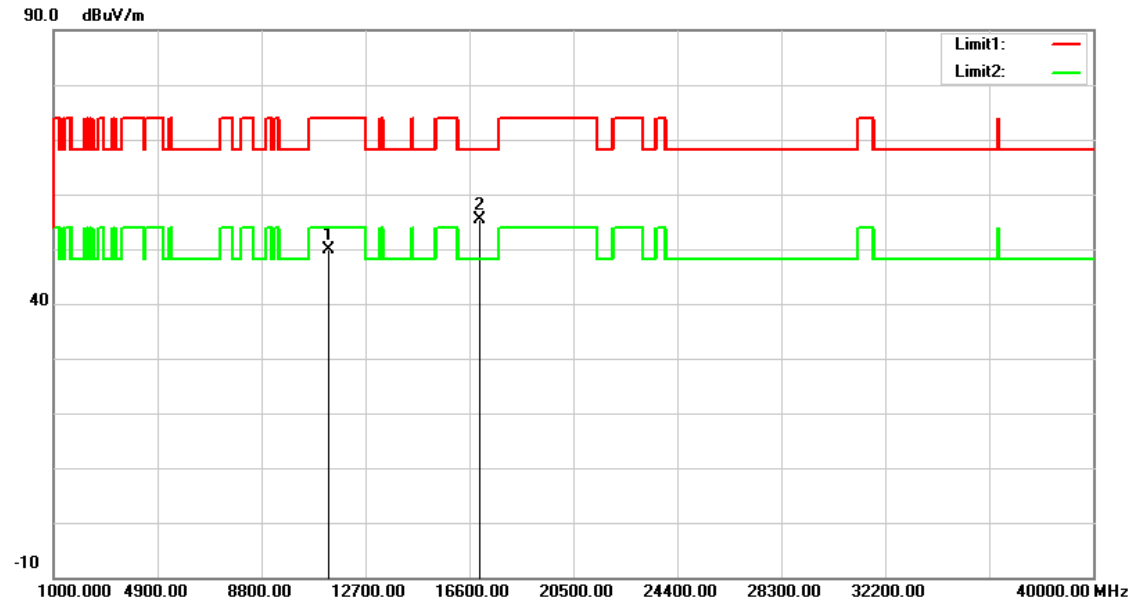


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11340.000	32.90	17.03	49.93	74.00	-24.07	peak
2	17010.000	32.96	22.46	55.42	68.20	-12.78	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5755 MHz		
Mode:	Mode 17		
Ant.Polar.:	Horizontal		

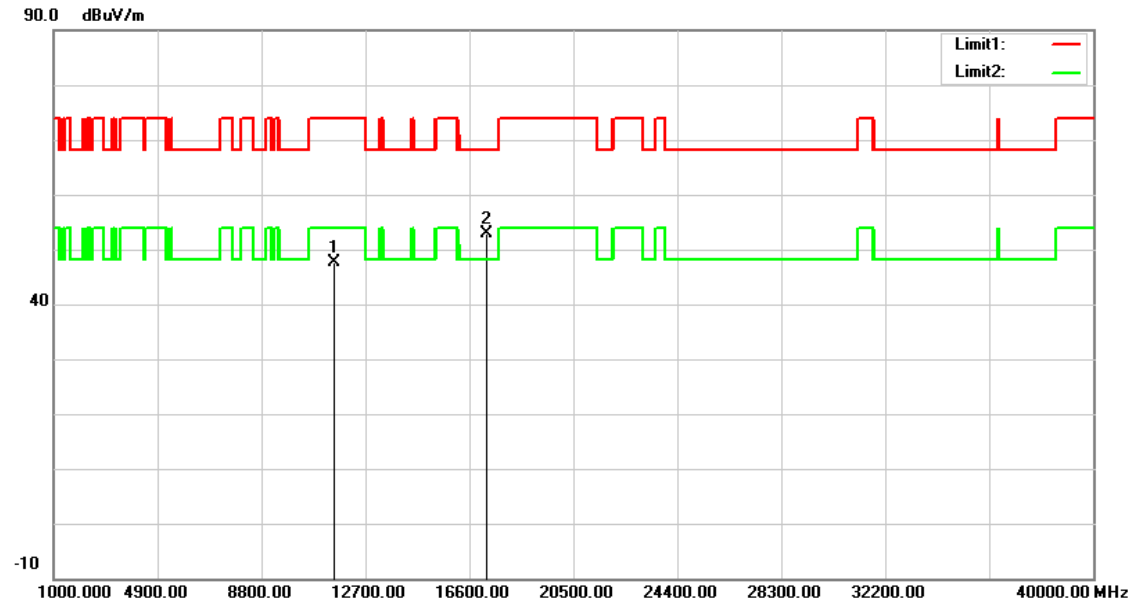


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11510.000	34.88	12.68	47.56	74.00	-26.44	peak
2	17265.000	34.25	18.72	52.97	68.20	-15.23	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5755 MHz		
Mode:	Mode 17		
Ant.Polar.:	Vertical		

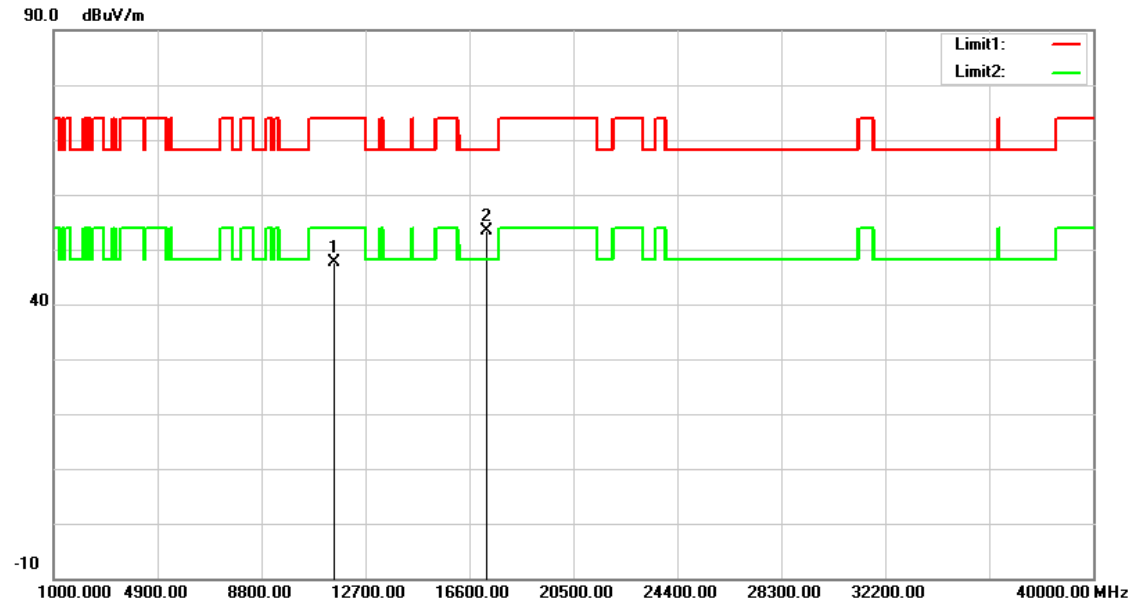


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11510.000	34.86	12.68	47.54	74.00	-26.46	peak
2	17265.000	34.66	18.72	53.38	68.20	-14.82	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5795 MHz		
Mode:	Mode 17		
Ant.Polar.:	Horizontal		

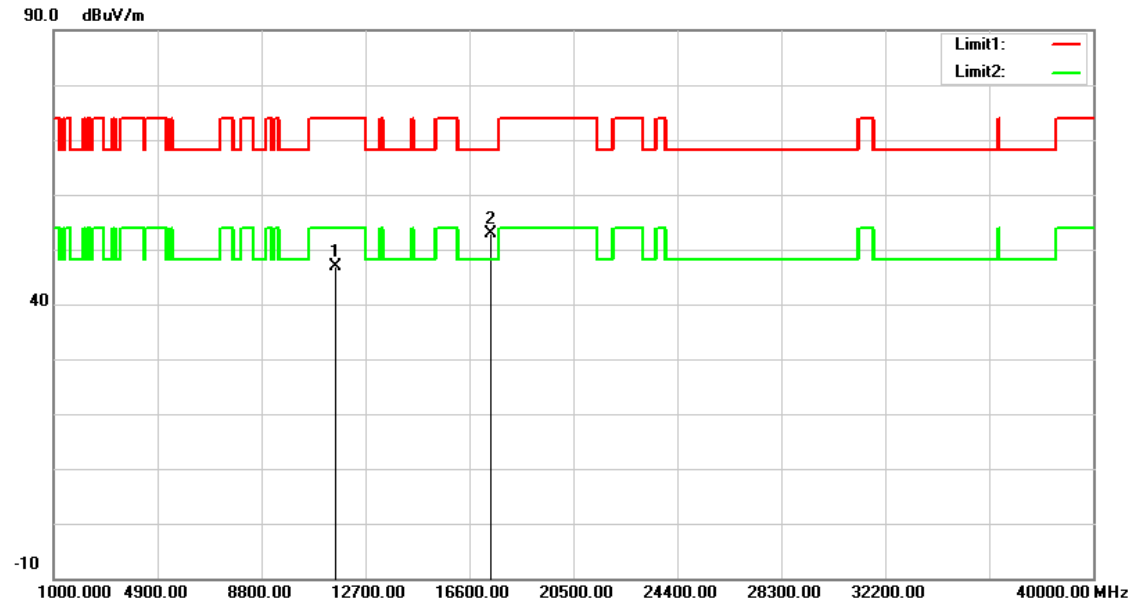


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11590.000	34.44	12.56	47.00	74.00	-27.00	peak
2	17385.000	33.33	19.52	52.85	68.20	-15.35	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5795 MHz		
Mode:	Mode 17		
Ant.Polar.:	Vertical		

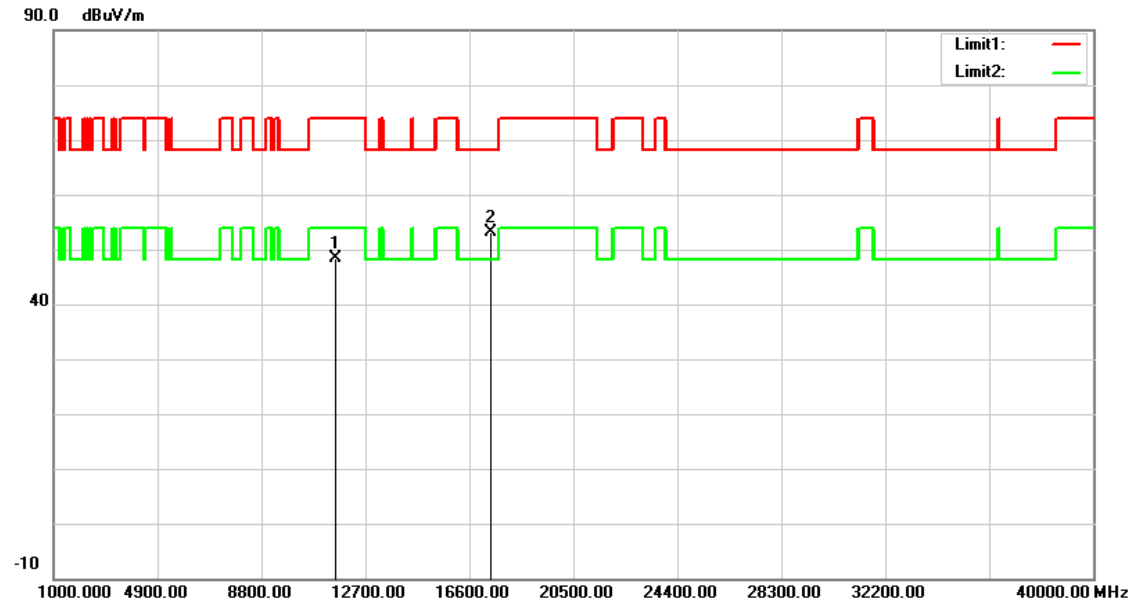


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11590.000	35.90	12.56	48.46	74.00	-25.54	peak
2	17385.000	33.50	19.52	53.02	68.20	-15.18	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5210 MHz		
Mode:	Mode 18		
Ant.Polar.:	Horizontal		

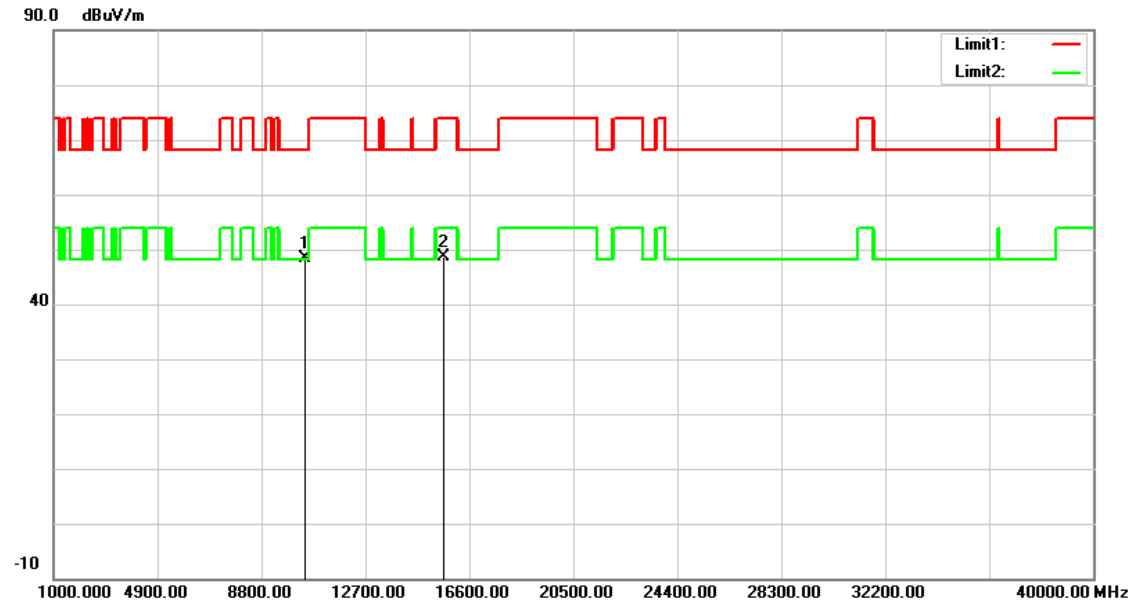


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10420.000	36.45	11.85	48.30	68.20	-19.90	peak
2	15630.000	34.23	14.33	48.56	74.00	-25.44	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5210 MHz		
Mode:	Mode 18		
Ant.Polar.:	Vertical		

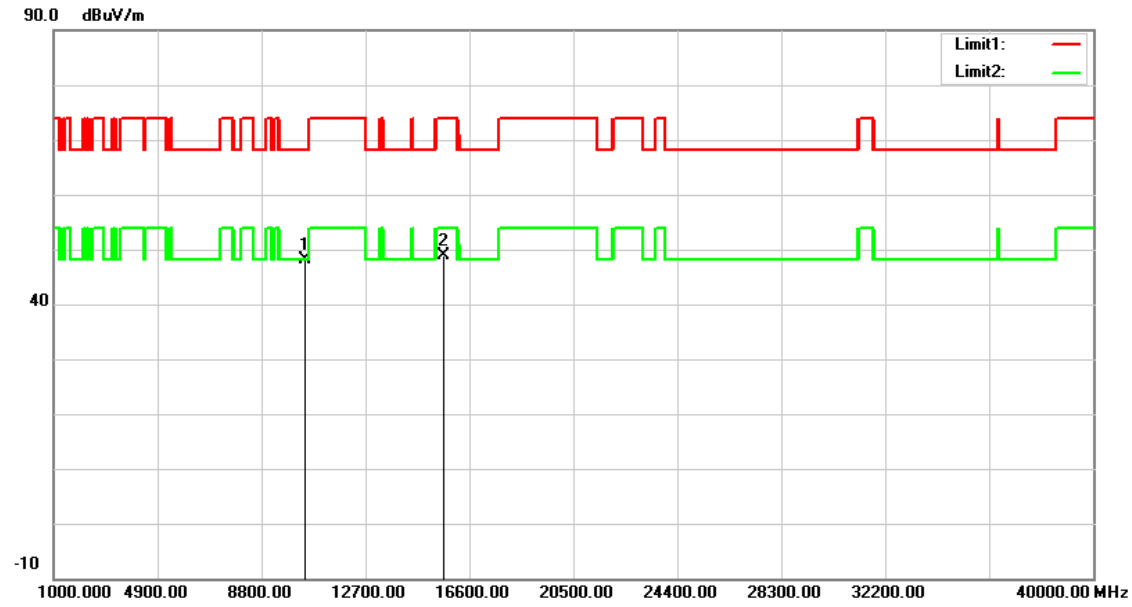


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10420.000	36.27	11.85	48.12	68.20	-20.08	peak
2	15630.000	34.60	14.33	48.93	74.00	-25.07	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5290 MHz		
Mode:	Mode 18		
Ant.Polar.:	Horizontal		

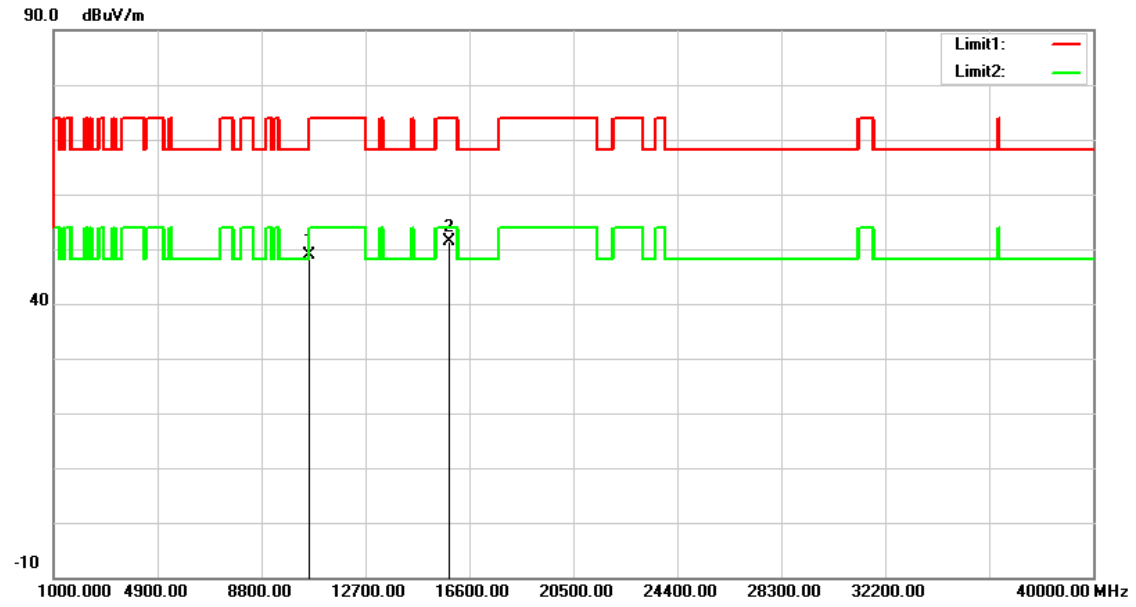


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10580.000	32.89	15.88	48.77	68.20	-19.43	peak
2	15870.000	33.54	17.77	51.31	74.00	-22.69	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5290 MHz		
Mode:	Mode 18		
Ant.Polar.:	Vertical		

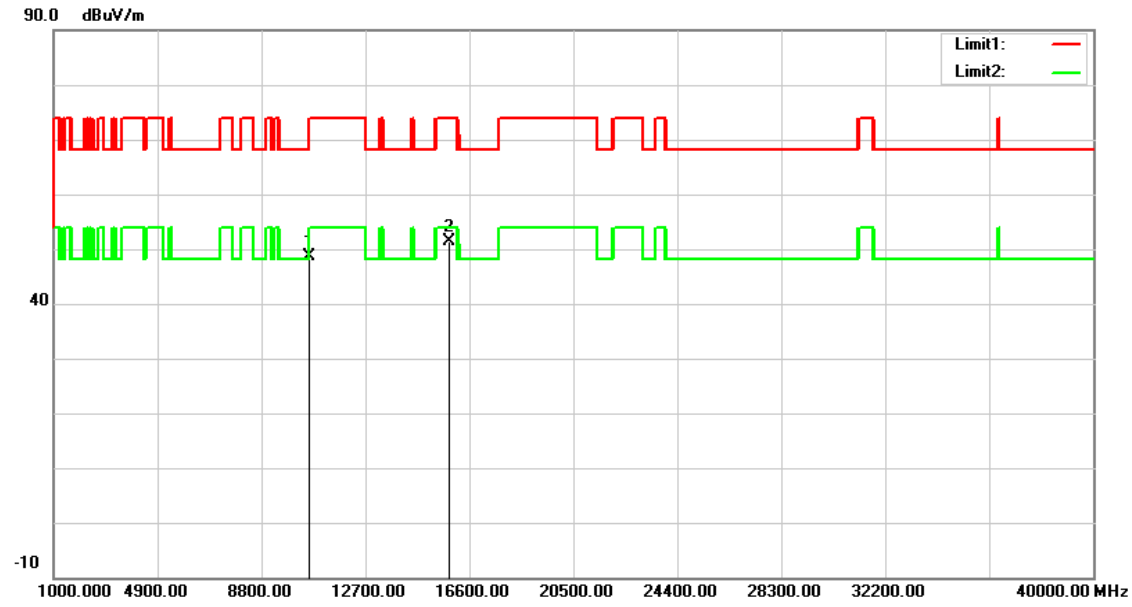


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10580.000	32.68	15.88	48.56	68.20	-19.64	peak
2	15870.000	33.60	17.77	51.37	74.00	-22.63	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5530 MHz		
Mode:	Mode 18		
Ant.Polar.:	Horizontal		

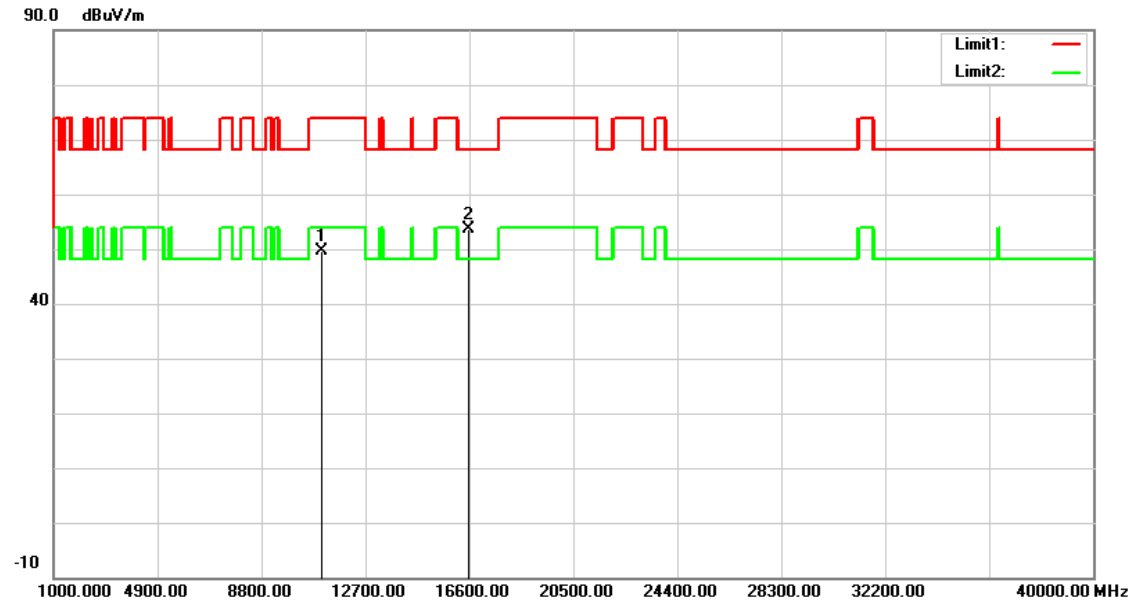


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11060.000	32.97	16.65	49.62	74.00	-24.38	peak
2	16590.000	33.36	20.31	53.67	68.20	-14.53	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5530 MHz		
Mode:	Mode 18		
Ant.Polar.:	Vertical		

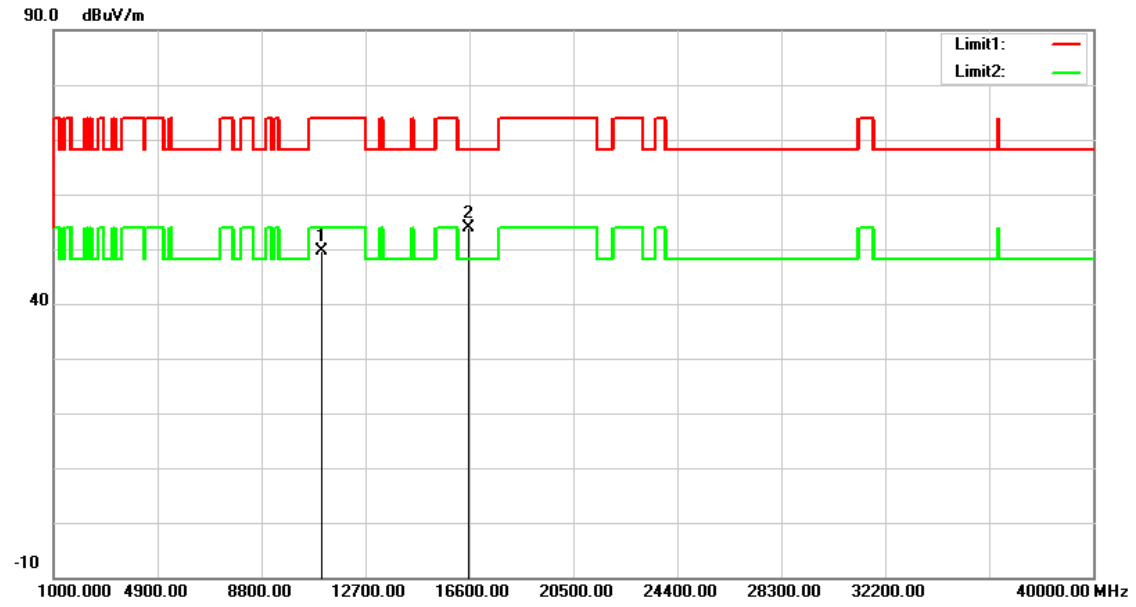


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11060.000	32.88	16.65	49.53	74.00	-24.47	peak
2	16590.000	33.67	20.31	53.98	68.20	-14.22	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5775 MHz		
Mode:	Mode 18		
Ant.Polar.:	Horizontal		

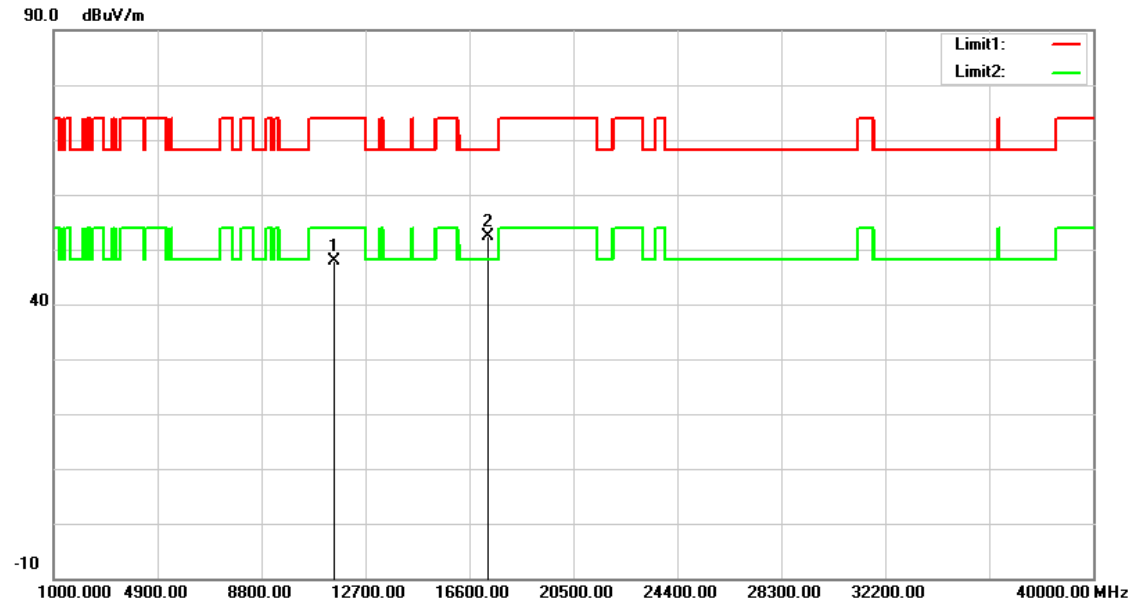


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11550.000	35.35	12.62	47.97	74.00	-26.03	peak
2	17325.000	33.26	19.12	52.38	68.20	-15.82	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5775 MHz		
Mode:	Mode 18		
Ant.Polar.:	Vertical		

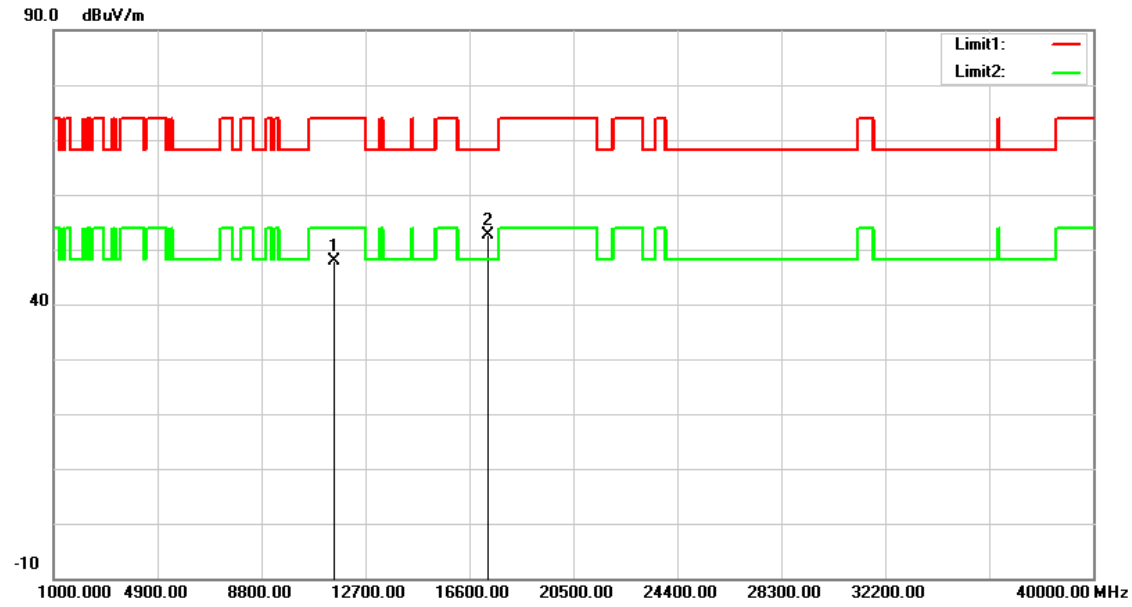

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11550.000	35.37	12.62	47.99	74.00	-26.01	peak
2	17325.000	33.39	19.12	52.51	68.20	-15.69	peak


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

頻帶邊緣

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5180 MHz		
Mode:	Mode 10		
Ant.Polar.:	Horizontal		

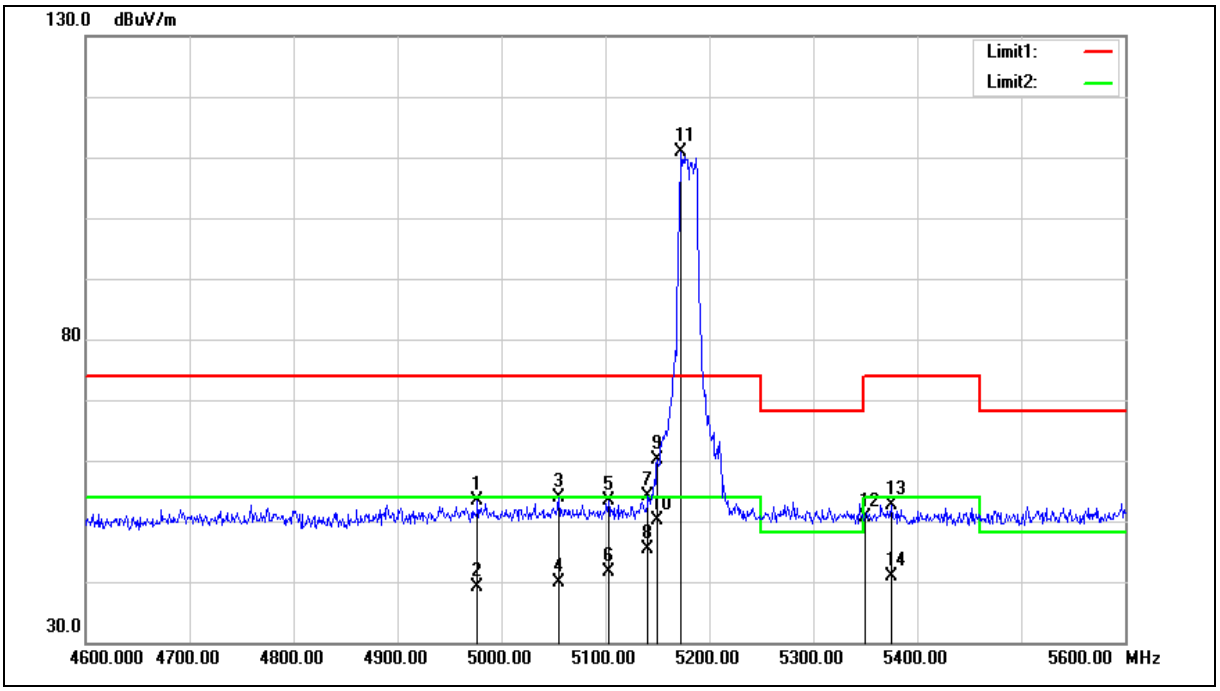

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5180 MHz		
Mode:	Mode 10		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4977.000	54.22	-0.83	53.39	74.00	-20.61	peak
2	4977.000	40.01	-0.83	39.18	54.00	-14.82	AVG
3	5055.000	54.51	-0.66	53.85	74.00	-20.15	peak
4	5055.000	40.44	-0.66	39.78	54.00	-14.22	AVG
5	5103.000	53.98	-0.57	53.41	74.00	-20.59	peak
6	5103.000	42.13	-0.57	41.56	54.00	-12.44	AVG
7	5141.000	54.56	-0.49	54.07	74.00	-19.93	peak
8	5141.000	45.92	-0.49	45.43	54.00	-8.57	AVG
9	5150.000	60.66	-0.48	60.18	74.00	-13.82	peak
10	5150.000	50.73	-0.48	50.25	54.00	-3.75	AVG
11	5173.000	111.43	-0.43	111.00	--	--	peak
12	5350.000	50.68	-0.08	50.60	74.00	-23.40	peak
13	5375.000	52.61	-0.03	52.58	74.00	-21.42	peak
14	5375.000	40.95	-0.03	40.92	54.00	-13.08	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5180 MHz		
Mode:	Mode 10		
Ant.Polar.:	Vertical		

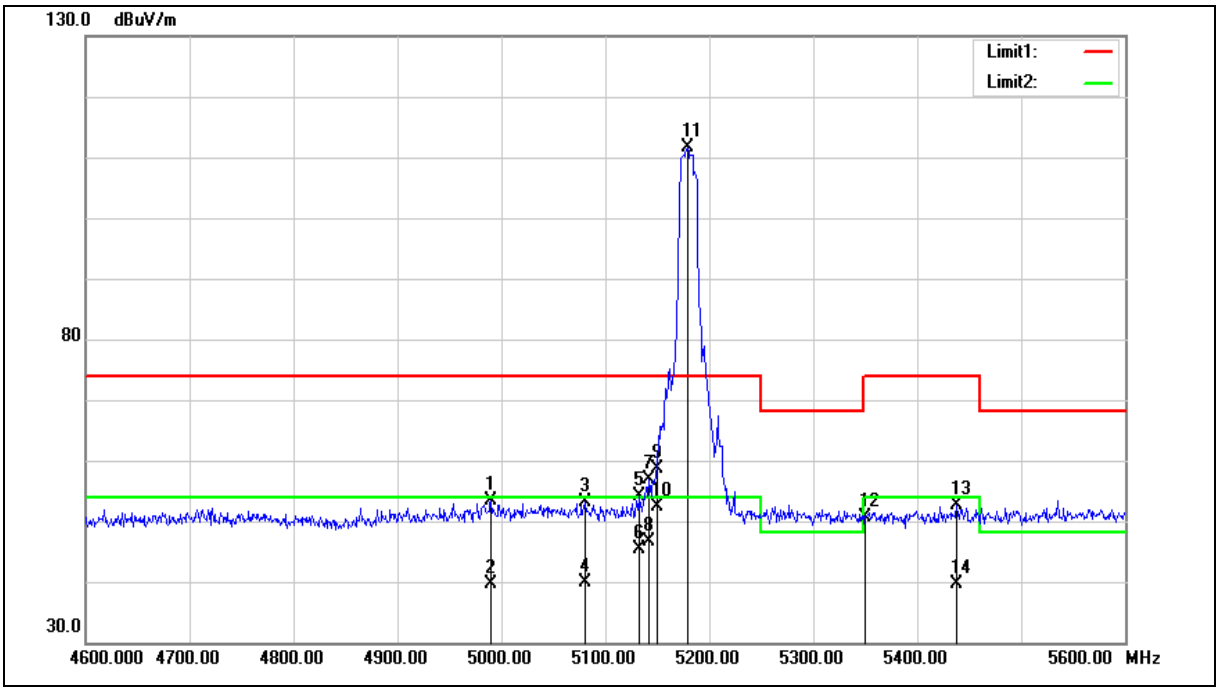

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5180 MHz		
Mode:	Mode 10		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4990.000	54.09	-0.79	53.30	74.00	-20.70	peak
2	4990.000	40.43	-0.79	39.64	54.00	-14.36	AVG
3	5081.000	53.83	-0.61	53.22	74.00	-20.78	peak
4	5081.000	40.39	-0.61	39.78	54.00	-14.22	AVG
5	5132.000	54.52	-0.51	54.01	74.00	-19.99	peak
6	5132.000	45.90	-0.51	45.39	54.00	-8.61	AVG
7	5142.000	57.37	-0.49	56.88	74.00	-17.12	peak
8	5142.000	47.23	-0.49	46.74	54.00	-7.26	AVG
9	5150.000	58.99	-0.48	58.51	74.00	-15.49	peak
10	5150.000	52.88	-0.48	52.40	54.00	-1.60	AVG
11	5179.000	111.95	-0.42	111.53	--	--	peak
12	5350.000	50.67	-0.08	50.59	74.00	-23.41	peak
13	5438.000	52.50	0.09	52.59	74.00	-21.41	peak
14	5438.000	39.42	0.09	39.51	54.00	-14.49	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5200 MHz		
Mode:	Mode 10		
Ant.Polar.:	Horizontal		

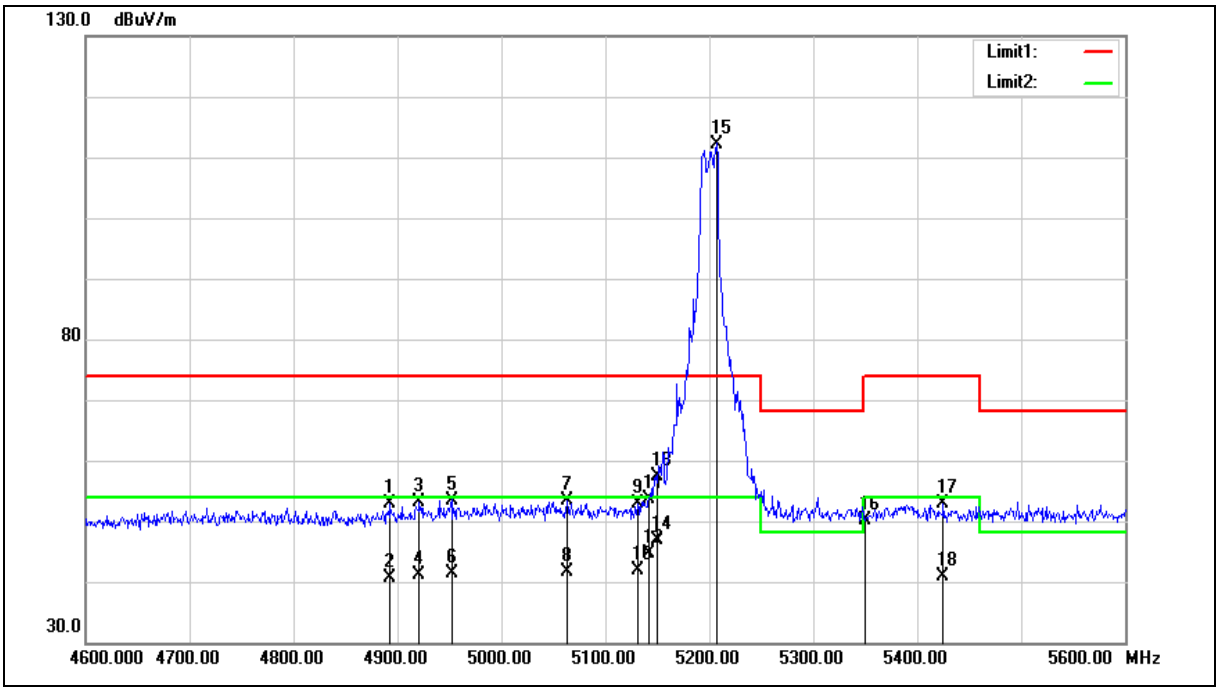

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5200 MHz		
Mode:	Mode 10		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4893.000	53.90	-1.06	52.84	74.00	-21.16	peak
2	4893.000	41.77	-1.06	40.71	54.00	-13.29	AVG
3	4921.000	54.01	-0.99	53.02	74.00	-20.98	peak
4	4921.000	42.05	-0.99	41.06	54.00	-12.94	AVG
5	4952.000	54.40	-0.90	53.50	74.00	-20.50	peak
6	4952.000	42.32	-0.90	41.42	54.00	-12.58	AVG
7	5063.000	54.02	-0.65	53.37	74.00	-20.63	peak
8	5063.000	42.21	-0.65	41.56	54.00	-12.44	AVG
9	5131.000	53.40	-0.52	52.88	74.00	-21.12	peak
10	5131.000	42.31	-0.52	41.79	54.00	-12.21	AVG
11	5142.000	54.07	-0.49	53.58	74.00	-20.42	peak
12	5142.000	45.13	-0.49	44.64	54.00	-9.36	AVG
13	5150.000	57.90	-0.48	57.42	74.00	-16.58	peak
14	5150.000	47.44	-0.48	46.96	54.00	-7.04	AVG
15	5207.000	112.52	-0.36	112.16	--	--	peak
16	5350.000	50.31	-0.08	50.23	74.00	-23.77	peak
17	5425.000	52.80	0.06	52.86	74.00	-21.14	peak
18	5425.000	40.81	0.06	40.87	54.00	-13.13	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5200 MHz		
Mode:	Mode 10		
Ant.Polar.:	Vertical		

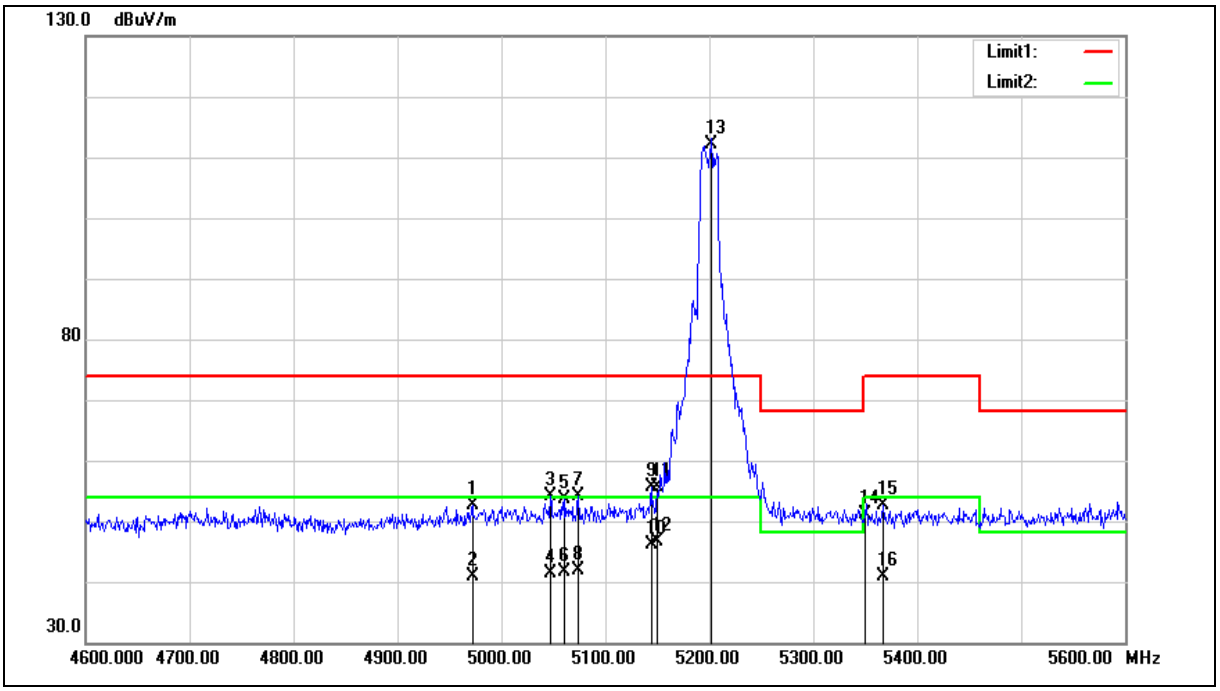

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5200 MHz		
Mode:	Mode 10		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4972.000	53.35	-0.84	52.51	74.00	-21.49	peak
2	4972.000	41.81	-0.84	40.97	54.00	-13.03	AVG
3	5047.000	54.82	-0.68	54.14	74.00	-19.86	peak
4	5047.000	42.11	-0.68	41.43	54.00	-12.57	AVG
5	5061.000	54.27	-0.65	53.62	74.00	-20.38	peak
6	5061.000	42.22	-0.65	41.57	54.00	-12.43	AVG
7	5074.000	54.64	-0.62	54.02	74.00	-19.98	peak
8	5074.000	42.55	-0.62	41.93	54.00	-12.07	AVG
9	5144.000	56.18	-0.48	55.70	74.00	-18.30	peak
10	5144.000	46.62	-0.48	46.14	54.00	-7.86	AVG
11	5150.000	56.06	-0.48	55.58	74.00	-18.42	peak
12	5150.000	47.01	-0.48	46.53	54.00	-7.47	AVG
13	5202.000	112.47	-0.37	112.10	--	--	peak
14	5350.000	51.18	-0.08	51.10	74.00	-22.90	peak
15	5367.000	52.70	-0.05	52.65	74.00	-21.35	peak
16	5367.000	40.85	-0.05	40.80	54.00	-13.20	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5240 MHz		
Mode:	Mode 10		
Ant.Polar.:	Horizontal		

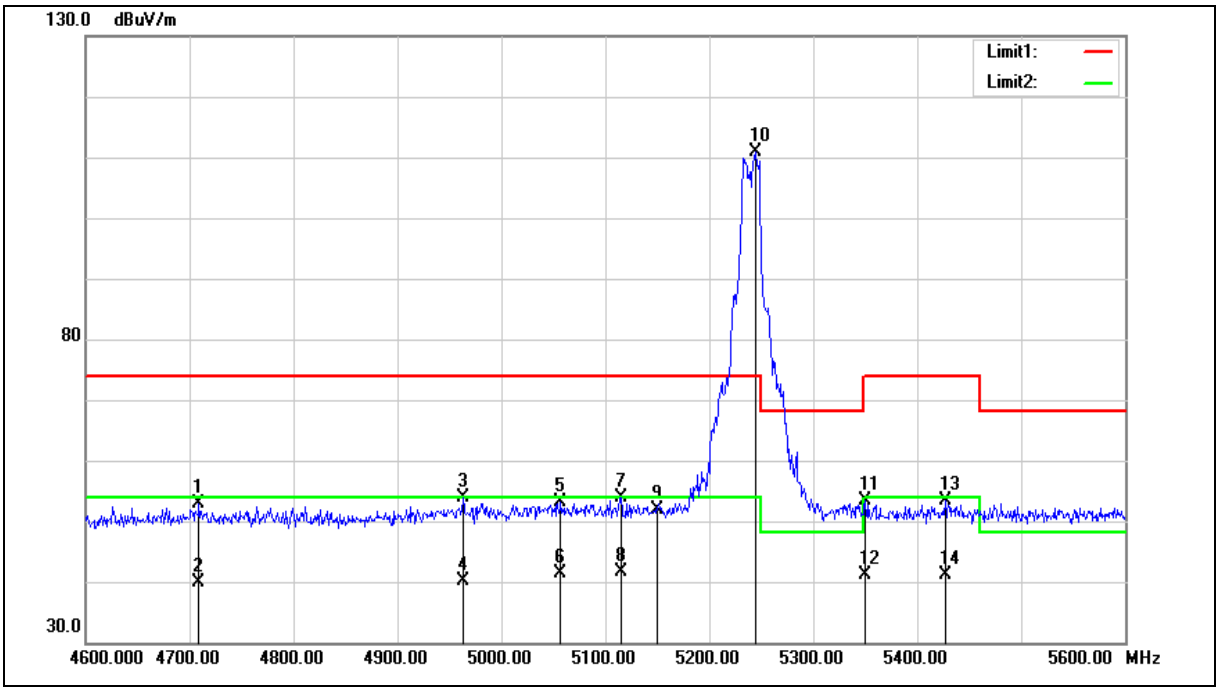

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5240 MHz		
Mode:	Mode 10		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4709.000	54.39	-1.57	52.82	74.00	-21.18	peak
2	4709.000	41.51	-1.57	39.94	54.00	-14.06	AVG
3	4963.000	54.75	-0.88	53.87	74.00	-20.13	peak
4	4963.000	40.94	-0.88	40.06	54.00	-13.94	AVG
5	5057.000	53.76	-0.65	53.11	74.00	-20.89	peak
6	5057.000	41.92	-0.65	41.27	54.00	-12.73	AVG
7	5115.000	54.46	-0.54	53.92	74.00	-20.08	peak
8	5115.000	42.13	-0.54	41.59	54.00	-12.41	AVG
9	5150.000	52.41	-0.48	51.93	74.00	-22.07	peak
10	5244.000	111.13	-0.28	110.85	--	--	peak
11	5350.000	53.39	-0.08	53.31	74.00	-20.69	peak
12	5350.000	41.31	-0.08	41.23	54.00	-12.77	AVG
13	5427.000	53.32	0.06	53.38	74.00	-20.62	peak
14	5427.000	40.97	0.06	41.03	54.00	-12.97	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5240 MHz		
Mode:	Mode 10		
Ant.Polar.:	Vertical		

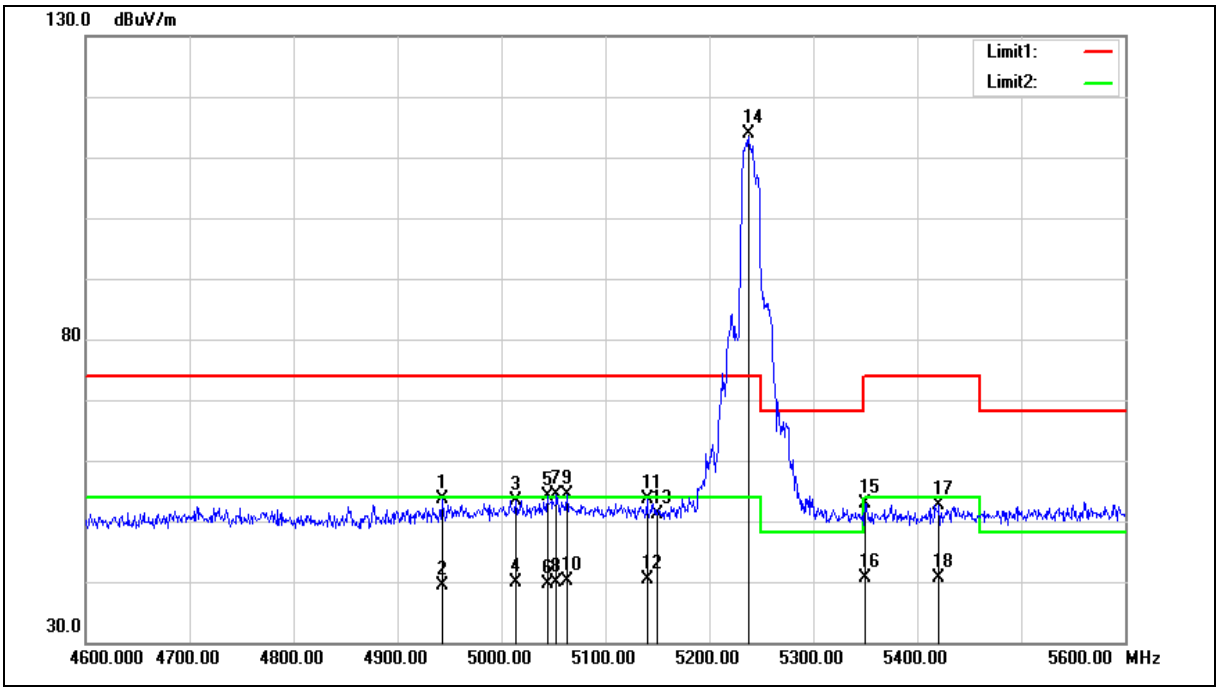

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5240 MHz		
Mode:	Mode 10		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4943.000	54.46	-0.93	53.53	74.00	-20.47	peak
2	4943.000	40.34	-0.93	39.41	54.00	-14.59	AVG
3	5014.000	54.24	-0.74	53.50	74.00	-20.50	peak
4	5014.000	40.60	-0.74	39.86	54.00	-14.14	AVG
5	5044.000	54.90	-0.68	54.22	74.00	-19.78	peak
6	5044.000	40.43	-0.68	39.75	54.00	-14.25	AVG
7	5053.000	54.95	-0.66	54.29	74.00	-19.71	peak
8	5053.000	40.63	-0.66	39.97	54.00	-14.03	AVG
9	5063.000	55.00	-0.65	54.35	74.00	-19.65	peak
10	5063.000	40.79	-0.65	40.14	54.00	-13.86	AVG
11	5140.000	54.10	-0.49	53.61	74.00	-20.39	peak
12	5140.000	40.95	-0.49	40.46	54.00	-13.54	AVG
13	5150.000	51.72	-0.48	51.24	74.00	-22.76	peak
14	5238.000	114.16	-0.31	113.85	--	--	peak
15	5350.000	52.91	-0.08	52.83	74.00	-21.17	peak
16	5350.000	40.61	-0.08	40.53	54.00	-13.47	AVG
17	5421.000	52.68	0.06	52.74	74.00	-21.26	peak
18	5421.000	40.62	0.06	40.68	54.00	-13.32	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5260 MHz		
Mode:	Mode 10		
Ant.Polar.:	Horizontal		

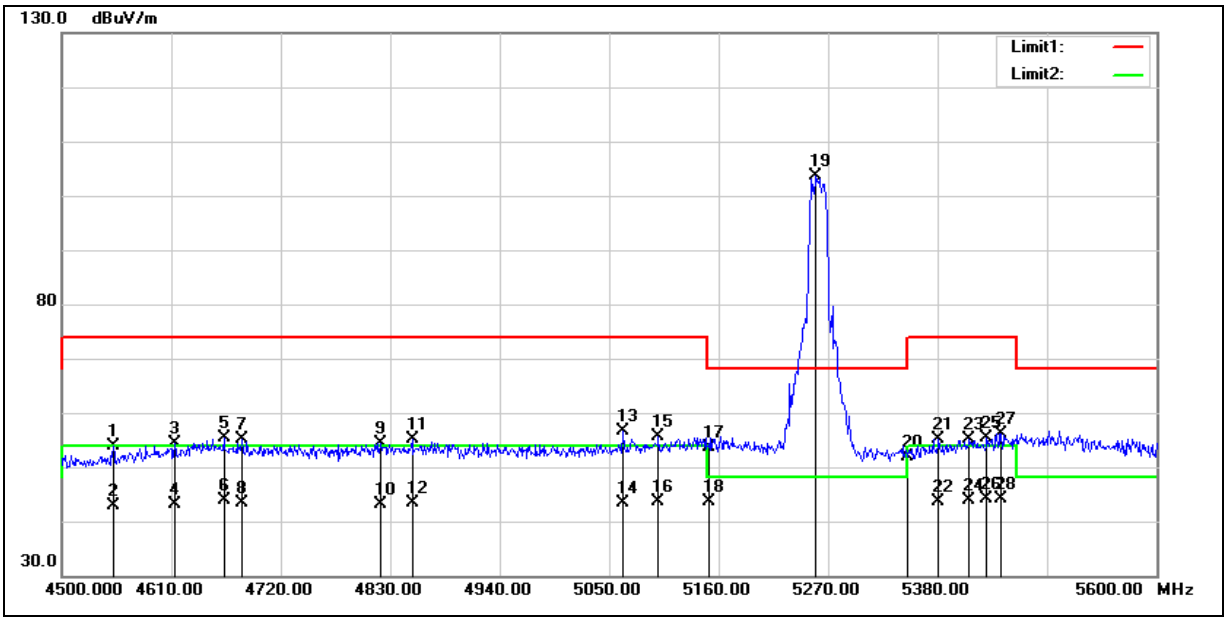

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5260 MHz		
Mode:	Mode 10		
Ant.Polar.:	Horizontal		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4551.700	50.20	3.61	53.81	74.00	-20.19	peak
2	4551.700	39.20	3.61	42.81	54.00	-11.19	AVG
3	4613.300	50.63	3.77	54.40	74.00	-19.60	peak
4	4613.300	39.42	3.77	43.19	54.00	-10.81	AVG
5	4662.800	51.56	3.89	55.45	74.00	-18.55	peak
6	4662.800	39.97	3.89	43.86	54.00	-10.14	AVG
7	4681.500	51.14	3.94	55.08	74.00	-18.92	peak
8	4681.500	39.54	3.94	43.48	54.00	-10.52	AVG
9	4820.100	50.17	4.29	54.46	74.00	-19.54	peak
10	4820.100	38.84	4.29	43.13	54.00	-10.87	AVG
11	4852.000	50.68	4.37	55.05	74.00	-18.95	peak
12	4852.000	38.99	4.37	43.36	54.00	-10.64	AVG
13	5064.300	51.80	4.91	56.71	74.00	-17.29	peak
14	5064.300	38.35	4.91	43.26	54.00	-10.74	AVG
15	5099.500	50.72	5.00	55.72	74.00	-18.28	peak
16	5099.500	38.73	5.00	43.73	54.00	-10.27	AVG
17	5150.000	48.53	5.12	53.65	74.00	-20.35	peak
18	5150.000	38.63	5.12	43.75	54.00	-10.25	AVG
19	5257.900	98.25	5.38	103.63	--	--	peak
20	5350.000	46.21	5.61	51.82	74.00	-22.18	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5260 MHz		
Mode:	Mode 10		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
21	5381.100	49.44	5.68	55.12	74.00	-18.88	peak
22	5381.100	38.03	5.68	43.71	54.00	-10.29	AVG
23	5411.900	49.30	5.76	55.06	74.00	-18.94	peak
24	5411.900	38.06	5.76	43.82	54.00	-10.18	AVG
25	5429.500	49.55	5.80	55.35	74.00	-18.65	peak
26	5429.500	38.22	5.80	44.02	54.00	-9.98	AVG
27	5443.800	50.39	5.84	56.23	74.00	-17.77	peak
28	5443.800	38.32	5.84	44.16	54.00	-9.84	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5260 MHz		
Mode:	Mode 10		
Ant.Polar.:	Vertical		

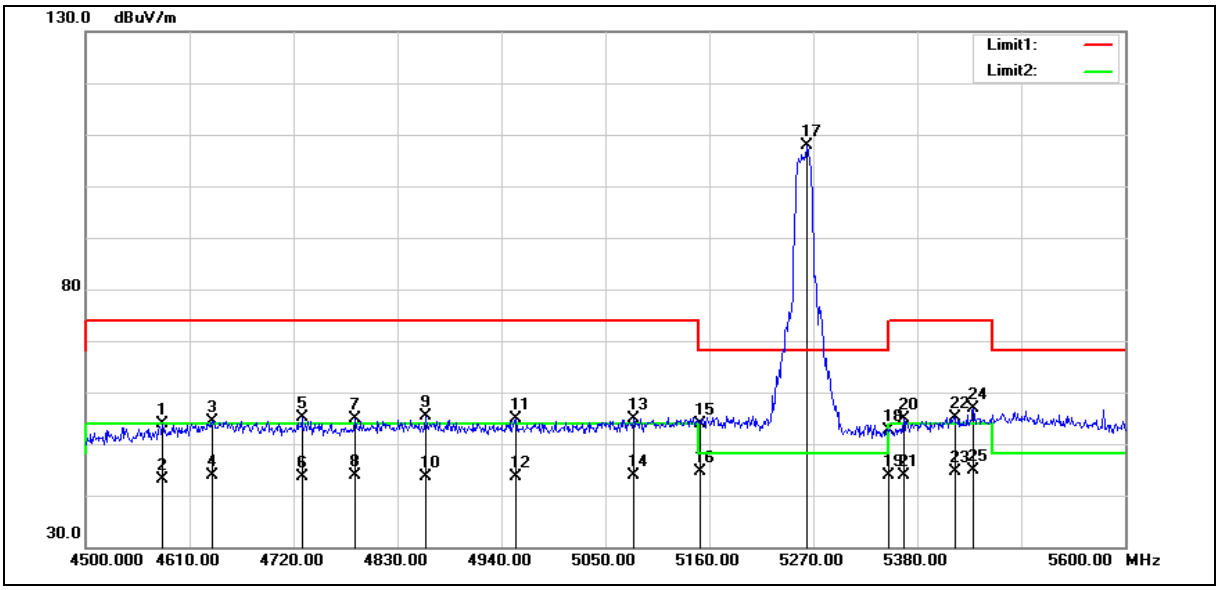

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5260 MHz		
Mode:	Mode 10		
Ant.Polar.:	Vertical		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4581.400	50.21	3.69	53.90	74.00	-20.10	peak
2	4581.400	39.37	3.69	43.06	54.00	-10.94	AVG
3	4634.200	50.64	3.81	54.45	74.00	-19.55	peak
4	4634.200	40.12	3.81	43.93	54.00	-10.07	AVG
5	4728.800	51.03	4.06	55.09	74.00	-18.91	peak
6	4728.800	39.46	4.06	43.52	54.00	-10.48	AVG
7	4784.900	50.63	4.21	54.84	74.00	-19.16	peak
8	4784.900	39.73	4.21	43.94	54.00	-10.06	AVG
9	4859.700	51.09	4.40	55.49	74.00	-18.51	peak
10	4859.700	39.12	4.40	43.52	54.00	-10.48	AVG
11	4955.400	50.20	4.64	54.84	74.00	-19.16	peak
12	4955.400	39.10	4.64	43.74	54.00	-10.26	AVG
13	5079.700	50.02	4.94	54.96	74.00	-19.04	peak
14	5079.700	38.93	4.94	43.87	54.00	-10.13	AVG
15	5150.000	48.66	5.12	53.78	74.00	-20.22	peak
16	5150.000	39.45	5.12	44.57	54.00	-9.43	AVG
17	5263.400	102.55	5.39	107.94	--	--	peak
18	5350.000	47.03	5.61	52.64	74.00	-21.36	peak
19	5350.000	38.35	5.61	43.96	54.00	-10.04	AVG
20	5365.700	49.24	5.65	54.89	74.00	-19.11	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5260 MHz		
Mode:	Mode 10		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
21	5365.700	38.17	5.65	43.82	54.00	-10.18	AVG
22	5419.600	49.44	5.79	55.23	74.00	-18.77	peak
23	5419.600	38.81	5.79	44.60	54.00	-9.40	AVG
24	5439.400	51.00	5.82	56.82	74.00	-17.18	peak
25	5439.400	38.98	5.82	44.80	54.00	-9.20	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5280 MHz		
Mode:	Mode 10		
Ant.Polar.:	Horizontal		

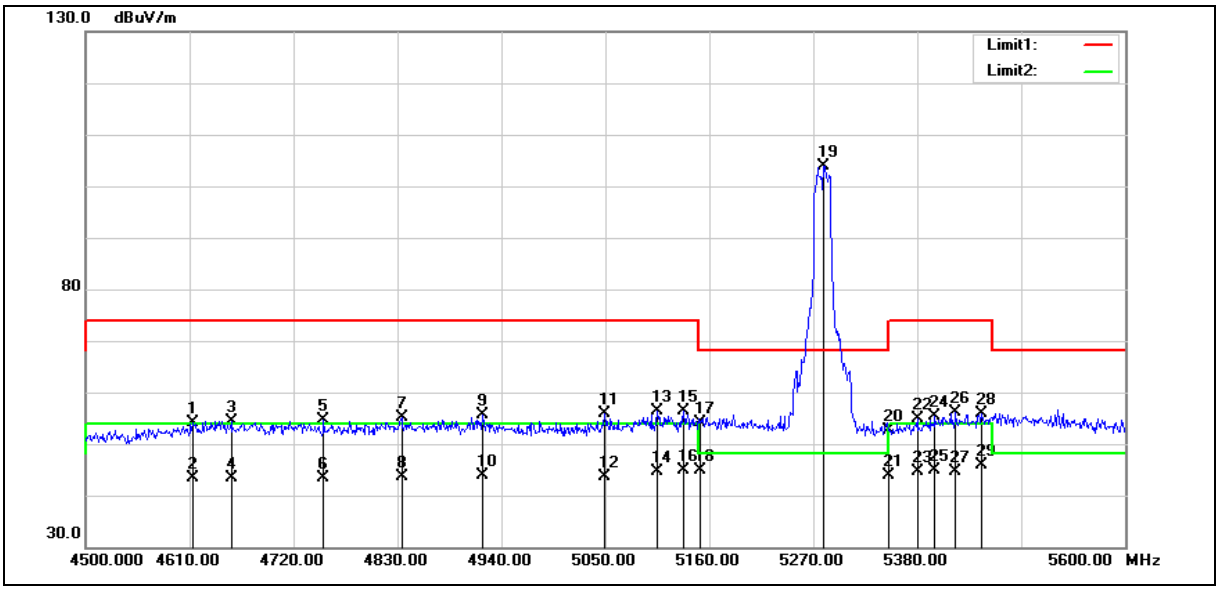

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5280 MHz		
Mode:	Mode 10		
Ant.Polar.:	Horizontal		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4613.300	50.33	3.77	54.10	74.00	-19.90	peak
2	4613.300	39.71	3.77	43.48	54.00	-10.52	AVG
3	4654.000	50.60	3.88	54.48	74.00	-19.52	peak
4	4654.000	39.41	3.88	43.29	54.00	-10.71	AVG
5	4751.900	50.54	4.12	54.66	74.00	-19.34	peak
6	4751.900	39.34	4.12	43.46	54.00	-10.54	AVG
7	4834.400	50.83	4.33	55.16	74.00	-18.84	peak
8	4834.400	39.22	4.33	43.55	54.00	-10.45	AVG
9	4920.200	51.21	4.54	55.75	74.00	-18.25	peak
10	4920.200	39.41	4.54	43.95	54.00	-10.05	AVG
11	5048.900	51.07	4.87	55.94	74.00	-18.06	peak
12	5048.900	38.86	4.87	43.73	54.00	-10.27	AVG
13	5105.000	51.27	5.00	56.27	74.00	-17.73	peak
14	5105.000	39.64	5.00	44.64	54.00	-9.36	AVG
15	5132.500	51.35	5.08	56.43	74.00	-17.57	peak
16	5132.500	39.77	5.08	44.85	54.00	-9.15	AVG
17	5150.000	49.00	5.12	54.12	74.00	-19.88	peak
18	5150.000	39.72	5.12	44.84	54.00	-9.16	AVG
19	5281.000	98.51	5.44	103.95	--	--	peak
20	5350.000	47.01	5.61	52.62	74.00	-21.38	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5280 MHz		
Mode:	Mode 10		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
21	5350.000	38.38	5.61	43.99	54.00	-10.01	AVG
22	5380.000	49.30	5.67	54.97	74.00	-19.03	peak
23	5380.000	38.96	5.67	44.63	54.00	-9.37	AVG
24	5398.700	49.64	5.73	55.37	74.00	-18.63	peak
25	5398.700	39.11	5.73	44.84	54.00	-9.16	AVG
26	5420.700	50.25	5.79	56.04	74.00	-17.96	peak
27	5420.700	38.86	5.79	44.65	54.00	-9.35	AVG
28	5448.200	50.13	5.85	55.98	74.00	-18.02	peak
29	5448.200	40.08	5.85	45.93	54.00	-8.07	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5280 MHz		
Mode:	Mode 10		
Ant.Polar.:	Vertical		

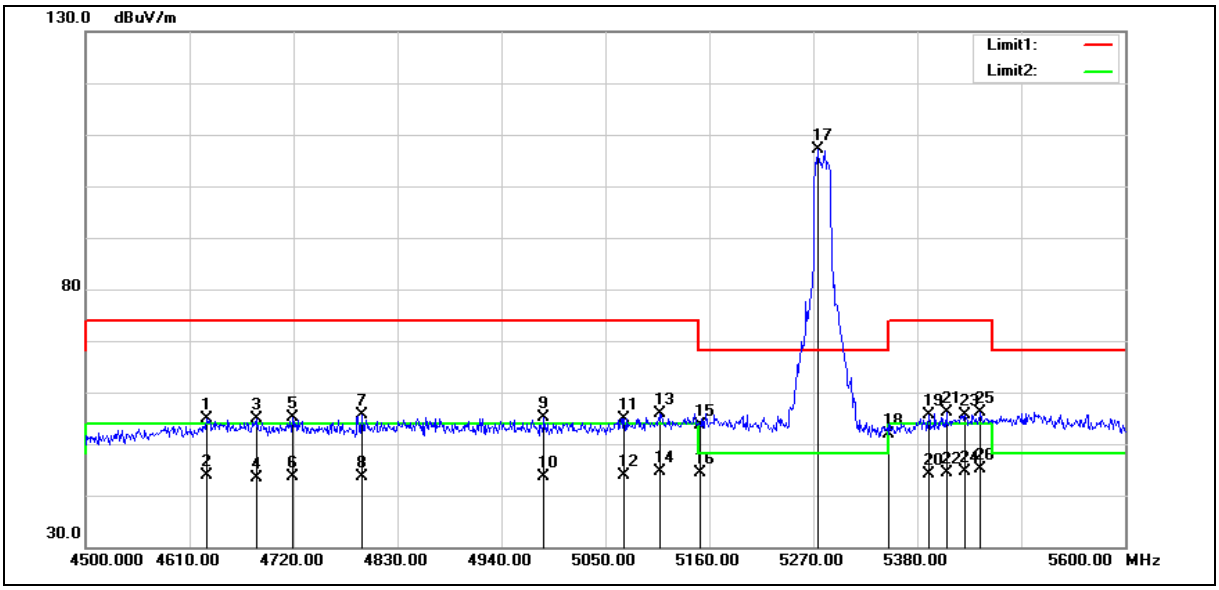

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5280 MHz		
Mode:	Mode 10		
Ant.Polar.:	Vertical		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4627.600	51.16	3.80	54.96	74.00	-19.04	peak
2	4627.600	39.97	3.80	43.77	54.00	-10.23	AVG
3	4681.500	50.99	3.94	54.93	74.00	-19.07	peak
4	4681.500	39.49	3.94	43.43	54.00	-10.57	AVG
5	4718.900	51.09	4.03	55.12	74.00	-18.88	peak
6	4718.900	39.59	4.03	43.62	54.00	-10.38	AVG
7	4792.600	51.41	4.22	55.63	74.00	-18.37	peak
8	4792.600	39.48	4.22	43.70	54.00	-10.30	AVG
9	4985.100	50.45	4.72	55.17	74.00	-18.83	peak
10	4985.100	38.86	4.72	43.58	54.00	-10.42	AVG
11	5069.800	50.03	4.93	54.96	74.00	-19.04	peak
12	5069.800	39.02	4.93	43.95	54.00	-10.05	AVG
13	5108.300	50.83	5.01	55.84	74.00	-18.16	peak
14	5108.300	39.51	5.01	44.52	54.00	-9.48	AVG
15	5150.000	48.50	5.12	53.62	74.00	-20.38	peak
16	5150.000	39.32	5.12	44.44	54.00	-9.56	AVG
17	5274.400	101.71	5.42	107.13	--	--	peak
18	5350.000	46.22	5.61	51.83	74.00	-22.17	peak
19	5392.100	49.81	5.71	55.52	74.00	-18.48	peak
20	5392.100	38.50	5.71	44.21	54.00	-9.79	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5280 MHz		
Mode:	Mode 10		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
21	5410.800	50.36	5.76	56.12	74.00	-17.88	peak
22	5410.800	38.69	5.76	44.45	54.00	-9.55	AVG
23	5430.600	49.77	5.81	55.58	74.00	-18.42	peak
24	5430.600	38.92	5.81	44.73	54.00	-9.27	AVG
25	5447.100	50.32	5.84	56.16	74.00	-17.84	peak
26	5447.100	39.37	5.84	45.21	54.00	-8.79	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5320 MHz		
Mode:	Mode 10		
Ant.Polar.:	Horizontal		

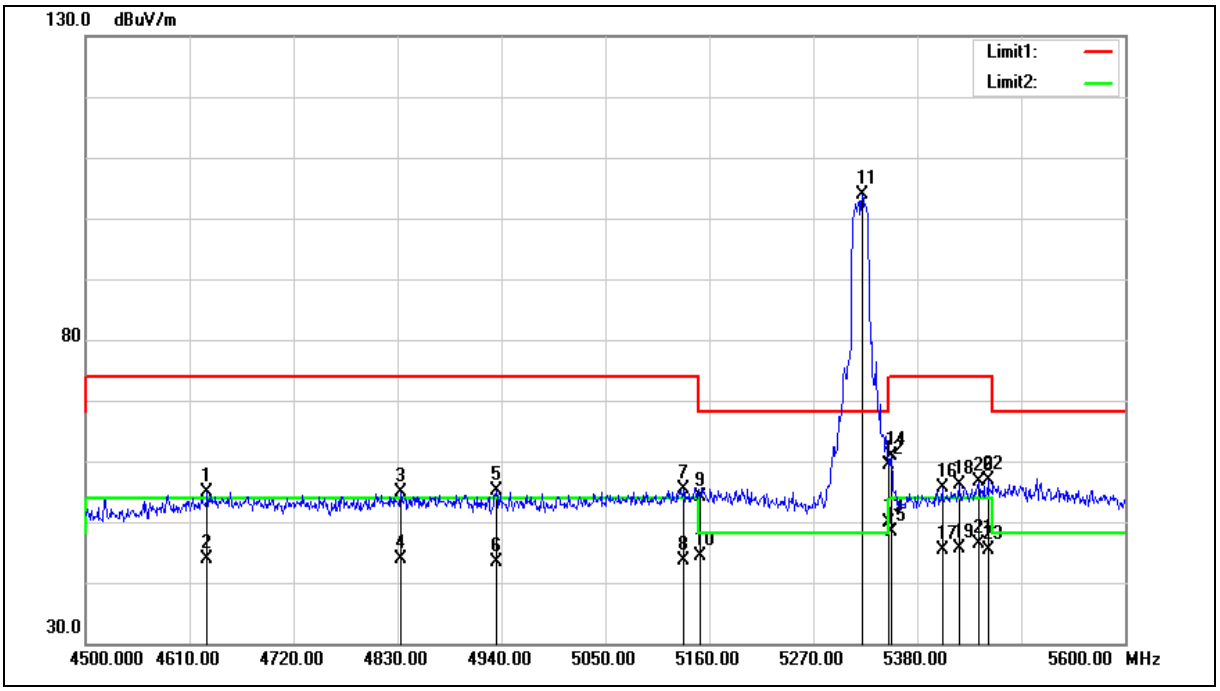

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5320 MHz		
Mode:	Mode 10		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4628.700	51.10	3.81	54.91	74.00	-19.09	peak
2	4628.700	39.97	3.81	43.78	54.00	-10.22	AVG
3	4833.300	50.52	4.32	54.84	74.00	-19.16	peak
4	4833.300	39.51	4.32	43.83	54.00	-10.17	AVG
5	4934.500	50.48	4.58	55.06	74.00	-18.94	peak
6	4934.500	38.85	4.58	43.43	54.00	-10.57	AVG
7	5132.500	50.38	5.08	55.46	74.00	-18.54	peak
8	5132.500	38.46	5.08	43.54	54.00	-10.46	AVG
9	5150.000	48.90	5.12	54.02	74.00	-19.98	peak
10	5150.000	39.35	5.12	44.47	54.00	-9.53	AVG
11	5321.700	98.31	5.54	103.85	--	--	peak
12	5350.000	53.84	5.61	59.45	74.00	-14.55	peak
13	5350.000	44.33	5.61	49.94	54.00	-4.06	AVG
14	5352.500	55.36	5.61	60.97	74.00	-13.03	peak
15	5352.500	42.80	5.61	48.41	54.00	-5.59	AVG
16	5406.400	49.87	5.75	55.62	74.00	-18.38	peak
17	5406.400	39.64	5.75	45.39	54.00	-8.61	AVG
18	5425.100	50.43	5.80	56.23	74.00	-17.77	peak
19	5425.100	39.90	5.80	45.70	54.00	-8.30	AVG
20	5444.900	50.73	5.84	56.57	74.00	-17.43	peak
21	5444.900	40.44	5.84	46.28	54.00	-7.72	AVG
22	5454.800	51.04	5.86	56.90	74.00	-17.10	peak
23	5454.800	39.55	5.86	45.41	54.00	-8.59	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5320 MHz		
Mode:	Mode 10		
Ant.Polar.:	Vertical		

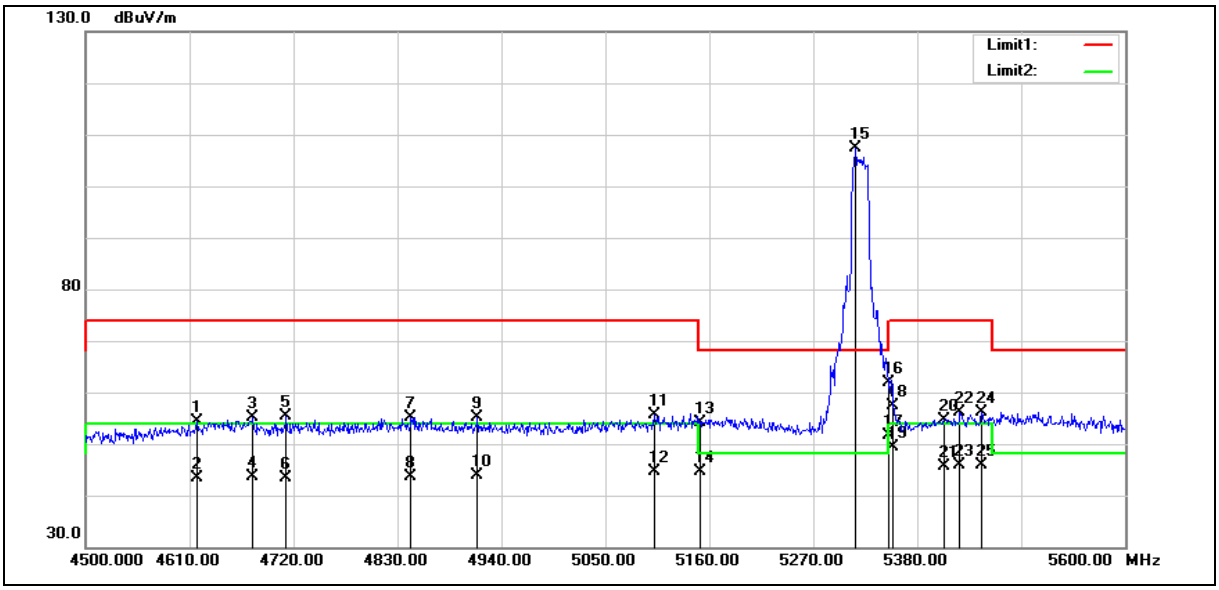

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5320 MHz		
Mode:	Mode 10		
Ant.Polar.:	Vertical		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4617.700	50.53	3.78	54.31	74.00	-19.69	peak
2	4617.700	39.54	3.78	43.32	54.00	-10.68	AVG
3	4677.100	51.28	3.92	55.20	74.00	-18.80	peak
4	4677.100	39.77	3.92	43.69	54.00	-10.31	AVG
5	4712.300	51.26	4.02	55.28	74.00	-18.72	peak
6	4712.300	39.41	4.02	43.43	54.00	-10.57	AVG
7	4844.300	50.79	4.35	55.14	74.00	-18.86	peak
8	4844.300	39.40	4.35	43.75	54.00	-10.25	AVG
9	4914.700	50.69	4.53	55.22	74.00	-18.78	peak
10	4914.700	39.35	4.53	43.88	54.00	-10.12	AVG
11	5101.700	50.69	4.99	55.68	74.00	-18.32	peak
12	5101.700	39.52	4.99	44.51	54.00	-9.49	AVG
13	5150.000	48.90	5.12	54.02	74.00	-19.98	peak
14	5150.000	39.47	5.12	44.59	54.00	-9.41	AVG
15	5315.100	101.80	5.52	107.32	--	--	peak
16	5350.000	56.20	5.61	61.81	74.00	-12.19	peak
17	5350.000	46.02	5.61	51.63	54.00	-2.37	AVG
18	5354.700	51.87	5.62	57.49	74.00	-16.51	peak
19	5354.700	43.67	5.62	49.29	54.00	-4.71	AVG
20	5408.600	48.90	5.76	54.66	74.00	-19.34	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5320 MHz		
Mode:	Mode 10		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
21	5408.600	39.77	5.76	45.53	54.00	-8.47	AVG
22	5425.100	50.42	5.80	56.22	74.00	-17.78	peak
23	5425.100	40.02	5.80	45.82	54.00	-8.18	AVG
24	5448.200	50.31	5.85	56.16	74.00	-17.84	peak
25	5448.200	40.08	5.85	45.93	54.00	-8.07	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5500 MHz		
Mode:	Mode 10		
Ant.Polar.:	Horizontal		

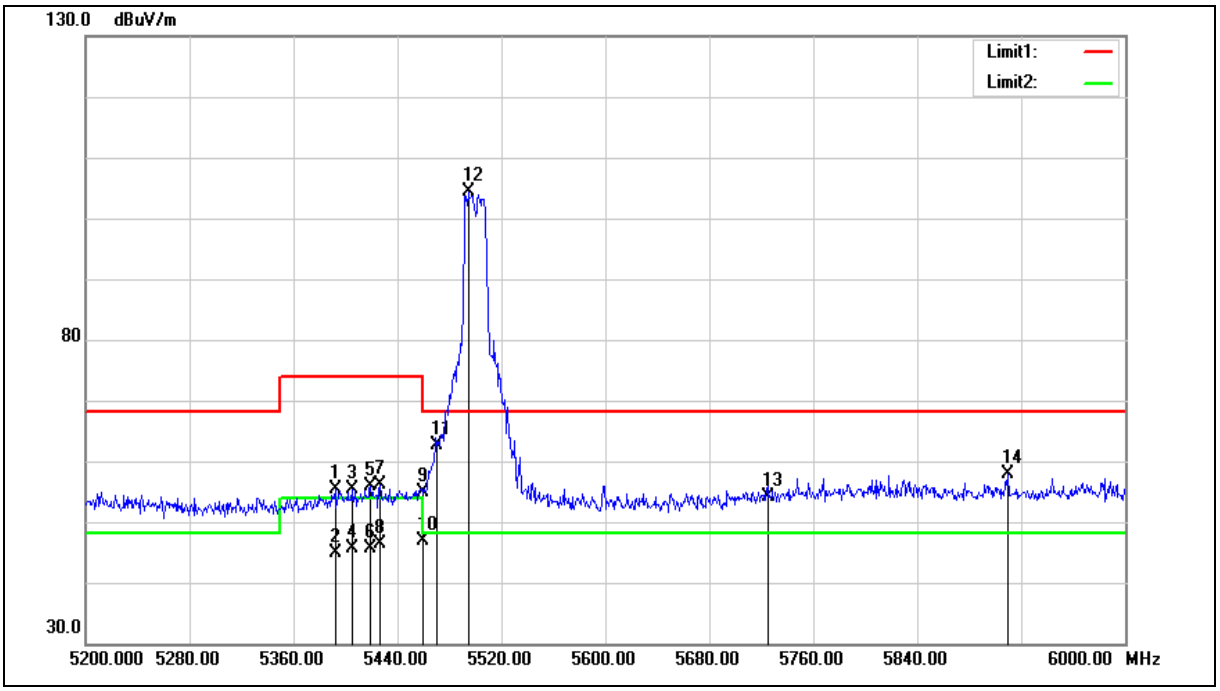

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5500 MHz		
Mode:	Mode 10		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5392.000	49.62	5.71	55.33	74.00	-18.67	peak
2	5392.000	39.26	5.71	44.97	54.00	-9.03	AVG
3	5404.800	49.72	5.74	55.46	74.00	-18.54	peak
4	5404.800	39.90	5.74	45.64	54.00	-8.36	AVG
5	5419.200	50.02	5.78	55.80	74.00	-18.20	peak
6	5419.200	39.97	5.78	45.75	54.00	-8.25	AVG
7	5426.400	50.30	5.80	56.10	74.00	-17.90	peak
8	5426.400	40.62	5.80	46.42	54.00	-7.58	AVG
9	5460.000	48.97	5.88	54.85	74.00	-19.15	peak
10	5460.000	40.96	5.88	46.84	54.00	-7.16	AVG
11	5470.000	56.65	5.91	62.56	68.20	-5.64	peak
12	5494.400	98.36	5.97	104.33	--	--	peak
13	5725.000	47.74	6.47	54.21	68.20	-13.99	peak
14	5909.600	51.03	6.88	57.91	68.20	-10.29	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5500 MHz		
Mode:	Mode 10		
Ant.Polar.:	Vertical		

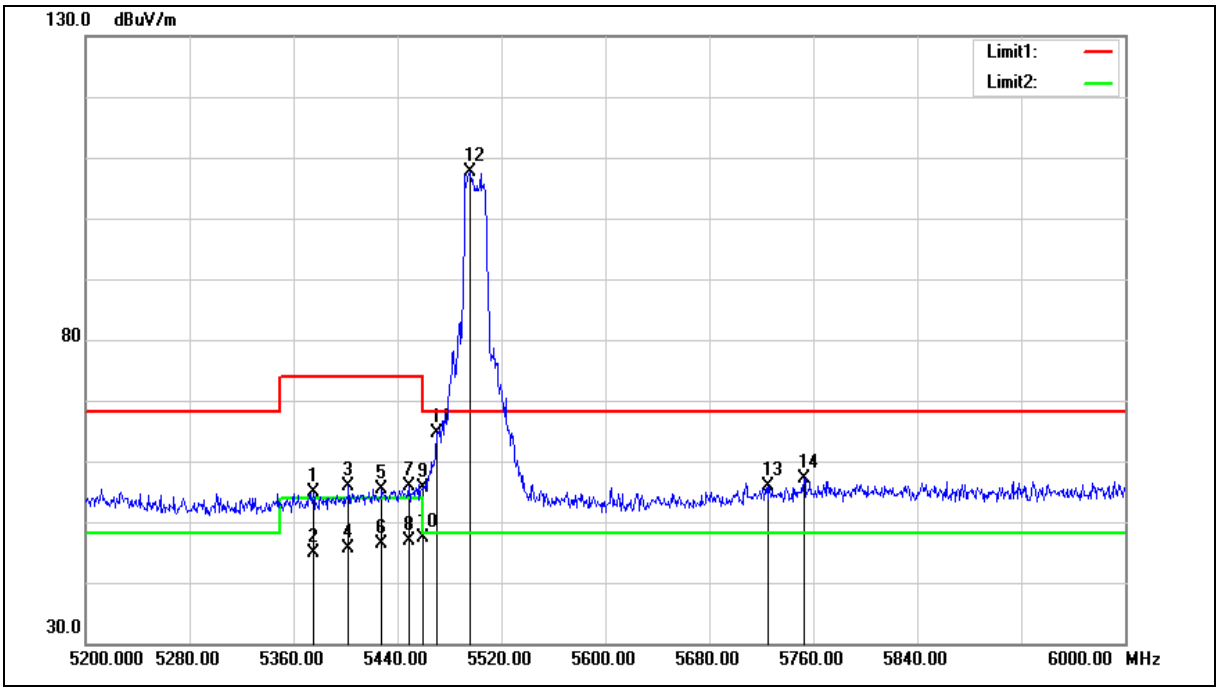

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5500 MHz		
Mode:	Mode 10		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5375.200	49.11	5.67	54.78	74.00	-19.22	peak
2	5375.200	39.28	5.67	44.95	54.00	-9.05	AVG
3	5402.400	50.14	5.73	55.87	74.00	-18.13	peak
4	5402.400	39.81	5.73	45.54	54.00	-8.46	AVG
5	5428.000	49.47	5.80	55.27	74.00	-18.73	peak
6	5428.000	40.50	5.80	46.30	54.00	-7.70	AVG
7	5448.800	49.91	5.85	55.76	74.00	-18.24	peak
8	5448.800	41.07	5.85	46.92	54.00	-7.08	AVG
9	5460.000	49.78	5.88	55.66	74.00	-18.34	peak
10	5460.000	41.50	5.88	47.38	54.00	-6.62	AVG
11	5470.000	58.60	5.91	64.51	68.20	-3.69	peak
12	5496.000	101.54	5.97	107.51	--	--	peak
13	5725.000	49.33	6.47	55.80	68.20	-12.40	peak
14	5752.800	50.57	6.54	57.11	68.20	-11.09	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5560 MHz		
Mode:	Mode 10		
Ant.Polar.:	Horizontal		

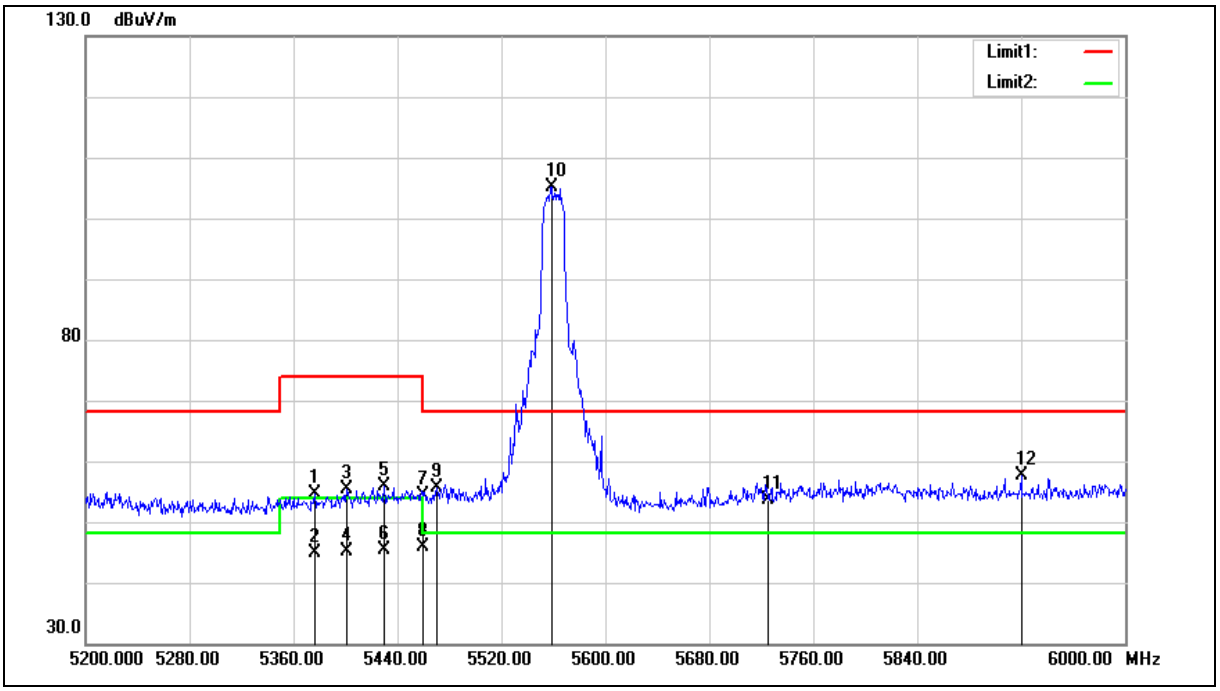

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5560 MHz		
Mode:	Mode 10		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5376.000	49.00	5.67	54.67	74.00	-19.33	peak
2	5376.000	39.10	5.67	44.77	54.00	-9.23	AVG
3	5400.800	49.65	5.73	55.38	74.00	-18.62	peak
4	5400.800	39.31	5.73	45.04	54.00	-8.96	AVG
5	5429.600	50.03	5.80	55.83	74.00	-18.17	peak
6	5429.600	39.48	5.80	45.28	54.00	-8.72	AVG
7	5460.000	48.56	5.88	54.44	74.00	-19.56	peak
8	5460.000	39.98	5.88	45.86	54.00	-8.14	AVG
9	5470.000	49.60	5.91	55.51	68.20	-12.69	peak
10	5558.400	99.01	6.11	105.12	--	--	peak
11	5725.000	47.28	6.47	53.75	68.20	-14.45	peak
12	5920.000	50.67	6.91	57.58	68.20	-10.62	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5560 MHz		
Mode:	Mode 10		
Ant.Polar.:	Vertical		

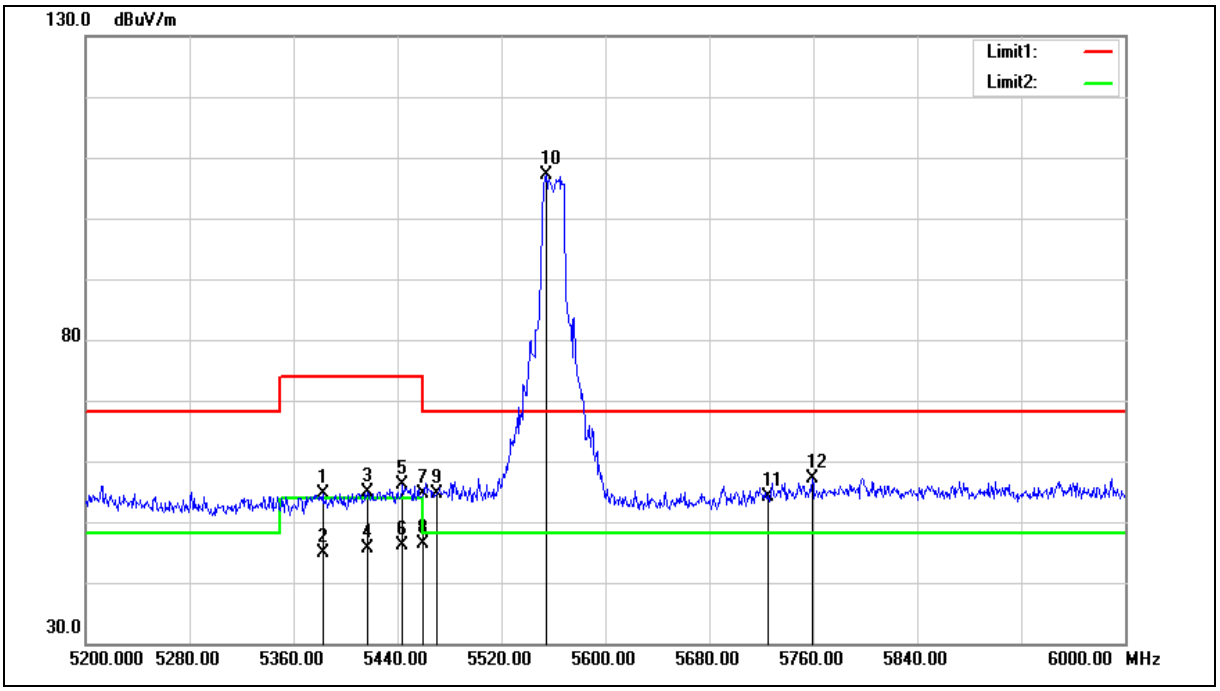

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5560 MHz		
Mode:	Mode 10		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5382.400	48.92	5.69	54.61	74.00	-19.39	peak
2	5382.400	39.27	5.69	44.96	54.00	-9.04	AVG
3	5416.800	49.05	5.77	54.82	74.00	-19.18	peak
4	5416.800	39.90	5.77	45.67	54.00	-8.33	AVG
5	5444.000	50.17	5.84	56.01	74.00	-17.99	peak
6	5444.000	40.17	5.84	46.01	54.00	-7.99	AVG
7	5460.000	48.85	5.88	54.73	74.00	-19.27	peak
8	5460.000	40.50	5.88	46.38	54.00	-7.62	AVG
9	5470.000	48.83	5.91	54.74	68.20	-13.46	peak
10	5554.400	100.96	6.10	107.06	--	--	peak
11	5725.000	47.60	6.47	54.07	68.20	-14.13	peak
12	5759.200	50.50	6.55	57.05	68.20	-11.15	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5700 MHz		
Mode:	Mode 10		
Ant.Polar.:	Horizontal		

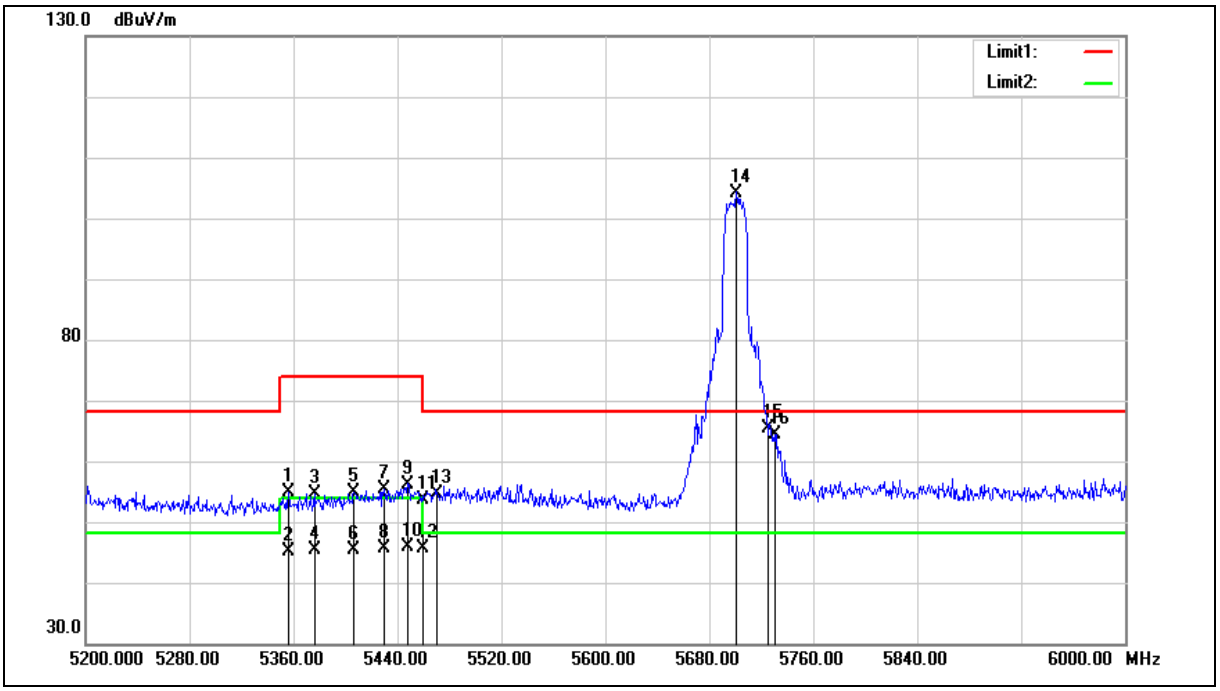

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5700 MHz		
Mode:	Mode 10		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5356.000	49.22	5.62	54.84	74.00	-19.16	peak
2	5356.000	39.43	5.62	45.05	54.00	-8.95	AVG
3	5376.000	49.03	5.67	54.70	74.00	-19.30	peak
4	5376.000	39.75	5.67	45.42	54.00	-8.58	AVG
5	5406.400	49.16	5.75	54.91	74.00	-19.09	peak
6	5406.400	39.64	5.75	45.39	54.00	-8.61	AVG
7	5429.600	49.48	5.80	55.28	74.00	-18.72	peak
8	5429.600	39.71	5.80	45.51	54.00	-8.49	AVG
9	5448.000	50.40	5.85	56.25	74.00	-17.75	peak
10	5448.000	39.97	5.85	45.82	54.00	-8.18	AVG
11	5460.000	47.80	5.88	53.68	74.00	-20.32	peak
12	5460.000	39.66	5.88	45.54	54.00	-8.46	AVG
13	5470.000	48.72	5.91	54.63	68.20	-13.57	peak
14	5700.800	97.83	6.42	104.25	--	--	peak
15	5725.000	59.02	6.47	65.49	68.20	-2.71	peak
16	5730.400	58.00	6.49	64.49	68.20	-3.71	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5700 MHz		
Mode:	Mode 10		
Ant.Polar.:	Vertical		

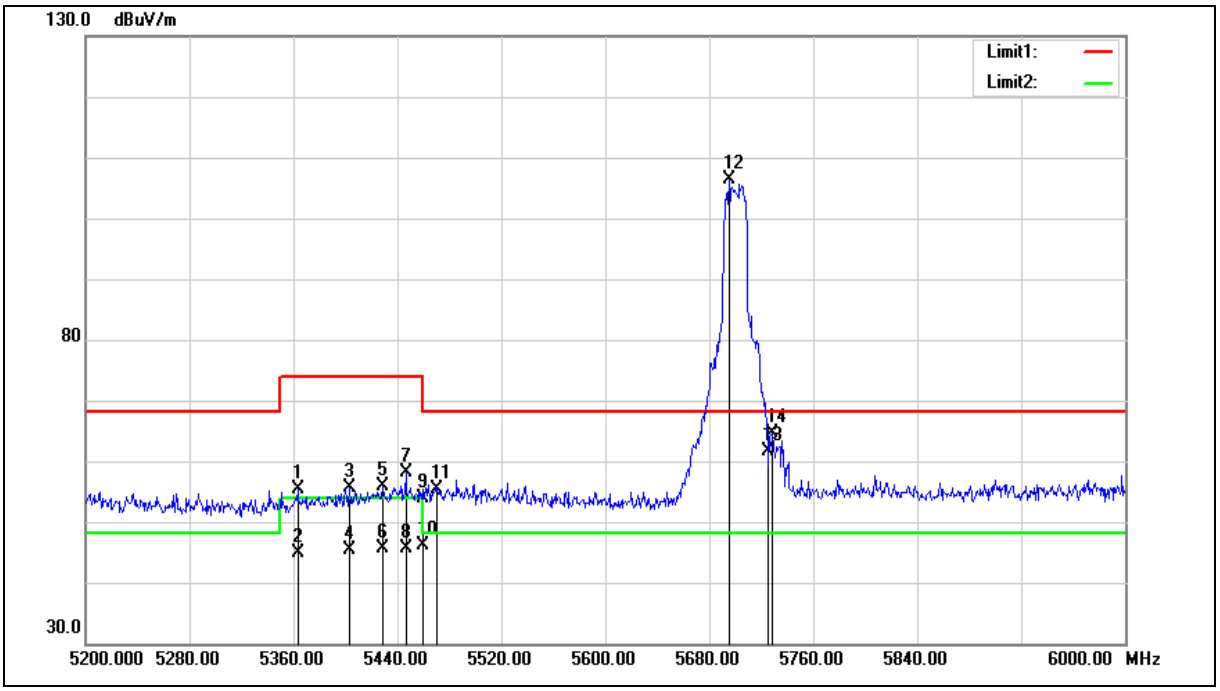

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5700 MHz		
Mode:	Mode 10		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5363.200	49.79	5.64	55.43	74.00	-18.57	peak
2	5363.200	39.33	5.64	44.97	54.00	-9.03	AVG
3	5403.200	49.79	5.74	55.53	74.00	-18.47	peak
4	5403.200	39.53	5.74	45.27	54.00	-8.73	AVG
5	5428.800	49.97	5.80	55.77	74.00	-18.23	peak
6	5428.800	39.83	5.80	45.63	54.00	-8.37	AVG
7	5446.400	52.24	5.84	58.08	74.00	-15.92	peak
8	5446.400	39.68	5.84	45.52	54.00	-8.48	AVG
9	5460.000	48.12	5.88	54.00	74.00	-20.00	peak
10	5460.000	40.21	5.88	46.09	54.00	-7.91	AVG
11	5470.000	49.50	5.91	55.41	68.20	-12.79	peak
12	5695.200	100.06	6.41	106.47	--	--	peak
13	5725.000	55.18	6.47	61.65	68.20	-6.55	peak
14	5728.800	58.25	6.48	64.73	68.20	-3.47	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5745 MHz		
Mode:	Mode 10		
Ant.Polar.:	Horizontal		

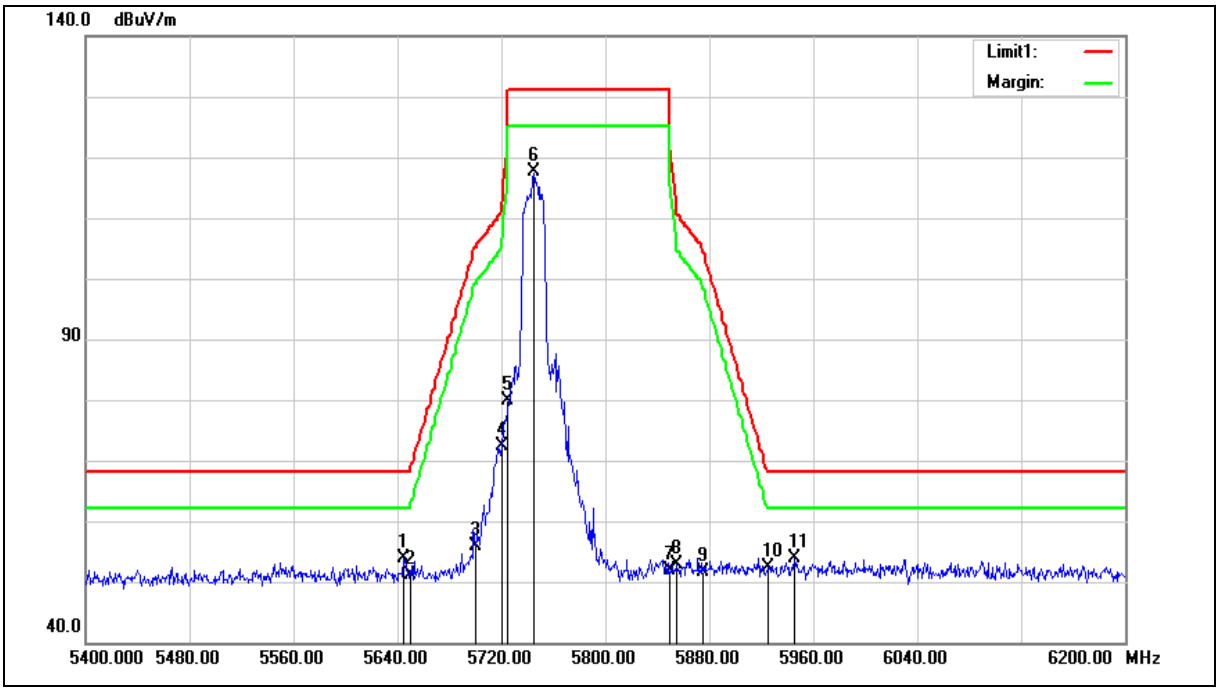

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5745 MHz		
Mode:	Mode 10		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5644.800	53.20	0.60	53.80	68.20	-14.40	peak
2	5650.000	50.48	0.62	51.10	68.20	-17.10	peak
3	5700.000	55.01	0.75	55.76	105.20	-49.44	peak
4	5720.000	71.49	0.81	72.30	110.80	-38.50	peak
5	5725.000	79.18	0.82	80.00	122.20	-42.20	peak
6	5744.800	116.70	0.87	117.57	--	--	peak
7	5850.000	50.65	1.17	51.82	122.20	-70.38	peak
8	5855.000	51.63	1.18	52.81	110.80	-57.99	peak
9	5875.000	50.52	1.23	51.75	105.20	-53.45	peak
10	5925.000	51.02	1.37	52.39	68.20	-15.81	peak
11	5945.600	52.57	1.42	53.99	68.20	-14.21	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5745 MHz		
Mode:	Mode 10		
Ant.Polar.:	Vertical		

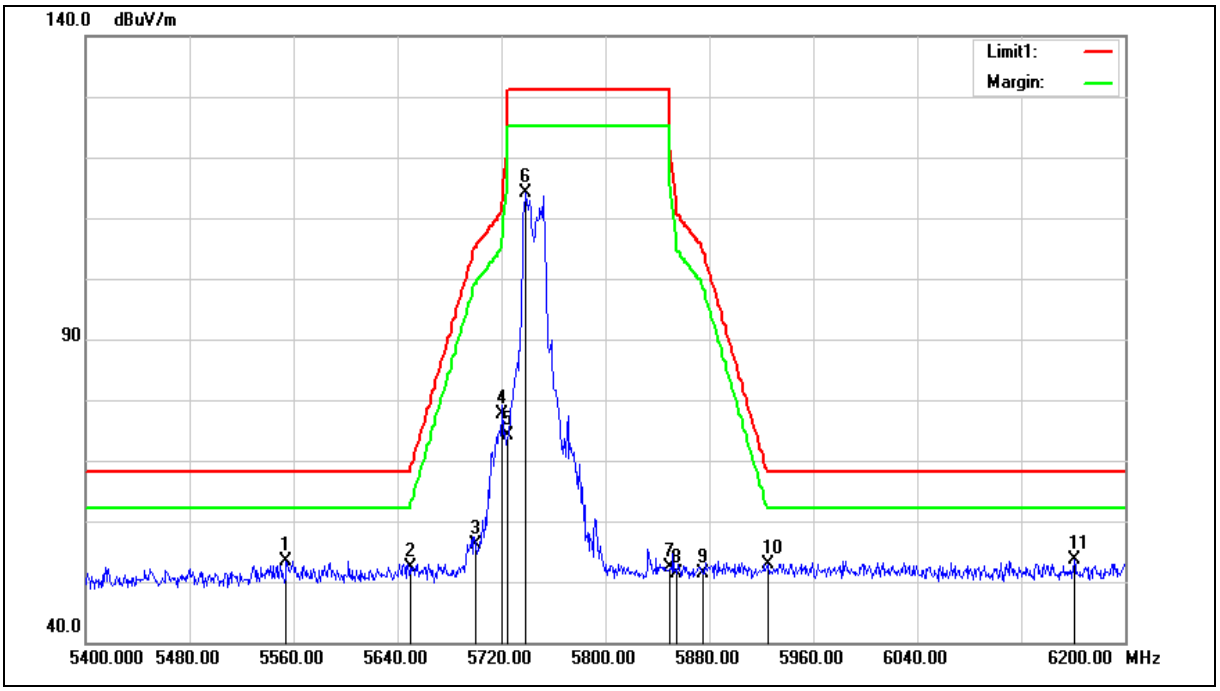

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5745 MHz		
Mode:	Mode 10		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5554.400	53.07	0.36	53.43	68.20	-14.77	peak
2	5650.000	51.67	0.62	52.29	68.20	-15.91	peak
3	5700.000	55.45	0.75	56.20	105.20	-49.00	peak
4	5720.000	76.79	0.81	77.60	110.80	-33.20	peak
5	5725.000	73.40	0.82	74.22	122.20	-47.98	peak
6	5738.400	113.18	0.86	114.04	--	--	peak
7	5850.000	51.23	1.17	52.40	122.20	-69.80	peak
8	5855.000	50.18	1.18	51.36	110.80	-59.44	peak
9	5875.000	50.20	1.23	51.43	105.20	-53.77	peak
10	5925.000	51.41	1.37	52.78	68.20	-15.42	peak
11	6160.800	51.58	2.14	53.72	68.20	-14.48	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5785 MHz		
Mode:	Mode 10		
Ant.Polar.:	Horizontal		

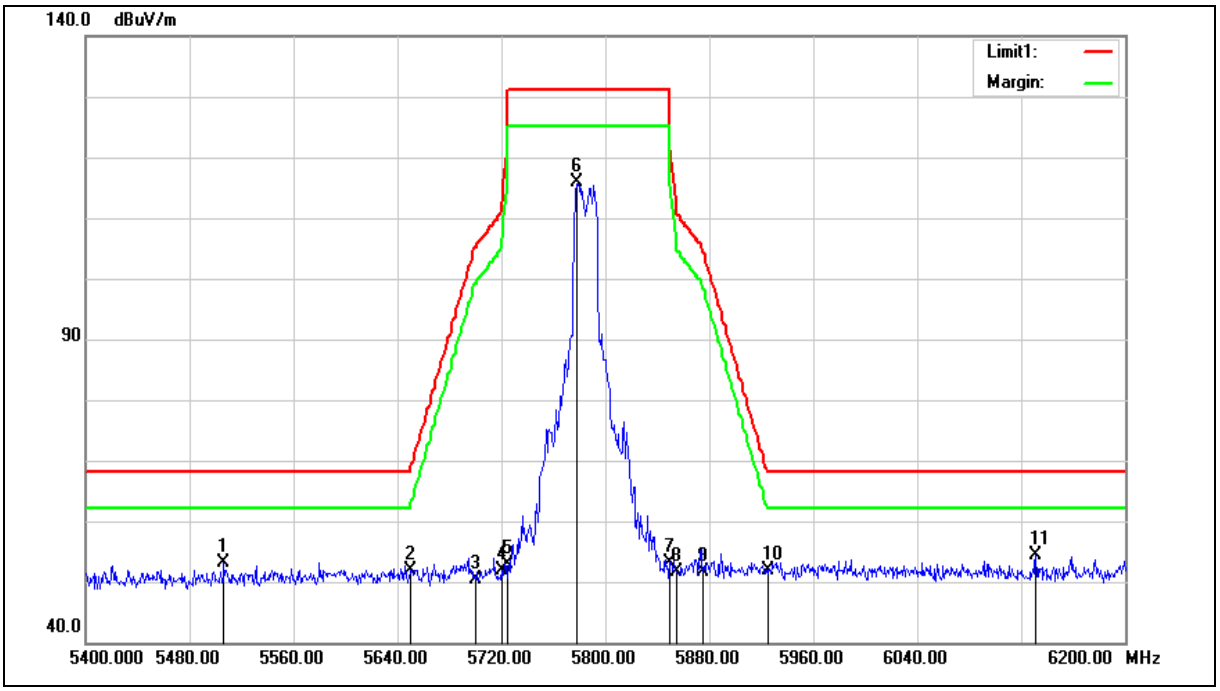

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5785 MHz		
Mode:	Mode 10		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5506.400	52.83	0.23	53.06	68.20	-15.14	peak
2	5650.000	51.30	0.62	51.92	68.20	-16.28	peak
3	5700.000	49.71	0.75	50.46	105.20	-54.74	peak
4	5720.000	51.09	0.81	51.90	110.80	-58.90	peak
5	5725.000	51.99	0.82	52.81	122.20	-69.39	peak
6	5778.400	114.94	0.98	115.92	--	--	peak
7	5850.000	51.88	1.17	53.05	122.20	-69.15	peak
8	5855.000	50.41	1.18	51.59	110.80	-59.21	peak
9	5875.000	50.32	1.23	51.55	105.20	-53.65	peak
10	5925.000	50.59	1.37	51.96	68.20	-16.24	peak
11	6131.200	52.28	2.03	54.31	68.20	-13.89	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5785 MHz		
Mode:	Mode 10		
Ant.Polar.:	Vertical		

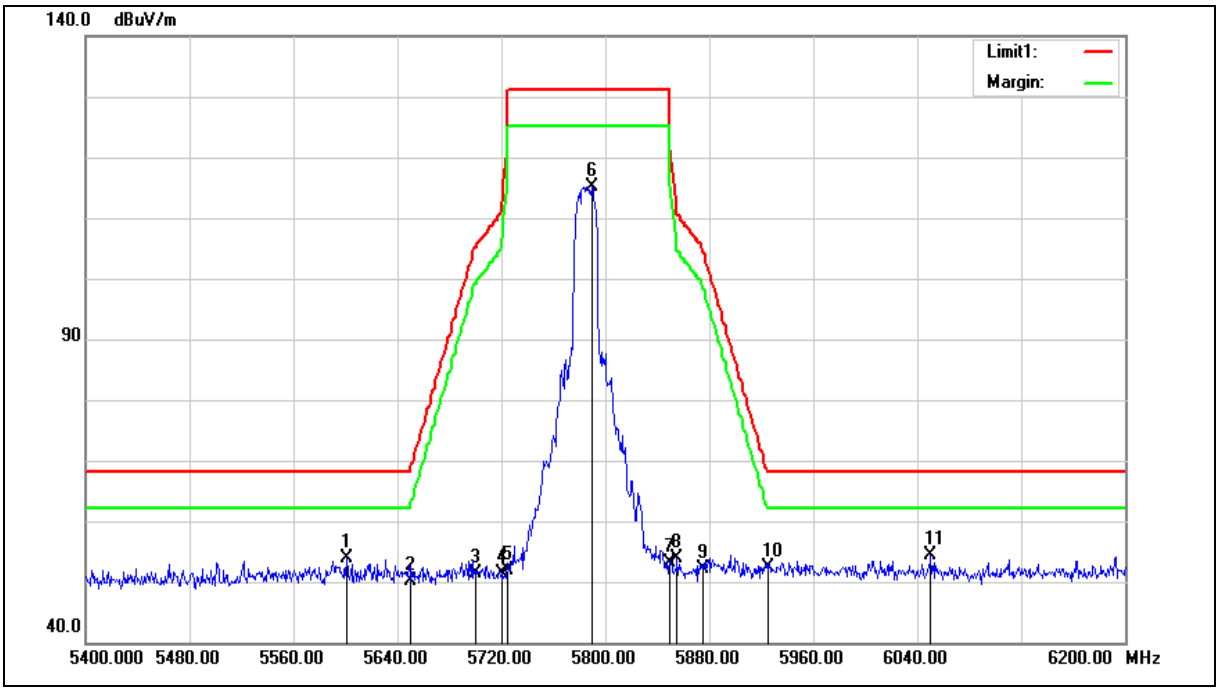

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5785 MHz		
Mode:	Mode 10		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5600.800	53.37	0.48	53.85	68.20	-14.35	peak
2	5650.000	49.47	0.62	50.09	68.20	-18.11	peak
3	5700.000	50.57	0.75	51.32	105.20	-53.88	peak
4	5720.000	50.51	0.81	51.32	110.80	-59.48	peak
5	5725.000	51.08	0.82	51.90	122.20	-70.30	peak
6	5789.600	114.25	0.99	115.24	--	--	peak
7	5850.000	51.95	1.17	53.12	122.20	-69.08	peak
8	5855.000	52.63	1.18	53.81	110.80	-56.99	peak
9	5875.000	50.87	1.23	52.10	105.20	-53.10	peak
10	5925.000	51.12	1.37	52.49	68.20	-15.71	peak
11	6050.400	52.52	1.74	54.26	68.20	-13.94	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5825 MHz		
Mode:	Mode 10		
Ant.Polar.:	Horizontal		

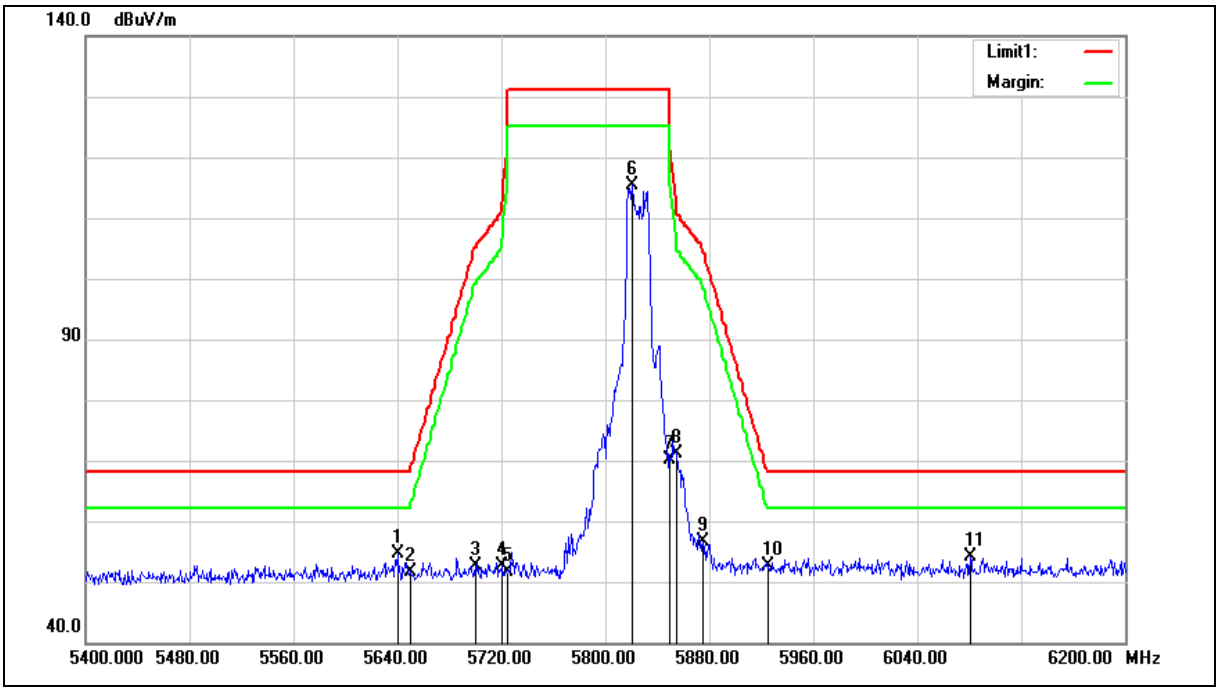

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5825 MHz		
Mode:	Mode 10		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5640.000	53.92	0.59	54.51	68.20	-13.69	peak
2	5650.000	51.10	0.62	51.72	68.20	-16.48	peak
3	5700.000	51.81	0.75	52.56	105.20	-52.64	peak
4	5720.000	51.79	0.81	52.60	110.80	-58.20	peak
5	5725.000	50.75	0.82	51.57	122.20	-70.63	peak
6	5820.800	114.22	1.08	115.30	--	--	peak
7	5850.000	69.01	1.17	70.18	122.20	-52.02	peak
8	5855.000	69.83	1.18	71.01	110.80	-39.79	peak
9	5875.000	55.35	1.23	56.58	105.20	-48.62	peak
10	5925.000	51.19	1.37	52.56	68.20	-15.64	peak
11	6080.800	52.20	1.85	54.05	68.20	-14.15	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5825 MHz		
Mode:	Mode 10		
Ant.Polar.:	Vertical		

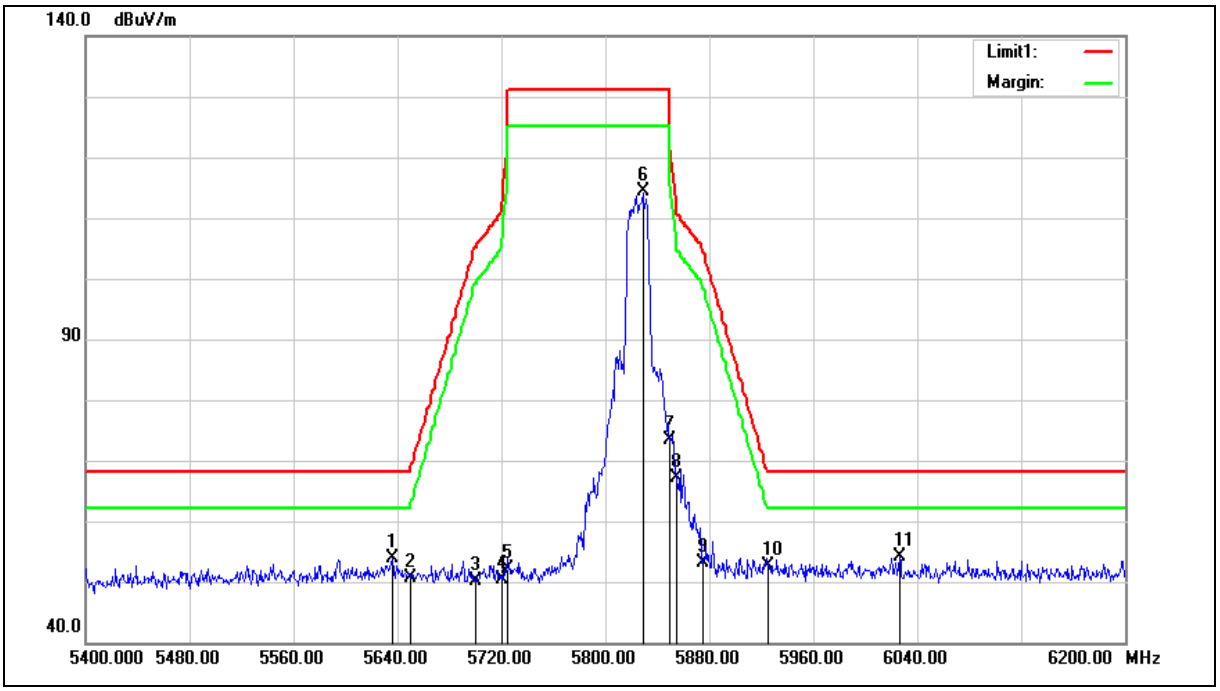

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5825 MHz		
Mode:	Mode 10		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5636.000	53.23	0.59	53.82	68.20	-14.38	peak
2	5650.000	49.90	0.62	50.52	68.20	-17.68	peak
3	5700.000	49.49	0.75	50.24	105.20	-54.96	peak
4	5720.000	49.54	0.81	50.35	110.80	-60.45	peak
5	5725.000	51.19	0.82	52.01	122.20	-70.19	peak
6	5828.800	113.30	1.11	114.41	--	--	peak
7	5850.000	72.33	1.17	73.50	122.20	-48.70	peak
8	5855.000	65.98	1.18	67.16	110.80	-43.64	peak
9	5875.000	51.79	1.23	53.02	105.20	-52.18	peak
10	5925.000	51.27	1.37	52.64	68.20	-15.56	peak
11	6026.400	52.41	1.66	54.07	68.20	-14.13	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5180 MHz		
Mode:	Mode 13		
Ant.Polar.:	Horizontal		

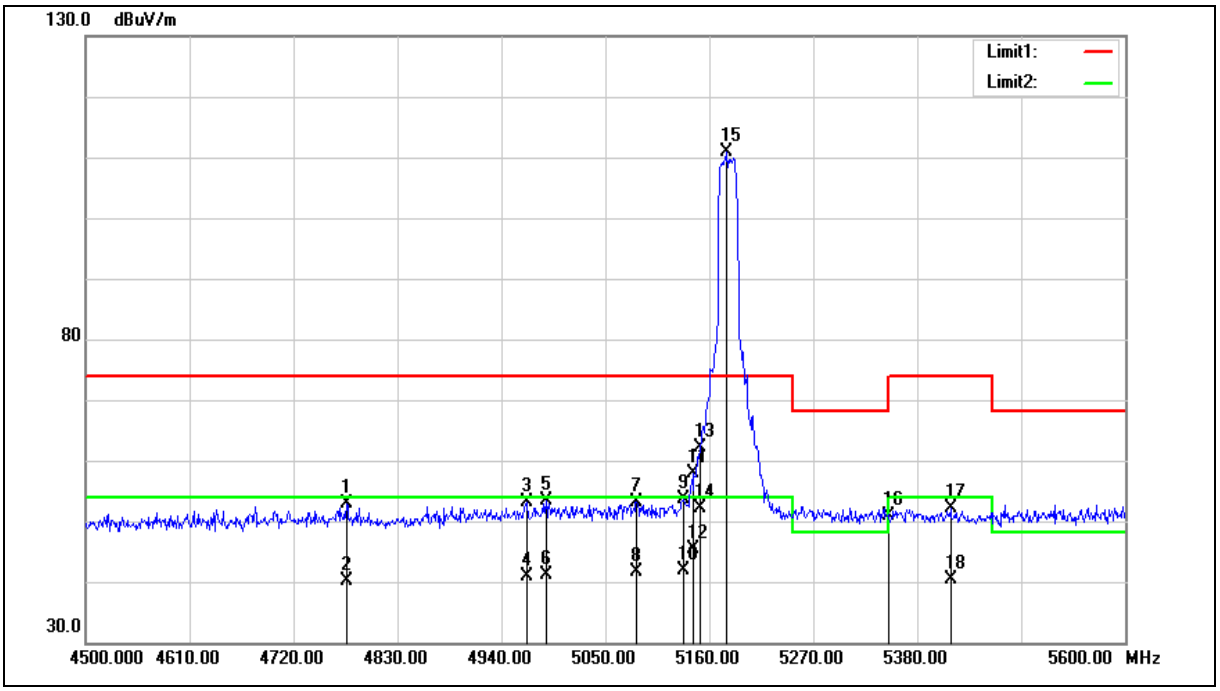

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5180 MHz		
Mode:	Mode 13		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4776.100	54.16	-1.39	52.77	74.00	-21.23	peak
2	4776.100	41.57	-1.39	40.18	54.00	-13.82	AVG
3	4966.400	53.97	-0.87	53.10	74.00	-20.90	peak
4	4966.400	41.65	-0.87	40.78	54.00	-13.22	AVG
5	4987.300	54.29	-0.81	53.48	74.00	-20.52	peak
6	4987.300	41.88	-0.81	41.07	54.00	-12.93	AVG
7	5083.000	53.73	-0.60	53.13	74.00	-20.87	peak
8	5083.000	42.16	-0.60	41.56	54.00	-12.44	AVG
9	5132.500	54.02	-0.51	53.51	74.00	-20.49	peak
10	5132.500	42.49	-0.51	41.98	54.00	-12.02	AVG
11	5143.500	58.29	-0.49	57.80	74.00	-16.20	peak
12	5143.500	45.92	-0.49	45.43	54.00	-8.57	AVG
13	5150.000	62.49	-0.48	62.01	74.00	-11.99	peak
14	5150.000	52.67	-0.48	52.19	54.00	-1.81	AVG
15	5178.700	111.41	-0.42	110.99	--	--	peak
16	5350.000	51.07	-0.08	50.99	74.00	-23.01	peak
17	5415.200	52.20	0.05	52.25	74.00	-21.75	peak
18	5415.200	40.24	0.05	40.29	54.00	-13.71	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5180 MHz		
Mode:	Mode 13		
Ant.Polar.:	Vertical		

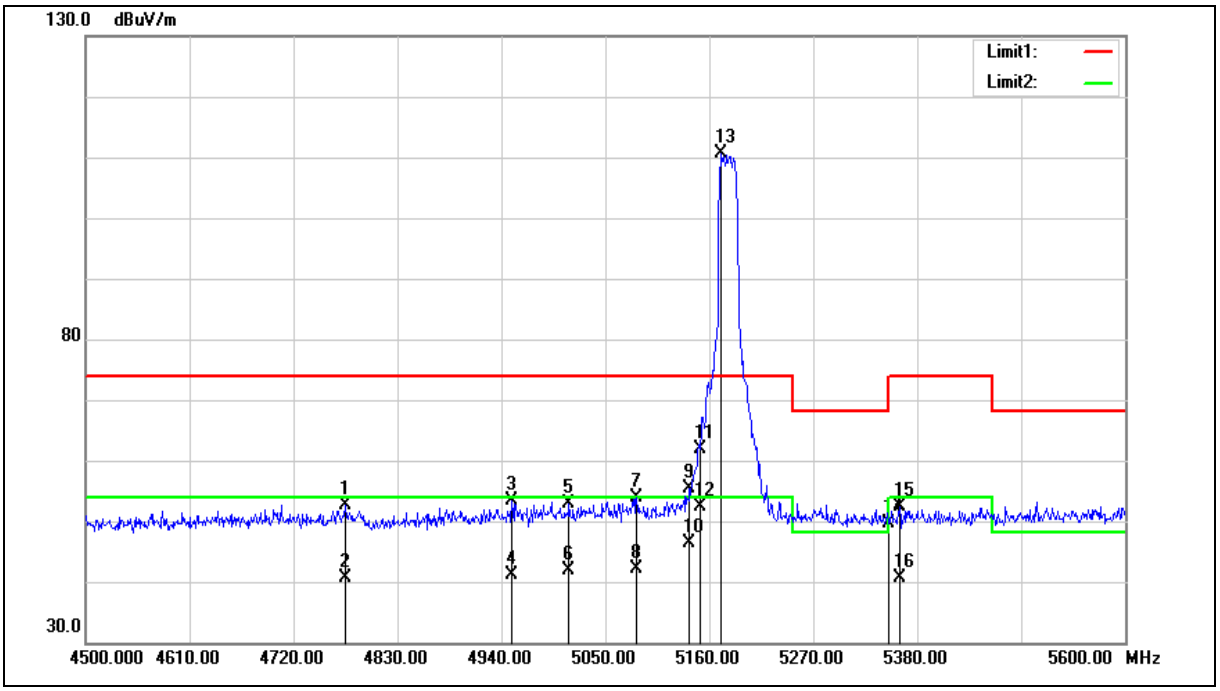

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5180 MHz		
Mode:	Mode 13		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4775.000	54.00	-1.40	52.60	74.00	-21.40	peak
2	4775.000	42.13	-1.40	40.73	54.00	-13.27	AVG
3	4951.000	54.24	-0.90	53.34	74.00	-20.66	peak
4	4951.000	42.10	-0.90	41.20	54.00	-12.80	AVG
5	5011.500	53.56	-0.74	52.82	74.00	-21.18	peak
6	5011.500	42.59	-0.74	41.85	54.00	-12.15	AVG
7	5083.000	54.45	-0.60	53.85	74.00	-20.15	peak
8	5083.000	42.63	-0.60	42.03	54.00	-11.97	AVG
9	5139.100	55.92	-0.49	55.43	74.00	-18.57	peak
10	5139.100	46.86	-0.49	46.37	54.00	-7.63	AVG
11	5150.000	62.48	-0.48	62.00	74.00	-12.00	peak
12	5150.000	52.80	-0.48	52.32	54.00	-1.68	AVG
13	5172.100	110.98	-0.43	110.55	--	--	peak
14	5350.000	49.60	-0.08	49.52	74.00	-24.48	peak
15	5361.300	52.53	-0.06	52.47	74.00	-21.53	peak
16	5361.300	40.58	-0.06	40.52	54.00	-13.48	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5200 MHz		
Mode:	Mode 13		
Ant.Polar.:	Horizontal		

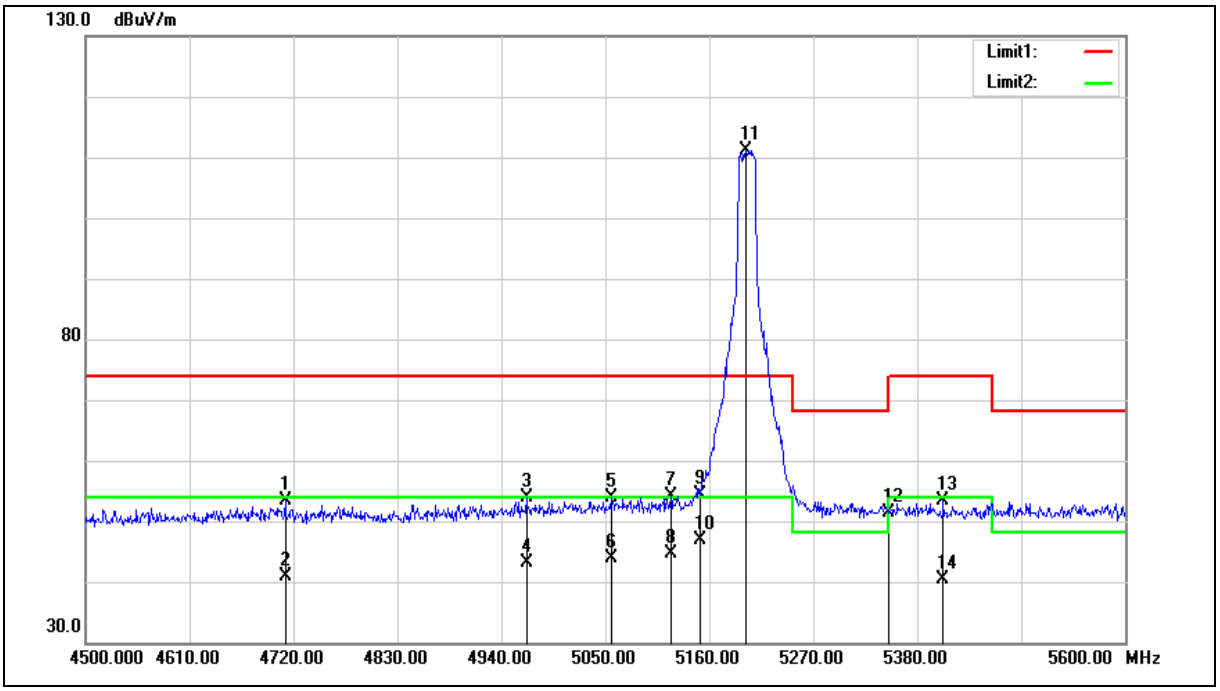

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5200 MHz		
Mode:	Mode 13		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4711.200	55.06	-1.57	53.49	74.00	-20.51	peak
2	4711.200	42.54	-1.57	40.97	54.00	-13.03	AVG
3	4966.400	54.67	-0.87	53.80	74.00	-20.20	peak
4	4966.400	44.01	-0.87	43.14	54.00	-10.86	AVG
5	5056.600	54.46	-0.65	53.81	74.00	-20.19	peak
6	5056.600	44.54	-0.65	43.89	54.00	-10.11	AVG
7	5119.300	54.74	-0.53	54.21	74.00	-19.79	peak
8	5119.300	45.21	-0.53	44.68	54.00	-9.32	AVG
9	5150.000	54.97	-0.48	54.49	74.00	-19.51	peak
10	5150.000	47.33	-0.48	46.85	54.00	-7.15	AVG
11	5198.500	111.57	-0.37	111.20	--	--	peak
12	5350.000	51.42	-0.08	51.34	74.00	-22.66	peak
13	5407.500	53.38	0.04	53.42	74.00	-20.58	peak
14	5407.500	40.31	0.04	40.35	54.00	-13.65	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5200 MHz		
Mode:	Mode 13		
Ant.Polar.:	Vertical		

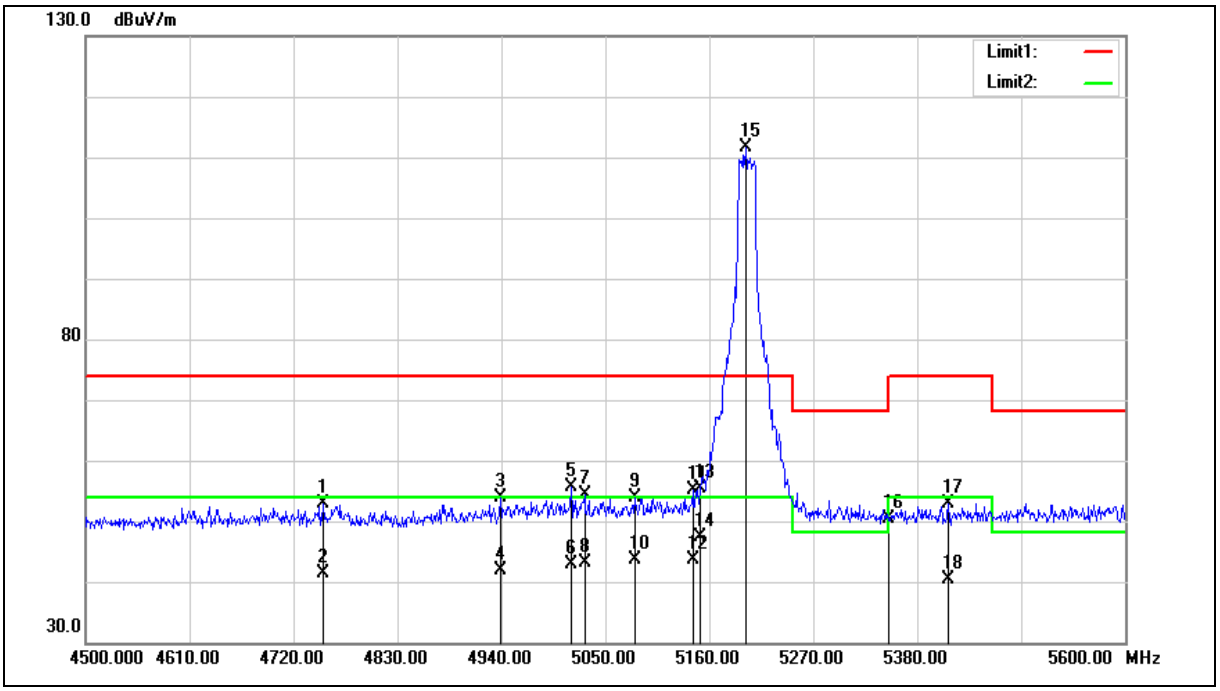

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5200 MHz		
Mode:	Mode 13		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4751.900	54.27	-1.46	52.81	74.00	-21.19	peak
2	4751.900	42.72	-1.46	41.26	54.00	-12.74	AVG
3	4938.900	54.74	-0.94	53.80	74.00	-20.20	peak
4	4938.900	42.88	-0.94	41.94	54.00	-12.06	AVG
5	5013.700	56.43	-0.74	55.69	74.00	-18.31	peak
6	5013.700	43.56	-0.74	42.82	54.00	-11.18	AVG
7	5028.000	55.00	-0.72	54.28	74.00	-19.72	peak
8	5028.000	43.73	-0.72	43.01	54.00	-10.99	AVG
9	5080.800	54.44	-0.61	53.83	74.00	-20.17	peak
10	5080.800	44.19	-0.61	43.58	54.00	-10.42	AVG
11	5142.400	55.54	-0.49	55.05	74.00	-18.95	peak
12	5142.400	44.19	-0.49	43.70	54.00	-10.30	AVG
13	5150.000	55.90	-0.48	55.42	74.00	-18.58	peak
14	5150.000	47.83	-0.48	47.35	54.00	-6.65	AVG
15	5198.500	112.00	-0.37	111.63	--	--	peak
16	5350.000	50.58	-0.08	50.50	74.00	-23.50	peak
17	5413.000	52.87	0.04	52.91	74.00	-21.09	peak
18	5413.000	40.39	0.04	40.43	54.00	-13.57	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5240 MHz		
Mode:	Mode 13		
Ant.Polar.:	Horizontal		

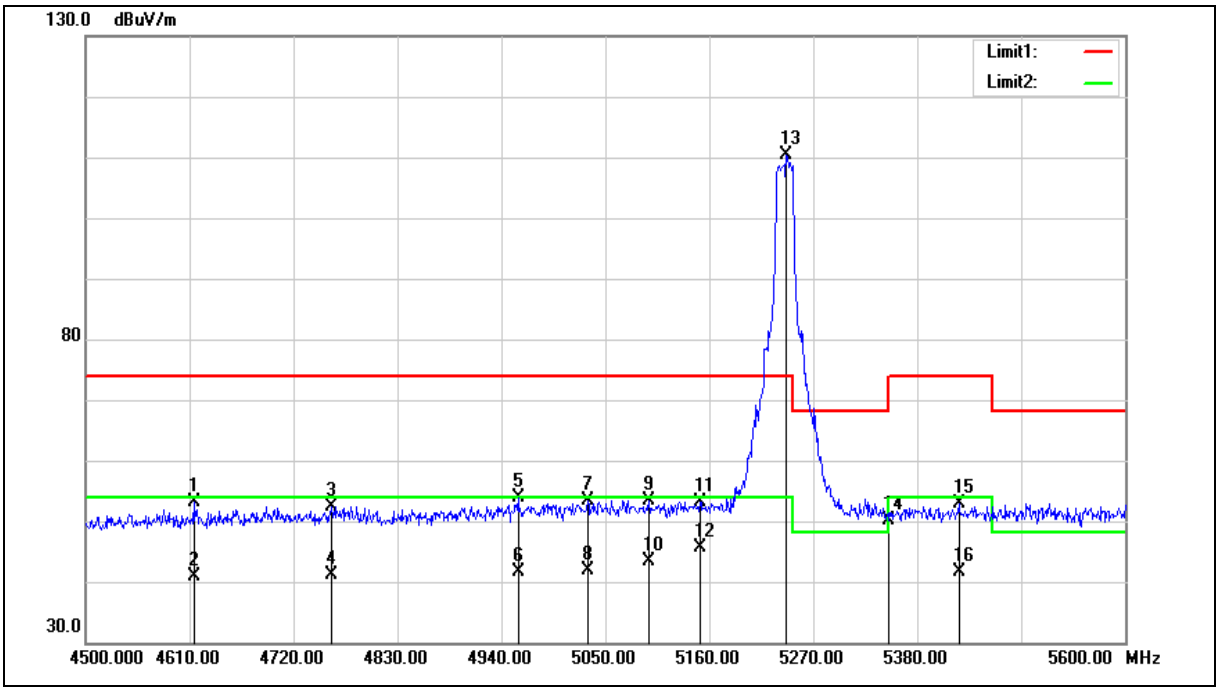

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5240 MHz		
Mode:	Mode 13		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4614.400	55.07	-1.83	53.24	74.00	-20.76	peak
2	4614.400	42.69	-1.83	40.86	54.00	-13.14	AVG
3	4760.700	53.76	-1.42	52.34	74.00	-21.66	peak
4	4760.700	42.58	-1.42	41.16	54.00	-12.84	AVG
5	4957.600	54.83	-0.89	53.94	74.00	-20.06	peak
6	4957.600	42.52	-0.89	41.63	54.00	-12.37	AVG
7	5031.300	54.12	-0.70	53.42	74.00	-20.58	peak
8	5031.300	42.66	-0.70	41.96	54.00	-12.04	AVG
9	5096.200	54.06	-0.57	53.49	74.00	-20.51	peak
10	5096.200	43.84	-0.57	43.27	54.00	-10.73	AVG
11	5150.000	53.59	-0.48	53.11	74.00	-20.89	peak
12	5150.000	46.06	-0.48	45.58	54.00	-8.42	AVG
13	5241.400	110.64	-0.29	110.35	--	--	peak
14	5350.000	50.16	-0.08	50.08	74.00	-23.92	peak
15	5424.000	52.87	0.06	52.93	74.00	-21.07	peak
16	5424.000	41.69	0.06	41.75	54.00	-12.25	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5240 MHz		
Mode:	Mode 13		
Ant.Polar.:	Vertical		

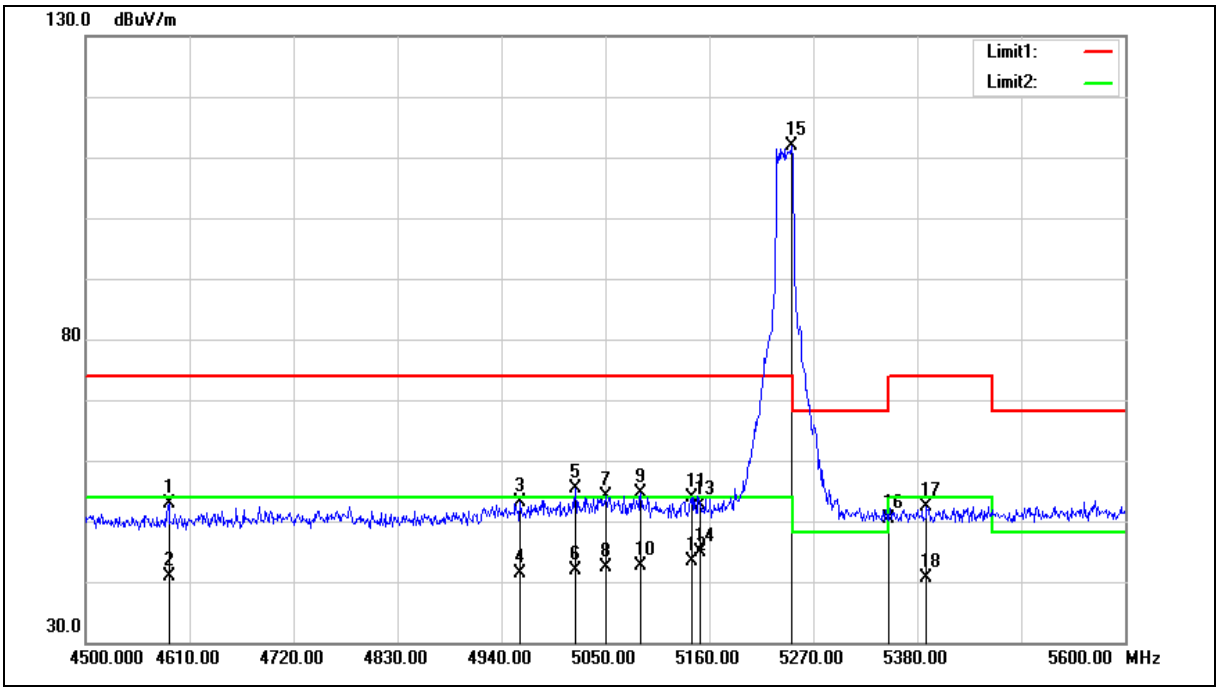

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5240 MHz		
Mode:	Mode 13		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4588.000	54.83	-1.90	52.93	74.00	-21.07	peak
2	4588.000	42.76	-1.90	40.86	54.00	-13.14	AVG
3	4959.800	53.98	-0.88	53.10	74.00	-20.90	peak
4	4959.800	42.25	-0.88	41.37	54.00	-12.63	AVG
5	5018.100	56.06	-0.74	55.32	74.00	-18.68	peak
6	5018.100	42.63	-0.74	41.89	54.00	-12.11	AVG
7	5051.100	54.89	-0.67	54.22	74.00	-19.78	peak
8	5051.100	43.16	-0.67	42.49	54.00	-11.51	AVG
9	5087.400	55.18	-0.60	54.58	74.00	-19.42	peak
10	5087.400	43.25	-0.60	42.65	54.00	-11.35	AVG
11	5141.300	54.48	-0.49	53.99	74.00	-20.01	peak
12	5141.300	43.80	-0.49	43.31	54.00	-10.69	AVG
13	5150.000	53.00	-0.48	52.52	74.00	-21.48	peak
14	5150.000	45.26	-0.48	44.78	54.00	-9.22	AVG
15	5246.900	112.10	-0.28	111.82	--	--	peak
16	5350.000	50.53	-0.08	50.45	74.00	-23.55	peak
17	5389.900	52.34	0.00	52.34	74.00	-21.66	peak
18	5389.900	40.66	0.00	40.66	54.00	-13.34	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5260 MHz		
Mode:	Mode 13		
Ant.Polar.:	Horizontal		

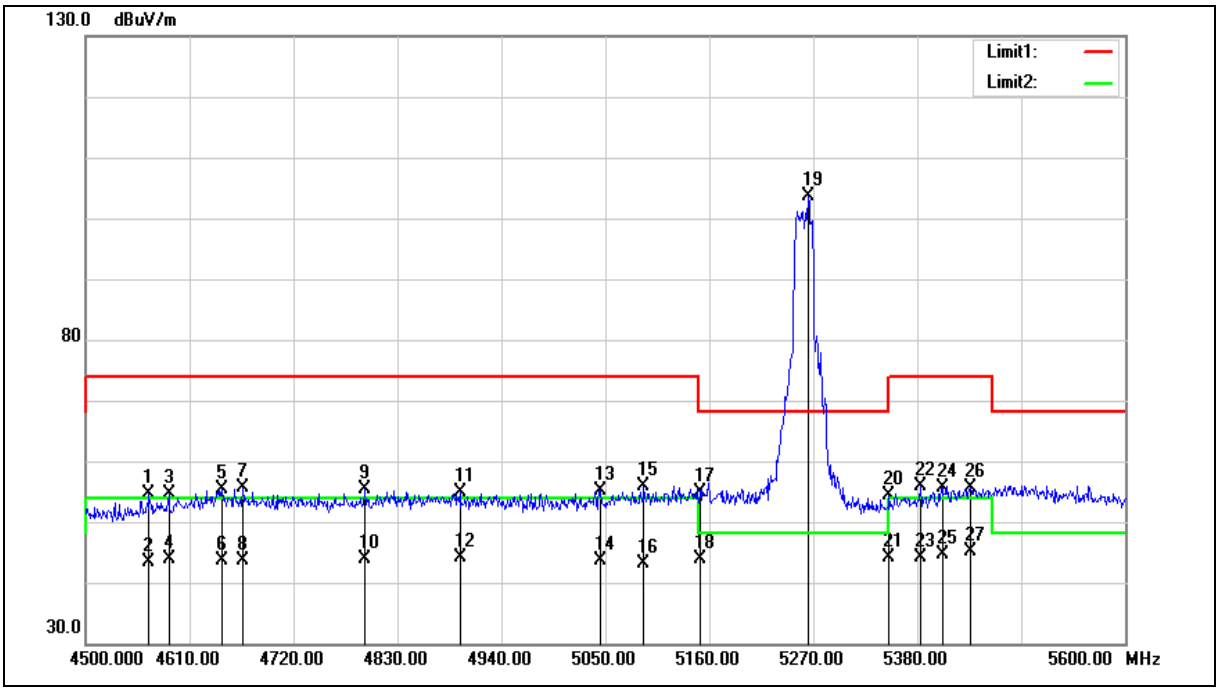

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5260 MHz		
Mode:	Mode 13		
Ant.Polar.:	Horizontal		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4567.100	50.91	3.66	54.57	74.00	-19.43	peak
2	4567.100	39.78	3.66	43.44	54.00	-10.56	AVG
3	4588.000	50.98	3.70	54.68	74.00	-19.32	peak
4	4588.000	40.06	3.70	43.76	54.00	-10.24	AVG
5	4644.100	51.60	3.84	55.44	74.00	-18.56	peak
6	4644.100	39.68	3.84	43.52	54.00	-10.48	AVG
7	4666.100	51.67	3.91	55.58	74.00	-18.42	peak
8	4666.100	39.79	3.91	43.70	54.00	-10.30	AVG
9	4795.900	51.07	4.23	55.30	74.00	-18.70	peak
10	4795.900	39.61	4.23	43.84	54.00	-10.16	AVG
11	4896.000	50.44	4.49	54.93	74.00	-19.07	peak
12	4896.000	39.53	4.49	44.02	54.00	-9.98	AVG
13	5044.500	50.30	4.86	55.16	74.00	-18.84	peak
14	5044.500	38.68	4.86	43.54	54.00	-10.46	AVG
15	5090.700	50.89	4.97	55.86	74.00	-18.14	peak
16	5090.700	38.24	4.97	43.21	54.00	-10.79	AVG
17	5150.000	49.67	5.12	54.79	74.00	-19.21	peak
18	5150.000	38.74	5.12	43.86	54.00	-10.14	AVG
19	5264.500	98.19	5.40	103.59	--	--	peak
20	5350.000	48.75	5.61	54.36	74.00	-19.64	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5260 MHz		
Mode:	Mode 13		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
21	5350.000	38.51	5.61	44.12	54.00	-9.88	AVG
22	5383.300	50.12	5.69	55.81	74.00	-18.19	peak
23	5383.300	38.34	5.69	44.03	54.00	-9.97	AVG
24	5406.400	49.86	5.75	55.61	74.00	-18.39	peak
25	5406.400	38.76	5.75	44.51	54.00	-9.49	AVG
26	5436.100	49.79	5.81	55.60	74.00	-18.40	peak
27	5436.100	39.22	5.81	45.03	54.00	-8.97	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5260 MHz		
Mode:	Mode 13		
Ant.Polar.:	Vertical		

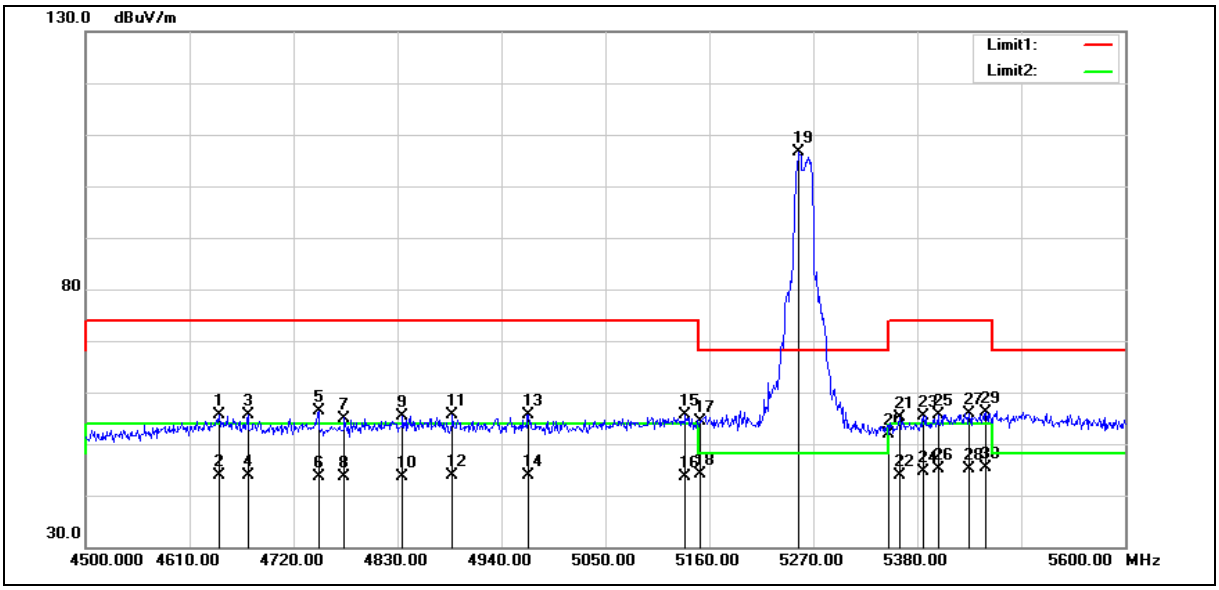

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5260 MHz		
Mode:	Mode 13		
Ant.Polar.:	Vertical		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4640.800	51.85	3.84	55.69	74.00	-18.31	peak
2	4640.800	39.97	3.84	43.81	54.00	-10.19	AVG
3	4671.600	51.60	3.91	55.51	74.00	-18.49	peak
4	4671.600	39.86	3.91	43.77	54.00	-10.23	AVG
5	4746.400	52.21	4.10	56.31	74.00	-17.69	peak
6	4746.400	39.53	4.10	43.63	54.00	-10.37	AVG
7	4773.900	50.82	4.18	55.00	74.00	-19.00	peak
8	4773.900	39.57	4.18	43.75	54.00	-10.25	AVG
9	4835.500	51.11	4.33	55.44	74.00	-18.56	peak
10	4835.500	39.39	4.33	43.72	54.00	-10.28	AVG
11	4888.300	51.15	4.46	55.61	74.00	-18.39	peak
12	4888.300	39.37	4.46	43.83	54.00	-10.17	AVG
13	4968.600	50.87	4.67	55.54	74.00	-18.46	peak
14	4968.600	39.30	4.67	43.97	54.00	-10.03	AVG
15	5134.700	50.46	5.08	55.54	74.00	-18.46	peak
16	5134.700	38.55	5.08	43.63	54.00	-10.37	AVG
17	5150.000	49.32	5.12	54.44	74.00	-19.56	peak
18	5150.000	38.95	5.12	44.07	54.00	-9.93	AVG
19	5254.600	101.32	5.37	106.69	--	--	peak
20	5350.000	46.34	5.61	51.95	74.00	-22.05	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5260 MHz		
Mode:	Mode 13		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
21	5361.300	49.38	5.64	55.02	74.00	-18.98	peak
22	5361.300	38.33	5.64	43.97	54.00	-10.03	AVG
23	5386.600	49.72	5.70	55.42	74.00	-18.58	peak
24	5386.600	38.82	5.70	44.52	54.00	-9.48	AVG
25	5402.000	49.84	5.73	55.57	74.00	-18.43	peak
26	5402.000	39.36	5.73	45.09	54.00	-8.91	AVG
27	5435.000	49.97	5.81	55.78	74.00	-18.22	peak
28	5435.000	39.24	5.81	45.05	54.00	-8.95	AVG
29	5452.600	50.23	5.85	56.08	74.00	-17.92	peak
30	5452.600	39.44	5.85	45.29	54.00	-8.71	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5280 MHz		
Mode:	Mode 13		
Ant.Polar.:	Horizontal		

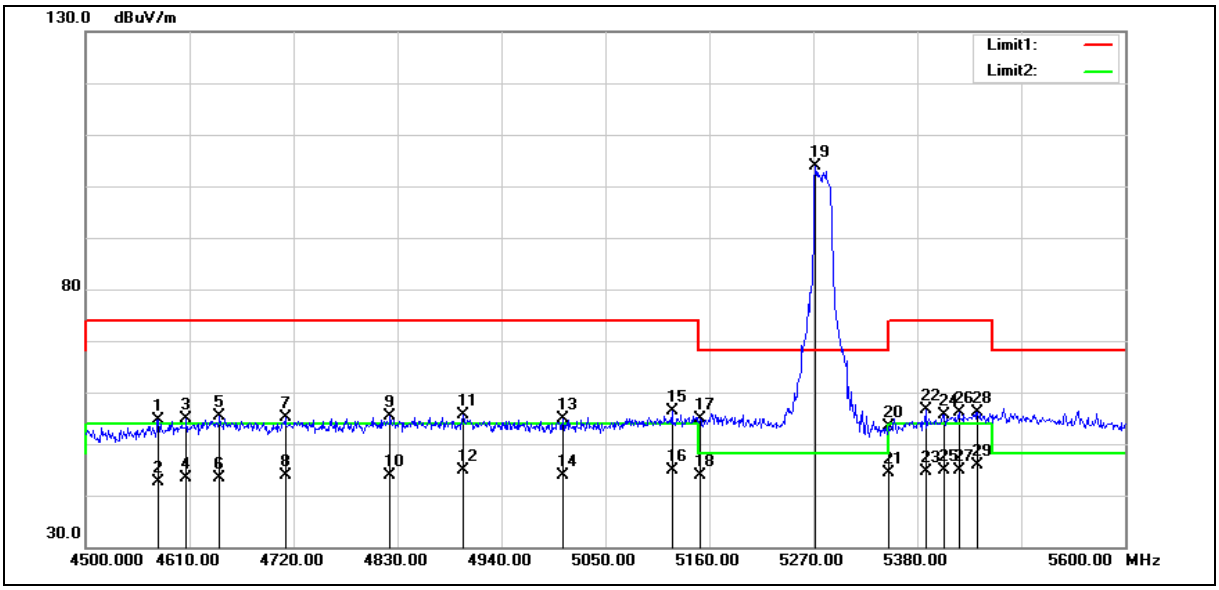

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5280 MHz		
Mode:	Mode 13		
Ant.Polar.:	Horizontal		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4577.000	51.05	3.67	54.72	74.00	-19.28	peak
2	4577.000	39.08	3.67	42.75	54.00	-11.25	AVG
3	4606.700	51.12	3.75	54.87	74.00	-19.13	peak
4	4606.700	39.52	3.75	43.27	54.00	-10.73	AVG
5	4641.900	51.64	3.84	55.48	74.00	-18.52	peak
6	4641.900	39.65	3.84	43.49	54.00	-10.51	AVG
7	4711.200	51.12	4.02	55.14	74.00	-18.86	peak
8	4711.200	39.85	4.02	43.87	54.00	-10.13	AVG
9	4822.300	51.09	4.31	55.40	74.00	-18.60	peak
10	4822.300	39.65	4.31	43.96	54.00	-10.04	AVG
11	4899.300	51.18	4.50	55.68	74.00	-18.32	peak
12	4899.300	40.40	4.50	44.90	54.00	-9.10	AVG
13	5004.900	50.23	4.76	54.99	74.00	-19.01	peak
14	5004.900	39.09	4.76	43.85	54.00	-10.15	AVG
15	5120.400	51.28	5.05	56.33	74.00	-17.67	peak
16	5120.400	39.91	5.05	44.96	54.00	-9.04	AVG
17	5150.000	49.77	5.12	54.89	74.00	-19.11	peak
18	5150.000	38.70	5.12	43.82	54.00	-10.18	AVG
19	5272.200	98.47	5.42	103.89	--	--	peak
20	5350.000	47.71	5.61	53.32	74.00	-20.68	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5280 MHz		
Mode:	Mode 13		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
21	5350.000	38.76	5.61	44.37	54.00	-9.63	AVG
22	5388.800	50.94	5.70	56.64	74.00	-17.36	peak
23	5388.800	38.88	5.70	44.58	54.00	-9.42	AVG
24	5408.600	49.92	5.76	55.68	74.00	-18.32	peak
25	5408.600	39.13	5.76	44.89	54.00	-9.11	AVG
26	5424.000	50.24	5.79	56.03	74.00	-17.97	peak
27	5424.000	39.06	5.79	44.85	54.00	-9.15	AVG
28	5443.800	50.25	5.84	56.09	74.00	-17.91	peak
29	5443.800	39.97	5.84	45.81	54.00	-8.19	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5280 MHz		
Mode:	Mode 13		
Ant.Polar.:	Vertical		

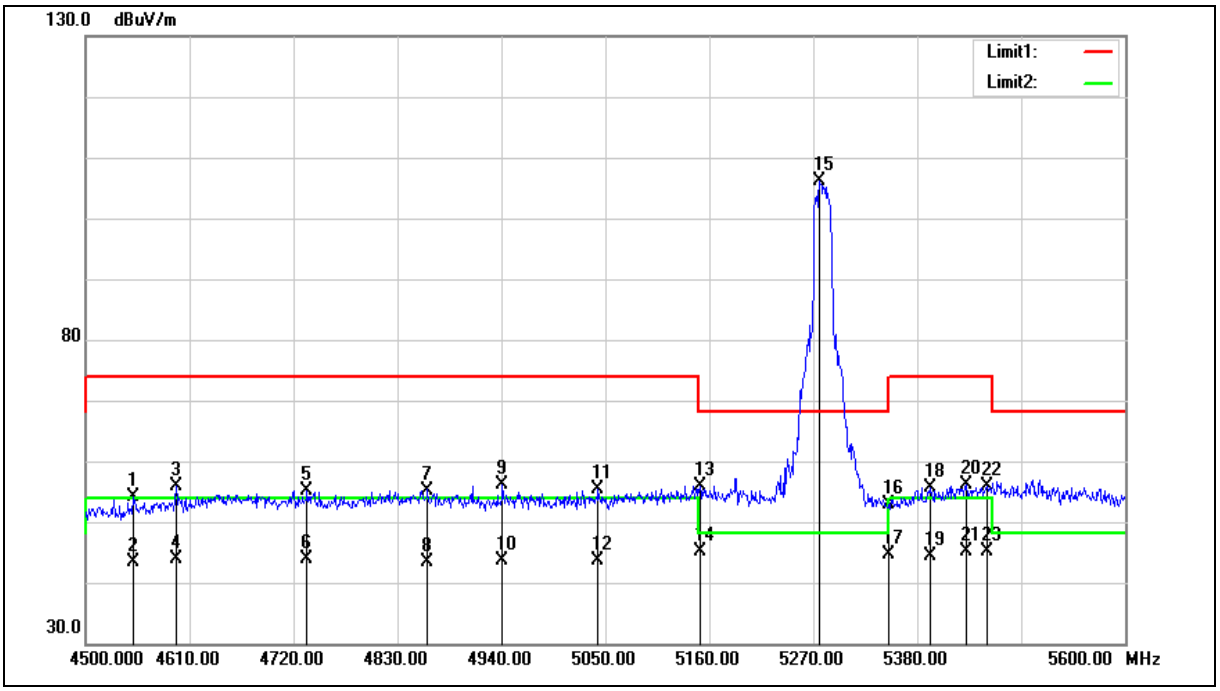

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5280 MHz		
Mode:	Mode 13		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4550.600	50.40	3.61	54.01	74.00	-19.99	peak
2	4550.600	39.77	3.61	43.38	54.00	-10.62	AVG
3	4595.700	52.16	3.72	55.88	74.00	-18.12	peak
4	4595.700	40.16	3.72	43.88	54.00	-10.12	AVG
5	4734.300	51.10	4.07	55.17	74.00	-18.83	peak
6	4734.300	39.77	4.07	43.84	54.00	-10.16	AVG
7	4861.900	50.85	4.40	55.25	74.00	-18.75	peak
8	4861.900	39.02	4.40	43.42	54.00	-10.58	AVG
9	4941.100	51.53	4.61	56.14	74.00	-17.86	peak
10	4941.100	39.09	4.61	43.70	54.00	-10.30	AVG
11	5042.300	50.58	4.85	55.43	74.00	-18.57	peak
12	5042.300	38.90	4.85	43.75	54.00	-10.25	AVG
13	5150.000	50.79	5.12	55.91	74.00	-18.09	peak
14	5150.000	39.92	5.12	45.04	54.00	-8.96	AVG
15	5276.600	100.62	5.43	106.05	--	--	peak
16	5350.000	47.23	5.61	52.84	74.00	-21.16	peak
17	5350.000	38.94	5.61	44.55	54.00	-9.45	AVG
18	5393.200	50.02	5.71	55.73	74.00	-18.27	peak
19	5393.200	38.61	5.71	44.32	54.00	-9.68	AVG
20	5431.700	50.21	5.82	56.03	74.00	-17.97	peak
21	5431.700	39.29	5.82	45.11	54.00	-8.89	AVG
22	5453.700	49.97	5.86	55.83	74.00	-18.17	peak
23	5453.700	39.39	5.86	45.25	54.00	-8.75	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5320 MHz		
Mode:	Mode 13		
Ant.Polar.:	Horizontal		

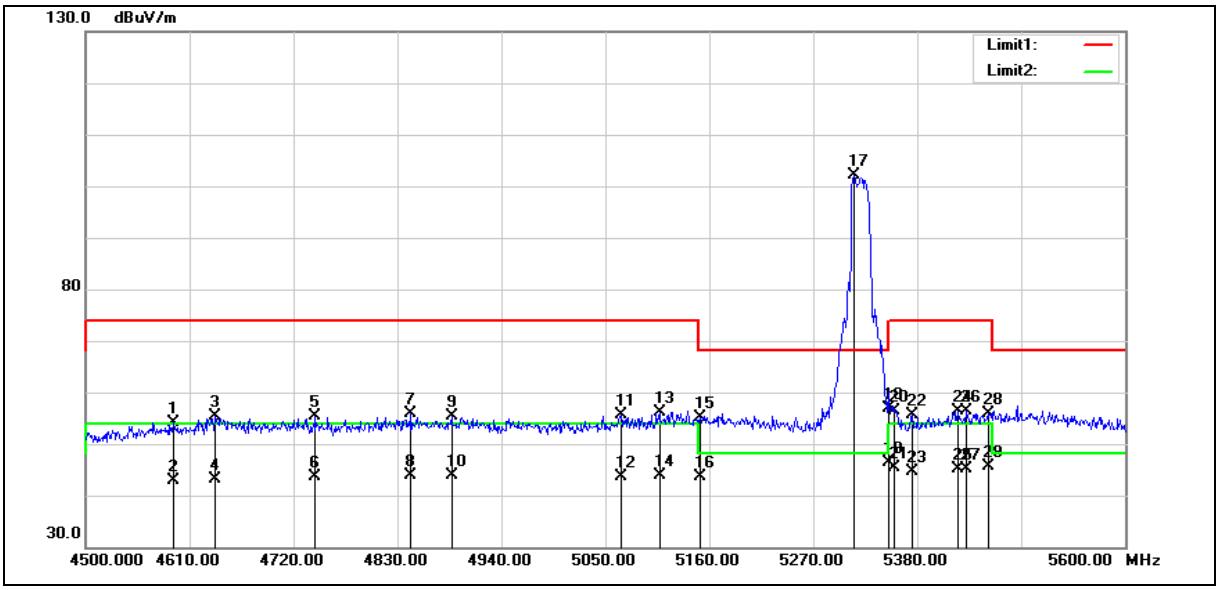

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5320 MHz		
Mode:	Mode 13		
Ant.Polar.:	Horizontal		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4593.500	50.40	3.72	54.12	74.00	-19.88	peak
2	4593.500	39.27	3.72	42.99	54.00	-11.01	AVG
3	4636.400	51.44	3.83	55.27	74.00	-18.73	peak
4	4636.400	39.38	3.83	43.21	54.00	-10.79	AVG
5	4743.100	51.22	4.10	55.32	74.00	-18.68	peak
6	4743.100	39.61	4.10	43.71	54.00	-10.29	AVG
7	4844.300	51.57	4.35	55.92	74.00	-18.08	peak
8	4844.300	39.53	4.35	43.88	54.00	-10.12	AVG
9	4887.200	51.02	4.46	55.48	74.00	-18.52	peak
10	4887.200	39.36	4.46	43.82	54.00	-10.18	AVG
11	5066.500	50.66	4.91	55.57	74.00	-18.43	peak
12	5066.500	38.77	4.91	43.68	54.00	-10.32	AVG
13	5107.200	51.18	5.01	56.19	74.00	-17.81	peak
14	5107.200	38.90	5.01	43.91	54.00	-10.09	AVG
15	5150.000	49.98	5.12	55.10	74.00	-18.90	peak
16	5150.000	38.53	5.12	43.65	54.00	-10.35	AVG
17	5312.900	96.62	5.51	102.13	--	--	peak
18	5350.000	51.18	5.61	56.79	74.00	-17.21	peak
19	5350.000	40.73	5.61	46.34	54.00	-7.66	AVG
20	5355.800	50.84	5.62	56.46	74.00	-17.54	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5320 MHz		
Mode:	Mode 13		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
21	5355.800	39.69	5.62	45.31	54.00	-8.69	AVG
22	5374.500	49.91	5.66	55.57	74.00	-18.43	peak
23	5374.500	39.08	5.66	44.74	54.00	-9.26	AVG
24	5422.900	50.68	5.79	56.47	74.00	-17.53	peak
25	5422.900	39.42	5.79	45.21	54.00	-8.79	AVG
26	5431.700	50.57	5.82	56.39	74.00	-17.61	peak
27	5431.700	39.21	5.82	45.03	54.00	-8.97	AVG
28	5454.800	50.09	5.86	55.95	74.00	-18.05	peak
29	5454.800	39.73	5.86	45.59	54.00	-8.41	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5320 MHz		
Mode:	Mode 13		
Ant.Polar.:	Vertical		

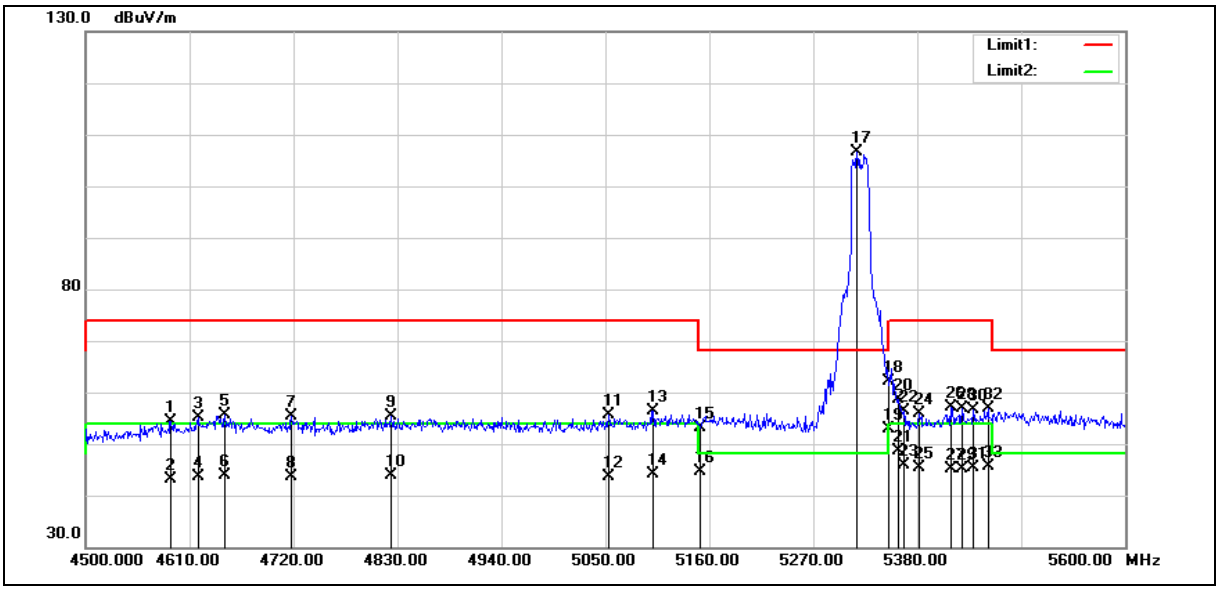

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5320 MHz		
Mode:	Mode 13		
Ant.Polar.:	Vertical		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4590.200	50.77	3.70	54.47	74.00	-19.53	peak
2	4590.200	39.40	3.70	43.10	54.00	-10.90	AVG
3	4618.800	51.36	3.78	55.14	74.00	-18.86	peak
4	4618.800	39.89	3.78	43.67	54.00	-10.33	AVG
5	4647.400	51.78	3.86	55.64	74.00	-18.36	peak
6	4647.400	40.11	3.86	43.97	54.00	-10.03	AVG
7	4717.800	51.33	4.03	55.36	74.00	-18.64	peak
8	4717.800	39.70	4.03	43.73	54.00	-10.27	AVG
9	4823.400	51.10	4.31	55.41	74.00	-18.59	peak
10	4823.400	39.58	4.31	43.89	54.00	-10.11	AVG
11	5053.300	50.71	4.88	55.59	74.00	-18.41	peak
12	5053.300	38.72	4.88	43.60	54.00	-10.40	AVG
13	5100.600	51.43	4.99	56.42	74.00	-17.58	peak
14	5100.600	39.15	4.99	44.14	54.00	-9.86	AVG
15	5150.000	47.99	5.12	53.11	74.00	-20.89	peak
16	5150.000	39.54	5.12	44.66	54.00	-9.34	AVG
17	5316.200	101.03	5.52	106.55	--	--	peak
18	5350.000	56.50	5.61	62.11	74.00	-11.89	peak
19	5350.000	47.15	5.61	52.76	54.00	-1.24	AVG
20	5360.200	52.94	5.64	58.58	74.00	-15.42	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5320 MHz		
Mode:	Mode 13		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
21	5360.200	43.09	5.64	48.73	54.00	-5.27	AVG
22	5365.700	50.68	5.65	56.33	74.00	-17.67	peak
23	5365.700	40.29	5.65	45.94	54.00	-8.06	AVG
24	5382.200	50.15	5.69	55.84	74.00	-18.16	peak
25	5382.200	39.69	5.69	45.38	54.00	-8.62	AVG
26	5415.200	51.33	5.77	57.10	74.00	-16.90	peak
27	5415.200	39.45	5.77	45.22	54.00	-8.78	AVG
28	5427.300	51.08	5.80	56.88	74.00	-17.12	peak
29	5427.300	39.38	5.80	45.18	54.00	-8.82	AVG
30	5439.400	50.84	5.82	56.66	74.00	-17.34	peak
31	5439.400	39.54	5.82	45.36	54.00	-8.64	AVG
32	5454.800	51.10	5.86	56.96	74.00	-17.04	peak
33	5454.800	39.66	5.86	45.52	54.00	-8.48	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5500 MHz		
Mode:	Mode 13		
Ant.Polar.:	Horizontal		

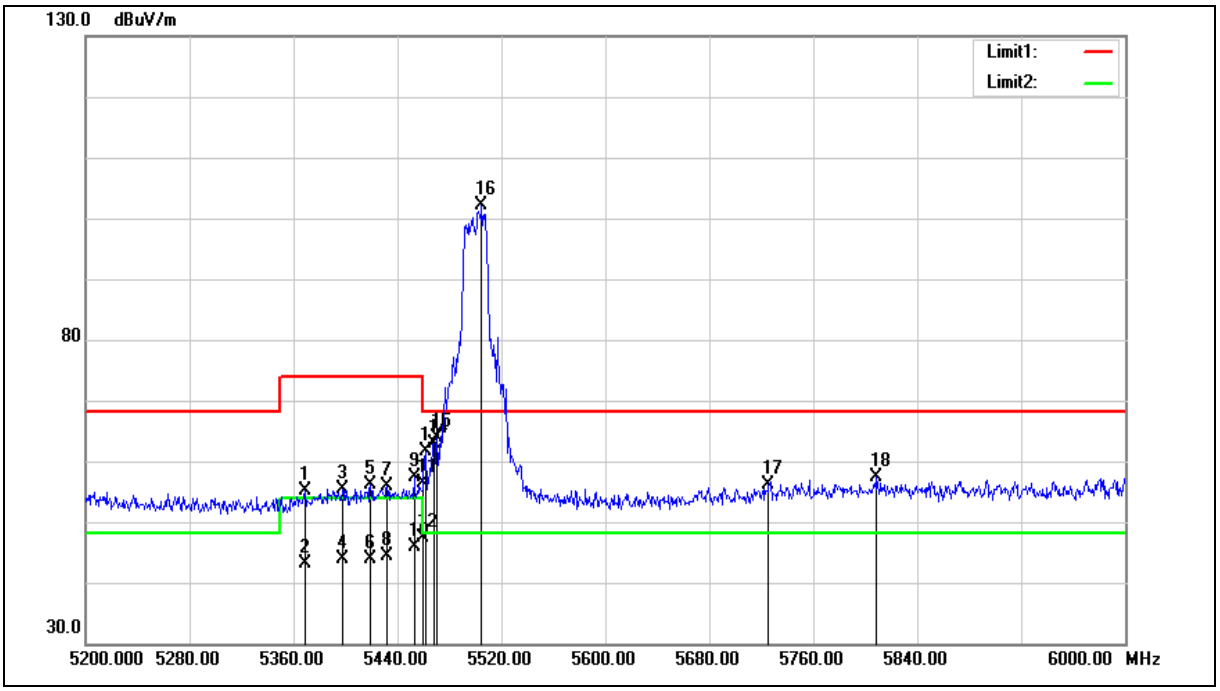

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5500 MHz		
Mode:	Mode 13		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5368.800	49.41	5.65	55.06	74.00	-18.94	peak
2	5368.800	37.54	5.65	43.19	54.00	-10.81	AVG
3	5397.600	49.68	5.73	55.41	74.00	-18.59	peak
4	5397.600	38.09	5.73	43.82	54.00	-10.18	AVG
5	5419.200	50.42	5.78	56.20	74.00	-17.80	peak
6	5419.200	38.21	5.78	43.99	54.00	-10.01	AVG
7	5432.000	50.03	5.82	55.85	74.00	-18.15	peak
8	5432.000	38.65	5.82	44.47	54.00	-9.53	AVG
9	5452.800	51.53	5.86	57.39	74.00	-16.61	peak
10	5452.800	39.90	5.86	45.76	54.00	-8.24	AVG
11	5460.000	50.57	5.88	56.45	74.00	-17.55	peak
12	5460.000	41.54	5.88	47.42	54.00	-6.58	AVG
13	5461.600	55.64	5.88	61.52	68.20	-6.68	peak
14	5468.000	57.07	5.89	62.96	68.20	-5.24	peak
15	5470.000	57.90	5.91	63.81	68.20	-4.39	peak
16	5504.800	96.21	5.98	102.19	--	--	peak
17	5725.000	49.73	6.47	56.20	68.20	-12.00	peak
18	5808.800	50.78	6.66	57.44	68.20	-10.76	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5500 MHz		
Mode:	Mode 13		
Ant.Polar.:	Vertical		

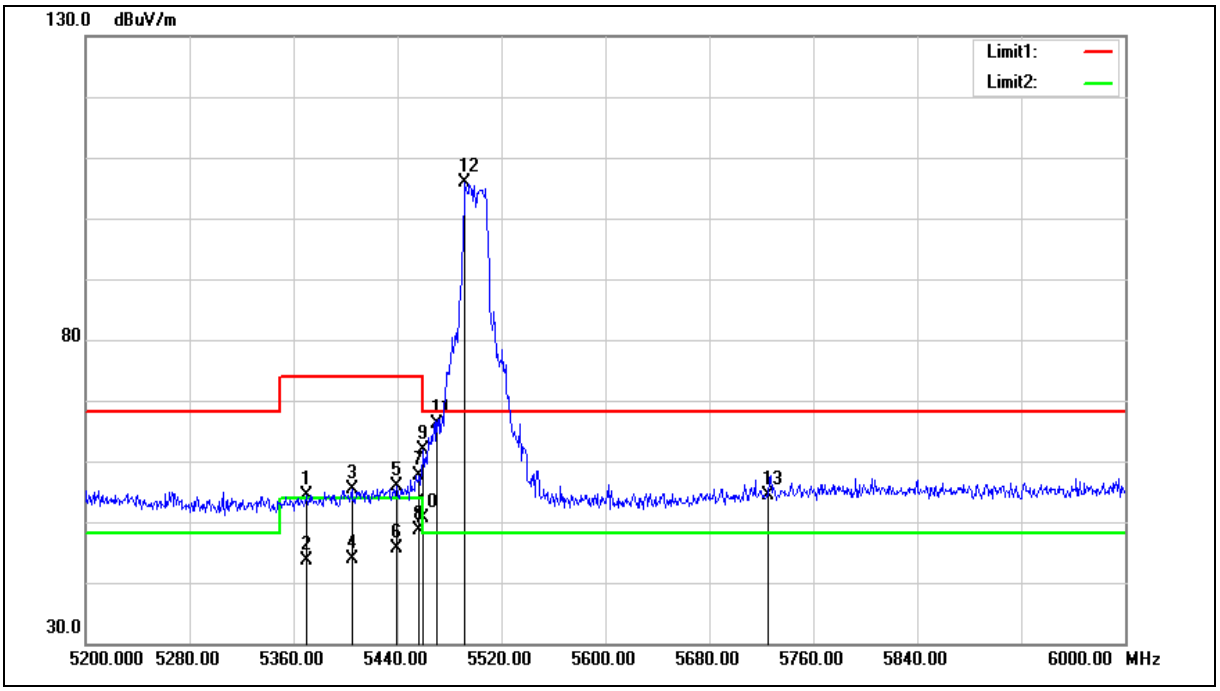

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5500 MHz		
Mode:	Mode 13		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5369.600	48.72	5.66	54.38	74.00	-19.62	peak
2	5369.600	37.98	5.66	43.64	54.00	-10.36	AVG
3	5404.800	49.72	5.74	55.46	74.00	-18.54	peak
4	5404.800	38.08	5.74	43.82	54.00	-10.18	AVG
5	5439.200	50.14	5.82	55.96	74.00	-18.04	peak
6	5439.200	39.83	5.82	45.65	54.00	-8.35	AVG
7	5456.800	51.87	5.87	57.74	74.00	-16.26	peak
8	5456.800	42.88	5.87	48.75	54.00	-5.25	AVG
9	5460.000	56.11	5.88	61.99	74.00	-12.01	peak
10	5460.000	44.86	5.88	50.74	54.00	-3.26	AVG
11	5470.000	60.32	5.91	66.23	68.20	-1.97	peak
12	5492.000	99.93	5.96	105.89	--	--	peak
13	5725.000	47.79	6.47	54.26	68.20	-13.94	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5560 MHz		
Mode:	Mode 13		
Ant.Polar.:	Horizontal		

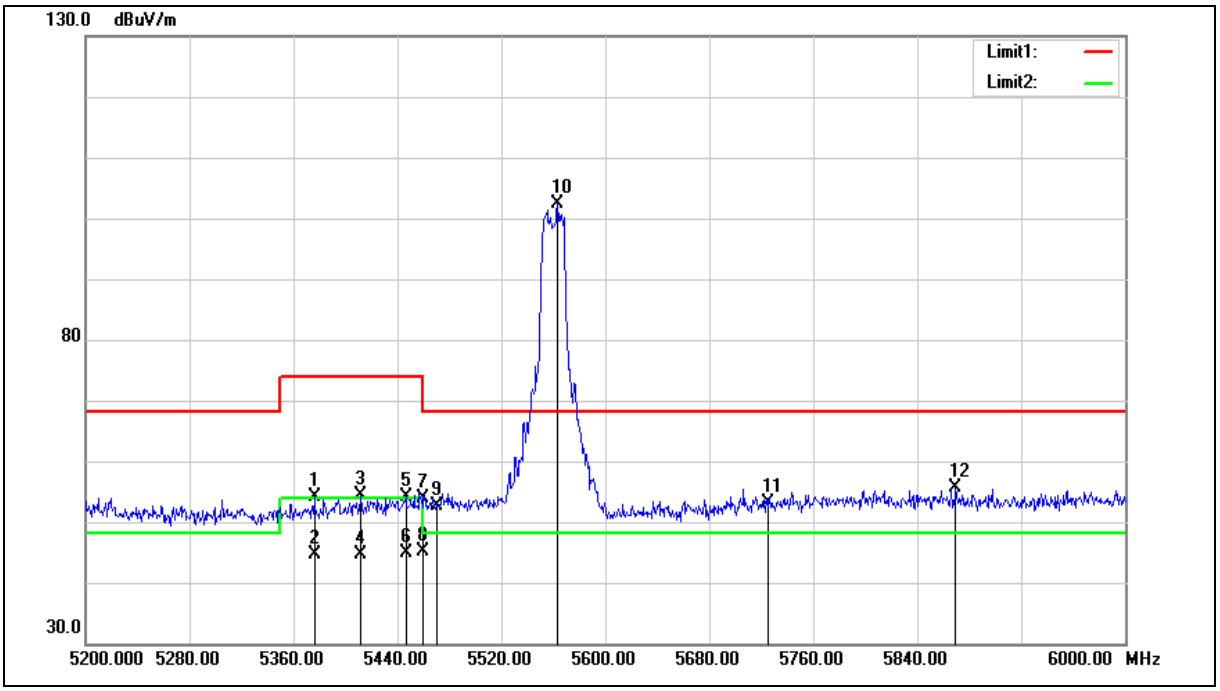

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5560 MHz		
Mode:	Mode 13		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5376.000	48.37	5.67	54.04	74.00	-19.96	peak
2	5376.000	38.91	5.67	44.58	54.00	-9.42	AVG
3	5412.000	48.55	5.76	54.31	74.00	-19.69	peak
4	5412.000	38.93	5.76	44.69	54.00	-9.31	AVG
5	5446.400	48.35	5.84	54.19	74.00	-19.81	peak
6	5446.400	39.02	5.84	44.86	54.00	-9.14	AVG
7	5460.000	47.89	5.88	53.77	74.00	-20.23	peak
8	5460.000	39.27	5.88	45.15	54.00	-8.85	AVG
9	5470.000	46.74	5.91	52.65	68.20	-15.55	peak
10	5563.200	96.20	6.12	102.32	--	--	peak
11	5725.000	46.54	6.47	53.01	68.20	-15.19	peak
12	5869.600	48.78	6.80	55.58	68.20	-12.62	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5560 MHz		
Mode:	Mode 13		
Ant.Polar.:	Vertical		

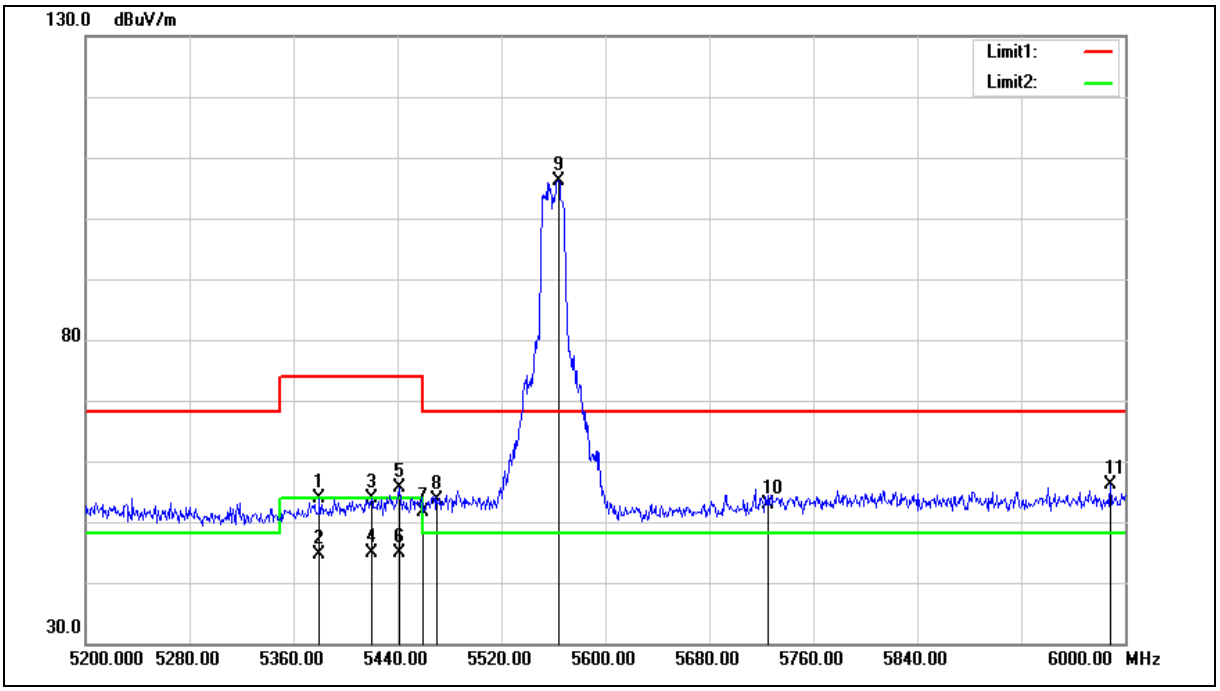

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5560 MHz		
Mode:	Mode 13		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5380.000	48.16	5.67	53.83	74.00	-20.17	peak
2	5380.000	38.85	5.67	44.52	54.00	-9.48	AVG
3	5420.000	48.04	5.79	53.83	74.00	-20.17	peak
4	5420.000	39.07	5.79	44.86	54.00	-9.14	AVG
5	5441.600	49.73	5.82	55.55	74.00	-18.45	peak
6	5441.600	39.15	5.82	44.97	54.00	-9.03	AVG
7	5460.000	45.63	5.88	51.51	74.00	-22.49	peak
8	5470.000	47.69	5.91	53.60	68.20	-14.60	peak
9	5564.000	100.12	6.12	106.24	--	--	peak
10	5725.000	46.36	6.47	52.83	68.20	-15.37	peak
11	5988.800	49.05	7.06	56.11	68.20	-12.09	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5700 MHz		
Mode:	Mode 13		
Ant.Polar.:	Horizontal		

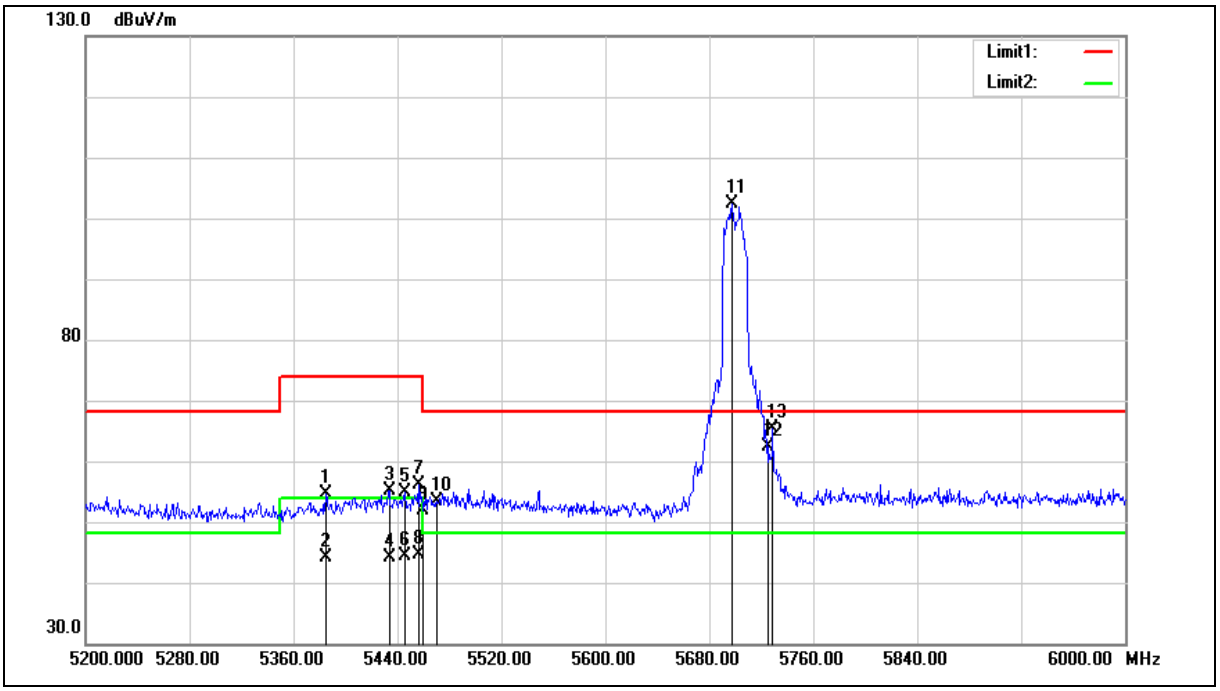

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5700 MHz		
Mode:	Mode 13		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5384.800	48.84	5.69	54.53	74.00	-19.47	peak
2	5384.800	38.33	5.69	44.02	54.00	-9.98	AVG
3	5433.600	49.43	5.81	55.24	74.00	-18.76	peak
4	5433.600	38.35	5.81	44.16	54.00	-9.84	AVG
5	5445.600	49.14	5.84	54.98	74.00	-19.02	peak
6	5445.600	38.64	5.84	44.48	54.00	-9.52	AVG
7	5456.000	50.33	5.86	56.19	74.00	-17.81	peak
8	5456.000	38.73	5.86	44.59	54.00	-9.41	AVG
9	5460.000	46.10	5.88	51.98	74.00	-22.02	peak
10	5470.000	47.53	5.91	53.44	68.20	-14.76	peak
11	5697.600	96.00	6.42	102.42	--	--	peak
12	5725.000	55.96	6.47	62.43	68.20	-5.77	peak
13	5728.800	58.97	6.48	65.45	68.20	-2.75	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5700 MHz		
Mode:	Mode 13		
Ant.Polar.:	Vertical		

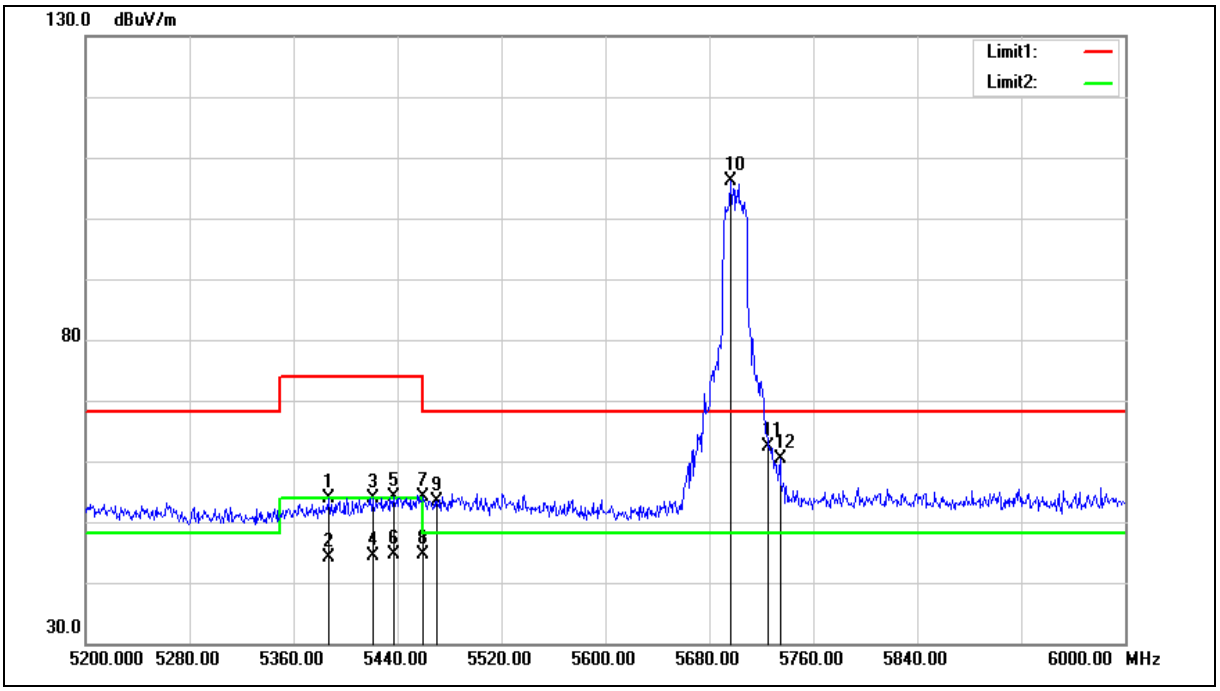

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5700 MHz		
Mode:	Mode 13		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5387.200	48.16	5.70	53.86	74.00	-20.14	peak
2	5387.200	38.31	5.70	44.01	54.00	-9.99	AVG
3	5420.800	48.18	5.79	53.97	74.00	-20.03	peak
4	5420.800	38.50	5.79	44.29	54.00	-9.71	AVG
5	5437.600	48.41	5.82	54.23	74.00	-19.77	peak
6	5437.600	38.74	5.82	44.56	54.00	-9.44	AVG
7	5460.000	48.31	5.88	54.19	74.00	-19.81	peak
8	5460.000	38.74	5.88	44.62	54.00	-9.38	AVG
9	5470.000	47.49	5.91	53.40	68.20	-14.80	peak
10	5696.000	99.78	6.41	106.19	--	--	peak
11	5725.000	55.88	6.47	62.35	68.20	-5.85	peak
12	5734.400	53.80	6.50	60.30	68.20	-7.90	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5745 MHz		
Mode:	Mode 13		
Ant.Polar.:	Horizontal		

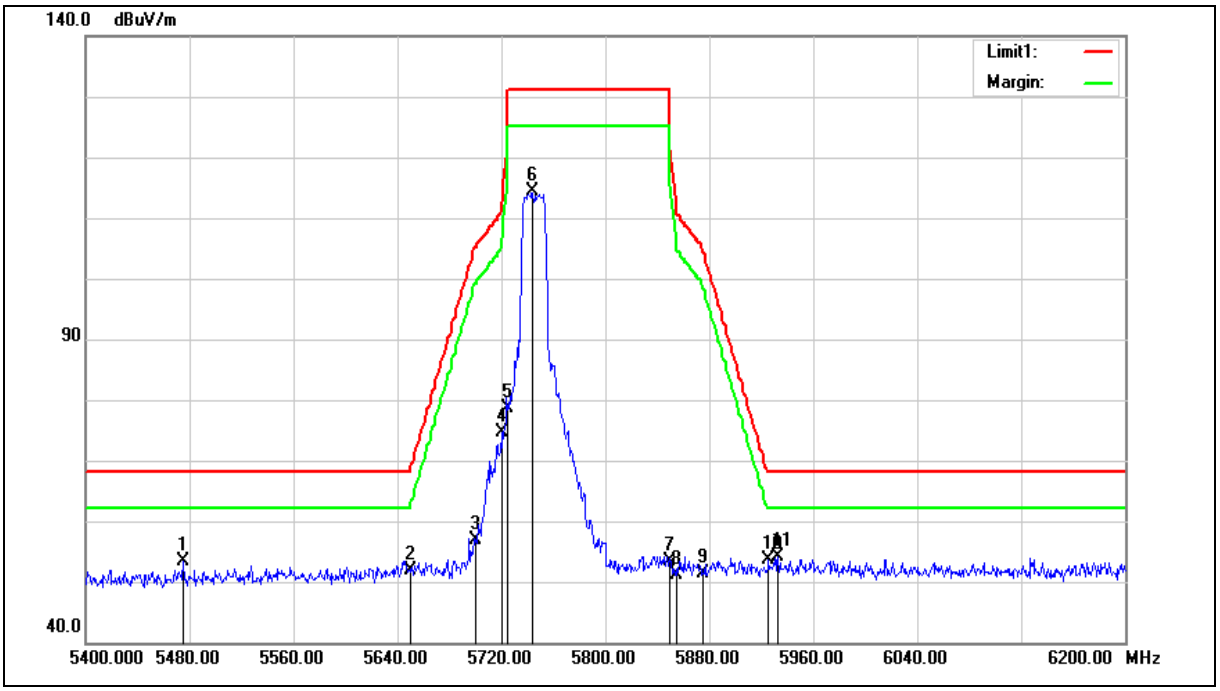

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5745 MHz		
Mode:	Mode 13		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5475.200	53.28	0.17	53.45	68.20	-14.75	peak
2	5650.000	51.32	0.62	51.94	68.20	-16.26	peak
3	5700.000	56.03	0.75	56.78	105.20	-48.42	peak
4	5720.000	73.73	0.81	74.54	110.80	-36.26	peak
5	5725.000	77.78	0.82	78.60	122.20	-43.60	peak
6	5744.000	113.40	0.87	114.27	--	--	peak
7	5850.000	52.17	1.17	53.34	122.20	-68.86	peak
8	5855.000	49.95	1.18	51.13	110.80	-59.67	peak
9	5875.000	50.03	1.23	51.26	105.20	-53.94	peak
10	5925.000	52.23	1.37	53.60	68.20	-14.60	peak
11	5932.800	52.78	1.38	54.16	68.20	-14.04	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5745 MHz		
Mode:	Mode 13		
Ant.Polar.:	Vertical		

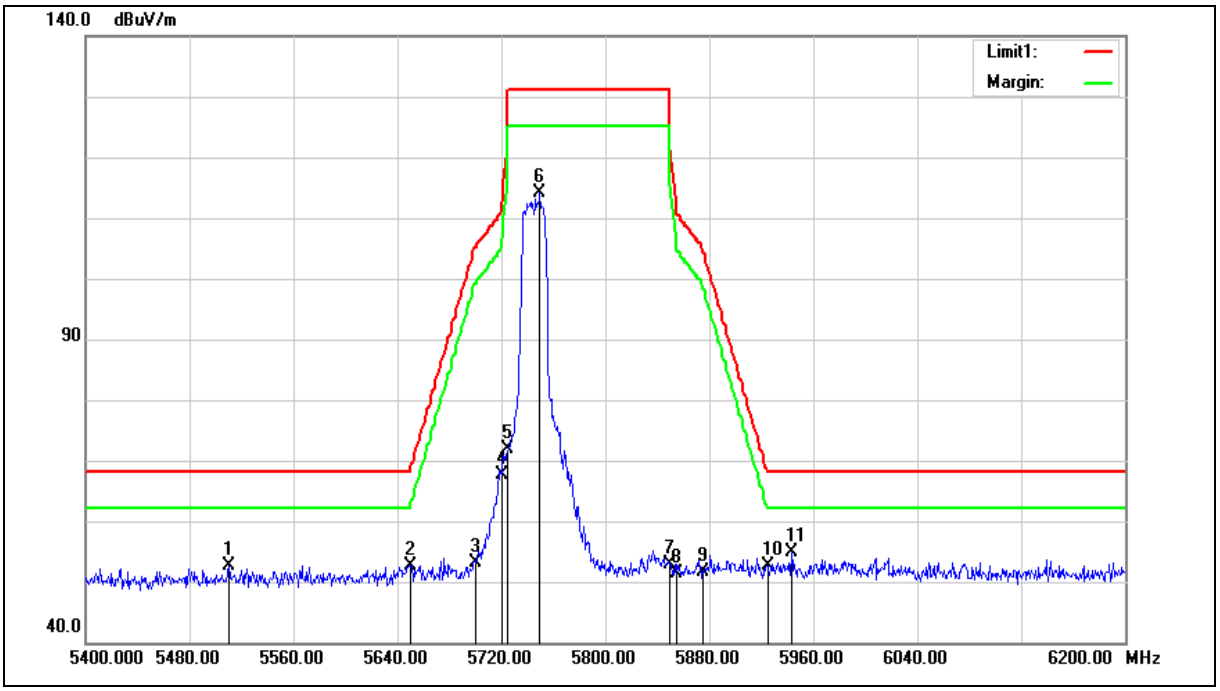

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5745 MHz		
Mode:	Mode 13		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5510.400	52.33	0.24	52.57	68.20	-15.63	peak
2	5650.000	52.08	0.62	52.70	68.20	-15.50	peak
3	5700.000	52.33	0.75	53.08	105.20	-52.12	peak
4	5720.000	66.75	0.81	67.56	110.80	-43.24	peak
5	5725.000	71.10	0.82	71.92	122.20	-50.28	peak
6	5749.600	113.24	0.89	114.13	--	--	peak
7	5850.000	51.76	1.17	52.93	122.20	-69.27	peak
8	5855.000	50.22	1.18	51.40	110.80	-59.40	peak
9	5875.000	50.37	1.23	51.60	105.20	-53.60	peak
10	5925.000	51.18	1.37	52.55	68.20	-15.65	peak
11	5943.200	53.38	1.42	54.80	68.20	-13.40	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5785 MHz		
Mode:	Mode 13		
Ant.Polar.:	Horizontal		

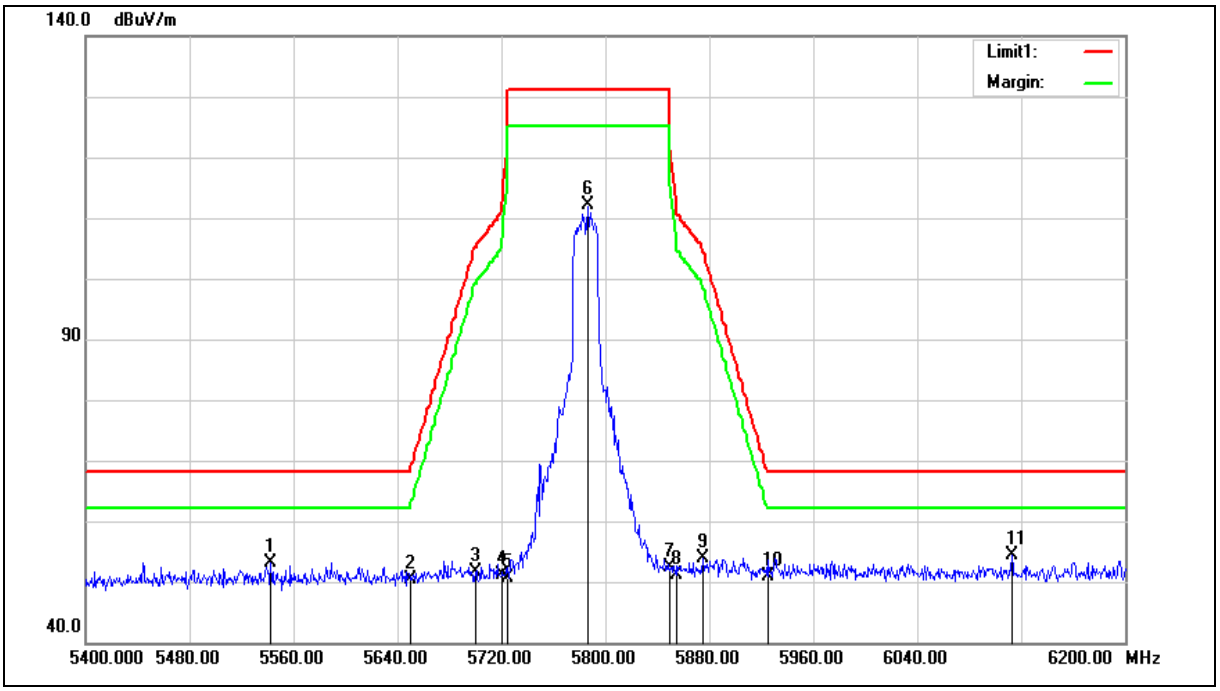

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5785 MHz		
Mode:	Mode 13		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5542.400	52.91	0.33	53.24	68.20	-14.96	peak
2	5650.000	49.83	0.62	50.45	68.20	-17.75	peak
3	5700.000	50.92	0.75	51.67	105.20	-53.53	peak
4	5720.000	50.35	0.81	51.16	110.80	-59.64	peak
5	5725.000	49.75	0.82	50.57	122.20	-71.63	peak
6	5786.400	111.02	0.99	112.01	--	--	peak
7	5850.000	51.21	1.17	52.38	122.20	-69.82	peak
8	5855.000	50.05	1.18	51.23	110.80	-59.57	peak
9	5875.000	52.58	1.23	53.81	105.20	-51.39	peak
10	5925.000	49.50	1.37	50.87	68.20	-17.33	peak
11	6112.800	52.41	1.97	54.38	68.20	-13.82	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5785 MHz		
Mode:	Mode 13		
Ant.Polar.:	Vertical		

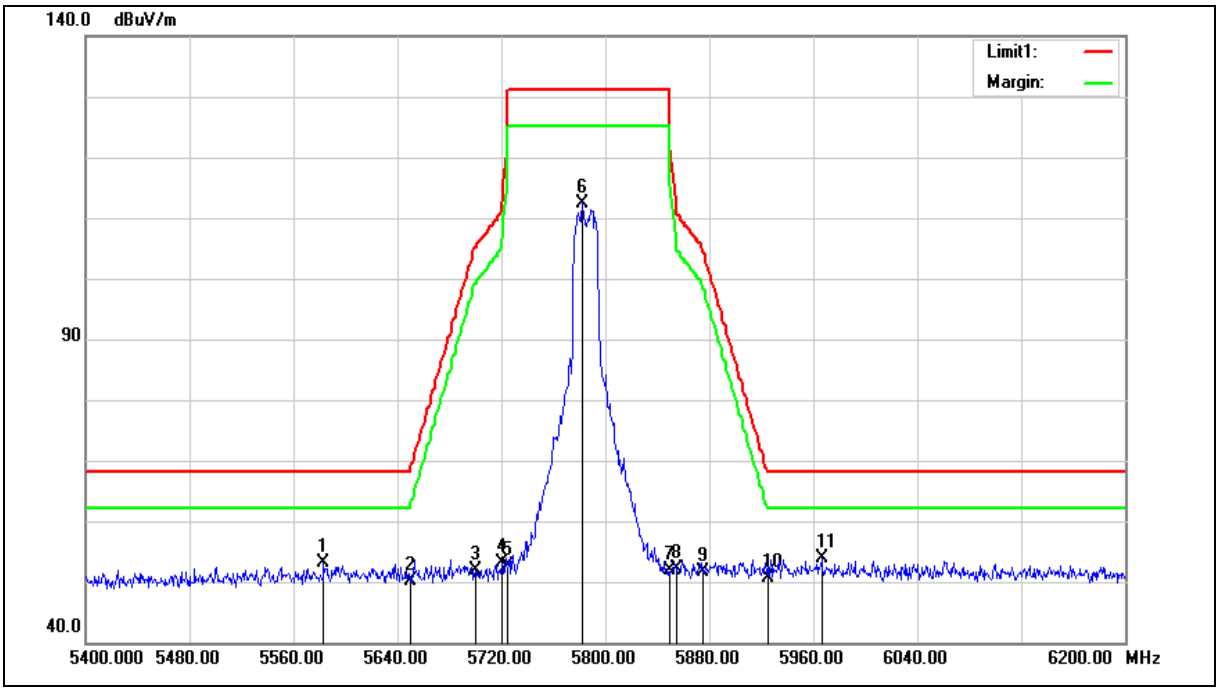

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5785 MHz		
Mode:	Mode 13		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5583.200	52.67	0.43	53.10	68.20	-15.10	peak
2	5650.000	49.54	0.62	50.16	68.20	-18.04	peak
3	5700.000	51.04	0.75	51.79	105.20	-53.41	peak
4	5720.000	52.32	0.81	53.13	110.80	-57.67	peak
5	5725.000	51.71	0.82	52.53	122.20	-69.67	peak
6	5782.400	111.45	0.98	112.43	--	--	peak
7	5850.000	50.71	1.17	51.88	122.20	-70.32	peak
8	5855.000	50.94	1.18	52.12	110.80	-58.68	peak
9	5875.000	50.33	1.23	51.56	105.20	-53.64	peak
10	5925.000	49.29	1.37	50.66	68.20	-17.54	peak
11	5966.400	52.31	1.49	53.80	68.20	-14.40	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5825 MHz		
Mode:	Mode 13		
Ant.Polar.:	Horizontal		

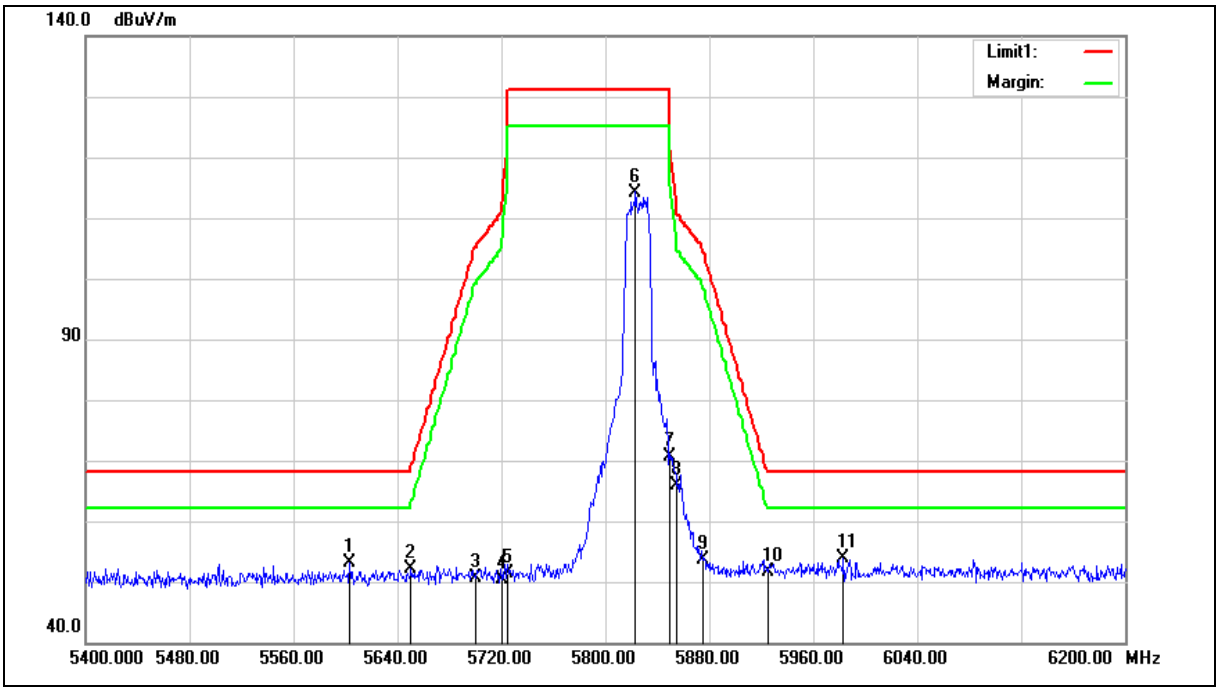

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5825 MHz		
Mode:	Mode 13		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5603.200	52.60	0.50	53.10	68.20	-15.10	peak
2	5650.000	51.55	0.62	52.17	68.20	-16.03	peak
3	5700.000	49.79	0.75	50.54	105.20	-54.66	peak
4	5720.000	49.64	0.81	50.45	110.80	-60.35	peak
5	5725.000	50.63	0.82	51.45	122.20	-70.75	peak
6	5823.200	112.99	1.10	114.09	--	--	peak
7	5850.000	69.53	1.17	70.70	122.20	-51.50	peak
8	5855.000	64.82	1.18	66.00	110.80	-44.80	peak
9	5875.000	52.37	1.23	53.60	105.20	-51.60	peak
10	5925.000	50.28	1.37	51.65	68.20	-16.55	peak
11	5983.200	52.36	1.52	53.88	68.20	-14.32	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5825 MHz		
Mode:	Mode 13		
Ant.Polar.:	Vertical		

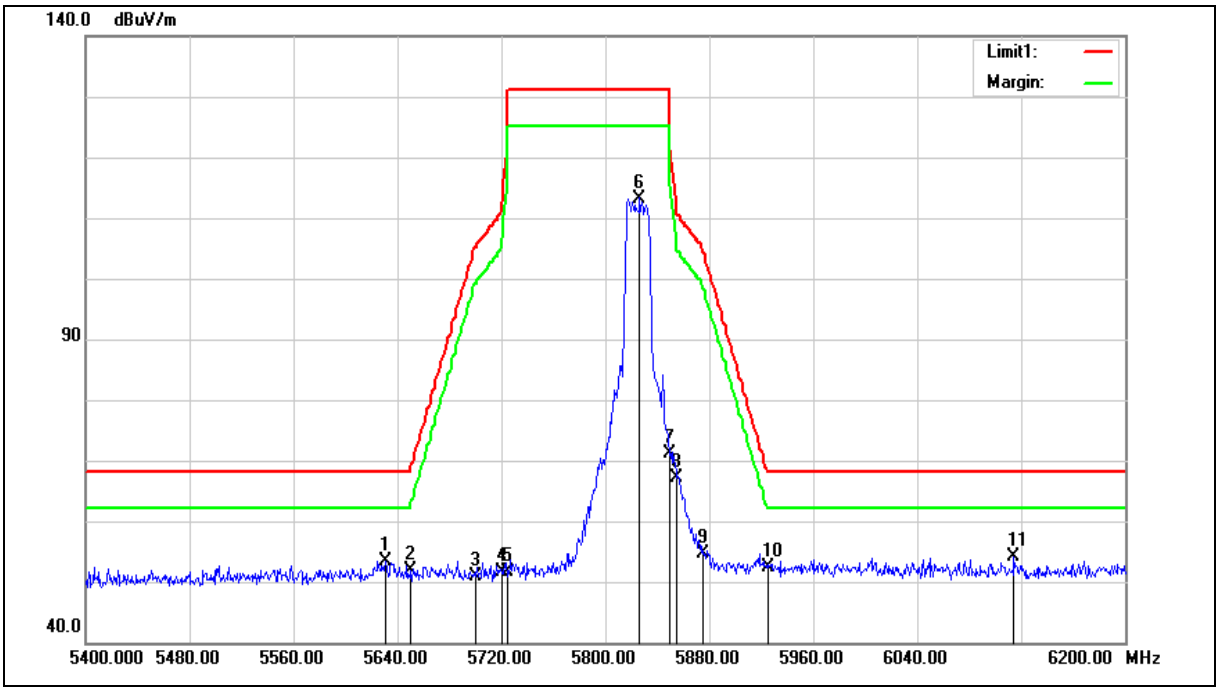

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5825 MHz		
Mode:	Mode 13		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5630.400	52.84	0.56	53.40	68.20	-14.80	peak
2	5650.000	51.28	0.62	51.90	68.20	-16.30	peak
3	5700.000	50.17	0.75	50.92	105.20	-54.28	peak
4	5720.000	50.92	0.81	51.73	110.80	-59.07	peak
5	5725.000	50.80	0.82	51.62	122.20	-70.58	peak
6	5826.400	112.09	1.10	113.19	--	--	peak
7	5850.000	69.89	1.17	71.06	122.20	-51.14	peak
8	5855.000	66.04	1.18	67.22	110.80	-43.58	peak
9	5875.000	53.41	1.23	54.64	105.20	-50.56	peak
10	5925.000	50.98	1.37	52.35	68.20	-15.85	peak
11	6114.400	52.26	1.97	54.23	68.20	-13.97	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5190 MHz		
Mode:	Mode 14		
Ant.Polar.:	Horizontal		

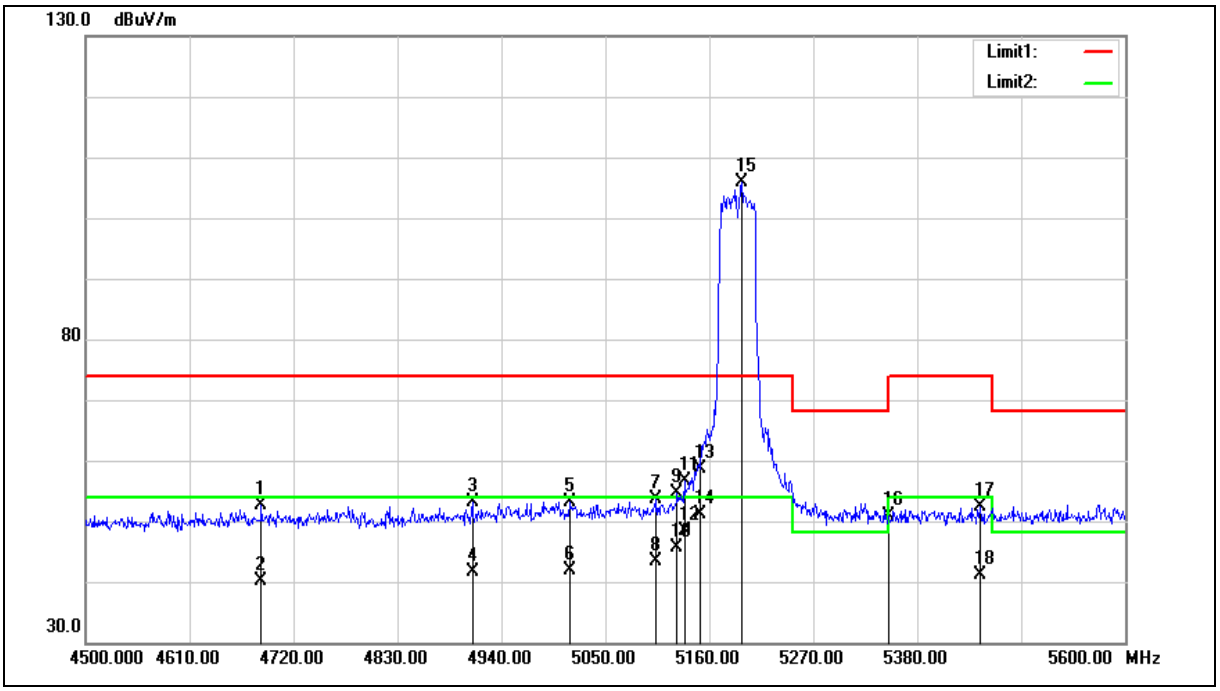

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5190 MHz		
Mode:	Mode 14		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4685.900	54.15	-1.64	52.51	74.00	-21.49	peak
2	4685.900	41.83	-1.64	40.19	54.00	-13.81	AVG
3	4909.200	54.04	-1.01	53.03	74.00	-20.97	peak
4	4909.200	42.58	-1.01	41.57	54.00	-12.43	AVG
5	5012.600	53.90	-0.74	53.16	74.00	-20.84	peak
6	5012.600	42.68	-0.74	41.94	54.00	-12.06	AVG
7	5103.900	54.16	-0.57	53.59	74.00	-20.41	peak
8	5103.900	44.04	-0.57	43.47	54.00	-10.53	AVG
9	5125.900	55.18	-0.52	54.66	74.00	-19.34	peak
10	5125.900	46.05	-0.52	45.53	54.00	-8.47	AVG
11	5133.600	57.14	-0.51	56.63	74.00	-17.37	peak
12	5133.600	49.01	-0.51	48.50	54.00	-5.50	AVG
13	5150.000	59.01	-0.48	58.53	74.00	-15.47	peak
14	5150.000	51.50	-0.48	51.02	54.00	-2.98	AVG
15	5194.100	106.27	-0.39	105.88	--	--	peak
16	5350.000	50.93	-0.08	50.85	74.00	-23.15	peak
17	5446.000	52.20	0.11	52.31	74.00	-21.69	peak
18	5446.000	40.92	0.11	41.03	54.00	-12.97	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5190 MHz		
Mode:	Mode 14		
Ant.Polar.:	Vertical		

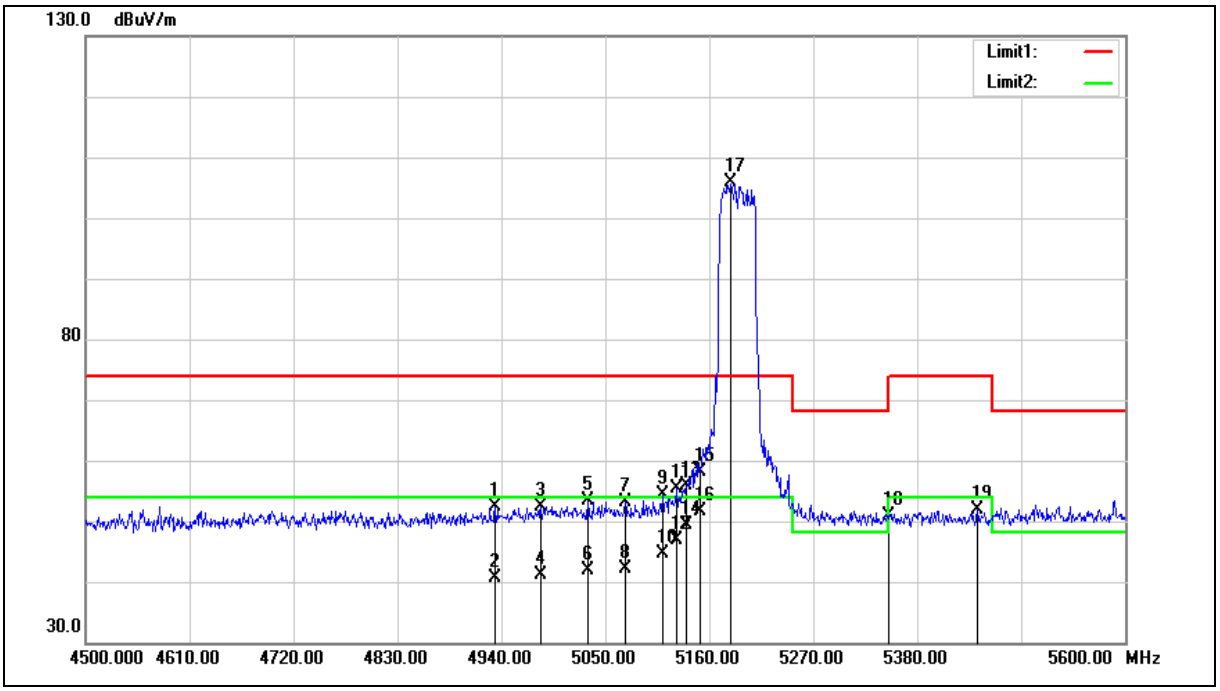

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5190 MHz		
Mode:	Mode 14		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4933.400	53.27	-0.95	52.32	74.00	-21.68	peak
2	4933.400	41.69	-0.95	40.74	54.00	-13.26	AVG
3	4981.800	53.27	-0.82	52.45	74.00	-21.55	peak
4	4981.800	42.03	-0.82	41.21	54.00	-12.79	AVG
5	5031.300	54.10	-0.70	53.40	74.00	-20.60	peak
6	5031.300	42.49	-0.70	41.79	54.00	-12.21	AVG
7	5070.900	53.72	-0.63	53.09	74.00	-20.91	peak
8	5070.900	42.83	-0.63	42.20	54.00	-11.80	AVG
9	5110.500	54.97	-0.55	54.42	74.00	-19.58	peak
10	5110.500	45.12	-0.55	44.57	54.00	-9.43	AVG
11	5125.900	56.02	-0.52	55.50	74.00	-18.50	peak
12	5125.900	47.34	-0.52	46.82	54.00	-7.18	AVG
13	5135.800	56.48	-0.50	55.98	74.00	-18.02	peak
14	5135.800	49.85	-0.50	49.35	54.00	-4.65	AVG
15	5150.000	58.67	-0.48	58.19	74.00	-15.81	peak
16	5150.000	52.06	-0.48	51.58	54.00	-2.42	AVG
17	5182.000	106.21	-0.40	105.81	--	--	peak
18	5350.000	50.90	-0.08	50.82	74.00	-23.18	peak
19	5443.800	51.78	0.11	51.89	74.00	-22.11	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5230 MHz		
Mode:	Mode 14		
Ant.Polar.:	Horizontal		

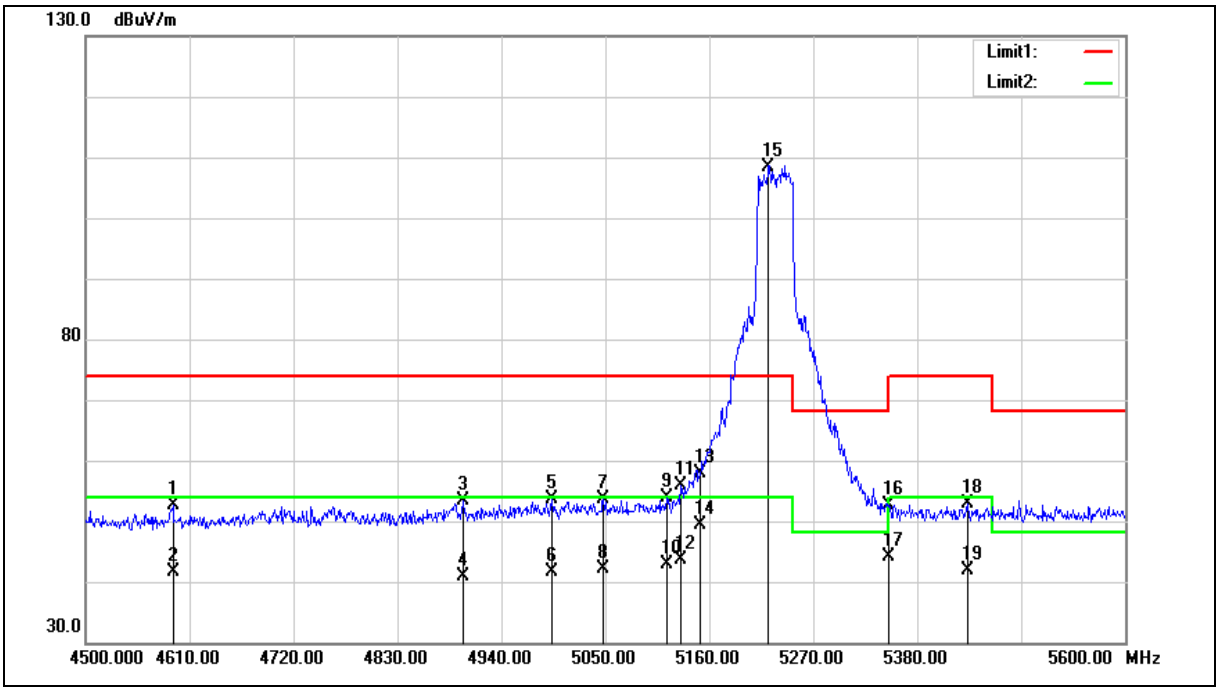

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5230 MHz		
Mode:	Mode 14		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4592.400	54.44	-1.89	52.55	74.00	-21.45	peak
2	4592.400	43.52	-1.89	41.63	54.00	-12.37	AVG
3	4899.300	54.37	-1.05	53.32	74.00	-20.68	peak
4	4899.300	41.95	-1.05	40.90	54.00	-13.10	AVG
5	4993.900	54.31	-0.78	53.53	74.00	-20.47	peak
6	4993.900	42.46	-0.78	41.68	54.00	-12.32	AVG
7	5047.800	54.22	-0.68	53.54	74.00	-20.46	peak
8	5047.800	42.79	-0.68	42.11	54.00	-11.89	AVG
9	5114.900	54.43	-0.54	53.89	74.00	-20.11	peak
10	5114.900	43.30	-0.54	42.76	54.00	-11.24	AVG
11	5129.200	56.45	-0.52	55.93	74.00	-18.07	peak
12	5129.200	44.20	-0.52	43.68	54.00	-10.32	AVG
13	5150.000	58.35	-0.48	57.87	74.00	-16.13	peak
14	5150.000	49.89	-0.48	49.41	54.00	-4.59	AVG
15	5222.700	108.82	-0.33	108.49	--	--	peak
16	5350.000	52.60	-0.08	52.52	74.00	-21.48	peak
17	5350.000	44.18	-0.08	44.10	54.00	-9.90	AVG
18	5432.800	52.91	0.09	53.00	74.00	-21.00	peak
19	5432.800	41.89	0.09	41.98	54.00	-12.02	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5230 MHz		
Mode:	Mode 14		
Ant.Polar.:	Vertical		

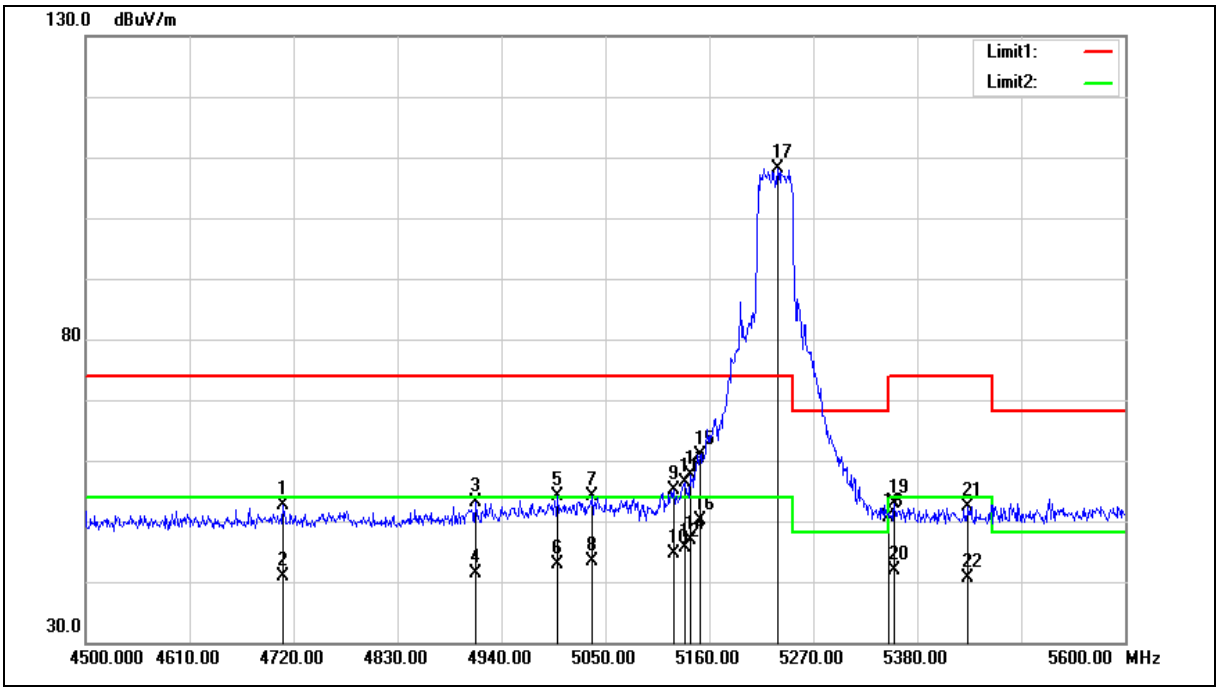

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5230 MHz		
Mode:	Mode 14		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4709.000	54.22	-1.57	52.65	74.00	-21.35	peak
2	4709.000	42.35	-1.57	40.78	54.00	-13.22	AVG
3	4912.500	54.14	-1.01	53.13	74.00	-20.87	peak
4	4912.500	42.27	-1.01	41.26	54.00	-12.74	AVG
5	4999.400	54.92	-0.77	54.15	74.00	-19.85	peak
6	4999.400	43.61	-0.77	42.84	54.00	-11.16	AVG
7	5035.700	54.83	-0.70	54.13	74.00	-19.87	peak
8	5035.700	44.06	-0.70	43.36	54.00	-10.64	AVG
9	5122.600	55.61	-0.53	55.08	74.00	-18.92	peak
10	5122.600	45.26	-0.53	44.73	54.00	-9.27	AVG
11	5134.700	56.82	-0.51	56.31	74.00	-17.69	peak
12	5134.700	46.05	-0.51	45.54	54.00	-8.46	AVG
13	5140.200	58.06	-0.49	57.57	74.00	-16.43	peak
14	5140.200	47.35	-0.49	46.86	54.00	-7.14	AVG
15	5150.000	61.31	-0.48	60.83	74.00	-13.17	peak
16	5150.000	50.65	-0.48	50.17	54.00	-3.83	AVG
17	5232.600	108.50	-0.31	108.19	--	--	peak
18	5350.000	50.75	-0.08	50.67	74.00	-23.33	peak
19	5355.800	53.06	-0.07	52.99	74.00	-21.01	peak
20	5355.800	41.86	-0.07	41.79	54.00	-12.21	AVG
21	5433.900	52.25	0.09	52.34	74.00	-21.66	peak
22	5433.900	40.42	0.09	40.51	54.00	-13.49	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5270 MHz		
Mode:	Mode 14		
Ant.Polar.:	Horizontal		

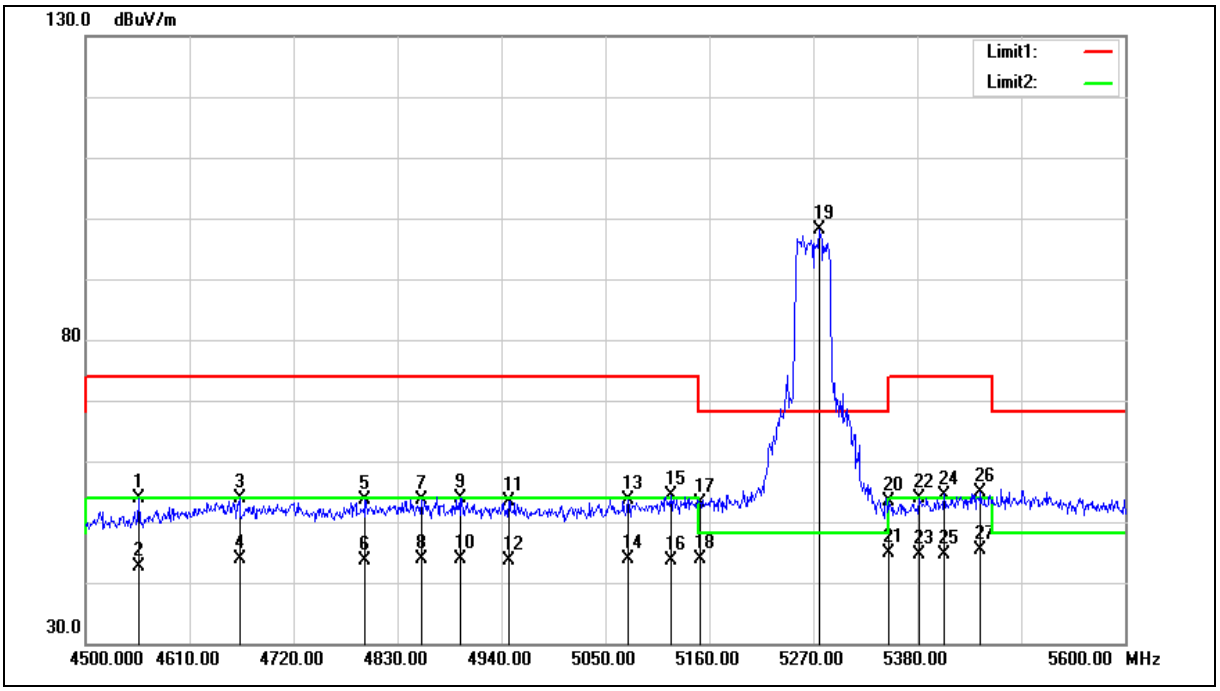

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5270 MHz		
Mode:	Mode 14		
Ant.Polar.:	Horizontal		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4556.100	50.24	3.62	53.86	74.00	-20.14	peak
2	4556.100	39.11	3.62	42.73	54.00	-11.27	AVG
3	4662.800	50.06	3.89	53.95	74.00	-20.05	peak
4	4662.800	39.90	3.89	43.79	54.00	-10.21	AVG
5	4795.900	49.30	4.23	53.53	74.00	-20.47	peak
6	4795.900	39.39	4.23	43.62	54.00	-10.38	AVG
7	4855.300	49.26	4.39	53.65	74.00	-20.35	peak
8	4855.300	39.38	4.39	43.77	54.00	-10.23	AVG
9	4897.100	49.29	4.50	53.79	74.00	-20.21	peak
10	4897.100	39.45	4.50	43.95	54.00	-10.05	AVG
11	4947.700	48.83	4.62	53.45	74.00	-20.55	peak
12	4947.700	39.02	4.62	43.64	54.00	-10.36	AVG
13	5074.200	48.70	4.93	53.63	74.00	-20.37	peak
14	5074.200	39.06	4.93	43.99	54.00	-10.01	AVG
15	5119.300	49.27	5.04	54.31	74.00	-19.69	peak
16	5119.300	38.59	5.04	43.63	54.00	-10.37	AVG
17	5150.000	47.96	5.12	53.08	74.00	-20.92	peak
18	5150.000	38.76	5.12	43.88	54.00	-10.12	AVG
19	5276.600	92.79	5.43	98.22	--	--	peak
20	5350.000	47.65	5.61	53.26	74.00	-20.74	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5270 MHz		
Mode:	Mode 14		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
21	5350.000	39.20	5.61	44.81	54.00	-9.19	AVG
22	5382.200	48.29	5.69	53.98	74.00	-20.02	peak
23	5382.200	39.05	5.69	44.74	54.00	-9.26	AVG
24	5408.600	48.74	5.76	54.50	74.00	-19.50	peak
25	5408.600	38.88	5.76	44.64	54.00	-9.36	AVG
26	5447.100	49.07	5.84	54.91	74.00	-19.09	peak
27	5447.100	39.46	5.84	45.30	54.00	-8.70	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5270 MHz		
Mode:	Mode 14		
Ant.Polar.:	Vertical		

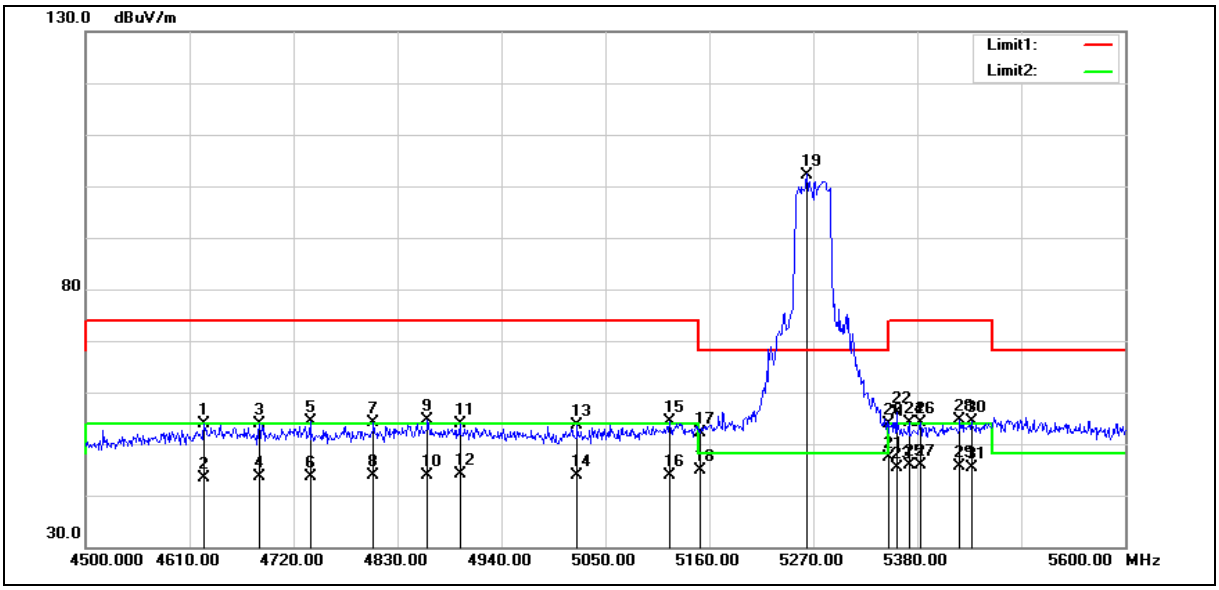

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5270 MHz		
Mode:	Mode 14		
Ant.Polar.:	Vertical		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4625.400	50.17	3.80	53.97	74.00	-20.03	peak
2	4625.400	39.67	3.80	43.47	54.00	-10.53	AVG
3	4683.700	49.90	3.94	53.84	74.00	-20.16	peak
4	4683.700	39.60	3.94	43.54	54.00	-10.46	AVG
5	4737.600	50.33	4.09	54.42	74.00	-19.58	peak
6	4737.600	39.59	4.09	43.68	54.00	-10.32	AVG
7	4804.700	49.88	4.25	54.13	74.00	-19.87	peak
8	4804.700	39.71	4.25	43.96	54.00	-10.04	AVG
9	4861.900	50.15	4.40	54.55	74.00	-19.45	peak
10	4861.900	39.51	4.40	43.91	54.00	-10.09	AVG
11	4896.000	49.43	4.49	53.92	74.00	-20.08	peak
12	4896.000	39.61	4.49	44.10	54.00	-9.90	AVG
13	5020.300	48.72	4.81	53.53	74.00	-20.47	peak
14	5020.300	38.95	4.81	43.76	54.00	-10.24	AVG
15	5118.200	49.25	5.03	54.28	74.00	-19.72	peak
16	5118.200	38.80	5.03	43.83	54.00	-10.17	AVG
17	5150.000	47.13	5.12	52.25	74.00	-21.75	peak
18	5150.000	39.70	5.12	44.82	54.00	-9.18	AVG
19	5263.400	96.86	5.39	102.25	--	--	peak
20	5350.000	48.18	5.61	53.79	74.00	-20.21	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5270 MHz		
Mode:	Mode 14		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
21	5350.000	41.89	5.61	47.50	54.00	-6.50	AVG
22	5358.000	50.55	5.63	56.18	74.00	-17.82	peak
23	5358.000	39.80	5.63	45.43	54.00	-8.57	AVG
24	5371.200	48.37	5.66	54.03	74.00	-19.97	peak
25	5371.200	40.14	5.66	45.80	54.00	-8.20	AVG
26	5383.300	48.44	5.69	54.13	74.00	-19.87	peak
27	5383.300	40.19	5.69	45.88	54.00	-8.12	AVG
28	5425.100	48.82	5.80	54.62	74.00	-19.38	peak
29	5425.100	39.82	5.80	45.62	54.00	-8.38	AVG
30	5437.200	48.51	5.82	54.33	74.00	-19.67	peak
31	5437.200	39.50	5.82	45.32	54.00	-8.68	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5310 MHz		
Mode:	Mode 14		
Ant.Polar.:	Horizontal		

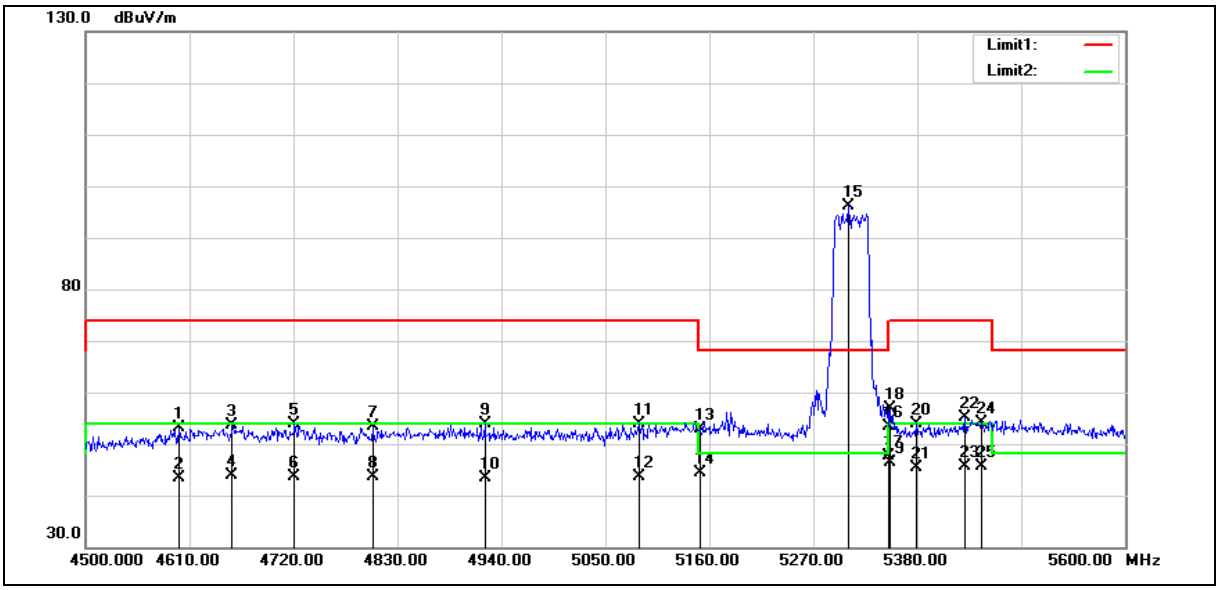

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5310 MHz		
Mode:	Mode 14		
Ant.Polar.:	Horizontal		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4599.000	49.35	3.73	53.08	74.00	-20.92	peak
2	4599.000	39.68	3.73	43.41	54.00	-10.59	AVG
3	4655.100	49.84	3.88	53.72	74.00	-20.28	peak
4	4655.100	40.01	3.88	43.89	54.00	-10.11	AVG
5	4721.100	49.97	4.03	54.00	74.00	-20.00	peak
6	4721.100	39.55	4.03	43.58	54.00	-10.42	AVG
7	4803.600	49.05	4.25	53.30	74.00	-20.70	peak
8	4803.600	39.47	4.25	43.72	54.00	-10.28	AVG
9	4922.400	49.37	4.56	53.93	74.00	-20.07	peak
10	4922.400	38.87	4.56	43.43	54.00	-10.57	AVG
11	5086.300	49.01	4.97	53.98	74.00	-20.02	peak
12	5086.300	38.77	4.97	43.74	54.00	-10.26	AVG
13	5150.000	47.68	5.12	52.80	74.00	-21.20	peak
14	5150.000	39.23	5.12	44.35	54.00	-9.65	AVG
15	5307.400	90.75	5.50	96.25	--	--	peak
16	5350.000	47.69	5.61	53.30	74.00	-20.70	peak
17	5350.000	42.03	5.61	47.64	54.00	-6.36	AVG
18	5351.400	51.38	5.61	56.99	74.00	-17.01	peak
19	5351.400	40.82	5.61	46.43	54.00	-7.57	AVG
20	5378.900	48.28	5.67	53.95	74.00	-20.05	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5310 MHz		
Mode:	Mode 14		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
21	5378.900	39.71	5.67	45.38	54.00	-8.62	AVG
22	5430.600	49.38	5.81	55.19	74.00	-18.81	peak
23	5430.600	39.88	5.81	45.69	54.00	-8.31	AVG
24	5448.200	48.29	5.85	54.14	74.00	-19.86	peak
25	5448.200	39.86	5.85	45.71	54.00	-8.29	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5310 MHz		
Mode:	Mode 14		
Ant.Polar.:	Vertical		

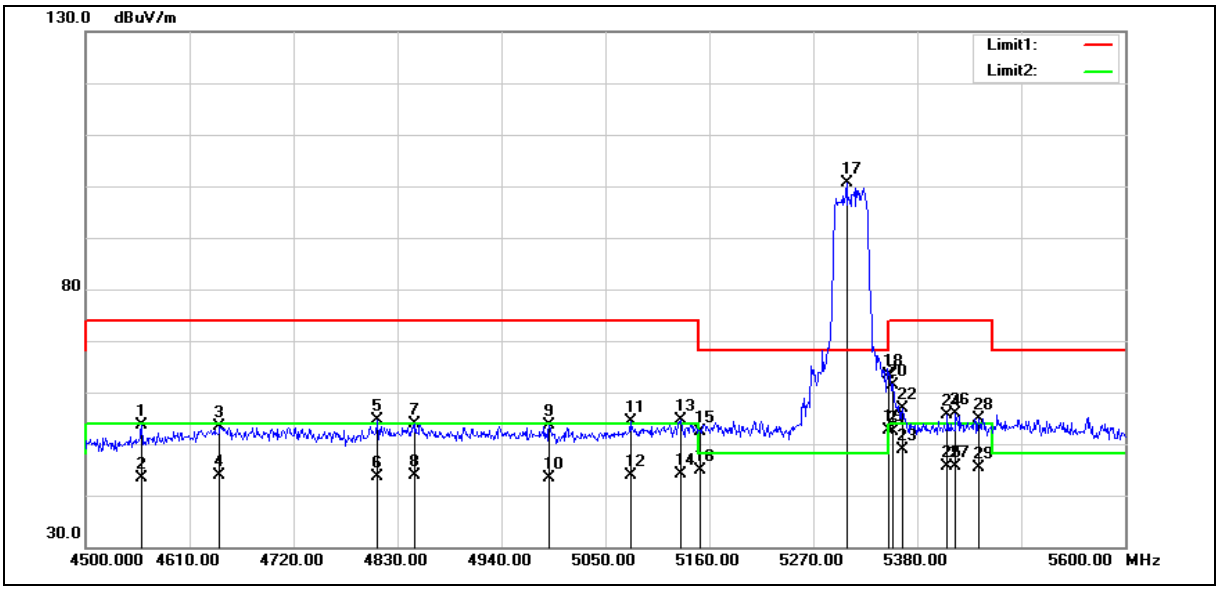

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5310 MHz		
Mode:	Mode 14		
Ant.Polar.:	Vertical		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4559.400	49.90	3.63	53.53	74.00	-20.47	peak
2	4559.400	39.75	3.63	43.38	54.00	-10.62	AVG
3	4641.900	49.58	3.84	53.42	74.00	-20.58	peak
4	4641.900	40.02	3.84	43.86	54.00	-10.14	AVG
5	4809.100	50.44	4.26	54.70	74.00	-19.30	peak
6	4809.100	39.39	4.26	43.65	54.00	-10.35	AVG
7	4848.700	49.41	4.36	53.77	74.00	-20.23	peak
8	4848.700	39.60	4.36	43.96	54.00	-10.04	AVG
9	4990.600	48.87	4.72	53.59	74.00	-20.41	peak
10	4990.600	38.77	4.72	43.49	54.00	-10.51	AVG
11	5076.400	49.34	4.94	54.28	74.00	-19.72	peak
12	5076.400	38.83	4.94	43.77	54.00	-10.23	AVG
13	5129.200	49.57	5.06	54.63	74.00	-19.37	peak
14	5129.200	39.16	5.06	44.22	54.00	-9.78	AVG
15	5150.000	47.18	5.12	52.30	74.00	-21.70	peak
16	5150.000	39.67	5.12	44.79	54.00	-9.21	AVG
17	5305.200	95.12	5.49	100.61	--	--	peak
18	5350.000	57.65	5.61	63.26	74.00	-10.74	peak
19	5350.000	47.07	5.61	52.68	54.00	-1.32	AVG
20	5354.700	55.74	5.62	61.36	74.00	-12.64	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5310 MHz		
Mode:	Mode 14		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
21	5354.700	46.77	5.62	52.39	54.00	-1.61	AVG
22	5364.600	51.34	5.65	56.99	74.00	-17.01	peak
23	5364.600	43.22	5.65	48.87	54.00	-5.13	AVG
24	5411.900	49.78	5.76	55.54	74.00	-18.46	peak
25	5411.900	39.76	5.76	45.52	54.00	-8.48	AVG
26	5420.700	49.97	5.79	55.76	74.00	-18.24	peak
27	5420.700	39.79	5.79	45.58	54.00	-8.42	AVG
28	5444.900	48.96	5.84	54.80	74.00	-19.20	peak
29	5444.900	39.45	5.84	45.29	54.00	-8.71	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5510 MHz		
Mode:	Mode 14		
Ant.Polar.:	Horizontal		

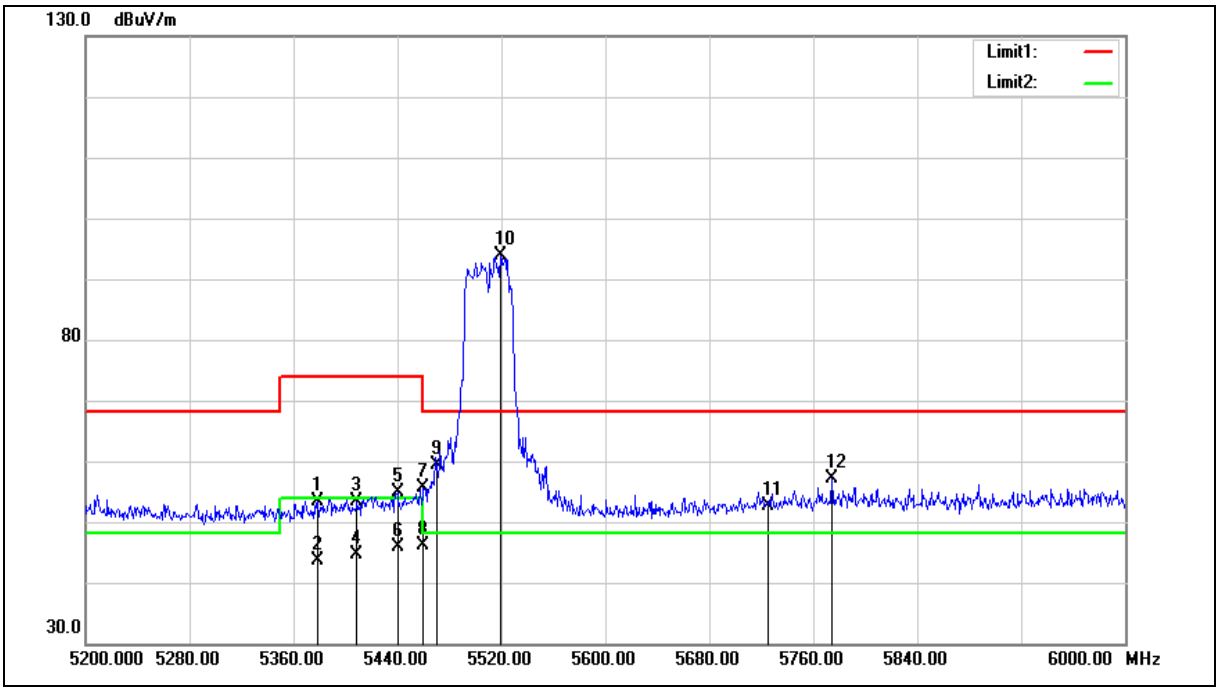

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5510 MHz		
Mode:	Mode 14		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5378.400	47.70	5.67	53.37	74.00	-20.63	peak
2	5378.400	38.06	5.67	43.73	54.00	-10.27	AVG
3	5408.800	47.67	5.76	53.43	74.00	-20.57	peak
4	5408.800	38.88	5.76	44.64	54.00	-9.36	AVG
5	5440.000	49.04	5.82	54.86	74.00	-19.14	peak
6	5440.000	40.14	5.82	45.96	54.00	-8.04	AVG
7	5460.000	49.68	5.88	55.56	74.00	-18.44	peak
8	5460.000	40.36	5.88	46.24	54.00	-7.76	AVG
9	5470.000	53.51	5.91	59.42	68.20	-8.78	peak
10	5519.200	87.97	6.02	93.99	--	--	peak
11	5725.000	46.11	6.47	52.58	68.20	-15.62	peak
12	5774.400	50.46	6.58	57.04	68.20	-11.16	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5510 MHz		
Mode:	Mode 14		
Ant.Polar.:	Vertical		

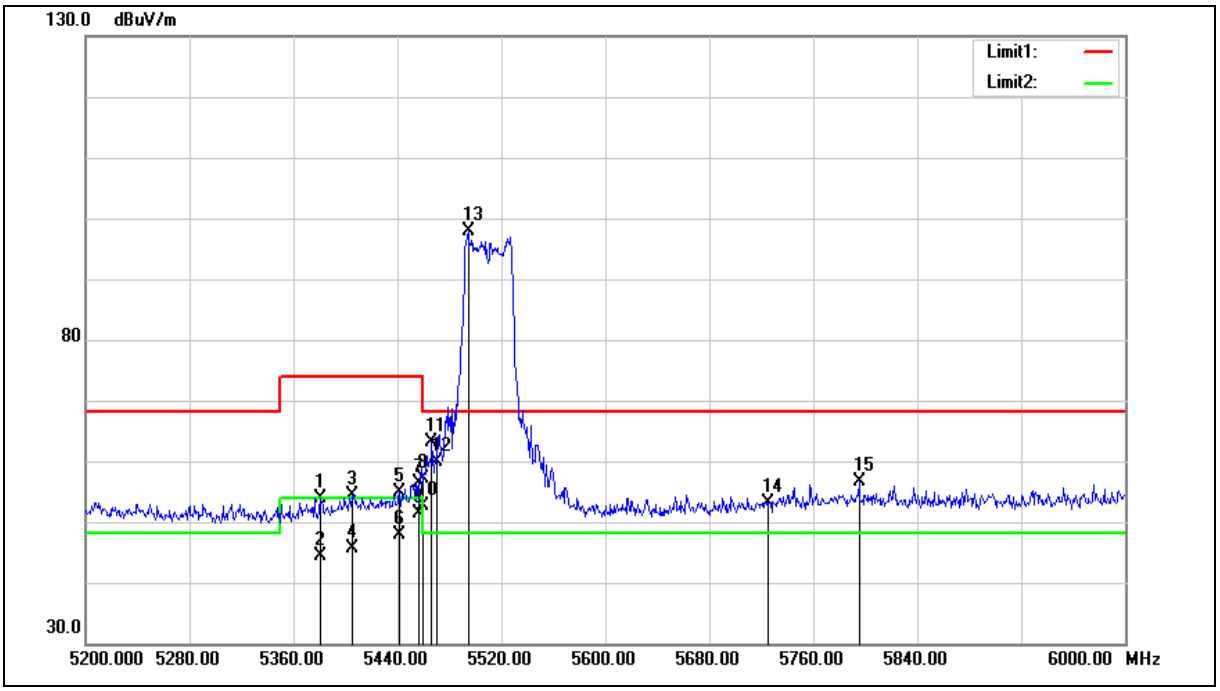

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5510 MHz		
Mode:	Mode 14		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5380.800	48.27	5.68	53.95	74.00	-20.05	peak
2	5380.800	38.65	5.68	44.33	54.00	-9.67	AVG
3	5405.600	48.53	5.74	54.27	74.00	-19.73	peak
4	5405.600	39.90	5.74	45.64	54.00	-8.36	AVG
5	5441.600	49.13	5.82	54.95	74.00	-19.05	peak
6	5441.600	42.06	5.82	47.88	54.00	-6.12	AVG
7	5456.800	50.55	5.87	56.42	74.00	-17.58	peak
8	5456.800	45.56	5.87	51.43	54.00	-2.57	AVG
9	5460.000	51.33	5.88	57.21	74.00	-16.79	peak
10	5460.000	46.70	5.88	52.58	54.00	-1.42	AVG
11	5466.400	57.31	5.89	63.20	68.20	-5.00	peak
12	5470.000	53.96	5.91	59.87	68.20	-8.33	peak
13	5494.400	91.87	5.97	97.84	--	--	peak
14	5725.000	46.72	6.47	53.19	68.20	-15.01	peak
15	5795.200	49.91	6.63	56.54	68.20	-11.66	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5550 MHz		
Mode:	Mode 14		
Ant.Polar.:	Horizontal		

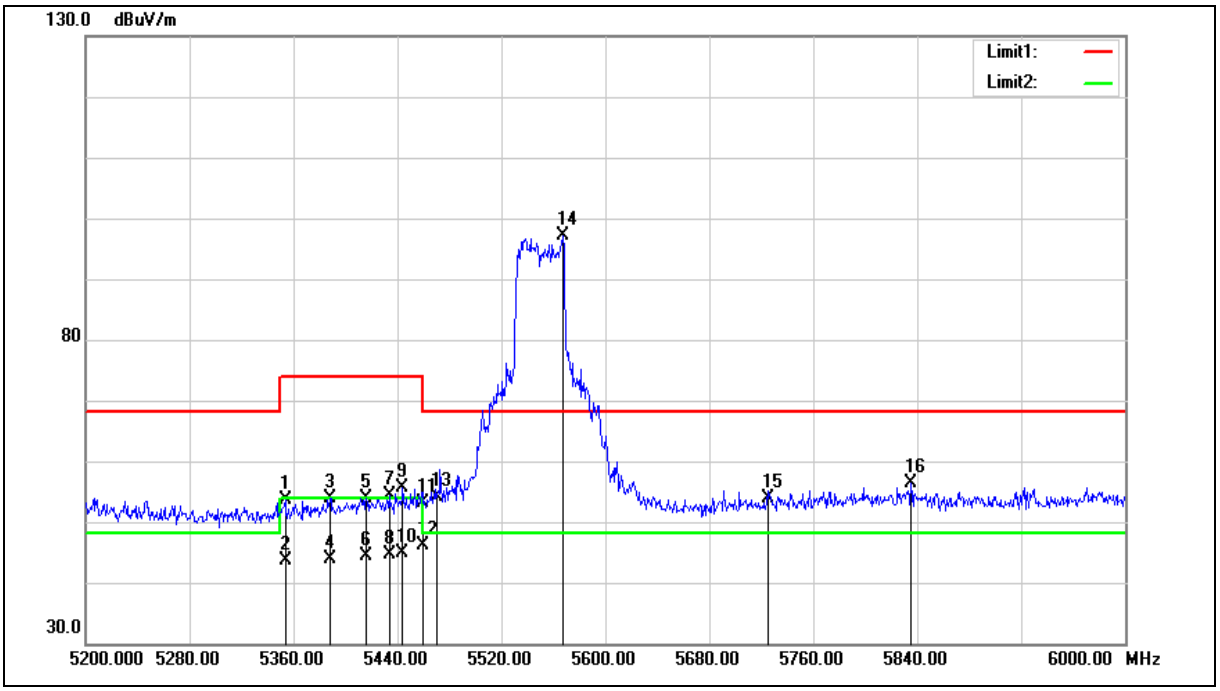

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5550 MHz		
Mode:	Mode 14		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5353.600	47.97	5.62	53.59	74.00	-20.41	peak
2	5353.600	37.99	5.62	43.61	54.00	-10.39	AVG
3	5388.000	48.26	5.70	53.96	74.00	-20.04	peak
4	5388.000	38.15	5.70	43.85	54.00	-10.15	AVG
5	5416.000	48.04	5.77	53.81	74.00	-20.19	peak
6	5416.000	38.64	5.77	44.41	54.00	-9.59	AVG
7	5433.600	48.61	5.81	54.42	74.00	-19.58	peak
8	5433.600	38.77	5.81	44.58	54.00	-9.42	AVG
9	5444.000	49.76	5.84	55.60	74.00	-18.40	peak
10	5444.000	38.95	5.84	44.79	54.00	-9.21	AVG
11	5460.000	47.36	5.88	53.24	74.00	-20.76	peak
12	5460.000	40.25	5.88	46.13	54.00	-7.87	AVG
13	5470.000	48.25	5.91	54.16	68.20	-14.04	peak
14	5567.200	91.08	6.12	97.20	--	--	peak
15	5725.000	47.37	6.47	53.84	68.20	-14.36	peak
16	5835.200	49.59	6.72	56.31	68.20	-11.89	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5550 MHz		
Mode:	Mode 14		
Ant.Polar.:	Vertical		

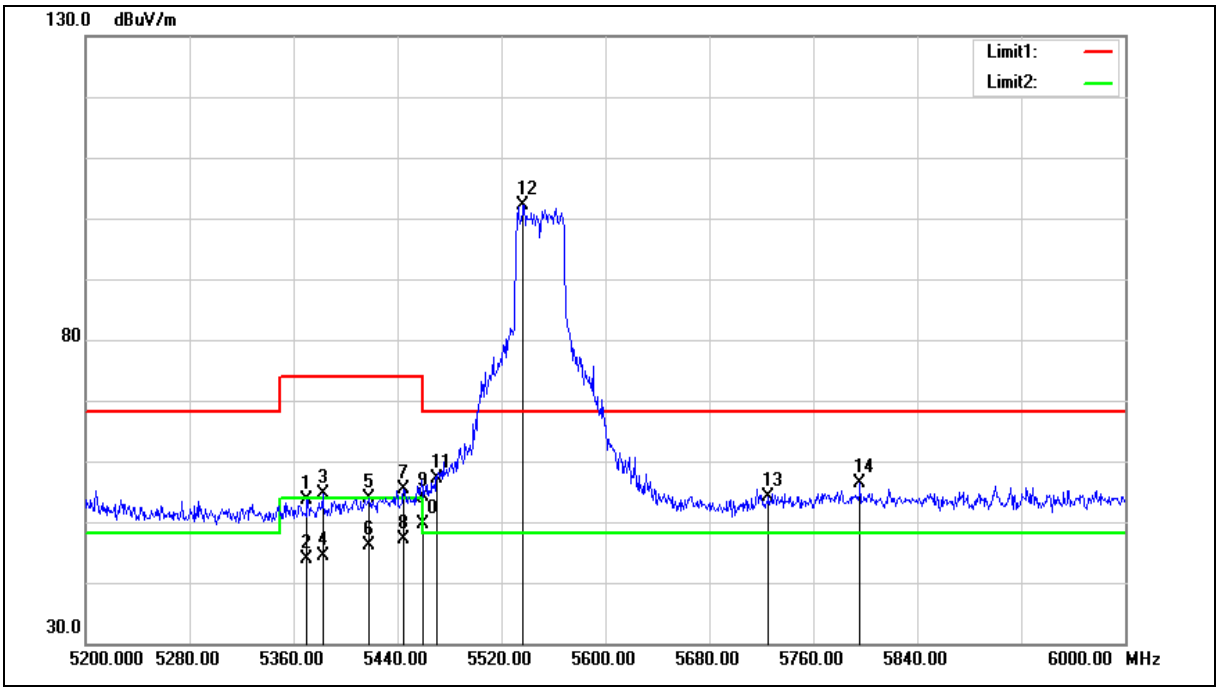

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5550 MHz		
Mode:	Mode 14		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5370.400	47.92	5.66	53.58	74.00	-20.42	peak
2	5370.400	38.12	5.66	43.78	54.00	-10.22	AVG
3	5382.400	48.86	5.69	54.55	74.00	-19.45	peak
4	5382.400	38.70	5.69	44.39	54.00	-9.61	AVG
5	5418.400	48.09	5.77	53.86	74.00	-20.14	peak
6	5418.400	40.36	5.77	46.13	54.00	-7.87	AVG
7	5444.800	49.50	5.84	55.34	74.00	-18.66	peak
8	5444.800	41.35	5.84	47.19	54.00	-6.81	AVG
9	5460.000	48.29	5.88	54.17	74.00	-19.83	peak
10	5460.000	43.63	5.88	49.51	54.00	-4.49	AVG
11	5470.000	51.18	5.91	57.09	68.20	-11.11	peak
12	5536.800	96.14	6.06	102.20	--	--	peak
13	5725.000	47.55	6.47	54.02	68.20	-14.18	peak
14	5796.000	49.68	6.63	56.31	68.20	-11.89	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5670 MHz		
Mode:	Mode 14		
Ant.Polar.:	Horizontal		

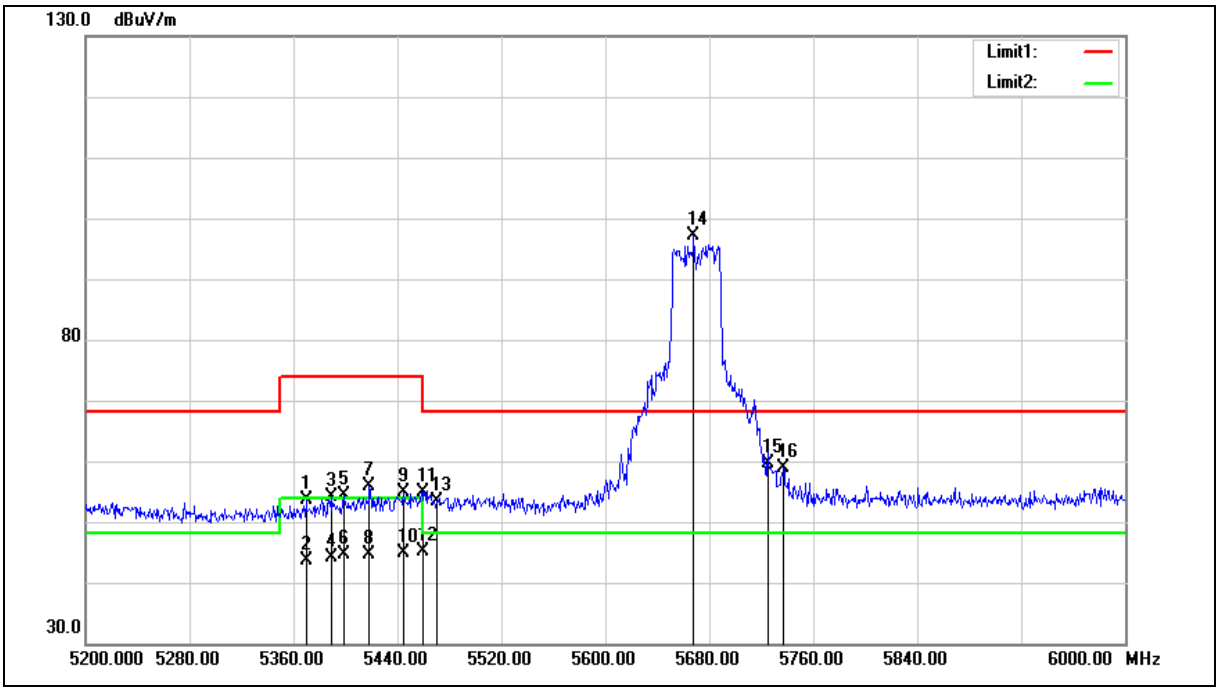

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5670 MHz		
Mode:	Mode 14		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5369.600	48.01	5.66	53.67	74.00	-20.33	peak
2	5369.600	37.99	5.66	43.65	54.00	-10.35	AVG
3	5388.800	48.32	5.70	54.02	74.00	-19.98	peak
4	5388.800	38.52	5.70	44.22	54.00	-9.78	AVG
5	5398.400	48.71	5.73	54.44	74.00	-19.56	peak
6	5398.400	38.81	5.73	44.54	54.00	-9.46	AVG
7	5418.400	50.15	5.77	55.92	74.00	-18.08	peak
8	5418.400	38.85	5.77	44.62	54.00	-9.38	AVG
9	5444.800	49.08	5.84	54.92	74.00	-19.08	peak
10	5444.800	39.14	5.84	44.98	54.00	-9.02	AVG
11	5460.000	48.98	5.88	54.86	74.00	-19.14	peak
12	5460.000	39.26	5.88	45.14	54.00	-8.86	AVG
13	5470.000	47.45	5.91	53.36	68.20	-14.84	peak
14	5668.000	90.73	6.35	97.08	--	--	peak
15	5725.000	53.06	6.47	59.53	68.20	-8.67	peak
16	5736.800	52.41	6.50	58.91	68.20	-9.29	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5670 MHz		
Mode:	Mode 14		
Ant.Polar.:	Vertical		

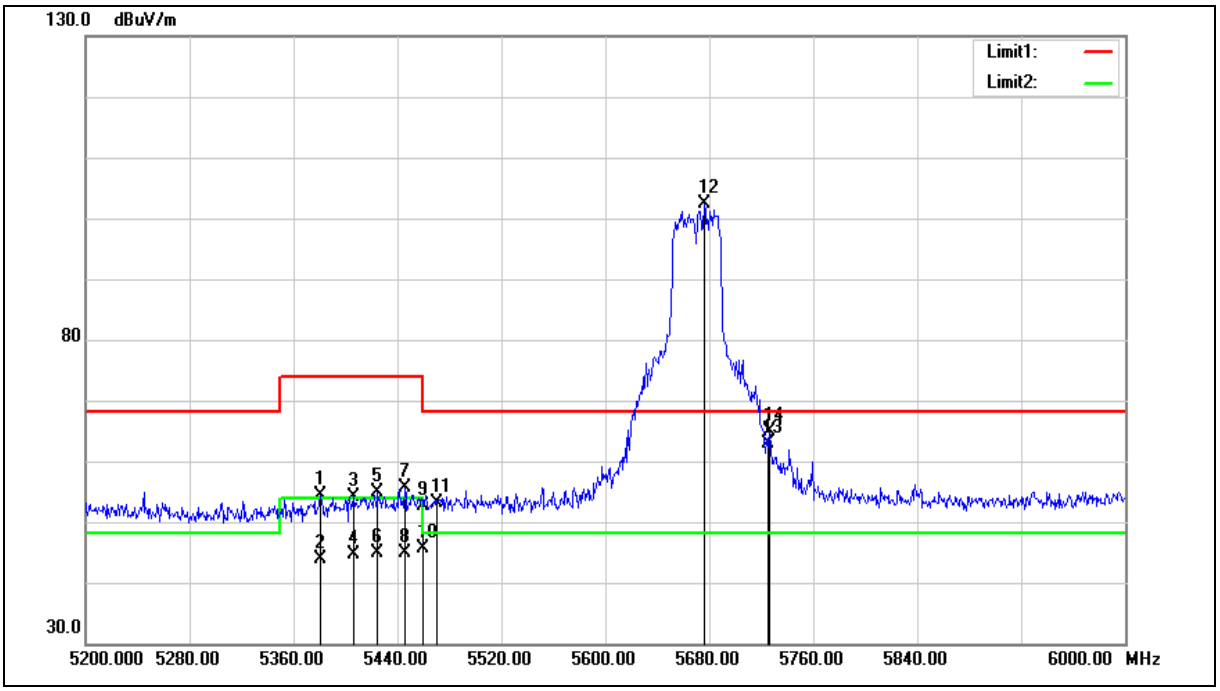

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5670 MHz		
Mode:	Mode 14		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5380.800	48.70	5.68	54.38	74.00	-19.62	peak
2	5380.800	38.18	5.68	43.86	54.00	-10.14	AVG
3	5406.400	48.36	5.75	54.11	74.00	-19.89	peak
4	5406.400	38.81	5.75	44.56	54.00	-9.44	AVG
5	5424.800	49.18	5.79	54.97	74.00	-19.03	peak
6	5424.800	39.16	5.79	44.95	54.00	-9.05	AVG
7	5445.600	49.75	5.84	55.59	74.00	-18.41	peak
8	5445.600	39.08	5.84	44.92	54.00	-9.08	AVG
9	5460.000	46.72	5.88	52.60	74.00	-21.40	peak
10	5460.000	39.64	5.88	45.52	54.00	-8.48	AVG
11	5470.000	47.11	5.91	53.02	68.20	-15.18	peak
12	5676.000	96.09	6.37	102.46	--	--	peak
13	5725.000	56.45	6.47	62.92	68.20	-5.28	peak
14	5726.400	58.52	6.48	65.00	68.20	-3.20	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5755 MHz		
Mode:	Mode 14		
Ant.Polar.:	Horizontal		

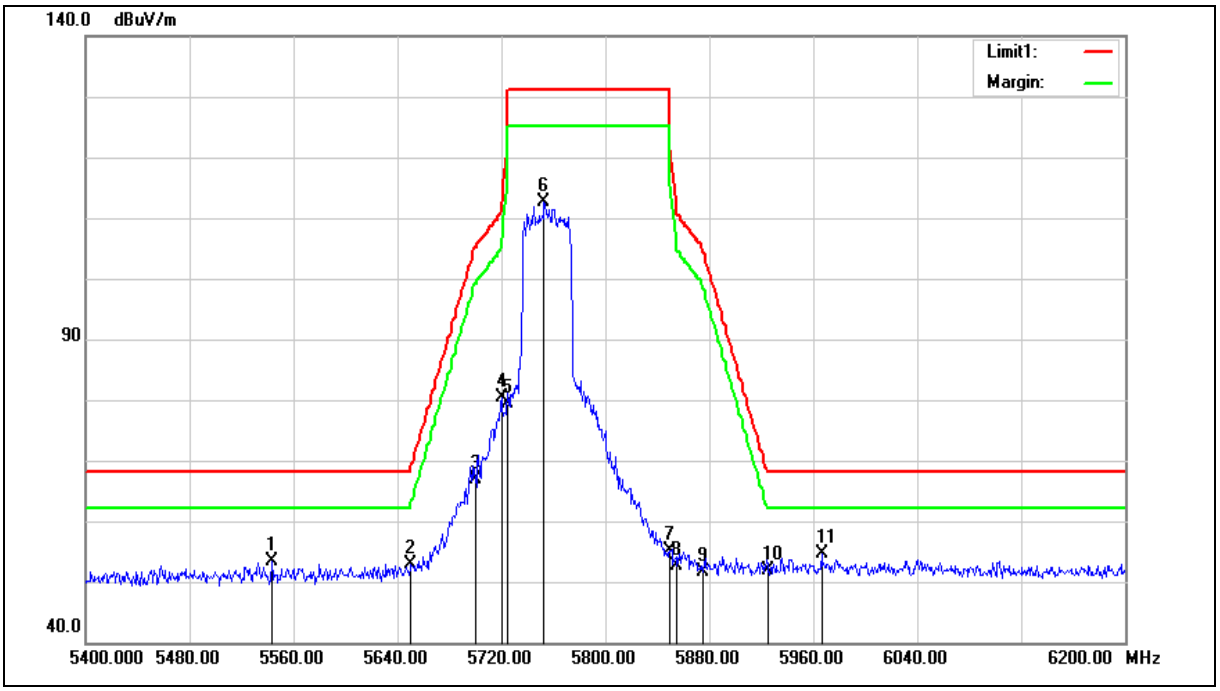

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5755 MHz		
Mode:	Mode 14		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5543.200	53.06	0.33	53.39	68.20	-14.81	peak
2	5650.000	52.25	0.62	52.87	68.20	-15.33	peak
3	5700.000	66.07	0.75	66.82	105.20	-38.38	peak
4	5720.000	79.45	0.81	80.26	110.80	-30.54	peak
5	5725.000	78.53	0.82	79.35	122.20	-42.85	peak
6	5752.800	111.84	0.90	112.74	--	--	peak
7	5850.000	53.96	1.17	55.13	122.20	-67.07	peak
8	5855.000	51.54	1.18	52.72	110.80	-58.08	peak
9	5875.000	50.31	1.23	51.54	105.20	-53.66	peak
10	5925.000	50.39	1.37	51.76	68.20	-16.44	peak
11	5966.400	53.16	1.49	54.65	68.20	-13.55	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5755 MHz		
Mode:	Mode 14		
Ant.Polar.:	Vertical		

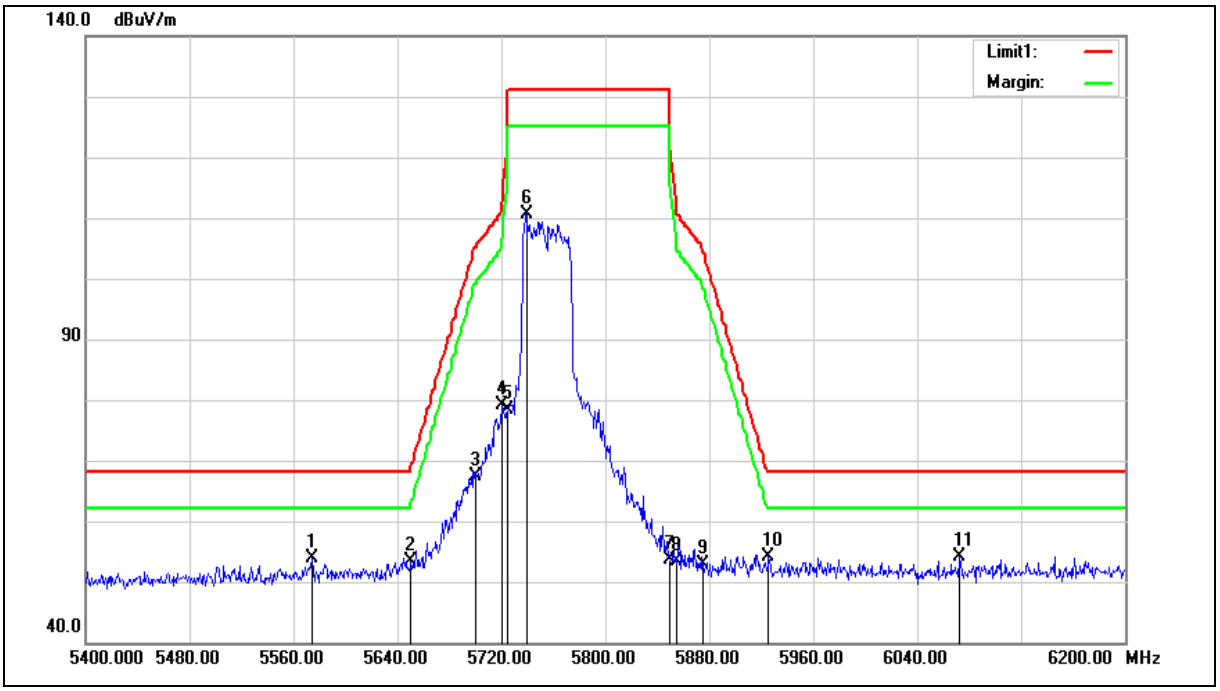

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5755 MHz		
Mode:	Mode 14		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5574.400	53.42	0.42	53.84	68.20	-14.36	peak
2	5650.000	52.78	0.62	53.40	68.20	-14.80	peak
3	5700.000	66.55	0.75	67.30	105.20	-37.90	peak
4	5720.000	78.35	0.81	79.16	110.80	-31.64	peak
5	5725.000	77.59	0.82	78.41	122.20	-43.79	peak
6	5739.200	109.73	0.86	110.59	--	--	peak
7	5850.000	52.48	1.17	53.65	122.20	-68.55	peak
8	5855.000	52.25	1.18	53.43	110.80	-57.37	peak
9	5875.000	51.57	1.23	52.80	105.20	-52.40	peak
10	5925.000	52.71	1.37	54.08	68.20	-14.12	peak
11	6072.800	52.24	1.82	54.06	68.20	-14.14	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5795 MHz		
Mode:	Mode 14		
Ant.Polar.:	Horizontal		

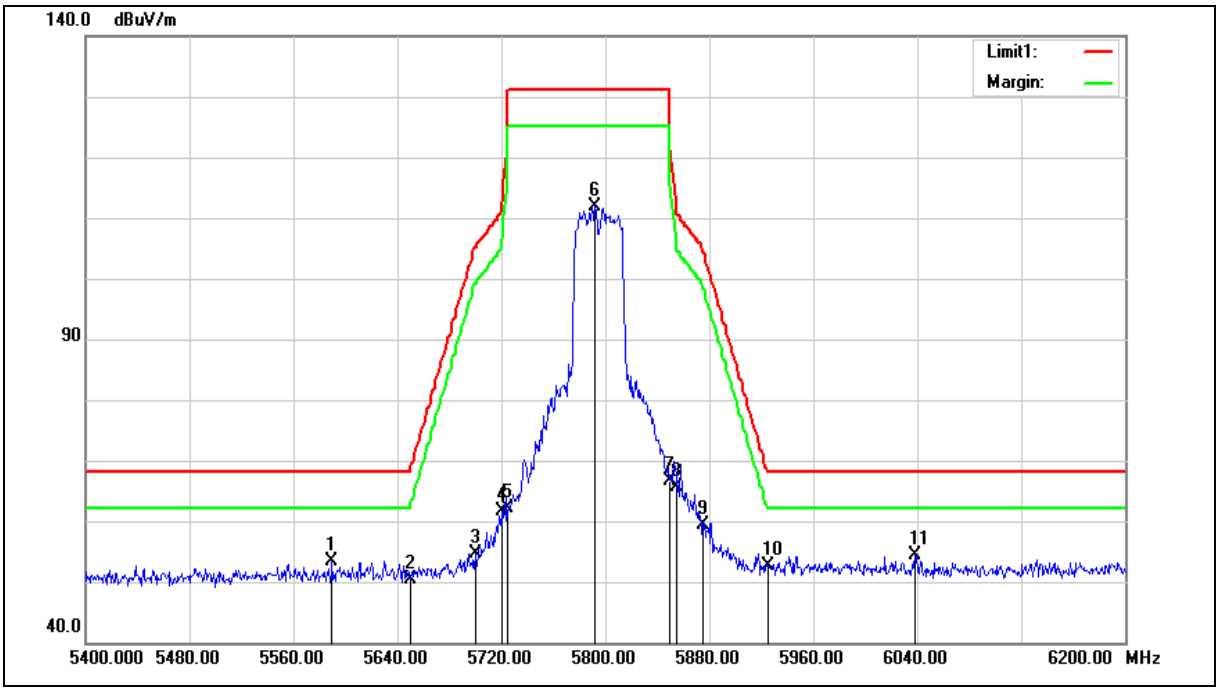

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5795 MHz		
Mode:	Mode 14		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5589.600	53.01	0.46	53.47	68.20	-14.73	peak
2	5650.000	49.70	0.62	50.32	68.20	-17.88	peak
3	5700.000	53.90	0.75	54.65	105.20	-50.55	peak
4	5720.000	60.79	0.81	61.60	110.80	-49.20	peak
5	5725.000	61.31	0.82	62.13	122.20	-60.07	peak
6	5792.000	110.86	1.01	111.87	--	--	peak
7	5850.000	65.47	1.17	66.64	122.20	-55.56	peak
8	5855.000	64.40	1.18	65.58	110.80	-45.22	peak
9	5875.000	58.20	1.23	59.43	105.20	-45.77	peak
10	5925.000	51.24	1.37	52.61	68.20	-15.59	peak
11	6038.400	52.55	1.71	54.26	68.20	-13.94	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5795 MHz		
Mode:	Mode 14		
Ant.Polar.:	Vertical		

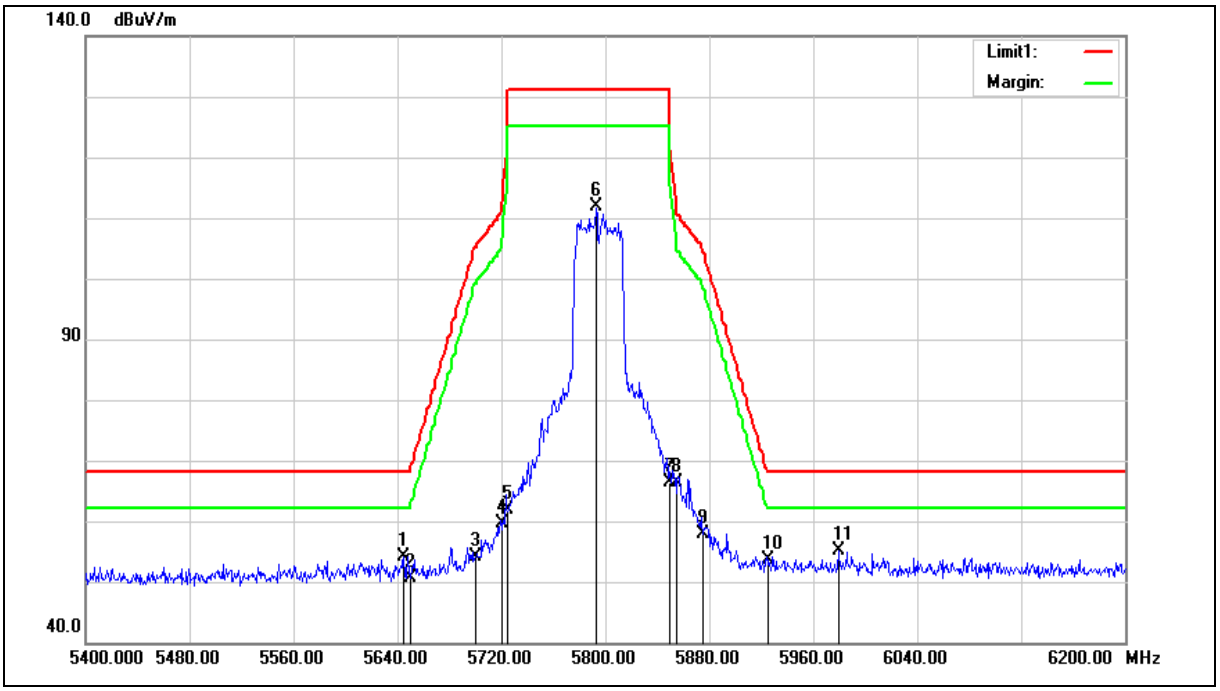

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5795 MHz		
Mode:	Mode 14		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5644.800	53.42	0.60	54.02	68.20	-14.18	peak
2	5650.000	50.10	0.62	50.72	68.20	-17.48	peak
3	5700.000	53.38	0.75	54.13	105.20	-51.07	peak
4	5720.000	58.80	0.81	59.61	110.80	-51.19	peak
5	5725.000	61.02	0.82	61.84	122.20	-60.36	peak
6	5792.800	110.94	1.01	111.95	--	--	peak
7	5850.000	65.27	1.17	66.44	122.20	-55.76	peak
8	5855.000	65.32	1.18	66.50	110.80	-44.30	peak
9	5875.000	56.69	1.23	57.92	105.20	-47.28	peak
10	5925.000	52.14	1.37	53.51	68.20	-14.69	peak
11	5979.200	53.65	1.52	55.17	68.20	-13.03	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5210 MHz		
Mode:	Mode 15		
Ant.Polar.:	Horizontal		

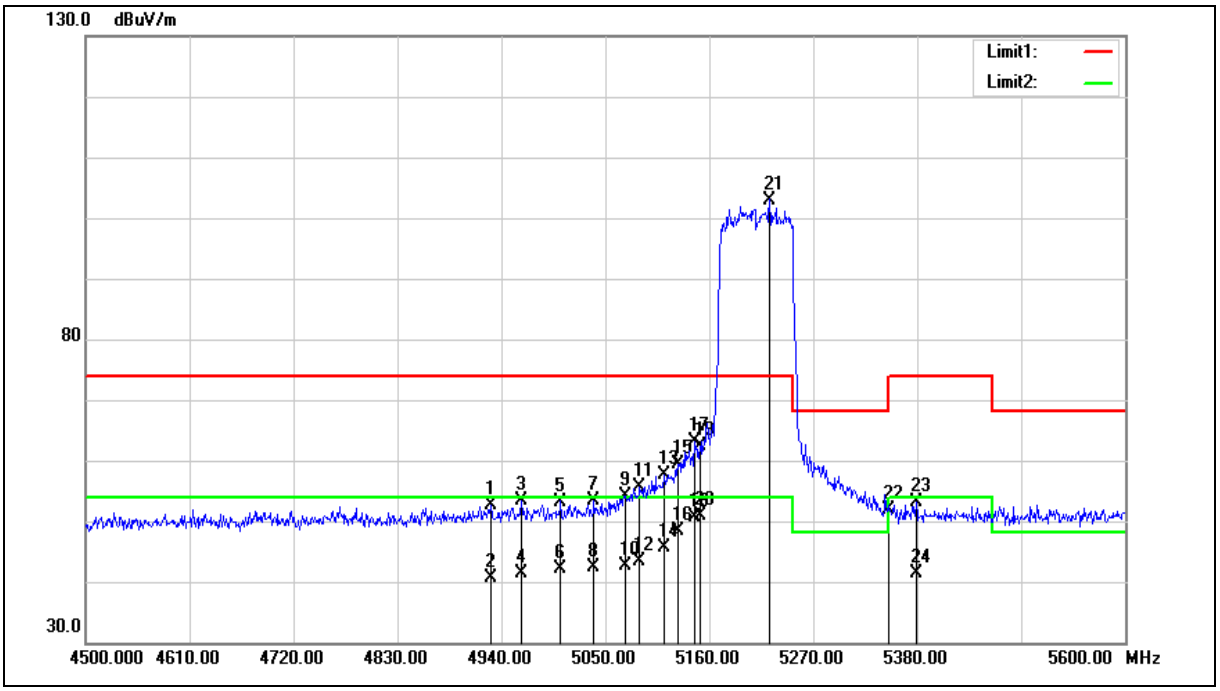

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5210 MHz		
Mode:	Mode 15		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4929.000	53.65	-0.96	52.69	74.00	-21.31	peak
2	4929.000	41.69	-0.96	40.73	54.00	-13.27	AVG
3	4960.900	54.25	-0.88	53.37	74.00	-20.63	peak
4	4960.900	42.36	-0.88	41.48	54.00	-12.52	AVG
5	5002.700	54.02	-0.77	53.25	74.00	-20.75	peak
6	5002.700	42.82	-0.77	42.05	54.00	-11.95	AVG
7	5037.900	54.18	-0.69	53.49	74.00	-20.51	peak
8	5037.900	43.11	-0.69	42.42	54.00	-11.58	AVG
9	5070.900	54.88	-0.63	54.25	74.00	-19.75	peak
10	5070.900	43.24	-0.63	42.61	54.00	-11.39	AVG
11	5086.300	56.31	-0.60	55.71	74.00	-18.29	peak
12	5086.300	44.07	-0.60	43.47	54.00	-10.53	AVG
13	5112.700	58.15	-0.55	57.60	74.00	-16.40	peak
14	5112.700	46.14	-0.55	45.59	54.00	-8.41	AVG
15	5127.000	59.92	-0.52	59.40	74.00	-14.60	peak
16	5127.000	48.99	-0.52	48.47	54.00	-5.53	AVG
17	5144.600	63.49	-0.48	63.01	74.00	-10.99	peak
18	5144.600	51.08	-0.48	50.60	54.00	-3.40	AVG
19	5150.000	62.86	-0.48	62.38	74.00	-11.62	peak
20	5150.000	51.32	-0.48	50.84	54.00	-3.16	AVG
21	5223.800	103.28	-0.33	102.95	--	--	peak
22	5350.000	51.93	-0.08	51.85	74.00	-22.15	peak
23	5378.900	53.11	-0.03	53.08	74.00	-20.92	peak
24	5378.900	41.31	-0.03	41.28	54.00	-12.72	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5210 MHz		
Mode:	Mode 15		
Ant.Polar.:	Vertical		

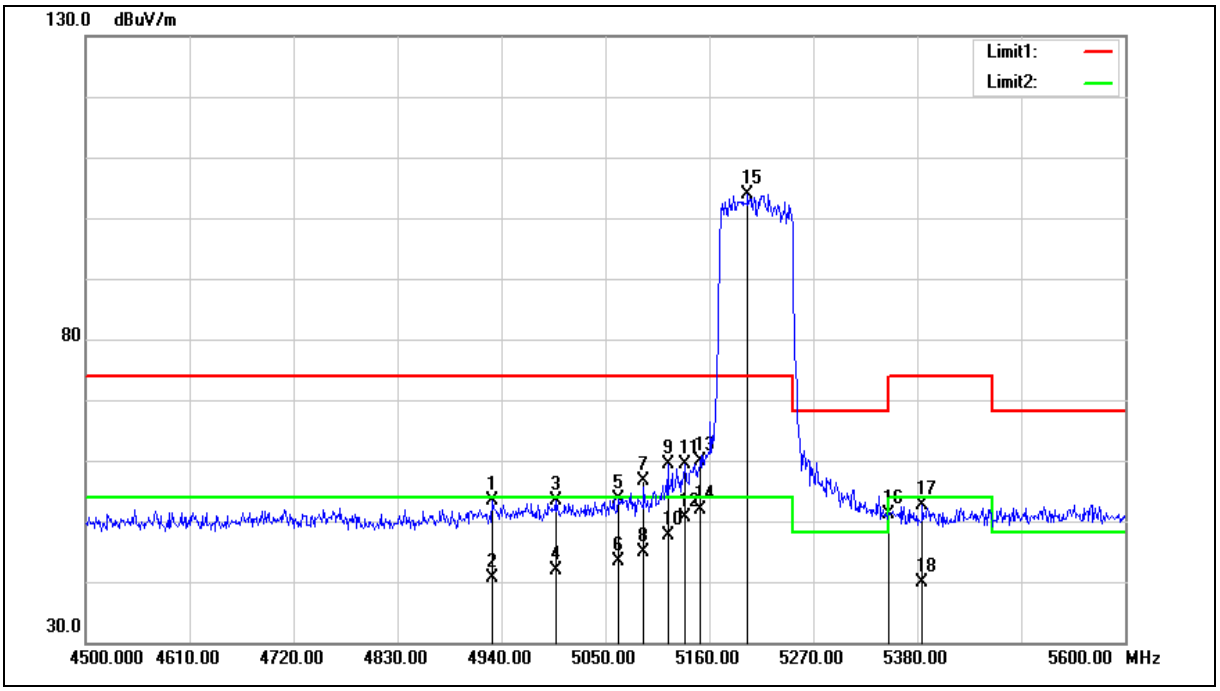

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5210 MHz		
Mode:	Mode 15		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4930.100	54.32	-0.96	53.36	74.00	-20.64	peak
2	4930.100	41.71	-0.96	40.75	54.00	-13.25	AVG
3	4997.200	54.08	-0.78	53.30	74.00	-20.70	peak
4	4997.200	42.74	-0.78	41.96	54.00	-12.04	AVG
5	5063.200	54.32	-0.65	53.67	74.00	-20.33	peak
6	5063.200	43.96	-0.65	43.31	54.00	-10.69	AVG
7	5090.700	57.26	-0.60	56.66	74.00	-17.34	peak
8	5090.700	45.49	-0.60	44.89	54.00	-9.11	AVG
9	5116.000	59.81	-0.54	59.27	74.00	-14.73	peak
10	5116.000	48.07	-0.54	47.53	54.00	-6.47	AVG
11	5134.700	59.97	-0.51	59.46	74.00	-14.54	peak
12	5134.700	51.08	-0.51	50.57	54.00	-3.43	AVG
13	5150.000	60.34	-0.48	59.86	74.00	-14.14	peak
14	5150.000	52.27	-0.48	51.79	54.00	-2.21	AVG
15	5200.700	104.34	-0.37	103.97	--	--	peak
16	5350.000	51.25	-0.08	51.17	74.00	-22.83	peak
17	5385.500	52.63	0.00	52.63	74.00	-21.37	peak
18	5385.500	39.86	0.00	39.86	54.00	-14.14	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5290 MHz		
Mode:	Mode 15		
Ant.Polar.:	Horizontal		

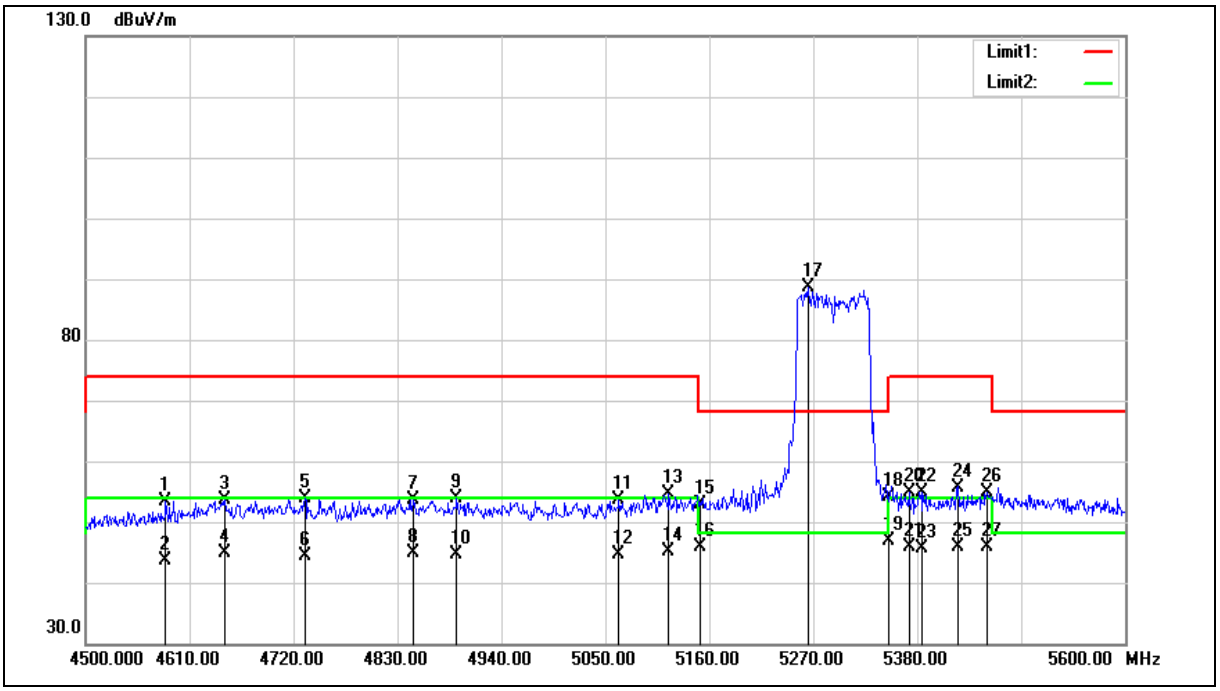

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5290 MHz		
Mode:	Mode 15		
Ant.Polar.:	Horizontal		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4584.700	49.76	3.70	53.46	74.00	-20.54	peak
2	4584.700	39.91	3.70	43.61	54.00	-10.39	AVG
3	4647.400	49.67	3.86	53.53	74.00	-20.47	peak
4	4647.400	41.02	3.86	44.88	54.00	-9.12	AVG
5	4732.100	49.69	4.07	53.76	74.00	-20.24	peak
6	4732.100	40.41	4.07	44.48	54.00	-9.52	AVG
7	4846.500	49.31	4.35	53.66	74.00	-20.34	peak
8	4846.500	40.46	4.35	44.81	54.00	-9.19	AVG
9	4892.700	49.33	4.47	53.80	74.00	-20.20	peak
10	4892.700	40.04	4.47	44.51	54.00	-9.49	AVG
11	5064.300	48.76	4.91	53.67	74.00	-20.33	peak
12	5064.300	39.67	4.91	44.58	54.00	-9.42	AVG
13	5117.100	49.57	5.03	54.60	74.00	-19.40	peak
14	5117.100	40.18	5.03	45.21	54.00	-8.79	AVG
15	5150.000	47.72	5.12	52.84	74.00	-21.16	peak
16	5150.000	40.74	5.12	45.86	54.00	-8.14	AVG
17	5264.500	83.25	5.40	88.65	--	--	peak
18	5350.000	48.52	5.61	54.13	74.00	-19.87	peak
19	5350.000	41.24	5.61	46.85	54.00	-7.15	AVG
20	5371.200	49.19	5.66	54.85	74.00	-19.15	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5290 MHz		
Mode:	Mode 15		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
21	5371.200	40.25	5.66	45.91	54.00	-8.09	AVG
22	5384.400	49.21	5.69	54.90	74.00	-19.10	peak
23	5384.400	40.03	5.69	45.72	54.00	-8.28	AVG
24	5422.900	49.96	5.79	55.75	74.00	-18.25	peak
25	5422.900	40.09	5.79	45.88	54.00	-8.12	AVG
26	5453.700	48.93	5.86	54.79	74.00	-19.21	peak
27	5453.700	40.07	5.86	45.93	54.00	-8.07	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5290 MHz		
Mode:	Mode 15		
Ant.Polar.:	Vertical		

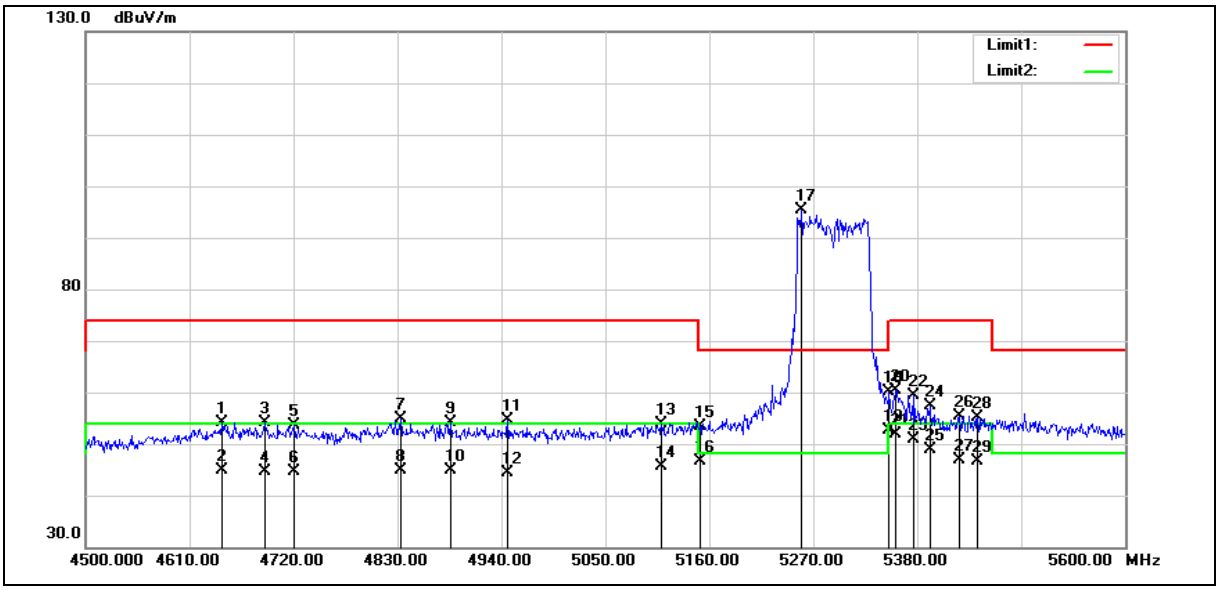

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5290 MHz		
Mode:	Mode 15		
Ant.Polar.:	Vertical		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4644.100	50.39	3.84	54.23	74.00	-19.77	peak
2	4644.100	41.10	3.84	44.94	54.00	-9.06	AVG
3	4689.200	50.16	3.96	54.12	74.00	-19.88	peak
4	4689.200	40.78	3.96	44.74	54.00	-9.26	AVG
5	4721.100	49.55	4.03	53.58	74.00	-20.42	peak
6	4721.100	40.59	4.03	44.62	54.00	-9.38	AVG
7	4833.300	50.67	4.32	54.99	74.00	-19.01	peak
8	4833.300	40.53	4.32	44.85	54.00	-9.15	AVG
9	4886.100	49.61	4.46	54.07	74.00	-19.93	peak
10	4886.100	40.51	4.46	44.97	54.00	-9.03	AVG
11	4946.600	49.90	4.61	54.51	74.00	-19.49	peak
12	4946.600	39.82	4.61	44.43	54.00	-9.57	AVG
13	5109.400	48.93	5.02	53.95	74.00	-20.05	peak
14	5109.400	40.59	5.02	45.61	54.00	-8.39	AVG
15	5150.000	48.19	5.12	53.31	74.00	-20.69	peak
16	5150.000	41.60	5.12	46.72	54.00	-7.28	AVG
17	5257.900	89.91	5.38	95.29	--	--	peak
18	5350.000	54.44	5.61	60.05	74.00	-13.95	peak
19	5350.000	46.98	5.61	52.59	54.00	-1.41	AVG
20	5356.900	54.84	5.63	60.47	74.00	-13.53	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5290 MHz		
Mode:	Mode 15		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
21	5356.900	46.33	5.63	51.96	54.00	-2.04	AVG
22	5376.700	53.67	5.67	59.34	74.00	-14.66	peak
23	5376.700	45.27	5.67	50.94	54.00	-3.06	AVG
24	5393.200	51.65	5.71	57.36	74.00	-16.64	peak
25	5393.200	43.14	5.71	48.85	54.00	-5.15	AVG
26	5425.100	49.64	5.80	55.44	74.00	-18.56	peak
27	5425.100	41.19	5.80	46.99	54.00	-7.01	AVG
28	5443.800	49.24	5.84	55.08	74.00	-18.92	peak
29	5443.800	40.70	5.84	46.54	54.00	-7.46	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5530 MHz		
Mode:	Mode 15		
Ant.Polar.:	Horizontal		

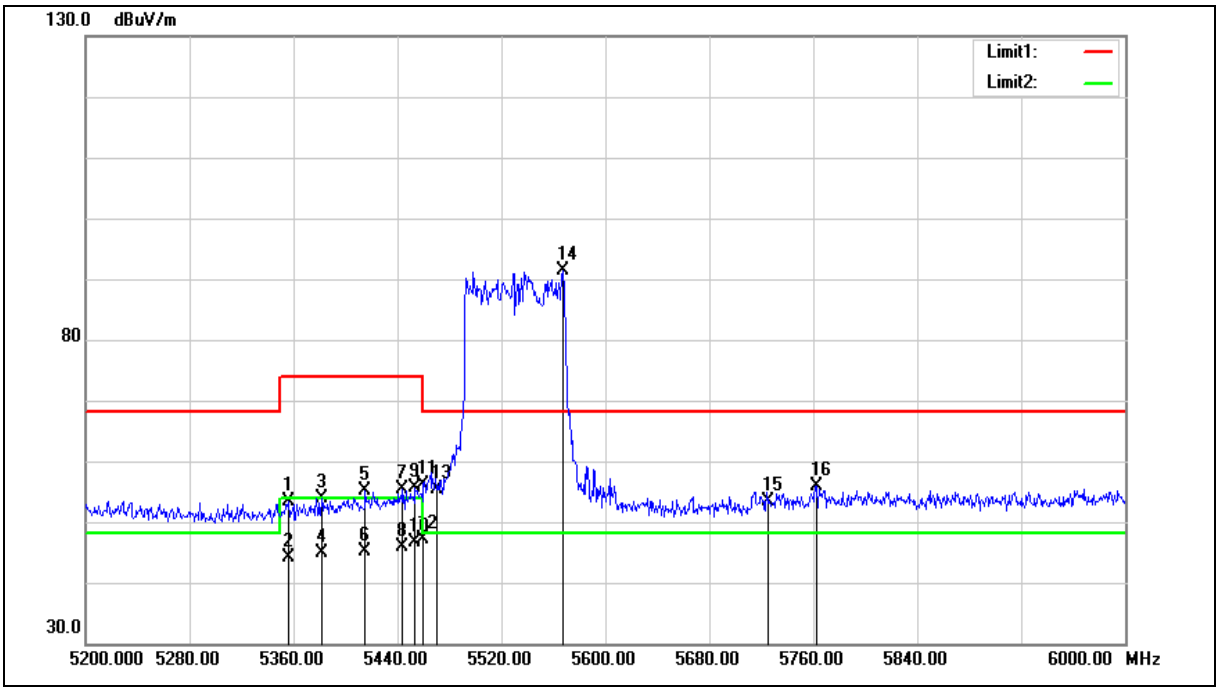

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5530 MHz		
Mode:	Mode 15		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5356.000	47.71	5.62	53.33	74.00	-20.67	peak
2	5356.000	38.49	5.62	44.11	54.00	-9.89	AVG
3	5381.600	48.19	5.69	53.88	74.00	-20.12	peak
4	5381.600	39.21	5.69	44.90	54.00	-9.10	AVG
5	5415.200	49.28	5.77	55.05	74.00	-18.95	peak
6	5415.200	39.31	5.77	45.08	54.00	-8.92	AVG
7	5444.000	49.53	5.84	55.37	74.00	-18.63	peak
8	5444.000	40.13	5.84	45.97	54.00	-8.03	AVG
9	5453.600	49.68	5.86	55.54	74.00	-18.46	peak
10	5453.600	40.82	5.86	46.68	54.00	-7.32	AVG
11	5460.000	50.21	5.88	56.09	74.00	-17.91	peak
12	5460.000	41.15	5.88	47.03	74.00	-26.97	peak
13	5470.000	49.55	5.91	55.46	68.20	-12.74	peak
14	5567.200	85.32	6.12	91.44	--	--	peak
15	5725.000	47.00	6.47	53.47	68.20	-14.73	peak
16	5762.400	49.38	6.57	55.95	68.20	-12.25	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5530 MHz		
Mode:	Mode 15		
Ant.Polar.:	Vertical		

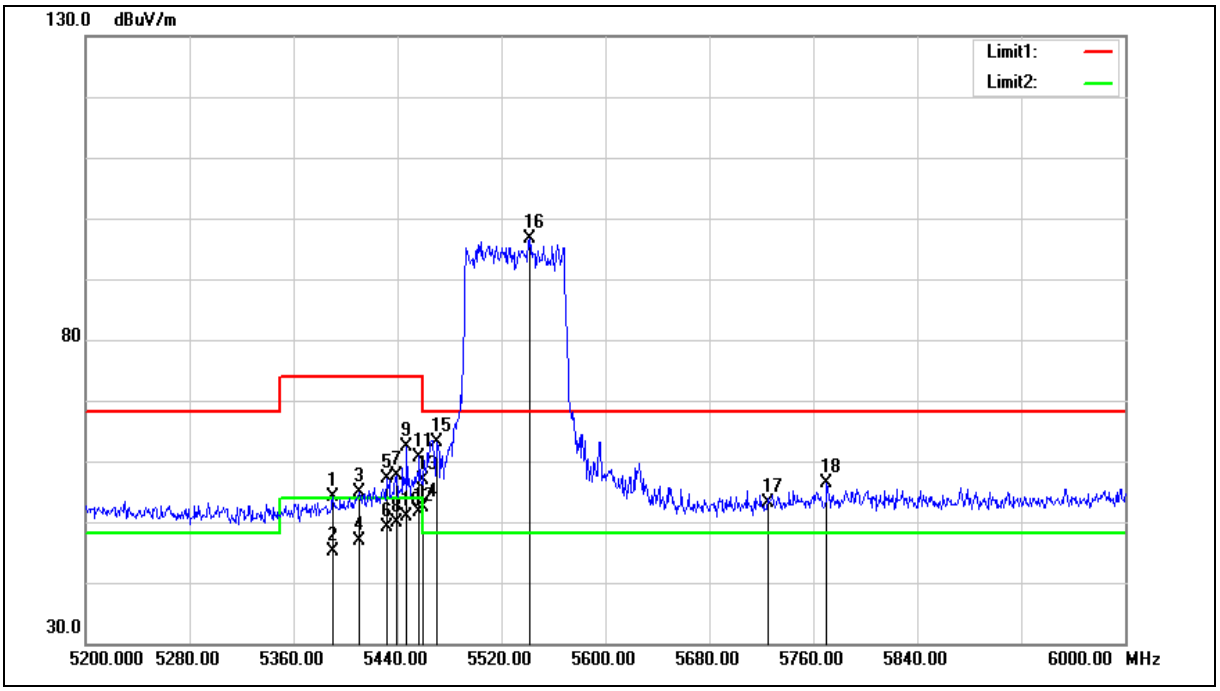

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5530 MHz		
Mode:	Mode 15		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5390.400	48.43	5.70	54.13	74.00	-19.87	peak
2	5390.400	39.41	5.70	45.11	54.00	-8.89	AVG
3	5410.400	49.17	5.76	54.93	74.00	-19.07	peak
4	5410.400	41.19	5.76	46.95	54.00	-7.05	AVG
5	5432.000	51.19	5.82	57.01	74.00	-16.99	peak
6	5432.000	43.28	5.82	49.10	54.00	-4.90	AVG
7	5439.200	51.80	5.82	57.62	74.00	-16.38	peak
8	5439.200	44.16	5.82	49.98	54.00	-4.02	AVG
9	5447.200	56.64	5.84	62.48	74.00	-11.52	peak
10	5447.200	45.05	5.84	50.89	54.00	-3.11	AVG
11	5456.800	54.88	5.87	60.75	74.00	-13.25	peak
12	5456.800	45.76	5.87	51.63	54.00	-2.37	AVG
13	5460.000	50.92	5.88	56.80	74.00	-17.20	peak
14	5460.000	46.50	5.88	52.38	54.00	-1.62	AVG
15	5470.000	57.29	5.91	63.20	68.20	-5.00	peak
16	5541.600	90.56	6.07	96.63	--	--	peak
17	5725.000	46.61	6.47	53.08	68.20	-15.12	peak
18	5770.400	49.80	6.57	56.37	68.20	-11.83	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5775 MHz		
Mode:	Mode 15		
Ant.Polar.:	Horizontal		

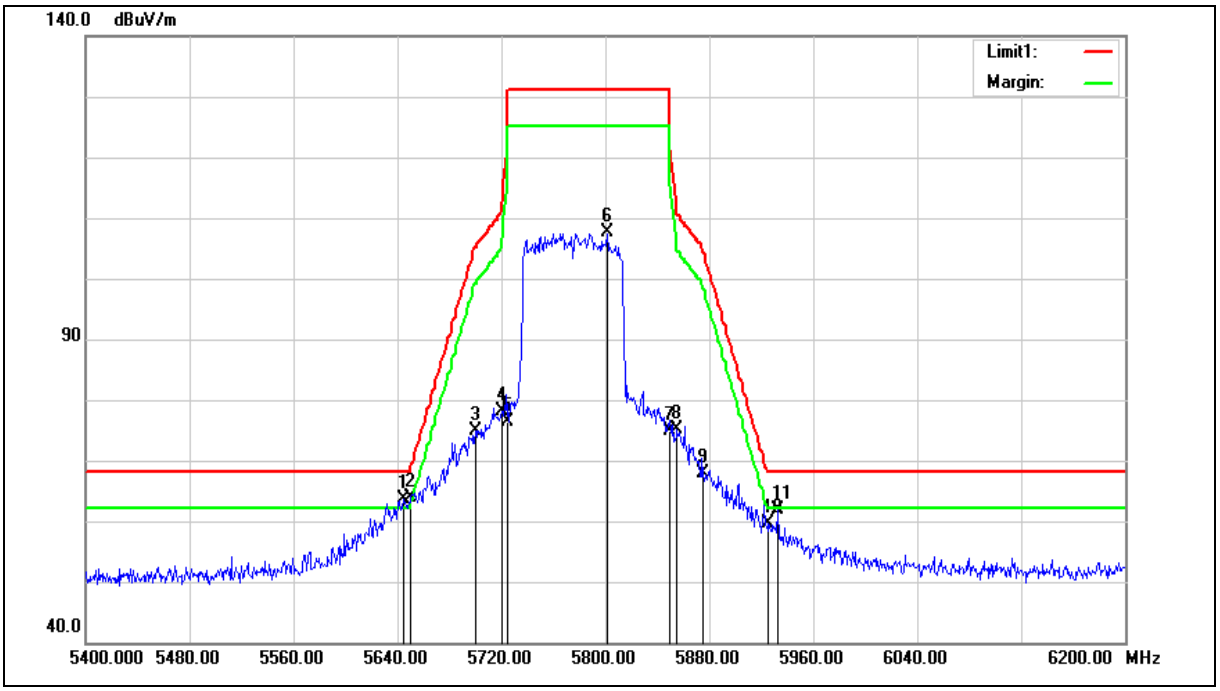

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5775 MHz		
Mode:	Mode 15		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5644.800	62.91	0.60	63.51	68.20	-4.69	peak
2	5650.000	63.15	0.62	63.77	68.20	-4.43	peak
3	5700.000	74.06	0.75	74.81	105.20	-30.39	peak
4	5720.000	77.35	0.81	78.16	110.80	-32.64	peak
5	5725.000	75.46	0.82	76.28	122.20	-45.92	peak
6	5801.600	106.57	1.03	107.60	--	--	peak
7	5850.000	73.72	1.17	74.89	122.20	-47.31	peak
8	5855.000	73.85	1.18	75.03	110.80	-35.77	peak
9	5875.000	66.58	1.23	67.81	105.20	-37.39	peak
10	5925.000	58.26	1.37	59.63	68.20	-8.57	peak
11	5932.800	60.45	1.38	61.83	68.20	-6.37	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5775 MHz		
Mode:	Mode 15		
Ant.Polar.:	Vertical		

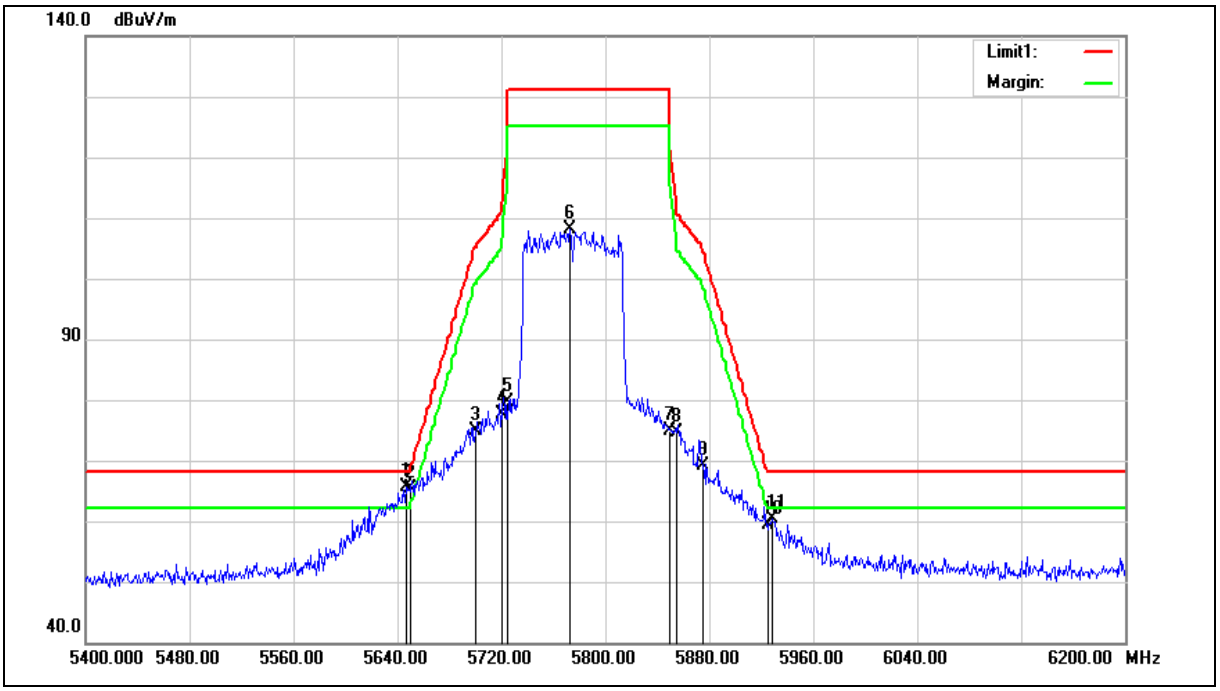

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5775 MHz		
Mode:	Mode 15		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5646.400	65.08	0.61	65.69	68.20	-2.51	peak
2	5650.000	64.76	0.62	65.38	68.20	-2.82	peak
3	5700.000	74.04	0.75	74.79	105.20	-30.41	peak
4	5720.000	76.86	0.81	77.67	110.80	-33.13	peak
5	5725.000	78.71	0.82	79.53	122.20	-42.67	peak
6	5772.800	107.10	0.95	108.05	--	--	peak
7	5850.000	73.80	1.17	74.97	122.20	-47.23	peak
8	5855.000	73.37	1.18	74.55	110.80	-36.25	peak
9	5875.000	67.96	1.23	69.19	105.20	-36.01	peak
10	5925.000	58.12	1.37	59.49	68.20	-8.71	peak
11	5928.800	59.02	1.38	60.40	68.20	-7.80	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5180 MHz		
Mode:	Mode 16		
Ant.Polar.:	Horizontal		

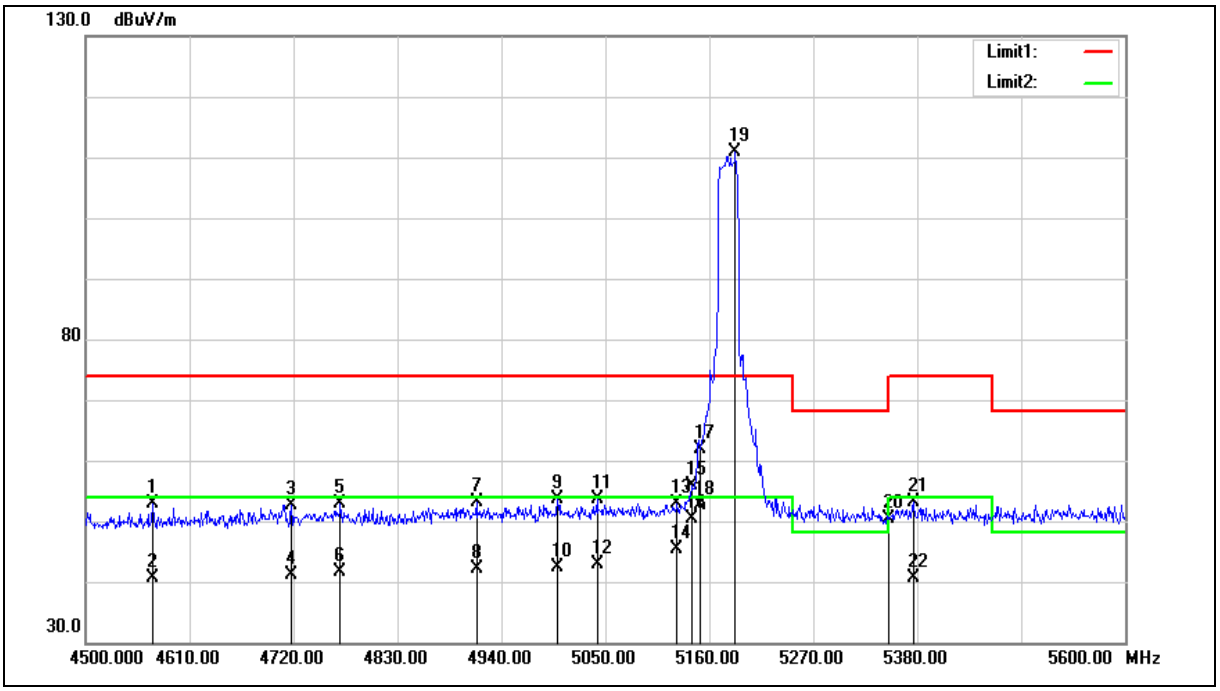

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5180 MHz		
Mode:	Mode 16		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4570.400	54.88	-1.95	52.93	74.00	-21.07	peak
2	4570.400	42.63	-1.95	40.68	54.00	-13.32	AVG
3	4717.800	54.16	-1.55	52.61	74.00	-21.39	peak
4	4717.800	42.69	-1.55	41.14	54.00	-12.86	AVG
5	4769.500	54.18	-1.40	52.78	74.00	-21.22	peak
6	4769.500	42.98	-1.40	41.58	54.00	-12.42	AVG
7	4913.600	54.15	-1.01	53.14	74.00	-20.86	peak
8	4913.600	43.05	-1.01	42.04	54.00	-11.96	AVG
9	4999.400	54.28	-0.77	53.51	74.00	-20.49	peak
10	4999.400	43.26	-0.77	42.49	54.00	-11.51	AVG
11	5041.200	54.21	-0.69	53.52	74.00	-20.48	peak
12	5041.200	43.58	-0.69	42.89	54.00	-11.11	AVG
13	5125.900	53.44	-0.52	52.92	74.00	-21.08	peak
14	5125.900	46.01	-0.52	45.49	54.00	-8.51	AVG
15	5141.300	56.41	-0.49	55.92	74.00	-18.08	peak
16	5141.300	50.75	-0.49	50.26	54.00	-3.74	AVG
17	5150.000	62.24	-0.48	61.76	74.00	-12.24	peak
18	5150.000	53.19	-0.48	52.71	54.00	-1.29	AVG
19	5187.500	111.31	-0.40	110.91	--	--	peak
20	5350.000	50.55	-0.08	50.47	74.00	-23.53	peak
21	5375.600	53.19	-0.03	53.16	74.00	-20.84	peak
22	5375.600	40.76	-0.03	40.73	54.00	-13.27	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5180 MHz		
Mode:	Mode 16		
Ant.Polar.:	Vertical		

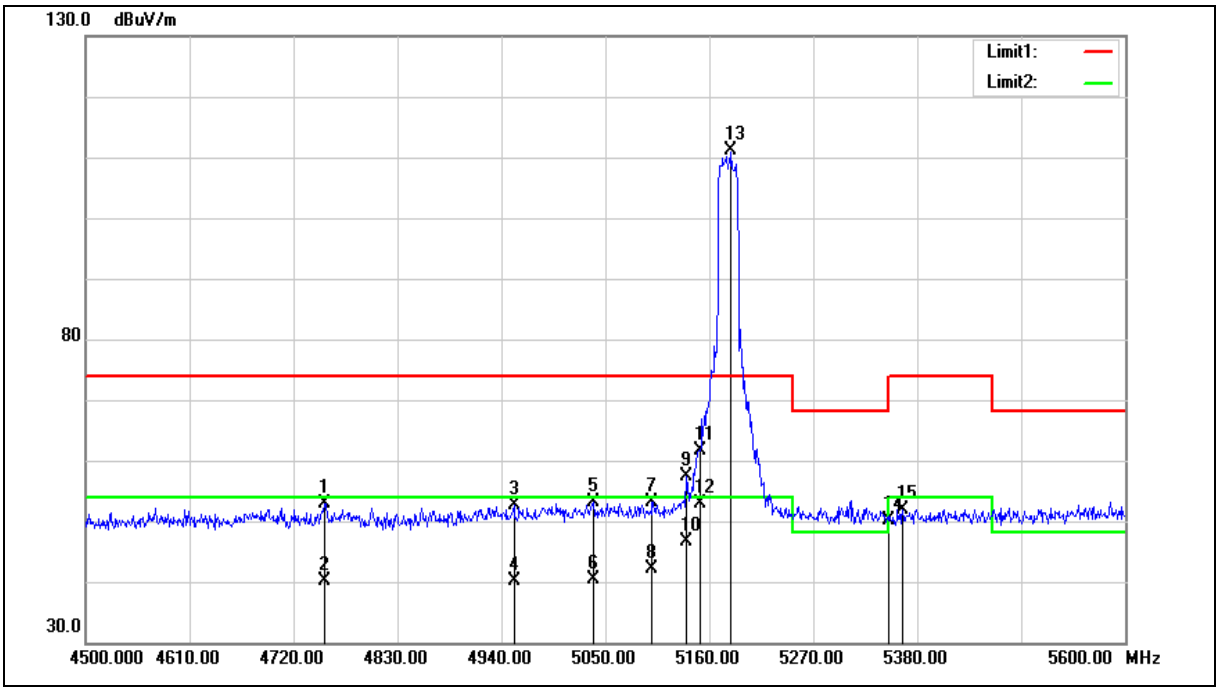

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5180 MHz		
Mode:	Mode 16		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4753.000	54.30	-1.45	52.85	74.00	-21.15	peak
2	4753.000	41.68	-1.45	40.23	54.00	-13.77	AVG
3	4953.200	53.53	-0.89	52.64	74.00	-21.36	peak
4	4953.200	41.06	-0.89	40.17	54.00	-13.83	AVG
5	5037.900	53.74	-0.69	53.05	74.00	-20.95	peak
6	5037.900	41.11	-0.69	40.42	54.00	-13.58	AVG
7	5099.500	53.76	-0.57	53.19	74.00	-20.81	peak
8	5099.500	42.62	-0.57	42.05	54.00	-11.95	AVG
9	5135.800	57.77	-0.50	57.27	74.00	-16.73	peak
10	5135.800	47.05	-0.50	46.55	54.00	-7.45	AVG
11	5150.000	62.03	-0.48	61.55	74.00	-12.45	peak
12	5150.000	53.32	-0.48	52.84	54.00	-1.16	AVG
13	5183.100	111.63	-0.40	111.23	--	--	peak
14	5350.000	50.31	-0.08	50.23	74.00	-23.77	peak
15	5364.600	51.94	-0.05	51.89	74.00	-22.11	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5200 MHz		
Mode:	Mode 16		
Ant.Polar.:	Horizontal		

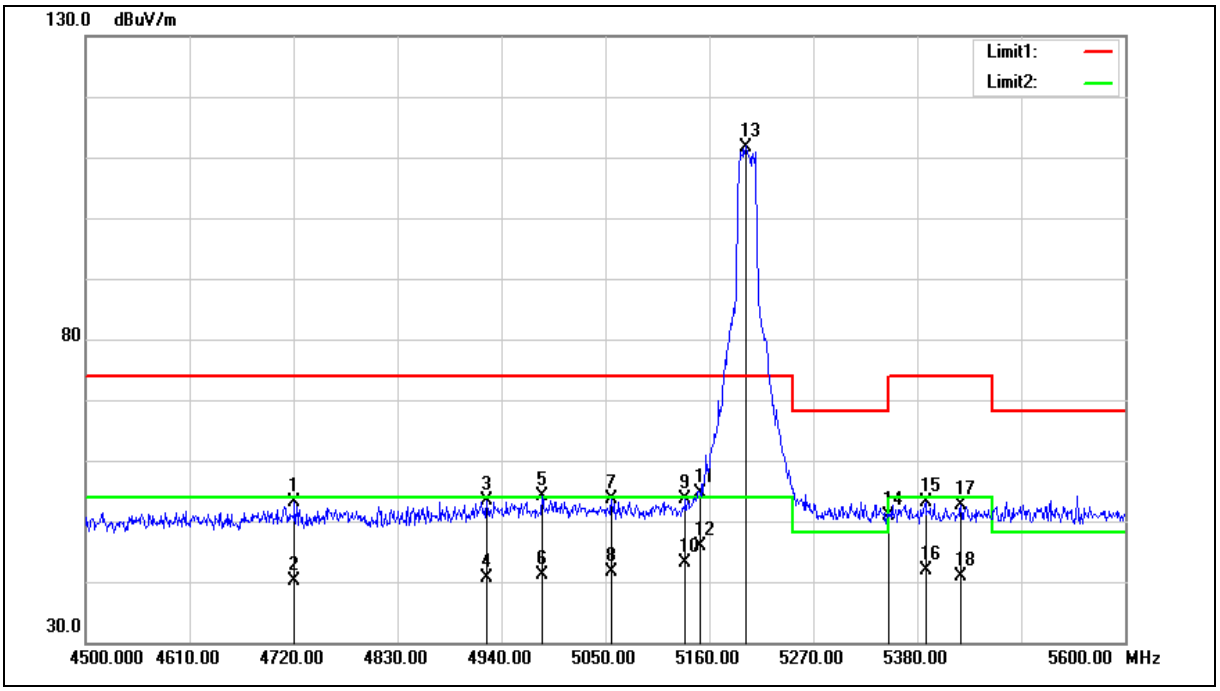

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5200 MHz		
Mode:	Mode 16		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4721.100	54.71	-1.53	53.18	74.00	-20.82	peak
2	4721.100	41.67	-1.53	40.14	54.00	-13.86	AVG
3	4924.600	54.36	-0.99	53.37	74.00	-20.63	peak
4	4924.600	41.50	-0.99	40.51	54.00	-13.49	AVG
5	4982.900	54.90	-0.82	54.08	74.00	-19.92	peak
6	4982.900	42.06	-0.82	41.24	54.00	-12.76	AVG
7	5056.600	54.27	-0.65	53.62	74.00	-20.38	peak
8	5056.600	42.24	-0.65	41.59	54.00	-12.41	AVG
9	5134.700	54.06	-0.51	53.55	74.00	-20.45	peak
10	5134.700	43.64	-0.51	43.13	54.00	-10.87	AVG
11	5150.000	55.01	-0.48	54.53	74.00	-19.47	peak
12	5150.000	46.46	-0.48	45.98	54.00	-8.02	AVG
13	5198.500	112.09	-0.37	111.72	--	--	peak
14	5350.000	51.07	-0.08	50.99	74.00	-23.01	peak
15	5388.800	53.20	0.00	53.20	74.00	-20.80	peak
16	5388.800	41.78	0.00	41.78	54.00	-12.22	AVG
17	5426.200	52.49	0.06	52.55	74.00	-21.45	peak
18	5426.200	40.76	0.06	40.82	54.00	-13.18	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5200 MHz		
Mode:	Mode 16		
Ant.Polar.:	Vertical		

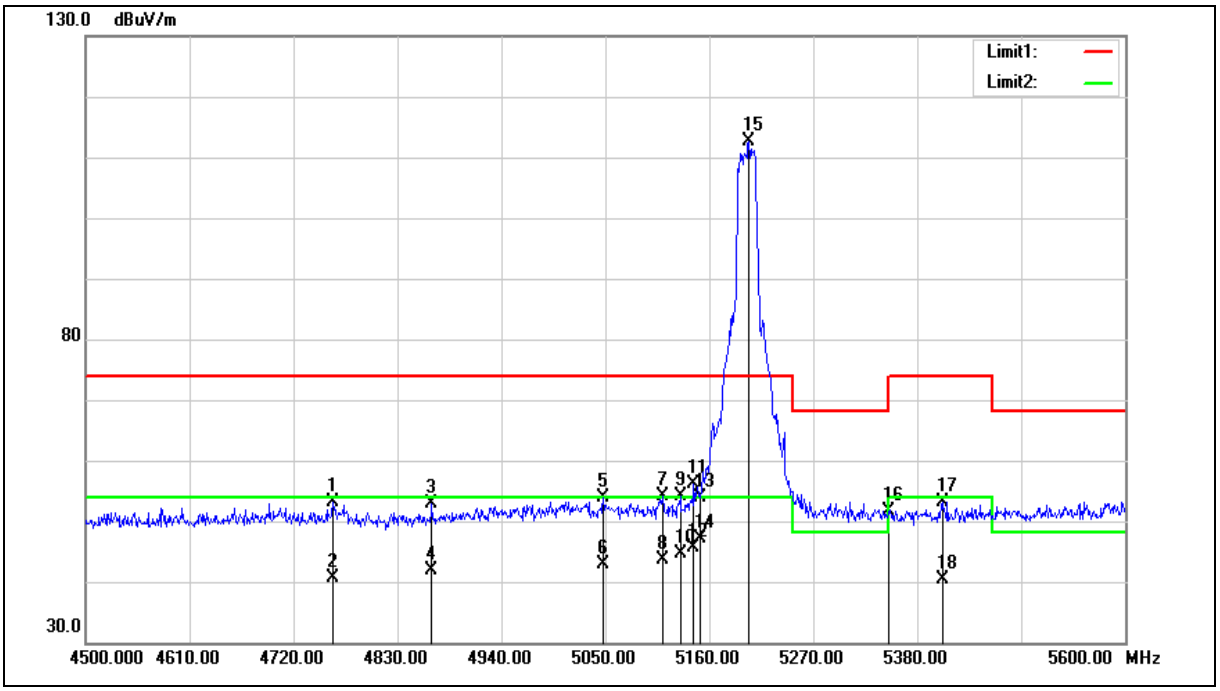

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5200 MHz		
Mode:	Mode 16		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4761.800	54.46	-1.42	53.04	74.00	-20.96	peak
2	4761.800	42.00	-1.42	40.58	54.00	-13.42	AVG
3	4866.300	53.89	-1.13	52.76	74.00	-21.24	peak
4	4866.300	43.09	-1.13	41.96	54.00	-12.04	AVG
5	5047.800	54.47	-0.68	53.79	74.00	-20.21	peak
6	5047.800	43.55	-0.68	42.87	54.00	-11.13	AVG
7	5110.500	54.70	-0.55	54.15	74.00	-19.85	peak
8	5110.500	44.24	-0.55	43.69	54.00	-10.31	AVG
9	5129.200	54.72	-0.52	54.20	74.00	-19.80	peak
10	5129.200	45.20	-0.52	44.68	54.00	-9.32	AVG
11	5143.500	56.68	-0.49	56.19	74.00	-17.81	peak
12	5143.500	46.23	-0.49	45.74	54.00	-8.26	AVG
13	5150.000	54.45	-0.48	53.97	74.00	-20.03	peak
14	5150.000	47.67	-0.48	47.19	54.00	-6.81	AVG
15	5201.800	112.90	-0.37	112.53	--	--	peak
16	5350.000	51.66	-0.08	51.58	74.00	-22.42	peak
17	5406.400	53.18	0.04	53.22	74.00	-20.78	peak
18	5406.400	40.44	0.04	40.48	54.00	-13.52	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5240 MHz		
Mode:	Mode 16		
Ant.Polar.:	Horizontal		

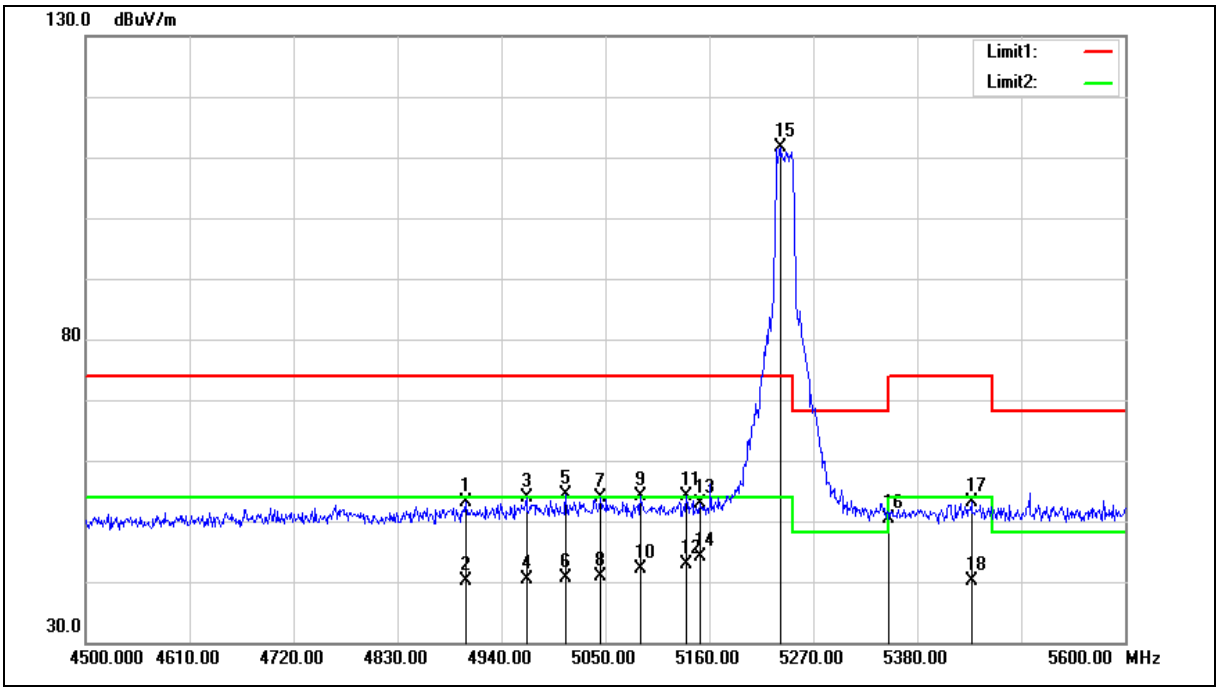

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5240 MHz		
Mode:	Mode 16		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4902.600	54.12	-1.05	53.07	74.00	-20.93	peak
2	4902.600	41.17	-1.05	40.12	54.00	-13.88	AVG
3	4966.400	54.76	-0.87	53.89	74.00	-20.11	peak
4	4966.400	41.21	-0.87	40.34	54.00	-13.66	AVG
5	5008.200	55.23	-0.75	54.48	74.00	-19.52	peak
6	5008.200	41.33	-0.75	40.58	54.00	-13.42	AVG
7	5044.500	54.66	-0.68	53.98	74.00	-20.02	peak
8	5044.500	41.44	-0.68	40.76	54.00	-13.24	AVG
9	5087.400	54.64	-0.60	54.04	74.00	-19.96	peak
10	5087.400	42.62	-0.60	42.02	54.00	-11.98	AVG
11	5135.800	54.68	-0.50	54.18	74.00	-19.82	peak
12	5135.800	43.31	-0.50	42.81	54.00	-11.19	AVG
13	5150.000	53.25	-0.48	52.77	74.00	-21.23	peak
14	5150.000	44.61	-0.48	44.13	54.00	-9.87	AVG
15	5234.800	111.92	-0.31	111.61	--	--	peak
16	5350.000	50.56	-0.08	50.48	74.00	-23.52	peak
17	5437.200	53.08	0.09	53.17	74.00	-20.83	peak
18	5437.200	40.12	0.09	40.21	54.00	-13.79	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5240 MHz		
Mode:	Mode 16		
Ant.Polar.:	Vertical		

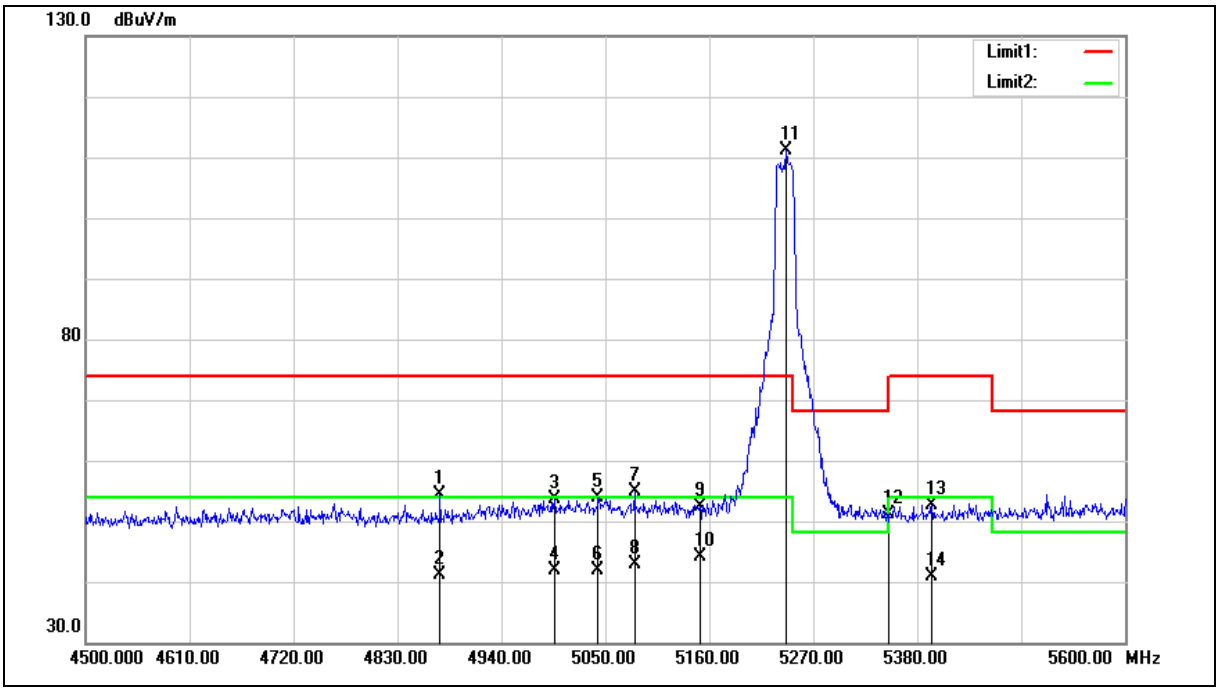

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5240 MHz		
Mode:	Mode 16		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4875.100	55.39	-1.11	54.28	74.00	-19.72	peak
2	4875.100	42.32	-1.11	41.21	54.00	-12.79	AVG
3	4996.100	54.47	-0.78	53.69	74.00	-20.31	peak
4	4996.100	42.72	-0.78	41.94	54.00	-12.06	AVG
5	5042.300	54.56	-0.69	53.87	74.00	-20.13	peak
6	5042.300	42.60	-0.69	41.91	54.00	-12.09	AVG
7	5080.800	55.41	-0.61	54.80	74.00	-19.20	peak
8	5080.800	43.48	-0.61	42.87	54.00	-11.13	AVG
9	5150.000	52.78	-0.48	52.30	74.00	-21.70	peak
10	5150.000	44.58	-0.48	44.10	54.00	-9.90	AVG
11	5241.400	111.51	-0.29	111.22	--	--	peak
12	5350.000	51.24	-0.08	51.16	74.00	-22.84	peak
13	5395.400	52.72	0.01	52.73	74.00	-21.27	peak
14	5395.400	40.81	0.01	40.82	54.00	-13.18	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5260 MHz		
Mode:	Mode 16		
Ant.Polar.:	Horizontal		

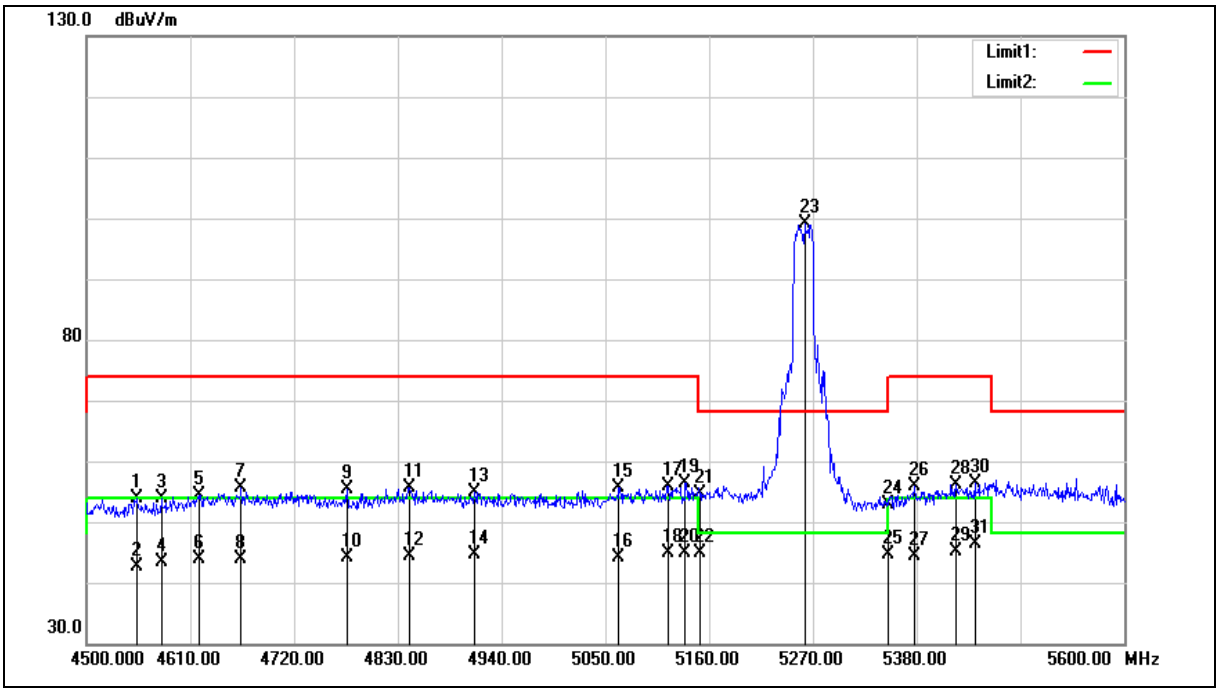

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5260 MHz		
Mode:	Mode 16		
Ant.Polar.:	Horizontal		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4553.900	50.18	3.62	53.80	74.00	-20.20	peak
2	4553.900	38.96	3.62	42.58	54.00	-11.42	AVG
3	4579.200	50.15	3.69	53.84	74.00	-20.16	peak
4	4579.200	39.74	3.69	43.43	54.00	-10.57	AVG
5	4618.800	50.70	3.78	54.48	74.00	-19.52	peak
6	4618.800	40.08	3.78	43.86	54.00	-10.14	AVG
7	4663.900	51.78	3.89	55.67	74.00	-18.33	peak
8	4663.900	40.06	3.89	43.95	54.00	-10.05	AVG
9	4776.100	51.15	4.18	55.33	74.00	-18.67	peak
10	4776.100	39.84	4.18	44.02	54.00	-9.98	AVG
11	4842.100	51.31	4.35	55.66	74.00	-18.34	peak
12	4842.100	40.00	4.35	44.35	54.00	-9.65	AVG
13	4911.400	50.34	4.53	54.87	74.00	-19.13	peak
14	4911.400	40.00	4.53	44.53	54.00	-9.47	AVG
15	5064.300	50.73	4.91	55.64	74.00	-18.36	peak
16	5064.300	39.33	4.91	44.24	54.00	-9.76	AVG
17	5117.100	50.84	5.03	55.87	74.00	-18.13	peak
18	5117.100	39.85	5.03	44.88	54.00	-9.12	AVG
19	5134.700	51.31	5.08	56.39	74.00	-17.61	peak
20	5134.700	39.76	5.08	44.84	54.00	-9.16	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5260 MHz		
Mode:	Mode 16		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
21	5150.000	49.44	5.12	54.56	74.00	-19.44	peak
22	5150.000	39.85	5.12	44.97	54.00	-9.03	AVG
23	5261.200	93.73	5.39	99.12	--	--	peak
24	5350.000	47.35	5.61	52.96	74.00	-21.04	peak
25	5350.000	39.11	5.61	44.72	54.00	-9.28	AVG
26	5377.800	50.09	5.67	55.76	74.00	-18.24	peak
27	5377.800	38.81	5.67	44.48	54.00	-9.52	AVG
28	5421.800	50.41	5.79	56.20	74.00	-17.80	peak
29	5421.800	39.43	5.79	45.22	54.00	-8.78	AVG
30	5441.600	50.52	5.82	56.34	74.00	-17.66	peak
31	5441.600	40.46	5.82	46.28	54.00	-7.72	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5260 MHz		
Mode:	Mode 16		
Ant.Polar.:	Vertical		

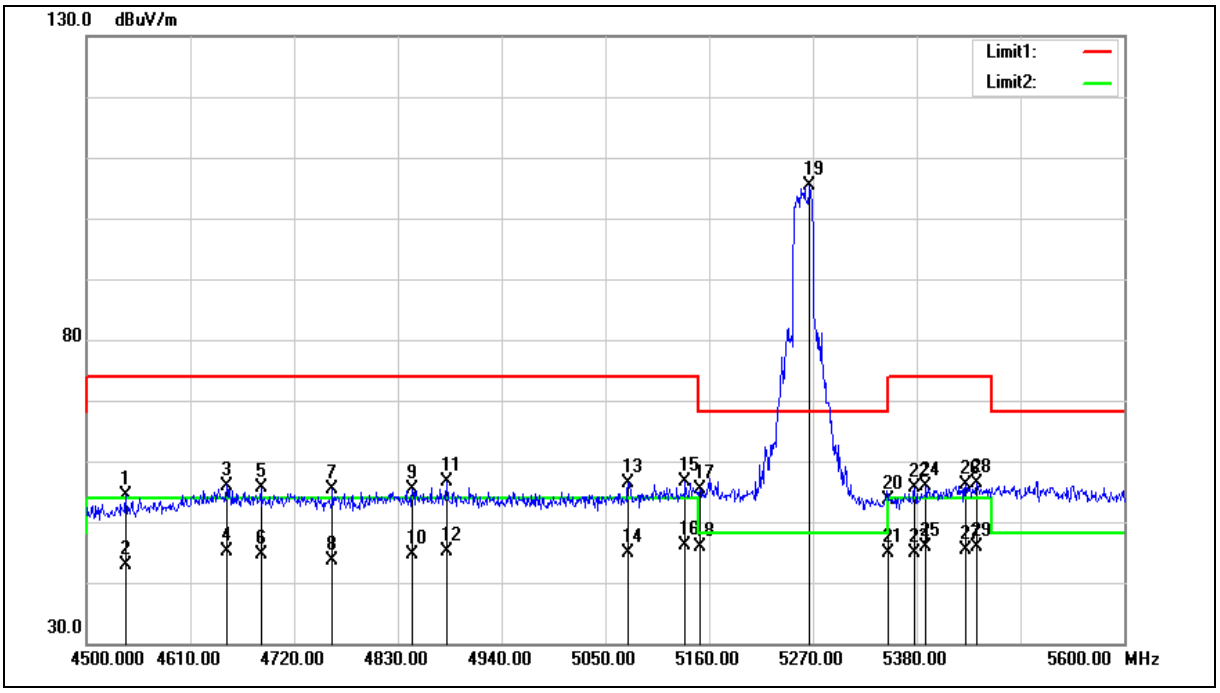

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5260 MHz		
Mode:	Mode 16		
Ant.Polar.:	Vertical		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4541.800	50.78	3.59	54.37	74.00	-19.63	peak
2	4541.800	39.23	3.59	42.82	54.00	-11.18	AVG
3	4648.500	52.14	3.86	56.00	74.00	-18.00	peak
4	4648.500	41.23	3.86	45.09	54.00	-8.91	AVG
5	4684.800	51.61	3.95	55.56	74.00	-18.44	peak
6	4684.800	40.70	3.95	44.65	54.00	-9.35	AVG
7	4760.700	51.36	4.14	55.50	74.00	-18.50	peak
8	4760.700	39.59	4.14	43.73	54.00	-10.27	AVG
9	4845.400	51.04	4.35	55.39	74.00	-18.61	peak
10	4845.400	40.26	4.35	44.61	54.00	-9.39	AVG
11	4881.700	52.17	4.45	56.62	74.00	-17.38	peak
12	4881.700	40.59	4.45	45.04	54.00	-8.96	AVG
13	5074.200	51.41	4.93	56.34	74.00	-17.66	peak
14	5074.200	39.98	4.93	44.91	54.00	-9.09	AVG
15	5134.700	51.51	5.08	56.59	74.00	-17.41	peak
16	5134.700	41.00	5.08	46.08	54.00	-7.92	AVG
17	5150.000	50.34	5.12	55.46	74.00	-18.54	peak
18	5150.000	40.72	5.12	45.84	54.00	-8.16	AVG
19	5266.700	100.10	5.40	105.50	--	--	peak
20	5350.000	48.04	5.61	53.65	74.00	-20.35	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5260 MHz		
Mode:	Mode 16		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
21	5350.000	39.30	5.61	44.91	54.00	-9.09	AVG
22	5377.800	49.88	5.67	55.55	74.00	-18.45	peak
23	5377.800	39.09	5.67	44.76	54.00	-9.24	AVG
24	5389.900	50.24	5.70	55.94	74.00	-18.06	peak
25	5389.900	40.14	5.70	45.84	54.00	-8.16	AVG
26	5431.700	50.35	5.82	56.17	74.00	-17.83	peak
27	5431.700	39.63	5.82	45.45	54.00	-8.55	AVG
28	5443.800	50.55	5.84	56.39	74.00	-17.61	peak
29	5443.800	40.02	5.84	45.86	54.00	-8.14	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5280 MHz		
Mode:	Mode 16		
Ant.Polar.:	Horizontal		

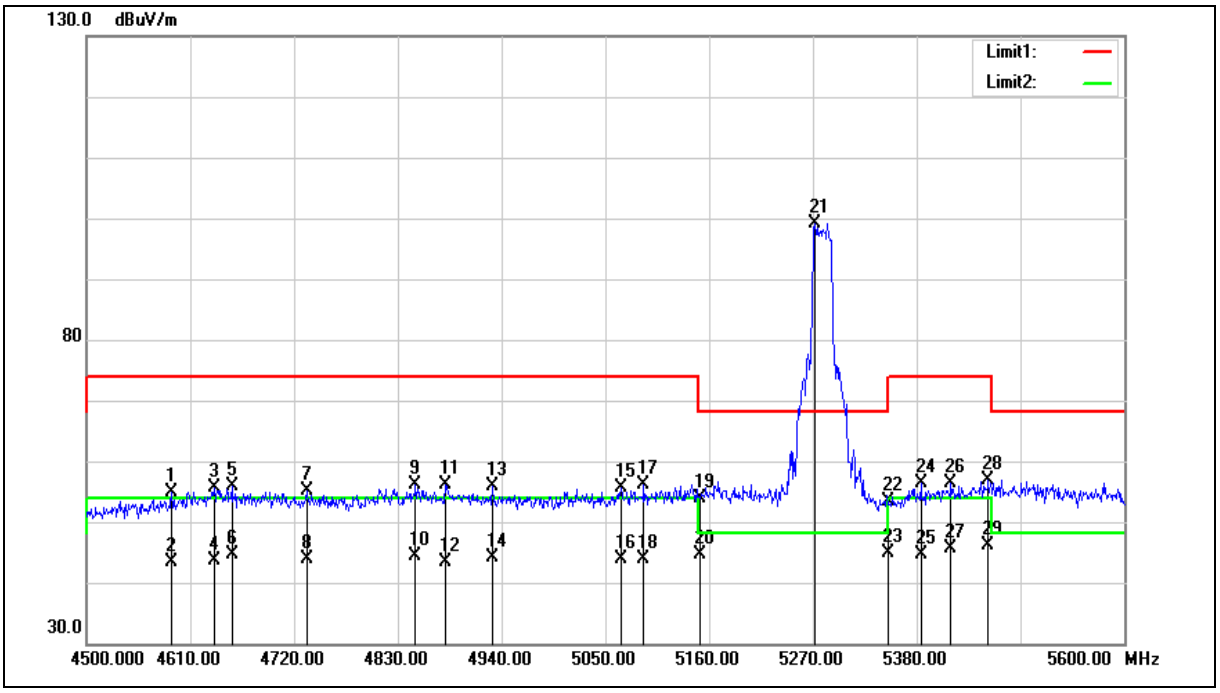

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5280 MHz		
Mode:	Mode 16		
Ant.Polar.:	Horizontal		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4590.200	51.10	3.70	54.80	74.00	-19.20	peak
2	4590.200	39.68	3.70	43.38	54.00	-10.62	AVG
3	4635.300	51.90	3.82	55.72	74.00	-18.28	peak
4	4635.300	39.69	3.82	43.51	54.00	-10.49	AVG
5	4654.000	52.02	3.88	55.90	74.00	-18.10	peak
6	4654.000	40.72	3.88	44.60	54.00	-9.40	AVG
7	4733.200	51.03	4.07	55.10	74.00	-18.90	peak
8	4733.200	39.79	4.07	43.86	54.00	-10.14	AVG
9	4848.700	51.74	4.36	56.10	74.00	-17.90	peak
10	4848.700	40.08	4.36	44.44	54.00	-9.56	AVG
11	4880.600	51.76	4.45	56.21	74.00	-17.79	peak
12	4880.600	38.82	4.45	43.27	54.00	-10.73	AVG
13	4930.100	51.24	4.57	55.81	74.00	-18.19	peak
14	4930.100	39.59	4.57	44.16	54.00	-9.84	AVG
15	5066.500	50.68	4.91	55.59	74.00	-18.41	peak
16	5066.500	38.85	4.91	43.76	54.00	-10.24	AVG
17	5090.700	51.19	4.97	56.16	74.00	-17.84	peak
18	5090.700	38.87	4.97	43.84	54.00	-10.16	AVG
19	5150.000	48.86	5.12	53.98	74.00	-20.02	peak
20	5150.000	39.60	5.12	44.72	54.00	-9.28	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5280 MHz		
Mode:	Mode 16		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
21	5272.200	93.69	5.42	99.11	--	--	peak
22	5350.000	47.78	5.61	53.39	74.00	-20.61	peak
23	5350.000	39.19	5.61	44.80	54.00	-9.20	AVG
24	5384.400	50.79	5.69	56.48	74.00	-17.52	peak
25	5384.400	38.82	5.69	44.51	54.00	-9.49	AVG
26	5416.300	50.72	5.77	56.49	74.00	-17.51	peak
27	5416.300	39.82	5.77	45.59	54.00	-8.41	AVG
28	5455.900	50.92	5.86	56.78	74.00	-17.22	peak
29	5455.900	40.32	5.86	46.18	54.00	-7.82	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5280 MHz		
Mode:	Mode 16		
Ant.Polar.:	Vertical		

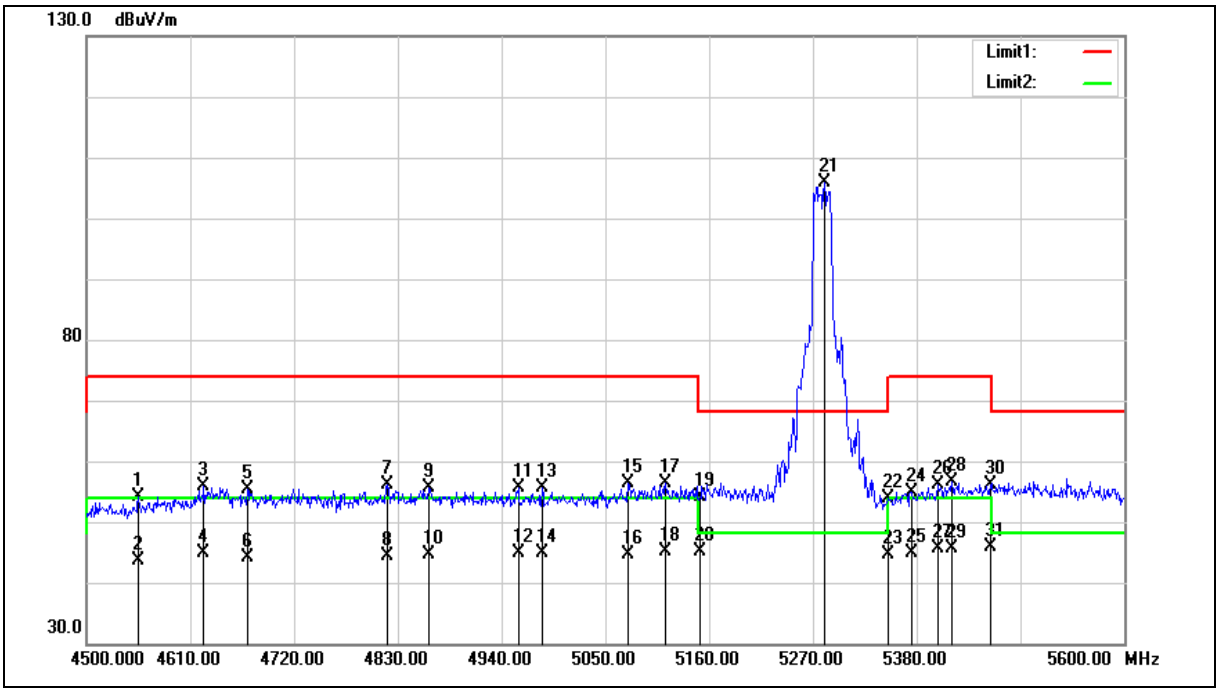

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5280 MHz		
Mode:	Mode 16		
Ant.Polar.:	Vertical		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4555.000	50.52	3.62	54.14	74.00	-19.86	peak
2	4555.000	39.93	3.62	43.55	54.00	-10.45	AVG
3	4624.300	52.12	3.80	55.92	74.00	-18.08	peak
4	4624.300	41.03	3.80	44.83	54.00	-9.17	AVG
5	4670.500	51.50	3.91	55.41	74.00	-18.59	peak
6	4670.500	40.24	3.91	44.15	54.00	-9.85	AVG
7	4819.000	51.82	4.29	56.11	74.00	-17.89	peak
8	4819.000	40.19	4.29	44.48	54.00	-9.52	AVG
9	4863.000	51.24	4.40	55.64	74.00	-18.36	peak
10	4863.000	40.12	4.40	44.52	54.00	-9.48	AVG
11	4957.600	50.91	4.64	55.55	74.00	-18.45	peak
12	4957.600	40.20	4.64	44.84	54.00	-9.16	AVG
13	4982.900	50.94	4.71	55.65	74.00	-18.35	peak
14	4982.900	40.12	4.71	44.83	54.00	-9.17	AVG
15	5074.200	51.45	4.93	56.38	74.00	-17.62	peak
16	5074.200	39.75	4.93	44.68	54.00	-9.32	AVG
17	5113.800	51.26	5.02	56.28	74.00	-17.72	peak
18	5113.800	40.00	5.02	45.02	54.00	-8.98	AVG
19	5150.000	49.05	5.12	54.17	74.00	-19.83	peak
20	5150.000	40.06	5.12	45.18	54.00	-8.82	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5280 MHz		
Mode:	Mode 16		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
21	5282.100	100.49	5.45	105.94	--	--	peak
22	5350.000	48.24	5.61	53.85	74.00	-20.15	peak
23	5350.000	39.11	5.61	44.72	54.00	-9.28	AVG
24	5374.500	49.29	5.66	54.95	74.00	-19.05	peak
25	5374.500	39.14	5.66	44.80	54.00	-9.20	AVG
26	5403.100	50.39	5.74	56.13	74.00	-17.87	peak
27	5403.100	39.83	5.74	45.57	54.00	-8.43	AVG
28	5417.400	50.87	5.77	56.64	74.00	-17.36	peak
29	5417.400	39.76	5.77	45.53	54.00	-8.47	AVG
30	5458.100	50.29	5.87	56.16	74.00	-17.84	peak
31	5458.100	40.07	5.87	45.94	54.00	-8.06	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5320 MHz		
Mode:	Mode 16		
Ant.Polar.:	Horizontal		

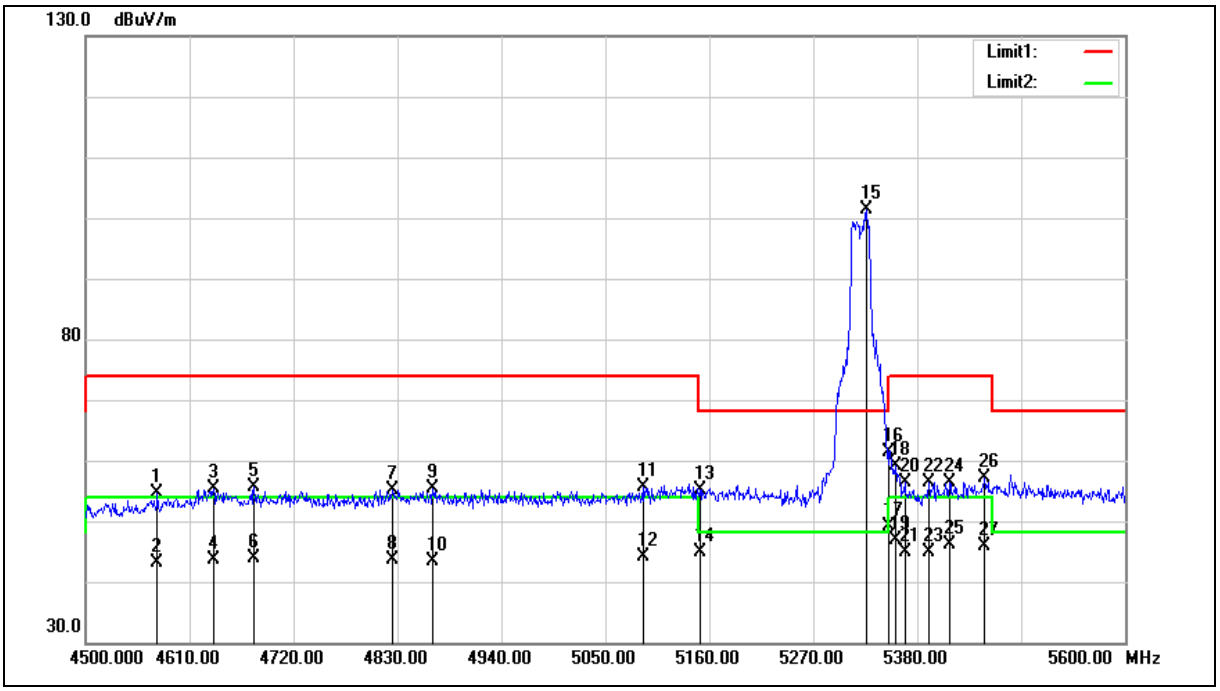

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5320 MHz		
Mode:	Mode 16		
Ant.Polar.:	Horizontal		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4575.900	50.95	3.67	54.62	74.00	-19.38	peak
2	4575.900	39.44	3.67	43.11	54.00	-10.89	AVG
3	4635.300	51.44	3.82	55.26	74.00	-18.74	peak
4	4635.300	39.87	3.82	43.69	54.00	-10.31	AVG
5	4678.200	51.82	3.93	55.75	74.00	-18.25	peak
6	4678.200	40.01	3.93	43.94	54.00	-10.06	AVG
7	4824.500	50.94	4.31	55.25	74.00	-18.75	peak
8	4824.500	39.34	4.31	43.65	54.00	-10.35	AVG
9	4867.400	51.07	4.42	55.49	74.00	-18.51	peak
10	4867.400	39.02	4.42	43.44	54.00	-10.56	AVG
11	5089.600	50.64	4.97	55.61	74.00	-18.39	peak
12	5089.600	39.08	4.97	44.05	54.00	-9.95	AVG
13	5150.000	50.08	5.12	55.20	74.00	-18.80	peak
14	5150.000	39.72	5.12	44.84	54.00	-9.16	AVG
15	5326.100	95.94	5.55	101.49	--	--	peak
16	5350.000	55.82	5.61	61.43	74.00	-12.57	peak
17	5350.000	43.47	5.61	49.08	54.00	-4.92	AVG
18	5356.900	53.50	5.63	59.13	74.00	-14.87	peak
19	5356.900	41.30	5.63	46.93	54.00	-7.07	AVG
20	5366.800	50.83	5.64	56.47	74.00	-17.53	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5320 MHz		
Mode:	Mode 16		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
21	5366.800	39.21	5.64	44.85	54.00	-9.15	AVG
22	5392.100	50.59	5.71	56.30	74.00	-17.70	peak
23	5392.100	39.28	5.71	44.99	54.00	-9.01	AVG
24	5414.100	50.63	5.77	56.40	74.00	-17.60	peak
25	5414.100	40.25	5.77	46.02	54.00	-7.98	AVG
26	5451.500	51.33	5.85	57.18	74.00	-16.82	peak
27	5451.500	39.97	5.85	45.82	54.00	-8.18	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5320 MHz		
Mode:	Mode 16		
Ant.Polar.:	Vertical		

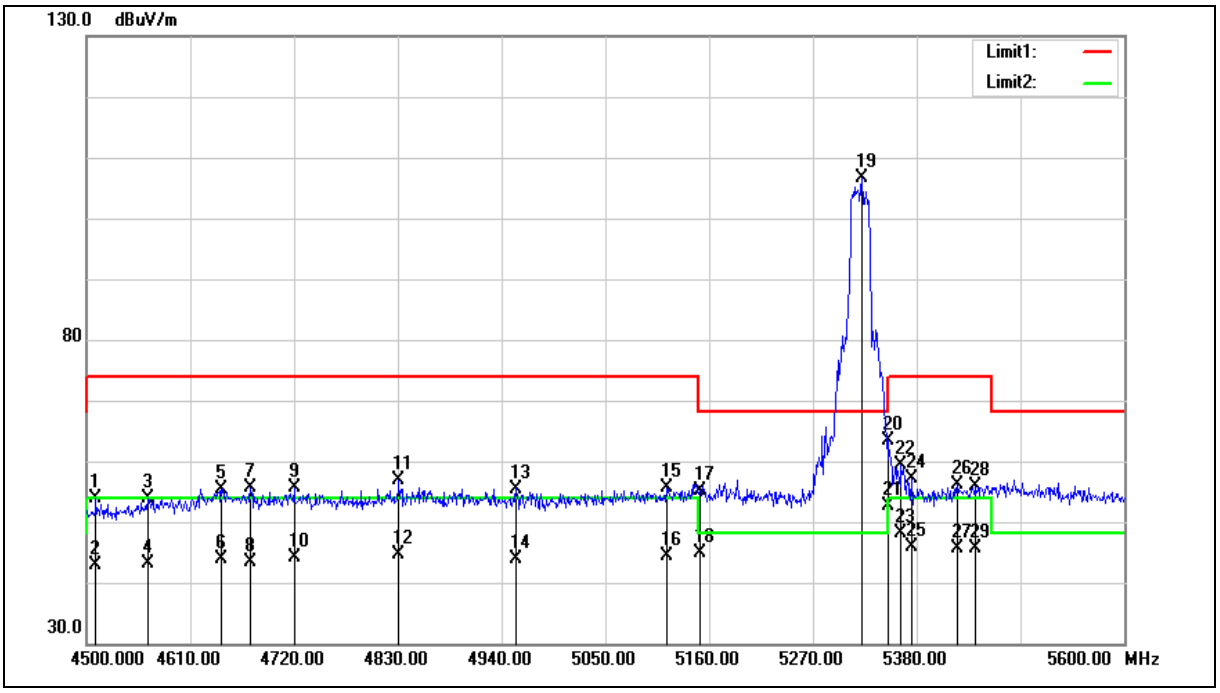

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5320 MHz		
Mode:	Mode 16		
Ant.Polar.:	Vertical		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4509.900	50.42	3.51	53.93	74.00	-20.07	peak
2	4509.900	39.28	3.51	42.79	54.00	-11.21	AVG
3	4564.900	50.18	3.65	53.83	74.00	-20.17	peak
4	4564.900	39.48	3.65	43.13	54.00	-10.87	AVG
5	4643.000	51.52	3.84	55.36	74.00	-18.64	peak
6	4643.000	40.05	3.84	43.89	54.00	-10.11	AVG
7	4673.800	51.59	3.92	55.51	74.00	-18.49	peak
8	4673.800	39.49	3.92	43.41	54.00	-10.59	AVG
9	4720.000	51.64	4.03	55.67	74.00	-18.33	peak
10	4720.000	39.99	4.03	44.02	54.00	-9.98	AVG
11	4831.100	52.46	4.32	56.78	74.00	-17.22	peak
12	4831.100	40.20	4.32	44.52	54.00	-9.48	AVG
13	4955.400	50.86	4.64	55.50	74.00	-18.50	peak
14	4955.400	39.30	4.64	43.94	54.00	-10.06	AVG
15	5114.900	50.54	5.03	55.57	74.00	-18.43	peak
16	5114.900	39.34	5.03	44.37	54.00	-9.63	AVG
17	5150.000	50.12	5.12	55.24	74.00	-18.76	peak
18	5150.000	39.68	5.12	44.80	54.00	-9.20	AVG
19	5321.700	101.10	5.54	106.64	--	--	peak
20	5350.000	57.65	5.61	63.26	74.00	-10.74	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5320 MHz		
Mode:	Mode 16		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
21	5350.000	46.96	5.61	52.57	54.00	-1.43	AVG
22	5363.500	53.66	5.64	59.30	74.00	-14.70	peak
23	5363.500	42.55	5.64	48.19	54.00	-5.81	AVG
24	5374.500	51.58	5.66	57.24	74.00	-16.76	peak
25	5374.500	40.20	5.66	45.86	54.00	-8.14	AVG
26	5422.900	50.41	5.79	56.20	74.00	-17.80	peak
27	5422.900	39.74	5.79	45.53	54.00	-8.47	AVG
28	5442.700	50.11	5.83	55.94	74.00	-18.06	peak
29	5442.700	39.74	5.83	45.57	54.00	-8.43	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5500 MHz		
Mode:	Mode 16		
Ant.Polar.:	Horizontal		

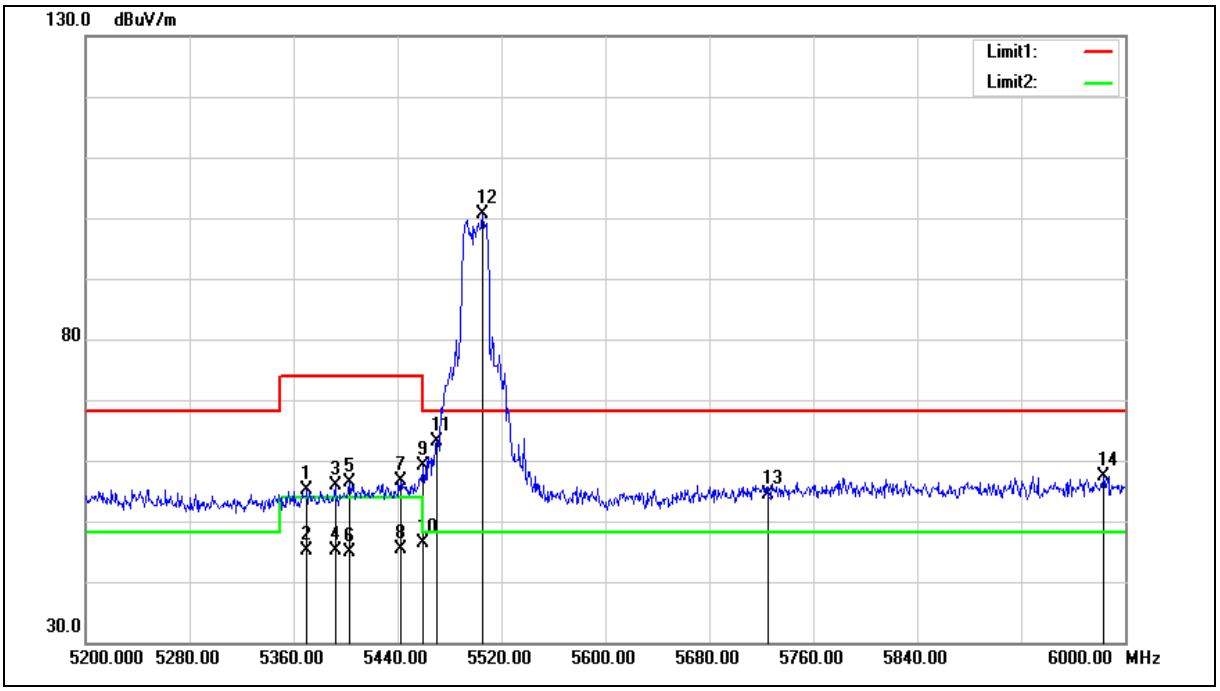

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5500 MHz		
Mode:	Mode 16		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5370.400	49.48	5.66	55.14	74.00	-18.86	peak
2	5370.400	39.38	5.66	45.04	54.00	-8.96	AVG
3	5392.000	50.05	5.71	55.76	74.00	-18.24	peak
4	5392.000	39.32	5.71	45.03	54.00	-8.97	AVG
5	5403.200	50.66	5.74	56.40	74.00	-17.60	peak
6	5403.200	39.12	5.74	44.86	54.00	-9.14	AVG
7	5442.400	50.70	5.83	56.53	74.00	-17.47	peak
8	5442.400	39.49	5.83	45.32	54.00	-8.68	AVG
9	5460.000	53.32	5.88	59.20	74.00	-14.80	peak
10	5460.000	40.49	5.88	46.37	54.00	-7.63	AVG
11	5470.000	57.17	5.91	63.08	68.20	-5.12	peak
12	5505.600	94.70	5.99	100.69	--	--	peak
13	5725.000	47.89	6.47	54.36	68.20	-13.84	peak
14	5983.200	50.39	7.05	57.44	68.20	-10.76	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5500 MHz		
Mode:	Mode 16		
Ant.Polar.:	Vertical		

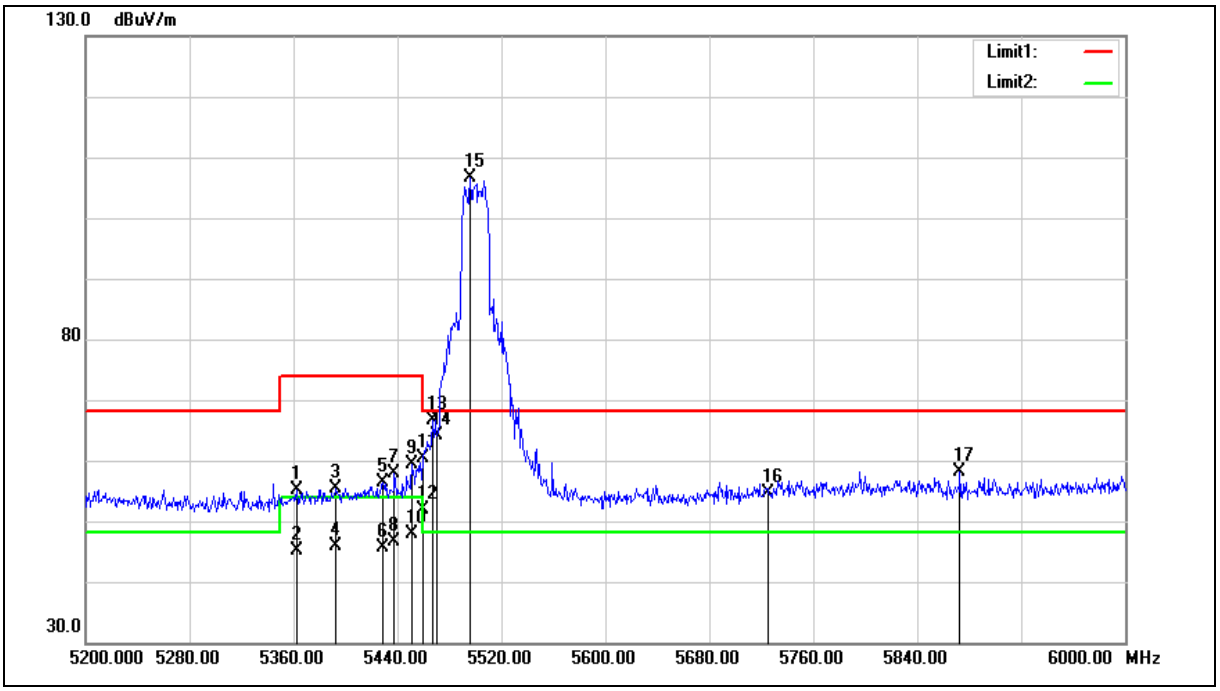

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5500 MHz		
Mode:	Mode 16		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5362.400	49.58	5.64	55.22	74.00	-18.78	peak
2	5362.400	39.56	5.64	45.20	54.00	-8.80	AVG
3	5392.800	49.64	5.71	55.35	74.00	-18.65	peak
4	5392.800	40.20	5.71	45.91	54.00	-8.09	AVG
5	5428.800	50.48	5.80	56.28	74.00	-17.72	peak
6	5428.800	39.86	5.80	45.66	54.00	-8.34	AVG
7	5437.600	51.95	5.82	57.77	74.00	-16.23	peak
8	5437.600	40.78	5.82	46.60	54.00	-7.40	AVG
9	5451.200	53.60	5.85	59.45	74.00	-14.55	peak
10	5451.200	41.99	5.85	47.84	54.00	-6.16	AVG
11	5460.000	54.58	5.88	60.46	74.00	-13.54	peak
12	5460.000	45.98	5.88	51.86	54.00	-2.14	AVG
13	5467.200	60.75	5.89	66.64	68.20	-1.56	peak
14	5470.000	58.30	5.91	64.21	68.20	-3.99	peak
15	5496.000	100.75	5.97	106.72	--	--	peak
16	5725.000	48.22	6.47	54.69	68.20	-13.51	peak
17	5872.800	51.34	6.81	58.15	68.20	-10.05	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5560 MHz		
Mode:	Mode 16		
Ant.Polar.:	Horizontal		

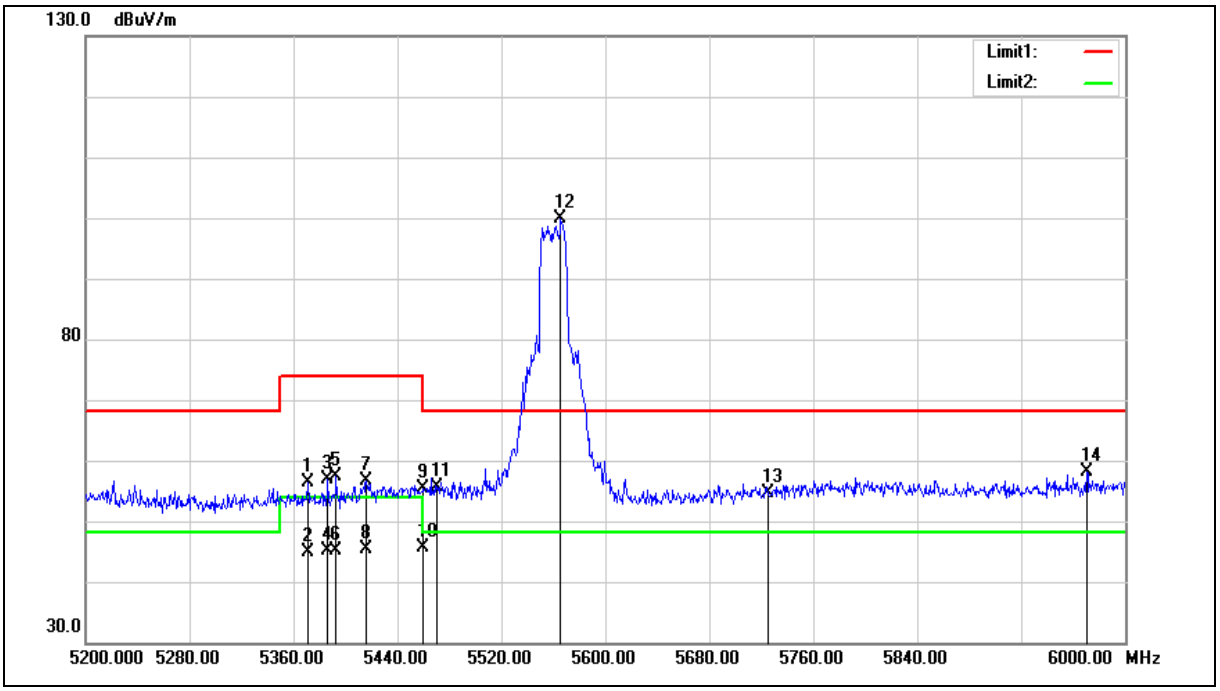

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5560 MHz		
Mode:	Mode 16		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5371.200	50.67	5.66	56.33	74.00	-17.67	peak
2	5371.200	39.13	5.66	44.79	54.00	-9.21	AVG
3	5386.400	51.11	5.70	56.81	74.00	-17.19	peak
4	5386.400	39.32	5.70	45.02	54.00	-8.98	AVG
5	5392.800	51.61	5.71	57.32	74.00	-16.68	peak
6	5392.800	39.36	5.71	45.07	54.00	-8.93	AVG
7	5416.000	50.81	5.77	56.58	74.00	-17.42	peak
8	5416.000	39.51	5.77	45.28	54.00	-8.72	AVG
9	5460.000	49.43	5.88	55.31	74.00	-18.69	peak
10	5460.000	39.87	5.88	45.75	54.00	-8.25	AVG
11	5470.000	49.73	5.91	55.64	68.20	-12.56	peak
12	5565.600	93.68	6.12	99.80	--	--	peak
13	5725.000	48.08	6.47	54.55	68.20	-13.65	peak
14	5970.400	50.99	7.02	58.01	68.20	-10.19	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5560 MHz		
Mode:	Mode 16		
Ant.Polar.:	Vertical		

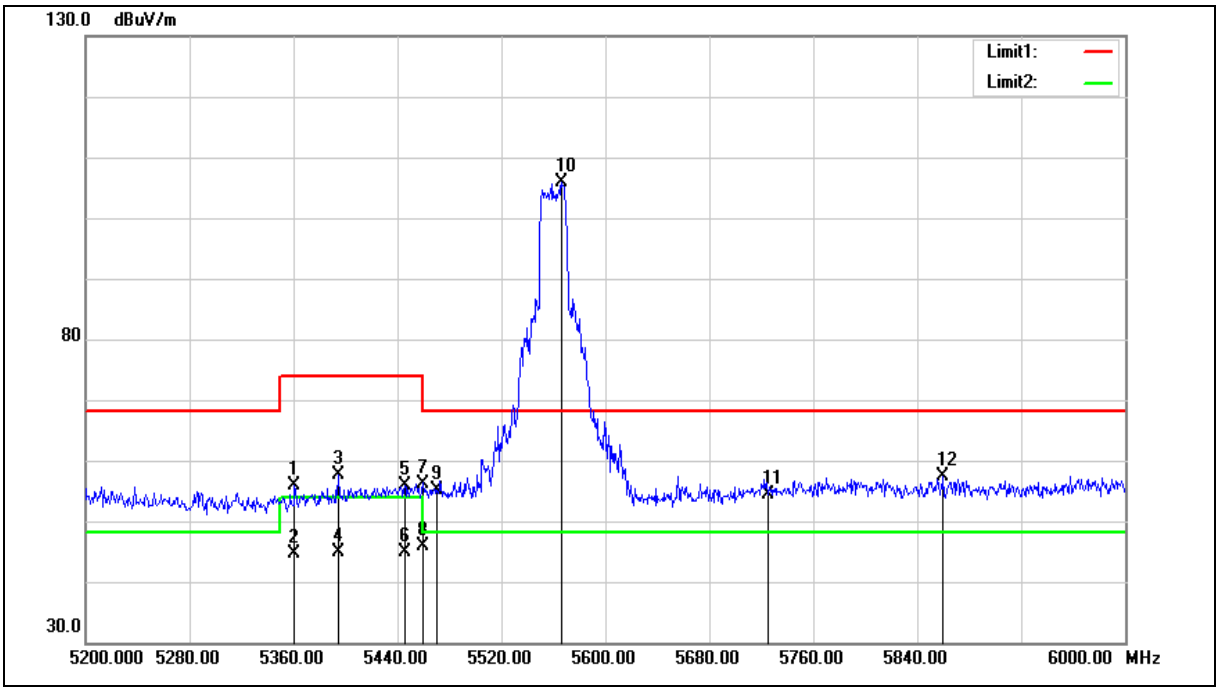

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5560 MHz		
Mode:	Mode 16		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5360.800	50.13	5.64	55.77	74.00	-18.23	peak
2	5360.800	38.89	5.64	44.53	54.00	-9.47	AVG
3	5394.400	51.86	5.72	57.58	74.00	-16.42	peak
4	5394.400	39.04	5.72	44.76	54.00	-9.24	AVG
5	5445.600	50.08	5.84	55.92	74.00	-18.08	peak
6	5445.600	39.05	5.84	44.89	54.00	-9.11	AVG
7	5460.000	50.22	5.88	56.10	74.00	-17.90	peak
8	5460.000	39.89	5.88	45.77	54.00	-8.23	AVG
9	5470.000	49.27	5.91	55.18	68.20	-13.02	peak
10	5566.400	99.69	6.13	105.82	--	--	peak
11	5725.000	47.94	6.47	54.41	68.20	-13.79	peak
12	5860.000	50.66	6.77	57.43	68.20	-10.77	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5700 MHz		
Mode:	Mode 16		
Ant.Polar.:	Horizontal		

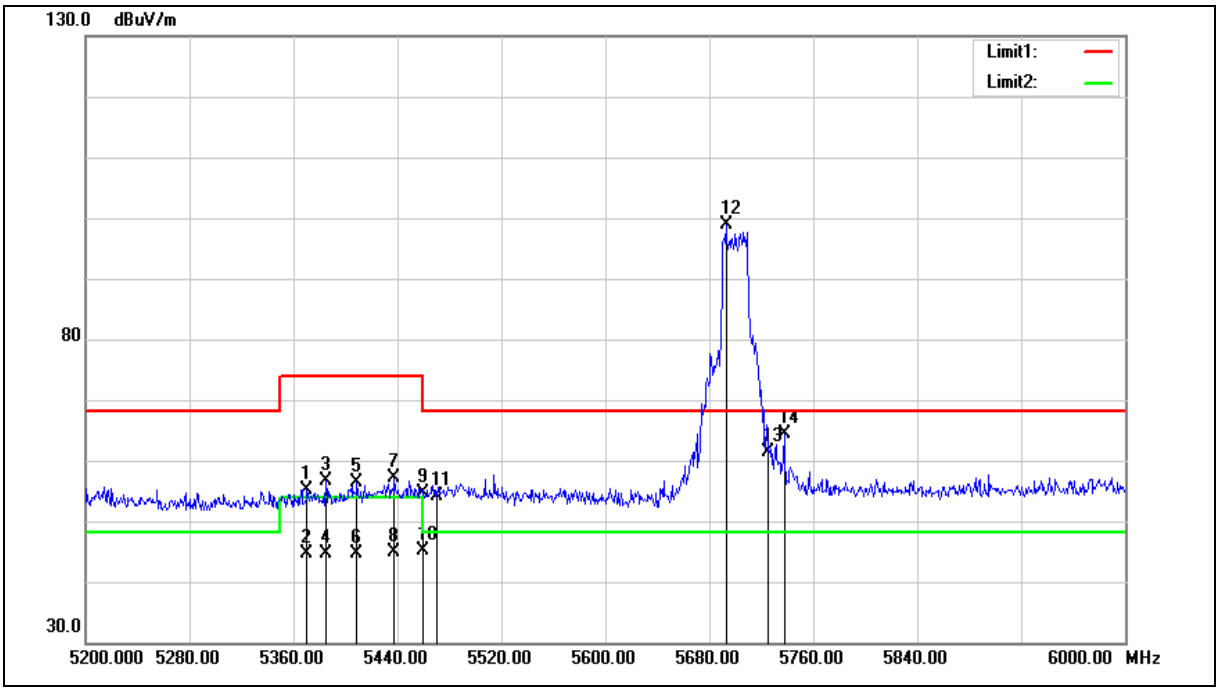

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5700 MHz		
Mode:	Mode 16		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5370.400	49.43	5.66	55.09	74.00	-18.91	peak
2	5370.400	38.90	5.66	44.56	54.00	-9.44	AVG
3	5384.800	50.91	5.69	56.60	74.00	-17.40	peak
4	5384.800	39.01	5.69	44.70	54.00	-9.30	AVG
5	5408.800	50.70	5.76	56.46	74.00	-17.54	peak
6	5408.800	38.83	5.76	44.59	54.00	-9.41	AVG
7	5437.600	51.27	5.82	57.09	74.00	-16.91	peak
8	5437.600	39.05	5.82	44.87	54.00	-9.13	AVG
9	5460.000	48.85	5.88	54.73	74.00	-19.27	peak
10	5460.000	39.13	5.88	45.01	54.00	-8.99	AVG
11	5470.000	48.25	5.91	54.16	68.20	-14.04	peak
12	5692.800	92.53	6.41	98.94	--	--	peak
13	5725.000	54.81	6.47	61.28	68.20	-6.92	peak
14	5737.600	57.83	6.50	64.33	68.20	-3.87	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5700 MHz		
Mode:	Mode 16		
Ant.Polar.:	Vertical		

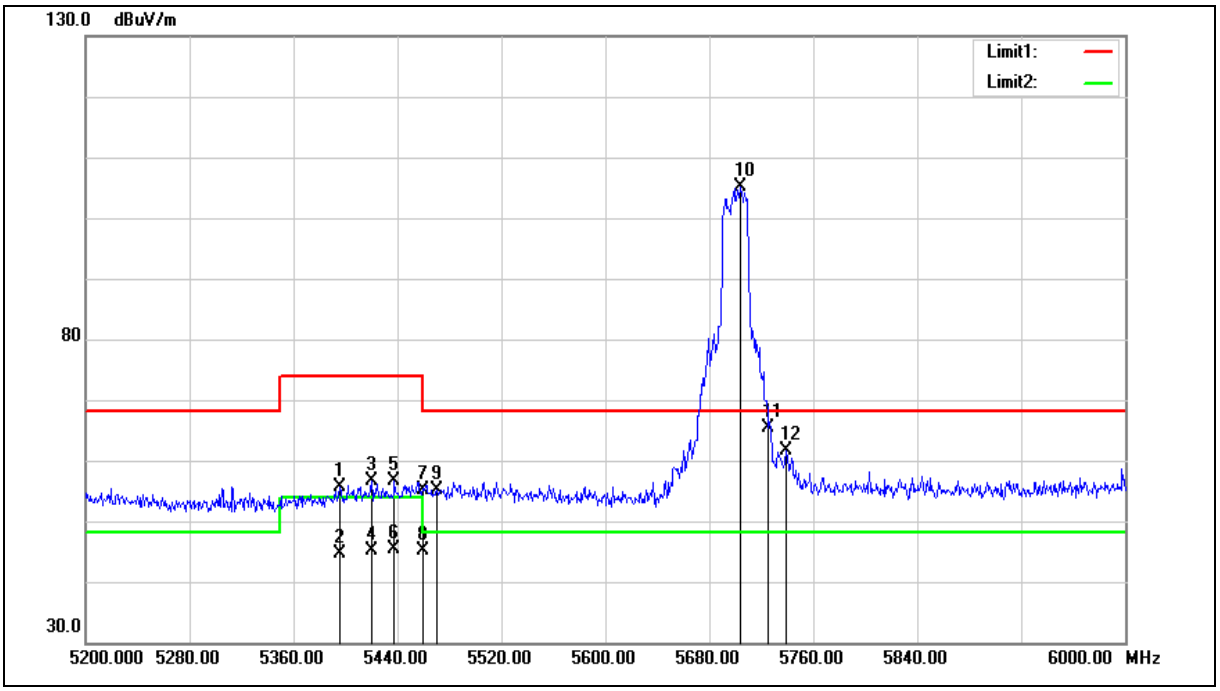

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5700 MHz		
Mode:	Mode 16		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5395.200	49.83	5.72	55.55	74.00	-18.45	peak
2	5395.200	38.96	5.72	44.68	54.00	-9.32	AVG
3	5420.000	50.77	5.79	56.56	74.00	-17.44	peak
4	5420.000	39.28	5.79	45.07	54.00	-8.93	AVG
5	5437.600	50.71	5.82	56.53	74.00	-17.47	peak
6	5437.600	39.54	5.82	45.36	54.00	-8.64	AVG
7	5460.000	49.36	5.88	55.24	74.00	-18.76	peak
8	5460.000	39.32	5.88	45.20	54.00	-8.80	AVG
9	5470.000	49.13	5.91	55.04	68.20	-13.16	peak
10	5704.000	98.64	6.43	105.07	--	--	peak
11	5725.000	58.89	6.47	65.36	68.20	-2.84	peak
12	5739.200	55.10	6.50	61.60	68.20	-6.60	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5745 MHz		
Mode:	Mode 16		
Ant.Polar.:	Horizontal		

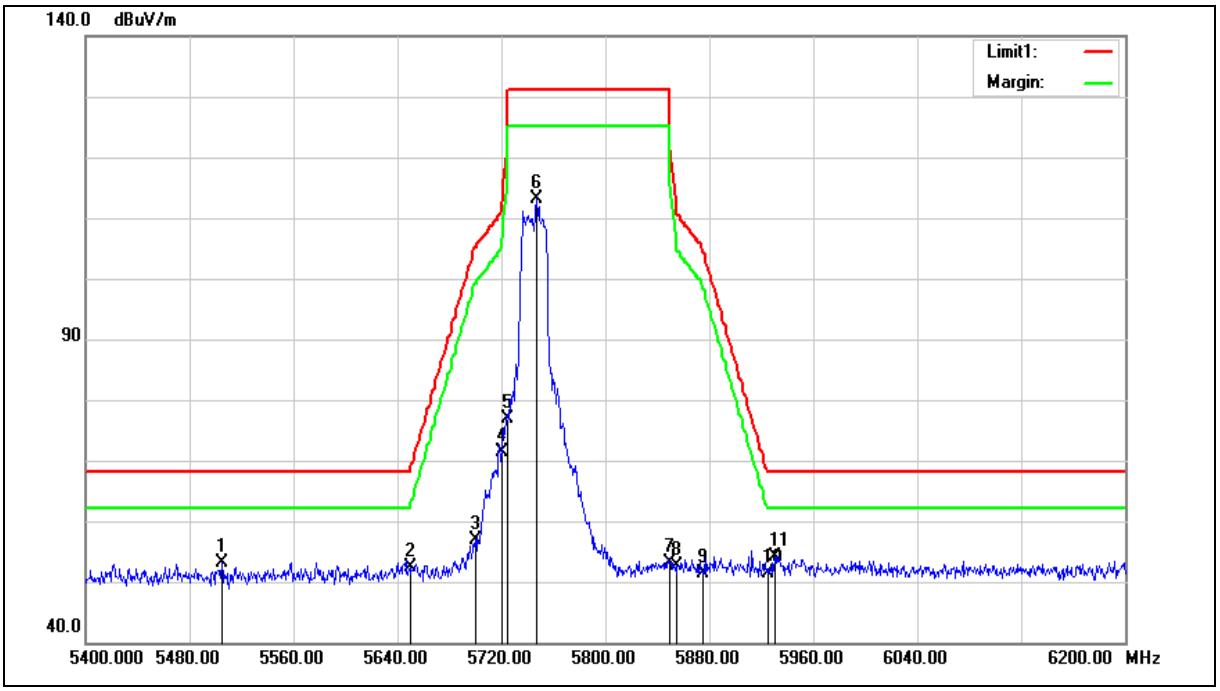

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5745 MHz		
Mode:	Mode 16		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5504.800	53.00	0.23	53.23	68.20	-14.97	peak
2	5650.000	51.79	0.62	52.41	68.20	-15.79	peak
3	5700.000	56.25	0.75	57.00	105.20	-48.20	peak
4	5720.000	70.49	0.81	71.30	110.80	-39.50	peak
5	5725.000	76.15	0.82	76.97	122.20	-45.23	peak
6	5747.200	112.20	0.89	113.09	--	--	peak
7	5850.000	51.91	1.17	53.08	122.20	-69.12	peak
8	5855.000	51.56	1.18	52.74	110.80	-58.06	peak
9	5875.000	50.17	1.23	51.40	105.20	-53.80	peak
10	5925.000	50.05	1.37	51.42	68.20	-16.78	peak
11	5930.400	52.86	1.38	54.24	68.20	-13.96	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5745 MHz		
Mode:	Mode 16		
Ant.Polar.:	Vertical		

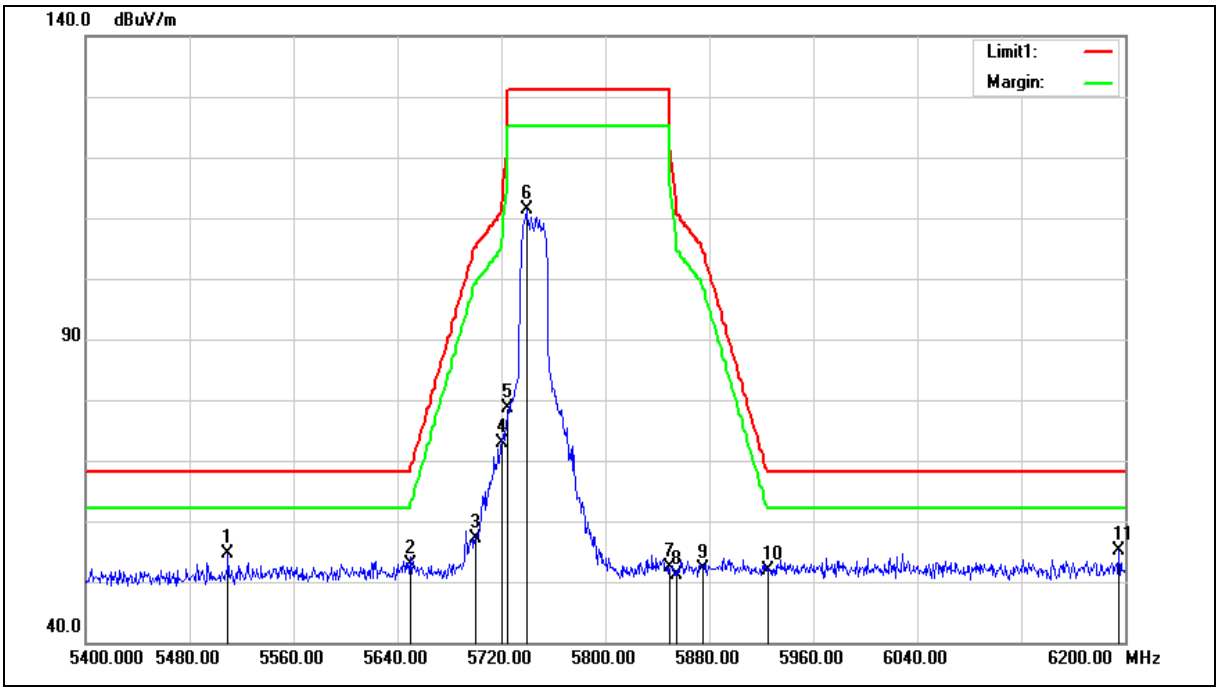

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5745 MHz		
Mode:	Mode 16		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5509.600	54.45	0.24	54.69	68.20	-13.51	peak
2	5650.000	52.17	0.62	52.79	68.20	-15.41	peak
3	5700.000	56.43	0.75	57.18	105.20	-48.02	peak
4	5720.000	72.04	0.81	72.85	110.80	-37.95	peak
5	5725.000	77.83	0.82	78.65	122.20	-43.55	peak
6	5739.200	110.58	0.86	111.44	--	--	peak
7	5850.000	51.17	1.17	52.34	122.20	-69.86	peak
8	5855.000	50.00	1.18	51.18	110.80	-59.62	peak
9	5875.000	50.98	1.23	52.21	105.20	-52.99	peak
10	5925.000	50.52	1.37	51.89	68.20	-16.31	peak
11	6195.200	52.76	2.26	55.02	68.20	-13.18	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5785 MHz		
Mode:	Mode 16		
Ant.Polar.:	Horizontal		

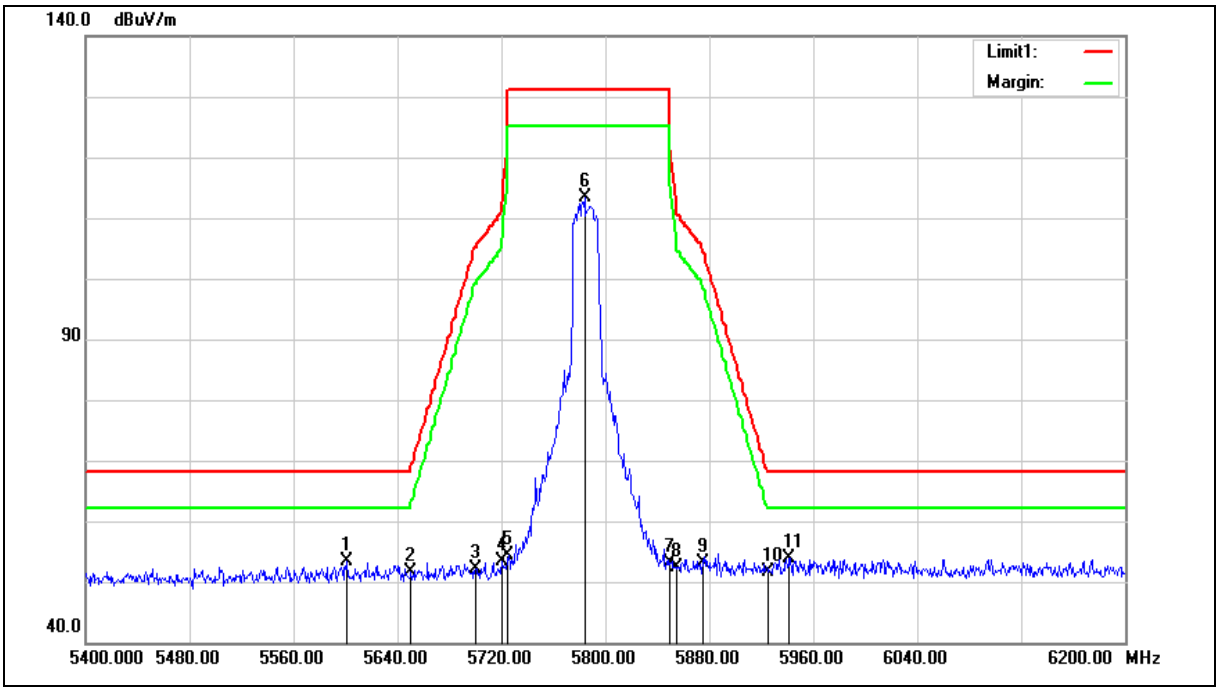

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5785 MHz		
Mode:	Mode 16		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5600.800	52.86	0.48	53.34	68.20	-14.86	peak
2	5650.000	50.92	0.62	51.54	68.20	-16.66	peak
3	5700.000	51.32	0.75	52.07	105.20	-53.13	peak
4	5720.000	52.57	0.81	53.38	110.80	-57.42	peak
5	5725.000	53.59	0.82	54.41	122.20	-67.79	peak
6	5784.000	112.50	0.98	113.48	--	--	peak
7	5850.000	51.90	1.17	53.07	122.20	-69.13	peak
8	5855.000	51.26	1.18	52.44	110.80	-58.36	peak
9	5875.000	51.85	1.23	53.08	105.20	-52.12	peak
10	5925.000	50.16	1.37	51.53	68.20	-16.67	peak
11	5941.600	52.50	1.42	53.92	68.20	-14.28	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5785 MHz		
Mode:	Mode 16		
Ant.Polar.:	Vertical		

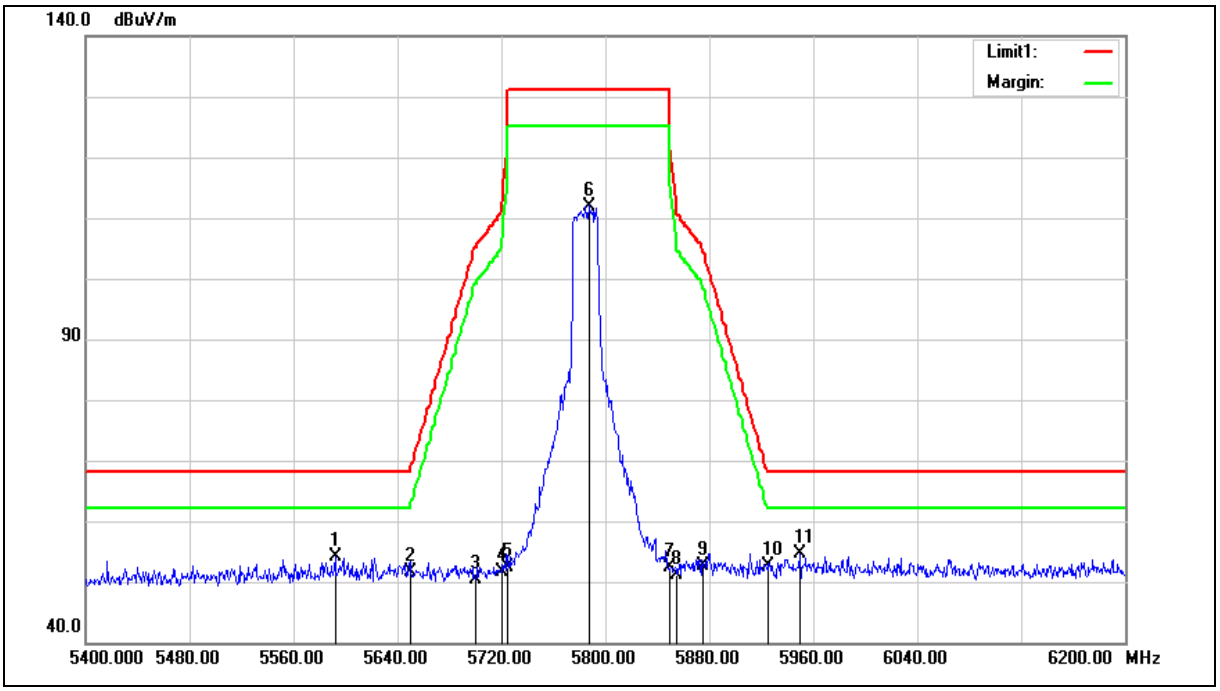

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5785 MHz		
Mode:	Mode 16		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5592.000	53.63	0.47	54.10	68.20	-14.10	peak
2	5650.000	50.91	0.62	51.53	68.20	-16.67	peak
3	5700.000	49.68	0.75	50.43	105.20	-54.77	peak
4	5720.000	50.82	0.81	51.63	110.80	-59.17	peak
5	5725.000	51.58	0.82	52.40	122.20	-69.80	peak
6	5787.200	111.00	0.99	111.99	--	--	peak
7	5850.000	51.29	1.17	52.46	122.20	-69.74	peak
8	5855.000	50.07	1.18	51.25	110.80	-59.55	peak
9	5875.000	51.40	1.23	52.63	105.20	-52.57	peak
10	5925.000	51.29	1.37	52.66	68.20	-15.54	peak
11	5949.600	53.19	1.44	54.63	68.20	-13.57	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5825 MHz		
Mode:	Mode 16		
Ant.Polar.:	Horizontal		

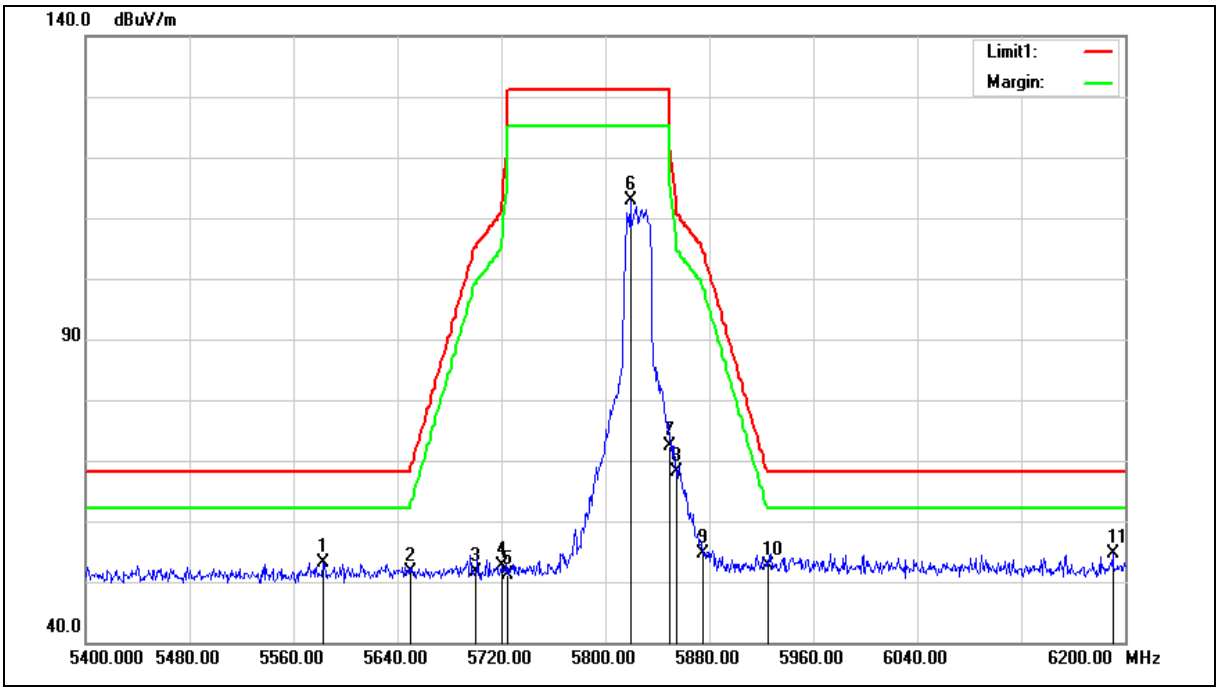

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5825 MHz		
Mode:	Mode 16		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5583.200	52.78	0.43	53.21	68.20	-14.99	peak
2	5650.000	51.11	0.62	51.73	68.20	-16.47	peak
3	5700.000	50.91	0.75	51.66	105.20	-53.54	peak
4	5720.000	51.88	0.81	52.69	110.80	-58.11	peak
5	5725.000	50.32	0.82	51.14	122.20	-71.06	peak
6	5819.200	111.85	1.08	112.93	--	--	peak
7	5850.000	71.14	1.17	72.31	122.20	-49.89	peak
8	5855.000	66.96	1.18	68.14	110.80	-42.66	peak
9	5875.000	53.34	1.23	54.57	105.20	-50.63	peak
10	5925.000	51.29	1.37	52.66	68.20	-15.54	peak
11	6190.400	52.35	2.24	54.59	68.20	-13.61	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5825 MHz		
Mode:	Mode 16		
Ant.Polar.:	Vertical		

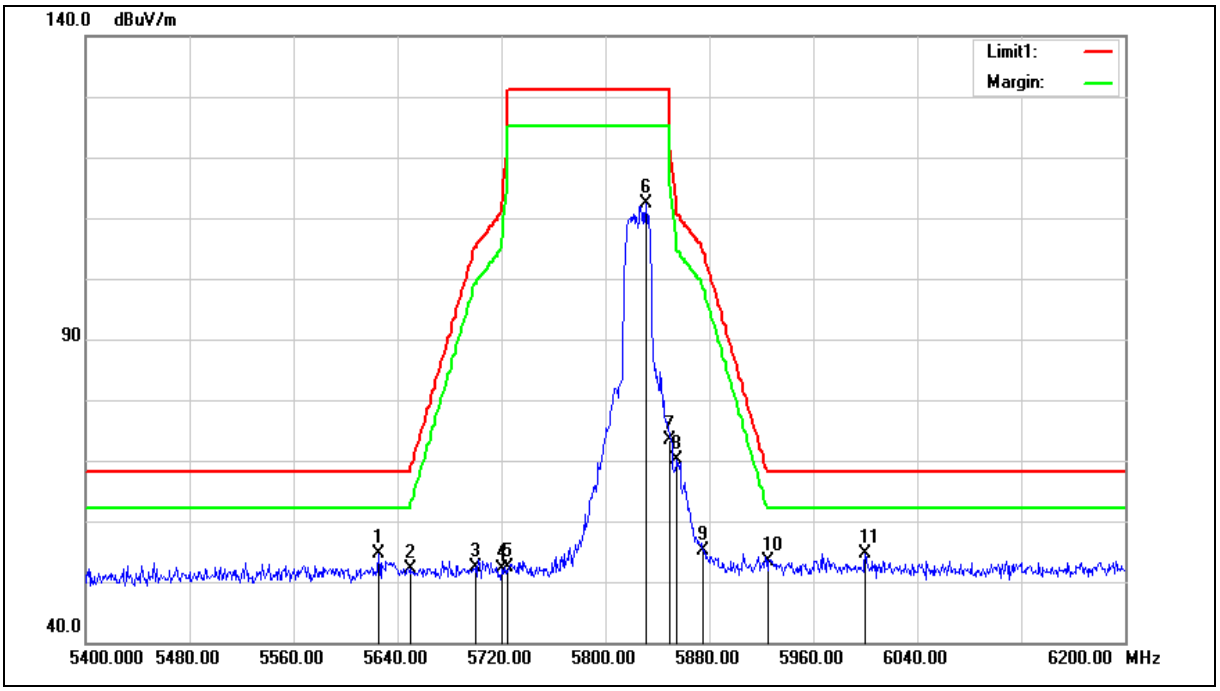

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5825 MHz		
Mode:	Mode 16		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5625.600	54.08	0.55	54.63	68.20	-13.57	peak
2	5650.000	51.54	0.62	52.16	68.20	-16.04	peak
3	5700.000	51.66	0.75	52.41	105.20	-52.79	peak
4	5720.000	51.36	0.81	52.17	110.80	-58.63	peak
5	5725.000	51.53	0.82	52.35	122.20	-69.85	peak
6	5831.200	111.17	1.11	112.28	--	--	peak
7	5850.000	72.11	1.17	73.28	122.20	-48.92	peak
8	5855.000	68.89	1.18	70.07	110.80	-40.73	peak
9	5875.000	53.78	1.23	55.01	105.20	-50.19	peak
10	5925.000	52.09	1.37	53.46	68.20	-14.74	peak
11	6000.000	53.16	1.57	54.73	68.20	-13.47	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5190 MHz		
Mode:	Mode 17		
Ant.Polar.:	Horizontal		

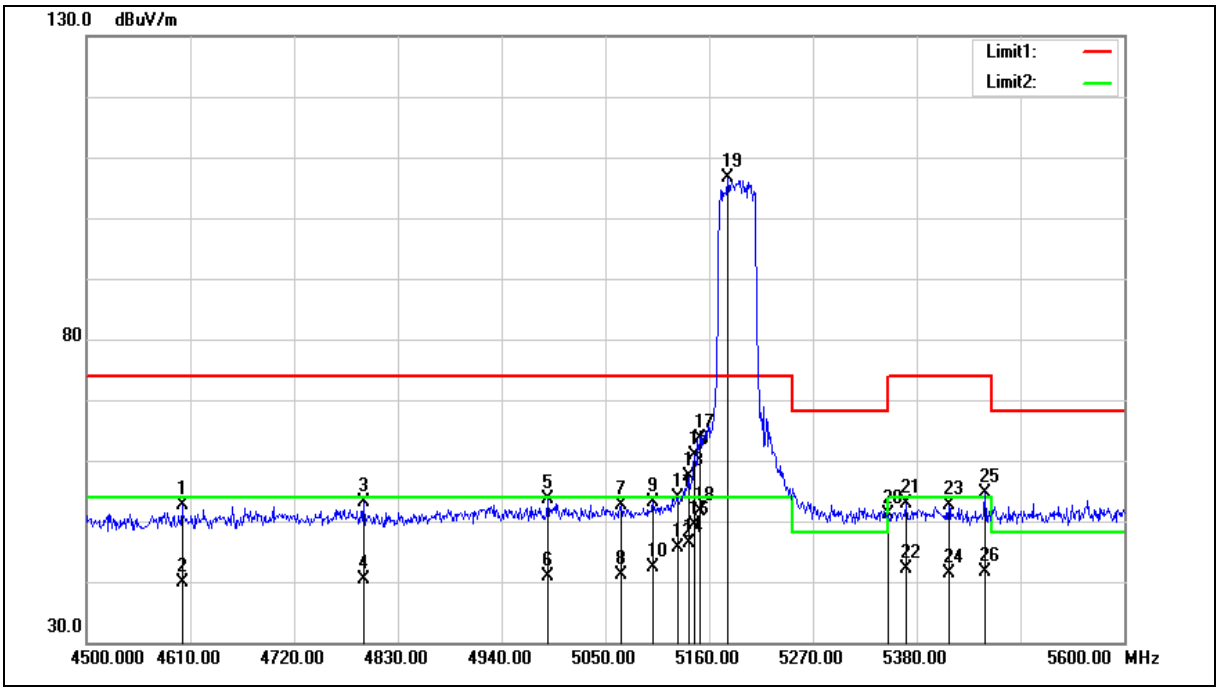

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5190 MHz		
Mode:	Mode 17		
Ant.Polar.:	Horizontal		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4601.200	54.41	-1.87	52.54	74.00	-21.46	peak
2	4601.200	41.72	-1.87	39.85	54.00	-14.15	AVG
3	4793.700	54.40	-1.34	53.06	74.00	-20.94	peak
4	4793.700	41.73	-1.34	40.39	54.00	-13.61	AVG
5	4989.500	54.37	-0.80	53.57	74.00	-20.43	peak
6	4989.500	41.69	-0.80	40.89	54.00	-13.11	AVG
7	5066.500	53.34	-0.64	52.70	74.00	-21.30	peak
8	5066.500	41.69	-0.64	41.05	54.00	-12.95	AVG
9	5100.600	53.68	-0.57	53.11	74.00	-20.89	peak
10	5100.600	42.94	-0.57	42.37	54.00	-11.63	AVG
11	5127.000	54.42	-0.52	53.90	74.00	-20.10	peak
12	5127.000	46.23	-0.52	45.71	54.00	-8.29	AVG
13	5138.000	57.97	-0.49	57.48	74.00	-16.52	peak
14	5138.000	46.84	-0.49	46.35	54.00	-7.65	AVG
15	5144.600	61.44	-0.48	60.96	74.00	-13.04	peak
16	5144.600	49.93	-0.48	49.45	54.00	-4.55	AVG
17	5150.000	64.18	-0.48	63.70	74.00	-10.30	peak
18	5150.000	52.21	-0.48	51.73	54.00	-2.27	AVG
19	5179.800	107.03	-0.42	106.61	--	--	peak
20	5350.000	51.20	-0.08	51.12	74.00	-22.88	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5190 MHz		
Mode:	Mode 17		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
21	5369.000	52.88	-0.04	52.84	74.00	-21.16	peak
22	5369.000	42.06	-0.04	42.02	54.00	-11.98	AVG
23	5414.100	52.53	0.05	52.58	74.00	-21.42	peak
24	5414.100	41.37	0.05	41.42	54.00	-12.58	AVG
25	5452.600	54.42	0.12	54.54	74.00	-19.46	peak
26	5452.600	41.60	0.12	41.72	54.00	-12.28	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5190 MHz		
Mode:	Mode 17		
Ant.Polar.:	Vertical		

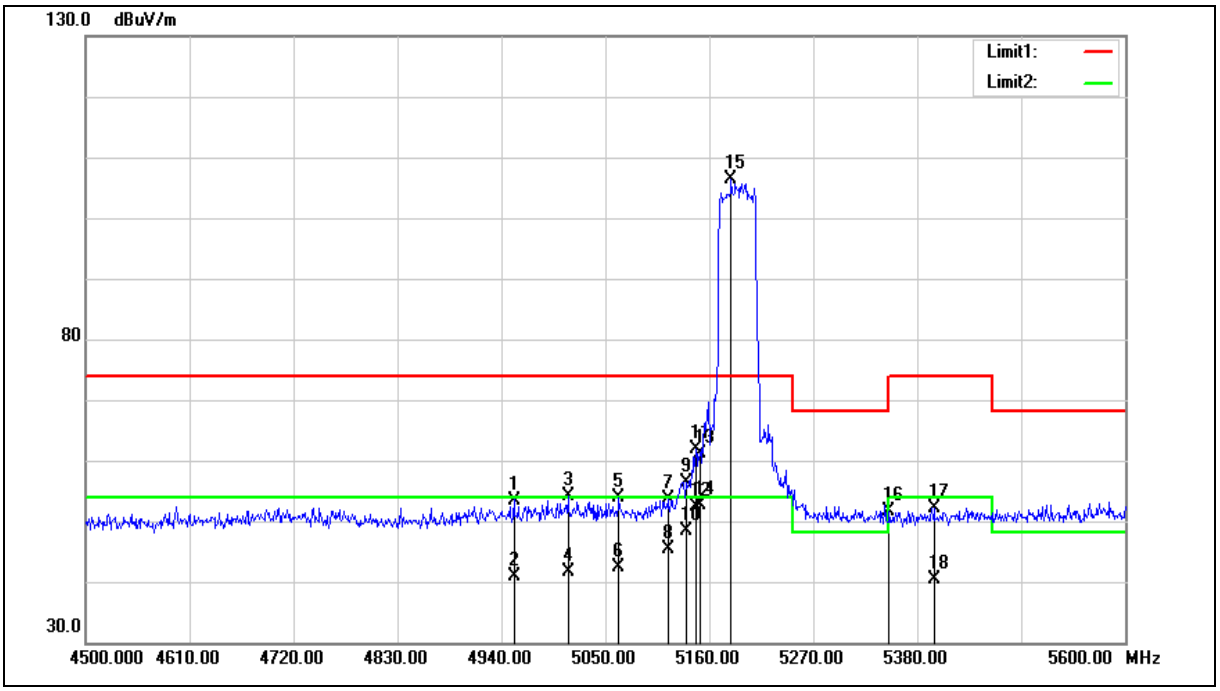

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5190 MHz		
Mode:	Mode 17		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4953.200	54.39	-0.89	53.50	74.00	-20.50	peak
2	4953.200	41.72	-0.89	40.83	54.00	-13.17	AVG
3	5010.400	54.80	-0.75	54.05	74.00	-19.95	peak
4	5010.400	42.34	-0.75	41.59	54.00	-12.41	AVG
5	5064.300	54.46	-0.65	53.81	74.00	-20.19	peak
6	5064.300	43.12	-0.65	42.47	54.00	-11.53	AVG
7	5116.000	54.07	-0.54	53.53	74.00	-20.47	peak
8	5116.000	45.90	-0.54	45.36	54.00	-8.64	AVG
9	5135.800	56.84	-0.50	56.34	74.00	-17.66	peak
10	5135.800	48.77	-0.50	48.27	54.00	-5.73	AVG
11	5145.700	62.44	-0.48	61.96	74.00	-12.04	peak
12	5145.700	52.94	-0.48	52.46	54.00	-1.54	AVG
13	5150.000	61.68	-0.48	61.20	74.00	-12.80	peak
14	5150.000	53.05	-0.48	52.57	54.00	-1.43	AVG
15	5183.100	106.87	-0.40	106.47	--	--	peak
16	5350.000	51.69	-0.08	51.61	74.00	-22.39	peak
17	5397.600	52.20	0.01	52.21	74.00	-21.79	peak
18	5397.600	40.37	0.01	40.38	54.00	-13.62	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5230 MHz		
Mode:	Mode 17		
Ant.Polar.:	Horizontal		

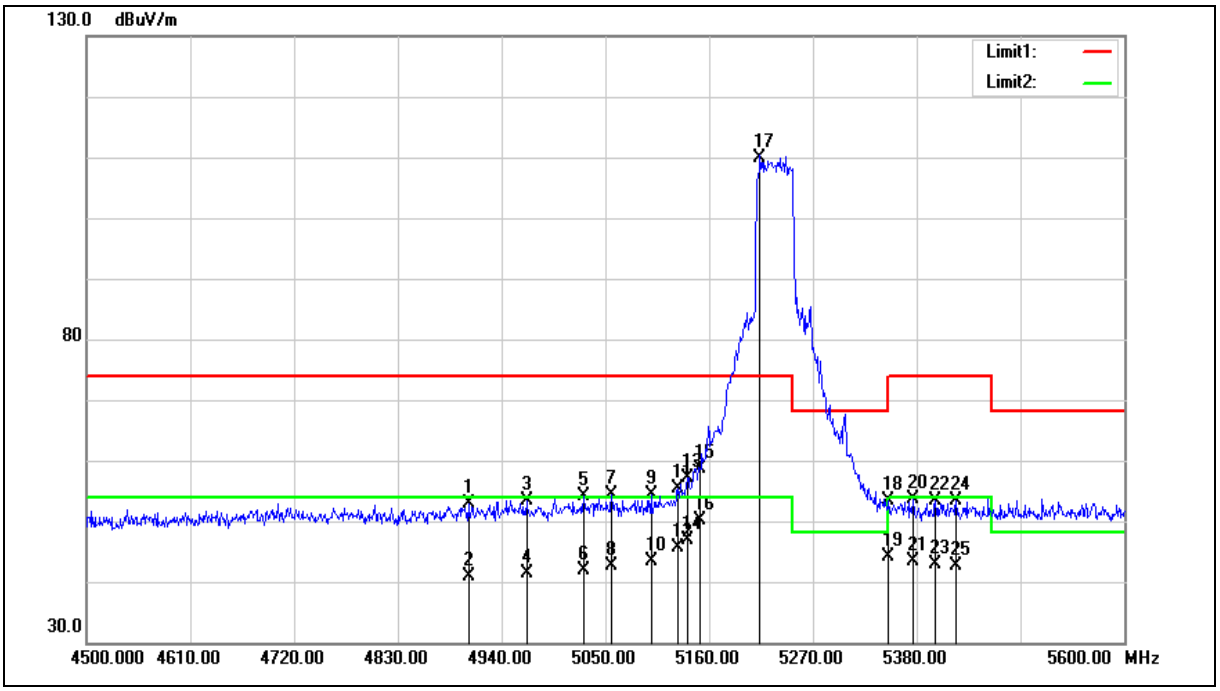

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5230 MHz		
Mode:	Mode 17		
Ant.Polar.:	Horizontal		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4904.800	53.81	-1.03	52.78	74.00	-21.22	peak
2	4904.800	42.00	-1.03	40.97	54.00	-13.03	AVG
3	4966.400	54.20	-0.87	53.33	74.00	-20.67	peak
4	4966.400	42.26	-0.87	41.39	54.00	-12.61	AVG
5	5026.900	54.93	-0.72	54.21	74.00	-19.79	peak
6	5026.900	42.65	-0.72	41.93	54.00	-12.07	AVG
7	5056.600	55.14	-0.65	54.49	74.00	-19.51	peak
8	5056.600	43.30	-0.65	42.65	54.00	-11.35	AVG
9	5098.400	54.89	-0.57	54.32	74.00	-19.68	peak
10	5098.400	44.06	-0.57	43.49	54.00	-10.51	AVG
11	5127.000	55.98	-0.52	55.46	74.00	-18.54	peak
12	5127.000	46.26	-0.52	45.74	54.00	-8.26	AVG
13	5136.900	57.56	-0.50	57.06	74.00	-16.94	peak
14	5136.900	47.48	-0.50	46.98	54.00	-7.02	AVG
15	5150.000	59.20	-0.48	58.72	74.00	-15.28	peak
16	5150.000	50.71	-0.48	50.23	54.00	-3.77	AVG
17	5213.900	110.17	-0.35	109.82	--	--	peak
18	5350.000	53.51	-0.08	53.43	74.00	-20.57	peak
19	5350.000	44.11	-0.08	44.03	54.00	-9.97	AVG
20	5376.700	53.71	-0.03	53.68	74.00	-20.32	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5230 MHz		
Mode:	Mode 17		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
21	5376.700	43.52	-0.03	43.49	54.00	-10.51	AVG
22	5399.800	53.26	0.02	53.28	74.00	-20.72	peak
23	5399.800	42.89	0.02	42.91	54.00	-11.09	AVG
24	5421.800	53.22	0.06	53.28	74.00	-20.72	peak
25	5421.800	42.59	0.06	42.65	54.00	-11.35	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5230 MHz		
Mode:	Mode 17		
Ant.Polar.:	Vertical		

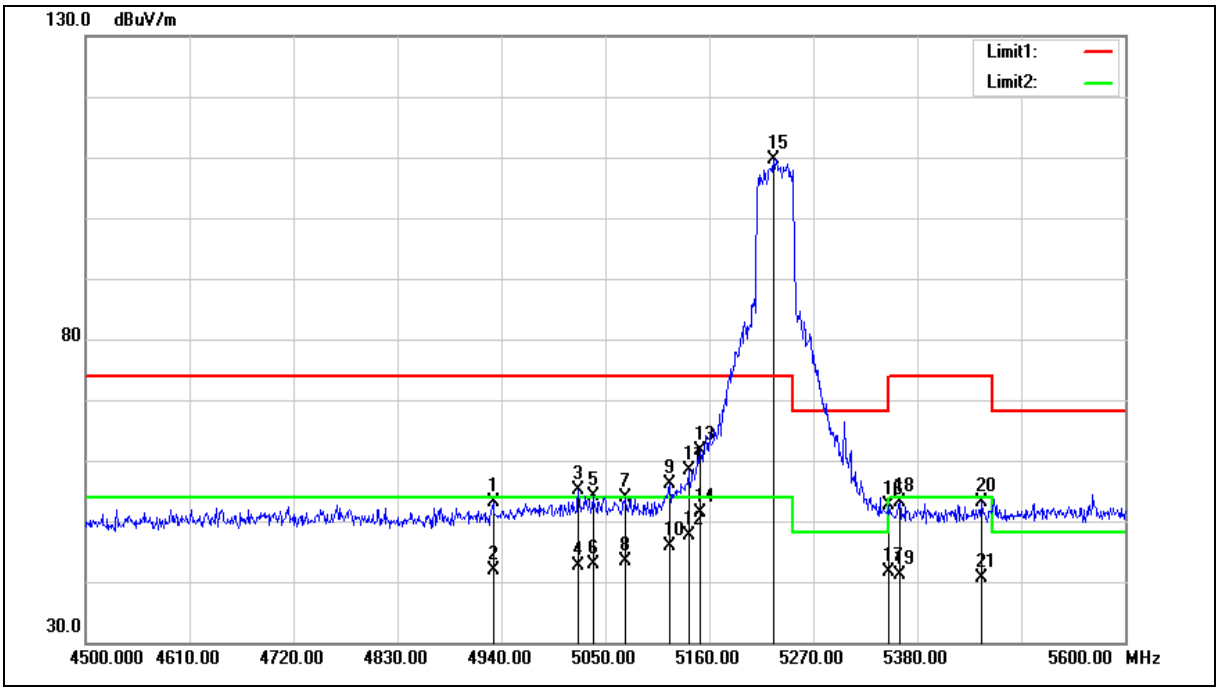

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5230 MHz		
Mode:	Mode 17		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4931.200	54.04	-0.95	53.09	74.00	-20.91	peak
2	4931.200	42.77	-0.95	41.82	54.00	-12.18	AVG
3	5021.400	55.78	-0.73	55.05	74.00	-18.95	peak
4	5021.400	43.38	-0.73	42.65	54.00	-11.35	AVG
5	5036.800	54.72	-0.69	54.03	74.00	-19.97	peak
6	5036.800	43.48	-0.69	42.79	54.00	-11.21	AVG
7	5070.900	54.44	-0.63	53.81	74.00	-20.19	peak
8	5070.900	44.10	-0.63	43.47	54.00	-10.53	AVG
9	5118.200	56.66	-0.54	56.12	74.00	-17.88	peak
10	5118.200	46.43	-0.54	45.89	54.00	-8.11	AVG
11	5138.000	58.75	-0.49	58.26	74.00	-15.74	peak
12	5138.000	48.03	-0.49	47.54	54.00	-6.46	AVG
13	5150.000	62.01	-0.48	61.53	74.00	-12.47	peak
14	5150.000	51.90	-0.48	51.42	54.00	-2.58	AVG
15	5228.200	110.02	-0.32	109.70	--	--	peak
16	5350.000	52.60	-0.08	52.52	74.00	-21.48	peak
17	5350.000	41.79	-0.08	41.71	54.00	-12.29	AVG
18	5361.300	53.20	-0.06	53.14	74.00	-20.86	peak
19	5361.300	41.12	-0.06	41.06	54.00	-12.94	AVG
20	5448.200	52.89	0.12	53.01	74.00	-20.99	peak
21	5448.200	40.49	0.12	40.61	54.00	-13.39	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5270 MHz		
Mode:	Mode 17		
Ant.Polar.:	Horizontal		

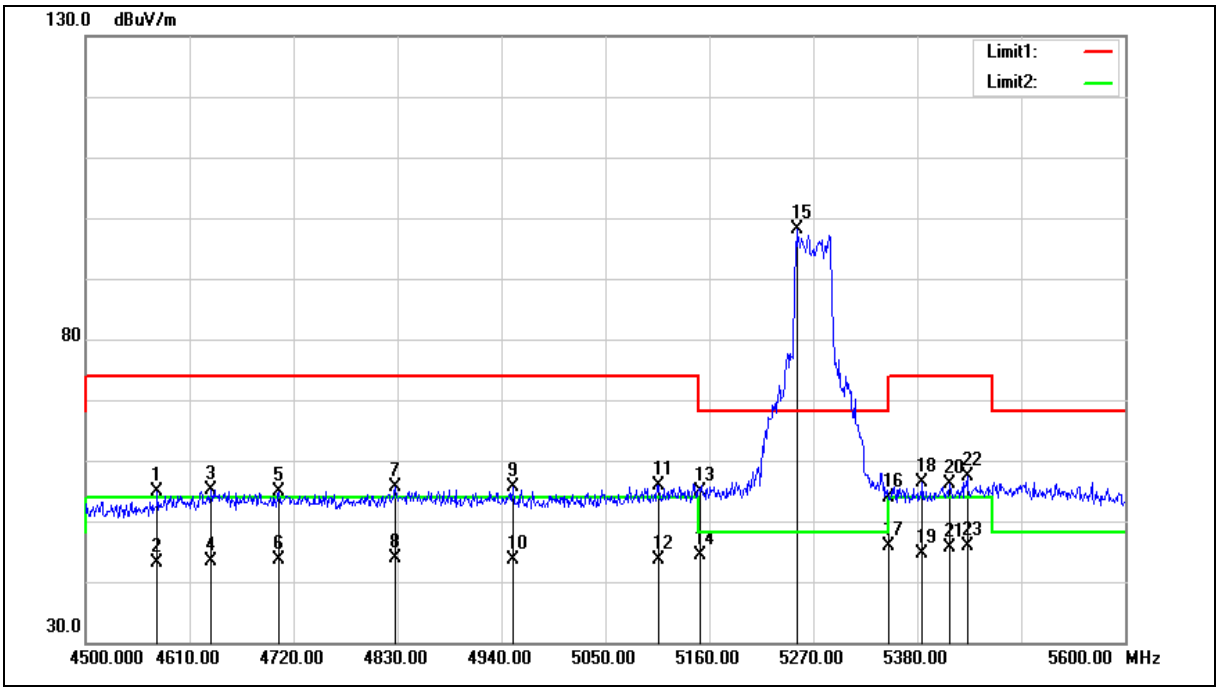

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5270 MHz		
Mode:	Mode 17		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4575.900	51.11	3.67	54.78	74.00	-19.22	peak
2	4575.900	39.58	3.67	43.25	54.00	-10.75	AVG
3	4633.100	51.26	3.81	55.07	74.00	-18.93	peak
4	4633.100	39.68	3.81	43.49	54.00	-10.51	AVG
5	4704.600	50.98	4.00	54.98	74.00	-19.02	peak
6	4704.600	39.73	4.00	43.73	54.00	-10.27	AVG
7	4827.800	51.21	4.31	55.52	74.00	-18.48	peak
8	4827.800	39.68	4.31	43.99	54.00	-10.01	AVG
9	4952.100	51.07	4.63	55.70	74.00	-18.30	peak
10	4952.100	39.05	4.63	43.68	54.00	-10.32	AVG
11	5106.100	50.96	5.00	55.96	74.00	-18.04	peak
12	5106.100	38.67	5.00	43.67	54.00	-10.33	AVG
13	5150.000	49.74	5.12	54.86	74.00	-19.14	peak
14	5150.000	39.18	5.12	44.30	54.00	-9.70	AVG
15	5252.400	92.78	5.36	98.14	--	--	peak
16	5350.000	48.18	5.61	53.79	74.00	-20.21	peak
17	5350.000	40.33	5.61	45.94	54.00	-8.06	AVG
18	5385.500	50.68	5.69	56.37	74.00	-17.63	peak
19	5385.500	38.83	5.69	44.52	54.00	-9.48	AVG
20	5414.100	50.44	5.77	56.21	74.00	-17.79	peak
21	5414.100	39.91	5.77	45.68	54.00	-8.32	AVG
22	5432.800	51.46	5.82	57.28	74.00	-16.72	peak
23	5432.800	39.97	5.82	45.79	54.00	-8.21	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5270 MHz		
Mode:	Mode 17		
Ant.Polar.:	Vertical		

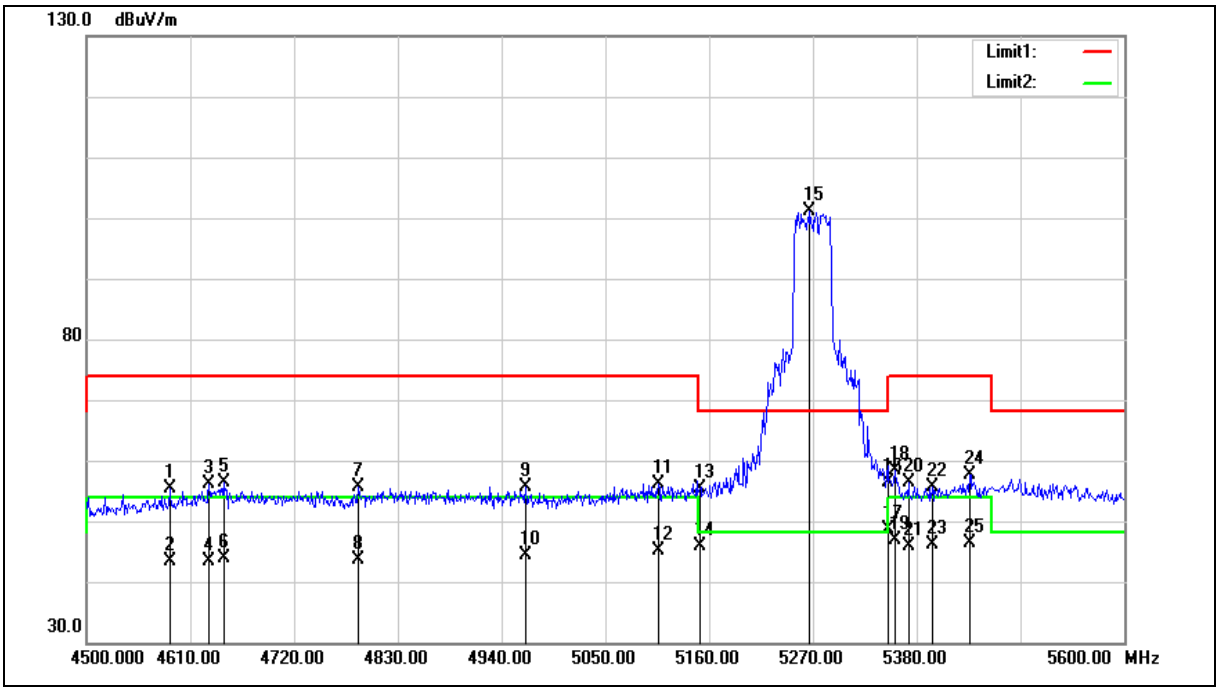

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5270 MHz		
Mode:	Mode 17		
Ant.Polar.:	Vertical		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4588.000	51.63	3.70	55.33	74.00	-18.67	peak
2	4588.000	39.62	3.70	43.32	54.00	-10.68	AVG
3	4629.800	52.26	3.81	56.07	74.00	-17.93	peak
4	4629.800	39.66	3.81	43.47	54.00	-10.53	AVG
5	4645.200	52.64	3.84	56.48	74.00	-17.52	peak
6	4645.200	40.15	3.84	43.99	54.00	-10.01	AVG
7	4788.200	51.42	4.21	55.63	74.00	-18.37	peak
8	4788.200	39.50	4.21	43.71	54.00	-10.29	AVG
9	4965.300	50.91	4.66	55.57	74.00	-18.43	peak
10	4965.300	39.71	4.66	44.37	54.00	-9.63	AVG
11	5106.100	51.20	5.00	56.20	74.00	-17.80	peak
12	5106.100	40.08	5.00	45.08	54.00	-8.92	AVG
13	5150.000	50.29	5.12	55.41	74.00	-18.59	peak
14	5150.000	40.66	5.12	45.78	54.00	-8.22	AVG
15	5266.700	95.64	5.40	101.04	--	--	peak
16	5350.000	50.77	5.61	56.38	74.00	-17.62	peak
17	5350.000	42.92	5.61	48.53	54.00	-5.47	AVG
18	5356.900	52.82	5.63	58.45	74.00	-15.55	peak
19	5356.900	41.32	5.63	46.95	54.00	-7.05	AVG
20	5371.200	50.68	5.66	56.34	74.00	-17.66	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5270 MHz		
Mode:	Mode 17		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
21	5371.200	40.10	5.66	45.76	54.00	-8.24	AVG
22	5396.500	49.83	5.72	55.55	74.00	-18.45	peak
23	5396.500	40.39	5.72	46.11	54.00	-7.89	AVG
24	5436.100	51.81	5.81	57.62	74.00	-16.38	peak
25	5436.100	40.54	5.81	46.35	54.00	-7.65	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5310 MHz		
Mode:	Mode 17		
Ant.Polar.:	Horizontal		

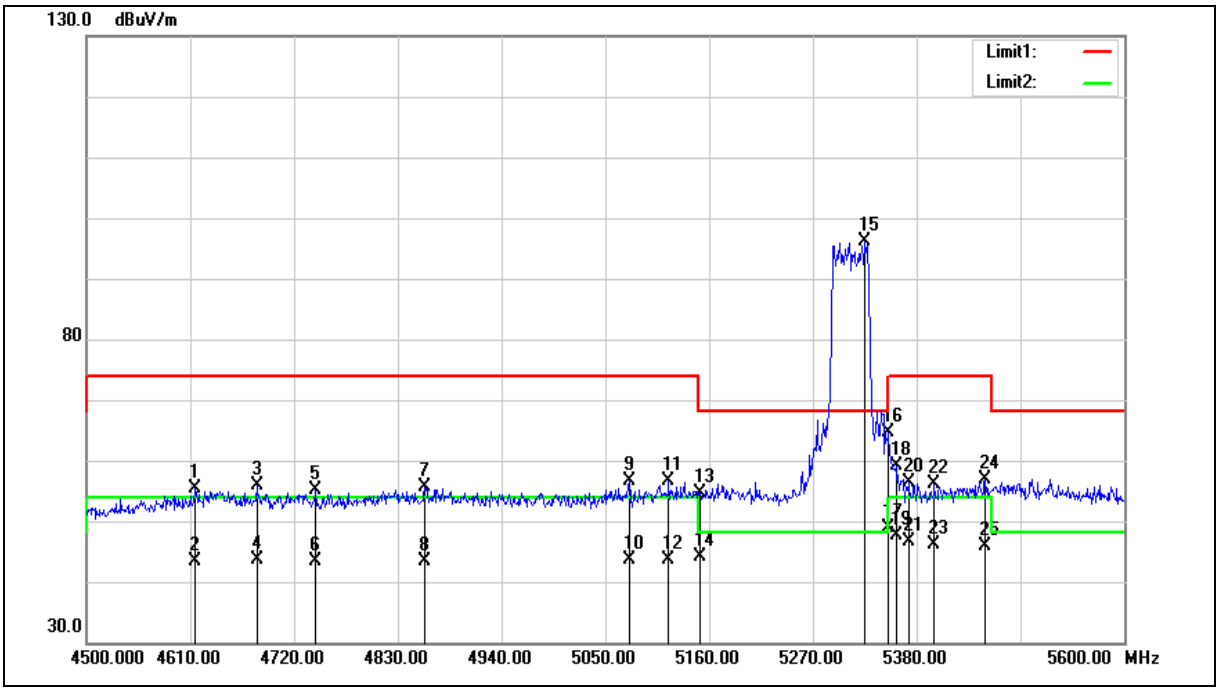

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5310 MHz		
Mode:	Mode 17		
Ant.Polar.:	Horizontal		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4614.400	51.59	3.77	55.36	74.00	-18.64	peak
2	4614.400	39.50	3.77	43.27	54.00	-10.73	AVG
3	4680.400	51.89	3.94	55.83	74.00	-18.17	peak
4	4680.400	39.60	3.94	43.54	54.00	-10.46	AVG
5	4743.100	50.92	4.10	55.02	74.00	-18.98	peak
6	4743.100	39.24	4.10	43.34	54.00	-10.66	AVG
7	4858.600	51.35	4.39	55.74	74.00	-18.26	peak
8	4858.600	39.07	4.39	43.46	54.00	-10.54	AVG
9	5075.300	51.77	4.94	56.71	74.00	-17.29	peak
10	5075.300	38.74	4.94	43.68	54.00	-10.32	AVG
11	5117.100	51.62	5.03	56.65	74.00	-17.35	peak
12	5117.100	38.68	5.03	43.71	54.00	-10.29	AVG
13	5150.000	49.54	5.12	54.66	74.00	-19.34	peak
14	5150.000	38.93	5.12	44.05	54.00	-9.95	AVG
15	5325.000	90.61	5.55	96.16	--	--	peak
16	5350.000	58.93	5.61	64.54	74.00	-9.46	peak
17	5350.000	43.25	5.61	48.86	54.00	-5.14	AVG
18	5358.000	53.39	5.63	59.02	74.00	-14.98	peak
19	5358.000	41.88	5.63	47.51	54.00	-6.49	AVG
20	5371.200	50.84	5.66	56.50	74.00	-17.50	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5310 MHz		
Mode:	Mode 17		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
21	5371.200	41.04	5.66	46.70	54.00	-7.30	AVG
22	5398.700	50.37	5.73	56.10	74.00	-17.90	peak
23	5398.700	40.35	5.73	46.08	54.00	-7.92	AVG
24	5452.600	51.00	5.85	56.85	74.00	-17.15	peak
25	5452.600	40.01	5.85	45.86	54.00	-8.14	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5310 MHz		
Mode:	Mode 17		
Ant.Polar.:	Vertical		

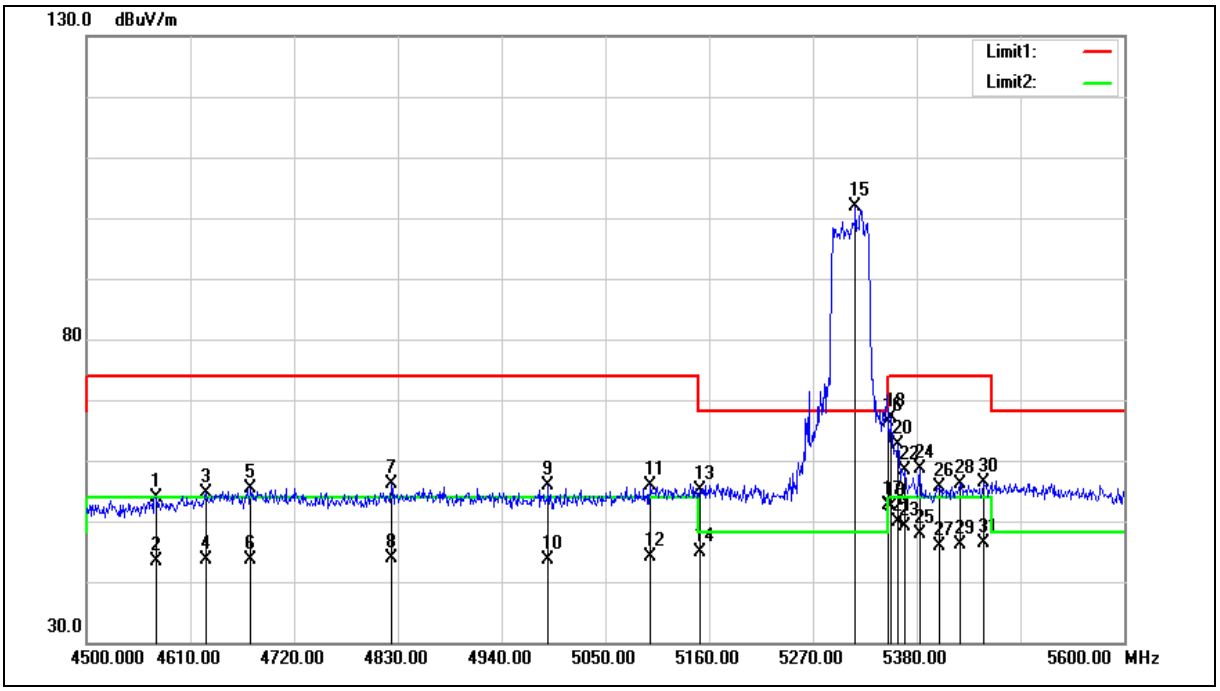

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5310 MHz		
Mode:	Mode 17		
Ant.Polar.:	Vertical		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4573.700	50.25	3.67	53.92	74.00	-20.08	peak
2	4573.700	39.79	3.67	43.46	54.00	-10.54	AVG
3	4626.500	50.81	3.80	54.61	74.00	-19.39	peak
4	4626.500	39.79	3.80	43.59	54.00	-10.41	AVG
5	4673.800	51.38	3.92	55.30	74.00	-18.70	peak
6	4673.800	39.74	3.92	43.66	54.00	-10.34	AVG
7	4823.400	51.86	4.31	56.17	74.00	-17.83	peak
8	4823.400	39.49	4.31	43.80	54.00	-10.20	AVG
9	4989.500	51.11	4.72	55.83	74.00	-18.17	peak
10	4989.500	38.82	4.72	43.54	54.00	-10.46	AVG
11	5097.300	50.95	5.00	55.95	74.00	-18.05	peak
12	5097.300	39.07	5.00	44.07	54.00	-9.93	AVG
13	5150.000	49.90	5.12	55.02	74.00	-18.98	peak
14	5150.000	39.80	5.12	44.92	54.00	-9.08	AVG
15	5315.100	96.37	5.52	101.89	--	--	peak
16	5350.000	60.80	5.61	66.41	74.00	-7.59	peak
17	5350.000	47.05	5.61	52.66	54.00	-1.34	AVG
18	5352.500	61.46	5.61	67.07	74.00	-6.93	peak
19	5352.500	46.73	5.61	52.34	54.00	-1.66	AVG
20	5360.200	56.94	5.64	62.58	74.00	-11.42	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5310 MHz		
Mode:	Mode 17		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
21	5360.200	44.33	5.64	49.97	54.00	-4.03	AVG
22	5367.900	52.78	5.64	58.42	74.00	-15.58	peak
23	5367.900	43.49	5.64	49.13	54.00	-4.87	AVG
24	5383.300	52.86	5.69	58.55	74.00	-15.45	peak
25	5383.300	42.17	5.69	47.86	54.00	-6.14	AVG
26	5404.200	49.82	5.74	55.56	74.00	-18.44	peak
27	5404.200	40.25	5.74	45.99	54.00	-8.01	AVG
28	5426.200	50.34	5.80	56.14	74.00	-17.86	peak
29	5426.200	40.22	5.80	46.02	54.00	-7.98	AVG
30	5451.500	50.49	5.85	56.34	74.00	-17.66	peak
31	5451.500	40.45	5.85	46.30	54.00	-7.70	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5510 MHz		
Mode:	Mode 17		
Ant.Polar.:	Horizontal		

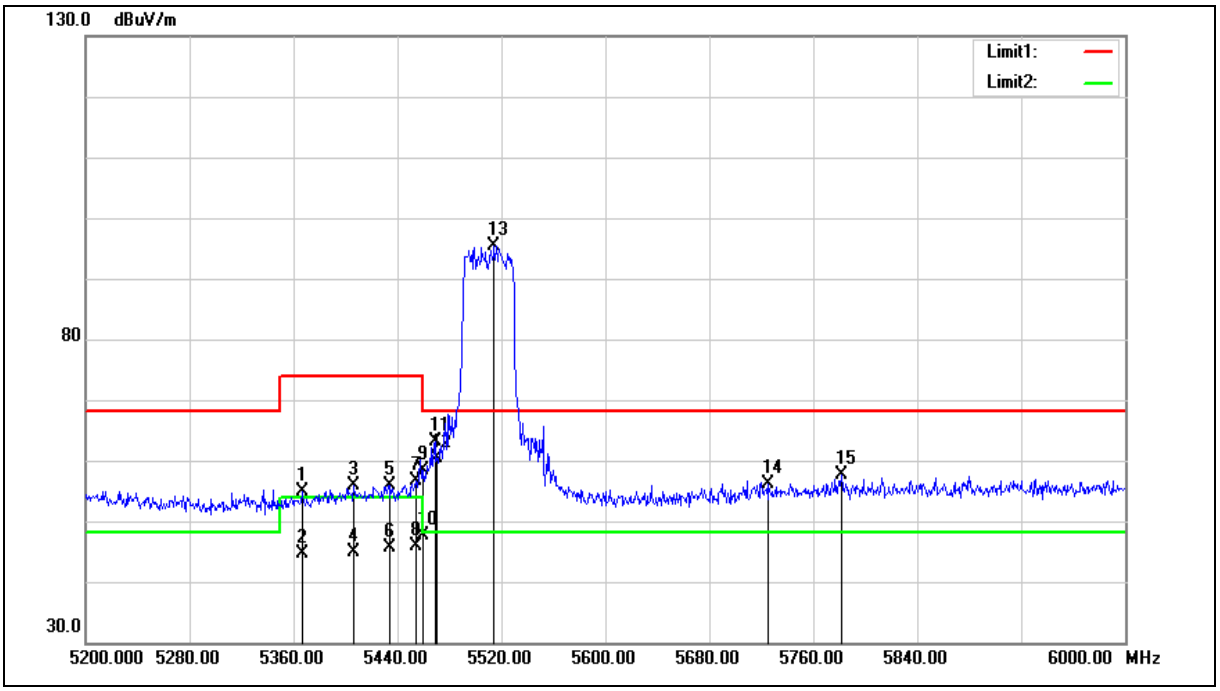

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5510 MHz		
Mode:	Mode 17		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5366.400	49.26	5.65	54.91	74.00	-19.09	peak
2	5366.400	38.98	5.65	44.63	54.00	-9.37	AVG
3	5406.400	50.01	5.75	55.76	74.00	-18.24	peak
4	5406.400	39.20	5.75	44.95	54.00	-9.05	AVG
5	5433.600	50.13	5.81	55.94	74.00	-18.06	peak
6	5433.600	39.77	5.81	45.58	54.00	-8.42	AVG
7	5454.400	50.84	5.86	56.70	74.00	-17.30	peak
8	5454.400	40.06	5.86	45.92	54.00	-8.08	AVG
9	5460.000	52.53	5.88	58.41	74.00	-15.59	peak
10	5460.000	41.73	5.88	47.61	54.00	-6.39	AVG
11	5468.800	57.21	5.90	63.11	68.20	-5.09	peak
12	5470.000	54.48	5.91	60.39	68.20	-7.81	peak
13	5514.400	89.46	6.00	95.46	--	--	peak
14	5725.000	49.77	6.47	56.24	68.20	-11.96	peak
15	5781.600	50.91	6.60	57.51	68.20	-10.69	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5510 MHz		
Mode:	Mode 17		
Ant.Polar.:	Vertical		

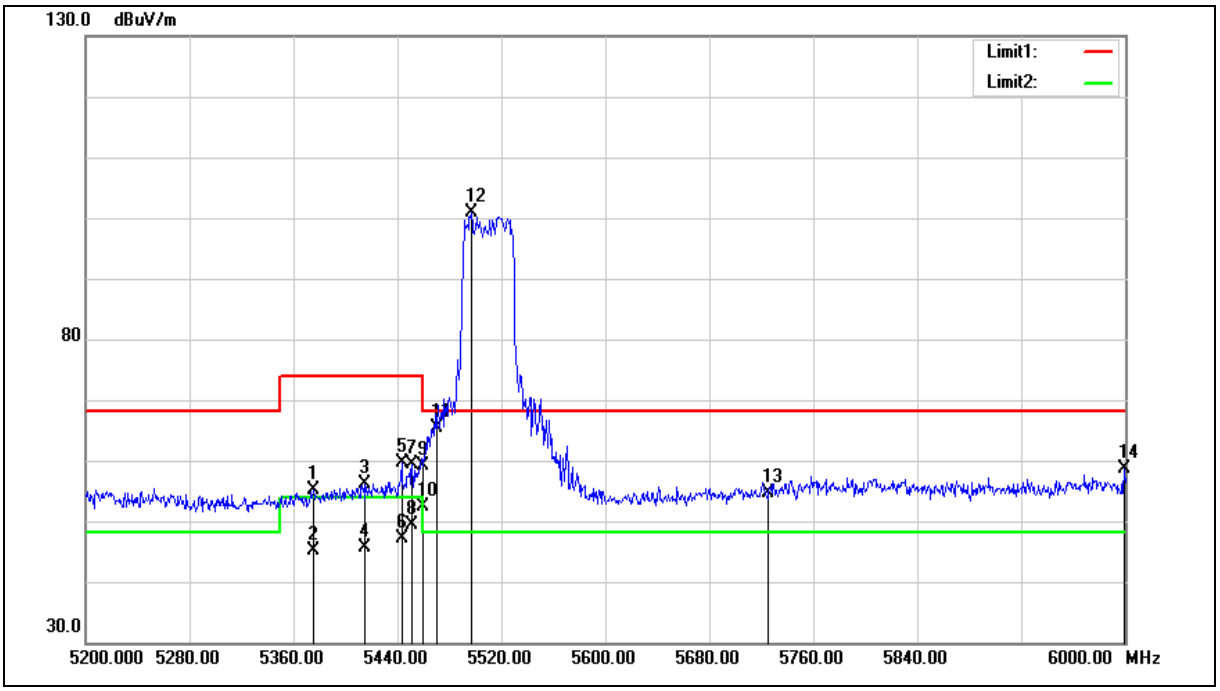

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5510 MHz		
Mode:	Mode 17		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5375.200	49.50	5.67	55.17	74.00	-18.83	peak
2	5375.200	39.35	5.67	45.02	54.00	-8.98	AVG
3	5414.400	50.44	5.77	56.21	74.00	-17.79	peak
4	5414.400	39.75	5.77	45.52	54.00	-8.48	AVG
5	5443.200	53.78	5.83	59.61	74.00	-14.39	peak
6	5443.200	41.37	5.83	47.20	54.00	-6.80	AVG
7	5451.200	53.60	5.85	59.45	74.00	-14.55	peak
8	5451.200	43.61	5.85	49.46	54.00	-4.54	AVG
9	5460.000	53.21	5.88	59.09	74.00	-14.91	peak
10	5460.000	46.50	5.88	52.38	54.00	-1.62	AVG
11	5470.000	59.36	5.91	65.27	68.20	-2.93	peak
12	5496.800	94.88	5.97	100.85	--	--	peak
13	5725.000	48.09	6.47	54.56	68.20	-13.64	peak
14	5999.200	51.58	7.09	58.67	68.20	-9.53	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5550 MHz		
Mode:	Mode 17		
Ant.Polar.:	Horizontal		

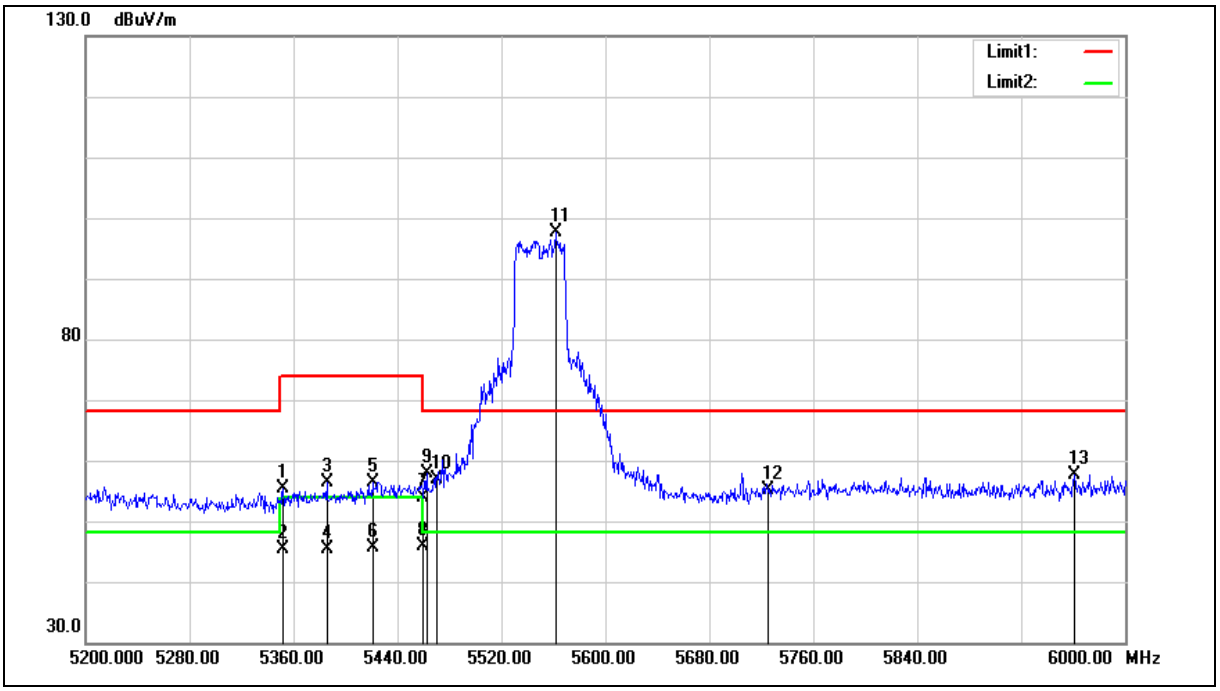

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5550 MHz		
Mode:	Mode 17		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5352.000	49.78	5.61	55.39	74.00	-18.61	peak
2	5352.000	39.70	5.61	45.31	54.00	-8.69	AVG
3	5385.600	50.61	5.69	56.30	74.00	-17.70	peak
4	5385.600	39.81	5.69	45.50	54.00	-8.50	AVG
5	5420.800	50.69	5.79	56.48	74.00	-17.52	peak
6	5420.800	39.83	5.79	45.62	54.00	-8.38	AVG
7	5460.000	47.90	5.88	53.78	74.00	-20.22	peak
8	5460.000	39.96	5.88	45.84	54.00	-8.16	AVG
9	5462.400	52.00	5.88	57.88	68.20	-10.32	peak
10	5470.000	50.88	5.91	56.79	68.20	-11.41	peak
11	5561.600	91.53	6.12	97.65	--	--	peak
12	5725.000	48.77	6.47	55.24	68.20	-12.96	peak
13	5960.800	50.70	7.01	57.71	68.20	-10.49	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5550 MHz		
Mode:	Mode 17		
Ant.Polar.:	Vertical		

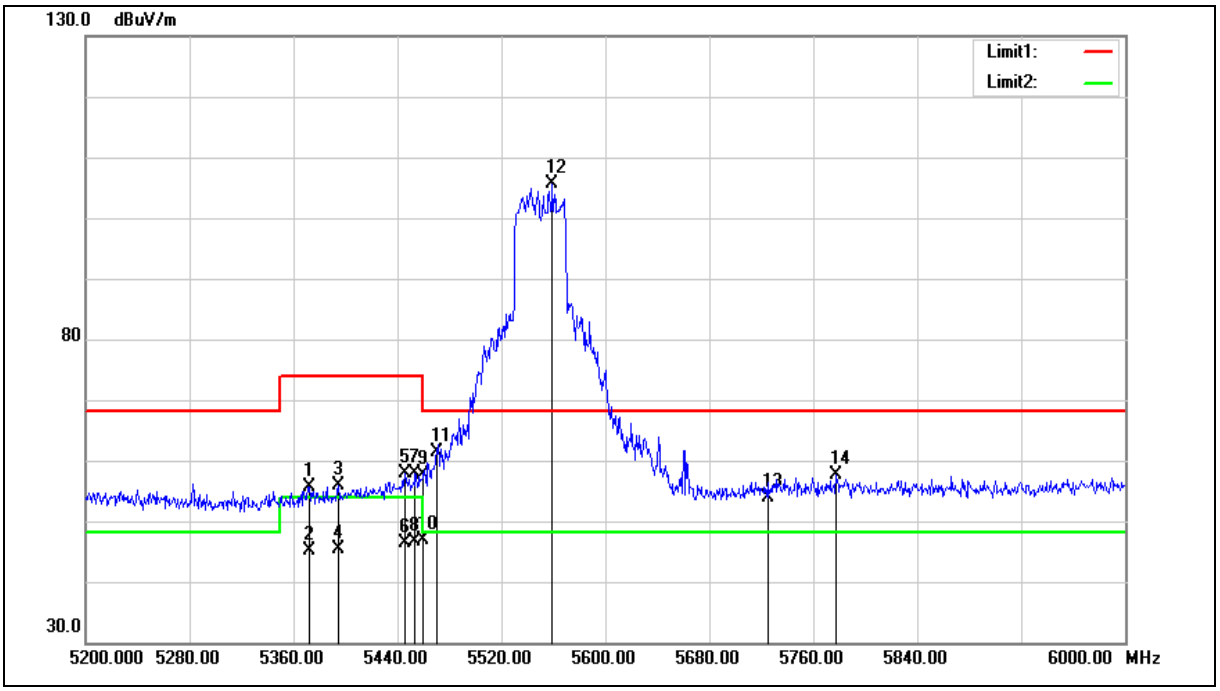

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5550 MHz		
Mode:	Mode 17		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5372.000	50.01	5.66	55.67	74.00	-18.33	peak
2	5372.000	39.42	5.66	45.08	54.00	-8.92	AVG
3	5394.400	50.06	5.72	55.78	74.00	-18.22	peak
4	5394.400	39.74	5.72	45.46	54.00	-8.54	AVG
5	5445.600	51.99	5.84	57.83	74.00	-16.17	peak
6	5445.600	40.43	5.84	46.27	54.00	-7.73	AVG
7	5453.600	51.99	5.86	57.85	74.00	-16.15	peak
8	5453.600	40.66	5.86	46.52	54.00	-7.48	AVG
9	5460.000	51.71	5.88	57.59	74.00	-16.41	peak
10	5460.000	41.05	5.88	46.93	54.00	-7.07	AVG
11	5470.000	55.45	5.91	61.36	68.20	-6.84	peak
12	5559.200	99.40	6.11	105.51	--	--	peak
13	5725.000	47.35	6.47	53.82	68.20	-14.38	peak
14	5777.600	51.04	6.59	57.63	68.20	-10.57	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5670 MHz		
Mode:	Mode 17		
Ant.Polar.:	Horizontal		

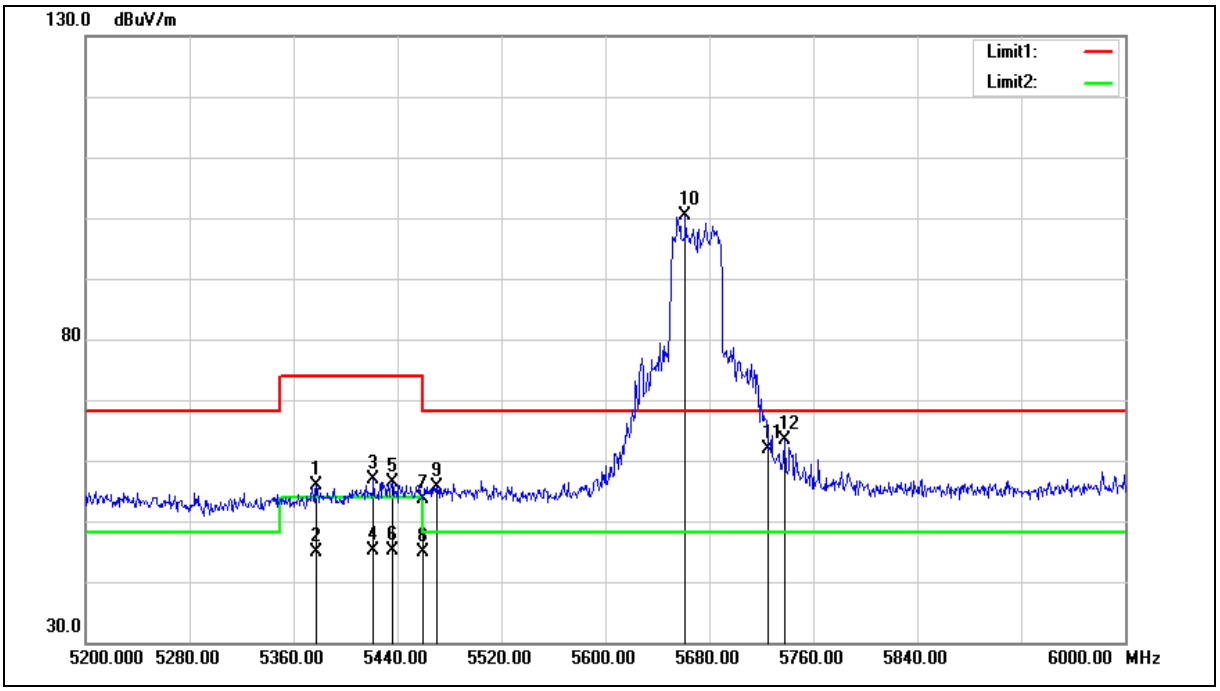

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5670 MHz		
Mode:	Mode 17		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5377.600	50.10	5.67	55.77	74.00	-18.23	peak
2	5377.600	39.15	5.67	44.82	54.00	-9.18	AVG
3	5421.600	51.05	5.79	56.84	74.00	-17.16	peak
4	5421.600	39.35	5.79	45.14	54.00	-8.86	AVG
5	5436.000	50.56	5.81	56.37	74.00	-17.63	peak
6	5436.000	39.24	5.81	45.05	54.00	-8.95	AVG
7	5460.000	47.73	5.88	53.61	74.00	-20.39	peak
8	5460.000	39.11	5.88	44.99	54.00	-9.01	AVG
9	5470.000	49.77	5.91	55.68	68.20	-12.52	peak
10	5661.600	93.99	6.34	100.33	--	--	peak
11	5725.000	55.47	6.47	61.94	68.20	-6.26	peak
12	5737.600	56.96	6.50	63.46	68.20	-4.74	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5670 MHz		
Mode:	Mode 17		
Ant.Polar.:	Vertical		

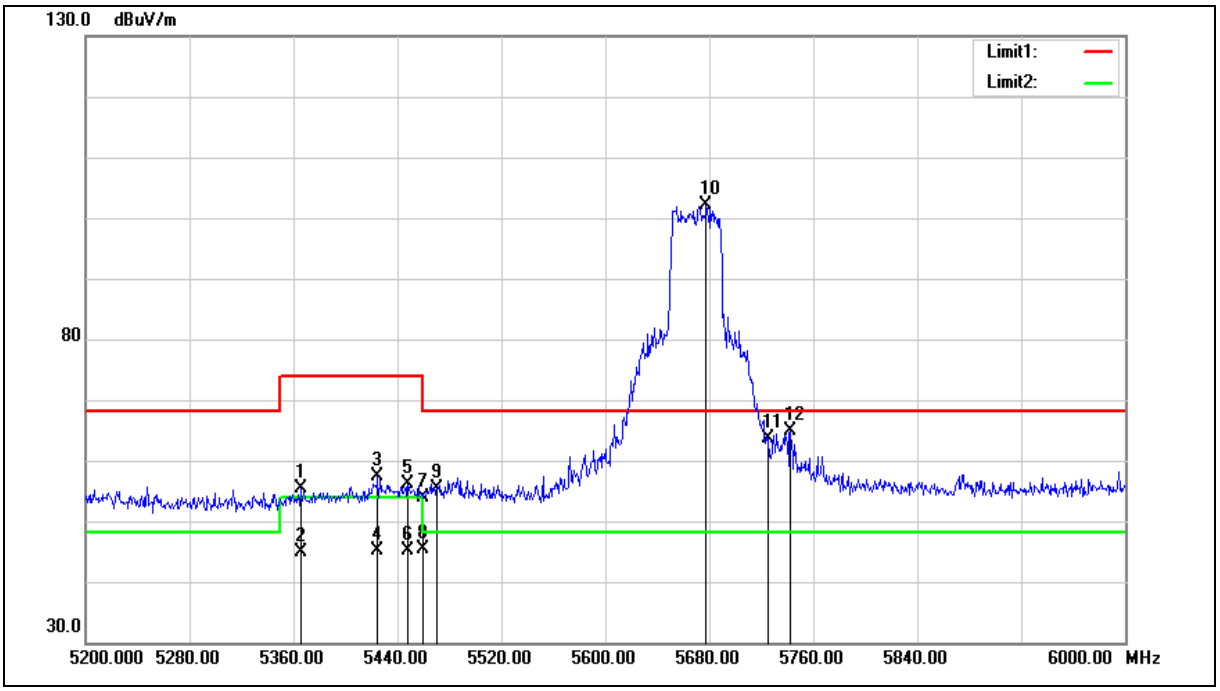

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5670 MHz		
Mode:	Mode 17		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5365.600	49.64	5.65	55.29	74.00	-18.71	peak
2	5365.600	39.25	5.65	44.90	54.00	-9.10	AVG
3	5424.800	51.56	5.79	57.35	74.00	-16.65	peak
4	5424.800	39.33	5.79	45.12	54.00	-8.88	AVG
5	5448.000	50.19	5.85	56.04	74.00	-17.96	peak
6	5448.000	39.20	5.85	45.05	54.00	-8.95	AVG
7	5460.000	48.03	5.88	53.91	74.00	-20.09	peak
8	5460.000	39.45	5.88	45.33	54.00	-8.67	AVG
9	5470.000	49.42	5.91	55.33	68.20	-12.87	peak
10	5677.600	95.85	6.37	102.22	--	--	peak
11	5725.000	57.17	6.47	63.64	68.20	-4.56	peak
12	5742.400	58.30	6.52	64.82	68.20	-3.38	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5755 MHz		
Mode:	Mode 17		
Ant.Polar.:	Horizontal		

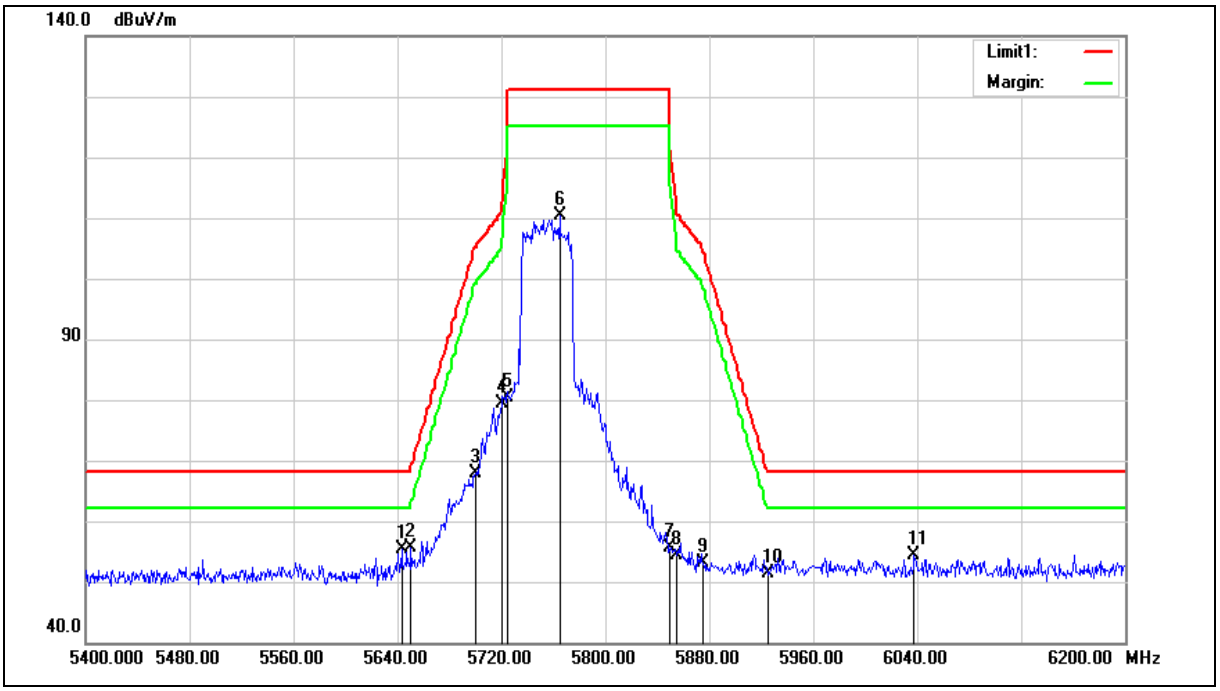

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5755 MHz		
Mode:	Mode 17		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5643.200	54.76	0.60	55.36	68.20	-12.84	peak
2	5650.000	55.10	0.62	55.72	68.20	-12.48	peak
3	5700.000	67.14	0.75	67.89	105.20	-37.31	peak
4	5720.000	78.46	0.81	79.27	110.80	-31.53	peak
5	5725.000	79.65	0.82	80.47	122.20	-41.73	peak
6	5764.800	109.48	0.93	110.41	--	--	peak
7	5850.000	54.34	1.17	55.51	122.20	-66.69	peak
8	5855.000	53.15	1.18	54.33	110.80	-56.47	peak
9	5875.000	52.00	1.23	53.23	105.20	-51.97	peak
10	5925.000	50.11	1.37	51.48	68.20	-16.72	peak
11	6037.600	52.61	1.70	54.31	68.20	-13.89	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5755 MHz		
Mode:	Mode 17		
Ant.Polar.:	Vertical		

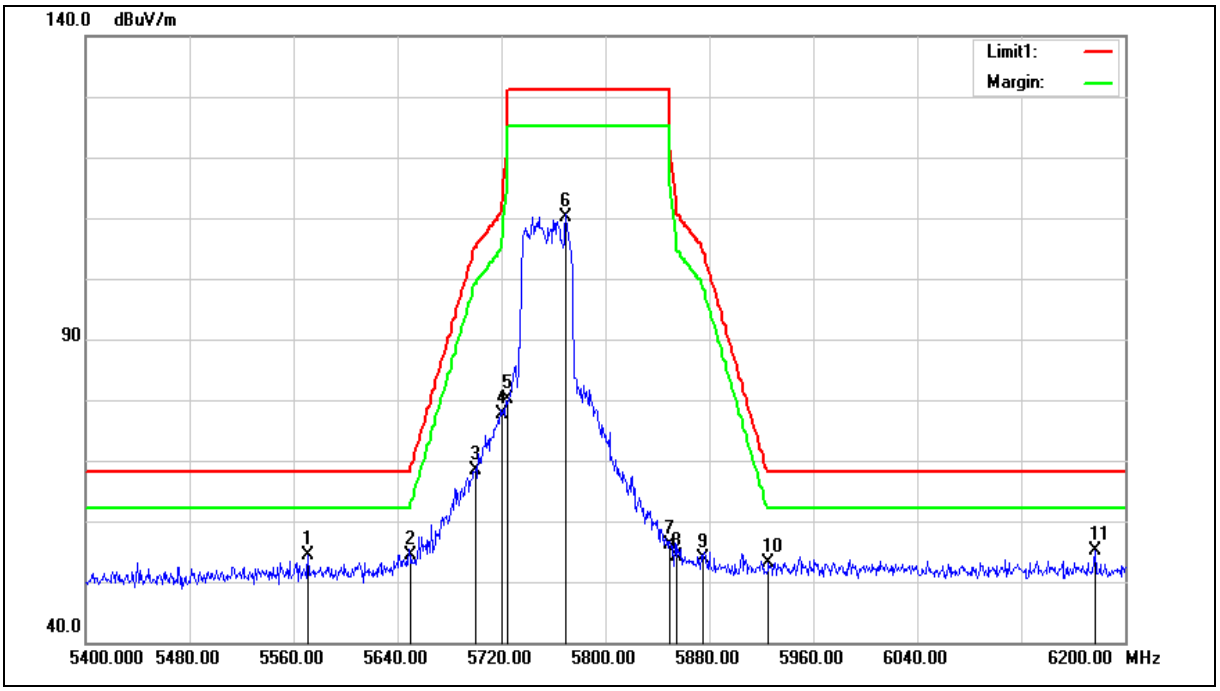

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5755 MHz		
Mode:	Mode 17		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5571.200	54.09	0.40	54.49	68.20	-13.71	peak
2	5650.000	53.68	0.62	54.30	68.20	-13.90	peak
3	5700.000	67.68	0.75	68.43	105.20	-36.77	peak
4	5720.000	76.86	0.81	77.67	110.80	-33.13	peak
5	5725.000	79.23	0.82	80.05	122.20	-42.15	peak
6	5769.600	109.24	0.94	110.18	--	--	peak
7	5850.000	54.85	1.17	56.02	122.20	-66.18	peak
8	5855.000	53.05	1.18	54.23	110.80	-56.57	peak
9	5875.000	52.77	1.23	54.00	105.20	-51.20	peak
10	5925.000	51.73	1.37	53.10	68.20	-15.10	peak
11	6176.800	52.87	2.19	55.06	68.20	-13.14	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5795 MHz		
Mode:	Mode 17		
Ant.Polar.:	Horizontal		

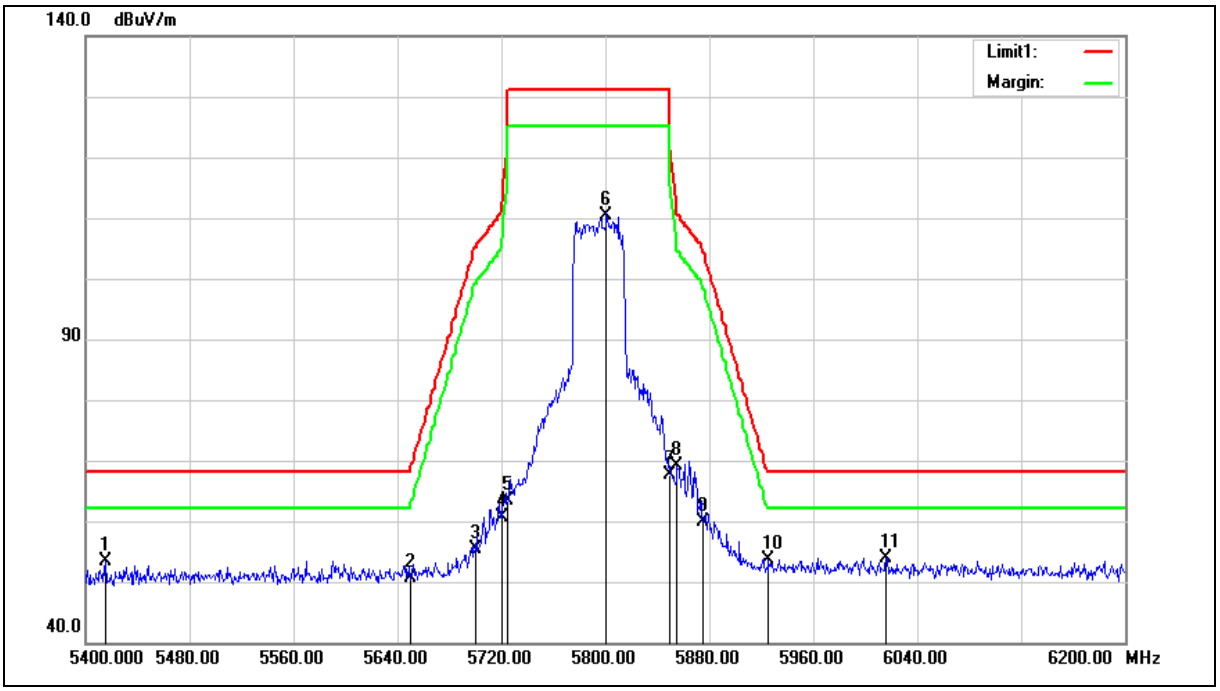

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5795 MHz		
Mode:	Mode 17		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5415.200	53.43	0.05	53.48	68.20	-14.72	peak
2	5650.000	50.03	0.62	50.65	68.20	-17.55	peak
3	5700.000	54.66	0.75	55.41	105.20	-49.79	peak
4	5720.000	59.82	0.81	60.63	110.80	-50.17	peak
5	5725.000	62.62	0.82	63.44	122.20	-58.76	peak
6	5800.800	109.45	1.03	110.48	--	--	peak
7	5850.000	66.35	1.17	67.52	122.20	-54.68	peak
8	5855.000	68.05	1.18	69.23	110.80	-41.57	peak
9	5875.000	58.73	1.23	59.96	105.20	-45.24	peak
10	5925.000	52.27	1.37	53.64	68.20	-14.56	peak
11	6016.000	52.24	1.63	53.87	68.20	-14.33	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5795 MHz		
Mode:	Mode 17		
Ant.Polar.:	Vertical		

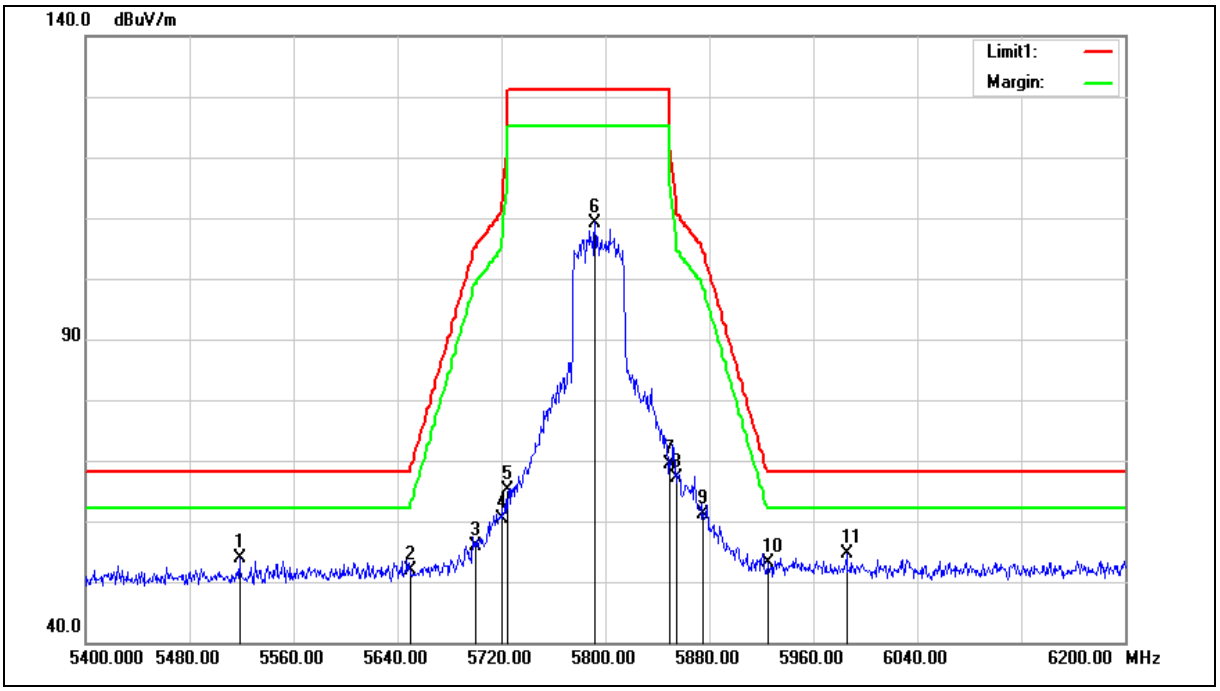

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5795 MHz		
Mode:	Mode 17		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5518.400	53.53	0.27	53.80	68.20	-14.40	peak
2	5650.000	51.20	0.62	51.82	68.20	-16.38	peak
3	5700.000	55.19	0.75	55.94	105.20	-49.26	peak
4	5720.000	59.57	0.81	60.38	110.80	-50.42	peak
5	5725.000	64.23	0.82	65.05	122.20	-57.15	peak
6	5792.000	108.24	1.01	109.25	--	--	peak
7	5850.000	68.18	1.17	69.35	122.20	-52.85	peak
8	5855.000	65.83	1.18	67.01	110.80	-43.79	peak
9	5875.000	59.97	1.23	61.20	105.20	-44.00	peak
10	5925.000	51.69	1.37	53.06	68.20	-15.14	peak
11	5985.600	53.18	1.53	54.71	68.20	-13.49	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5210 MHz		
Mode:	Mode 18		
Ant.Polar.:	Horizontal		

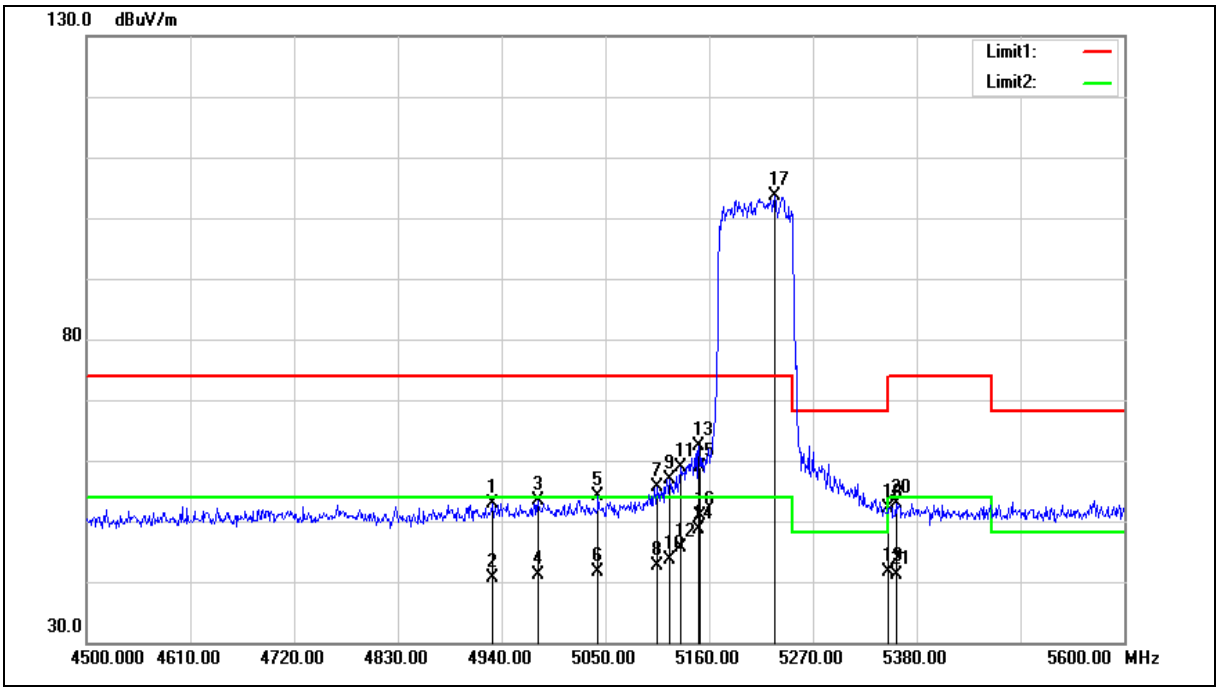

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5210 MHz		
Mode:	Mode 18		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4930.100	53.88	-0.96	52.92	74.00	-21.08	peak
2	4930.100	41.64	-0.96	40.68	54.00	-13.32	AVG
3	4978.500	54.18	-0.83	53.35	74.00	-20.65	peak
4	4978.500	41.87	-0.83	41.04	54.00	-12.96	AVG
5	5042.300	54.78	-0.69	54.09	74.00	-19.91	peak
6	5042.300	42.26	-0.69	41.57	54.00	-12.43	AVG
7	5105.000	56.10	-0.57	55.53	74.00	-18.47	peak
8	5105.000	43.19	-0.57	42.62	54.00	-11.38	AVG
9	5118.200	57.41	-0.54	56.87	74.00	-17.13	peak
10	5118.200	44.06	-0.54	43.52	54.00	-10.48	AVG
11	5130.300	59.30	-0.52	58.78	74.00	-15.22	peak
12	5130.300	46.14	-0.52	45.62	54.00	-8.38	AVG
13	5149.000	62.91	-0.48	62.43	74.00	-11.57	peak
14	5149.000	49.23	-0.48	48.75	54.00	-5.25	AVG
15	5150.000	59.48	-0.48	59.00	74.00	-15.00	peak
16	5150.000	51.42	-0.48	50.94	54.00	-3.06	AVG
17	5229.300	103.93	-0.32	103.61	--	--	peak
18	5350.000	52.24	-0.08	52.16	74.00	-21.84	peak
19	5350.000	41.73	-0.08	41.65	54.00	-12.35	AVG
20	5358.000	53.02	-0.06	52.96	74.00	-21.04	peak
21	5358.000	41.08	-0.06	41.02	54.00	-12.98	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5210 MHz		
Mode:	Mode 18		
Ant.Polar.:	Vertical		

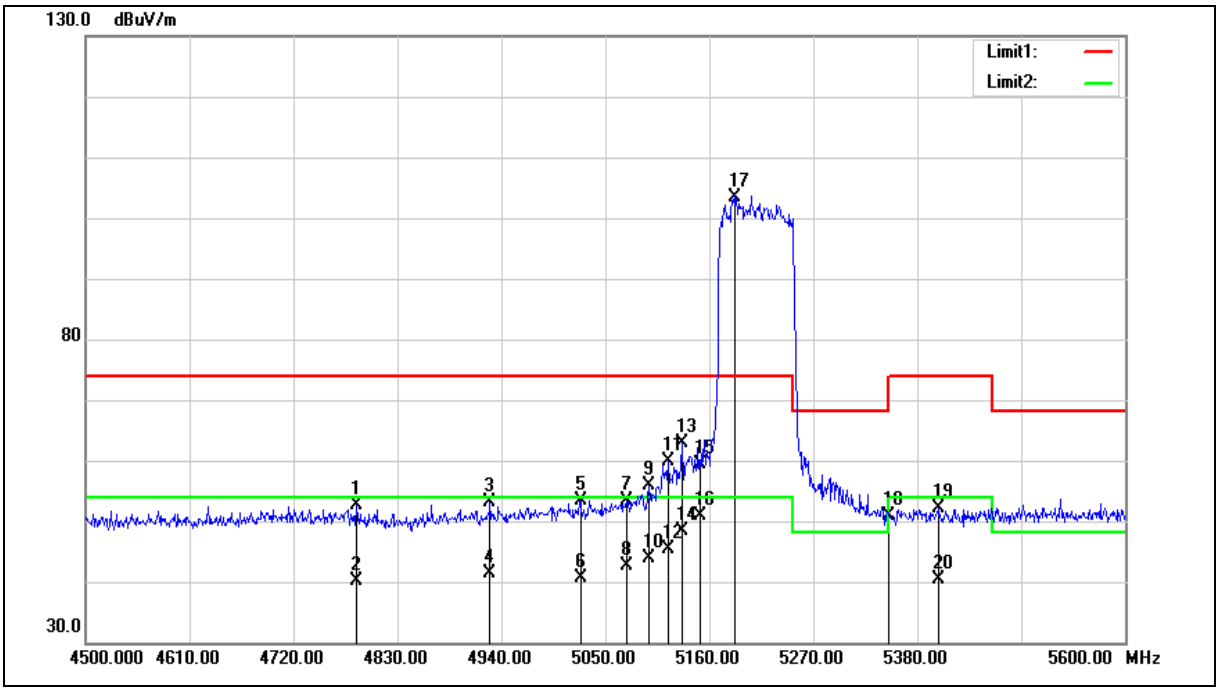

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5210 MHz		
Mode:	Mode 18		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4786.000	53.89	-1.36	52.53	74.00	-21.47	peak
2	4786.000	41.50	-1.36	40.14	54.00	-13.86	AVG
3	4927.900	53.99	-0.96	53.03	74.00	-20.97	peak
4	4927.900	42.39	-0.96	41.43	54.00	-12.57	AVG
5	5023.600	54.21	-0.72	53.49	74.00	-20.51	peak
6	5023.600	41.40	-0.72	40.68	54.00	-13.32	AVG
7	5072.000	54.12	-0.63	53.49	74.00	-20.51	peak
8	5072.000	43.38	-0.63	42.75	54.00	-11.25	AVG
9	5096.200	56.57	-0.57	56.00	74.00	-18.00	peak
10	5096.200	44.49	-0.57	43.92	54.00	-10.08	AVG
11	5117.100	60.53	-0.54	59.99	74.00	-14.01	peak
12	5117.100	45.98	-0.54	45.44	54.00	-8.56	AVG
13	5131.400	63.42	-0.51	62.91	74.00	-11.09	peak
14	5131.400	48.96	-0.51	48.45	54.00	-5.55	AVG
15	5150.000	59.89	-0.48	59.41	74.00	-14.59	peak
16	5150.000	51.35	-0.48	50.87	54.00	-3.13	AVG
17	5187.500	103.85	-0.40	103.45	--	--	peak
18	5350.000	51.01	-0.08	50.93	74.00	-23.07	peak
19	5403.100	52.00	0.02	52.02	74.00	-21.98	peak
20	5403.100	40.47	0.02	40.49	54.00	-13.51	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5290 MHz		
Mode:	Mode 18		
Ant.Polar.:	Horizontal		

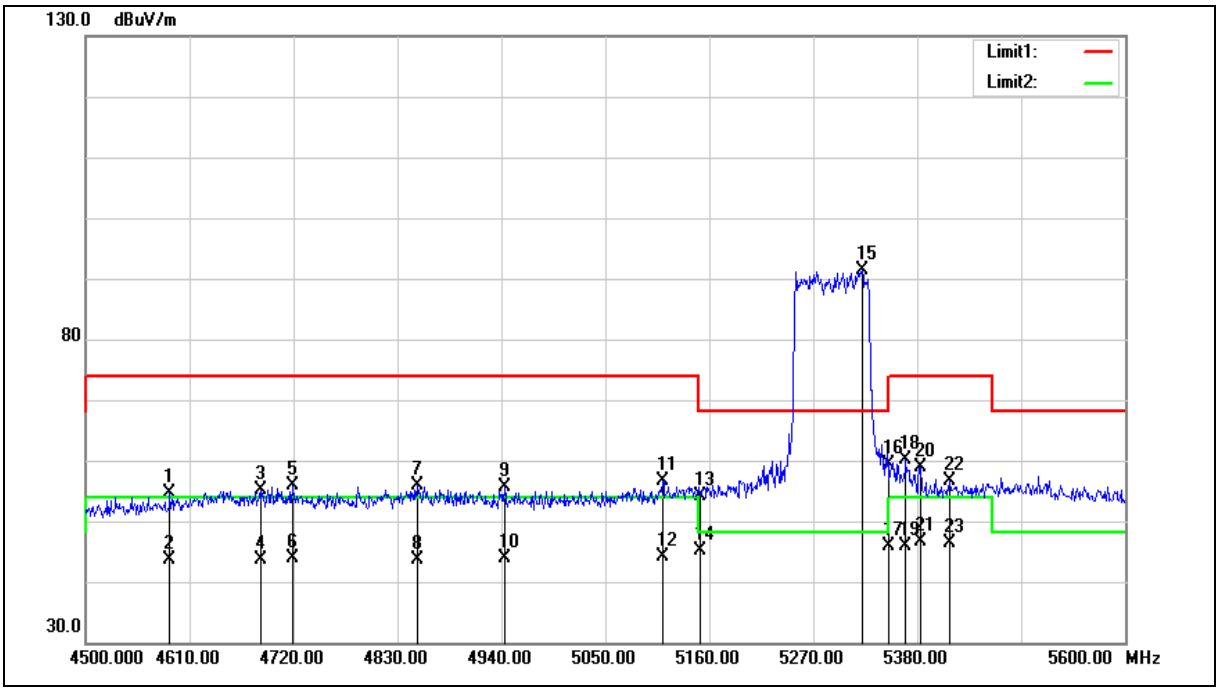

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5290 MHz		
Mode:	Mode 18		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4589.100	50.99	3.70	54.69	74.00	-19.31	peak
2	4589.100	39.84	3.70	43.54	54.00	-10.46	AVG
3	4684.800	51.18	3.95	55.13	74.00	-18.87	peak
4	4684.800	39.75	3.95	43.70	54.00	-10.30	AVG
5	4718.900	51.87	4.03	55.90	74.00	-18.10	peak
6	4718.900	39.88	4.03	43.91	54.00	-10.09	AVG
7	4850.900	51.55	4.37	55.92	74.00	-18.08	peak
8	4850.900	39.28	4.37	43.65	54.00	-10.35	AVG
9	4943.300	51.05	4.61	55.66	74.00	-18.34	peak
10	4943.300	39.37	4.61	43.98	54.00	-10.02	AVG
11	5110.500	51.67	5.02	56.69	74.00	-17.31	peak
12	5110.500	39.08	5.02	44.10	54.00	-9.90	AVG
13	5150.000	49.06	5.12	54.18	74.00	-19.82	peak
14	5150.000	40.07	5.12	45.19	54.00	-8.81	AVG
15	5321.700	85.92	5.54	91.46	--	--	peak
16	5350.000	53.87	5.61	59.48	74.00	-14.52	peak
17	5350.000	40.36	5.61	45.97	54.00	-8.03	AVG
18	5367.900	54.54	5.64	60.18	74.00	-13.82	peak
19	5367.900	40.35	5.64	45.99	54.00	-8.01	AVG
20	5383.300	53.27	5.69	58.96	74.00	-15.04	peak
21	5383.300	40.90	5.69	46.59	54.00	-7.41	AVG
22	5414.100	50.82	5.77	56.59	74.00	-17.41	peak
23	5414.100	40.55	5.77	46.32	54.00	-7.68	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5290 MHz		
Mode:	Mode 18		
Ant.Polar.:	Vertical		

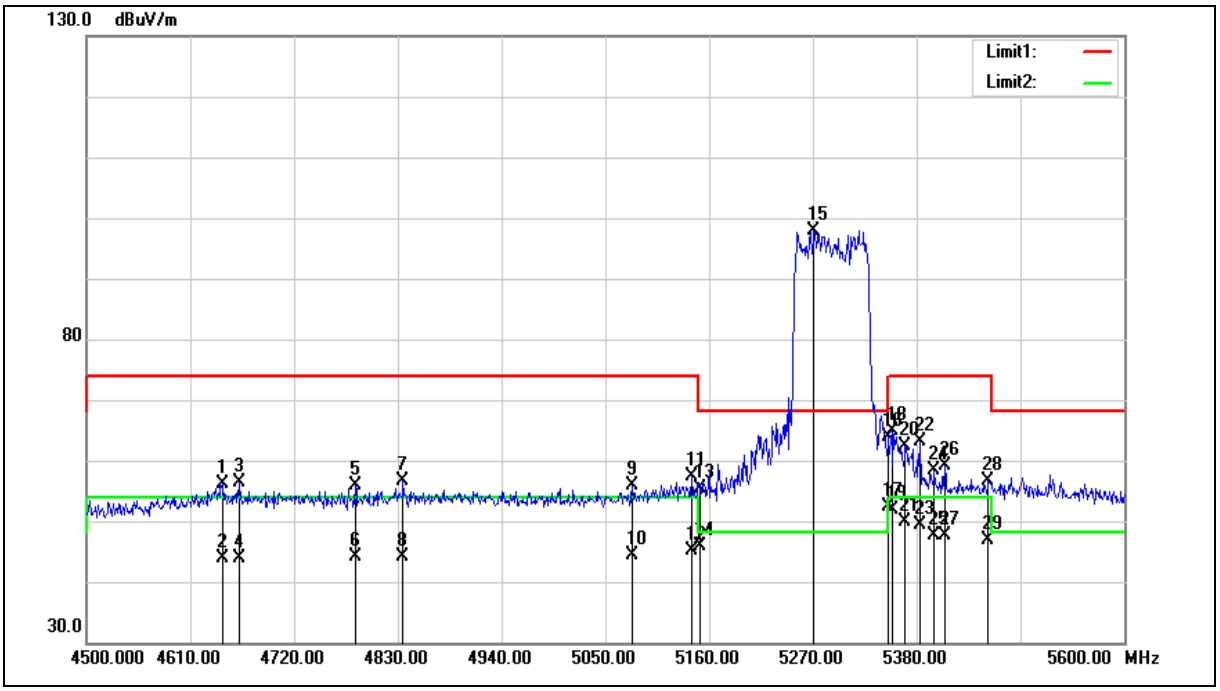

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5290 MHz		
Mode:	Mode 18		
Ant.Polar.:	Vertical		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4644.100	52.28	3.84	56.12	74.00	-17.88	peak
2	4644.100	39.97	3.84	43.81	54.00	-10.19	AVG
3	4661.700	52.39	3.89	56.28	74.00	-17.72	peak
4	4661.700	40.05	3.89	43.94	54.00	-10.06	AVG
5	4784.900	51.64	4.21	55.85	74.00	-18.15	peak
6	4784.900	39.89	4.21	44.10	54.00	-9.90	AVG
7	4835.500	52.32	4.33	56.65	74.00	-17.35	peak
8	4835.500	39.71	4.33	44.04	54.00	-9.96	AVG
9	5078.600	51.04	4.94	55.98	74.00	-18.02	peak
10	5078.600	39.45	4.94	44.39	54.00	-9.61	AVG
11	5141.300	52.36	5.09	57.45	74.00	-16.55	peak
12	5141.300	40.12	5.09	45.21	54.00	-8.79	AVG
13	5150.000	50.16	5.12	55.28	74.00	-18.72	peak
14	5150.000	40.74	5.12	45.86	54.00	-8.14	AVG
15	5271.100	92.47	5.42	97.89	--	--	peak
16	5350.000	58.39	5.61	64.00	74.00	-10.00	peak
17	5350.000	46.72	5.61	52.33	54.00	-1.67	AVG
18	5353.600	59.34	5.62	64.96	74.00	-9.04	peak
19	5353.600	46.19	5.62	51.81	54.00	-2.19	AVG
20	5367.900	56.64	5.64	62.28	74.00	-11.72	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5290 MHz		
Mode:	Mode 18		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
21	5367.900	44.24	5.64	49.88	54.00	-4.12	AVG
22	5383.300	57.51	5.69	63.20	74.00	-10.80	peak
23	5383.300	43.71	5.69	49.40	54.00	-4.60	AVG
24	5398.700	52.67	5.73	58.40	74.00	-15.60	peak
25	5398.700	41.92	5.73	47.65	54.00	-6.35	AVG
26	5409.700	53.46	5.76	59.22	74.00	-14.78	peak
27	5409.700	41.75	5.76	47.51	54.00	-6.49	AVG
28	5455.900	50.66	5.86	56.52	74.00	-17.48	peak
29	5455.900	40.95	5.86	46.81	54.00	-7.19	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5530 MHz		
Mode:	Mode 18		
Ant.Polar.:	Horizontal		

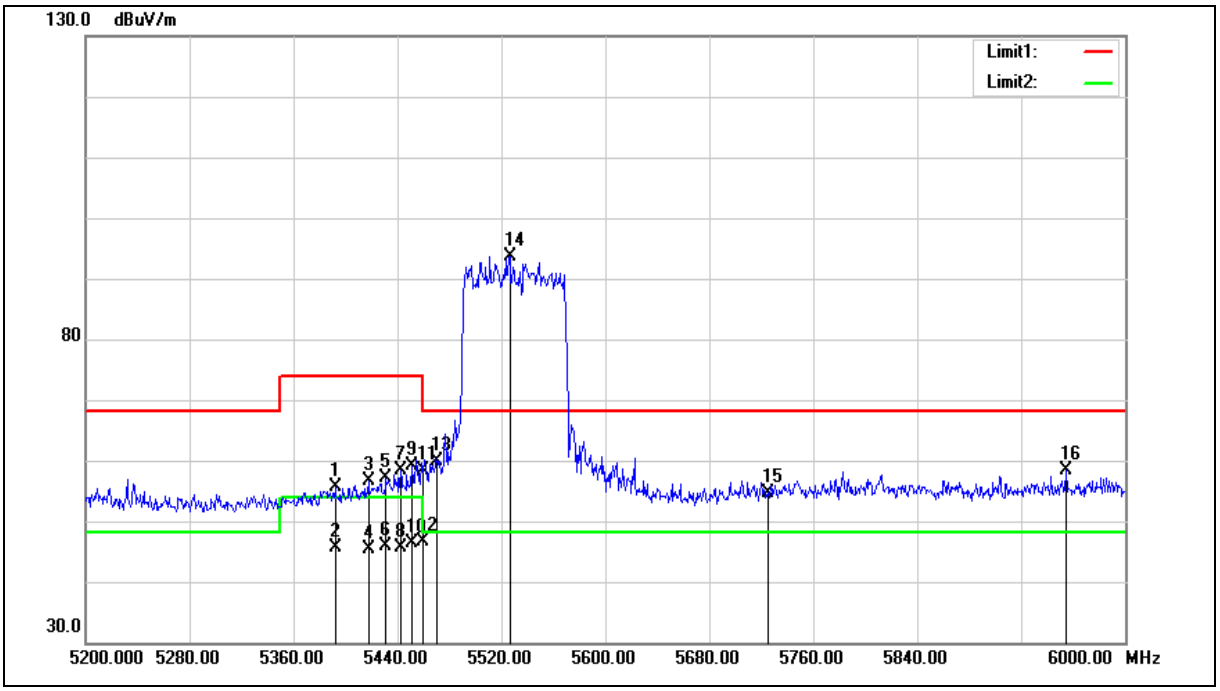

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5530 MHz		
Mode:	Mode 18		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5392.000	49.82	5.71	55.53	74.00	-18.47	peak
2	5392.000	39.80	5.71	45.51	54.00	-8.49	AVG
3	5417.600	50.79	5.77	56.56	74.00	-17.44	peak
4	5417.600	39.71	5.77	45.48	54.00	-8.52	AVG
5	5431.200	51.25	5.81	57.06	74.00	-16.94	peak
6	5431.200	40.09	5.81	45.90	54.00	-8.10	AVG
7	5442.400	52.46	5.83	58.29	74.00	-15.71	peak
8	5442.400	39.91	5.83	45.74	54.00	-8.26	AVG
9	5451.200	53.28	5.85	59.13	74.00	-14.87	peak
10	5451.200	40.49	5.85	46.34	54.00	-7.66	AVG
11	5460.000	52.49	5.88	58.37	74.00	-15.63	peak
12	5460.000	40.87	5.88	46.75	54.00	-7.25	AVG
13	5470.000	53.97	5.91	59.88	68.20	-8.32	peak
14	5526.400	87.65	6.04	93.69	--	--	peak
15	5725.000	48.07	6.47	54.54	68.20	-13.66	peak
16	5954.400	51.37	7.00	58.37	68.20	-9.83	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5530 MHz		
Mode:	Mode 18		
Ant.Polar.:	Vertical		

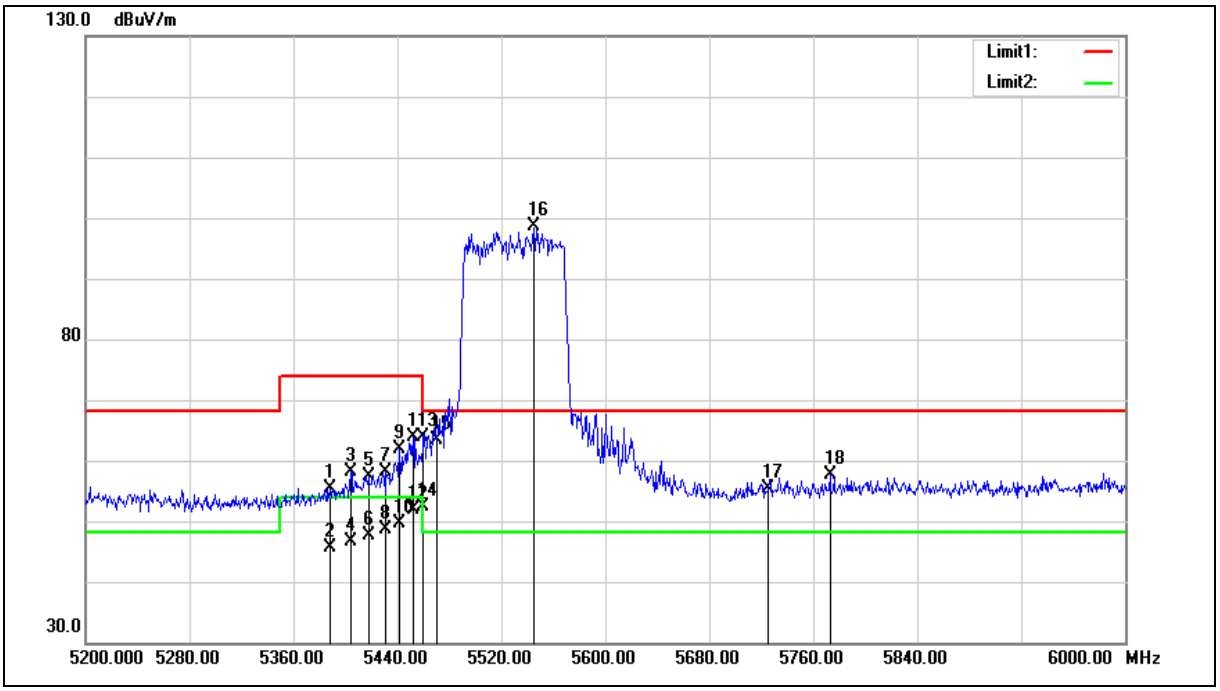

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5530 MHz		
Mode:	Mode 18		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5388.000	49.63	5.70	55.33	74.00	-18.67	peak
2	5388.000	39.86	5.70	45.56	54.00	-8.44	AVG
3	5404.000	52.45	5.74	58.19	74.00	-15.81	peak
4	5404.000	40.95	5.74	46.69	54.00	-7.31	AVG
5	5417.600	51.66	5.77	57.43	74.00	-16.57	peak
6	5417.600	41.93	5.77	47.70	54.00	-6.30	AVG
7	5431.200	52.23	5.81	58.04	74.00	-15.96	peak
8	5431.200	42.84	5.81	48.65	54.00	-5.35	AVG
9	5441.600	56.14	5.82	61.96	74.00	-12.04	peak
10	5441.600	43.70	5.82	49.52	54.00	-4.48	AVG
11	5452.000	57.96	5.85	63.81	74.00	-10.19	peak
12	5452.000	46.10	5.85	51.95	54.00	-2.05	AVG
13	5460.000	57.99	5.88	63.87	74.00	-10.13	peak
14	5460.000	46.50	5.88	52.38	54.00	-1.62	AVG
15	5470.000	57.38	5.91	63.29	68.20	-4.91	peak
16	5544.800	92.62	6.07	98.69	--	--	peak
17	5725.000	48.83	6.47	55.30	68.20	-12.90	peak
18	5772.800	50.96	6.58	57.54	68.20	-10.66	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5775 MHz		
Mode:	Mode 18		
Ant.Polar.:	Horizontal		

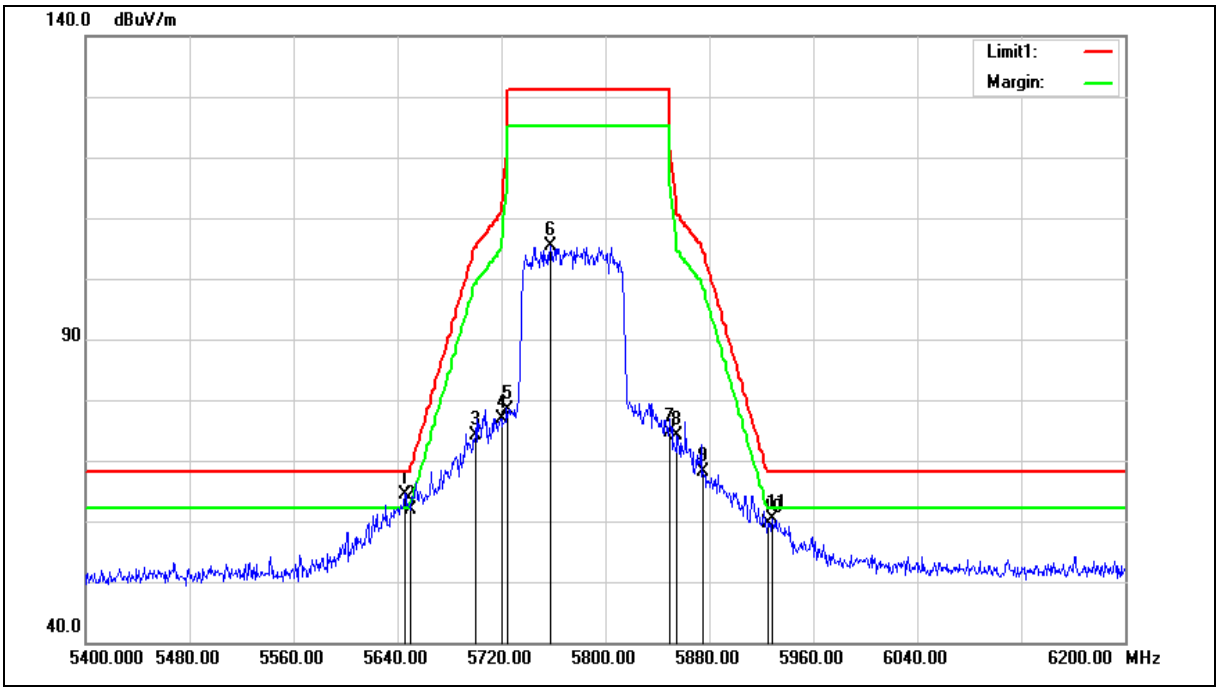

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5775 MHz		
Mode:	Mode 18		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5645.600	63.89	0.61	64.50	68.20	-3.70	peak
2	5650.000	61.16	0.62	61.78	68.20	-6.42	peak
3	5700.000	73.45	0.75	74.20	105.20	-31.00	peak
4	5720.000	76.11	0.81	76.92	110.80	-33.88	peak
5	5725.000	77.60	0.82	78.42	122.20	-43.78	peak
6	5757.600	104.51	0.91	105.42	--	--	peak
7	5850.000	73.56	1.17	74.73	122.20	-47.47	peak
8	5855.000	72.85	1.18	74.03	110.80	-36.77	peak
9	5875.000	66.84	1.23	68.07	105.20	-37.13	peak
10	5925.000	58.21	1.37	59.58	68.20	-8.62	peak
11	5928.000	59.01	1.37	60.38	68.20	-7.82	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5775 MHz		
Mode:	Mode 18		
Ant.Polar.:	Vertical		

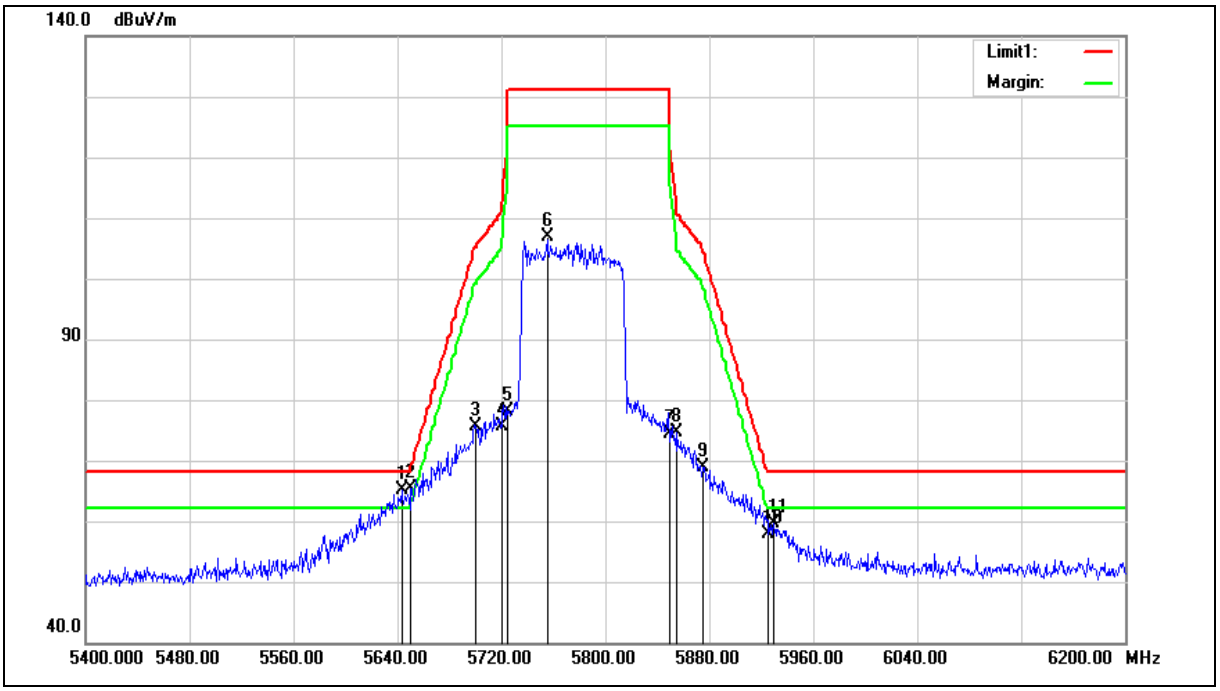

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5775 MHz		
Mode:	Mode 18		
Ant.Polar.:	Vertical		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5643.200	64.54	0.60	65.14	68.20	-3.06	peak
2	5650.000	64.64	0.62	65.26	68.20	-2.94	peak
3	5700.000	74.80	0.75	75.55	105.20	-29.65	peak
4	5720.000	74.91	0.81	75.72	110.80	-35.08	peak
5	5725.000	77.43	0.82	78.25	122.20	-43.95	peak
6	5755.200	106.04	0.91	106.95	--	--	peak
7	5850.000	73.18	1.17	74.35	122.20	-47.85	peak
8	5855.000	73.43	1.18	74.61	110.80	-36.19	peak
9	5875.000	67.66	1.23	68.89	105.20	-36.31	peak
10	5925.000	56.45	1.37	57.82	68.20	-10.38	peak
11	5929.600	58.32	1.38	59.70	68.20	-8.50	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).


2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Beamforming on

其它不必要之訊號 (1 GHz 以下)

Standard:	LP0002	Test Distance:	3 m
Test item:	Radiated Emission		
Frequency:	5745 MHz		
Mode:	Mode 13		
Ant.Polar.:	Horizontal		

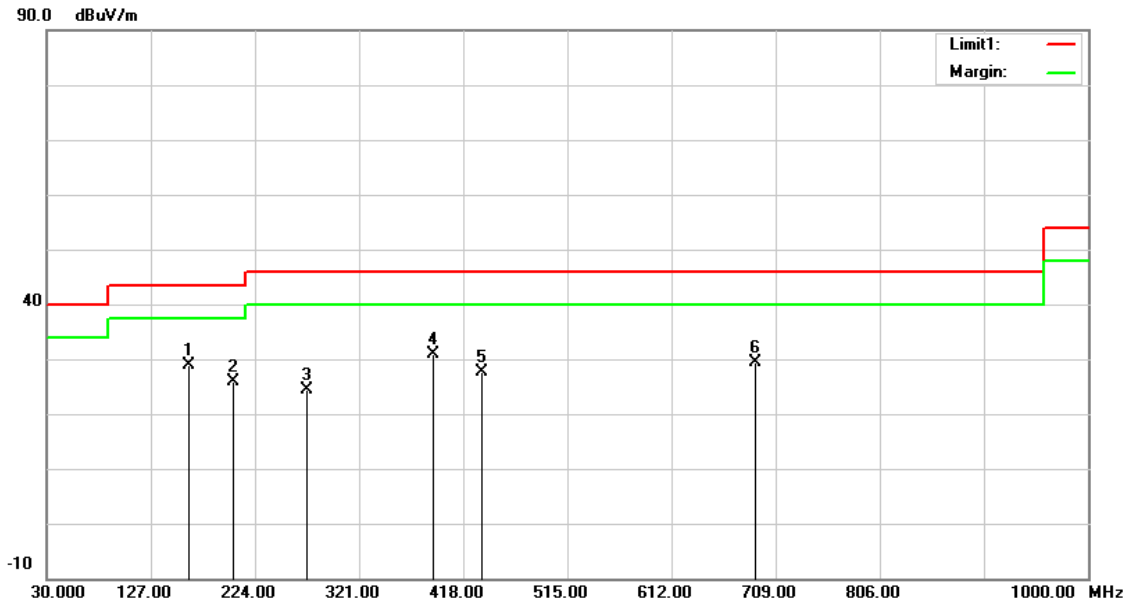

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	162.8900	35.28	-6.52	28.76	43.50	-14.74	QP
2	203.6300	34.91	-9.15	25.76	43.50	-17.74	QP
3	272.5000	30.51	-6.24	24.27	46.00	-21.73	QP
4	389.8700	34.40	-3.57	30.83	46.00	-15.17	QP
5	435.4600	30.41	-2.77	27.64	46.00	-18.36	QP
6	689.6000	27.49	2.00	29.49	46.00	-16.51	QP


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

Example: 28.76 = -6.52 + 35.28

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Radiated Emission		
Frequency:	5745 MHz		
Mode:	Mode 13		
Ant.Polar.:	Vertical		

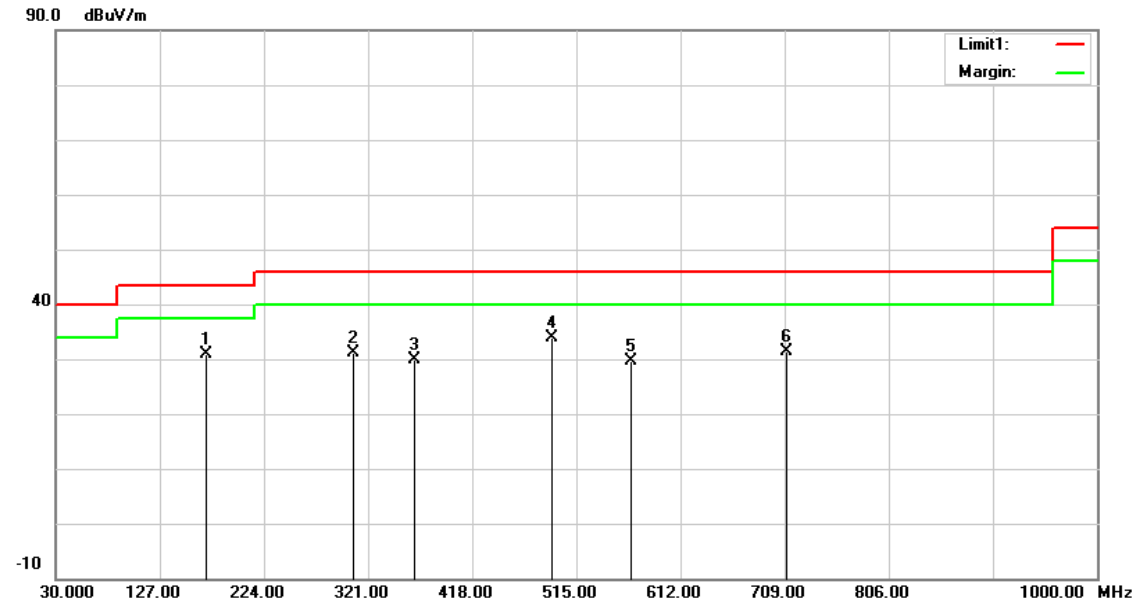

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	169.6800	37.66	-6.75	30.91	43.50	-12.59	QP
2	307.4200	36.50	-5.33	31.17	46.00	-14.83	QP
3	364.6500	34.19	-4.26	29.93	46.00	-16.07	QP
4	492.6900	35.97	-1.98	33.99	46.00	-12.01	QP
5	565.4400	30.01	-0.44	29.57	46.00	-16.43	QP
6	710.9400	28.89	2.37	31.26	46.00	-14.74	QP

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).


Example: 30.91 = -6.75 + 37.66

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

場強輻射量側 (1 GHz 以上)

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5180 MHz		
Mode:	Mode 13		
Ant.Polar.:	Horizontal		

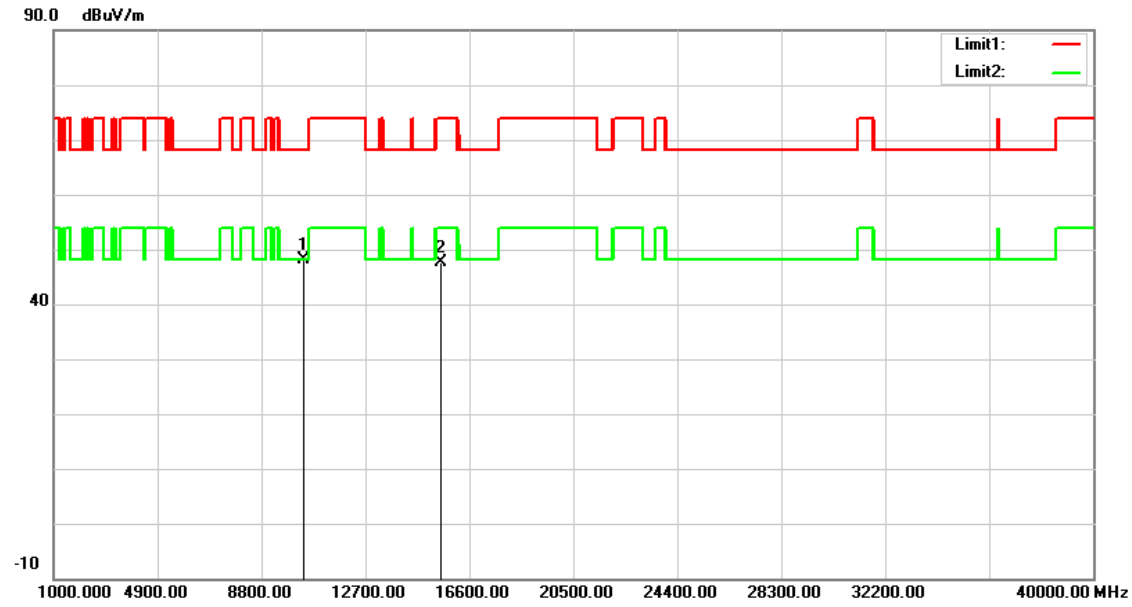

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10360.000	36.56	11.69	48.25	68.20	-19.95	peak
2	15540.000	33.14	14.52	47.66	74.00	-26.34	peak


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

Example: 48.25 = 11.69 + 36.56

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5180 MHz		
Mode:	Mode 13		
Ant.Polar.:	Vertical		

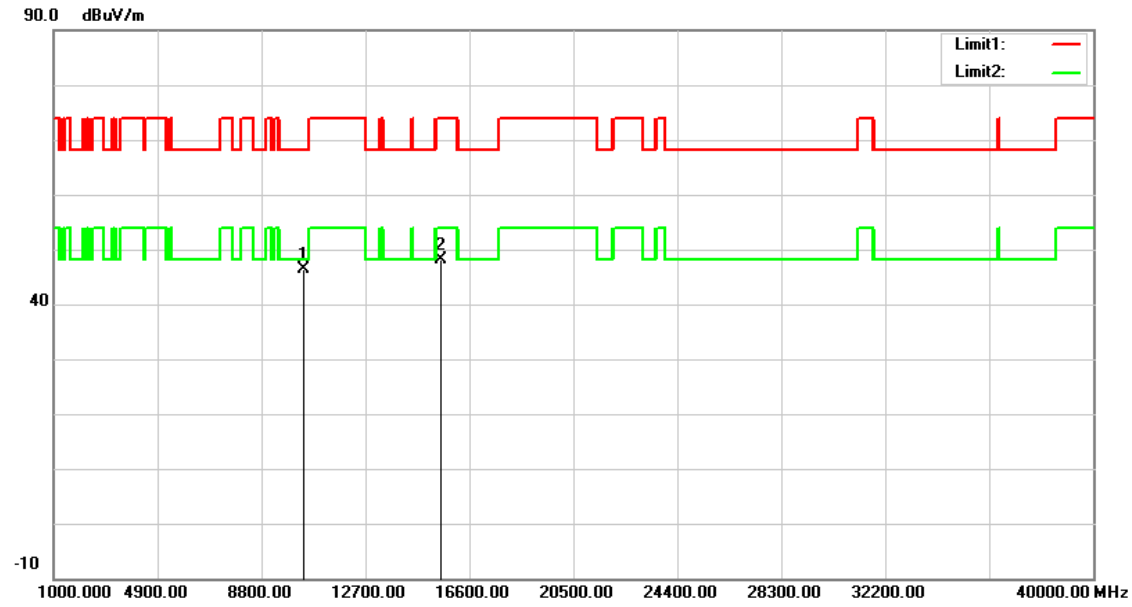

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10360.000	34.74	11.69	46.43	68.20	-21.77	peak
2	15540.000	33.57	14.52	48.09	74.00	-25.91	peak


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

Example: 46.43 = 11.69 + 34.74

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5200 MHz		
Mode:	Mode 13		
Ant.Polar.:	Horizontal		

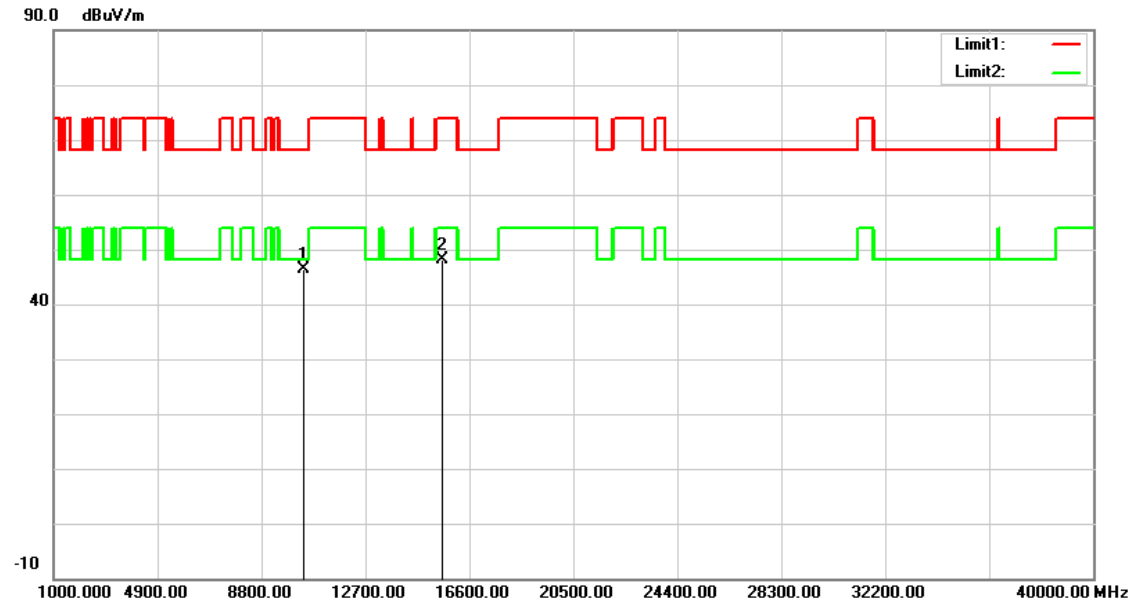


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10400.000	34.63	11.79	46.42	68.20	-21.78	peak
2	15600.000	33.70	14.39	48.09	74.00	-25.91	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5200 MHz		
Mode:	Mode 13		
Ant.Polar.:	Vertical		

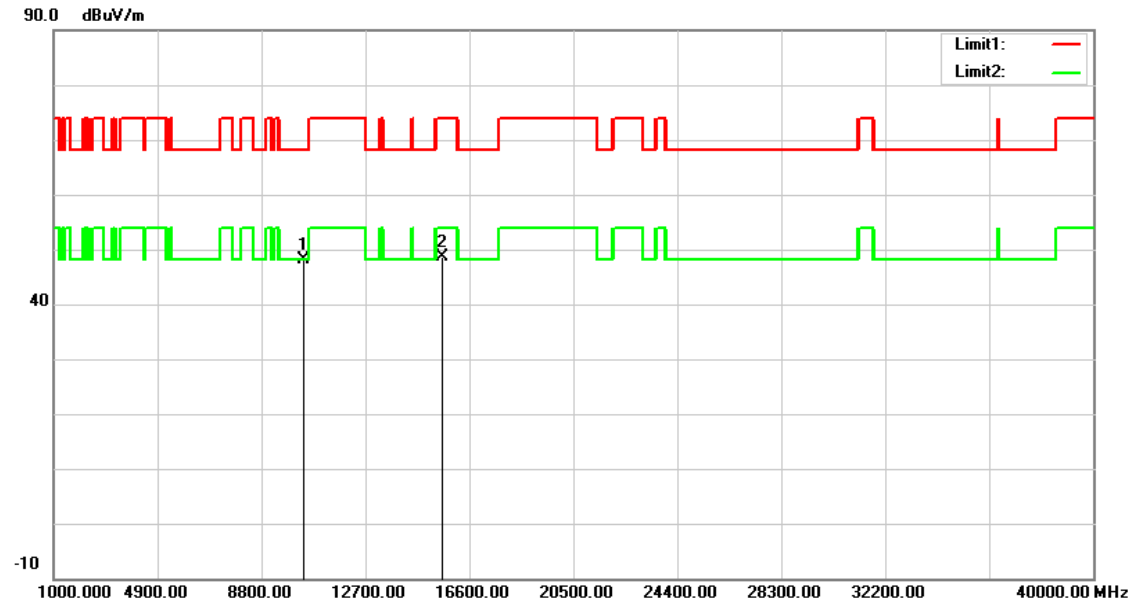


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10400.000	36.36	11.79	48.15	68.20	-20.05	peak
2	15600.000	34.30	14.39	48.69	74.00	-25.31	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5240 MHz		
Mode:	Mode 13		
Ant.Polar.:	Horizontal		

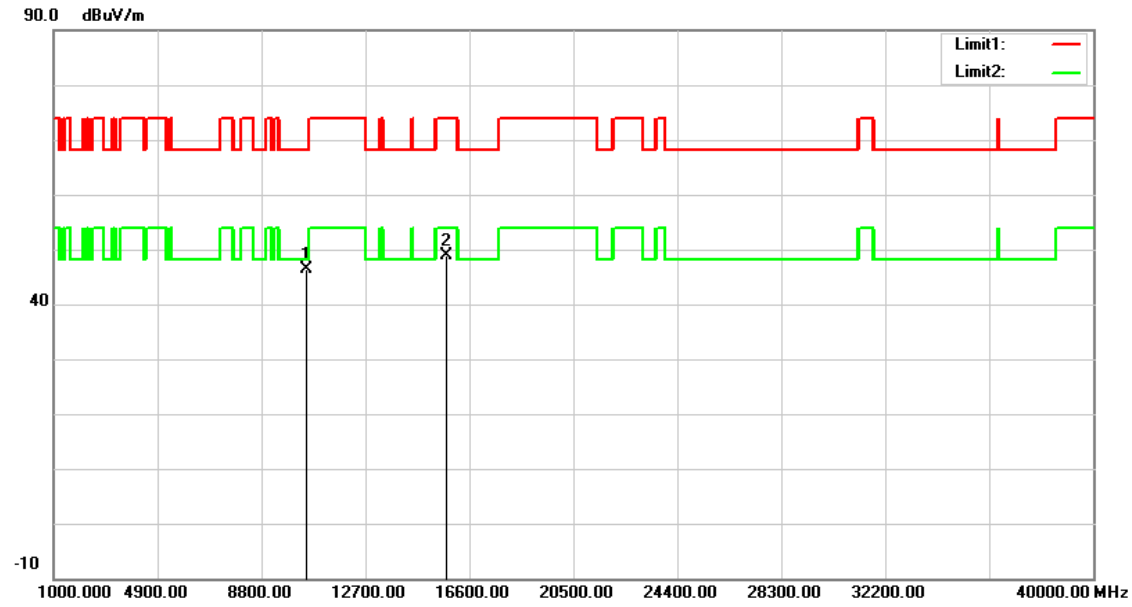


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10480.000	34.41	12.00	46.41	68.20	-21.79	peak
2	15720.000	34.64	14.13	48.77	74.00	-25.23	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5240 MHz		
Mode:	Mode 13		
Ant.Polar.:	Vertical		

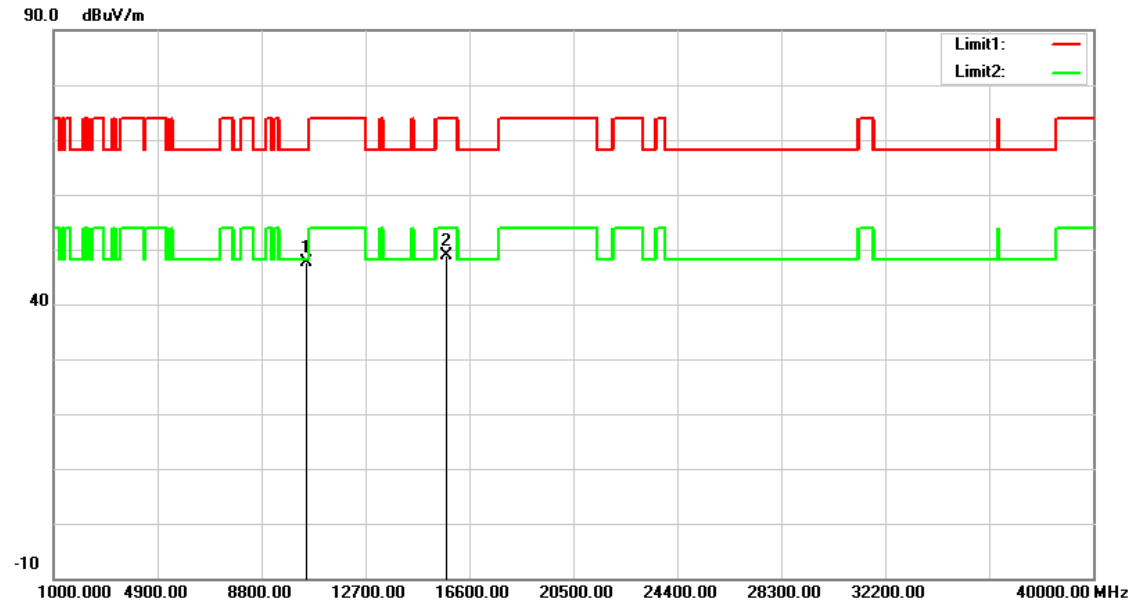


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10480.000	35.52	12.00	47.52	68.20	-20.68	peak
2	15720.000	34.69	14.13	48.82	74.00	-25.18	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5260 MHz		
Mode:	Mode 13		
Ant.Polar.:	Horizontal		

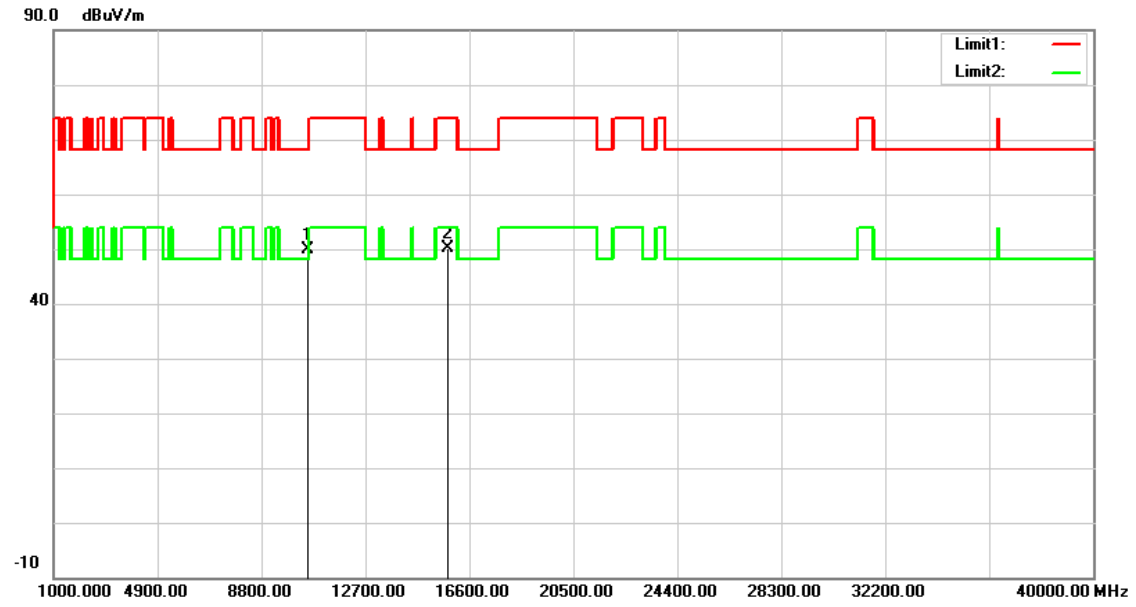


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10520.000	34.00	15.79	49.79	68.20	-18.41	peak
2	15780.000	32.22	17.92	50.14	74.00	-23.86	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5260 MHz		
Mode:	Mode 13		
Ant.Polar.:	Vertical		

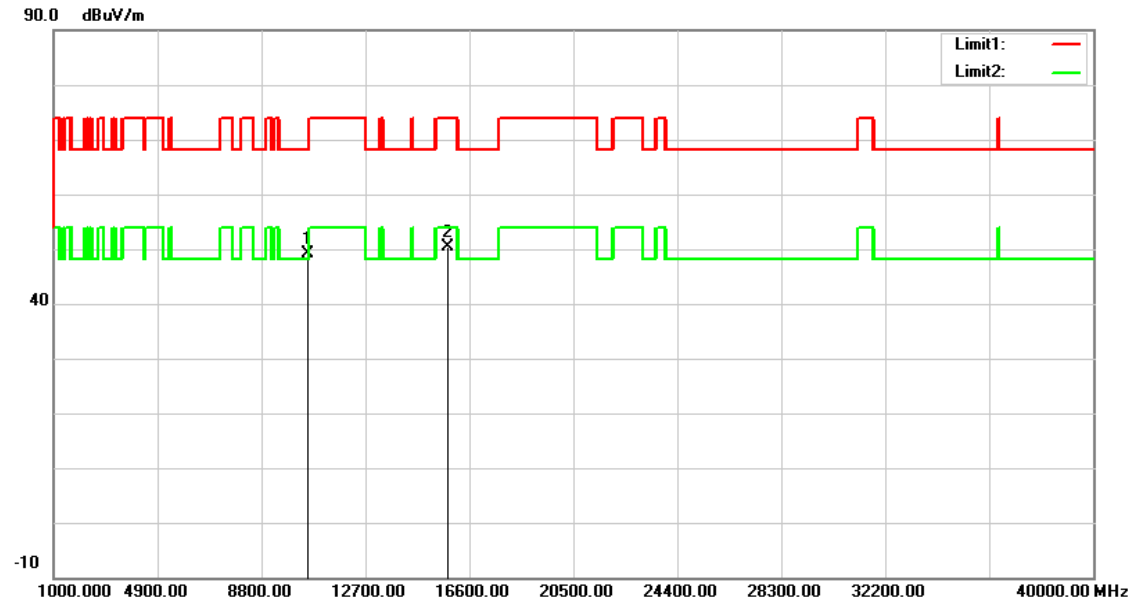


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10520.000	33.40	15.79	49.19	68.20	-19.01	peak
2	15780.000	32.36	17.92	50.28	74.00	-23.72	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5280 MHz		
Mode:	Mode 13		
Ant.Polar.:	Horizontal		

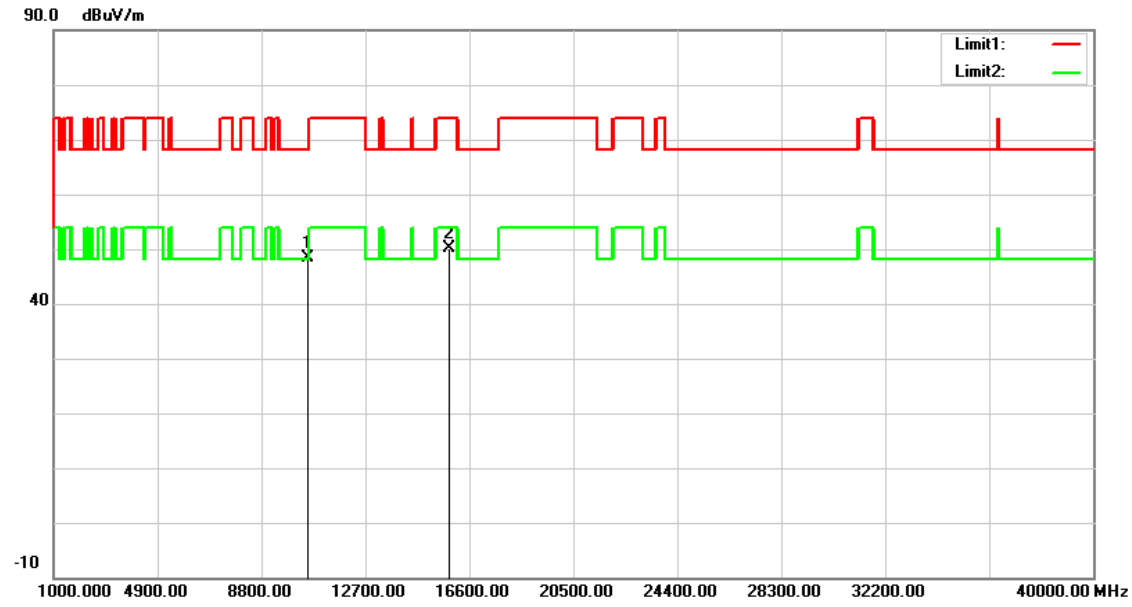


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10560.000	32.48	15.85	48.33	68.20	-19.87	peak
2	15840.000	32.32	17.82	50.14	74.00	-23.86	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5280 MHz		
Mode:	Mode 13		
Ant.Polar.:	Vertical		

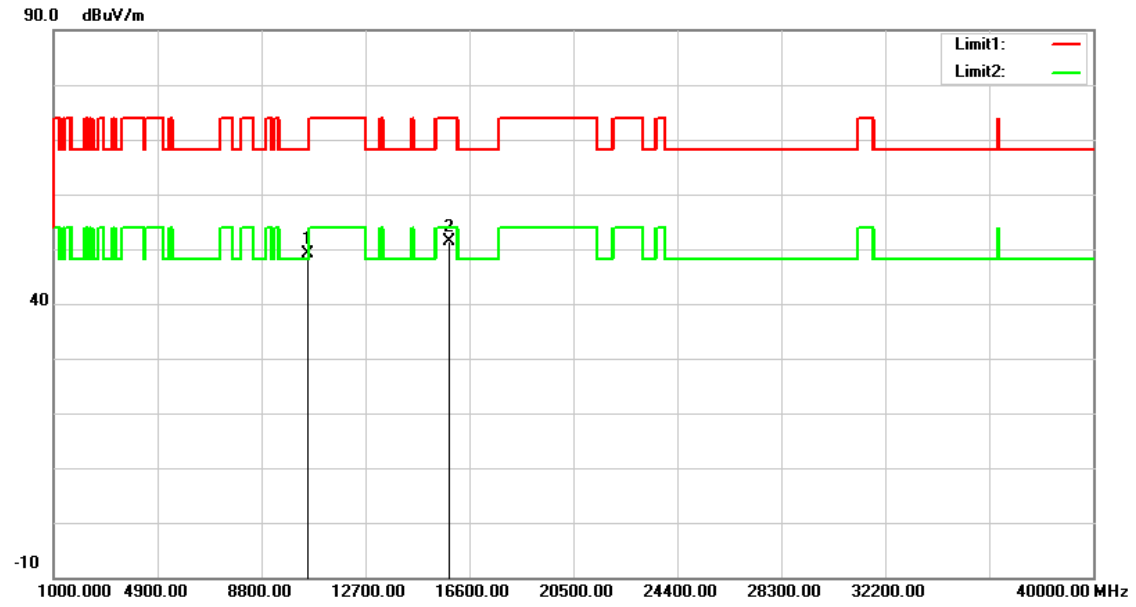


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10560.000	33.38	15.85	49.23	68.20	-18.97	peak
2	15840.000	33.44	17.82	51.26	74.00	-22.74	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5320 MHz		
Mode:	Mode 13		
Ant.Polar.:	Horizontal		

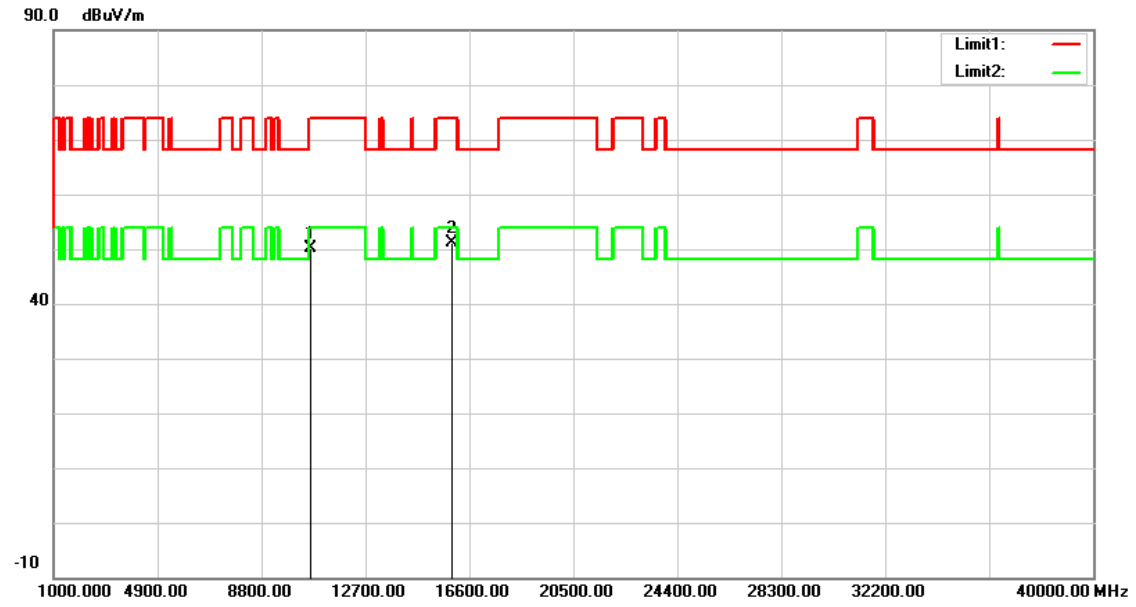


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10640.000	34.07	15.98	50.05	74.00	-23.95	peak
2	15960.000	33.49	17.62	51.11	74.00	-22.89	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5320 MHz		
Mode:	Mode 13		
Ant.Polar.:	Vertical		

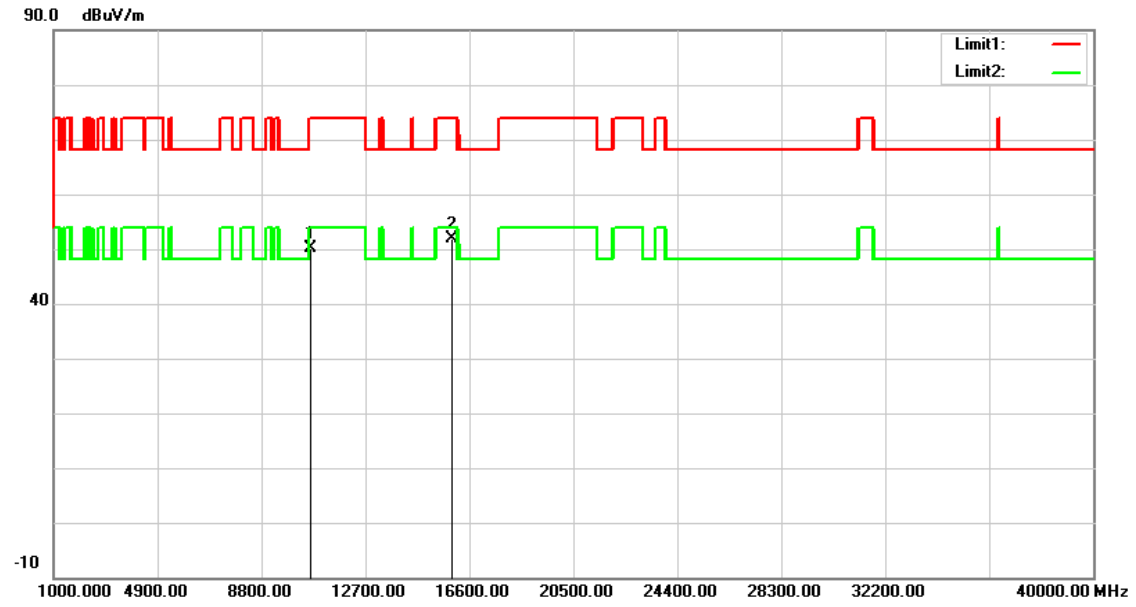


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10640.000	34.07	15.98	50.05	74.00	-23.95	peak
2	15960.000	34.36	17.62	51.98	74.00	-22.02	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5500 MHz		
Mode:	Mode 13		
Ant.Polar.:	Horizontal		

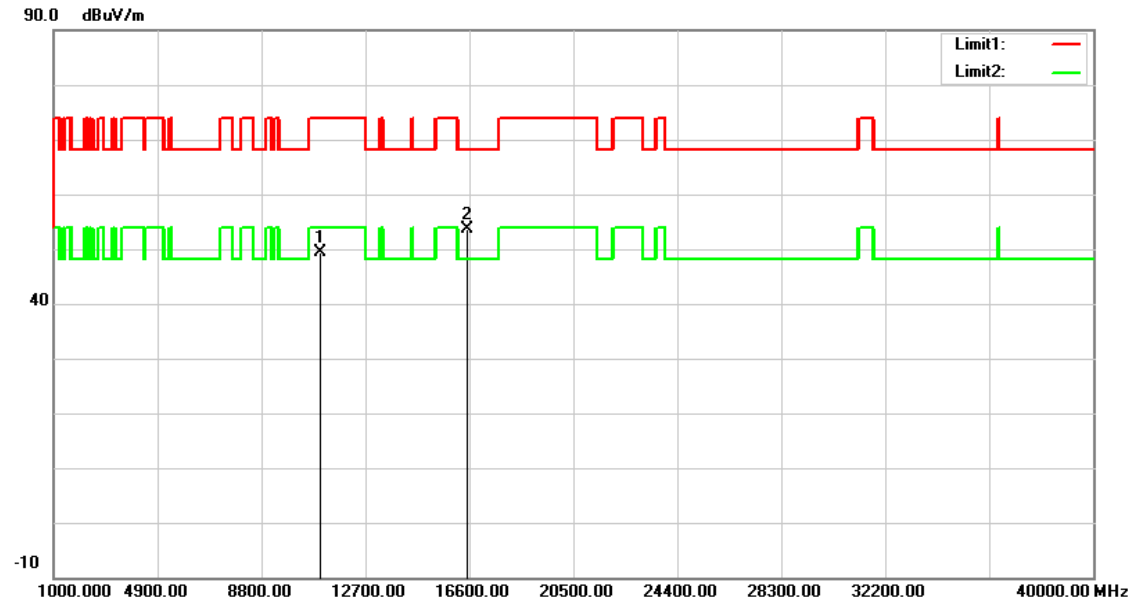


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11000.000	32.72	16.57	49.29	74.00	-24.71	peak
2	16500.000	33.72	19.85	53.57	68.20	-14.63	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5500 MHz		
Mode:	Mode 13		
Ant.Polar.:	Vertical		

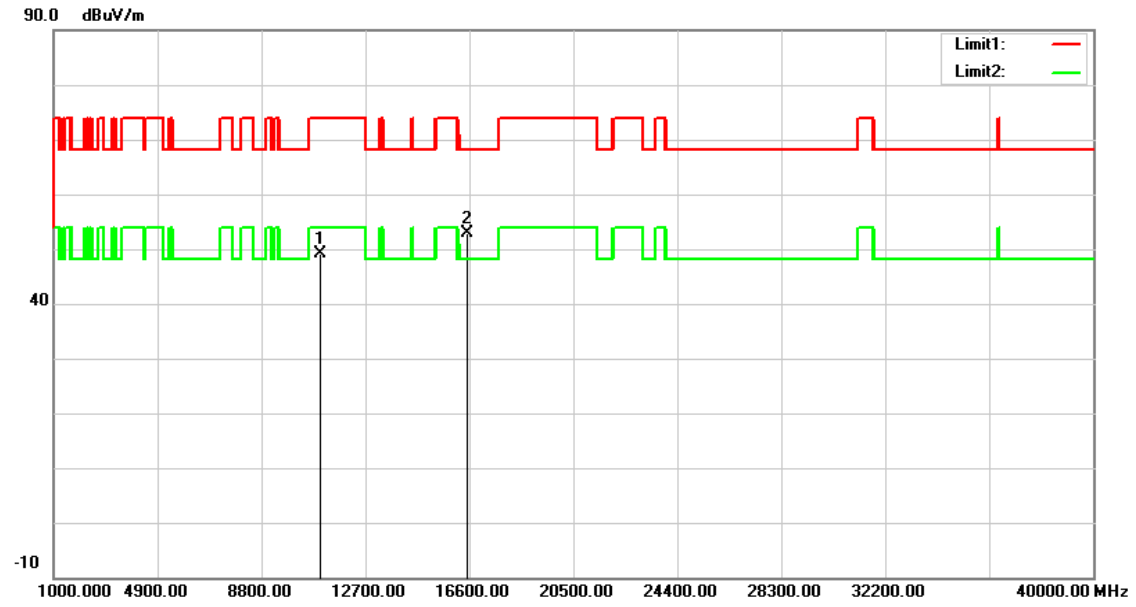


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11000.000	32.52	16.57	49.09	74.00	-24.91	peak
2	16500.000	33.08	19.85	52.93	68.20	-15.27	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5560 MHz		
Mode:	Mode 13		
Ant.Polar.:	Horizontal		

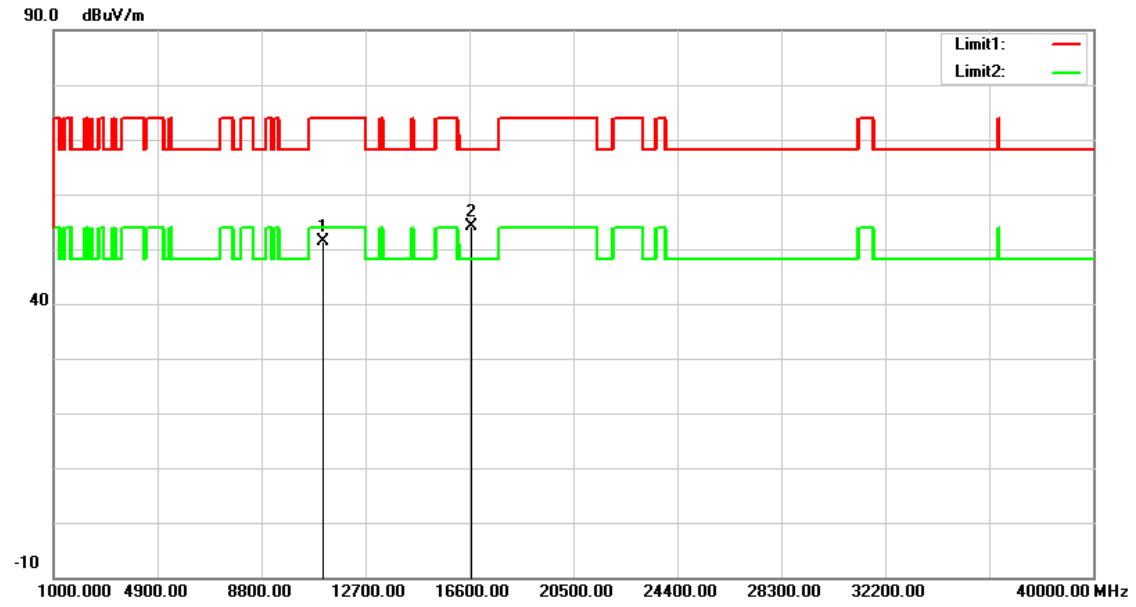


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11120.000	34.56	16.73	51.29	74.00	-22.71	peak
2	16680.000	33.46	20.77	54.23	68.20	-13.97	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5560 MHz		
Mode:	Mode 13		
Ant.Polar.:	Vertical		

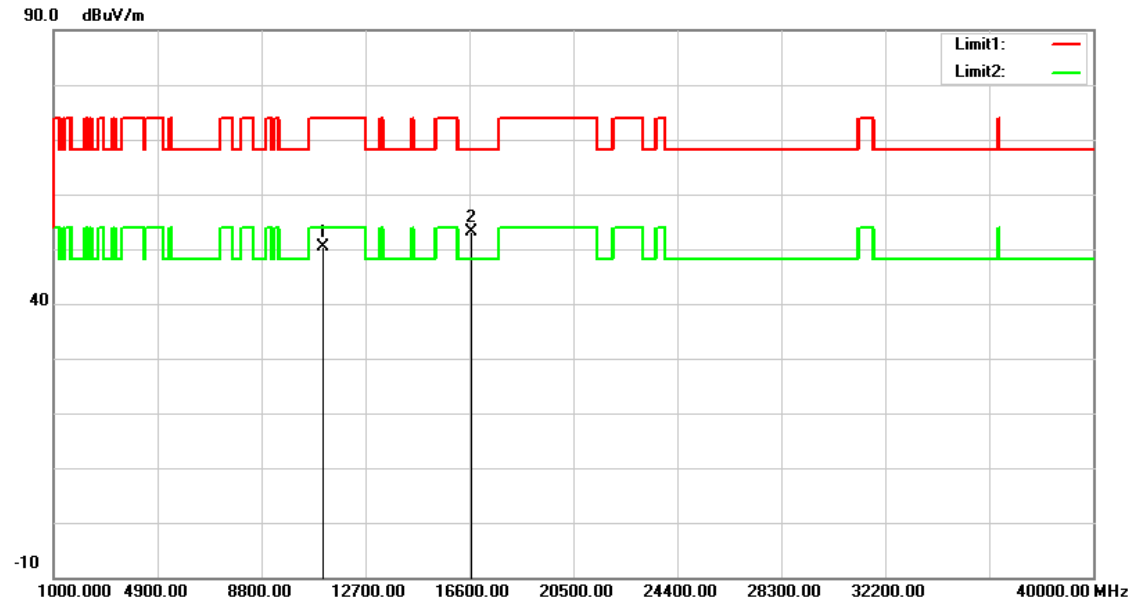


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11120.000	33.60	16.73	50.33	74.00	-23.67	peak
2	16680.000	32.30	20.77	53.07	68.20	-15.13	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5700 MHz		
Mode:	Mode 13		
Ant.Polar.:	Horizontal		

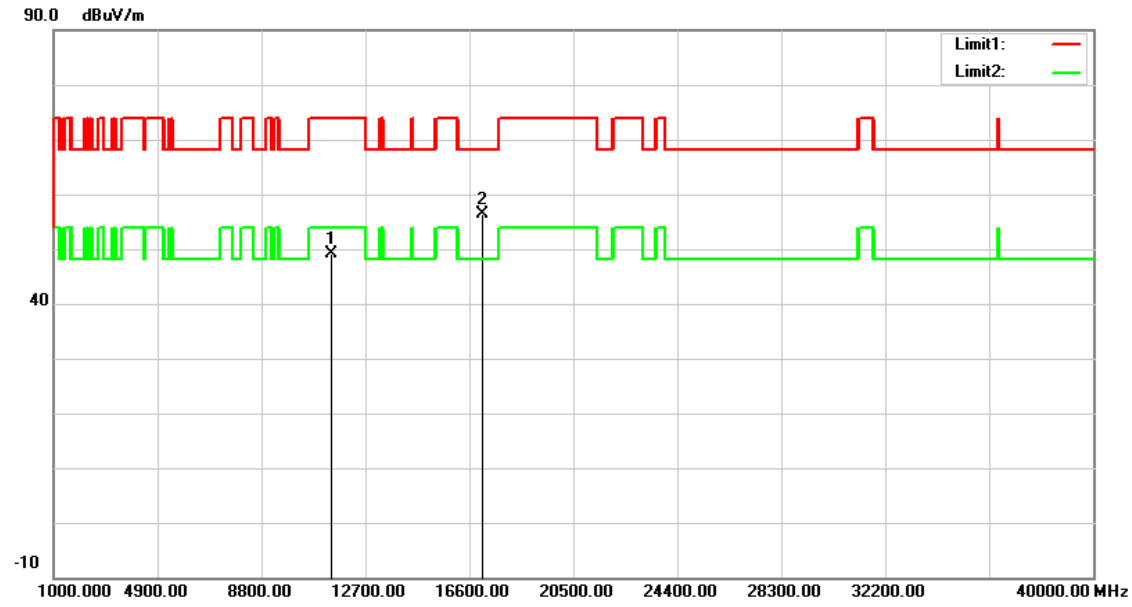


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11400.000	32.04	17.10	49.14	74.00	-24.86	peak
2	17100.000	33.69	22.78	56.47	68.20	-11.73	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5700 MHz		
Mode:	Mode 13		
Ant.Polar.:	Vertical		

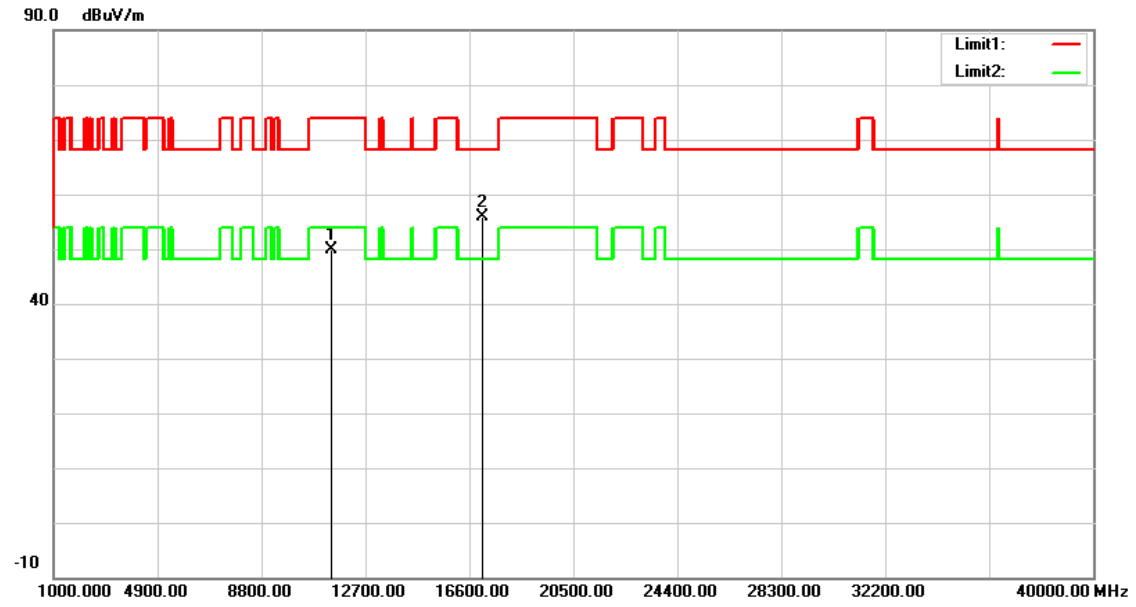


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11400.000	32.70	17.10	49.80	74.00	-24.20	peak
2	17100.000	33.00	22.78	55.78	68.20	-12.42	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5745 MHz		
Mode:	Mode 13		
Ant.Polar.:	Horizontal		

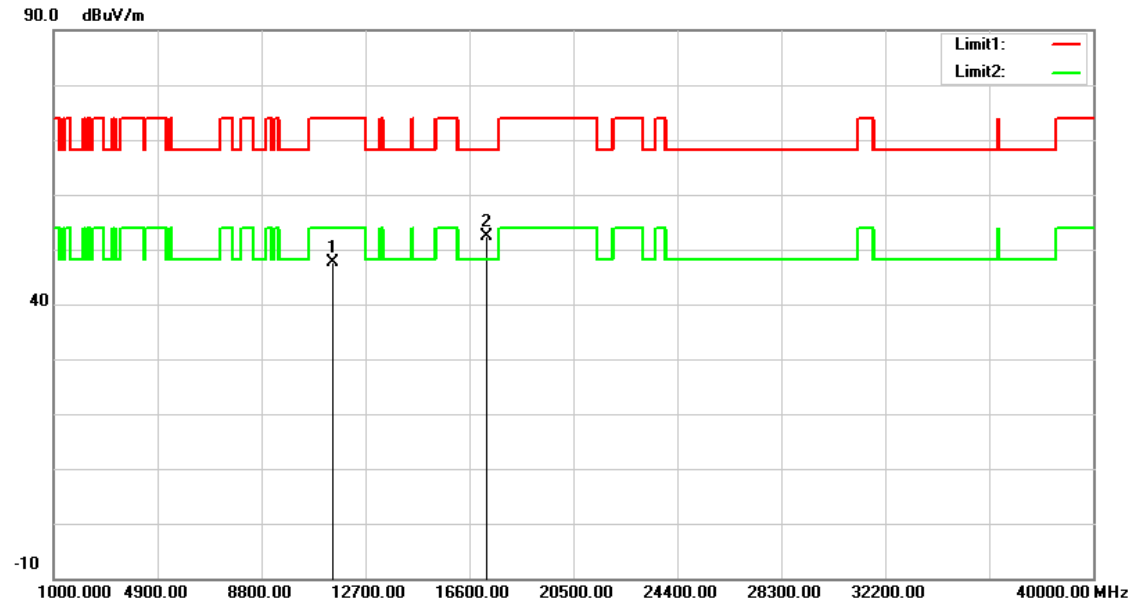


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11490.000	34.91	12.68	47.59	74.00	-26.41	peak
2	17235.000	33.75	18.52	52.27	68.20	-15.93	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5745 MHz		
Mode:	Mode 13		
Ant.Polar.:	Vertical		

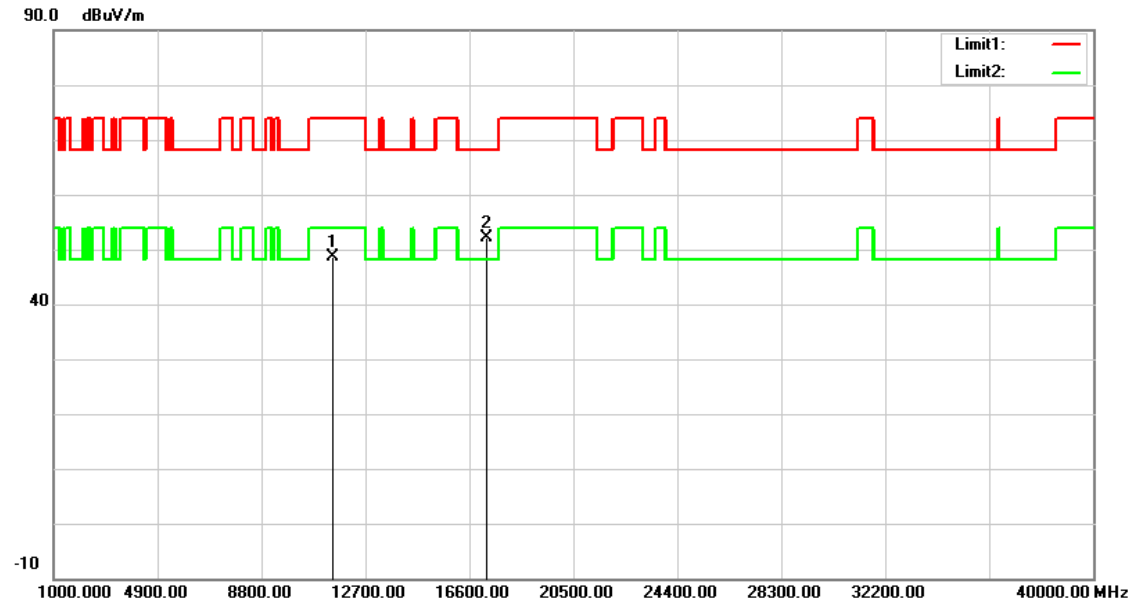


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11490.000	36.01	12.68	48.69	74.00	-25.31	peak
2	17235.000	33.70	18.52	52.22	68.20	-15.98	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5785 MHz		
Mode:	Mode 13		
Ant.Polar.:	Horizontal		

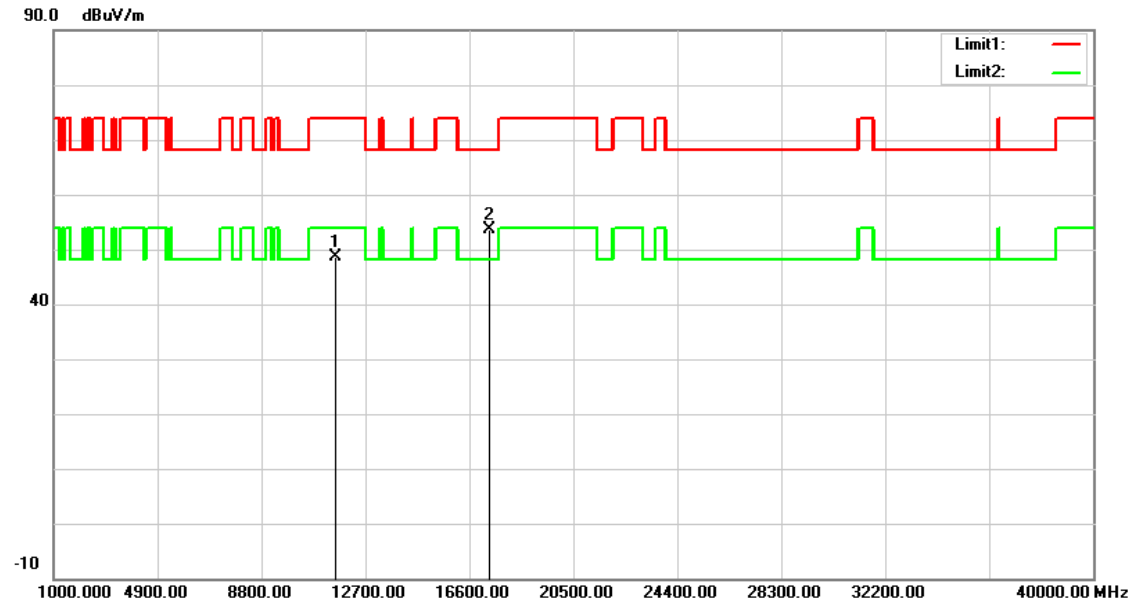


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11570.000	36.15	12.59	48.74	74.00	-25.26	peak
2	17355.000	34.41	19.32	53.73	68.20	-14.47	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5785 MHz		
Mode:	Mode 13		
Ant.Polar.:	Vertical		

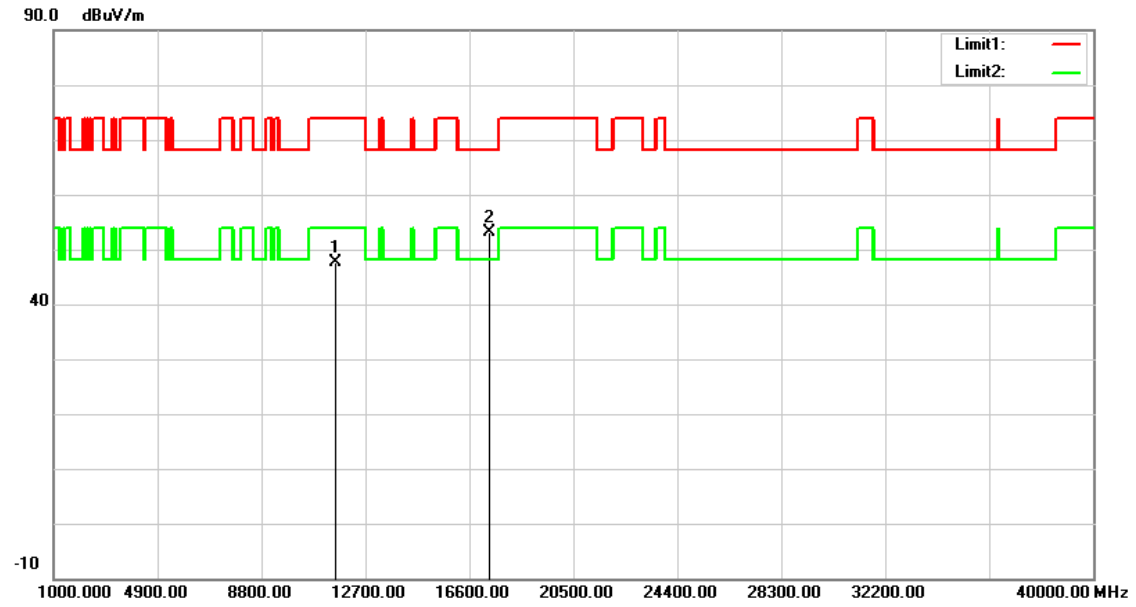


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11570.000	35.03	12.59	47.62	74.00	-26.38	peak
2	17355.000	33.84	19.32	53.16	68.20	-15.04	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5825 MHz		
Mode:	Mode 13		
Ant.Polar.:	Horizontal		

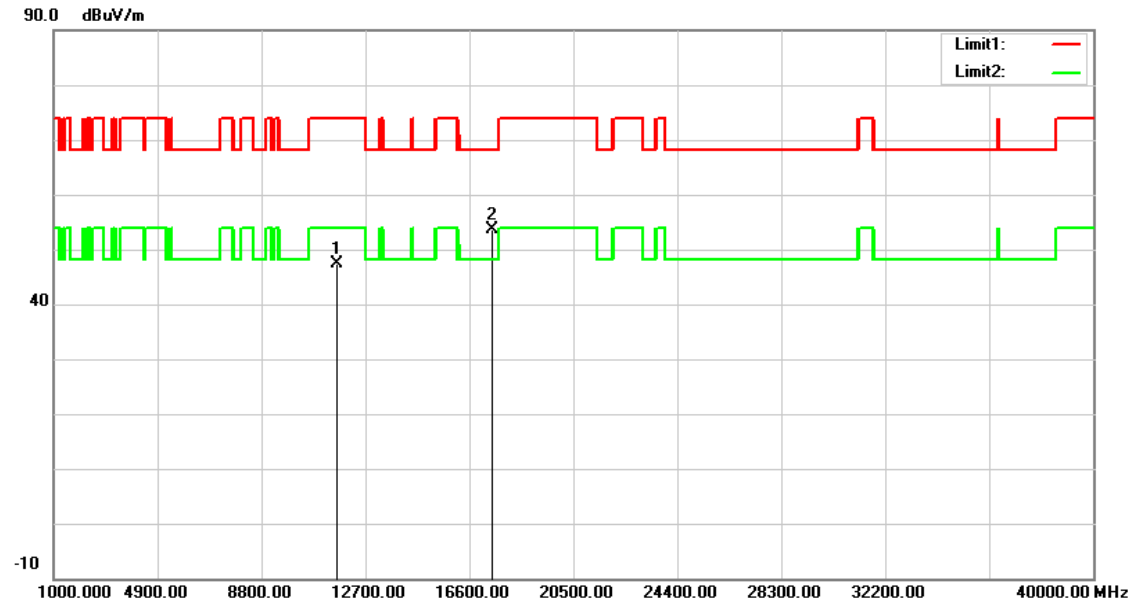


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11650.000	34.84	12.48	47.32	74.00	-26.68	peak
2	17475.000	33.49	20.13	53.62	68.20	-14.58	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5825 MHz		
Mode:	Mode 13		
Ant.Polar.:	Vertical		

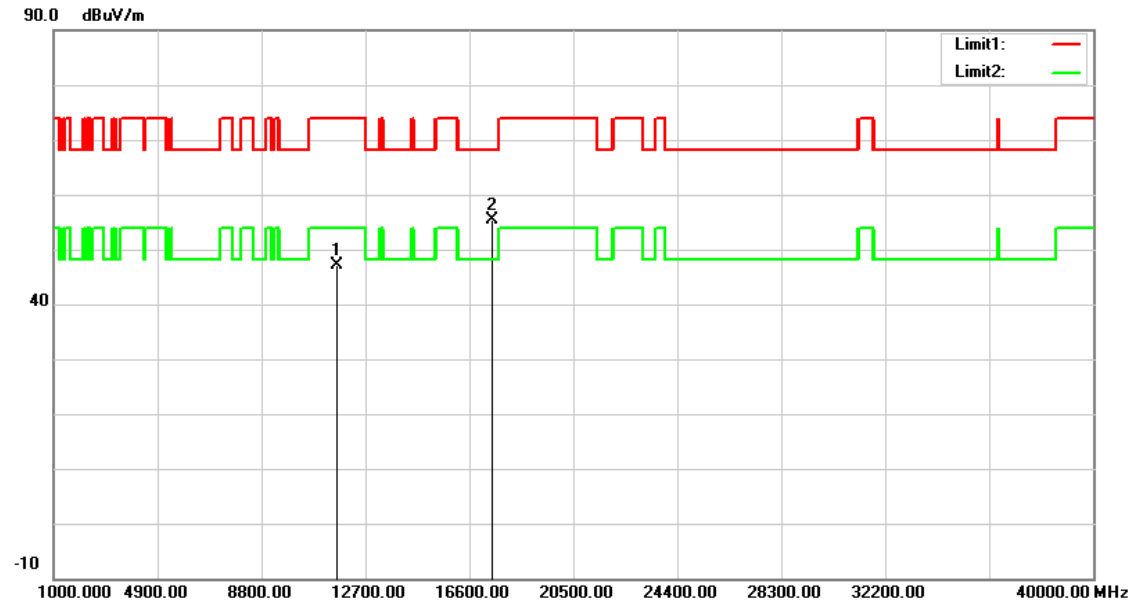


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11650.000	34.69	12.48	47.17	74.00	-26.83	peak
2	17475.000	35.30	20.13	55.43	68.20	-12.77	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5190 MHz		
Mode:	Mode 14		
Ant.Polar.:	Horizontal		

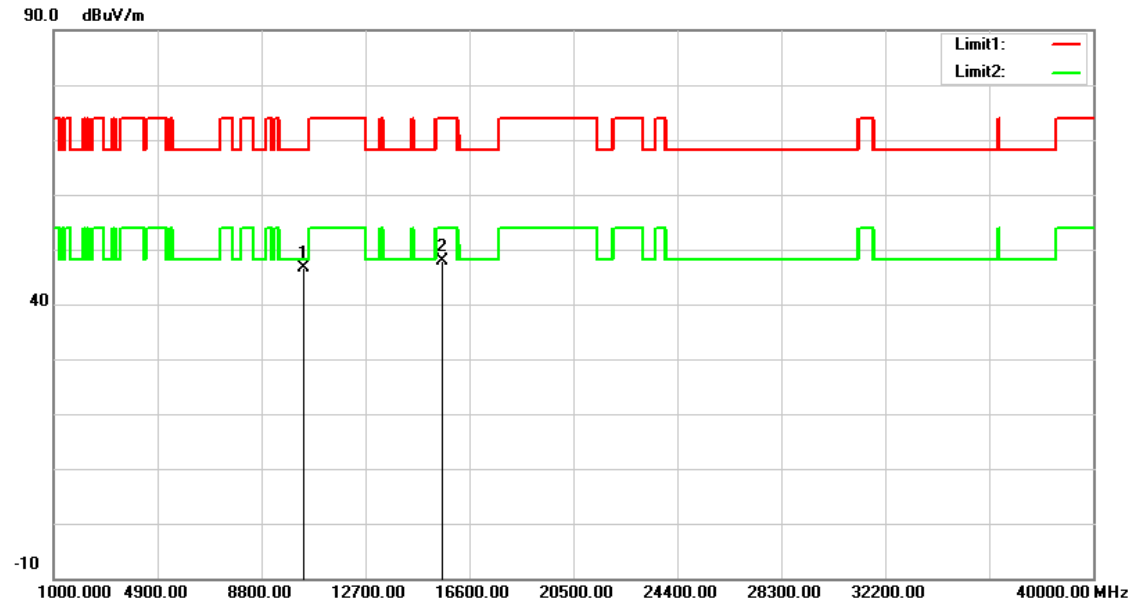


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10380.000	34.99	11.75	46.74	68.20	-21.46	peak
2	15570.000	33.51	14.45	47.96	74.00	-26.04	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5190 MHz		
Mode:	Mode 14		
Ant.Polar.:	Vertical		

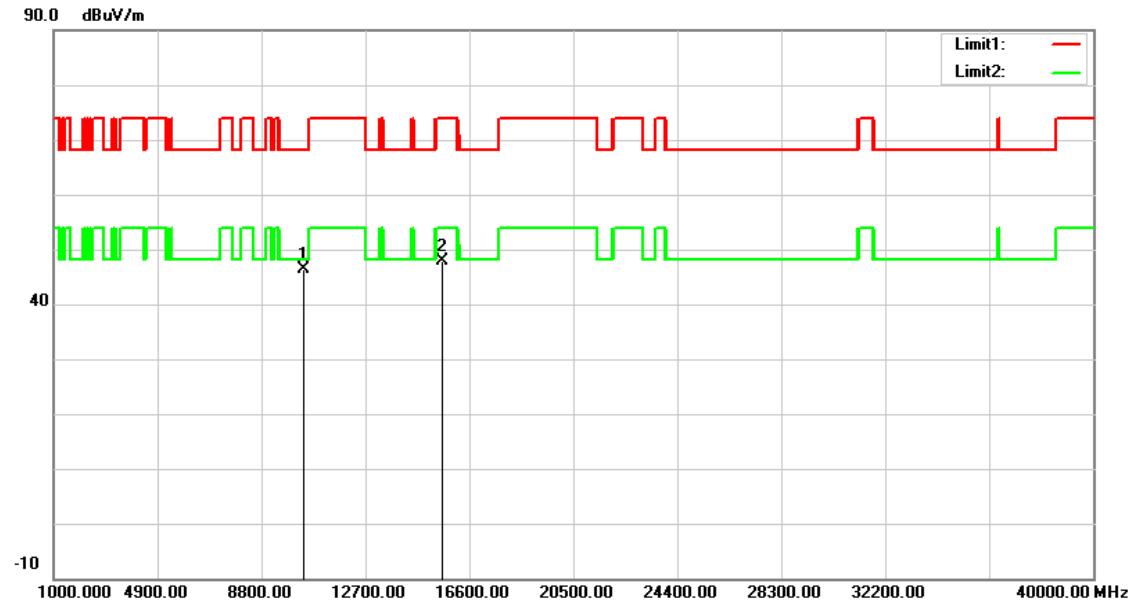


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10380.000	34.55	11.75	46.30	68.20	-21.90	peak
2	15570.000	33.42	14.45	47.87	74.00	-26.13	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5230 MHz		
Mode:	Mode 14		
Ant.Polar.:	Horizontal		

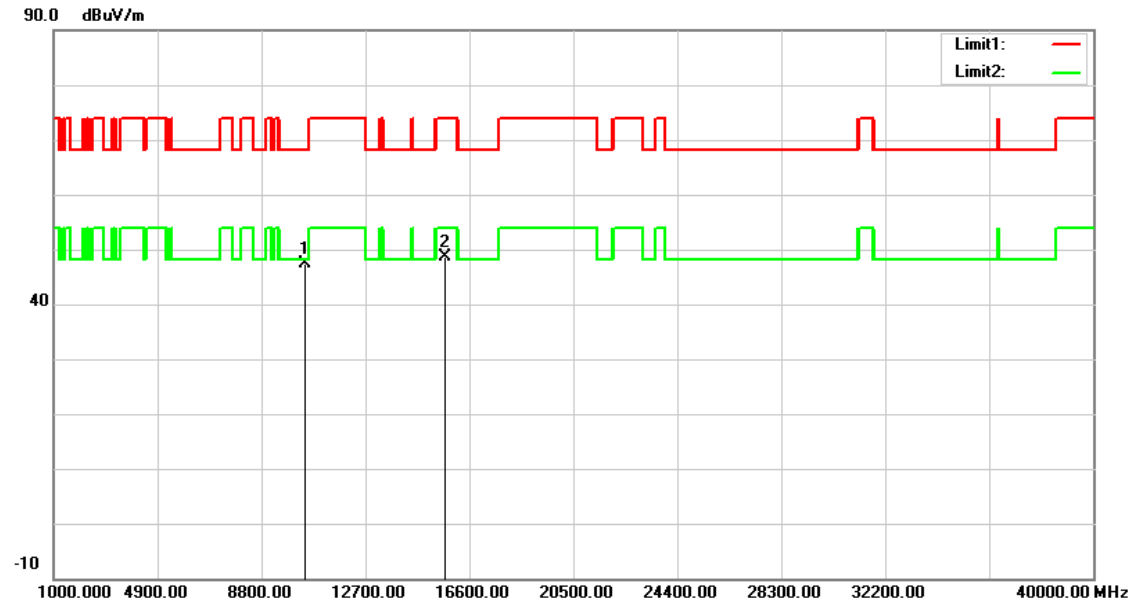


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10460.000	35.37	11.95	47.32	68.20	-20.88	peak
2	15690.000	34.50	14.19	48.69	74.00	-25.31	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5230 MHz		
Mode:	Mode 14		
Ant.Polar.:	Vertical		

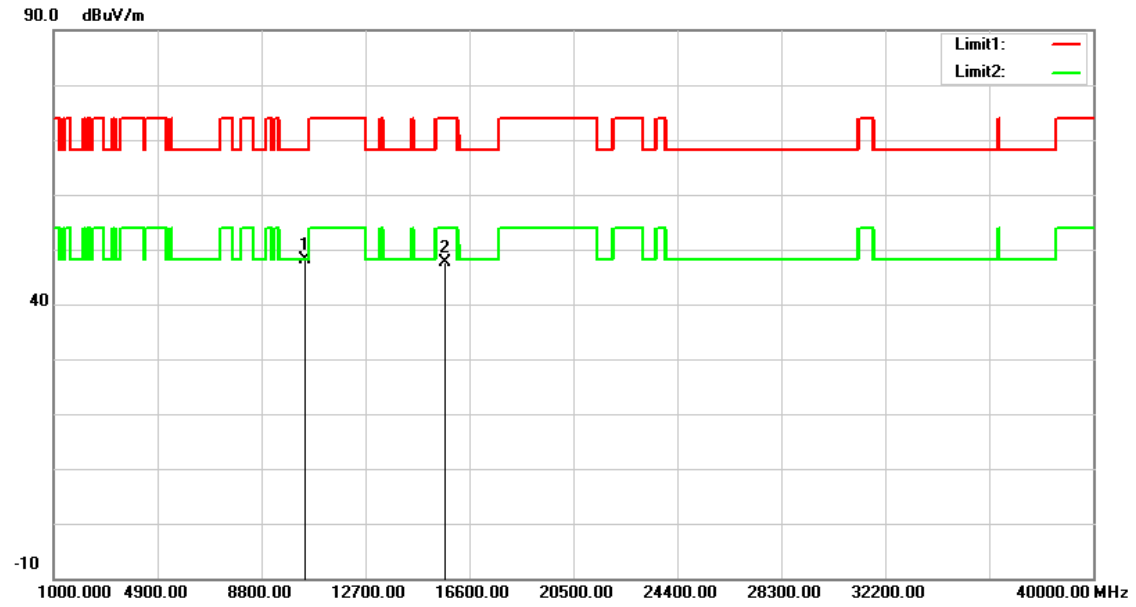


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10460.000	36.30	11.95	48.25	68.20	-19.95	peak
2	15690.000	33.44	14.19	47.63	74.00	-26.37	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5270 MHz		
Mode:	Mode 14		
Ant.Polar.:	Horizontal		

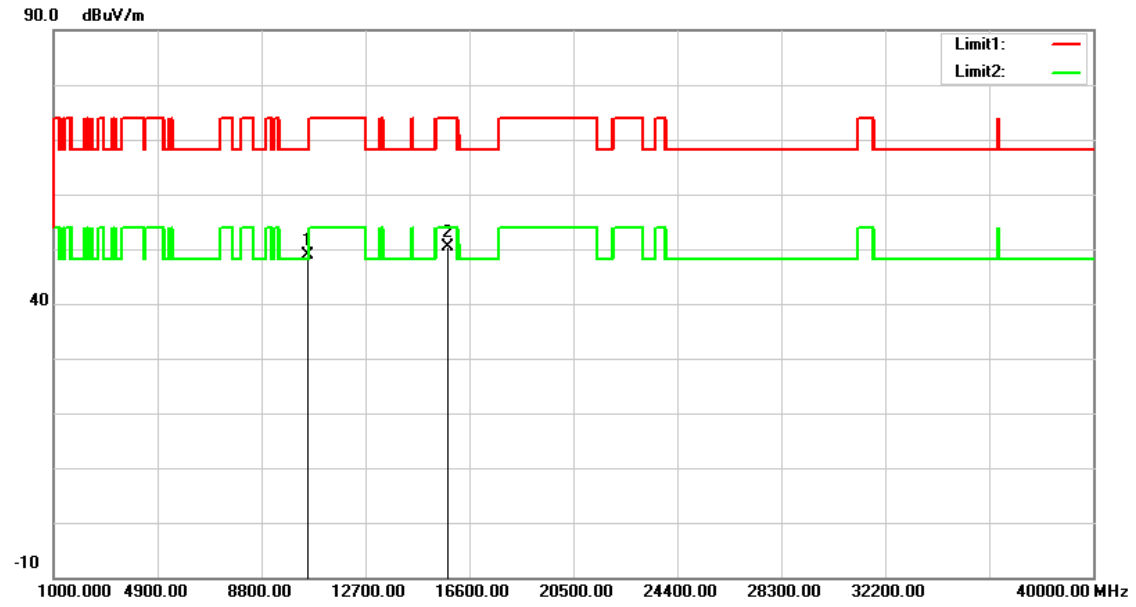


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10540.000	32.97	15.82	48.79	68.20	-19.41	peak
2	15810.000	32.49	17.87	50.36	74.00	-23.64	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5270 MHz		
Mode:	Mode 14		
Ant.Polar.:	Vertical		

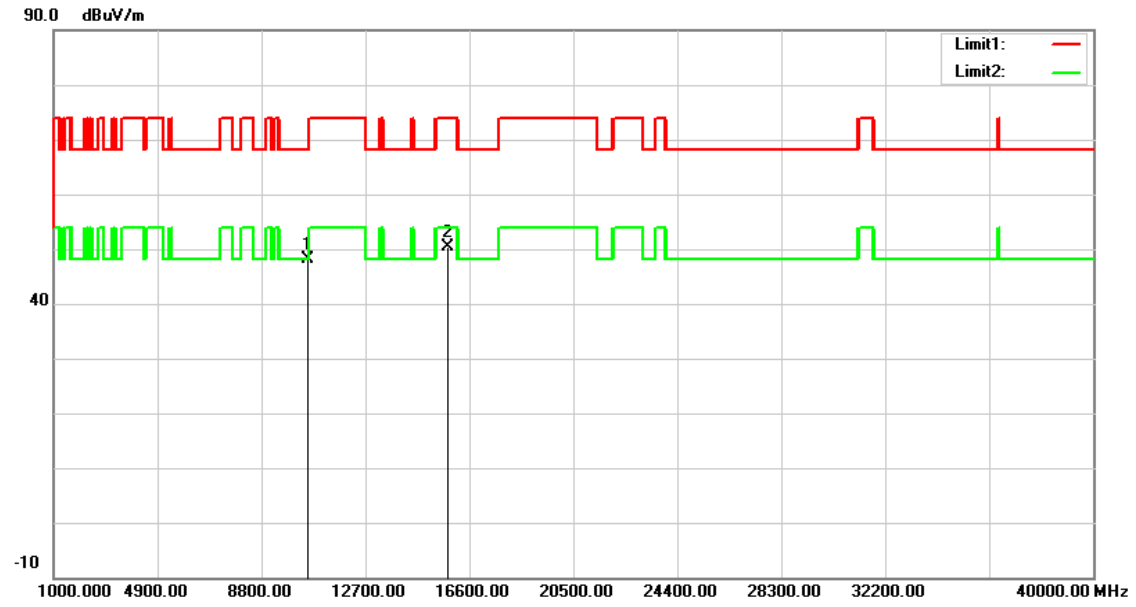


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10540.000	32.41	15.82	48.23	68.20	-19.97	peak
2	15810.000	32.39	17.87	50.26	74.00	-23.74	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5310 MHz		
Mode:	Mode 14		
Ant.Polar.:	Horizontal		

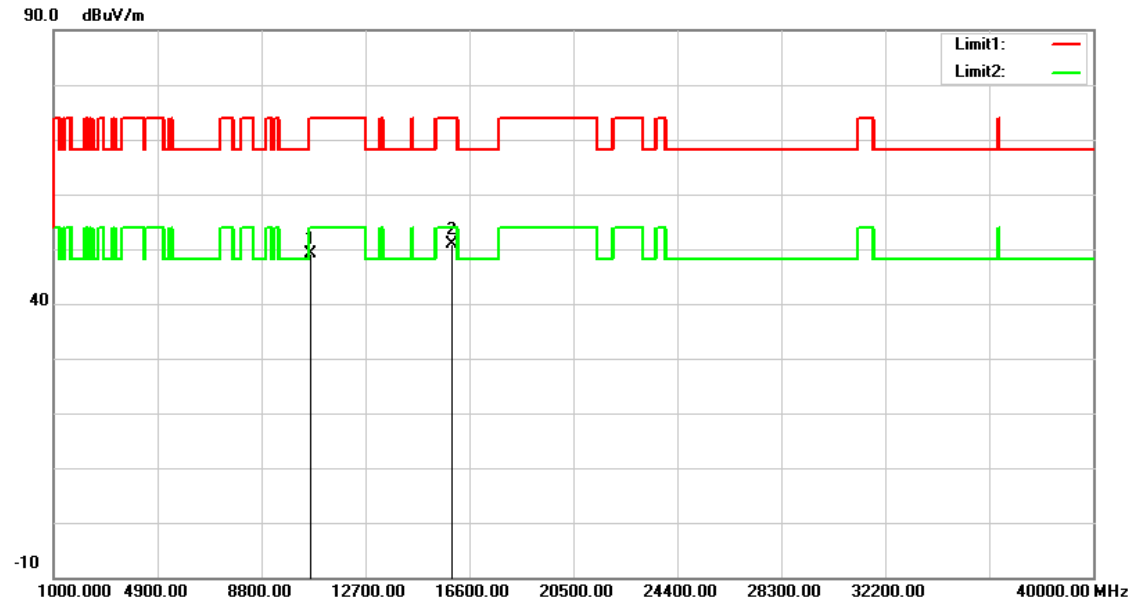


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10620.000	33.14	15.95	49.09	74.00	-24.91	peak
2	15930.000	33.21	17.67	50.88	74.00	-23.12	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5310 MHz		
Mode:	Mode 14		
Ant.Polar.:	Vertical		

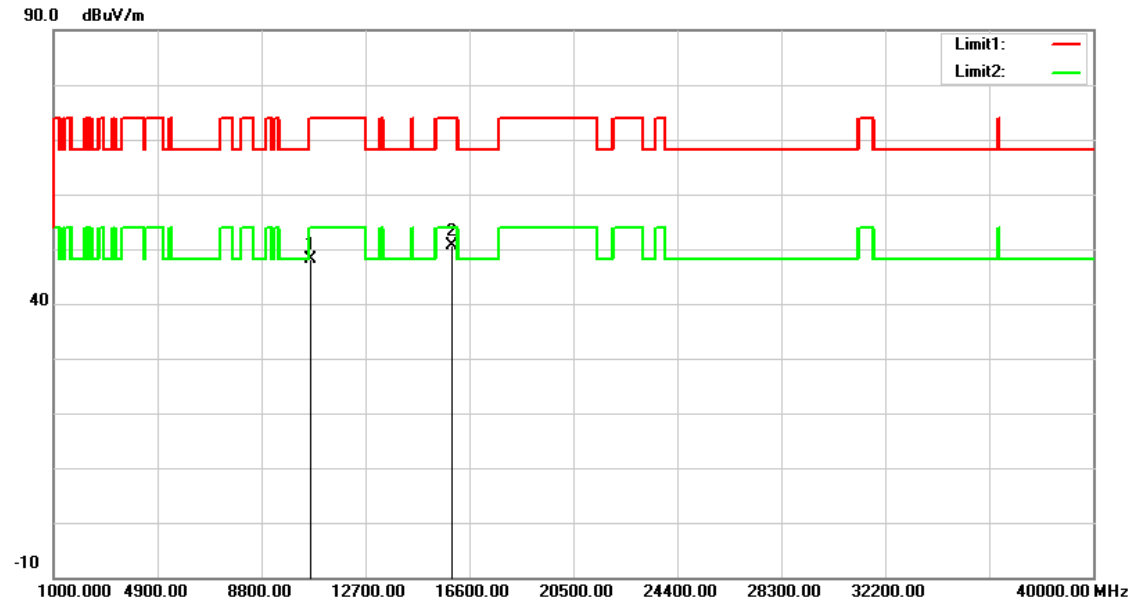


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10620.000	32.12	15.95	48.07	74.00	-25.93	peak
2	15930.000	32.99	17.67	50.66	74.00	-23.34	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5510 MHz		
Mode:	Mode 14		
Ant.Polar.:	Horizontal		

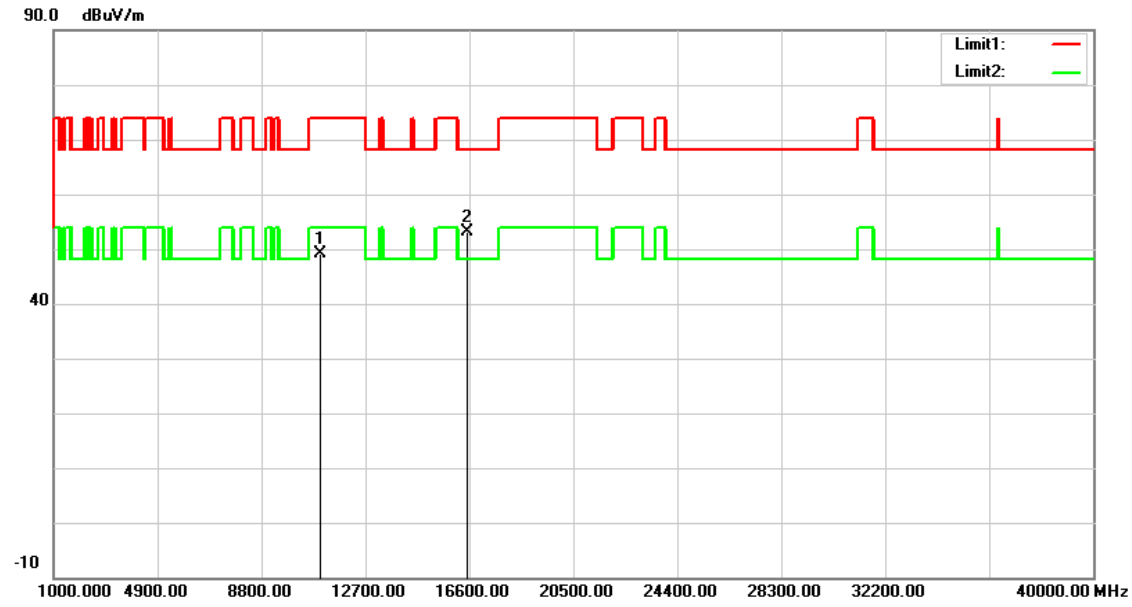


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11020.000	32.42	16.60	49.02	74.00	-24.98	peak
2	16530.000	33.01	20.00	53.01	68.20	-15.19	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5510 MHz		
Mode:	Mode 14		
Ant.Polar.:	Vertical		

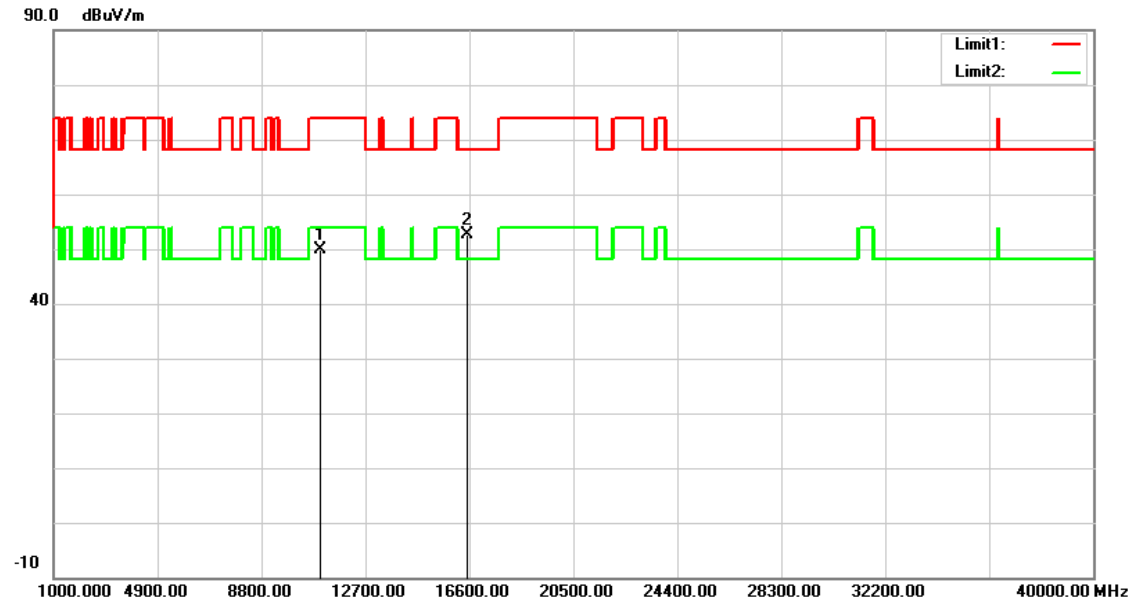


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11020.000	33.38	16.60	49.98	74.00	-24.02	peak
2	16530.000	32.65	20.00	52.65	68.20	-15.55	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5550 MHz		
Mode:	Mode 14		
Ant.Polar.:	Horizontal		

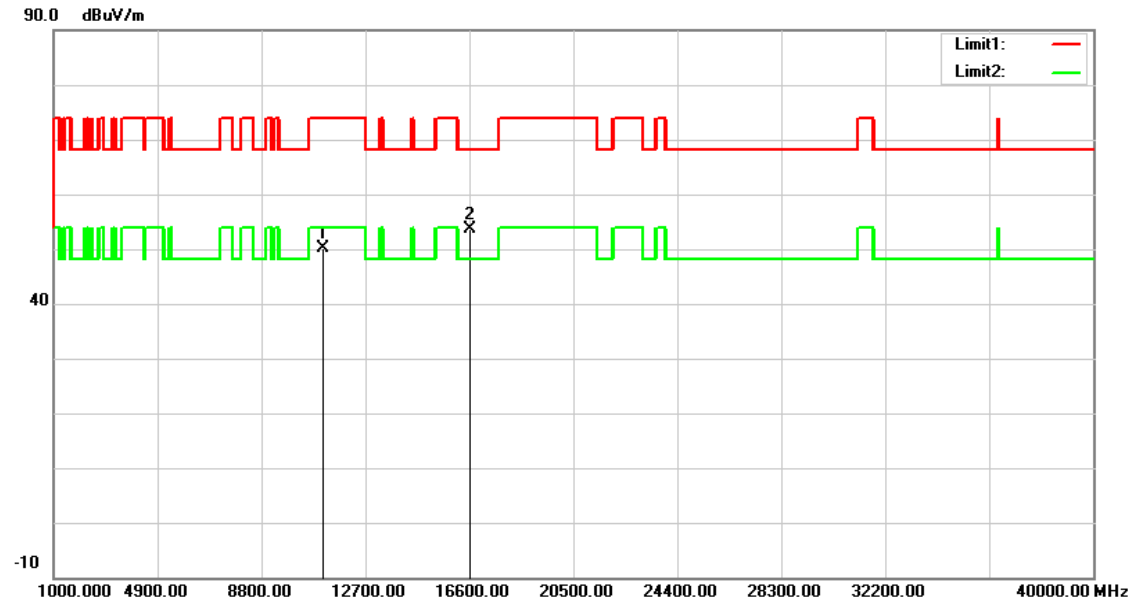


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11100.000	33.40	16.71	50.11	74.00	-23.89	peak
2	16650.000	32.98	20.62	53.60	68.20	-14.60	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5550 MHz		
Mode:	Mode 14		
Ant.Polar.:	Vertical		

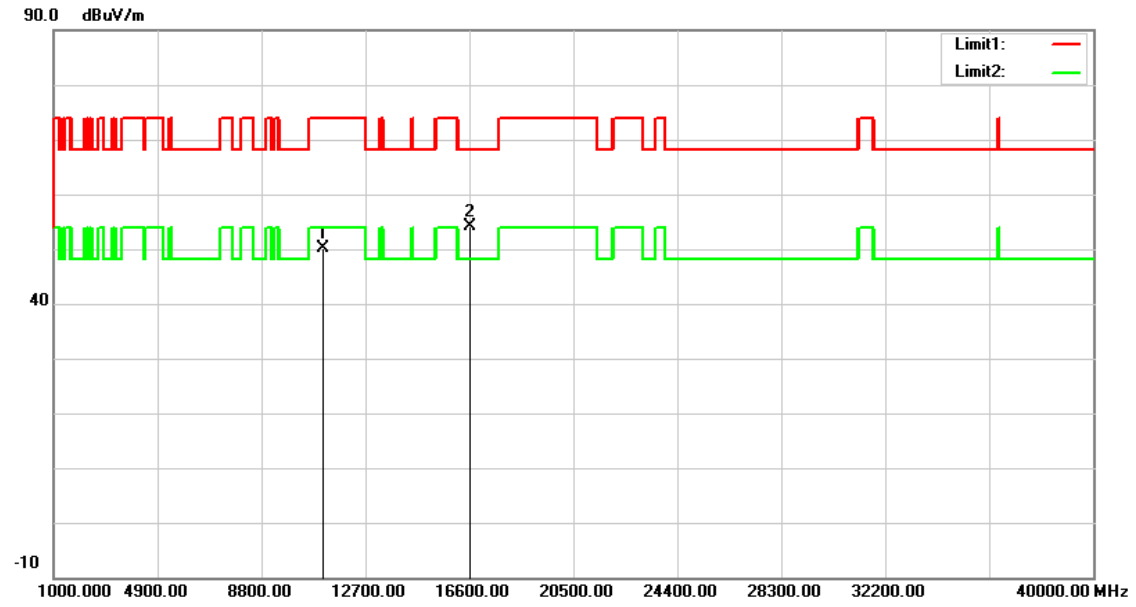


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11100.000	33.53	16.71	50.24	74.00	-23.76	peak
2	16650.000	33.50	20.62	54.12	68.20	-14.08	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5670 MHz		
Mode:	Mode 14		
Ant.Polar.:	Horizontal		

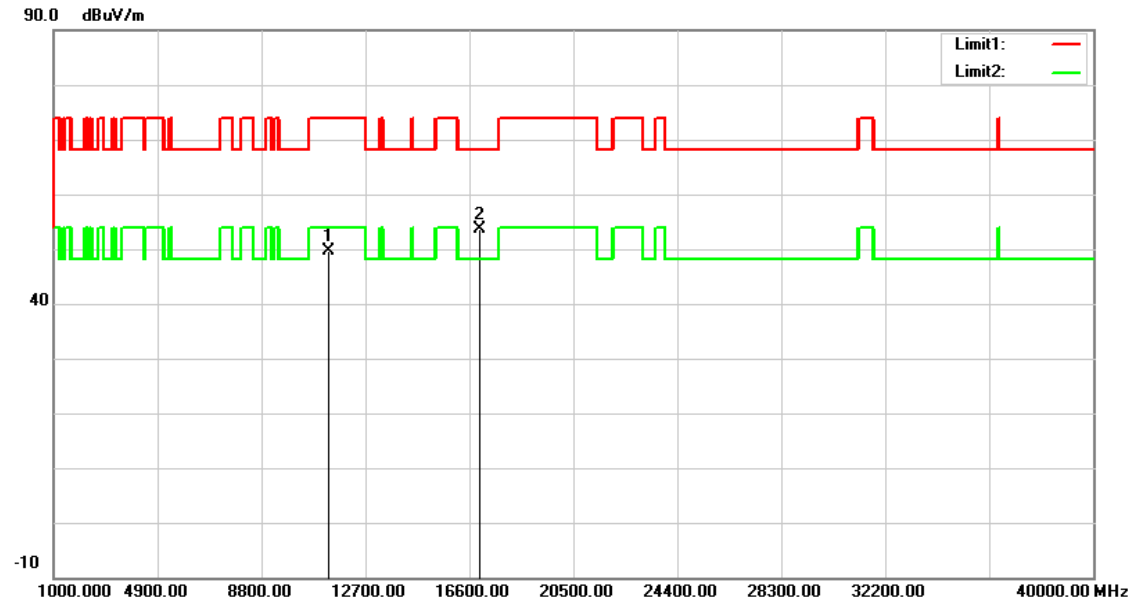


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11340.000	32.51	17.03	49.54	74.00	-24.46	peak
2	17010.000	31.25	22.46	53.71	68.20	-14.49	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5670 MHz		
Mode:	Mode 14		
Ant.Polar.:	Vertical		

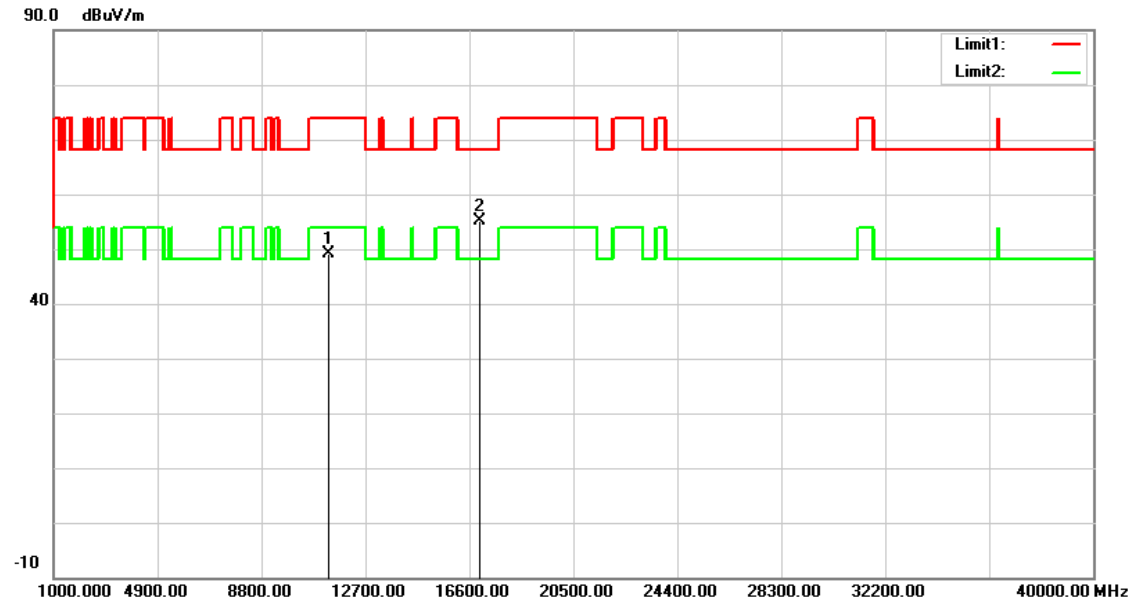


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11340.000	32.02	17.03	49.05	74.00	-24.95	peak
2	17010.000	32.60	22.46	55.06	68.20	-13.14	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5755 MHz		
Mode:	Mode 14		
Ant.Polar.:	Horizontal		

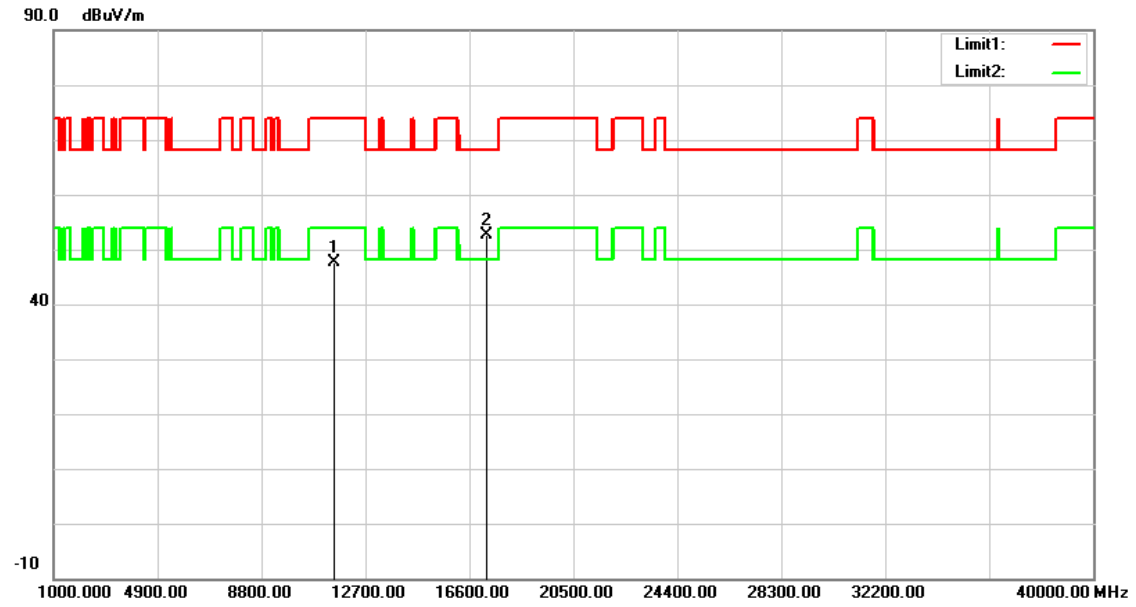


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11510.000	34.98	12.68	47.66	74.00	-26.34	peak
2	17265.000	33.95	18.72	52.67	68.20	-15.53	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5755 MHz		
Mode:	Mode 14		
Ant.Polar.:	Vertical		

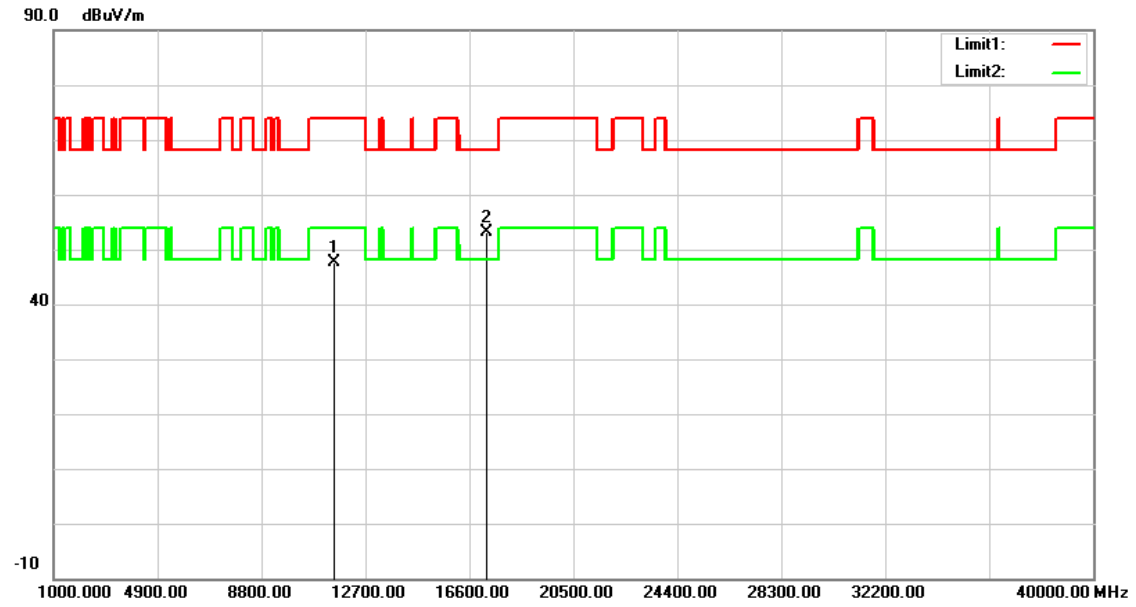


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11510.000	34.95	12.68	47.63	74.00	-26.37	peak
2	17265.000	34.48	18.72	53.20	68.20	-15.00	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5795 MHz		
Mode:	Mode 14		
Ant.Polar.:	Horizontal		

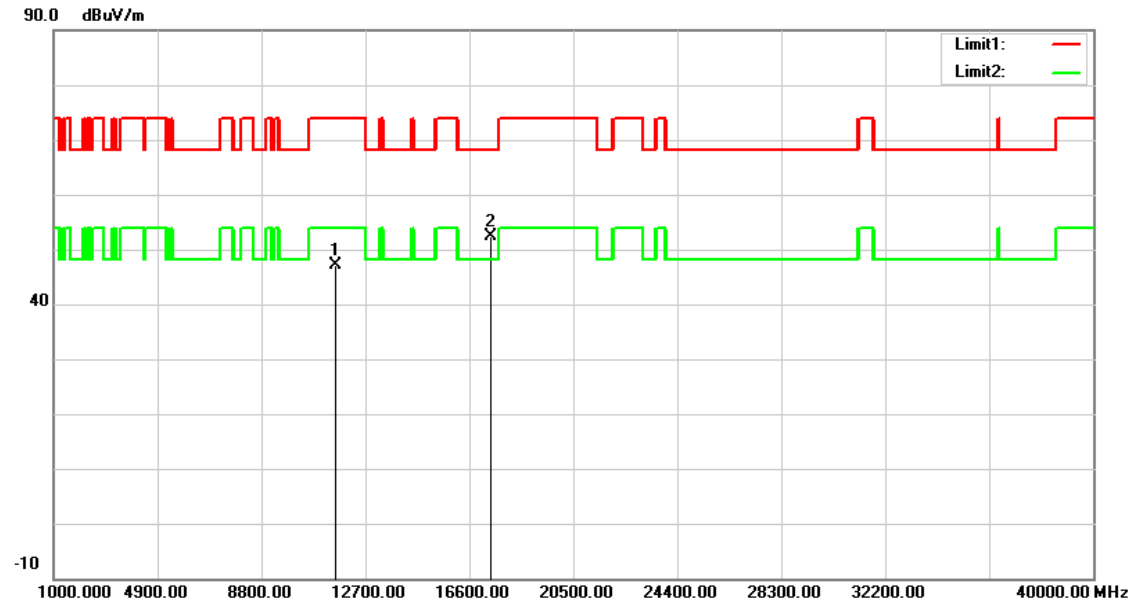


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11590.000	34.51	12.56	47.07	74.00	-26.93	peak
2	17385.000	32.95	19.52	52.47	68.20	-15.73	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5795 MHz		
Mode:	Mode 14		
Ant.Polar.:	Vertical		

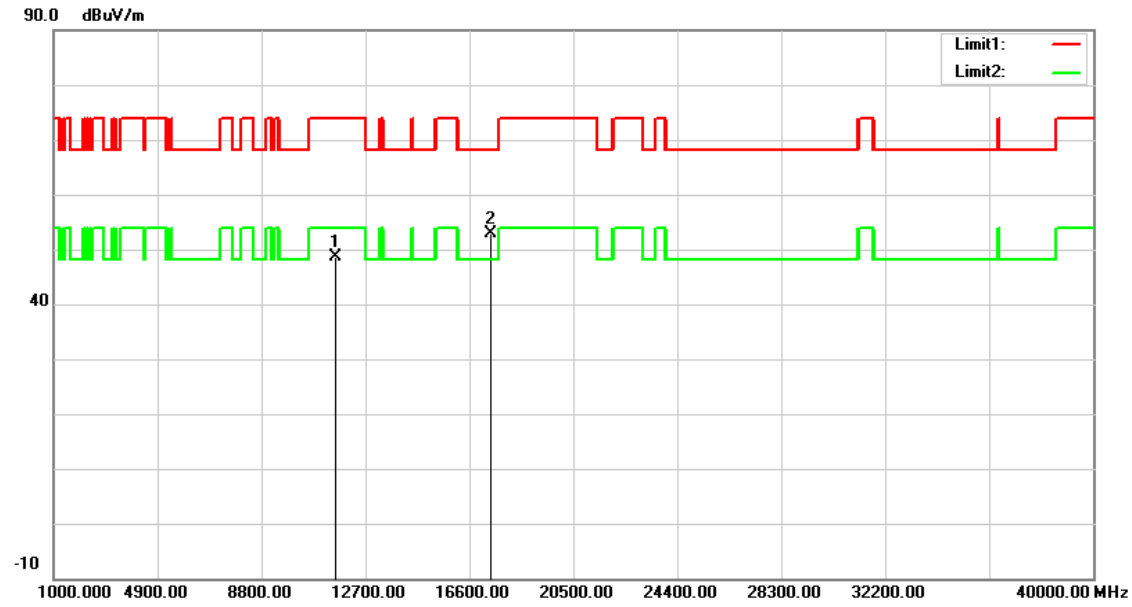


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11590.000	36.06	12.56	48.62	74.00	-25.38	peak
2	17385.000	33.32	19.52	52.84	68.20	-15.36	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5210 MHz		
Mode:	Mode 15		
Ant.Polar.:	Horizontal		

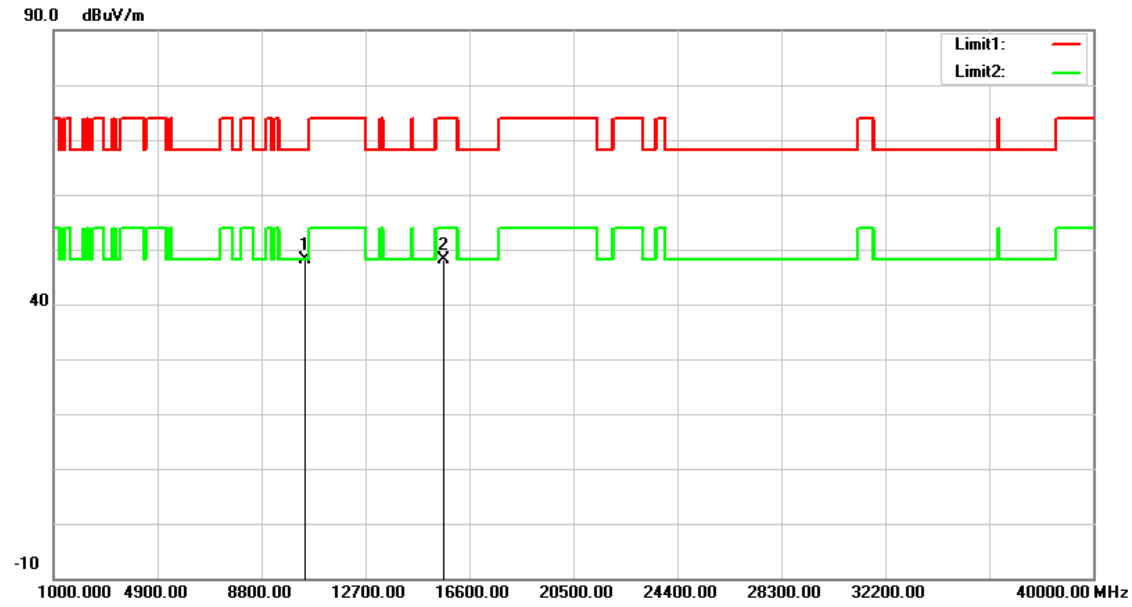


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10420.000	36.40	11.85	48.25	68.20	-19.95	peak
2	15630.000	33.76	14.33	48.09	74.00	-25.91	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5210 MHz		
Mode:	Mode 15		
Ant.Polar.:	Vertical		

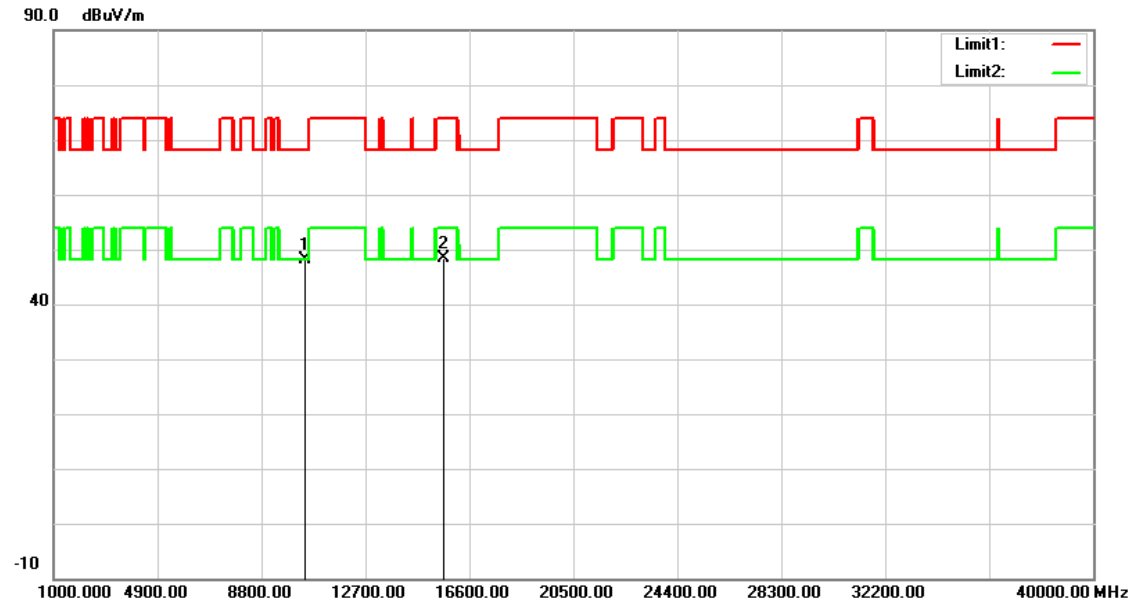


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10420.000	36.35	11.85	48.20	68.20	-20.00	peak
2	15630.000	34.03	14.33	48.36	74.00	-25.64	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5290 MHz		
Mode:	Mode 15		
Ant.Polar.:	Horizontal		

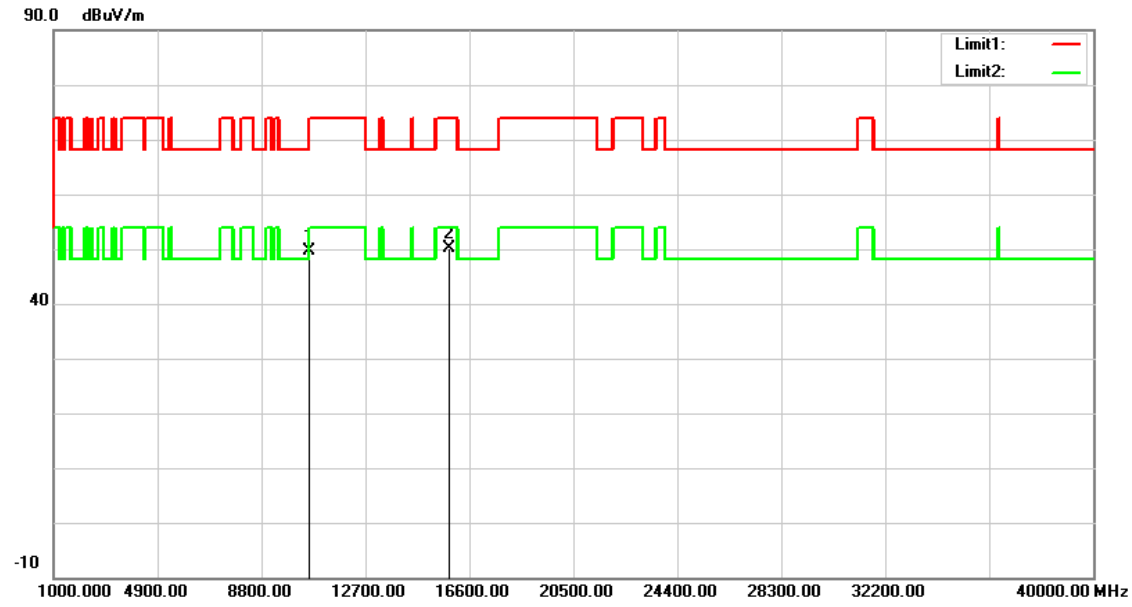


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10580.000	33.68	15.88	49.56	68.20	-18.64	peak
2	15870.000	32.38	17.77	50.15	74.00	-23.85	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5290 MHz		
Mode:	Mode 15		
Ant.Polar.:	Vertical		

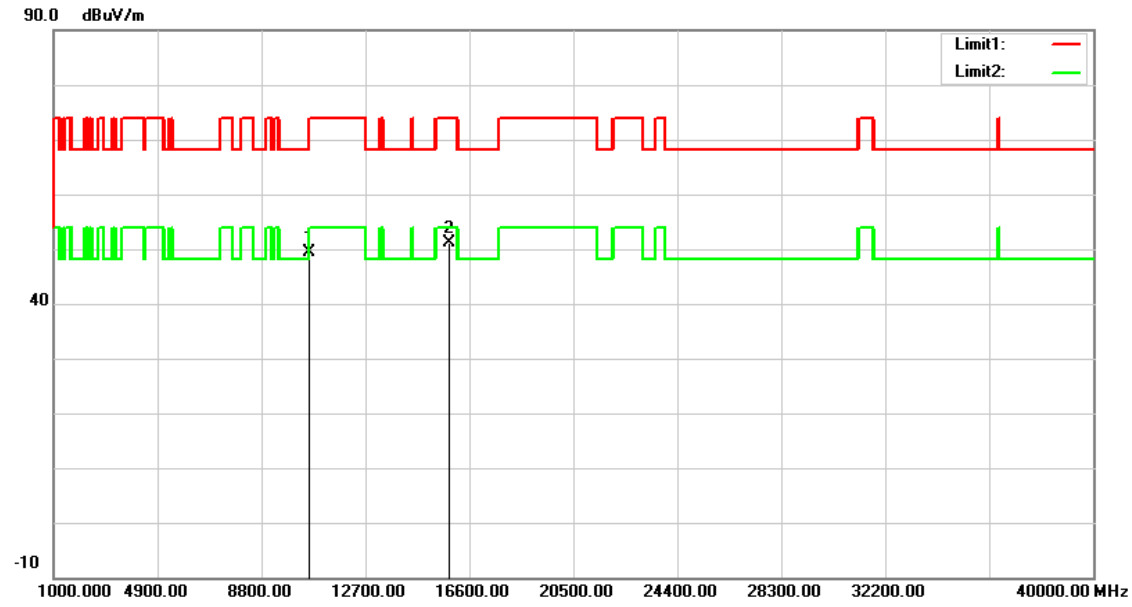


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10580.000	33.57	15.88	49.45	68.20	-18.75	peak
2	15870.000	33.35	17.77	51.12	74.00	-22.88	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5530 MHz		
Mode:	Mode 15		
Ant.Polar.:	Horizontal		

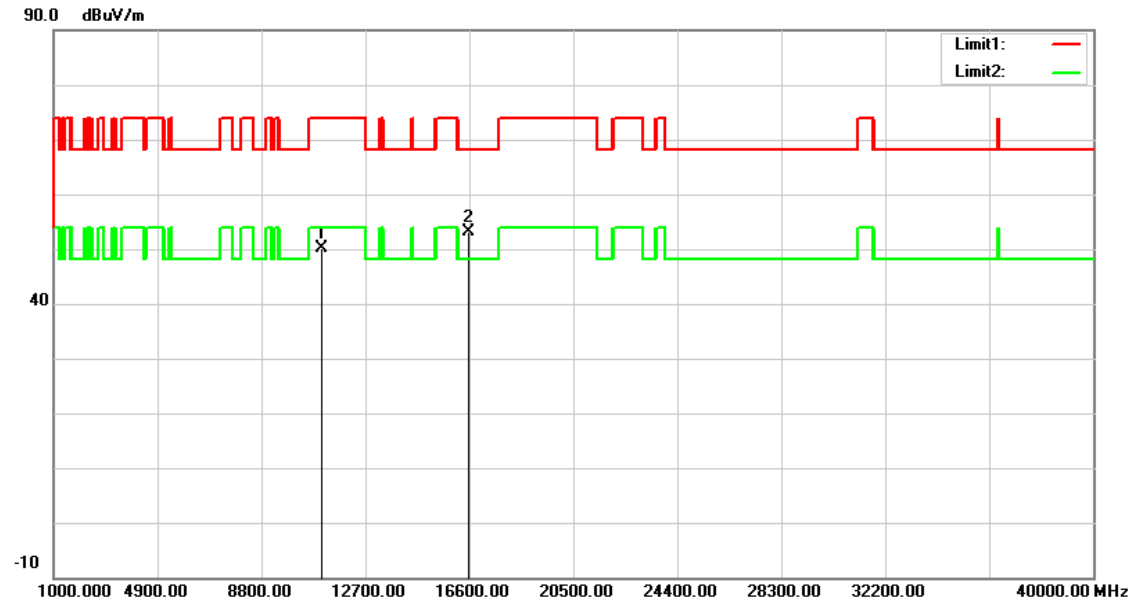


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11060.000	33.41	16.65	50.06	74.00	-23.94	peak
2	16590.000	32.86	20.31	53.17	68.20	-15.03	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5530 MHz		
Mode:	Mode 15		
Ant.Polar.:	Vertical		

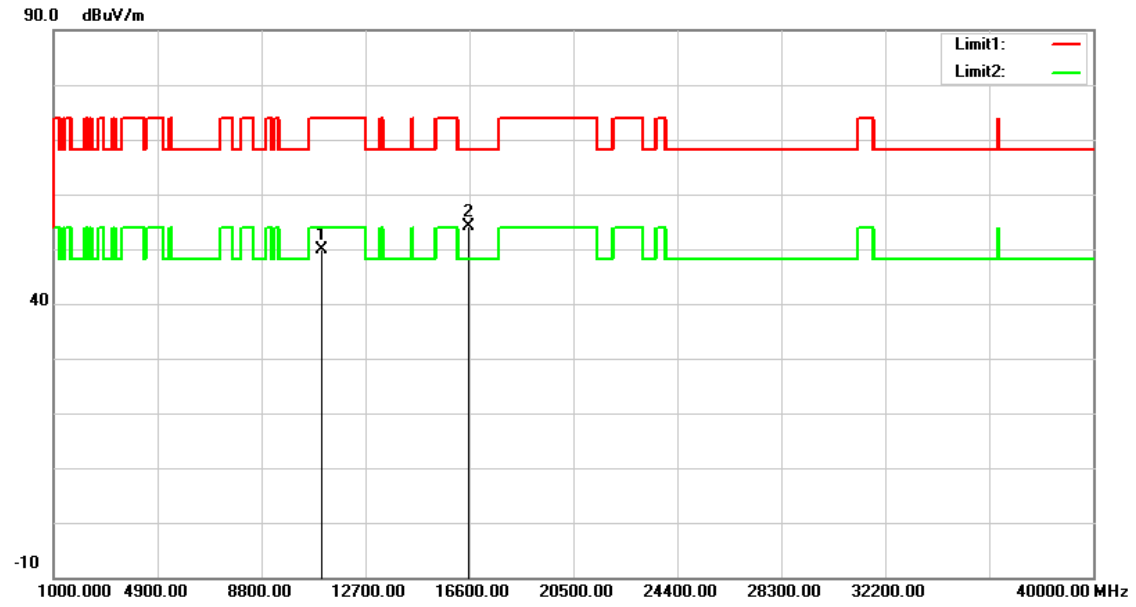


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11060.000	33.33	16.65	49.98	74.00	-24.02	peak
2	16590.000	33.91	20.31	54.22	68.20	-13.98	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5775 MHz		
Mode:	Mode 15		
Ant.Polar.:	Horizontal		

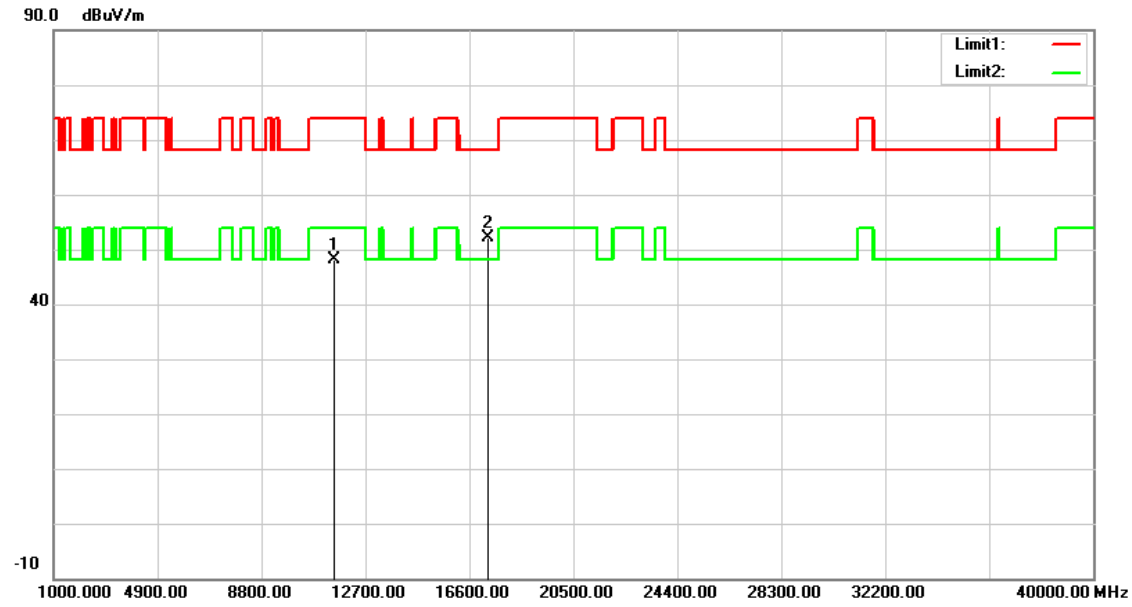


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11550.000	35.40	12.62	48.02	74.00	-25.98	peak
2	17325.000	32.95	19.12	52.07	68.20	-16.13	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5775 MHz		
Mode:	Mode 15		
Ant.Polar.:	Vertical		

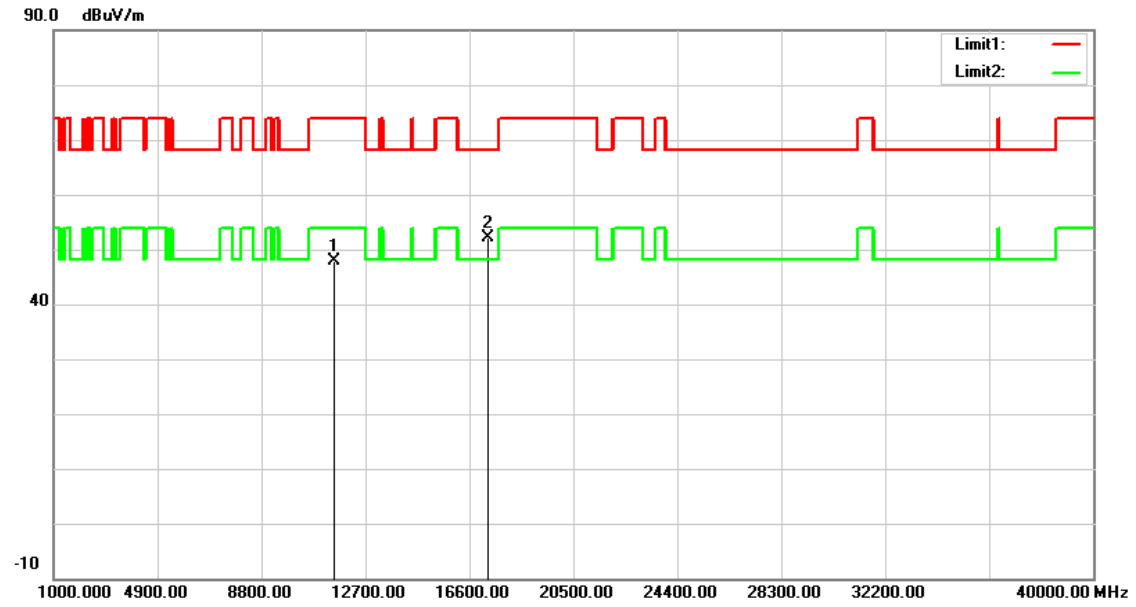


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11550.000	35.26	12.62	47.88	74.00	-26.12	peak
2	17325.000	32.94	19.12	52.06	68.20	-16.14	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5180 MHz		
Mode:	Mode 16		
Ant.Polar.:	Horizontal		

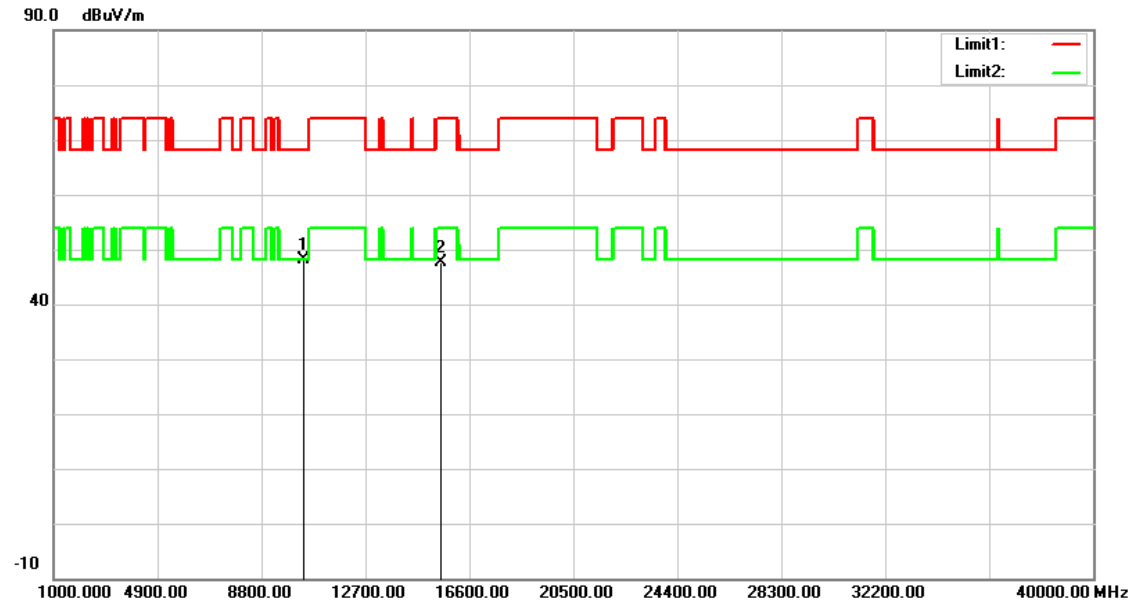


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10360.000	36.36	11.69	48.05	68.20	-20.15	peak
2	15540.000	33.18	14.52	47.70	74.00	-26.30	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5180 MHz		
Mode:	Mode 16		
Ant.Polar.:	Vertical		

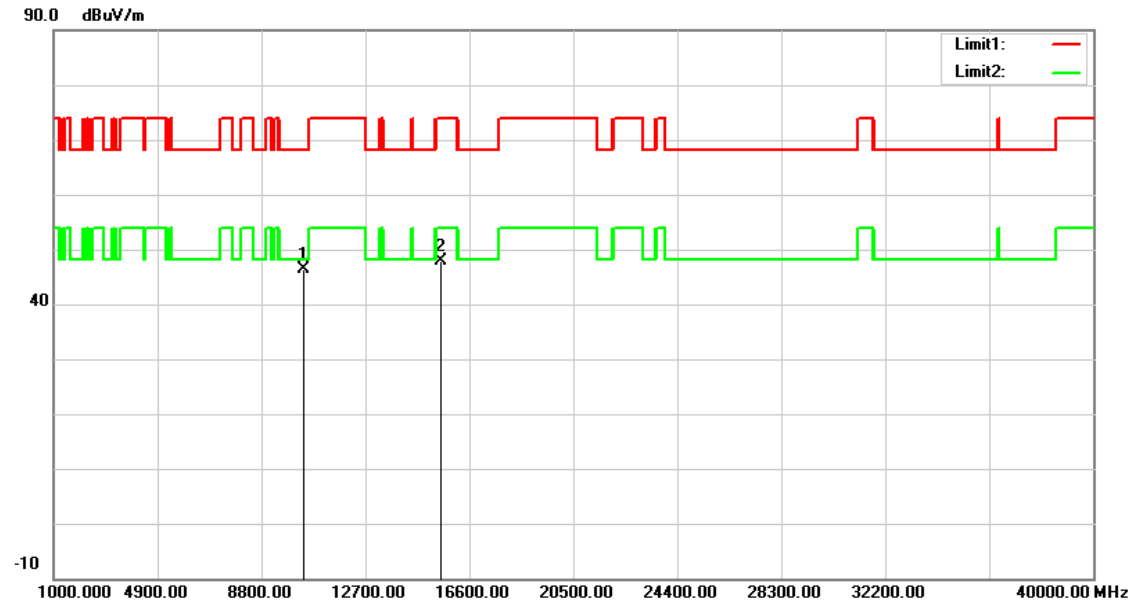


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10360.000	34.69	11.69	46.38	68.20	-21.82	peak
2	15540.000	33.45	14.52	47.97	74.00	-26.03	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5200 MHz		
Mode:	Mode 16		
Ant.Polar.:	Horizontal		

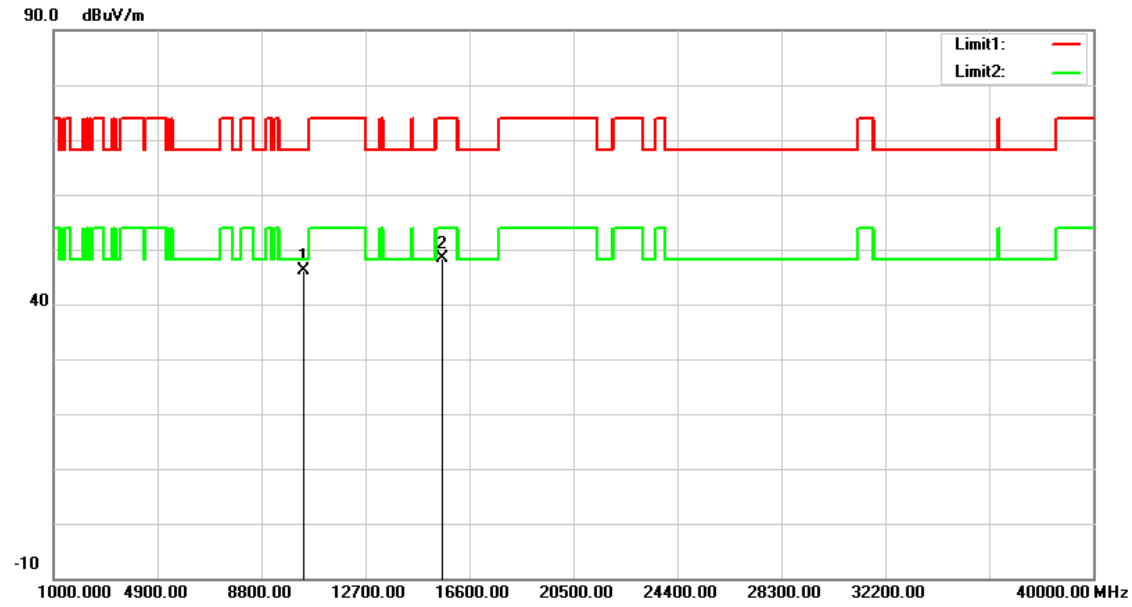


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10400.000	34.43	11.79	46.22	68.20	-21.98	peak
2	15600.000	33.97	14.39	48.36	74.00	-25.64	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5200 MHz		
Mode:	Mode 16		
Ant.Polar.:	Vertical		

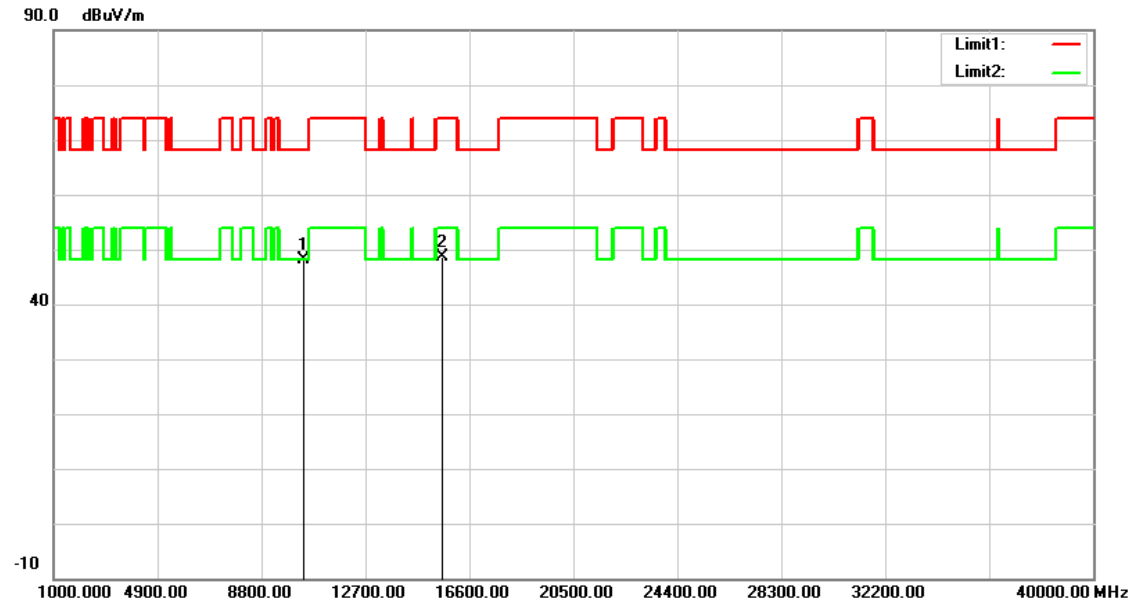


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10400.000	36.23	11.79	48.02	68.20	-20.18	peak
2	15600.000	34.34	14.39	48.73	74.00	-25.27	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5240 MHz		
Mode:	Mode 16		
Ant.Polar.:	Horizontal		

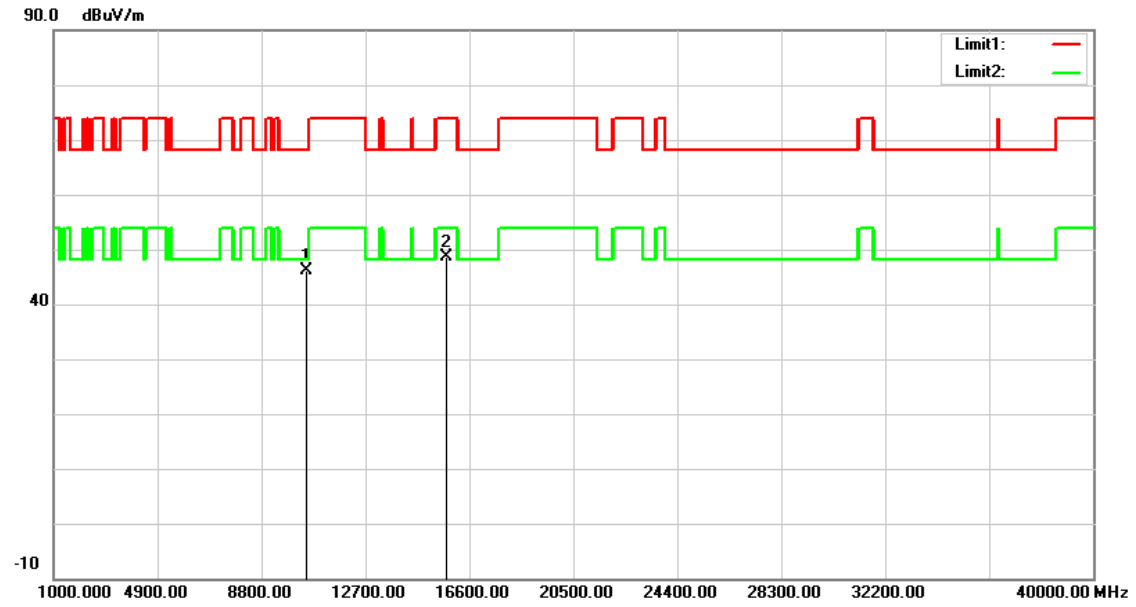


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10480.000	34.08	12.00	46.08	68.20	-22.12	peak
2	15720.000	34.60	14.13	48.73	74.00	-25.27	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5240 MHz		
Mode:	Mode 16		
Ant.Polar.:	Vertical		

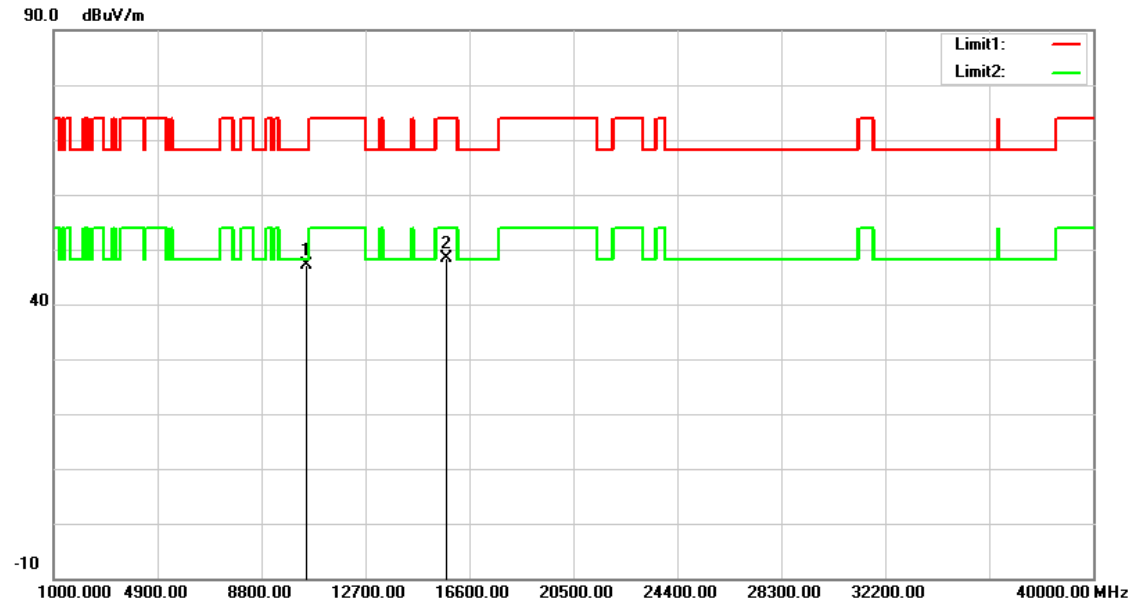


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10480.000	35.19	12.00	47.19	68.20	-21.01	peak
2	15720.000	34.29	14.13	48.42	74.00	-25.58	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5260 MHz		
Mode:	Mode 16		
Ant.Polar.:	Horizontal		

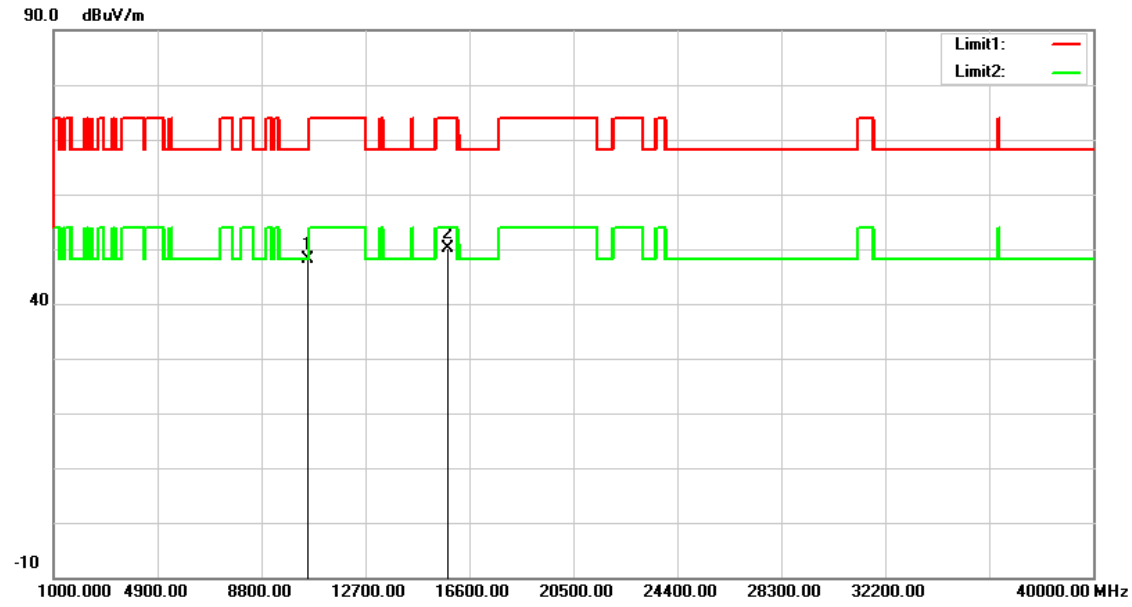


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10520.000	32.29	15.79	48.08	68.20	-20.12	peak
2	15780.000	32.30	17.92	50.22	74.00	-23.78	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5260 MHz		
Mode:	Mode 16		
Ant.Polar.:	Vertical		

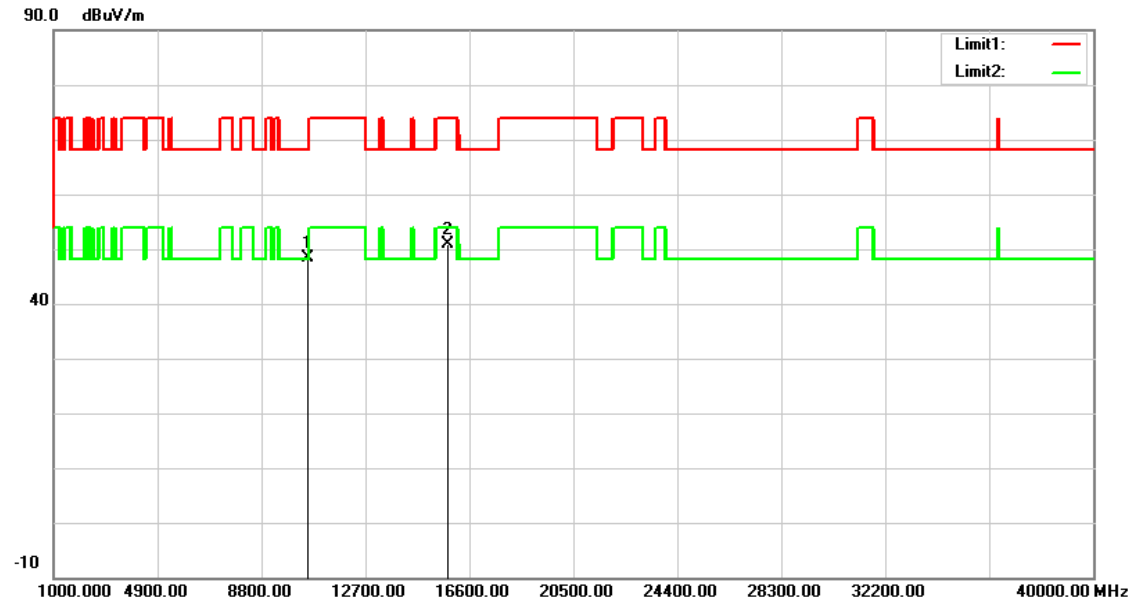


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10520.000	32.54	15.79	48.33	68.20	-19.87	peak
2	15780.000	32.99	17.92	50.91	74.00	-23.09	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5280 MHz		
Mode:	Mode 16		
Ant.Polar.:	Horizontal		

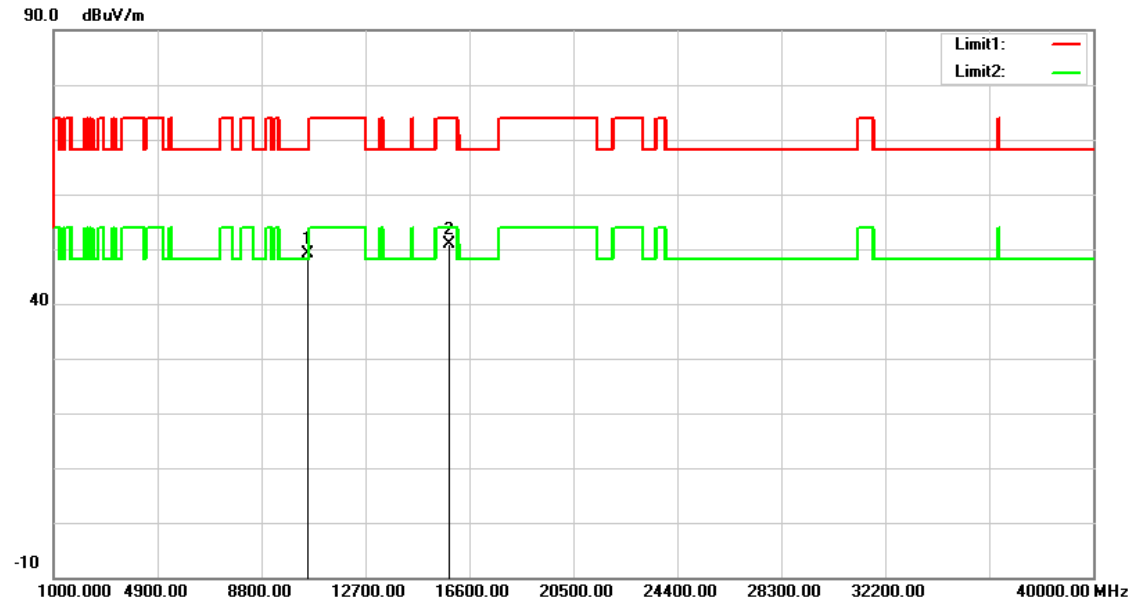


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10560.000	33.23	15.85	49.08	68.20	-19.12	peak
2	15840.000	33.17	17.82	50.99	74.00	-23.01	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5280 MHz		
Mode:	Mode 16		
Ant.Polar.:	Vertical		

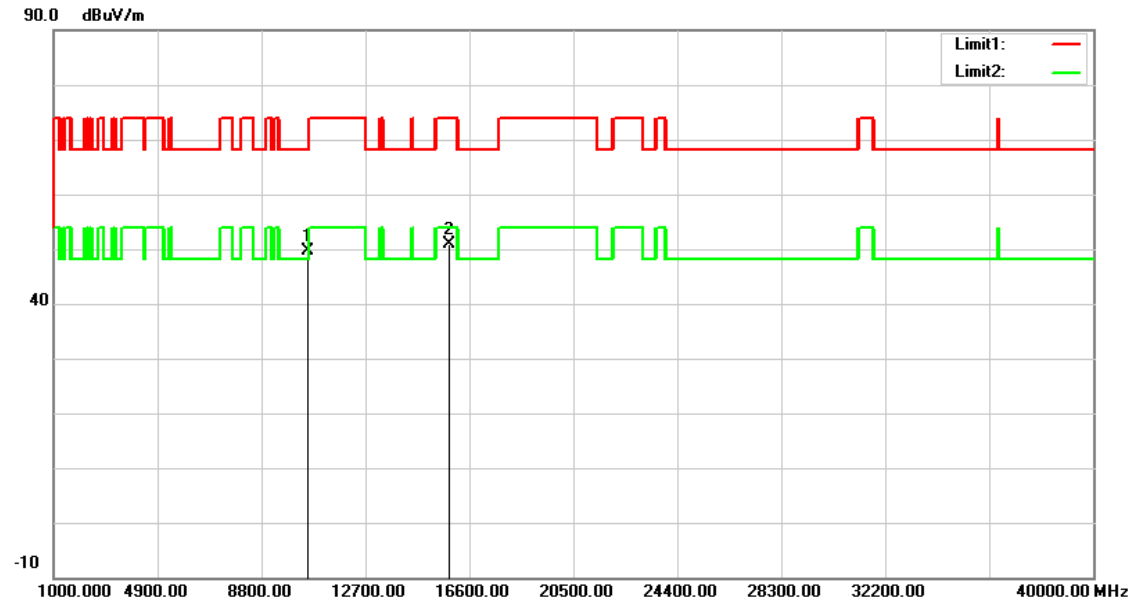


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10560.000	33.66	15.85	49.51	68.20	-18.69	peak
2	15840.000	32.95	17.82	50.77	74.00	-23.23	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5320 MHz		
Mode:	Mode 16		
Ant.Polar.:	Horizontal		

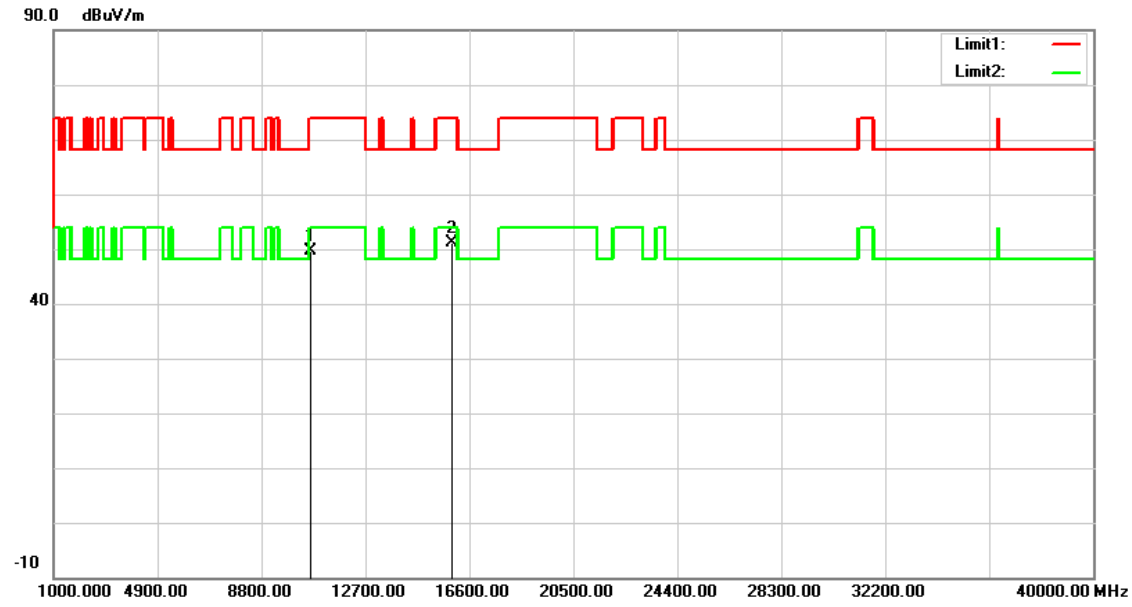


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10640.000	33.75	15.98	49.73	74.00	-24.27	peak
2	15960.000	33.43	17.62	51.05	74.00	-22.95	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5320 MHz		
Mode:	Mode 16		
Ant.Polar.:	Vertical		

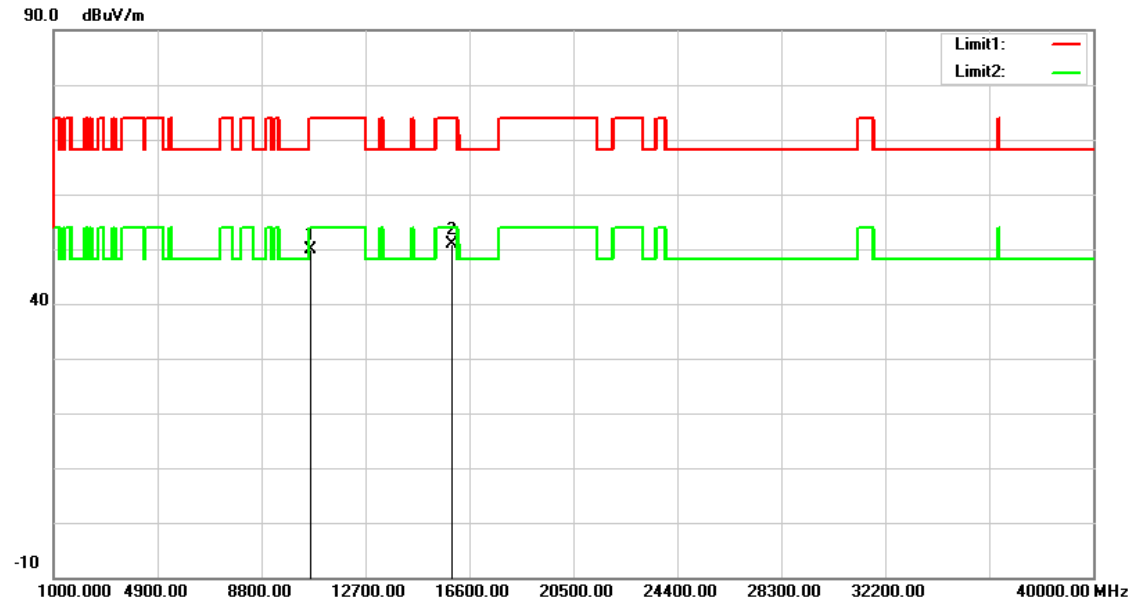


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10640.000	33.92	15.98	49.90	74.00	-24.10	peak
2	15960.000	33.35	17.62	50.97	74.00	-23.03	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5500 MHz		
Mode:	Mode 16		
Ant.Polar.:	Horizontal		

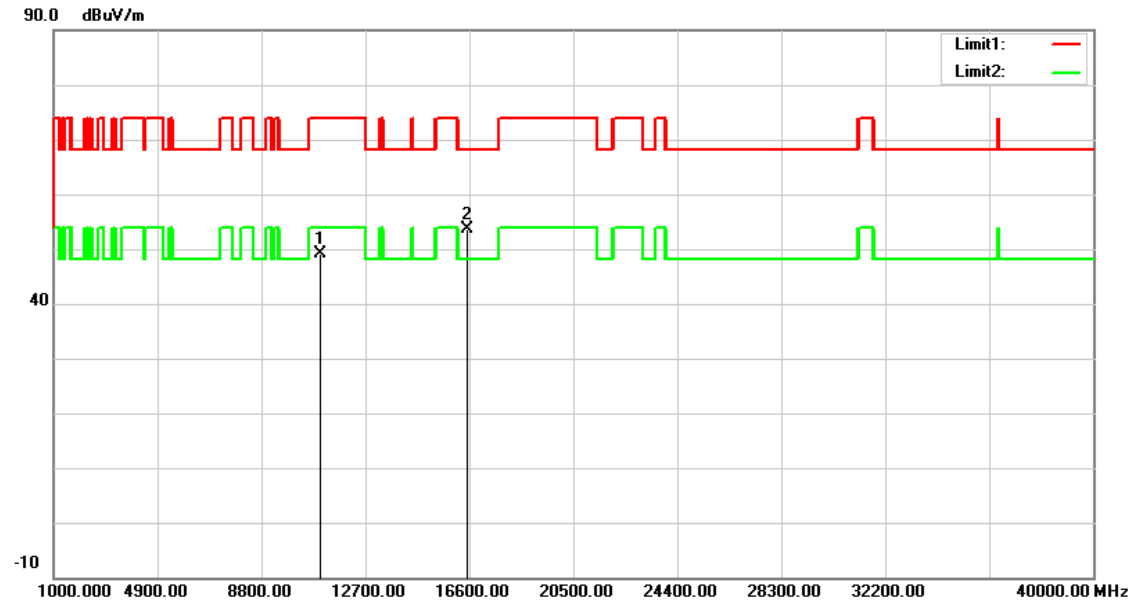


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11000.000	32.54	16.57	49.11	74.00	-24.89	peak
2	16500.000	33.85	19.85	53.70	68.20	-14.50	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5500 MHz		
Mode:	Mode 16		
Ant.Polar.:	Vertical		

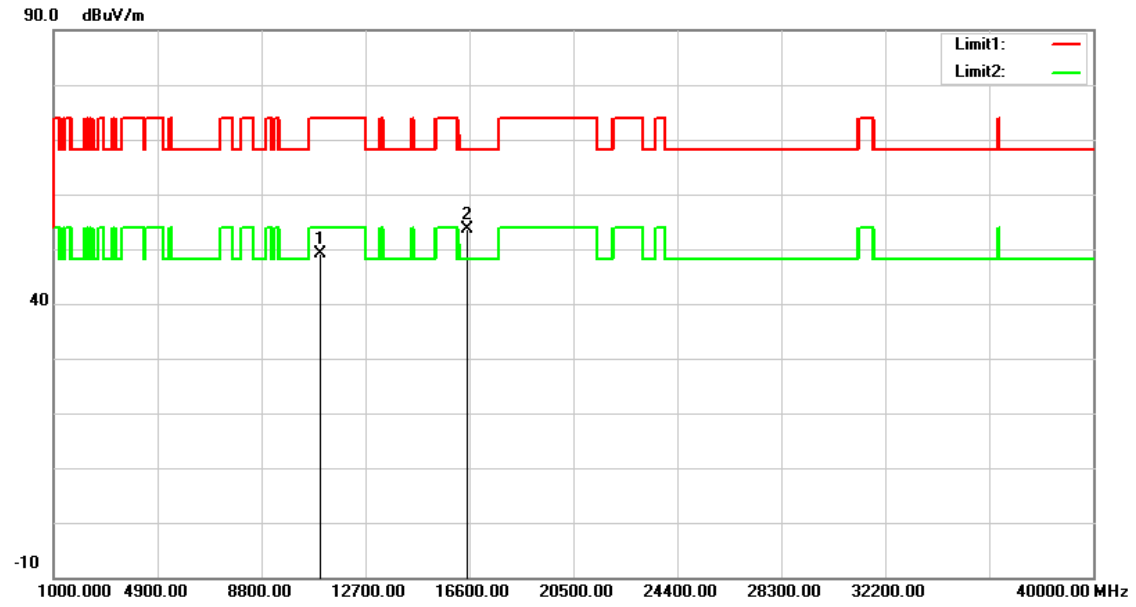


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11000.000	32.44	16.57	49.01	74.00	-24.99	peak
2	16500.000	33.77	19.85	53.62	68.20	-14.58	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5560 MHz		
Mode:	Mode 16		
Ant.Polar.:	Horizontal		

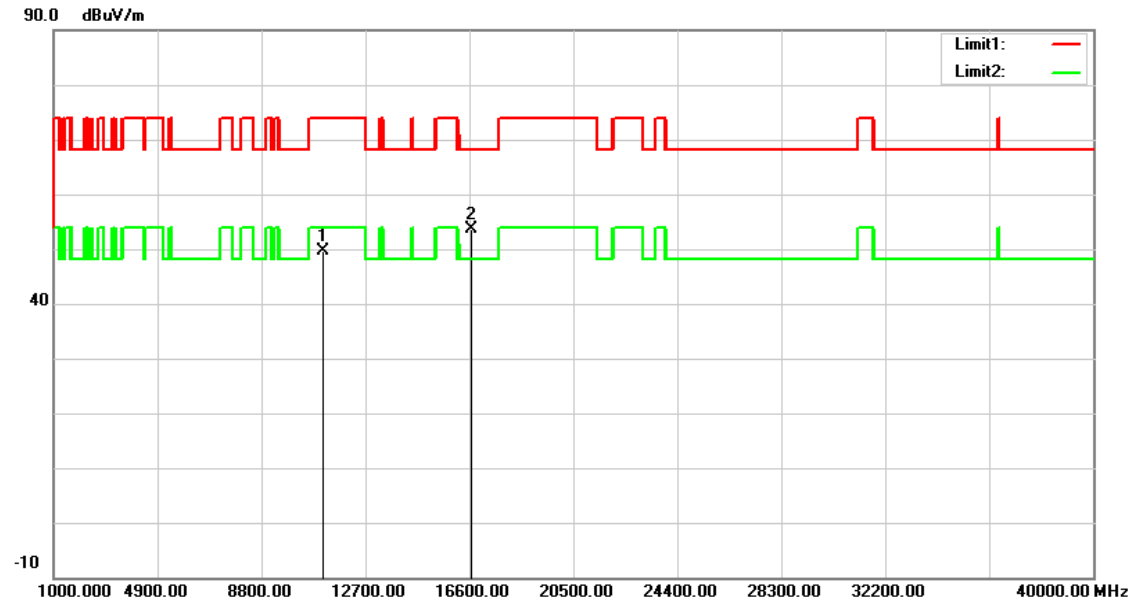


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11120.000	32.92	16.73	49.65	74.00	-24.35	peak
2	16680.000	32.83	20.77	53.60	68.20	-14.60	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5560 MHz		
Mode:	Mode 16		
Ant.Polar.:	Vertical		

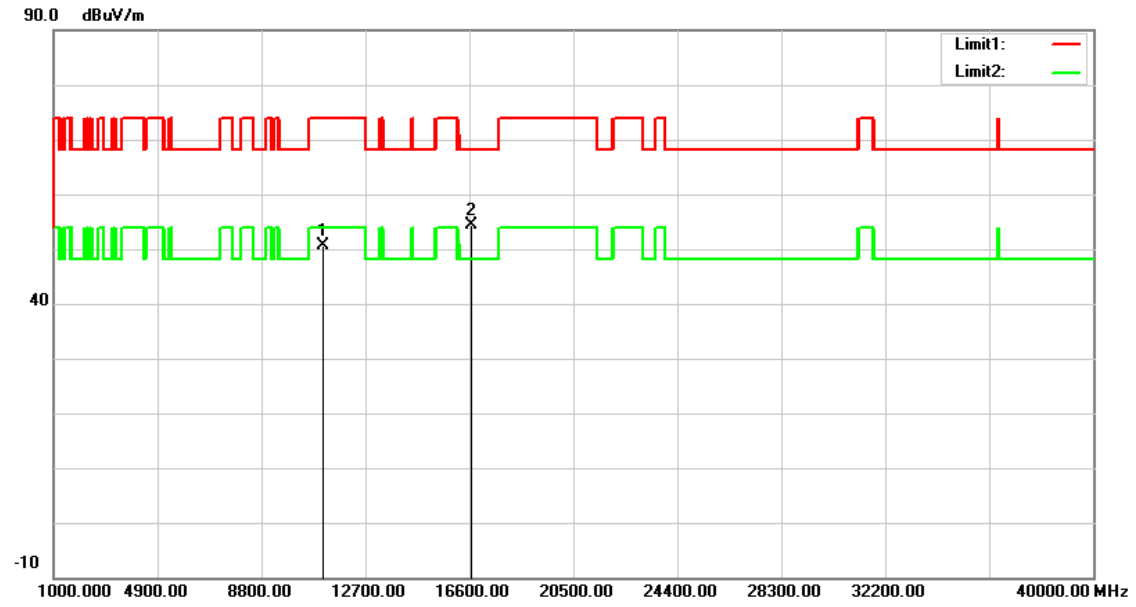


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11120.000	33.83	16.73	50.56	74.00	-23.44	peak
2	16680.000	33.61	20.77	54.38	68.20	-13.82	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5700 MHz		
Mode:	Mode 16		
Ant.Polar.:	Horizontal		

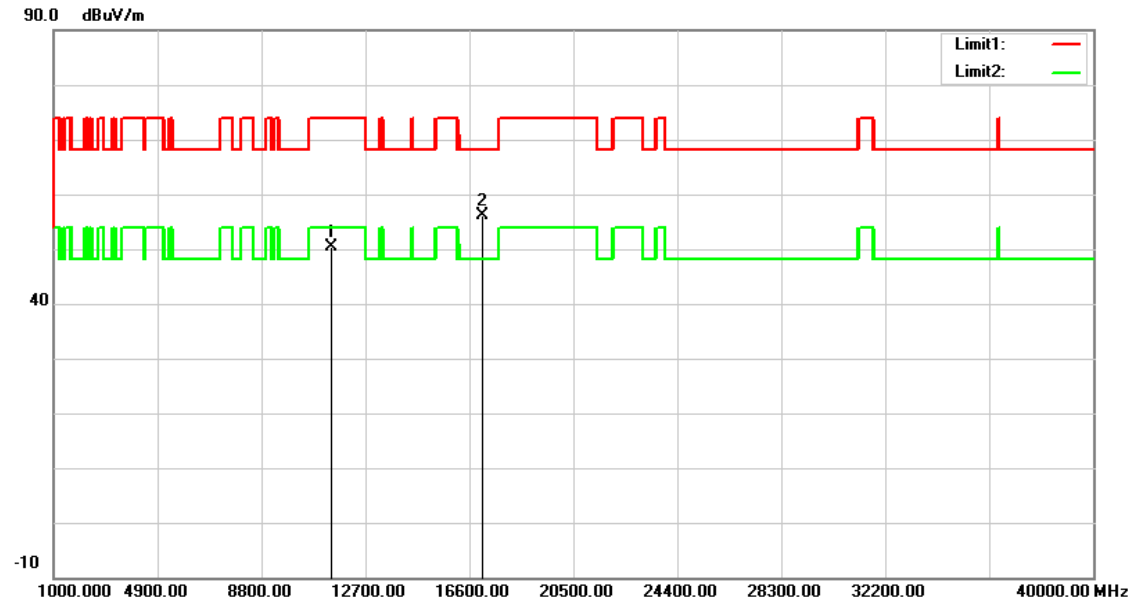


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11400.000	33.36	17.10	50.46	74.00	-23.54	peak
2	17100.000	33.31	22.78	56.09	68.20	-12.11	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5700 MHz		
Mode:	Mode 16		
Ant.Polar.:	Vertical		

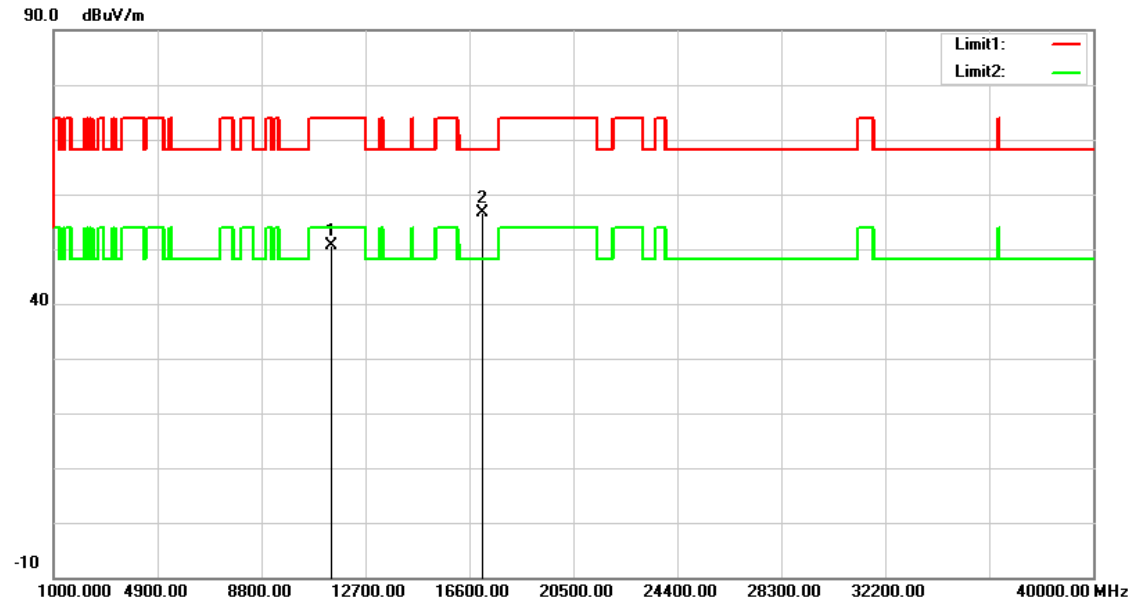


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11400.000	33.63	17.10	50.73	74.00	-23.27	peak
2	17100.000	33.77	22.78	56.55	68.20	-11.65	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5745 MHz		
Mode:	Mode 16		
Ant.Polar.:	Horizontal		

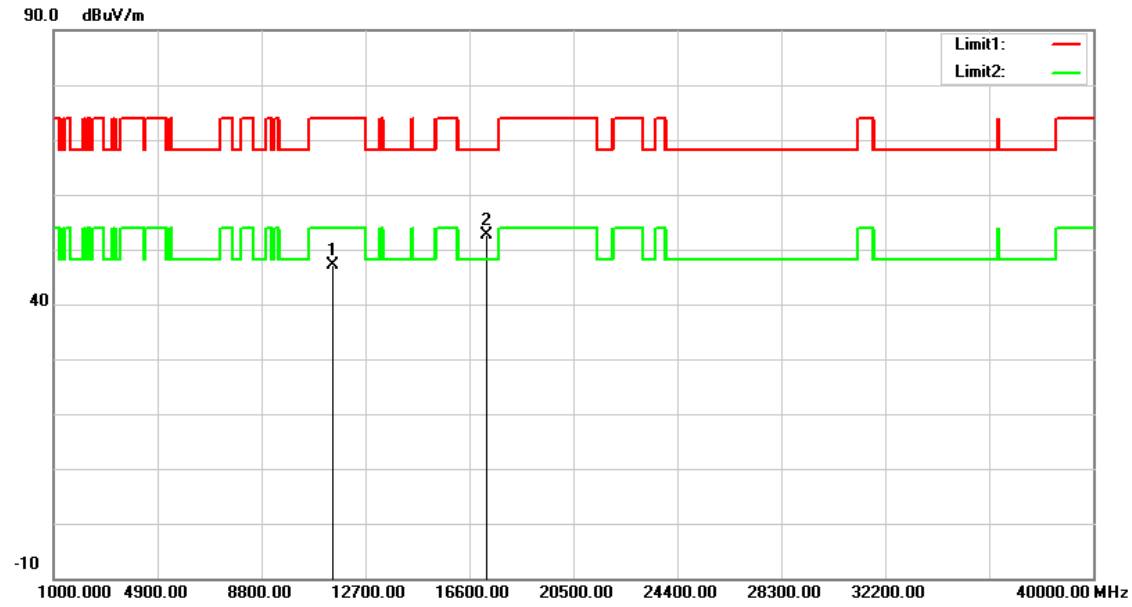


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11490.000	34.54	12.68	47.22	74.00	-26.78	peak
2	17235.000	34.01	18.52	52.53	68.20	-15.67	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5745 MHz		
Mode:	Mode 16		
Ant.Polar.:	Vertical		

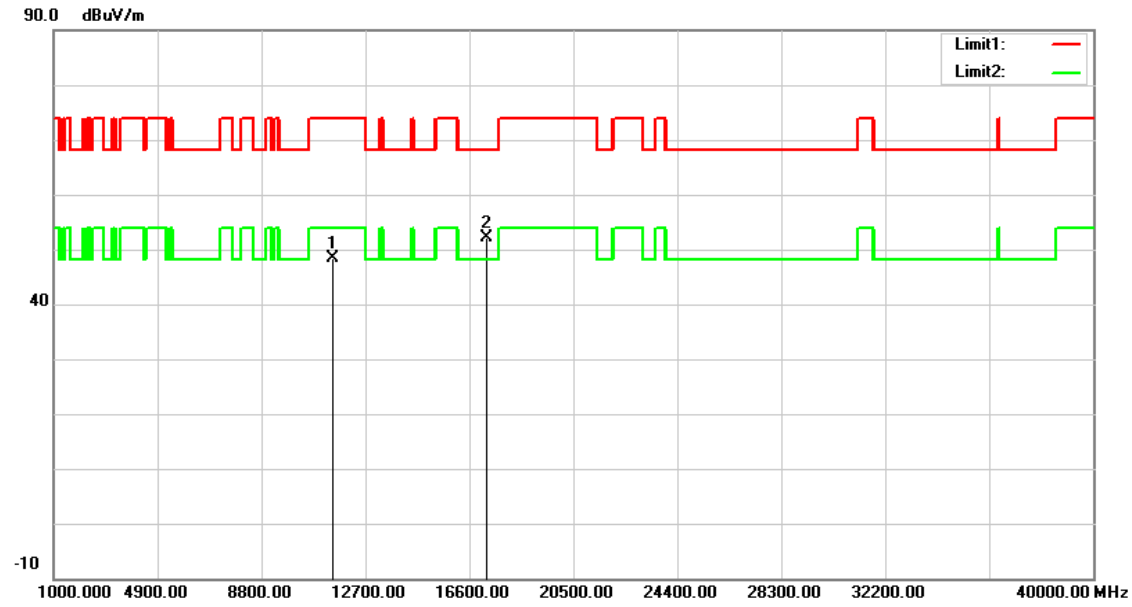


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11490.000	35.71	12.68	48.39	74.00	-25.61	peak
2	17235.000	33.53	18.52	52.05	68.20	-16.15	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5785 MHz		
Mode:	Mode 16		
Ant.Polar.:	Horizontal		

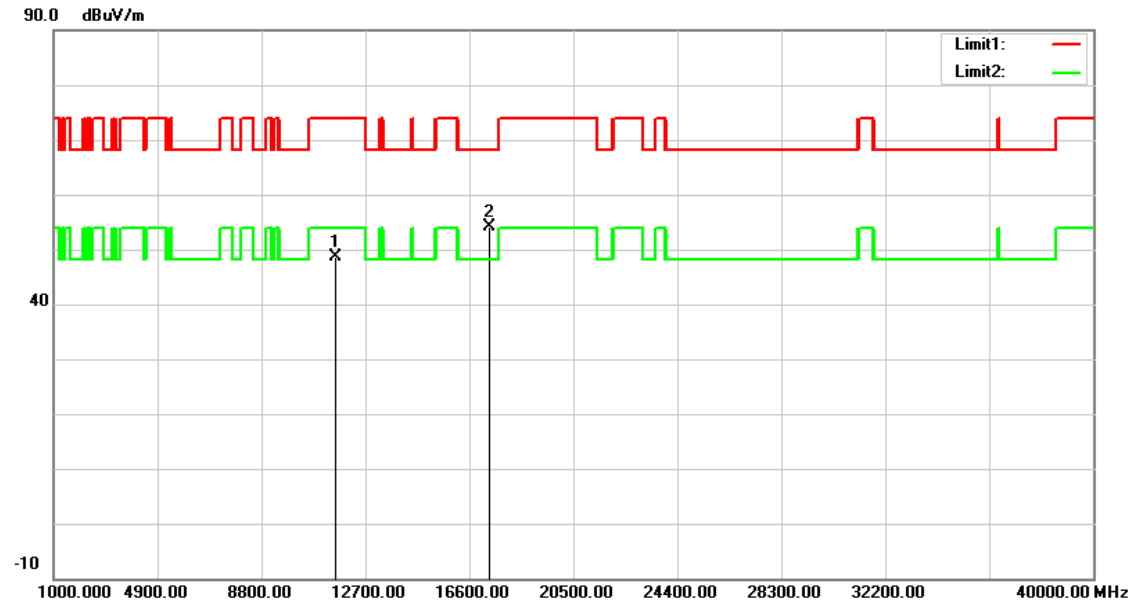


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11570.000	35.98	12.59	48.57	74.00	-25.43	peak
2	17355.000	34.75	19.32	54.07	68.20	-14.13	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5785 MHz		
Mode:	Mode 16		
Ant.Polar.:	Vertical		

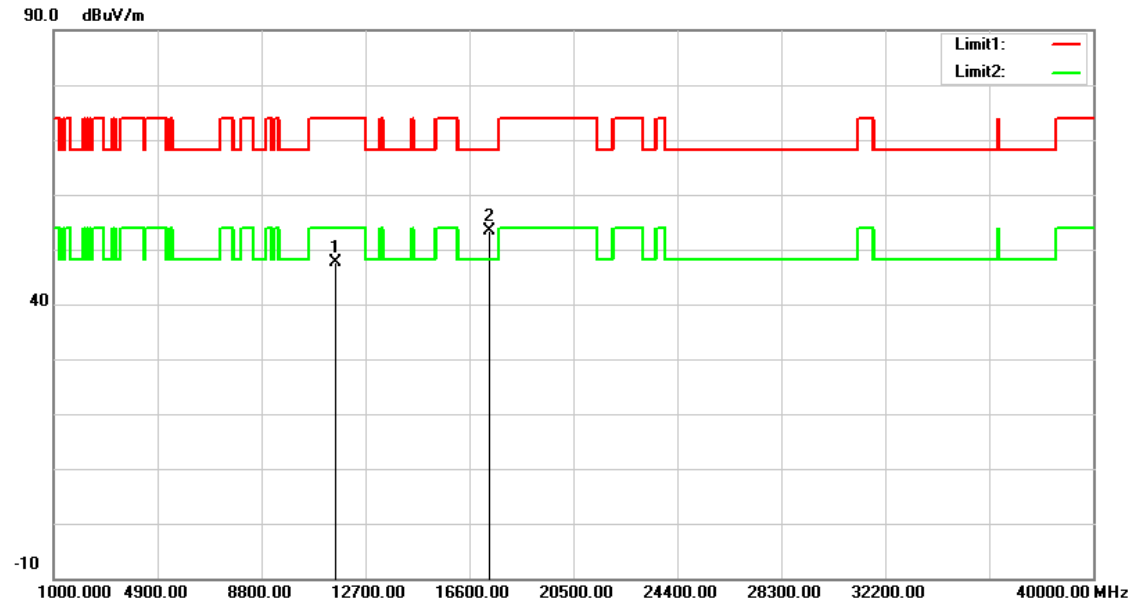


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11570.000	35.08	12.59	47.67	74.00	-26.33	peak
2	17355.000	33.97	19.32	53.29	68.20	-14.91	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5825 MHz		
Mode:	Mode 16		
Ant.Polar.:	Horizontal		

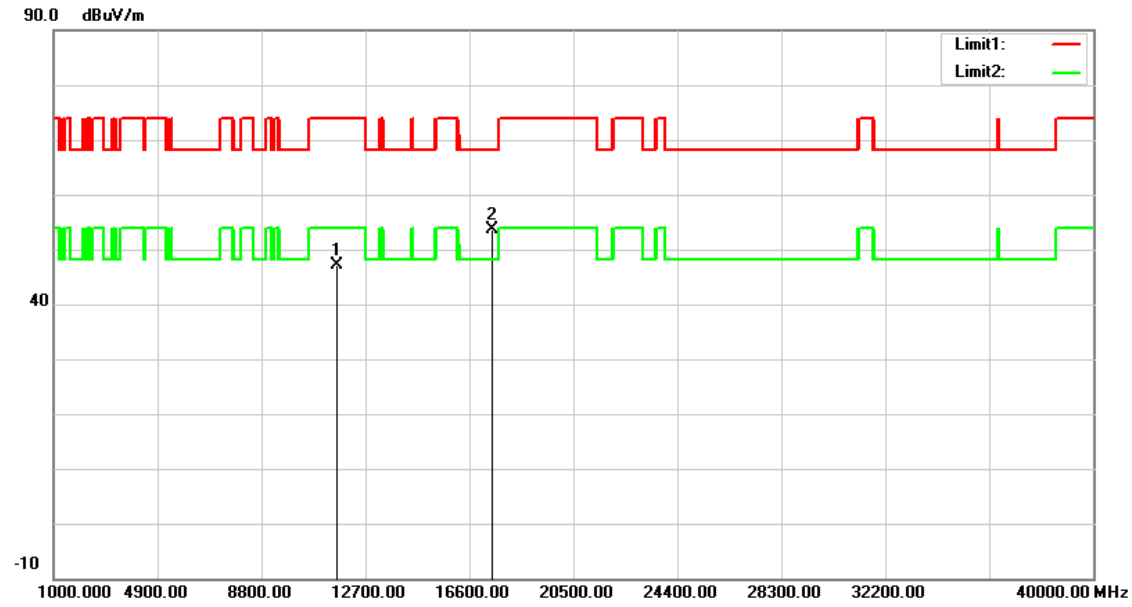


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11650.000	34.56	12.48	47.04	74.00	-26.96	peak
2	17475.000	33.48	20.13	53.61	68.20	-14.59	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5825 MHz		
Mode:	Mode 16		
Ant.Polar.:	Vertical		

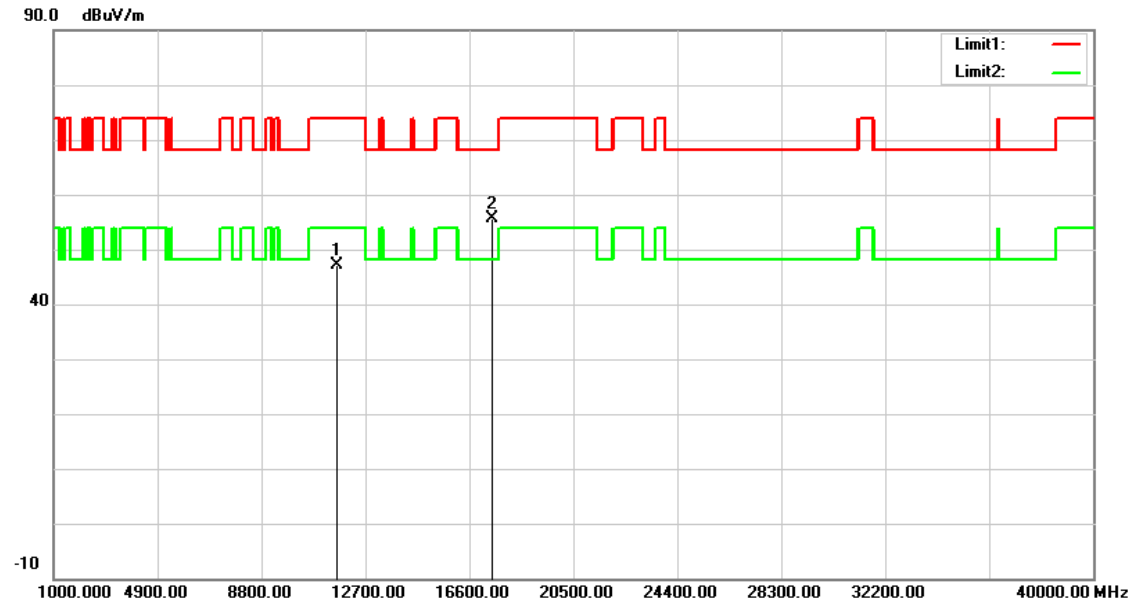


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11650.000	34.63	12.48	47.11	74.00	-26.89	peak
2	17475.000	35.41	20.13	55.54	68.20	-12.66	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5190 MHz		
Mode:	Mode 17		
Ant.Polar.:	Horizontal		

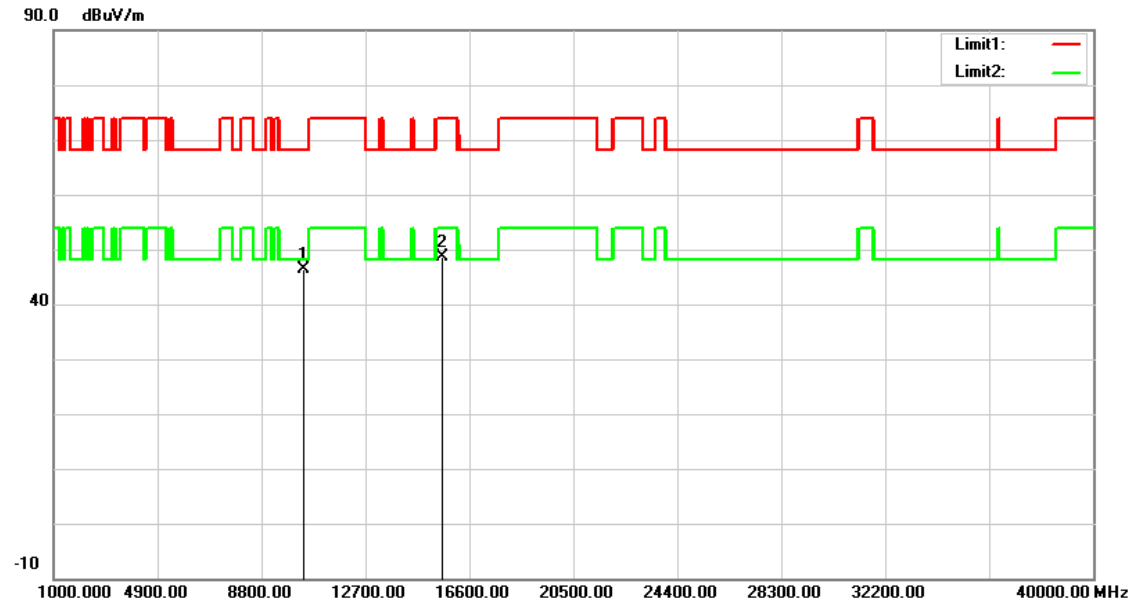


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10380.000	34.68	11.75	46.43	68.20	-21.77	peak
2	15570.000	34.17	14.45	48.62	74.00	-25.38	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5190 MHz		
Mode:	Mode 17		
Ant.Polar.:	Vertical		

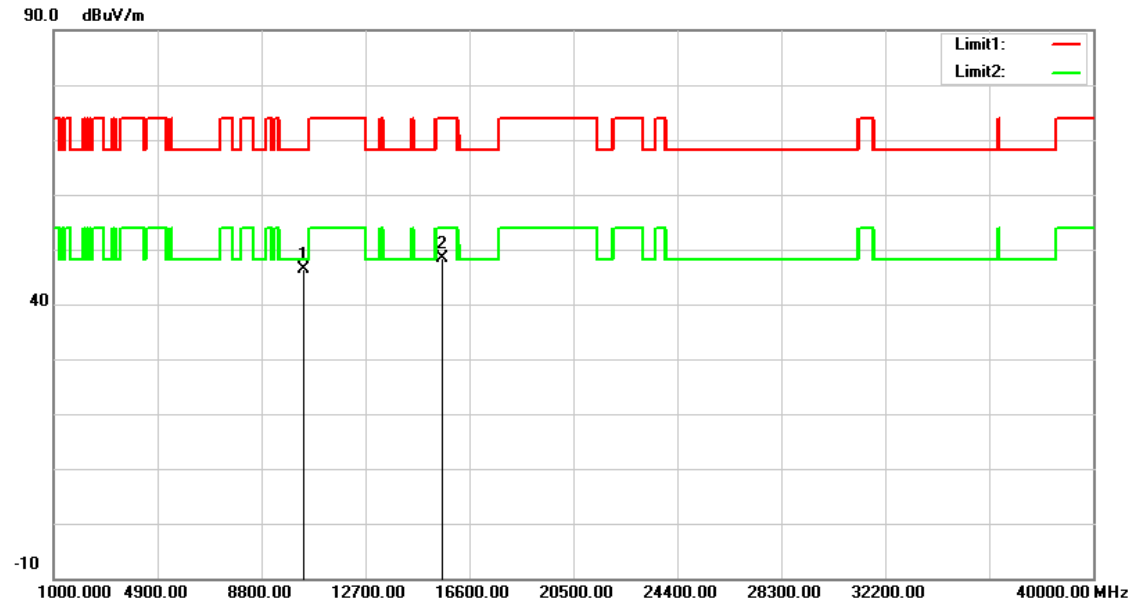


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10380.000	34.60	11.75	46.35	68.20	-21.85	peak
2	15570.000	33.88	14.45	48.33	74.00	-25.67	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5230 MHz		
Mode:	Mode 17		
Ant.Polar.:	Horizontal		

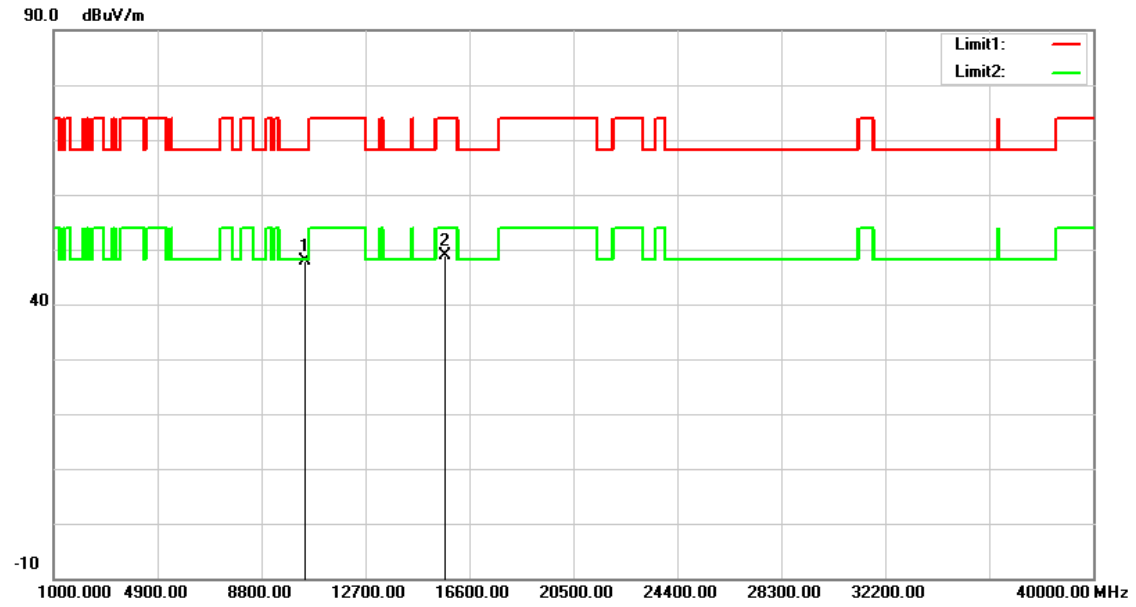


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10460.000	35.87	11.95	47.82	68.20	-20.38	peak
2	15690.000	34.57	14.19	48.76	74.00	-25.24	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5230 MHz		
Mode:	Mode 17		
Ant.Polar.:	Vertical		

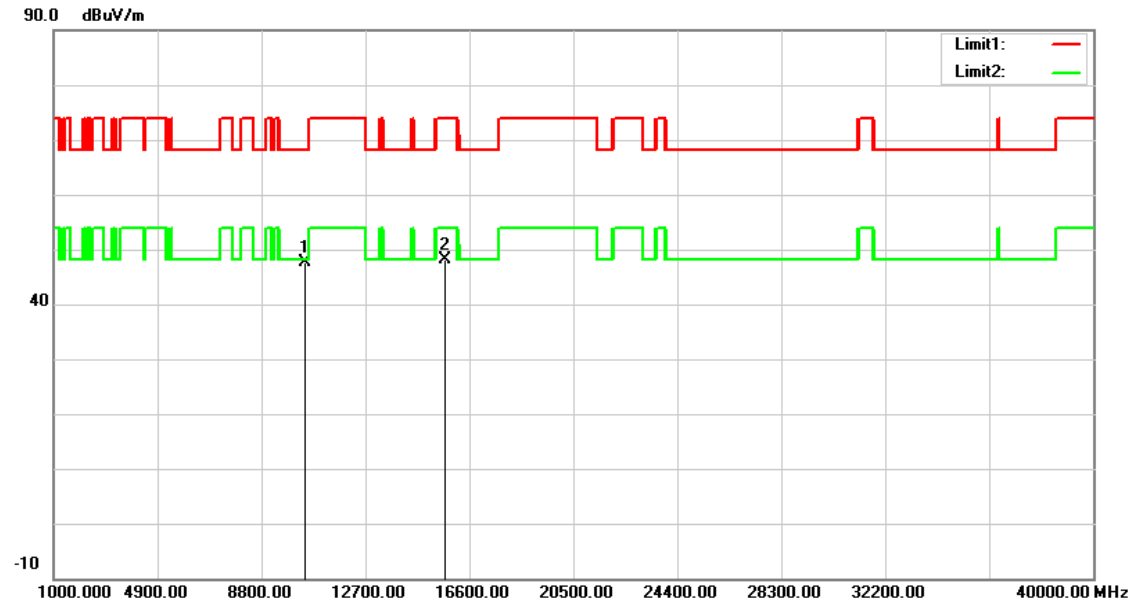


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10460.000	35.76	11.95	47.71	68.20	-20.49	peak
2	15690.000	34.01	14.19	48.20	74.00	-25.80	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5270 MHz		
Mode:	Mode 17		
Ant.Polar.:	Horizontal		

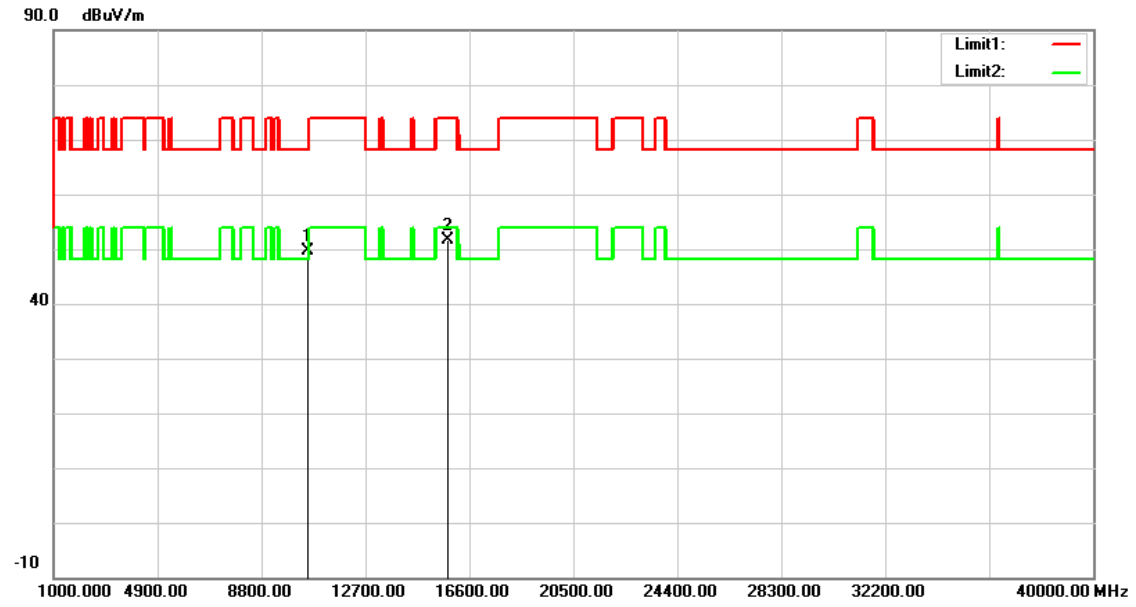


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10540.000	33.80	15.82	49.62	68.20	-18.58	peak
2	15810.000	33.69	17.87	51.56	74.00	-22.44	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5270 MHz		
Mode:	Mode 17		
Ant.Polar.:	Vertical		

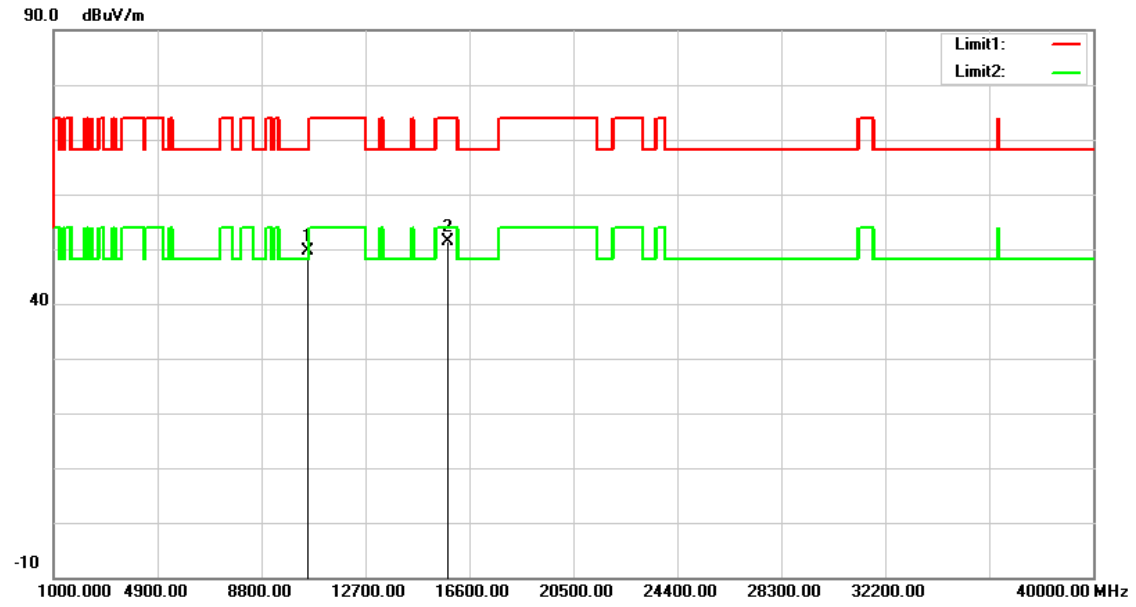


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10540.000	33.79	15.82	49.61	68.20	-18.59	peak
2	15810.000	33.49	17.87	51.36	74.00	-22.64	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5310 MHz		
Mode:	Mode 17		
Ant.Polar.:	Horizontal		

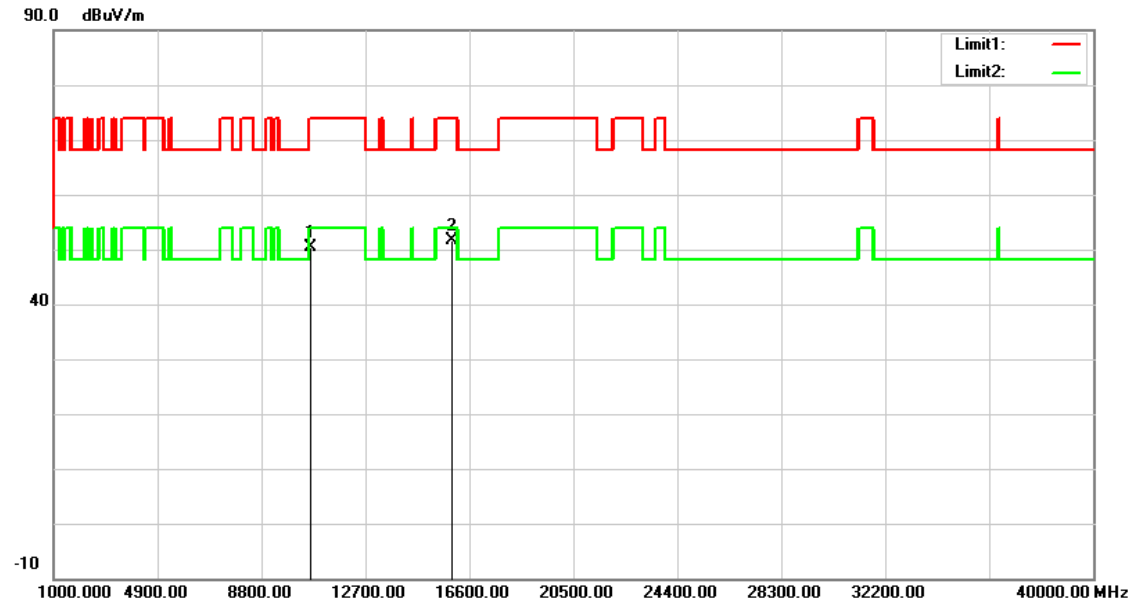


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10620.000	34.44	15.95	50.39	74.00	-23.61	peak
2	15930.000	33.85	17.67	51.52	74.00	-22.48	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5310 MHz		
Mode:	Mode 17		
Ant.Polar.:	Vertical		

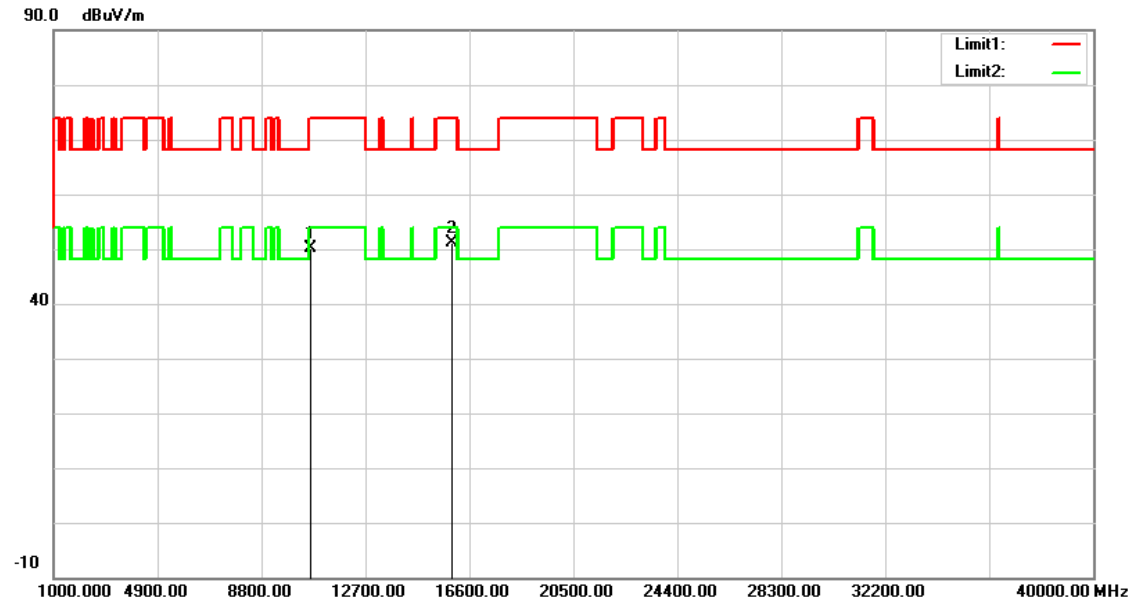


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10620.000	34.06	15.95	50.01	74.00	-23.99	peak
2	15930.000	33.41	17.67	51.08	74.00	-22.92	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5510 MHz		
Mode:	Mode 17		
Ant.Polar.:	Horizontal		

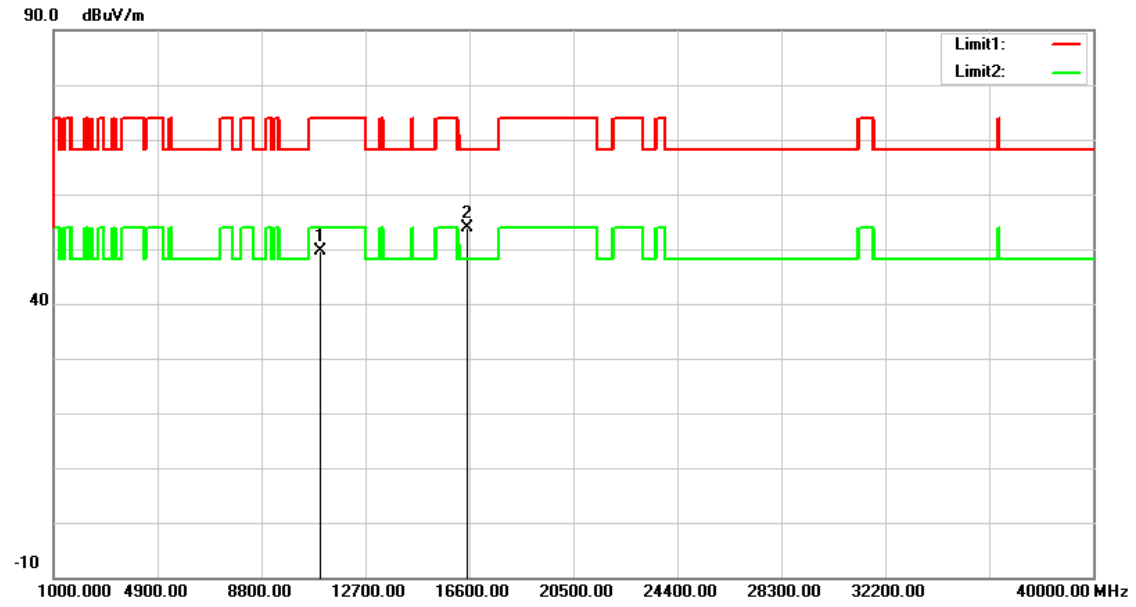


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11020.000	33.03	16.60	49.63	74.00	-24.37	peak
2	16530.000	33.91	20.00	53.91	68.20	-14.29	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5510 MHz		
Mode:	Mode 17		
Ant.Polar.:	Vertical		

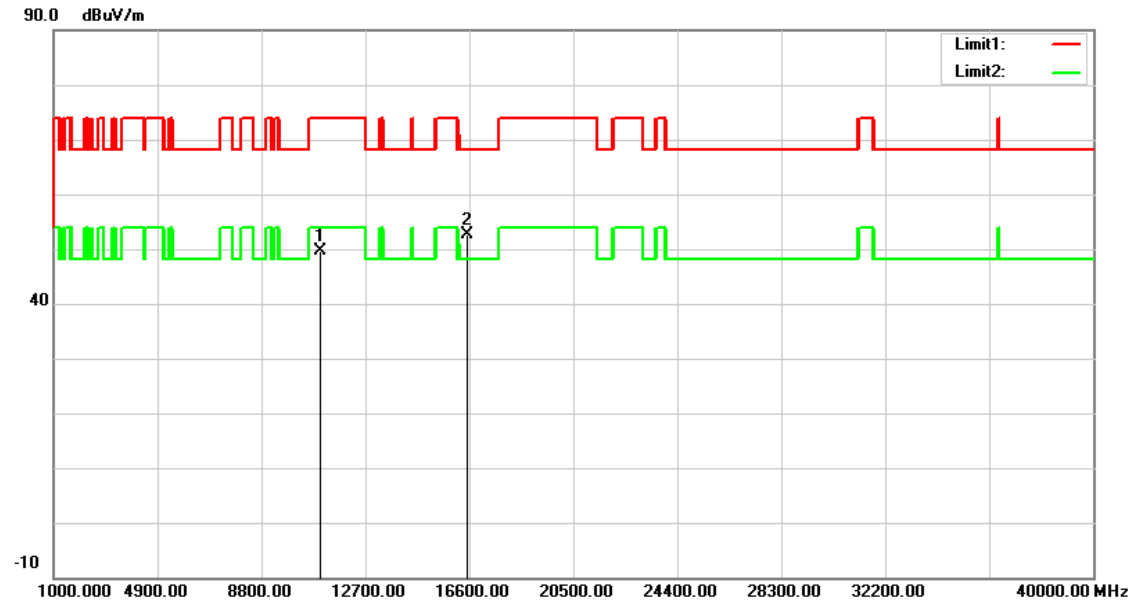


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11020.000	33.11	16.60	49.71	74.00	-24.29	peak
2	16530.000	32.59	20.00	52.59	68.20	-15.61	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5550 MHz		
Mode:	Mode 17		
Ant.Polar.:	Horizontal		

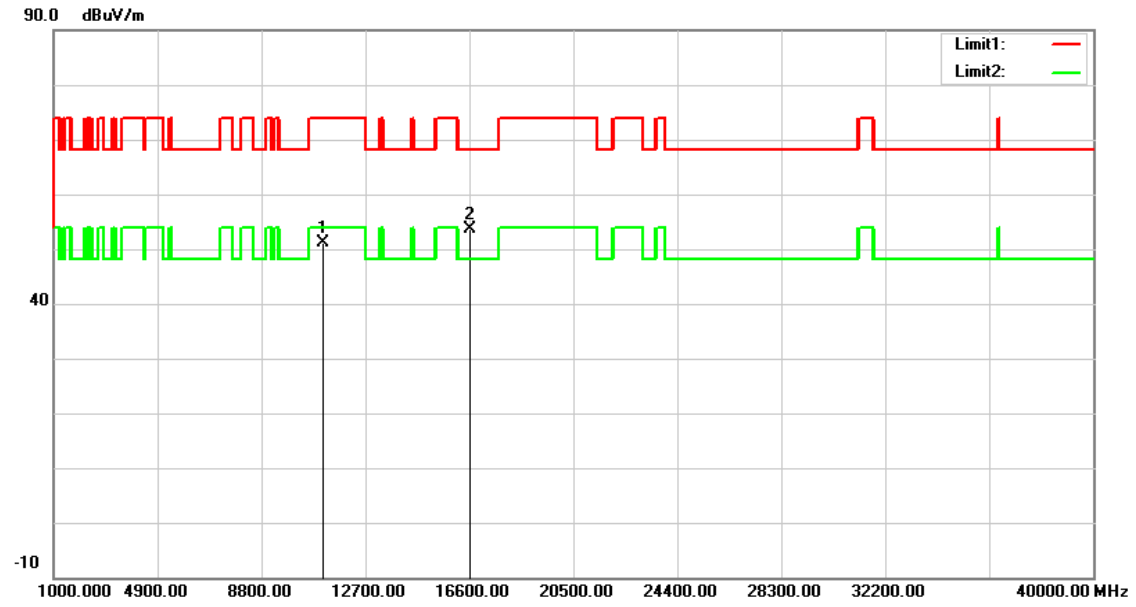


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11100.000	34.37	16.71	51.08	74.00	-22.92	peak
2	16650.000	32.94	20.62	53.56	68.20	-14.64	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5550 MHz		
Mode:	Mode 17		
Ant.Polar.:	Vertical		

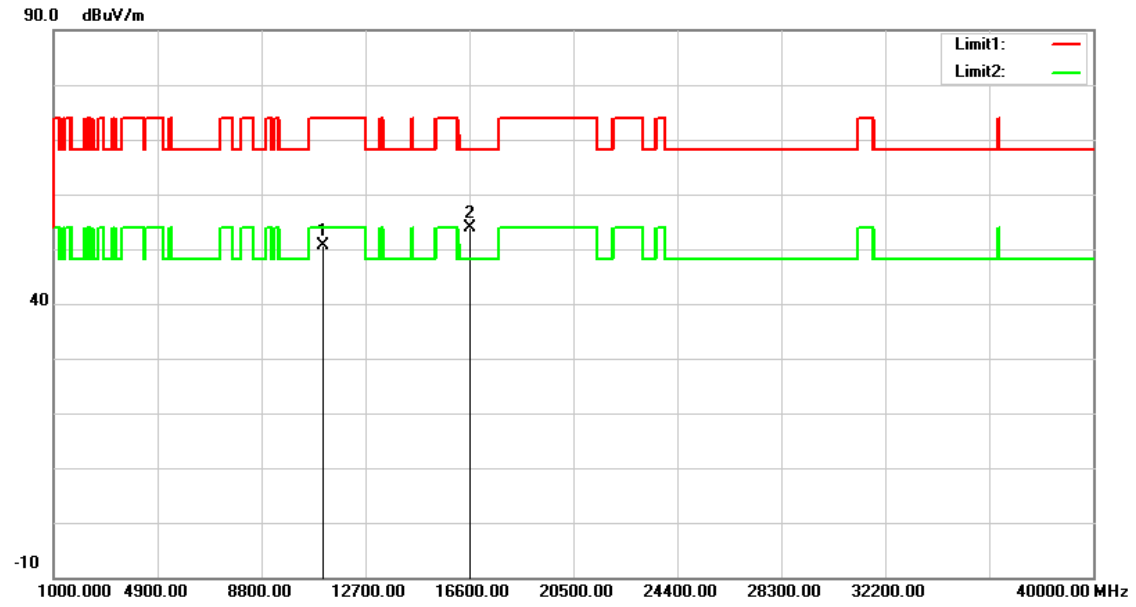


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11100.000	33.95	16.71	50.66	74.00	-23.34	peak
2	16650.000	33.24	20.62	53.86	68.20	-14.34	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5670 MHz		
Mode:	Mode 17		
Ant.Polar.:	Horizontal		

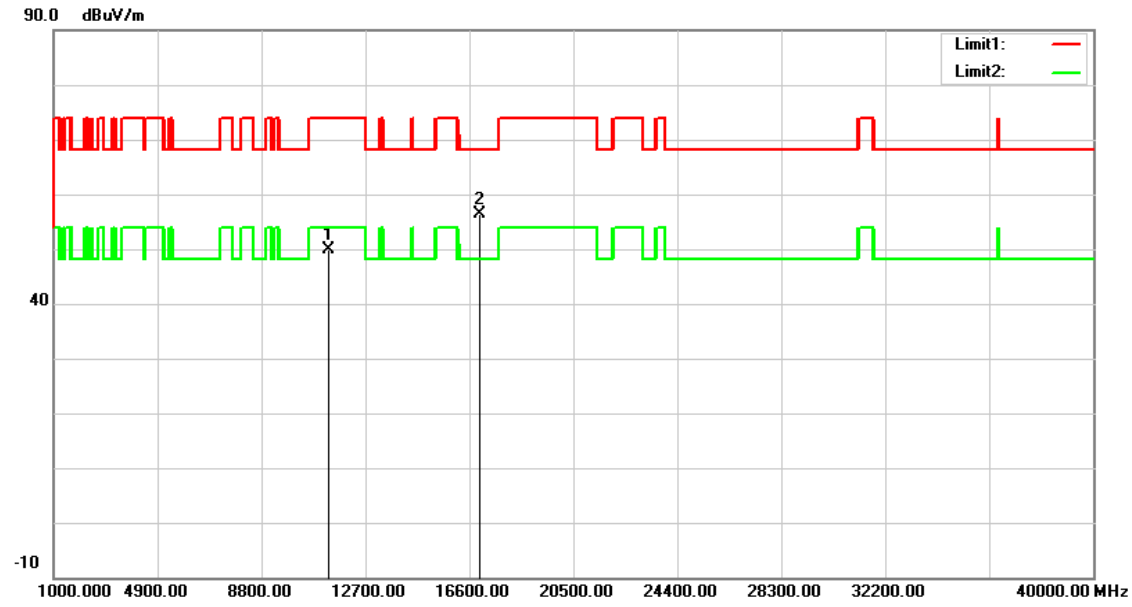


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11340.000	32.93	17.03	49.96	74.00	-24.04	peak
2	17010.000	33.98	22.46	56.44	68.20	-11.76	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5670 MHz		
Mode:	Mode 17		
Ant.Polar.:	Vertical		

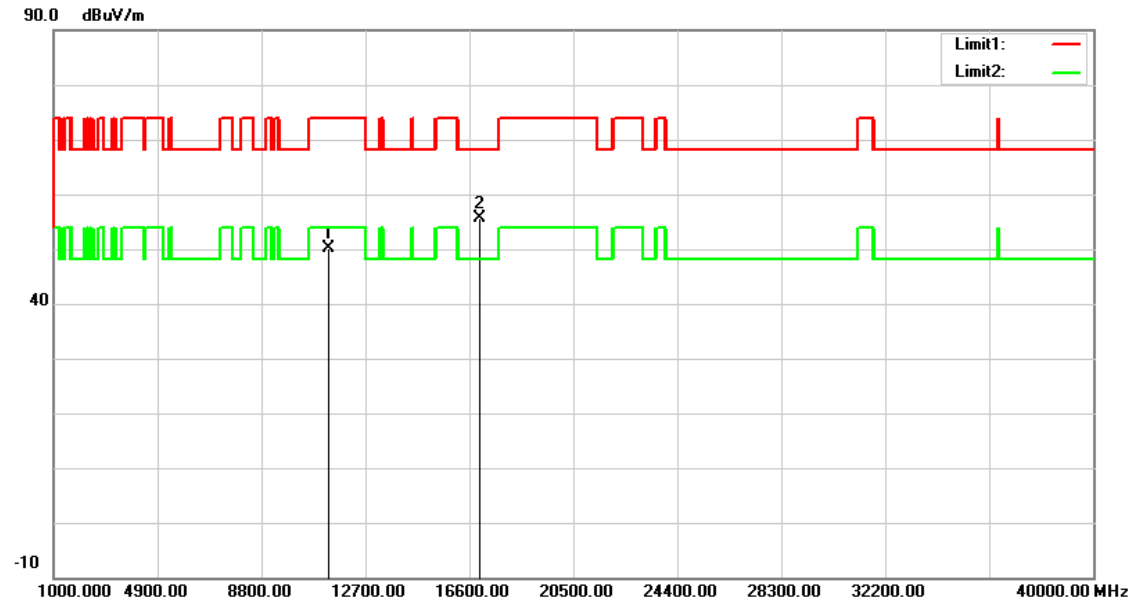


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11340.000	33.16	17.03	50.19	74.00	-23.81	peak
2	17010.000	33.23	22.46	55.69	68.20	-12.51	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5755 MHz		
Mode:	Mode 17		
Ant.Polar.:	Horizontal		

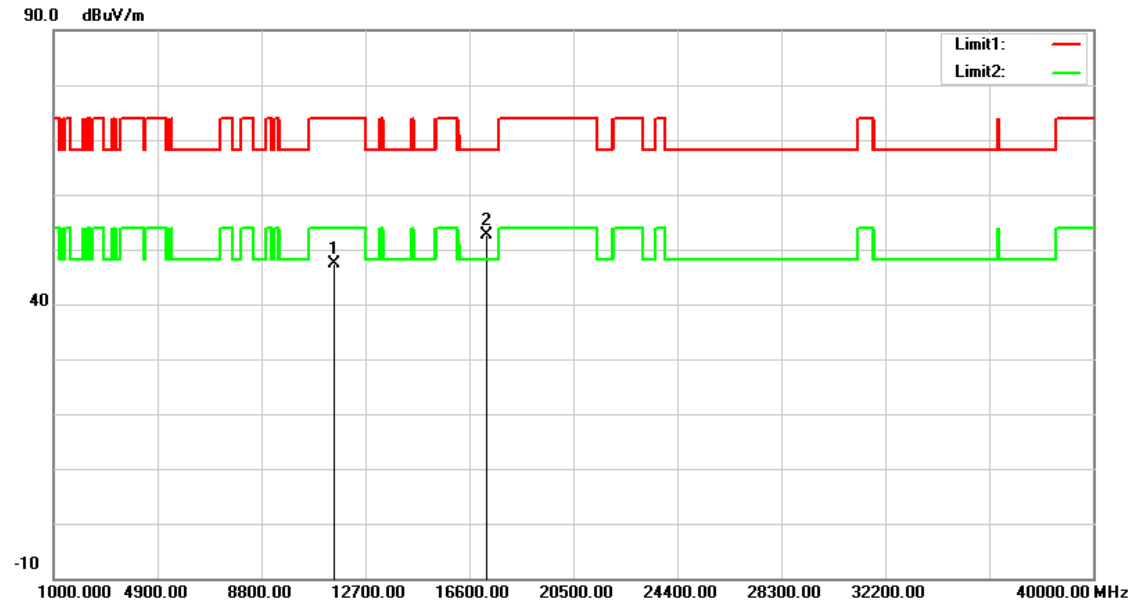


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11510.000	34.70	12.68	47.38	74.00	-26.62	peak
2	17265.000	33.96	18.72	52.68	68.20	-15.52	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5755 MHz		
Mode:	Mode 17		
Ant.Polar.:	Vertical		

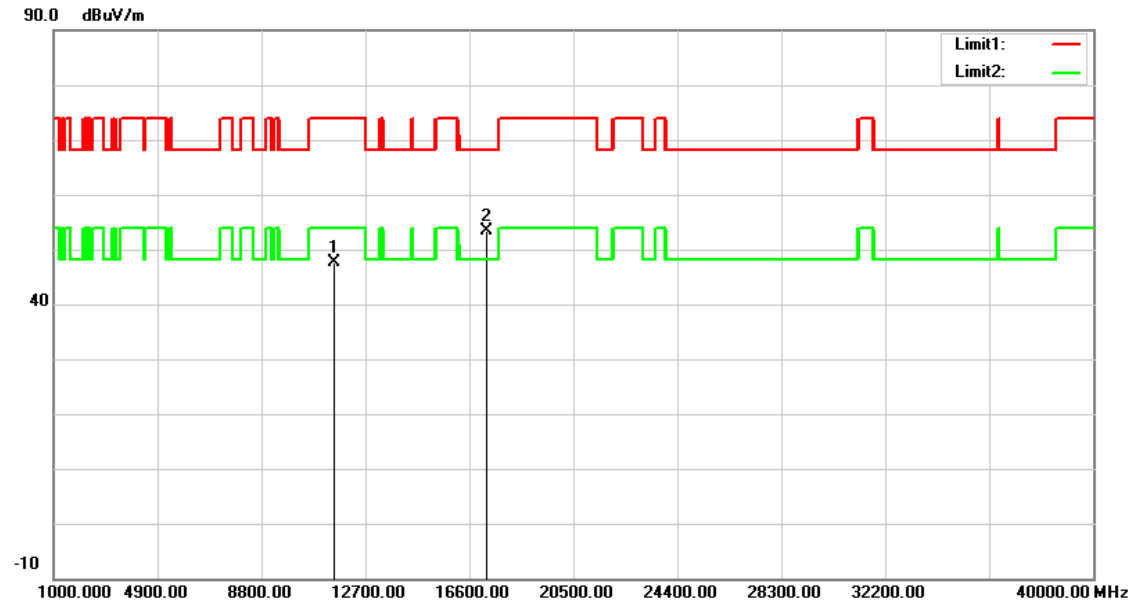


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11510.000	34.92	12.68	47.60	74.00	-26.40	peak
2	17265.000	34.77	18.72	53.49	68.20	-14.71	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5795 MHz		
Mode:	Mode 17		
Ant.Polar.:	Horizontal		

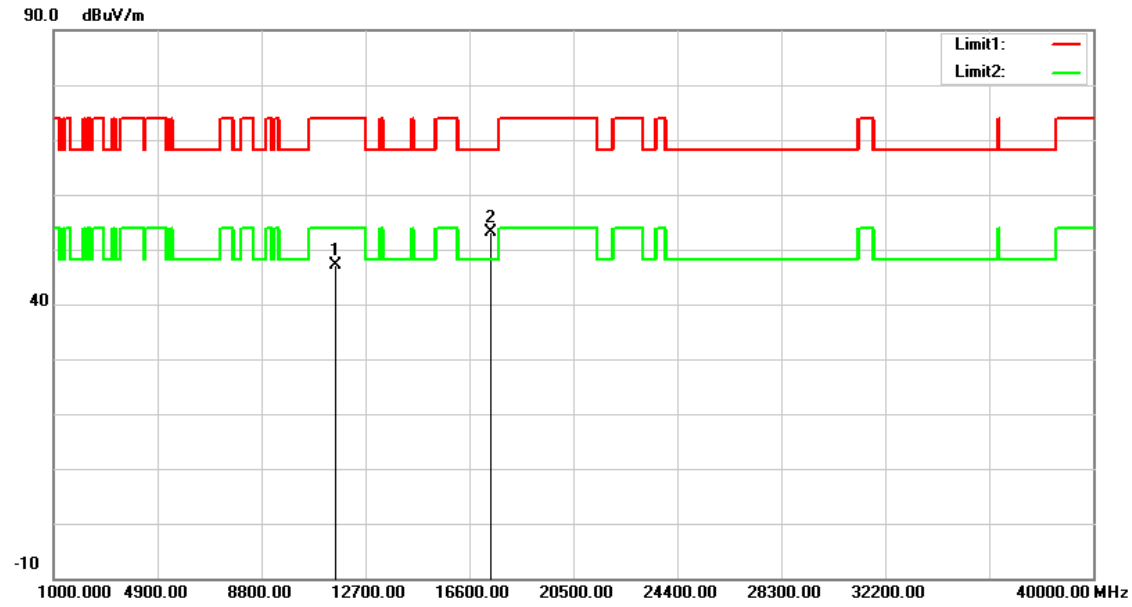


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11590.000	34.69	12.56	47.25	74.00	-26.75	peak
2	17385.000	33.57	19.52	53.09	68.20	-15.11	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5795 MHz		
Mode:	Mode 17		
Ant.Polar.:	Vertical		

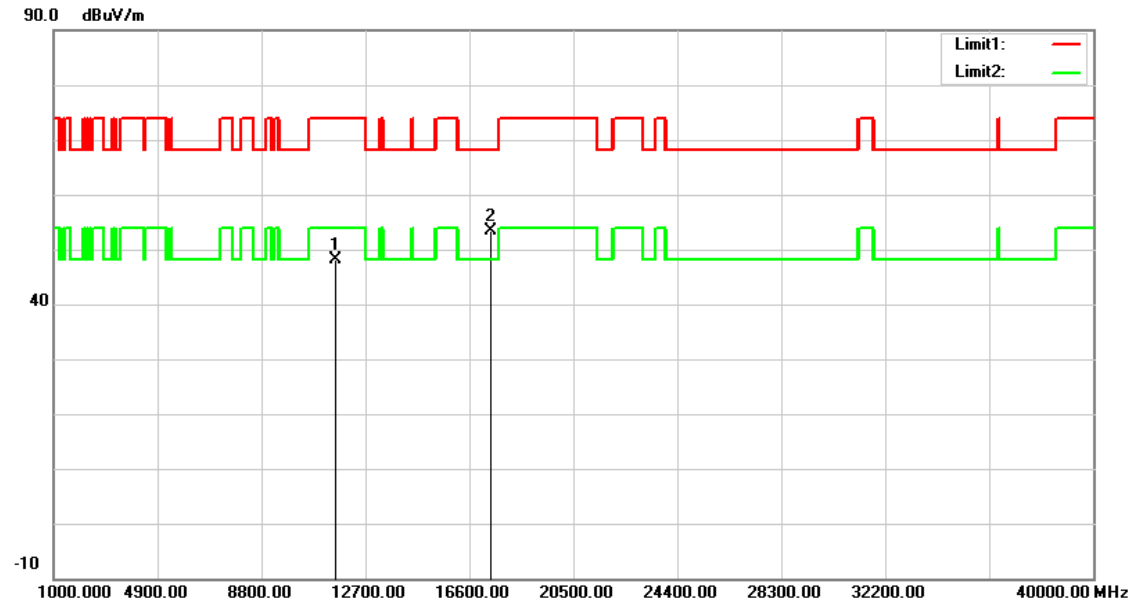


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11590.000	35.69	12.56	48.25	74.00	-25.75	peak
2	17385.000	33.78	19.52	53.30	68.20	-14.90	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5210 MHz		
Mode:	Mode 18		
Ant.Polar.:	Horizontal		

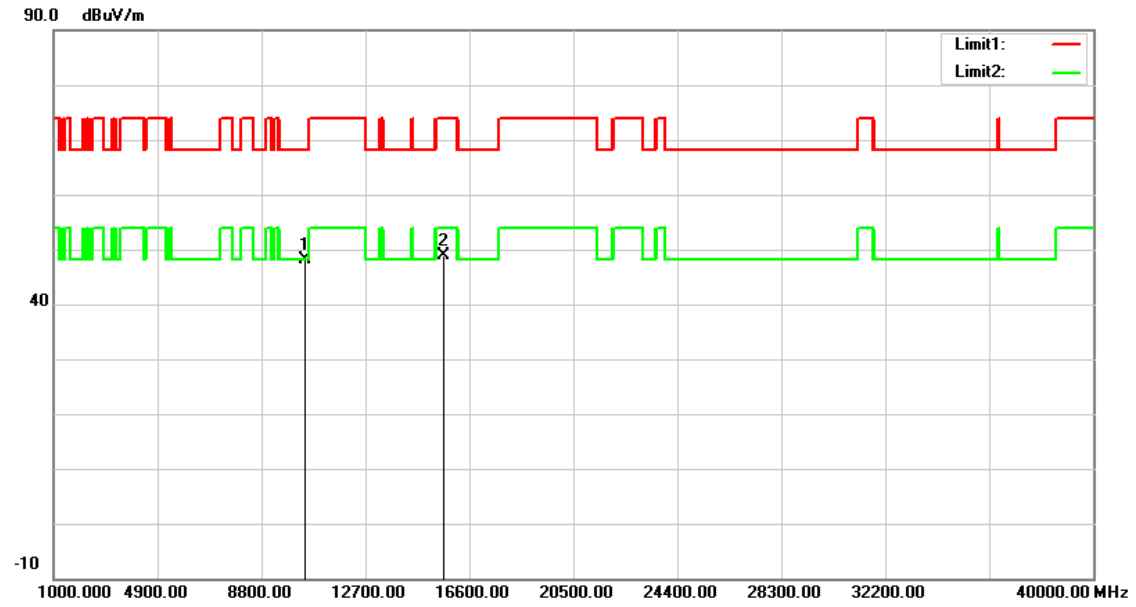


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10420.000	36.32	11.85	48.17	68.20	-20.03	peak
2	15630.000	34.59	14.33	48.92	74.00	-25.08	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5210 MHz		
Mode:	Mode 18		
Ant.Polar.:	Vertical		

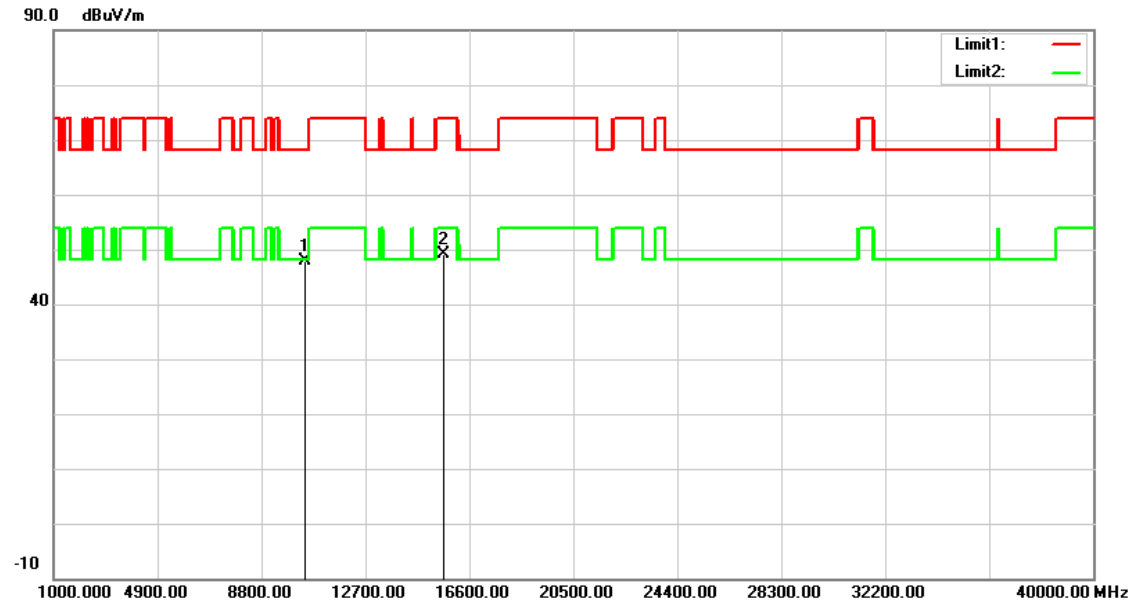


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10420.000	36.15	11.85	48.00	68.20	-20.20	peak
2	15630.000	34.75	14.33	49.08	74.00	-24.92	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5290 MHz		
Mode:	Mode 18		
Ant.Polar.:	Horizontal		

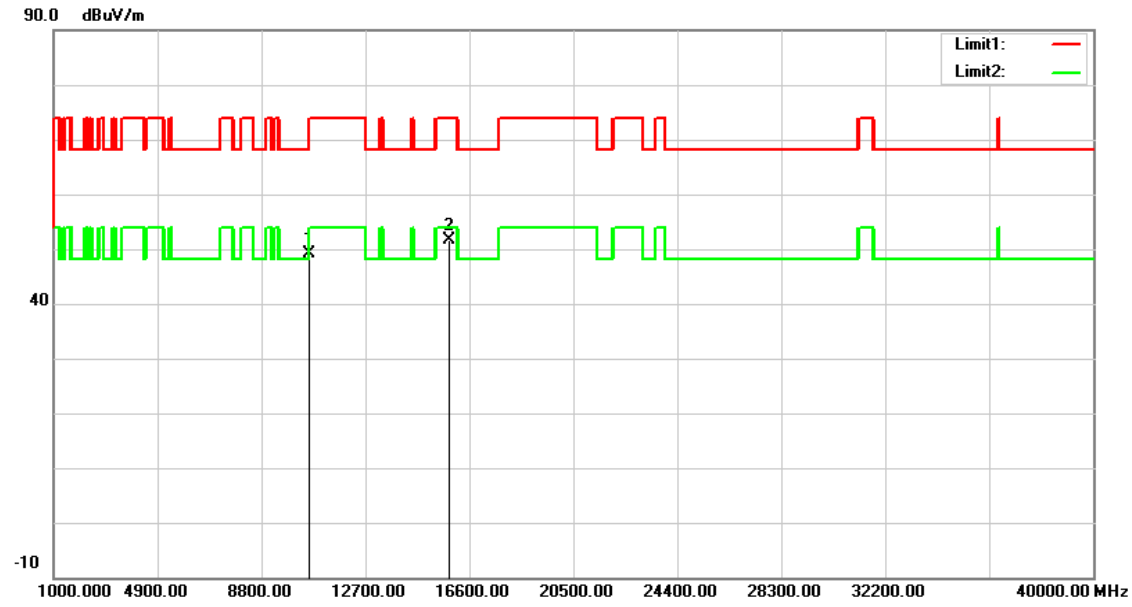


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10580.000	33.15	15.88	49.03	68.20	-19.17	peak
2	15870.000	33.82	17.77	51.59	74.00	-22.41	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5290 MHz		
Mode:	Mode 18		
Ant.Polar.:	Vertical		

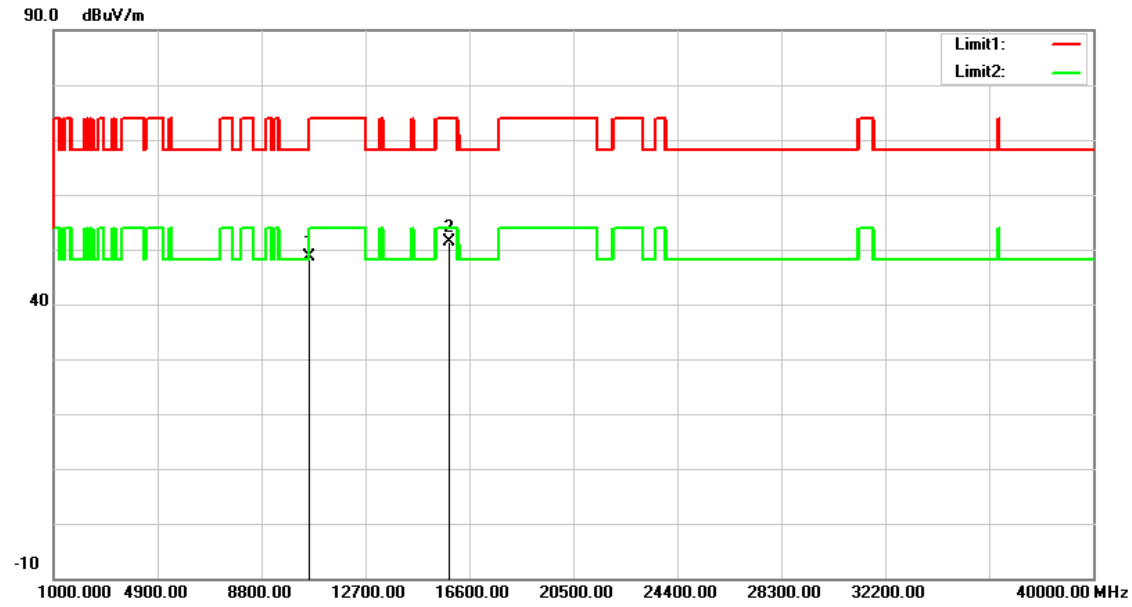


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10580.000	32.83	15.88	48.71	68.20	-19.49	peak
2	15870.000	33.58	17.77	51.35	74.00	-22.65	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5530 MHz		
Mode:	Mode 18		
Ant.Polar.:	Horizontal		

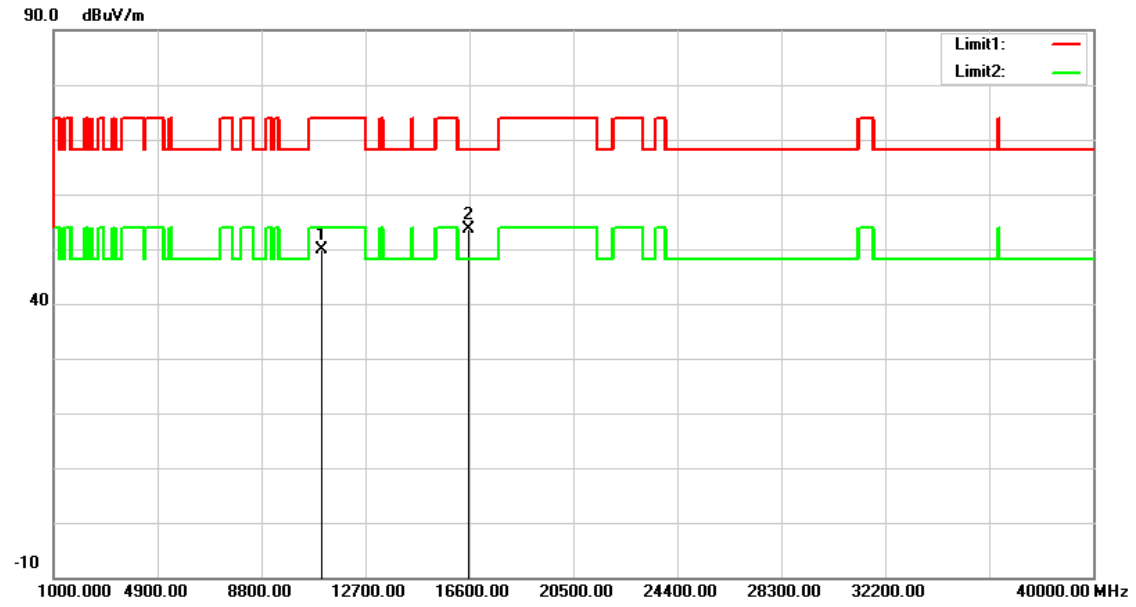


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11060.000	33.15	16.65	49.80	74.00	-24.20	peak
2	16590.000	33.42	20.31	53.73	68.20	-14.47	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5530 MHz		
Mode:	Mode 18		
Ant.Polar.:	Vertical		

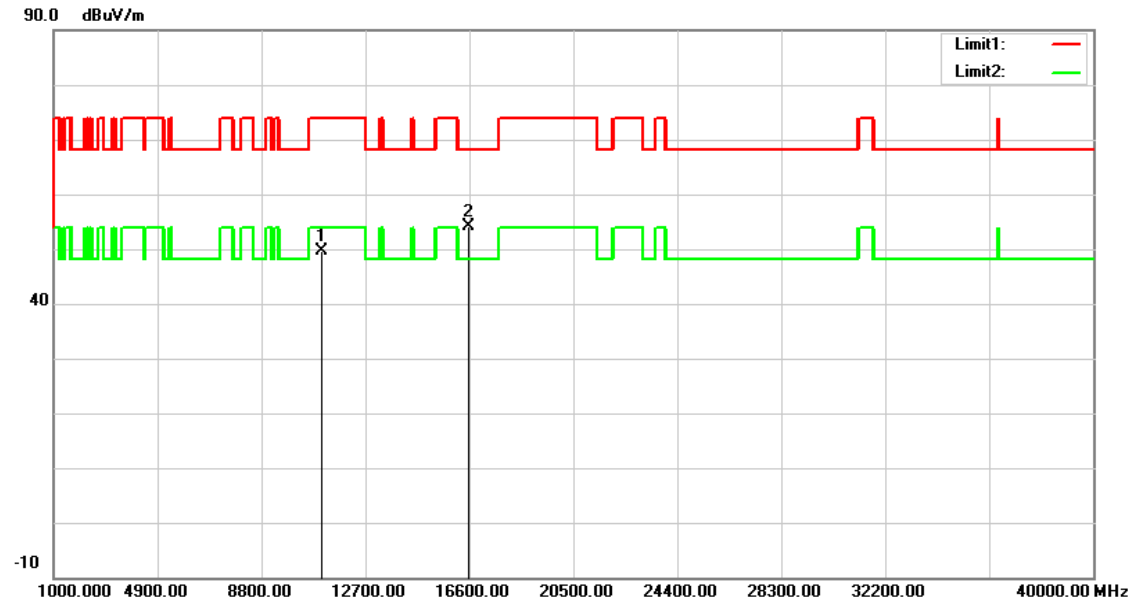


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11060.000	33.06	16.65	49.71	74.00	-24.29	peak
2	16590.000	33.81	20.31	54.12	68.20	-14.08	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5775 MHz		
Mode:	Mode 18		
Ant.Polar.:	Horizontal		

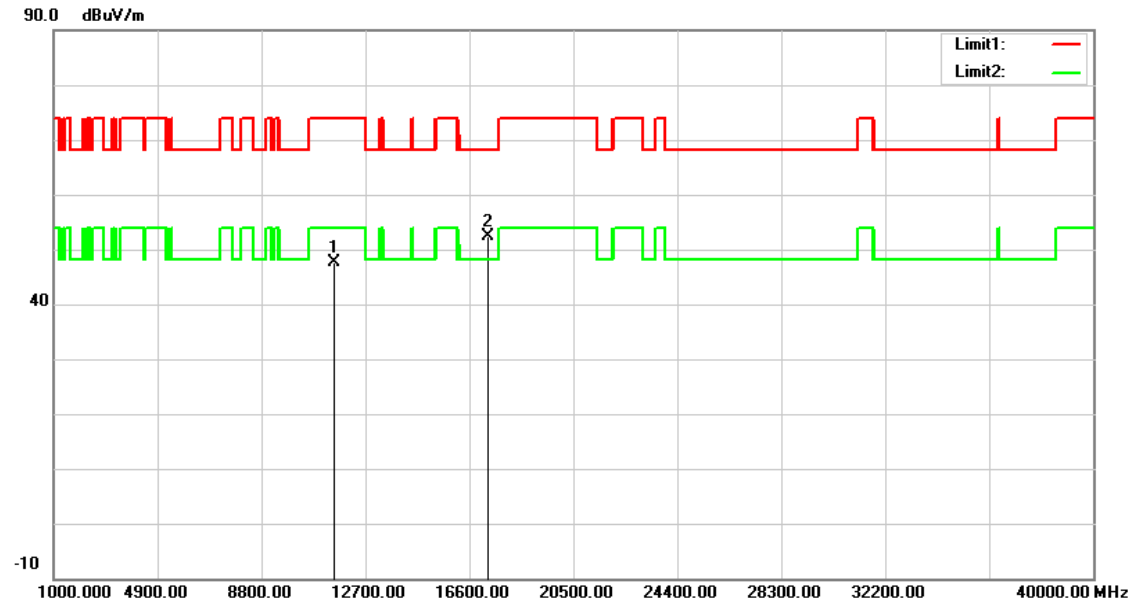


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11550.000	35.04	12.62	47.66	74.00	-26.34	peak
2	17325.000	33.38	19.12	52.50	68.20	-15.70	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5775 MHz		
Mode:	Mode 18		
Ant.Polar.:	Vertical		

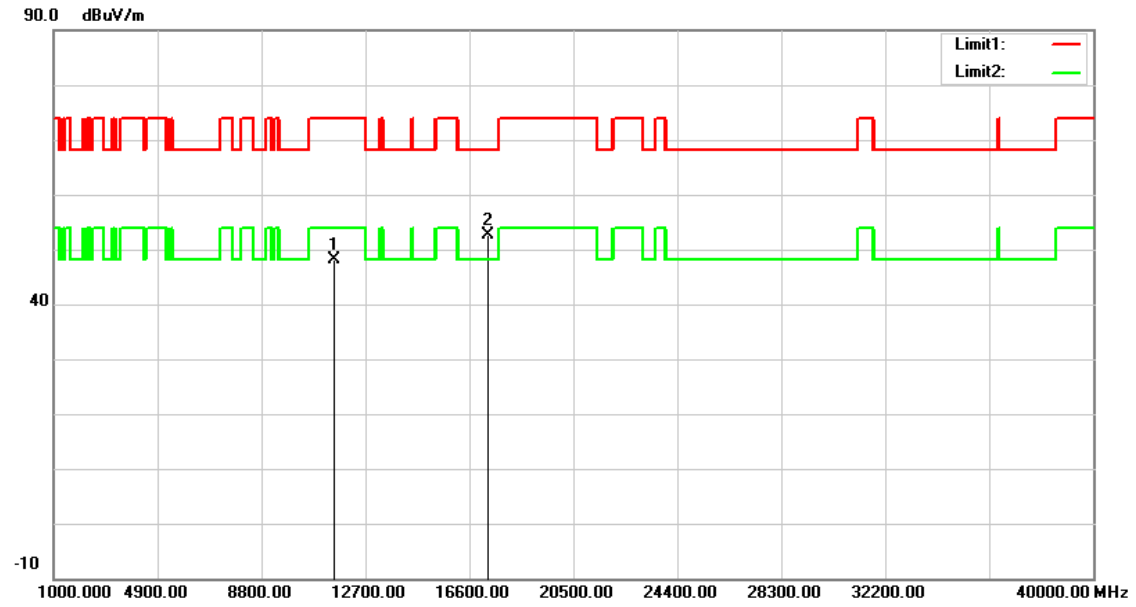

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11550.000	35.53	12.62	48.15	74.00	-25.85	peak
2	17325.000	33.58	19.12	52.70	68.20	-15.50	peak


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

頻帶邊緣

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5180 MHz		
Mode:	Mode 13		
Ant.Polar.:	Horizontal		

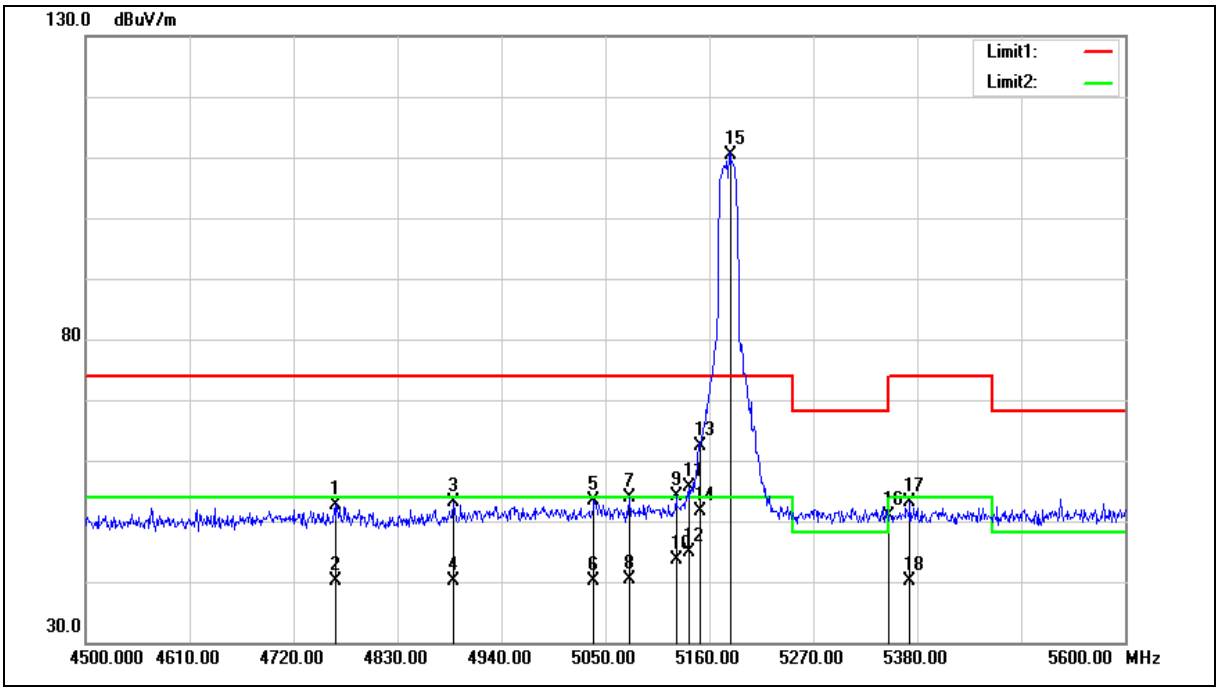

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5180 MHz		
Mode:	Mode 13		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4765.100	54.09	-1.41	52.68	74.00	-21.32	peak
2	4765.100	41.52	-1.41	40.11	54.00	-13.89	AVG
3	4889.400	54.08	-1.07	53.01	74.00	-20.99	peak
4	4889.400	41.12	-1.07	40.05	54.00	-13.95	AVG
5	5037.900	53.99	-0.69	53.30	74.00	-20.70	peak
6	5037.900	40.88	-0.69	40.19	54.00	-13.81	AVG
7	5075.300	54.51	-0.62	53.89	74.00	-20.11	peak
8	5075.300	40.88	-0.62	40.26	54.00	-13.74	AVG
9	5124.800	54.63	-0.52	54.11	74.00	-19.89	peak
10	5124.800	44.04	-0.52	43.52	54.00	-10.48	AVG
11	5138.000	56.14	-0.49	55.65	74.00	-18.35	peak
12	5138.000	45.42	-0.49	44.93	54.00	-9.07	AVG
13	5150.000	62.79	-0.48	62.31	74.00	-11.69	peak
14	5150.000	51.99	-0.48	51.51	54.00	-2.49	AVG
15	5182.000	110.80	-0.40	110.40	--	--	peak
16	5350.000	51.06	-0.08	50.98	74.00	-23.02	peak
17	5372.300	53.07	-0.03	53.04	74.00	-20.96	peak
18	5372.300	40.16	-0.03	40.13	54.00	-13.87	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5180 MHz		
Mode:	Mode 13		
Ant.Polar.:	Vertical		

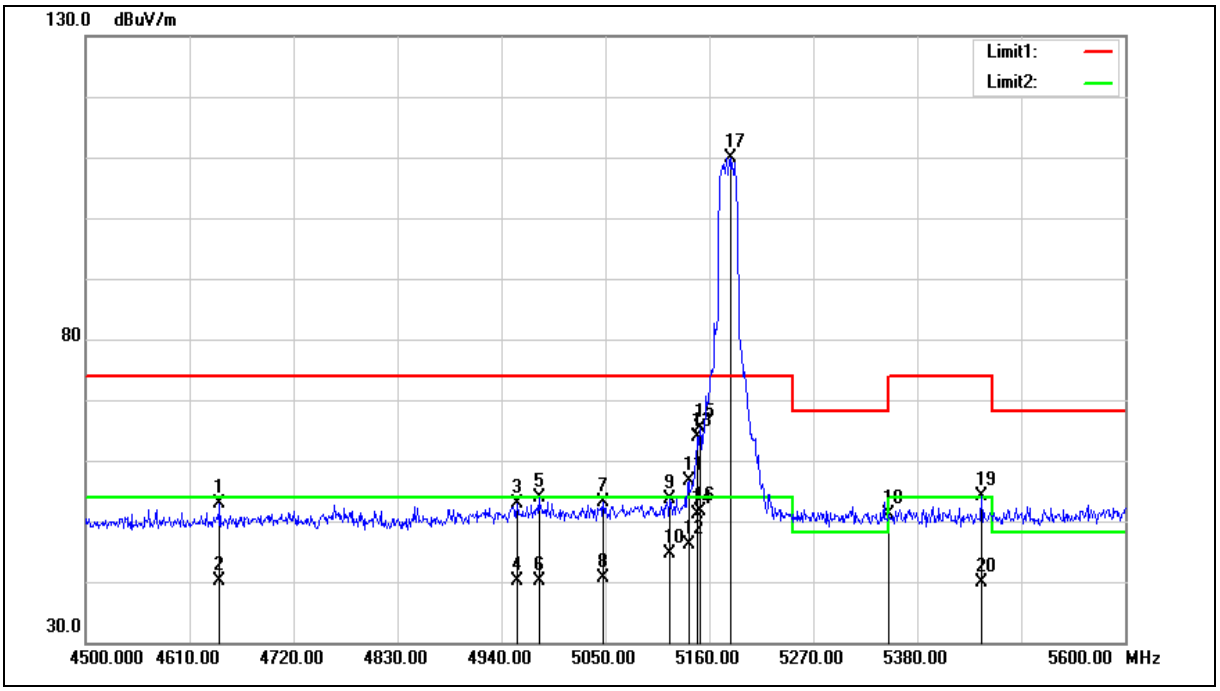

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5180 MHz		
Mode:	Mode 13		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4641.900	54.68	-1.75	52.93	74.00	-21.07	peak
2	4641.900	41.95	-1.75	40.20	54.00	-13.80	AVG
3	4956.500	53.84	-0.89	52.95	74.00	-21.05	peak
4	4956.500	41.14	-0.89	40.25	54.00	-13.75	AVG
5	4979.600	54.70	-0.83	53.87	74.00	-20.13	peak
6	4979.600	40.97	-0.83	40.14	54.00	-13.86	AVG
7	5047.800	53.73	-0.68	53.05	74.00	-20.95	peak
8	5047.800	41.33	-0.68	40.65	54.00	-13.35	AVG
9	5118.200	54.26	-0.54	53.72	74.00	-20.28	peak
10	5118.200	45.24	-0.54	44.70	54.00	-9.30	AVG
11	5138.000	57.07	-0.49	56.58	74.00	-17.42	peak
12	5138.000	46.68	-0.49	46.19	54.00	-7.81	AVG
13	5147.900	64.42	-0.48	63.94	74.00	-10.06	peak
14	5147.900	51.57	-0.48	51.09	54.00	-2.91	AVG
15	5150.000	65.79	-0.48	65.31	74.00	-8.69	peak
16	5150.000	52.21	-0.48	51.73	54.00	-2.27	AVG
17	5182.000	110.23	-0.40	109.83	--	--	peak
18	5350.000	51.16	-0.08	51.08	74.00	-22.92	peak
19	5448.200	53.97	0.12	54.09	74.00	-19.91	peak
20	5448.200	39.85	0.12	39.97	54.00	-14.03	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5200 MHz		
Mode:	Mode 13		
Ant.Polar.:	Horizontal		

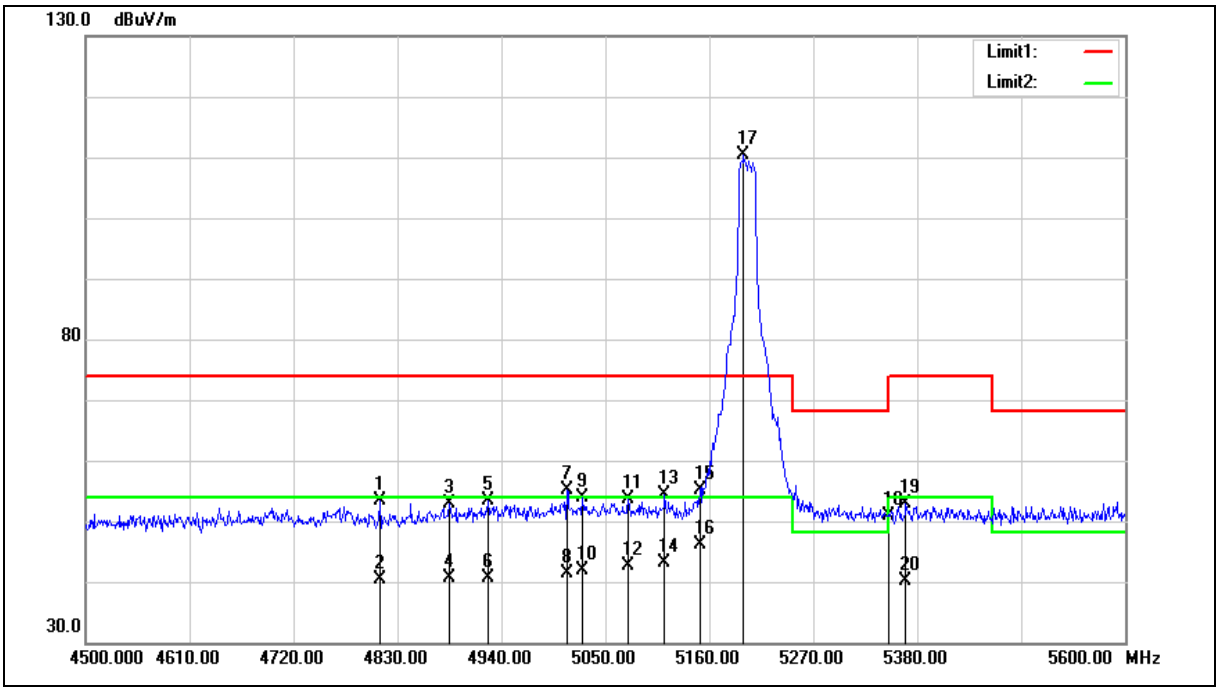

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5200 MHz		
Mode:	Mode 13		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4811.300	54.68	-1.29	53.39	74.00	-20.61	peak
2	4811.300	41.57	-1.29	40.28	54.00	-13.72	AVG
3	4885.000	54.08	-1.09	52.99	74.00	-21.01	peak
4	4885.000	41.61	-1.09	40.52	54.00	-13.48	AVG
5	4925.700	54.36	-0.97	53.39	74.00	-20.61	peak
6	4925.700	41.68	-0.97	40.71	54.00	-13.29	AVG
7	5009.300	55.80	-0.75	55.05	74.00	-18.95	peak
8	5009.300	42.06	-0.75	41.31	54.00	-12.69	AVG
9	5025.800	54.55	-0.72	53.83	74.00	-20.17	peak
10	5025.800	42.51	-0.72	41.79	54.00	-12.21	AVG
11	5074.200	54.29	-0.62	53.67	74.00	-20.33	peak
12	5074.200	43.19	-0.62	42.57	54.00	-11.43	AVG
13	5112.700	54.98	-0.55	54.43	74.00	-19.57	peak
14	5112.700	43.78	-0.55	43.23	54.00	-10.77	AVG
15	5150.000	55.60	-0.48	55.12	74.00	-18.88	peak
16	5150.000	46.57	-0.48	46.09	54.00	-7.91	AVG
17	5196.300	110.79	-0.38	110.41	--	--	peak
18	5350.000	50.93	-0.08	50.85	74.00	-23.15	peak
19	5367.900	52.93	-0.05	52.88	74.00	-21.12	peak
20	5367.900	40.10	-0.05	40.05	54.00	-13.95	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5200 MHz		
Mode:	Mode 13		
Ant.Polar.:	Vertical		

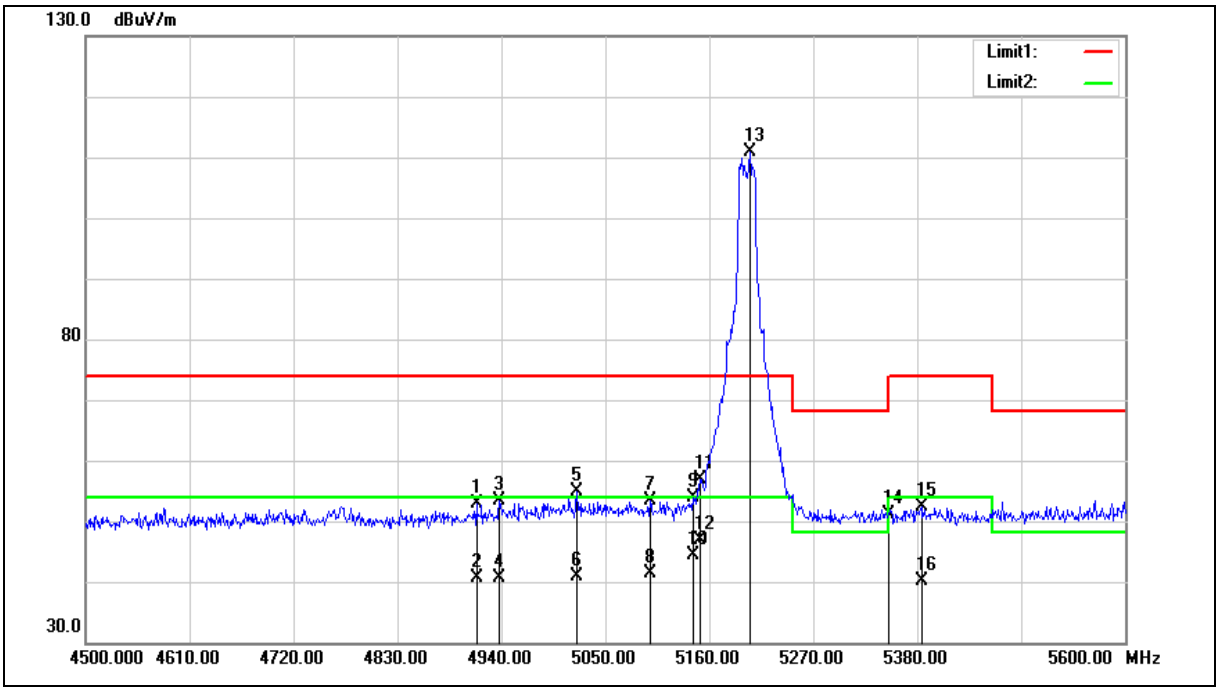

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5200 MHz		
Mode:	Mode 13		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4913.600	53.78	-1.01	52.77	74.00	-21.23	peak
2	4913.600	41.56	-1.01	40.55	54.00	-13.45	AVG
3	4937.800	54.30	-0.94	53.36	74.00	-20.64	peak
4	4937.800	41.65	-0.94	40.71	54.00	-13.29	AVG
5	5020.300	55.65	-0.73	54.92	74.00	-19.08	peak
6	5020.300	41.66	-0.73	40.93	54.00	-13.07	AVG
7	5097.300	54.07	-0.57	53.50	74.00	-20.50	peak
8	5097.300	41.85	-0.57	41.28	54.00	-12.72	AVG
9	5142.400	54.28	-0.49	53.79	74.00	-20.21	peak
10	5142.400	44.83	-0.49	44.34	54.00	-9.66	AVG
11	5150.000	57.24	-0.48	56.76	74.00	-17.24	peak
12	5150.000	47.30	-0.48	46.82	54.00	-7.18	AVG
13	5202.900	111.13	-0.37	110.76	--	--	peak
14	5350.000	51.09	-0.08	51.01	74.00	-22.99	peak
15	5384.400	52.28	-0.01	52.27	74.00	-21.73	peak
16	5384.400	40.18	-0.01	40.17	54.00	-13.83	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5240 MHz		
Mode:	Mode 13		
Ant.Polar.:	Horizontal		

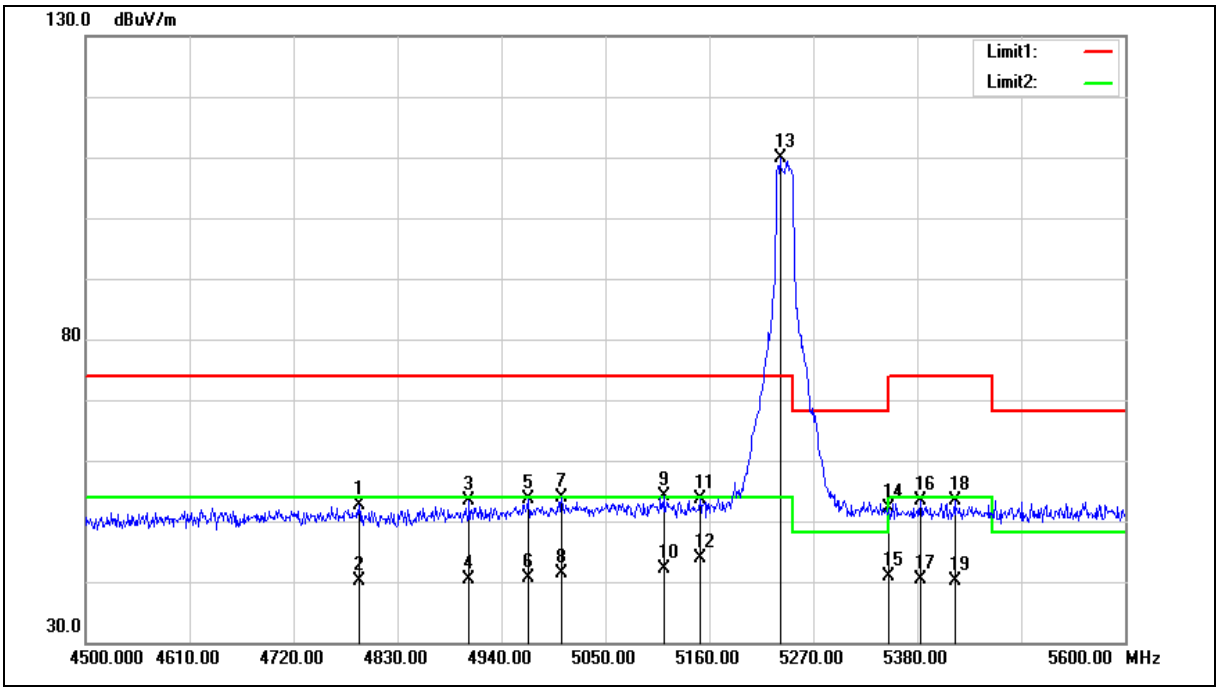

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5240 MHz		
Mode:	Mode 13		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4789.300	53.91	-1.35	52.56	74.00	-21.44	peak
2	4789.300	41.55	-1.35	40.20	54.00	-13.80	AVG
3	4905.900	54.41	-1.03	53.38	74.00	-20.62	peak
4	4905.900	41.30	-1.03	40.27	54.00	-13.73	AVG
5	4968.600	54.40	-0.86	53.54	74.00	-20.46	peak
6	4968.600	41.42	-0.86	40.56	54.00	-13.44	AVG
7	5003.800	54.76	-0.77	53.99	74.00	-20.01	peak
8	5003.800	42.18	-0.77	41.41	54.00	-12.59	AVG
9	5111.600	54.67	-0.55	54.12	74.00	-19.88	peak
10	5111.600	42.60	-0.55	42.05	54.00	-11.95	AVG
11	5150.000	54.02	-0.48	53.54	74.00	-20.46	peak
12	5150.000	44.31	-0.48	43.83	54.00	-10.17	AVG
13	5234.800	110.07	-0.31	109.76	--	--	peak
14	5350.000	52.26	-0.08	52.18	74.00	-21.82	peak
15	5350.000	40.90	-0.08	40.82	54.00	-13.18	AVG
16	5383.300	53.39	-0.02	53.37	74.00	-20.63	peak
17	5383.300	40.45	-0.02	40.43	54.00	-13.57	AVG
18	5419.600	53.31	0.06	53.37	74.00	-20.63	peak
19	5419.600	40.09	0.06	40.15	54.00	-13.85	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5240 MHz		
Mode:	Mode 13		
Ant.Polar.:	Vertical		

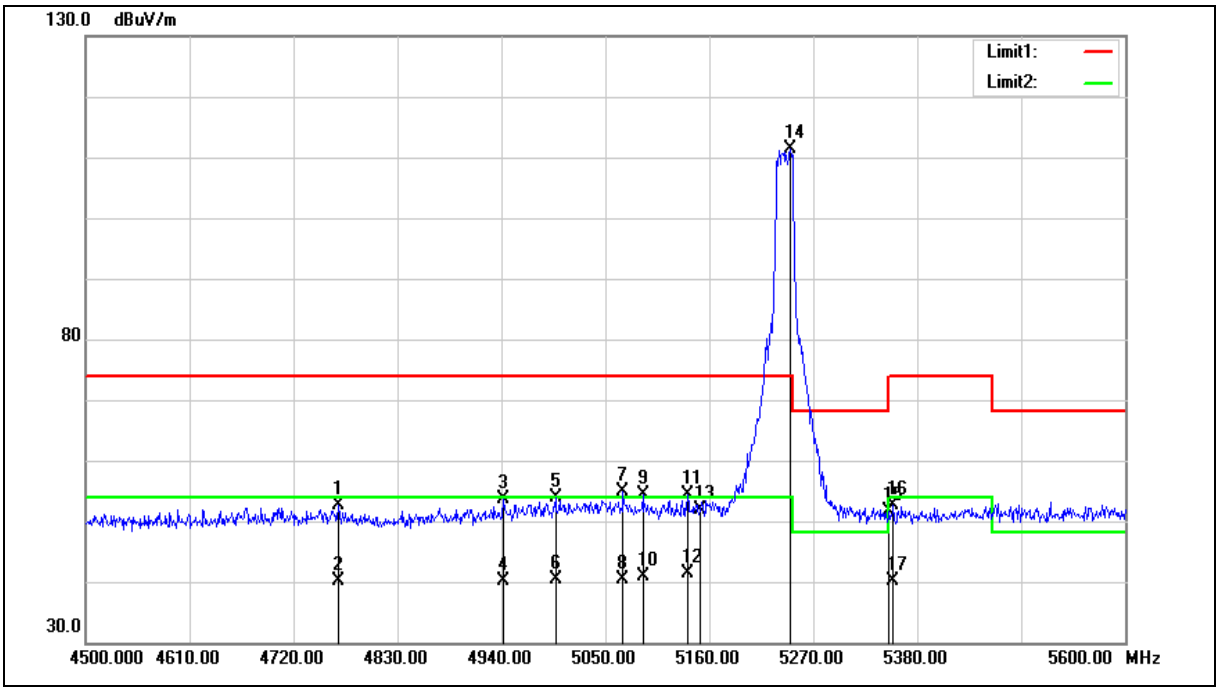

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5240 MHz		
Mode:	Mode 13		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4767.300	54.15	-1.41	52.74	74.00	-21.26	peak
2	4767.300	41.60	-1.41	40.19	54.00	-13.81	AVG
3	4942.200	54.64	-0.93	53.71	74.00	-20.29	peak
4	4942.200	41.15	-0.93	40.22	54.00	-13.78	AVG
5	4997.200	54.63	-0.78	53.85	74.00	-20.15	peak
6	4997.200	41.09	-0.78	40.31	54.00	-13.69	AVG
7	5068.700	55.40	-0.64	54.76	74.00	-19.24	peak
8	5068.700	41.00	-0.64	40.36	54.00	-13.64	AVG
9	5089.600	54.90	-0.60	54.30	74.00	-19.70	peak
10	5089.600	41.38	-0.60	40.78	54.00	-13.22	AVG
11	5136.900	54.79	-0.50	54.29	74.00	-19.71	peak
12	5136.900	41.85	-0.50	41.35	54.00	-12.65	AVG
13	5150.000	52.42	-0.48	51.94	74.00	-22.06	peak
14	5245.800	111.62	-0.28	111.34	--	--	peak
15	5350.000	51.64	-0.08	51.56	74.00	-22.44	peak
16	5354.700	52.64	-0.08	52.56	74.00	-21.44	peak
17	5354.700	40.24	-0.08	40.16	54.00	-13.84	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5260 MHz		
Mode:	Mode 13		
Ant.Polar.:	Horizontal		

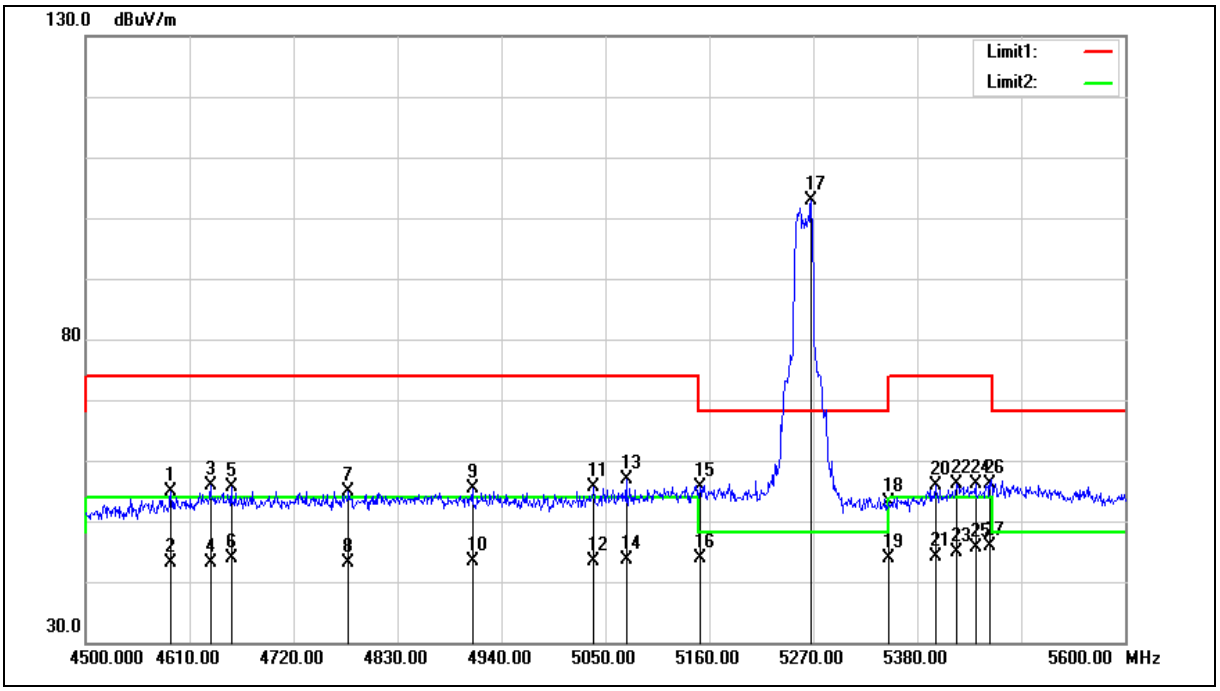

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5260 MHz		
Mode:	Mode 13		
Ant.Polar.:	Horizontal		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4590.200	51.08	3.70	54.78	74.00	-19.22	peak
2	4590.200	39.37	3.70	43.07	54.00	-10.93	AVG
3	4632.000	52.08	3.81	55.89	74.00	-18.11	peak
4	4632.000	39.20	3.81	43.01	54.00	-10.99	AVG
5	4654.000	51.64	3.88	55.52	74.00	-18.48	peak
6	4654.000	40.00	3.88	43.88	54.00	-10.12	AVG
7	4778.300	50.77	4.19	54.96	74.00	-19.04	peak
8	4778.300	39.01	4.19	43.20	54.00	-10.80	AVG
9	4909.200	50.82	4.52	55.34	74.00	-18.66	peak
10	4909.200	38.91	4.52	43.43	54.00	-10.57	AVG
11	5037.900	50.79	4.84	55.63	74.00	-18.37	peak
12	5037.900	38.63	4.84	43.47	54.00	-10.53	AVG
13	5072.000	51.93	4.93	56.86	74.00	-17.14	peak
14	5072.000	38.69	4.93	43.62	54.00	-10.38	AVG
15	5150.000	50.41	5.12	55.53	74.00	-18.47	peak
16	5150.000	38.75	5.12	43.87	54.00	-10.13	AVG
17	5267.800	97.57	5.40	102.97	--	--	peak
18	5350.000	47.46	5.61	53.07	74.00	-20.93	peak
19	5350.000	38.36	5.61	43.97	54.00	-10.03	AVG
20	5399.800	50.13	5.73	55.86	74.00	-18.14	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5260 MHz		
Mode:	Mode 13		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
21	5399.800	38.41	5.73	44.14	54.00	-9.86	AVG
22	5421.800	50.37	5.79	56.16	74.00	-17.84	peak
23	5421.800	39.04	5.79	44.83	54.00	-9.17	AVG
24	5441.600	50.33	5.82	56.15	74.00	-17.85	peak
25	5441.600	39.74	5.82	45.56	54.00	-8.44	AVG
26	5457.000	50.18	5.87	56.05	74.00	-17.95	peak
27	5457.000	40.01	5.87	45.88	54.00	-8.12	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5260 MHz		
Mode:	Mode 13		
Ant.Polar.:	Vertical		

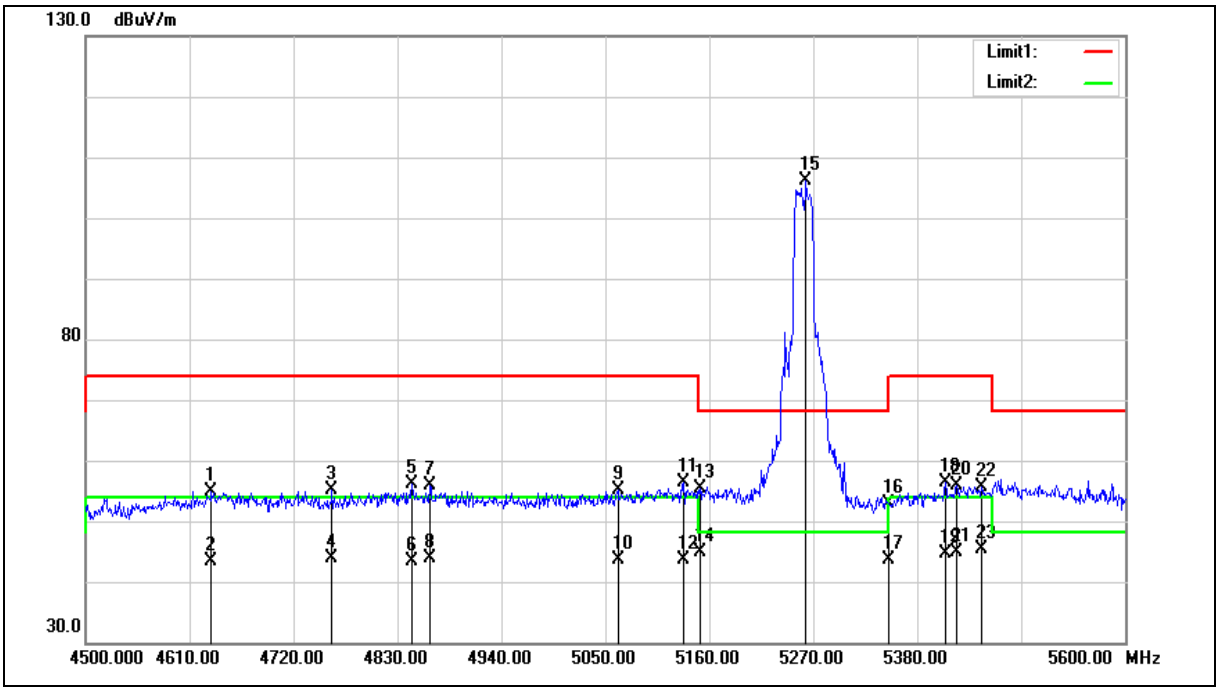

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5260 MHz		
Mode:	Mode 13		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4633.100	51.07	3.81	54.88	74.00	-19.12	peak
2	4633.100	39.63	3.81	43.44	54.00	-10.56	AVG
3	4760.700	50.93	4.14	55.07	74.00	-18.93	peak
4	4760.700	39.65	4.14	43.79	54.00	-10.21	AVG
5	4845.400	51.81	4.35	56.16	74.00	-17.84	peak
6	4845.400	39.13	4.35	43.48	54.00	-10.52	AVG
7	4864.100	51.38	4.40	55.78	74.00	-18.22	peak
8	4864.100	39.45	4.40	43.85	54.00	-10.15	AVG
9	5063.200	50.30	4.90	55.20	74.00	-18.80	peak
10	5063.200	38.80	4.90	43.70	54.00	-10.30	AVG
11	5132.500	51.22	5.08	56.30	74.00	-17.70	peak
12	5132.500	38.67	5.08	43.75	54.00	-10.25	AVG
13	5150.000	50.30	5.12	55.42	74.00	-18.58	peak
14	5150.000	39.84	5.12	44.96	54.00	-9.04	AVG
15	5262.300	100.66	5.39	106.05	--	--	peak
16	5350.000	47.28	5.61	52.89	74.00	-21.11	peak
17	5350.000	38.01	5.61	43.62	54.00	-10.38	AVG
18	5409.700	50.56	5.76	56.32	74.00	-17.68	peak
19	5409.700	38.95	5.76	44.71	54.00	-9.29	AVG
20	5421.800	50.20	5.79	55.99	74.00	-18.01	peak
21	5421.800	39.06	5.79	44.85	54.00	-9.15	AVG
22	5448.200	49.82	5.85	55.67	74.00	-18.33	peak
23	5448.200	39.42	5.85	45.27	54.00	-8.73	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5280 MHz		
Mode:	Mode 13		
Ant.Polar.:	Horizontal		

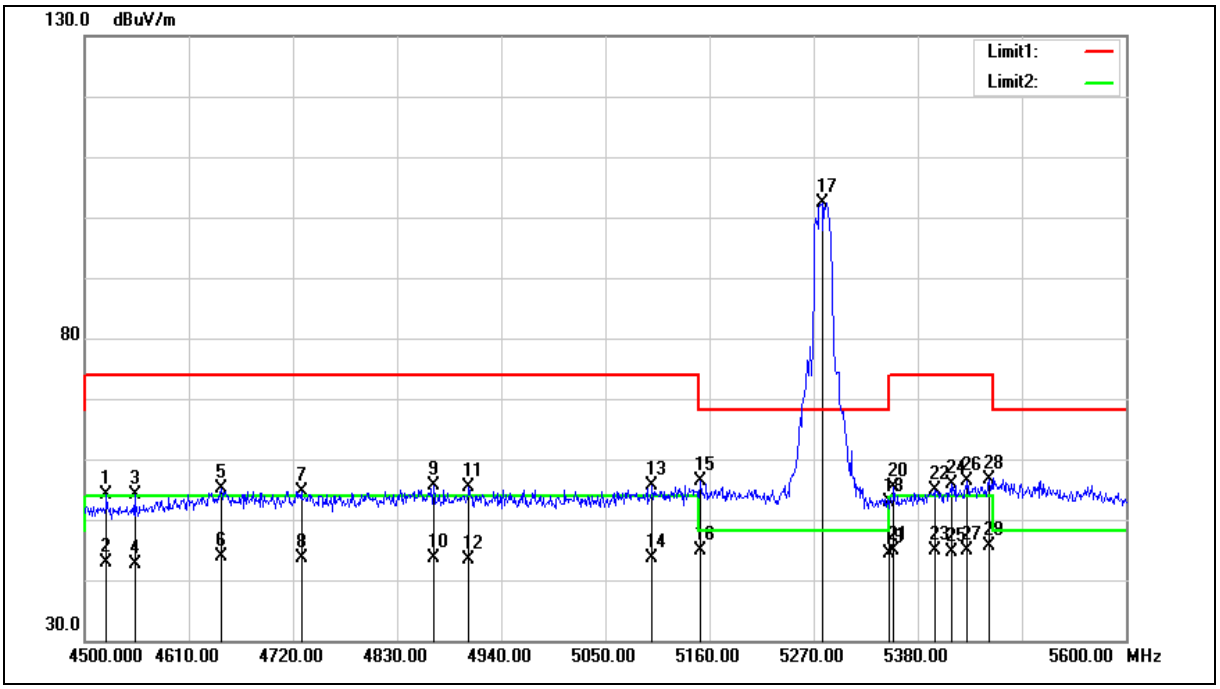

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5280 MHz		
Mode:	Mode 13		
Ant.Polar.:	Horizontal		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4523.100	50.64	3.55	54.19	74.00	-19.81	peak
2	4523.100	39.25	3.55	42.80	54.00	-11.20	AVG
3	4552.800	50.46	3.61	54.07	74.00	-19.93	peak
4	4552.800	39.04	3.61	42.65	54.00	-11.35	AVG
5	4644.100	51.35	3.84	55.19	74.00	-18.81	peak
6	4644.100	39.99	3.84	43.83	54.00	-10.17	AVG
7	4728.800	50.57	4.06	54.63	74.00	-19.37	peak
8	4728.800	39.67	4.06	43.73	54.00	-10.27	AVG
9	4868.500	51.17	4.42	55.59	74.00	-18.41	peak
10	4868.500	39.17	4.42	43.59	54.00	-10.41	AVG
11	4905.900	50.83	4.51	55.34	74.00	-18.66	peak
12	4905.900	38.95	4.51	43.46	54.00	-10.54	AVG
13	5099.500	50.62	5.00	55.62	74.00	-18.38	peak
14	5099.500	38.61	5.00	43.61	54.00	-10.39	AVG
15	5150.000	51.23	5.12	56.35	74.00	-17.65	peak
16	5150.000	39.84	5.12	44.96	54.00	-9.04	AVG
17	5278.800	96.96	5.43	102.39	--	--	peak
18	5350.000	47.15	5.61	52.76	74.00	-21.24	peak
19	5350.000	38.71	5.61	44.32	54.00	-9.68	AVG
20	5354.700	49.71	5.62	55.33	74.00	-18.67	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5280 MHz		
Mode:	Mode 13		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
21	5354.700	39.14	5.62	44.76	54.00	-9.24	AVG
22	5398.700	49.13	5.73	54.86	74.00	-19.14	peak
23	5398.700	39.07	5.73	44.80	54.00	-9.20	AVG
24	5415.200	50.14	5.77	55.91	74.00	-18.09	peak
25	5415.200	38.96	5.77	44.73	54.00	-9.27	AVG
26	5431.700	50.56	5.82	56.38	74.00	-17.62	peak
27	5431.700	39.10	5.82	44.92	54.00	-9.08	AVG
28	5454.800	50.87	5.86	56.73	74.00	-17.27	peak
29	5454.800	39.77	5.86	45.63	54.00	-8.37	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5280 MHz		
Mode:	Mode 13		
Ant.Polar.:	Vertical		

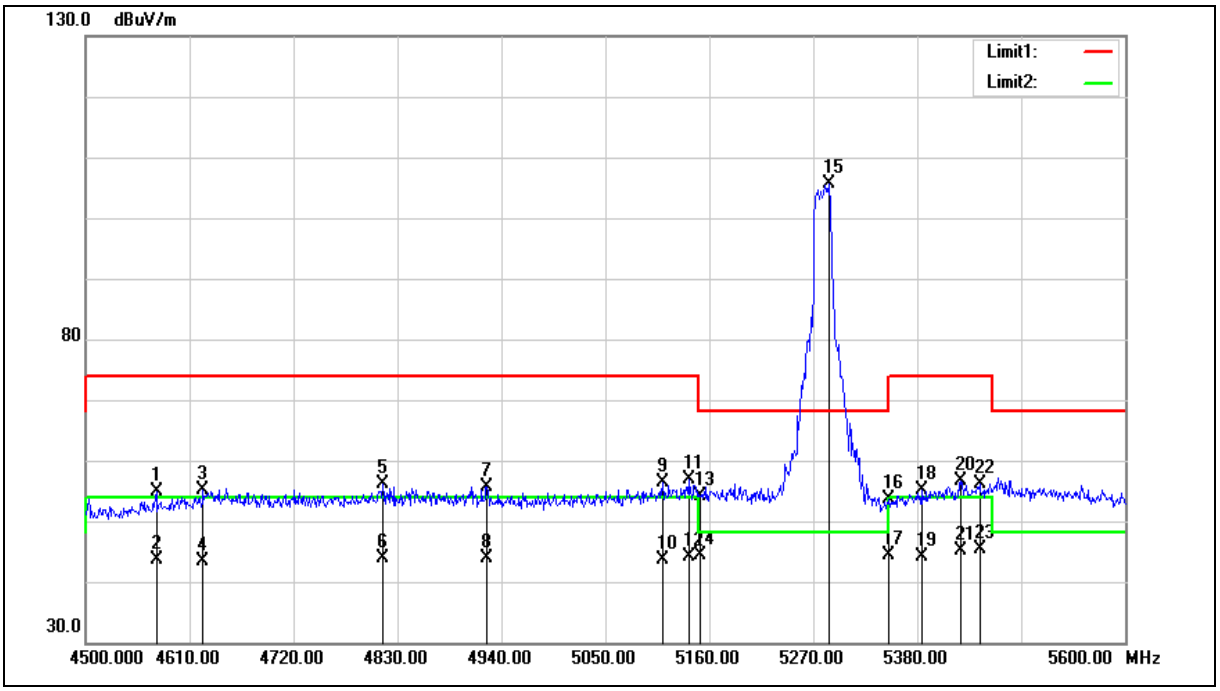

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5280 MHz		
Mode:	Mode 13		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4574.800	51.28	3.67	54.95	74.00	-19.05	peak
2	4574.800	39.88	3.67	43.55	54.00	-10.45	AVG
3	4624.300	51.40	3.80	55.20	74.00	-18.80	peak
4	4624.300	39.57	3.80	43.37	54.00	-10.63	AVG
5	4814.600	51.80	4.28	56.08	74.00	-17.92	peak
6	4814.600	39.59	4.28	43.87	54.00	-10.13	AVG
7	4924.600	51.15	4.56	55.71	74.00	-18.29	peak
8	4924.600	39.23	4.56	43.79	54.00	-10.21	AVG
9	5110.500	51.39	5.02	56.41	74.00	-17.59	peak
10	5110.500	38.53	5.02	43.55	54.00	-10.45	AVG
11	5138.000	51.83	5.09	56.92	74.00	-17.08	peak
12	5138.000	39.11	5.09	44.20	54.00	-9.80	AVG
13	5150.000	48.90	5.12	54.02	74.00	-19.98	peak
14	5150.000	39.16	5.12	44.28	54.00	-9.72	AVG
15	5286.500	100.16	5.46	105.62	--	--	peak
16	5350.000	48.11	5.61	53.72	74.00	-20.28	peak
17	5350.000	38.88	5.61	44.49	54.00	-9.51	AVG
18	5384.400	49.44	5.69	55.13	74.00	-18.87	peak
19	5384.400	38.51	5.69	44.20	54.00	-9.80	AVG
20	5426.200	50.78	5.80	56.58	74.00	-17.42	peak
21	5426.200	39.27	5.80	45.07	54.00	-8.93	AVG
22	5446.000	50.29	5.84	56.13	74.00	-17.87	peak
23	5446.000	39.49	5.84	45.33	54.00	-8.67	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5320 MHz		
Mode:	Mode 13		
Ant.Polar.:	Horizontal		

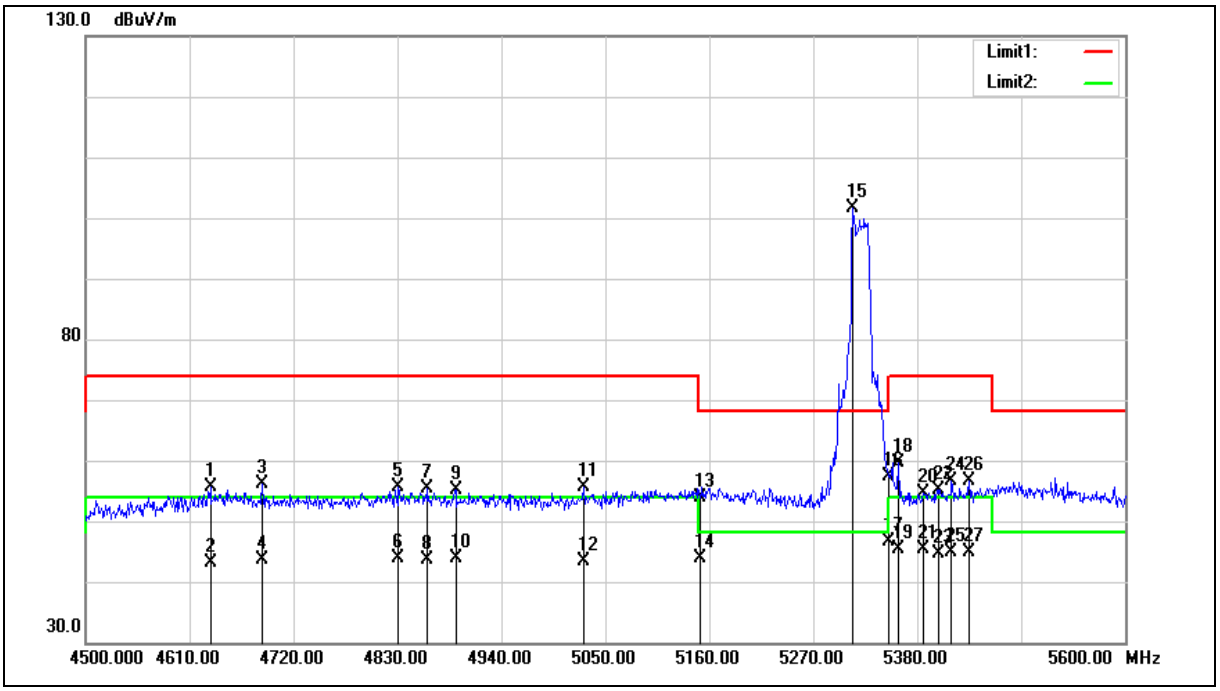

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5320 MHz		
Mode:	Mode 13		
Ant.Polar.:	Horizontal		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4632.000	51.86	3.81	55.67	74.00	-18.33	peak
2	4632.000	39.29	3.81	43.10	54.00	-10.90	AVG
3	4687.000	52.07	3.95	56.02	74.00	-17.98	peak
4	4687.000	39.68	3.95	43.63	54.00	-10.37	AVG
5	4831.100	51.42	4.32	55.74	74.00	-18.26	peak
6	4831.100	39.68	4.32	44.00	54.00	-10.00	AVG
7	4861.900	50.86	4.40	55.26	74.00	-18.74	peak
8	4861.900	39.11	4.40	43.51	54.00	-10.49	AVG
9	4891.600	50.70	4.47	55.17	74.00	-18.83	peak
10	4891.600	39.30	4.47	43.77	54.00	-10.23	AVG
11	5026.900	50.71	4.82	55.53	74.00	-18.47	peak
12	5026.900	38.67	4.82	43.49	54.00	-10.51	AVG
13	5150.000	48.81	5.12	53.93	74.00	-20.07	peak
14	5150.000	38.67	5.12	43.79	54.00	-10.21	AVG
15	5311.800	96.13	5.51	101.64	--	--	peak
16	5350.000	51.79	5.61	57.40	74.00	-16.60	peak
17	5350.000	40.98	5.61	46.59	54.00	-7.41	AVG
18	5360.200	53.94	5.64	59.58	74.00	-14.42	peak
19	5360.200	39.86	5.64	45.50	54.00	-8.50	AVG
20	5386.600	48.82	5.70	54.52	74.00	-19.48	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5320 MHz		
Mode:	Mode 13		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
21	5386.600	39.63	5.70	45.33	54.00	-8.67	AVG
22	5402.000	49.49	5.73	55.22	74.00	-18.78	peak
23	5402.000	38.92	5.73	44.65	54.00	-9.35	AVG
24	5416.300	50.87	5.77	56.64	74.00	-17.36	peak
25	5416.300	39.09	5.77	44.86	54.00	-9.14	AVG
26	5435.000	50.81	5.81	56.62	74.00	-17.38	peak
27	5435.000	39.12	5.81	44.93	54.00	-9.07	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5320 MHz		
Mode:	Mode 13		
Ant.Polar.:	Vertical		

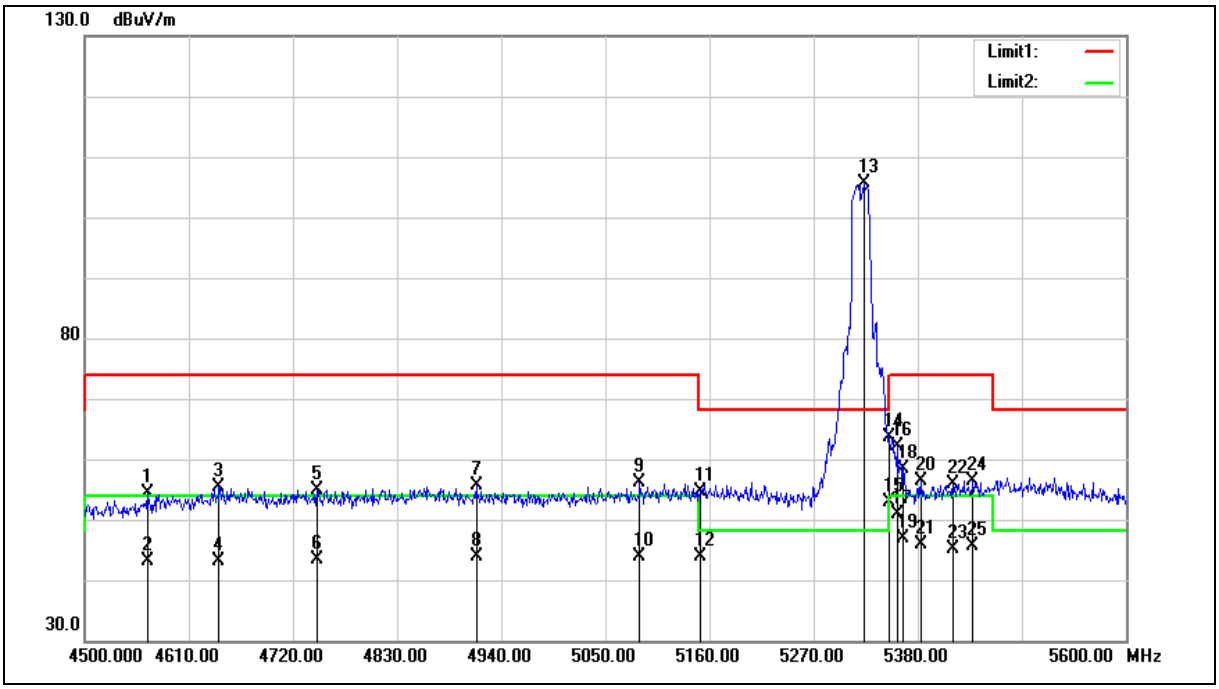

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5320 MHz		
Mode:	Mode 13		
Ant.Polar.:	Vertical		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4566.000	50.75	3.66	54.41	74.00	-19.59	peak
2	4566.000	39.39	3.66	43.05	54.00	-10.95	AVG
3	4641.900	51.64	3.84	55.48	74.00	-18.52	peak
4	4641.900	39.26	3.84	43.10	54.00	-10.90	AVG
5	4745.300	50.82	4.10	54.92	74.00	-19.08	peak
6	4745.300	39.37	4.10	43.47	54.00	-10.53	AVG
7	4913.600	50.98	4.53	55.51	74.00	-18.49	peak
8	4913.600	39.30	4.53	43.83	54.00	-10.17	AVG
9	5086.300	51.15	4.97	56.12	74.00	-17.88	peak
10	5086.300	38.96	4.97	43.93	54.00	-10.07	AVG
11	5150.000	49.48	5.12	54.60	74.00	-19.40	peak
12	5150.000	38.64	5.12	43.76	54.00	-10.24	AVG
13	5323.900	100.09	5.54	105.63	--	--	peak
14	5350.000	58.00	5.61	63.61	74.00	-10.39	peak
15	5350.000	47.19	5.61	52.80	54.00	-1.20	AVG
16	5358.000	56.54	5.63	62.17	74.00	-11.83	peak
17	5358.000	45.35	5.63	50.98	54.00	-3.02	AVG
18	5364.600	52.70	5.65	58.35	74.00	-15.65	peak
19	5364.600	41.31	5.65	46.96	54.00	-7.04	AVG
20	5383.300	50.73	5.69	56.42	74.00	-17.58	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5320 MHz		
Mode:	Mode 13		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
21	5383.300	40.28	5.69	45.97	54.00	-8.03	AVG
22	5417.400	50.23	5.77	56.00	74.00	-18.00	peak
23	5417.400	39.41	5.77	45.18	54.00	-8.82	AVG
24	5438.300	50.56	5.82	56.38	74.00	-17.62	peak
25	5438.300	39.90	5.82	45.72	54.00	-8.28	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5500 MHz		
Mode:	Mode 13		
Ant.Polar.:	Horizontal		

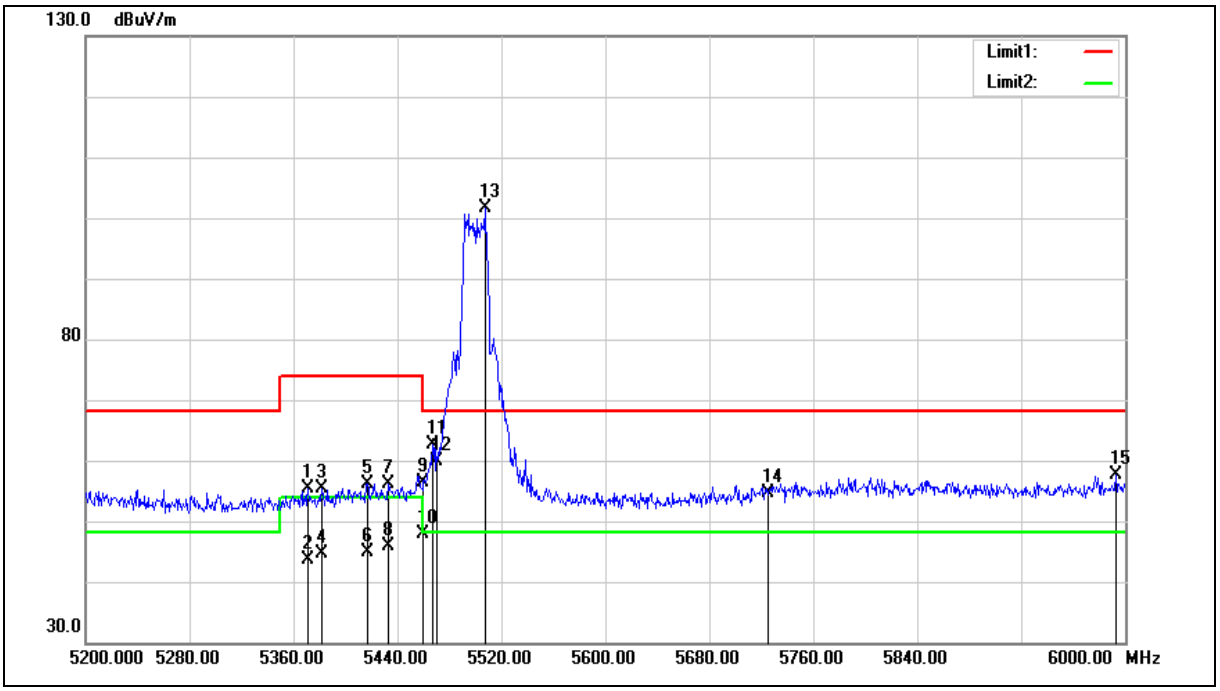

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5500 MHz		
Mode:	Mode 13		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5371.200	49.69	5.66	55.35	74.00	-18.65	peak
2	5371.200	37.96	5.66	43.62	54.00	-10.38	AVG
3	5381.600	49.70	5.69	55.39	74.00	-18.61	peak
4	5381.600	38.86	5.69	44.55	54.00	-9.45	AVG
5	5416.800	50.31	5.77	56.08	74.00	-17.92	peak
6	5416.800	39.07	5.77	44.84	54.00	-9.16	AVG
7	5432.800	50.28	5.82	56.10	74.00	-17.90	peak
8	5432.800	40.08	5.82	45.90	54.00	-8.10	AVG
9	5460.000	50.54	5.88	56.42	74.00	-17.58	peak
10	5460.000	41.90	5.88	47.78	54.00	-6.22	AVG
11	5467.200	56.68	5.89	62.57	68.20	-5.63	peak
12	5470.000	54.09	5.91	60.00	68.20	-8.20	peak
13	5507.200	95.60	5.99	101.59	--	--	peak
14	5725.000	48.18	6.47	54.65	68.20	-13.55	peak
15	5992.800	50.56	7.07	57.63	68.20	-10.57	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5500 MHz		
Mode:	Mode 13		
Ant.Polar.:	Vertical		

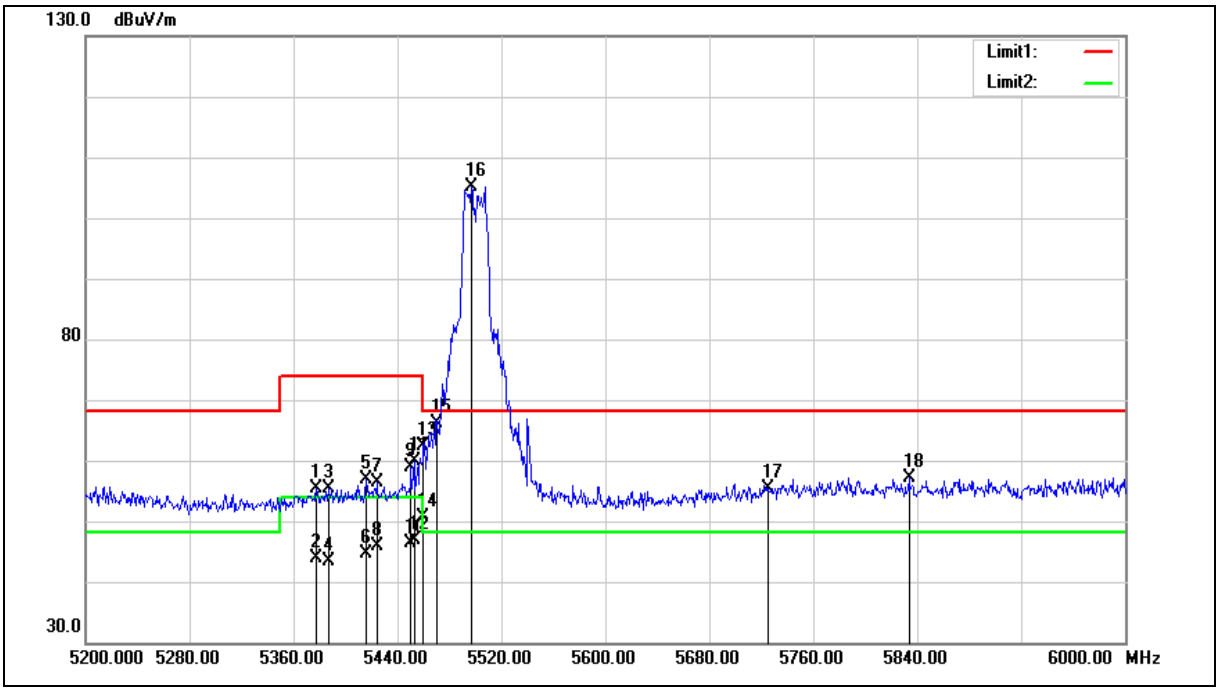

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5500 MHz		
Mode:	Mode 13		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5377.600	49.71	5.67	55.38	74.00	-18.62	peak
2	5377.600	38.10	5.67	43.77	54.00	-10.23	AVG
3	5387.200	49.70	5.70	55.40	74.00	-18.60	peak
4	5387.200	37.71	5.70	43.41	54.00	-10.59	AVG
5	5416.000	51.04	5.77	56.81	74.00	-17.19	peak
6	5416.000	38.97	5.77	44.74	54.00	-9.26	AVG
7	5424.000	50.59	5.79	56.38	74.00	-17.62	peak
8	5424.000	40.15	5.79	45.94	54.00	-8.06	AVG
9	5450.400	53.14	5.85	58.99	74.00	-15.01	peak
10	5450.400	40.59	5.85	46.44	54.00	-7.56	AVG
11	5452.800	53.99	5.86	59.85	74.00	-14.15	peak
12	5452.800	41.09	5.86	46.95	54.00	-7.05	AVG
13	5460.000	56.57	5.88	62.45	74.00	-11.55	peak
14	5460.000	44.78	5.88	50.66	54.00	-3.34	AVG
15	5470.000	60.25	5.91	66.16	68.20	-2.04	peak
16	5496.800	99.28	5.97	105.25	--	--	peak
17	5725.000	48.98	6.47	55.45	68.20	-12.75	peak
18	5833.600	50.33	6.72	57.05	68.20	-11.15	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5560 MHz		
Mode:	Mode 13		
Ant.Polar.:	Horizontal		

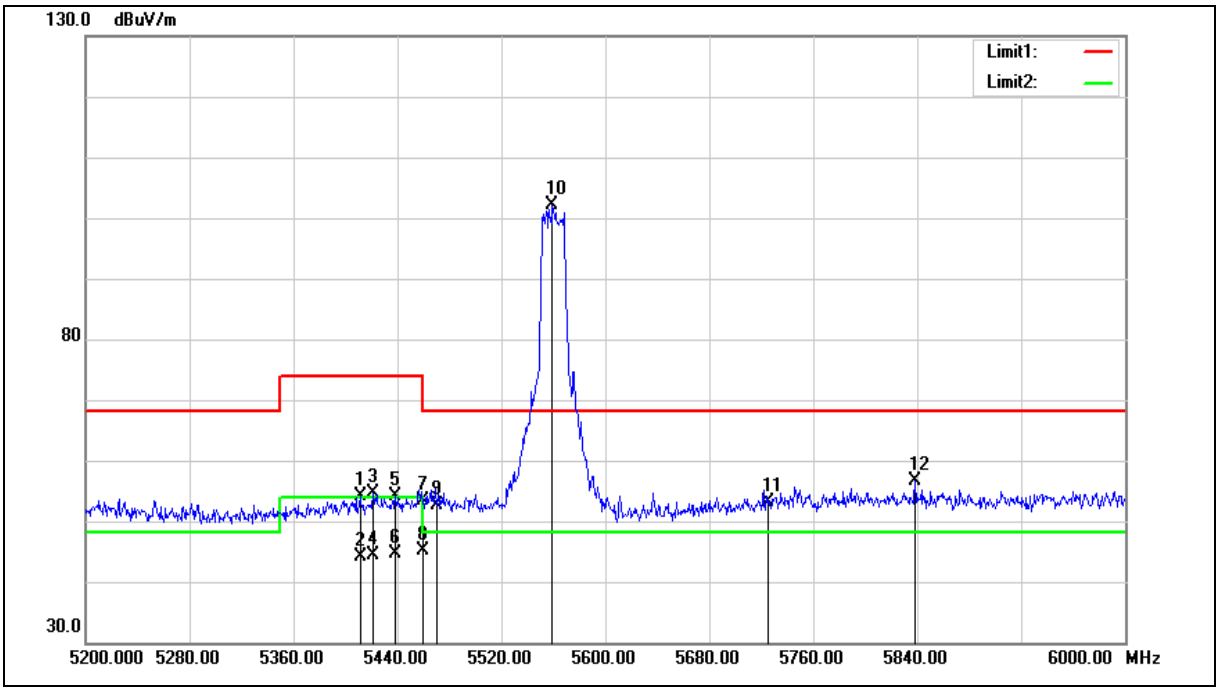

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5560 MHz		
Mode:	Mode 13		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5411.200	48.28	5.76	54.04	74.00	-19.96	peak
2	5411.200	38.41	5.76	44.17	54.00	-9.83	AVG
3	5420.800	48.84	5.79	54.63	74.00	-19.37	peak
4	5420.800	38.63	5.79	44.42	54.00	-9.58	AVG
5	5438.400	48.19	5.82	54.01	74.00	-19.99	peak
6	5438.400	38.81	5.82	44.63	54.00	-9.37	AVG
7	5460.000	47.40	5.88	53.28	74.00	-20.72	peak
8	5460.000	39.18	5.88	45.06	54.00	-8.94	AVG
9	5470.000	46.71	5.91	52.62	68.20	-15.58	peak
10	5559.200	95.90	6.11	102.01	--	--	peak
11	5725.000	46.69	6.47	53.16	68.20	-15.04	peak
12	5838.400	49.95	6.72	56.67	68.20	-11.53	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5560 MHz		
Mode:	Mode 13		
Ant.Polar.:	Vertical		

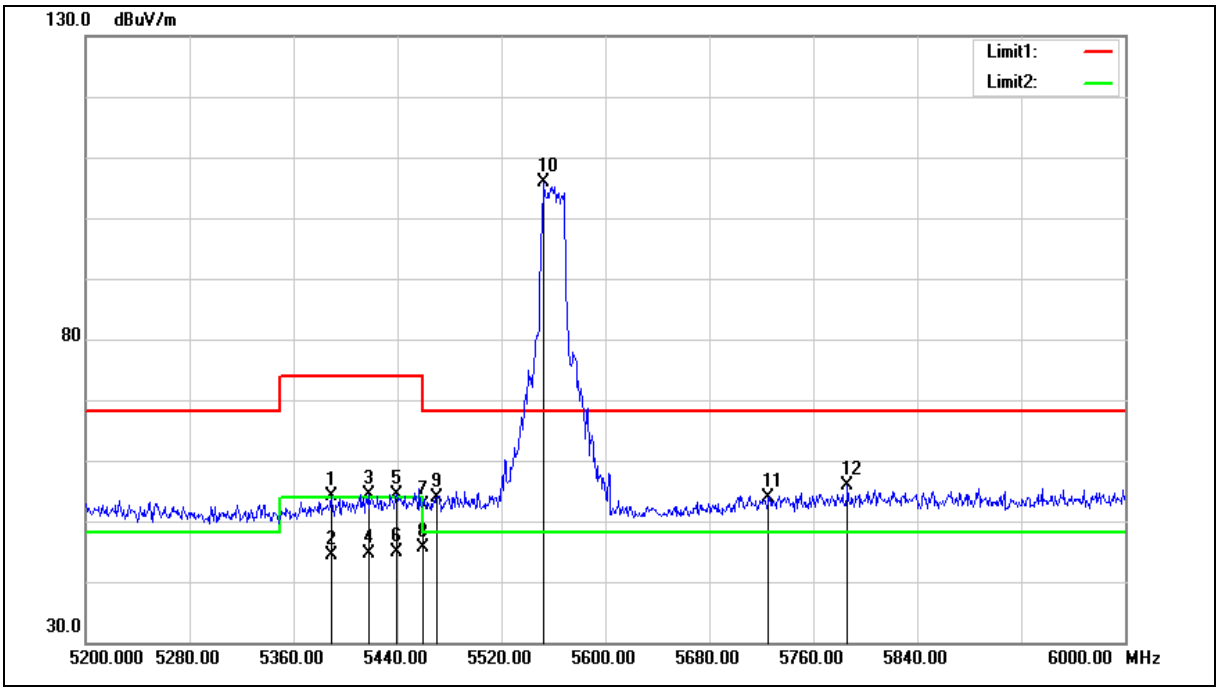

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5560 MHz		
Mode:	Mode 13		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5388.800	48.38	5.70	54.08	74.00	-19.92	peak
2	5388.800	38.57	5.70	44.27	54.00	-9.73	AVG
3	5417.600	48.60	5.77	54.37	74.00	-19.63	peak
4	5417.600	38.82	5.77	44.59	54.00	-9.41	AVG
5	5439.200	48.64	5.82	54.46	74.00	-19.54	peak
6	5439.200	39.06	5.82	44.88	54.00	-9.12	AVG
7	5460.000	46.65	5.88	52.53	74.00	-21.47	peak
8	5460.000	39.74	5.88	45.62	54.00	-8.38	AVG
9	5470.000	47.87	5.91	53.78	68.20	-14.42	peak
10	5552.800	99.73	6.09	105.82	--	--	peak
11	5725.000	47.52	6.47	53.99	68.20	-14.21	peak
12	5786.400	49.30	6.61	55.91	68.20	-12.29	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5700 MHz		
Mode:	Mode 13		
Ant.Polar.:	Horizontal		

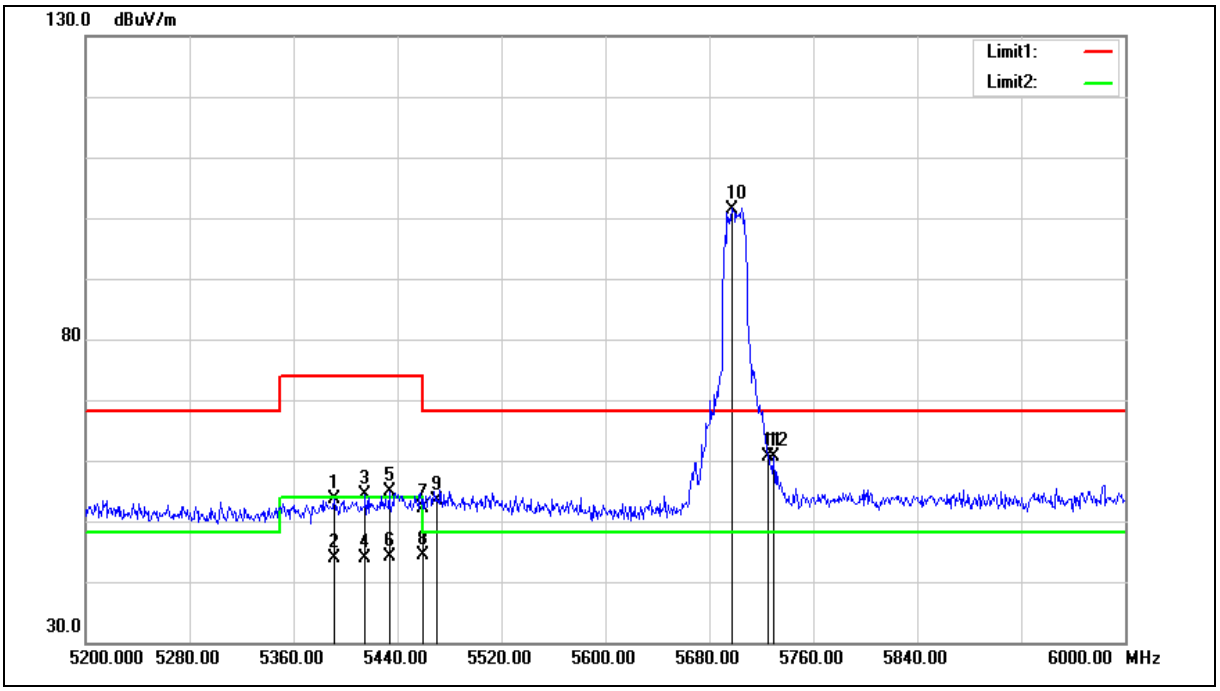

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5700 MHz		
Mode:	Mode 13		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5391.200	47.85	5.70	53.55	74.00	-20.45	peak
2	5391.200	38.11	5.70	43.81	54.00	-10.19	AVG
3	5415.200	48.63	5.77	54.40	74.00	-19.60	peak
4	5415.200	38.18	5.77	43.95	54.00	-10.05	AVG
5	5433.600	49.03	5.81	54.84	74.00	-19.16	peak
6	5433.600	38.39	5.81	44.20	54.00	-9.80	AVG
7	5460.000	46.34	5.88	52.22	74.00	-21.78	peak
8	5460.000	38.49	5.88	44.37	54.00	-9.63	AVG
9	5470.000	47.54	5.91	53.45	68.20	-14.75	peak
10	5697.600	95.08	6.42	101.50	--	--	peak
11	5725.000	54.05	6.47	60.52	68.20	-7.68	peak
12	5729.600	54.23	6.49	60.72	68.20	-7.48	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5700 MHz		
Mode:	Mode 13		
Ant.Polar.:	Vertical		

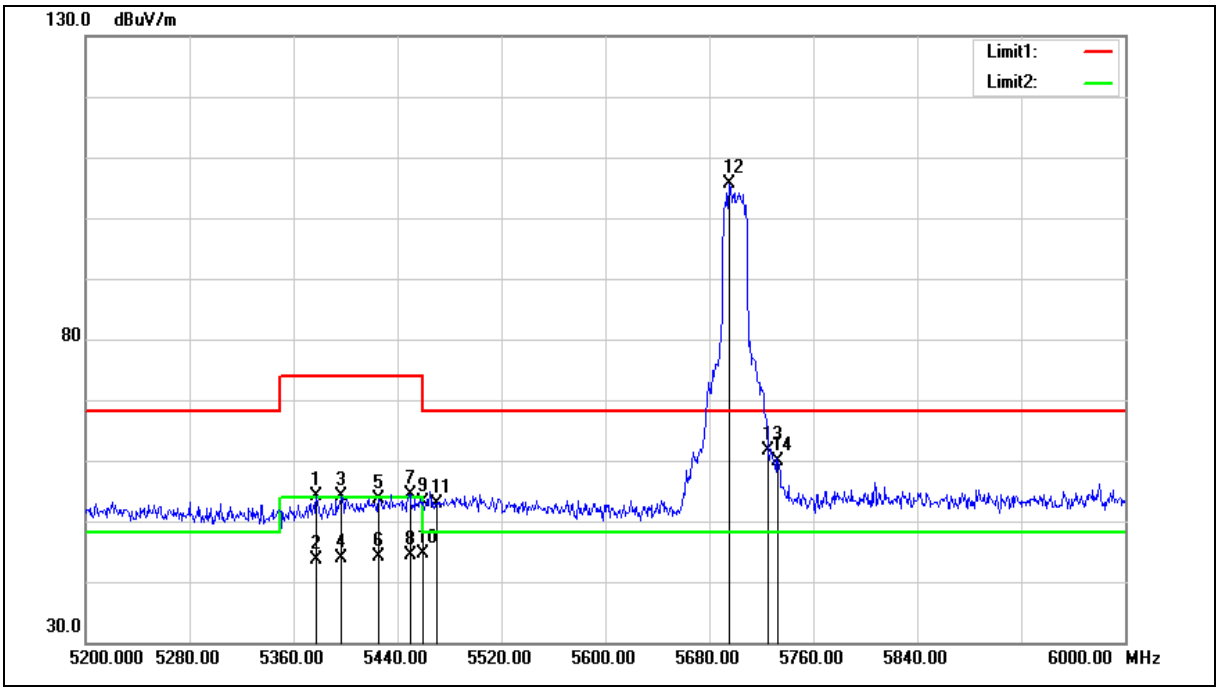

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5700 MHz		
Mode:	Mode 13		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5377.600	48.58	5.67	54.25	74.00	-19.75	peak
2	5377.600	38.03	5.67	43.70	54.00	-10.30	AVG
3	5396.800	48.49	5.72	54.21	74.00	-19.79	peak
4	5396.800	38.26	5.72	43.98	54.00	-10.02	AVG
5	5425.600	47.81	5.80	53.61	74.00	-20.39	peak
6	5425.600	38.38	5.80	44.18	54.00	-9.82	AVG
7	5449.600	48.64	5.85	54.49	74.00	-19.51	peak
8	5449.600	38.47	5.85	44.32	54.00	-9.68	AVG
9	5460.000	47.33	5.88	53.21	74.00	-20.79	peak
10	5460.000	38.67	5.88	44.55	54.00	-9.45	AVG
11	5470.000	46.95	5.91	52.86	68.20	-15.34	peak
12	5695.200	99.15	6.41	105.56	--	--	peak
13	5725.000	55.27	6.47	61.74	68.20	-6.46	peak
14	5732.800	53.45	6.50	59.95	68.20	-8.25	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5745 MHz		
Mode:	Mode 13		
Ant.Polar.:	Horizontal		

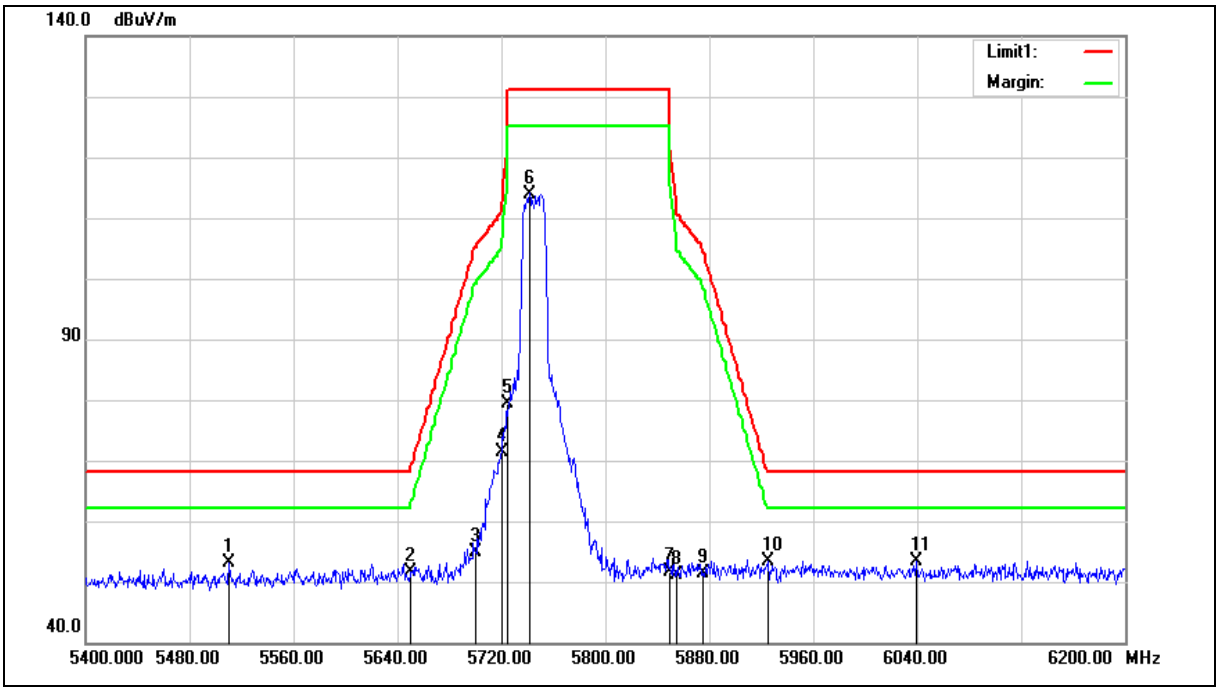

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5745 MHz		
Mode:	Mode 13		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5510.400	53.01	0.24	53.25	68.20	-14.95	peak
2	5650.000	50.91	0.62	51.53	68.20	-16.67	peak
3	5700.000	54.07	0.75	54.82	105.20	-50.38	peak
4	5720.000	70.59	0.81	71.40	110.80	-39.40	peak
5	5725.000	78.60	0.82	79.42	122.20	-42.78	peak
6	5741.600	113.00	0.87	113.87	--	--	peak
7	5850.000	50.50	1.17	51.67	122.20	-70.53	peak
8	5855.000	49.88	1.18	51.06	110.80	-59.74	peak
9	5875.000	50.06	1.23	51.29	105.20	-53.91	peak
10	5925.000	51.98	1.37	53.35	68.20	-14.85	peak
11	6039.200	51.76	1.71	53.47	68.20	-14.73	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5745 MHz		
Mode:	Mode 13		
Ant.Polar.:	Vertical		

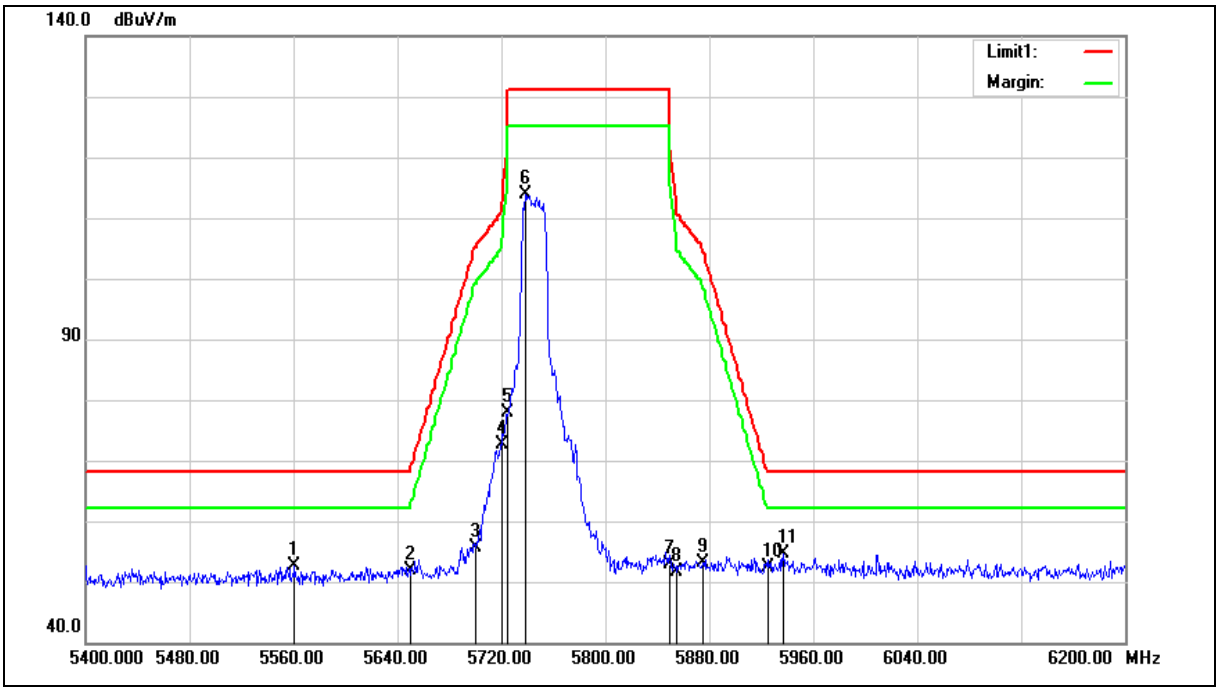

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5745 MHz		
Mode:	Mode 13		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5560.800	52.29	0.39	52.68	68.20	-15.52	peak
2	5650.000	51.38	0.62	52.00	68.20	-16.20	peak
3	5700.000	54.97	0.75	55.72	105.20	-49.48	peak
4	5720.000	71.76	0.81	72.57	110.80	-38.23	peak
5	5725.000	77.15	0.82	77.97	122.20	-44.23	peak
6	5738.400	112.96	0.86	113.82	--	--	peak
7	5850.000	51.65	1.17	52.82	122.20	-69.38	peak
8	5855.000	50.50	1.18	51.68	110.80	-59.12	peak
9	5875.000	51.88	1.23	53.11	105.20	-52.09	peak
10	5925.000	51.00	1.37	52.37	68.20	-15.83	peak
11	5936.800	53.27	1.40	54.67	68.20	-13.53	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5785 MHz		
Mode:	Mode 13		
Ant.Polar.:	Horizontal		

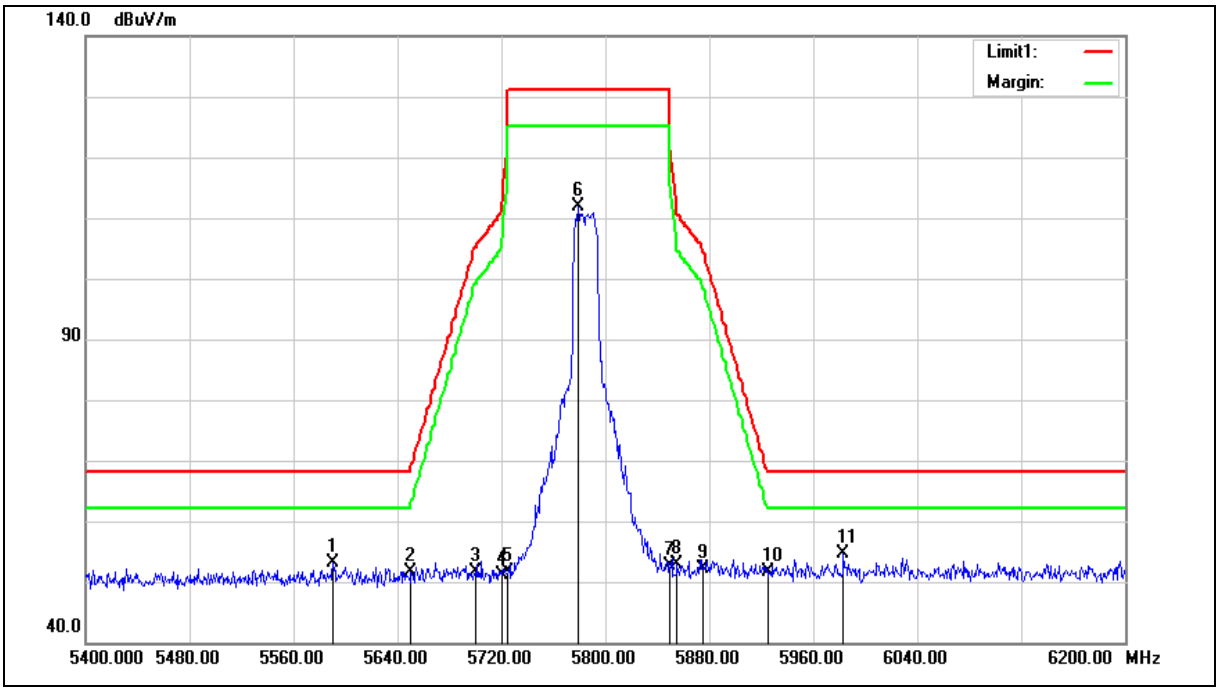

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5785 MHz		
Mode:	Mode 13		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5590.400	52.64	0.46	53.10	68.20	-15.10	peak
2	5650.000	50.96	0.62	51.58	68.20	-16.62	peak
3	5700.000	50.98	0.75	51.73	105.20	-53.47	peak
4	5720.000	50.20	0.81	51.01	110.80	-59.79	peak
5	5725.000	50.89	0.82	51.71	122.20	-70.49	peak
6	5779.200	110.81	0.98	111.79	--	--	peak
7	5850.000	51.37	1.17	52.54	122.20	-69.66	peak
8	5855.000	51.79	1.18	52.97	110.80	-57.83	peak
9	5875.000	50.82	1.23	52.05	105.20	-53.15	peak
10	5925.000	50.32	1.37	51.69	68.20	-16.51	peak
11	5983.200	53.11	1.52	54.63	68.20	-13.57	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5785 MHz		
Mode:	Mode 13		
Ant.Polar.:	Vertical		

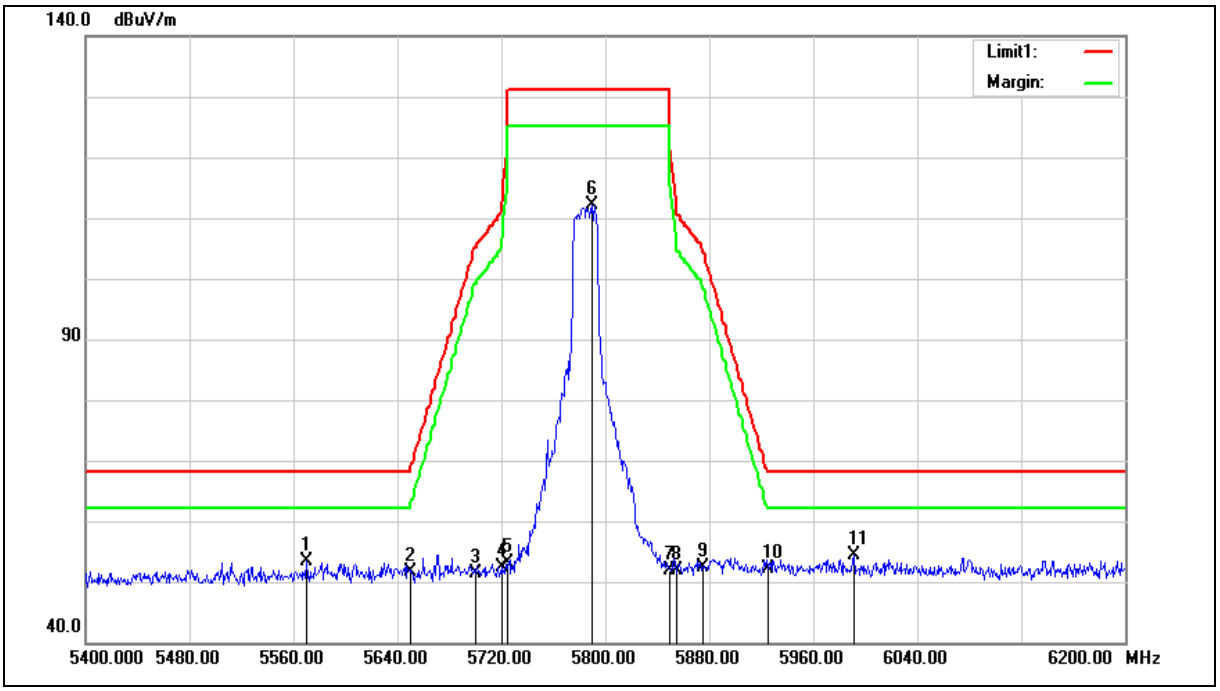

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5785 MHz		
Mode:	Mode 13		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5569.600	52.97	0.40	53.37	68.20	-14.83	peak
2	5650.000	50.93	0.62	51.55	68.20	-16.65	peak
3	5700.000	50.62	0.75	51.37	105.20	-53.83	peak
4	5720.000	51.51	0.81	52.32	110.80	-58.48	peak
5	5725.000	52.24	0.82	53.06	122.20	-69.14	peak
6	5789.600	111.03	0.99	112.02	--	--	peak
7	5850.000	50.60	1.17	51.77	122.20	-70.43	peak
8	5855.000	50.64	1.18	51.82	110.80	-58.98	peak
9	5875.000	51.04	1.23	52.27	105.20	-52.93	peak
10	5925.000	50.88	1.37	52.25	68.20	-15.95	peak
11	5991.200	52.85	1.55	54.40	68.20	-13.80	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5825 MHz		
Mode:	Mode 13		
Ant.Polar.:	Horizontal		

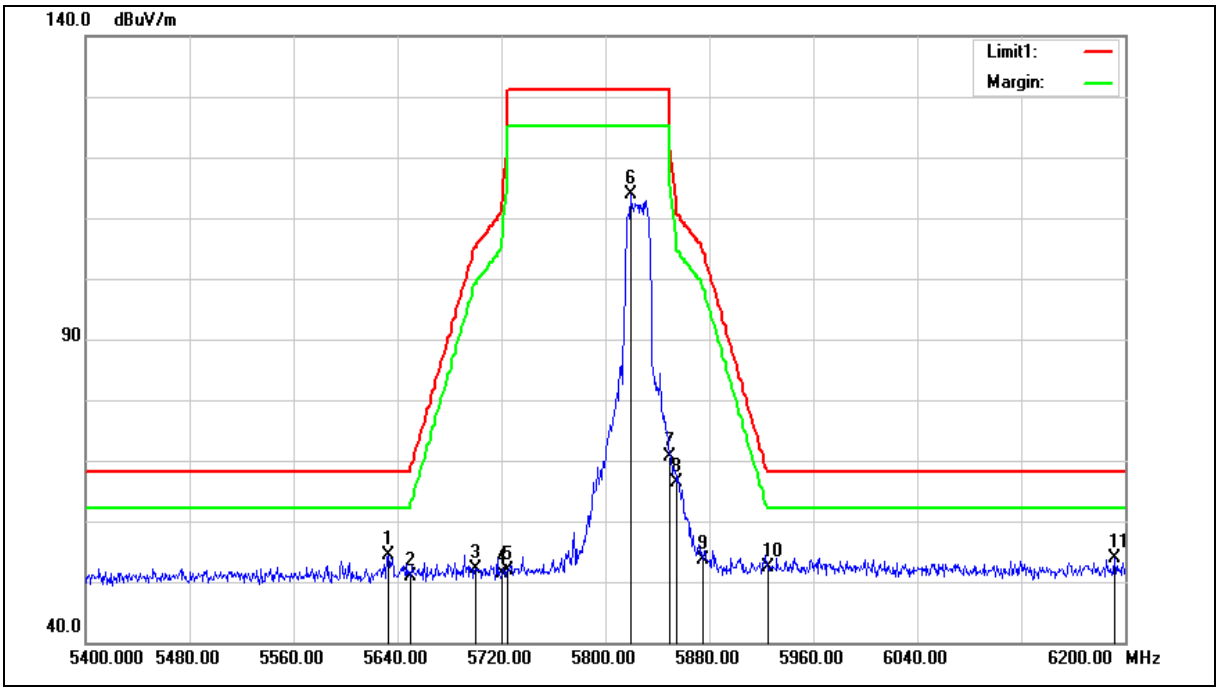

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5825 MHz		
Mode:	Mode 13		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5632.800	53.88	0.58	54.46	68.20	-13.74	peak
2	5650.000	50.29	0.62	50.91	68.20	-17.29	peak
3	5700.000	51.38	0.75	52.13	105.20	-53.07	peak
4	5720.000	50.54	0.81	51.35	110.80	-59.45	peak
5	5725.000	51.03	0.82	51.85	122.20	-70.35	peak
6	5819.200	112.73	1.08	113.81	--	--	peak
7	5850.000	69.55	1.17	70.72	122.20	-51.48	peak
8	5855.000	65.28	1.18	66.46	110.80	-44.34	peak
9	5875.000	52.38	1.23	53.61	105.20	-51.59	peak
10	5925.000	50.91	1.37	52.28	68.20	-15.92	peak
11	6192.000	51.66	2.25	53.91	68.20	-14.29	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5825 MHz		
Mode:	Mode 13		
Ant.Polar.:	Vertical		

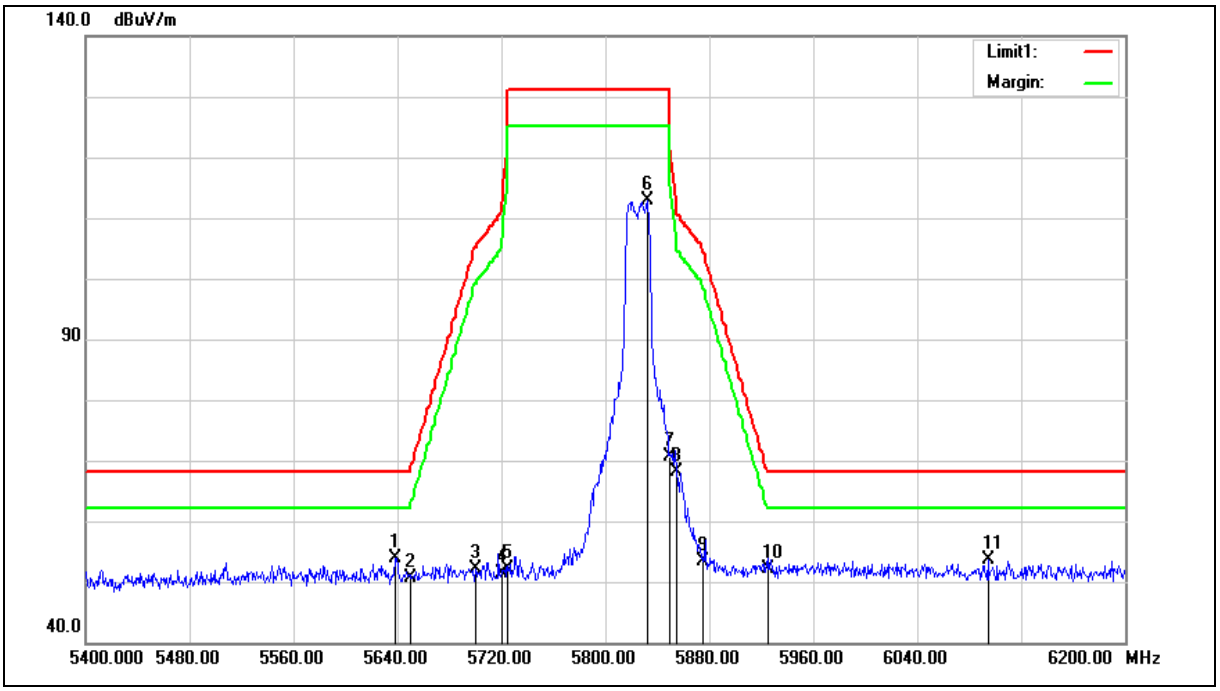

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5825 MHz		
Mode:	Mode 13		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5638.400	53.24	0.59	53.83	68.20	-14.37	peak
2	5650.000	50.05	0.62	50.67	68.20	-17.53	peak
3	5700.000	51.40	0.75	52.15	105.20	-53.05	peak
4	5720.000	50.67	0.81	51.48	110.80	-59.32	peak
5	5725.000	51.35	0.82	52.17	122.20	-70.03	peak
6	5832.000	111.75	1.11	112.86	--	--	peak
7	5850.000	69.58	1.17	70.75	122.20	-51.45	peak
8	5855.000	67.04	1.18	68.22	110.80	-42.58	peak
9	5875.000	52.05	1.23	53.28	105.20	-51.92	peak
10	5925.000	50.76	1.37	52.13	68.20	-16.07	peak
11	6094.400	51.60	1.91	53.51	68.20	-14.69	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5190 MHz		
Mode:	Mode 14		
Ant.Polar.:	Horizontal		

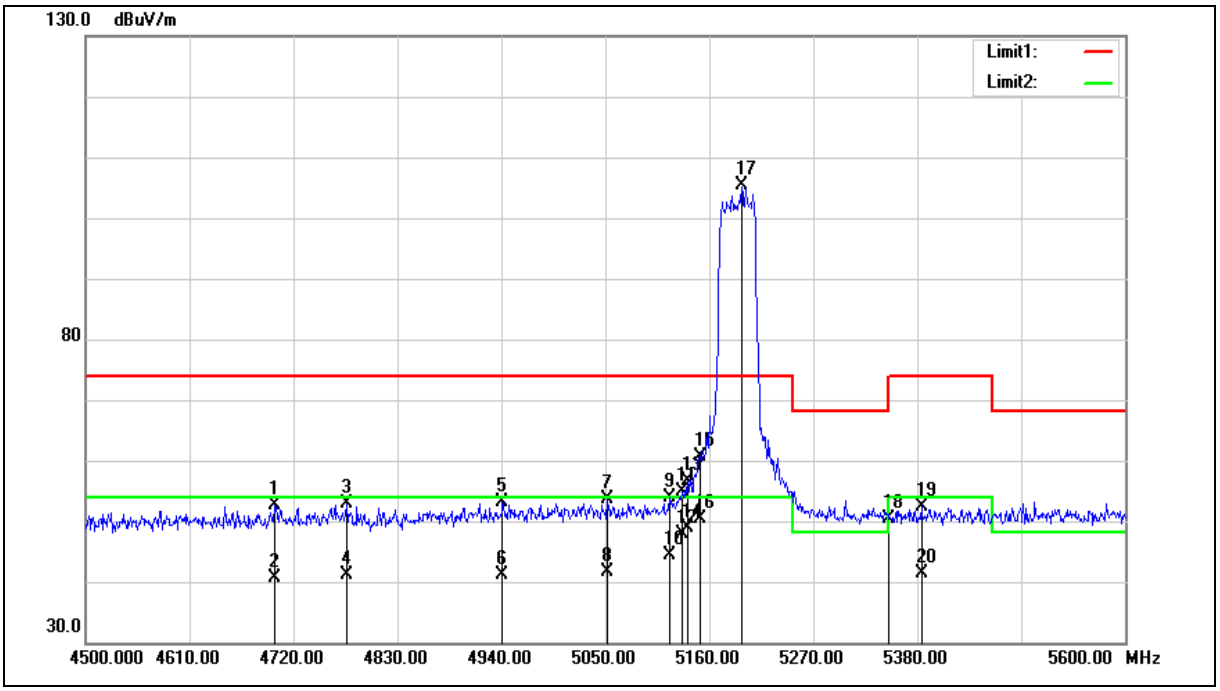

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5190 MHz		
Mode:	Mode 14		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4700.200	54.32	-1.59	52.73	74.00	-21.27	peak
2	4700.200	42.17	-1.59	40.58	54.00	-13.42	AVG
3	4776.100	54.17	-1.39	52.78	74.00	-21.22	peak
4	4776.100	42.61	-1.39	41.22	54.00	-12.78	AVG
5	4941.100	54.11	-0.94	53.17	74.00	-20.83	peak
6	4941.100	42.11	-0.94	41.17	54.00	-12.83	AVG
7	5052.200	54.17	-0.66	53.51	74.00	-20.49	peak
8	5052.200	42.25	-0.66	41.59	54.00	-12.41	AVG
9	5118.200	54.54	-0.54	54.00	74.00	-20.00	peak
10	5118.200	45.04	-0.54	44.50	54.00	-9.50	AVG
11	5131.400	55.38	-0.51	54.87	74.00	-19.13	peak
12	5131.400	48.46	-0.51	47.95	54.00	-6.05	AVG
13	5136.900	57.05	-0.50	56.55	74.00	-17.45	peak
14	5136.900	49.27	-0.50	48.77	54.00	-5.23	AVG
15	5150.000	61.12	-0.48	60.64	74.00	-13.36	peak
16	5150.000	50.79	-0.48	50.31	54.00	-3.69	AVG
17	5194.100	105.66	-0.39	105.27	--	--	peak
18	5350.000	50.58	-0.08	50.50	74.00	-23.50	peak
19	5384.400	52.28	-0.01	52.27	74.00	-21.73	peak
20	5384.400	41.28	-0.01	41.27	54.00	-12.73	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5190 MHz		
Mode:	Mode 14		
Ant.Polar.:	Vertical		

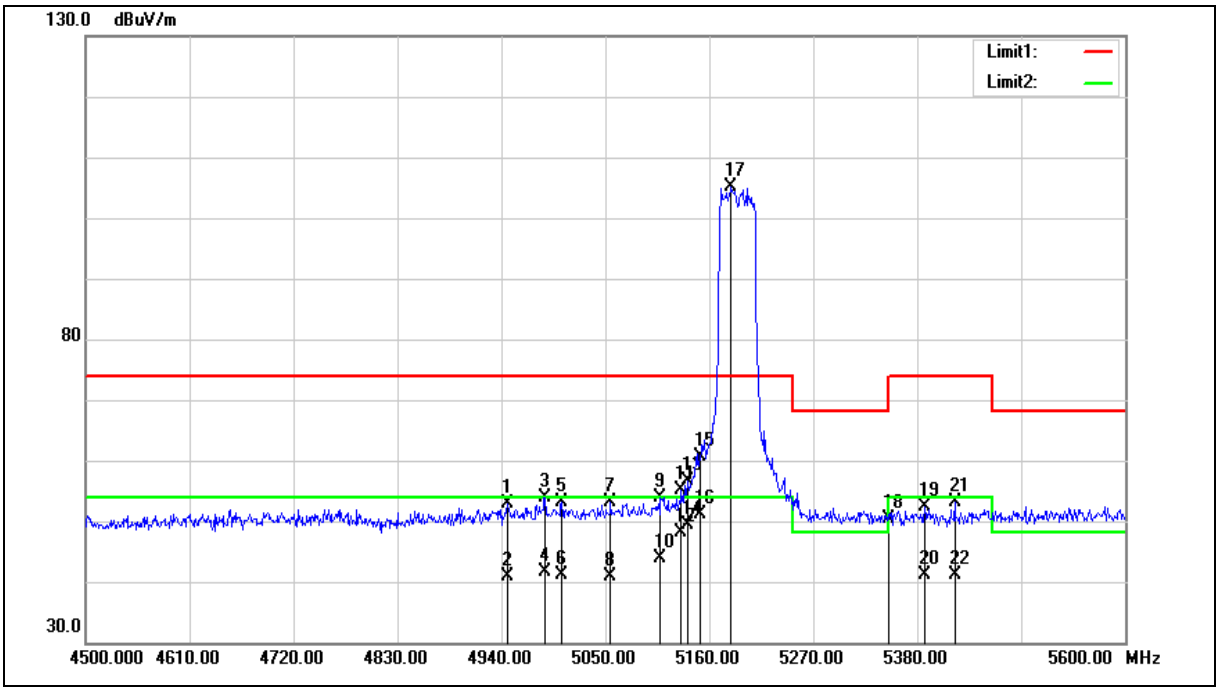

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5190 MHz		
Mode:	Mode 14		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4946.600	53.90	-0.93	52.97	74.00	-21.03	peak
2	4946.600	41.85	-0.93	40.92	54.00	-13.08	AVG
3	4986.200	54.77	-0.81	53.96	74.00	-20.04	peak
4	4986.200	42.32	-0.81	41.51	54.00	-12.49	AVG
5	5003.800	53.97	-0.77	53.20	74.00	-20.80	peak
6	5003.800	42.01	-0.77	41.24	54.00	-12.76	AVG
7	5055.500	53.88	-0.66	53.22	74.00	-20.78	peak
8	5055.500	41.65	-0.66	40.99	54.00	-13.01	AVG
9	5108.300	54.48	-0.56	53.92	74.00	-20.08	peak
10	5108.300	44.47	-0.56	43.91	54.00	-10.09	AVG
11	5130.300	55.72	-0.52	55.20	74.00	-18.80	peak
12	5130.300	48.54	-0.52	48.02	54.00	-5.98	AVG
13	5136.900	57.09	-0.50	56.59	74.00	-17.41	peak
14	5136.900	49.92	-0.50	49.42	54.00	-4.58	AVG
15	5150.000	61.16	-0.48	60.68	74.00	-13.32	peak
16	5150.000	51.52	-0.48	51.04	54.00	-2.96	AVG
17	5183.100	105.52	-0.40	105.12	--	--	peak
18	5350.000	50.38	-0.08	50.30	74.00	-23.70	peak
19	5387.700	52.27	0.00	52.27	74.00	-21.73	peak
20	5387.700	41.19	0.00	41.19	54.00	-12.81	AVG
21	5419.600	53.02	0.06	53.08	74.00	-20.92	peak
22	5419.600	41.01	0.06	41.07	54.00	-12.93	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5230 MHz		
Mode:	Mode 14		
Ant.Polar.:	Horizontal		

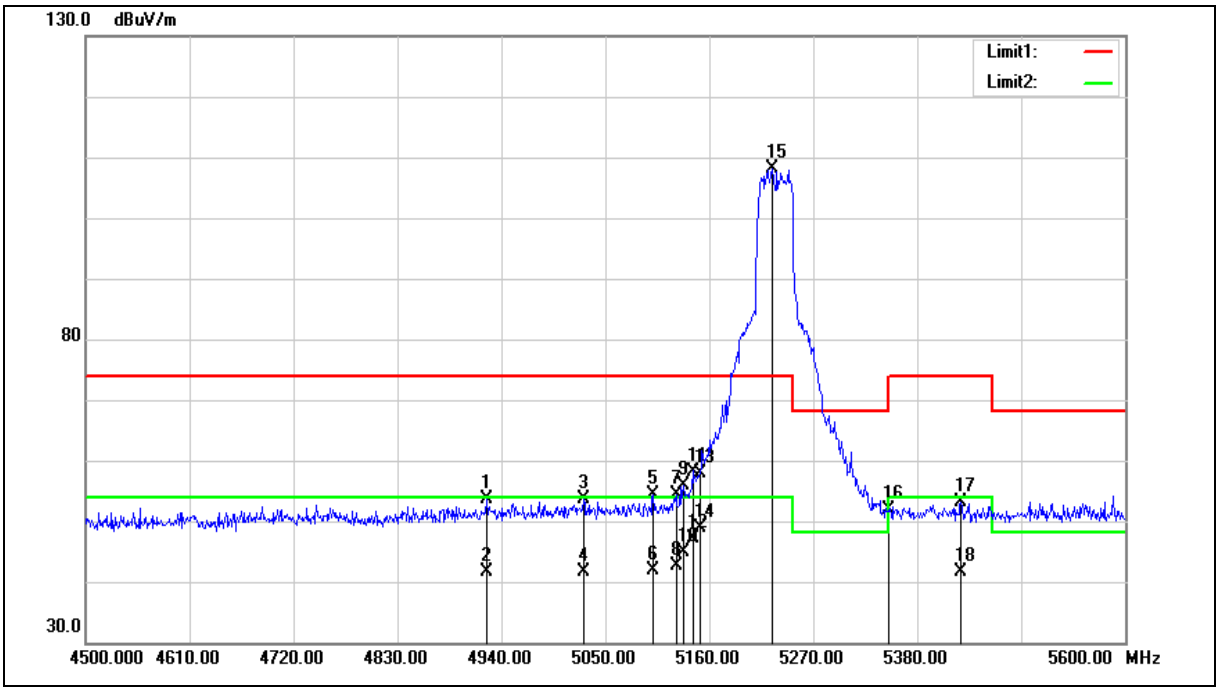

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5230 MHz		
Mode:	Mode 14		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4924.600	54.53	-0.99	53.54	74.00	-20.46	peak
2	4924.600	42.64	-0.99	41.65	54.00	-12.35	AVG
3	5026.900	54.24	-0.72	53.52	74.00	-20.48	peak
4	5026.900	42.26	-0.72	41.54	54.00	-12.46	AVG
5	5100.600	55.06	-0.57	54.49	74.00	-19.51	peak
6	5100.600	42.49	-0.57	41.92	54.00	-12.08	AVG
7	5124.800	54.94	-0.52	54.42	74.00	-19.58	peak
8	5124.800	43.14	-0.52	42.62	54.00	-11.38	AVG
9	5132.500	56.42	-0.51	55.91	74.00	-18.09	peak
10	5132.500	45.47	-0.51	44.96	54.00	-9.04	AVG
11	5142.400	58.74	-0.49	58.25	74.00	-15.75	peak
12	5142.400	47.66	-0.49	47.17	54.00	-6.83	AVG
13	5150.000	58.32	-0.48	57.84	74.00	-16.16	peak
14	5150.000	49.31	-0.48	48.83	54.00	-5.17	AVG
15	5227.100	108.34	-0.32	108.02	--	--	peak
16	5350.000	51.93	-0.08	51.85	74.00	-22.15	peak
17	5426.200	53.08	0.06	53.14	74.00	-20.86	peak
18	5426.200	41.63	0.06	41.69	54.00	-12.31	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5230 MHz		
Mode:	Mode 14		
Ant.Polar.:	Vertical		

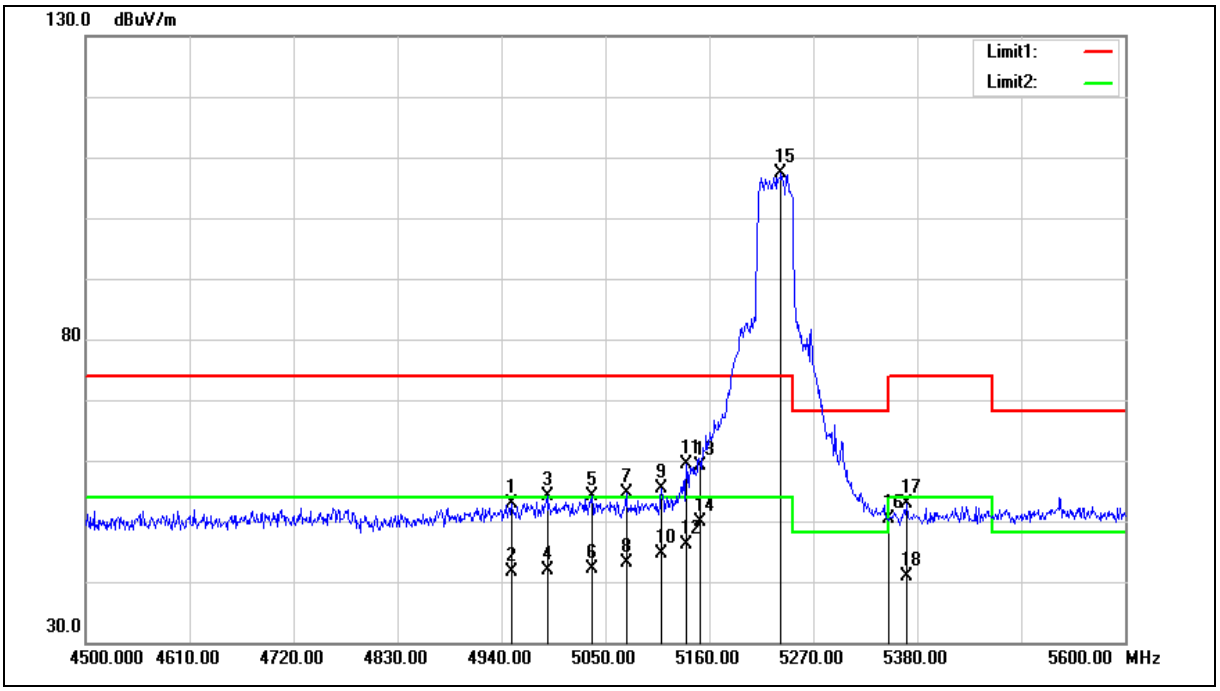

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5230 MHz		
Mode:	Mode 14		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4951.000	53.68	-0.90	52.78	74.00	-21.22	peak
2	4951.000	42.41	-0.90	41.51	54.00	-12.49	AVG
3	4988.400	54.87	-0.81	54.06	74.00	-19.94	peak
4	4988.400	42.57	-0.81	41.76	54.00	-12.24	AVG
5	5035.700	54.92	-0.70	54.22	74.00	-19.78	peak
6	5035.700	42.93	-0.70	42.23	54.00	-11.77	AVG
7	5072.000	55.36	-0.63	54.73	74.00	-19.27	peak
8	5072.000	43.79	-0.63	43.16	54.00	-10.84	AVG
9	5109.400	55.87	-0.55	55.32	74.00	-18.68	peak
10	5109.400	45.29	-0.55	44.74	54.00	-9.26	AVG
11	5135.800	59.93	-0.50	59.43	74.00	-14.57	peak
12	5135.800	46.61	-0.50	46.11	54.00	-7.89	AVG
13	5150.000	59.64	-0.48	59.16	74.00	-14.84	peak
14	5150.000	50.25	-0.48	49.77	54.00	-4.23	AVG
15	5235.900	107.75	-0.31	107.44	--	--	peak
16	5350.000	50.49	-0.08	50.41	74.00	-23.59	peak
17	5369.000	52.89	-0.04	52.85	74.00	-21.15	peak
18	5369.000	40.83	-0.04	40.79	54.00	-13.21	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5270 MHz		
Mode:	Mode 14		
Ant.Polar.:	Horizontal		

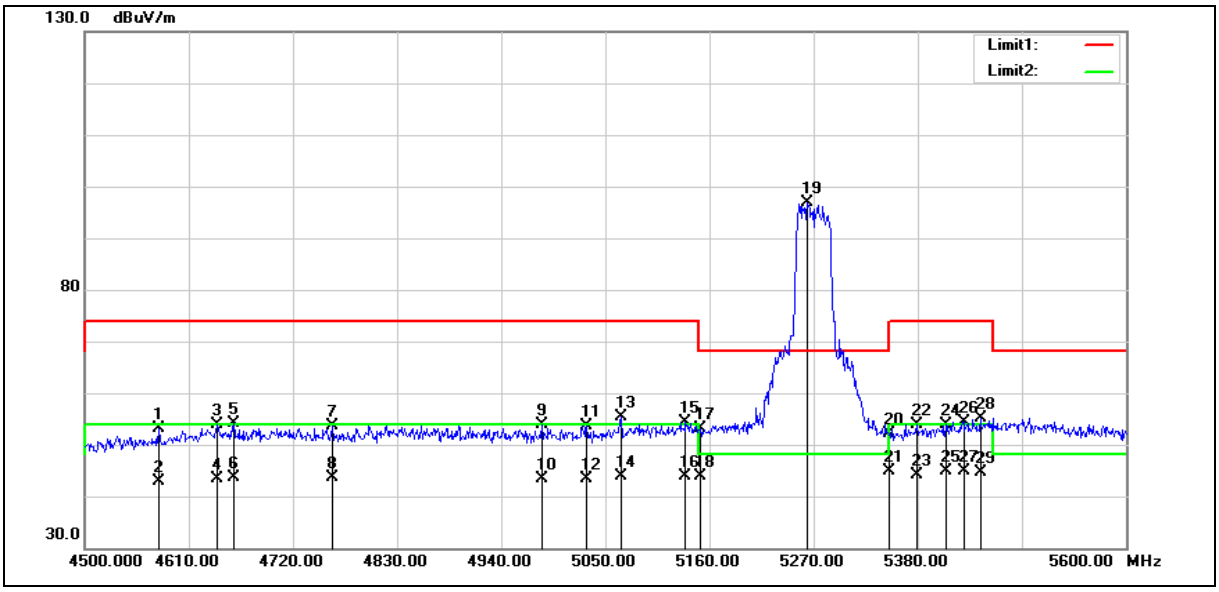

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5270 MHz		
Mode:	Mode 14		
Ant.Polar.:	Horizontal		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4578.100	49.37	3.67	53.04	74.00	-20.96	peak
2	4578.100	39.31	3.67	42.98	54.00	-11.02	AVG
3	4639.700	49.99	3.83	53.82	74.00	-20.18	peak
4	4639.700	39.50	3.83	43.33	54.00	-10.67	AVG
5	4657.300	50.31	3.88	54.19	74.00	-19.81	peak
6	4657.300	39.84	3.88	43.72	54.00	-10.28	AVG
7	4761.800	49.55	4.14	53.69	74.00	-20.31	peak
8	4761.800	39.39	4.14	43.53	54.00	-10.47	AVG
9	4982.900	49.24	4.71	53.95	74.00	-20.05	peak
10	4982.900	38.69	4.71	43.40	54.00	-10.60	AVG
11	5030.200	48.84	4.82	53.66	74.00	-20.34	peak
12	5030.200	38.68	4.82	43.50	54.00	-10.50	AVG
13	5066.500	50.41	4.91	55.32	74.00	-18.68	peak
14	5066.500	39.07	4.91	43.98	54.00	-10.02	AVG
15	5134.700	49.37	5.08	54.45	74.00	-19.55	peak
16	5134.700	38.68	5.08	43.76	54.00	-10.24	AVG
17	5150.000	48.02	5.12	53.14	74.00	-20.86	peak
18	5150.000	38.80	5.12	43.92	54.00	-10.08	AVG
19	5263.400	91.37	5.39	96.76	--	--	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5270 MHz		
Mode:	Mode 14		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
21	5350.000	39.24	5.61	44.85	54.00	-9.15	AVG
22	5378.900	48.16	5.67	53.83	74.00	-20.17	peak
23	5378.900	38.50	5.67	44.17	54.00	-9.83	AVG
24	5409.700	48.03	5.76	53.79	74.00	-20.21	peak
25	5409.700	39.00	5.76	44.76	54.00	-9.24	AVG
26	5428.400	48.64	5.80	54.44	74.00	-19.56	peak
27	5428.400	39.03	5.80	44.83	54.00	-9.17	AVG
28	5446.000	49.19	5.84	55.03	74.00	-18.97	peak
29	5446.000	38.76	5.84	44.60	54.00	-9.40	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5270 MHz		
Mode:	Mode 14		
Ant.Polar.:	Vertical		

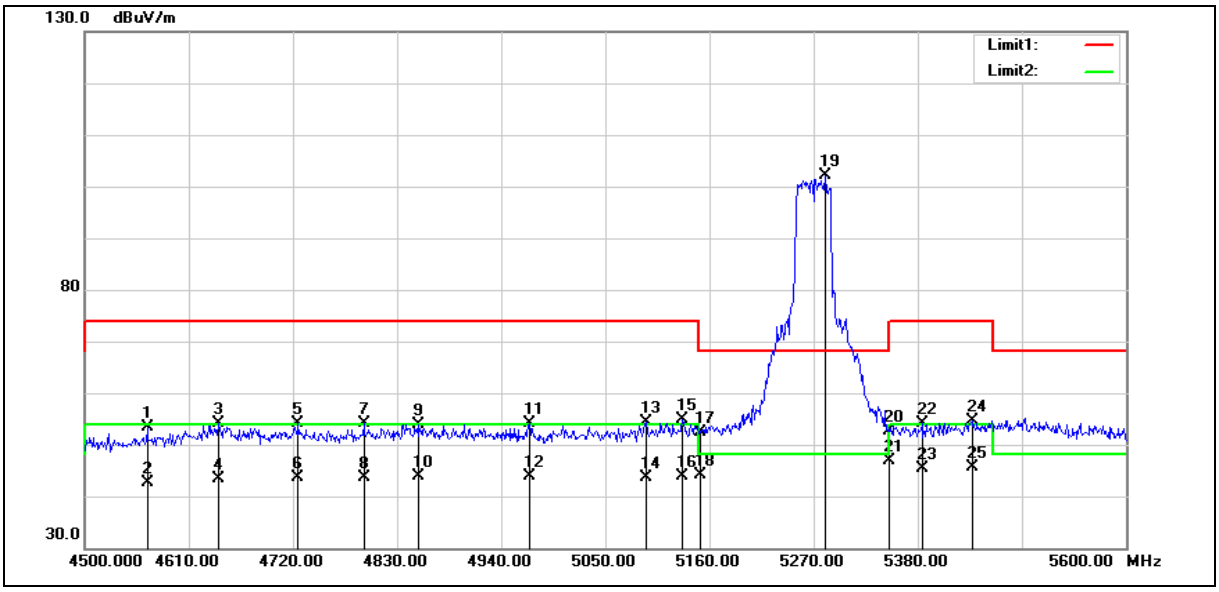

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5270 MHz		
Mode:	Mode 14		
Ant.Polar.:	Vertical		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4566.000	49.61	3.66	53.27	74.00	-20.73	peak
2	4566.000	38.97	3.66	42.63	54.00	-11.37	AVG
3	4641.900	50.27	3.84	54.11	74.00	-19.89	peak
4	4641.900	39.55	3.84	43.39	54.00	-10.61	AVG
5	4725.500	50.03	4.05	54.08	74.00	-19.92	peak
6	4725.500	39.63	4.05	43.68	54.00	-10.32	AVG
7	4794.800	49.87	4.23	54.10	74.00	-19.90	peak
8	4794.800	39.50	4.23	43.73	54.00	-10.27	AVG
9	4852.000	49.60	4.37	53.97	74.00	-20.03	peak
10	4852.000	39.55	4.37	43.92	54.00	-10.08	AVG
11	4969.700	49.46	4.67	54.13	74.00	-19.87	peak
12	4969.700	39.09	4.67	43.76	54.00	-10.24	AVG
13	5092.900	49.31	4.98	54.29	74.00	-19.71	peak
14	5092.900	38.61	4.98	43.59	54.00	-10.41	AVG
15	5131.400	49.92	5.08	55.00	74.00	-19.00	peak
16	5131.400	38.80	5.08	43.88	54.00	-10.12	AVG
17	5150.000	47.32	5.12	52.44	74.00	-21.56	peak
18	5150.000	39.10	5.12	44.22	54.00	-9.78	AVG
19	5282.100	96.59	5.45	102.04	--	--	peak
20	5350.000	47.07	5.61	52.68	74.00	-21.32	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5270 MHz		
Mode:	Mode 14		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
21	5350.000	41.36	5.61	46.97	54.00	-7.03	AVG
22	5384.400	48.53	5.69	54.22	74.00	-19.78	peak
23	5384.400	39.59	5.69	45.28	54.00	-8.72	AVG
24	5437.200	48.91	5.82	54.73	74.00	-19.27	peak
25	5437.200	39.87	5.82	45.69	54.00	-8.31	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5310 MHz		
Mode:	Mode 14		
Ant.Polar.:	Horizontal		

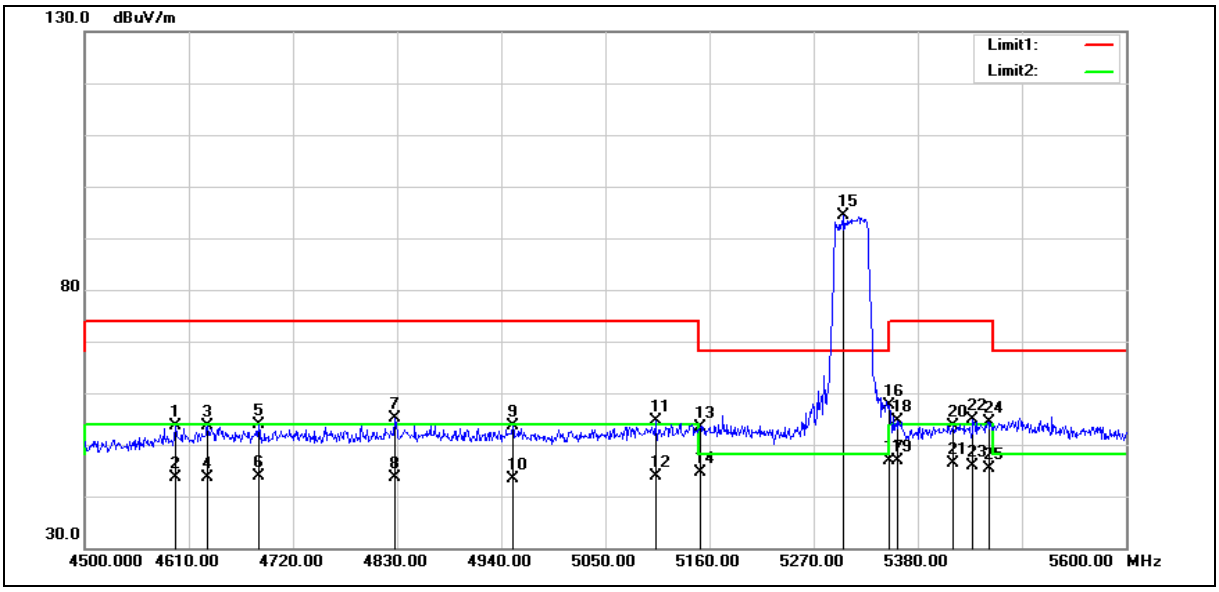

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5310 MHz		
Mode:	Mode 14		
Ant.Polar.:	Horizontal		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4595.700	49.85	3.72	53.57	74.00	-20.43	peak
2	4595.700	39.94	3.72	43.66	54.00	-10.34	AVG
3	4629.800	49.71	3.81	53.52	74.00	-20.48	peak
4	4629.800	39.89	3.81	43.70	54.00	-10.30	AVG
5	4683.700	49.96	3.94	53.90	74.00	-20.10	peak
6	4683.700	39.99	3.94	43.93	54.00	-10.07	AVG
7	4827.800	50.75	4.31	55.06	74.00	-18.94	peak
8	4827.800	39.38	4.31	43.69	54.00	-10.31	AVG
9	4952.100	49.03	4.63	53.66	74.00	-20.34	peak
10	4952.100	38.78	4.63	43.41	54.00	-10.59	AVG
11	5102.800	49.51	5.00	54.51	74.00	-19.49	peak
12	5102.800	38.95	5.00	43.95	54.00	-10.05	AVG
13	5150.000	48.22	5.12	53.34	74.00	-20.66	peak
14	5150.000	39.59	5.12	44.71	54.00	-9.29	AVG
15	5301.900	88.84	5.48	94.32	--	--	peak
16	5350.000	52.03	5.61	57.64	74.00	-16.36	peak
17	5350.000	41.24	5.61	46.85	54.00	-7.15	AVG
18	5358.000	48.88	5.63	54.51	74.00	-19.49	peak
19	5358.000	41.20	5.63	46.83	54.00	-7.17	AVG
20	5417.400	47.86	5.77	53.63	74.00	-20.37	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5310 MHz		
Mode:	Mode 14		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
21	5417.400	40.61	5.77	46.38	54.00	-7.62	AVG
22	5438.300	49.01	5.82	54.83	74.00	-19.17	peak
23	5438.300	40.15	5.82	45.97	54.00	-8.03	AVG
24	5454.800	48.60	5.86	54.46	74.00	-19.54	peak
25	5454.800	39.51	5.86	45.37	54.00	-8.63	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5310 MHz		
Mode:	Mode 14		
Ant.Polar.:	Vertical		

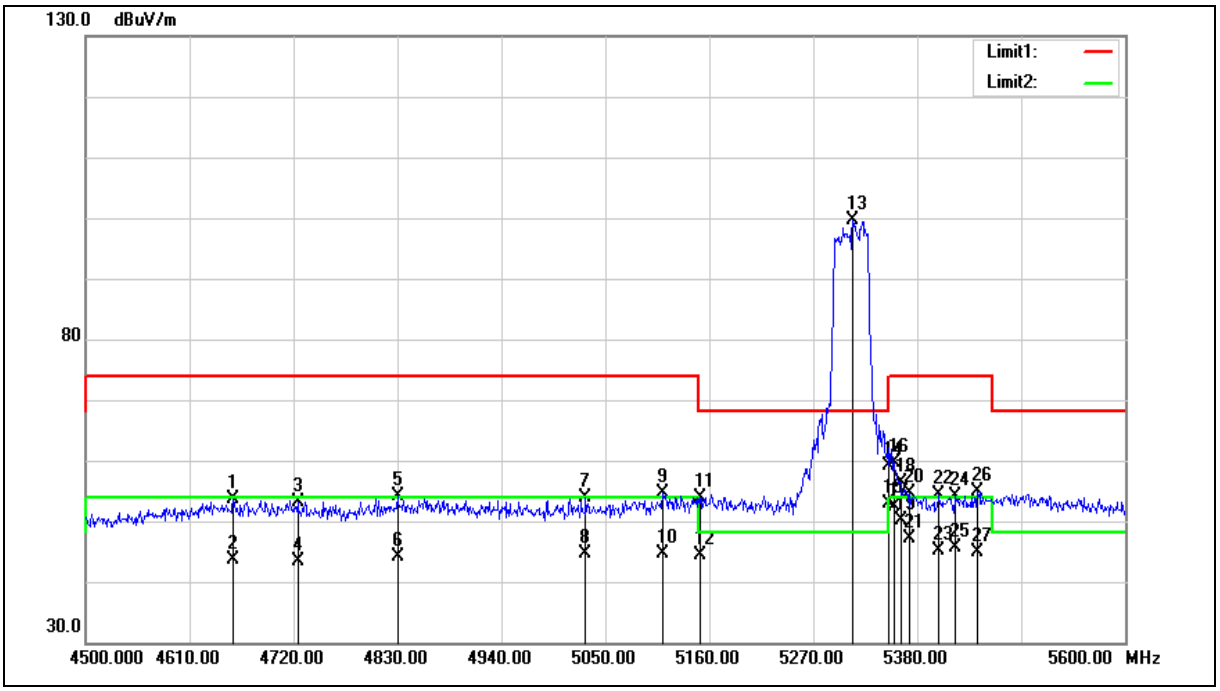

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5310 MHz		
Mode:	Mode 14		
Ant.Polar.:	Vertical		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4656.200	49.79	3.88	53.67	74.00	-20.33	peak
2	4656.200	39.63	3.88	43.51	54.00	-10.49	AVG
3	4724.400	49.13	4.05	53.18	74.00	-20.82	peak
4	4724.400	39.37	4.05	43.42	54.00	-10.58	AVG
5	4830.000	49.87	4.32	54.19	74.00	-19.81	peak
6	4830.000	39.77	4.32	44.09	54.00	-9.91	AVG
7	5029.100	48.98	4.82	53.80	74.00	-20.20	peak
8	5029.100	39.82	4.82	44.64	54.00	-9.36	AVG
9	5110.500	49.70	5.02	54.72	74.00	-19.28	peak
10	5110.500	39.72	5.02	44.74	54.00	-9.26	AVG
11	5150.000	48.67	5.12	53.79	74.00	-20.21	peak
12	5150.000	39.34	5.12	44.46	54.00	-9.54	AVG
13	5311.800	94.07	5.51	99.58	--	--	peak
14	5350.000	53.40	5.61	59.01	74.00	-14.99	peak
15	5350.000	47.32	5.61	52.93	54.00	-1.07	AVG
16	5355.800	54.00	5.62	59.62	74.00	-14.38	peak
17	5355.800	46.78	5.62	52.40	54.00	-1.60	AVG
18	5362.400	50.84	5.64	56.48	74.00	-17.52	peak
19	5362.400	44.60	5.64	50.24	54.00	-3.76	AVG
20	5372.300	48.98	5.66	54.64	74.00	-19.36	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5310 MHz		
Mode:	Mode 14		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
21	5372.300	41.51	5.66	47.17	54.00	-6.83	AVG
22	5403.100	48.67	5.74	54.41	74.00	-19.59	peak
23	5403.100	39.48	5.74	45.22	54.00	-8.78	AVG
24	5419.600	48.22	5.79	54.01	74.00	-19.99	peak
25	5419.600	39.79	5.79	45.58	54.00	-8.42	AVG
26	5443.800	49.01	5.84	54.85	74.00	-19.15	peak
27	5443.800	39.09	5.84	44.93	54.00	-9.07	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5510 MHz		
Mode:	Mode 14		
Ant.Polar.:	Horizontal		

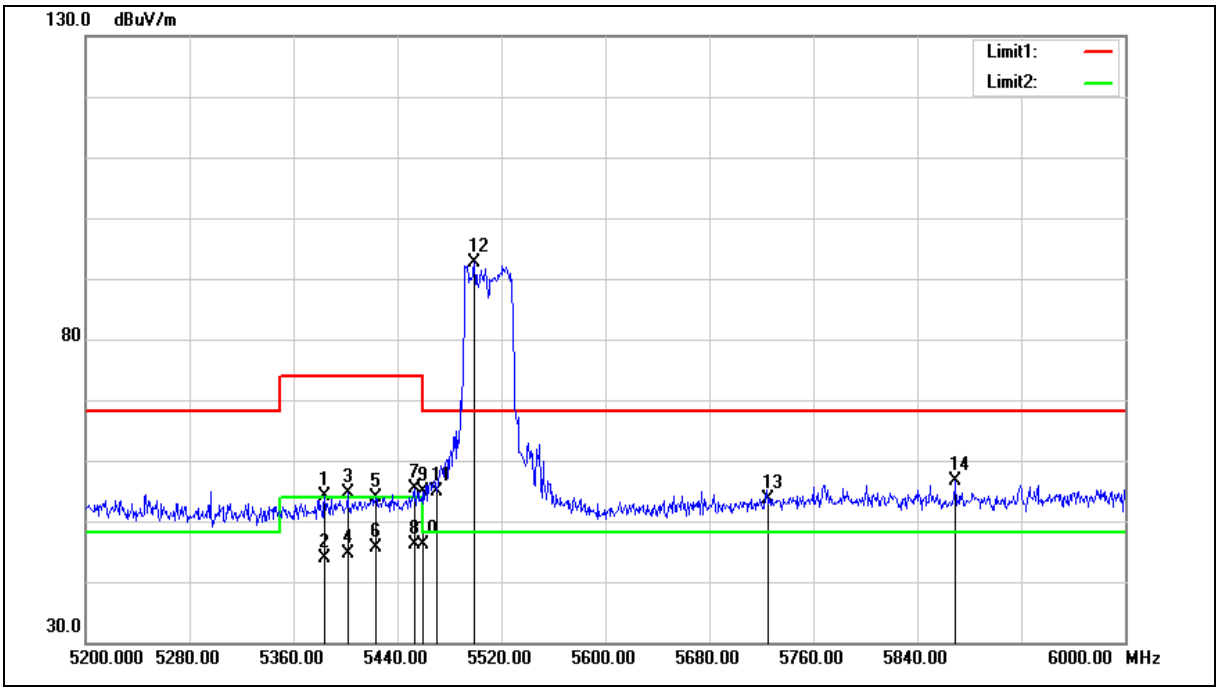

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5510 MHz		
Mode:	Mode 14		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5384.000	48.50	5.69	54.19	74.00	-19.81	peak
2	5384.000	38.13	5.69	43.82	54.00	-10.18	AVG
3	5401.600	49.01	5.73	54.74	74.00	-19.26	peak
4	5401.600	38.96	5.73	44.69	54.00	-9.31	AVG
5	5423.200	48.15	5.79	53.94	74.00	-20.06	peak
6	5423.200	39.85	5.79	45.64	54.00	-8.36	AVG
7	5452.800	49.52	5.86	55.38	74.00	-18.62	peak
8	5452.800	40.32	5.86	46.18	54.00	-7.82	AVG
9	5460.000	48.93	5.88	54.81	74.00	-19.19	peak
10	5460.000	40.22	5.88	46.10	54.00	-7.90	AVG
11	5470.000	49.06	5.91	54.97	68.20	-13.23	peak
12	5499.200	86.74	5.98	92.72	--	--	peak
13	5725.000	47.27	6.47	53.74	68.20	-14.46	peak
14	5869.600	49.74	6.80	56.54	68.20	-11.66	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5510 MHz		
Mode:	Mode 14		
Ant.Polar.:	Vertical		

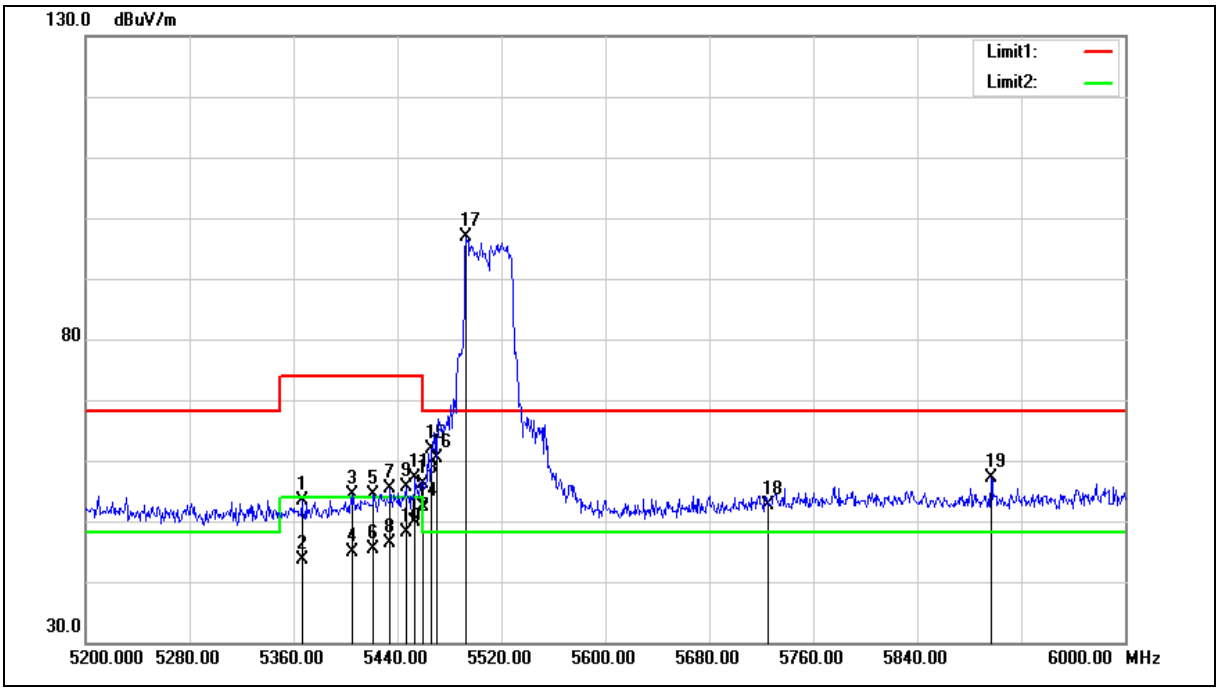

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5510 MHz		
Mode:	Mode 14		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5366.400	47.70	5.65	53.35	74.00	-20.65	peak
2	5366.400	38.10	5.65	43.75	54.00	-10.25	AVG
3	5405.600	48.72	5.74	54.46	74.00	-19.54	peak
4	5405.600	39.11	5.74	44.85	54.00	-9.15	AVG
5	5421.600	48.56	5.79	54.35	74.00	-19.65	peak
6	5421.600	39.47	5.79	45.26	54.00	-8.74	AVG
7	5434.400	49.45	5.81	55.26	74.00	-18.74	peak
8	5434.400	40.63	5.81	46.44	54.00	-7.56	AVG
9	5446.400	49.86	5.84	55.70	74.00	-18.30	peak
10	5446.400	42.25	5.84	48.09	54.00	-5.91	AVG
11	5453.600	51.15	5.86	57.01	74.00	-16.99	peak
12	5453.600	44.11	5.86	49.97	54.00	-4.03	AVG
13	5460.000	50.32	5.88	56.20	74.00	-17.80	peak
14	5460.000	46.58	5.88	52.46	54.00	-1.54	AVG
15	5466.400	55.95	5.89	61.84	68.20	-6.36	peak
16	5470.000	54.42	5.91	60.33	68.20	-7.87	peak
17	5492.800	90.82	5.96	96.78	--	--	peak
18	5725.000	46.12	6.47	52.59	68.20	-15.61	peak
19	5896.800	50.26	6.87	57.13	68.20	-11.07	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5550 MHz		
Mode:	Mode 14		
Ant.Polar.:	Horizontal		

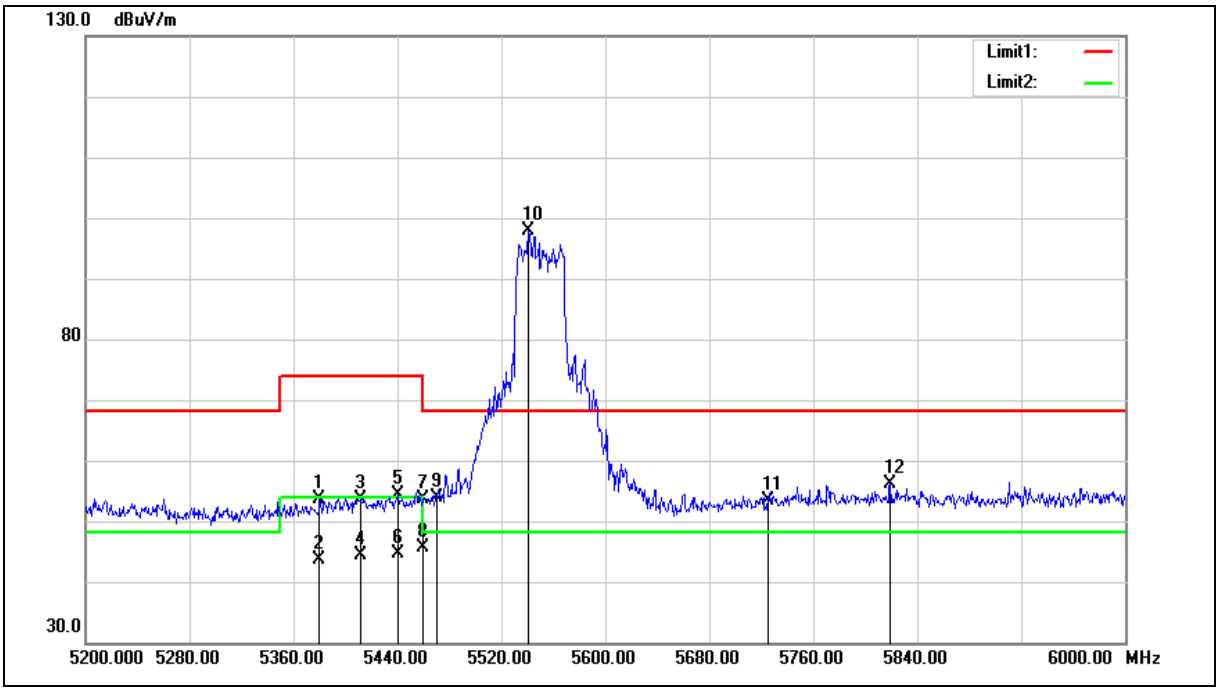

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5550 MHz		
Mode:	Mode 14		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5380.000	48.04	5.67	53.71	74.00	-20.29	peak
2	5380.000	38.07	5.67	43.74	54.00	-10.26	AVG
3	5411.200	47.87	5.76	53.63	74.00	-20.37	peak
4	5411.200	38.64	5.76	44.40	54.00	-9.60	AVG
5	5440.800	48.60	5.82	54.42	74.00	-19.58	peak
6	5440.800	38.93	5.82	44.75	54.00	-9.25	AVG
7	5460.000	47.68	5.88	53.56	74.00	-20.44	peak
8	5460.000	39.78	5.88	45.66	54.00	-8.34	AVG
9	5470.000	47.98	5.91	53.89	68.20	-14.31	peak
10	5540.800	91.70	6.07	97.77	--	--	peak
11	5725.000	46.99	6.47	53.46	68.20	-14.74	peak
12	5819.200	49.48	6.69	56.17	68.20	-12.03	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5550 MHz		
Mode:	Mode 14		
Ant.Polar.:	Vertical		

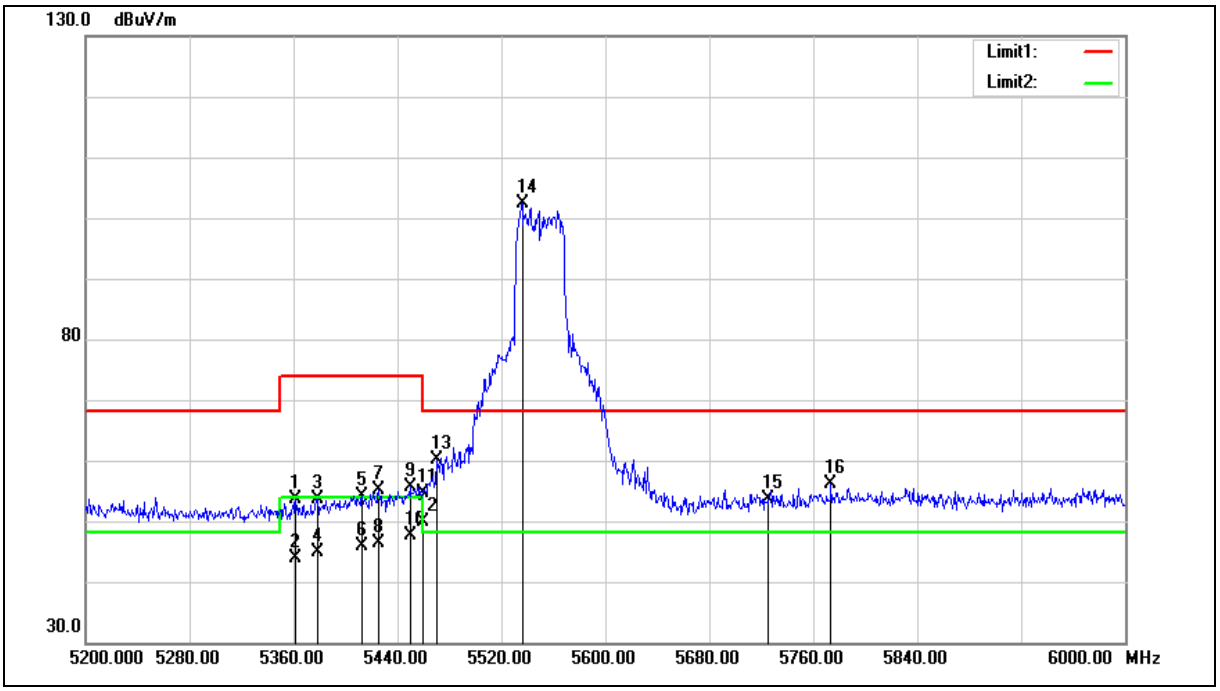

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5550 MHz		
Mode:	Mode 14		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5361.600	47.92	5.64	53.56	74.00	-20.44	peak
2	5361.600	38.21	5.64	43.85	54.00	-10.15	AVG
3	5378.400	47.99	5.67	53.66	74.00	-20.34	peak
4	5378.400	39.16	5.67	44.83	54.00	-9.17	AVG
5	5412.800	48.36	5.76	54.12	74.00	-19.88	peak
6	5412.800	40.11	5.76	45.87	54.00	-8.13	AVG
7	5425.600	49.33	5.80	55.13	74.00	-18.87	peak
8	5425.600	40.59	5.80	46.39	54.00	-7.61	AVG
9	5449.600	49.74	5.85	55.59	74.00	-18.41	peak
10	5449.600	41.74	5.85	47.59	54.00	-6.41	AVG
11	5460.000	48.71	5.88	54.59	74.00	-19.41	peak
12	5460.000	43.94	5.88	49.82	54.00	-4.18	AVG
13	5470.000	54.27	5.91	60.18	68.20	-8.02	peak
14	5536.000	96.41	6.06	102.47	--	--	peak
15	5725.000	47.22	6.47	53.69	68.20	-14.51	peak
16	5773.600	49.53	6.58	56.11	68.20	-12.09	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5670 MHz		
Mode:	Mode 14		
Ant.Polar.:	Horizontal		

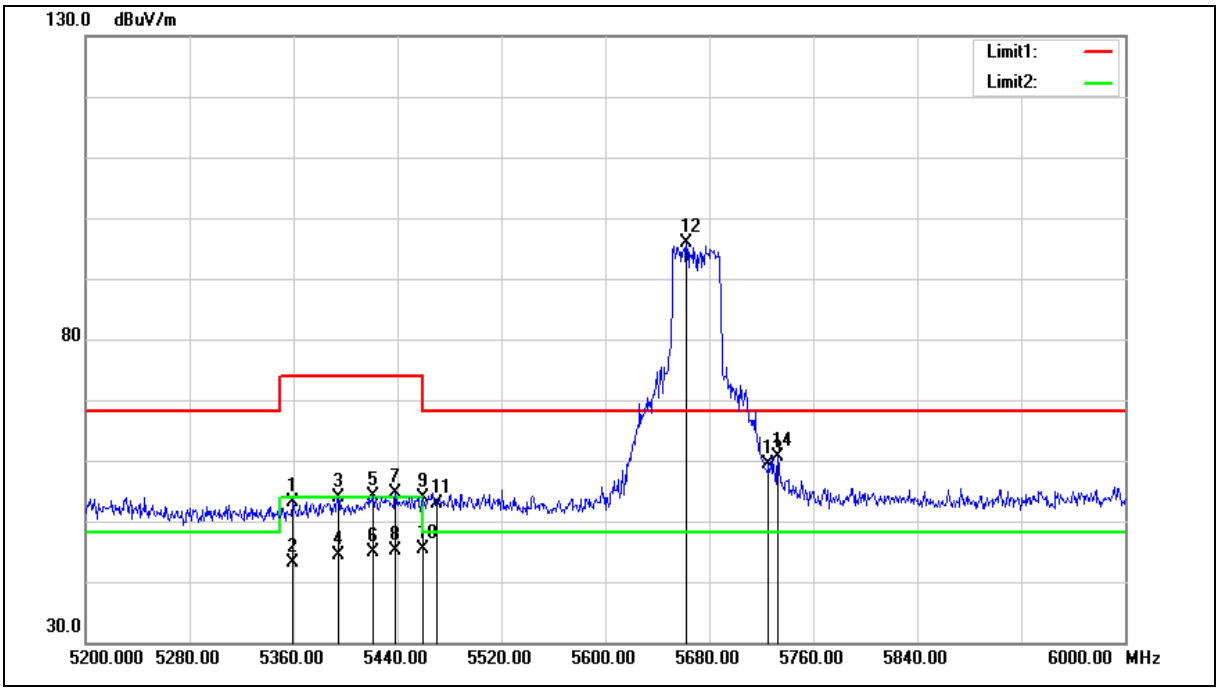

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5670 MHz		
Mode:	Mode 14		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5359.200	47.56	5.64	53.20	74.00	-20.80	peak
2	5359.200	37.58	5.64	43.22	54.00	-10.78	AVG
3	5394.400	48.21	5.72	53.93	74.00	-20.07	peak
4	5394.400	38.58	5.72	44.30	54.00	-9.70	AVG
5	5421.600	48.26	5.79	54.05	74.00	-19.95	peak
6	5421.600	39.03	5.79	44.82	54.00	-9.18	AVG
7	5438.400	48.75	5.82	54.57	74.00	-19.43	peak
8	5438.400	39.20	5.82	45.02	54.00	-8.98	AVG
9	5460.000	48.06	5.88	53.94	74.00	-20.06	peak
10	5460.000	39.43	5.88	45.31	54.00	-8.69	AVG
11	5470.000	46.89	5.91	52.80	68.20	-15.40	peak
12	5662.400	89.44	6.34	95.78	--	--	peak
13	5725.000	53.00	6.47	59.47	68.20	-8.73	peak
14	5732.800	54.12	6.50	60.62	68.20	-7.58	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5670 MHz		
Mode:	Mode 14		
Ant.Polar.:	Vertical		

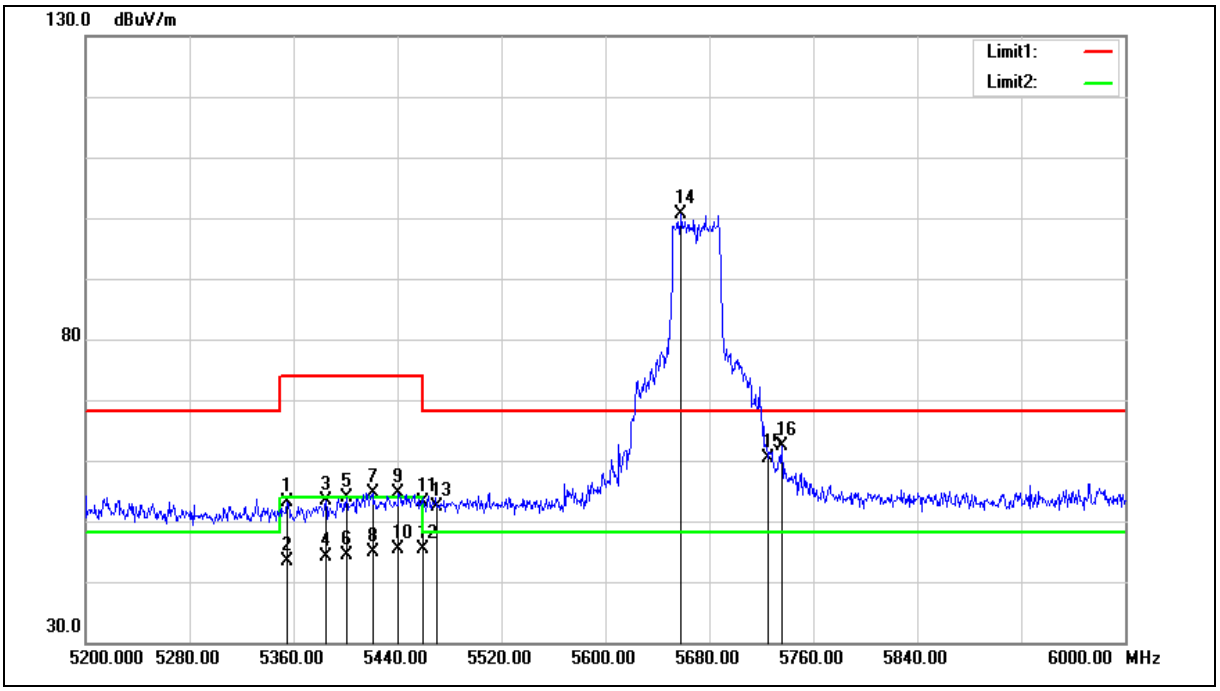

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5670 MHz		
Mode:	Mode 14		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5355.200	47.61	5.62	53.23	74.00	-20.77	peak
2	5355.200	37.68	5.62	43.30	54.00	-10.70	AVG
3	5384.800	47.65	5.69	53.34	74.00	-20.66	peak
4	5384.800	38.32	5.69	44.01	54.00	-9.99	AVG
5	5400.800	48.19	5.73	53.92	74.00	-20.08	peak
6	5400.800	38.63	5.73	44.36	54.00	-9.64	AVG
7	5420.800	48.82	5.79	54.61	74.00	-19.39	peak
8	5420.800	39.02	5.79	44.81	54.00	-9.19	AVG
9	5440.800	48.75	5.82	54.57	74.00	-19.43	peak
10	5440.800	39.51	5.82	45.33	54.00	-8.67	AVG
11	5460.000	47.14	5.88	53.02	74.00	-20.98	peak
12	5460.000	39.38	5.88	45.26	54.00	-8.74	AVG
13	5470.000	46.57	5.91	52.48	68.20	-15.72	peak
14	5658.400	94.34	6.33	100.67	--	--	peak
15	5725.000	53.86	6.47	60.33	68.20	-7.87	peak
16	5736.000	55.91	6.50	62.41	68.20	-5.79	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5755 MHz		
Mode:	Mode 14		
Ant.Polar.:	Horizontal		

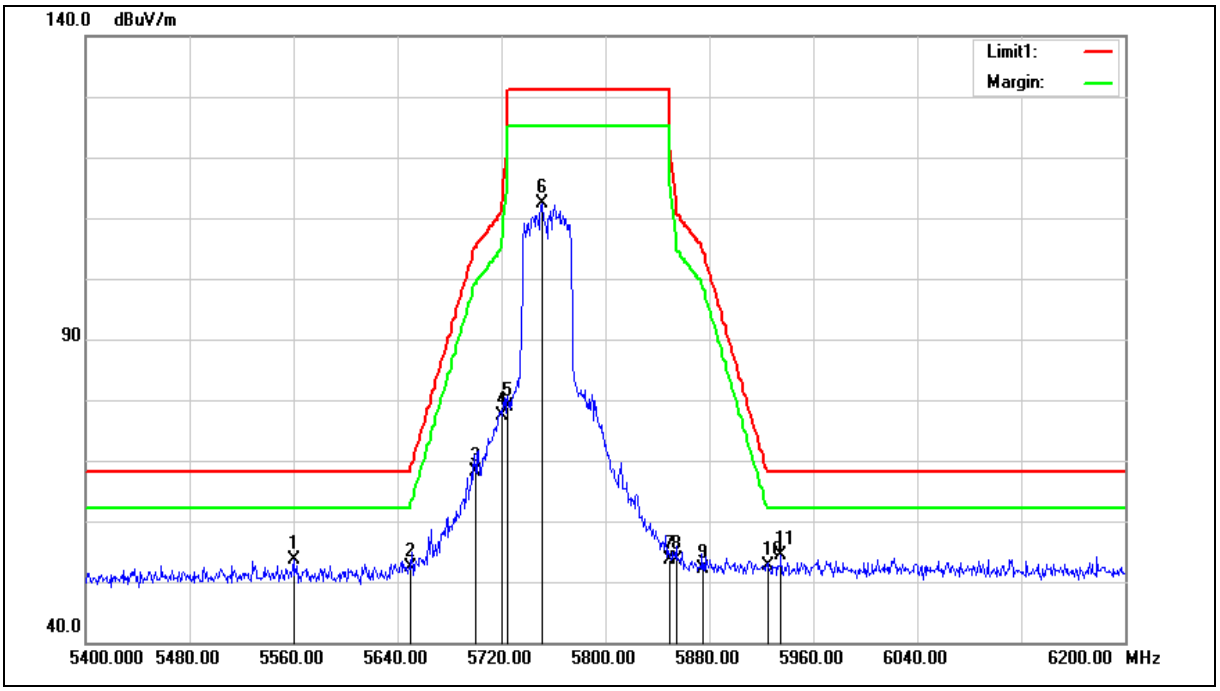

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5755 MHz		
Mode:	Mode 14		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5560.000	53.15	0.39	53.54	68.20	-14.66	peak
2	5650.000	51.64	0.62	52.26	68.20	-15.94	peak
3	5700.000	67.44	0.75	68.19	105.20	-37.01	peak
4	5720.000	76.58	0.81	77.39	110.80	-33.41	peak
5	5725.000	78.04	0.82	78.86	122.20	-43.34	peak
6	5751.200	111.45	0.90	112.35	--	--	peak
7	5850.000	52.45	1.17	53.62	122.20	-68.58	peak
8	5855.000	52.51	1.18	53.69	110.80	-57.11	peak
9	5875.000	50.78	1.23	52.01	105.20	-53.19	peak
10	5925.000	51.19	1.37	52.56	68.20	-15.64	peak
11	5935.200	52.91	1.40	54.31	68.20	-13.89	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5755 MHz		
Mode:	Mode 14		
Ant.Polar.:	Vertical		

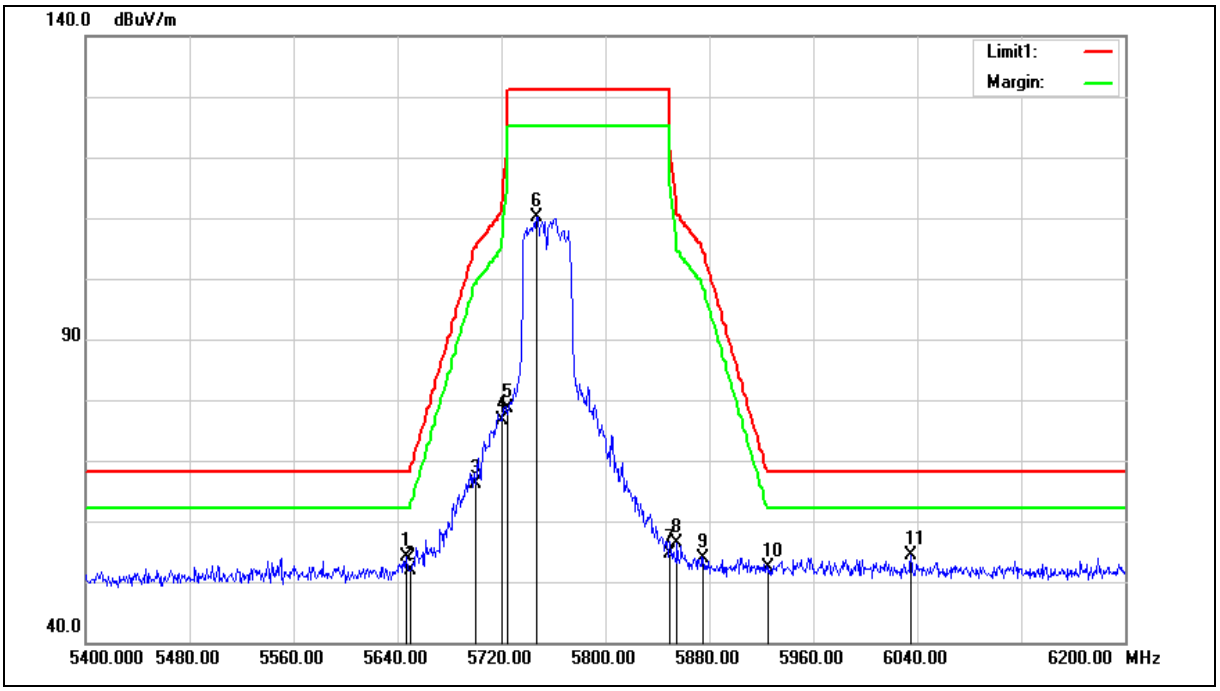

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5755 MHz		
Mode:	Mode 14		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5647.200	53.56	0.62	54.18	68.20	-14.02	peak
2	5650.000	51.14	0.62	51.76	68.20	-16.44	peak
3	5700.000	65.46	0.75	66.21	105.20	-38.99	peak
4	5720.000	75.80	0.81	76.61	110.80	-34.19	peak
5	5725.000	77.93	0.82	78.75	122.20	-43.45	peak
6	5747.200	109.22	0.89	110.11	--	--	peak
7	5850.000	53.43	1.17	54.60	122.20	-67.60	peak
8	5855.000	55.28	1.18	56.46	110.80	-54.34	peak
9	5875.000	52.57	1.23	53.80	105.20	-51.40	peak
10	5925.000	50.95	1.37	52.32	68.20	-15.88	peak
11	6035.200	52.63	1.70	54.33	68.20	-13.87	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5795 MHz		
Mode:	Mode 14		
Ant.Polar.:	Horizontal		

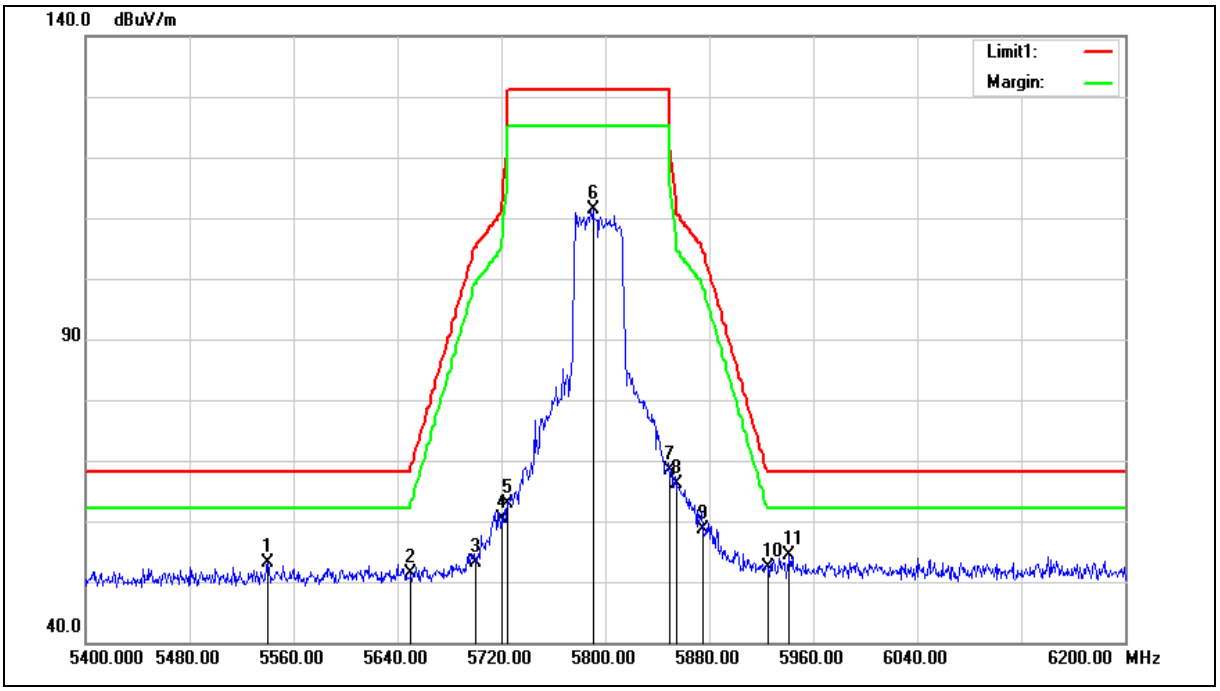

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5795 MHz		
Mode:	Mode 14		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5540.000	52.78	0.32	53.10	68.20	-15.10	peak
2	5650.000	50.79	0.62	51.41	68.20	-16.79	peak
3	5700.000	52.46	0.75	53.21	105.20	-51.99	peak
4	5720.000	59.54	0.81	60.35	110.80	-50.45	peak
5	5725.000	61.98	0.82	62.80	122.20	-59.40	peak
6	5790.400	110.48	1.00	111.48	--	--	peak
7	5850.000	67.19	1.17	68.36	122.20	-53.84	peak
8	5855.000	65.02	1.18	66.20	110.80	-44.60	peak
9	5875.000	57.42	1.23	58.65	105.20	-46.55	peak
10	5925.000	50.90	1.37	52.27	68.20	-15.93	peak
11	5941.600	52.88	1.42	54.30	68.20	-13.90	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5795 MHz		
Mode:	Mode 14		
Ant.Polar.:	Vertical		

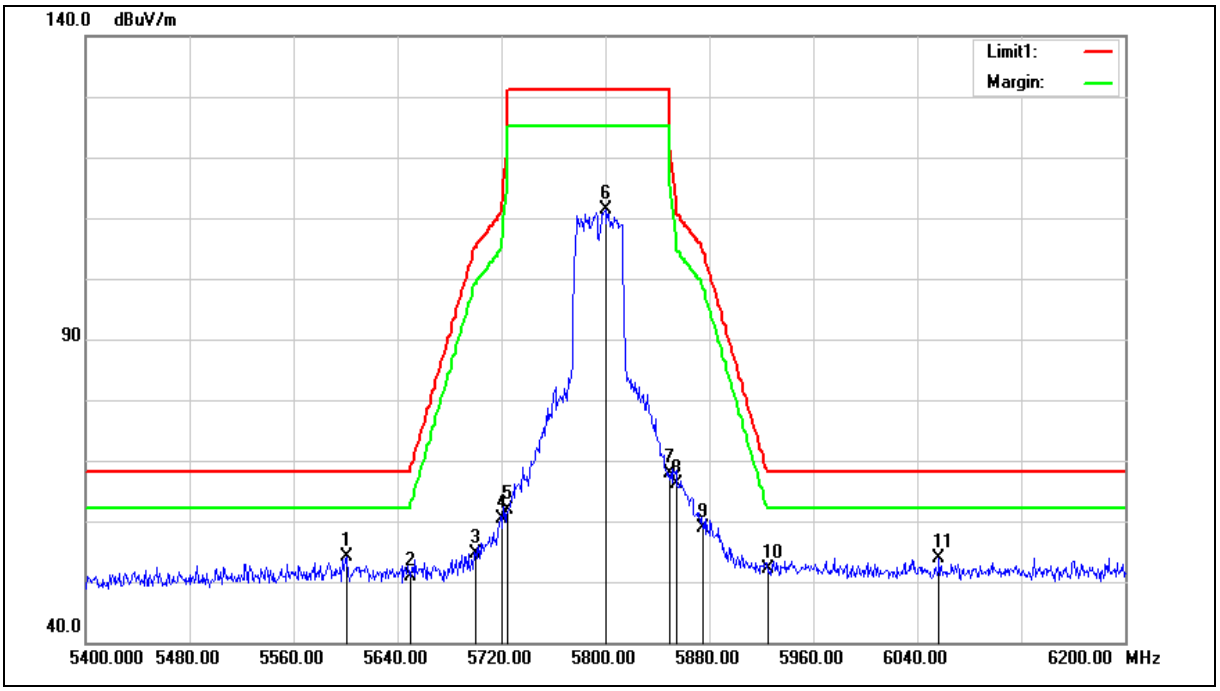

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5795 MHz		
Mode:	Mode 14		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5600.800	53.56	0.48	54.04	68.20	-14.16	peak
2	5650.000	50.34	0.62	50.96	68.20	-17.24	peak
3	5700.000	53.89	0.75	54.64	105.20	-50.56	peak
4	5720.000	59.55	0.81	60.36	110.80	-50.44	peak
5	5725.000	61.18	0.82	62.00	122.20	-60.20	peak
6	5800.000	110.34	1.03	111.37	--	--	peak
7	5850.000	66.64	1.17	67.81	122.20	-54.39	peak
8	5855.000	64.89	1.18	66.07	110.80	-44.73	peak
9	5875.000	57.58	1.23	58.81	105.20	-46.39	peak
10	5925.000	50.69	1.37	52.06	68.20	-16.14	peak
11	6056.800	52.21	1.77	53.98	68.20	-14.22	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5210 MHz		
Mode:	Mode 15		
Ant.Polar.:	Horizontal		

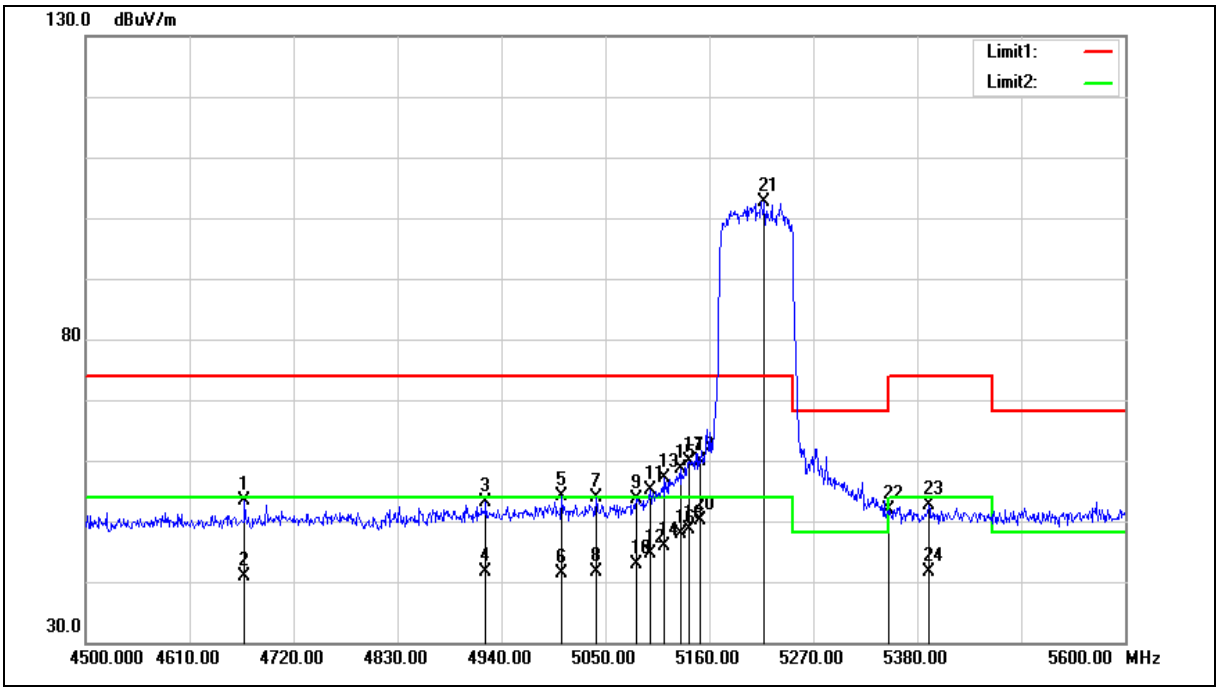

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5210 MHz		
Mode:	Mode 15		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4668.300	55.11	-1.69	53.42	74.00	-20.58	peak
2	4668.300	42.48	-1.69	40.79	54.00	-13.21	AVG
3	4923.500	54.07	-0.99	53.08	74.00	-20.92	peak
4	4923.500	42.61	-0.99	41.62	54.00	-12.38	AVG
5	5003.800	54.90	-0.77	54.13	74.00	-19.87	peak
6	5003.800	42.21	-0.77	41.44	54.00	-12.56	AVG
7	5040.100	54.64	-0.69	53.95	74.00	-20.05	peak
8	5040.100	42.22	-0.69	41.53	54.00	-12.47	AVG
9	5083.000	54.30	-0.60	53.70	74.00	-20.30	peak
10	5083.000	43.39	-0.60	42.79	54.00	-11.21	AVG
11	5097.300	55.73	-0.57	55.16	74.00	-18.84	peak
12	5097.300	45.12	-0.57	44.55	54.00	-9.45	AVG
13	5112.700	57.72	-0.55	57.17	74.00	-16.83	peak
14	5112.700	46.37	-0.55	45.82	54.00	-8.18	AVG
15	5130.300	59.16	-0.52	58.64	74.00	-15.36	peak
16	5130.300	48.45	-0.52	47.93	54.00	-6.07	AVG
17	5139.100	60.28	-0.49	59.79	74.00	-14.21	peak
18	5139.100	49.21	-0.49	48.72	54.00	-5.28	AVG
19	5150.000	60.27	-0.48	59.79	74.00	-14.21	peak
20	5150.000	50.68	-0.48	50.20	54.00	-3.80	AVG
21	5218.300	102.87	-0.35	102.52	--	--	peak
22	5350.000	51.88	-0.08	51.80	74.00	-22.20	peak
23	5392.100	52.56	0.00	52.56	74.00	-21.44	peak
24	5392.100	41.60	0.00	41.60	54.00	-12.40	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5210 MHz		
Mode:	Mode 15		
Ant.Polar.:	Vertical		

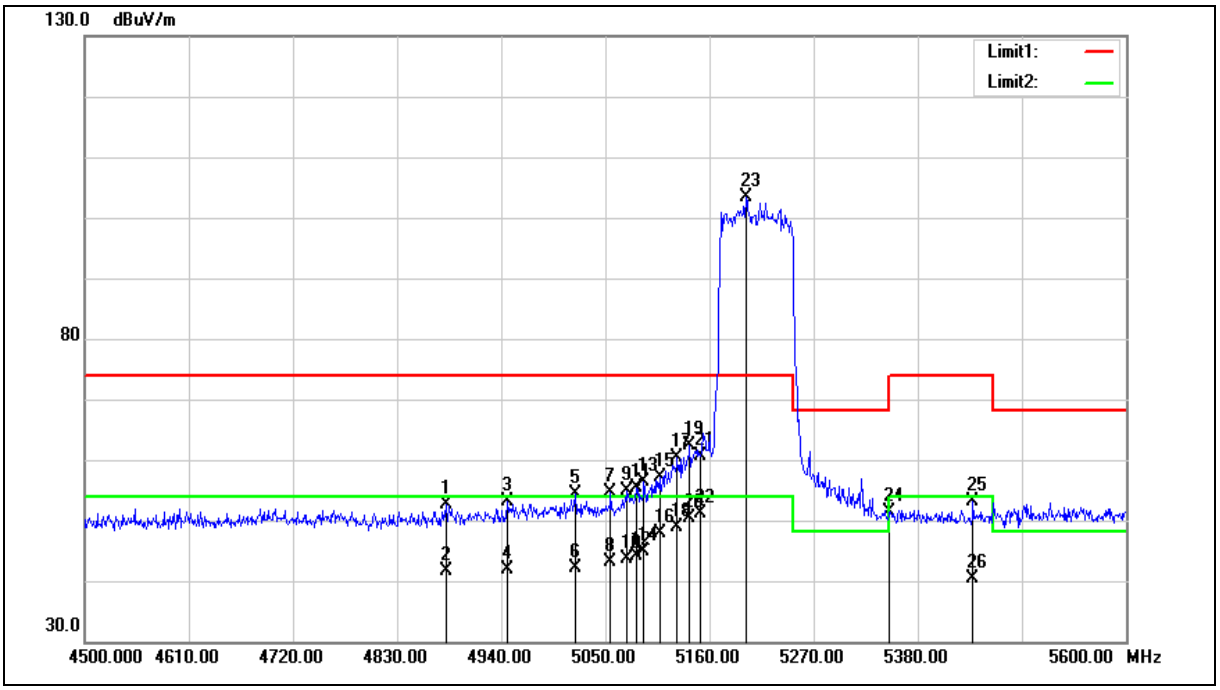

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5210 MHz		
Mode:	Mode 15		
Ant.Polar.:	Vertical		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4881.700	53.69	-1.10	52.59	74.00	-21.41	peak
2	4881.700	42.77	-1.10	41.67	54.00	-12.33	AVG
3	4946.600	54.08	-0.93	53.15	74.00	-20.85	peak
4	4946.600	42.88	-0.93	41.95	54.00	-12.05	AVG
5	5018.100	55.04	-0.74	54.30	74.00	-19.70	peak
6	5018.100	42.90	-0.74	42.16	54.00	-11.84	AVG
7	5055.500	55.37	-0.66	54.71	74.00	-19.29	peak
8	5055.500	43.89	-0.66	43.23	54.00	-10.77	AVG
9	5073.100	55.59	-0.62	54.97	74.00	-19.03	peak
10	5073.100	44.14	-0.62	43.52	54.00	-10.48	AVG
11	5083.000	55.92	-0.60	55.32	74.00	-18.68	peak
12	5083.000	44.69	-0.60	44.09	54.00	-9.91	AVG
13	5090.700	56.88	-0.60	56.28	74.00	-17.72	peak
14	5090.700	45.51	-0.60	44.91	54.00	-9.09	AVG
15	5107.200	57.67	-0.56	57.11	74.00	-16.89	peak
16	5107.200	48.48	-0.56	47.92	54.00	-6.08	AVG
17	5125.900	60.78	-0.52	60.26	74.00	-13.74	peak
18	5125.900	49.30	-0.52	48.78	54.00	-5.22	AVG
19	5139.100	62.83	-0.49	62.34	74.00	-11.66	peak
20	5139.100	50.85	-0.49	50.36	54.00	-3.64	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5210 MHz		
Mode:	Mode 15		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
21	5150.000	60.99	-0.48	60.51	74.00	-13.49	peak
22	5150.000	51.59	-0.48	51.11	54.00	-2.89	AVG
23	5198.500	103.67	-0.37	103.30	--	--	peak
24	5350.000	51.35	-0.08	51.27	74.00	-22.73	peak
25	5438.300	53.11	0.09	53.20	74.00	-20.80	peak
26	5438.300	40.24	0.09	40.33	54.00	-13.67	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5290 MHz		
Mode:	Mode 15		
Ant.Polar.:	Horizontal		

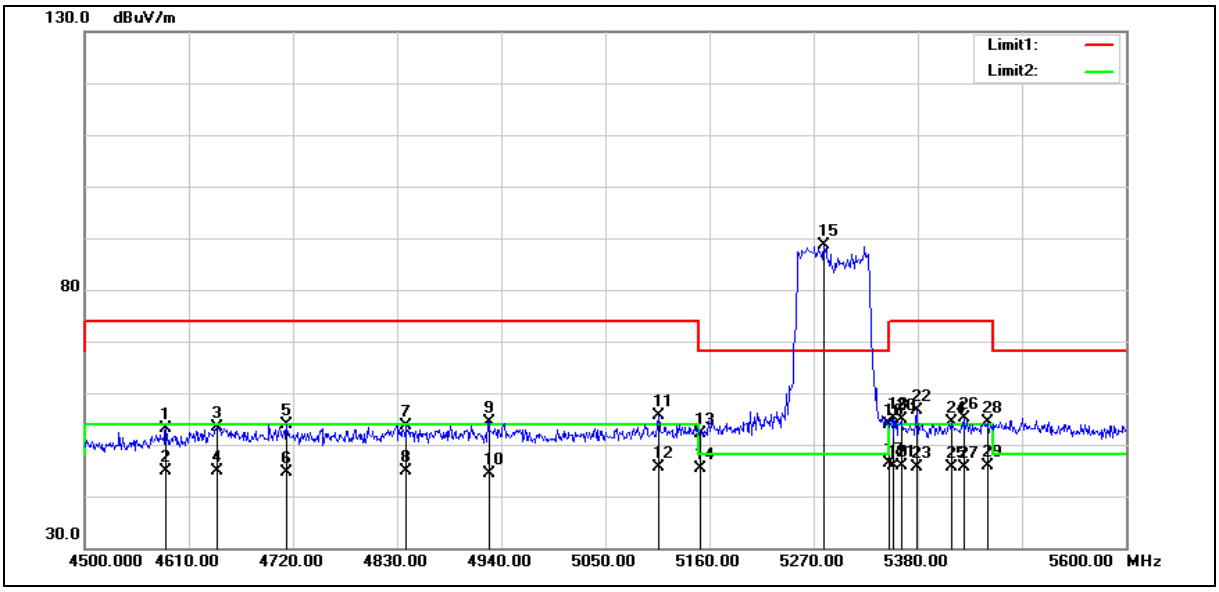

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5290 MHz		
Mode:	Mode 15		
Ant.Polar.:	Horizontal		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4585.800	49.39	3.70	53.09	74.00	-20.91	peak
2	4585.800	41.24	3.70	44.94	54.00	-9.06	AVG
3	4639.700	49.47	3.83	53.30	74.00	-20.70	peak
4	4639.700	41.03	3.83	44.86	54.00	-9.14	AVG
5	4713.400	49.83	4.02	53.85	74.00	-20.15	peak
6	4713.400	40.61	4.02	44.63	54.00	-9.37	AVG
7	4839.900	49.24	4.34	53.58	74.00	-20.42	peak
8	4839.900	40.60	4.34	44.94	54.00	-9.06	AVG
9	4926.800	49.82	4.56	54.38	74.00	-19.62	peak
10	4926.800	39.94	4.56	44.50	54.00	-9.50	AVG
11	5106.100	50.60	5.00	55.60	74.00	-18.40	peak
12	5106.100	40.69	5.00	45.69	54.00	-8.31	AVG
13	5150.000	46.91	5.12	52.03	74.00	-21.97	peak
14	5150.000	40.29	5.12	45.41	54.00	-8.59	AVG
15	5281.000	83.12	5.44	88.56	--	--	peak
16	5350.000	48.36	5.61	53.97	74.00	-20.03	peak
17	5350.000	40.88	5.61	46.49	54.00	-7.51	AVG
18	5353.600	49.46	5.62	55.08	74.00	-18.92	peak
19	5353.600	40.35	5.62	45.97	54.00	-8.03	AVG
20	5362.400	49.33	5.64	54.97	74.00	-19.03	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5290 MHz		
Mode:	Mode 15		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
21	5362.400	40.17	5.64	45.81	54.00	-8.19	AVG
22	5378.900	51.01	5.67	56.68	74.00	-17.32	peak
23	5378.900	39.85	5.67	45.52	54.00	-8.48	AVG
24	5415.200	48.61	5.77	54.38	74.00	-19.62	peak
25	5415.200	39.87	5.77	45.64	54.00	-8.36	AVG
26	5428.400	49.30	5.80	55.10	74.00	-18.90	peak
27	5428.400	39.89	5.80	45.69	54.00	-8.31	AVG
28	5453.700	48.58	5.86	54.44	74.00	-19.56	peak
29	5453.700	40.12	5.86	45.98	54.00	-8.02	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5290 MHz		
Mode:	Mode 15		
Ant.Polar.:	Vertical		

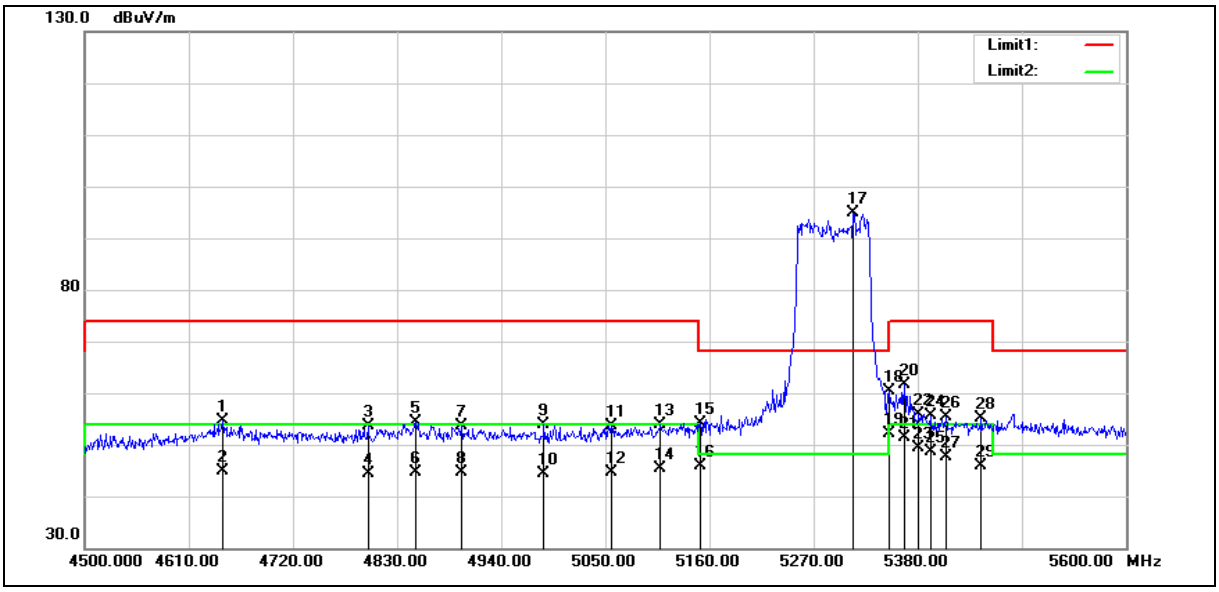

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5290 MHz		
Mode:	Mode 15		
Ant.Polar.:	Vertical		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4645.200	50.83	3.84	54.67	74.00	-19.33	peak
2	4645.200	41.12	3.84	44.96	54.00	-9.04	AVG
3	4799.200	49.33	4.24	53.57	74.00	-20.43	peak
4	4799.200	40.03	4.24	44.27	54.00	-9.73	AVG
5	4849.800	50.10	4.36	54.46	74.00	-19.54	peak
6	4849.800	40.31	4.36	44.67	54.00	-9.33	AVG
7	4898.200	49.02	4.50	53.52	74.00	-20.48	peak
8	4898.200	40.02	4.50	44.52	54.00	-9.48	AVG
9	4985.100	49.17	4.72	53.89	74.00	-20.11	peak
10	4985.100	39.71	4.72	44.43	54.00	-9.57	AVG
11	5056.600	48.78	4.89	53.67	74.00	-20.33	peak
12	5056.600	39.68	4.89	44.57	54.00	-9.43	AVG
13	5108.300	48.97	5.01	53.98	74.00	-20.02	peak
14	5108.300	40.25	5.01	45.26	54.00	-8.74	AVG
15	5150.000	49.05	5.12	54.17	74.00	-19.83	peak
16	5150.000	40.87	5.12	45.99	54.00	-8.01	AVG
17	5311.800	89.30	5.51	94.81	--	--	peak
18	5350.000	54.75	5.61	60.36	74.00	-13.64	peak
19	5350.000	46.43	5.61	52.04	54.00	-1.96	AVG
20	5365.700	55.96	5.65	61.61	74.00	-12.39	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5290 MHz		
Mode:	Mode 15		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
21	5365.700	45.81	5.65	51.46	54.00	-2.54	AVG
22	5381.100	50.32	5.68	56.00	74.00	-18.00	peak
23	5381.100	43.65	5.68	49.33	54.00	-4.67	AVG
24	5393.200	49.83	5.71	55.54	74.00	-18.46	peak
25	5393.200	42.84	5.71	48.55	54.00	-5.45	AVG
26	5409.700	49.72	5.76	55.48	74.00	-18.52	peak
27	5409.700	41.90	5.76	47.66	54.00	-6.34	AVG
28	5447.100	49.34	5.84	55.18	74.00	-18.82	peak
29	5447.100	39.98	5.84	45.82	54.00	-8.18	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5530 MHz		
Mode:	Mode 15		
Ant.Polar.:	Horizontal		

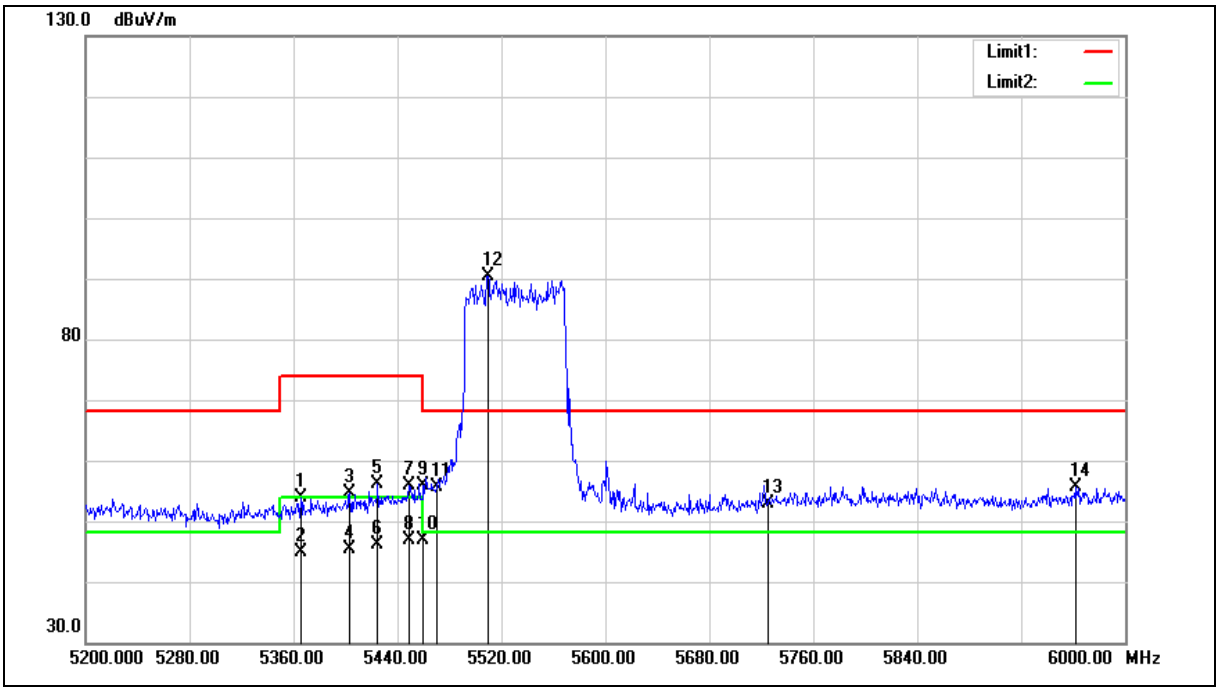

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5530 MHz		
Mode:	Mode 15		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5365.600	48.34	5.65	53.99	74.00	-20.01	peak
2	5365.600	39.25	5.65	44.90	54.00	-9.10	AVG
3	5403.200	48.79	5.74	54.53	74.00	-19.47	peak
4	5403.200	39.74	5.74	45.48	54.00	-8.52	AVG
5	5424.800	50.31	5.79	56.10	74.00	-17.90	peak
6	5424.800	40.39	5.79	46.18	54.00	-7.82	AVG
7	5448.800	49.95	5.85	55.80	74.00	-18.20	peak
8	5448.800	41.05	5.85	46.90	54.00	-7.10	AVG
9	5460.000	49.91	5.88	55.79	74.00	-18.21	peak
10	5460.000	41.00	5.88	46.88	74.00	-27.12	peak
11	5470.000	49.67	5.91	55.58	68.20	-12.62	peak
12	5509.600	84.31	5.99	90.30	--	--	peak
13	5725.000	46.50	6.47	52.97	68.20	-15.23	peak
14	5961.600	48.73	7.01	55.74	68.20	-12.46	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5530 MHz		
Mode:	Mode 15		
Ant.Polar.:	Vertical		

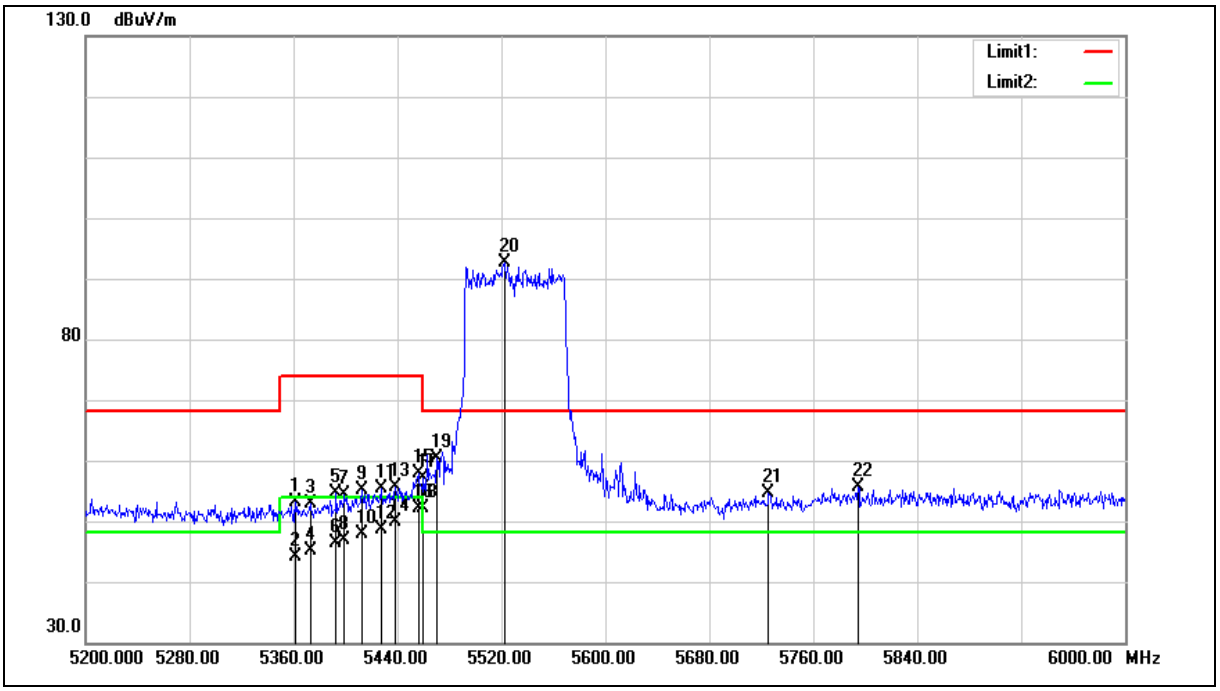

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5530 MHz		
Mode:	Mode 15		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5361.600	47.53	5.64	53.17	74.00	-20.83	peak
2	5361.600	38.57	5.64	44.21	54.00	-9.79	AVG
3	5372.800	47.29	5.66	52.95	74.00	-21.05	peak
4	5372.800	39.43	5.66	45.09	54.00	-8.91	AVG
5	5392.800	48.82	5.71	54.53	74.00	-19.47	peak
6	5392.800	40.67	5.71	46.38	54.00	-7.62	AVG
7	5399.200	48.65	5.73	54.38	74.00	-19.62	peak
8	5399.200	41.04	5.73	46.77	54.00	-7.23	AVG
9	5412.800	49.26	5.76	55.02	74.00	-18.98	peak
10	5412.800	42.10	5.76	47.86	54.00	-6.14	AVG
11	5427.200	49.68	5.80	55.48	74.00	-18.52	peak
12	5427.200	42.88	5.80	48.68	54.00	-5.32	AVG
13	5438.400	49.91	5.82	55.73	74.00	-18.27	peak
14	5438.400	44.15	5.82	49.97	54.00	-4.03	AVG
15	5456.000	51.98	5.86	57.84	74.00	-16.16	peak
16	5456.000	46.20	5.86	52.06	54.00	-1.94	AVG
17	5460.000	51.17	5.88	57.05	74.00	-16.95	peak
18	5460.000	46.17	5.88	52.05	54.00	-1.95	AVG
19	5470.000	54.51	5.91	60.42	68.20	-7.78	peak
20	5522.400	86.67	6.02	92.69	--	--	peak
21	5725.000	48.22	6.47	54.69	68.20	-13.51	peak
22	5794.400	49.02	6.63	55.65	68.20	-12.55	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5775 MHz		
Mode:	Mode 15		
Ant.Polar.:	Horizontal		

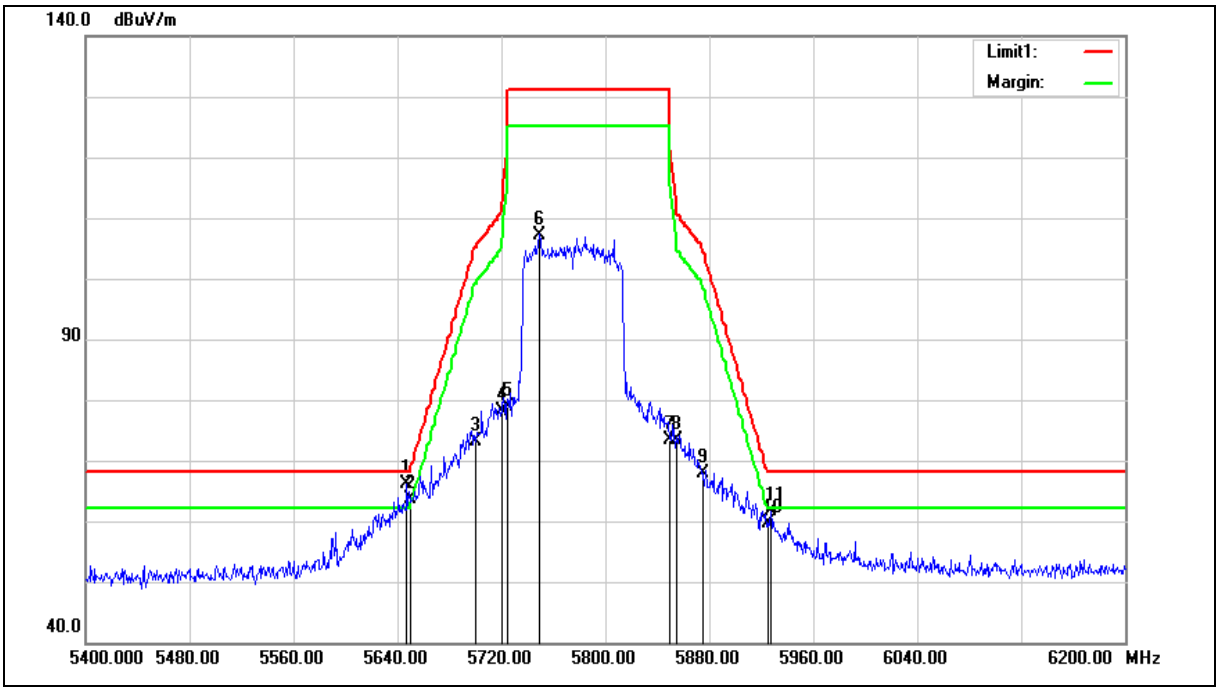

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5775 MHz		
Mode:	Mode 15		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5647.200	65.52	0.62	66.14	68.20	-2.06	peak
2	5650.000	63.10	0.62	63.72	68.20	-4.48	peak
3	5700.000	72.35	0.75	73.10	105.20	-32.10	peak
4	5720.000	77.32	0.81	78.13	110.80	-32.67	peak
5	5725.000	77.95	0.82	78.77	122.20	-43.43	peak
6	5749.600	106.34	0.89	107.23	--	--	peak
7	5850.000	72.30	1.17	73.47	122.20	-48.73	peak
8	5855.000	72.08	1.18	73.26	110.80	-37.54	peak
9	5875.000	66.68	1.23	67.91	105.20	-37.29	peak
10	5925.000	58.15	1.37	59.52	68.20	-8.68	peak
11	5927.200	60.28	1.37	61.65	68.20	-6.55	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5775 MHz		
Mode:	Mode 15		
Ant.Polar.:	Vertical		

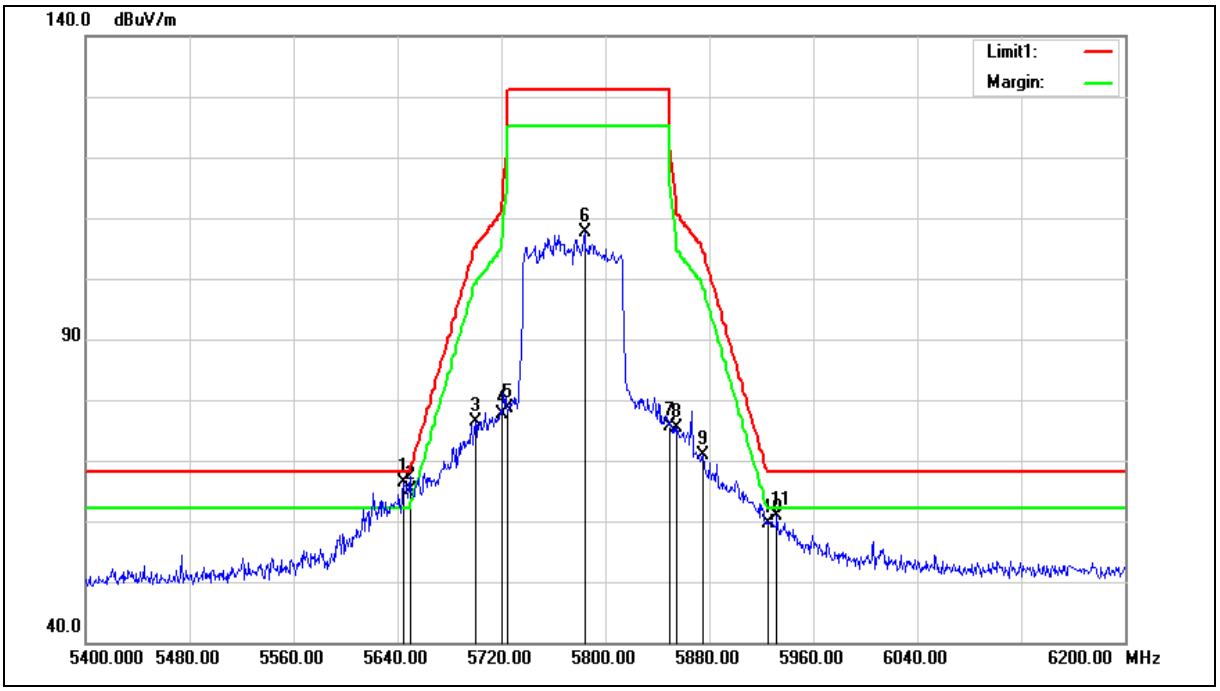

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5775 MHz		
Mode:	Mode 15		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5644.800	65.77	0.60	66.37	68.20	-1.83	peak
2	5650.000	64.40	0.62	65.02	68.20	-3.18	peak
3	5700.000	75.62	0.75	76.37	105.20	-28.83	peak
4	5720.000	76.92	0.81	77.73	110.80	-33.07	peak
5	5725.000	77.72	0.82	78.54	122.20	-43.66	peak
6	5784.000	106.74	0.98	107.72	--	--	peak
7	5850.000	74.35	1.17	75.52	122.20	-46.68	peak
8	5855.000	74.27	1.18	75.45	110.80	-35.35	peak
9	5875.000	69.58	1.23	70.81	105.20	-34.39	peak
10	5925.000	58.35	1.37	59.72	68.20	-8.48	peak
11	5932.000	59.43	1.38	60.81	68.20	-7.39	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5180 MHz		
Mode:	Mode 16		
Ant.Polar.:	Horizontal		

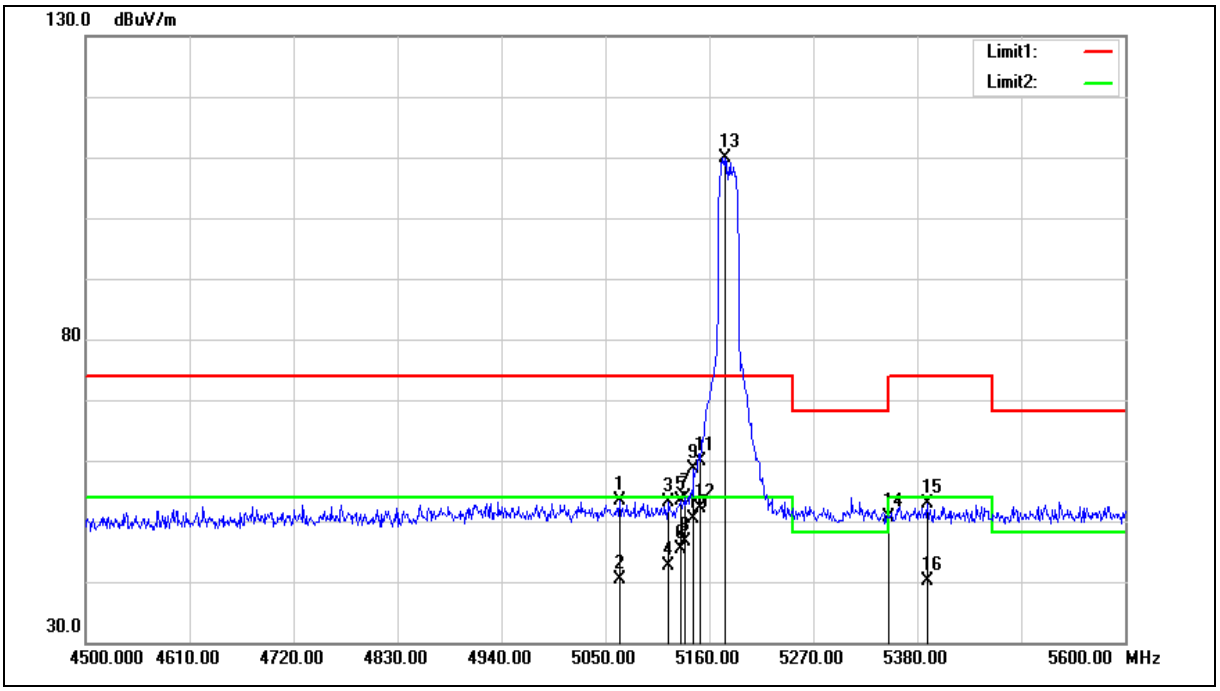

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5180 MHz		
Mode:	Mode 16		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5065.400	54.05	-0.64	53.41	74.00	-20.59	peak
2	5065.400	41.03	-0.64	40.39	54.00	-13.61	AVG
3	5117.100	53.63	-0.54	53.09	74.00	-20.91	peak
4	5117.100	43.21	-0.54	42.67	54.00	-11.33	AVG
5	5130.300	53.96	-0.52	53.44	74.00	-20.56	peak
6	5130.300	45.97	-0.52	45.45	54.00	-8.55	AVG
7	5134.700	54.41	-0.51	53.90	74.00	-20.10	peak
8	5134.700	47.17	-0.51	46.66	54.00	-7.34	AVG
9	5143.500	59.18	-0.49	58.69	74.00	-15.31	peak
10	5143.500	50.98	-0.49	50.49	54.00	-3.51	AVG
11	5150.000	60.48	-0.48	60.00	74.00	-14.00	peak
12	5150.000	52.63	-0.48	52.15	54.00	-1.85	AVG
13	5176.500	110.31	-0.43	109.88	--	--	peak
14	5350.000	50.61	-0.08	50.53	74.00	-23.47	peak
15	5391.000	52.89	0.00	52.89	74.00	-21.11	peak
16	5391.000	40.11	0.00	40.11	54.00	-13.89	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5180 MHz		
Mode:	Mode 16		
Ant.Polar.:	Vertical		

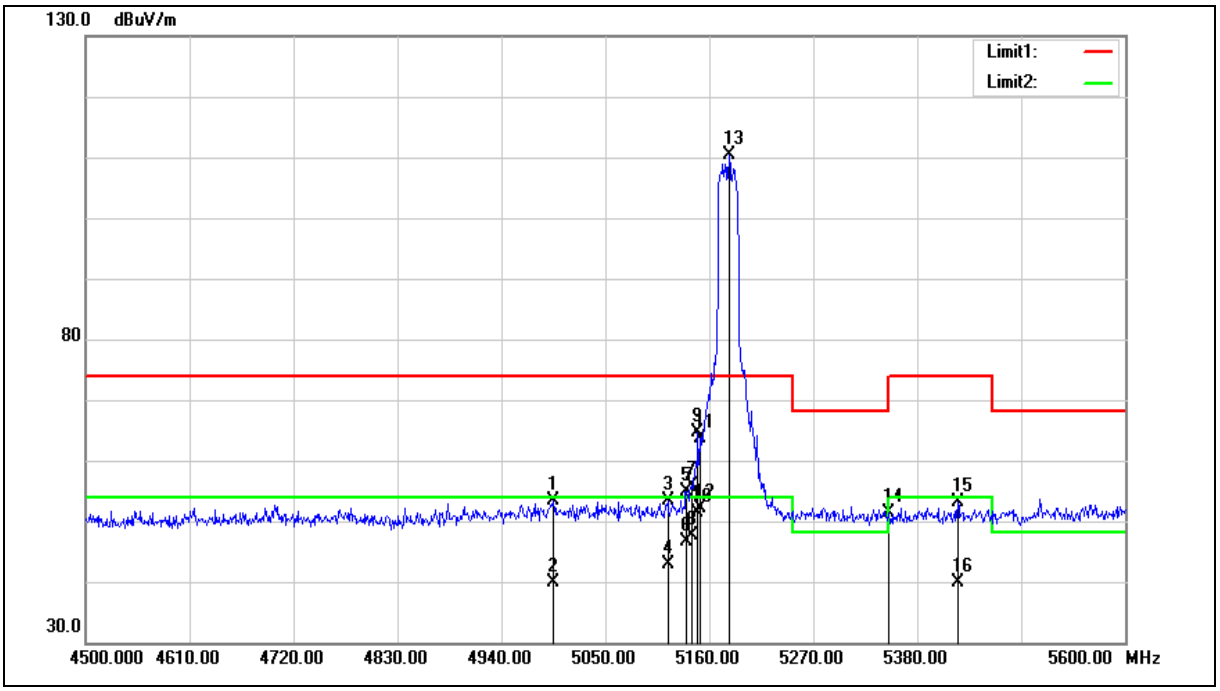

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5180 MHz		
Mode:	Mode 16		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4995.000	54.04	-0.78	53.26	74.00	-20.74	peak
2	4995.000	40.76	-0.78	39.98	54.00	-14.02	AVG
3	5116.000	53.84	-0.54	53.30	74.00	-20.70	peak
4	5116.000	43.47	-0.54	42.93	54.00	-11.07	AVG
5	5135.800	55.46	-0.50	54.96	74.00	-19.04	peak
6	5135.800	47.17	-0.50	46.67	54.00	-7.33	AVG
7	5141.300	56.28	-0.49	55.79	74.00	-18.21	peak
8	5141.300	48.05	-0.49	47.56	54.00	-6.44	AVG
9	5147.900	65.20	-0.48	64.72	74.00	-9.28	peak
10	5147.900	51.80	-0.48	51.32	54.00	-2.68	AVG
11	5150.000	64.02	-0.48	63.54	74.00	-10.46	peak
12	5150.000	52.61	-0.48	52.13	54.00	-1.87	AVG
13	5180.900	110.78	-0.42	110.36	--	--	peak
14	5350.000	51.40	-0.08	51.32	74.00	-22.68	peak
15	5422.900	52.99	0.06	53.05	74.00	-20.95	peak
16	5422.900	39.73	0.06	39.79	54.00	-14.21	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5200 MHz		
Mode:	Mode 16		
Ant.Polar.:	Horizontal		

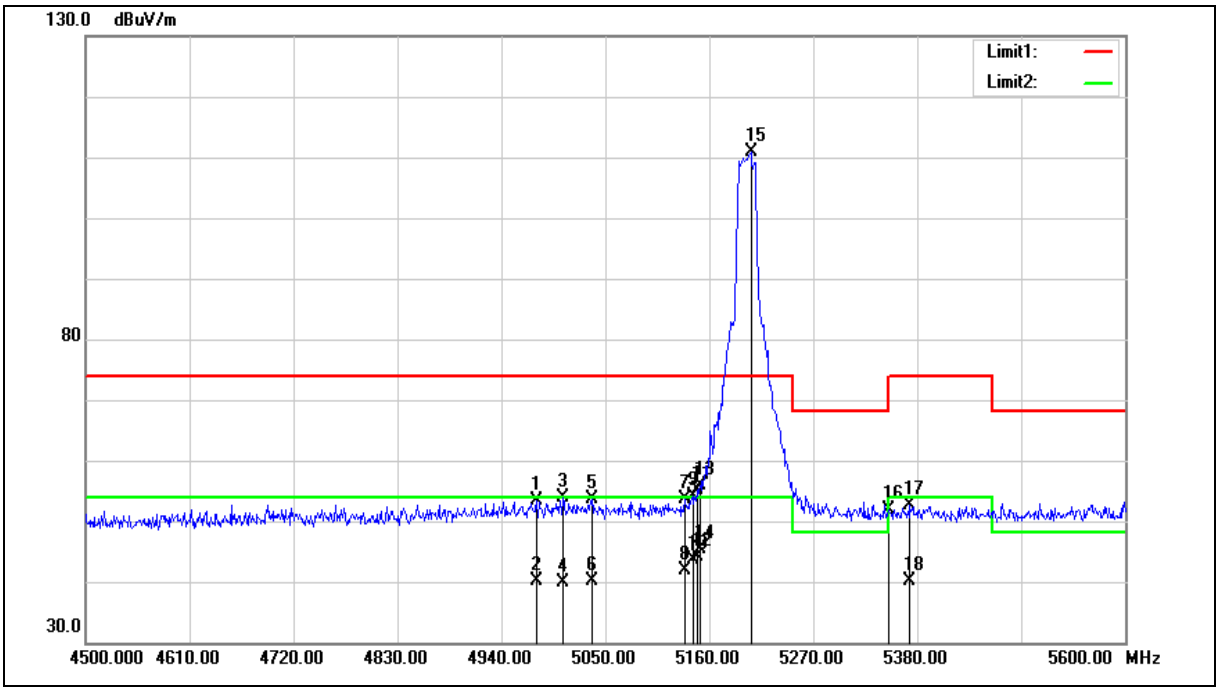

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5200 MHz		
Mode:	Mode 16		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4977.400	54.13	-0.83	53.30	74.00	-20.70	peak
2	4977.400	40.98	-0.83	40.15	54.00	-13.85	AVG
3	5004.900	54.71	-0.77	53.94	74.00	-20.06	peak
4	5004.900	40.73	-0.77	39.96	54.00	-14.04	AVG
5	5035.700	54.25	-0.70	53.55	74.00	-20.45	peak
6	5035.700	40.79	-0.70	40.09	54.00	-13.91	AVG
7	5133.600	54.10	-0.51	53.59	74.00	-20.41	peak
8	5133.600	42.42	-0.51	41.91	54.00	-12.09	AVG
9	5142.400	54.73	-0.49	54.24	74.00	-19.76	peak
10	5142.400	44.02	-0.49	43.53	54.00	-10.47	AVG
11	5146.800	55.61	-0.48	55.13	74.00	-18.87	peak
12	5146.800	44.68	-0.48	44.20	54.00	-9.80	AVG
13	5150.000	56.47	-0.48	55.99	74.00	-18.01	peak
14	5150.000	45.74	-0.48	45.26	54.00	-8.74	AVG
15	5204.000	111.19	-0.37	110.82	--	--	peak
16	5350.000	51.99	-0.08	51.91	74.00	-22.09	peak
17	5372.300	52.63	-0.03	52.60	74.00	-21.40	peak
18	5372.300	40.22	-0.03	40.19	54.00	-13.81	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5200 MHz		
Mode:	Mode 16		
Ant.Polar.:	Vertical		

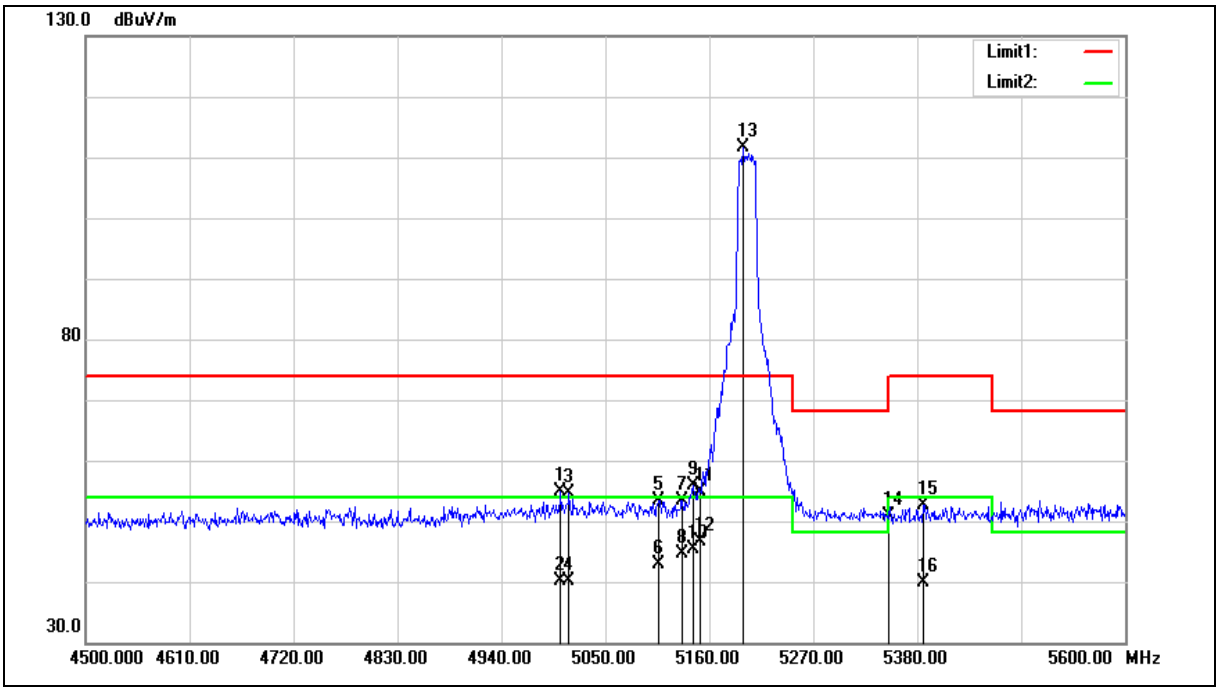

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5200 MHz		
Mode:	Mode 16		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5002.700	55.60	-0.77	54.83	74.00	-19.17	peak
2	5002.700	40.90	-0.77	40.13	54.00	-13.87	AVG
3	5011.500	55.31	-0.74	54.57	74.00	-19.43	peak
4	5011.500	40.78	-0.74	40.04	54.00	-13.96	AVG
5	5106.100	53.94	-0.57	53.37	74.00	-20.63	peak
6	5106.100	43.39	-0.57	42.82	54.00	-11.18	AVG
7	5131.400	53.93	-0.51	53.42	74.00	-20.58	peak
8	5131.400	45.14	-0.51	44.63	54.00	-9.37	AVG
9	5142.400	56.32	-0.49	55.83	74.00	-18.17	peak
10	5142.400	45.81	-0.49	45.32	54.00	-8.68	AVG
11	5150.000	55.47	-0.48	54.99	74.00	-19.01	peak
12	5150.000	47.05	-0.48	46.57	54.00	-7.43	AVG
13	5195.200	112.13	-0.39	111.74	--	--	peak
14	5350.000	51.06	-0.08	50.98	74.00	-23.02	peak
15	5386.600	52.60	0.00	52.60	74.00	-21.40	peak
16	5386.600	39.95	0.00	39.95	54.00	-14.05	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5240 MHz		
Mode:	Mode 16		
Ant.Polar.:	Horizontal		

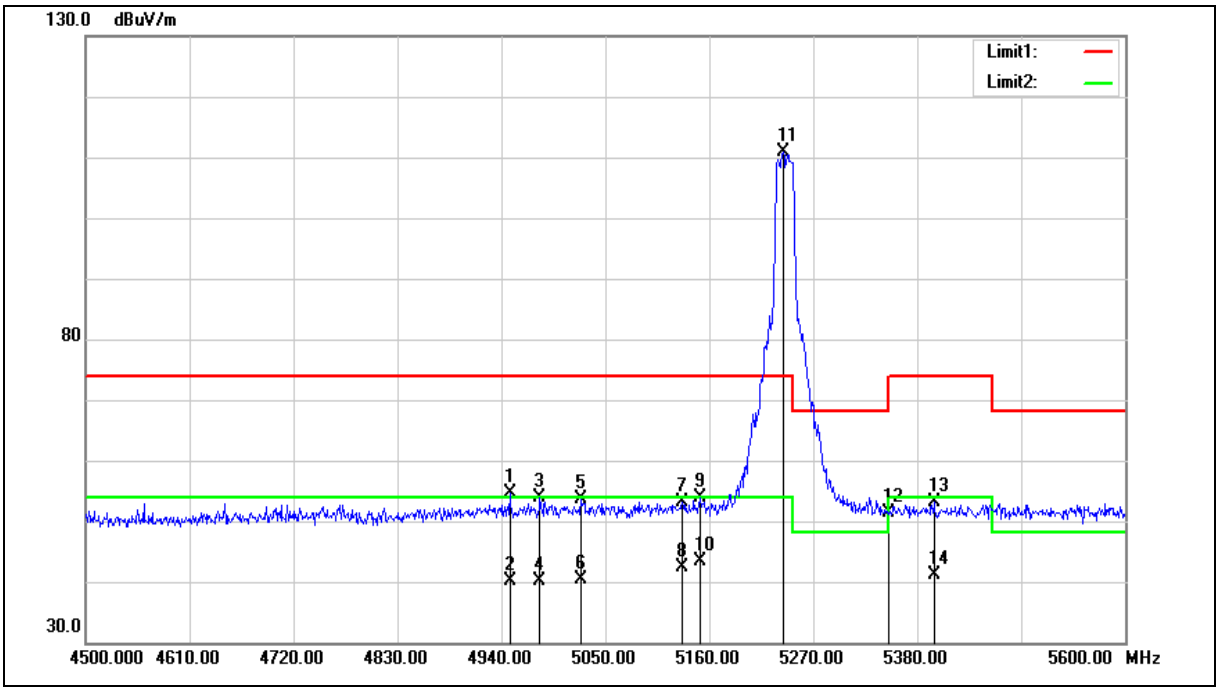

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5240 MHz		
Mode:	Mode 16		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4948.800	55.41	-0.90	54.51	74.00	-19.49	peak
2	4948.800	40.96	-0.90	40.06	54.00	-13.94	AVG
3	4980.700	54.72	-0.82	53.90	74.00	-20.10	peak
4	4980.700	40.94	-0.82	40.12	54.00	-13.88	AVG
5	5023.600	54.29	-0.72	53.57	74.00	-20.43	peak
6	5023.600	41.11	-0.72	40.39	54.00	-13.61	AVG
7	5131.400	53.68	-0.51	53.17	74.00	-20.83	peak
8	5131.400	42.98	-0.51	42.47	54.00	-11.53	AVG
9	5150.000	54.40	-0.48	53.92	74.00	-20.08	peak
10	5150.000	43.81	-0.48	43.33	54.00	-10.67	AVG
11	5238.100	111.25	-0.31	110.94	--	--	peak
12	5350.000	51.54	-0.08	51.46	74.00	-22.54	peak
13	5397.600	53.13	0.01	53.14	74.00	-20.86	peak
14	5397.600	41.14	0.01	41.15	54.00	-12.85	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5240 MHz		
Mode:	Mode 16		
Ant.Polar.:	Vertical		

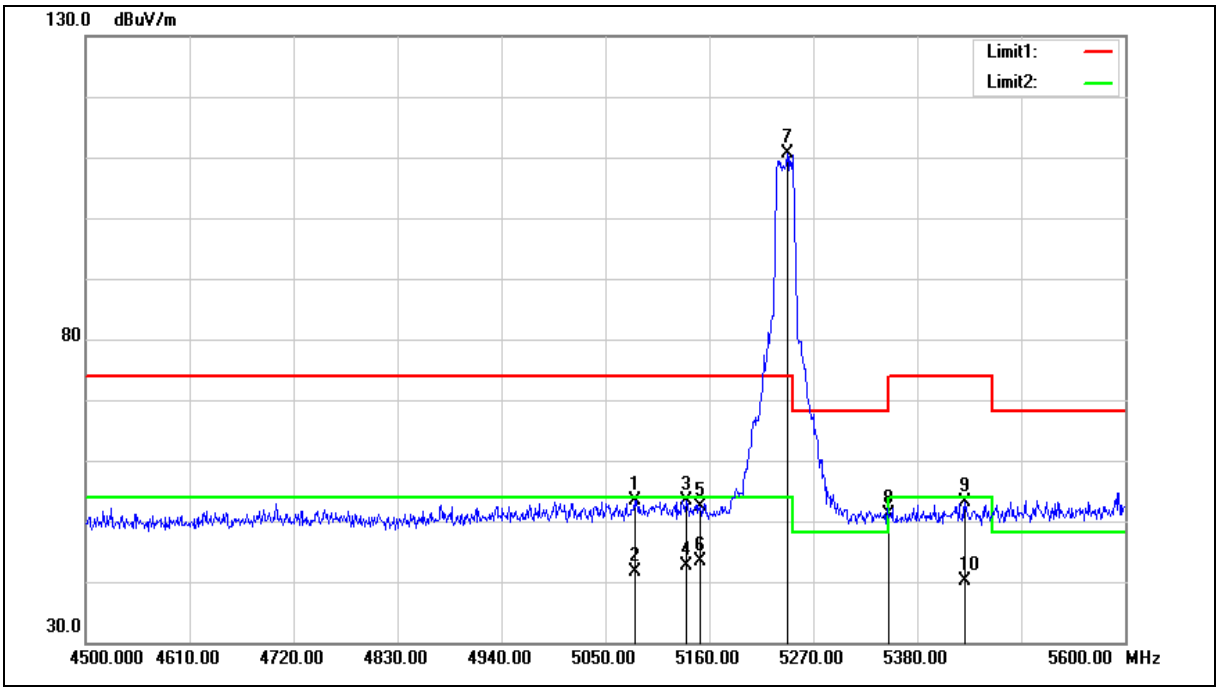

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5240 MHz		
Mode:	Mode 16		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5080.800	54.04	-0.61	53.43	74.00	-20.57	peak
2	5080.800	42.15	-0.61	41.54	54.00	-12.46	AVG
3	5135.800	53.95	-0.50	53.45	74.00	-20.55	peak
4	5135.800	43.01	-0.50	42.51	54.00	-11.49	AVG
5	5150.000	52.89	-0.48	52.41	74.00	-21.59	peak
6	5150.000	43.91	-0.48	43.43	54.00	-10.57	AVG
7	5242.500	110.88	-0.29	110.59	--	--	peak
8	5350.000	51.13	-0.08	51.05	74.00	-22.95	peak
9	5430.600	53.14	0.08	53.22	74.00	-20.78	peak
10	5430.600	40.03	0.08	40.11	54.00	-13.89	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5260 MHz		
Mode:	Mode 16		
Ant.Polar.:	Horizontal		

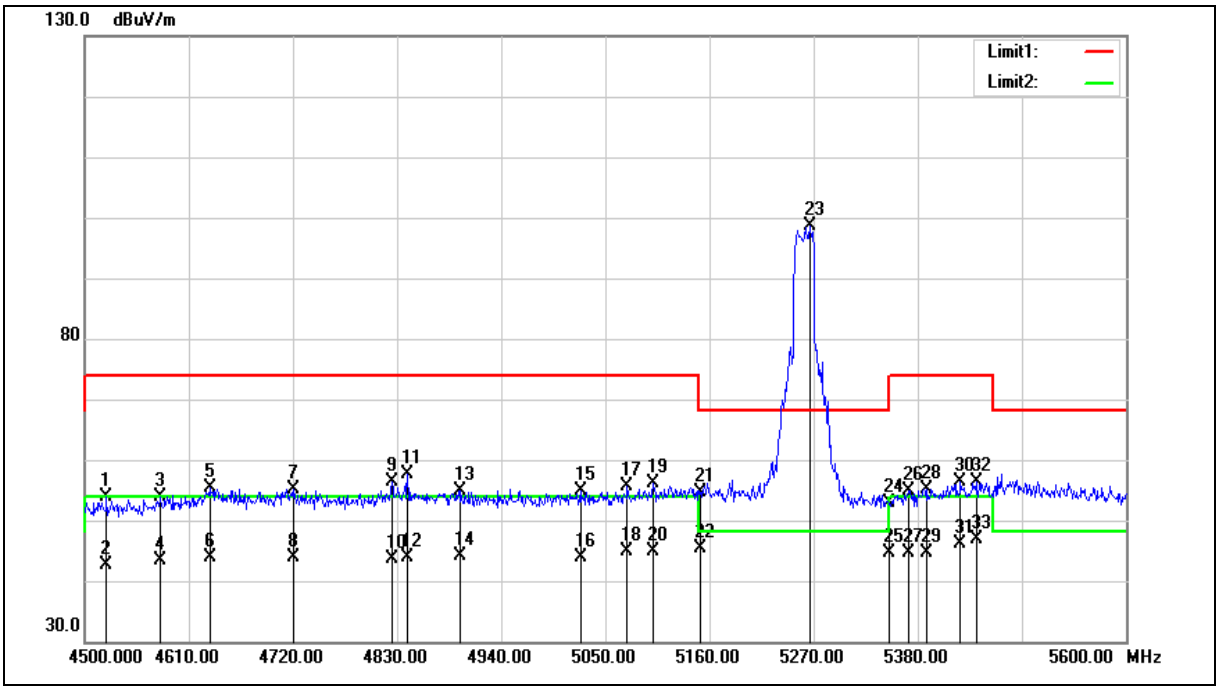

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5260 MHz		
Mode:	Mode 16		
Ant.Polar.:	Horizontal		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4523.100	50.37	3.55	53.92	74.00	-20.08	peak
2	4523.100	39.18	3.55	42.73	54.00	-11.27	AVG
3	4580.300	50.07	3.69	53.76	74.00	-20.24	peak
4	4580.300	39.76	3.69	43.45	54.00	-10.55	AVG
5	4632.000	51.56	3.81	55.37	74.00	-18.63	peak
6	4632.000	40.03	3.81	43.84	54.00	-10.16	AVG
7	4720.000	51.11	4.03	55.14	74.00	-18.86	peak
8	4720.000	39.90	4.03	43.93	54.00	-10.07	AVG
9	4824.500	51.95	4.31	56.26	74.00	-17.74	peak
10	4824.500	39.43	4.31	43.74	54.00	-10.26	AVG
11	4841.000	53.31	4.35	57.66	74.00	-16.34	peak
12	4841.000	39.48	4.35	43.83	54.00	-10.17	AVG
13	4897.100	50.40	4.50	54.90	74.00	-19.10	peak
14	4897.100	39.55	4.50	44.05	54.00	-9.95	AVG
15	5023.600	50.03	4.81	54.84	74.00	-19.16	peak
16	5023.600	39.08	4.81	43.89	54.00	-10.11	AVG
17	5073.100	50.62	4.93	55.55	74.00	-18.45	peak
18	5073.100	39.88	4.93	44.81	54.00	-9.19	AVG
19	5100.600	51.08	4.99	56.07	74.00	-17.93	peak
20	5100.600	39.96	4.99	44.95	54.00	-9.05	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5260 MHz		
Mode:	Mode 16		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
21	5150.000	49.58	5.12	54.70	74.00	-19.30	peak
22	5150.000	40.28	5.12	45.40	54.00	-8.60	AVG
23	5265.600	93.28	5.40	98.68	--	--	peak
24	5350.000	47.25	5.61	52.86	74.00	-21.14	peak
25	5350.000	39.11	5.61	44.72	54.00	-9.28	AVG
26	5370.100	49.30	5.66	54.96	74.00	-19.04	peak
27	5370.100	38.88	5.66	44.54	54.00	-9.46	AVG
28	5389.900	49.36	5.70	55.06	74.00	-18.94	peak
29	5389.900	38.85	5.70	44.55	54.00	-9.45	AVG
30	5425.100	50.53	5.80	56.33	74.00	-17.67	peak
31	5425.100	40.22	5.80	46.02	54.00	-7.98	AVG
32	5442.700	50.62	5.83	56.45	74.00	-17.55	peak
33	5442.700	40.97	5.83	46.80	54.00	-7.20	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5260 MHz		
Mode:	Mode 16		
Ant.Polar.:	Vertical		

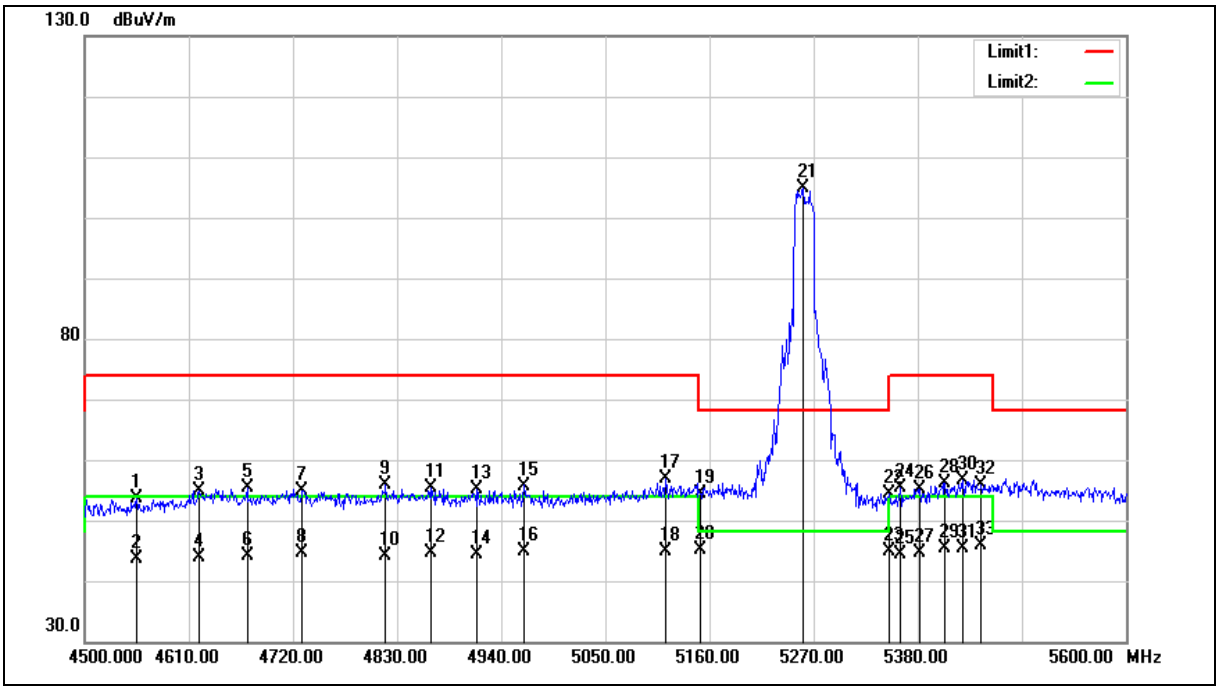

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5260 MHz		
Mode:	Mode 16		
Ant.Polar.:	Vertical		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4555.000	50.05	3.62	53.67	74.00	-20.33	peak
2	4555.000	39.99	3.62	43.61	54.00	-10.39	AVG
3	4621.000	51.08	3.78	54.86	74.00	-19.14	peak
4	4621.000	40.13	3.78	43.91	54.00	-10.09	AVG
5	4671.600	51.42	3.91	55.33	74.00	-18.67	peak
6	4671.600	40.15	3.91	44.06	54.00	-9.94	AVG
7	4729.900	50.90	4.07	54.97	74.00	-19.03	peak
8	4729.900	40.50	4.07	44.57	54.00	-9.43	AVG
9	4817.900	51.65	4.29	55.94	74.00	-18.06	peak
10	4817.900	39.96	4.29	44.25	54.00	-9.75	AVG
11	4865.200	50.96	4.41	55.37	74.00	-18.63	peak
12	4865.200	40.18	4.41	44.59	54.00	-9.41	AVG
13	4914.700	50.52	4.53	55.05	74.00	-18.95	peak
14	4914.700	39.78	4.53	44.31	54.00	-9.69	AVG
15	4964.200	51.10	4.65	55.75	74.00	-18.25	peak
16	4964.200	40.29	4.65	44.94	54.00	-9.06	AVG
17	5113.800	51.88	5.02	56.90	74.00	-17.10	peak
18	5113.800	39.96	5.02	44.98	54.00	-9.02	AVG
19	5150.000	49.18	5.12	54.30	74.00	-19.70	peak
20	5150.000	40.01	5.12	45.13	54.00	-8.87	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5260 MHz		
Mode:	Mode 16		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
21	5259.000	99.47	5.39	104.86	--	--	peak
22	5350.000	48.65	5.61	54.26	74.00	-19.74	peak
23	5350.000	39.28	5.61	44.89	54.00	-9.11	AVG
24	5361.300	49.64	5.64	55.28	74.00	-18.72	peak
25	5361.300	38.63	5.64	44.27	54.00	-9.73	AVG
26	5382.200	49.53	5.69	55.22	74.00	-18.78	peak
27	5382.200	38.95	5.69	44.64	54.00	-9.36	AVG
28	5408.600	50.40	5.76	56.16	74.00	-17.84	peak
29	5408.600	39.64	5.76	45.40	54.00	-8.60	AVG
30	5427.300	50.74	5.80	56.54	74.00	-17.46	peak
31	5427.300	39.59	5.80	45.39	54.00	-8.61	AVG
32	5447.100	50.05	5.84	55.89	74.00	-18.11	peak
33	5447.100	39.95	5.84	45.79	54.00	-8.21	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5280 MHz		
Mode:	Mode 16		
Ant.Polar.:	Horizontal		

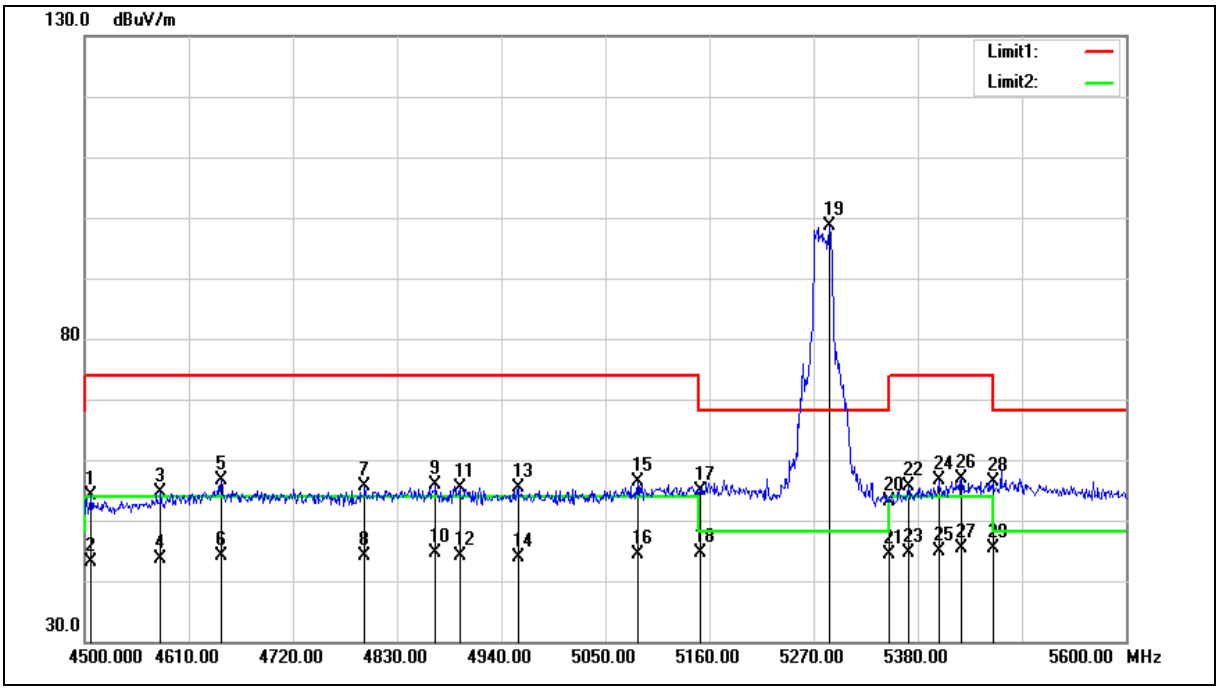

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5280 MHz		
Mode:	Mode 16		
Ant.Polar.:	Horizontal		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4506.600	50.67	3.49	54.16	74.00	-19.84	peak
2	4506.600	39.53	3.49	43.02	54.00	-10.98	AVG
3	4580.300	50.82	3.69	54.51	74.00	-19.49	peak
4	4580.300	39.83	3.69	43.52	54.00	-10.48	AVG
5	4644.100	52.83	3.84	56.67	74.00	-17.33	peak
6	4644.100	40.18	3.84	44.02	54.00	-9.98	AVG
7	4795.900	51.28	4.23	55.51	74.00	-18.49	peak
8	4795.900	39.91	4.23	44.14	54.00	-9.86	AVG
9	4870.700	51.34	4.42	55.76	74.00	-18.24	peak
10	4870.700	40.12	4.42	44.54	54.00	-9.46	AVG
11	4896.000	50.81	4.49	55.30	74.00	-18.70	peak
12	4896.000	39.74	4.49	44.23	54.00	-9.77	AVG
13	4957.600	50.78	4.64	55.42	74.00	-18.58	peak
14	4957.600	39.22	4.64	43.86	54.00	-10.14	AVG
15	5084.100	51.50	4.96	56.46	74.00	-17.54	peak
16	5084.100	39.42	4.96	44.38	54.00	-9.62	AVG
17	5150.000	49.75	5.12	54.87	74.00	-19.13	peak
18	5150.000	39.54	5.12	44.66	54.00	-9.34	AVG
19	5286.500	93.21	5.46	98.67	--	--	peak
20	5350.000	47.58	5.61	53.19	74.00	-20.81	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5280 MHz		
Mode:	Mode 16		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
21	5350.000	38.77	5.61	44.38	54.00	-9.62	AVG
22	5370.100	49.92	5.66	55.58	74.00	-18.42	peak
23	5370.100	39.01	5.66	44.67	54.00	-9.33	AVG
24	5402.000	50.80	5.73	56.53	74.00	-17.47	peak
25	5402.000	39.11	5.73	44.84	54.00	-9.16	AVG
26	5426.200	51.02	5.80	56.82	74.00	-17.18	peak
27	5426.200	39.52	5.80	45.32	54.00	-8.68	AVG
28	5459.200	50.61	5.88	56.49	74.00	-17.51	peak
29	5459.200	39.62	5.88	45.50	54.00	-8.50	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5280 MHz		
Mode:	Mode 16		
Ant.Polar.:	Vertical		

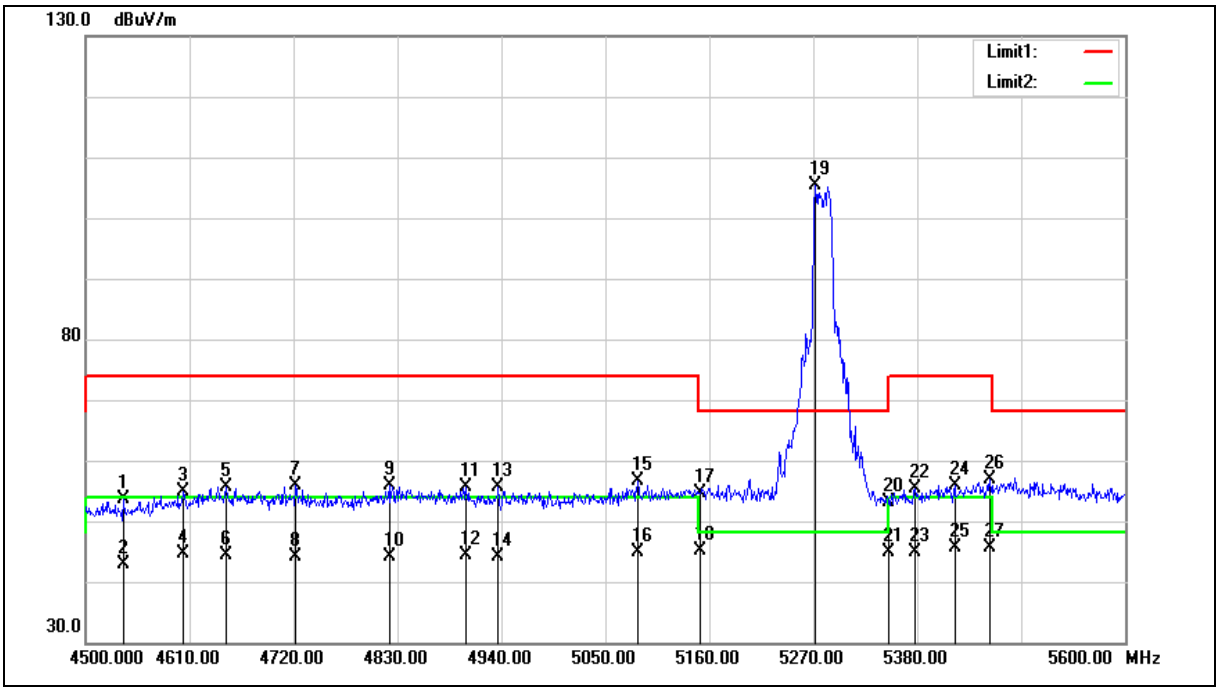

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5280 MHz		
Mode:	Mode 16		
Ant.Polar.:	Vertical		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4539.600	50.05	3.58	53.63	74.00	-20.37	peak
2	4539.600	39.27	3.58	42.85	54.00	-11.15	AVG
3	4603.400	51.12	3.74	54.86	74.00	-19.14	peak
4	4603.400	40.79	3.74	44.53	54.00	-9.47	AVG
5	4648.500	51.77	3.86	55.63	74.00	-18.37	peak
6	4648.500	40.63	3.86	44.49	54.00	-9.51	AVG
7	4722.200	51.95	4.05	56.00	74.00	-18.00	peak
8	4722.200	40.09	4.05	44.14	54.00	-9.86	AVG
9	4821.200	51.59	4.29	55.88	74.00	-18.12	peak
10	4821.200	39.76	4.29	44.05	54.00	-9.95	AVG
11	4902.600	51.19	4.50	55.69	74.00	-18.31	peak
12	4902.600	39.85	4.50	44.35	54.00	-9.65	AVG
13	4936.700	50.96	4.59	55.55	74.00	-18.45	peak
14	4936.700	39.65	4.59	44.24	54.00	-9.76	AVG
15	5084.100	51.76	4.96	56.72	74.00	-17.28	peak
16	5084.100	39.81	4.96	44.77	54.00	-9.23	AVG
17	5150.000	49.42	5.12	54.54	74.00	-19.46	peak
18	5150.000	40.05	5.12	45.17	54.00	-8.83	AVG
19	5272.200	100.01	5.42	105.43	--	--	peak
20	5350.000	47.44	5.61	53.05	74.00	-20.95	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5280 MHz		
Mode:	Mode 16		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
21	5350.000	39.28	5.61	44.89	54.00	-9.11	AVG
22	5377.800	49.78	5.67	55.45	74.00	-18.55	peak
23	5377.800	39.20	5.67	44.87	54.00	-9.13	AVG
24	5419.600	50.15	5.79	55.94	74.00	-18.06	peak
25	5419.600	39.72	5.79	45.51	54.00	-8.49	AVG
26	5457.000	50.90	5.87	56.77	74.00	-17.23	peak
27	5457.000	39.81	5.87	45.68	54.00	-8.32	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5320 MHz		
Mode:	Mode 16		
Ant.Polar.:	Horizontal		

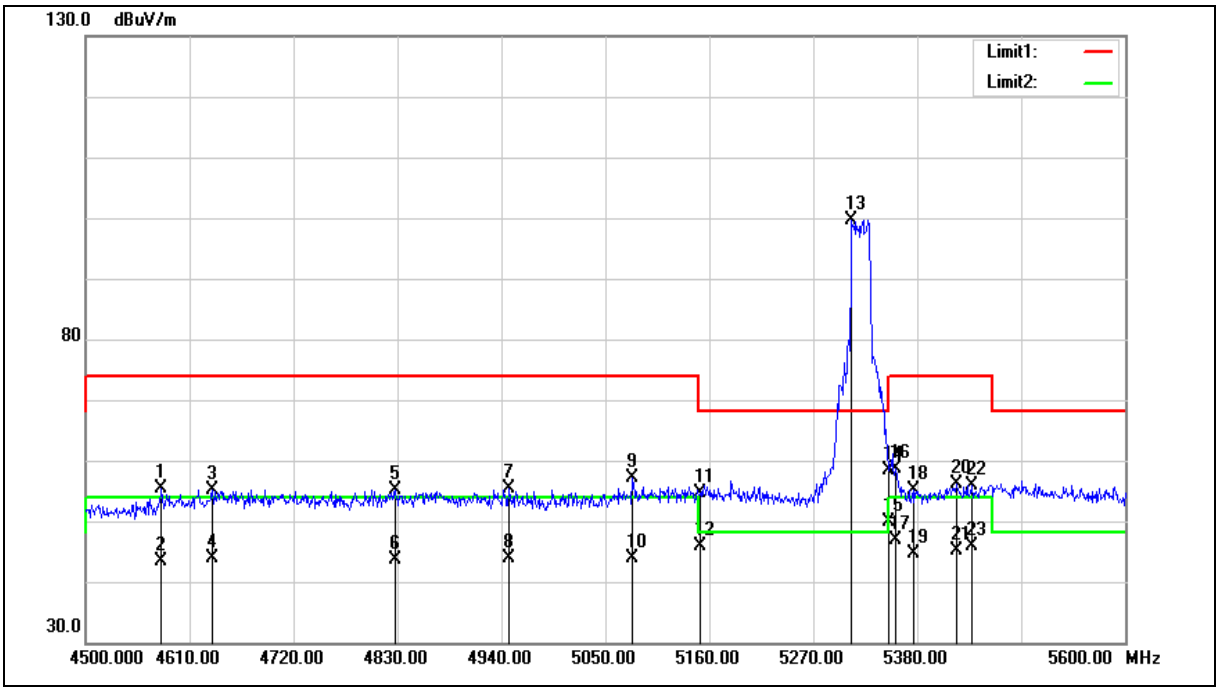

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5320 MHz		
Mode:	Mode 16		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4580.300	51.62	3.69	55.31	74.00	-18.69	peak
2	4580.300	39.64	3.69	43.33	54.00	-10.67	AVG
3	4634.200	51.41	3.81	55.22	74.00	-18.78	peak
4	4634.200	40.18	3.81	43.99	54.00	-10.01	AVG
5	4827.800	50.82	4.31	55.13	74.00	-18.87	peak
6	4827.800	39.31	4.31	43.62	54.00	-10.38	AVG
7	4947.700	50.64	4.62	55.26	74.00	-18.74	peak
8	4947.700	39.20	4.62	43.82	54.00	-10.18	AVG
9	5078.600	52.09	4.94	57.03	74.00	-16.97	peak
10	5078.600	38.82	4.94	43.76	54.00	-10.24	AVG
11	5150.000	49.49	5.12	54.61	74.00	-19.39	peak
12	5150.000	40.79	5.12	45.91	54.00	-8.09	AVG
13	5310.700	94.08	5.51	99.59	--	--	peak
14	5350.000	52.77	5.61	58.38	74.00	-15.62	peak
15	5350.000	44.20	5.61	49.81	54.00	-4.19	AVG
16	5356.900	53.02	5.63	58.65	74.00	-15.35	peak
17	5356.900	41.17	5.63	46.80	54.00	-7.20	AVG
18	5375.600	49.48	5.67	55.15	74.00	-18.85	peak
19	5375.600	38.87	5.67	44.54	54.00	-9.46	AVG
20	5421.800	50.35	5.79	56.14	74.00	-17.86	peak
21	5421.800	39.39	5.79	45.18	54.00	-8.82	AVG
22	5438.300	50.17	5.82	55.99	74.00	-18.01	peak
23	5438.300	40.12	5.82	45.94	54.00	-8.06	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5320 MHz		
Mode:	Mode 16		
Ant.Polar.:	Vertical		

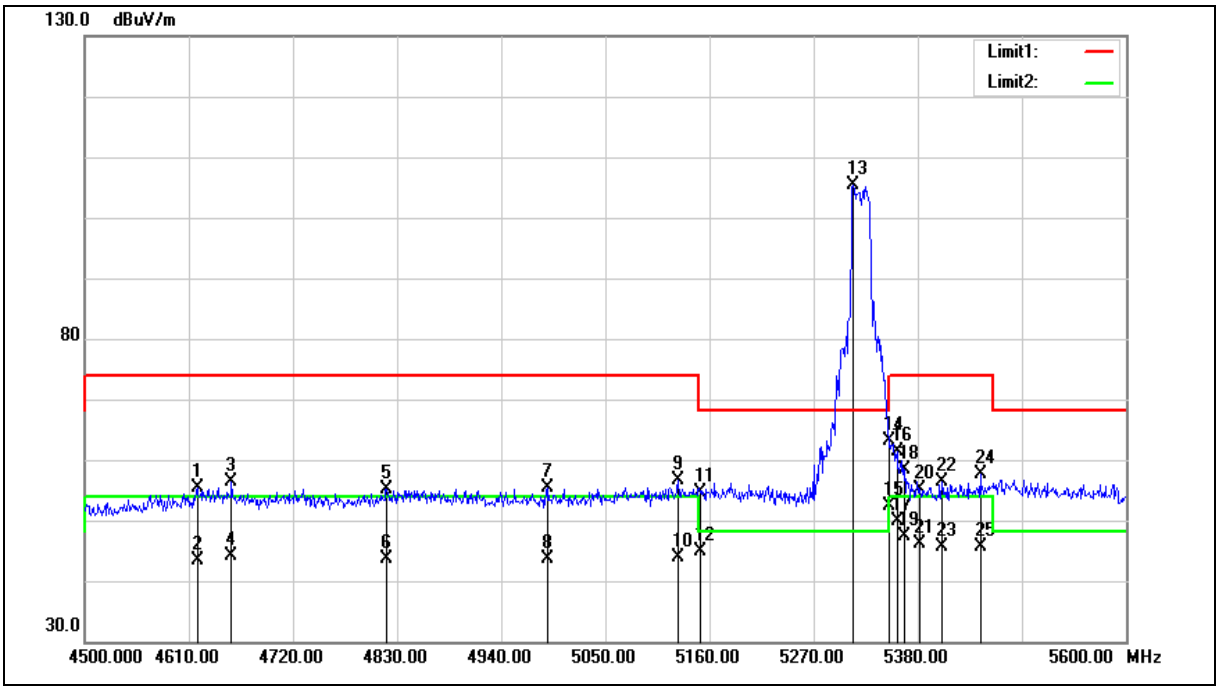

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5320 MHz		
Mode:	Mode 16		
Ant.Polar.:	Vertical		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4618.800	51.65	3.78	55.43	74.00	-18.57	peak
2	4618.800	39.59	3.78	43.37	54.00	-10.63	AVG
3	4655.100	52.40	3.88	56.28	74.00	-17.72	peak
4	4655.100	40.14	3.88	44.02	54.00	-9.98	AVG
5	4819.000	50.94	4.29	55.23	74.00	-18.77	peak
6	4819.000	39.41	4.29	43.70	54.00	-10.30	AVG
7	4989.500	50.58	4.72	55.30	74.00	-18.70	peak
8	4989.500	39.03	4.72	43.75	54.00	-10.25	AVG
9	5127.000	51.48	5.06	56.54	74.00	-17.46	peak
10	5127.000	38.89	5.06	43.95	54.00	-10.05	AVG
11	5150.000	49.41	5.12	54.53	74.00	-19.47	peak
12	5150.000	39.87	5.12	44.99	54.00	-9.01	AVG
13	5311.800	99.97	5.51	105.48	--	--	peak
14	5350.000	57.52	5.61	63.13	74.00	-10.87	peak
15	5350.000	46.88	5.61	52.49	54.00	-1.51	AVG
16	5358.000	55.69	5.63	61.32	74.00	-12.68	peak
17	5358.000	44.23	5.63	49.86	54.00	-4.14	AVG
18	5365.700	52.79	5.65	58.44	74.00	-15.56	peak
19	5365.700	41.70	5.65	47.35	54.00	-6.65	AVG
20	5382.200	49.42	5.69	55.11	74.00	-18.89	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5320 MHz		
Mode:	Mode 16		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
21	5382.200	40.36	5.69	46.05	54.00	-7.95	AVG
22	5405.300	50.70	5.74	56.44	74.00	-17.56	peak
23	5405.300	39.79	5.74	45.53	54.00	-8.47	AVG
24	5446.000	51.85	5.84	57.69	74.00	-16.31	peak
25	5446.000	39.90	5.84	45.74	54.00	-8.26	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5500 MHz		
Mode:	Mode 16		
Ant.Polar.:	Horizontal		

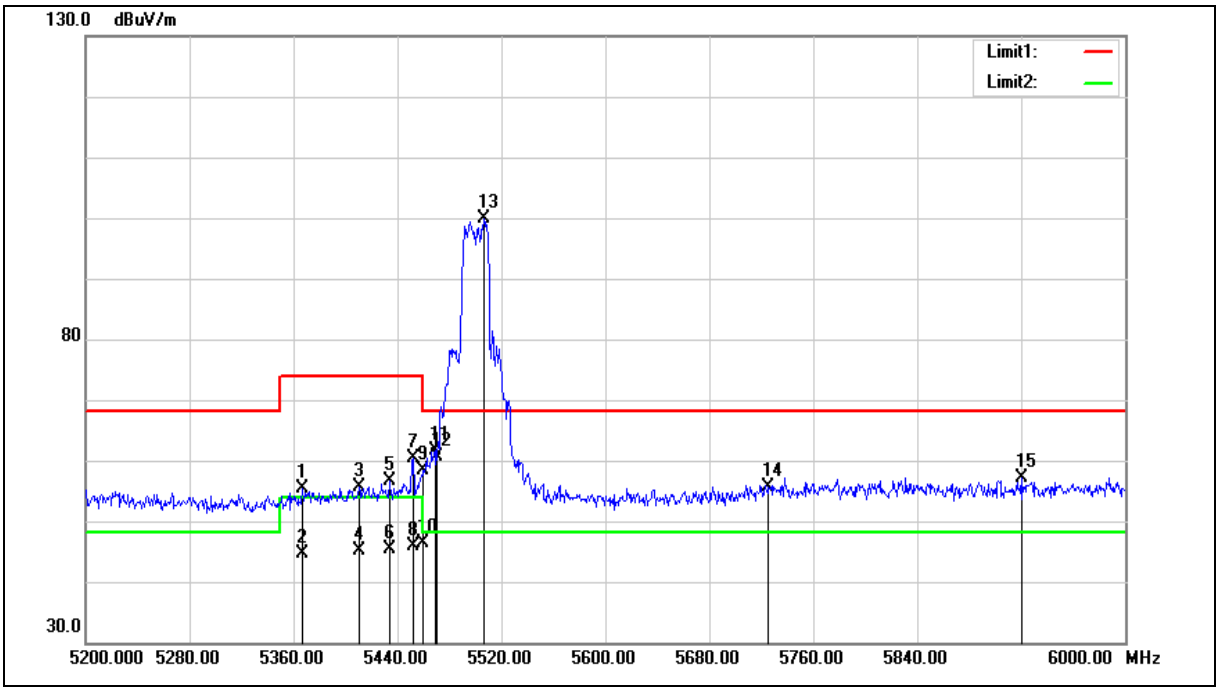

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5500 MHz		
Mode:	Mode 16		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5366.400	49.66	5.65	55.31	74.00	-18.69	peak
2	5366.400	39.01	5.65	44.66	54.00	-9.34	AVG
3	5410.400	49.98	5.76	55.74	74.00	-18.26	peak
4	5410.400	39.33	5.76	45.09	54.00	-8.91	AVG
5	5433.600	50.92	5.81	56.73	74.00	-17.27	peak
6	5433.600	39.51	5.81	45.32	54.00	-8.68	AVG
7	5452.000	54.64	5.85	60.49	74.00	-13.51	peak
8	5452.000	40.04	5.85	45.89	54.00	-8.11	AVG
9	5460.000	52.47	5.88	58.35	74.00	-15.65	peak
10	5460.000	40.42	5.88	46.30	54.00	-7.70	AVG
11	5468.800	55.65	5.90	61.55	68.20	-6.65	peak
12	5470.000	54.61	5.91	60.52	68.20	-7.68	peak
13	5506.400	93.84	5.99	99.83	--	--	peak
14	5725.000	49.05	6.47	55.52	68.20	-12.68	peak
15	5920.000	50.14	6.91	57.05	68.20	-11.15	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5500 MHz		
Mode:	Mode 16		
Ant.Polar.:	Vertical		

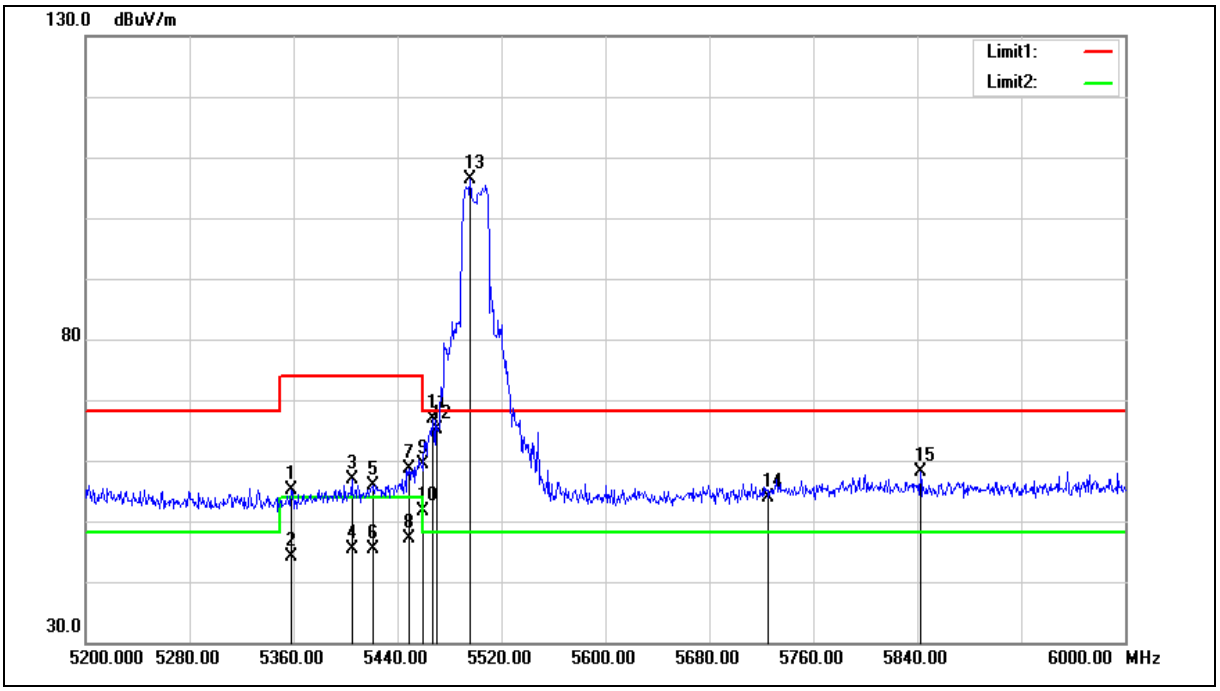

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5500 MHz		
Mode:	Mode 16		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5358.400	49.60	5.64	55.24	74.00	-18.76	peak
2	5358.400	38.44	5.64	44.08	54.00	-9.92	AVG
3	5404.800	51.12	5.74	56.86	74.00	-17.14	peak
4	5404.800	39.56	5.74	45.30	54.00	-8.70	AVG
5	5420.800	50.21	5.79	56.00	74.00	-18.00	peak
6	5420.800	39.64	5.79	45.43	54.00	-8.57	AVG
7	5448.800	52.87	5.85	58.72	74.00	-15.28	peak
8	5448.800	41.40	5.85	47.25	54.00	-6.75	AVG
9	5460.000	53.49	5.88	59.37	74.00	-14.63	peak
10	5460.000	45.67	5.88	51.55	54.00	-2.45	AVG
11	5467.200	60.88	5.89	66.77	68.20	-1.43	peak
12	5470.000	59.11	5.91	65.02	68.20	-3.18	peak
13	5496.000	100.30	5.97	106.27	--	--	peak
14	5725.000	47.45	6.47	53.92	68.20	-14.28	peak
15	5842.400	51.48	6.74	58.22	68.20	-9.98	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5560 MHz		
Mode:	Mode 16		
Ant.Polar.:	Horizontal		

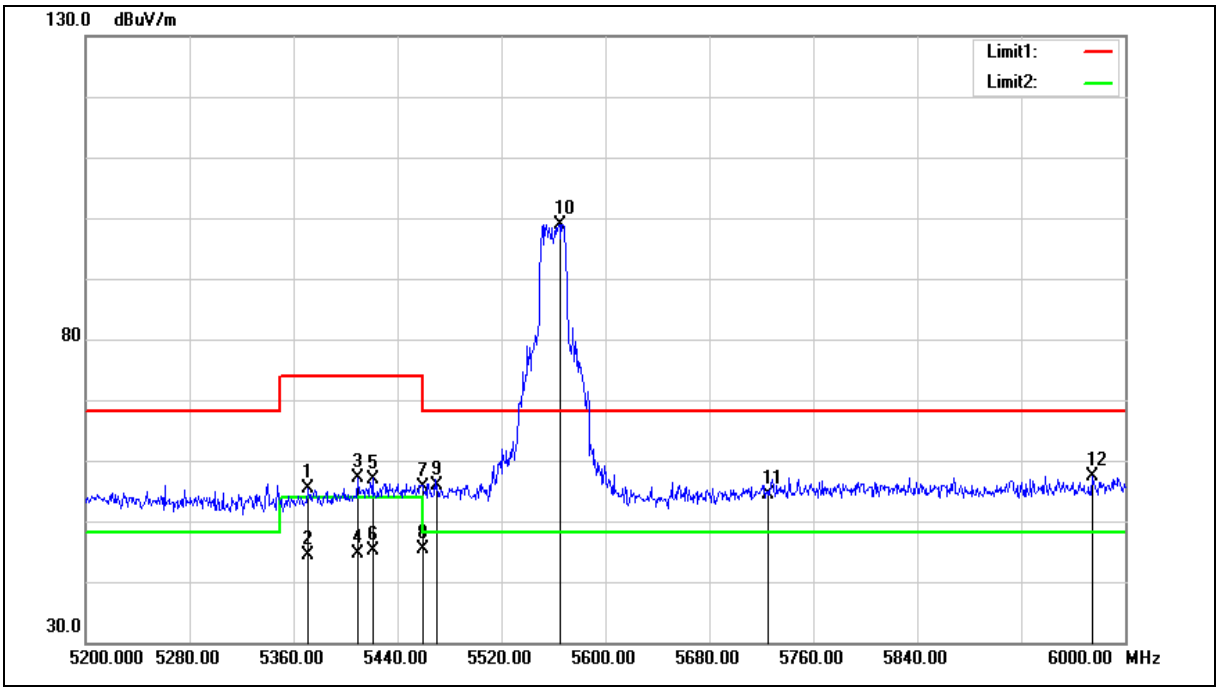

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5560 MHz		
Mode:	Mode 16		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5371.200	49.77	5.66	55.43	74.00	-18.57	peak
2	5371.200	38.63	5.66	44.29	54.00	-9.71	AVG
3	5409.600	51.42	5.76	57.18	74.00	-16.82	peak
4	5409.600	38.75	5.76	44.51	54.00	-9.49	AVG
5	5420.800	51.21	5.79	57.00	74.00	-17.00	peak
6	5420.800	39.30	5.79	45.09	54.00	-8.91	AVG
7	5460.000	49.77	5.88	55.65	74.00	-18.35	peak
8	5460.000	39.58	5.88	45.46	54.00	-8.54	AVG
9	5470.000	49.91	5.91	55.82	68.20	-12.38	peak
10	5564.800	92.88	6.12	99.00	--	--	peak
11	5725.000	47.86	6.47	54.33	68.20	-13.87	peak
12	5974.400	50.34	7.02	57.36	68.20	-10.84	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5560 MHz		
Mode:	Mode 16		
Ant.Polar.:	Vertical		

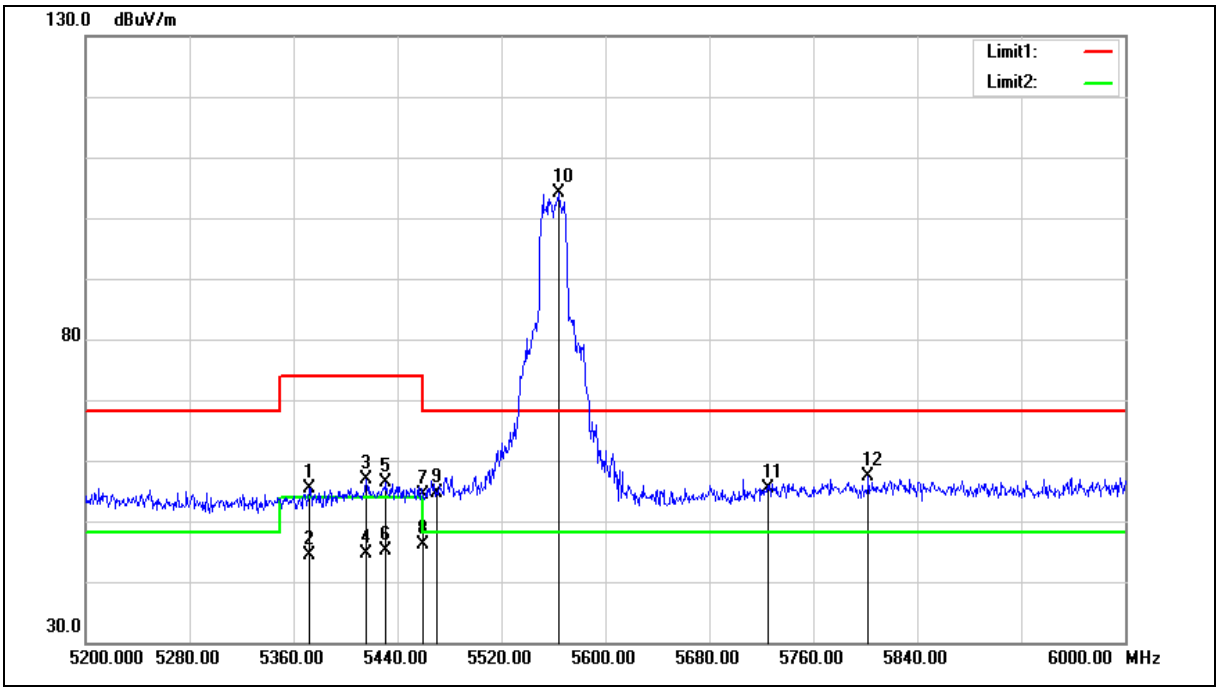

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5560 MHz		
Mode:	Mode 16		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5372.000	49.75	5.66	55.41	74.00	-18.59	peak
2	5372.000	38.66	5.66	44.32	54.00	-9.68	AVG
3	5416.000	51.20	5.77	56.97	74.00	-17.03	peak
4	5416.000	38.80	5.77	44.57	54.00	-9.43	AVG
5	5431.200	50.60	5.81	56.41	74.00	-17.59	peak
6	5431.200	39.31	5.81	45.12	54.00	-8.88	AVG
7	5460.000	48.40	5.88	54.28	74.00	-19.72	peak
8	5460.000	40.15	5.88	46.03	54.00	-7.97	AVG
9	5470.000	48.80	5.91	54.71	68.20	-13.49	peak
10	5564.000	98.04	6.12	104.16	--	--	peak
11	5725.000	48.97	6.47	55.44	68.20	-12.76	peak
12	5802.400	50.69	6.65	57.34	68.20	-10.86	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5700 MHz		
Mode:	Mode 16		
Ant.Polar.:	Horizontal		

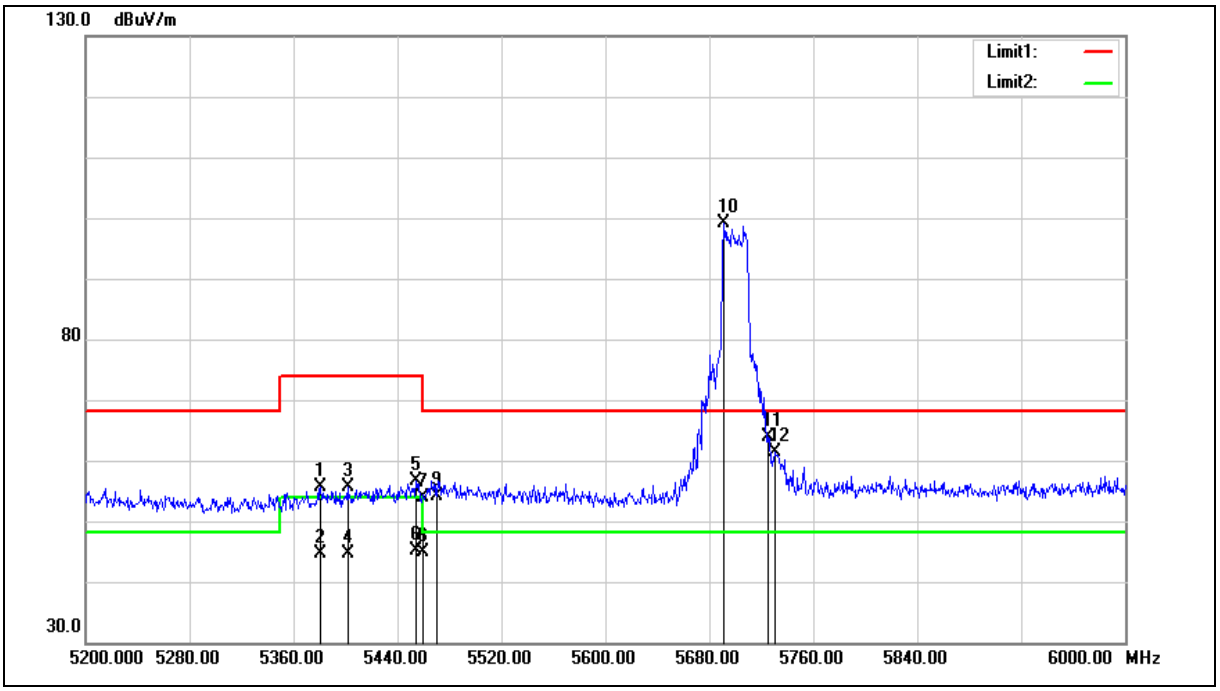

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5700 MHz		
Mode:	Mode 16		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5380.800	49.99	5.68	55.67	74.00	-18.33	peak
2	5380.800	38.86	5.68	44.54	54.00	-9.46	AVG
3	5401.600	49.92	5.73	55.65	74.00	-18.35	peak
4	5401.600	38.94	5.73	44.67	54.00	-9.33	AVG
5	5454.400	50.73	5.86	56.59	74.00	-17.41	peak
6	5454.400	39.19	5.86	45.05	54.00	-8.95	AVG
7	5460.000	47.99	5.88	53.87	74.00	-20.13	peak
8	5460.000	39.08	5.88	44.96	54.00	-9.04	AVG
9	5470.000	48.11	5.91	54.02	68.20	-14.18	peak
10	5691.200	92.69	6.41	99.10	--	--	peak
11	5725.000	57.30	6.47	63.77	68.20	-4.43	peak
12	5730.400	54.98	6.49	61.47	68.20	-6.73	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5700 MHz		
Mode:	Mode 16		
Ant.Polar.:	Vertical		

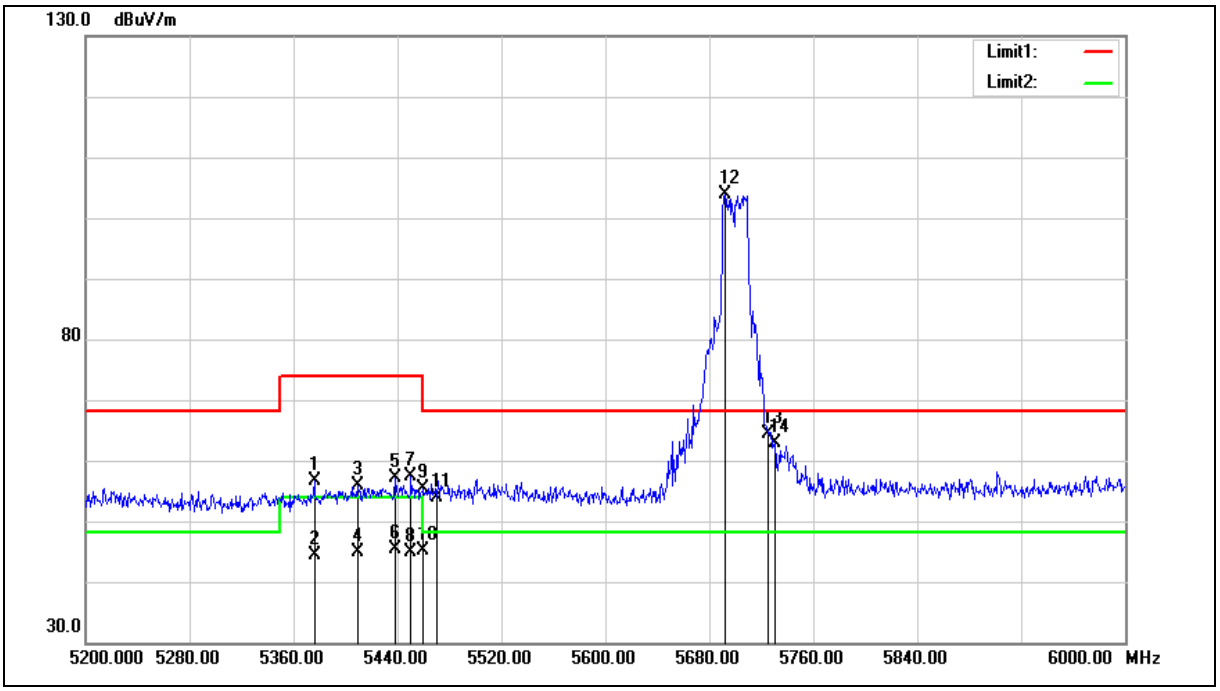

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5700 MHz		
Mode:	Mode 16		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5376.000	50.91	5.67	56.58	74.00	-17.42	peak
2	5376.000	38.80	5.67	44.47	54.00	-9.53	AVG
3	5409.600	50.09	5.76	55.85	74.00	-18.15	peak
4	5409.600	39.10	5.76	44.86	54.00	-9.14	AVG
5	5438.400	51.24	5.82	57.06	74.00	-16.94	peak
6	5438.400	39.54	5.82	45.36	54.00	-8.64	AVG
7	5450.400	51.43	5.85	57.28	74.00	-16.72	peak
8	5450.400	39.11	5.85	44.96	54.00	-9.04	AVG
9	5460.000	49.40	5.88	55.28	74.00	-18.72	peak
10	5460.000	39.24	5.88	45.12	54.00	-8.88	AVG
11	5470.000	47.99	5.91	53.90	68.20	-14.30	peak
12	5692.000	97.48	6.41	103.89	--	--	peak
13	5725.000	57.86	6.47	64.33	68.20	-3.87	peak
14	5730.400	56.49	6.49	62.98	68.20	-5.22	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5745 MHz		
Mode:	Mode 16		
Ant.Polar.:	Horizontal		

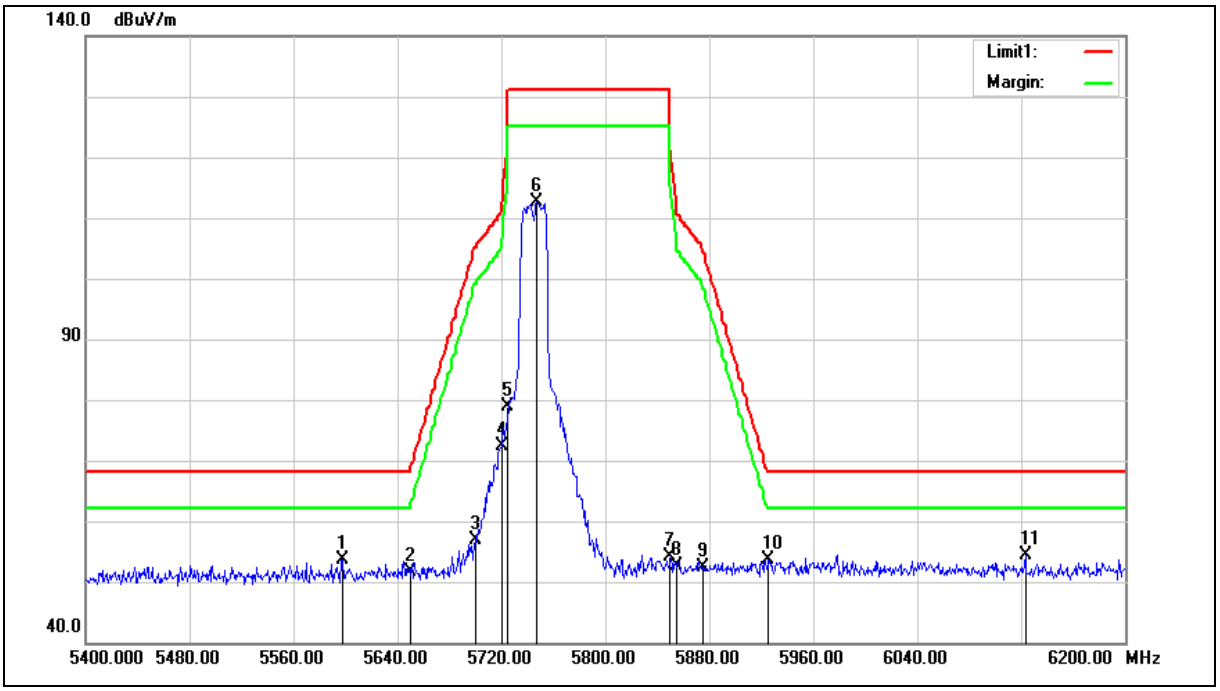

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5745 MHz		
Mode:	Mode 16		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5597.600	53.23	0.48	53.71	68.20	-14.49	peak
2	5650.000	50.95	0.62	51.57	68.20	-16.63	peak
3	5700.000	56.23	0.75	56.98	105.20	-48.22	peak
4	5720.000	71.59	0.81	72.40	110.80	-38.40	peak
5	5725.000	78.11	0.82	78.93	122.20	-43.27	peak
6	5747.200	111.78	0.89	112.67	--	--	peak
7	5850.000	52.89	1.17	54.06	122.20	-68.14	peak
8	5855.000	51.42	1.18	52.60	110.80	-58.20	peak
9	5875.000	51.12	1.23	52.35	105.20	-52.85	peak
10	5925.000	52.37	1.37	53.74	68.20	-14.46	peak
11	6123.200	52.37	2.01	54.38	68.20	-13.82	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5745 MHz		
Mode:	Mode 16		
Ant.Polar.:	Vertical		

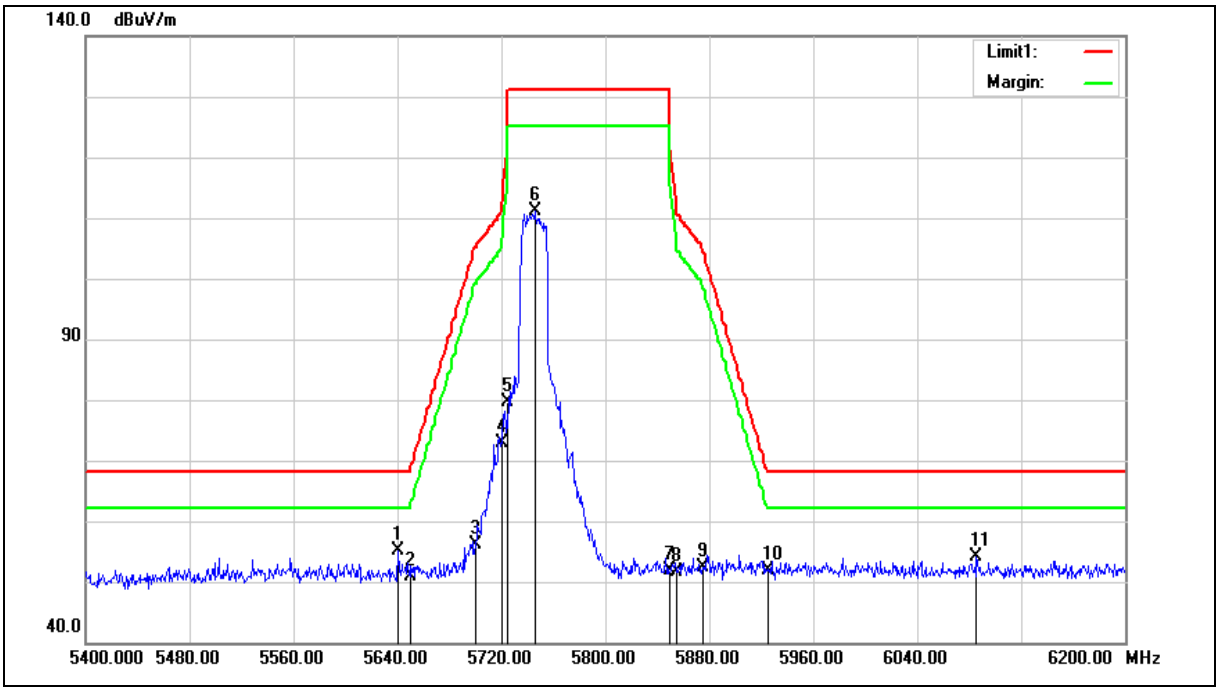

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5745 MHz		
Mode:	Mode 16		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5640.000	54.65	0.59	55.24	68.20	-12.96	peak
2	5650.000	50.27	0.62	50.89	68.20	-17.31	peak
3	5700.000	55.28	0.75	56.03	105.20	-49.17	peak
4	5720.000	71.95	0.81	72.76	110.80	-38.04	peak
5	5725.000	78.75	0.82	79.57	122.20	-42.63	peak
6	5745.600	110.32	0.87	111.19	--	--	peak
7	5850.000	50.78	1.17	51.95	122.20	-70.25	peak
8	5855.000	50.51	1.18	51.69	110.80	-59.11	peak
9	5875.000	51.17	1.23	52.40	105.20	-52.80	peak
10	5925.000	50.45	1.37	51.82	68.20	-16.38	peak
11	6085.600	52.22	1.88	54.10	68.20	-14.10	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5785 MHz		
Mode:	Mode 16		
Ant.Polar.:	Horizontal		

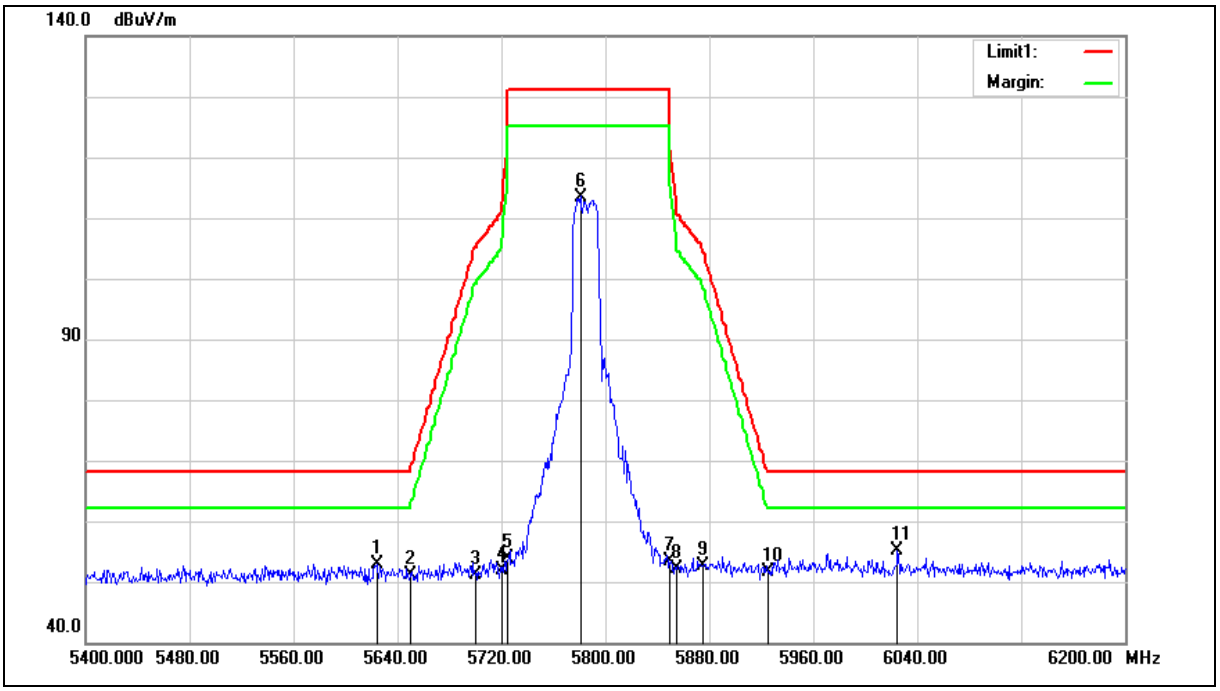

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5785 MHz		
Mode:	Mode 16		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5624.000	52.30	0.55	52.85	68.20	-15.35	peak
2	5650.000	50.60	0.62	51.22	68.20	-16.98	peak
3	5700.000	50.38	0.75	51.13	105.20	-54.07	peak
4	5720.000	51.14	0.81	51.95	110.80	-58.85	peak
5	5725.000	53.01	0.82	53.83	122.20	-68.37	peak
6	5780.800	112.38	0.98	113.36	--	--	peak
7	5850.000	52.11	1.17	53.28	122.20	-68.92	peak
8	5855.000	50.93	1.18	52.11	110.80	-58.69	peak
9	5875.000	51.43	1.23	52.66	105.20	-52.54	peak
10	5925.000	50.17	1.37	51.54	68.20	-16.66	peak
11	6024.800	53.38	1.65	55.03	68.20	-13.17	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5785 MHz		
Mode:	Mode 16		
Ant.Polar.:	Vertical		

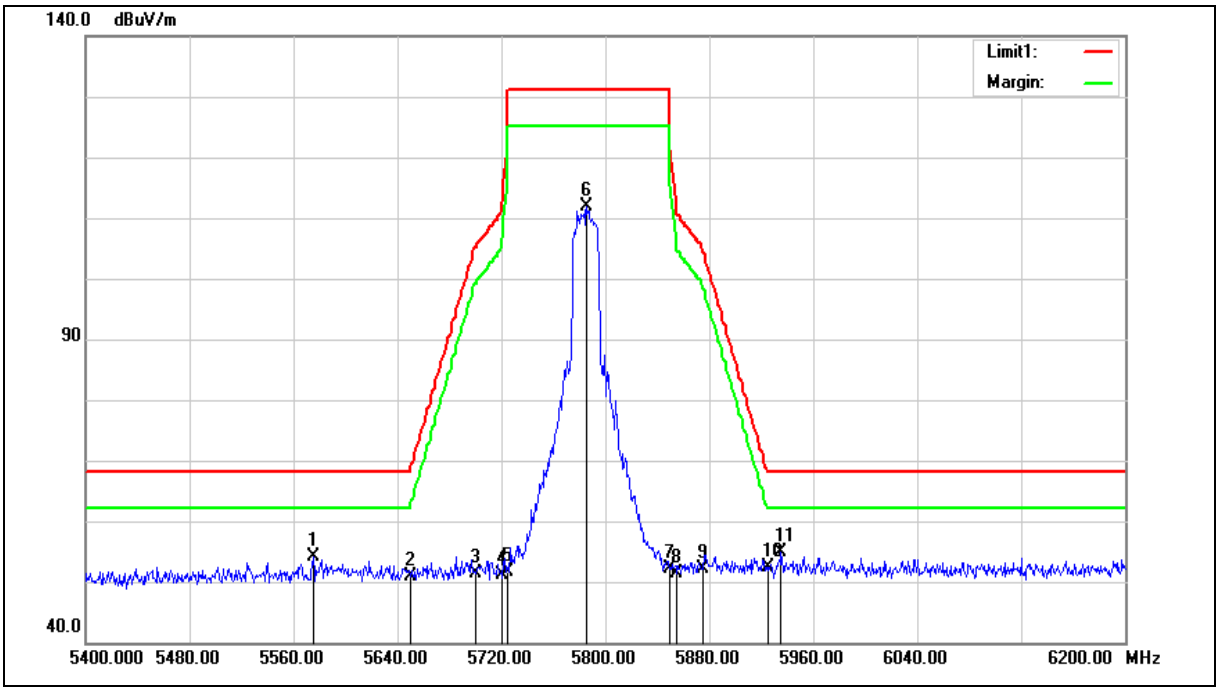

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5785 MHz		
Mode:	Mode 16		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5575.200	53.72	0.42	54.14	68.20	-14.06	peak
2	5650.000	50.26	0.62	50.88	68.20	-17.32	peak
3	5700.000	50.74	0.75	51.49	105.20	-53.71	peak
4	5720.000	50.25	0.81	51.06	110.80	-59.74	peak
5	5725.000	50.74	0.82	51.56	122.20	-70.64	peak
6	5785.600	110.83	0.99	111.82	--	--	peak
7	5850.000	51.00	1.17	52.17	122.20	-70.03	peak
8	5855.000	50.12	1.18	51.30	110.80	-59.50	peak
9	5875.000	50.97	1.23	52.20	105.20	-53.00	peak
10	5925.000	51.06	1.37	52.43	68.20	-15.77	peak
11	5935.200	53.58	1.40	54.98	68.20	-13.22	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5825 MHz		
Mode:	Mode 16		
Ant.Polar.:	Horizontal		

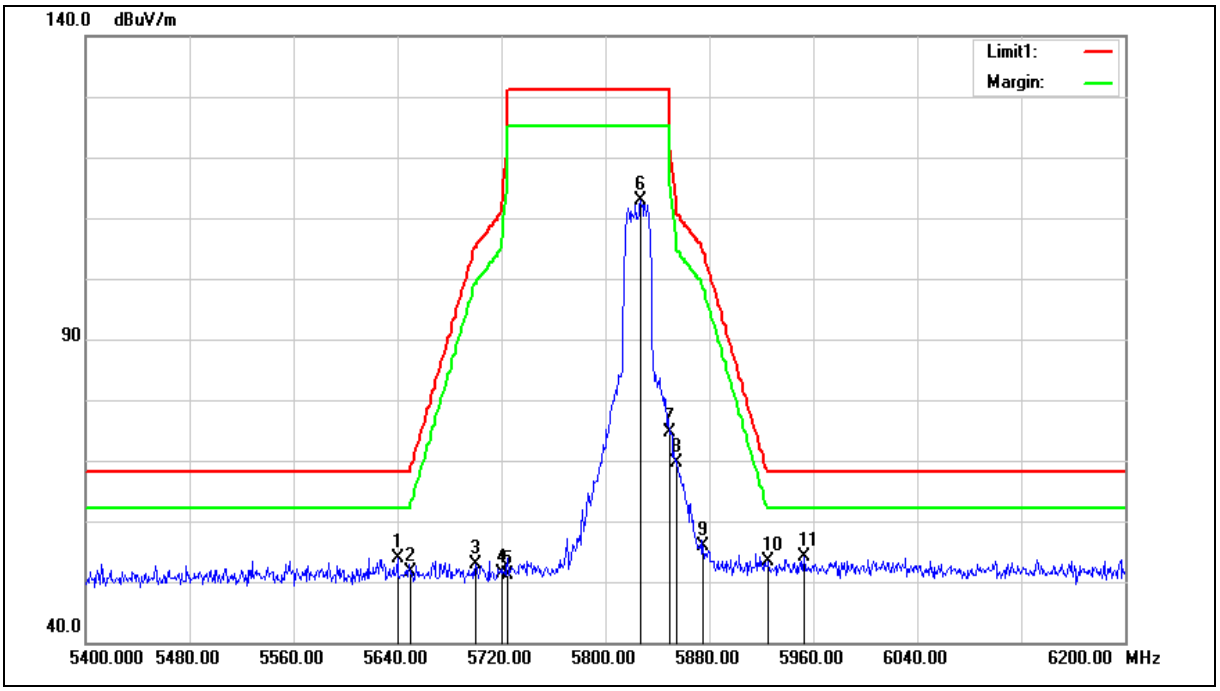

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5825 MHz		
Mode:	Mode 16		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5640.000	53.21	0.59	53.80	68.20	-14.40	peak
2	5650.000	50.97	0.62	51.59	68.20	-16.61	peak
3	5700.000	52.24	0.75	52.99	105.20	-52.21	peak
4	5720.000	50.65	0.81	51.46	110.80	-59.34	peak
5	5725.000	50.40	0.82	51.22	122.20	-70.98	peak
6	5827.200	111.66	1.10	112.76	--	--	peak
7	5850.000	73.47	1.17	74.64	122.20	-47.56	peak
8	5855.000	68.41	1.18	69.59	110.80	-41.21	peak
9	5875.000	54.63	1.23	55.86	105.20	-49.34	peak
10	5925.000	51.89	1.37	53.26	68.20	-14.94	peak
11	5952.800	52.63	1.44	54.07	68.20	-14.13	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5825 MHz		
Mode:	Mode 16		
Ant.Polar.:	Vertical		

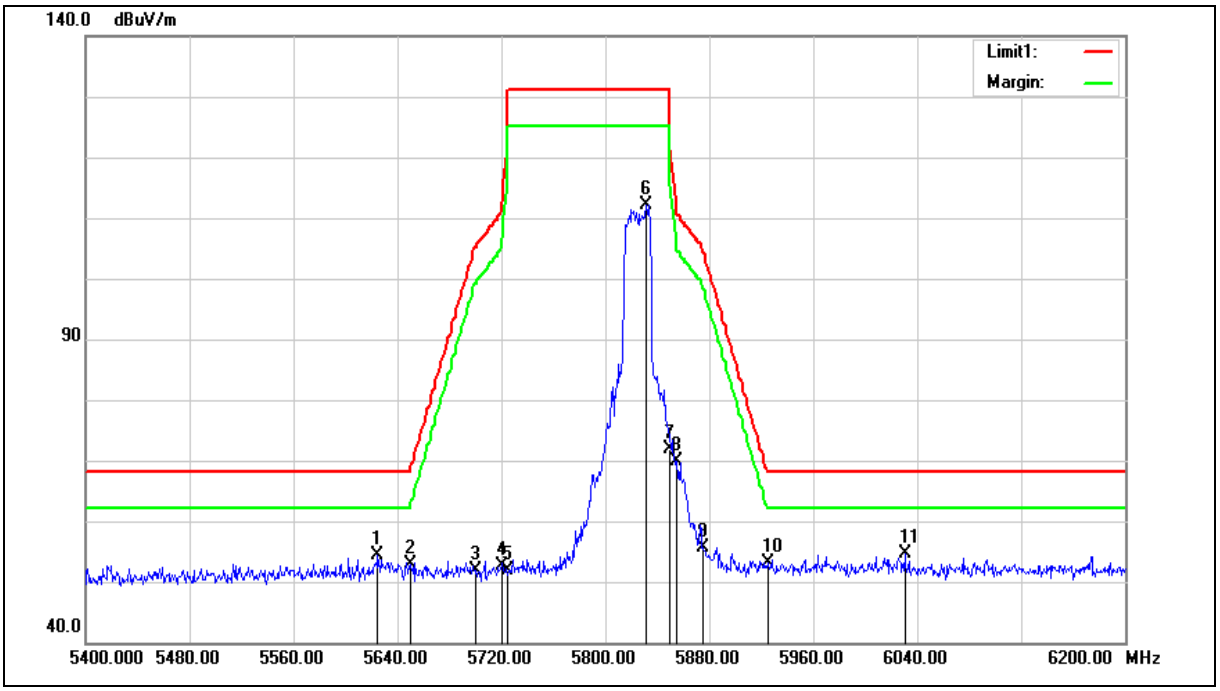

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5825 MHz		
Mode:	Mode 16		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5624.800	53.86	0.55	54.41	68.20	-13.79	peak
2	5650.000	52.20	0.62	52.82	68.20	-15.38	peak
3	5700.000	51.08	0.75	51.83	105.20	-53.37	peak
4	5720.000	51.92	0.81	52.73	110.80	-58.07	peak
5	5725.000	51.01	0.82	51.83	122.20	-70.37	peak
6	5831.200	110.95	1.11	112.06	--	--	peak
7	5850.000	70.83	1.17	72.00	122.20	-50.20	peak
8	5855.000	68.61	1.18	69.79	110.80	-41.01	peak
9	5875.000	54.40	1.23	55.63	105.20	-49.57	peak
10	5925.000	51.79	1.37	53.16	68.20	-15.04	peak
11	6030.400	53.04	1.67	54.71	68.20	-13.49	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5190 MHz		
Mode:	Mode 17		
Ant.Polar.:	Horizontal		

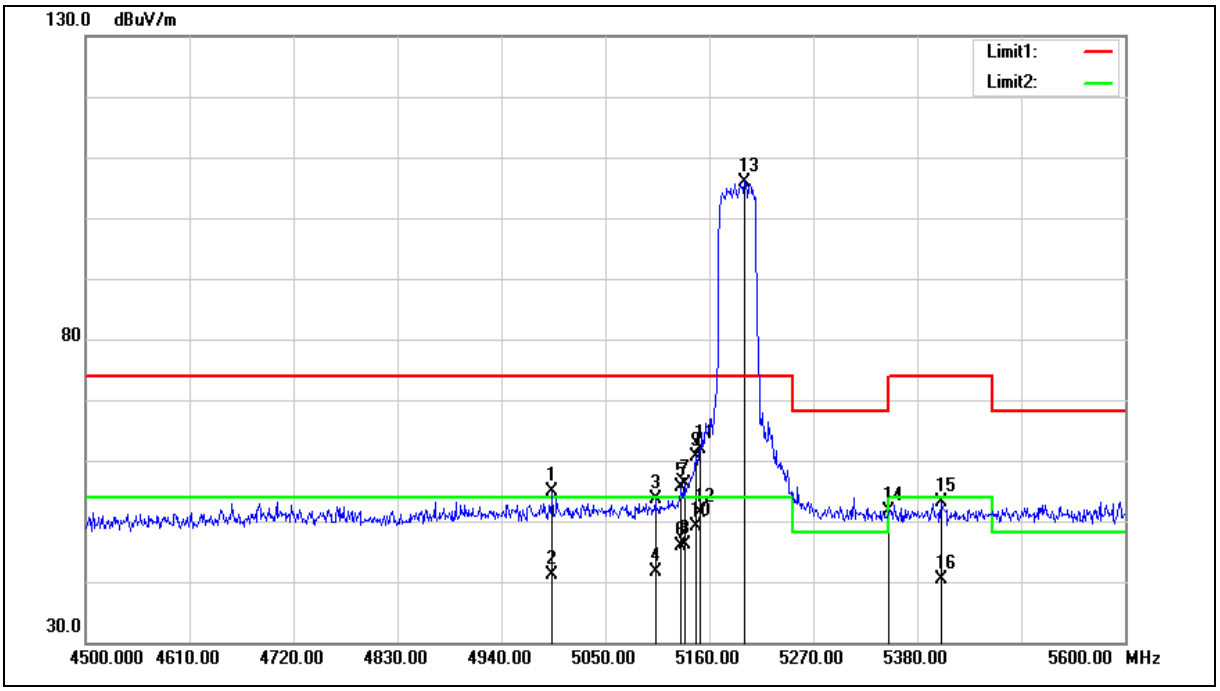

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5190 MHz		
Mode:	Mode 17		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4993.900	55.60	-0.78	54.82	74.00	-19.18	peak
2	4993.900	41.80	-0.78	41.02	54.00	-12.98	AVG
3	5102.800	54.11	-0.57	53.54	74.00	-20.46	peak
4	5102.800	42.29	-0.57	41.72	54.00	-12.28	AVG
5	5130.300	56.05	-0.52	55.53	74.00	-18.47	peak
6	5130.300	46.30	-0.52	45.78	54.00	-8.22	AVG
7	5133.600	56.63	-0.51	56.12	74.00	-17.88	peak
8	5133.600	46.68	-0.51	46.17	54.00	-7.83	AVG
9	5145.700	61.13	-0.48	60.65	74.00	-13.35	peak
10	5145.700	49.70	-0.48	49.22	54.00	-4.78	AVG
11	5150.000	62.34	-0.48	61.86	74.00	-12.14	peak
12	5150.000	51.84	-0.48	51.36	54.00	-2.64	AVG
13	5197.400	106.33	-0.38	105.95	--	--	peak
14	5350.000	51.71	-0.08	51.63	74.00	-22.37	peak
15	5405.300	53.05	0.02	53.07	74.00	-20.93	peak
16	5405.300	40.27	0.02	40.29	54.00	-13.71	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5190 MHz		
Mode:	Mode 17		
Ant.Polar.:	Vertical		

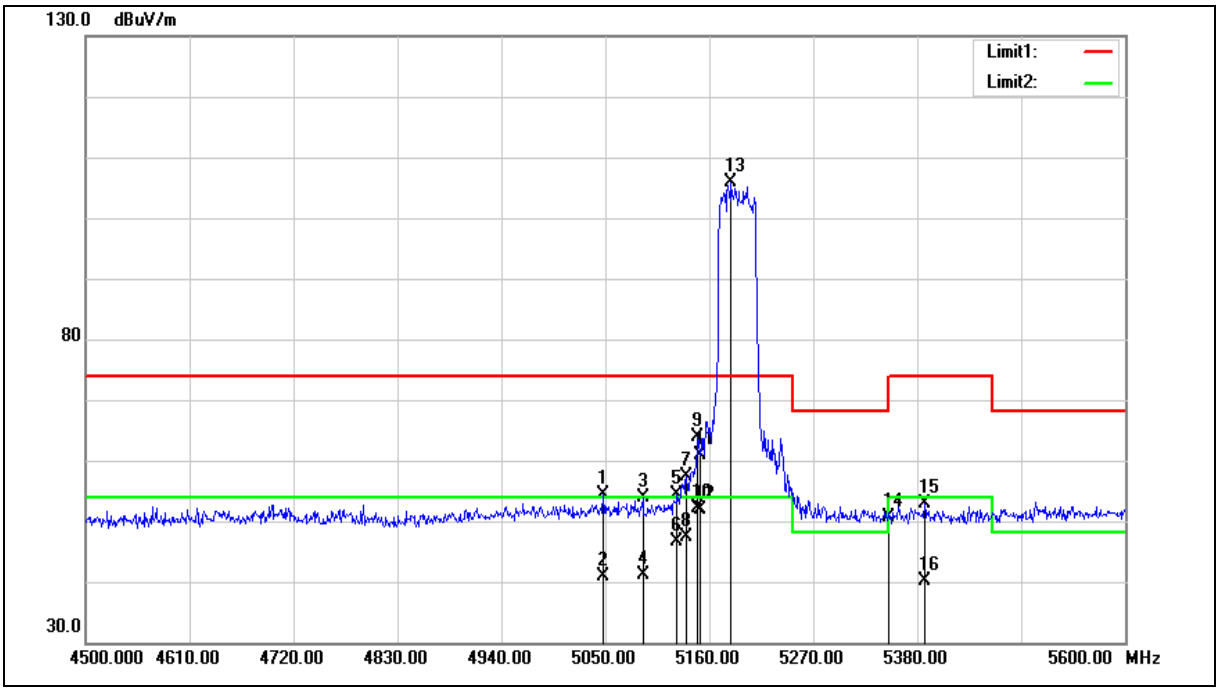

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5190 MHz		
Mode:	Mode 17		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5047.800	55.05	-0.68	54.37	74.00	-19.63	peak
2	5047.800	41.60	-0.68	40.92	54.00	-13.08	AVG
3	5089.600	54.39	-0.60	53.79	74.00	-20.21	peak
4	5089.600	41.80	-0.60	41.20	54.00	-12.80	AVG
5	5125.900	54.80	-0.52	54.28	74.00	-19.72	peak
6	5125.900	47.05	-0.52	46.53	54.00	-7.47	AVG
7	5135.800	57.80	-0.50	57.30	74.00	-16.70	peak
8	5135.800	47.94	-0.50	47.44	54.00	-6.56	AVG
9	5147.900	64.42	-0.48	63.94	74.00	-10.06	peak
10	5147.900	52.53	-0.48	52.05	54.00	-1.95	AVG
11	5150.000	61.47	-0.48	60.99	74.00	-13.01	peak
12	5150.000	52.37	-0.48	51.89	54.00	-2.11	AVG
13	5183.100	106.38	-0.40	105.98	--	--	peak
14	5350.000	50.77	-0.08	50.69	74.00	-23.31	peak
15	5387.700	52.84	0.00	52.84	74.00	-21.16	peak
16	5387.700	40.21	0.00	40.21	54.00	-13.79	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5230 MHz		
Mode:	Mode 17		
Ant.Polar.:	Horizontal		

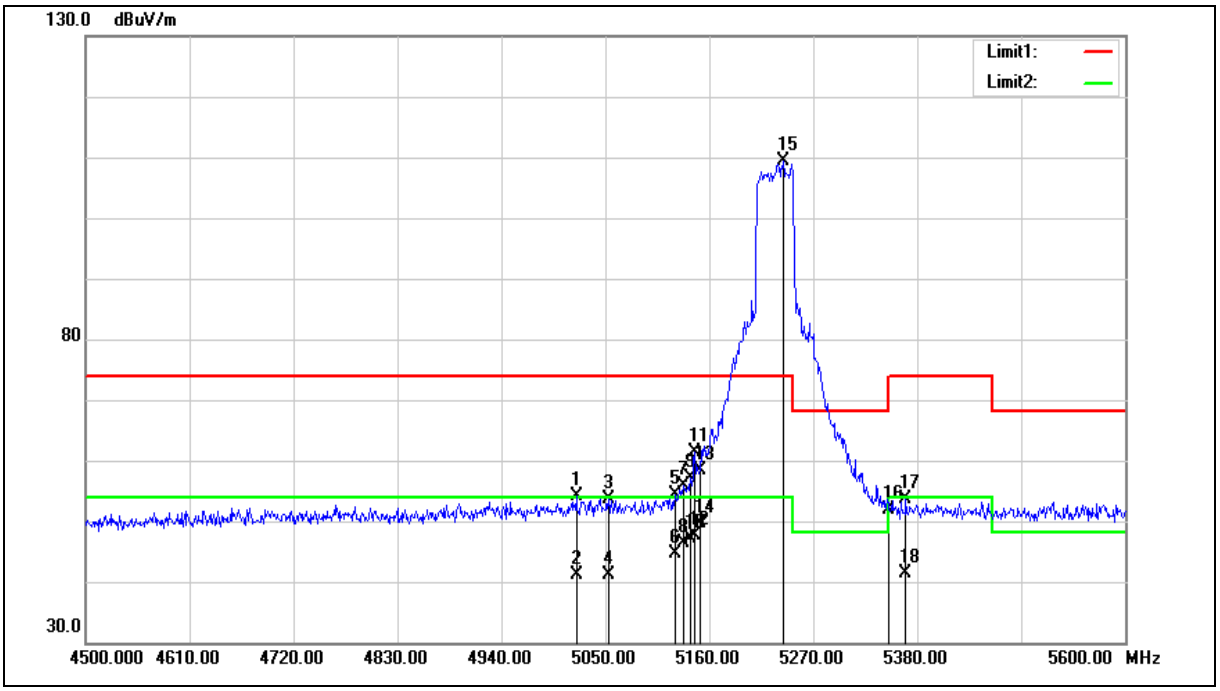

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5230 MHz		
Mode:	Mode 17		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5019.200	54.75	-0.73	54.02	74.00	-19.98	peak
2	5019.200	41.84	-0.73	41.11	54.00	-12.89	AVG
3	5053.300	54.36	-0.66	53.70	74.00	-20.30	peak
4	5053.300	41.90	-0.66	41.24	54.00	-12.76	AVG
5	5123.700	54.80	-0.52	54.28	74.00	-19.72	peak
6	5123.700	45.19	-0.52	44.67	54.00	-9.33	AVG
7	5132.500	56.34	-0.51	55.83	74.00	-18.17	peak
8	5132.500	46.86	-0.51	46.35	54.00	-7.65	AVG
9	5140.200	57.65	-0.49	57.16	74.00	-16.84	peak
10	5140.200	47.59	-0.49	47.10	54.00	-6.90	AVG
11	5144.600	61.98	-0.48	61.50	74.00	-12.50	peak
12	5144.600	48.07	-0.48	47.59	54.00	-6.41	AVG
13	5150.000	58.84	-0.48	58.36	74.00	-15.64	peak
14	5150.000	50.20	-0.48	49.72	54.00	-4.28	AVG
15	5238.100	109.65	-0.31	109.34	--	--	peak
16	5350.000	51.98	-0.08	51.90	74.00	-22.10	peak
17	5367.900	53.63	-0.05	53.58	74.00	-20.42	peak
18	5367.900	41.42	-0.05	41.37	54.00	-12.63	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5230 MHz		
Mode:	Mode 17		
Ant.Polar.:	Vertical		

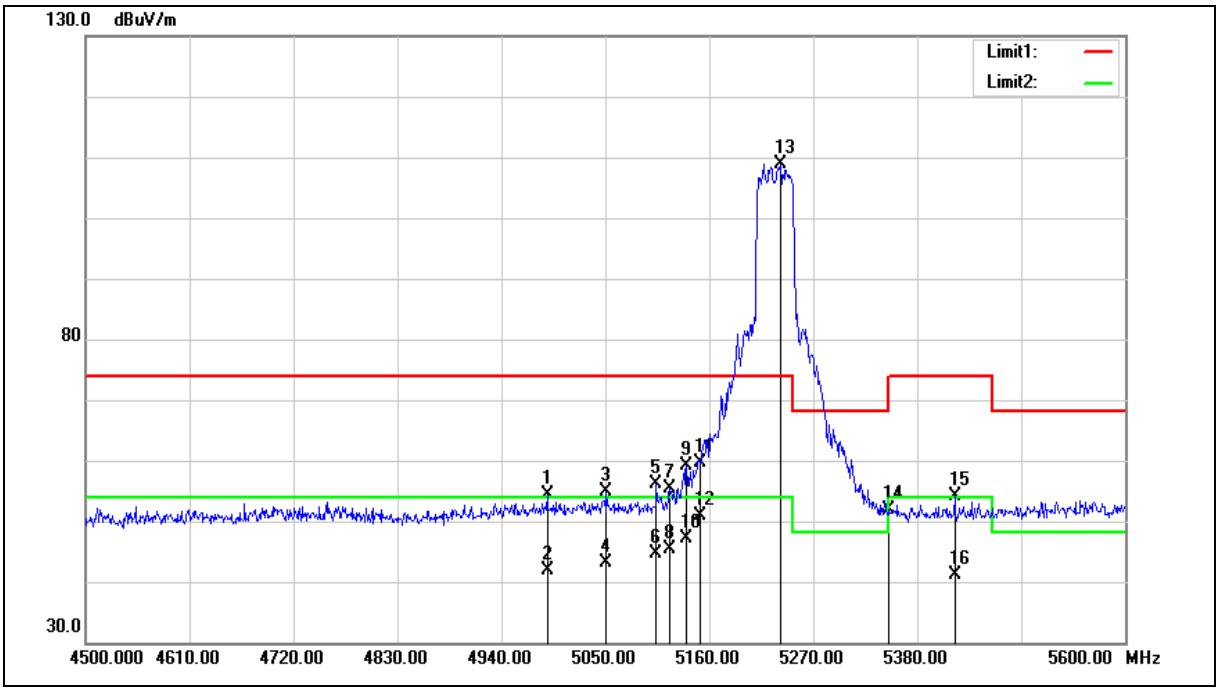

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5230 MHz		
Mode:	Mode 17		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4988.400	55.07	-0.81	54.26	74.00	-19.74	peak
2	4988.400	42.73	-0.81	41.92	54.00	-12.08	AVG
3	5051.100	55.56	-0.67	54.89	74.00	-19.11	peak
4	5051.100	43.78	-0.67	43.11	54.00	-10.89	AVG
5	5103.900	56.60	-0.57	56.03	74.00	-17.97	peak
6	5103.900	45.09	-0.57	44.52	54.00	-9.48	AVG
7	5118.200	55.87	-0.54	55.33	74.00	-18.67	peak
8	5118.200	45.88	-0.54	45.34	54.00	-8.66	AVG
9	5135.800	59.72	-0.50	59.22	74.00	-14.78	peak
10	5135.800	47.67	-0.50	47.17	54.00	-6.83	AVG
11	5150.000	60.10	-0.48	59.62	74.00	-14.38	peak
12	5150.000	51.46	-0.48	50.98	54.00	-3.02	AVG
13	5235.900	109.19	-0.31	108.88	--	--	peak
14	5350.000	51.96	-0.08	51.88	74.00	-22.12	peak
15	5419.600	54.06	0.06	54.12	74.00	-19.88	peak
16	5419.600	41.15	0.06	41.21	54.00	-12.79	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5270 MHz		
Mode:	Mode 17		
Ant.Polar.:	Horizontal		

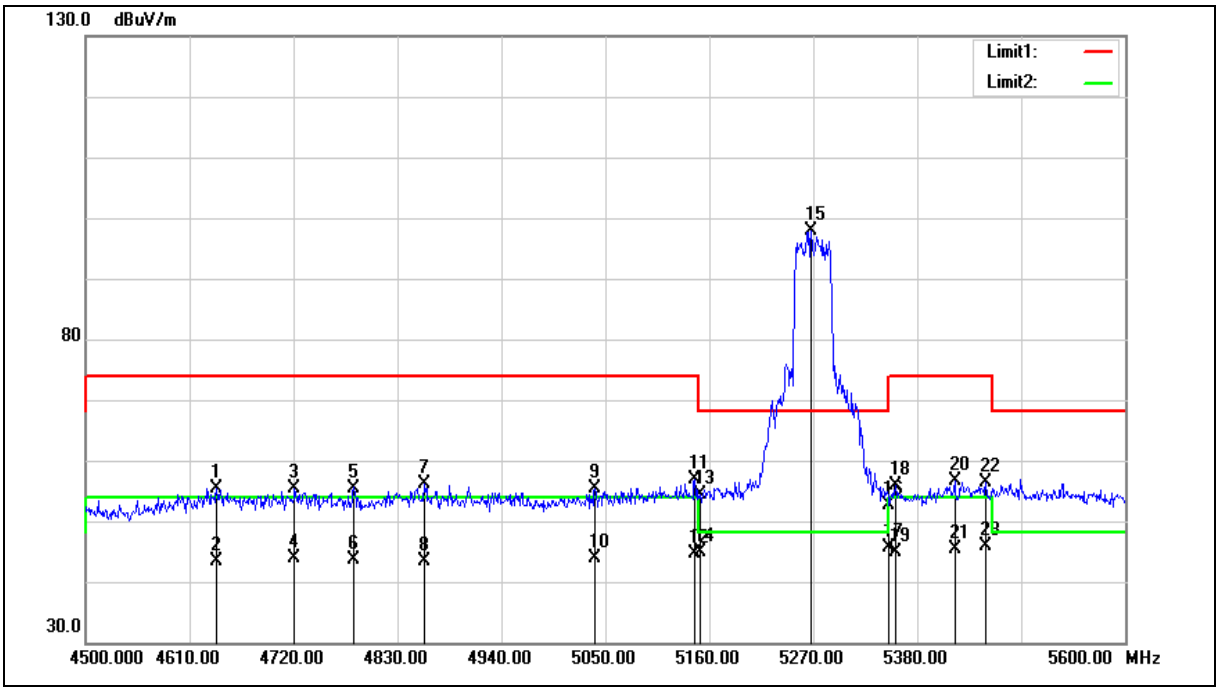

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5270 MHz		
Mode:	Mode 17		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4638.600	51.67	3.83	55.50	74.00	-18.50	peak
2	4638.600	39.63	3.83	43.46	54.00	-10.54	AVG
3	4721.100	51.38	4.03	55.41	74.00	-18.59	peak
4	4721.100	39.79	4.03	43.82	54.00	-10.18	AVG
5	4783.800	51.30	4.20	55.50	74.00	-18.50	peak
6	4783.800	39.45	4.20	43.65	54.00	-10.35	AVG
7	4858.600	51.62	4.39	56.01	74.00	-17.99	peak
8	4858.600	39.00	4.39	43.39	54.00	-10.61	AVG
9	5039.000	50.48	4.84	55.32	74.00	-18.68	peak
10	5039.000	38.93	4.84	43.77	54.00	-10.23	AVG
11	5144.600	51.79	5.11	56.90	74.00	-17.10	peak
12	5144.600	39.45	5.11	44.56	54.00	-9.44	AVG
13	5150.000	49.34	5.12	54.46	74.00	-19.54	peak
14	5150.000	39.73	5.12	44.85	54.00	-9.15	AVG
15	5267.800	92.43	5.40	97.83	--	--	peak
16	5350.000	46.94	5.61	52.55	74.00	-21.45	peak
17	5350.000	39.90	5.61	45.51	54.00	-8.49	AVG
18	5356.900	50.33	5.63	55.96	74.00	-18.04	peak
19	5356.900	39.30	5.63	44.93	54.00	-9.07	AVG
20	5419.600	50.72	5.79	56.51	74.00	-17.49	peak
21	5419.600	39.59	5.79	45.38	54.00	-8.62	AVG
22	5452.600	50.64	5.85	56.49	74.00	-17.51	peak
23	5452.600	39.99	5.85	45.84	54.00	-8.16	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5270 MHz		
Mode:	Mode 17		
Ant.Polar.:	Vertical		

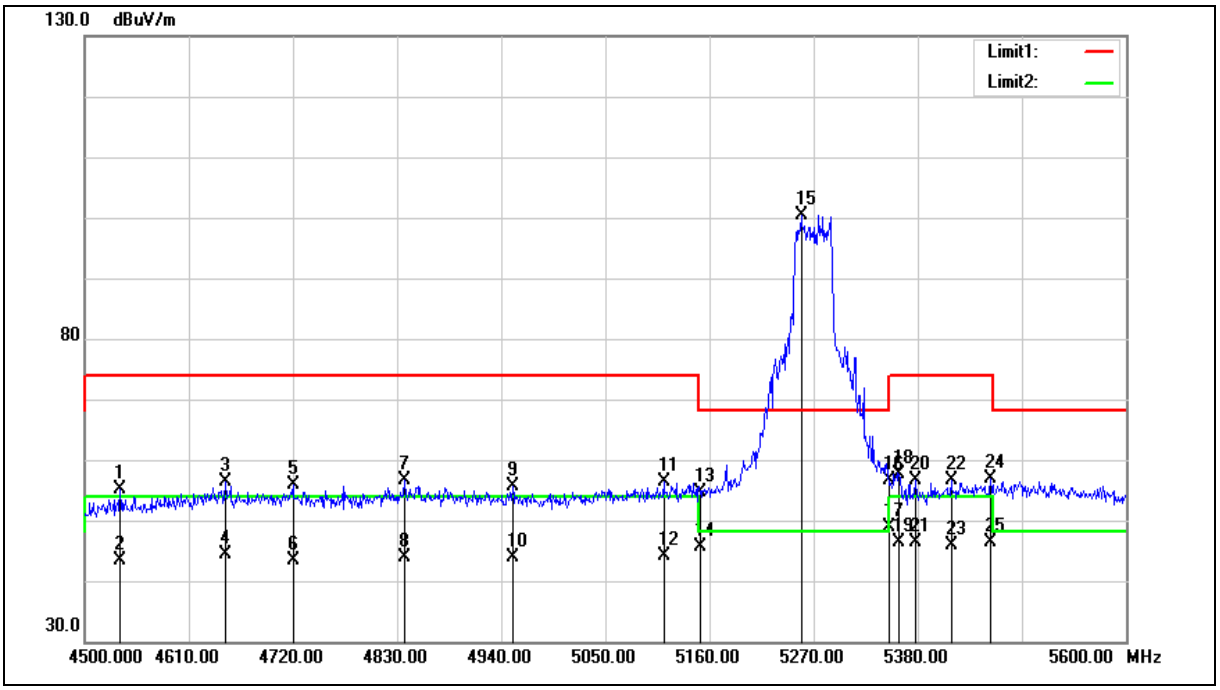

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5270 MHz		
Mode:	Mode 17		
Ant.Polar.:	Vertical		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4537.400	51.55	3.58	55.13	74.00	-18.87	peak
2	4537.400	39.87	3.58	43.45	54.00	-10.55	AVG
3	4648.500	52.59	3.86	56.45	74.00	-17.55	peak
4	4648.500	40.54	3.86	44.40	54.00	-9.60	AVG
5	4720.000	51.89	4.03	55.92	74.00	-18.08	peak
6	4720.000	39.43	4.03	43.46	54.00	-10.54	AVG
7	4837.700	52.38	4.34	56.72	74.00	-17.28	peak
8	4837.700	39.42	4.34	43.76	54.00	-10.24	AVG
9	4952.100	51.06	4.63	55.69	74.00	-18.31	peak
10	4952.100	39.33	4.63	43.96	54.00	-10.04	AVG
11	5111.600	51.38	5.02	56.40	74.00	-17.60	peak
12	5111.600	39.09	5.02	44.11	54.00	-9.89	AVG
13	5150.000	49.60	5.12	54.72	74.00	-19.28	peak
14	5150.000	40.45	5.12	45.57	54.00	-8.43	AVG
15	5256.800	95.02	5.38	100.40	--	--	peak
16	5350.000	51.11	5.61	56.72	74.00	-17.28	peak
17	5350.000	43.22	5.61	48.83	54.00	-5.17	AVG
18	5360.200	51.93	5.64	57.57	74.00	-16.43	peak
19	5360.200	40.74	5.64	46.38	54.00	-7.62	AVG
20	5377.800	50.92	5.67	56.59	74.00	-17.41	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5270 MHz		
Mode:	Mode 17		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
20	5377.800	50.92	5.67	56.59	74.00	-17.41	peak
21	5377.800	40.75	5.67	46.42	54.00	-7.58	AVG
22	5415.200	50.95	5.77	56.72	74.00	-17.28	peak
23	5415.200	40.18	5.77	45.95	54.00	-8.05	AVG
24	5457.000	51.05	5.87	56.92	74.00	-17.08	peak
25	5457.000	40.54	5.87	46.41	54.00	-7.59	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5310 MHz		
Mode:	Mode 17		
Ant.Polar.:	Horizontal		

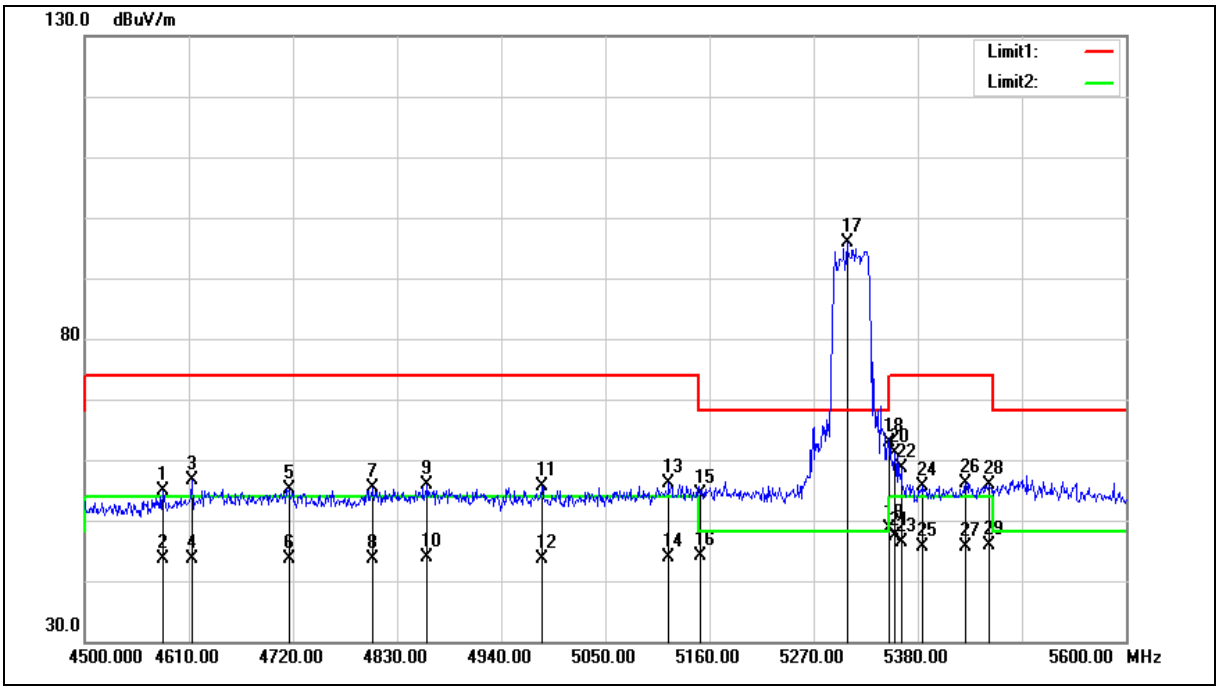

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5310 MHz		
Mode:	Mode 17		
Ant.Polar.:	Horizontal		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4582.500	51.11	3.69	54.80	74.00	-19.20	peak
2	4582.500	39.85	3.69	43.54	54.00	-10.46	AVG
3	4613.300	52.76	3.77	56.53	74.00	-17.47	peak
4	4613.300	39.90	3.77	43.67	54.00	-10.33	AVG
5	4715.600	51.06	4.02	55.08	74.00	-18.92	peak
6	4715.600	39.57	4.02	43.59	54.00	-10.41	AVG
7	4804.700	51.21	4.25	55.46	74.00	-18.54	peak
8	4804.700	39.46	4.25	43.71	54.00	-10.29	AVG
9	4861.900	51.50	4.40	55.90	74.00	-18.10	peak
10	4861.900	39.40	4.40	43.80	54.00	-10.20	AVG
11	4982.900	51.02	4.71	55.73	74.00	-18.27	peak
12	4982.900	38.98	4.71	43.69	54.00	-10.31	AVG
13	5117.100	51.00	5.03	56.03	74.00	-17.97	peak
14	5117.100	38.85	5.03	43.88	54.00	-10.12	AVG
15	5150.000	49.23	5.12	54.35	74.00	-19.65	peak
16	5150.000	39.04	5.12	44.16	54.00	-9.84	AVG
17	5305.200	90.34	5.49	95.83	--	--	peak
18	5350.000	57.23	5.61	62.84	74.00	-11.16	peak
19	5350.000	42.95	5.61	48.56	54.00	-5.44	AVG
20	5355.800	55.55	5.62	61.17	74.00	-12.83	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5310 MHz		
Mode:	Mode 17		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
21	5355.800	41.86	5.62	47.48	54.00	-6.52	AVG
22	5362.400	52.92	5.64	58.56	74.00	-15.44	peak
23	5362.400	40.65	5.64	46.29	54.00	-7.71	AVG
24	5385.500	49.95	5.69	55.64	74.00	-18.36	peak
25	5385.500	39.91	5.69	45.60	54.00	-8.40	AVG
26	5430.600	50.29	5.81	56.10	74.00	-17.90	peak
27	5430.600	39.77	5.81	45.58	54.00	-8.42	AVG
28	5454.800	49.90	5.86	55.76	74.00	-18.24	peak
29	5454.800	40.08	5.86	45.94	54.00	-8.06	

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5310 MHz		
Mode:	Mode 17		
Ant.Polar.:	Vertical		

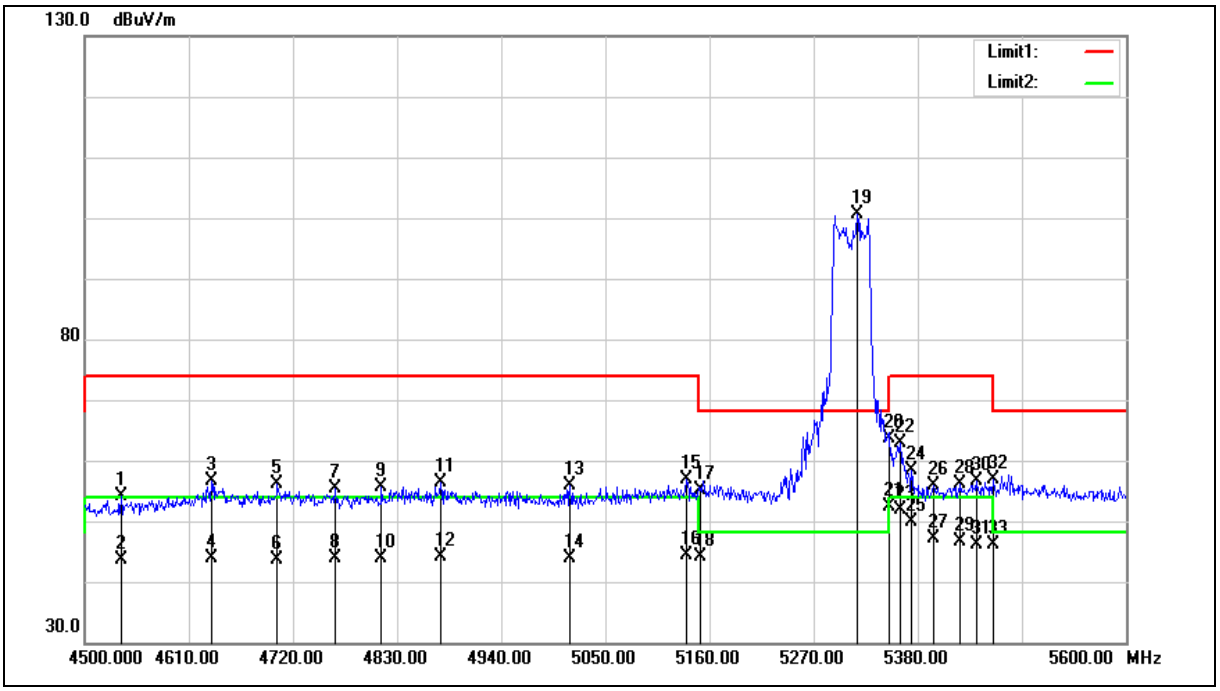

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5310 MHz		
Mode:	Mode 17		
Ant.Polar.:	Vertical		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4538.500	50.57	3.58	54.15	74.00	-19.85	peak
2	4538.500	40.04	3.58	43.62	54.00	-10.38	AVG
3	4634.200	52.85	3.81	56.66	74.00	-17.34	peak
4	4634.200	39.98	3.81	43.79	54.00	-10.21	AVG
5	4703.500	52.13	4.00	56.13	74.00	-17.87	peak
6	4703.500	39.64	4.00	43.64	54.00	-10.36	AVG
7	4764.000	51.22	4.14	55.36	74.00	-18.64	peak
8	4764.000	39.67	4.14	43.81	54.00	-10.19	AVG
9	4813.500	51.24	4.28	55.52	74.00	-18.48	peak
10	4813.500	39.71	4.28	43.99	54.00	-10.01	AVG
11	4876.200	51.94	4.43	56.37	74.00	-17.63	peak
12	4876.200	39.62	4.43	44.05	54.00	-9.95	AVG
13	5012.600	51.15	4.78	55.93	74.00	-18.07	peak
14	5012.600	39.08	4.78	43.86	54.00	-10.14	AVG
15	5135.800	51.72	5.08	56.80	74.00	-17.20	peak
16	5135.800	39.19	5.08	44.27	54.00	-9.73	AVG
17	5150.000	49.94	5.12	55.06	74.00	-18.94	peak
18	5150.000	39.04	5.12	44.16	54.00	-9.84	AVG
19	5316.200	95.20	5.52	100.72	--	--	peak
20	5350.000	57.90	5.61	63.51	74.00	-10.49	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5310 MHz		
Mode:	Mode 17		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
21	5350.000	46.77	5.61	52.38	54.00	-1.62	AVG
22	5361.300	57.18	5.64	62.82	74.00	-11.18	peak
23	5361.300	46.32	5.64	51.96	54.00	-2.04	AVG
24	5373.400	52.83	5.66	58.49	74.00	-15.51	peak
25	5373.400	44.19	5.66	49.85	54.00	-4.15	AVG
26	5396.500	50.05	5.72	55.77	74.00	-18.23	peak
27	5396.500	41.50	5.72	47.22	54.00	-6.78	AVG
28	5425.100	50.24	5.80	56.04	74.00	-17.96	peak
29	5425.100	40.80	5.80	46.60	54.00	-7.40	AVG
30	5441.600	50.90	5.82	56.72	74.00	-17.28	peak
31	5441.600	40.37	5.82	46.19	54.00	-7.81	AVG
32	5459.200	51.07	5.88	56.95	74.00	-17.05	peak
33	5459.200	40.17	5.88	46.05	54.00	-7.95	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5510 MHz		
Mode:	Mode 17		
Ant.Polar.:	Horizontal		

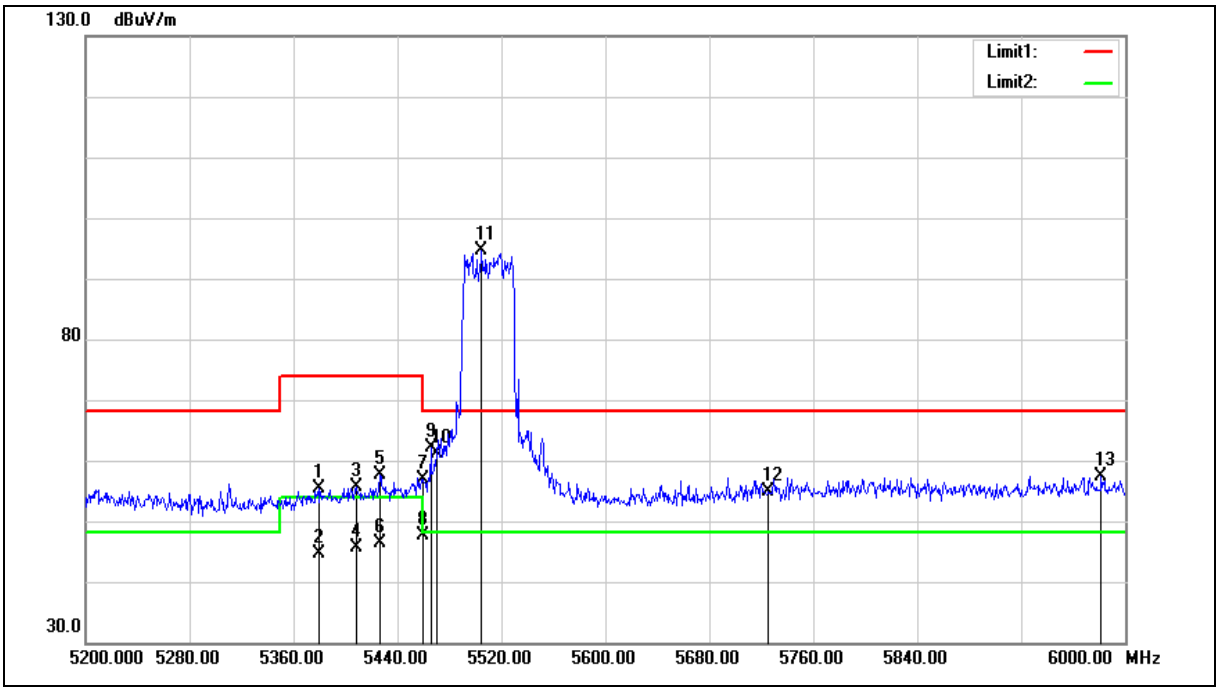

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5510 MHz		
Mode:	Mode 17		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5379.200	49.62	5.67	55.29	74.00	-18.71	peak
2	5379.200	38.86	5.67	44.53	54.00	-9.47	AVG
3	5408.000	49.76	5.75	55.51	74.00	-18.49	peak
4	5408.000	39.79	5.75	45.54	54.00	-8.46	AVG
5	5426.400	51.88	5.80	57.68	74.00	-16.32	peak
6	5426.400	40.60	5.80	46.40	54.00	-7.60	AVG
7	5460.000	51.00	5.88	56.88	74.00	-17.12	peak
8	5460.000	41.84	5.88	47.72	54.00	-6.28	AVG
9	5465.600	56.12	5.89	62.01	68.20	-6.19	peak
10	5470.000	55.26	5.91	61.17	68.20	-7.03	peak
11	5504.800	88.57	5.98	94.55	--	--	peak
12	5725.000	48.36	6.47	54.83	68.20	-13.37	peak
13	5981.600	50.38	7.04	57.42	68.20	-10.78	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5510 MHz		
Mode:	Mode 17		
Ant.Polar.:	Vertical		

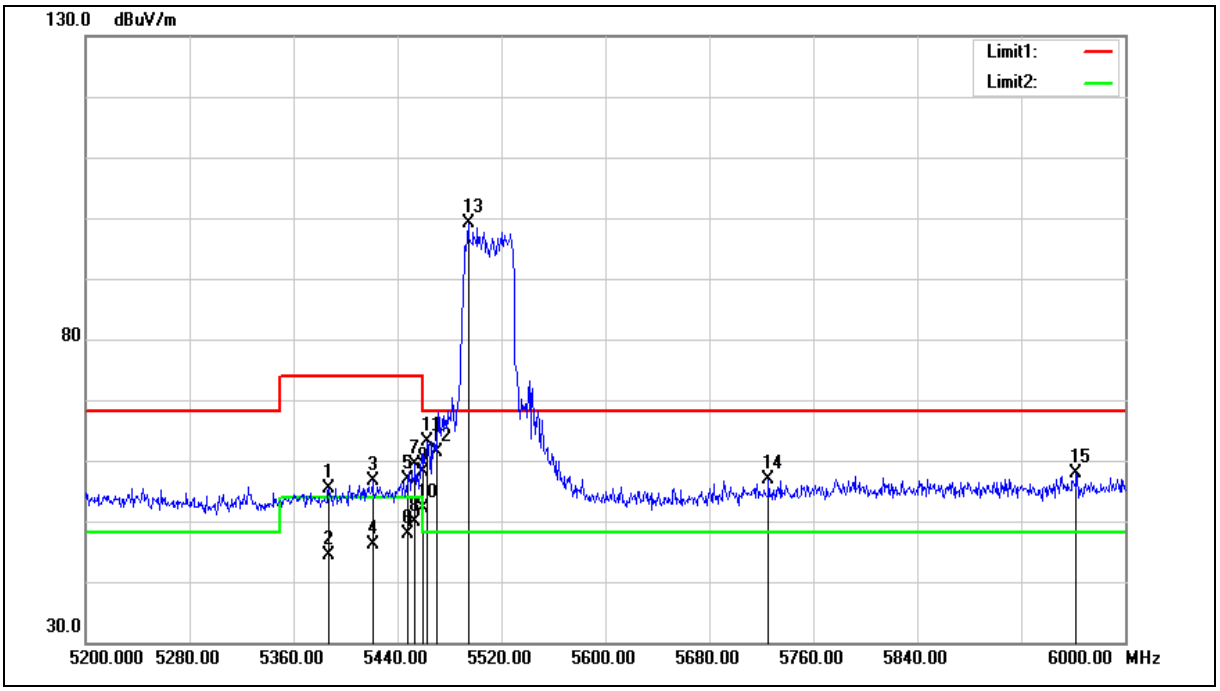

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5510 MHz		
Mode:	Mode 17		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5387.200	49.58	5.70	55.28	74.00	-18.72	peak
2	5387.200	38.63	5.70	44.33	54.00	-9.67	AVG
3	5420.800	50.93	5.79	56.72	74.00	-17.28	peak
4	5420.800	40.45	5.79	46.24	54.00	-7.76	AVG
5	5448.000	51.00	5.85	56.85	74.00	-17.15	peak
6	5448.000	42.11	5.85	47.96	54.00	-6.04	AVG
7	5453.600	53.59	5.86	59.45	74.00	-14.55	peak
8	5453.600	44.12	5.86	49.98	54.00	-4.02	AVG
9	5460.000	52.15	5.88	58.03	74.00	-15.97	peak
10	5460.000	46.18	5.88	52.06	54.00	-1.94	AVG
11	5462.400	57.31	5.88	63.19	68.20	-5.01	peak
12	5470.000	55.35	5.91	61.26	68.20	-6.94	peak
13	5494.400	93.13	5.97	99.10	--	--	peak
14	5725.000	50.33	6.47	56.80	68.20	-11.40	peak
15	5962.400	50.77	7.01	57.78	68.20	-10.42	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5550 MHz		
Mode:	Mode 17		
Ant.Polar.:	Horizontal		

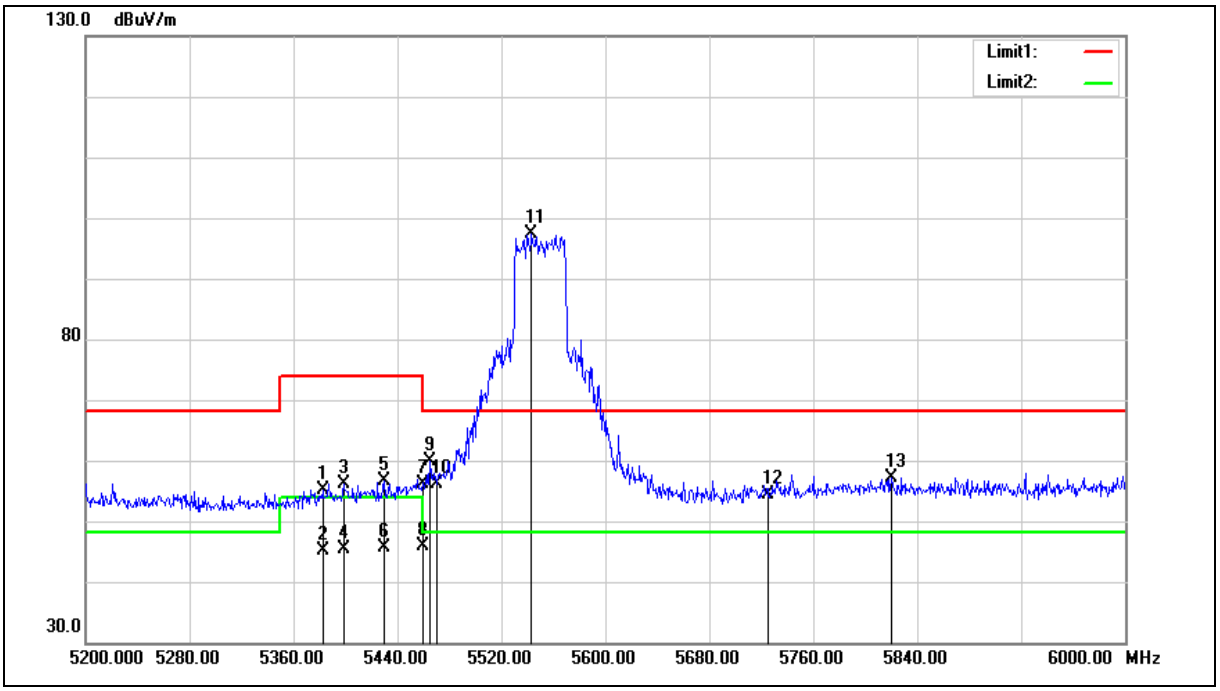

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5550 MHz		
Mode:	Mode 17		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5382.400	49.52	5.69	55.21	74.00	-18.79	peak
2	5382.400	39.39	5.69	45.08	54.00	-8.92	AVG
3	5398.400	50.40	5.73	56.13	74.00	-17.87	peak
4	5398.400	39.62	5.73	45.35	54.00	-8.65	AVG
5	5429.600	50.93	5.80	56.73	74.00	-17.27	peak
6	5429.600	39.74	5.80	45.54	54.00	-8.46	AVG
7	5460.000	50.18	5.88	56.06	74.00	-17.94	peak
8	5460.000	39.88	5.88	45.76	54.00	-8.24	AVG
9	5464.800	54.06	5.89	59.95	68.20	-8.25	peak
10	5470.000	50.21	5.91	56.12	68.20	-12.08	peak
11	5543.200	91.20	6.07	97.27	--	--	peak
12	5725.000	47.93	6.47	54.40	68.20	-13.80	peak
13	5820.000	50.44	6.69	57.13	68.20	-11.07	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5550 MHz		
Mode:	Mode 17		
Ant.Polar.:	Vertical		

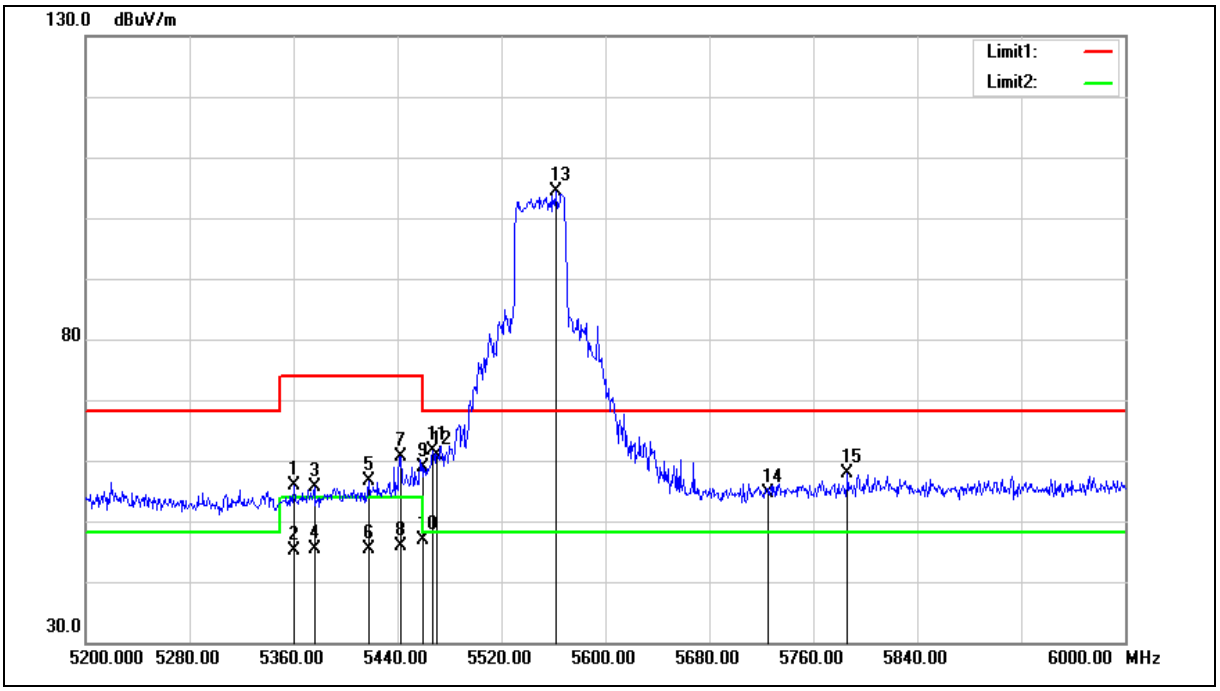

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5550 MHz		
Mode:	Mode 17		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5360.000	50.21	5.64	55.85	74.00	-18.15	peak
2	5360.000	39.38	5.64	45.02	54.00	-8.98	AVG
3	5376.000	49.89	5.67	55.56	74.00	-18.44	peak
4	5376.000	39.76	5.67	45.43	54.00	-8.57	AVG
5	5417.600	50.76	5.77	56.53	74.00	-17.47	peak
6	5417.600	39.65	5.77	45.42	54.00	-8.58	AVG
7	5442.400	54.82	5.83	60.65	74.00	-13.35	peak
8	5442.400	40.03	5.83	45.86	54.00	-8.14	AVG
9	5460.000	53.04	5.88	58.92	74.00	-15.08	peak
10	5460.000	41.06	5.88	46.94	54.00	-7.06	AVG
11	5467.200	55.84	5.89	61.73	68.20	-6.47	peak
12	5470.000	55.05	5.91	60.96	68.20	-7.24	peak
13	5561.600	98.19	6.12	104.31	--	--	peak
14	5725.000	48.24	6.47	54.71	68.20	-13.49	peak
15	5786.400	51.30	6.61	57.91	68.20	-10.29	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5670 MHz		
Mode:	Mode 17		
Ant.Polar.:	Horizontal		

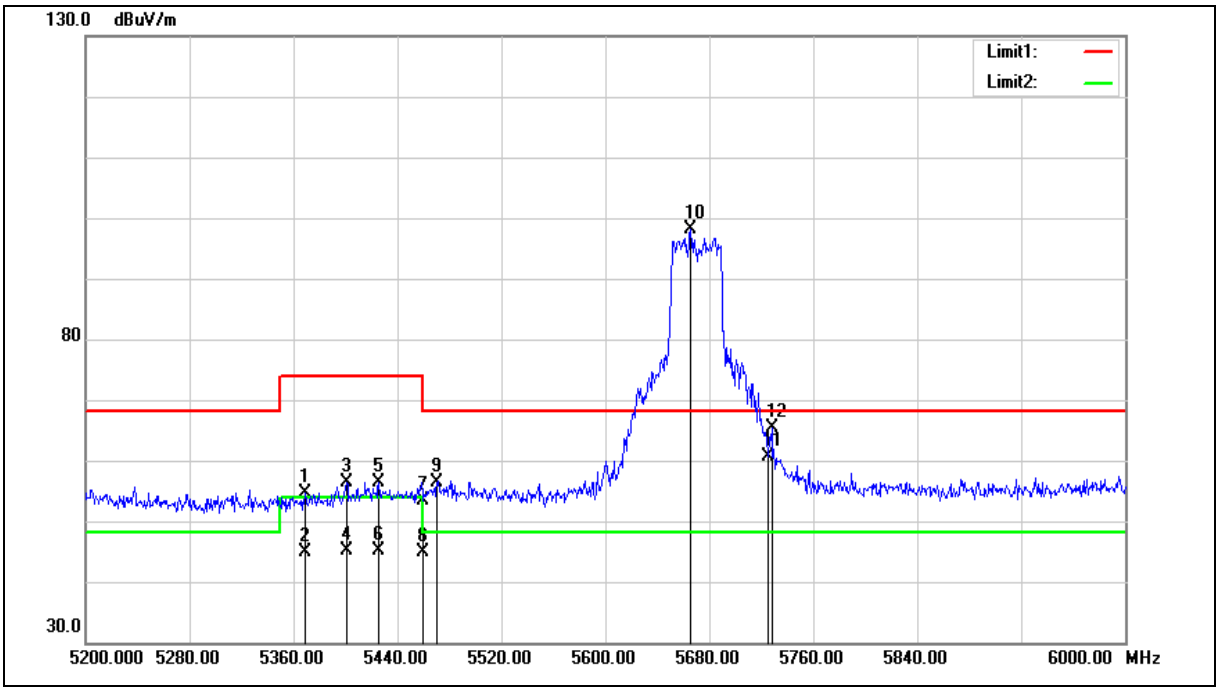

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5670 MHz		
Mode:	Mode 17		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5368.800	48.96	5.65	54.61	74.00	-19.39	peak
2	5368.800	39.21	5.65	44.86	54.00	-9.14	AVG
3	5400.800	50.58	5.73	56.31	74.00	-17.69	peak
4	5400.800	39.36	5.73	45.09	54.00	-8.91	AVG
5	5425.600	50.53	5.80	56.33	74.00	-17.67	peak
6	5425.600	39.43	5.80	45.23	54.00	-8.77	AVG
7	5460.000	47.42	5.88	53.30	74.00	-20.70	peak
8	5460.000	39.09	5.88	44.97	54.00	-9.03	AVG
9	5470.000	50.50	5.91	56.41	68.20	-11.79	peak
10	5665.600	91.77	6.34	98.11	--	--	peak
11	5725.000	54.17	6.47	60.64	68.20	-7.56	peak
12	5728.000	58.84	6.48	65.32	68.20	-2.88	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5670 MHz		
Mode:	Mode 17		
Ant.Polar.:	Vertical		

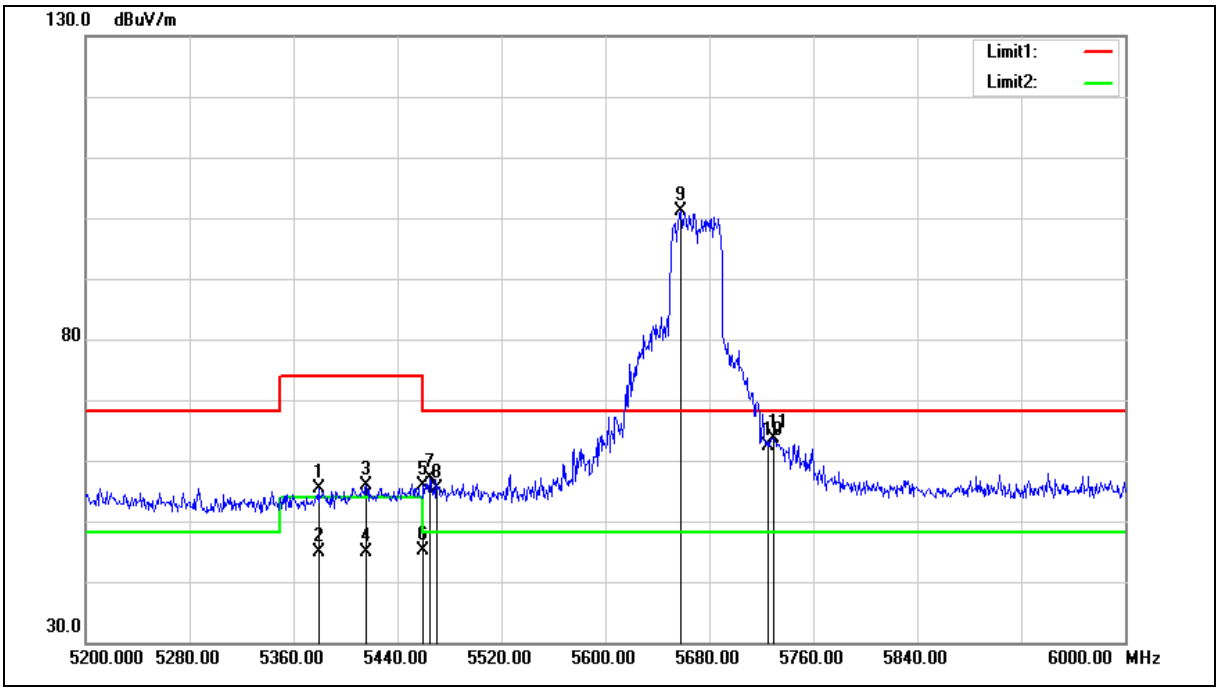

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5670 MHz		
Mode:	Mode 17		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5379.200	49.68	5.67	55.35	74.00	-18.65	peak
2	5379.200	39.26	5.67	44.93	54.00	-9.07	AVG
3	5416.000	50.11	5.77	55.88	74.00	-18.12	peak
4	5416.000	39.09	5.77	44.86	54.00	-9.14	AVG
5	5460.000	50.01	5.88	55.89	74.00	-18.11	peak
6	5460.000	39.29	5.88	45.17	54.00	-8.83	AVG
7	5464.800	51.17	5.89	57.06	68.20	-11.14	peak
8	5470.000	49.46	5.91	55.37	68.20	-12.83	peak
9	5657.600	94.89	6.32	101.21	--	--	peak
10	5725.000	55.98	6.47	62.45	68.20	-5.75	peak
11	5729.600	57.09	6.49	63.58	68.20	-4.62	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5755 MHz		
Mode:	Mode 17		
Ant.Polar.:	Horizontal		

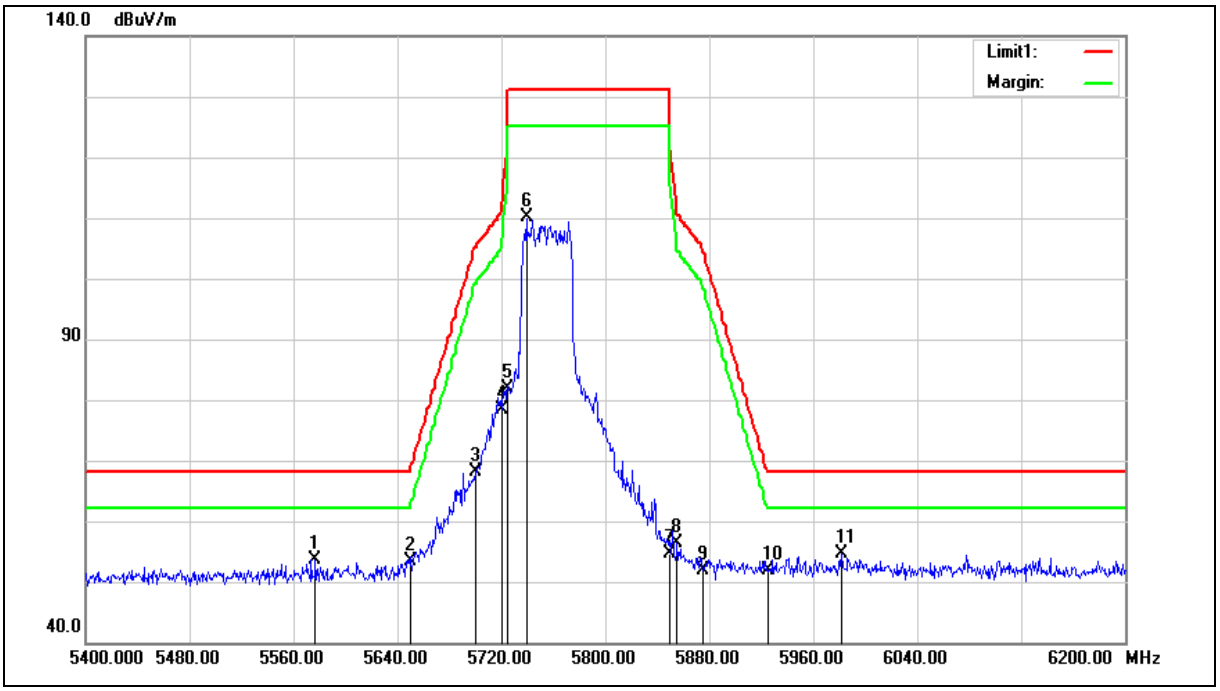

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5755 MHz		
Mode:	Mode 17		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5576.800	53.21	0.42	53.63	68.20	-14.57	peak
2	5650.000	52.82	0.62	53.44	68.20	-14.76	peak
3	5700.000	67.48	0.75	68.23	105.20	-36.97	peak
4	5720.000	77.50	0.81	78.31	110.80	-32.49	peak
5	5725.000	81.13	0.82	81.95	122.20	-40.25	peak
6	5739.200	109.39	0.86	110.25	--	--	peak
7	5850.000	53.40	1.17	54.57	122.20	-67.63	peak
8	5855.000	55.12	1.18	56.30	110.80	-54.50	peak
9	5875.000	50.73	1.23	51.96	105.20	-53.24	peak
10	5925.000	50.41	1.37	51.78	68.20	-16.42	peak
11	5981.600	53.04	1.52	54.56	68.20	-13.64	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5755 MHz		
Mode:	Mode 17		
Ant.Polar.:	Vertical		

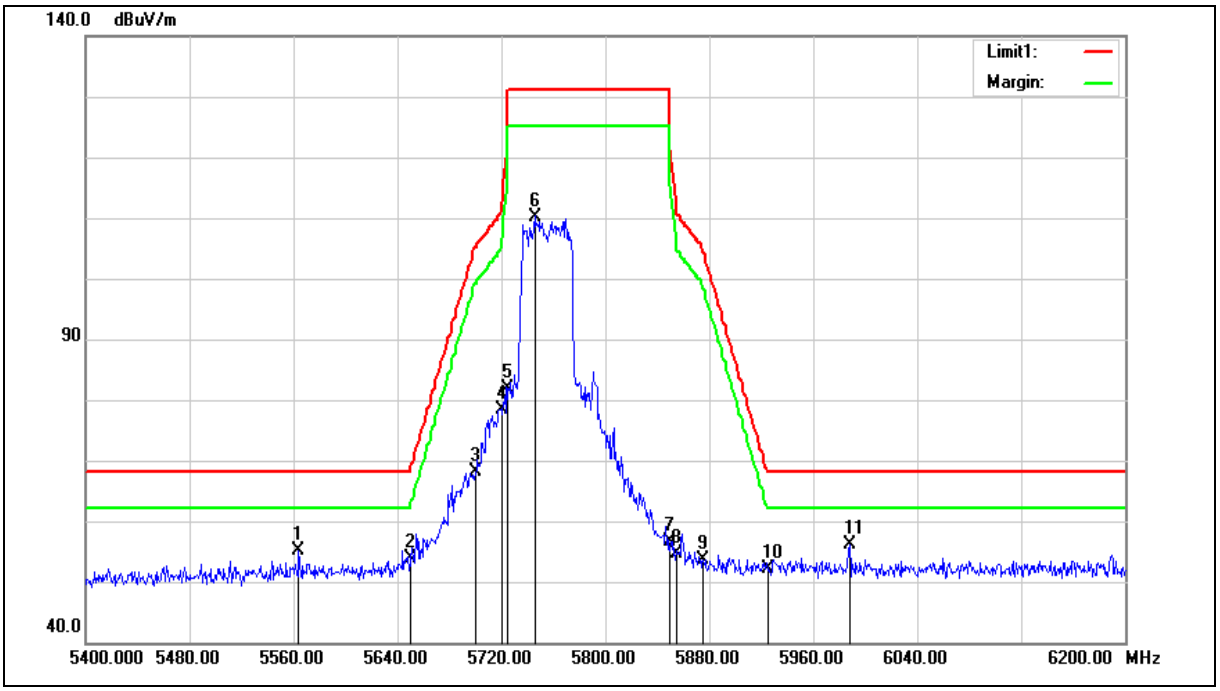

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5755 MHz		
Mode:	Mode 17		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5564.000	54.79	0.39	55.18	68.20	-13.02	peak
2	5650.000	53.14	0.62	53.76	68.20	-14.44	peak
3	5700.000	67.38	0.75	68.13	105.20	-37.07	peak
4	5720.000	77.48	0.81	78.29	110.80	-32.51	peak
5	5725.000	80.98	0.82	81.80	122.20	-40.40	peak
6	5745.600	109.16	0.87	110.03	--	--	peak
7	5850.000	55.50	1.17	56.67	122.20	-65.53	peak
8	5855.000	53.40	1.18	54.58	110.80	-56.22	peak
9	5875.000	52.46	1.23	53.69	105.20	-51.51	peak
10	5925.000	50.84	1.37	52.21	68.20	-15.99	peak
11	5988.000	54.71	1.53	56.24	68.20	-11.96	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5795 MHz		
Mode:	Mode 17		
Ant.Polar.:	Horizontal		

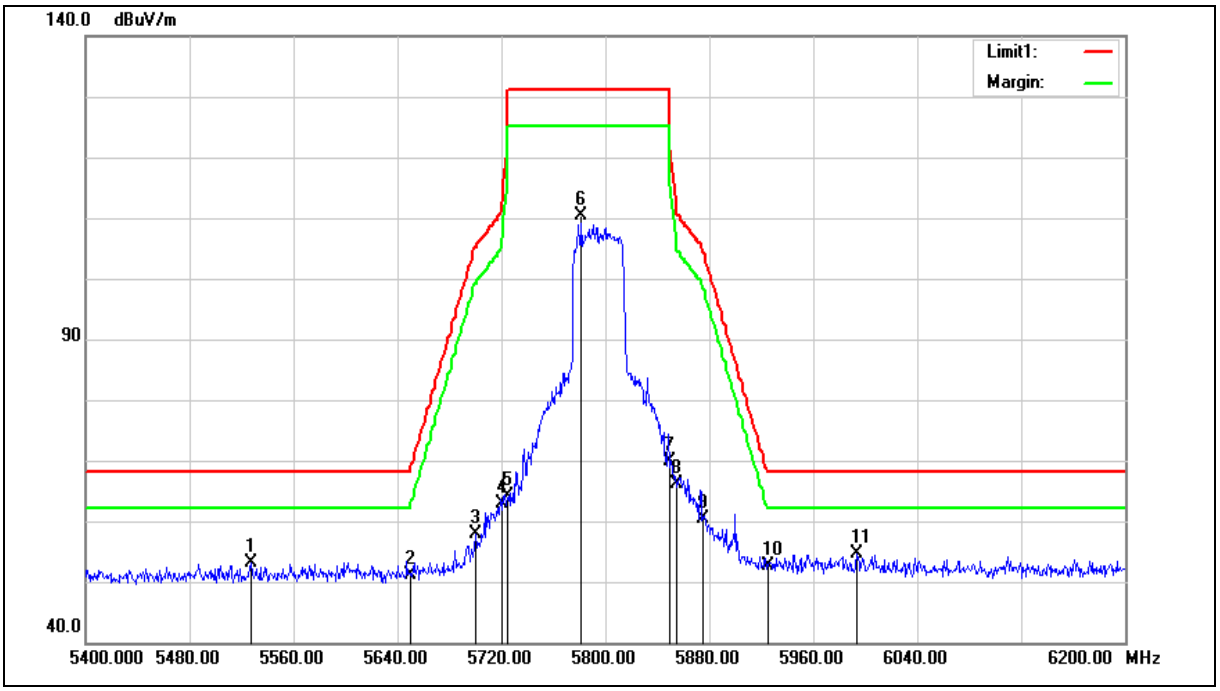

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5795 MHz		
Mode:	Mode 17		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5527.200	52.91	0.28	53.19	68.20	-15.01	peak
2	5650.000	50.63	0.62	51.25	68.20	-16.95	peak
3	5700.000	57.07	0.75	57.82	105.20	-47.38	peak
4	5720.000	62.19	0.81	63.00	110.80	-47.80	peak
5	5725.000	63.22	0.82	64.04	122.20	-58.16	peak
6	5781.600	109.28	0.98	110.26	--	--	peak
7	5850.000	68.70	1.17	69.87	122.20	-52.33	peak
8	5855.000	65.02	1.18	66.20	110.80	-44.60	peak
9	5875.000	59.04	1.23	60.27	105.20	-44.93	peak
10	5925.000	51.18	1.37	52.55	68.20	-15.65	peak
11	5993.600	52.95	1.56	54.51	68.20	-13.69	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5795 MHz		
Mode:	Mode 17		
Ant.Polar.:	Vertical		

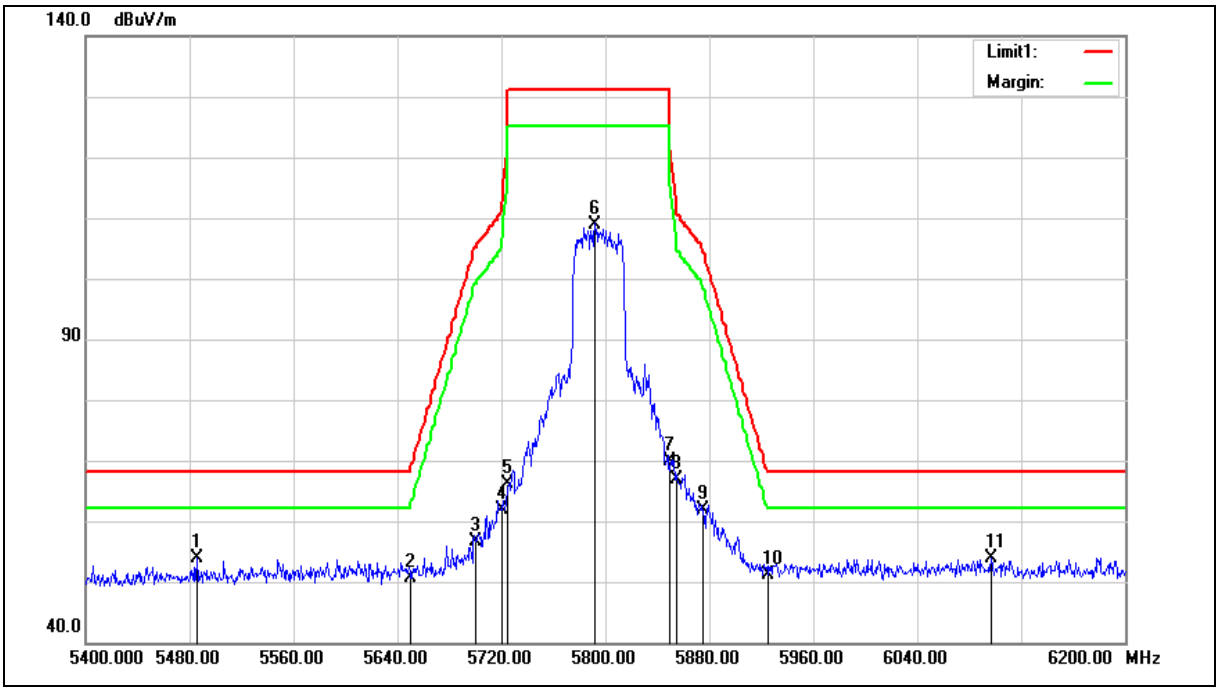

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5795 MHz		
Mode:	Mode 17		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5485.600	53.67	0.19	53.86	68.20	-14.34	peak
2	5650.000	49.94	0.62	50.56	68.20	-17.64	peak
3	5700.000	55.84	0.75	56.59	105.20	-48.61	peak
4	5720.000	61.06	0.81	61.87	110.80	-48.93	peak
5	5725.000	65.29	0.82	66.11	122.20	-56.09	peak
6	5792.000	107.96	1.01	108.97	--	--	peak
7	5850.000	68.63	1.17	69.80	122.20	-52.40	peak
8	5855.000	65.81	1.18	66.99	110.80	-43.81	peak
9	5875.000	60.76	1.23	61.99	105.20	-43.21	peak
10	5925.000	49.83	1.37	51.20	68.20	-17.00	peak
11	6096.800	52.05	1.92	53.97	68.20	-14.23	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5210 MHz		
Mode:	Mode 18		
Ant.Polar.:	Horizontal		

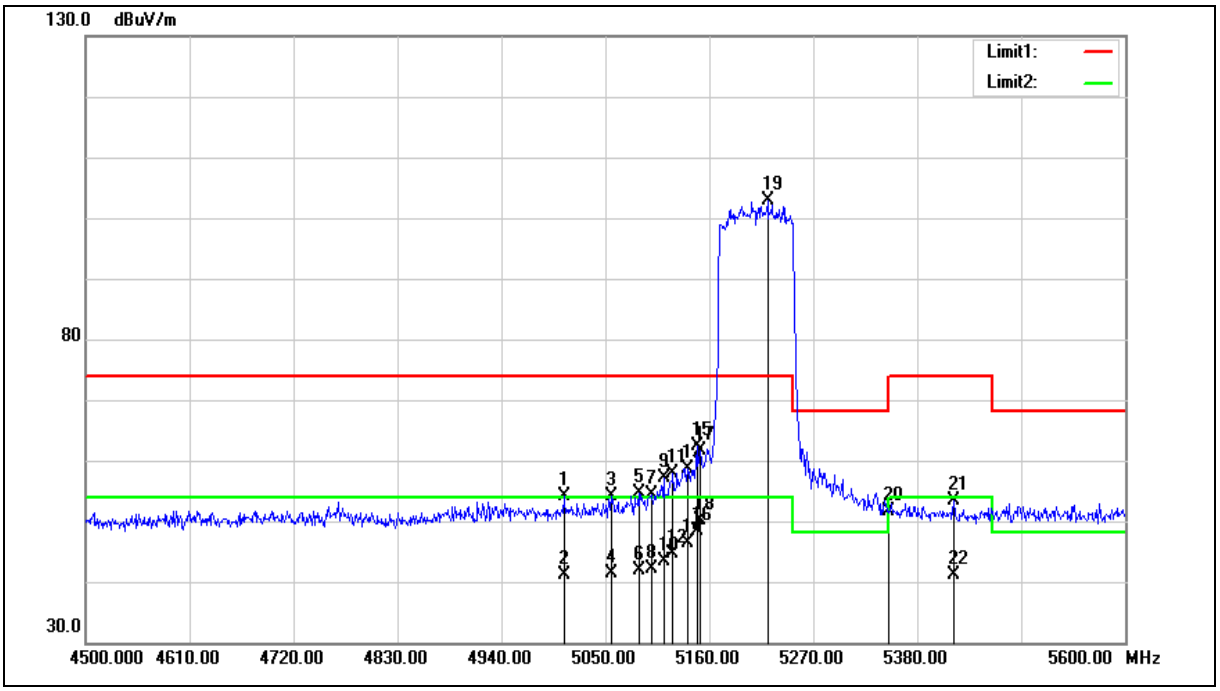

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5210 MHz		
Mode:	Mode 18		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5006.000	54.84	-0.77	54.07	74.00	-19.93	peak
2	5006.000	41.91	-0.77	41.14	54.00	-12.86	AVG
3	5056.600	54.67	-0.65	54.02	74.00	-19.98	peak
4	5056.600	42.04	-0.65	41.39	54.00	-12.61	AVG
5	5085.200	55.16	-0.60	54.56	74.00	-19.44	peak
6	5085.200	42.55	-0.60	41.95	54.00	-12.05	AVG
7	5099.500	54.89	-0.57	54.32	74.00	-19.68	peak
8	5099.500	42.75	-0.57	42.18	54.00	-11.82	AVG
9	5111.600	57.75	-0.55	57.20	74.00	-16.80	peak
10	5111.600	43.88	-0.55	43.33	54.00	-10.67	AVG
11	5121.500	58.36	-0.53	57.83	74.00	-16.17	peak
12	5121.500	45.12	-0.53	44.59	54.00	-9.41	AVG
13	5136.900	59.11	-0.50	58.61	74.00	-15.39	peak
14	5136.900	46.87	-0.50	46.37	54.00	-7.63	AVG
15	5146.800	62.81	-0.48	62.33	74.00	-11.67	peak
16	5146.800	48.78	-0.48	48.30	54.00	-5.70	AVG
17	5150.000	62.08	-0.48	61.60	74.00	-12.40	peak
18	5150.000	50.70	-0.48	50.22	54.00	-3.78	AVG
19	5221.600	103.25	-0.33	102.92	--	--	peak
20	5350.000	51.79	-0.08	51.71	74.00	-22.29	peak
21	5418.500	53.33	0.05	53.38	74.00	-20.62	peak
22	5418.500	41.06	0.05	41.11	54.00	-12.89	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5210 MHz		
Mode:	Mode 18		
Ant.Polar.:	Vertical		

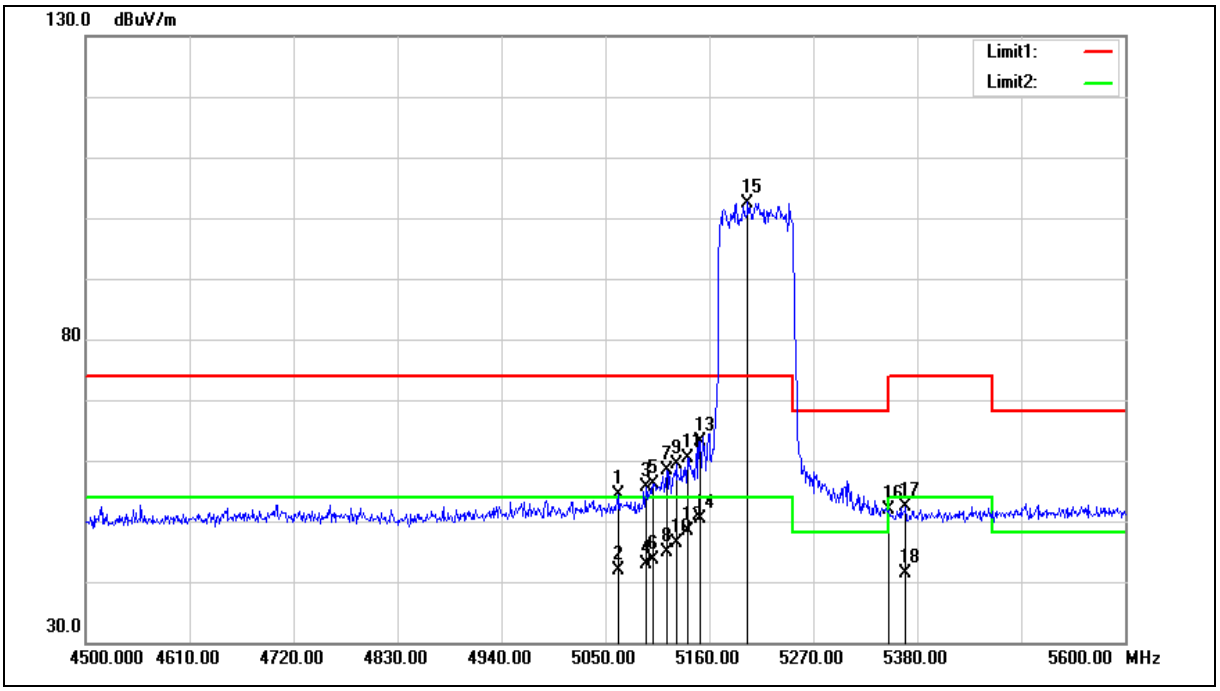

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5210 MHz		
Mode:	Mode 18		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5064.300	55.00	-0.65	54.35	74.00	-19.65	peak
2	5064.300	42.41	-0.65	41.76	54.00	-12.24	AVG
3	5092.900	56.27	-0.60	55.67	74.00	-18.33	peak
4	5092.900	43.41	-0.60	42.81	54.00	-11.19	AVG
5	5100.600	56.63	-0.57	56.06	74.00	-17.94	peak
6	5100.600	44.20	-0.57	43.63	54.00	-10.37	AVG
7	5114.900	58.89	-0.54	58.35	74.00	-15.65	peak
8	5114.900	45.46	-0.54	44.92	54.00	-9.08	AVG
9	5124.800	59.84	-0.52	59.32	74.00	-14.68	peak
10	5124.800	46.98	-0.52	46.46	54.00	-7.54	AVG
11	5136.900	60.91	-0.50	60.41	74.00	-13.59	peak
12	5136.900	48.88	-0.50	48.38	54.00	-5.62	AVG
13	5150.000	63.57	-0.48	63.09	74.00	-10.91	peak
14	5150.000	50.87	-0.48	50.39	54.00	-3.61	AVG
15	5200.700	102.87	-0.37	102.50	--	--	peak
16	5350.000	51.89	-0.08	51.81	74.00	-22.19	peak
17	5367.900	52.51	-0.05	52.46	74.00	-21.54	peak
18	5367.900	41.42	-0.05	41.37	54.00	-12.63	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5290 MHz		
Mode:	Mode 18		
Ant.Polar.:	Horizontal		

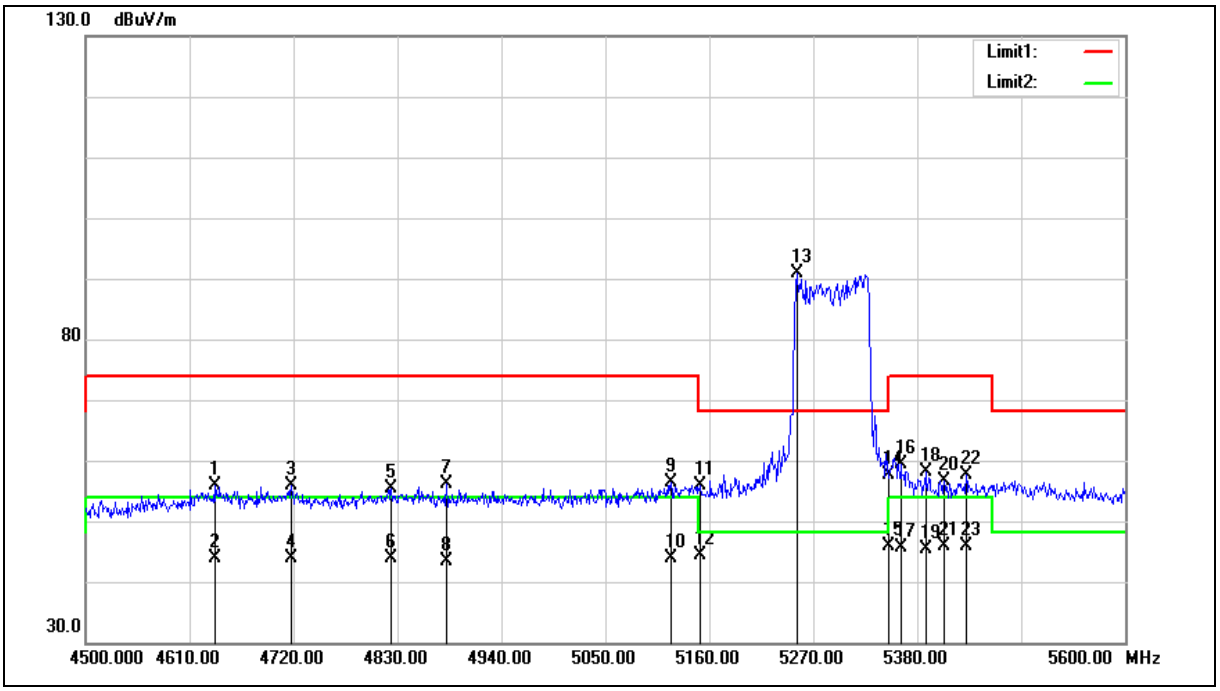

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5290 MHz		
Mode:	Mode 18		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4636.400	52.13	3.83	55.96	74.00	-18.04	peak
2	4636.400	40.02	3.83	43.85	54.00	-10.15	AVG
3	4717.800	51.89	4.03	55.92	74.00	-18.08	peak
4	4717.800	39.84	4.03	43.87	54.00	-10.13	AVG
5	4823.400	50.95	4.31	55.26	74.00	-18.74	peak
6	4823.400	39.49	4.31	43.80	54.00	-10.20	AVG
7	4881.700	51.72	4.45	56.17	74.00	-17.83	peak
8	4881.700	38.87	4.45	43.32	54.00	-10.68	AVG
9	5119.300	51.38	5.04	56.42	74.00	-17.58	peak
10	5119.300	38.84	5.04	43.88	54.00	-10.12	AVG
11	5150.000	50.64	5.12	55.76	74.00	-18.24	peak
12	5150.000	39.37	5.12	44.49	54.00	-9.51	AVG
13	5252.400	85.63	5.36	90.99	--	--	peak
14	5350.000	51.93	5.61	57.54	74.00	-16.46	peak
15	5350.000	40.26	5.61	45.87	54.00	-8.13	AVG
16	5362.400	53.74	5.64	59.38	74.00	-14.62	peak
17	5362.400	40.11	5.64	45.75	54.00	-8.25	AVG
18	5388.800	52.55	5.70	58.25	74.00	-15.75	peak
19	5388.800	39.72	5.70	45.42	54.00	-8.58	AVG
20	5408.600	50.87	5.76	56.63	74.00	-17.37	peak
21	5408.600	40.04	5.76	45.80	54.00	-8.20	AVG
22	5431.700	51.80	5.82	57.62	74.00	-16.38	peak
23	5431.700	40.13	5.82	45.95	74.00	-28.05	RMS

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5290 MHz		
Mode:	Mode 18		
Ant.Polar.:	Vertical		

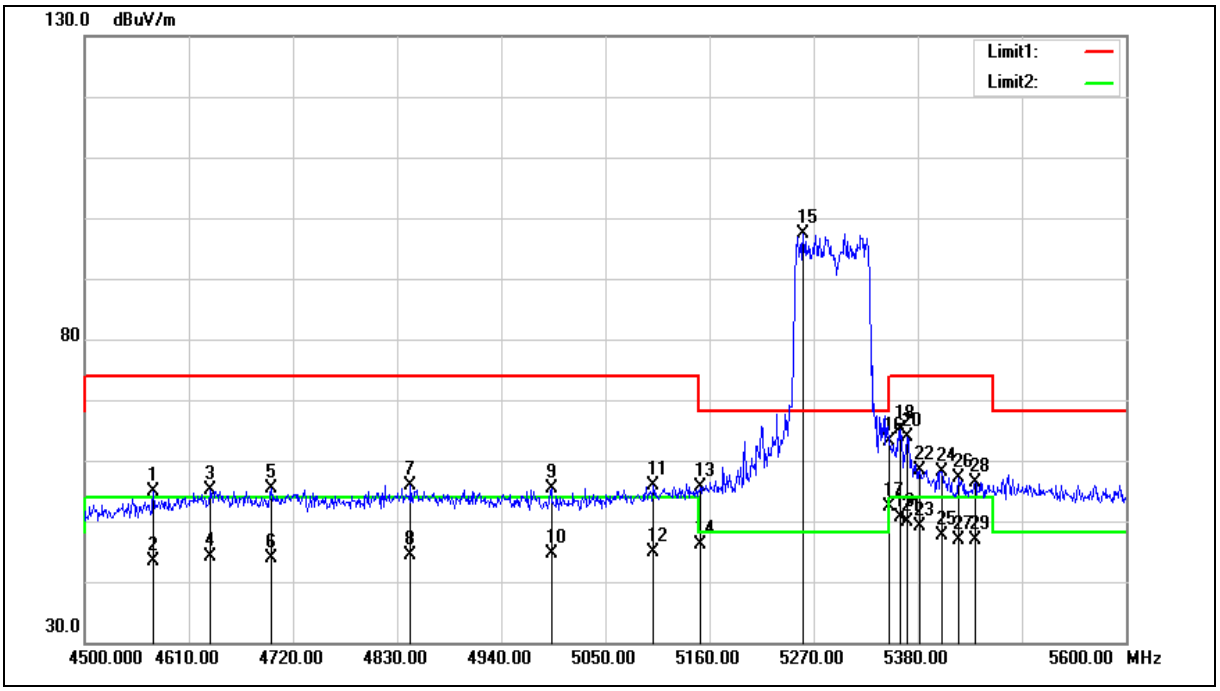

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5290 MHz		
Mode:	Mode 18		
Ant.Polar.:	Vertical		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4572.600	51.20	3.67	54.87	74.00	-19.13	peak
2	4572.600	39.79	3.67	43.46	54.00	-10.54	AVG
3	4632.000	51.38	3.81	55.19	74.00	-18.81	peak
4	4632.000	40.24	3.81	44.05	54.00	-9.95	AVG
5	4696.900	51.46	3.99	55.45	74.00	-18.55	peak
6	4696.900	39.84	3.99	43.83	54.00	-10.17	AVG
7	4844.300	51.62	4.35	55.97	74.00	-18.03	peak
8	4844.300	40.01	4.35	44.36	54.00	-9.64	AVG
9	4992.800	50.63	4.73	55.36	74.00	-18.64	peak
10	4992.800	39.89	4.73	44.62	54.00	-9.38	AVG
11	5100.600	50.98	4.99	55.97	74.00	-18.03	peak
12	5100.600	39.91	4.99	44.90	54.00	-9.10	AVG
13	5150.000	50.63	5.12	55.75	74.00	-18.25	peak
14	5150.000	41.10	5.12	46.22	54.00	-7.78	AVG
15	5259.000	92.06	5.39	97.45	--	--	peak
16	5350.000	57.44	5.61	63.05	74.00	-10.95	peak
17	5350.000	46.67	5.61	52.28	54.00	-1.72	AVG
18	5361.300	59.49	5.64	65.13	74.00	-8.87	peak
19	5361.300	45.07	5.64	50.71	54.00	-3.29	AVG
20	5369.000	58.14	5.65	63.79	74.00	-10.21	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5290 MHz		
Mode:	Mode 18		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
21	5369.000	44.34	5.65	49.99	54.00	-4.01	AVG
22	5382.200	52.68	5.69	58.37	74.00	-15.63	peak
23	5382.200	43.39	5.69	49.08	54.00	-4.92	AVG
24	5405.300	52.39	5.74	58.13	74.00	-15.87	peak
25	5405.300	41.80	5.74	47.54	54.00	-6.46	AVG
26	5422.900	51.37	5.79	57.16	74.00	-16.84	peak
27	5422.900	41.06	5.79	46.85	54.00	-7.15	AVG
28	5440.500	50.52	5.82	56.34	74.00	-17.66	peak
29	5440.500	41.01	5.82	46.83	54.00	-7.17	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5530 MHz		
Mode:	Mode 18		
Ant.Polar.:	Horizontal		

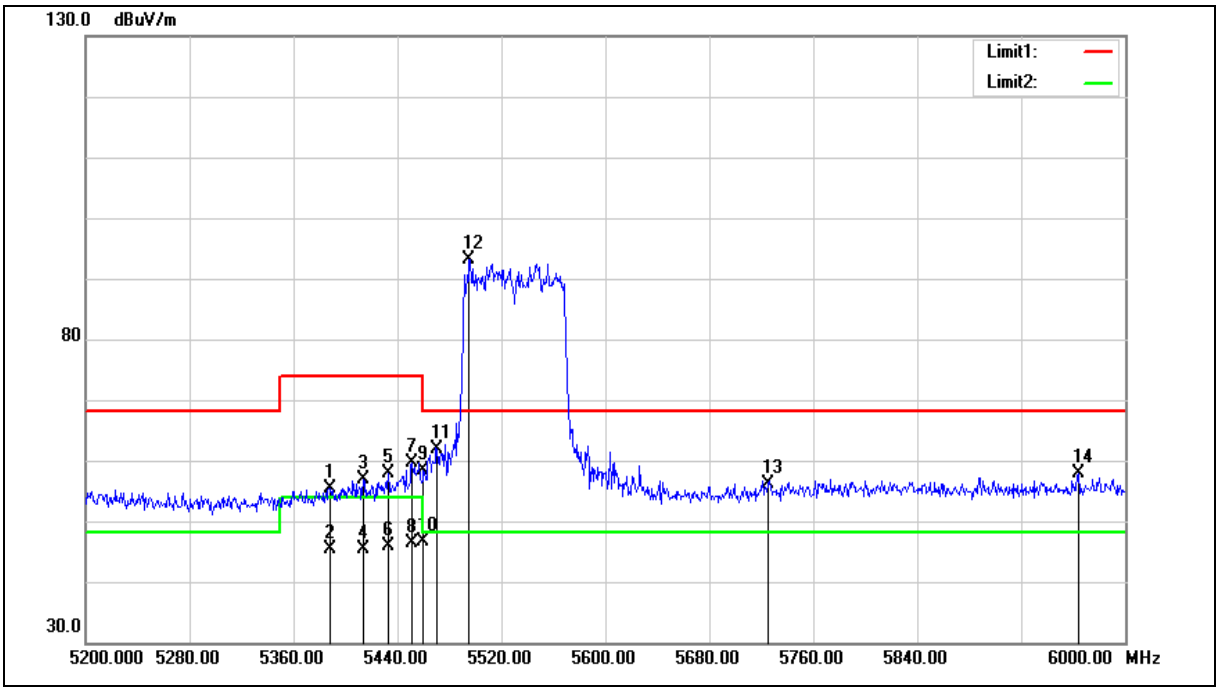

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5530 MHz		
Mode:	Mode 18		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5388.000	49.74	5.70	55.44	74.00	-18.56	peak
2	5388.000	39.56	5.70	45.26	54.00	-8.74	AVG
3	5413.600	51.20	5.76	56.96	74.00	-17.04	peak
4	5413.600	39.71	5.76	45.47	54.00	-8.53	AVG
5	5432.800	52.06	5.82	57.88	74.00	-16.12	peak
6	5432.800	39.99	5.82	45.81	54.00	-8.19	AVG
7	5451.200	53.88	5.85	59.73	74.00	-14.27	peak
8	5451.200	40.55	5.85	46.40	54.00	-7.60	AVG
9	5460.000	52.52	5.88	58.40	74.00	-15.60	peak
10	5460.000	40.75	5.88	46.63	54.00	-7.37	AVG
11	5470.000	55.98	5.91	61.89	68.20	-6.31	peak
12	5495.200	87.24	5.97	93.21	--	--	peak
13	5725.000	49.70	6.47	56.17	68.20	-12.03	peak
14	5964.000	50.84	7.01	57.85	68.20	-10.35	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5530 MHz		
Mode:	Mode 18		
Ant.Polar.:	Vertical		

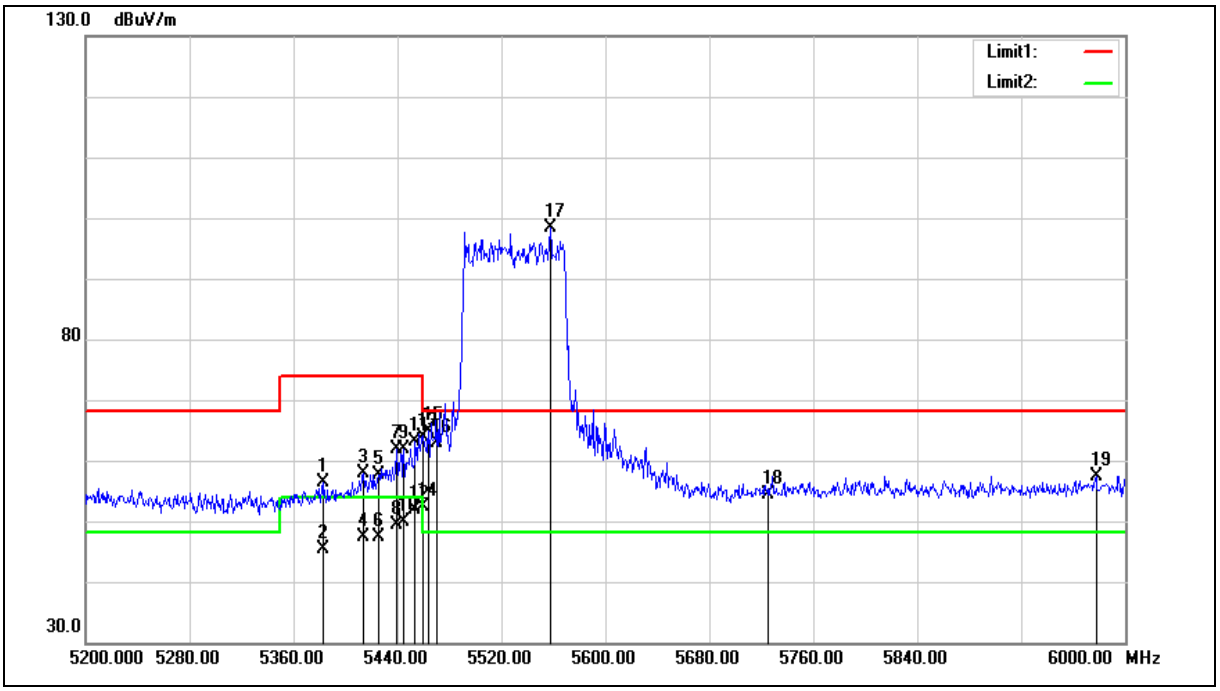

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5530 MHz		
Mode:	Mode 18		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5383.200	50.77	5.69	56.46	74.00	-17.54	peak
2	5383.200	39.72	5.69	45.41	54.00	-8.59	AVG
3	5413.600	52.11	5.76	57.87	74.00	-16.13	peak
4	5413.600	41.74	5.76	47.50	54.00	-6.50	AVG
5	5425.600	51.80	5.80	57.60	74.00	-16.40	peak
6	5425.600	41.67	5.80	47.47	54.00	-6.53	AVG
7	5439.200	56.16	5.82	61.98	74.00	-12.02	peak
8	5439.200	43.54	5.82	49.36	54.00	-4.64	AVG
9	5444.800	55.94	5.84	61.78	74.00	-12.22	peak
10	5444.800	44.06	5.84	49.90	54.00	-4.10	AVG
11	5453.600	57.34	5.86	63.20	74.00	-10.80	peak
12	5453.600	45.98	5.86	51.84	54.00	-2.16	AVG
13	5460.000	58.09	5.88	63.97	74.00	-10.03	peak
14	5460.000	46.44	5.88	52.32	54.00	-1.68	AVG
15	5464.000	59.09	5.89	64.98	68.20	-3.22	peak
16	5470.000	56.91	5.91	62.82	68.20	-5.38	peak
17	5557.600	92.22	6.11	98.33	--	--	peak
18	5725.000	47.82	6.47	54.29	68.20	-13.91	peak
19	5977.600	50.45	7.04	57.49	68.20	-10.71	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5775 MHz		
Mode:	Mode 18		
Ant.Polar.:	Horizontal		

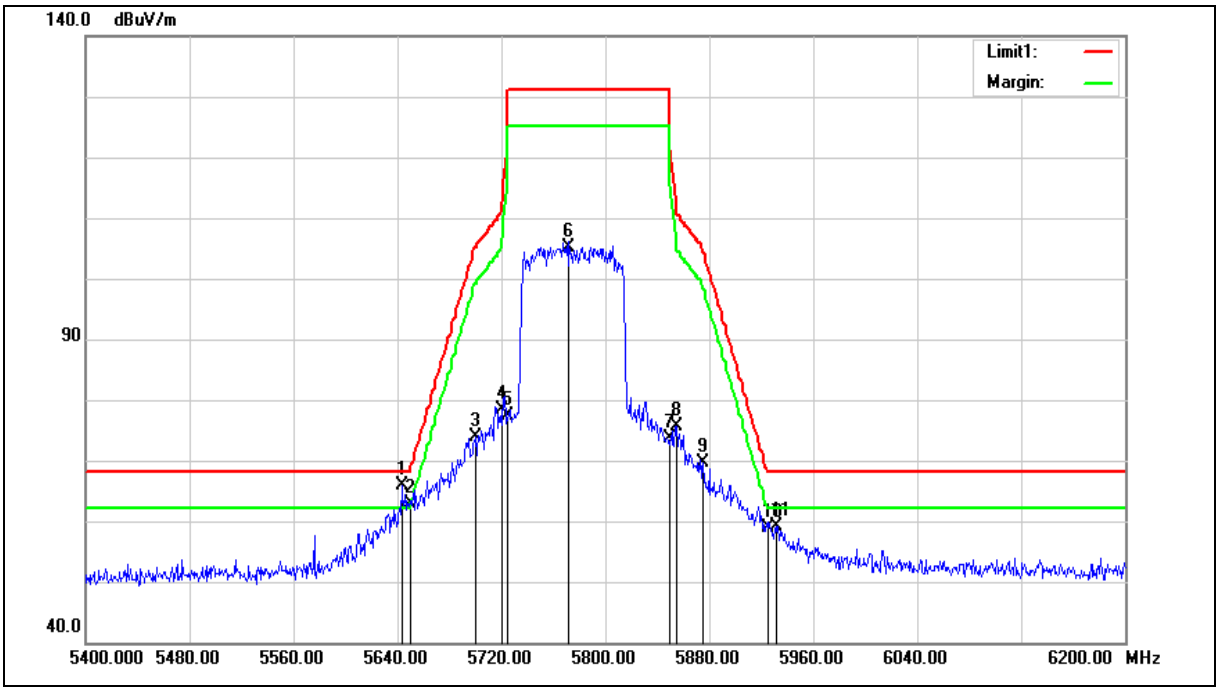

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5775 MHz		
Mode:	Mode 18		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5643.200	65.17	0.60	65.77	68.20	-2.43	peak
2	5650.000	62.37	0.62	62.99	68.20	-5.21	peak
3	5700.000	73.17	0.75	73.92	105.20	-31.28	peak
4	5720.000	77.66	0.81	78.47	110.80	-32.33	peak
5	5725.000	76.58	0.82	77.40	122.20	-44.80	peak
6	5772.000	104.30	0.95	105.25	--	--	peak
7	5850.000	72.43	1.17	73.60	122.20	-48.60	peak
8	5855.000	74.36	1.18	75.54	110.80	-35.26	peak
9	5875.000	68.34	1.23	69.57	105.20	-35.63	peak
10	5925.000	57.39	1.37	58.76	68.20	-9.44	peak
11	5932.000	57.85	1.38	59.23	68.20	-8.97	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5775 MHz		
Mode:	Mode 18		
Ant.Polar.:	Vertical		

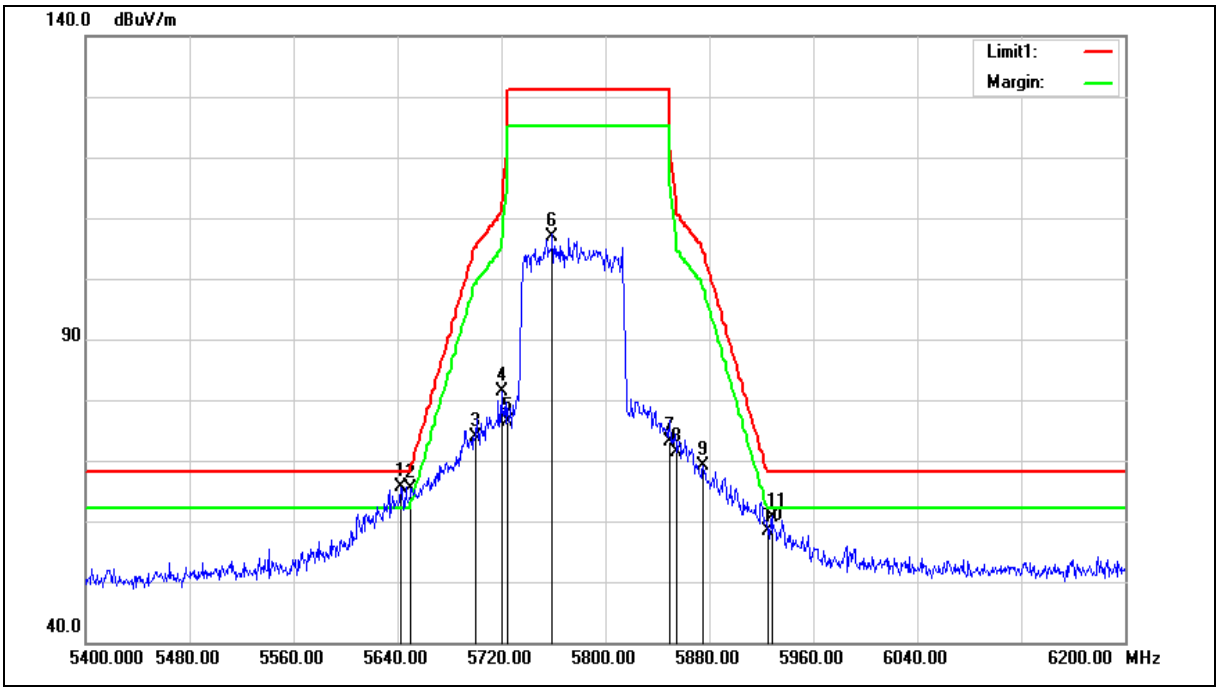

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5775 MHz		
Mode:	Mode 18		
Ant.Polar.:	Vertical		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5642.400	64.95	0.60	65.55	68.20	-2.65	peak
2	5650.000	64.79	0.62	65.41	68.20	-2.79	peak
3	5700.000	73.24	0.75	73.99	105.20	-31.21	peak
4	5720.000	80.47	0.81	81.28	110.80	-29.52	peak
5	5725.000	75.56	0.82	76.38	122.20	-45.82	peak
6	5759.200	105.88	0.91	106.79	--	--	peak
7	5850.000	71.91	1.17	73.08	122.20	-49.12	peak
8	5855.000	70.09	1.18	71.27	110.80	-39.53	peak
9	5875.000	67.81	1.23	69.04	105.20	-36.16	peak
10	5925.000	56.97	1.37	58.34	68.20	-9.86	peak
11	5928.000	59.38	1.37	60.75	68.20	-7.45	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Annex E. Conducted Test Results (5 GHz)

Maximum Conducted Output Power

操作模式	Data Rate (Mbps)	頻道 CH	頻率 MHz	最大傳導輸出功率(Average)										Limit (dBm)
				ANT-0		ANT-1		ANT-2		ANT-3		ANT-0+1+2+3		
				dBm	W	dBm	W	dBm	W	dBm	W	dBm	W	
Mode 10	6	36	5180	16.45	0.044	16.64	0.046	16.45	0.044	16.68	0.047	22.58	0.181	≦ 30.00
		40	5200	16.41	0.044	16.62	0.046	16.49	0.045	16.76	0.047	22.59	0.182	≦ 30.00
		44	5220	16.35	0.043	16.60	0.046	16.42	0.044	16.78	0.048	22.56	0.180	≦ 30.00
		48	5240	16.52	0.045	16.89	0.049	16.43	0.044	16.83	0.048	**22.69**	**0.186**	≦ 30.00
		52	5260	11.35	0.014	10.86	0.012	10.61	0.012	11.09	0.013	17.01	0.050	≦ 23.91
		56	5280	12.01	0.016	11.07	0.013	11.41	0.014	11.45	0.014	17.52	0.056	≦ 23.91
		60	5300	11.52	0.014	10.99	0.013	10.73	0.012	11.28	0.013	17.16	0.052	≦ 23.91
		64	5320	11.54	0.014	10.96	0.012	10.86	0.012	11.19	0.013	17.17	0.052	≦ 23.91
		100	5500	11.16	0.013	10.66	0.012	10.63	0.012	10.72	0.012	16.82	0.048	≦ 23.90
		104	5520	10.98	0.013	10.23	0.011	10.36	0.011	10.13	0.010	16.46	0.044	≦ 23.90
		108	5540	10.95	0.012	10.21	0.010	10.38	0.011	10.17	0.010	16.46	0.044	≦ 23.90
		112	5560	11.19	0.013	10.34	0.011	10.43	0.011	10.21	0.010	16.58	0.045	≦ 23.90
		116	5580	11.07	0.013	10.16	0.010	10.33	0.011	10.16	0.010	16.47	0.044	≦ 23.90
		132	5660	10.51	0.011	9.98	0.010	10.08	0.010	10.07	0.010	16.19	0.042	≦ 23.90
		136	5680	10.55	0.011	9.93	0.010	10.13	0.010	10.20	0.010	16.23	0.042	≦ 23.90
		140	5700	10.54	0.011	9.99	0.010	10.19	0.010	10.47	0.011	16.32	0.043	≦ 23.90
		149	5745	19.19	0.083	18.85	0.077	19.39	0.087	19.18	0.083	25.18	0.330	≦ 30.00
		153	5765	19.14	0.082	18.67	0.074	19.42	0.087	19.18	0.083	25.13	0.326	≦ 30.00
		157	5785	19.28	0.085	18.75	0.075	19.50	0.089	19.30	0.085	25.24	0.334	≦ 30.00
		161	5805	19.16	0.082	18.69	0.074	19.49	0.089	19.23	0.084	25.17	0.329	≦ 30.00
		165	5825	19.48	0.089	19.12	0.082	19.51	0.089	19.42	0.087	**25.41**	**0.348**	≦ 30.00

操作模式	Data Rate (Mbps)	頻道 CH	頻率 MHz	最大傳導輸出功率(Average)										Limit (dBm)
				ANT-0		ANT-1		ANT-2		ANT-3		ANT-0+1+2+3		
				dBm	W	dBm	W	dBm	W	dBm	W	dBm	W	
Mode 11	26	36	5180	18.11	0.065	18.15	0.065	18.12	0.065	18.13	0.065	24.15	0.260	≦ 30.00
		40	5200	19.13	0.082	19.04	0.080	19.05	0.080	19.18	0.083	25.12	0.325	≦ 30.00
		44	5220	19.18	0.083	19.04	0.080	18.86	0.077	19.11	0.081	25.07	0.321	≦ 30.00
		48	5240	19.24	0.084	19.08	0.081	19.09	0.081	19.23	0.084	**25.18**	**0.330**	≦ 30.00
		52	5260	16.50	0.045	15.98	0.040	16.06	0.040	16.25	0.042	22.22	0.167	≦ 24.00
		56	5280	16.69	0.047	16.35	0.043	16.24	0.042	16.50	0.045	22.47	0.177	≦ 24.00
		60	5300	16.75	0.047	16.17	0.041	16.21	0.042	16.49	0.045	22.43	0.175	≦ 24.00
		64	5320	17.20	0.052	16.19	0.042	16.29	0.043	16.58	0.045	22.60	0.182	≦ 24.00
		100	5500	16.04	0.040	15.45	0.035	15.46	0.035	15.53	0.036	21.65	0.146	≦ 24.00
		104	5520	16.02	0.040	15.29	0.034	15.47	0.035	15.49	0.035	21.60	0.145	≦ 24.00
		108	5540	15.87	0.039	15.25	0.033	15.39	0.035	15.56	0.036	21.54	0.143	≦ 24.00
		112	5560	16.28	0.042	15.35	0.034	15.48	0.035	15.47	0.035	21.68	0.147	≦ 24.00
		116	5580	16.19	0.042	15.35	0.034	15.42	0.035	15.43	0.035	21.63	0.146	≦ 24.00
		132	5660	16.00	0.040	15.26	0.034	15.35	0.034	15.39	0.035	21.53	0.142	≦ 24.00
		136	5680	16.03	0.040	15.31	0.034	15.26	0.034	15.43	0.035	21.54	0.143	≦ 24.00
		140	5700	15.94	0.039	15.40	0.035	15.40	0.035	15.61	0.036	21.61	0.145	≦ 24.00
		149	5745	18.99	0.079	18.69	0.074	19.14	0.082	19.13	0.082	25.01	0.317	≦ 30.00
		153	5765	19.05	0.080	18.62	0.073	19.29	0.085	19.13	0.082	25.05	0.320	≦ 30.00
		157	5785	19.06	0.081	18.74	0.075	19.27	0.085	19.28	0.085	25.11	0.324	≦ 30.00
		161	5805	19.06	0.081	18.69	0.074	19.37	0.086	19.14	0.082	25.09	0.323	≦ 30.00
		165	5825	19.49	0.089	18.76	0.075	19.41	0.087	19.31	0.085	**25.27**	**0.337**	≦ 30.00
Mode 12	54	38	5190	16.68	0.047	16.67	0.046	16.56	0.045	16.92	0.049	22.73	0.187	≦ 30.00
		46	5230	19.57	0.091	19.56	0.090	19.26	0.084	19.42	0.087	**25.47**	**0.352**	≦ 30.00
		54	5270	17.88	0.061	17.32	0.054	17.53	0.057	17.63	0.058	23.62	0.230	≦ 24.00
		62	5310	16.63	0.046	15.92	0.039	16.22	0.042	16.59	0.046	22.37	0.173	≦ 24.00
		102	5510	17.71	0.059	17.00	0.050	16.98	0.050	17.39	0.055	23.30	0.214	≦ 24.00
		110	5550	18.13	0.065	17.50	0.056	17.41	0.055	17.48	0.056	23.66	0.232	≦ 24.00
		134	5670	17.54	0.057	17.29	0.054	17.13	0.052	17.28	0.053	23.33	0.215	≦ 24.00
		151	5755	19.23	0.084	19.11	0.081	19.75	0.094	19.37	0.086	25.39	0.346	≦ 30.00
		159	5795	19.25	0.084	19.06	0.081	19.93	0.098	19.49	0.089	**25.47**	**0.352**	≦ 30.00

操作模式	Data Rate (Mbps)	頻道 CH	頻率 MHz	最大傳導輸出功率(Average)										Limit (dBm)
				ANT-0		ANT-1		ANT-2		ANT-3		ANT-0+1+2+3		
				dBm	W	dBm	W	dBm	W	dBm	W	dBm	W	
Mode 13	26	36	5180	18.13	0.065	18.28	0.067	18.25	0.067	18.25	0.067	24.25	0.266	≦ 30.00
		40	5200	19.20	0.083	19.17	0.083	19.13	0.082	19.25	0.084	25.21	0.332	≦ 30.00
		44	5220	19.28	0.085	19.16	0.082	19.00	0.079	19.20	0.083	25.18	0.330	≦ 30.00
		48	5240	19.34	0.086	19.21	0.083	19.23	0.084	19.26	0.084	**25.28**	**0.337**	≦ 30.00
		52	5260	16.51	0.045	16.12	0.041	16.07	0.040	16.26	0.042	22.26	0.168	≦ 24.00
		56	5280	16.82	0.048	16.42	0.044	16.32	0.043	16.61	0.046	22.57	0.181	≦ 24.00
		60	5300	16.76	0.047	16.25	0.042	16.28	0.042	16.51	0.045	22.48	0.177	≦ 24.00
		64	5320	17.22	0.053	16.27	0.042	16.34	0.043	16.59	0.046	22.64	0.184	≦ 24.00
		100	5500	16.07	0.040	15.52	0.036	15.51	0.036	15.61	0.036	21.70	0.148	≦ 24.00
		104	5520	16.05	0.040	15.41	0.035	15.55	0.036	15.55	0.036	21.67	0.147	≦ 24.00
		108	5540	15.95	0.039	15.33	0.034	15.49	0.035	15.58	0.036	21.61	0.145	≦ 24.00
		112	5560	16.35	0.043	15.42	0.035	15.57	0.036	15.60	0.036	21.77	0.150	≦ 24.00
		116	5580	16.31	0.043	15.40	0.035	15.44	0.035	15.52	0.036	21.70	0.148	≦ 24.00
		132	5660	16.02	0.040	15.29	0.034	15.38	0.035	15.51	0.036	21.58	0.144	≦ 24.00
		136	5680	16.04	0.040	15.34	0.034	15.35	0.034	15.56	0.036	21.60	0.145	≦ 24.00
		140	5700	15.97	0.040	15.44	0.035	15.46	0.035	15.72	0.037	21.67	0.147	≦ 24.00
		149	5745	19.07	0.081	18.79	0.076	19.20	0.083	19.17	0.083	25.08	0.322	≦ 30.00
		153	5765	19.08	0.081	18.69	0.074	19.30	0.085	19.18	0.083	25.09	0.323	≦ 30.00
		157	5785	19.13	0.082	18.82	0.076	19.36	0.086	19.32	0.086	25.18	0.330	≦ 30.00
		161	5805	19.11	0.081	18.75	0.075	19.41	0.087	19.27	0.085	25.16	0.328	≦ 30.00
		165	5825	19.56	0.090	18.83	0.076	19.56	0.090	19.41	0.087	**25.37**	**0.344**	≦ 30.00
Mode 14	54	38	5190	16.70	0.047	16.78	0.048	16.57	0.045	17.02	0.050	22.79	0.190	≦ 30.00
		46	5230	19.60	0.091	19.62	0.092	19.39	0.087	19.55	0.090	25.56	0.360	≦ 30.00
		54	5270	18.00	0.063	17.45	0.056	17.62	0.058	17.71	0.059	23.72	0.236	≦ 24.00
		62	5310	16.76	0.047	16.04	0.040	16.28	0.042	16.64	0.046	22.46	0.176	≦ 24.00
		102	5510	17.73	0.059	17.07	0.051	17.09	0.051	17.43	0.055	23.36	0.217	≦ 24.00
		110	5550	18.14	0.065	17.57	0.057	17.53	0.057	17.60	0.058	23.74	0.237	≦ 24.00
		134	5670	17.66	0.058	17.34	0.054	17.16	0.052	17.33	0.054	23.40	0.219	≦ 24.00
		151	5755	19.27	0.085	19.13	0.082	19.87	0.097	19.49	0.089	25.47	0.352	≦ 30.00
		159	5795	19.35	0.086	19.17	0.083	19.98	0.100	19.54	0.090	**25.54**	**0.358**	≦ 30.00
Mode 15	117.2	42	5210	16.58	0.045	16.43	0.044	16.21	0.042	16.63	0.046	**22.49**	**0.177**	≦ 30.00
		58	5290	16.41	0.044	16.34	0.043	16.42	0.044	16.55	0.045	22.45	0.176	≦ 24.00
		106	5530	16.61	0.046	16.14	0.041	15.92	0.039	16.22	0.042	22.25	0.168	≦ 24.00
		155	5775	19.29	0.085	18.81	0.076	19.79	0.095	19.37	0.086	**25.35**	**0.343**	≦ 30.00

操作模式	Data Rate (Mbps)	頻道 CH	頻率 MHz	最大傳導輸出功率(Average)										Limit (dBm)
				ANT-0		ANT-1		ANT-2		ANT-3		ANT-0+1+2+3		
				dBm	W	dBm	W	dBm	W	dBm	W	dBm	W	
Mode 16	MCS0	36	5180	18.02	0.063	18.25	0.067	18.16	0.065	18.11	0.065	24.16	0.261	≦ 30.00
		40	5200	19.66	0.092	19.49	0.089	19.32	0.086	19.59	0.091	**25.54**	**0.358**	≦ 30.00
		44	5220	19.45	0.088	19.39	0.087	19.11	0.081	19.37	0.086	25.35	0.343	≦ 30.00
		48	5240	19.63	0.092	19.58	0.091	19.29	0.085	19.50	0.089	25.52	0.356	≦ 30.00
		52	5260	16.84	0.048	16.04	0.040	16.29	0.043	16.50	0.045	22.45	0.176	≦ 24.00
		56	5280	17.27	0.053	16.42	0.044	16.57	0.045	16.81	0.048	22.80	0.191	≦ 24.00
		60	5300	16.92	0.049	16.31	0.043	16.41	0.044	16.61	0.046	22.59	0.182	≦ 24.00
		64	5320	16.74	0.047	15.92	0.039	16.14	0.041	16.49	0.045	22.35	0.172	≦ 24.00
		100	5500	16.37	0.043	15.61	0.036	15.88	0.039	15.83	0.038	21.95	0.157	≦ 24.00
		104	5520	16.11	0.041	15.17	0.033	15.27	0.034	15.60	0.036	21.57	0.144	≦ 24.00
		108	5540	16.16	0.041	15.14	0.033	15.26	0.034	15.58	0.036	21.57	0.144	≦ 24.00
		112	5560	16.29	0.043	15.24	0.033	15.32	0.034	15.64	0.037	21.66	0.147	≦ 24.00
		116	5580	16.16	0.041	15.15	0.033	15.30	0.034	15.61	0.036	21.59	0.144	≦ 24.00
		132	5660	15.72	0.037	14.92	0.031	15.27	0.034	15.41	0.035	21.36	0.137	≦ 24.00
		136	5680	15.54	0.036	15.14	0.033	15.22	0.033	15.53	0.036	21.38	0.137	≦ 24.00
		140	5700	15.64	0.037	15.03	0.032	15.29	0.034	15.62	0.036	21.42	0.139	≦ 24.00
		149	5745	19.04	0.080	18.75	0.075	19.57	0.091	19.27	0.085	25.19	0.330	≦ 30.00
		153	5765	19.20	0.083	19.01	0.080	19.61	0.091	19.26	0.084	25.30	0.339	≦ 30.00
		157	5785	19.41	0.087	19.03	0.080	19.66	0.092	19.44	0.088	25.41	0.348	≦ 30.00
		161	5805	19.23	0.084	18.91	0.078	19.62	0.092	19.20	0.083	25.27	0.337	≦ 30.00
		165	5825	19.73	0.094	19.32	0.086	19.52	0.090	19.69	0.093	**25.59**	**0.362**	≦ 30.00
Mode 17	MCS0	38	5190	16.95	0.050	16.96	0.050	16.84	0.048	16.88	0.049	22.93	0.196	≦ 30.00
		46	5230	19.78	0.095	19.86	0.097	19.53	0.090	19.77	0.095	**25.76**	**0.377**	≦ 30.00
		54	5270	18.16	0.065	17.55	0.057	17.84	0.061	17.91	0.062	23.89	0.245	≦ 24.00
		62	5310	16.82	0.048	16.14	0.041	16.42	0.044	16.60	0.046	22.52	0.179	≦ 24.00
		102	5510	17.68	0.059	17.41	0.055	17.34	0.054	17.51	0.056	23.51	0.224	≦ 24.00
		110	5550	18.12	0.065	17.62	0.058	17.63	0.058	17.66	0.058	23.78	0.239	≦ 24.00
		134	5670	17.81	0.060	17.44	0.055	17.40	0.055	17.41	0.055	23.54	0.226	≦ 24.00
		151	5755	19.44	0.088	19.24	0.084	19.85	0.097	19.55	0.090	25.55	0.359	≦ 30.00
		159	5795	19.44	0.088	19.20	0.083	20.07	0.102	19.84	0.096	**25.67**	**0.369**	≦ 30.00
Mode 18	MCS0	42	5210	16.13	0.041	16.32	0.043	16.01	0.040	16.31	0.043	**22.22**	**0.167**	≦ 30.00
		58	5290	16.64	0.046	16.52	0.045	16.74	0.047	16.82	0.048	22.70	0.186	≦ 24.00
		106	5530	16.81	0.048	16.42	0.044	16.22	0.042	16.54	0.045	22.52	0.179	≦ 24.00
		155	5775	19.19	0.083	19.24	0.084	19.87	0.097	19.39	0.087	**25.45**	**0.351**	≦ 30.00

Beamforming on

操作模式	Data Rate (Mbps)	頻道 CH	頻率 MHz	最大傳導輸出功率(Average)										Limit (dBm)
				ANT-0		ANT-1		ANT-2		ANT-3		ANT-0+1+2+3		
				dBm	W	dBm	W	dBm	W	dBm	W	dBm	W	
Mode 11	26	36	5180	11.71	0.015	12.06	0.016	12.05	0.016	11.96	0.016	17.97	0.063	≦ 25.35
		40	5200	12.82	0.019	13.03	0.020	12.86	0.019	13.12	0.021	18.98	0.079	≦ 25.35
		44	5220	12.76	0.019	12.97	0.020	12.67	0.018	12.96	0.020	18.86	0.077	≦ 25.35
		48	5240	12.93	0.020	13.08	0.020	13.00	0.020	13.20	0.021	**19.07**	**0.081**	≦ 25.35
		52	5260	10.09	0.010	9.68	0.009	9.45	0.009	9.67	0.009	15.75	0.038	≦ 19.35
		56	5280	10.38	0.011	9.71	0.009	10.07	0.010	10.15	0.010	16.10	0.041	≦ 19.35
		60	5300	10.34	0.011	9.58	0.009	9.69	0.009	10.10	0.010	15.96	0.039	≦ 19.35
		64	5320	10.33	0.011	9.57	0.009	9.87	0.010	10.10	0.010	16.00	0.040	≦ 19.35
		100	5500	9.31	0.009	8.89	0.008	9.06	0.008	9.03	0.008	15.10	0.032	≦ 19.21
		104	5520	9.52	0.009	8.75	0.007	8.87	0.008	9.05	0.008	15.08	0.032	≦ 19.21
		108	5540	9.50	0.009	8.68	0.007	8.93	0.008	9.03	0.008	15.07	0.032	≦ 19.21
		112	5560	9.72	0.009	8.80	0.008	9.19	0.008	9.12	0.008	15.24	0.033	≦ 19.21
		116	5580	9.73	0.009	8.62	0.007	9.04	0.008	8.97	0.008	15.13	0.033	≦ 19.21
		132	5660	9.62	0.009	8.80	0.008	9.17	0.008	9.02	0.008	15.18	0.033	≦ 19.21
		136	5680	9.51	0.009	8.77	0.008	9.02	0.008	8.91	0.008	15.08	0.032	≦ 19.21
		140	5700	9.71	0.009	8.99	0.008	9.24	0.008	9.31	0.009	15.34	0.034	≦ 19.21
		149	5745	12.65	0.018	12.62	0.018	13.20	0.021	13.07	0.020	18.91	0.078	≦ 25.31
		153	5765	12.55	0.018	12.62	0.018	13.17	0.021	13.04	0.020	18.87	0.077	≦ 25.31
		157	5785	12.69	0.019	12.53	0.018	13.05	0.020	13.06	0.020	18.86	0.077	≦ 25.31
		161	5805	12.71	0.019	12.50	0.018	12.91	0.020	12.99	0.020	18.80	0.076	≦ 25.31
		165	5825	13.27	0.021	12.74	0.019	13.37	0.022	13.11	0.020	**19.15**	**0.082**	≦ 25.31
Mode 12	54	38	5190	10.11	0.010	10.38	0.011	10.05	0.010	10.19	0.010	16.20	0.042	≦ 25.35
		46	5230	13.22	0.021	13.28	0.021	13.08	0.020	13.33	0.022	**19.25**	**0.084**	≦ 25.35
		54	5270	11.72	0.015	11.21	0.013	11.37	0.014	11.55	0.014	17.49	0.056	≦ 19.35
		62	5310	10.31	0.011	9.66	0.009	9.93	0.010	10.15	0.010	16.04	0.040	≦ 19.35
		102	5510	11.09	0.013	10.54	0.011	10.76	0.012	10.80	0.012	16.82	0.048	≦ 19.21
		110	5550	11.62	0.015	11.04	0.013	10.97	0.013	11.17	0.013	17.23	0.053	≦ 19.21
		134	5670	11.14	0.013	10.96	0.012	10.76	0.012	10.80	0.012	16.94	0.049	≦ 19.21
		151	5755	12.75	0.019	12.71	0.019	13.62	0.023	13.07	0.020	19.07	0.081	≦ 25.31
		159	5795	13.31	0.021	12.72	0.019	13.66	0.023	13.25	0.021	**19.27**	**0.085**	≦ 25.31

操作模式	Data Rate (Mbps)	頻道 CH	頻率 MHz	最大傳導輸出功率(Average)										Limit (dBm)
				ANT-0		ANT-1		ANT-2		ANT-3		ANT-0+1+2+3		
				dBm	W	dBm	W	dBm	W	dBm	W	dBm	W	
Mode 13	26	36	5180	11.77	0.015	12.11	0.016	12.09	0.016	12.05	0.016	18.03	0.064	≦ 25.35
		40	5200	12.95	0.020	13.11	0.020	12.87	0.019	13.15	0.021	19.04	0.080	≦ 25.35
		44	5220	12.79	0.019	13.09	0.020	12.80	0.019	13.06	0.020	18.96	0.079	≦ 25.35
		48	5240	13.06	0.020	13.20	0.021	13.03	0.020	13.29	0.021	**19.17**	**0.083**	≦ 25.35
		52	5260	10.16	0.010	9.78	0.010	9.58	0.009	9.79	0.010	15.85	0.038	≦ 19.35
		56	5280	10.43	0.011	9.84	0.010	10.09	0.010	10.27	0.011	16.18	0.041	≦ 19.35
		60	5300	10.41	0.011	9.64	0.009	9.73	0.009	10.20	0.010	16.03	0.040	≦ 19.35
		64	5320	10.38	0.011	9.59	0.009	9.99	0.010	10.19	0.010	16.07	0.040	≦ 19.35
		100	5500	9.36	0.009	8.99	0.008	9.08	0.008	9.15	0.008	15.17	0.033	≦ 19.21
		104	5520	9.66	0.009	8.81	0.008	8.98	0.008	9.07	0.008	15.16	0.033	≦ 19.21
		108	5540	9.64	0.009	8.74	0.007	9.06	0.008	9.10	0.008	15.17	0.033	≦ 19.21
		112	5560	9.81	0.010	8.86	0.008	9.26	0.008	9.14	0.008	15.30	0.034	≦ 19.21
		116	5580	9.76	0.009	8.76	0.008	9.08	0.008	9.09	0.008	15.21	0.033	≦ 19.21
		132	5660	9.66	0.009	8.83	0.008	9.19	0.008	9.05	0.008	15.21	0.033	≦ 19.21
		136	5680	9.56	0.009	8.78	0.008	9.16	0.008	9.04	0.008	15.16	0.033	≦ 19.21
		140	5700	9.72	0.009	9.06	0.008	9.36	0.009	9.35	0.009	15.40	0.035	≦ 19.21
		149	5745	12.67	0.018	12.68	0.019	13.24	0.021	13.08	0.020	18.95	0.079	≦ 25.31
		153	5765	12.61	0.018	12.68	0.019	13.19	0.021	13.12	0.021	18.93	0.078	≦ 25.31
		157	5785	12.78	0.019	12.65	0.018	13.14	0.021	13.12	0.021	18.95	0.079	≦ 25.31
		161	5805	12.80	0.019	12.53	0.018	12.99	0.020	13.04	0.020	18.87	0.077	≦ 25.31
		165	5825	13.37	0.022	12.75	0.019	13.46	0.022	13.25	0.021	**19.24**	**0.084**	≦ 25.31
Mode 14	54	38	5190	10.22	0.011	10.50	0.011	10.11	0.010	10.24	0.011	16.29	0.043	≦ 25.35
		46	5230	13.26	0.021	13.39	0.022	13.17	0.021	13.39	0.022	**19.32**	**0.086**	≦ 25.35
		54	5270	11.75	0.015	11.25	0.013	11.47	0.014	11.60	0.014	17.54	0.057	≦ 19.35
		62	5310	10.35	0.011	9.79	0.010	10.07	0.010	10.17	0.010	16.12	0.041	≦ 19.35
		102	5510	11.16	0.013	10.66	0.012	10.82	0.012	10.94	0.012	16.92	0.049	≦ 19.21
		110	5550	11.73	0.015	11.18	0.013	11.06	0.013	11.27	0.013	17.34	0.054	≦ 19.21
		134	5670	11.28	0.013	11.02	0.013	10.88	0.012	10.86	0.012	17.03	0.051	≦ 19.21
		151	5755	12.80	0.019	12.73	0.019	13.64	0.023	13.18	0.021	19.12	0.082	≦ 25.31
		159	5795	13.33	0.022	12.81	0.019	13.77	0.024	13.30	0.021	**19.34**	**0.086**	≦ 25.31
Mode 15	117.2	42	5210	10.05	0.010	10.03	0.010	10.11	0.010	10.00	0.010	**16.07**	**0.040**	≦ 25.35
		58	5290	10.16	0.010	9.93	0.010	10.12	0.010	10.28	0.011	16.14	0.041	≦ 19.35
		106	5530	10.32	0.011	9.59	0.009	9.68	0.009	9.82	0.010	15.88	0.039	≦ 19.21
		155	5775	12.78	0.019	12.61	0.018	13.58	0.023	13.26	0.021	**19.10**	**0.081**	≦ 25.31

操作模式	Data Rate (Mbps)	頻道 CH	頻率 MHz	最大傳導輸出功率(Average)										Limit (dBm)
				ANT-0		ANT-1		ANT-2		ANT-3		ANT-0+1+2+3		
				dBm	W	dBm	W	dBm	W	dBm	W	dBm	W	
Mode 16	MCS0	36	5180	11.85	0.015	12.18	0.017	11.96	0.016	12.05	0.016	18.03	0.064	≦ 25.35
		40	5200	13.35	0.022	13.47	0.022	13.16	0.021	13.28	0.021	19.34	0.086	≦ 25.35
		44	5220	13.30	0.021	13.34	0.022	13.23	0.021	13.26	0.021	19.30	0.085	≦ 25.35
		48	5240	13.47	0.022	13.64	0.023	13.26	0.021	13.38	0.022	**19.46**	**0.088**	≦ 25.35
		52	5260	10.59	0.011	9.87	0.010	9.81	0.010	10.07	0.010	16.12	0.041	≦ 19.35
		56	5280	10.93	0.012	9.97	0.010	10.41	0.011	10.68	0.012	16.53	0.045	≦ 19.35
		60	5300	10.36	0.011	9.93	0.010	10.14	0.010	10.25	0.011	16.19	0.042	≦ 19.35
		64	5320	10.16	0.010	9.37	0.009	9.76	0.009	10.10	0.010	15.88	0.039	≦ 19.35
		100	5500	9.93	0.010	9.39	0.009	9.46	0.009	9.42	0.009	15.58	0.036	≦ 19.21
		104	5520	9.36	0.009	8.32	0.007	8.89	0.008	8.84	0.008	14.89	0.031	≦ 19.21
		108	5540	9.39	0.009	8.36	0.007	8.99	0.008	8.87	0.008	14.94	0.031	≦ 19.21
		112	5560	9.66	0.009	8.37	0.007	9.06	0.008	8.97	0.008	15.06	0.032	≦ 19.21
		116	5580	9.55	0.009	8.31	0.007	8.95	0.008	8.88	0.008	14.97	0.031	≦ 19.21
		132	5660	8.74	0.007	8.29	0.007	8.80	0.008	8.75	0.007	14.67	0.029	≦ 19.21
		136	5680	8.90	0.008	8.25	0.007	8.78	0.008	8.92	0.008	14.74	0.030	≦ 19.21
		140	5700	8.93	0.008	8.36	0.007	8.82	0.008	9.06	0.008	14.82	0.030	≦ 19.21
		149	5745	13.05	0.020	12.64	0.018	13.50	0.022	13.23	0.021	19.14	0.082	≦ 25.31
		153	5765	13.03	0.020	12.65	0.018	13.47	0.022	13.39	0.022	19.17	0.083	≦ 25.31
		157	5785	13.00	0.020	12.71	0.019	13.68	0.023	13.27	0.021	19.20	0.083	≦ 25.31
		161	5805	13.00	0.020	12.81	0.019	13.63	0.023	13.26	0.021	19.21	0.083	≦ 25.31
		165	5825	13.63	0.023	12.97	0.020	13.53	0.023	13.48	0.022	**19.43**	**0.088**	≦ 25.31
Mode 17	MCS0	38	5190	10.48	0.011	10.53	0.011	10.23	0.011	10.47	0.011	16.45	0.044	≦ 25.35
		46	5230	13.12	0.021	13.69	0.023	13.28	0.021	13.51	0.022	**19.43**	**0.088**	≦ 25.35
		54	5270	11.80	0.015	11.27	0.013	11.59	0.014	11.74	0.015	17.63	0.058	≦ 19.35
		62	5310	10.38	0.011	9.97	0.010	10.12	0.010	10.17	0.010	16.18	0.041	≦ 19.35
		102	5510	11.42	0.014	10.88	0.012	11.21	0.013	11.16	0.013	17.19	0.052	≦ 19.21
		110	5550	11.86	0.015	11.29	0.013	11.36	0.014	11.42	0.014	17.51	0.056	≦ 19.21
		134	5670	11.45	0.014	11.12	0.013	11.06	0.013	10.97	0.013	17.17	0.052	≦ 19.21
		151	5755	12.82	0.019	12.96	0.020	13.87	0.024	13.48	0.022	19.32	0.086	≦ 25.31
		159	5795	13.23	0.021	12.87	0.019	13.76	0.024	13.62	0.023	**19.40**	**0.087**	≦ 25.31
Mode 18	MCS0	42	5210	9.60	0.009	9.67	0.009	9.63	0.009	9.81	0.010	**15.70**	**0.037**	≦ 25.35
		58	5290	10.38	0.011	10.19	0.010	10.57	0.011	10.47	0.011	16.43	0.044	≦ 19.35
		106	5530	10.61	0.012	9.98	0.010	10.03	0.010	10.07	0.010	16.20	0.042	≦ 19.21
		155	5775	13.21	0.021	12.87	0.019	13.87	0.024	13.39	0.022	**19.37**	**0.086**	≦ 25.31

Maximum Power Spectral Density

ANT-0						
操作模式	頻道 (CH)	頻率 (MHz)	量測值 (dBm/MHz)	Duty Factor (dB)	轉換值 (dBm/MHz)	限制值 (dBm/MHz)
Mode 10	36	5180	5.186	0.221	5.407	≤ 12.35
	40	5200	5.079	0.221	5.300	≤ 12.35
	48	5240	5.554	0.221	5.775	≤ 12.35
	52	5260	0.196	0.221	0.417	≤ 6.35
	56	5280	0.279	0.221	0.500	≤ 6.35
	64	5320	0.151	0.221	0.372	≤ 6.35
	100	5500	0.199	0.221	0.420	≤ 6.21
	112	5560	0.154	0.221	0.375	≤ 6.21
	140	5700	-0.026	0.221	0.195	≤ 6.21
Mode 13	36	5180	6.764	0.168	6.932	≤ 17.00
	40	5200	7.377	0.168	7.545	≤ 17.00
	48	5240	7.464	0.168	7.632	≤ 17.00
	52	5260	4.692	0.168	4.860	≤ 11.00
	56	5280	4.893	0.168	5.061	≤ 11.00
	64	5320	4.866	0.168	5.034	≤ 11.00
	100	5500	4.611	0.168	4.779	≤ 11.00
	112	5560	5.016	0.168	5.184	≤ 11.00
	140	5700	4.780	0.168	4.948	≤ 11.00
Mode 14	38	5190	2.093	0.232	2.325	≤ 17.00
	46	5230	5.103	0.232	5.335	≤ 17.00
	54	5270	3.637	0.232	3.869	≤ 11.00
	62	5310	1.737	0.232	1.969	≤ 11.00
	102	5510	3.550	0.232	3.782	≤ 11.00
	110	5550	4.157	0.232	4.389	≤ 11.00
	134	5670	4.175	0.232	4.407	≤ 11.00
Mode 15	42	5210	-0.580	0.244	-0.336	≤ 17.00
	58	5290	-0.929	0.244	-0.685	≤ 11.00
	106	5530	-0.443	0.244	-0.199	≤ 11.00

ANT-0						
操作模式	頻道 (CH)	頻率 (MHz)	量測值 (dBm/MHz)	Duty Factor (dB)	轉換值 (dBm/MHz)	限制值 (dBm/MHz)
Mode 16	36	5180	6.163	0.125	6.288	≤ 17.00
	40	5200	7.465	0.125	7.590	≤ 17.00
	48	5240	7.623	0.125	7.748	≤ 17.00
	52	5260	4.707	0.125	4.832	≤ 11.00
	56	5280	4.940	0.125	5.065	≤ 11.00
	64	5320	4.848	0.125	4.973	≤ 11.00
	100	5500	4.755	0.125	4.880	≤ 11.00
	112	5560	4.741	0.125	4.866	≤ 11.00
	140	5700	4.792	0.125	4.917	≤ 11.00
Mode 17	38	5190	2.601	0.185	2.786	≤ 17.00
	46	5230	4.764	0.185	4.949	≤ 17.00
	54	5270	3.596	0.185	3.781	≤ 11.00
	62	5310	2.089	0.185	2.274	≤ 11.00
	102	5510	3.576	0.185	3.761	≤ 11.00
	110	5550	4.306	0.185	4.491	≤ 11.00
	134	5670	4.253	0.185	4.438	≤ 11.00
Mode 18	42	5210	-0.116	0.217	0.101	≤ 17.00
	58	5290	-0.651	0.217	-0.434	≤ 11.00
	106	5530	0.034	0.217	0.251	≤ 11.00

Note: Power Density = measured result + 10 log (1/duty cycle) + Conversion ratio = measured result + duty factory.

ANT-0						
操作模式	頻道 (CH)	頻率 (MHz)	量測值 (dBm/100 kHz)	Duty Factor (dB)	轉換值 (dBm/500 kHz)	限制值 (dBm/500 kHz)
Mode 10	149	5745	-0.698	0.221	6.513	≤ 25.31
	157	5785	-0.701	0.221	6.510	≤ 25.31
	165	5825	-0.993	0.221	6.218	≤ 25.31
Mode 13	149	5745	-1.944	0.168	5.213	≤ 30.00
	157	5785	-1.245	0.168	5.912	≤ 30.00
	165	5825	-1.157	0.168	6.000	≤ 30.00
Mode 14	151	5755	-3.885	0.232	3.337	≤ 30.00
	159	5795	-4.054	0.232	3.168	≤ 30.00
Mode 15	155	5775	-7.130	0.244	0.103	≤ 30.00
Mode 16	149	5745	-1.905	0.125	5.209	≤ 30.00
	157	5785	-2.075	0.125	5.039	≤ 30.00
	165	5825	-2.229	0.125	4.885	≤ 30.00
Mode 17	151	5755	-4.553	0.185	2.622	≤ 30.00
	159	5795	-4.850	0.185	2.325	≤ 30.00
Mode 18	155	5775	-8.017	0.217	-0.810	≤ 30.00

Note: Power Density = measured result + 10 log (1/duty cycle) + Conversion ratio = measured result + duty factory.
Conversion ration = 10*Log(500 kHz/100 kHz)

ANT-1						
操作模式	頻道 (CH)	頻率 (MHz)	量測值 (dBm/MHz)	Duty Factor (dB)	轉換值 (dBm/MHz)	限制值 (dBm/MHz)
Mode 10	36	5180	5.277	0.221	5.498	≤ 12.35
	40	5200	5.267	0.221	5.488	≤ 12.35
	48	5240	5.571	0.221	5.792	≤ 12.35
	52	5260	-0.339	0.221	-0.118	≤ 6.35
	56	5280	-0.393	0.221	-0.172	≤ 6.35
	64	5320	-0.524	0.221	-0.303	≤ 6.35
	100	5500	-0.349	0.221	-0.128	≤ 6.21
	112	5560	-0.413	0.221	-0.192	≤ 6.21
	140	5700	-0.459	0.221	-0.238	≤ 6.21
Mode 13	36	5180	6.908	0.168	7.076	≤ 17.00
	40	5200	7.233	0.168	7.401	≤ 17.00
	48	5240	7.687	0.168	7.855	≤ 17.00
	52	5260	4.461	0.168	4.629	≤ 11.00
	56	5280	4.420	0.168	4.588	≤ 11.00
	64	5320	4.640	0.168	4.808	≤ 11.00
	100	5500	4.415	0.168	4.583	≤ 11.00
	112	5560	4.200	0.168	4.368	≤ 11.00
	140	5700	4.274	0.168	4.442	≤ 11.00
Mode 14	38	5190	2.995	0.232	3.227	≤ 17.00
	46	5230	4.931	0.232	5.163	≤ 17.00
	54	5270	2.967	0.232	3.199	≤ 11.00
	62	5310	1.644	0.232	1.876	≤ 11.00
	102	5510	3.216	0.232	3.448	≤ 11.00
	110	5550	3.141	0.232	3.373	≤ 11.00
	134	5670	3.317	0.232	3.549	≤ 11.00
Mode 15	42	5210	-0.397	0.244	-0.153	≤ 17.00
	58	5290	-1.493	0.244	-1.249	≤ 11.00
	106	5530	-1.560	0.244	-1.316	≤ 11.00

Note: Power Density = measured result + 10 log (1/duty cycle) + Conversion ratio = measured result + duty factory.

ANT-1						
操作模式	頻道 (CH)	頻率 (MHz)	量測值 (dBm/MHz)	Duty Factor (dB)	轉換值 (dBm/MHz)	限制值 (dBm/MHz)
Mode 16	36	5180	6.387	0.125	6.512	≤ 17.00
	40	5200	7.331	0.125	7.456	≤ 17.00
	48	5240	7.585	0.125	7.710	≤ 17.00
	52	5260	4.159	0.125	4.284	≤ 11.00
	56	5280	4.291	0.125	4.416	≤ 11.00
	64	5320	4.182	0.125	4.307	≤ 11.00
	100	5500	4.221	0.125	4.346	≤ 11.00
	112	5560	4.243	0.125	4.368	≤ 11.00
	140	5700	4.346	0.125	4.471	≤ 11.00
Mode 17	38	5190	2.511	0.185	2.696	≤ 17.00
	46	5230	5.310	0.185	5.495	≤ 17.00
	54	5270	3.039	0.185	3.224	≤ 11.00
	62	5310	1.534	0.185	1.719	≤ 11.00
	102	5510	3.121	0.185	3.306	≤ 11.00
	110	5550	3.341	0.185	3.526	≤ 11.00
	134	5670	3.355	0.185	3.540	≤ 11.00
Mode 18	42	5210	-0.733	0.217	-0.516	≤ 17.00
	58	5290	-0.923	0.217	-0.706	≤ 11.00
	106	5530	-0.480	0.217	-0.263	≤ 11.00

Note: Power Density = measured result + 10 log (1/duty cycle) + Conversion ratio = measured result + duty factory.

ANT-1						
操作模式	頻道 (CH)	頻率 (MHz)	量測值 (dBm/100 kHz)	Duty Factor (dB)	轉換值 (dBm/500 kHz)	限制值 (dBm/500 kHz)
Mode 10	149	5745	-0.493	0.221	6.718	≤ 25.31
	157	5785	-0.611	0.221	6.600	≤ 25.31
	165	5825	-0.862	0.221	6.349	≤ 25.31
Mode 13	149	5745	-0.950	0.168	6.207	≤ 30.00
	157	5785	-1.316	0.168	5.841	≤ 30.00
	165	5825	-1.296	0.168	5.861	≤ 30.00
Mode 14	151	5755	-3.669	0.232	3.553	≤ 30.00
	159	5795	-4.174	0.232	3.048	≤ 30.00
Mode 15	155	5775	-7.261	0.244	-0.028	≤ 30.00
Mode 16	149	5745	-1.972	0.125	5.142	≤ 30.00
	157	5785	-1.892	0.125	5.222	≤ 30.00
	165	5825	-2.655	0.125	4.459	≤ 30.00
Mode 17	151	5755	-4.191	0.185	2.984	≤ 30.00
	159	5795	-4.866	0.185	2.309	≤ 30.00
Mode 18	155	5775	-7.813	0.217	-0.606	≤ 30.00

Note: Power Density = measured result + 10 log (1/duty cycle) + Conversion ratio = measured result + duty factory.
Conversion ration = 10*Log(500 kHz/100 kHz)

ANT-2						
操作模式	頻道 (CH)	頻率 (MHz)	量測值 (dBm/MHz)	Duty Factor (dB)	轉換值 (dBm/MHz)	限制值 (dBm/MHz)
Mode 10	36	5180	5.554	0.221	5.775	≤ 12.35
	40	5200	5.061	0.221	5.282	≤ 12.35
	48	5240	5.114	0.221	5.335	≤ 12.35
	52	5260	-0.443	0.221	-0.222	≤ 6.35
	56	5280	-0.127	0.221	0.094	≤ 6.35
	64	5320	-0.378	0.221	-0.157	≤ 6.35
	100	5500	-0.498	0.221	-0.277	≤ 6.21
	112	5560	-0.581	0.221	-0.360	≤ 6.21
	140	5700	-0.279	0.221	-0.058	≤ 6.21
Mode 13	36	5180	7.287	0.168	7.455	≤ 17.00
	40	5200	7.483	0.168	7.651	≤ 17.00
	48	5240	7.304	0.168	7.472	≤ 17.00
	52	5260	4.305	0.168	4.473	≤ 11.00
	56	5280	4.331	0.168	4.499	≤ 11.00
	64	5320	4.471	0.168	4.639	≤ 11.00
	100	5500	4.173	0.168	4.341	≤ 11.00
	112	5560	4.253	0.168	4.421	≤ 11.00
	140	5700	4.619	0.168	4.787	≤ 11.00
Mode 14	38	5190	2.383	0.232	2.615	≤ 17.00
	46	5230	5.010	0.232	5.242	≤ 17.00
	54	5270	3.239	0.232	3.471	≤ 11.00
	62	5310	1.914	0.232	2.146	≤ 11.00
	102	5510	2.943	0.232	3.175	≤ 11.00
	110	5550	3.460	0.232	3.692	≤ 11.00
	134	5670	3.724	0.232	3.956	≤ 11.00
Mode 15	42	5210	-0.805	0.244	-0.561	≤ 17.00
	58	5290	-0.992	0.244	-0.748	≤ 11.00
	106	5530	-1.352	0.244	-1.108	≤ 11.00

Note: Power Density = measured result + 10 log (1/duty cycle) + Conversion ratio = measured result + duty factory.

ANT-2						
操作模式	頻道 (CH)	頻率 (MHz)	量測值 (dBm/MHz)	Duty Factor (dB)	轉換值 (dBm/MHz)	限制值 (dBm/MHz)
Mode 16	36	5180	6.979	0.125	7.104	≤ 17.00
	40	5200	7.777	0.125	7.902	≤ 17.00
	48	5240	7.522	0.125	7.647	≤ 17.00
	52	5260	4.448	0.125	4.573	≤ 11.00
	56	5280	4.532	0.125	4.657	≤ 11.00
	64	5320	4.237	0.125	4.362	≤ 11.00
	100	5500	4.240	0.125	4.365	≤ 11.00
	112	5560	4.342	0.125	4.467	≤ 11.00
	140	5700	4.560	0.125	4.685	≤ 11.00
Mode 17	38	5190	2.868	0.185	3.053	≤ 17.00
	46	5230	5.246	0.185	5.431	≤ 17.00
	54	5270	3.150	0.185	3.335	≤ 11.00
	62	5310	1.999	0.185	2.184	≤ 11.00
	102	5510	2.985	0.185	3.170	≤ 11.00
	110	5550	3.728	0.185	3.913	≤ 11.00
	134	5670	3.949	0.185	4.134	≤ 11.00
Mode 18	42	5210	-1.101	0.217	-0.884	≤ 17.00
	58	5290	-0.757	0.217	-0.540	≤ 11.00
	106	5530	-0.878	0.217	-0.661	≤ 11.00

Note: Power Density = measured result + 10 log (1/duty cycle) + Conversion ratio = measured result + duty factory.

ANT-2						
操作模式	頻道 (CH)	頻率 (MHz)	量測值 (dBm/100 kHz)	Duty Factor (dB)	轉換值 (dBm/500 kHz)	限制值 (dBm/500 kHz)
Mode 10	149	5745	-0.018	0.221	7.193	≤ 25.31
	157	5785	-0.205	0.221	7.006	≤ 25.31
	165	5825	-0.529	0.221	6.682	≤ 25.31
Mode 13	149	5745	-0.509	0.168	6.648	≤ 30.00
	157	5785	-0.417	0.168	6.740	≤ 30.00
	165	5825	-1.014	0.168	6.143	≤ 30.00
Mode 14	151	5755	-3.035	0.232	4.187	≤ 30.00
	159	5795	-3.092	0.232	4.130	≤ 30.00
Mode 15	155	5775	-6.440	0.244	0.793	≤ 30.00
Mode 16	149	5745	-1.211	0.125	5.903	≤ 30.00
	157	5785	-1.276	0.125	5.838	≤ 30.00
	165	5825	-1.742	0.125	5.372	≤ 30.00
Mode 17	151	5755	-3.225	0.185	3.950	≤ 30.00
	159	5795	-3.609	0.185	3.566	≤ 30.00
Mode 18	155	5775	-6.983	0.217	0.224	≤ 30.00

Note: Power Density = measured result + 10 log (1/duty cycle) + Conversion ratio = measured result + duty factory.
Conversion ration = 10*Log(500 kHz/100 kHz)

ANT-3						
操作模式	頻道 (CH)	頻率 (MHz)	量測值 (dBm/MHz)	Duty Factor (dB)	轉換值 (dBm/MHz)	限制值 (dBm/MHz)
Mode 10	36	5180	5.613	0.221	5.834	≤ 12.35
	40	5200	5.794	0.221	6.015	≤ 12.35
	48	5240	5.456	0.221	5.677	≤ 12.35
	52	5260	-0.309	0.221	-0.088	≤ 6.35
	56	5280	-0.162	0.221	0.059	≤ 6.35
	64	320	-0.375	0.221	-0.154	≤ 6.35
	100	5500	-0.441	0.221	-0.220	≤ 6.21
	112	5560	-0.602	0.221	-0.381	≤ 6.21
	140	5700	0.065	0.221	0.286	≤ 6.21
Mode 13	36	5180	7.513	0.168	7.681	≤ 17.00
	40	5200	7.782	0.168	7.950	≤ 17.00
	48	5240	7.548	0.168	7.716	≤ 17.00
	52	5260	4.354	0.168	4.522	≤ 11.00
	56	5280	4.432	0.168	4.600	≤ 11.00
	64	5320	4.518	0.168	4.686	≤ 11.00
	100	5500	4.328	0.168	4.496	≤ 11.00
	112	5560	4.408	0.168	4.576	≤ 11.00
	140	5700	4.653	0.168	4.821	≤ 11.00
Mode 14	38	5190	3.003	0.232	3.235	≤ 17.00
	46	5230	5.305	0.232	5.537	≤ 17.00
	54	5270	3.442	0.232	3.674	≤ 11.00
	62	5310	1.428	0.232	1.660	≤ 11.00
	102	5510	3.045	0.232	3.277	≤ 11.00
	110	5550	3.433	0.232	3.665	≤ 11.00
	134	5670	3.771	0.232	4.003	≤ 11.00
Mode 15	42	5210	-0.488	0.244	-0.244	≤ 17.00
	58	5290	-1.351	0.244	-1.107	≤ 11.00
	106	5530	-1.270	0.244	-1.026	≤ 11.00

Note: Power Density = measured result + 10 log (1/duty cycle) + Conversion ratio = measured result + duty factory.

ANT-3						
操作模式	頻道 (CH)	頻率 (MHz)	量測值 (dBm/MHz)	Duty Factor (dB)	轉換值 (dBm/MHz)	限制值 (dBm/MHz)
Mode 16	36	5180	7.141	0.125	7.266	≤ 17.00
	40	5200	7.876	0.125	8.001	≤ 17.00
	48	5240	7.436	0.125	7.561	≤ 17.00
	52	5260	4.528	0.125	4.653	≤ 11.00
	56	5280	4.471	0.125	4.596	≤ 11.00
	64	5320	4.453	0.125	4.578	≤ 11.00
	100	5500	4.357	0.125	4.482	≤ 11.00
	112	5560	4.325	0.125	4.450	≤ 11.00
	140	5700	4.528	0.125	4.653	≤ 11.00
Mode 17	38	5190	2.865	0.185	3.050	≤ 17.00
	46	5230	5.491	0.185	5.676	≤ 17.00
	54	5270	3.294	0.185	3.479	≤ 11.00
	62	5310	1.882	0.185	2.067	≤ 11.00
	102	5510	3.181	0.185	3.366	≤ 11.00
	110	5550	3.579	0.185	3.764	≤ 11.00
	134	5670	3.801	0.185	3.986	≤ 11.00
Mode 18	42	5210	-0.396	0.217	-0.179	≤ 17.00
	58	5290	-0.861	0.217	-0.644	≤ 11.00
	106	5530	-0.633	0.217	-0.416	≤ 11.00

Note: Power Density = measured result + 10 log (1/duty cycle) + Conversion ratio = measured result + duty factory.

ANT-3						
操作模式	頻道 (CH)	頻率 (MHz)	量測值 (dBm/100 kHz)	Duty Factor (dB)	轉換值 (dBm/500 kHz)	限制值 (dBm/500 kHz)
Mode 10	149	5745	-0.625	0.221	6.586	≤ 25.31
	157	5785	-0.786	0.221	6.425	≤ 25.31
	165	5825	-0.427	0.221	6.784	≤ 25.31
Mode 13	149	5745	-0.978	0.168	6.179	≤ 30.00
	157	5785	-1.033	0.168	6.124	≤ 30.00
	165	5825	-0.532	0.168	6.625	≤ 30.00
Mode 14	151	5755	-3.343	0.232	3.879	≤ 30.00
	159	5795	-3.689	0.232	3.533	≤ 30.00
Mode 15	155	5775	-7.259	0.244	-0.026	≤ 30.00
Mode 16	149	5745	-1.710	0.125	5.404	≤ 30.00
	157	5785	-1.789	0.125	5.325	≤ 30.00
	165	5825	-1.891	0.125	5.223	≤ 30.00
Mode 17	151	5755	-4.475	0.185	2.700	≤ 30.00
	159	5795	-4.462	0.185	2.713	≤ 30.00
Mode 18	155	5775	-7.615	0.217	-0.408	≤ 30.00

Note: Power Density = measured result + 10 log (1/duty cycle) + Conversion ratio = measured result + duty factory.
Conversion ration = 10*Log(500 kHz/100 kHz)

ANT-0+1+2+3				
操作模式	頻道 (CH)	頻率 (MHz)	轉換值(dBm/MHz)	限制值 (dBm/MHz)
Mode 10	36	5180	11.653	≤ 12.35
	40	5200	11.552	≤ 12.35
	48	5240	11.669	≤ 12.35
	52	5260	6.025	≤ 6.35
	56	5280	6.148	≤ 6.35
	64	5320	5.968	≤ 6.35
	100	5500	5.978	≤ 6.21
	112	5560	5.892	≤ 6.21
	140	5700	6.072	≤ 6.21
Mode 13	36	5180	13.316	≤ 17.00
	40	5200	13.662	≤ 17.00
	48	5240	13.691	≤ 17.00
	52	5260	10.644	≤ 11.00
	56	5280	10.713	≤ 11.00
	64	5320	10.815	≤ 11.00
	100	5500	10.573	≤ 11.00
	112	5560	10.670	≤ 11.00
	140	5700	10.774	≤ 11.00
Mode 14	38	5190	8.889	≤ 17.00
	46	5230	11.342	≤ 17.00
	54	5270	9.581	≤ 11.00
	62	5310	7.937	≤ 11.00
	102	5510	9.448	≤ 11.00
	110	5550	9.817	≤ 11.00
	134	5670	10.010	≤ 11.00
Mode 15	42	5210	5.699	≤ 17.00
	58	5290	5.079	≤ 11.00
	106	5530	5.129	≤ 11.00

Note: Power Density = measured result + 10 log (1/duty cycle) + Conversion ratio = measured result + duty factory.

ANT-0+1+2+3				
操作模式	頻道 (CH)	頻率 (MHz)	轉換值(dBm/MHz)	限制值 (dBm/MHz)
Mode 16	36	5180	12.831	≤ 17.00
	40	5200	13.763	≤ 17.00
	48	5240	13.687	≤ 17.00
	52	5260	10.610	≤ 11.00
	56	5280	10.710	≤ 11.00
	64	5320	10.583	≤ 11.00
	100	5500	10.544	≤ 11.00
	112	5560	10.562	≤ 11.00
	140	5700	10.705	≤ 11.00
Mode 17	38	5190	8.920	≤ 17.00
	46	5230	11.417	≤ 17.00
	54	5270	9.481	≤ 11.00
	62	5310	8.087	≤ 11.00
	102	5510	9.427	≤ 11.00
	110	5550	9.959	≤ 11.00
	134	5670	10.058	≤ 11.00
Mode 18	42	5210	5.667	≤ 17.00
	58	5290	5.441	≤ 11.00
	106	5530	5.762	≤ 11.00

Note: Power Density = measured result + 10 log (1/duty cycle) + Conversion ratio = measured result + duty factory.

ANT-0+1+2+3				
操作模式	頻道 (CH)	頻率 (MHz)	轉換值(dBm/500 kHz)	限制值 (dBm/500 kHz)
Mode 10	149	5745	12.781	≤ 25.31
	157	5785	12.661	≤ 25.31
	165	5825	12.535	≤ 25.31
Mode 13	149	5745	12.113	≤ 30.00
	157	5785	12.190	≤ 30.00
	165	5825	12.188	≤ 30.00
Mode 14	151	5755	9.772	≤ 30.00
	159	5795	9.511	≤ 30.00
Mode 15	155	5775	6.245	≤ 30.00
Mode 16	149	5745	11.446	≤ 30.00
	157	5785	11.387	≤ 30.00
	165	5825	11.020	≤ 30.00
Mode 17	151	5755	9.118	≤ 30.00
	159	5795	8.780	≤ 30.00
Mode 18	155	5775	5.638	≤ 30.00

Note: Power Density = measured result + 10 log (1/duty cycle) + Conversion ratio = measured result + duty factory.
Conversion ration = 10*Log(500 kHz/100 kHz)

Beamforming on

ANT-0						
操作模式	頻道 (CH)	頻率 (MHz)	量測值 (dBm/MHz)	Duty Factor (dB)	轉換值 (dBm/MHz)	限制值 (dBm/MHz)
Mode 13	36	5180	0.840	0.168	1.008	≤ 12.35
	40	5200	1.407	0.168	1.575	≤ 12.35
	48	5240	1.410	0.168	1.578	≤ 12.35
	52	5260	-1.653	0.168	-1.485	≤ 6.35
	56	5280	-1.780	0.168	-1.612	≤ 6.35
	64	5320	-1.485	0.168	-1.317	≤ 6.35
	100	5500	-1.691	0.168	-1.523	≤ 6.21
	112	5560	-1.201	0.168	-1.033	≤ 6.21
	140	5700	-1.394	0.168	-1.226	≤ 6.21
Mode 14	38	5190	-4.085	0.232	-3.853	≤ 12.35
	46	5230	-1.275	0.232	-1.043	≤ 12.35
	54	5270	-3.309	0.232	-3.077	≤ 6.35
	62	5310	-4.589	0.232	-4.357	≤ 6.35
	102	5510	-3.101	0.232	-2.869	≤ 6.21
	110	5550	-2.412	0.232	-2.180	≤ 6.21
	134	5670	-2.420	0.232	-2.188	≤ 6.21
Mode 15	42	5210	-7.256	0.244	-7.012	≤ 12.35
	58	5290	-7.116	0.244	-6.872	≤ 6.35
	106	5530	-6.877	0.244	-6.633	≤ 6.21
Mode 16	36	5180	0.088	0.125	0.213	≤ 12.35
	40	5200	1.815	0.125	1.940	≤ 12.35
	48	5240	1.831	0.125	1.956	≤ 12.35
	52	5260	-1.809	0.125	-1.684	≤ 6.35
	56	5280	-1.342	0.125	-1.217	≤ 6.35
	64	5320	-1.846	0.125	-1.721	≤ 6.35
	100	5500	-1.973	0.125	-1.848	≤ 6.21
	112	5560	-1.954	0.125	-1.829	≤ 6.21
	140	5700	-2.361	0.125	-2.236	≤ 6.21
Mode 17	38	5190	-3.978	0.185	-3.793	≤ 12.35
	46	5230	-1.062	0.185	-0.877	≤ 12.35
	54	5270	-3.046	0.185	-2.861	≤ 6.35
	62	5310	-4.319	0.185	-4.134	≤ 6.35
	102	5510	-2.859	0.185	-2.674	≤ 6.21
	110	5550	-2.051	0.185	-1.866	≤ 6.21
	134	5670	-2.189	0.185	-2.004	≤ 6.21
Mode 18	42	5210	-7.544	0.217	-7.327	≤ 12.35
	58	5290	-7.092	0.217	-6.875	≤ 6.35
	106	5530	-6.625	0.217	-6.408	≤ 6.21

Note: Power Density = measured result + 10 log (1/duty cycle) + Conversion ratio = measured result + duty factory.

ANT-0						
操作模式	頻道 (CH)	頻率 (MHz)	量測值 (dBm/100 kHz)	Duty Factor (dB)	轉換值 (dBm/500 kHz)	限制值 (dBm/500 kHz)
Mode 13	149	5745	-7.979	0.168	-0.822	≤ 25.31
	157	5785	-8.163	0.168	-1.006	≤ 25.31
	165	5825	-7.871	0.168	-0.714	≤ 25.31
Mode 14	151	5755	-10.856	0.232	-3.634	≤ 25.31
	159	5795	-10.924	0.232	-3.702	≤ 25.31
Mode 15	155	5775	-14.035	0.244	-6.802	≤ 25.31
Mode 16	149	5745	-8.736	0.125	-1.622	≤ 25.31
	157	5785	-8.782	0.125	-1.668	≤ 25.31
	165	5825	-8.691	0.125	-1.577	≤ 25.31
Mode 17	151	5755	-11.727	0.185	-4.552	≤ 25.31
	159	5795	-11.553	0.185	-4.378	≤ 25.31
Mode 18	155	5775	-14.694	0.217	-7.487	≤ 25.31

Note: Power Density = measured result + 10 log (1/duty cycle) + Conversion ratio = measured result + duty factory.
Conversion ration = 10*Log(500 kHz/100 kHz)

ANT-1						
操作模式	頻道 (CH)	頻率 (MHz)	量測值 (dBm/MHz)	Duty Factor (dB)	轉換值 (dBm/MHz)	限制值 (dBm/MHz)
Mode 13	36	5180	0.811	0.168	0.979	≤ 12.35
	40	5200	1.092	0.168	1.260	≤ 12.35
	48	5240	1.407	0.168	1.575	≤ 12.35
	52	5260	-1.852	0.168	-1.684	≤ 6.35
	56	5280	-2.148	0.168	-1.980	≤ 6.35
	64	5320	-1.978	0.168	-1.810	≤ 6.35
	100	5500	-2.425	0.168	-2.257	≤ 6.21
	112	5560	-2.335	0.168	-2.167	≤ 6.21
	140	5700	-1.613	0.168	-1.445	≤ 6.21
Mode 14	38	5190	-3.508	0.232	-3.276	≤ 12.35
	46	5230	-1.137	0.232	-0.905	≤ 12.35
	54	5270	-3.641	0.232	-3.409	≤ 6.35
	62	5310	-4.654	0.232	-4.422	≤ 6.35
	102	5510	-3.683	0.232	-3.451	≤ 6.21
	110	5550	-3.180	0.232	-2.948	≤ 6.21
	134	5670	-3.050	0.232	-2.818	≤ 6.21
Mode 15	42	5210	-7.302	0.244	-7.058	≤ 12.35
	58	5290	-7.638	0.244	-7.394	≤ 6.35
	106	5530	-7.651	0.244	-7.407	≤ 6.21
Mode 16	36	5180	0.370	0.125	0.495	≤ 12.35
	40	5200	1.635	0.125	1.760	≤ 12.35
	48	5240	1.835	0.125	1.960	≤ 12.35
	52	5260	-2.121	0.125	-1.996	≤ 6.35
	56	5280	-1.723	0.125	-1.598	≤ 6.35
	64	5320	-2.196	0.125	-2.071	≤ 6.35
	100	5500	-2.587	0.125	-2.462	≤ 6.21
	112	5560	-2.750	0.125	-2.625	≤ 6.21
	140	5700	-2.032	0.125	-1.907	≤ 6.21
Mode 17	38	5190	-3.403	0.185	-3.218	≤ 12.35
	46	5230	-0.874	0.185	-0.689	≤ 12.35
	54	5270	-3.404	0.185	-3.219	≤ 6.35
	62	5310	-4.906	0.185	-4.721	≤ 6.35
	102	5510	-3.530	0.185	-3.345	≤ 6.21
	110	5550	-2.885	0.185	-2.700	≤ 6.21
	134	5670	-2.988	0.185	-2.803	≤ 6.21
Mode 18	42	5210	-6.922	0.217	-6.705	≤ 12.35
	58	5290	-7.133	0.217	-6.916	≤ 6.35
	106	5530	-7.407	0.217	-7.190	≤ 6.21

Note: Power Density = measured result + 10 log (1/duty cycle) + Conversion ratio = measured result + duty factory.

ANT-1						
操作模式	頻道 (CH)	頻率 (MHz)	量測值 (dBm/100 kHz)	Duty Factor (dB)	轉換值 (dBm/500 kHz)	限制值 (dBm/500 kHz)
Mode 13	149	5745	-7.950	0.168	-0.793	≤ 25.31
	157	5785	-7.713	0.168	-0.556	≤ 25.31
	165	5825	-7.411	0.168	-0.254	≤ 25.31
Mode 14	151	5755	-10.716	0.232	-3.494	≤ 25.31
	159	5795	-10.834	0.232	-3.612	≤ 25.31
Mode 15	155	5775	-14.130	0.244	-6.897	≤ 25.31
Mode 16	149	5745	-8.629	0.125	-1.515	≤ 25.31
	157	5785	-8.514	0.125	-1.400	≤ 25.31
	165	5825	-8.351	0.125	-1.237	≤ 25.31
Mode 17	151	5755	-11.491	0.185	-4.316	≤ 25.31
	159	5795	-11.699	0.185	-4.524	≤ 25.31
Mode 18	155	5775	-14.342	0.217	-7.135	≤ 25.31

Note: Power Density = measured result + 10 log (1/duty cycle) + Conversion ratio = measured result + duty factory.
Conversion ration = 10*Log(500 kHz/100 kHz)

ANT-2						
操作模式	頻道 (CH)	頻率 (MHz)	量測值 (dBm/MHz)	Duty Factor (dB)	轉換值 (dBm/MHz)	限制值 (dBm/MHz)
Mode 13	36	5180	1.449	0.168	1.617	≤ 12.35
	40	5200	1.053	0.168	1.221	≤ 12.35
	48	5240	1.343	0.168	1.511	≤ 12.35
	52	5260	-2.232	0.168	-2.064	≤ 6.35
	56	5280	-1.956	0.168	-1.788	≤ 6.35
	64	5320	-2.021	0.168	-1.853	≤ 6.35
	100	5500	-2.519	0.168	-2.351	≤ 6.21
	112	5560	-2.338	0.168	-2.170	≤ 6.21
	140	5700	-1.735	0.168	-1.567	≤ 6.21
Mode 14	38	5190	-3.423	0.232	-3.191	≤ 12.35
	46	5230	-1.388	0.232	-1.156	≤ 12.35
	54	5270	-3.518	0.232	-3.286	≤ 6.35
	62	5310	-4.569	0.232	-4.337	≤ 6.35
	102	5510	-3.985	0.232	-3.753	≤ 6.21
	110	5550	-3.506	0.232	-3.274	≤ 6.21
	134	5670	-3.106	0.232	-2.874	≤ 6.21
Mode 15	42	5210	-6.976	0.244	-6.732	≤ 12.35
	58	5290	-7.344	0.244	-7.100	≤ 6.35
	106	5530	-7.643	0.244	-7.399	≤ 6.21
Mode 16	36	5180	0.436	0.125	0.561	≤ 12.35
	40	5200	1.212	0.125	1.337	≤ 12.35
	48	5240	1.356	0.125	1.481	≤ 12.35
	52	5260	-2.113	0.125	-1.988	≤ 6.35
	56	5280	-1.912	0.125	-1.787	≤ 6.35
	64	5320	-2.276	0.125	-2.151	≤ 6.35
	100	5500	-2.761	0.125	-2.636	≤ 6.21
	112	5560	-2.747	0.125	-2.622	≤ 6.21
	140	5700	-2.463	0.125	-2.338	≤ 6.21
Mode 17	38	5190	-3.944	0.185	-3.759	≤ 12.35
	46	5230	-1.278	0.185	-1.093	≤ 12.35
	54	5270	-3.292	0.185	-3.107	≤ 6.35
	62	5310	-4.402	0.185	-4.217	≤ 6.35
	102	5510	-3.827	0.185	-3.642	≤ 6.21
	110	5550	-3.198	0.185	-3.013	≤ 6.21
	134	5670	-2.662	0.185	-2.477	≤ 6.21
Mode 18	42	5210	-7.701	0.217	-7.484	≤ 12.35
	58	5290	-7.382	0.217	-7.165	≤ 6.35
	106	5530	-7.537	0.217	-7.320	≤ 6.21

Note: Power Density = measured result + 10 log (1/duty cycle) + Conversion ratio = measured result + duty factory.

ANT-2						
操作模式	頻道 (CH)	頻率 (MHz)	量測值 (dBm/100 kHz)	Duty Factor (dB)	轉換值 (dBm/500 kHz)	限制值 (dBm/500 kHz)
Mode 13	149	5745	-7.167	0.168	-0.010	≤ 25.31
	157	5785	-7.191	0.168	-0.034	≤ 25.31
	165	5825	-7.794	0.168	-0.637	≤ 25.31
Mode 14	151	5755	-10.032	0.232	-2.810	≤ 25.31
	159	5795	-10.273	0.232	-3.051	≤ 25.31
Mode 15	155	5775	-13.186	0.244	-5.953	≤ 25.31
Mode 16	149	5745	-7.913	0.125	-0.799	≤ 25.31
	157	5785	-7.990	0.125	-0.876	≤ 25.31
	165	5825	-8.038	0.125	-0.924	≤ 25.31
Mode 17	151	5755	-10.302	0.185	-3.127	≤ 25.31
	159	5795	-10.551	0.185	-3.376	≤ 25.31
Mode 18	155	5775	-13.218	0.217	-6.011	≤ 25.31

Note: Power Density = measured result + 10 log (1/duty cycle) + Conversion ratio = measured result + duty factory.
Conversion ration = 10*Log(500 kHz/100 kHz)

ANT-3						
操作模式	頻道 (CH)	頻率 (MHz)	量測值 (dBm/MHz)	Duty Factor (dB)	轉換值 (dBm/MHz)	限制值 (dBm/MHz)
Mode 13	36	5180	0.998	0.168	1.166	≤ 12.35
	40	5200	1.647	0.168	1.815	≤ 12.35
	48	5240	1.404	0.168	1.572	≤ 12.35
	52	5260	-2.490	0.168	-2.322	≤ 6.35
	56	5280	-1.884	0.168	-1.716	≤ 6.35
	64	5320	-2.121	0.168	-1.953	≤ 6.35
	100	5500	-2.487	0.168	-2.319	≤ 6.21
	112	5560	-2.491	0.168	-2.323	≤ 6.21
	140	5700	-1.545	0.168	-1.377	≤ 6.21
Mode 14	38	5190	-3.886	0.232	-3.654	≤ 12.35
	46	5230	-1.373	0.232	-1.141	≤ 12.35
	54	5270	-3.526	0.232	-3.294	≤ 6.35
	62	5310	-4.852	0.232	-4.620	≤ 6.35
	102	5510	-3.545	0.232	-3.313	≤ 6.21
	110	5550	-3.000	0.232	-2.768	≤ 6.21
	134	5670	-3.211	0.232	-2.979	≤ 6.21
Mode 15	42	5210	-7.550	0.244	-7.306	≤ 12.35
	58	5290	-7.780	0.244	-7.536	≤ 6.35
	106	5530	-7.857	0.244	-7.613	≤ 6.21
Mode 16	36	5180	0.454	0.125	0.579	≤ 12.35
	40	5200	1.848	0.125	1.973	≤ 12.35
	48	5240	1.589	0.125	1.714	≤ 12.35
	52	5260	-2.319	0.125	-2.194	≤ 6.35
	56	5280	-2.211	0.125	-2.086	≤ 6.35
	64	5320	-2.440	0.125	-2.315	≤ 6.35
	100	5500	-2.478	0.125	-2.353	≤ 6.21
	112	5560	-2.650	0.125	-2.525	≤ 6.21
	140	5700	-1.835	0.125	-1.710	≤ 6.21
Mode 17	38	5190	-3.588	0.185	-3.403	≤ 12.35
	46	5230	-1.120	0.185	-0.935	≤ 12.35
	54	5270	-3.046	0.185	-2.861	≤ 6.35
	62	5310	-4.902	0.185	-4.717	≤ 6.35
	102	5510	-3.542	0.185	-3.357	≤ 6.21
	110	5550	-2.523	0.185	-2.338	≤ 6.21
	134	5670	-3.023	0.185	-2.838	≤ 6.21
Mode 18	42	5210	-7.474	0.217	-7.257	≤ 12.35
	58	5290	-7.432	0.217	-7.215	≤ 6.35
	106	5530	-7.586	0.217	-7.369	≤ 6.21

Note: Power Density = measured result + 10 log (1/duty cycle) + Conversion ratio = measured result + duty factory.

ANT-3						
操作模式	頻道 (CH)	頻率 (MHz)	量測值 (dBm/100 kHz)	Duty Factor (dB)	轉換值 (dBm/500 kHz)	限制值 (dBm/500 kHz)
Mode 13	149	5745	-7.619	0.168	-0.462	≤ 25.31
	157	5785	-7.738	0.168	-0.581	≤ 25.31
	165	5825	-7.880	0.168	-0.723	≤ 25.31
Mode 14	151	5755	-10.495	0.232	-3.273	≤ 25.31
	159	5795	-10.576	0.232	-3.354	≤ 25.31
Mode 15	155	5775	-13.673	0.244	-6.440	≤ 25.31
Mode 16	149	5745	-8.397	0.125	-1.283	≤ 25.31
	157	5785	-8.840	0.125	-1.726	≤ 25.31
	165	5825	-8.564	0.125	-1.450	≤ 25.31
Mode 17	151	5755	-11.182	0.185	-4.007	≤ 25.31
	159	5795	-11.375	0.185	-4.200	≤ 25.31
Mode 18	155	5775	-14.122	0.217	-6.915	≤ 25.31




Note: Power Density = measured result + 10 log (1/duty cycle) + Conversion ratio = measured result + duty factory.
Conversion ration = 10*Log(500 kHz/100 kHz)




ANT-0+1+2+3				
操作模式	頻道 (CH)	頻率 (MHz)	轉換值(dBm/MHz)	限制值 (dBm/MHz)
Mode 13	36	5180	7.220	≤ 12.35
	40	5200	7.495	≤ 12.35
	48	5240	7.579	≤ 12.35
	52	5260	4.144	≤ 6.35
	56	5280	4.248	≤ 6.35
	64	5320	4.294	≤ 6.35
	100	5500	3.922	≤ 6.21
	112	5560	4.129	≤ 6.21
	140	5700	4.618	≤ 6.21
Mode 14	38	5190	2.536	≤ 12.35
	46	5230	4.961	≤ 12.35
	54	5270	2.756	≤ 6.35
	62	5310	1.588	≤ 6.35
	102	5510	2.686	≤ 6.21
	110	5550	3.247	≤ 6.21
	134	5670	3.317	≤ 6.21
Mode 15	42	5210	-1.002	≤ 12.35
	58	5290	-1.198	≤ 6.35
	106	5530	-1.226	≤ 6.21
Mode 16	36	5180	6.485	≤ 12.35
	40	5200	7.780	≤ 12.35
	48	5240	7.802	≤ 12.35
	52	5260	4.058	≤ 6.35
	56	5280	4.360	≤ 6.35
	64	5320	3.961	≤ 6.35
	100	5500	3.705	≤ 6.21
	112	5560	3.633	≤ 6.21
	140	5700	3.980	≤ 6.21
Mode 17	38	5190	2.485	≤ 12.35
	46	5230	5.125	≤ 12.35
	54	5270	3.012	≤ 6.35
	62	5310	1.582	≤ 6.35
	102	5510	2.781	≤ 6.21
	110	5550	3.563	≤ 6.21
	134	5670	3.504	≤ 6.21
Mode 18	42	5210	-1.162	≤ 12.35
	58	5290	-1.019	≤ 6.35
	106	5530	-1.033	≤ 6.21




Note: Power Density = measured result + 10 log (1/duty cycle) + Conversion ratio = measured result + duty factory.




ANT-0+1+2+3				
操作模式	頻道 (CH)	頻率 (MHz)	轉換值(dBm/500 kHz)	限制值 (dBm/500 kHz)
Mode 13	149	5745	5.512	≤ 25.31
	157	5785	5.490	≤ 25.31
	165	5825	5.443	≤ 25.31
Mode 14	151	5755	2.729	≤ 25.31
	159	5795	2.598	≤ 25.31
Mode 15	155	5775	-0.486	≤ 25.31
Mode 16	149	5745	4.728	≤ 25.31
	157	5785	4.617	≤ 25.31
	165	5825	4.731	≤ 25.31
Mode 17	151	5755	2.055	≤ 25.31
	159	5795	1.925	≤ 25.31
Mode 18	155	5775	-0.831	≤ 25.31

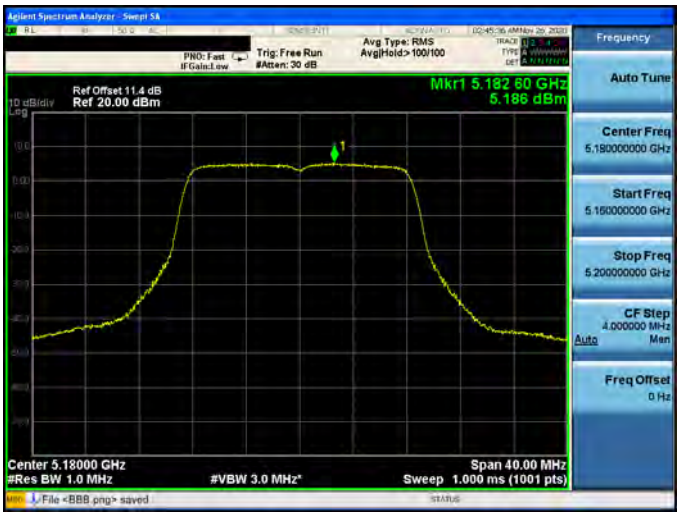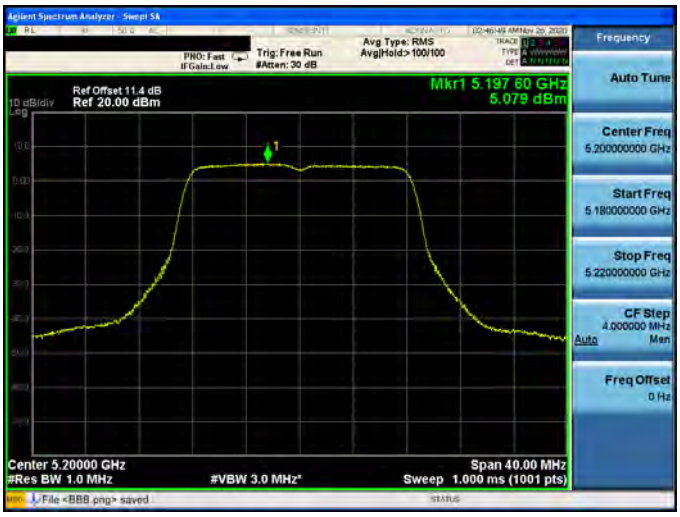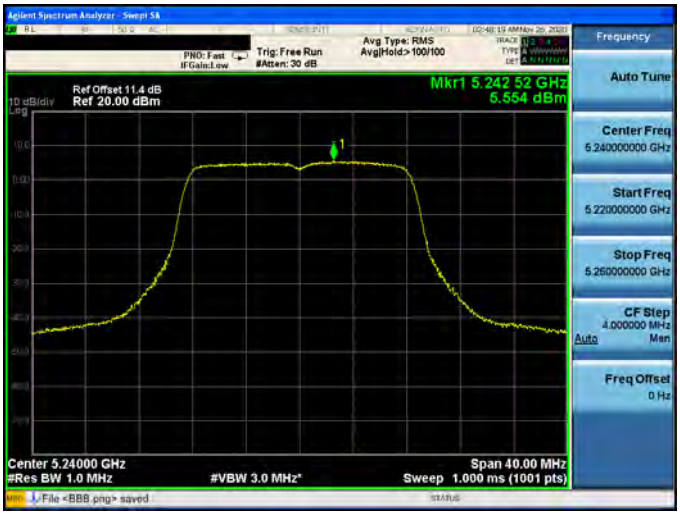Note: Power Density = measured result + 10 log (1/duty cycle) + Conversion ratio = measured result + duty factory.
Conversion ration = 10*Log(500 kHz/100 kHz)

Mode 10: IEEE 802.11a Continuous TX Mode_ANT-0	
5180 MHz	
5200 MHz	
5240 MHz	

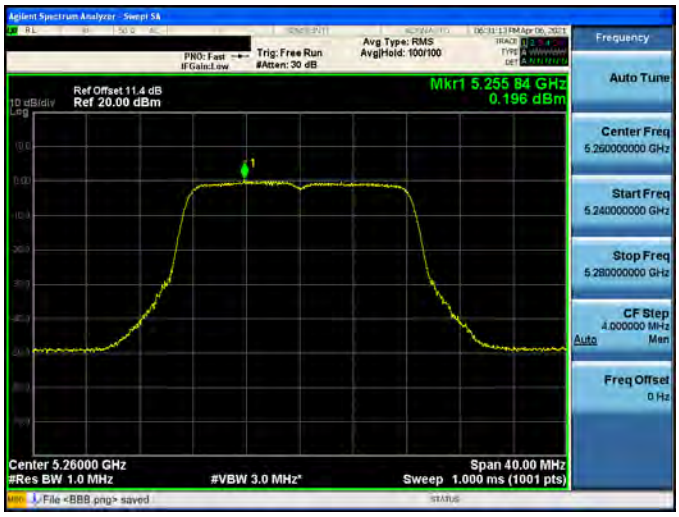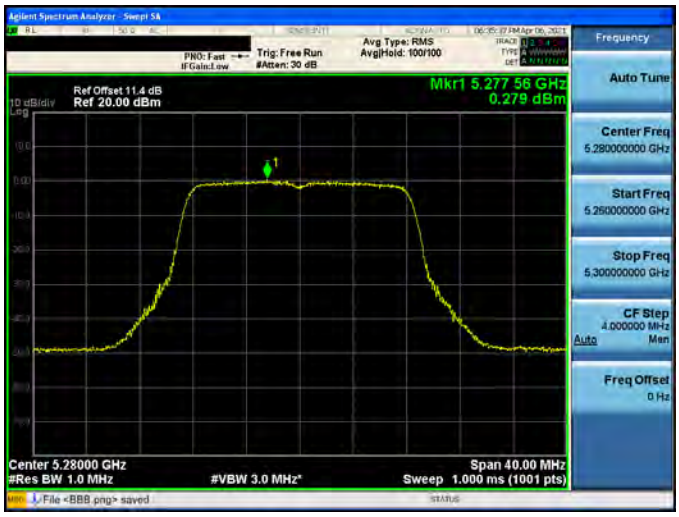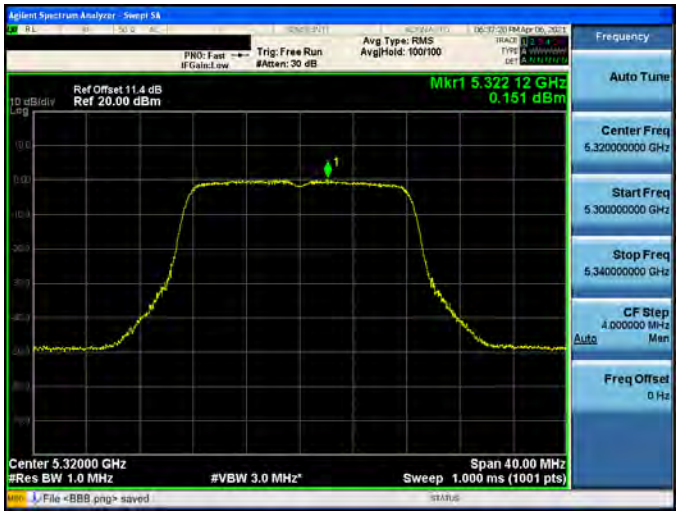
Mode 10: IEEE 802.11a Continuous TX Mode_ANT-0	
5260 MHz	
5280 MHz	
5320 MHz	

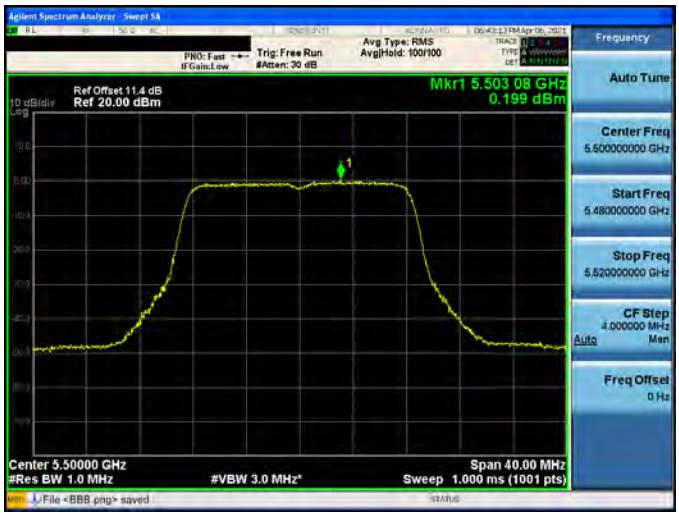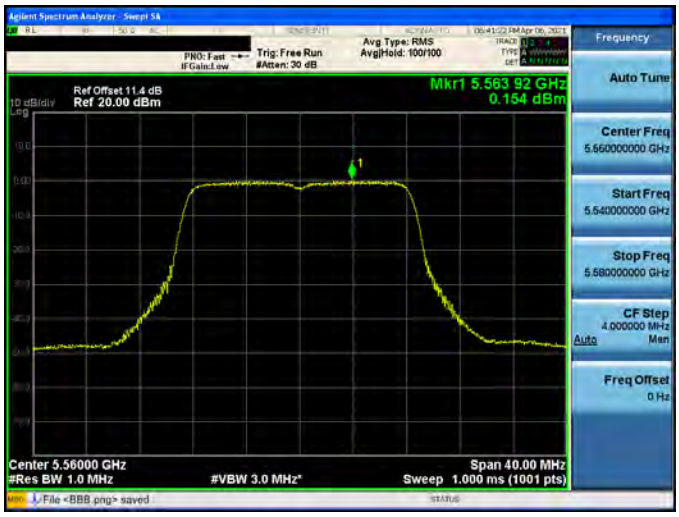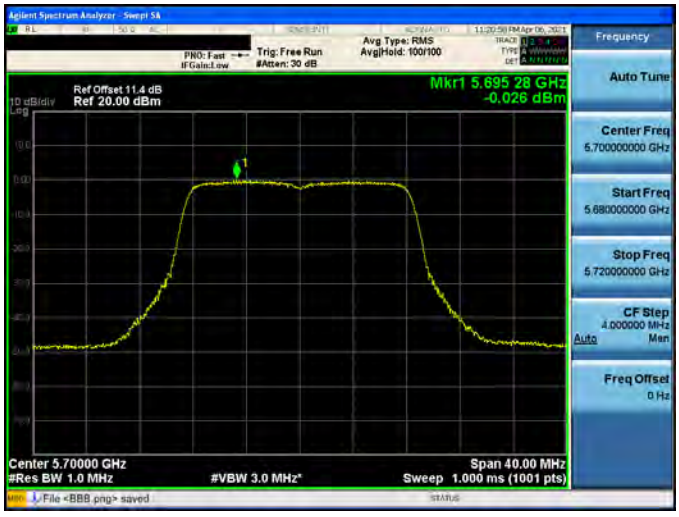Mode 10: IEEE 802.11a Continuous TX Mode_ANT-0	
5500 MHz	
5560 MHz	
5700 MHz	

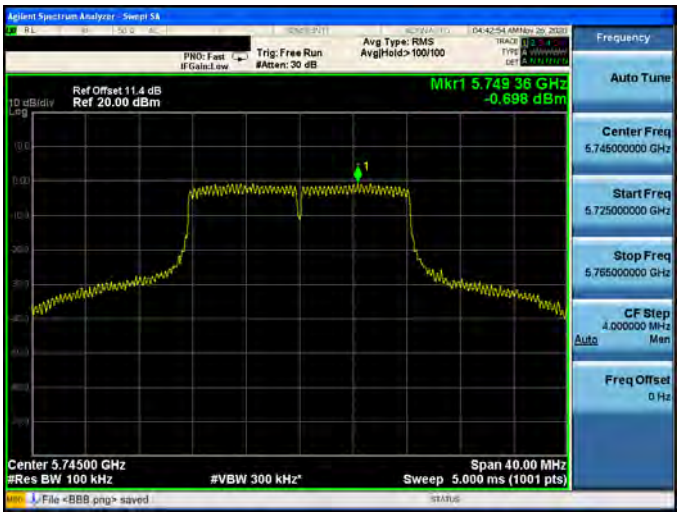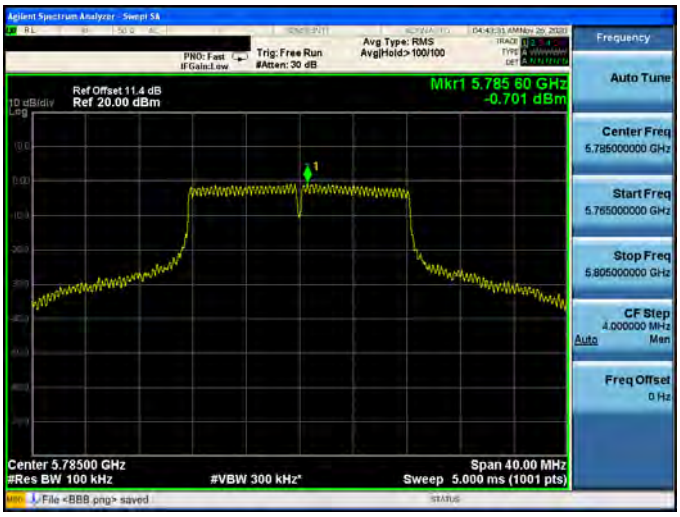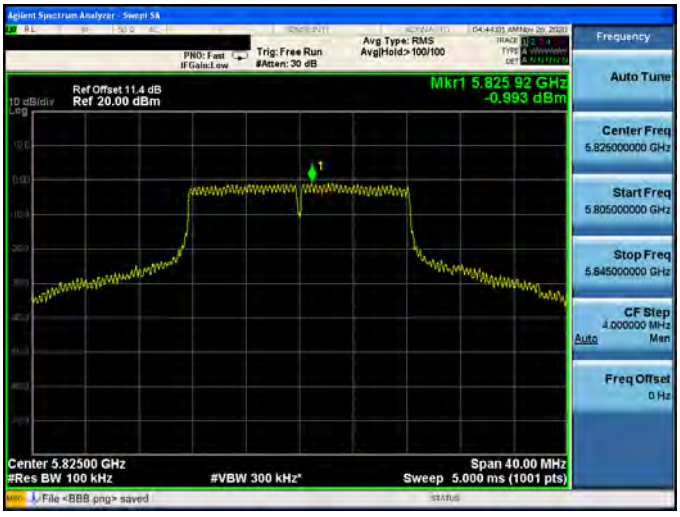Mode 10: IEEE 802.11a Continuous TX Mode_ANT-0	
5745 MHz	
5785 MHz	
5825 MHz	

Mode 13: IEEE 802.11ac 20 MHz Continuous TX Mode_ANT-0	
5180 MHz	
5200 MHz	
5240 MHz	

Mode 13: IEEE 802.11ac 20 MHz Continuous TX Mode_ANT-0	
5260 MHz	
5280 MHz	
5320 MHz	

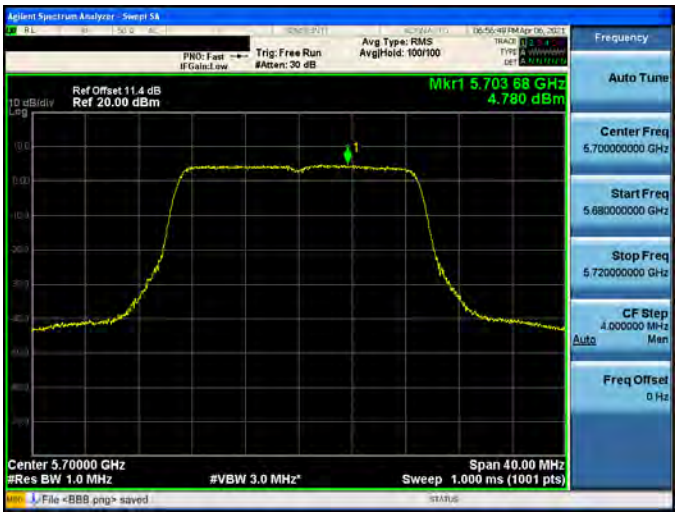Mode 13: IEEE 802.11ac 20 MHz Continuous TX Mode_ANT-0	
5500 MHz	
5560 MHz	
5700 MHz	

Mode 13: IEEE 802.11ac 20 MHz Continuous TX Mode_ANT-0	
5745 MHz	
5785 MHz	
5825 MHz	

Mode 14: IEEE 802.11ac 40 MHz Continuous TX Mode_ANT-0	
5190 MHz	
5230 MHz	

Mode 14: IEEE 802.11ac 40 MHz Continuous TX Mode_ANT-0	
5270 MHz	
5310 MHz	
5510 MHz	



Mode 14: IEEE 802.11ac 40 MHz Continuous TX Mode_ANT-0	
5550 MHz	
5670 MHz	


Mode 14: IEEE 802.11ac 40 MHz Continuous TX Mode_ANT-0	
5755 MHz	
5795 MHz	

Mode 15: IEEE 802.11ac 80 MHz Continuous TX Mode_ANT-0	
5210 MHz	
5290 MHz	
5530 MHz	

Mode 15: IEEE 802.11ac 80 MHz Continuous TX Mode_ANT-0	
5775 MHz	

Mode 16: IEEE 802.11ax 20 MHz Continuous TX Mode_ANT-0	
5180 MHz	
5200 MHz	
5240 MHz	

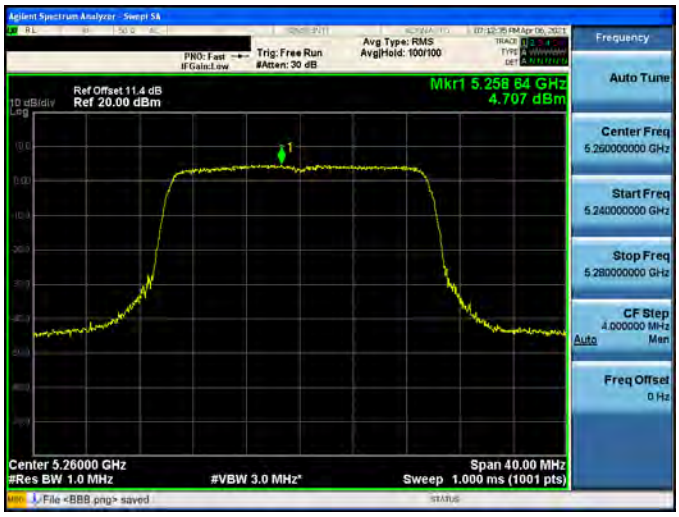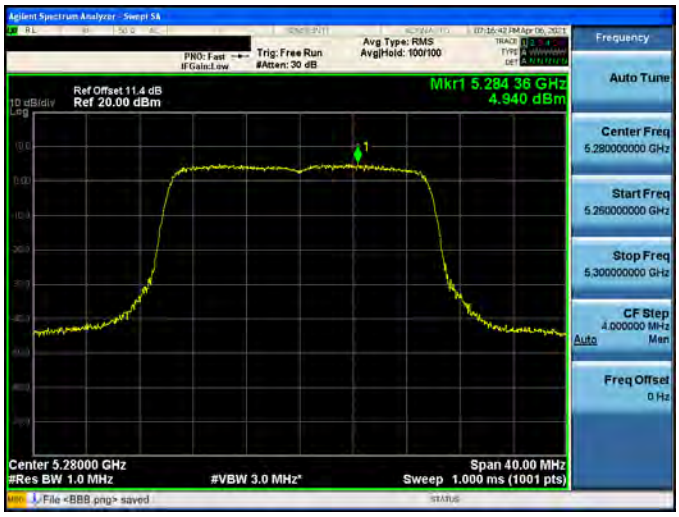Mode 16: IEEE 802.11ax 20 MHz Continuous TX Mode_ANT-0	
5260 MHz	
5280 MHz	
5320 MHz	

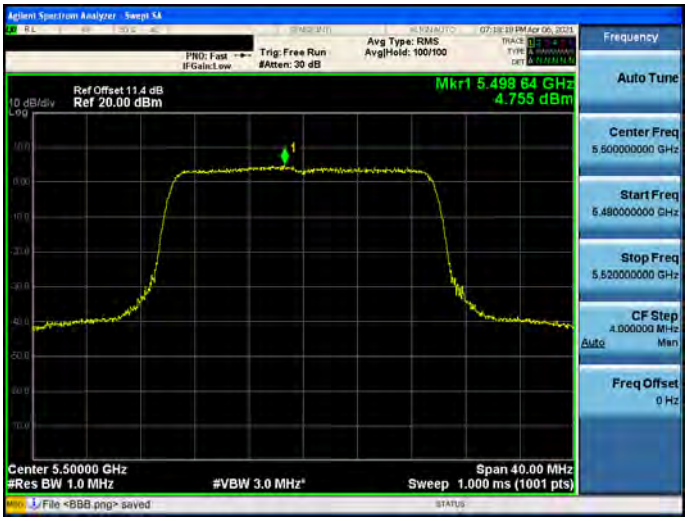Mode 16: IEEE 802.11ax 20 MHz Continuous TX Mode_ANT-0	
5500 MHz	
5560 MHz	
5700 MHz	

Mode 16: IEEE 802.11ax 20 MHz Continuous TX Mode_ANT-0	
5745 MHz	
5785 MHz	
5825 MHz	

Mode 17: IEEE 802.11ax 40 MHz Continuous TX Mode_ANT-0	
5190 MHz	
5230 MHz	


Mode 17: IEEE 802.11ax 40 MHz Continuous TX Mode_ANT-0	
5270 MHz	
5310 MHz	




Mode 17: IEEE 802.11ax 40 MHz Continuous TX Mode_ANT-0	
5510 MHz	
5550 MHz	
5670 MHz	




Mode 17: IEEE 802.11ax 40 MHz Continuous TX Mode_ANT-0	
5755 MHz	
5795 MHz	




Mode 18: IEEE 802.11ax 80 MHz Continuous TX Mode_ANT-0	
5210 MHz	
5290 MHz	

Mode 18: IEEE 802.11ax 80 MHz Continuous TX Mode_ANT-0	
5530 MHz	
5775 MHz	

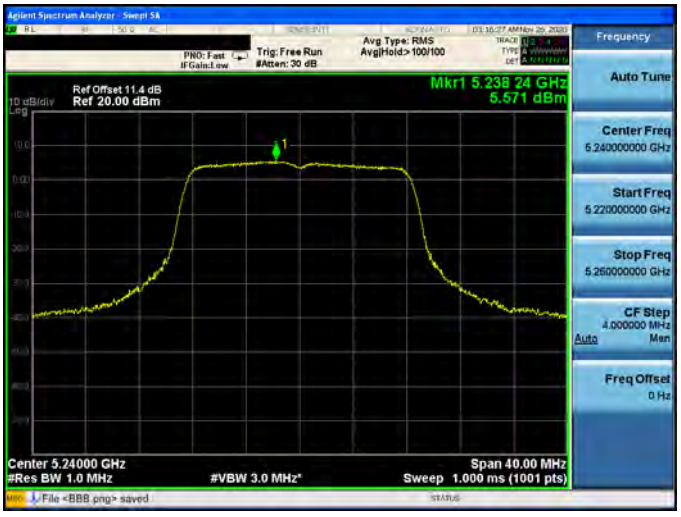Mode 10: IEEE 802.11a Continuous TX Mode_ANT-1	
5180 MHz	
5200 MHz	
5240 MHz	

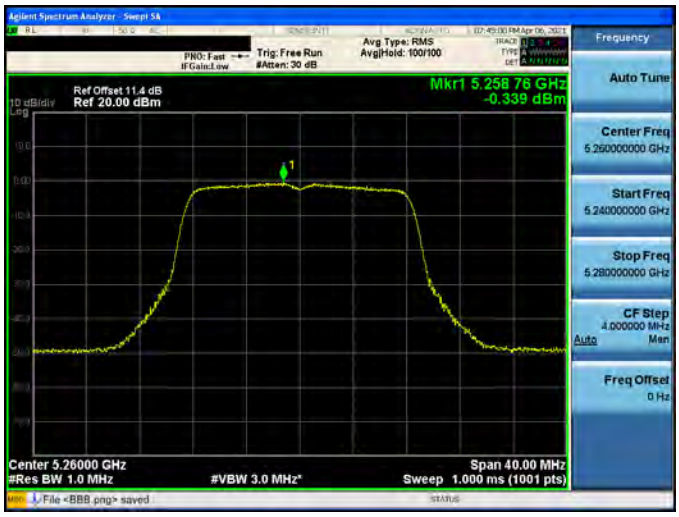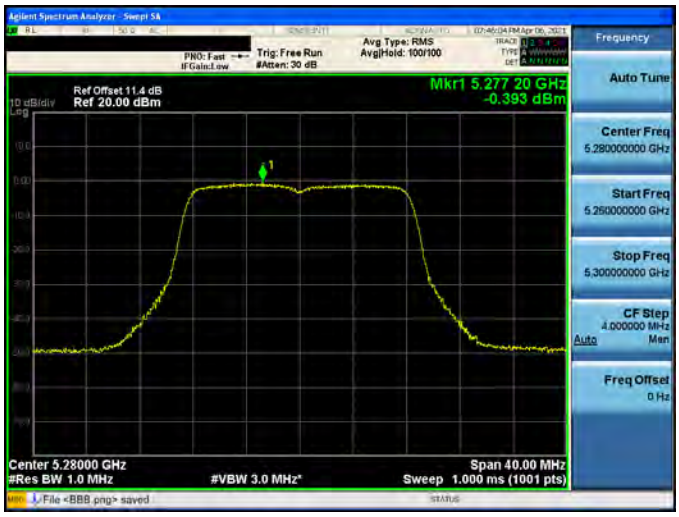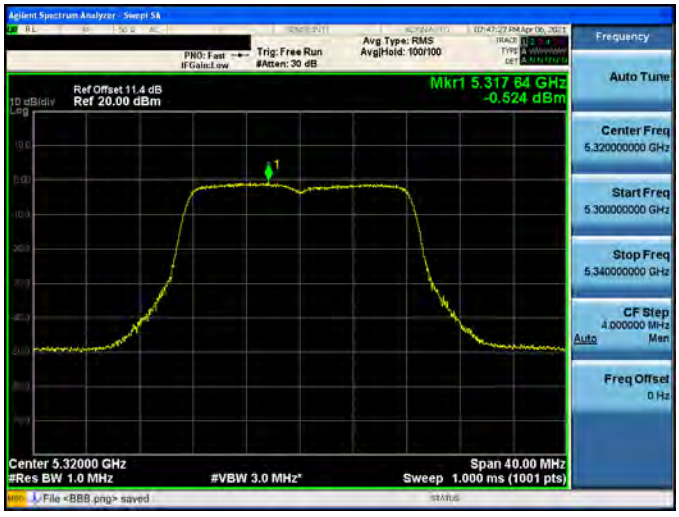
Mode 10: IEEE 802.11a Continuous TX Mode_ANT-1	
5260 MHz	
5280 MHz	
5320 MHz	

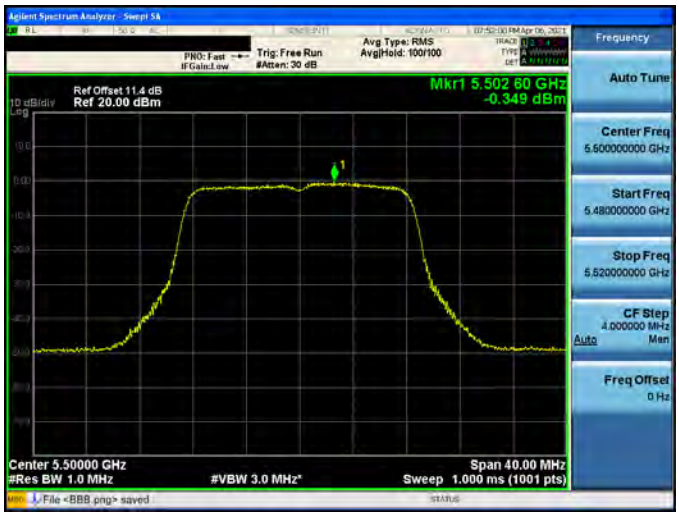
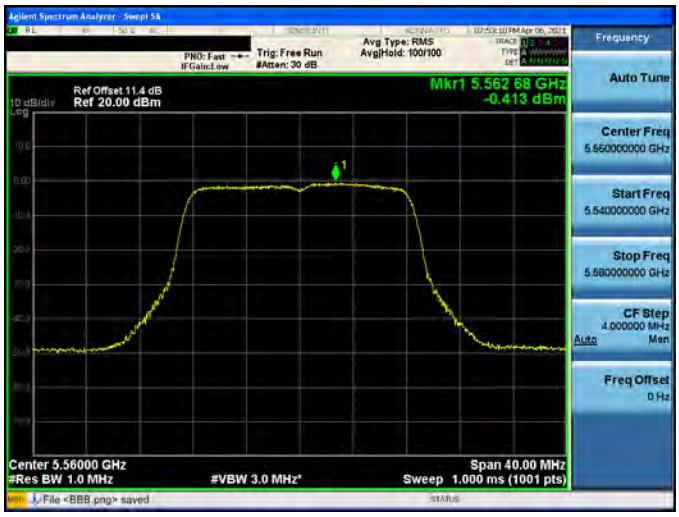
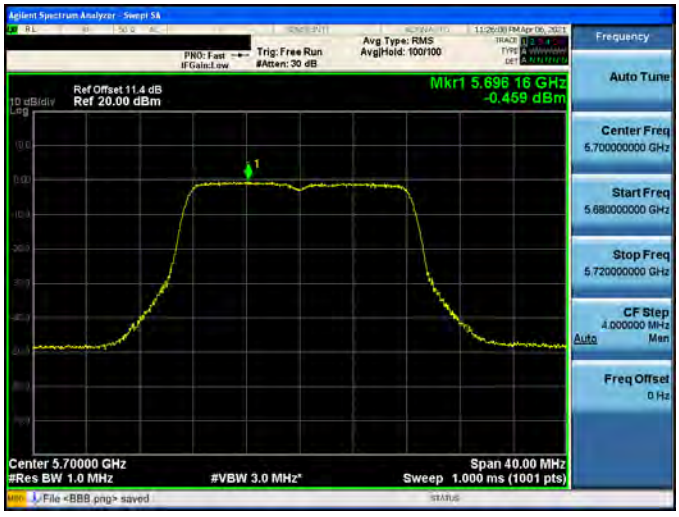
Mode 10: IEEE 802.11a Continuous TX Mode_ANT-1	
5500 MHz	
5560 MHz	
5700 MHz	

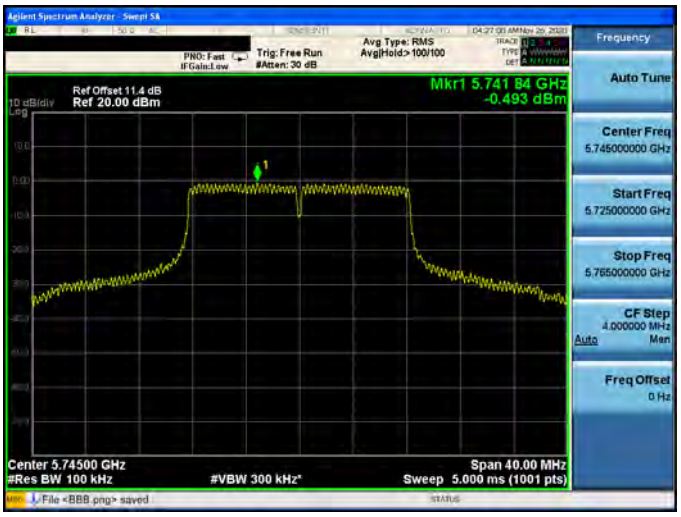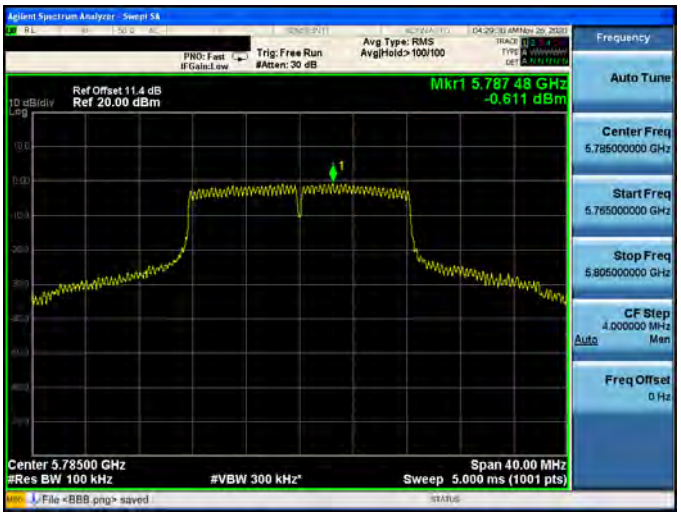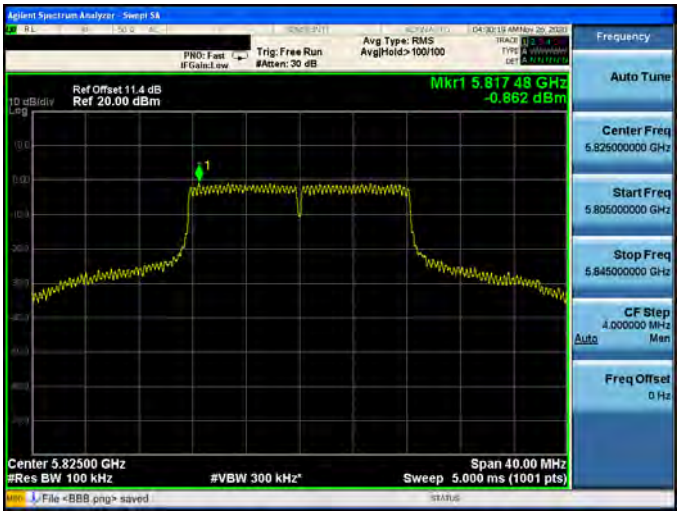Mode 10: IEEE 802.11a Continuous TX Mode_ANT-1	
5745 MHz	
5785 MHz	
5825 MHz	


Mode 13: IEEE 802.11ac 20 MHz Continuous TX Mode_ANT-1	
5180 MHz	
5200 MHz	
5240 MHz	

Mode 13: IEEE 802.11ac 20 MHz Continuous TX Mode_ANT-1	
5260 MHz	
5280 MHz	
5320 MHz	

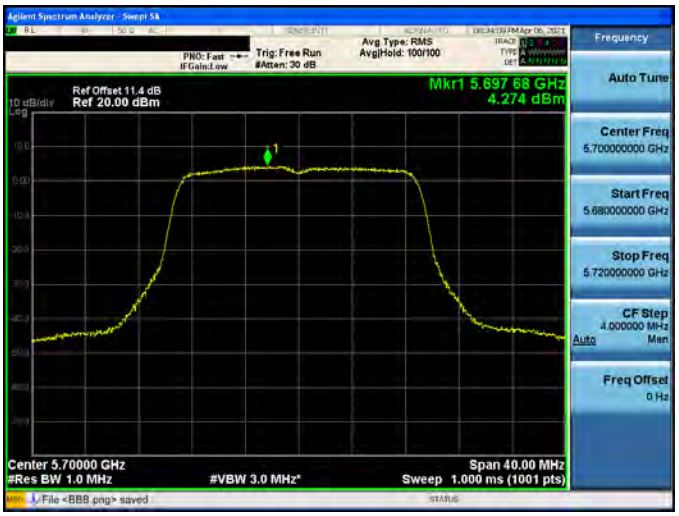
Mode 13: IEEE 802.11ac 20 MHz Continuous TX Mode_ANT-1	
5500 MHz	
5560 MHz	
5700 MHz	

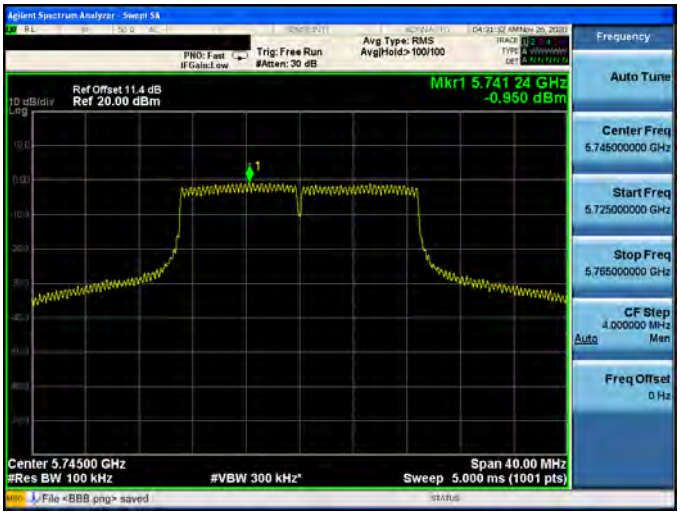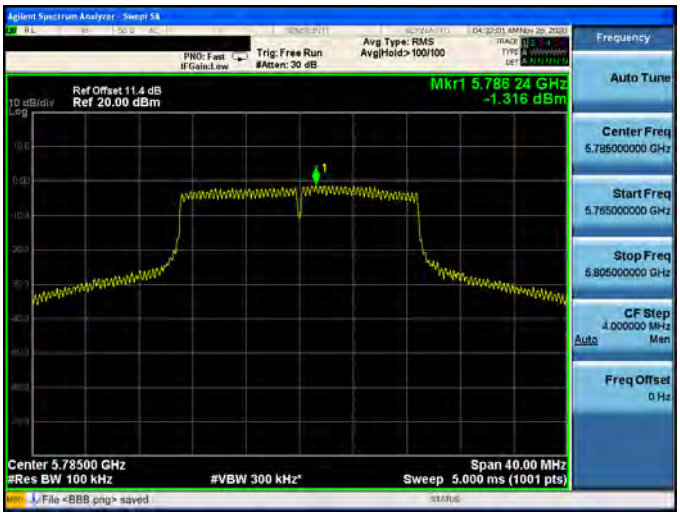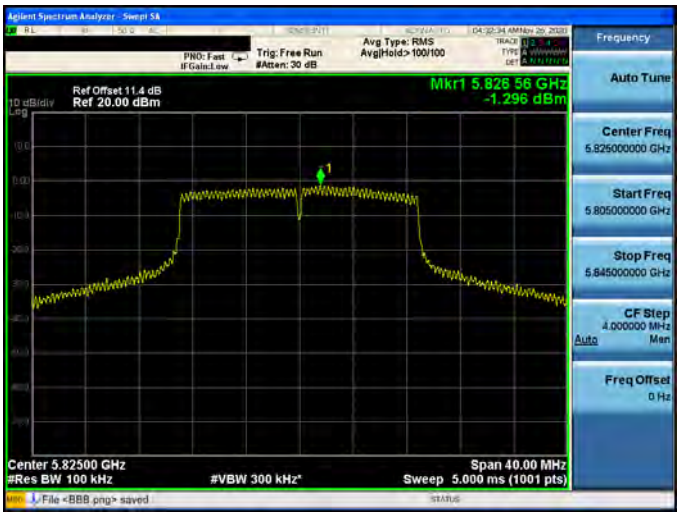Mode 13: IEEE 802.11ac 20 MHz Continuous TX Mode_ANT-1	
5745 MHz	
5785 MHz	
5825 MHz	

Mode 14: IEEE 802.11ac 40 MHz Continuous TX Mode_ANT-1	
5190 MHz	
5230 MHz	

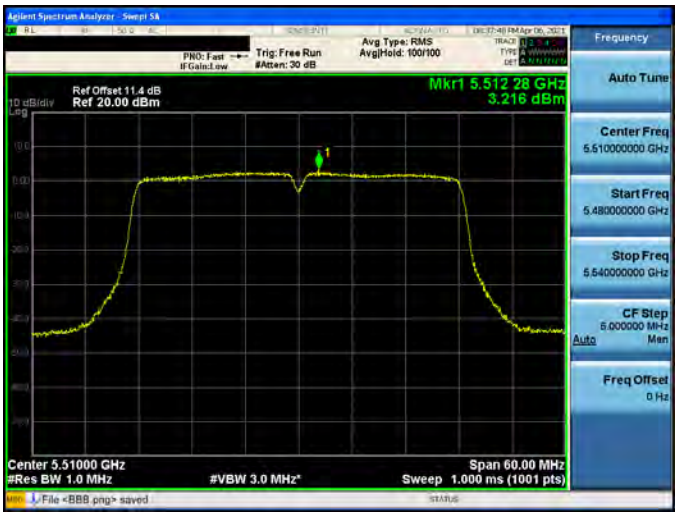Mode 14: IEEE 802.11ac 40 MHz Continuous TX Mode_ANT-1	
5270 MHz	
5310 MHz	
5510 MHz	




Mode 14: IEEE 802.11ac 40 MHz Continuous TX Mode_ANT-1	
5550 MHz	
5670 MHz	



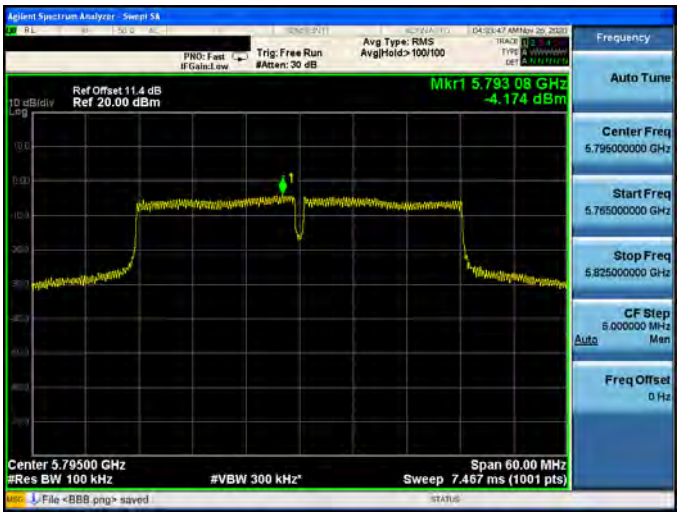
Mode 14: IEEE 802.11ac 40 MHz Continuous TX Mode_ANT-1	
5755 MHz	
5795 MHz	

Mode 15: IEEE 802.11ac 80 MHz Continuous TX Mode_ANT-1	
5210 MHz	
5290 MHz	
5530 MHz	

Mode 15: IEEE 802.11ac 80 MHz Continuous TX Mode_ANT-1	
5775 MHz	


Mode 16: IEEE 802.11ax 20 MHz Continuous TX Mode_ANT-1	
5180 MHz	
5200 MHz	
5240 MHz	

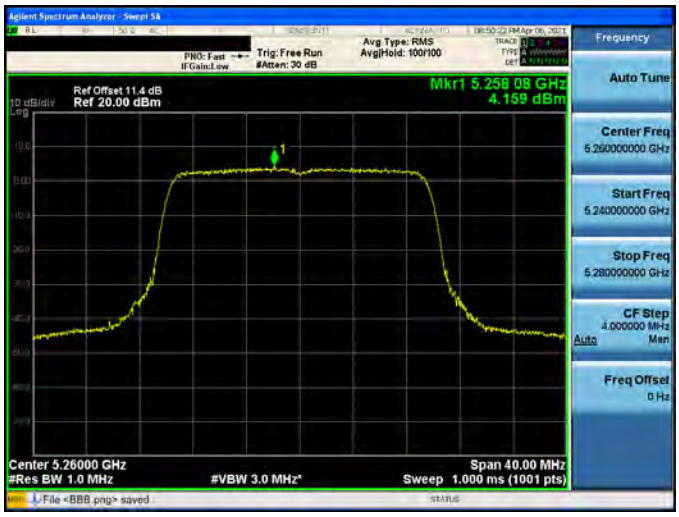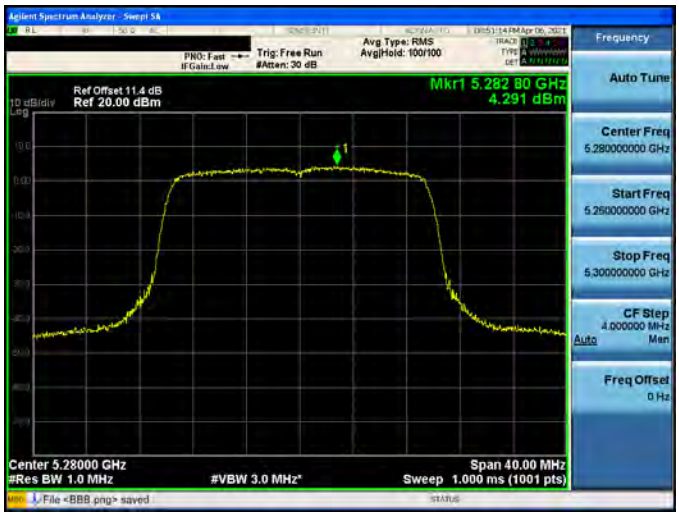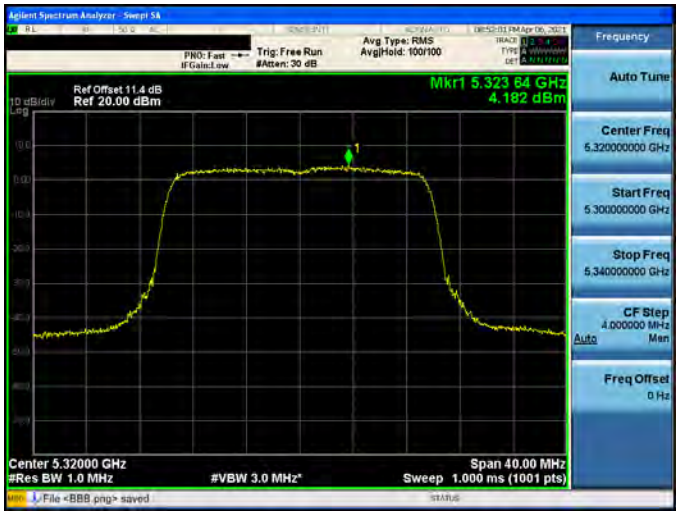Mode 16: IEEE 802.11ax 20 MHz Continuous TX Mode_ANT-1	
5260 MHz	
5280 MHz	
5320 MHz	

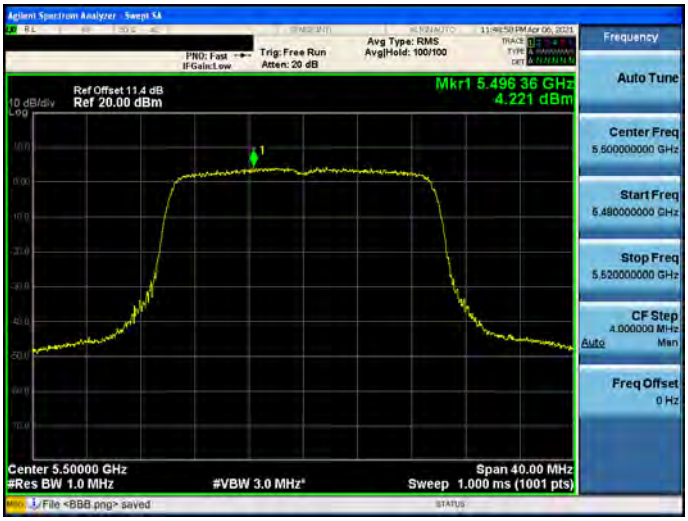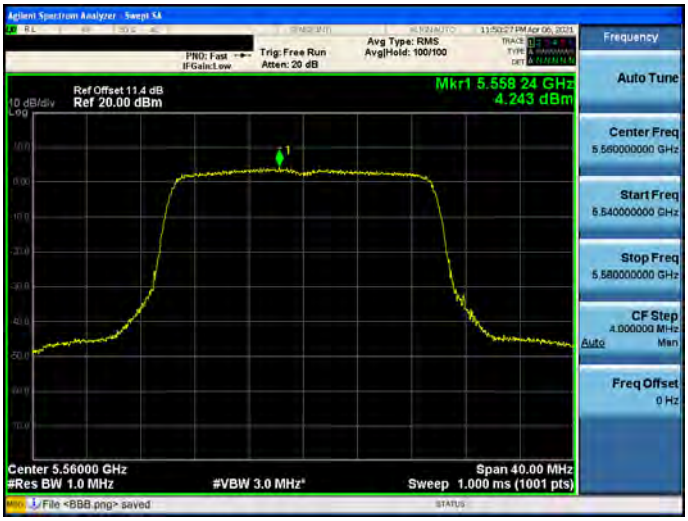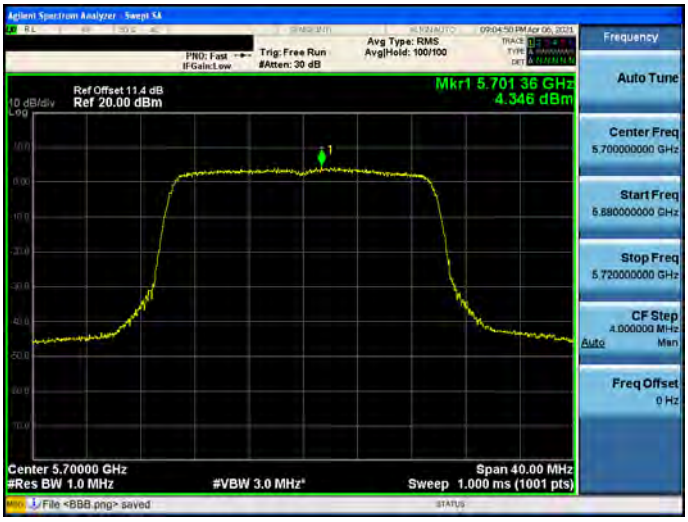Mode 16: IEEE 802.11ax 20 MHz Continuous TX Mode_ANT-1	
5500 MHz	
5560 MHz	
5700 MHz	

Mode 16: IEEE 802.11ax 20 MHz Continuous TX Mode_ANT-1	
5745 MHz	
5785 MHz	
5825 MHz	

Mode 17: IEEE 802.11ax 40 MHz Continuous TX Mode_ANT-1	
5190 MHz	
5230 MHz	


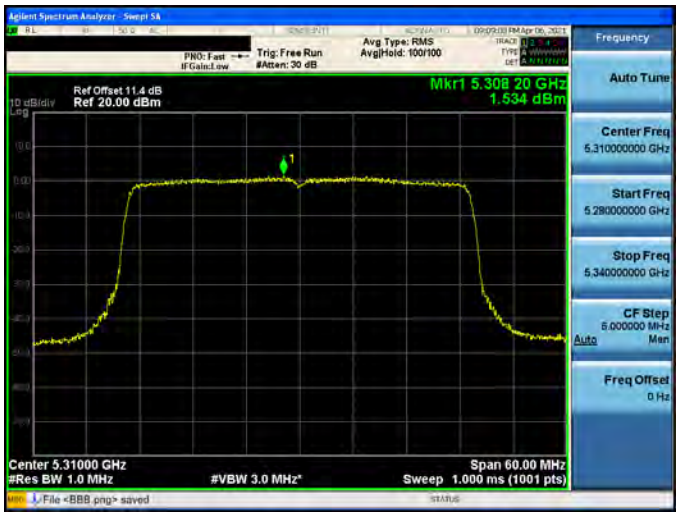
Mode 17: IEEE 802.11ax 40 MHz Continuous TX Mode_ANT-1	
5270 MHz	
5310 MHz	




Mode 17: IEEE 802.11ax 40 MHz Continuous TX Mode_ANT-1	
5510 MHz	
5550 MHz	
5670 MHz	



Mode 17: IEEE 802.11ax 40 MHz Continuous TX Mode_ANT-1	
5755 MHz	
5795 MHz	



Mode 18: IEEE 802.11ax 80 MHz Continuous TX Mode_ANT-1	
5210 MHz	
5290 MHz	

Mode 18: IEEE 802.11ax 80 MHz Continuous TX Mode_ANT-1	
5530 MHz	
5775 MHz	

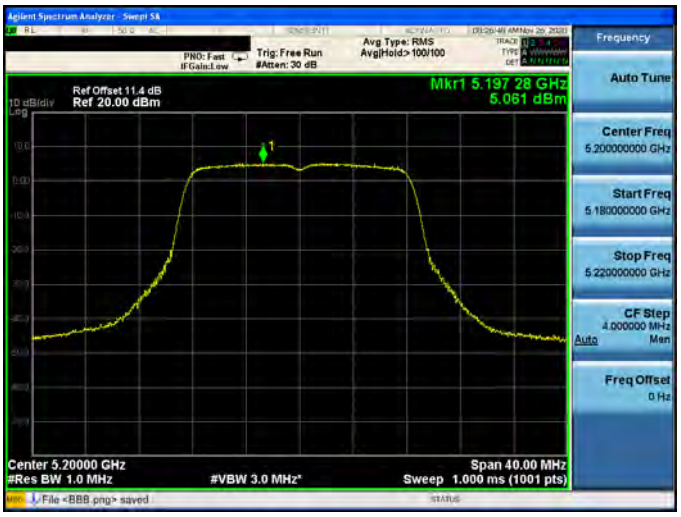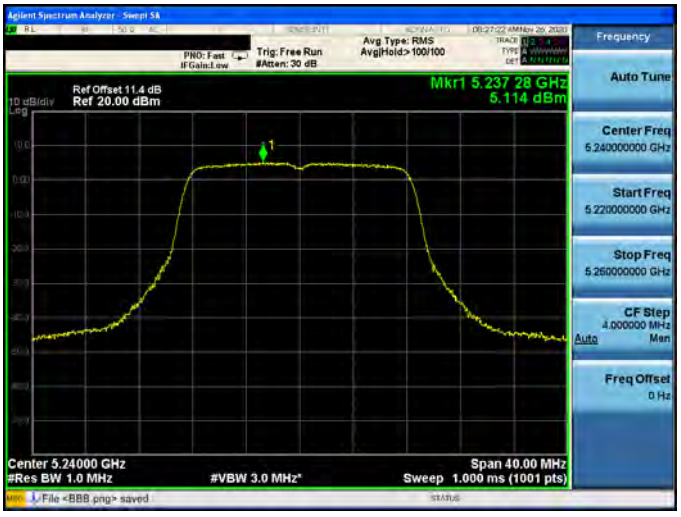
Mode 10: IEEE 802.11a Continuous TX Mode_ANT-2	
5180 MHz	
5200 MHz	
5240 MHz	

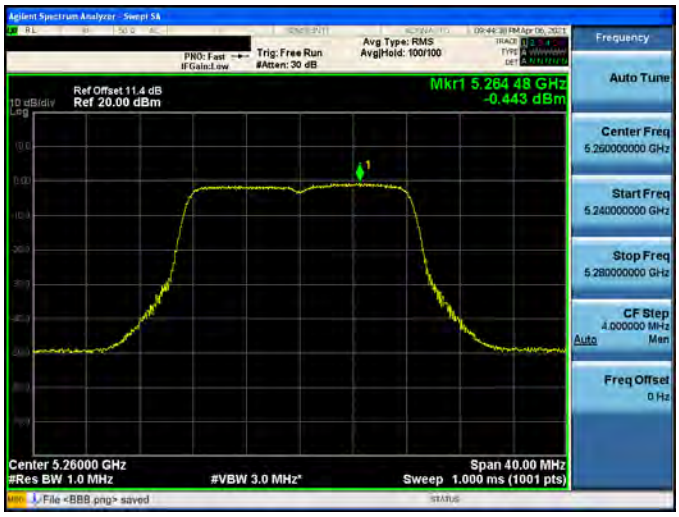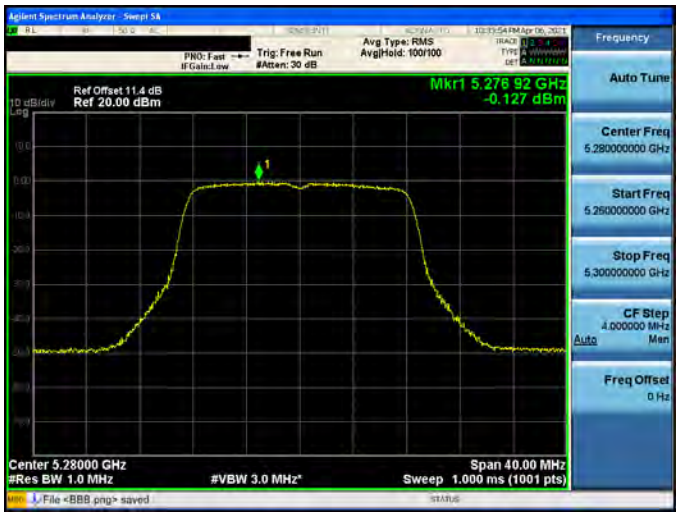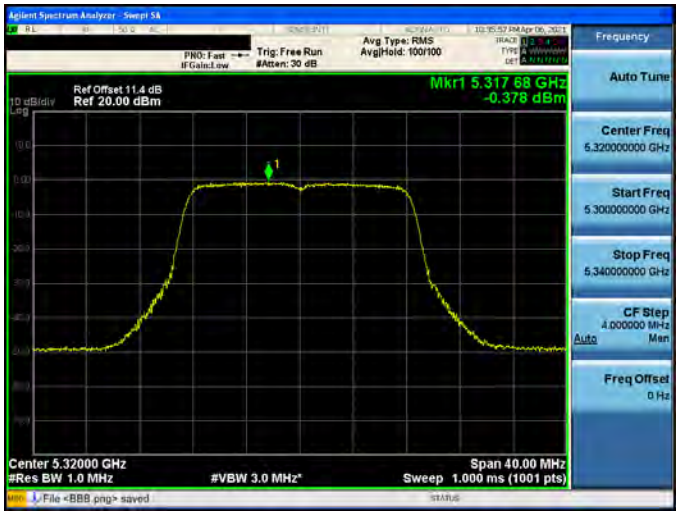Mode 10: IEEE 802.11a Continuous TX Mode_ANT-2	
5260 MHz	
5280 MHz	
5320 MHz	

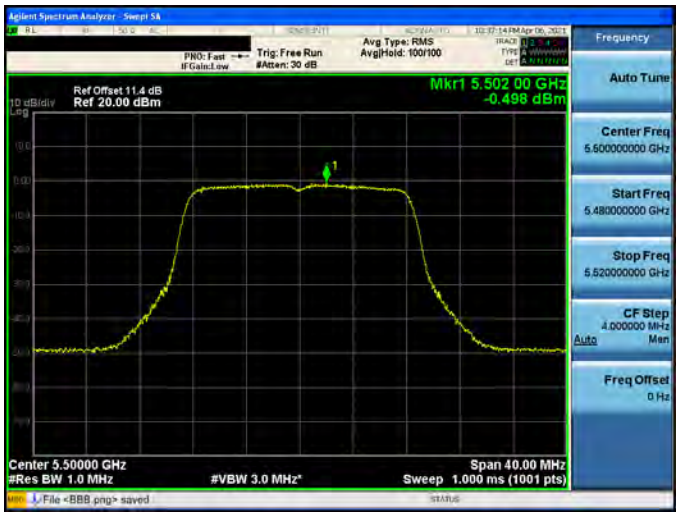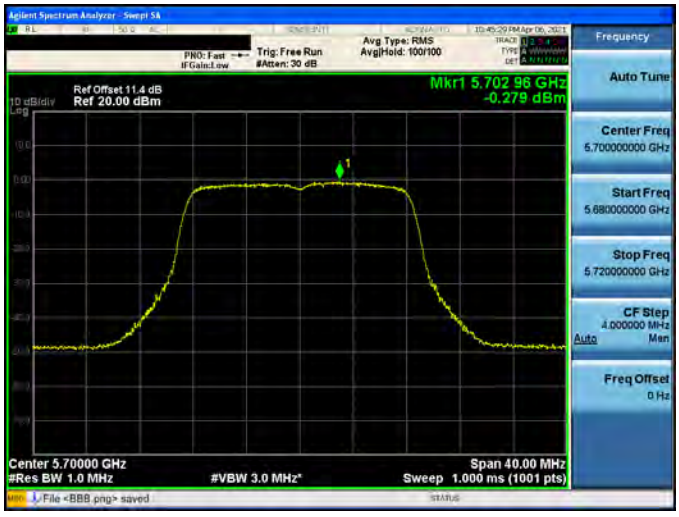Mode 10: IEEE 802.11a Continuous TX Mode_ANT-2	
5500 MHz	
5560 MHz	
5700 MHz	

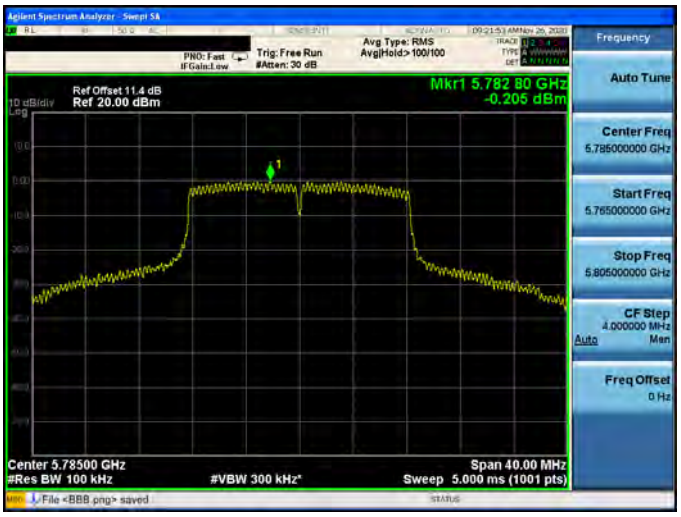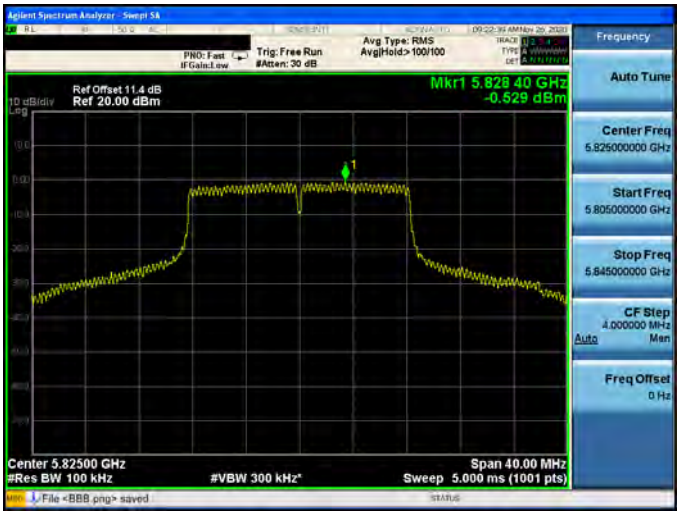Mode 10: IEEE 802.11a Continuous TX Mode_ANT-2	
5745 MHz	
5785 MHz	
5825 MHz	

Mode 13: IEEE 802.11ac 20 MHz Continuous TX Mode_ANT-2	
5180 MHz	
5200 MHz	
5240 MHz	

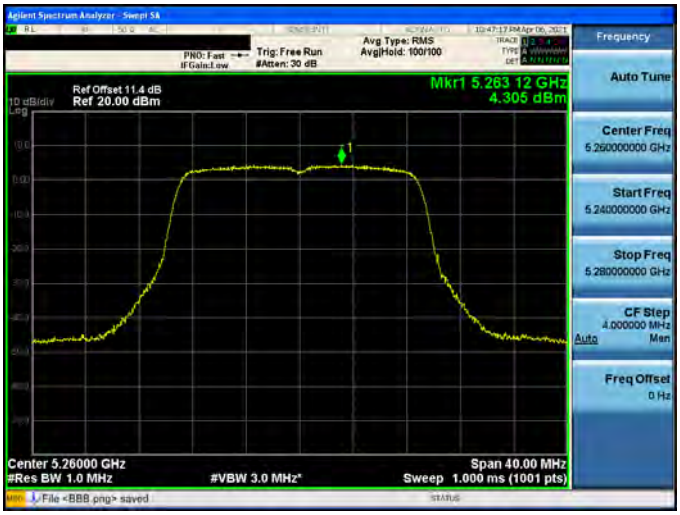Mode 13: IEEE 802.11ac 20 MHz Continuous TX Mode_ANT-2	
5260 MHz	
5280 MHz	
5320 MHz	

Mode 13: IEEE 802.11ac 20 MHz Continuous TX Mode_ANT-2	
5500 MHz	
5560 MHz	
5700 MHz	

Mode 13: IEEE 802.11ac 20 MHz Continuous TX Mode_ANT-2	
5745 MHz	
5785 MHz	
5825 MHz	

Mode 14: IEEE 802.11ac 40 MHz Continuous TX Mode_ANT-2	
5190 MHz	
5230 MHz	

Mode 14: IEEE 802.11ac 40 MHz Continuous TX Mode_ANT-2	
5270 MHz	
5310 MHz	
5510 MHz	

Mode 14: IEEE 802.11ac 40 MHz Continuous TX Mode_ANT-2	
5550 MHz	
5670 MHz	


Mode 14: IEEE 802.11ac 40 MHz Continuous TX Mode_ANT-2	
5755 MHz	
5795 MHz	

Mode 15: IEEE 802.11ac 80 MHz Continuous TX Mode_ANT-2	
5210 MHz	
5290 MHz	
5530 MHz	

Mode 15: IEEE 802.11ac 80 MHz Continuous TX Mode_ANT-2	
5775 MHz	

Mode 16: IEEE 802.11ax 20 MHz Continuous TX Mode_ANT-2	
5180 MHz	
5200 MHz	
5240 MHz	

Mode 16: IEEE 802.11ax 20 MHz Continuous TX Mode_ANT-2	
5260 MHz	
5280 MHz	
5320 MHz	

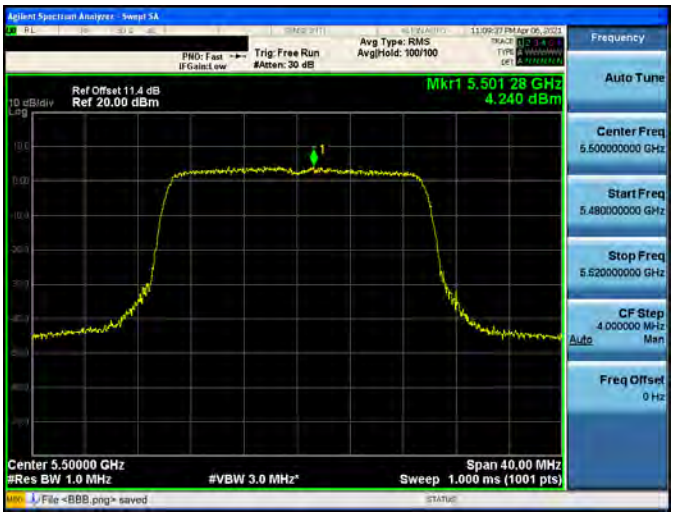Mode 16: IEEE 802.11ax 20 MHz Continuous TX Mode_ANT-2	
5500 MHz	
5560 MHz	
5700 MHz	


Mode 16: IEEE 802.11ax 20 MHz Continuous TX Mode_ANT-2	
5745 MHz	
5785 MHz	
5825 MHz	

Mode 17: IEEE 802.11ax 40 MHz Continuous TX Mode_ANT-2	
5190 MHz	
5230 MHz	


Mode 17: IEEE 802.11ax 40 MHz Continuous TX Mode_ANT-2	
5270 MHz	
5310 MHz	



Mode 17: IEEE 802.11ax 40 MHz Continuous TX Mode_ANT-2	
5510 MHz	
5550 MHz	
5670 MHz	




Mode 17: IEEE 802.11ax 40 MHz Continuous TX Mode_ANT-2	
5755 MHz	
5795 MHz	



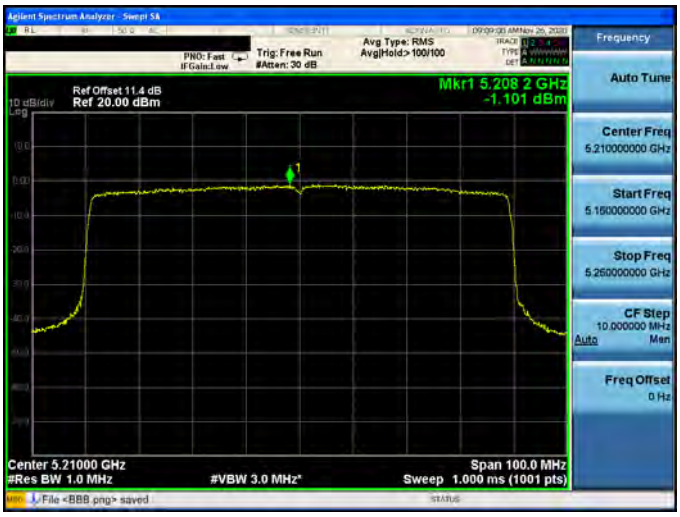
Mode 18: IEEE 802.11ax 80 MHz Continuous TX Mode_ANT-2	
5210 MHz	
5290 MHz	

Mode 18: IEEE 802.11ax 80 MHz Continuous TX Mode_ANT-2	
5530 MHz	
5775 MHz	

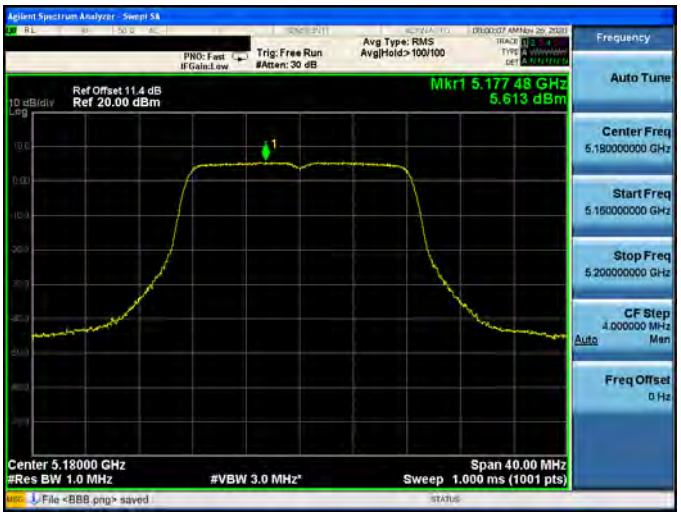
Mode 10: IEEE 802.11a Continuous TX Mode_ANT-3	
5180 MHz	
5200 MHz	
5240 MHz	

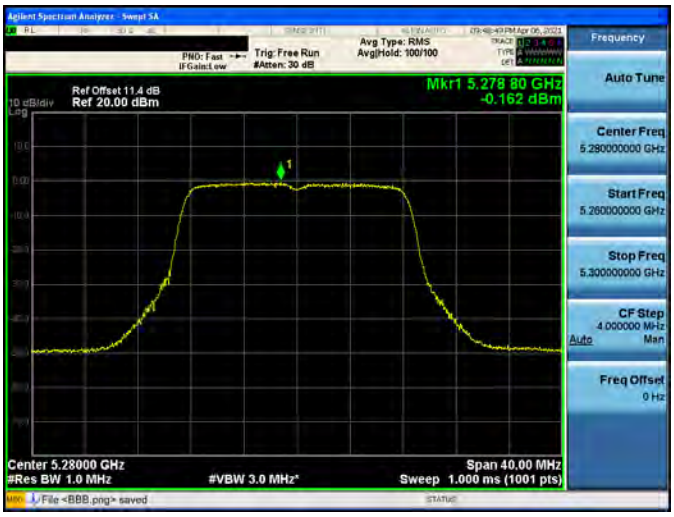
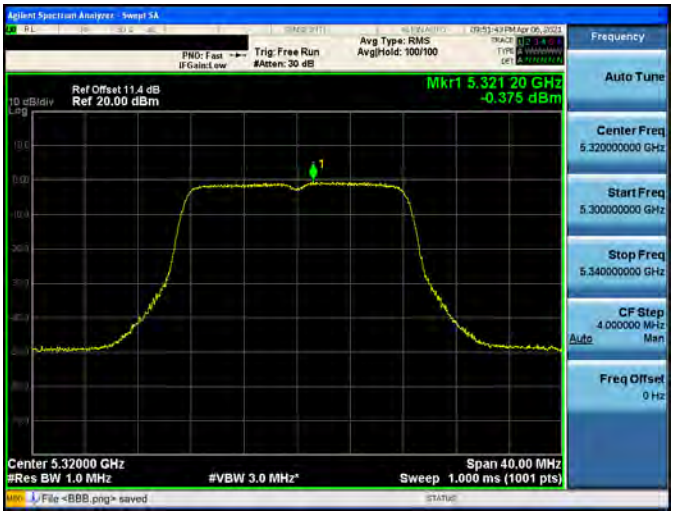
Mode 10: IEEE 802.11a Continuous TX Mode_ANT-3	
5260 MHz	
5280 MHz	
5320 MHz	

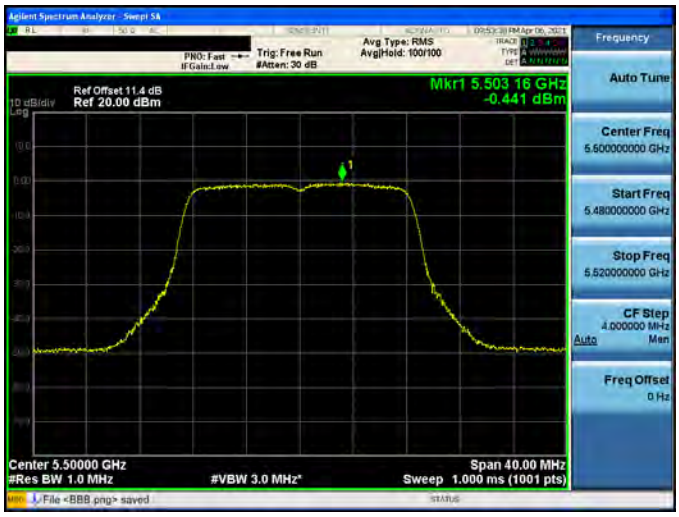
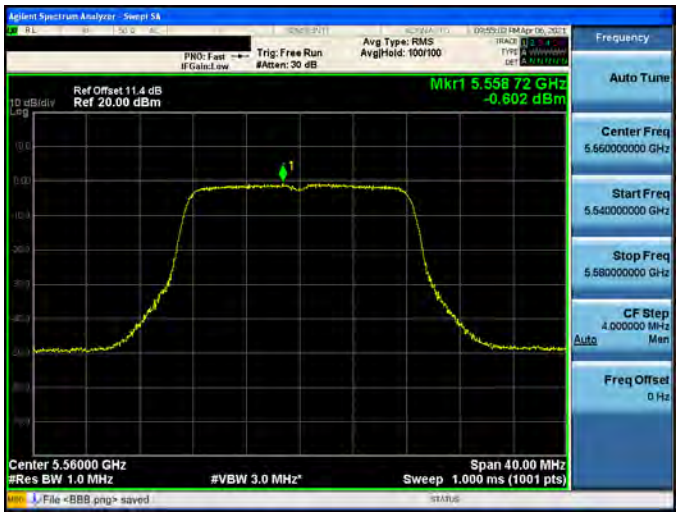
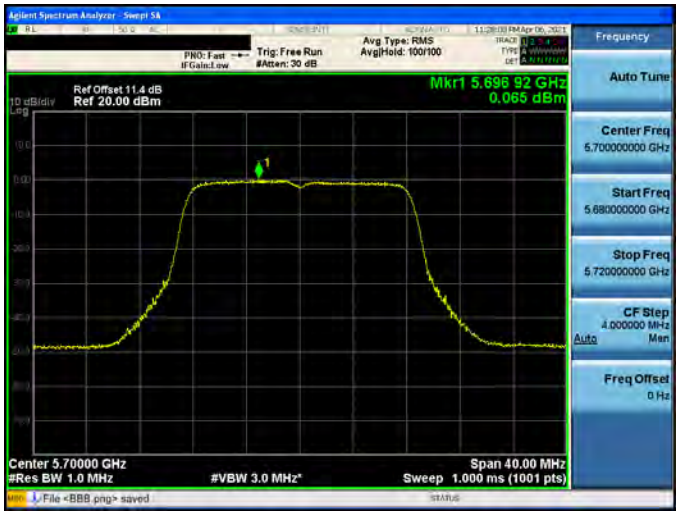
Mode 10: IEEE 802.11a Continuous TX Mode_ANT-3	
5500 MHz	
5560 MHz	
5700 MHz	

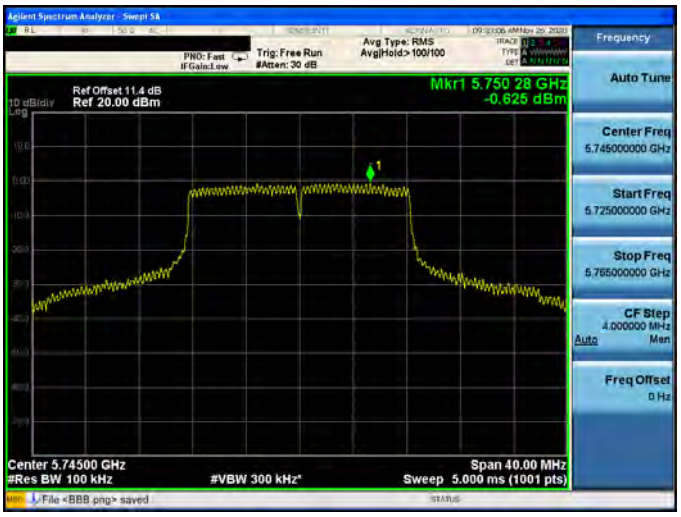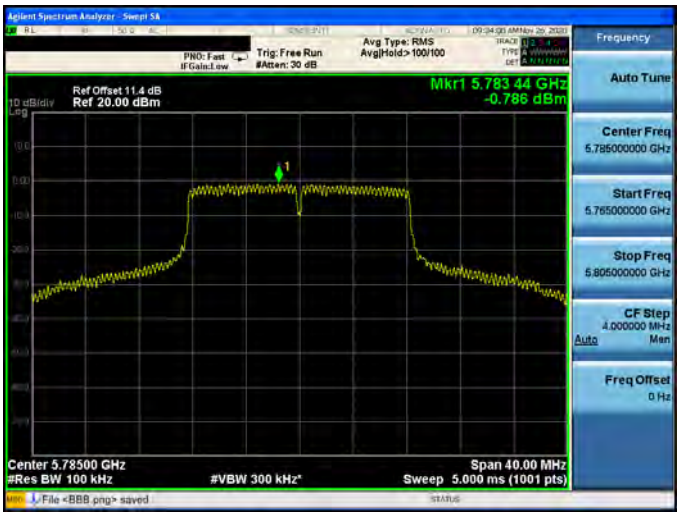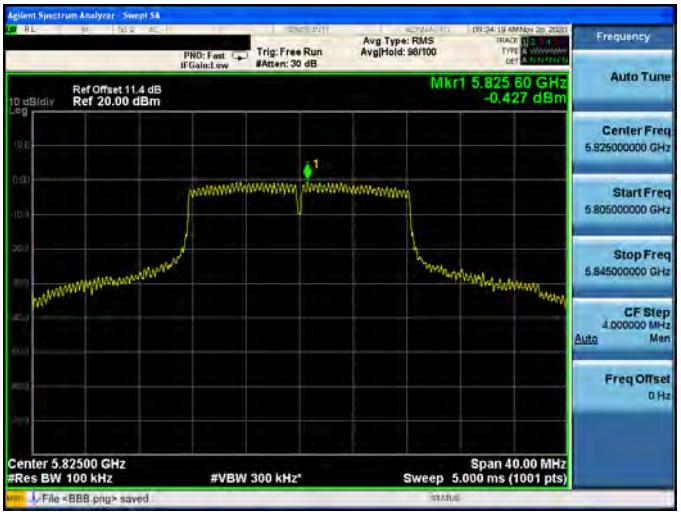
Mode 10: IEEE 802.11a Continuous TX Mode_ANT-3	
5745 MHz	
5785 MHz	
5825 MHz	

Mode 13: IEEE 802.11ac 20 MHz Continuous TX Mode_ANT-3	
5180 MHz	
5200 MHz	
5240 MHz	

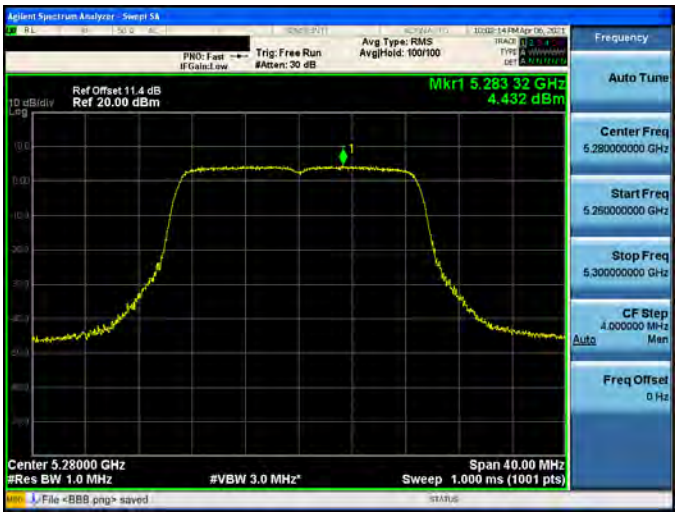Mode 13: IEEE 802.11ac 20 MHz Continuous TX Mode_ANT-3	
5260 MHz	
5280 MHz	
5320 MHz	

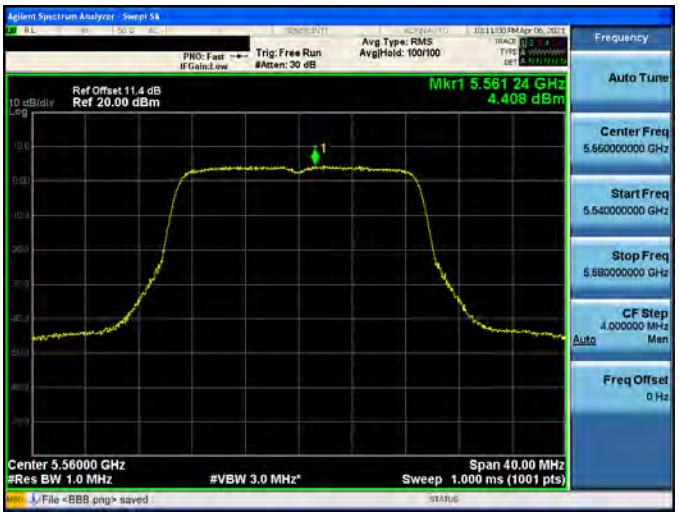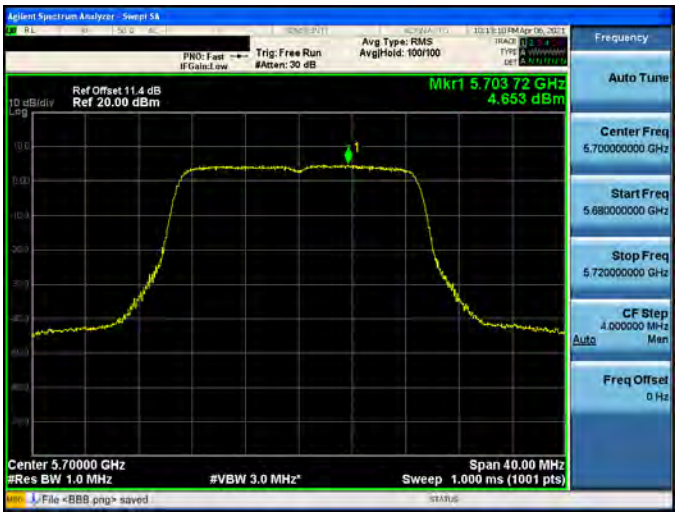
Mode 13: IEEE 802.11ac 20 MHz Continuous TX Mode_ANT-3	
5500 MHz	
5560 MHz	
5700 MHz	

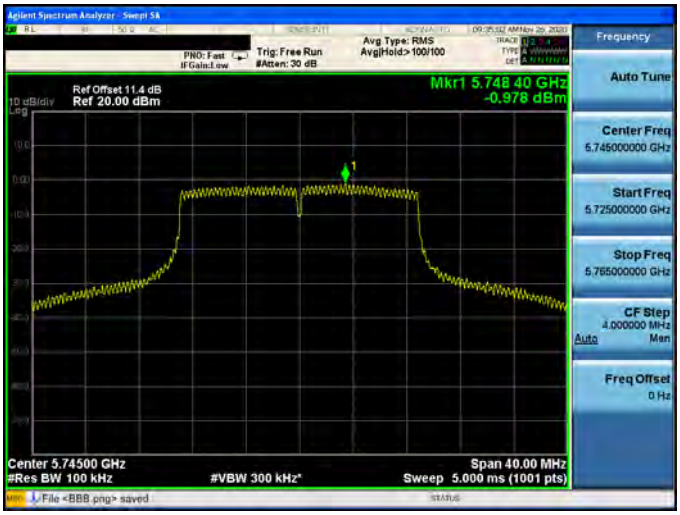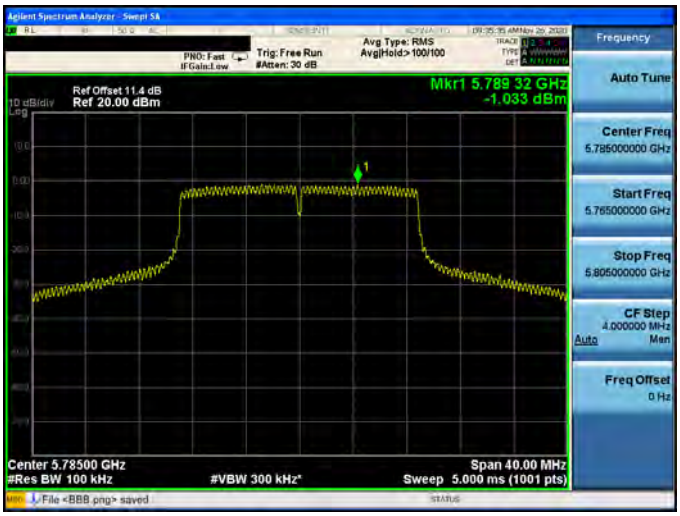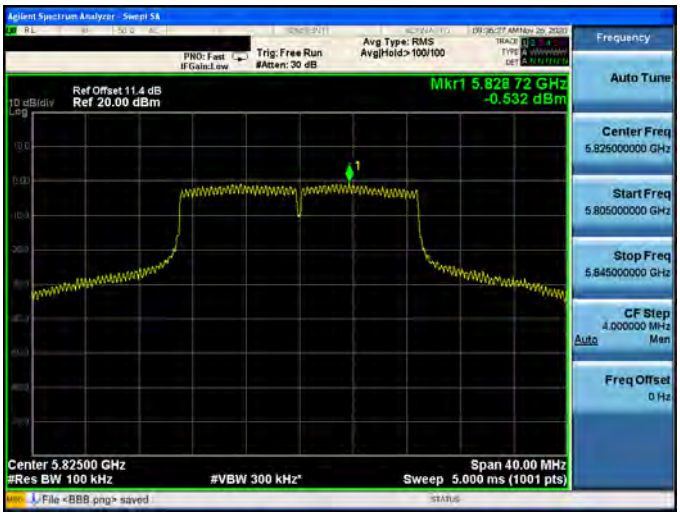Mode 13: IEEE 802.11ac 20 MHz Continuous TX Mode_ANT-3	
5745 MHz	
5785 MHz	
5825 MHz	

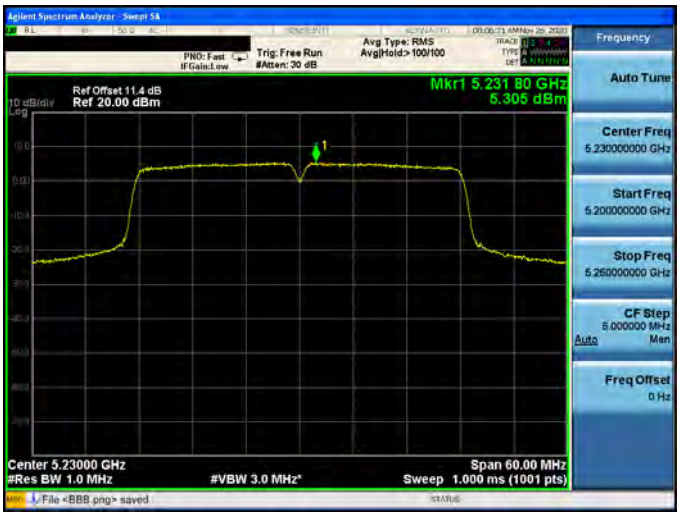Mode 14: IEEE 802.11ac 40 MHz Continuous TX Mode_ANT-3	
5190 MHz	
5230 MHz	

Mode 14: IEEE 802.11ac 40 MHz Continuous TX Mode_ANT-3	
5270 MHz	
5310 MHz	
5510 MHz	


Mode 14: IEEE 802.11ac 40 MHz Continuous TX Mode_ANT-3	
5550 MHz	
5670 MHz	



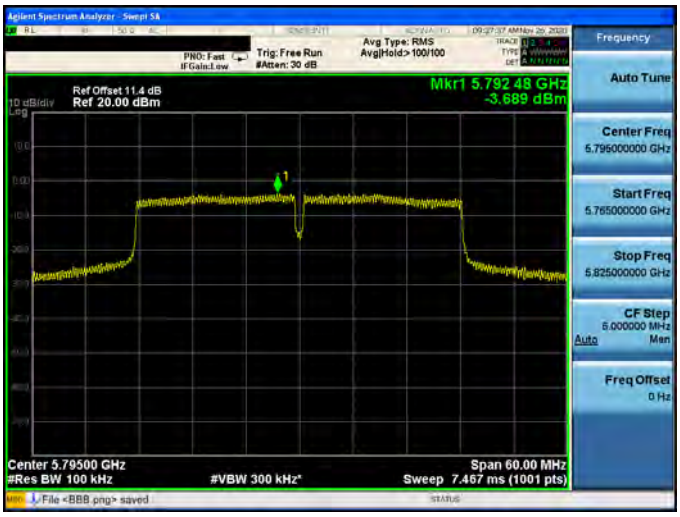
Mode 14: IEEE 802.11ac 40 MHz Continuous TX Mode_ANT-3	
5755 MHz	
5795 MHz	

Mode 15: IEEE 802.11ac 80 MHz Continuous TX Mode_ANT-3	
5210 MHz	
5290 MHz	
5530 MHz	

Mode 15: IEEE 802.11ac 80 MHz Continuous TX Mode_ANT-3	
5775 MHz	

Mode 16: IEEE 802.11ax 20 MHz Continuous TX Mode_ANT-3	
5180 MHz	
5200 MHz	
5240 MHz	

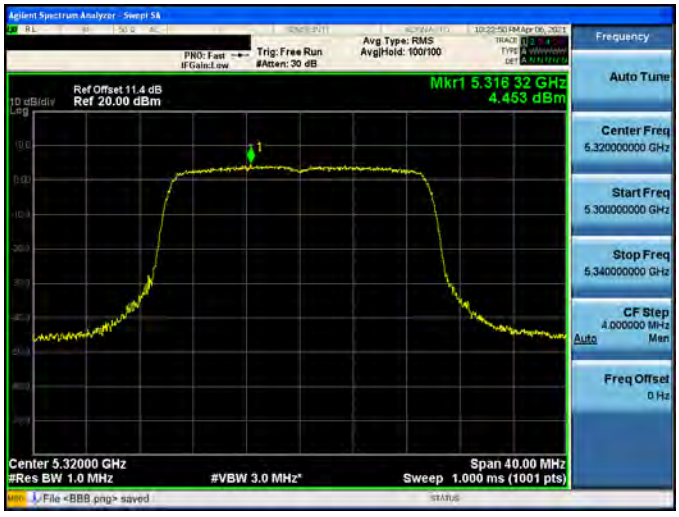
Mode 16: IEEE 802.11ax 20 MHz Continuous TX Mode_ANT-3	
5260 MHz	
5280 MHz	
5320 MHz	

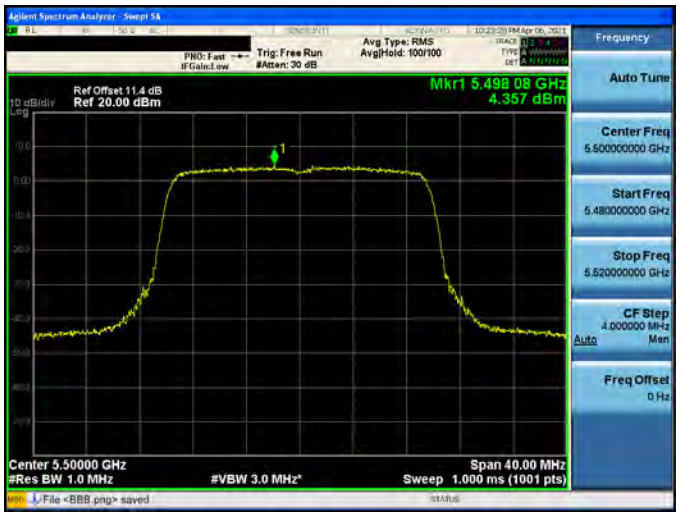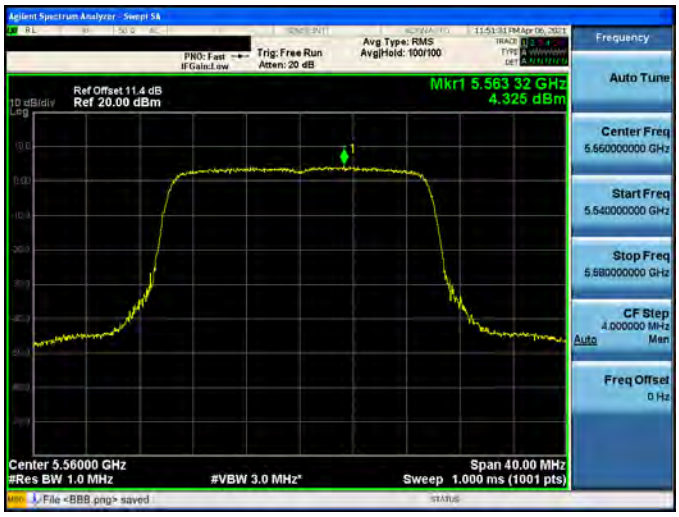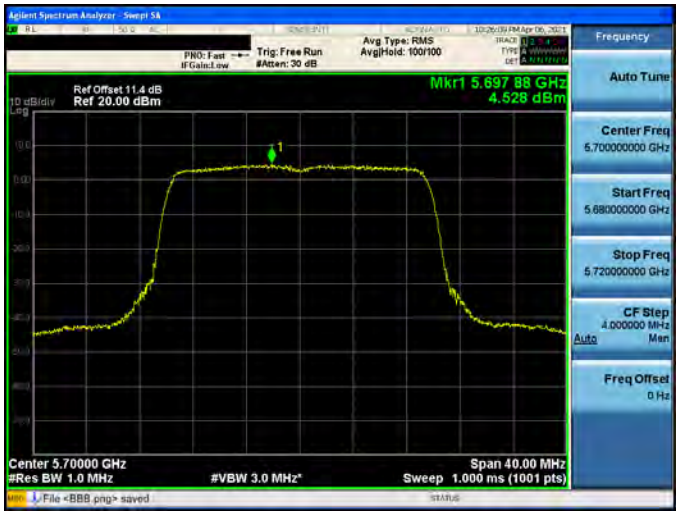Mode 16: IEEE 802.11ax 20 MHz Continuous TX Mode_ANT-3	
5500 MHz	
5560 MHz	
5700 MHz	

Mode 16: IEEE 802.11ax 20 MHz Continuous TX Mode_ANT-3	
5745 MHz	
5785 MHz	
5825 MHz	

Mode 17: IEEE 802.11ax 40 MHz Continuous TX Mode_ANT-3	
5190 MHz	
5230 MHz	

Mode 17: IEEE 802.11ax 40 MHz Continuous TX Mode_ANT-3	
5270 MHz	
5310 MHz	



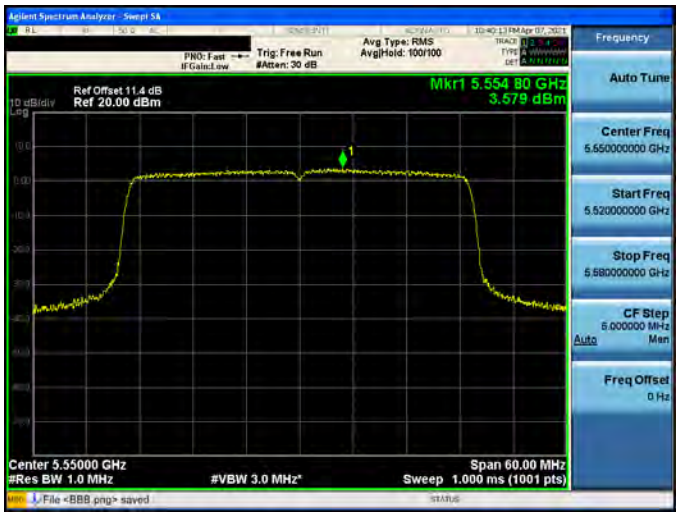
Mode 17: IEEE 802.11ax 40 MHz Continuous TX Mode_ANT-3	
5510 MHz	
5550 MHz	
5670 MHz	




Mode 17: IEEE 802.11ax 40 MHz Continuous TX Mode_ANT-3	
5755 MHz	
5795 MHz	




Mode 18: IEEE 802.11ax 80 MHz Continuous TX Mode_ANT-3	
5210 MHz	
5290 MHz	



Mode 18: IEEE 802.11ax 80 MHz Continuous TX Mode_ANT-3	
5530 MHz	
5775 MHz	

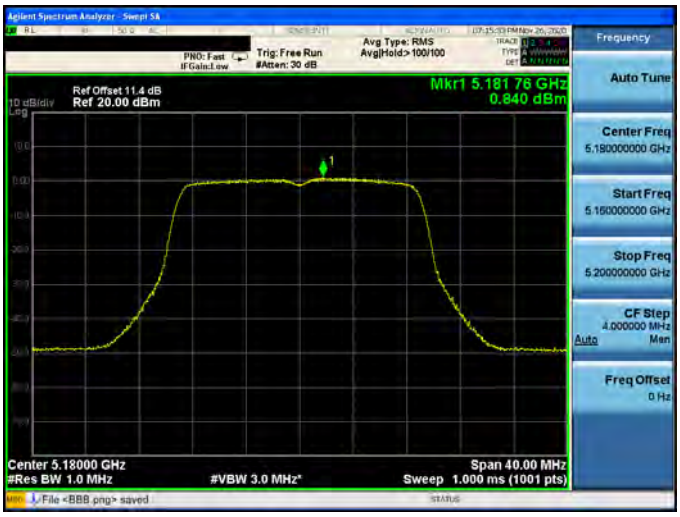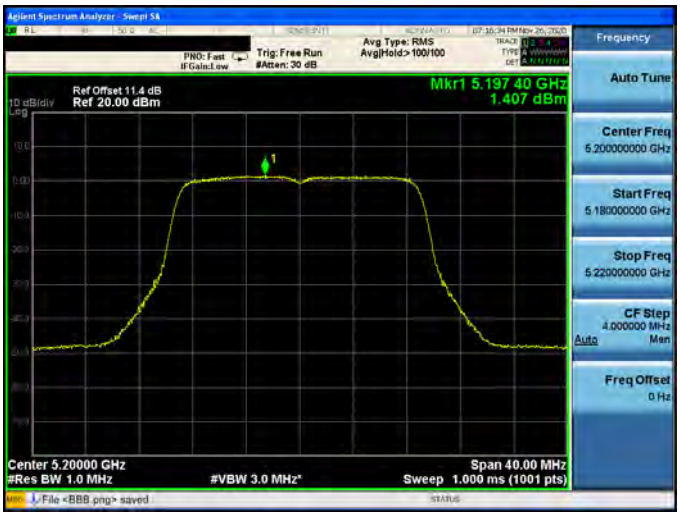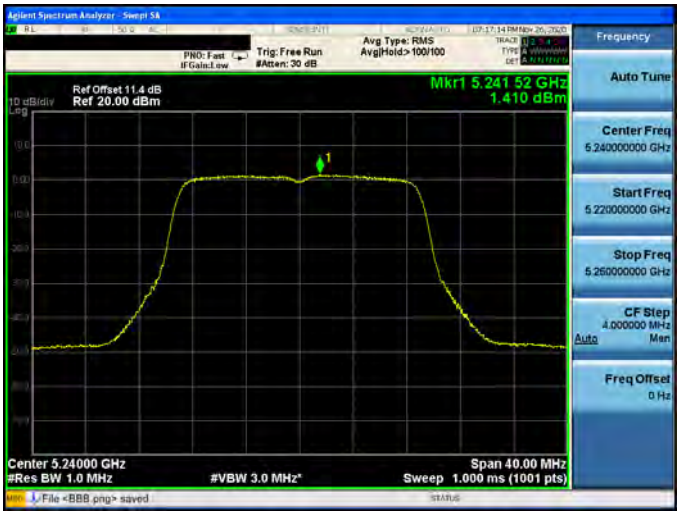Beamforming on




Mode 13: IEEE 802.11ac 20 MHz Continuous TX Mode_ANT-0	
5180 MHz	
5200 MHz	
5240 MHz	

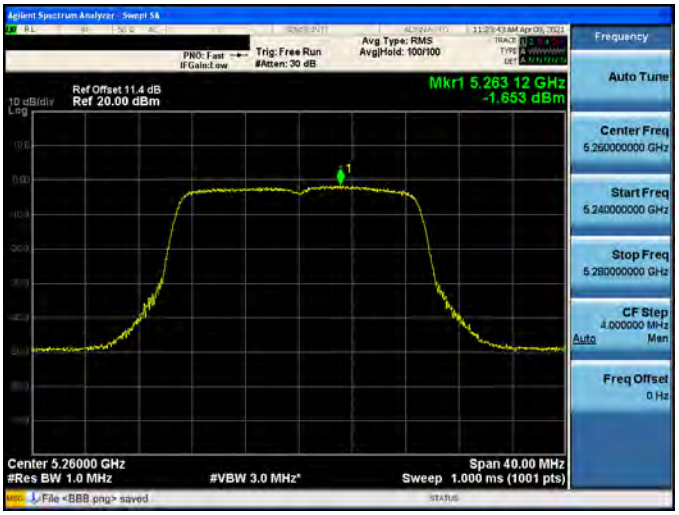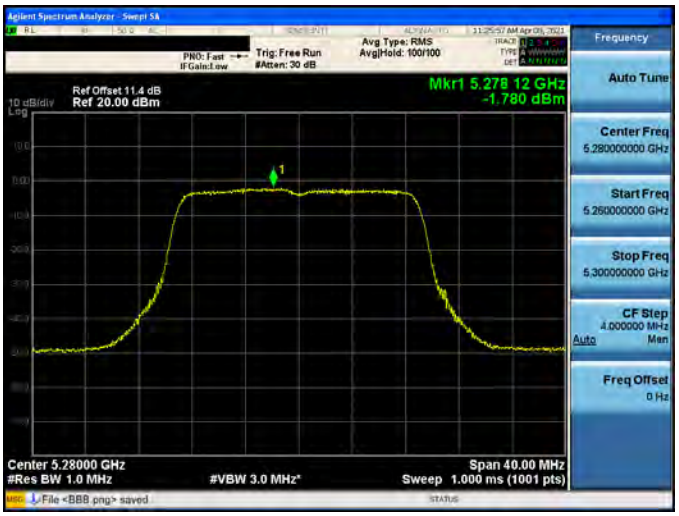
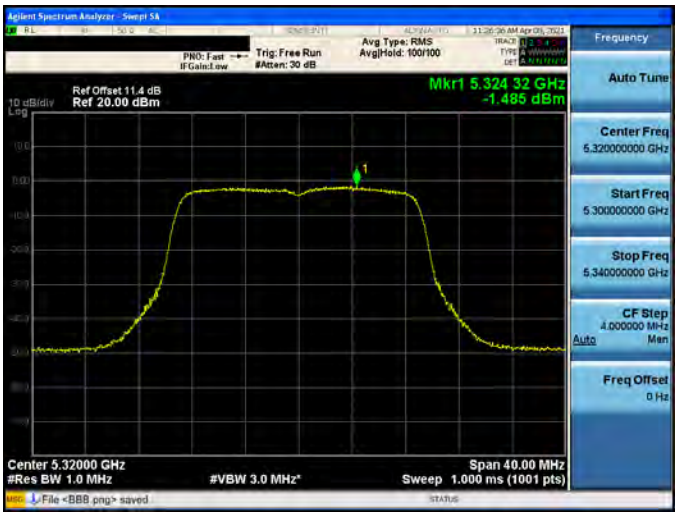
Mode 13: IEEE 802.11ac 20 MHz Continuous TX Mode_ANT-0	
5260 MHz	
5280 MHz	
5320 MHz	

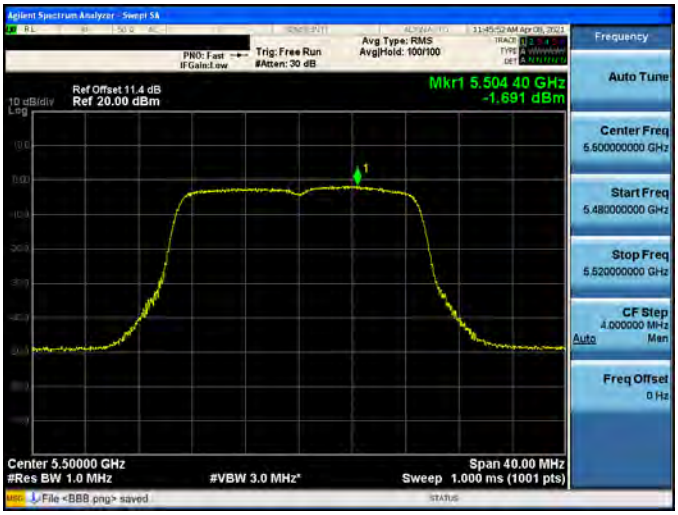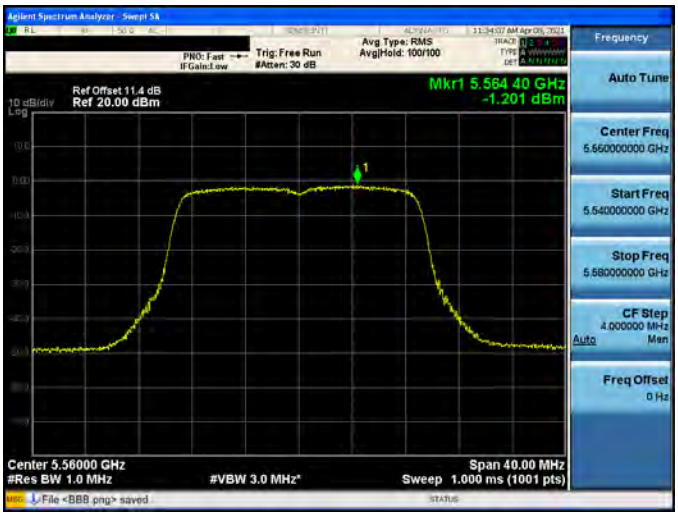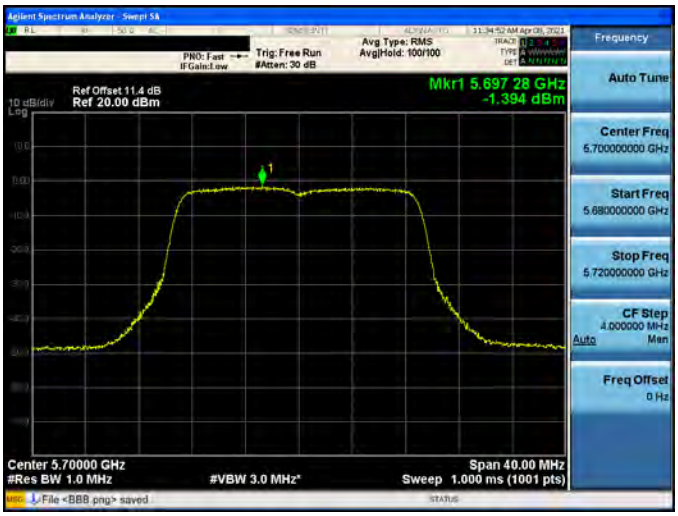
Mode 13: IEEE 802.11ac 20 MHz Continuous TX Mode_ANT-0	
5500 MHz	
5560 MHz	
5700 MHz	

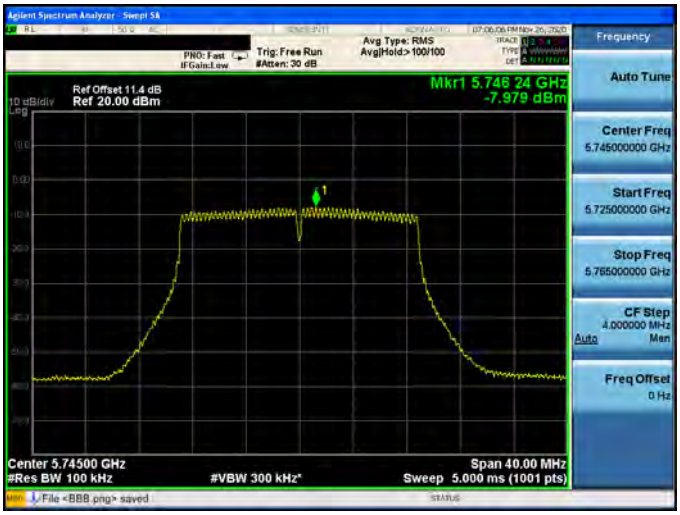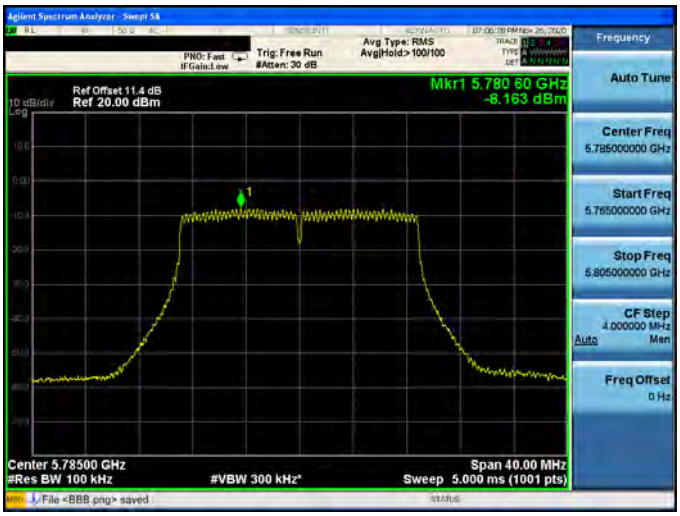
Mode 13: IEEE 802.11ac 20 MHz Continuous TX Mode_ANT-0	
5745 MHz	
5785 MHz	
5825 MHz	

Mode 14: IEEE 802.11ac 40 MHz Continuous TX Mode_ANT-0	
5190 MHz	
5230 MHz	

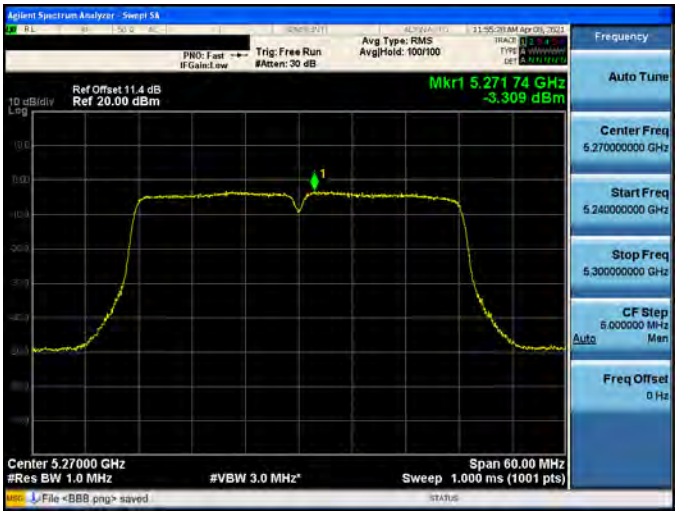
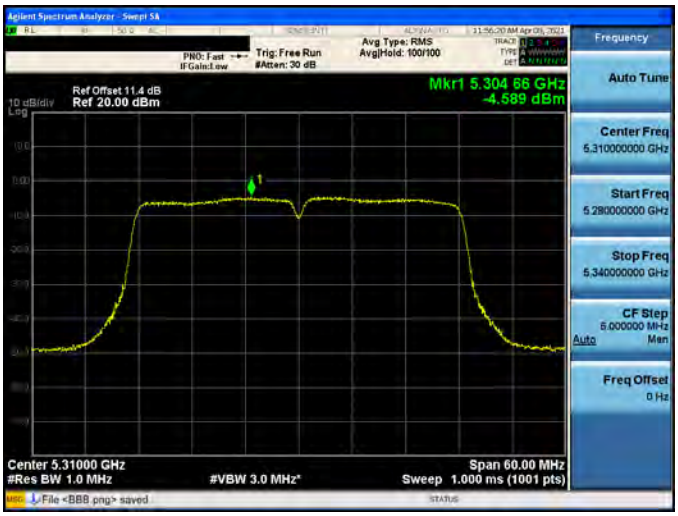
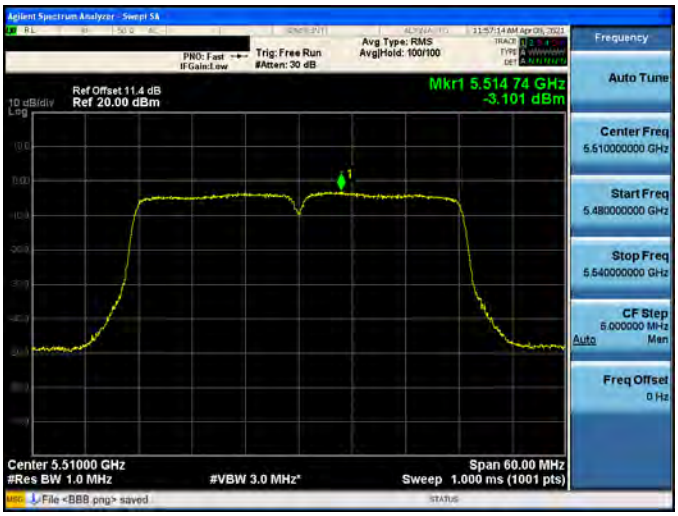
Mode 14: IEEE 802.11ac 40 MHz Continuous TX Mode_ANT-0	
5270 MHz	
5310 MHz	
5510 MHz	


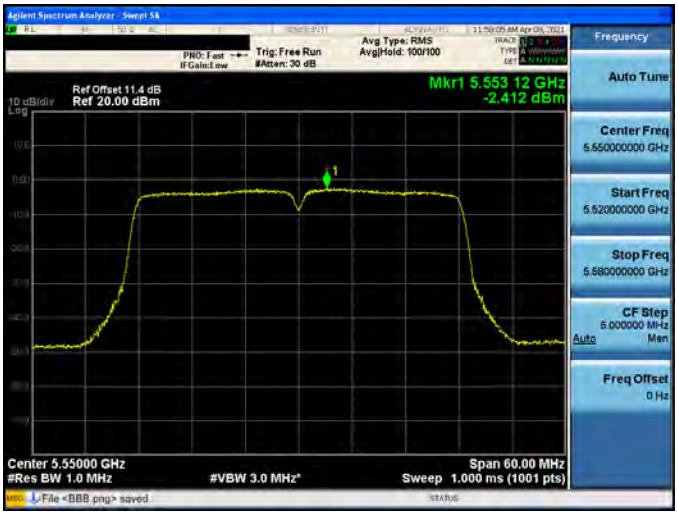
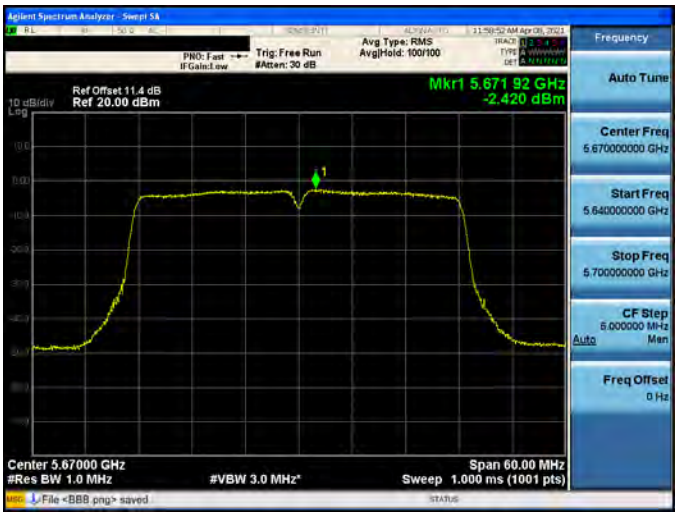
Mode 14: IEEE 802.11ac 40 MHz Continuous TX Mode_ANT-0	
5550 MHz	
5670 MHz	



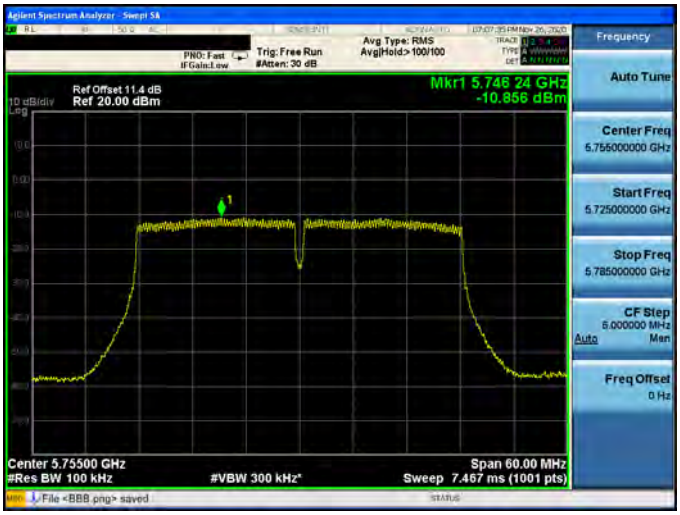
Mode 14: IEEE 802.11ac 40 MHz Continuous TX Mode_ANT-0	
5755 MHz	
5795 MHz	

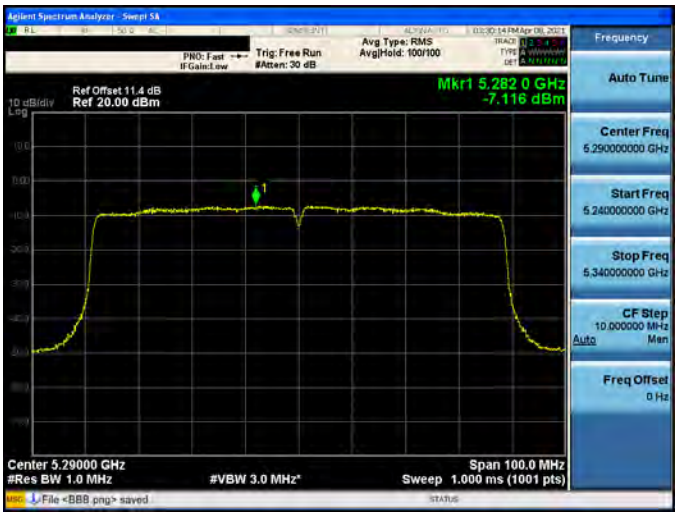Mode 15: IEEE 802.11ac 80 MHz Continuous TX Mode_ANT-0	
5210 MHz	
5290 MHz	
5530 MHz	

Mode 15: IEEE 802.11ac 80 MHz Continuous TX Mode_ANT-0	
5775 MHz	

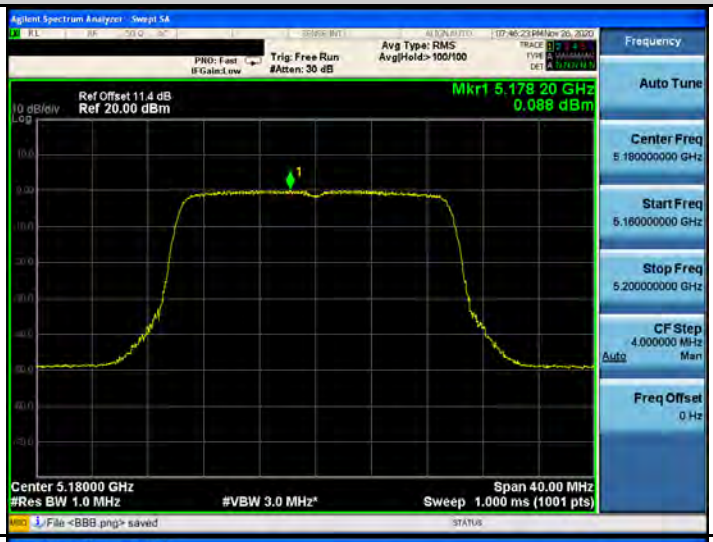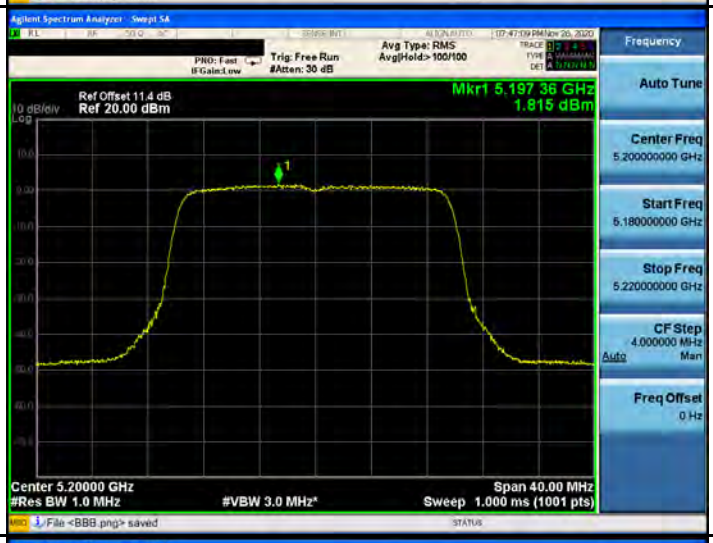
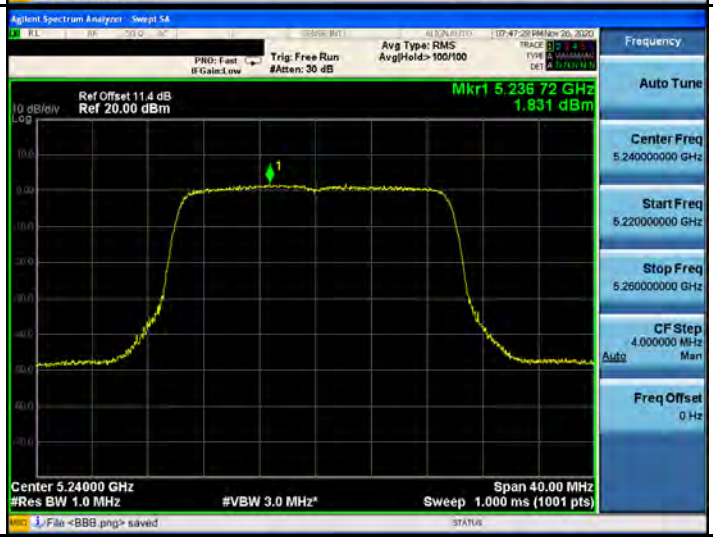
Mode 16: IEEE 802.11ax 20 MHz Continuous TX Mode_ANT-0		
5180 MHz		
5200 MHz		
5240 MHz		

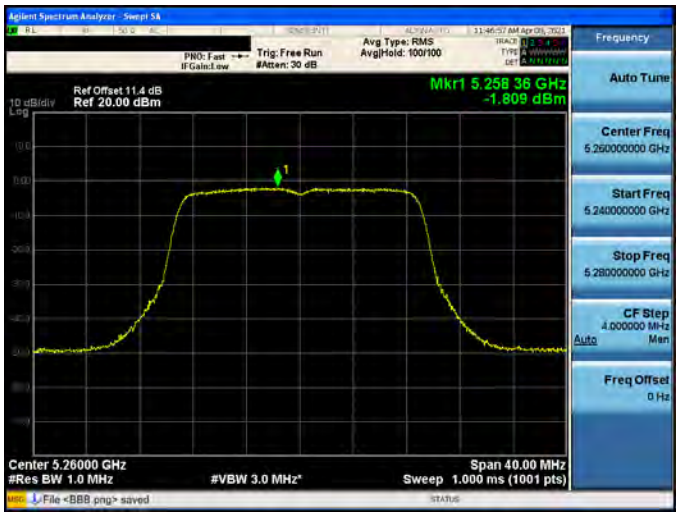
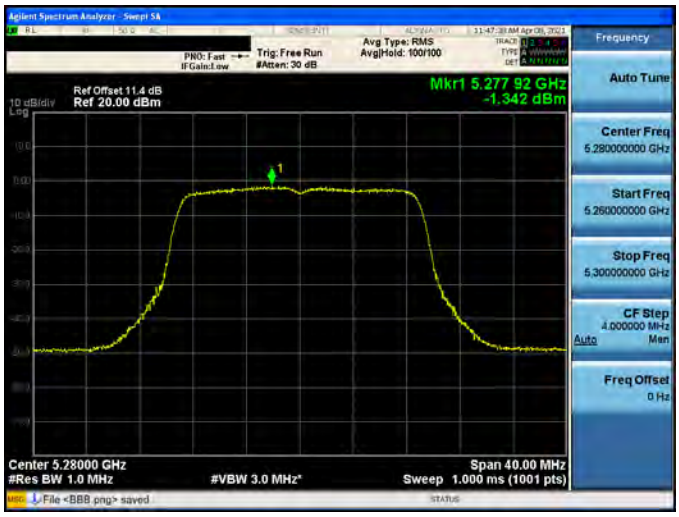
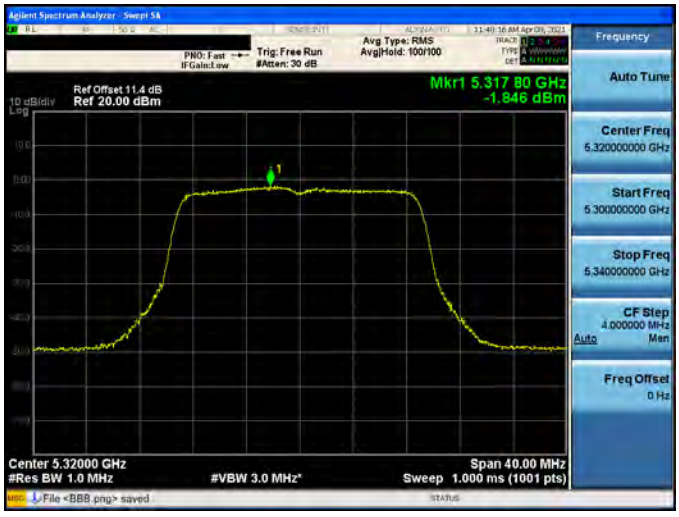
Mode 16: IEEE 802.11ax 20 MHz Continuous TX Mode_ANT-0	
5260 MHz	
5280 MHz	
5320 MHz	

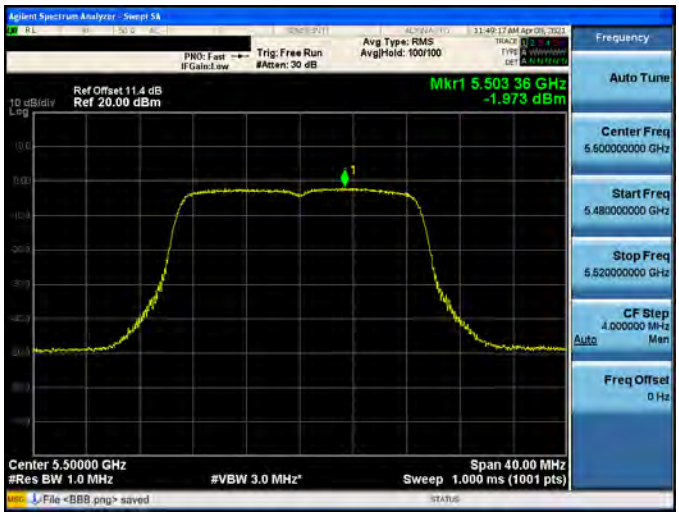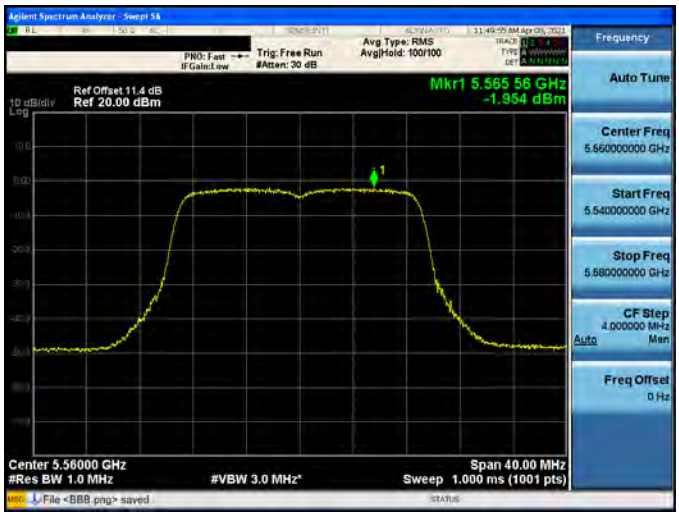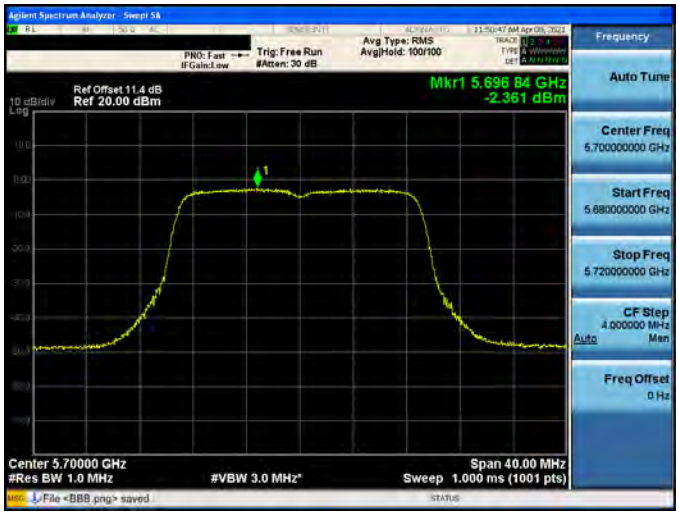Mode 16: IEEE 802.11ax 20 MHz Continuous TX Mode_ANT-0	
5500 MHz	
5560 MHz	
5700 MHz	

Mode 16: IEEE 802.11ax 20 MHz Continuous TX Mode_ANT-0	
5745 MHz	
5785 MHz	
5825 MHz	


Mode 17: IEEE 802.11ax 40 MHz Continuous TX Mode_ANT-0	
5190 MHz	
5230 MHz	


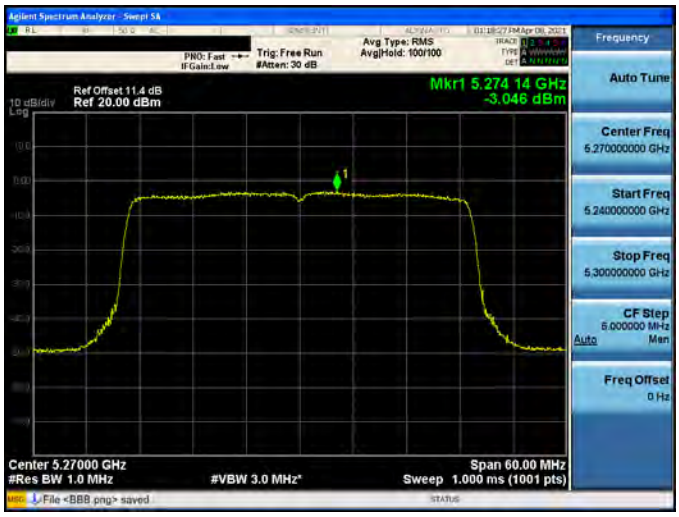
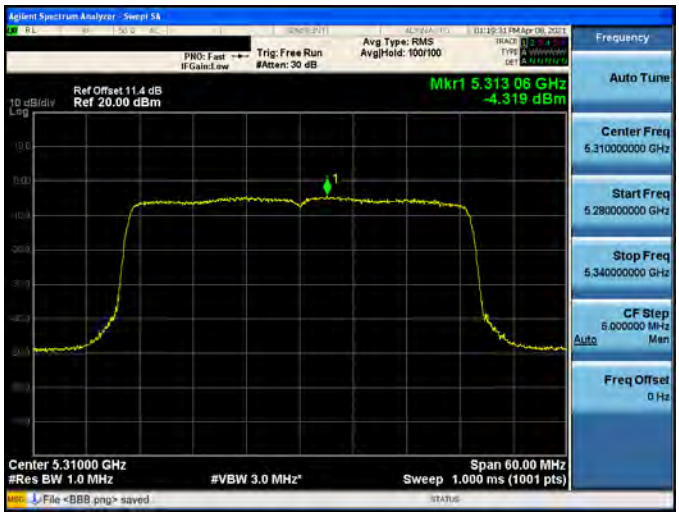
Mode 17: IEEE 802.11ax 40 MHz Continuous TX Mode_ANT-0	
5270 MHz	
5310 MHz	

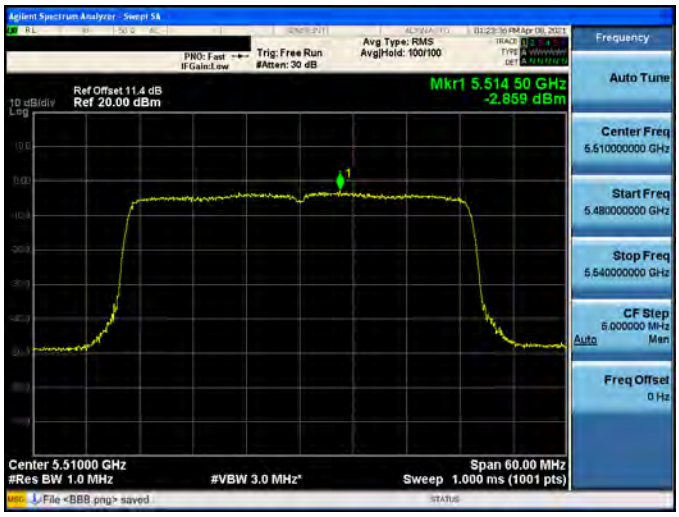
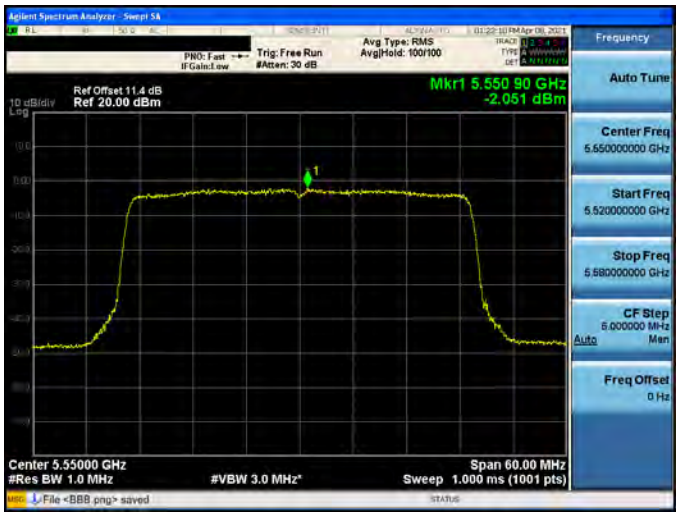
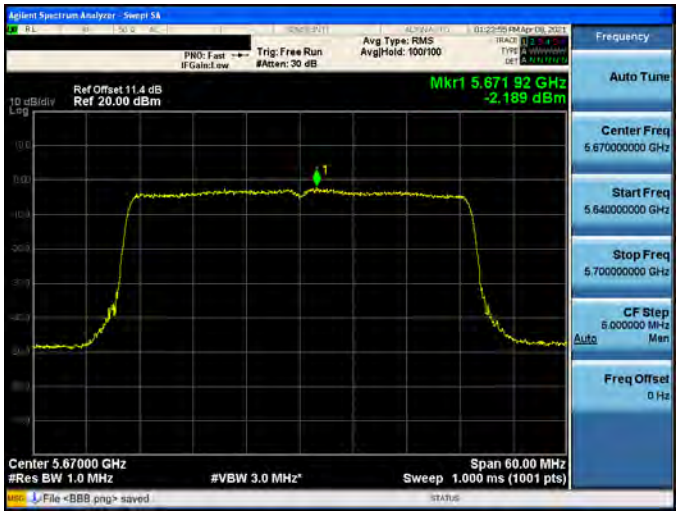
Mode 17: IEEE 802.11ax 40 MHz Continuous TX Mode_ANT-0	
5510 MHz	
5550 MHz	
5670 MHz	




Mode 17: IEEE 802.11ax 40 MHz Continuous TX Mode_ANT-0	
5755 MHz	
5795 MHz	




Mode 18: IEEE 802.11ax 80 MHz Continuous TX Mode_ANT-0	
5210 MHz	
5290 MHz	


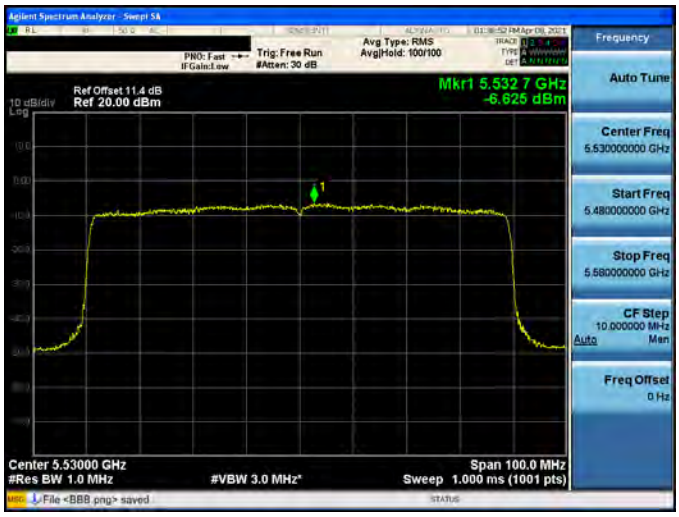
Mode 18: IEEE 802.11ax 80 MHz Continuous TX Mode_ANT-0	
5530 MHz	
5775 MHz	

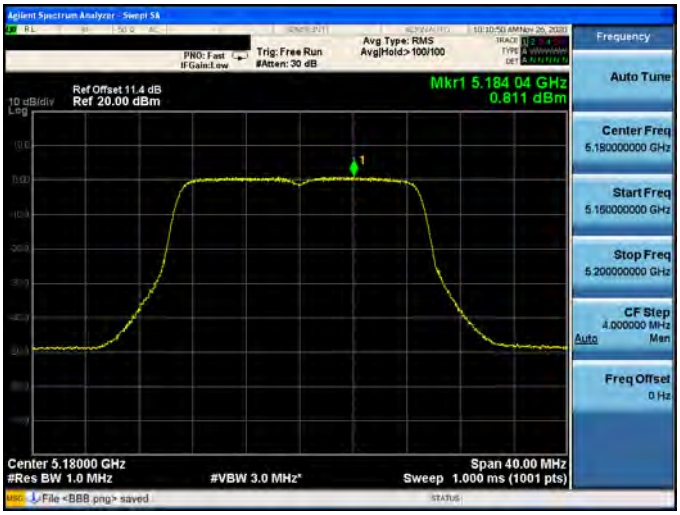
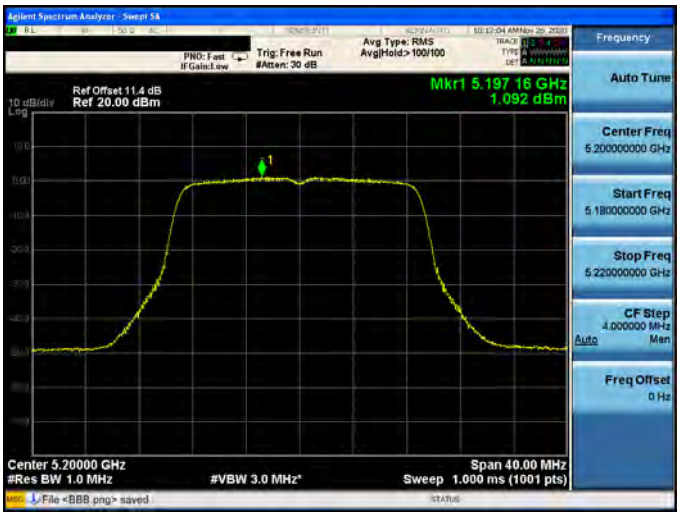
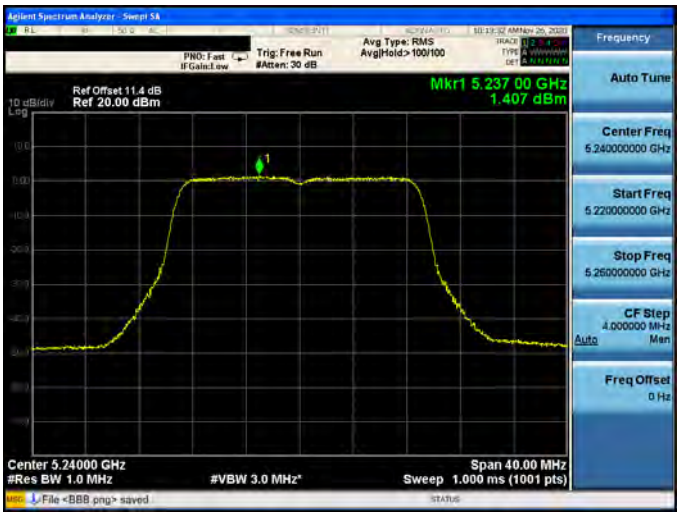
Mode 13: IEEE 802.11ac 20 MHz Continuous TX Mode_ANT-1	
5180 MHz	
5200 MHz	
5240 MHz	

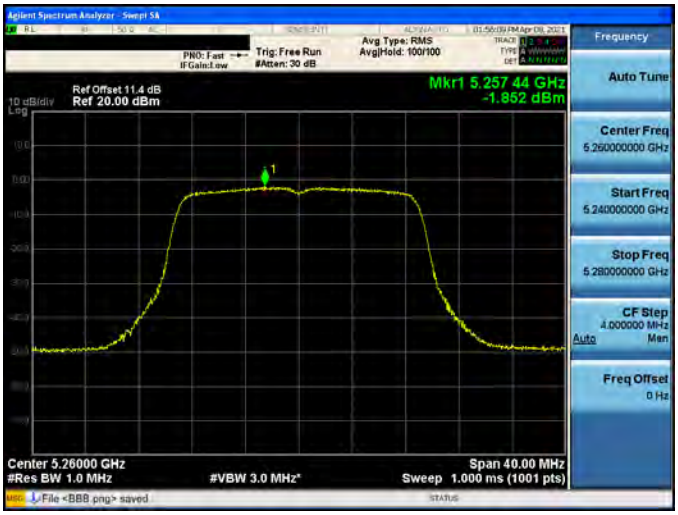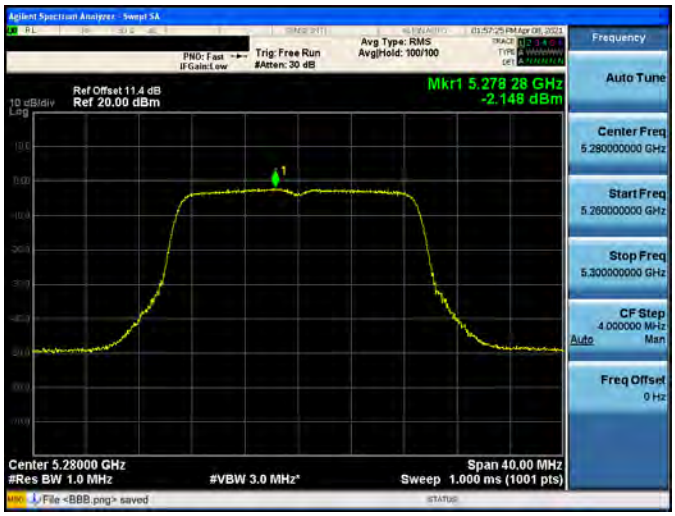
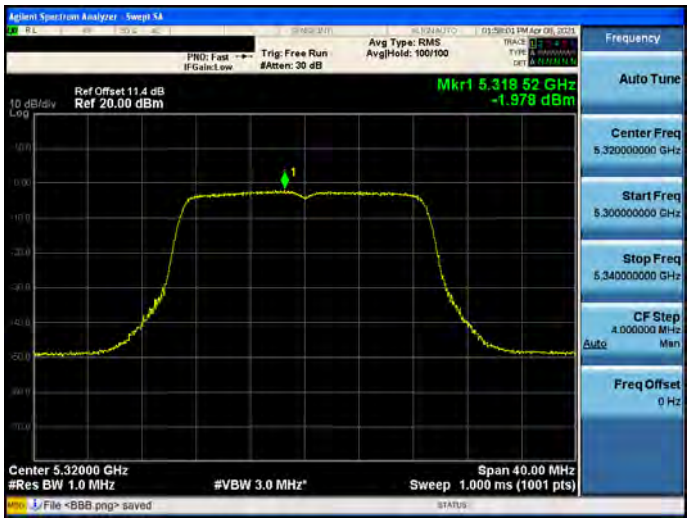
Mode 13: IEEE 802.11ac 20 MHz Continuous TX Mode_ANT-1	
5260 MHz	
5280 MHz	
5320 MHz	

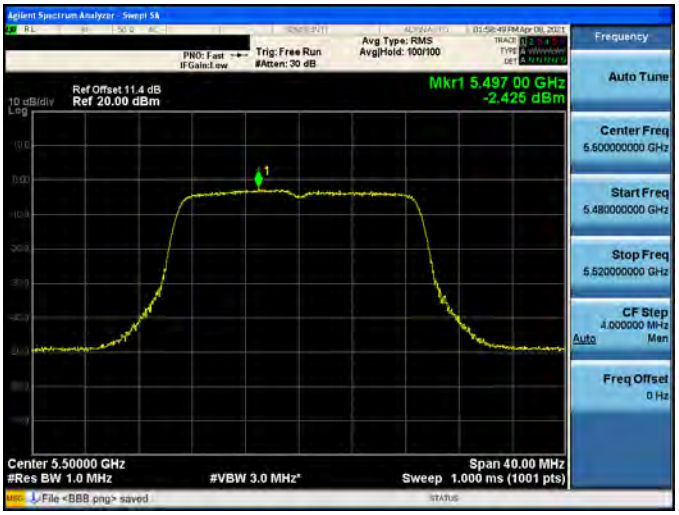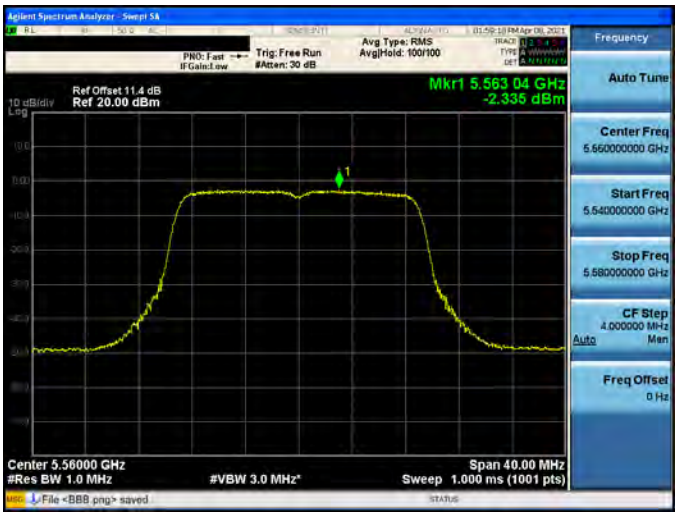
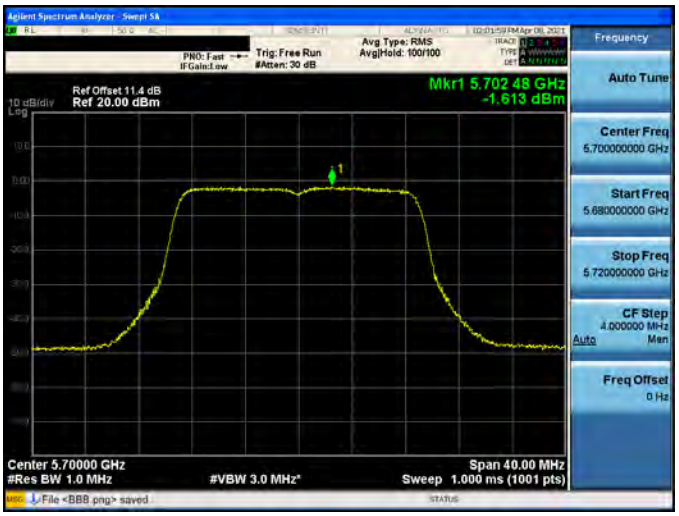
Mode 13: IEEE 802.11ac 20 MHz Continuous TX Mode_ANT-1	
5500 MHz	
5560 MHz	
5700 MHz	

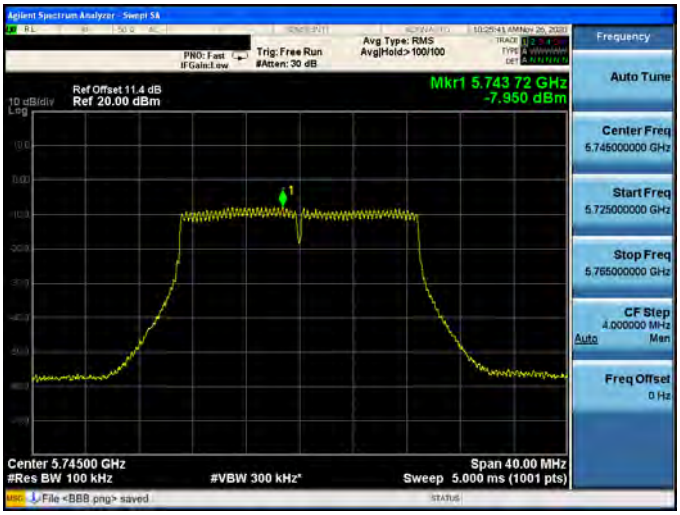
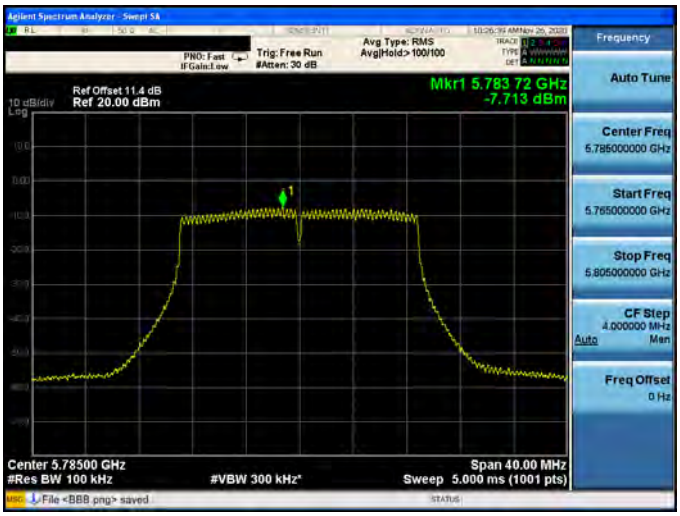
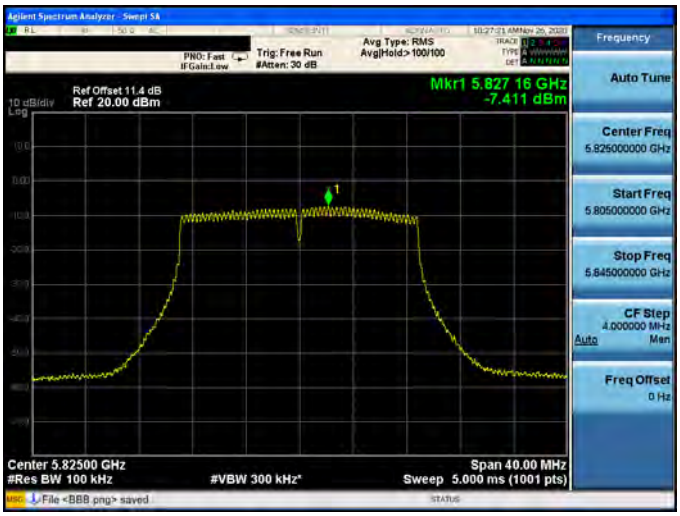
Mode 13: IEEE 802.11ac 20 MHz Continuous TX Mode_ANT-1	
5745 MHz	
5785 MHz	
5825 MHz	

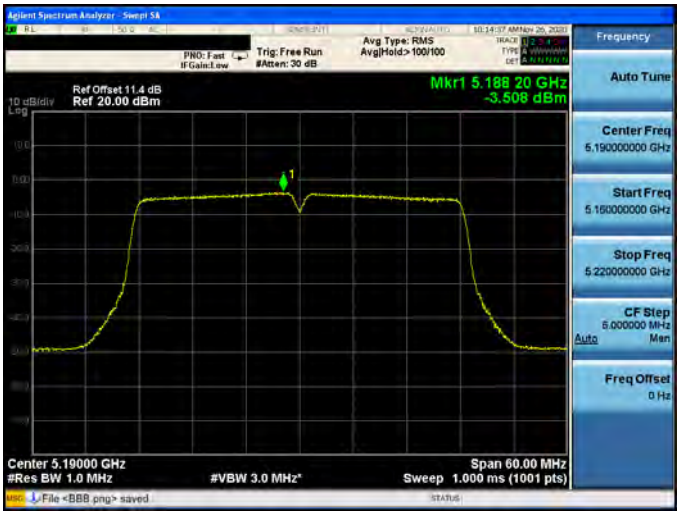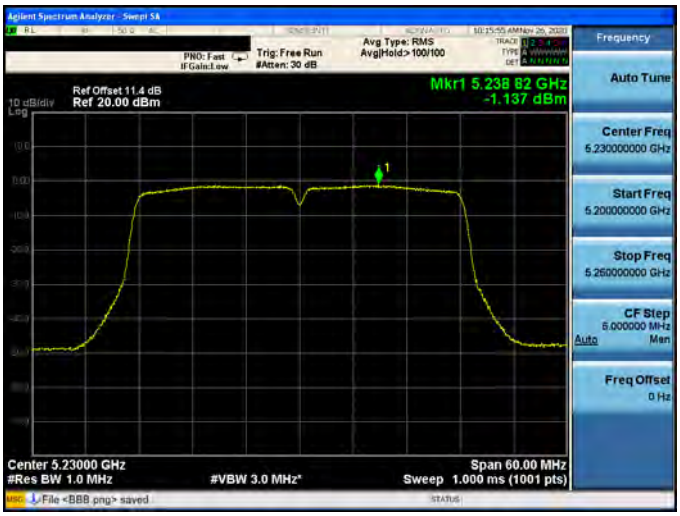
Mode 14: IEEE 802.11ac 40 MHz Continuous TX Mode_ANT-1	
5190 MHz	
5230 MHz	

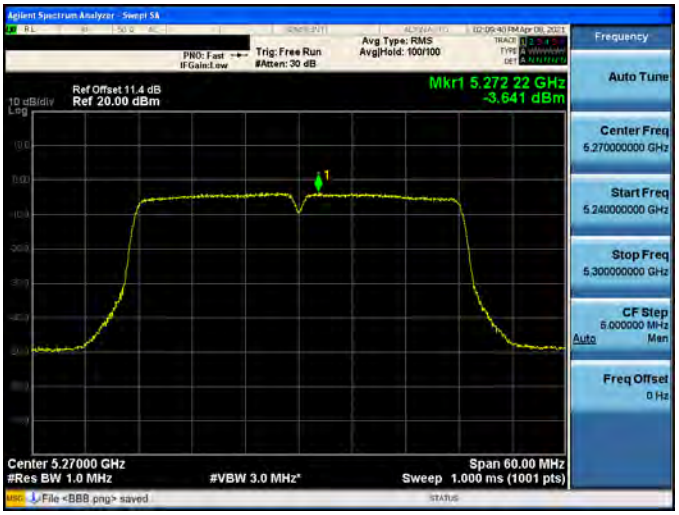
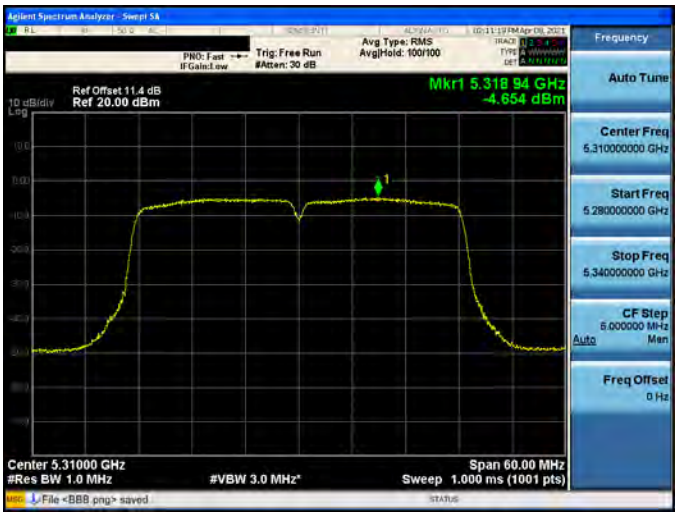
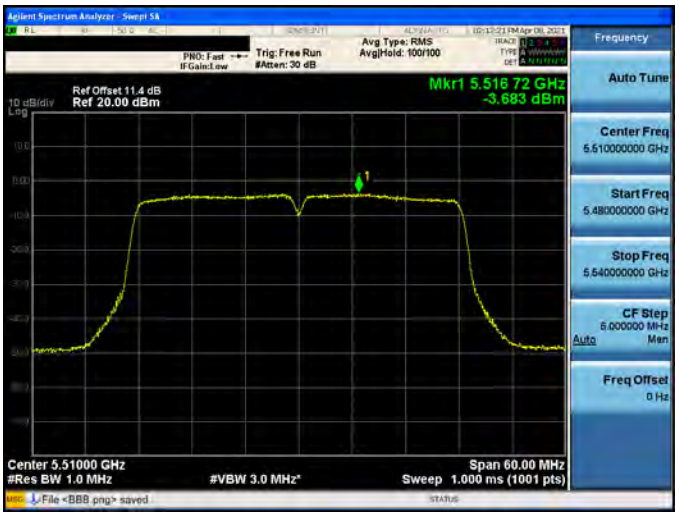
Mode 14: IEEE 802.11ac 40 MHz Continuous TX Mode_ANT-1	
5270 MHz	
5310 MHz	
5510 MHz	


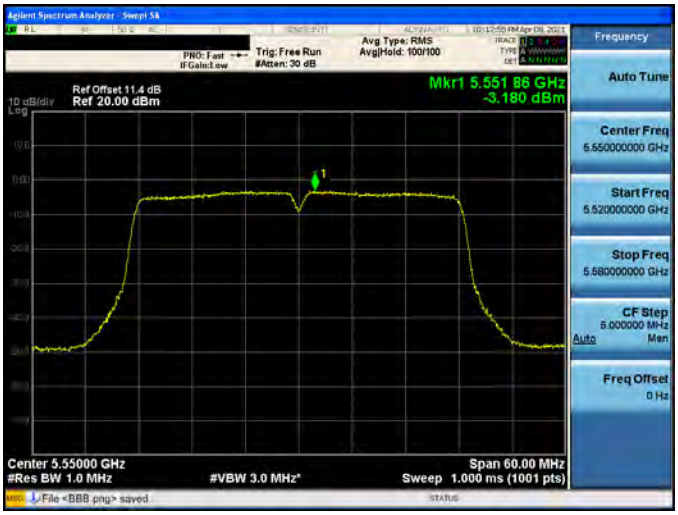
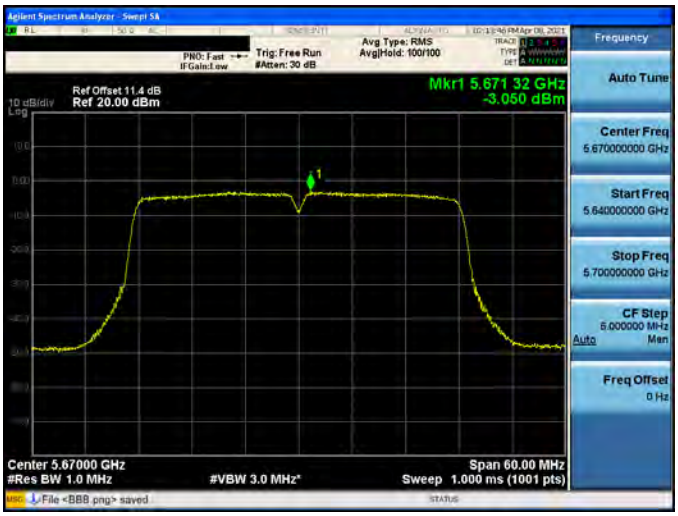
Mode 14: IEEE 802.11ac 40 MHz Continuous TX Mode_ANT-1	
5550 MHz	
5670 MHz	


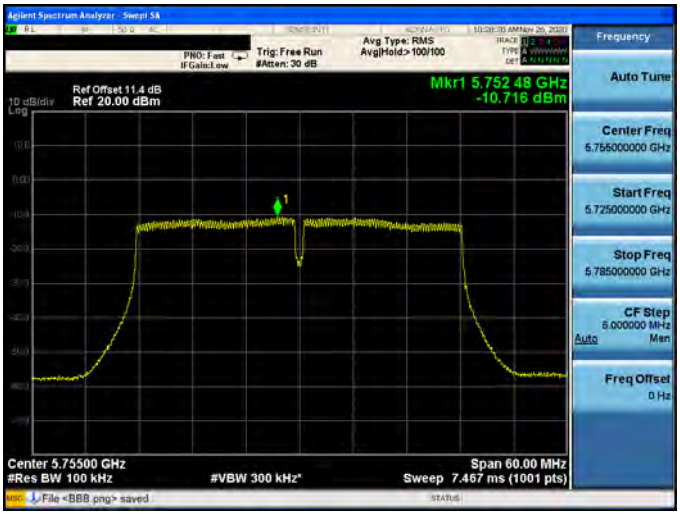
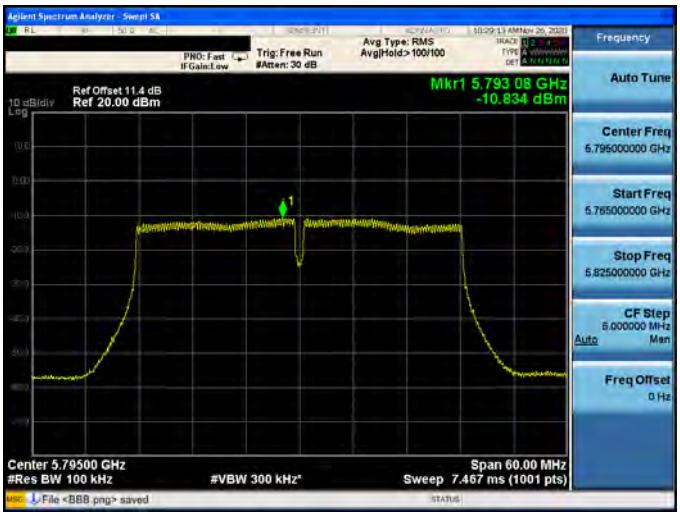
Mode 14: IEEE 802.11ac 40 MHz Continuous TX Mode_ANT-1	
5755 MHz	
5795 MHz	

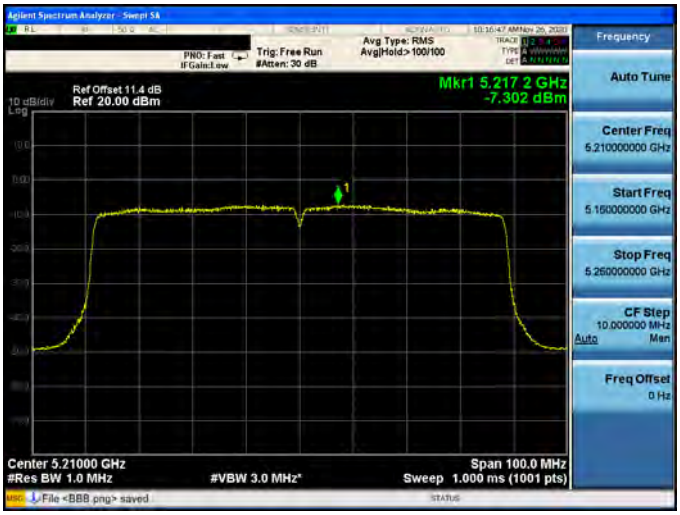
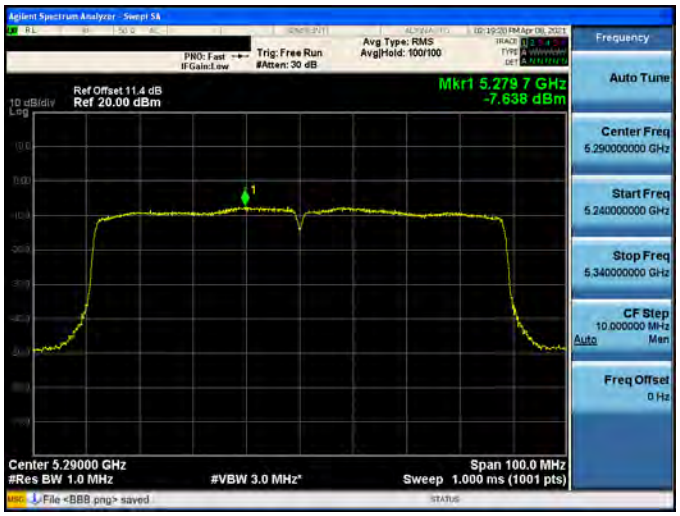
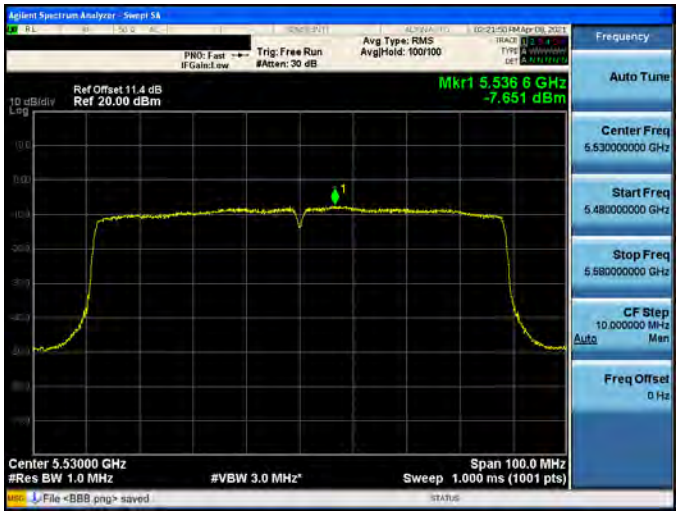
Mode 15: IEEE 802.11ac 80 MHz Continuous TX Mode_ANT-1	
5210 MHz	
5290 MHz	
5530 MHz	

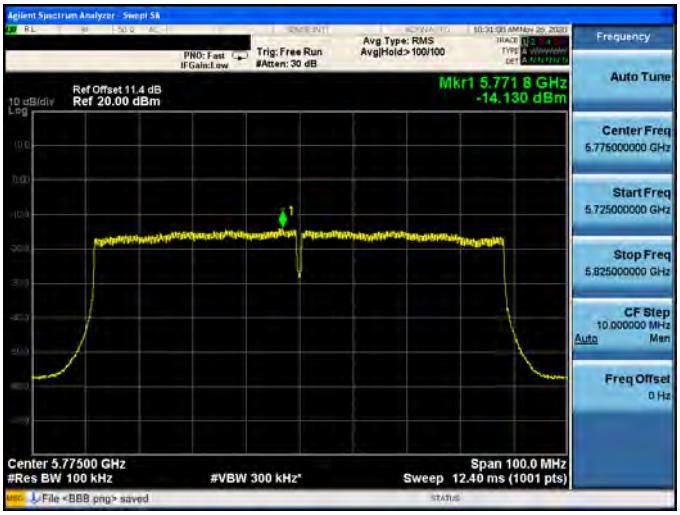
Mode 15: IEEE 802.11ac 80 MHz Continuous TX Mode_ANT-1	
5775 MHz	

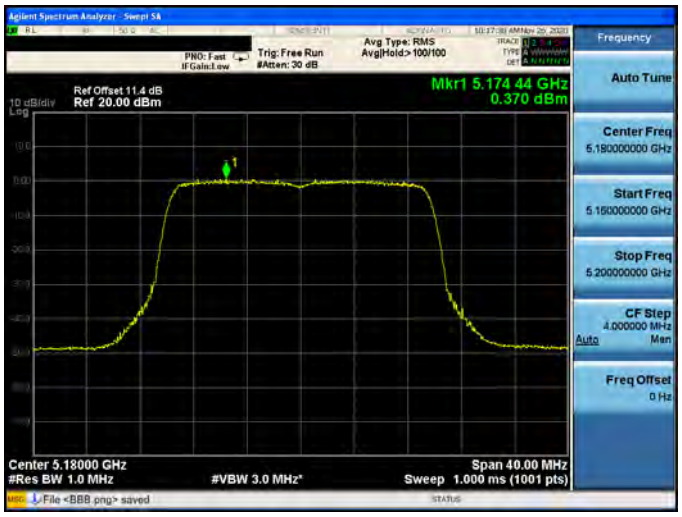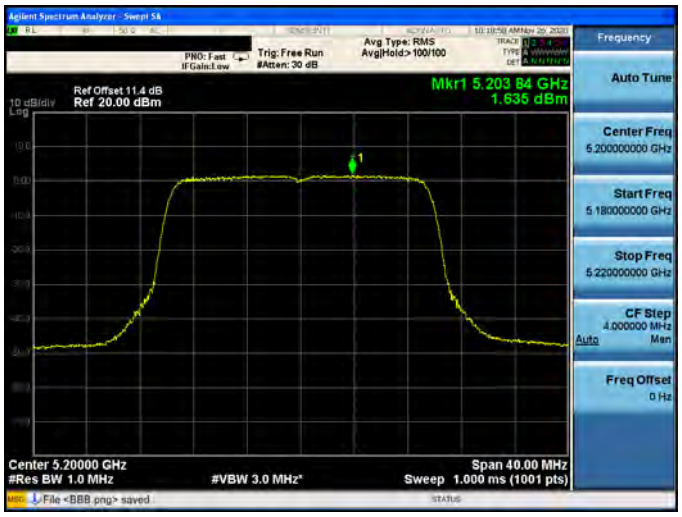
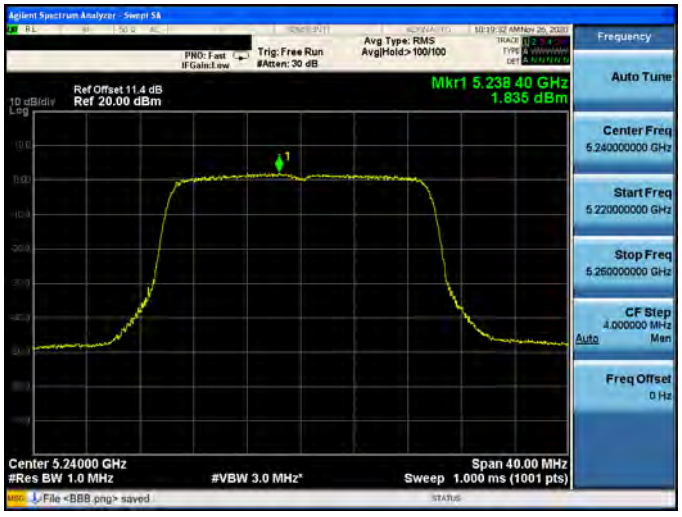
Mode 16: IEEE 802.11ax 20 MHz Continuous TX Mode_ANT-1	
5180 MHz	
5200 MHz	
5240 MHz	

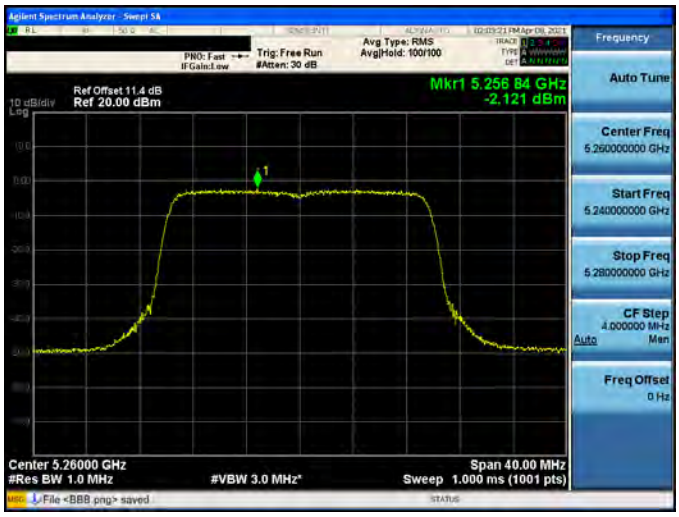
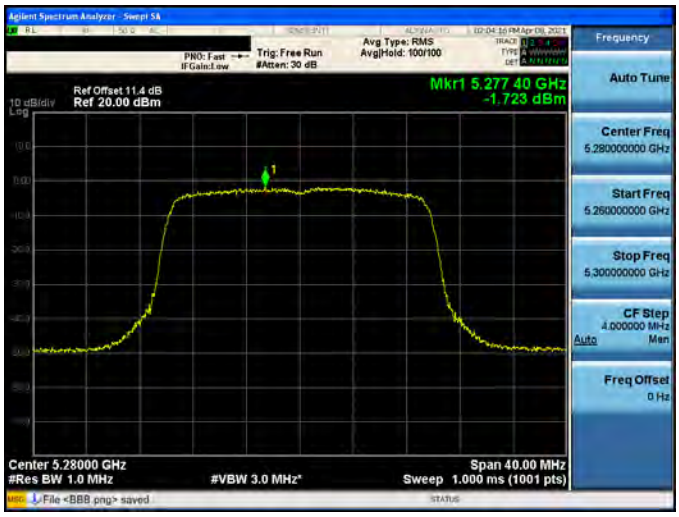
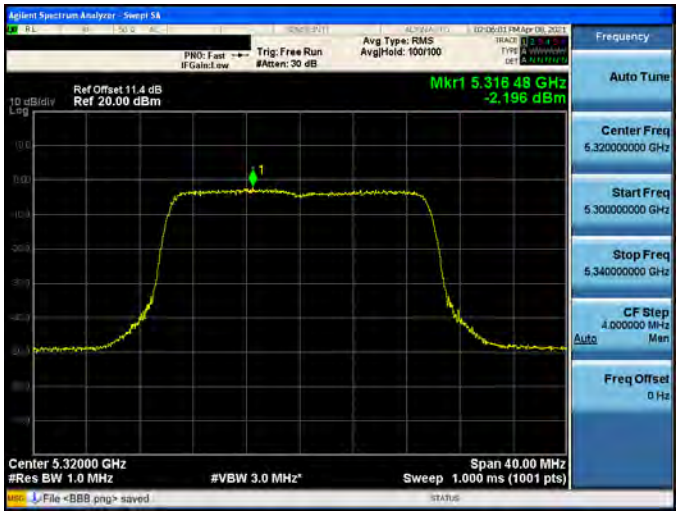
Mode 16: IEEE 802.11ax 20 MHz Continuous TX Mode_ANT-1	
5260 MHz	
5280 MHz	
5320 MHz	

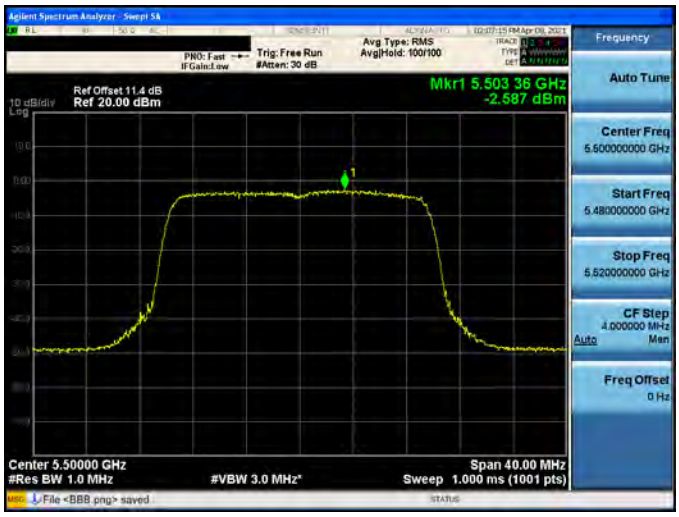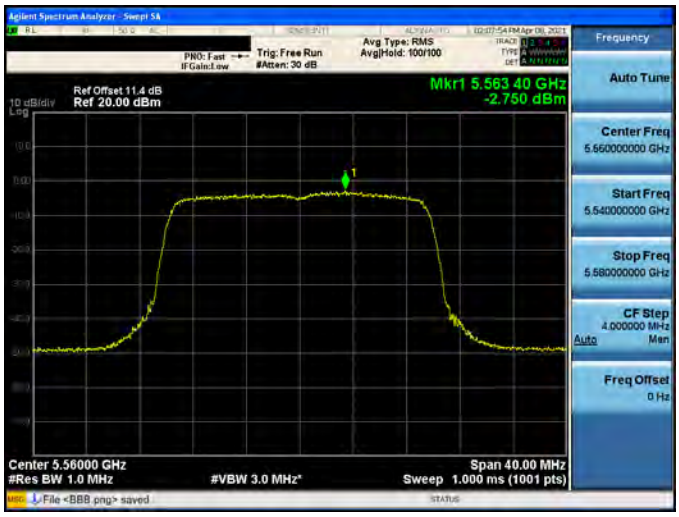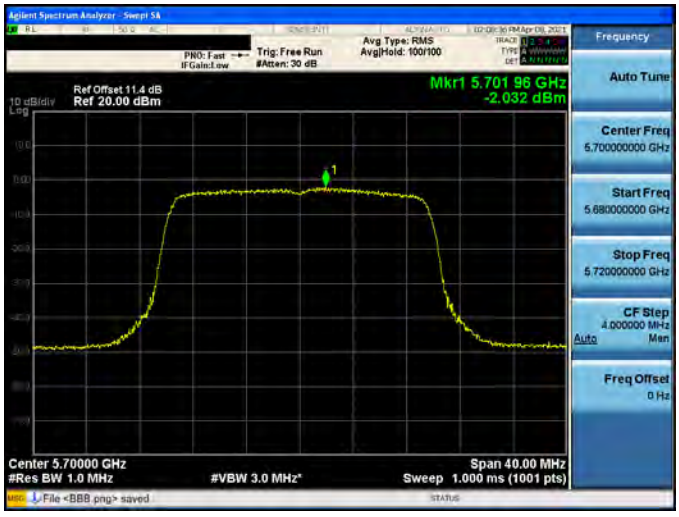Mode 16: IEEE 802.11ax 20 MHz Continuous TX Mode_ANT-1	
5500 MHz	
5560 MHz	
5700 MHz	

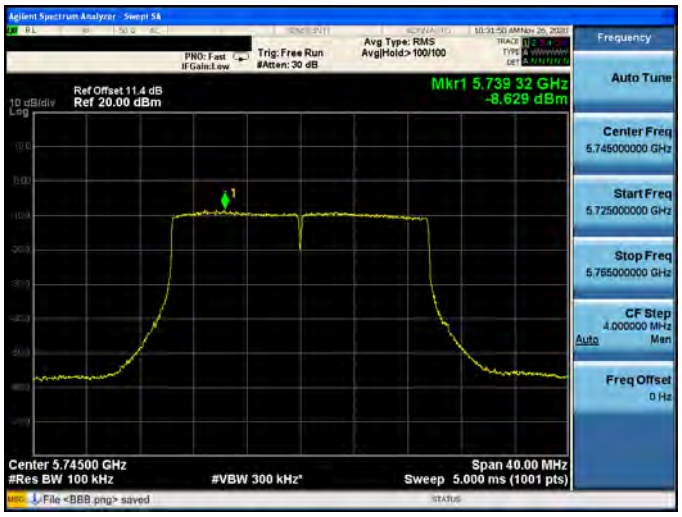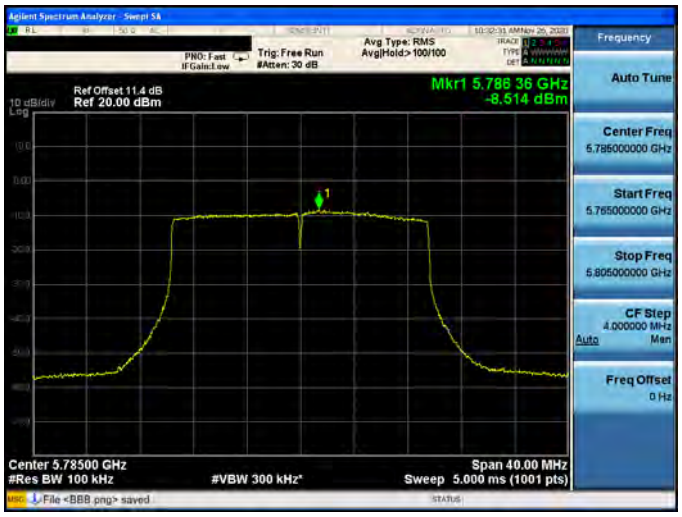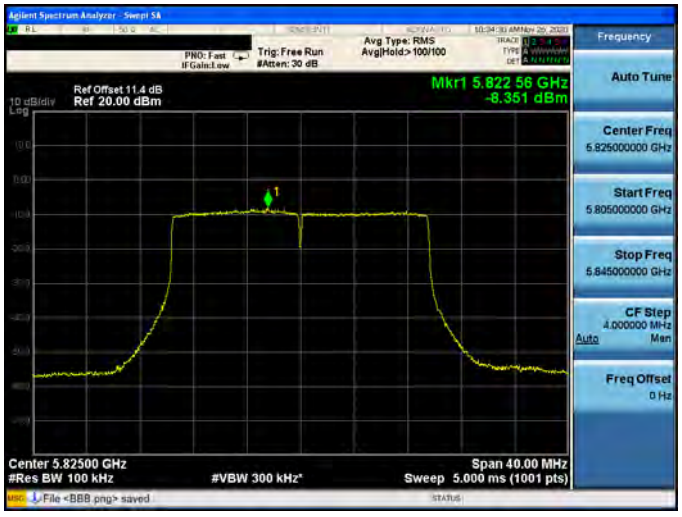
Mode 16: IEEE 802.11ax 20 MHz Continuous TX Mode_ANT-1	
5745 MHz	
5785 MHz	
5825 MHz	

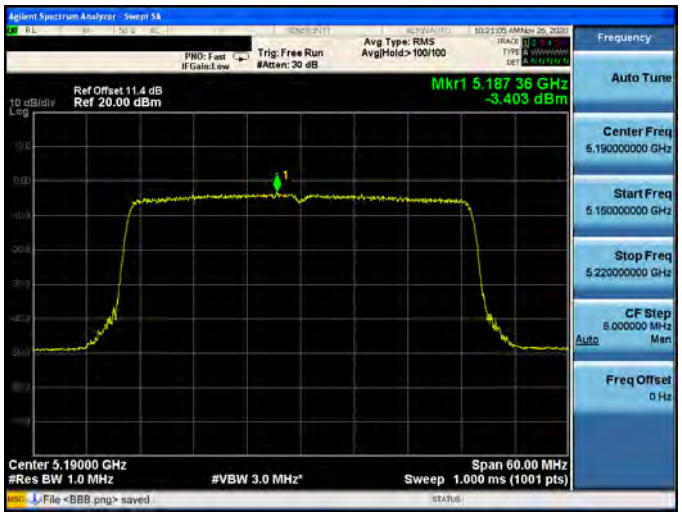
Mode 17: IEEE 802.11ax 40 MHz Continuous TX Mode_ANT-1	
5190 MHz	
5230 MHz	


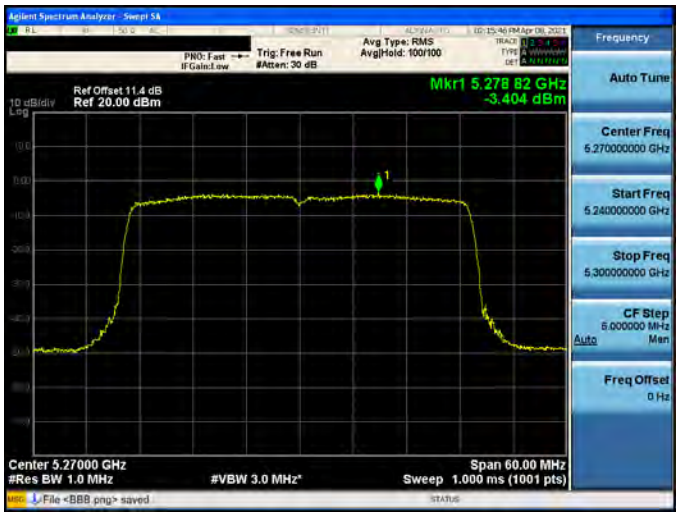
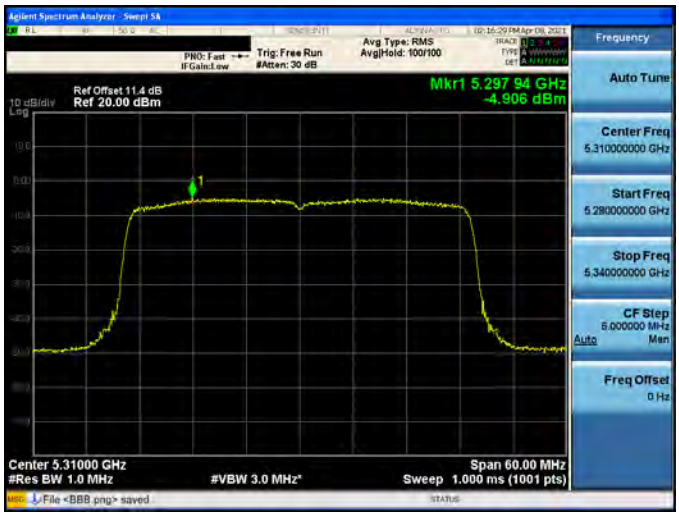
Mode 17: IEEE 802.11ax 40 MHz Continuous TX Mode_ANT-1	
5270 MHz	
5310 MHz	

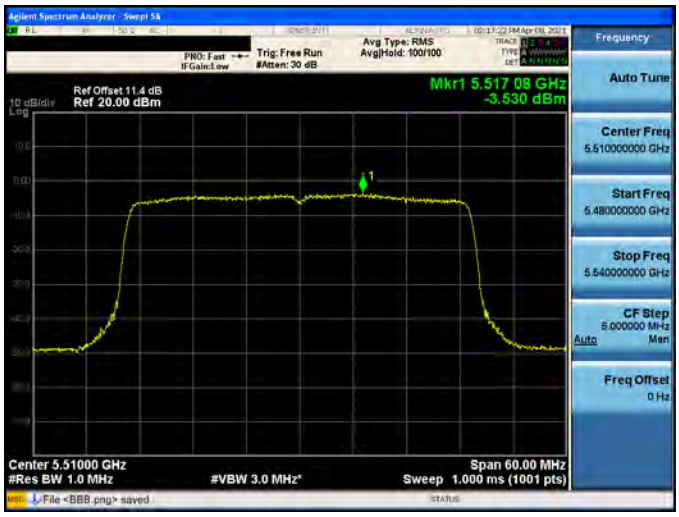
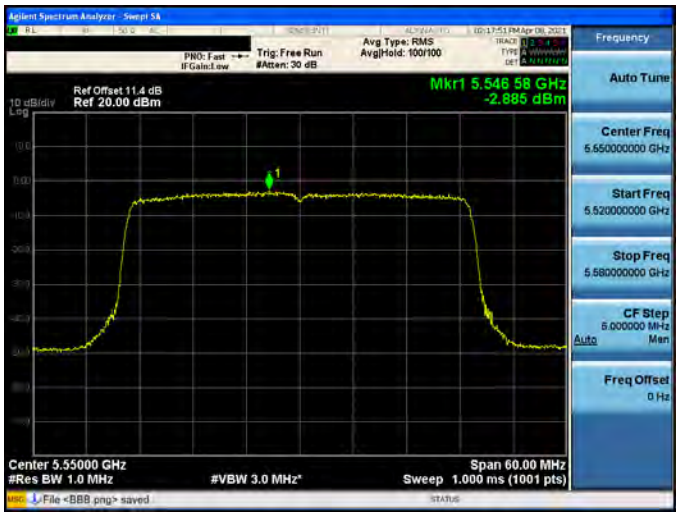
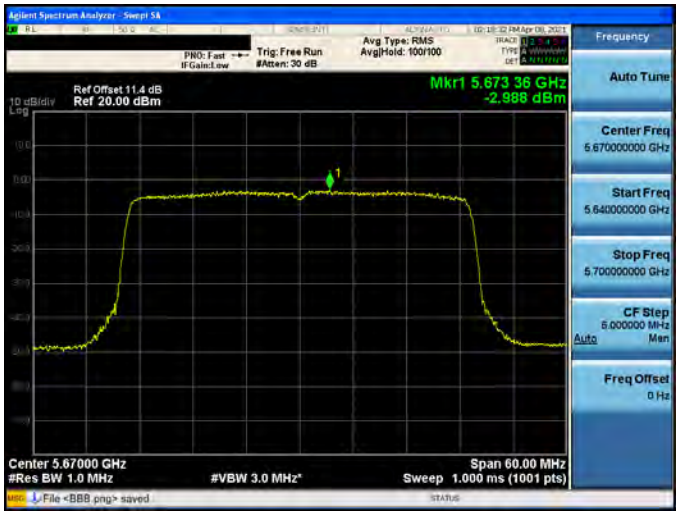
Mode 17: IEEE 802.11ax 40 MHz Continuous TX Mode_ANT-1	
5510 MHz	
5550 MHz	
5670 MHz	




Mode 17: IEEE 802.11ax 40 MHz Continuous TX Mode_ANT-1	
5755 MHz	
5795 MHz	



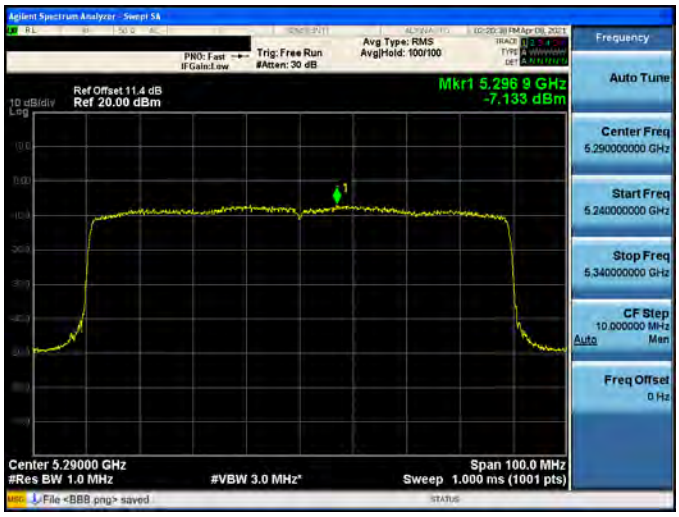
Mode 18: IEEE 802.11ax 80 MHz Continuous TX Mode_ANT-1	
5210 MHz	
5290 MHz	

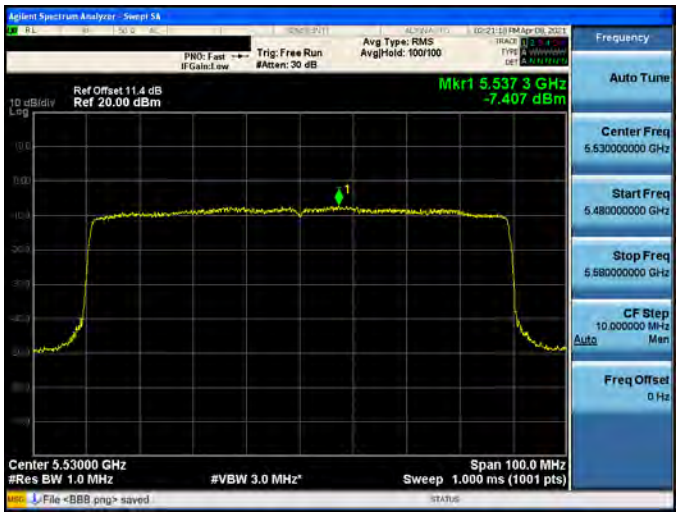
Mode 18: IEEE 802.11ax 80 MHz Continuous TX Mode_ANT-1	
5530 MHz	
5775 MHz	

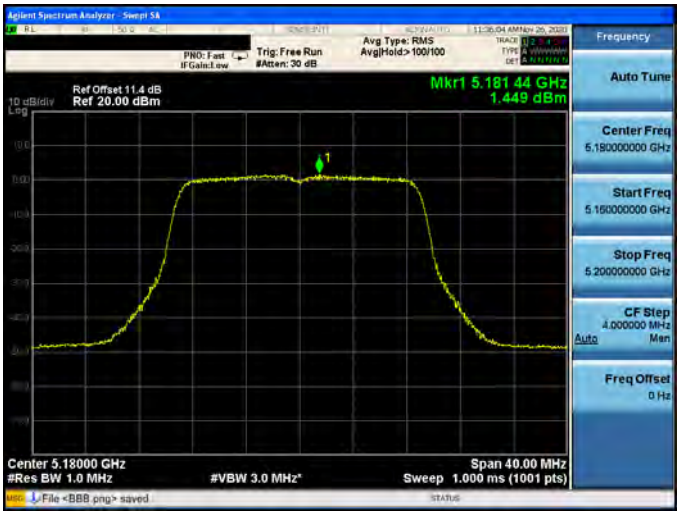
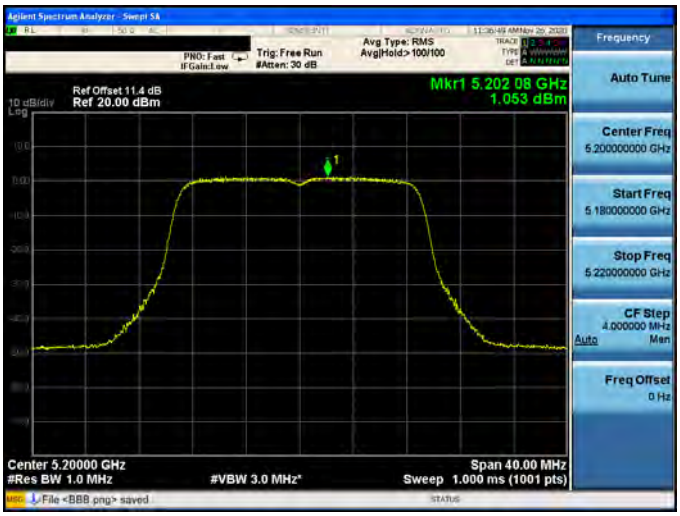
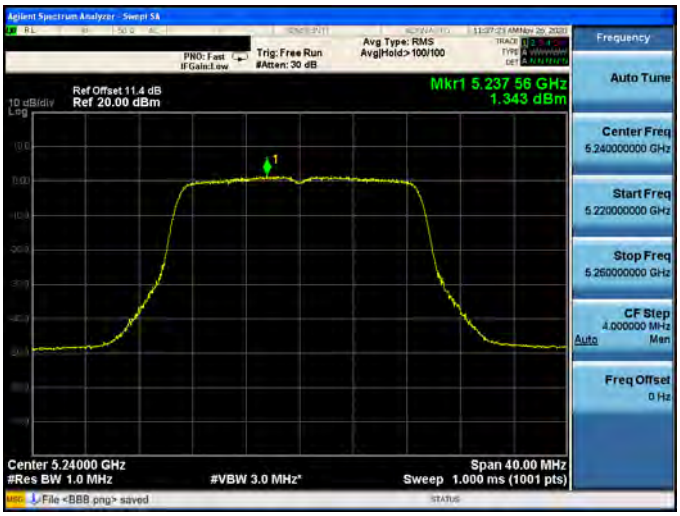
Mode 13: IEEE 802.11ac 20 MHz Continuous TX Mode_ANT-2	
5180 MHz	
5200 MHz	
5240 MHz	

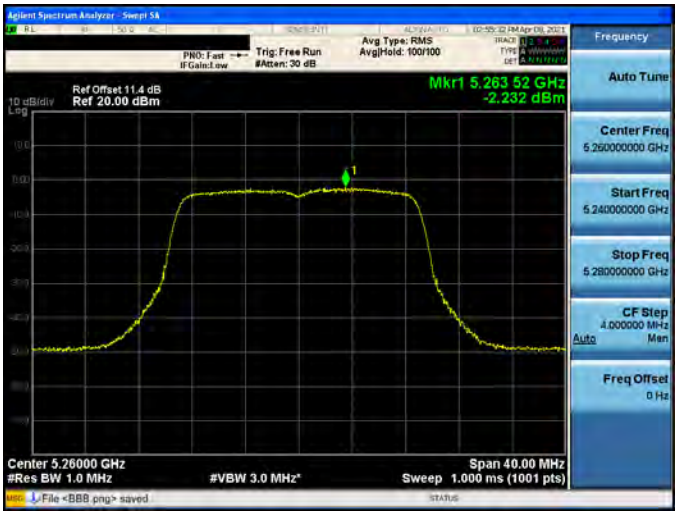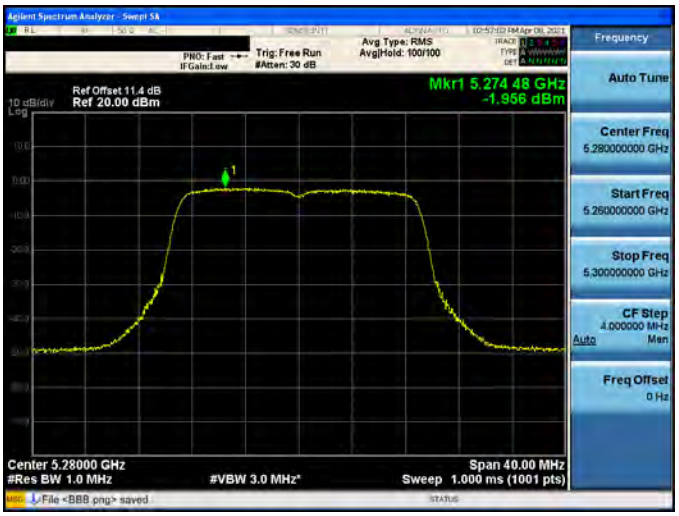
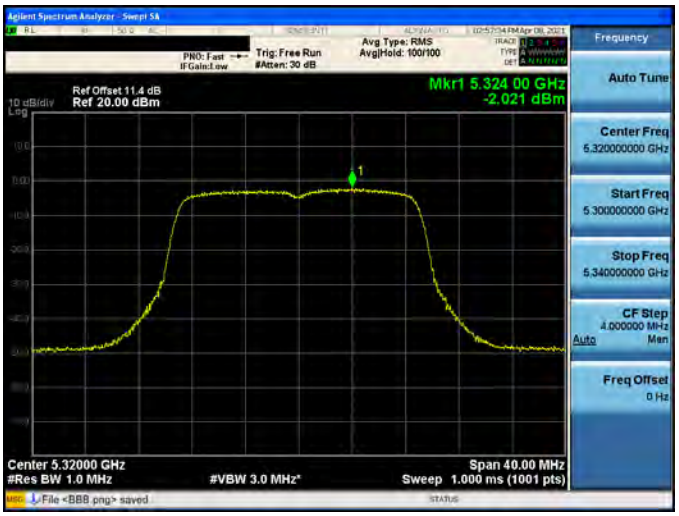
Mode 13: IEEE 802.11ac 20 MHz Continuous TX Mode_ANT-2	
5260 MHz	
5280 MHz	
5320 MHz	

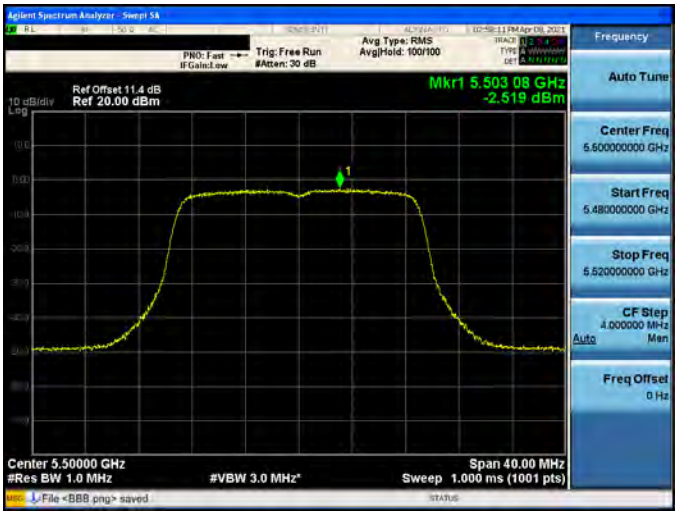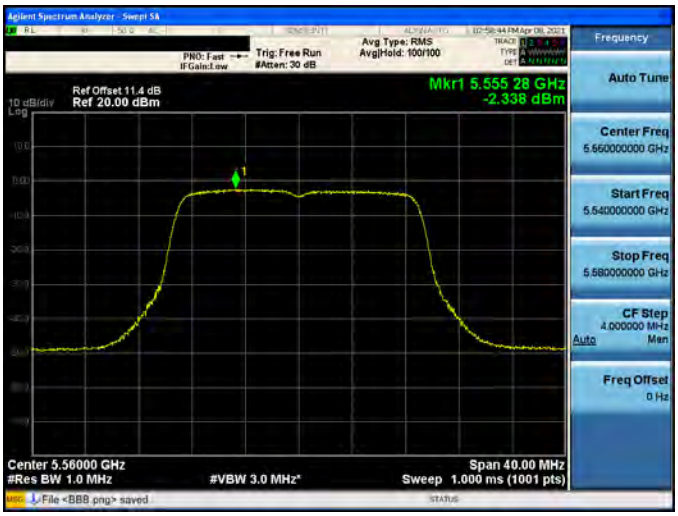
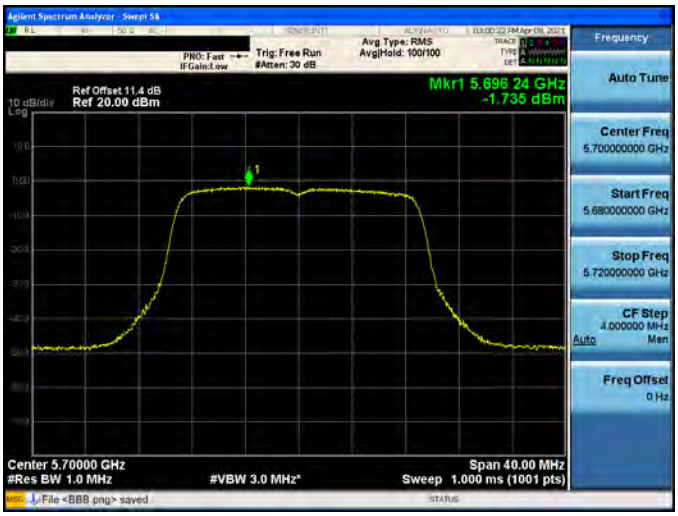
Mode 13: IEEE 802.11ac 20 MHz Continuous TX Mode_ANT-2	
5500 MHz	
5560 MHz	
5700 MHz	

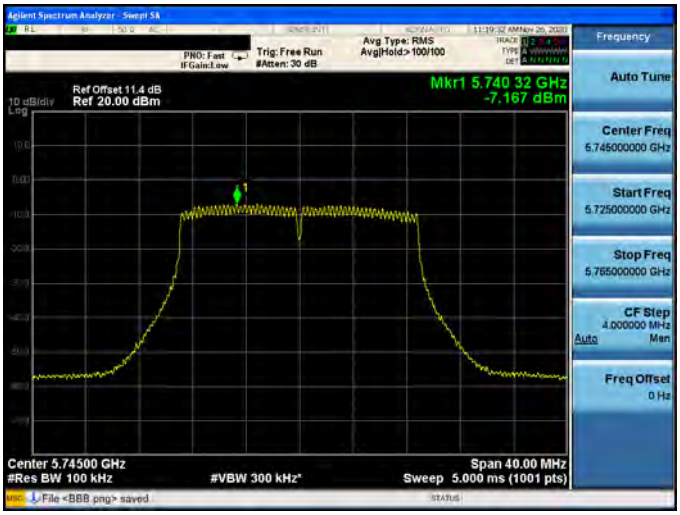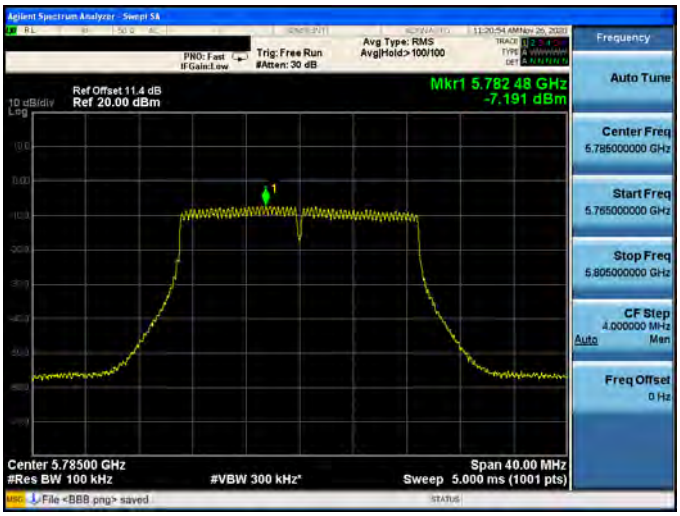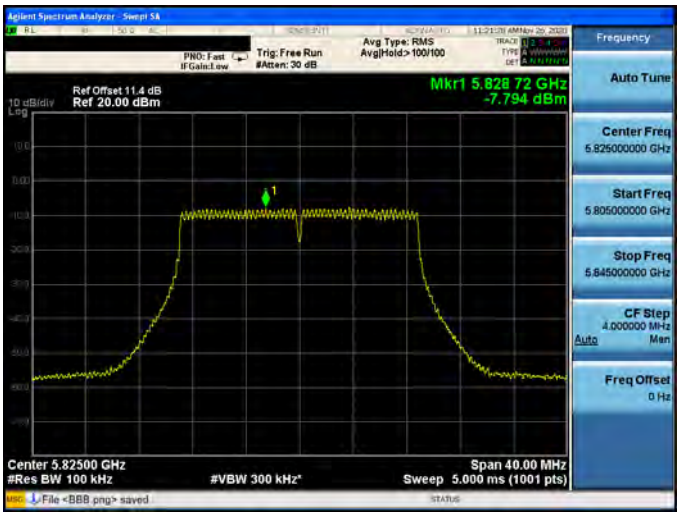
Mode 13: IEEE 802.11ac 20 MHz Continuous TX Mode_ANT-2	
5745 MHz	
5785 MHz	
5825 MHz	

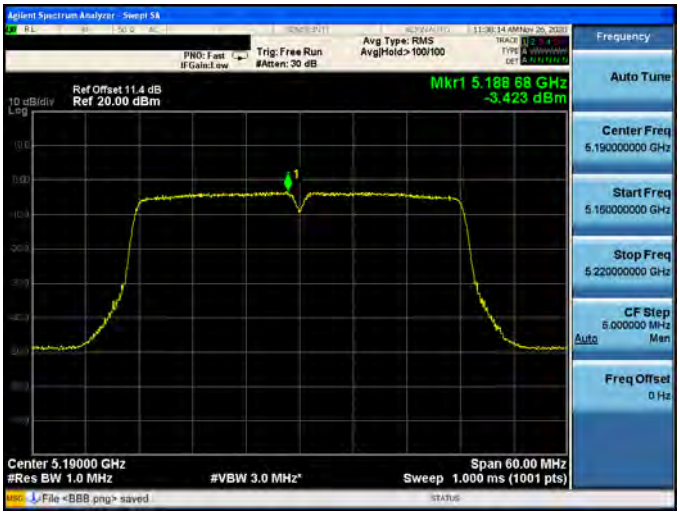Mode 14: IEEE 802.11ac 40 MHz Continuous TX Mode_ANT-2	
5190 MHz	
5230 MHz	

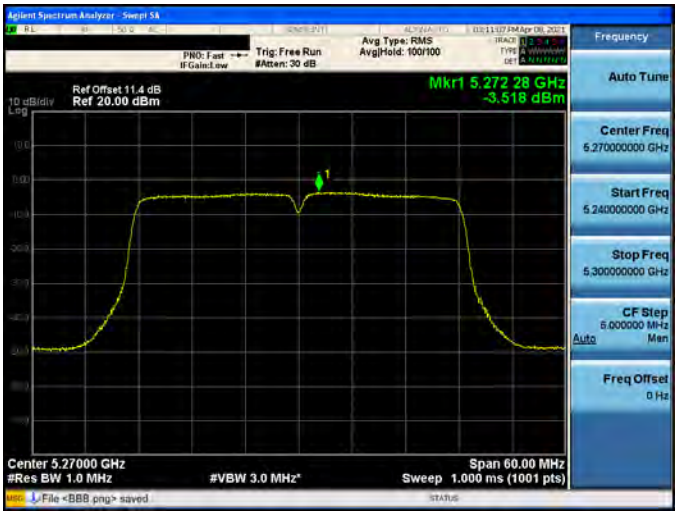
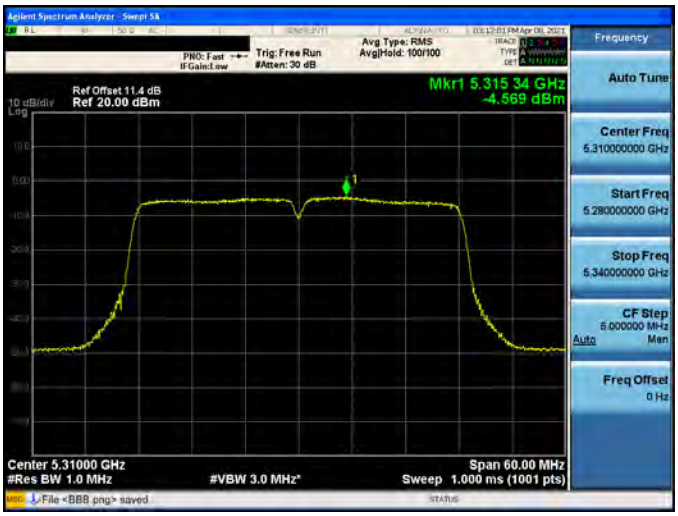
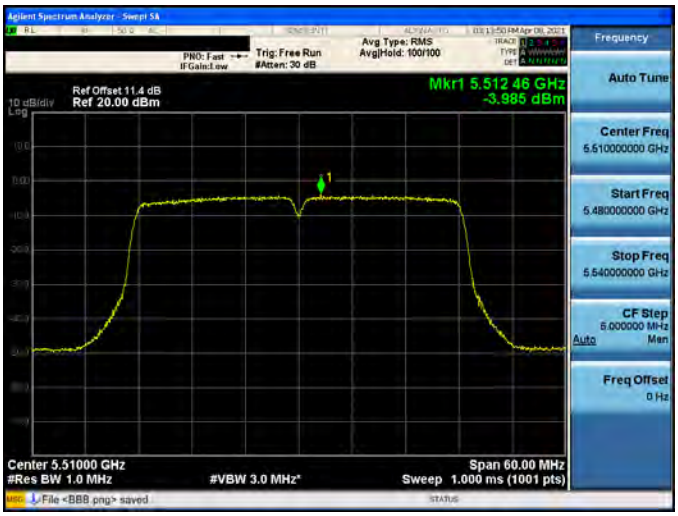
Mode 14: IEEE 802.11ac 40 MHz Continuous TX Mode_ANT-2	
5270 MHz	
5310 MHz	
5510 MHz	


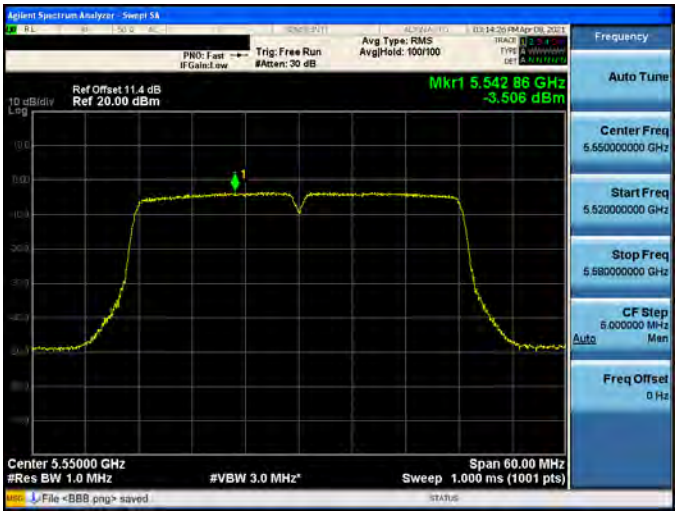
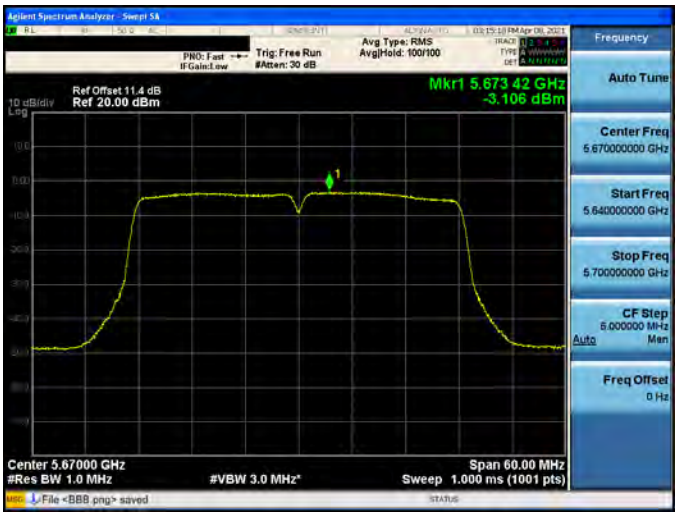
Mode 14: IEEE 802.11ac 40 MHz Continuous TX Mode_ANT-2	
5550 MHz	
5670 MHz	


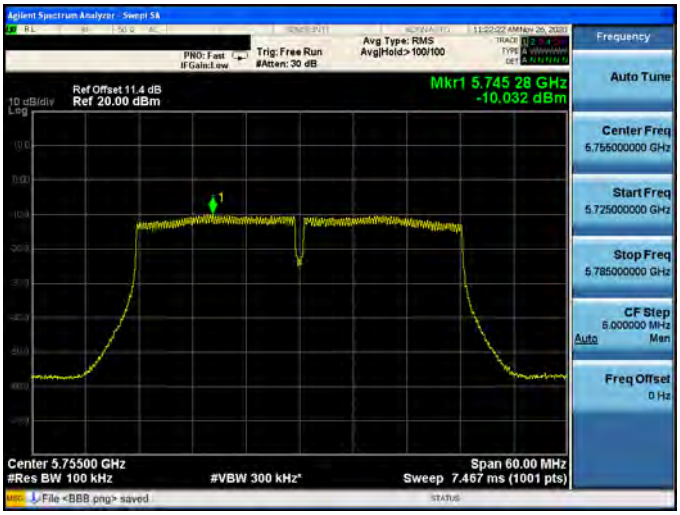
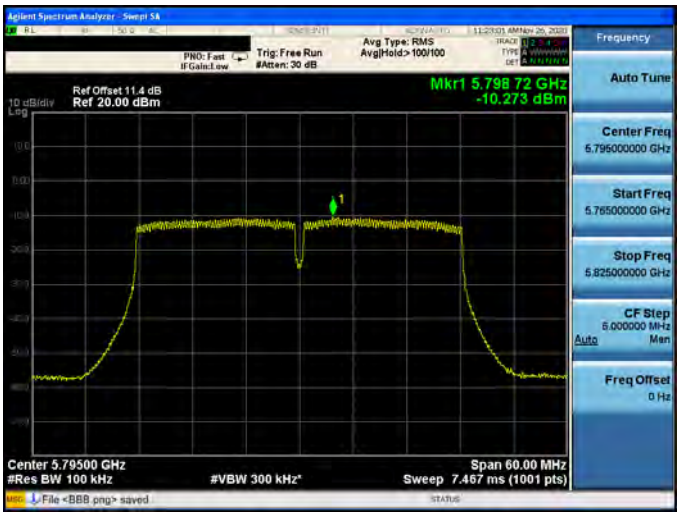
Mode 14: IEEE 802.11ac 40 MHz Continuous TX Mode_ANT-2	
5755 MHz	
5795 MHz	



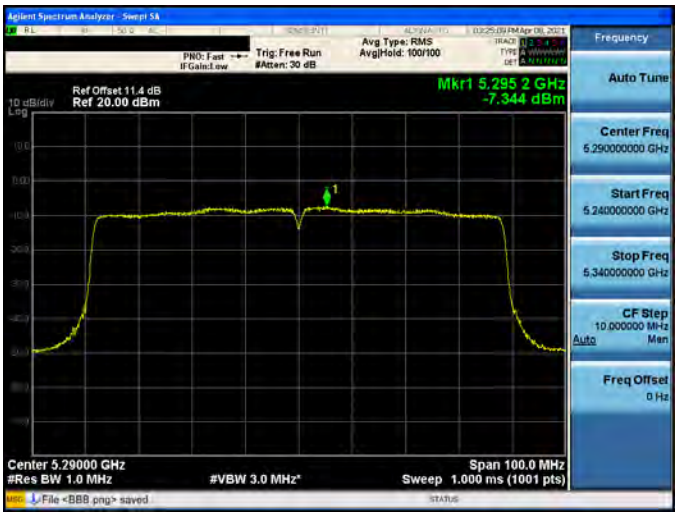
Mode 15: IEEE 802.11ac 80 MHz Continuous TX Mode_ANT-2	
5210 MHz	
5290 MHz	
5530 MHz	



Mode 15: IEEE 802.11ac 80 MHz Continuous TX Mode_ANT-2	
5775 MHz	

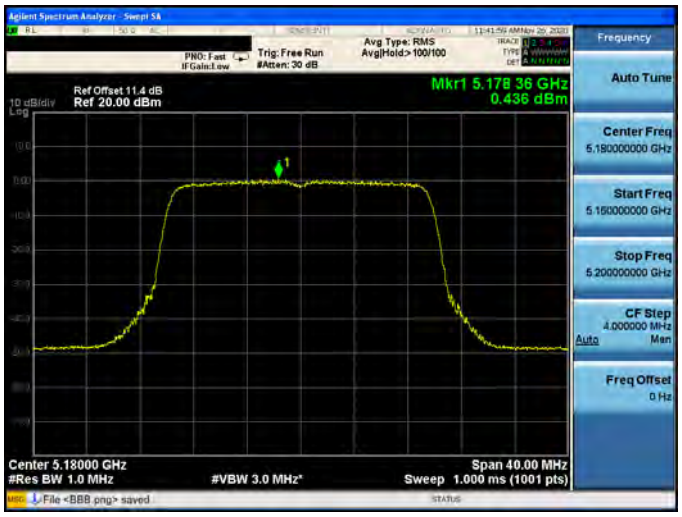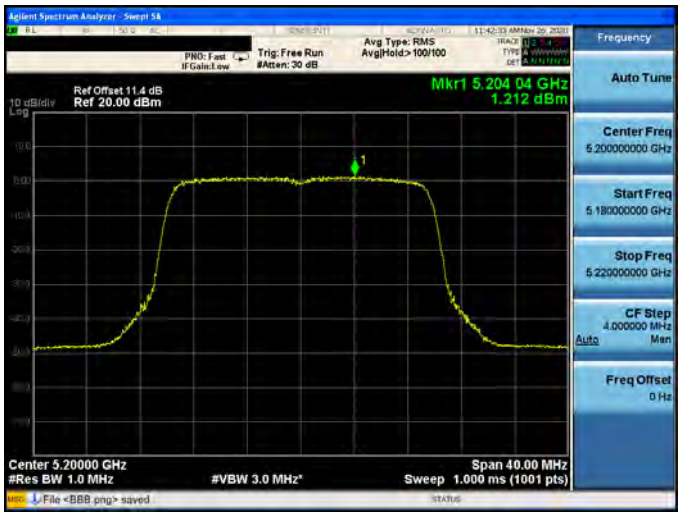
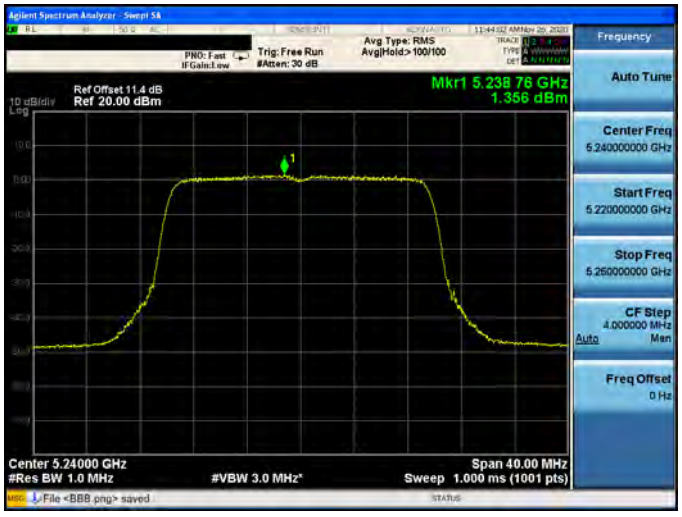
Mode 16: IEEE 802.11ax 20 MHz Continuous TX Mode_ANT-2	
5180 MHz	
5200 MHz	
5240 MHz	

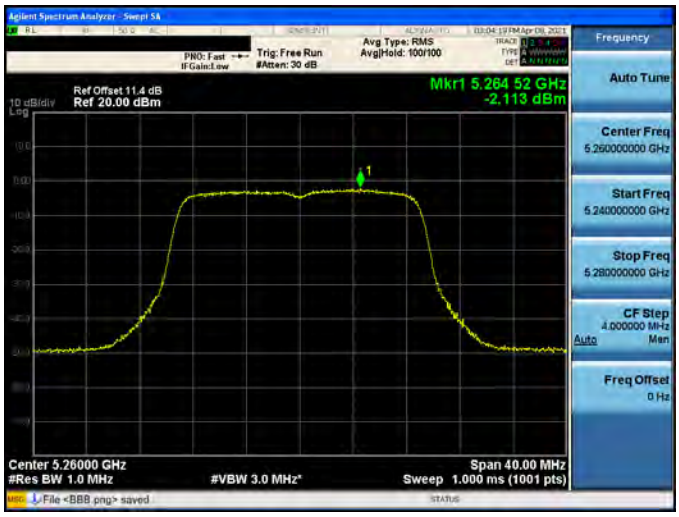
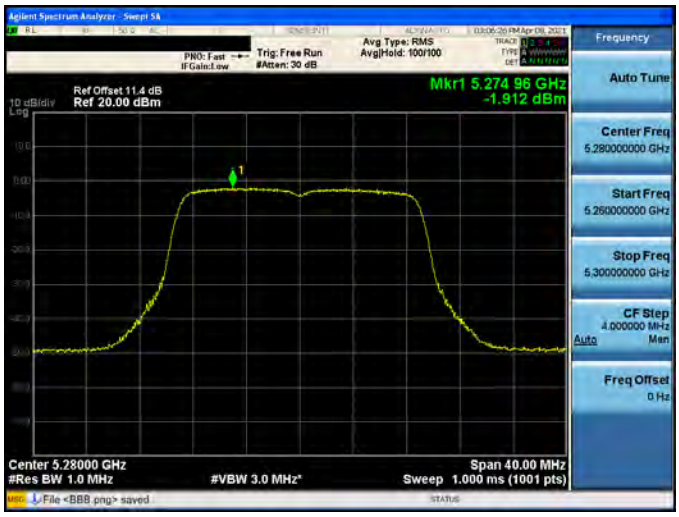
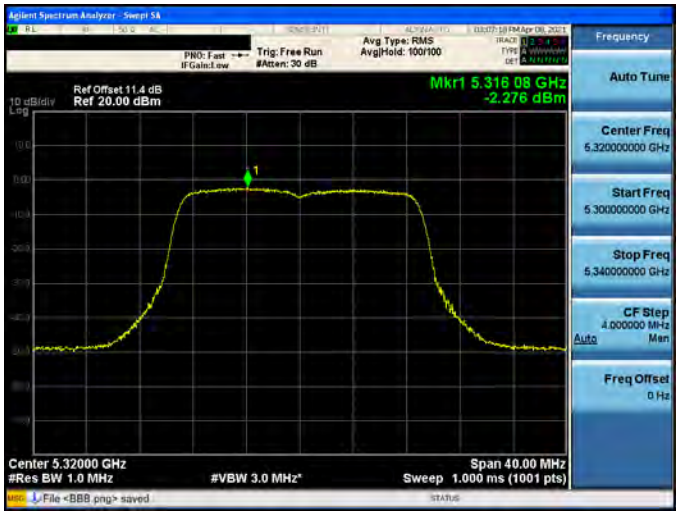
Mode 16: IEEE 802.11ax 20 MHz Continuous TX Mode_ANT-2	
5260 MHz	
5280 MHz	
5320 MHz	

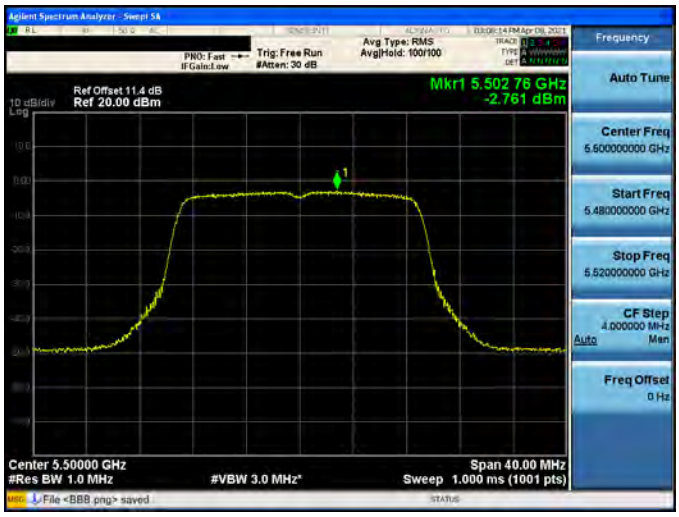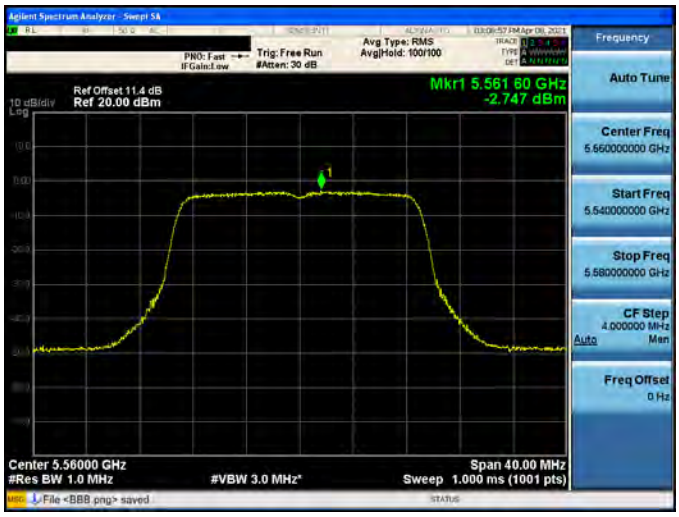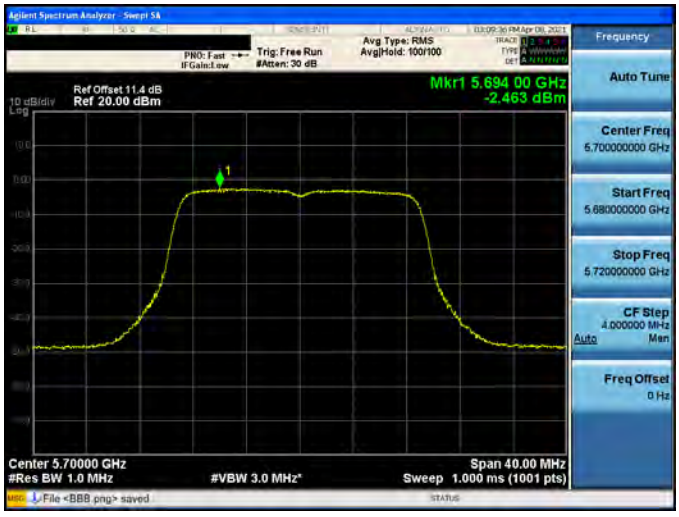Mode 16: IEEE 802.11ax 20 MHz Continuous TX Mode_ANT-2	
5500 MHz	
5560 MHz	
5700 MHz	

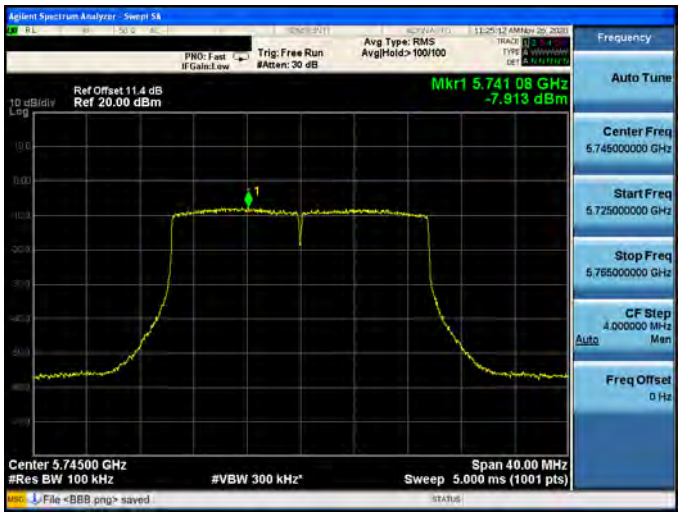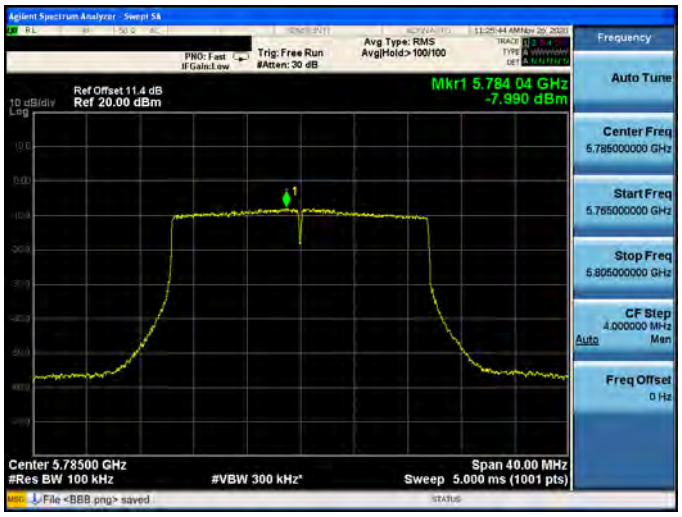
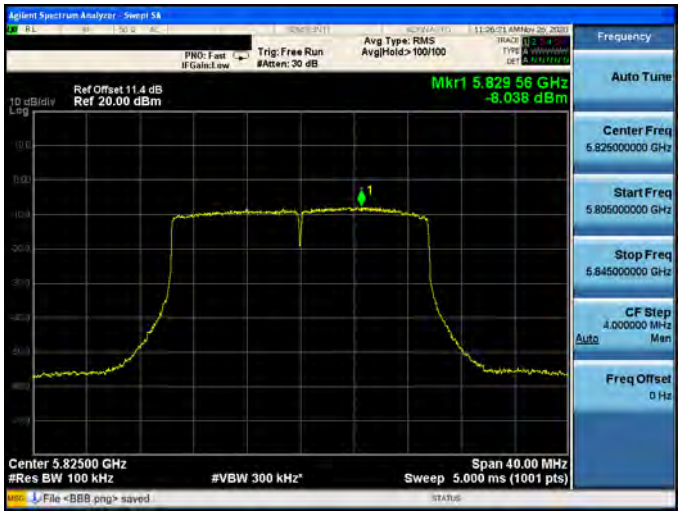
Mode 16: IEEE 802.11ax 20 MHz Continuous TX Mode_ANT-2	
5745 MHz	
5785 MHz	
5825 MHz	

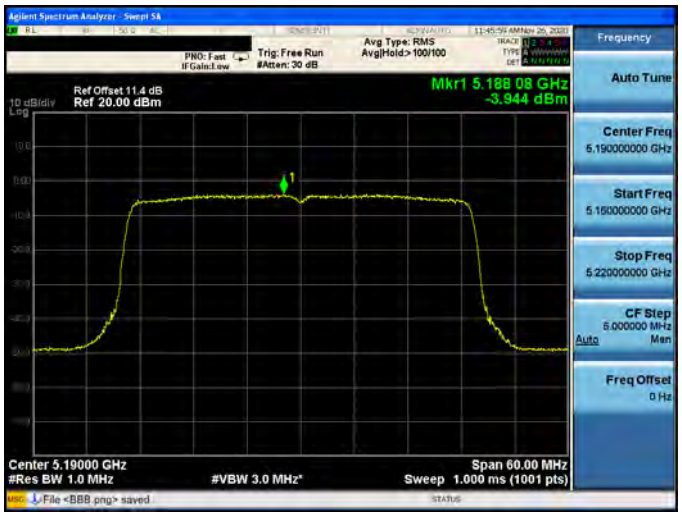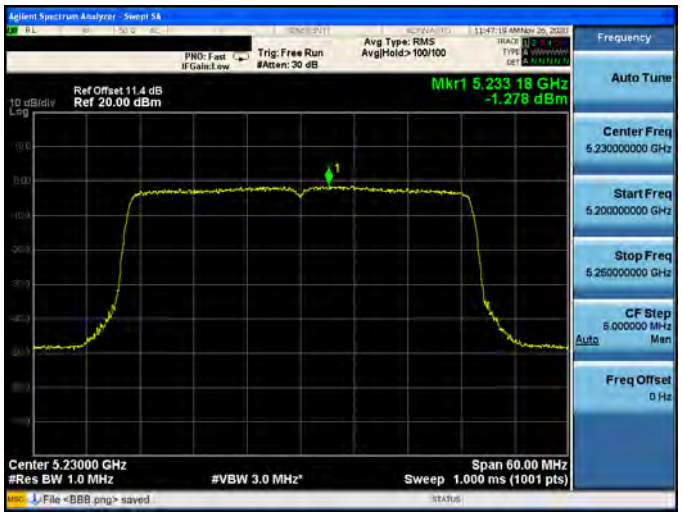Mode 17: IEEE 802.11ax 40 MHz Continuous TX Mode_ANT-2	
5190 MHz	
5230 MHz	


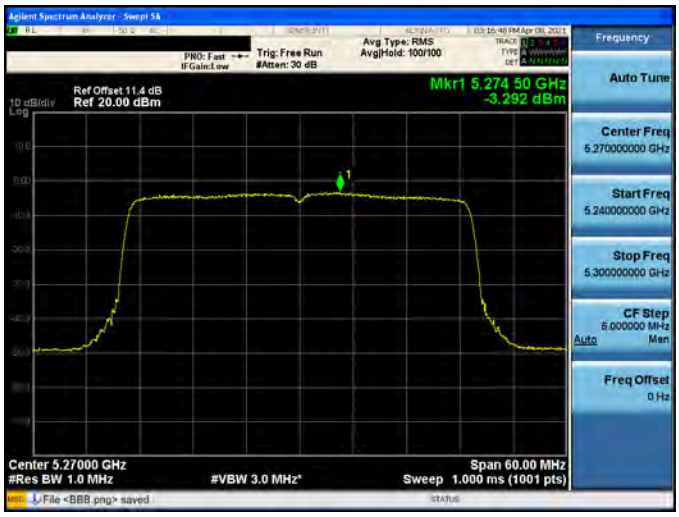
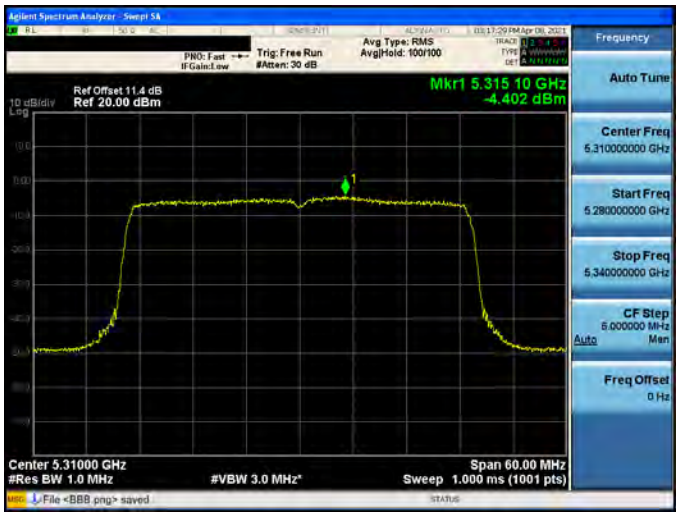
Mode 17: IEEE 802.11ax 40 MHz Continuous TX Mode_ANT-2	
5270 MHz	
5310 MHz	

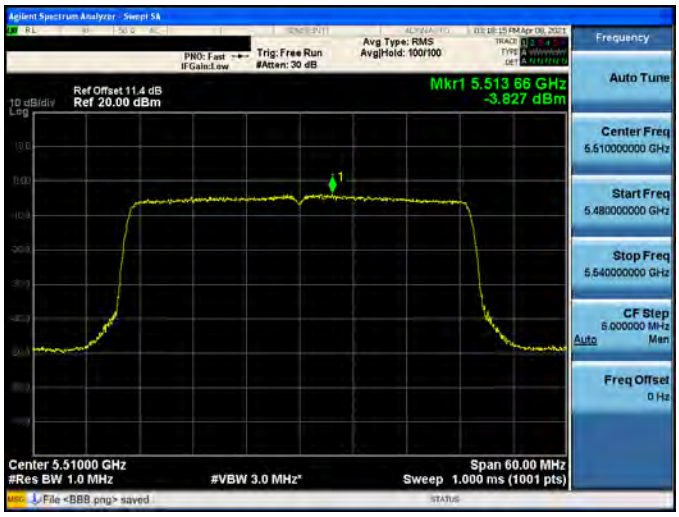
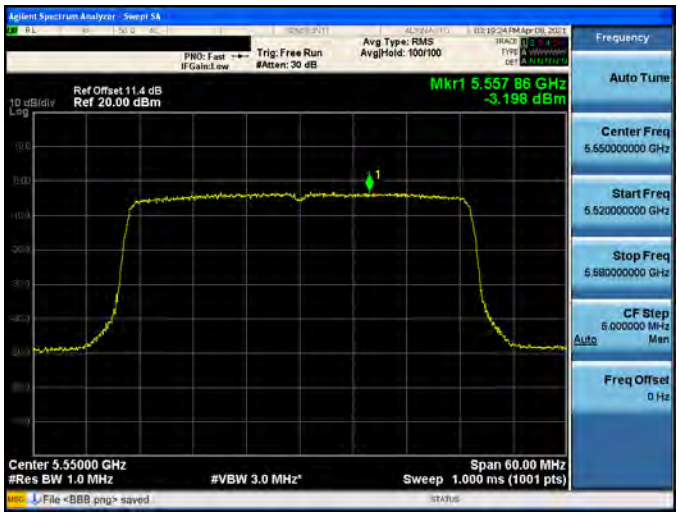
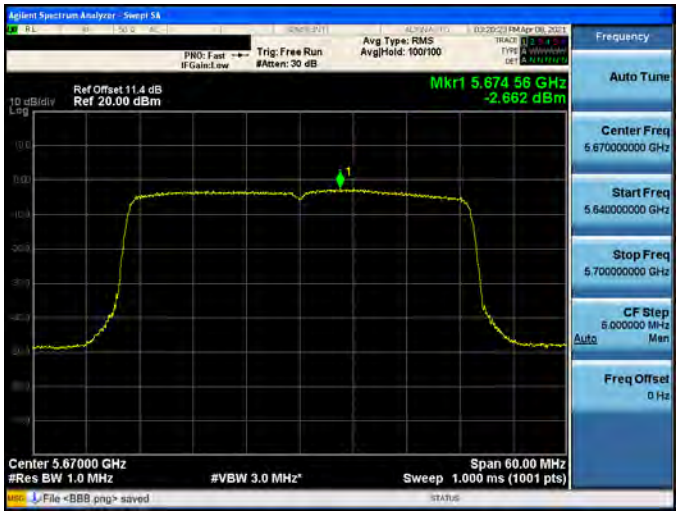
Mode 17: IEEE 802.11ax 40 MHz Continuous TX Mode_ANT-2	
5510 MHz	
5550 MHz	
5670 MHz	




Mode 17: IEEE 802.11ax 40 MHz Continuous TX Mode_ANT-2	
5755 MHz	
5795 MHz	


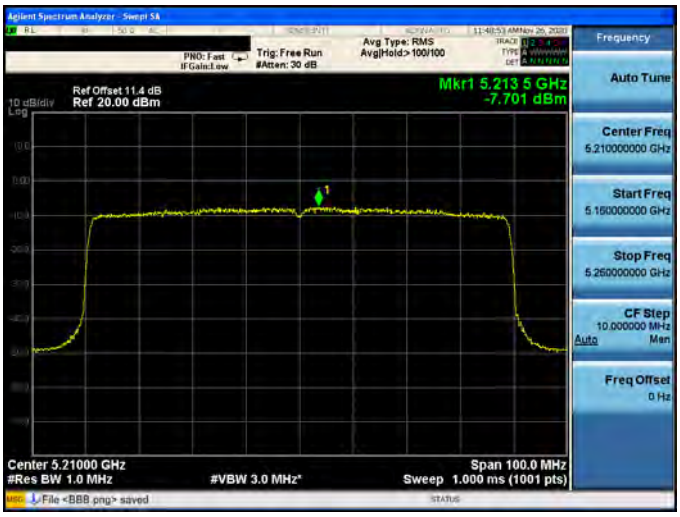
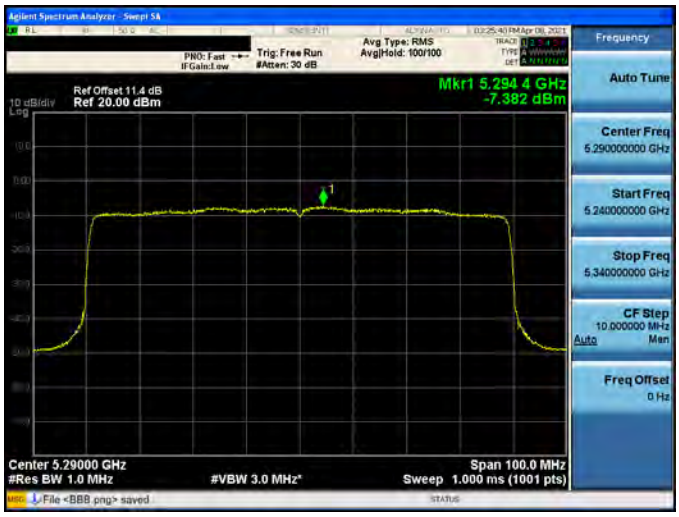
Mode 18: IEEE 802.11ax 80 MHz Continuous TX Mode_ANT-2	
5210 MHz	
5290 MHz	



Mode 18: IEEE 802.11ax 80 MHz Continuous TX Mode_ANT-2	
5530 MHz	
5775 MHz	

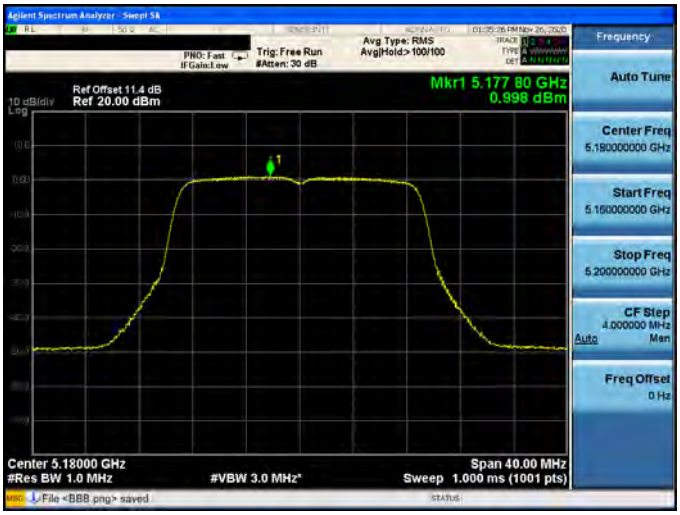
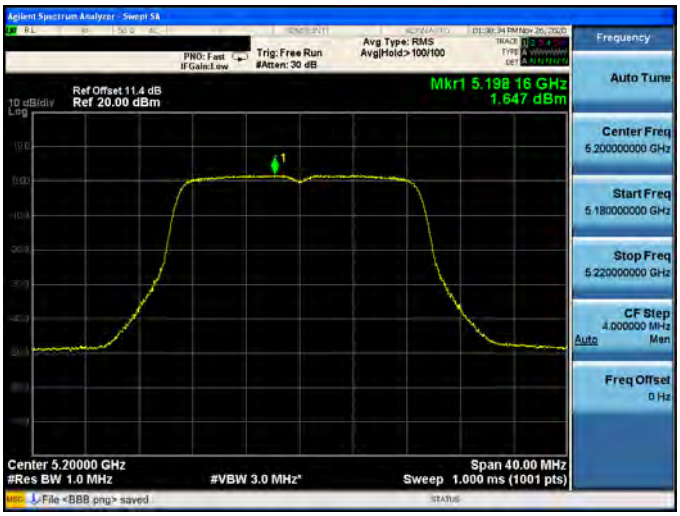
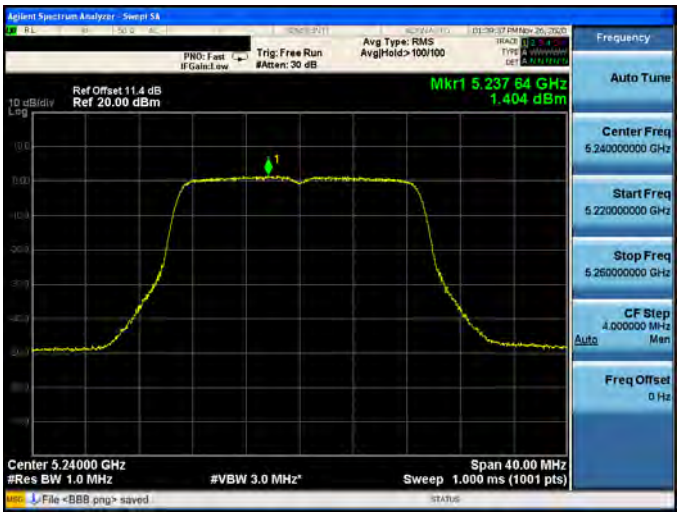
Mode 13: IEEE 802.11ac 20 MHz Continuous TX Mode_ANT-3	
5180 MHz	
5200 MHz	
5240 MHz	

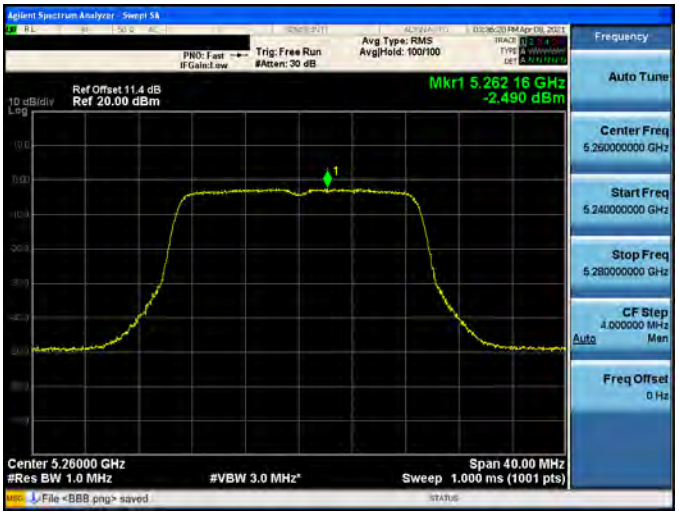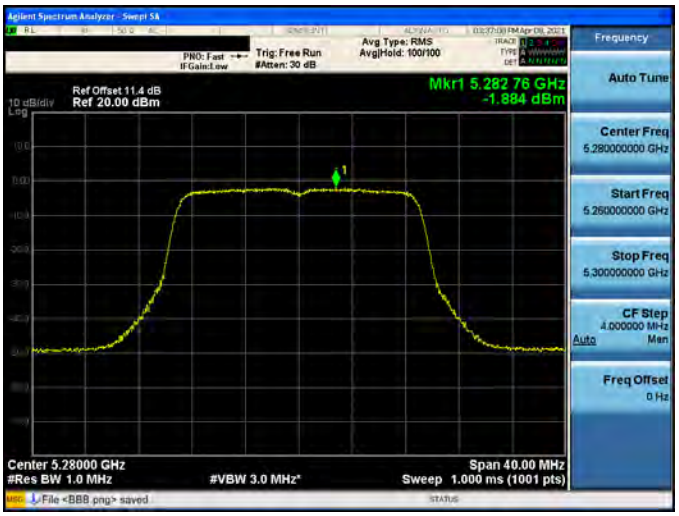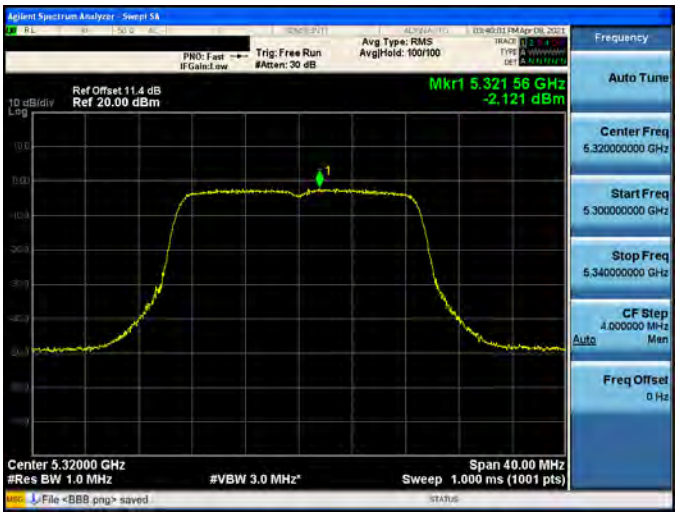
Mode 13: IEEE 802.11ac 20 MHz Continuous TX Mode_ANT-3	
5260 MHz	
5280 MHz	
5320 MHz	

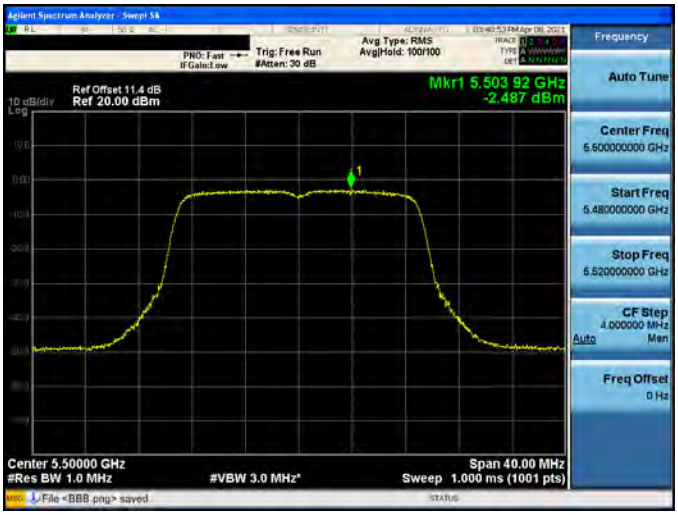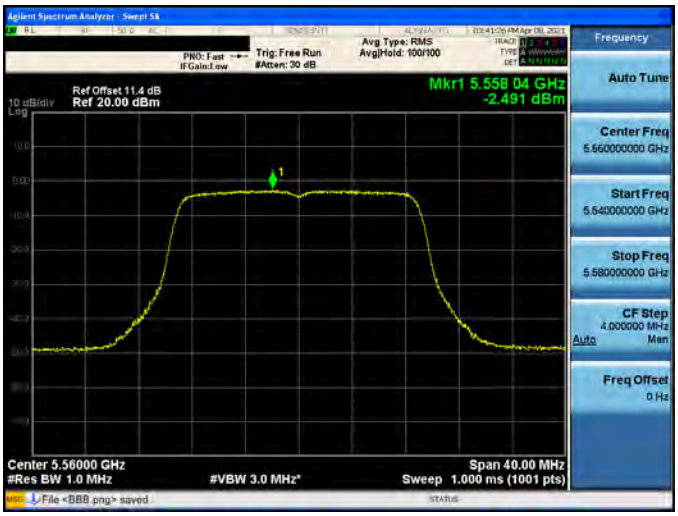
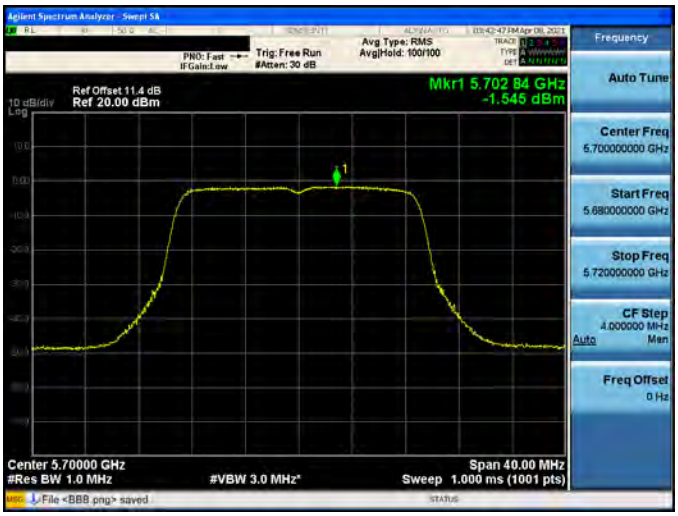
Mode 13: IEEE 802.11ac 20 MHz Continuous TX Mode_ANT-3	
5500 MHz	
5560 MHz	
5700 MHz	

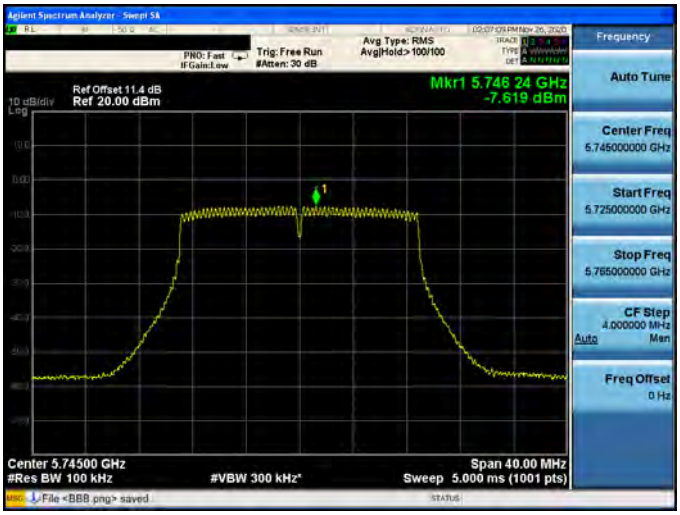
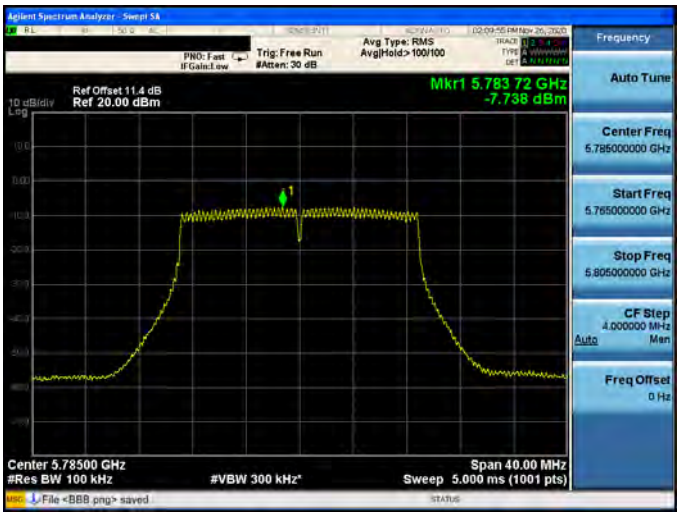
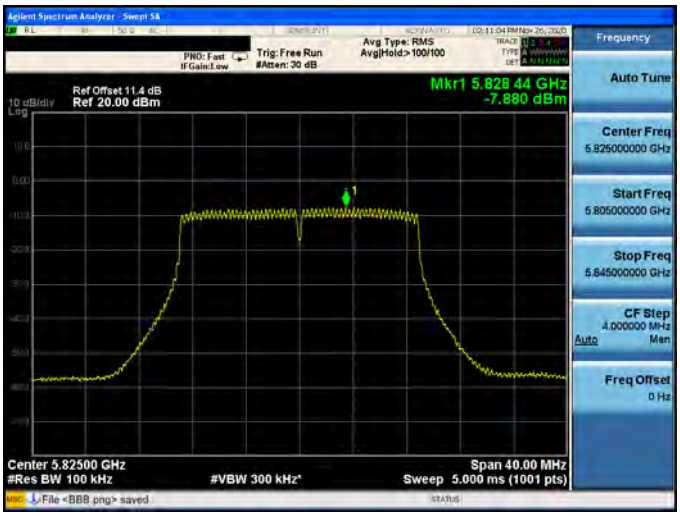
Mode 13: IEEE 802.11ac 20 MHz Continuous TX Mode_ANT-3	
5745 MHz	
5785 MHz	
5825 MHz	

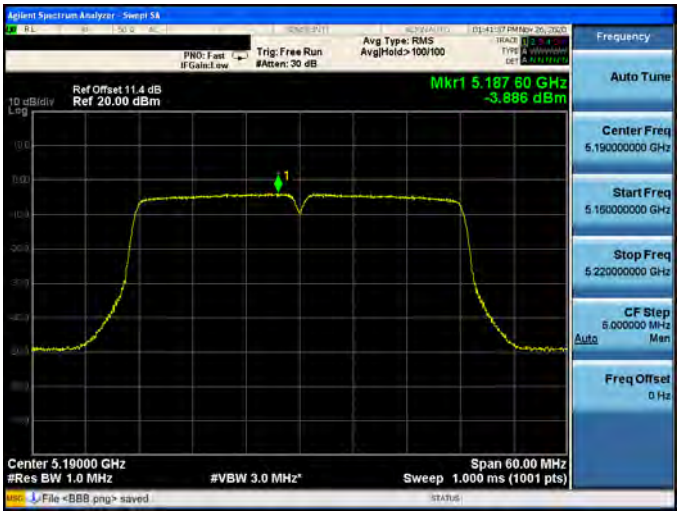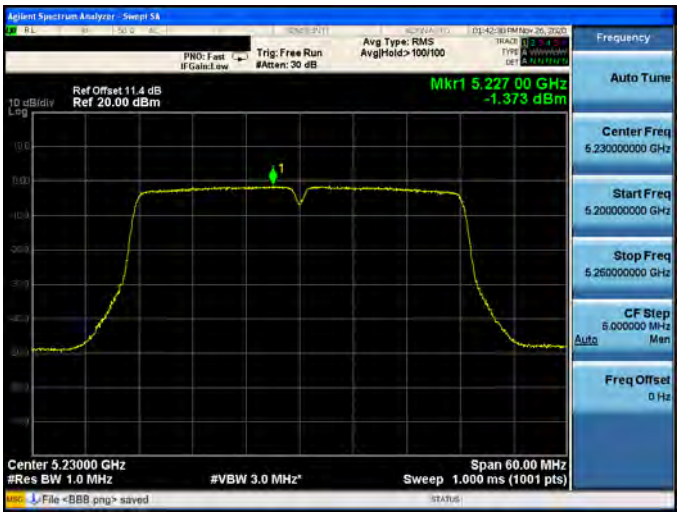
Mode 14: IEEE 802.11ac 40 MHz Continuous TX Mode_ANT-3	
5190 MHz	
5230 MHz	

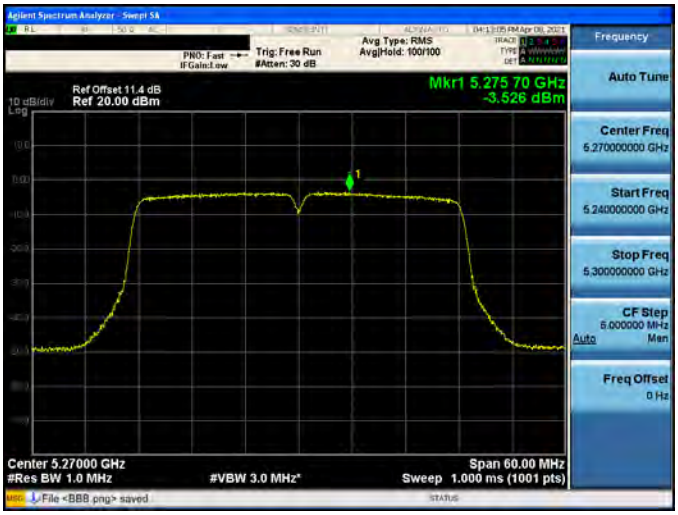
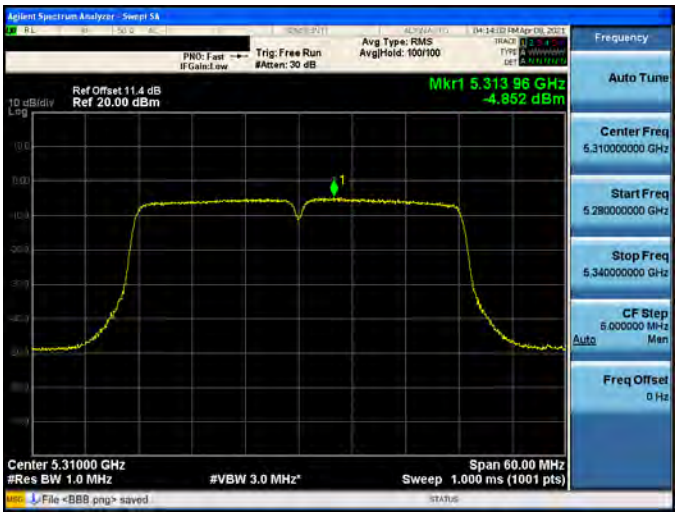
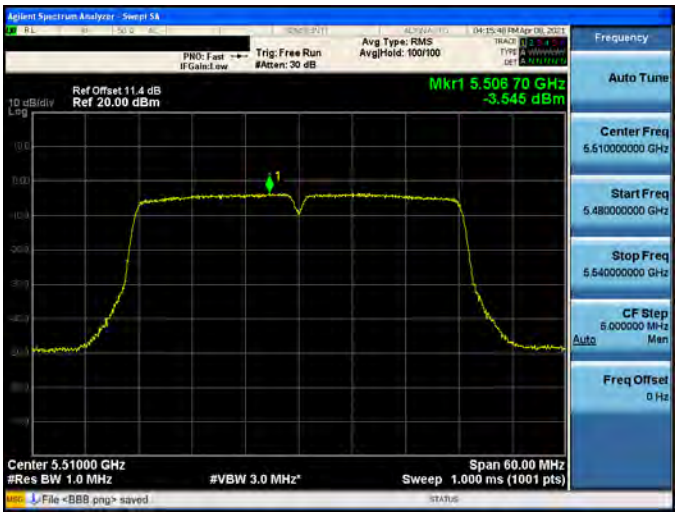
Mode 14: IEEE 802.11ac 40 MHz Continuous TX Mode_ANT-3	
5270 MHz	
5310 MHz	
5510 MHz	



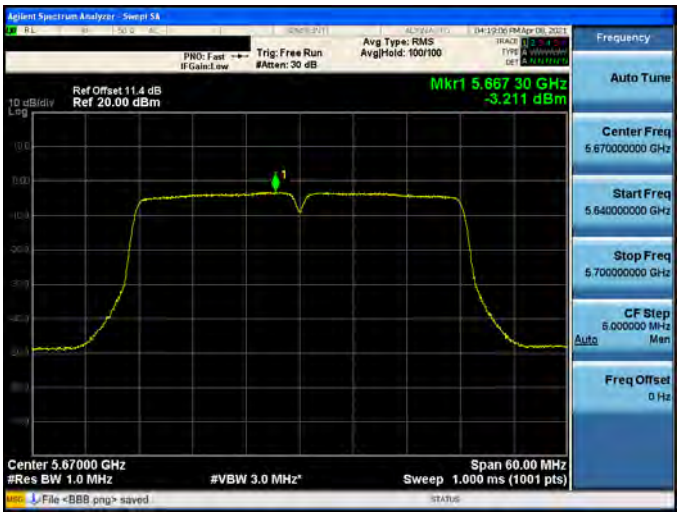
Mode 14: IEEE 802.11ac 40 MHz Continuous TX Mode_ANT-3	
5550 MHz	
5670 MHz	


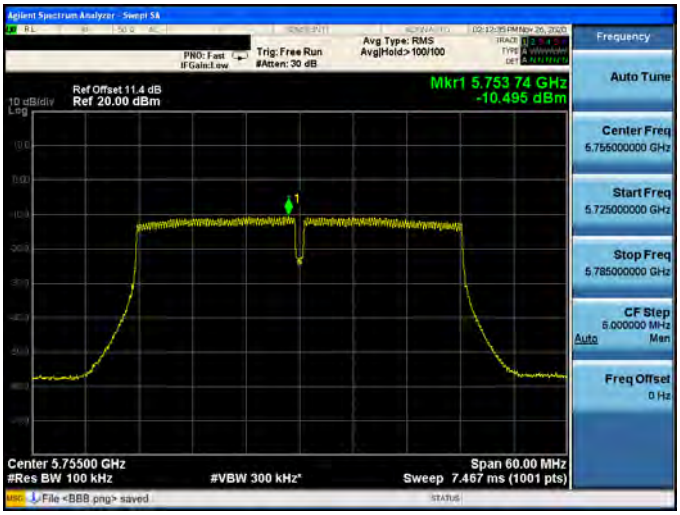
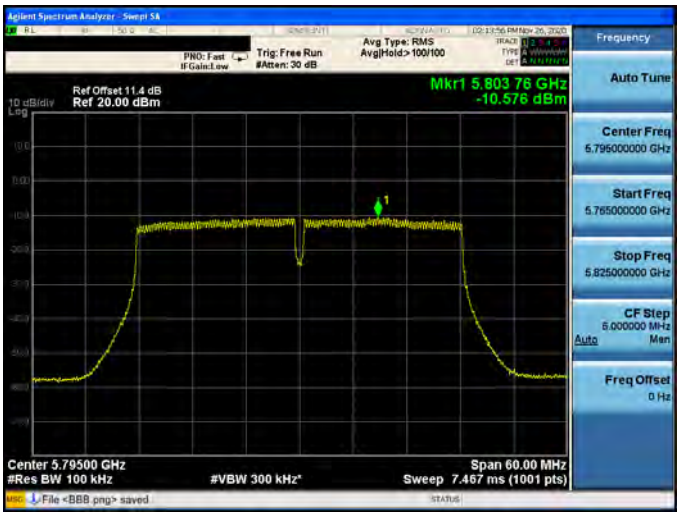
Mode 14: IEEE 802.11ac 40 MHz Continuous TX Mode_ANT-3	
5755 MHz	
5795 MHz	

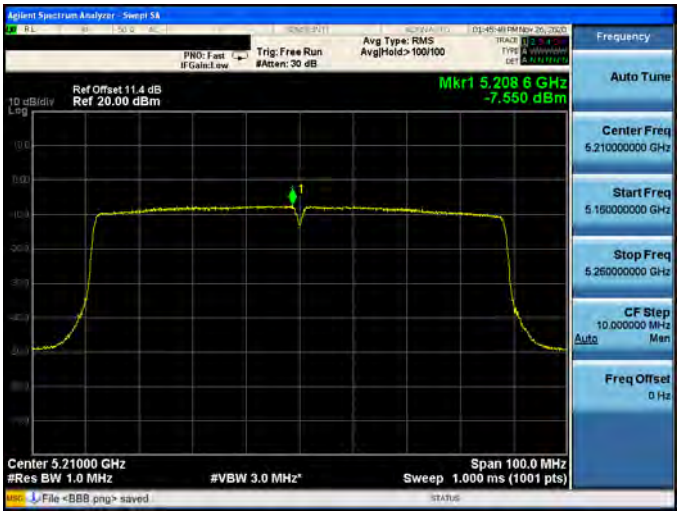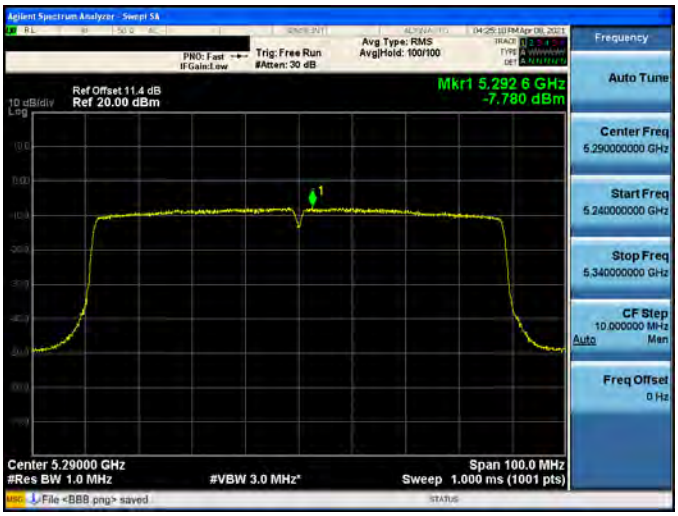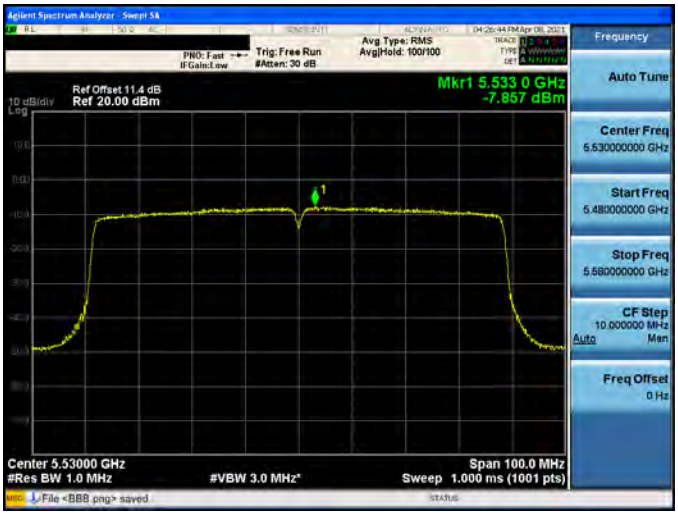
Mode 15: IEEE 802.11ac 80 MHz Continuous TX Mode_ANT-3	
5210 MHz	
5290 MHz	
5530 MHz	

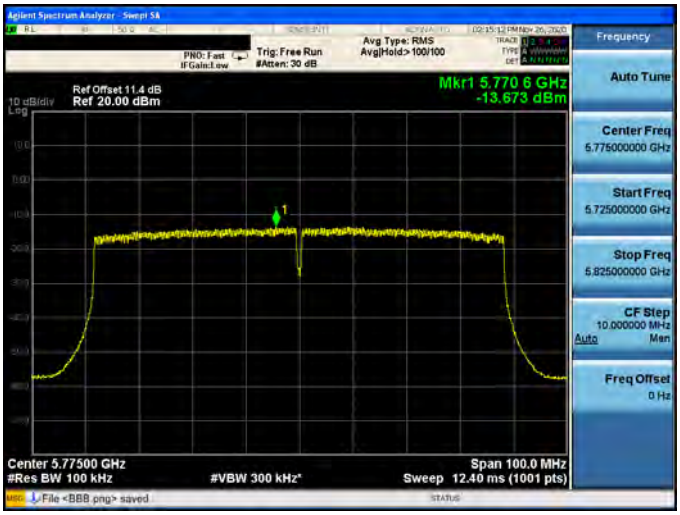
Mode 15: IEEE 802.11ac 80 MHz Continuous TX Mode_ANT-3	
5775 MHz	

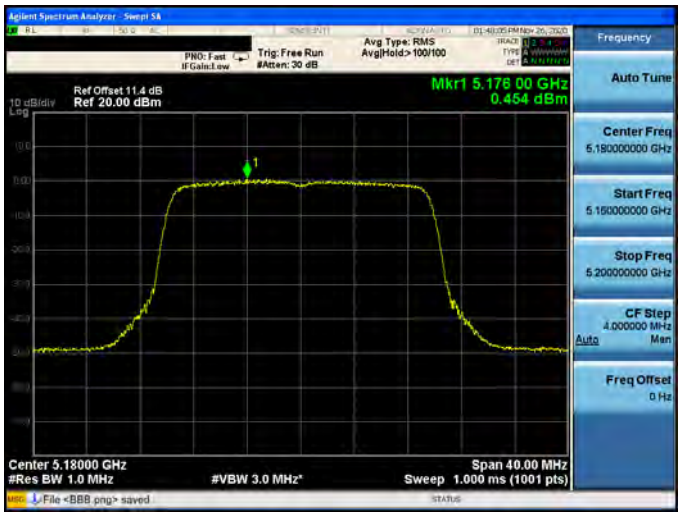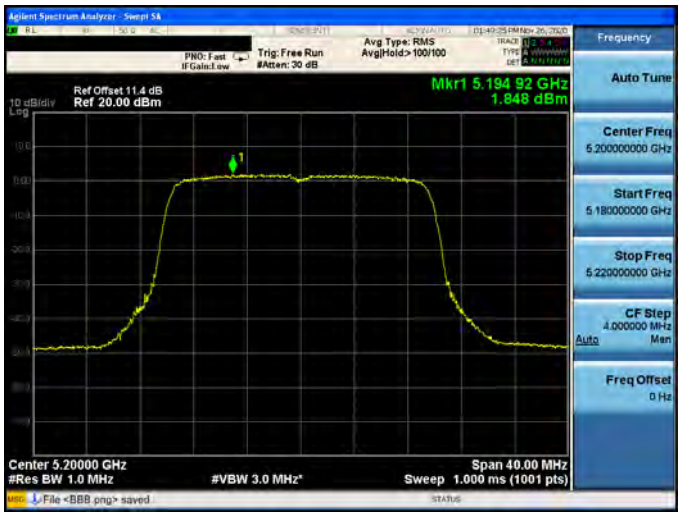
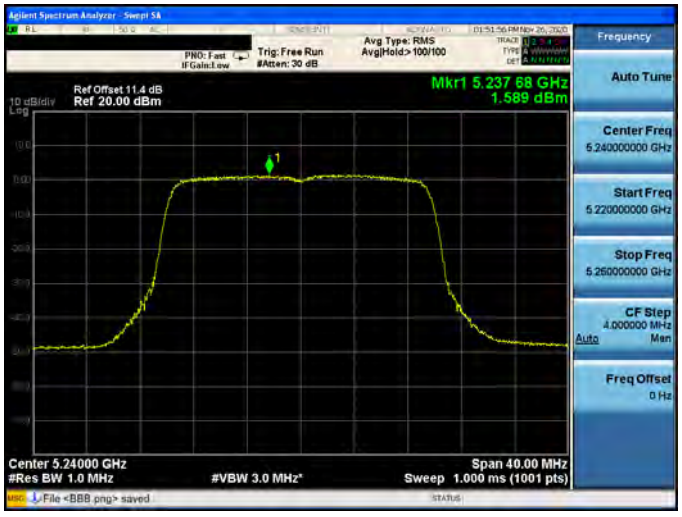
Mode 16: IEEE 802.11ax 20 MHz Continuous TX Mode_ANT-3	
5180 MHz	
5200 MHz	
5240 MHz	

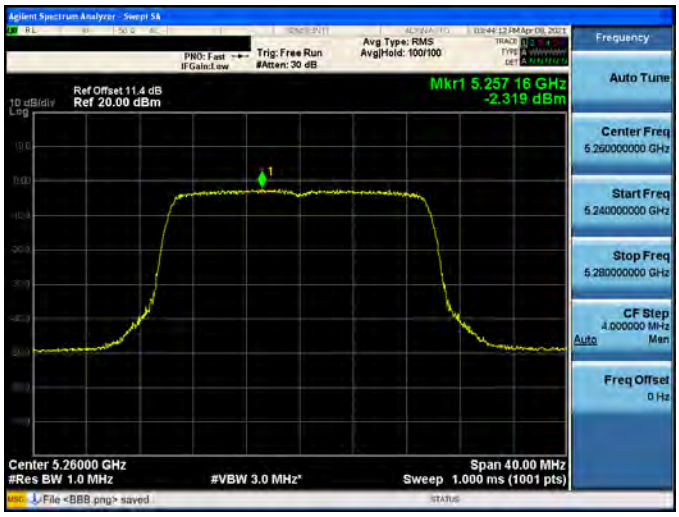
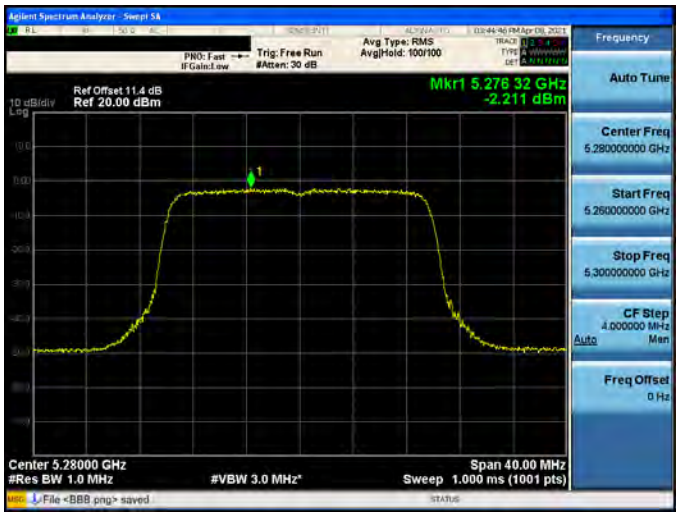
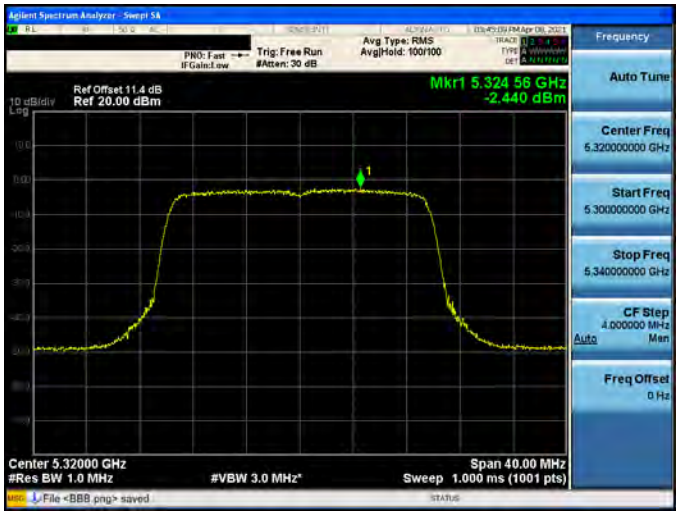
Mode 16: IEEE 802.11ax 20 MHz Continuous TX Mode_ANT-3	
5260 MHz	
5280 MHz	
5320 MHz	

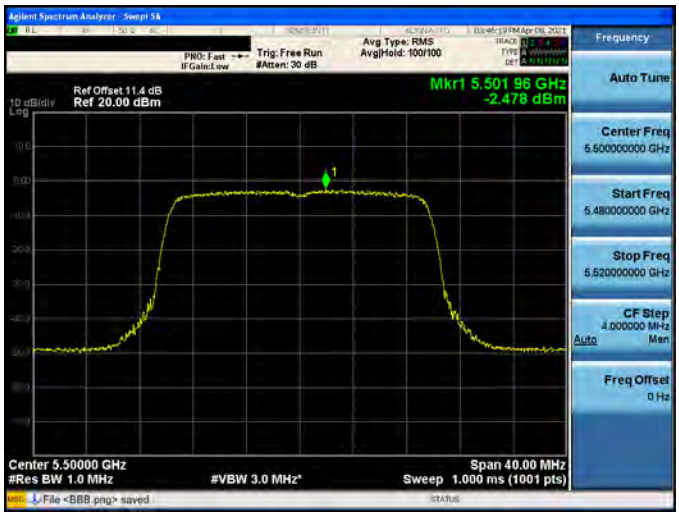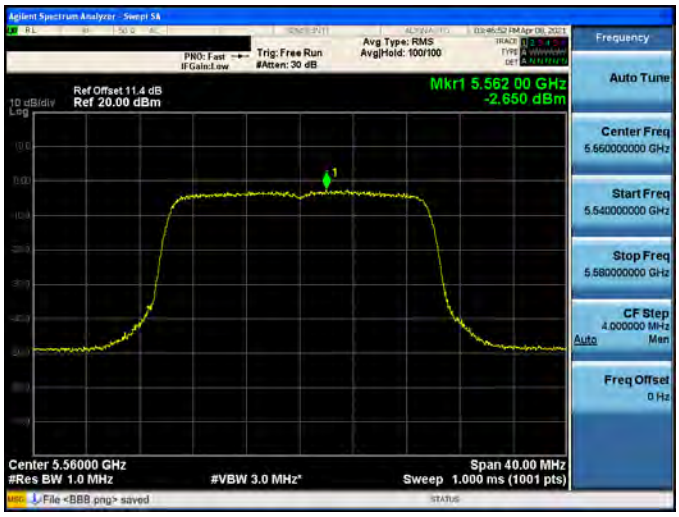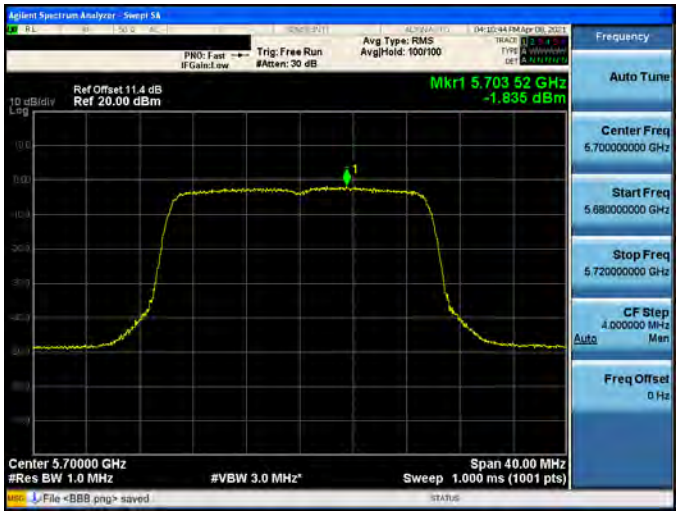Mode 16: IEEE 802.11ax 20 MHz Continuous TX Mode_ANT-3	
5500 MHz	
5560 MHz	
5700 MHz	


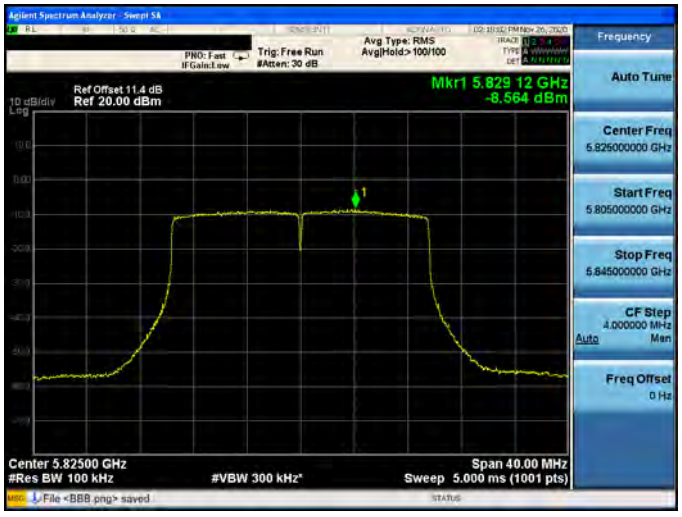
Mode 16: IEEE 802.11ax 20 MHz Continuous TX Mode_ANT-3	
5745 MHz	
5785 MHz	
5825 MHz	

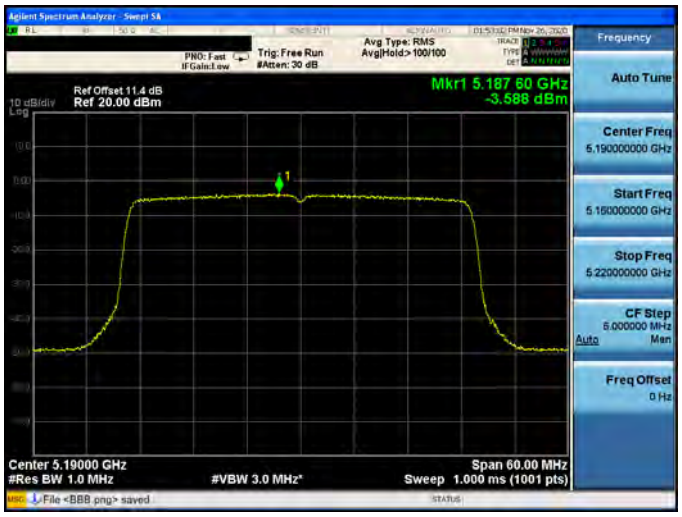
Mode 17: IEEE 802.11ax 40 MHz Continuous TX Mode_ANT-3	
5190 MHz	
5230 MHz	

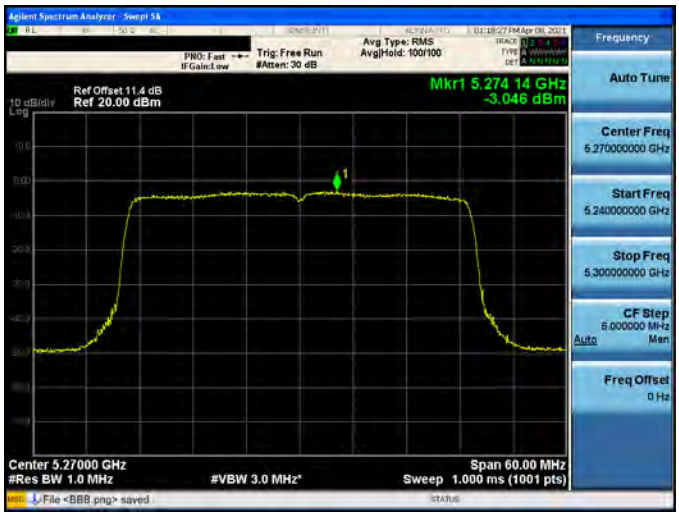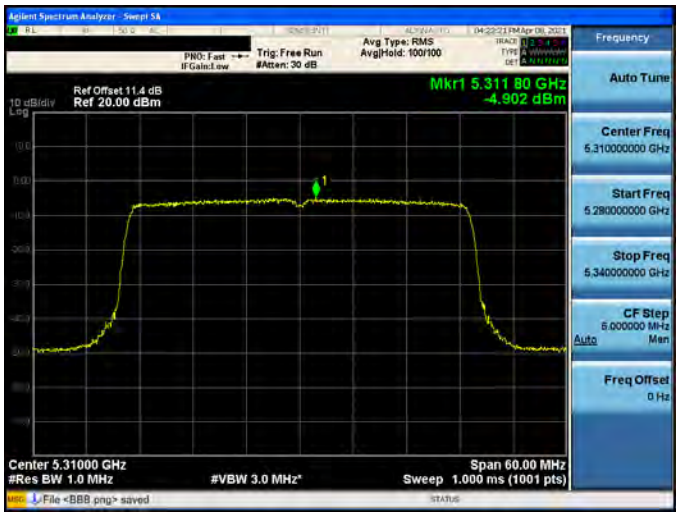Mode 17: IEEE 802.11ax 40 MHz Continuous TX Mode_ANT-3	
5270 MHz	
5310 MHz	

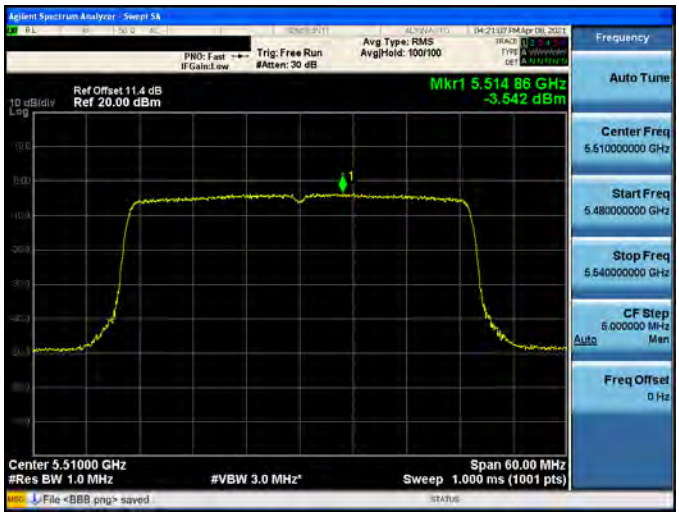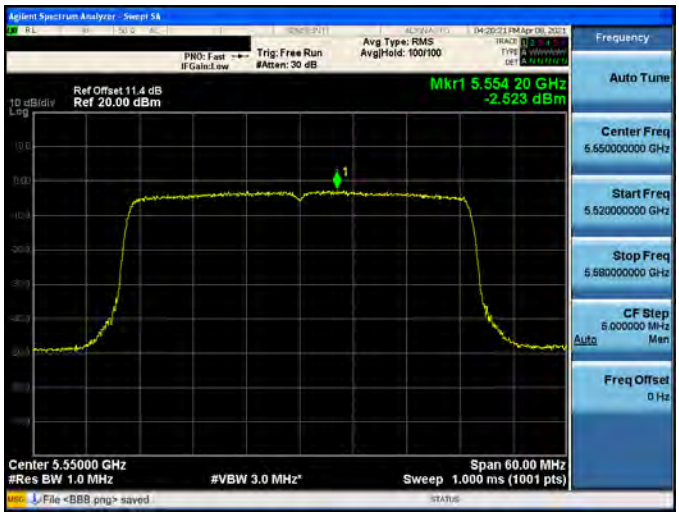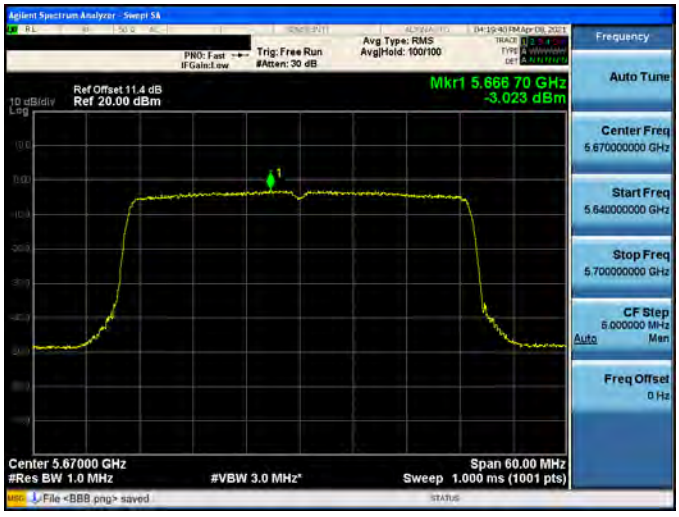Mode 17: IEEE 802.11ax 40 MHz Continuous TX Mode_ANT-3	
5510 MHz	
5550 MHz	
5670 MHz	

Mode 17: IEEE 802.11ax 40 MHz Continuous TX Mode_ANT-3	
5755 MHz	
5795 MHz	

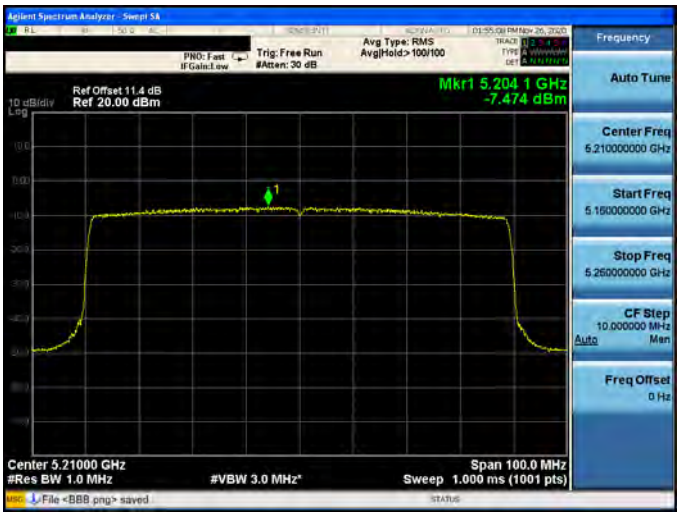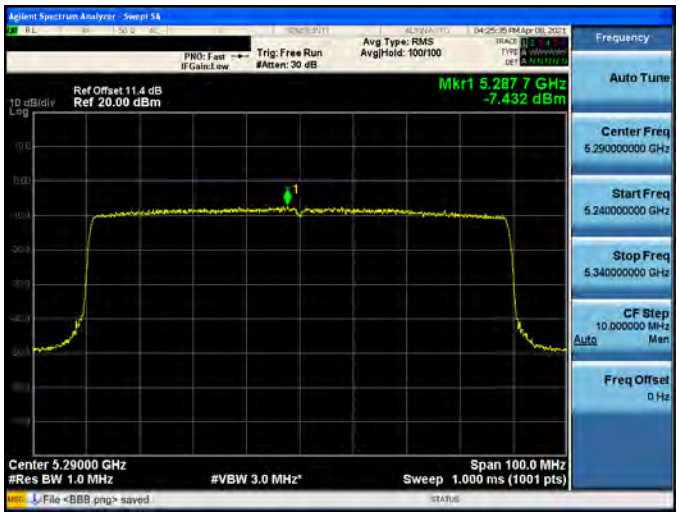Mode 18: IEEE 802.11ax 80 MHz Continuous TX Mode_ANT-3	
5210 MHz	
5290 MHz	

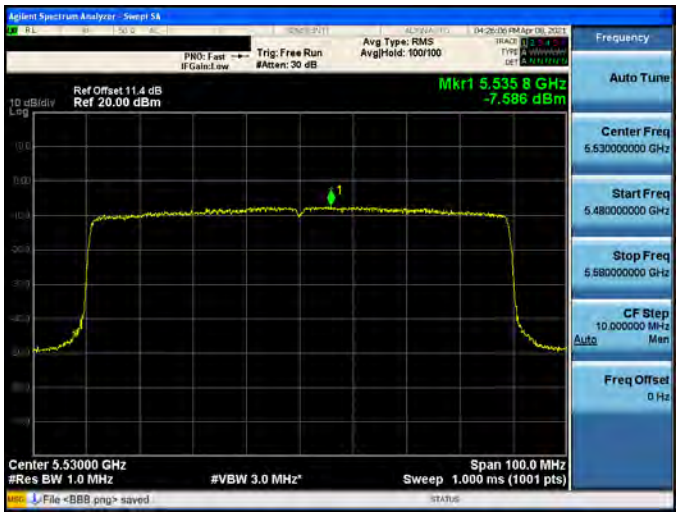Mode 18: IEEE 802.11ax 80 MHz Continuous TX Mode_ANT-3	
5530 MHz	
5775 MHz	

26 dB Bandwidth


操作模式	頻道 (CH)	頻率 (MHz)	26 dB 頻寬量測值 (MHz)			
			ANT-0	ANT-1	ANT-2	ANT-3
Mode 10	36	5180	19.380	19.290	20.700	19.090
	40	5200	19.240	19.550	20.070	19.470
	48	5240	19.310	19.360	23.550	19.260
	52	5260	20.250	20.090	19.980	19.860
	56	5280	20.110	20.080	20.040	19.530
	64	5320	20.000	20.130	20.180	19.830
	100	5500	20.270	20.050	20.120	20.040
	112	5560	20.250	20.050	20.050	19.910
	140	5700	20.100	20.050	19.820	19.520
Mode 11	52	5260	21.100	20.930	20.880	20.440
	56	5280	21.530	20.990	20.990	20.710
	64	5320	21.180	20.920	20.810	20.450
	100	5500	20.990	21.190	20.450	20.690
	112	5560	20.880	20.850	20.570	20.410
	140	5700	21.430	21.100	20.580	20.870
Mode 12	54	5270	41.300	42.010	41.350	40.660
	62	5310	41.490	41.060	41.230	40.640
	102	5510	41.360	41.030	40.870	40.610
	110	5550	41.360	41.210	41.610	40.920
	134	5670	41.200	41.340	40.830	40.760
Mode 13	36	5180	20.790	20.880	23.160	21.080
	40	5200	21.130	20.680	21.850	22.330
	48	5240	20.650	20.630	21.570	22.440
	52	5260	21.230	21.340	20.930	21.020
	56	5280	21.120	21.020	20.850	20.820
	64	5320	21.230	21.350	21.110	20.710
	100	5500	21.120	20.690	21.010	20.890
	112	5560	20.780	21.400	21.140	20.740
	140	5700	21.400	20.780	21.040	20.290
Mode 14	38	5190	41.090	40.940	41.240	40.870
	46	5230	42.940	41.370	43.920	41.440
	54	5270	41.090	40.950	41.180	40.840
	62	5310	41.530	40.400	41.020	40.670
	102	5510	40.970	41.030	41.320	40.520
	110	5550	40.870	40.780	41.230	40.860
	134	5670	41.490	41.040	40.390	40.810
Mode 15	42	5210	81.940	81.840	81.820	81.330
	58	5290	81.900	80.940	82.710	81.390
	106	5530	81.800	81.240	81.660	81.150



操作模式	頻道 (CH)	頻率 (MHz)	26 dB 頻寬量測值 (MHz)			
			ANT-0	ANT-1	ANT-2	ANT-3
Mode 16	36	5180	21.150	21.410	21.060	20.690
	40	5200	22.110	21.390	22.480	20.640
	48	5240	21.270	21.510	21.900	21.170
	52	5260	21.000	21.490	21.150	21.550
	56	5280	21.560	21.810	21.560	21.560
	64	5320	21.550	21.660	21.330	21.300
	100	5500	21.480	21.550	21.230	21.470
	112	5560	21.620	21.390	21.530	21.510
	140	5700	21.530	21.740	21.410	21.760
Mode 17	38	5190	41.970	42.190	41.270	42.440
	46	5230	42.850	42.040	42.270	43.400
	54	5270	41.820	41.940	41.760	41.700
	62	5310	41.050	41.650	41.370	42.010
	102	5510	41.150	41.740	41.560	41.650
	110	5550	41.380	41.210	41.450	41.800
	134	5670	41.320	41.540	41.810	41.550
Mode 18	42	5210	81.120	82.430	82.220	82.290
	58	5290	82.280	82.070	81.590	82.130
	106	5530	82.360	81.830	82.120	81.470




Beamforming on



操作模式	頻道 (CH)	頻率 (MHz)	26 dB 頻寬量測值 (MHz)			
			ANT-0	ANT-1	ANT-2	ANT-3
Mode 11	52	5260	21.100	20.960	20.960	20.670
	56	5280	21.050	21.220	20.930	20.310
	64	5320	20.940	21.050	21.030	21.010
	100	5500	20.820	20.910	20.650	20.640
	112	5560	21.280	20.520	20.880	20.640
	140	5700	21.190	20.910	20.640	20.820
Mode 12	54	5270	40.950	41.290	40.750	40.490
	62	5310	40.680	40.810	40.960	40.880
	102	5510	40.940	41.240	41.140	40.880
	110	5550	40.780	41.500	41.000	40.470
	134	5670	41.770	40.970	41.130	40.770
Mode 13	36	5180	20.730	20.470	20.120	20.700
	40	5200	20.270	20.560	20.560	20.590
	48	5240	20.710	20.610	20.500	20.520
	52	5260	20.960	20.930	21.270	21.010
	56	5280	21.130	20.960	21.530	20.670
	64	5320	20.990	21.200	21.190	20.630
	100	5500	21.020	20.740	20.840	21.180
	112	5560	21.100	20.850	21.390	21.140
	140	5700	21.080	20.710	21.360	20.730
Mode 14	38	5190	41.400	40.810	40.960	41.150
	46	5230	41.570	41.340	41.360	40.900
	54	5270	41.440	40.720	41.330	40.870
	62	5310	41.270	40.870	40.890	40.410
	102	5510	41.220	40.950	41.130	40.240
	110	5550	41.160	40.430	40.770	40.400
	134	5670	41.050	40.960	40.890	40.550
Mode 15	42	5210	81.890	80.820	82.080	81.640
	58	5290	81.160	80.750	81.400	80.780
	106	5530	81.770	81.310	81.240	81.430



操作模式	頻道 (CH)	頻率 (MHz)	26 dB 頻寬量測值 (MHz)			
			ANT-0	ANT-1	ANT-2	ANT-3
Mode 16	36	5180	21.390	21.010	21.290	21.180
	40	5200	20.880	21.030	21.220	21.100
	48	5240	21.330	21.120	21.070	20.900
	52	5260	21.650	21.560	21.390	21.320
	56	5280	21.270	21.690	21.650	21.320
	64	5320	21.470	21.930	21.240	21.490
	100	5500	21.490	21.800	21.460	21.690
	112	5560	21.260	21.590	21.550	21.010
	140	5700	21.620	21.560	21.100	21.750
Mode 17	38	5190	41.650	41.280	41.250	41.470
	46	5230	42.060	41.810	41.740	41.490
	54	5270	41.550	42.050	41.420	41.390
	62	5310	42.000	40.960	41.590	41.890
	102	5510	42.170	41.030	41.820	41.470
	110	5550	41.390	41.540	41.720	41.490
	134	5670	41.010	41.630	41.560	41.600
Mode 18	42	5210	82.350	81.070	81.900	82.540
	58	5290	81.460	81.110	81.630	82.530
	106	5530	81.770	82.410	81.490	81.560

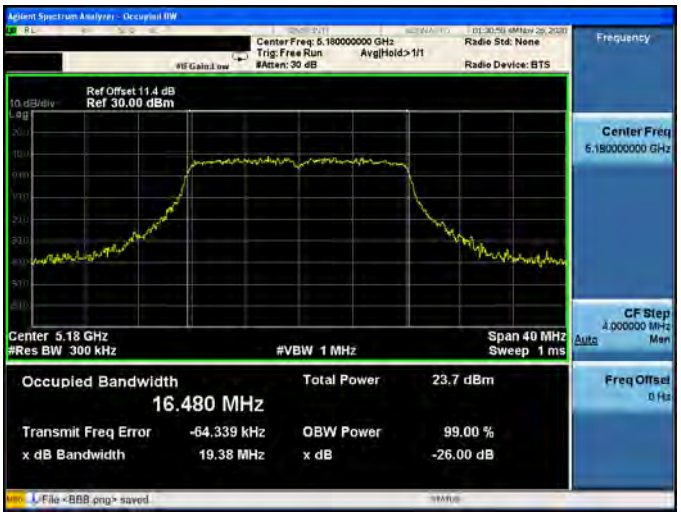Mode 10: IEEE 802.11a Continuous TX Mode_ANT-0	
5180 MHz	
5200 MHz	
5240 MHz	

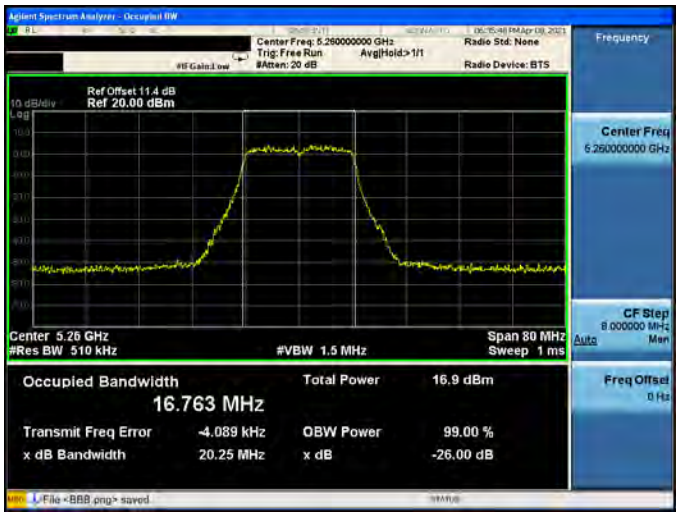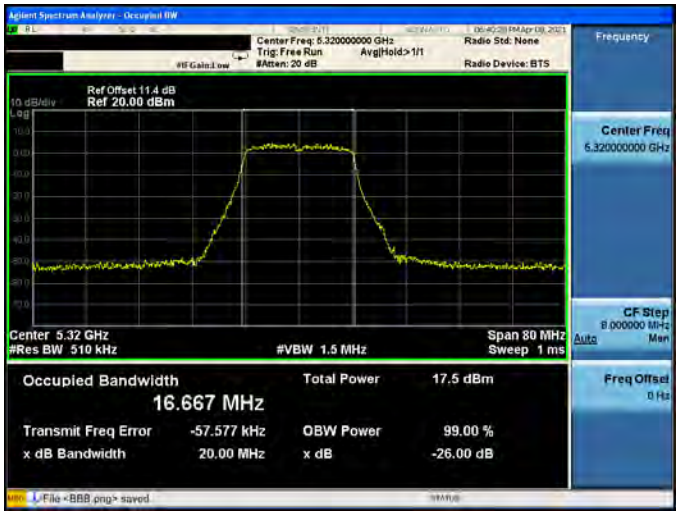Mode 10: IEEE 802.11a Continuous TX Mode_ANT-0	
5260 MHz	
5280 MHz	
5320 MHz	

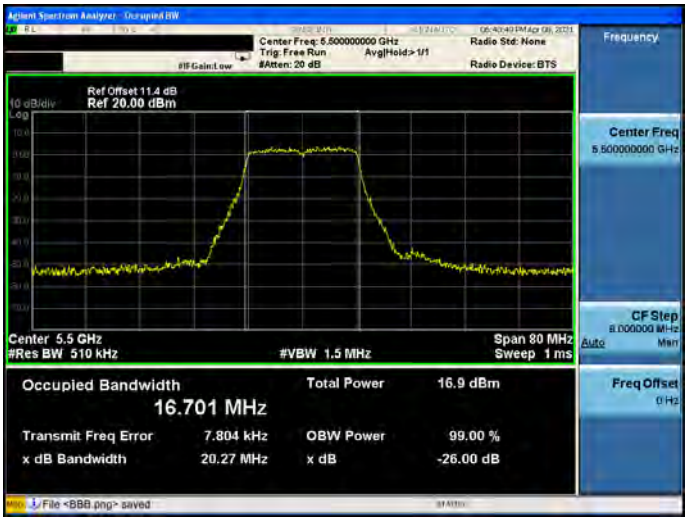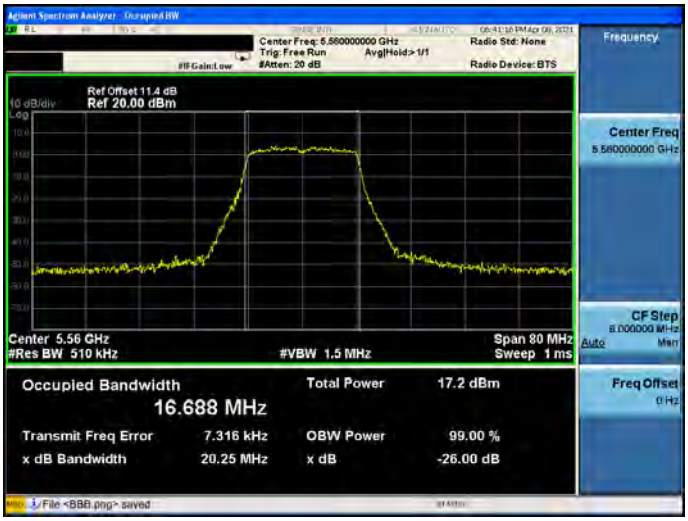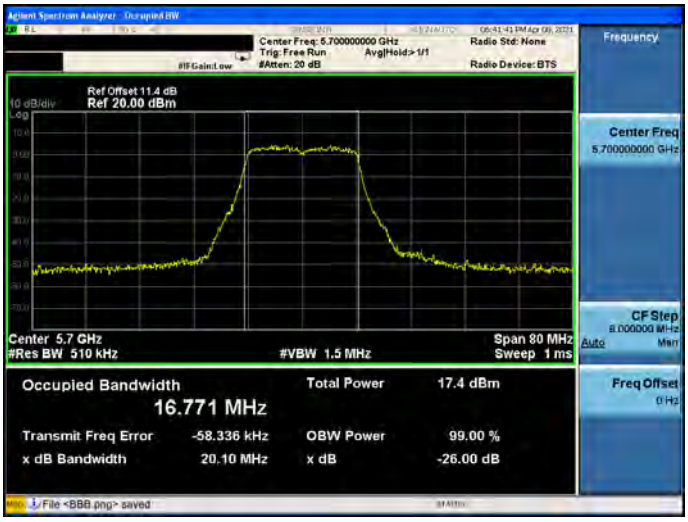
Mode 10: IEEE 802.11a Continuous TX Mode_ANT-0	
5500 MHz	
5560 MHz	
5700 MHz	


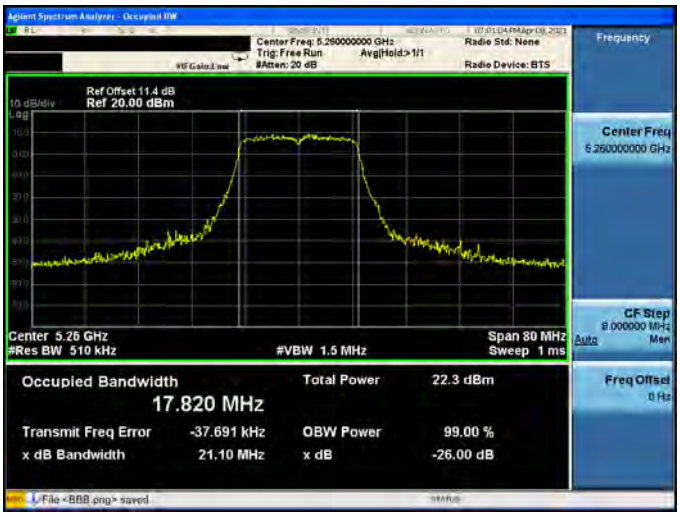
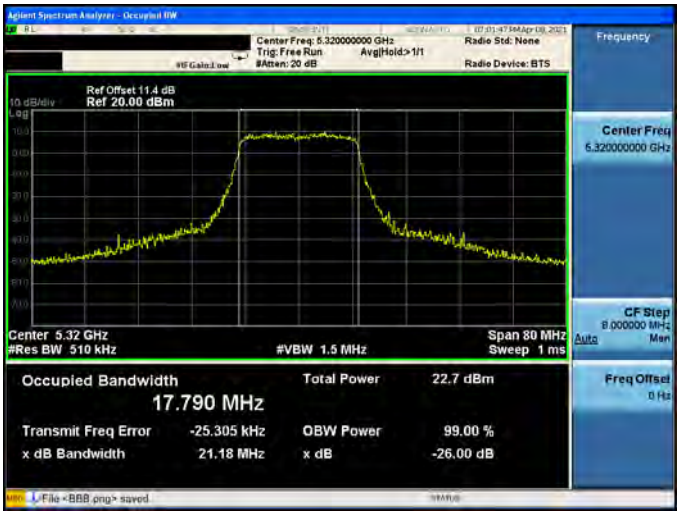
Mode 11: IEEE 802.11n 5 GHz 20 MHz Continuous TX Mode_ANT-0	
5260 MHz	
5280 MHz	
5320 MHz	

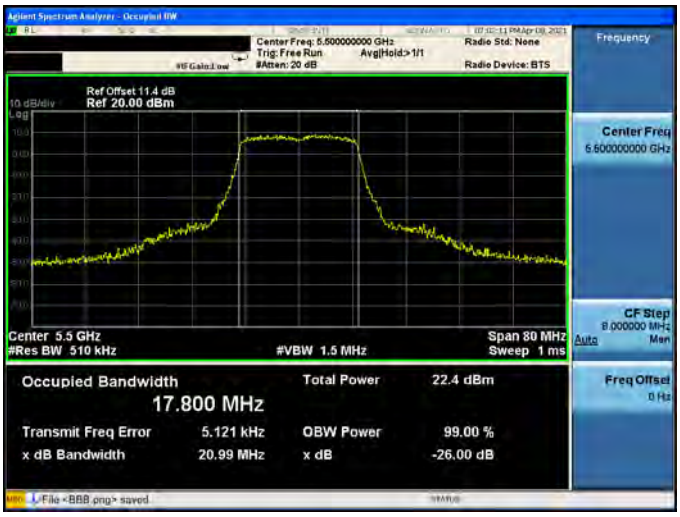
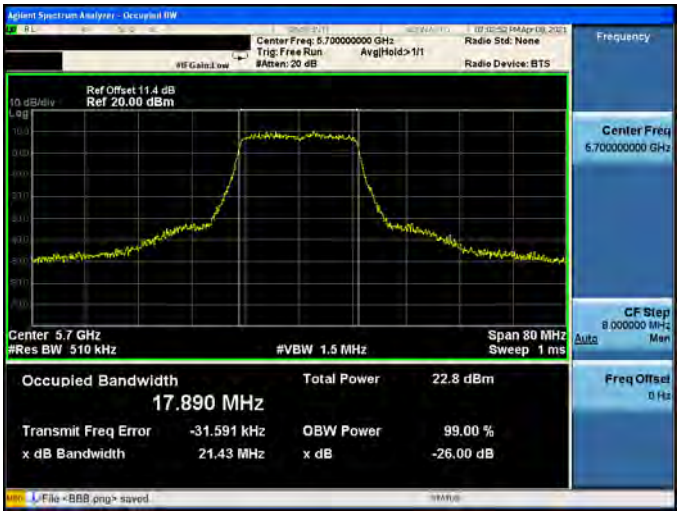
Mode 11: IEEE 802.11n 5 GHz 20 MHz Continuous TX Mode_ANT-0	
5500 MHz	
5560 MHz	
5700 MHz	


Mode 12: IEEE 802.11n 5 GHz 40 MHz Continuous TX Mode_ANT-0	
5270 MHz	
5310 MHz	

Mode 12: IEEE 802.11n 5 GHz 40 MHz Continuous TX Mode_ANT-0	
5510 MHz	
5550 MHz	
5670 MHz	

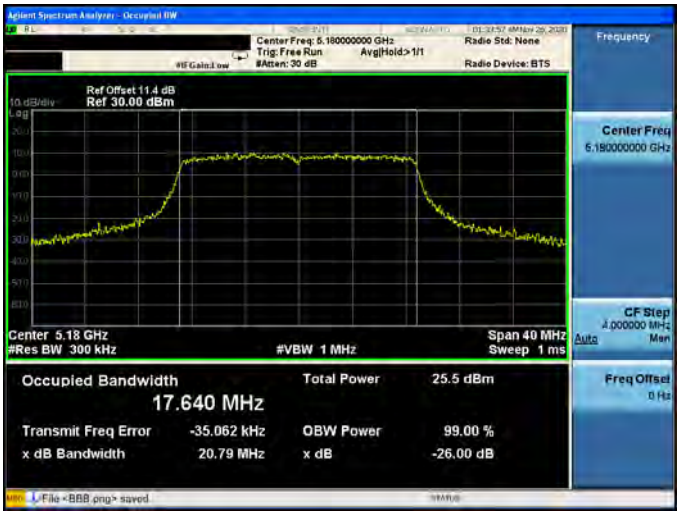Mode 13: IEEE 802.11ac 20 MHz Continuous TX Mode_ ANT-0	
5180 MHz	
5200 MHz	
5240 MHz	

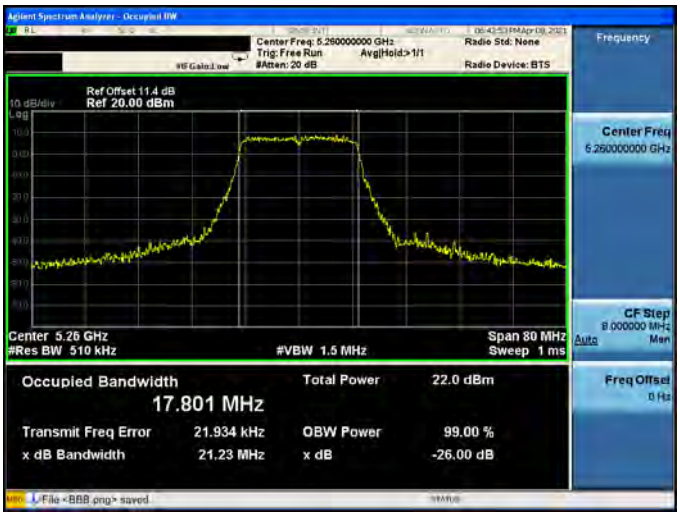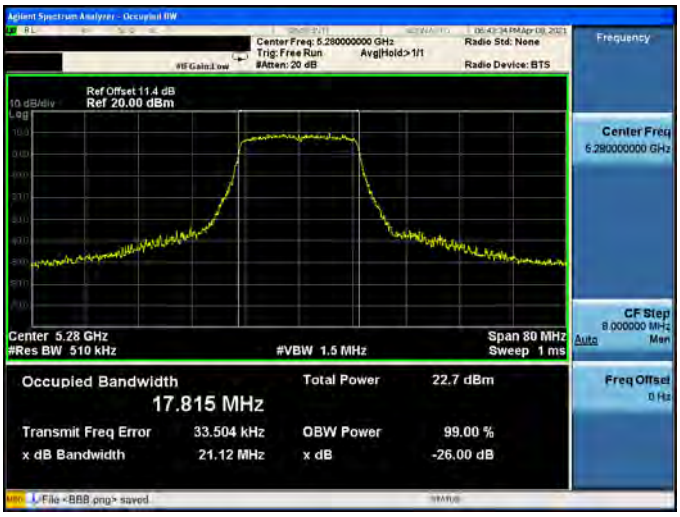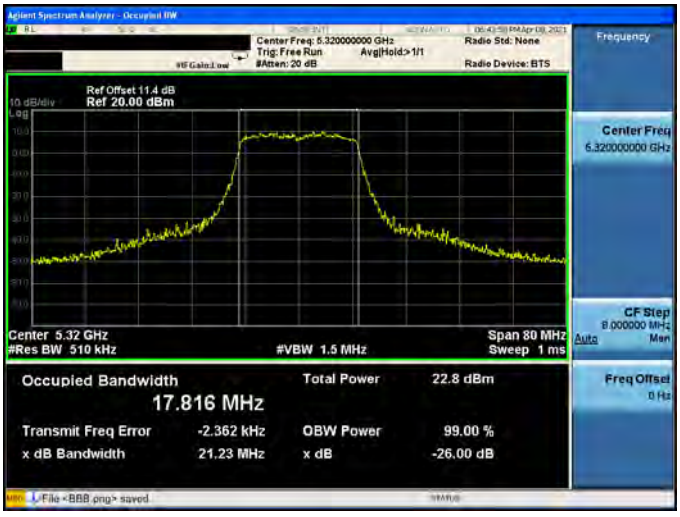
Mode 13: IEEE 802.11ac 20 MHz Continuous TX Mode_ANT-0	
5260 MHz	
5280 MHz	
5320 MHz	

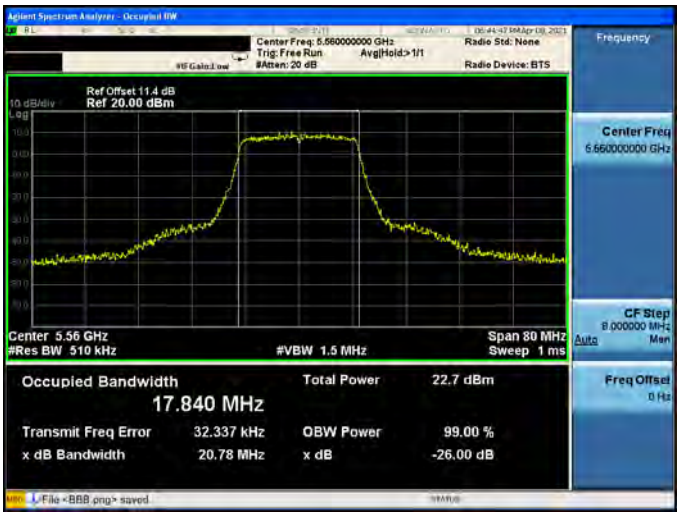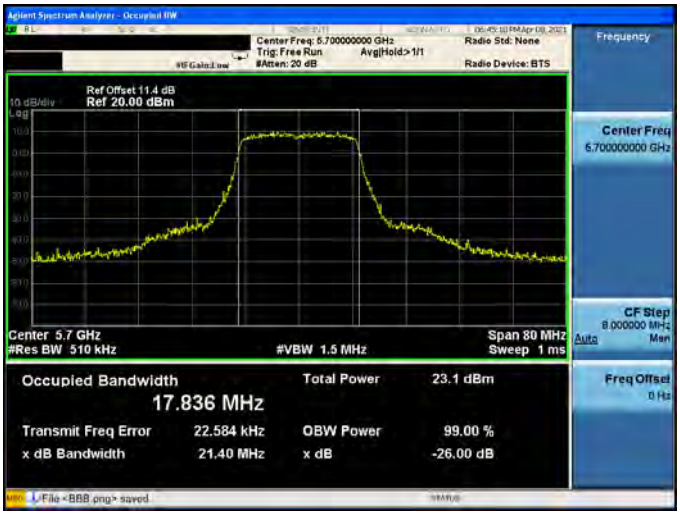
Mode 13: IEEE 802.11ac 20 MHz Continuous TX Mode_ANT-0	
5500 MHz	
5560 MHz	
5700 MHz	



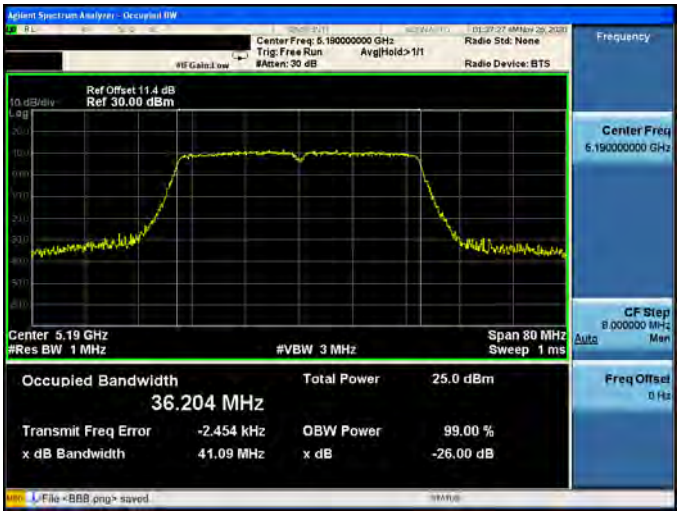
Mode 14: IEEE 802.11ac 40 MHz Continuous TX Mode_ ANT-0	
5190 MHz	
5230 MHz	



Mode 14: IEEE 802.11ac 40 MHz Continuous TX Mode_ANT-0	
5270 MHz	
5310 MHz	

Mode 14: IEEE 802.11ac 40 MHz Continuous TX Mode_ANT-0	
5510 MHz	
5550 MHz	
5670 MHz	

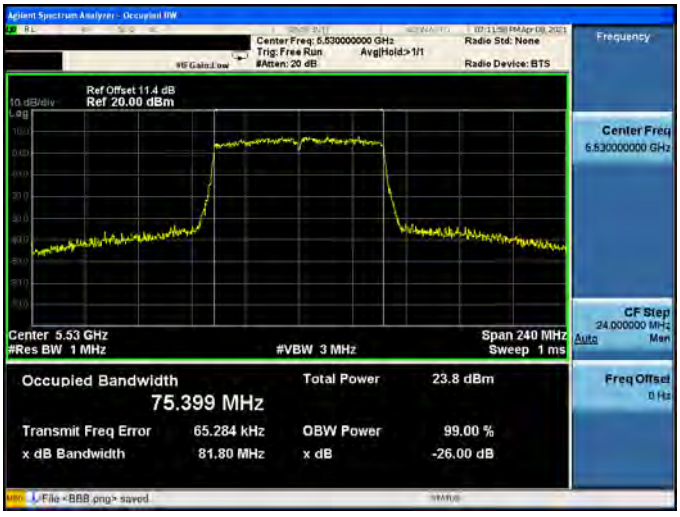Mode 15: IEEE 802.11ac 80 MHz Continuous TX Mode_ANT-0	
5210 MHz	
5290 MHz	
5530 MHz	

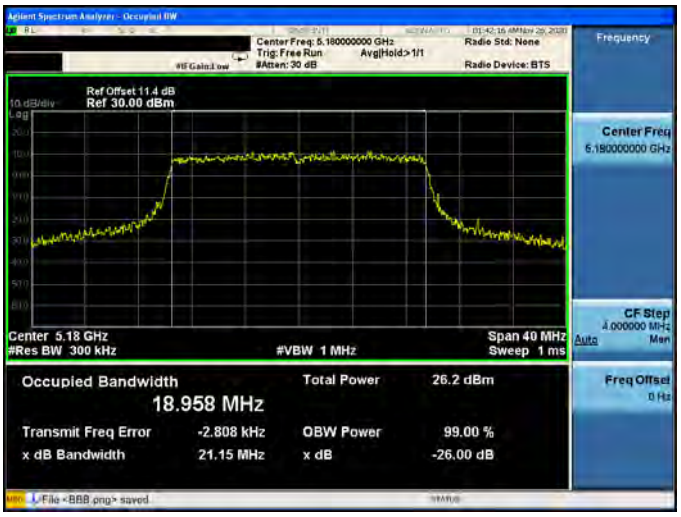Mode 16: IEEE 802.11ax 20 MHz Continuous TX Mode_ANT-0	
5180 MHz	
5200 MHz	
5240 MHz	

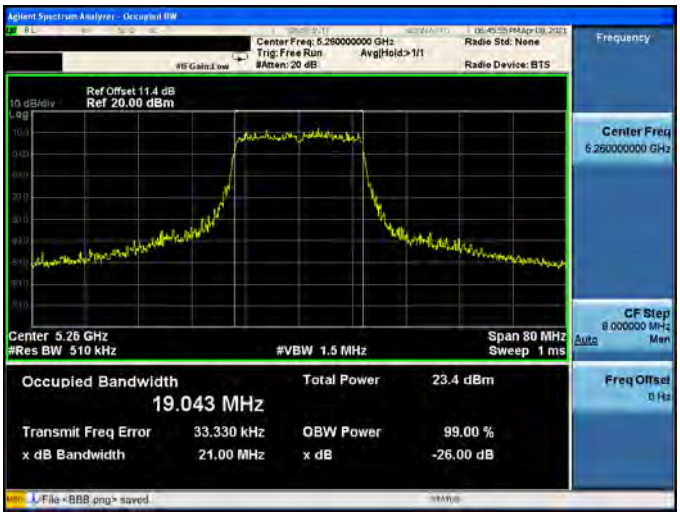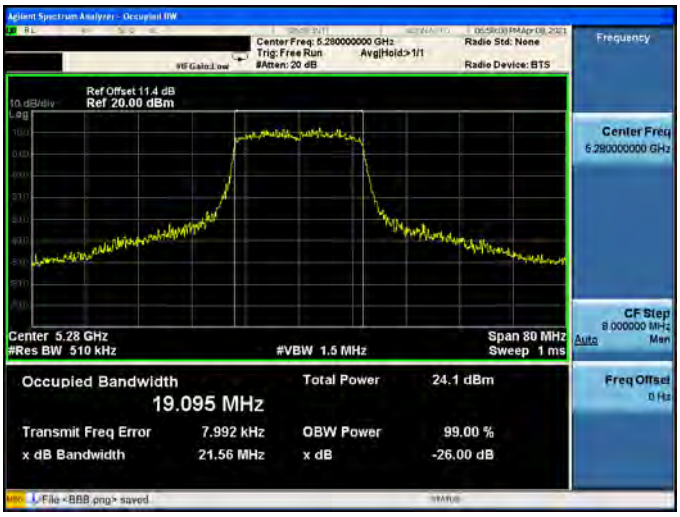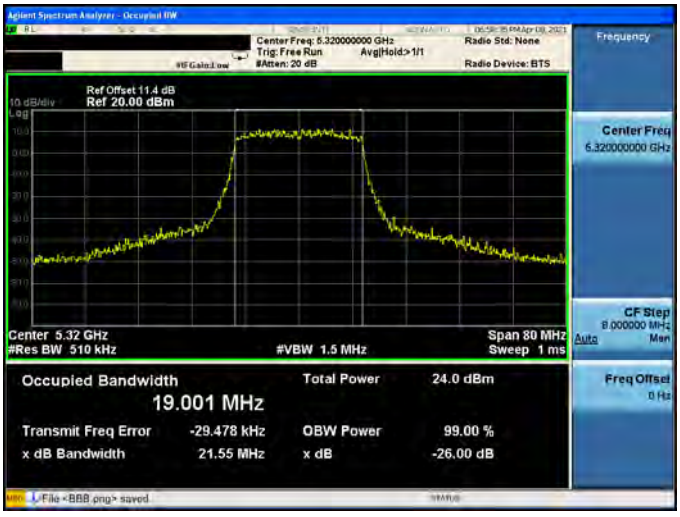Mode 16: IEEE 802.11ax 20 MHz Continuous TX Mode_ANT-0	
5260 MHz	
5280 MHz	
5320 MHz	

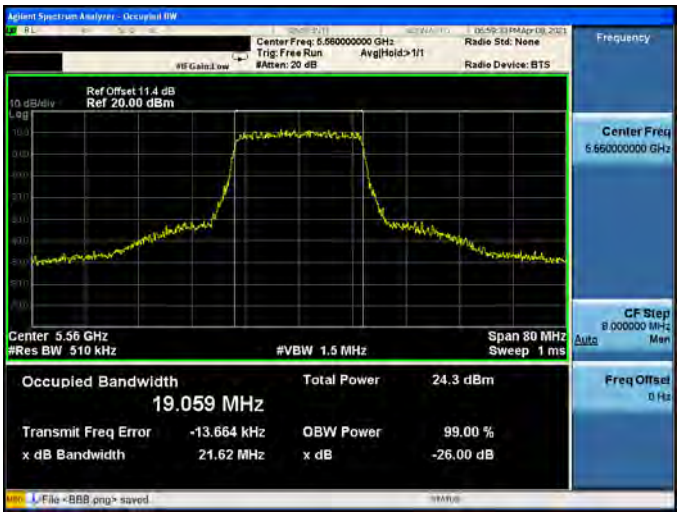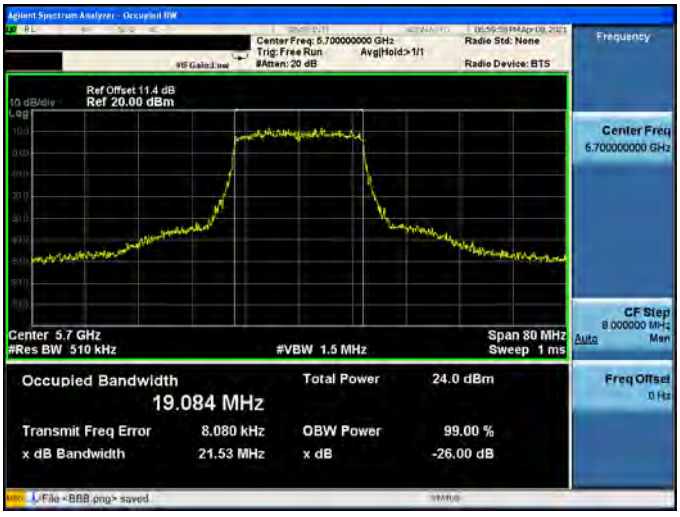
Mode 16: IEEE 802.11ax 20 MHz Continuous TX Mode_ANT-0	
5500 MHz	
5560 MHz	
5700 MHz	


Mode 17: IEEE 802.11ax 40 MHz Continuous TX Mode_ANT-0	
5190 MHz	
5230 MHz	




Mode 17: IEEE 802.11ax 40 MHz Continuous TX Mode_ANT-0	
5270 MHz	
5310 MHz	




Mode 17: IEEE 802.11ax 40 MHz Continuous TX Mode_ANT-0	
5510 MHz	
5550 MHz	
5670 MHz	



Mode 18: IEEE 802.11ax 80 MHz Continuous TX Mode_ANT-0	
5210 MHz	
5290 MHz	
5530 MHz	

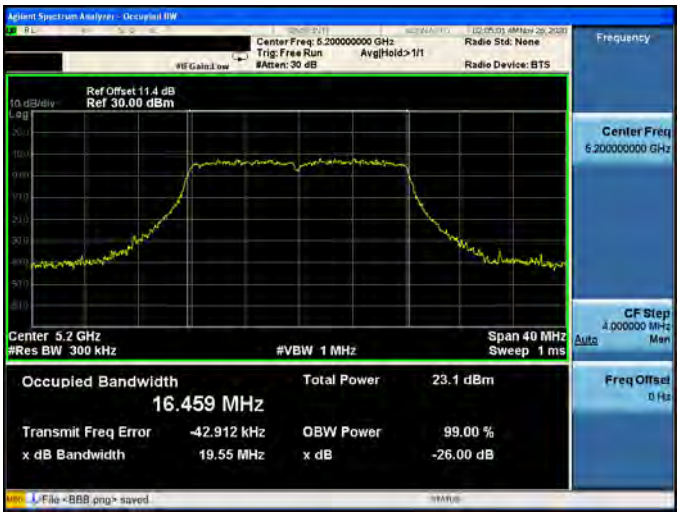Mode 10: IEEE 802.11a Continuous TX Mode_ANT-1	
5180 MHz	
5200 MHz	
5240 MHz	

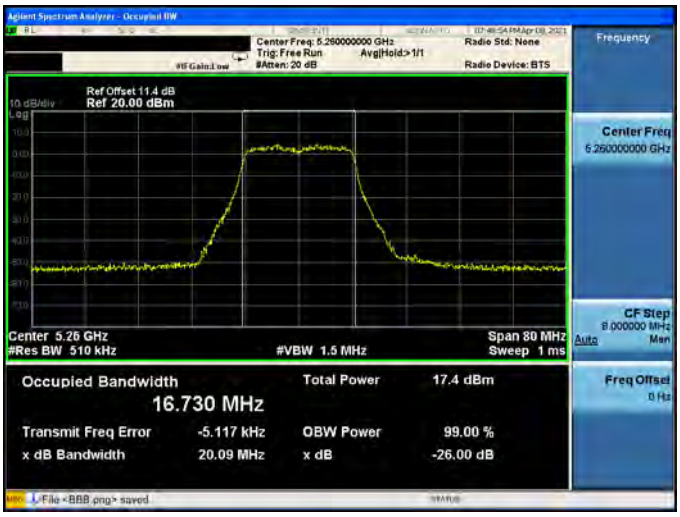
Mode 10: IEEE 802.11a Continuous TX Mode_ANT-1	
5260 MHz	
5280 MHz	
5320 MHz	

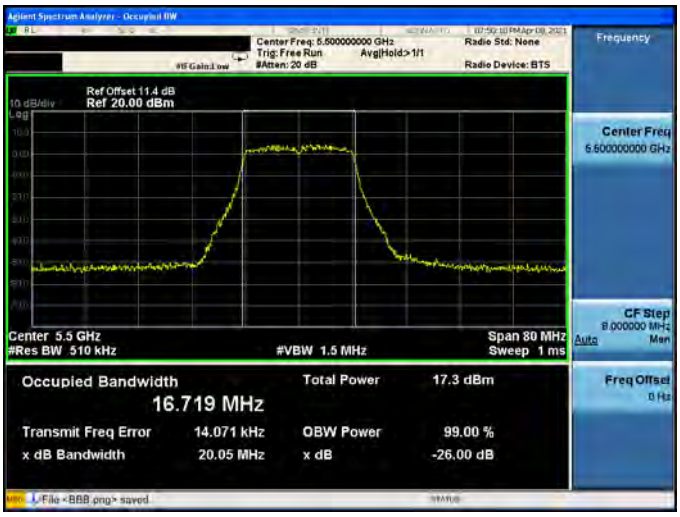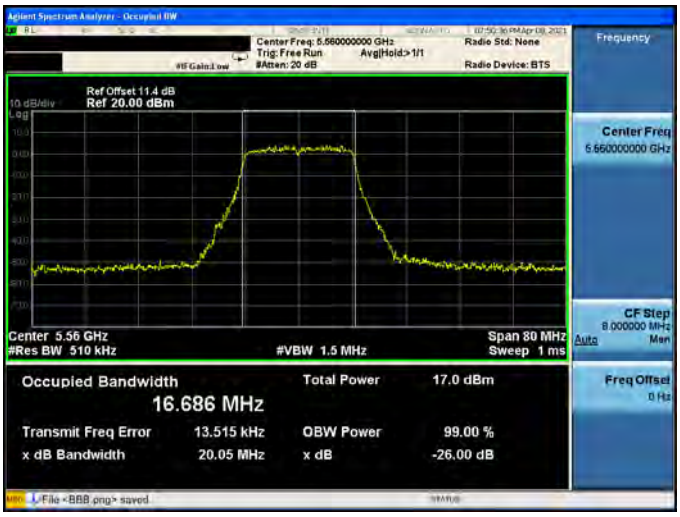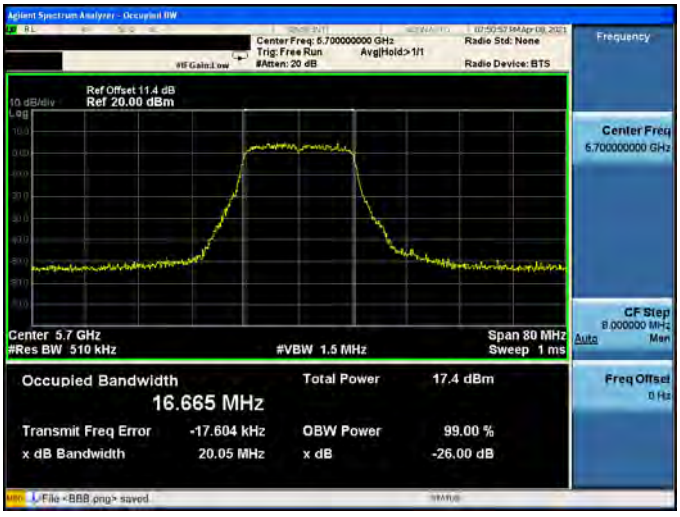Mode 10: IEEE 802.11a Continuous TX Mode_ANT-1	
5500 MHz	
5560 MHz	
5700 MHz	

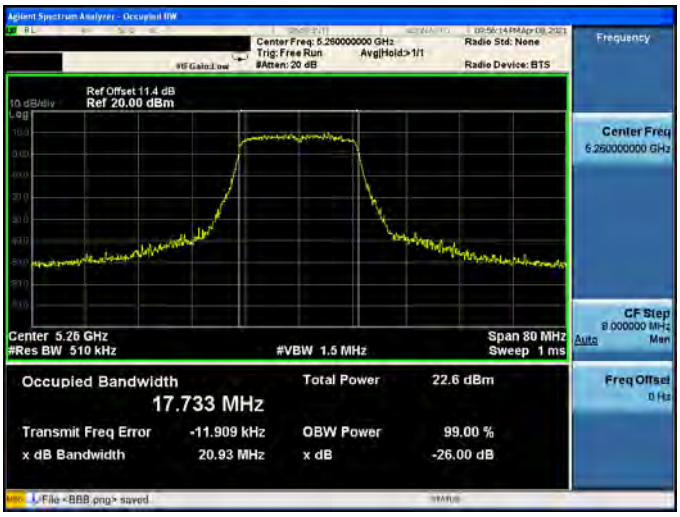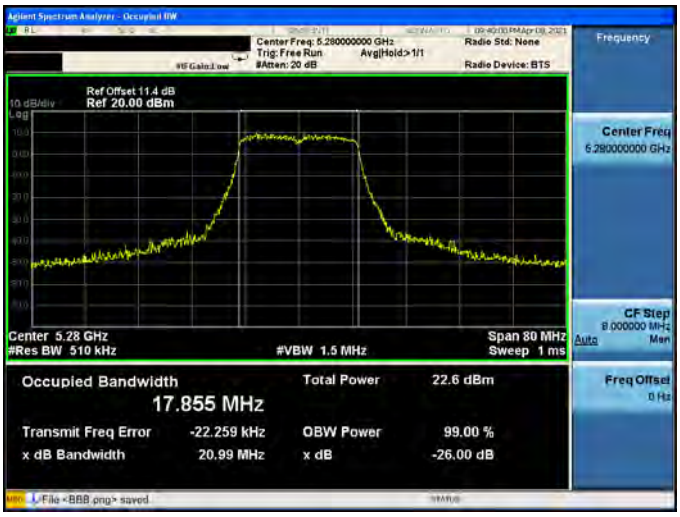
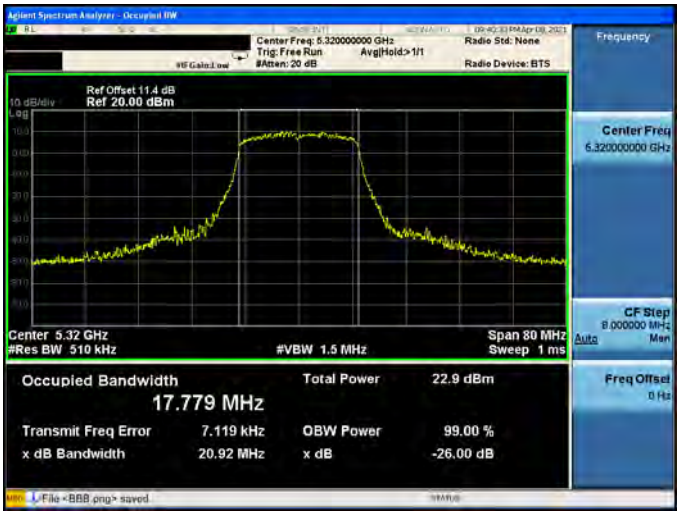
Mode 11: IEEE 802.11n 5 GHz 20 MHz Continuous TX Mode_ANT-1	
5260 MHz	
5280 MHz	
5320 MHz	

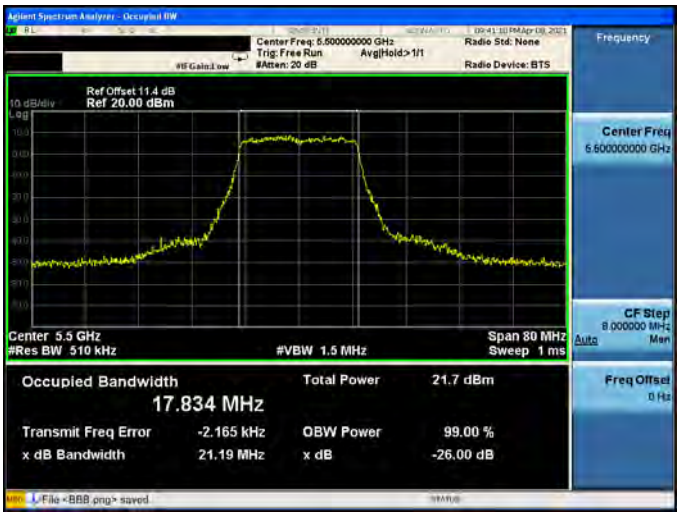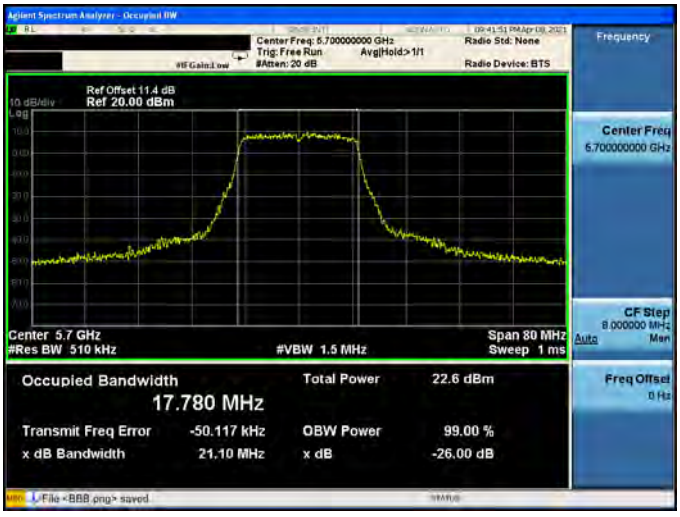
Mode 11: IEEE 802.11n 5 GHz 20 MHz Continuous TX Mode_ANT-1	
5500 MHz	
5560 MHz	
5700 MHz	

Mode 12: IEEE 802.11n 5 GHz 40 MHz Continuous TX Mode_ANT-1	
5270 MHz	
5310 MHz	

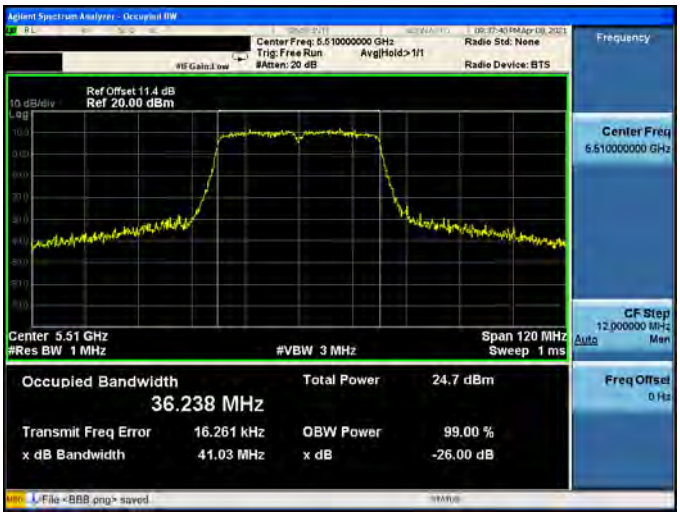
Mode 12: IEEE 802.11n 5 GHz 40 MHz Continuous TX Mode_ANT-1	
5510 MHz	
5550 MHz	
5670 MHz	

Mode 13: IEEE 802.11ac 20 MHz Continuous TX Mode_ ANT-1	
5180 MHz	
5200 MHz	
5240 MHz	

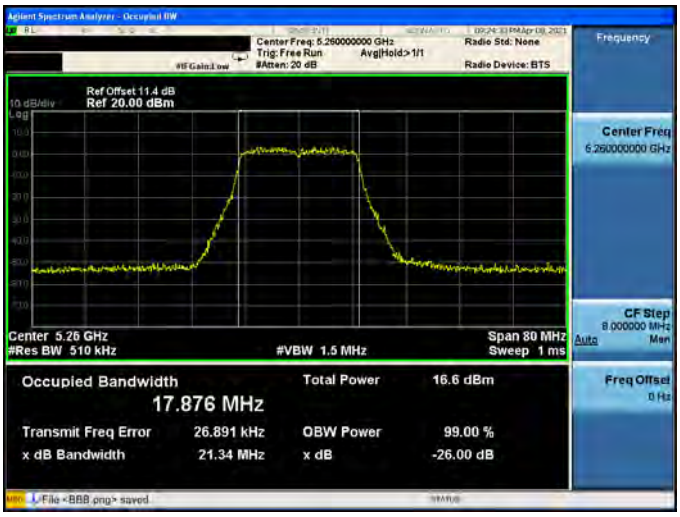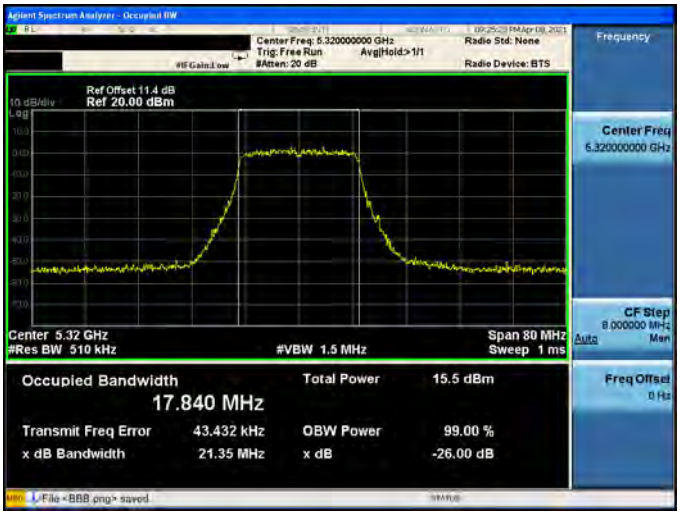Mode 13: IEEE 802.11ac 20 MHz Continuous TX Mode_ANT-1	
5260 MHz	
5280 MHz	
5320 MHz	


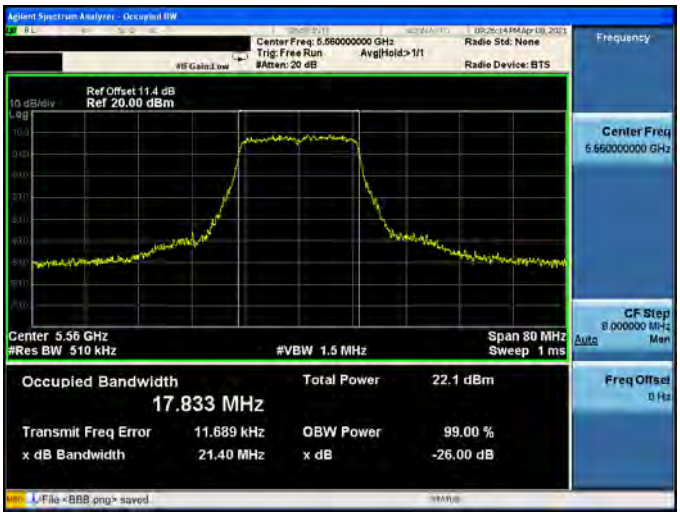
Mode 13: IEEE 802.11ac 20 MHz Continuous TX Mode_ANT-1	
5500 MHz	
5560 MHz	
5700 MHz	




Mode 14: IEEE 802.11ac 40 MHz Continuous TX Mode_ ANT-1	
5190 MHz	
5230 MHz	

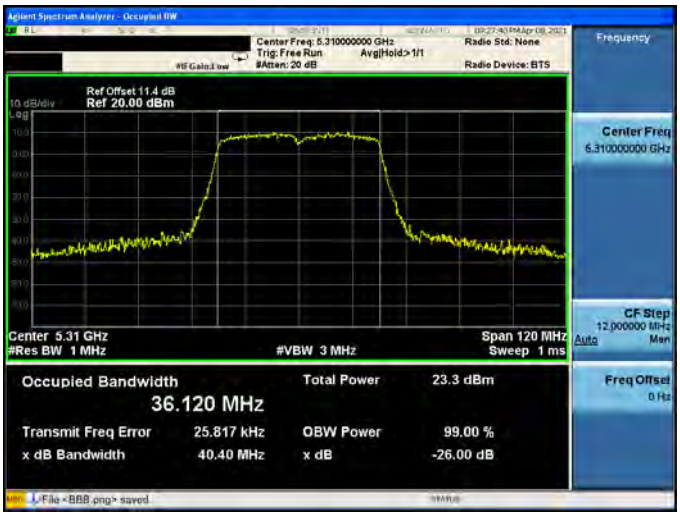
Mode 14: IEEE 802.11ac 40 MHz Continuous TX Mode_ANT-1	
5270 MHz	
5310 MHz	

Mode 14: IEEE 802.11ac 40 MHz Continuous TX Mode_ANT-1	
5510 MHz	
5550 MHz	
5670 MHz	


Mode 15: IEEE 802.11ac 80 MHz Continuous TX Mode_ANT-1	
5210 MHz	
5290 MHz	
5530 MHz	

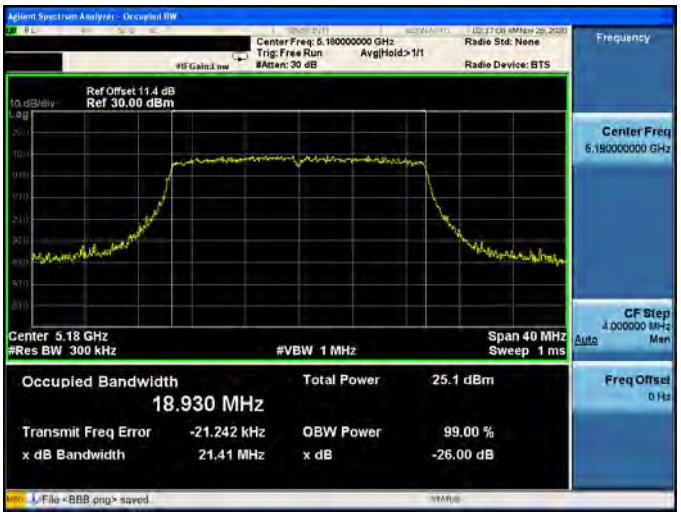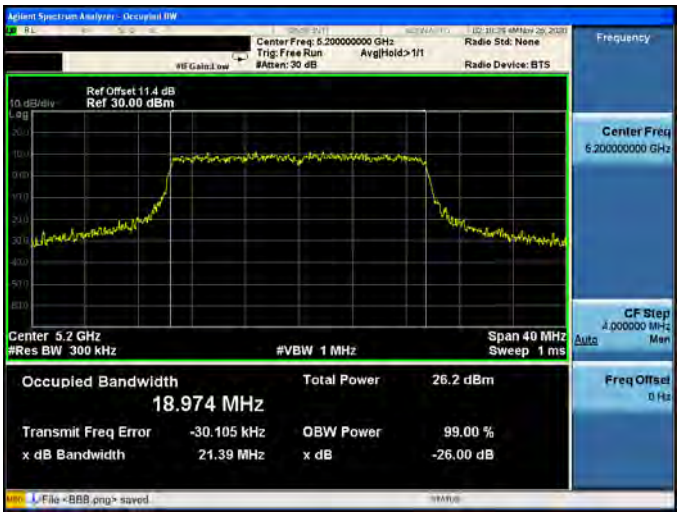Mode 16: IEEE 802.11ax 20 MHz Continuous TX Mode_ANT-1	
5180 MHz	
5200 MHz	
5240 MHz	

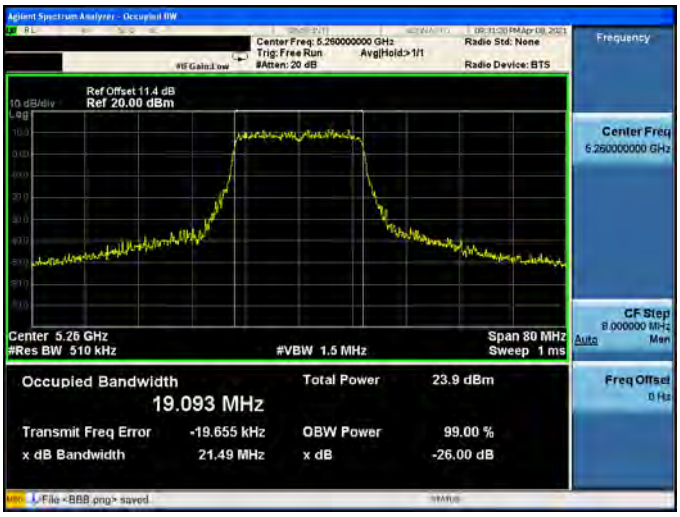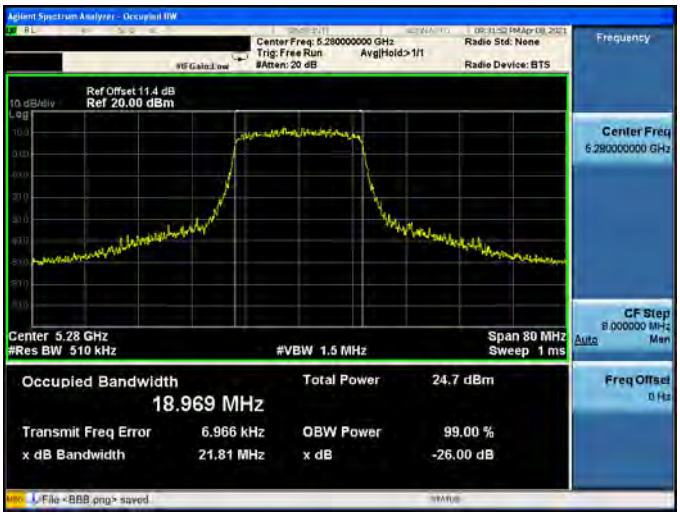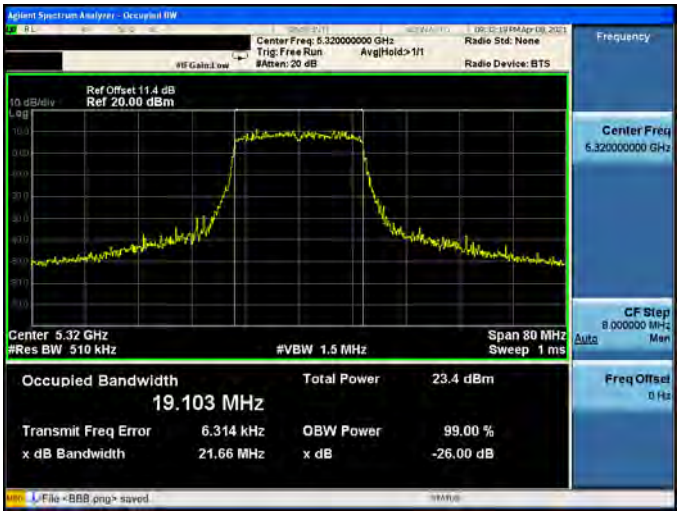
Mode 16: IEEE 802.11ax 20 MHz Continuous TX Mode_ANT-1	
5260 MHz	
5280 MHz	
5320 MHz	


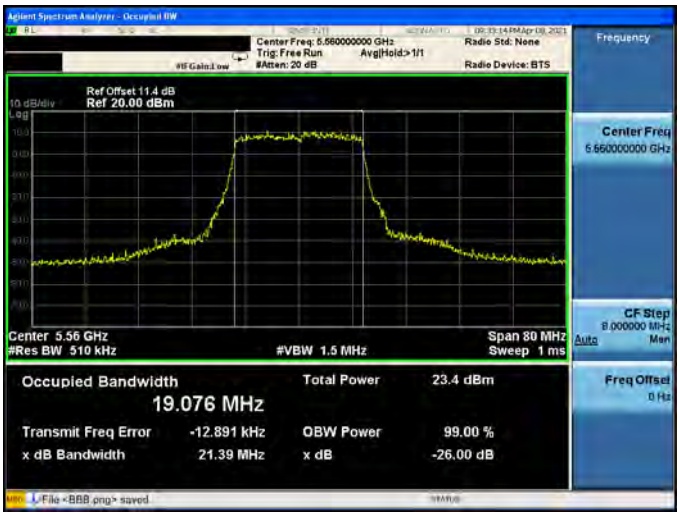
Mode 16: IEEE 802.11ax 20 MHz Continuous TX Mode_ANT-1	
5500 MHz	
5560 MHz	
5700 MHz	



Mode 17: IEEE 802.11ax 40 MHz Continuous TX Mode_ANT-1	
5190 MHz	
5230 MHz	


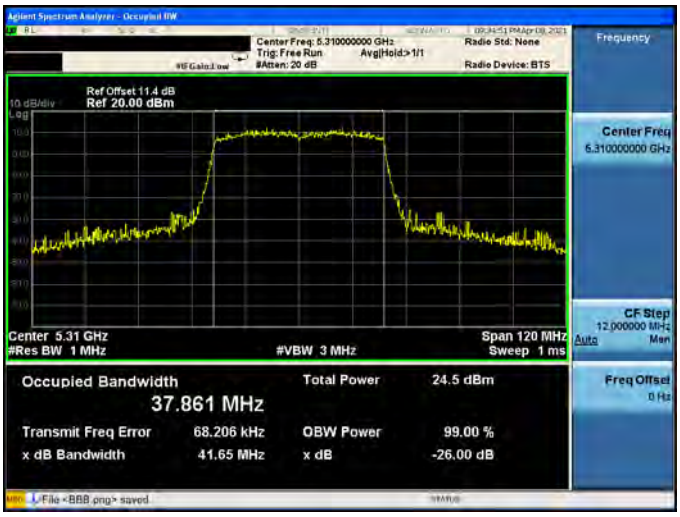
Mode 17: IEEE 802.11ax 40 MHz Continuous TX Mode_ANT-1	
5270 MHz	
5310 MHz	



Mode 17: IEEE 802.11ax 40 MHz Continuous TX Mode_ANT-1	
5510 MHz	
5550 MHz	
5670 MHz	


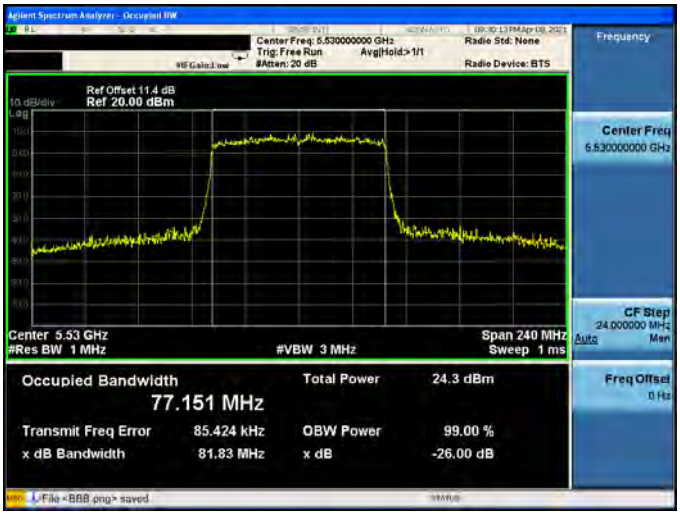
Mode 18: IEEE 802.11ax 80 MHz Continuous TX Mode_ANT-1	
5210 MHz	
5290 MHz	
5530 MHz	

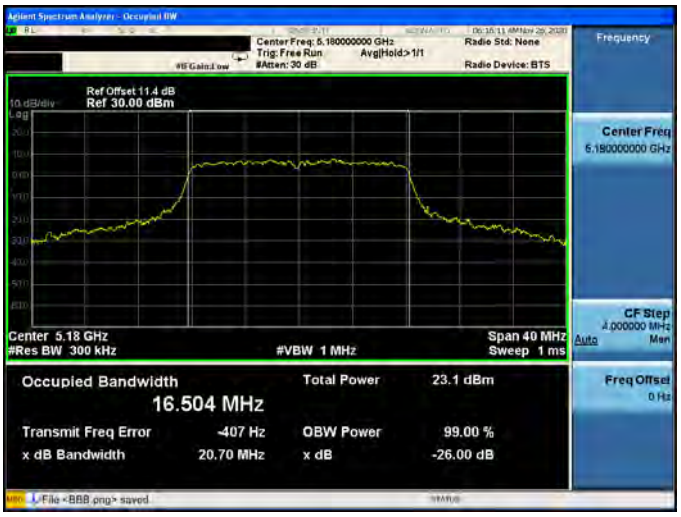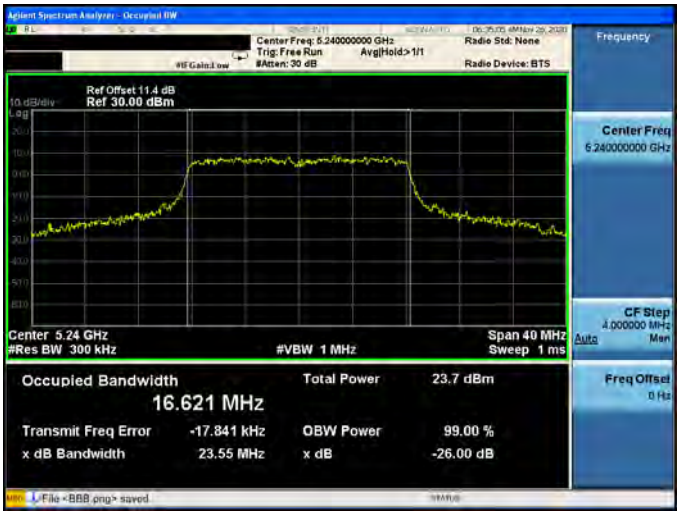Mode 10: IEEE 802.11a Continuous TX Mode_ANT-2	
5180 MHz	
5200 MHz	
5240 MHz	

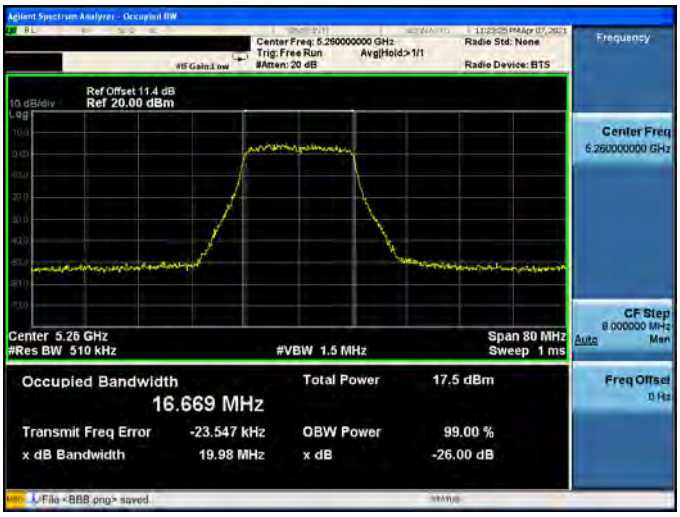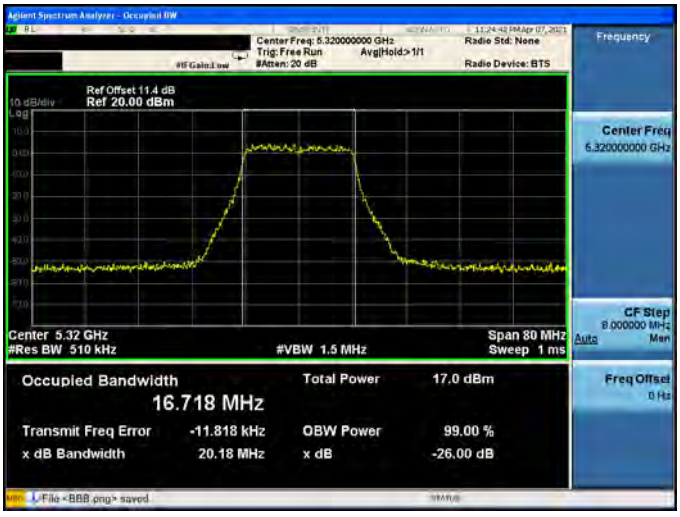Mode 10: IEEE 802.11a Continuous TX Mode_ANT-2	
5260 MHz	
5280 MHz	
5320 MHz	

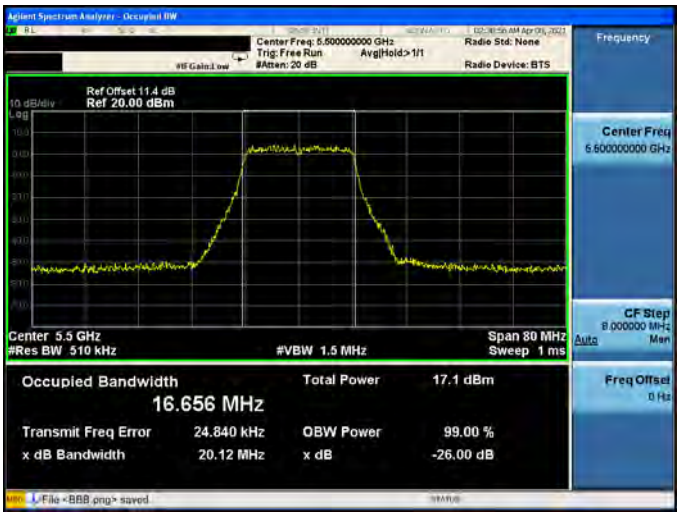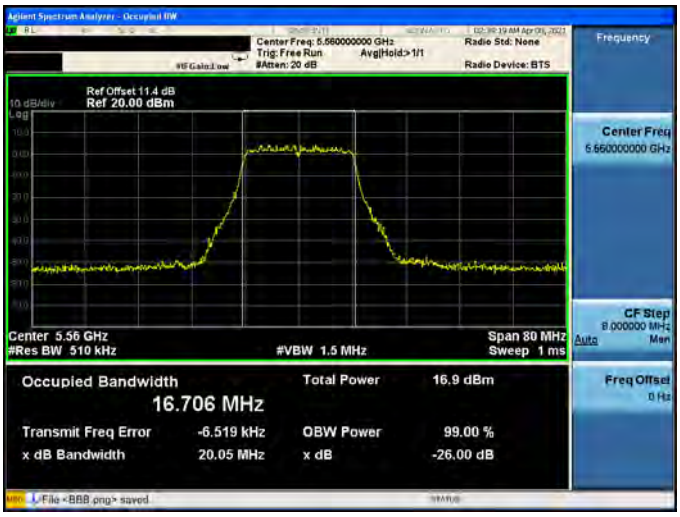Mode 10: IEEE 802.11a Continuous TX Mode_ANT-2	
5500 MHz	
5560 MHz	
5700 MHz	


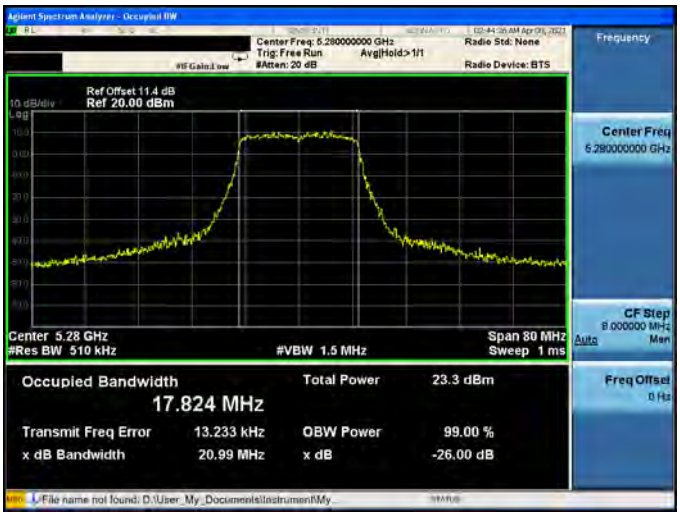
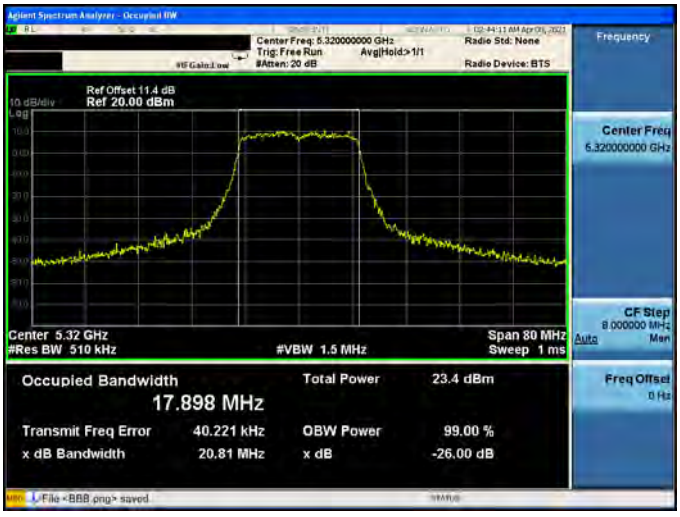
Mode 11: IEEE 802.11n 5 GHz 20 MHz Continuous TX Mode_ANT-2	
5260 MHz	
5280 MHz	
5320 MHz	

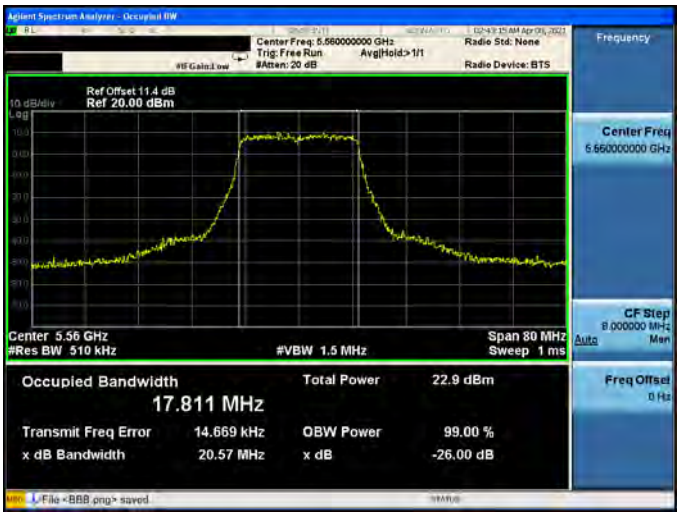
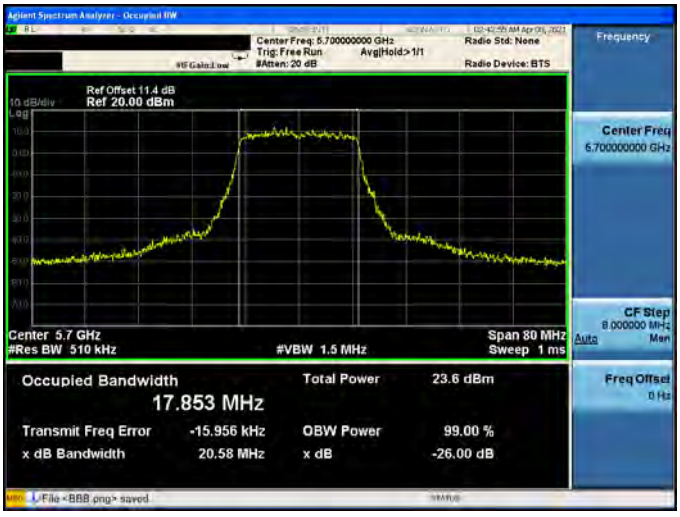
Mode 11: IEEE 802.11n 5 GHz 20 MHz Continuous TX Mode_ANT-2	
5500 MHz	
5560 MHz	
5700 MHz	

Mode 12: IEEE 802.11n 5 GHz 40 MHz Continuous TX Mode_ANT-2	
5270 MHz	
5310 MHz	

Mode 12: IEEE 802.11n 5 GHz 40 MHz Continuous TX Mode_ANT-2	
5510 MHz	
5550 MHz	
5670 MHz	


Mode 13: IEEE 802.11ac 20 MHz Continuous TX Mode_ ANT-2	
5180 MHz	
5200 MHz	
5240 MHz	

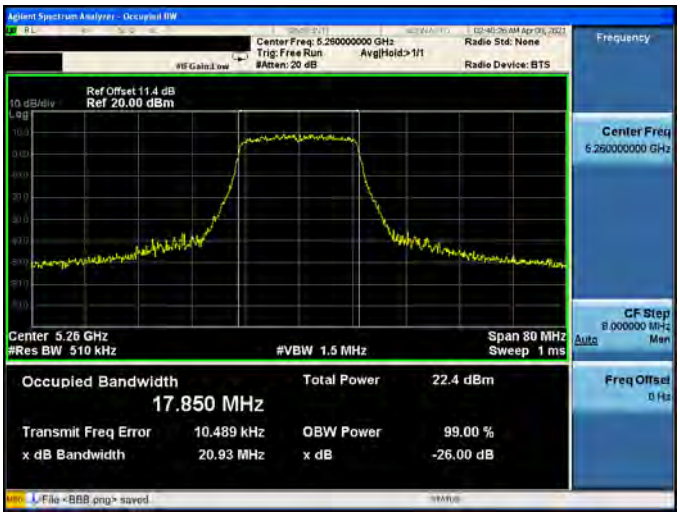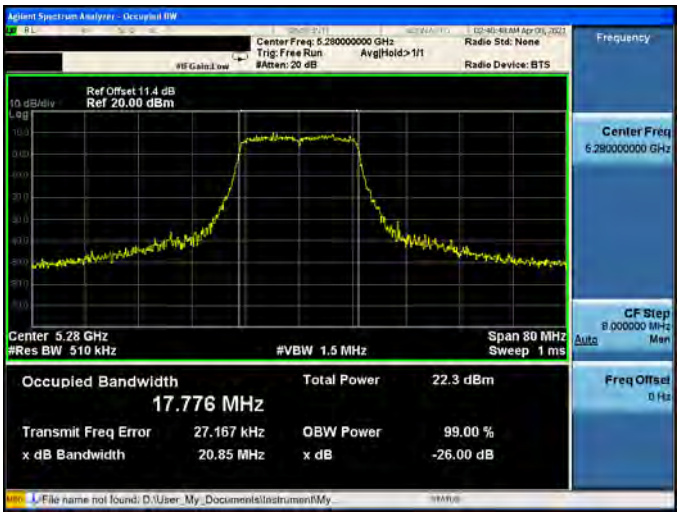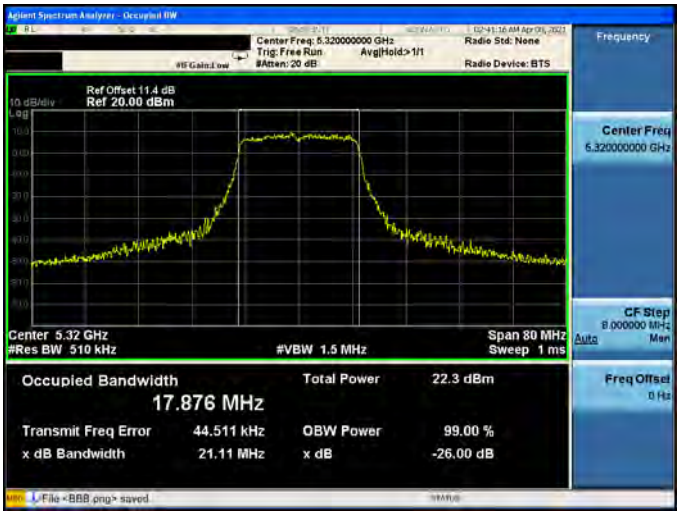
Mode 13: IEEE 802.11ac 20 MHz Continuous TX Mode_ANT-2	
5260 MHz	
5280 MHz	
5320 MHz	

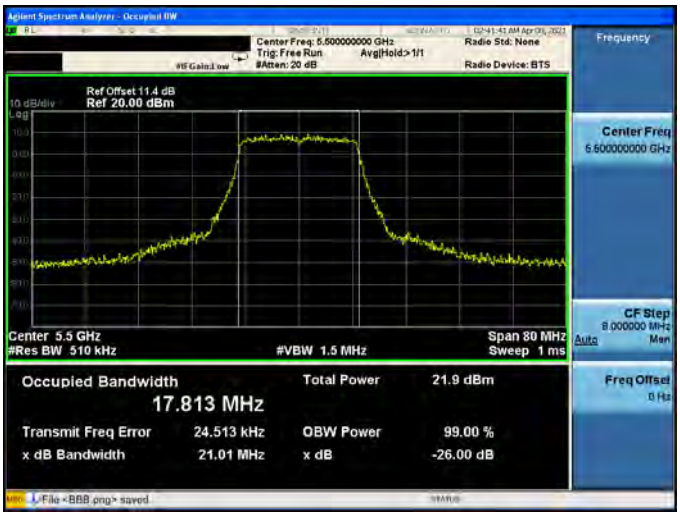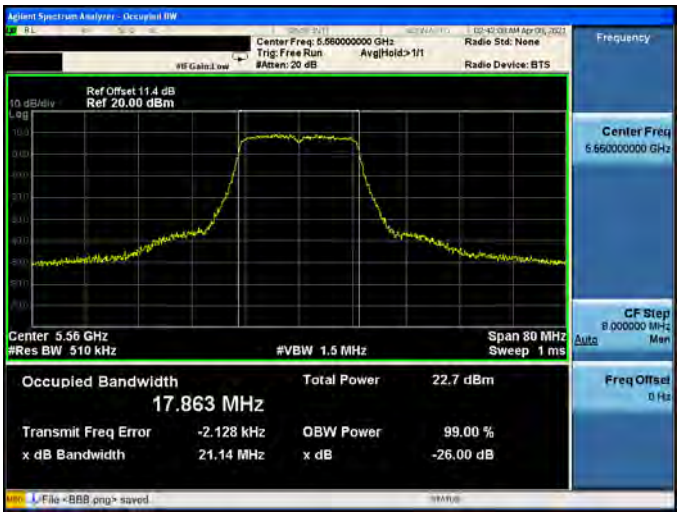Mode 13: IEEE 802.11ac 20 MHz Continuous TX Mode_ANT-2	
5500 MHz	
5560 MHz	
5700 MHz	



Mode 14: IEEE 802.11ac 40 MHz Continuous TX Mode_ ANT-2	
5190 MHz	
5230 MHz	



Mode 14: IEEE 802.11ac 40 MHz Continuous TX Mode_ANT-2	
5270 MHz	
5310 MHz	

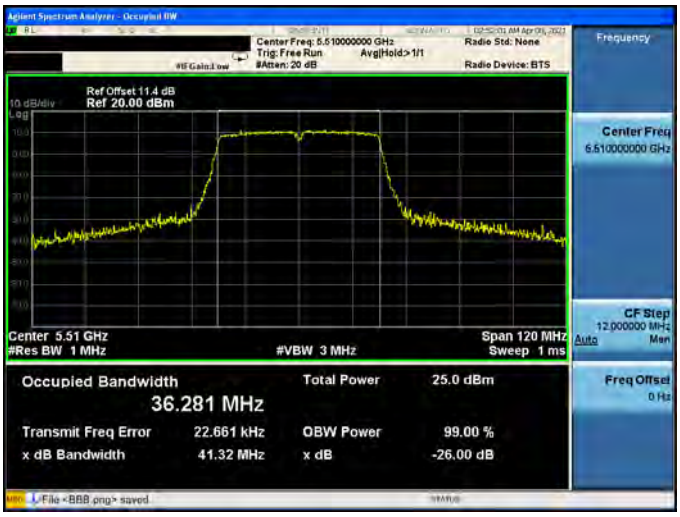Mode 14: IEEE 802.11ac 40 MHz Continuous TX Mode_ANT-2	
5510 MHz	
5550 MHz	
5670 MHz	

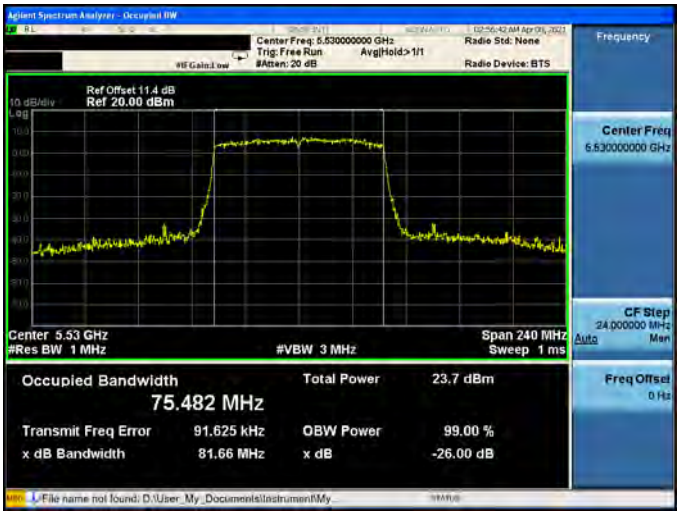Mode 15: IEEE 802.11ac 80 MHz Continuous TX Mode_ANT-2	
5210 MHz	
5290 MHz	
5530 MHz	

Mode 16: IEEE 802.11ax 20 MHz Continuous TX Mode_ANT-2	
5180 MHz	
5200 MHz	
5240 MHz	

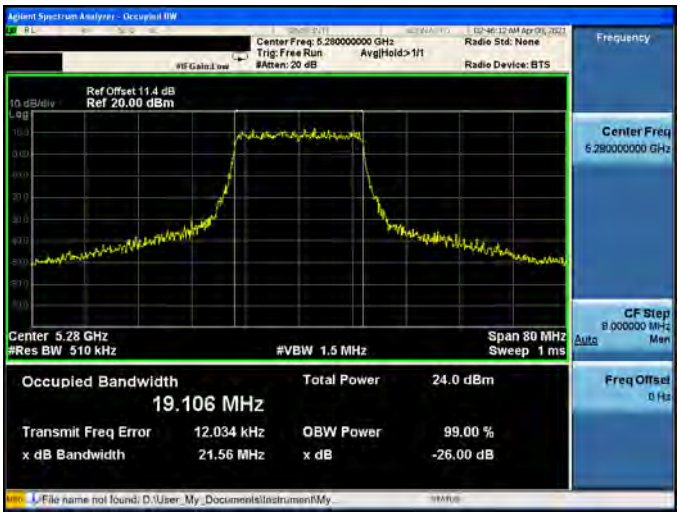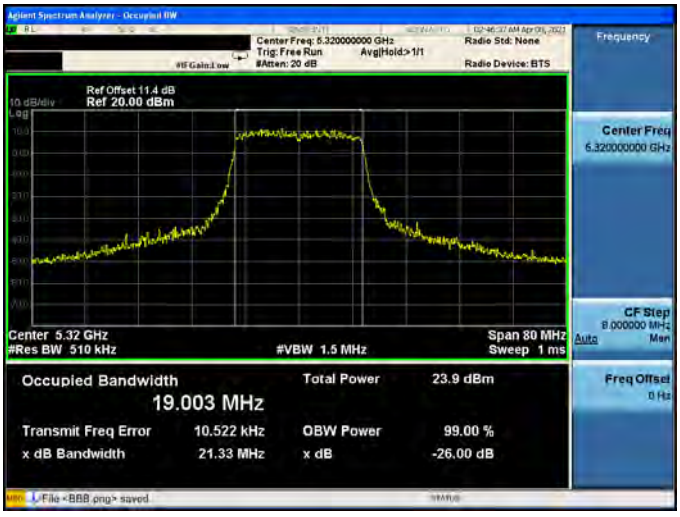
Mode 16: IEEE 802.11ax 20 MHz Continuous TX Mode_ANT-2	
5260 MHz	
5280 MHz	
5320 MHz	

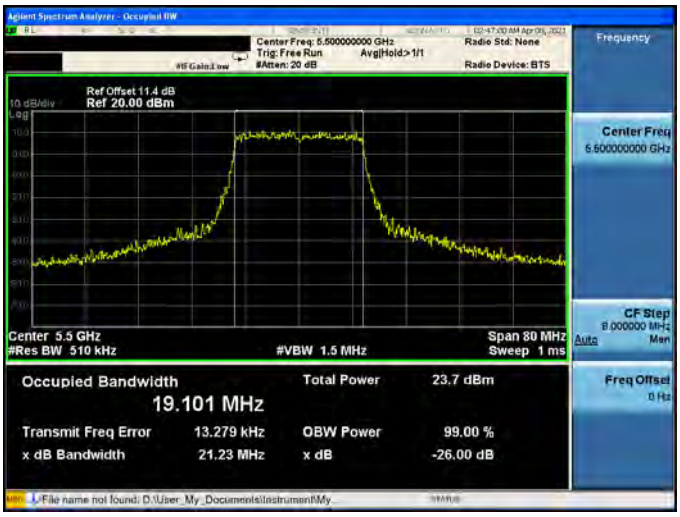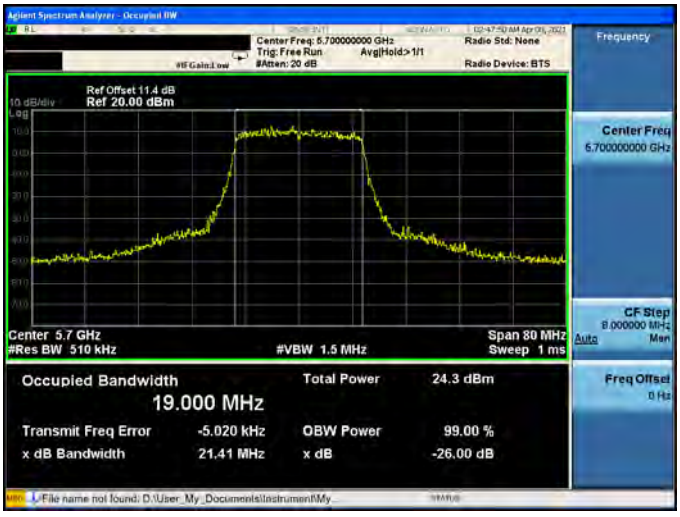Mode 16: IEEE 802.11ax 20 MHz Continuous TX Mode_ANT-2	
5500 MHz	
5560 MHz	
5700 MHz	


Mode 17: IEEE 802.11ax 40 MHz Continuous TX Mode_ANT-2	
5190 MHz	
5230 MHz	


Mode 17: IEEE 802.11ax 40 MHz Continuous TX Mode_ANT-2	
5270 MHz	
5310 MHz	




Mode 17: IEEE 802.11ax 40 MHz Continuous TX Mode_ANT-2	
5510 MHz	
5550 MHz	
5670 MHz	


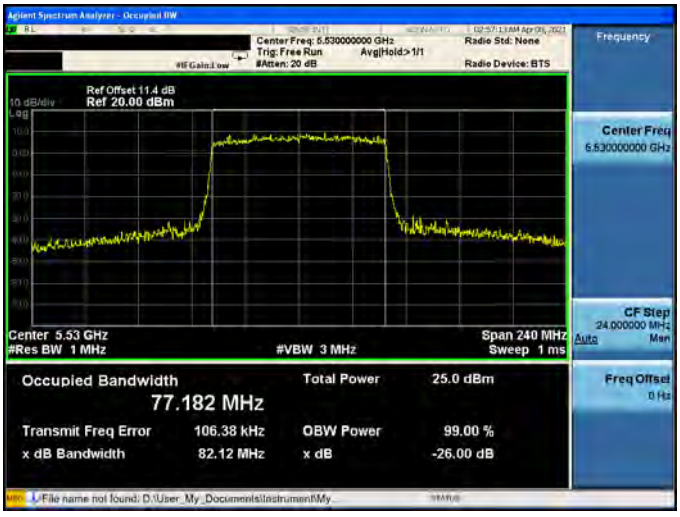
Mode 18: IEEE 802.11ax 80 MHz Continuous TX Mode_ANT-2	
5210 MHz	
5290 MHz	
5530 MHz	


Mode 10: IEEE 802.11a Continuous TX Mode_ANT-3	
5180 MHz	
5200 MHz	
5240 MHz	

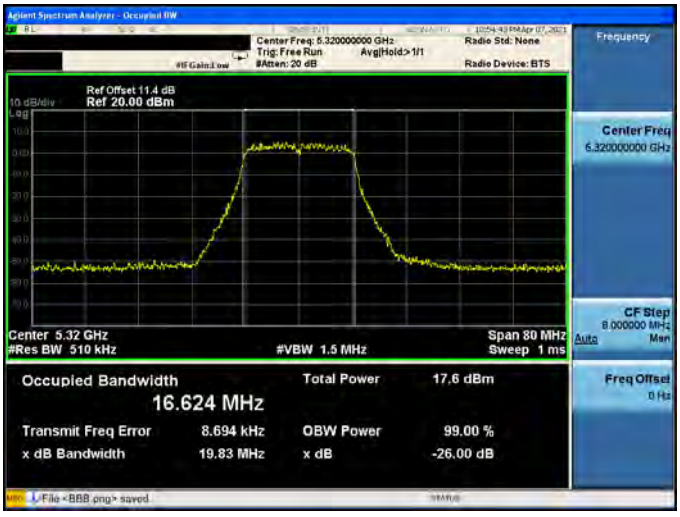Mode 10: IEEE 802.11a Continuous TX Mode_ANT-3	
5260 MHz	
5280 MHz	
5320 MHz	

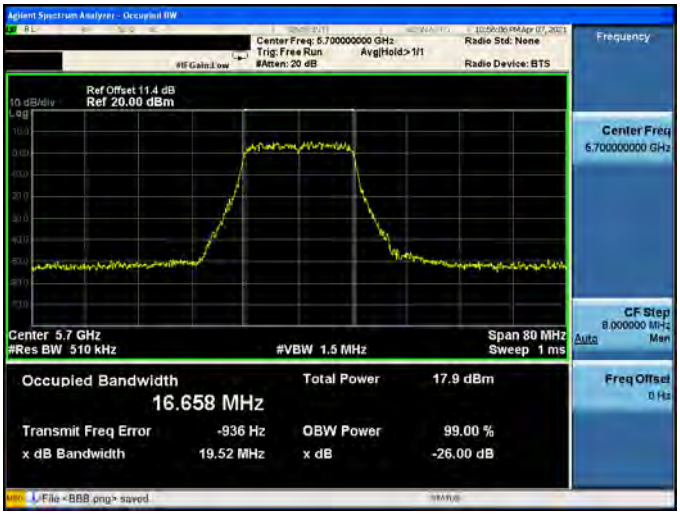Mode 10: IEEE 802.11a Continuous TX Mode_ANT-3	
5500 MHz	
5560 MHz	
5700 MHz	

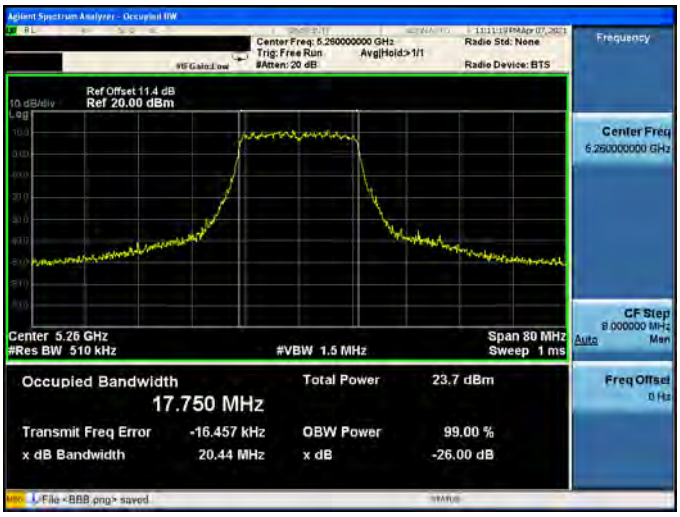
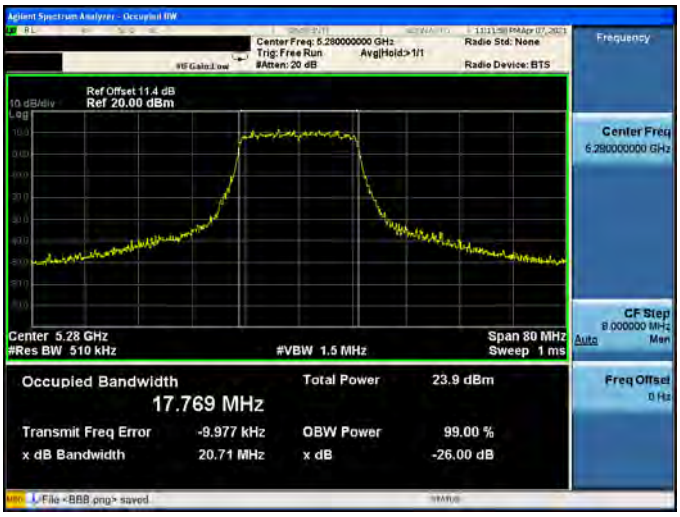
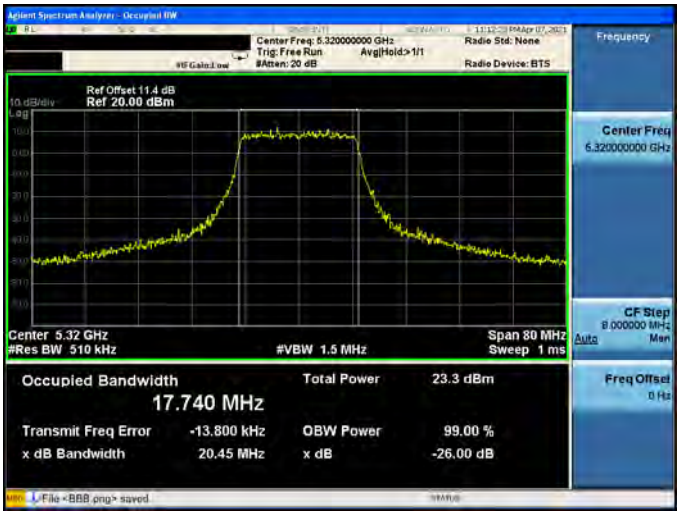
Mode 11: IEEE 802.11n 5 GHz 20 MHz Continuous TX Mode_ANT-3	
5260 MHz	
5280 MHz	
5320 MHz	

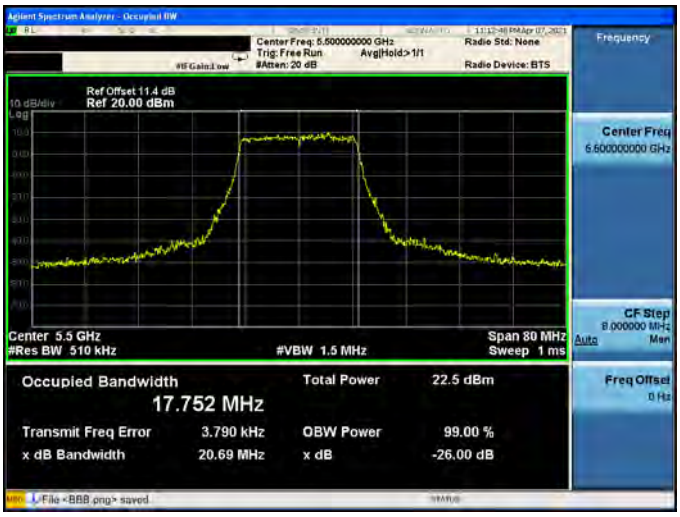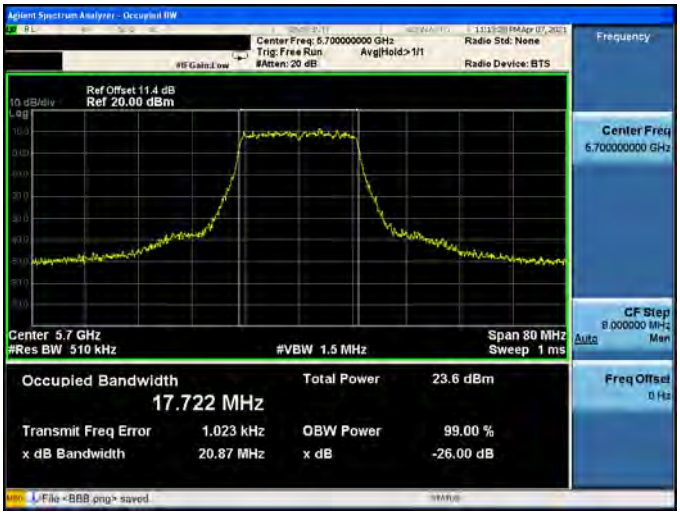
Mode 11: IEEE 802.11n 5 GHz 20 MHz Continuous TX Mode_ANT-3	
5500 MHz	
5560 MHz	
5700 MHz	

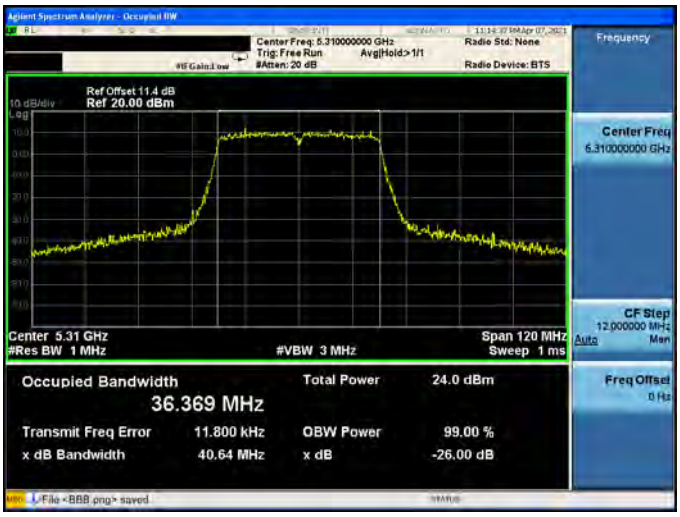Mode 12: IEEE 802.11n 5 GHz 40 MHz Continuous TX Mode_ANT-3	
5270 MHz	
5310 MHz	

Mode 12: IEEE 802.11n 5 GHz 40 MHz Continuous TX Mode_ANT-3	
5510 MHz	
5550 MHz	
5670 MHz	

Mode 13: IEEE 802.11ac 20 MHz Continuous TX Mode_ ANT-3	
5180 MHz	
5200 MHz	
5240 MHz	

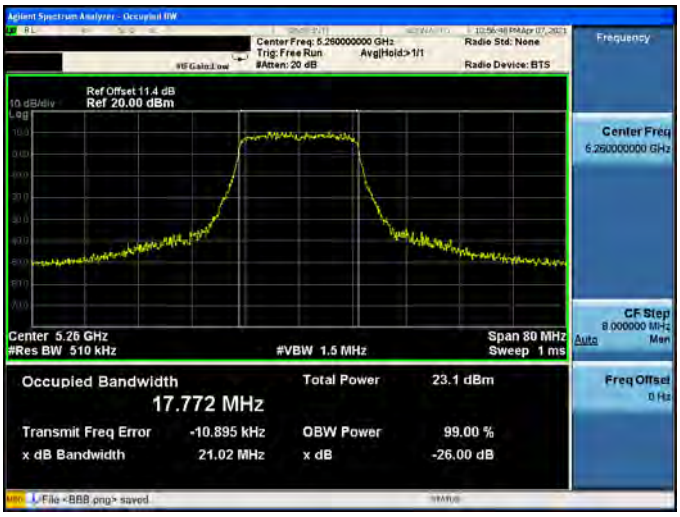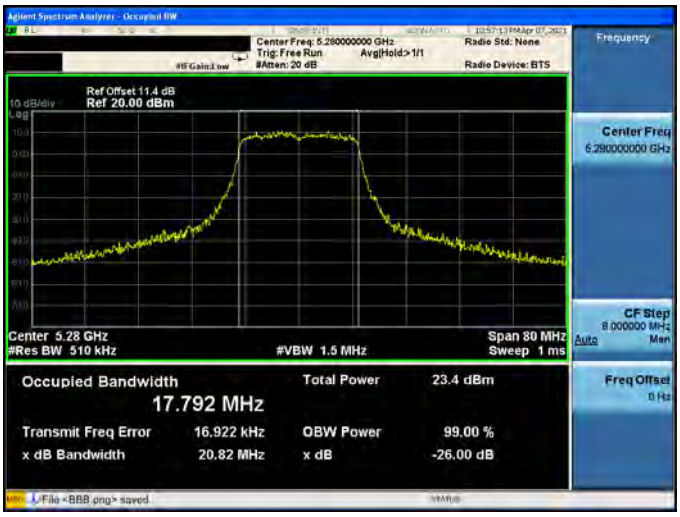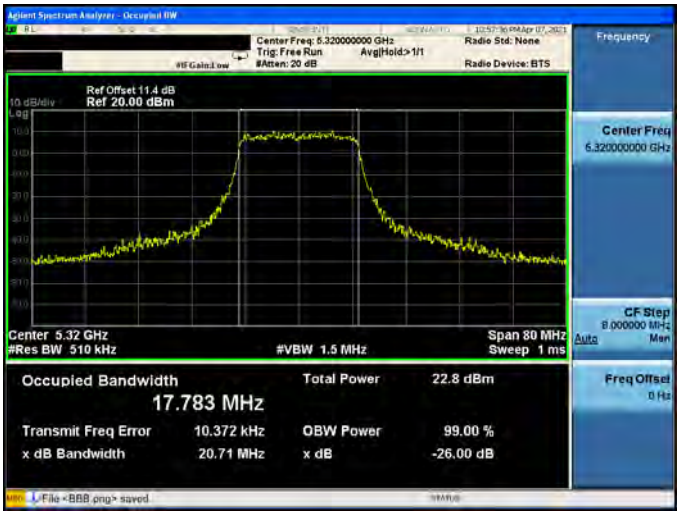Mode 13: IEEE 802.11ac 20 MHz Continuous TX Mode_ANT-3	
5260 MHz	
5280 MHz	
5320 MHz	



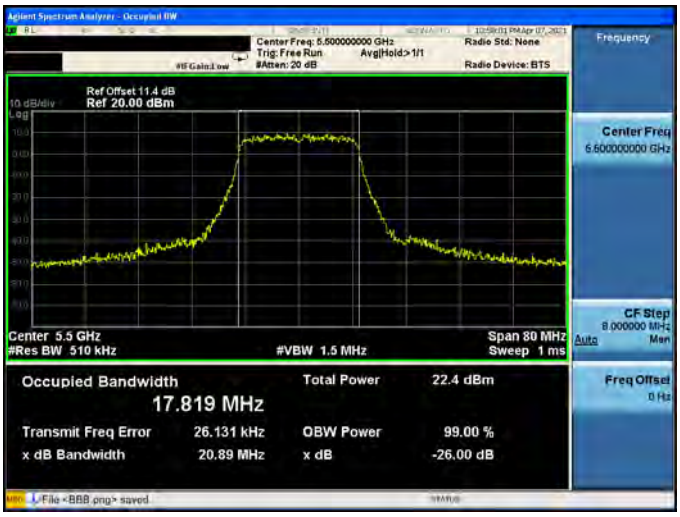
Mode 13: IEEE 802.11ac 20 MHz Continuous TX Mode_ANT-3	
5500 MHz	
5560 MHz	
5700 MHz	




Mode 14: IEEE 802.11ac 40 MHz Continuous TX Mode_ ANT-3	
5190 MHz	
5230 MHz	



Mode 14: IEEE 802.11ac 40 MHz Continuous TX Mode_ANT-3	
5270 MHz	
5310 MHz	

Mode 14: IEEE 802.11ac 40 MHz Continuous TX Mode_ANT-3	
5510 MHz	
5550 MHz	
5670 MHz	

Mode 15: IEEE 802.11ac 80 MHz Continuous TX Mode_ANT-3	
5210 MHz	
5290 MHz	
5530 MHz	

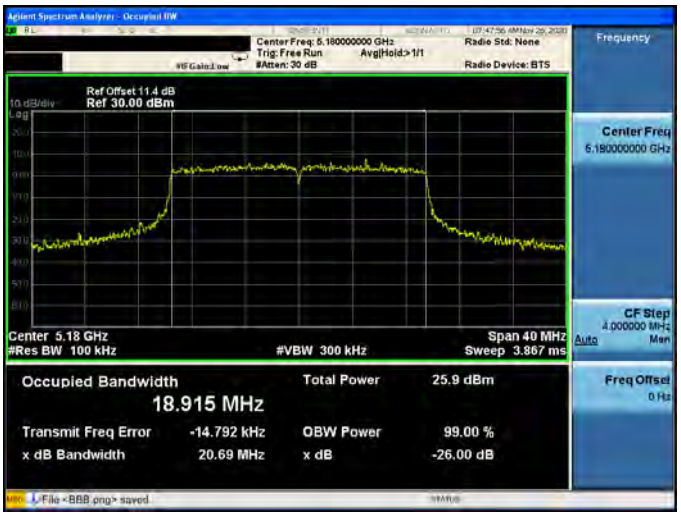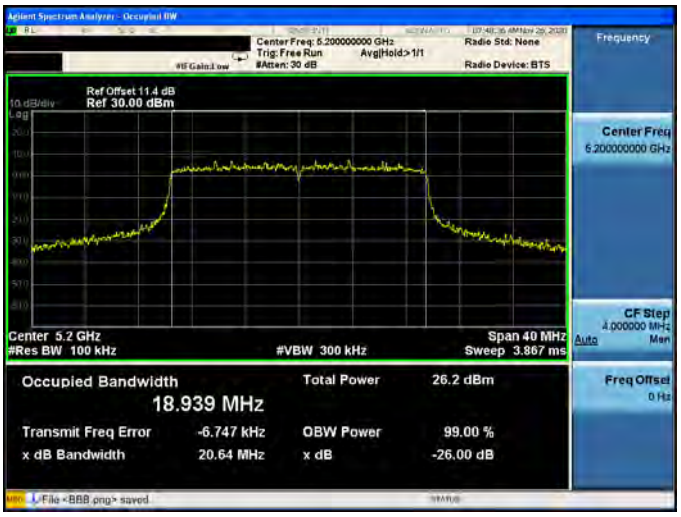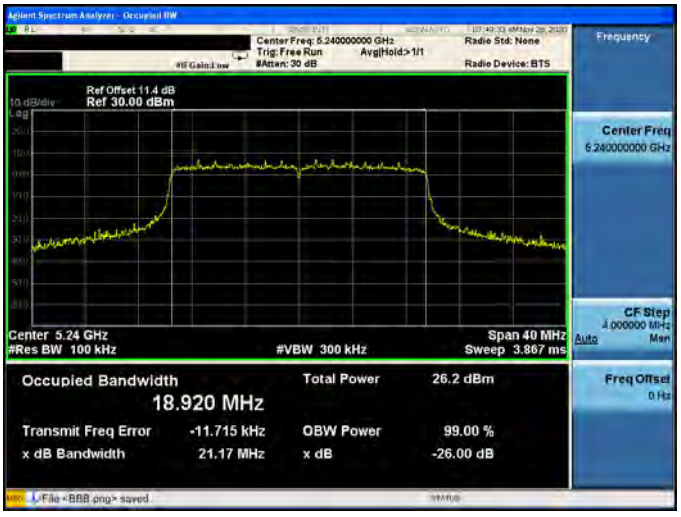Mode 16: IEEE 802.11ax 20 MHz Continuous TX Mode_ANT-3	
5180 MHz	
5200 MHz	
5240 MHz	

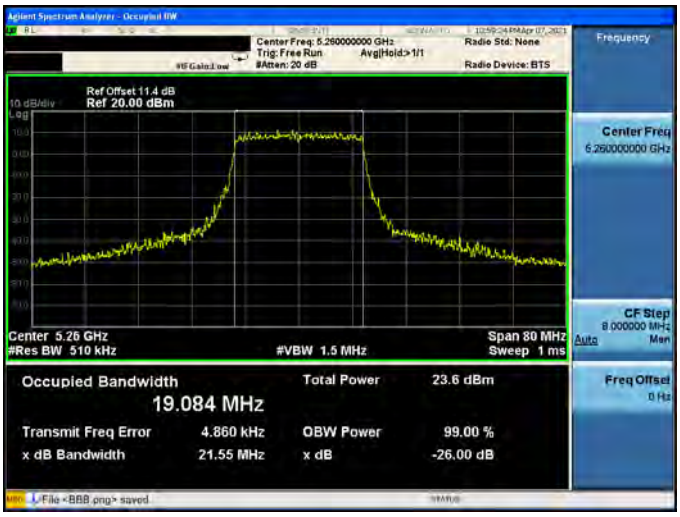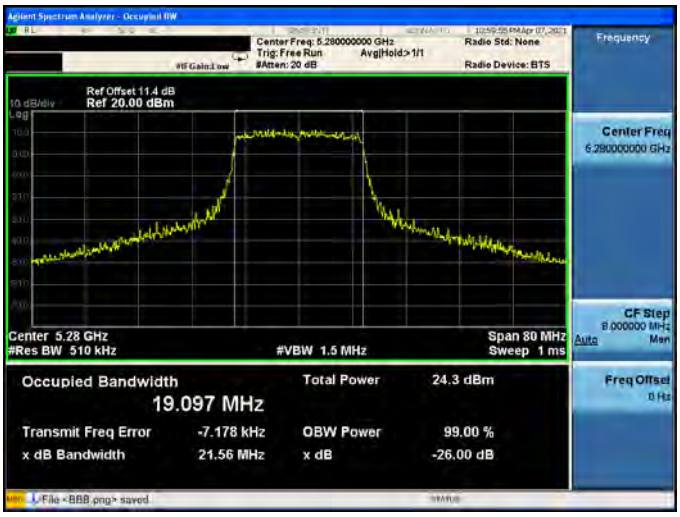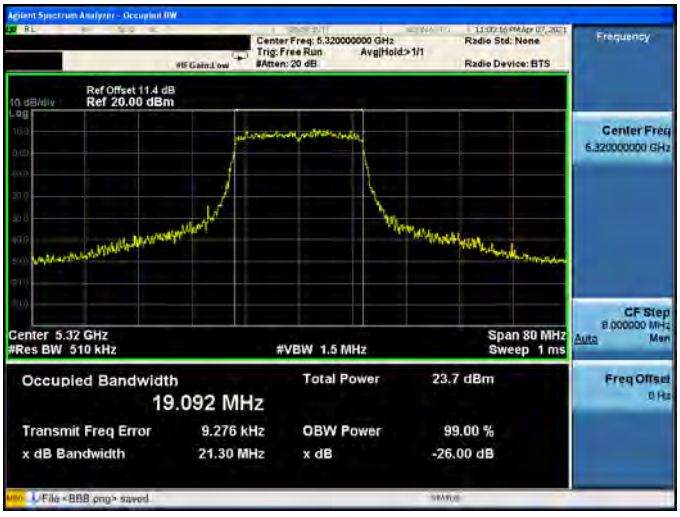
Mode 16: IEEE 802.11ax 20 MHz Continuous TX Mode_ANT-3	
5260 MHz	
5280 MHz	
5320 MHz	

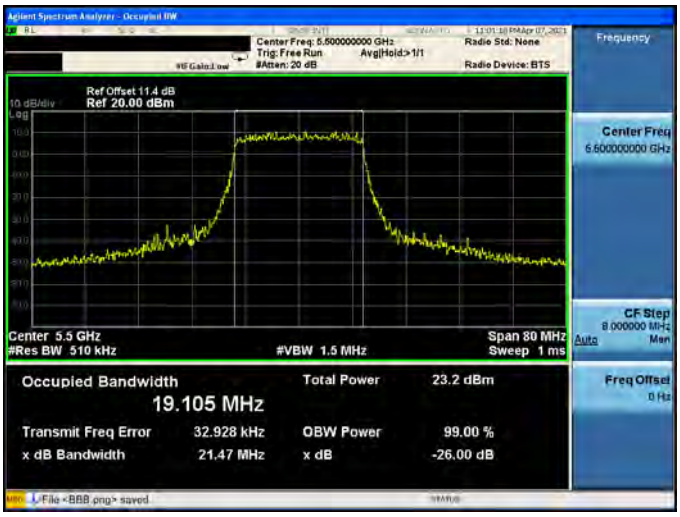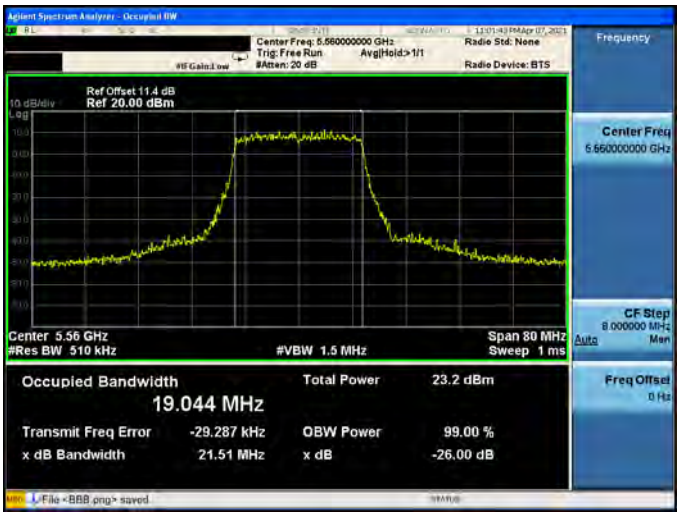Mode 16: IEEE 802.11ax 20 MHz Continuous TX Mode_ANT-3	
5500 MHz	
5560 MHz	
5700 MHz	




Mode 17: IEEE 802.11ax 40 MHz Continuous TX Mode_ANT-3	
5190 MHz	
5230 MHz	




Mode 17: IEEE 802.11ax 40 MHz Continuous TX Mode_ANT-3	
5270 MHz	
5310 MHz	


Mode 17: IEEE 802.11ax 40 MHz Continuous TX Mode_ANT-3	
5510 MHz	
5550 MHz	
5670 MHz	

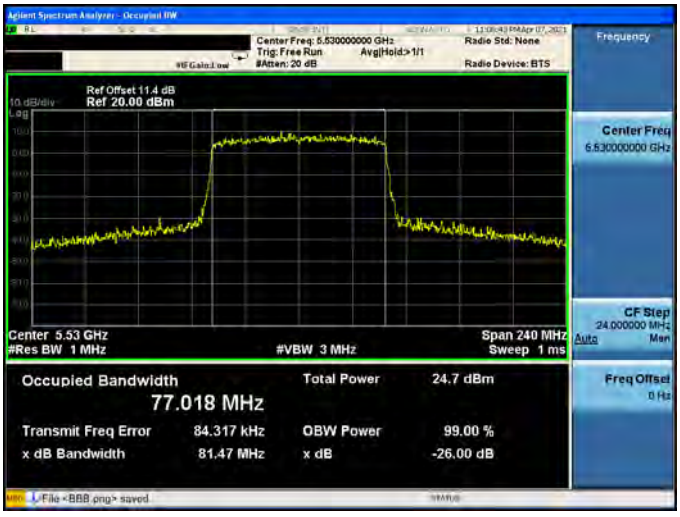Mode 18: IEEE 802.11ax 80 MHz Continuous TX Mode_ANT-3	
5210 MHz	
5290 MHz	
5530 MHz	

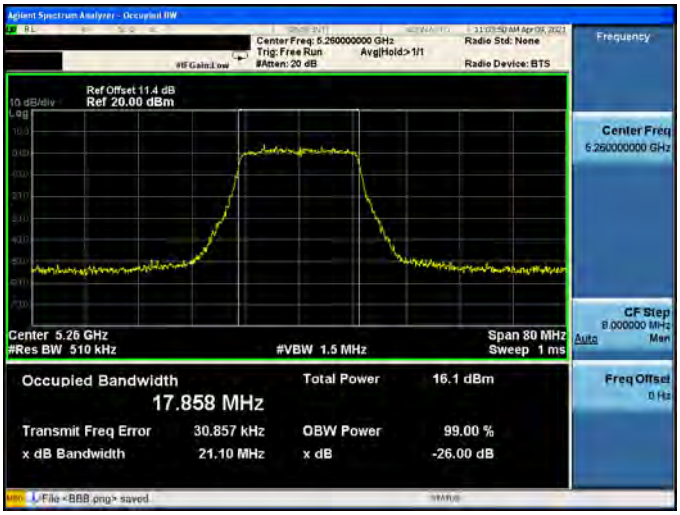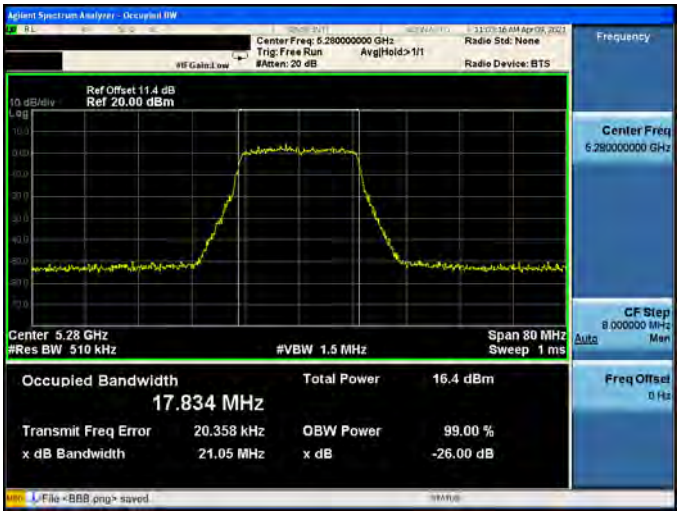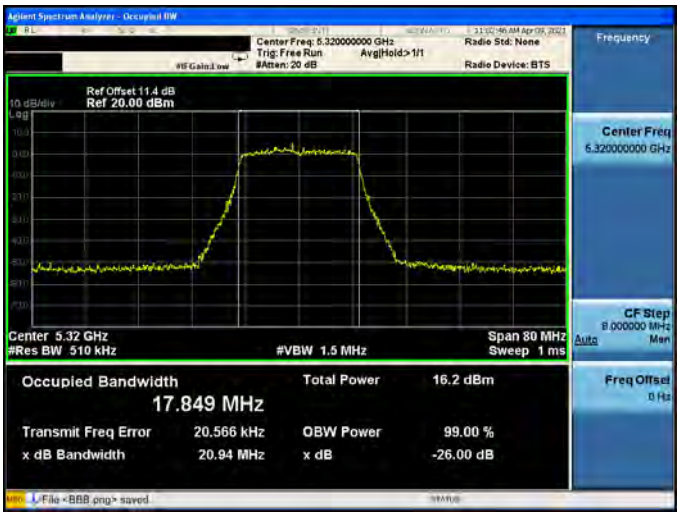Beamforming on



Mode 11: IEEE 802.11n 5 GHz 20 MHz Continuous TX Mode_ANT-0	
5260 MHz	
5280 MHz	
5320 MHz	

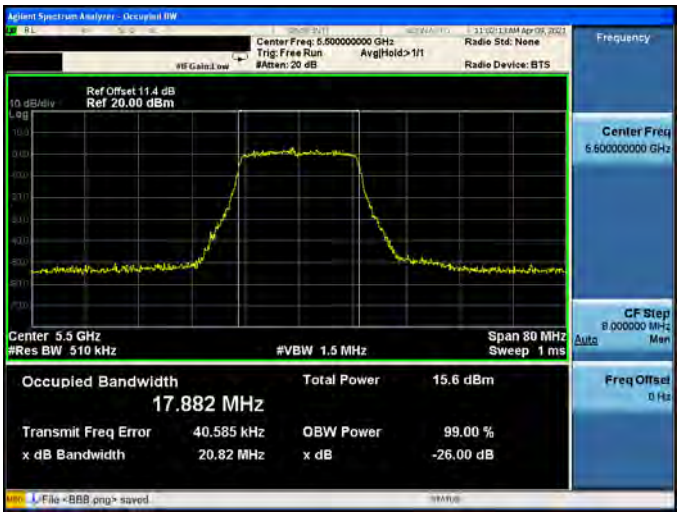
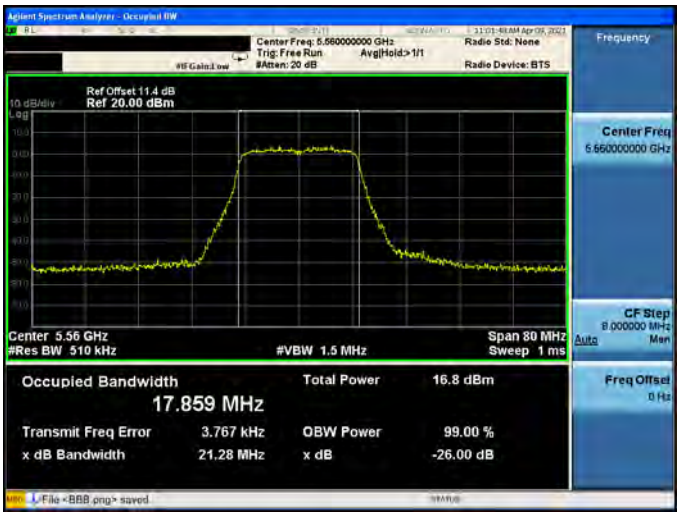
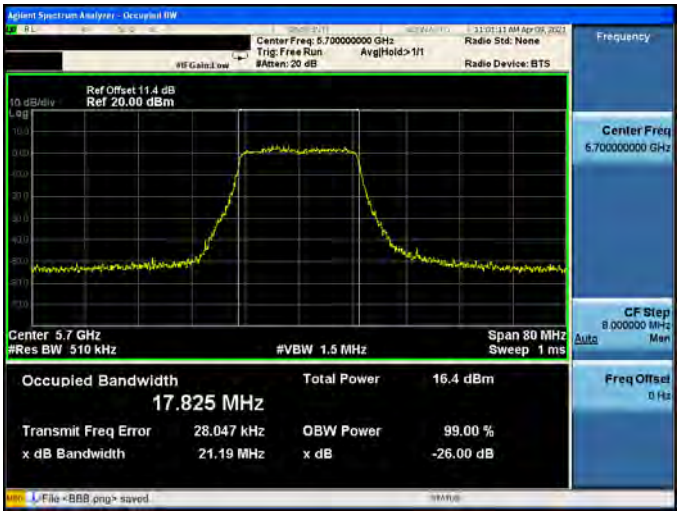
Mode 11: IEEE 802.11n 5 GHz 20 MHz Continuous TX Mode_ANT-0	
5500 MHz	
5560 MHz	
5700 MHz	

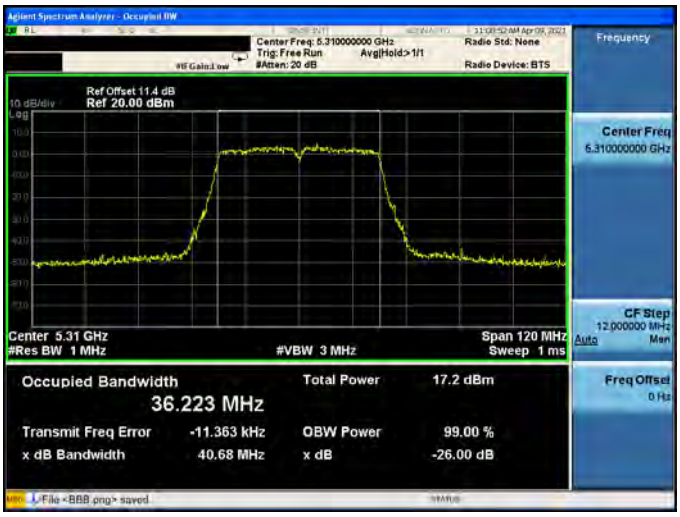Mode 12: IEEE 802.11n 5 GHz 40 MHz Continuous TX Mode_ANT-0	
5270 MHz	
5310 MHz	

Mode 12: IEEE 802.11n 5 GHz 40 MHz Continuous TX Mode_ANT-0	
5510 MHz	
5550 MHz	
5670 MHz	

Mode 13: IEEE 802.11ac 20 MHz Continuous TX Mode_ ANT-0	
5180 MHz	
5200 MHz	
5240 MHz	

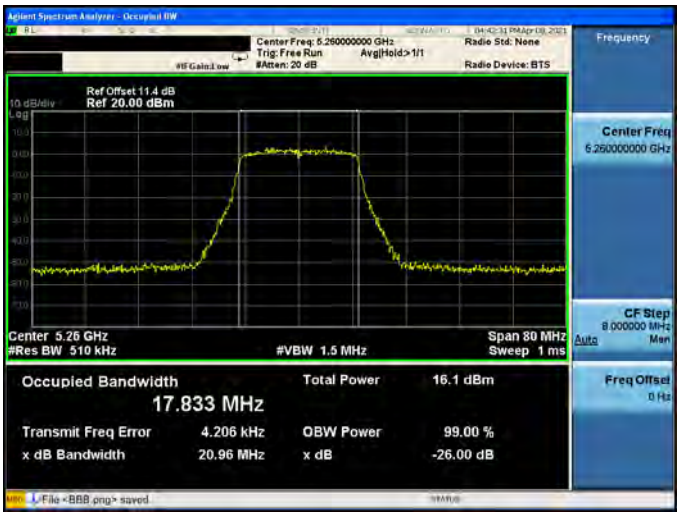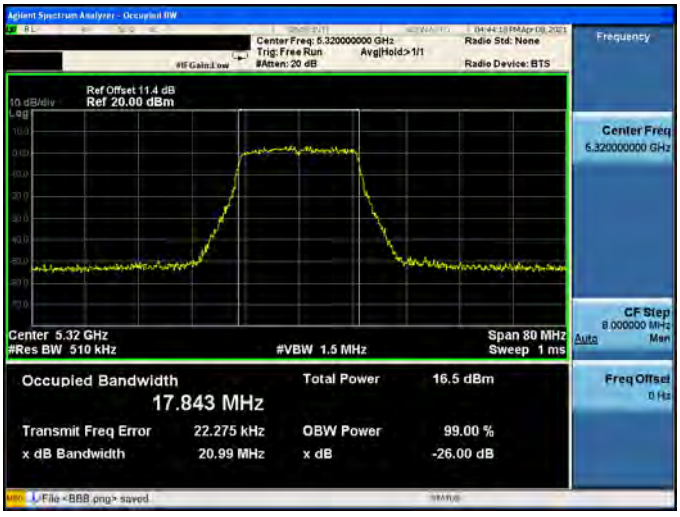Mode 13: IEEE 802.11ac 20 MHz Continuous TX Mode_ANT-0	
5260 MHz	
5280 MHz	
5320 MHz	

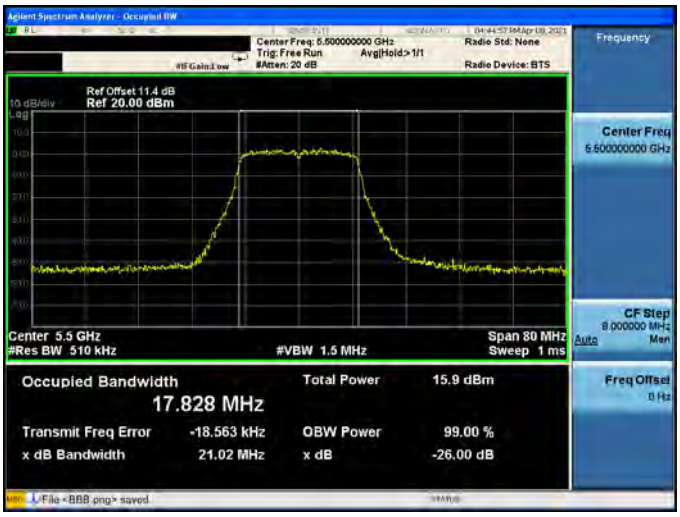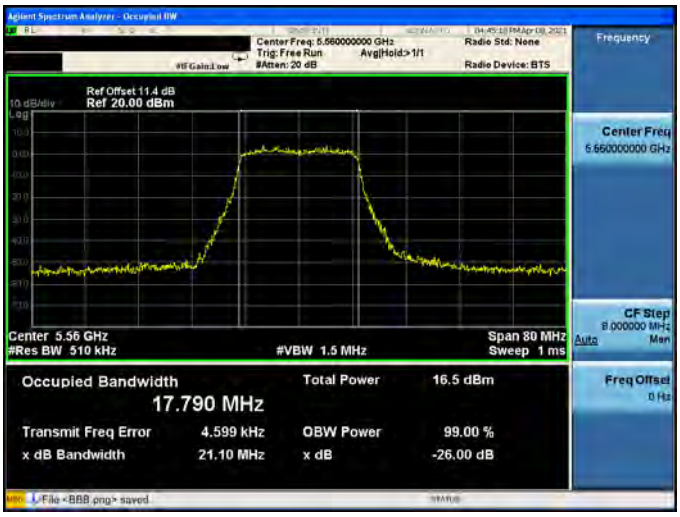
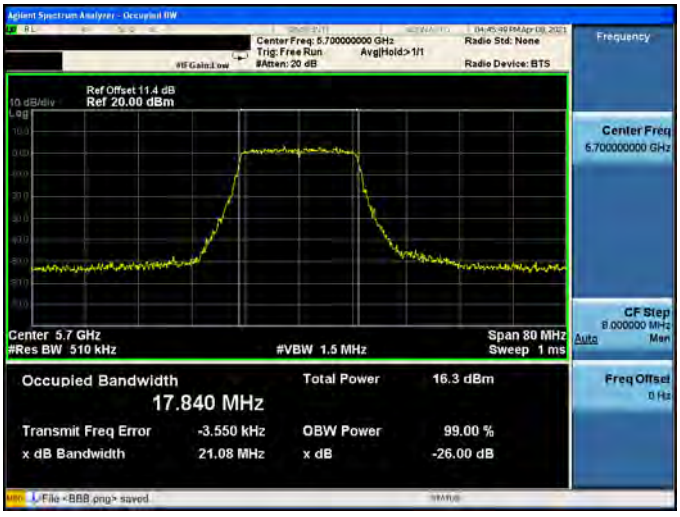
Mode 13: IEEE 802.11ac 20 MHz Continuous TX Mode_ANT-0	
5500 MHz	
5560 MHz	
5700 MHz	



Mode 14: IEEE 802.11ac 40 MHz Continuous TX Mode_ ANT-0	
5190 MHz	
5230 MHz	



Mode 14: IEEE 802.11ac 40 MHz Continuous TX Mode_ANT-0	
5270 MHz	
5310 MHz	

Mode 14: IEEE 802.11ac 40 MHz Continuous TX Mode_ANT-0	
5510 MHz	
5550 MHz	
5670 MHz	

Mode 15: IEEE 802.11ac 80 MHz Continuous TX Mode_ANT-0	
5210 MHz	
5290 MHz	
5530 MHz	

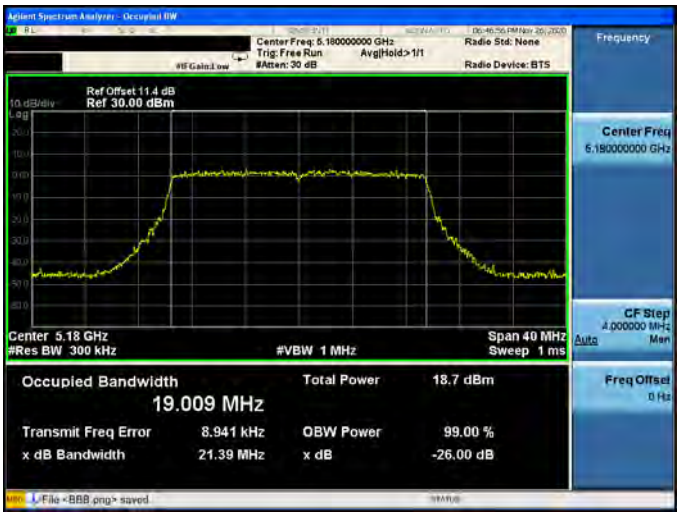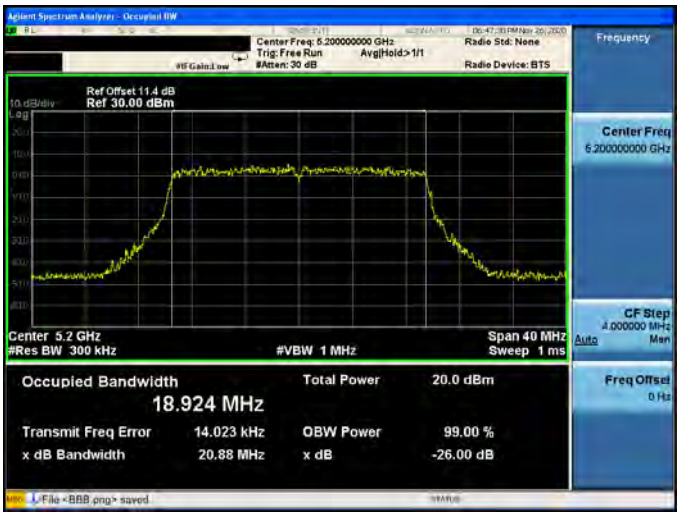Mode 16: IEEE 802.11ax 20 MHz Continuous TX Mode_ANT-0	
5180 MHz	
5200 MHz	
5240 MHz	

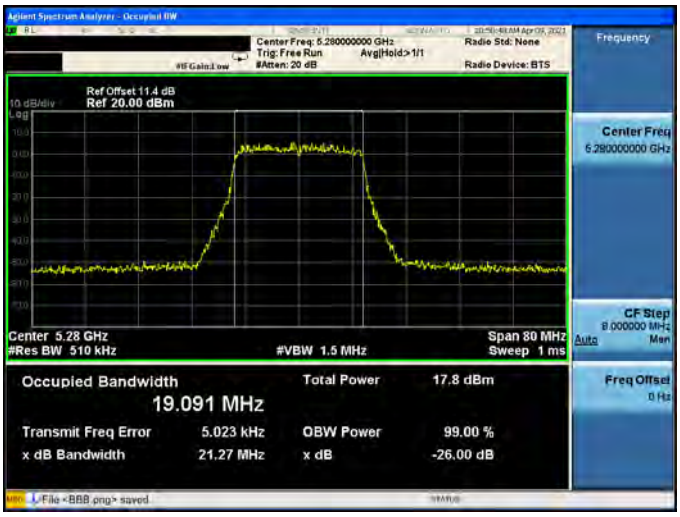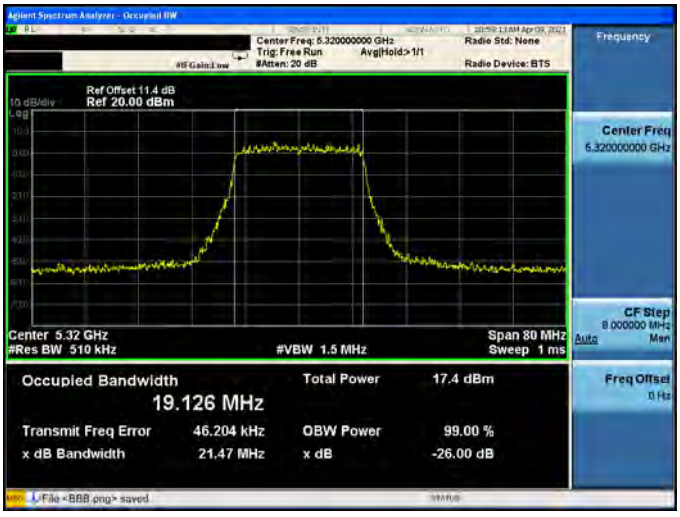
Mode 16: IEEE 802.11ax 20 MHz Continuous TX Mode_ANT-0	
5260 MHz	
5280 MHz	
5320 MHz	


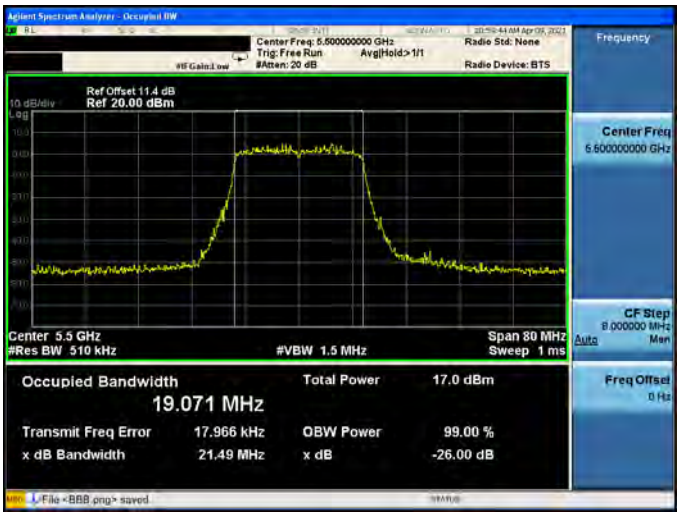
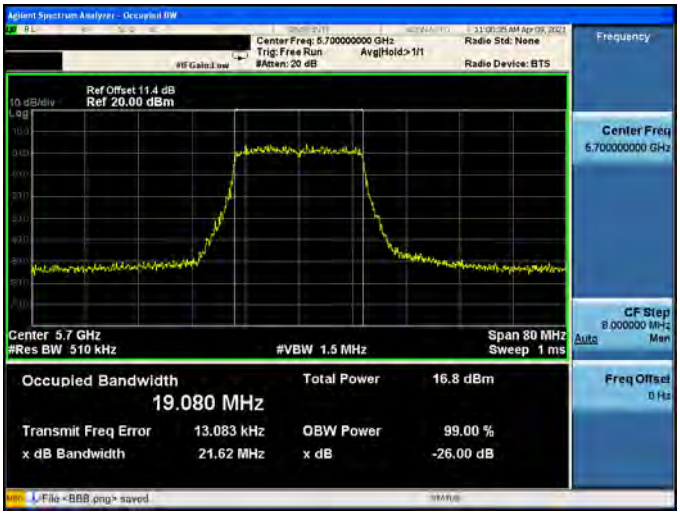
Mode 16: IEEE 802.11ax 20 MHz Continuous TX Mode_ANT-0	
5500 MHz	
5560 MHz	
5700 MHz	




Mode 17: IEEE 802.11ax 40 MHz Continuous TX Mode_ANT-0	
5190 MHz	
5230 MHz	

Mode 17: IEEE 802.11ax 40 MHz Continuous TX Mode_ANT-0	
5270 MHz	
5310 MHz	

Mode 17: IEEE 802.11ax 40 MHz Continuous TX Mode_ANT-0	
5510 MHz	
5550 MHz	
5670 MHz	

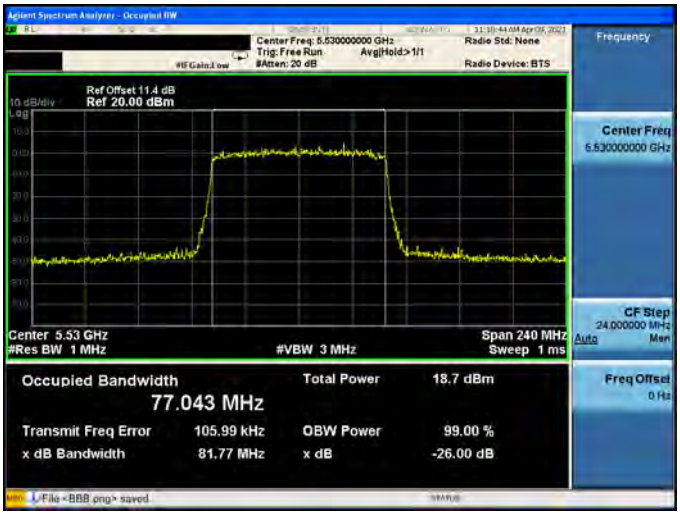Mode 18: IEEE 802.11ax 80 MHz Continuous TX Mode_ANT-0	
5210 MHz	
5290 MHz	
5530 MHz	

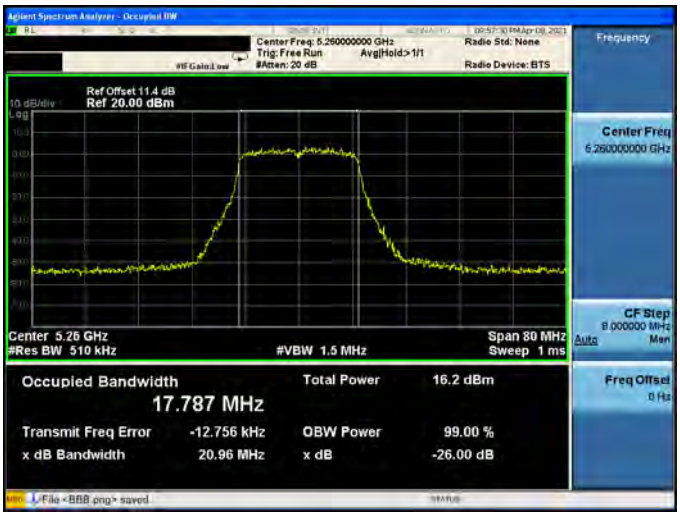
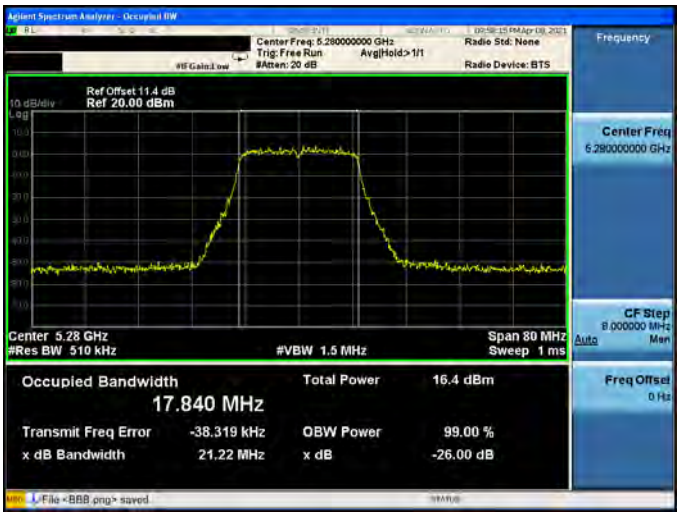
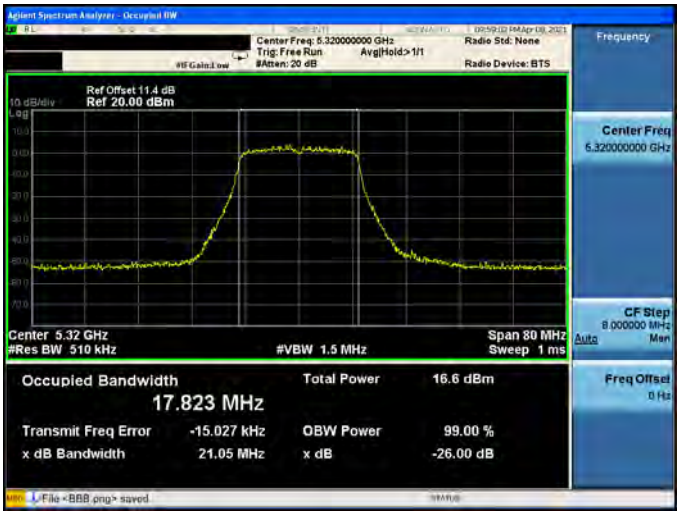
Mode 11: IEEE 802.11n 5 GHz 20 MHz Continuous TX Mode_ANT-1	
5260 MHz	
5280 MHz	
5320 MHz	

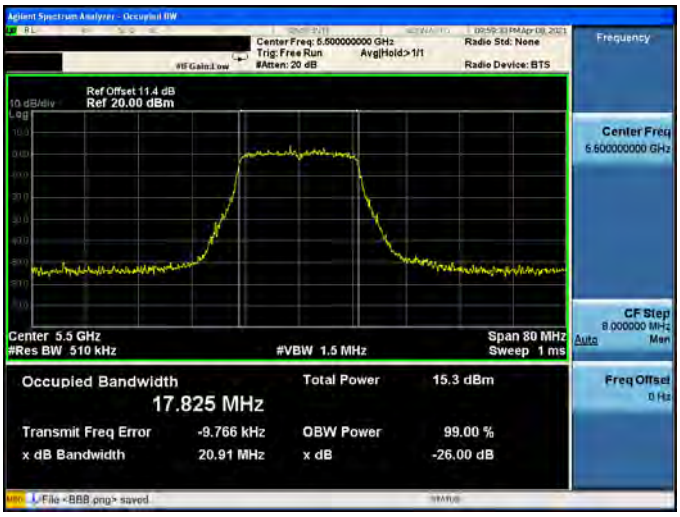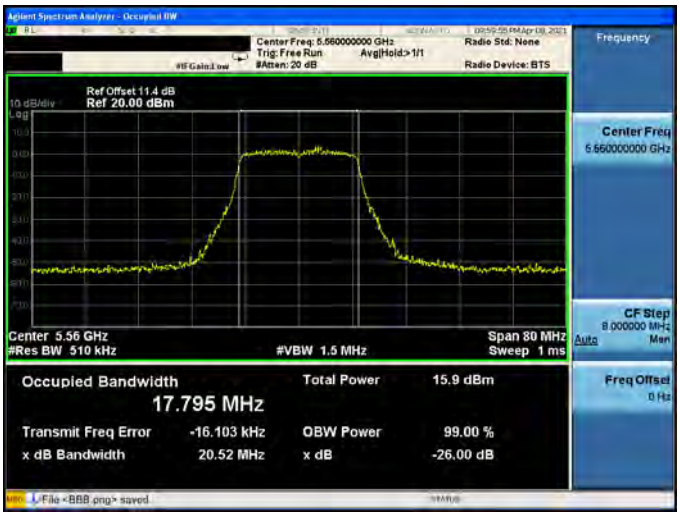
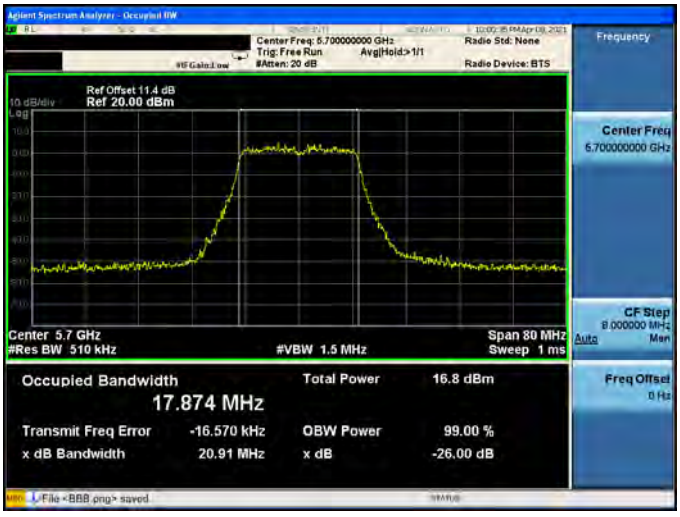
Mode 11: IEEE 802.11n 5 GHz 20 MHz Continuous TX Mode_ANT-1	
5500 MHz	
5560 MHz	
5700 MHz	

Mode 12: IEEE 802.11n 5 GHz 40 MHz Continuous TX Mode_ANT-1	
5270 MHz	
5310 MHz	

Mode 12: IEEE 802.11n 5 GHz 40 MHz Continuous TX Mode_ANT-1	
5510 MHz	
5550 MHz	
5670 MHz	

Mode 13: IEEE 802.11ac 20 MHz Continuous TX Mode_ ANT-1	
5180 MHz	
5200 MHz	
5240 MHz	

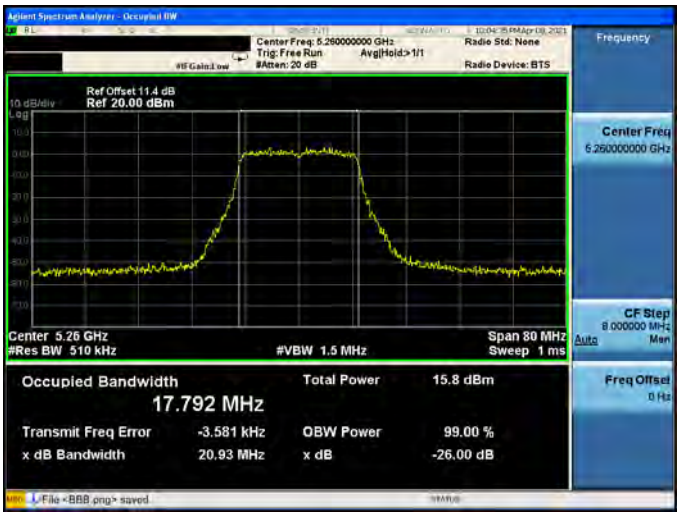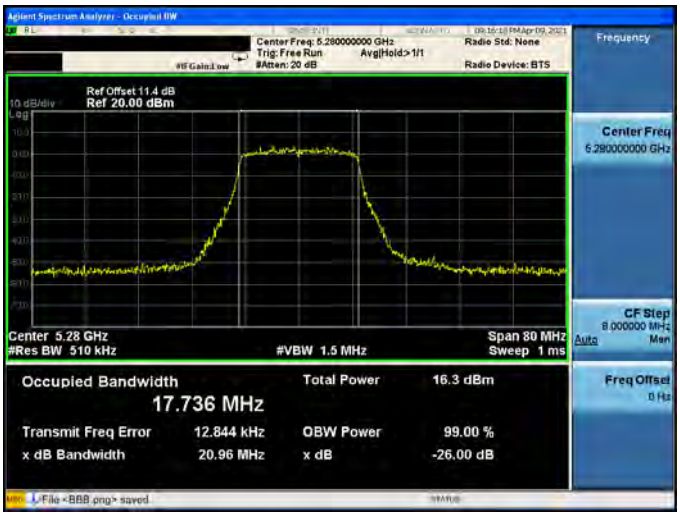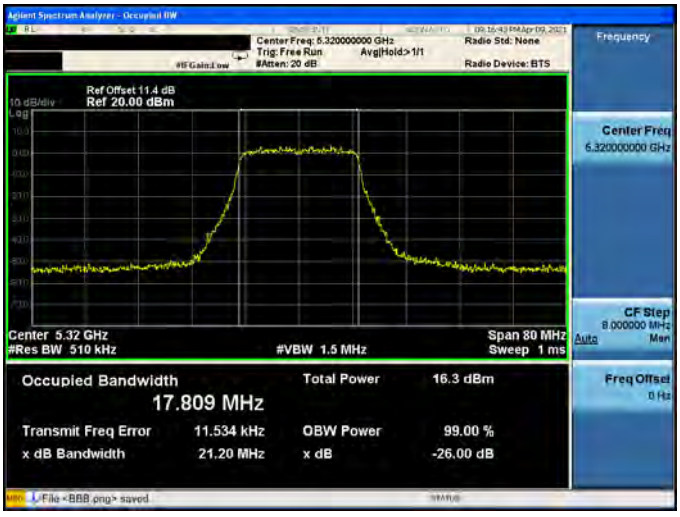Mode 13: IEEE 802.11ac 20 MHz Continuous TX Mode_ANT-1	
5260 MHz	
5280 MHz	
5320 MHz	

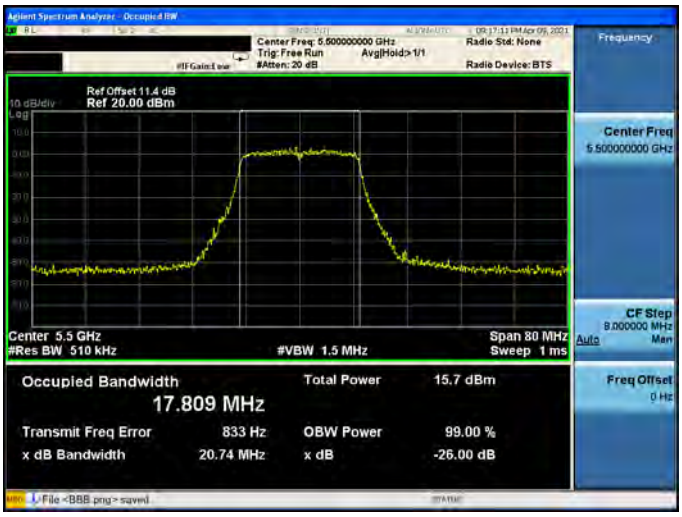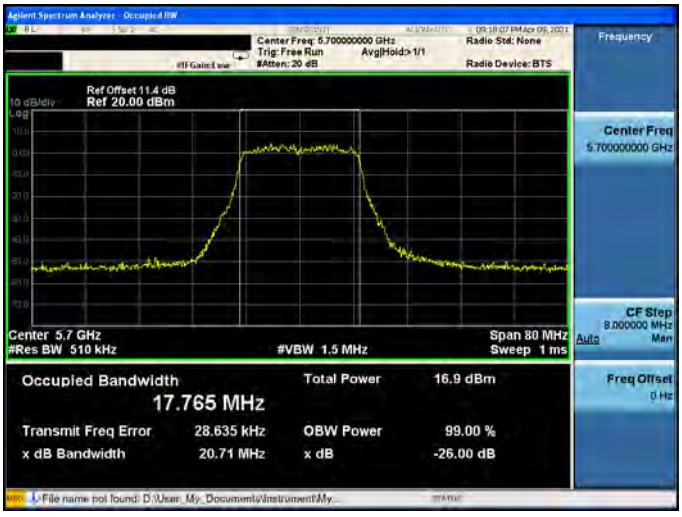
Mode 13: IEEE 802.11ac 20 MHz Continuous TX Mode_ANT-1	
5500 MHz	
5560 MHz	
5700 MHz	




Mode 14: IEEE 802.11ac 40 MHz Continuous TX Mode_ ANT-1	
5190 MHz	
5230 MHz	




Mode 14: IEEE 802.11ac 40 MHz Continuous TX Mode_ANT-1	
5270 MHz	
5310 MHz	

Mode 14: IEEE 802.11ac 40 MHz Continuous TX Mode_ANT-1	
5510 MHz	
5550 MHz	
5670 MHz	


Mode 15: IEEE 802.11ac 80 MHz Continuous TX Mode_ANT-1	
5210 MHz	
5290 MHz	
5530 MHz	

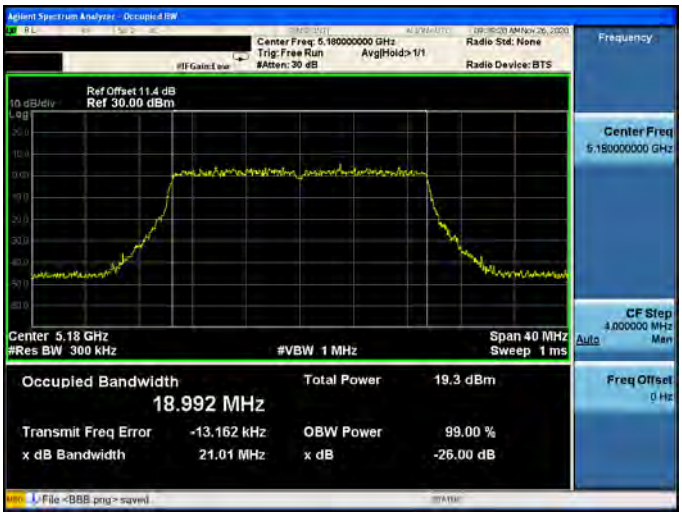Mode 16: IEEE 802.11ax 20 MHz Continuous TX Mode_ANT-1	
5180 MHz	
5200 MHz	
5240 MHz	

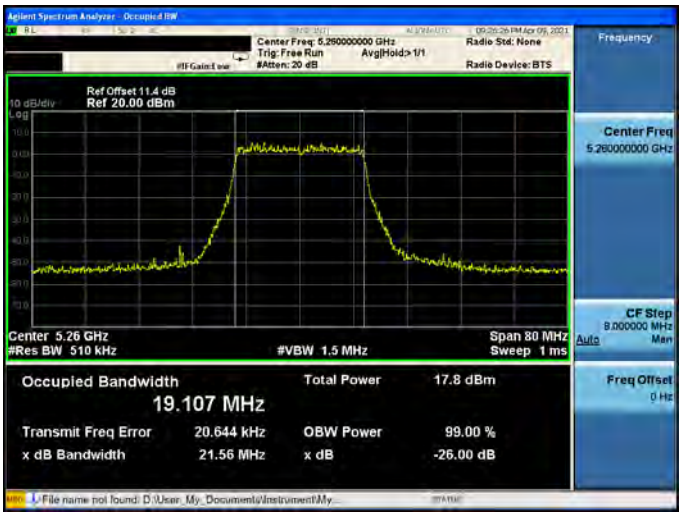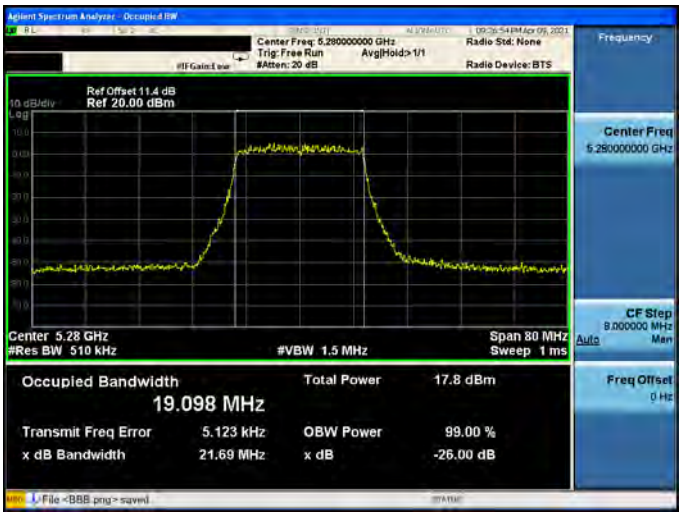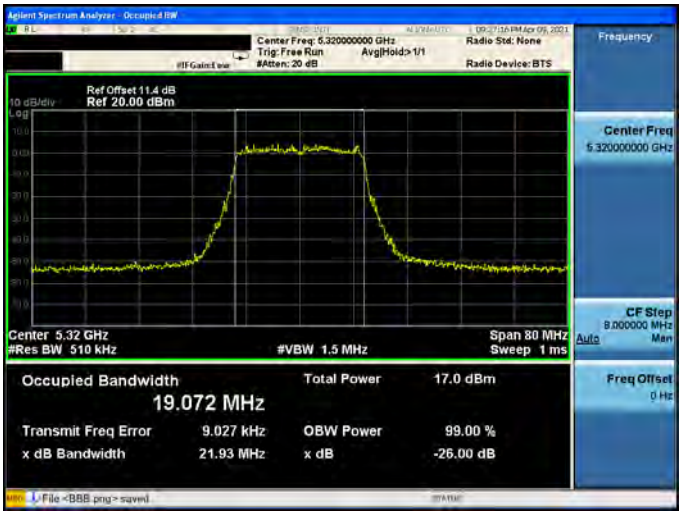Mode 16: IEEE 802.11ax 20 MHz Continuous TX Mode_ANT-1	
5260 MHz	
5280 MHz	
5320 MHz	

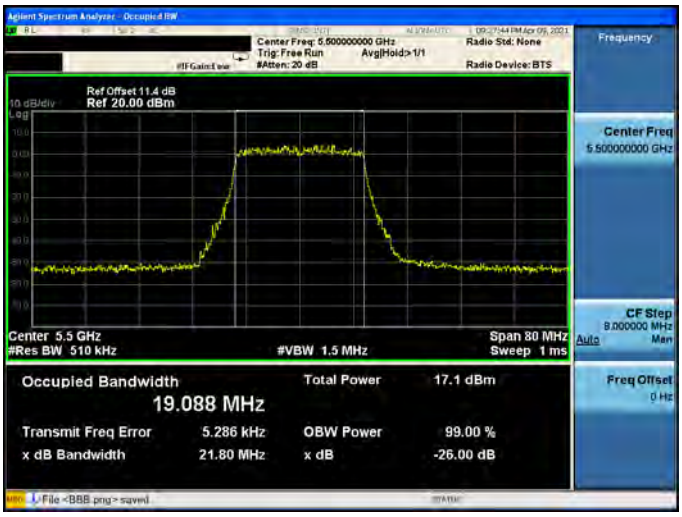
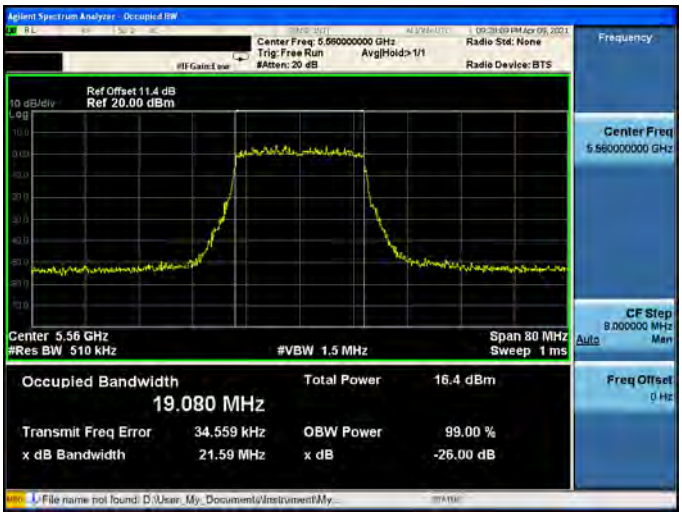
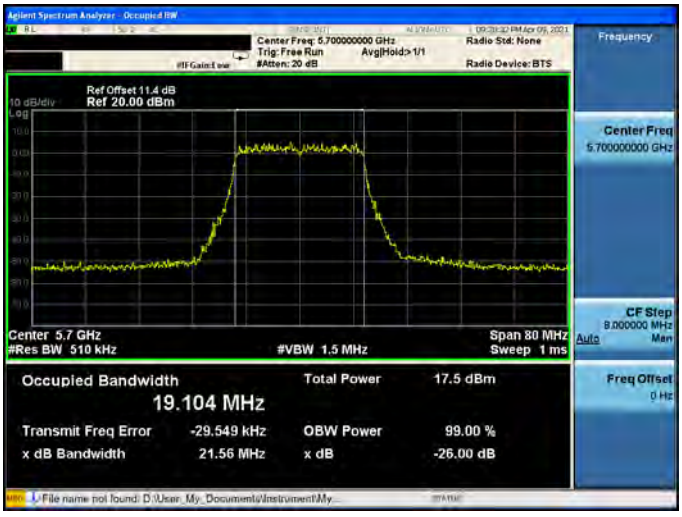
Mode 16: IEEE 802.11ax 20 MHz Continuous TX Mode_ANT-1	
5500 MHz	
5560 MHz	
5700 MHz	




Mode 17: IEEE 802.11ax 40 MHz Continuous TX Mode_ANT-1	
5190 MHz	
5230 MHz	

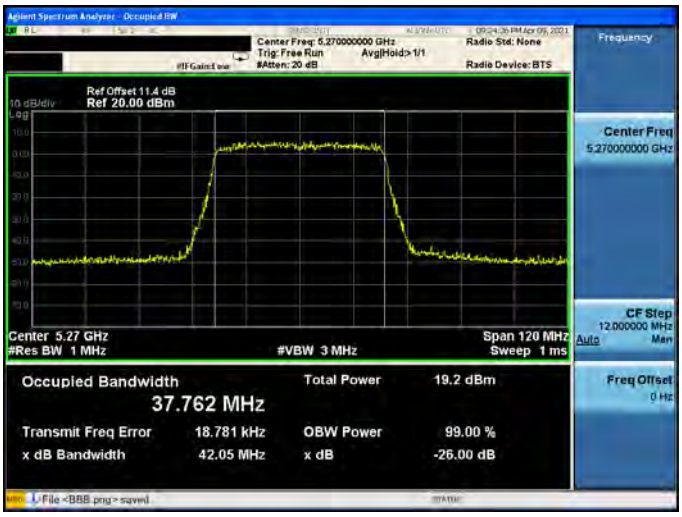Mode 17: IEEE 802.11ax 40 MHz Continuous TX Mode_ANT-1	
5270 MHz	
5310 MHz	

Mode 17: IEEE 802.11ax 40 MHz Continuous TX Mode_ANT-1	
5510 MHz	
5550 MHz	
5670 MHz	


Mode 18: IEEE 802.11ax 80 MHz Continuous TX Mode_ANT-1	
5210 MHz	
5290 MHz	
5530 MHz	

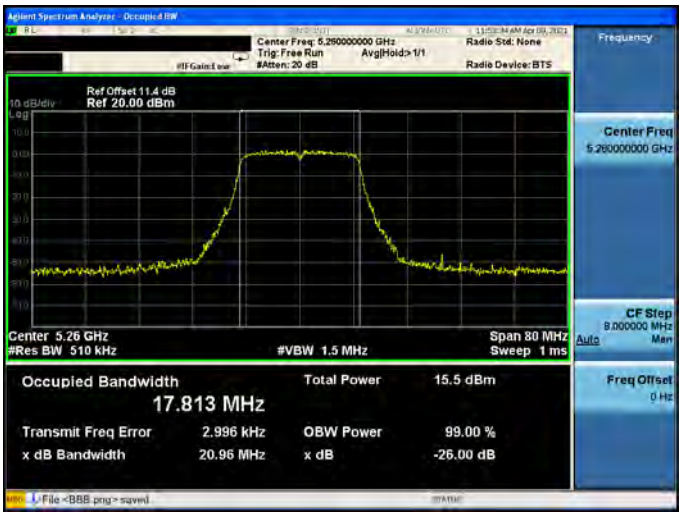
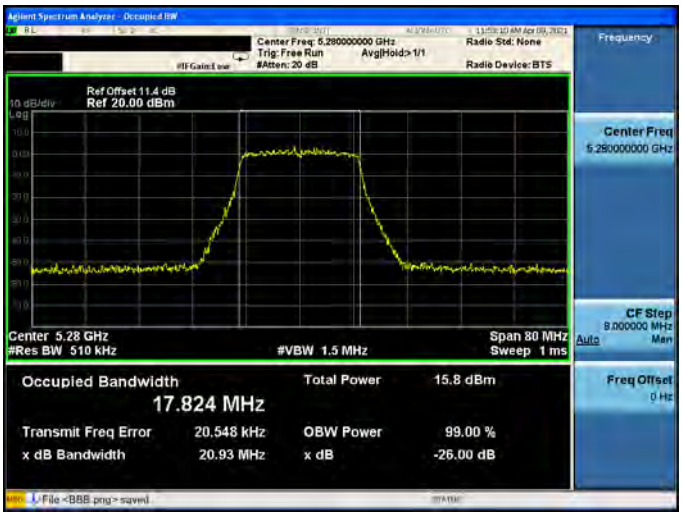
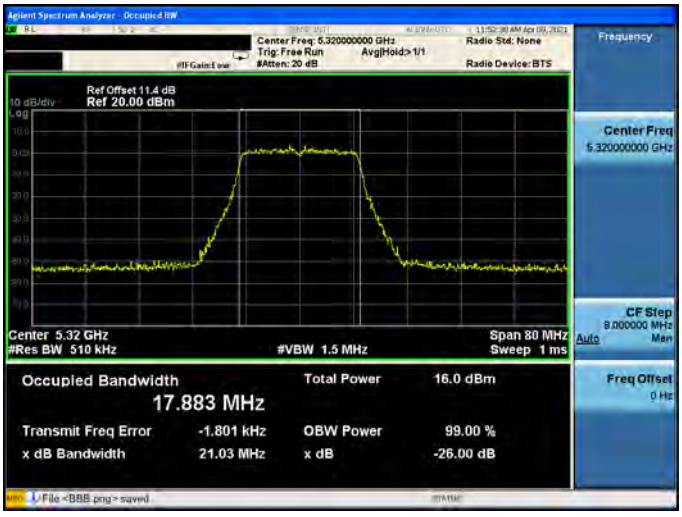
Mode 11: IEEE 802.11n 5 GHz 20 MHz Continuous TX Mode_ANT-2	
5260 MHz	
5280 MHz	
5320 MHz	

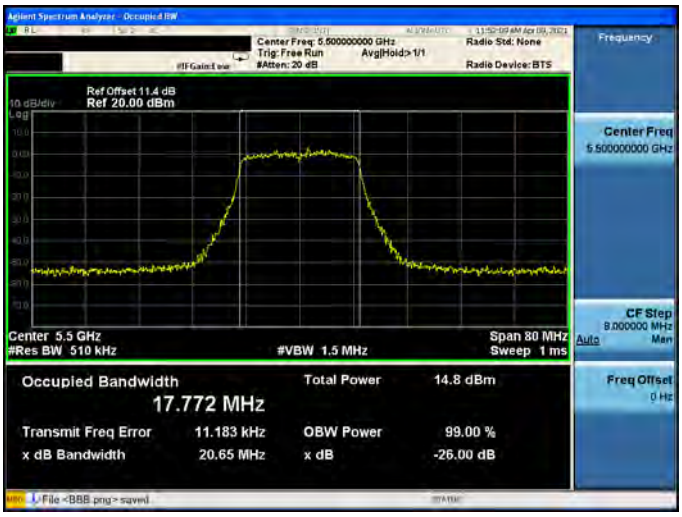
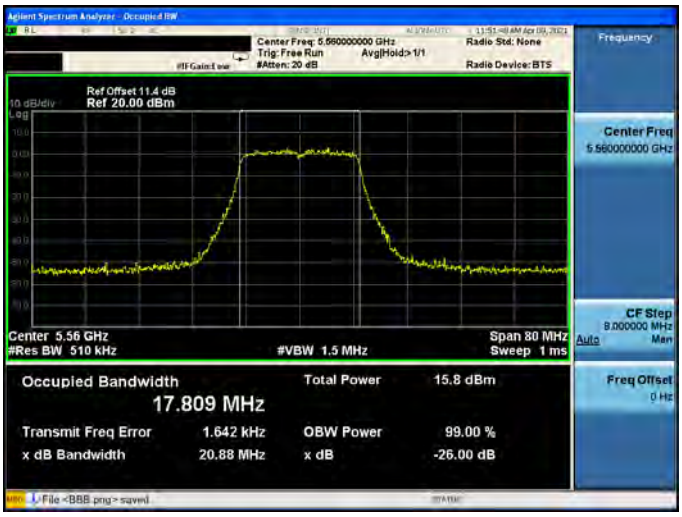
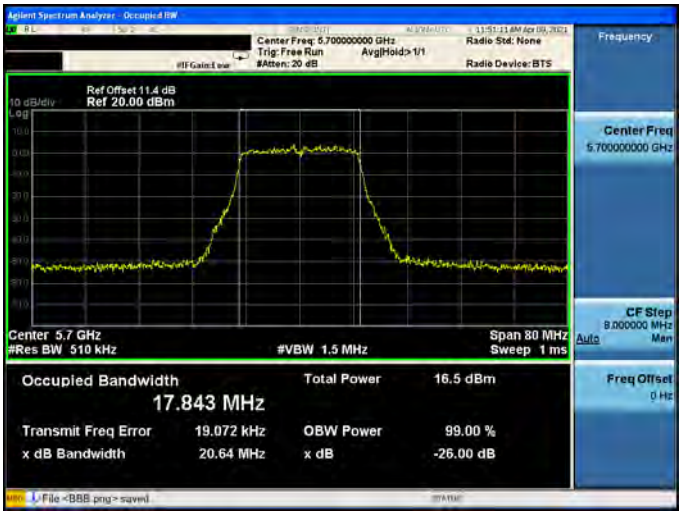
Mode 11: IEEE 802.11n 5 GHz 20 MHz Continuous TX Mode_ANT-2	
5500 MHz	
5560 MHz	
5700 MHz	

Mode 12: IEEE 802.11n 5 GHz 40 MHz Continuous TX Mode_ANT-2	
5270 MHz	
5310 MHz	

Mode 12: IEEE 802.11n 5 GHz 40 MHz Continuous TX Mode_ANT-2	
5510 MHz	
5550 MHz	
5670 MHz	

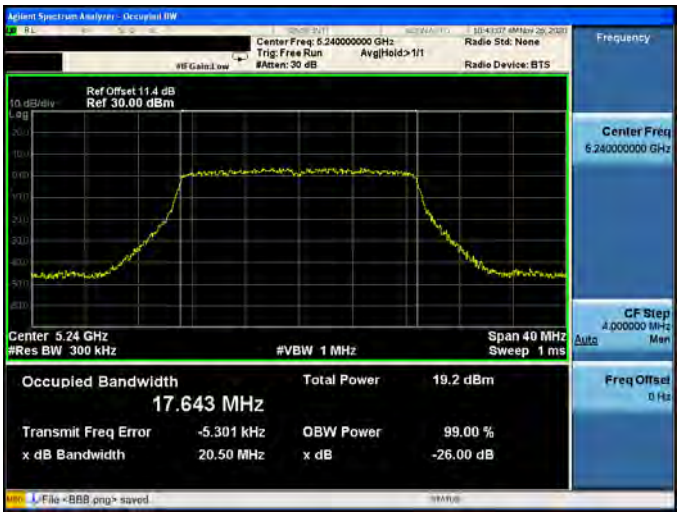Mode 13: IEEE 802.11ac 20 MHz Continuous TX Mode_ ANT-2	
5180 MHz	
5200 MHz	
5240 MHz	

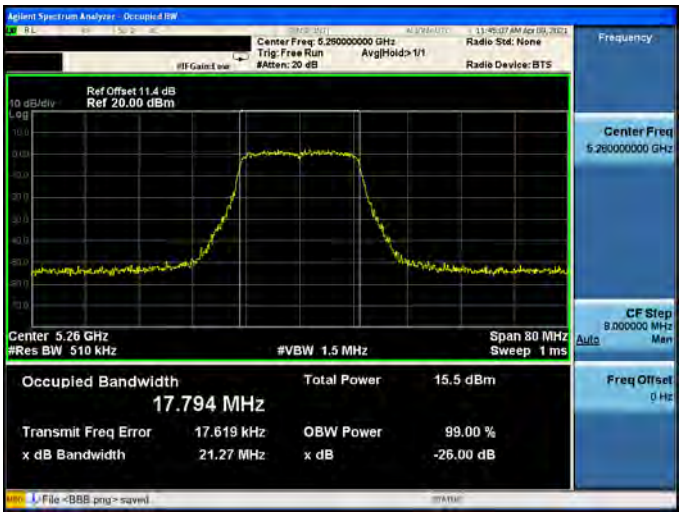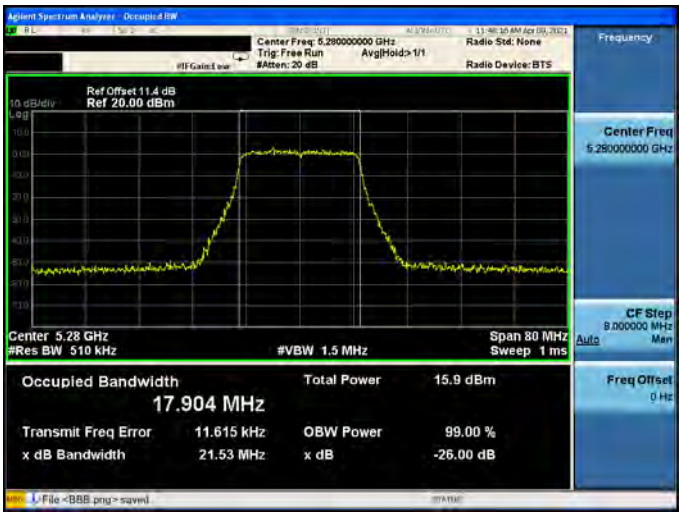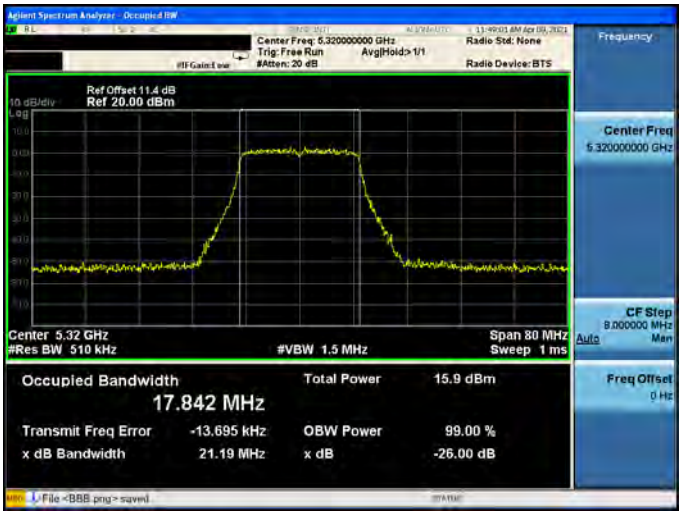Mode 13: IEEE 802.11ac 20 MHz Continuous TX Mode_ANT-2	
5260 MHz	
5280 MHz	
5320 MHz	

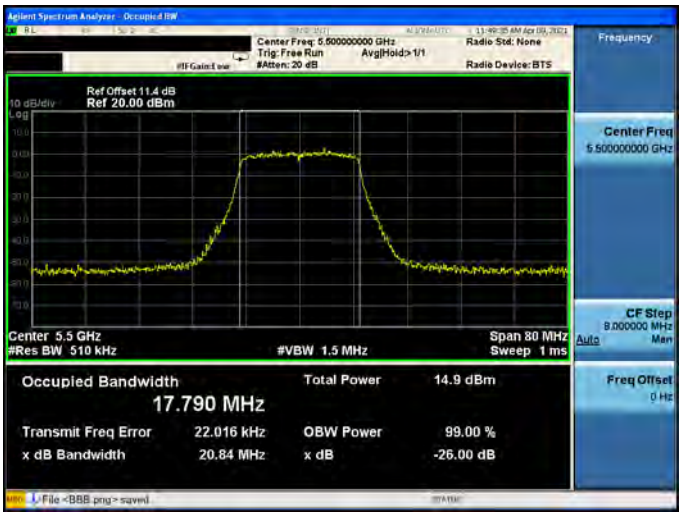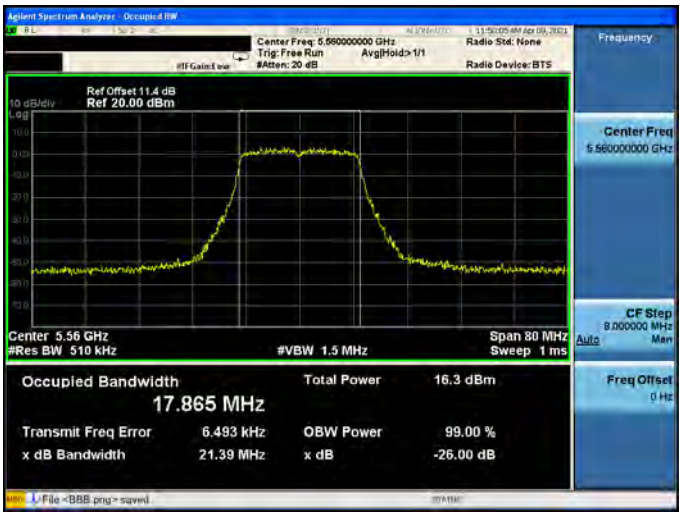
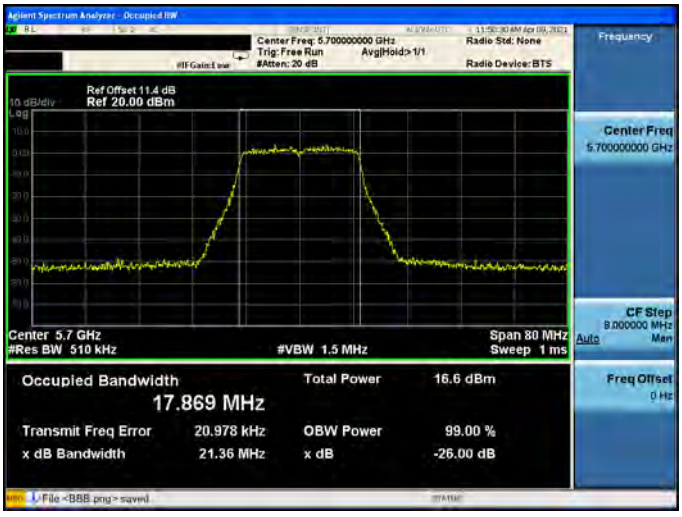
Mode 13: IEEE 802.11ac 20 MHz Continuous TX Mode_ANT-2	
5500 MHz	
5560 MHz	
5700 MHz	



Mode 14: IEEE 802.11ac 40 MHz Continuous TX Mode_ ANT-2	
5190 MHz	
5230 MHz	




Mode 14: IEEE 802.11ac 40 MHz Continuous TX Mode_ANT-2	
5270 MHz	
5310 MHz	

Mode 14: IEEE 802.11ac 40 MHz Continuous TX Mode_ANT-2	
5510 MHz	
5550 MHz	
5670 MHz	



Mode 15: IEEE 802.11ac 80 MHz Continuous TX Mode_ANT-2	
5210 MHz	
5290 MHz	
5530 MHz	

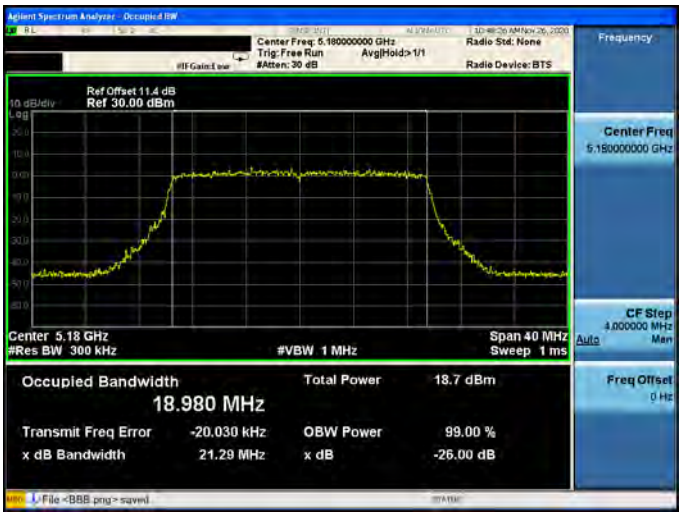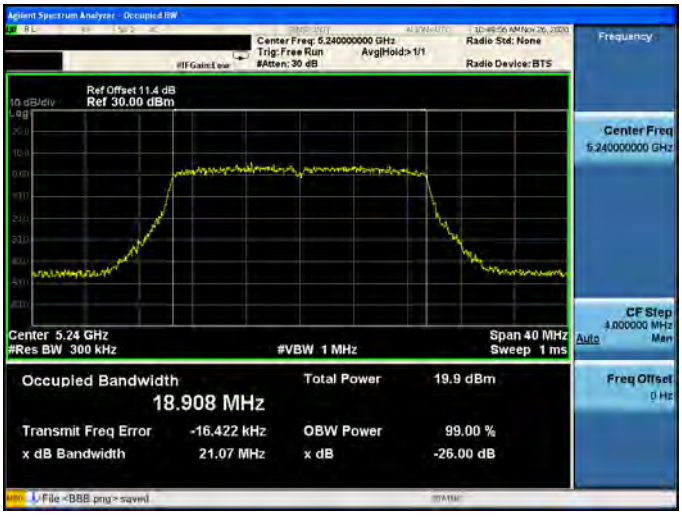Mode 16: IEEE 802.11ax 20 MHz Continuous TX Mode_ANT-2	
5180 MHz	
5200 MHz	
5240 MHz	

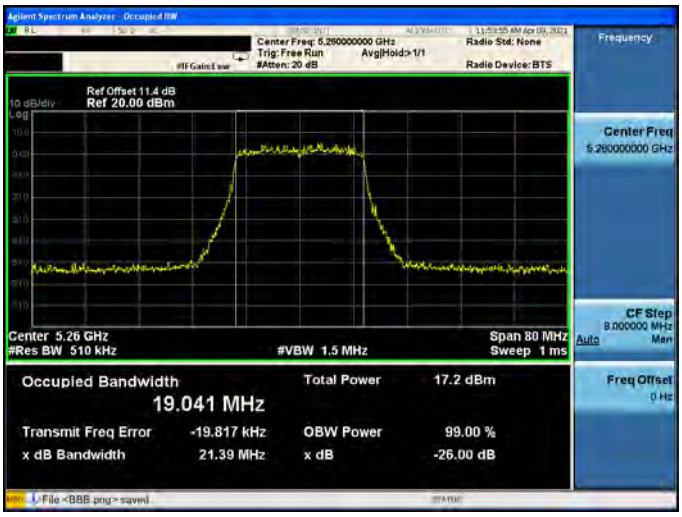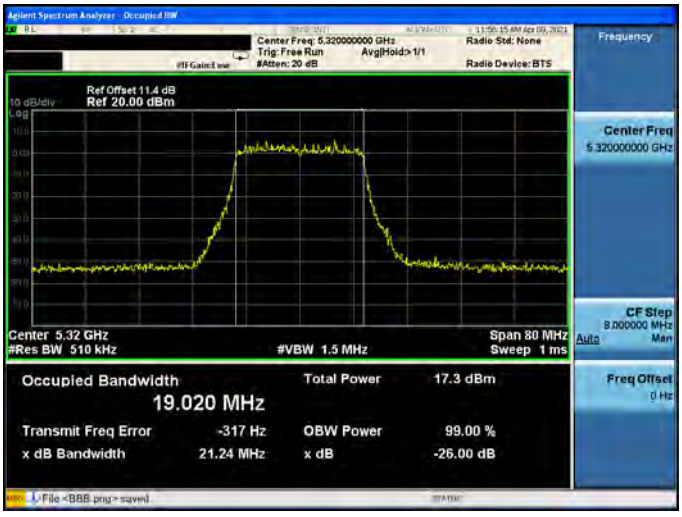
Mode 16: IEEE 802.11ax 20 MHz Continuous TX Mode_ANT-2	
5260 MHz	
5280 MHz	
5320 MHz	

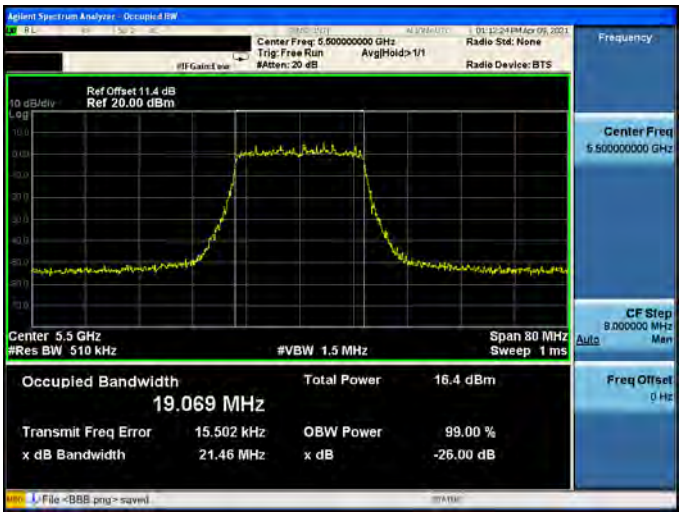
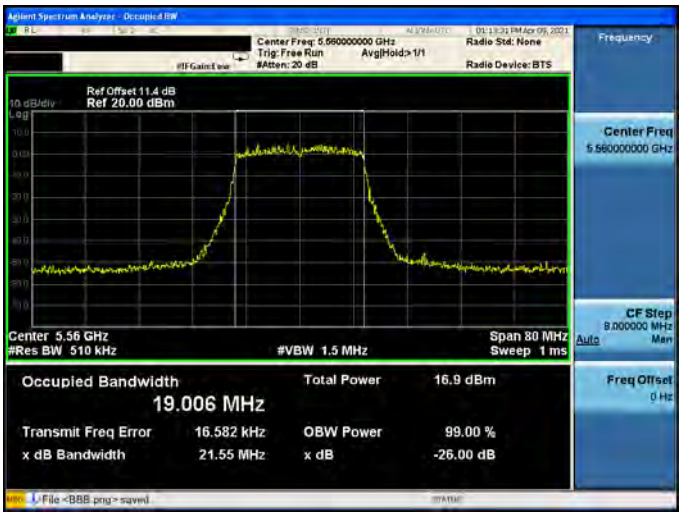
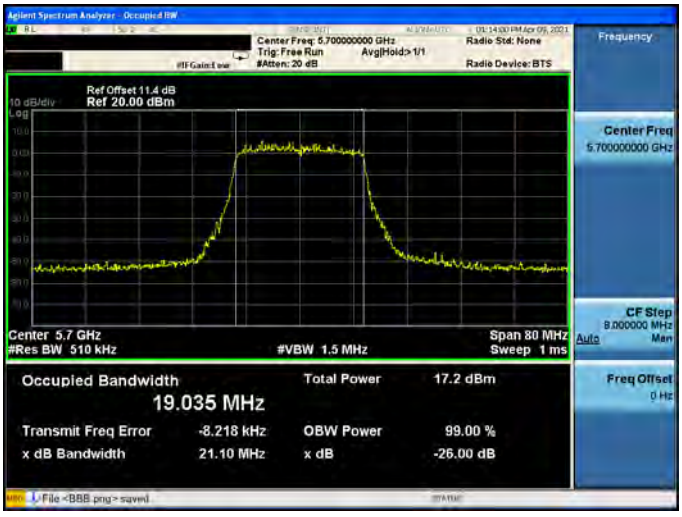
Mode 16: IEEE 802.11ax 20 MHz Continuous TX Mode_ANT-2	
5500 MHz	
5560 MHz	
5700 MHz	




Mode 17: IEEE 802.11ax 40 MHz Continuous TX Mode_ANT-2	
5190 MHz	
5230 MHz	

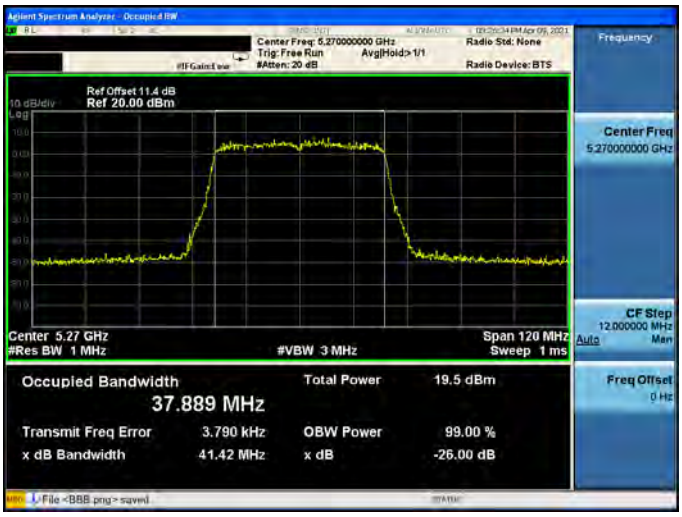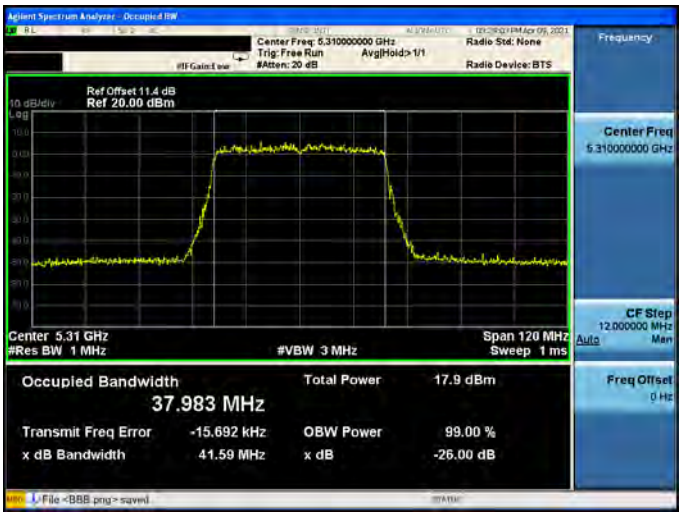Mode 17: IEEE 802.11ax 40 MHz Continuous TX Mode_ANT-2	
5270 MHz	
5310 MHz	

Mode 17: IEEE 802.11ax 40 MHz Continuous TX Mode_ANT-2	
5510 MHz	
5550 MHz	
5670 MHz	


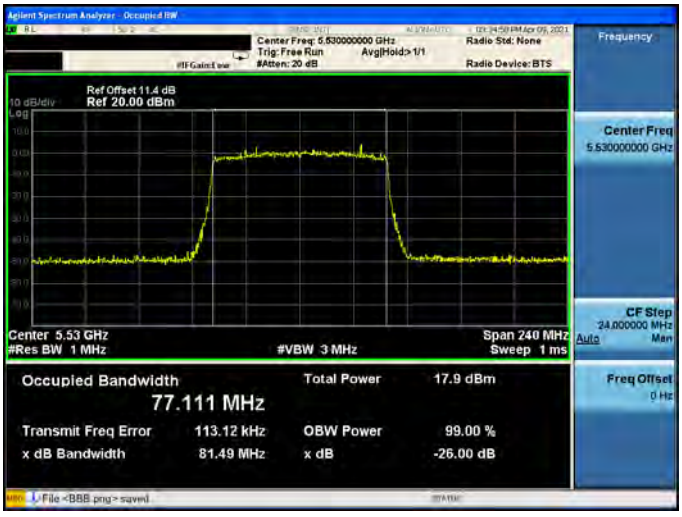
Mode 18: IEEE 802.11ax 80 MHz Continuous TX Mode_ANT-2	
5210 MHz	
5290 MHz	
5530 MHz	

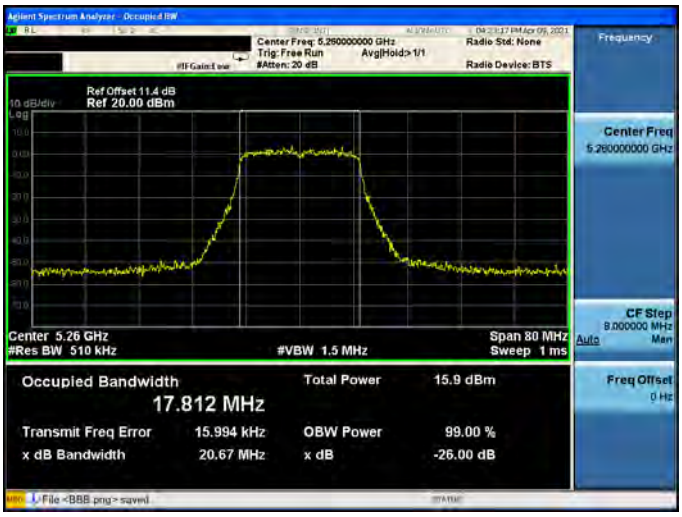
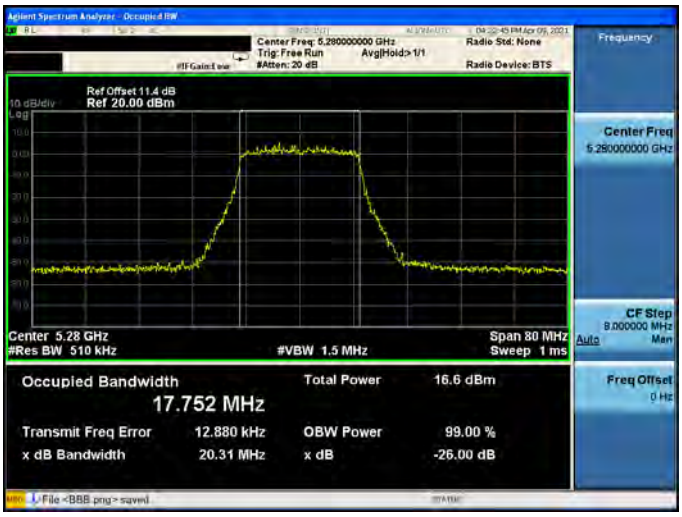
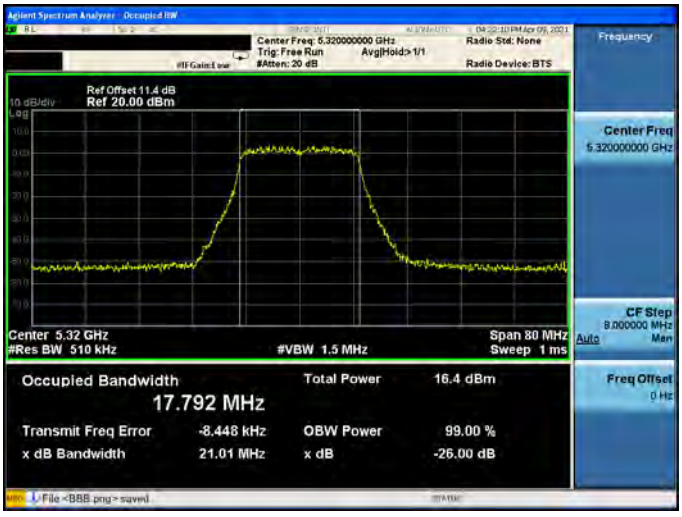
Mode 11: IEEE 802.11n 5 GHz 20 MHz Continuous TX Mode_ANT-3	
5260 MHz	
5280 MHz	
5320 MHz	

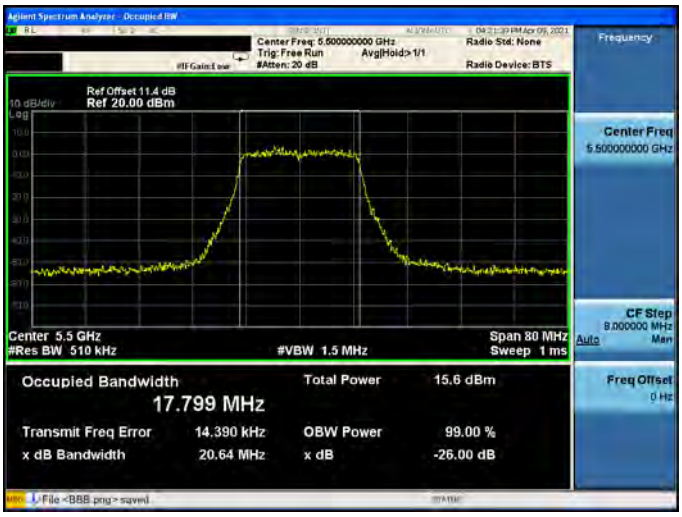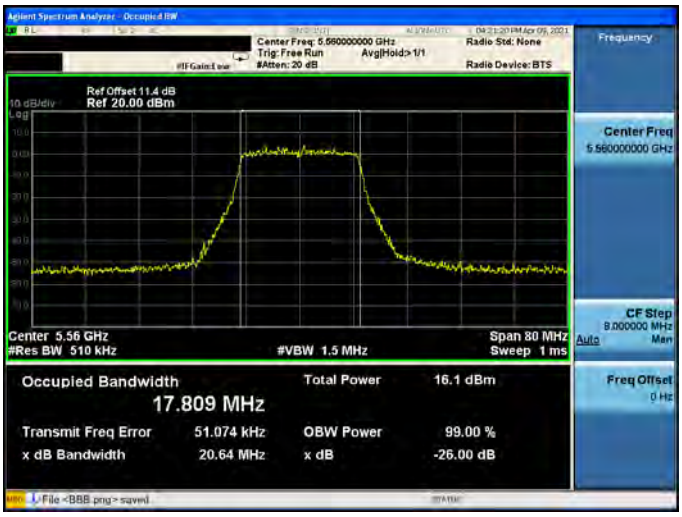
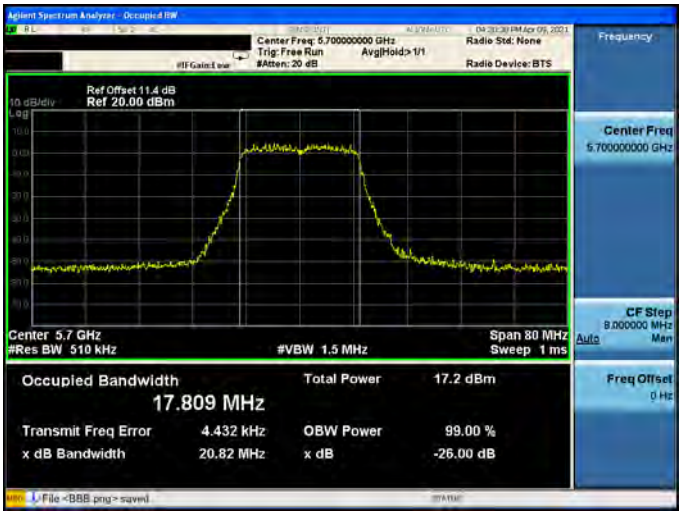
Mode 11: IEEE 802.11n 5 GHz 20 MHz Continuous TX Mode_ANT-3	
5500 MHz	
5560 MHz	
5700 MHz	

Mode 12: IEEE 802.11n 5 GHz 40 MHz Continuous TX Mode_ANT-3	
5270 MHz	
5310 MHz	


Mode 12: IEEE 802.11n 5 GHz 40 MHz Continuous TX Mode_ANT-3	
5510 MHz	
5550 MHz	
5670 MHz	

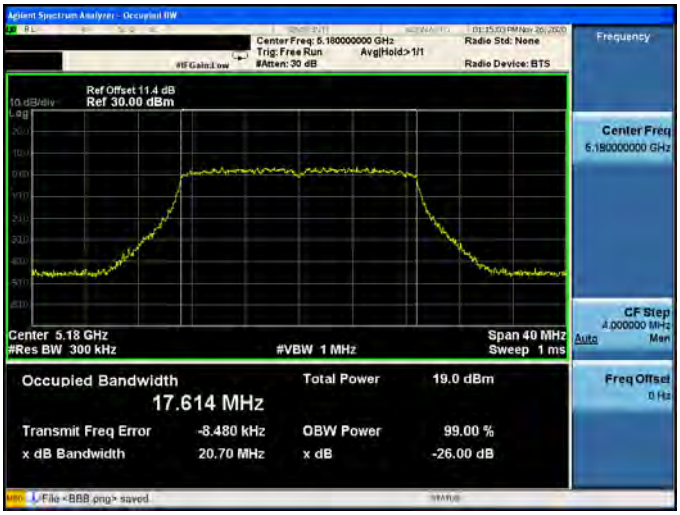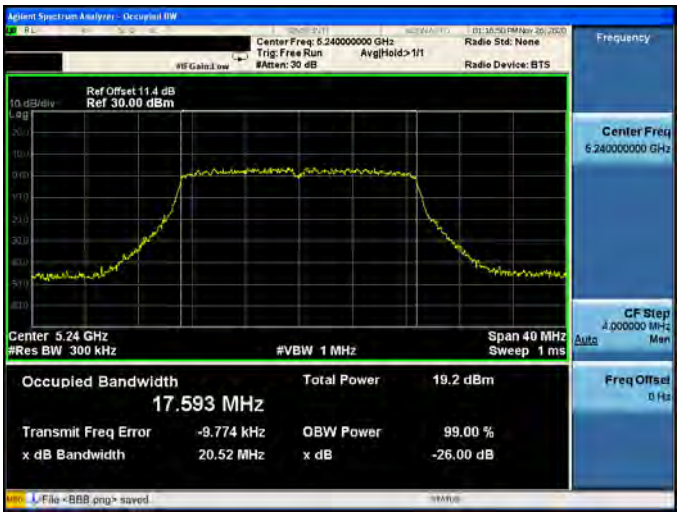Mode 13: IEEE 802.11ac 20 MHz Continuous TX Mode_ ANT-3	
5180 MHz	
5200 MHz	
5240 MHz	

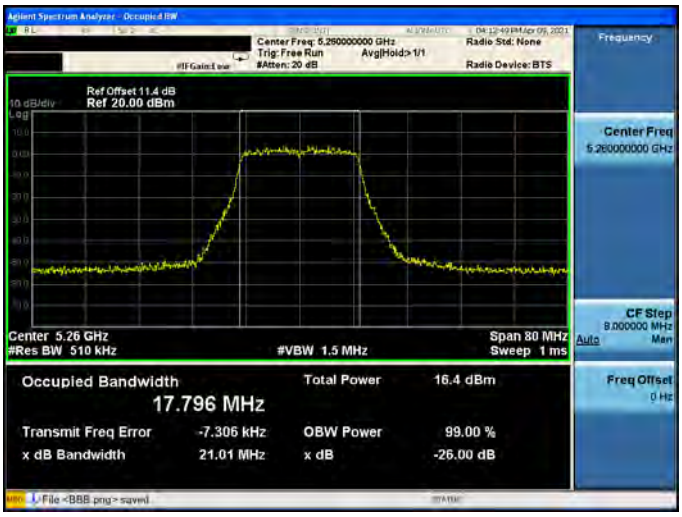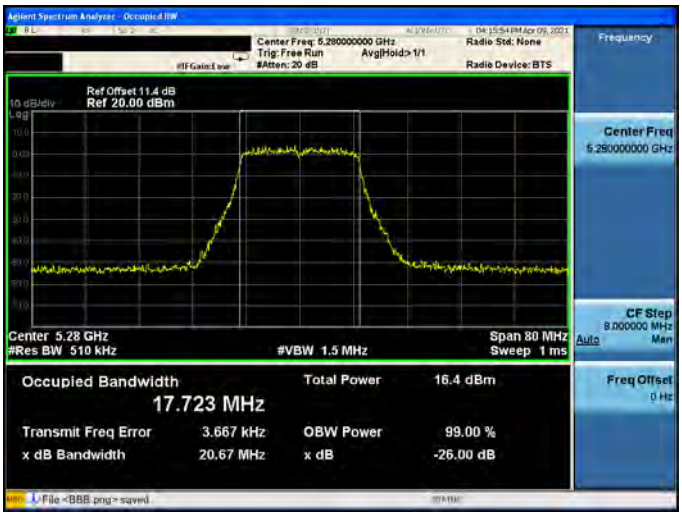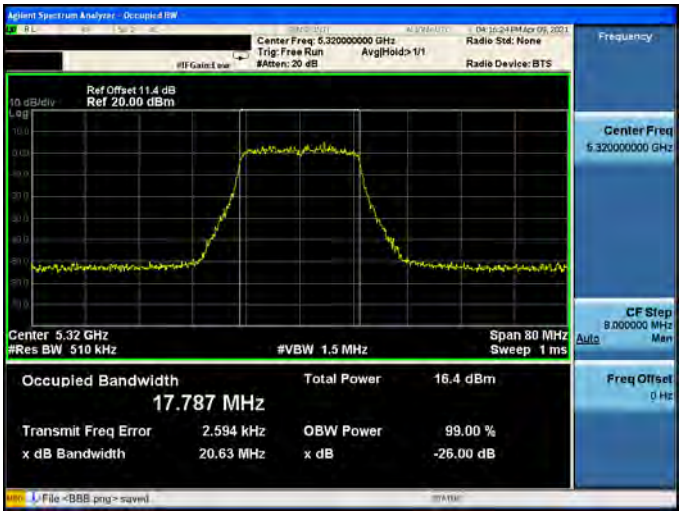
Mode 13: IEEE 802.11ac 20 MHz Continuous TX Mode_ANT-3	
5260 MHz	
5280 MHz	
5320 MHz	

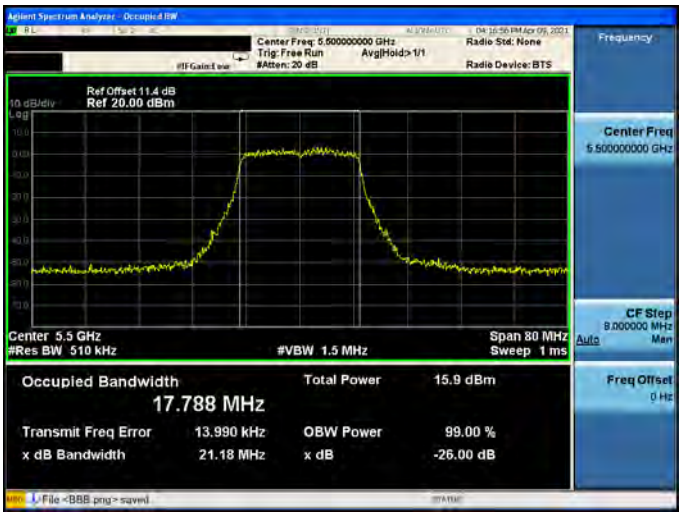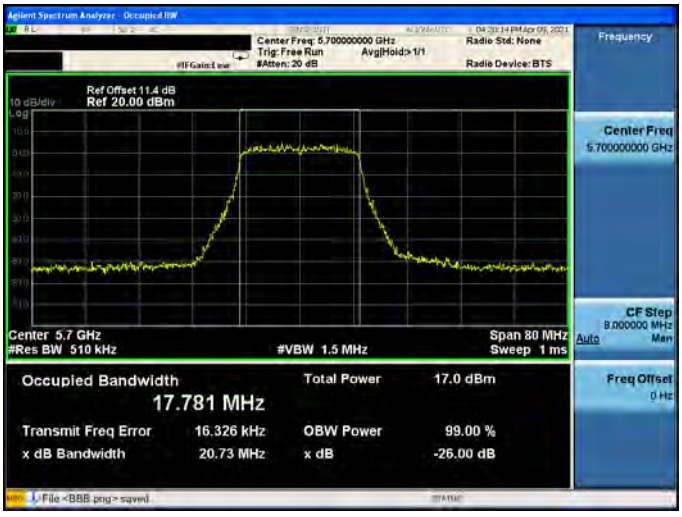
Mode 13: IEEE 802.11ac 20 MHz Continuous TX Mode_ANT-3	
5500 MHz	
5560 MHz	
5700 MHz	




Mode 14: IEEE 802.11ac 40 MHz Continuous TX Mode_ ANT-3	
5190 MHz	
5230 MHz	



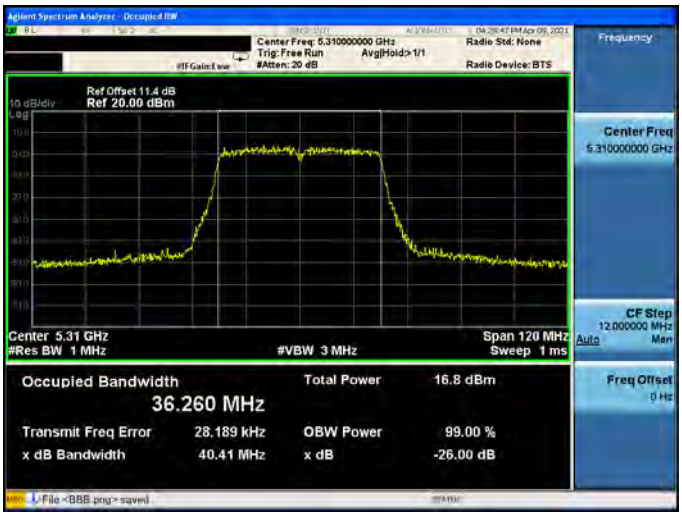
Mode 14: IEEE 802.11ac 40 MHz Continuous TX Mode_ANT-3	
5270 MHz	
5310 MHz	

Mode 14: IEEE 802.11ac 40 MHz Continuous TX Mode_ANT-3	
5510 MHz	
5550 MHz	
5670 MHz	

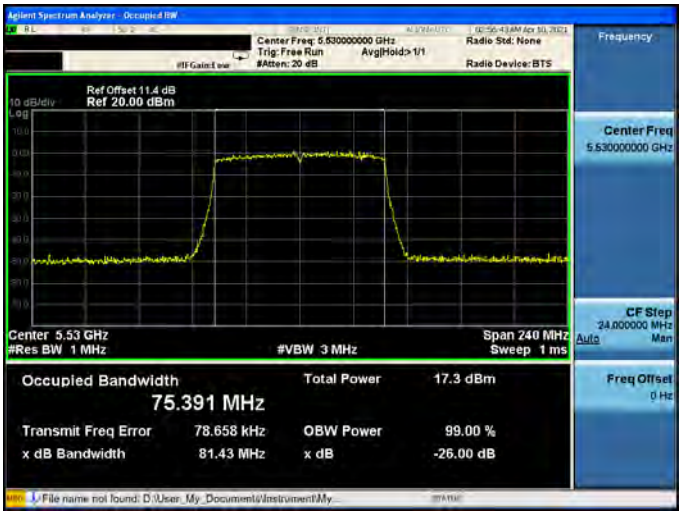
Mode 15: IEEE 802.11ac 80 MHz Continuous TX Mode_ANT-3	
5210 MHz	
5290 MHz	
5530 MHz	

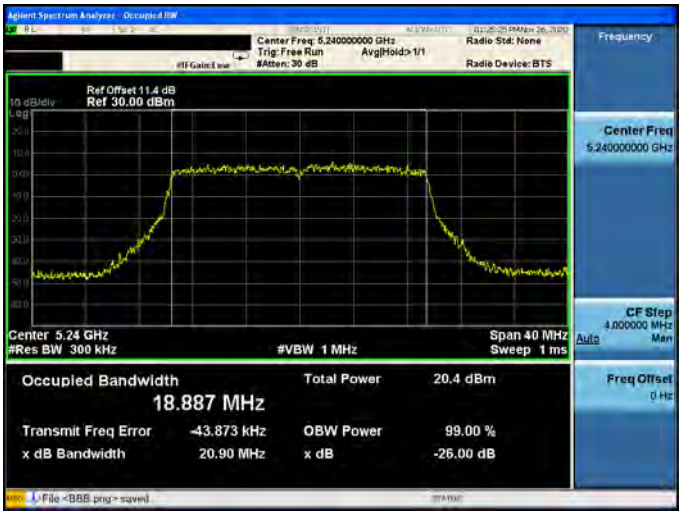
Mode 16: IEEE 802.11ax 20 MHz Continuous TX Mode_ANT-3	
5180 MHz	
5200 MHz	
5240 MHz	

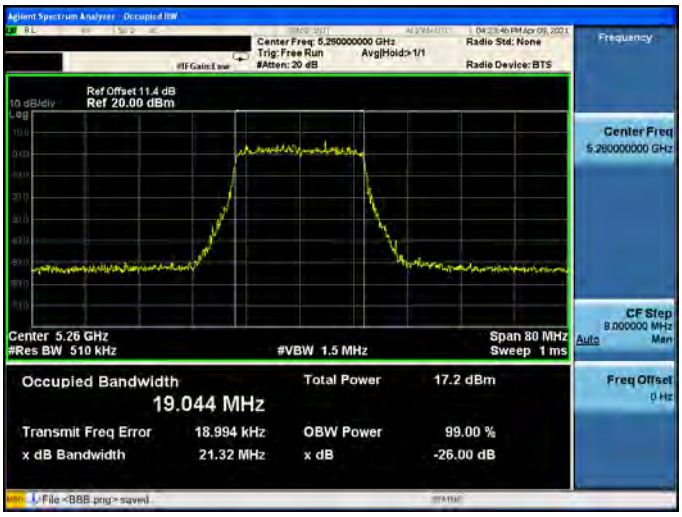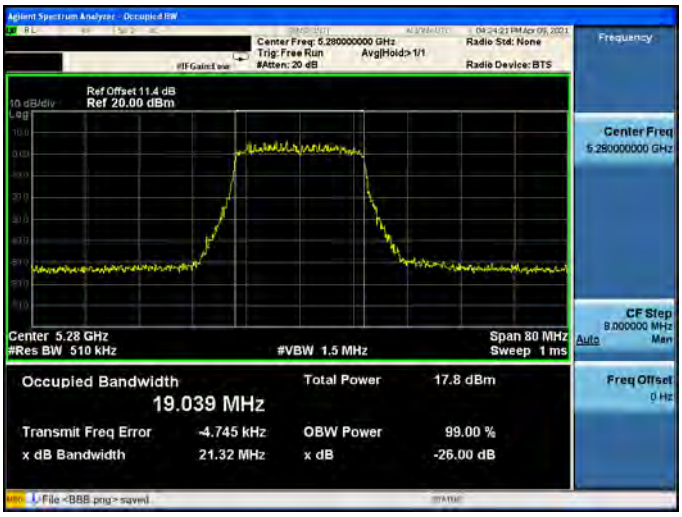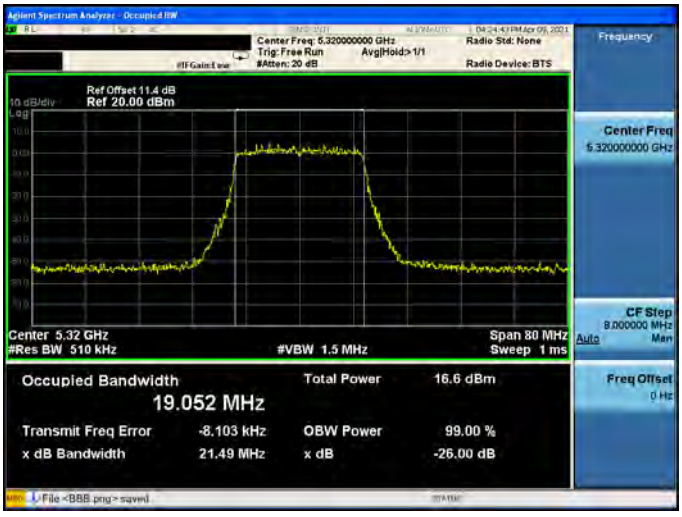
Mode 16: IEEE 802.11ax 20 MHz Continuous TX Mode_ANT-3	
5260 MHz	
5280 MHz	
5320 MHz	

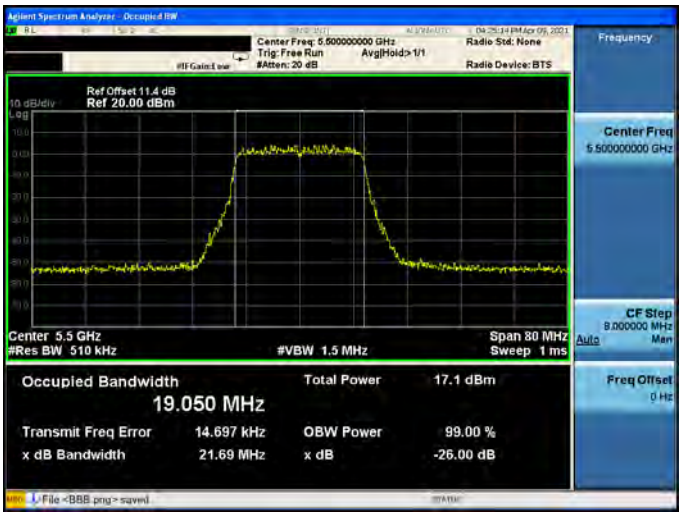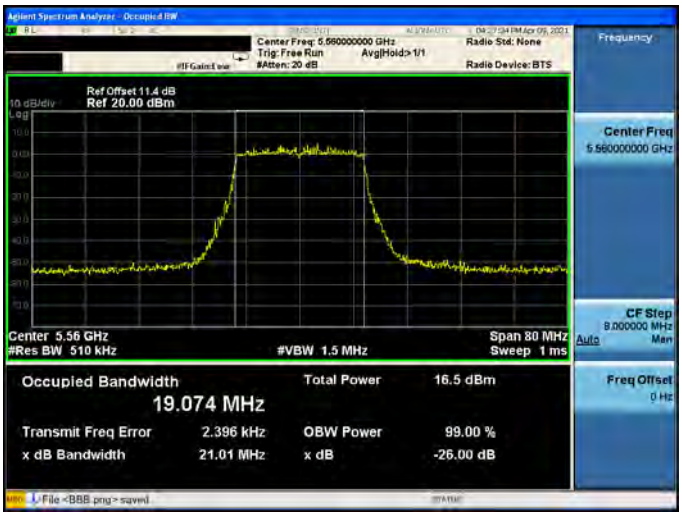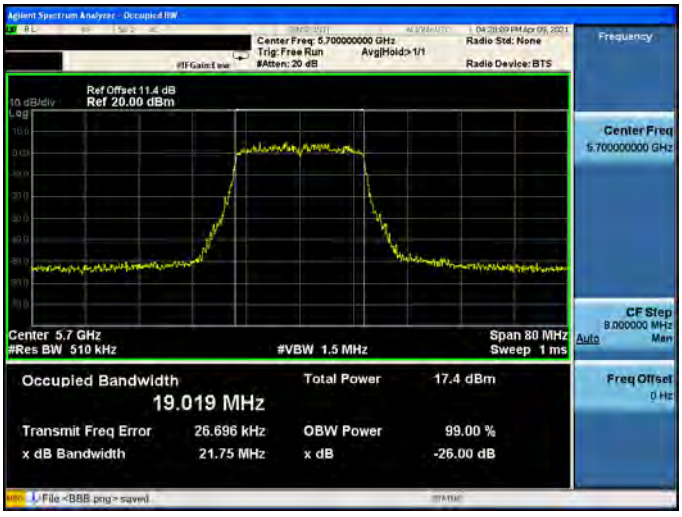Mode 16: IEEE 802.11ax 20 MHz Continuous TX Mode_ANT-3	
5500 MHz	
5560 MHz	
5700 MHz	

Mode 17: IEEE 802.11ax 40 MHz Continuous TX Mode_ANT-3	
5190 MHz	
5230 MHz	

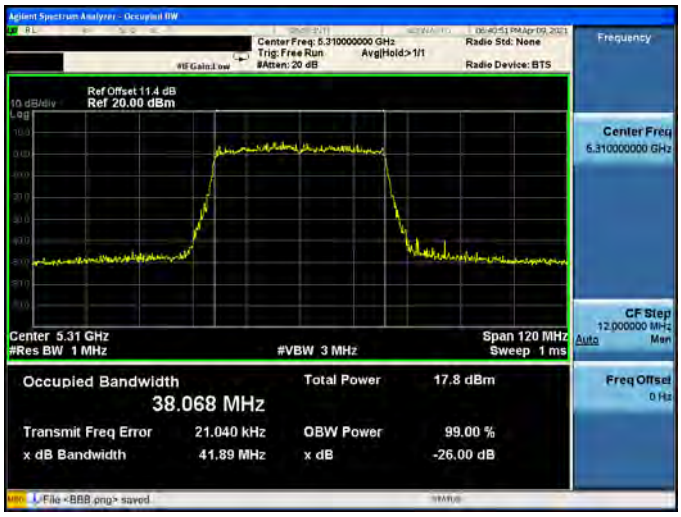Mode 17: IEEE 802.11ax 40 MHz Continuous TX Mode_ANT-3	
5270 MHz	
5310 MHz	

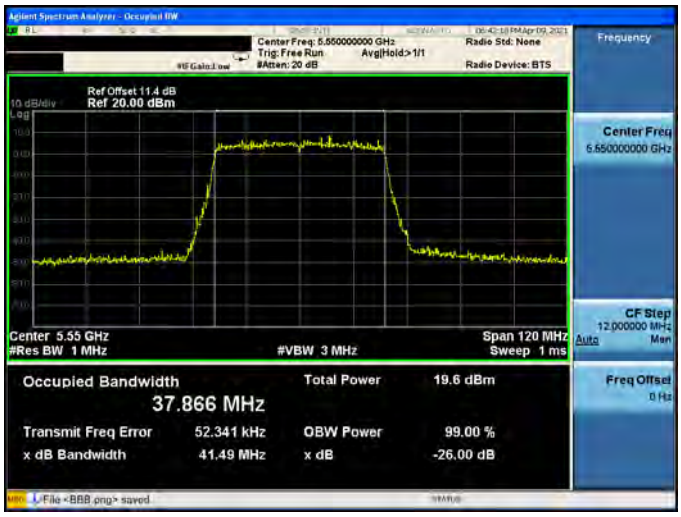Mode 17: IEEE 802.11ax 40 MHz Continuous TX Mode_ANT-3	
5510 MHz	
5550 MHz	
5670 MHz	

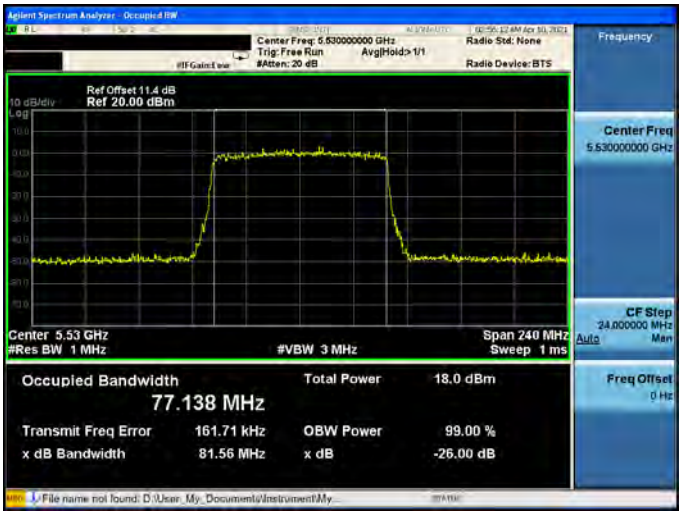Mode 18: IEEE 802.11ax 80 MHz Continuous TX Mode_ANT-3	
5210 MHz	
5290 MHz	
5530 MHz	


6 dB Bandwidth


Test Mode	Frequency (MHz)	6 dB Bandwidth (kHz)				Limit (kHz)
		ANT-0	ANT-1	ANT-2	ANT-3	
Mode 10	5745	16310	16340	16390	16330	≥ 500
	5785	16340	16330	16380	16310	≥ 500
	5825	16320	15830	16360	16320	≥ 500
Mode 13	5745	16590	17590	17160	17270	≥ 500
	5785	17600	17590	17360	17570	≥ 500
	5825	17570	16280	17160	17600	≥ 500
Mode 14	5755	35720	35980	36410	36310	≥ 500
	5795	35880	36360	35700	35780	≥ 500
Mode 15	5775	75230	76380	73170	74530	≥ 500
Mode 16	5745	18970	18730	18830	18700	≥ 500
	5785	18930	18920	18380	18590	≥ 500
	5825	18980	18920	18700	18660	≥ 500
Mode 17	5755	37720	37840	37990	37880	≥ 500
	5795	37870	37540	37280	37610	≥ 500
Mode 18	5775	76430	77560	77060	77410	≥ 500


Beamforming on

Test Mode	Frequency (MHz)	6 dB Bandwidth (kHz)				Limit (kHz)
		ANT-0	ANT-1	ANT-2	ANT-3	
Mode 13	5745	17570	17670	17600	17630	≥ 500
	5785	17660	17640	17600	17560	≥ 500
	5825	17580	17590	17590	17630	≥ 500
Mode 14	5755	36040	36010	35970	36340	≥ 500
	5795	36360	36290	35720	36420	≥ 500
Mode 15	5775	75610	75650	75290	70270	≥ 500
Mode 16	5745	18970	18980	18510	18960	≥ 500
	5785	18140	17640	18780	19010	≥ 500
	5825	18890	18900	18810	18920	≥ 500
Mode 17	5755	37940	38240	37850	37950	≥ 500
	5795	37730	37940	37140	38030	≥ 500
Mode 18	5775	77250	77340	76630	77890	≥ 500

Mode 10: IEEE 802.11a Continuous TX Mode_ANT-0		
5745 MHz		
5785 MHz		
5825 MHz		

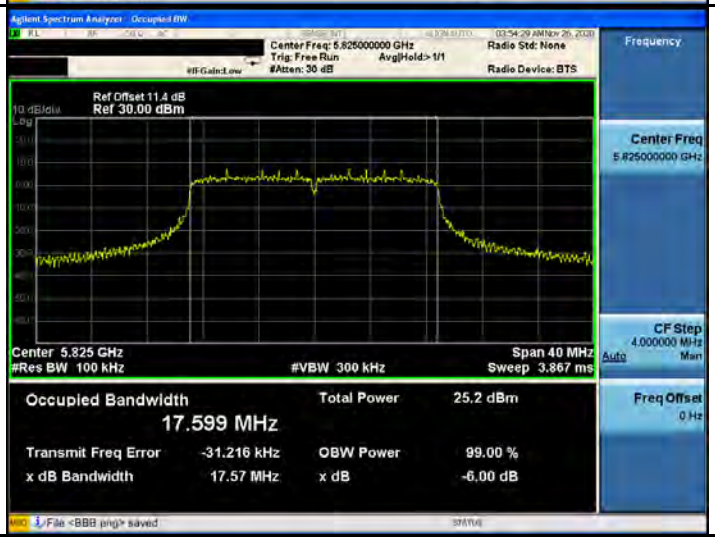
Mode 13: IEEE 802.11ac 20 MHz Continuous TX Mode_ANT-0		
5745 MHz		
5785 MHz		
5825 MHz		

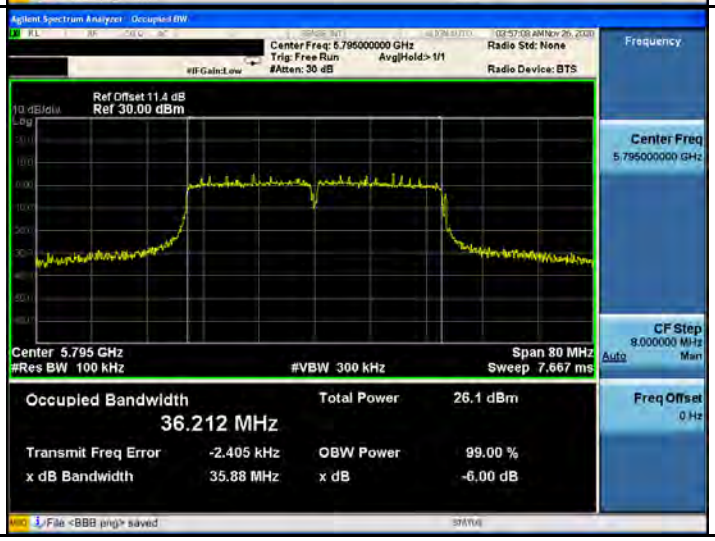Mode 14: IEEE 802.11ac 40 MHz Continuous TX Mode_ANT-0		
5755 MHz		
5795 MHz		

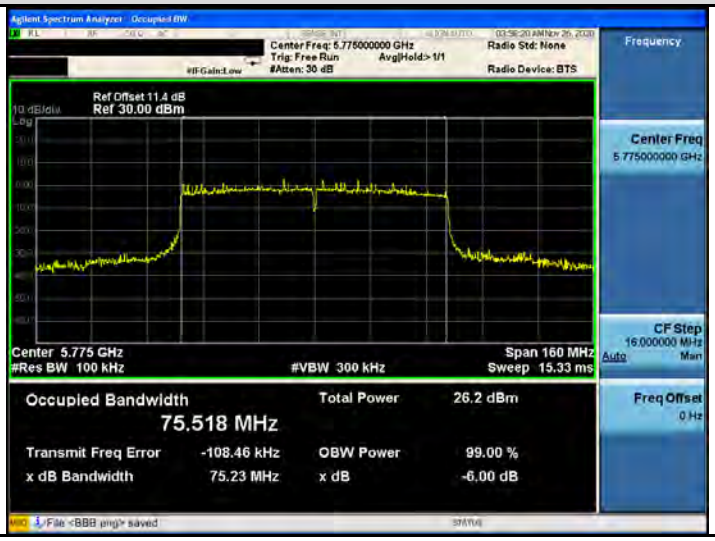Mode 15: IEEE 802.11ac 80 MHz Continuous TX Mode_ANT-0		
5775 MHz		

Mode 16: IEEE 802.11ax 20 MHz Continuous TX Mode_ANT-0		
5745 MHz		
5785 MHz		
5825 MHz		

Mode 17: IEEE 802.11ax 40 MHz Continuous TX Mode_ANT-0		
5755 MHz		
5795 MHz		

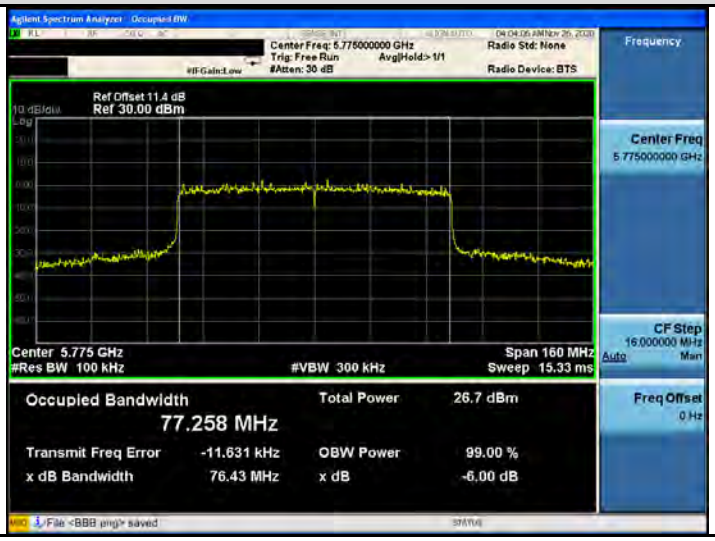Mode 18: IEEE 802.11ax 80 MHz Continuous TX Mode_ANT-0		
5775 MHz			


Mode 10: IEEE 802.11a Continuous TX Mode_ANT-1		
5745 MHz		
5785 MHz		
5825 MHz		

Mode 13: IEEE 802.11ac 20 MHz Continuous TX Mode_ANT-1		
5745 MHz		
5785 MHz		
5825 MHz		

Mode 14: IEEE 802.11ac 40 MHz Continuous TX Mode_ANT-1		
5755 MHz		
5795 MHz		

Mode 15: IEEE 802.11ac 80 MHz Continuous TX Mode_ANT-1		
5775 MHz		

Mode 16: IEEE 802.11ax 20 MHz Continuous TX Mode_ANT-1		
5745 MHz		
5785 MHz		
5825 MHz		

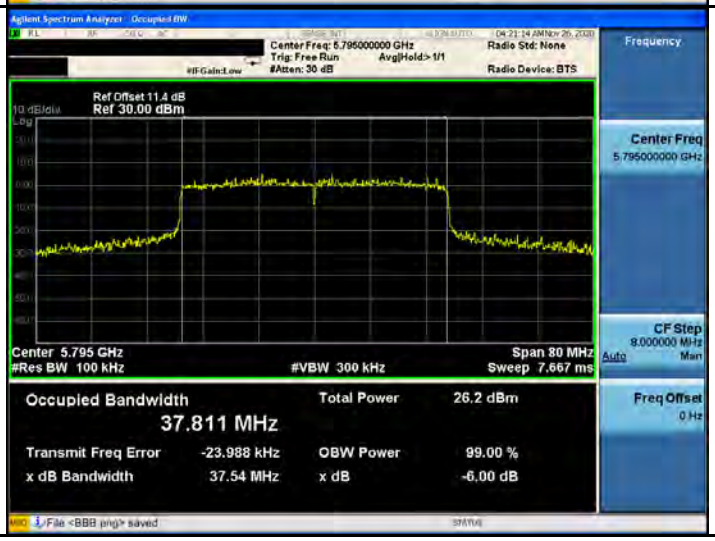Mode 17: IEEE 802.11ax 40 MHz Continuous TX Mode_ANT-1		
5755 MHz		
5795 MHz		

Mode 18: IEEE 802.11ax 80 MHz Continuous TX Mode_ANT-1		
5775 MHz		

Mode 10: IEEE 802.11a Continuous TX Mode_ANT-2			
5745 MHz			
5785 MHz			
5825 MHz			

Mode 13: IEEE 802.11ac 20 MHz Continuous TX Mode_ANT-2		
5745 MHz		
5785 MHz		
5825 MHz		

Mode 14: IEEE 802.11ac 40 MHz Continuous TX Mode_ANT-2		
5755 MHz		
5795 MHz		

Mode 15: IEEE 802.11ac 80 MHz Continuous TX Mode_ANT-2		
5775 MHz		

Mode 16: IEEE 802.11ax 20 MHz Continuous TX Mode_ANT-2		
5745 MHz		
5785 MHz		
5825 MHz		

Mode 17: IEEE 802.11ax 40 MHz Continuous TX Mode_ANT-2		
5755 MHz		
5795 MHz		

Mode 18: IEEE 802.11ax 80 MHz Continuous TX Mode_ANT-2		
5775 MHz		

Mode 10: IEEE 802.11a Continuous TX Mode_ANT-3		
5745 MHz		
5785 MHz		
5825 MHz		

Mode 13: IEEE 802.11ac 20 MHz Continuous TX Mode_ANT-3		
5745 MHz		
5785 MHz		
5825 MHz		

Mode 14: IEEE 802.11ac 40 MHz Continuous TX Mode_ANT-3		
5755 MHz		
5795 MHz		



Mode 15: IEEE 802.11ac 80 MHz Continuous TX Mode_ANT-3		
5775 MHz		


Mode 16: IEEE 802.11ax 20 MHz Continuous TX Mode_ANT-3		
5745 MHz		
5785 MHz		
5825 MHz		


Mode 17: IEEE 802.11ax 40 MHz Continuous TX Mode_ANT-3		
5755 MHz		
5795 MHz		



Mode 18: IEEE 802.11ax 80 MHz Continuous TX Mode_ANT-3		
5775 MHz		

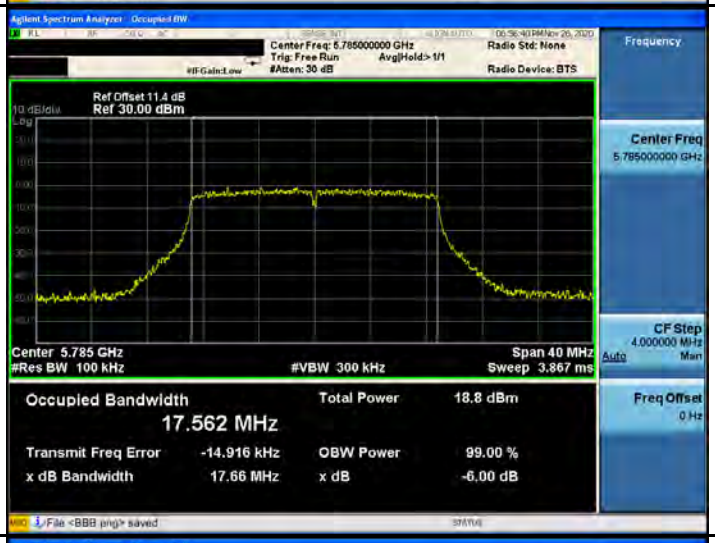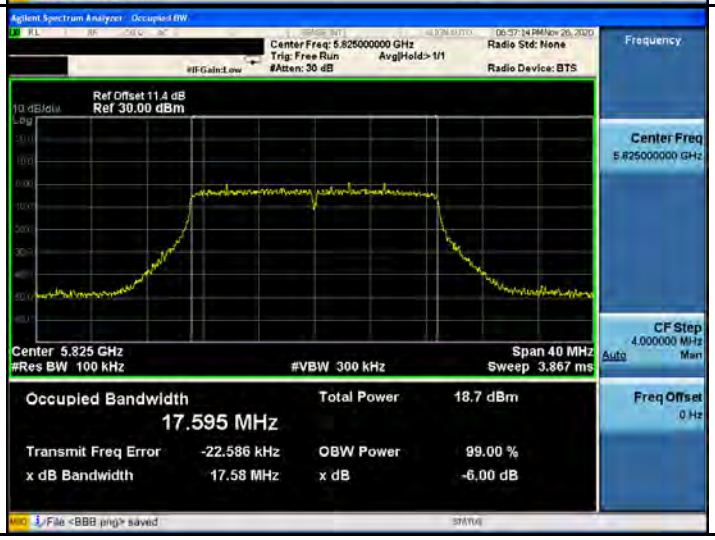
Beamforming on


Mode 13: IEEE 802.11ac 20 MHz Continuous TX Mode_ANT-0		
5745 MHz		
5785 MHz		
5825 MHz		

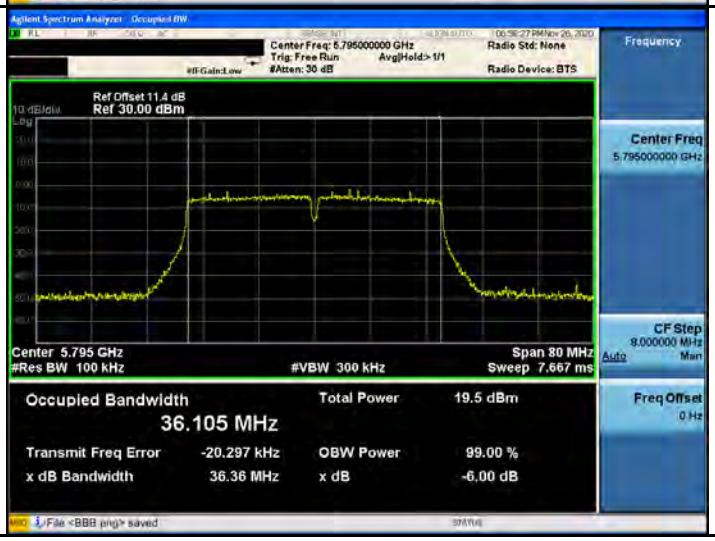
Mode 14: IEEE 802.11ac 40 MHz Continuous TX Mode_ANT-0		
5755 MHz		
5795 MHz		

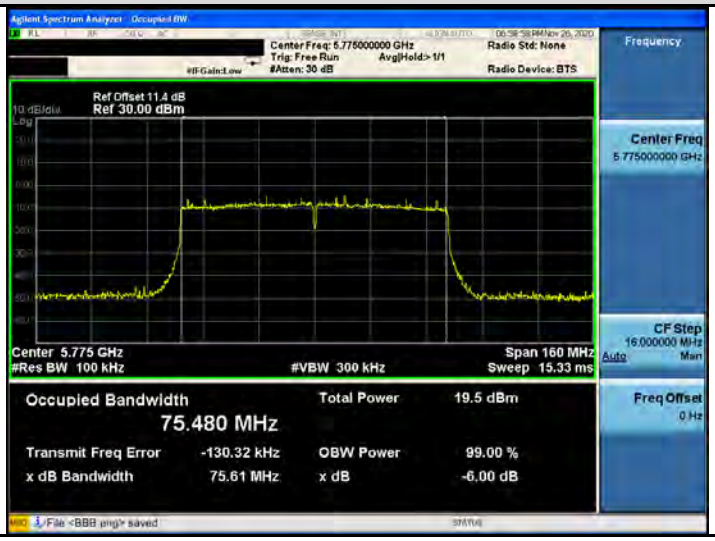
Mode 15: IEEE 802.11ac 80 MHz Continuous TX Mode_ANT-0		
5775 MHz		

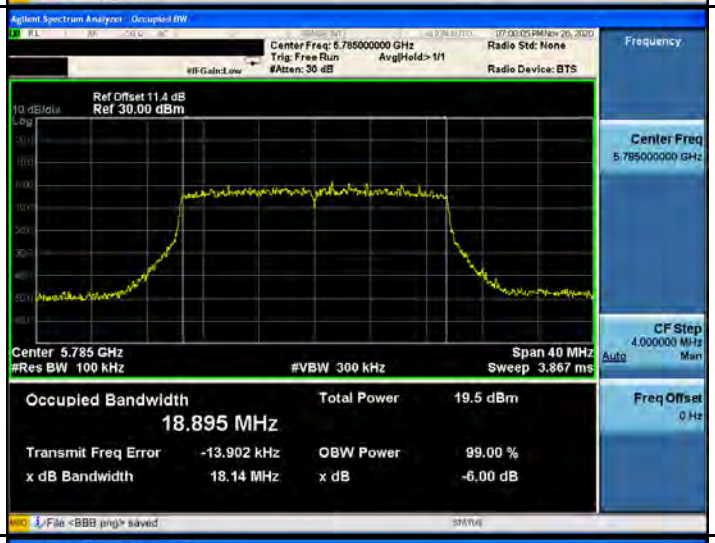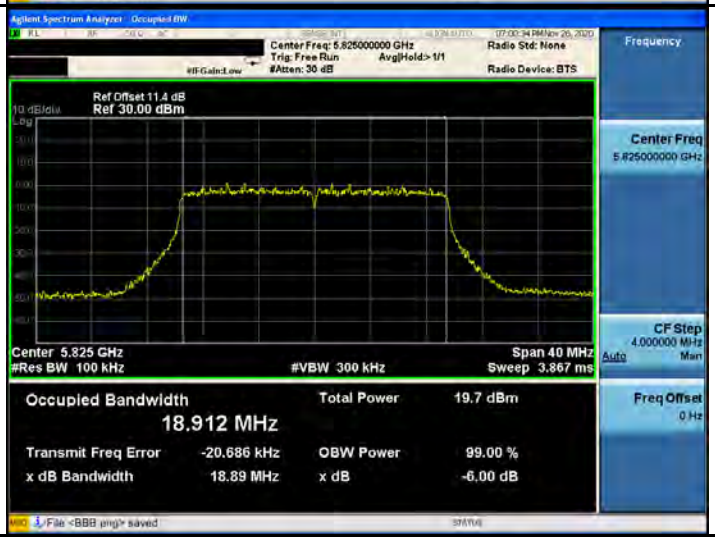
Mode 16: IEEE 802.11ax 20 MHz Continuous TX Mode_ANT-0		
5745 MHz		
5785 MHz		
5825 MHz		

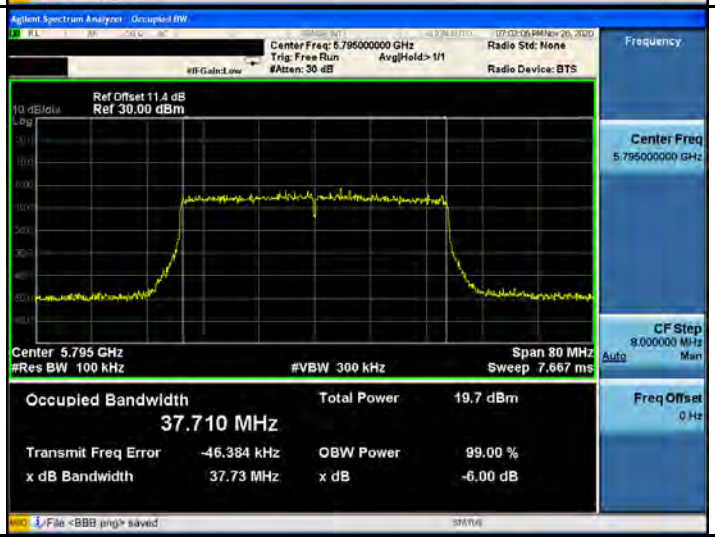
Mode 17: IEEE 802.11ax 40 MHz Continuous TX Mode_ANT-0		
5755 MHz		
5795 MHz		

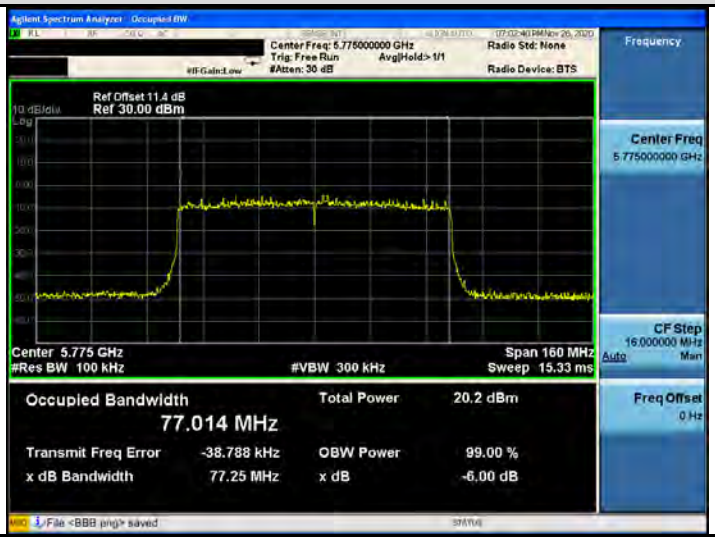
Mode 18: IEEE 802.11ax 80 MHz Continuous TX Mode_ANT-0		
5775 MHz		

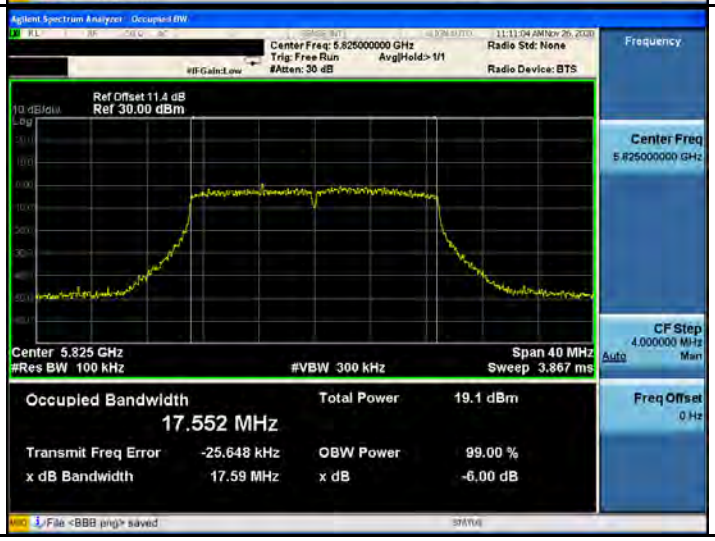
Mode 13: IEEE 802.11ac 20 MHz Continuous TX Mode_ANT-1		
5745 MHz		
5785 MHz		
5825 MHz		



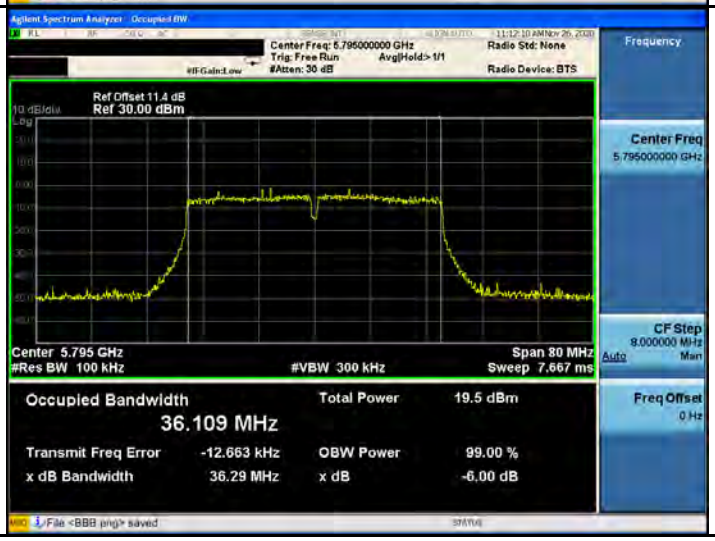
Mode 14: IEEE 802.11ac 40 MHz Continuous TX Mode_ANT-1		
5755 MHz		
5795 MHz		


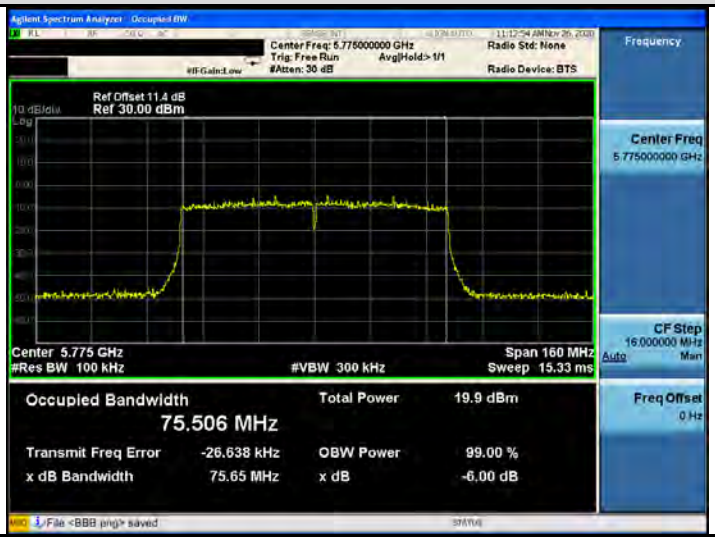
Mode 15: IEEE 802.11ac 80 MHz Continuous TX Mode_ANT-1		
5775 MHz		

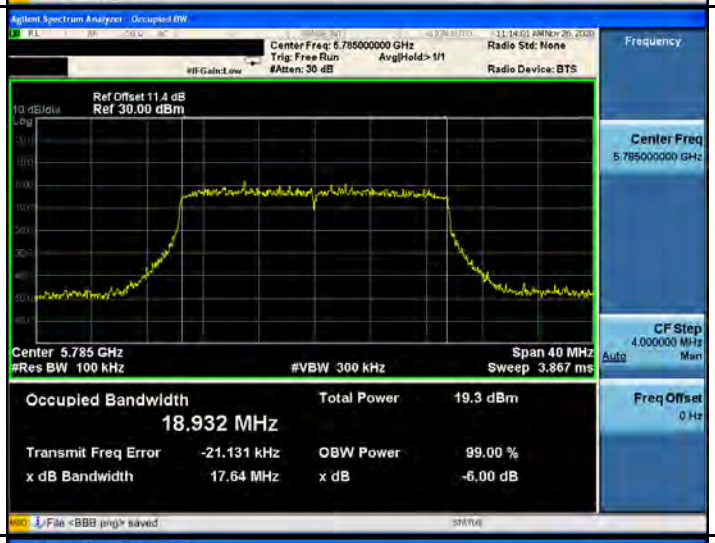
Mode 16: IEEE 802.11ax 20 MHz Continuous TX Mode_ANT-1		
5745 MHz		
5785 MHz		
5825 MHz		

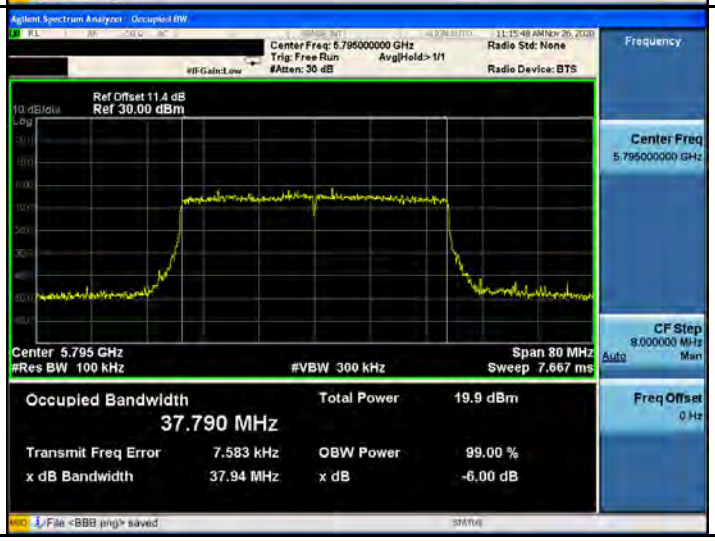
Mode 17: IEEE 802.11ax 40 MHz Continuous TX Mode_ANT-1		
5755 MHz		
5795 MHz		

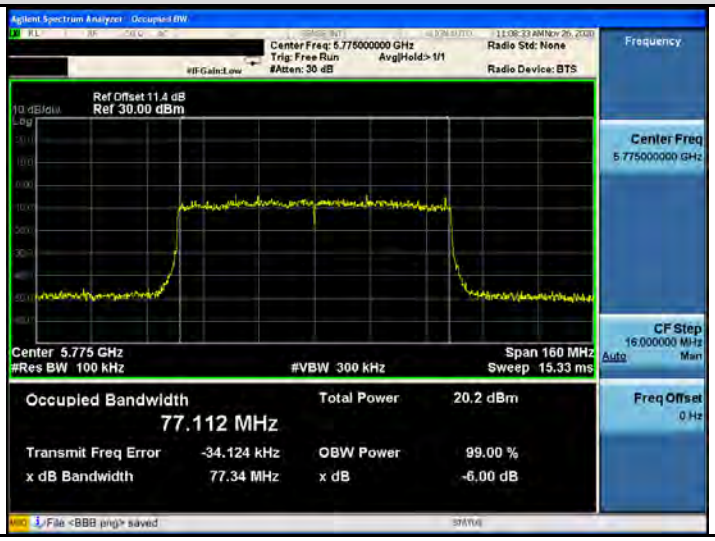
Mode 18: IEEE 802.11ax 80 MHz Continuous TX Mode_ANT-1		
5775 MHz		

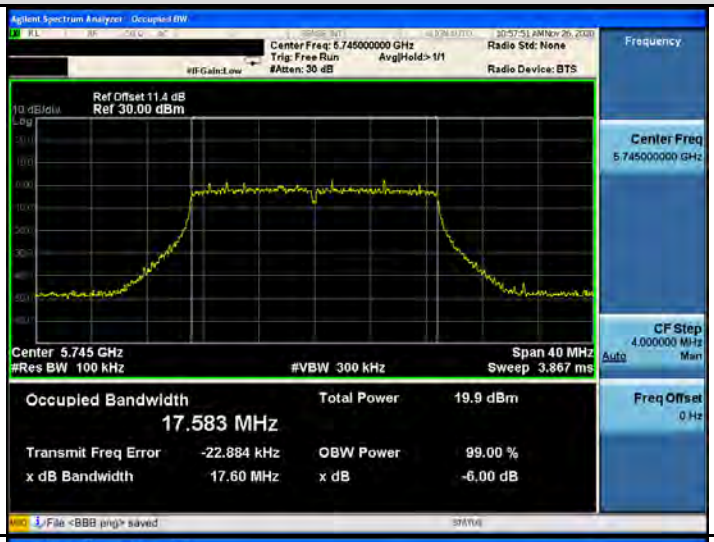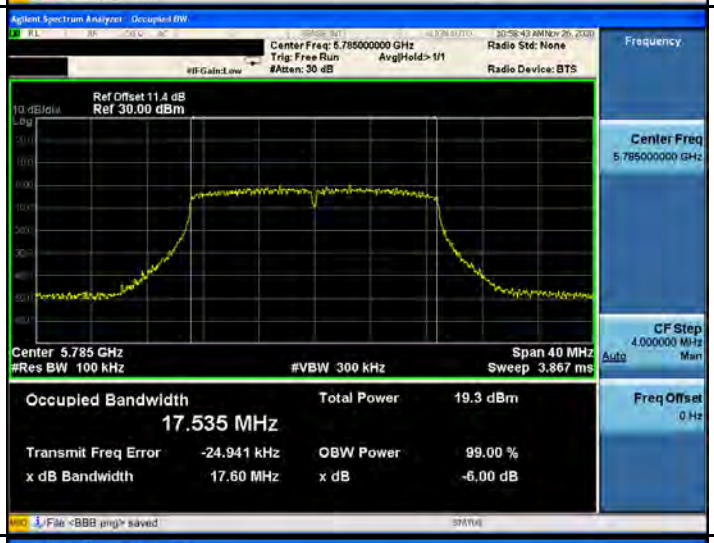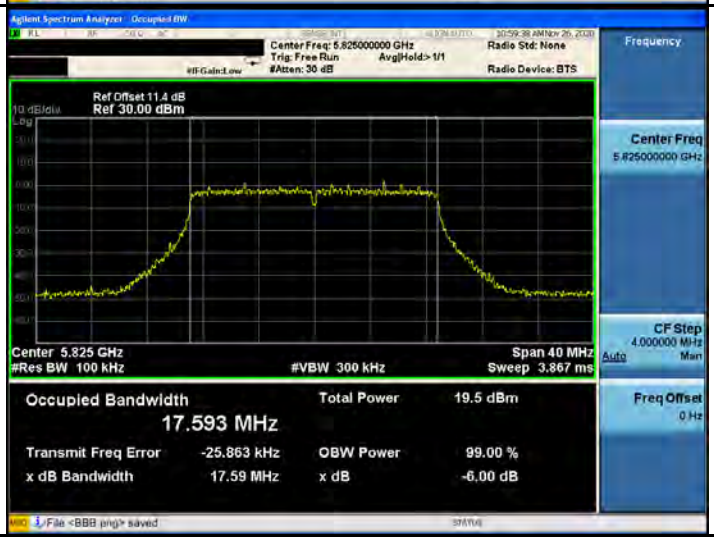Mode 13: IEEE 802.11ac 20 MHz Continuous TX Mode_ANT-2		
5745 MHz		
5785 MHz		
5825 MHz		

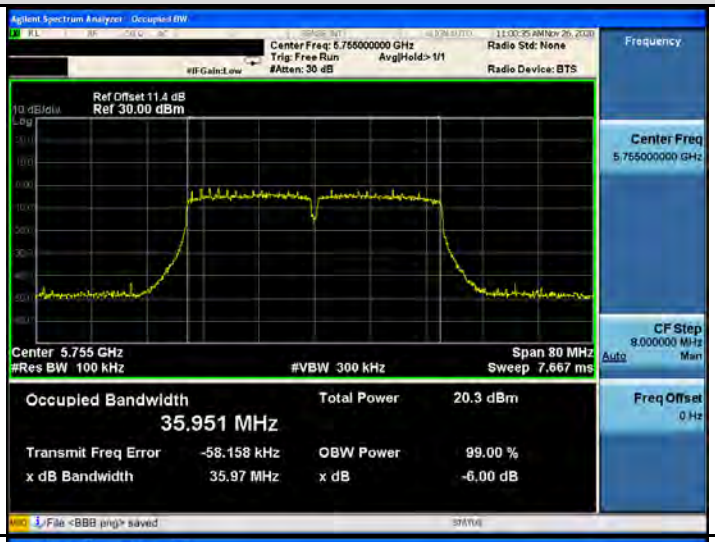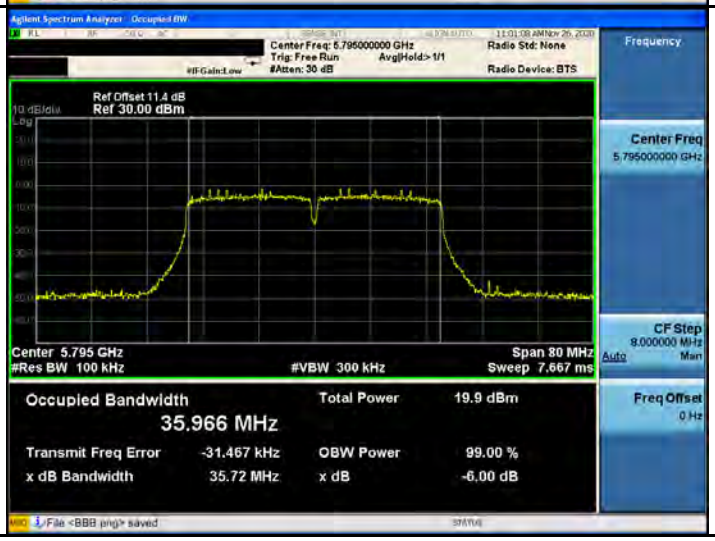
Mode 14: IEEE 802.11ac 40 MHz Continuous TX Mode_ANT-2		
5755 MHz		
5795 MHz		

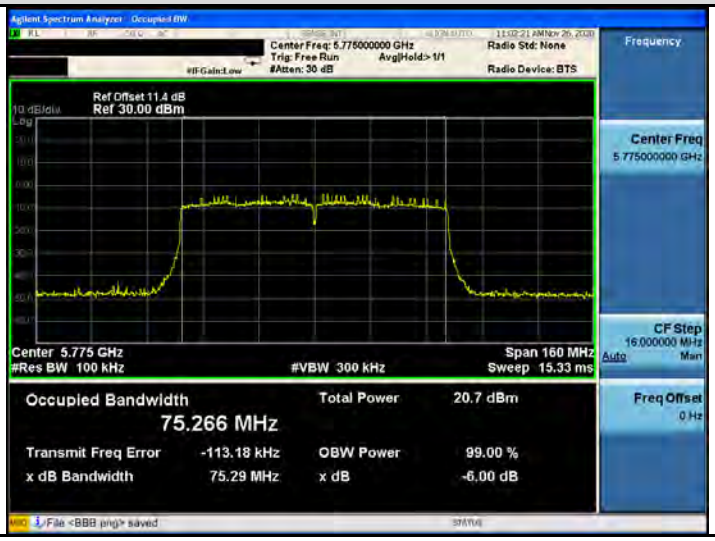
Mode 15: IEEE 802.11ac 80 MHz Continuous TX Mode_ANT-2		
5775 MHz		

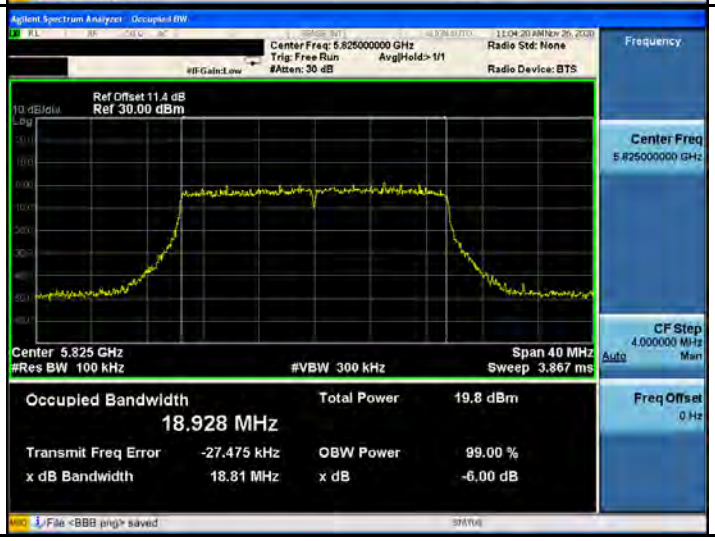
Mode 16: IEEE 802.11ax 20 MHz Continuous TX Mode_ANT-2		
5745 MHz		
5785 MHz		
5825 MHz		

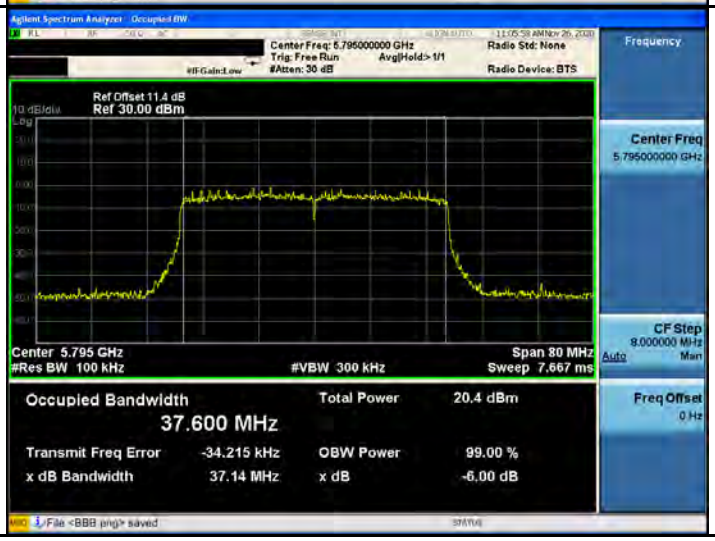Mode 17: IEEE 802.11ax 40 MHz Continuous TX Mode_ANT-2		
5755 MHz		
5795 MHz		


Mode 18: IEEE 802.11ax 80 MHz Continuous TX Mode_ANT-2		
5775 MHz		

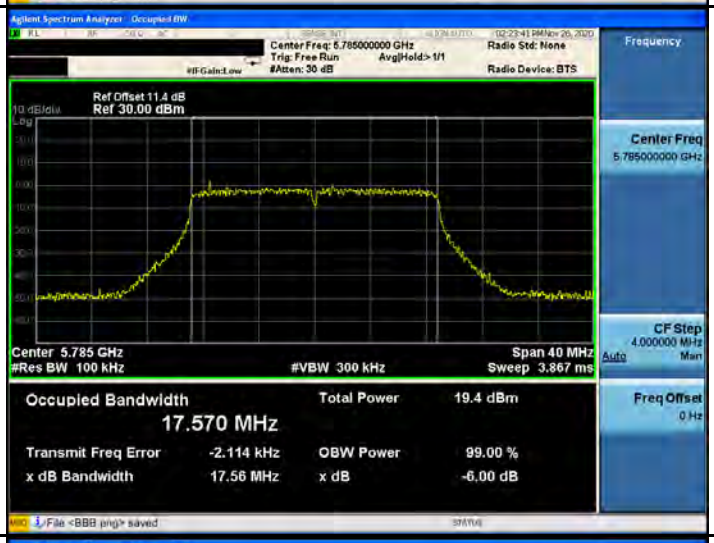
Mode 13: IEEE 802.11ac 20 MHz Continuous TX Mode_ANT-3		
5745 MHz		
5785 MHz		
5825 MHz		

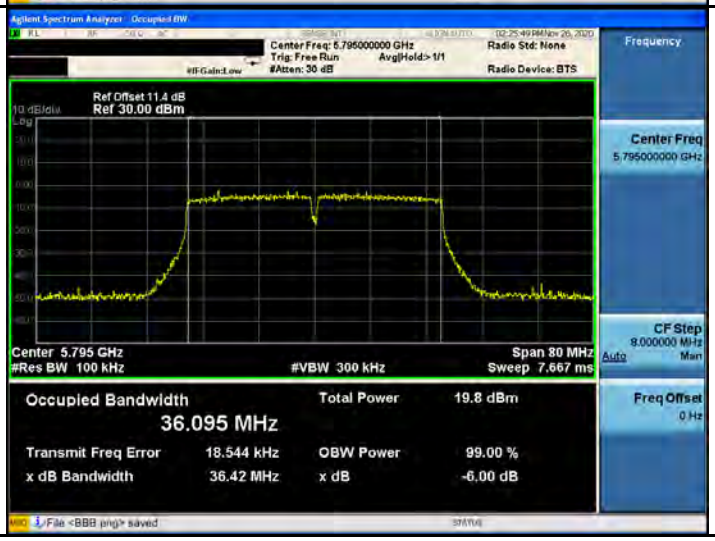Mode 14: IEEE 802.11ac 40 MHz Continuous TX Mode_ANT-3		
5755 MHz		
5795 MHz		

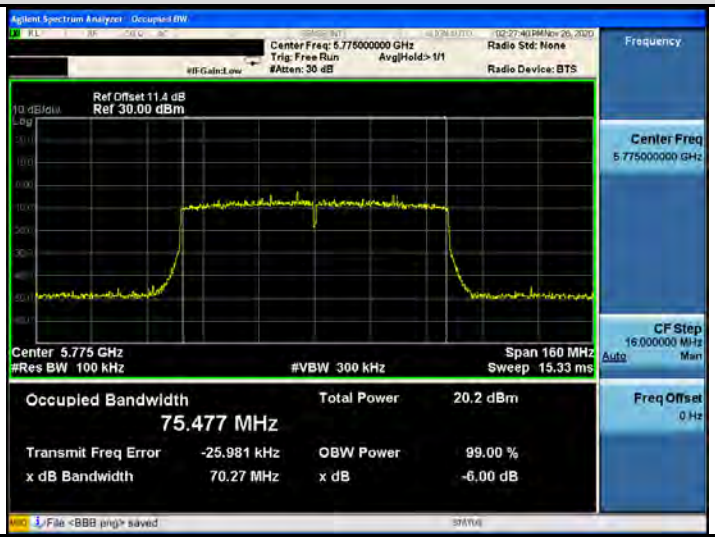Mode 15: IEEE 802.11ac 80 MHz Continuous TX Mode_ANT-3		
5775 MHz		

Mode 16: IEEE 802.11ax 20 MHz Continuous TX Mode_ANT-3		
5745 MHz		
5785 MHz		
5825 MHz		

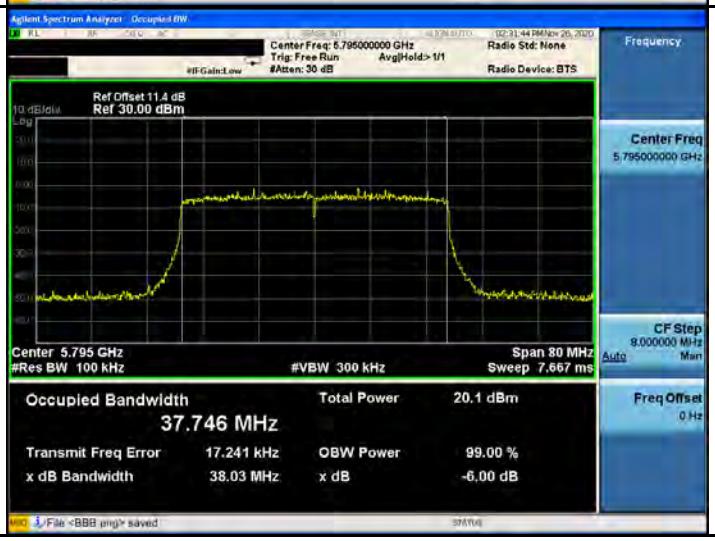Mode 17: IEEE 802.11ax 40 MHz Continuous TX Mode_ANT-3		
5755 MHz		
5795 MHz		

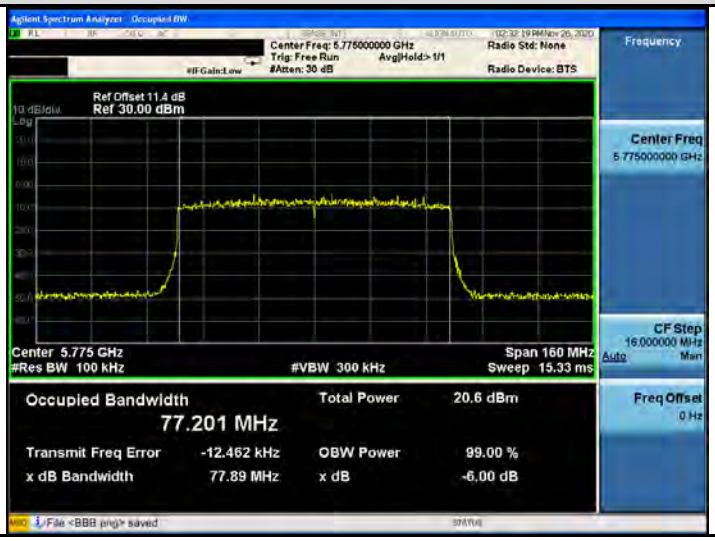Mode 18: IEEE 802.11ax 80 MHz Continuous TX Mode_ANT-3		
5775 MHz		

發射功率控制(TPC)

測試結果	：	Mode 10: EIRP = 164.437 mW < 500 mW ，故不需評估發射功率控制(TPC)。
		Mode 11: EIRP = 530.130 mW > 500 mW ，故需評估發射功率控制(TPC)。
		Mode 12: EIRP = 698.322 mW > 500 mW ，故需評估發射功率控制(TPC)。
		Mode 13: EIRP = 534.826 mW > 500 mW ，故需評估發射功率控制(TPC)。
		Mode 14: EIRP = 710.873 mW > 500 mW ，故需評估發射功率控制(TPC)。
		Mode 15: EIRP = 511.831 mW > 500 mW ，故需評估發射功率控制(TPC)。
		Mode 16: EIRP = 554.649 mW > 500 mW ，故需評估發射功率控制(TPC)。
		Mode 17: EIRP = 718.333 mW > 500 mW ，故需評估發射功率控制(TPC)。
		Mode 18: EIRP = 542.257 mW > 500 mW ，故需評估發射功率控制(TPC)。

Beamforming on

測試結果	：	Mode 11: EIRP = 473.151 mW < 500 mW ，故不需評估發射功率控制(TPC)。
		Mode 12: EIRP = 651.628 mW > 500 mW ，故需評估發射功率控制(TPC)。
		Mode 13: EIRP = 481.948 mW < 500 mW ，故不需評估發射功率控制(TPC)。
		Mode 14: EIRP = 659.174 mW > 500 mW ，故需評估發射功率控制(TPC)。
		Mode 15: EIRP = 477.529 mW < 500 mW ，故不需評估發射功率控制(TPC)。
		Mode 16: EIRP = 522.396 mW > 500 mW ，故需評估發射功率控制(TPC)。
		Mode 17: EIRP = 676.083 mW > 500 mW ，故需評估發射功率控制(TPC)。
		Mode 18: EIRP = 510.505 mW > 500 mW ，故需評估發射功率控制(TPC)。

Transmit power control Measurement

Test Mode	Data Rate	Frequency (MHz)	ANT-0+1+2+3				Limit (dBm)
			Max. Outup Power	Max. Gain	E.I.R.P.		
			(dBm)	(dBi)	(dBm)	(W)	
Mode 11	26M	5260.0	19.28	4.64	23.92	0.247	≤ 24
		5280.0	19.02	4.64	23.66	0.232	≤ 24
		5300.0	18.88	4.64	23.52	0.225	≤ 24
		5320.0	19.05	4.64	23.69	0.234	≤ 24
		5500.0	18.68	4.78	23.46	0.222	≤ 24
		5520.0	18.56	4.78	23.34	0.216	≤ 24
		5540.0	18.58	4.78	23.36	0.217	≤ 24
		5560.0	18.70	4.78	23.48	0.223	≤ 24
		5580.0	18.63	4.78	23.41	0.219	≤ 24
		5660.0	18.51	4.78	23.29	0.213	≤ 24
		5680.0	18.52	4.78	23.30	0.214	≤ 24
		5700.0	18.57	4.78	23.35	0.216	≤ 24
Mode 12	54M	5270.0	18.67	4.64	23.31	0.214	≤ 24
		5310.0	18.90	4.64	23.54	0.226	≤ 24
		5510.0	18.78	4.78	23.56	0.227	≤ 24
		5550.0	18.63	4.78	23.41	0.219	≤ 24
		5670.0	18.80	4.78	23.58	0.228	≤ 24
Mode 13	26M	5260.0	19.31	4.64	23.95	0.248	≤ 24
		5280.0	19.09	4.64	23.73	0.236	≤ 24
		5300.0	18.95	4.64	23.59	0.229	≤ 24
		5320.0	19.17	4.64	23.81	0.240	≤ 24
		5500.0	18.71	4.78	23.49	0.223	≤ 24
		5520.0	18.63	4.78	23.41	0.219	≤ 24
		5540.0	18.64	4.78	23.42	0.220	≤ 24
		5560.0	18.78	4.78	23.56	0.227	≤ 24
		5580.0	18.72	4.78	23.50	0.224	≤ 24
		5660.0	18.61	4.78	23.39	0.218	≤ 24
		5680.0	18.62	4.78	23.40	0.219	≤ 24
		5700.0	18.64	4.78	23.42	0.220	≤ 24

Note: The relevant measured result has the offset with cable loss already.

Test Mode	Data Rate	Frequency (MHz)	ANT-0+1+2+3				Limit (dBm)
			Max. Outup Power	Max. Gain	E.I.R.P.		
			(dBm)	(dBi)	(dBm)	(W)	
Mode 14	54M	5270.0	18.75	4.64	23.39	0.218	≤ 24
		5310.0	18.98	4.64	23.62	0.230	≤ 24
		5510.0	18.81	4.78	23.59	0.229	≤ 24
		5550.0	18.72	4.78	23.50	0.224	≤ 24
		5670.0	18.89	4.78	23.67	0.233	≤ 24
Mode 15	117.2M	5290.0	18.96	4.64	23.60	0.229	≤ 24
		5530.0	18.78	4.78	23.56	0.227	≤ 24
Mode 16	MCS 0	5260.0	18.96	4.64	23.60	0.229	≤ 24
		5280.0	18.75	4.64	23.39	0.218	≤ 24
		5300.0	18.59	4.64	23.23	0.210	≤ 24
		5320.0	18.31	4.64	22.95	0.197	≤ 24
		5500.0	18.94	4.78	23.72	0.236	≤ 24
		5520.0	18.54	4.78	23.32	0.215	≤ 24
		5540.0	18.58	4.78	23.36	0.217	≤ 24
		5560.0	18.69	4.78	23.47	0.222	≤ 24
		5580.0	18.60	4.78	23.38	0.218	≤ 24
		5660.0	18.42	4.78	23.20	0.209	≤ 24
		5680.0	18.31	4.78	23.09	0.204	≤ 24
		5700.0	18.50	4.78	23.28	0.213	≤ 24
Mode 17	MCS 0	5270.0	18.85	4.64	23.49	0.223	≤ 24
		5310.0	18.99	4.64	23.63	0.231	≤ 24
		5510.0	19.00	4.78	23.78	0.239	≤ 24
		5550.0	18.73	4.78	23.51	0.224	≤ 24
		5670.0	18.52	4.78	23.30	0.214	≤ 24
Mode 18	MCS 0	5290.0	18.65	4.64	23.29	0.213	≤ 24
		5530.0	18.49	4.78	23.27	0.212	≤ 24



Note: The relevant measured result has the offset with cable loss already.



Beamforming on



Test Mode	Data Rate	Frequency (MHz)	ANT-0+1+2+3				Limit (dBm)
			Max. Outup Power	Max. Gain	E.I.R.P.		
			(dBm)	(dBi)	(dBm)	(W)	
Mode 12	54M	5270.0	12.93	10.65	23.58	0.228	≤ 24
		5310.0	13.00	10.65	23.65	0.232	≤ 24
		5510.0	12.81	10.79	23.60	0.229	≤ 24
		5550.0	12.71	10.79	23.50	0.224	≤ 24
		5670.0	12.95	10.79	23.74	0.236	≤ 24
Mode 14	54M	5270.0	12.99	10.65	23.64	0.231	≤ 24
		5310.0	13.08	10.65	23.73	0.236	≤ 24
		5510.0	12.88	10.79	23.67	0.233	≤ 24
		5550.0	12.83	10.79	23.62	0.230	≤ 24
		5670.0	13.01	10.79	23.80	0.240	≤ 24
Mode 16	MCS 0	5260.0	13.17	10.65	23.82	0.241	≤ 24
		5280.0	12.92	10.65	23.57	0.228	≤ 24
		5300.0	12.62	10.65	23.27	0.212	≤ 24
		5320.0	12.86	10.65	23.51	0.224	≤ 24
		5500.0	13.01	10.79	23.80	0.240	≤ 24
		5520.0	12.93	10.79	23.72	0.236	≤ 24
		5540.0	12.89	10.79	23.68	0.233	≤ 24
		5560.0	13.05	10.79	23.84	0.242	≤ 24
		5580.0	12.95	10.79	23.74	0.237	≤ 24
		5660.0	12.72	10.79	23.51	0.224	≤ 24
		5680.0	12.72	10.79	23.51	0.224	≤ 24
		5700.0	12.83	10.79	23.62	0.230	≤ 24
Mode 17	MCS 0	5270.0	13.07	10.65	23.72	0.236	≤ 24
		5310.0	13.16	10.65	23.81	0.240	≤ 24
		5510.0	12.77	10.79	23.56	0.227	≤ 24
		5550.0	13.05	10.79	23.84	0.242	≤ 24
		5670.0	12.73	10.79	23.52	0.225	≤ 24
Mode 18	MCS 0	5290.0	12.95	10.65	23.60	0.229	≤ 24
		5530.0	12.67	10.79	23.46	0.222	≤ 24



Note: The relevant measured result has the offset with cable loss already.

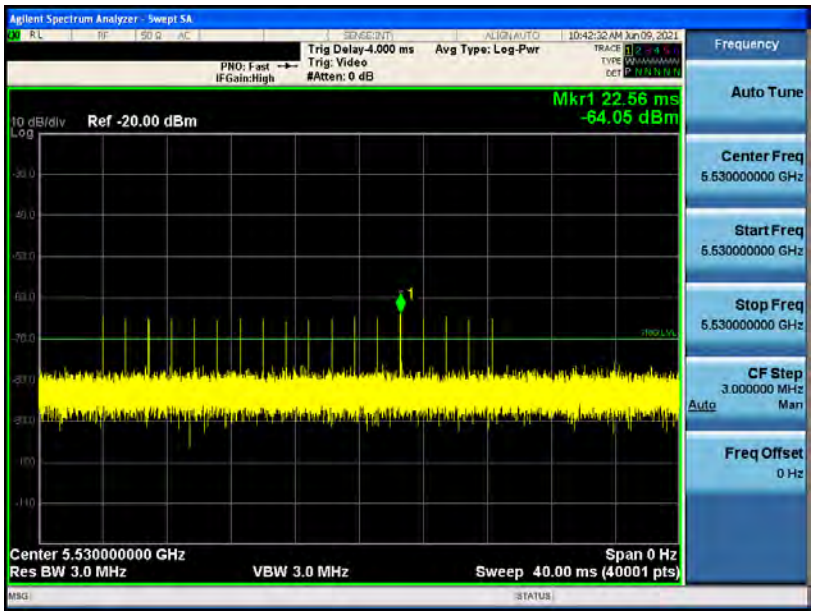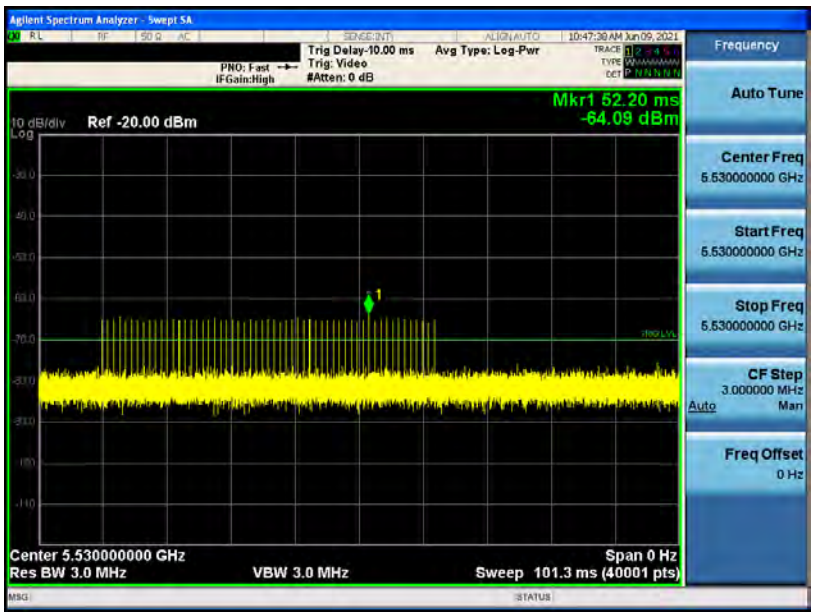
動態頻率選擇(DFS)

Mode 18: IEEE 802.11ax 80 MHz Continuous TX Mode_ 5530 MHz	
Short Pulse Radar Type 0	
Short Pulse Radar Type 1A	

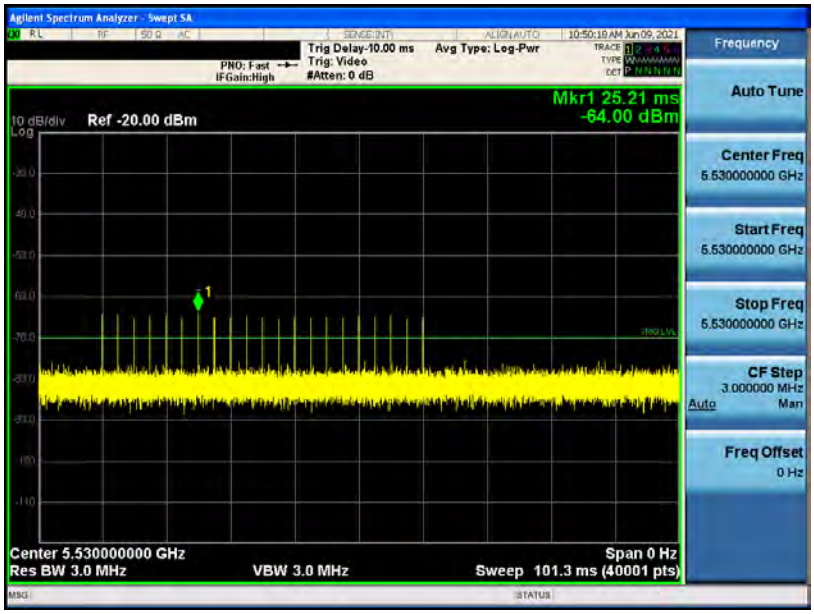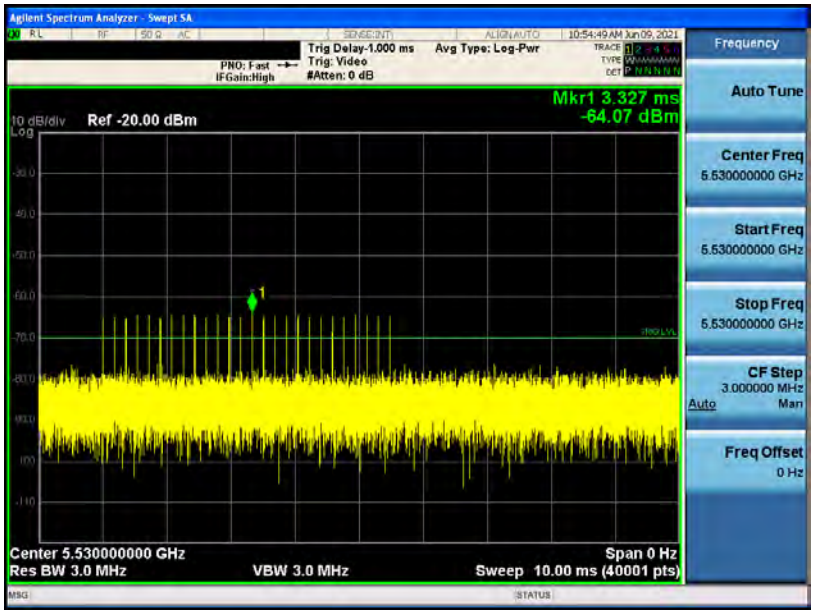Mode 18: IEEE 802.11ax 80 MHz Continuous TX Mode_ 5530 MHz	
Short Pulse Radar Type 1B	
Short Pulse Radar Type 2	

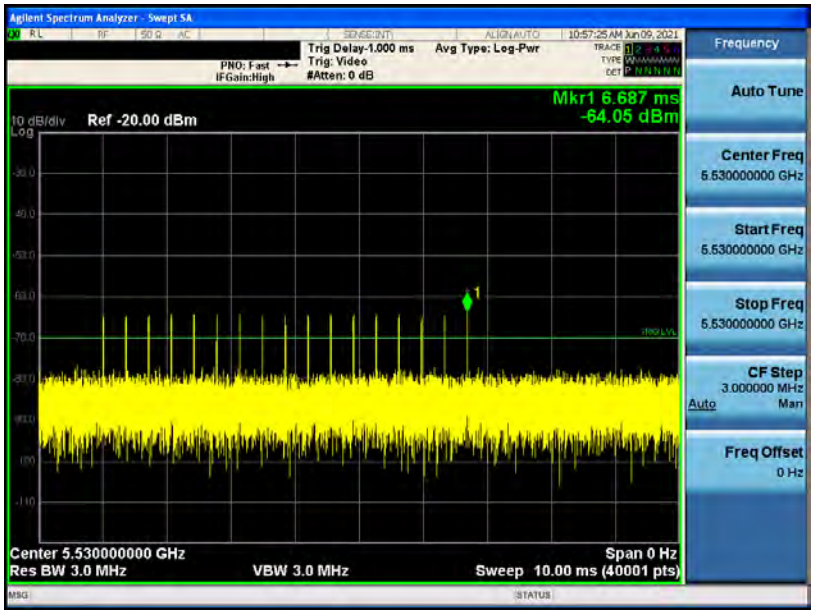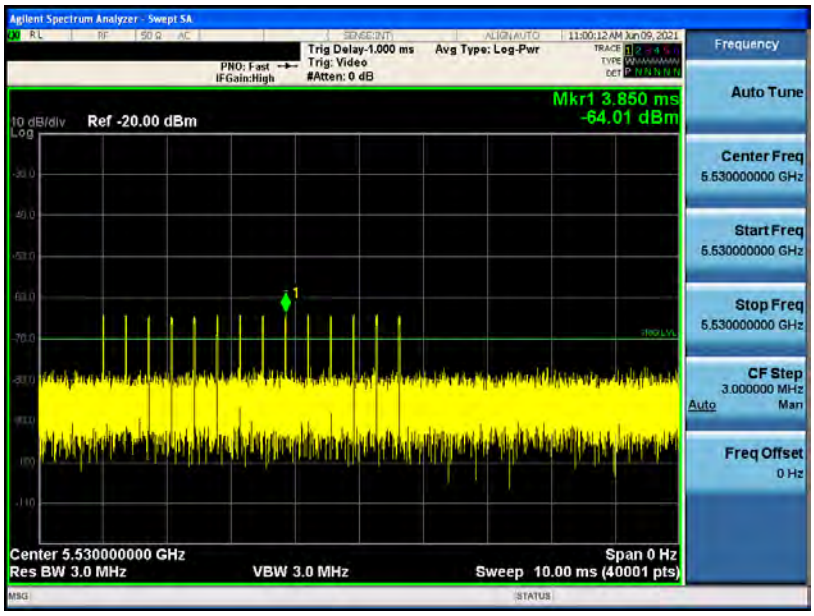Mode 18: IEEE 802.11ax 80 MHz Continuous TX Mode_ 5530 MHz	
Short Pulse Radar Type 3	
Short Pulse Radar Type 4	

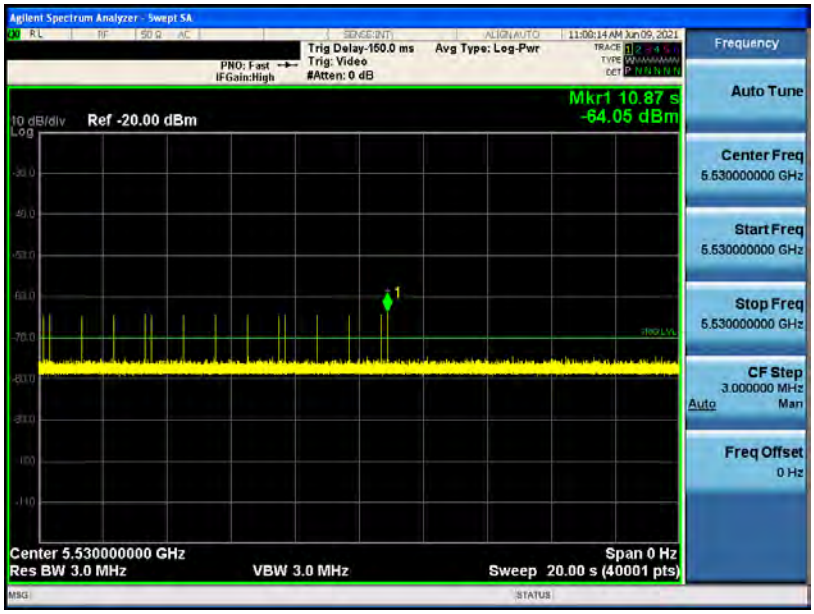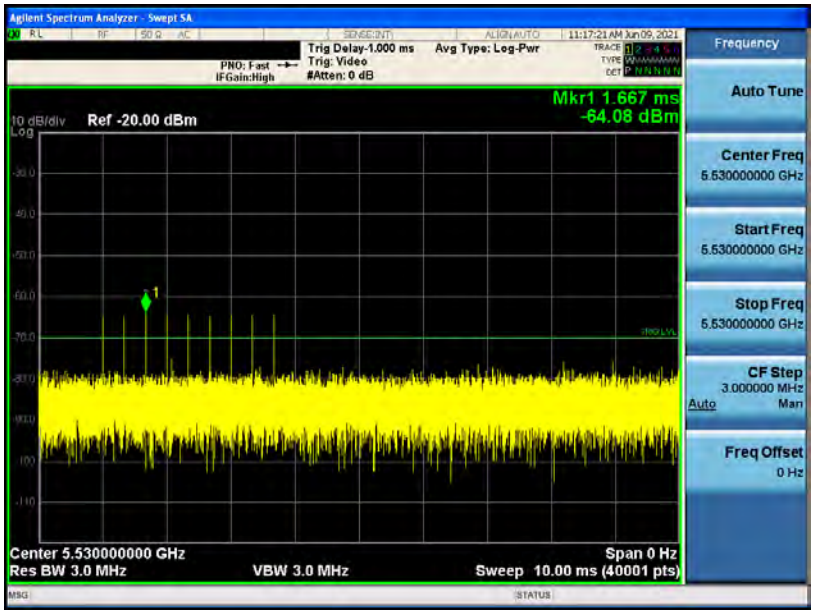Mode 18: IEEE 802.11ax 80 MHz Continuous TX Mode_ 5530 MHz	
Long Pulse Radar Type 5	
Frequency Hopping Radar Type 6	

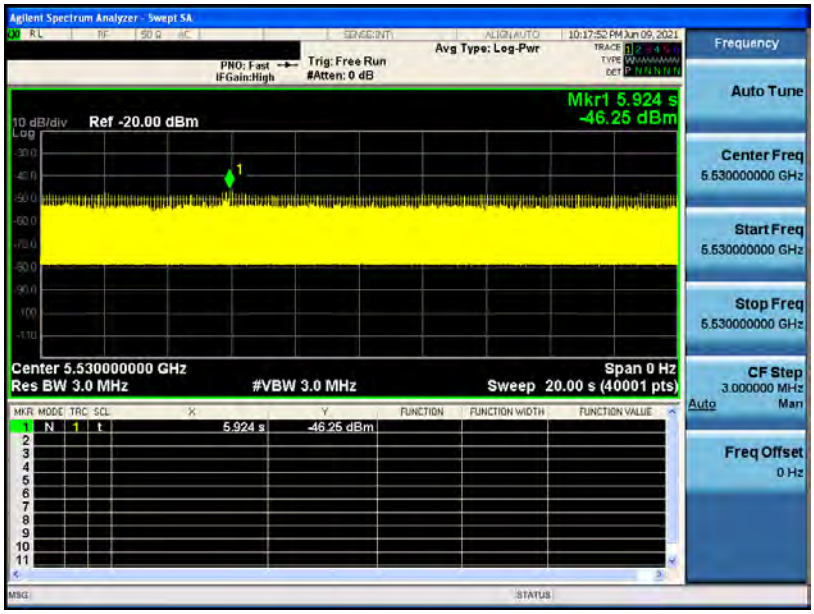Mode 18: IEEE 802.11ax 80 MHz Continuous TX Mode_ 5530 MHz	
Traffic	


頻道可用性檢查時間


Mode 16: IEEE 802.11ax 20 MHz Continuous TX Mode_ 5560 MHz

No Radar Triggered					
Frequency (MHz)	Timing of Reboot (sec)	Delta (sec)	Timing of Start of Traffic (sec)	Total Power-up Cycle Time (sec)	Initial Power-up Cycle Time (sec)
5560	6.585	123.400	129.985	123.400	63.400

Radar Near Beginning of CAC				
Frequency (MHz)	Timing of Reboot (sec)	Timing of Radar Burst (sec)	Radar Relative to Reboot (sec)	Radar Relative to Start of CAC (sec)
5560	6.585	71.160	64.575	1.175

Radar Near End of CAC				
Frequency (MHz)	Timing of Reboot (sec)	Timing of Radar Burst (sec)	Radar Relative to Reboot (sec)	Radar Relative to Start of CAC (sec)
5560	6.585	125.100	118.515	55.115

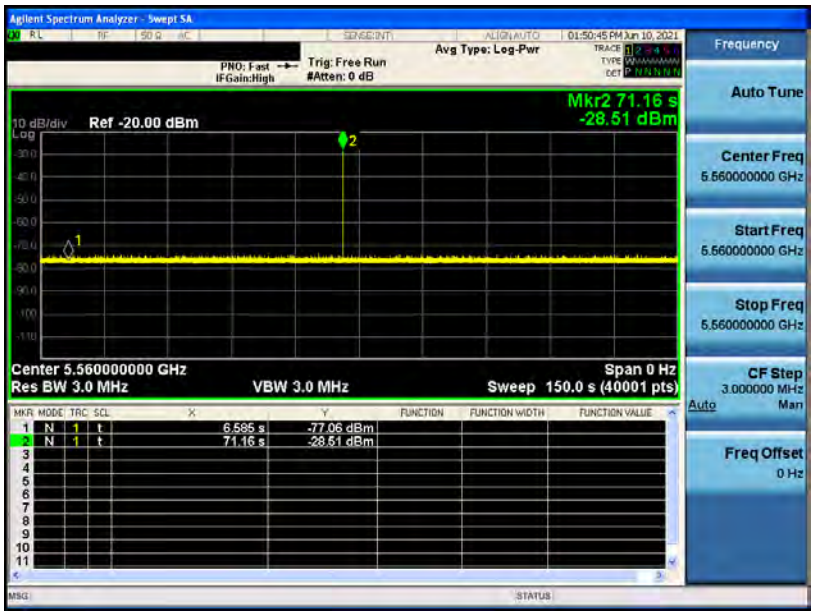
Mode 16: IEEE 802.11ax 20 MHz Continuous TX Mode_ 5560 MHz	
Initial Channel Availability Check	
Initial Channel Availability Check Begin	

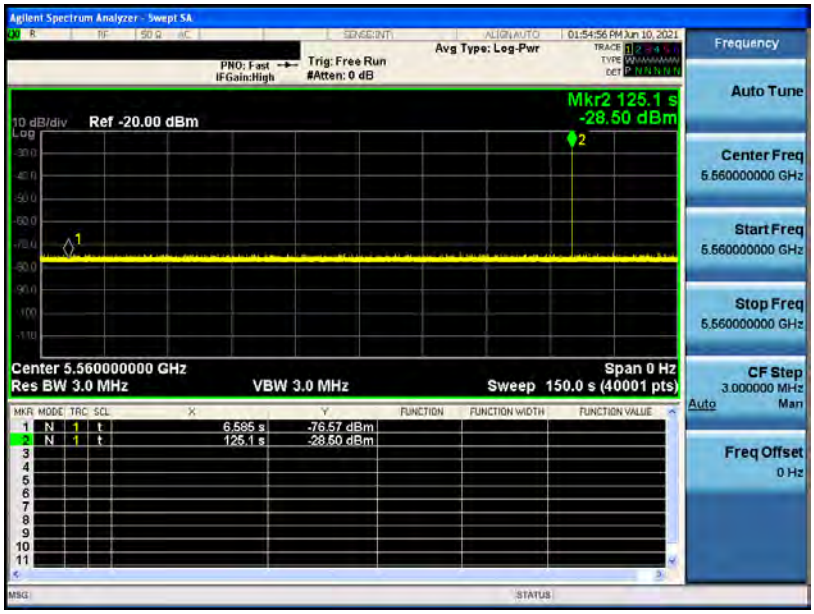Mode 16: IEEE 802.11ax 20 MHz Continuous TX Mode_ 5560 MHz	
Initial Channel Availability Check End	


頻道移動時間

操作模式	Frequency (MHz)	Radar Type	Channel Move Time (sec)	Limit (sec)
Mode 18	5530	Type 0	0.431	10

操作模式	Frequency (MHz)	Radar Type	Aggregate Channel Closing Transmission Time (msec)	Limit (msec)
Mode 18	5530	Type 0	6.9998	200

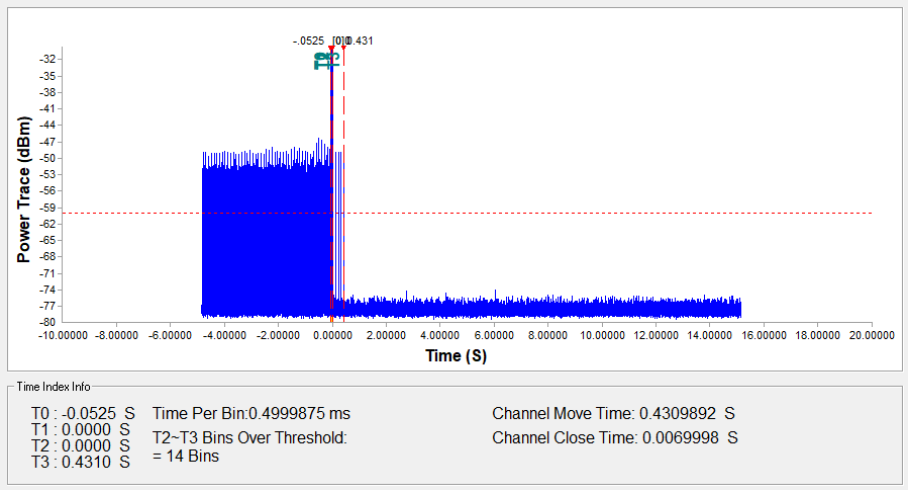Mode 18: IEEE 802.11ax 80 MHz Continuous TX Mode	
Channel Move Time / Channel Closing Transmission Time	

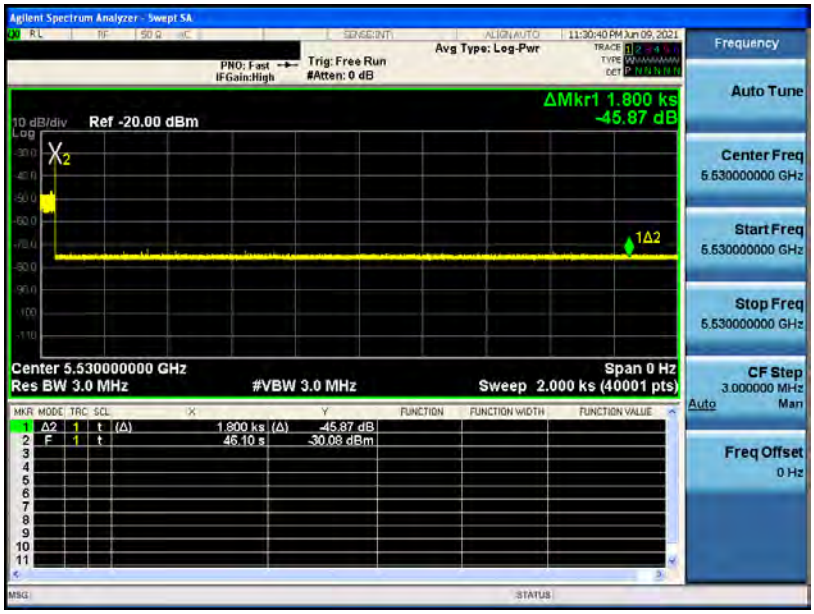不可佔用時間

Mode 18: IEEE 802.11ax 80 MHz Continuous TX Mode	
Non-Occupancy Period	

偵測頻寬

Test Mode	Mode 16: IEEE 802.11ax 20 MHz Continuous TX Mode					
Frequency (MHz)	FL (MHz)	FH (MHz)	Detection Bandwidth (MHz)	99 % Power Bandwidth (MHz)	Ratio of Detection BW to 99 % Power BW (%)	Minimum Limit (%)
5560	5550	5570	20	19.128	104.56	≧100

Test Mode	Mode 17: IEEE 802.11ax 40 MHz Continuous TX Mode					
Frequency (MHz)	FL (MHz)	FH (MHz)	Detection Bandwidth (MHz)	99 % Power Bandwidth (MHz)	Ratio of Detection BW to 99 % Power BW (%)	Minimum Limit (%)
5550	5530	5570	40	37.452	106.80	≧100

Test Mode	Mode 18: IEEE 802.11ax 80 MHz Continuous TX Mode					
Frequency (MHz)	FL (MHz)	FH (MHz)	Detection Bandwidth (MHz)	99 % Power Bandwidth (MHz)	Ratio of Detection BW to 99 % Power BW (%)	Minimum Limit (%)
5530	5490	5570	80	76.082	105.15	≧100

Mode 16: IEEE 802.11ax 20 MHz Continuous TX Mode



Mode 17: IEEE 802.11ax 40 MHz Continuous TX Mode



Mode 18: IEEE 802.11ax 80 MHz Continuous TX Mode



偵測機率

Test Mode	Mode 16: IEEE 802.11ax 20 MHz Continuous TX Mode						
Frequency (MHz)	Radar Signal	PRI (Msec)	Pulse width W (μs)	Pass Times	Fail Times	Probability	Limit
5530	Type1	Table 5a	1	28	2	93.33%	≧60 %
	Type2	Random	Random	28	2	93.33%	≧60 %
	Type3	Random	Random	25	5	83.33%	≧60 %
	Type4	Random	Random	26	4	86.67%	≧60 %
	Type1~4					89.17%	≧80 %
	Type5	Random	Random	30	0	100.00%	≧80 %
	Type6	Hopping	1	27	3	90.00%	≧70 %

Test Mode	Mode 17: IEEE 802.11ax 40 MHz Continuous TX Mode						
Frequency (MHz)	Radar Signal	PRI (Msec)	Pulse width W (μs)	Pass Times	Fail Times	Probability	Limit
5530	Type1	Table 5a	1	29	1	96.67%	≧60 %
	Type2	Random	Random	30	0	100.00%	≧60 %
	Type3	Random	Random	29	1	96.67%	≧60 %
	Type4	Random	Random	27	3	90.00%	≧60 %
	Type1~4					95.83%	≧80 %
	Type5	Random	Random	30	0	100.00%	≧80 %
	Type6	Hopping	1	30	0	100.00%	≧70 %

Test Mode	Mode 18: IEEE 802.11ax 80 MHz Continuous TX Mode						
Frequency (MHz)	Radar Signal	PRI (Msec)	Pulse width W (μs)	Pass Times	Fail Times	Probability	Limit
5530	Type1	Table 5a	1	29	1	96.67%	≧60 %
	Type2	Random	Random	29	1	96.67%	≧60 %
	Type3	Random	Random	27	3	90.00%	≧60 %
	Type4	Random	Random	24	6	80.00%	≧60 %
	Type1~4					90.83%	≧80 %
	Type5	Random	Random	29	1	96.67%	≧80 %
	Type6	Hopping	1	30	0	100.00%	≧70 %

電波暴露量之評估

Band	Frequency (MHz)	Limit (mW/cm^2)	Distance [R] (cm)	Power [P] (dBm)	ANT Gain (dBi)	Numeric Gain [G] (dBi)	Duty Cycle	With Duty cycle [P] x [G] (mW)	Power Density [S] (mW/cm^2)
WLAN 2.4 GHz	2412~2462	1	20	25.25	4.25	2.66	1	892.033	0.1775
WLAN 5 GHz	5180~5825	1	20	25.76	4.64	2.91	1	1095.536	0.2179

---END---