


Site: AC1	Time: 2020/04/22 - 15:51
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test: Transmit by 802.11 a at Channel 5260MHz with OAW-AP1361D (CDD Mode)	

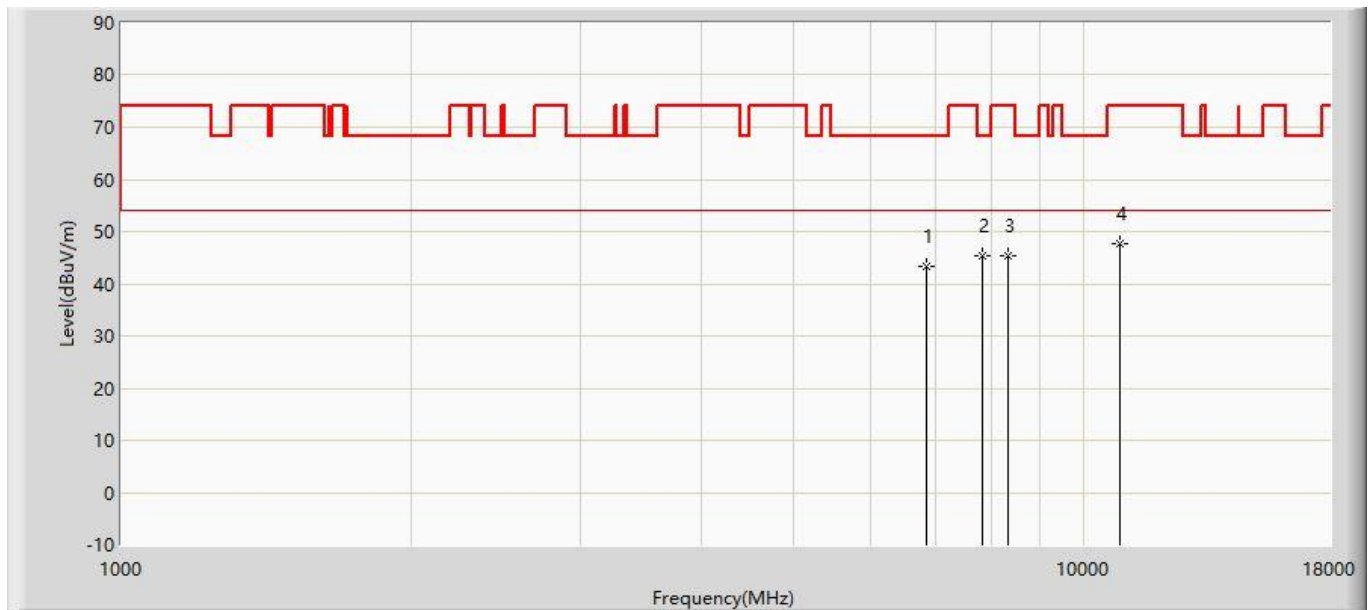


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			6856.500	43.236	33.470	-24.964	68.200	9.766	PK
2		*	7851.000	45.262	33.186	-22.938	68.200	12.076	PK
3			8344.000	45.281	32.897	-28.719	74.000	12.384	PK
4			10877.000	47.603	30.197	-26.397	74.000	17.406	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/22 - 15:52
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test: Transmit by 802.11 a at Channel 5260MHz with OAW-AP1361D (CDD Mode)	

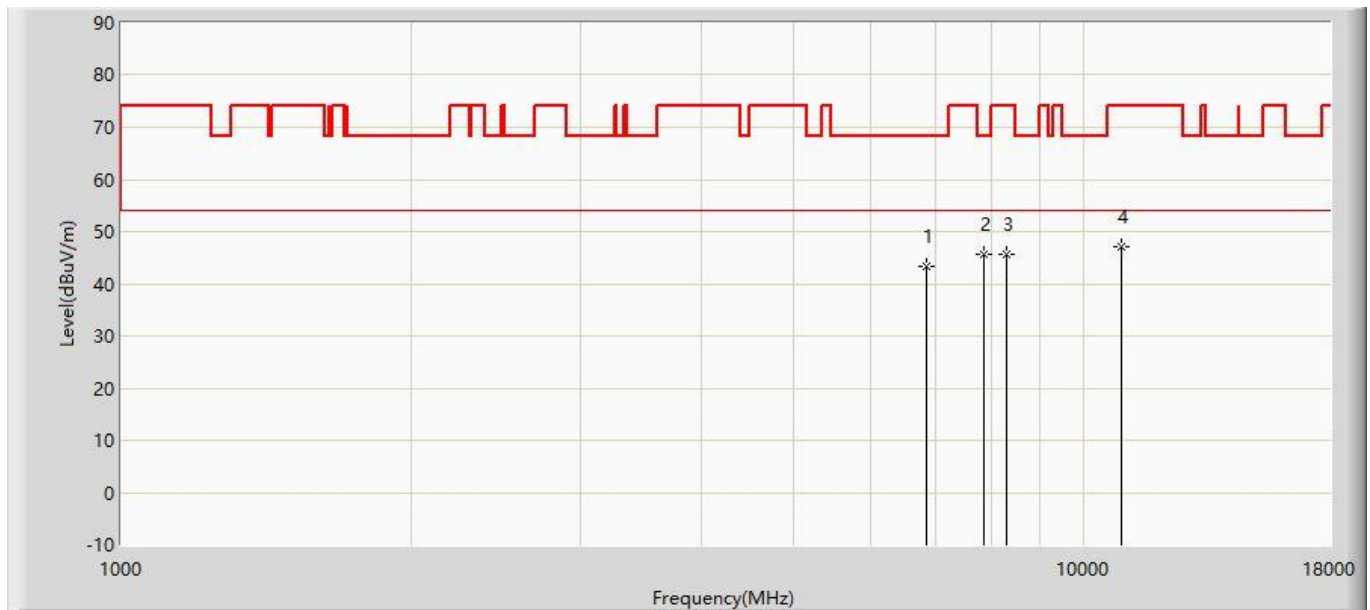


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			6856.500	43.443	33.677	-24.757	68.200	9.766	PK
2		*	7859.500	45.737	33.652	-22.463	68.200	12.086	PK
3			8293.000	45.677	33.315	-28.323	74.000	12.362	PK
4			10928.000	47.159	29.682	-26.841	74.000	17.477	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/22 - 15:53
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test: Transmit by 802.11 a at Channel 5300MHz with OAW-AP1361D (CDD Mode)	

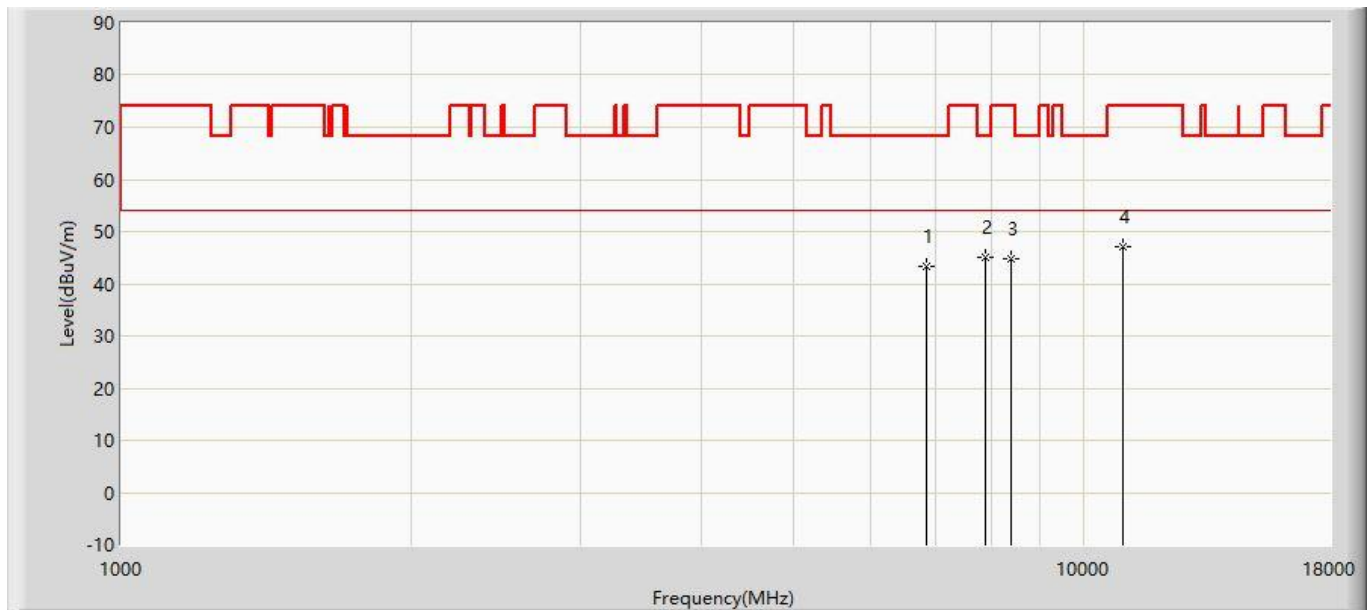


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			6865.000	43.314	33.498	-24.886	68.200	9.816	PK
2		*	7885.000	44.978	32.866	-23.222	68.200	12.112	PK
3			8403.500	44.731	32.319	-29.269	74.000	12.412	PK
4			10953.500	47.150	29.636	-26.850	74.000	17.514	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/22 - 15:53
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test: Transmit by 802.11 a at Channel 5300MHz with OAW-AP1361D (CDD Mode)	

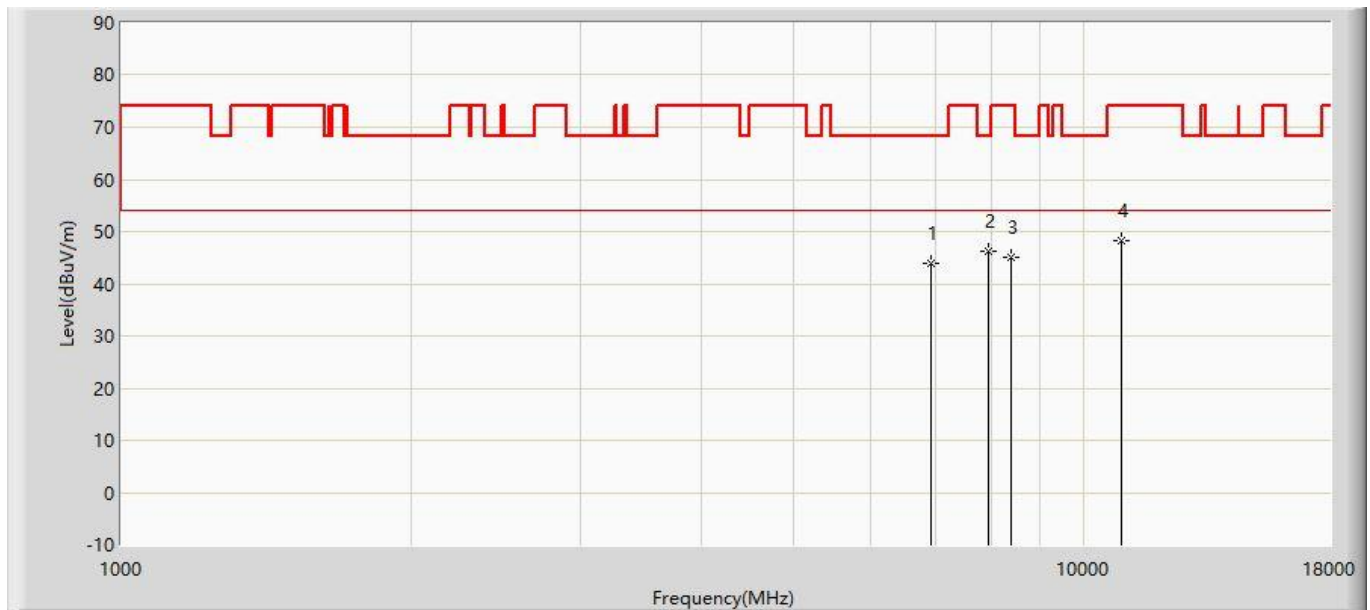

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			6924.500	43.873	33.712	-24.327	68.200	10.161	PK
2		*	7944.500	46.133	33.960	-22.067	68.200	12.172	PK
3			8412.000	45.150	32.734	-28.850	74.000	12.416	PK
4			10936.500	48.191	30.702	-25.809	74.000	17.489	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/22 - 15:58
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test: Transmit by 802.11 a at Channel 5320MHz with OAW-AP1361D (CDD Mode)	




No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			6890.500	43.725	33.761	-24.475	68.200	9.964	PK
2		*	7910.500	44.977	32.838	-23.223	68.200	12.138	PK
3			8310.000	45.823	33.454	-28.177	74.000	12.369	PK
4			11072.500	47.579	29.931	-26.421	74.000	17.648	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/22 - 15:58
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test: Transmit by 802.11 a at Channel 5320MHz with OAW-AP1361D (CDD Mode)	

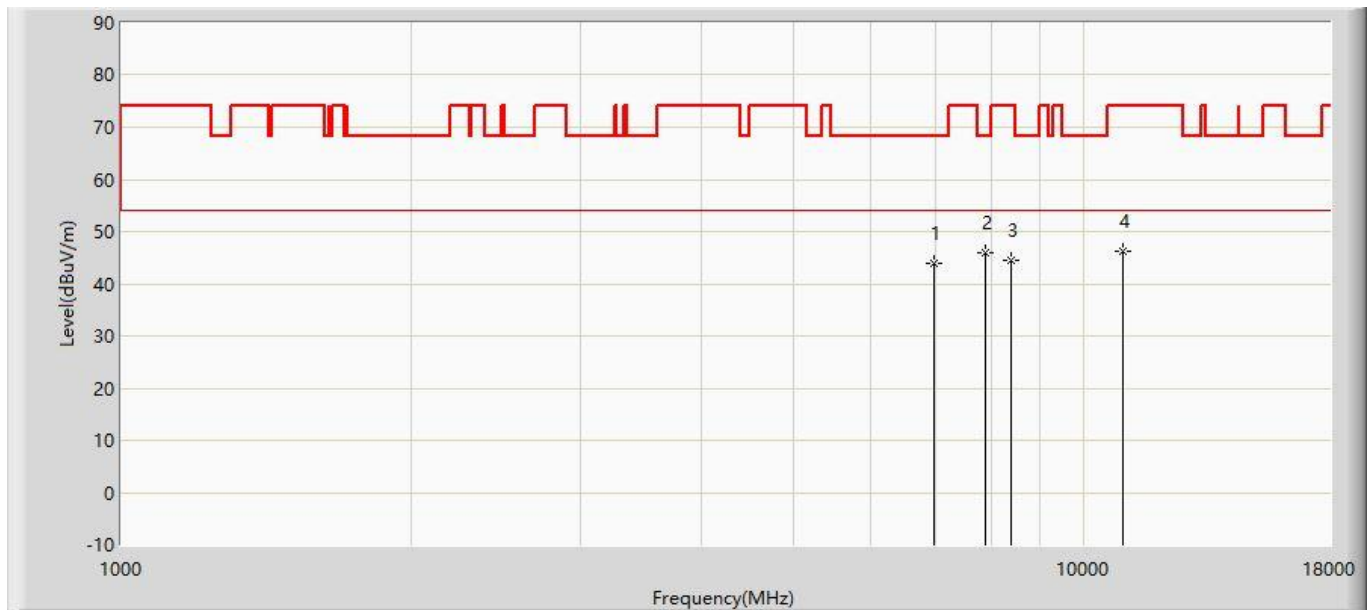


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			6975.500	43.997	33.540	-24.203	68.200	10.458	PK
2		*	7885.000	45.897	33.785	-22.303	68.200	12.112	PK
3			8395.000	44.596	32.188	-29.404	74.000	12.408	PK
4			10987.500	46.369	28.806	-27.631	74.000	17.563	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/22 - 15:59
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test: Transmit by 802.11 a at Channel 5500MHz with OAW-AP1361D (CDD Mode)	

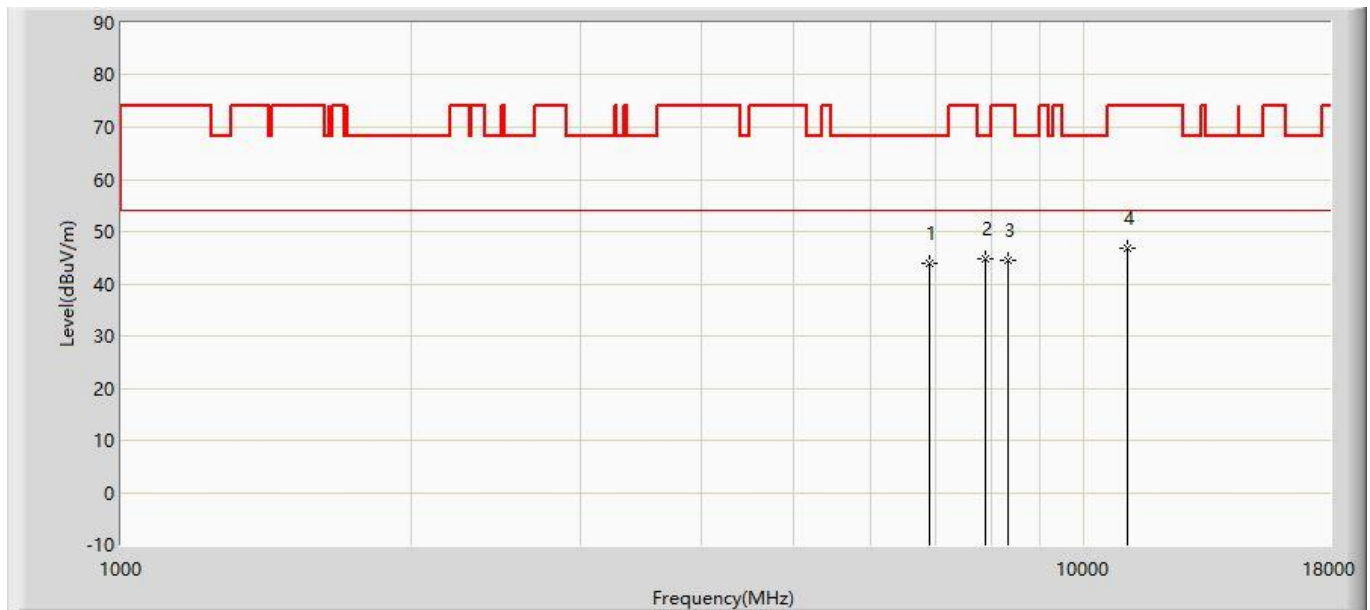

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			6916.000	43.975	33.863	-24.225	68.200	10.112	PK
2		*	7910.500	44.665	32.526	-23.535	68.200	12.138	PK
3			8327.000	44.579	32.202	-29.421	74.000	12.377	PK
4			11089.500	46.864	29.200	-27.136	74.000	17.665	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/22 - 16:00
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test: Transmit by 802.11 a at Channel 5500MHz with OAW-AP1361D (CDD Mode)	




No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			6984.000	44.547	34.040	-23.653	68.200	10.507	PK
2		*	7902.000	46.009	33.879	-22.191	68.200	12.130	PK
3			8344.000	45.942	33.558	-28.058	74.000	12.384	PK
4			11004.500	47.775	30.191	-26.225	74.000	17.584	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/22 - 16:00
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test: Transmit by 802.11 a at Channel 5600MHz with OAW-AP1361D (CDD Mode)	

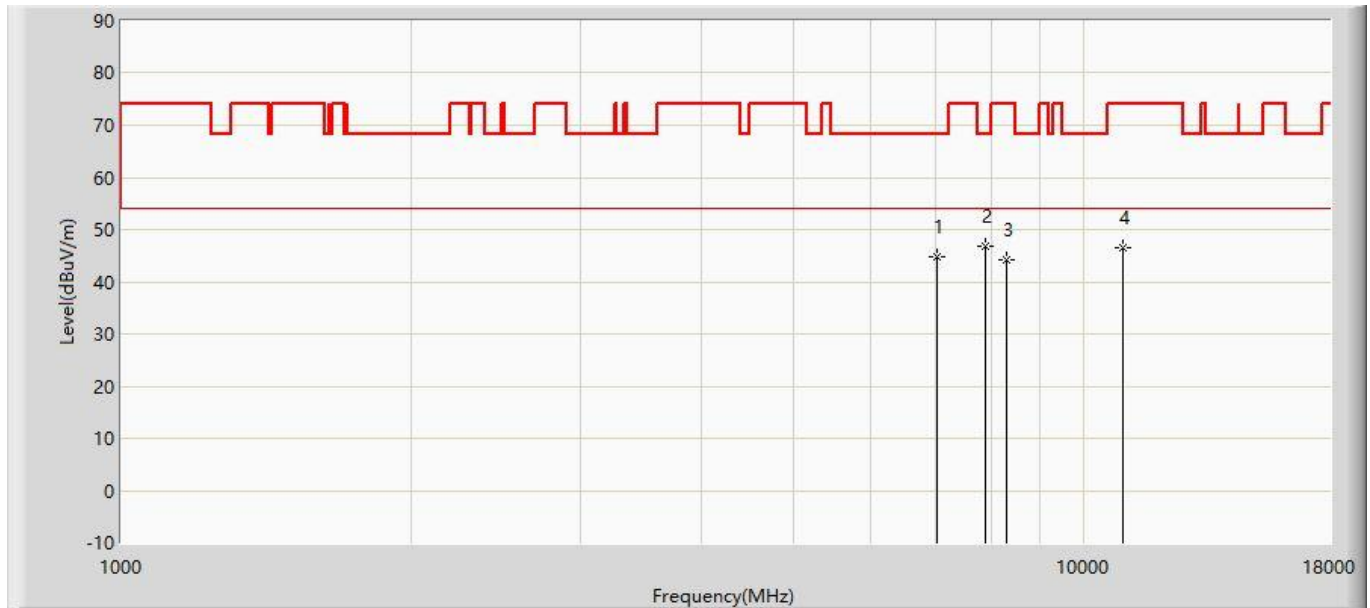


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			7026.500	44.850	34.190	-23.350	68.200	10.660	PK
2		*	7902.000	46.833	34.703	-21.367	68.200	12.130	PK
3			8310.000	44.152	31.783	-29.848	74.000	12.369	PK
4			10970.500	46.639	29.101	-27.361	74.000	17.538	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/22 - 16:01
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test: Transmit by 802.11 a at Channel 5600MHz with OAW-AP1361D (CDD Mode)	

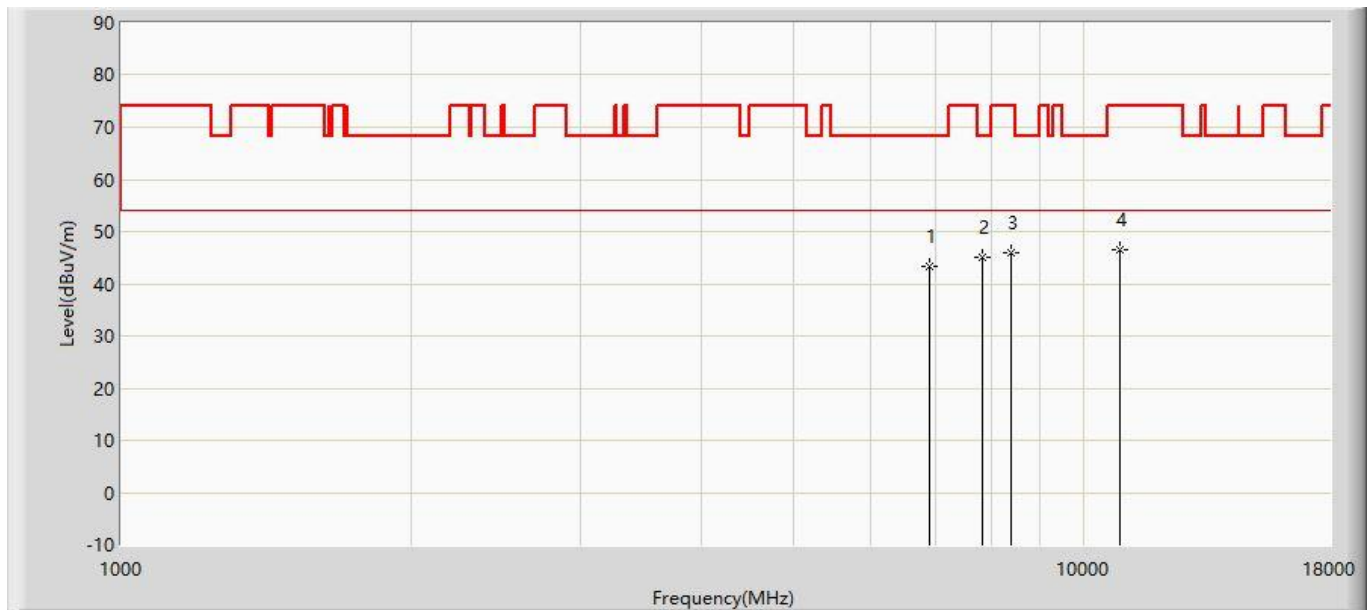


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			6899.000	43.318	33.305	-24.882	68.200	10.013	PK
2		*	7842.500	45.050	32.982	-23.150	68.200	12.067	PK
3			8412.000	45.806	33.390	-28.194	74.000	12.416	PK
4			10911.000	46.636	29.182	-27.364	74.000	17.454	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/22 - 16:01
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test: Transmit by 802.11 a at Channel 5700MHz with OAW-AP1361D (CDD Mode)	

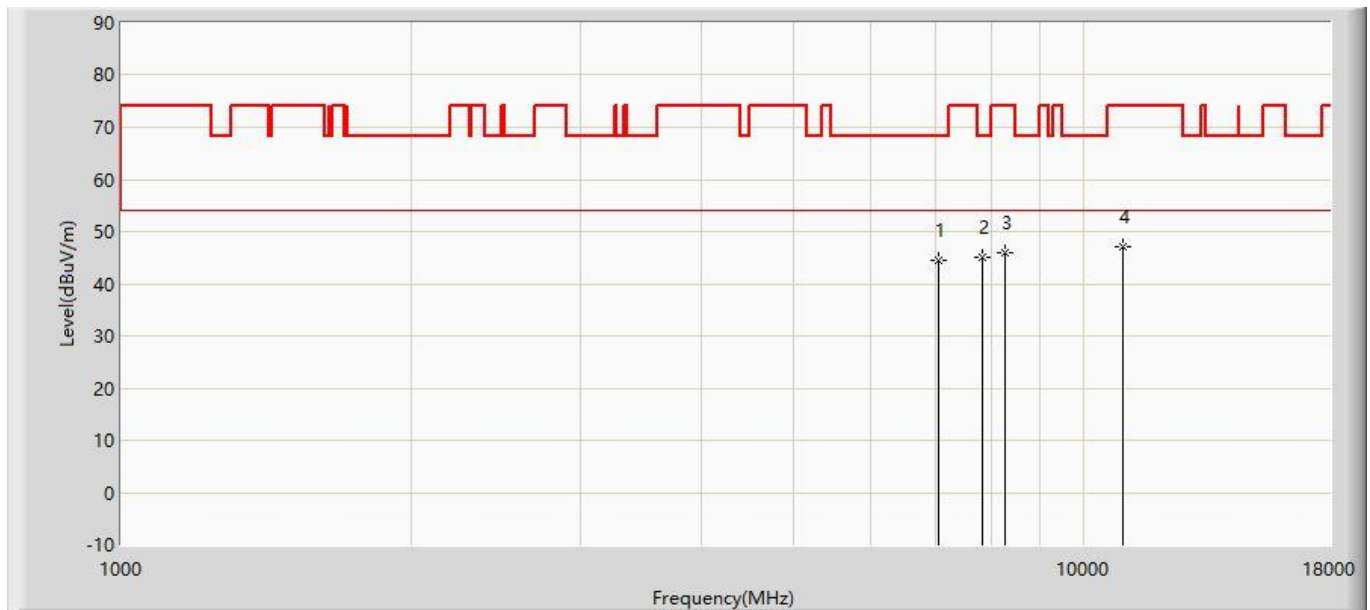


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			7060.500	44.514	33.780	-23.686	68.200	10.735	PK
2		*	7842.500	45.050	32.982	-23.150	68.200	12.067	PK
3			8276.000	46.062	33.708	-27.938	74.000	12.354	PK
4			10979.000	47.038	29.488	-26.962	74.000	17.550	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/22 - 16:02
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test: Transmit by 802.11 a at Channel 5700MHz with OAW-AP1361D (CDD Mode)	

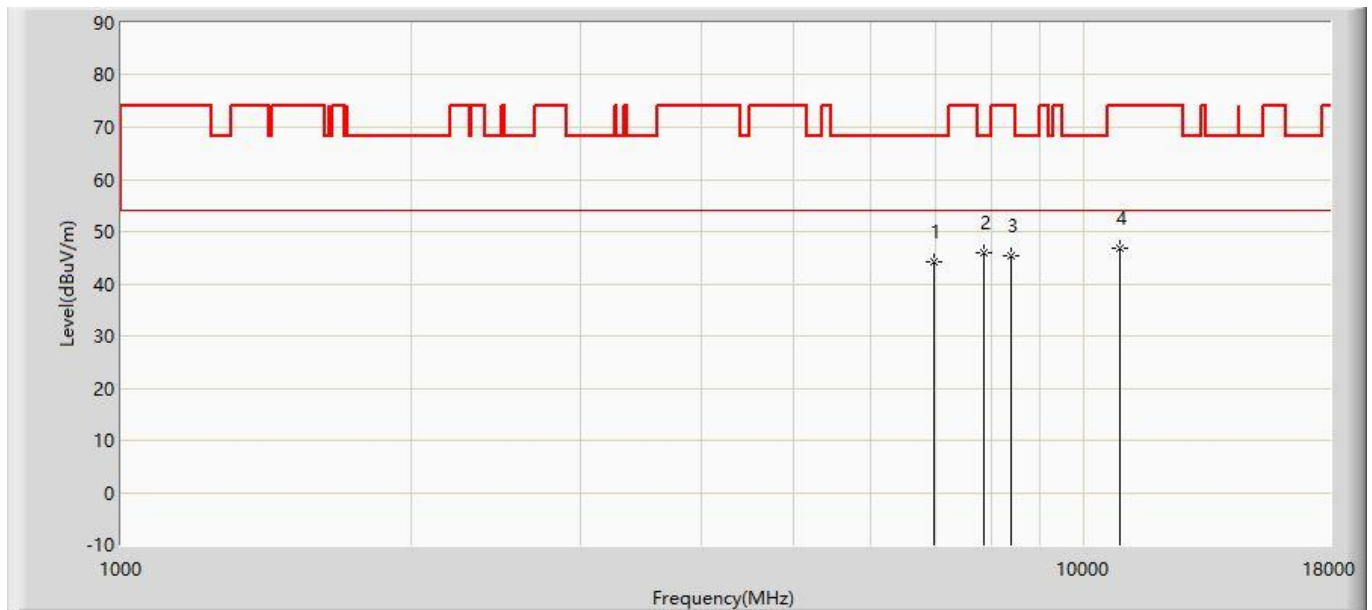


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			6984.000	44.256	33.749	-23.944	68.200	10.507	PK
2		*	7859.500	45.933	33.848	-22.267	68.200	12.086	PK
3			8395.000	45.319	32.911	-28.681	74.000	12.408	PK
4			10877.000	46.918	29.512	-27.082	74.000	17.406	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/22 - 16:02
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test: Transmit by 802.11 a at Channel 5720MHz with OAW-AP1361D (CDD Mode)	

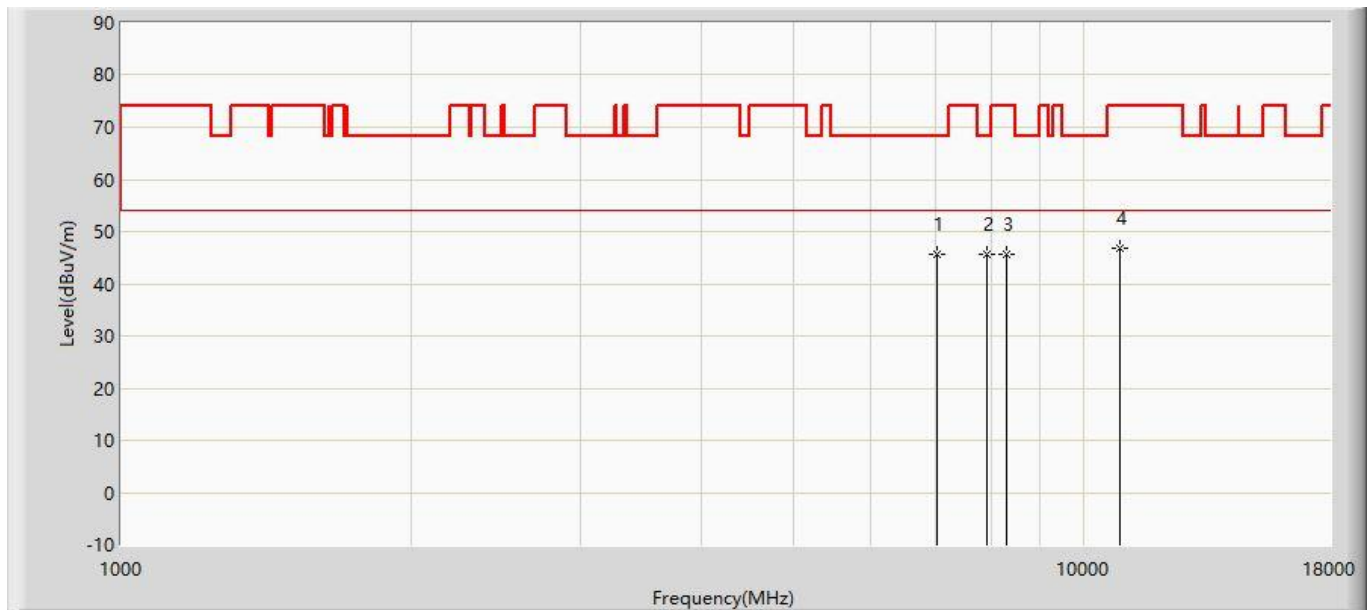


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			7035.000	45.532	34.854	-22.668	68.200	10.678	PK
2		*	7936.000	45.778	33.614	-22.422	68.200	12.164	PK
3			8293.000	45.666	33.304	-28.334	74.000	12.362	PK
4			10894.000	46.938	29.509	-27.062	74.000	17.429	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/22 - 16:03
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test: Transmit by 802.11 a at Channel 5720MHz with OAW-AP1361D (CDD Mode)	

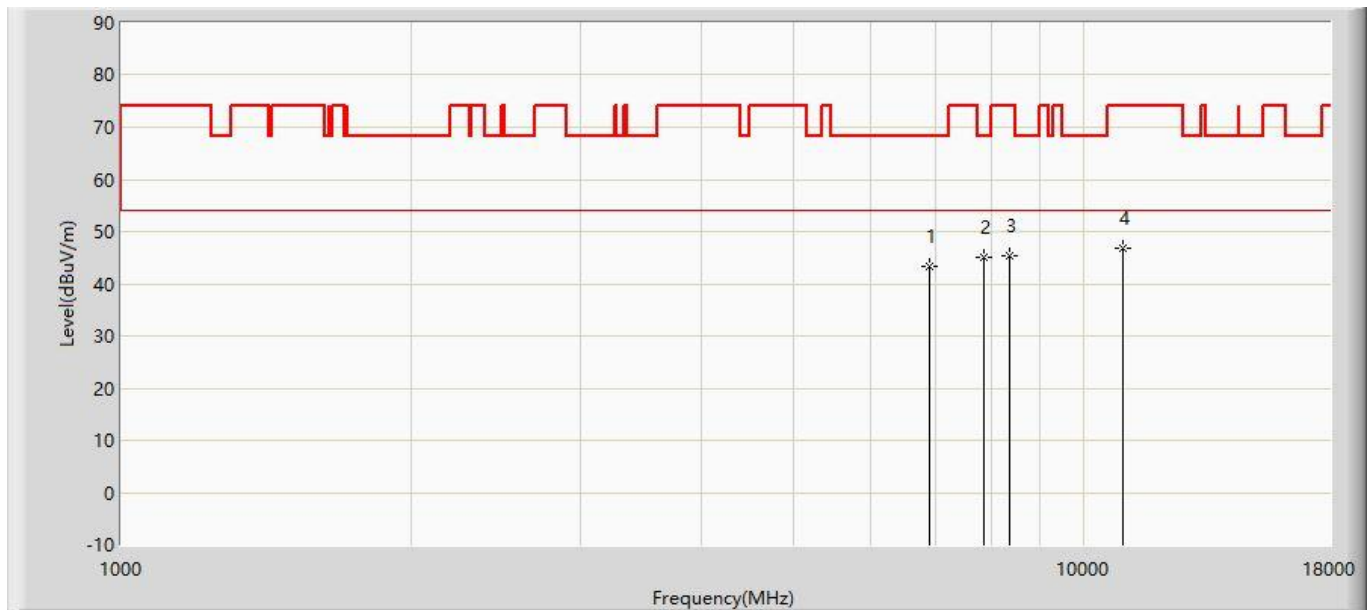


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			6916.000	43.218	33.106	-24.982	68.200	10.112	PK
2		*	7876.500	45.050	32.947	-23.150	68.200	12.104	PK
3			8378.000	45.448	33.047	-28.552	74.000	12.401	PK
4			10970.500	46.765	29.227	-27.235	74.000	17.538	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/22 - 16:03
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test: Transmit by 802.11 a at Channel 5740MHz with OAW-AP1361D (CDD Mode)	

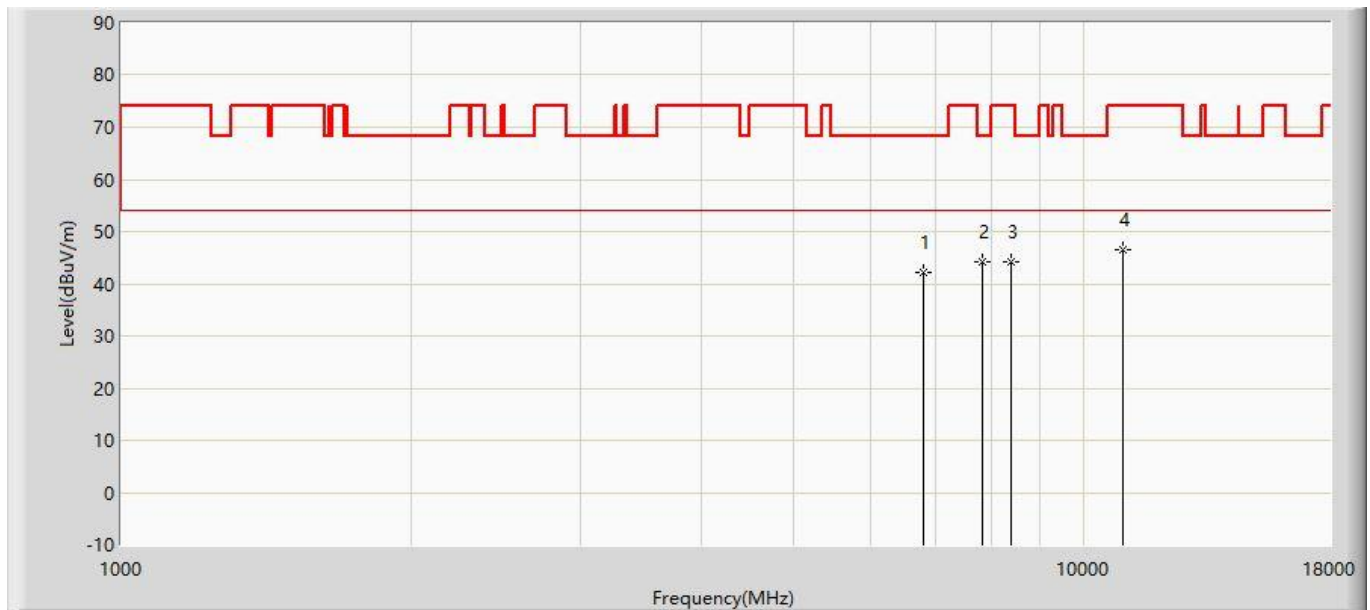


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			6822.500	42.057	32.488	-26.143	68.200	9.569	PK
2		*	7842.500	44.234	32.166	-23.966	68.200	12.067	PK
3			8403.500	44.342	31.930	-29.658	74.000	12.412	PK
4			10987.500	46.403	28.840	-27.597	74.000	17.563	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/22 - 16:03
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test: Transmit by 802.11 a at Channel 5740MHz with OAW-AP1361D (CDD Mode)	

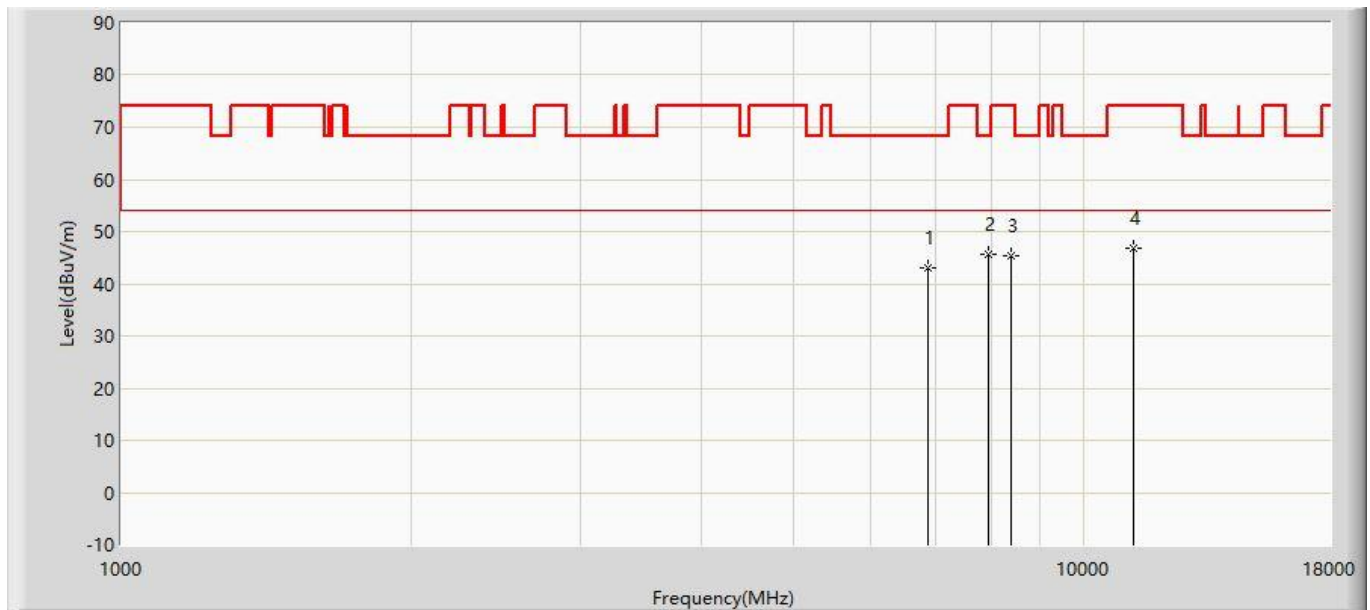

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			6890.500	43.114	33.150	-25.086	68.200	9.964	PK
2		*	7953.000	45.565	33.384	-22.635	68.200	12.181	PK
3			8412.000	45.378	32.962	-28.622	74.000	12.416	PK
4			11242.500	46.953	29.145	-27.047	74.000	17.807	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/22 - 16:04
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test: Transmit by 802.11 a at Channel 5785MHz with OAW-AP1361D (CDD Mode)	




No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	6975.500	44.313	33.856	-23.887	68.200	10.458	PK
2			7910.500	44.271	32.132	-23.929	68.200	12.138	PK
3			8403.500	45.220	32.808	-28.780	74.000	12.412	PK
4			10936.500	47.776	30.287	-26.224	74.000	17.489	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/22 - 16:04
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test: Transmit by 802.11 a at Channel 5785MHz with OAW-AP1361D (CDD Mode)	

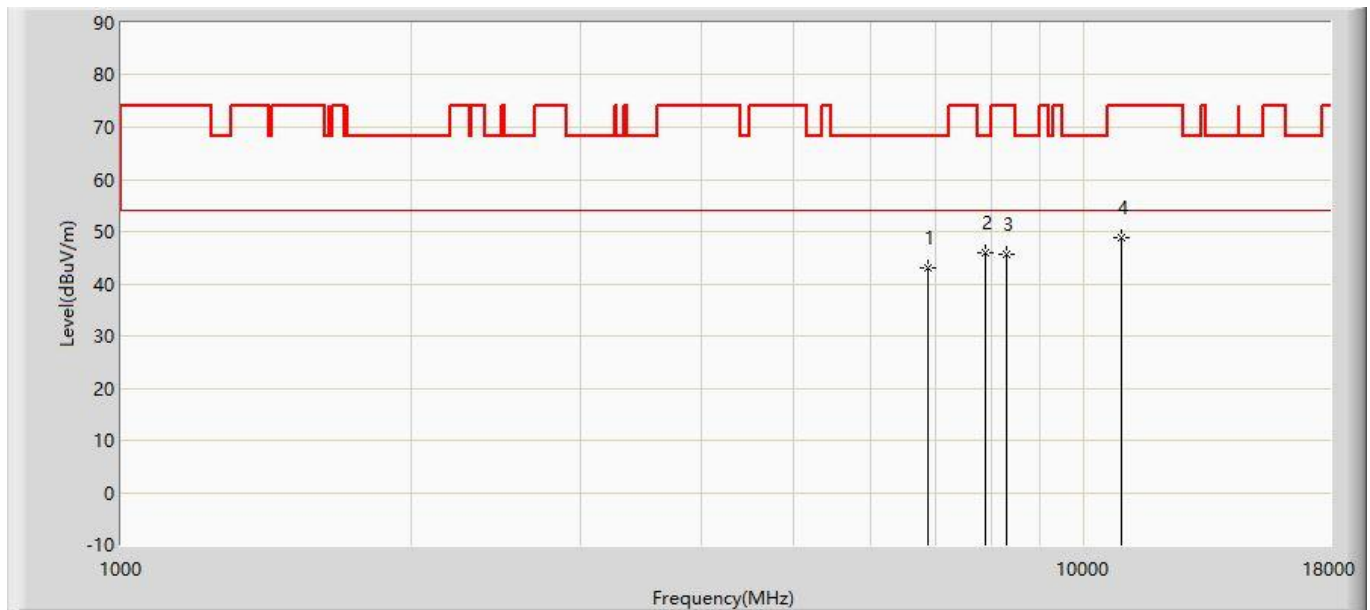


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			6890.500	43.030	33.066	-25.170	68.200	9.964	PK
2		*	7902.000	46.040	33.910	-22.160	68.200	12.130	PK
3			8293.000	45.683	33.321	-28.317	74.000	12.362	PK
4			10919.500	48.910	31.444	-25.090	74.000	17.465	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/22 - 16:05
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test: Transmit by 802.11 a at Channel 5825MHz with OAW-AP1361D (CDD Mode)	

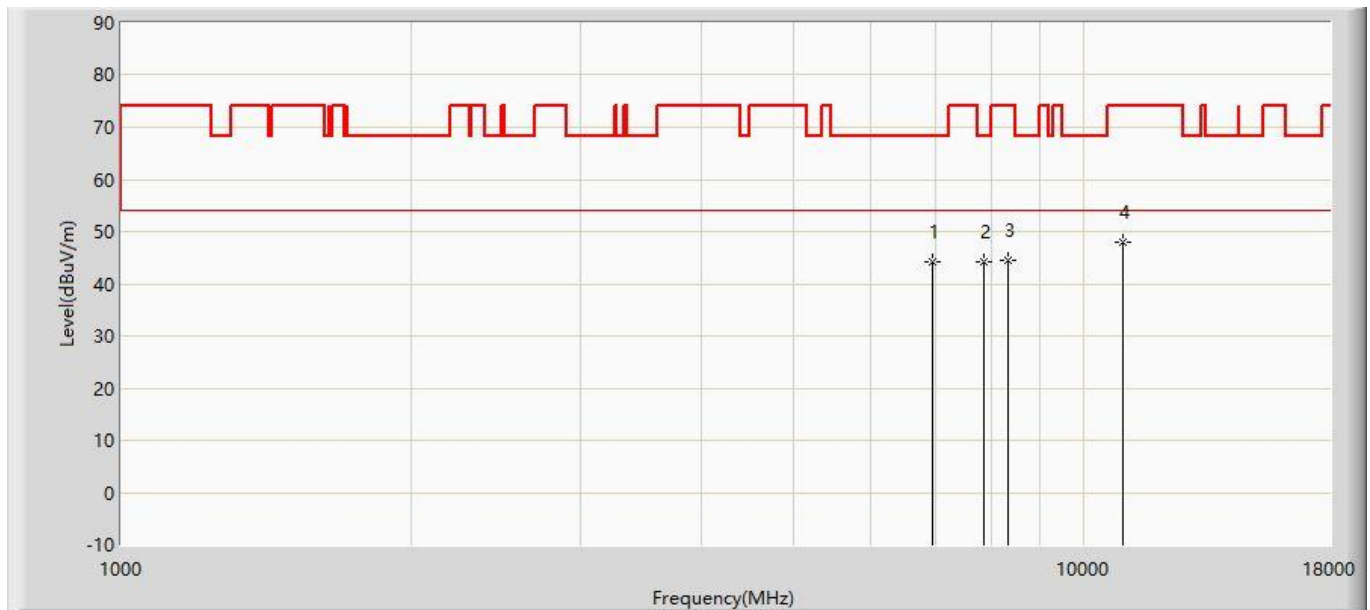

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	6967.000	44.297	33.889	-23.903	68.200	10.408	PK
2			7868.000	44.252	32.158	-23.948	68.200	12.094	PK
3			8327.000	44.593	32.216	-29.407	74.000	12.377	PK
4			10987.500	48.094	30.531	-25.906	74.000	17.563	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/22 - 16:05
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test: Transmit by 802.11 a at Channel 5825MHz with OAW-AP1361D (CDD Mode)	




No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			7009.500	44.540	33.918	-23.660	68.200	10.622	PK
2		*	7893.500	45.540	33.419	-22.660	68.200	12.121	PK
3			8310.000	45.897	33.528	-28.103	74.000	12.369	PK
4			11021.500	47.620	30.020	-26.380	74.000	17.600	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/22 - 16:06
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test: Transmit by 802.11 n-HT20 at Channel 5180MHz with OAW-AP1361D (CDD Mode)	

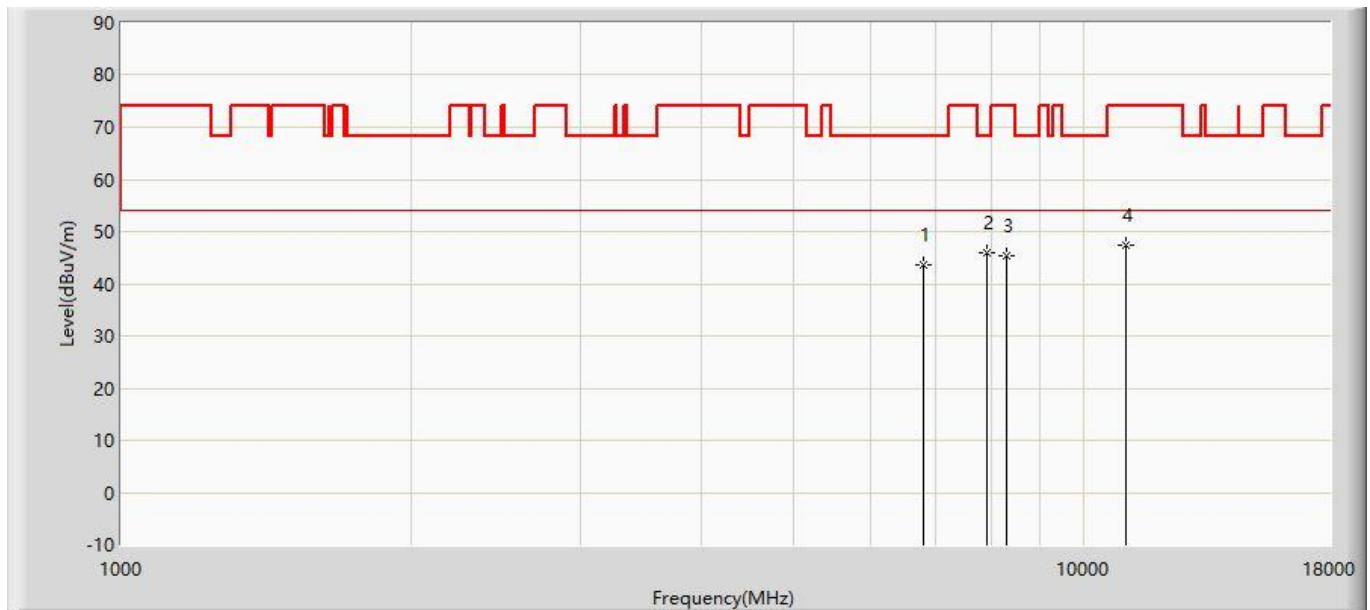


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			6822.500	43.683	34.114	-24.517	68.200	9.569	PK
2		*	7919.000	45.922	33.775	-22.278	68.200	12.147	PK
3			8310.000	45.227	32.858	-28.773	74.000	12.369	PK
4			11038.500	47.363	29.747	-26.637	74.000	17.616	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/22 - 16:06
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test: Transmit by 802.11 n-HT20 at Channel 5180MHz with OAW-AP1361D (CDD Mode)	

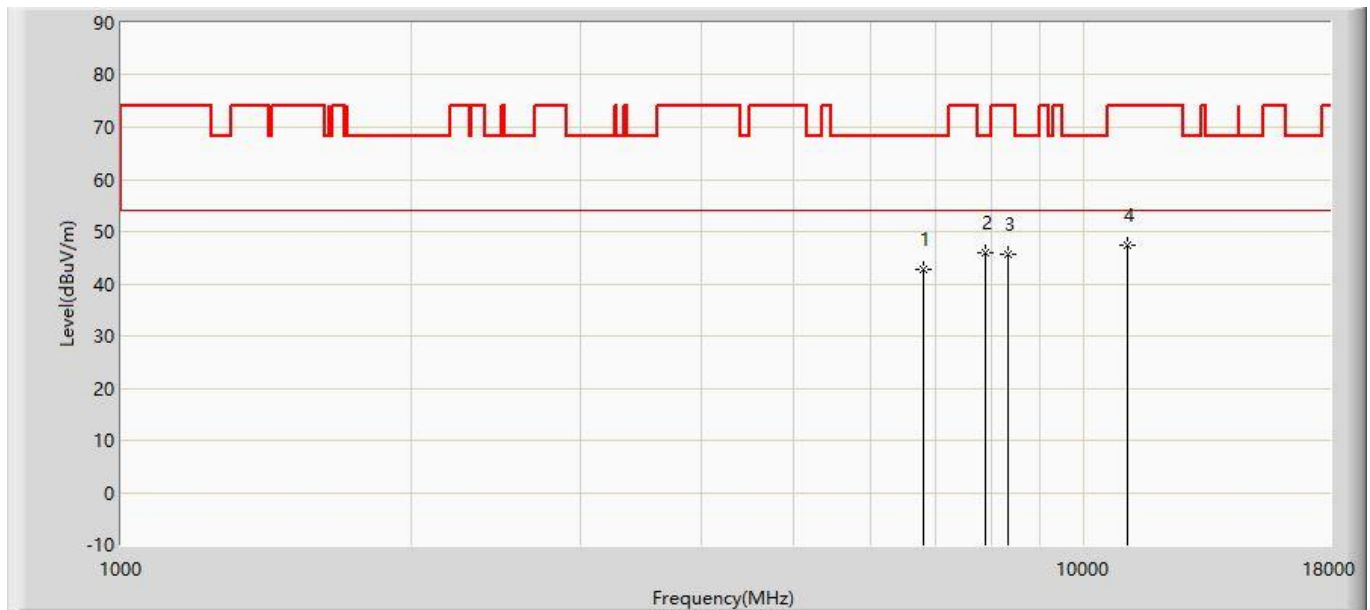


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			6822.500	42.785	33.216	-25.415	68.200	9.569	PK
2		*	7893.500	45.920	33.799	-22.280	68.200	12.121	PK
3			8344.000	45.532	33.148	-28.468	74.000	12.384	PK
4			11081.000	47.258	29.602	-26.742	74.000	17.656	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/22 - 16:07
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test: Transmit by 802.11 n-HT20 at Channel 5220MHz with OAW-AP1361D (CDD Mode)	

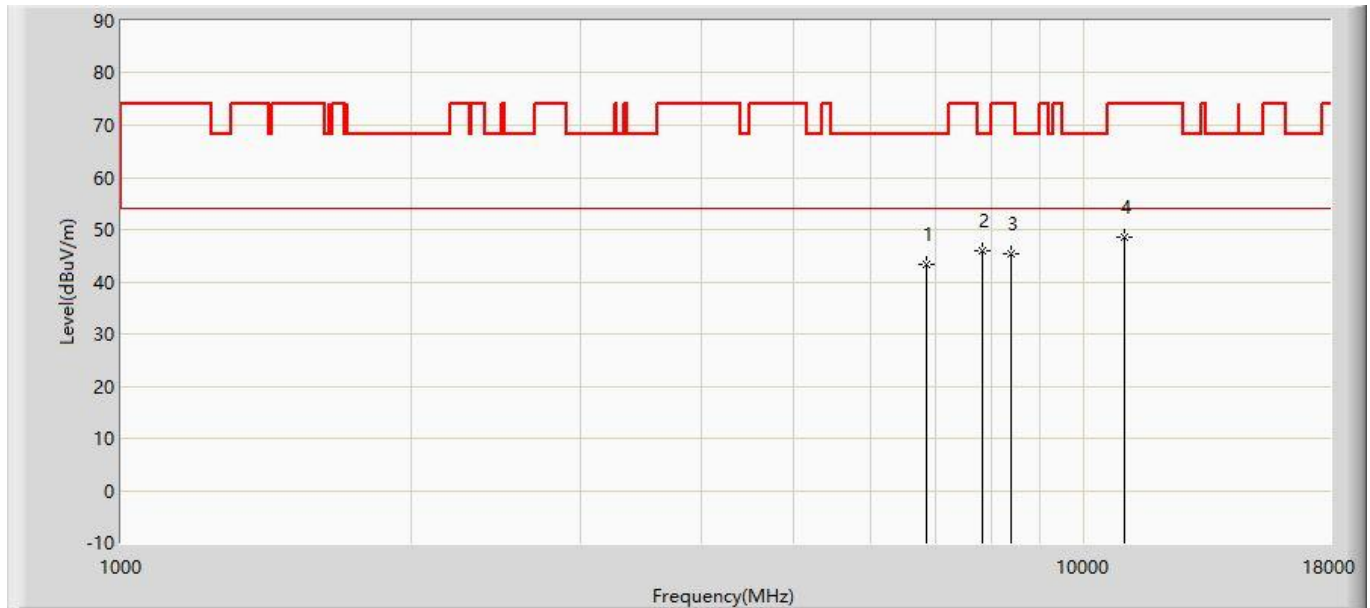


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			6856.500	43.234	33.468	-24.966	68.200	9.766	PK
2		*	7851.000	45.847	33.771	-22.353	68.200	12.076	PK
3			8395.000	45.451	33.043	-28.549	74.000	12.408	PK
4			11013.000	48.482	30.890	-25.518	74.000	17.592	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/22 - 16:08
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test: Transmit by 802.11 n-HT20 at Channel 5220MHz with OAW-AP1361D (CDD Mode)	

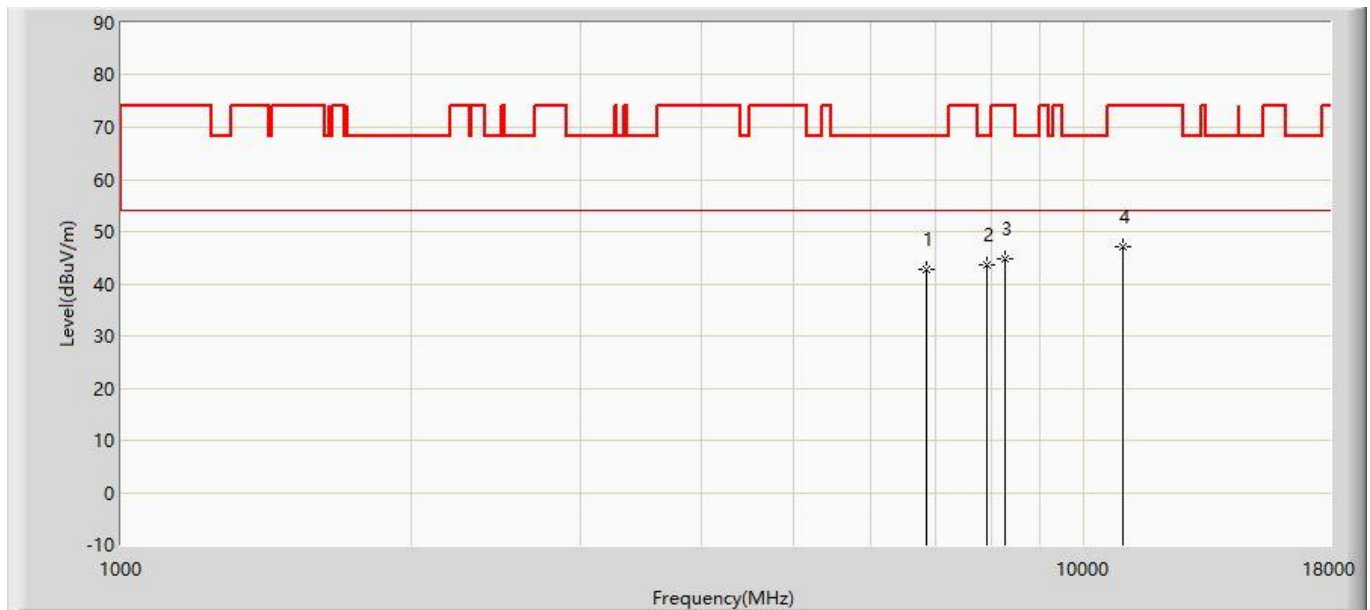


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			6856.500	42.726	32.960	-25.474	68.200	9.766	PK
2		*	7919.000	43.590	31.443	-24.610	68.200	12.147	PK
3			8284.500	44.842	32.484	-29.158	74.000	12.358	PK
4			10970.500	46.958	29.420	-27.042	74.000	17.538	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/22 - 16:11
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test: Transmit by 802.11 n-HT20 at Channel 5240MHz with OAW-AP1361D (CDD Mode)	

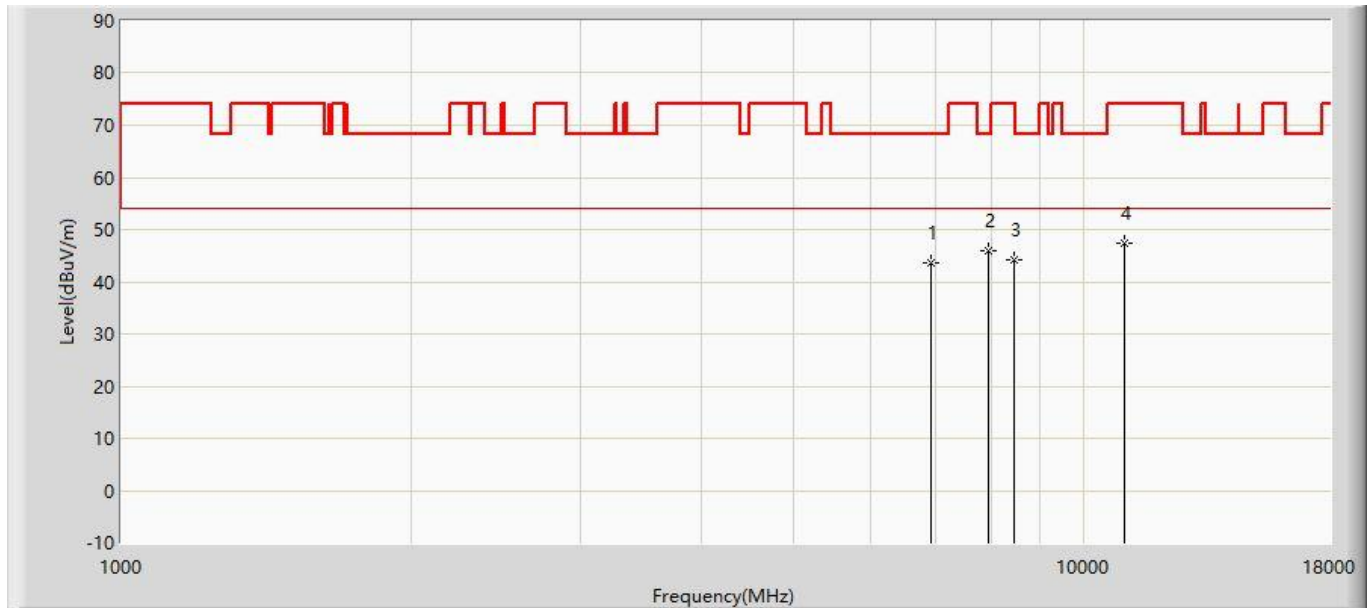


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			6924.500	43.531	33.370	-24.669	68.200	10.161	PK
2		*	7961.500	45.891	33.701	-22.309	68.200	12.190	PK
3			8463.000	44.232	31.794	-29.768	74.000	12.438	PK
4			11030.000	47.489	29.881	-26.511	74.000	17.608	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/22 - 16:12
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test: Transmit by 802.11 n-HT20 at Channel 5240MHz with OAW-AP1361D (CDD Mode)	

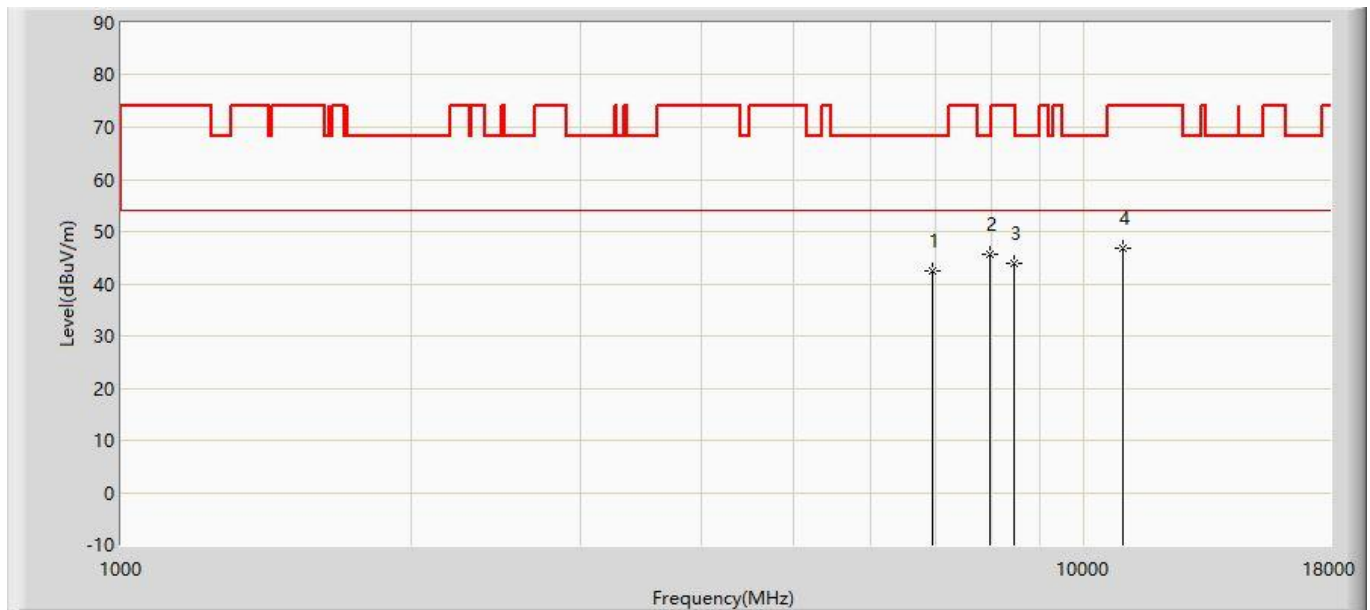


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			6950.000	42.376	32.066	-25.824	68.200	10.310	PK
2		*	7970.000	45.672	33.473	-22.528	68.200	12.199	PK
3			8454.500	43.894	31.459	-30.106	74.000	12.435	PK
4			10979.000	46.746	29.196	-27.254	74.000	17.550	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/22 - 16:12
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test: Transmit by 802.11 n-HT20 at Channel 5240MHz with OAW-AP1361D (CDD Mode)	

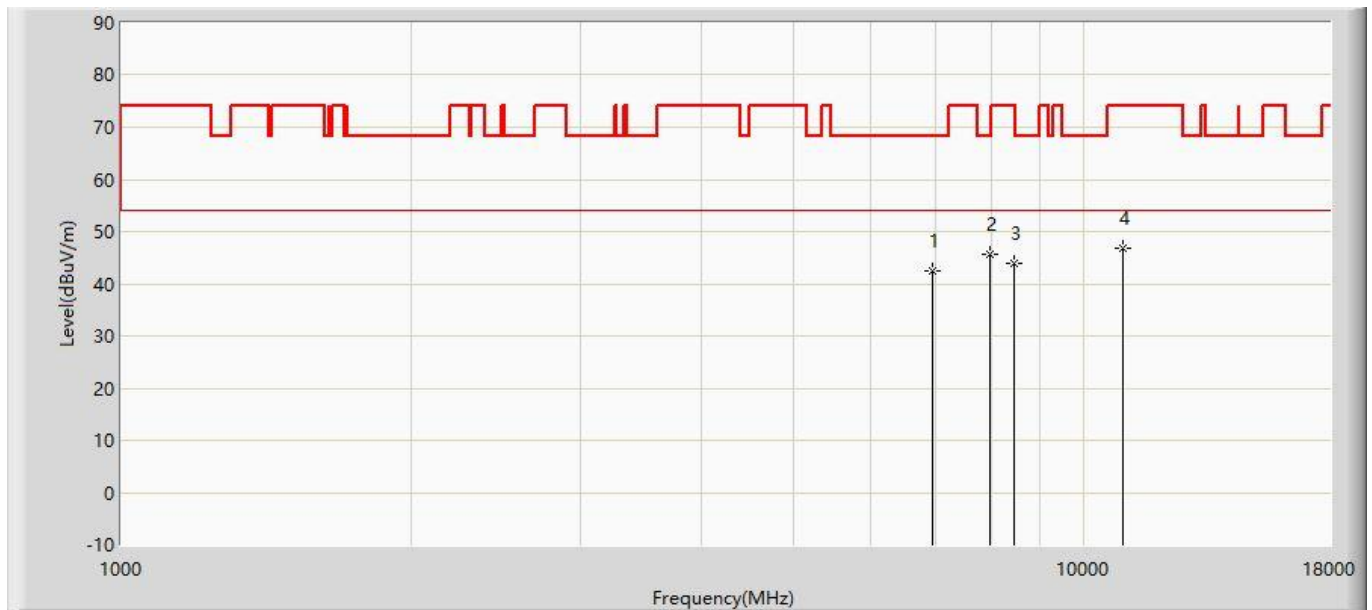


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			6950.000	42.376	32.066	-25.824	68.200	10.310	PK
2		*	7970.000	45.672	33.473	-22.528	68.200	12.199	PK
3			8454.500	43.894	31.459	-30.106	74.000	12.435	PK
4			10979.000	46.746	29.196	-27.254	74.000	17.550	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/22 - 16:13
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test: Transmit by 802.11 n-HT20 at Channel 5260MHz with OAW-AP1361D (CDD Mode)	

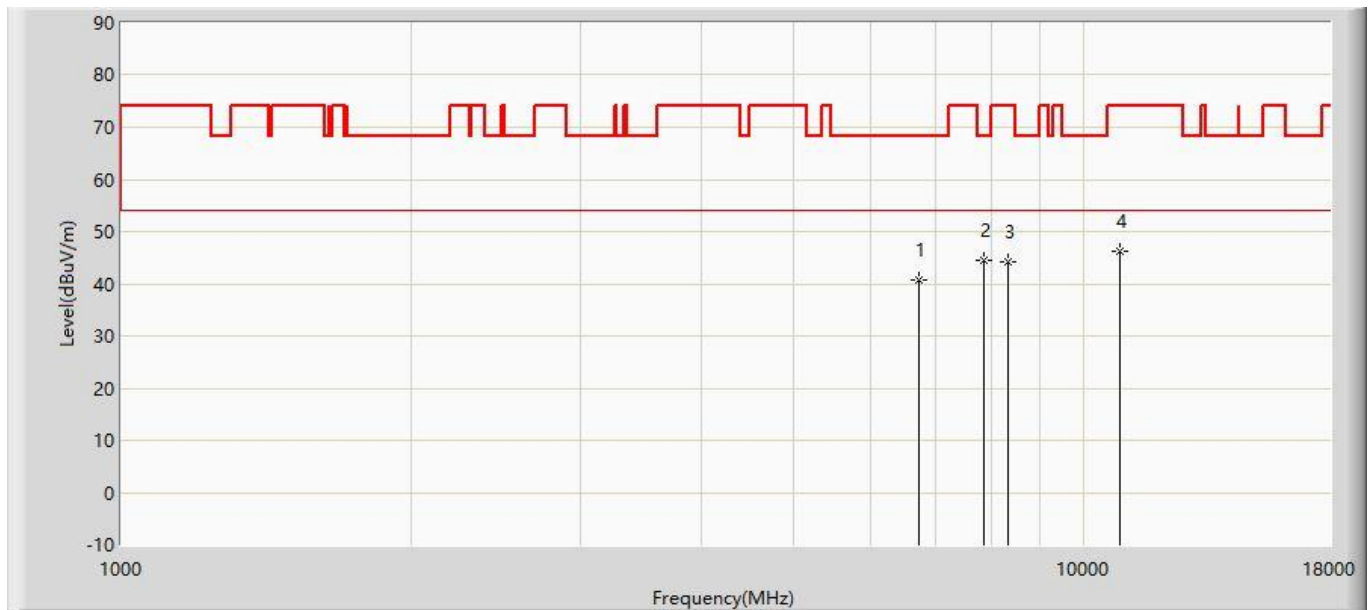


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			6737.500	40.782	31.707	-27.418	68.200	9.075	PK
2		*	7868.000	44.548	32.454	-23.652	68.200	12.094	PK
3			8352.500	44.250	31.862	-29.750	74.000	12.388	PK
4			10902.500	46.298	28.856	-27.702	74.000	17.442	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/22 - 16:14
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test: Transmit by 802.11 n-HT20 at Channel 5300MHz with OAW-AP1361D (CDD Mode)	

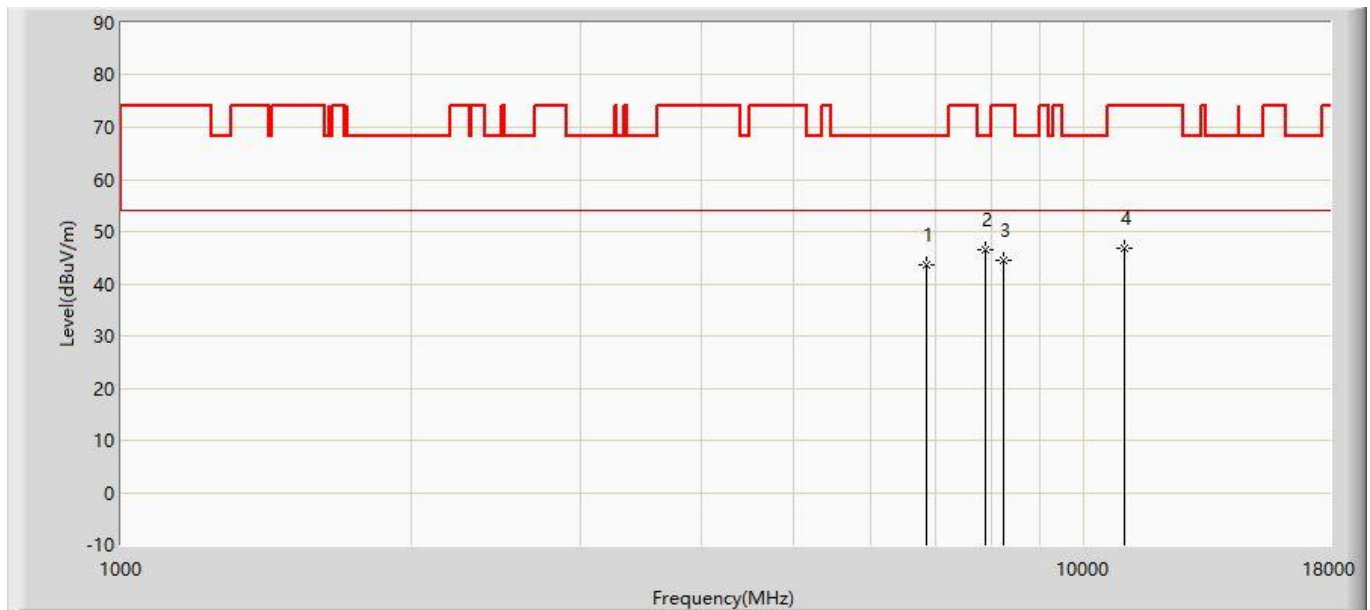


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			6856.500	43.641	33.875	-24.559	68.200	9.766	PK
2		*	7902.000	46.504	34.374	-21.696	68.200	12.130	PK
3			8242.000	44.485	32.146	-29.515	74.000	12.339	PK
4			10996.000	46.722	29.147	-27.278	74.000	17.575	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/22 - 16:15
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test: Transmit by 802.11 n-HT20 at Channel 5300MHz with OAW-AP1361D (CDD Mode)	

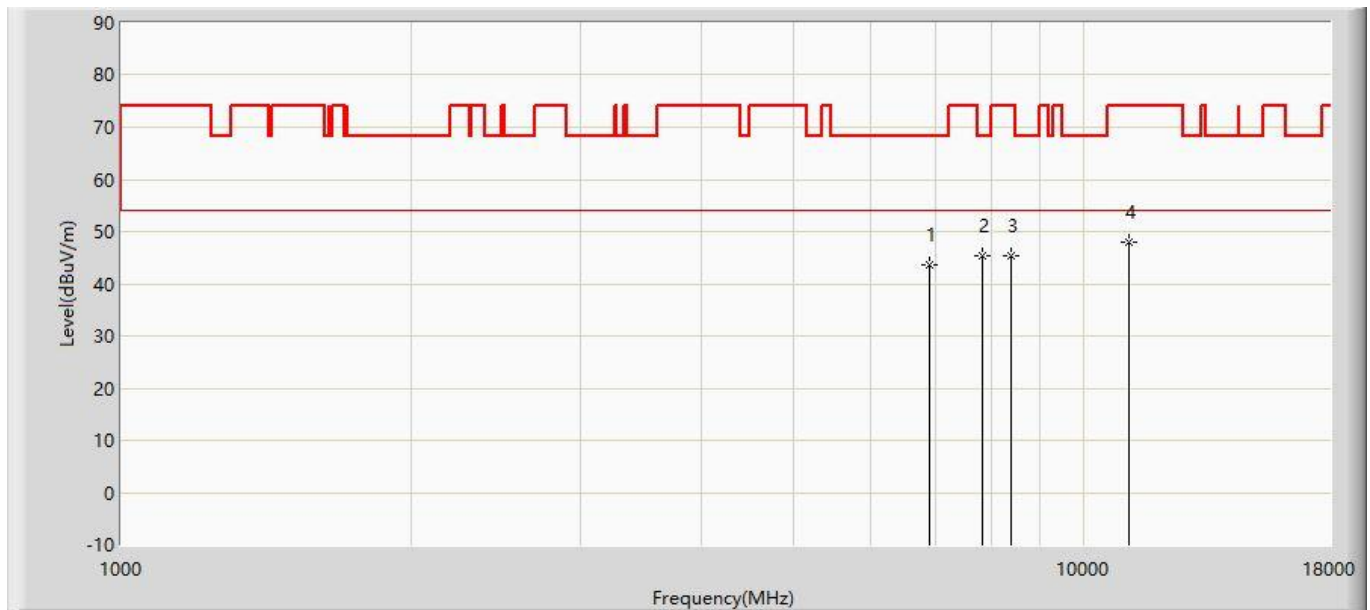


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			6907.500	43.583	33.520	-24.617	68.200	10.063	PK
2		*	7842.500	45.346	33.278	-22.854	68.200	12.067	PK
3			8403.500	45.465	33.053	-28.535	74.000	12.412	PK
4			11123.500	48.051	30.355	-25.949	74.000	17.696	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/22 - 16:16
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test: Transmit by 802.11 n-HT20 at Channel 5320MHz with OAW-AP1361D (CDD Mode)	

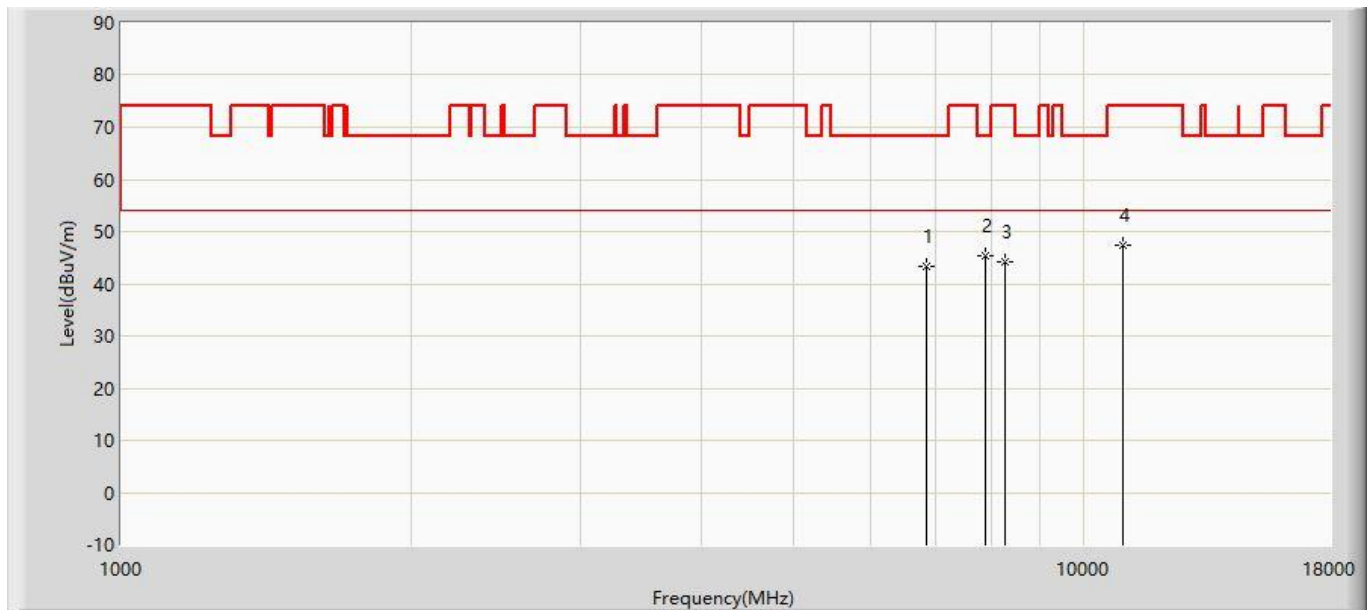


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			6856.500	43.288	33.522	-24.912	68.200	9.766	PK
2		*	7893.500	45.302	33.181	-22.898	68.200	12.121	PK
3			8276.000	44.133	31.779	-29.867	74.000	12.354	PK
4			10970.500	47.400	29.862	-26.600	74.000	17.538	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/22 - 16:17
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test: Transmit by 802.11 n-HT20 at Channel 5320MHz with OAW-AP1361D (CDD Mode)	

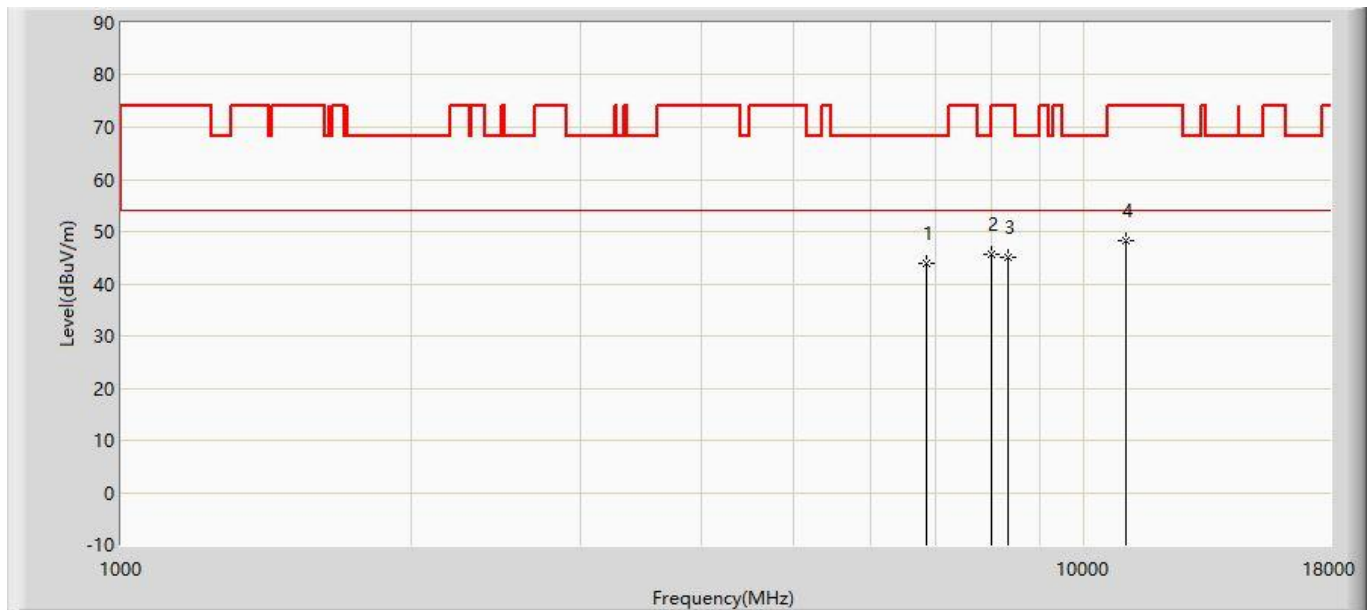


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			6856.500	43.870	34.104	-24.330	68.200	9.766	PK
2		*	8004.000	45.584	33.353	-22.616	68.200	12.231	PK
3			8327.000	44.966	32.589	-29.034	74.000	12.377	PK
4			11047.000	48.332	30.708	-25.668	74.000	17.624	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/22 - 16:17
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test: Transmit by 802.11 n-HT20 at Channel 5500MHz with OAW-AP1361D (CDD Mode)	

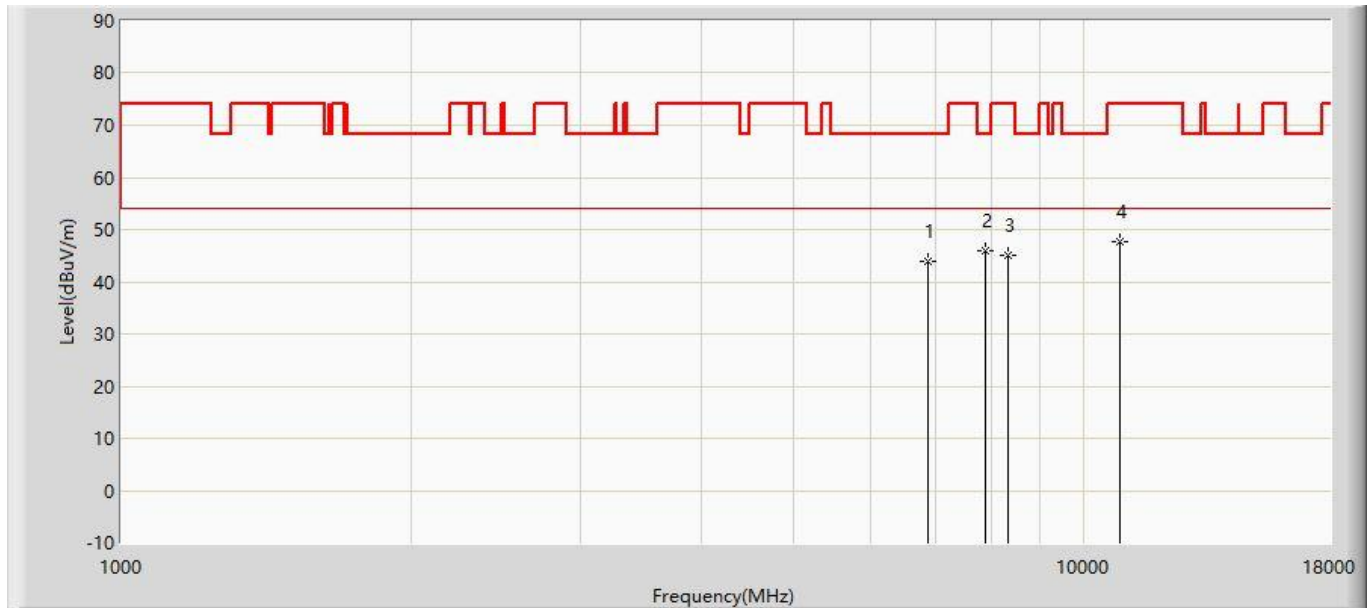


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			6873.500	43.896	34.031	-24.304	68.200	9.865	PK
2		*	7885.000	45.824	33.712	-22.376	68.200	12.112	PK
3			8352.500	45.106	32.718	-28.894	74.000	12.388	PK
4			10894.000	47.683	30.254	-26.317	74.000	17.429	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/22 - 16:18
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test: Transmit by 802.11 n-HT20 at Channel 5500MHz with OAW-AP1361D (CDD Mode)	

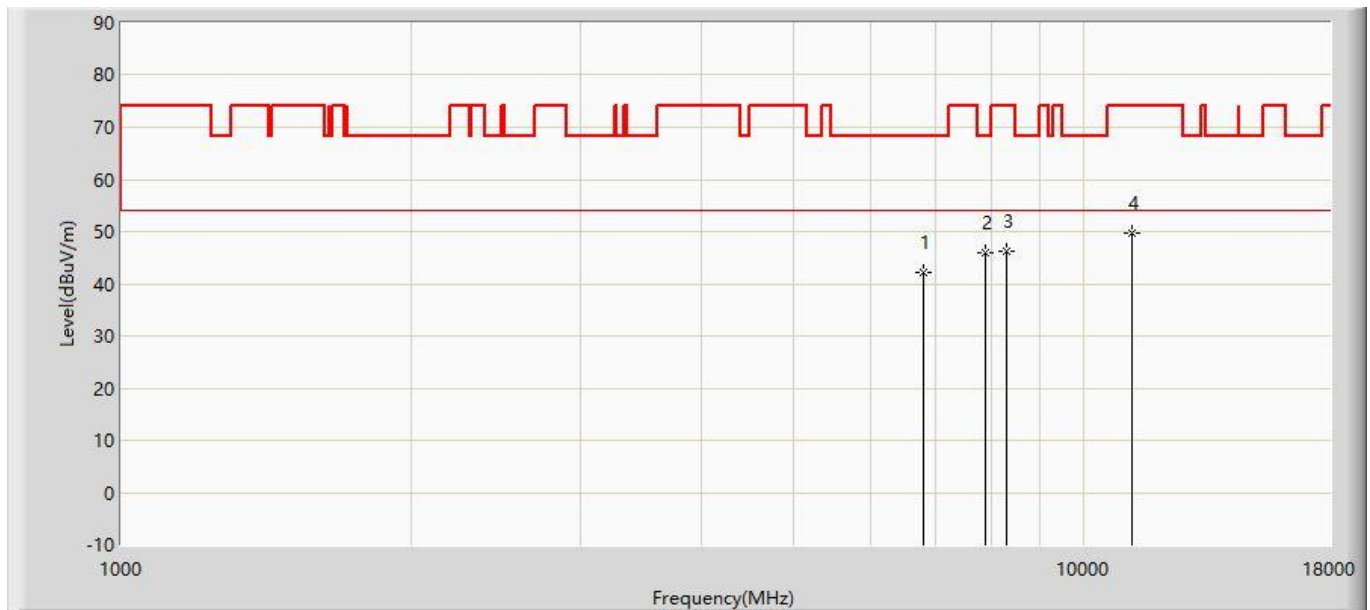


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			6822.500	42.182	32.613	-26.018	68.200	9.569	PK
2		*	7885.000	45.824	33.712	-22.376	68.200	12.112	PK
3			8310.000	46.341	33.972	-27.659	74.000	12.369	PK
4			11200.000	49.572	31.804	-24.428	74.000	17.768	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/22 - 16:18
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test: Transmit by 802.11 n-HT20 at Channel 5600MHz with OAW-AP1361D (CDD Mode)	

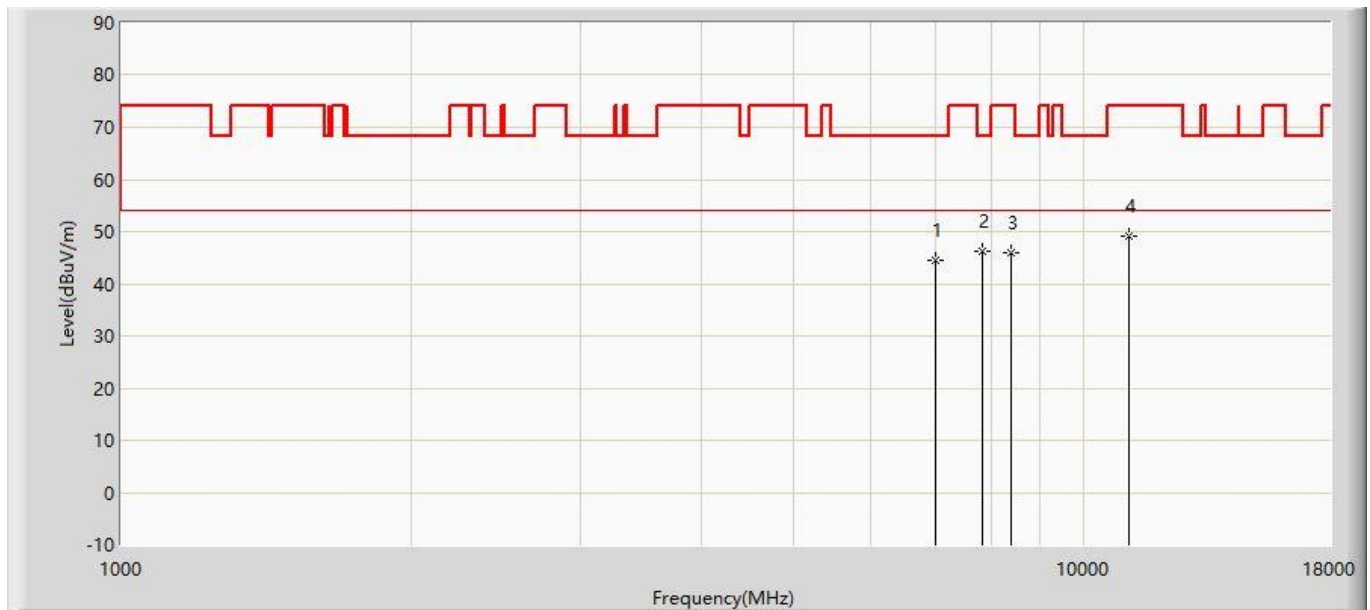

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			7018.000	44.574	33.933	-23.626	68.200	10.641	PK
2		*	7842.500	46.168	34.100	-22.032	68.200	12.067	PK
3			8386.500	45.817	33.413	-28.183	74.000	12.404	PK
4			11149.000	49.177	31.457	-24.823	74.000	17.720	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/22 - 16:20
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test: Transmit by 802.11 n-HT20 at Channel 5600MHz with OAW-AP1361D (CDD Mode)	




No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			7026.500	44.645	33.985	-23.555	68.200	10.660	PK
2		*	7902.000	45.699	33.569	-22.501	68.200	12.130	PK
3			8327.000	45.600	33.223	-28.400	74.000	12.377	PK
4			10885.500	48.471	31.053	-25.529	74.000	17.417	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/22 - 16:26
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test: Transmit by 802.11 n-HT20 at Channel 5700MHz with OAW-AP1361D (CDD Mode)	

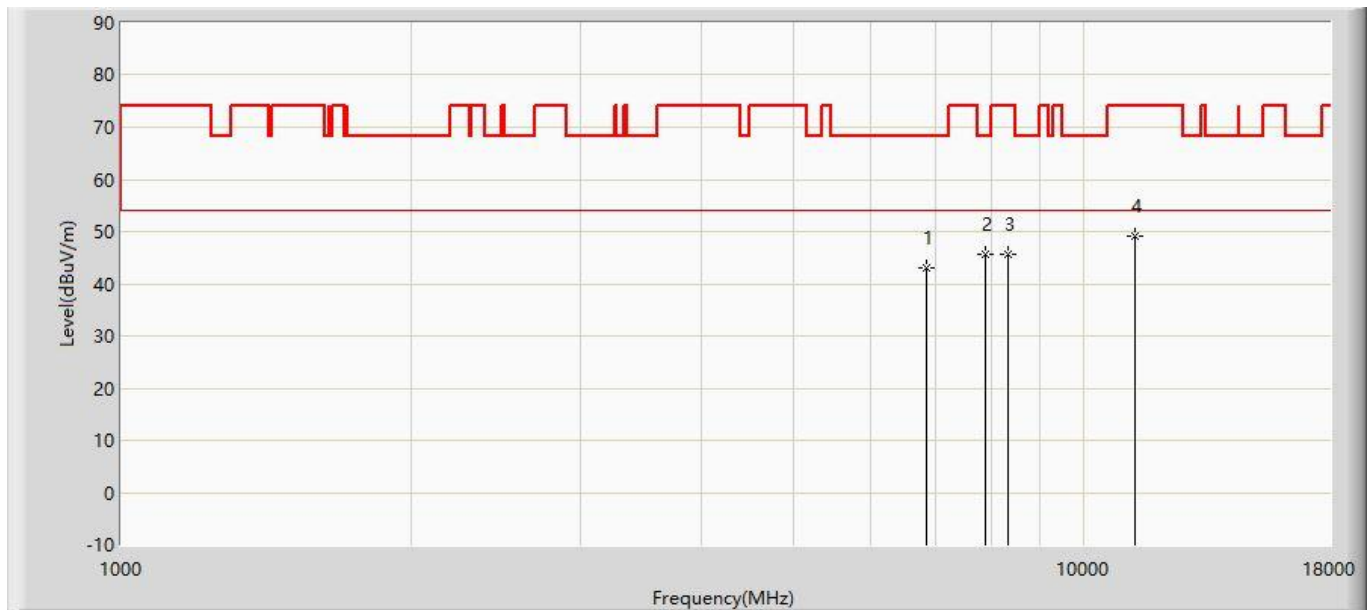

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			6856.500	42.999	33.233	-25.201	68.200	9.766	PK
2		*	7893.500	45.788	33.667	-22.412	68.200	12.121	PK
3			8335.500	45.785	33.404	-28.215	74.000	12.381	PK
4			11285.000	49.037	31.190	-24.963	74.000	17.847	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/22 - 16:27
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test: Transmit by 802.11 n-HT20 at Channel 5700MHz with OAW-AP1361D (CDD Mode)	




No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			7043.500	44.857	34.160	-23.343	68.200	10.696	PK
2		*	7893.500	45.048	32.927	-23.152	68.200	12.121	PK
3			8352.500	45.485	33.097	-28.515	74.000	12.388	PK
4			10936.500	48.644	31.155	-25.356	74.000	17.489	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/22 - 16:27
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test: Transmit by 802.11 n-HT20 at Channel 5720MHz with OAW-AP1361D (CDD Mode)	

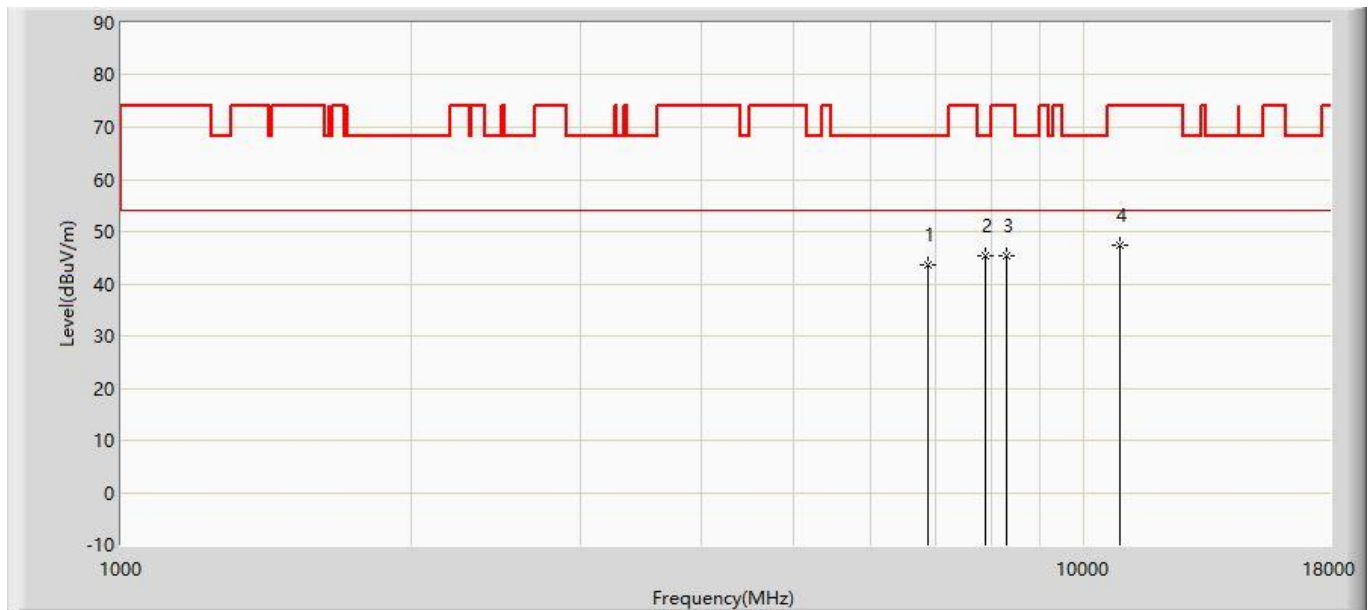


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			6882.000	43.768	33.853	-24.432	68.200	9.915	PK
2		*	7893.500	45.331	33.210	-22.869	68.200	12.121	PK
3			8301.500	45.476	33.110	-28.524	74.000	12.366	PK
4			10885.500	47.386	29.968	-26.614	74.000	17.417	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/22 - 16:27
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test: Transmit by 802.11 n-HT20 at Channel 5720MHz with OAW-AP1361D (CDD Mode)	

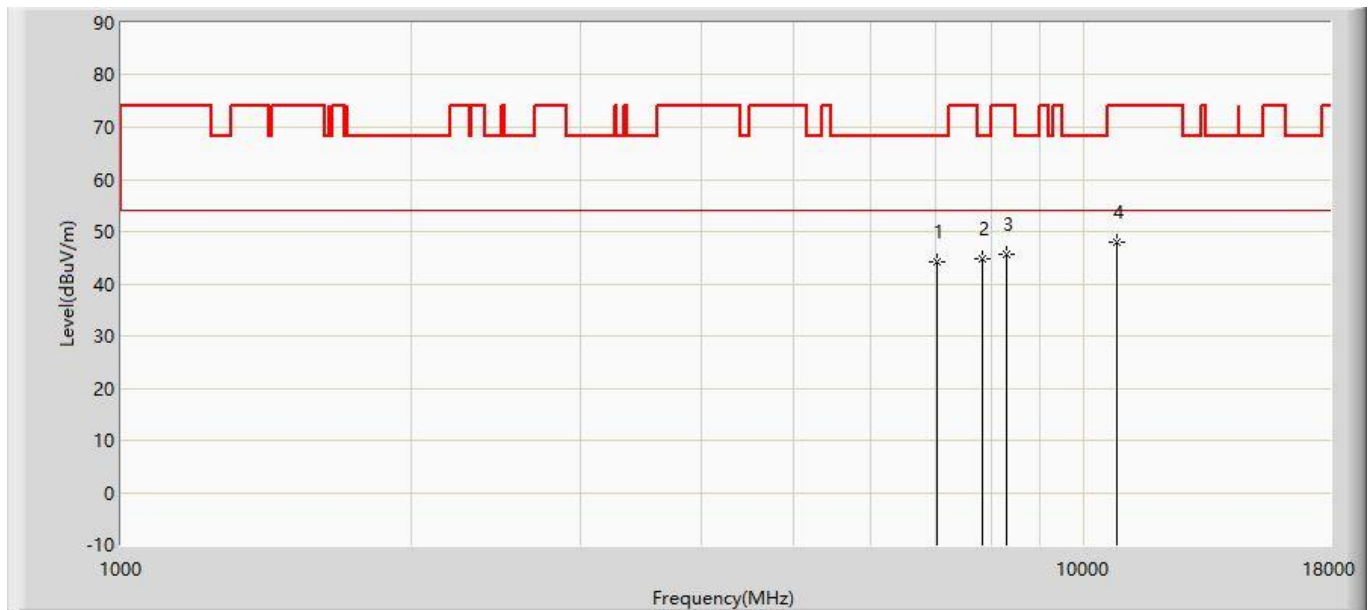


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			7026.500	44.221	33.561	-23.979	68.200	10.660	PK
2		*	7842.500	44.907	32.839	-23.293	68.200	12.067	PK
3			8301.500	45.577	33.211	-28.423	74.000	12.366	PK
4			10834.500	48.010	30.665	-25.990	74.000	17.345	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/22 - 16:28
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test: Transmit by 802.11 n-HT20 at Channel 5745MHz with OAW-AP1361D (CDD Mode)	

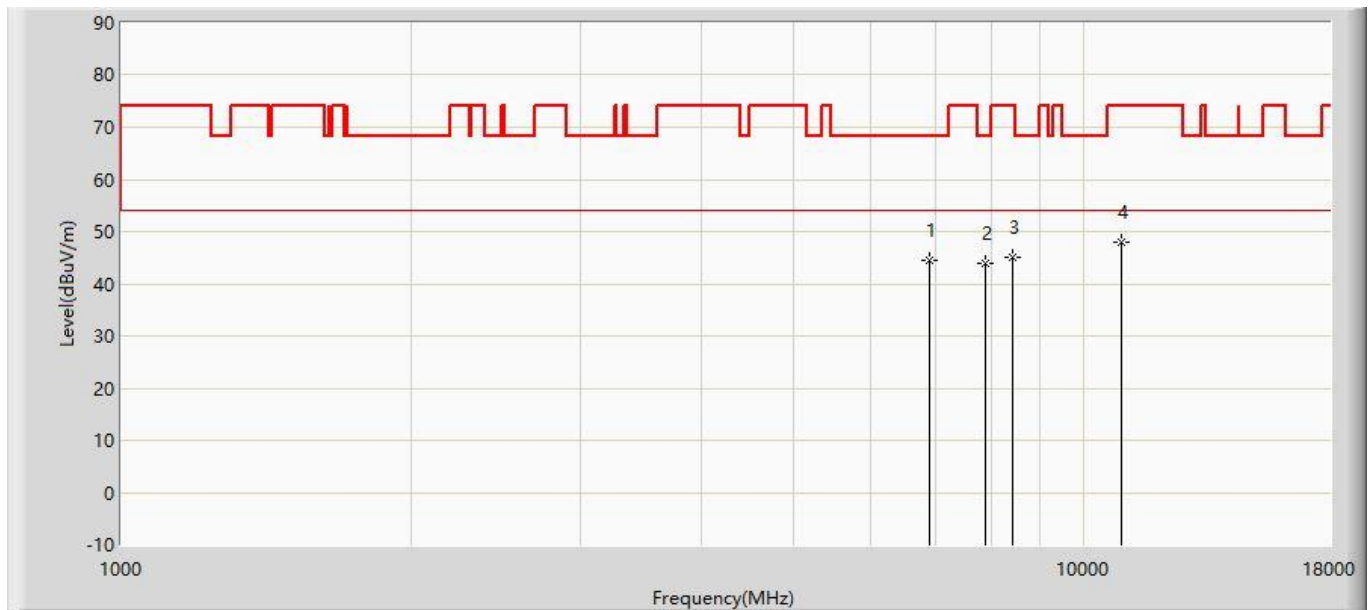


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	6907.500	44.401	34.338	-23.799	68.200	10.063	PK
2			7885.000	43.908	31.796	-24.292	68.200	12.112	PK
3			8429.000	45.147	32.724	-28.853	74.000	12.423	PK
4			10928.000	48.000	30.523	-26.000	74.000	17.477	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/22 - 16:28
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test: Transmit by 802.11 n-HT20 at Channel 5745MHz with OAW-AP1361D (CDD Mode)	

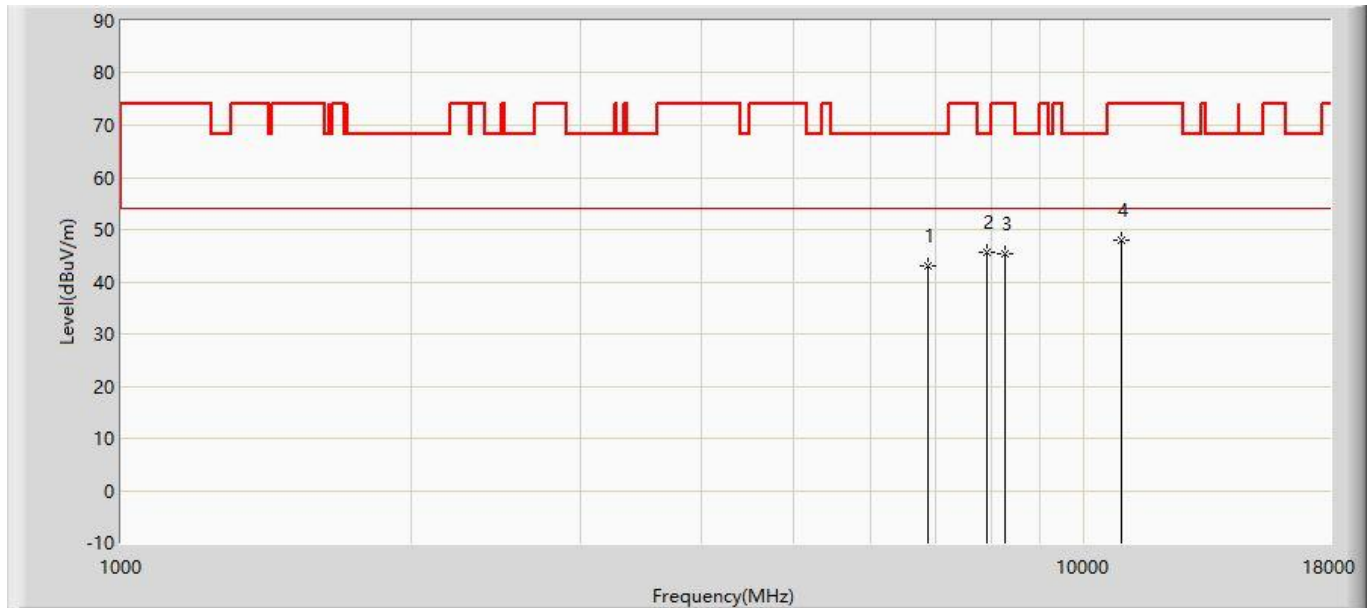


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			6882.000	43.011	33.096	-25.189	68.200	9.915	PK
2		*	7936.000	45.593	33.429	-22.607	68.200	12.164	PK
3			8284.500	45.295	32.937	-28.705	74.000	12.358	PK
4			10928.000	48.033	30.556	-25.967	74.000	17.477	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/22 - 16:29
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test: Transmit by 802.11 n-HT20 at Channel 5785MHz with OAW-AP1361D (CDD Mode)	

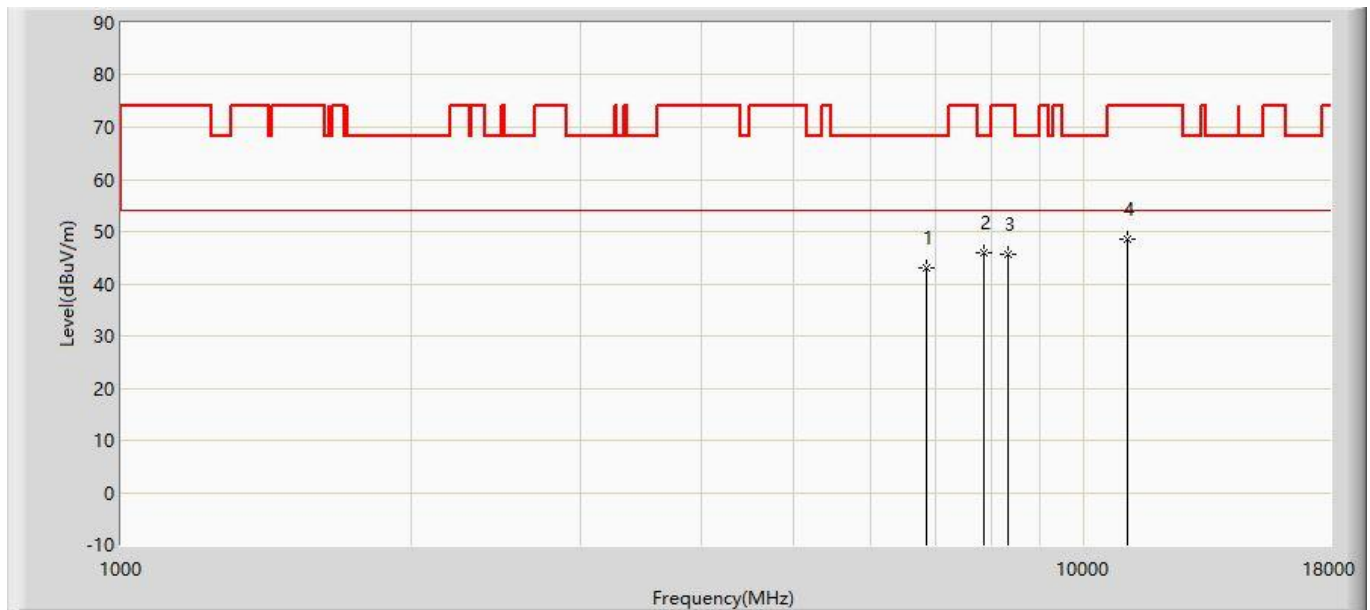


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			6865.000	43.053	33.237	-25.147	68.200	9.816	PK
2		*	7859.500	45.883	33.798	-22.317	68.200	12.086	PK
3			8352.500	45.535	33.147	-28.465	74.000	12.388	PK
4			11106.500	48.685	31.005	-25.315	74.000	17.679	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/22 - 16:30
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test: Transmit by 802.11 n-HT20 at Channel 5785MHz with OAW-AP1361D (CDD Mode)	

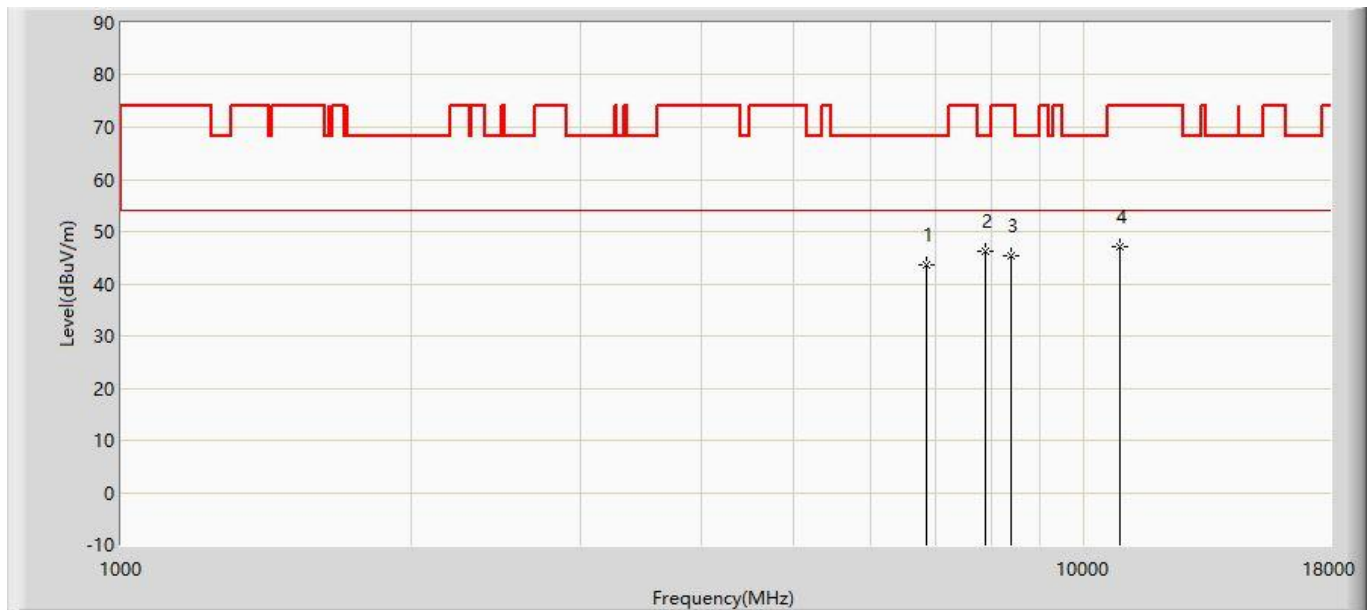


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			6865.000	43.751	33.935	-24.449	68.200	9.816	PK
2		*	7910.500	46.155	34.016	-22.045	68.200	12.138	PK
3			8403.500	45.451	33.039	-28.549	74.000	12.412	PK
4			10877.000	47.234	29.828	-26.766	74.000	17.406	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/22 - 16:30
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test: Transmit by 802.11 n-HT20 at Channel 5825MHz with OAW-AP1361D (CDD Mode)	

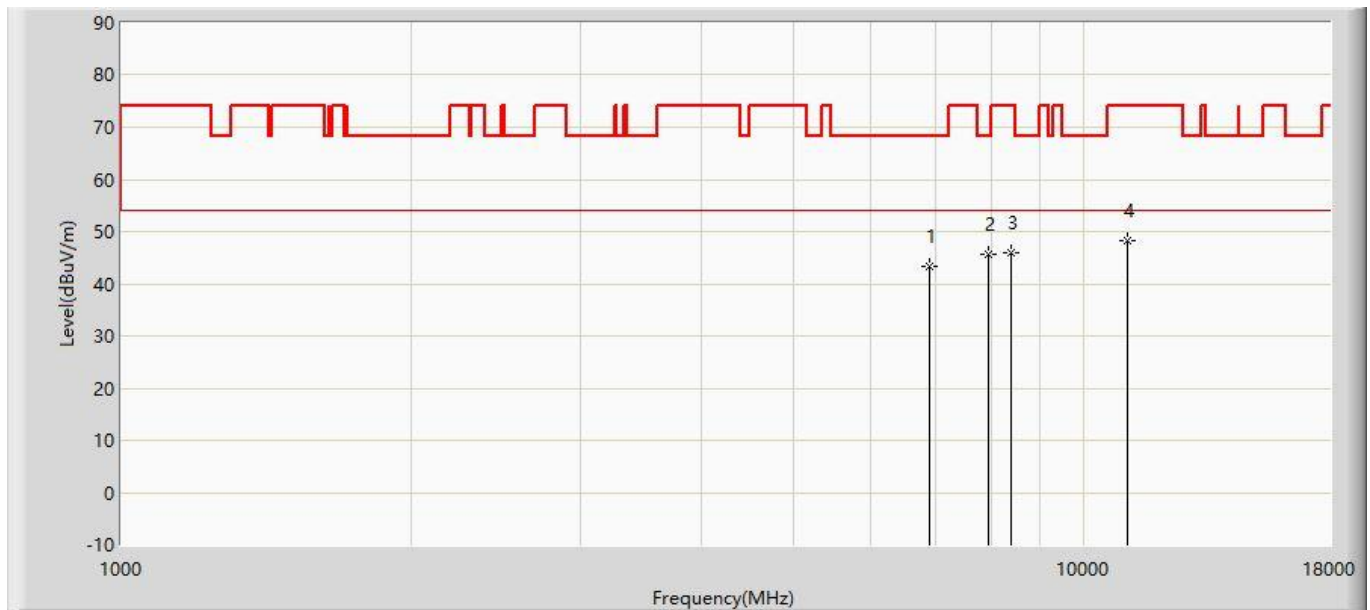


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			6899.000	43.387	33.374	-24.813	68.200	10.013	PK
2		*	7953.000	45.547	33.366	-22.653	68.200	12.181	PK
3			8412.000	46.035	33.619	-27.965	74.000	12.416	PK
4			11072.500	48.177	30.529	-25.823	74.000	17.648	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/22 - 16:30
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test: Transmit by 802.11 n-HT20 at Channel 5825MHz with OAW-AP1361D (CDD Mode)	

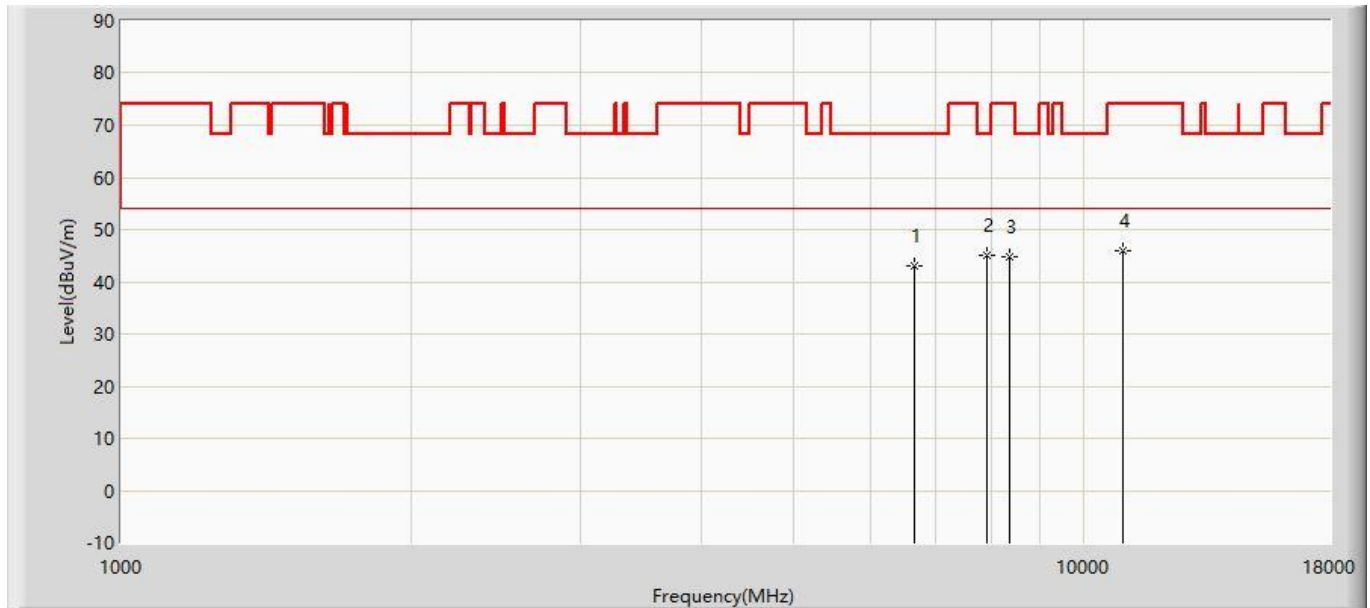


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			6669.500	42.989	34.309	-25.211	68.200	8.680	PK
2		*	7936.000	45.044	32.880	-23.156	68.200	12.164	PK
3			8378.000	44.908	32.507	-29.092	74.000	12.401	PK
4			10987.500	46.059	28.496	-27.941	74.000	17.563	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/22 - 16:31
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test: Transmit by 802.11 n-HT40 at Channel 5190MHz with OAW-AP1361D (CDD Mode)	

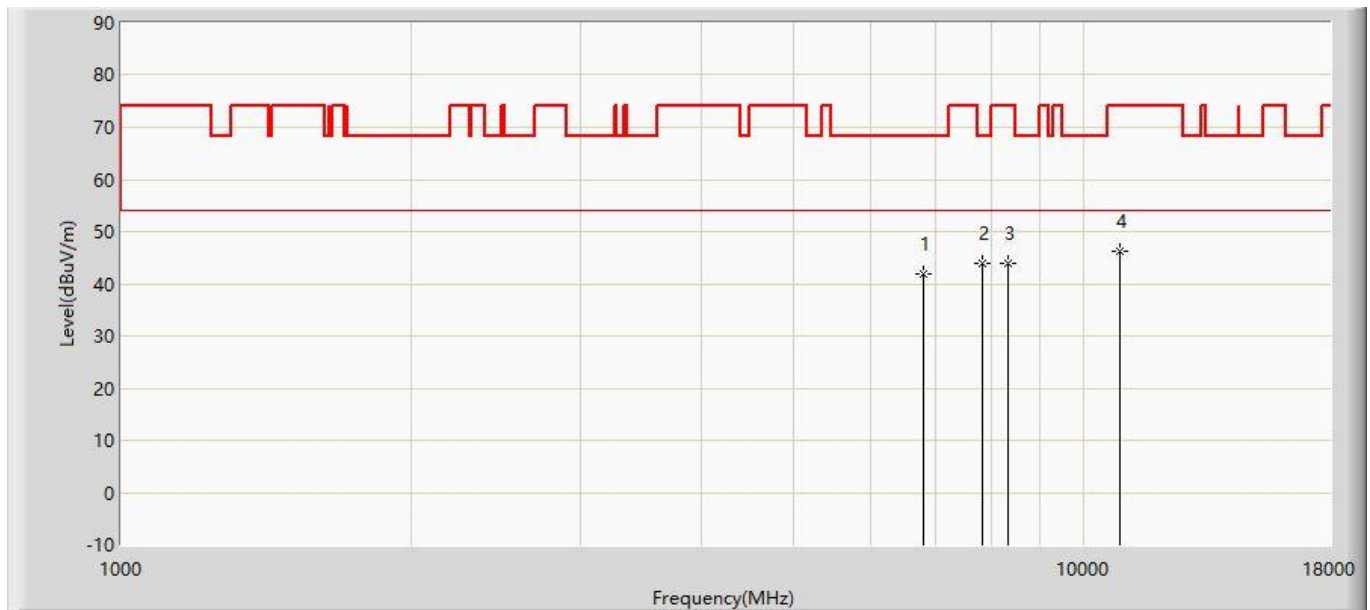

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			6814.000	41.757	32.238	-26.443	68.200	9.519	PK
2		*	7851.000	43.975	31.899	-24.225	68.200	12.076	PK
3			8352.500	43.986	31.598	-30.014	74.000	12.388	PK
4			10902.500	46.281	28.839	-27.719	74.000	17.442	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/22 - 16:32
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test: Transmit by 802.11 n-HT40 at Channel 5190MHz with OAW-AP1361D (CDD Mode)	



No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			6873.500	43.312	33.447	-24.888	68.200	9.865	PK
2		*	7910.500	44.528	32.389	-23.672	68.200	12.138	PK
3			8293.000	43.886	31.524	-30.114	74.000	12.362	PK
4			11072.500	47.294	29.646	-26.706	74.000	17.648	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/22 - 16:32
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test: Transmit by 802.11 n-HT40 at Channel 5230MHz with OAW-AP1361D (CDD Mode)	




No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			7077.500	44.516	33.744	-23.684	68.200	10.773	PK
2		*	7893.500	45.270	33.149	-22.930	68.200	12.121	PK
3			8386.500	44.397	31.993	-29.603	74.000	12.404	PK
4			10979.000	46.667	29.117	-27.333	74.000	17.550	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/22 - 16:33
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test: Transmit by 802.11 n-HT40 at Channel 5230MHz with OAW-AP1361D (CDD Mode)	

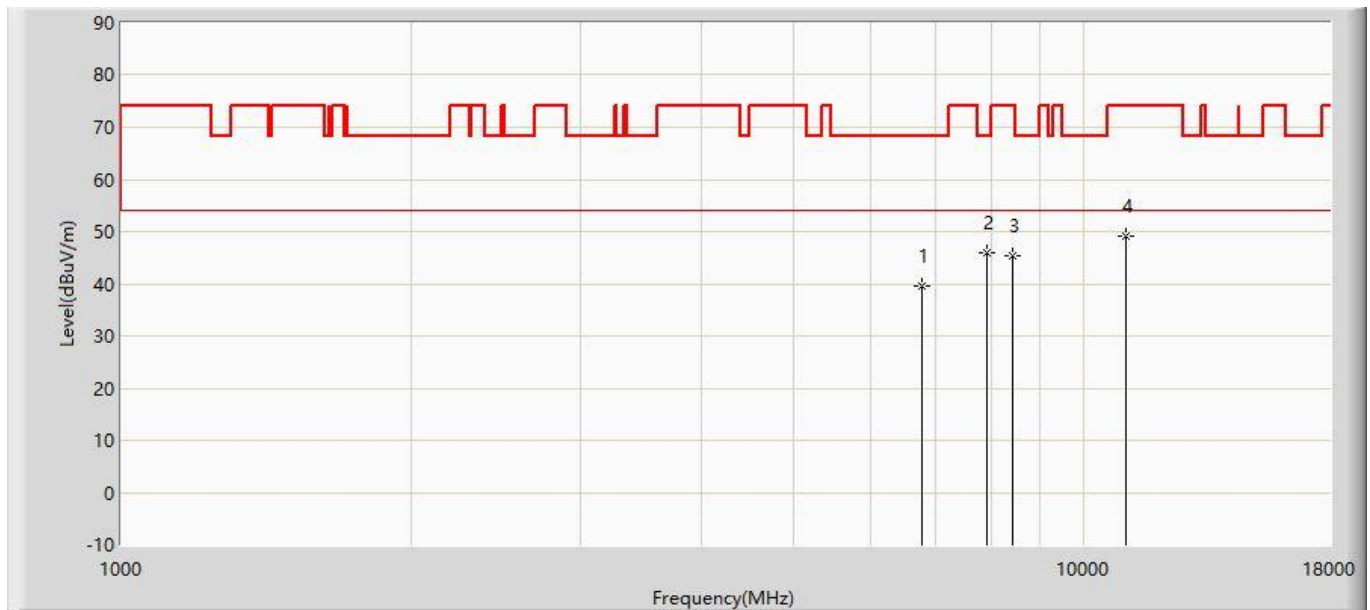


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			6780.000	39.661	30.339	-28.539	68.200	9.322	PK
2		*	7927.500	45.903	33.747	-22.297	68.200	12.155	PK
3			8429.000	45.256	32.833	-28.744	74.000	12.423	PK
4			11047.000	49.053	31.429	-24.947	74.000	17.624	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/22 - 16:33
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test: Transmit by 802.11 n-HT40 at Channel 5270MHz with OAW-AP1361D (CDD Mode)	

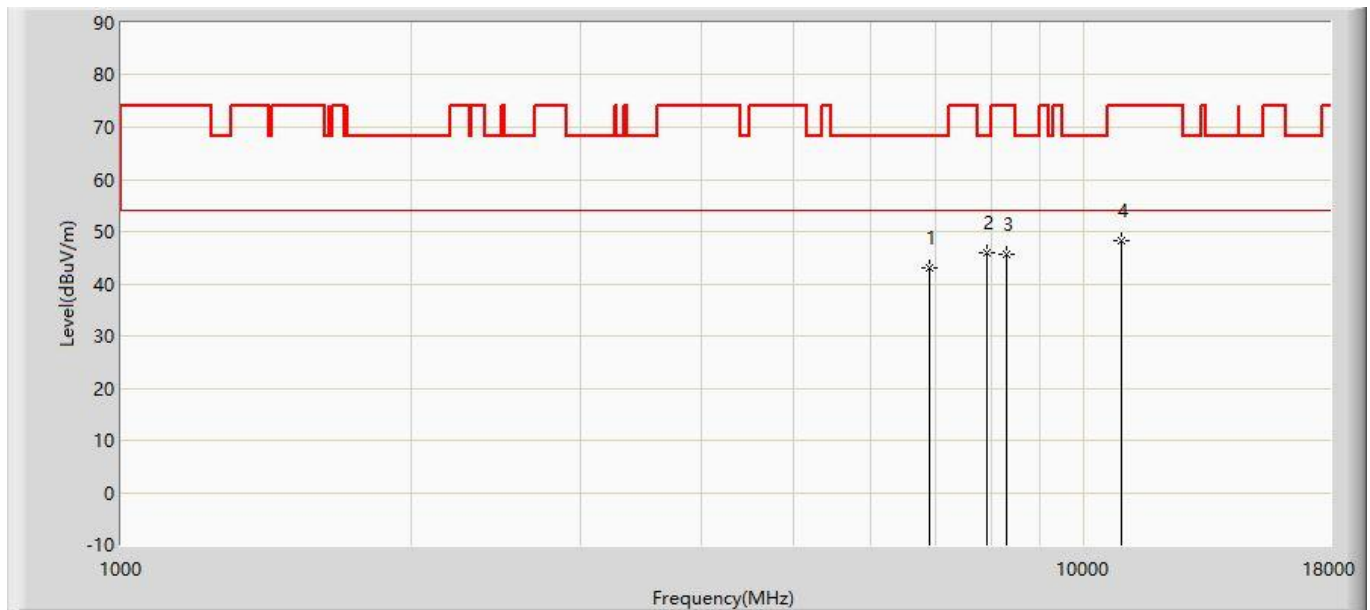

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			6907.500	43.169	33.106	-25.031	68.200	10.063	PK
2		*	7927.500	45.846	33.690	-22.354	68.200	12.155	PK
3			8293.000	45.762	33.400	-28.238	74.000	12.362	PK
4			10928.000	48.208	30.731	-25.792	74.000	17.477	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/22 - 16:34
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test: Transmit by 802.11 n-HT40 at Channel 5270MHz with OAW-AP1361D (CDD Mode)	




No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	6890.500	44.622	34.658	-23.578	68.200	9.964	PK
2			7876.500	44.459	32.356	-23.741	68.200	12.104	PK
3			8403.500	44.015	31.603	-29.985	74.000	12.412	PK
4			11030.000	49.116	31.508	-24.884	74.000	17.608	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/22 - 16:35
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test: Transmit by 802.11 n-HT40 at Channel 5310MHz with OAW-AP1361D (CDD Mode)	

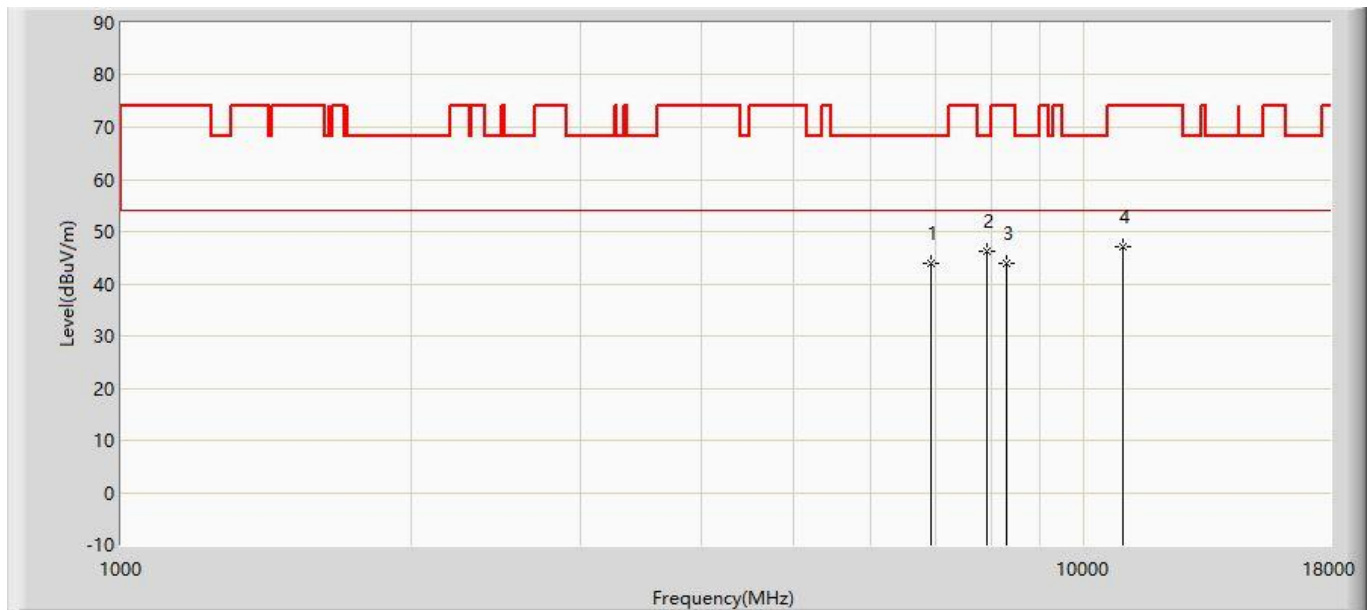


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			6924.500	44.042	33.881	-24.158	68.200	10.161	PK
2		*	7927.500	46.101	33.945	-22.099	68.200	12.155	PK
3			8310.000	43.963	31.594	-30.037	74.000	12.369	PK
4			10979.000	47.029	29.479	-26.971	74.000	17.550	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/22 - 16:35
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test: Transmit by 802.11 n-HT40 at Channel 5310MHz with OAW-AP1361D (CDD Mode)	

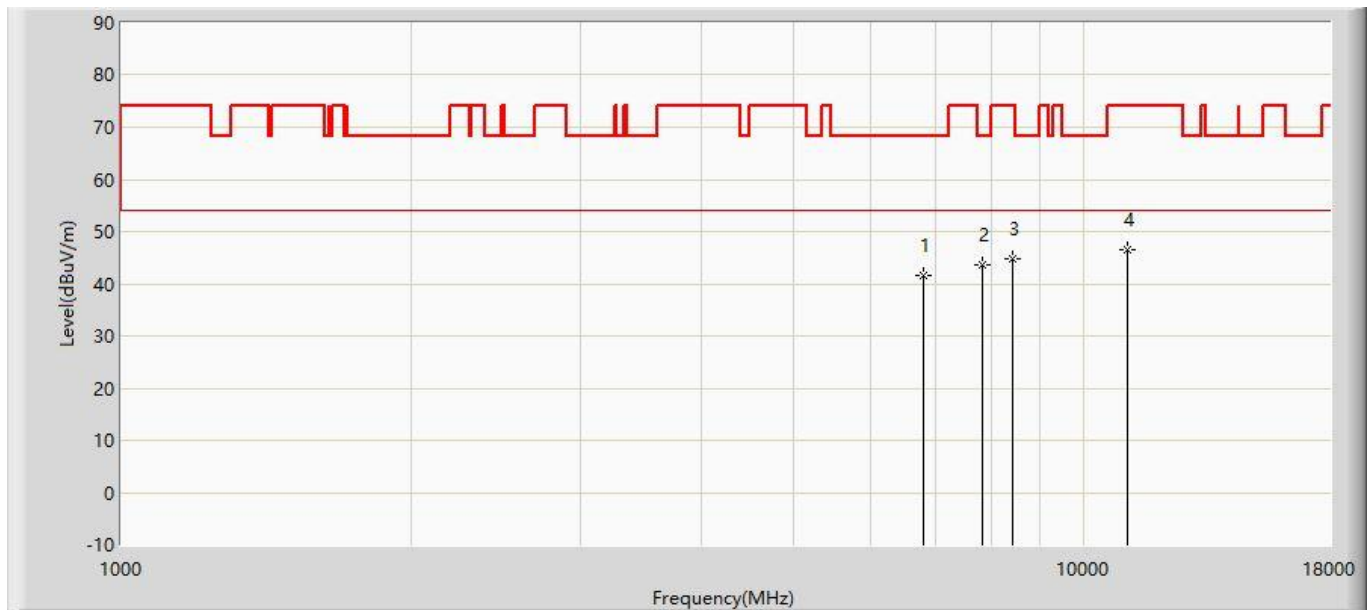


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			6822.500	41.557	31.988	-26.643	68.200	9.569	PK
2		*	7851.000	43.759	31.683	-24.441	68.200	12.076	PK
3			8420.500	44.914	32.495	-29.086	74.000	12.419	PK
4			11089.500	46.596	28.932	-27.404	74.000	17.665	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/22 - 16:36
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test: Transmit by 802.11 n-HT40 at Channel 5510MHz with OAW-AP1361D (CDD Mode)	

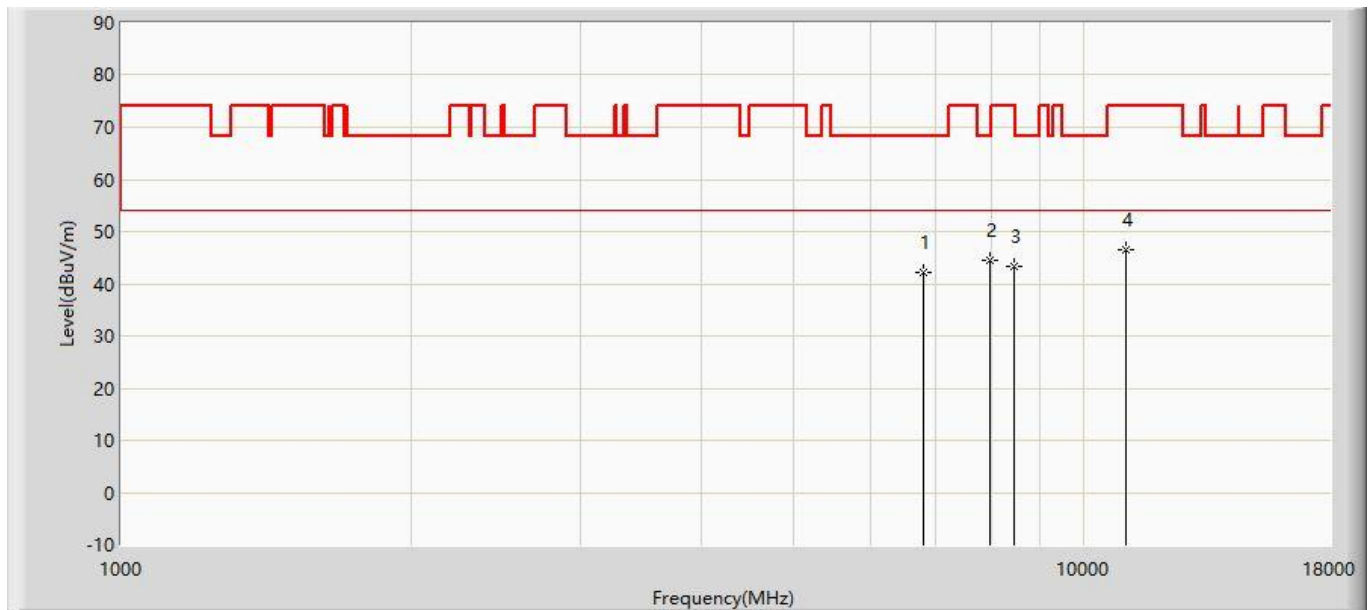


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			6814.000	42.264	32.745	-25.936	68.200	9.519	PK
2		*	7987.000	44.636	32.419	-23.564	68.200	12.217	PK
3			8454.500	43.402	30.967	-30.598	74.000	12.435	PK
4			11064.000	46.663	29.022	-27.337	74.000	17.641	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/22 - 16:36
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test: Transmit by 802.11 n-HT40 at Channel 5510MHz with OAW-AP1361D (CDD Mode)	

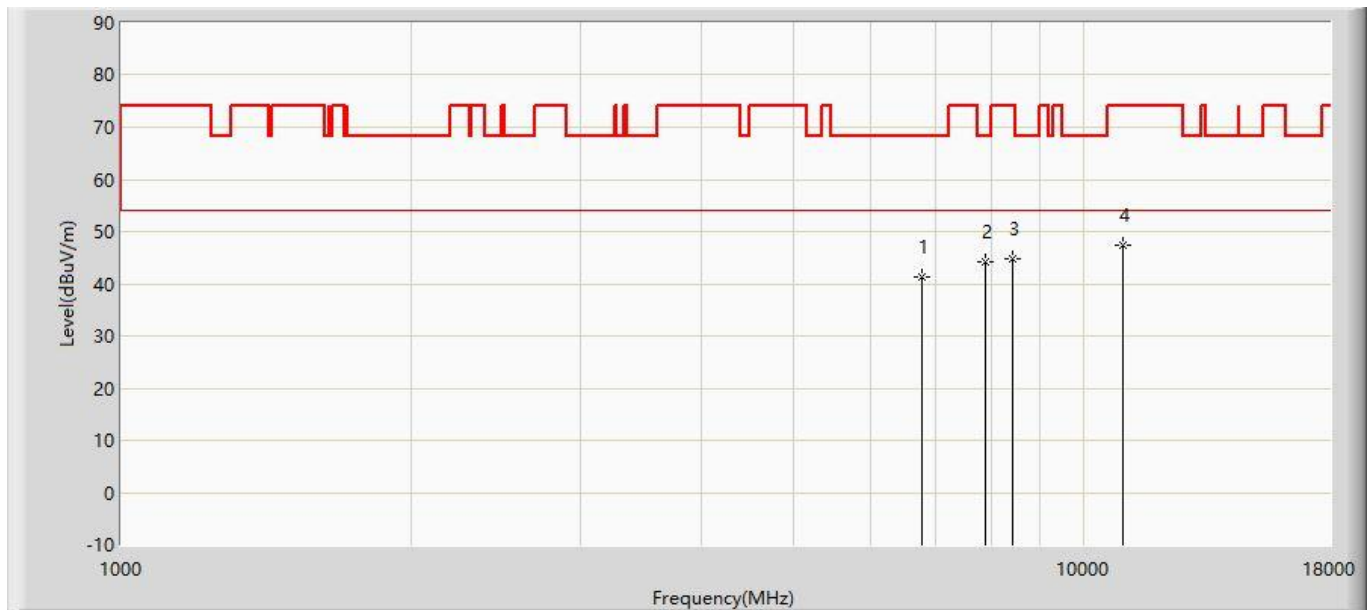


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			6797.000	41.314	31.893	-26.886	68.200	9.421	PK
2		*	7902.000	44.178	32.048	-24.022	68.200	12.130	PK
3			8429.000	44.763	32.340	-29.237	74.000	12.423	PK
4			10987.500	47.480	29.917	-26.520	74.000	17.563	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/22 - 16:37
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test: Transmit by 802.11 n-HT40 at Channel 5590MHz with OAW-AP1361D (CDD Mode)	

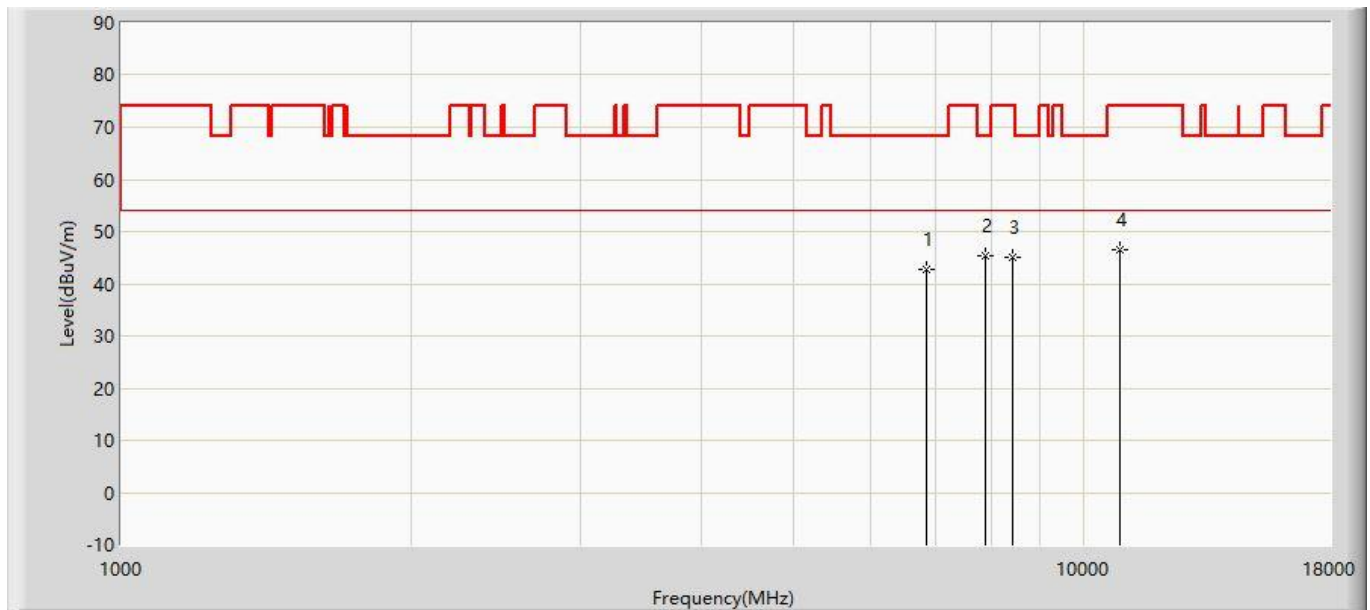


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			6865.000	42.627	32.811	-25.573	68.200	9.816	PK
2		*	7885.000	45.355	33.243	-22.845	68.200	12.112	PK
3			8420.500	45.156	32.737	-28.844	74.000	12.419	PK
4			10885.500	46.634	29.216	-27.366	74.000	17.417	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/22 - 16:37
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test: Transmit by 802.11 n-HT40 at Channel 5590MHz with OAW-AP1361D (CDD Mode)	

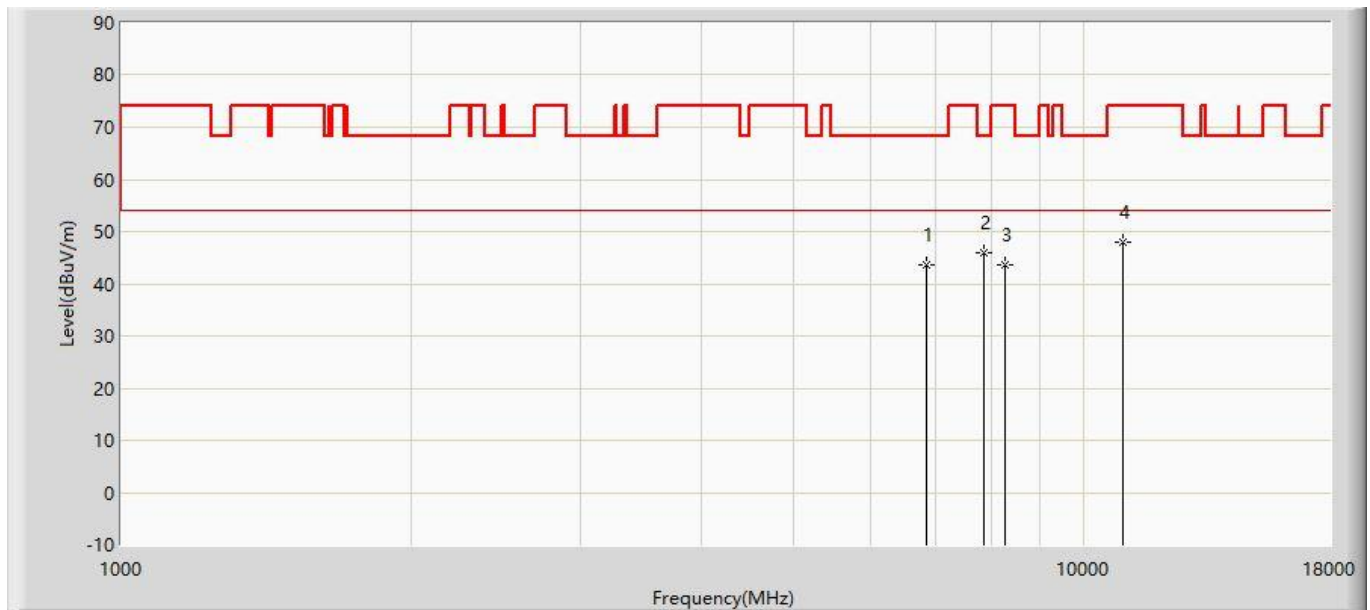


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			6865.000	43.696	33.880	-24.504	68.200	9.816	PK
2		*	7876.500	45.939	33.836	-22.261	68.200	12.104	PK
3			8276.000	43.744	31.390	-30.256	74.000	12.354	PK
4			10987.500	47.927	30.364	-26.073	74.000	17.563	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/22 - 16:37
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test: Transmit by 802.11 n-HT40 at Channel 5670MHz with OAW-AP1361D (CDD Mode)	

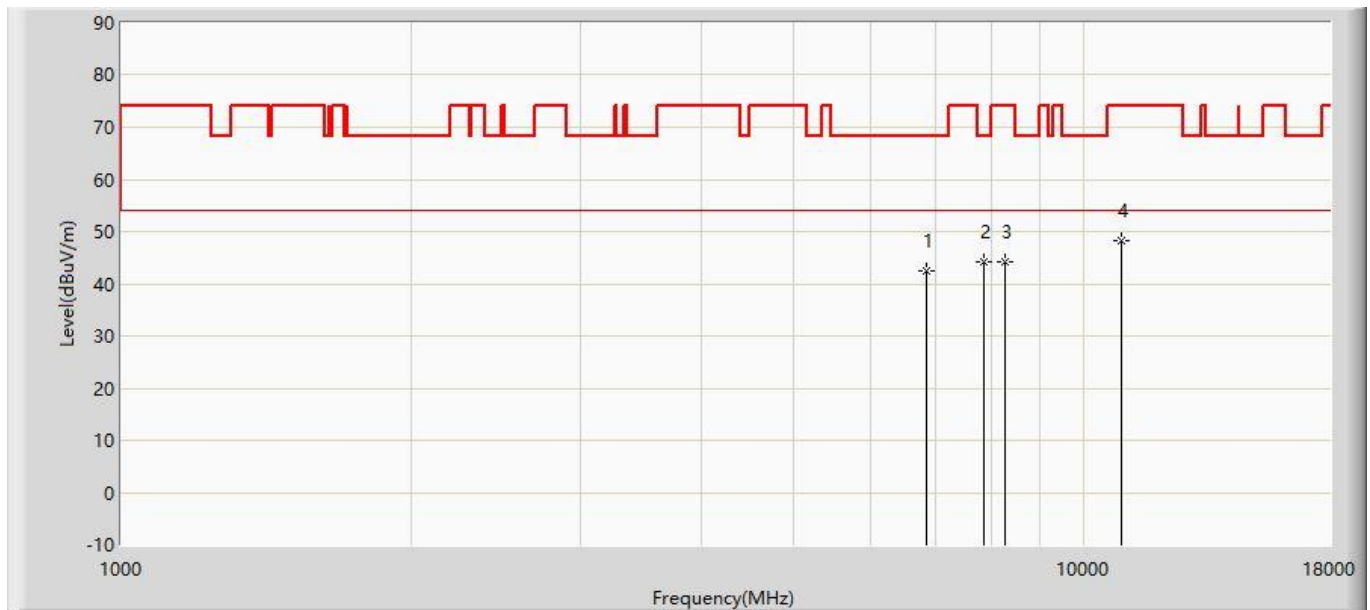


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			6848.000	42.384	32.667	-25.816	68.200	9.717	PK
2		*	7876.500	44.113	32.010	-24.087	68.200	12.104	PK
3			8276.000	44.252	31.898	-29.748	74.000	12.354	PK
4			10936.500	48.377	30.888	-25.623	74.000	17.489	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/22 - 16:38
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test: Transmit by 802.11 n-HT40 at Channel 5670MHz with OAW-AP1361D (CDD Mode)	

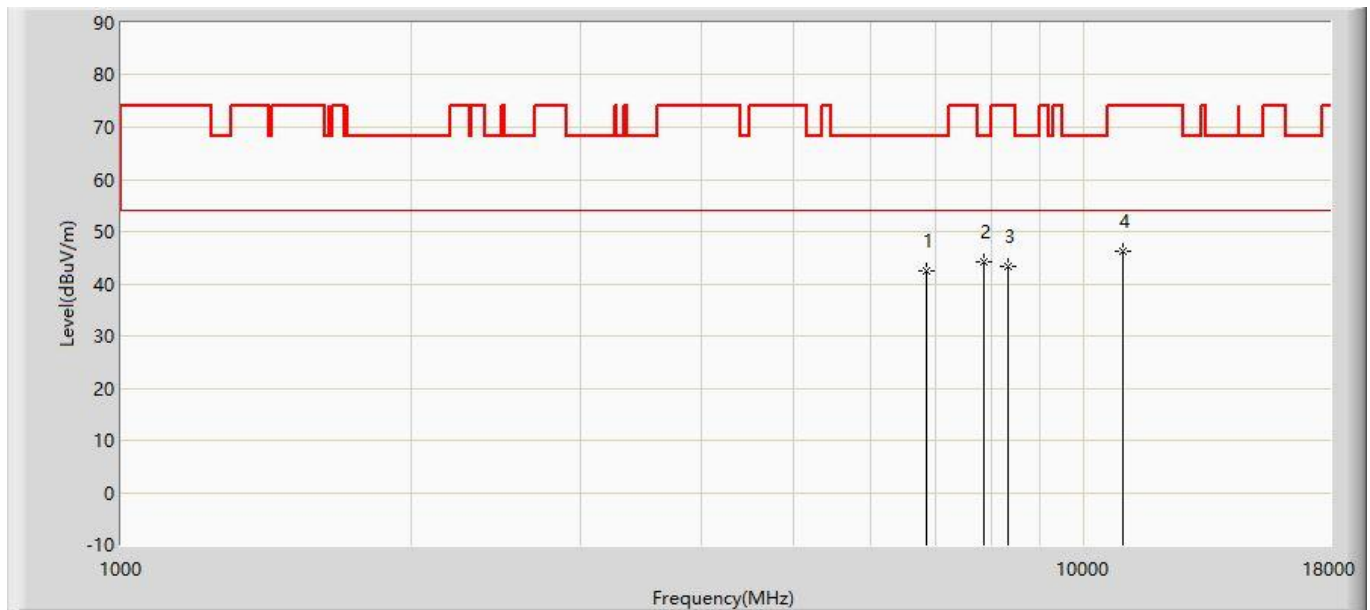


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			6848.000	42.440	32.723	-25.760	68.200	9.717	PK
2		*	7868.000	44.075	31.981	-24.125	68.200	12.094	PK
3			8352.500	43.399	31.011	-30.601	74.000	12.388	PK
4			10970.500	46.241	28.703	-27.759	74.000	17.538	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/22 - 16:38
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test: Transmit by 802.11 n-HT40 at Channel 5710MHz with OAW-AP1361D (CDD Mode)	

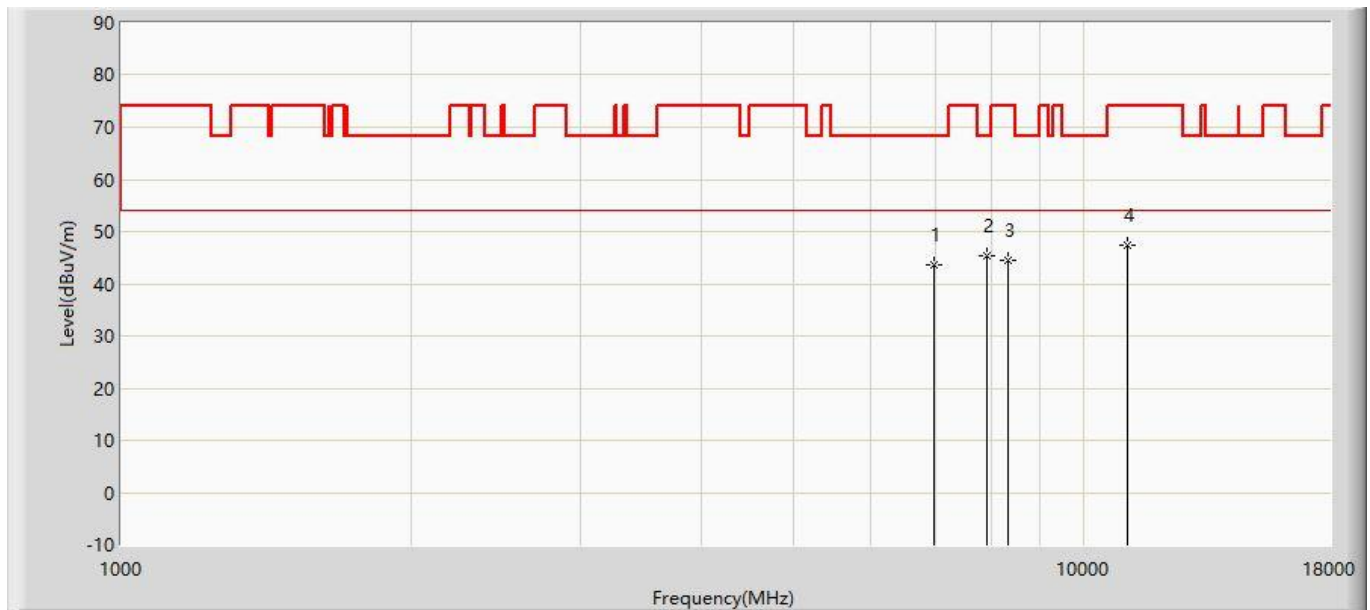


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			6984.000	43.674	33.167	-24.526	68.200	10.507	PK
2		*	7936.000	45.275	33.111	-22.925	68.200	12.164	PK
3			8344.000	44.535	32.151	-29.465	74.000	12.384	PK
4			11072.500	47.306	29.658	-26.694	74.000	17.648	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/22 - 16:39
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test: Transmit by 802.11 n-HT40 at Channel 5710MHz with OAW-AP1361D (CDD Mode)	

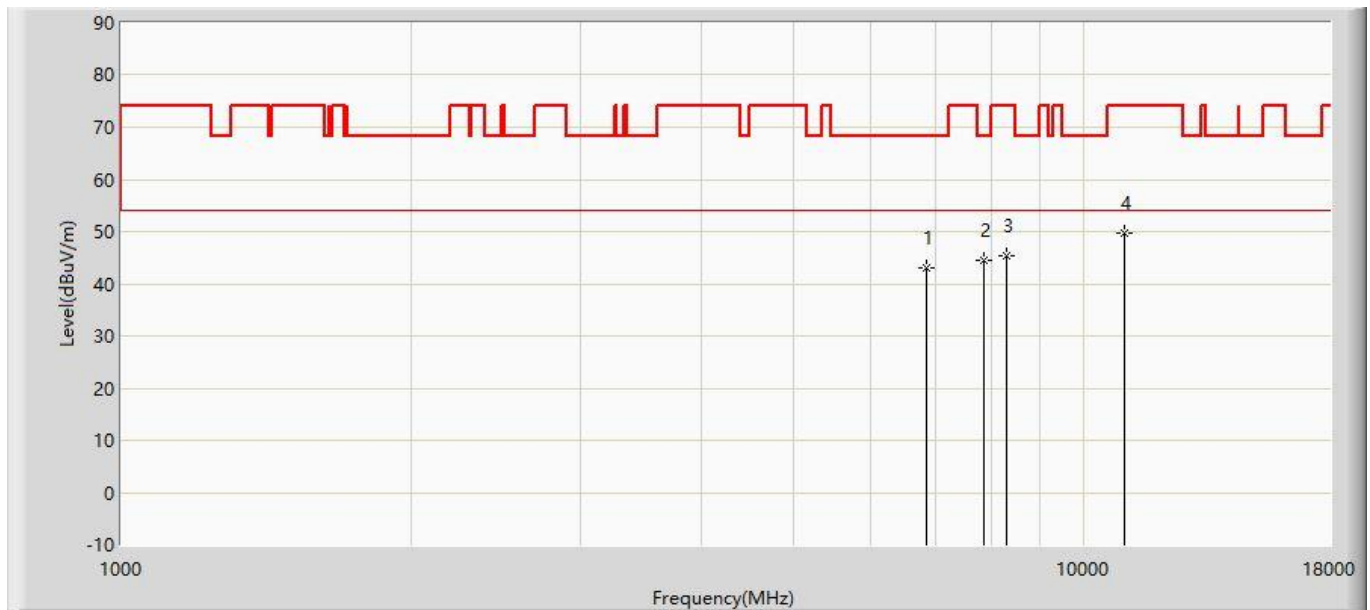


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			6856.500	42.963	33.197	-25.237	68.200	9.766	PK
2		*	7859.500	44.513	32.428	-23.687	68.200	12.086	PK
3			8301.500	45.386	33.020	-28.614	74.000	12.366	PK
4			11021.500	49.576	31.976	-24.424	74.000	17.600	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/22 - 16:40
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test: Transmit by 802.11 n-HT40 at Channel 5755MHz with OAW-AP1361D (CDD Mode)	

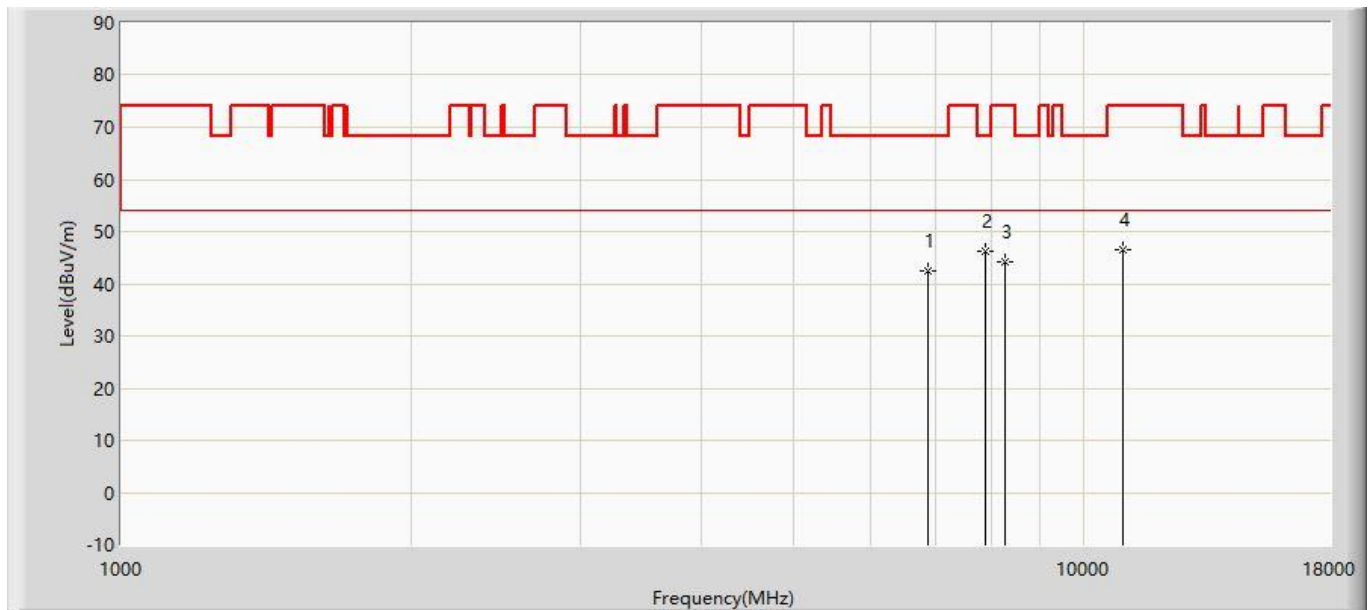


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			6890.500	42.396	32.432	-25.804	68.200	9.964	PK
2		*	7893.500	46.334	34.213	-21.866	68.200	12.121	PK
3			8276.000	44.276	31.922	-29.724	74.000	12.354	PK
4			10979.000	46.495	28.945	-27.505	74.000	17.550	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/22 - 16:40
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test: Transmit by 802.11 n-HT40 at Channel 5755MHz with OAW-AP1361D (CDD Mode)	

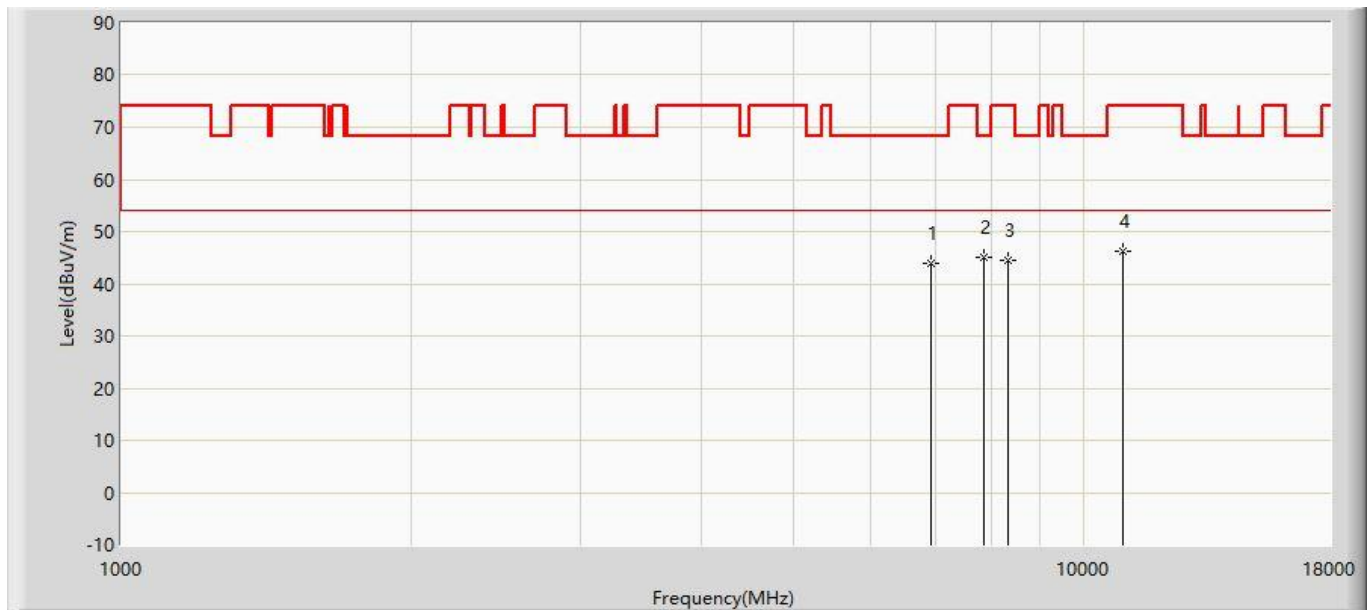


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			6924.500	43.984	33.823	-24.216	68.200	10.161	PK
2		*	7876.500	45.102	32.999	-23.098	68.200	12.104	PK
3			8335.500	44.620	32.239	-29.380	74.000	12.381	PK
4			10987.500	46.354	28.791	-27.646	74.000	17.563	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/22 - 16:41
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test: Transmit by 802.11 n-HT40 at Channel 5795MHz with OAW-AP1361D (CDD Mode)	

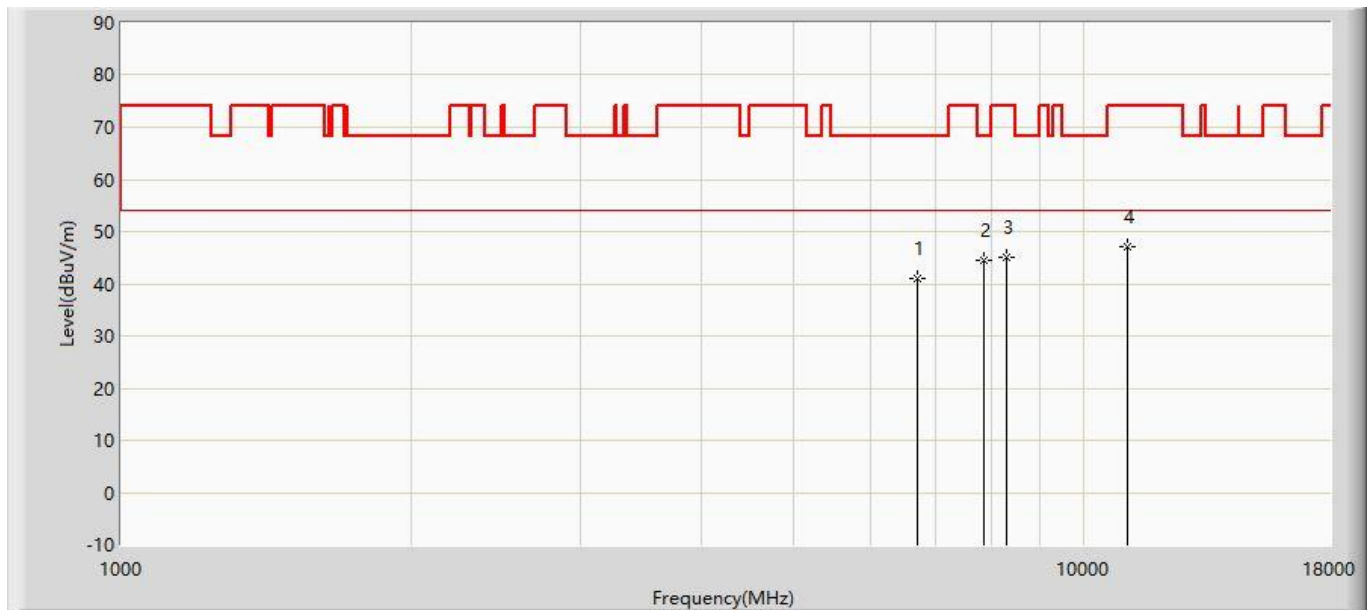


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			6703.500	40.916	32.039	-27.284	68.200	8.878	PK
2		*	7859.500	44.562	32.477	-23.638	68.200	12.086	PK
3			8310.000	44.969	32.600	-29.031	74.000	12.369	PK
4			11072.500	47.105	29.457	-26.895	74.000	17.648	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/22 - 16:41
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test: Transmit by 802.11 n-HT40 at Channel 5795MHz with OAW-AP1361D (CDD Mode)	

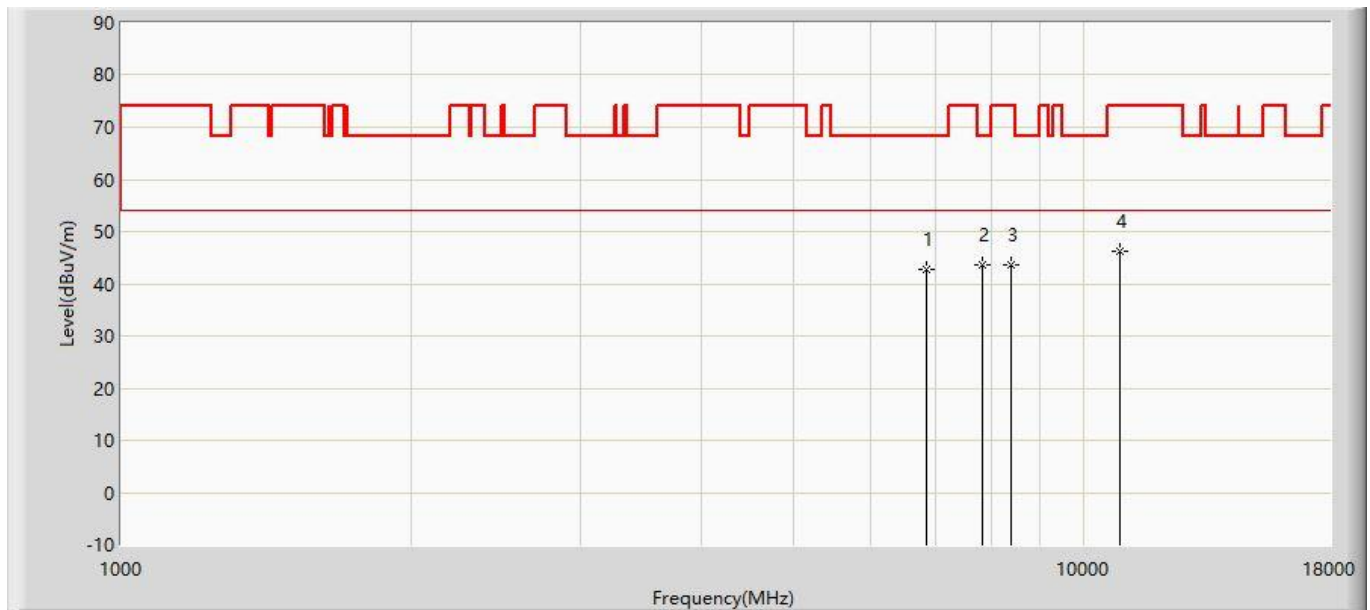


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			6856.500	42.701	32.935	-25.499	68.200	9.766	PK
2		*	7842.500	43.671	31.603	-24.529	68.200	12.067	PK
3			8386.500	43.722	31.318	-30.278	74.000	12.404	PK
4			10894.000	46.222	28.793	-27.778	74.000	17.429	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/22 - 16:42
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test: Transmit by 802.11 ax-VHT20 at Channel 5180MHz with OAW-AP1361D (CDD Mode)	

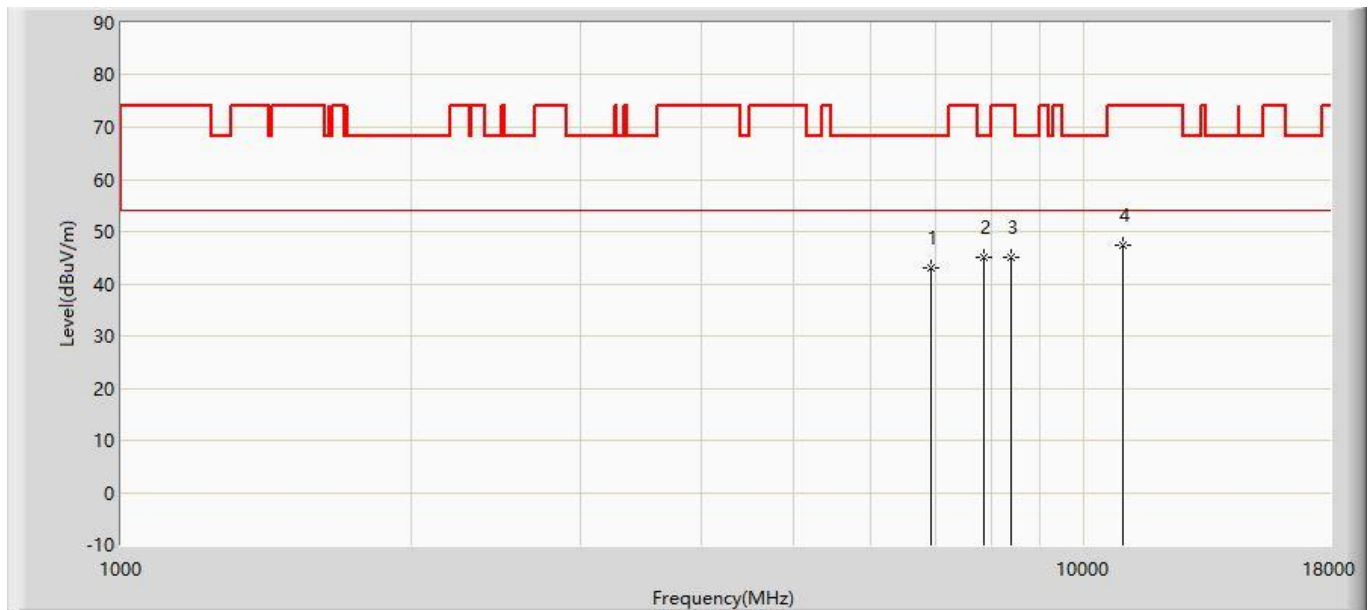


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			6933.000	43.166	32.956	-25.034	68.200	10.210	PK
2		*	7876.500	44.977	32.874	-23.223	68.200	12.104	PK
3			8395.000	45.162	32.754	-28.838	74.000	12.408	PK
4			10987.500	47.308	29.745	-26.692	74.000	17.563	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/22 - 16:43
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test: Transmit by 802.11 ax-VHT20 at Channel 5180MHz with OAW-AP1361D (CDD Mode)	

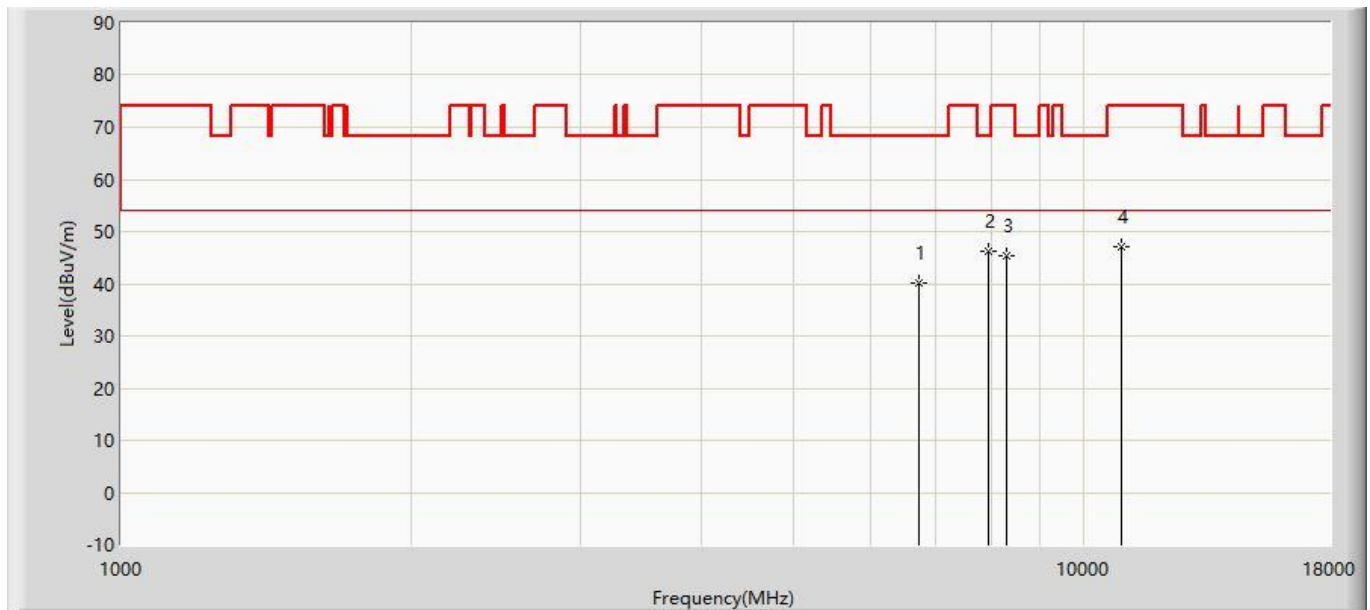


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			6729.000	40.087	31.062	-28.113	68.200	9.025	PK
2		*	7944.500	46.329	34.156	-21.871	68.200	12.172	PK
3			8293.000	45.505	33.143	-28.495	74.000	12.362	PK
4			10928.000	47.228	29.751	-26.772	74.000	17.477	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/22 - 16:43
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test: Transmit by 802.11 ax-VHT20 at Channel 5220MHz with OAW-AP1361D (CDD Mode)	

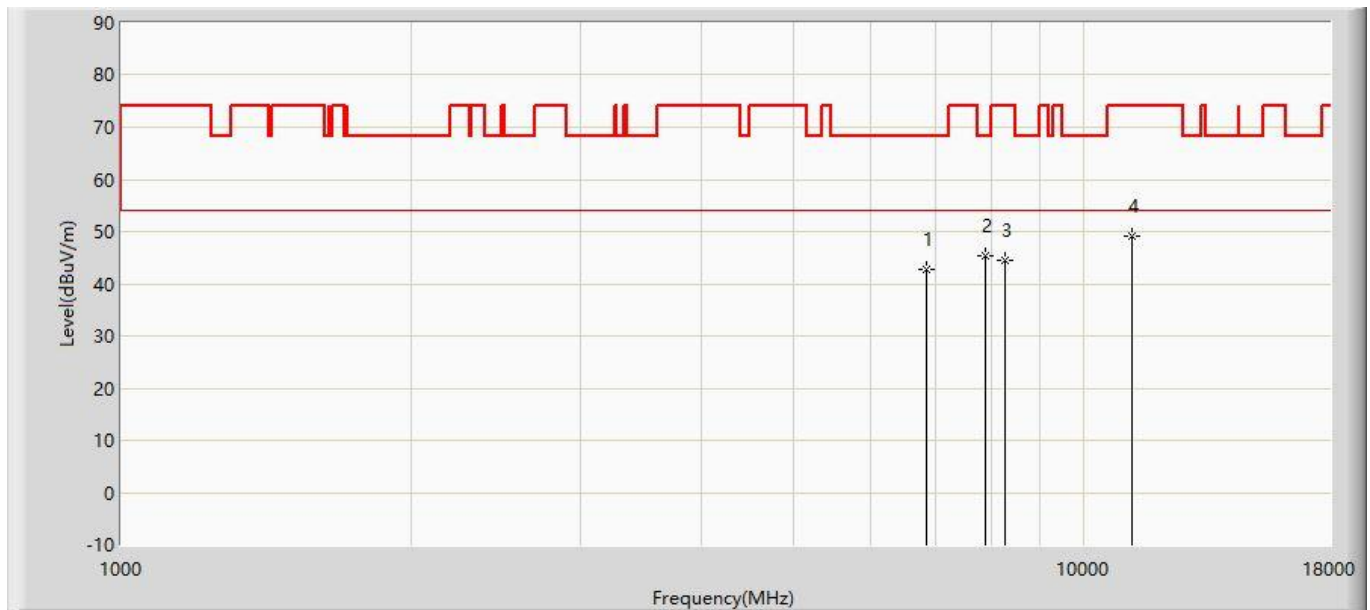


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			6856.500	42.760	32.994	-25.440	68.200	9.766	PK
2		*	7885.000	45.396	33.284	-22.804	68.200	12.112	PK
3			8276.000	44.550	32.196	-29.450	74.000	12.354	PK
4			11200.000	49.242	31.474	-24.758	74.000	17.768	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/22 - 16:44
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test: Transmit by 802.11 ax-VHT20 at Channel 5220MHz with OAW-AP1361D (CDD Mode)	

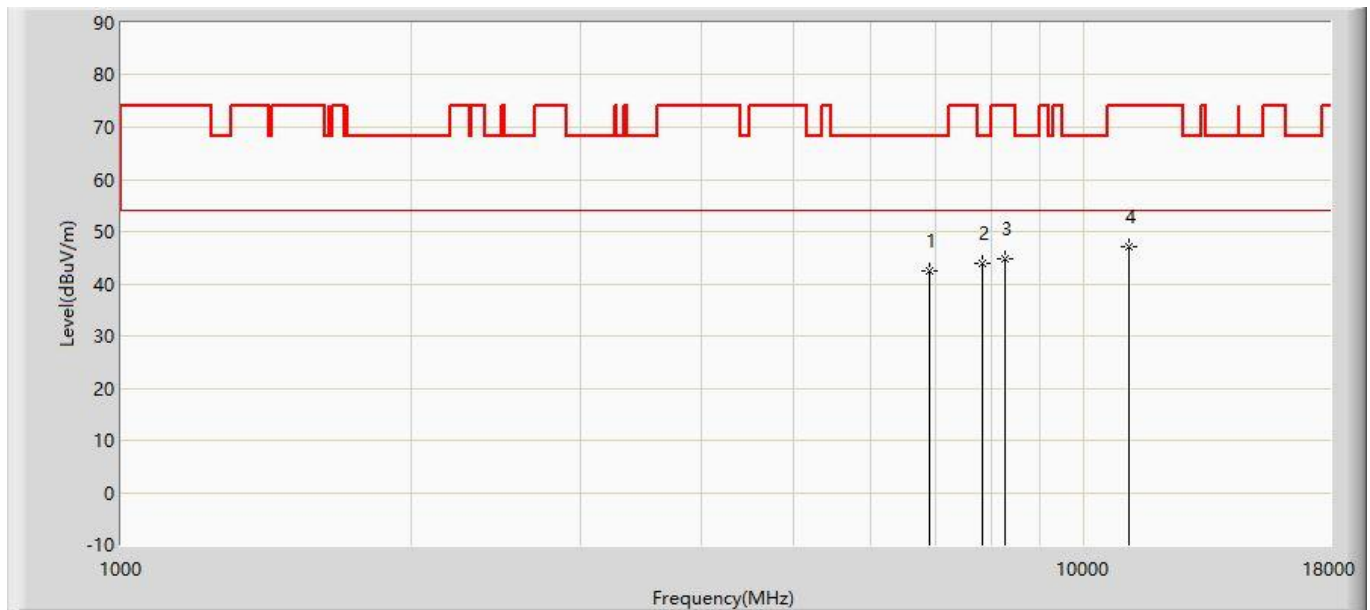

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			6916.000	42.411	32.299	-25.789	68.200	10.112	PK
2		*	7851.000	43.864	31.788	-24.336	68.200	12.076	PK
3			8276.000	44.922	32.568	-29.078	74.000	12.354	PK
4			11123.500	47.183	29.487	-26.817	74.000	17.696	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).