


Site: AC1	Time: 2019/07/11 - 22:02
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D	Polarity: Vertical
EUT: Aruba 500 接入點	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at channel 5700MHz Ant 0 + 1	

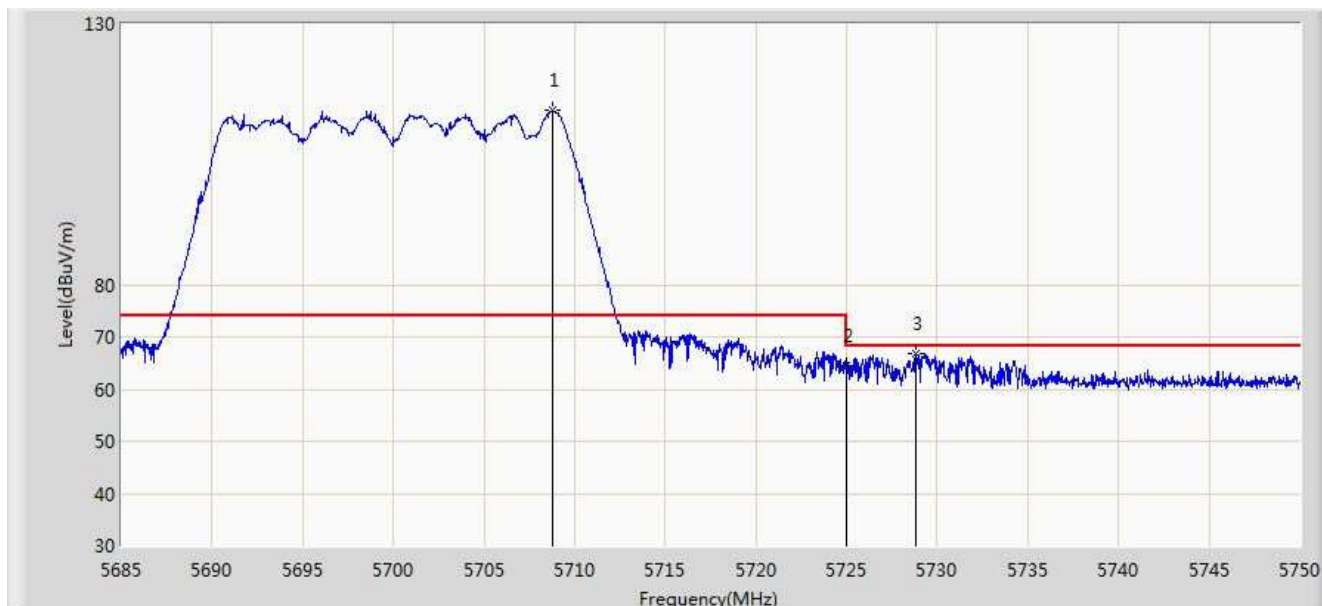


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5708.757	113.438	108.466	N/A	N/A	4.972	PK
2			5725.000	64.463	59.429	-3.737	68.200	5.034	PK
3			5728.842	66.954	61.905	-1.246	68.200	5.049	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2019/07/11 - 22:06
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D	Polarity: Horizontal
EUT: Aruba 500 接入點	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at channel 5745MHz Ant 0 + 1	

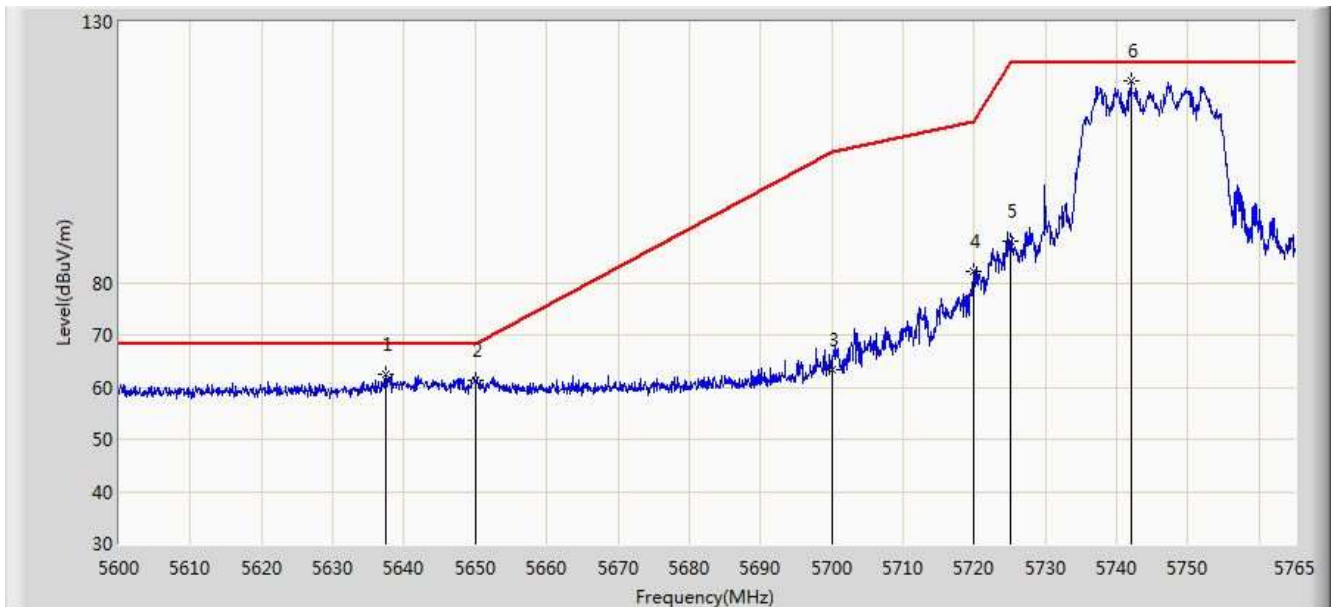


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5637.455	62.606	57.908	-5.594	68.200	4.699	PK
2			5650.000	61.204	56.458	-6.996	68.200	4.746	PK
3			5700.000	63.471	58.533	-41.729	105.200	4.938	PK
4			5720.000	82.237	77.222	-28.563	110.800	5.015	PK
5			5725.000	87.947	82.913	-34.253	122.200	5.034	PK
6		*	5741.982	118.556	113.457	N/A	N/A	5.099	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2019/07/11 - 22:04
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D	Polarity: Vertical
EUT: Aruba 500 接入點	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at channel 5745MHz Ant 0 + 1	

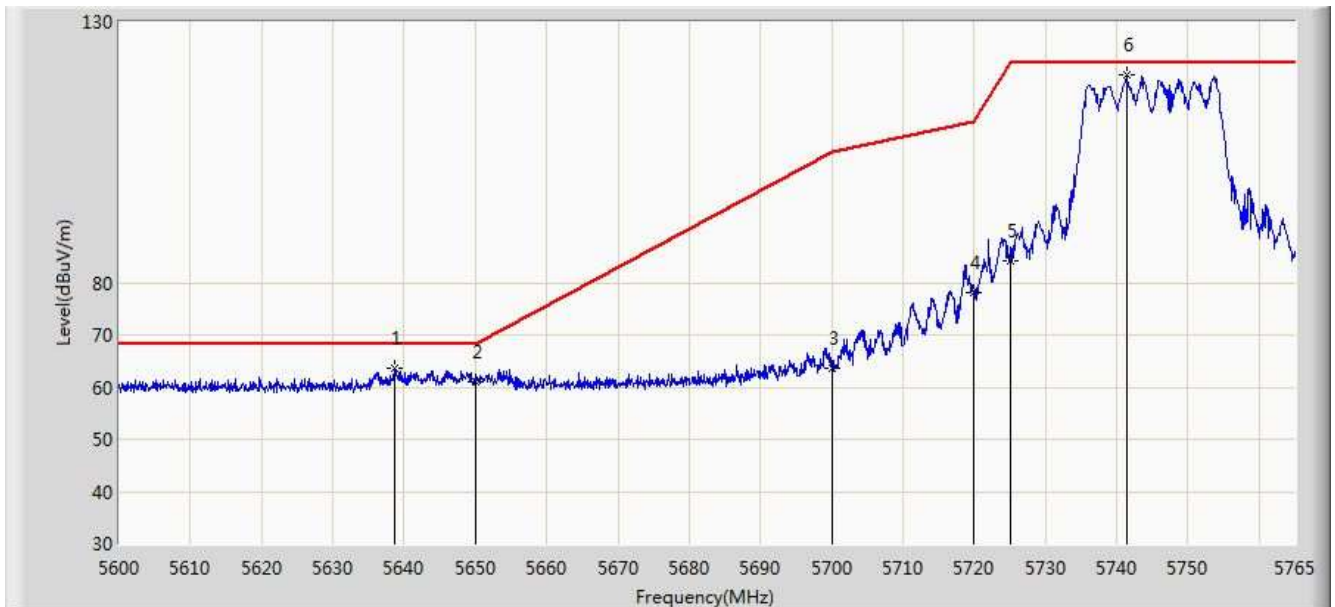


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5638.692	63.719	59.016	-4.481	68.200	4.703	PK
2			5650.000	60.953	56.207	-7.247	68.200	4.746	PK
3			5700.000	63.640	58.702	-41.560	105.200	4.938	PK
4			5720.000	78.189	73.174	-32.611	110.800	5.015	PK
5			5725.000	84.242	79.208	-37.958	122.200	5.034	PK
6		*	5741.405	119.906	114.809	-2.294	N/A	N/A	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2019/07/11 - 22:09
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D	Polarity: Horizontal
EUT: Aruba 500 接入點	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at channel 5825MHz Ant 0 + 1	

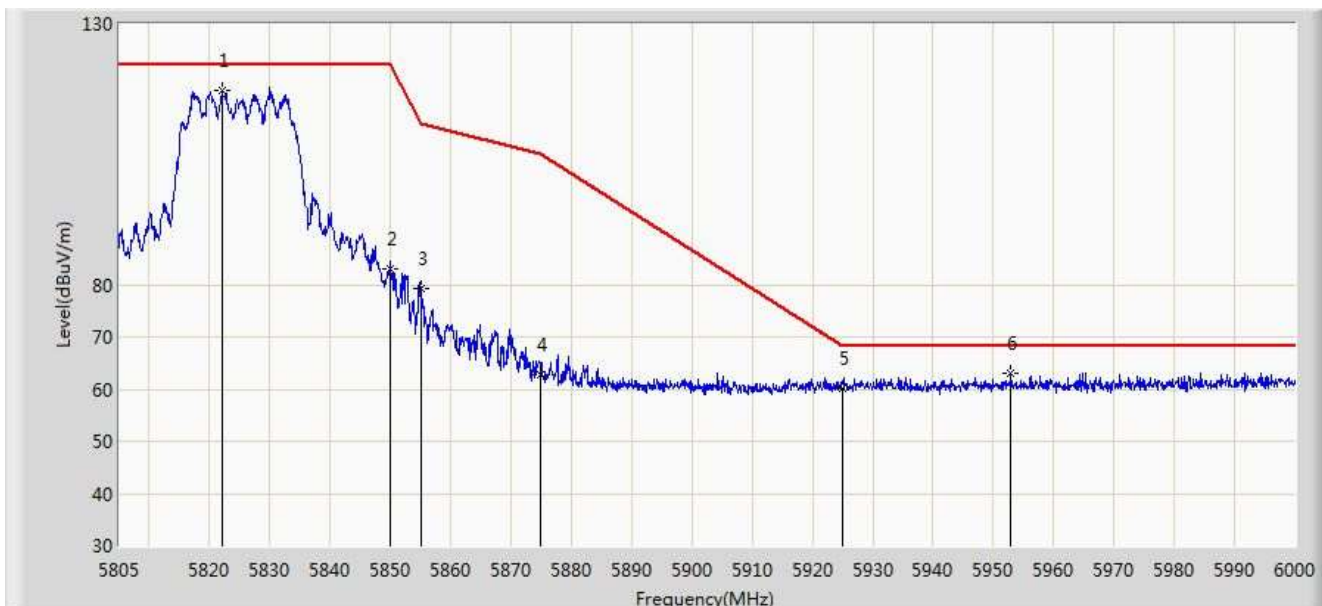


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5822.062	117.140	111.733	N/A	N/A	5.408	PK
2			5850.000	82.908	77.394	-39.292	122.200	5.514	PK
3			5855.000	79.356	73.823	-31.444	110.800	5.533	PK
4			5875.000	62.801	57.191	-42.399	105.200	5.610	PK
5			5925.000	60.025	54.223	-8.175	68.200	5.802	PK
6			5952.908	63.049	57.140	-5.151	68.200	5.909	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2019/07/11 - 22:08
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D	Polarity: Vertical
EUT: Aruba 500 接入點	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at channel 5825MHz Ant 0 + 1	

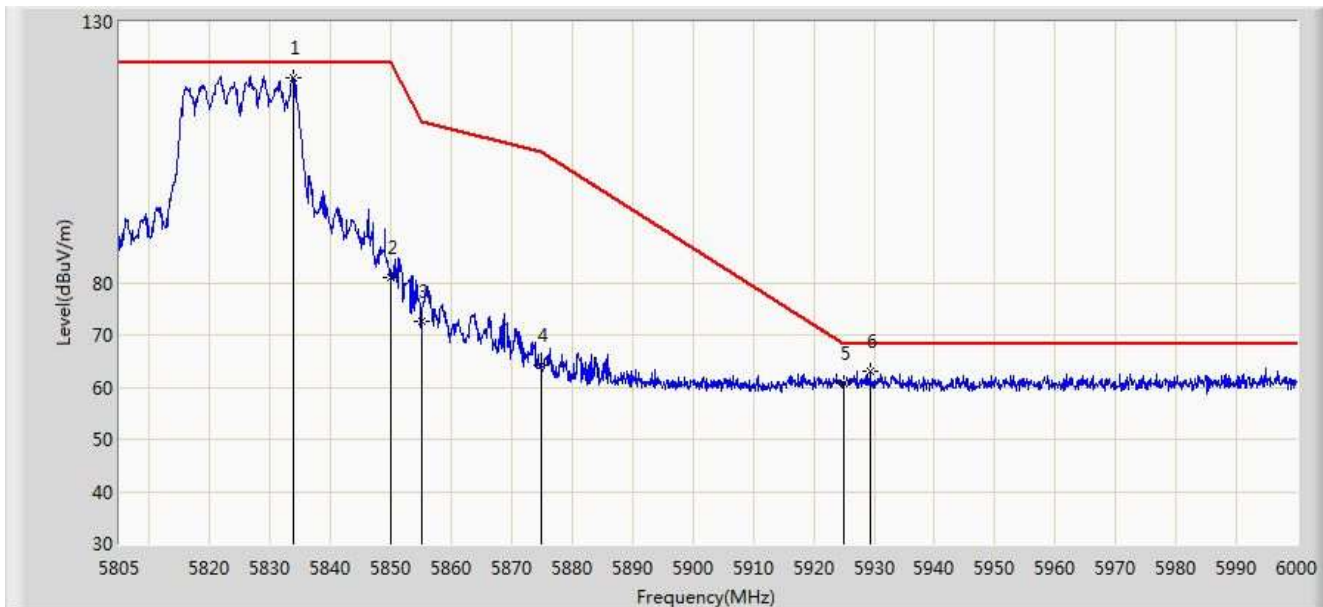


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5833.763	119.298	113.846	N/A	N/A	5.452	PK
2			5850.000	81.140	75.626	-41.060	122.200	5.514	PK
3			5855.000	72.714	67.181	-38.086	110.800	5.533	PK
4			5875.000	64.327	58.717	-40.873	105.200	5.610	PK
5			5925.000	60.637	54.835	-7.563	68.200	5.802	PK
6			5929.312	62.947	57.129	-5.253	68.200	5.818	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2019/07/16 - 23:24
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D	Polarity: Horizontal
EUT: Aruba 500 接入點	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at Channel 5190MHz Ant 0 + 1	

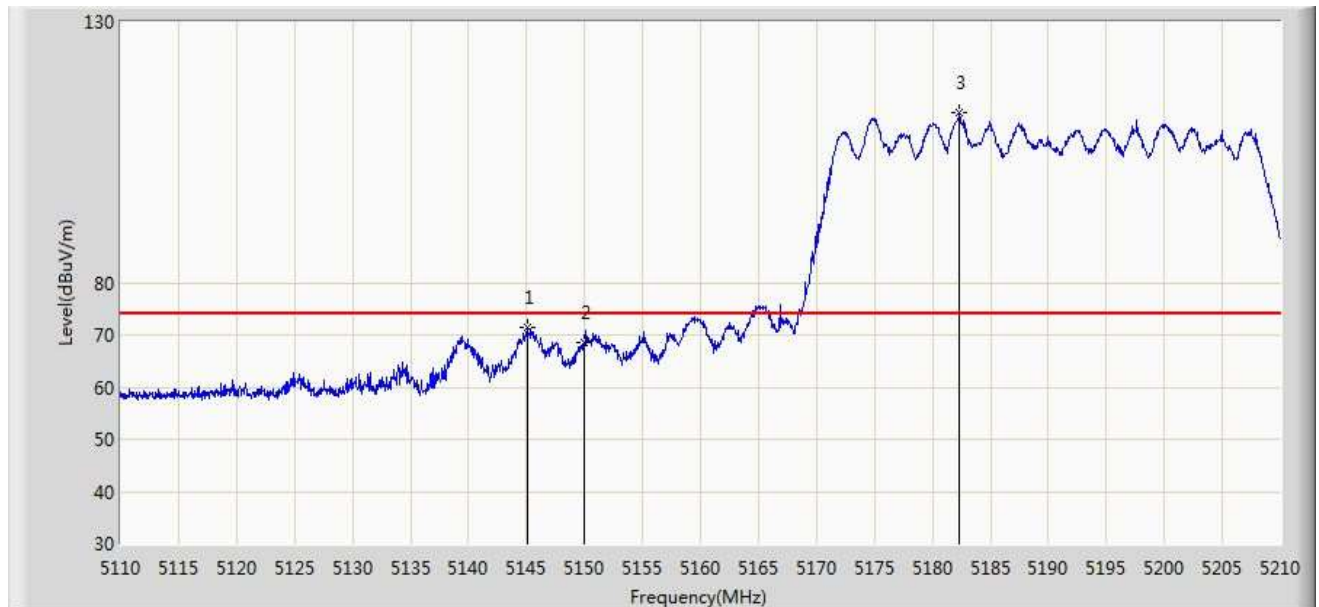


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5145.100	71.445	67.573	-2.555	74.000	3.872	PK
2			5150.000	68.523	64.647	-5.477	74.000	3.876	PK
3		*	5182.300	112.535	108.632	N/A	N/A	3.903	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB) .

Site: AC1	Time: 2019/07/16 - 23:25
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D	Polarity: Horizontal
EUT: Aruba 500 接入點	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at Channel 5190MHz Ant 0 + 1	

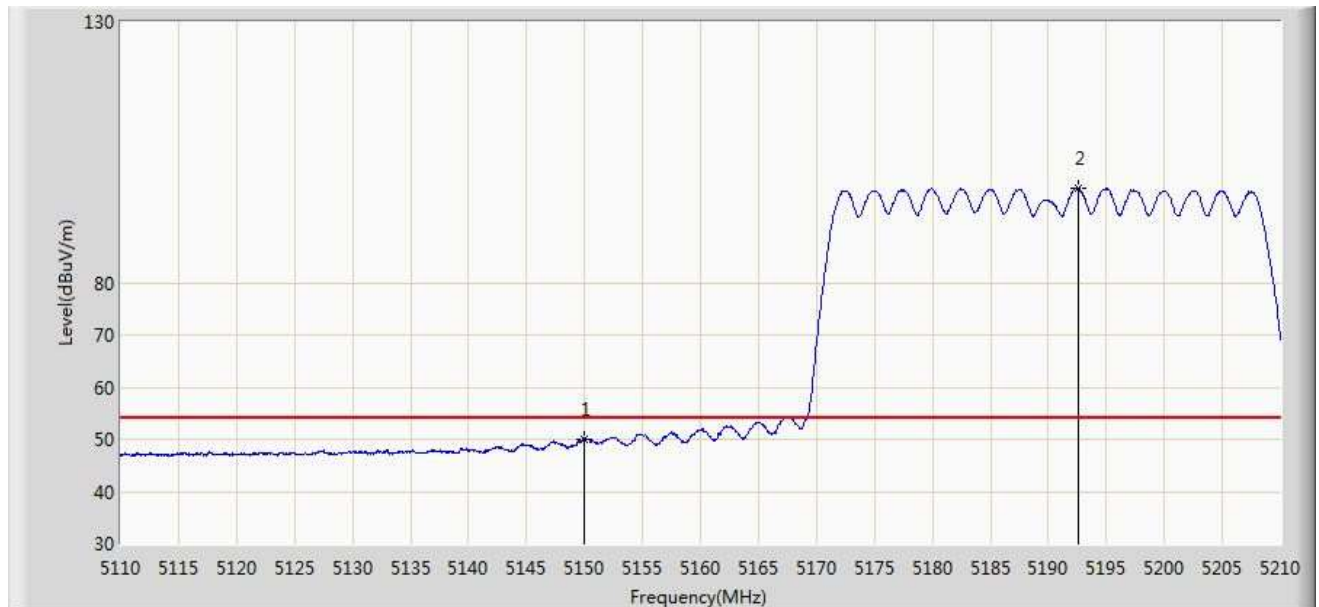


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	49.982	46.106	-4.018	54.000	3.876	AV
2		*	5192.550	98.209	94.297	N/A	N/A	3.912	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB) .

Site: AC1	Time: 2019/07/16 - 23:26
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D	Polarity: Vertical
EUT: Aruba 500 接入點	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at Channel 5190MHz Ant 0 + 1	

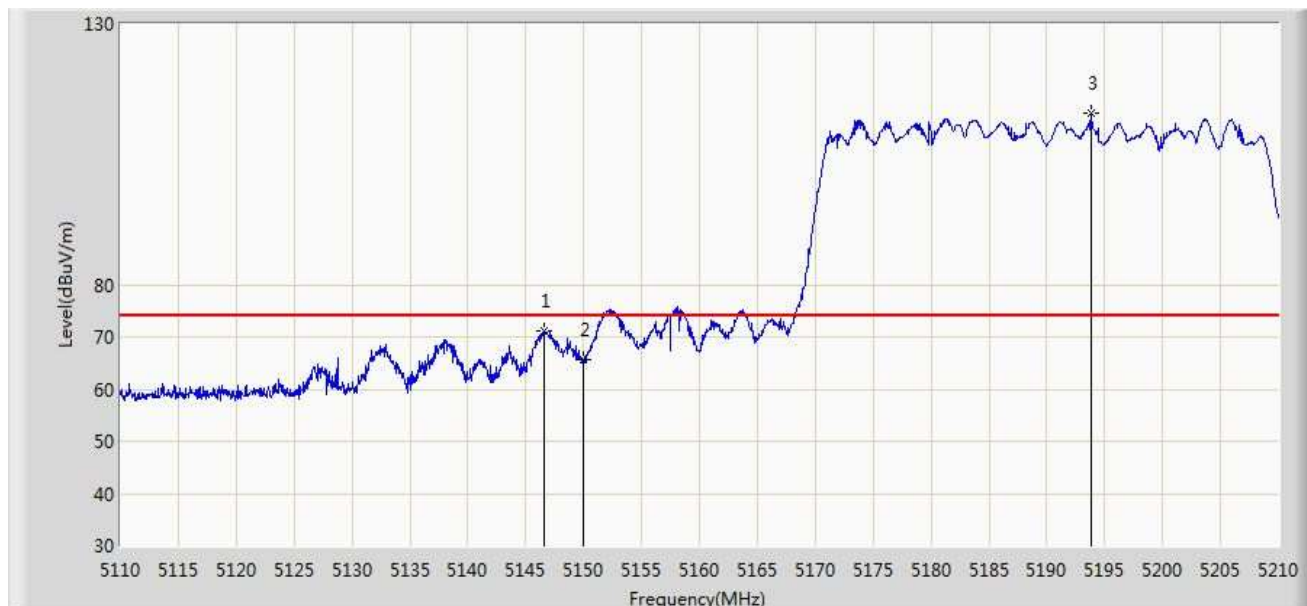


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5146.650	71.230	67.357	-2.770	74.000	3.873	PK
2			5150.000	65.670	61.794	-8.330	74.000	3.876	PK
3		*	5193.800	112.982	109.069	N/A	N/A	3.913	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB) .

Site: AC1	Time: 2019/07/16 - 23:27
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D	Polarity: Vertical
EUT: Aruba 500 接入點	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at Channel 5190MHz Ant 0 + 1	

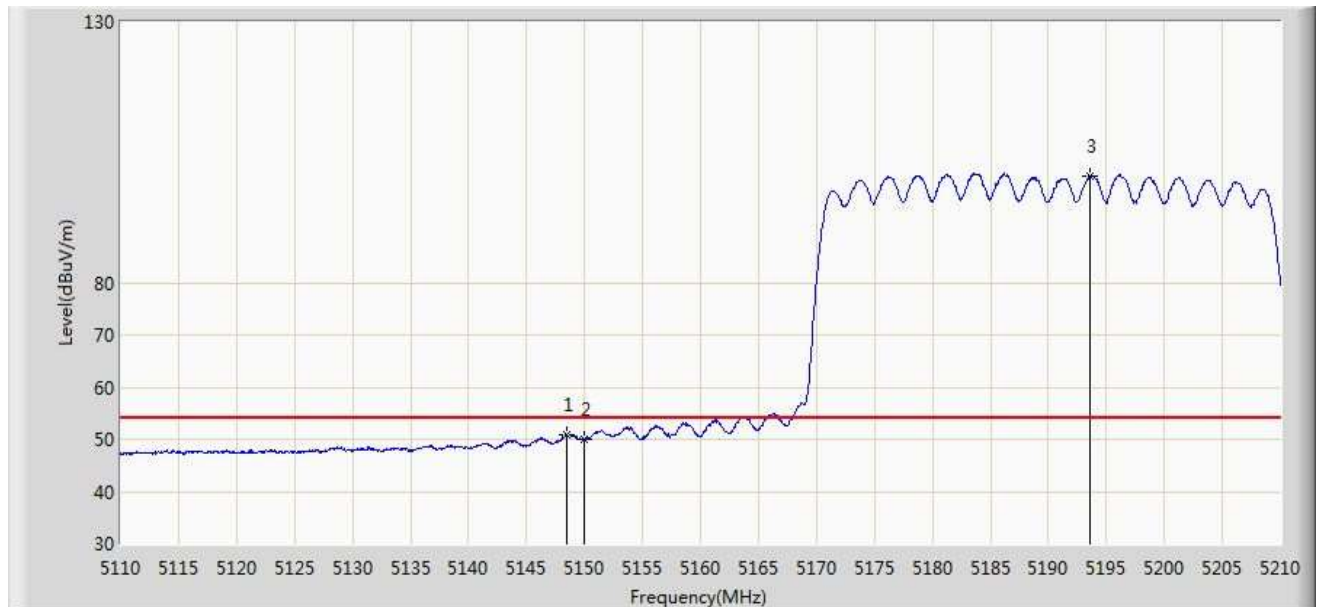


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5148.500	50.971	47.097	-3.029	54.000	3.874	AV
2			5150.000	49.857	45.981	-4.143	54.000	3.876	AV
3		*	5193.550	100.377	96.464	N/A	N/A	3.913	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB) .

Site: AC1	Time: 2019/07/11 - 22:29
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D	Polarity: Horizontal
EUT: Aruba 500 接入點	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at channel 5310MHz Ant 0 + 1	

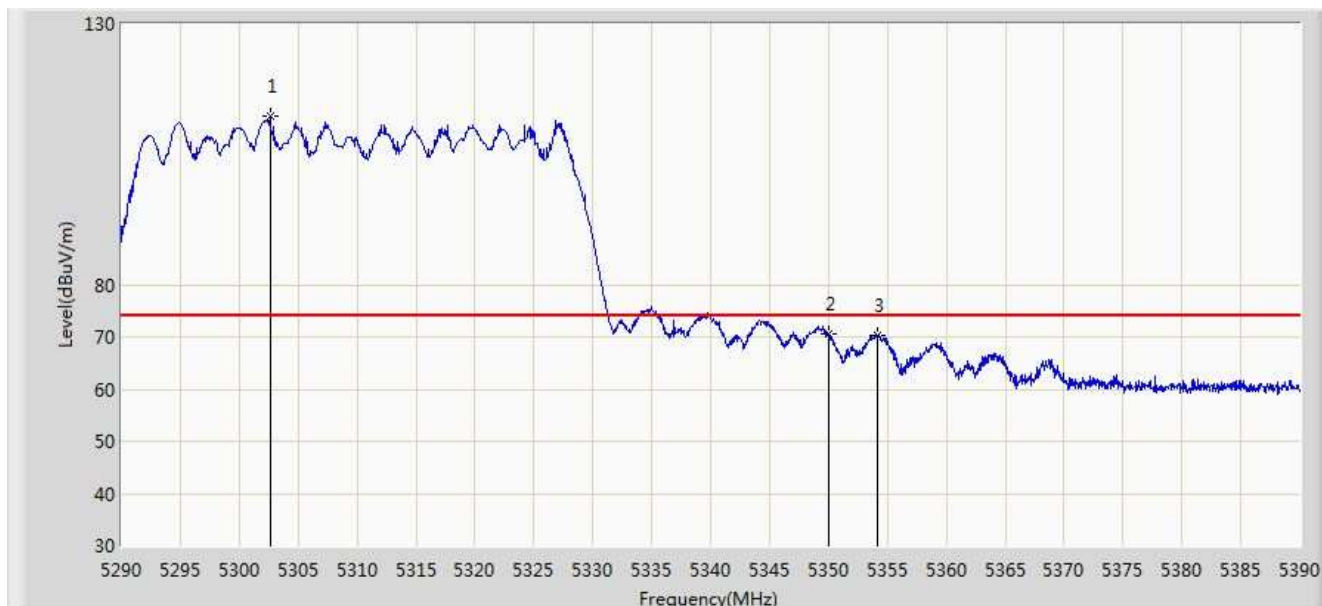


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5302.600	112.236	108.232	N/A	N/A	4.004	PK
2			5350.000	70.659	66.615	-3.341	74.000	4.044	PK
3			5354.200	70.223	66.175	-3.777	74.000	4.048	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2019/07/11 - 22:28
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D	Polarity: Horizontal
EUT: Aruba 500 接入點	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at channel 5310MHz Ant 0 + 1	

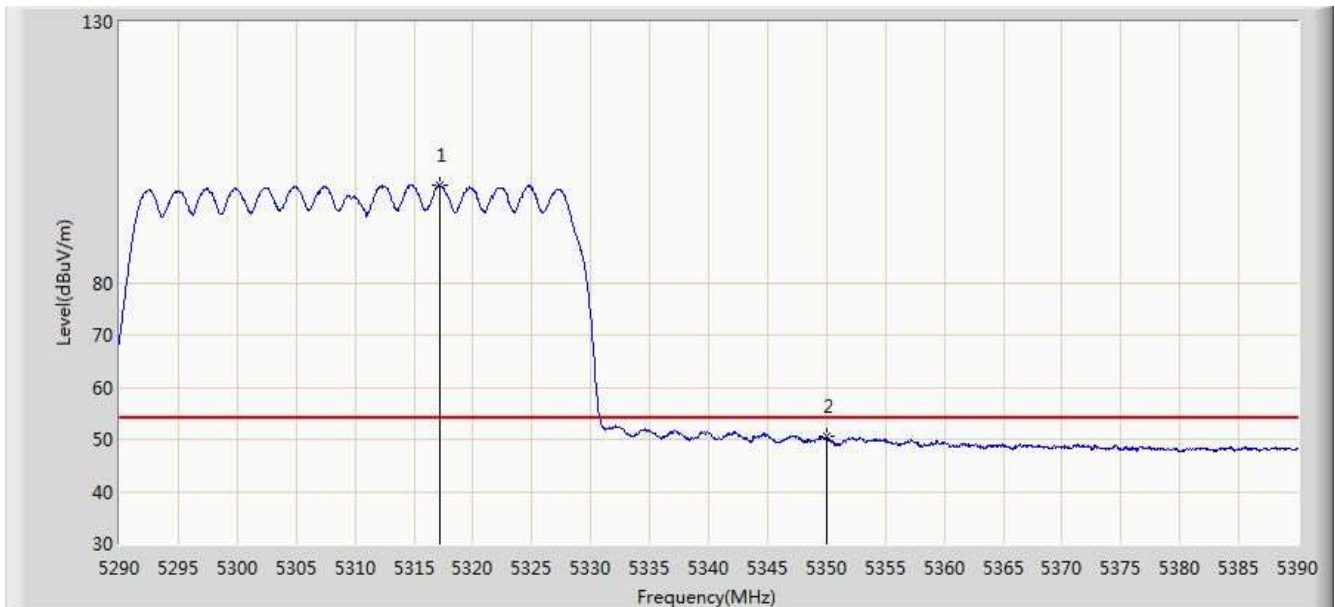


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5317.150	98.570	94.554	N/A	N/A	4.016	AV
2			5350.000	50.465	46.421	-3.535	54.000	4.044	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2019/07/11 - 22:27
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D	Polarity: Vertical
EUT: Aruba 500 接入點	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at channel 5310MHz Ant 0 + 1	

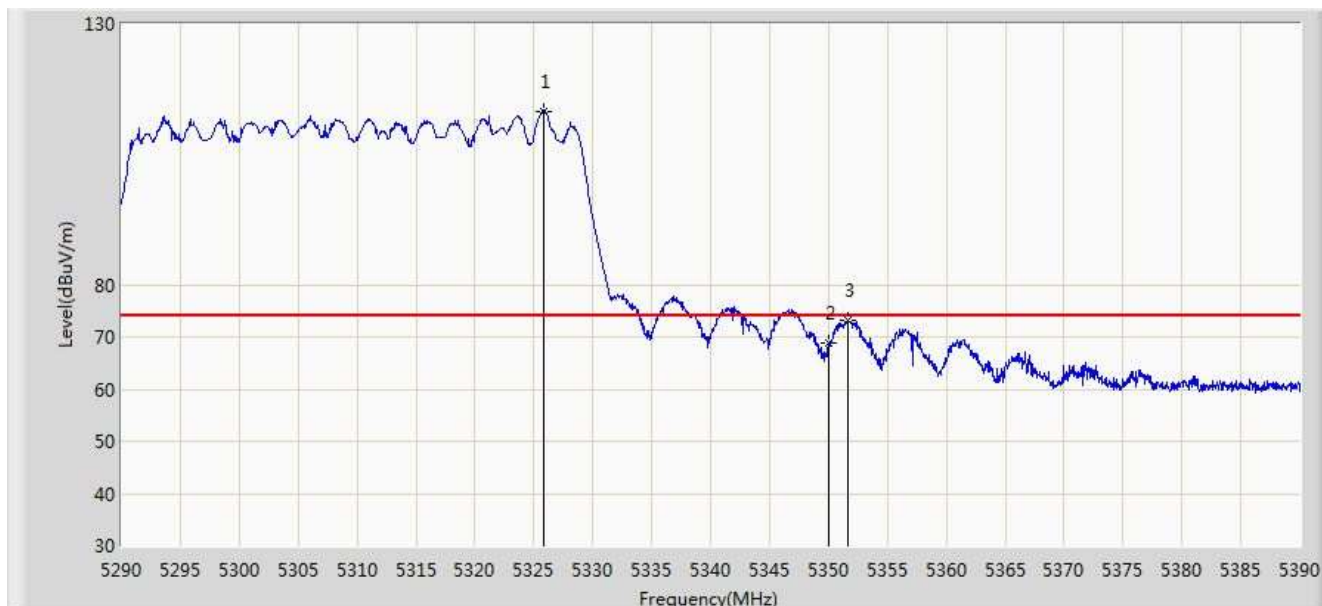


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5325.850	113.317	109.293	N/A	N/A	4.024	PK
2			5350.000	68.830	64.786	-5.170	74.000	4.044	PK
3			5351.700	73.124	69.078	-0.876	74.000	4.046	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2019/07/11 - 22:28
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D	Polarity: Vertical
EUT: Aruba 500 接入點	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at channel 5310MHz Ant 0 + 1	

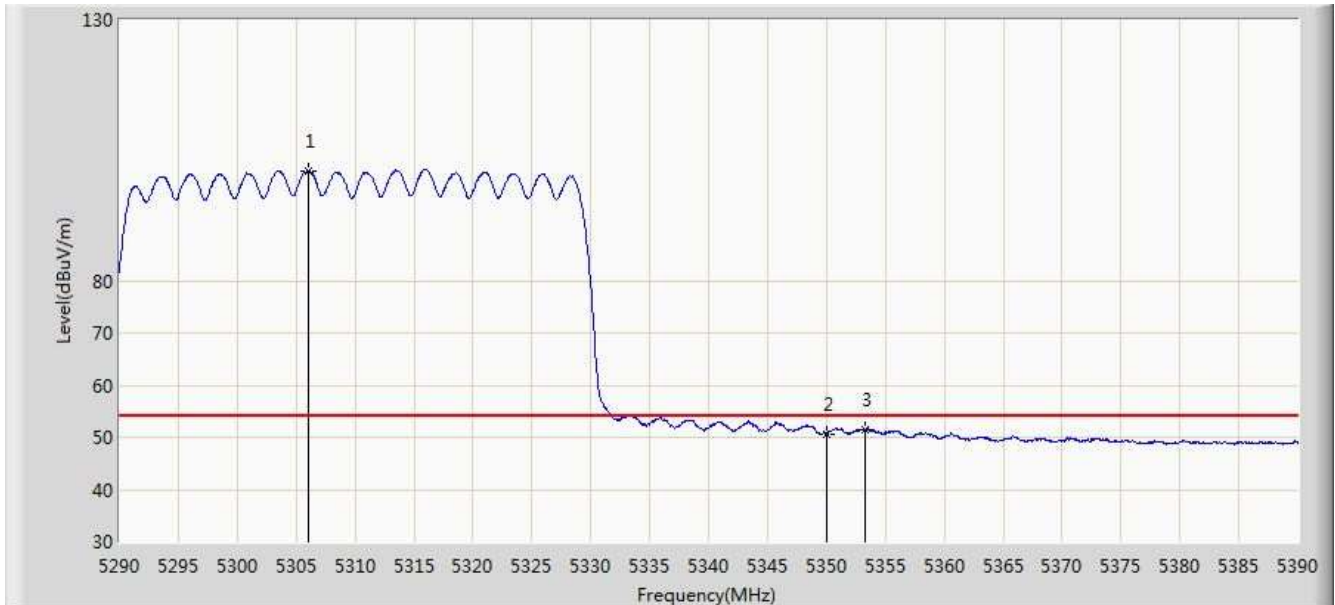


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5306.100	101.129	97.122	N/A	N/A	4.007	AV
2			5350.000	50.673	46.629	-3.327	54.000	4.044	AV
3			5353.300	51.588	47.541	-2.412	54.000	4.047	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2019/07/11 - 22:35
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D	Polarity: Horizontal
EUT: Aruba 500 接入點	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at channel 5510MHz Ant 0 + 1	

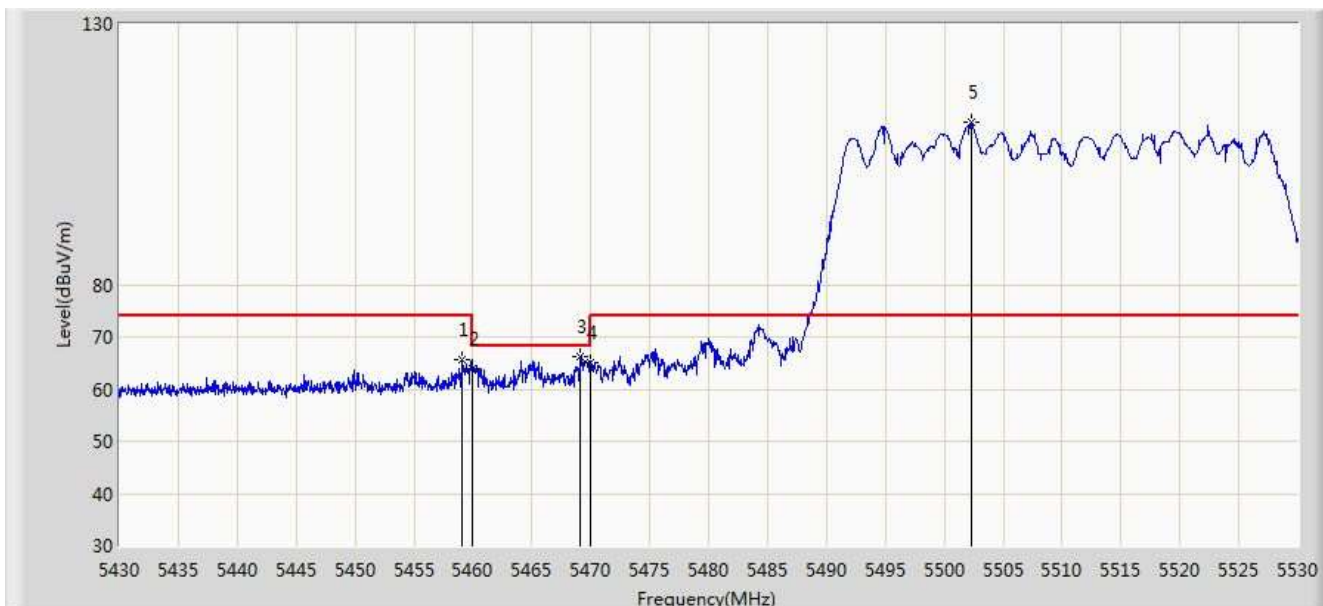


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5459.100	65.785	61.650	-8.215	74.000	4.135	PK
2			5460.000	63.982	59.846	-10.018	74.000	4.136	PK
3			5469.150	66.199	62.055	-2.001	68.200	4.144	PK
4			5470.000	65.140	60.996	-3.060	68.200	4.144	PK
5		*	5502.250	111.183	106.998	N/A	N/A	4.185	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2019/07/11 - 22:34
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D	Polarity: Horizontal
EUT: Aruba 500 接入點	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at channel 5510MHz Ant 0 + 1	

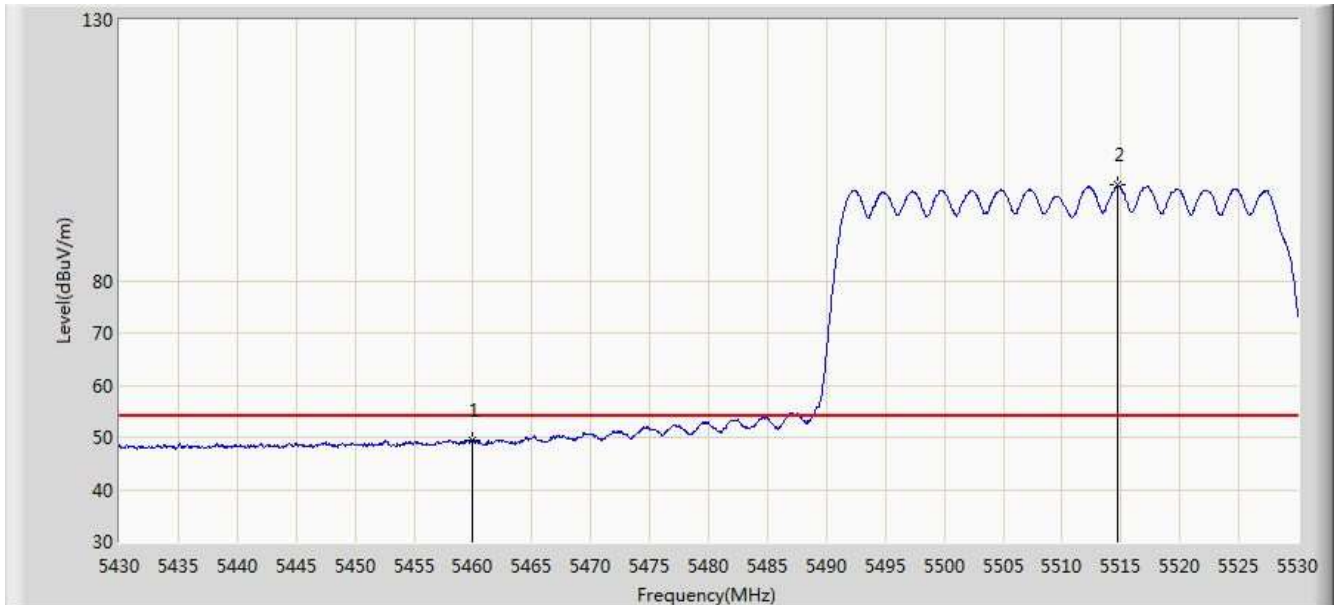


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	49.508	45.372	-4.492	54.000	4.136	AV
2		*	5514.700	98.296	94.069	N/A	N/A	4.227	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2019/07/11 - 22:33
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D	Polarity: Vertical
EUT: Aruba 500 接入點	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at channel 5510MHz Ant 0 + 1	

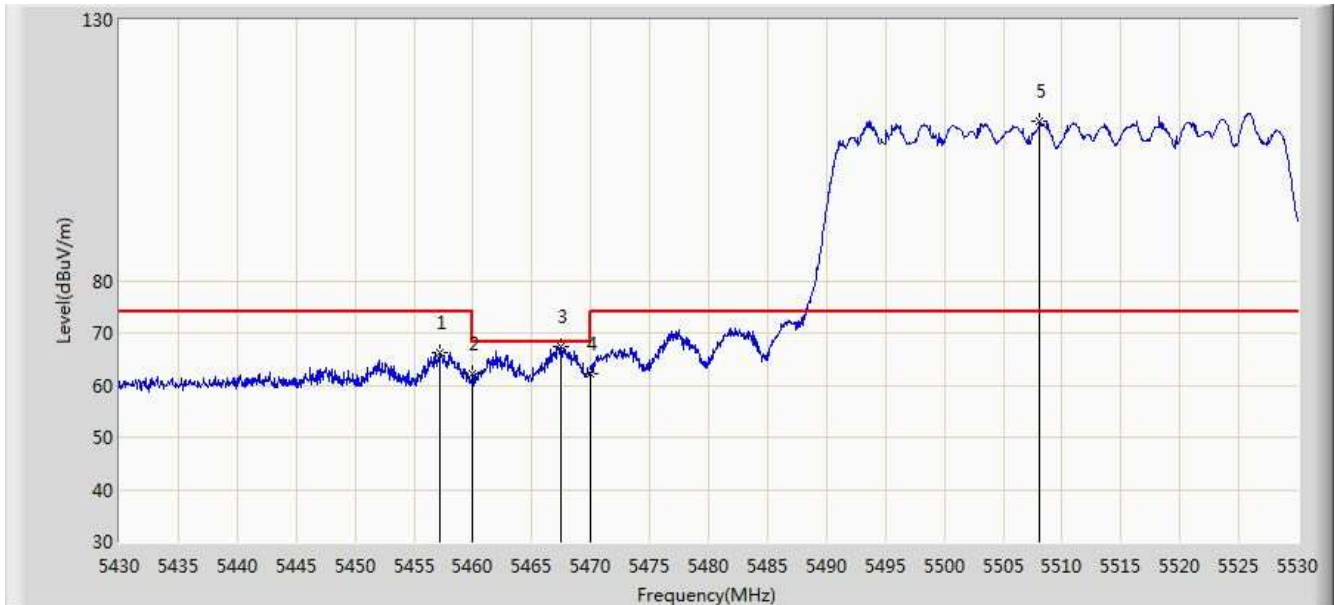


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5457.250	66.200	62.066	-7.800	74.000	4.134	PK
2			5460.000	62.143	58.007	-11.857	74.000	4.136	PK
3			5467.450	67.504	63.362	-0.696	68.200	4.142	PK
4			5470.000	62.238	58.094	-5.962	68.200	4.144	PK
5		*	5508.100	110.643	106.442	N/A	N/A	4.202	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2019/07/11 - 22:34
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D	Polarity: Vertical
EUT: Aruba 500 接入點	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at channel 5510MHz Ant 0 + 1	

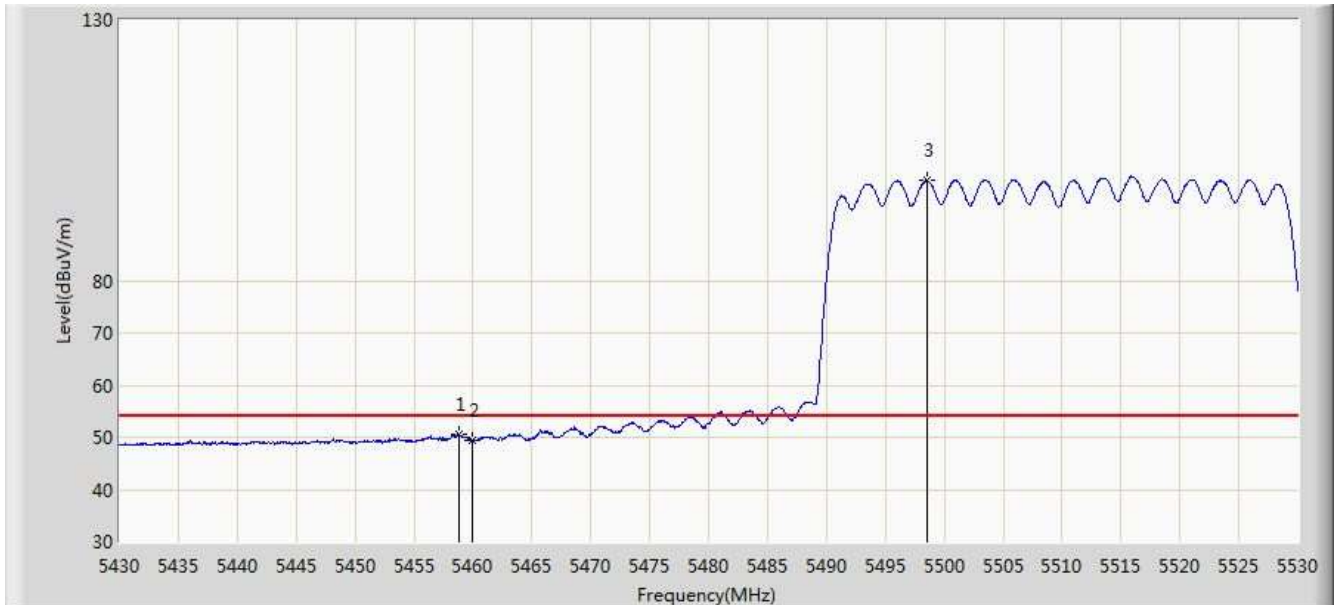


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5458.850	50.475	46.340	-3.525	54.000	4.135	AV
2			5460.000	49.499	45.363	-4.501	54.000	4.136	AV
3		*	5498.550	99.132	94.954	N/A	N/A	4.179	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2019/07/11 - 22:40
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D	Polarity: Horizontal
EUT: Aruba 500 接入點	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at channel 5670MHz Ant 0 + 1	

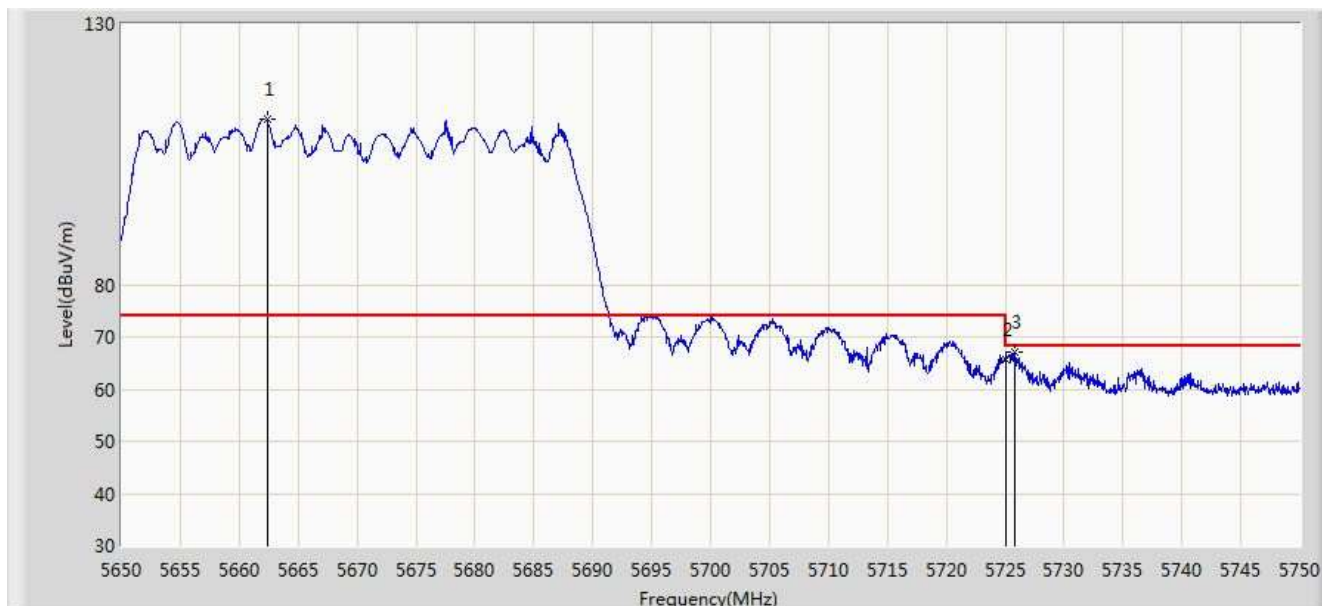


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5662.350	111.841	107.047	N/A	N/A	4.794	PK
2			5725.000	65.523	60.489	-2.677	68.200	5.034	PK
3			5725.800	67.146	62.109	-1.054	68.200	5.037	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2019/07/11 - 22:39
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D	Polarity: Vertical
EUT: Aruba 500 接入點	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at channel 5670MHz Ant 0 + 1	

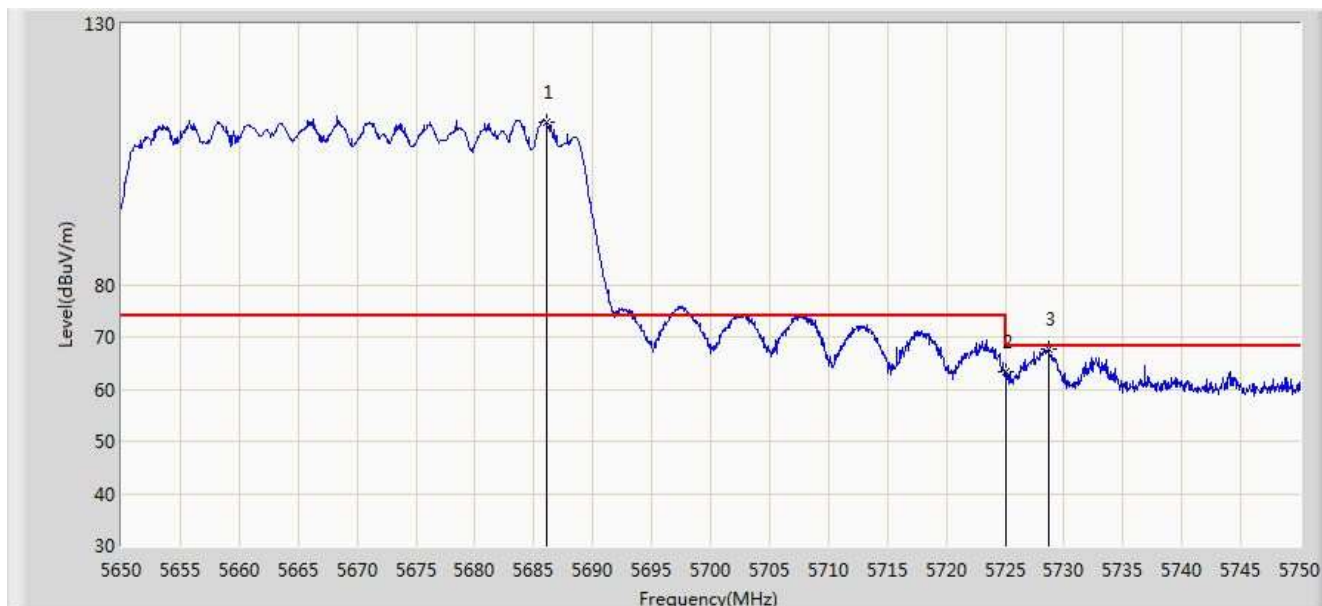


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5686.050	111.248	106.363	N/A	N/A	4.884	PK
2			5725.000	63.336	58.302	-4.864	68.200	5.034	PK
3			5728.650	67.729	62.681	-0.471	68.200	5.048	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2019/07/11 - 22:44
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D	Polarity: Horizontal
EUT: Aruba 500 接入點	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at channel 5755MHz Ant 0 + 1	

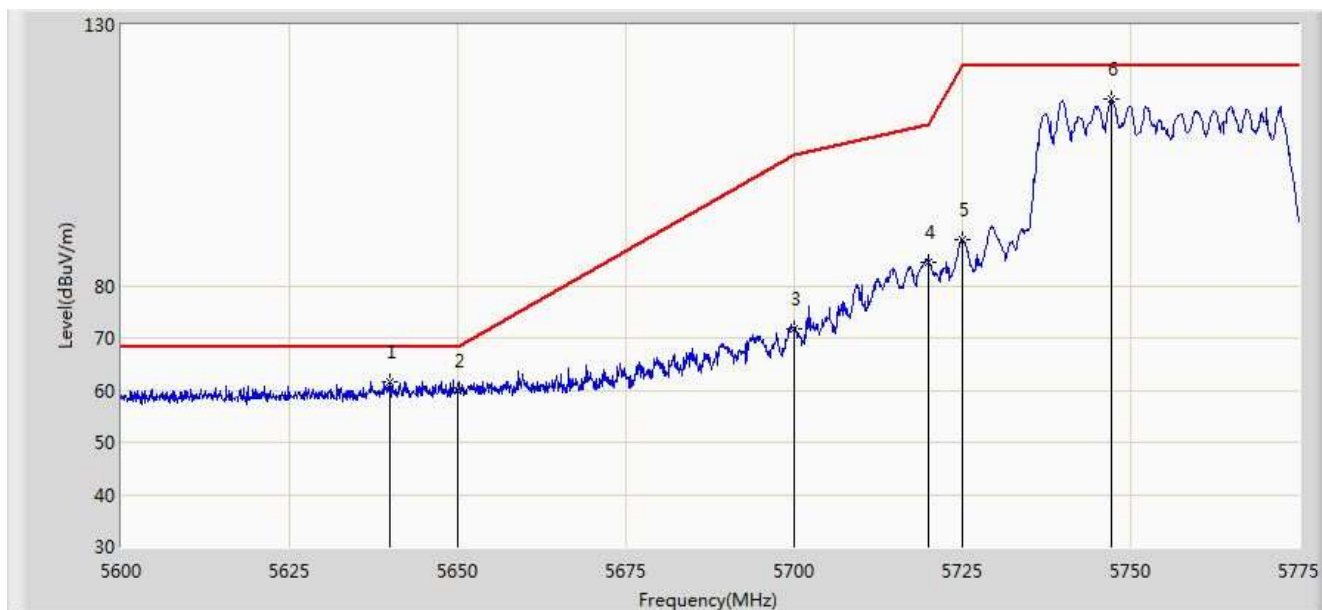


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5639.812	61.683	56.976	-6.517	68.200	4.708	PK
2			5650.000	59.779	55.033	-8.421	68.200	4.746	PK
3			5700.000	71.606	66.668	-33.594	105.200	4.938	PK
4			5720.000	84.413	79.398	-26.387	110.800	5.015	PK
5			5725.000	88.771	83.737	-33.429	122.200	5.034	PK
6		*	5747.175	115.814	110.695	N/A	N/A	5.119	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2019/07/11 - 22:41
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D	Polarity: Vertical
EUT: Aruba 500 接入點	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at channel 5755MHz Ant 0 + 1	

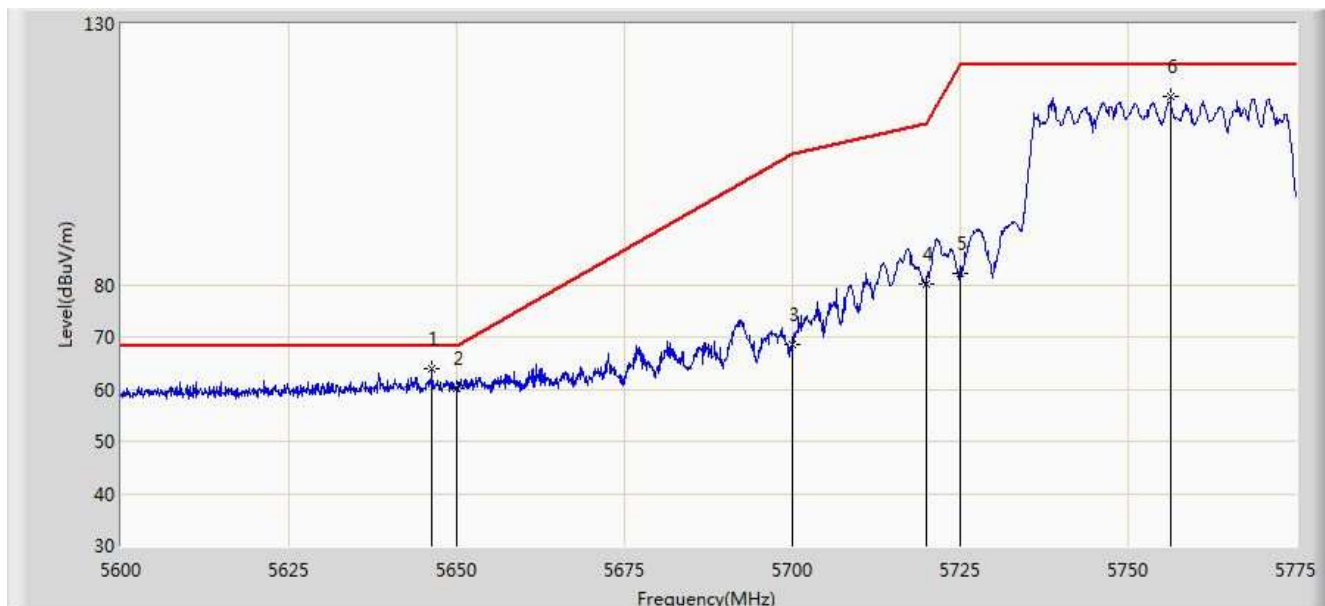


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5646.288	63.796	59.064	-4.404	68.200	4.732	PK
2			5650.000	60.143	55.397	-8.057	68.200	4.746	PK
3			5700.000	68.636	63.698	-36.564	105.200	4.938	PK
4			5720.000	80.154	75.139	-30.646	110.800	5.015	PK
5			5725.000	82.148	77.114	-40.052	122.200	5.034	PK
6			5756.362	116.071	110.917	N/A	N/A	5.154	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2019/07/11 - 22:46
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D	Polarity: Horizontal
EUT: Aruba 500 接入點	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at channel 5795MHz Ant 0 + 1	

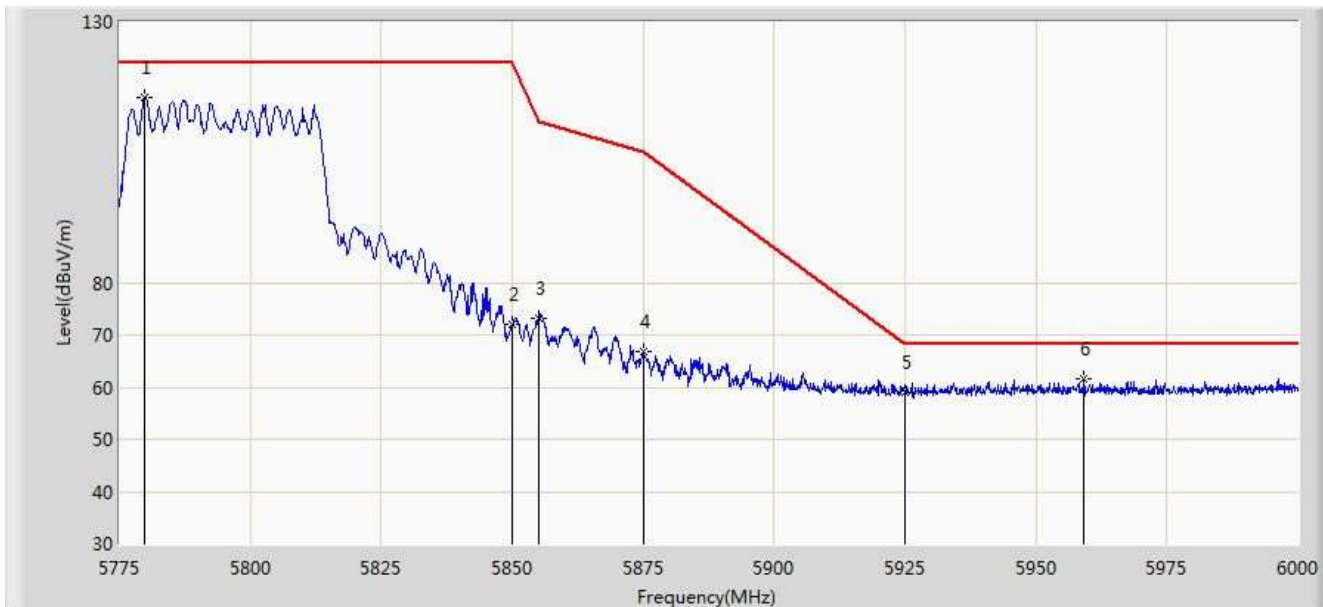


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5779.837	115.637	110.392	N/A	N/A	5.246	PK
2			5850.000	71.920	66.406	-50.280	122.200	5.514	PK
3			5855.000	73.331	67.798	-37.469	110.800	5.533	PK
4			5875.000	66.707	61.097	-38.493	105.200	5.610	PK
5			5925.000	58.892	53.090	-9.308	68.200	5.802	PK
6			5959.163	61.540	55.607	-6.660	68.200	5.933	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2019/07/11 - 22:44
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D	Polarity: Vertical
EUT: Aruba 500 接入點	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at channel 5795MHz Ant 0 + 1	

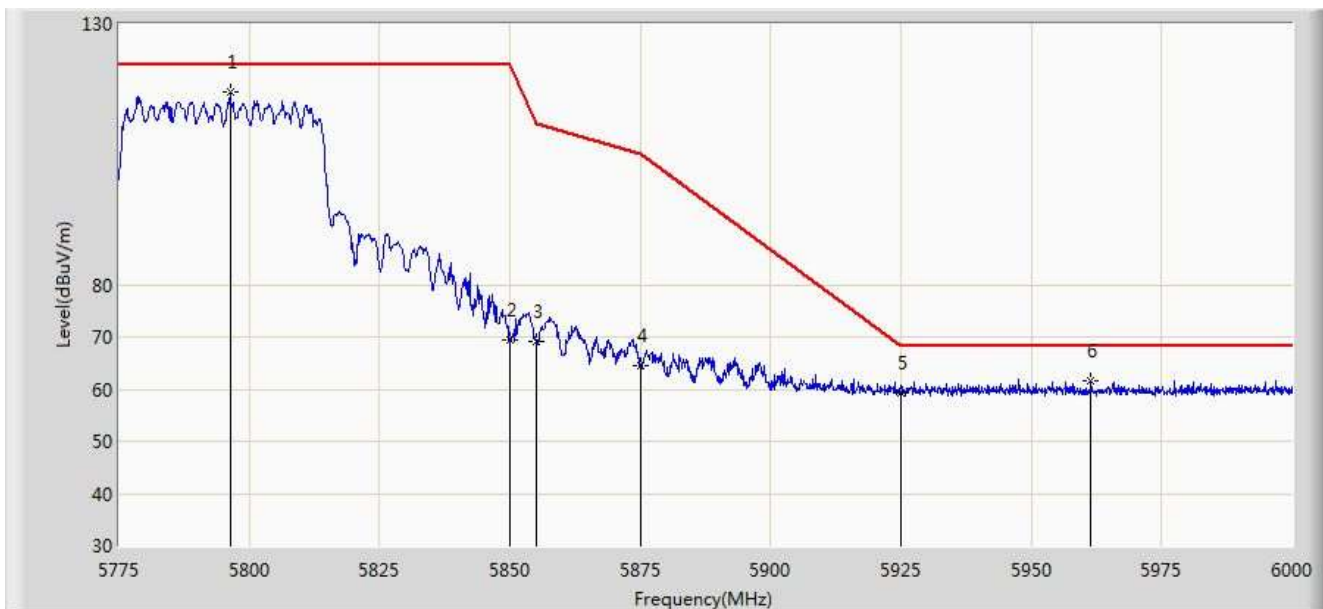


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5796.375	116.966	111.658	N/A	N/A	5.308	PK
2			5850.000	69.334	63.820	-52.866	122.200	5.514	PK
3			5855.000	69.210	63.677	-41.590	110.800	5.533	PK
4			5875.000	64.586	58.976	-40.614	105.200	5.610	PK
5			5925.000	59.376	53.574	-8.824	68.200	5.802	PK
6			5961.413	61.694	55.752	-6.506	68.200	5.942	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2019/07/16 - 23:30
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D	Polarity: Horizontal
EUT: Aruba 500 接入點	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11ax-HE80 at Channel 5210MHz Ant 0 + 1	

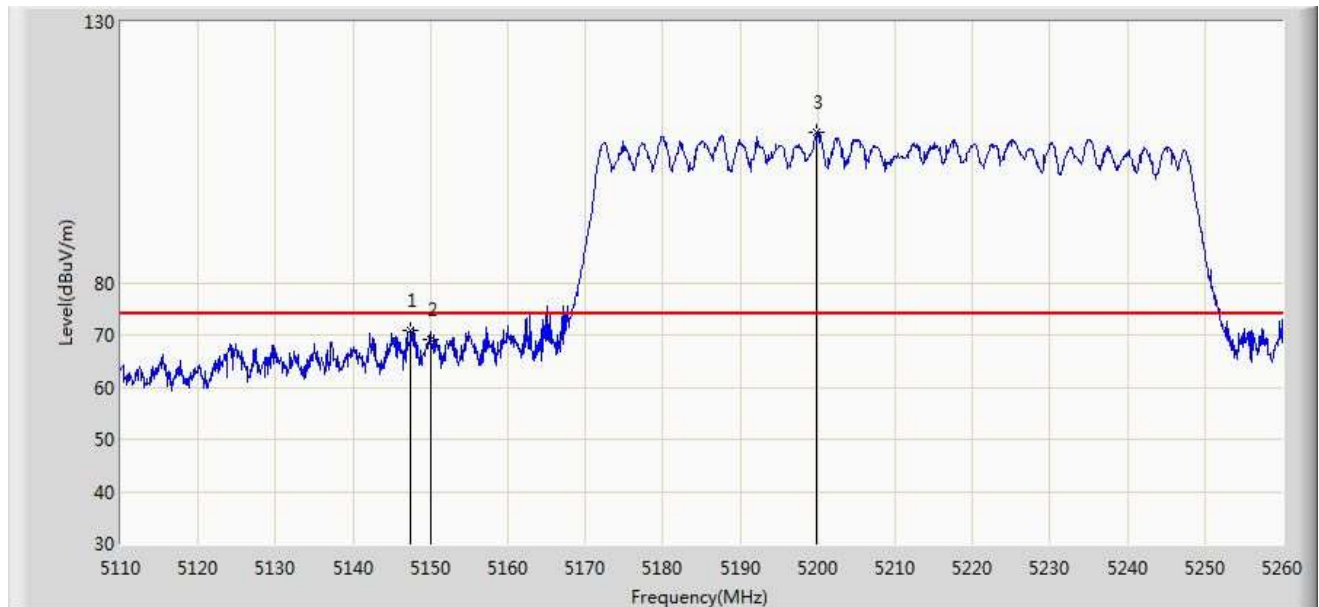


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5147.425	70.956	67.082	-3.044	74.000	3.874	PK
2			5150.000	69.034	65.158	-4.966	74.000	3.876	PK
3		*	5199.925	108.833	104.915	N/A	N/A	3.918	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB) .

Site: AC1	Time: 2019/07/16 - 23:29
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D	Polarity: Horizontal
EUT: Aruba 500 接入點	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11ax-HE80 at Channel 5210MHz Ant 0 + 1	

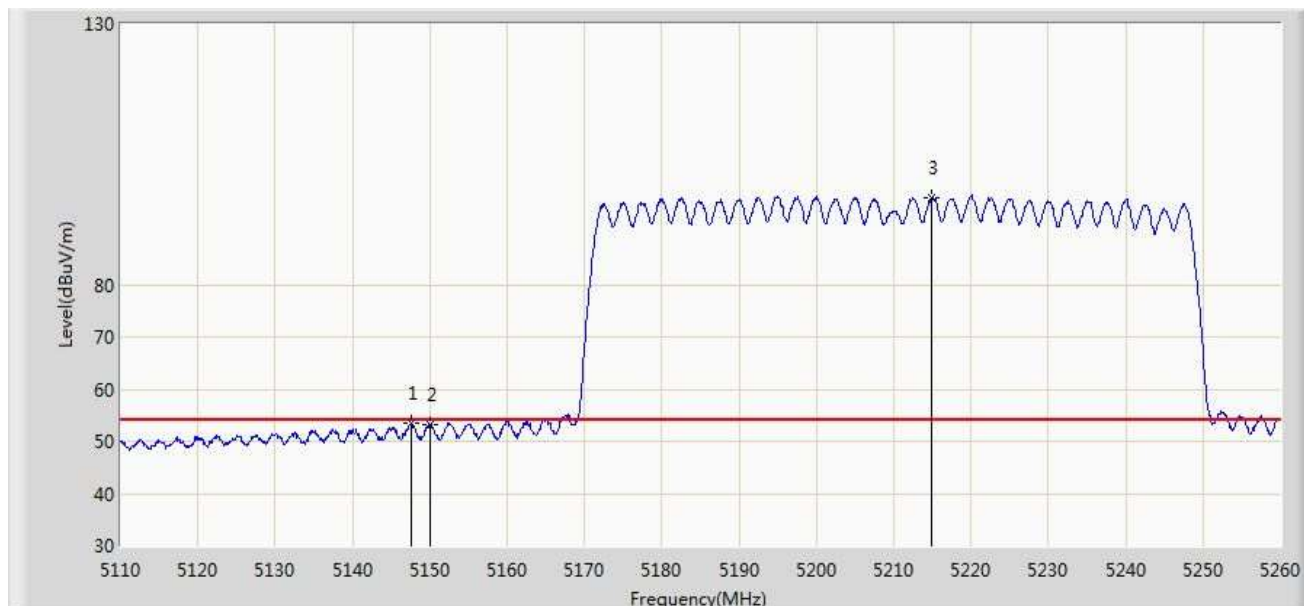


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5147.500	53.550	49.676	-0.450	54.000	3.874	AV
2			5150.000	53.120	49.244	-0.880	54.000	3.876	AV
3		*	5214.850	96.706	92.775	N/A	N/A	3.931	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB) .

Site: AC1	Time: 2019/07/16 - 23:30
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D	Polarity: Vertical
EUT: Aruba 500 接入點	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11ax-HE80 at Channel 5210MHz Ant 0 + 1	

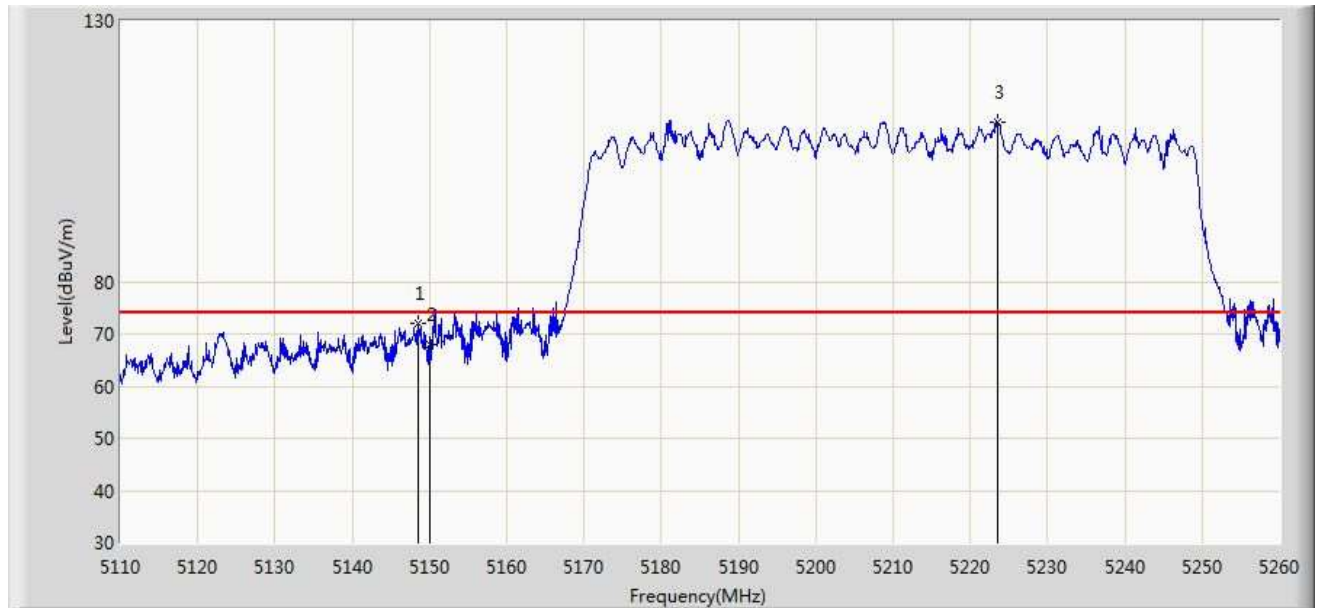


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5148.625	71.962	68.087	-2.038	74.000	3.875	PK
2			5150.000	67.883	64.007	-6.117	74.000	3.876	PK
3		*	5223.475	110.631	106.693	N/A	N/A	3.938	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB) .

Site: AC1	Time: 2019/07/16 - 23:31
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D	Polarity: Vertical
EUT: Aruba 500 接入點	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11ax-HE80 at Channel 5210MHz Ant 0 + 1	

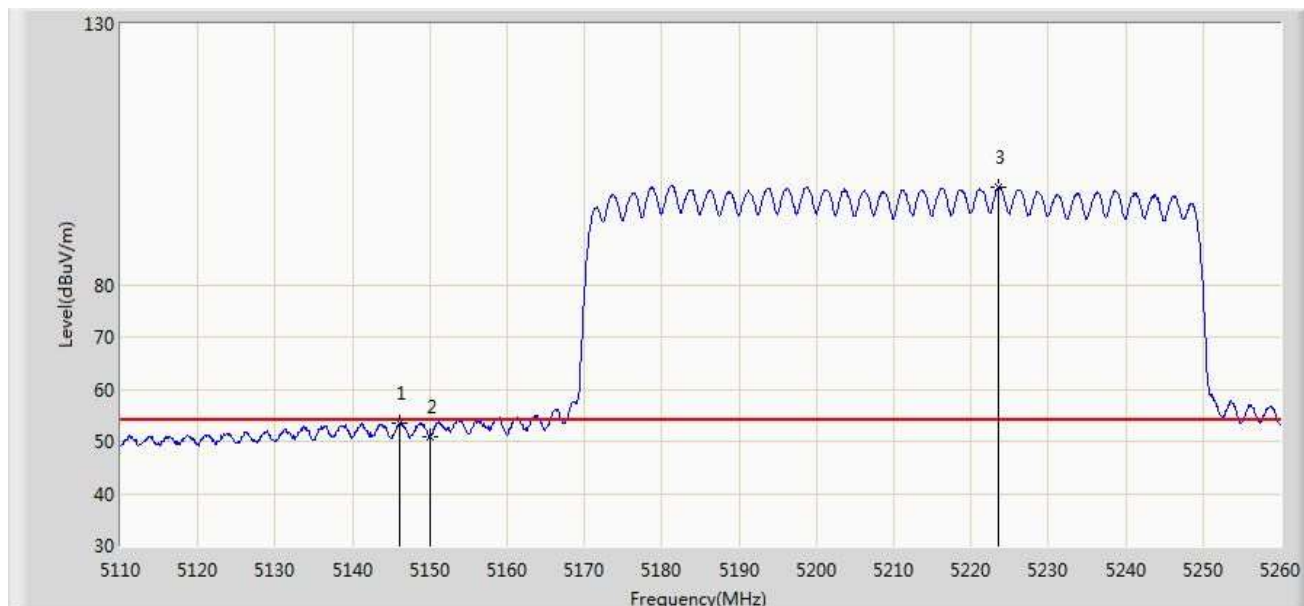


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5146.150	53.541	49.669	-0.459	54.000	3.872	AV
2			5150.000	50.874	46.998	-3.126	54.000	3.876	AV
3		*	5223.625	98.799	94.861	N/A	N/A	3.938	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB) .

Site: AC1	Time: 2019/07/11 - 23:01
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D	Polarity: Horizontal
EUT: Aruba 500 接入點	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11ax-HE80 at channel 5290MHz Ant 0 + 1	

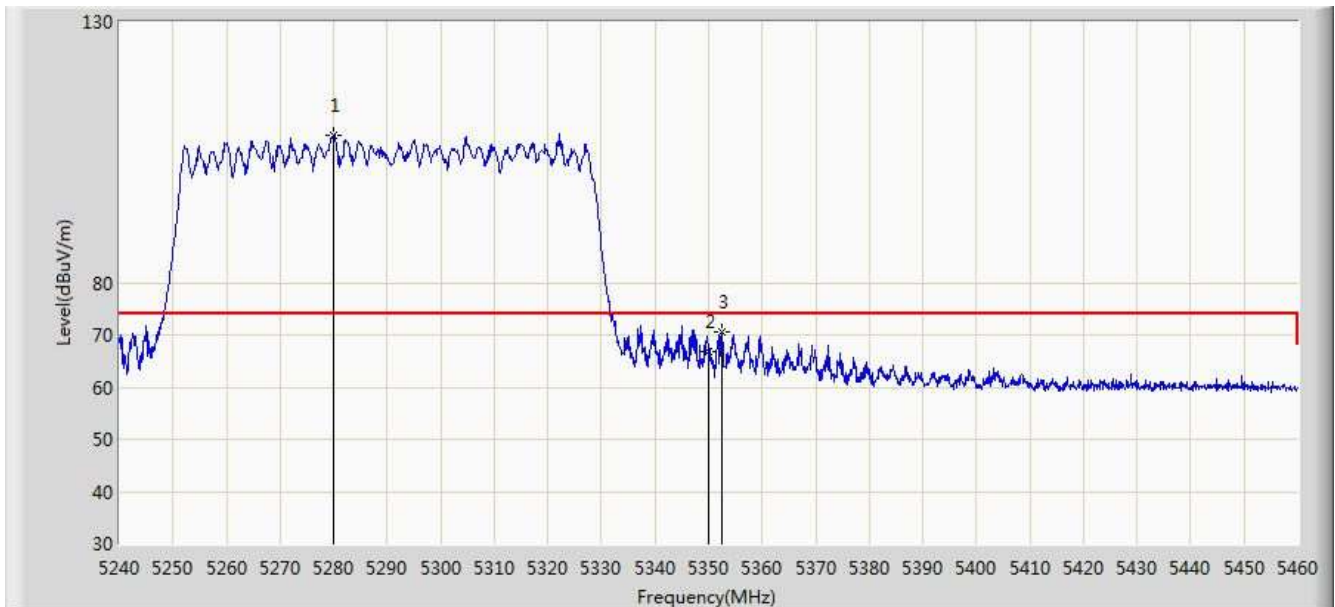


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5279.930	108.175	104.190	N/A	N/A	3.985	PK
2			5350.000	66.877	62.833	-7.123	74.000	4.044	PK
3			5352.420	70.455	66.409	-3.545	74.000	4.046	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2019/07/11 - 23:04
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D	Polarity: Horizontal
EUT: Aruba 500 接入點	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11ax-HE80 at channel 5290MHz Ant 0 + 1	

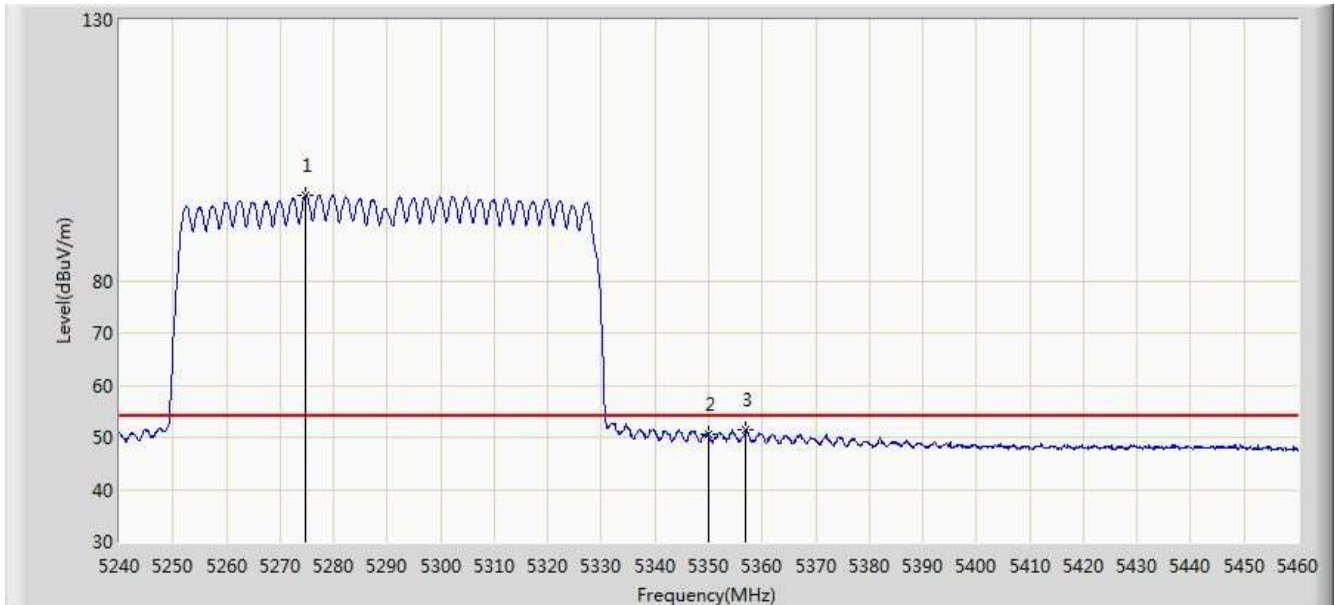


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5274.760	96.396	92.415	N/A	N/A	3.981	AV
2			5350.000	50.623	46.579	-3.377	54.000	4.044	AV
3			5356.930	51.468	47.418	-2.532	54.000	4.050	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2019/07/11 - 23:00
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D	Polarity: Vertical
EUT: Aruba 500 接入點	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11ax-HE80 at channel 5290MHz Ant 0 + 1	

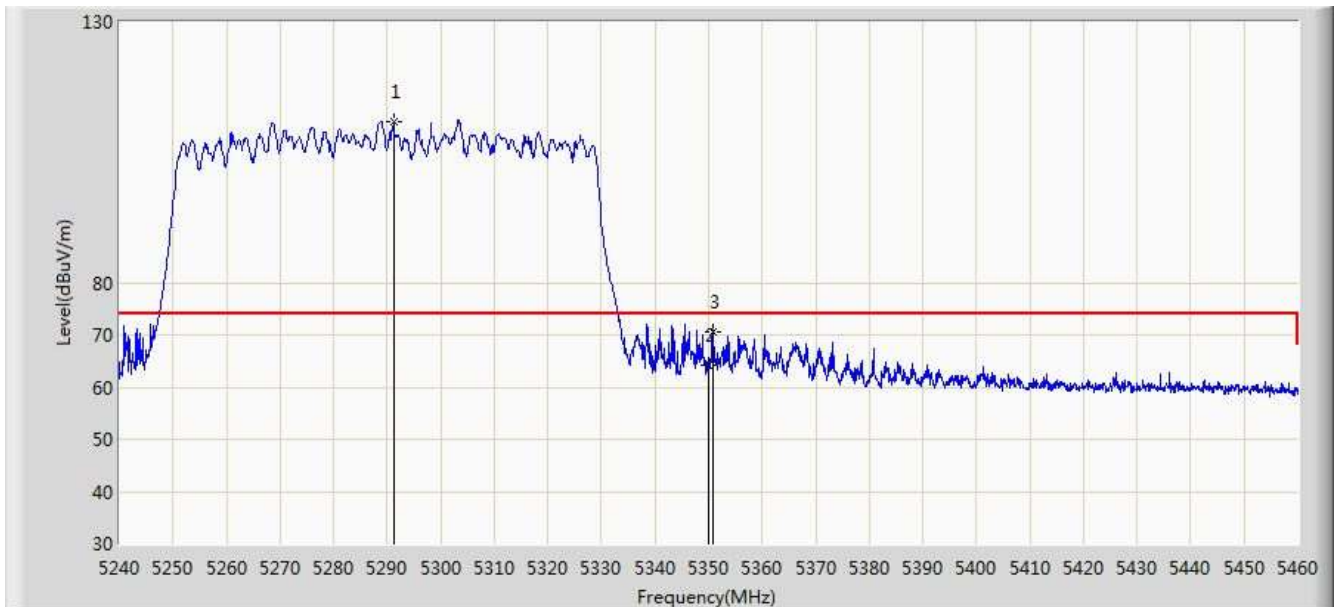


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5291.150	110.922	106.928	N/A	N/A	3.994	PK
2			5350.000	64.333	60.289	-9.667	74.000	4.044	PK
3			5350.770	70.531	66.486	-3.469	74.000	4.045	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2019/07/11 - 22:59
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D	Polarity: Vertical
EUT: Aruba 500 接入點	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11ax-HE80 at channel 5290MHz Ant 0 + 1	

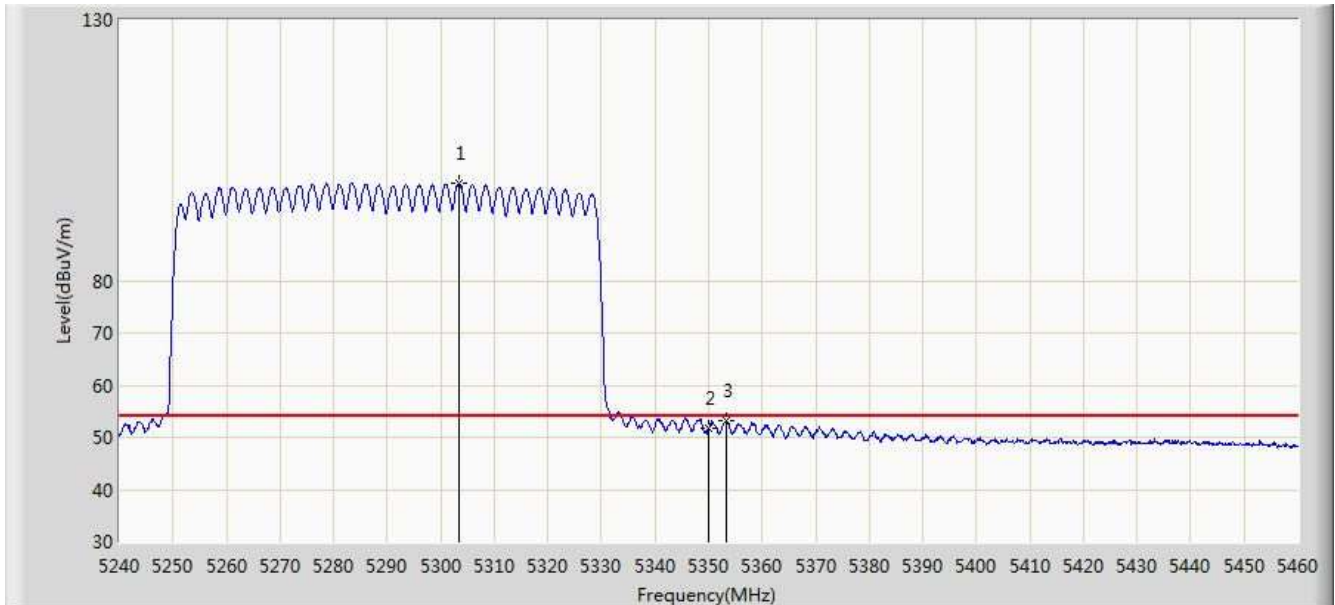


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5303.470	98.658	94.653	N/A	N/A	4.005	AV
2			5350.000	51.639	47.595	-2.361	54.000	4.044	AV
3			5353.300	53.102	49.055	-0.898	54.000	4.047	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2019/07/11 - 23:11
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D	Polarity: Horizontal
EUT: Aruba 500 接入點	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11ax-HE80 at channel 5530MHz Ant 0 + 1	

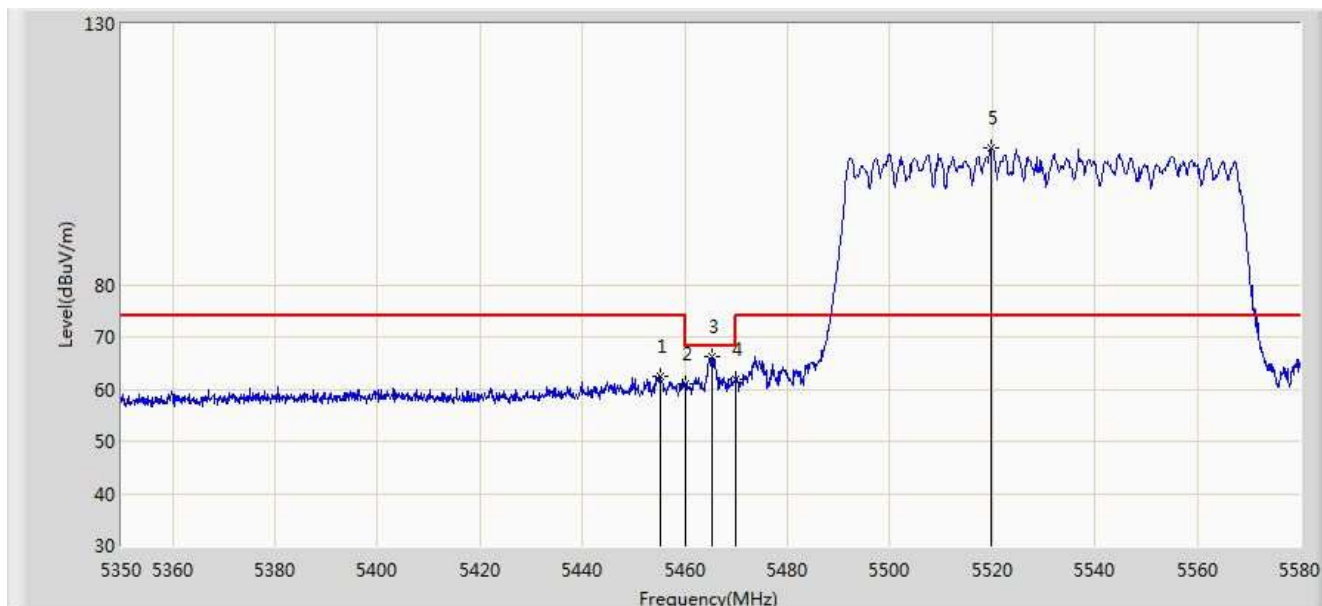


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5455.110	62.577	58.445	-11.423	74.000	4.132	PK
2			5460.000	61.104	56.968	-12.896	74.000	4.136	PK
3			5465.230	66.167	62.027	-2.033	68.200	4.140	PK
4			5470.000	61.869	57.725	-6.331	68.200	4.144	PK
5		*	5519.740	106.137	101.891	N/A	N/A	4.246	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2019/07/11 - 23:10
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D	Polarity: Horizontal
EUT: Aruba 500 接入點	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11ax-HE80 at channel 5530MHz Ant 0 + 1	

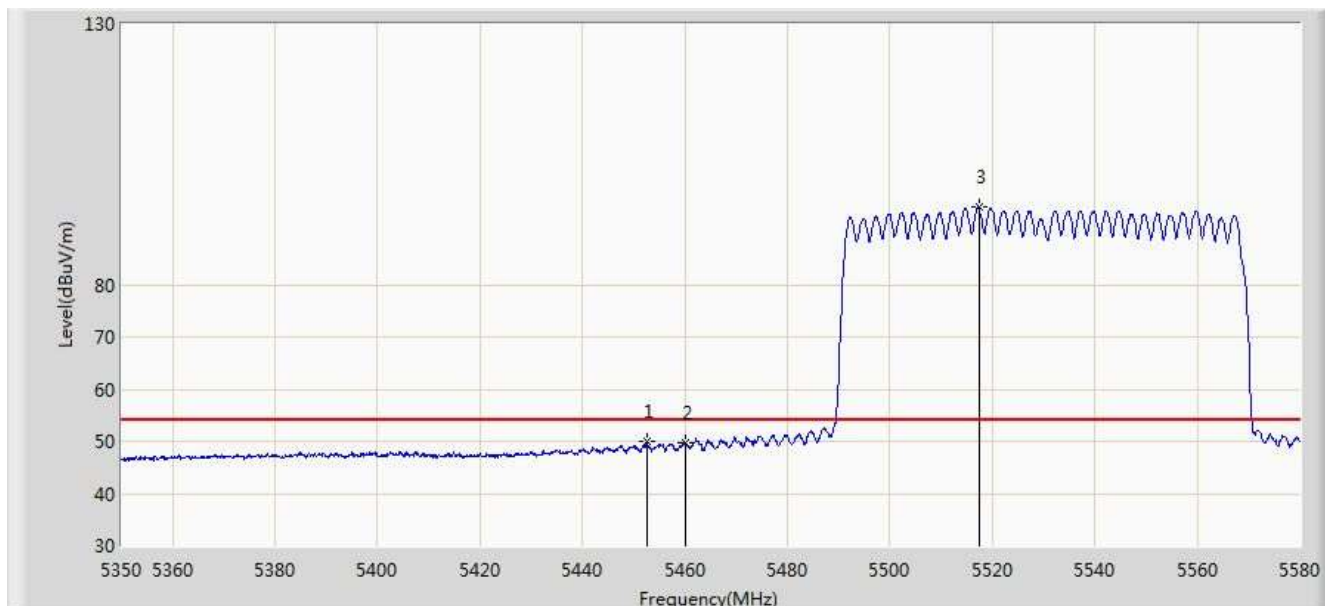


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5452.465	49.991	45.861	-4.009	54.000	4.130	AV
2			5460.000	49.662	45.526	-4.338	54.000	4.136	AV
3		*	5517.325	94.806	90.569	N/A	N/A	4.236	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2019/07/11 - 23:09
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D	Polarity: Vertical
EUT: Aruba 500 接入點	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11ax-HE80 at channel 5530MHz Ant 0 + 1	

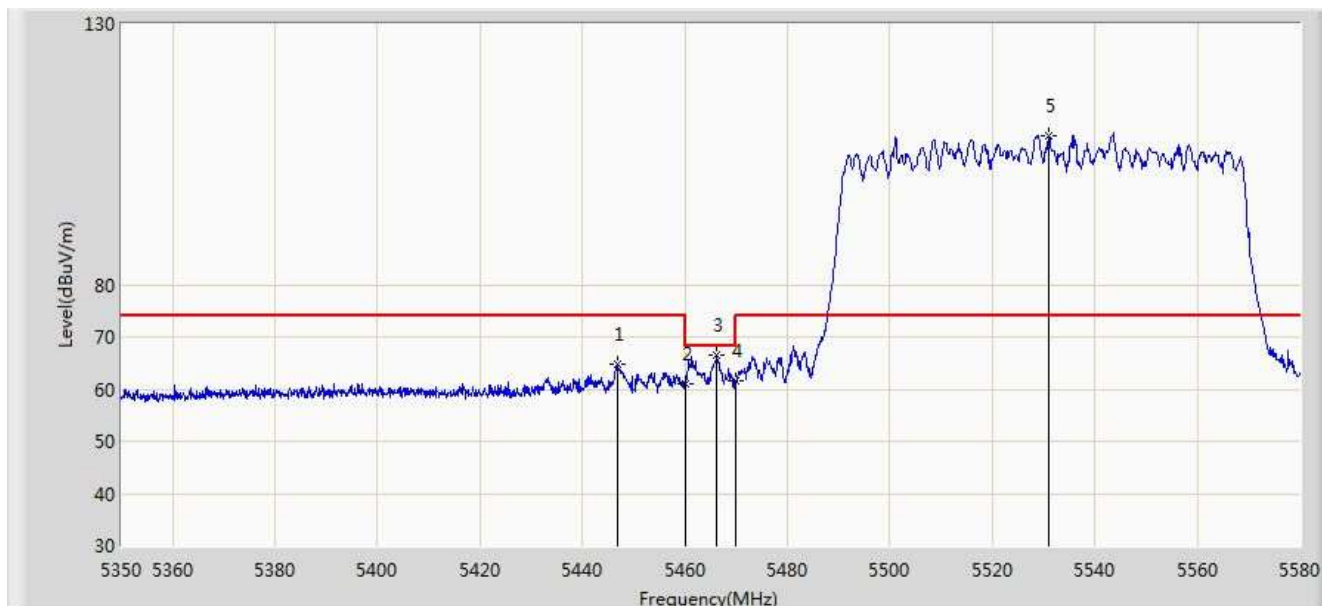


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5446.945	64.883	60.758	-9.117	74.000	4.125	PK
2			5460.000	60.896	56.760	-13.104	74.000	4.136	PK
3			5466.265	66.608	62.467	-1.592	68.200	4.141	PK
4			5470.000	61.704	57.560	-6.496	68.200	4.144	PK
5		*	5530.895	108.579	104.290	N/A	N/A	4.289	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2019/07/11 - 23:10
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D	Polarity: Vertical
EUT: Aruba 500 接入點	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11ax-HE80 at channel 5530MHz Ant 0 + 1	

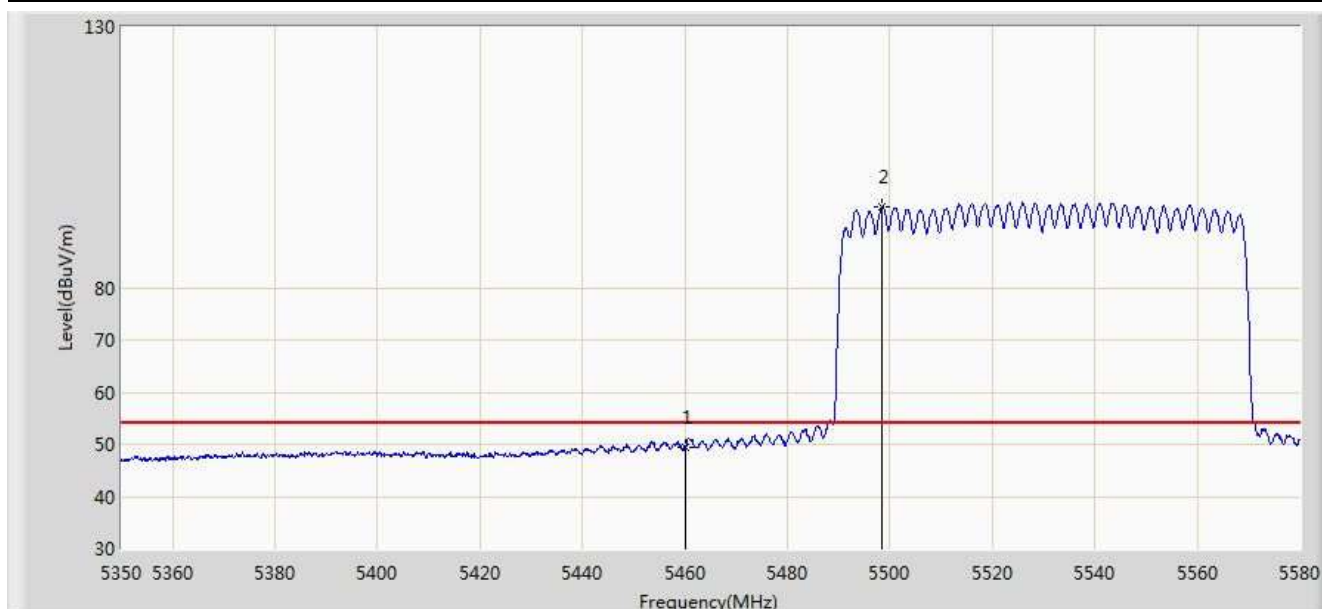


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	49.325	45.189	-4.675	54.000	4.136	AV
2		*	5498.465	95.441	91.263	N/A	N/A	4.179	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2019/07/11 - 23:15
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D	Polarity: Horizontal
EUT: Aruba 500 接入點	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11ax-HE80 at channel 5610MHz Ant 0 + 1	

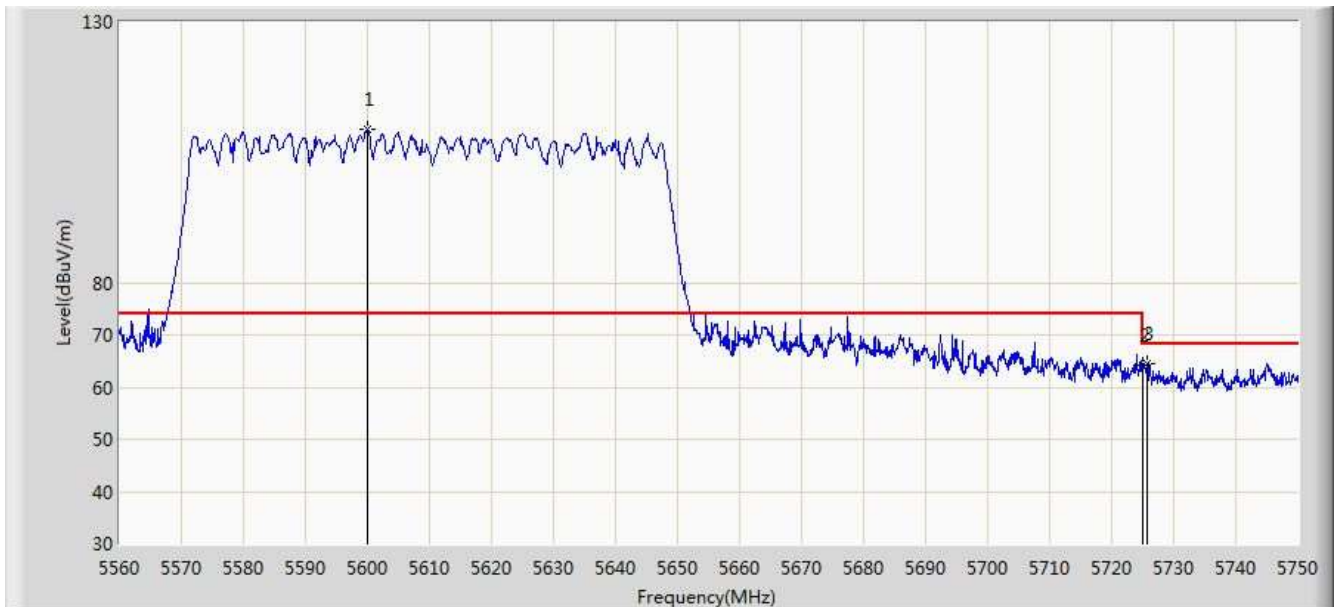


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5599.900	109.370	104.817	35.370	74.000	4.554	PK
2			5725.000	64.280	59.246	-3.920	68.200	5.034	PK
3			5725.775	64.621	59.584	-3.579	68.200	5.037	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2019/07/11 - 23:14
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D	Polarity: Vertical
EUT: Aruba 500 接入點	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11ax-HE80 at channel 5610MHz Ant 0 + 1	

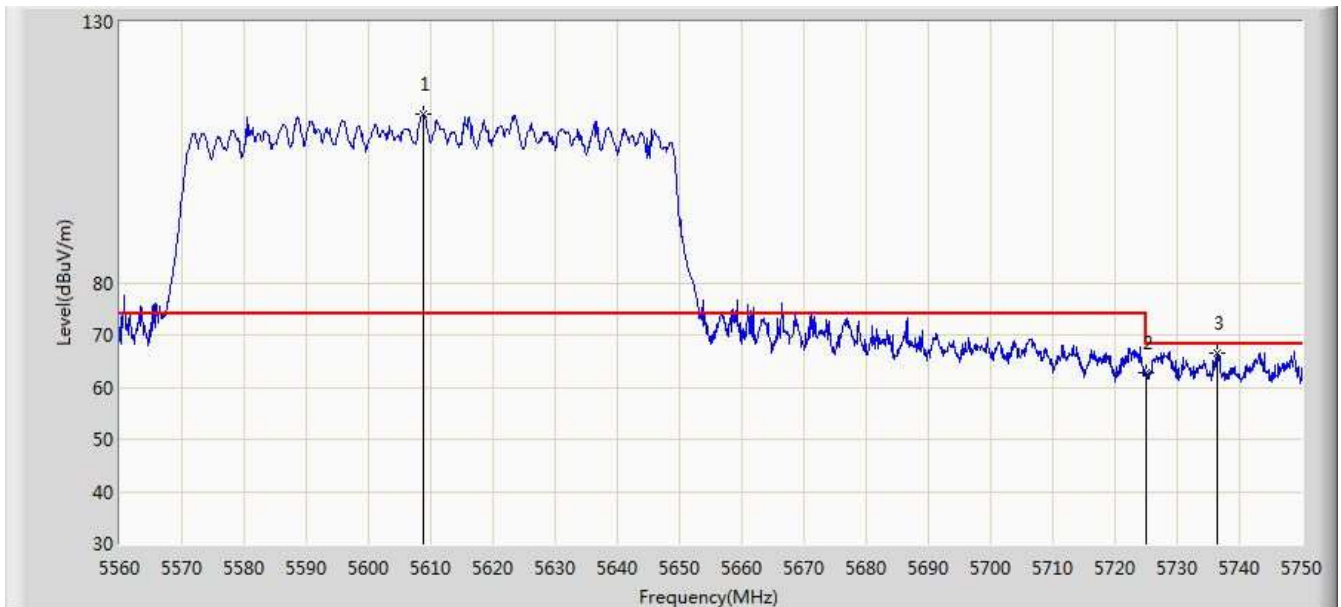


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5608.925	112.174	107.586	38.174	74.000	4.587	PK
2			5725.000	62.697	57.663	-5.503	68.200	5.034	PK
3			5736.510	66.624	61.546	-1.576	68.200	5.078	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2019/07/11 - 23:19
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D	Polarity: Horizontal
EUT: Aruba 500 接入點	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11ax-HE80 at channel 5775MHz Ant 0 + 1	

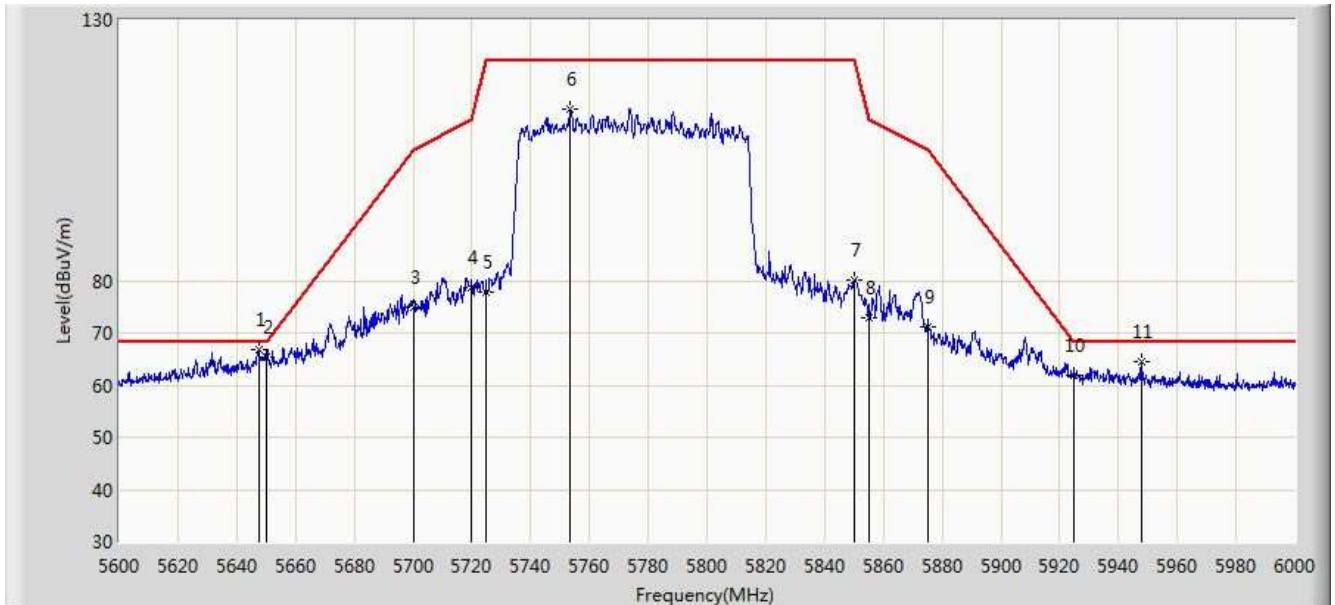


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5647.400	66.838	62.102	-1.362	68.200	4.736	PK
2			5650.000	65.221	60.475	-2.979	68.200	4.746	PK
3			5700.000	74.998	70.060	-30.202	105.200	4.938	PK
4			5720.000	78.705	73.690	-32.095	110.800	5.015	PK
5			5725.000	77.739	72.705	-44.461	122.200	5.034	PK
6			5753.600	112.987	107.844	N/A	N/A	5.143	PK
7			5850.000	80.046	74.532	-42.154	122.200	5.514	PK
8			5855.000	72.845	67.312	-37.955	110.800	5.533	PK
9			5875.000	71.190	65.580	-34.010	105.200	5.610	PK
10			5925.000	61.786	55.984	-6.414	68.200	5.802	PK
11			5947.800	64.591	58.701	-3.609	68.200	5.889	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2019/07/11 - 23:18
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D	Polarity: Vertical
EUT: Aruba 500 接入點	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11ax-HE80 at channel 5775MHz Ant 0 + 1	

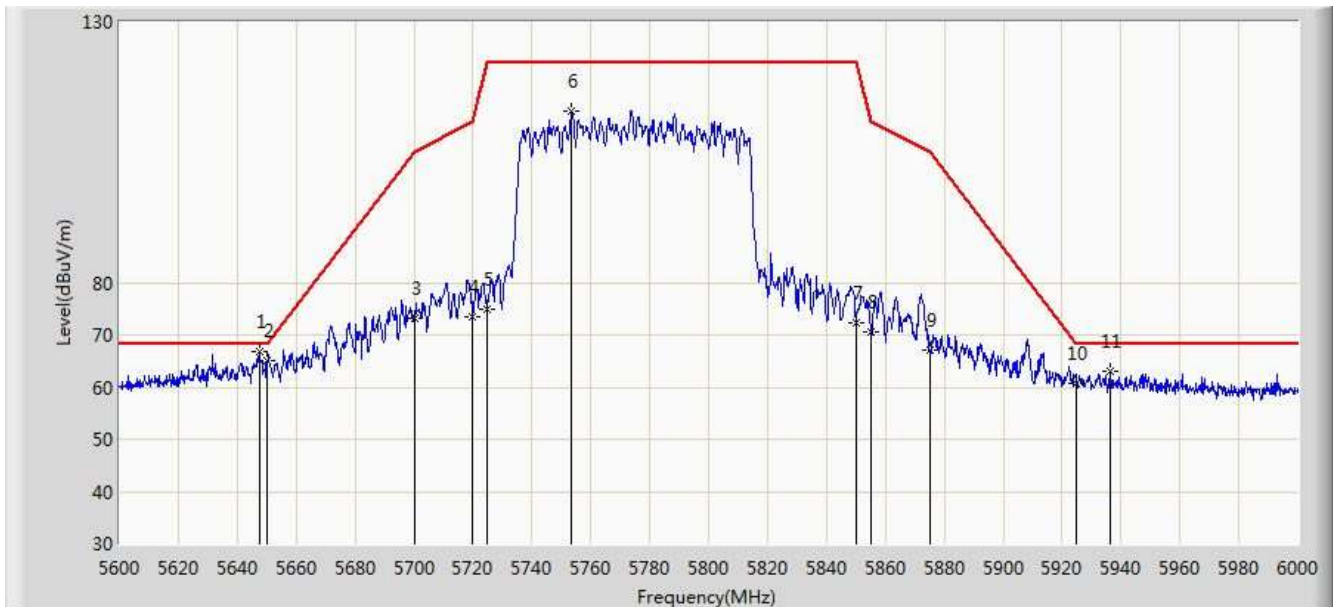


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5647.400	66.838	62.102	-1.362	68.200	4.736	PK
2			5650.000	64.937	60.191	-3.263	68.200	4.746	PK
3			5700.000	73.323	68.385	-31.877	105.200	4.938	PK
4			5720.000	73.535	68.520	-37.265	110.800	5.015	PK
5			5725.000	75.060	70.026	-47.140	122.200	5.034	PK
6			5753.600	112.987	107.844	N/A	N/A	5.143	PK
7			5850.000	72.276	66.762	-49.924	122.200	5.514	PK
8			5855.000	70.585	65.052	-40.215	110.800	5.533	PK
9			5875.000	67.107	61.497	-38.093	105.200	5.610	PK
10			5925.000	60.809	55.007	-7.391	68.200	5.802	PK
11			5936.200	62.903	57.058	-5.297	68.200	5.845	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

For APIN0505:

Site: AC1	Time: 2019/06/26 - 23:15
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D	Polarity: Horizontal
EUT: Aruba 500 接入點	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11a at channel 5180MHz Ant 0 + 1	

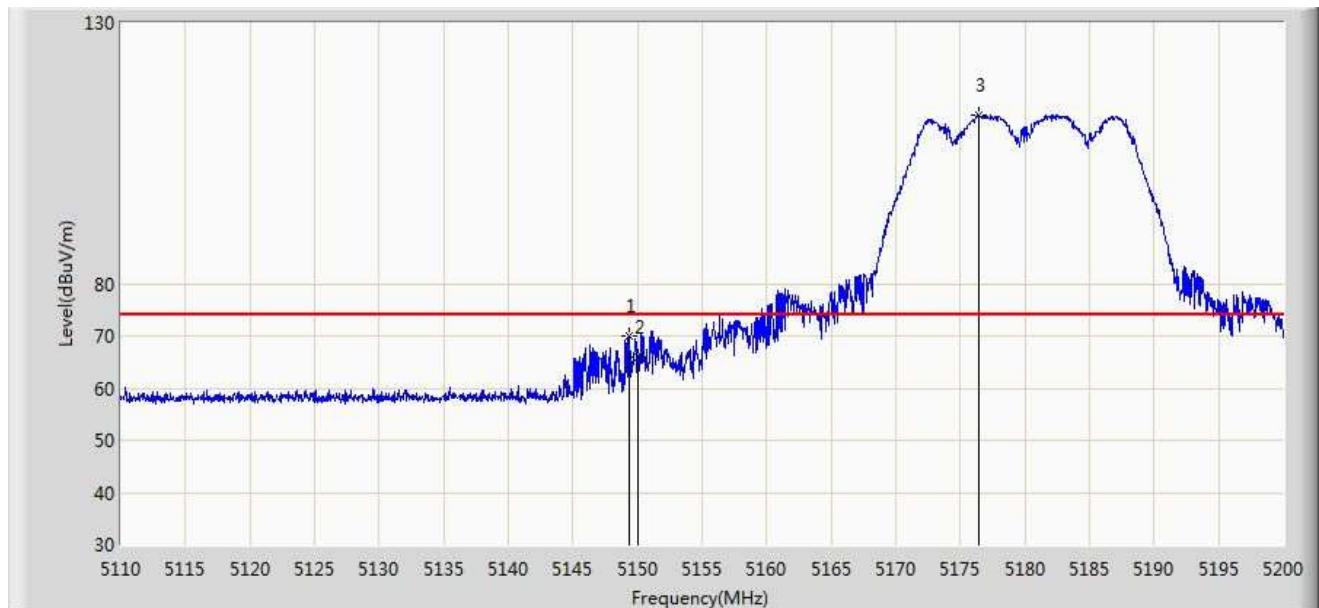


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5149.375	70.047	66.172	-3.953	74.000	3.875	PK
2			5150.000	65.865	61.989	-8.135	74.000	3.876	PK
3		*	5176.420	112.223	108.325	N/A	N/A	3.898	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2019/06/26 - 23:17
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D	Polarity: Horizontal
EUT: Aruba 500 接入點	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11a at channel 5180MHz Ant 0 + 1	

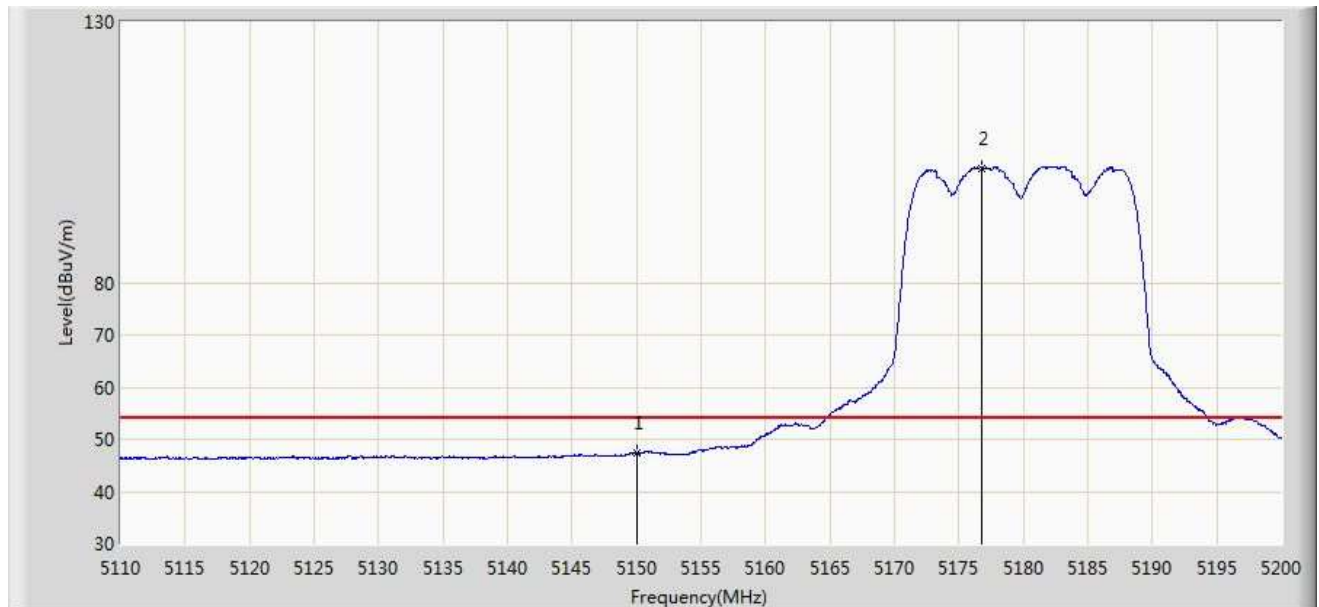


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	47.292	43.416	-6.708	54.000	3.876	AV
2		*	5176.735	102.027	98.128	N/A	N/A	3.899	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2019/06/26 - 23:14
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D	Polarity: Vertical
EUT: Aruba 500 接入點	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11a at channel 5180MHz Ant 0 + 1	

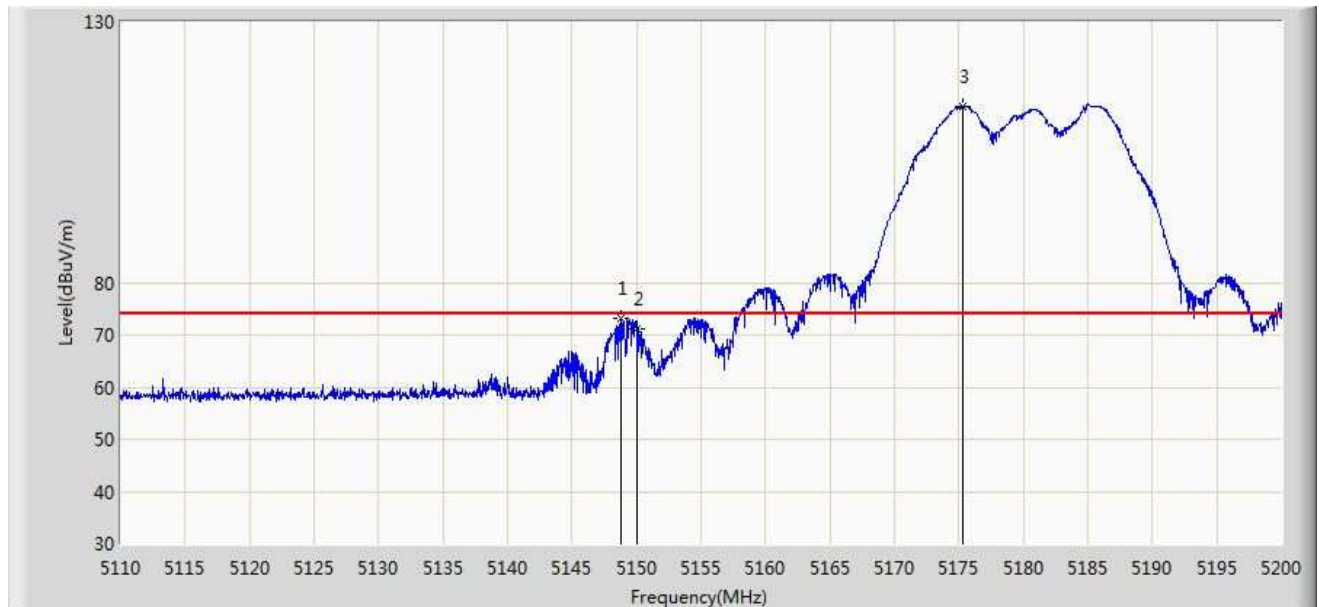


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5148.790	73.289	69.414	-0.711	74.000	3.875	PK
2			5150.000	71.188	67.312	-2.812	74.000	3.876	PK
3		*	5175.340	113.844	109.947	N/A	N/A	3.897	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2019/06/26 - 23:15
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Aruba 500 接入點	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11a at channel 5180MHz Ant 0 + 1	

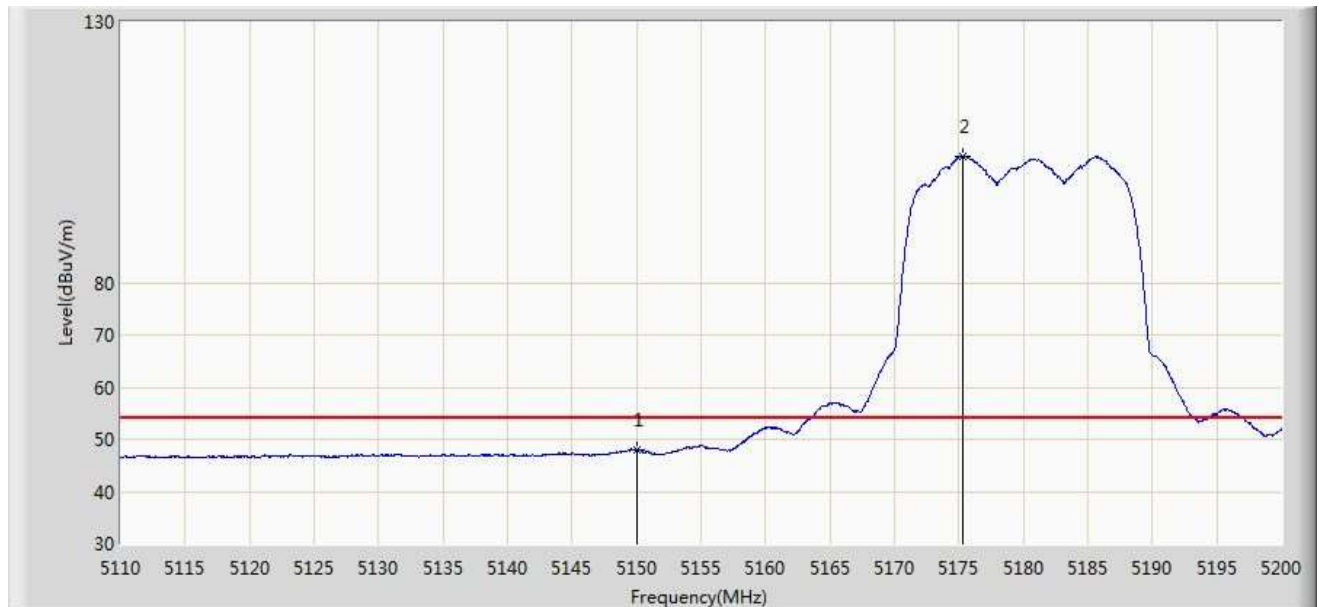


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	48.008	41.611	-5.992	54.000	6.398	AV
2		*	5175.340	104.272	97.747	N/A	N/A	6.525	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2019/06/26 - 23:20
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D	Polarity: Horizontal
EUT: Aruba 500 接入點	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11a at channel 5320MHz Ant 0 + 1	

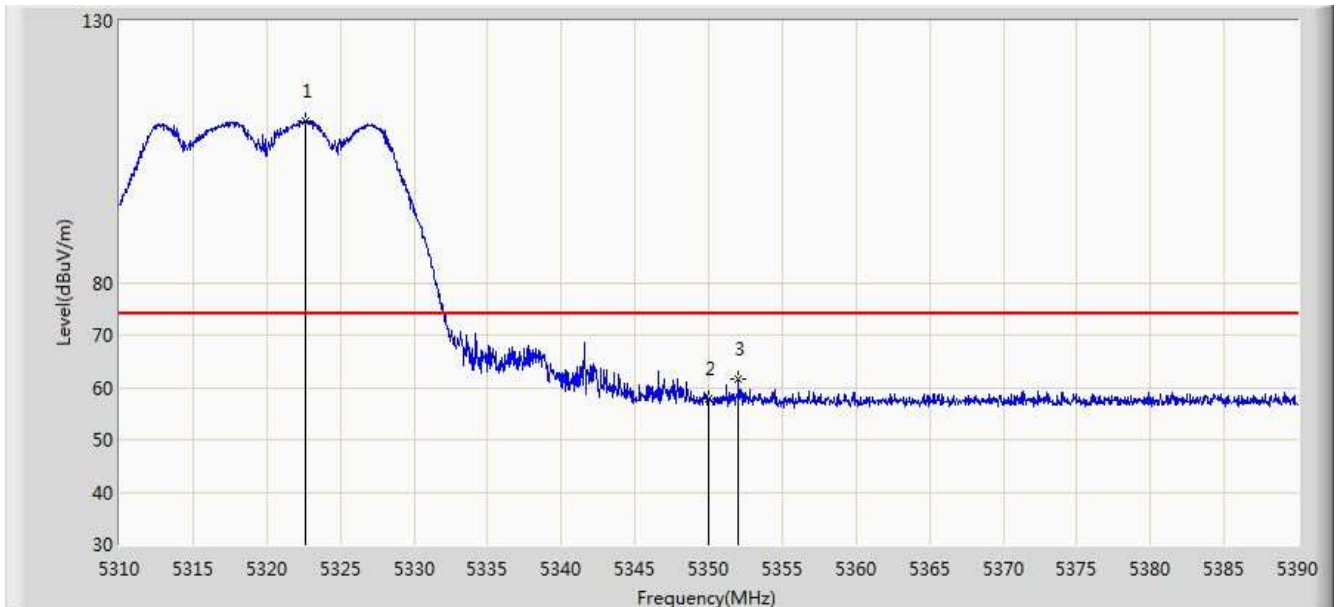


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5322.600	110.907	106.886	N/A	N/A	4.021	PK
2			5350.000	57.916	53.872	-16.084	74.000	4.044	PK
3			5352.000	61.549	57.503	-12.451	74.000	4.046	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2019/06/26 - 23:21
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D	Polarity: Horizontal
EUT: Aruba 500 接入點	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11a at channel 5320MHz Ant 0 + 1	

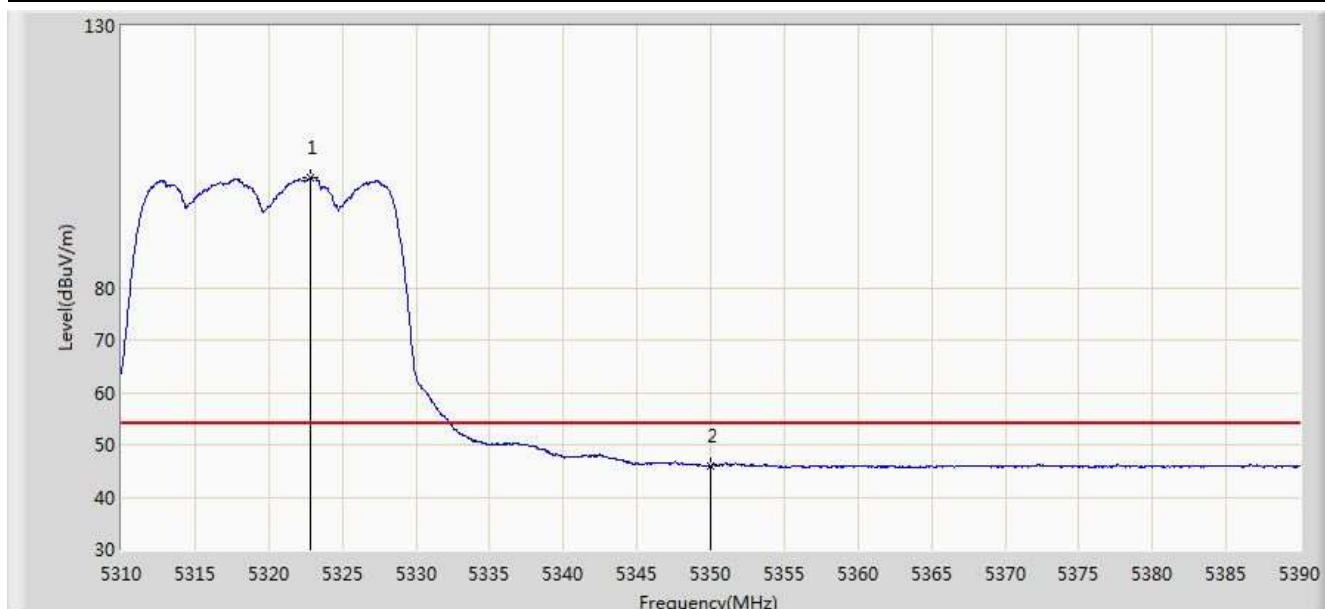


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5322.840	101.021	97.000	N/A	N/A	4.021	AV
2			5350.000	46.074	42.030	-7.926	54.000	4.044	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2019/06/26 - 23:18
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D	Polarity: Vertical
EUT: Aruba 500 接入點	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11a at channel 5320MHz Ant 0 + 1	

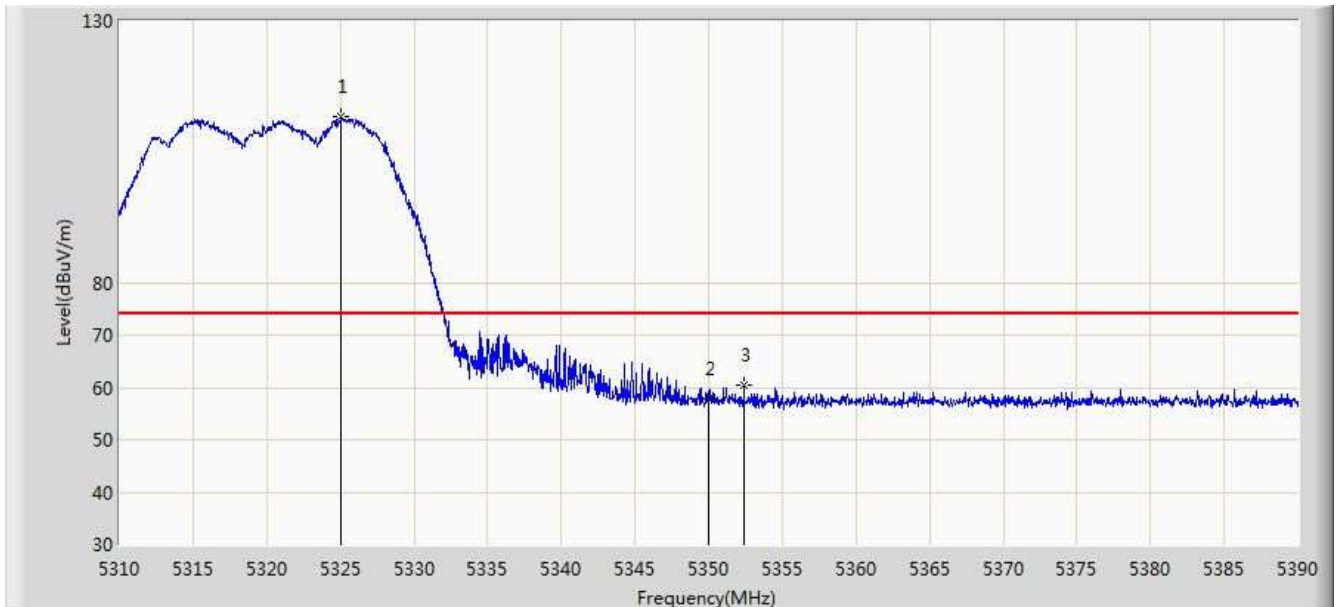


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5325.040	111.756	107.733	N/A	N/A	4.023	PK
2			5350.000	57.781	53.737	-16.219	74.000	4.044	PK
3			5352.400	60.406	56.360	-13.594	74.000	4.046	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2019/06/26 - 23:20
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D	Polarity: Vertical
EUT: Aruba 500 接入點	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11a at channel 5320MHz Ant 0 + 1	

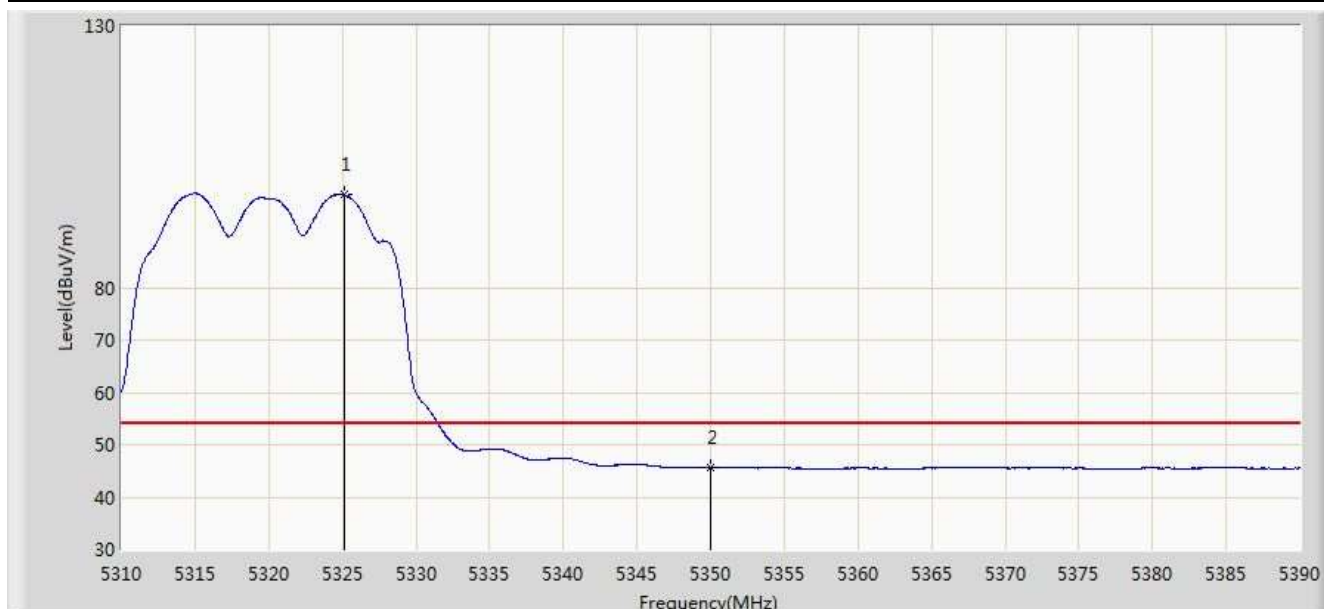


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5325.120	97.683	93.660	N/A	N/A	4.023	AV
2			5350.000	45.698	41.654	-8.302	54.000	4.044	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2019/06/26 - 23:25
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D	Polarity: Horizontal
EUT: Aruba 500 接入點	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11a at channel 5500MHz Ant 0 + 1	

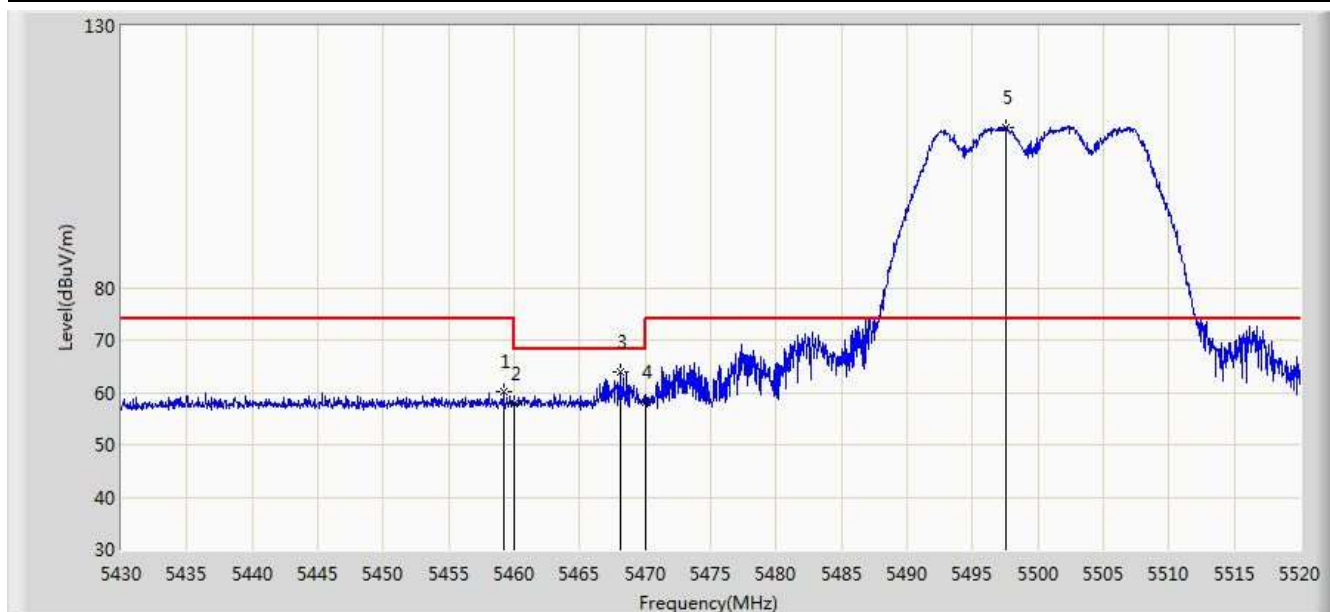


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5459.160	60.002	55.867	-13.998	74.000	4.135	PK
2			5460.000	57.842	53.706	-16.158	74.000	4.136	PK
3			5468.115	63.869	59.726	-4.331	68.200	4.143	PK
4			5470.000	58.164	54.020	-10.036	68.200	4.144	PK
5		*	5497.590	110.659	106.482	N/A	N/A	4.177	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2019/06/26 - 23:26
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D	Polarity: Horizontal
EUT: Aruba 500 接入點	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11a at channel 5500MHz Ant 0 + 1	

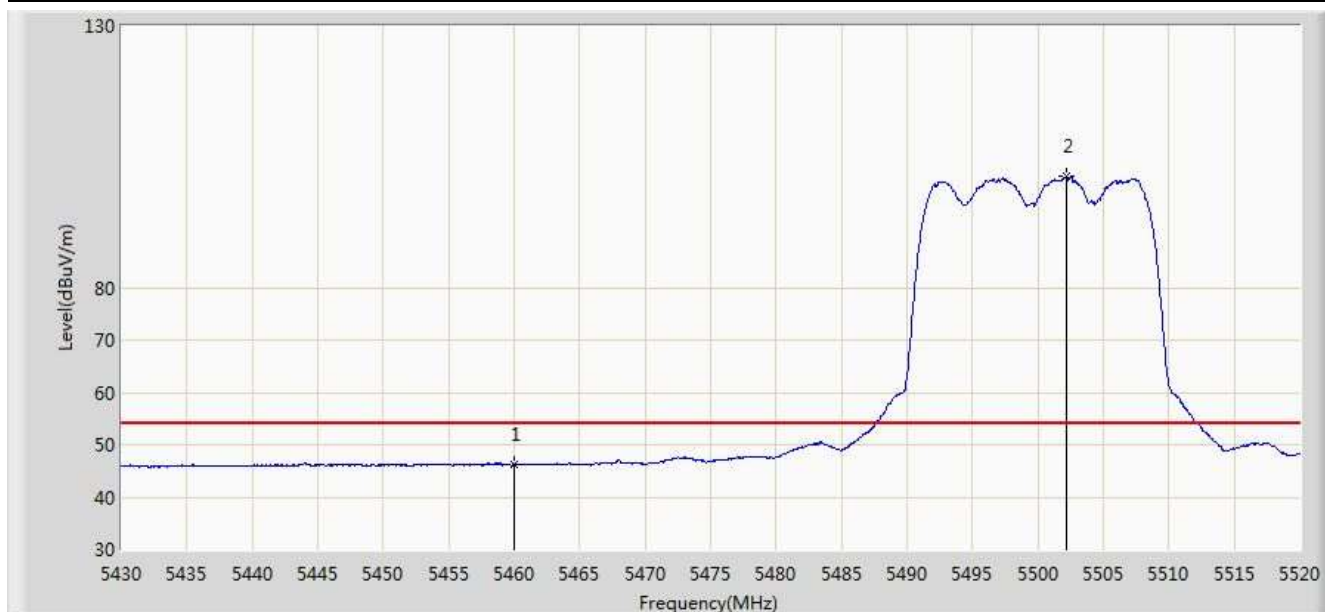


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	46.234	42.098	-7.766	54.000	4.136	AV
2		*	5502.180	101.291	97.106	N/A	N/A	4.185	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2019/06/26 - 23:24
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D	Polarity: Vertical
EUT: Aruba 500 接入點	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11a at channel 5500MHz Ant 0 + 1	

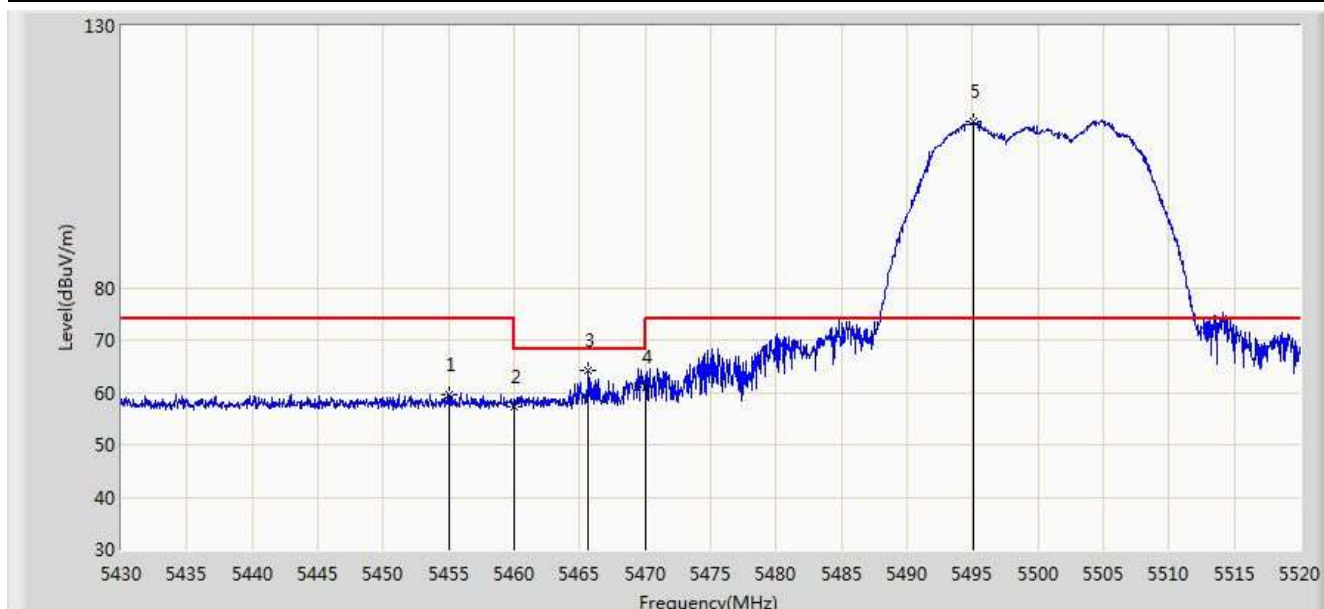


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5455.020	59.695	55.563	-14.305	74.000	4.132	PK
2			5460.000	57.391	53.255	-16.609	74.000	4.136	PK
3			5465.685	64.328	60.187	-3.872	68.200	4.141	PK
4			5470.000	60.957	56.813	-7.243	68.200	4.144	PK
5		*	5495.025	111.625	107.453	N/A	N/A	4.172	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2019/06/26 - 23:25
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D	Polarity: Vertical
EUT: Aruba 500 接入點	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11a at channel 5500MHz Ant 0 + 1	

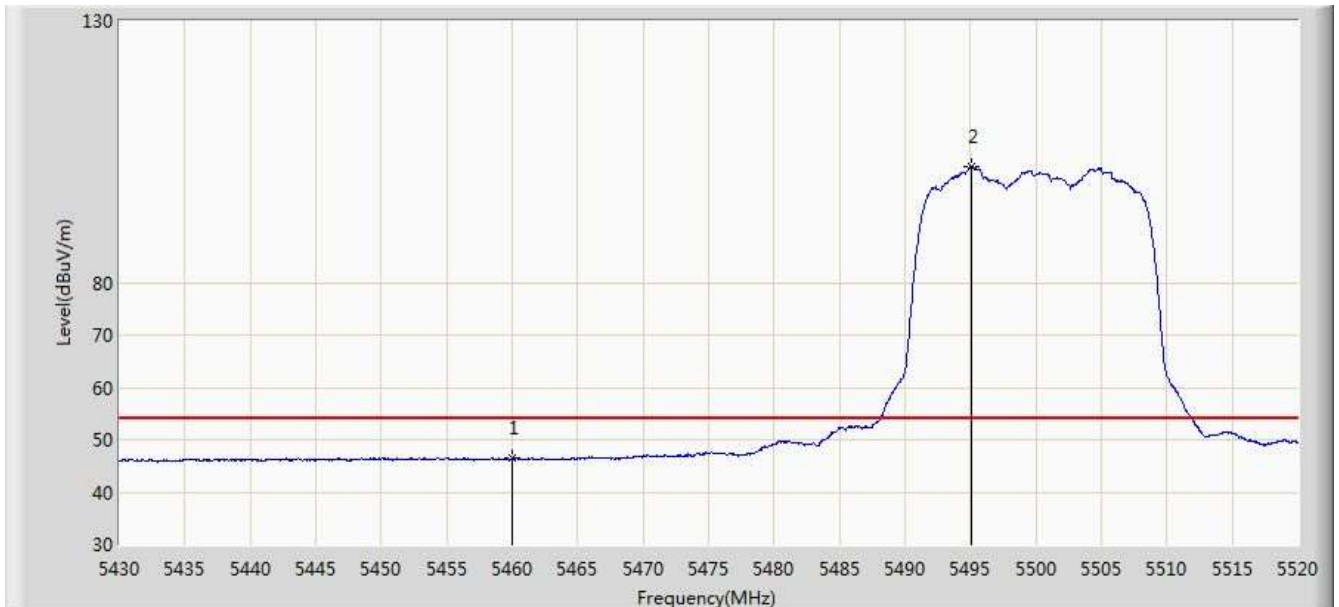


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	46.392	42.256	-7.608	54.000	4.136	AV
2		*	5495.025	102.219	98.047	N/A	N/A	4.172	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2019/06/26 - 23:29
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D	Polarity: Horizontal
EUT: Aruba 500 接入點	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11a at channel 5700MHz Ant 0 + 1	

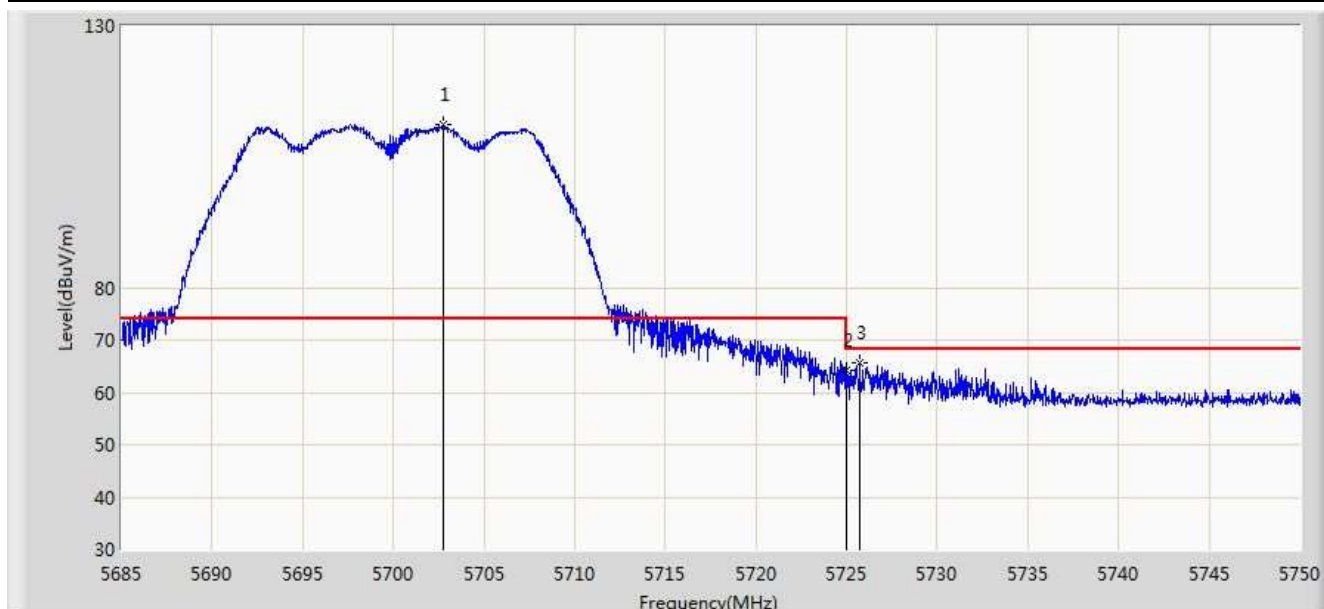


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5702.745	111.033	106.084	N/A	N/A	4.948	PK
2			5725.000	64.063	59.029	-4.137	68.200	5.034	PK
3			5725.723	65.601	60.564	-2.599	68.200	5.036	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2019/06/26 - 23:27
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D	Polarity: Vertical
EUT: Aruba 500 接入點	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11a at channel 5700MHz Ant 0 + 1	

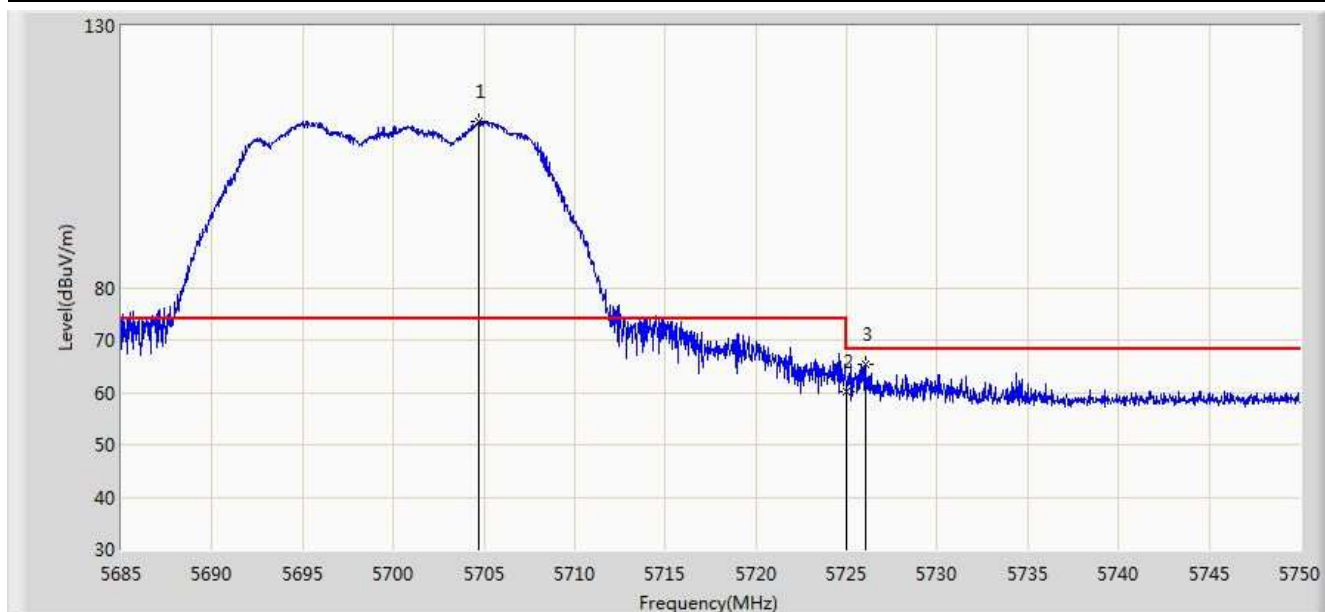


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5704.695	111.854	106.898	N/A	N/A	4.956	PK
2			5725.000	60.184	55.150	-8.016	68.200	5.034	PK
3			5726.047	65.228	60.190	-2.972	68.200	5.038	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2019/07/14 - 13:22
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D	Polarity: Horizontal
EUT: Aruba 500 接入點	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11a at channel 5745MHz Ant 0 + 1	

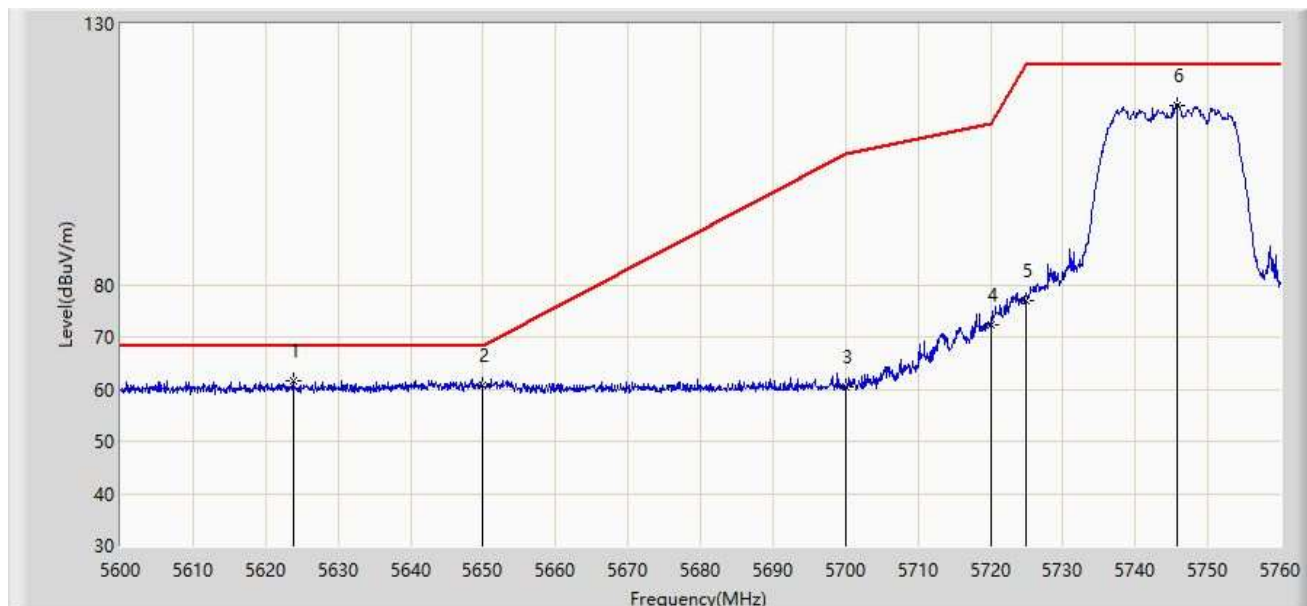


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5623.760	61.592	56.947	-6.608	68.200	4.646	PK
2			5650.000	60.694	55.948	-7.506	68.200	4.746	PK
3			5700.000	60.519	55.581	-44.681	105.200	4.938	PK
4			5720.000	72.297	67.282	-38.503	110.800	5.015	PK
5			5725.000	77.047	72.013	-45.153	122.200	5.034	PK
6			5745.680	114.426	109.313	N/A	N/A	5.113	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2019/07/14 - 13:26
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D	Polarity: Vertical
EUT: Aruba 500 接入點	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11a at channel 5745MHz Ant 0 + 1	

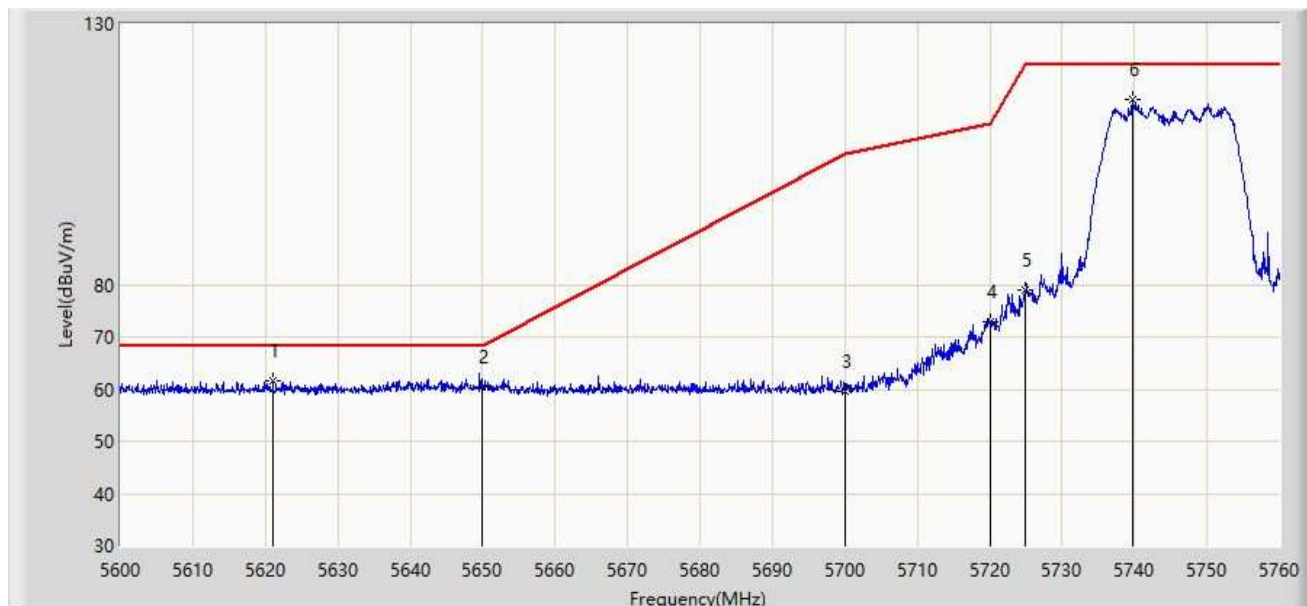


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5621.040	61.511	56.876	-6.689	68.200	4.634	PK
2			5650.000	60.448	55.702	-7.752	68.200	4.746	PK
3			5700.000	59.499	54.561	-45.701	105.200	4.938	PK
4			5720.000	72.935	67.920	-37.865	110.800	5.015	PK
5			5725.000	79.031	73.997	-43.169	122.200	5.034	PK
6		*	5739.840	115.556	110.465	N/A	N/A	5.090	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)


Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2019/06/26 - 23:35
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D	Polarity: Horizontal
EUT: Aruba 500 接入點	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11a at channel 5825MHz Ant 0 + 1	

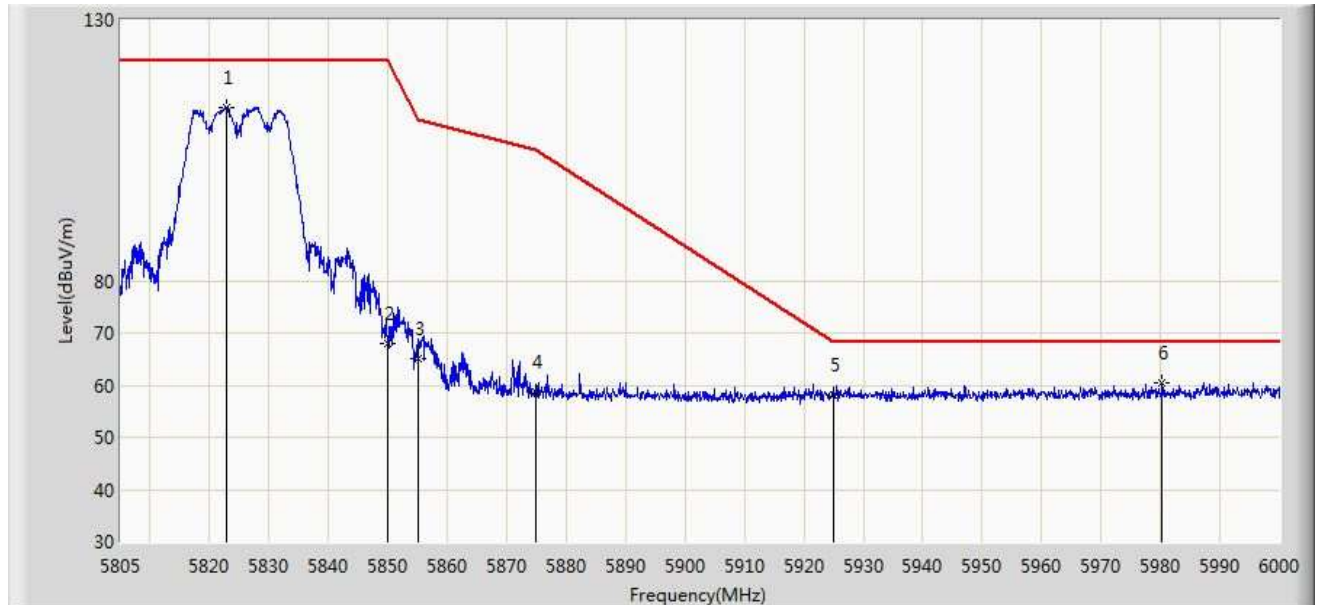


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor(dB)	Type
1			5822.745	113.122	107.712	-9.078	122.200	5.410	PK
2			5850.000	67.967	62.453	-54.233	122.200	5.514	PK
3			5855.000	65.042	59.509	-45.758	110.800	5.533	PK
4			5875.000	58.568	52.958	-46.632	105.200	5.610	PK
5			5925.000	58.027	52.225	-10.173	68.200	5.802	PK
6		*	5980.208	60.530	54.516	-7.670	68.200	6.015	PK

Site: AC1	Time: 2019/06/26 - 23:36
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D	Polarity: Vertical
EUT: Aruba 500 接入點	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11a at channel 5825MHz Ant 0 + 1	

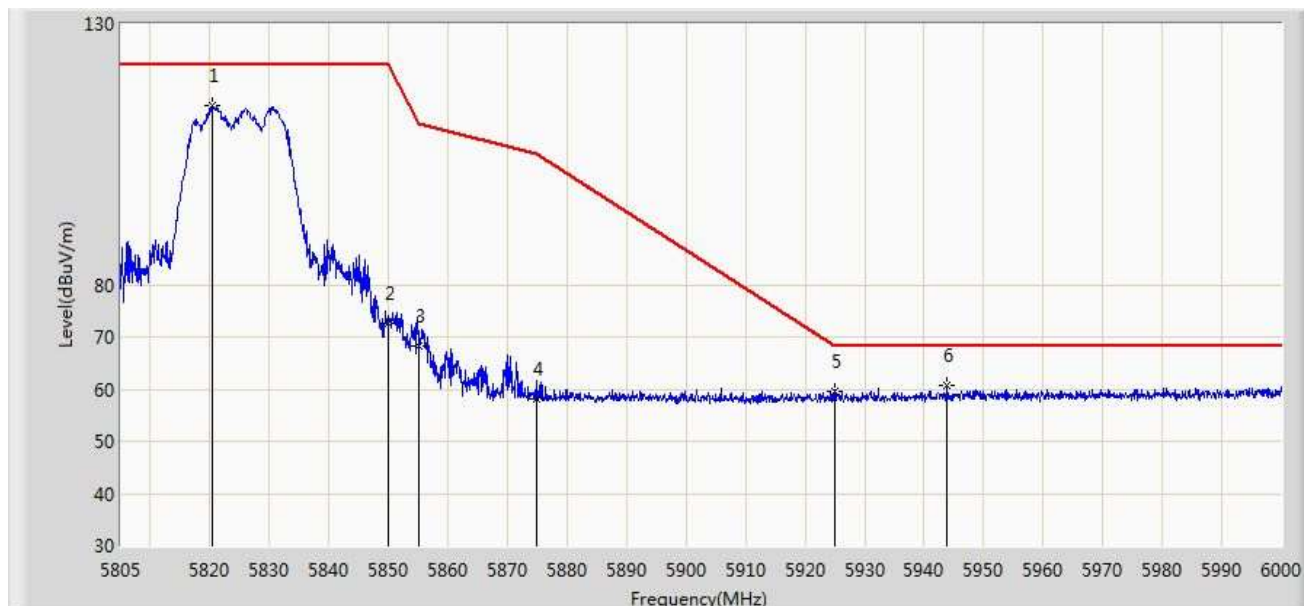

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5820.308	114.257	108.857	-7.943	122.200	5.399	PK
2			5850.000	72.577	67.063	-49.623	122.200	5.514	PK
3			5855.000	68.248	62.715	-42.552	110.800	5.533	PK
4			5875.000	58.171	52.561	-47.029	105.200	5.610	PK
5			5925.000	59.423	53.621	-8.777	68.200	5.802	PK
6		*	5943.840	60.714	54.839	-7.486	68.200	5.874	PK

Site: AC1	Time: 2019/07/02 - 05:31
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D	Polarity: Horizontal
EUT: Aruba 500 接入點	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at channel 5180MHz Ant 0 + 1	

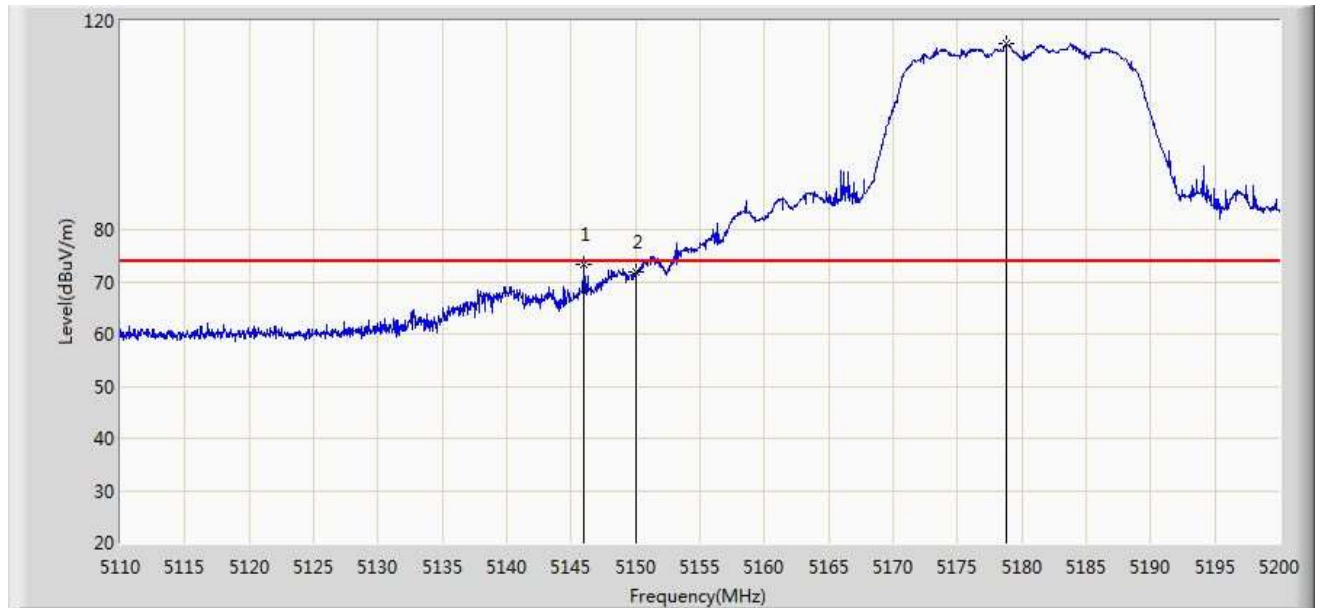

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5146.000	73.306	69.434	-0.694	74.000	3.872	PK
2			5150.000	71.826	67.950	-2.174	74.000	3.876	PK
3		*	5178.805	115.710	111.810	N/A	N/A	3.900	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2019/07/02 - 05:32
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D	Polarity: Horizontal
EUT: Aruba 500 接入點	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at channel 5180MHz Ant 0 + 1	




No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	52.057	48.181	-1.943	54.000	3.876	AV
2		*	5179.075	103.481	99.580	N/A	N/A	3.901	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2019/07/02 - 05:33
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D	Polarity: Vertical
EUT: Aruba 500 接入點	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at channel 5180MHz Ant 0 + 1	

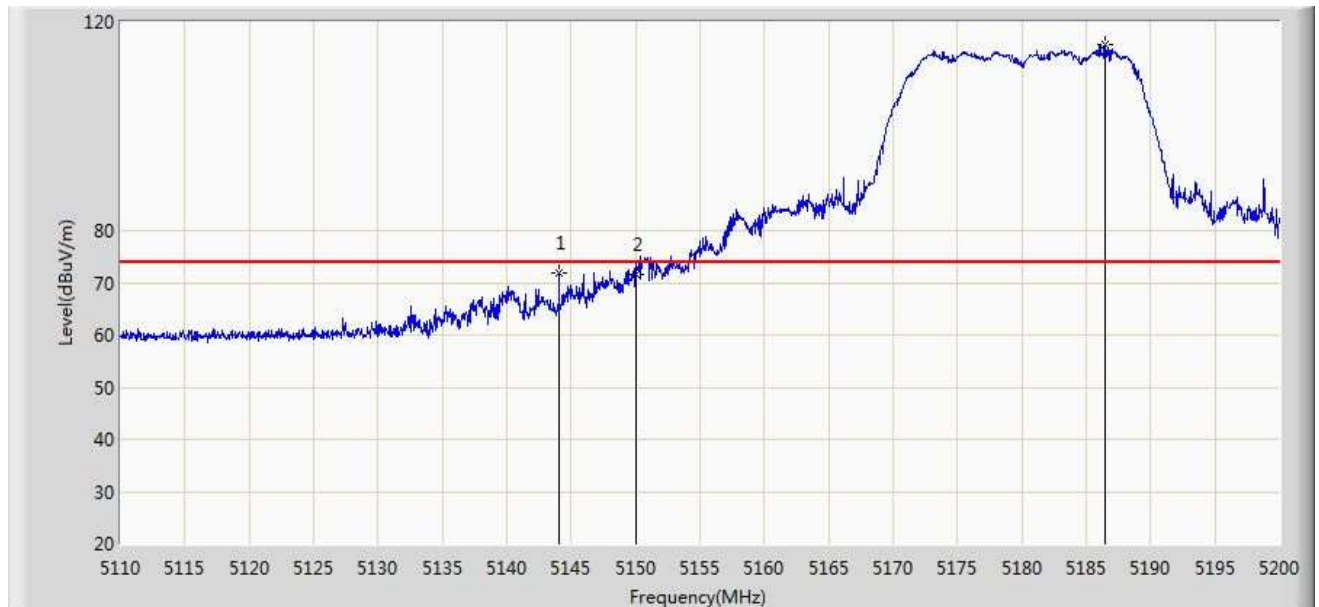

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5144.065	71.957	68.086	-2.043	74.000	3.871	PK
2			5150.000	71.505	67.629	-2.495	74.000	3.876	PK
3		*	5186.410	115.690	111.783	N/A	N/A	3.907	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2019/07/02 - 05:36
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D	Polarity: Vertical
EUT: Aruba 500 接入點	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at channel 5180MHz Ant 0 + 1	




No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	52.145	48.269	-1.855	54.000	3.876	AV
2		*	5178.670	103.149	99.249	N/A	N/A	3.900	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2019/06/26 - 23:53
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D	Polarity: Horizontal
EUT: Aruba 500 接入點	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at channel 5320MHz Ant 0 + 1	

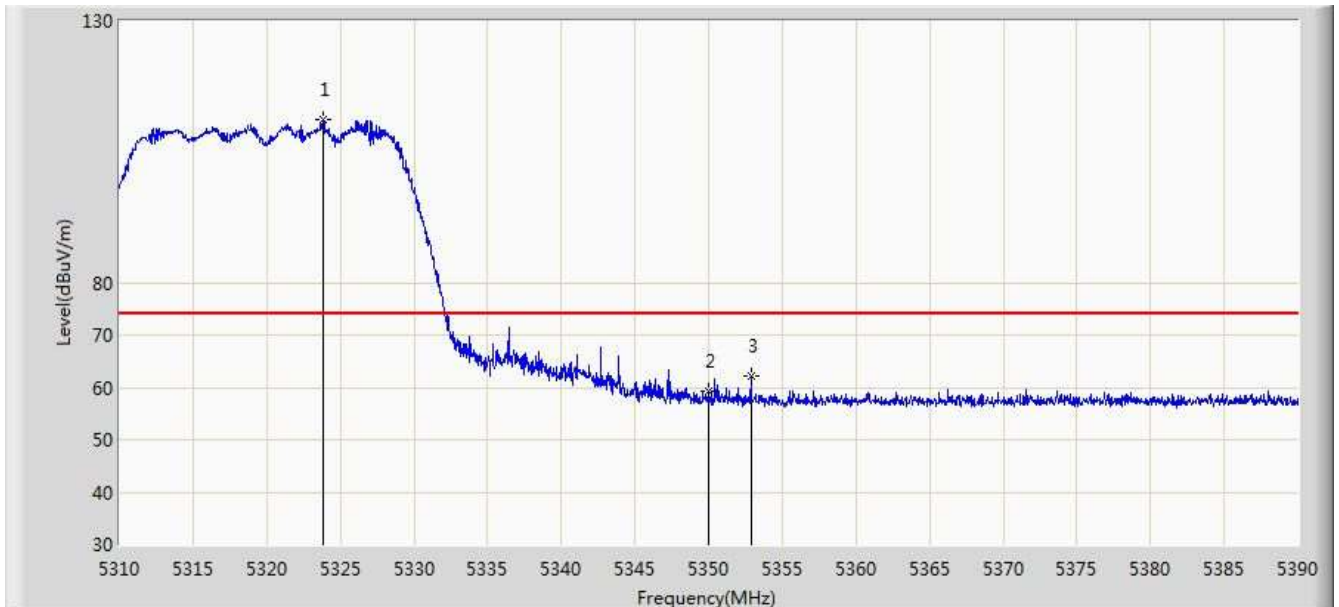


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5323.880	111.016	106.994	N/A	N/A	4.022	PK
2			5350.000	59.356	55.312	-14.644	74.000	4.044	PK
3			5352.880	62.141	58.094	-11.859	74.000	4.047	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2019/06/26 - 23:55
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D	Polarity: Horizontal
EUT: Aruba 500 接入點	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at channel 5320MHz Ant 0 + 1	

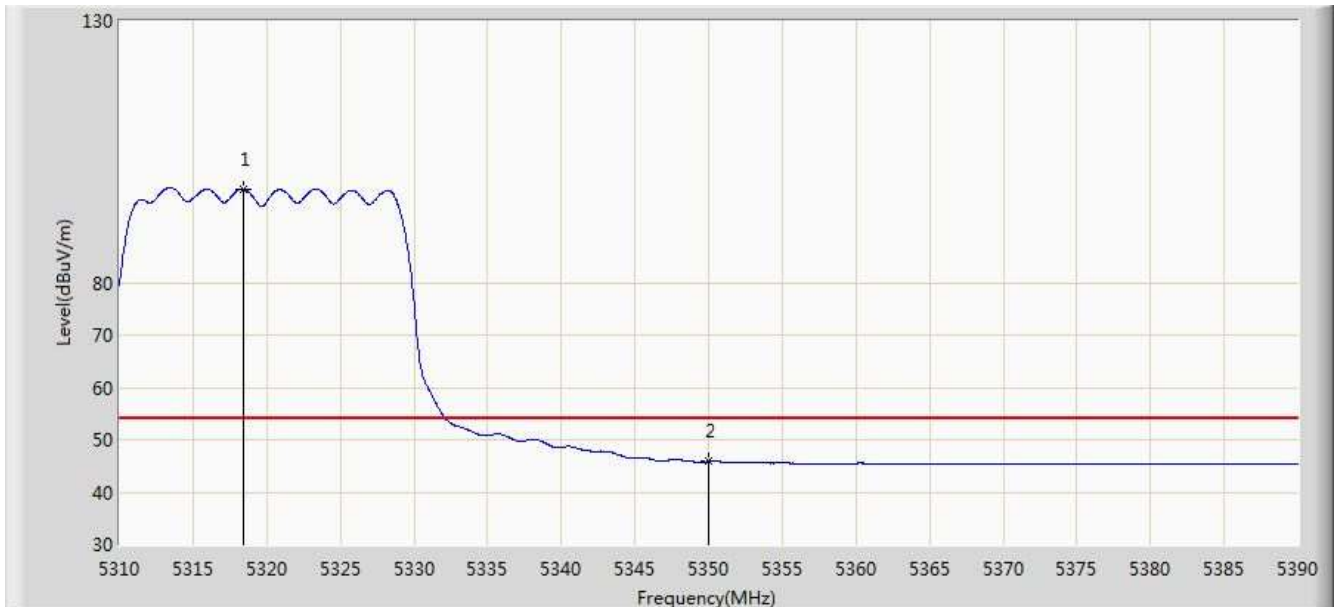


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5318.400	97.902	93.885	N/A	N/A	4.017	AV
2			5350.000	45.833	41.789	-8.167	54.000	4.044	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2019/06/26 - 23:51
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D	Polarity: Vertical
EUT: Aruba 500 接入點	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at channel 5320MHz Ant 0 + 1	

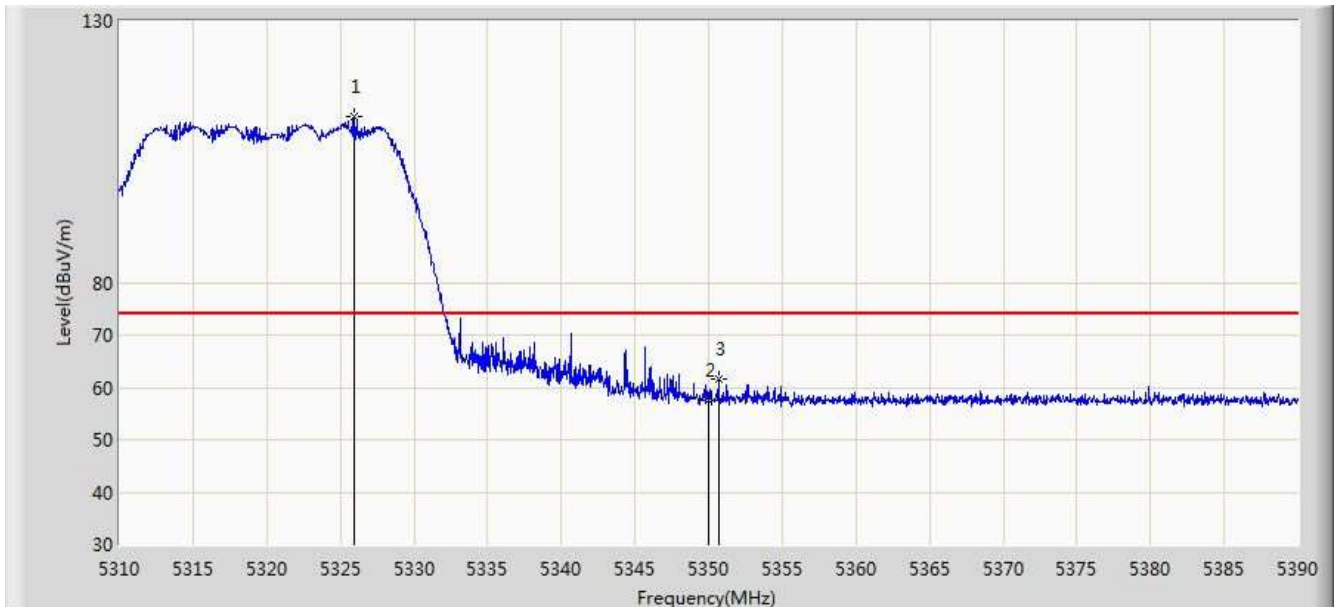


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5325.920	111.687	107.663	N/A	N/A	4.024	PK
2			5350.000	57.633	53.589	-16.367	74.000	4.044	PK
3			5350.680	61.583	57.538	-12.417	74.000	4.045	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2019/06/26 - 23:53
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D	Polarity: Vertical
EUT: Aruba 500 接入點	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at channel 5320MHz Ant 0 + 1	

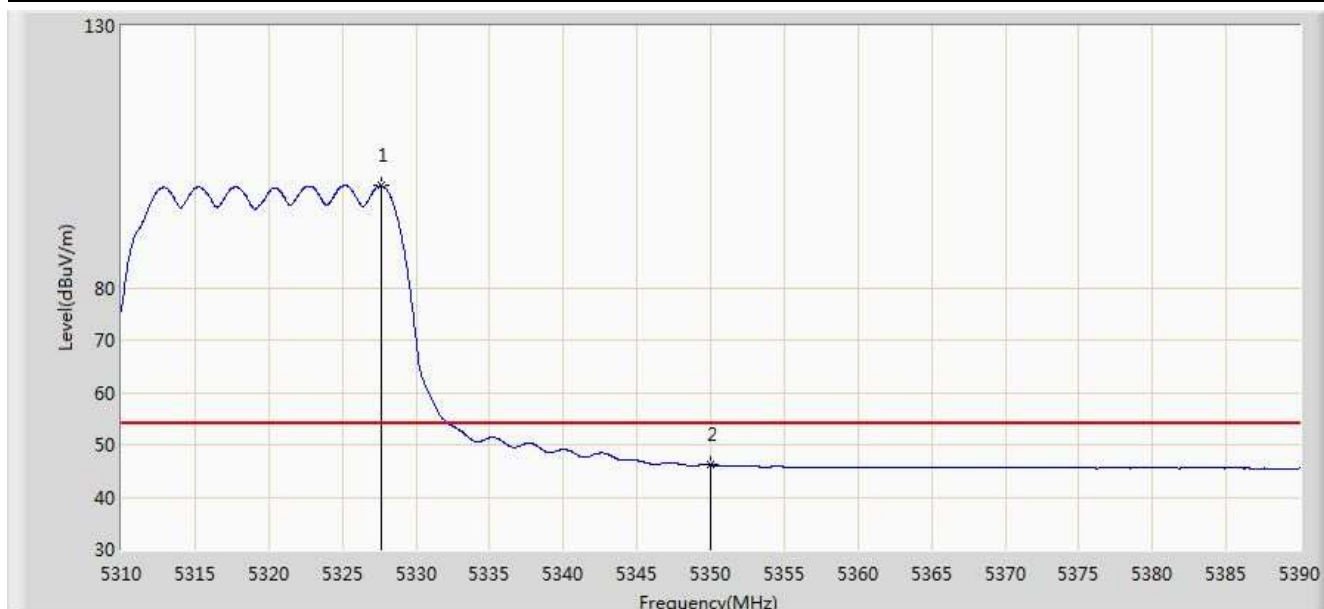


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5327.640	99.458	95.432	N/A	N/A	4.026	AV
2			5350.000	46.175	42.131	-7.825	54.000	4.044	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2019/06/26 - 23:57
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D	Polarity: Horizontal
EUT: Aruba 500 接入點	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at channel 5500MHz Ant 0 + 1	

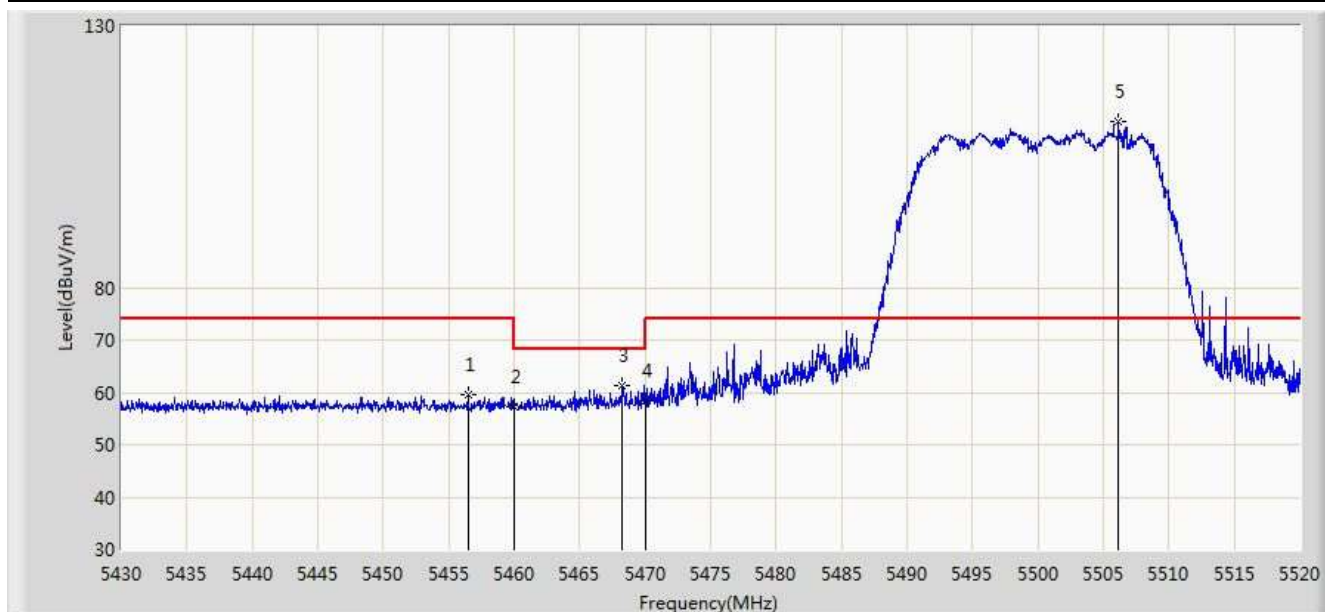


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5456.460	59.621	55.488	-14.379	74.000	4.133	PK
2			5460.000	57.366	53.230	-16.634	74.000	4.136	PK
3			5468.250	61.344	57.201	-6.856	68.200	4.143	PK
4			5470.000	58.470	54.326	-9.730	68.200	4.144	PK
5		*	5506.140	111.744	107.550	N/A	N/A	4.193	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2019/06/26 - 23:58
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D	Polarity: Horizontal
EUT: Aruba 500 接入點	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at channel 5500MHz Ant 0 + 1	

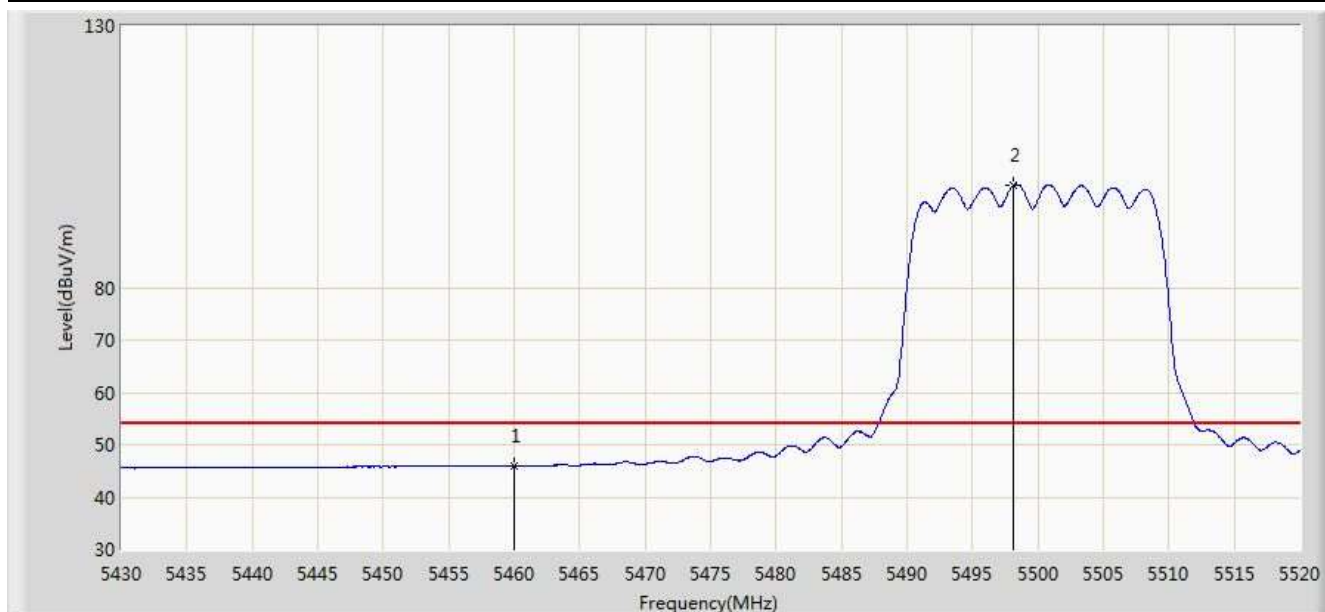


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	46.006	41.870	-7.994	54.000	4.136	AV
2		*	5498.085	99.428	95.250	N/A	N/A	4.178	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2019/06/26 - 23:55
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D	Polarity: Vertical
EUT: Aruba 500 接入點	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at channel 5500MHz Ant 0 + 1	

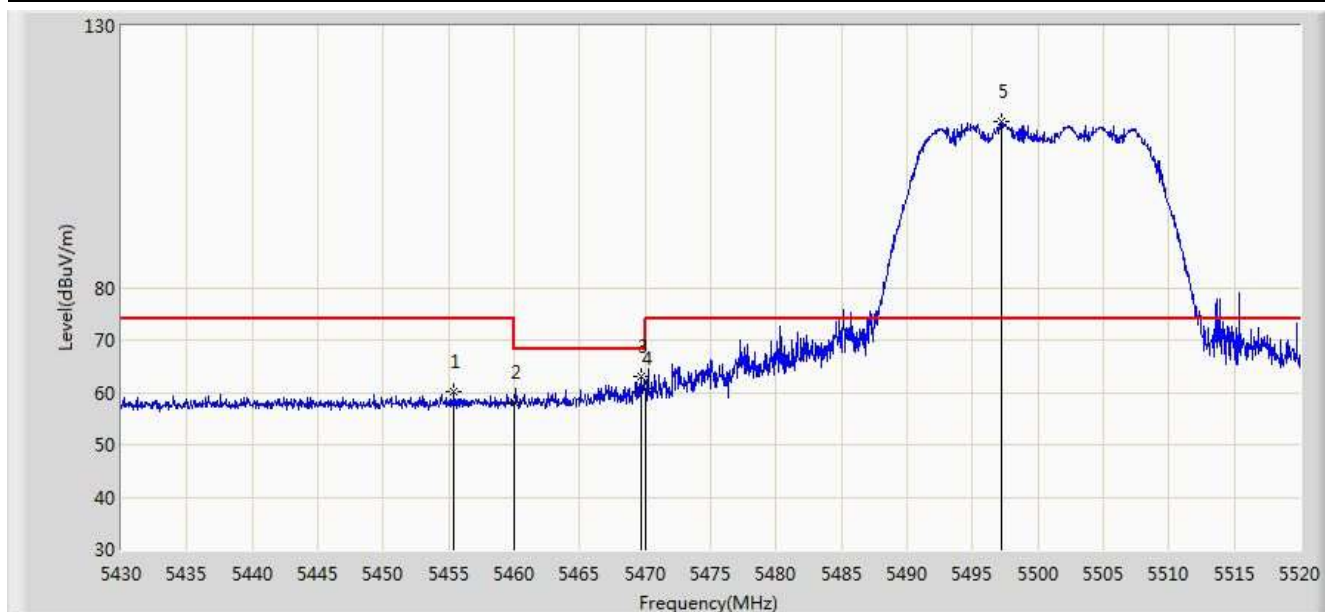


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5455.425	60.140	56.008	-13.860	74.000	4.132	PK
2			5460.000	58.028	53.892	-15.972	74.000	4.136	PK
3			5469.735	63.150	59.006	-5.050	68.200	4.144	PK
4			5470.000	60.631	56.487	-7.569	68.200	4.144	PK
5		*	5497.230	111.789	107.613	N/A	N/A	4.177	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2019/06/26 - 23:57
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D	Polarity: Vertical
EUT: Aruba 500 接入點	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at channel 5500MHz Ant 0 + 1	

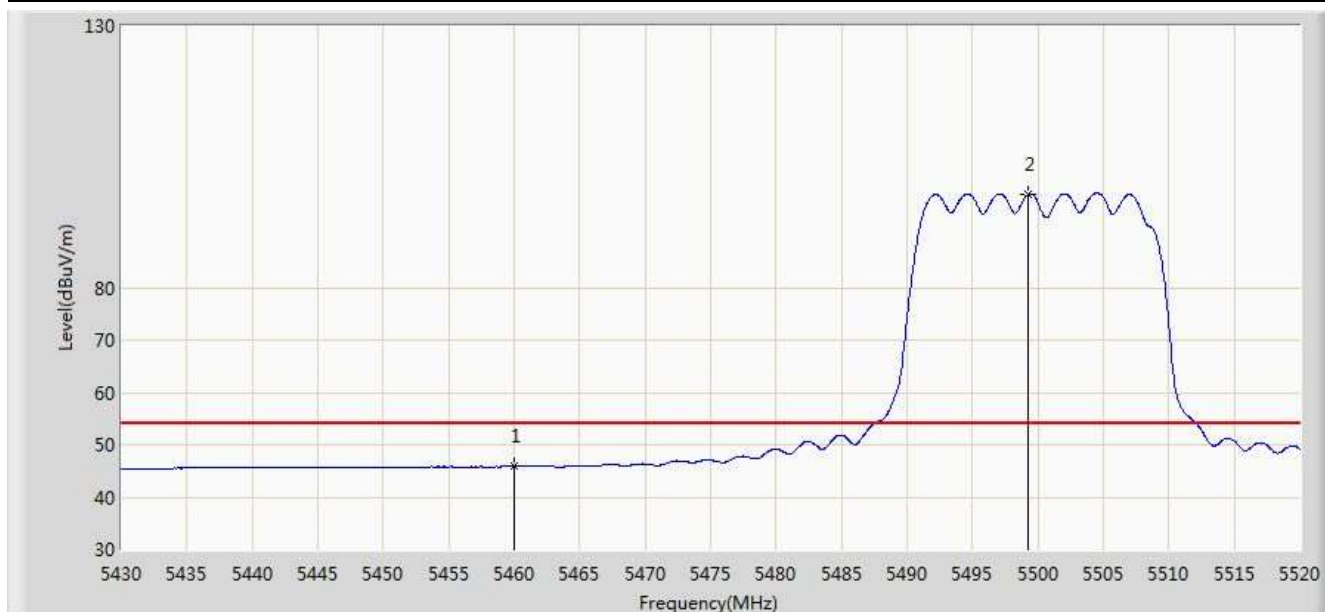


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	45.917	41.781	-8.083	54.000	4.136	AV
2		*	5499.300	97.862	93.682	N/A	N/A	4.180	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2019/06/27 - 00:01
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D	Polarity: Horizontal
EUT: Aruba 500 接入點	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at channel 5700MHz Ant 0 + 1	

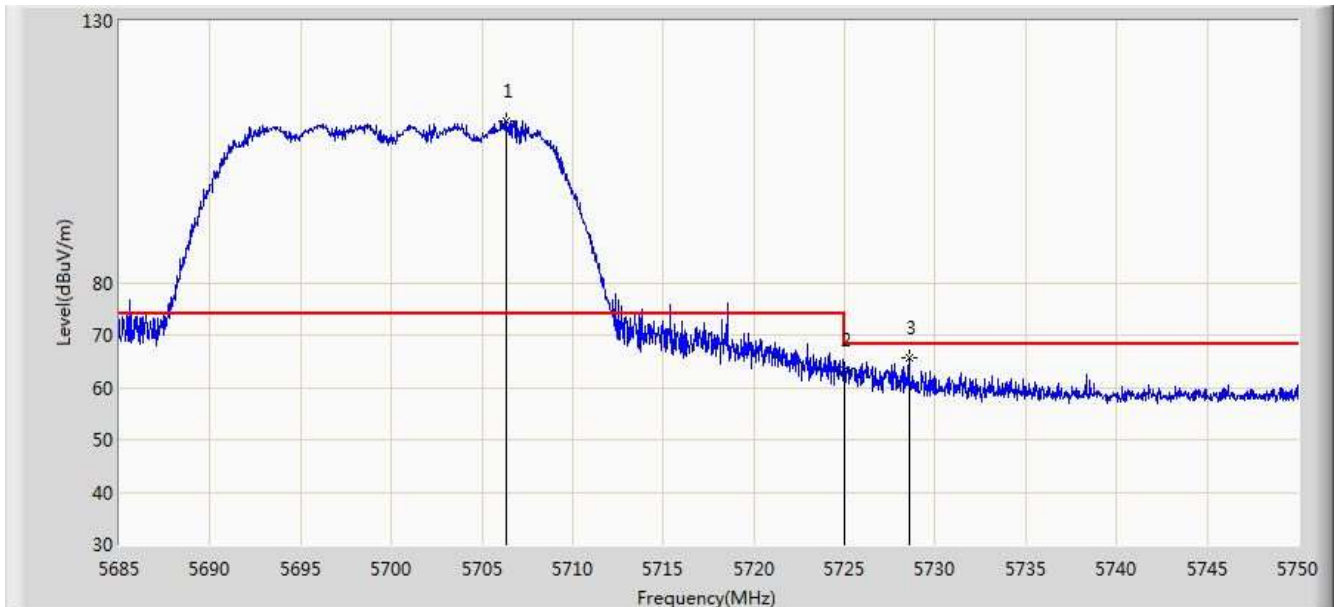


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5706.353	110.916	105.954	N/A	N/A	4.962	PK
2			5725.000	63.254	58.220	-4.946	68.200	5.034	PK
3			5728.550	65.735	60.688	-2.465	68.200	5.047	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2019/06/27 - 00:00
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D	Polarity: Vertical
EUT: Aruba 500 接入點	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at channel 5700MHz Ant 0 + 1	

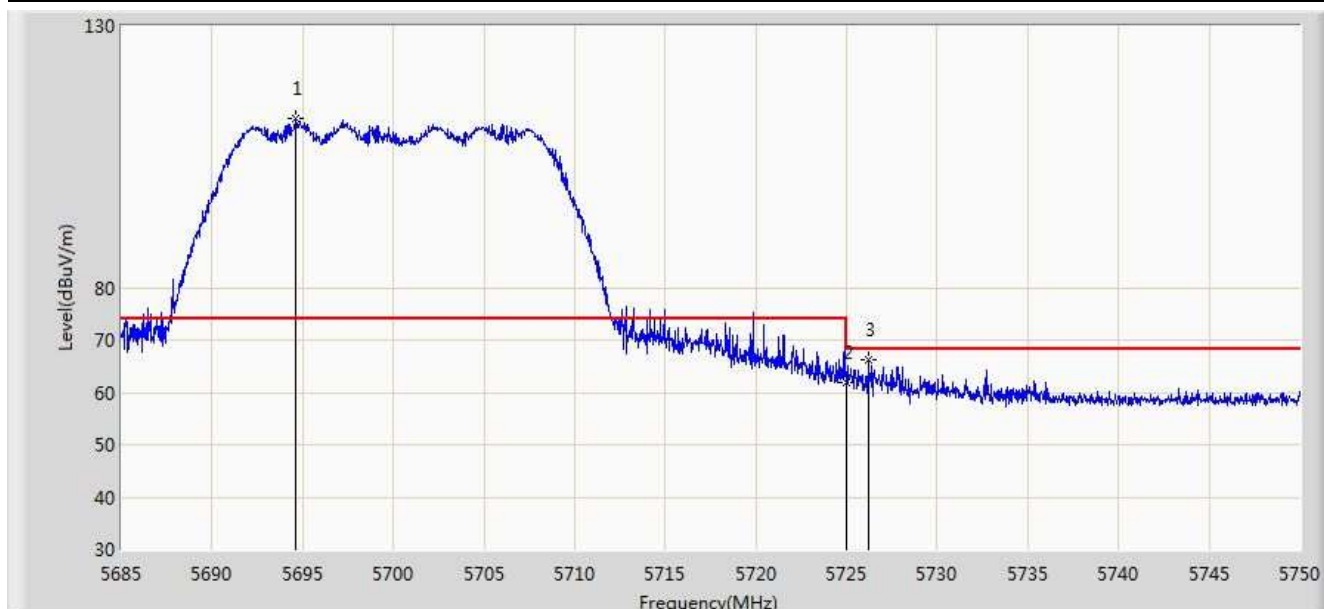


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5694.620	112.235	107.318	N/A	N/A	4.918	PK
2			5725.000	61.905	56.871	-6.295	68.200	5.034	PK
3			5726.178	66.096	61.058	-2.104	68.200	5.038	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2019/07/14 - 13:27
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D	Polarity: Horizontal
EUT: Aruba 500 接入點	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at channel 5745MHz Ant 0 + 1	

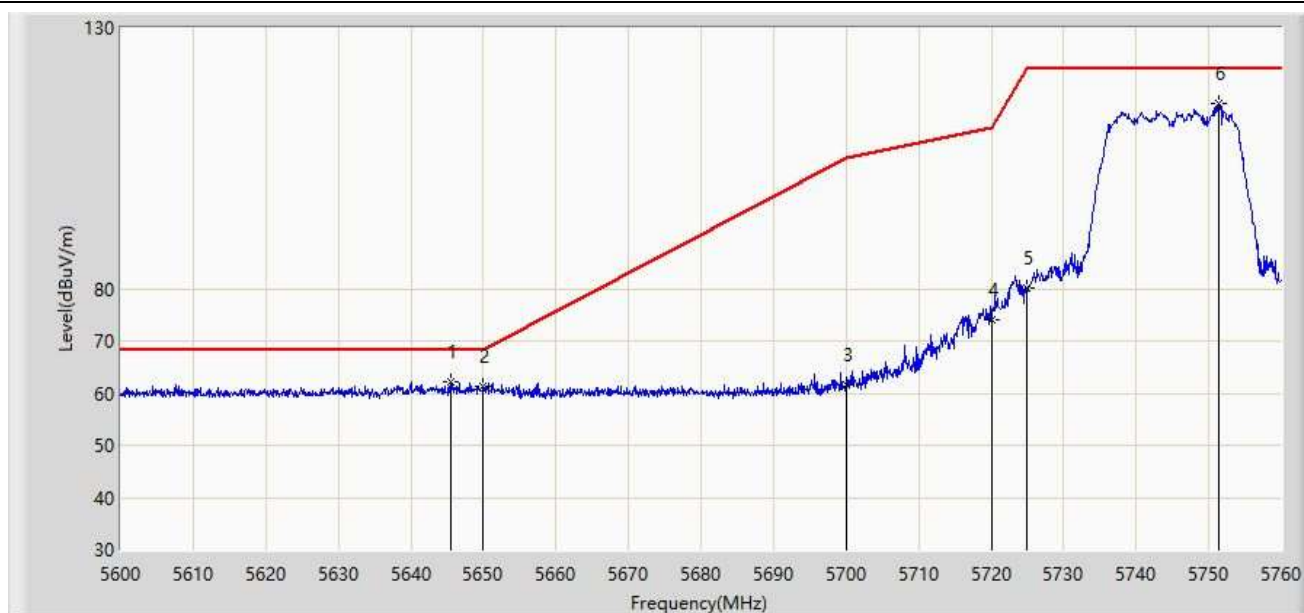


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5645.600	62.067	57.338	-6.133	68.200	4.730	PK
2			5650.000	61.259	56.513	-6.941	68.200	4.746	PK
3			5700.000	61.702	56.764	-43.498	105.200	4.938	PK
4			5720.000	74.072	69.057	-36.728	110.800	5.015	PK
5			5725.000	80.039	75.005	-42.161	122.200	5.034	PK
6			5751.360	115.414	110.279	N/A	N/A	5.135	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2019/07/14 - 13:36
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D	Polarity: Horizontal
EUT: Aruba 500 接入點	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at channel 5745MHz Ant 0 + 1	

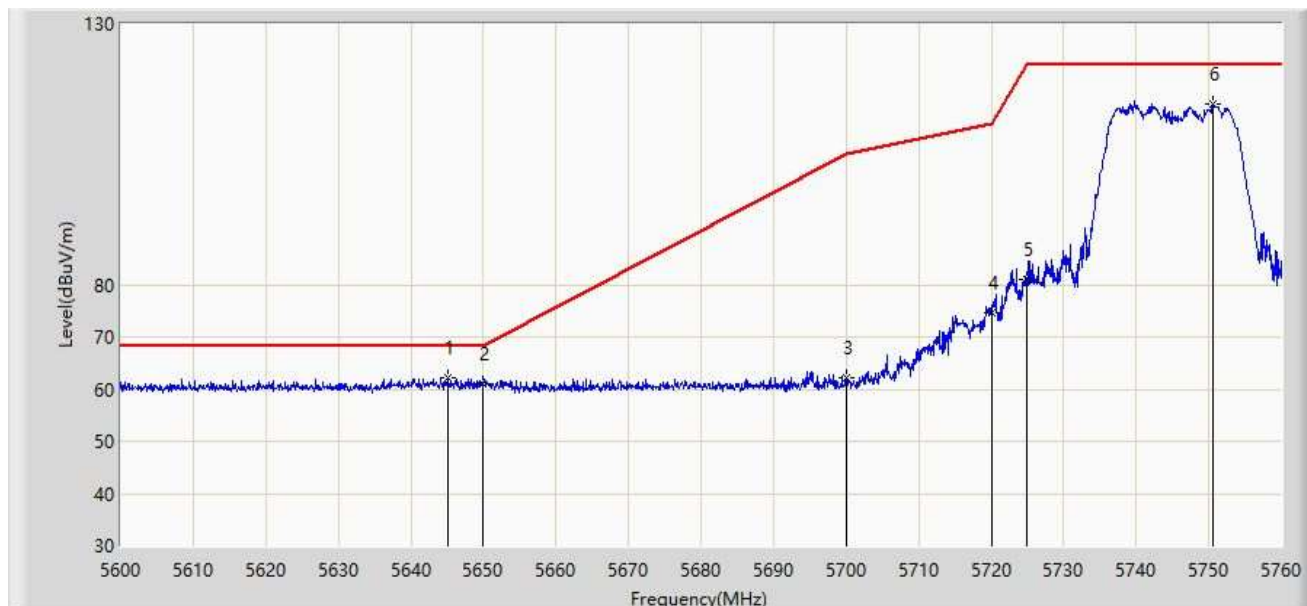


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5645.040	62.314	57.587	-5.886	68.200	4.727	PK
2			5650.000	60.941	56.195	-7.259	68.200	4.746	PK
3			5700.000	62.155	57.217	-43.045	105.200	4.938	PK
4			5720.000	74.600	69.585	-36.200	110.800	5.015	PK
5			5725.000	81.009	75.975	-41.191	122.200	5.034	PK
6			5750.560	114.727	109.595	N/A	N/A	5.132	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2019/06/27 - 00:07
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D	Polarity: Horizontal
EUT: Aruba 500 接入點	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at channel 5825MHz Ant 0 + 1	

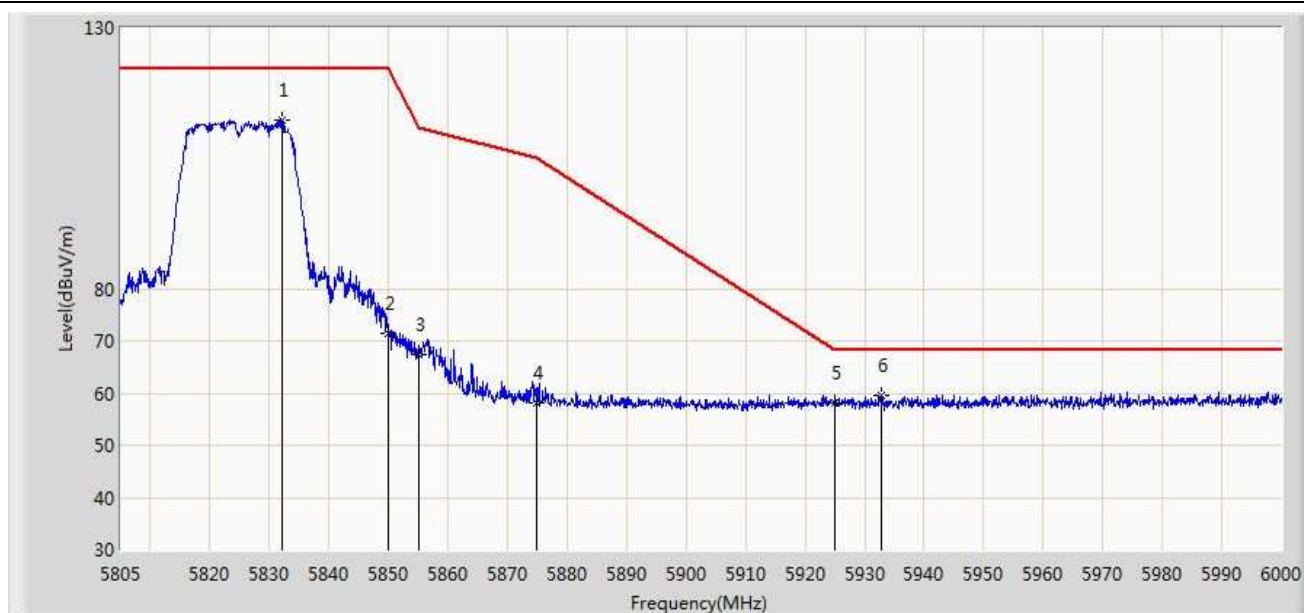


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5832.105	112.201	106.756	N/A	N/A	5.445	PK
2			5850.000	71.542	66.028	-50.658	122.200	5.514	PK
3			5855.000	67.392	61.859	-43.408	110.800	5.533	PK
4			5875.000	58.158	52.548	-47.042	105.200	5.610	PK
5			5925.000	58.168	52.366	-10.032	68.200	5.802	PK
6		*	5932.725	59.510	53.678	-8.690	68.200	5.832	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2019/06/27 - 00:06
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D	Polarity: Vertical
EUT: Aruba 500 接入點	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at channel 5825MHz Ant 0 + 1	

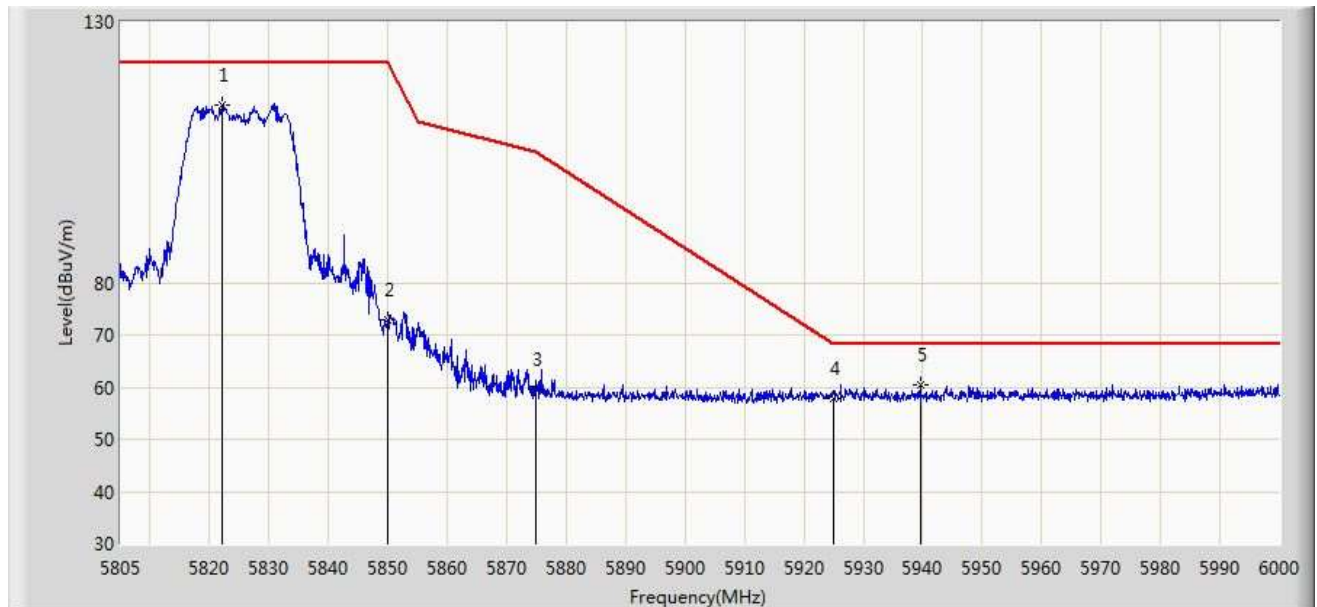


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5822.160	114.112	108.705	N/A	N/A	5.408	PK
2			5850.000	72.771	67.257	-49.429	122.200	5.514	PK
3			5875.000	59.448	53.838	-45.752	105.200	5.610	PK
4			5925.000	57.723	51.921	-10.477	68.200	5.802	PK
5		*	5939.647	60.539	54.680	-7.661	68.200	5.859	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2019/06/27 - 00:14
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D	Polarity: Horizontal
EUT: Aruba 500 接入點	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at channel 5190MHz Ant 0 + 1	

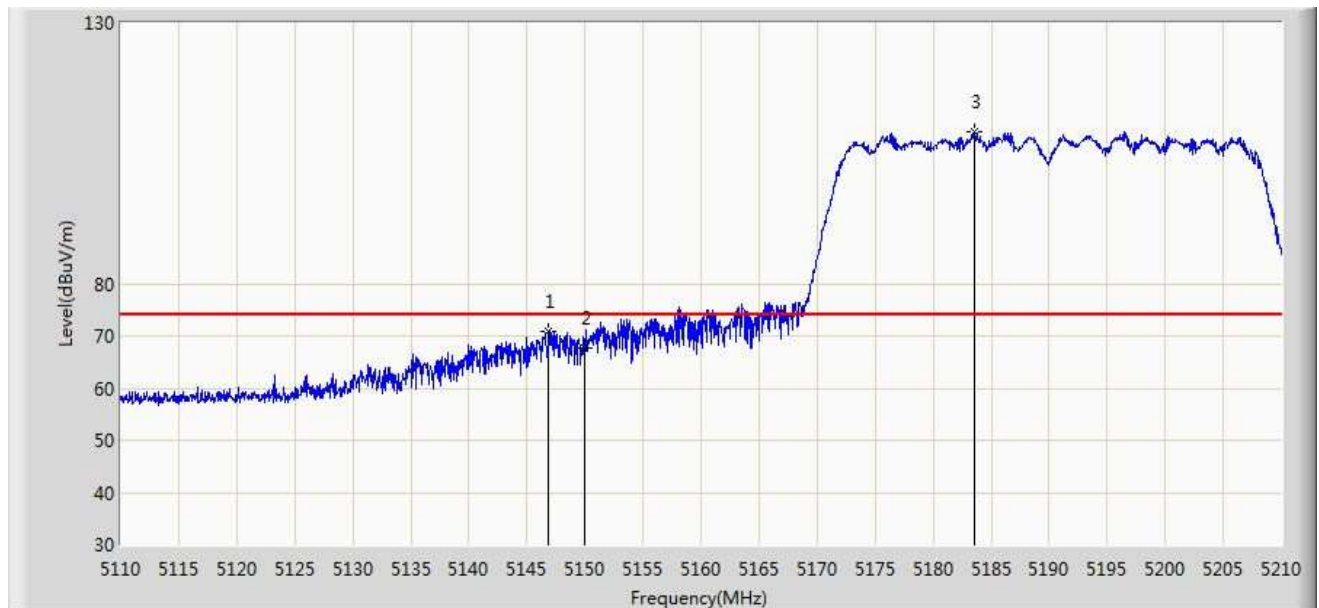


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5146.850	70.995	67.122	-3.005	74.000	3.873	PK
2			5150.000	67.721	63.845	-6.279	74.000	3.876	PK
3		*	5183.600	109.166	105.261	N/A	N/A	3.905	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2019/06/27 - 00:15
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D	Polarity: Horizontal
EUT: Aruba 500 接入點	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at channel 5190MHz Ant 0 + 1	

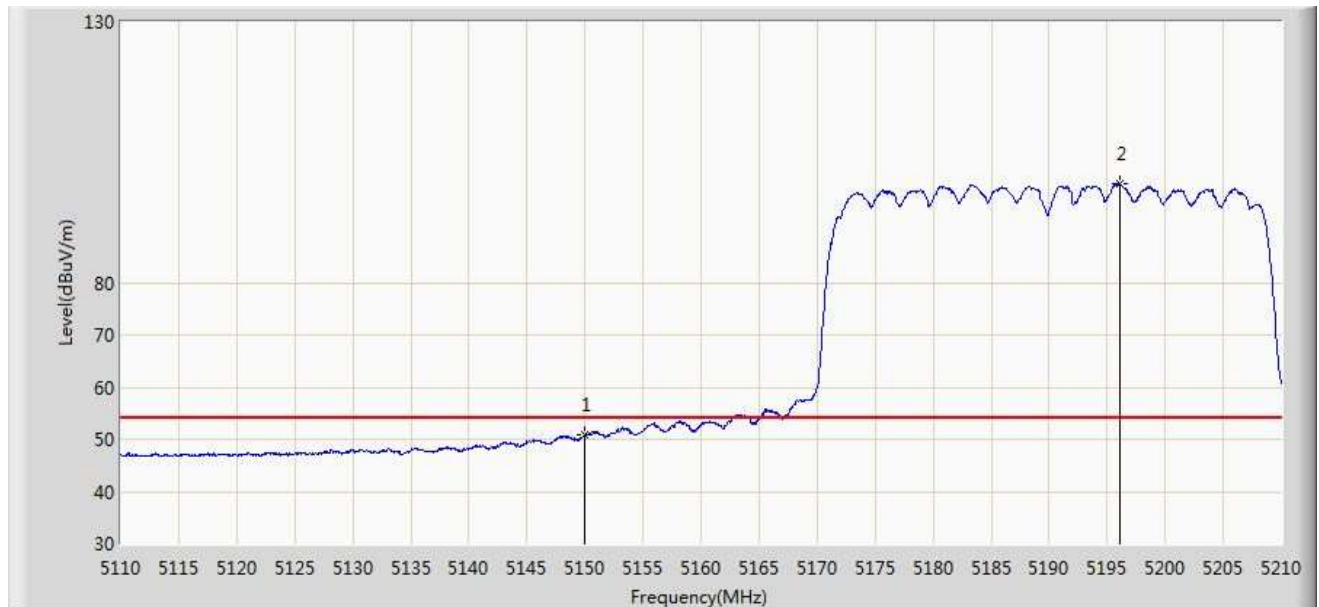


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	50.771	46.895	-3.229	54.000	3.876	AV
2		*	5196.100	98.998	95.083	N/A	N/A	3.915	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2019/06/27 - 00:12
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D	Polarity: Vertical
EUT: Aruba 500 接入點	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at channel 5190MHz Ant 0 + 1	

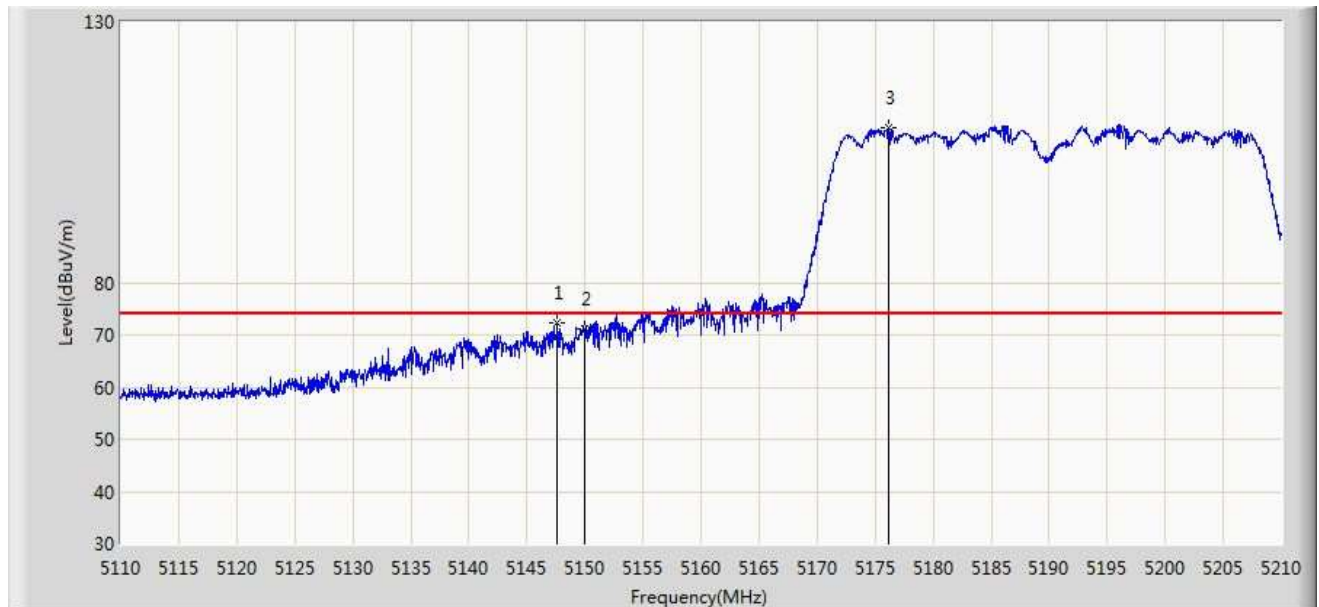


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5147.650	72.214	68.340	-1.786	74.000	3.874	PK
2			5150.000	71.179	67.303	-2.821	74.000	3.876	PK
3		*	5176.150	109.772	105.874	N/A	N/A	3.898	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2019/06/27 - 00:14
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D	Polarity: Vertical
EUT: Aruba 500 接入點	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at channel 5190MHz Ant 0 + 1	

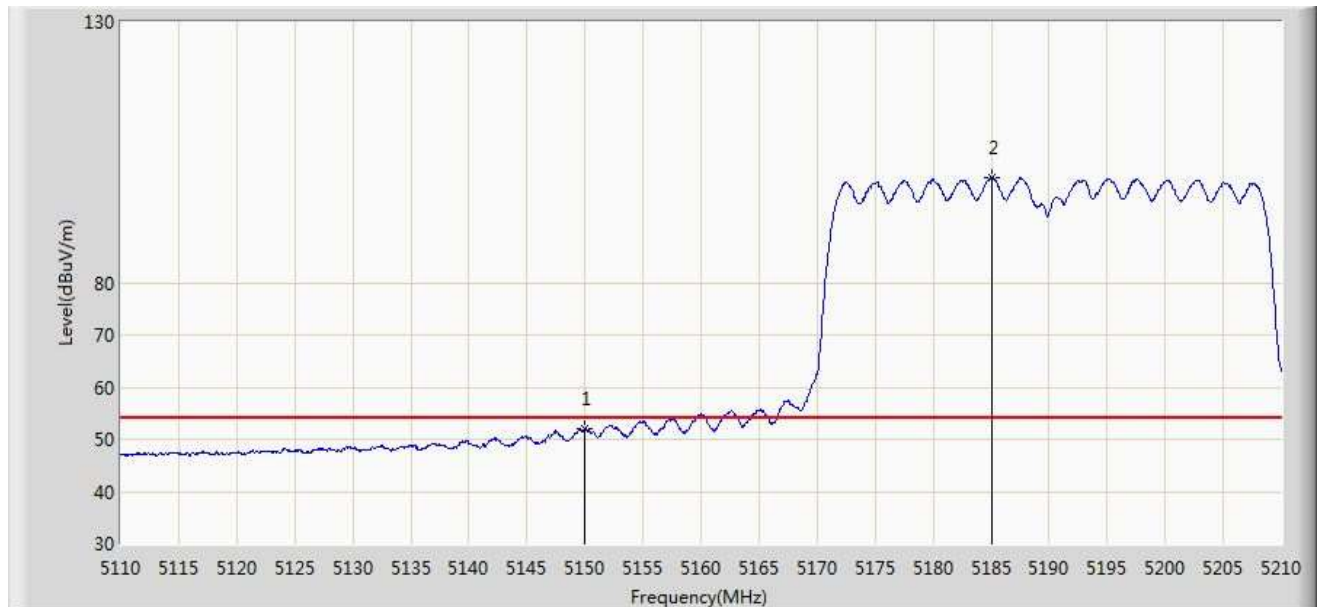


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	51.927	48.051	-2.073	54.000	3.876	AV
2		*	5185.100	100.120	96.214	N/A	N/A	3.906	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2019/07/02 - 06:47
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D	Polarity: Horizontal
EUT: Aruba 500 接入點	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at channel 5310MHz Ant 0 + 1	

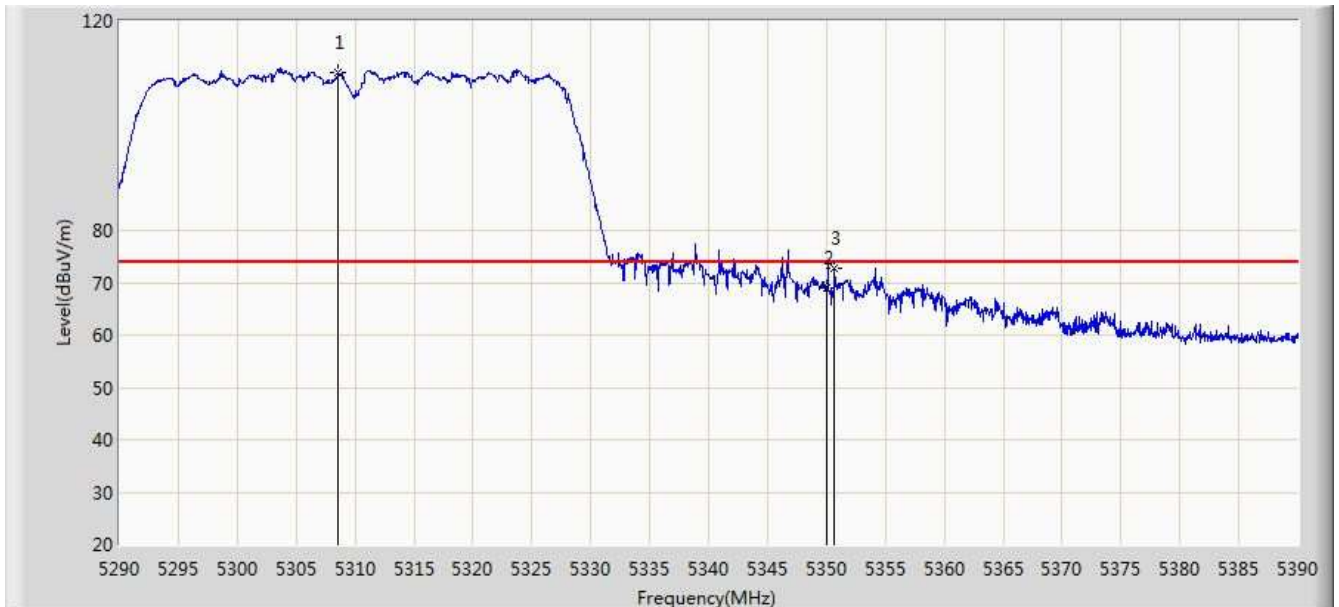


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5308.600	110.270	106.261	N/A	N/A	4.009	PK
2			5350.000	68.872	64.828	-5.128	74.000	4.044	PK
3			5350.700	72.873	68.828	-1.127	74.000	4.045	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2019/07/02 - 06:49
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D	Polarity: Horizontal
EUT: Aruba 500 接入點	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at channel 5310MHz Ant 0 + 1	

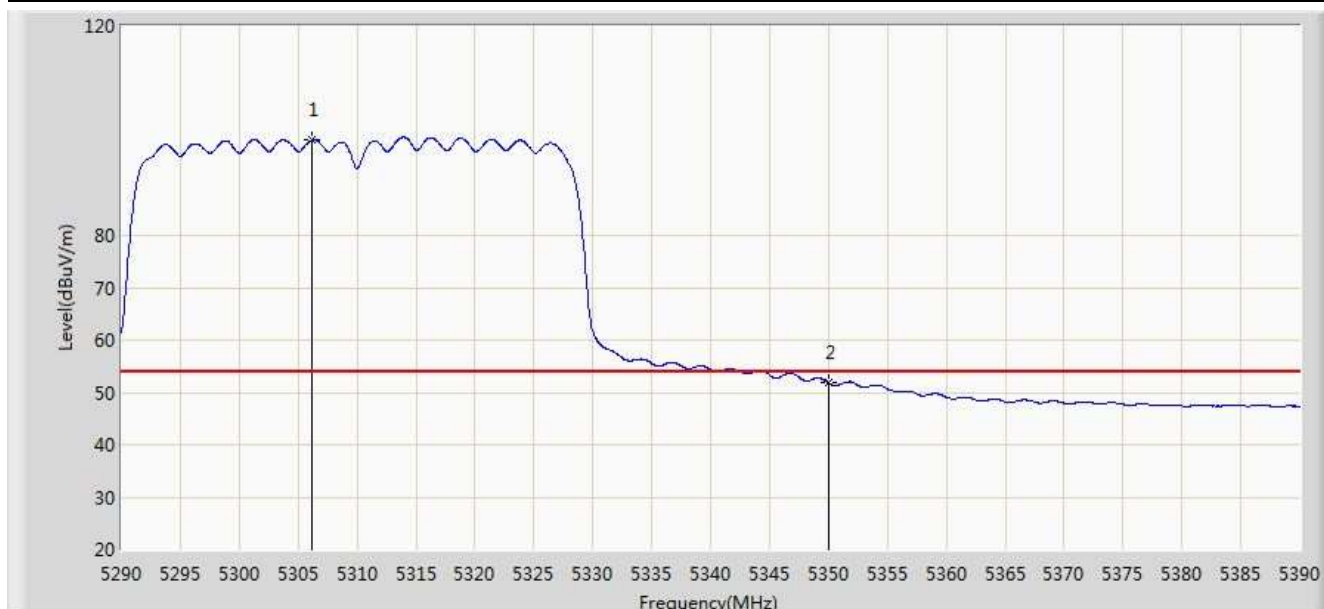


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5306.200	98.137	94.130	N/A	N/A	4.007	AV
2			5350.000	51.870	47.826	-2.130	54.000	4.044	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2019/07/02 - 06:49
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D	Polarity: Vertical
EUT: Aruba 500 接入點	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at channel 5310MHz Ant 0 + 1	

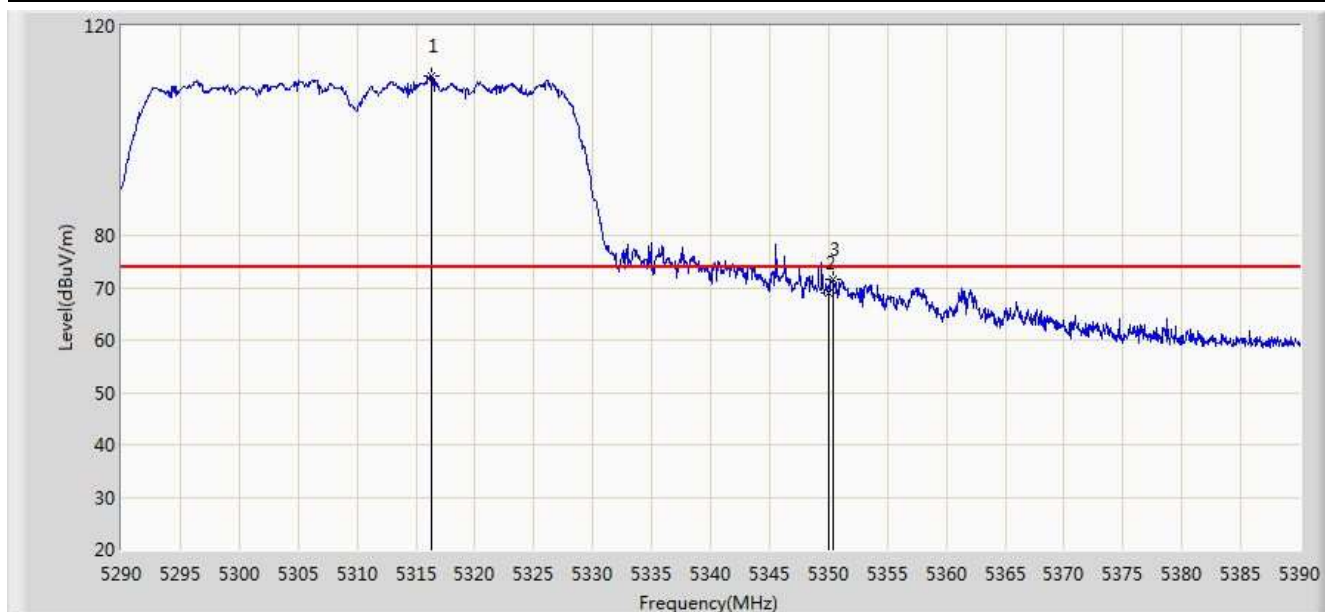


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5316.300	110.308	106.292	N/A	N/A	4.016	PK
2			5350.000	69.041	64.997	-4.959	74.000	4.044	PK
3			5350.400	71.724	67.679	-2.276	74.000	4.045	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2019/07/02 - 06:53
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D	Polarity: Vertical
EUT: Aruba 500 接入點	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at channel 5310MHz Ant 0 + 1	

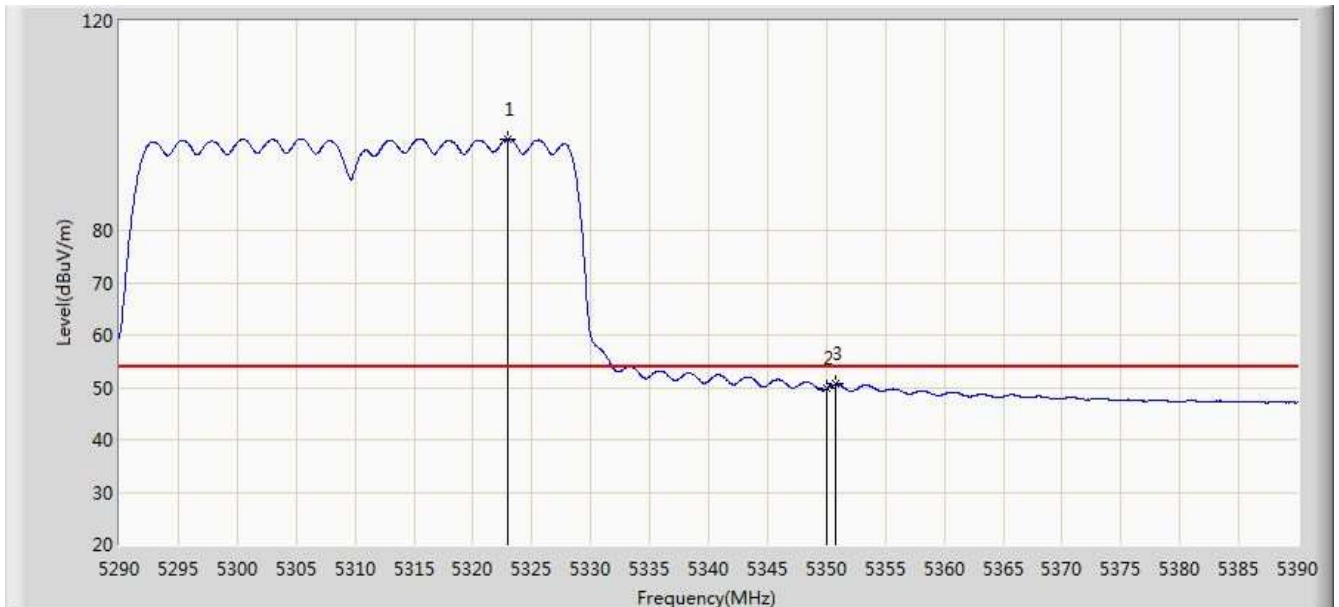


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5322.900	97.434	93.413	N/A	N/A	4.021	AV
2			5350.000	49.726	45.682	-4.274	54.000	4.044	AV
3			5350.800	50.595	46.550	-3.405	54.000	4.045	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2019/06/27 - 00:27
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D	Polarity: Horizontal
EUT: Aruba 500 接入點	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at channel 5510MHz Ant 0 + 1	

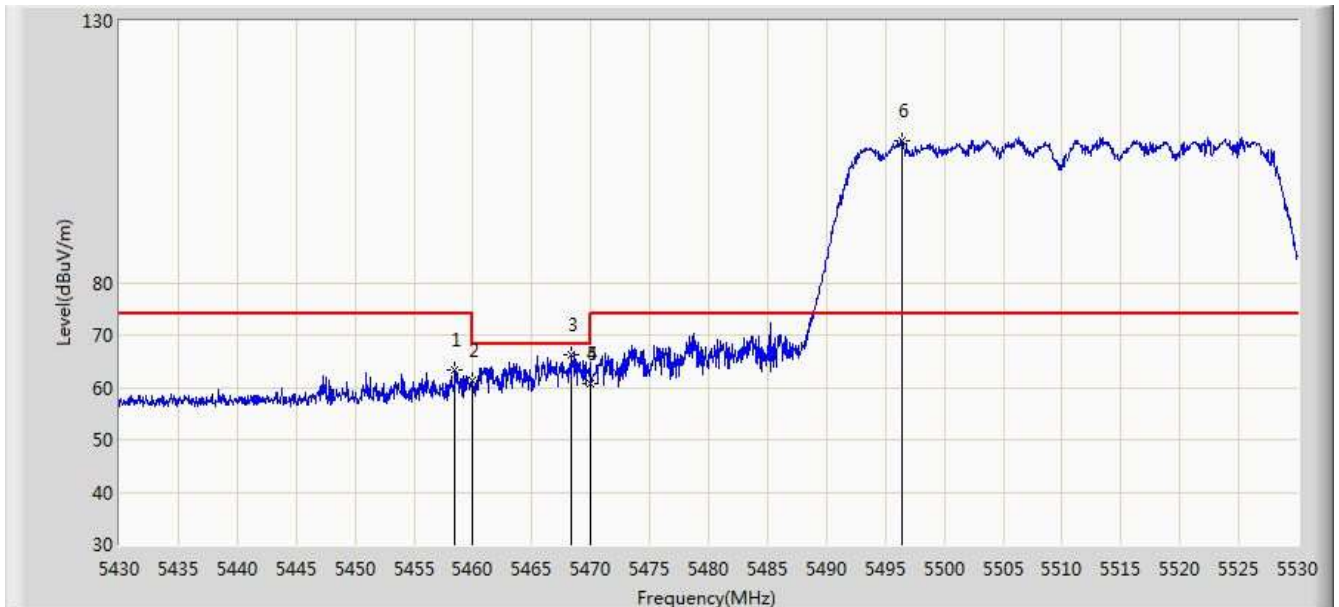


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5458.500	63.443	59.226	-10.557	74.000	4.217	PK
2			5460.000	61.184	56.952	-12.816	74.000	4.232	PK
3			5468.300	66.282	61.969	-1.918	68.200	4.313	PK
4			5470.000	60.779	56.450	-7.421	68.200	4.329	PK
5			5470.000	60.779	54.212	-7.421	68.200	6.567	PK
6		*	5496.450	107.200	102.803	N/A	N/A	4.397	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2019/06/27 - 00:28
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D	Polarity: Horizontal
EUT: Aruba 500 接入點	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at channel 5510MHz Ant 0 + 1	

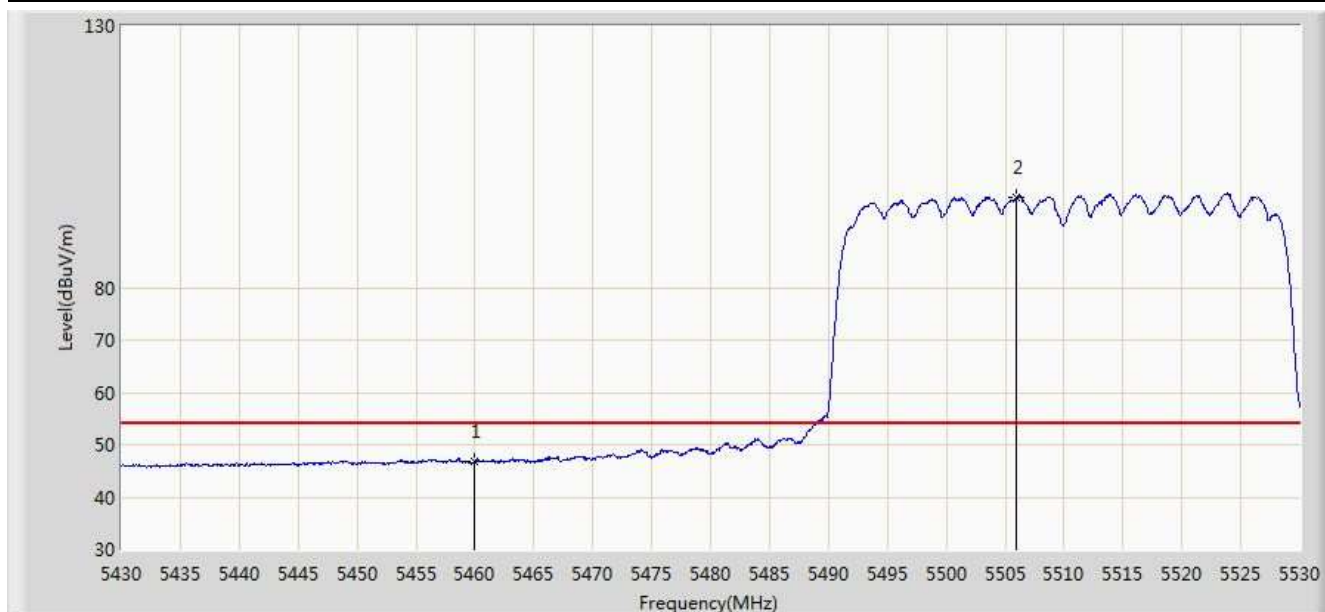


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	46.745	42.609	-7.255	54.000	4.136	AV
2		*	5506.000	97.118	92.925	N/A	N/A	4.193	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2019/06/27 - 00:26
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D	Polarity: Vertical
EUT: Aruba 500 接入點	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at channel 5510MHz Ant 0 + 1	

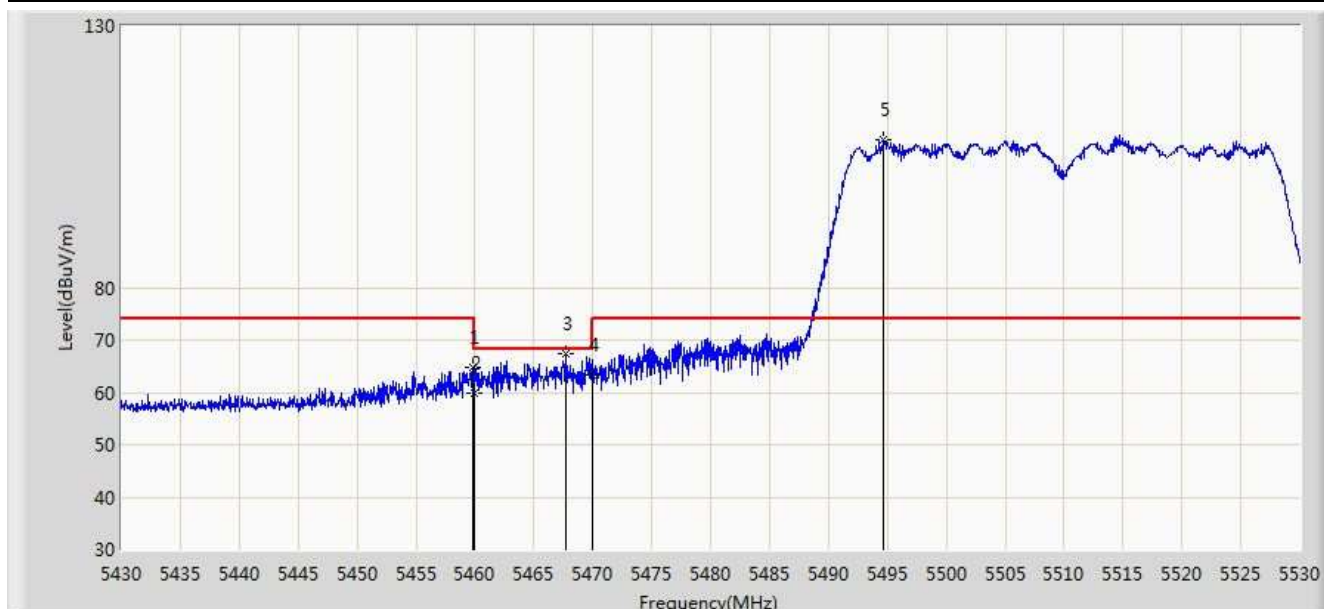


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5459.850	64.650	60.514	-9.350	74.000	4.136	PK
2			5460.000	59.828	55.692	-14.172	74.000	4.136	PK
3			5467.700	67.325	60.748	-0.875	68.200	6.577	PK
4			5470.000	63.460	59.316	-4.740	68.200	4.144	PK
5		*	5494.600	108.338	104.166	N/A	N/A	4.171	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2019/06/27 - 00:27
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D	Polarity: Vertical
EUT: Aruba 500 接入點	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at channel 5510MHz Ant 0 + 1	

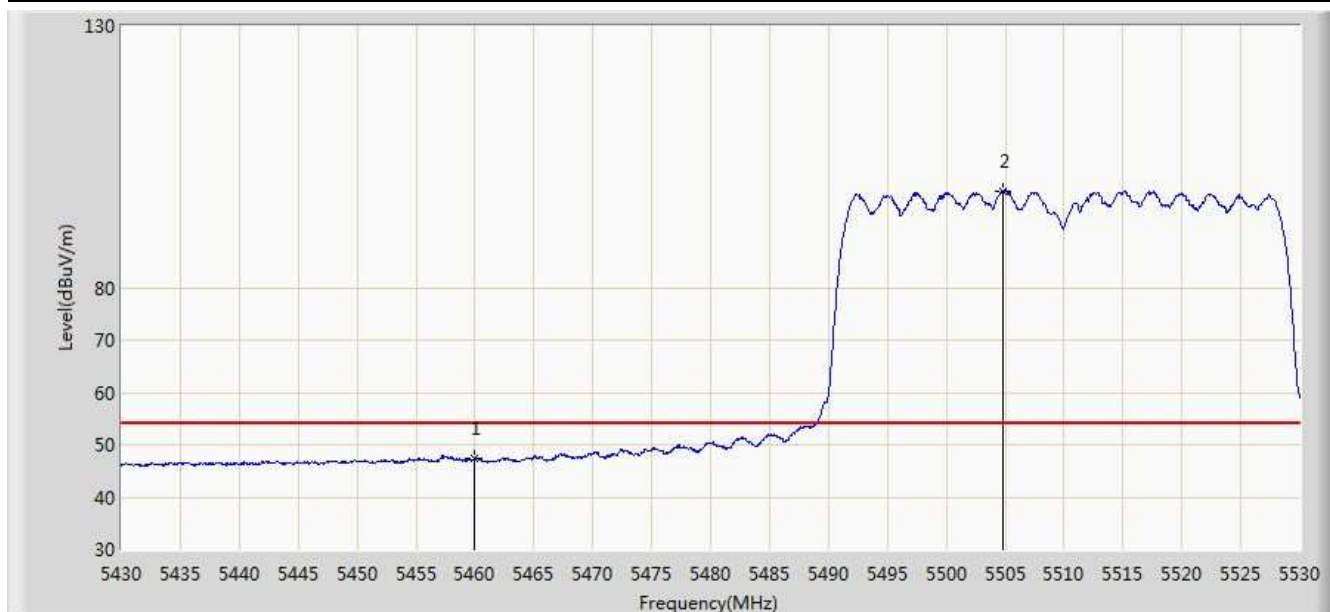


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	47.339	43.203	-6.661	54.000	4.136	AV
2		*	5504.800	98.543	94.354	N/A	N/A	4.189	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2019/07/02 - 06:55
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D	Polarity: Horizontal
EUT: Aruba 500 接入點	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at channel 5670MHz Ant 0 + 1	

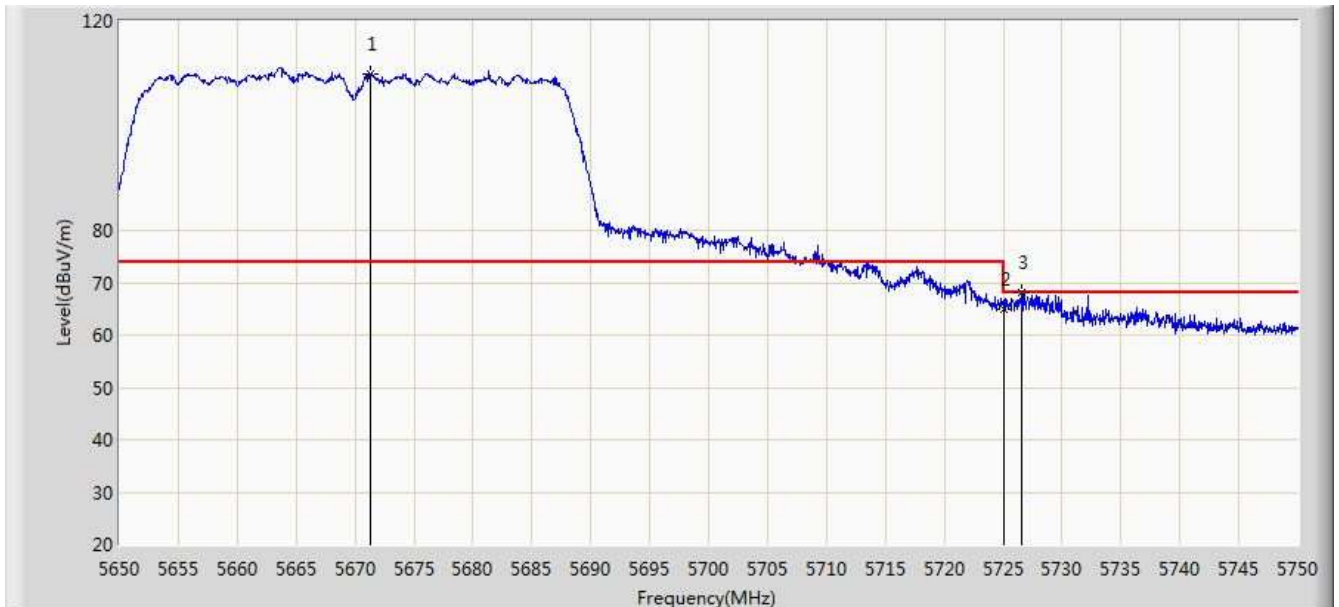


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5671.250	109.988	105.160	N/A	N/A	4.828	PK
2			5725.000	65.030	59.996	-3.170	68.200	5.034	PK
3			5726.600	68.004	62.964	-0.196	68.200	5.040	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2019/07/02 - 06:58
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D	Polarity: Vertical
EUT: Aruba 500 接入點	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at channel 5670MHz Ant 0 + 1	

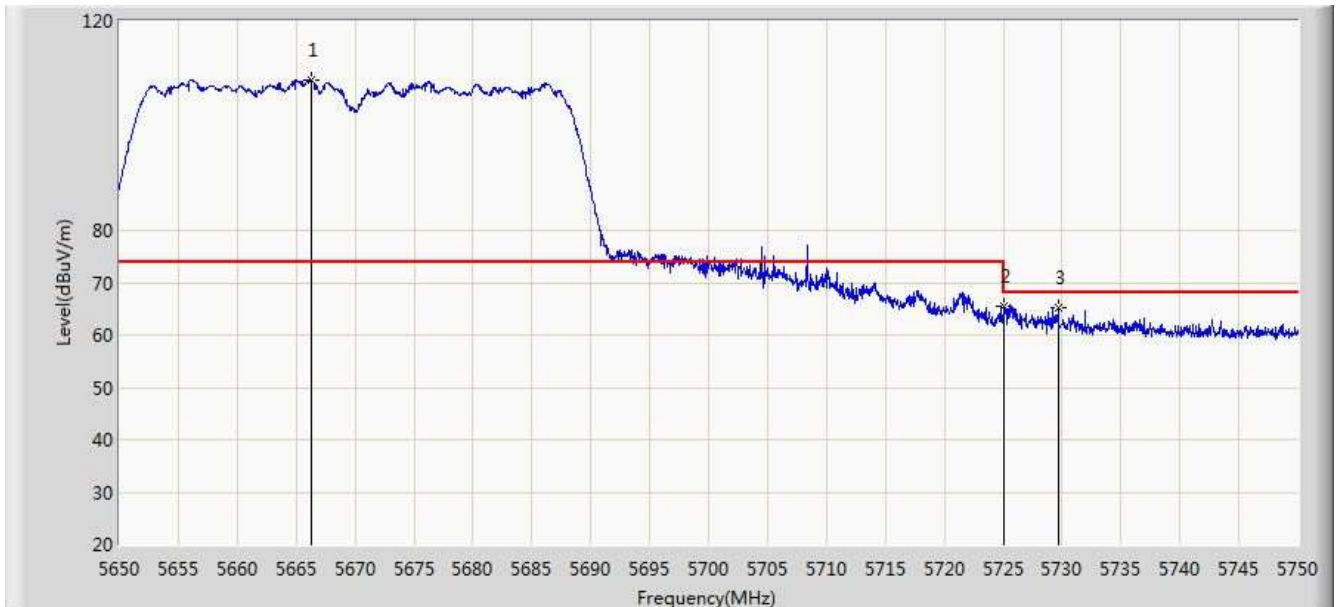


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5666.250	108.680	103.871	N/A	N/A	4.809	PK
2			5725.000	65.517	60.483	-2.683	68.200	5.034	PK
3			5729.700	65.234	60.182	-2.966	68.200	5.053	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2019/06/27 - 00:40
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D	Polarity: Horizontal
EUT: Aruba 500 接入點	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at channel 5755MHz Ant 0 + 1	

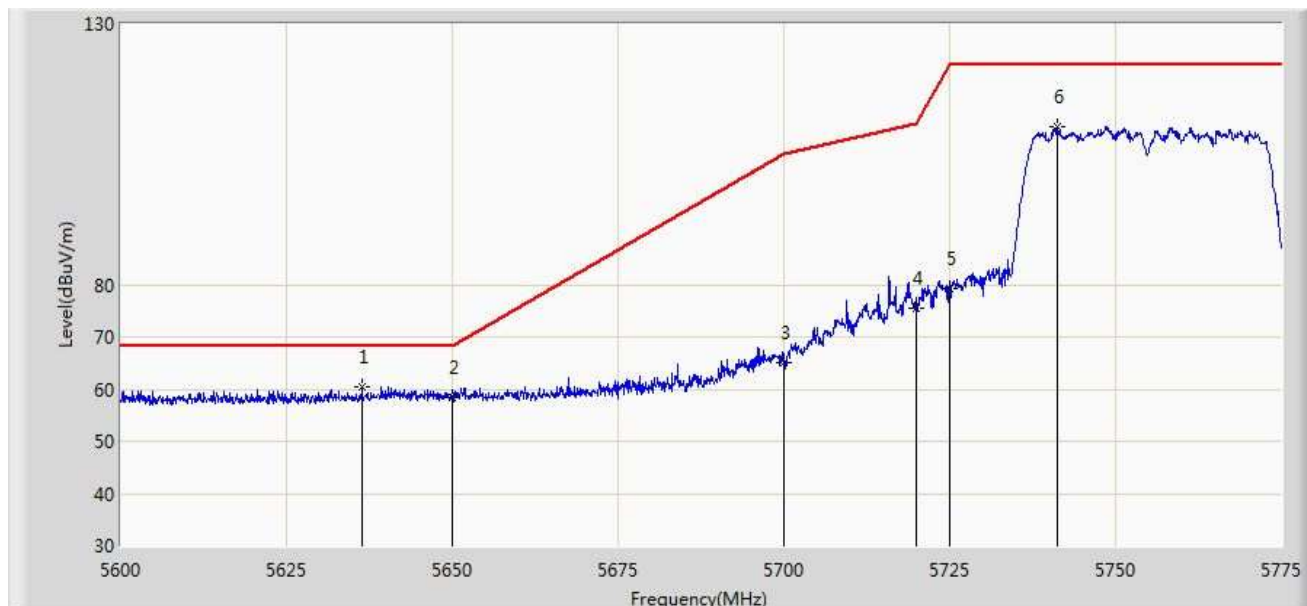


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5636.400	60.416	55.722	-7.784	68.200	4.695	PK
2			5650.000	58.449	53.703	-9.751	68.200	4.746	PK
3			5700.000	65.091	60.153	-40.109	105.200	4.938	PK
4			5720.000	75.559	70.544	-35.241	110.800	5.015	PK
5			5725.000	79.181	74.147	-43.019	122.200	5.034	PK
6			5741.225	110.198	105.102	N/A	N/A	5.096	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2019/06/27 - 00:37
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D	Polarity: Vertical
EUT: Aruba 500 接入點	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at channel 5755MHz Ant 0 + 1	

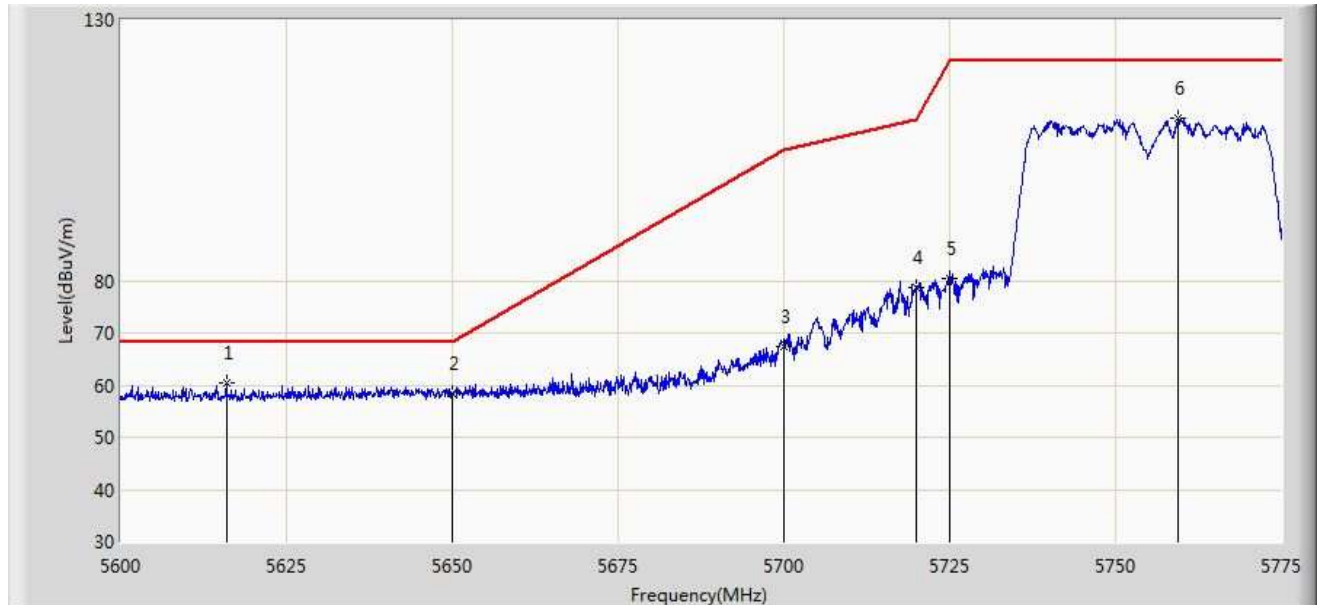


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5615.925	60.325	55.710	-7.875	68.200	4.615	PK
2			5650.000	58.270	53.524	-9.930	68.200	4.746	PK
3			5700.000	67.389	62.451	-37.811	105.200	4.938	PK
4			5720.000	78.729	73.714	-32.071	110.800	5.015	PK
5			5725.000	80.338	75.304	-41.862	122.200	5.034	PK
6			5759.513	111.212	106.046	N/A	N/A	5.166	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2019/06/27 - 00:43
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D	Polarity: Horizontal
EUT: Aruba 500 接入點	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at channel 5795MHz Ant 0 + 1	

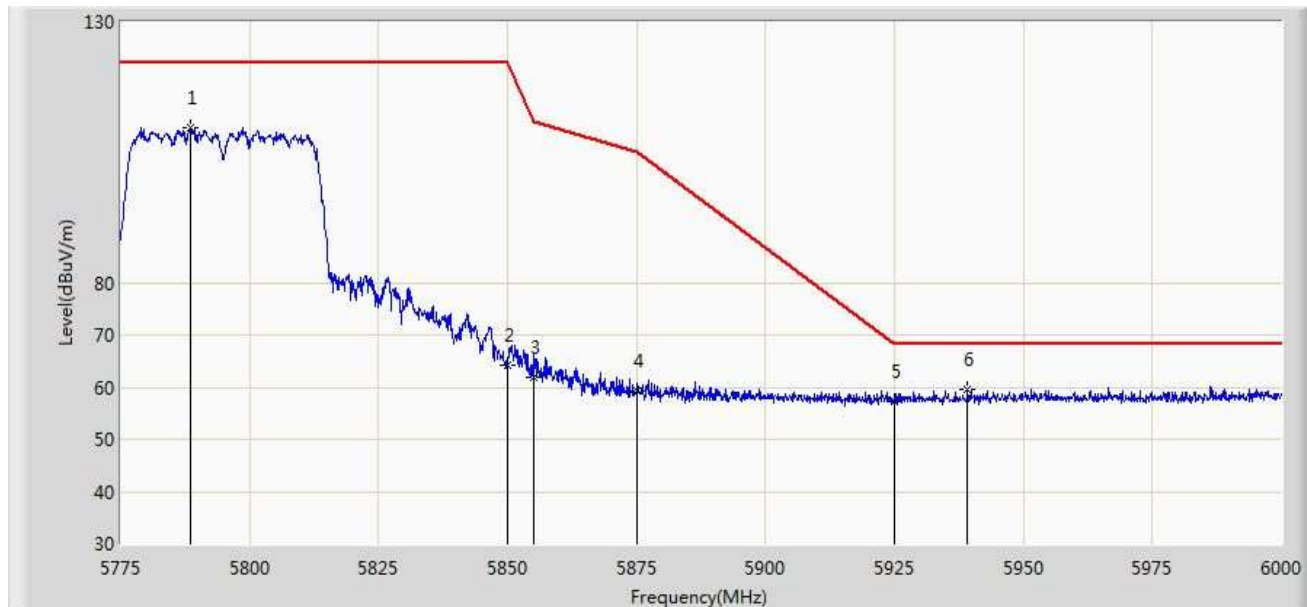


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5788.500	109.769	104.491	N/A	N/A	5.278	PK
2			5850.000	64.098	58.584	-58.102	122.200	5.514	PK
3			5855.000	61.980	56.447	-48.820	110.800	5.533	PK
4			5875.000	59.235	53.625	-45.965	105.200	5.610	PK
5			5925.000	57.295	51.493	-10.905	68.200	5.802	PK
6		*	5939.138	59.486	53.629	-8.714	68.200	5.857	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2019/06/27 - 00:42
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D	Polarity: Vertical
EUT: Aruba 500 接入點	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at channel 5795MHz Ant 0 + 1	

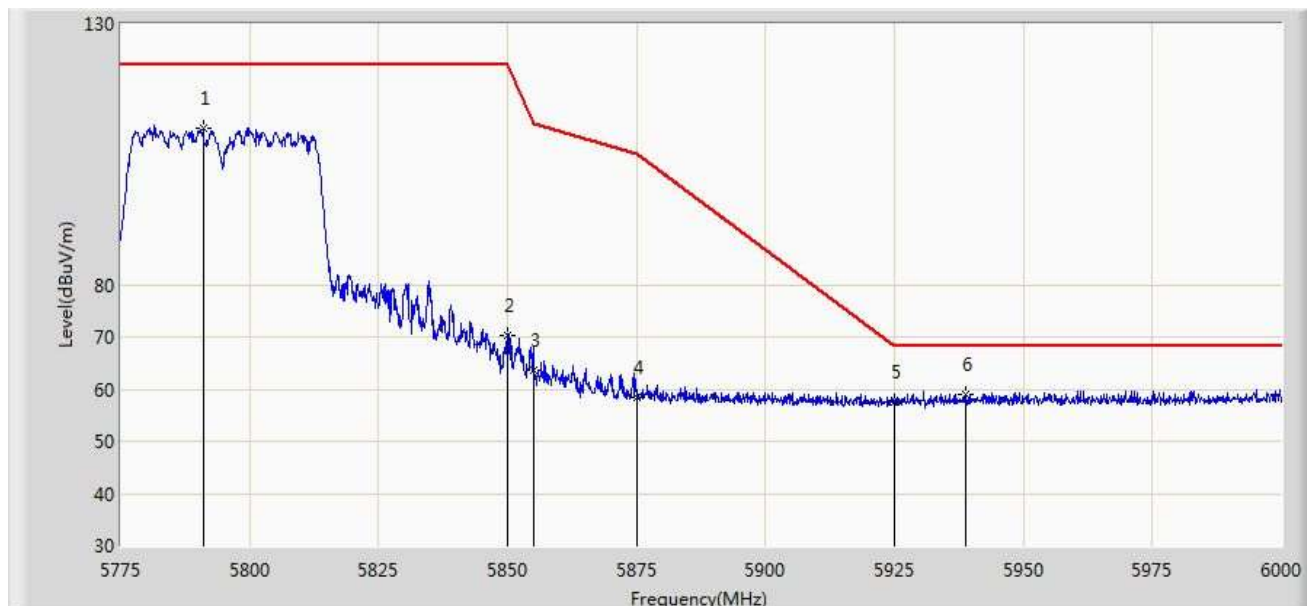


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5790.975	110.118	104.830	N/A	N/A	5.288	PK
2			5850.000	70.181	64.667	-52.019	122.200	5.514	PK
3			5855.000	63.664	58.131	-47.136	110.800	5.533	PK
4			5875.000	58.547	52.937	-46.653	105.200	5.610	PK
5			5925.000	57.527	51.725	-10.673	68.200	5.802	PK
6		*	5938.687	59.076	53.221	-9.124	68.200	5.855	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2019/06/27 - 02:33
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D	Polarity: Horizontal
EUT: Aruba 500 接入點	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at channel 5210MHz Ant 0 + 1	

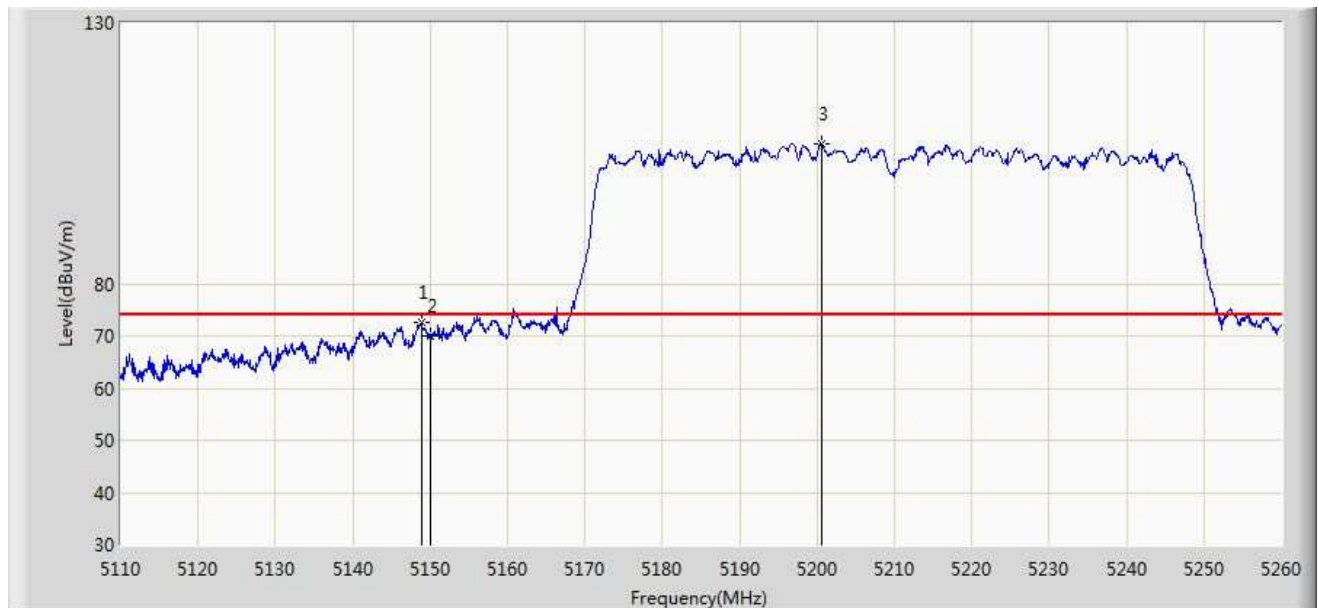


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5148.850	72.475	68.600	-1.525	74.000	3.875	PK
2			5150.000	69.908	66.032	-4.092	74.000	3.876	PK
3		*	5200.600	106.875	102.956	N/A	N/A	3.919	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2019/06/27 - 02:35
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D	Polarity: Horizontal
EUT: Aruba 500 接入點	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at channel 5210MHz Ant 0 + 1	

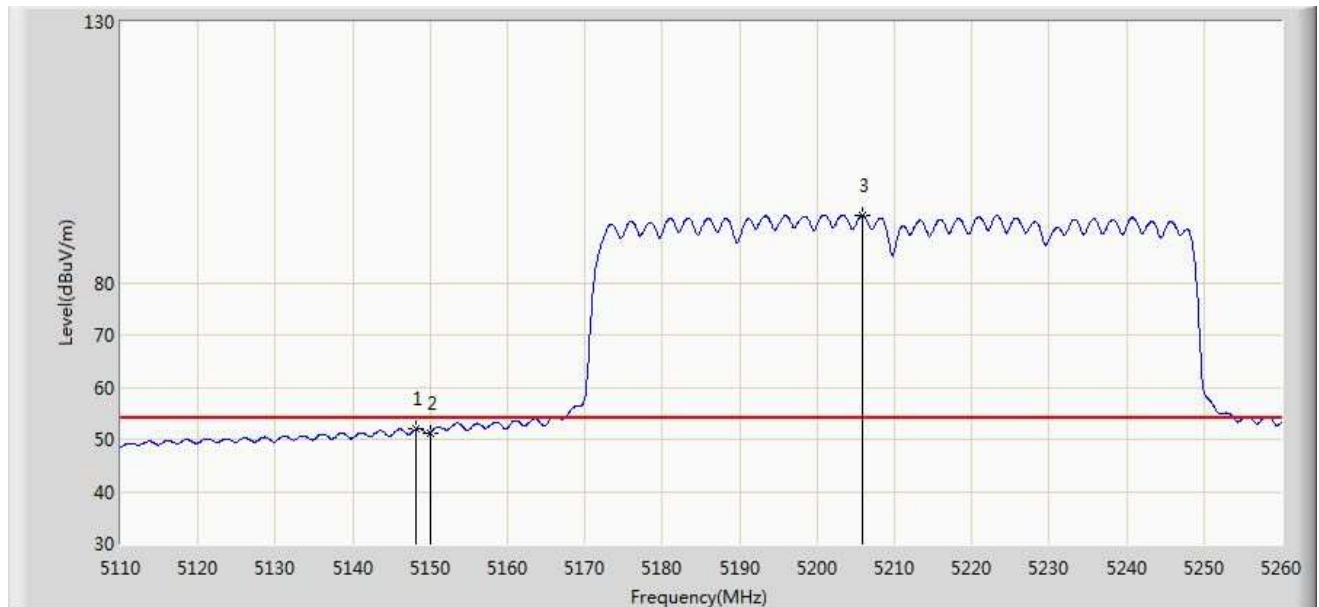


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5148.100	51.919	48.045	-2.081	54.000	3.874	AV
2			5150.000	51.265	47.389	-2.735	54.000	3.876	AV
3		*	5205.775	92.989	89.066	N/A	N/A	3.923	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2019/06/27 - 02:27
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D	Polarity: Vertical
EUT: Aruba 500 接入點	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at channel 5210MHz Ant 0 + 1	

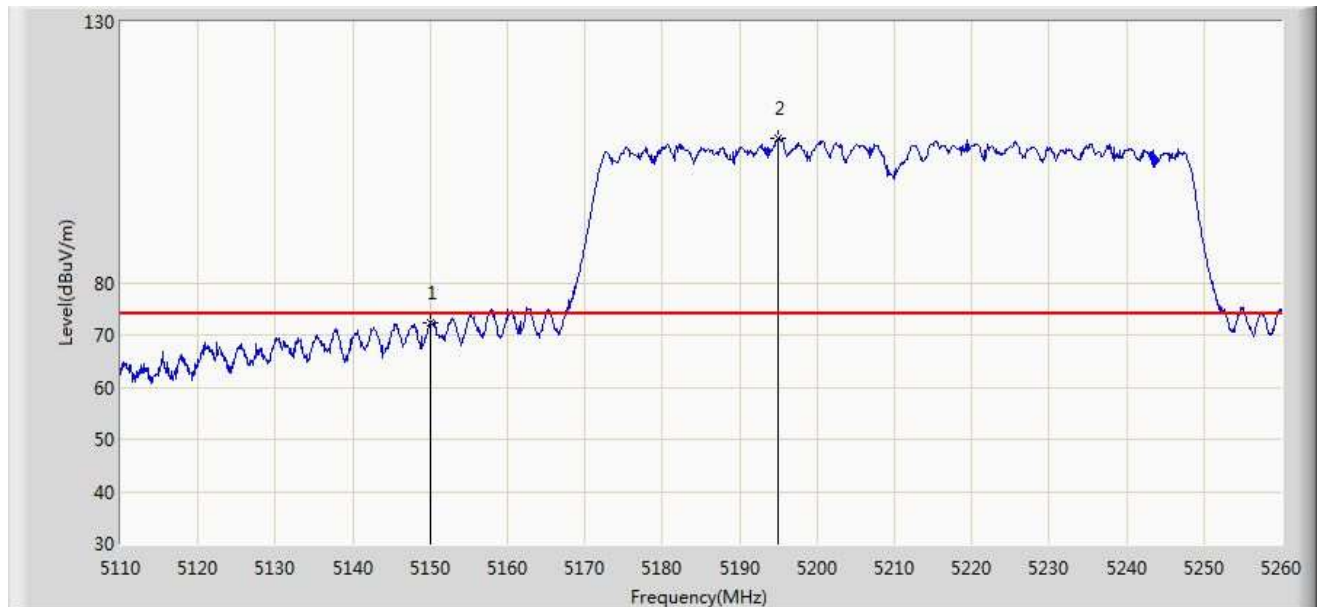


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	72.328	68.452	-1.672	74.000	3.876	PK
2		*	5195.050	107.603	103.689	N/A	N/A	3.914	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2019/06/27 - 02:30
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D	Polarity: Vertical
EUT: Aruba 500 接入點	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at channel 5210MHz Ant 0 + 1	

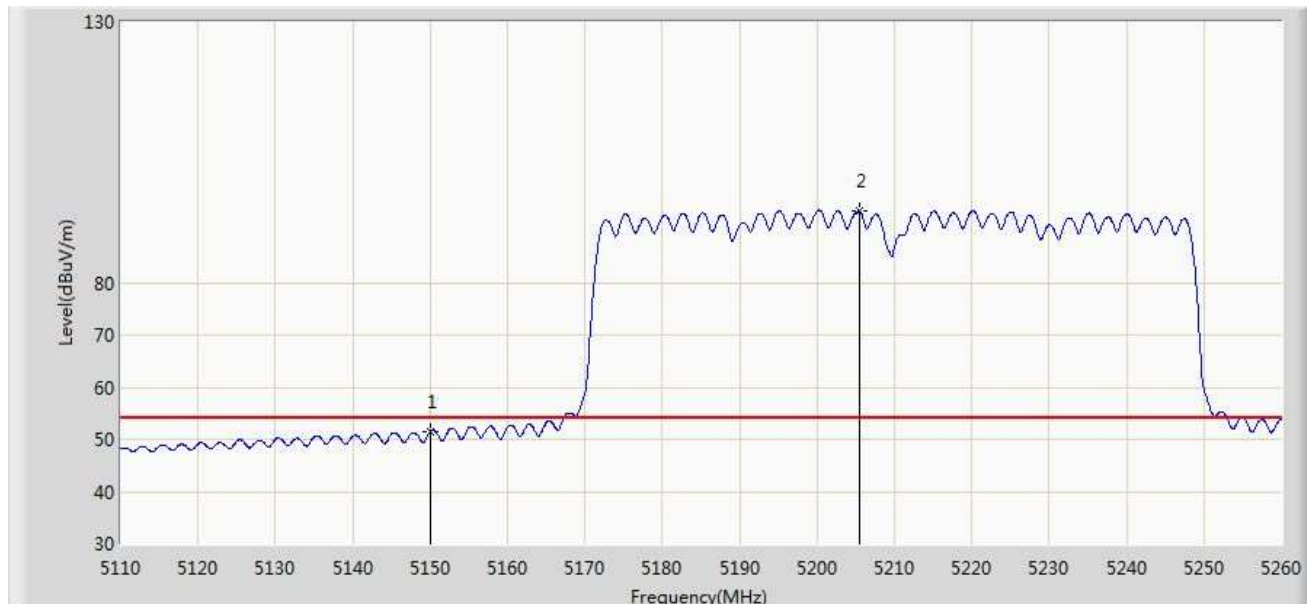


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	51.436	47.560	-2.564	54.000	3.876	AV
2		*	5205.400	93.624	89.701	N/A	N/A	3.923	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2019/06/27 - 02:53
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D	Polarity: Horizontal
EUT: Aruba 500 接入點	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at channel 5290MHz Ant 0 + 1	

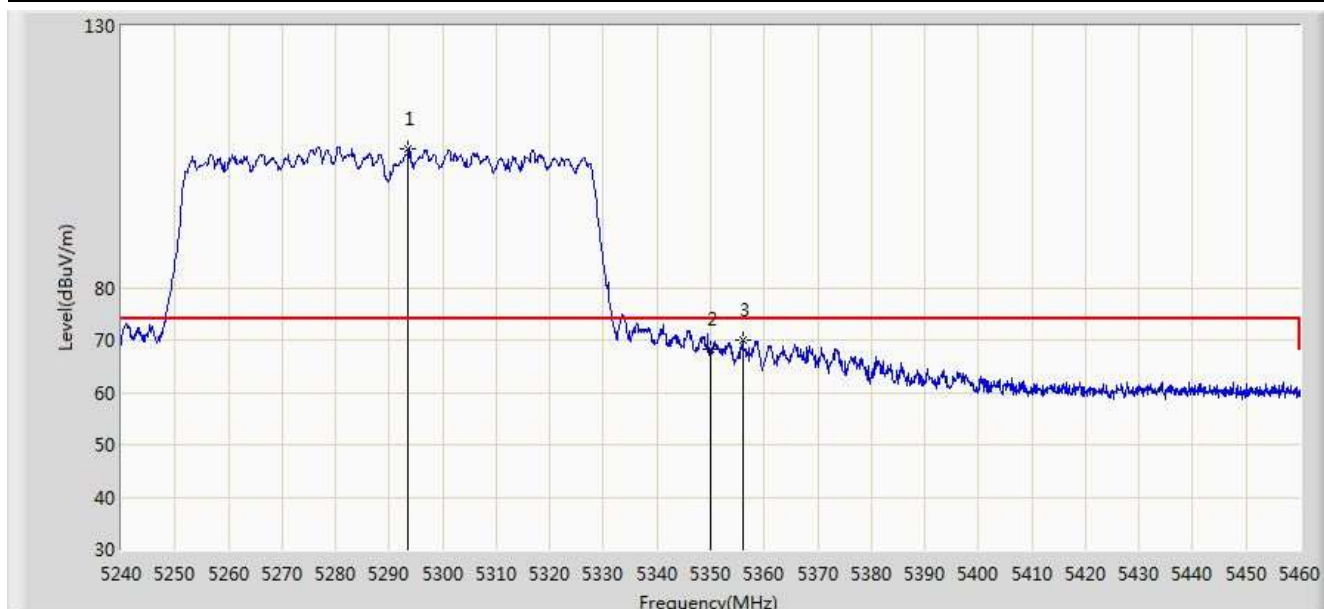


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5293.460	106.553	102.557	N/A	N/A	3.996	PK
2			5350.000	68.245	64.201	-5.755	74.000	4.044	PK
3			5356.050	69.986	65.937	-4.014	74.000	4.049	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)


Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2019/06/27 - 02:54
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D	Polarity: Horizontal
EUT: Aruba 500 接入點	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at channel 5290MHz Ant 0 + 1	

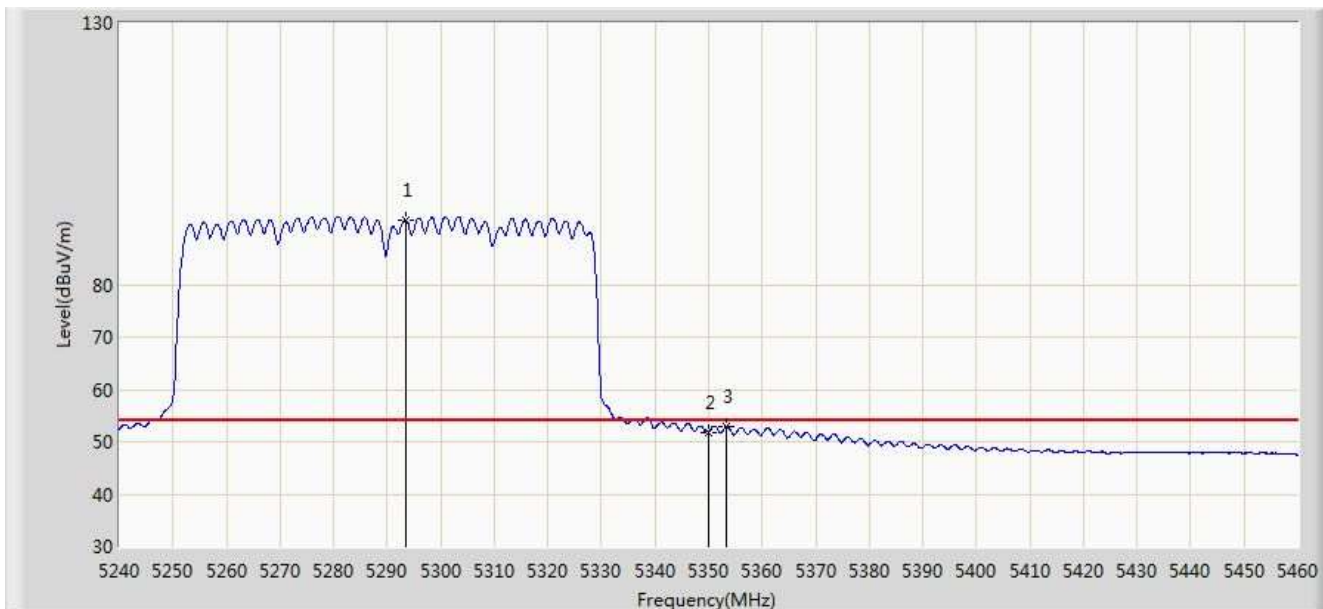

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5293.460	92.349	88.353	N/A	N/A	3.996	AV
2			5350.000	51.752	47.708	-2.248	54.000	4.044	AV
3			5353.190	52.895	48.848	-1.105	54.000	4.047	AV

Site: AC1	Time: 2019/06/27 - 02:50
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D	Polarity: Vertical
EUT: Aruba 500 接入點	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at channel 5290MHz Ant 0 + 1	

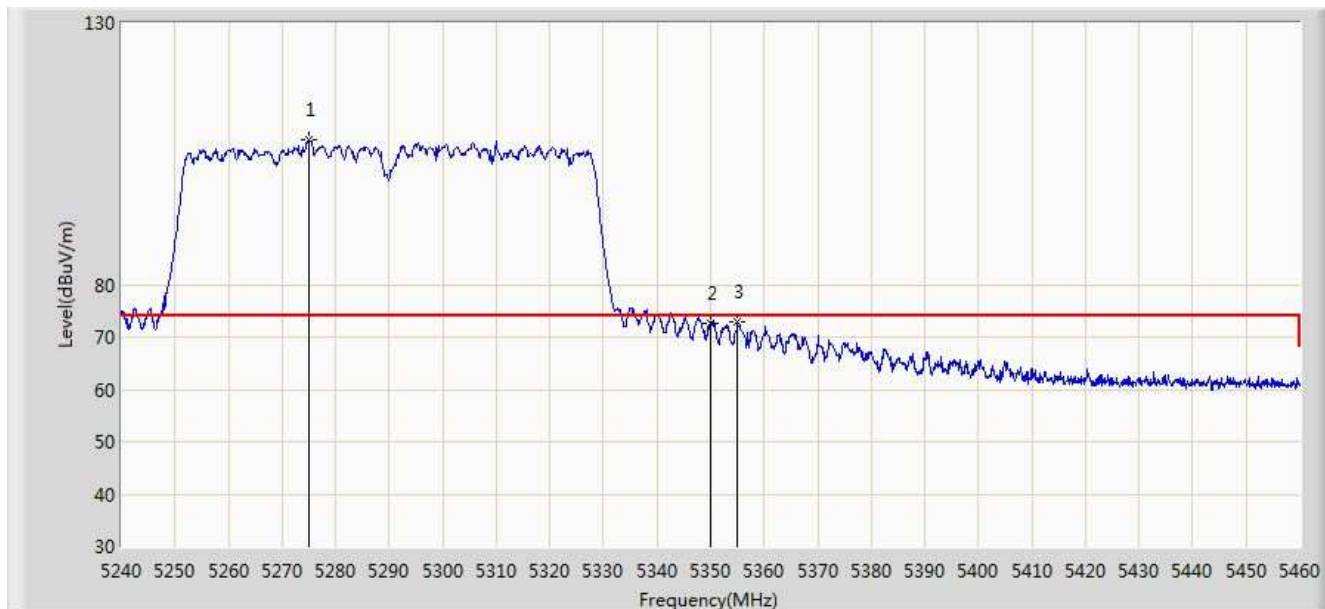


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5275.090	107.537	103.556	N/A	N/A	3.981	PK
2			5350.000	72.484	68.440	-1.516	74.000	4.044	PK
3			5354.950	72.992	68.944	-1.008	74.000	4.048	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2019/06/27 - 02:53
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D	Polarity: Vertical
EUT: Aruba 500 接入點	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at channel 5290MHz Ant 0 + 1	

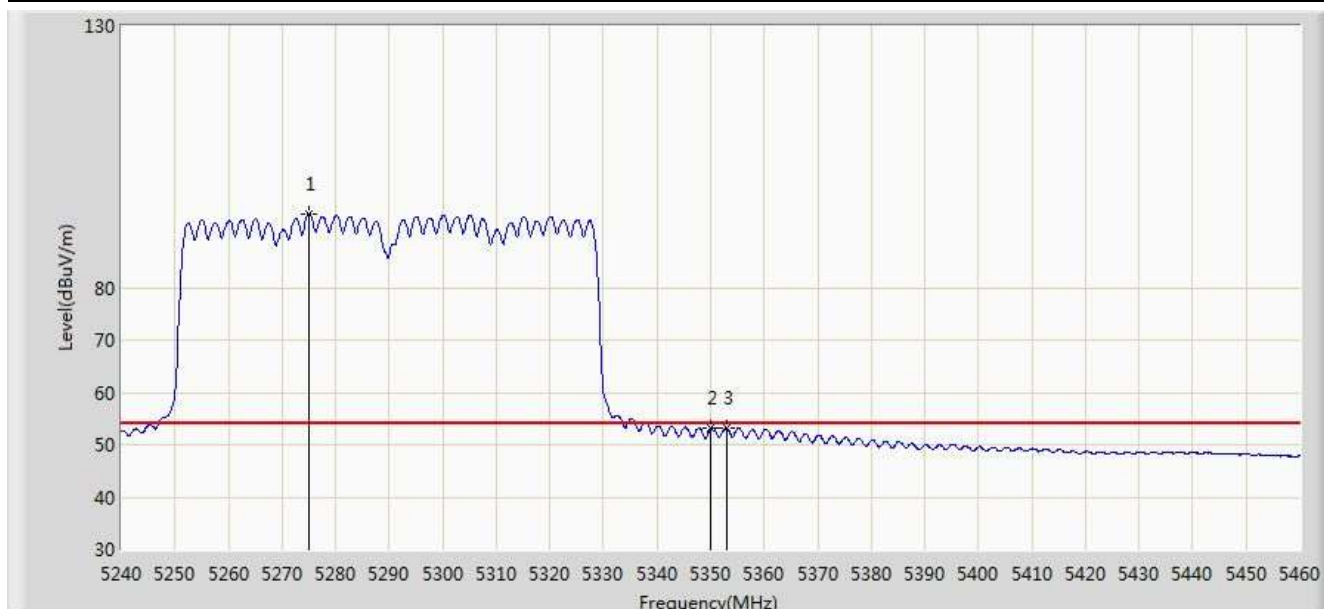


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5275.090	94.134	90.153	N/A	N/A	3.981	AV
2			5350.000	53.074	49.030	-0.926	54.000	4.044	AV
3			5353.080	53.077	49.030	-0.923	54.000	4.047	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2019/06/27 - 03:09
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D	Polarity: Horizontal
EUT: Aruba 500 接入點	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at channel 5530MHz Ant 0 + 1	

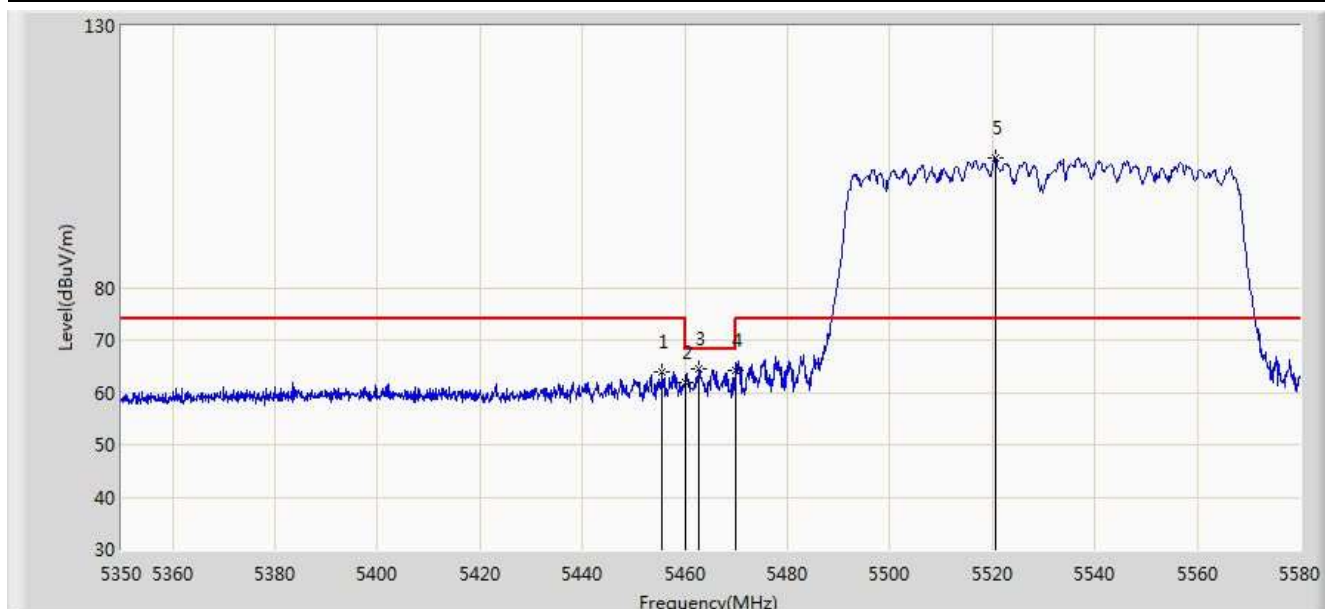


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5455.570	63.971	59.839	-10.029	74.000	4.132	PK
2			5460.000	61.831	57.695	-12.169	74.000	4.136	PK
3			5462.815	64.607	60.469	-3.593	68.200	4.138	PK
4			5470.000	64.281	60.137	-3.919	68.200	4.144	PK
5		*	5520.545	104.818	100.569	N/A	N/A	4.248	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2019/06/27 - 03:09
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D	Polarity: Horizontal
EUT: Aruba 500 接入點	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at channel 5530MHz Ant 0 + 1	

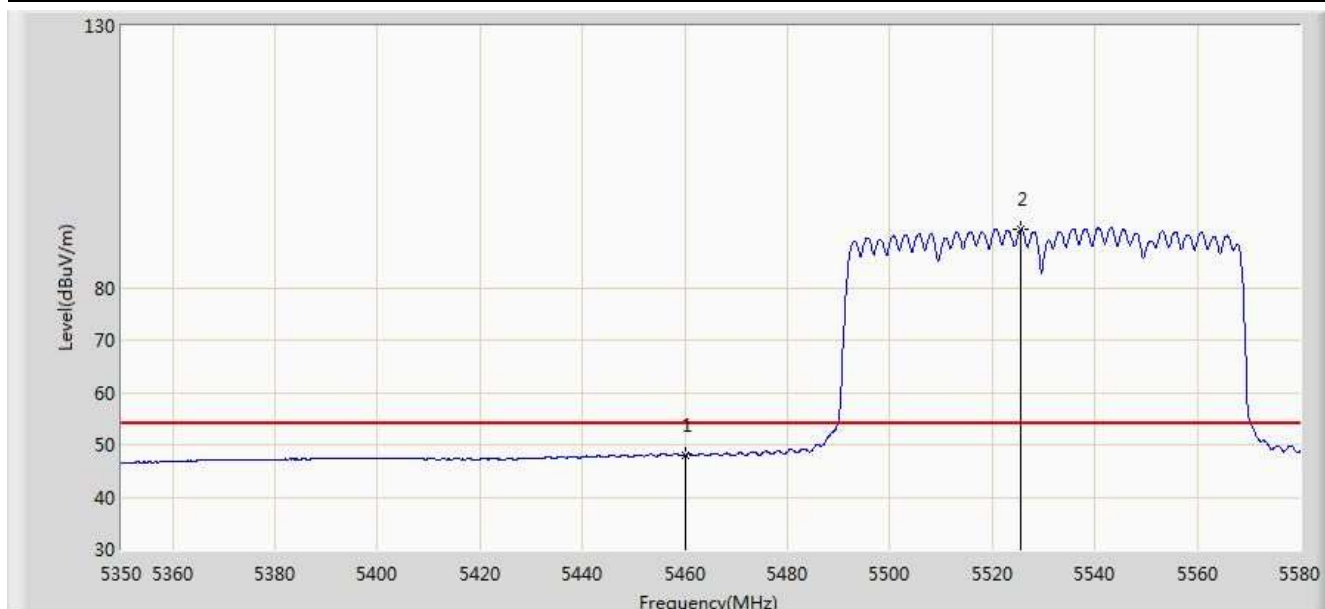


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	47.964	43.828	-6.036	54.000	4.136	AV
2		*	5525.490	91.070	86.802	N/A	N/A	4.268	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2019/06/27 - 03:05
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D	Polarity: Vertical
EUT: Aruba 500 接入點	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at channel 5530MHz Ant 0 + 1	

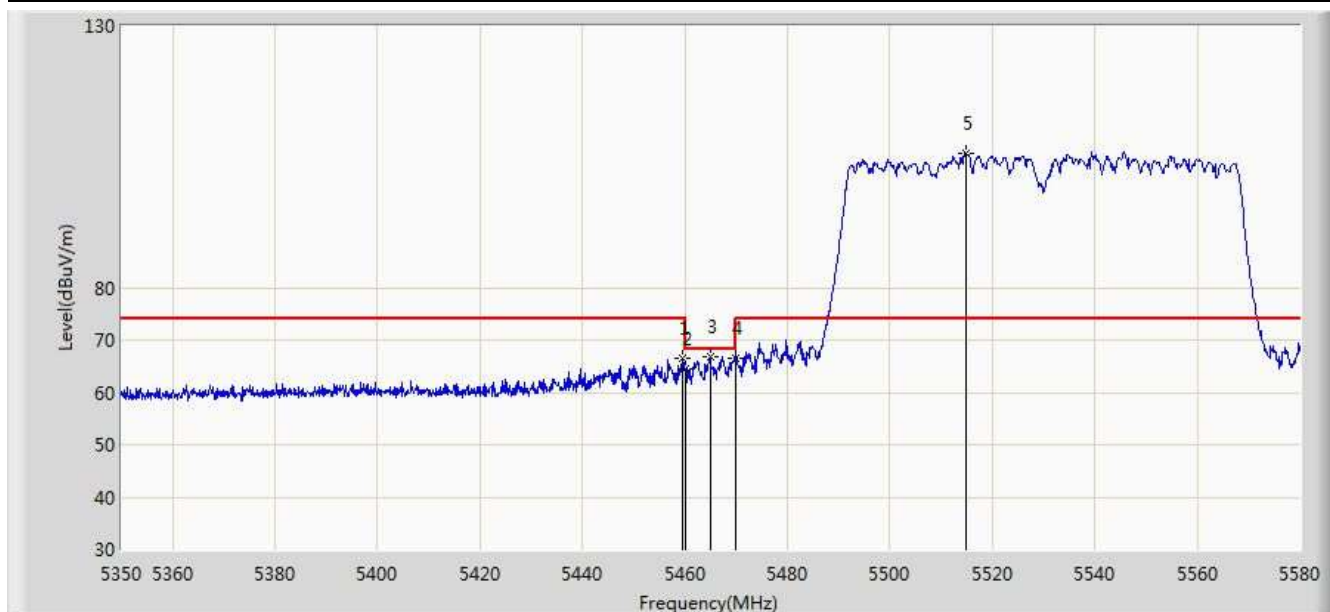


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5459.480	66.395	62.259	-7.605	74.000	4.136	PK
2			5460.000	64.349	60.213	-9.651	74.000	4.136	PK
3			5464.885	66.824	62.684	-1.376	68.200	4.140	PK
4			5470.000	66.442	62.298	-1.758	68.200	4.144	PK
5		*	5514.795	105.629	101.402	N/A	N/A	4.228	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2019/06/27 - 03:08
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D	Polarity: Vertical
EUT: Aruba 500 接入點	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at channel 5530MHz Ant 0 + 1	

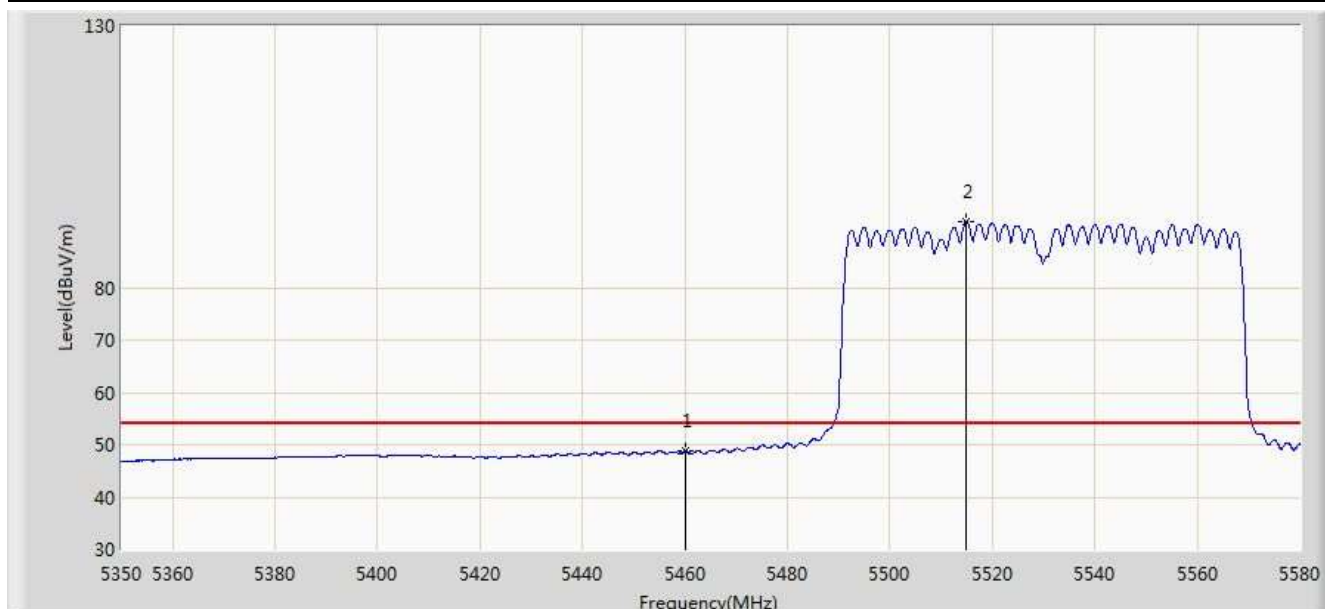


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	48.744	44.608	-5.256	54.000	4.136	AV
2		*	5514.910	92.589	88.362	N/A	N/A	4.228	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2019/06/27 - 03:15
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D	Polarity: Horizontal
EUT: Aruba 500 接入點	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at channel 5610MHz Ant 0 + 1	

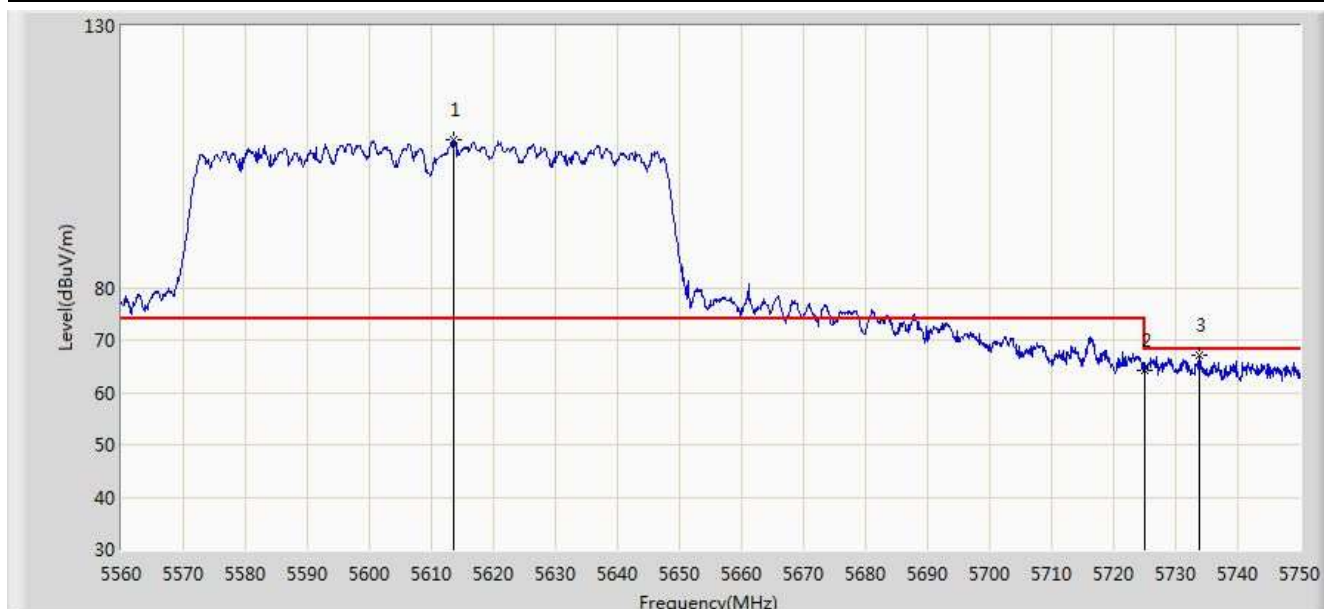


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5613.675	108.149	103.543	N/A	N/A	4.606	PK
2			5725.000	64.335	59.301	-3.865	68.200	5.034	PK
3			5733.850	67.159	62.091	-1.041	68.200	5.068	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2019/06/27 - 03:17
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D	Polarity: Vertical
EUT: Aruba 500 接入點	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at channel 5610MHz Ant 0 + 1	

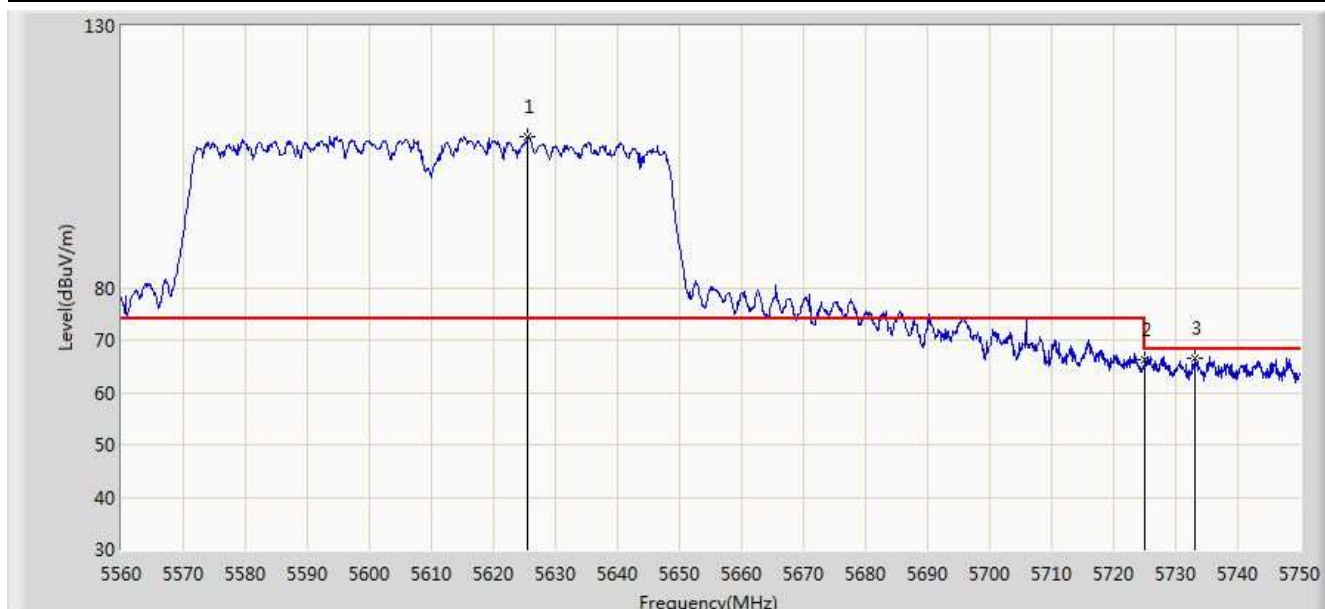


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5625.550	108.767	104.115	N/A	N/A	4.652	PK
2			5725.000	66.154	61.120	-2.046	68.200	5.034	PK
3			5733.185	66.536	61.471	-1.664	68.200	5.066	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2019/06/27 - 03:21
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D	Polarity: Horizontal
EUT: Aruba 500 接入點	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at channel 5775MHz Ant 0 + 1	

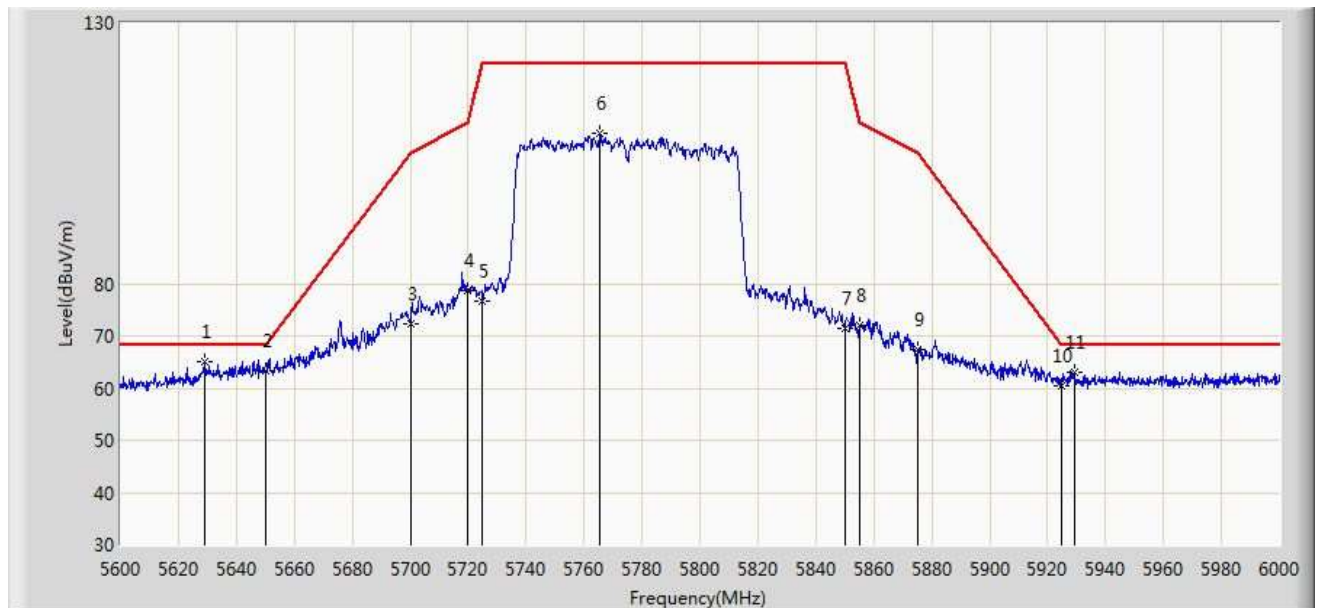


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5629.000	64.998	60.332	-3.202	68.200	4.666	PK
2			5650.000	63.324	58.578	-4.876	68.200	4.746	PK
3			5700.000	72.454	67.516	-32.746	105.200	4.938	PK
4			5720.000	78.556	73.541	-32.244	110.800	5.015	PK
5			5725.000	76.768	71.734	-45.432	122.200	5.034	PK
6			5765.600	108.766	103.576	N/A	N/A	5.190	PK
7			5850.000	71.465	65.951	-50.735	122.200	5.514	PK
8			5855.000	72.141	66.608	-38.659	110.800	5.533	PK
9			5875.000	67.499	61.889	-37.701	105.200	5.610	PK
10			5925.000	60.542	54.740	-7.658	68.200	5.802	PK
11			5929.200	63.175	57.357	-5.025	68.200	5.818	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2019/06/27 - 03:25
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D	Polarity: Vertical
EUT: Aruba 500 接入點	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at channel 5775MHz Ant 0 + 1	

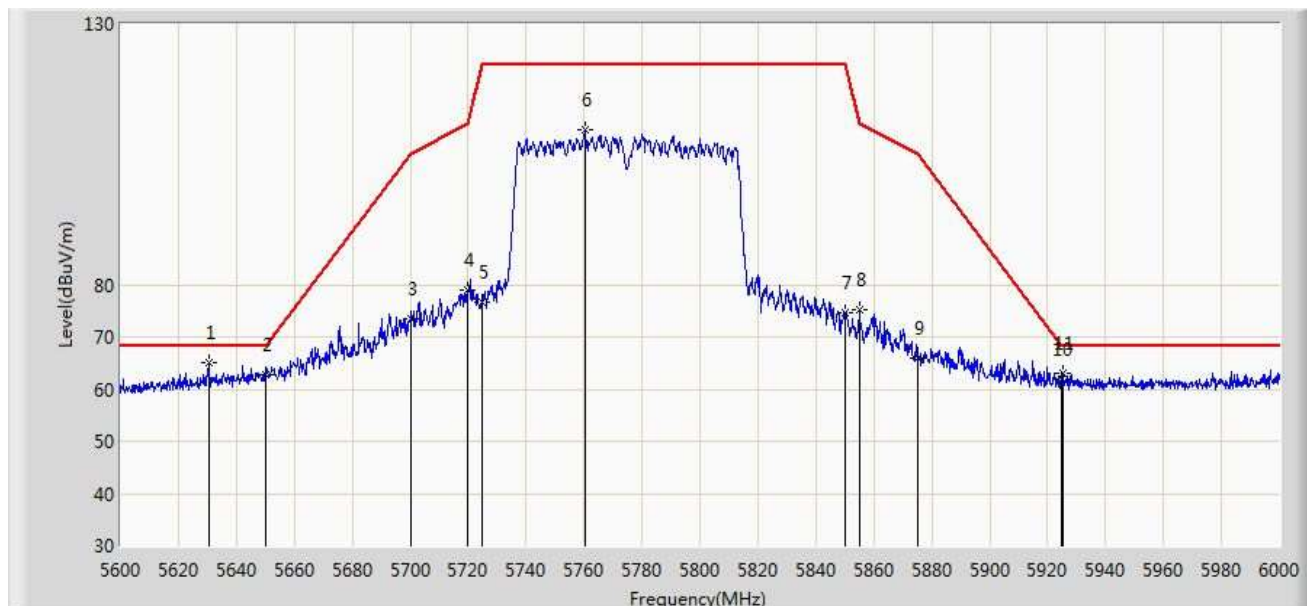


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5630.600	65.097	60.425	-3.103	68.200	4.672	PK
2			5650.000	62.616	57.870	-5.584	68.200	4.746	PK
3			5700.000	73.423	68.485	-31.777	105.200	4.938	PK
4			5720.000	79.043	74.028	-31.757	110.800	5.015	PK
5			5725.000	76.655	71.621	-45.545	122.200	5.034	PK
6			5760.200	109.635	104.466	N/A	N/A	5.168	PK
7			5850.000	74.658	69.144	-47.542	122.200	5.514	PK
8			5855.000	75.144	69.611	-35.656	110.800	5.533	PK
9			5875.000	65.947	60.337	-39.253	105.200	5.610	PK
10			5925.000	61.790	55.988	-6.410	68.200	5.802	PK
11			5925.200	62.977	57.175	-5.223	68.200	5.802	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2019/07/02 - 07:45
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D	Polarity: Horizontal
EUT: Aruba 500 接入點	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at channel 5180MHz Ant 0 + 1	

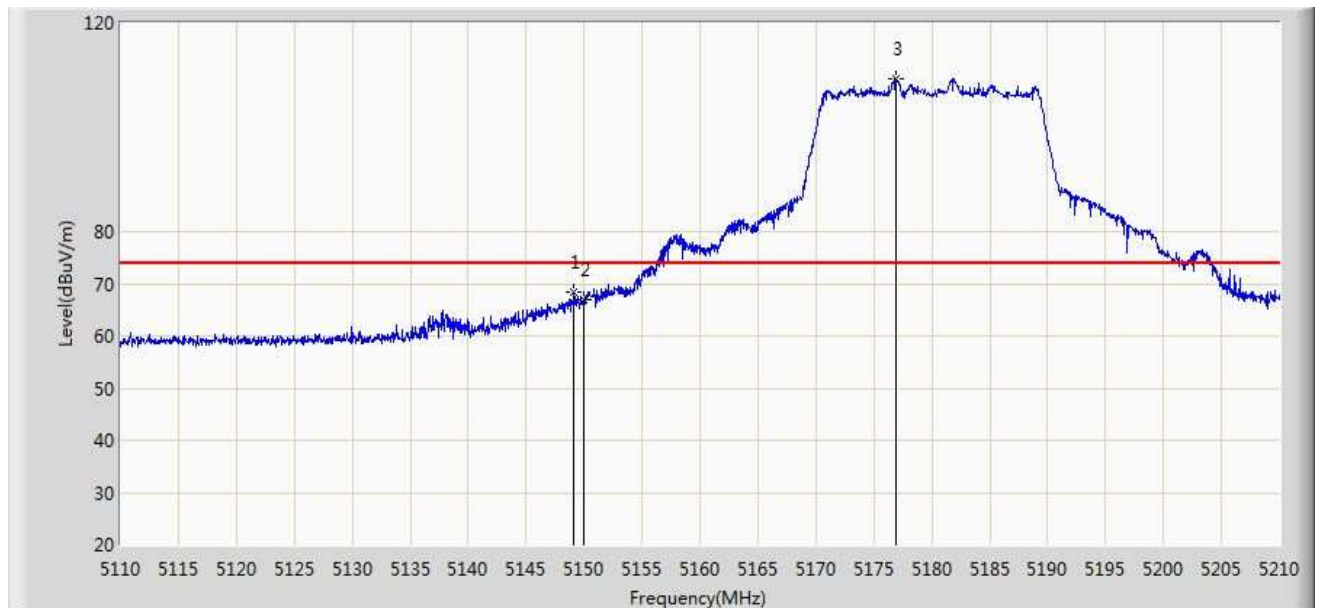

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5149.100	68.424	64.549	-5.576	74.000	3.875	PK
2			5150.000	66.840	62.964	-7.160	74.000	3.876	PK
3		*	5176.900	109.336	105.437	N/A	N/A	3.899	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2019/07/02 - 07:47
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D	Polarity: Horizontal
EUT: Aruba 500 接入點	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at channel 5180MHz Ant 0 + 1	




No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	49.518	45.642	-4.482	54.000	3.876	AV
2		*	5178.400	95.157	91.257	N/A	N/A	3.900	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2019/07/02 - 07:44
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D	Polarity: Vertical
EUT: Aruba 500 接入點	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at channel 5180MHz Ant 0 + 1	

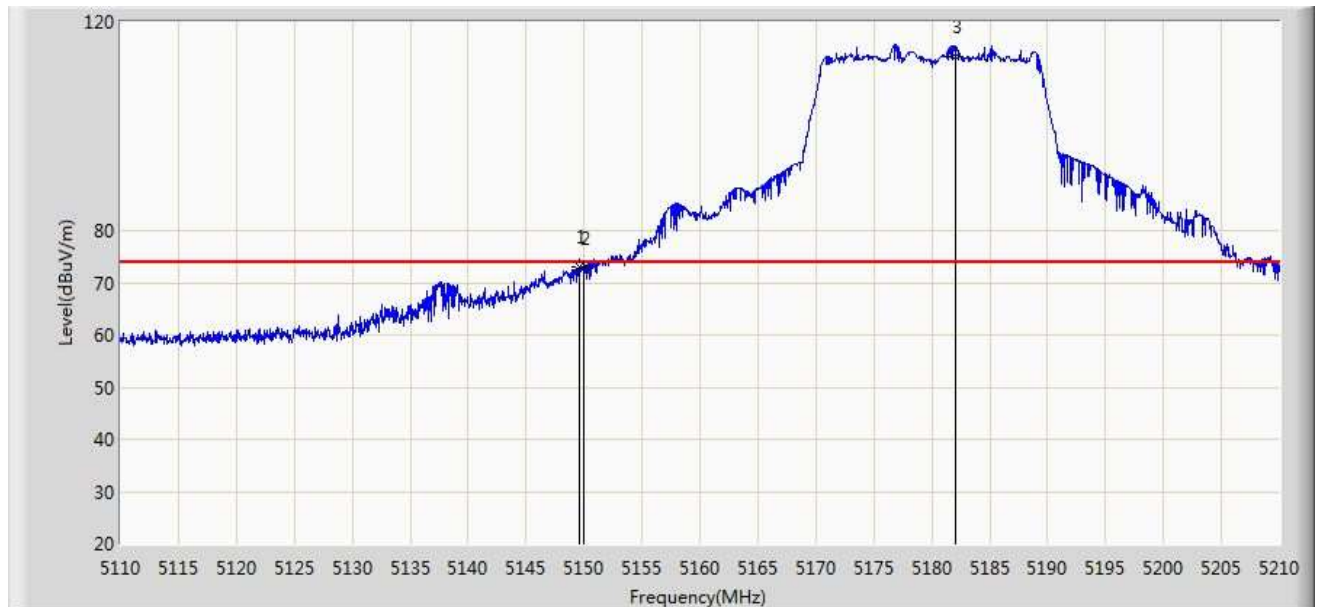


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5149.650	73.169	69.294	-0.831	74.000	3.875	PK
2			5150.000	72.871	68.995	-1.129	74.000	3.876	PK
3		*	5182.100	113.225	109.322	N/A	N/A	3.903	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2019/07/02 - 07:43
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D	Polarity: Vertical
EUT: Aruba 500 接入點	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at channel 5180MHz Ant 0 + 1	

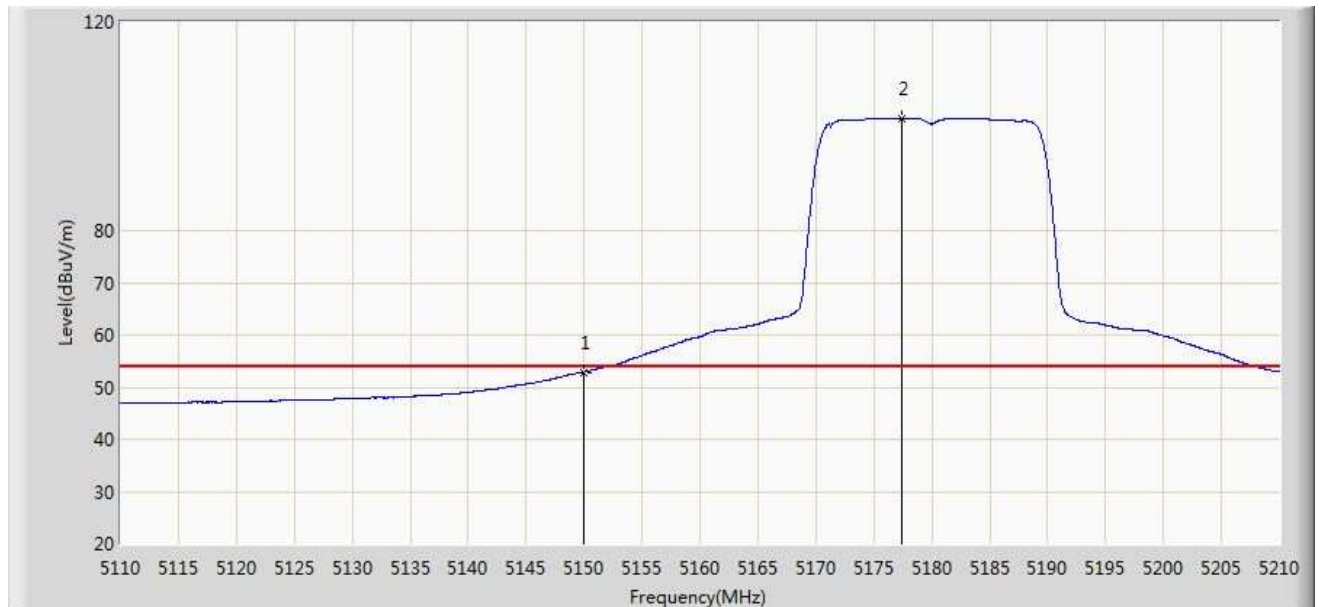


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	52.885	49.009	-1.115	54.000	3.876	AV
2		*	5177.450	101.440	97.541	N/A	N/A	3.899	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2019/06/27 - 03:48
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D	Polarity: Horizontal
EUT: Aruba 500 接入點	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at channel 5320MHz Ant 0 + 1	

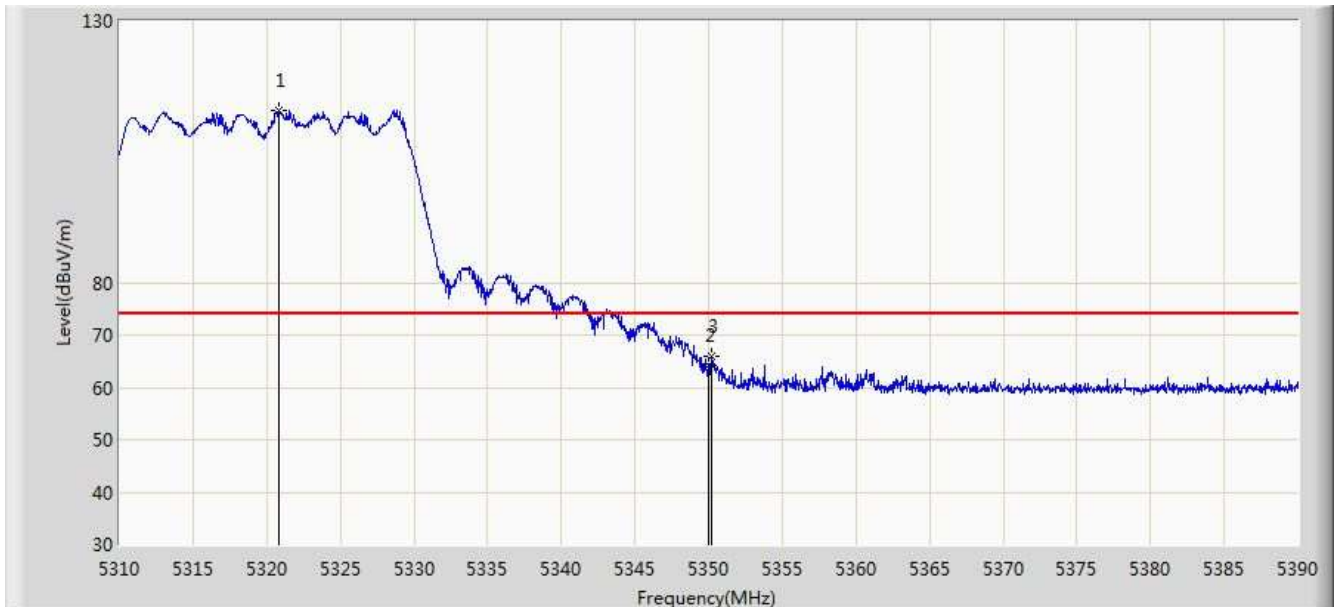


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5320.800	113.002	108.982	N/A	N/A	4.020	PK
2			5350.000	64.091	60.047	-9.909	74.000	4.044	PK
3			5350.160	65.896	61.852	-8.104	74.000	4.044	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2019/06/27 - 03:51
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D	Polarity: Horizontal
EUT: Aruba 500 接入點	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at channel 5320MHz Ant 0 + 1	

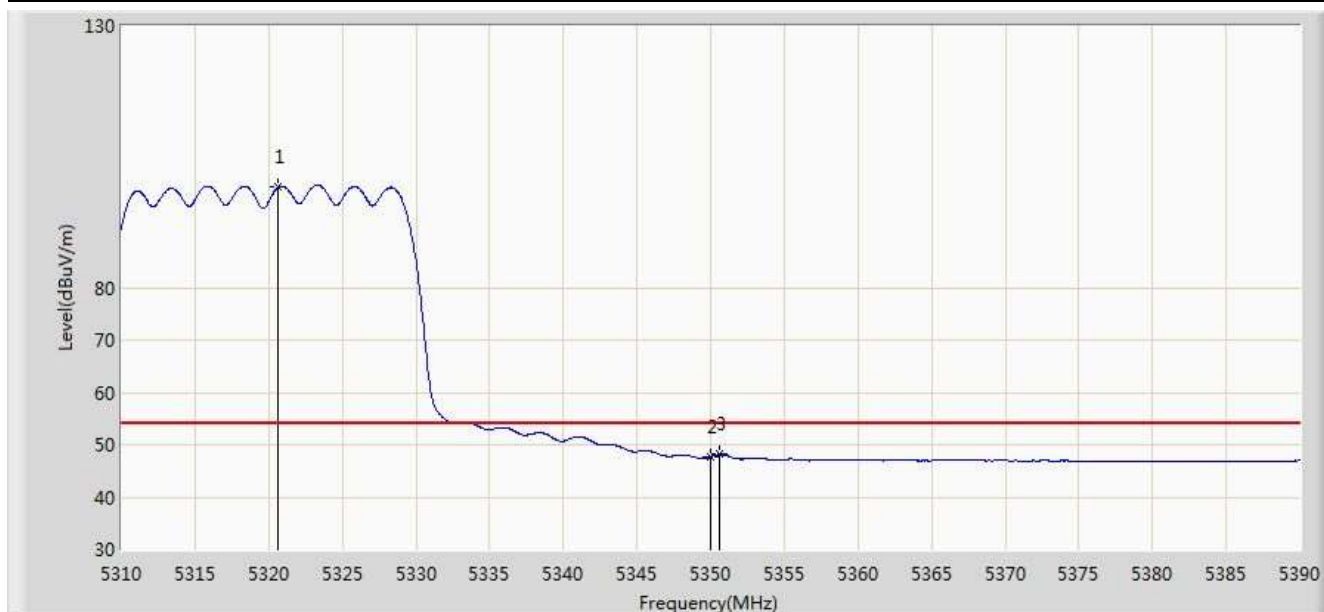


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5320.640	99.189	95.170	N/A	N/A	4.019	AV
2			5350.000	47.713	43.669	-6.287	54.000	4.044	AV
3			5350.640	48.184	44.139	-5.816	54.000	4.045	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2019/06/27 - 03:52
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D	Polarity: Vertical
EUT: Aruba 500 接入點	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at channel 5320MHz Ant 0 + 1	

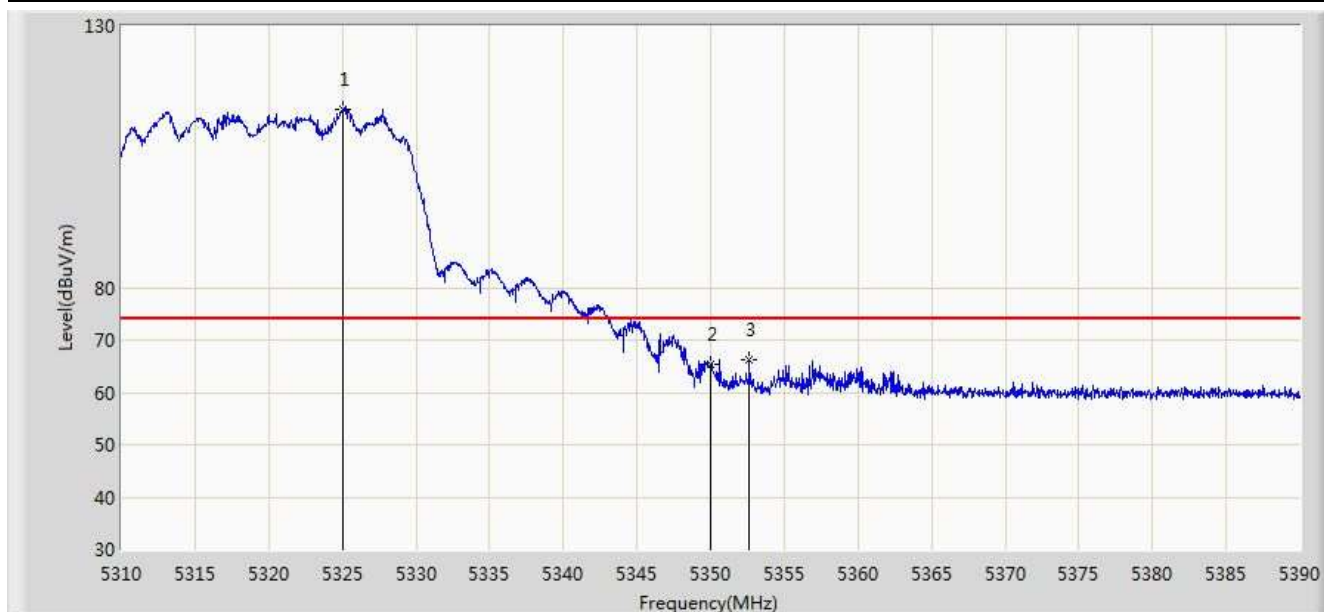

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5325.040	114.012	109.989	N/A	N/A	4.023	PK
2			5350.000	65.349	61.305	-8.651	74.000	4.044	PK
3			5352.640	66.345	62.298	-7.655	74.000	4.047	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2019/06/27 - 03:54
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D	Polarity: Vertical
EUT: Aruba 500 接入點	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at channel 5320MHz Ant 0 + 1	




No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5317.800	100.396	96.379	N/A	N/A	4.017	AV
2			5350.000	48.265	44.221	-5.735	54.000	4.044	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2019/06/27 - 03:56
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D	Polarity: Horizontal
EUT: Aruba 500 接入點	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at channel 5500MHz Ant 0 + 1	

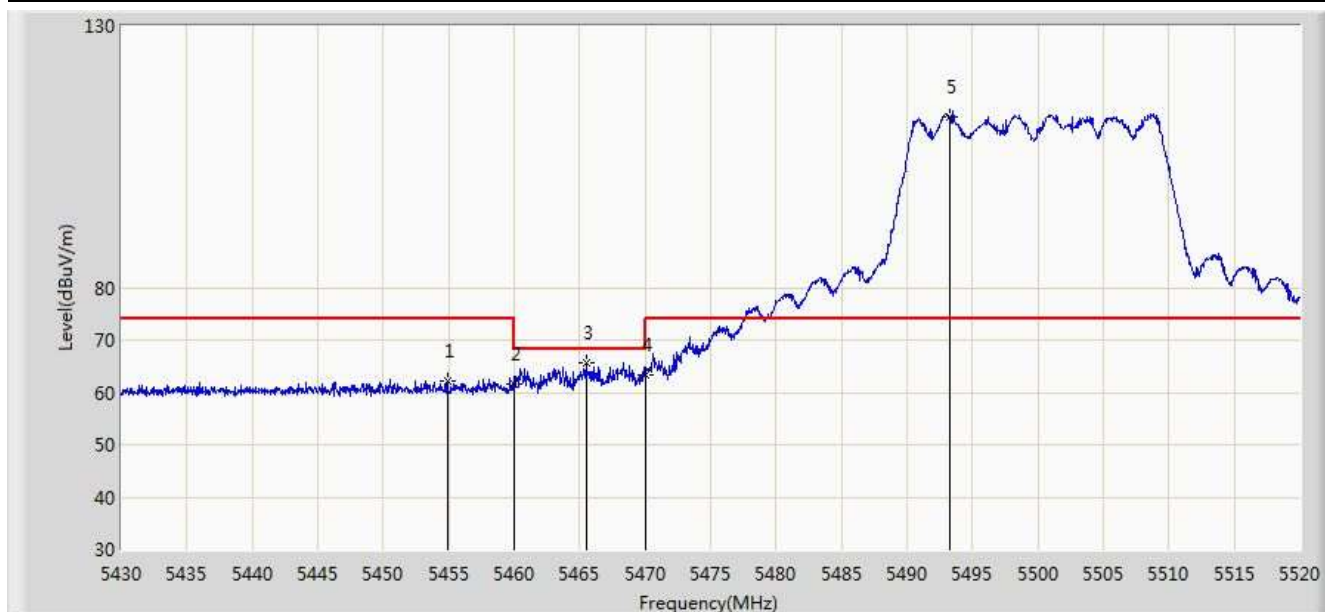


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5454.885	62.201	58.069	-11.799	74.000	4.132	PK
2			5460.000	61.483	57.347	-12.517	74.000	4.136	PK
3		*	5465.505	65.664	61.523	-2.536	68.200	4.141	PK
4			5470.000	63.472	59.328	-4.728	68.200	4.144	PK
5		*	5493.225	112.608	108.439	N/A	N/A	4.169	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2019/06/27 - 03:59
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D	Polarity: Horizontal
EUT: Aruba 500 接入點	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at channel 5500MHz Ant 0 + 1	

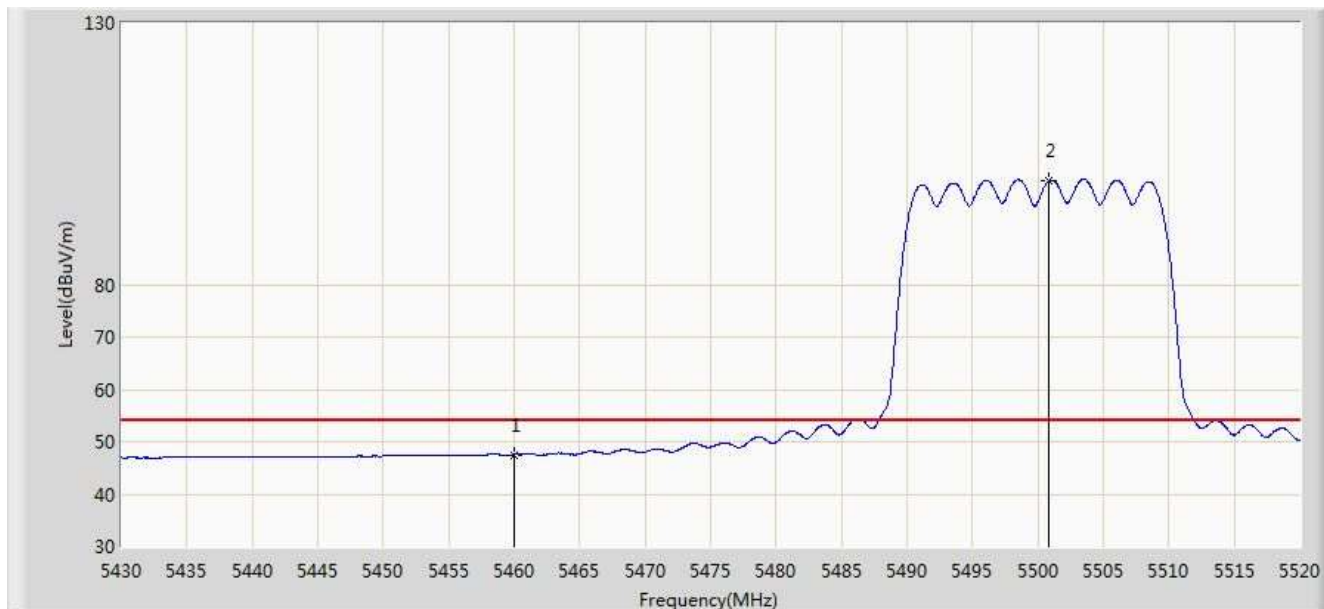


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	47.536	43.400	-6.464	54.000	4.136	AV
2		*	5500.830	99.766	95.584	N/A	N/A	4.183	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2019/06/27 - 04:01
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D	Polarity: Vertical
EUT: Aruba 500 接入點	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at channel 5500MHz Ant 0 + 1	

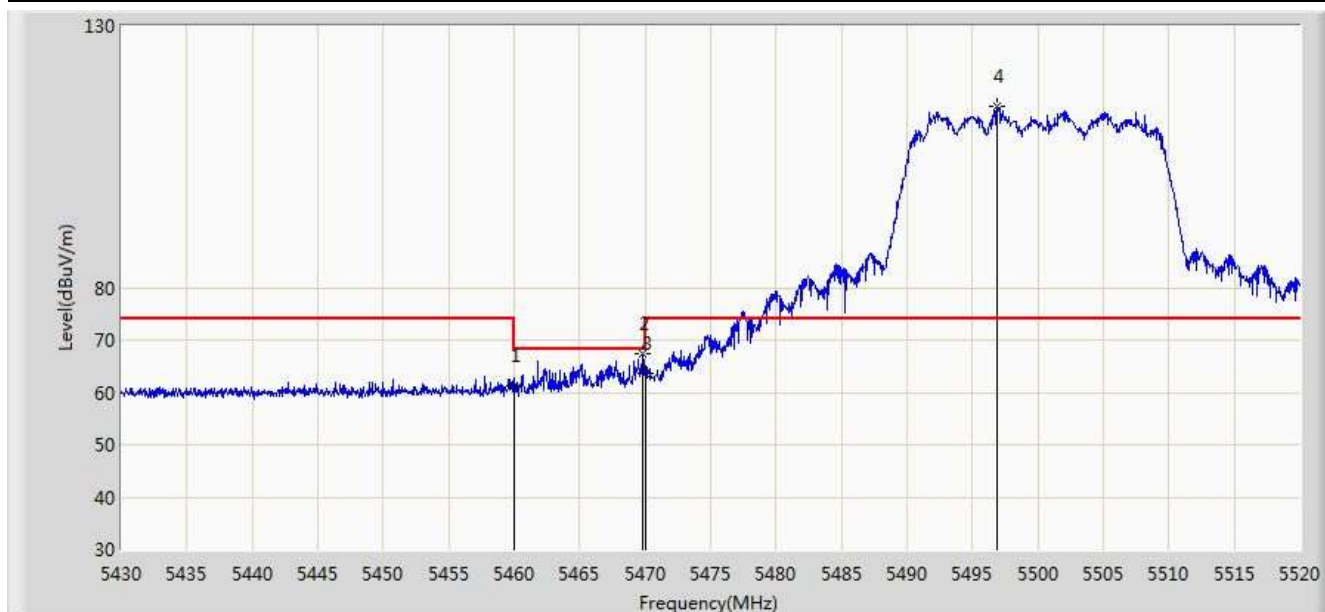


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	61.219	57.083	-12.781	74.000	4.136	PK
2			5469.825	67.312	63.168	-0.888	68.200	4.144	PK
3			5470.000	63.576	59.432	-4.624	68.200	4.144	PK
4		*	5496.870	114.687	110.511	N/A	N/A	4.176	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2019/06/27 - 04:04
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D	Polarity: Vertical
EUT: Aruba 500 接入點	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at channel 5500MHz Ant 0 + 1	

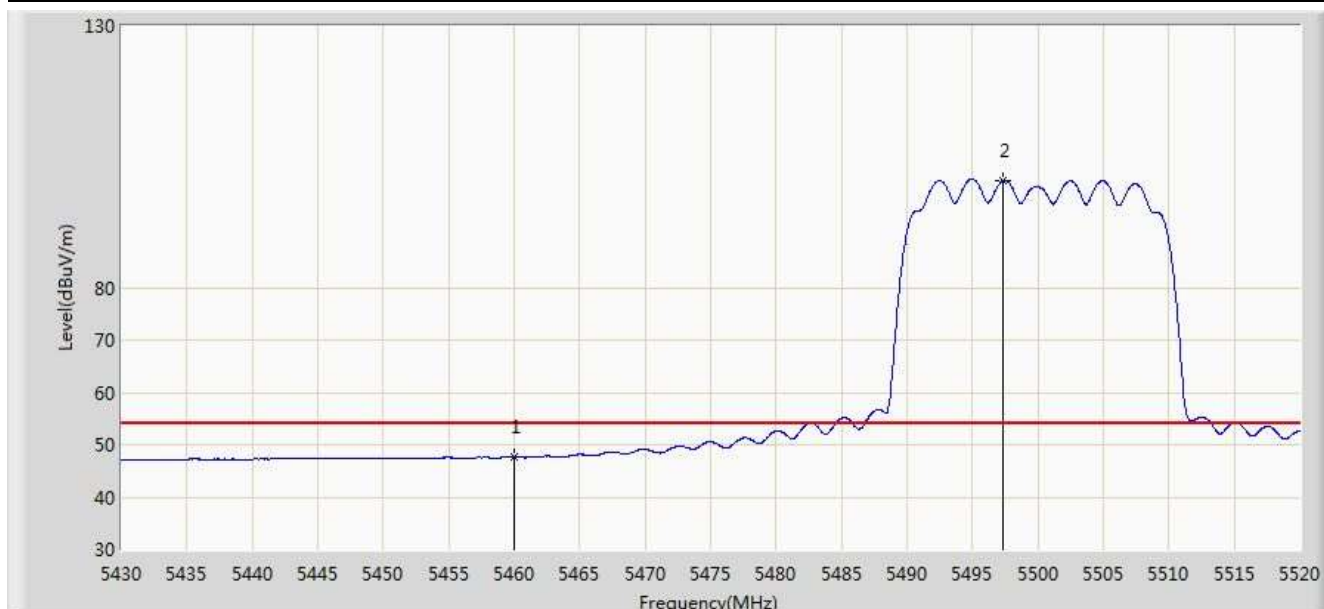


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	47.739	43.603	-6.261	54.000	4.136	AV
2		*	5497.275	100.405	96.229	N/A	N/A	4.177	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2019/06/27 - 04:12
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D	Polarity: Horizontal
EUT: Aruba 500 接入點	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at channel 5700MHz	

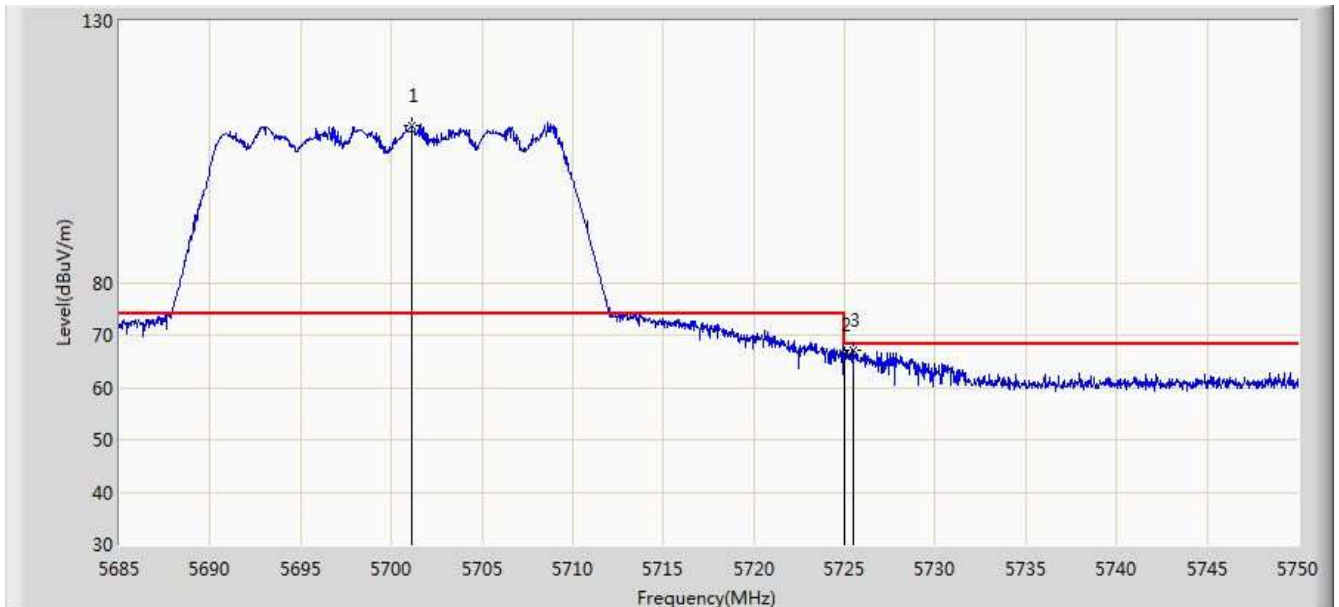


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5701.120	110.107	105.165	N/A	N/A	4.942	PK
2			5725.000	66.235	61.201	-1.965	68.200	5.034	PK
3			5725.495	67.044	62.008	-1.156	68.200	5.035	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2019/06/27 - 04:09
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D	Polarity: Vertical
EUT: Aruba 500 接入點	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at channel 5700MHz	

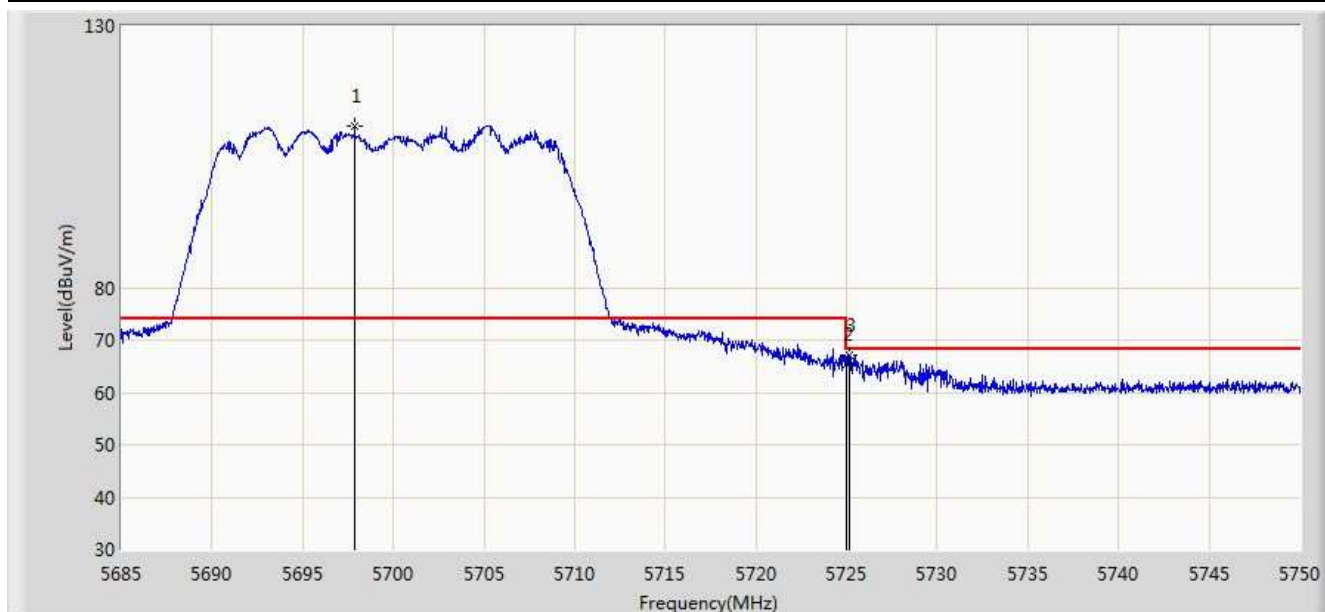


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5697.870	110.909	105.979	N/A	N/A	4.929	PK
2			5725.000	65.480	60.446	-2.720	68.200	5.034	PK
3			5725.170	66.982	61.948	-1.218	68.200	5.034	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2019/06/27 - 04:16
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D	Polarity: Horizontal
EUT: Aruba 500 接入點	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at channel 5745MHz Ant 0 + 1	

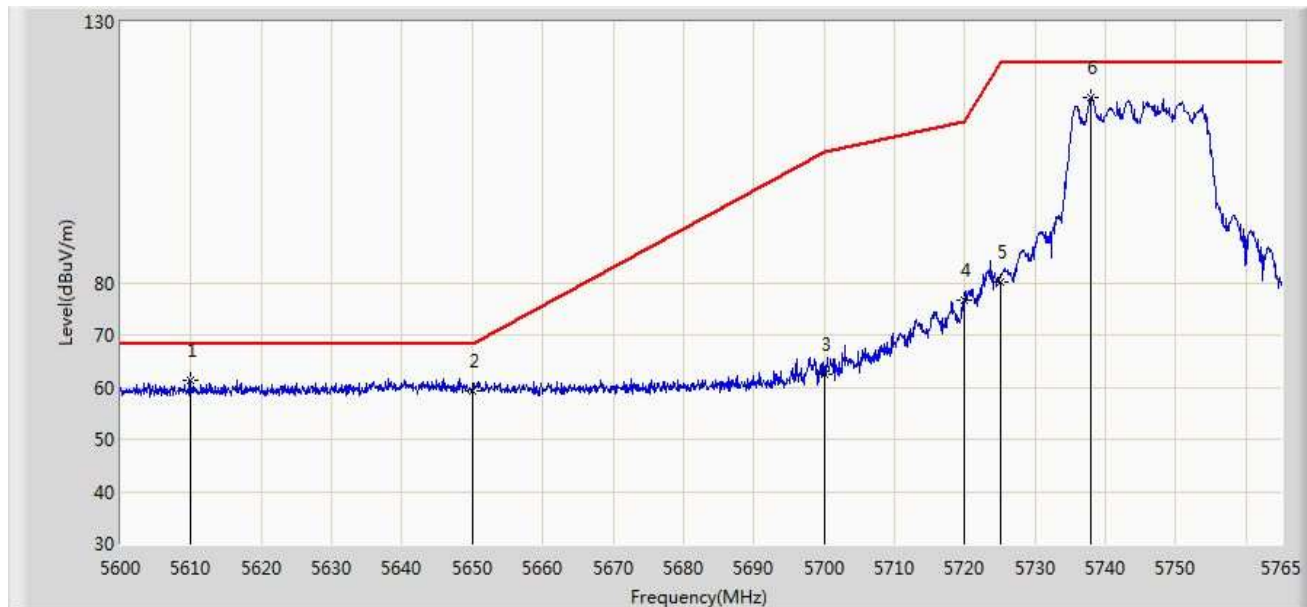


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5609.900	61.313	56.721	-6.887	68.200	4.592	PK
2			5650.000	59.376	54.630	-8.824	68.200	4.746	PK
3			5700.000	62.413	57.475	-42.787	105.200	4.938	PK
4			5720.000	76.613	71.598	-34.187	110.800	5.015	PK
5			5725.000	80.222	75.188	-41.978	122.200	5.034	PK
6		*	5737.940	115.451	110.368	N/A	N/A	5.084	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2019/06/27 - 04:18
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D	Polarity: Vertical
EUT: Aruba 500 接入點	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at channel 5745MHz Ant 0 + 1	

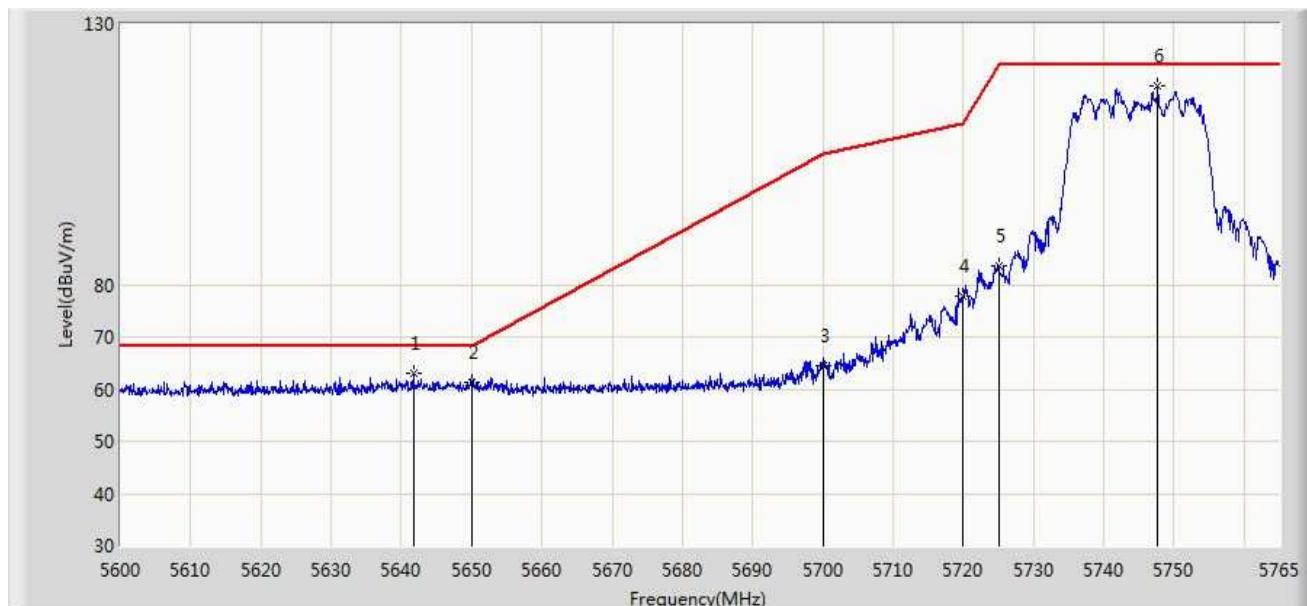


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5641.745	63.036	58.321	-5.164	68.200	4.714	PK
2			5650.000	61.229	56.483	-6.971	68.200	4.746	PK
3			5700.000	64.622	59.684	-40.578	105.200	4.938	PK
4			5720.000	77.813	72.798	-32.987	110.800	5.015	PK
5			5725.000	83.645	78.611	-38.555	122.200	5.034	PK
6		*	5747.675	118.238	113.117	N/A	N/A	5.122	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2019/06/27 - 04:22
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D	Polarity: Horizontal
EUT: Aruba 500 接入點	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at channel 5825MHz Ant 0 + 1	

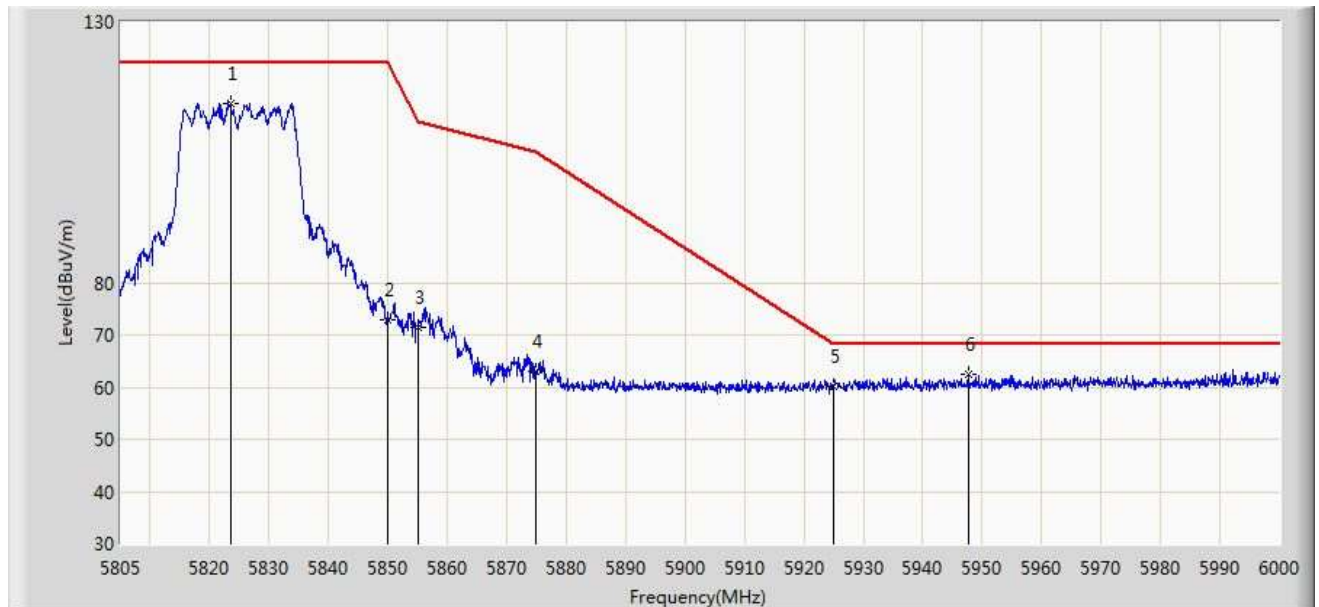


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5823.525	114.318	108.905	N/A	N/A	5.412	PK
2			5850.000	72.825	67.311	-49.375	122.200	5.514	PK
3			5855.000	71.533	66.000	-39.267	110.800	5.533	PK
4			5875.000	62.956	57.346	-42.244	105.200	5.610	PK
5			5925.000	60.013	54.211	-8.187	68.200	5.802	PK
6		*	5947.643	62.347	56.458	-5.853	68.200	5.889	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2019/06/27 - 04:23
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D	Polarity: Vertical
EUT: Aruba 500 接入點	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at channel 5825MHz Ant 0 + 1	

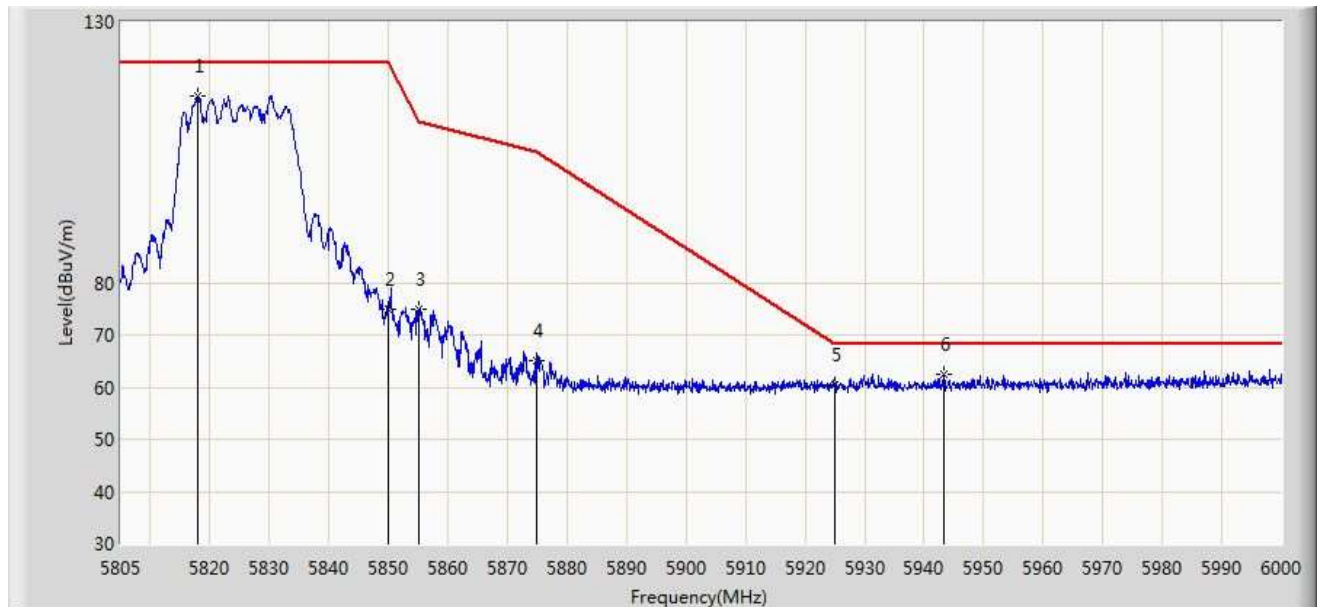


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5817.967	115.925	110.534	N/A	N/A	5.391	PK
2			5850.000	74.847	69.333	-47.353	122.200	5.514	PK
3			5855.000	74.898	69.365	-35.902	110.800	5.533	PK
4			5875.000	65.173	59.563	-40.027	105.200	5.610	PK
5			5925.000	60.292	54.490	-7.908	68.200	5.802	PK
6		*	5943.353	62.330	56.457	-5.870	68.200	5.873	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2019/07/02 - 20:52
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D	Polarity: Horizontal
EUT: Aruba 500 接入點 Aruba 500 接入點	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at channel 5190MHz Ant 0 + 1	

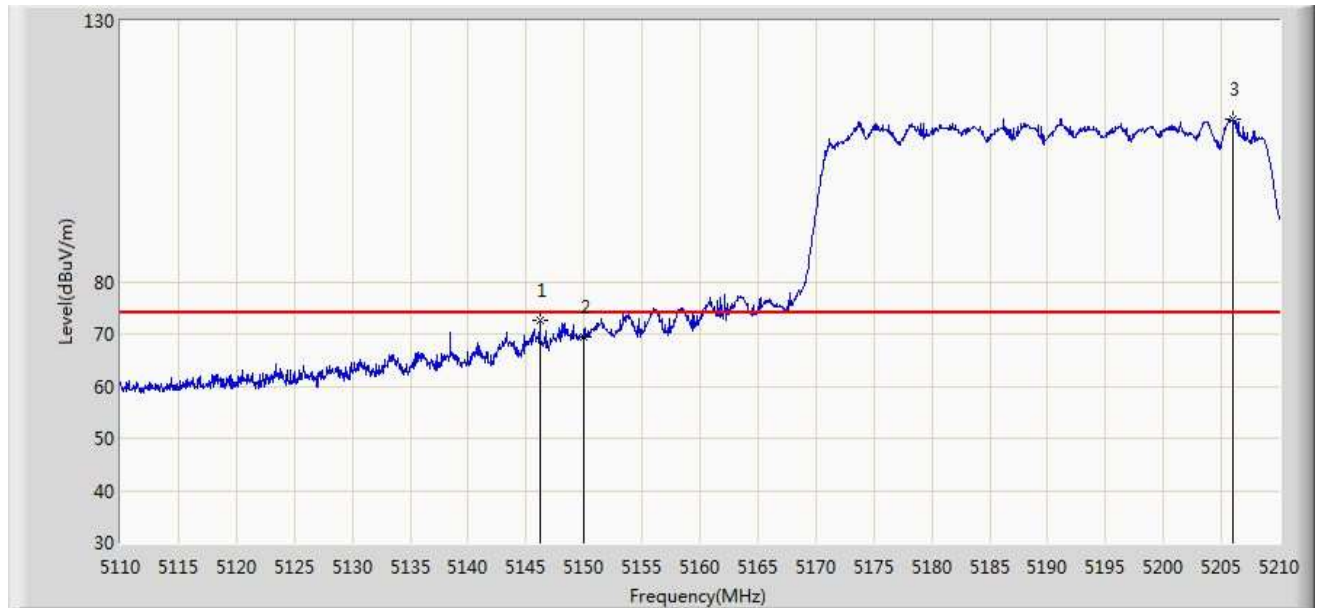


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5146.200	72.530	68.658	-1.470	74.000	3.872	PK
2			5150.000	69.337	65.461	-4.663	74.000	3.876	PK
3		*	5205.950	111.177	107.254	N/A	N/A	3.923	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2019/07/02 - 20:55
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D	Polarity: Horizontal
EUT: Aruba 500 接入點	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at channel 5190MHz Ant 0 + 1	

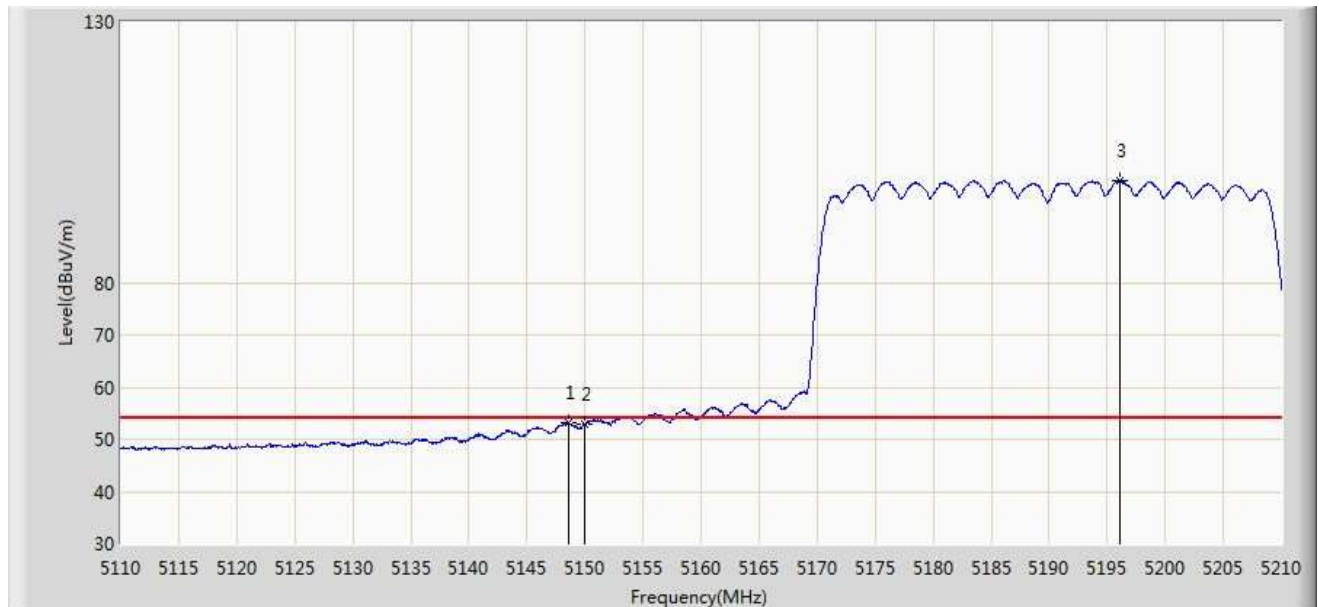


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5148.650	53.123	49.248	-0.877	54.000	3.875	AV
2			5150.000	52.935	49.059	-1.065	54.000	3.876	AV
3		*	5196.100	99.596	95.681	N/A	N/A	3.915	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2019/07/02 - 20:59
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D	Polarity: Vertical
EUT: Aruba 500 接入點	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at channel 5190MHz Ant 0 + 1	

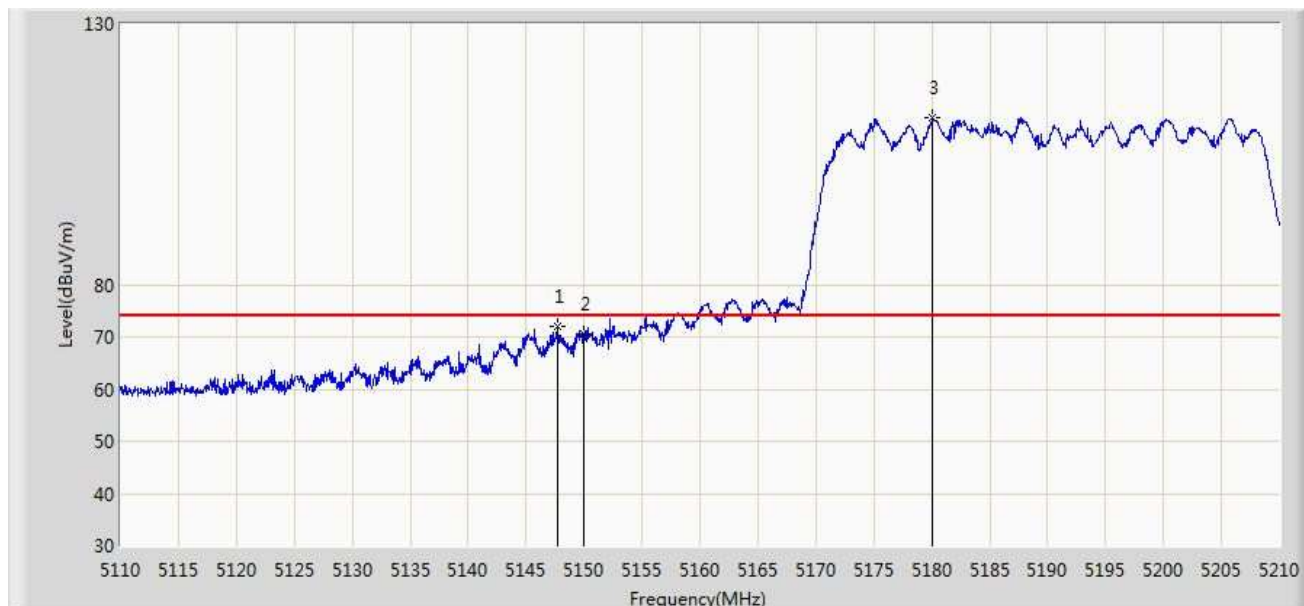


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5147.750	71.890	68.016	-2.110	74.000	3.874	PK
2			5150.000	70.535	66.659	-3.465	74.000	3.876	PK
3		*	5180.100	111.917	108.015	N/A	N/A	3.902	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2019/07/02 - 21:02
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D	Polarity: Vertical
EUT: Aruba 500 接入點	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at channel 5190MHz Ant 0 + 1	

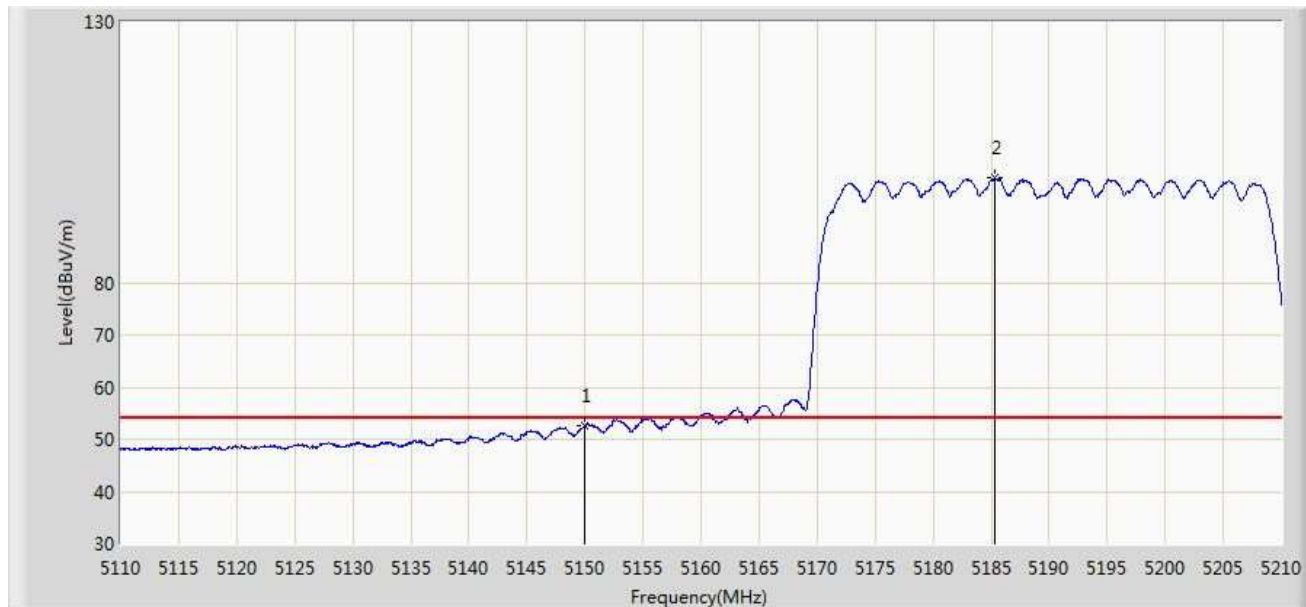


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	52.541	48.665	-1.459	54.000	3.876	AV
2		*	5185.300	100.064	96.158	N/A	N/A	3.906	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2019/07/02 - 21:09
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D	Polarity: Horizontal
EUT: Aruba 500 接入點	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at channel 5310MHz Ant 0 + 1	

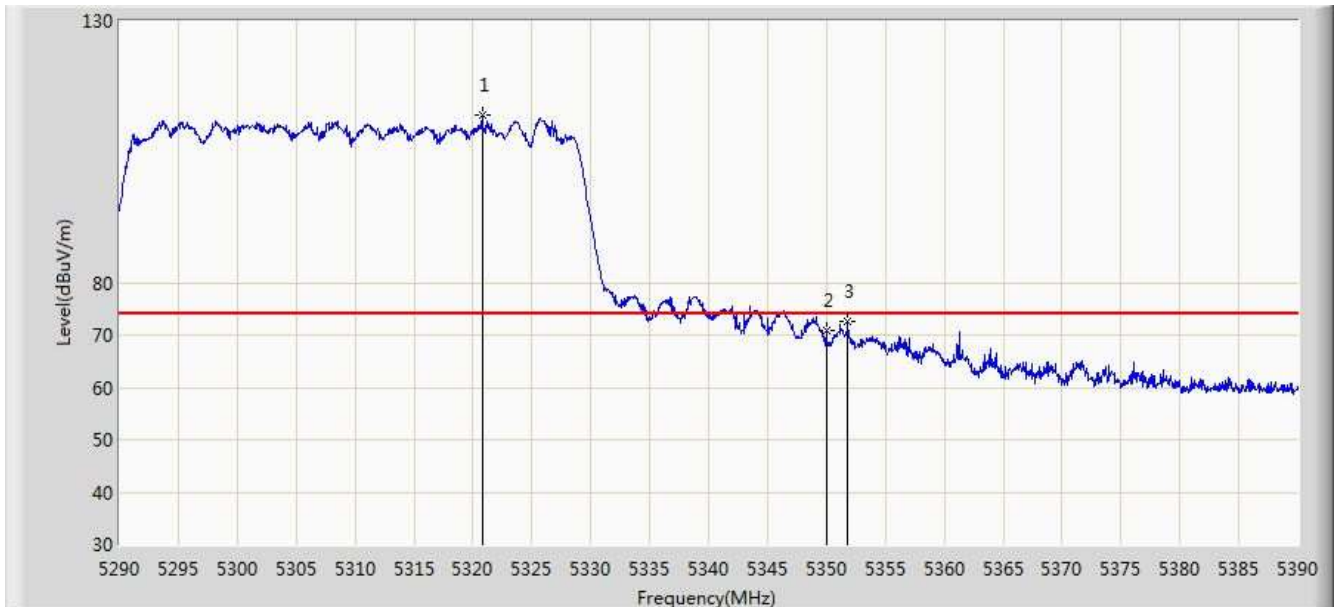

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5320.800	111.940	107.920	N/A	N/A	4.020	PK
2			5350.000	70.954	66.910	-3.046	74.000	4.044	PK
3			5351.800	72.694	68.648	-1.306	74.000	4.046	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)