

JAPAN MIC

TEST REPORT

For

Signify (China) Investment Co., Ltd.

Building No.9, Lane 888, Tianlin Road, Minhang district, 200233 Shanghai, China

Tested Model: 44228007015



Report Type: Original Report	Product Name: Hue Connect
Report Number: RKS260326012-24B	
Report Date: 2026-05-27	
Reviewed By: Jenny Yang	
Approved By: Kyle Xu	
Test Laboratory: Bay Area Compliance Laboratories Corp. (Kunshan) No.248 Chenghu Road, Kunshan, Jiangsu Province, China Tel: +86-512-86175000 Fax: +86-512-88934268 www.baclcorp.com.cn	

TABLE OF CONTENTS

REPORT REVISION HISTORY.....	3
GENERAL INFORMATION.....	4
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....	4
OBJECTIVE	4
TEST METHODOLOGY	4
TEST FACILITY	4
MEASUREMENT UNCERTAINTY.....	5
EUT TEST CONFIGURATION	6
DESCRIPTION OF TEST CONFIGURATION	6
TEST CONDITIONS	6
EUT EXERCISE SOFTWARE	6
SUPPORT EQUIPMENT LIST AND DETAILS	7
EXTERNAL I/O CABLE.....	7
SUMMARY OF TEST RESULTS.....	8
TEST EQUIPMENT LIST	9
FREQUENCY ERROR	10
LIMIT	10
TEST PROCEDURE	10
OCCUPIED BANDWIDTH	11
LIMIT	11
TEST PROCEDURE	11
TRANSMITTER SPURIOUS EMISSION STRENGTH AND UNWANTED EMISSION INTENSITY.....	12
LIMIT	12
TEST PROCEDURE	12
ANTENNA OUTPUT POWER AND ANTENNA POWER TOLERANCE.....	14
LIMIT	14
TEST PROCEDURE	14
TEST SETUP BLOCK DIAGRAM.....	14
RECEIVER SPURIOUS EMISSION AND UNWANTED EMISSION INTENSITY	15
LIMIT	15
TEST PROCEDURE	15
INTERFERENCE PREVENTION FUNCTION.....	16
REQUIREMENT	16
TEST PROCEDURE	16
CONSTRUCTION PROTECTION CONFIRMATION	17
LIMIT	17
CONFIRMATION METHOD.....	17
APPENDIX-TEST DATA.....	18
FREQUENCY ERROR.....	18
OCCUPIED BANDWIDTH	20
TRANSMITTER SPURIOUS EMISSION STRENGTH AND UNWANTED EMISSION INTENSITY	22
ANTENNA OUTPUT POWER AND ANTENNA POWER TOLERANCE.....	26
RECEIVER SPURIOUS EMISSION AND UNWANTED EMISSION INTENSITY.....	27

REPORT REVISION HISTORY

Number of Revisions	Report No.	Version	Issue Date	Description
0	RKSB260326012-24B	R1V1	2026-05-27	Initial Release

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

Applicant:	Signify (China) Investment Co., Ltd.
Tested Model:	44228007015
Series Model	44228007014
Model Difference:	GPIO head and relative components(see the declaration letter for the details)
Product Name:	Hue Connect
Power Supply:	DC 24V
RF Function:	ZigBee & Thread
Operating Band/Frequency:	2405-2480 MHz
RF output power:	4.0 mW
Modulation Type:	O-QPSK
★Maximum Antenna Gain:	2.2 dBi

Note:

- 1、The maximum antenna gain was provided by the manufacturer.
- 2、The device supports ZigBee and Thread modes. Their RF characteristics are identical, so only ZigBee test data are recorded in the report.

All measurement and test data in this report was gathered from production sample serial number: RKSB260326012-1 (Assigned by the BACL (Kunshan). The EUT supplied by the applicant was received on 2026-03-26.)

Objective

The objective of the manufacturer is to demonstrate compliance with Radio Law of Japan item 19 of Article 2 Paragraph 1

Test Methodology

All measurements contained in this report were conducted with technical regulations of the Radio Law of Japan MIC Notice No.88 Appendix No.43

Test Facility

The test site used by Bay Area Compliance Laboratories Corp. (Kunshan) to collect test data is located on the No.248 Chenghu Road, Kunshan, Jiangsu province, China.

Measurement Uncertainty

Parameter	Measurement Uncertainty
Frequency Error	$\pm 0.5\text{ppm}$
Occupied Bandwidth	$\pm 0.5\text{kHz}$
RF Output Power, Conducted	$\pm 0.5\text{dB}$
Unwanted Emissions (TX&RX), Conducted	$\pm 3.19\text{dB}$
Temperature	$\pm 1^{\circ}\text{C}$
Humidity	$\pm 6\%$
DC and Low Frequency Voltages	$\pm 0.04\%$
Duty Cycle	1%

EUT TEST CONFIGURATION

Description of Test Configuration

Test channel list is as below,

The system was configured in testing mode which was provided by manufacturer, below is the channel list:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
11	2405	19	2445
12	2410	20	2450
13	2415	21	2455
14	2420	22	2460
15	2425	23	2465
16	2430	24	2470
17	2435	25	2475
18	2440	26	2480

EUT was tested with channel 11, 18 and 26.

Test conditions

Voltage Fluctuation Test	Normal Voltage DC (V)	Low Voltage (-10%Normal voltage) DC (V)	High Voltage (+10%Normal voltage) DC (V)
Input DC Power	24.00	21.60	26.40
Input IC Power	3.317	3.316	3.317
Voltage Variation (%)	0	-0.03	0

Based on above table, the fluctuation of power supply to the RF circuit of EUT is equal to or less than +/- 1%. exempt extremely high and low supply voltage condition tests, EUT only operated in normal voltage to test all regulations.

EUT Exercise Software

The system was configured for testing in an engineering mode, which was provided by manufacturer

RF test tool: HueApprobationTool

ZigBee & Thread power setting: 8

Support Equipment List and Details

Manufacturer	Description	Model	Serial Number
ZHAOXIN	DC Source	RXN-605D	21R605D08132677
Lenovo	Notebook	Y700P	PF2B7PL5
/	Debug Board	/	/
Narda	Attenuator	10dB	010
Signify (China) Investment Co., Ltd.	Hue connect	44229669594	/

External I/O Cable

Cable Description	Length (m)	From Port	To Port
RF Cable	0.2	Attenuator	EUT
Power Cable	1.2	EUT	DC Source
Data Cable 1	0.15	EUT	Debug Board
Data Cable 2	1.5	Debug Board	Notebook

SUMMARY OF TEST RESULTS

MIC Notice No.88 Appendix No.43 Article 2, Paragraph 1, Item 19	Description of Test	Result
1	Frequency Error	Compliant
2	Occupied Bandwidth	Compliant
3	Transmitter Spurious Emission and Unwanted Emission Intensity	Compliant
4	Antenna Output Power and Output Power Tolerance	Compliant
5	Receiver Spurious Emission and Unwanted Emission Intensity	Compliant
6	Transmission Antenna Gain	Not Applicable (See Note 1)
7	Transmission Radiation Angle Width	Not Applicable (See Note 1)
8	Carrier sense capability	Not Applicable (See Note 3)
9	Frequency Hopping Dwell Time	Not Applicable (See Note 2)
10	Interference prevention function	Compliant
11	Construction Protection Confirmation	Compliant

Note:

1. This test item will not be applied to the transmission antenna which EIRP is less than 12.14dBm.
2. Testing is only required for FHSS system devices;
3. The test only required for bandwidth more than 26MHz and less than 40MHz.

TEST EQUIPMENT LIST

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date	Calibration Authority	Calibration Method
Narda	Attenuator	10dB	10dB-01	2026-03-13	2027-03-12	BACL Cal	c)
Rohde & Schwarz	EMI Test Receiver	FSU26	200103	2026-03-16	2027-03-15	BACL Cal	c)
ZHAOXIN	DC Power Supply	RXN-605D	21R605D08132677	N/A	N/A	N/A	N/A
Fluke	Digital Multimeter	15B+	45401661WS	2026-03-13	2027-03-12	BACL Cal	c)
Rohde & Schwarz	Vector Signal Generator	N5182B	MY53051592	2026-03-16	2027-03-15	BACL Cal	c)
MACOM	Power Combiner	2090-6214-00	96341	2026-03-13	2027-03-12	BACL Cal	c)
Agilent	Power Meter	E4419B	MY41291878	2026-03-13	2027-03-12	BACL Cal	c)

NOTE: Calibration Method

a): Calibration conducted by the National Institute of Information and Communications Technology~ NICT~ or a designated calibration agency under Article 102-18 paragraph (1)

b): Correction conducted pursuant to the provisions of Article 135 or Article 144 of the Measurement Law (Law No. 51 of 1992) ~Japan Calibration Service System ~

c): Calibration conducted in foreign countries, which shall be equivalent to the calibration conducted by the NICT or a designated calibration agency under Article 102-18 paragraph (1)

d): Calibration conducted by using other equipment that listed above from a) to c)

FREQUENCY ERROR

Limit

The Tolerance of frequency shall be $\pm 50\text{ppm}$.

Test Procedure

Set the EUT to the measurement frequency without modulation.


Setting of SA is following as: RB: 1 kHz / VB: 3 kHz / Sweep time: Auto / Sweep Mode: Continuous sweep / Detect mode: Positive peak / Trace mode: Max hold.

Record the peak spot frequency.

If the EUT can't set at un-modulation mode.

Setting of SA is following as: RB: 100 kHz / VB: 300 kHz / Sweep time: Auto / Sweep Mode: Continuous sweep / Detect mode: Positive peak / Trace mode: Max hold.

Record the peak spot frequency, measure the 10dBc center frequency.

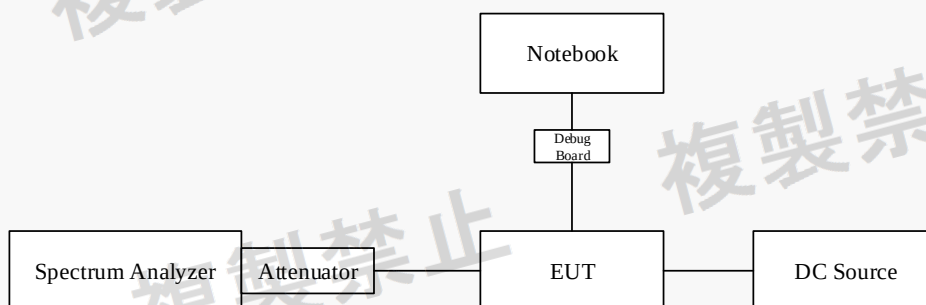

Note : the offset= Attenuator (10dB) +Cable loss (0.5dB) has been added in Spectrum Analyzer

Test Data: See Appendix


OCCUPIED BANDWIDTH

Limit

Occupied bandwidth: $FH \leq 83.5 \text{ MHz}$; $DS \leq 26 \text{ MHz}$; $26\text{MHz} < \text{OFDM} \leq 40 \text{ MHz}$
Others $\leq 26 \text{ MHz}$

Test Procedure

1. Setting of SA is following as: RB: 30 kHz / VB: 30 kHz / Sweep time: Auto / Sweep Mode: Continuous sweep / Detect mode: Positive peak / Trace mode: Max hold
2. EUT have transmitted the maximum modulation signal and fixed channelize. SA set to 99% of occupied bandwidth to measure occupied bandwidth.

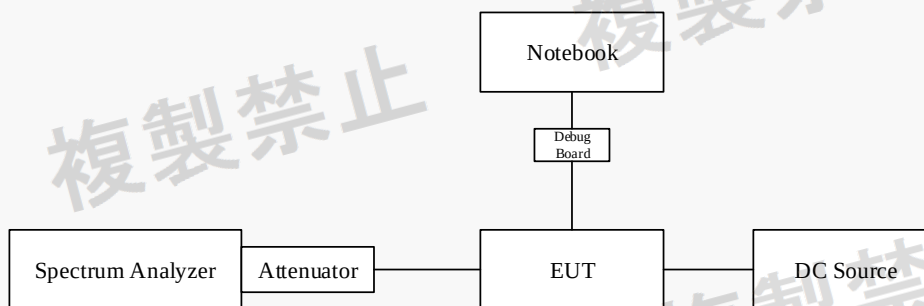

Note : the offset= Attenuator (10dB) +Cable loss (0.5dB) has been added in Spectrum Analyzer

Test Data: See Appendix

TRANSMITTER SPURIOUS EMISSION STRENGTH AND UNWANTED EMISSION INTENSITY

Limit


$30\text{MHz} \leq f \leq 1\text{GHz}: \leq 2.5\mu\text{W/MHz}$

$1\text{GHz} < f < 2387\text{ MHz}; 2496.5\text{MHz} < f \leq 12500\text{MHz}: \leq 2.5\mu\text{W/MHz}$

$2387\text{MHz} \leq f \leq 2400\text{ MHz}; 2483.5\text{MHz} < f \leq 2496.5\text{ MHz}: \leq 25\mu\text{W/MHz}$

Test Procedure

Measurement System Diagram

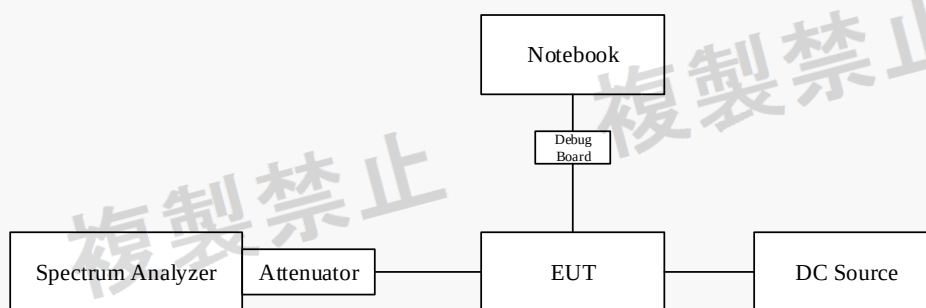

Note : the offset= Attenuator (10dB) +Cable loss (0.5dB) has been added in Spectrum Analyzer

Conditions of Application Equipment (EUT)

The modulation state shall be in continuously transmitting mode.

Spectrum Analyzer Conditions

Setting of SA start 30MHz and stop frequency 1GHz, RB: 100 kHz/VB: 100 kHz, Sweep time: Auto. Sweep mode: continuous sweep .Detect mode: Positive peak/Trace mode: max hold. Then to mark peak reading value + cable loss shall be less than 0.25 μ W.

Setting of SA start 1GHz and stop frequency 2387MHz, RB: 1MHz/VB: 1MHz, Sweep time: Auto. Sweep mode: continuous sweep .Detect mode: Positive peak/Trace mode: max hold. Then to mark peak reading value + cable loss shall be less than 2.5 μ W.

Setting of SA start 2387MHz and stop frequency 2400MHz, RB: 1MHz/VB: 1MHz, Sweep time: Auto. Sweep mode: continuous sweep .Detect mode: Positive peak/Trace mode: max hold. Then to mark peak reading value + cable loss shall be less than 25 μ W.

Setting of SA start 2483.5MHz and stop frequency 2496.5MHz, RB: 1MHz/VB: 1MHz, Sweep time: Auto. Sweep mode: continuous sweep .Detect mode: Positive peak/Trace mode: max hold. Then to mark peak reading value + cable loss shall be less than 25 μ W.

Setting of SA start 2496.5MHz and stop frequency 12500MHz, RB: 1MHz/VB: 1MHz, Sweep time: Auto. Sweep mode: continuous sweep .Detect mode: Positive peak/Trace mode: max hold. Then to mark peak reading value + cable loss shall be less than 2.5 μ W.

If above test over the limit, the below test procedure should be used:

Step 1:

Center the frequency which was want to investigate, search the peak frequency.

Step 2:

Center frequency: Searched Frequency

Span: 0Hz

RBW: 100kHz (Below 1GHz) / 1MHz(Above 1GHz), VBW: Same as RBW.

Sweep time: Auto (Minimum time to ensure measurement accuracy. *In case of burst wave, one burst shall be included per data point) Data points: 400 points or more. Sweep mode: Single Sweep.

Detection Mode: Sample

Test Data: See Appendix

ANTENNA OUTPUT POWER AND ANTENNA POWER TOLERANCE

Limit

- $\leq 3 \text{ mW/MHz}$ (FHSS from 2402-2480 MHz)
- $\leq 10 \text{ mW/MHz}$ (OFDM, DSSS from 2400-2483.5 MHz)
- $\leq 10 \text{ mW}$ (other from 2400-2483.5 MHz)

The Output Power Tolerance must be within +20%.

E.i.r.p:

$\leq 12.14\text{dBm}$


Test Procedure

Step1; Measure the total power by Power Meter (with Average Sensor).

Step2; If it's the burst wave, please measure the burst ratio. Then add the duty cycle in power meter.

Test Setup Block diagram

Power:

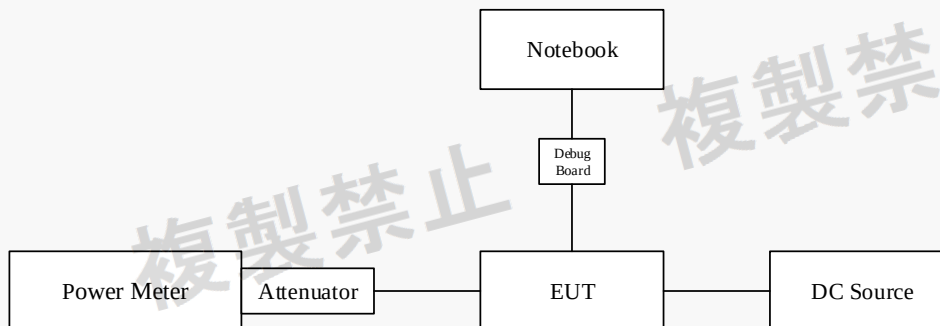

Note : the offset= Attenuator (10dB) +Cable loss (0.5dB) has been added in Power Meter

Test Data: See Appendix

RECEIVER SPURIOUS EMISSION AND UNWANTED EMISSION INTENSITY


Limit

$\leq 4 \text{ nW}$ ($30 \text{ MHz} \leq f \leq 1000 \text{ MHz}$)

$\leq 20 \text{ nW}$ ($1 \text{ GHz} \leq f \leq 12.5 \text{ GHz}$)

Test Procedure

Measurement System Diagram

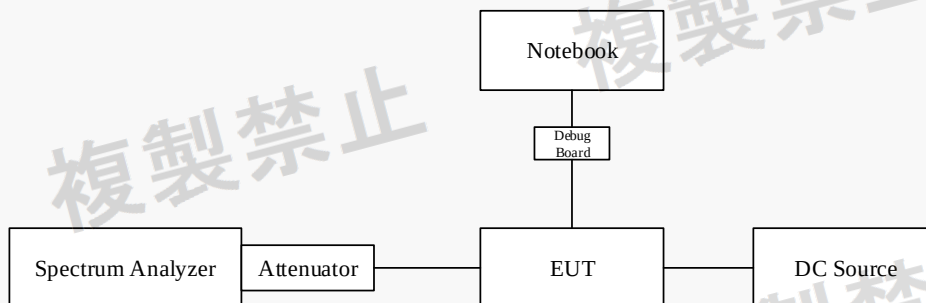

Note: the offset=Attenuator (10dB) + Cable loss (0.5dB) has been added in Spectrum Analyzer

Conditions of Application Equipment (EUT)

The modulation state shall be “continuous receiving mode”.

Spectrum Analyzer Conditions

Start Frequency: Start Frequency of frequency range to measure (30 MHz or 1 GHz)

Stop Frequency: Stop Frequency of frequency range to measure (1 GHz or 12.5 GHz)

Span: AUTO (Measurement Range)

RBW: 100 kHz, VBW: 100 kHz for Frequency < 1 GHz

RBW: 1 MHz, VBW: 1 MHz for Frequency > 1 GHz

Sweep time: AUTO or more

Sweep mode: Auto Sweep

Detection: Positive Peak

Reference Level: Enough level for maximum dynamic range

Test Data: See Appendix

INTERFERENCE PREVENTION FUNCTION

Requirement

The EUT shall have the interference prevention capability to transmit or to receive the identification automatically, so that sender and receiver shall exclude other equipment.


Test Procedure

In the case that the EUT has the function of automatically transmitting the identification code:

1. Transmit the predetermined identification codes from EUT
2. Check the transmitted identification codes with the demodulator.

In the case of receiving the identification codes:

1. Transmit the predetermined identification codes from the counterpart.
2. Check if communication is normal
3. Transmit the signal other than predetermined ID codes from the counterpart.
4. Check if the EUT stops the transmission, or if it displays that identification codes are different from the predetermined ones.

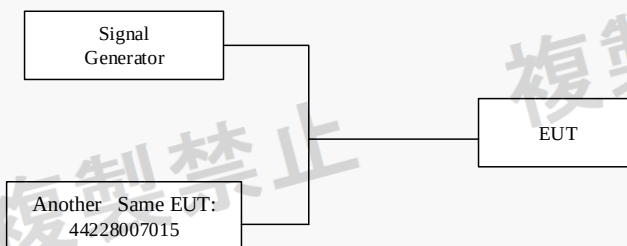

Environmental Conditions & Test Information:

Test Date:	2026-04-08
Temperature:	22.5 °C
Relative Humidity:	51 %
ATM Pressure:	101.6 kPa
Test Result:	Pass
Test Engineer:	Neil Zhou

Test Data:

Item	Result	Requirement	Verdict
Methodology to transmit ID Code:	Automatically	Automatically	Compliant
Methodology to receive ID Code:	Automatically	Automatically	Compliant
Identification Codes (ID Codes) of EUT:	20:A7:16:FF:FE:B3:2E:EE	/	/
Bits of ID Codes:	64 bits	48 bits or more	Compliant

Test Result: Compliant.

CONSTRUCTION PROTECTION CONFIRMATION

Limit

The high-frequency section and modulation section of the radio equipment except for the antenna system shall not be capable of being opened easily.

Confirmation Method

The EUT has shielding cover the high-frequency section except for the antenna system, the shielding can't be opened easily. Please refer to EUT Photo.

APPENDIX-TEST DATA

FREQUENCY ERROR

Environmental Conditions & Test Information:

Test Date:	2026-05-27
Temperature:	24.7 °C
Relative Humidity:	59 %
ATM Pressure:	101.4 kPa
Test Result:	Pass
Test Engineer:	Neil Zhou

Test Result: Compliant

Test Mode: Transmitting

Frequency (MHz)	Voltage (V _{DC})	Measure Frequency (MHz)	Frequency Tolerance (ppm)	Limit (ppm)
2405	24	2404.98980	-4.24	± 50
2440		2439.98950	-4.30	
2480		2479.98920	-4.35	


Note:

Frequency Tolerance = (Measure Frequency - Frequency)/Frequency*10⁶


Please refer to the plots for normal voltage test.

Please refer to the following plots for normal voltage:


Frequency: 2405MHz

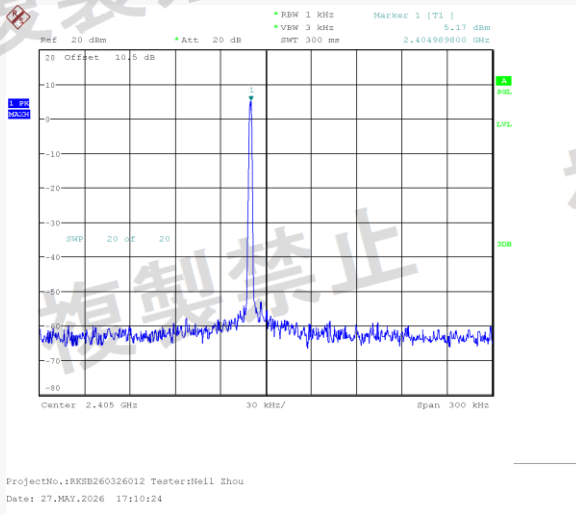

Frequency: 2440MHz

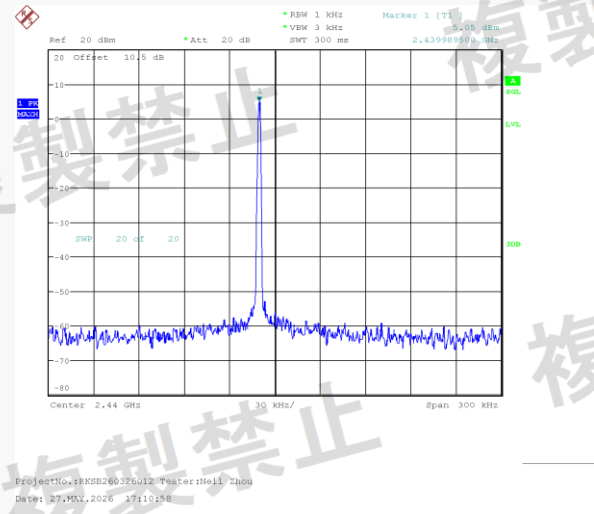

Frequency: 2480MHz

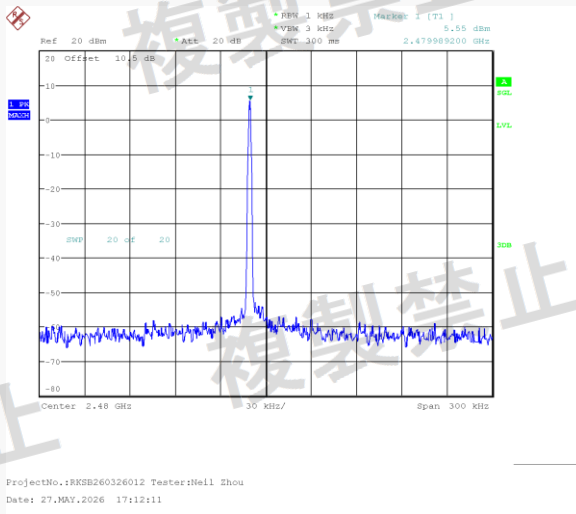

OCCUPIED BANDWIDTH**Environmental Conditions & Test Information:**

Test Date:	2026-04-08
Temperature:	22.5 °C
Relative Humidity:	51 %
ATM Pressure:	101.6 kPa
Test Result:	Pass
Test Engineer:	Neil Zhou

Test Result: Compliant*Test Mode: Transmitting*

Frequency (MHz)	Low Channel	Middle Channel	High Channel	Limit
Occupied Bandwidth (MHz)	2.235	2.240	2.245	≤26MHz


Please refer to the following plots for normal voltage:

Occupied Bandwidth:


Low Channel



Middle Channel

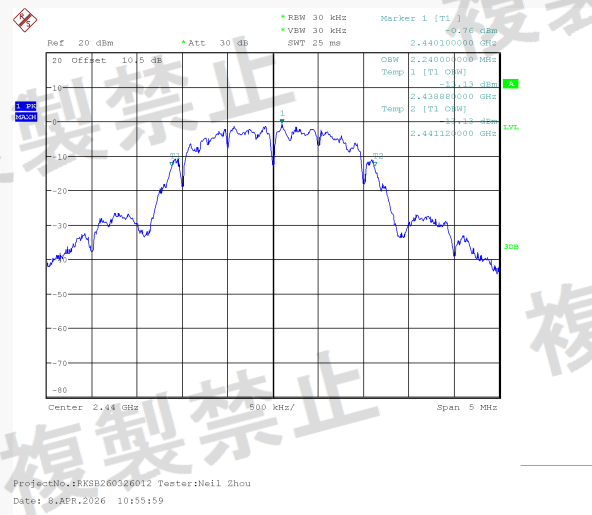

High Channel

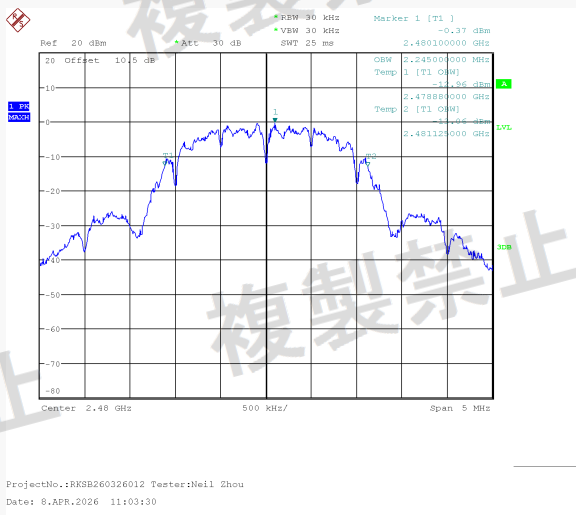

TRANSMITTER SPURIOUS EMISSION STRENGTH AND UNWANTED EMISSION INTENSITY

Environmental Conditions & Test Information:

Test Date:	2026-04-08
Temperature:	22.5 °C
Relative Humidity:	51 %
ATM Pressure:	101.6 kPa
Test Result:	Pass
Test Engineer:	Neil Zhou


Test Result: Compliant

Test Mode: Transmitting

Channel	Test Band (RBW)	Frequency Range		Max.Emission Located(MHz)	Result (dBm/RBW)	Result (μW/RBW)	Limit (μW/RBW)	Verdict
		Start(MHz)	Stop(MHz)					
Low	Band I (100kHz)	30	1000	802.12	-42.51	0.056	0.25	Pass
	Band II (1MHz)	1000	2387	2122.7765	-37.95	0.160	2.50	Pass
	Band III (1MHz)	2387	2400	2397.0685	-36.04	0.249	25	Pass
	Band IV (1MHz)	2483.5	2496.5	2495.1285	-36.36	0.231	25	Pass
	Band V (1MHz)	2496.5	12500	3506.8535	-36.38	0.230	2.50	Pass
Middle	Band I (100kHz)	30	1000	386.96	-42.93	0.051	0.25	Pass
	Band II (1MHz)	1000	2387	2331.52	-38.15	0.153	2.50	Pass
	Band III (1MHz)	2387	2400	2398.401	-37.19	0.191	25	Pass
	Band IV (1MHz)	2483.5	2496.5	2495.5705	-36.46	0.226	25	Pass
	Band V (1MHz)	2496.5	12500	2581.52975	-36.71	0.213	2.50	Pass
High	Band I (100kHz)	30	1000	56.19	-42.32	0.059	0.25	Pass
	Band II (1MHz)	1000	2387	2348.8575	-38.25	0.150	2.50	Pass
	Band III (1MHz)	2387	2400	2390.9195	-37.24	0.189	25	Pass
	Band IV (1MHz)	2483.5	2496.5	2483.5	-29.26	1.186	25	Pass
	Band V (1MHz)	2496.5	12500	9924.09875	-36.60	0.219	2.50	Pass


Please refer to the following plots for normal voltage:

Low Channel 30MHz~1GHz

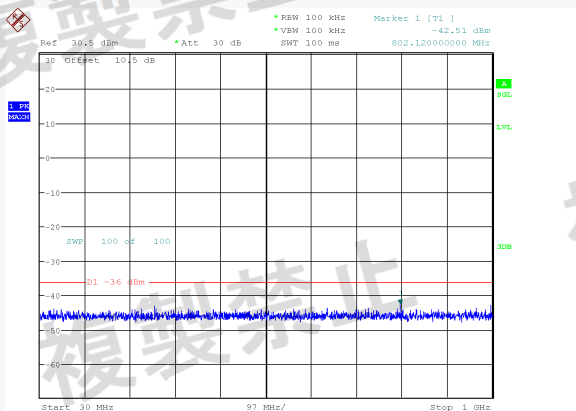


ProjectNo.:RKSB260326012 Tester:Neil Zhou
Date: 8.APR.2026 11:01:46

Low Channel 1GHz~2387MHz

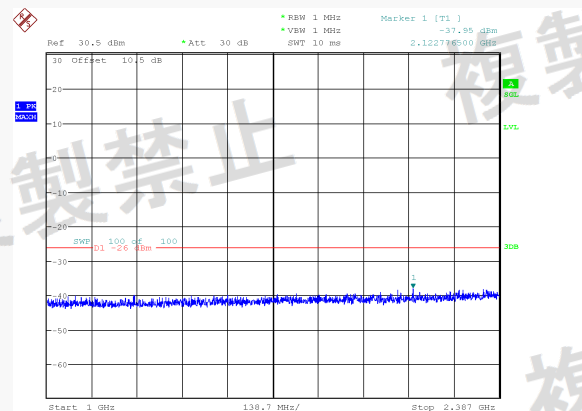


ProjectNo.:RKSB260326012 Tester:Neil Zhou
Date: 8.APR.2026 11:02:00

Low Channel 2387MHz~2400MHz

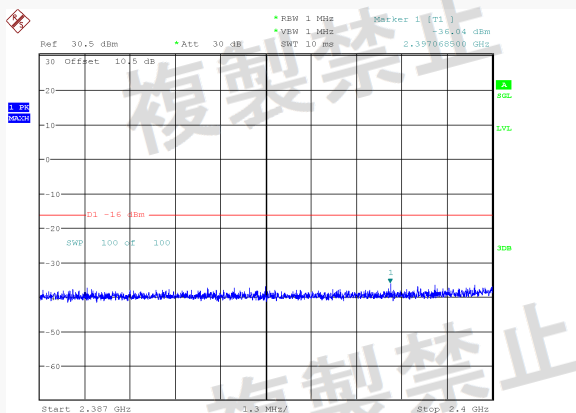


ProjectNo.:RKSB260326012 Tester:Neil Zhou
Date: 8.APR.2026 11:02:11

Low Channel 2483.5MHz~2496.5MHz

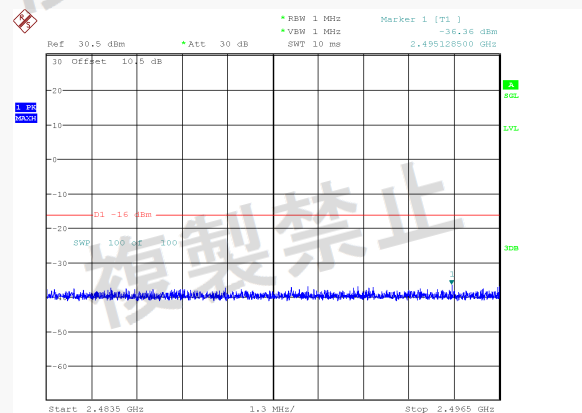


ProjectNo.:RKSB260326012 Tester:Neil Zhou
Date: 8.APR.2026 11:02:13

Low Channel 2496.5MHz~12500MHz

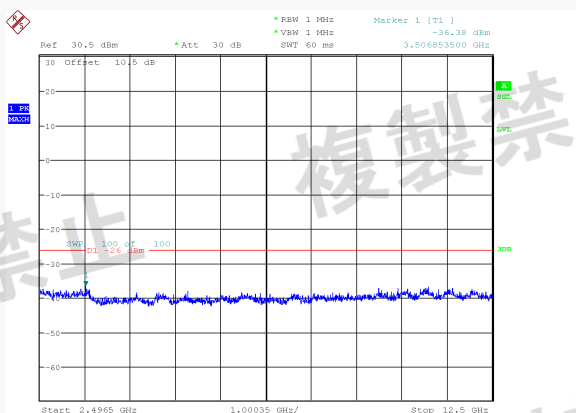


ProjectNo.:RKSB260326012 Tester:Neil Zhou
Date: 8.APR.2026 11:02:52

Middle Channel 30MHz~1GHz

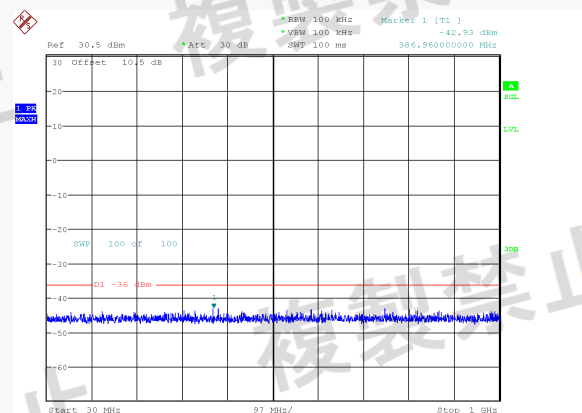


ProjectNo.:RKSB260326012 Tester:Neil Zhou
Date: 8.APR.2026 10:56:21

Middle Channel 1GHz ~2387MHz

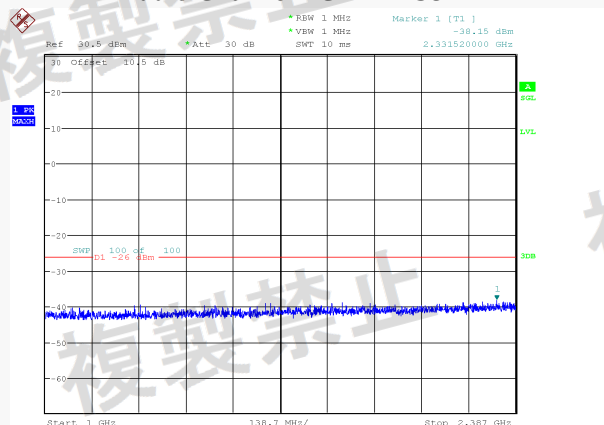


ProjectNo.:RKSB260326012 Tester:Neil Zhou
Date: 8.APR.2026 10:56:35

Middle Channel 2387MHz ~2400MHz

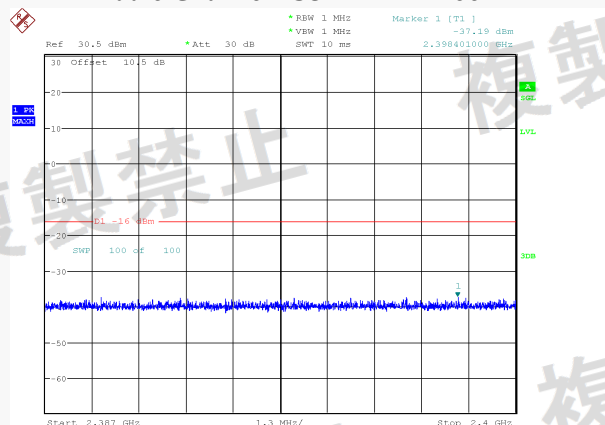


ProjectNo.:RKSB260326012 Tester:Neil Zhou
Date: 8.APR.2026 10:56:46

Middle Channel 2483.5MHz ~2496.5MHz

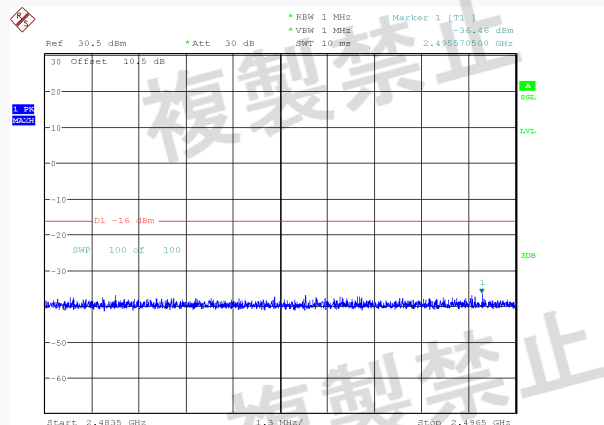


ProjectNo.:RKSB260326012 Tester:Neil Zhou
Date: 8.APR.2026 10:56:58

Middle Channel 2496.5MHz ~12500MHz

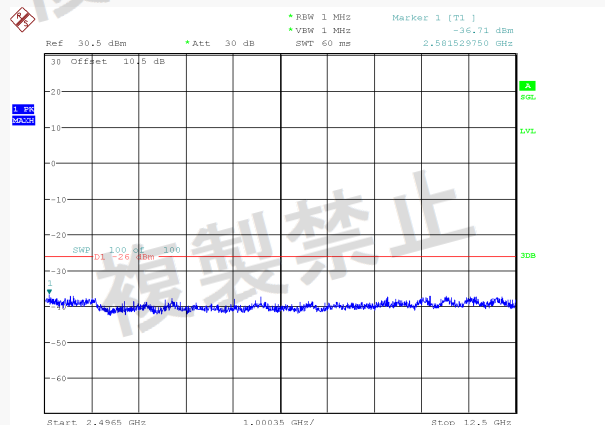


ProjectNo.:RKSB260326012 Tester:Neil Zhou
Date: 8.APR.2026 10:57:27

High Channel 30MHz ~1GHz

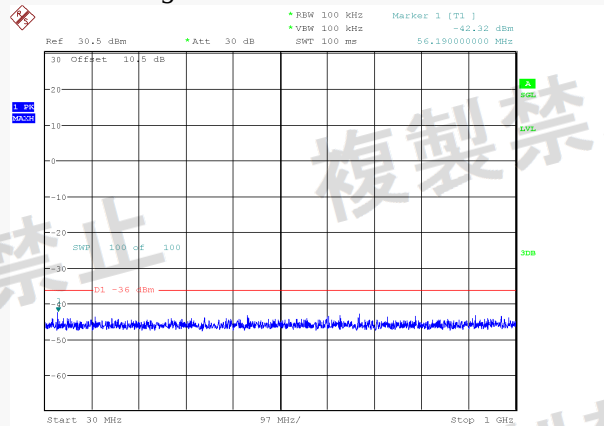


ProjectNo.:RKSB260326012 Tester:Neil Zhou
Date: 8.APR.2026 11:03:48

High Channel 1GHz ~2387MHz

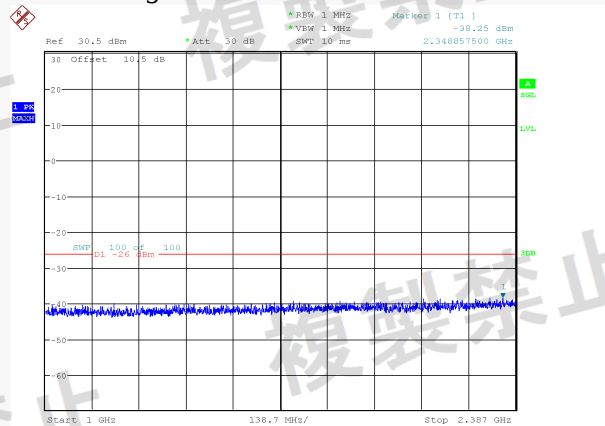


ProjectNo.:RKSB260326012 Tester:Neil Zhou
Date: 8.APR.2026 11:04:02

High Channel 2387MHz ~2400MHz

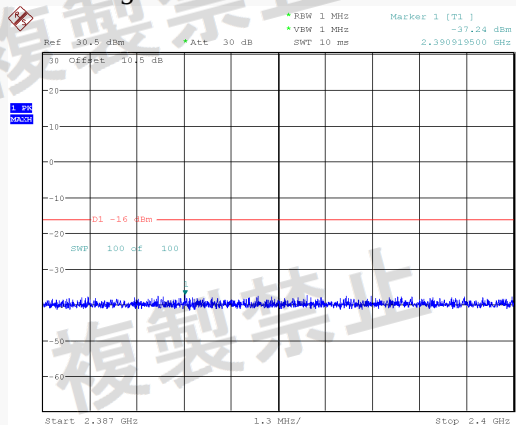


ProjectNo.:RKSB260326012 Tester:Neil Zhou
Date: 8.APR.2026 11:04:14

High Channel 2483.5MHz ~2496.5MHz

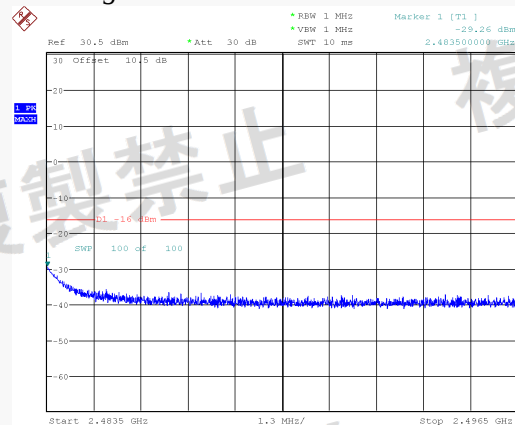

ProjectNo.:RKSB260326012 Tester:Neil Zhou
Date: 8.APR.2026 11:04:26

High Channel 2496.5MHz ~12500MHz

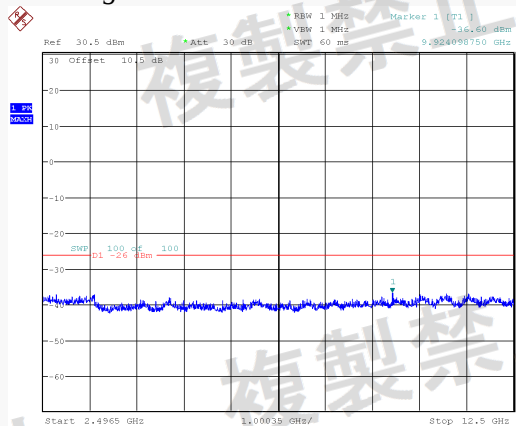

ProjectNo.:RKSB260326012 Tester:Neil Zhou
Date: 8.APR.2026 11:04:55

ANTENNA OUTPUT POWER AND ANTENNA POWER TOLERANCE**Environmental Conditions & Test Information:**

Test Date:	2026-05-22
Temperature:	23.5 °C
Relative Humidity:	55 %
ATM Pressure:	102.3 kPa
Test Result:	Pass
Test Engineer:	Neil Zhou

Test Result: Compliant*Test Mode: Transmitting*

Frequency (MHz)	Low Channel	Middle Channel	High Middle
Antenna Output Power (dBm)	4.71	4.81	4.84
Antenna Output Power (mW)	2.96	3.03	3.05
EIRP (dBm)	6.91	7.01	7.04
Declared Power (mW)	4.00	4.00	4.00
Antenna Output Power Tolerance (%)	-26.00	-24.25	-23.75
Antenna Power Limit	10mW		
EIRP Limit	12.14dBm		
Antenna Tolerance Limit	+20%		
Result	Pass		

Note 1: Antenna Power Error = (Antenna Output Power - Declared Antenna power)/ Declared Antenna power *100%

Note 2: Antenna gain is 2.20 dBi.

Declared Antenna power is 4.0 mW.


RECEIVER SPURIOUS EMISSION AND UNWANTED EMISSION INTENSITY**Environmental Conditions & Test Information:**

Test Date:	2026-04-08
Temperature:	22.5 °C
Relative Humidity:	51 %
ATM Pressure:	101.6 kPa
Test Result:	Pass
Test Engineer:	Neil Zhou

Test Result: Compliant*Test Mode: Receiving*


Channel	Test Band (RBW)	Frequency Range		Max.Emission Located(MHz)	Result (dBm)	Result (nW)	Limit (nW)
		Start(MHz)	Stop(MHz)				
Low	Band I (100kHz)	30	1000	896.7435	-64.08	0.391	4
	Band II (1MHz)	1000	12500	2463.95	-56.34	2.323	20
Middle	Band I (100kHz)	30	1000	992.725	-66.12	0.244	4
	Band II (1MHz)	1000	12500	5204.4	-56.80	2.089	20
High	Band I (100kHz)	30	1000	905.716	-66.28	0.236	4
	Band II (1MHz)	1000	12500	2462.8	-57.00	1.995	20

Low Channel(30MHz~1GHz)

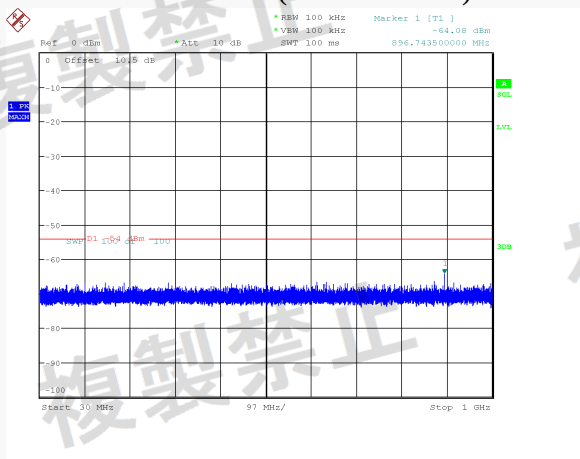


ProjectNo.:RKSB260326012 Tester:Neil Zhou
Date: 8.APR.2026 11:11:19

Low Channel(1GHz~12.5GHz)

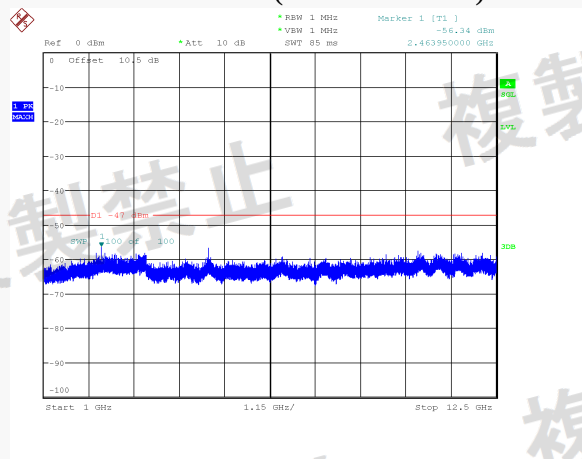


ProjectNo.:RKSB260326012 Tester:Neil Zhou
Date: 8.APR.2026 11:12:00

Middle Channel(30MHz~1GHz)

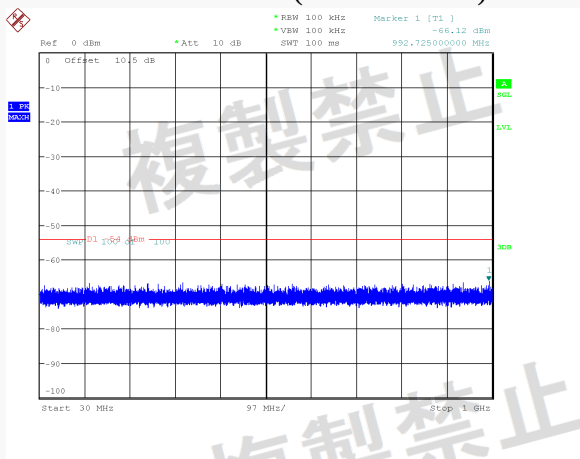


ProjectNo.:RKSB260326012 Tester:Neil Zhou
Date: 8.APR.2026 11:12:32

Middle Channel(1GHz~12.5GHz)

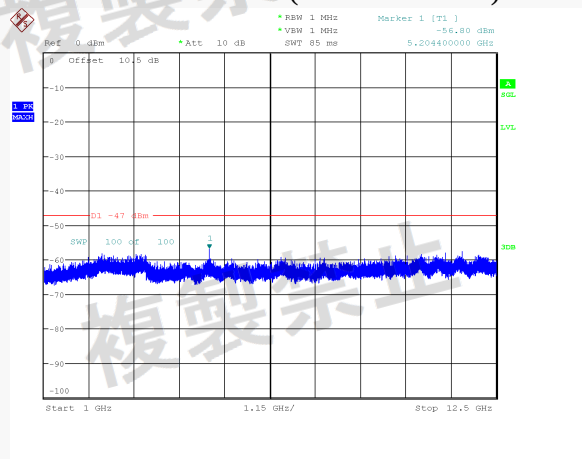


ProjectNo.:RKSB260326012 Tester:Neil Zhou
Date: 8.APR.2026 11:13:12

High Channel(30MHz~1GHz)

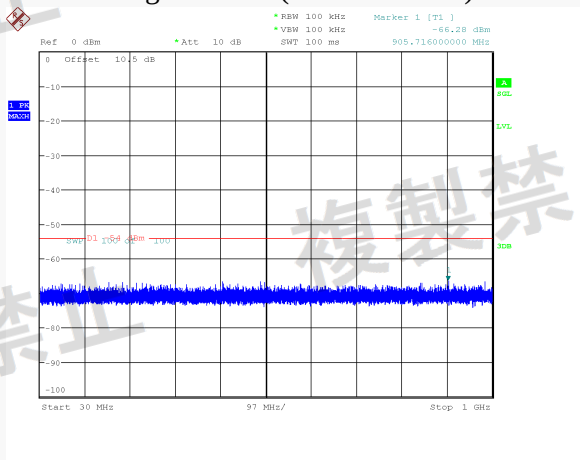

ProjectNo.:RKSB260326012 Tester:Neil Zhou
Date: 8.APR.2026 11:13:44

High Channel(1GHz~12.5GHz)

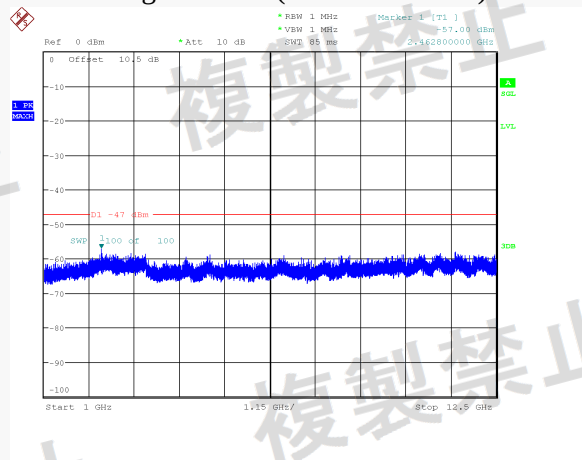

ProjectNo.:RKSB260326012 Tester:Neil Zhou
Date: 8.APR.2026 11:14:25

Declarations

1. The laboratory is not responsible for the authenticity of any information provided by the applicant. Information from the applicant that may affect test results is marked with “★”.
2. The test data was only valid for the test sample(s). This report must not be duplicated or used in part without prior written consent from the laboratory.
3. This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.
4. Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty.
5. The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor $k=2$ with the 95.45% confidence interval.

****END OF REPORT****