


EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-08-05
Factor	BBHA 9120D	Temp. / Humidity	26.8°C/53.7%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE20 at Channel 5320MHz - Beamforming mode	Test Voltage	110V/60Hz

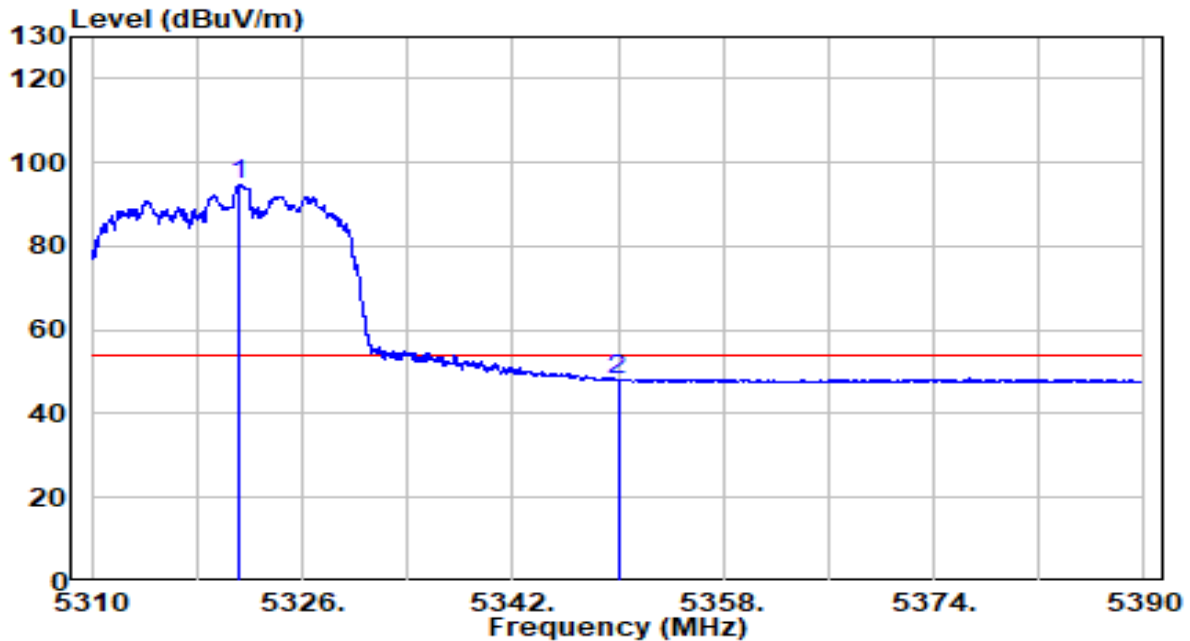


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5321.160	74.43	20.08	94.52	N/A	N/A	Average
2		5350.000	28.18	20.11	48.30	-5.70	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+16dB attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-08-05
Factor	BBHA 9120D	Temp. / Humidity	26.8°C/53.7%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE20 at Channel 5320MHz - Beamforming mode	Test Voltage	110V/60Hz

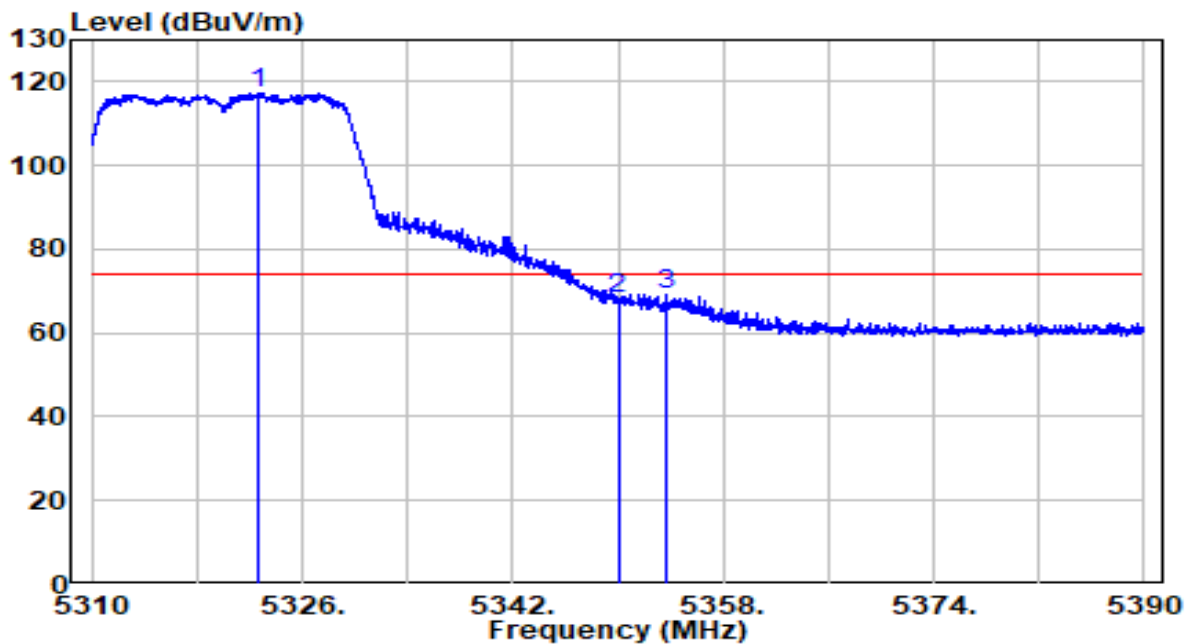


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5322.600	97.19	20.09	117.27	N/A	N/A	Peak
2		5350.000	47.95	20.11	68.06	-5.94	74.00	Peak
3		5353.680	49.20	20.12	69.32	-4.68	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+16dB attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-08-05
Factor	BBHA 9120D	Temp. / Humidity	26.8°C/53.7%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE20 at Channel 5320MHz - Beamforming mode	Test Voltage	110V/60Hz

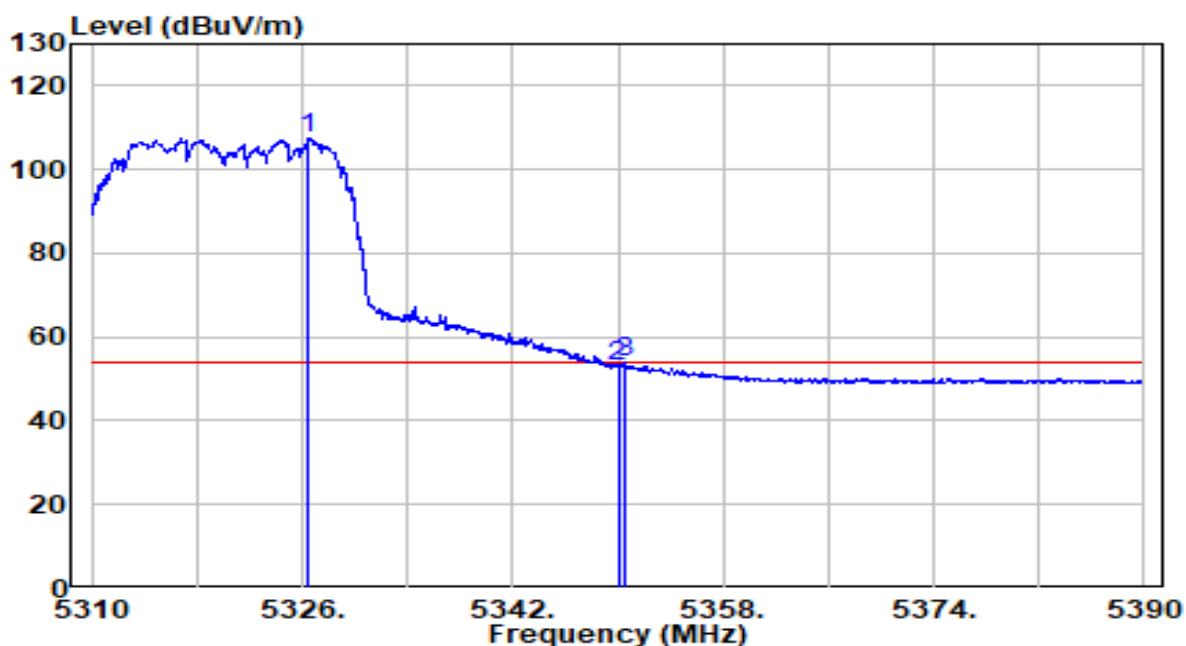


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5326.520	87.23	20.09	107.32	N/A	N/A	Average
2		5350.000	32.76	20.11	52.87	-1.13	54.00	Average
3		5350.560	33.71	20.11	53.82	-0.18	54.00	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+16dB attenuation.
- Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-08-05
Factor	BBHA 9120D	Temp. / Humidity	24.9°C/43.9%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE20 at Channel 5500MHz - Beamforming mode	Test Voltage	110V/60Hz

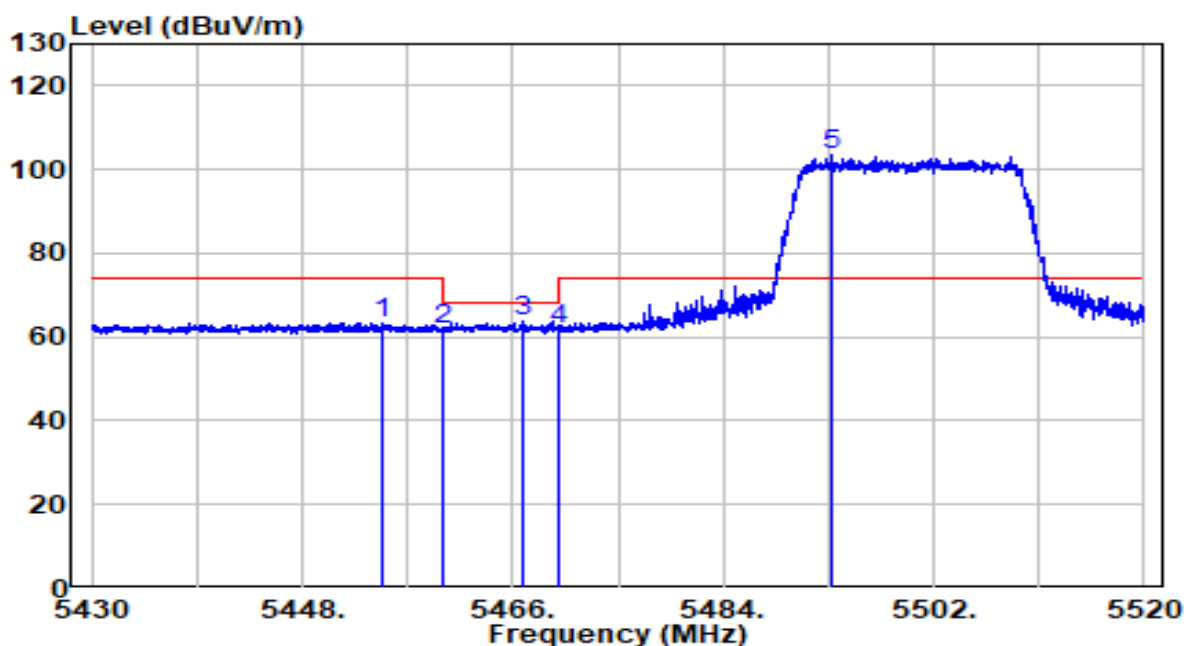


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5454.930	43.13	20.22	63.36	-10.64	74.00	Peak
2	5460.000	41.49	20.23	61.72	-6.48	68.20	Peak
3	5466.900	43.72	20.24	63.96	-4.24	68.20	Peak
4	5470.000	41.35	20.24	61.59	-6.61	68.20	Peak
5	* 5493.315	83.24	20.26	103.50	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+16dB attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-08-05
Factor	BBHA 9120D	Temp. / Humidity	24.9°C/43.9%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE20 at Channel 5500MHz - Beamforming mode	Test Voltage	110V/60Hz

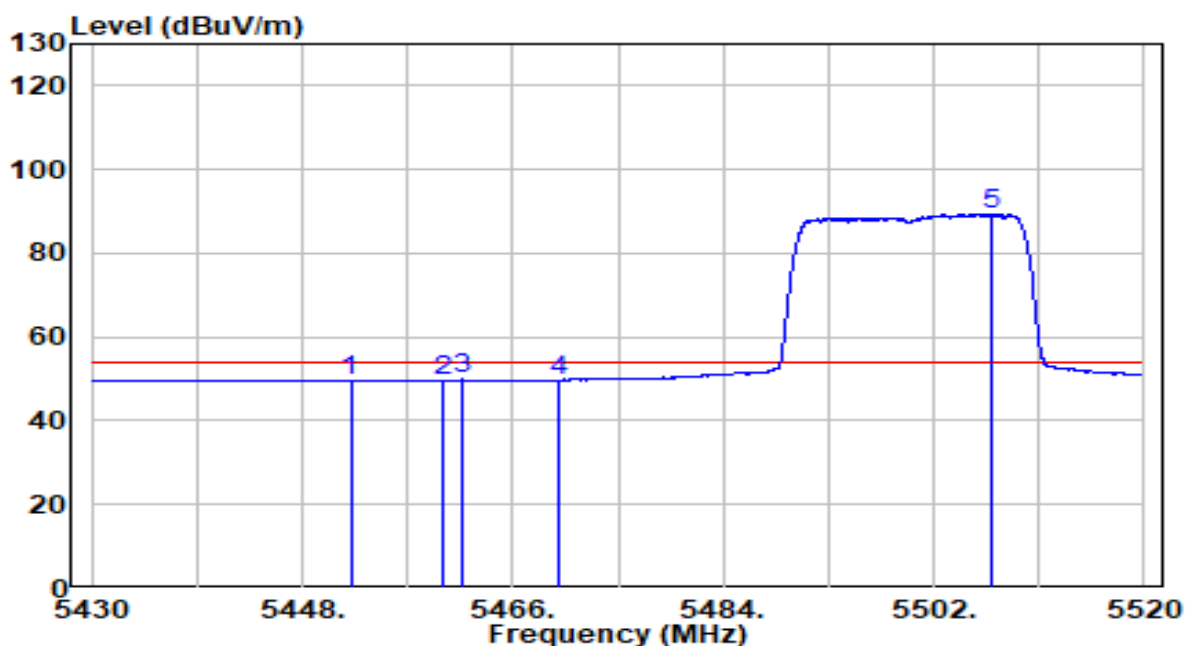


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5452.140	29.56	20.22	49.78	-4.22	54.00	Average
2	5460.000	29.43	20.23	49.66	-4.34	54.00	Average
3	5461.635	29.57	20.23	49.80	-4.20	54.00	Average
4	5470.000	29.47	20.24	49.71	-4.29	54.00	Average
5	* 5507.040	69.12	20.29	89.41	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+16dB attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-08-05
Factor	BBHA 9120D	Temp. / Humidity	24.9°C/43.9%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE20 at Channel 5500MHz - Beamforming mode	Test Voltage	110V/60Hz

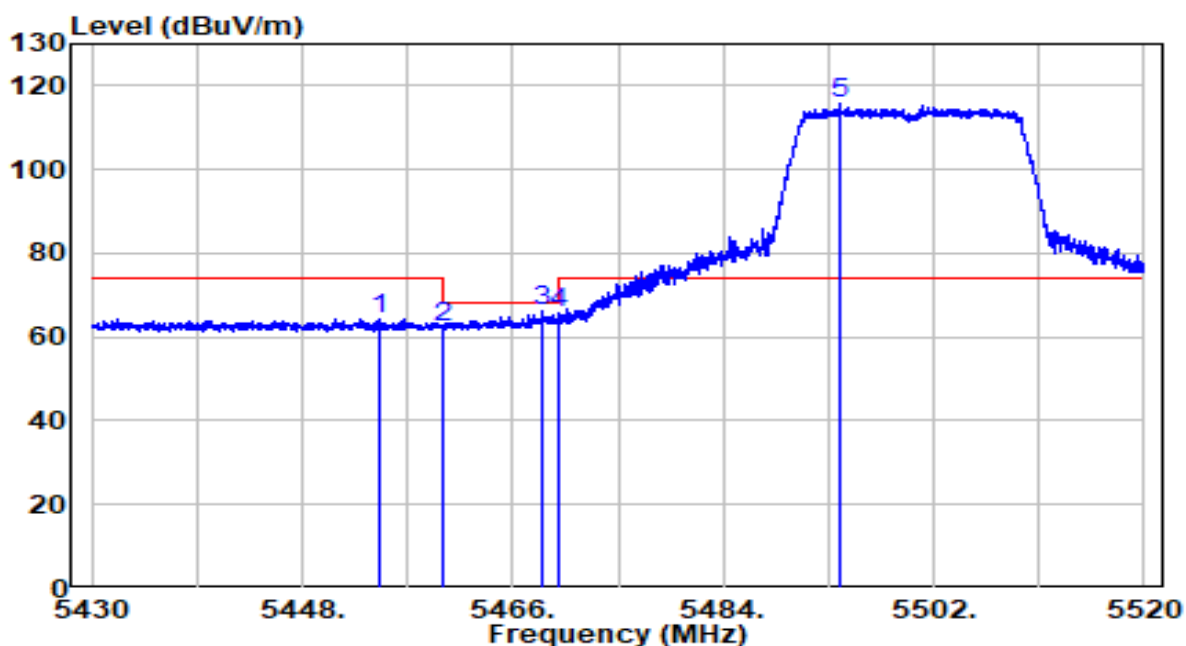


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5454.570	43.90	20.22	64.12	-9.88	74.00	Peak
2	5460.000	41.83	20.23	62.06	-6.14	68.20	Peak
3	5468.475	45.93	20.24	66.17	-2.03	68.20	Peak
4	5470.000	45.40	20.24	65.64	-2.56	68.20	Peak
5	* 5494.035	95.72	20.26	115.99	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+16dB attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-08-05
Factor	BBHA 9120D	Temp. / Humidity	24.9°C/43.9%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE20 at Channel 5500MHz - Beamforming mode	Test Voltage	110V/60Hz

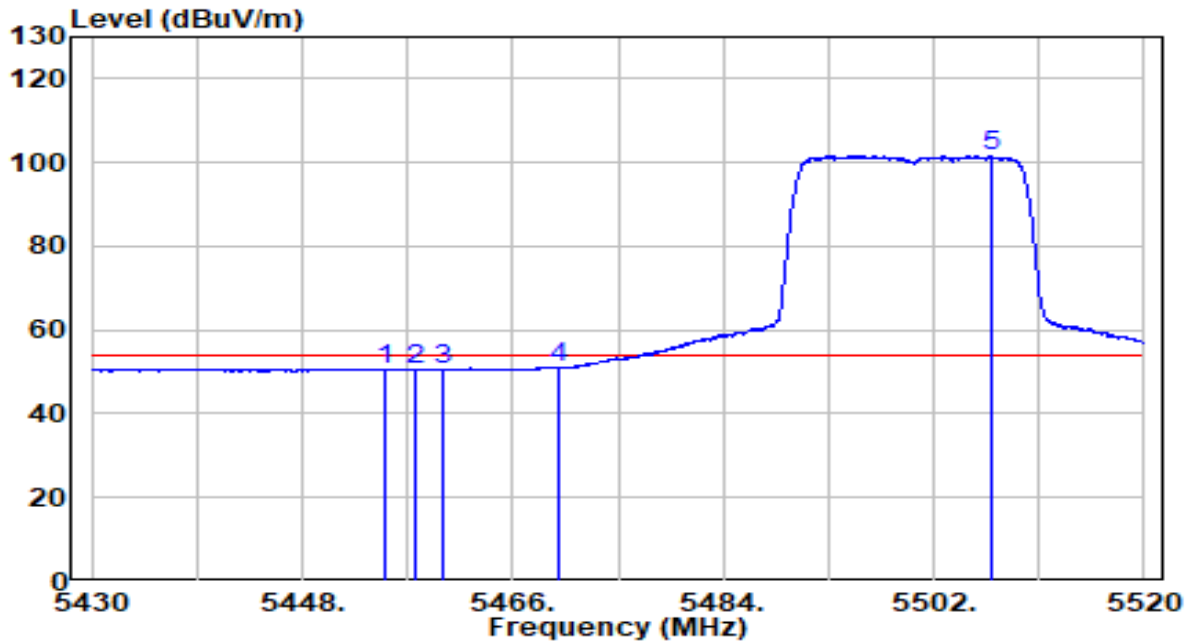


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5455.110	30.26	20.22	50.48	-3.52	54.00	Average
2	5457.675	30.35	20.23	50.58	-3.42	54.00	Average
3	5460.000	30.35	20.23	50.57	-3.43	54.00	Average
4	5470.000	30.89	20.24	51.13	-2.87	54.00	Average
5	* 5506.860	81.21	20.29	101.51	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+16dB attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-08-05
Factor	BBHA 9120D	Temp. / Humidity	24.9°C/43.9%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE20 at Channel 5700MHz - Beamforming mode	Test Voltage	110V/60Hz

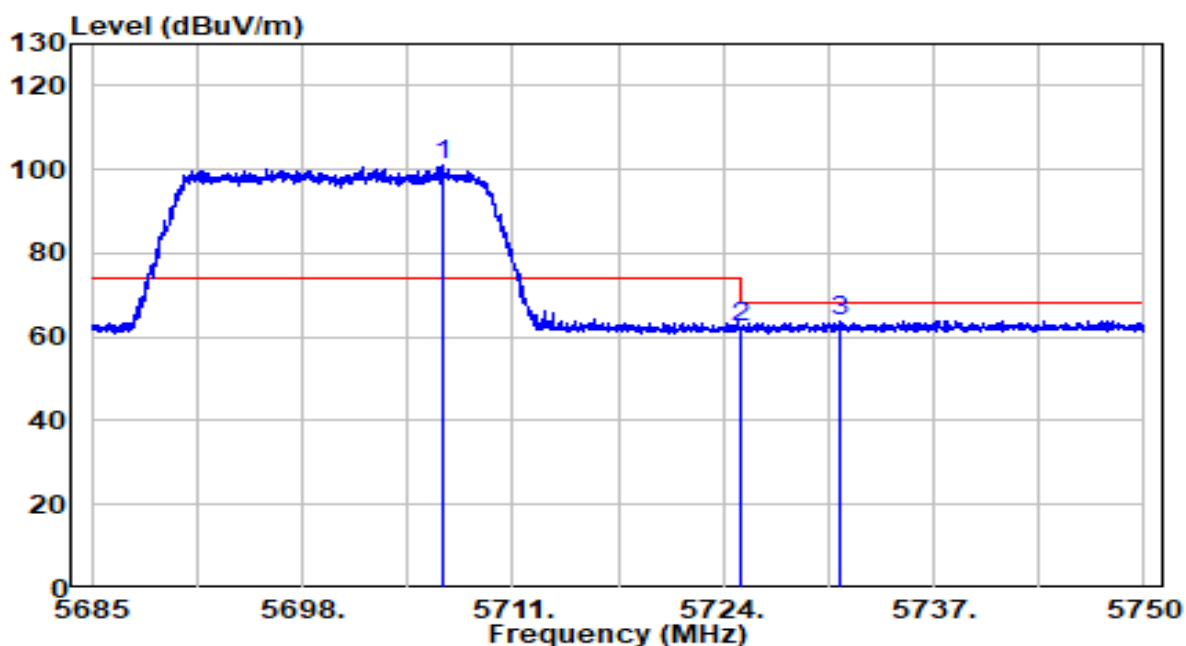


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5706.645	79.92	20.94	100.86	N/A	N/A	Peak
2		5725.000	41.25	21.00	62.25	-5.95	68.20	Peak
3		5731.248	42.61	21.02	63.63	-4.57	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+16dB attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-08-05
Factor	BBHA 9120D	Temp. / Humidity	24.9°C/43.9%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE20 at Channel 5700MHz - Beamforming mode	Test Voltage	110V/60Hz

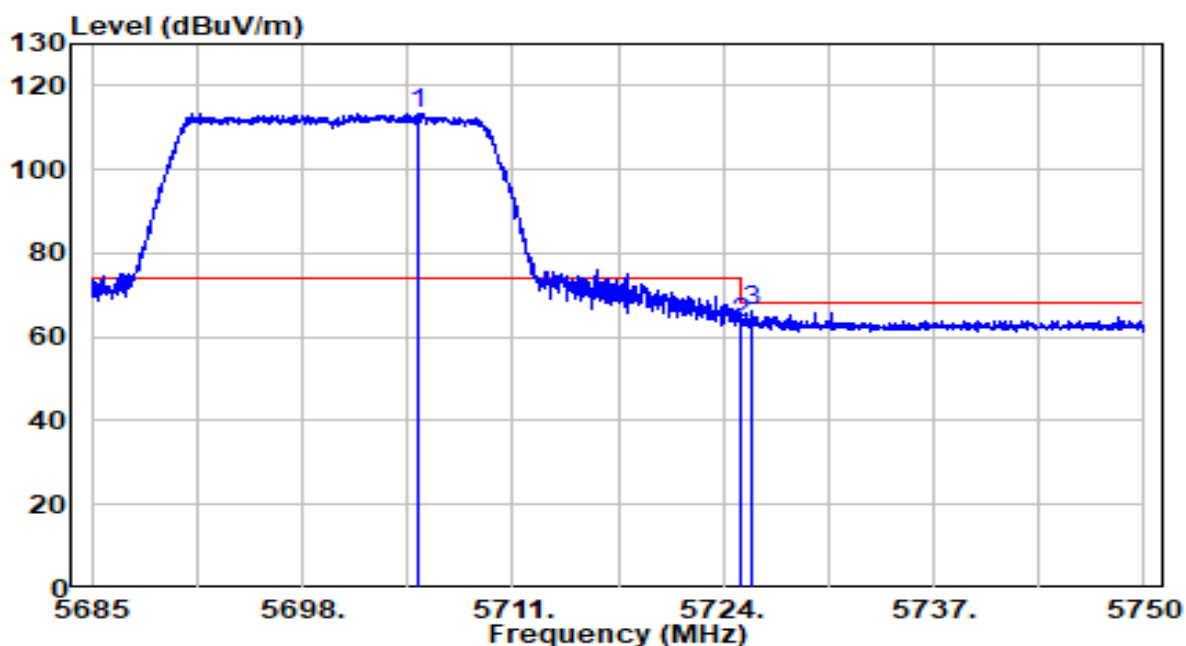


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5705.215	92.58	20.93	113.52	N/A	N/A	Peak
2		5725.000	42.13	21.00	63.12	-5.08	68.20	Peak
3		5725.820	45.36	21.00	66.36	-1.84	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+16dB attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-21
Factor	BBHA 9120D	Temp. / Humidity	26.2°C/49.7%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE20 at Channel 5745MHz - Beamforming Mode	Test Voltage	110V/60Hz

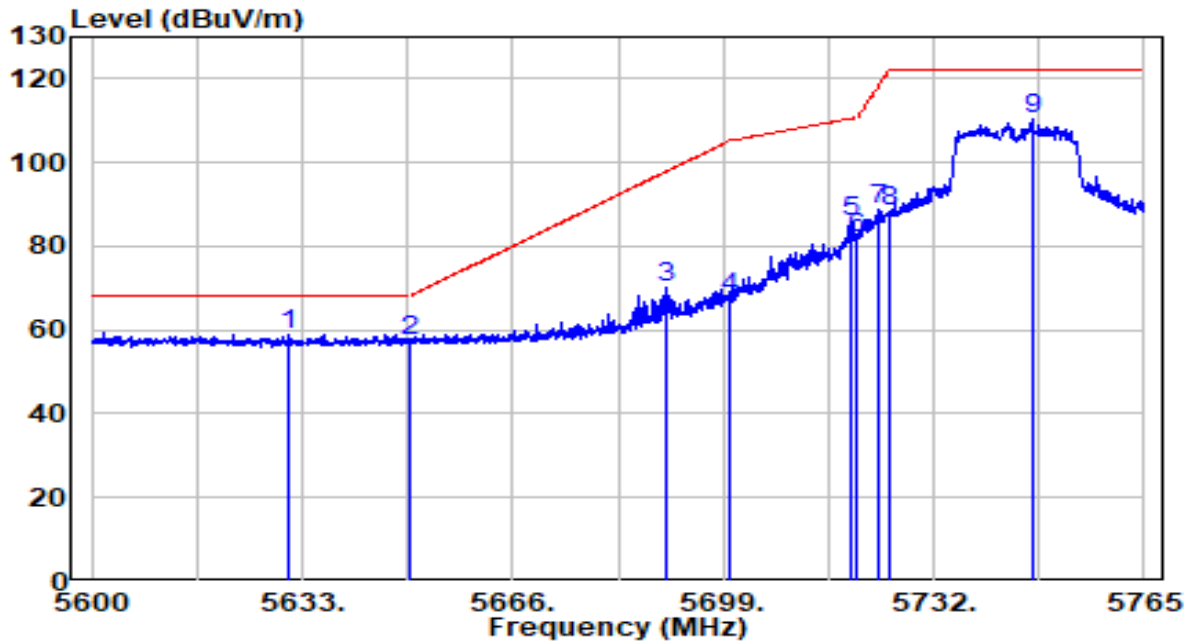


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5631.020	38.27	20.69	58.97	-9.23	68.20	Peak
2		5650.000	36.72	20.76	57.47	-10.73	68.20	Peak
3		5690.007	49.14	20.89	70.02	-27.81	97.83	Peak
4		5700.000	46.96	20.92	67.87	-37.33	105.20	Peak
5		5719.130	65.01	20.98	85.99	-24.57	110.56	Peak
6		5720.000	60.90	20.98	81.88	-28.92	110.80	Peak
7		5723.255	67.72	20.99	88.71	-29.51	118.22	Peak
8		5725.000	67.19	21.00	88.19	-34.01	122.20	Peak
9		5747.592	89.10	21.07	110.17	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+16dB attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-21
Factor	BBHA 9120D	Temp. / Humidity	26.2°C/49.7%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE20 at Channel 5745MHz - Beamforming Mode	Test Voltage	110V/60Hz

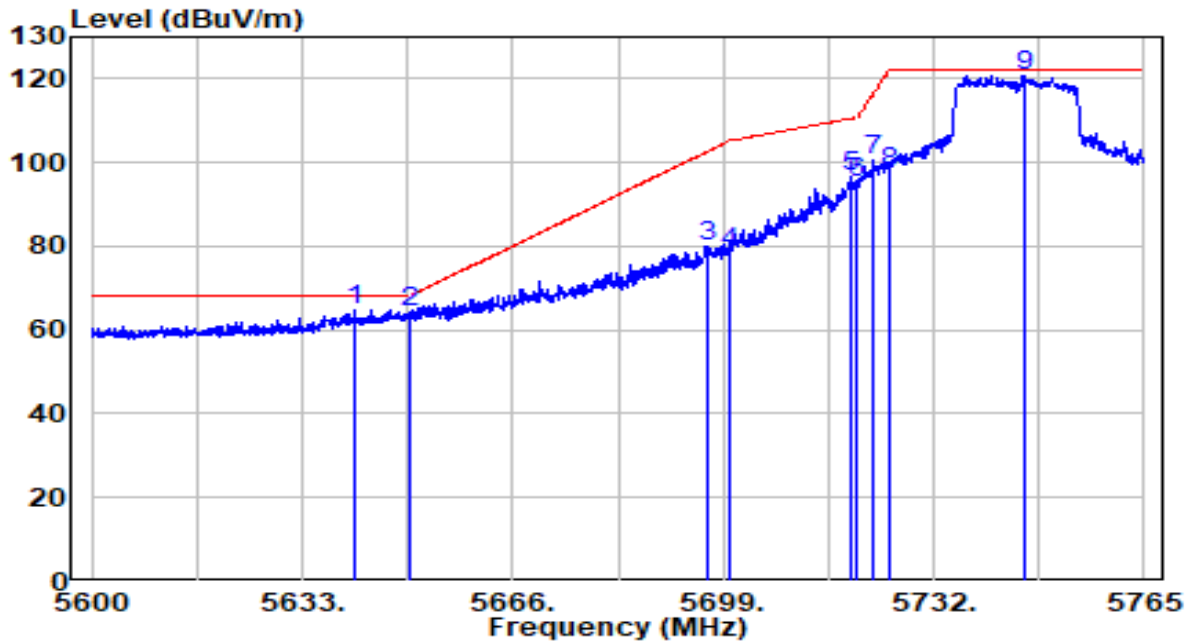


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5641.333	44.16	20.73	64.89	-3.31	68.20	Peak
2	5649.995	43.46	20.76	64.21	-3.99	68.20	Peak
3	5696.525	58.83	20.91	79.73	-22.91	102.64	Peak
4	5700.000	57.68	20.92	78.60	-26.60	105.20	Peak
5	5718.965	75.59	20.98	96.57	-13.94	110.51	Peak
6	5720.000	73.99	20.98	94.98	-15.82	110.80	Peak
7	5722.678	79.39	20.99	100.38	-16.52	116.91	Peak
8	5725.000	76.42	21.00	97.42	-24.78	122.20	Peak
9 *	5746.107	99.56	21.07	120.63	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+16dB attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-21
Factor	BBHA 9120D	Temp. / Humidity	26.2°C/49.7%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE20 at Channel 5825MHz - Beamforming Mode	Test Voltage	110V/60Hz

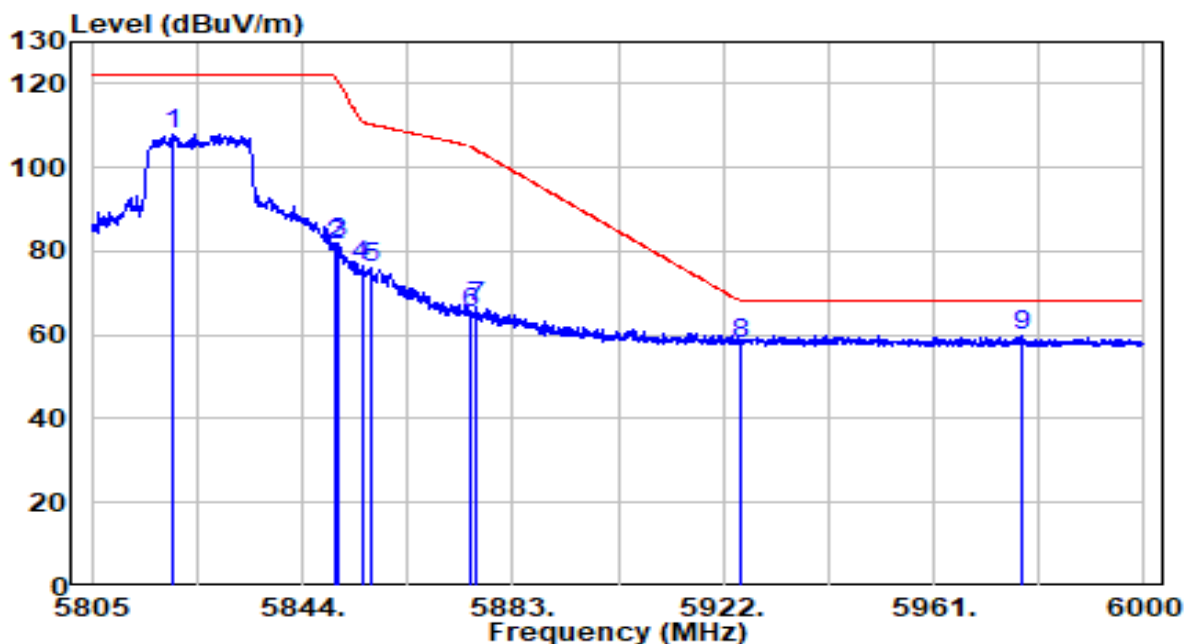


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5820.112	86.73	21.31	108.03	N/A	N/A	Peak
2	5850.000	60.09	21.40	81.49	-40.71	122.20	Peak
3	5850.435	60.61	21.41	82.02	-39.19	121.21	Peak
4	5855.000	54.93	21.42	76.35	-34.45	110.80	Peak
5	5856.772	54.68	21.43	76.10	-34.20	110.30	Peak
6	5875.000	43.77	21.49	65.26	-39.94	105.20	Peak
7	5876.370	45.36	21.49	66.85	-37.33	104.18	Peak
8	5925.000	36.22	21.65	57.86	-10.34	68.20	Peak
9 *	5977.575	38.23	21.82	60.04	-8.16	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+16dB attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

4.The emission levels of other frequencies are very lower than the limit and not show in test report

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-21
Factor	BBHA 9120D	Temp. / Humidity	26.2°C/49.7%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE20 at Channel 5825MHz - Beamforming Mode	Test Voltage	110V/60Hz

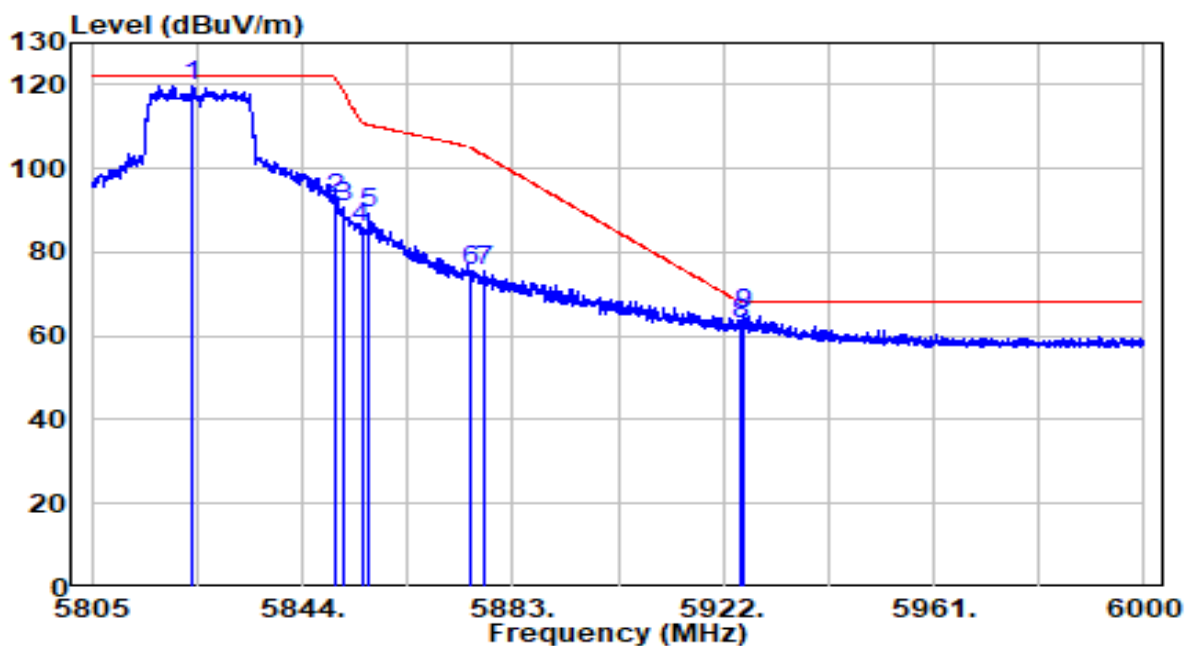


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5823.817	98.60	21.32	119.92	N/A	N/A	Peak
2		5850.000	71.15	21.40	92.55	-29.65	122.20	Peak
3		5851.605	69.37	21.41	90.78	-27.76	118.54	Peak
4		5855.000	64.41	21.42	85.83	-24.97	110.80	Peak
5		5856.188	67.71	21.42	89.13	-21.34	110.47	Peak
6		5875.000	53.95	21.49	75.44	-29.76	105.20	Peak
7		5877.638	54.22	21.49	75.72	-27.52	103.24	Peak
8		5925.000	41.36	21.65	63.01	-5.19	68.20	Peak
9		5925.705	43.56	21.65	65.21	-2.99	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+16dB attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-21
Factor	BBHA 9120D	Temp. / Humidity	26.8°C/53.7%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE40 at Channel 5190MHz - Beamforming Mode	Test Voltage	110V/60Hz

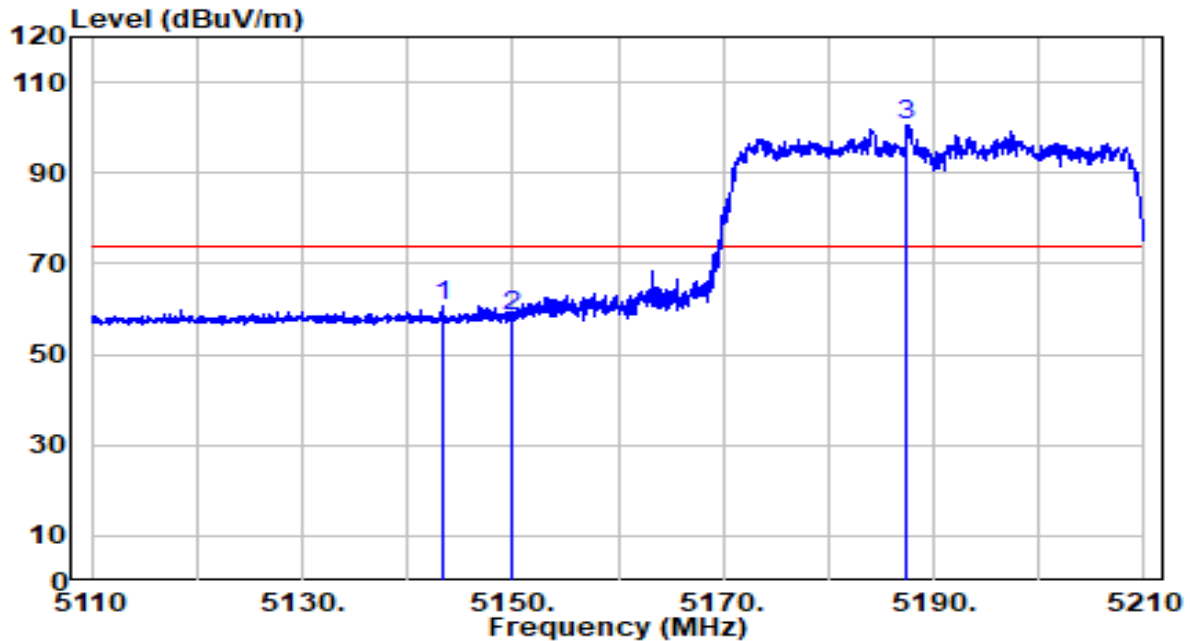


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5143.250	40.96	19.90	60.86	-13.14	74.00	Peak
2	5150.000	38.59	19.91	58.50	-15.50	74.00	Peak
3	* 5187.500	80.59	19.95	100.53	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+16dB attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-21
Factor	BBHA 9120D	Temp. / Humidity	26.8°C/53.7%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE40 at Channel 5190MHz - Beamforming Mode	Test Voltage	110V/60Hz

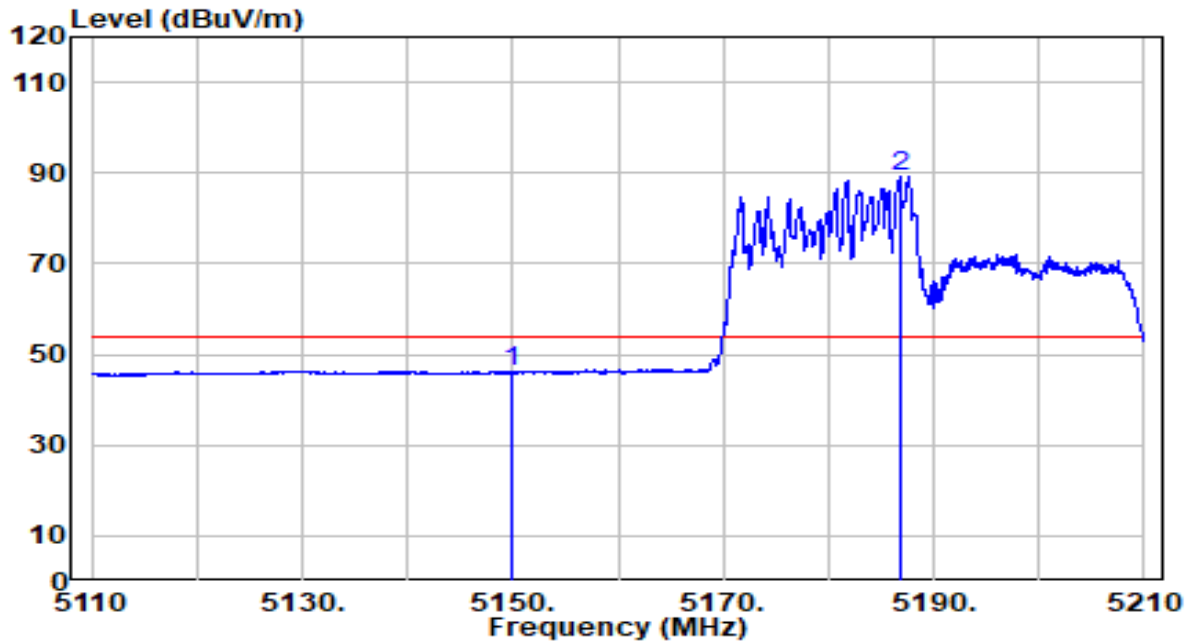


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5150.000	26.18	19.91	46.08	-7.92	54.00	Average
2	* 5186.900	69.19	19.94	89.13	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+16dB attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-21
Factor	BBHA 9120D	Temp. / Humidity	26.8°C/53.7%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE40 at Channel 5190MHz - Beamforming Mode	Test Voltage	110V/60Hz

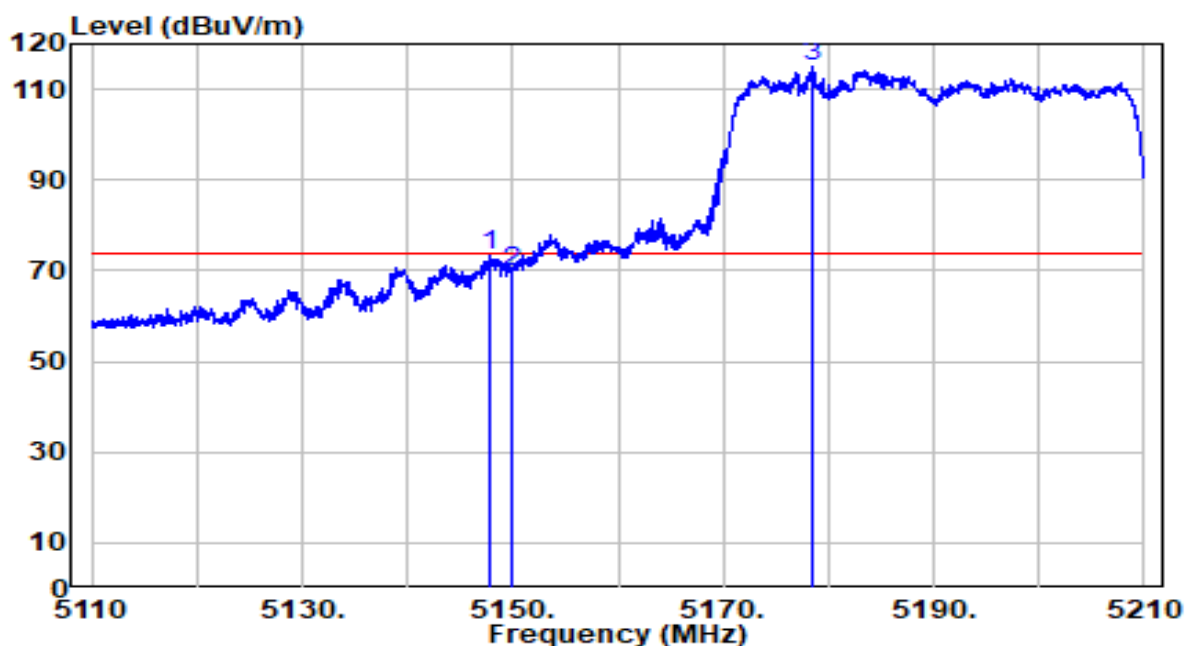


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5147.800	53.27	19.90	73.18	-0.82	74.00	Peak
2	5150.000	49.65	19.91	69.56	-4.44	74.00	Peak
3	* 5178.500	95.02	19.94	114.96	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+16dB attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-21
Factor	BBHA 9120D	Temp. / Humidity	26.8°C/53.7%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE40 at Channel 5190MHz - Beamforming Mode	Test Voltage	110V/60Hz

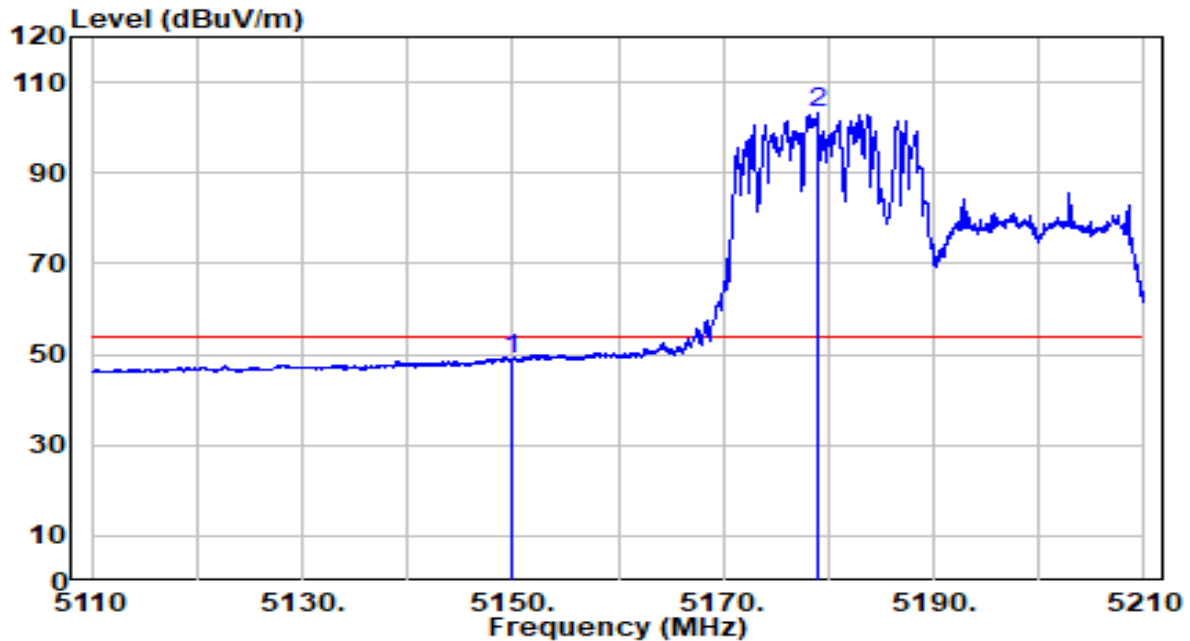


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5150.000	29.00	19.91	48.90	-5.10	54.00	Average
2	* 5179.050	83.13	19.94	103.06	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+16dB attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-08-05
Factor	BBHA 9120D	Temp. / Humidity	24.9°C/46.3%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE40 at channel 5230MHz - Beamforming Mode	Test Voltage	120V/50Hz

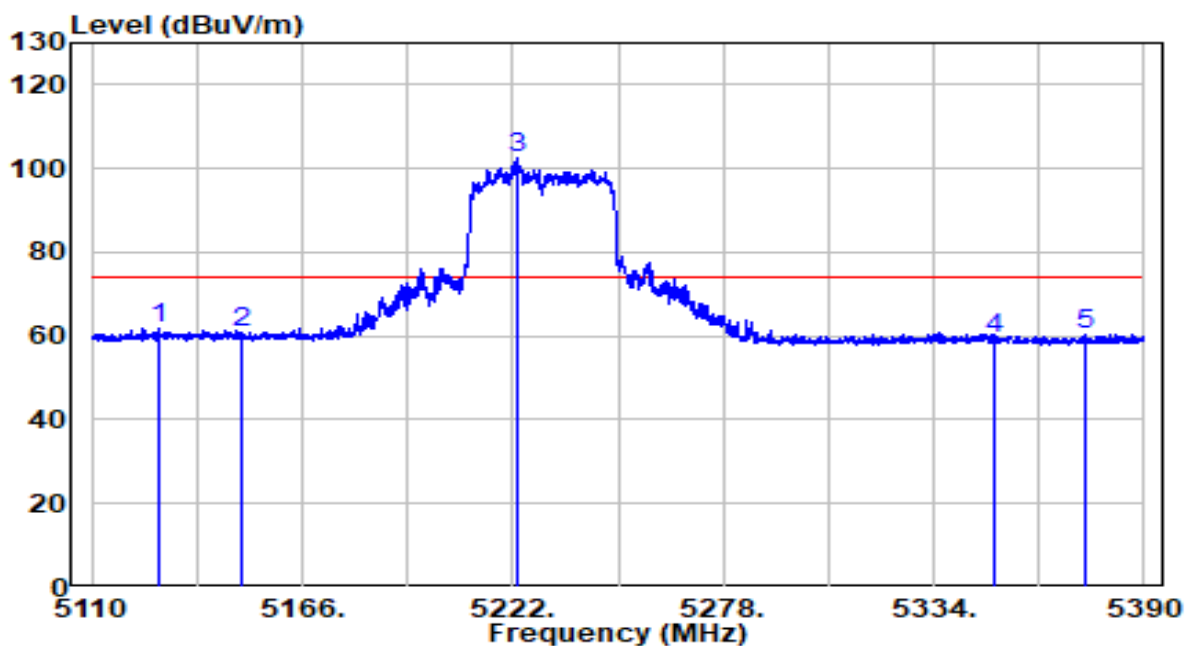


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5127.780	41.87	19.88	61.75	-12.25	74.00	Peak
2	5150.000	41.00	19.91	60.91	-13.09	74.00	Peak
3	* 5223.120	82.52	19.98	102.50	N/A	N/A	Peak
4	5350.000	39.01	20.11	59.12	-14.88	74.00	Peak
5	5374.460	40.31	20.14	60.45	-13.55	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+16dB attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-08-05
Factor	BBHA 9120D	Temp. / Humidity	24.9°C/46.3%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE40 at channel 5230MHz - Beamforming Mode	Test Voltage	120V/50Hz

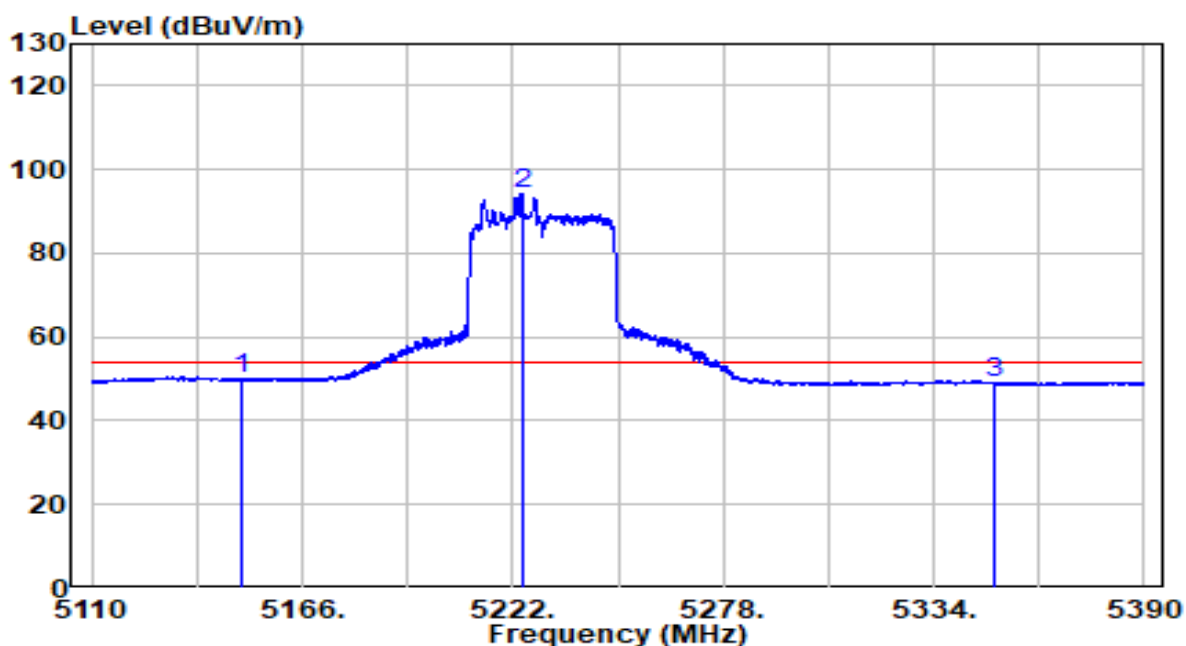


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5150.000	29.96	19.91	49.86	-4.14	54.00	Average
2	* 5224.520	74.10	19.98	94.08	N/A	N/A	Average
3	5350.000	28.79	20.11	48.90	-5.10	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+16dB attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-08-05
Factor	BBHA 9120D	Temp. / Humidity	24.9°C/46.3%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE40 at channel 5230MHz - Beamforming Mode	Test Voltage	120V/50Hz

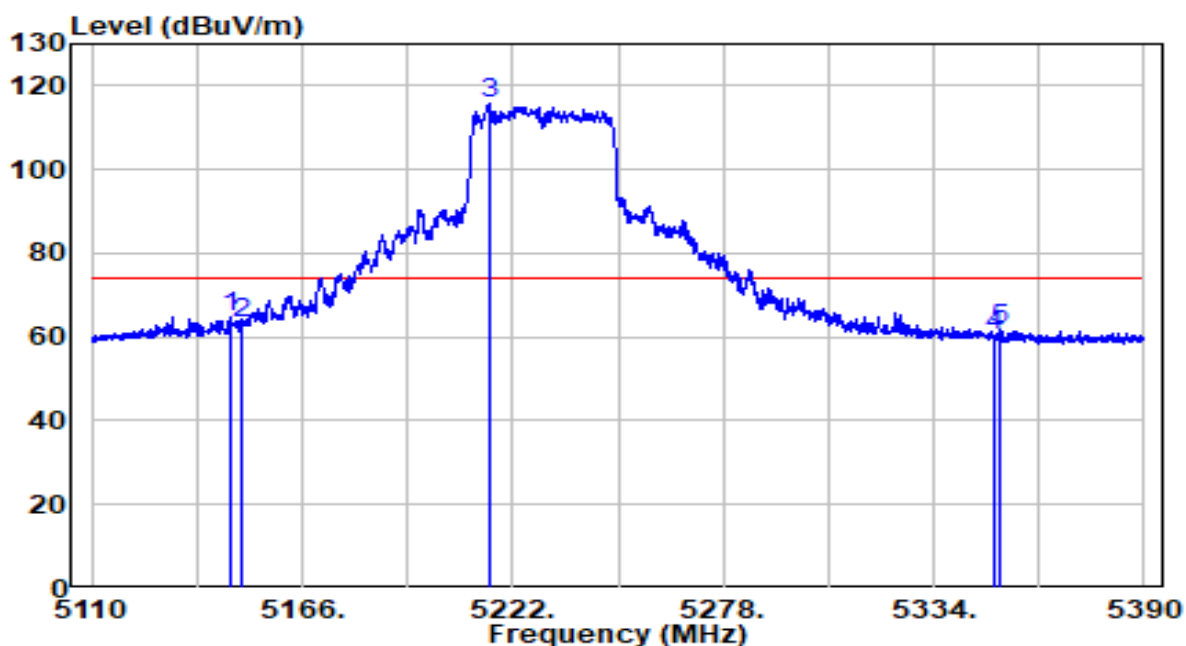


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5147.240	44.75	19.90	64.65	-9.35	74.00	Peak
2	5150.000	43.50	19.91	63.41	-10.59	74.00	Peak
3	* 5215.700	95.60	19.97	115.57	N/A	N/A	Peak
4	5350.000	40.02	20.11	60.13	-13.87	74.00	Peak
5	5351.640	41.45	20.12	61.57	-12.43	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+16dB attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-08-05
Factor	BBHA 9120D	Temp. / Humidity	24.9°C/46.3%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE40 at channel 5230MHz - Beamforming Mode	Test Voltage	120V/50Hz

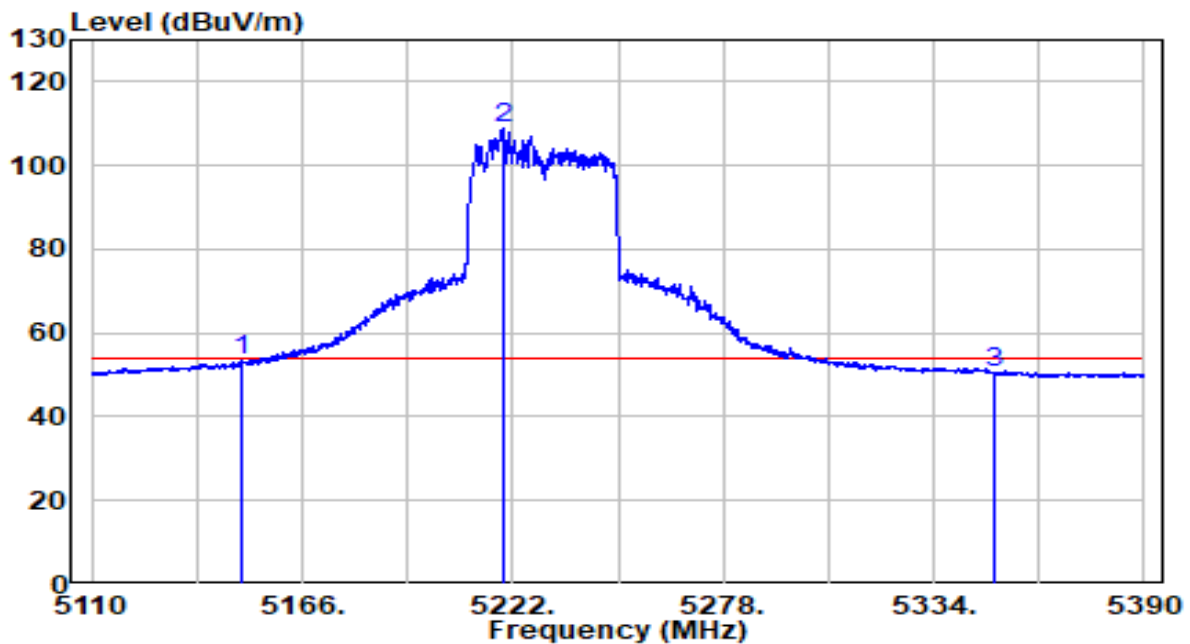


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5150.000	33.40	19.91	53.31	-0.69	54.00	Average
2	* 5219.340	88.72	19.98	108.70	N/A	N/A	Average
3	5350.000	30.51	20.11	50.63	-3.37	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+16dB attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-08-05
Factor	BBHA 9120D	Temp. / Humidity	24.9°C/43.9%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE40 at Channel 5310MHz - Beamforming mode	Test Voltage	110V/60Hz

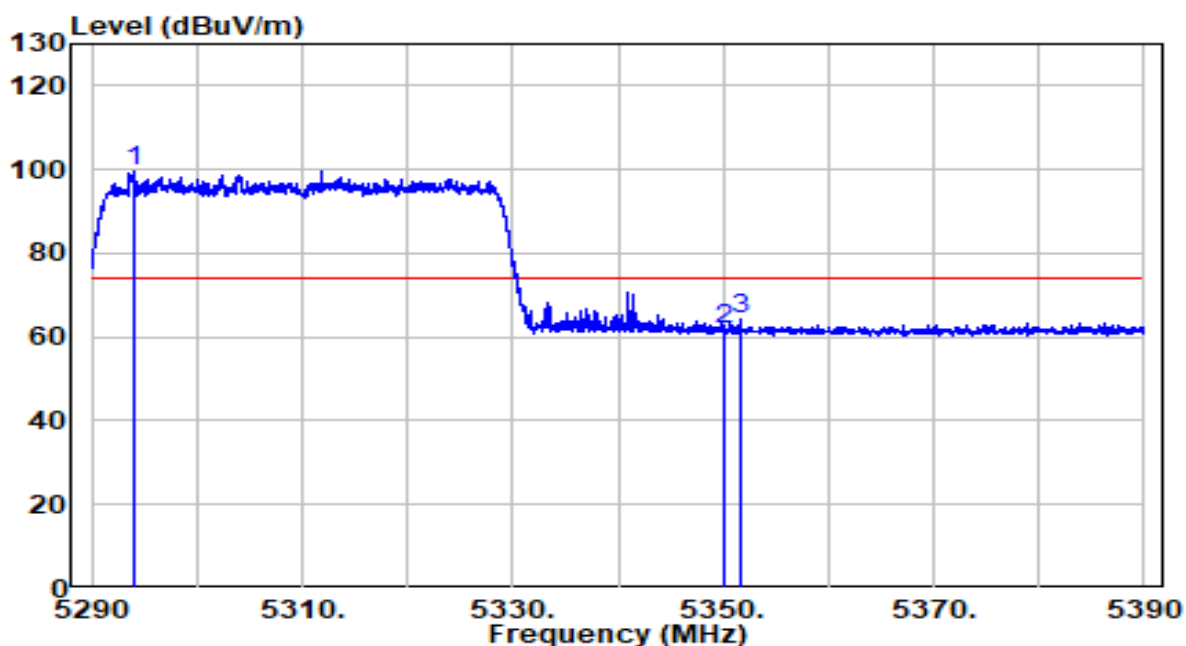


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5294.050	79.76	20.06	99.82	N/A	N/A	Peak
2		5350.000	41.85	20.11	61.96	-12.04	74.00	Peak
3		5351.650	43.97	20.12	64.09	-9.91	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+16dB attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-08-05
Factor	BBHA 9120D	Temp. / Humidity	24.9°C/43.9%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE40 at Channel 5310MHz - Beamforming mode	Test Voltage	110V/60Hz

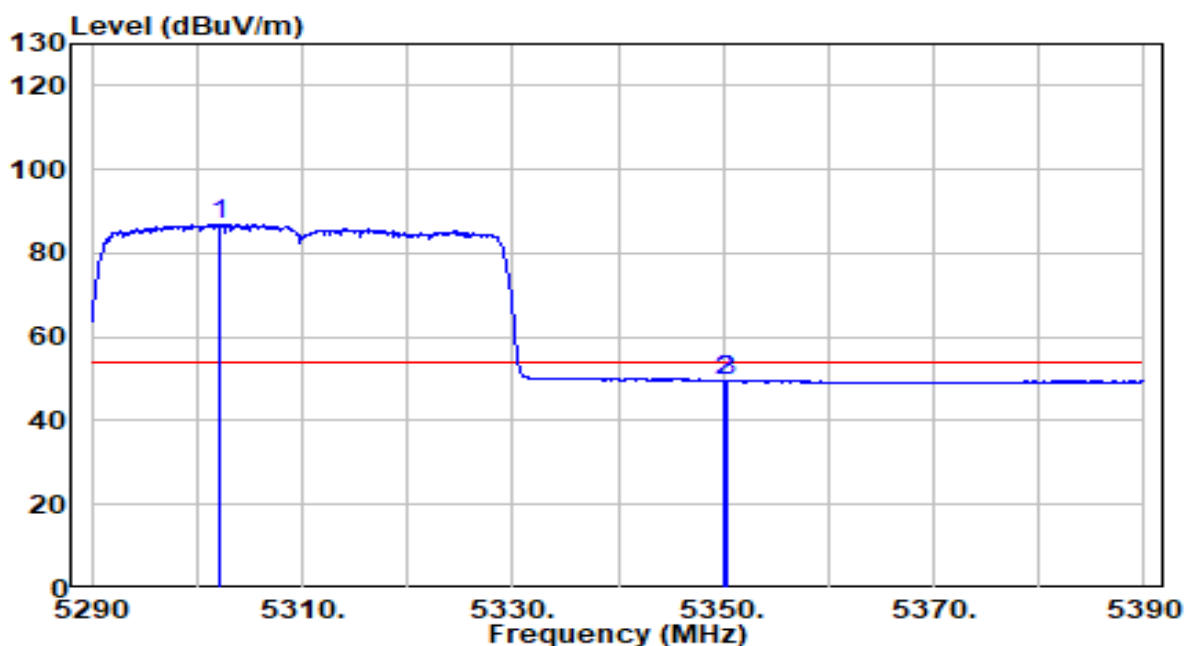


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5302.100	66.95	20.06	87.01	N/A	N/A	Average
2		5350.000	29.41	20.11	49.52	-4.48	54.00	Average
3		5350.400	29.42	20.11	49.53	-4.47	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+16dB attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-08-05
Factor	BBHA 9120D	Temp. / Humidity	24.9°C/43.9%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE40 at Channel 5310MHz - Beamforming mode	Test Voltage	110V/60Hz

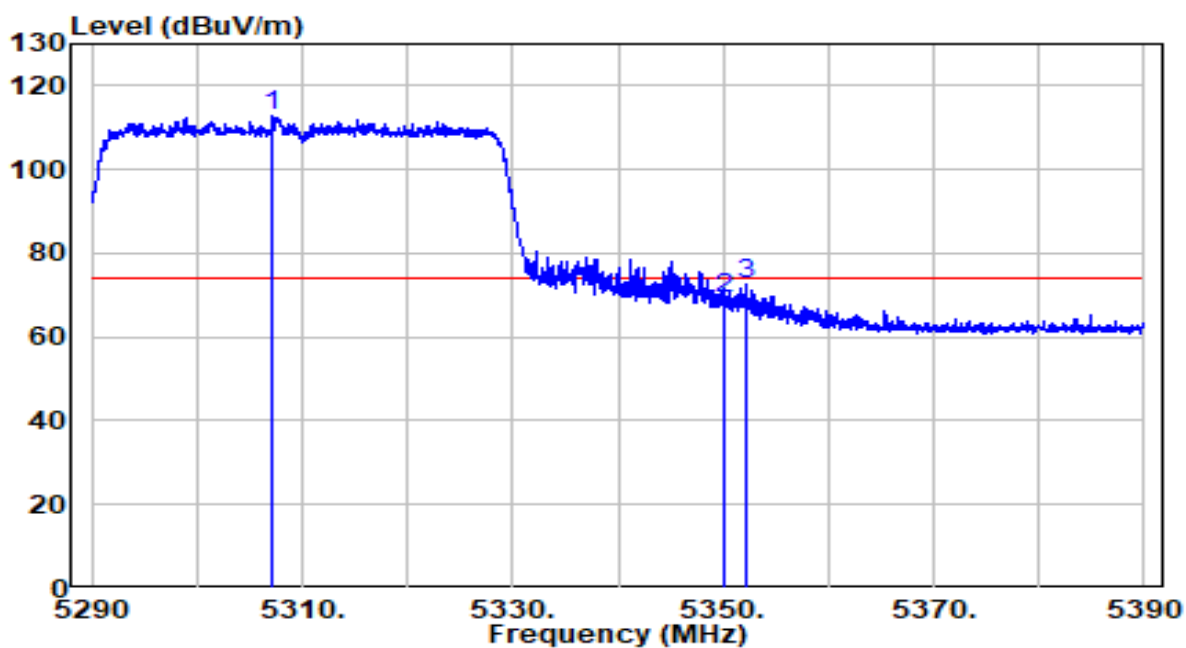


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5307.250	92.92	20.07	112.99	N/A	N/A	Peak
2		5350.000	48.99	20.11	69.11	-4.89	74.00	Peak
3		5352.100	52.46	20.12	72.58	-1.42	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+16dB attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-08-05
Factor	BBHA 9120D	Temp. / Humidity	24.9°C/43.9%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE40 at Channel 5310MHz - Beamforming mode	Test Voltage	110V/60Hz

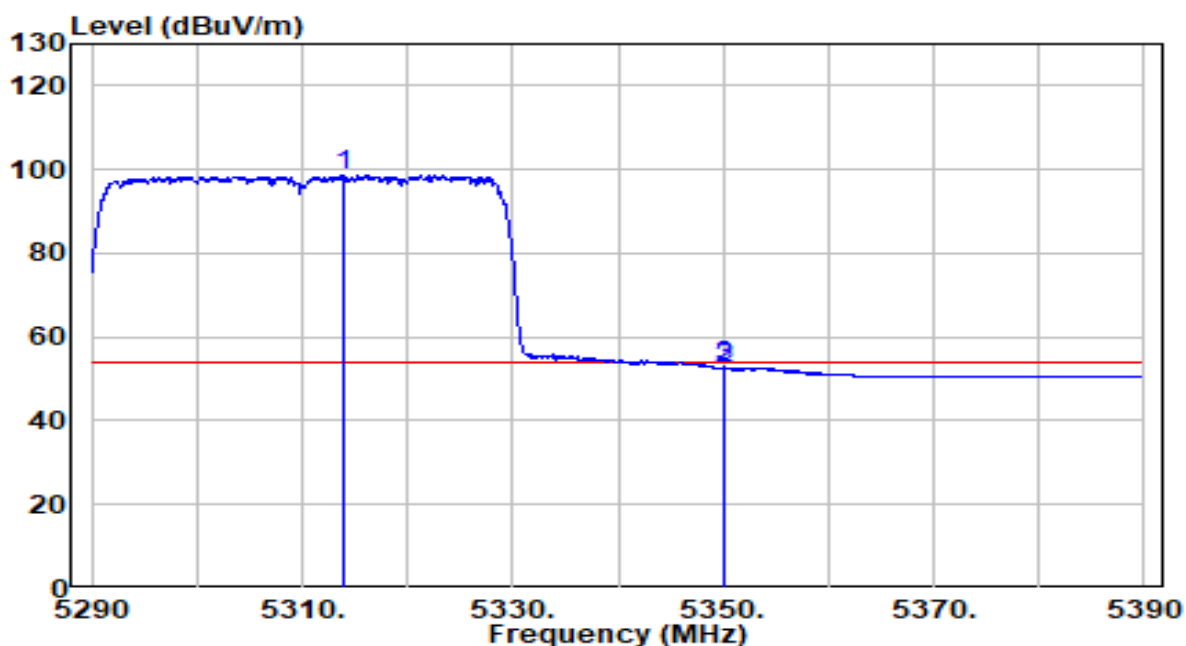


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5313.850	78.55	20.08	98.63	N/A	N/A	Average
2		5350.000	32.62	20.11	52.73	-1.27	54.00	Average
3		5350.100	32.75	20.11	52.86	-1.14	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+16dB attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-08-05
Factor	BBHA 9120D	Temp. / Humidity	24.9°C/43.9%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE40 at Channel 5510MHz - Beamforming mode	Test Voltage	110V/60Hz

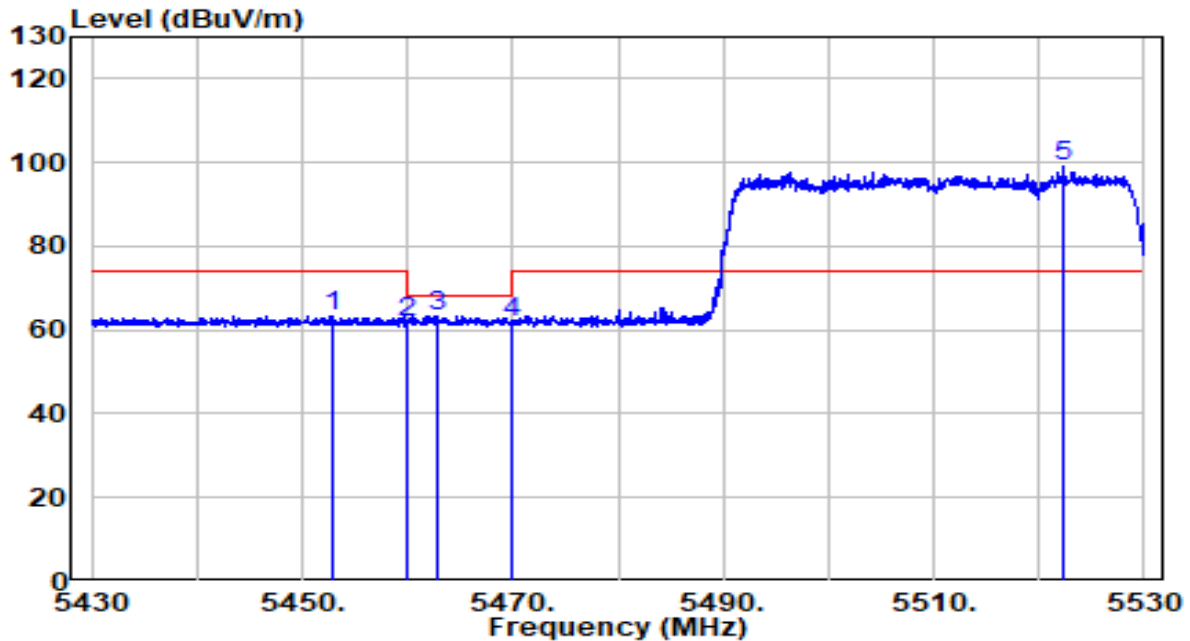


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5452.850	43.17	20.22	63.39	-10.61	74.00	Peak
2	5460.000	41.50	20.23	61.73	-6.47	68.20	Peak
3	5462.800	43.30	20.23	63.53	-4.67	68.20	Peak
4	5470.000	41.67	20.24	61.91	-6.29	68.20	Peak
5	* 5522.400	78.51	20.34	98.85	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+16dB attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-08-05
Factor	BBHA 9120D	Temp. / Humidity	24.9°C/43.9%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE40 at Channel 5510MHz - Beamforming mode	Test Voltage	110V/60Hz

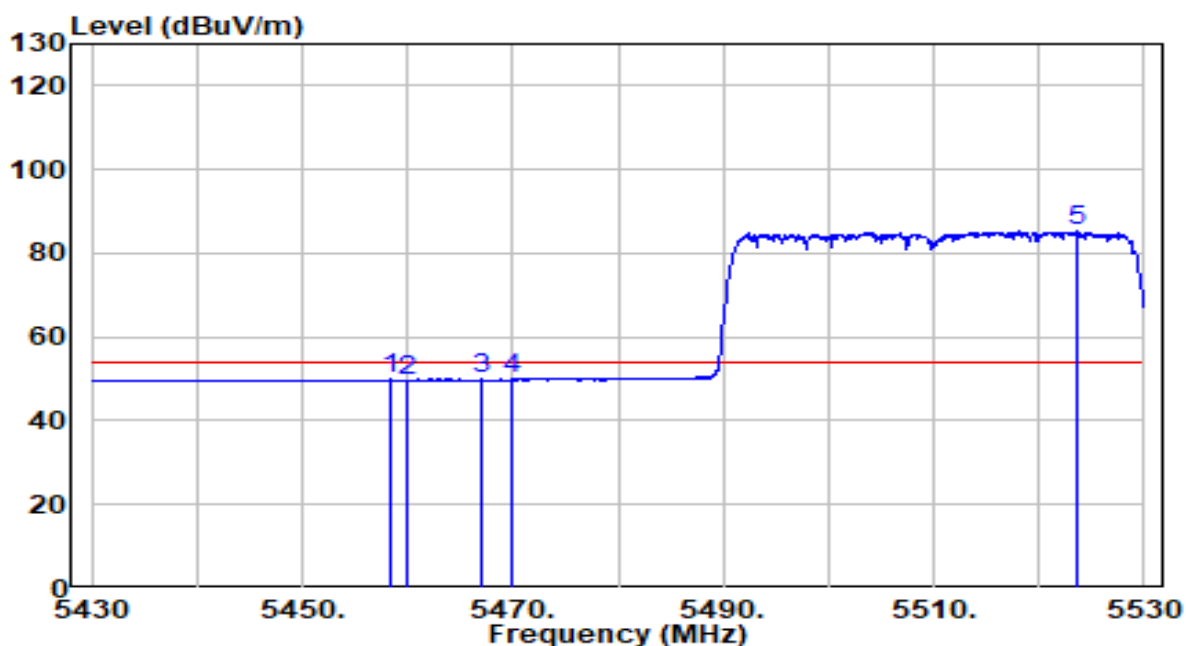


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5458.400	29.58	20.23	49.80	-4.20	54.00	Average
2	5460.000	29.47	20.23	49.69	-4.31	54.00	Average
3	5467.100	29.62	20.24	49.85	-4.15	54.00	Average
4	5470.000	29.55	20.24	49.79	-4.21	54.00	Average
5	* 5523.600	65.01	20.35	85.35	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+16dB attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-08-05
Factor	BBHA 9120D	Temp. / Humidity	24.9°C/43.9%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE40 at Channel 5510MHz - Beamforming mode	Test Voltage	110V/60Hz

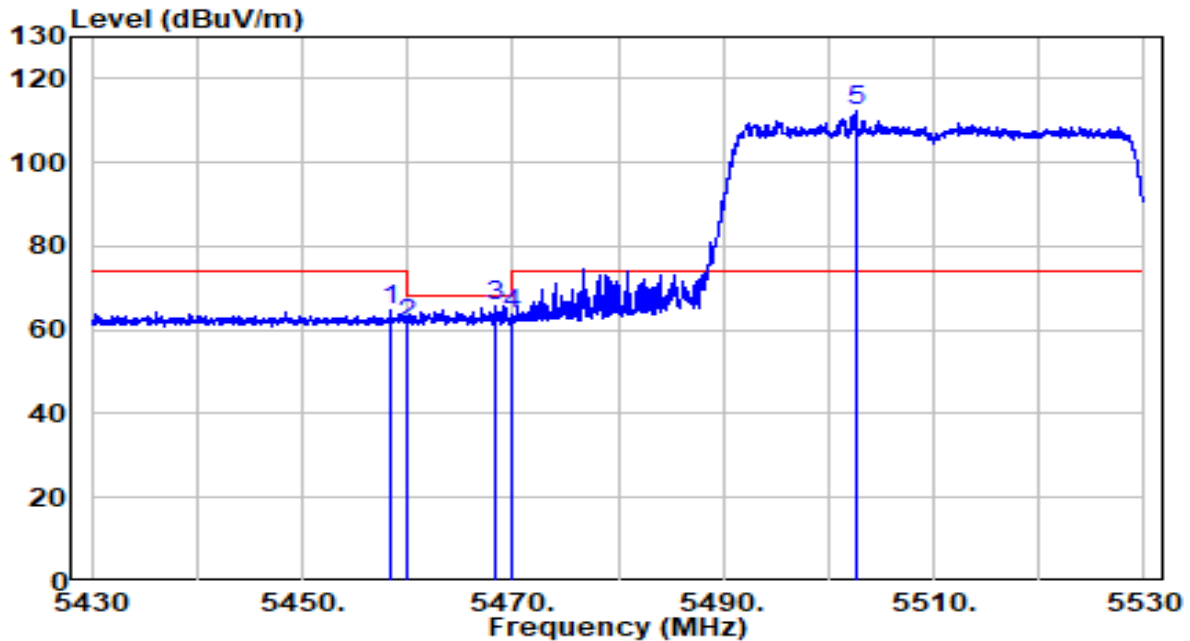


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5458.500	44.38	20.23	64.60	-9.40	74.00	Peak
2	5460.000	41.29	20.23	61.51	-6.69	68.20	Peak
3	5468.350	45.43	20.24	65.67	-2.53	68.20	Peak
4	5470.000	43.66	20.24	63.90	-4.30	68.20	Peak
5	* 5502.600	92.23	20.28	112.51	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+16dB attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-08-05
Factor	BBHA 9120D	Temp. / Humidity	24.9°C/43.9%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE40 at Channel 5510MHz - Beamforming mode	Test Voltage	110V/60Hz

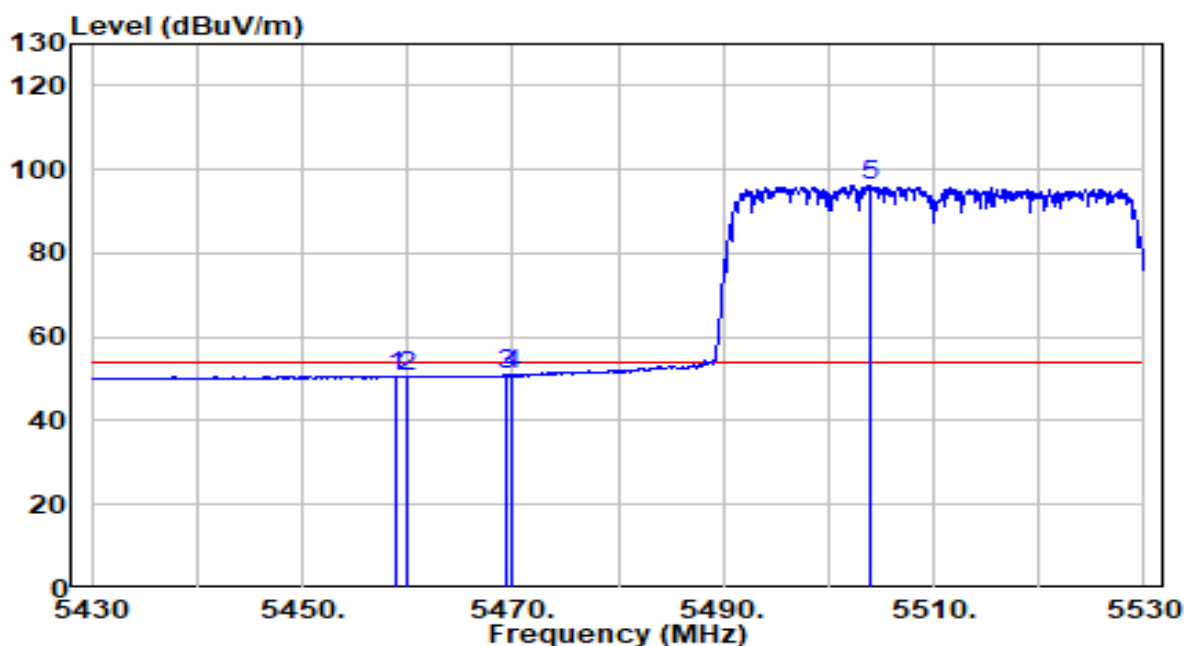


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5458.900	30.38	20.23	50.61	-3.39	54.00	Average
2	5460.000	30.16	20.23	50.38	-3.62	54.00	Average
3	5469.300	30.56	20.24	50.80	-3.20	54.00	Average
4	5470.000	30.55	20.24	50.79	-3.21	54.00	Average
5	* 5504.100	76.05	20.28	96.34	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+16dB attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-08-05
Factor	BBHA 9120D	Temp. / Humidity	24.9°C/43.9%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE40 at Channel 5670MHz - Beamforming mode	Test Voltage	110V/60Hz

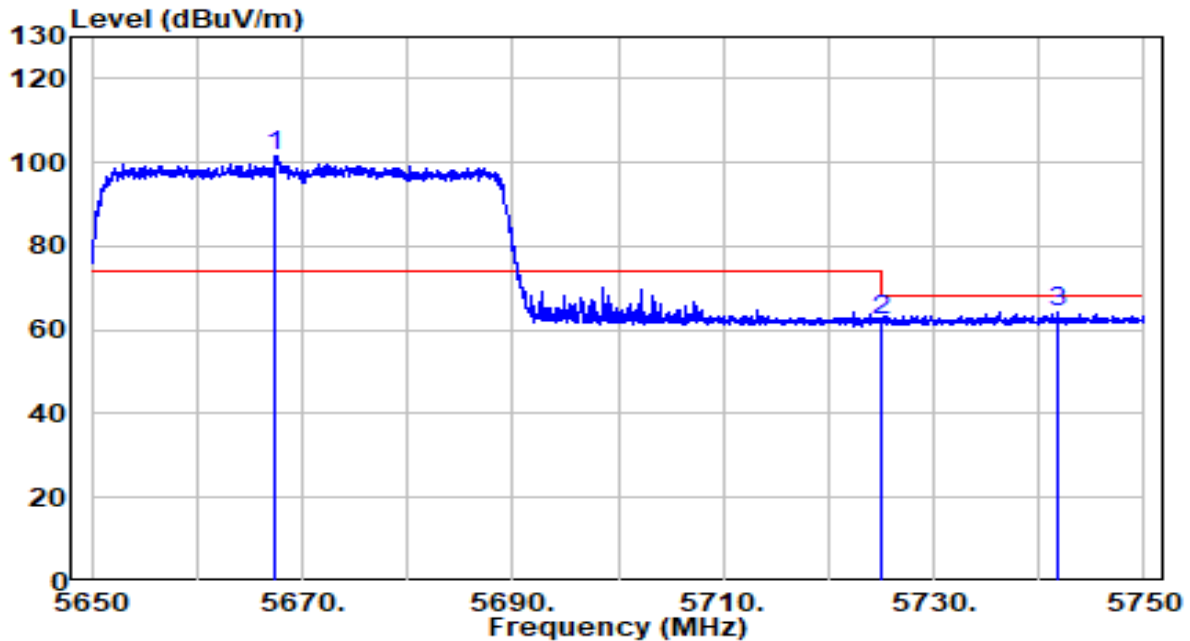


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5667.400	80.97	20.81	101.78	N/A	N/A	Peak
2		5725.000	41.13	21.00	62.13	-6.07	68.20	Peak
3		5741.800	43.15	21.05	64.20	-4.00	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+16dB attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-08-05
Factor	BBHA 9120D	Temp. / Humidity	24.9°C/43.9%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE40 at Channel 5670MHz - Beamforming mode	Test Voltage	110V/60Hz

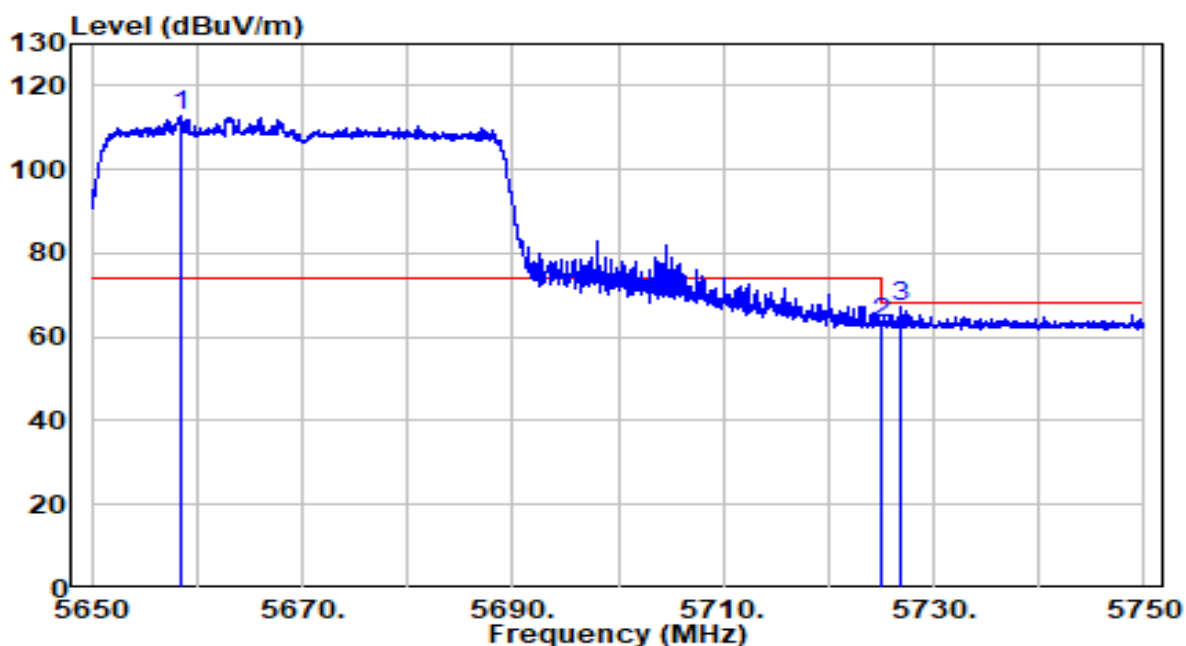


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5658.550	92.02	20.78	112.81	N/A	N/A	Peak
2		5725.000	42.13	21.00	63.13	-5.07	68.20	Peak
3		5726.900	46.08	21.01	67.09	-1.11	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+16dB attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-21
Factor	BBHA 9120D	Temp. / Humidity	26.2°C/49.7%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE40 at Channel 5755MHz - Beamforming Mode	Test Voltage	110V/60Hz

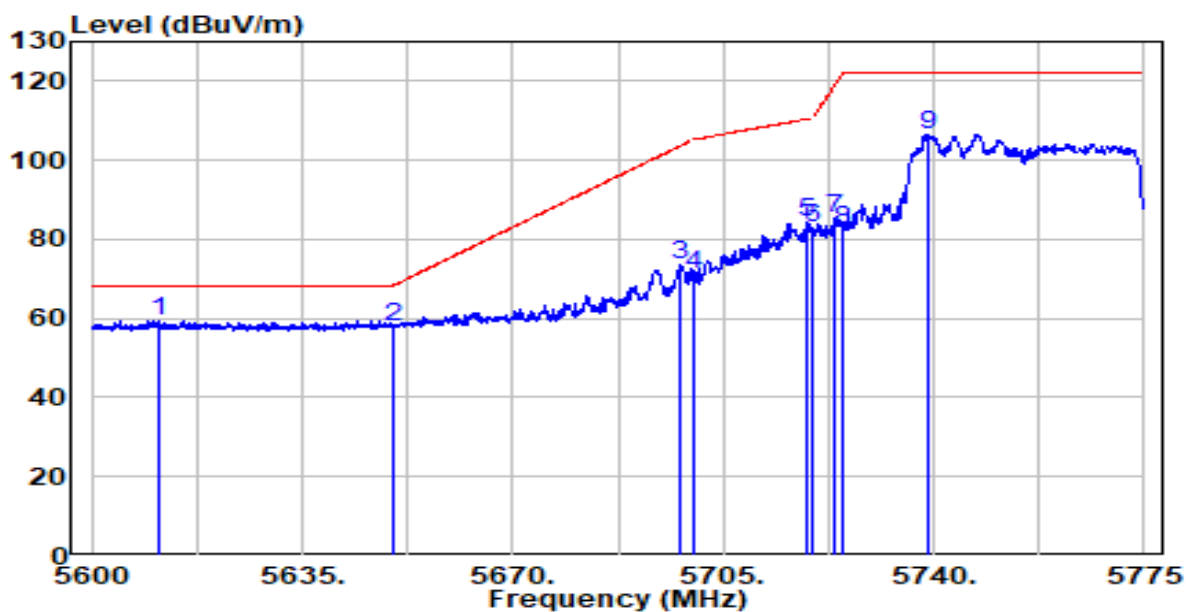


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5611.375	38.83	20.63	59.46	-8.74	68.20	Peak
2		5650.000	37.21	20.76	57.96	-10.24	68.20	Peak
3		5697.913	52.46	20.91	73.37	-30.29	103.66	Peak
4		5700.000	50.29	20.92	71.21	-33.99	105.20	Peak
5		5719.000	63.50	20.98	84.48	-26.04	110.52	Peak
6		5720.000	61.87	20.98	82.85	-27.95	110.80	Peak
7		5723.638	64.20	20.99	85.19	-33.91	119.09	Peak
8		5725.000	61.63	21.00	82.62	-39.58	122.20	Peak
9		5738.950	85.52	21.04	106.57	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+16dB attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-21
Factor	BBHA 9120D	Temp. / Humidity	26.2°C/49.7%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE40 at Channel 5755MHz - Beamforming Mode	Test Voltage	110V/60Hz

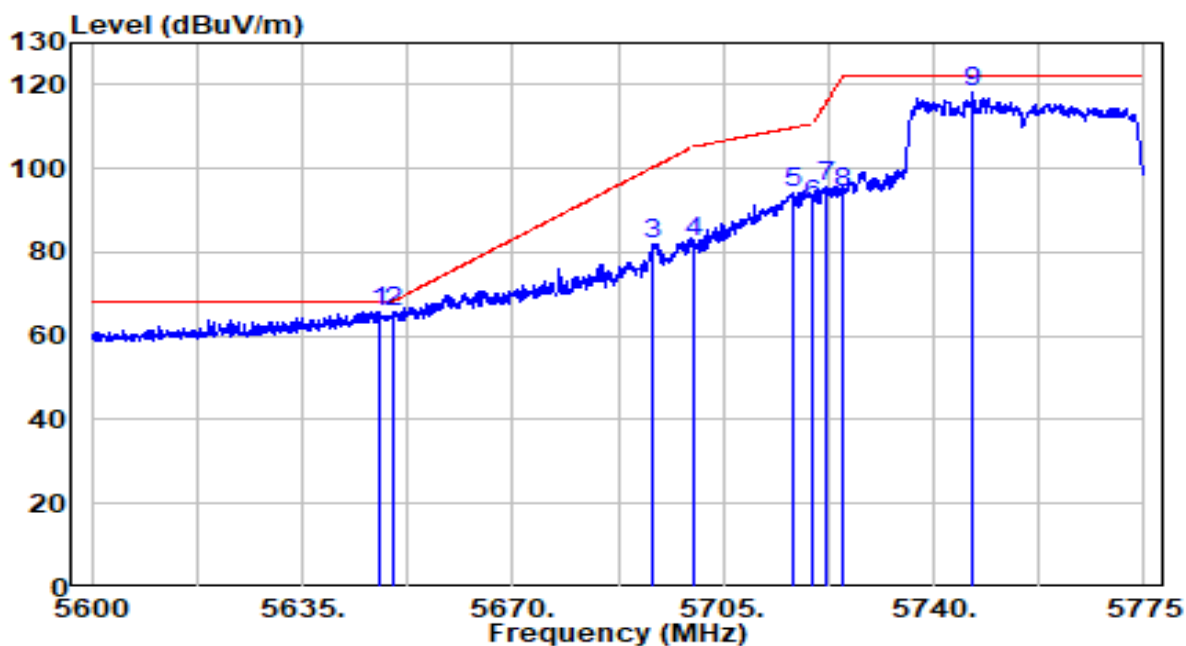


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5648.038	45.22	20.75	65.97	-2.23	68.20	Peak
2		5650.000	44.90	20.76	65.65	-2.55	68.20	Peak
3		5693.362	61.04	20.90	81.94	-18.37	100.31	Peak
4		5700.000	61.28	20.92	82.20	-23.00	105.20	Peak
5		5716.462	73.42	20.97	94.39	-15.42	109.81	Peak
6		5720.000	70.23	20.98	91.22	-19.58	110.80	Peak
7		5721.975	74.88	20.99	95.87	-19.44	115.30	Peak
8		5725.000	73.30	21.00	94.30	-27.90	122.20	Peak
9		5746.300	96.92	21.07	117.99	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+16dB attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-21
Factor	BBHA 9120D	Temp. / Humidity	26.2°C/49.7%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE40 at Channel 5795MHz - Beamforming Mode	Test Voltage	110V/60Hz

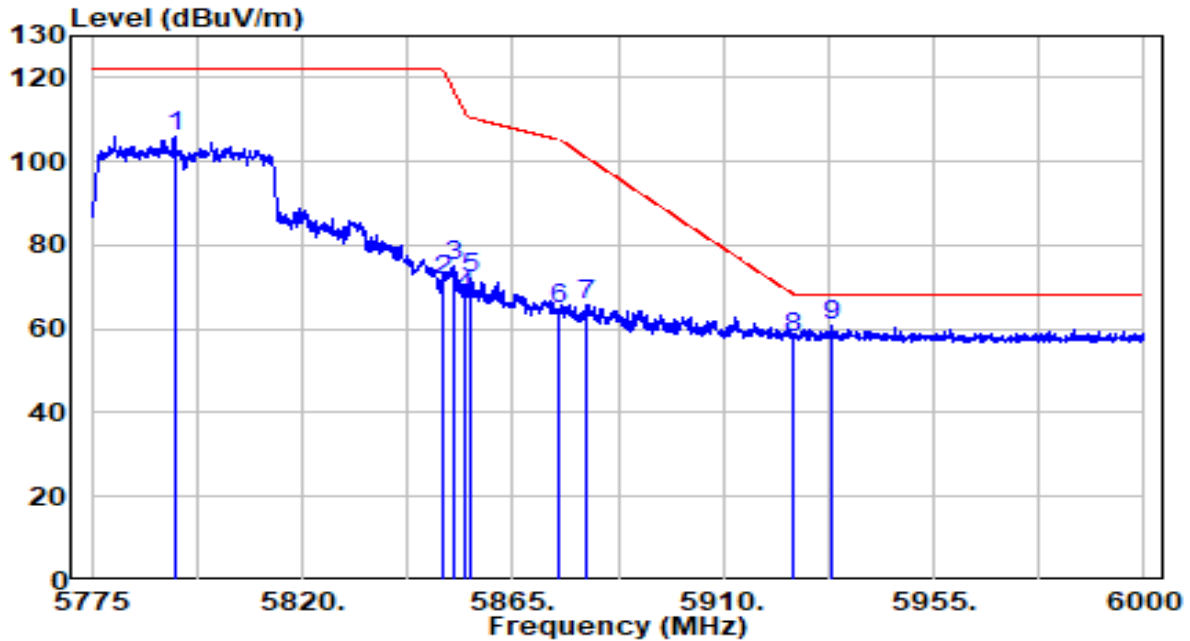


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5792.663	84.61	21.22	105.83	N/A	N/A	Peak
2	5850.038	50.15	21.40	71.55	-50.56	122.11	Peak
3	5852.625	53.51	21.41	74.93	-41.29	116.21	Peak
4	5855.000	46.38	21.42	67.80	-43.00	110.80	Peak
5	5855.888	50.70	21.42	72.12	-38.43	110.55	Peak
6	5875.000	43.09	21.49	64.57	-40.63	105.20	Peak
7	5880.525	44.30	21.50	65.80	-35.29	101.10	Peak
8	5925.000	36.03	21.65	57.67	-10.53	68.20	Peak
9	* 5933.175	39.30	21.67	60.97	-7.23	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+16dB attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-21
Factor	BBHA 9120D	Temp. / Humidity	26.2°C/49.7%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE40 at Channel 5795MHz - Beamforming Mode	Test Voltage	110V/60Hz

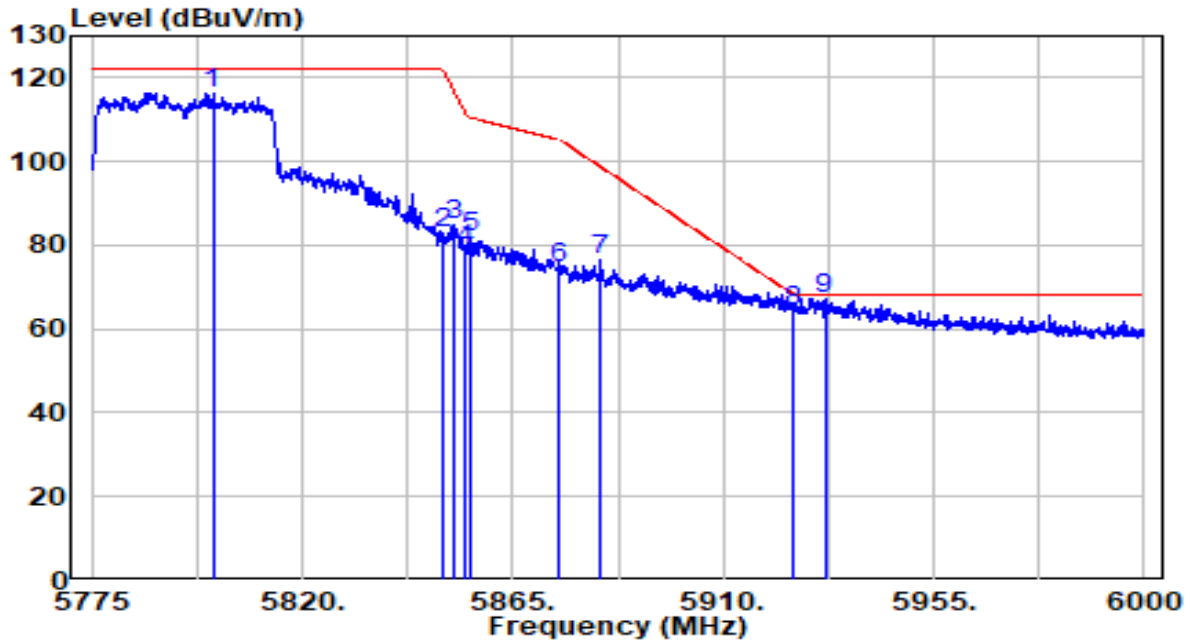


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	5800.875	95.18	21.24	116.43	N/A	N/A	Peak
2	5850.038	61.32	21.40	82.72	-39.39	122.11	Peak
3	5852.288	63.52	21.41	84.93	-32.05	116.98	Peak
4	5855.000	57.34	21.42	78.76	-32.04	110.80	Peak
5	5856.112	60.63	21.42	82.05	-28.43	110.49	Peak
6	5875.000	53.17	21.49	74.65	-30.55	105.20	Peak
7	5883.900	54.90	21.51	76.41	-22.18	98.59	Peak
8	5925.000	42.59	21.65	64.24	-3.96	68.20	Peak
9	* 5931.712	45.71	21.67	67.38	-0.82	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+16dB attenuation.
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-29
Factor	BBHA 9120D	Temp. / Humidity	24.9°C/43.9%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE80 at Channel 5210MHz - Beamforming Mode	Test Voltage	110V/60Hz

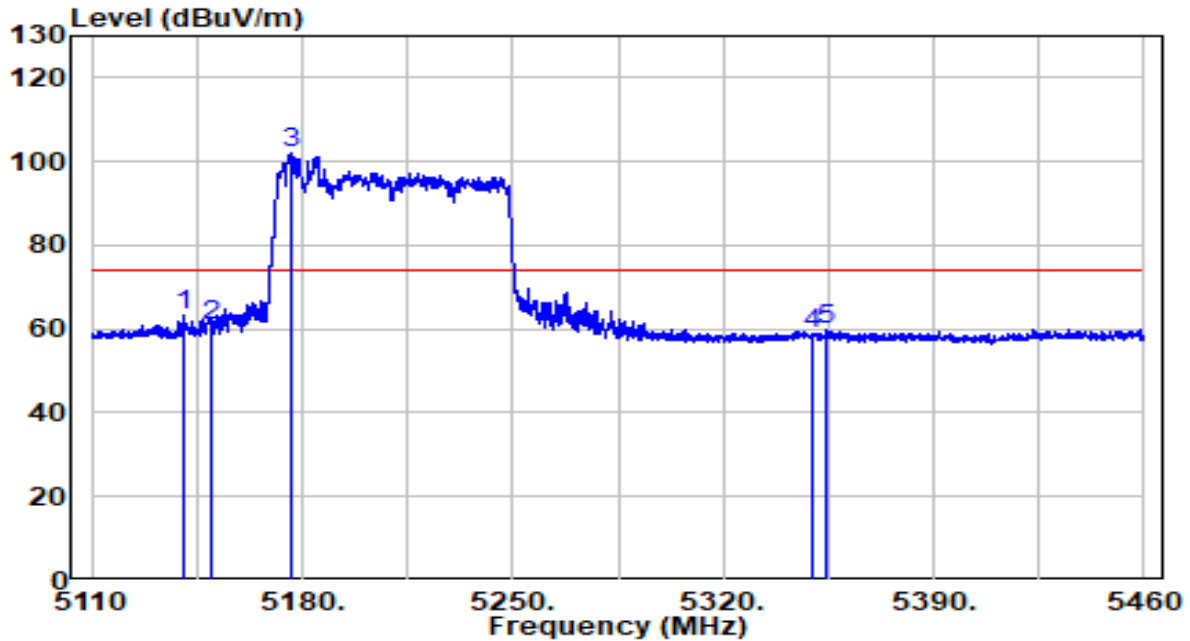


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5140.625	43.28	19.90	63.18	-10.82	74.00	Peak
2	5150.000	40.89	19.91	60.80	-13.20	74.00	Peak
3	* 5176.150	82.18	19.93	102.12	N/A	N/A	Peak
4	5350.000	38.68	20.11	58.79	-15.21	74.00	Peak
5	5354.650	39.49	20.12	59.61	-14.39	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+16dB attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-29
Factor	BBHA 9120D	Temp. / Humidity	24.9°C/43.9%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE80 at Channel 5210MHz - Beamforming Mode	Test Voltage	110V/60Hz

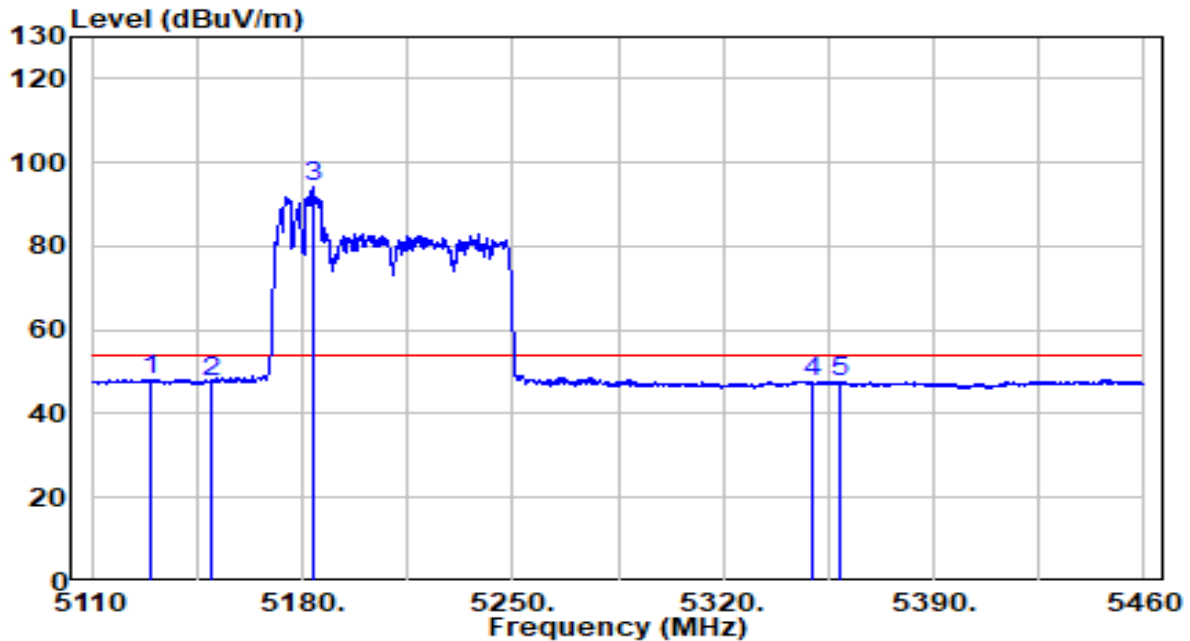


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5129.250	28.38	19.88	48.26	-5.74	54.00	Average
2	5150.000	27.85	19.91	47.75	-6.25	54.00	Average
3	* 5184.025	74.09	19.94	94.03	N/A	N/A	Average
4	5350.000	27.31	20.11	47.42	-6.58	54.00	Average
5	5359.200	27.63	20.12	47.76	-6.24	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+16dB attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-29
Factor	BBHA 9120D	Temp. / Humidity	24.9°C/43.9%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE80 at Channel 5210MHz - Beamforming Mode	Test Voltage	110V/60Hz

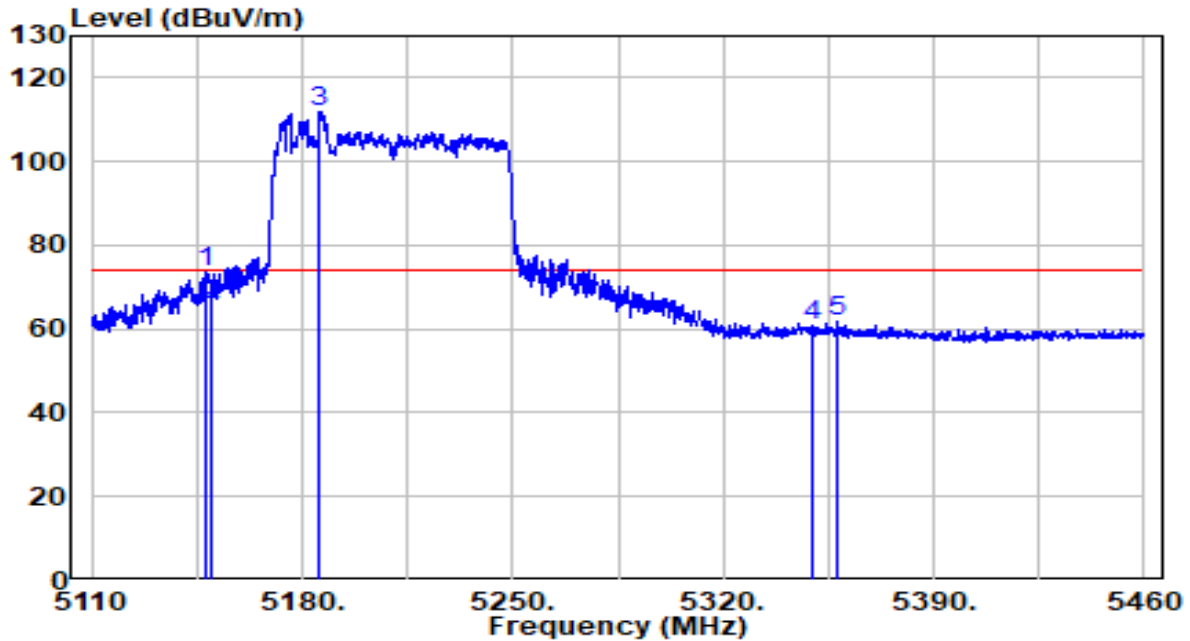


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5147.975	53.50	19.90	73.40	-0.60	74.00	Peak
2	5150.000	45.77	19.91	65.68	-8.32	74.00	Peak
3	* 5185.950	91.87	19.94	111.81	N/A	N/A	Peak
4	5350.000	40.92	20.11	61.04	-12.96	74.00	Peak
5	5358.150	41.47	20.12	61.59	-12.41	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+16dB attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-29
Factor	BBHA 9120D	Temp. / Humidity	24.9°C/43.9%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE80 at Channel 5210MHz - Beamforming Mode	Test Voltage	110V/60Hz

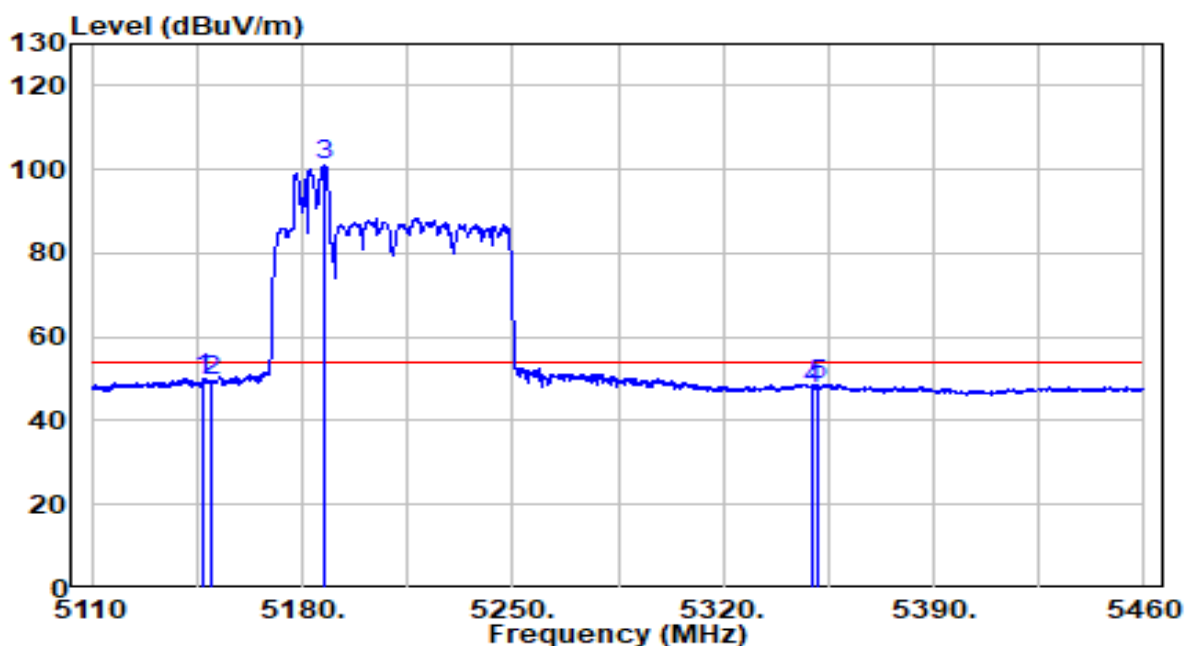


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5147.100	30.02	19.90	49.93	-4.07	54.00	Average
2	5150.000	29.51	19.91	49.41	-4.59	54.00	Average
3	* 5187.175	81.03	19.94	100.98	N/A	N/A	Average
4	5350.000	27.69	20.11	47.80	-6.20	54.00	Average
5	5351.325	28.52	20.12	48.64	-5.36	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+16dB attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	tp-link-AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-08-05
Factor	BBHA 9120D	Temp. / Humidity	23.9°C/57%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE80 at channel 5290MHz - Beamforming mode	Test Voltage	110V/60Hz

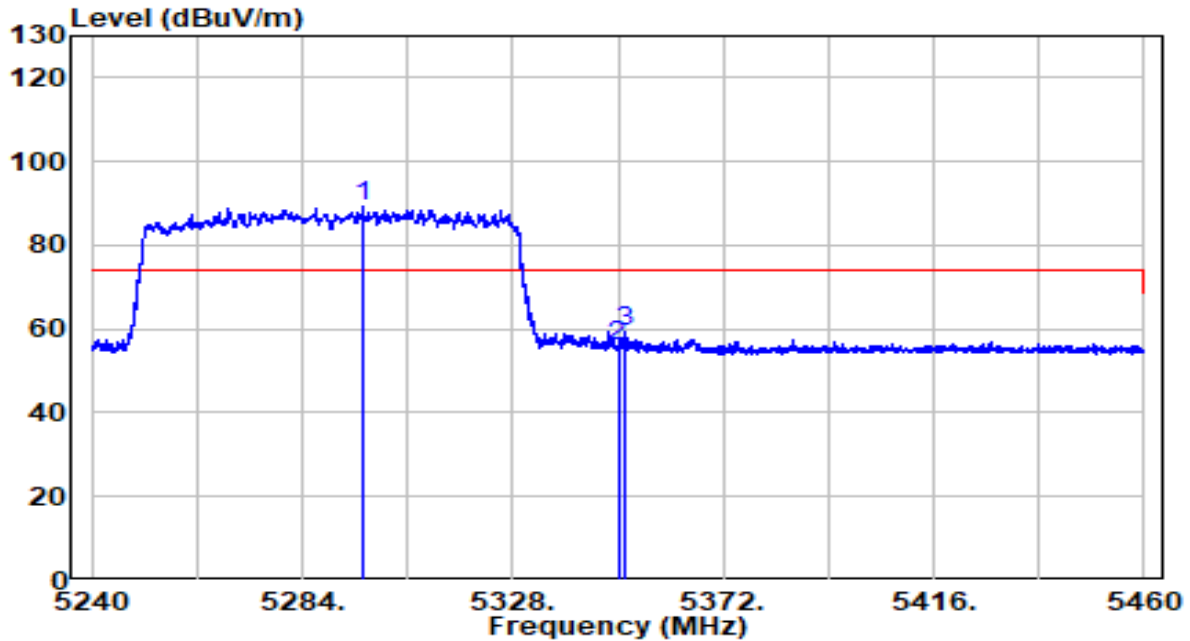


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5296.540	72.81	16.32	89.13	N/A	N/A	Peak
2		5350.000	39.61	16.08	55.69	-18.31	74.00	Peak
3		5351.210	43.05	16.09	59.14	-14.86	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+16dB attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-08-05
Factor	BBHA 9120D	Temp. / Humidity	24.9°C/43.9%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE80 at Channel 5290MHz - Beamforming mode	Test Voltage	110V/60Hz

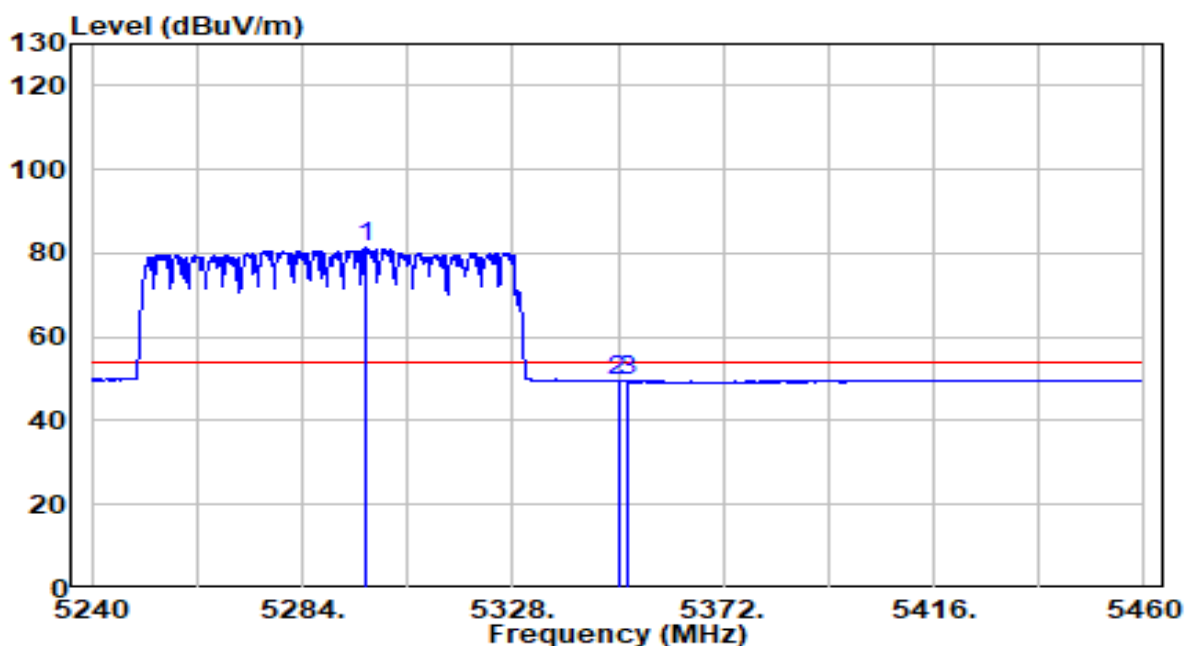


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5297.090	61.24	20.06	81.30	N/A	N/A	Average
2		5350.000	29.28	20.11	49.40	-4.60	54.00	Average
3		5351.760	29.41	20.12	49.53	-4.47	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+16dB attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-08-05
Factor	BBHA 9120D	Temp. / Humidity	24.9°C/43.9%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE80 at Channel 5290MHz - Beamforming mode	Test Voltage	110V/60Hz

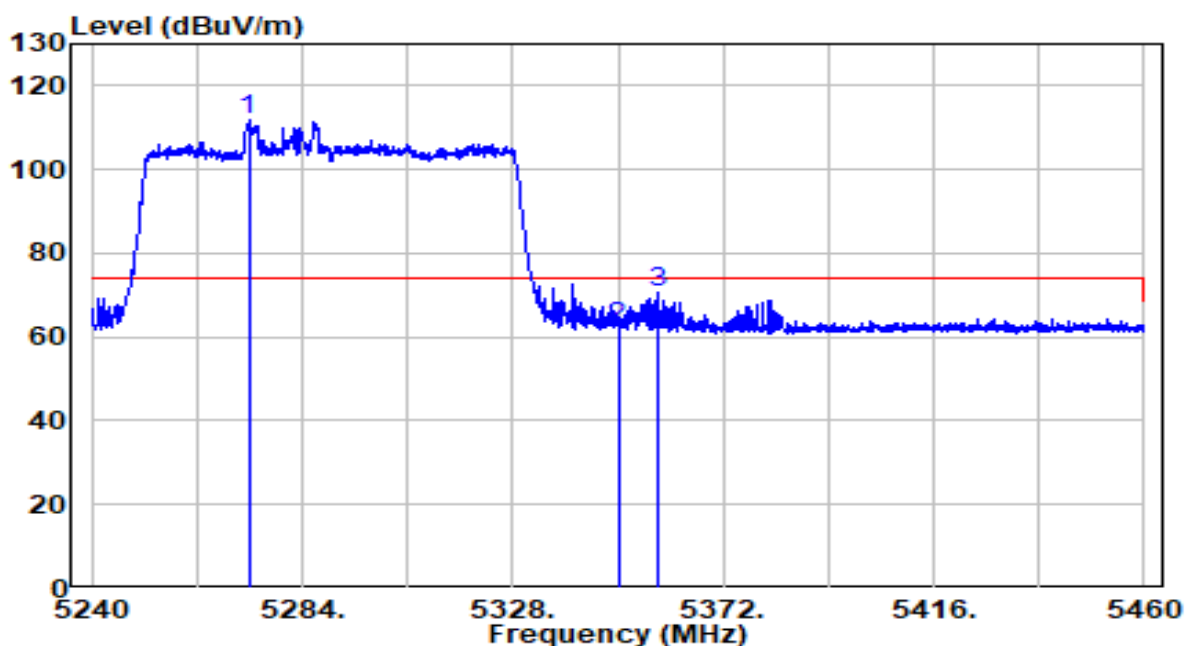


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5272.780	91.70	20.03	111.73	N/A	N/A	Peak
2		5350.000	42.23	20.11	62.35	-11.65	74.00	Peak
3		5358.470	50.57	20.12	70.70	-3.30	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+16dB attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-22
Factor	BBHA 9120D	Temp. / Humidity	24.9°C/43.9%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE80 at Channel 5290MHz - Beamforming mode	Test Voltage	110V/60Hz

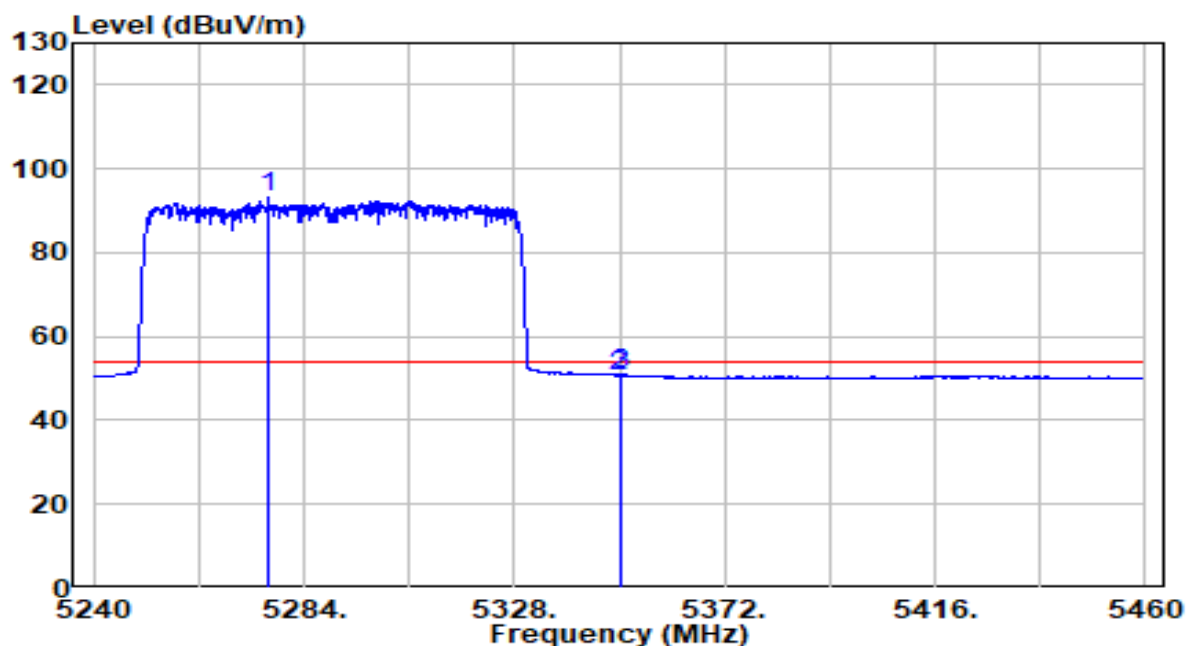


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5276.520	73.03	20.04	93.06	N/A	N/A	Average
2		5350.000	30.65	20.11	50.77	-3.23	54.00	Average
3		5350.330	30.84	20.11	50.95	-3.05	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+16dB attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-08-05
Factor	BBHA 9120D	Temp. / Humidity	24.9°C/43.9%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE80 at Channel 5530MHz - Beamforming mode	Test Voltage	110V/60Hz

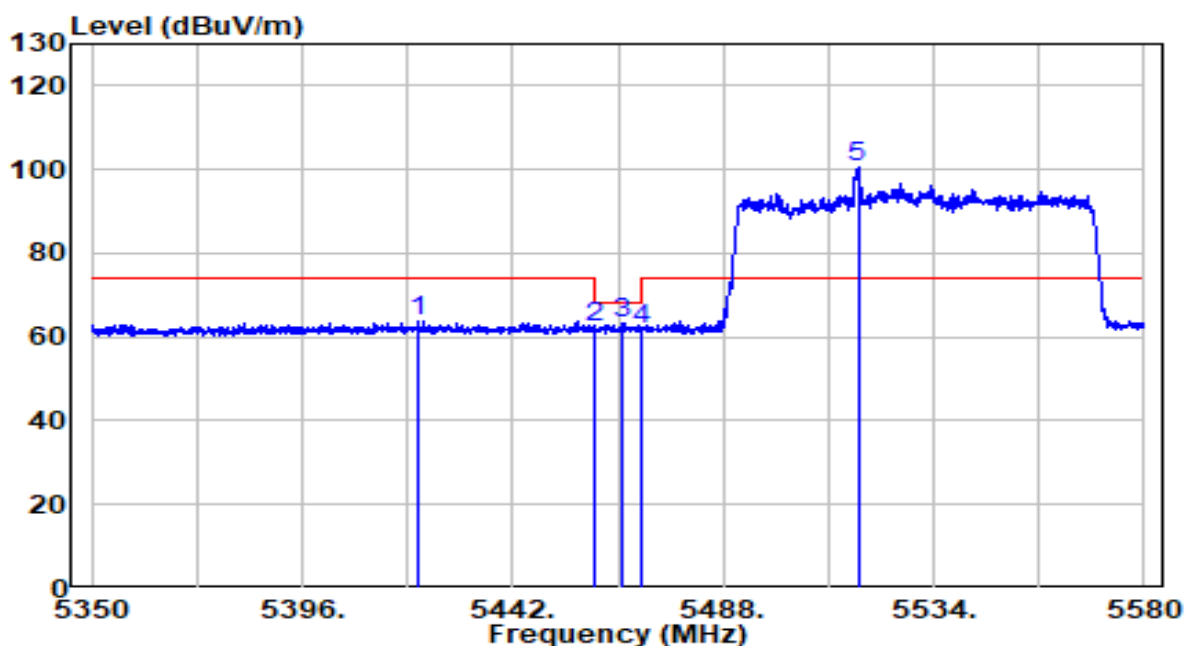


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5421.530	43.71	20.19	63.90	-10.10	74.00	Peak
2	5460.000	41.92	20.23	62.15	-6.05	68.20	Peak
3	5465.805	42.91	20.23	63.14	-5.06	68.20	Peak
4	5470.000	41.72	20.24	61.96	-6.24	68.20	Peak
5	* 5517.440	80.05	20.33	100.38	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+16dB attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-08-05
Factor	BBHA 9120D	Temp. / Humidity	24.9°C/43.9%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE80 at Channel 5530MHz - Beamforming mode	Test Voltage	110V/60Hz

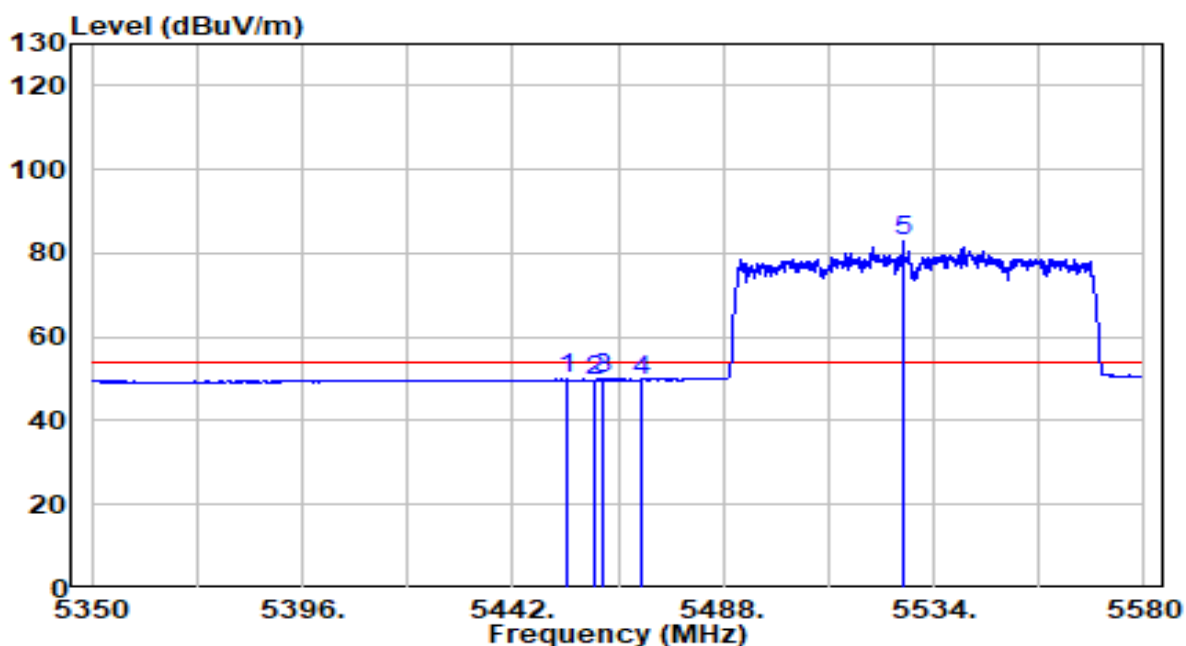


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5453.730	29.61	20.22	49.84	-4.16	54.00	Average
2	5460.000	29.51	20.23	49.74	-4.26	54.00	Average
3	5461.665	29.71	20.23	49.94	-4.06	54.00	Average
4	5470.000	29.51	20.24	49.75	-4.25	54.00	Average
5	* 5527.215	62.43	20.36	82.79	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+16dB attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-08-05
Factor	BBHA 9120D	Temp. / Humidity	24.9°C/43.9%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE80 at Channel 5530MHz - Beamforming mode	Test Voltage	110V/60Hz

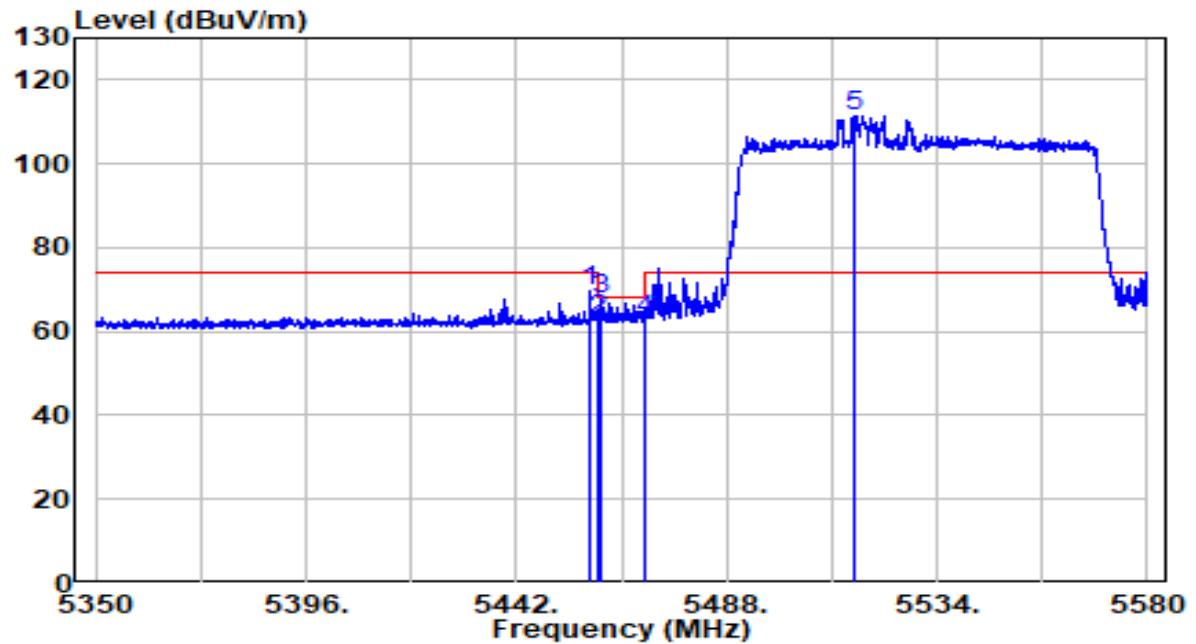


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5458.100	49.29	20.23	69.52	-4.48	74.00	Peak
2	5460.000	42.50	20.23	62.73	-5.47	68.20	Peak
3	* 5460.285	47.62	20.23	67.85	-0.35	68.20	Peak
4	5470.000	42.44	20.24	62.67	-5.53	68.20	Peak
5	* 5516.060	91.20	20.32	111.52	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+16dB attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-08-05
Factor	BBHA 9120D	Temp. / Humidity	24.9°C/43.9%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE80 at Channel 5530MHz - Beamforming mode	Test Voltage	110V/60Hz

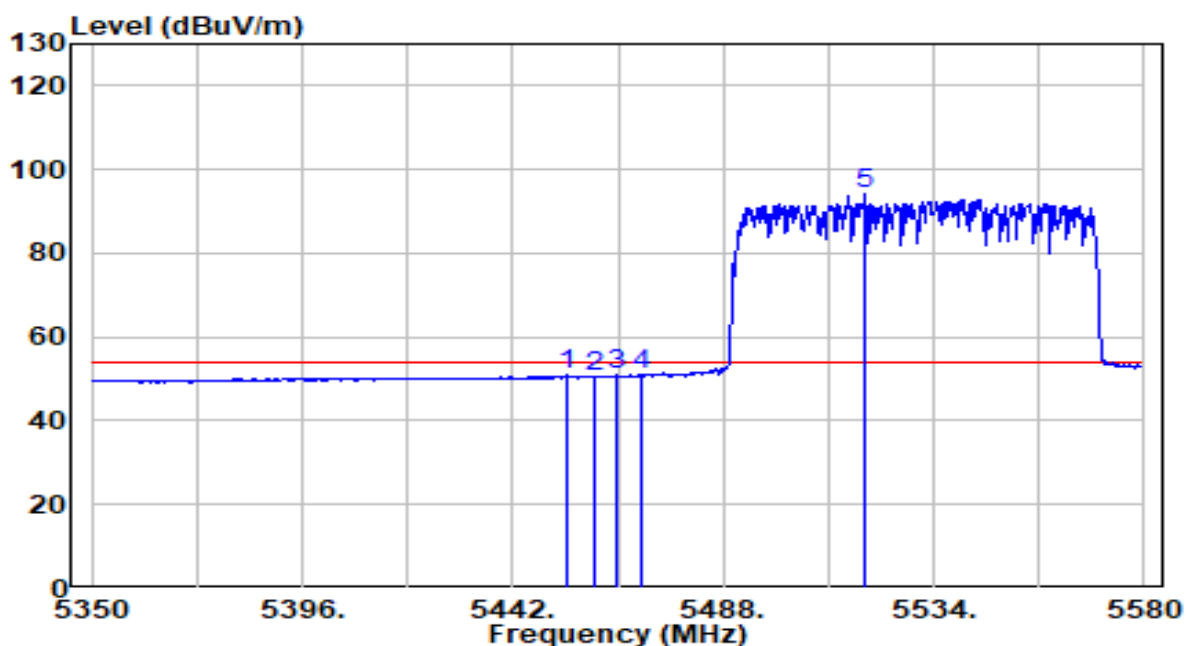


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5453.845	30.64	20.22	50.86	-3.14	54.00	Average
2	5460.055	30.30	20.23	50.53	-3.47	54.00	Average
3	5464.540	30.60	20.23	50.84	-3.16	54.00	Average
4	5470.000	30.60	20.24	50.84	-3.16	54.00	Average
5	* 5518.935	73.82	20.33	94.15	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+16dB attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-21
Factor	BBHA 9120D	Temp. / Humidity	26.2°C/49.7%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE80 at Channel 5775MHz - Beamforming Mode	Test Voltage	110V/60Hz

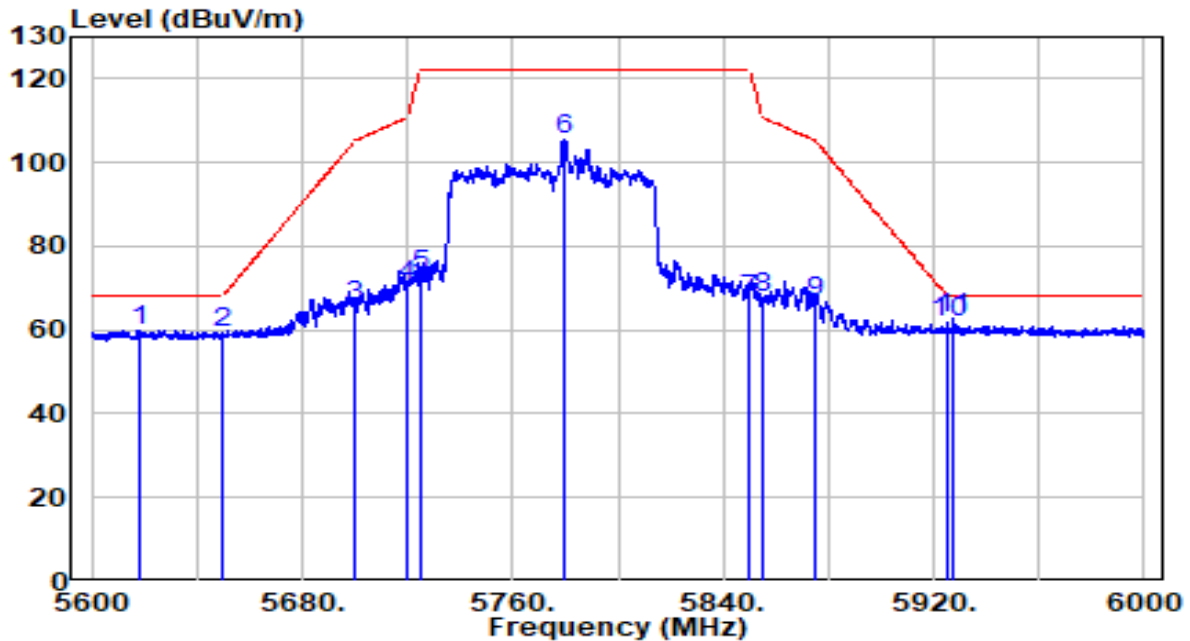


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5618.600	39.30	20.65	59.95	-8.25	68.20	Peak
2	5650.000	38.55	20.76	59.30	-8.90	68.20	Peak
3	5700.000	44.92	20.92	65.84	-39.36	105.20	Peak
4	5720.000	49.80	20.98	70.78	-40.02	110.80	Peak
5	5725.000	51.87	21.00	72.87	-49.33	122.20	Peak
6	5780.000	84.06	21.18	105.24	N/A	N/A	Peak
7	5850.000	45.89	21.40	67.30	-54.90	122.20	Peak
8	5855.000	46.38	21.42	67.80	-43.00	110.80	Peak
9	5875.000	44.99	21.49	66.48	-38.72	105.20	Peak
10	5925.000	40.25	21.65	61.90	-6.30	68.20	Peak
11	* 5927.400	41.20	21.65	62.85	-5.35	68.20	Peak

Note:

1. " *", means this data is the worst emission level.

2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+16dB attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-21
Factor	BBHA 9120D	Temp. / Humidity	26.2°C/49.7%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE80 at Channel 5775MHz - Beamforming Mode	Test Voltage	110V/60Hz

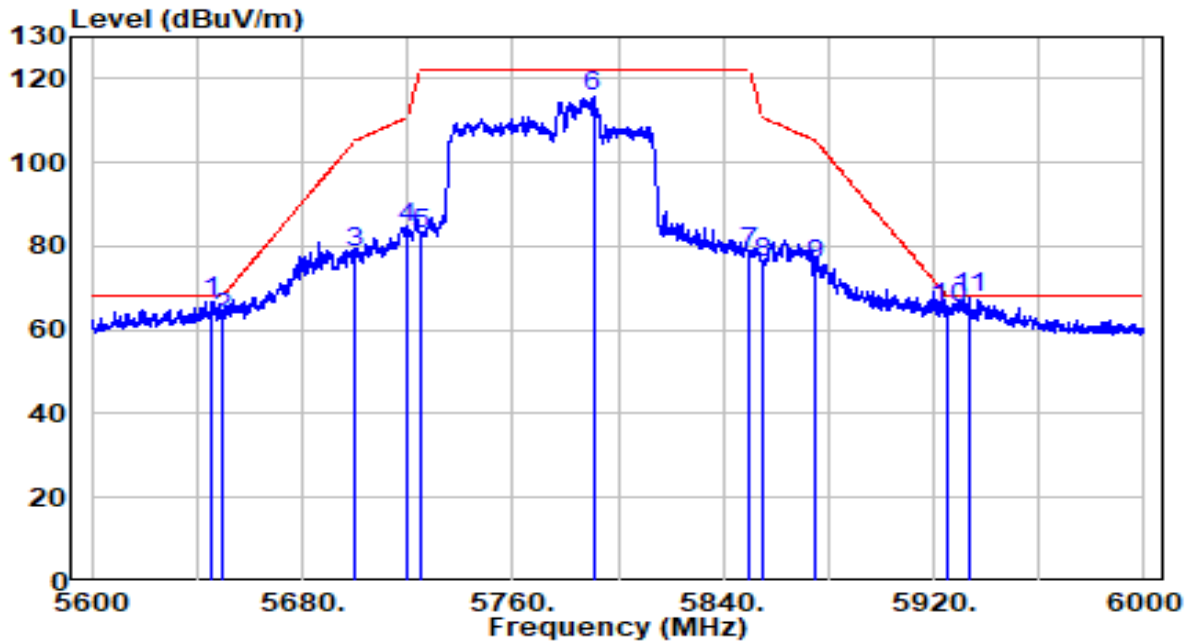

No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5645.800	44.65	22.17	66.83	-1.37	68.20	Peak
2	5650.000	40.56	22.26	62.82	-5.38	68.20	Peak
3	5700.000	56.18	22.43	78.60	-26.60	105.20	Peak
4	5720.000	62.22	22.39	84.61	-26.19	110.80	Peak
5	5725.000	60.55	22.42	82.97	-39.23	122.20	Peak
6	5790.600	93.02	22.71	115.73	N/A	N/A	Peak
7	5850.000	55.68	22.81	78.49	-43.71	122.20	Peak
8	5855.000	53.17	22.82	75.99	-34.81	110.80	Peak
9	5875.000	52.68	22.92	75.60	-29.60	105.20	Peak
10	5925.000	42.25	23.10	65.35	-2.85	68.20	Peak
11	* 5933.400	44.56	23.18	67.74	-0.46	68.20	Peak

Note:

1. " *", means this data is the worst emission level.

2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+16dB attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

5.8. 不必要之發射

5.8.1. 適用標準

依據國家通訊傳播委員會低功率射頻器材技術規範之第 5.7.3 節：

在 5.725 GHz~5.850 GHz 的頻段操作之發射器：所有頻帶邊緣向外 5 MHz 內頻率之發射，有效等向輻射功率(EIRP) ≤ 27 dBm/MHz~15.6 dBm/MHz (以線性法計算對應之限制值)；所有頻帶邊緣向外 5 MHz~25 MHz，有效等向輻射功率(EIRP) ≤ 15.6 dBm/MHz~10 dBm/MHz (以線性法計算對應之限制值)；所有頻帶邊緣外 25 MHz~75 MHz，有效等向輻射功率(EIRP) ≤ 10 dBm/MHz~-27 dBm/MHz (以線性法計算對應之限制值)；所有頻帶邊緣外 ≥ 75 MHz 的頻率之發射，有效等向輻射功率(EIRP) ≤ -27 dBm/MHz；

測量不必要發射時，應使用之最低解析頻寬為 1 MHz。必要時，於頻帶邊緣附近可使用小於 1 MHz 之解析頻寬，並以補償方式計算其總值。

當測量不必要發射之限制值時，應將待測物的載波頻率調整到儘可能接近設備設計所允許的上、下頻帶邊緣。

在 1 GHz 以下不必要之發射，應符合 2.8 之規定，任何使用市電為供應電源之設備亦須符合 2.3 之電源線傳導限制值。


不必要發射頻率屬 2.7 規定頻段者，應符合 2.8 之規定。

5.8.2. 量測方法


低頻待測物置於高 80 公分之非導體桌面（落地型產品置於地上），高頻待測物置於高 150 公分之非導體桌面，受測物與配件設備之電源線無須束綁，桌面上受測設備的所有電源線由桌子的後緣垂下沿旋轉桌表面接至交流插座。落地型設備的交流電源線可以方便的型態走線。桌面可 360 度旋轉，接收天線置於距待測物 3m 距離，高度可在 1 至 4 公尺間變動，以量測待測物之最大輻射電場強度。接收天線並應於水準及垂直極化方向各量測一次。

5.8.3. 測試架構圖

Below 1GHz Test Setup:

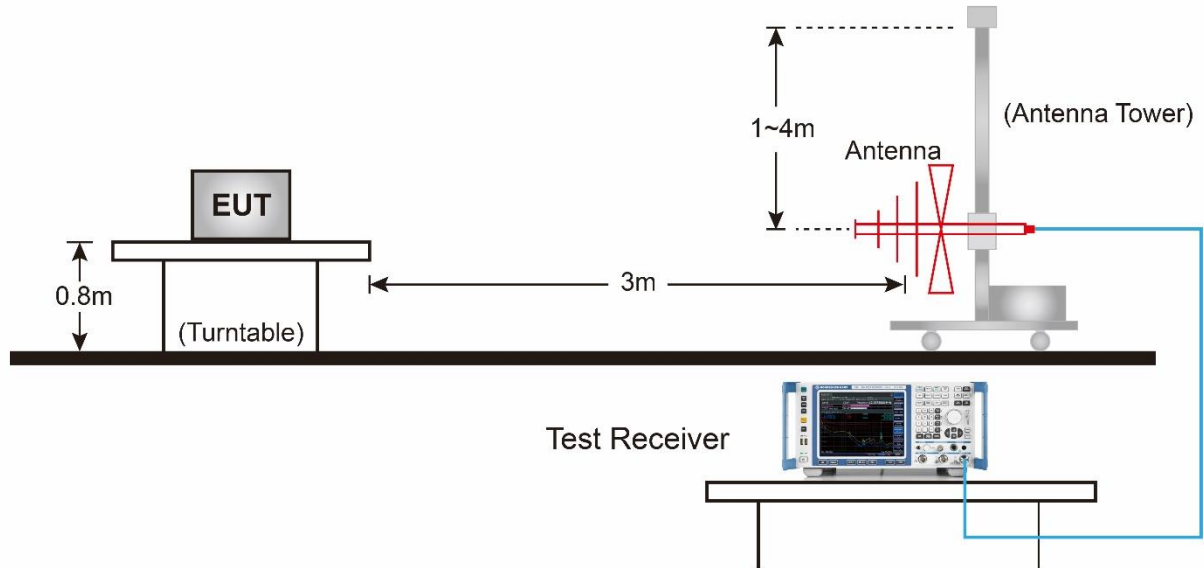


Above 1GHz Test Setup:

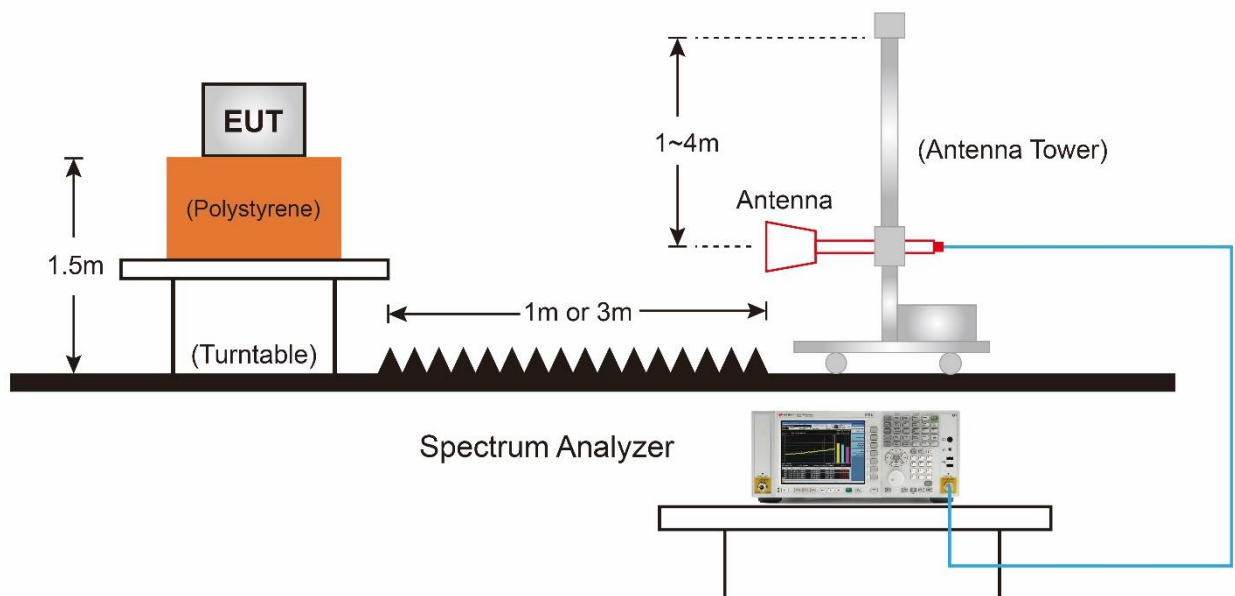

5.8.4. 不必要之發射測試結果

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-21
Factor	BBHA 9120D	Temp. / Humidity	26.9°C/50%
Polarity	Horizontal	Site / Test Engineer	AC1 / Peter Xu
Test Mode	Transmit by 802.11a at Channel 5180MHz - CDD Mode	Test Voltage	110V/60Hz

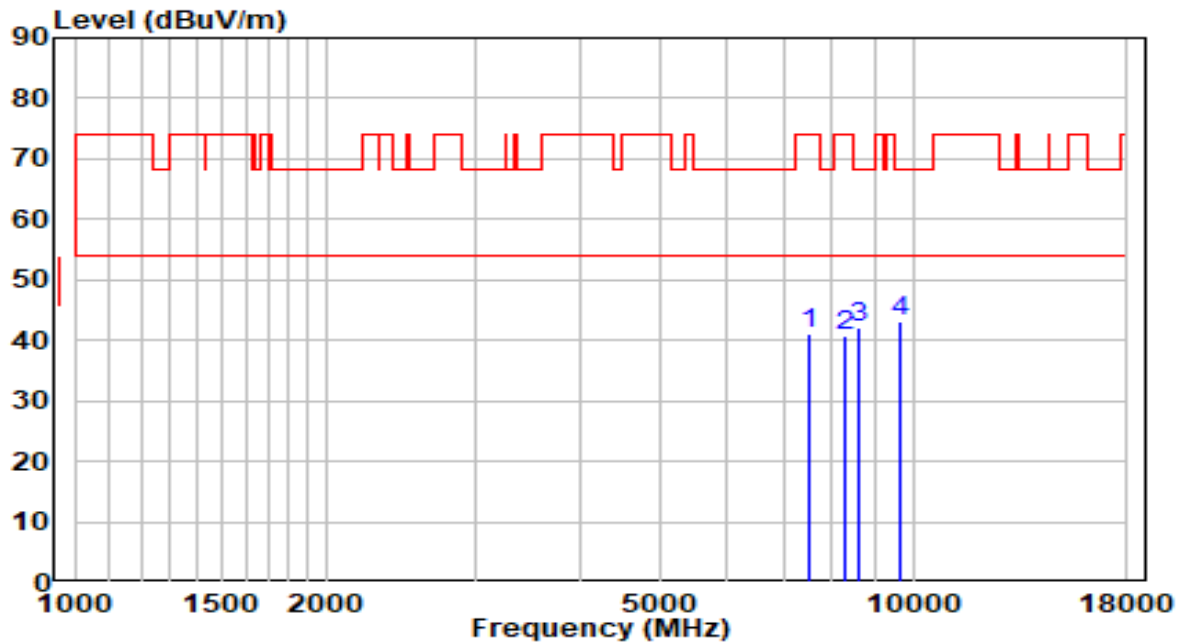


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7502.500	29.48	11.72	41.20	-32.80	74.00	Peak
2	8267.500	28.25	12.49	40.74	-33.26	74.00	Peak
3	8616.000	29.42	12.74	42.16	-26.04	68.20	Peak
4	* 9670.000	28.53	14.74	43.27	-24.93	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-21
Factor	BBHA 9120D	Temp. / Humidity	26.9°C/50%
Polarity	Vertical	Site / Test Engineer	AC1 / Peter Xu
Test Mode	Transmit by 802.11a at Channel 5180MHz - CDD Mode	Test Voltage	110V/60Hz

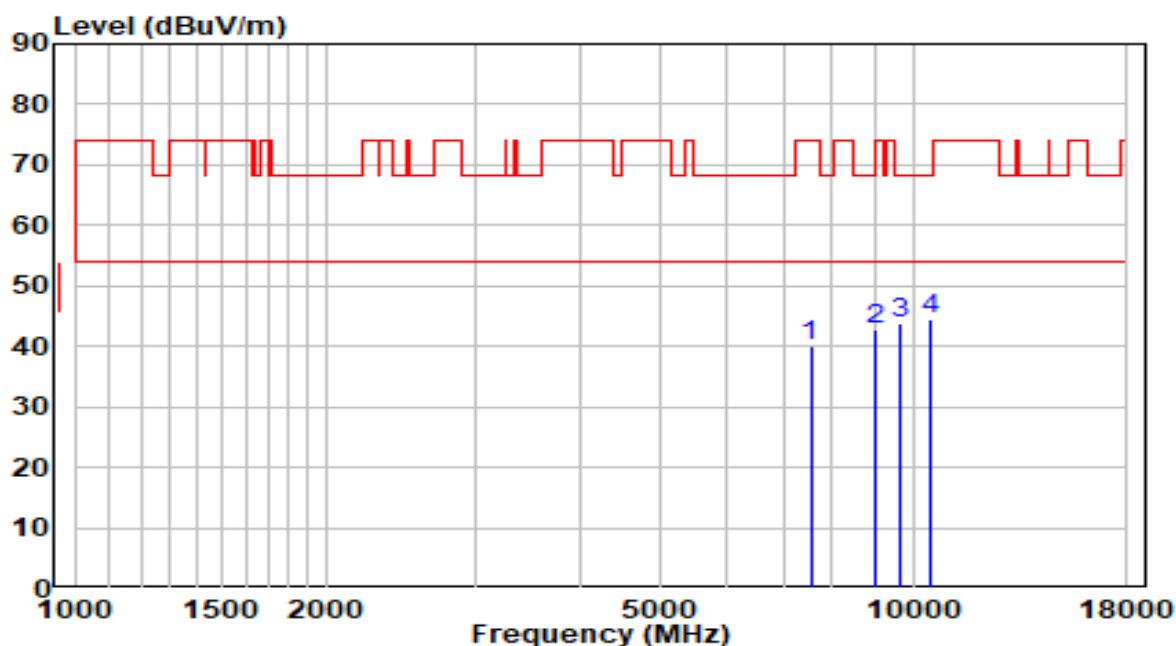


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7545.000	28.30	11.79	40.09	-33.91	74.00	Peak
2	9015.500	29.08	13.70	42.79	-31.21	74.00	Peak
3	9644.500	29.23	14.69	43.92	-24.28	68.20	Peak
4	* 10503.000	27.42	17.07	44.49	-23.71	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-21
Factor	BBHA 9120D	Temp. / Humidity	26.9°C/50%
Polarity	Horizontal	Site / Test Engineer	AC1 / Peter Xu
Test Mode	Transmit by 802.11a at Channel 5220MHz - CDD Mode	Test Voltage	110V/60Hz

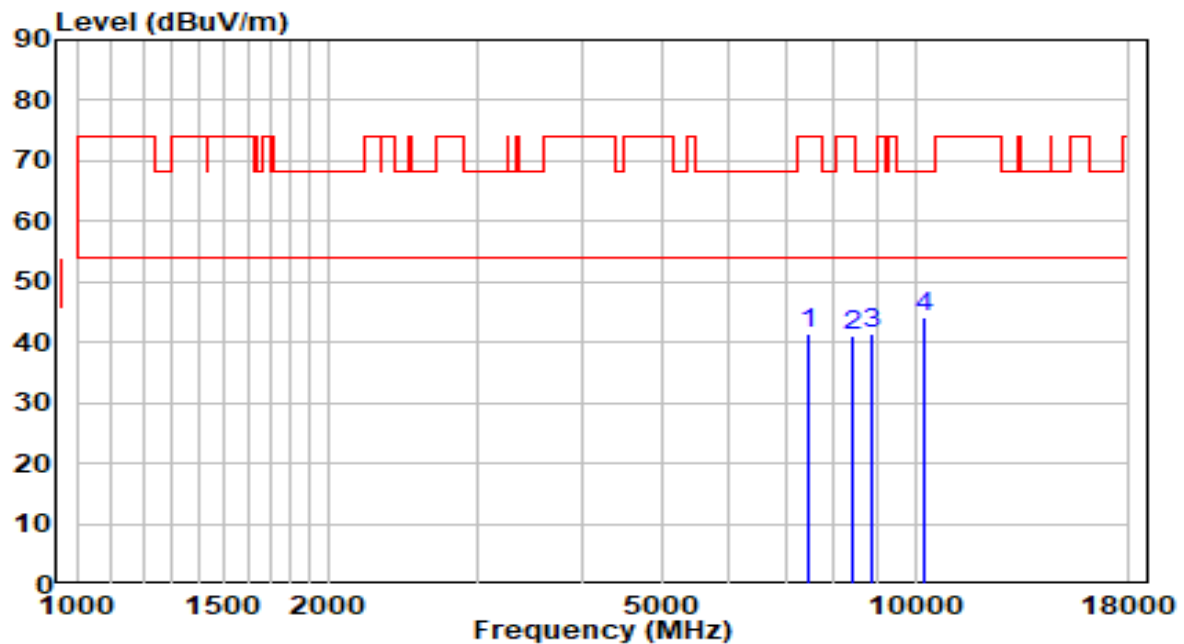


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7477.000	29.71	11.65	41.36	-32.64	74.00	Peak
2	8395.000	28.54	12.47	41.02	-32.98	74.00	Peak
3	8871.000	28.24	13.36	41.60	-26.60	68.20	Peak
4	* 10248.000	27.92	16.21	44.13	-24.07	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-21
Factor	BBHA 9120D	Temp. / Humidity	26.9°C/50%
Polarity	Vertical	Site / Test Engineer	AC1 / Peter Xu
Test Mode	Transmit by 802.11a at Channel 5220MHz - CDD Mode	Test Voltage	110V/60Hz

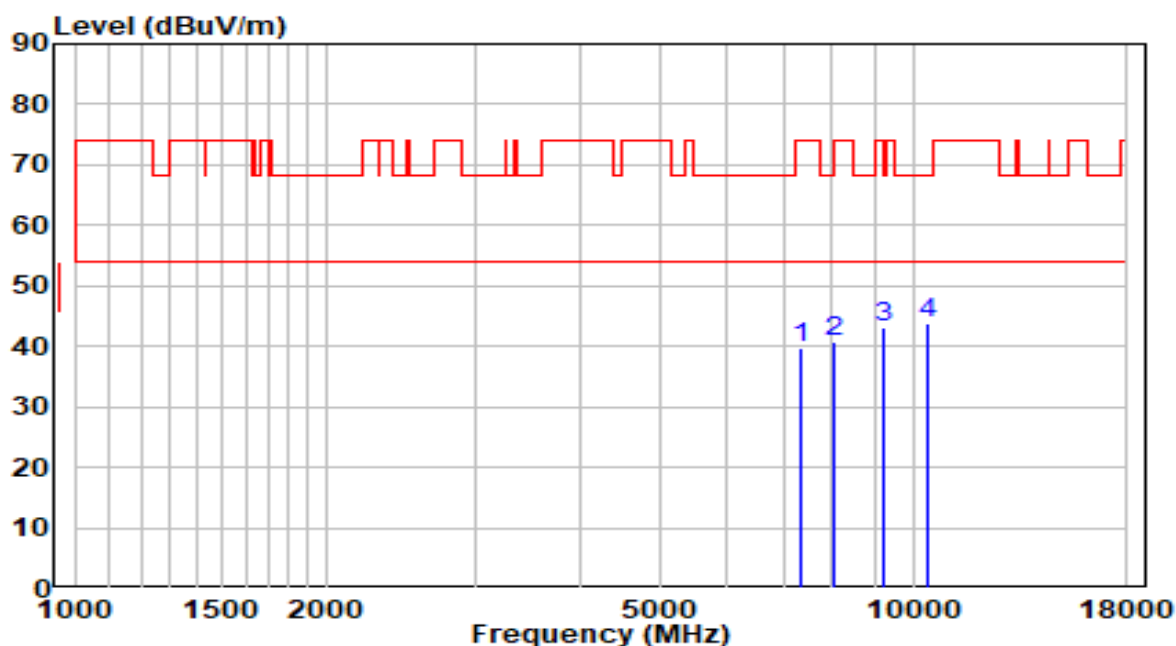


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7332.500	28.55	11.24	39.79	-34.21	74.00	Peak
2	8046.500	28.39	12.52	40.92	-33.08	74.00	Peak
3	9253.500	28.96	14.06	43.01	-25.19	68.20	Peak
4	* 10443.500	26.90	16.88	43.78	-24.42	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-21
Factor	BBHA 9120D	Temp. / Humidity	26.9°C/50%
Polarity	Horizontal	Site / Test Engineer	AC1 / Peter Xu
Test Mode	Transmit by 802.11a at Channel 5240MHz - CDD Mode	Test Voltage	110V/60Hz

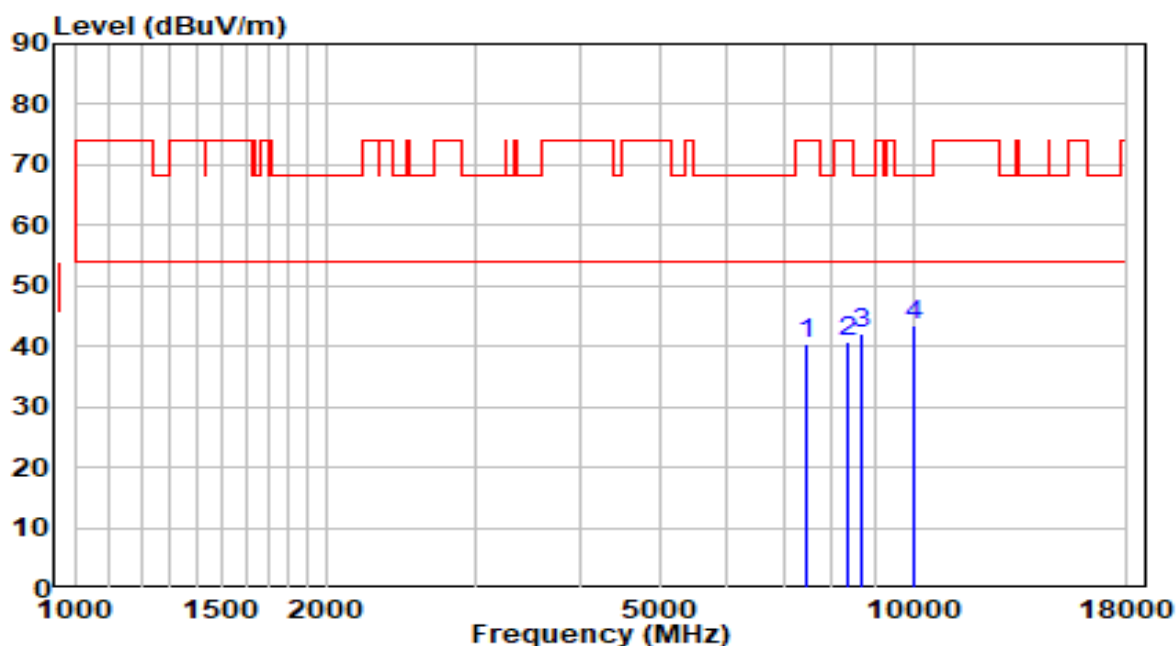


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7434.500	28.93	11.53	40.46	-33.54	74.00	Peak
2	8335.500	28.40	12.48	40.88	-33.12	74.00	Peak
3	8667.000	29.17	12.86	42.03	-26.17	68.20	Peak
4	* 10001.500	28.08	15.37	43.44	-24.76	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-21
Factor	BBHA 9120D	Temp. / Humidity	26.9°C/50%
Polarity	Vertical	Site / Test Engineer	AC1 / Peter Xu
Test Mode	Transmit by 802.11a at Channel 5240MHz - CDD Mode	Test Voltage	110V/60Hz

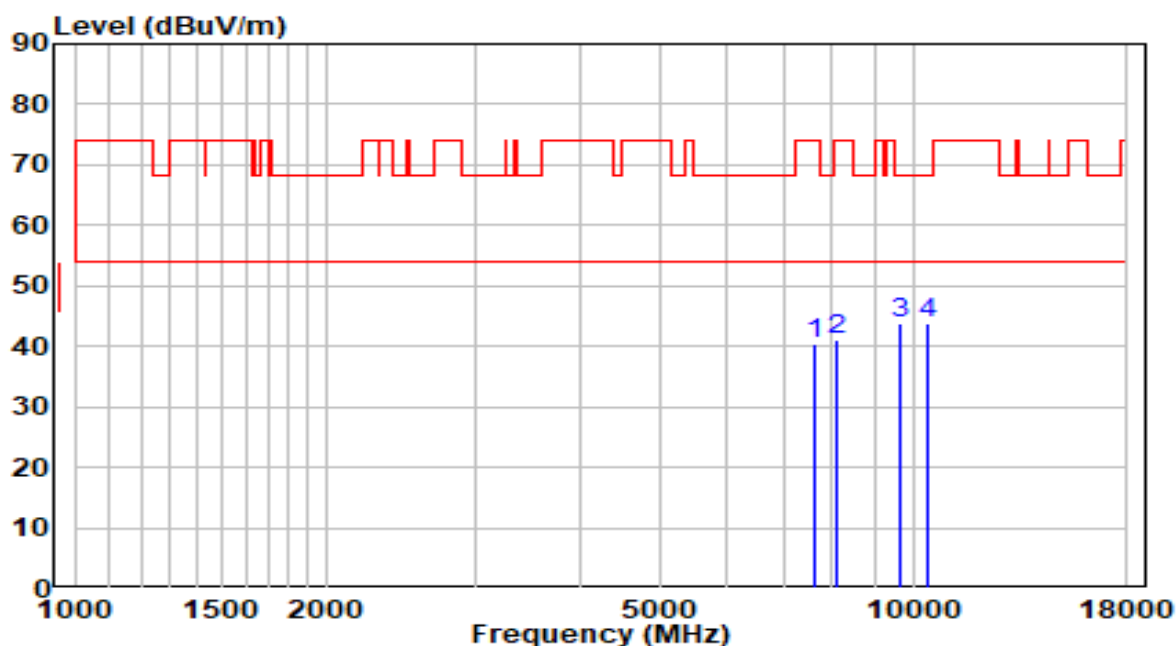


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7630.000	28.54	11.93	40.47	-33.53	74.00	Peak
2	8106.000	28.69	12.51	41.20	-32.80	74.00	Peak
3	9678.500	29.09	14.76	43.85	-24.35	68.20	Peak
4	* 10409.500	27.17	16.76	43.93	-24.27	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-21
Factor	BBHA 9120D	Temp. / Humidity	26.9°C/50%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11a at Channel 5260MHz - CDD Mode	Test Voltage	110V/60Hz

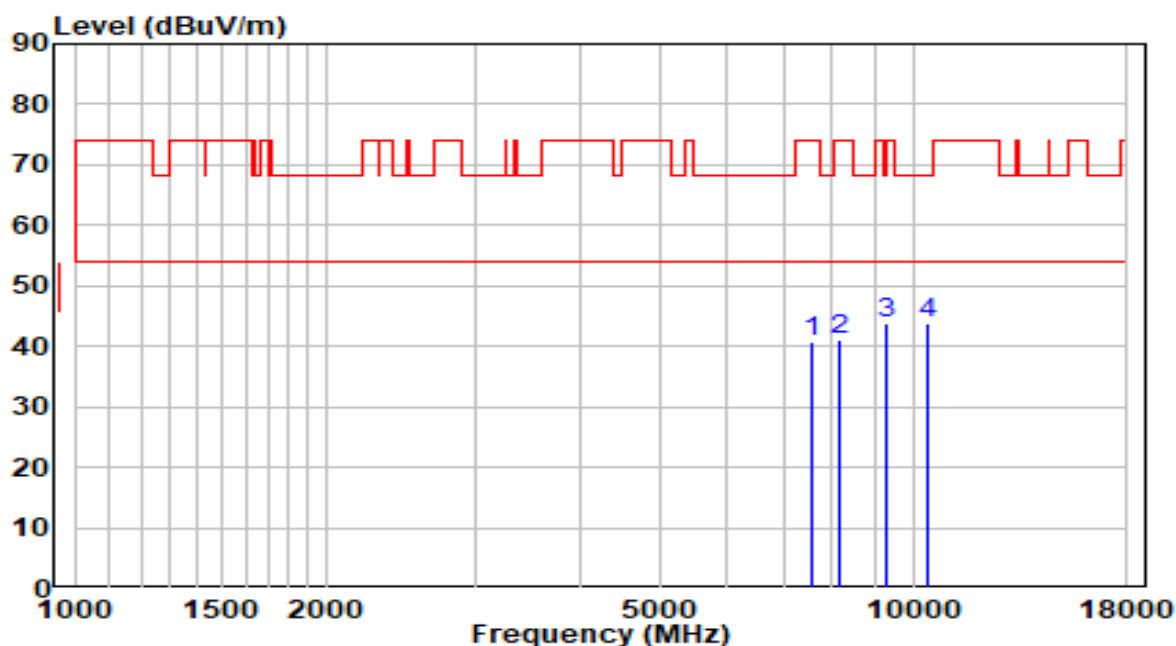


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7570.500	28.91	11.83	40.74	-33.26	74.00	Peak
2	8174.000	28.61	12.50	41.12	-32.88	74.00	Peak
3	9270.500	29.74	14.08	43.82	-24.38	68.20	Peak
4	* 10384.000	27.30	16.67	43.97	-24.23	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-21
Factor	BBHA 9120D	Temp. / Humidity	26.9°C/50%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11a at Channel 5260MHz - CDD Mode	Test Voltage	110V/60Hz

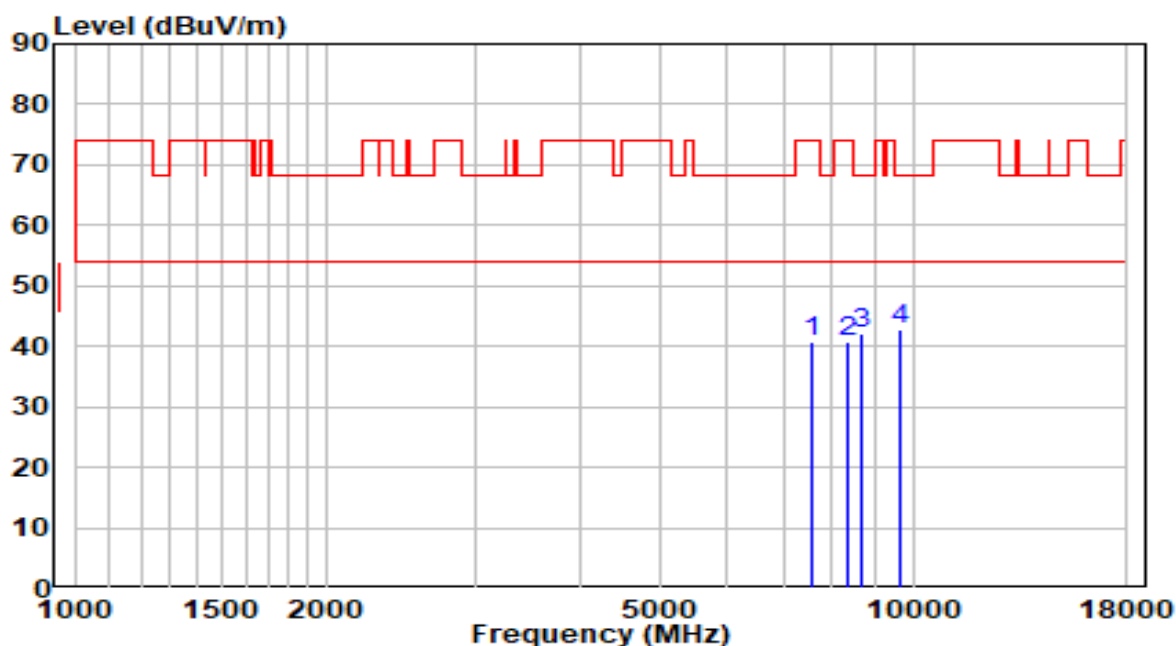


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7562.000	29.01	11.82	40.82	-33.18	74.00	Peak
2	8386.500	28.21	12.47	40.68	-33.32	74.00	Peak
3	8684.000	29.30	12.91	42.21	-25.99	68.20	Peak
4	* 9670.000	28.18	14.74	42.92	-25.28	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-21
Factor	BBHA 9120D	Temp. / Humidity	26.9°C/50%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11a at Channel 5300MHz - CDD Mode	Test Voltage	110V/60Hz

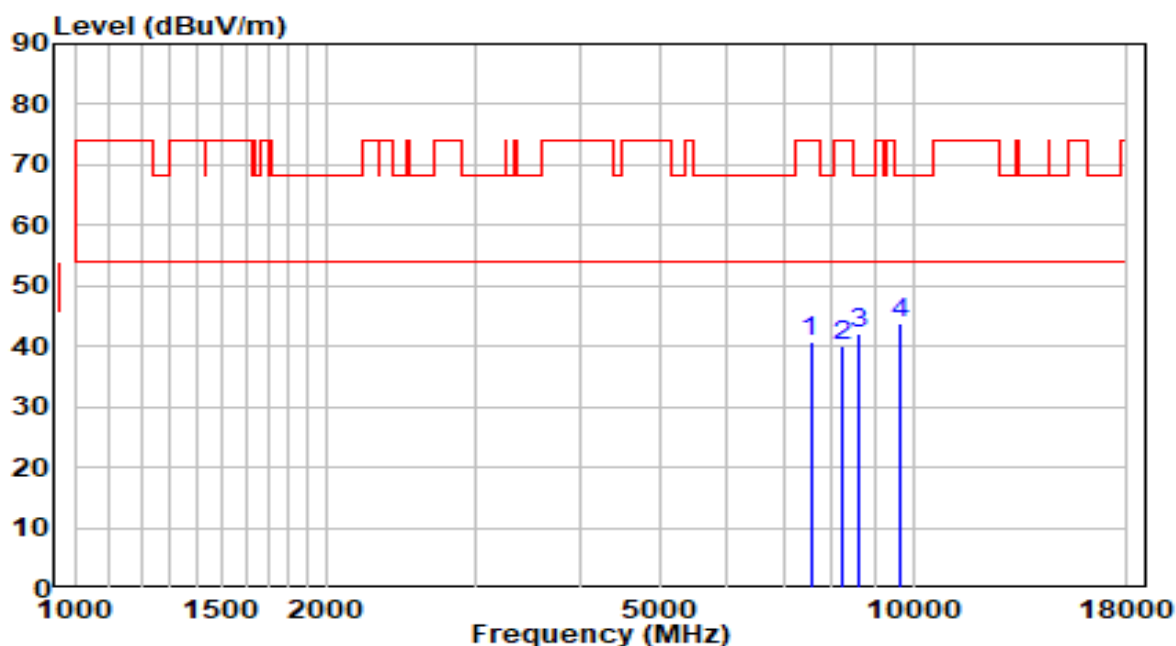


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7545.000	28.81	11.79	40.60	-33.40	74.00	Peak
2	8216.500	27.58	12.50	40.08	-33.92	74.00	Peak
3	8641.500	29.22	12.80	42.02	-26.18	68.20	Peak
4	* 9678.500	28.89	14.76	43.65	-24.55	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-21
Factor	BBHA 9120D	Temp. / Humidity	26.9°C/50%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11a at Channel 5300MHz - CDD Mode	Test Voltage	110V/60Hz

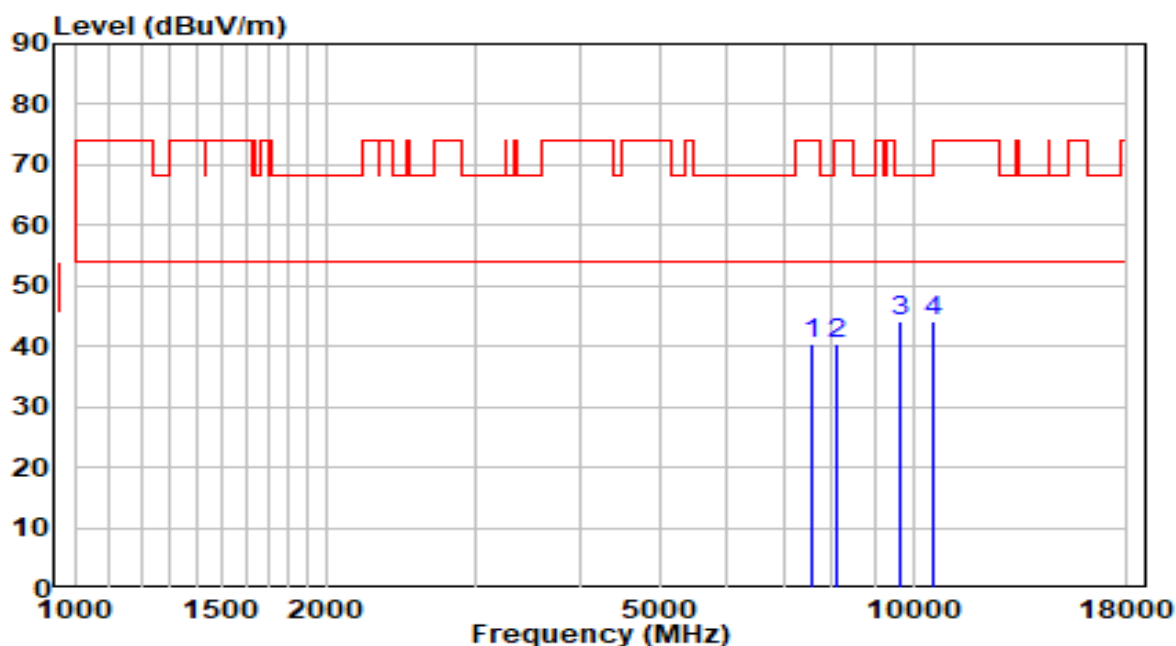


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7579.000	28.51	11.84	40.35	-33.65	74.00	Peak
2	8089.000	27.92	12.52	40.44	-33.56	74.00	Peak
3	9653.000	29.29	14.71	44.00	-24.20	68.20	Peak
4	* 10537.000	27.04	17.12	44.16	-24.04	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-21
Factor	BBHA 9120D	Temp. / Humidity	26.9°C/50%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11a at Channel 5320MHz - CDD Mode	Test Voltage	110V/60Hz

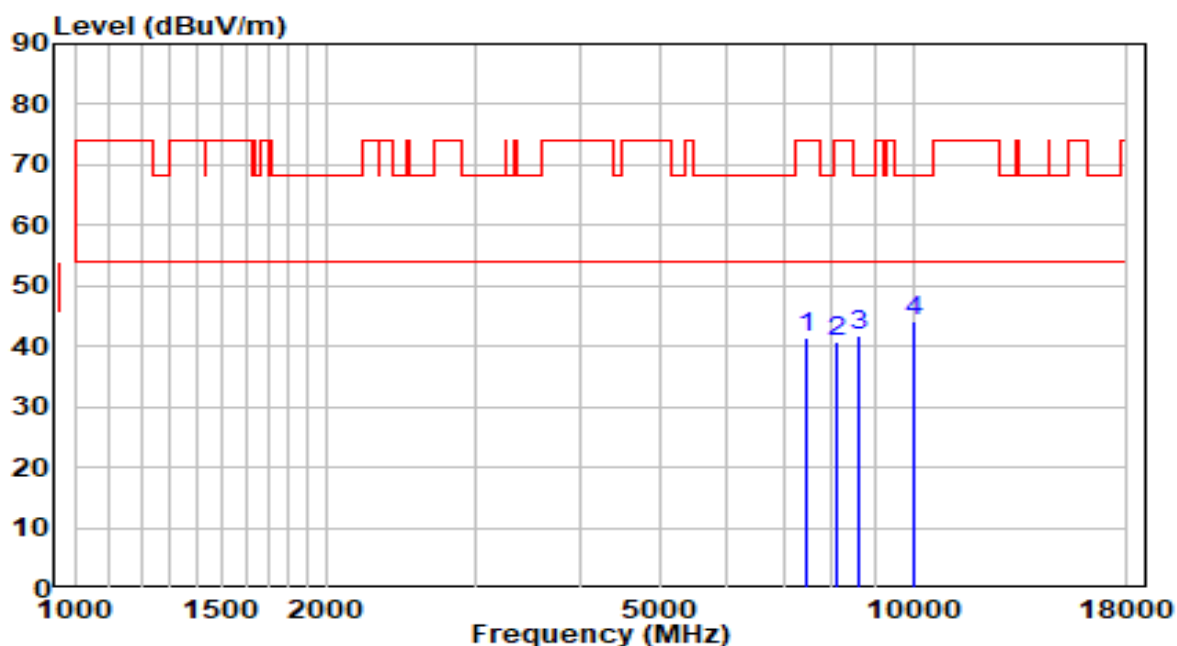


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7477.000	29.71	11.65	41.36	-32.64	74.00	Peak
2	8097.500	28.20	12.52	40.72	-33.28	74.00	Peak
3	8641.500	29.00	12.80	41.80	-26.40	68.20	Peak
4	* 9993.000	28.65	15.35	44.00	-24.20	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-21
Factor	BBHA 9120D	Temp. / Humidity	26.9°C/50%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11a at Channel 5320MHz - CDD Mode	Test Voltage	110V/60Hz

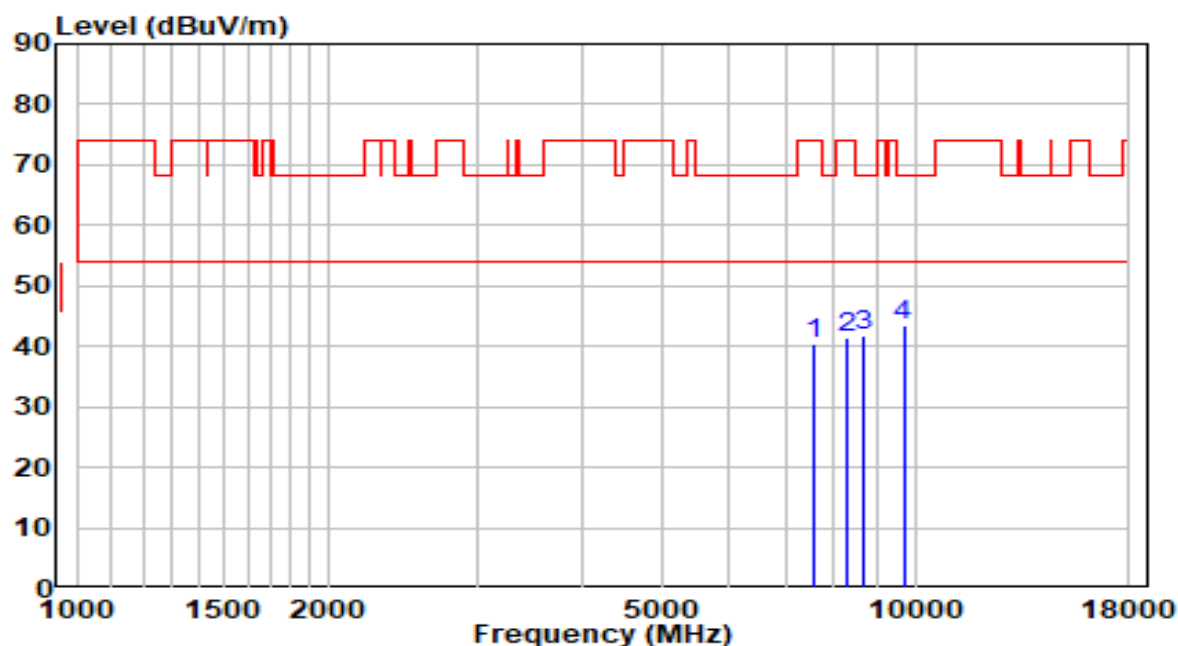


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7570.500	28.69	11.83	40.52	-33.48	74.00	Peak
2	8310.000	28.78	12.48	41.27	-32.73	74.00	Peak
3	8667.000	28.97	12.86	41.84	-26.36	68.20	Peak
4	* 9687.000	28.74	14.77	43.51	-24.69	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-21
Factor	BBHA 9120D	Temp. / Humidity	26.9°C/50%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11a at Channel 5500MHz - CDD Mode	Test Voltage	110V/60Hz

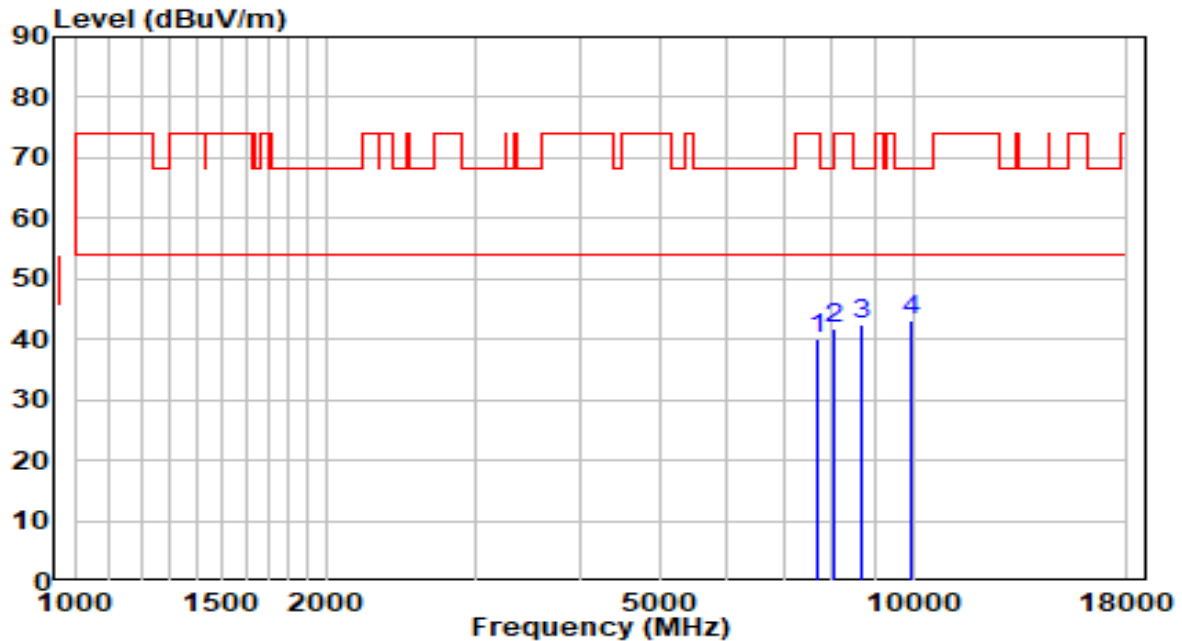


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7664.000	28.25	11.98	40.23	-33.77	74.00	Peak
2	8046.500	29.34	12.52	41.86	-32.14	74.00	Peak
3	8650.000	29.56	12.82	42.38	-25.82	68.20	Peak
4	* 9959.000	27.96	15.28	43.24	-24.96	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-21
Factor	BBHA 9120D	Temp. / Humidity	26.9°C/50%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11a at Channel 5500MHz - CDD Mode	Test Voltage	110V/60Hz

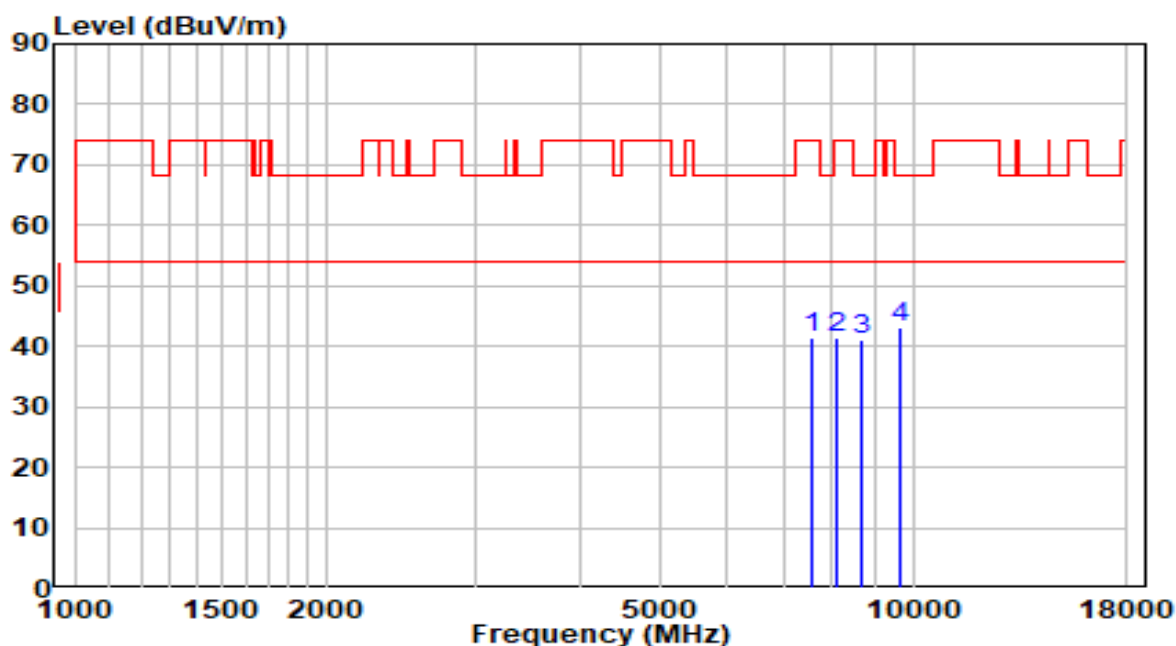


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7553.500	29.68	11.80	41.49	-32.51	74.00	Peak
2	8114.500	28.94	12.51	41.45	-32.55	74.00	Peak
3	8667.000	28.37	12.86	41.24	-26.96	68.20	Peak
4	* 9670.000	28.47	14.74	43.21	-24.99	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-21
Factor	BBHA 9120D	Temp. / Humidity	26.9°C/50%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11a at Channel 5580MHz - CDD Mode	Test Voltage	110V/60Hz

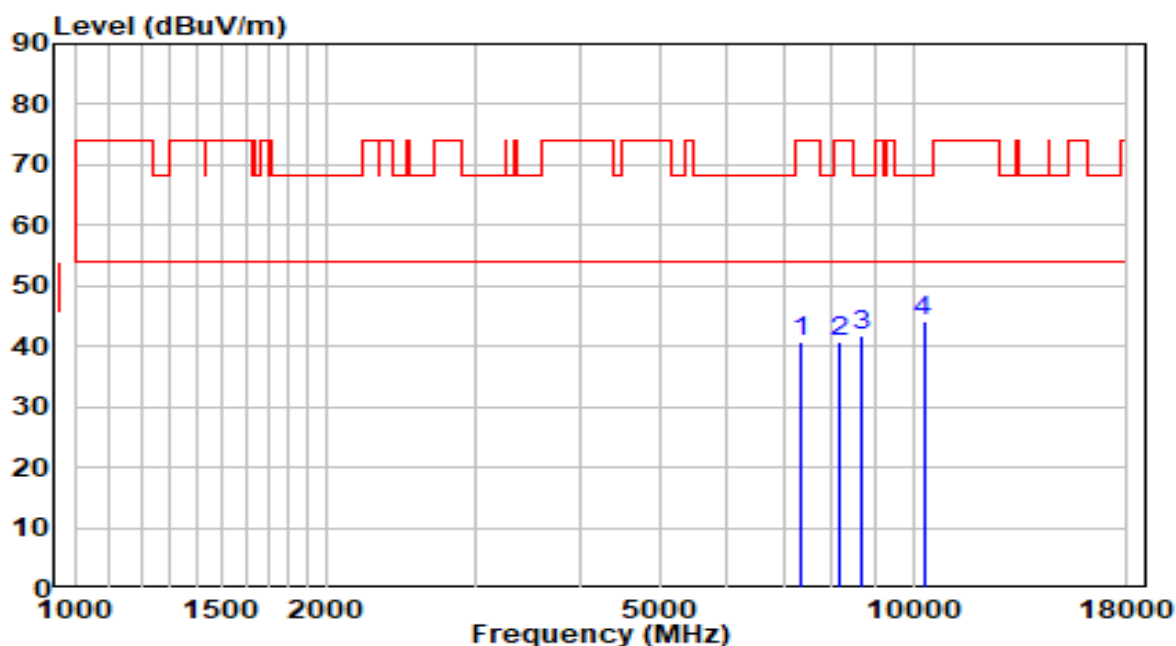


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7341.000	29.47	11.27	40.74	-33.26	74.00	Peak
2	8182.500	28.21	12.50	40.71	-33.29	74.00	Peak
3	8684.000	28.71	12.91	41.62	-26.58	68.20	Peak
4	* 10290.500	27.73	16.35	44.08	-24.12	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-21
Factor	BBHA 9120D	Temp. / Humidity	26.9°C/50%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11a at Channel 5580MHz - CDD Mode	Test Voltage	110V/60Hz

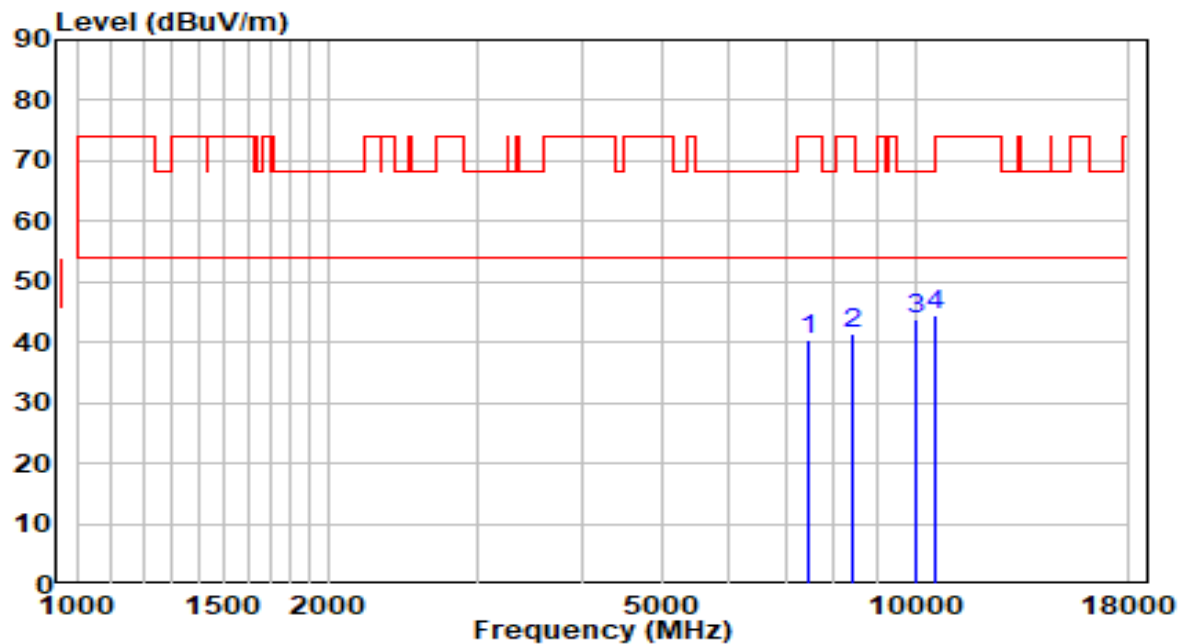


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7443.000	28.97	11.55	40.52	-33.48	74.00	Peak
2	8395.000	28.86	12.47	41.33	-32.67	74.00	Peak
3	10001.500	28.47	15.37	43.84	-24.36	68.20	Peak
4	* 10571.000	27.44	17.17	44.61	-23.59	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-21
Factor	BBHA 9120D	Temp. / Humidity	26.9°C/50%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11a at Channel 5700MHz - CDD Mode	Test Voltage	110V/60Hz

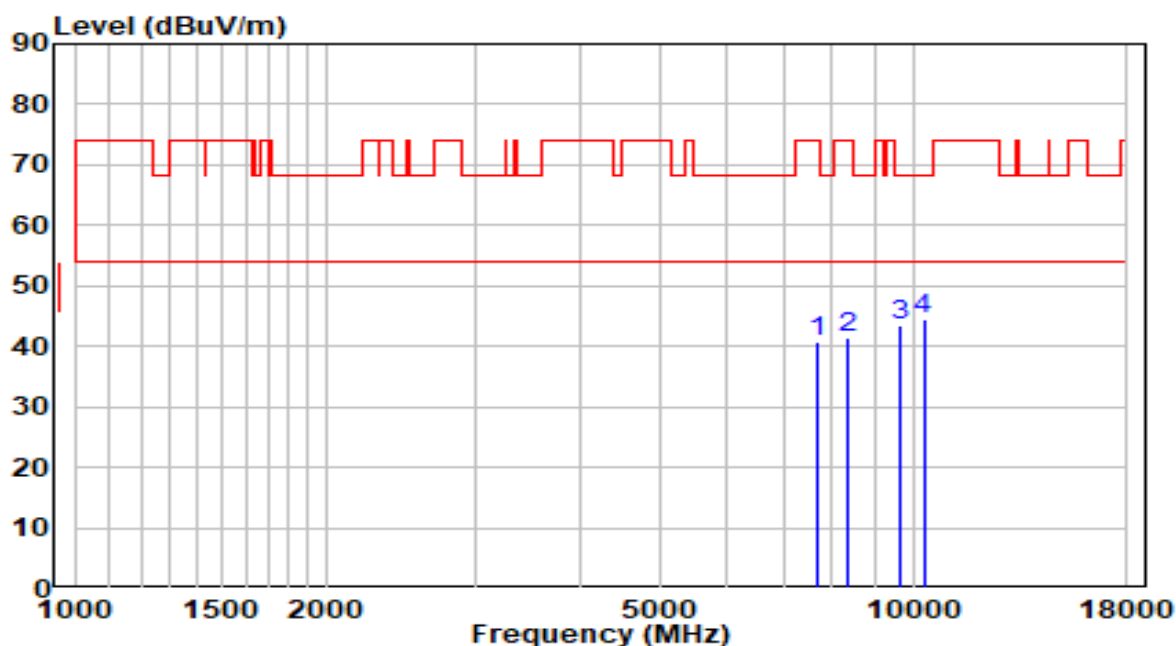


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7706.500	28.59	12.05	40.64	-33.36	74.00	Peak
2	8369.500	28.79	12.47	41.27	-32.73	74.00	Peak
3	9627.500	28.86	14.66	43.52	-24.68	68.20	Peak
4	* 10290.500	28.09	16.35	44.44	-23.76	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-21
Factor	BBHA 9120D	Temp. / Humidity	26.9°C/50%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11a at Channel 5700MHz - CDD Mode	Test Voltage	110V/60Hz

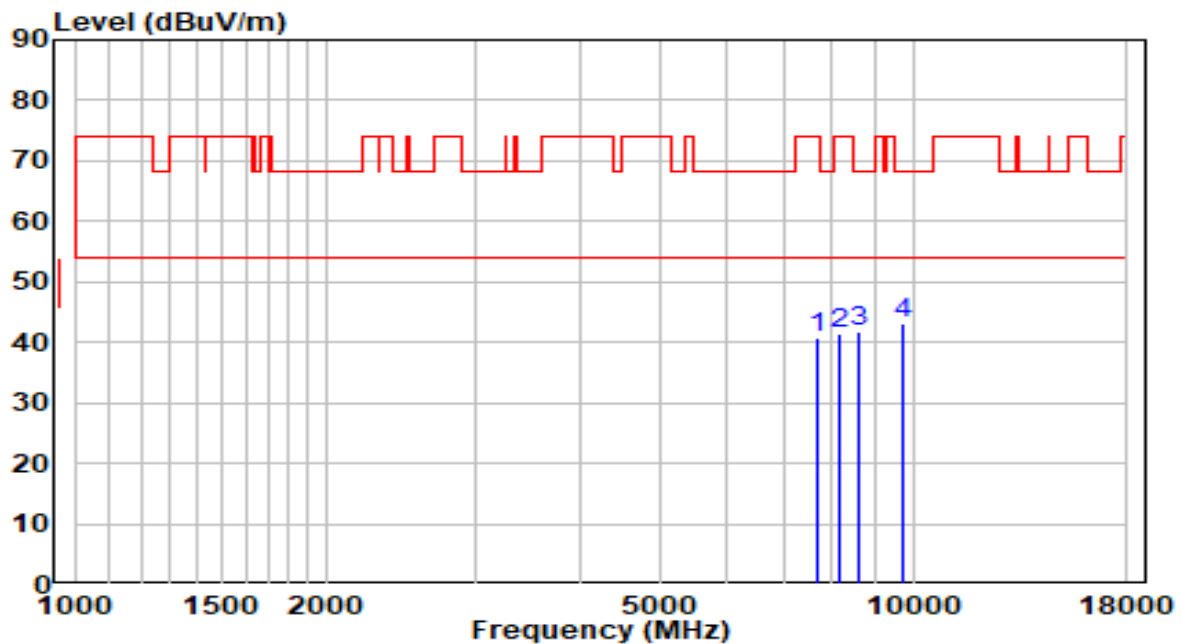


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7715.000	28.61	12.07	40.67	-33.33	74.00	Peak
2	8182.500	28.94	12.50	41.44	-32.56	74.00	Peak
3	8624.500	28.90	12.76	41.66	-26.54	68.20	Peak
4	* 9755.000	28.29	14.90	43.19	-25.01	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-21
Factor	BBHA 9120D	Temp. / Humidity	26.9°C/50%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11a at Channel 5720MHz - CDD Mode	Test Voltage	110V/60Hz

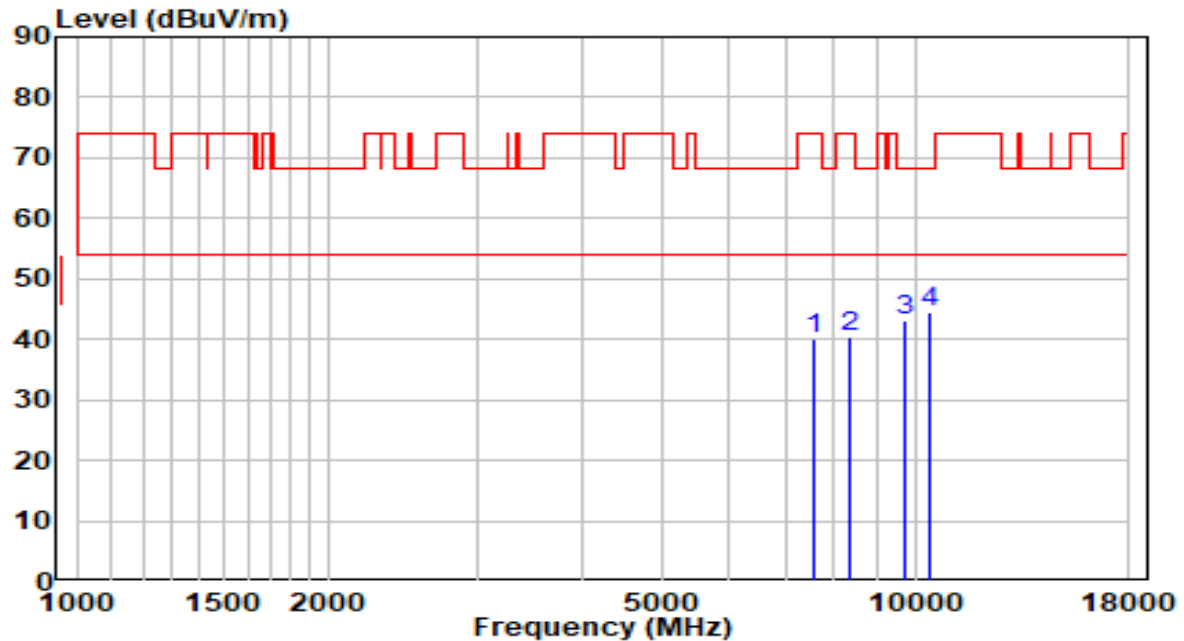


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7596.000	28.37	11.87	40.24	-33.76	74.00	Peak
2	8369.500	28.11	12.47	40.58	-33.42	74.00	Peak
3	9729.500	28.33	14.85	43.18	-25.02	68.20	Peak
4	* 10375.500	27.85	16.64	44.50	-23.70	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-21
Factor	BBHA 9120D	Temp. / Humidity	26.9°C/50%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11a at Channel 5720MHz - CDD Mode	Test Voltage	110V/60Hz

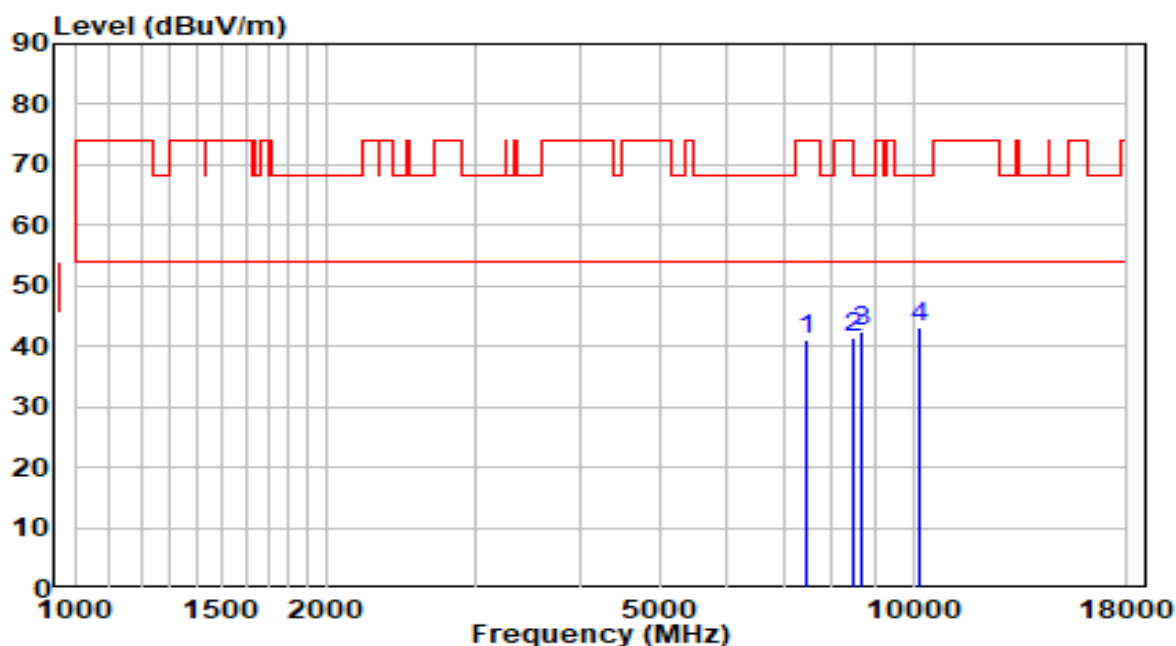


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7485.500	29.52	11.67	41.20	-32.80	74.00	Peak
2	8463.000	28.99	12.46	41.45	-32.55	74.00	Peak
3	8667.000	29.43	12.86	42.30	-25.90	68.20	Peak
4	* 10205.500	27.22	16.06	43.29	-24.91	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-21
Factor	BBHA 9120D	Temp. / Humidity	26.9°C/50%
Polarity	Horizontal	Site / Test Engineer	AC1 / Peter Xu
Test Mode	Transmit by 802.11a at Channel 5745MHz - CDD Mode	Test Voltage	110V/60Hz

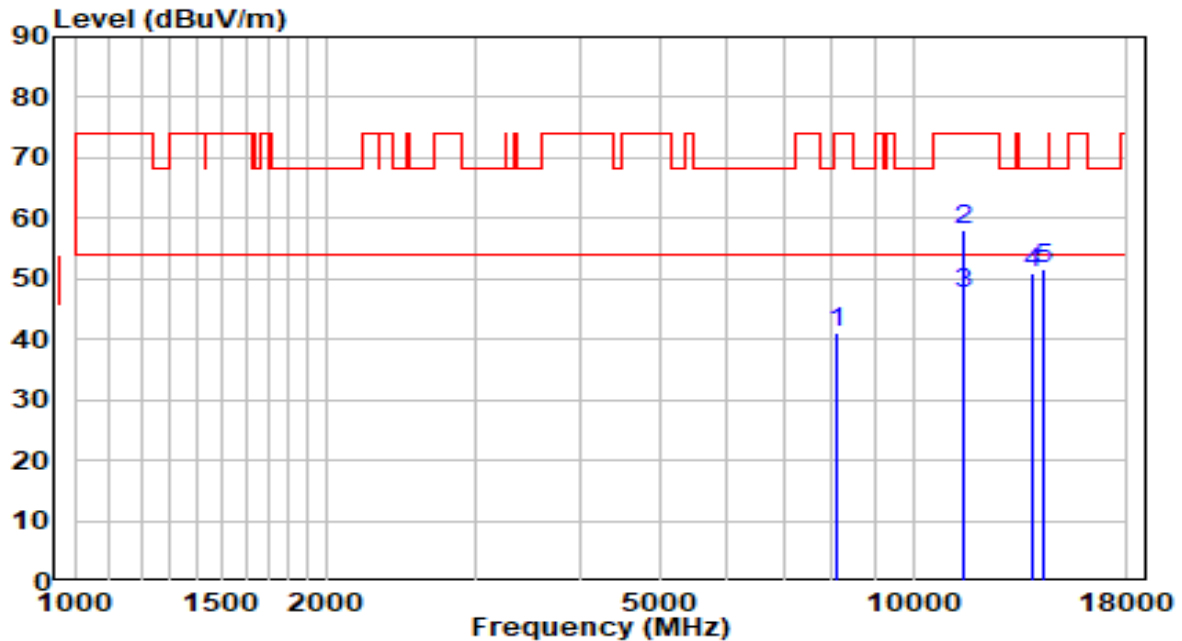


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	8097.500	28.52	12.52	41.03	-32.97	74.00	Peak
2	11489.000	39.55	18.44	57.98	-16.02	74.00	Peak
3	* 11491.280	29.20	18.44	47.63	-6.37	54.00	Average
4	13928.500	29.65	21.38	51.03	-17.17	68.20	Peak
5	14277.000	30.14	21.43	51.57	-16.63	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-21
Factor	BBHA 9120D	Temp. / Humidity	26.9°C/50%
Polarity	Vertical	Site / Test Engineer	AC1 / Peter Xu
Test Mode	Transmit by 802.11a at Channel 5745MHz - CDD Mode	Test Voltage	110V/60Hz

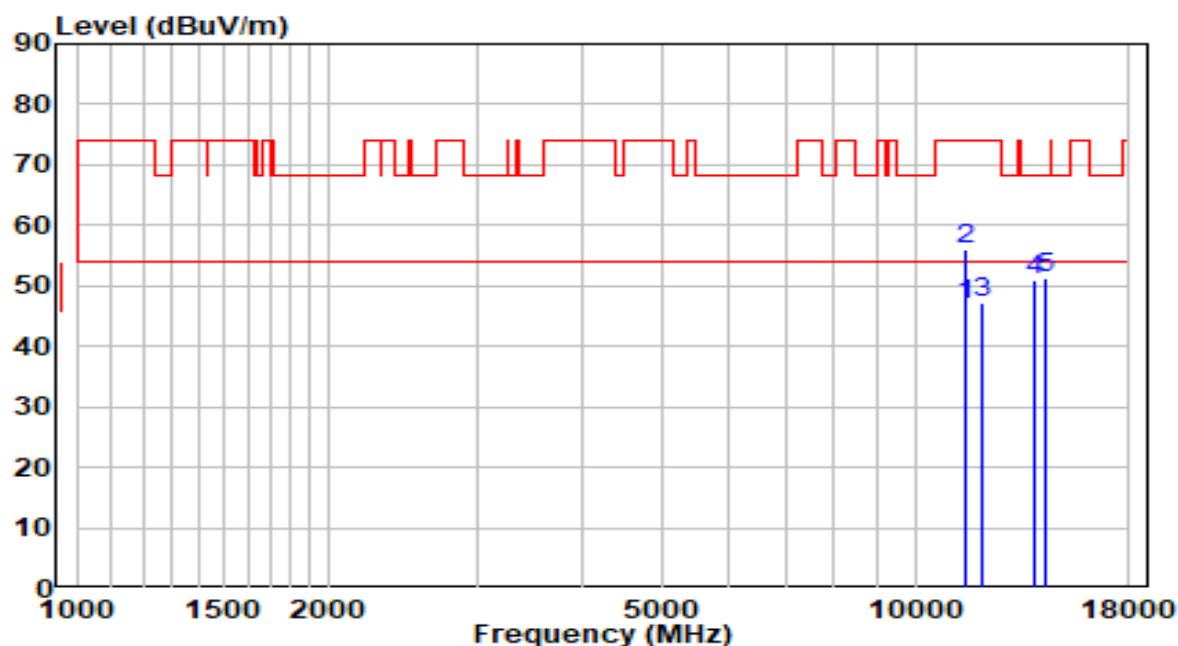


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	11486.250	28.33	18.43	46.76	-7.24	54.00	Average
2		11489.000	37.50	18.44	55.94	-18.06	74.00	Peak
3		11999.000	29.48	17.82	47.30	-26.70	74.00	Peak
4		13860.500	29.77	21.25	51.02	-17.18	68.20	Peak
5		14302.500	29.76	21.42	51.18	-17.02	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-21
Factor	BBHA 9120D	Temp. / Humidity	26.9°C/50%
Polarity	Horizontal	Site / Test Engineer	AC1 / Peter Xu
Test Mode	Transmit by 802.11a at Channel 5785MHz - CDD Mode	Test Voltage	110V/60Hz

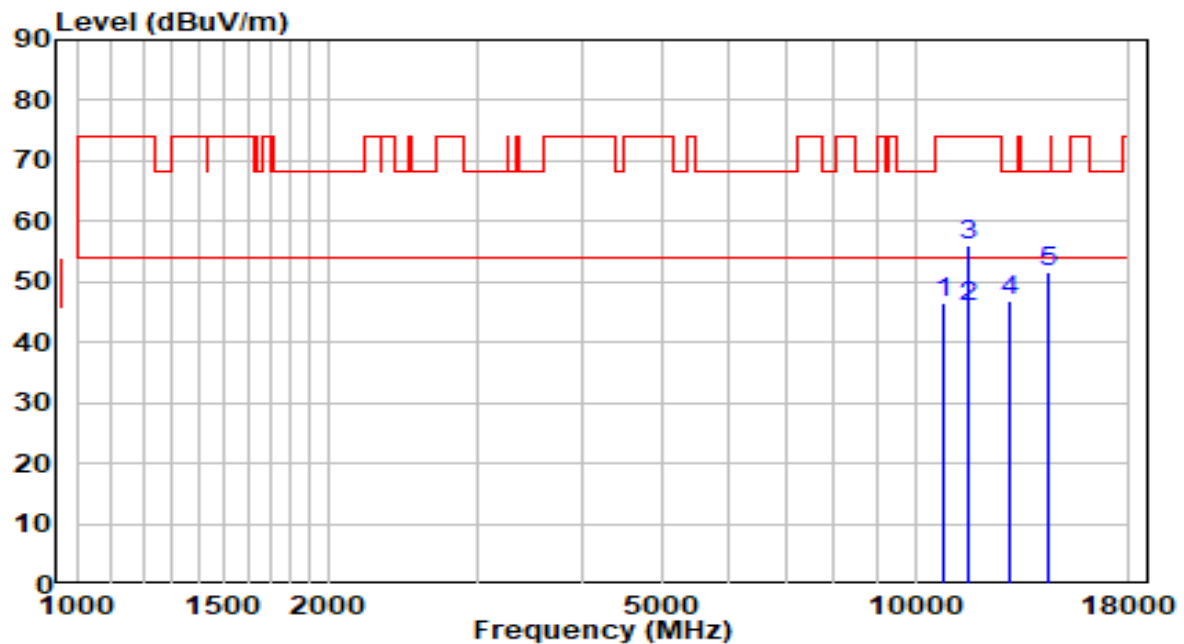


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	10834.500	29.14	17.54	46.68	-27.32	74.00	Peak
2	* 11572.030	27.38	18.36	45.74	-8.26	54.00	Average
3	11574.000	37.51	18.36	55.87	-18.13	74.00	Peak
4	12976.500	27.73	19.22	46.96	-21.24	68.20	Peak
5	14370.500	30.07	21.40	51.47	-16.73	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-21
Factor	BBHA 9120D	Temp. / Humidity	26.9°C/50%
Polarity	Vertical	Site / Test Engineer	AC1 / Peter Xu
Test Mode	Transmit by 802.11a at Channel 5825MHz - CDD Mode	Test Voltage	110V/60Hz

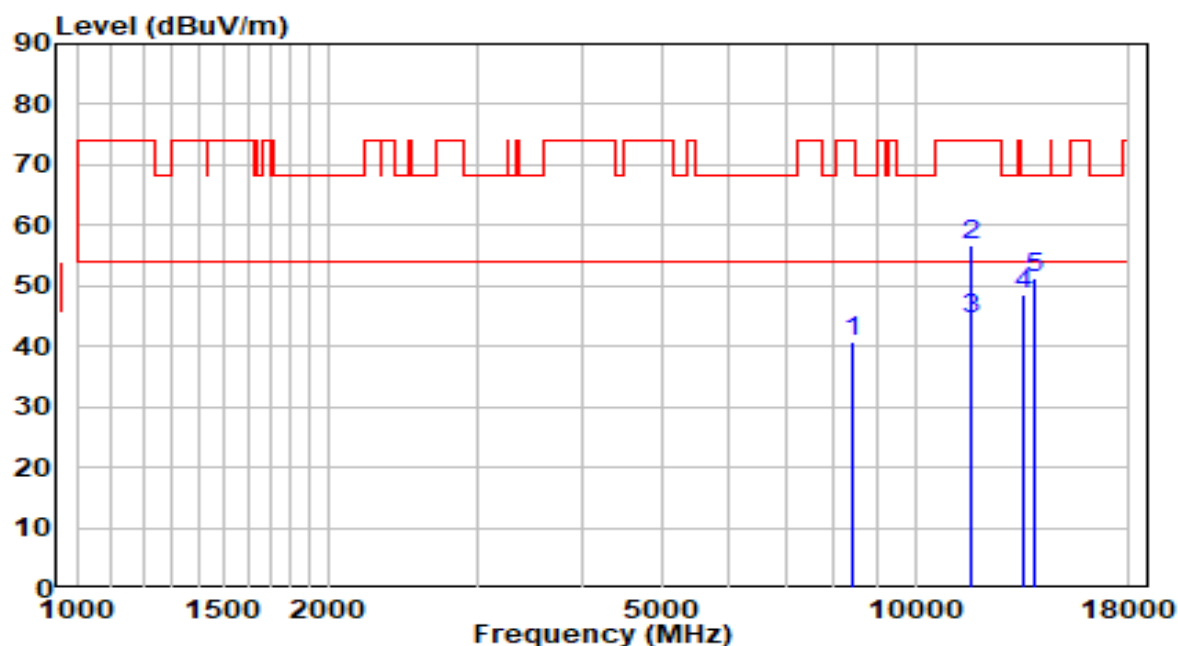


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	8429.000	28.43	12.47	40.90	-33.10	74.00	Peak
2	11650.500	38.53	18.26	56.79	-17.21	74.00	Peak
3	* 11654.720	26.30	18.26	44.55	-9.45	54.00	Average
4	13478.000	28.23	20.50	48.73	-19.47	68.20	Peak
5	13928.500	30.06	21.38	51.44	-16.76	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-21
Factor	BBHA 9120D	Temp. / Humidity	26.9°C/50%
Polarity	Horizontal	Site / Test Engineer	AC1 / Peter Xu
Test Mode	Transmit by 802.11ac-VHT20 at Channel 5180MHz - CDD Mode	Test Voltage	110V/60Hz

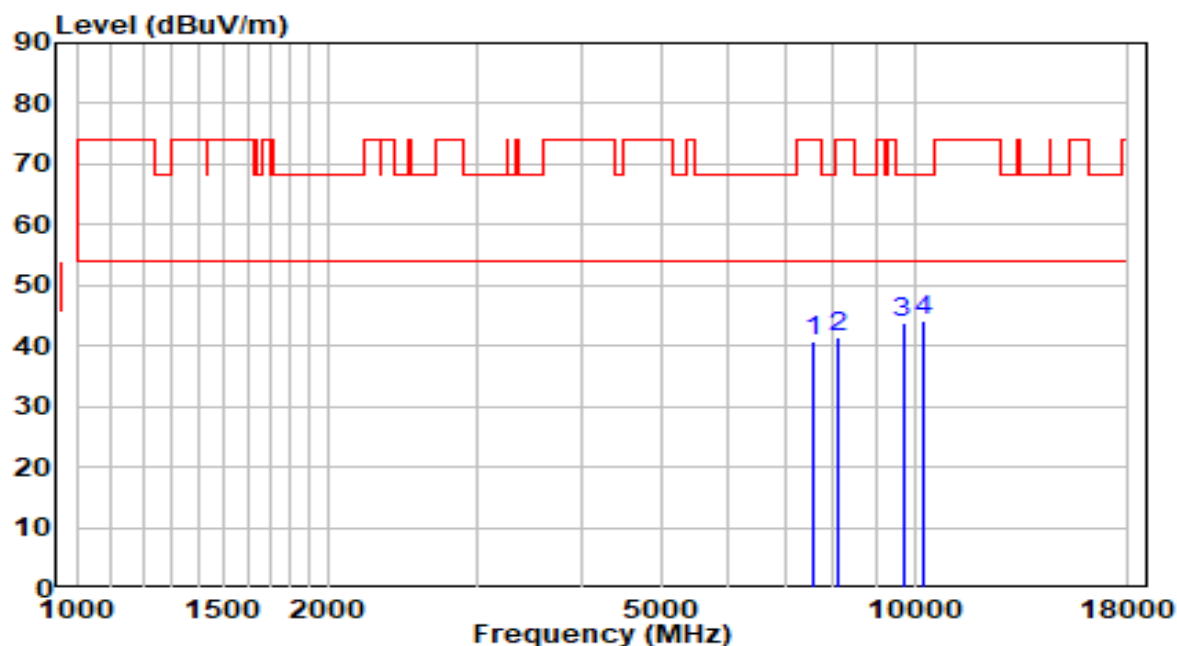


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7553.500	32.52	8.17	40.69	-33.31	74.00	Peak
2	8097.500	32.38	8.99	41.37	-32.63	74.00	Peak
3	9687.000	33.06	10.72	43.77	-24.43	68.20	Peak
4	* 10239.500	32.43	11.76	44.19	-24.01	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-21
Factor	BBHA 9120D	Temp. / Humidity	26.9°C/50%
Polarity	Vertical	Site / Test Engineer	AC1 / Peter Xu
Test Mode	Transmit by 802.11ac-VHT20 at Channel 5180MHz - CDD Mode	Test Voltage	110V/60Hz

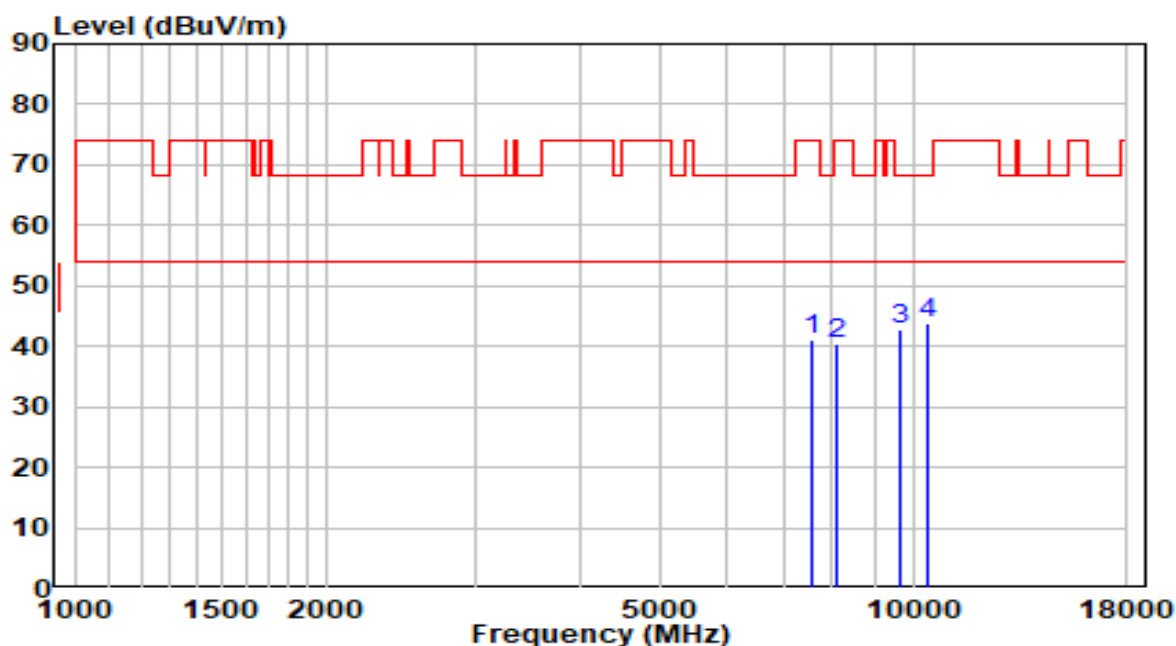


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	7553.500	29.15	11.80	40.95	-33.05	74.00	Peak
2	8097.500	27.95	12.52	40.47	-33.53	74.00	Peak
3	9636.000	28.25	14.68	42.93	-25.27	68.20	Peak
4	* 10443.500	27.03	16.88	43.91	-24.29	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-21
Factor	BBHA 9120D	Temp. / Humidity	26.9°C/50%
Polarity	Horizontal	Site / Test Engineer	AC1 / Peter Xu
Test Mode	Transmit by 802.11ac-VHT20 at Channel 5220MHz - CDD Mode	Test Voltage	110V/60Hz

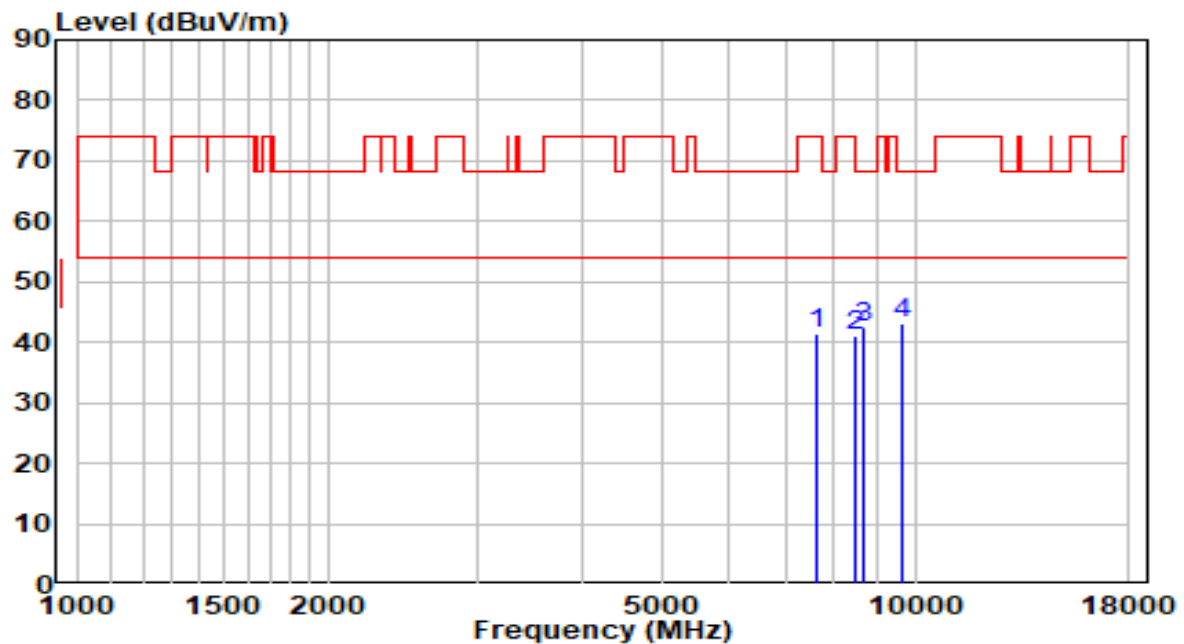


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7647.000	29.35	11.95	41.31	-32.69	74.00	Peak
2	8454.500	28.51	12.46	40.97	-33.03	74.00	Peak
3	8658.500	29.72	12.84	42.57	-25.63	68.20	Peak
4	* 9661.500	28.51	14.72	43.23	-24.97	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-21
Factor	BBHA 9120D	Temp. / Humidity	26.9°C/50%
Polarity	Vertical	Site / Test Engineer	AC1 / Peter Xu
Test Mode	Transmit by 802.11ac-VHT20 at Channel 5220MHz - CDD Mode	Test Voltage	110V/60Hz

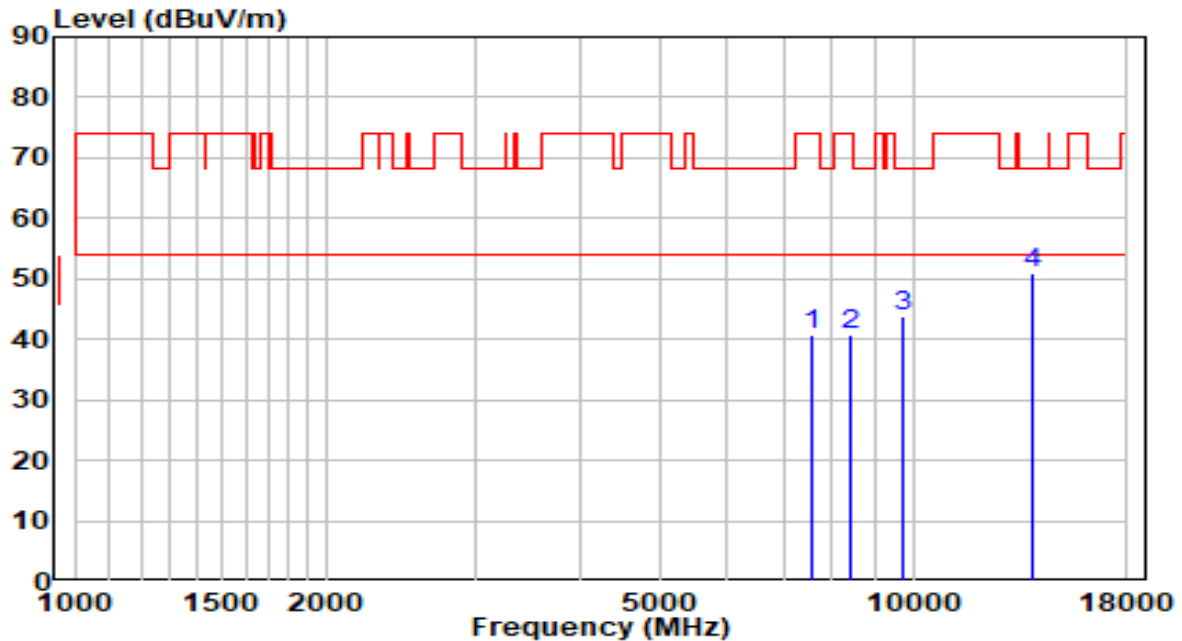


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7562.000	28.87	11.82	40.69	-33.31	74.00	Peak
2	8395.000	28.33	12.47	40.80	-33.20	74.00	Peak
3	9755.000	28.98	14.90	43.88	-24.32	68.20	Peak
4	* 13869.000	29.82	21.27	51.09	-17.11	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-21
Factor	BBHA 9120D	Temp. / Humidity	26.9°C/50%
Polarity	Horizontal	Site / Test Engineer	AC1 / Peter Xu
Test Mode	Transmit by 802.11ac-VHT20 at Channel 5240MHz - CDD Mode	Test Voltage	110V/60Hz

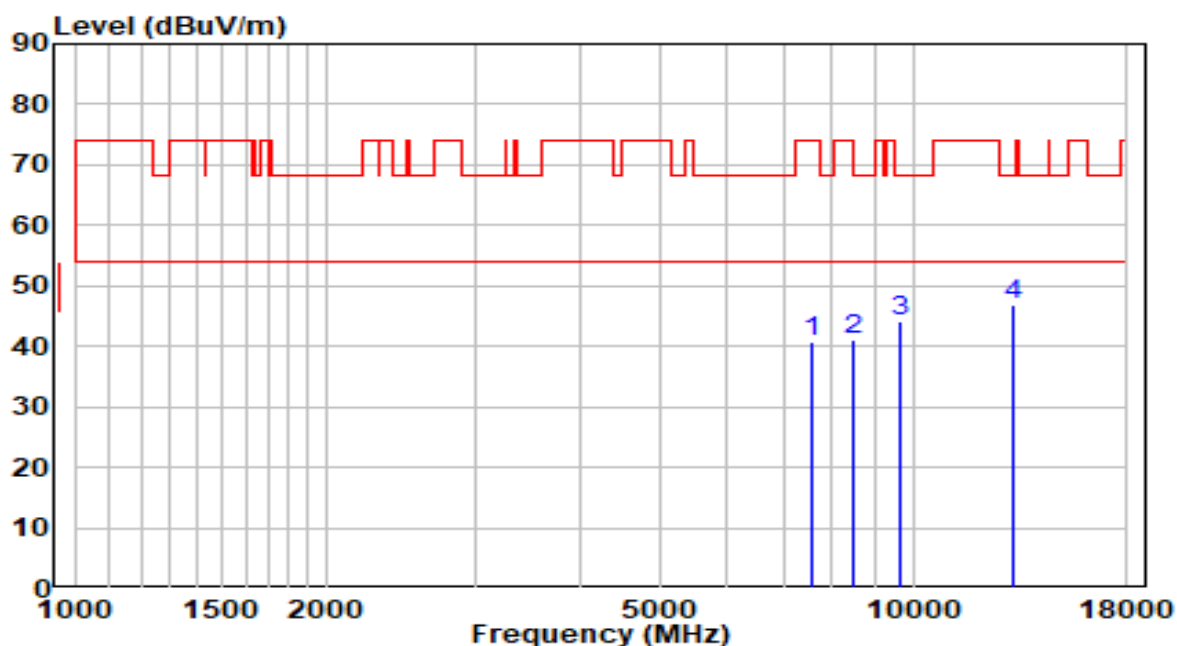


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7562.000	28.92	11.82	40.74	-33.26	74.00	Peak
2	8454.500	28.60	12.46	41.06	-32.94	74.00	Peak
3	9627.500	29.33	14.66	43.99	-24.21	68.20	Peak
4	* 13138.000	27.06	19.64	46.70	-21.50	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-21
Factor	BBHA 9120D	Temp. / Humidity	26.9°C/50%
Polarity	Vertical	Site / Test Engineer	AC1 / Peter Xu
Test Mode	Transmit by 802.11ac-VHT20 at Channel 5240MHz - CDD Mode	Test Voltage	110V/60Hz

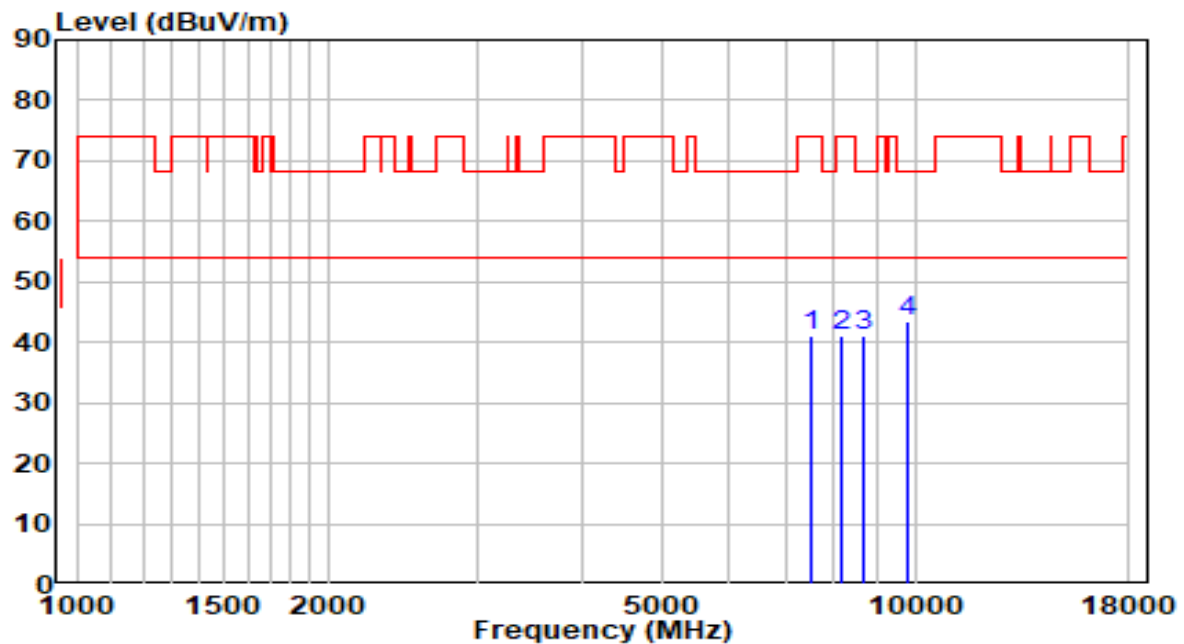


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7536.500	29.31	11.77	41.09	-32.91	74.00	Peak
2	8140.000	28.51	12.51	41.02	-32.98	74.00	Peak
3	8684.000	28.08	12.91	40.98	-27.22	68.20	Peak
4	* 9763.500	28.40	14.92	43.31	-24.89	68.20	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
- Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-21
Factor	BBHA 9120D	Temp. / Humidity	26.9°C/50%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT20 at Channel 5260MHz - CDD Mode	Test Voltage	110V/60Hz

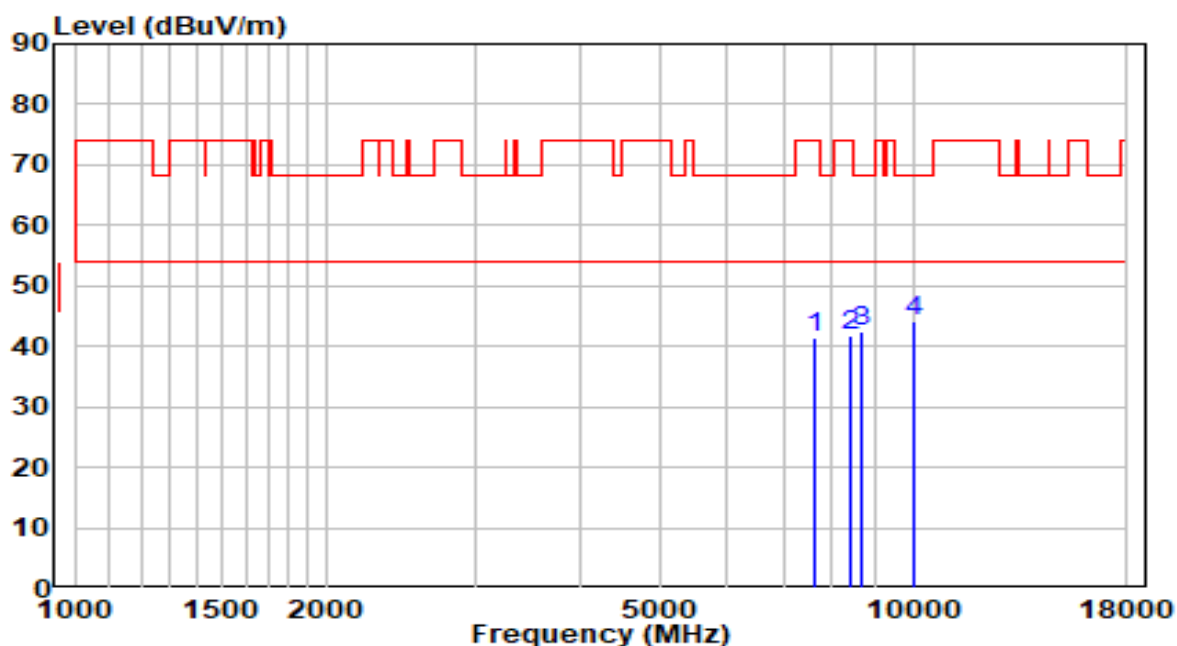


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7630.000	29.61	11.93	41.53	-32.47	74.00	Peak
2	8403.500	29.15	12.47	41.62	-32.38	74.00	Peak
3	8692.500	29.69	12.93	42.61	-25.59	68.20	Peak
4	* 10010.000	28.72	15.39	44.11	-24.09	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-21
Factor	BBHA 9120D	Temp. / Humidity	26.9°C/50%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT20 at Channel 5260MHz - CDD Mode	Test Voltage	110V/60Hz

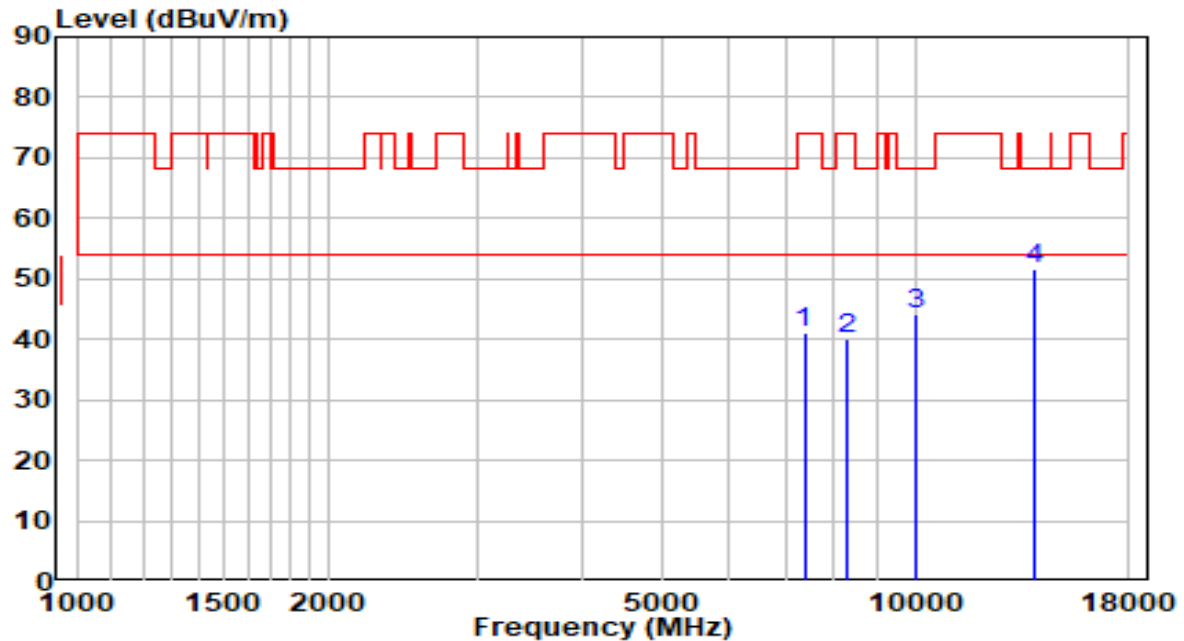


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7375.000	29.58	11.36	40.94	-33.06	74.00	Peak
2	8310.000	27.76	12.48	40.24	-33.76	74.00	Peak
3	10052.500	28.51	15.54	44.05	-24.15	68.20	Peak
4	* 13860.500	30.52	21.25	51.77	-16.43	68.20	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
- Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-21
Factor	BBHA 9120D	Temp. / Humidity	26.9°C/50%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT20 at Channel 5300MHz - CDD Mode	Test Voltage	110V/60Hz

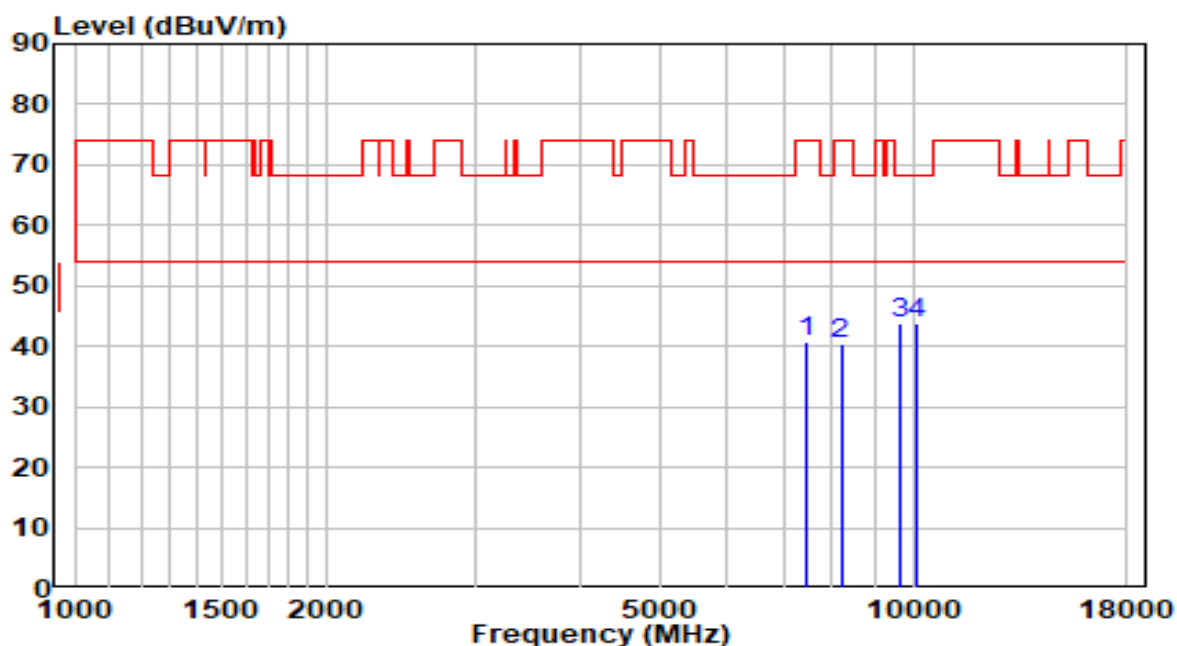


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7485.500	29.01	11.67	40.68	-33.32	74.00	Peak
2	8199.500	27.91	12.50	40.41	-33.59	74.00	Peak
3	9653.000	29.00	14.71	43.71	-24.49	68.20	Peak
4	* 10120.500	28.14	15.77	43.91	-24.29	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-21
Factor	BBHA 9120D	Temp. / Humidity	26.9°C/50%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT20 at Channel 5300MHz - CDD Mode	Test Voltage	110V/60Hz

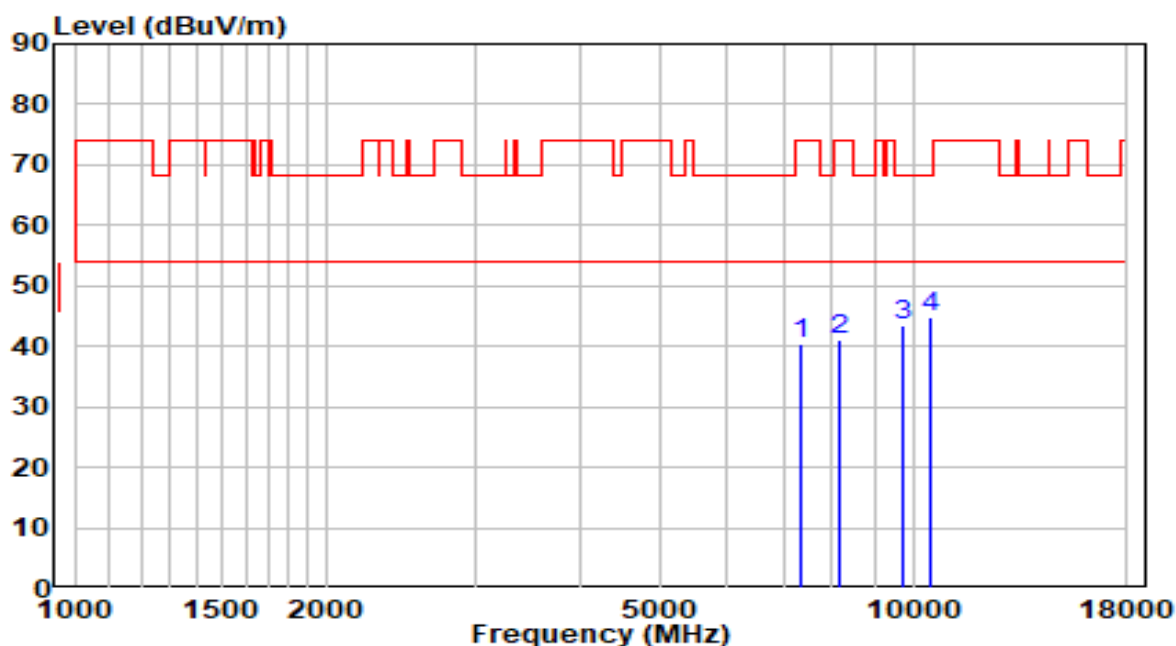


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7366.500	29.11	11.34	40.45	-33.55	74.00	Peak
2	8191.000	28.61	12.50	41.11	-32.89	74.00	Peak
3	9729.500	28.71	14.85	43.57	-24.63	68.20	Peak
4	* 10469.000	27.72	16.96	44.68	-23.52	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-21
Factor	BBHA 9120D	Temp. / Humidity	26.9°C/50%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT20 at Channel 5320MHz - CDD Mode	Test Voltage	110V/60Hz

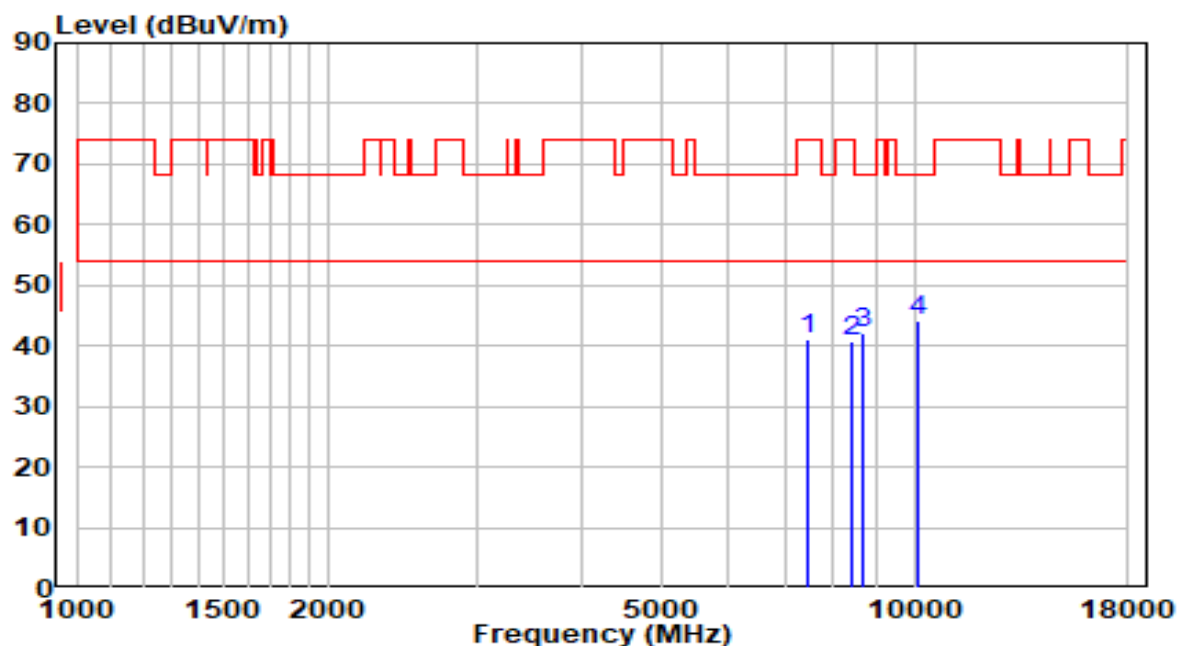


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7477.000	32.86	8.18	41.04	-32.96	74.00	Peak
2	8446.000	32.13	8.73	40.86	-33.14	74.00	Peak
3	8684.000	32.43	9.59	42.02	-26.18	68.20	Peak
4	* 10120.500	32.99	11.16	44.15	-24.05	68.20	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
- Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-21
Factor	BBHA 9120D	Temp. / Humidity	26.9°C/50%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT20 at Channel 5320MHz - CDD Mode	Test Voltage	110V/60Hz

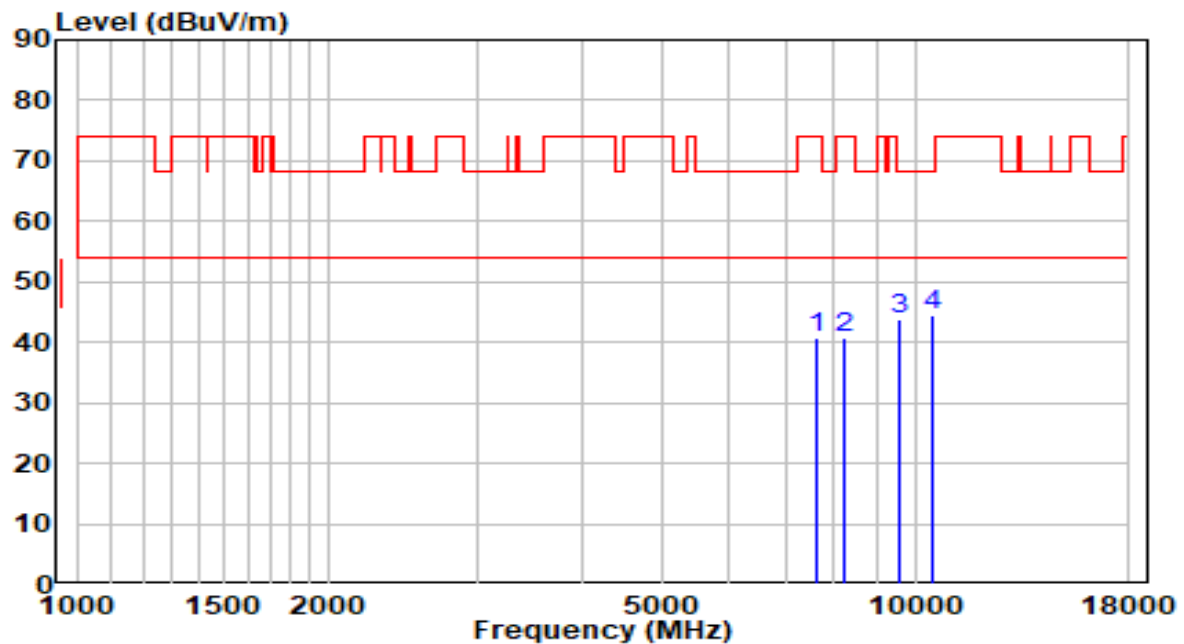


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7638.500	28.77	11.94	40.71	-33.29	74.00	Peak
2	8225.000	28.17	12.50	40.67	-33.33	74.00	Peak
3	9610.500	29.13	14.63	43.76	-24.44	68.20	Peak
4	* 10511.500	27.41	17.09	44.49	-23.71	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-21
Factor	BBHA 9120D	Temp. / Humidity	26.9°C/50%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT20 at Channel 5500MHz - CDD Mode	Test Voltage	110V/60Hz

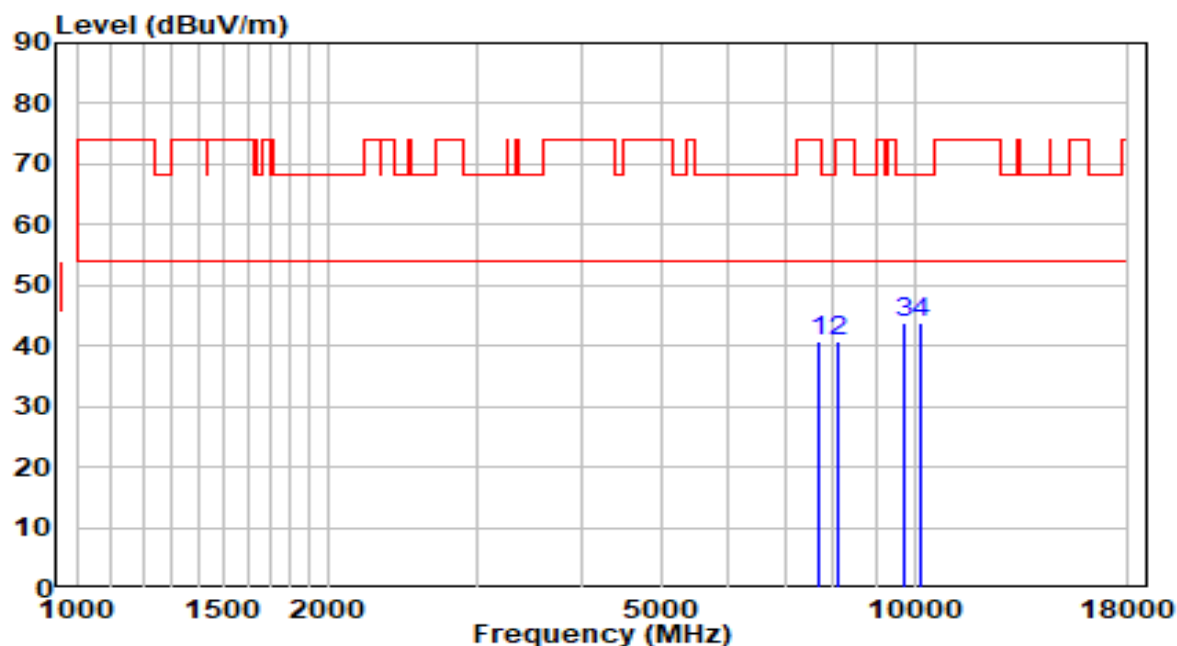


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7672.500	32.61	8.18	40.79	-33.21	74.00	Peak
2	8106.000	31.64	9.07	40.71	-33.29	74.00	Peak
3	* 9729.500	33.04	10.83	43.87	-24.33	68.20	Peak
4	10205.500	32.29	11.63	43.92	-24.28	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-21
Factor	BBHA 9120D	Temp. / Humidity	26.9°C/50%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT20 at Channel 5500MHz - CDD Mode	Test Voltage	110V/60Hz

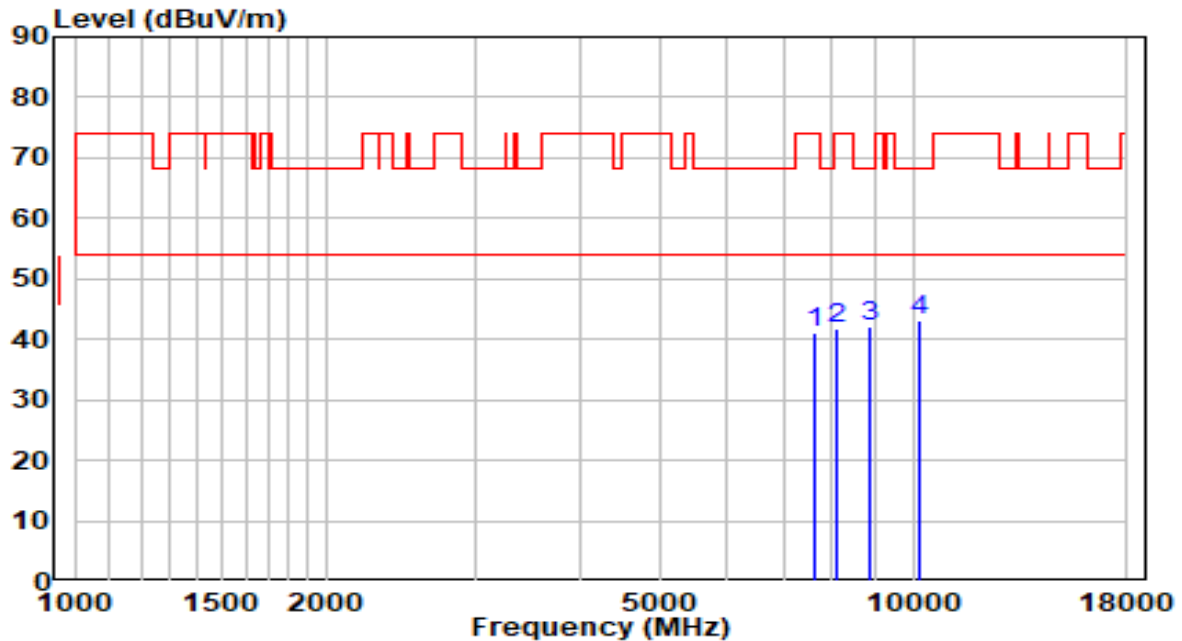


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7655.500	29.10	11.97	41.07	-32.93	74.00	Peak
2	8114.500	29.10	12.51	41.61	-32.39	74.00	Peak
3	8888.000	28.72	13.41	42.13	-26.07	68.20	Peak
4	* 10171.500	27.23	15.95	43.17	-25.03	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-21
Factor	BBHA 9120D	Temp. / Humidity	26.9°C/50%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT20 at Channel 5580MHz - CDD Mode	Test Voltage	110V/60Hz

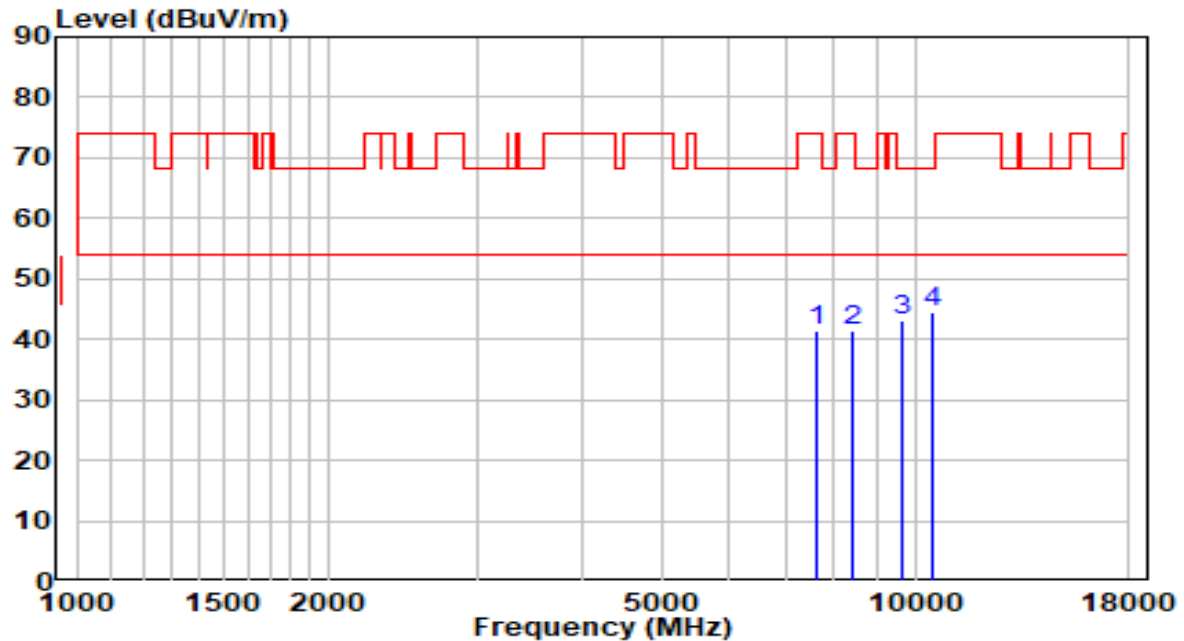


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7655.500	29.31	11.97	41.28	-32.72	74.00	Peak
2	8395.000	29.07	12.47	41.54	-32.46	74.00	Peak
3	9627.500	28.41	14.66	43.06	-25.14	68.20	Peak
4	* 10503.000	27.37	17.07	44.44	-23.76	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-21
Factor	BBHA 9120D	Temp. / Humidity	26.9°C/50%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT20 at Channel 5580MHz - CDD Mode	Test Voltage	110V/60Hz

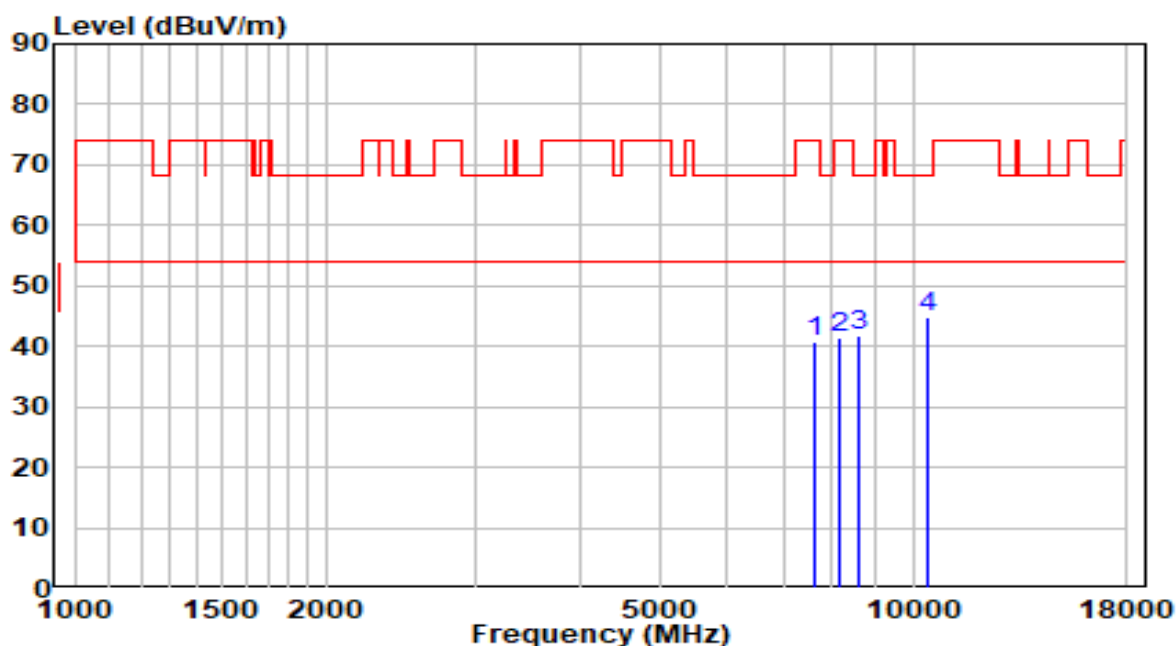


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	7647.000	28.70	11.95	40.65	-33.35	74.00	Peak
2	8148.500	28.88	12.51	41.39	-32.61	74.00	Peak
3	8607.500	29.01	12.72	41.73	-26.47	68.20	Peak
4	* 10409.500	28.14	16.76	44.90	-23.30	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-21
Factor	BBHA 9120D	Temp. / Humidity	26.9°C/50%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT20 at Channel 5700MHz - CDD Mode	Test Voltage	110V/60Hz

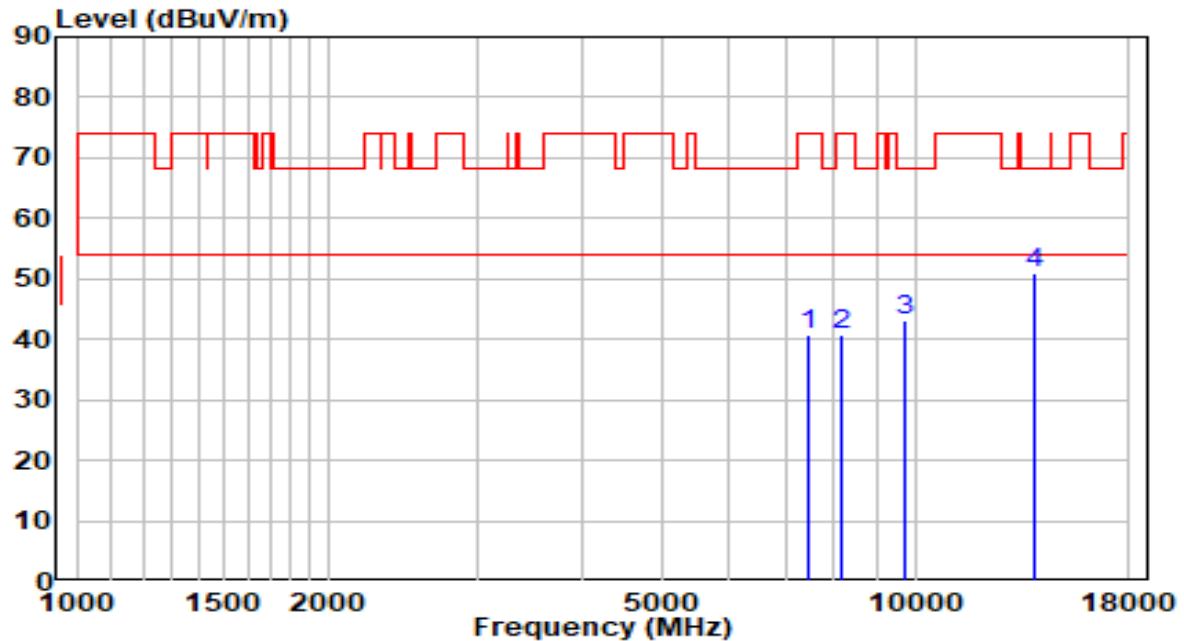


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7477.000	29.05	11.65	40.70	-33.30	74.00	Peak
2	8174.000	28.30	12.50	40.80	-33.20	74.00	Peak
3	9712.500	28.19	14.82	43.01	-25.19	68.20	Peak
4	* 13903.000	29.54	21.33	50.87	-17.33	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-21
Factor	BBHA 9120D	Temp. / Humidity	26.9°C/50%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT20 at Channel 5700MHz - CDD Mode	Test Voltage	110V/60Hz

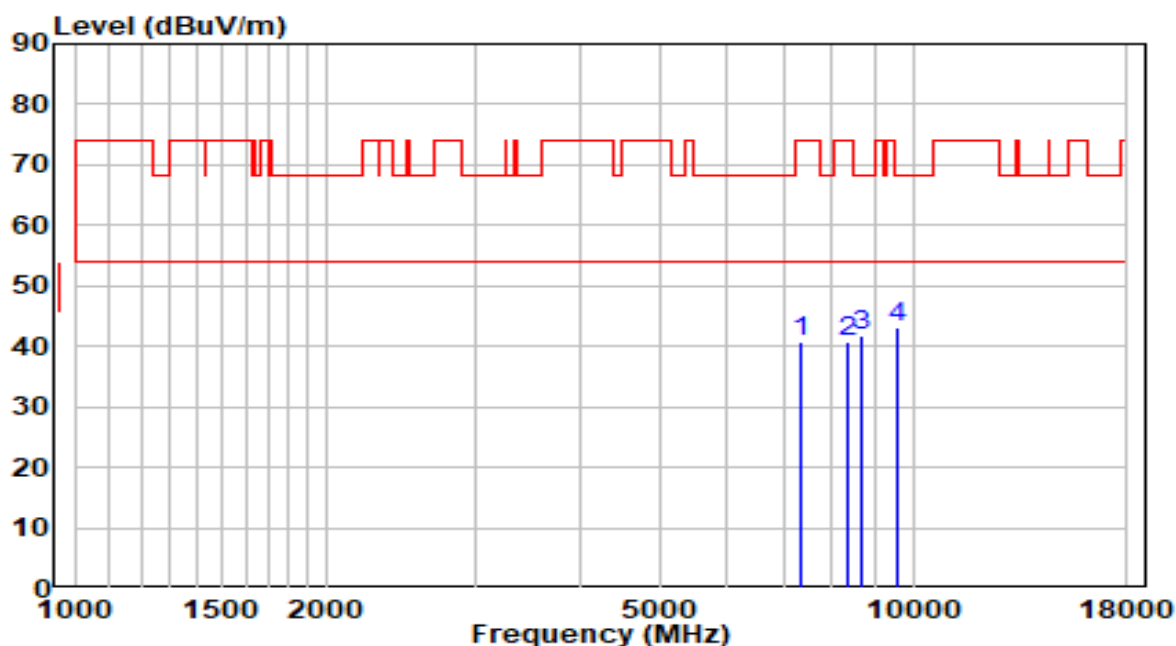


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7324.000	29.58	11.22	40.80	-33.20	74.00	Peak
2	8361.000	28.30	12.48	40.78	-33.22	74.00	Peak
3	8658.500	28.97	12.84	41.82	-26.38	68.20	Peak
4	* 9602.000	28.62	14.61	43.23	-24.97	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-21
Factor	BBHA 9120D	Temp. / Humidity	26.9°C/50%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT20 at Channel 5720MHz - CDD Mode	Test Voltage	110V/60Hz

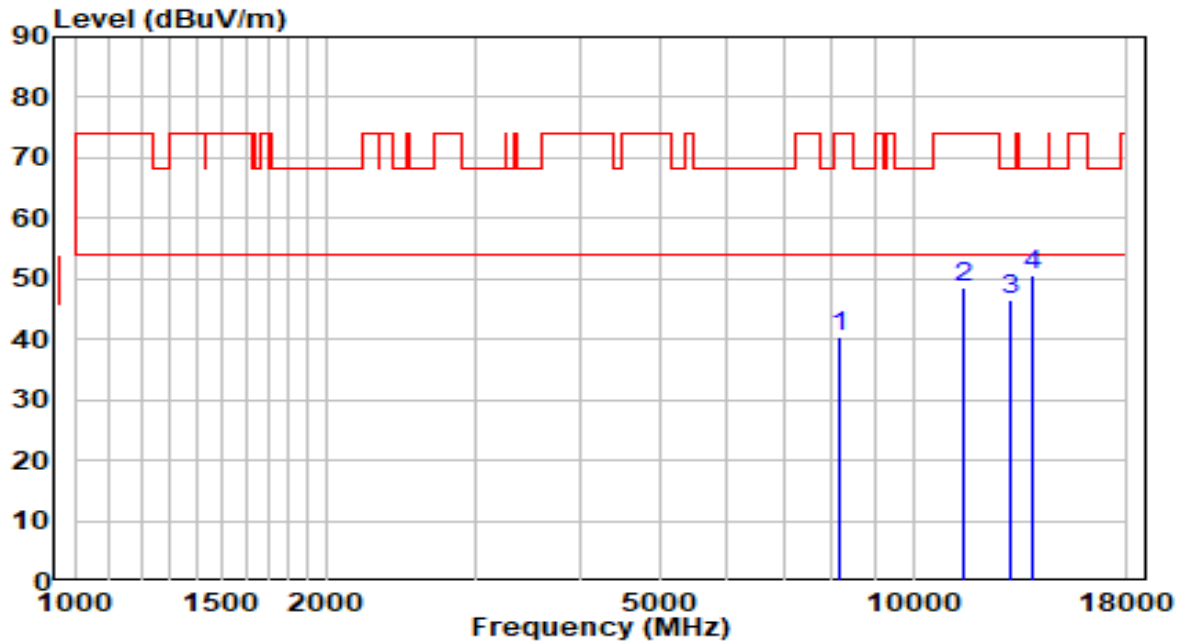


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	8191.000	27.77	12.50	40.27	-33.73	74.00	Peak
2	11446.500	30.18	18.38	48.56	-25.44	74.00	Peak
3	13019.000	27.20	19.34	46.53	-21.67	68.20	Peak
4	* 13869.000	29.35	21.27	50.62	-17.58	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-21
Factor	BBHA 9120D	Temp. / Humidity	26.9°C/50%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT20 at Channel 5720MHz - CDD Mode	Test Voltage	110V/60Hz

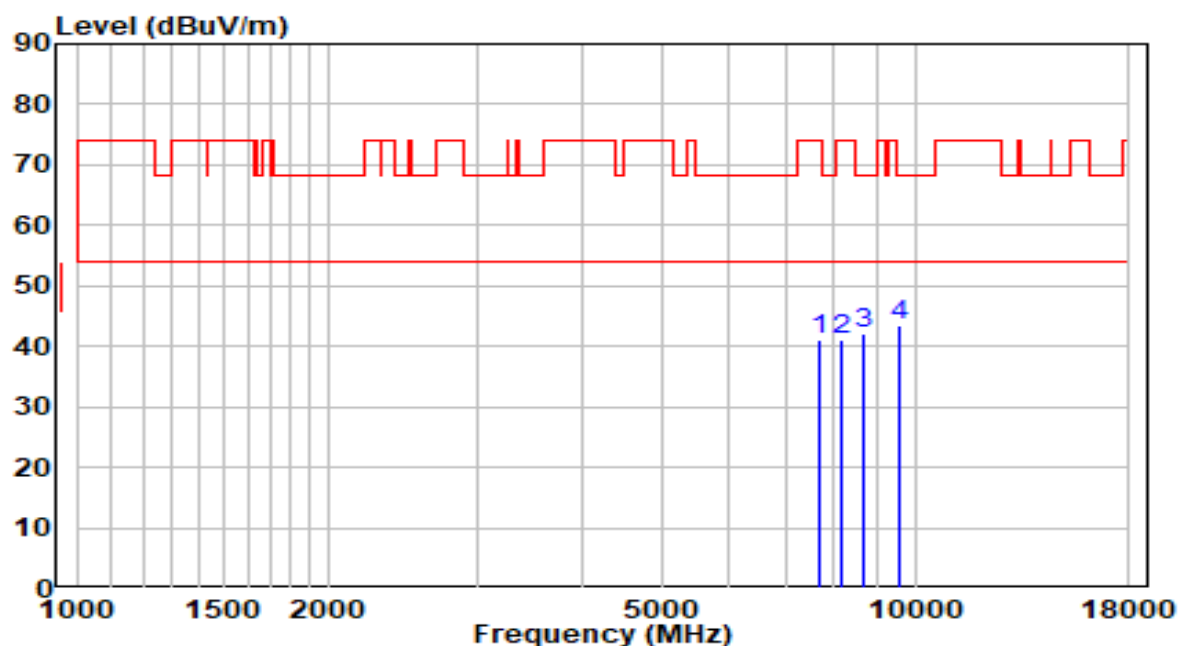


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7715.000	29.16	12.07	41.23	-32.77	74.00	Peak
2	8182.500	28.46	12.50	40.96	-33.04	74.00	Peak
3	8667.000	29.38	12.86	42.24	-25.96	68.20	Peak
4	* 9610.500	29.00	14.63	43.63	-24.57	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-21
Factor	BBHA 9120D	Temp. / Humidity	26.9°C/50%
Polarity	Horizontal	Site / Test Engineer	AC1 / Peter Xu
Test Mode	Transmit by 802.11ac-VHT20 at Channel 5745MHz - CDD Mode	Test Voltage	110V/60Hz

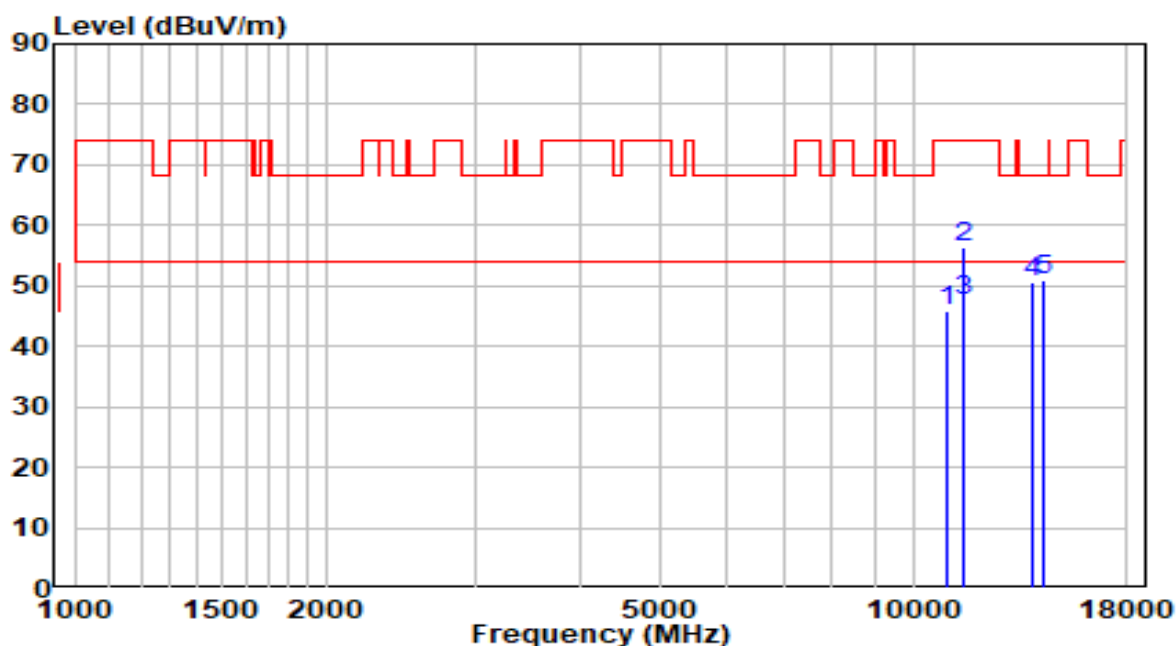


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	10970.500	28.16	17.74	45.89	-28.11	74.00	Peak
2	11489.000	38.03	18.44	56.46	-17.54	74.00	Peak
3	11490.420	29.08	18.44	47.51	-6.49	54.00	Average
4	13911.500	29.19	21.35	50.54	-17.66	68.20	Peak
5	* 14294.000	29.51	21.42	50.94	-17.26	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-21
Factor	BBHA 9120D	Temp. / Humidity	26.9°C/50%
Polarity	Vertical	Site / Test Engineer	AC1 / Peter Xu
Test Mode	Transmit by 802.11ac-VHT20 at Channel 5745MHz - CDD Mode	Test Voltage	110V/60Hz

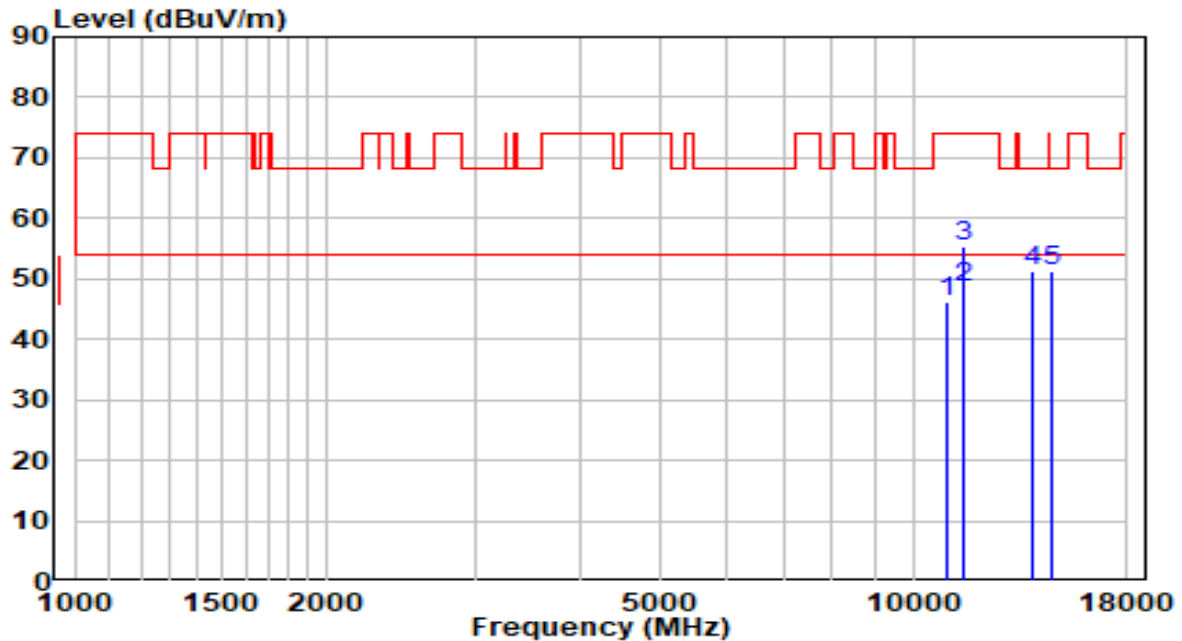


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	10953.500	28.35	17.71	46.06	-27.94	74.00	Peak
2	* 11485.730	30.09	18.43	48.52	-5.48	54.00	Average
3	11489.000	37.01	18.44	55.45	-18.55	74.00	Peak
4	13894.500	29.90	21.32	51.22	-16.98	68.20	Peak
5	14634.000	29.99	21.39	51.38	-16.82	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-21
Factor	BBHA 9120D	Temp. / Humidity	26.9°C/50%
Polarity	Horizontal	Site / Test Engineer	AC1 / Peter Xu
Test Mode	Transmit by 802.11ac-VHT20 at Channel 5785MHz - CDD Mode	Test Voltage	110V/60Hz

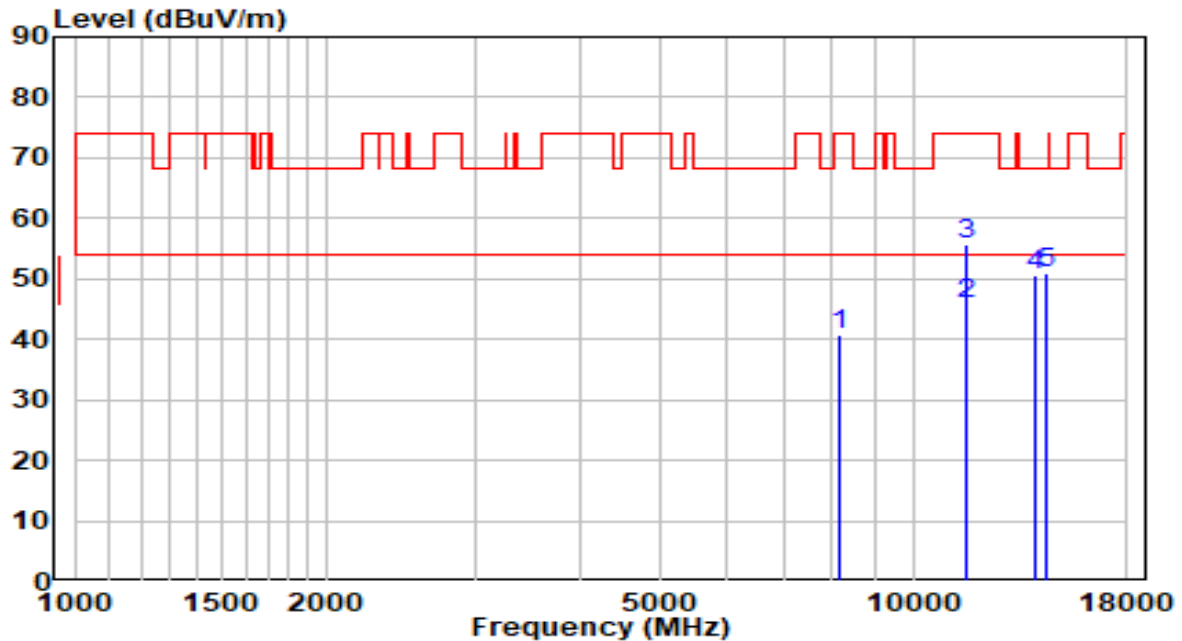


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	8174.000	28.12	12.50	40.62	-33.38	74.00	Peak
2	* 11563.990	27.43	18.37	45.80	-8.20	54.00	Average
3	11565.500	37.28	18.37	55.65	-18.35	74.00	Peak
4	13954.000	29.30	21.43	50.73	-17.47	68.20	Peak
5	14370.500	29.56	21.40	50.96	-17.24	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-21
Factor	BBHA 9120D	Temp. / Humidity	26.9°C/50%
Polarity	Vertical	Site / Test Engineer	AC1 / Peter Xu
Test Mode	Transmit by 802.11ac-VHT20 at Channel 5785MHz - CDD Mode	Test Voltage	110V/60Hz

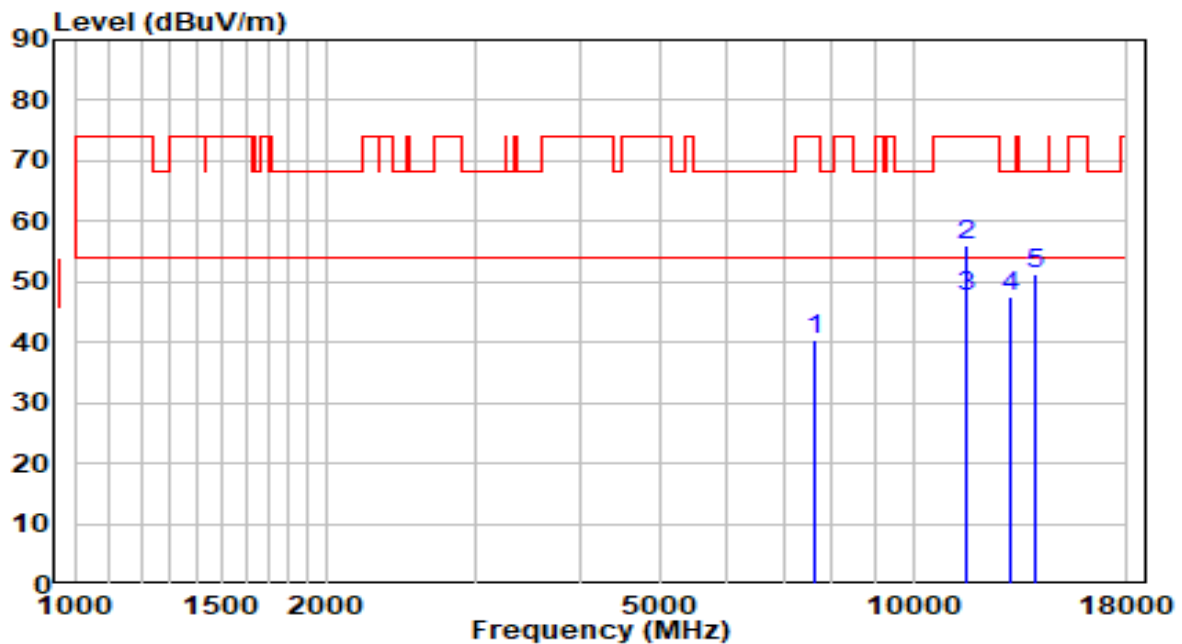


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7638.500	28.62	11.94	40.56	-33.44	74.00	Peak
2	11574.000	37.80	18.36	56.16	-17.84	74.00	Peak
3	* 11578.850	29.14	18.35	47.49	-6.51	54.00	Average
4	13053.000	28.13	19.42	47.56	-20.64	68.20	Peak
5	13945.500	29.81	21.41	51.22	-16.98	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-21
Factor	BBHA 9120D	Temp. / Humidity	26.9°C/50%
Polarity	Horizontal	Site / Test Engineer	AC1 / Peter Xu
Test Mode	Transmit by 802.11ac-VHT20 at Channel 5825MHz - CDD Mode	Test Voltage	110V/60Hz

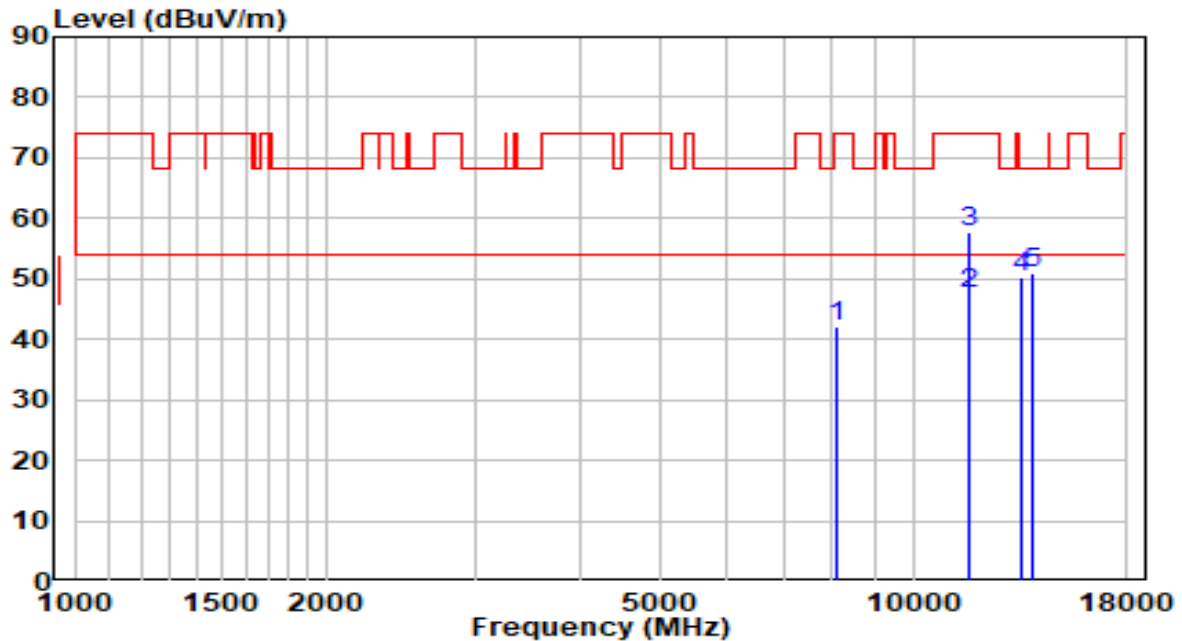


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	8114.500	29.48	12.51	41.99	-32.01	74.00	Peak
2	* 11639.920	29.17	18.27	47.44	-6.56	54.00	Average
3	11650.500	39.52	18.26	57.78	-16.22	74.00	Peak
4	13461.000	29.70	20.46	50.16	-18.04	68.20	Peak
5	13860.500	29.81	21.25	51.06	-17.14	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-21
Factor	BBHA 9120D	Temp. / Humidity	26.9°C/50%
Polarity	Vertical	Site / Test Engineer	AC1 / Peter Xu
Test Mode	Transmit by 802.11ac-VHT20 at Channel 5825MHz - CDD Mode	Test Voltage	110V/60Hz

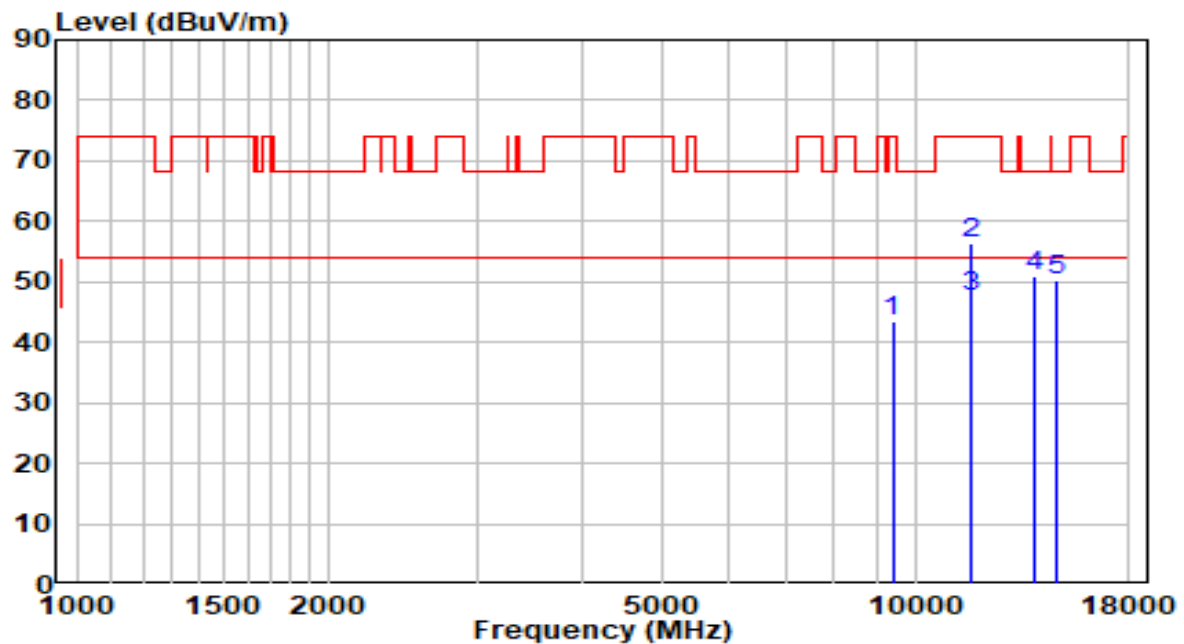


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	9398.000	29.13	14.27	43.40	-30.60	74.00	Peak
2	11650.500	38.05	18.26	56.31	-17.69	74.00	Peak
3	* 11654.430	29.21	18.26	47.47	-6.53	54.00	Average
4	13860.500	29.56	21.25	50.81	-17.39	68.20	Peak
5	14702.000	28.81	21.41	50.22	-17.98	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-21
Factor	BBHA 9120D	Temp. / Humidity	26.9°C/50%
Polarity	Horizontal	Site / Test Engineer	AC1 / Peter Xu
Test Mode	Transmit by 802.11ac-VHT40 at Channel 5190MHz - CDD Mode	Test Voltage	110V/60Hz

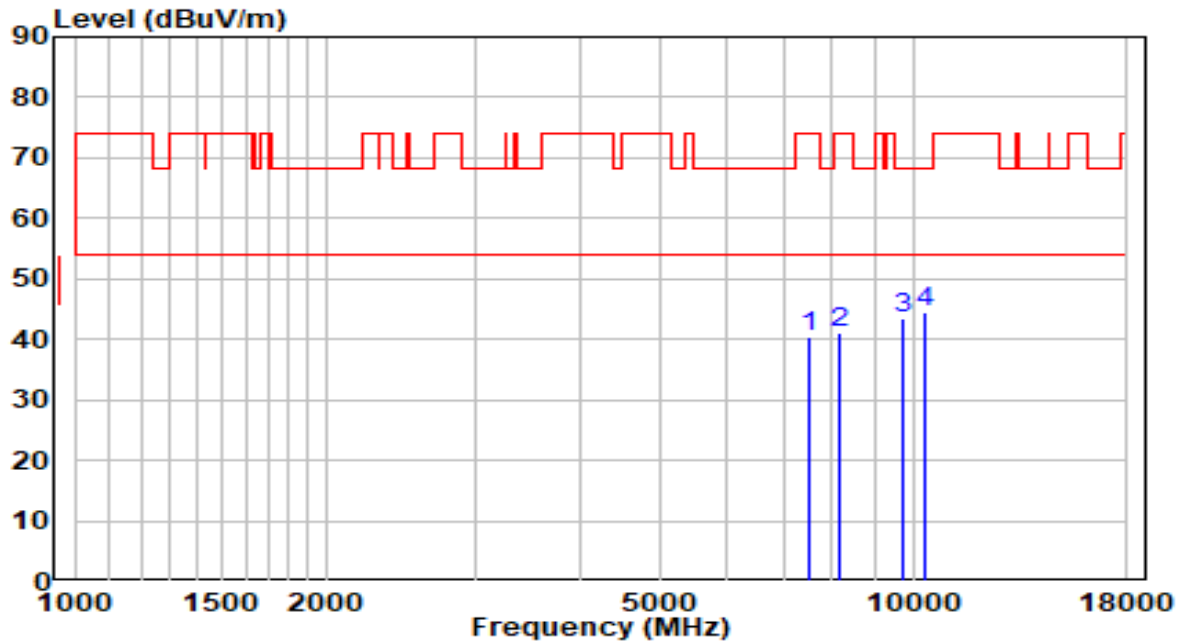


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7502.500	28.70	11.72	40.42	-33.58	74.00	Peak
2	8174.000	28.54	12.50	41.05	-32.95	74.00	Peak
3	9695.500	28.56	14.79	43.35	-24.85	68.20	Peak
4	* 10367.000	28.00	16.62	44.61	-23.59	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-21
Factor	BBHA 9120D	Temp. / Humidity	26.9°C/50%
Polarity	Vertical	Site / Test Engineer	AC1 / Peter Xu
Test Mode	Transmit by 802.11ac-VHT40 at Channel 5190MHz - CDD Mode	Test Voltage	110V/60Hz

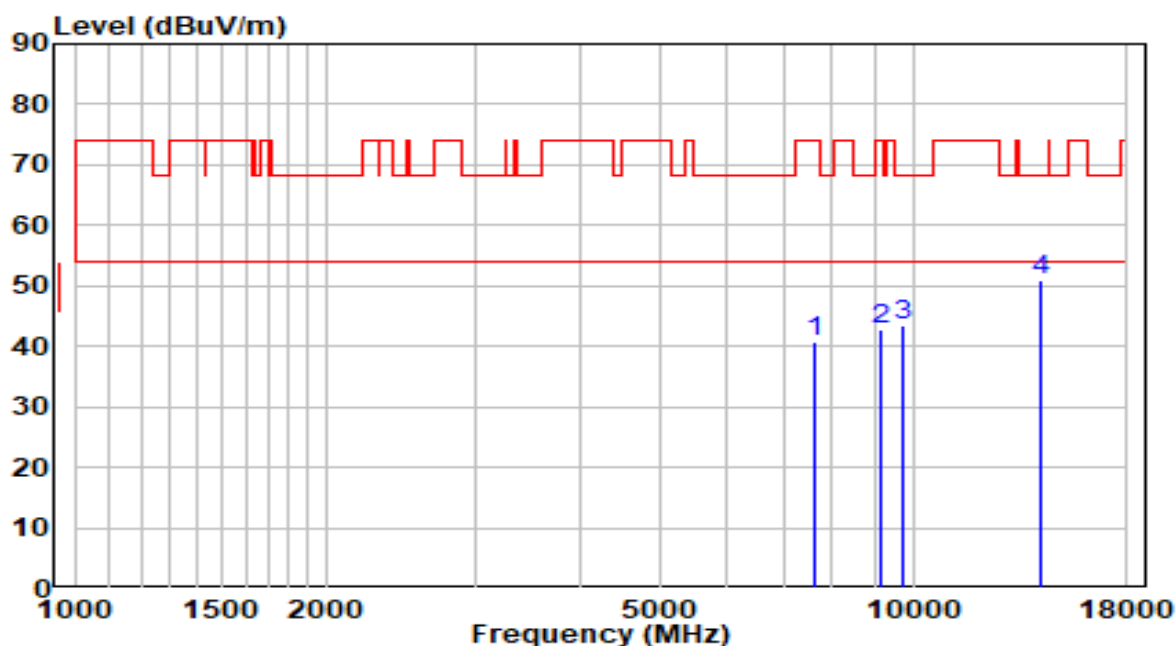


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7604.500	28.76	11.89	40.65	-33.35	74.00	Peak
2	9177.000	28.72	13.94	42.66	-31.34	74.00	Peak
3	9738.000	28.56	14.87	43.43	-24.77	68.20	Peak
4	* 14209.000	29.44	21.45	50.89	-17.31	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-21
Factor	BBHA 9120D	Temp. / Humidity	26.9°C/50%
Polarity	Horizontal	Site / Test Engineer	AC1 / Peter Xu
Test Mode	Transmit by 802.11ac-VHT40 at Channel 5230MHz - CDD Mode	Test Voltage	110V/60Hz

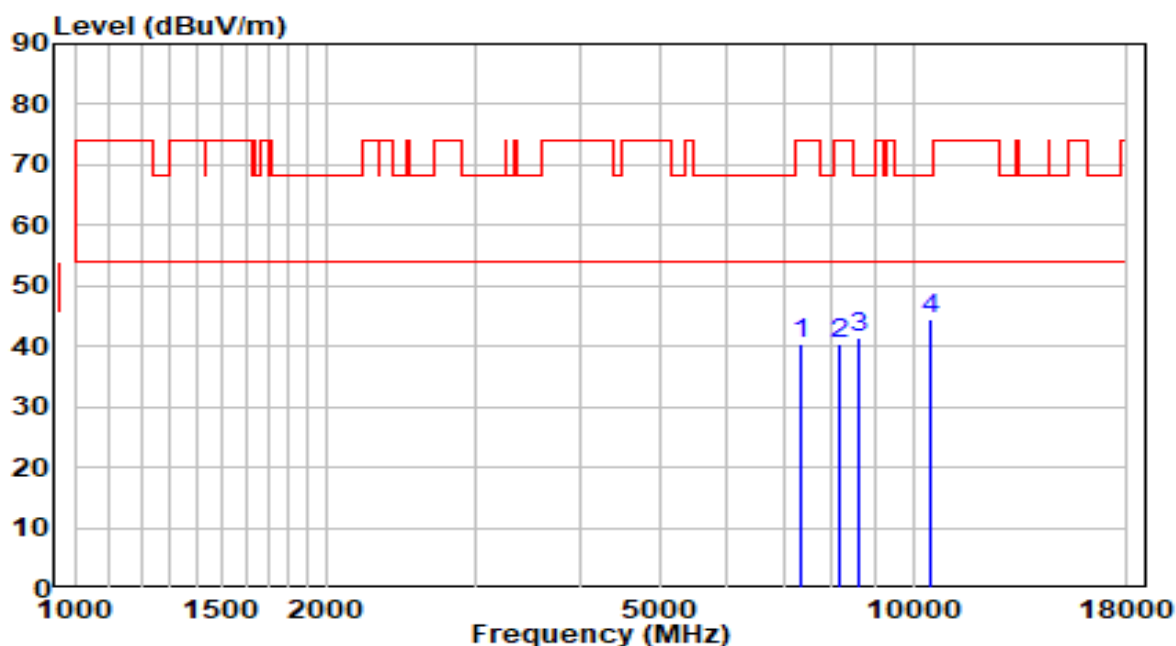


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7341.000	29.25	11.27	40.51	-33.49	74.00	Peak
2	8165.500	27.80	12.51	40.31	-33.69	74.00	Peak
3	8607.500	28.68	12.72	41.40	-26.80	68.20	Peak
4	* 10469.000	27.58	16.96	44.54	-23.66	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-21
Factor	BBHA 9120D	Temp. / Humidity	26.9°C/50%
Polarity	Vertical	Site / Test Engineer	AC1 / Peter Xu
Test Mode	Transmit by 802.11ac-VHT40 at Channel 5230MHz - CDD Mode	Test Voltage	110V/60Hz

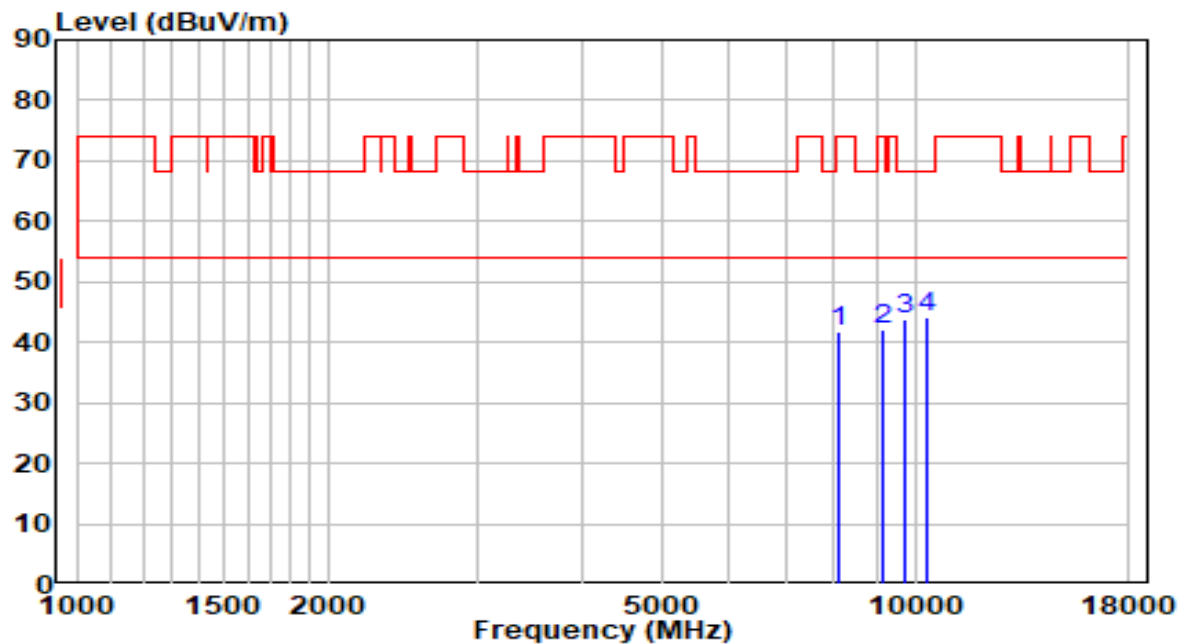


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	8089.000	29.12	12.52	41.64	-32.36	74.00	Peak
2	9143.000	28.23	13.89	42.12	-31.88	74.00	Peak
3	9755.000	28.83	14.90	43.73	-24.47	68.20	Peak
4	* 10333.000	27.65	16.50	44.15	-24.05	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-21
Factor	BBHA 9120D	Temp. / Humidity	26.9°C/50%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT40 at Channel 5270MHz - CDD Mode	Test Voltage	110V/60Hz

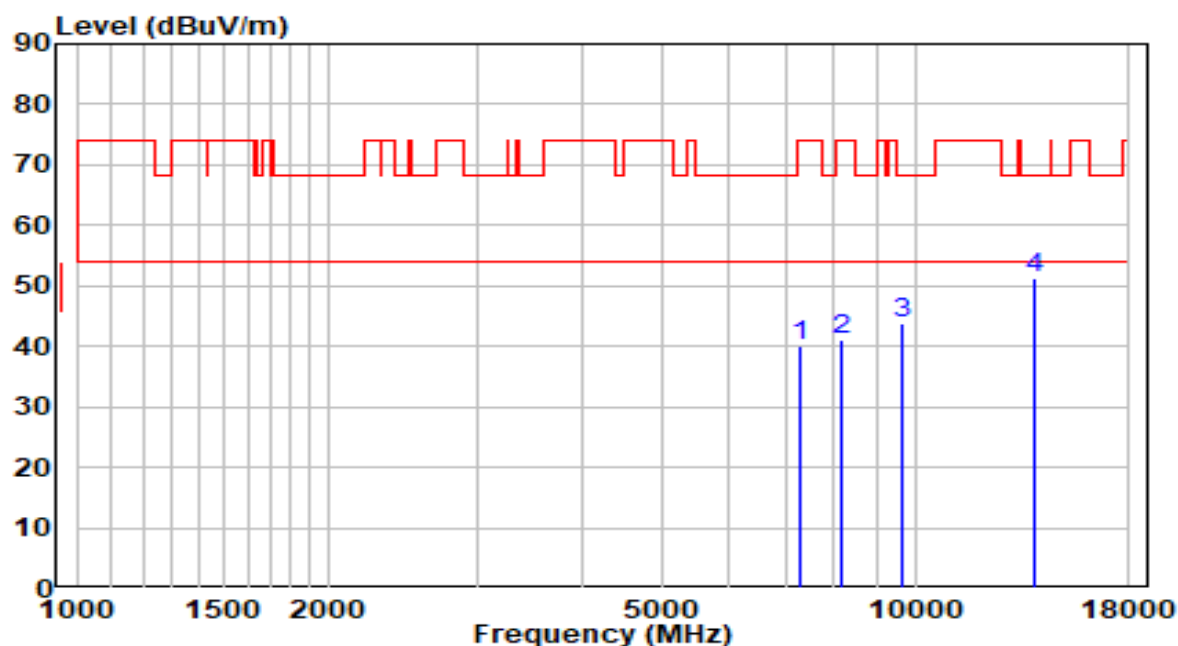


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7307.000	29.05	11.17	40.22	-33.78	74.00	Peak
2	8157.000	28.48	12.51	40.99	-33.01	74.00	Peak
3	9670.000	29.16	14.74	43.90	-24.30	68.20	Peak
4	* 13920.000	29.83	21.37	51.20	-17.00	68.20	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
- Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-21
Factor	BBHA 9120D	Temp. / Humidity	26.9°C/50%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT40 at Channel 5270MHz - CDD Mode	Test Voltage	110V/60Hz

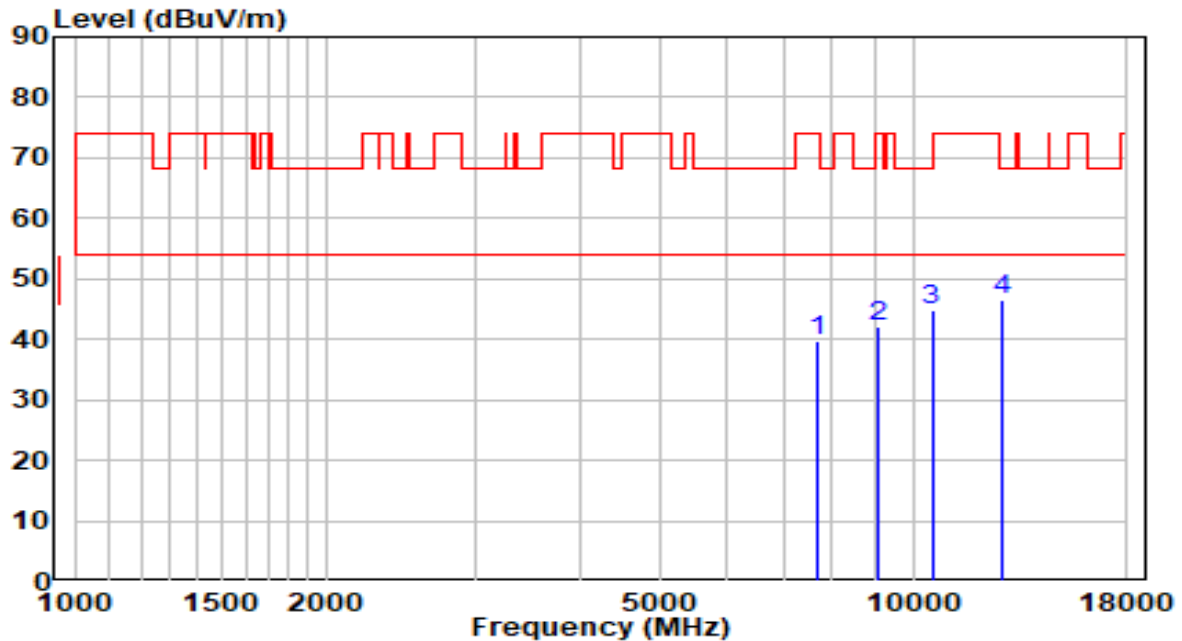


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7681.000	27.89	12.01	39.90	-34.10	74.00	Peak
2	9075.000	28.20	13.79	41.99	-32.01	74.00	Peak
3	10528.500	27.57	17.11	44.68	-23.52	68.20	Peak
4	* 12806.500	27.66	18.75	46.42	-21.78	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-21
Factor	BBHA 9120D	Temp. / Humidity	26.9°C/50%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT40 at Channel 5310MHz - CDD Mode	Test Voltage	110V/60Hz

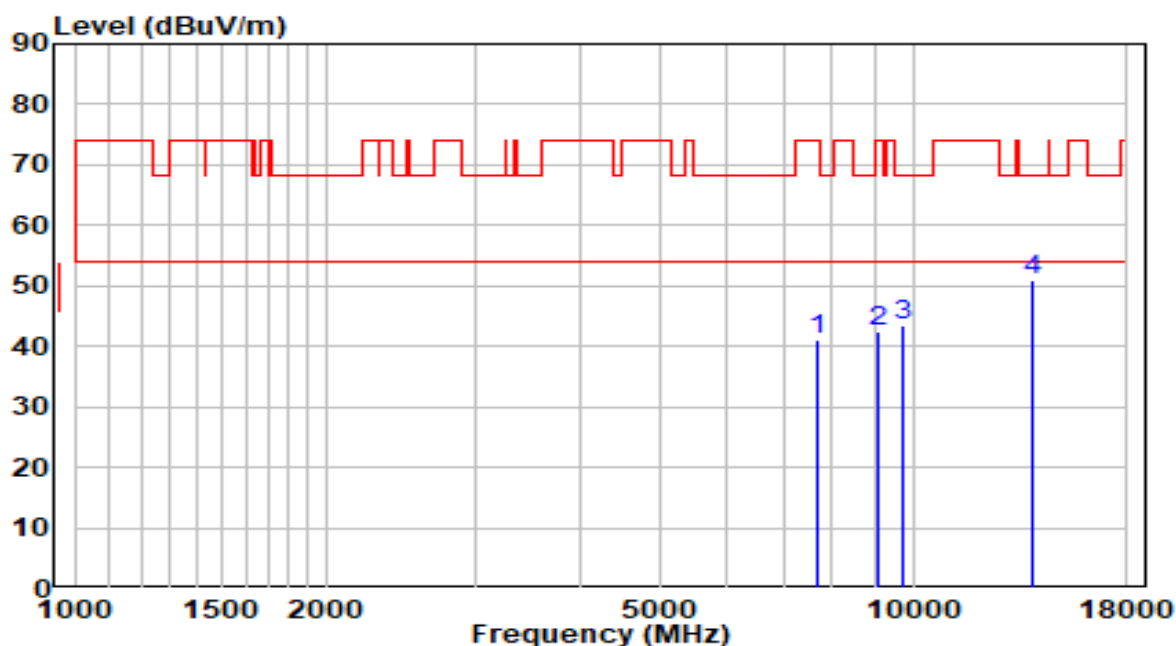


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7664.000	29.18	11.98	41.16	-32.84	74.00	Peak
2	9109.000	28.52	13.84	42.36	-31.64	74.00	Peak
3	9704.000	28.68	14.80	43.49	-24.71	68.20	Peak
4	* 13894.500	29.74	21.32	51.06	-17.14	68.20	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
- Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-21
Factor	BBHA 9120D	Temp. / Humidity	26.9°C/50%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT40 at Channel 5310MHz - CDD Mode	Test Voltage	110V/60Hz

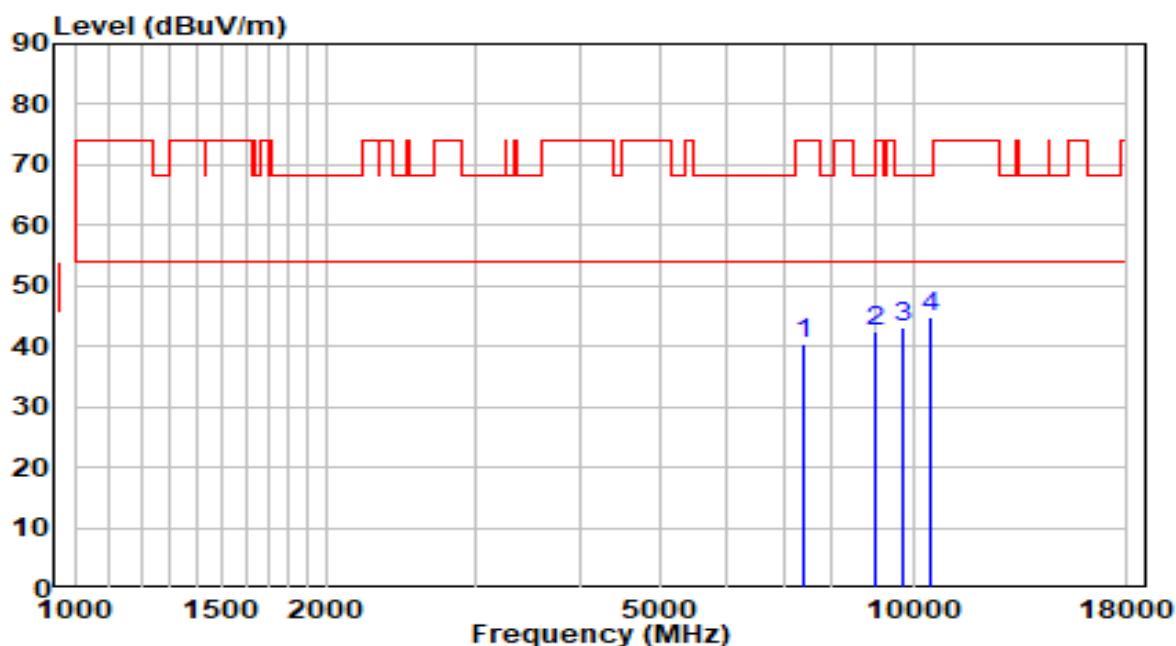


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7409.000	29.10	11.46	40.56	-33.44	74.00	Peak
2	9032.500	28.73	13.73	42.45	-31.55	74.00	Peak
3	9738.000	28.14	14.87	43.01	-25.19	68.20	Peak
4	* 10469.000	27.71	16.96	44.67	-23.53	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-21
Factor	BBHA 9120D	Temp. / Humidity	26.9°C/50%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT40 at Channel 5510MHz - CDD Mode	Test Voltage	110V/60Hz

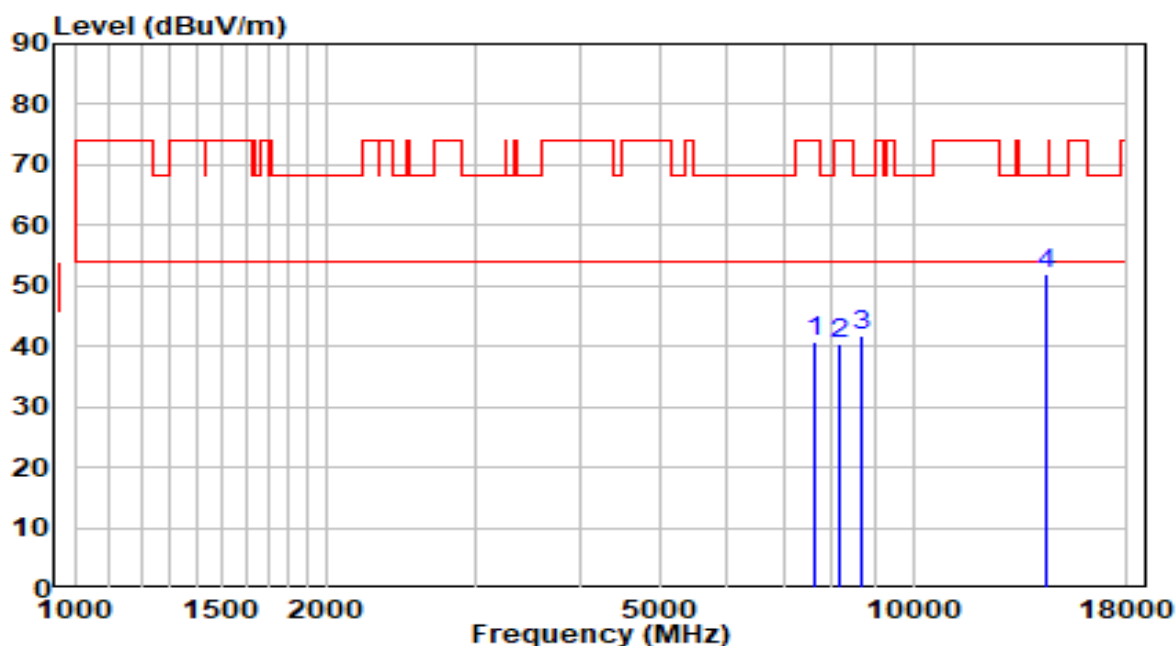


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7630.000	28.66	11.93	40.59	-33.41	74.00	Peak
2	8140.000	27.97	12.51	40.48	-33.52	74.00	Peak
3	8684.000	28.71	12.91	41.62	-26.58	68.20	Peak
4	* 14370.500	30.52	21.40	51.92	-16.28	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-21
Factor	BBHA 9120D	Temp. / Humidity	26.9°C/50%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT40 at Channel 5510MHz - CDD Mode	Test Voltage	110V/60Hz

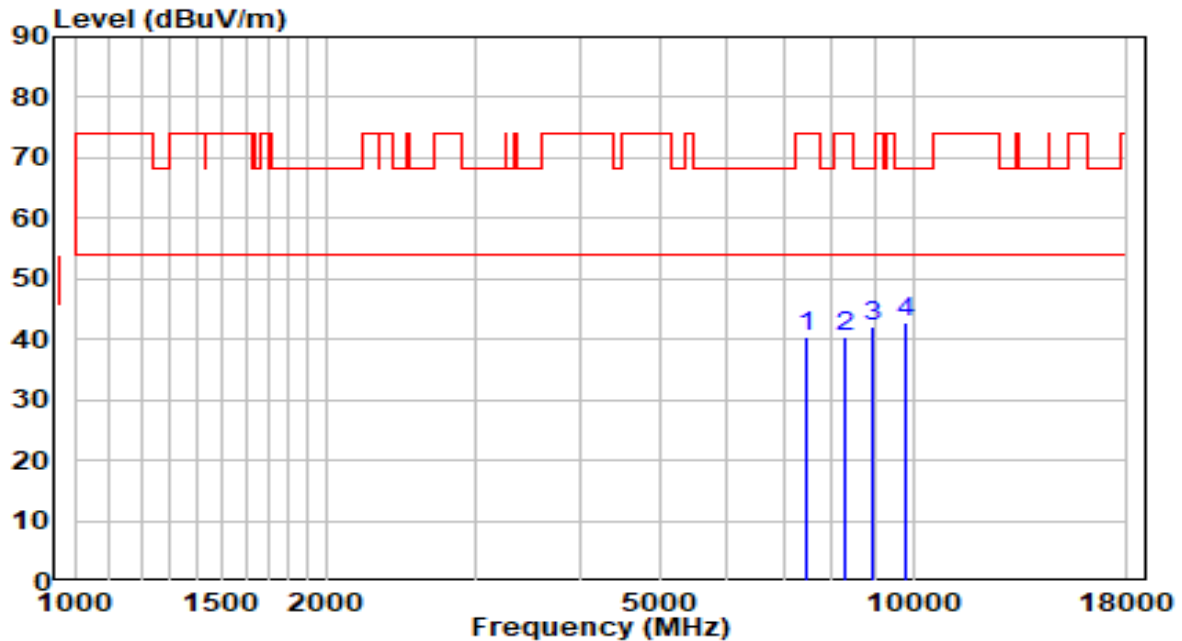


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7451.500	28.92	11.58	40.50	-33.50	74.00	Peak
2	8293.000	28.07	12.49	40.56	-33.44	74.00	Peak
3	8947.500	28.40	13.55	41.95	-26.25	68.20	Peak
4	* 9772.000	27.99	14.93	42.92	-25.28	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-21
Factor	BBHA 9120D	Temp. / Humidity	26.9°C/50%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT40 at Channel 5550MHz - CDD Mode	Test Voltage	110V/60Hz

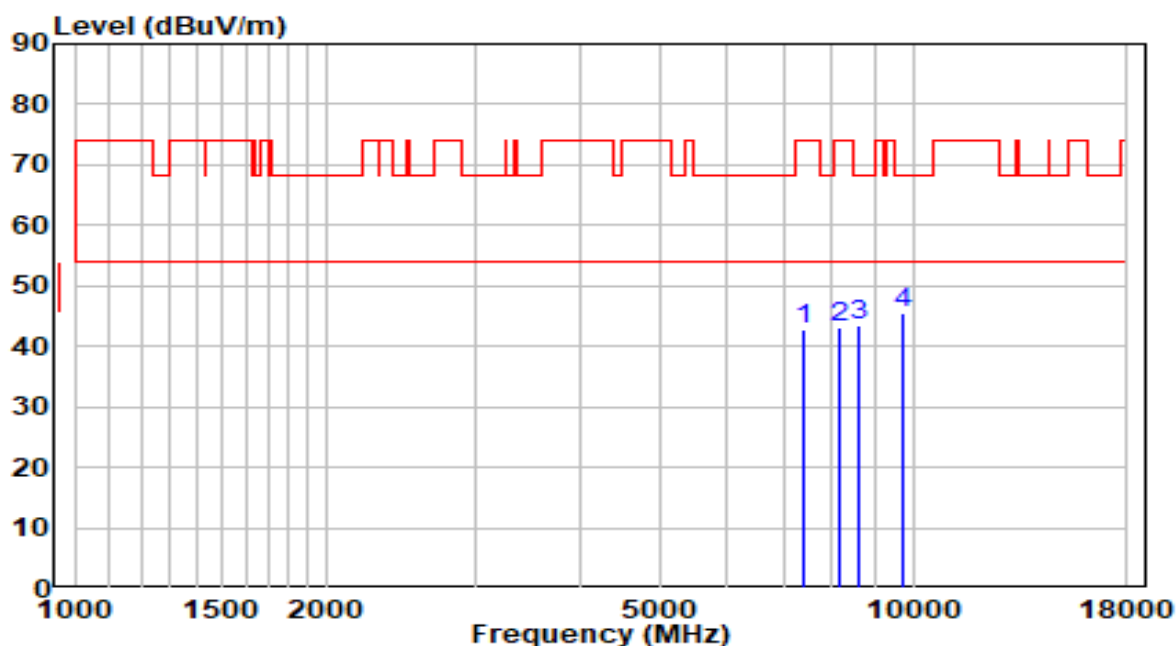


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7426.000	31.21	11.51	42.71	-31.29	74.00	Peak
2	8148.500	30.51	12.51	43.02	-30.98	74.00	Peak
3	8633.000	30.62	12.78	43.40	-24.80	68.20	Peak
4	* 9746.500	30.57	14.88	45.46	-22.74	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-21
Factor	BBHA 9120D	Temp. / Humidity	26.9°C/50%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT40 at Channel 5550MHz - CDD Mode	Test Voltage	110V/60Hz

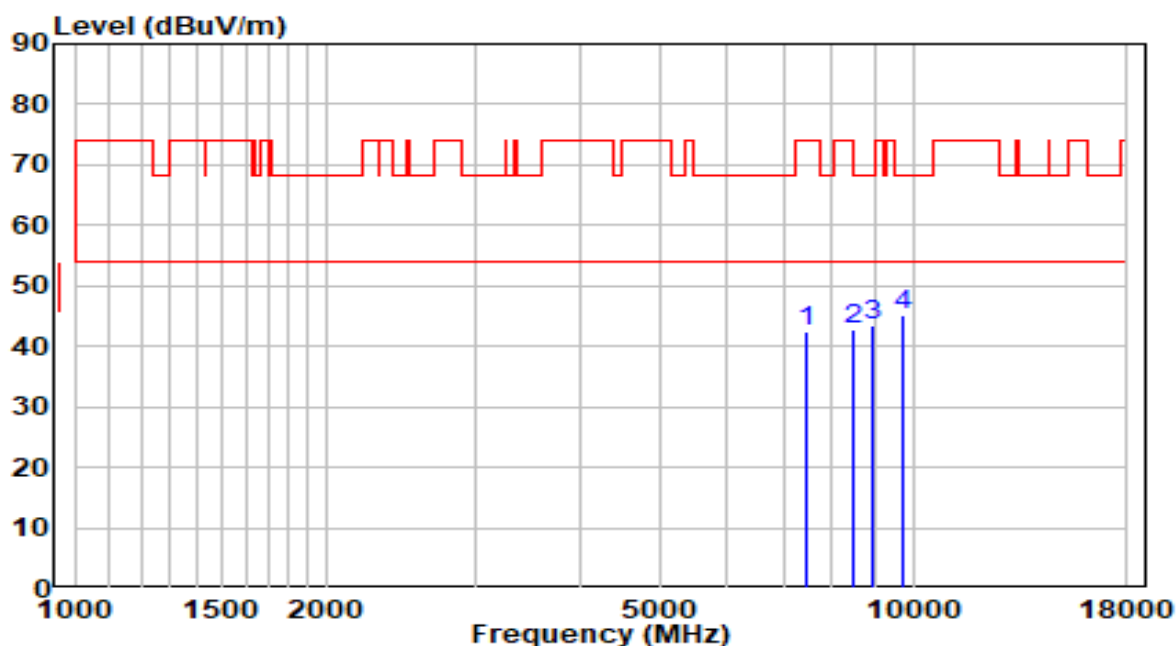


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7477.000	30.77	11.65	42.42	-31.58	74.00	Peak
2	8463.000	30.34	12.46	42.80	-31.20	74.00	Peak
3	8913.500	29.95	13.47	43.42	-24.78	68.20	Peak
4	* 9712.500	30.47	14.82	45.29	-22.91	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-21
Factor	BBHA 9120D	Temp. / Humidity	26.9°C/50%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT40 at Channel 5670MHz - CDD Mode	Test Voltage	110V/60Hz

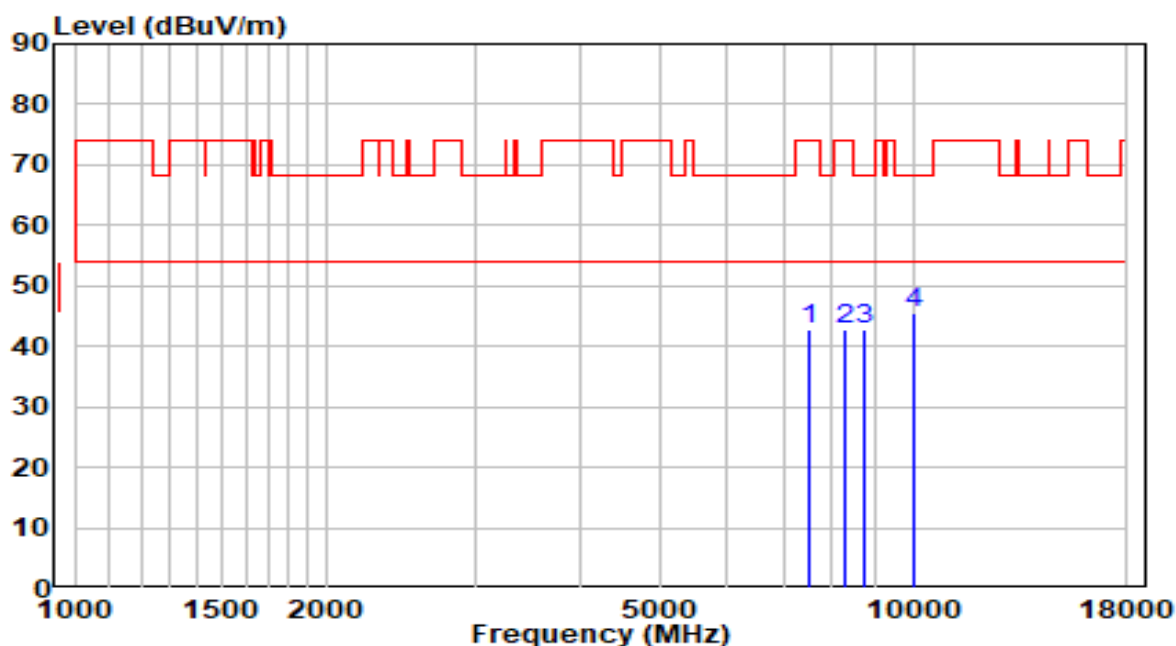


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7511.000	31.05	11.73	42.78	-31.22	74.00	Peak
2	8310.000	30.17	12.48	42.66	-31.34	74.00	Peak
3	8743.500	29.87	13.05	42.92	-25.28	68.20	Peak
4	* 10018.500	30.07	15.42	45.49	-22.71	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-21
Factor	BBHA 9120D	Temp. / Humidity	26.9°C/50%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT40 at Channel 5670MHz - CDD Mode	Test Voltage	110V/60Hz

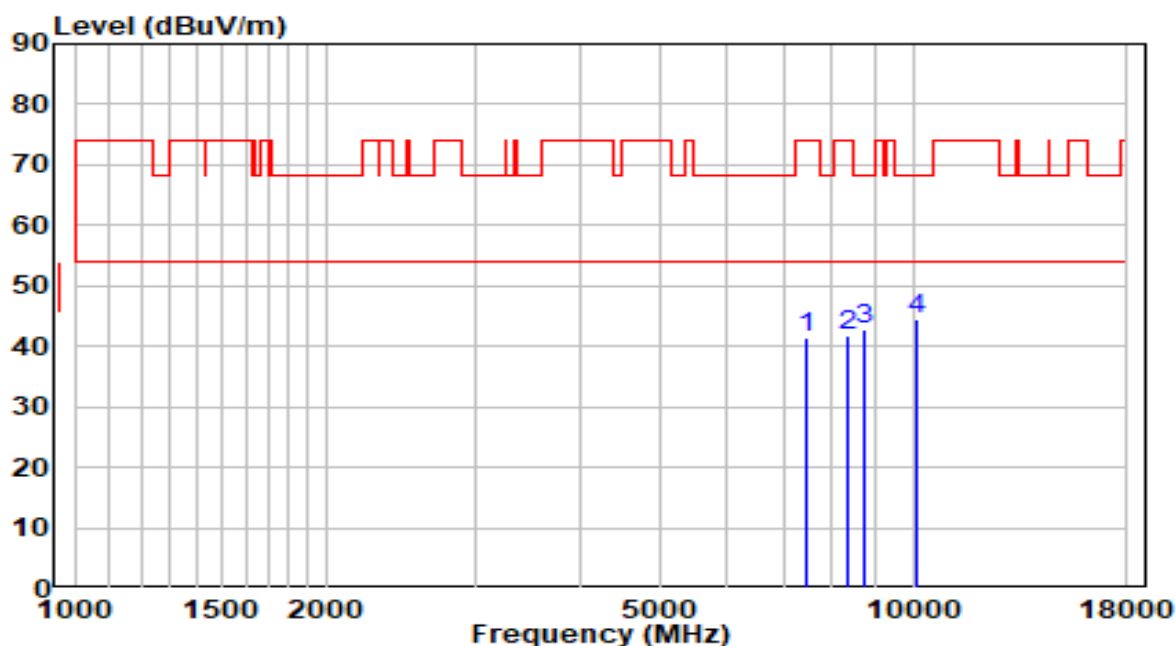


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7443.000	30.03	11.55	41.58	-32.42	74.00	Peak
2	8386.500	29.44	12.47	41.91	-32.09	74.00	Peak
3	8743.500	29.86	13.05	42.91	-25.29	68.20	Peak
4	* 10103.500	28.67	15.71	44.39	-23.81	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-21
Factor	BBHA 9120D	Temp. / Humidity	26.9°C/50%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT40 at Channel 5710MHz - CDD Mode	Test Voltage	110V/60Hz

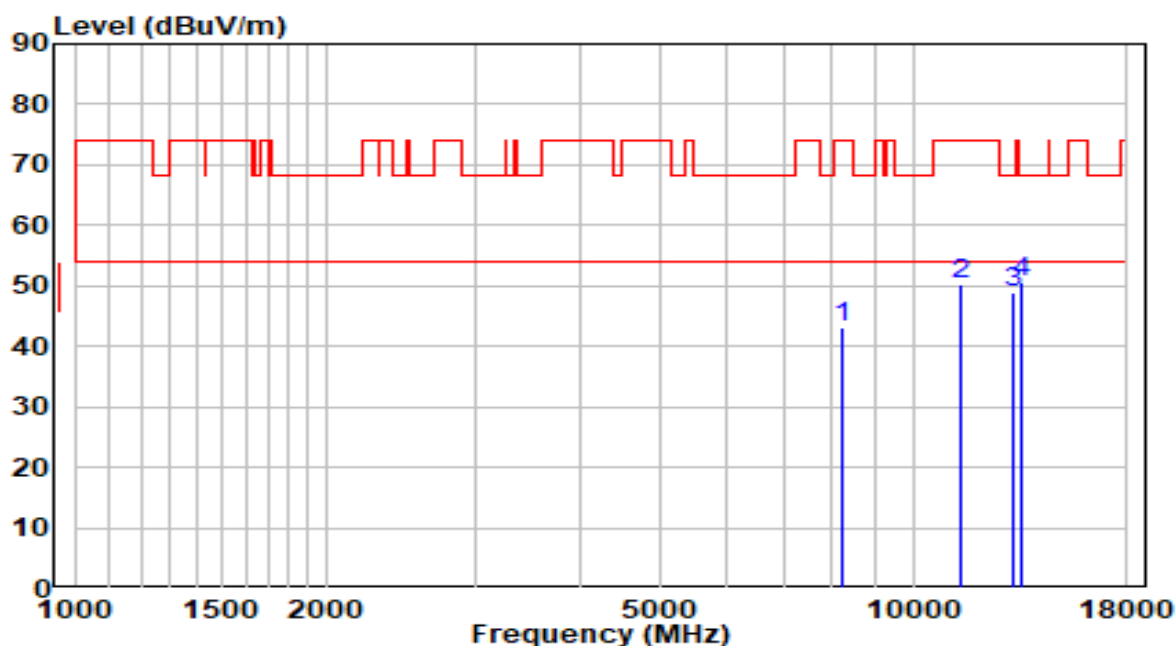


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	8216.500	30.79	12.50	43.28	-30.72	74.00	Peak
2	11421.000	32.09	18.34	50.43	-23.57	74.00	Peak
3	13172.000	29.14	19.73	48.86	-19.34	68.20	Peak
4	* 13478.000	30.01	20.50	50.51	-17.69	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-21
Factor	BBHA 9120D	Temp. / Humidity	26.9°C/50%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT40 at Channel 5710MHz - CDD Mode	Test Voltage	110V/60Hz

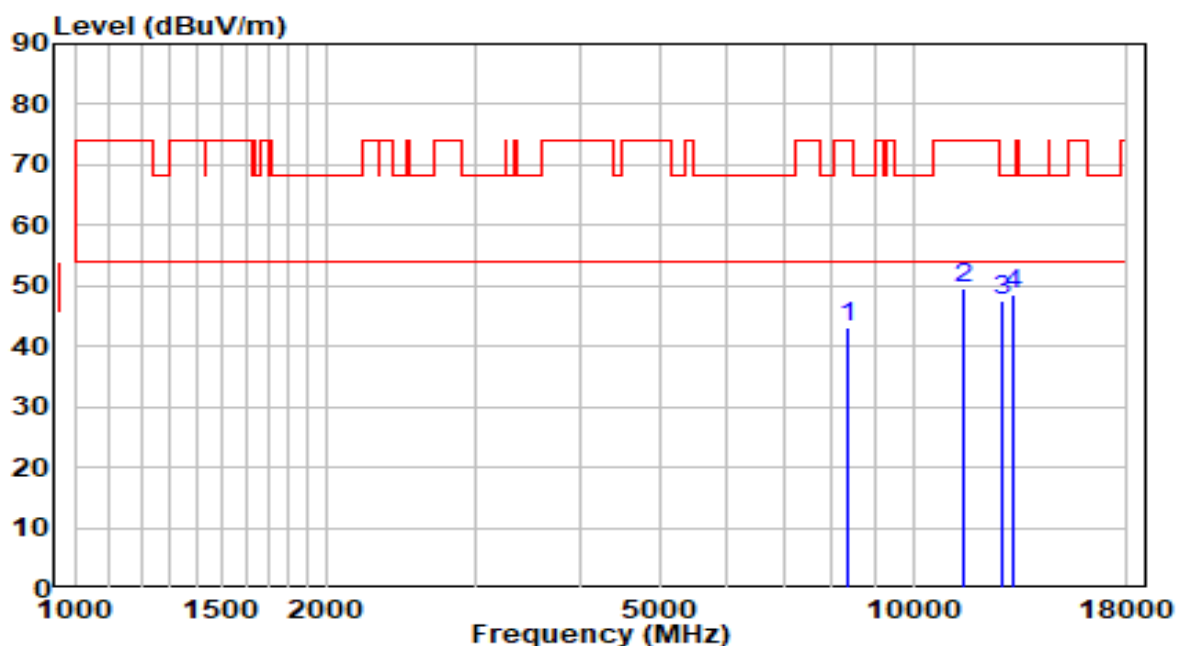


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	8369.500	30.57	12.47	43.04	-30.96	74.00	Peak
2	11446.500	31.12	18.38	49.50	-24.50	74.00	Peak
3	12755.500	29.09	18.61	47.71	-20.49	68.20	Peak
4	* 13172.000	28.94	19.73	48.66	-19.54	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-21
Factor	BBHA 9120D	Temp. / Humidity	26.9°C/50%
Polarity	Horizontal	Site / Test Engineer	AC1 / Peter Xu
Test Mode	Transmit by 802.11ac-VHT40 at Channel 5755MHz - CDD Mode	Test Voltage	110V/60Hz

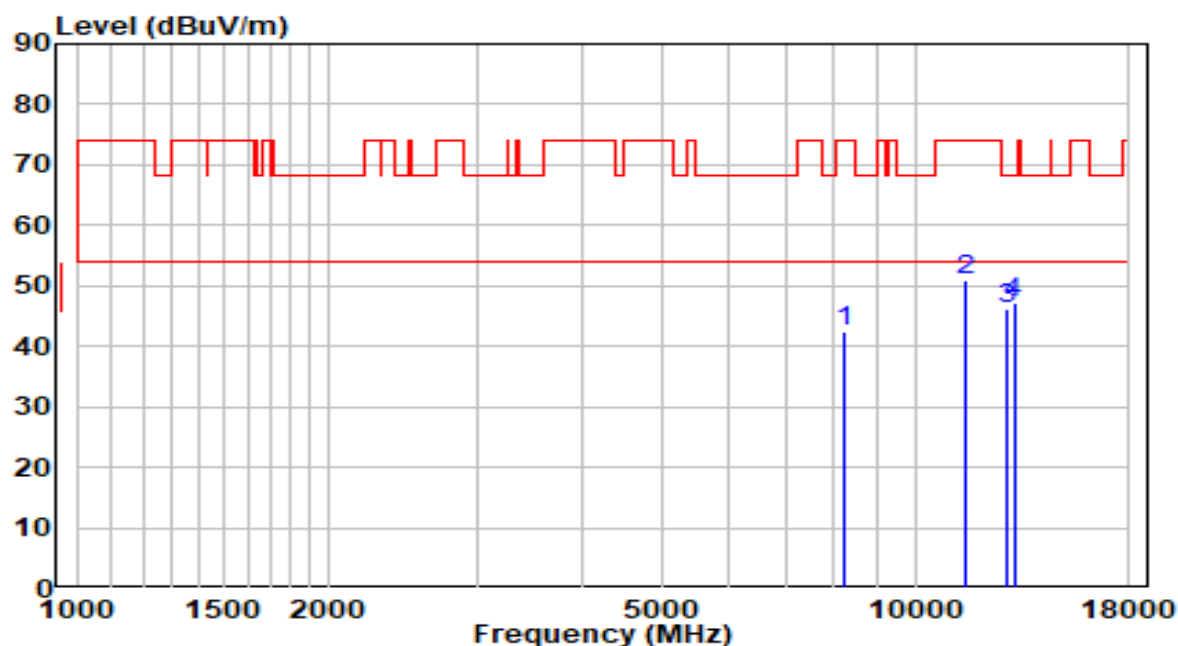


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	8242.000	29.80	12.49	42.29	-31.71	74.00	Peak
2	11514.500	32.51	18.43	50.94	-23.06	74.00	Peak
3	12840.500	27.41	18.85	46.26	-21.94	68.20	Peak
4	* 13112.500	27.51	19.57	47.09	-21.11	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-21
Factor	BBHA 9120D	Temp. / Humidity	26.9°C/50%
Polarity	Vertical	Site / Test Engineer	AC1 / Peter Xu
Test Mode	Transmit by 802.11ac-VHT40 at Channel 5755MHz - CDD Mode	Test Voltage	110V/60Hz

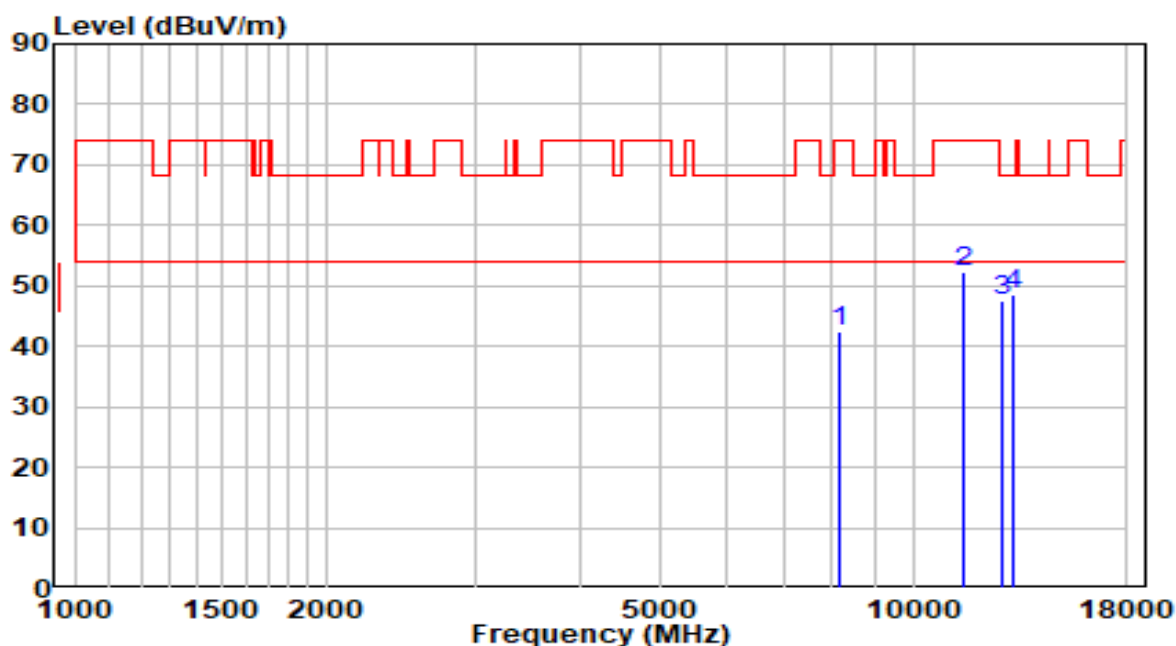


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	8165.500	30.06	12.51	42.57	-31.43	74.00	Peak
2	11506.000	33.74	18.44	52.18	-21.82	74.00	Peak
3	12806.500	28.84	18.75	47.59	-20.61	68.20	Peak
4	* 13172.000	28.96	19.73	48.68	-19.52	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-21
Factor	BBHA 9120D	Temp. / Humidity	26.9°C/50%
Polarity	Horizontal	Site / Test Engineer	AC1 / Peter Xu
Test Mode	Transmit by 802.11ac-VHT40 at Channel 5795MHz - CDD Mode	Test Voltage	110V/60Hz

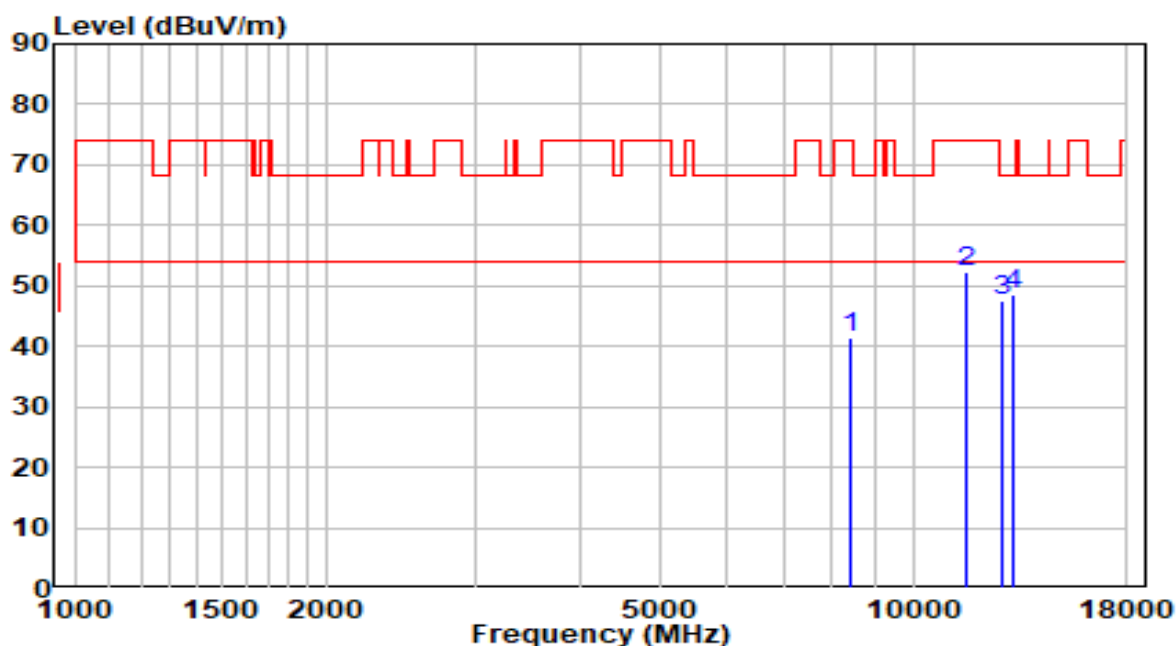


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	8395.000	29.10	12.47	41.57	-32.43	74.00	Peak
2	11591.000	34.04	18.34	52.38	-21.62	74.00	Peak
3	12755.500	29.07	18.61	47.68	-20.52	68.20	Peak
4	* 13163.500	29.03	19.70	48.73	-19.47	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-21
Factor	BBHA 9120D	Temp. / Humidity	26.9°C/50%
Polarity	Vertical	Site / Test Engineer	AC1 / Peter Xu
Test Mode	Transmit by 802.11ac-VHT40 at Channel 5795MHz - CDD Mode	Test Voltage	110V/60Hz

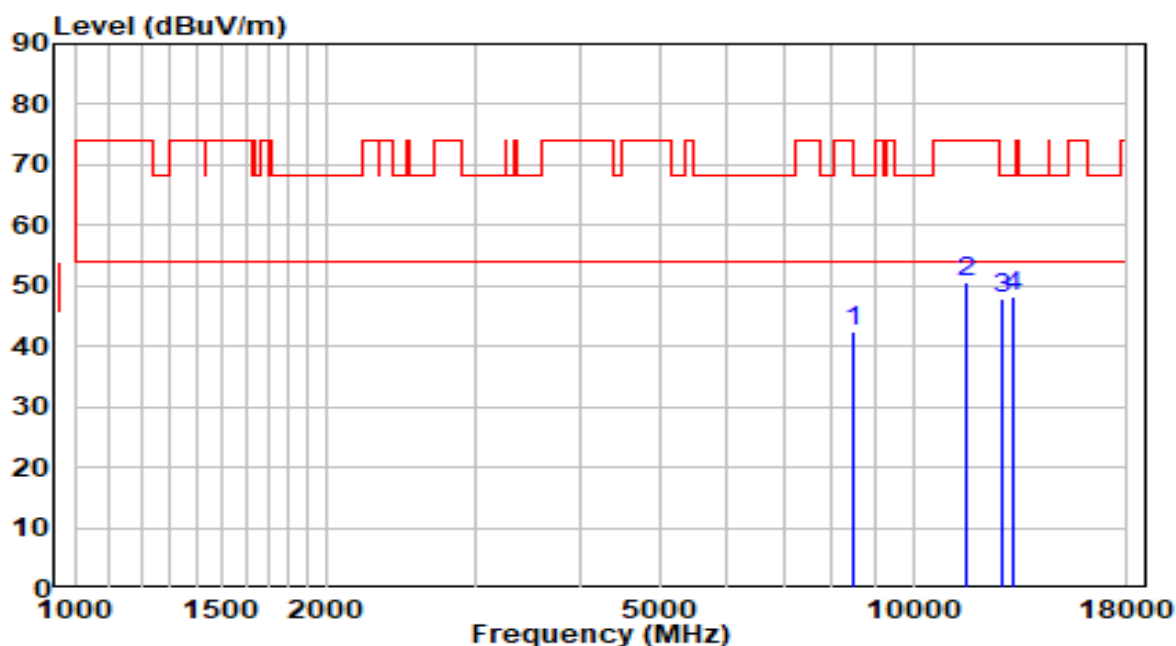


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	8463.000	29.85	12.46	42.31	-31.69	74.00	Peak
2	11591.000	32.12	18.34	50.46	-23.54	74.00	Peak
3	12815.000	29.01	18.78	47.79	-20.41	68.20	Peak
4	* 13163.500	28.65	19.70	48.35	-19.85	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-21
Factor	BBHA 9120D	Temp. / Humidity	26.9°C/50%
Polarity	Horizontal	Site / Test Engineer	AC1 / Peter Xu
Test Mode	Transmit by 802.11ac-VHT80 at Channel 5210MHz - CDD Mode	Test Voltage	110V/60Hz

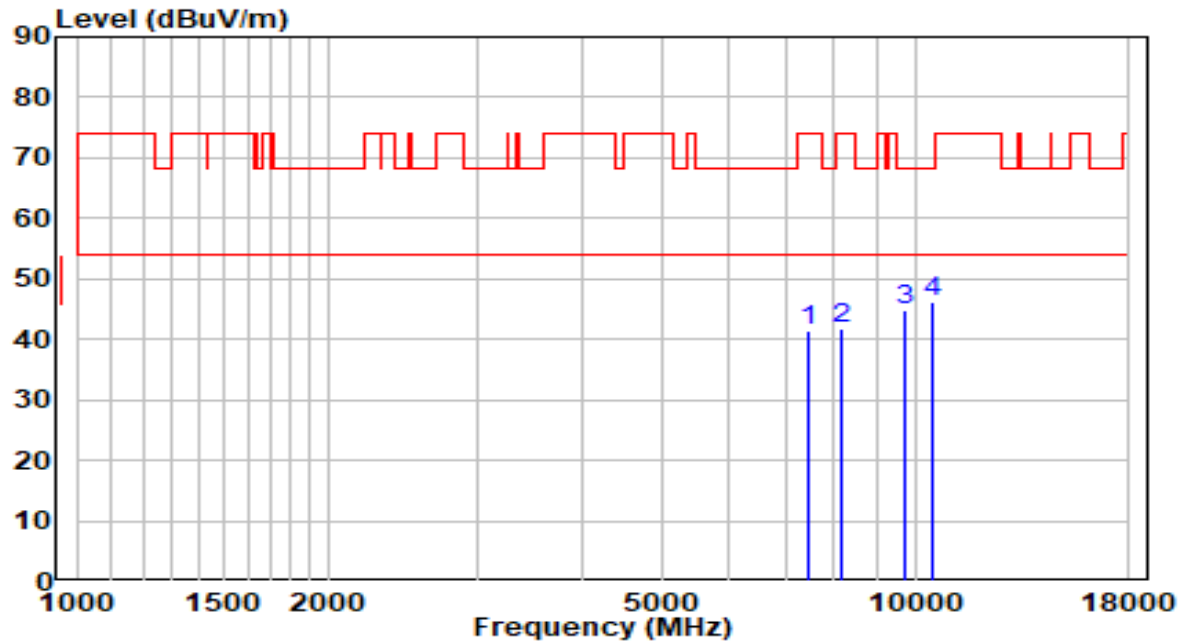


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7443.000	29.96	11.55	41.51	-32.49	74.00	Peak
2	8140.000	29.11	12.51	41.62	-32.38	74.00	Peak
3	9704.000	30.01	14.80	44.81	-23.39	68.20	Peak
4	* 10511.500	29.01	17.09	46.10	-22.10	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-21
Factor	BBHA 9120D	Temp. / Humidity	26.9°C/50%
Polarity	Vertical	Site / Test Engineer	AC1 / Peter Xu
Test Mode	Transmit by 802.11ac-VHT80 at Channel 5210MHz - CDD Mode	Test Voltage	110V/60Hz

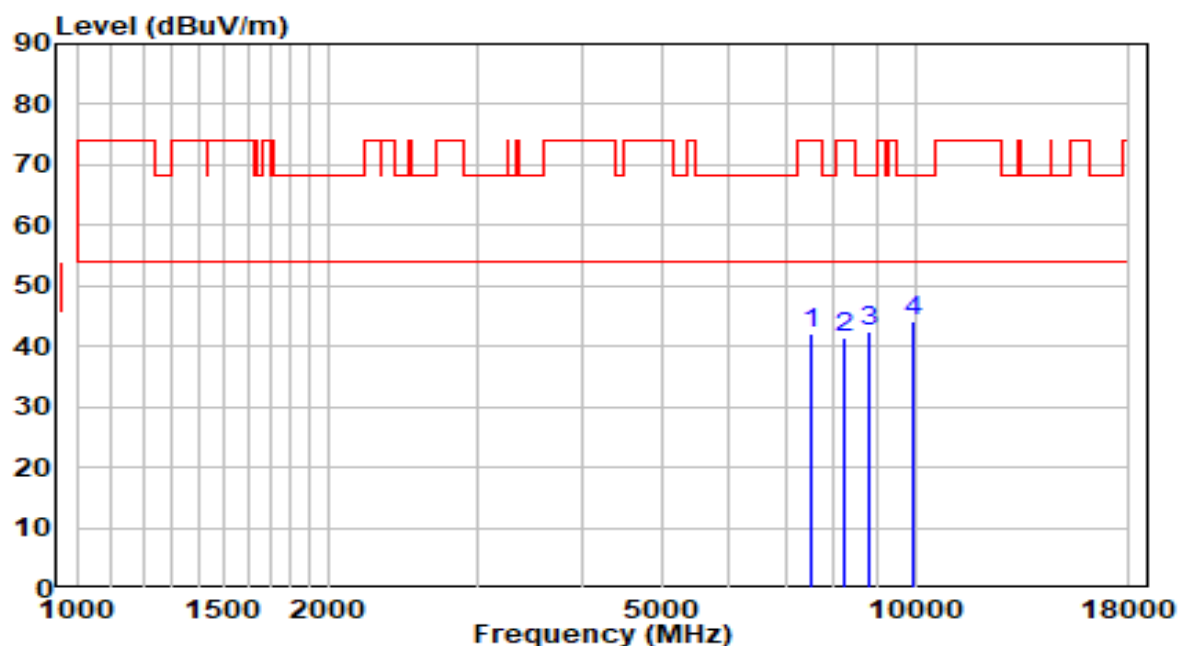


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7502.500	30.46	11.72	42.18	-31.82	74.00	Peak
2	8242.000	28.90	12.49	41.39	-32.61	74.00	Peak
3	8828.500	29.06	13.26	42.32	-25.88	68.20	Peak
4	* 9959.000	28.81	15.28	44.10	-24.10	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-21
Factor	BBHA 9120D	Temp. / Humidity	26.9°C/50%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT80 at Channel 5290MHz - CDD Mode	Test Voltage	110V/60Hz

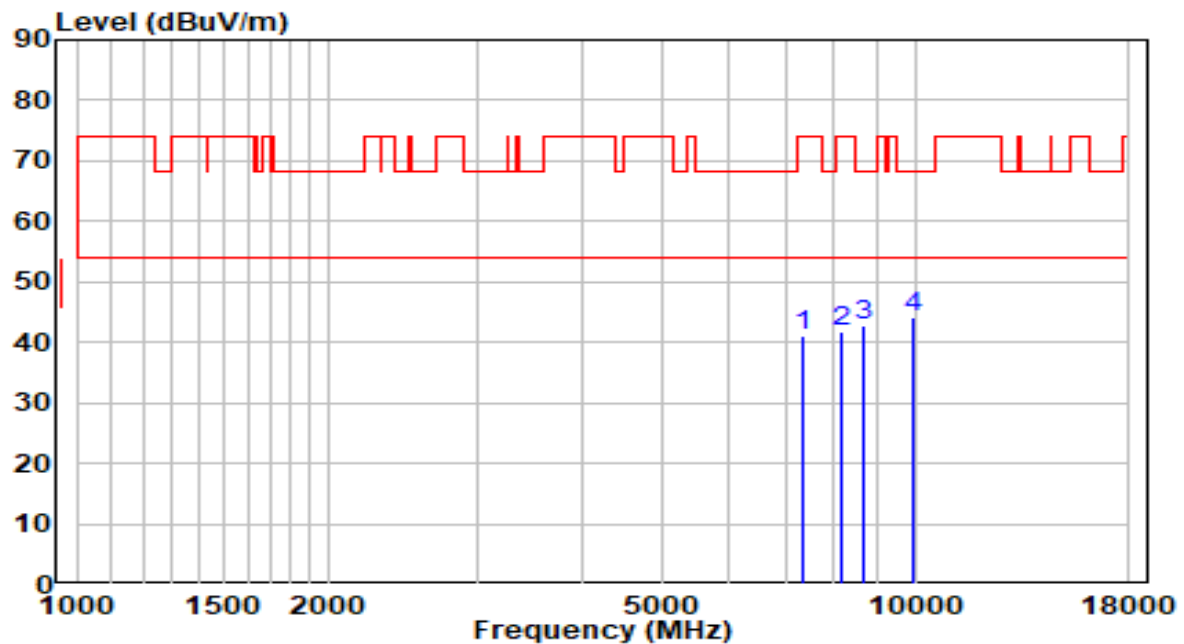


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7332.500	29.80	11.24	41.04	-32.96	74.00	Peak
2	8182.500	29.13	12.50	41.63	-32.37	74.00	Peak
3	8675.500	30.02	12.88	42.91	-25.29	68.20	Peak
4	* 9916.500	29.02	15.20	44.22	-23.98	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-21
Factor	BBHA 9120D	Temp. / Humidity	26.9°C/50%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT80 at Channel 5290MHz - CDD Mode	Test Voltage	110V/60Hz

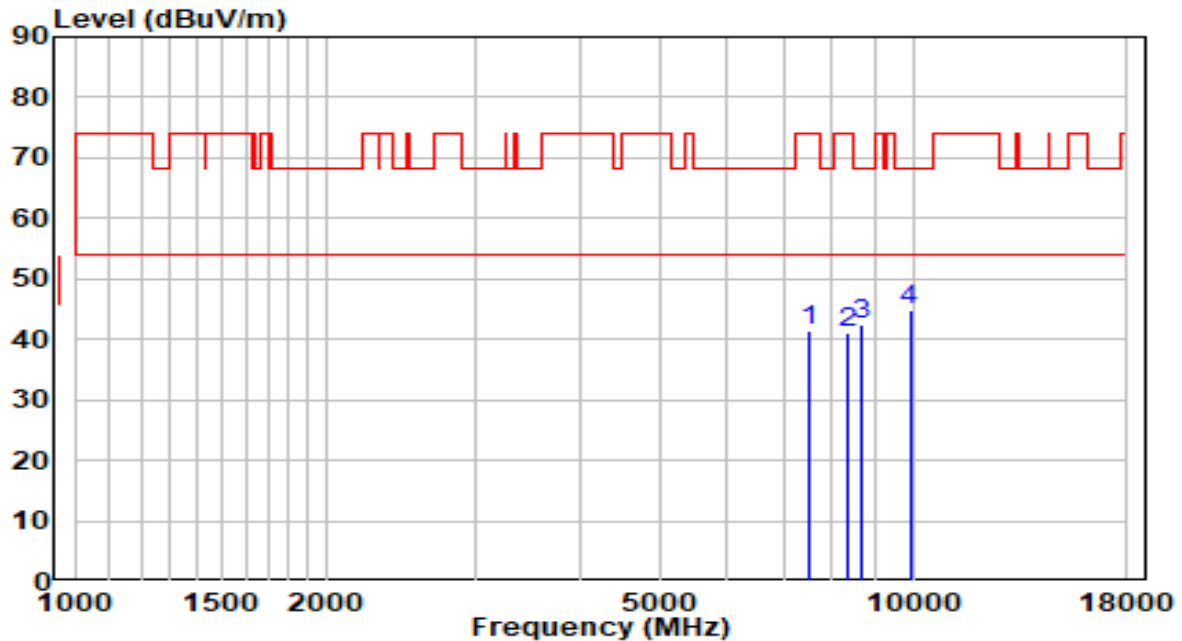


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7494.000	29.79	11.70	41.49	-32.51	74.00	Peak
2	8327.000	28.49	12.48	40.97	-33.03	74.00	Peak
3	8675.500	29.68	12.88	42.57	-25.63	68.20	Peak
4	* 9908.000	29.60	15.19	44.78	-23.42	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-21
Factor	BBHA 9120D	Temp. / Humidity	26.9°C/50%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT80 at Channel 5530MHz - CDD Mode	Test Voltage	110V/60Hz

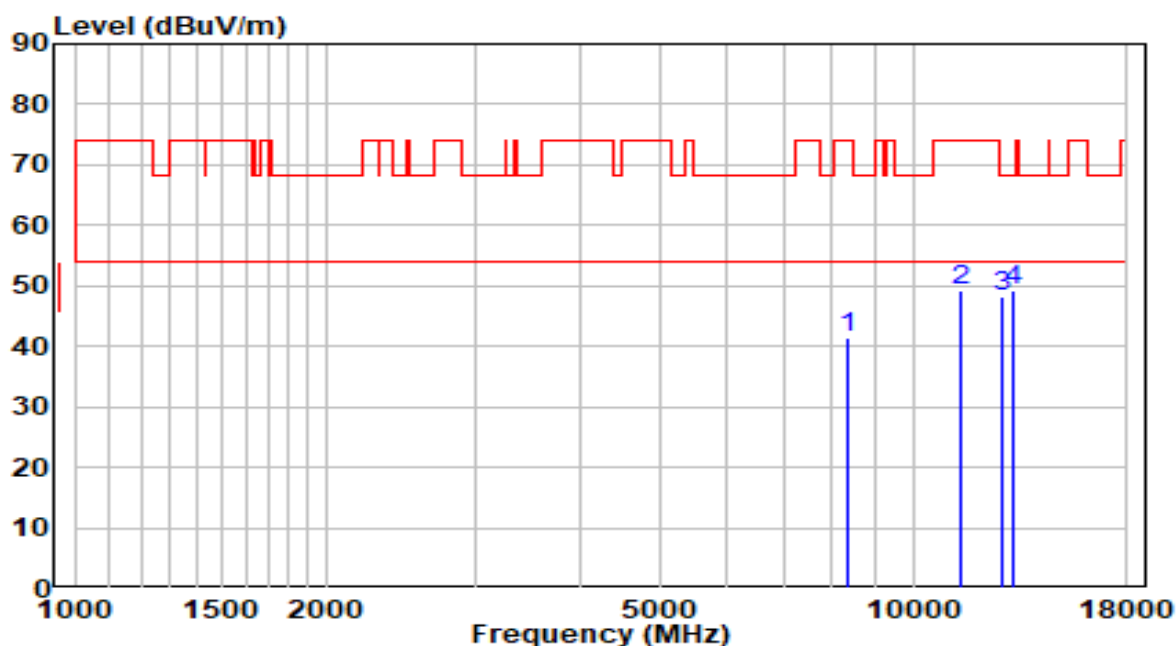


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	8361.000	28.91	12.48	41.39	-32.61	74.00	Peak
2	11378.500	30.90	18.29	49.19	-24.81	74.00	Peak
3	12755.500	29.58	18.61	48.20	-20.00	68.20	Peak
4	* 13206.000	29.38	19.81	49.19	-19.01	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-21
Factor	BBHA 9120D	Temp. / Humidity	26.9°C/50%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT80 at Channel 5530MHz - CDD Mode	Test Voltage	110V/60Hz

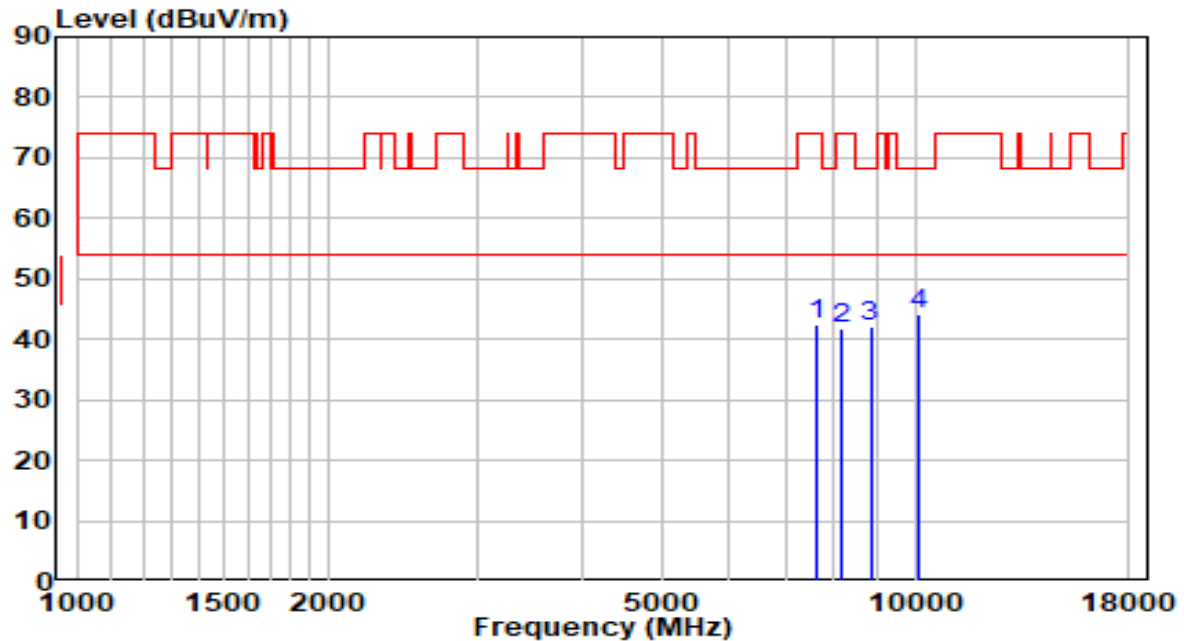


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7638.500	30.39	11.94	42.33	-31.67	74.00	Peak
2	8165.500	29.19	12.51	41.69	-32.31	74.00	Peak
3	8845.500	28.93	13.30	42.23	-25.97	68.20	Peak
4	* 10112.000	28.36	15.74	44.11	-24.09	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-21
Factor	BBHA 9120D	Temp. / Humidity	26.9°C/50%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT80 at Channel 5690MHz - CDD Mode	Test Voltage	110V/60Hz

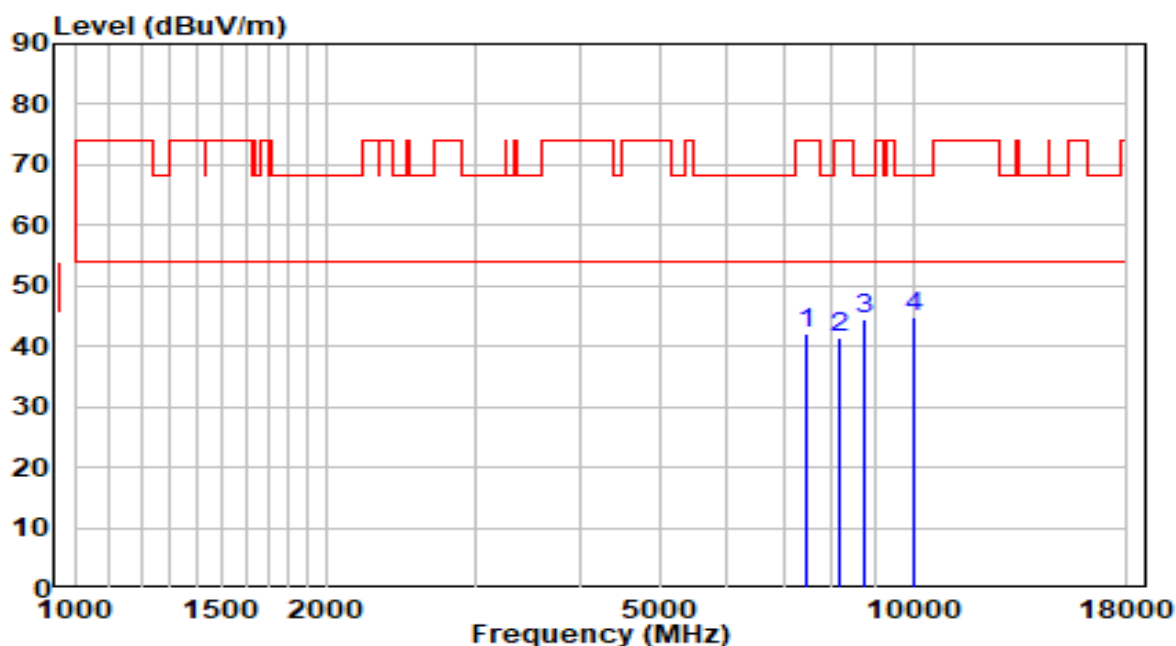


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7485.500	30.57	11.67	42.24	-31.76	74.00	Peak
2	8174.000	28.88	12.50	41.39	-32.61	74.00	Peak
3	8743.500	31.32	13.05	44.37	-23.83	68.20	Peak
4	* 10052.500	29.31	15.54	44.85	-23.35	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-21
Factor	BBHA 9120D	Temp. / Humidity	26.9°C/50%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT80 at Channel 5690MHz - CDD Mode	Test Voltage	110V/60Hz

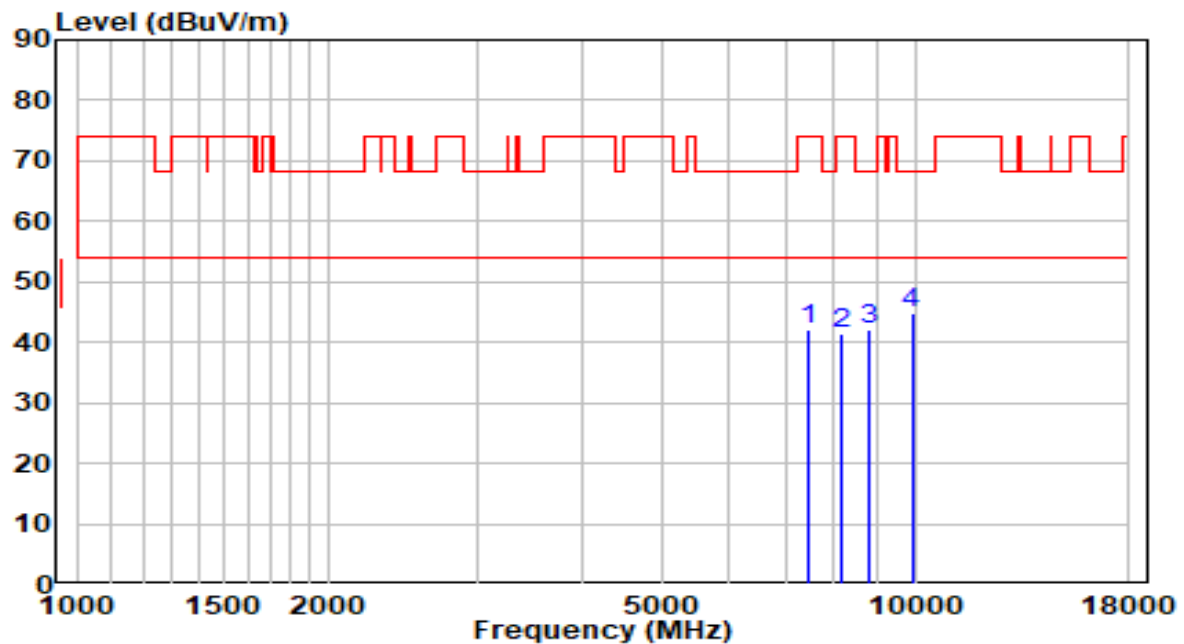


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7451.500	30.43	11.58	42.01	-31.99	74.00	Peak
2	8165.500	28.95	12.51	41.45	-32.55	74.00	Peak
3	8811.500	28.93	13.22	42.14	-26.06	68.20	Peak
4	* 9908.000	29.55	15.19	44.74	-23.46	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-21
Factor	BBHA 9120D	Temp. / Humidity	26.9°C/50%
Polarity	Horizontal	Site / Test Engineer	AC1 / Peter Xu
Test Mode	Transmit by 802.11ac-VHT80 at Channel 5775MHz - CDD Mode	Test Voltage	110V/60Hz

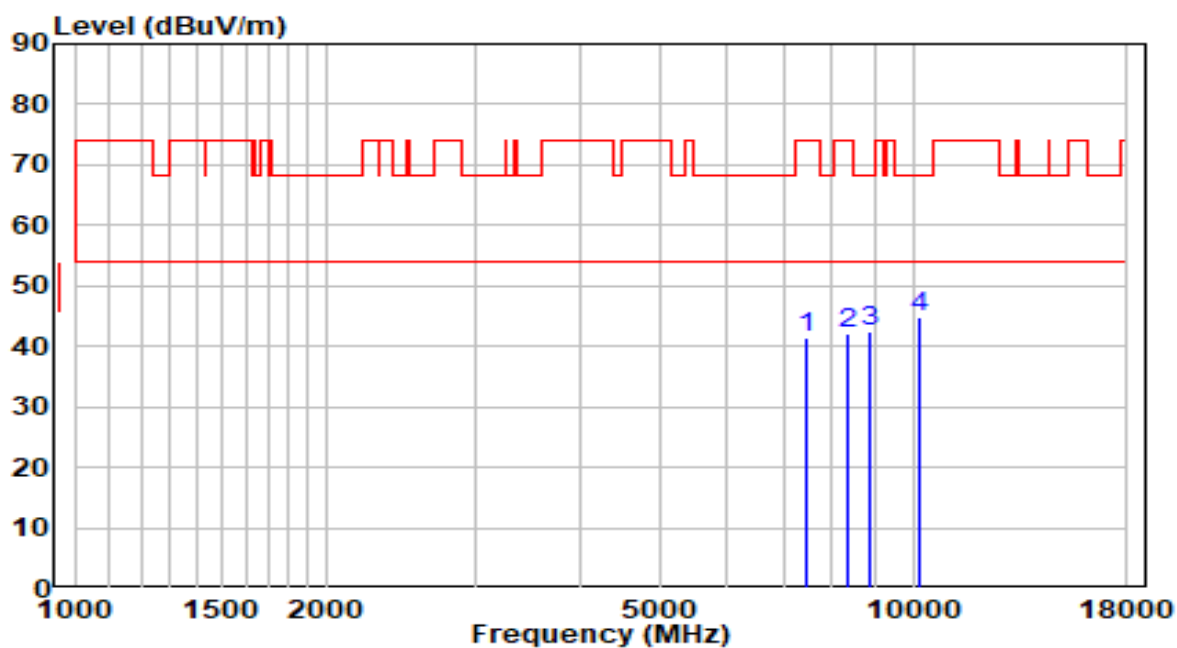


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	7443.000	29.89	11.55	41.45	-32.55	74.00	Peak
2	8378.000	29.57	12.47	42.05	-31.95	74.00	Peak
3	8888.000	29.16	13.41	42.56	-25.64	68.20	Peak
4	* 10154.500	28.90	15.89	44.79	-23.41	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-21
Factor	BBHA 9120D	Temp. / Humidity	26.9°C/50%
Polarity	Vertical	Site / Test Engineer	AC1 / Peter Xu
Test Mode	Transmit by 802.11ac-VHT80 at Channel 5775MHz - CDD Mode	Test Voltage	110V/60Hz

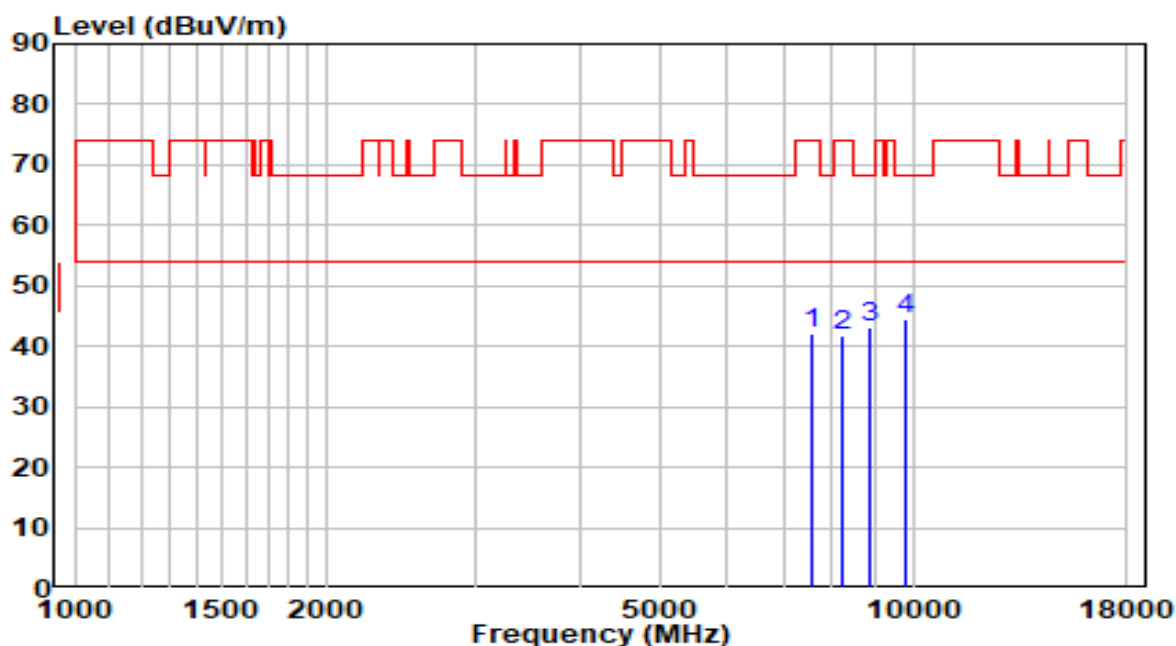


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7562.000	30.23	11.82	42.04	-31.96	74.00	Peak
2	8216.500	29.18	12.50	41.68	-32.32	74.00	Peak
3	8854.000	29.77	13.32	43.09	-25.11	68.20	Peak
4	* 9814.500	29.55	15.01	44.57	-23.63	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-21
Factor	BBHA 9120D	Temp. / Humidity	26.9°C/50%
Polarity	Horizontal	Site / Test Engineer	AC1 / Peter Xu
Test Mode	Transmit by 802.11ax-HE20 at Channel 5180MHz - CDD Mode	Test Voltage	110V/60Hz

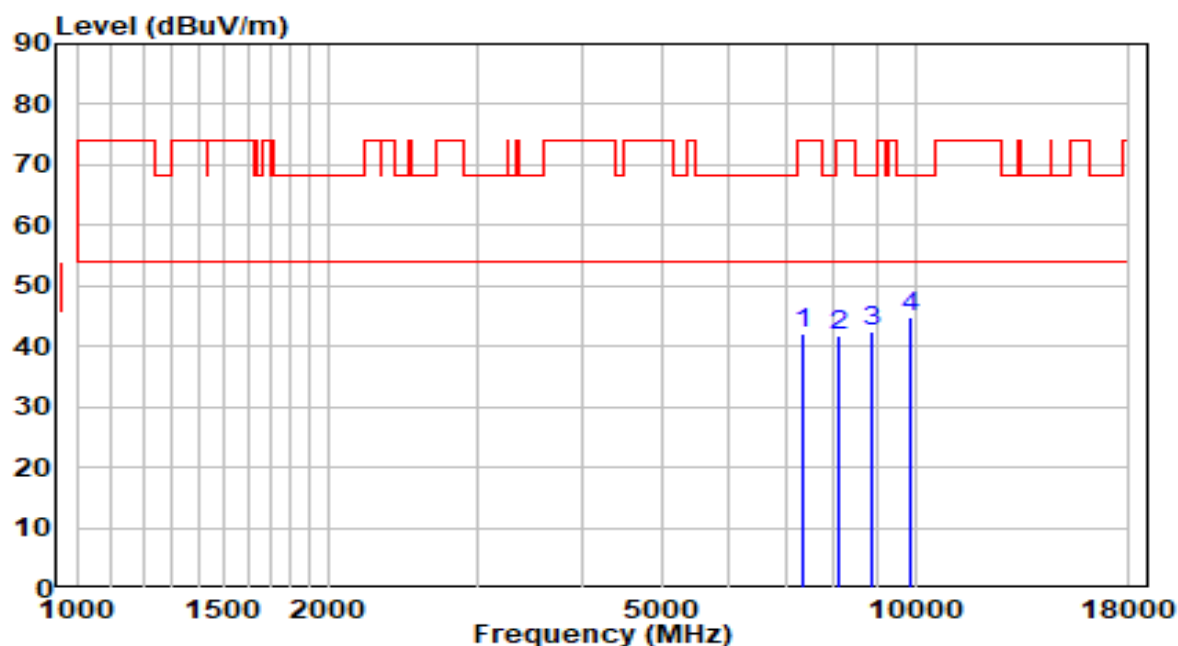


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7366.500	30.79	11.34	42.13	-31.87	74.00	Peak
2	8106.000	29.29	12.51	41.81	-32.19	74.00	Peak
3	8896.500	29.02	13.43	42.44	-25.76	68.20	Peak
4	* 9848.500	29.85	15.08	44.92	-23.28	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-21
Factor	BBHA 9120D	Temp. / Humidity	26.9°C/50%
Polarity	Vertical	Site / Test Engineer	AC1 / Peter Xu
Test Mode	Transmit by 802.11ax-HE20 at Channel 5180MHz - CDD Mode	Test Voltage	110V/60Hz

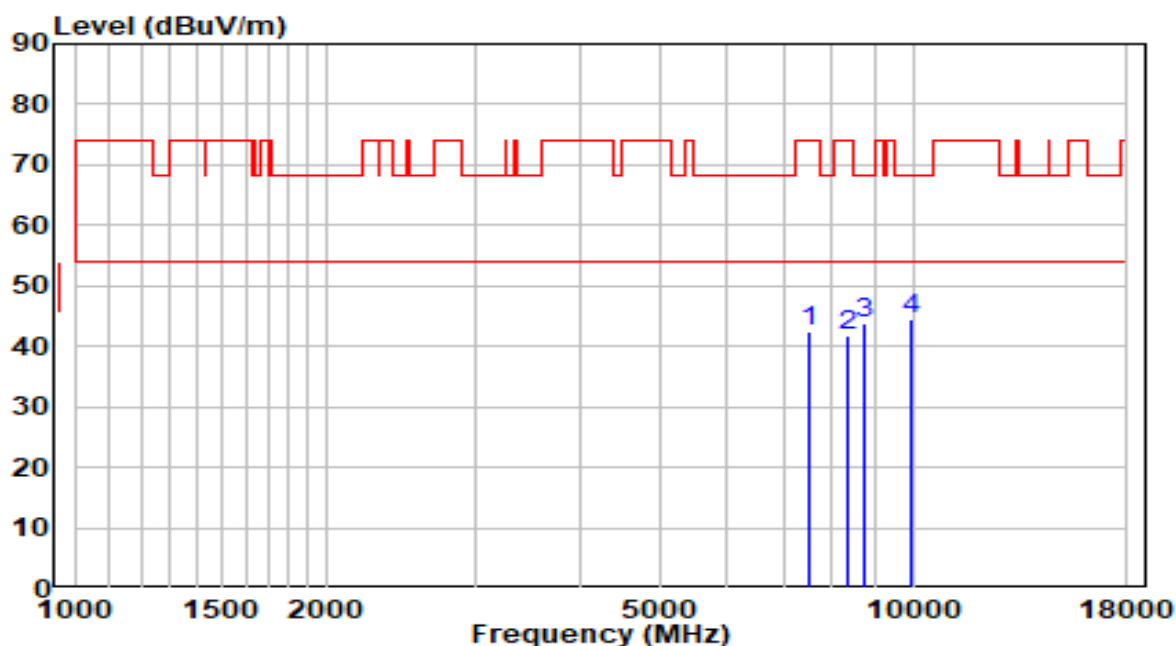


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7502.500	30.59	11.72	42.31	-31.69	74.00	Peak
2	8386.500	29.28	12.47	41.75	-32.25	74.00	Peak
3	8726.500	30.68	13.01	43.69	-24.51	68.20	Peak
4	* 9967.500	29.25	15.30	44.54	-23.66	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-21
Factor	BBHA 9120D	Temp. / Humidity	26.9°C/50%
Polarity	Horizontal	Site / Test Engineer	AC1 / Peter Xu
Test Mode	Transmit by 802.11ax-HE20 at Channel 5220MHz - CDD Mode	Test Voltage	110V/60Hz

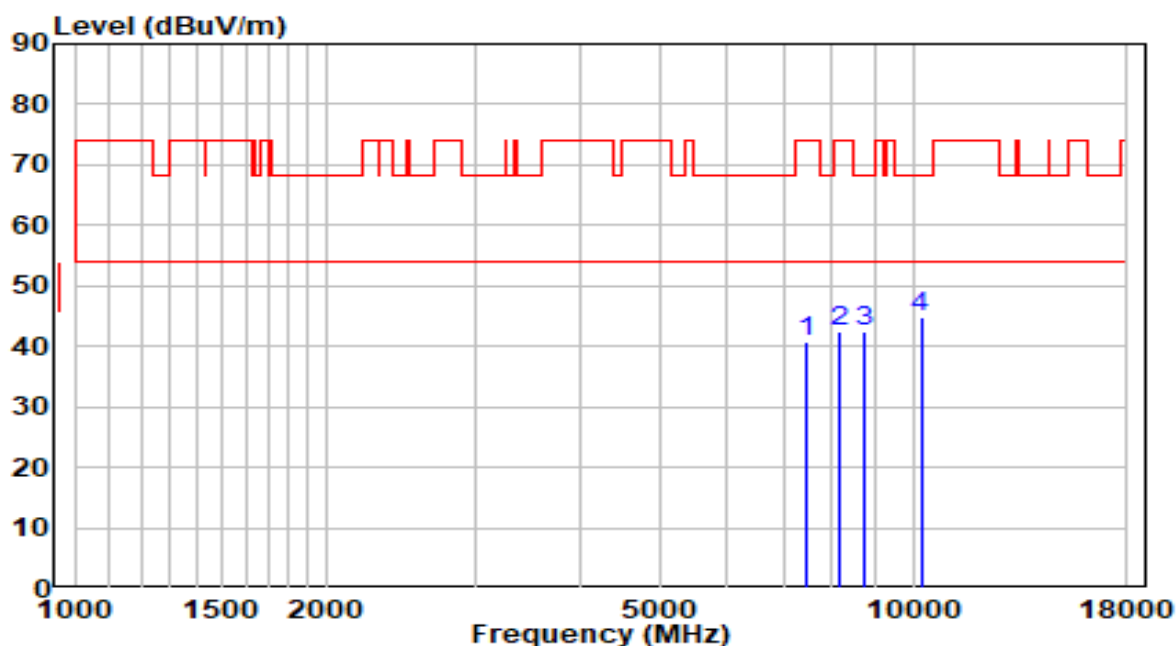


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7443.000	29.32	11.55	40.87	-33.13	74.00	Peak
2	8174.000	29.83	12.50	42.34	-31.66	74.00	Peak
3	8769.000	29.26	13.11	42.38	-25.82	68.20	Peak
4	* 10214.000	28.60	16.09	44.69	-23.51	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-21
Factor	BBHA 9120D	Temp. / Humidity	26.9°C/50%
Polarity	Vertical	Site / Test Engineer	AC1 / Peter Xu
Test Mode	Transmit by 802.11ax-HE20 at Channel 5220MHz - CDD Mode	Test Voltage	110V/60Hz

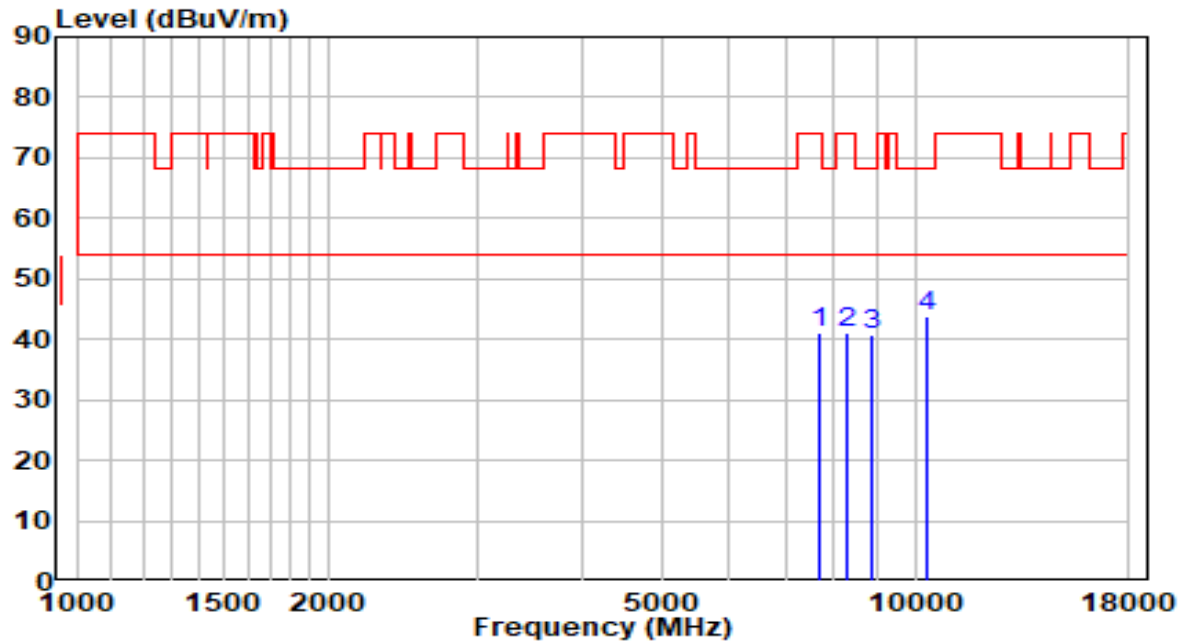


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7681.000	29.14	12.01	41.15	-32.85	74.00	Peak
2	8310.000	28.52	12.48	41.01	-32.99	74.00	Peak
3	8879.500	27.40	13.38	40.78	-27.42	68.20	Peak
4	* 10341.500	27.42	16.53	43.95	-24.25	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-21
Factor	BBHA 9120D	Temp. / Humidity	26.9°C/50%
Polarity	Horizontal	Site / Test Engineer	AC1 / Peter Xu
Test Mode	Transmit by 802.11ax-HE20 at Channel 5240MHz - CDD Mode	Test Voltage	110V/60Hz

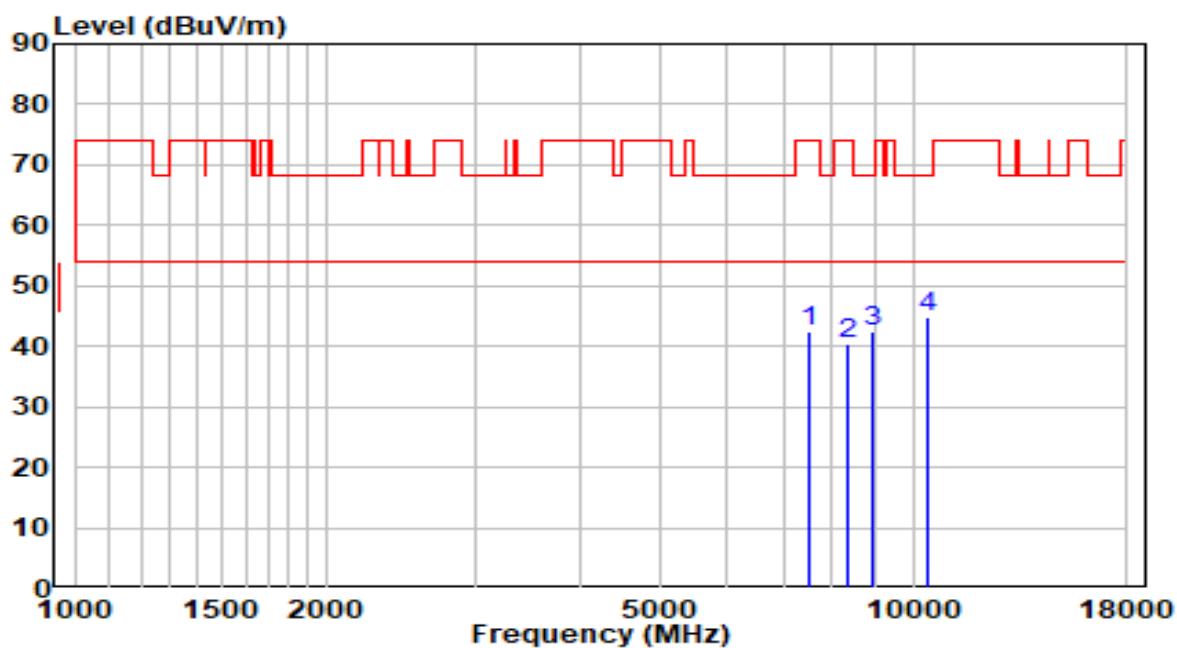


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7502.500	30.66	11.72	42.38	-31.62	74.00	Peak
2	8344.000	28.00	12.48	40.48	-33.52	74.00	Peak
3	8922.000	28.83	13.49	42.32	-25.88	68.20	Peak
4	* 10409.500	28.07	16.76	44.83	-23.37	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-21
Factor	BBHA 9120D	Temp. / Humidity	26.9°C/50%
Polarity	Vertical	Site / Test Engineer	AC1 / Peter Xu
Test Mode	Transmit by 802.11ax-HE20 at Channel 5240MHz - CDD Mode	Test Voltage	110V/60Hz

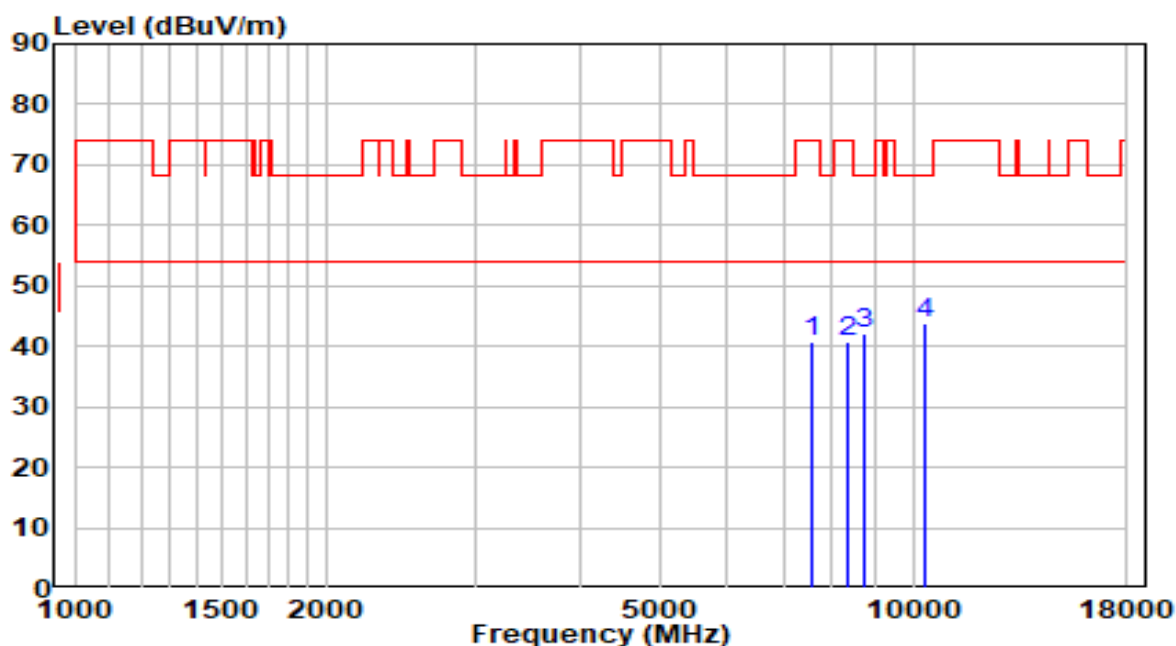


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7596.000	29.00	11.87	40.87	-33.13	74.00	Peak
2	8327.000	28.24	12.48	40.72	-33.28	74.00	Peak
3	8718.000	29.23	12.99	42.22	-25.98	68.20	Peak
4	* 10341.500	27.26	16.53	43.78	-24.42	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-21
Factor	BBHA 9120D	Temp. / Humidity	26.9°C/50%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE20 at Channel 5260MHz - CDD Mode	Test Voltage	110V/60Hz

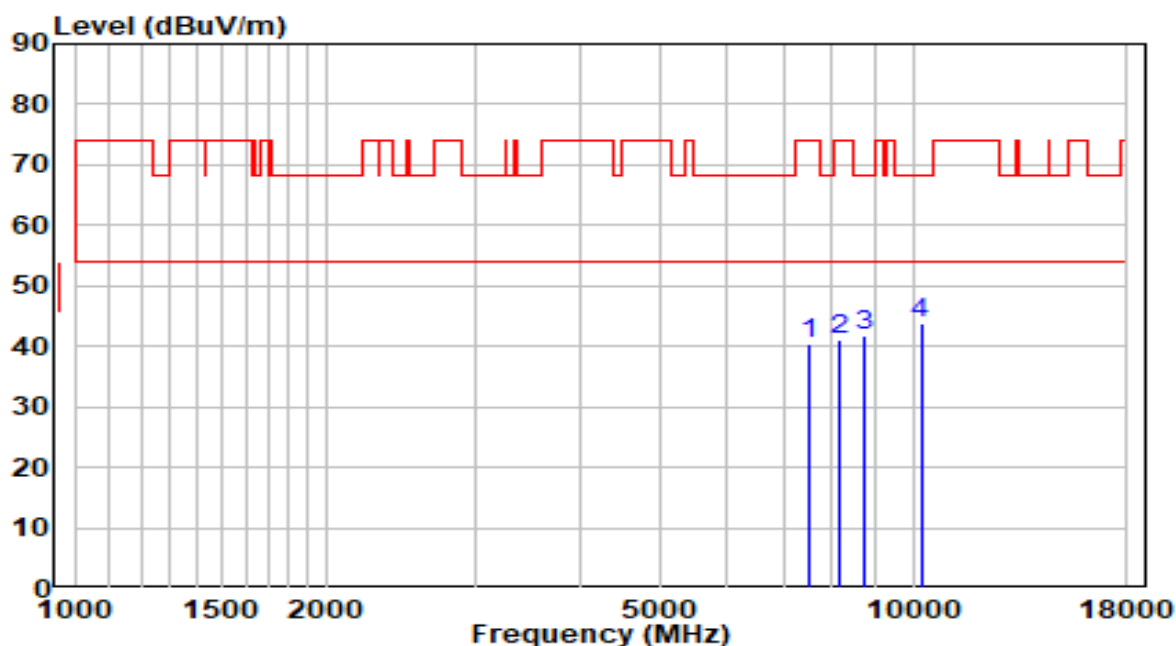


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7502.500	28.86	11.72	40.58	-33.42	74.00	Peak
2	8191.000	28.60	12.50	41.10	-32.90	74.00	Peak
3	8735.000	28.78	13.03	41.81	-26.39	68.20	Peak
4	* 10214.000	27.72	16.09	43.81	-24.39	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-21
Factor	BBHA 9120D	Temp. / Humidity	26.9°C/50%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE20 at Channel 5260MHz - CDD Mode	Test Voltage	110V/60Hz

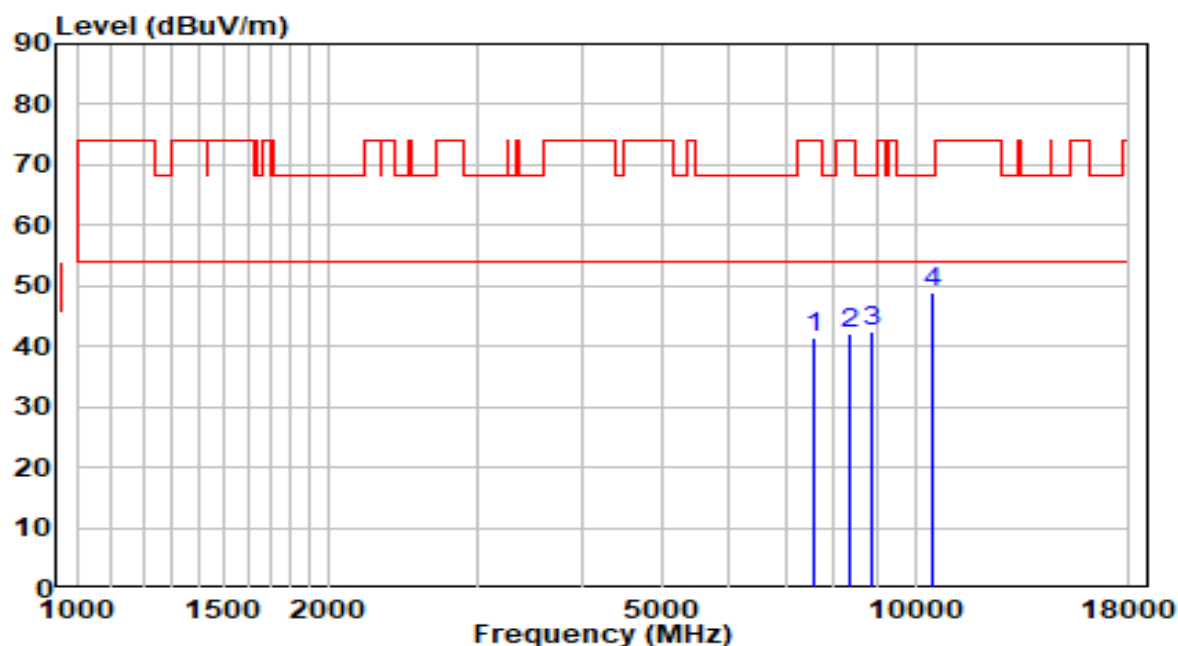


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7553.500	29.56	11.80	41.36	-32.64	74.00	Peak
2	8352.500	29.47	12.48	41.94	-32.06	74.00	Peak
3	8854.000	29.26	13.32	42.58	-25.62	68.20	Peak
4	* 10511.500	31.97	17.09	49.05	-19.15	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-21
Factor	BBHA 9120D	Temp. / Humidity	26.9°C/50%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE20 at Channel 5300MHz - CDD Mode	Test Voltage	110V/60Hz

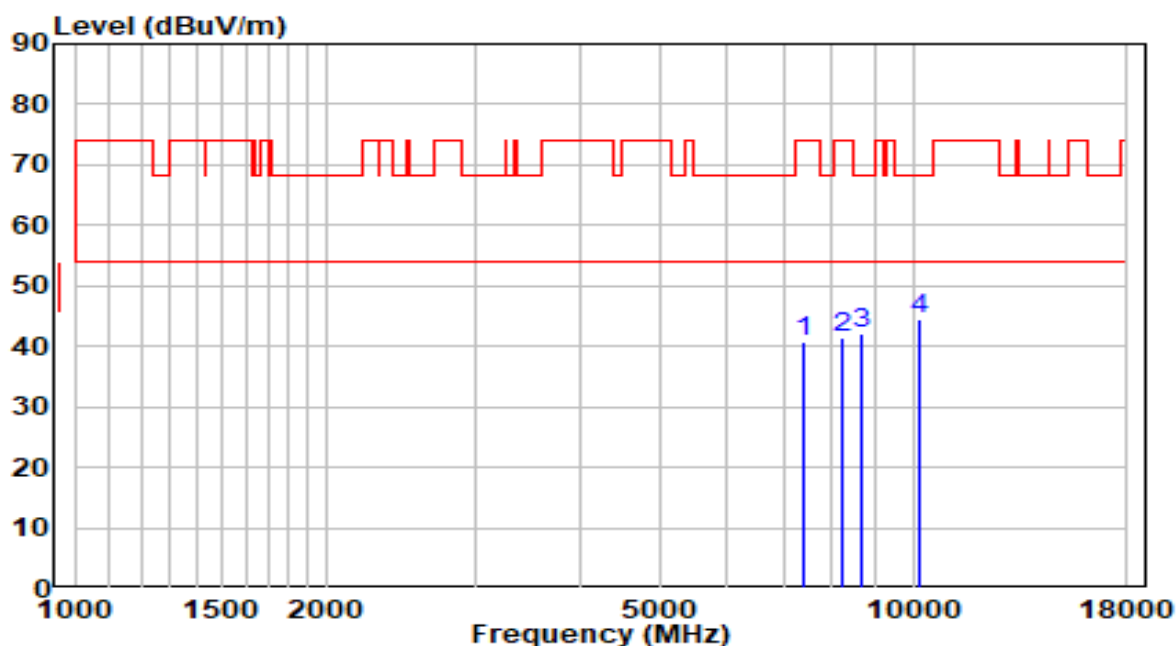


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7426.000	29.10	11.51	40.60	-33.40	74.00	Peak
2	8242.000	29.00	12.49	41.49	-32.51	74.00	Peak
3	8701.000	29.23	12.95	42.17	-26.03	68.20	Peak
4	* 10171.500	28.55	15.95	44.49	-23.71	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-21
Factor	BBHA 9120D	Temp. / Humidity	26.9°C/50%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE20 at Channel 5300MHz - CDD Mode	Test Voltage	110V/60Hz

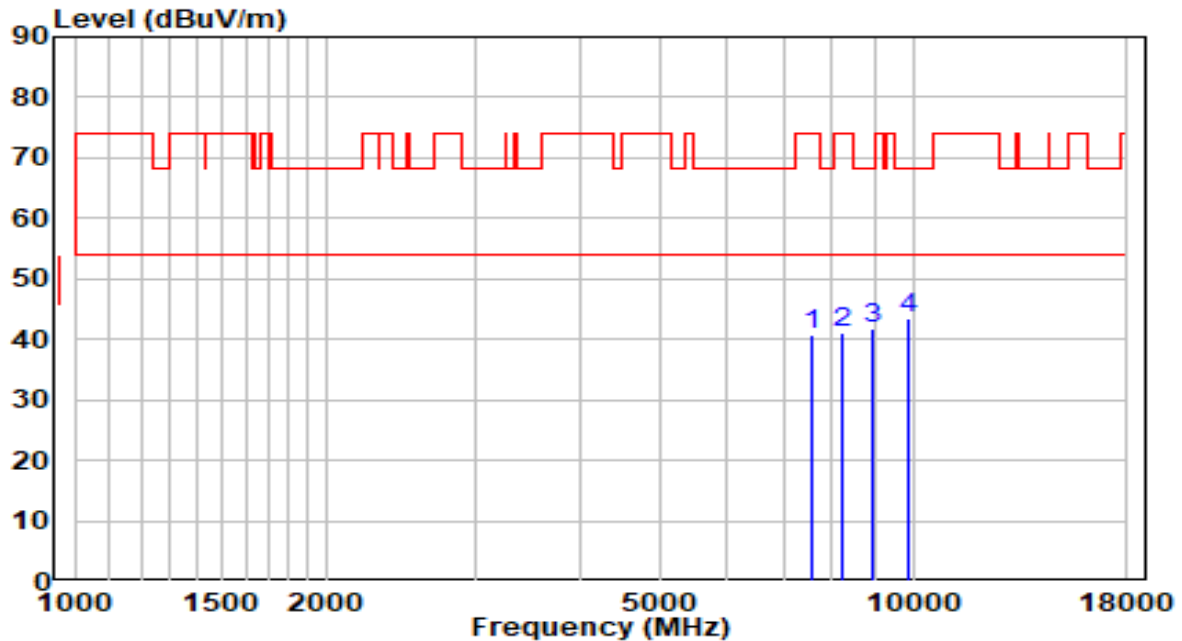


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7596.000	28.75	11.87	40.62	-33.38	74.00	Peak
2	8208.000	28.67	12.50	41.17	-32.83	74.00	Peak
3	8922.000	28.25	13.49	41.74	-26.46	68.20	Peak
4	* 9857.000	28.27	15.09	43.36	-24.84	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-21
Factor	BBHA 9120D	Temp. / Humidity	26.9°C/50%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE20 at Channel 5320MHz - CDD Mode	Test Voltage	110V/60Hz

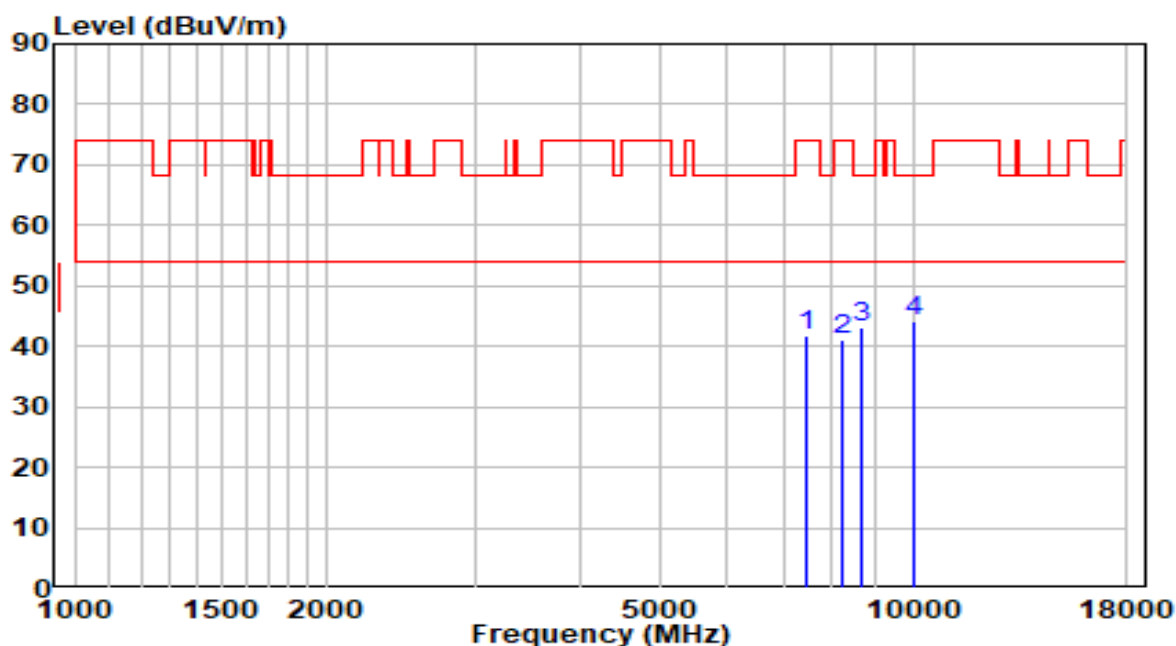


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7477.000	30.00	11.65	41.65	-32.35	74.00	Peak
2	8225.000	28.54	12.50	41.04	-32.96	74.00	Peak
3	8650.000	30.19	12.82	43.01	-25.19	68.20	Peak
4	* 10027.000	28.70	15.45	44.15	-24.05	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX1800 Wi-Fi 6 訊號延伸器	Date of Test	2020-07-21
Factor	BBHA 9120D	Temp. / Humidity	26.9°C/50%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE20 at Channel 5320MHz - CDD Mode	Test Voltage	110V/60Hz

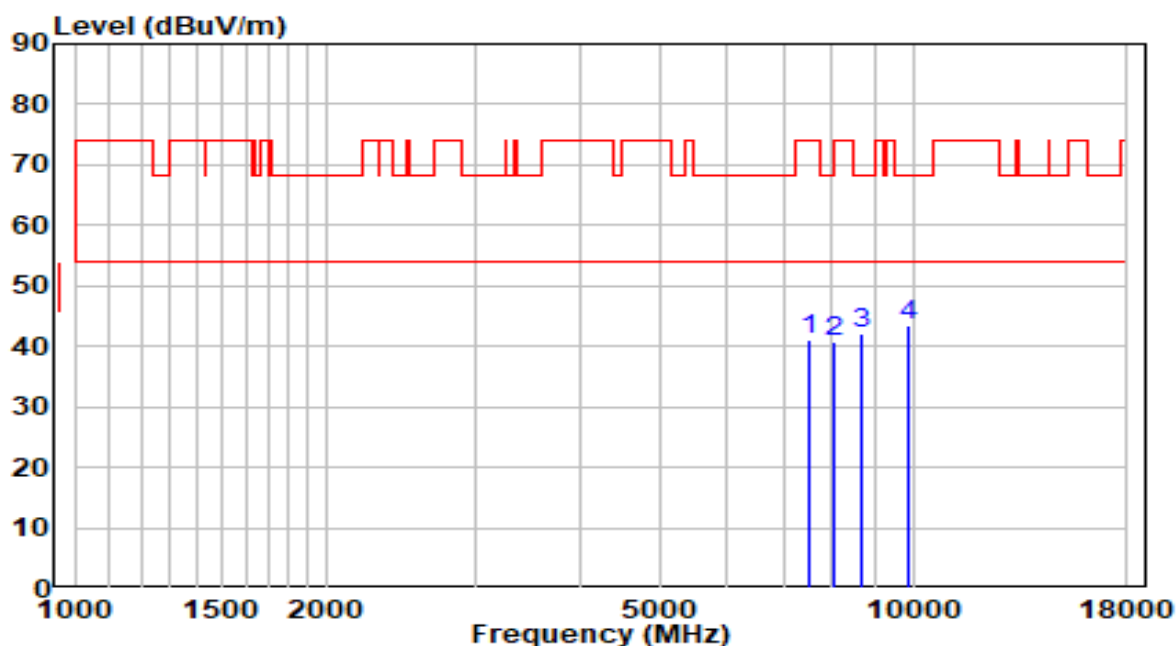

No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7502.500	29.31	11.72	41.03	-32.97	74.00	Peak
2	8072.000	28.11	12.52	40.63	-33.37	74.00	Peak
3	8684.000	29.36	12.91	42.26	-25.94	68.20	Peak
4	* 9882.500	28.17	15.14	43.31	-24.89	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.