

Test Mode: IEEE 802.11ax(HE80) - W52

Test Voltage	Normal Voltage	Remarks
Test Frequency (MHz)	5210	Low/Mid/High of test frequency range
Antenna Power (Conducted) (mW/MHz)	0.5433	Limit ≤ 2.5 mW/MHz
Antenna Power (Rated) (mW/MHz)	0.54	-
Antenna Power Tolerance (%)	+0.61	Limit + 20% ~ - 80%
EIRP (mW/MHz)	2.4266	Limit ≤ 2.5 mW/MHz

Note:

1. Antenna power tolerance = (conducted antenna power - rated antenna power)/rated antenna power * 100%
2. EIRP (dBm/MHz) = conducted antenna power (dBm/MHz) + max. antenna gain (dBi)
3. Antenna Power value = SA measurement value (Include correction factor and cable loss)
Correction factor = $10 \log (X)$
X = the total number of antennas

CH42




Test Mode: IEEE 802.11be(EHT20) - W52

Test Voltage	Normal Voltage			Remarks
Test Frequency (MHz)	5180	5200	5240	Low/Mid/High of test frequency range
Antenna Power (Conducted) (mW/MHz)	2.0845	2.0893	2.2080	Limit ≤ 10 mW/MHz
Antenna Power (Rated) (mW/MHz)	2.21			-
Antenna Power Tolerance (%)	-5.68	-5.46	-0.09	Limit + 20% ~ - 80%
EIRP (mW/MHz)	9.3111	9.3325	9.8628	Limit ≤ 10 mW/MHz

Note:

1. Antenna power tolerance = (conducted antenna power - rated antenna power)/rated antenna power * 100%
2. EIRP (dBm/MHz) = conducted antenna power (dBm/MHz) + max. antenna gain (dBi)
3. Antenna Power value = SA measurement value (Include correction factor and cable loss)
Correction factor = 10 log (X)
X = the total number of antennas

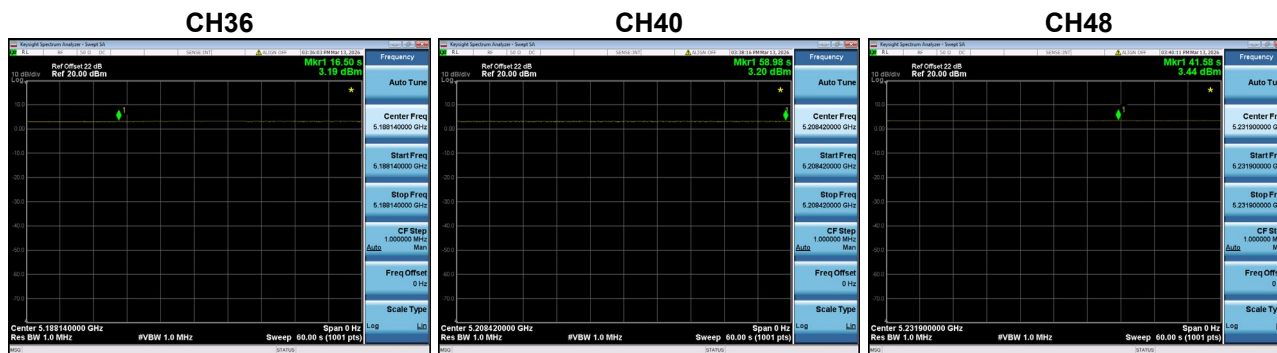


Test Mode: IEEE 802.11be(EHT40) - W52

Test Voltage	Normal Voltage		Remarks
Test Frequency (MHz)	5190	5230	Low/Mid/High of test frequency range
Antenna Power (Conducted) (mW/MHz)	0.9931	1.0423	Limit ≤ 5 mW/MHz
Antenna Power (Rated) (mW/MHz)	1.04		-
Antenna Power Tolerance (%)	-4.51	+0.22	Limit + 20% ~ - 80%
EIRP (mW/MHz)	4.4361	4.6559	Limit ≤ 5 mW/MHz

Note:

1. Antenna power tolerance = (conducted antenna power - rated antenna power)/rated antenna power * 100%
2. EIRP (dBm/MHz) = conducted antenna power (dBm/MHz) + max. antenna gain (dBi)
3. Antenna Power value = SA measurement value (Include correction factor and cable loss)
Correction factor = 10 log (X)
X = the total number of antennas

CH38

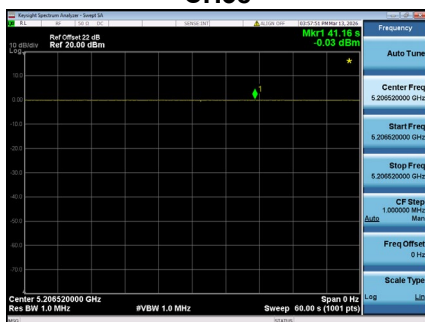

CH46




Test Mode: IEEE 802.11be(EHT80) - W52

Test Voltage	Normal Voltage	Remarks
Test Frequency (MHz)	5210	Low/Mid/High of test frequency range
Antenna Power (Conducted) (mW/MHz)	0.4966	Limit ≤ 2.5 mW/MHz
Antenna Power (Rated) (mW/MHz)	0.50	-
Antenna Power Tolerance (%)	-0.68	Limit + 20% ~ - 80%
EIRP (mW/MHz)	2.2182	Limit ≤ 2.5 mW/MHz

Note:

1. Antenna power tolerance = (conducted antenna power - rated antenna power)/rated antenna power * 100%
2. EIRP (dBm/MHz) = conducted antenna power (dBm/MHz) + max. antenna gain (dBi)
3. Antenna Power value = SA measurement value (Include correction factor and cable loss)
Correction factor = 10 log (X)
X = the total number of antennas

CH42

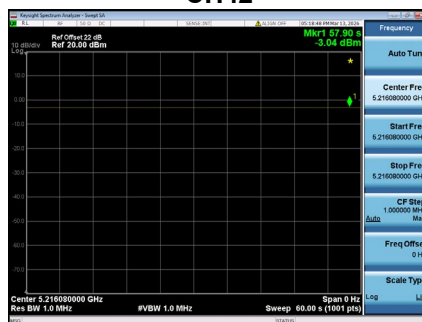

Test Mode:	IEEE 802.11a - W53
------------	--------------------

Test Voltage	Normal Voltage			Remarks
Test Frequency (MHz)	5260	5300	5320	Low/Mid/High of test frequency range
Antenna Power (Conducted) (mW/MHz)	2.0045	1.9724	2.0989	Limit ≤ 10 mW/MHz
Antenna Power (Rated) (mW/MHz)	2.10			-
Antenna Power Tolerance (%)	-4.55	-6.08	-0.05	Limit + 20% ~ - 80%
EIRP (mW/MHz)	8.9536	8.8105	9.3756	Limit ≤ 10 mW/MHz (With TPC)

Note:

1. Antenna power tolerance = (conducted antenna power - rated antenna power)/rated antenna power * 100%
2. EIRP (dBm/MHz) = conducted antenna power (dBm/MHz) + max. antenna gain (dBi)
3. Antenna Power value = SA measurement value (Include correction factor and cable loss)
Correction factor = 10 log (X)
X = the total number of antennas

CH52



CH60



CH64



Test Mode: IEEE 802.11ac(VHT20) - W53

Test Voltage	Normal Voltage			Remarks
Test Frequency (MHz)	5260	5300	5320	Low/Mid/High of test frequency range
Antenna Power (Conducted) (mW/MHz)	2.0864	2.0893	2.2182	Limit ≤ 10 mW/MHz
Antenna Power (Rated) (mW/MHz)	2.22			-
Antenna Power Tolerance (%)	-6.02	-5.89	-0.08	Limit + 20% ~ - 80%
EIRP (mW/MHz)	9.3197	9.3325	9.9083	Limit ≤ 10 mW/MHz (With TPC)

Note:

1. Antenna power tolerance = (conducted antenna power - rated antenna power)/rated antenna power * 100%
2. EIRP (dBm/MHz) = conducted antenna power (dBm/MHz) + max. antenna gain (dBi)
3. Antenna Power value = SA measurement value (Include correction factor and cable loss)
Correction factor = $10 \log (X)$
X = the total number of antennas


CH52



CH60



CH64

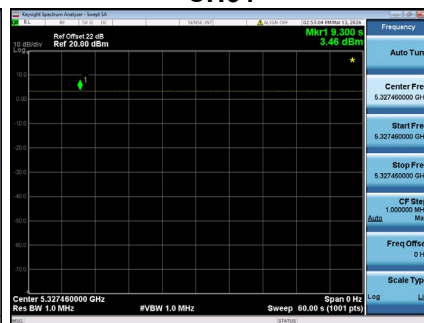

Test Mode: IEEE 802.11ac(VHT40) - W53

Test Voltage	Normal Voltage		Remarks
Test Frequency (MHz)	5270	5310	Low/Mid/High of test frequency range
Antenna Power (Conducted) (mW/MHz)	1.0666	1.0889	Limit ≤ 5 mW/MHz
Antenna Power (Rated) (mW/MHz)	1.09		-
Antenna Power Tolerance (%)	-2.15	-0.10	Limit + 20% ~ - 80%
EIRP (mW/MHz)	4.7643	4.8641	Limit ≤ 5 mW/MHz (With TPC)

Note:

1. Antenna power tolerance = (conducted antenna power - rated antenna power)/rated antenna power * 100%
2. EIRP (dBm/MHz) = conducted antenna power (dBm/MHz) + max. antenna gain (dBi)
3. Antenna Power value = SA measurement value (Include correction factor and cable loss)
Correction factor = 10 log (X)
X = the total number of antennas

CH54



CH62




Test Mode: IEEE 802.11ac(VHT80) - W53

Test Voltage	Normal Voltage	Remarks
Test Frequency (MHz)	5290	Low/Mid/High of test frequency range
Antenna Power (Conducted) (mW/MHz)	0.4853	Limit ≤ 2.5 mW/MHz
Antenna Power (Rated) (mW/MHz)	0.49	-
Antenna Power Tolerance (%)	-0.96	Limit + 20% ~ - 80%
EIRP (mW/MHz)	2.1677	Limit ≤ 2.5 mW/MHz (With TPC)

Note:

1. Antenna power tolerance = (conducted antenna power - rated antenna power)/rated antenna power * 100%
2. EIRP (dBm/MHz) = conducted antenna power (dBm/MHz) + max. antenna gain (dBi)
3. Antenna Power value = SA measurement value (Include correction factor and cable loss)
Correction factor = 10 log (X)
X = the total number of antennas

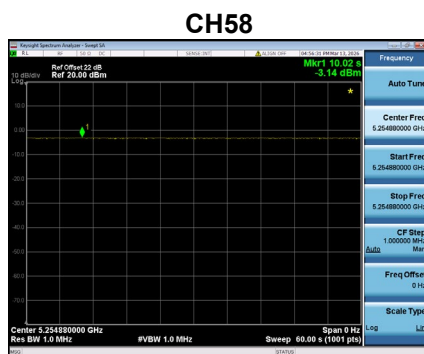

Test Mode: IEEE 802.11ax(HE20) - W53

Test Voltage	Normal Voltage			Remarks
Test Frequency (MHz)	5260	5300	5320	Low/Mid/High of test frequency range
Antenna Power (Conducted) (mW/MHz)	1.9815	2.2029	2.1038	Limit ≤ 10 mW/MHz
Antenna Power (Rated) (mW/MHz)	2.20			-
Antenna Power Tolerance (%)	-9.93	+0.13	-4.37	Limit + 20% ~ - 80%
EIRP (mW/MHz)	8.8512	9.8401	9.3972	Limit ≤ 10 mW/MHz (With TPC)

Note:

1. Antenna power tolerance = (conducted antenna power - rated antenna power)/rated antenna power * 100%
2. EIRP (dBm/MHz) = conducted antenna power (dBm/MHz) + max. antenna gain (dBi)
3. Antenna Power value = SA measurement value (Include correction factor and cable loss)
Correction factor = 10 log (X)
X = the total number of antennas



Test Mode:	IEEE 802.11ax(HE40) - W53
------------	---------------------------

Test Voltage	Normal Voltage		Remarks
Test Frequency (MHz)	5270	5310	Low/Mid/High of test frequency range
Antenna Power (Conducted) (mW/MHz)	1.0116	1.0447	Limit ≤ 5 mW/MHz
Antenna Power (Rated) (mW/MHz)	1.04		-
Antenna Power Tolerance (%)	-2.73	+0.45	Limit + 20% ~ - 80%
EIRP (mW/MHz)	4.5186	4.6666	Limit ≤ 5 mW/MHz (With TPC)

Note:

1. Antenna power tolerance = (conducted antenna power - rated antenna power)/rated antenna power * 100%
2. EIRP (dBm/MHz) = conducted antenna power (dBm/MHz) + max. antenna gain (dBi)
3. Antenna Power value = SA measurement value (Include correction factor and cable loss)
Correction factor = $10 \log (X)$
X = the total number of antennas

CH54



CH62




Test Mode:	IEEE 802.11ax(HE80) - W53
------------	---------------------------

Test Voltage	Normal Voltage	Remarks
Test Frequency (MHz)	5290	Low/Mid/High of test frequency range
Antenna Power (Conducted) (mW/MHz)	0.5408	Limit ≤ 2.5 mW/MHz
Antenna Power (Rated) (mW/MHz)	0.54	-
Antenna Power Tolerance (%)	+0.15	Limit + 20% ~ - 80%
EIRP (mW/MHz)	2.4155	Limit ≤ 2.5 mW/MHz (With TPC)

Note:

1. Antenna power tolerance = (conducted antenna power - rated antenna power)/rated antenna power * 100%
2. EIRP (dBm/MHz) = conducted antenna power (dBm/MHz) + max. antenna gain (dBi)
3. Antenna Power value = SA measurement value (Include correction factor and cable loss)
Correction factor = $10 \log (X)$
X = the total number of antennas

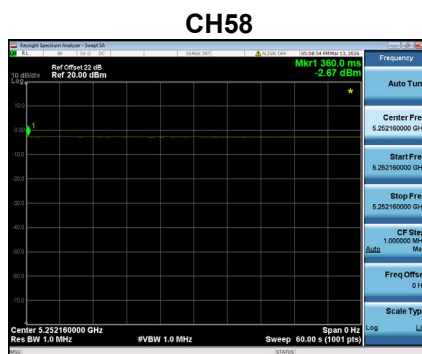


Test Mode:	IEEE 802.11be(EHT20) - W53
------------	----------------------------

Test Voltage	Normal Voltage			Remarks
Test Frequency (MHz)	5260	5300	5320	Low/Mid/High of test frequency range
Antenna Power (Conducted) (mW/MHz)	1.9962	1.9861	2.0749	Limit ≤ 10 mW/MHz
Antenna Power (Rated) (mW/MHz)	2.07			-
Antenna Power Tolerance (%)	-3.57	-4.05	+0.24	Limit + 20% ~ - 80%
EIRP (mW/MHz)	8.9166	8.8716	9.2683	Limit ≤ 10 mW/MHz (With TPC)

Note:

1. Antenna power tolerance = (conducted antenna power - rated antenna power)/rated antenna power * 100%
2. EIRP (dBm/MHz) = conducted antenna power (dBm/MHz) + max. antenna gain (dBi)
3. Antenna Power value = SA measurement value (Include correction factor and cable loss)
Correction factor = 10 log (X)
X = the total number of antennas

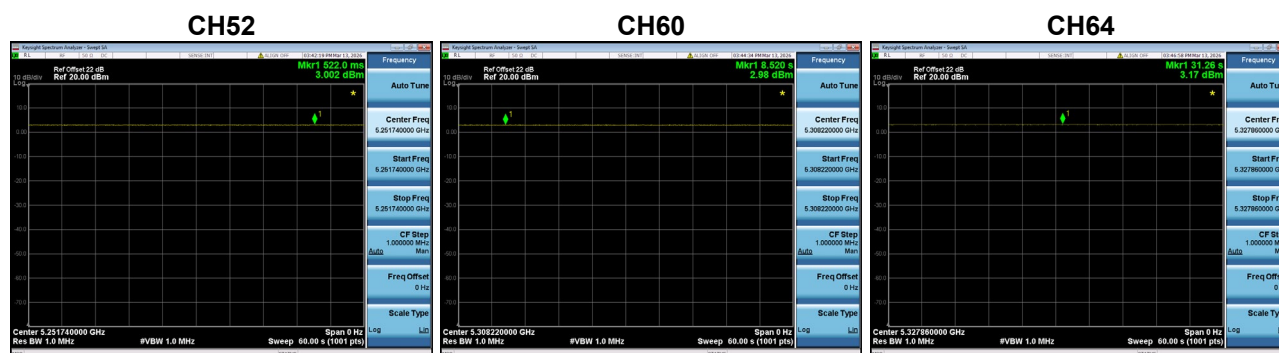


Test Mode: IEEE 802.11be(EHT40) - W53

Test Voltage	Normal Voltage		Remarks
Test Frequency (MHz)	5270	5310	Low/Mid/High of test frequency range
Antenna Power (Conducted) (mW/MHz)	1.0965	1.0000	Limit ≤ 5 mW/MHz
Antenna Power (Rated) (mW/MHz)	1.10		-
Antenna Power Tolerance (%)	-0.32	-9.09	Limit + 20% ~ - 80%
EIRP (mW/MHz)	4.8978	4.4668	Limit ≤ 5 mW/MHz (With TPC)

Note:

1. Antenna power tolerance = (conducted antenna power - rated antenna power)/rated antenna power * 100%
2. EIRP (dBm/MHz) = conducted antenna power (dBm/MHz) + max. antenna gain (dBi)
3. Antenna Power value = SA measurement value (Include correction factor and cable loss)
Correction factor = 10 log (X)
X = the total number of antennas

CH54

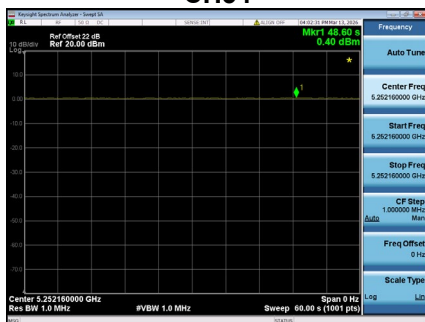

CH62




Test Mode: IEEE 802.11be(EHT80) - W53

Test Voltage	Normal Voltage	Remarks
Test Frequency (MHz)	5290	Low/Mid/High of test frequency range
Antenna Power (Conducted) (mW/MHz)	0.5483	Limit ≤ 2.5 mW/MHz
Antenna Power (Rated) (mW/MHz)	0.55	-
Antenna Power Tolerance (%)	-0.31	Limit + 20% ~ - 80%
EIRP (mW/MHz)	2.4491	Limit ≤ 2.5 mW/MHz (With TPC)

Note:

1. Antenna power tolerance = (conducted antenna power - rated antenna power)/rated antenna power * 100%
2. EIRP (dBm/MHz) = conducted antenna power (dBm/MHz) + max. antenna gain (dBi)
3. Antenna Power value = SA measurement value (Include correction factor and cable loss)
Correction factor = 10 log (X)
X = the total number of antennas

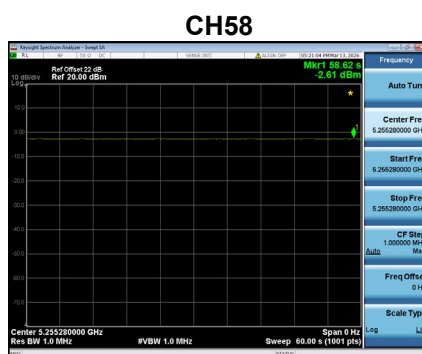


Test Mode: IEEE 802.11ac(VHT160) - W52+W53

Test Voltage	Normal Voltage	Remarks
Test Frequency (MHz)	5250	Low/Mid/High of test frequency range
Antenna Power (Conducted) (mW/MHz)	0.2655	Limit ≤ 1.25 mW/MHz
Antenna Power (Rated) (mW/MHz)	0.27	-
Antenna Power Tolerance (%)	-1.67	Limit + 20% ~ - 80%
EIRP (mW/MHz)	1.1858	Limit ≤ 1.25 mW/MHz (With TPC)

Note:

1. Antenna power tolerance = (conducted antenna power - rated antenna power)/rated antenna power * 100%
2. EIRP (dBm/MHz) = conducted antenna power (dBm/MHz) + max. antenna gain (dBi)
3. Antenna Power value = SA measurement value (Include correction factor and cable loss)
Correction factor = $10 \log (X)$
X = the total number of antennas

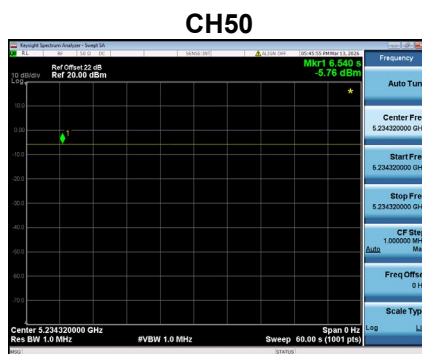


Test Mode: IEEE 802.11ax(HE160) - W52+W53

Test Voltage	Normal Voltage	Remarks
Test Frequency (MHz)	5250	Low/Mid/High of test frequency range
Antenna Power (Conducted) (mW/MHz)	0.2559	Limit ≤ 1.25 mW/MHz
Antenna Power (Rated) (mW/MHz)	0.26	-
Antenna Power Tolerance (%)	-1.58	Limit + 20% ~ - 80%
EIRP (mW/MHz)	1.1429	Limit ≤ 1.25 mW/MHz (With TPC)

Note:

1. Antenna power tolerance = (conducted antenna power - rated antenna power)/rated antenna power * 100%
2. EIRP (dBm/MHz) = conducted antenna power (dBm/MHz) + max. antenna gain (dBi)
3. Antenna Power value = SA measurement value (Include correction factor and cable loss)
Correction factor = $10 \log (X)$
X = the total number of antennas

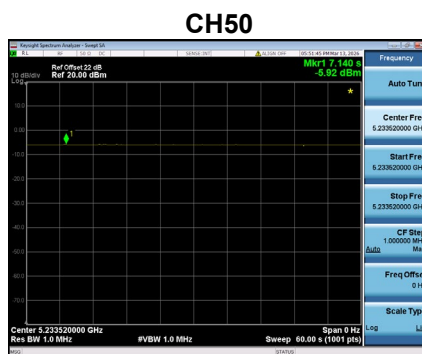


Test Mode: IEEE 802.11be(EHT160) - W52+W53

Test Voltage	Normal Voltage	Remarks
Test Frequency (MHz)	5250	Low/Mid/High of test frequency range
Antenna Power (Conducted) (mW/MHz)	0.2618	Limit ≤ 1.25 mW/MHz
Antenna Power (Rated) (mW/MHz)	0.26	-
Antenna Power Tolerance (%)	+0.69	Limit + 20% ~ - 80%
EIRP (mW/MHz)	1.1695	Limit ≤ 1.25 mW/MHz (With TPC)

Note:

1. Antenna power tolerance = (conducted antenna power - rated antenna power)/rated antenna power * 100%
2. EIRP (dBm/MHz) = conducted antenna power (dBm/MHz) + max. antenna gain (dBi)
3. Antenna Power value = SA measurement value (Include correction factor and cable loss)
Correction factor = $10 \log (X)$
X = the total number of antennas

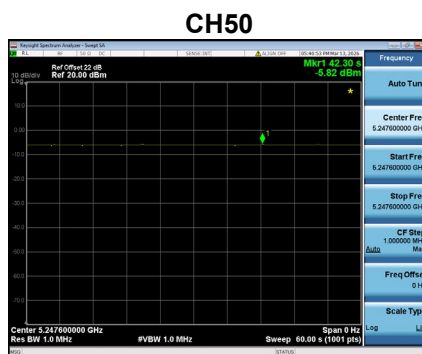

Test Mode: IEEE 802.11a - W56

Test Voltage	Normal Voltage			Remarks
Test Frequency (MHz)	5500	5600	5720	Low/Mid/High of test frequency range
Antenna Power (Conducted) (mW/MHz)	9.1833	9.3541	9.1622	Limit ≤ 10 mW/MHz
Antenna Power (Rated) (mW/MHz)	9.35			-
Antenna Power Tolerance (%)	-1.78	+0.04	-2.01	Limit + 50% ~ - 50%
EIRP (mW/MHz)	41.0204	41.7830	40.9261	Limit ≤ 50 mW/MHz (With TPC)

Note:

1. Antenna power tolerance = (conducted antenna power - rated antenna power)/rated antenna power * 100%
2. EIRP (dBm/MHz) = conducted antenna power (dBm/MHz) + max. antenna gain (dBi)
3. Antenna Power value = SA measurement value (Include correction factor and cable loss)
Correction factor = 10 log (X)
X = the total number of antennas

CH100



CH120



CH144




Test Mode: IEEE 802.11ac(VHT20) - W56

Test Voltage	Normal Voltage			Remarks
Test Frequency (MHz)	5500	5600	5720	Low/Mid/High of test frequency range
Antenna Power (Conducted) (mW/MHz)	9.5719	9.5060	8.9351	Limit ≤ 10 mW/MHz
Antenna Power (Rated) (mW/MHz)	9.57			-
Antenna Power Tolerance (%)	+0.02	-0.67	-6.63	Limit + 50% ~ - 50%
EIRP (mW/MHz)	42.7563	42.4620	39.9117	Limit ≤ 50 mW/MHz (With TPC)

Note:

1. Antenna power tolerance = (conducted antenna power - rated antenna power)/rated antenna power * 100%
2. EIRP (dBm/MHz) = conducted antenna power (dBm/MHz) + max. antenna gain (dBi)
3. Antenna Power value = SA measurement value (Include correction factor and cable loss)
Correction factor = 10 log (X)
X = the total number of antennas

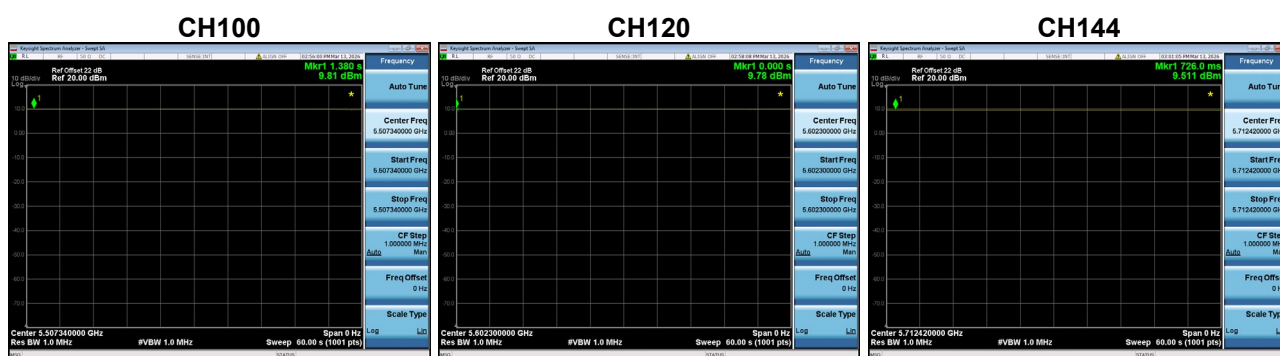

Test Mode: IEEE 802.11ac(VHT40) - W56

Test Voltage	Normal Voltage			Remarks
Test Frequency (MHz)	5510	5590	5710	Low/Mid/High of test frequency range
Antenna Power (Conducted) (mW/MHz)	4.3954	4.7643	4.8295	Limit ≤ 5 mW/MHz
Antenna Power (Rated) (mW/MHz)	4.83			-
Antenna Power Tolerance (%)	-9.00	-1.36	-0.01	Limit + 50% ~ - 50%
EIRP (mW/MHz)	19.6336	21.2814	21.5725	Limit ≤ 25 mW/MHz (With TPC)

Note:

- Antenna power tolerance = (conducted antenna power - rated antenna power)/rated antenna power * 100%
- EIRP (dBm/MHz) = conducted antenna power (dBm/MHz) + max. antenna gain (dBi)
- Antenna Power value = SA measurement value (Include correction factor and cable loss)
Correction factor = $10 \log (X)$
X = the total number of antennas

CH102



CH118



CH142




Test Mode: IEEE 802.11ac(VHT80) - W56

Test Voltage	Normal Voltage			Remarks
Test Frequency (MHz)	5530	5610	5690	Low/Mid/High of test frequency range
Antenna Power (Conducted) (mW/MHz)	2.3933	2.4044	2.4210	Limit ≤ 2.5 mW/MHz
Antenna Power (Rated) (mW/MHz)	2.42			-
Antenna Power Tolerance (%)	-1.10	-0.64	+0.04	Limit + 50% ~ - 50%
EIRP (mW/MHz)	10.6905	10.7399	10.8143	Limit ≤ 12.5 mW/MHz (With TPC)

Note:

1. Antenna power tolerance = (conducted antenna power - rated antenna power)/rated antenna power * 100%
2. EIRP (dBm/MHz) = conducted antenna power (dBm/MHz) + max. antenna gain (dBi)
3. Antenna Power value = SA measurement value (Include correction factor and cable loss)
Correction factor = $10 \log (X)$
X = the total number of antennas

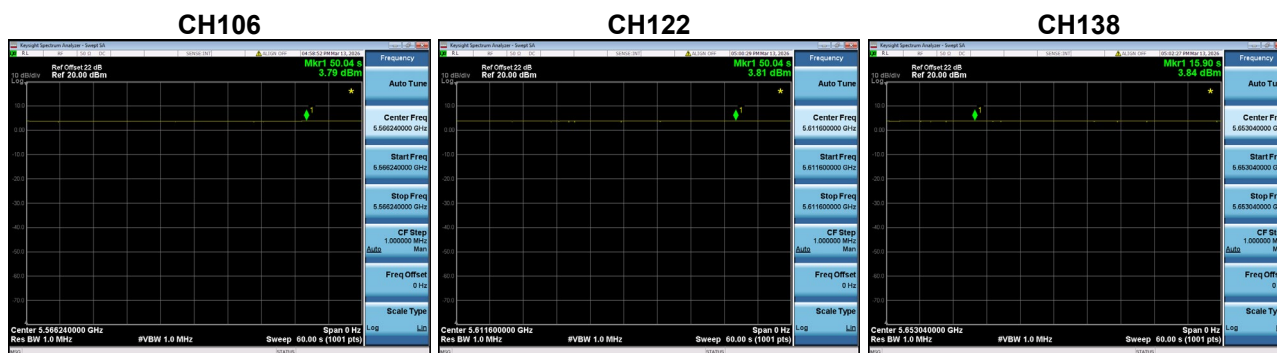


Test Mode: IEEE 802.11ac(VHT160) - W56

Test Voltage	Normal Voltage	Remarks
Test Frequency (MHz)	5570	Low/Mid/High of test frequency range
Antenna Power (Conducted) (mW/MHz)	1.1429	Limit ≤ 1.25 mW/MHz
Antenna Power (Rated) (mW/MHz)	1.14	-
Antenna Power Tolerance (%)	+0.25	Limit + 50% ~ - 50%
EIRP (mW/MHz)	5.1050	Limit ≤ 6.25 mW/MHz (With TPC)

Note:

1. Antenna power tolerance = (conducted antenna power - rated antenna power)/rated antenna power * 100%
2. EIRP (dBm/MHz) = conducted antenna power (dBm/MHz) + max. antenna gain (dBi)
3. Antenna Power value = SA measurement value (Include correction factor and cable loss)
Correction factor = 10 log (X)
X = the total number of antennas

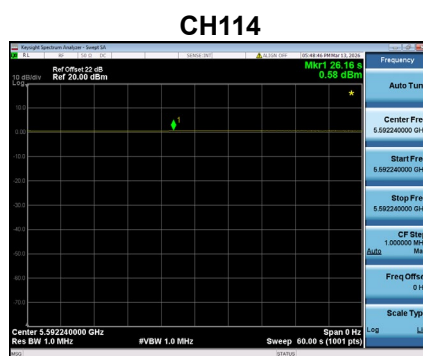


Test Mode: IEEE 802.11ax(HE20) - W56

Test Voltage	Normal Voltage			Remarks
Test Frequency (MHz)	5500	5600	5720	Low/Mid/High of test frequency range
Antenna Power (Conducted) (mW/MHz)	9.0740	9.4406	9.7499	Limit ≤ 10 mW/MHz
Antenna Power (Rated) (mW/MHz)	9.75			-
Antenna Power Tolerance (%)	-6.93	-3.17	0.00	Limit + 50% ~ - 50%
EIRP (mW/MHz)	40.5322	42.1697	43.5512	Limit ≤ 50 mW/MHz (With TPC)


Note:

1. Antenna power tolerance = (conducted antenna power - rated antenna power)/rated antenna power * 100%
2. EIRP (dBm/MHz) = conducted antenna power (dBm/MHz) + max. antenna gain (dBi)
3. Antenna Power value = SA measurement value (Include correction factor and cable loss)
Correction factor = 10 log (X)
X = the total number of antennas

CH100

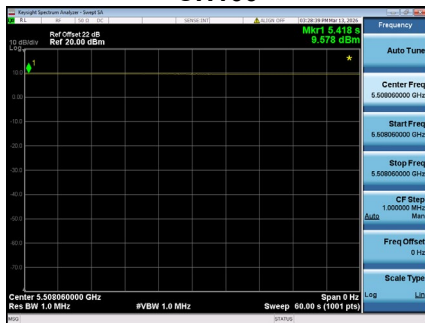

CH120

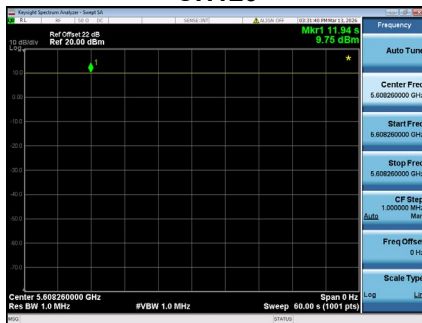

CH144




Test Mode: IEEE 802.11ax(HE40) - W56

Test Voltage	Normal Voltage			Remarks
Test Frequency (MHz)	5510	5590	5710	Low/Mid/High of test frequency range
Antenna Power (Conducted) (mW/MHz)	4.7206	4.8663	4.6666	Limit ≤ 5 mW/MHz
Antenna Power (Rated) (mW/MHz)	4.87			-
Antenna Power Tolerance (%)	-3.07	-0.08	-4.18	Limit + 50% ~ - 50%
EIRP (mW/MHz)	21.0863	21.7370	20.8449	Limit ≤ 25 mW/MHz (With TPC)

Note:

1. Antenna power tolerance = (conducted antenna power - rated antenna power)/rated antenna power * 100%
2. EIRP (dBm/MHz) = conducted antenna power (dBm/MHz) + max. antenna gain (dBi)
3. Antenna Power value = SA measurement value (Include correction factor and cable loss)
Correction factor = 10 log (X)
X = the total number of antennas

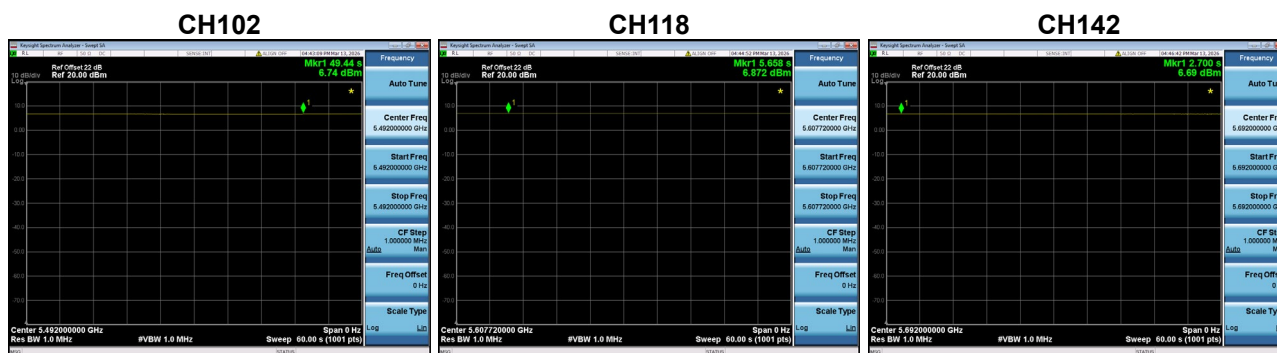

Test Mode:	IEEE 802.11ax(HE80) - W56
------------	---------------------------

Test Voltage	Normal Voltage			Remarks
Test Frequency (MHz)	5530	5610	5690	Low/Mid/High of test frequency range
Antenna Power (Conducted) (mW/MHz)	2.3659	2.3627	2.4044	Limit ≤ 2.5 mW/MHz
Antenna Power (Rated) (mW/MHz)	2.40			-
Antenna Power Tolerance (%)	-1.42	-1.55	+0.18	Limit + 50% ~ - 50%
EIRP (mW/MHz)	10.5682	10.5536	10.7399	Limit ≤ 12.5 mW/MHz (With TPC)

Note:

1. Antenna power tolerance = (conducted antenna power - rated antenna power)/rated antenna power * 100%
2. EIRP (dBm/MHz) = conducted antenna power (dBm/MHz) + max. antenna gain (dBi)
3. Antenna Power value = SA measurement value (Include correction factor and cable loss)
Correction factor = $10 \log (X)$
X = the total number of antennas

CH106



CH122



CH138



Test Mode: IEEE 802.11ax(HE160) - W56

Test Voltage	Normal Voltage	Remarks
Test Frequency (MHz)	5570	Low/Mid/High of test frequency range
Antenna Power (Conducted) (mW/MHz)	1.2331	Limit ≤ 1.25 mW/MHz
Antenna Power (Rated) (mW/MHz)	1.23	-
Antenna Power Tolerance (%)	+0.25	Limit + 50% ~ - 50%
EIRP (mW/MHz)	5.5081	Limit ≤ 6.25 mW/MHz (With TPC)

Note:

1. Antenna power tolerance = (conducted antenna power - rated antenna power)/rated antenna power * 100%
2. EIRP (dBm/MHz) = conducted antenna power (dBm/MHz) + max. antenna gain (dBi)
3. Antenna Power value = SA measurement value (Include correction factor and cable loss)
Correction factor = $10 \log (X)$
X = the total number of antennas

CH114




Test Mode: IEEE 802.11be(EHT20) - W56

Test Voltage	Normal Voltage			Remarks
Test Frequency (MHz)	5500	5600	5720	Low/Mid/High of test frequency range
Antenna Power (Conducted) (mW/MHz)	9.2470	9.5499	9.7949	Limit ≤ 10 mW/MHz
Antenna Power (Rated) (mW/MHz)	9.79			-
Antenna Power Tolerance (%)	-5.55	-2.45	+0.05	Limit + 50% ~ - 50%
EIRP (mW/MHz)	41.3048	42.6580	43.7522	Limit ≤ 50 mW/MHz (With TPC)

Note:

1. Antenna power tolerance = (conducted antenna power - rated antenna power)/rated antenna power * 100%
2. EIRP (dBm/MHz) = conducted antenna power (dBm/MHz) + max. antenna gain (dBi)
3. Antenna Power value = SA measurement value (Include correction factor and cable loss)
Correction factor = 10 log (X)
X = the total number of antennas

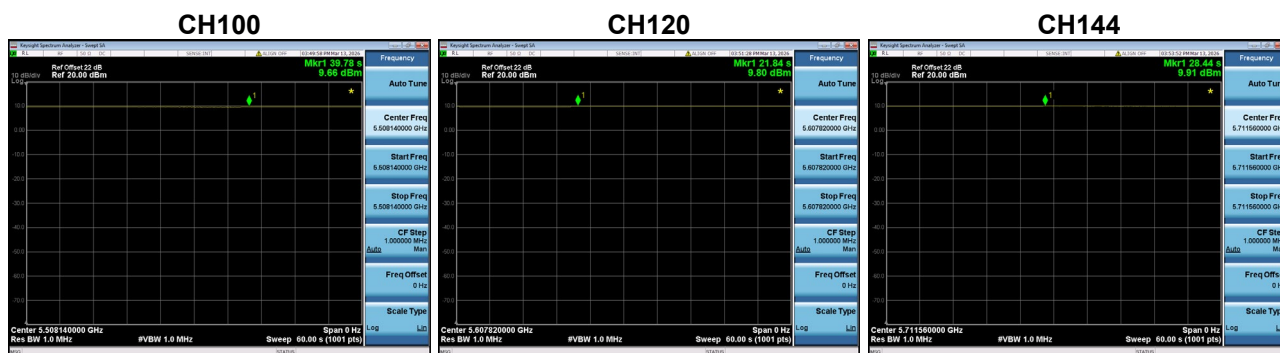

Test Mode: IEEE 802.11be(EHT40) - W56

Test Voltage	Normal Voltage			Remarks
Test Frequency (MHz)	5510	5590	5710	Low/Mid/High of test frequency range
Antenna Power (Conducted) (mW/MHz)	4.6345	4.7742	4.9204	Limit ≤ 5 mW/MHz
Antenna Power (Rated) (mW/MHz)	4.92			-
Antenna Power Tolerance (%)	-5.80	-2.96	+0.01	Limit + 50% ~ - 50%
EIRP (mW/MHz)	20.7014	21.3255	21.9786	Limit ≤ 25 mW/MHz (With TPC)

Note:

1. Antenna power tolerance = (conducted antenna power - rated antenna power)/rated antenna power * 100%
2. EIRP (dBm/MHz) = conducted antenna power (dBm/MHz) + max. antenna gain (dBi)
3. Antenna Power value = SA measurement value (Include correction factor and cable loss)
Correction factor = 10 log (X)
X = the total number of antennas

CH102



CH118



CH142




Test Mode:	IEEE 802.11be(EHT80) - W56
------------	----------------------------

Test Voltage	Normal Voltage			Remarks
Test Frequency (MHz)	5530	5610	5690	Low/Mid/High of test frequency range
Antenna Power (Conducted) (mW/MHz)	2.3768	2.3988	2.4099	Limit ≤ 2.5 mW/MHz
Antenna Power (Rated) (mW/MHz)	2.41			-
Antenna Power Tolerance (%)	-1.38	-0.46	0.00	Limit + 50% ~ - 50%
EIRP (mW/MHz)	10.6170	10.7152	10.7647	Limit ≤ 12.5 mW/MHz (With TPC)

Note:

1. Antenna power tolerance = (conducted antenna power - rated antenna power)/rated antenna power * 100%
2. EIRP (dBm/MHz) = conducted antenna power (dBm/MHz) + max. antenna gain (dBi)
3. Antenna Power value = SA measurement value (Include correction factor and cable loss)
Correction factor = $10 \log (X)$
X = the total number of antennas

CH106

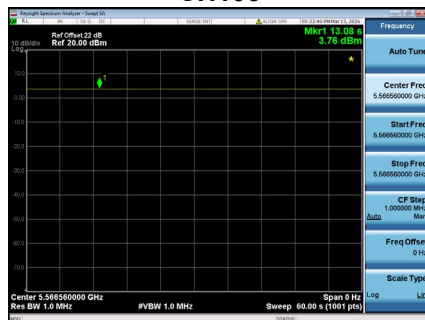

CH122



CH138



Test Mode: IEEE 802.11be(EHT160) - W56

Test Voltage	Normal Voltage	Remarks
Test Frequency (MHz)	5570	Low/Mid/High of test frequency range
Antenna Power (Conducted) (mW/MHz)	1.1064	Limit ≤ 1.25 mW/MHz
Antenna Power (Rated) (mW/MHz)	1.11	-
Antenna Power Tolerance (%)	-0.32	Limit + 50% ~ - 50%
EIRP (mW/MHz)	4.9420	Limit ≤ 6.25 mW/MHz (With TPC)

Note:

1. Antenna power tolerance = (conducted antenna power - rated antenna power)/rated antenna power * 100%
2. EIRP (dBm/MHz) = conducted antenna power (dBm/MHz) + max. antenna gain (dBi)
3. Antenna Power value = SA measurement value (Include correction factor and cable loss)
Correction factor = $10 \log (X)$
X = the total number of antennas

CH114




APPENDIX E - ADJACENT CHANNEL EMITTED POWER

Vertical Antenna

Test Mode: IEEE 802.11a - W52


Test Voltage		Normal Voltage				Remarks
Test Frequency (MHz)		5180	5200	5240	-	Low/Mid/High of test frequency range
Adjacent Channel Emitted Power	-20	30.76	31.42	30.71	dB	Limit ≥ 25 dB
	+20	30.82	31.17	30.15	dB	Limit ≥ 25 dB
	-40	47.54	47.54	45.43	dB	Limit ≥ 40 dB
	+40	46.76	46.86	45.73	dB	Limit ≥ 40 dB

CH36

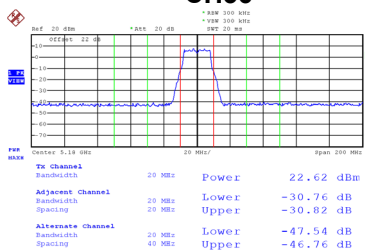


Date: 26.JAN.2026 15:33:23

CH40

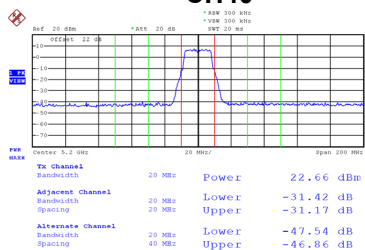

Date: 26.JAN.2026 15:38:56

CH48

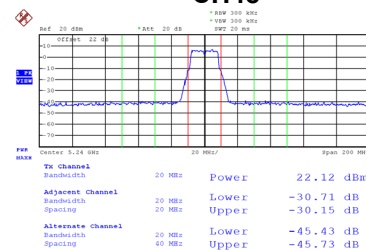


Date: 26.JAN.2026 15:42:26

Test Mode: IEEE 802.11ac(VHT20) - W52


Test Voltage		Normal Voltage				Remarks
Test Frequency (MHz)		5180	5200	5240	-	Low/Mid/High of test frequency range
Adjacent Channel Emitted Power	-20	30.66	31.07	31.32	dB	Limit ≥ 25 dB
	+20	29.26	29.89	29.90	dB	Limit ≥ 25 dB
	-40	47.70	47.58	46.08	dB	Limit ≥ 40 dB
	+40	47.00	46.74	45.91	dB	Limit ≥ 40 dB

CH36

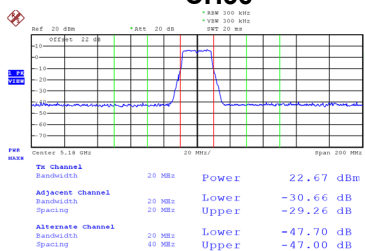


Date: 26.JAN.2026 17:33:14

CH40

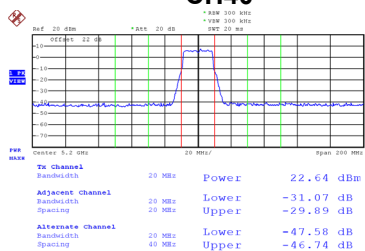

Date: 26.JAN.2026 17:38:04



CH48

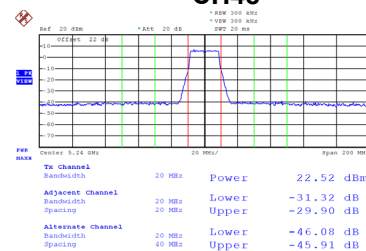

Date: 26.JAN.2026 17:43:24

Test Mode: IEEE 802.11ac(VHT40) - W52

Test Voltage		Normal Voltage			Remarks
Test Frequency (MHz)		5190	5230	-	Low/Mid/High of test frequency range
Adjacent Channel Emitted Power	-40	33.01	33.71	dB	Limit ≥ 25 dB
	+40	32.73	32.32	dB	Limit ≥ 25 dB
	-80	44.60	44.95	dB	Limit ≥ 40 dB
	+80	44.26	44.23	dB	Limit ≥ 40 dB

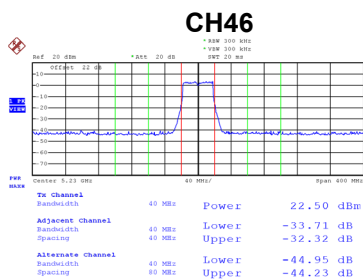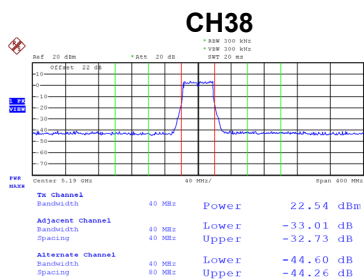


Date: 28.JAN.2026 09:57:27

Date: 28.JAN.2026 10:02:21

Test Mode: IEEE 802.11ac(VHT80) - W52


Test Voltage		Normal Voltage		Remarks
Test Frequency (MHz)		5210	-	Low/Mid/High of test frequency range
Adjacent Channel Emitted Power	-80	32.42	dB	Limit ≥ 25 dB
	+80	31.37	dB	Limit ≥ 25 dB

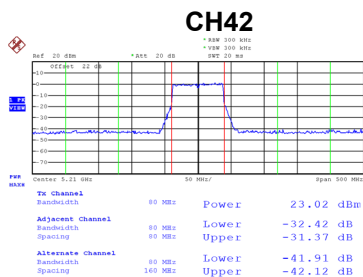


Date: 28.JAN.2026 10:50:41

Test Mode: IEEE 802.11ax(HE20) - W52


Test Voltage		Normal Voltage				Remarks
Test Frequency (MHz)		5180	5200	5240	-	Low/Mid/High of test frequency range
Adjacent Channel Emitted Power	-20	30.52	31.17	30.60	dB	Limit $\geq$ 25 dB
	+20	28.89	28.95	28.78	dB	Limit $\geq$ 25 dB
	-40	48.70	48.84	46.94	dB	Limit $\geq$ 40 dB
	+40	48.14	47.96	47.00	dB	Limit $\geq$ 40 dB

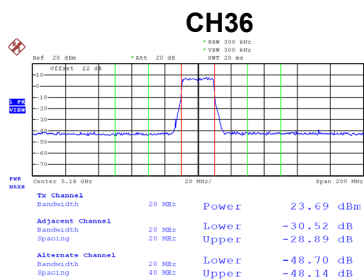

Date: 28.JAN.2026 13:33:02

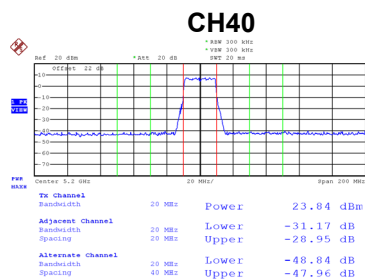


Date: 28.JAN.2026 13:38:05

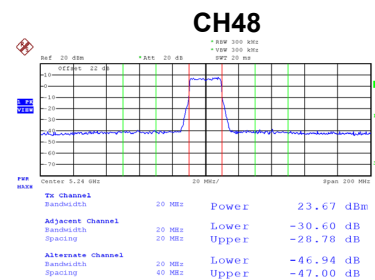


Date: 28.JAN.2026 13:43:34

Test Mode: IEEE 802.11ax(HE40) - W52

Test Voltage		Normal Voltage			Remarks
Test Frequency (MHz)		5190	5230	-	Low/Mid/High of test frequency range
Adjacent Channel Emitted Power	-40	34.74	33.99	dB	Limit $\geq$ 25 dB
	+40	32.15	31.98	dB	Limit $\geq$ 25 dB
	-80	45.37	46.01	dB	Limit $\geq$ 40 dB
	+80	44.95	45.61	dB	Limit $\geq$ 40 dB

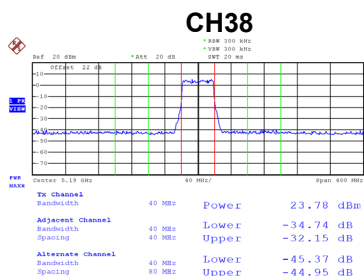


Date: 28.JAN.2026 14:40:28

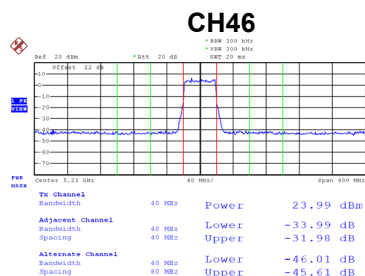

Date: 28.JAN.2026 14:42:49

Test Mode: IEEE 802.11ax(HE80) - W52


Test Voltage		Normal Voltage		Remarks
Test Frequency (MHz)		5210	-	Low/Mid/High of test frequency range
Adjacent Channel Emitted Power	-80	32.74	dB	Limit ≥ 25 dB
	+80	30.00	dB	Limit ≥ 25 dB

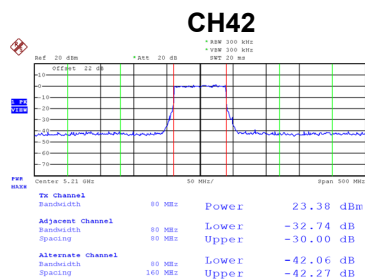


Date: 28.JAN.2026 15:39:12

Test Mode: IEEE 802.11be(EHT20) - W52


Test Voltage		Normal Voltage				Remarks
Test Frequency (MHz)		5180	5200	5240	-	Low/Mid/High of test frequency range
Adjacent Channel Emitted Power	-20	30.89	30.79	29.86	dB	Limit ≥ 25 dB
	+20	29.27	28.43	28.18	dB	Limit ≥ 25 dB
	-40	48.46	48.69	47.34	dB	Limit ≥ 40 dB
	+40	47.89	48.01	47.21	dB	Limit ≥ 40 dB

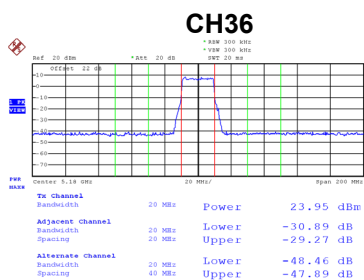

Date: 28.JAN.2026 16:35:59

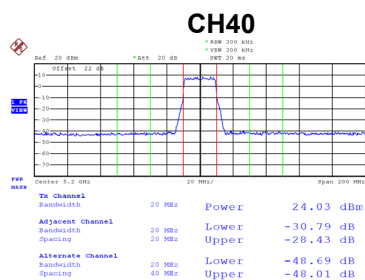

Date: 28.JAN.2026 16:41:03

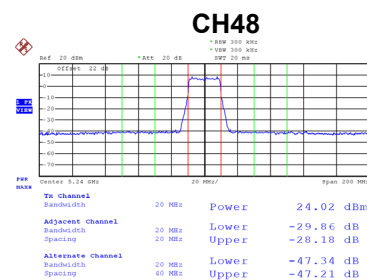


Date: 28.JAN.2026 16:46:55


Test Mode: IEEE 802.11be(EHT40) - W52

Test Voltage		Normal Voltage			Remarks
Test Frequency (MHz)		5190	5230	-	Low/Mid/High of test frequency range
Adjacent Channel Emitted Power	-40	34.60	34.86	dB	Limit ≥ 25 dB
	+40	32.18	32.49	dB	Limit ≥ 25 dB
	-80	45.47	45.56	dB	Limit ≥ 40 dB
	+80	45.13	44.72	dB	Limit ≥ 40 dB

CH38

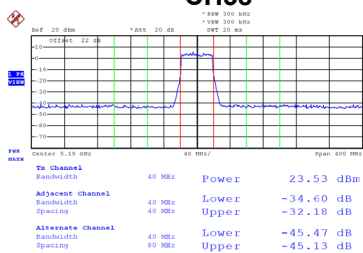

CH46

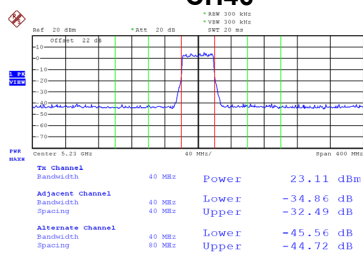


Date: 5.FEB.2026 09:53:10

Date: 5.FEB.2026 09:58:40

Test Mode: IEEE 802.11be(EHT80) - W52

Test Voltage		Normal Voltage		Remarks
Test Frequency (MHz)		5210	-	Low/Mid/High of test frequency range
Adjacent Channel Emitted Power	-80	33.37	dB	Limit ≥ 25 dB
	+80	30.05	dB	Limit ≥ 25 dB


CH42

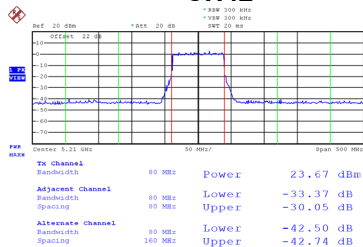


Date: 5.FEB.2026 10:40:20

Test Mode: IEEE 802.11a - W53


Test Voltage		Normal Voltage				Remarks
Test Frequency (MHz)		5260	5300	5320	-	Low/Mid/High of test frequency range
Adjacent Channel Emitted Power	-20	31.79	30.82	31.29	dB	Limit ≥ 25 dB
	+20	31.38	30.66	30.17	dB	Limit ≥ 25 dB
	-40	45.94	45.30	45.59	dB	Limit ≥ 40 dB
	+40	46.38	45.95	46.04	dB	Limit ≥ 40 dB

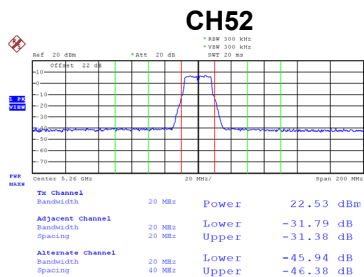

Date: 26.JAN.2026 15:48:44

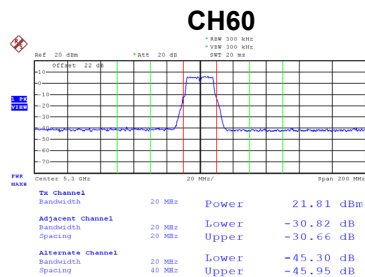


Date: 26.JAN.2026 15:52:46

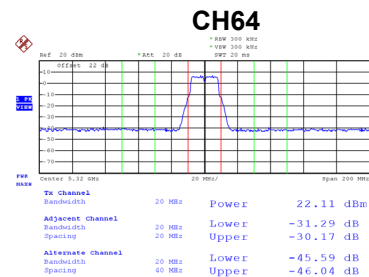


Date: 26.JAN.2026 15:55:49

Test Mode: IEEE 802.11ac(VHT20) - W53


Test Voltage		Normal Voltage				Remarks
Test Frequency (MHz)		5260	5300	5320	-	Low/Mid/High of test frequency range
Adjacent Channel Emitted Power	-20	30.50	30.96	31.31	dB	Limit ≥ 25 dB
	+20	30.35	29.09	30.16	dB	Limit ≥ 25 dB
	-40	46.09	45.74	46.07	dB	Limit ≥ 40 dB
	+40	46.50	46.34	46.60	dB	Limit ≥ 40 dB

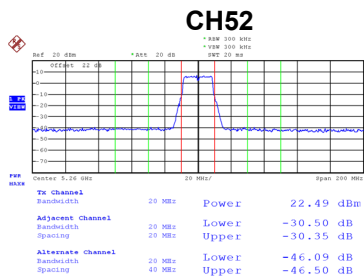

Date: 26.JAN.2026 17:49:27

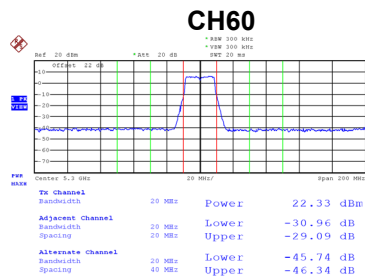

Date: 26.JAN.2026 17:56:58

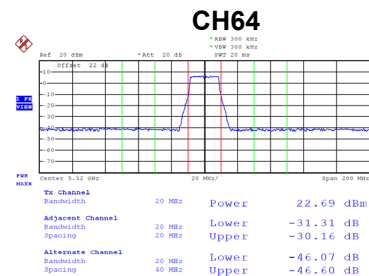


Date: 26.JAN.2026 18:38:58


Test Mode: IEEE 802.11ac(VHT40) - W53

Test Voltage		Normal Voltage			Remarks
Test Frequency (MHz)		5270	5310	-	Low/Mid/High of test frequency range
Adjacent Channel Emitted Power	-40	33.70	32.81	dB	Limit ≥ 25 dB
	+40	32.56	32.43	dB	Limit ≥ 25 dB
	-80	44.26	43.46	dB	Limit ≥ 40 dB
	+80	44.36	43.55	dB	Limit ≥ 40 dB

CH54

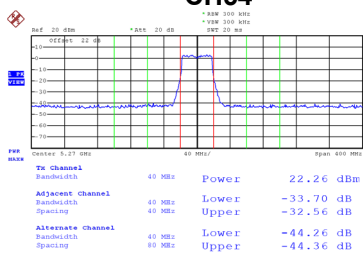

CH62

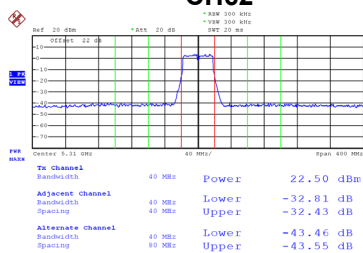


Date: 28.JAN.2026 10:06:56

Date: 28.JAN.2026 10:11:59

Test Mode: IEEE 802.11ac(VHT80) - W53

Test Voltage		Normal Voltage		Remarks
Test Frequency (MHz)		5290	-	Low/Mid/High of test frequency range
Adjacent Channel Emitted Power	-80	31.65	dB	Limit ≥ 25 dB
	+80	31.00	dB	Limit ≥ 25 dB

CH58

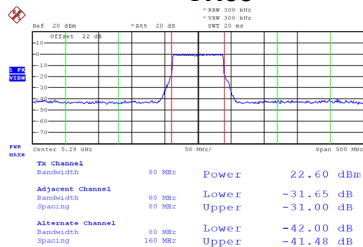


Date: 28.JAN.2026 10:55:01

Test Mode: IEEE 802.11ax(HE20) - W53


Test Voltage		Normal Voltage				Remarks
Test Frequency (MHz)		5260	5300	5320	-	Low/Mid/High of test frequency range
Adjacent Channel Emitted Power	-20	29.91	30.05	30.41	dB	Limit ≥ 25 dB
	+20	28.23	28.97	29.25	dB	Limit ≥ 25 dB
	-40	47.11	47.02	47.24	dB	Limit ≥ 40 dB
	+40	47.54	47.90	47.73	dB	Limit ≥ 40 dB

CH52

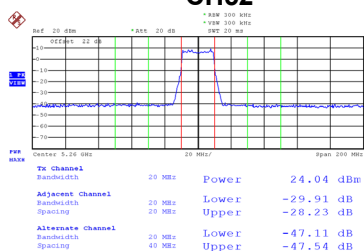


Date: 28.JAN.2026 13:50:57

CH60

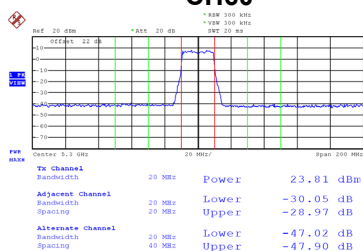

Date: 28.JAN.2026 13:57:24

CH64

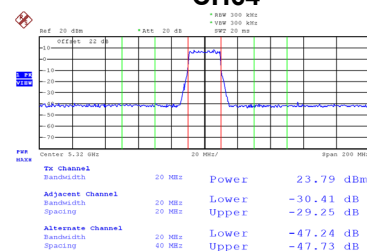


Date: 28.JAN.2026 14:01:32

Test Mode: IEEE 802.11ax(HE40) - W53


Test Voltage		Normal Voltage			Remarks
Test Frequency (MHz)		5270	5310	-	Low/Mid/High of test frequency range
Adjacent Channel Emitted Power	-40	32.29	34.00	dB	Limit ≥ 25 dB
	+40	29.75	31.59	dB	Limit ≥ 25 dB
	-80	45.10	44.30	dB	Limit ≥ 40 dB
	+80	45.15	44.29	dB	Limit ≥ 40 dB

CH54

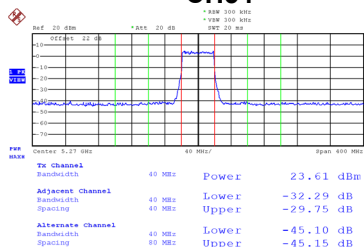

Date: 28.JAN.2026 14:50:13


CH62

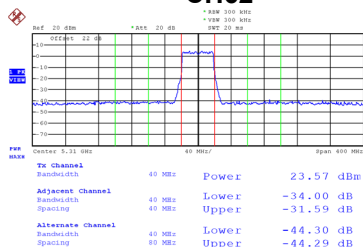

Date: 28.JAN.2026 14:53:38

Test Mode: IEEE 802.11ax(HE80) - W53


Test Voltage		Normal Voltage		Remarks
Test Frequency (MHz)		5290	-	Low/Mid/High of test frequency range
Adjacent Channel Emitted Power	-80	33.31	dB	Limit ≥ 25 dB
	+80	31.53	dB	Limit ≥ 25 dB

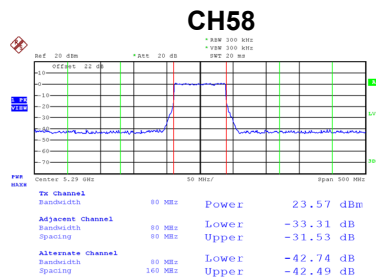


Date: 28.JAN.2026 15:44:27

Test Mode: IEEE 802.11be(EHT20) - W53


Test Voltage		Normal Voltage				Remarks
Test Frequency (MHz)		5260	5300	5320	-	Low/Mid/High of test frequency range
Adjacent Channel Emitted Power	-20	30.24	30.93	29.44	dB	Limit ≥ 25 dB
	+20	28.50	28.94	28.15	dB	Limit ≥ 25 dB
	-40	47.09	46.90	47.10	dB	Limit ≥ 40 dB
	+40	47.57	47.93	47.57	dB	Limit ≥ 40 dB

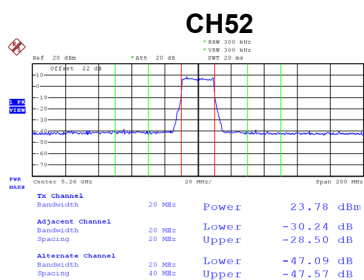

Date: 28.JAN.2026 16:57:56

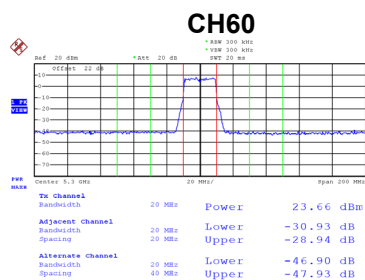

Date: 28.JAN.2026 17:10:41

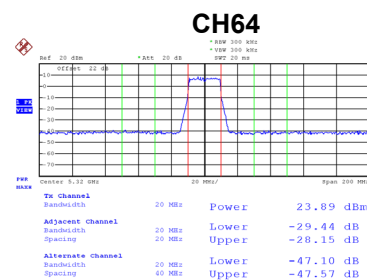


Date: 28.JAN.2026 17:14:41


Test Mode: IEEE 802.11be(EHT40) - W53

Test Voltage		Normal Voltage			Remarks
Test Frequency (MHz)		5270	5310	-	Low/Mid/High of test frequency range
Adjacent Channel Emitted Power	-40	33.23	34.02	dB	Limit ≥ 25 dB
	+40	30.26	32.67	dB	Limit ≥ 25 dB
	-80	44.96	43.88	dB	Limit ≥ 40 dB
	+80	45.01	43.97	dB	Limit ≥ 40 dB

CH54

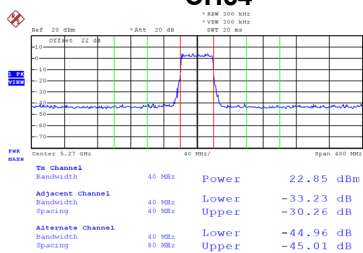

CH62

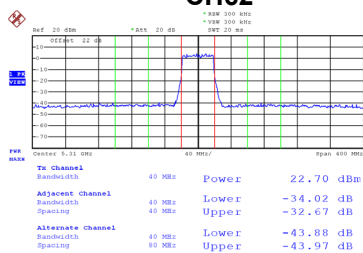


Date: 5.FEB.2026 10:02:17

Date: 5.FEB.2026 10:05:21

Test Mode: IEEE 802.11be(EHT80) - W53

Test Voltage		Normal Voltage		Remarks
Test Frequency (MHz)		5290	-	Low/Mid/High of test frequency range
Adjacent Channel Emitted Power	-80	33.16	dB	Limit ≥ 25 dB
	+80	30.82	dB	Limit ≥ 25 dB


CH58

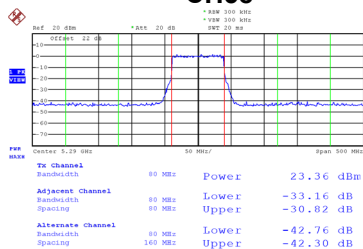


Date: 5.FEB.2026 10:45:23

Test Mode: IEEE 802.11a - W56


Test Voltage		Normal Voltage				Remarks
Test Frequency (MHz)		5500	5600	5720	-	Low/Mid/High of test frequency range
Adjacent Channel Emitted Power	-20	30.59	31.03	30.86	dB	Limit ≥ 25 dB
	+20	30.16	30.25	30.45	dB	Limit ≥ 25 dB
	-40	43.38	43.77	43.42	dB	Limit ≥ 40 dB
	+40	44.38	43.14	43.96	dB	Limit ≥ 40 dB

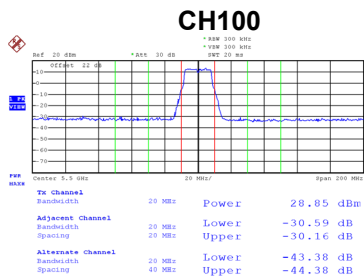

Date: 26.JAN.2026 16:11:37

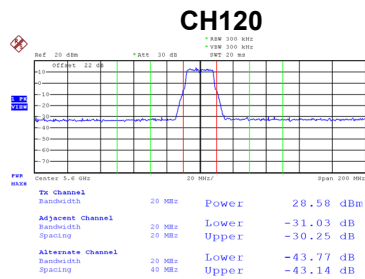


Date: 26.JAN.2026 16:14:53

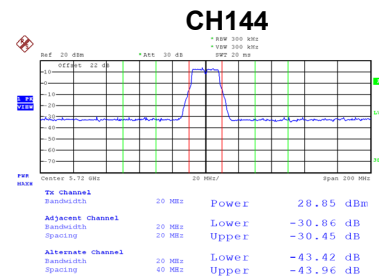


Date: 26.JAN.2026 16:18:10

Test Mode: IEEE 802.11ac(VHT20) - W56


Test Voltage		Normal Voltage				Remarks
Test Frequency (MHz)		5500	5600	5720	-	Low/Mid/High of test frequency range
Adjacent Channel Emitted Power	-20	31.46	30.25	30.86	dB	Limit ≥ 25 dB
	+20	29.55	29.84	30.39	dB	Limit ≥ 25 dB
	-40	43.70	44.02	43.46	dB	Limit ≥ 40 dB
	+40	44.63	43.54	43.97	dB	Limit ≥ 40 dB

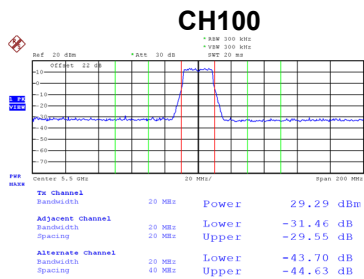

Date: 26.JAN.2026 18:43:23

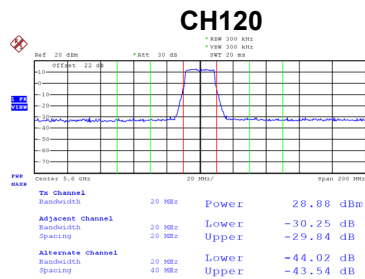

Date: 26.JAN.2026 18:47:55

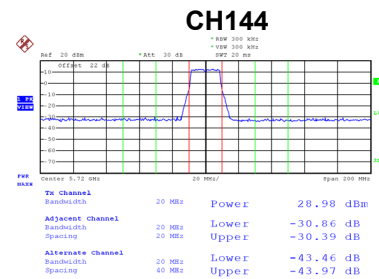


Date: 26.JAN.2026 18:52:36

Test Mode: IEEE 802.11ac(VHT40) - W56


Test Voltage		Normal Voltage				Remarks
Test Frequency (MHz)		5510	5590	5710	-	Low/Mid/High of test frequency range
Adjacent Channel Emitted Power	-40	32.89	32.63	32.19	dB	Limit ≥ 25 dB
	+40	32.74	32.53	33.02	dB	Limit ≥ 25 dB
	-80	40.14	40.87	40.49	dB	Limit ≥ 40 dB
	+80	40.81	40.24	40.80	dB	Limit ≥ 40 dB

CH102

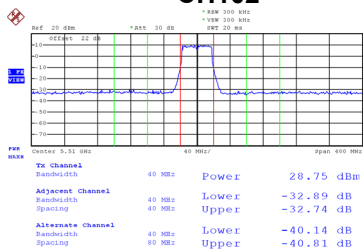


Date: 28.JAN.2026 10:15:43

CH118

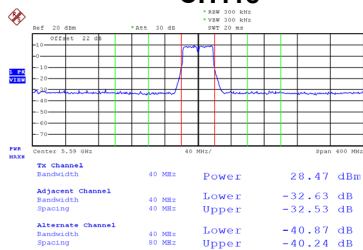

Date: 28.JAN.2026 10:17:41

CH142

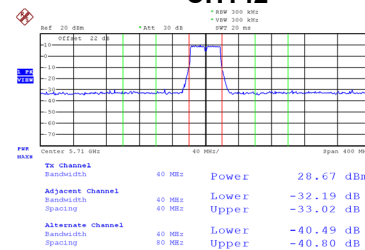


Date: 28.JAN.2026 10:19:52

Test Mode: IEEE 802.11ac(VHT80) - W56


Test Voltage		Normal Voltage				Remarks
Test Frequency (MHz)		5530	5610	5690	-	Low/Mid/High of test frequency range
Adjacent Channel	-80	32.46	32.70	31.83	dB	Limit ≥ 25 dB
Emitted Power	+80	31.90	32.27	32.65	dB	Limit ≥ 25 dB

CH106

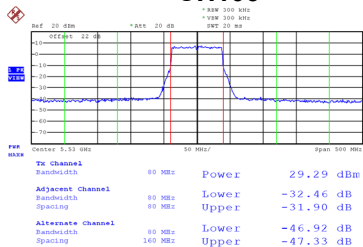


Date: 28.JAN.2026 11:00:19

CH122

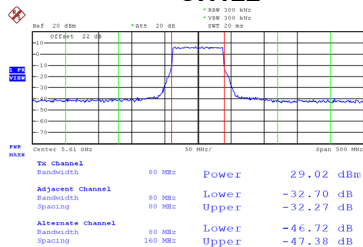

Date: 28.JAN.2026 11:05:20


CH138

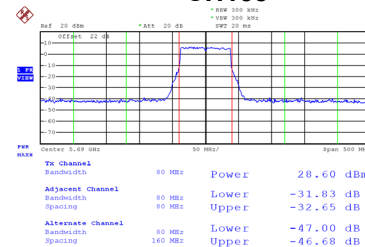


Date: 28.JAN.2026 11:08:58

Test Mode: IEEE 802.11ax(HE20) - W56


Test Voltage		Normal Voltage				Remarks
Test Frequency (MHz)		5500	5600	5720	-	Low/Mid/High of test frequency range
Adjacent Channel Emitted Power	-20	31.14	28.25	29.93	dB	Limit ≥ 25 dB
	+20	29.11	28.38	29.44	dB	Limit ≥ 25 dB
	-40	44.79	45.11	45.00	dB	Limit ≥ 40 dB
	+40	45.57	44.70	45.31	dB	Limit ≥ 40 dB

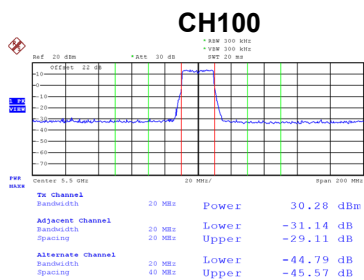

Date: 28.JAN.2026 14:06:15

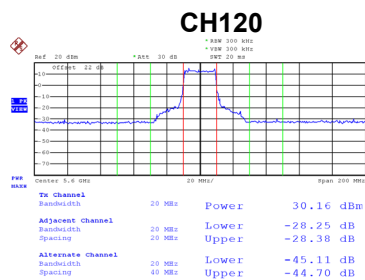


Date: 28.JAN.2026 14:12:30

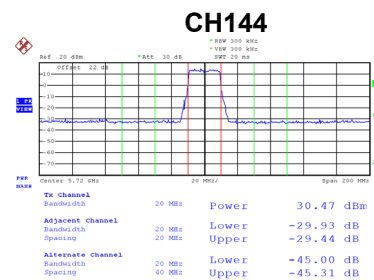


Date: 28.JAN.2026 14:15:15

Test Mode: IEEE 802.11ax(HE40) - W56


Test Voltage		Normal Voltage				Remarks
Test Frequency (MHz)		5510	5590	5710	-	Low/Mid/High of test frequency range
Adjacent Channel Emitted Power	-40	33.92	33.57	32.63	dB	Limit ≥ 25 dB
	+40	32.46	33.75	32.50	dB	Limit ≥ 25 dB
	-80	41.82	42.56	41.66	dB	Limit ≥ 40 dB
	+80	42.27	41.99	42.07	dB	Limit ≥ 40 dB

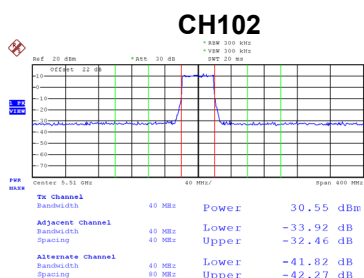

Date: 28.JAN.2026 14:16:53

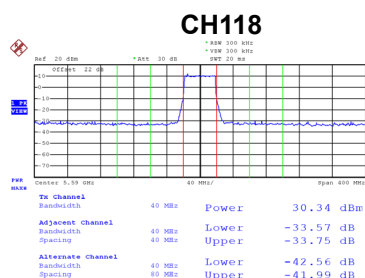


Date: 28.JAN.2026 15:13:58

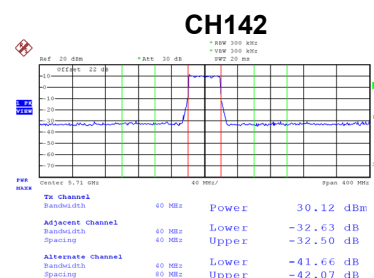


Date: 28.JAN.2026 15:16:57

Test Mode: IEEE 802.11ax(HE80) - W56


Test Voltage		Normal Voltage				Remarks
Test Frequency (MHz)		5530	5610	5690	-	Low/Mid/High of test frequency range
Adjacent Channel	-80	33.39	33.50	33.75	dB	Limit ≥ 25 dB
Emitted Power	+80	31.51	32.01	33.47	dB	Limit ≥ 25 dB

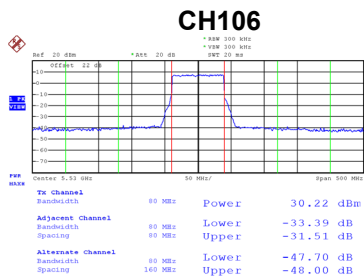

Date: 28.JAN.2026 15:49:44

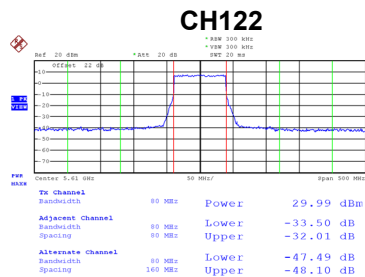


Date: 28.JAN.2026 15:51:28

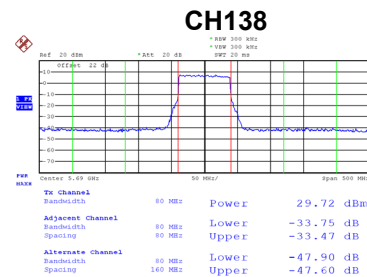


Date: 28.JAN.2026 15:59:08

Test Mode: IEEE 802.11be(EHT20) - W56


Test Voltage		Normal Voltage				Remarks
Test Frequency (MHz)		5500	5600	5720	-	Low/Mid/High of test frequency range
Adjacent Channel Emitted Power	-20	29.89	29.66	30.41	dB	Limit ≥ 25 dB
	+20	28.30	29.79	28.75	dB	Limit ≥ 25 dB
	-40	44.95	45.39	44.59	dB	Limit ≥ 40 dB
	+40	45.78	45.08	45.11	dB	Limit ≥ 40 dB

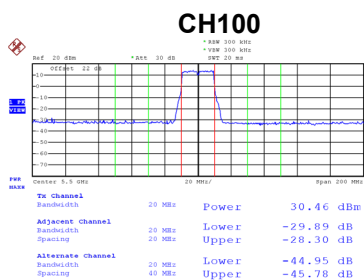

Date: 28.JAN.2026 17:21:37

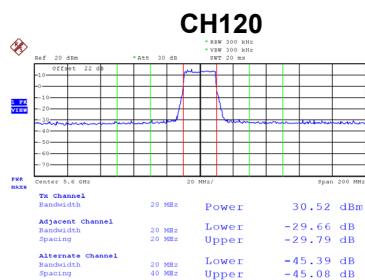

Date: 28.JAN.2026 17:23:50

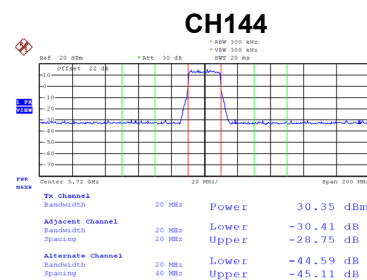


Date: 28.JAN.2026 17:27:28

Test Mode: IEEE 802.11be(EHT40) - W56


Test Voltage		Normal Voltage				Remarks
Test Frequency (MHz)		5510	5590	5710	-	Low/Mid/High of test frequency range
Adjacent Channel Emitted Power	-40	33.79	32.77	33.50	dB	Limit ≥ 25 dB
	+40	31.59	32.93	32.08	dB	Limit ≥ 25 dB
	-80	41.20	42.38	41.20	dB	Limit ≥ 40 dB
	+80	41.75	41.66	41.81	dB	Limit ≥ 40 dB

CH102

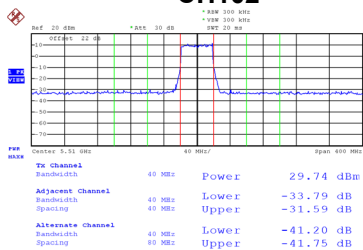


Date: 5.FEB.2026 10:08:09

CH118

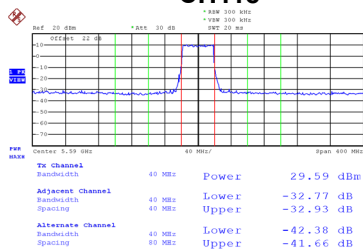

Date: 5.FEB.2026 10:09:28

CH142

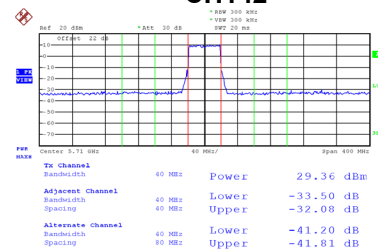


Date: 5.FEB.2026 10:11:10

Test Mode: IEEE 802.11be(EHT80) - W56


Test Voltage		Normal Voltage				Remarks
Test Frequency (MHz)		5530	5610	5690	-	Low/Mid/High of test frequency range
Adjacent Channel	-80	33.55	33.06	32.63	dB	Limit ≥ 25 dB
Emitted Power	+80	31.71	30.99	33.29	dB	Limit ≥ 25 dB

CH106

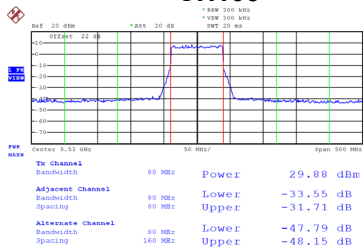


Date: 5.FEB.2026 10:52:32

CH122

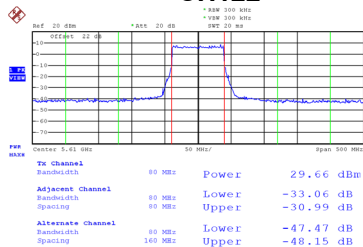

Date: 5.FEB.2026 10:54:41

CH138

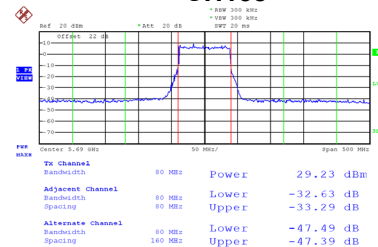


Date: 5.FEB.2026 10:59:19

Horizontal Antenna


Test Mode: IEEE 802.11a - W52

Test Voltage		Normal Voltage				Remarks
Test Frequency (MHz)		5180	5200	5240	-	Low/Mid/High of test frequency range
Adjacent Channel Emitted Power	-20	30.74	30.88	30.43	dB	Limit ≥ 25 dB
	+20	30.53	30.88	31.05	dB	Limit ≥ 25 dB
	-40	47.27	47.32	45.51	dB	Limit ≥ 40 dB
	+40	46.59	46.43	45.69	dB	Limit ≥ 40 dB


CH36

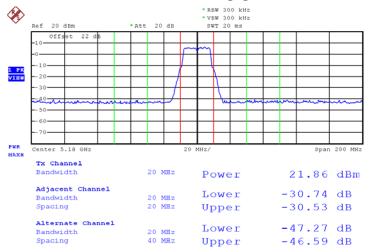

CH40

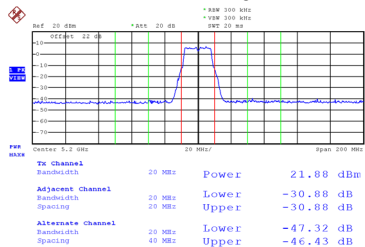

CH48

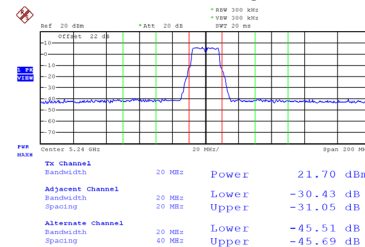

Date: 14.MAR.2026 15:45:34


Date: 14.MAR.2026 15:50:06

Date: 14.MAR.2026 15:50:05


Test Mode: IEEE 802.11ac(VHT20) - W52

Test Voltage		Normal Voltage				Remarks
Test Frequency (MHz)		5180	5200	5240	-	Low/Mid/High of test frequency range
Adjacent Channel Emitted Power	-20	30.69	31.22	30.48	dB	Limit ≥ 25 dB
	+20	30.66	30.18	30.10	dB	Limit ≥ 25 dB
	-40	47.58	47.08	45.64	dB	Limit ≥ 40 dB
	+40	46.74	46.69	45.75	dB	Limit ≥ 40 dB


CH36

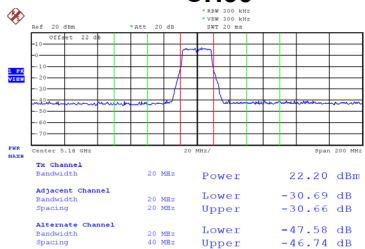

CH40

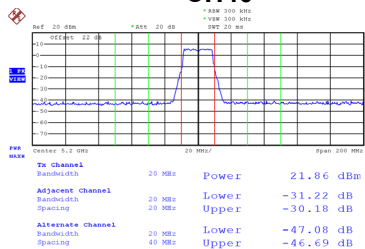

CH48

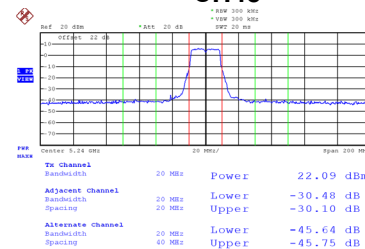

Date: 14.MAR.2026 17:23:42


Date: 14.MAR.2026 17:28:08

Date: 17.MAR.2026 10:07:53


Test Mode: IEEE 802.11ac(VHT40) - W52

Test Voltage		Normal Voltage			Remarks
Test Frequency (MHz)		5190	5230	-	Low/Mid/High of test frequency range
Adjacent Channel Emitted Power	-40	33.87	32.97	dB	Limit ≥ 25 dB
	+40	30.98	32.64	dB	Limit ≥ 25 dB
	-80	44.43	44.38	dB	Limit ≥ 40 dB
	+80	44.04	43.97	dB	Limit ≥ 40 dB

CH38

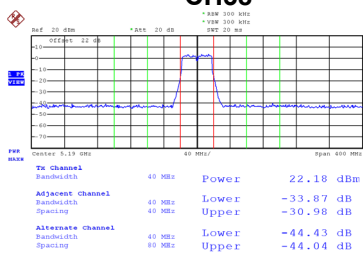

CH46

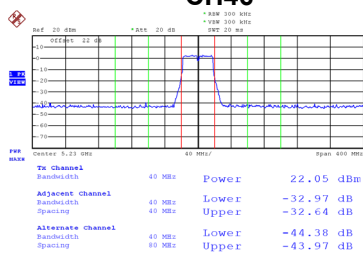


Date: 17.MAR.2026 14:41:03

Date: 17.MAR.2026 14:43:23

Test Mode: IEEE 802.11ac(VHT80) - W52

Test Voltage		Normal Voltage		Remarks
Test Frequency (MHz)		5210	-	Low/Mid/High of test frequency range
Adjacent Channel Emitted Power	-80	32.16	dB	Limit ≥ 25 dB
	+80	31.07	dB	Limit ≥ 25 dB

CH42

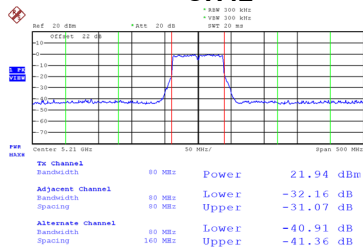


Date: 17.MAR.2026 16:38:35

Test Mode: IEEE 802.11ax(HE20) - W52


Test Voltage		Normal Voltage				Remarks
Test Frequency (MHz)		5180	5200	5240	-	Low/Mid/High of test frequency range
Adjacent Channel Emitted Power	-20	29.57	28.67	31.39	dB	Limit $\geq$ 25 dB
	+20	29.04	29.14	29.49	dB	Limit $\geq$ 25 dB
	-40	48.38	48.19	46.64	dB	Limit $\geq$ 40 dB
	+40	47.66	47.53	46.76	dB	Limit $\geq$ 40 dB

CH36




Date: 17.MAR.2026 11:09:55

CH40



Date: 17.MAR.2026 11:09:50

CH48

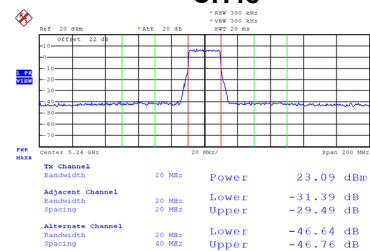


Date: 17.MAR.2026 11:09:12

Test Mode: IEEE 802.11ax(HE40) - W52


Test Voltage		Normal Voltage			Remarks
Test Frequency (MHz)		5190	5230	-	Low/Mid/High of test frequency range
Adjacent Channel Emitted Power	-40	34.04	34.25	dB	Limit $\geq$ 25 dB
	+40	33.69	31.93	dB	Limit $\geq$ 25 dB
	-80	45.30	45.99	dB	Limit $\geq$ 40 dB
	+80	45.06	45.66	dB	Limit $\geq$ 40 dB

CH38

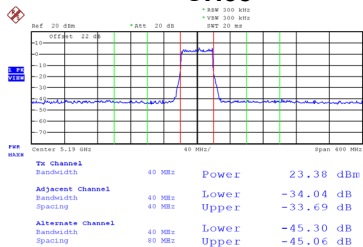

Date: 17.MAR.2026 15:15:08


CH46

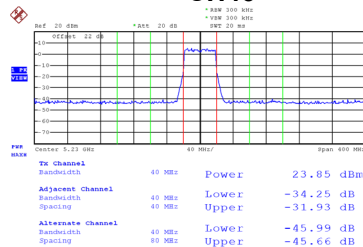

Date: 17.MAR.2026 15:17:39

Test Mode: IEEE 802.11ax(HE80) - W52


Test Voltage		Normal Voltage		Remarks
Test Frequency (MHz)		5210	-	Low/Mid/High of test frequency range
Adjacent Channel Emitted Power	-80	34.26	dB	Limit ≥ 25 dB
	+80	30.77	dB	Limit ≥ 25 dB

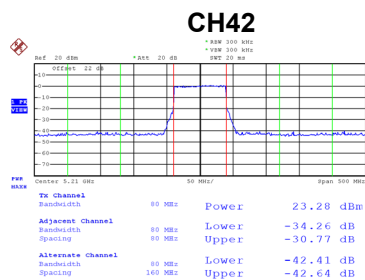


Date: 17.MAR.2026 17:03:38

Test Mode: IEEE 802.11be(EHT20) - W52


Test Voltage		Normal Voltage				Remarks
Test Frequency (MHz)		5180	5200	5240	-	Low/Mid/High of test frequency range
Adjacent Channel Emitted Power	-20	30.42	30.85	30.22	dB	Limit ≥ 25 dB
	+20	28.05	29.02	27.72	dB	Limit ≥ 25 dB
	-40	48.39	48.51	47.35	dB	Limit ≥ 40 dB
	+40	47.58	47.69	47.22	dB	Limit ≥ 40 dB

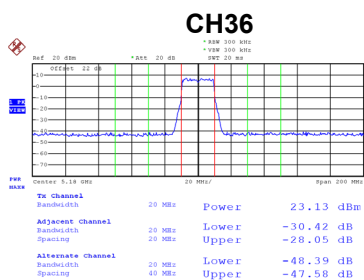

Date: 17.MAR.2026 13:15:20

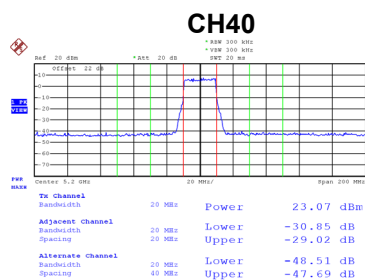

Date: 17.MAR.2026 13:17:33




Date: 17.MAR.2026 13:19:31


Test Mode: IEEE 802.11be(EHT40) - W52

Test Voltage		Normal Voltage			Remarks
Test Frequency (MHz)		5190	5230	-	Low/Mid/High of test frequency range
Adjacent Channel Emitted Power	-40	34.20	33.46	dB	Limit ≥ 25 dB
	+40	33.48	32.59	dB	Limit ≥ 25 dB
	-80	45.42	45.92	dB	Limit ≥ 40 dB
	+80	44.93	45.50	dB	Limit ≥ 40 dB

CH38

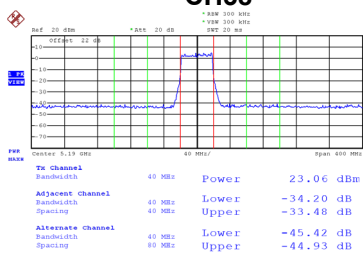

CH46

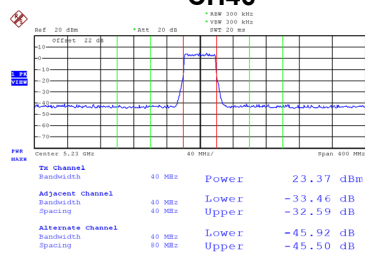


Date: 17.MAR.2026 14:01:42

Date: 17.MAR.2026 14:08:02

Test Mode: IEEE 802.11be(EHT80) - W52

Test Voltage		Normal Voltage		Remarks
Test Frequency (MHz)		5210	-	Low/Mid/High of test frequency range
Adjacent Channel Emitted Power	-80	32.76	dB	Limit ≥ 25 dB
	+80	31.42	dB	Limit ≥ 25 dB


CH42

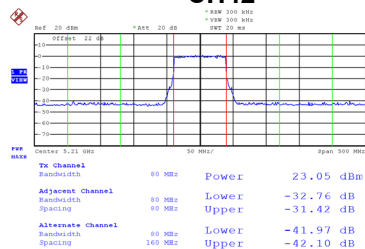


Date: 17.MAR.2026 15:43:49

Test Mode: IEEE 802.11a - W53


Test Voltage		Normal Voltage				Remarks
Test Frequency (MHz)		5260	5300	5320	-	Low/Mid/High of test frequency range
Adjacent Channel Emitted Power	-20	29.77	31.02	30.55	dB	Limit ≥ 25 dB
	+20	31.65	30.77	30.30	dB	Limit ≥ 25 dB
	-40	45.44	45.22	45.75	dB	Limit ≥ 40 dB
	+40	46.10	45.95	46.06	dB	Limit ≥ 40 dB



Date: 14.MAR.2026 16:05:42




Date: 14.MAR.2026 16:12:35

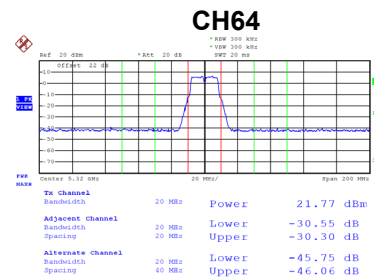


Date: 14.MAR.2026 16:17:47

Test Mode: IEEE 802.11ac(VHT20) - W53


Test Voltage		Normal Voltage				Remarks
Test Frequency (MHz)		5260	5300	5320	-	Low/Mid/High of test frequency range
Adjacent Channel Emitted Power	-20	30.63	30.12	30.86	dB	Limit ≥ 25 dB
	+20	30.70	29.79	30.32	dB	Limit ≥ 25 dB
	-40	45.59	45.26	45.66	dB	Limit ≥ 40 dB
	+40	46.37	46.28	46.24	dB	Limit ≥ 40 dB



Date: 17.MAR.2026 10:14:36





Date: 17.MAR.2026 10:20:08

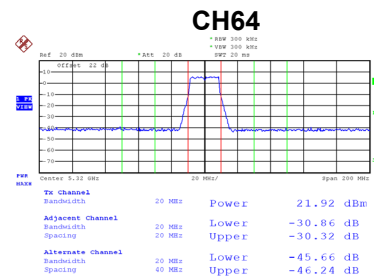

Date: 17.MAR.2026 10:24:43

Test Mode: IEEE 802.11ac(VHT40) - W53

Test Voltage		Normal Voltage			Remarks
Test Frequency (MHz)		5270	5310	-	Low/Mid/High of test frequency range
Adjacent Channel Emitted Power	-40	33.12	33.88	dB	Limit ≥ 25 dB
	+40	32.14	32.79	dB	Limit ≥ 25 dB
	-80	43.86	43.01	dB	Limit ≥ 40 dB
	+80	44.04	42.99	dB	Limit ≥ 40 dB

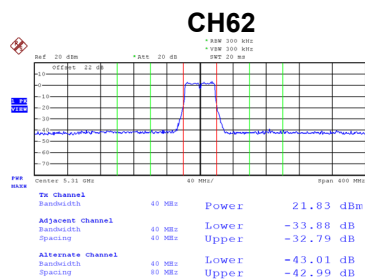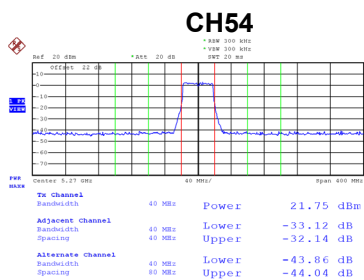


Date: 17.MAR.2026 14:45:49

Date: 17.MAR.2026 14:49:58

Test Mode: IEEE 802.11ac(VHT80) - W53

Test Voltage		Normal Voltage		Remarks
Test Frequency (MHz)		5290	-	Low/Mid/High of test frequency range
Adjacent Channel Emitted Power	-80	31.36	dB	Limit ≥ 25 dB
	+80	31.10	dB	Limit ≥ 25 dB




Date: 17.MAR.2026 16:41:22

Test Mode: IEEE 802.11ax(HE20) - W53


Test Voltage		Normal Voltage				Remarks
Test Frequency (MHz)		5260	5300	5320	-	Low/Mid/High of test frequency range
Adjacent Channel Emitted Power	-20	29.88	30.66	29.05	dB	Limit $\geq$ 25 dB
	+20	30.08	29.74	29.27	dB	Limit $\geq$ 25 dB
	-40	46.40	46.89	46.62	dB	Limit $\geq$ 40 dB
	+40	47.33	47.90	47.04	dB	Limit $\geq$ 40 dB

CH52

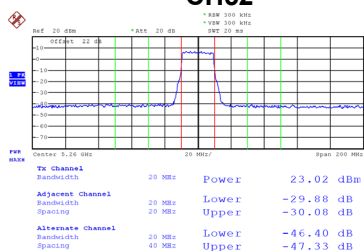


Date: 17.MAR.2026 11:13:53

CH60



Date: 17.MAR.2026 11:22:11

CH64

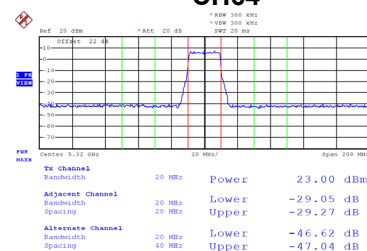


Date: 17.MAR.2026 11:27:54

Test Mode: IEEE 802.11ax(HE40) - W53


Test Voltage		Normal Voltage			Remarks
Test Frequency (MHz)		5270	5310	-	Low/Mid/High of test frequency range
Adjacent Channel Emitted Power	-40	33.03	33.42	dB	Limit $\geq$ 25 dB
	+40	29.95	32.86	dB	Limit $\geq$ 25 dB
	-80	44.72	43.80	dB	Limit $\geq$ 40 dB
	+80	45.16	44.03	dB	Limit $\geq$ 40 dB

CH54

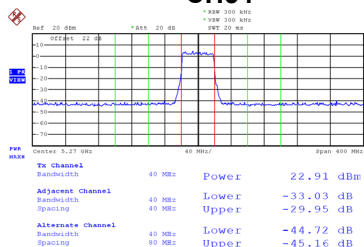

Date: 17.MAR.2026 15:19:46


CH62

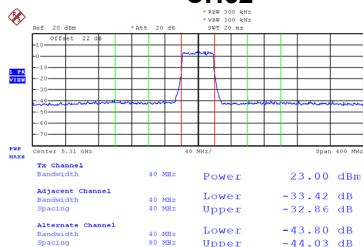

Date: 17.MAR.2026 15:21:34

Test Mode: IEEE 802.11ax(HE80) - W53


Test Voltage		Normal Voltage		Remarks
Test Frequency (MHz)		5290	-	Low/Mid/High of test frequency range
Adjacent Channel Emitted Power	-80	33.18	dB	Limit ≥ 25 dB
	+80	32.34	dB	Limit ≥ 25 dB

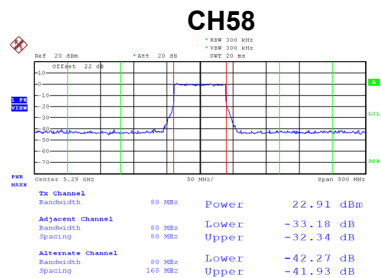


Date: 17.MAR.2026 17:05:47

Test Mode: IEEE 802.11be(EHT20) - W53


Test Voltage		Normal Voltage				Remarks
Test Frequency (MHz)		5260	5300	5320	-	Low/Mid/High of test frequency range
Adjacent Channel Emitted Power	-20	29.56	30.69	30.52	dB	Limit ≥ 25 dB
	+20	29.56	29.88	27.56	dB	Limit ≥ 25 dB
	-40	46.52	46.67	46.63	dB	Limit ≥ 40 dB
	+40	47.30	47.36	47.37	dB	Limit ≥ 40 dB

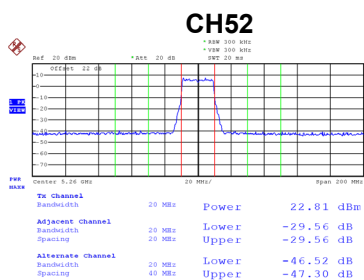

Date: 17.MAR.2026 13:24:19

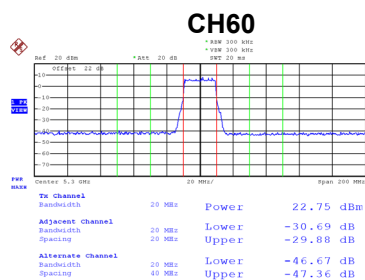



Date: 17.MAR.2026 13:29:56

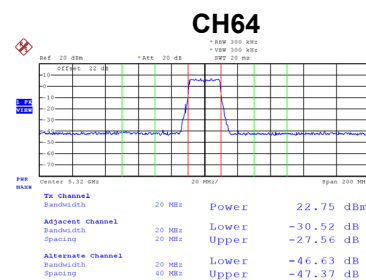

Date: 17.MAR.2026 13:32:22

Test Mode: IEEE 802.11be(EHT40) - W53

Test Voltage		Normal Voltage			Remarks
Test Frequency (MHz)		5270	5310	-	Low/Mid/High of test frequency range
Adjacent Channel Emitted Power	-40	32.98	33.54	dB	Limit ≥ 25 dB
	+40	30.81	31.96	dB	Limit ≥ 25 dB
	-80	45.28	43.72	dB	Limit ≥ 40 dB
	+80	45.43	43.99	dB	Limit ≥ 40 dB

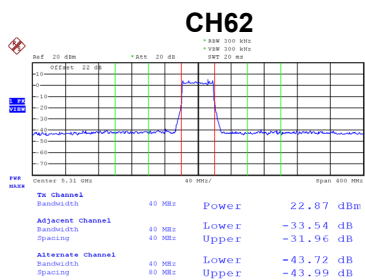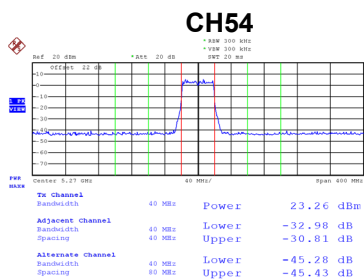


Date: 17.MAR.2026 14:10:32

Date: 17.MAR.2026 14:12:46

Test Mode: IEEE 802.11be(EHT80) - W53


Test Voltage		Normal Voltage		Remarks
Test Frequency (MHz)		5290	-	Low/Mid/High of test frequency range
Adjacent Channel Emitted Power	-80	32.35	dB	Limit ≥ 25 dB
	+80	32.57	dB	Limit ≥ 25 dB

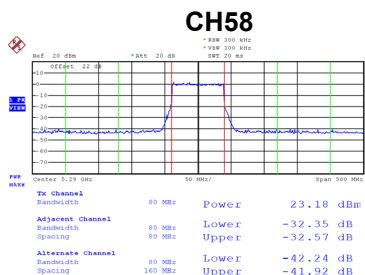


Date: 17.MAR.2026 15:45:29

Test Mode: IEEE 802.11a - W56


Test Voltage		Normal Voltage				Remarks
Test Frequency (MHz)		5500	5600	5720	-	Low/Mid/High of test frequency range
Adjacent Channel Emitted Power	-20	30.46	30.31	30.02	dB	Limit ≥ 25 dB
	+20	30.01	30.69	31.29	dB	Limit ≥ 25 dB
	-40	43.07	43.98	43.08	dB	Limit ≥ 40 dB
	+40	43.83	43.38	43.72	dB	Limit ≥ 40 dB



Date: 14.MAR.2026 16:23:23




Date: 14.MAR.2026 16:26:43




Date: 14.MAR.2026 16:46:37

Test Mode: IEEE 802.11ac(VHT20) - W56


Test Voltage		Normal Voltage				Remarks
Test Frequency (MHz)		5500	5600	5720	-	Low/Mid/High of test frequency range
Adjacent Channel Emitted Power	-20	30.60	29.92	30.57	dB	Limit ≥ 25 dB
	+20	29.99	30.46	30.77	dB	Limit ≥ 25 dB
	-40	43.10	43.94	42.76	dB	Limit ≥ 40 dB
	+40	43.98	43.21	43.56	dB	Limit ≥ 40 dB



Date: 17.MAR.2026 10:28:35




Date: 17.MAR.2026 10:30:11

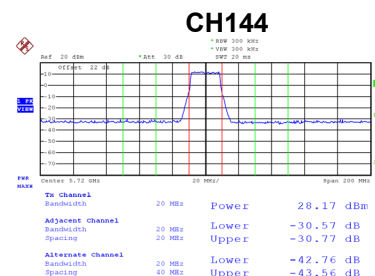


Date: 17.MAR.2026 10:32:16

Test Mode: IEEE 802.11ac(VHT40) - W56


Test Voltage		Normal Voltage				Remarks
Test Frequency (MHz)		5510	5590	5710	-	Low/Mid/High of test frequency range
Adjacent Channel Emitted Power	-40	32.97	33.46	32.74	dB	Limit ≥ 25 dB
	+40	32.98	32.97	33.04	dB	Limit ≥ 25 dB
	-80	48.23	49.65	48.48	dB	Limit ≥ 40 dB
	+80	48.84	49.30	49.21	dB	Limit ≥ 40 dB



Date: 17.MAR.2026 14:52:34




Date: 17.MAR.2026 14:54:30




Date: 17.MAR.2026 14:55:39

Test Mode: IEEE 802.11ac(VHT80) - W56


Test Voltage		Normal Voltage				Remarks
Test Frequency (MHz)		5530	5610	5690	-	Low/Mid/High of test frequency range
Adjacent Channel	-80	32.46	32.74	31.06	dB	Limit ≥ 25 dB
Emitted Power	+80	30.94	32.17	31.91	dB	Limit ≥ 25 dB



Date: 17.MAR.2026 16:43:01




Date: 17.MAR.2026 16:44:12




Date: 17.MAR.2026 20:24:57

Test Mode: IEEE 802.11ax(HE20) - W56


Test Voltage		Normal Voltage				Remarks
Test Frequency (MHz)		5500	5600	5720	-	Low/Mid/High of test frequency range
Adjacent Channel Emitted Power	-20	31.09	30.15	29.03	dB	Limit ≥ 25 dB
	+20	27.82	29.46	29.37	dB	Limit ≥ 25 dB
	-40	44.27	45.26	44.44	dB	Limit ≥ 40 dB
	+40	45.25	44.71	45.23	dB	Limit ≥ 40 dB



Date: 17.MAR.2026 11:32:27




Date: 17.MAR.2026 11:38:32

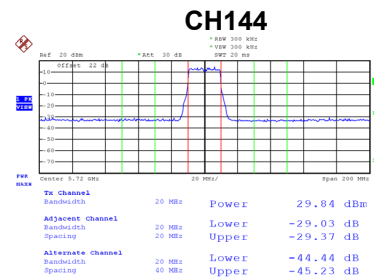


Date: 17.MAR.2026 11:43:41

Test Mode: IEEE 802.11ax(HE40) - W56


Test Voltage		Normal Voltage				Remarks
Test Frequency (MHz)		5510	5590	5710	-	Low/Mid/High of test frequency range
Adjacent Channel Emitted Power	-40	33.47	33.60	32.70	dB	Limit ≥ 25 dB
	+40	31.79	32.75	32.97	dB	Limit ≥ 25 dB
	-80	41.09	42.43	40.71	dB	Limit ≥ 40 dB
	+80	41.61	41.67	41.36	dB	Limit ≥ 40 dB



Date: 17.MAR.2026 15:24:42

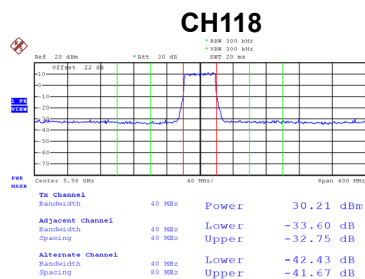


Date: 17.MAR.2026 15:25:49

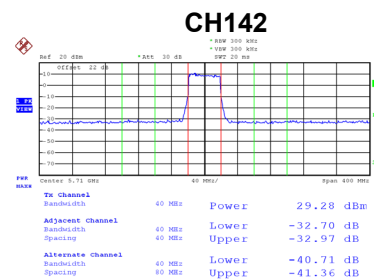


Date: 17.MAR.2026 15:26:51

Test Mode: IEEE 802.11ax(HE80) - W56


Test Voltage		Normal Voltage				Remarks
Test Frequency (MHz)		5530	5610	5690	-	Low/Mid/High of test frequency range
Adjacent Channel	-80	32.96	34.07	32.23	dB	Limit ≥ 25 dB
Emitted Power	+80	30.47	32.59	33.14	dB	Limit ≥ 25 dB

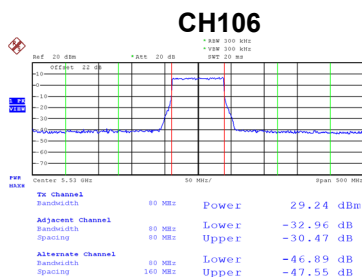

Date: 17.MAR.2026 17:08:03




Date: 17.MAR.2026 17:09:30




Date: 17.MAR.2026 17:11:36

Test Mode: IEEE 802.11be(EHT20) - W56


Test Voltage		Normal Voltage				Remarks
Test Frequency (MHz)		5500	5600	5720	-	Low/Mid/High of test frequency range
Adjacent Channel Emitted Power	-20	30.78	29.00	29.60	dB	Limit ≥ 25 dB
	+20	28.81	30.02	29.37	dB	Limit ≥ 25 dB
	-40	43.91	44.99	44.44	dB	Limit ≥ 40 dB
	+40	44.87	44.23	44.84	dB	Limit ≥ 40 dB

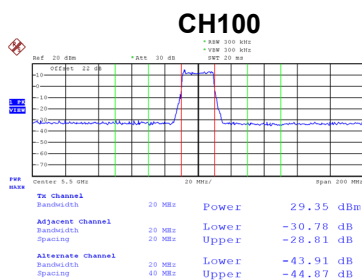

Date: 17.MAR.2026 13:35:00



Date: 17.MAR.2026 13:37:53




Date: 17.MAR.2026 13:40:07

Test Mode: IEEE 802.11be(EHT40) - W56


Test Voltage		Normal Voltage				Remarks
Test Frequency (MHz)		5510	5590	5710	-	Low/Mid/High of test frequency range
Adjacent Channel Emitted Power	-40	33.49	33.17	32.55	dB	Limit ≥ 25 dB
	+40	31.58	32.39	33.80	dB	Limit ≥ 25 dB
	-80	40.86	42.39	41.20	dB	Limit ≥ 40 dB
	+80	41.23	41.74	41.54	dB	Limit ≥ 40 dB

CH102

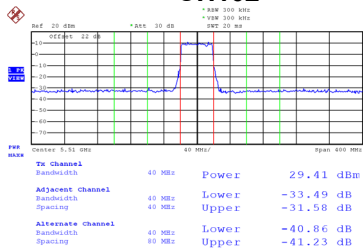


Date: 17.MAR.2026 14:15:05

CH118

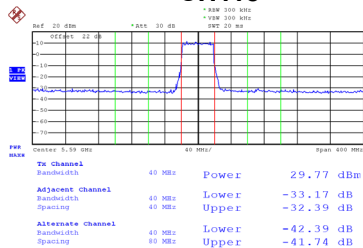

Date: 17.MAR.2026 14:17:32

CH142

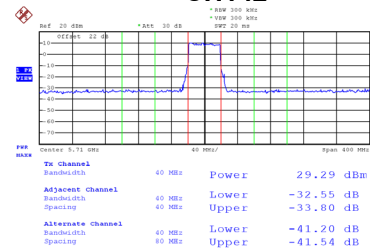


Date: 17.MAR.2026 14:20:36

Test Mode: IEEE 802.11be(EHT80) - W56


Test Voltage		Normal Voltage				Remarks
Test Frequency (MHz)		5530	5610	5690	-	Low/Mid/High of test frequency range
Adjacent Channel	-80	33.08	33.16	32.23	dB	Limit ≥ 25 dB
Emitted Power	+80	30.59	32.03	33.52	dB	Limit ≥ 25 dB

CH106

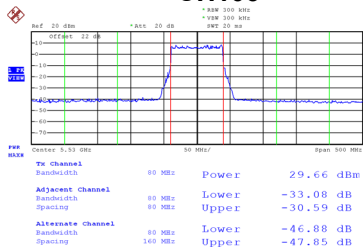


Date: 17.MAR.2026 15:47:13

CH122

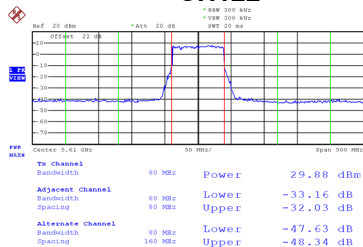

Date: 17.MAR.2026 15:48:24

CH138

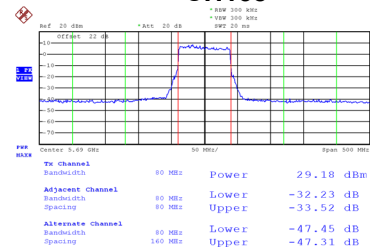

Date: 17.MAR.2026 15:49:38

APPENDIX F - LIMITATION OF COLLATERAL EMISSION OF RECEIVER

Vertical Antenna

Test Mode:	IEEE 802.11a - W52
------------	--------------------

Test Voltage		Normal Voltage			Remarks
Test Frequency (MHz)		5180	5200	5240	Low/Mid/High of test frequency range
Limitation of Collateral Emission of Receiver	MHz	697.36	968.96	755.56	Limit ≤ 4 nW (-54 dBm)
	nW	0.0185	0.0159	0.0151	
	MHz	24900.00	25000.00	24950.00	Limit ≤ 20 nW (-47 dBm)
	nW	1.9055	1.8281	1.9320	


Note:

Emission value = SA measurement value (Include correction factor and cable loss)

Correction factor = 10 log (X)


X = the total number of antennas

CH36

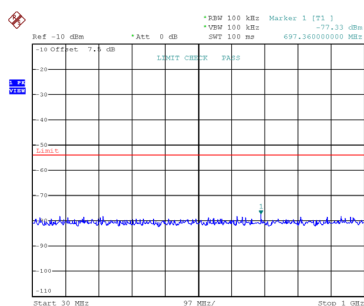


Date: 26.JAN.2026 16:57:12

CH40 f < 1GHz

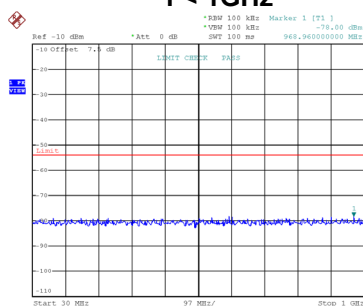


Date: 26.JAN.2026 17:23:26

CH48

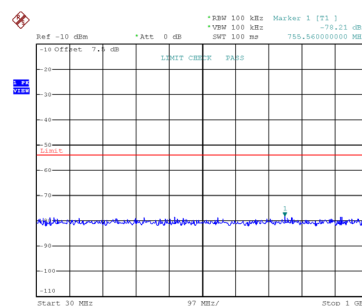


Date: 26.JAN.2026 17:24:51


f ≥ 1GHz

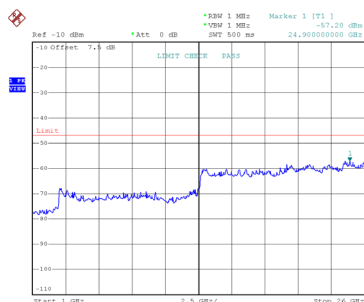

Date: 12.MAY.2026 15:49:20

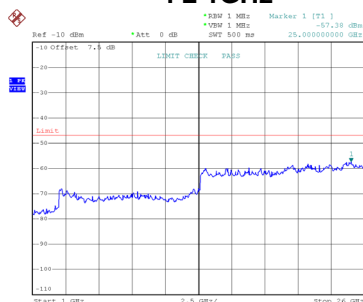

Date: 12.MAY.2026 15:49:41

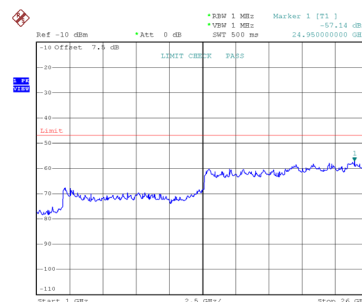

Date: 12.MAY.2026 15:51:46

Test Mode: IEEE 802.11ac(VHT20) - W52

Test Voltage		Normal Voltage			Remarks
Test Frequency (MHz)		5180	5200	5240	Low/Mid/High of test frequency range
Limitation of Collateral Emission of Receiver	MHz	796.30	912.70	935.98	Limit ≤ 4 nW (-54 dBm)
	nW	0.0151	0.0177	0.0151	
	MHz	24950.00	25050.00	24850.00	Limit ≤ 20 nW (-47 dBm)
	nW	1.8578	1.8750	1.8836	


Note:

Emission value = SA measurement value (Include correction factor and cable loss)

Correction factor = 10 log (X)


X = the total number of antennas

CH36

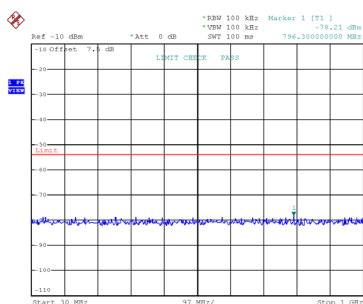


Date: 26.JAN.2026 19:18:35

CH40
f < 1GHz

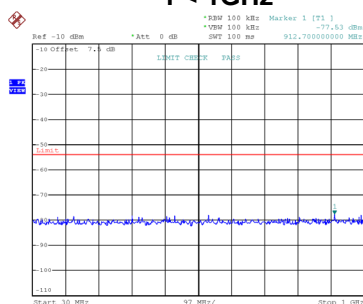


Date: 26.JAN.2026 19:19:00

CH48

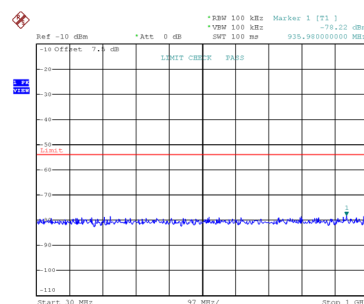


Date: 26.JAN.2026 19:19:20


f ≥ 1GHz

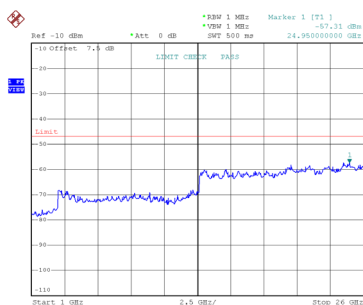

Date: 12.MAY.2026 15:58:21

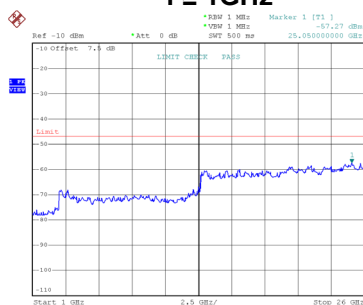

Date: 12.MAY.2026 15:58:33

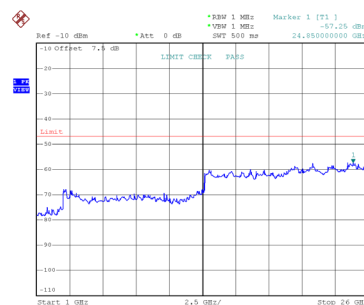

Date: 12.MAY.2026 15:59:16

Test Mode: IEEE 802.11ac(VHT40) - W52

Test Voltage		Normal Voltage		Remarks
Test Frequency (MHz)		5190	5230	Low/Mid/High of test frequency range
Limitation of Collateral Emission of Receiver	MHz	825.40	573.20	Limit ≤ 4 nW (-54 dBm)
	nW	0.0158	0.0157	
	MHz	24900.00	24850.00	Limit ≤ 20 nW (-47 dBm)
	nW	1.8113	1.7824	


Note:

Emission value = SA measurement value (Include correction factor and cable loss)

Correction factor = $10 \log(X)$


X = the total number of antennas

CH38

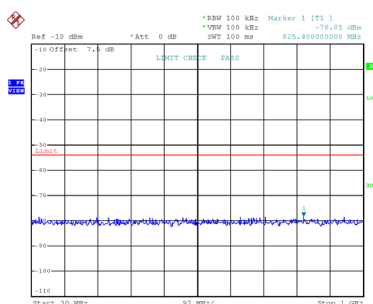


Date: 28.JAN.2026 10:36:55

CH46 f < 1GHz

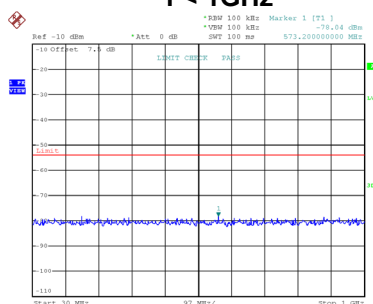


Date: 28.JAN.2026 10:37:39

f ≥ 1GHz

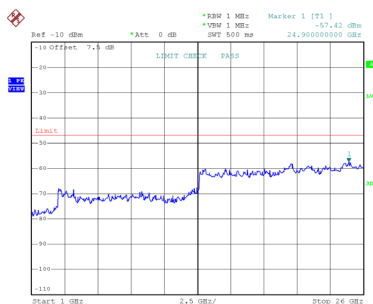

Date: 12.MAY.2026 16:39:49

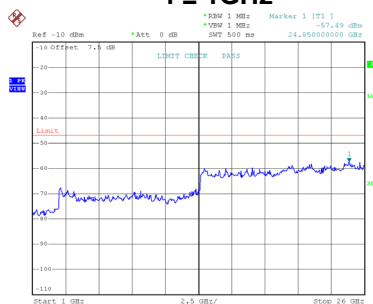


Date: 12.MAY.2026 16:40:01


Test Mode:	IEEE 802.11ac(VHT80) - W52
------------	----------------------------

Test Voltage		Normal Voltage	Remarks
Test Frequency (MHz)		5210	Low/Mid/High of test frequency range
Limitation of Collateral Emission of Receiver	MHz	829.28	Limit ≤ 4 nW (-54 dBm)
	nW	0.0171	
	MHz	24650.00	Limit ≤ 20 nW (-47 dBm)
	nW	1.7701	

Note:
Emission value = SA measurement value (Include correction factor and cable loss)
Correction factor = $10 \log (X)$
X = the total number of antennas

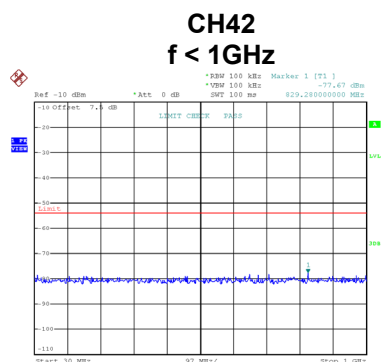

Date: 28.JAN.2026 11:26:35



Date: 12.MAY.2026 17:13:04

Test Mode: IEEE 802.11ax(HE20) - W52

Test Voltage		Normal Voltage			Remarks
Test Frequency (MHz)		5180	5200	5240	Low/Mid/High of test frequency range
Limitation of Collateral Emission of Receiver	MHz	515.00	497.54	871.96	Limit ≤ 4 nW (-54 dBm)
	nW	0.0265	0.0158	0.0159	
	MHz	24900.00	24500.00	25000.00	Limit ≤ 20 nW (-47 dBm)
	nW	1.8880	1.8707	1.7338	


Note:

Emission value = SA measurement value (Include correction factor and cable loss)

Correction factor = 10 log (X)


X = the total number of antennas

CH36

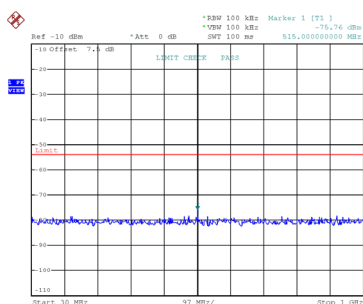


Date: 26.JAN.2026 14:31:57

CH40
f < 1GHz

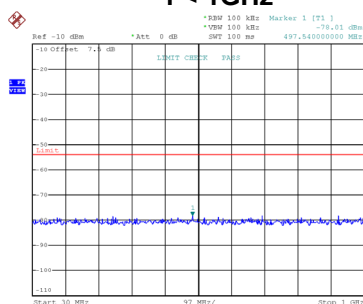


Date: 26.JAN.2026 14:32:19

CH48

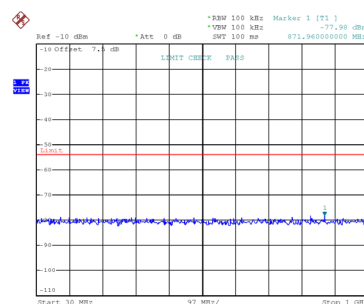


Date: 26.JAN.2026 14:34:46


f ≥ 1GHz

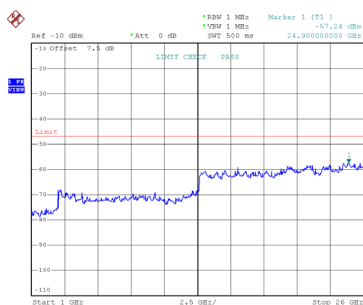

Date: 12.MAY.2026 16:09:24

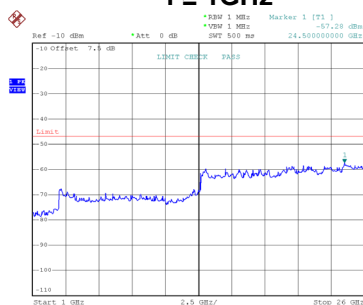

Date: 12.MAY.2026 16:09:36

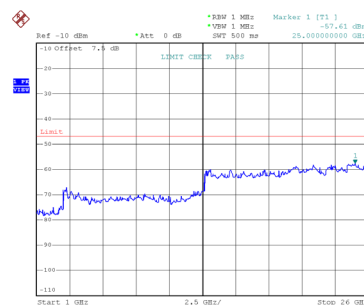

Date: 12.MAY.2026 16:09:49

Test Mode: IEEE 802.11ax(HE40) - W52

Test Voltage		Normal Voltage		Remarks
Test Frequency (MHz)		5190	5230	Low/Mid/High of test frequency range
Limitation of Collateral Emission of Receiver	MHz	996.12	635.28	Limit ≤ 4 nW (-54 dBm)
	nW	0.0170	0.0148	
	MHz	24500.00	24900.00	Limit ≤ 20 nW (-47 dBm)
	nW	1.7418	1.8707	


Note:

Emission value = SA measurement value (Include correction factor and cable loss)

Correction factor = $10 \log (X)$


X = the total number of antennas

CH38

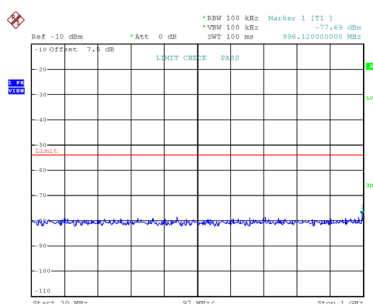


Date: 28.JAN.2026 15:34:03

CH46 f < 1GHz

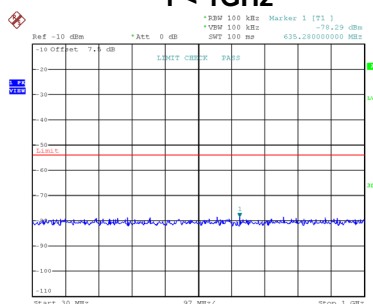


Date: 28.JAN.2026 15:34:28

f ≥ 1GHz

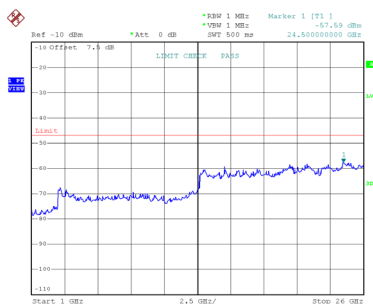

Date: 12.MAY.2026 16:51:34

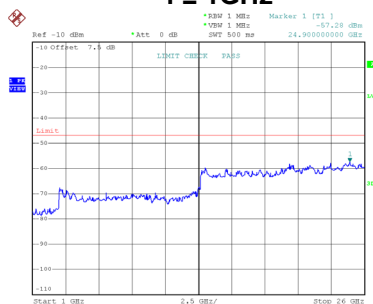

Date: 12.MAY.2026 16:51:45

Test Mode:	IEEE 802.11ax(HE80) - W52
------------	---------------------------


Test Voltage		Normal Voltage	Remarks
Test Frequency (MHz)		5210	Low/Mid/High of test frequency range
Limitation of Collateral Emission of Receiver	MHz	233.70	Limit ≤ 4 nW (-54 dBm)
	nW	0.0154	
	MHz	24800.00	Limit ≤ 20 nW (-47 dBm)
	nW	1.8880	

Note:


Emission value = SA measurement value (Include correction factor and cable loss)

Correction factor = $10 \log (X)$

X = the total number of antennas

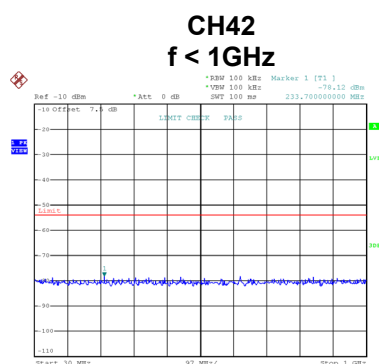

Date: 28.JAN.2026 16:08:50



Date: 12.MAY.2026 17:03:56

Test Mode: IEEE 802.11be(EHT20) - W52

Test Voltage		Normal Voltage			Remarks
Test Frequency (MHz)		5180	5200	5240	Low/Mid/High of test frequency range
Limitation of Collateral Emission of Receiver	MHz	515.00	497.54	871.96	Limit ≤ 4 nW (-54 dBm)
	nW	0.0265	0.0158	0.0159	
	MHz	24900.00	24500.00	25000.00	Limit ≤ 20 nW (-47 dBm)
	nW	1.8880	1.8707	1.7338	


Note:

Emission value = SA measurement value (Include correction factor and cable loss)

Correction factor = 10 log (X)


X = the total number of antennas

CH36

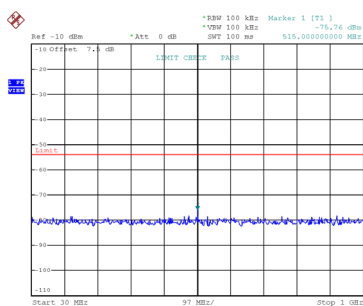


Date: 26.JAN.2026 14:31:57

CH40
f < 1GHz

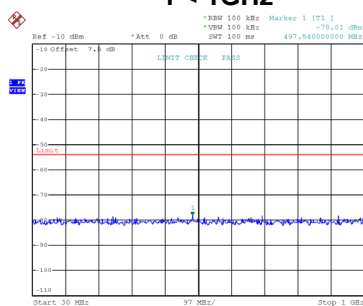


Date: 26.JAN.2026 14:32:19

CH48

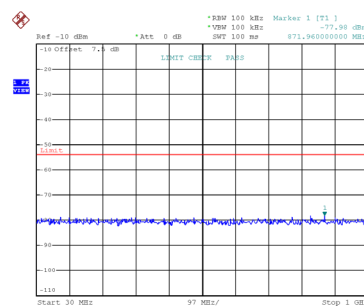


Date: 26.JAN.2026 14:34:46


f ≥ 1GHz

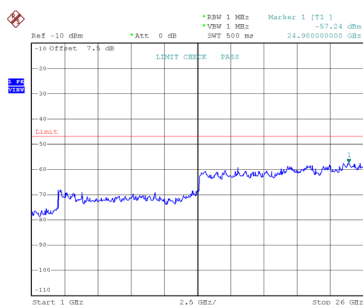

Date: 12.MAY.2026 16:09:24

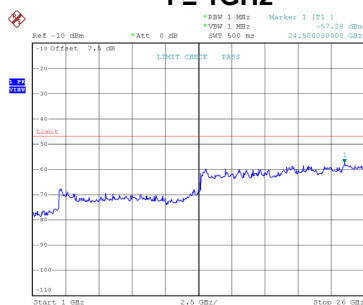

Date: 12.MAY.2026 16:09:36

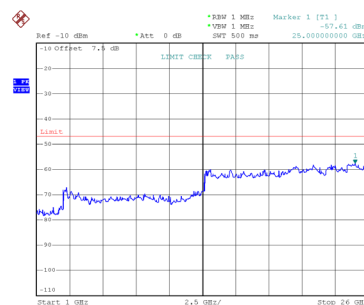

Date: 12.MAY.2026 16:09:49

Test Mode:	IEEE 802.11be(EHT40) - W52
------------	----------------------------

Test Voltage		Normal Voltage		Remarks
Test Frequency (MHz)		5190	5230	Low/Mid/High of test frequency range
Limitation of Collateral Emission of Receiver	MHz	996.12	635.28	Limit ≤ 4 nW (-54 dBm)
	nW	0.0170	0.0148	
	MHz	24500.00	24900.00	Limit ≤ 20 nW (-47 dBm)
	nW	1.7418	1.8707	


Note:

Emission value = SA measurement value (Include correction factor and cable loss)

Correction factor = $10 \log (X)$


X = the total number of antennas

CH38

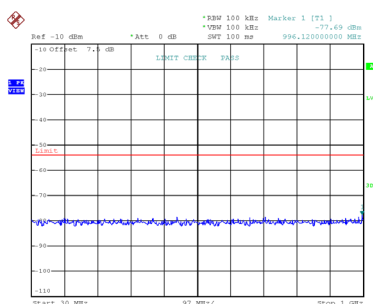


Date: 28.JAN.2026 15:34:03

CH46 f < 1GHz

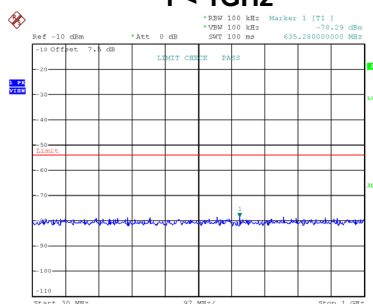


Date: 28.JAN.2026 15:34:28

f ≥ 1GHz

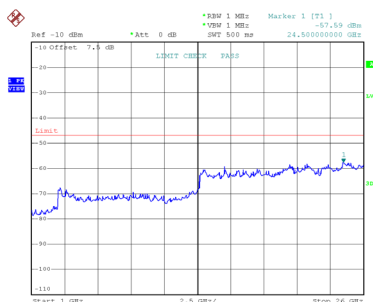

Date: 12.MAY.2026 16:51:34

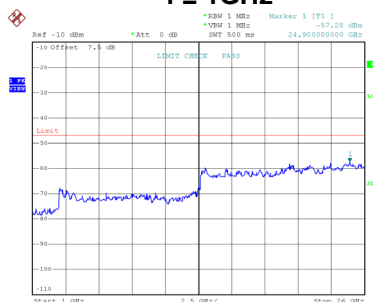


Date: 12.MAY.2026 16:51:45


Test Mode:	IEEE 802.11be(EHT80) - W52
------------	----------------------------

Test Voltage		Normal Voltage	Remarks
Test Frequency (MHz)		5210	Low/Mid/High of test frequency range
Limitation of Collateral Emission of Receiver	MHz	233.70	Limit ≤ 4 nW (-54 dBm)
	nW	0.0154	
	MHz	24800.00	Limit ≤ 20 nW (-47 dBm)
	nW	1.8880	

Note:
Emission value = SA measurement value (Include correction factor and cable loss)
Correction factor = $10 \log (X)$
X = the total number of antennas

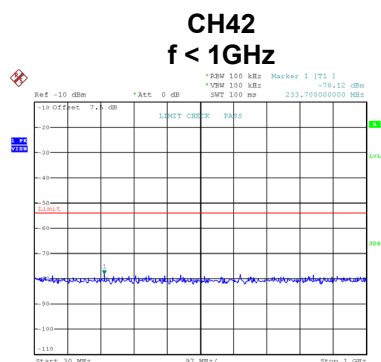

Date: 28.JAN.2026 16:08:50




Date: 12.MAY.2026 17:03:56

Test Mode:	IEEE 802.11a - W53
------------	--------------------

Test Voltage		Normal Voltage			Remarks
Test Frequency (MHz)		5260	5300	5320	Low/Mid/High of test frequency range
Limitation of Collateral Emission of Receiver	MHz	264.74	889.42	926.28	Limit ≤ 4 nW (-54 dBm)
	nW	0.0153	0.0167	0.0159	
	MHz	24900.00	24600.00	24850.00	Limit ≤ 20 nW (-47 dBm)
	nW	1.8493	1.8578	1.8836	


Note:
Emission value = SA measurement value (Include correction factor and cable loss)
Correction factor = 10 log (X)
X = the total number of antennas

CH52

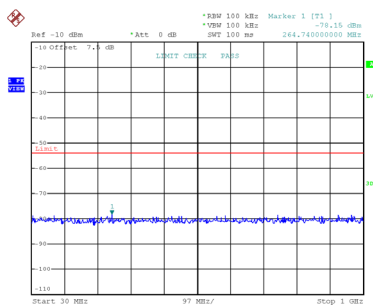


Date: 26.JAN.2026 17:25:22

CH60
f < 1GHz

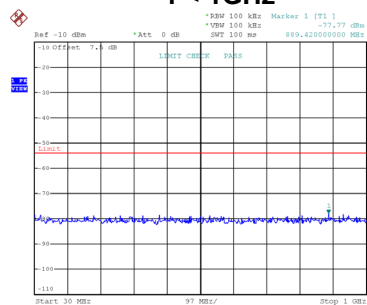


Date: 26.JAN.2026 17:27:50

CH64

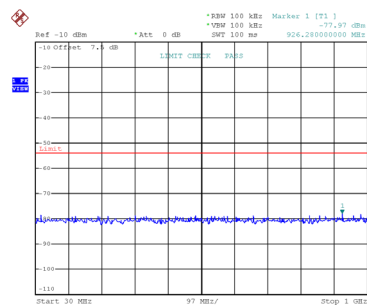


Date: 26.JAN.2026 17:28:24


f ≥ 1GHz

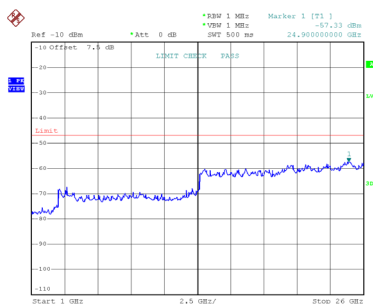

Date: 12.MAY.2026 15:53:18



Date: 12.MAY.2026 15:53:32



Date: 12.MAY.2026 15:54:40

Test Mode: IEEE 802.11ac(VHT20) - W53

Test Voltage		Normal Voltage			Remarks
Test Frequency (MHz)		5260	5300	5320	Low/Mid/High of test frequency range
Limitation of Collateral Emission of Receiver	MHz	408.30	487.84	30.00	Limit ≤ 4 nW (-54 dBm)
	nW	0.0160	0.0148	0.0151	
	MHz	24650.00	25350.00	24500.00	Limit ≤ 20 nW (-47 dBm)
	nW	1.8072	1.8493	1.7906	


Note:

Emission value = SA measurement value (Include correction factor and cable loss)

Correction factor = 10 log (X)


X = the total number of antennas

CH52

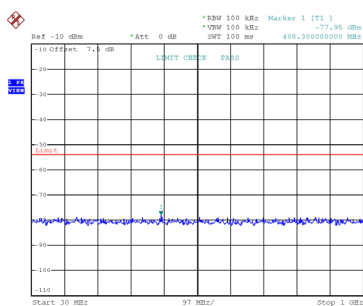


Date: 26.JAN.2026 19:19:41

CH60
f < 1GHz

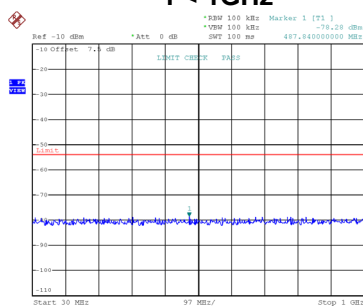


Date: 26.JAN.2026 19:20:02

CH64

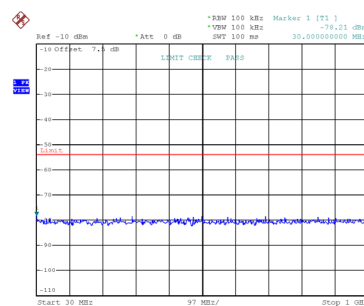


Date: 26.JAN.2026 19:20:24


f ≥ 1GHz

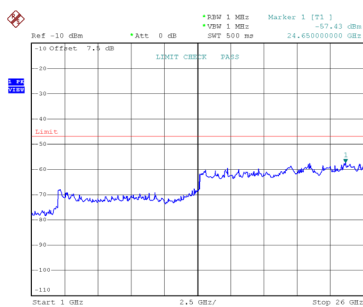

Date: 12.MAY.2026 15:59:48

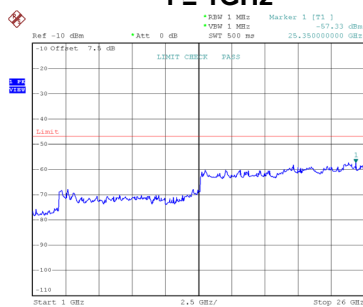

Date: 12.MAY.2026 15:59:59

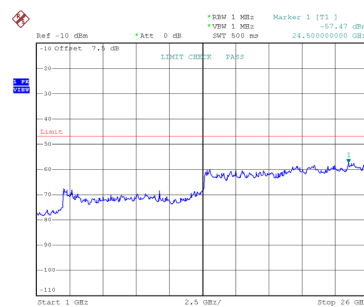

Date: 12.MAY.2026 16:00:31

Test Mode: IEEE 802.11ac(VHT40) - W53

Test Voltage		Normal Voltage		Remarks
Test Frequency (MHz)		5270	5310	Low/Mid/High of test frequency range
Limitation of Collateral Emission of Receiver	MHz	458.74	297.72	Limit ≤ 4 nW (-54 dBm)
	nW	0.0150	0.0151	
	MHz	24900.00	25000.00	Limit ≤ 20 nW (-47 dBm)
	nW	1.6711	1.7824	


Note:

Emission value = SA measurement value (Include correction factor and cable loss)


Correction factor = $10 \log (X)$

X = the total number of antennas



CH54

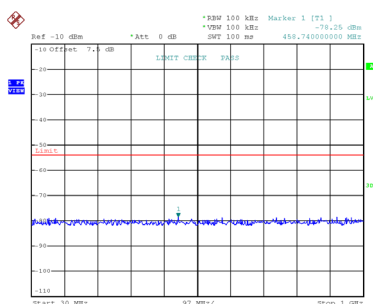

CH62 f < 1GHz

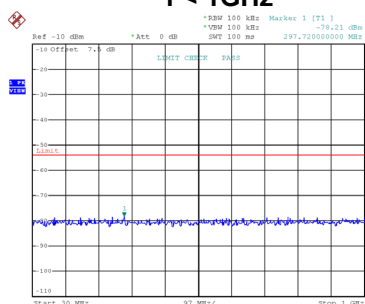

f ≥ 1GHz

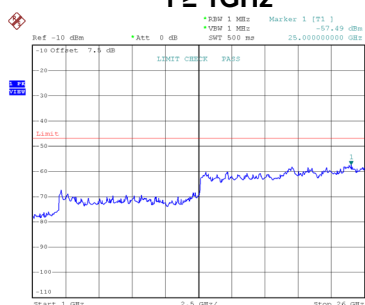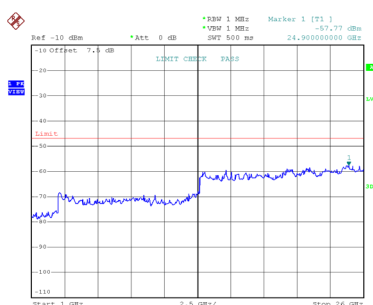

Test Mode:	IEEE 802.11ac(VHT80) - W53
------------	----------------------------



Test Voltage		Normal Voltage	Remarks
Test Frequency (MHz)		5290	Low/Mid/High of test frequency range
Limitation of Collateral Emission of Receiver	MHz	961.20	Limit ≤ 4 nW (-54 dBm)
	nW	0.0169	
	MHz	24550.00	Limit ≤ 20 nW (-47 dBm)
	nW	1.8923	

Note:

Emission value = SA measurement value (Include correction factor and cable loss)

Correction factor = $10 \log (X)$

X = the total number of antennas

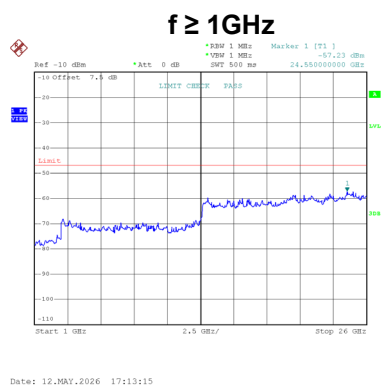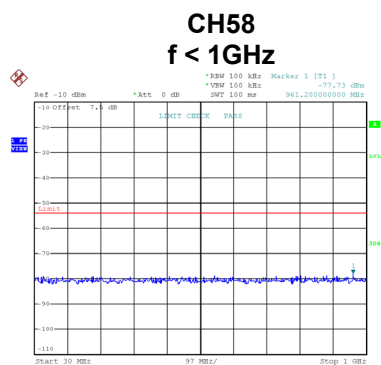

Test Mode:	IEEE 802.11ax(HE40) - W53
------------	---------------------------

Test Voltage		Normal Voltage		Remarks
Test Frequency (MHz)		5270	5310	Low/Mid/High of test frequency range
Limitation of Collateral Emission of Receiver	MHz	385.02	745.86	Limit ≤ 4 nW (-54 dBm)
	nW	0.0162	0.0149	
	MHz	21950.00	24500.00	Limit ≤ 20 nW (-47 dBm)
	nW	1.7579	1.7906	


Note:

Emission value = SA measurement value (Include correction factor and cable loss)

Correction factor = 10 log (X)


X = the total number of antennas

CH54

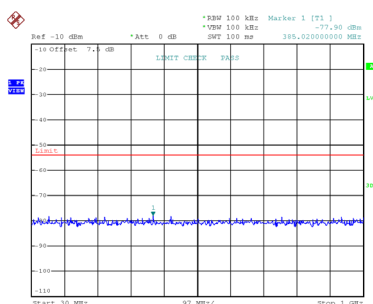


Date: 28.JAN.2026 15:34:50

CH62 f < 1GHz

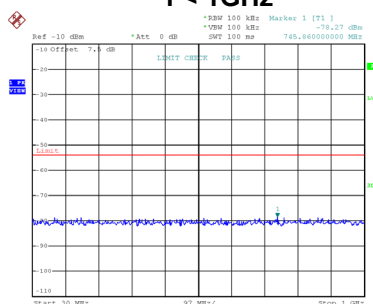


Date: 28.JAN.2026 15:35:12

f ≥ 1GHz

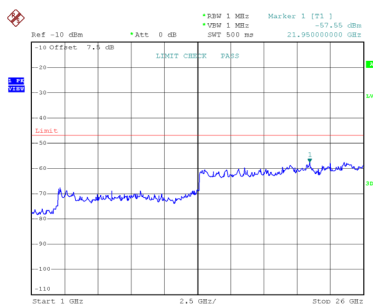

Date: 12.MAY.2026 16:52:35

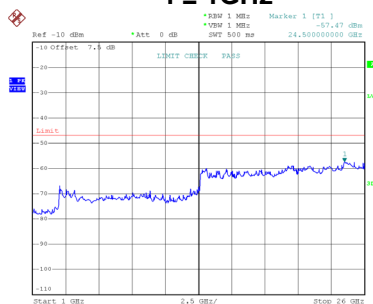

Date: 12.MAY.2026 16:53:05

Test Mode:	IEEE 802.11ax(HE80) - W53
------------	---------------------------

Test Voltage		Normal Voltage	Remarks
Test Frequency (MHz)		5290	Low/Mid/High of test frequency range
Limitation of Collateral Emission of Receiver	MHz	90.14	Limit ≤ 4 nW (-54 dBm)
	nW	0.0149	
	MHz	20650.00	Limit ≤ 20 nW (-47 dBm)
	nW	1.7219	


Note:

Emission value = SA measurement value (Include correction factor and cable loss)

Correction factor = $10 \log (X)$


X = the total number of antennas

CH58 f < 1GHz

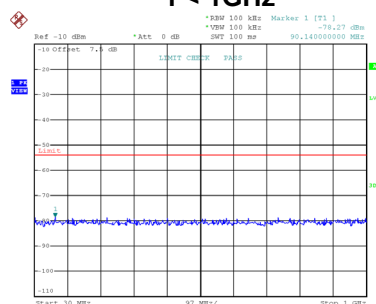

Date: 28.JAN.2026 16:10:03

f ≥ 1GHz

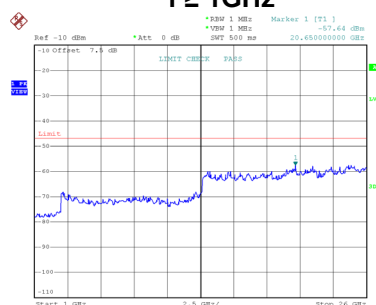

Date: 12.MAY.2026 17:04:06

Test Mode: IEEE 802.11be(EHT20) - W53

Test Voltage		Normal Voltage			Remarks
Test Frequency (MHz)		5260	5300	5320	Low/Mid/High of test frequency range
Limitation of Collateral Emission of Receiver	MHz	117.30	289.96	914.64	Limit ≤ 4 nW (-54 dBm)
	nW	0.0163	0.0172	0.0143	
	MHz	25100.00	24650.00	25050.00	Limit ≤ 20 nW (-47 dBm)
	nW	1.9543	1.9055	1.7579	


Note:

Emission value = SA measurement value (Include correction factor and cable loss)

Correction factor = 10 log (X)


X = the total number of antennas

CH52

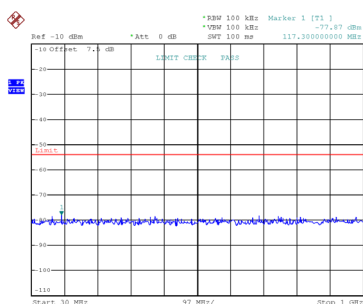


Date: 26.JAN.2026 14:35:28

CH60
f < 1GHz

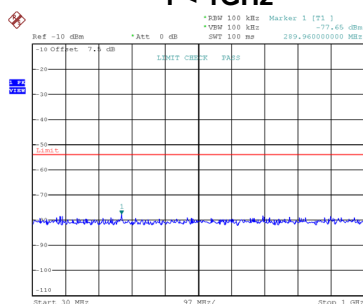


Date: 26.JAN.2026 14:35:50

CH64

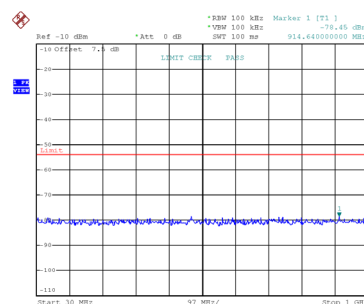


Date: 26.JAN.2026 14:36:12


f ≥ 1GHz

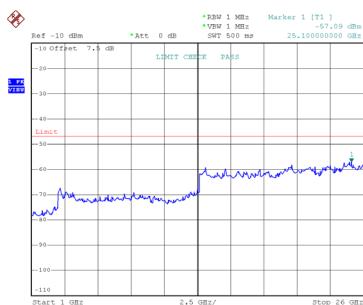

Date: 12.MAY.2026 16:10:00

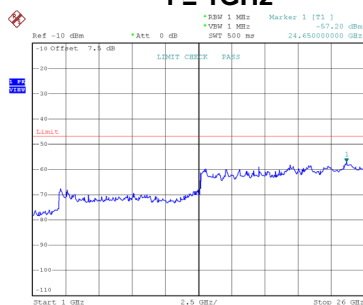

Date: 12.MAY.2026 16:10:11

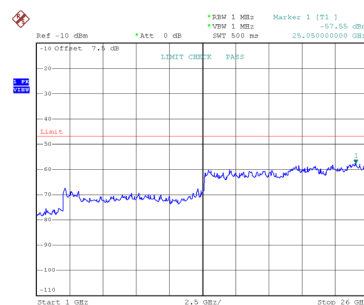

Date: 12.MAY.2026 16:11:30

Test Mode:	IEEE 802.11be(EHT40) - W53
------------	----------------------------

Test Voltage		Normal Voltage		Remarks
Test Frequency (MHz)		5270	5310	Low/Mid/High of test frequency range
Limitation of Collateral Emission of Receiver	MHz	385.02	745.86	Limit ≤ 4 nW (-54 dBm)
	nW	0.0162	0.0149	
	MHz	21950.00	24500.00	Limit ≤ 20 nW (-47 dBm)
	nW	1.7579	1.7906	


Note:

Emission value = SA measurement value (Include correction factor and cable loss)

Correction factor = 10 log (X)


X = the total number of antennas

CH54

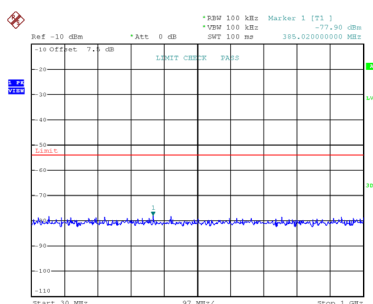


Date: 28.JAN.2026 15:34:50

CH62 f < 1GHz

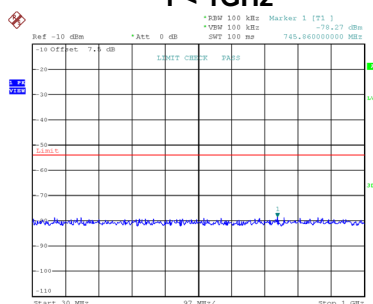


Date: 28.JAN.2026 15:35:12

f ≥ 1GHz

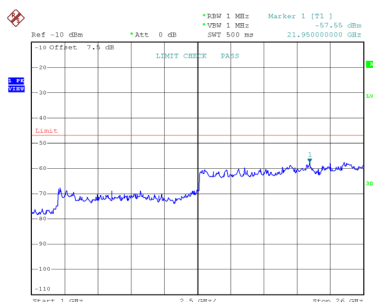

Date: 12.MAY.2026 16:52:35

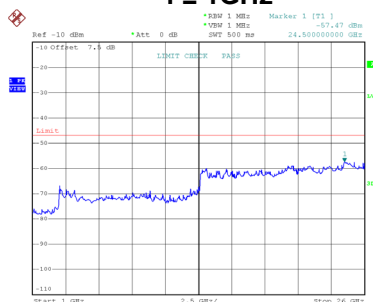

Date: 12.MAY.2026 16:53:05

Test Mode:	IEEE 802.11be(EHT80) - W53
------------	----------------------------

Test Voltage		Normal Voltage	Remarks
Test Frequency (MHz)		5290	Low/Mid/High of test frequency range
Limitation of Collateral Emission of Receiver	MHz	90.14	Limit ≤ 4 nW (-54 dBm)
	nW	0.0149	
	MHz	20650.00	Limit ≤ 20 nW (-47 dBm)
	nW	1.7219	


Note:

Emission value = SA measurement value (Include correction factor and cable loss)

Correction factor = $10 \log (X)$


X = the total number of antennas

CH58 f < 1GHz

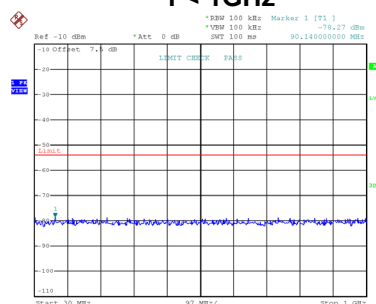

Date: 28.JAN.2026 16:10:03

f ≥ 1GHz

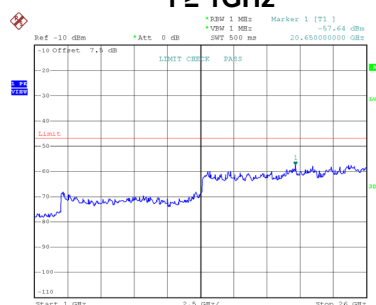

Date: 12.MAY.2026 17:04:06

Test Mode:	IEEE 802.11ac(VHT160) - W52+W53
------------	---------------------------------


Test Voltage		Normal Voltage	Remarks
Test Frequency (MHz)		5250	Low/Mid/High of test frequency range
Limitation of Collateral Emission of Receiver	MHz	546.04	Limit ≤ 4 nW (-54 dBm)
	nW	0.0173	
	MHz	25000.00	Limit ≤ 20 nW (-47 dBm)
	nW	1.7498	

Note:


Emission value = SA measurement value (Include correction factor and cable loss)

Correction factor = $10 \log (X)$

X = the total number of antennas

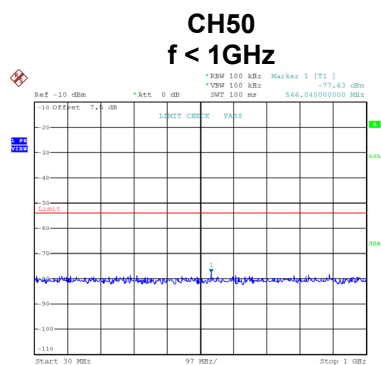

Date: 6.FEB.2026 13:39:54

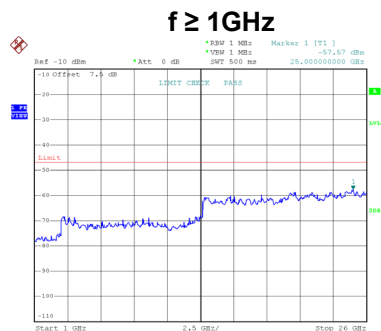

Date: 12.MAY.2026 17:14:55

Test Mode:	IEEE 802.11ax(HE160) - W52+W53
------------	--------------------------------



Test Voltage		Normal Voltage	Remarks
Test Frequency (MHz)		5250	Low/Mid/High of test frequency range
Limitation of Collateral Emission of Receiver	MHz	233.70	Limit ≤ 4 nW (-54 dBm)
	nW	0.0198	
	MHz	25050.00	Limit ≤ 20 nW (-47 dBm)
	nW	1.7100	

Note:

Emission value = SA measurement value (Include correction factor and cable loss)

Correction factor = $10 \log (X)$

X = the total number of antennas

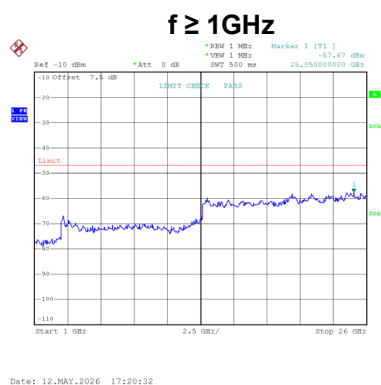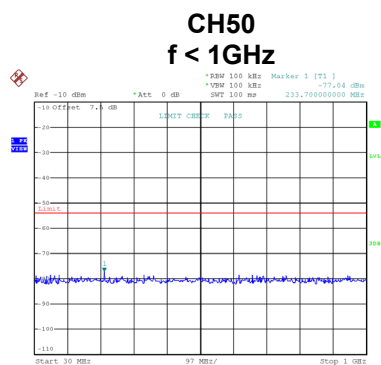

Test Mode:	IEEE 802.11be(EHT160) - W52+W53
------------	---------------------------------


Test Voltage		Normal Voltage	Remarks
Test Frequency (MHz)		5250	Low/Mid/High of test frequency range
Limitation of Collateral Emission of Receiver	MHz	233.70	Limit ≤ 4 nW (-54 dBm)
	nW	0.0198	
	MHz	25050.00	Limit ≤ 20 nW (-47 dBm)
	nW	1.7100	

Note:


Emission value = SA measurement value (Include correction factor and cable loss)

Correction factor = $10 \log (X)$

X = the total number of antennas

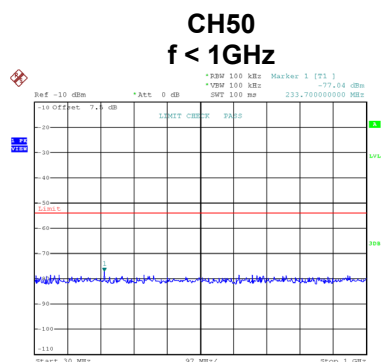

Date: 28.JAN.2026 16:33:52



Date: 12.MAY.2026 17:20:32

Test Mode: IEEE 802.11a - W56

Test Voltage		Normal Voltage			Remarks
Test Frequency (MHz)		5500	5600	5720	Low/Mid/High of test frequency range
Limitation of Collateral Emission of Receiver	MHz	196.84	233.70	745.86	Limit ≤ 4 nW (-54 dBm)
	nW	0.0147	0.0170	0.0194	
	MHz	25000.00	24500.00	24500.00	Limit ≤ 20 nW (-47 dBm)
	nW	1.7947	1.9634	1.8030	


Note:

Emission value = SA measurement value (Include correction factor and cable loss)

Correction factor = $10 \log (X)$


X = the total number of antennas

CH100

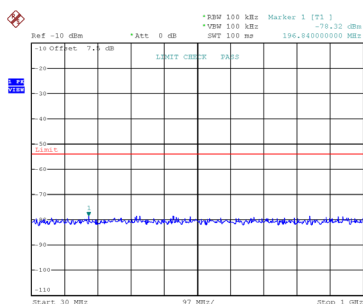


Date: 26.JAN.2026 17:28:48

CH120
f < 1GHz

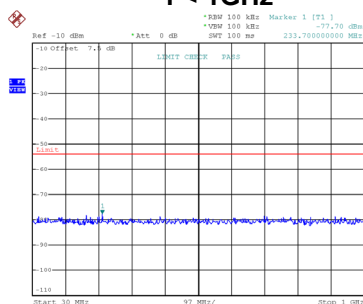


Date: 26.JAN.2026 17:29:08

CH144

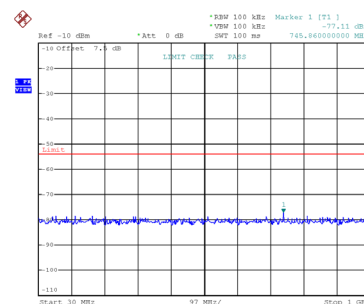


Date: 26.JAN.2026 17:29:29


f ≥ 1GHz

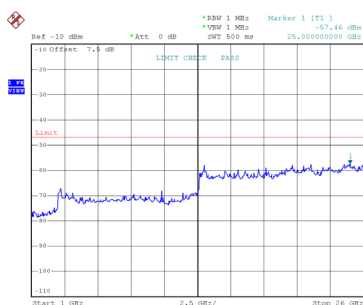

Date: 12.MAY.2026 15:54:52

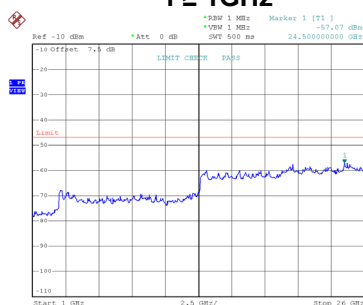

Date: 12.MAY.2026 15:55:24

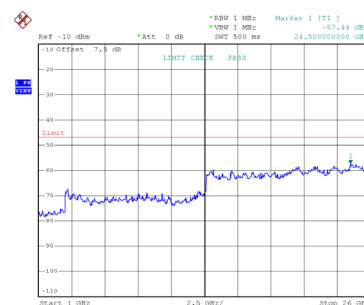

Date: 12.MAY.2026 15:55:35

Test Mode: IEEE 802.11ac(VHT20) - W56

Test Voltage		Normal Voltage			Remarks
Test Frequency (MHz)		5500	5600	5720	Low/Mid/High of test frequency range
Limitation of Collateral Emission of Receiver	MHz	340.40	604.24	984.48	Limit ≤ 4 nW (-54 dBm)
	nW	0.0173	0.0157	0.0164	
	MHz	24900.00	24550.00	24600.00	Limit ≤ 20 nW (-47 dBm)
	nW	1.9770	1.9055	1.8967	


Note:

Emission value = SA measurement value (Include correction factor and cable loss)

Correction factor = $10 \log (X)$


X = the total number of antennas

CH100

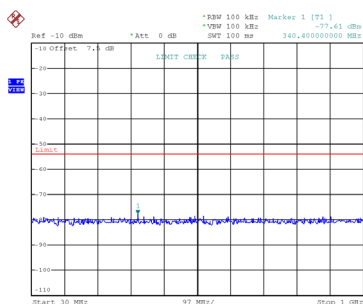


Date: 26.JAN.2026 19:20:49

CH120
f < 1GHz

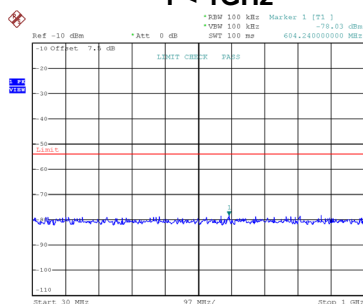


Date: 26.JAN.2026 19:21:21

CH144

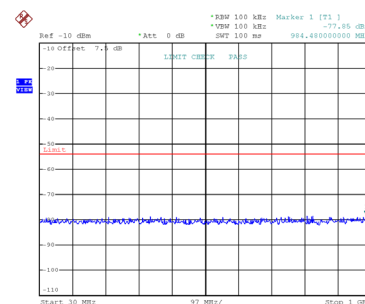


Date: 26.JAN.2026 19:21:47


f ≥ 1GHz

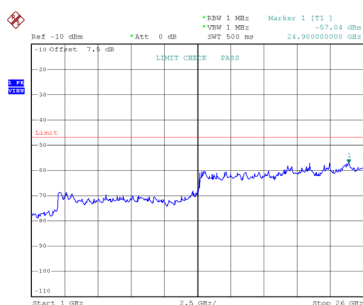

Date: 12.MAY.2026 16:02:04

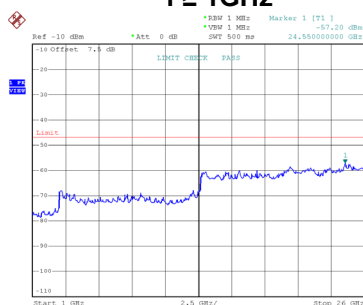

Date: 12.MAY.2026 16:02:18

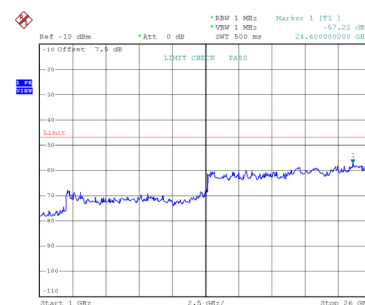

Date: 12.MAY.2026 16:02:29

Test Mode: IEEE 802.11ac(VHT40) - W56

Test Voltage		Normal Voltage			Remarks
Test Frequency (MHz)		5510	5590	5710	Low/Mid/High of test frequency range
Limitation of Collateral Emission of Receiver	MHz	503.36	722.58	220.12	Limit ≤ 4 nW (-54 dBm)
	nW	0.0155	0.0163	0.0191	
	MHz	23300.00	23950.00	25450.00	Limit ≤ 20 nW (-47 dBm)
	nW	1.8323	1.9679	1.7539	


Note:

Emission value = SA measurement value (Include correction factor and cable loss)

Correction factor = 10 log (X)


X = the total number of antennas

CH102

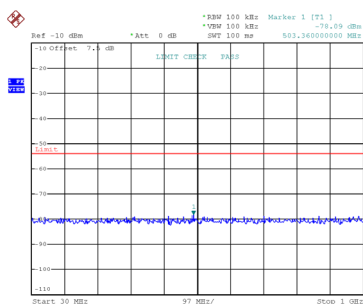


Date: 26.JAN.2026 10:38:52

CH118
f < 1GHz

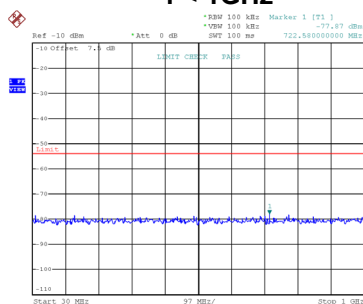


Date: 26.JAN.2026 10:39:20

CH142

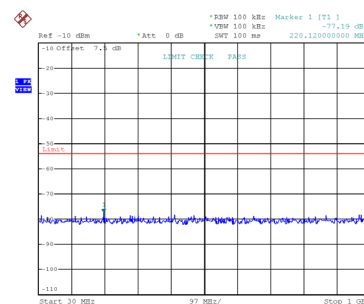


Date: 26.JAN.2026 10:40:20


f ≥ 1GHz

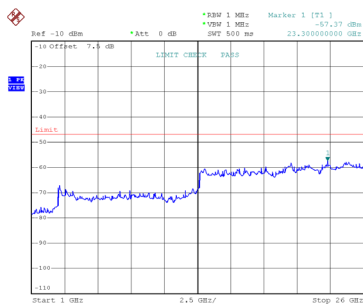

Date: 12.MAY.2026 16:40:58

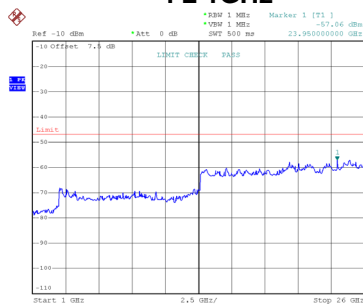

Date: 12.MAY.2026 16:41:09

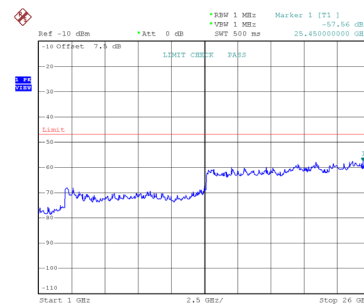

Date: 12.MAY.2026 16:41:23

Test Mode: IEEE 802.11ac(VHT80) - W56

Test Voltage		Normal Voltage			Remarks
Test Frequency (MHz)		5530	5610	5690	Low/Mid/High of test frequency range
Limitation of Collateral Emission of Receiver	MHz	95.96	423.82	291.90	Limit ≤ 4 nW (-54 dBm)
	nW	0.0160	0.0161	0.0168	
	MHz	24450.00	24600.00	24850.00	Limit ≤ 20 nW (-47 dBm)
	nW	1.8880	1.8578	1.7022	


Note:

Emission value = SA measurement value (Include correction factor and cable loss)

Correction factor = 10 log (X)


X = the total number of antennas

CH106

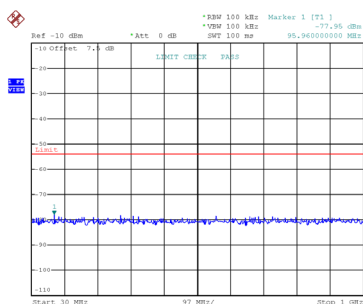


Date: 28.JAN.2026 11:27:20

CH122
f < 1GHz

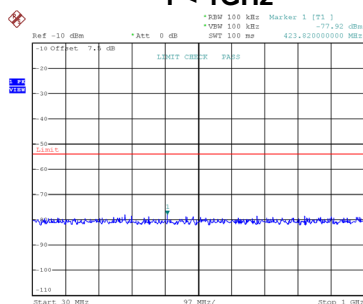


Date: 28.JAN.2026 11:27:42

CH138

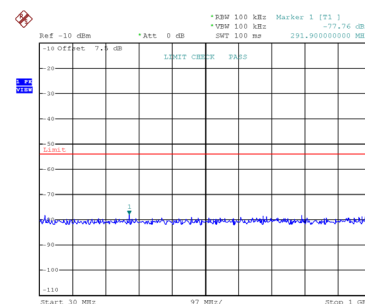


Date: 28.JAN.2026 11:28:04


f ≥ 1GHz

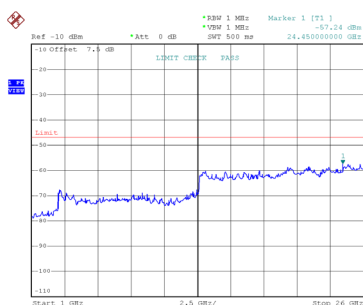

Date: 12.MAY.2026 17:13:26

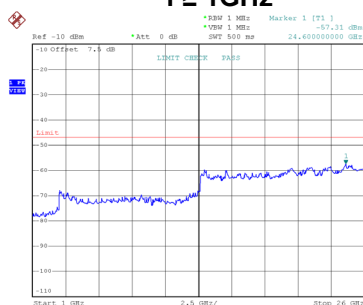

Date: 12.MAY.2026 17:13:43

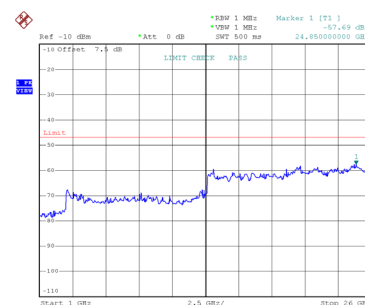

Date: 12.MAY.2026 17:14:11

Test Mode: IEEE 802.11ac(VHT160) - W56

Test Voltage		Normal Voltage	Remarks
Test Frequency (MHz)		5570	Low/Mid/High of test frequency range
Limitation of Collateral Emission of Receiver	MHz	788.54	Limit ≤ 4 nW (-54 dBm)
	nW	0.0147	
	MHz	25750.00	Limit ≤ 20 nW (-47 dBm)
	nW	1.7022	


Note:

Emission value = SA measurement value (Include correction factor and cable loss)

Correction factor = $10 \log (X)$


X = the total number of antennas

CH114 f < 1GHz

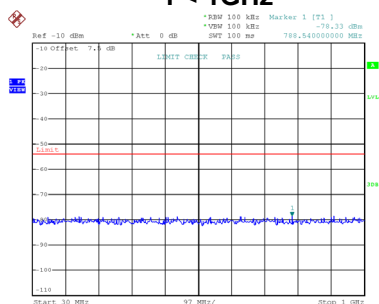

Date: 6.FEB.2026 13:40:14

f ≥ 1GHz

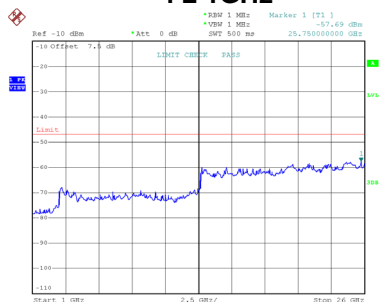

Date: 12.MAY.2026 17:16:12

Test Mode: IEEE 802.11ax(HE20) - W56

Test Voltage		Normal Voltage			Remarks
Test Frequency (MHz)		5500	5600	5720	Low/Mid/High of test frequency range
Limitation of Collateral Emission of Receiver	MHz	249.22	959.26	472.32	Limit ≤ 4 nW (-54 dBm)
	nW	0.0171	0.0185	0.0196	
	MHz	24500.00	24800.00	24750.00	Limit ≤ 20 nW (-47 dBm)
	nW	1.8155	1.9143	1.9231	


Note:

Emission value = SA measurement value (Include correction factor and cable loss)

Correction factor = 10 log (X)


X = the total number of antennas

CH100

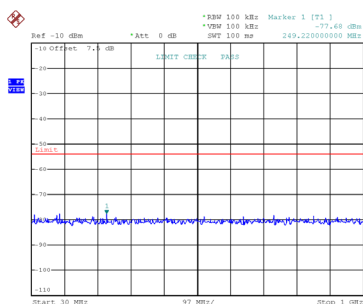


Date: 28.JAN.2026 14:36:35

CH120
f < 1GHz

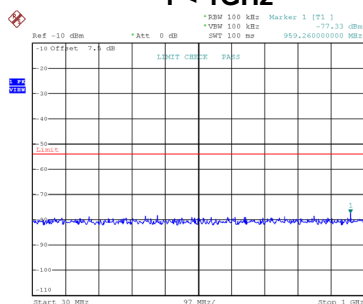


Date: 28.JAN.2026 14:37:00

CH144

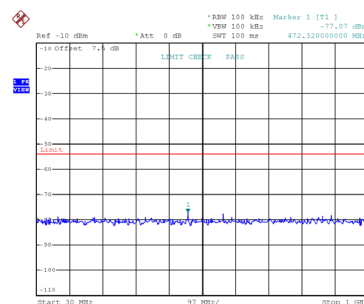


Date: 28.JAN.2026 14:37:22


f ≥ 1GHz

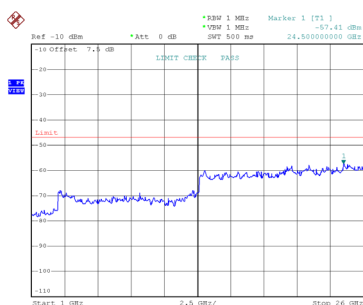

Date: 12.MAY.2026 16:11:41

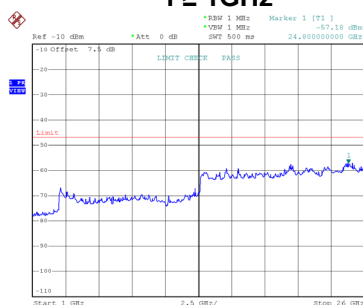

Date: 12.MAY.2026 16:11:53

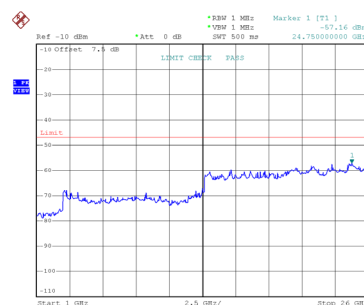

Date: 12.MAY.2026 16:13:02

Test Mode: IEEE 802.11ax(HE40) - W56

Test Voltage		Normal Voltage			Remarks
Test Frequency (MHz)		5510	5590	5710	Low/Mid/High of test frequency range
Limitation of Collateral Emission of Receiver	MHz	718.70	955.38	759.44	Limit ≤ 4 nW (-54 dBm)
	nW	0.0164	0.0169	0.0158	
	MHz	24850.00	24450.00	24800.00	Limit ≤ 20 nW (-47 dBm)
	nW	1.9724	1.9055	1.7742	


Note:

Emission value = SA measurement value (Include correction factor and cable loss)

Correction factor = 10 log (X)


X = the total number of antennas

CH102

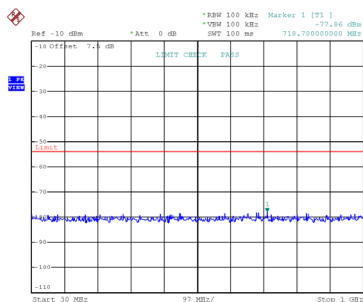


Date: 26.JAN.2026 15:35:35

CH118
f < 1GHz

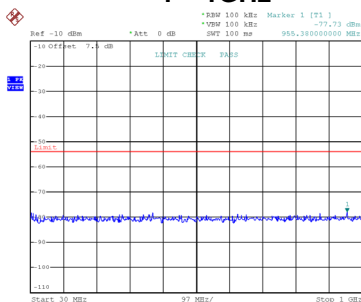


Date: 26.JAN.2026 15:35:57

CH142

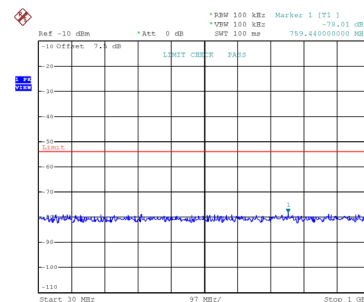


Date: 26.JAN.2026 15:36:10


f ≥ 1GHz

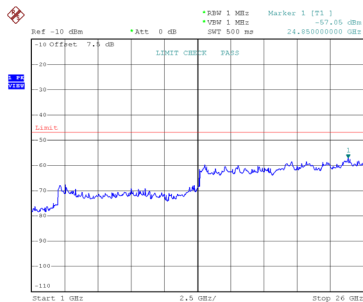

Date: 12.MAY.2026 16:53:16

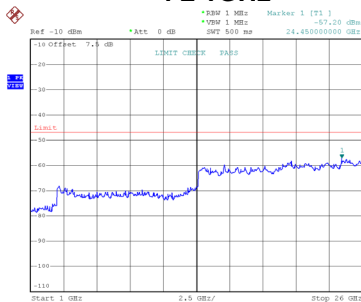

Date: 12.MAY.2026 16:53:28

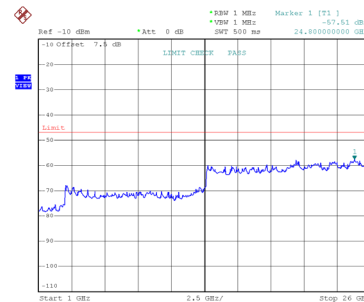

Date: 12.MAY.2026 16:54:14

Test Mode: IEEE 802.11ax(HE80) - W56

Test Voltage		Normal Voltage			Remarks
Test Frequency (MHz)		5530	5610	5690	Low/Mid/High of test frequency range
Limitation of Collateral Emission of Receiver	MHz	984.48	499.48	802.12	Limit ≤ 4 nW (-54 dBm)
	nW	0.0171	0.0162	0.0174	
	MHz	24500.00	24550.00	24900.00	Limit ≤ 20 nW (-47 dBm)
	nW	1.8493	1.7947	1.7579	


Note:

Emission value = SA measurement value (Include correction factor and cable loss)

Correction factor = 10 log (X)


X = the total number of antennas

CH106

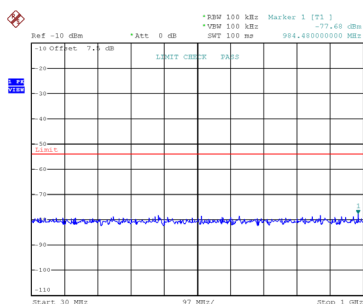


Date: 28.JAN.2026 16:10:23

CH122
f < 1GHz

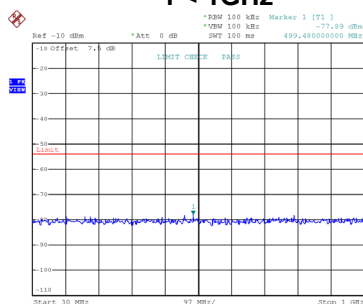


Date: 28.JAN.2026 16:10:47

CH138

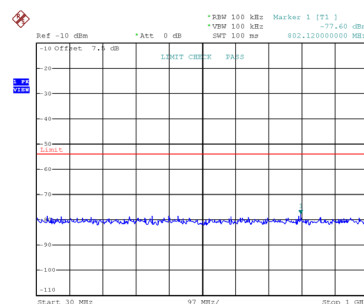


Date: 28.JAN.2026 16:11:53


f ≥ 1GHz

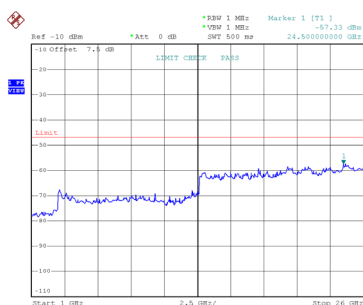

Date: 12.MAY.2026 17:05:13

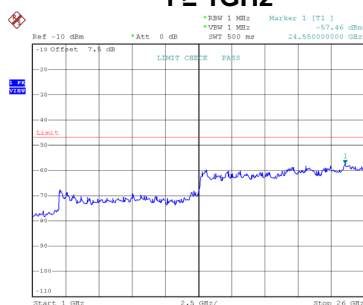

Date: 12.MAY.2026 17:05:25

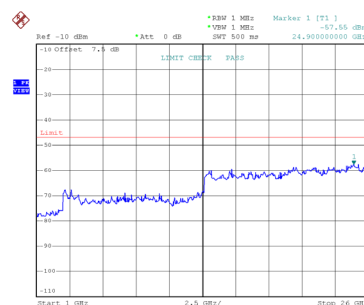

Date: 12.MAY.2026 17:05:54

Test Mode:	IEEE 802.11ax(HE160) - W56
------------	----------------------------

Test Voltage		Normal Voltage	Remarks
Test Frequency (MHz)		5570	Low/Mid/High of test frequency range
Limitation of Collateral Emission of Receiver	MHz	187.14	Limit ≤ 4 nW (-54 dBm)
	nW	0.0182	
	MHz	23400.00	Limit ≤ 20 nW (-47 dBm)
	nW	1.7498	


Note:

Emission value = SA measurement value (Include correction factor and cable loss)

Correction factor = $10 \log (X)$


X = the total number of antennas

CH114 f < 1GHz

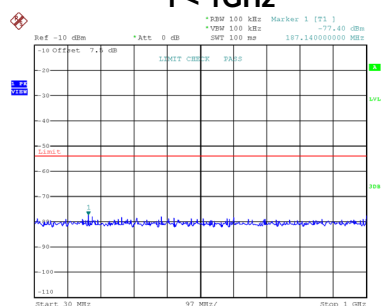

Date: 28.JAN.2026 16:34:14

f ≥ 1GHz

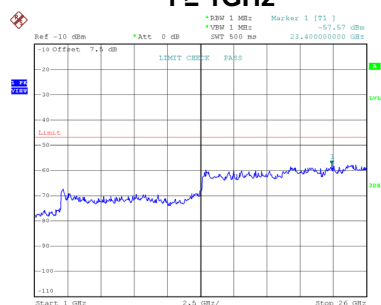

Date: 12.MAY.2026 17:20:48

Test Mode: IEEE 802.11be(EHT20) - W56

Test Voltage		Normal Voltage			Remarks
Test Frequency (MHz)		5500	5600	5720	Low/Mid/High of test frequency range
Limitation of Collateral Emission of Receiver	MHz	249.22	959.26	472.32	Limit ≤ 4 nW (-54 dBm)
	nW	0.0171	0.0185	0.0196	
	MHz	24500.00	24800.00	24750.00	Limit ≤ 20 nW (-47 dBm)
	nW	1.8155	1.9143	1.9231	


Note:

Emission value = SA measurement value (Include correction factor and cable loss)

Correction factor = 10 log (X)


X = the total number of antennas

CH100

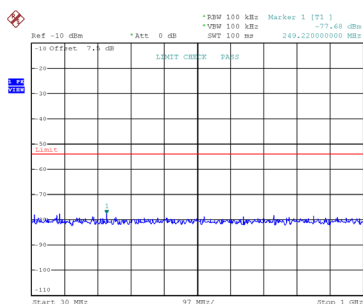


Date: 28.JAN.2026 14:36:35

CH120
f < 1GHz

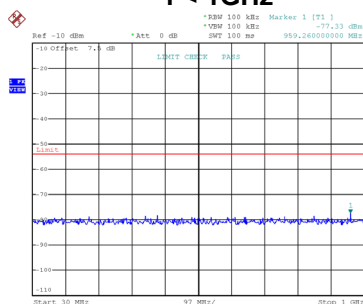


Date: 28.JAN.2026 14:37:00

CH144

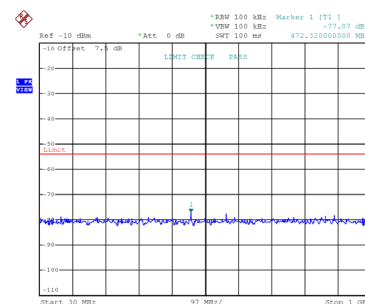


Date: 28.JAN.2026 14:37:22


f ≥ 1GHz

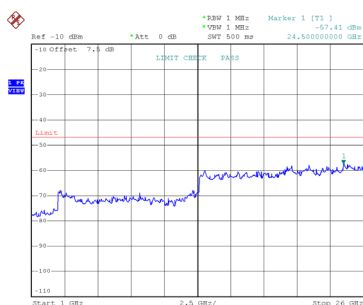

Date: 12.MAY.2026 16:11:41

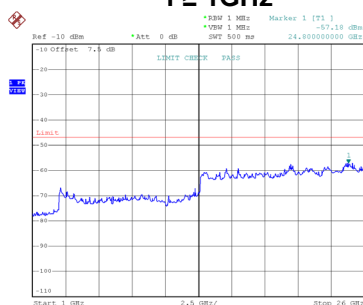

Date: 12.MAY.2026 16:11:53

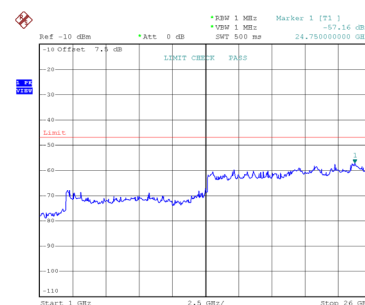

Date: 12.MAY.2026 16:13:02

Test Mode: IEEE 802.11be(EHT40) - W56

Test Voltage		Normal Voltage			Remarks
Test Frequency (MHz)		5510	5590	5710	Low/Mid/High of test frequency range
Limitation of Collateral Emission of Receiver	MHz	718.70	955.38	759.44	Limit ≤ 4 nW (-54 dBm)
	nW	0.0164	0.0169	0.0158	
	MHz	24850.00	24450.00	24800.00	Limit ≤ 20 nW (-47 dBm)
	nW	1.9724	1.9055	1.7742	


Note:

Emission value = SA measurement value (Include correction factor and cable loss)

Correction factor = 10 log (X)


X = the total number of antennas

CH102

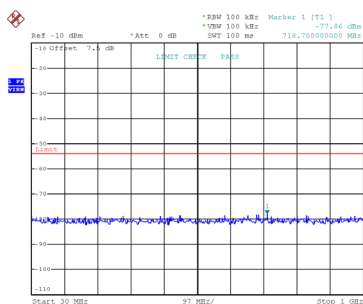


Date: 26.JAN.2026 15:35:35

CH118
f < 1GHz

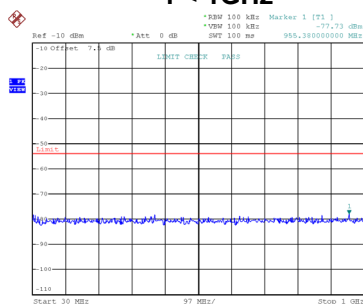


Date: 26.JAN.2026 15:35:57

CH142

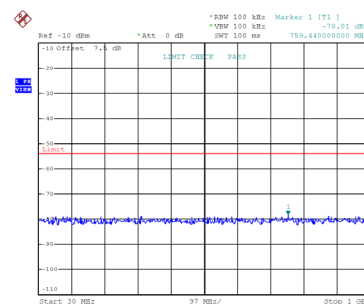


Date: 26.JAN.2026 15:36:10


f ≥ 1GHz

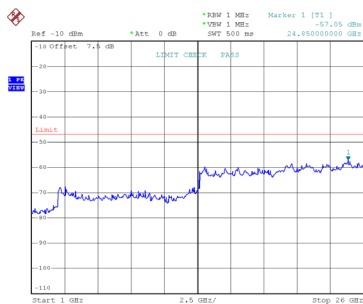

Date: 12.MAY.2026 16:53:16

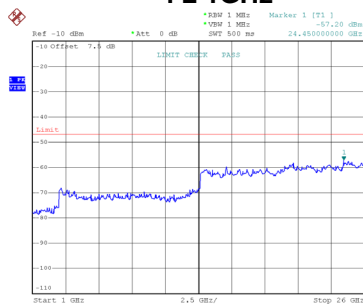

Date: 12.MAY.2026 16:53:28

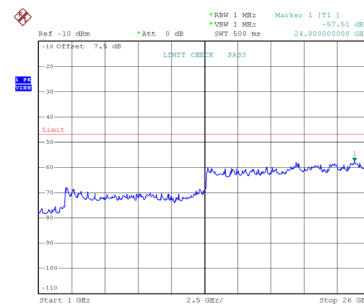

Date: 12.MAY.2026 16:54:14

Test Mode: IEEE 802.11be(EHT80) - W56

Test Voltage		Normal Voltage			Remarks
Test Frequency (MHz)		5530	5610	5690	Low/Mid/High of test frequency range
Limitation of Collateral Emission of Receiver	MHz	984.48	499.48	802.12	Limit ≤ 4 nW (-54 dBm)
	nW	0.0171	0.0162	0.0174	
	MHz	24500.00	24550.00	24900.00	Limit ≤ 20 nW (-47 dBm)
	nW	1.8493	1.7947	1.7579	


Note:

Emission value = SA measurement value (Include correction factor and cable loss)

Correction factor = $10 \log (X)$


X = the total number of antennas

CH106

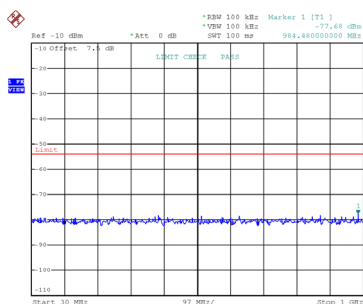


Date: 28.JAN.2026 16:10:23

CH122
f < 1GHz

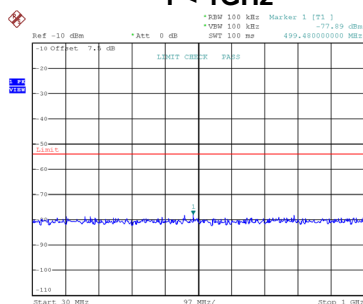


Date: 28.JAN.2026 16:10:47

CH138

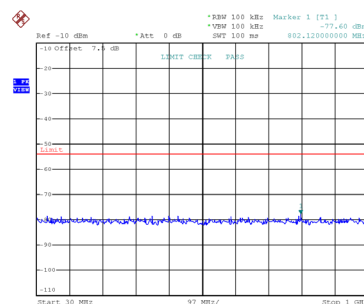


Date: 28.JAN.2026 16:11:53


f ≥ 1GHz

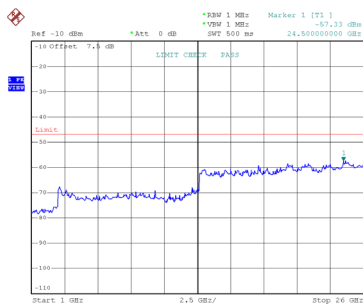

Date: 12.MAY.2026 17:05:13

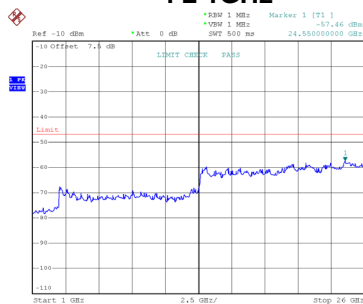

Date: 12.MAY.2026 17:05:25

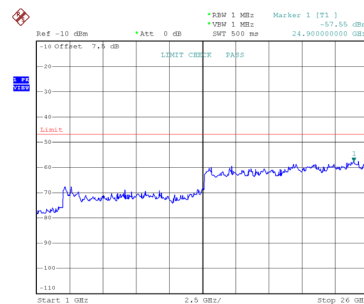

Date: 12.MAY.2026 17:05:54

Test Mode:	IEEE 802.11be(EHT160) - W56
------------	-----------------------------

Test Voltage		Normal Voltage	Remarks
Test Frequency (MHz)		5570	Low/Mid/High of test frequency range
Limitation of Collateral Emission of Receiver	MHz	187.14	Limit ≤ 4 nW (-54 dBm)
	nW	0.0182	
	MHz	23400.00	Limit ≤ 20 nW (-47 dBm)
	nW	1.7498	


Note:

Emission value = SA measurement value (Include correction factor and cable loss)

Correction factor = $10 \log (X)$


X = the total number of antennas

CH114 f < 1GHz

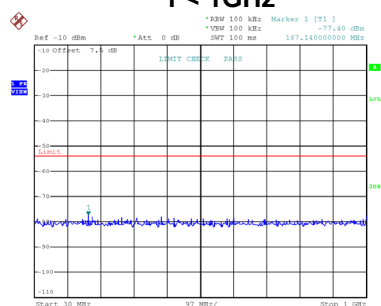

Date: 28.JAN.2026 16:34:14

f ≥ 1GHz

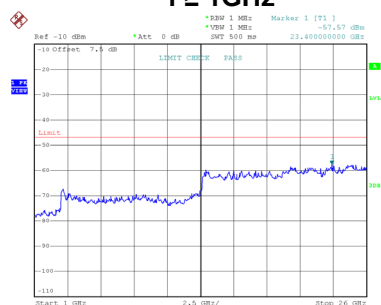

Date: 12.MAY.2026 17:20:48

Horizontal Antenna

Test Mode:	IEEE 802.11a - W52
------------	--------------------

Test Voltage		Normal Voltage			Remarks
Test Frequency (MHz)		5180	5200	5240	Low/Mid/High of test frequency range
Limitation of Collateral Emission of Receiver	MHz	390.84	142.52	720.64	Limit ≤ 4 nW (-54 dBm)
	nW	0.0146	0.0175	0.0172	
	MHz	25300.00	24850.00	24650.00	Limit ≤ 20 nW (-47 dBm)
	nW	1.9231	1.7579	1.7579	


Note:

Emission value = SA measurement value (Include correction factor and cable loss)

Correction factor = 10 log (X)


X = the total number of antennas

CH36

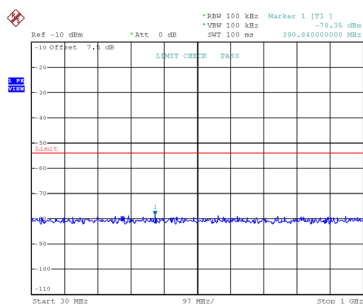


Date: 14.MAR.2026 17:10:36

CH40 f < 1GHz

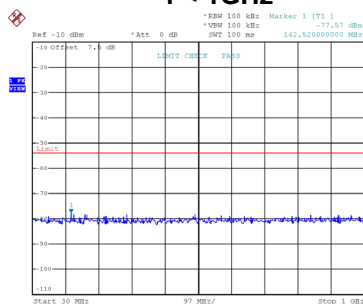


Date: 14.MAR.2026 17:10:57

CH48

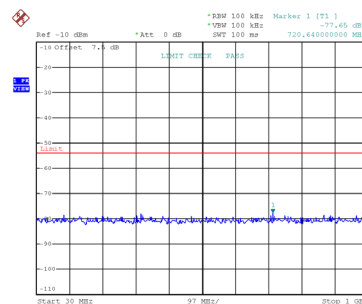


Date: 14.MAR.2026 17:11:26


f ≥ 1GHz

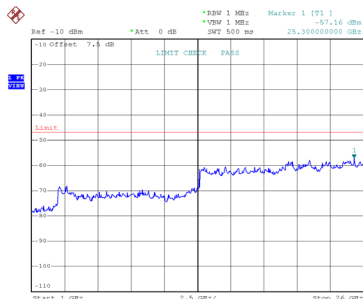

Date: 13.MAY.2026 17:08:59

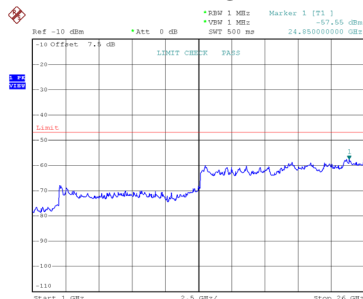

Date: 13.MAY.2026 17:09:25

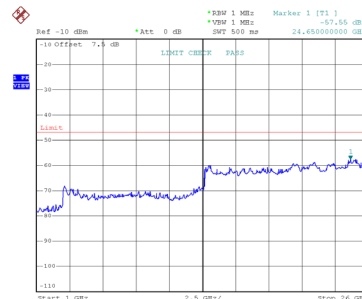

Date: 13.MAY.2026 17:09:37

Test Mode: IEEE 802.11ac(VHT20) - W52

Test Voltage		Normal Voltage			Remarks
Test Frequency (MHz)		5180	5200	5240	Low/Mid/High of test frequency range
Limitation of Collateral Emission of Receiver	MHz	924.34	846.74	342.34	Limit ≤ 4 nW (-54 dBm)
	nW	0.0145	0.0164	0.0162	
	MHz	25000.00	24400.00	25050.00	Limit ≤ 20 nW (-47 dBm)
	nW	1.6596	1.5776	1.7219	


Note:

Emission value = SA measurement value (Include correction factor and cable loss)

Correction factor = 10 log (X)


X = the total number of antennas

CH36

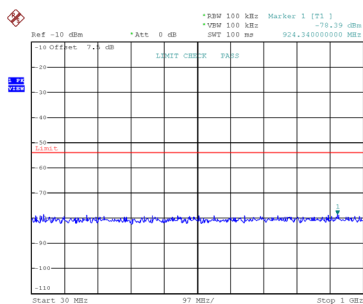


Date: 17.MAR.2026 10:46:30

CH40
f < 1GHz

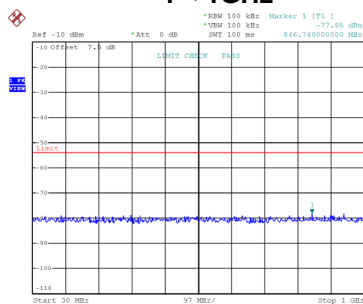


Date: 17.MAR.2026 10:51:29

CH48

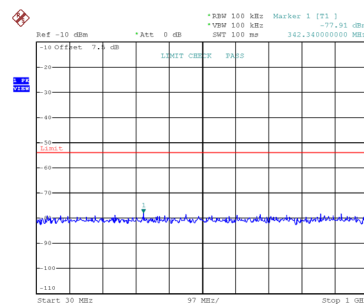


Date: 17.MAR.2026 10:53:01


f ≥ 1GHz

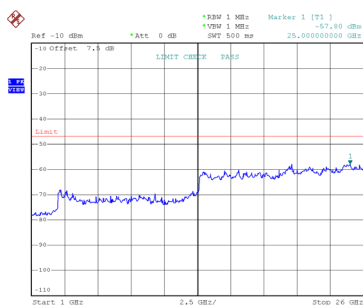

Date: 13.MAY.2026 17:12:57

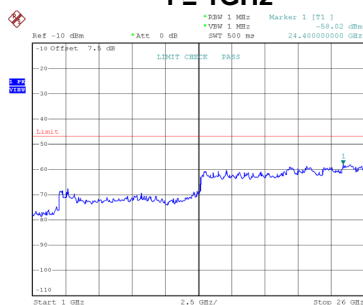

Date: 13.MAY.2026 17:13:08

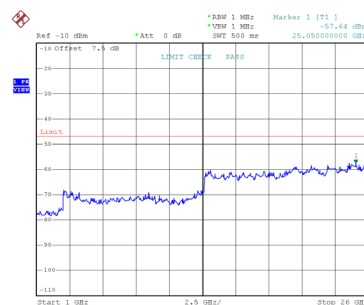

Date: 13.MAY.2026 17:13:26

Test Mode:	IEEE 802.11ac(VHT40) - W52
------------	----------------------------

Test Voltage		Normal Voltage		Remarks
Test Frequency (MHz)		5190	5230	Low/Mid/High of test frequency range
Limitation of Collateral Emission of Receiver	MHz	132.82	396.66	Limit ≤ 4 nW (-54 dBm)
	nW	0.0151	0.0168	
	MHz	24550.00	24900.00	Limit ≤ 20 nW (-47 dBm)
	nW	1.8155	1.9724	


Note:

Emission value = SA measurement value (Include correction factor and cable loss)

Correction factor = $10 \log (X)$


X = the total number of antennas

CH38

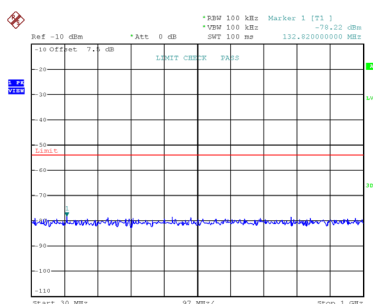


Date: 17.MAR.2026 15:06:37

CH46 f < 1GHz

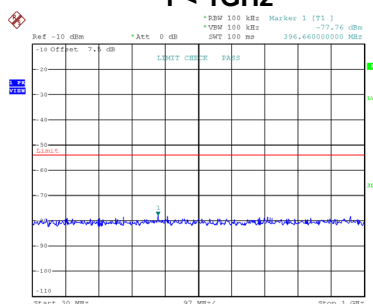


Date: 17.MAR.2026 15:09:38

f ≥ 1GHz

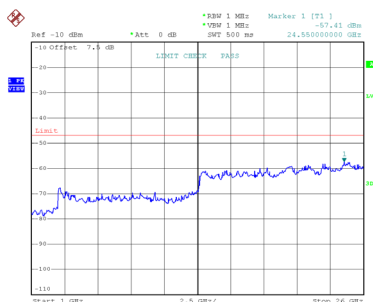

Date: 13.MAY.2026 17:36:39

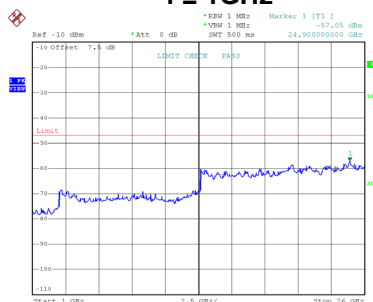

Date: 13.MAY.2026 17:37:49

Test Mode:	IEEE 802.11ac(VHT80) - W52
------------	----------------------------

Test Voltage		Normal Voltage	Remarks
Test Frequency (MHz)		5210	Low/Mid/High of test frequency range
Limitation of Collateral Emission of Receiver	MHz	965.08	Limit ≤ 4 nW (-54 dBm)
	nW	0.0169	
	MHz	22000.00	Limit ≤ 20 nW (-47 dBm)
	nW	1.8365	


Note:

Emission value = SA measurement value (Include correction factor and cable loss)

Correction factor = $10 \log (X)$


X = the total number of antennas

CH42 f < 1GHz

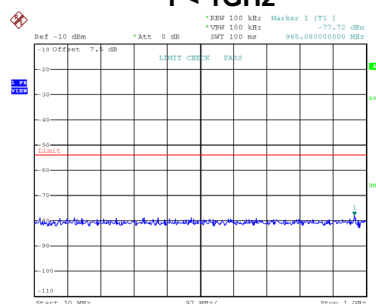

Date: 17.MAR.2026 16:58:11

f $\geq$ 1GHz

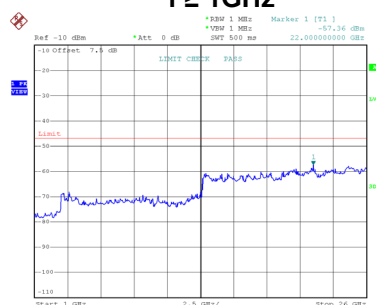

Date: 13.MAY.2026 18:17:04

Test Mode: IEEE 802.11ax(HE20) - W52

Test Voltage		Normal Voltage			Remarks
Test Frequency (MHz)		5180	5200	5240	Low/Mid/High of test frequency range
Limitation of Collateral Emission of Receiver	MHz	338.46	579.02	994.18	Limit ≤ 4 nW (-54 dBm)
	nW	0.0146	0.0143	0.0186	
	MHz	24800.00	24500.00	24900.00	Limit ≤ 20 nW (-47 dBm)
	nW	1.6406	1.7418	1.6032	


Note:

Emission value = SA measurement value (Include correction factor and cable loss)

Correction factor = 10 log (X)


X = the total number of antennas

CH36

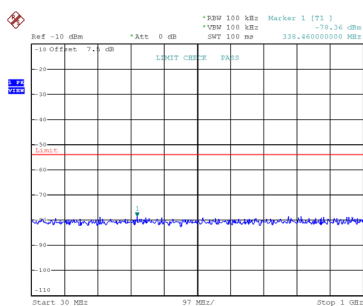


Date: 17.MAR.2026 13:09:35

CH40
f < 1GHz

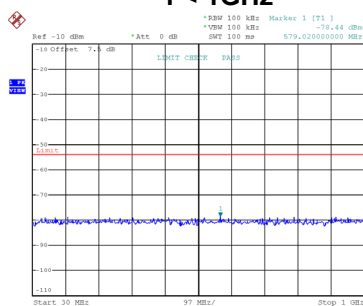


Date: 17.MAR.2026 13:09:55

CH48

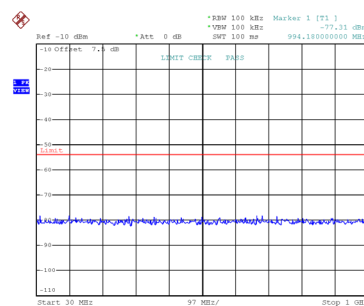


Date: 17.MAR.2026 13:10:15


f ≥ 1GHz

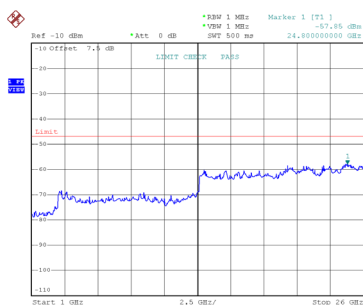

Date: 13.MAY.2026 17:16:30

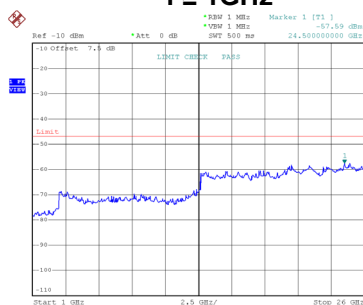

Date: 13.MAY.2026 17:16:42

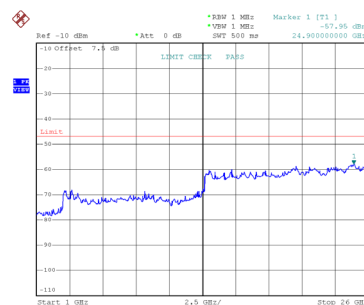

Date: 13.MAY.2026 17:16:53

Test Mode:	IEEE 802.11ax(HE40) - W52
------------	---------------------------

Test Voltage		Normal Voltage		Remarks
Test Frequency (MHz)		5190	5230	Low/Mid/High of test frequency range
Limitation of Collateral Emission of Receiver	MHz	334.58	175.50	Limit ≤ 4 nW (-54 dBm)
	nW	0.0141	0.0171	
	MHz	24800.00	25000.00	Limit ≤ 20 nW (-47 dBm)
	nW	1.7579	1.5560	


Note:

Emission value = SA measurement value (Include correction factor and cable loss)

Correction factor = $10 \log (X)$


X = the total number of antennas

CH38

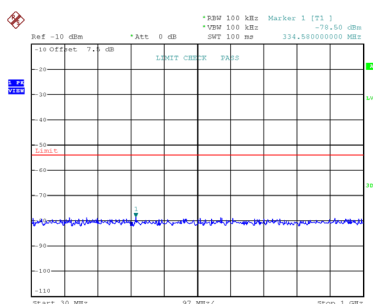


Date: 17.MAR.2026 16:33:16

CH46 f < 1GHz

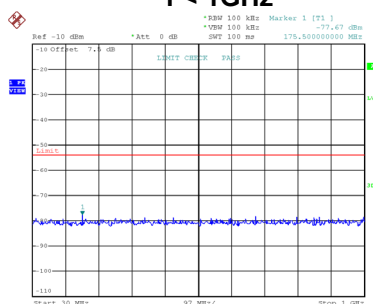


Date: 17.MAR.2026 16:33:38

f ≥ 1GHz

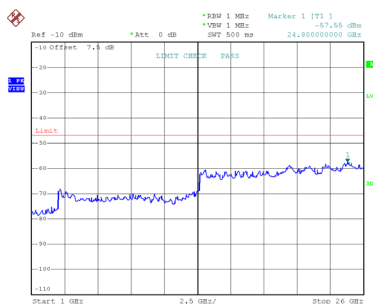

Date: 13.MAY.2026 18:03:45

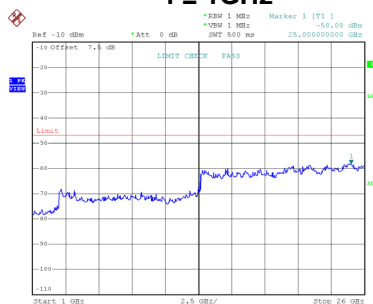

Date: 13.MAY.2026 18:03:59

Test Mode:	IEEE 802.11ax(HE80) - W52
------------	---------------------------


Test Voltage		Normal Voltage	Remarks
Test Frequency (MHz)		5210	Low/Mid/High of test frequency range
Limitation of Collateral Emission of Receiver	MHz	530.52	Limit ≤ 4 nW (-54 dBm)
	nW	0.0175	
	MHz	24850.00	Limit ≤ 20 nW (-47 dBm)
	nW	1.5776	

Note:


Emission value = SA measurement value (Include correction factor and cable loss)

Correction factor = $10 \log (X)$

X = the total number of antennas

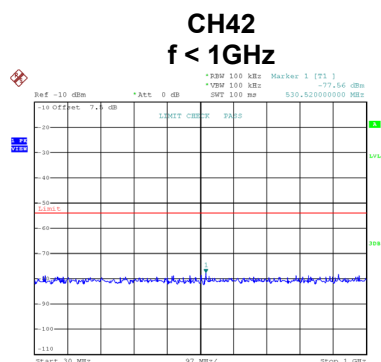

Date: 17.MAR.2026 17:29:08

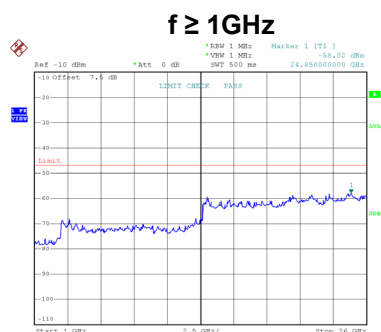

Date: 13.MAY.2026 18:19:24

Test Mode: IEEE 802.11be(EHT20) - W52

Test Voltage		Normal Voltage			Remarks
Test Frequency (MHz)		5180	5200	5240	Low/Mid/High of test frequency range
Limitation of Collateral Emission of Receiver	MHz	821.52	456.80	722.58	Limit ≤ 4 nW (-54 dBm)
	nW	0.0148	0.0145	0.0167	
	MHz	24600.00	24800.00	25800.00	Limit ≤ 20 nW (-47 dBm)
	nW	1.8750	1.5066	1.6406	


Note:

Emission value = SA measurement value (Include correction factor and cable loss)

Correction factor = 10 log (X)


X = the total number of antennas

CH36

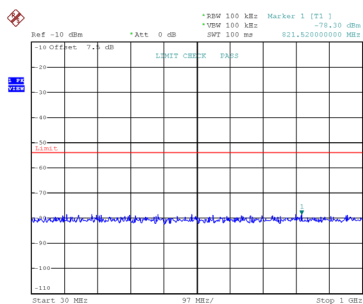


Date: 17.MAR.2026 13:55:33

CH40
f < 1GHz

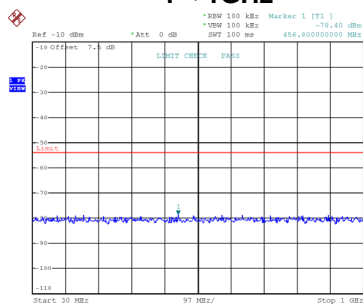


Date: 17.MAR.2026 13:56:23

CH48

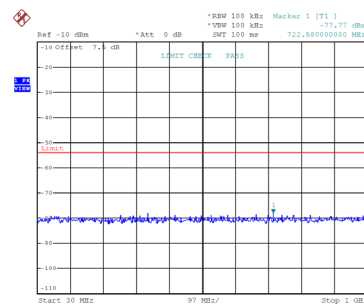


Date: 17.MAR.2026 13:56:54


f ≥ 1GHz

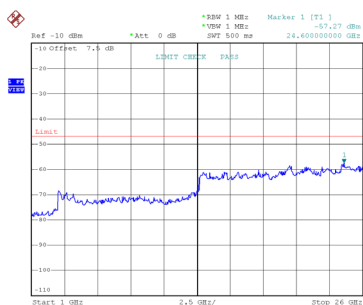

Date: 13.MAY.2026 18:31:01

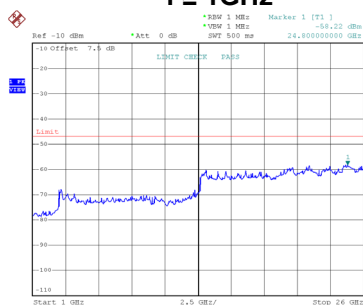

Date: 13.MAY.2026 18:31:50

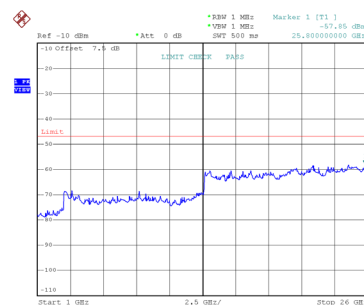

Date: 13.MAY.2026 18:32:22

Test Mode: IEEE 802.11be(EHT40) - W52

Test Voltage		Normal Voltage		Remarks
Test Frequency (MHz)		5190	5230	Low/Mid/High of test frequency range
Limitation of Collateral Emission of Receiver	MHz	827.34	972.84	Limit ≤ 4 nW (-54 dBm)
	nW	0.0157	0.0180	
	MHz	24750.00	24750.00	Limit ≤ 20 nW (-47 dBm)
	nW	1.8113	1.6943	


Note:

Emission value = SA measurement value (Include correction factor and cable loss)

Correction factor = 10 log (X)


X = the total number of antennas

CH38

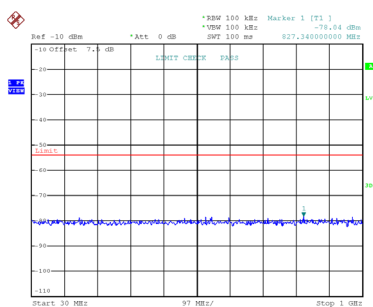


Date: 17.MAR.2026 14:32:39

CH46 f < 1GHz

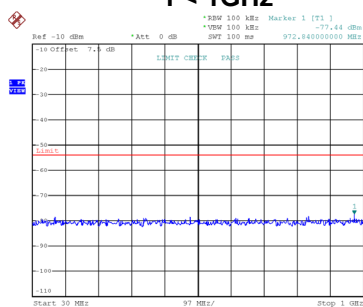


Date: 17.MAR.2026 14:33:04

f ≥ 1GHz

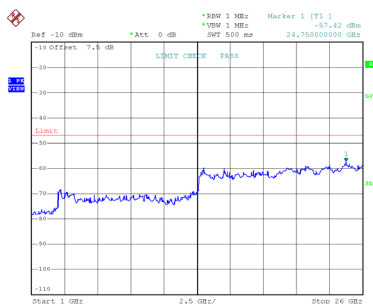

Date: 13.MAY.2026 18:37:34

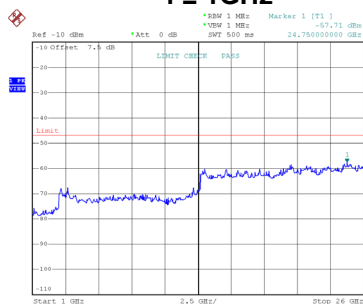


Date: 13.MAY.2026 18:37:46


Test Mode:	IEEE 802.11be(EHT80) - W52
------------	----------------------------

Test Voltage		Normal Voltage	Remarks
Test Frequency (MHz)		5210	Low/Mid/High of test frequency range
Limitation of Collateral Emission of Receiver	MHz	371.44	Limit ≤ 4 nW (-54 dBm)
	nW	0.0162	
	MHz	21900.00	Limit ≤ 20 nW (-47 dBm)
	nW	1.6144	

Note:
Emission value = SA measurement value (Include correction factor and cable loss)
Correction factor = $10 \log(X)$
X = the total number of antennas

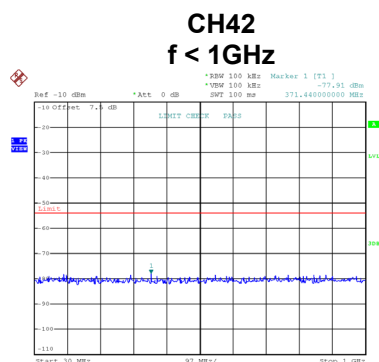

Date: 17.MAR.2026 16:01:07

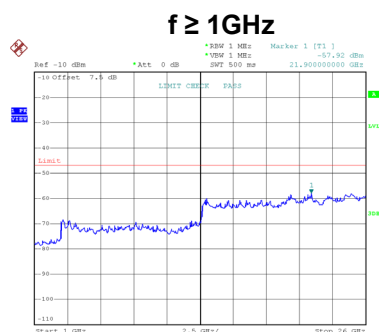

Date: 13.MAY.2026 18:43:21

Test Mode:	IEEE 802.11a - W53
------------	--------------------

Test Voltage		Normal Voltage			Remarks
Test Frequency (MHz)		5260	5300	5320	Low/Mid/High of test frequency range
Limitation of Collateral Emission of Receiver	MHz	505.30	854.50	324.88	Limit ≤ 4 nW (-54 dBm)
	nW	0.0154	0.0163	0.0149	
	MHz	24900.00	24800.00	24900.00	Limit ≤ 20 nW (-47 dBm)
	nW	1.9187	1.7258	1.7660	


Note:

Emission value = SA measurement value (Include correction factor and cable loss)

Correction factor = $10 \log (X)$


X = the total number of antennas

CH52

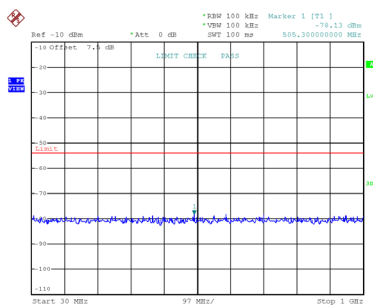


Date: 14.MAR.2026 17:12:05

CH60
f < 1GHz

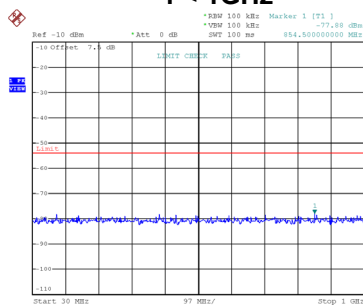


Date: 14.MAR.2026 17:12:31

CH64

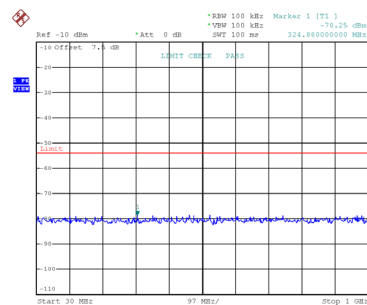


Date: 14.MAR.2026 17:18:49


f ≥ 1GHz

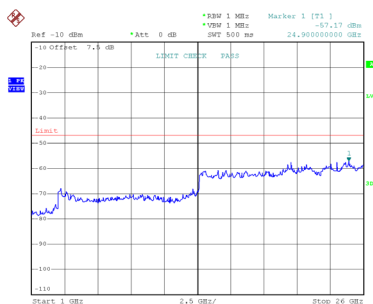

Date: 13.MAY.2026 17:09:50

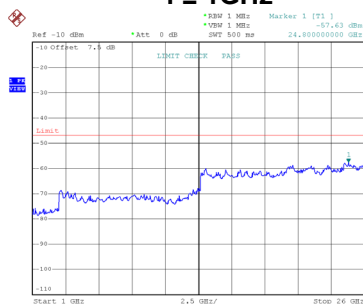

Date: 13.MAY.2026 17:10:01

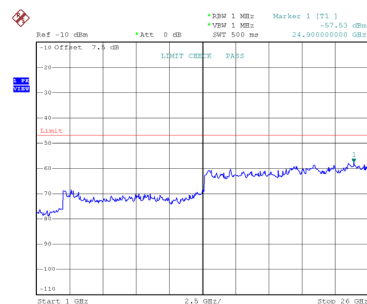

Date: 13.MAY.2026 17:10:12

Test Mode: IEEE 802.11ac(VHT20) - W53

Test Voltage		Normal Voltage			Remarks
Test Frequency (MHz)		5260	5300	5320	Low/Mid/High of test frequency range
Limitation of Collateral Emission of Receiver	MHz	336.52	154.16	431.58	Limit ≤ 4 nW (-54 dBm)
	nW	0.0151	0.0145	0.0193	
	MHz	24550.00	24900.00	24650.00	Limit ≤ 20 nW (-47 dBm)
	nW	1.7865	1.6711	1.7579	


Note:

Emission value = SA measurement value (Include correction factor and cable loss)

Correction factor = 10 log (X)


X = the total number of antennas

CH52

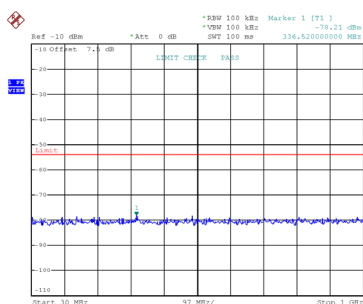


Date: 17.MAR.2026 10:53:21

CH60
f < 1GHz

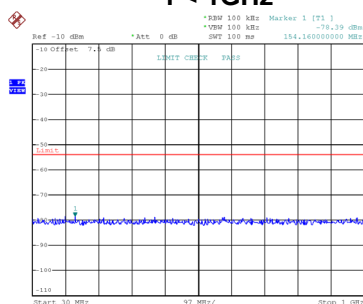


Date: 17.MAR.2026 10:53:43

CH64

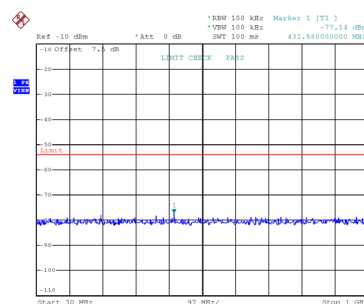


Date: 17.MAR.2026 10:54:04


f ≥ 1GHz

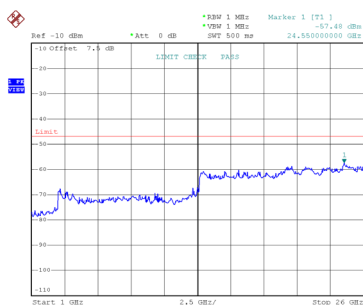

Date: 13.MAY.2026 17:13:56

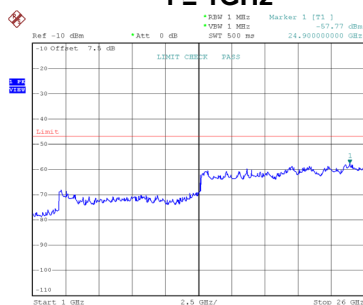

Date: 13.MAY.2026 17:14:08

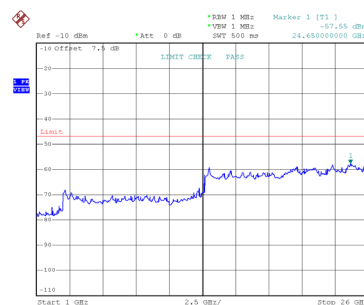

Date: 13.MAY.2026 17:14:19

Test Mode: IEEE 802.11ac(VHT40) - W53

Test Voltage		Normal Voltage		Remarks
Test Frequency (MHz)		5270	5310	Low/Mid/High of test frequency range
Limitation of Collateral Emission of Receiver	MHz	495.60	489.78	Limit ≤ 4 nW (-54 dBm)
	nW	0.0139	0.0156	
	MHz	25100.00	25000.00	Limit ≤ 20 nW (-47 dBm)
	nW	1.7179	1.8880	


Note:

Emission value = SA measurement value (Include correction factor and cable loss)


Correction factor = $10 \log (X)$

X = the total number of antennas



CH54

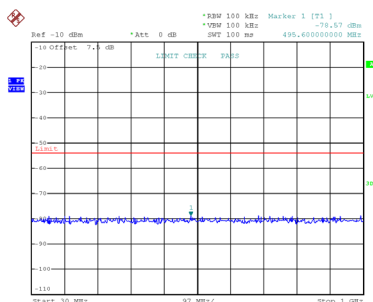

CH62 f < 1GHz

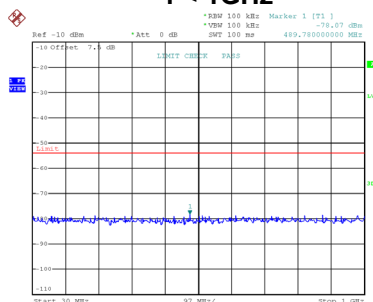

f ≥ 1GHz

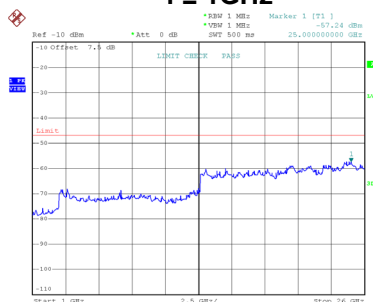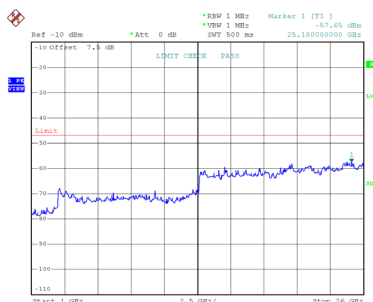

Test Mode:	IEEE 802.11ac(VHT80) - W53
------------	----------------------------

Test Voltage		Normal Voltage	Remarks
Test Frequency (MHz)		5290	Low/Mid/High of test frequency range
Limitation of Collateral Emission of Receiver	MHz	317.12	Limit ≤ 4 nW (-54 dBm)
	nW	0.0158	
	MHz	24600.00	Limit ≤ 20 nW (-47 dBm)
	nW	1.6482	


Note:

Emission value = SA measurement value (Include correction factor and cable loss)

Correction factor = $10 \log (X)$

X = the total number of antennas

CH58 f < 1GHz

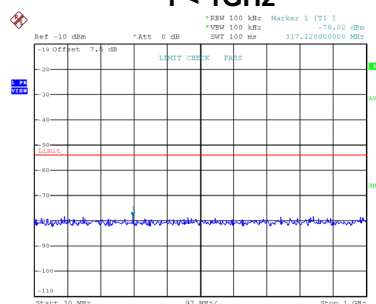

Date: 17.MAR.2026 16:59:42

f ≥ 1GHz



Date: 13.MAY.2026 18:17:22

Test Mode: IEEE 802.11ax(HE20) - W53

Test Voltage		Normal Voltage			Remarks
Test Frequency (MHz)		5260	5300	5320	Low/Mid/High of test frequency range
Limitation of Collateral Emission of Receiver	MHz	445.16	881.66	879.72	Limit ≤ 4 nW (-54 dBm)
	nW	0.0138	0.0167	0.0163	
	MHz	24900.00	24900.00	24900.00	Limit ≤ 20 nW (-47 dBm)
	nW	1.7418	1.9143	1.7378	


Note:

Emission value = SA measurement value (Include correction factor and cable loss)

Correction factor = 10 log (X)


X = the total number of antennas

CH52

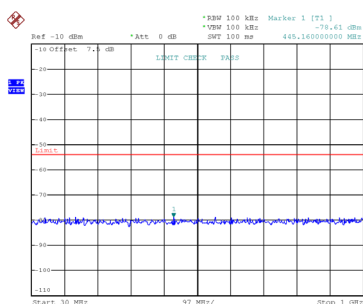


Date: 17.MAR.2026 13:10:36

CH60
f < 1GHz

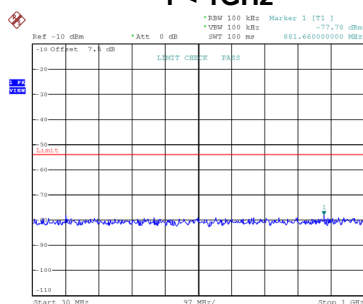


Date: 17.MAR.2026 13:10:56

CH64

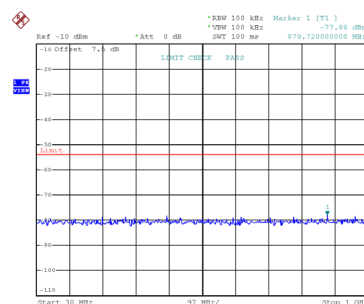


Date: 17.MAR.2026 13:11:16


f ≥ 1GHz

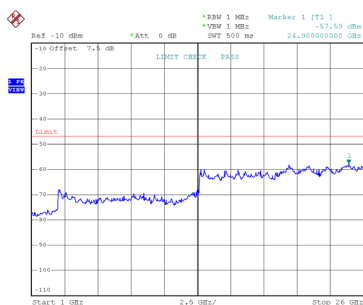

Date: 13.MAY.2026 17:17:05

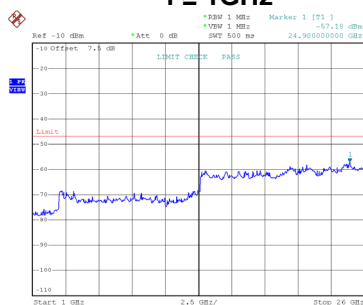

Date: 13.MAY.2026 17:17:23

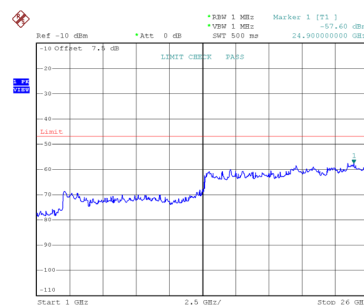

Date: 13.MAY.2026 17:17:34

Test Mode: IEEE 802.11ax(HE40) - W53

Test Voltage		Normal Voltage		Remarks
Test Frequency (MHz)		5270	5310	Low/Mid/High of test frequency range
Limitation of Collateral Emission of Receiver	MHz	159.98	194.90	Limit ≤ 4 nW (-54 dBm)
	nW	0.0183	0.0166	
	MHz	24650.00	24600.00	Limit ≤ 20 nW (-47 dBm)
	nW	1.7660	1.9364	


Note:

Emission value = SA measurement value (Include correction factor and cable loss)

Correction factor = $10 \log (X)$


X = the total number of antennas

CH54

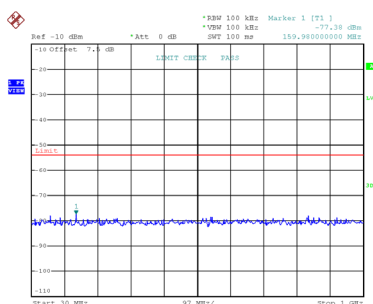


Date: 17.MAR.2026 16:34:43

CH62
f < 1GHz

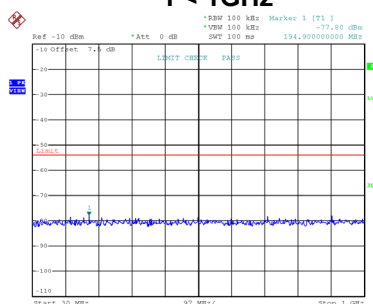


Date: 17.MAR.2026 16:35:17

f $\geq$ 1GHz

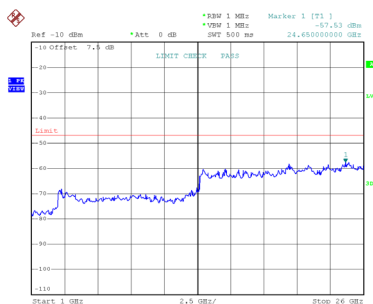

Date: 13.MAY.2026 18:04:12

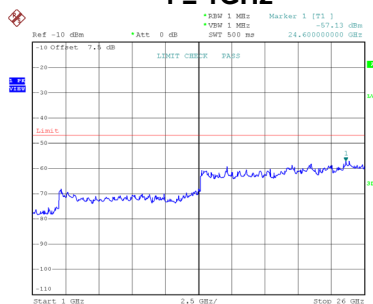

Date: 13.MAY.2026 18:04:34

Test Mode:	IEEE 802.11ax(HE80) - W53
------------	---------------------------


Test Voltage		Normal Voltage	Remarks
Test Frequency (MHz)		5290	Low/Mid/High of test frequency range
Limitation of Collateral Emission of Receiver	MHz	406.36	Limit ≤ 4 nW (-54 dBm)
	nW	0.0173	
	MHz	24650.00	Limit ≤ 20 nW (-47 dBm)
	nW	1.6982	

Note:


Emission value = SA measurement value (Include correction factor and cable loss)

Correction factor = $10 \log (X)$

X = the total number of antennas

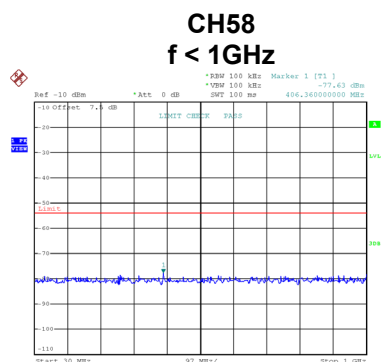

Date: 17.MAR.2026 17:30:23

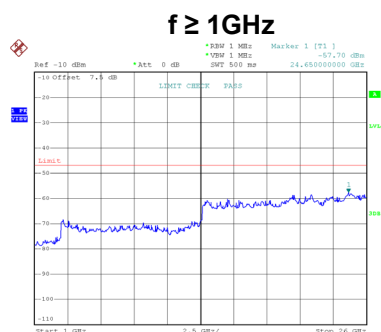

Date: 13.MAY.2026 18:19:37

Test Mode: IEEE 802.11be(EHT20) - W53

Test Voltage		Normal Voltage			Remarks
Test Frequency (MHz)		5260	5300	5320	Low/Mid/High of test frequency range
Limitation of Collateral Emission of Receiver	MHz	361.74	786.60	858.38	Limit ≤ 4 nW (-54 dBm)
	nW	0.0155	0.0186	0.0159	
	MHz	25050.00	24800.00	20400.00	Limit ≤ 20 nW (-47 dBm)
	nW	1.5996	1.7219	1.4723	


Note:

Emission value = SA measurement value (Include correction factor and cable loss)

Correction factor = 10 log (X)


X = the total number of antennas

CH52

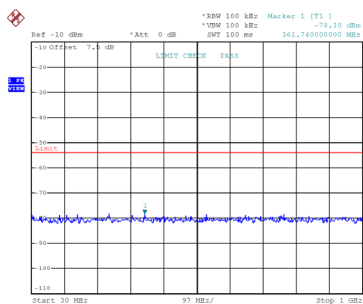


Date: 17.MAR.2026 13:57:17

CH60
f < 1GHz

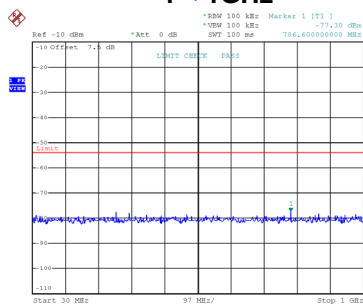


Date: 17.MAR.2026 13:57:40

CH64

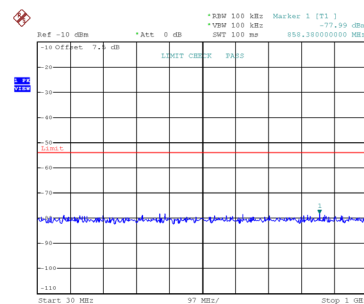


Date: 17.MAR.2026 13:58:02


f ≥ 1GHz

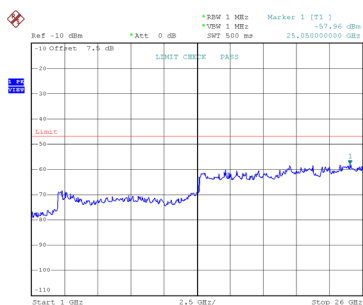

Date: 13.MAY.2026 18:32:43

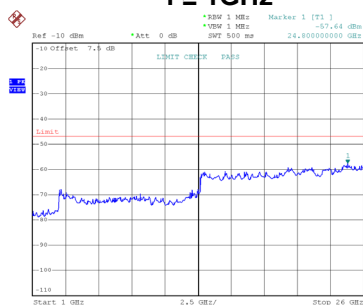

Date: 13.MAY.2026 18:32:57

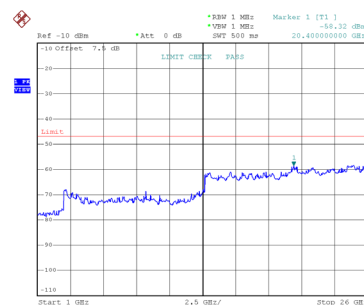

Date: 13.MAY.2026 18:33:20

Test Mode:	IEEE 802.11be(EHT40) - W53
------------	----------------------------

Test Voltage		Normal Voltage		Remarks
Test Frequency (MHz)		5270	5310	Low/Mid/High of test frequency range
Limitation of Collateral Emission of Receiver	MHz	796.30	916.58	Limit ≤ 4 nW (-54 dBm)
	nW	0.0164	0.0171	
	MHz	24800.00	24950.00	Limit ≤ 20 nW (-47 dBm)
	nW	1.6711	1.6672	


Note:

Emission value = SA measurement value (Include correction factor and cable loss)

Correction factor = $10 \log (X)$


X = the total number of antennas

CH54

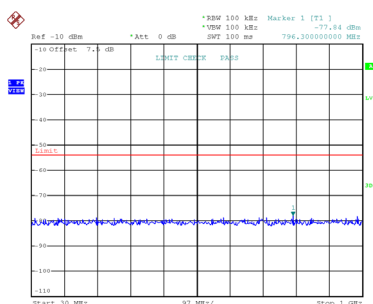


Date: 17.MAR.2026 14:33:31

CH62 f < 1GHz

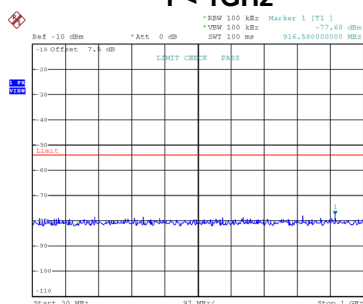


Date: 17.MAR.2026 14:33:53

f ≥ 1GHz

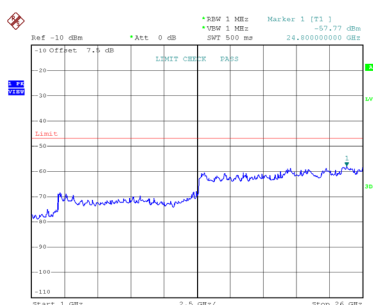

Date: 13.MAY.2026 18:38:18

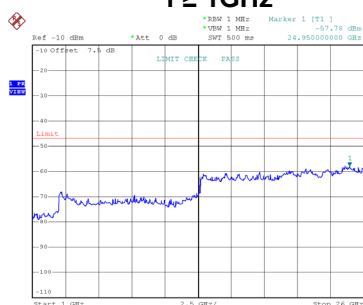

Date: 13.MAY.2026 18:38:35

Test Mode:	IEEE 802.11be(EHT80) - W53
------------	----------------------------


Test Voltage		Normal Voltage	Remarks
Test Frequency (MHz)		5290	Low/Mid/High of test frequency range
Limitation of Collateral Emission of Receiver	MHz	551.86	Limit ≤ 4 nW (-54 dBm)
	nW	0.0163	
	MHz	24900.00	Limit ≤ 20 nW (-47 dBm)
	nW	1.7742	

Note:


Emission value = SA measurement value (Include correction factor and cable loss)

Correction factor = $10 \log (X)$

X = the total number of antennas

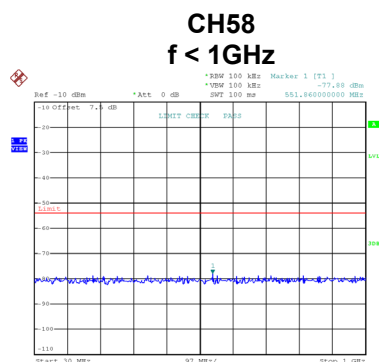

Date: 17.MAR.2026 16:08:36

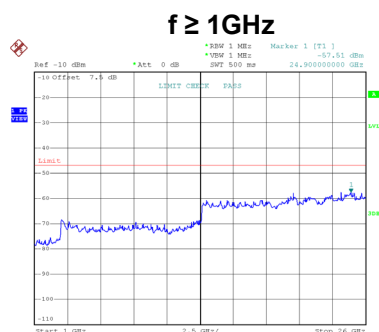

Date: 13.MAY.2026 18:43:32

Test Mode:	IEEE 802.11ac(VHT160) - W52+W53
------------	---------------------------------


Test Voltage		Normal Voltage	Remarks
Test Frequency (MHz)		5250	Low/Mid/High of test frequency range
Limitation of Collateral Emission of Receiver	MHz	668.26	Limit ≤ 4 nW (-54 dBm)
	nW	0.0152	
	MHz	24850.00	Limit ≤ 20 nW (-47 dBm)
	nW	1.7418	

Note:


Emission value = SA measurement value (Include correction factor and cable loss)

Correction factor = $10 \log (X)$

X = the total number of antennas

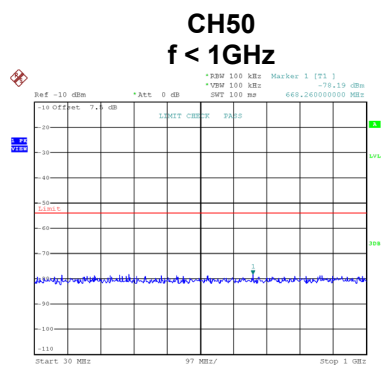

Date: 17.MAR.2026 18:41:38

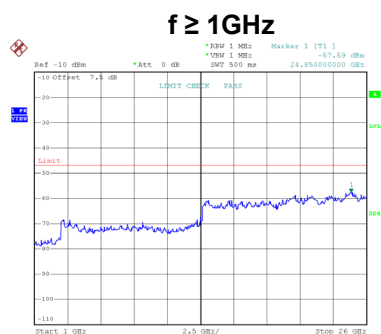

Date: 13.MAY.2026 18:55:20

Test Mode:	IEEE 802.11ax(HE160) - W52+W53
------------	--------------------------------


Test Voltage		Normal Voltage	Remarks
Test Frequency (MHz)		5250	Low/Mid/High of test frequency range
Limitation of Collateral Emission of Receiver	MHz	650.80	Limit ≤ 4 nW (-54 dBm)
	nW	0.0167	
	MHz	24800.00	Limit ≤ 20 nW (-47 dBm)
	nW	1.6293	

Note:


Emission value = SA measurement value (Include correction factor and cable loss)

Correction factor = $10 \log (X)$

X = the total number of antennas

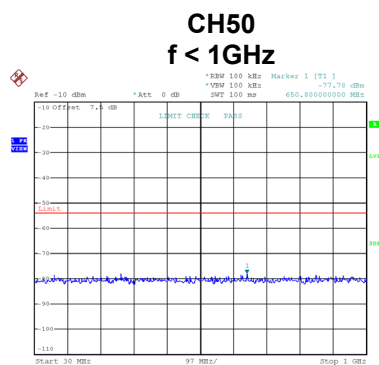

Date: 17.MAR.2026 19:13:57

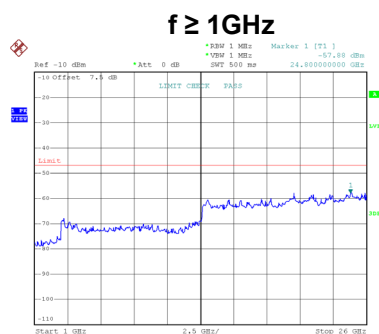

Date: 13.MAY.2026 18:58:05

Test Mode:	IEEE 802.11be(EHT160) - W52+W53
------------	---------------------------------


Test Voltage		Normal Voltage	Remarks
Test Frequency (MHz)		5250	Low/Mid/High of test frequency range
Limitation of Collateral Emission of Receiver	MHz	161.92	Limit ≤ 4 nW (-54 dBm)
	nW	0.0167	
	MHz	25000.00	Limit ≤ 20 nW (-47 dBm)
	nW	1.6520	

Note:


Emission value = SA measurement value (Include correction factor and cable loss)

Correction factor = $10 \log (X)$

X = the total number of antennas

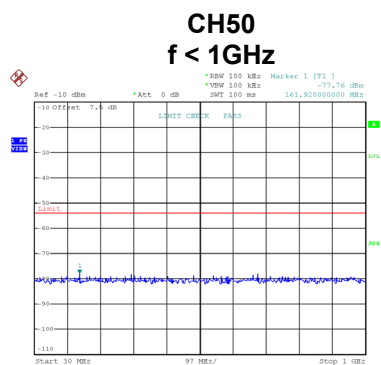

Date: 17.MAR.2026 16:30:25

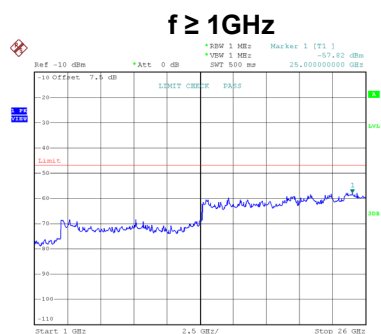

Date: 13.MAY.2026 18:49:30

Test Mode: IEEE 802.11a - W56

Test Voltage		Normal Voltage			Remarks
Test Frequency (MHz)		5500	5600	5720	Low/Mid/High of test frequency range
Limitation of Collateral Emission of Receiver	MHz	353.98	707.06	743.92	Limit ≤ 4 nW (-54 dBm)
	nW	0.0152	0.0179	0.0155	
	MHz	24900.00	24750.00	24800.00	Limit ≤ 20 nW (-47 dBm)
	nW	1.7061	1.9679	1.5849	


Note:

Emission value = SA measurement value (Include correction factor and cable loss)

Correction factor = $10 \log (X)$


X = the total number of antennas

CH100

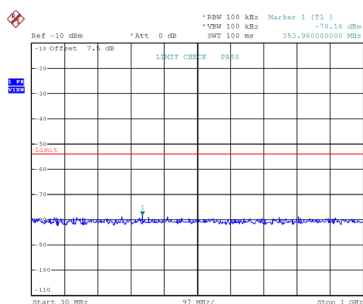


Date: 14.MAR.2026 17:16:25

CH120
f < 1GHz

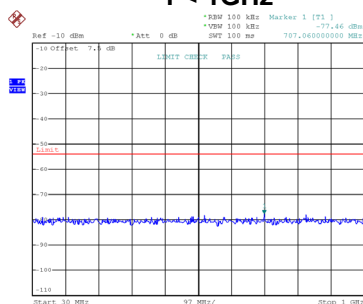


Date: 14.MAR.2026 17:16:47

CH144

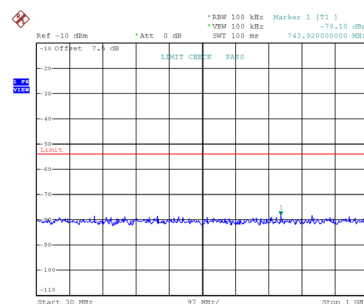


Date: 14.MAR.2026 17:19:03


f ≥ 1GHz

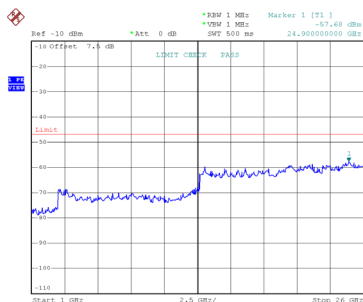

Date: 13.MAY.2026 17:10:25

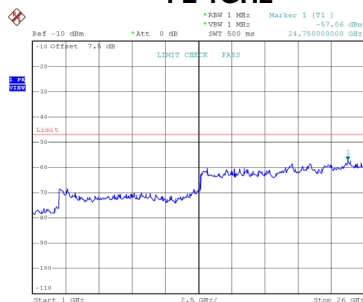

Date: 13.MAY.2026 17:10:38

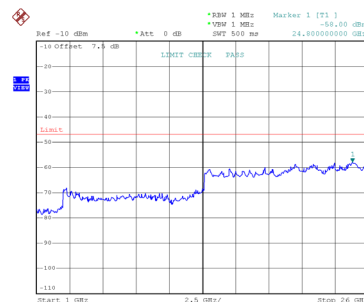

Date: 13.MAY.2026 17:10:49

Test Mode: IEEE 802.11ac(VHT20) - W56

Test Voltage		Normal Voltage			Remarks
Test Frequency (MHz)		5500	5600	5720	Low/Mid/High of test frequency range
Limitation of Collateral Emission of Receiver	MHz	489.78	266.68	307.42	Limit ≤ 4 nW (-54 dBm)
	nW	0.0161	0.0159	0.0154	
	MHz	24600.00	24850.00	24550.00	Limit ≤ 20 nW (-47 dBm)
	nW	1.8923	1.7338	1.7742	


Note:

Emission value = SA measurement value (Include correction factor and cable loss)

Correction factor = $10 \log (X)$


X = the total number of antennas

CH100

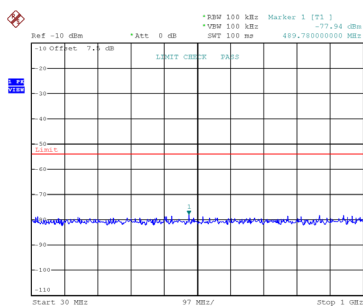


Date: 17.MAR.2026 10:54:40

CH120 f < 1GHz

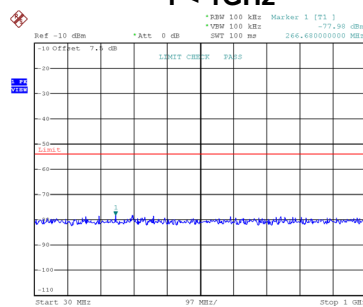


Date: 17.MAR.2026 10:56:28

CH144

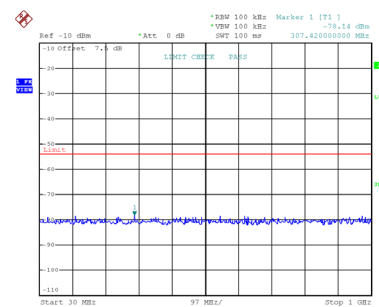


Date: 17.MAR.2026 10:57:19


f ≥ 1GHz

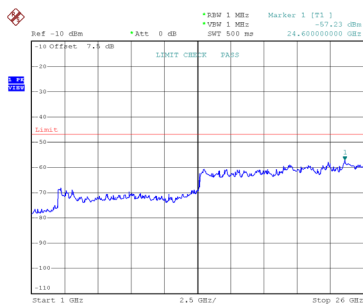

Date: 13.MAY.2026 17:14:50

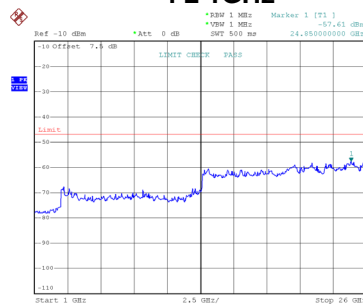

Date: 13.MAY.2026 17:15:02

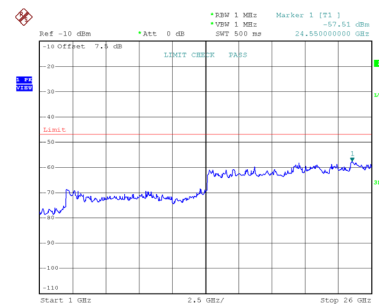

Date: 13.MAY.2026 17:15:31

Test Mode: IEEE 802.11ac(VHT40) - W56

Test Voltage		Normal Voltage			Remarks
Test Frequency (MHz)		5510	5590	5710	Low/Mid/High of test frequency range
Limitation of Collateral Emission of Receiver	MHz	926.28	260.86	612.00	Limit ≤ 4 nW (-54 dBm)
	nW	0.0155	0.0165	0.0154	
	MHz	24900.00	24750.00	24950.00	Limit ≤ 20 nW (-47 dBm)
	nW	1.8408	1.5488	1.7783	


Note:

Emission value = SA measurement value (Include correction factor and cable loss)

Correction factor = $10 \log(X)$


X = the total number of antennas

CH102

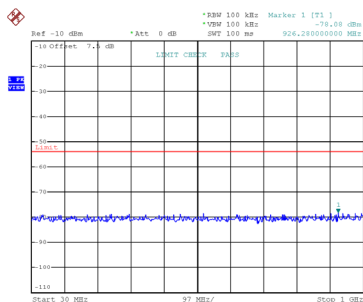


Date: 17.MAR.2026 15:11:14

CH118
f < 1GHz

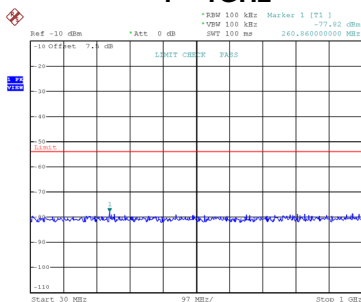


Date: 17.MAR.2026 15:11:36

CH142

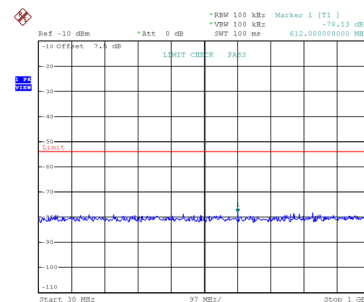


Date: 17.MAR.2026 15:11:59


f ≥ 1GHz

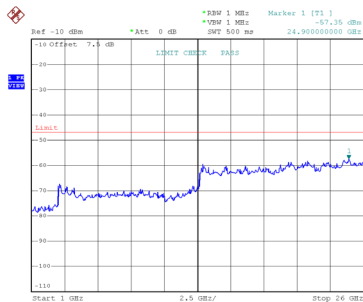

Date: 13.MAY.2026 17:46:25

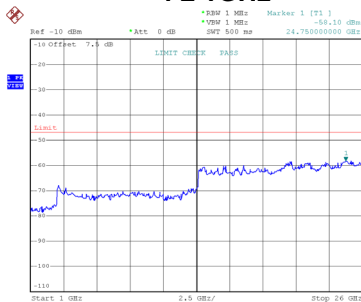

Date: 13.MAY.2026 17:54:25

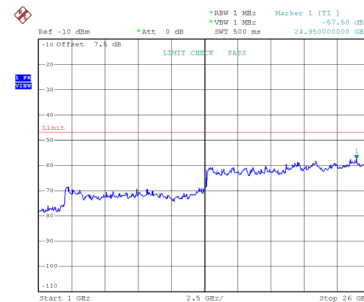

Date: 13.MAY.2026 18:00:03