

**Radio equipment according to Certification
Ordinance Article 2 Section 1 No.19
According to MIC Notice No. 88 Appendix 43
for
TPMS - VALVE ASSY; BLE
Model No.: BSI-1505**

of

Applicant: Rivian Automotive, LLC
Address: 14600 Myford Road, Irvine, CA 92606, USA

Tested and Prepared

By

Worldwide Testing Services (Taiwan) Co., Ltd.

Report No.: W6M22505-24385-J-1

6F, NO. 58, LANE 188, RUEY-KUANG RD., NEIHU TAIPEI 114, TAIWAN, R.O.C.
TEL: 886-2-66068877 FAX: 886-2-66068879 E-mail: wts@wts-lab.com





TABLE OF CONTENTS

1	General Information	2
1.1	Notes	2
1.2	Testing laboratory	4
1.2.1	Location	4
1.2.2	Details of accreditation status	4
1.3	Details of applicant	4
1.4	Application details	4
1.5	Equipment information	4
1.6	Assembly	5
1.7	Test method	5
2	Technical Test	6
2.1	Summary of test results	6
2.2	Test environment	6
2.3	Test setup	6
2.4	Test equipment utilized	7
3	Test results (enclosure)	8
3.1	Antenna specifications	9
3.2	Frequency Tolerance	10
3.3	Occupied Bandwidth (99% channel power bandwidth)	11
3.4	Spreading Bandwidth	17
3.5	Spurious emissions (conducted)_ transmitter	18
3.6	Antenna Power	55
3.7	E.I.R.P.	56
3.8	Spurious emission receiver	57
3.9	Interference Prevention Function	76



1 General Information

1.1 Notes

The purpose of conformity testing is to increase the probability of adherence to the essential requirements or conformity specifications, as appropriate.

The complexity of the technical specifications, however, means that full and thorough testing is impractical for both technical and economic reasons.


Furthermore, there is no guarantee that a test sample, which has passed all the relevant tests conforms to a specification.

Neither is there any guarantee that such a test sample will interwork with other genuinely open systems.

The existence of the tests nevertheless provides the confidence that the test sample possesses the qualities as maintained and that its performance generally conforms to representative cases of communications equipment.

Laboratory disclaimer-

1. The test results of this test report relate exclusively to the item tested as specified in 1.5.
2. The test report may only be reproduced or published in full.
3. Reproduction or publication of extracts from the report requires the prior written approval of the Worldwide Testing Services (Taiwan) Co., Ltd.
4. Antenna gain is provided by applicant and laboratory issue relevant data and results.



Worldwide Testing Services(Taiwan) Co., Ltd.

Tester:

October 15, 2025

Sora Kuo

Sora

Date

WTS-Lab.

Name

Signature

Technical responsibility for area of testing:

October 15, 2025

Kevin Wang


Kevin Wang

Date

WTS

Name

Signature



Worldwide Testing Services(Taiwan) Co., Ltd.

1.2 Testing laboratory

1.2.1 Location

10m OATS

No.5-1, Lishui, Shuang Sing Village, Wanli Dist.,
New Taipei City 207, Taiwan (R.O.C.)

3 meter semi-anechoic chamber

No. 99, Sec. 1, Balian Rd., Xizhi Dist.,
New Taipei City 221032, Taiwan (R.O.C.)

Worldwide Testing Services (Taiwan) Co., Ltd.
6F., No. 58, Ln. 188, Ruiguang Rd., Neihu Dist.,
Taipei City 114, Taiwan (R.O.C.)
Tel: 886-2-6606-8877

1.2.2 Details of accreditation status

Accredited testing laboratory

Telefication Reviewed Laboratory: TRL 0501

1.3 Details of applicant


Name	: Rivian Automotive, LLC
Street	: 14600 Myford Road,
Town	: Irvine, CA 92606,
Country	: USA

1.4 Application details

Date of receipt of test item	: September 23, 2025
Date of test	: from September 24, 2025 to October 08, 2025

1.5 Equipment information

Description of test item	: TPMS - VALVE ASSY; BLE
Type identification	: BSI-1505
Multi-listing model no.	: ./.
Trade mark	: RIVIAN
Modulation type	: GFSK



Worldwide Testing Services(Taiwan) Co., Ltd.

Frequency range : 2.4000 GHz - 2.4835 GHz

Tested frequencies : 2.402 – 2.480 GHz

Frequency of the used channel : Bluetooth low energy mode
Frequency (ch 0) : 2.402 GHz
Frequency (ch 19) : 2.440 GHz
Frequency (ch 39) : 2.480 GHz

Type of antenna : Monopole antenna

Antenna gain : -2.86508 dBi

Rated output power : 10 mW

Sample no. : #17

Manufacturer: (if different from applicant)


Name : Sysgration Ltd.
Street : 6F, No.1, Sec.1, Tiding Blvd., Neihu Dist.
Town : Taipei City 114
Country : Taiwan

1.6 Assembly

Tenon will be used to seal the case for preventing access RF part directly with glue. For this EUT is opening only by destroying the equipment have been taken to satisfy sample requirement.

1.7 Test method

According to MIC Notice No. 88 Appendix 43.



2 Technical Test

2.1 Summary of test results


No deviations from the technical specifications were ascertained in the course of the test performed.

2.2 Test environment


Temperature	: 5 ° C - 35 ° C
Relative humidity content	: 45% - 85%
Air pressure	: 990 - 1300 hPa
Details of power supply	: Battery 3Vd.c. (CR2450HR)
Other parameter	: ./.
Extreme conditions parameters	: Vnom: 3 V Vmin: 2.7 V Vmax: 3.3 V

2.3 Test setup

Antenna power

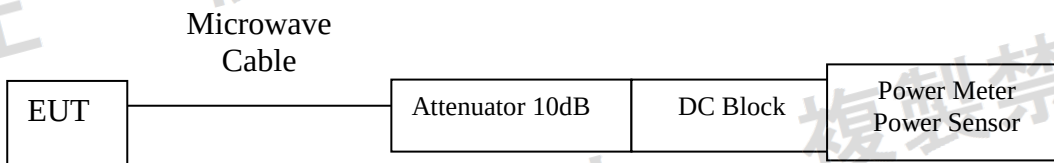


Frequency tolerance, Occupied bandwidth, Spreading bandwidth and Spurious emission

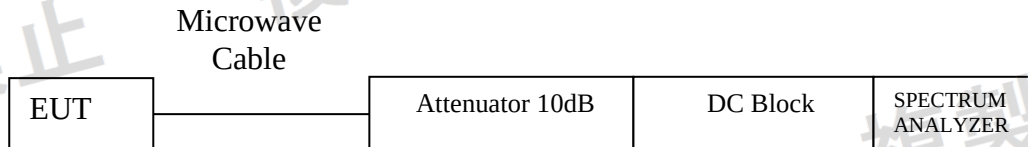

Test item Name	Measurement Uncertainty
Estimation Result of Uncertainty of Frequency Drift Measurement	Expanded Uncertainty : 6.11 Hz
Estimation Result of Uncertainty of Bandwidth Measurement	Expanded Uncertainty : 0.37 kHz
Estimation Result of Uncertainty of Conducted Output Power Measurement	Expanded Uncertainty : 1.63 dB

The decision rule is: Measurement uncertainty is not included in the calculation of test results.



Worldwide Testing Services(Taiwan) Co., Ltd.

2.4 Test equipment utilized

Frequency Tolerance & OCCUPIED BANDWIDTH & SPREADING BANDWIDTH
& EIRP POWER

Code No.	Test equipment	Mode No.	Serial No.	Brand	Cal. Date	Next Cal. Date	Calibration Body	Calibration Method
ETSTW-RE 050	Attenuator 10dB	50HF-010-1	None	JFW	2025/2/14	2026/2/13	WTS	C
ETSTW-RE 055	SPECTRUM ANALYZER	FSU 26	200074	R&S	2025/3/5	2026/3/4	ITRI	C
ETSTW-RE 099	DC Block	50DB-007-1	None	JFW	2025/2/14	2026/2/13	WTS	C
ETSTW-Cable 030	Microwave Cable	SUCOFLEX 104 (S_Cable 9)	279067	HUBER+SUHNER	2025/2/14	2026/2/13	WTS	C

Conducted Spurious Emission

Code No.	Test equipment	Mode No.	Serial No.	Brand	Cal. Date	Next Cal. Date	Calibration Body	Calibration Method
ETSTW-RE 050	Attenuator 10dB	50HF-010-1	None	JFW	2025/2/14	2026/2/13	WTS	C
ETSTW-RE 133	EXA Signal Analyzer	N9010A	MY53470566	Agilent	2025/5/8	2026/5/7	ITRI	C
ETSTW-RE 099	DC Block	50DB-007-1	None	JFW	2025/2/14	2026/2/13	WTS	C
ETSTW-Cable 030	Microwave Cable	SUCOFLEX 104 (S_Cable 9)	279067	HUBER+SUHNER	2025/2/14	2026/2/13	WTS	C

Calibration Method:

- Calibration conducted by the National Institute of Information and Communications Technology (NICT) (hereinafter referred to as "NICT") or a designated calibration agency under Article 102-18 paragraph (1)
- Correction conducted pursuant to the provisions of Article 135 or Article 144 of the Measurement Law (Law No. 51 of 1992)
- Calibration conducted in foreign countries, which shall be equivalent to the calibration conducted by the NICT or a designated calibration agency under Article 102-18 paragraph (1)
- Calibration conducted by using measuring instruments and other equipment listed in the right column of Table No. 3 attached hereto, which shall have been given any of calibration, etc. listed above from a) to c)



Worldwide Testing Services(Taiwan) Co., Ltd.

3 Test results (enclosure)


☒ 1st test

☐ test after modification

☐ production test


Test case	Subclause	Required	Status
<i>General provisions</i>			
Frequency tolerance	5	☒	C
Occupied bandwidth	6	☒	C
Spurious emissions	7	☒	C
<i>Transmitting equipment</i>			
Antenna power	14	☒	C
SAR	14.2	☐	NA
Frequency stabilization	15	☒	C
<i>Transmitter antenna</i>			
Type, configuration, etc. of transmitting antenna	20	☒	C
Directional pattern of transmitting antenna	22	☒	C
<i>Receiving equipment</i>			
Spurious emission of receiver	24	☒	C
Refer to all articles for transmitter antenna	26	☒	C
<i>Operating frequency 2402-2480MHz</i>			
High Frequency/modulation section cannot be opened easily	49.20(1); a	☒	C
Communication method	49.20(1); b	☒	C
Modulation method	49.20(1); c	☒	C
Spread spectrum method	49.20(1); d	☐	NA
Antenna power	49.20(1); e	☒	C
Absolute gain of transmitting antenna	49.20(1); f(1)	☒	C
E.I.R.P.	49.20(1); f(2)	☐	NA
Number of carriers within 1 MHz bandwidth in OFDM	49.20(1); g	☐	NA
Diffusion bandwidth	49.20(1); h	☒	C
Spreading factor	49.20(1); i	☐	NA
Frequency retention time (FH employed)	49.20(1); j	☐	NA
Carrier sense (Only Air craft equipment unless FHSS)	./.	☐	NA
Interference Prevention Function	9-4. 8	☒	C
Note 1: C = Conform NC = Not Conform NT = Not Tested NA = Not Applicable			

3.1 Antenna specifications

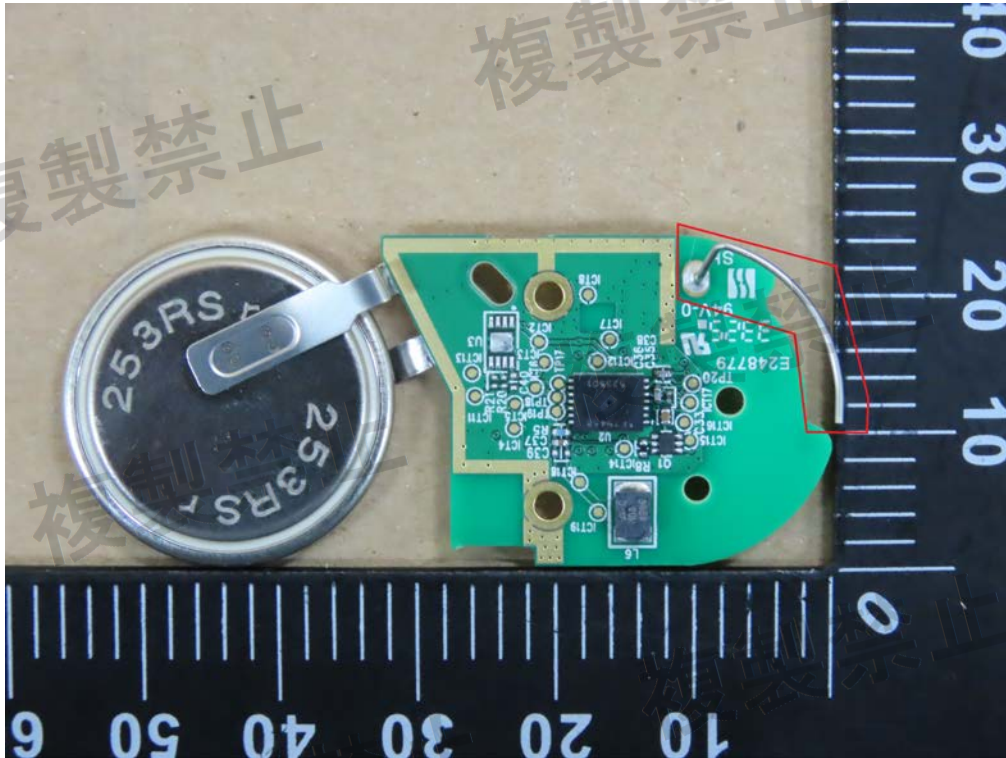

Antenna Type: Monopole antenna

Antenna gain: -2.86508 dBi



Worldwide Testing Services(Taiwan) Co., Ltd.

3.2 Frequency Tolerance

Test date: October 04, 2025

Temperature: 24.1 °C

Humidity: 56.0 %


Tester: Sora

Tolerance from nominal frequency:

Mode	Channel	Frequency Tolerance (kHz)			MAX Frequency Tolerance (ppm)	Limit (ppm)
		Vmin	Vnor	Vmax		
BLE 1M	Ch 0 : 2402 MHz	-8.814	-8.734	-8.734	3.7	50
	Ch 19 : 2440 MHz	-8.173	-8.173	-8.093	3.3	
	Ch 39 : 2480 MHz	-8.654	-8.494	-8.494	3.5	

Limits:

Under all test conditions	< 50 ppm
---------------------------	----------



Worldwide Testing Services(Taiwan) Co., Ltd.

3.3 Occupied Bandwidth (99% channel power bandwidth)


Test date: October 04, 2025

Temperature: 24.1 °C


Humidity: 56.0 %

Tester: Sora


Occupied Bandwidth		
Volt	Freq	measure value(MHz)
3V	CH 0	1.362179487
	2402MHz	
	CH 19	1.370192308
	2440MHz	
	CH 39	1.362179487
	2480MHz	
2.7V	CH 0	1.362179487
	2402MHz	
	CH 19	1.370192308
	2440MHz	
	CH 39	1.362179487
	2480MHz	
3.3V	CH 0	1.362179487
	2402MHz	
	CH 19	1.370192308
	2440MHz	
	CH 39	1.362179487
	2480MHz	




Worldwide Testing Services(Taiwan) Co., Ltd.

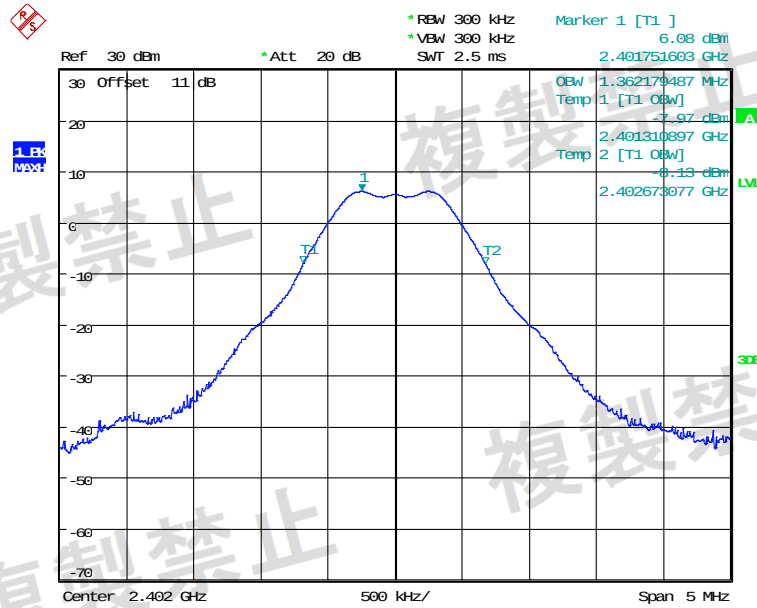


OCCUPIED BANDWIDTH BLE 1M CH00 3V
Date: 4.OCT.2025 16:59:46

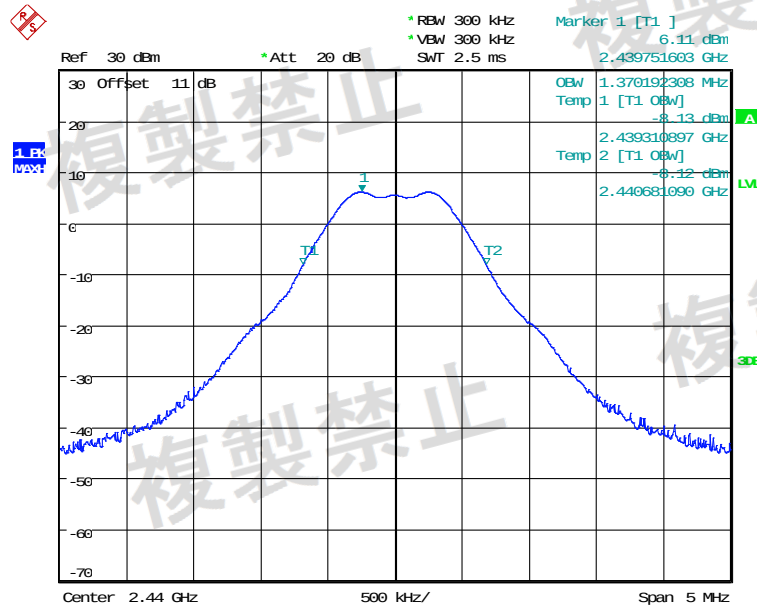


OCCUPIED BANDWIDTH BLE 1M CH19 3V
Date: 4.OCT.2025 16:59:21




Worldwide Testing Services(Taiwan) Co., Ltd.

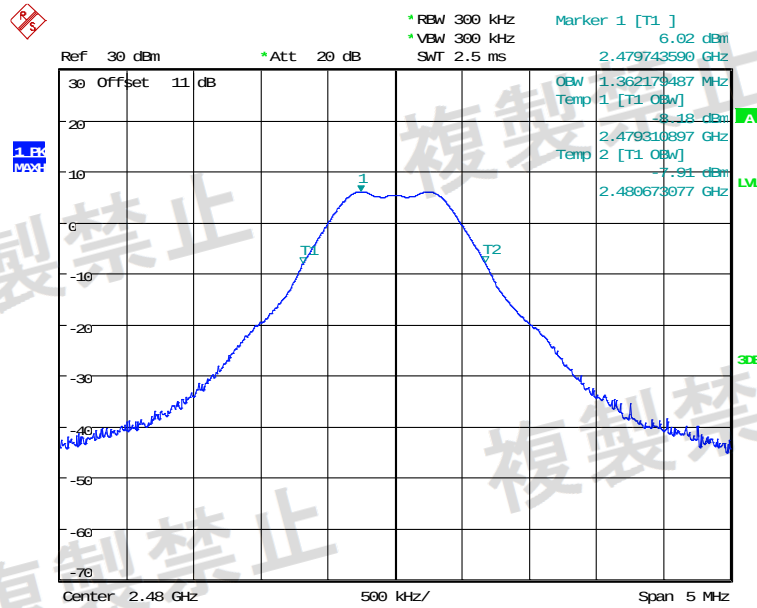


OCCUPIED BANDWIDTH BLE 1M CH39 3V
Date: 4.OCT.2025 17:00:25

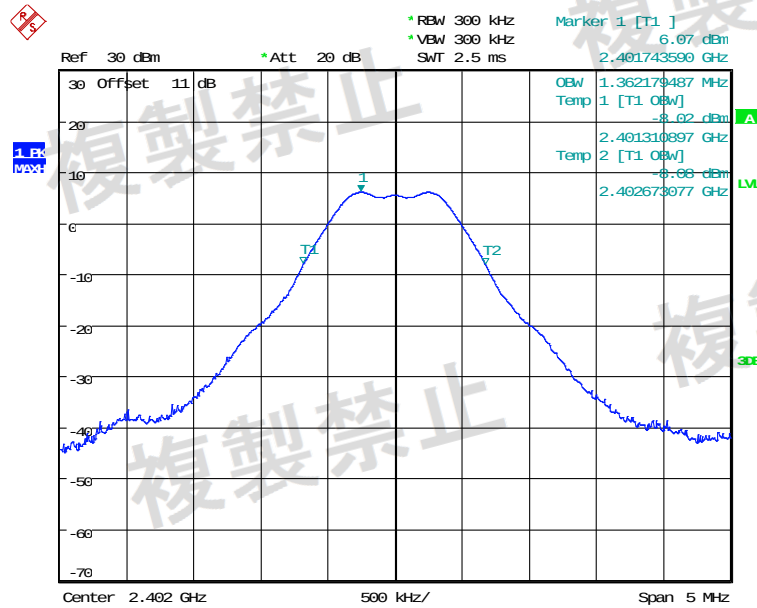


OCCUPIED BANDWIDTH BLE 1M CH00 2.7V
Date: 4.OCT.2025 17:03:27




Worldwide Testing Services(Taiwan) Co., Ltd.

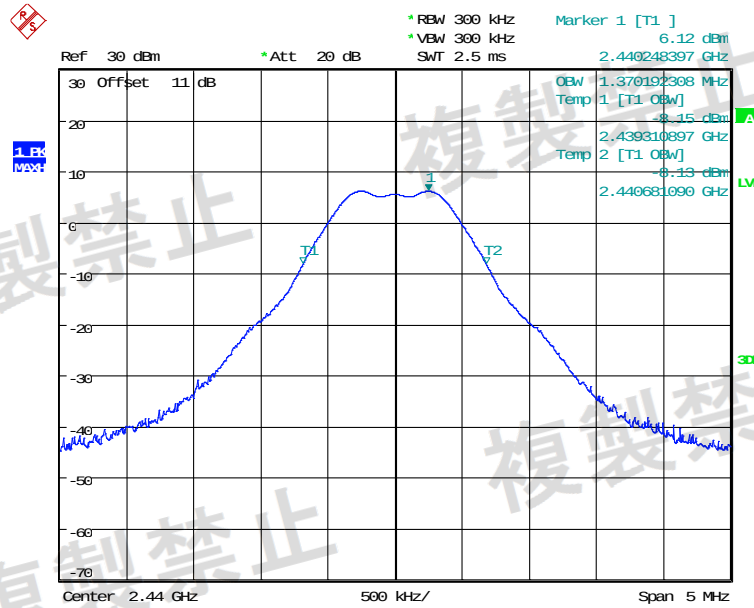


OCCUPIED BANDWIDTH BLE 1M CH19 2.7V
Date: 4.OCT.2025 17:02:44

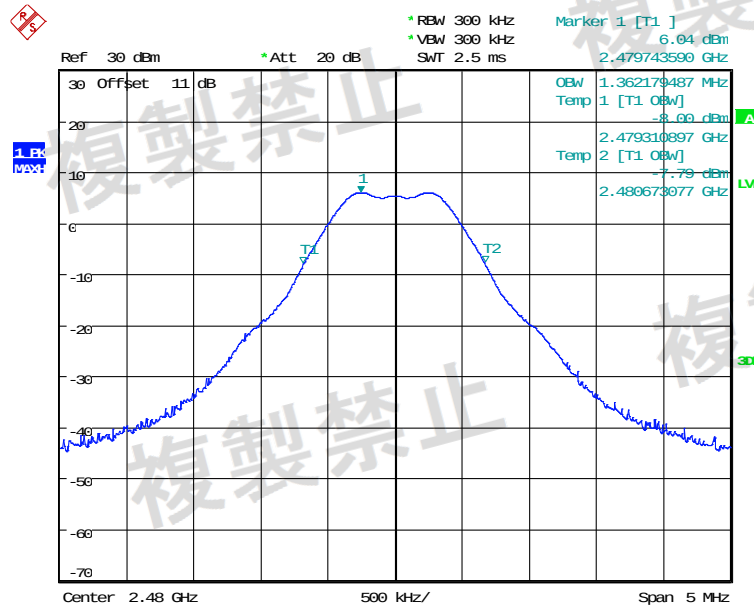


OCCUPIED BANDWIDTH BLE 1M CH39 2.7V
Date: 4.OCT.2025 17:04:00





Worldwide Testing Services(Taiwan) Co., Ltd.

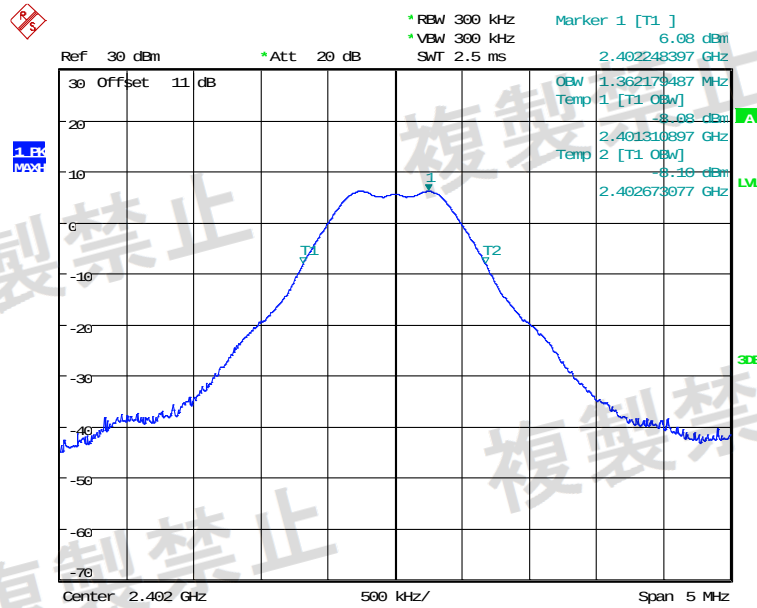

OCCUPIED BANDWIDTH BLE 1M CH00 3.3V
Date: 4.OCT.2025 17:01:30

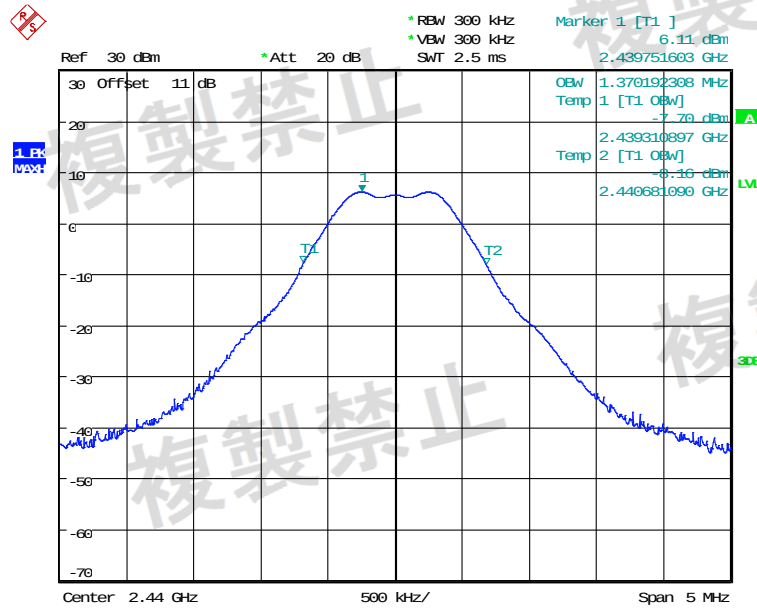

OCCUPIED BANDWIDTH BLE 1M CH19 3.3V
Date: 4.OCT.2025 17:02:03

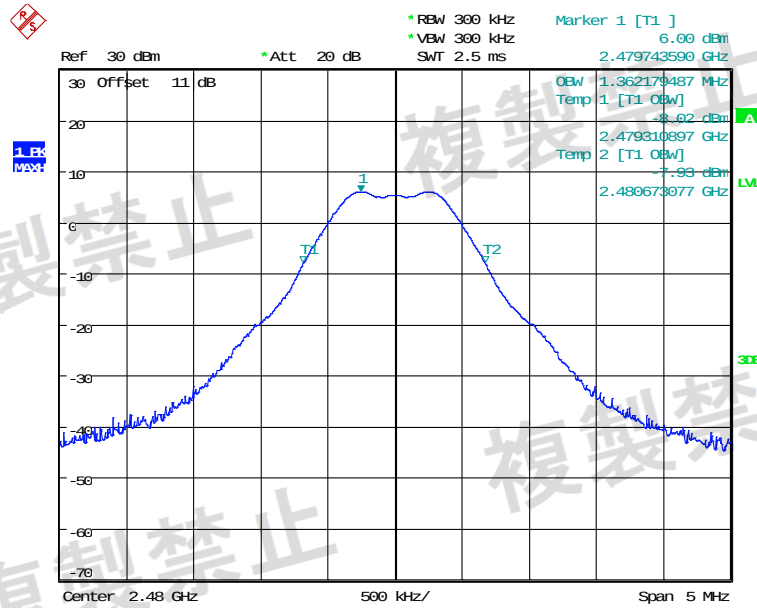


OCCUPIED BANDWIDTH BLE 1M CH39 3.3V
Date: 4.OCT.2025 17:00:59

Limits:

Under all test conditions	Occupied bandwidth: ≤ 83.5 MHz
---------------------------	--------------------------------

Explanation: ./.



3.4 Spreading Bandwidth

Test date: --

Temperature: -- °C


Humidity: -- %

Tester: --

Explanation: This test is not required because the EUT belongs to other digital modulation.




3.5 Spurious emissions (conducted)_ transmitter

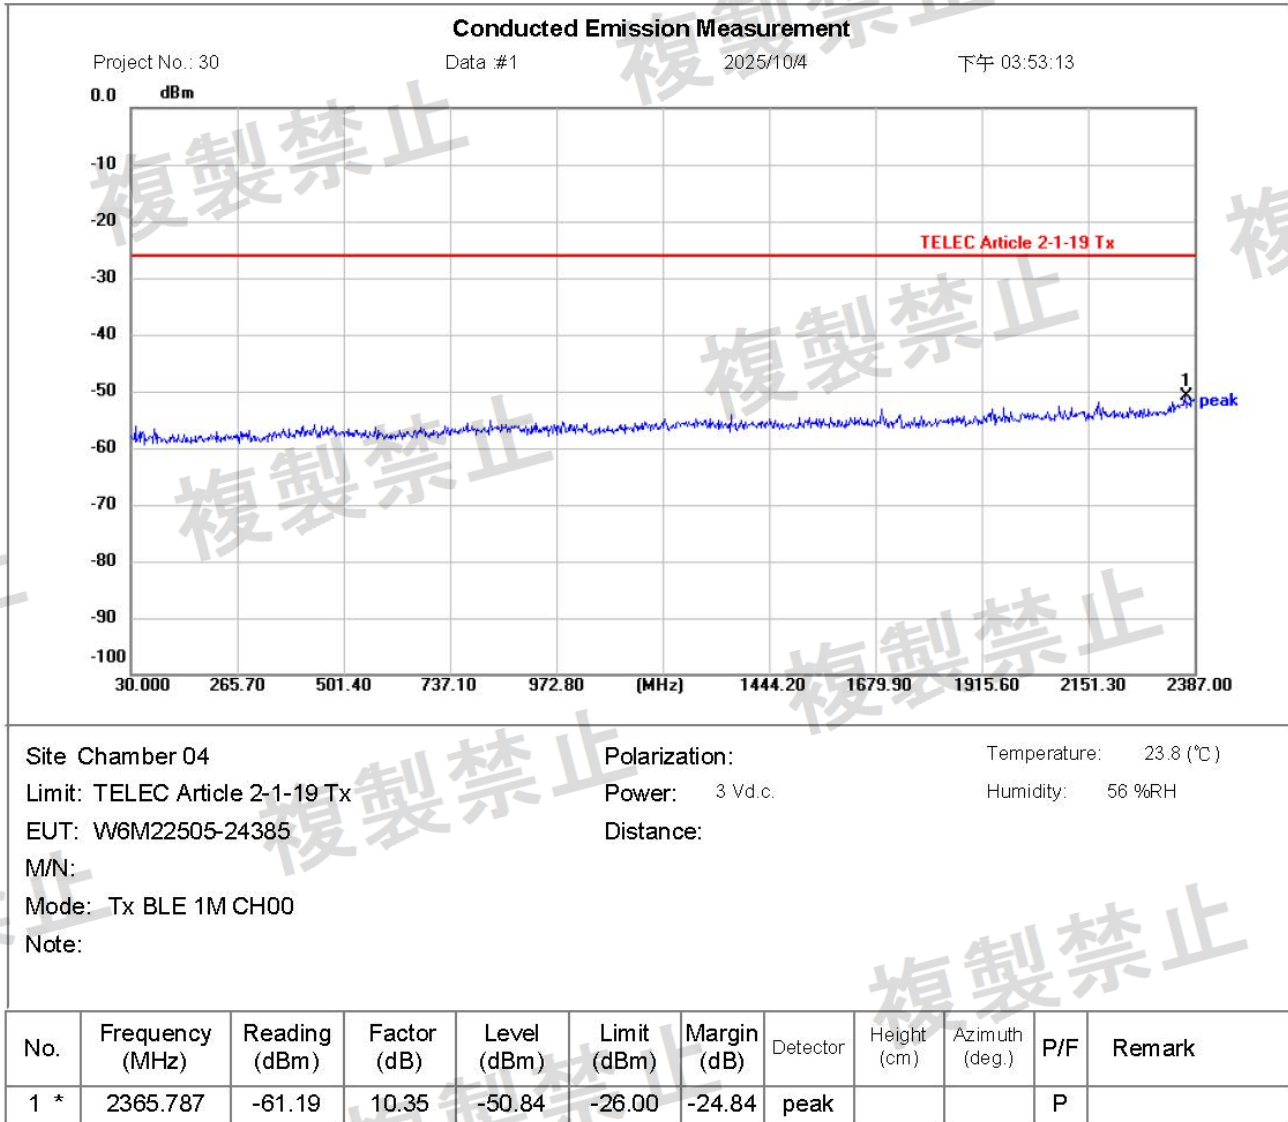




Worldwide Testing Services(Taiwan) Co., Ltd.

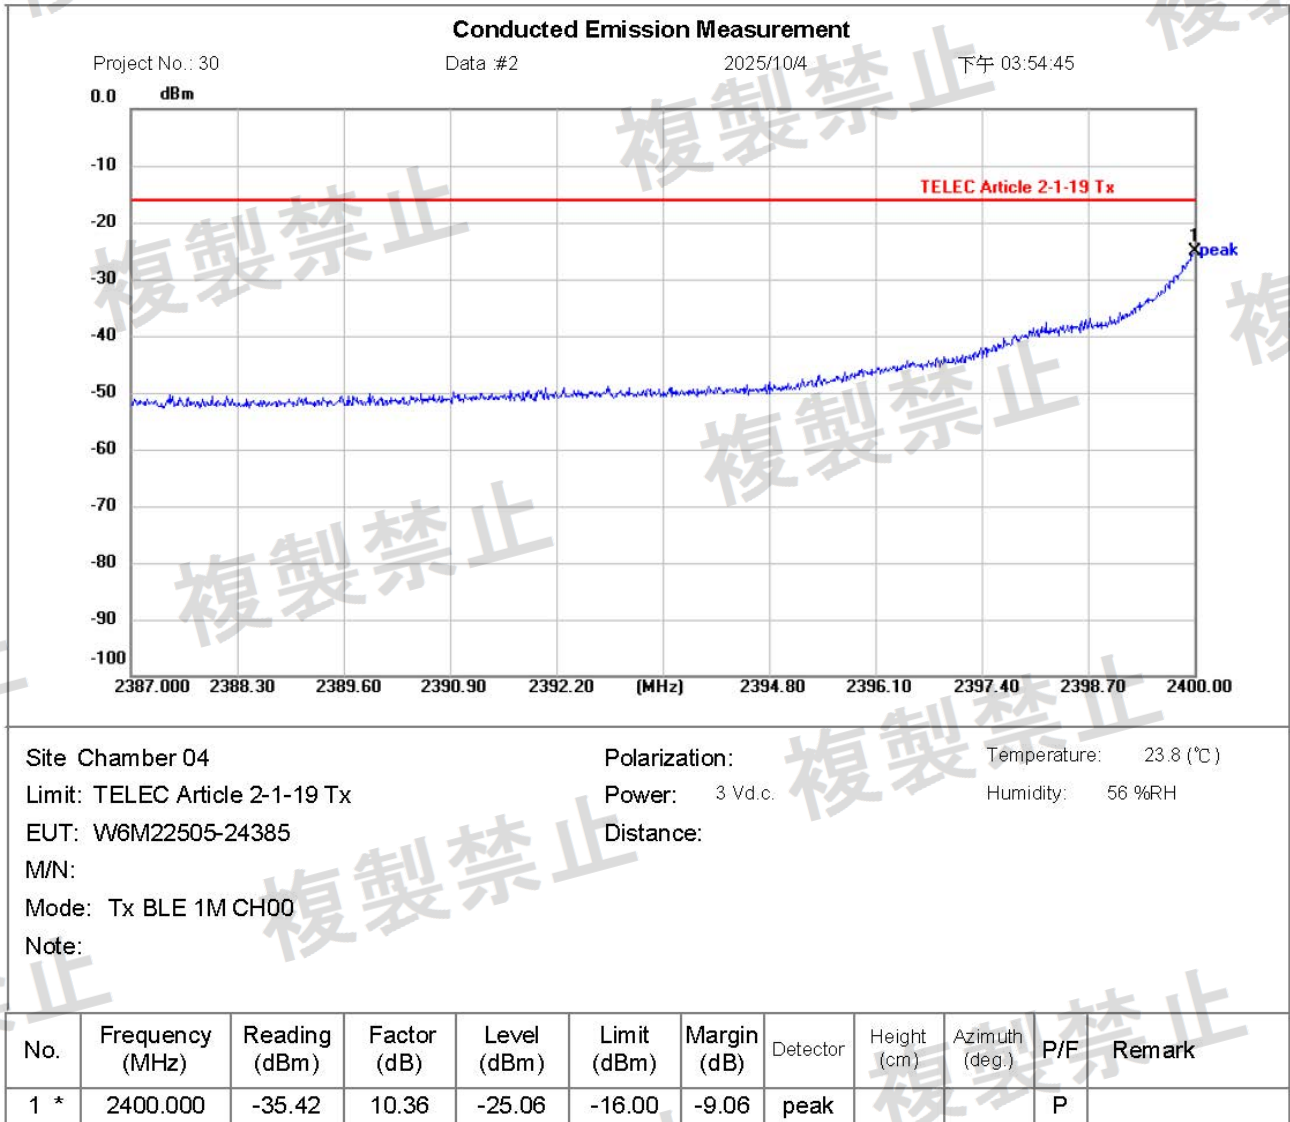




Worldwide Testing Services(Taiwan) Co., Ltd.

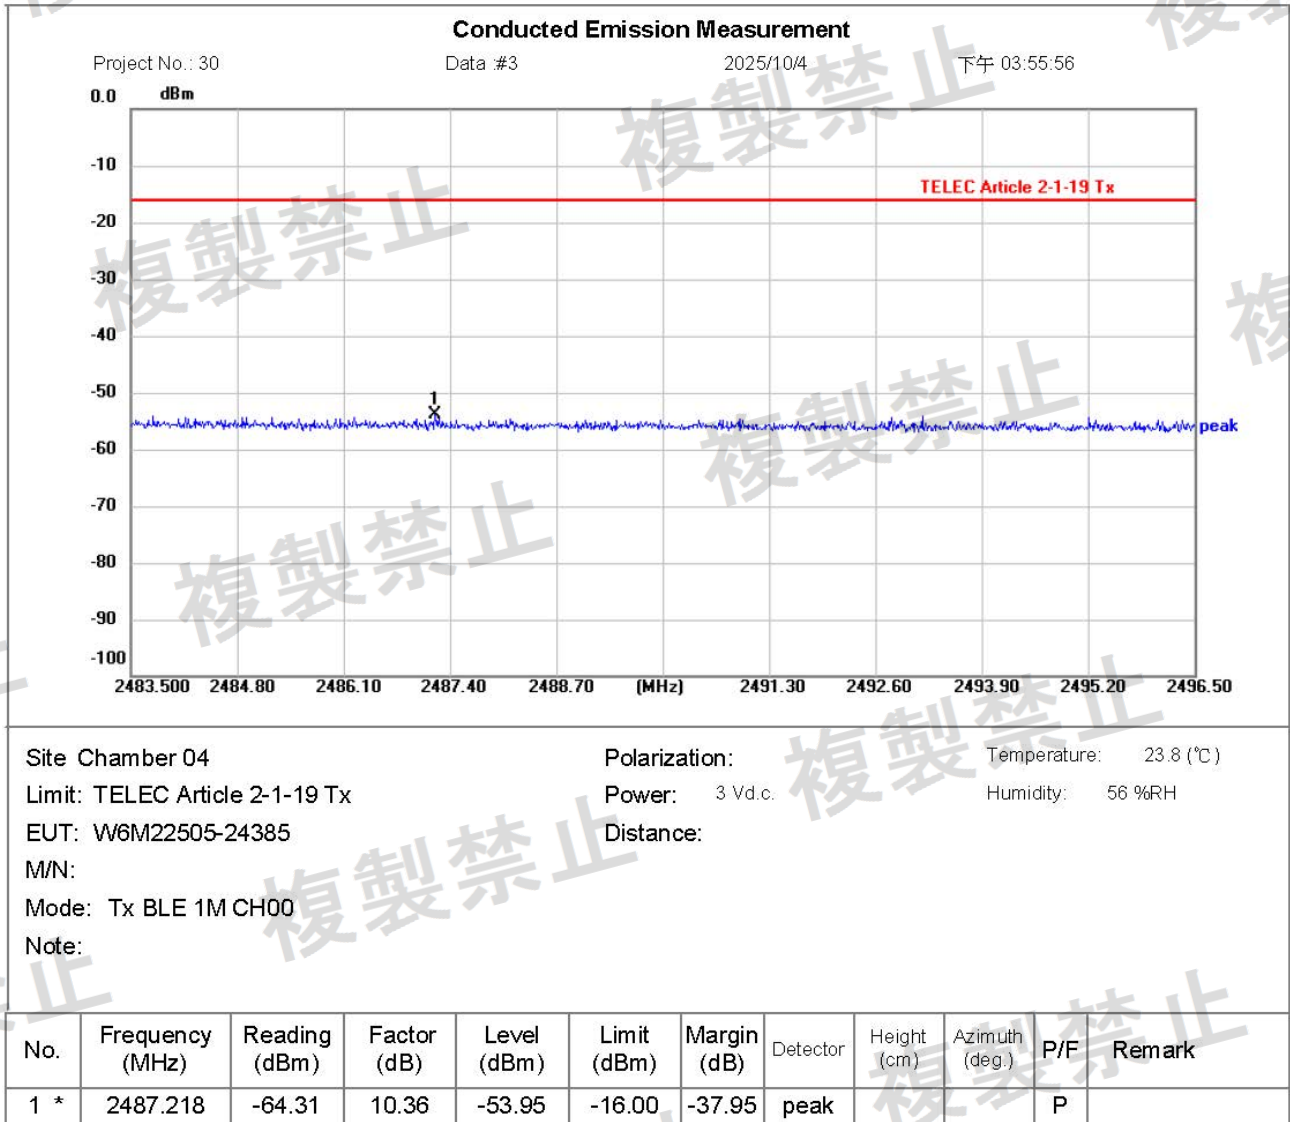




Worldwide Testing Services(Taiwan) Co., Ltd.

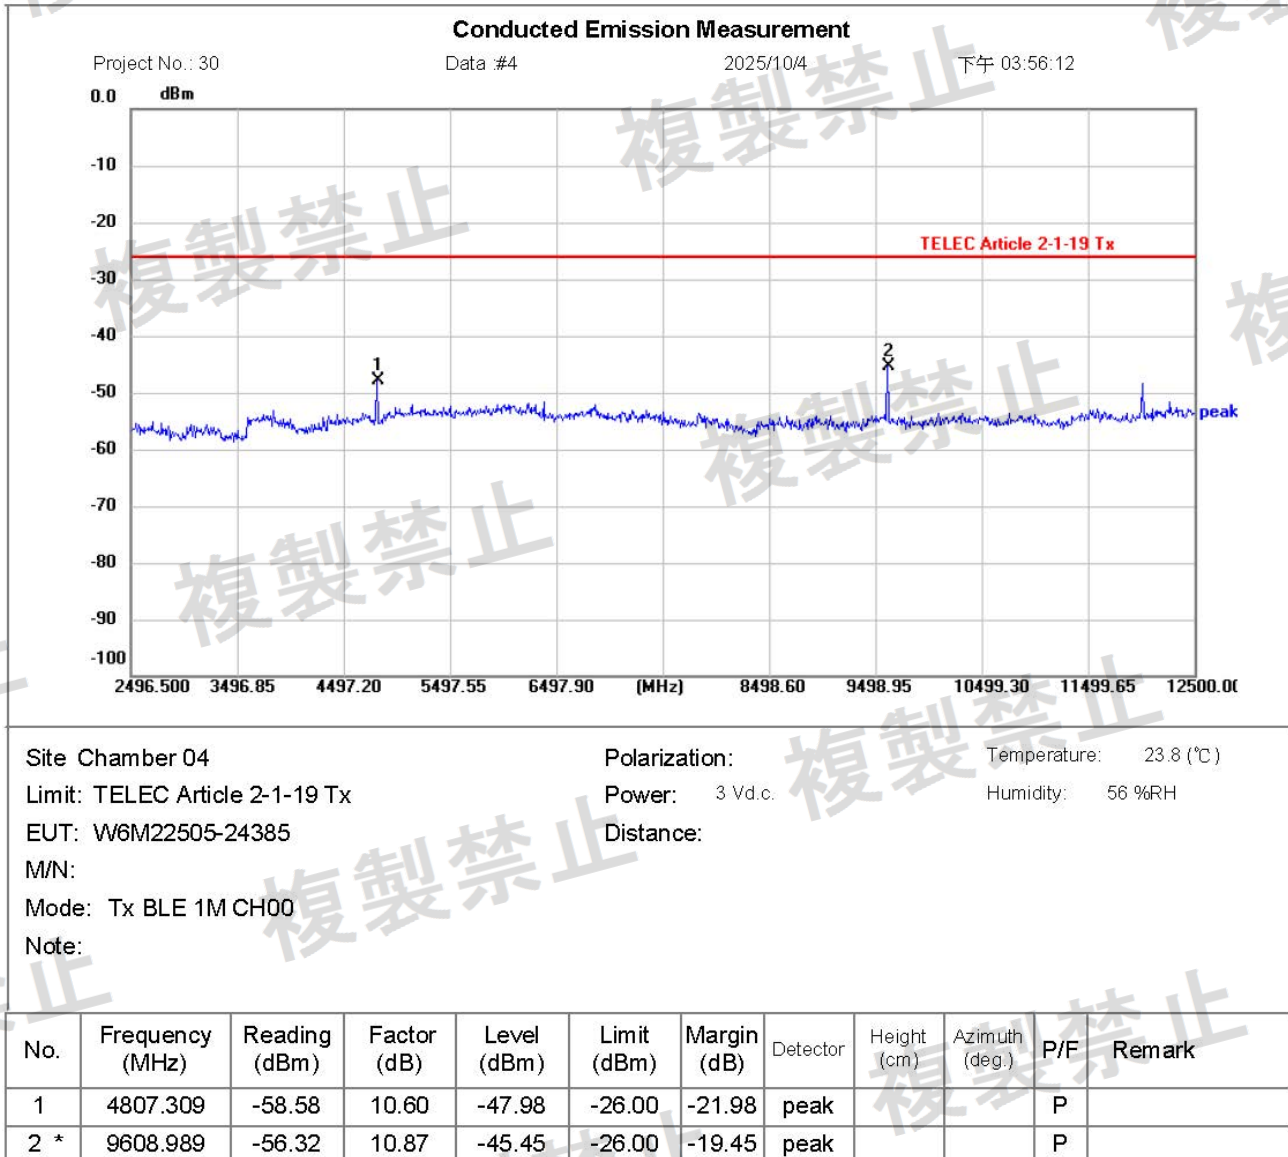




Worldwide Testing Services(Taiwan) Co., Ltd.

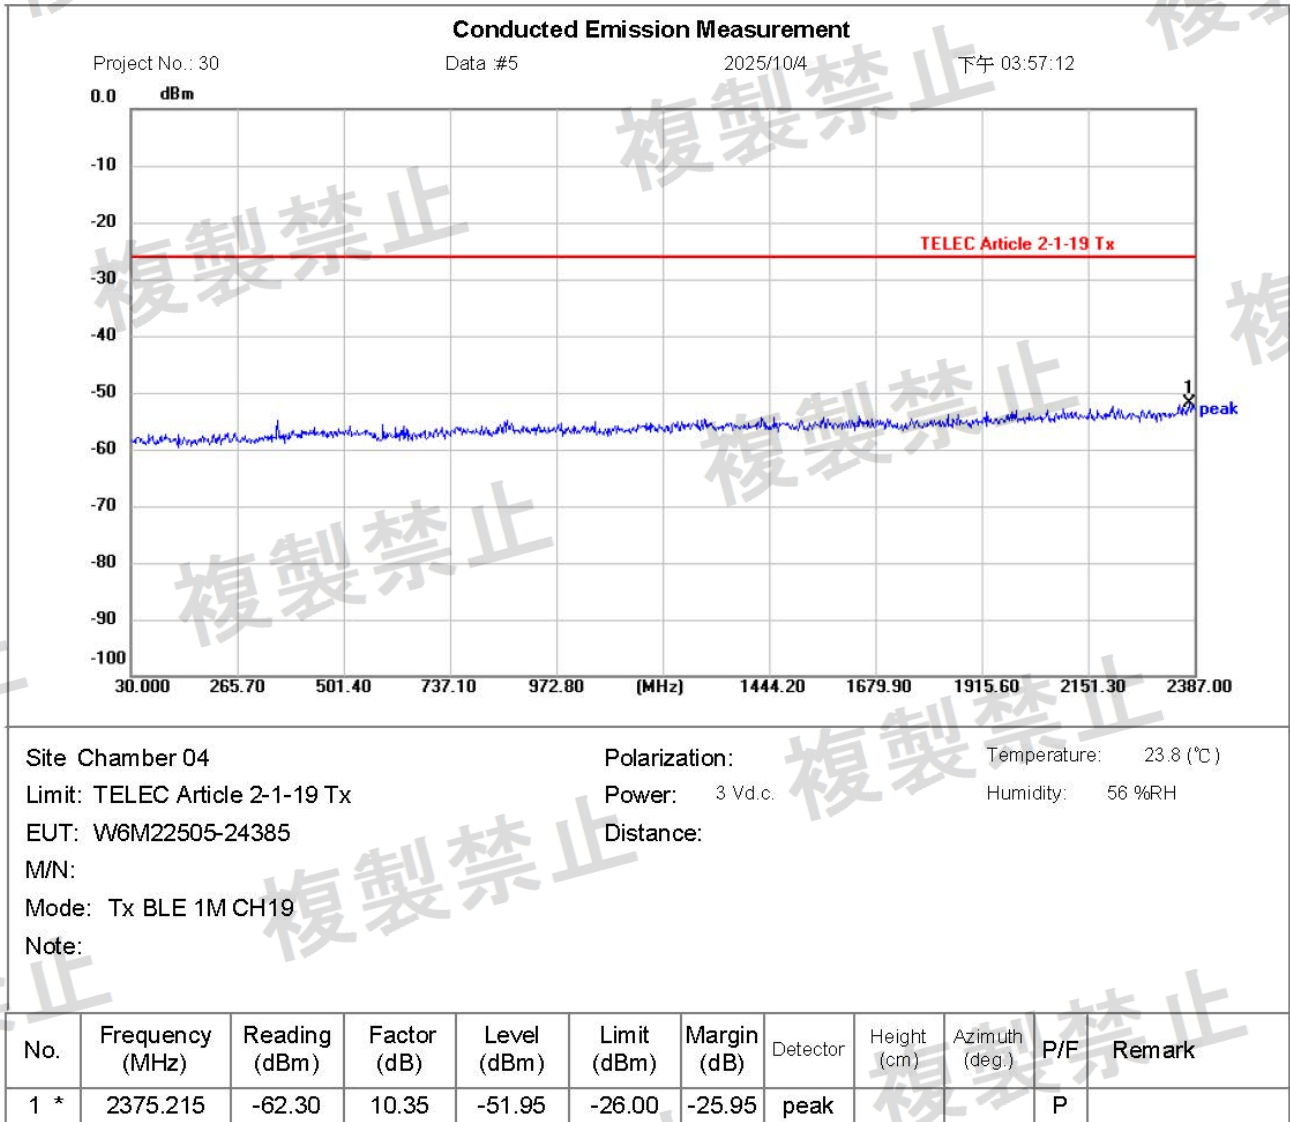





Worldwide Testing Services(Taiwan) Co., Ltd.

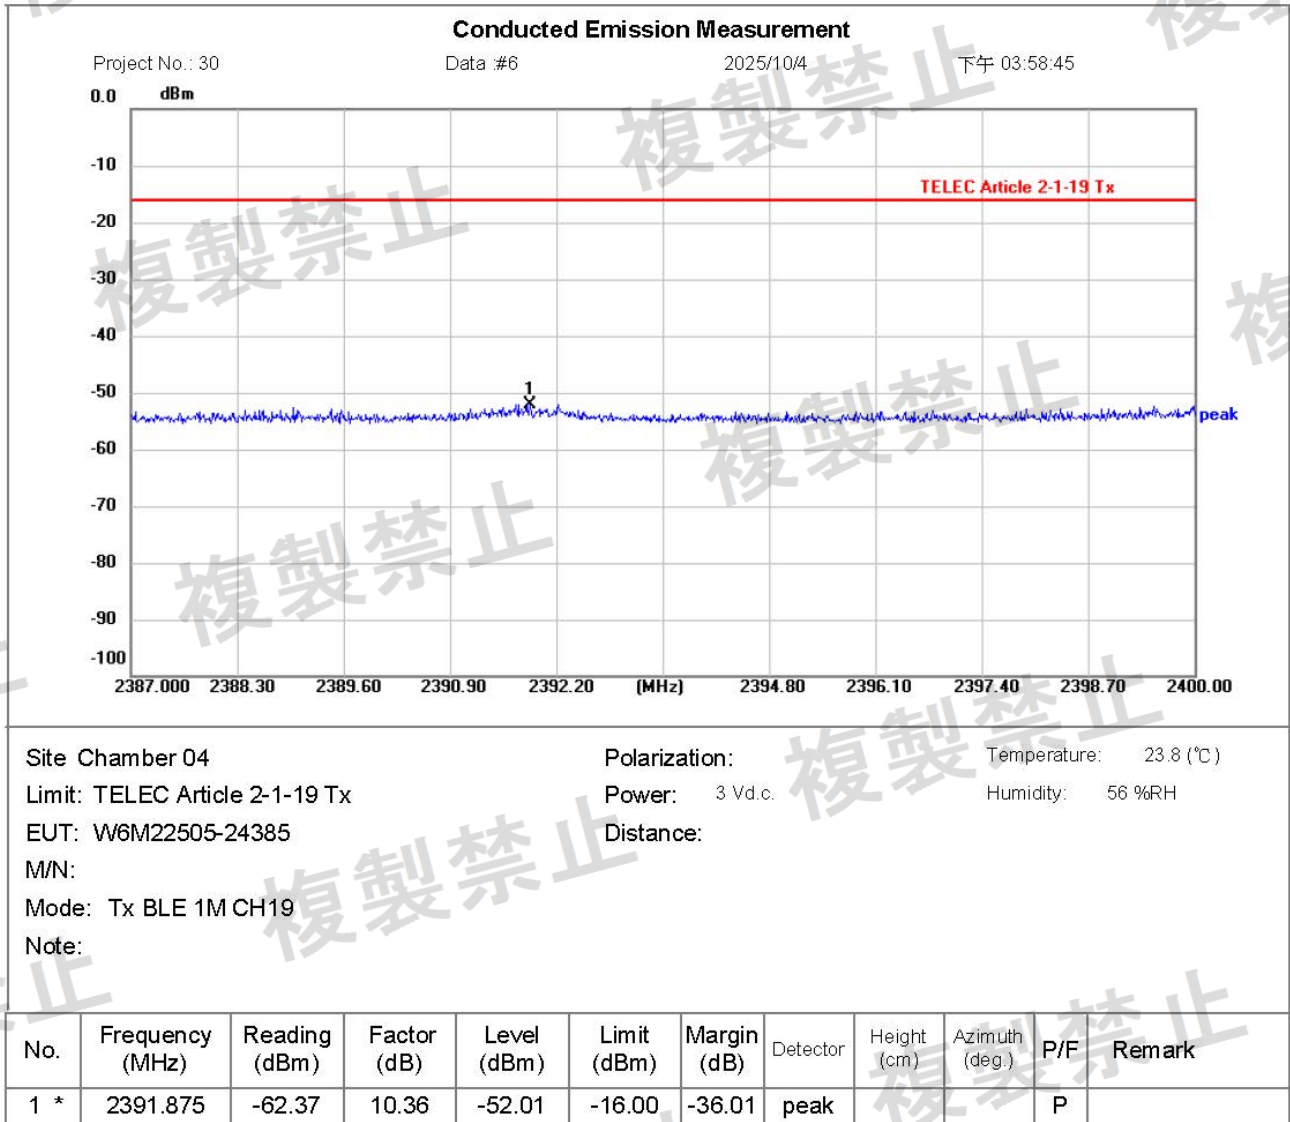




Worldwide Testing Services(Taiwan) Co., Ltd.

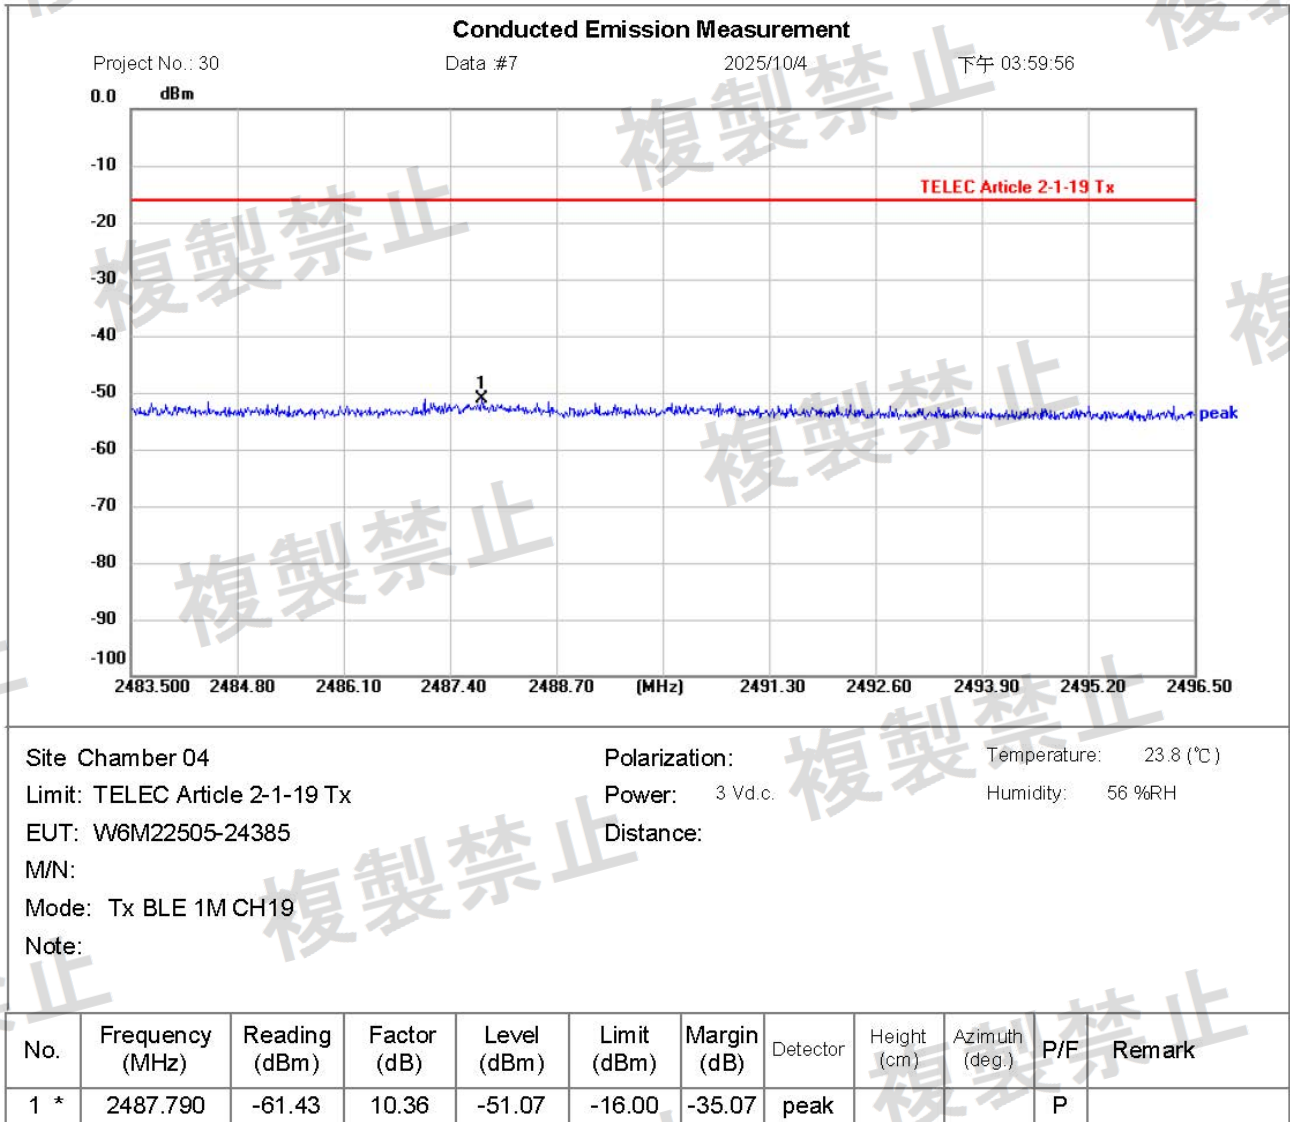





Worldwide Testing Services(Taiwan) Co., Ltd.

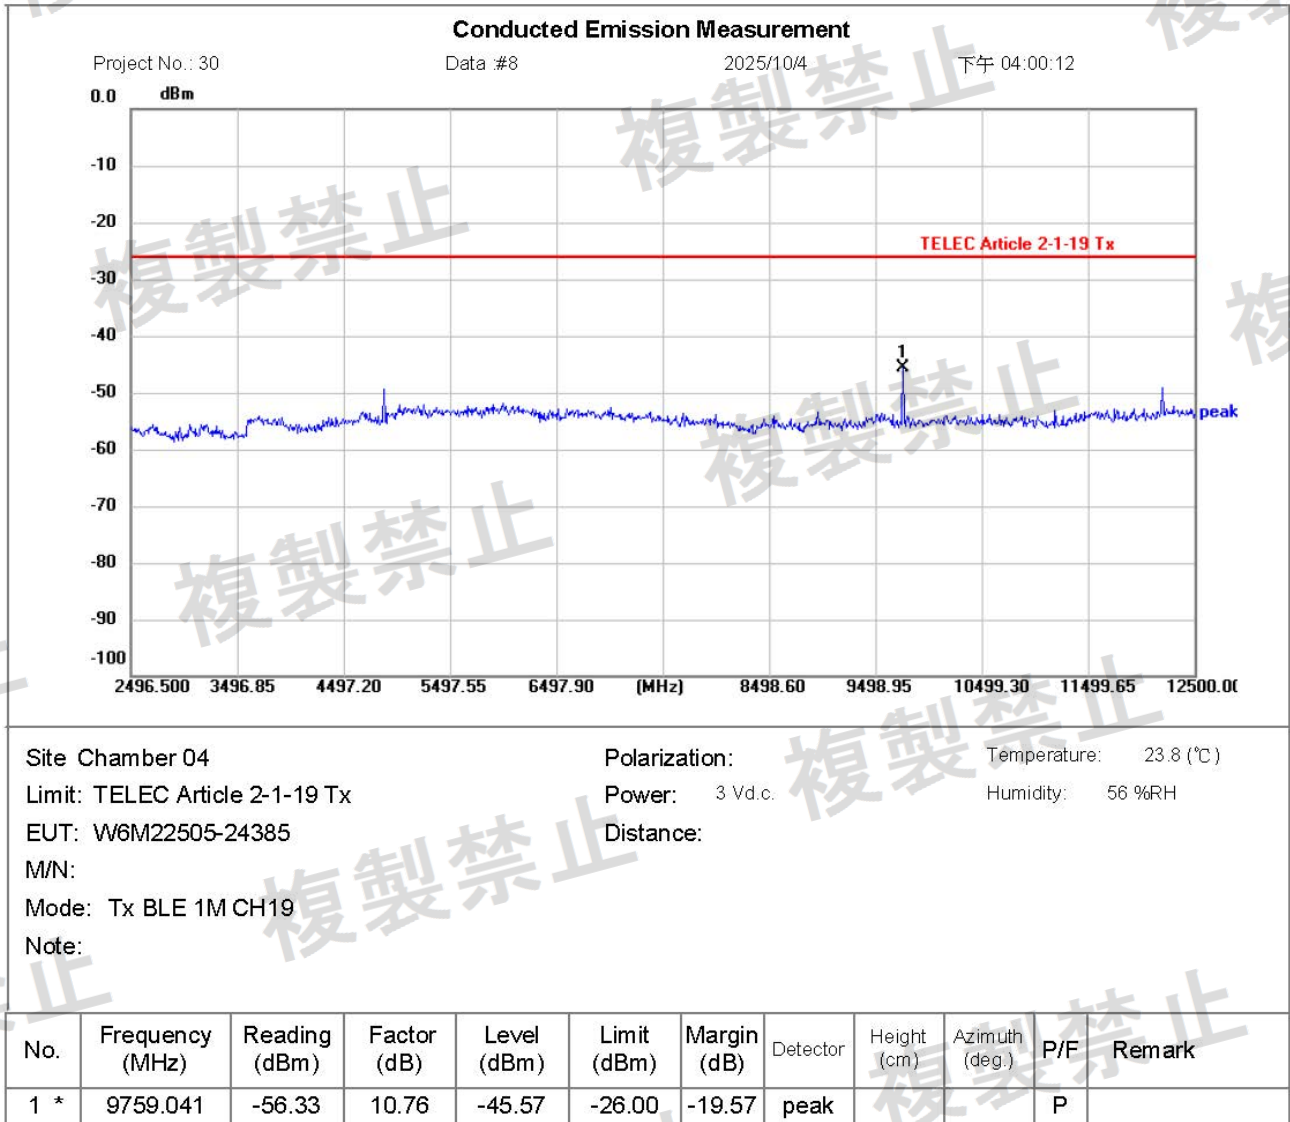



Worldwide Testing Services(Taiwan) Co., Ltd.

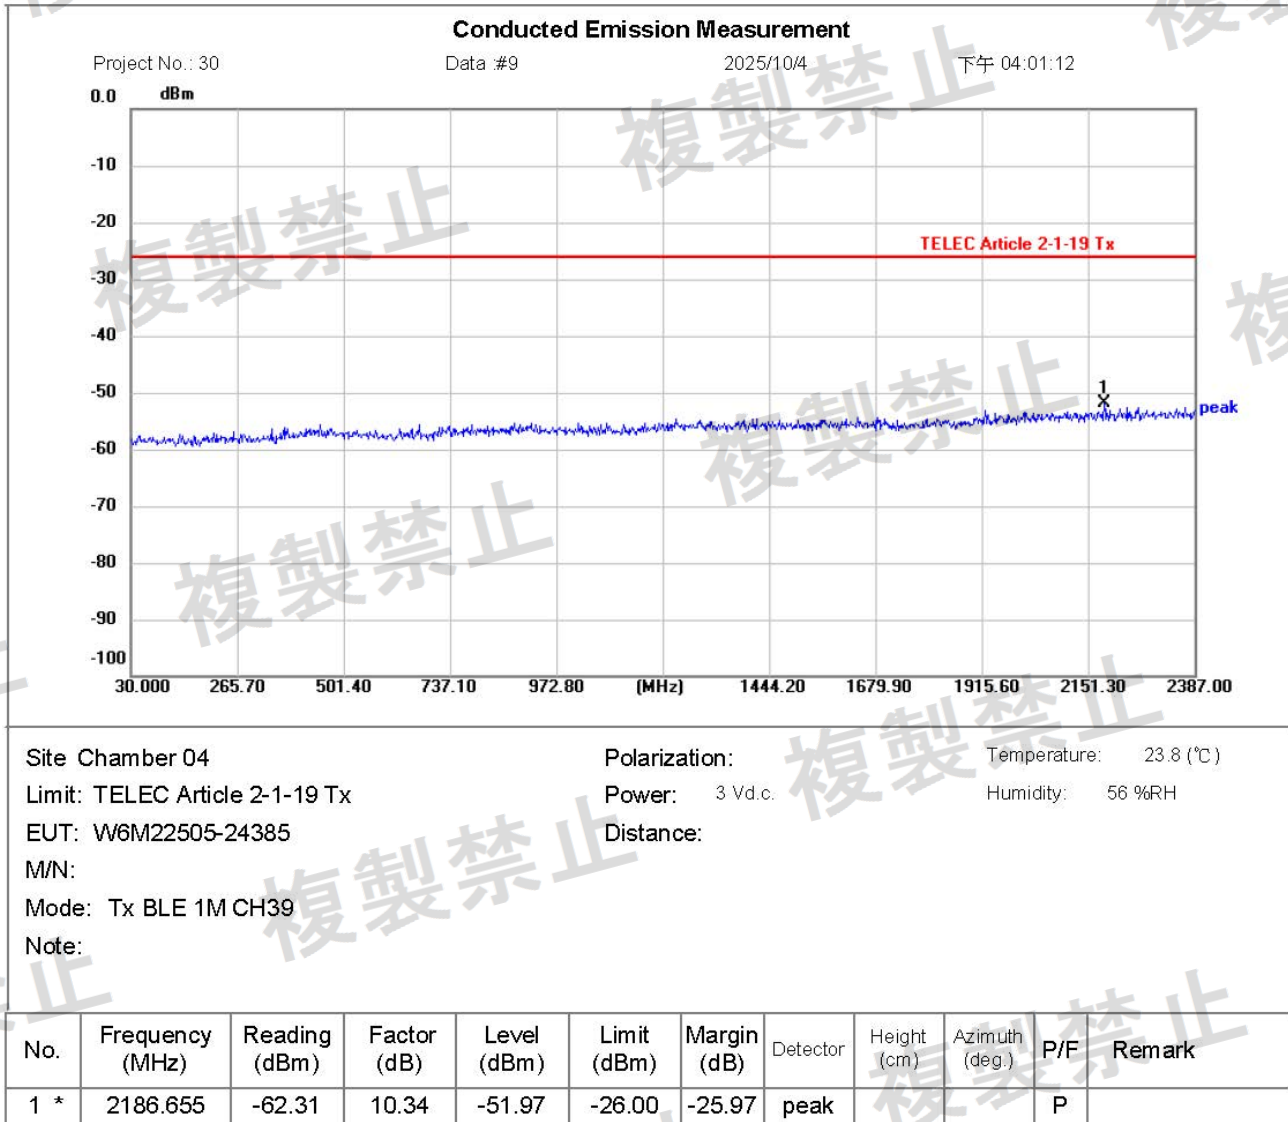



Worldwide Testing Services(Taiwan) Co., Ltd.


Conducted Emission Measurement

Project No.: 30

Data #10

2025/10/4

下午 04:02:44

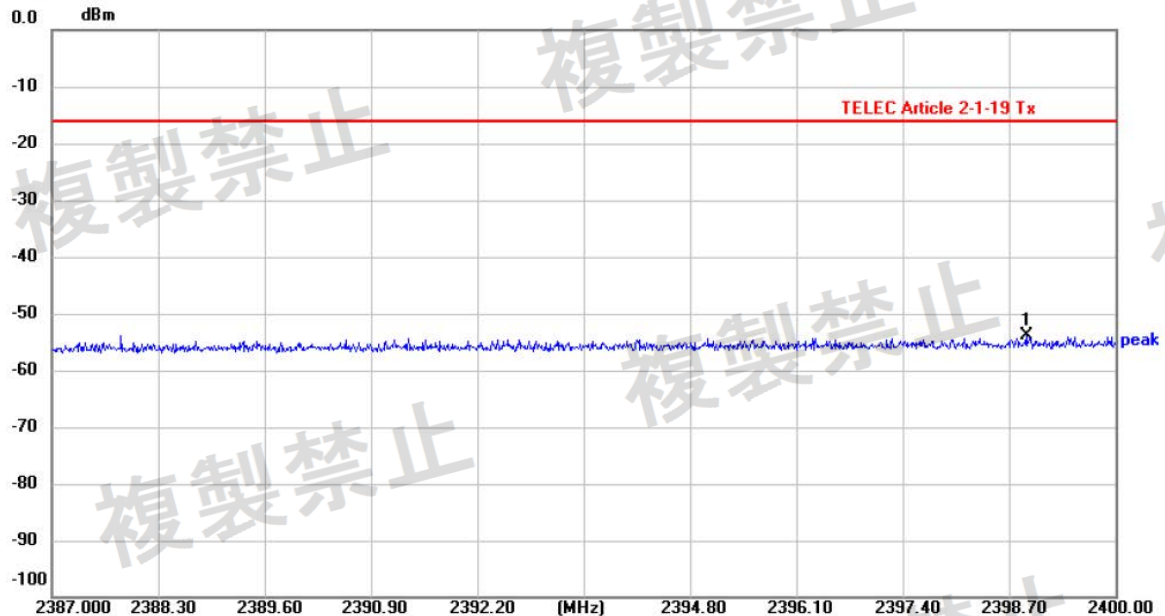

Site Chamber 04

Polarization:

Temperature: 23.8 (°C)

Limit: TELEC Article 2-1-19 Tx

Power: 3 Vd.c.

Humidity: 56 %RH

EUT: W6M22505-24385


Distance:

M/N:

Mode: Tx BLE 1M CH39

Note:

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1 *	2398.908	-64.19	10.36	-53.83	-16.00	-37.83	peak			P	



Worldwide Testing Services(Taiwan) Co., Ltd.


Conducted Emission Measurement

Project No.: 30

Data #11

2025/10/4

下午 04:03:55

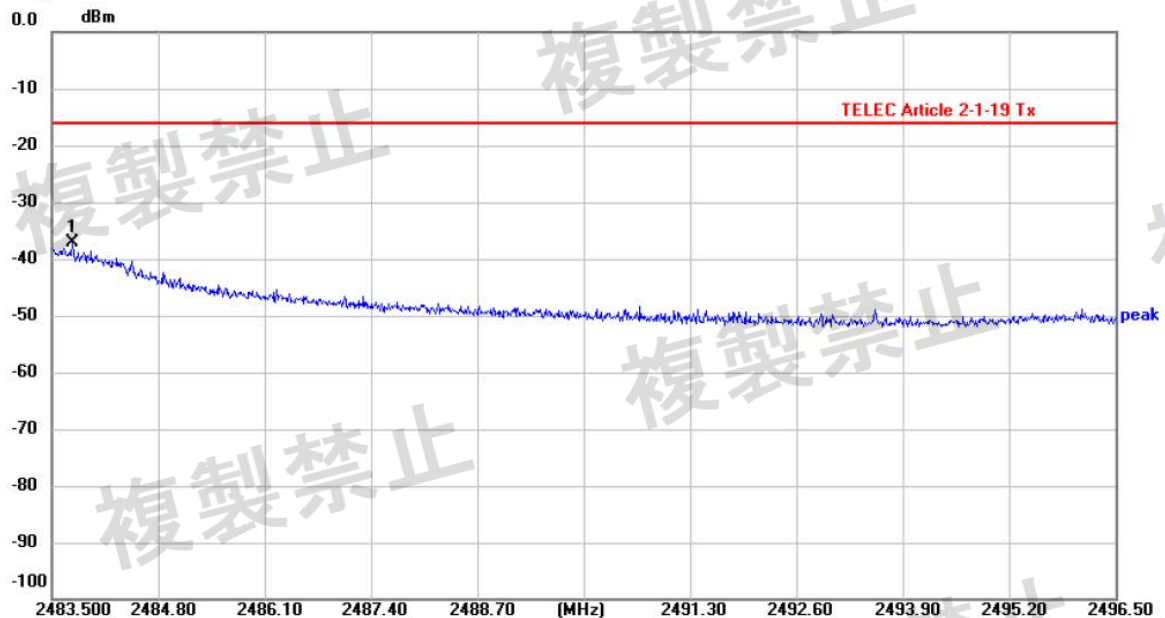

Site Chamber 04

Polarization:

Temperature: 23.8 (°C)

Limit: TELEC Article 2-1-19 Tx

Power: 3 Vd.c.

Humidity: 56 %RH

EUT: W6M22505-24385

Distance:

M/N:


Mode: Tx BLE 1M CH39

Note:

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1 *	2483.747	-47.42	10.36	-37.06	-16.00	-21.06	peak			P	




Worldwide Testing Services(Taiwan) Co., Ltd.

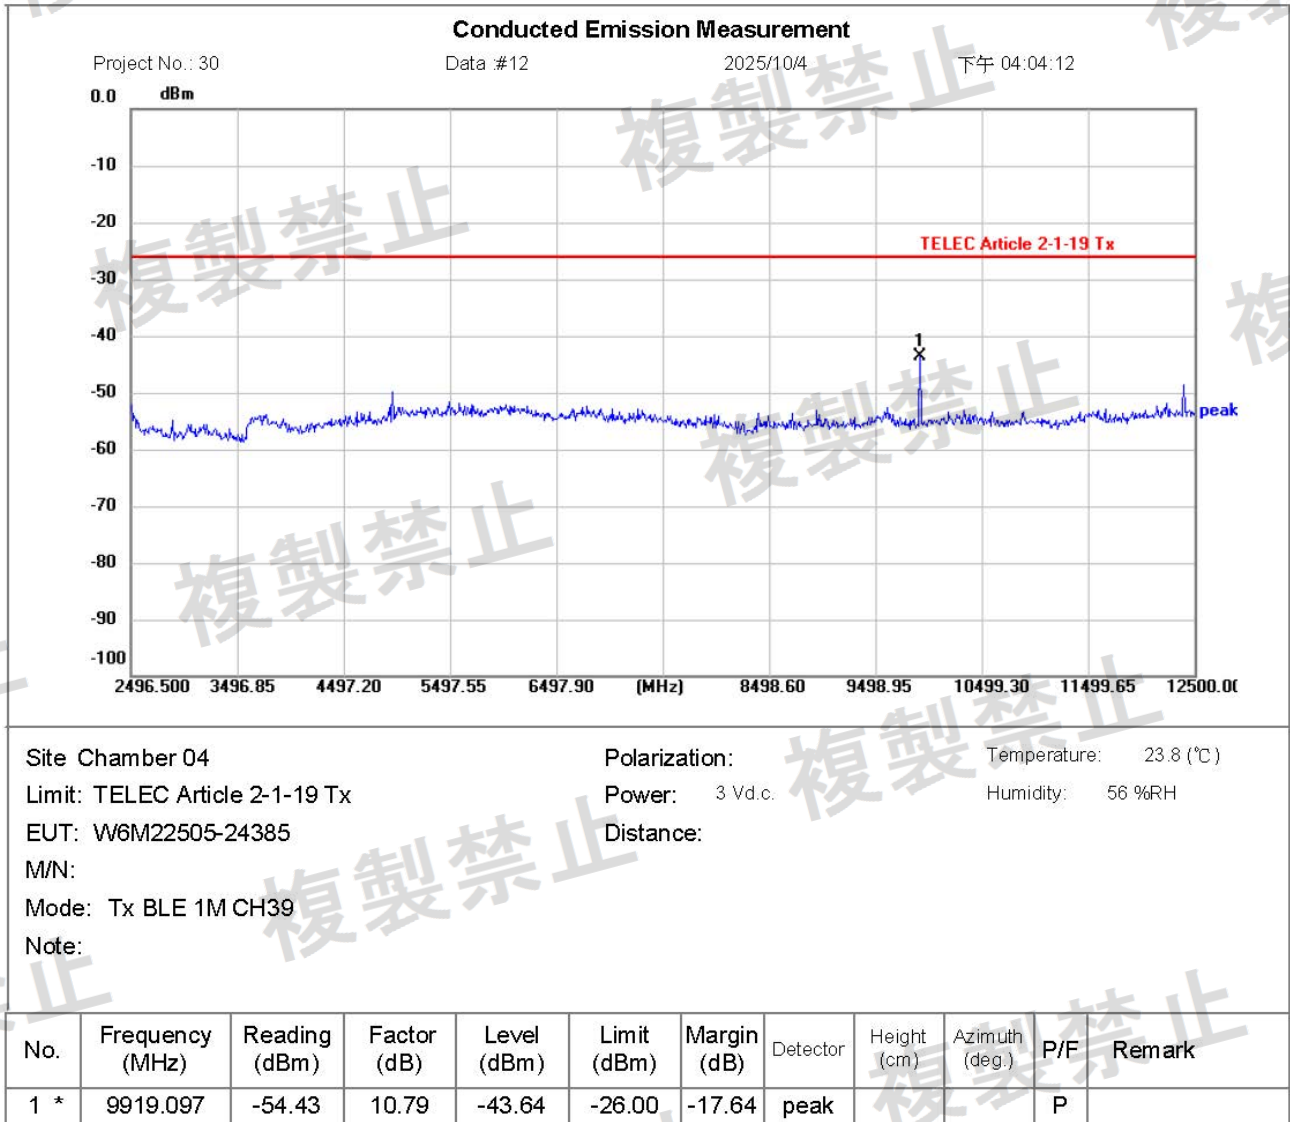





Worldwide Testing Services(Taiwan) Co., Ltd.

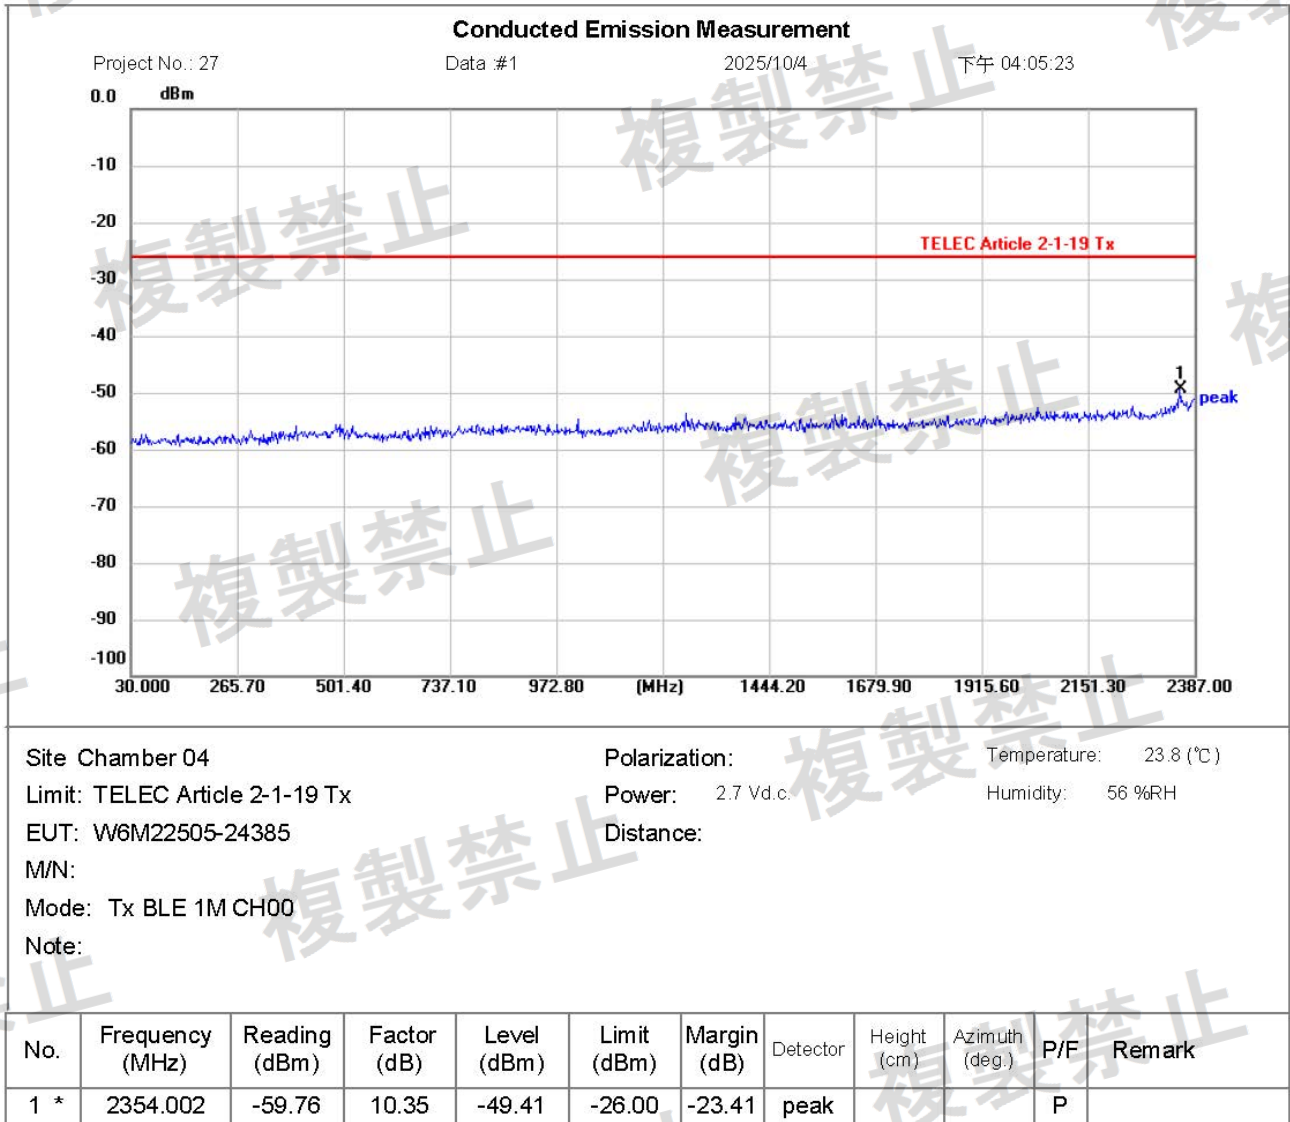



Worldwide Testing Services(Taiwan) Co., Ltd.

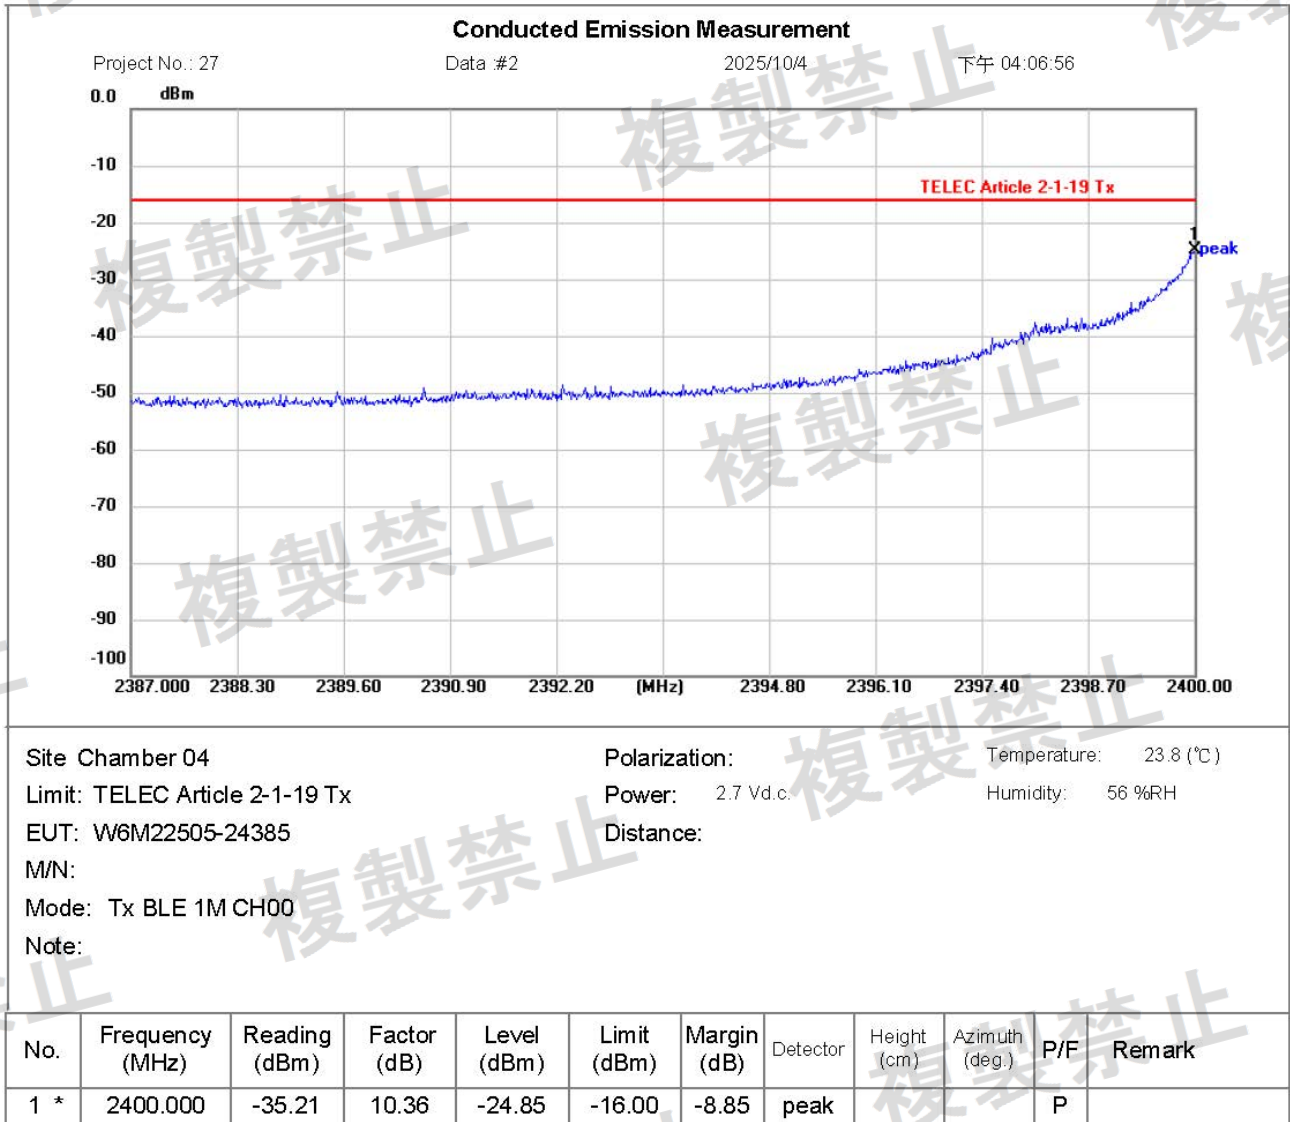



Worldwide Testing Services(Taiwan) Co., Ltd.


Conducted Emission Measurement

Project No.: 27

Data #3

2025/10/4

下午 04:08:07

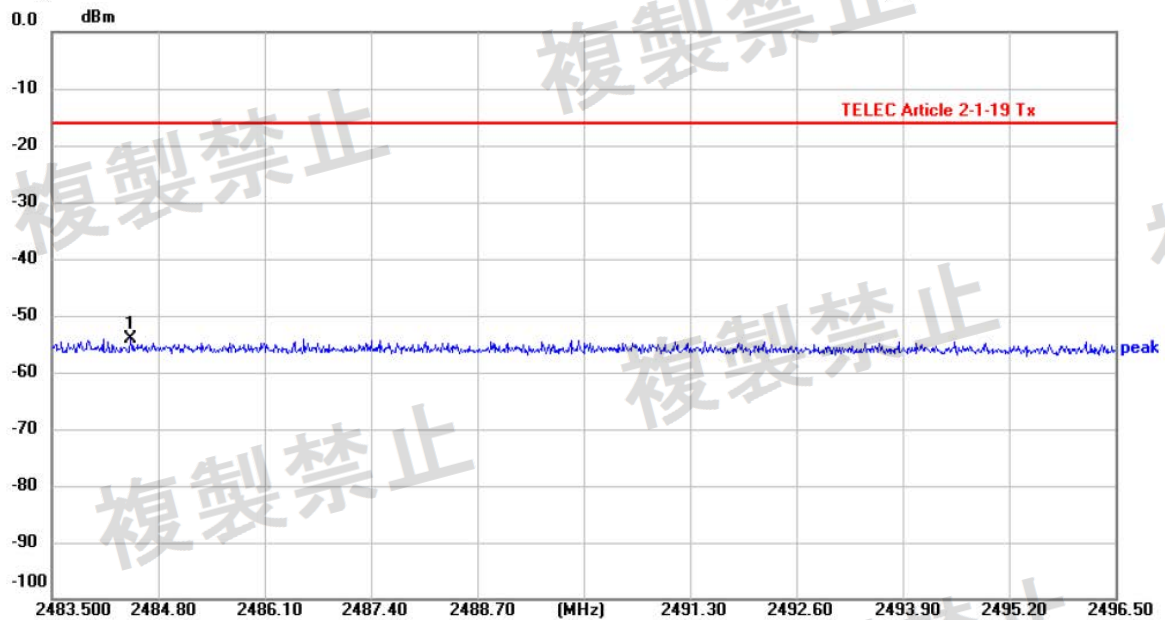

Site Chamber 04

Polarization:

Temperature: 23.8 (°C)

Limit: TELEC Article 2-1-19 Tx

Power: 2.7 Vd.c.

Humidity: 56 %RH

EUT: W6M22505-24385

Distance:

M/N:


Mode: Tx BLE 1M CH00

Note:

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1 *	2484.462	-64.46	10.36	-54.10	-16.00	-38.10	peak			P	




Worldwide Testing Services(Taiwan) Co., Ltd.

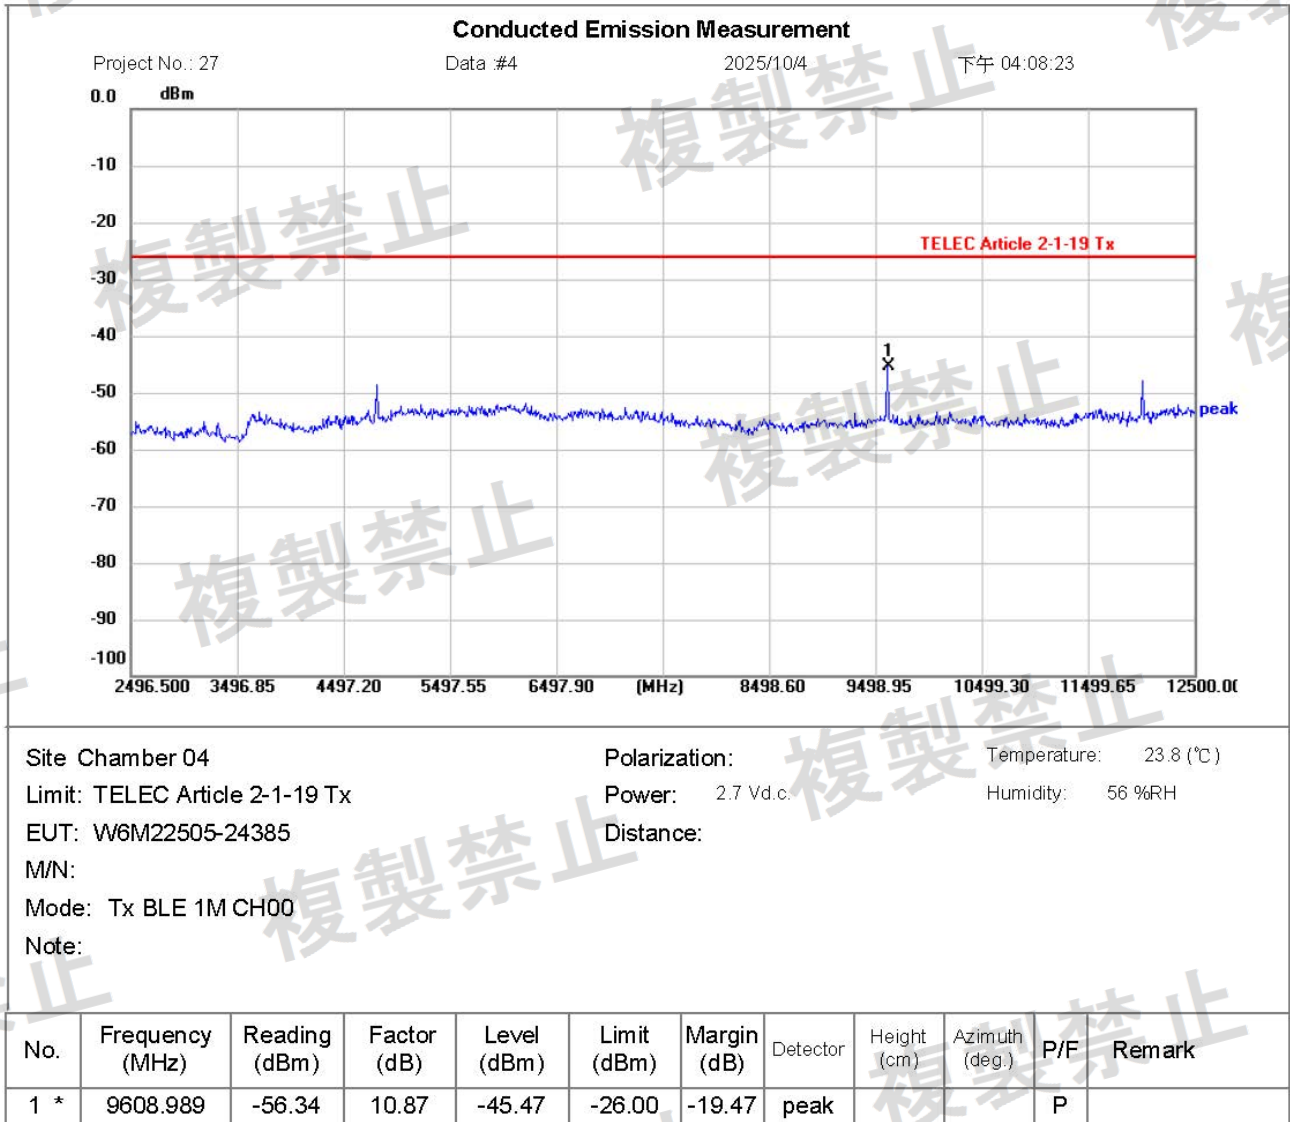



Worldwide Testing Services(Taiwan) Co., Ltd.

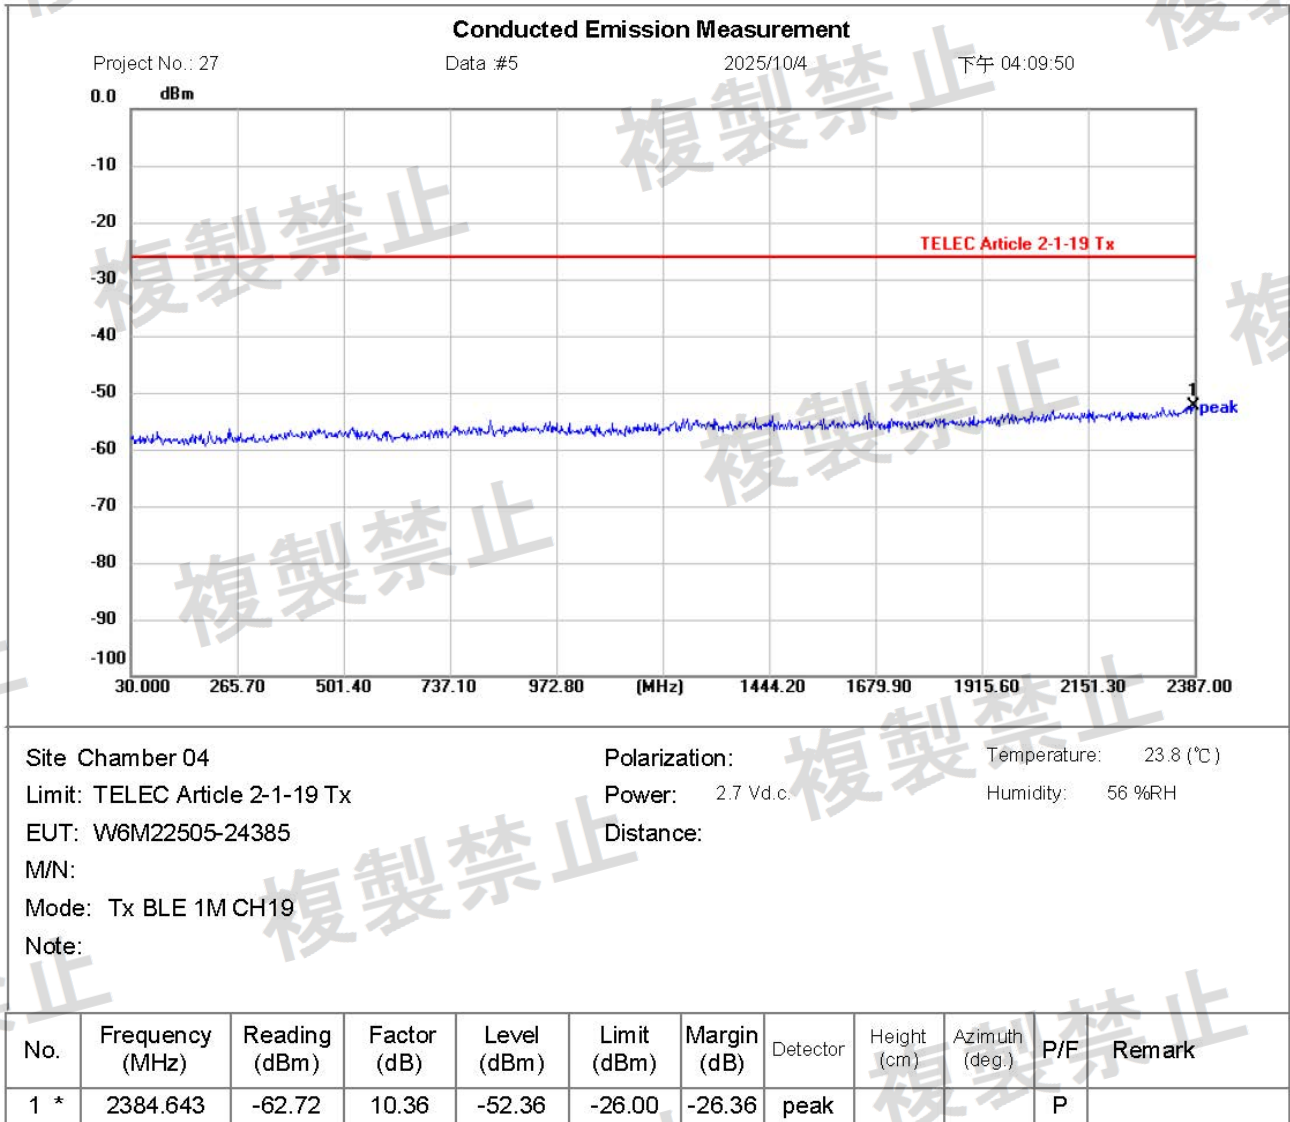



Worldwide Testing Services(Taiwan) Co., Ltd.


Conducted Emission Measurement

Project No.: 27

Data #6

2025/10/4

下午 04:11:23

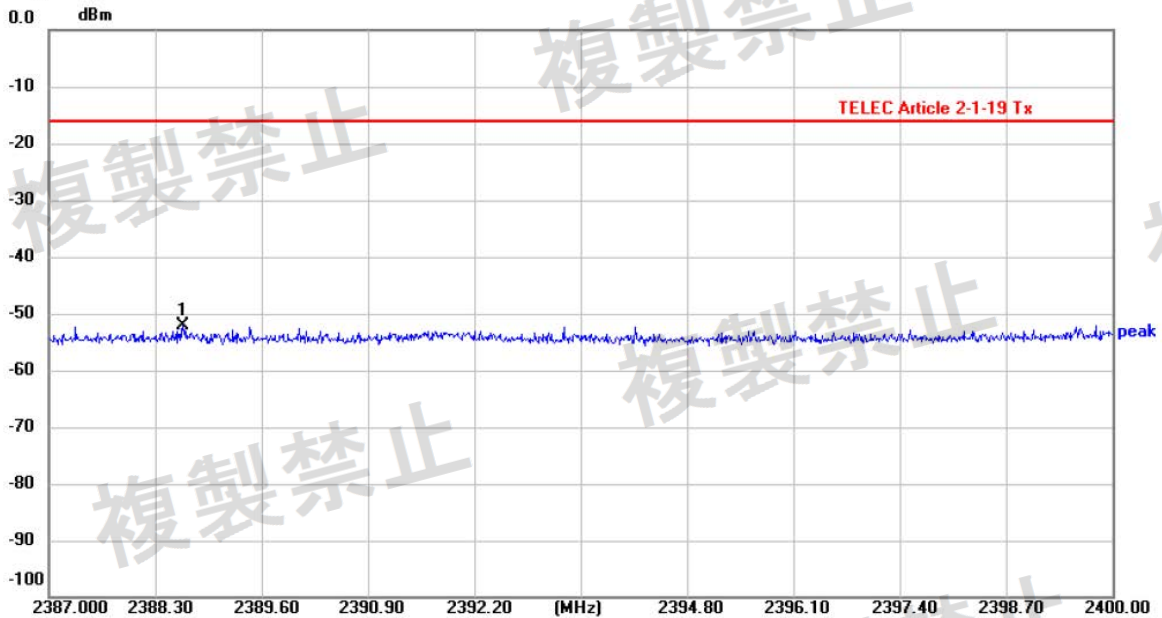

Site Chamber 04

Polarization:

Temperature: 23.8 (°C)

Limit: TELEC Article 2-1-19 Tx

Power: 2.7 Vd.c.

Humidity: 56 %RH

EUT: W6M22505-24385


Distance:

M/N:


Mode: Tx BLE 1M CH19


Note:

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1 *	2388.638	-62.37	10.36	-52.01	-16.00	-36.01	peak			P	





Worldwide Testing Services(Taiwan) Co., Ltd.

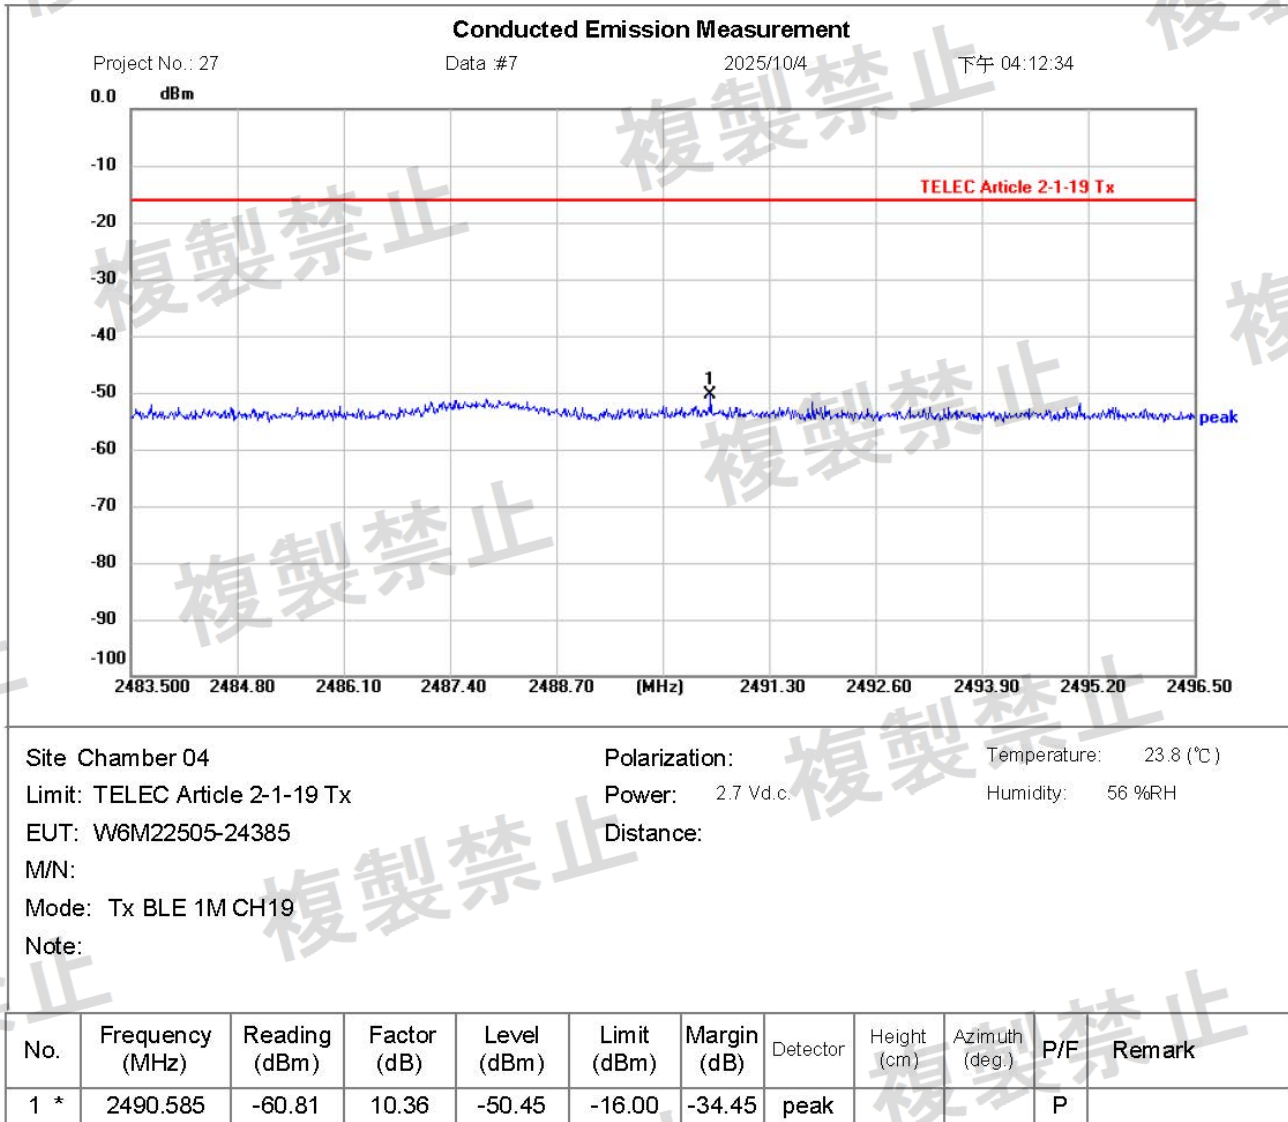



Worldwide Testing Services(Taiwan) Co., Ltd.

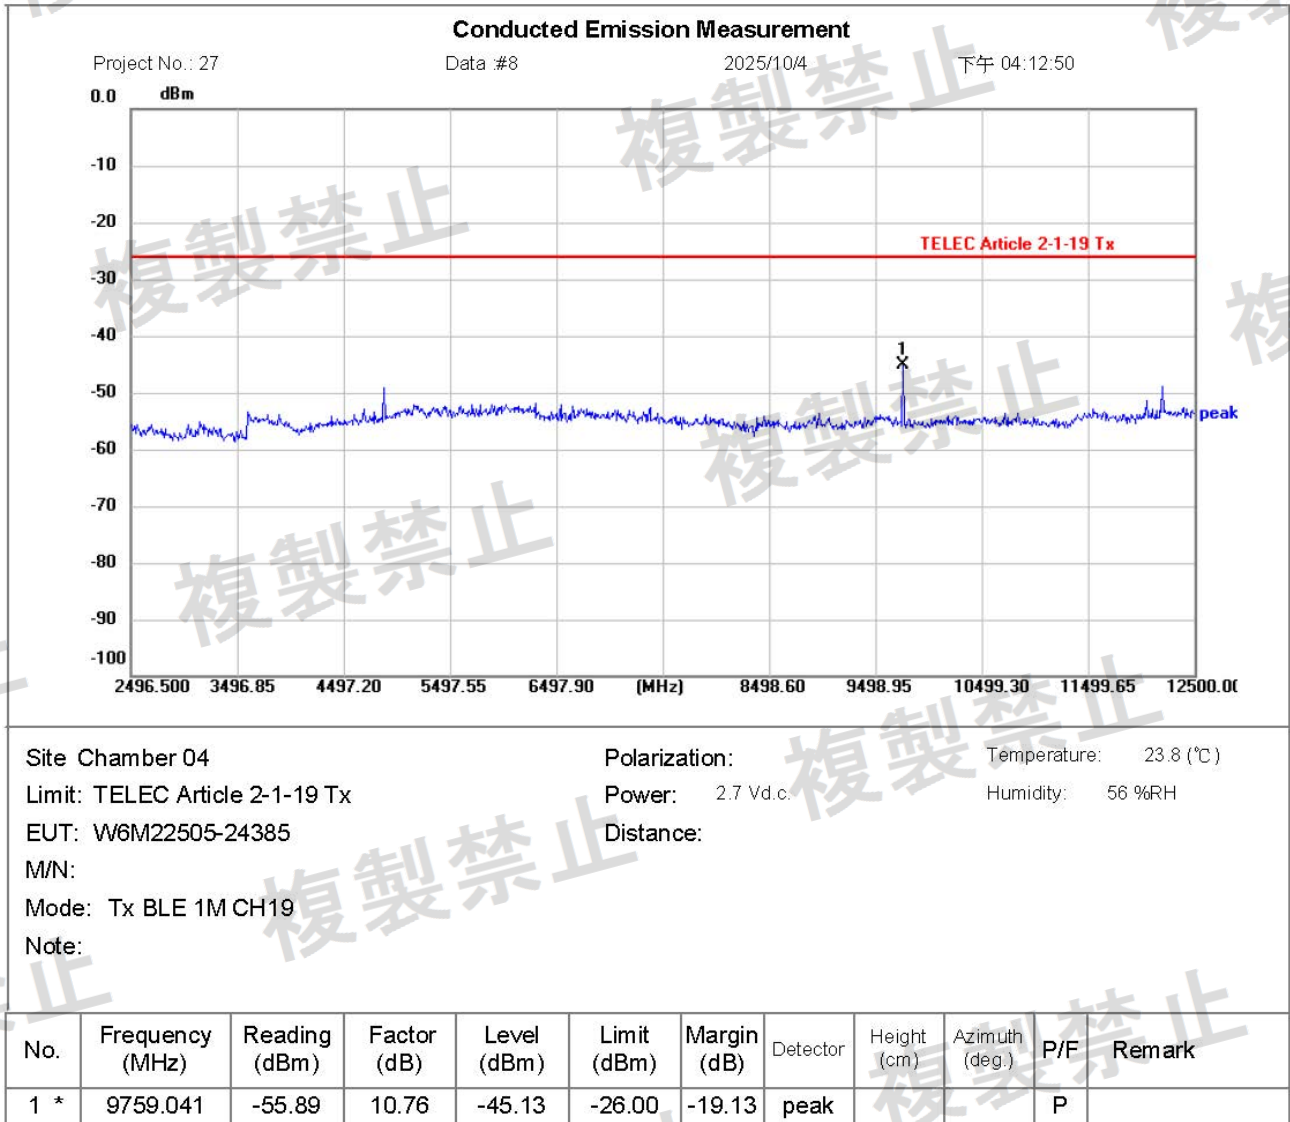



Worldwide Testing Services(Taiwan) Co., Ltd.


Conducted Emission Measurement

Project No.: 27

Data #9

2025/10/4

下午 04:13:57

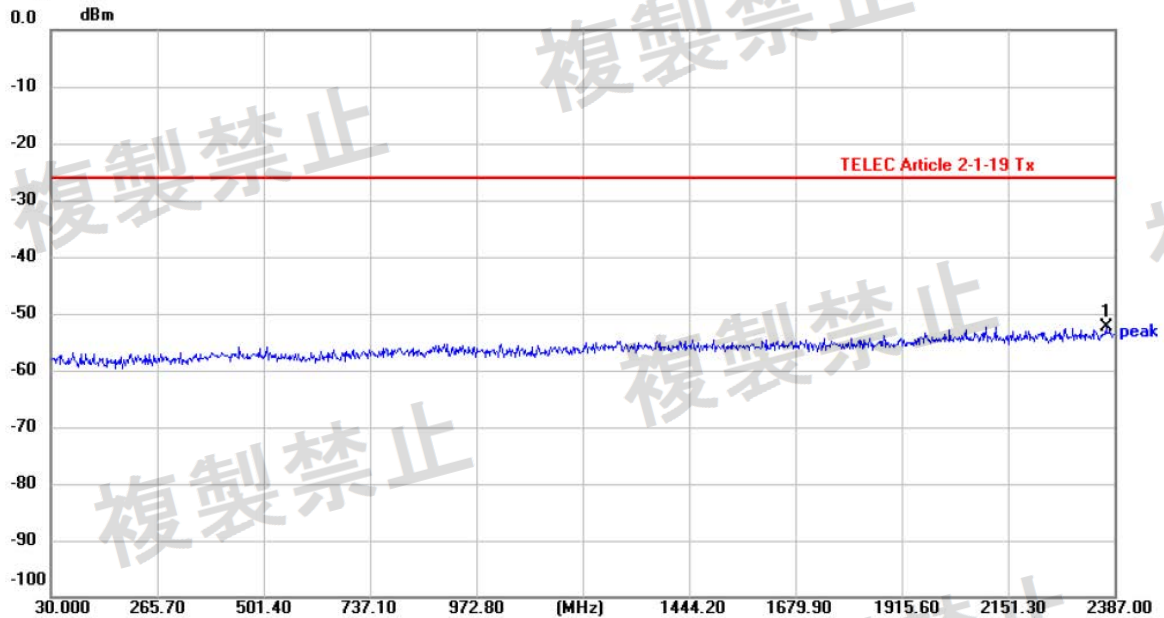

Site Chamber 04

Polarization:

Temperature: 23.8 (°C)

Limit: TELEC Article 2-1-19 Tx

Power: 2.7 Vd.c.

Humidity: 56 %RH

EUT: W6M22505-24385

Distance:

M/N:

Mode: Tx BLE 1M CH39

Note:

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1 *	2368.144	-62.79	10.35	-52.44	-26.00	-26.44	peak			P	



Worldwide Testing Services(Taiwan) Co., Ltd.


Conducted Emission Measurement

Project No.: 27

Data #10

2025/10/4

下午 04:15:29

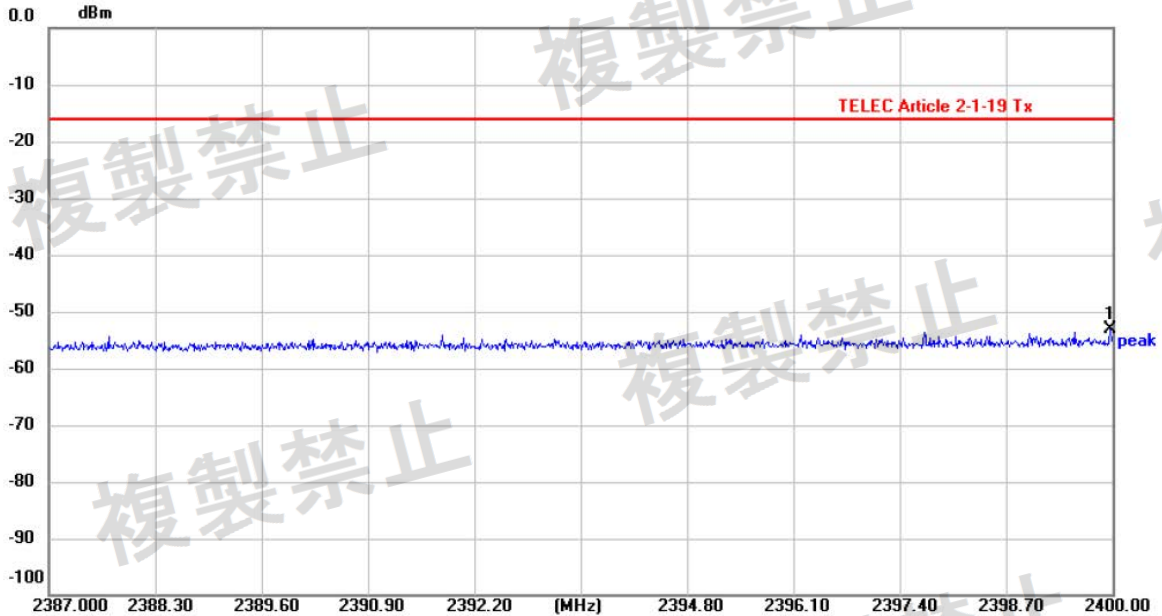

Site Chamber 04

Polarization:

Temperature: 23.8 (°C)

Limit: TELEC Article 2-1-19 Tx

Power: 2.7 Vd.c.

Humidity: 56 %RH

EUT: W6M22505-24385


Distance:

M/N:

Mode: Tx BLE 1M CH39

Note:

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1 *	2399.974	-63.59	10.36	-53.23	-16.00	-37.23	peak			P	



Worldwide Testing Services(Taiwan) Co., Ltd.


Conducted Emission Measurement

Project No.: 27

Data #11

2025/10/4

下午 04:16:40

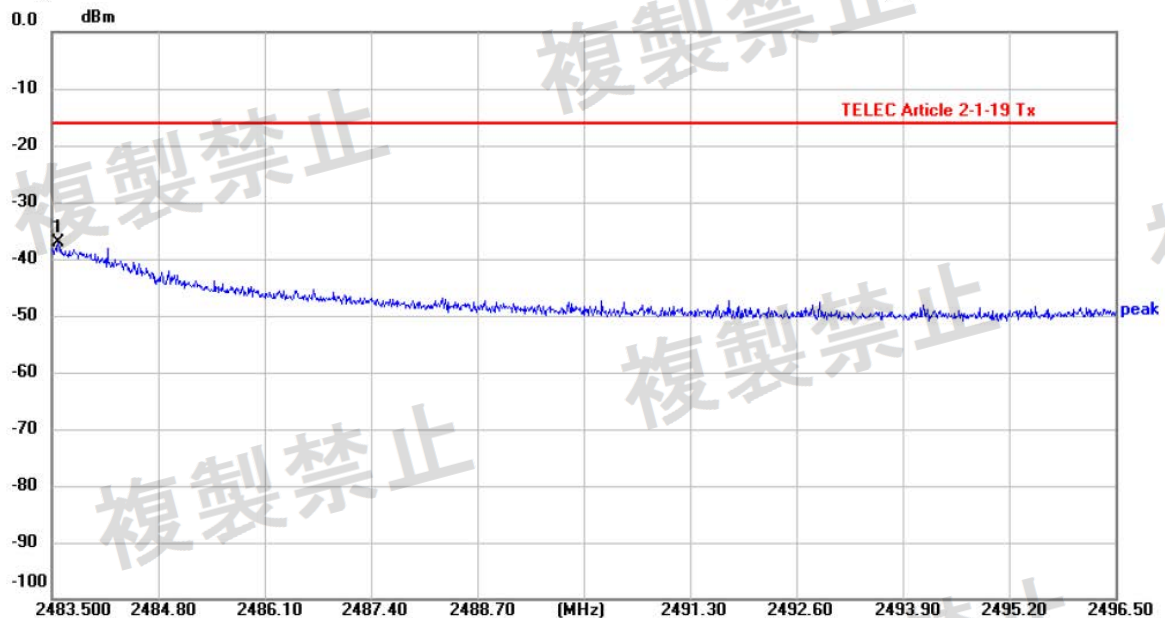

Site Chamber 04

Polarization:

Temperature: 23.8 (°C)

Limit: TELEC Article 2-1-19 Tx

Power: 2.7 Vd.c.

Humidity: 56 %RH

EUT: W6M22505-24385


Distance:

M/N:

Mode: Tx BLE 1M CH39

Note:

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1 *	2483.578	-47.57	10.36	-37.21	-16.00	-21.21	peak			P	



Worldwide Testing Services(Taiwan) Co., Ltd.


Conducted Emission Measurement

Project No.: 27

Data #12

2025/10/4

下午 04:16:56

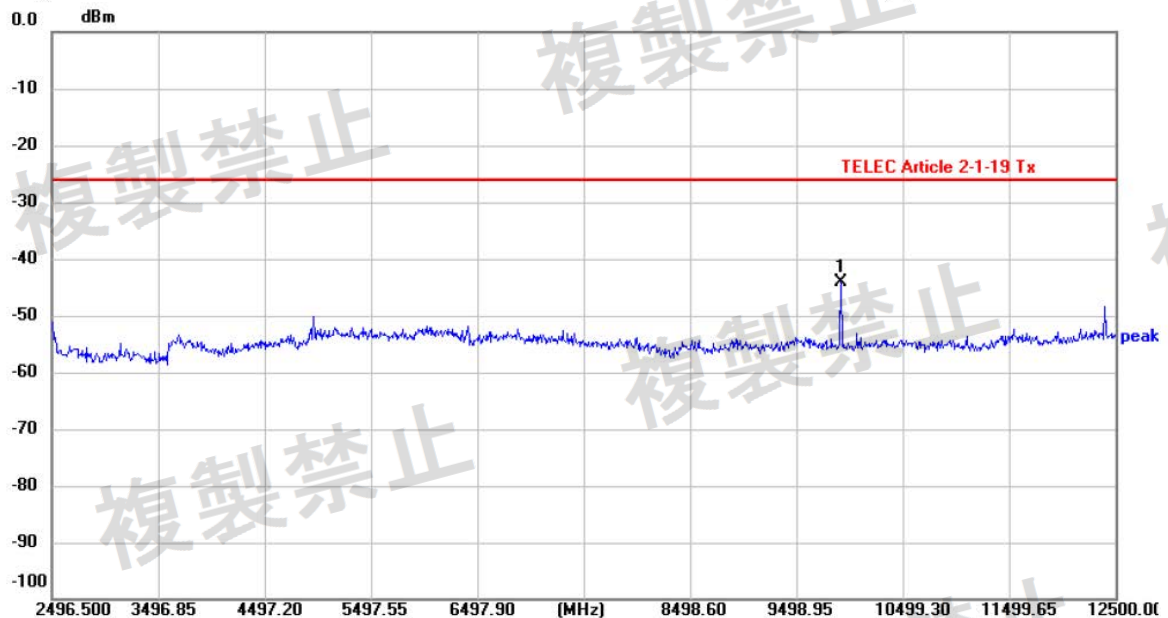

Site Chamber 04

Polarization:

Temperature: 23.8 (°C)

Limit: TELEC Article 2-1-19 Tx

Power: 2.7 Vd.c.

Humidity: 56 %RH

EUT: W6M22505-24385


Distance:

M/N:


Mode: Tx BLE 1M CH39

Note:

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1 *	9919.097	-54.83	10.79	-44.04	-26.00	-18.04	peak			P	




Worldwide Testing Services(Taiwan) Co., Ltd.

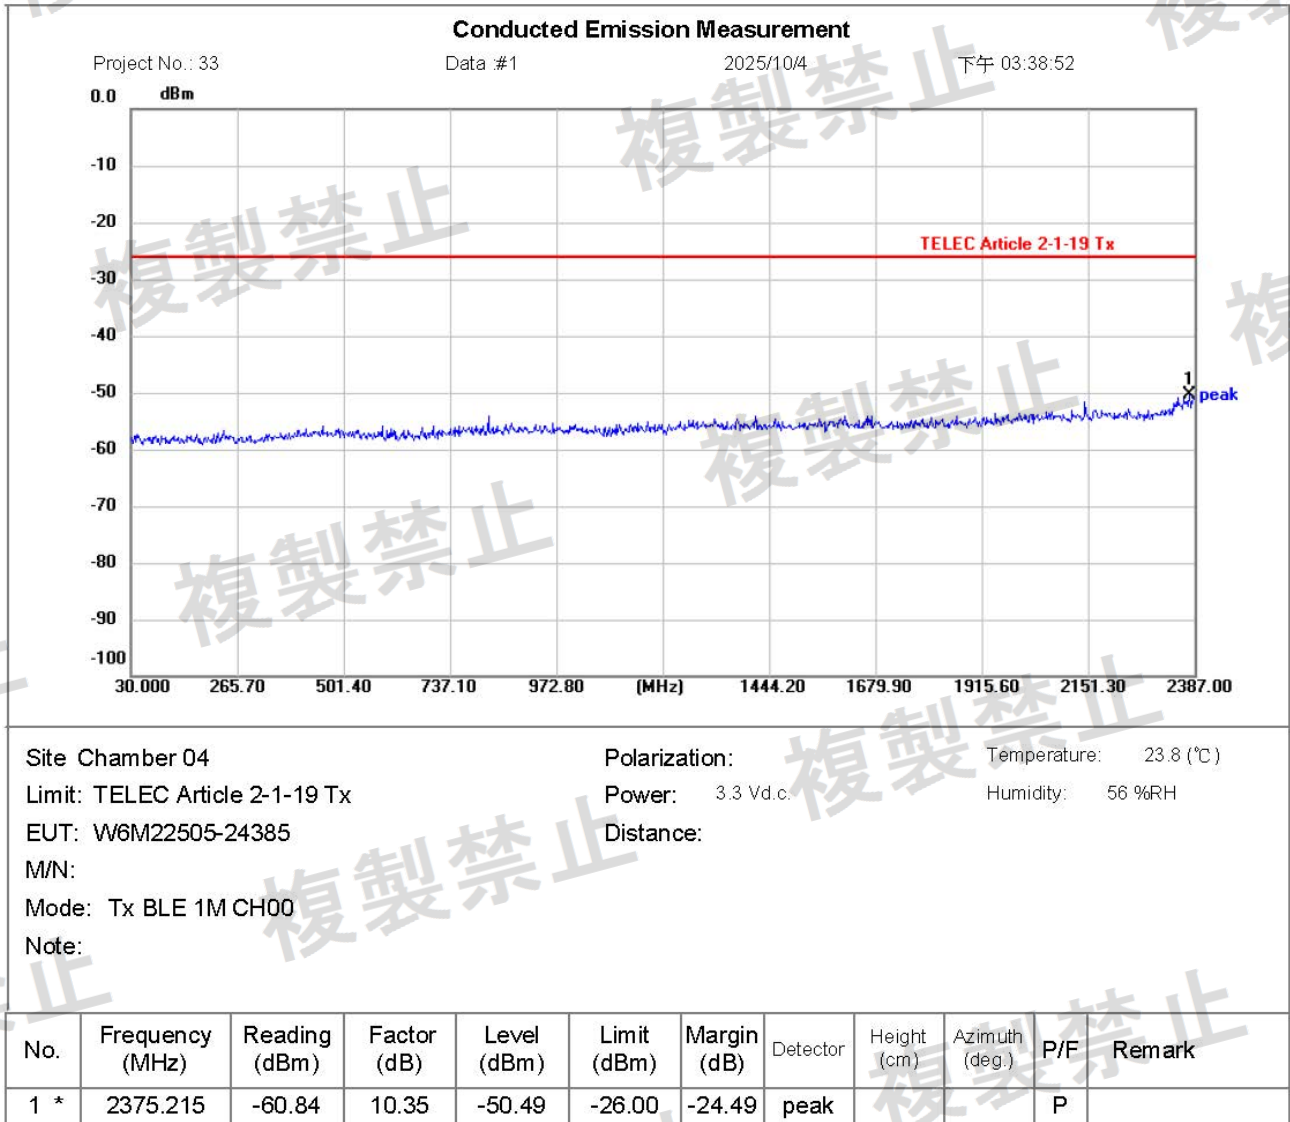




Worldwide Testing Services(Taiwan) Co., Ltd.

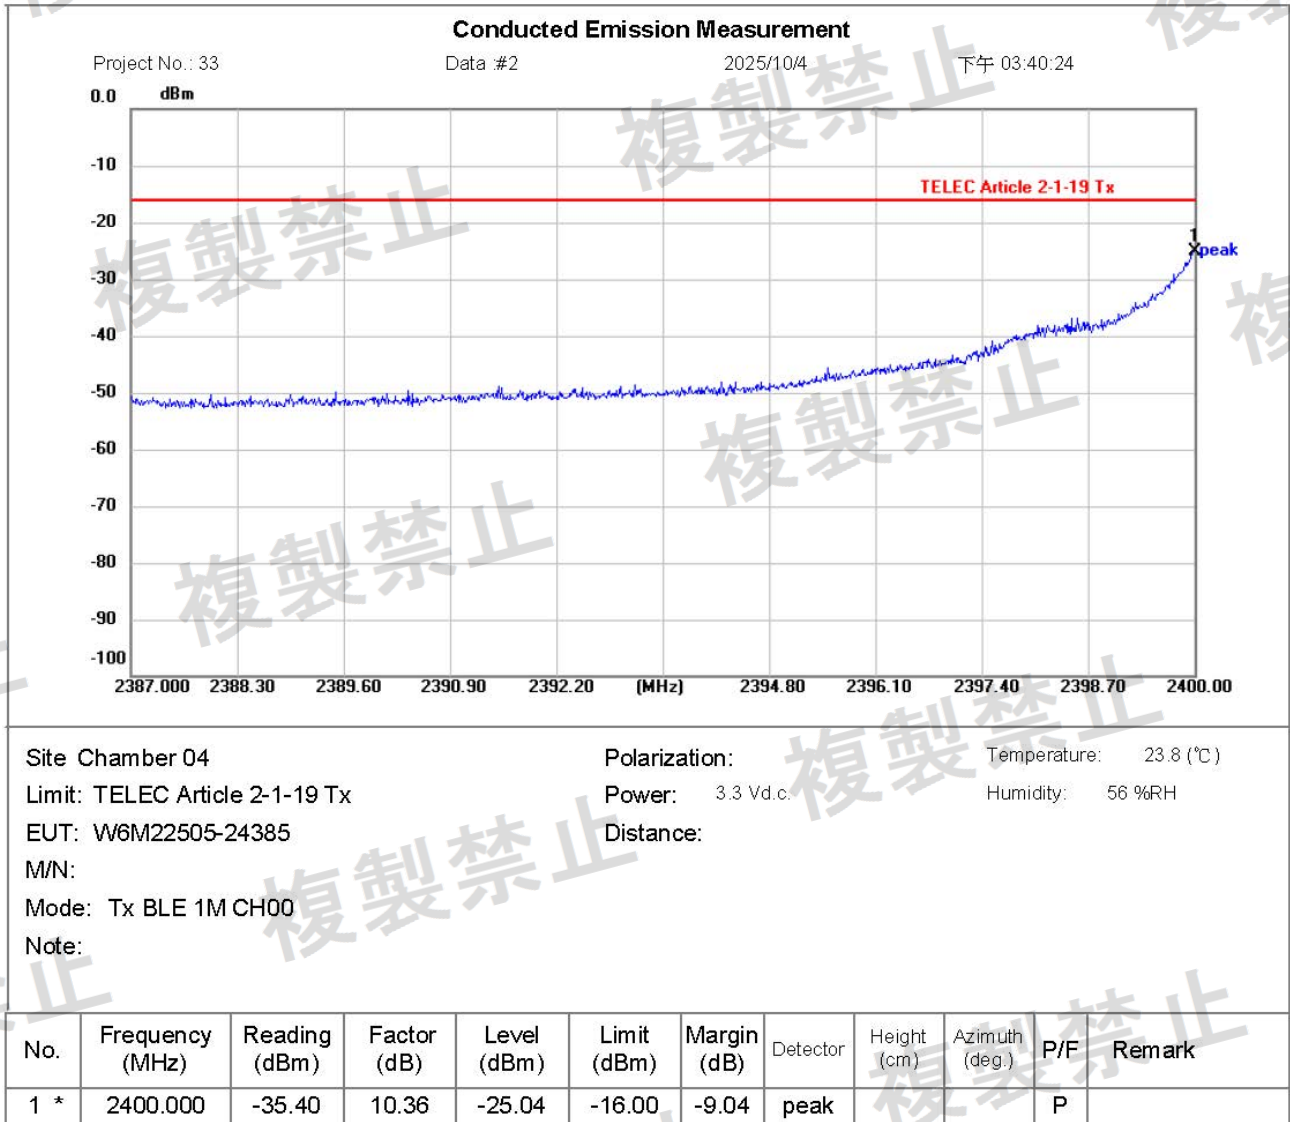





Worldwide Testing Services(Taiwan) Co., Ltd.

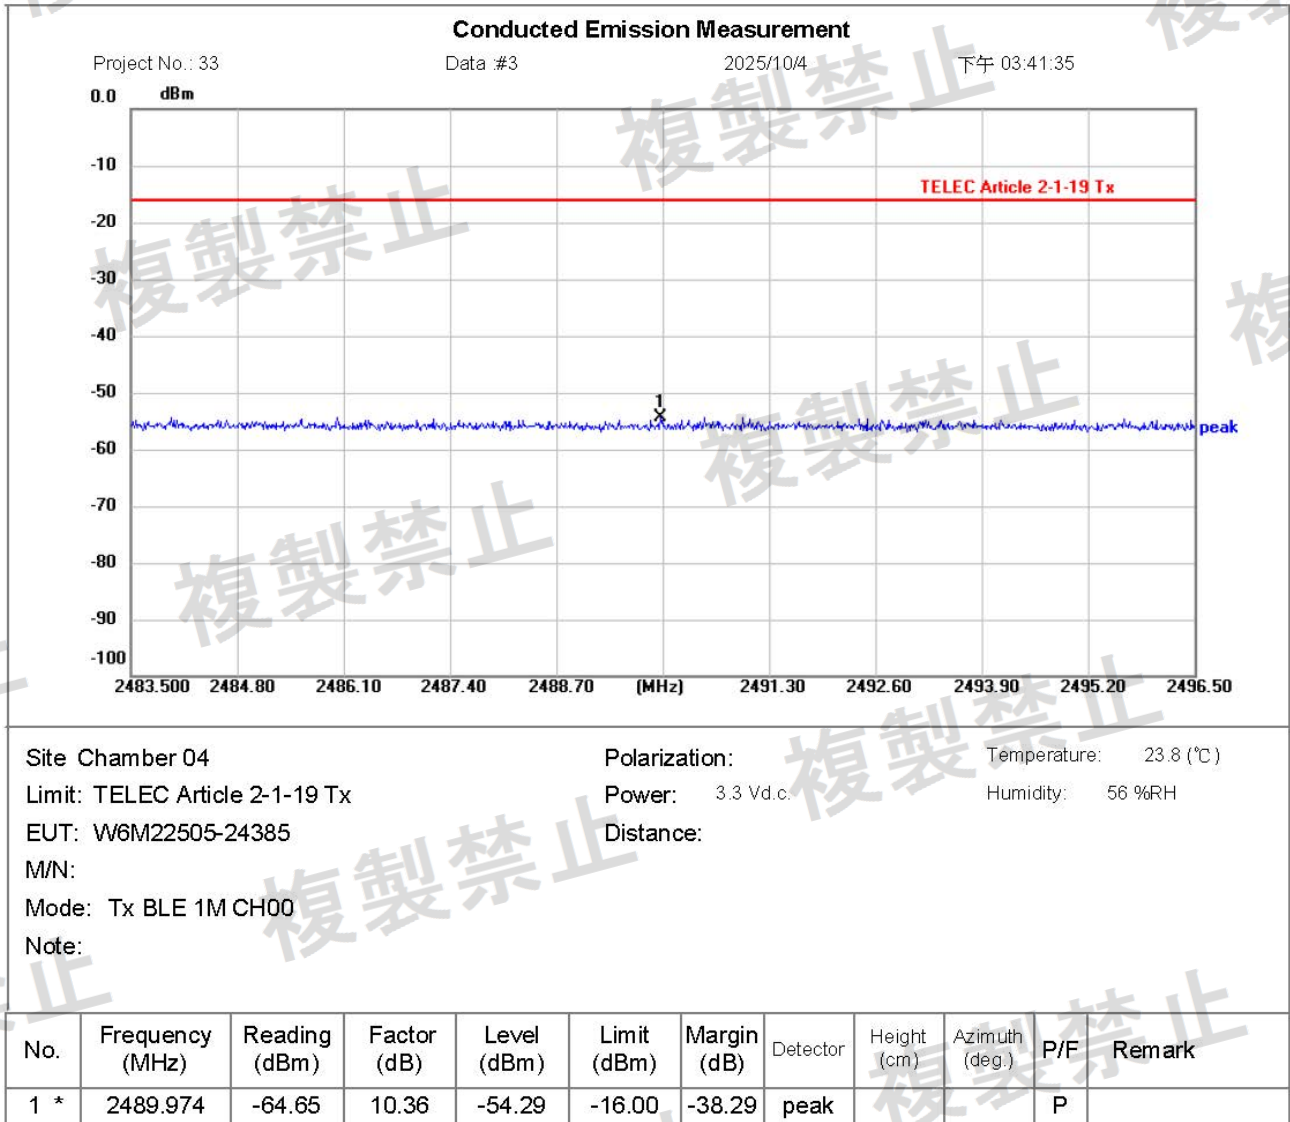




Worldwide Testing Services(Taiwan) Co., Ltd.

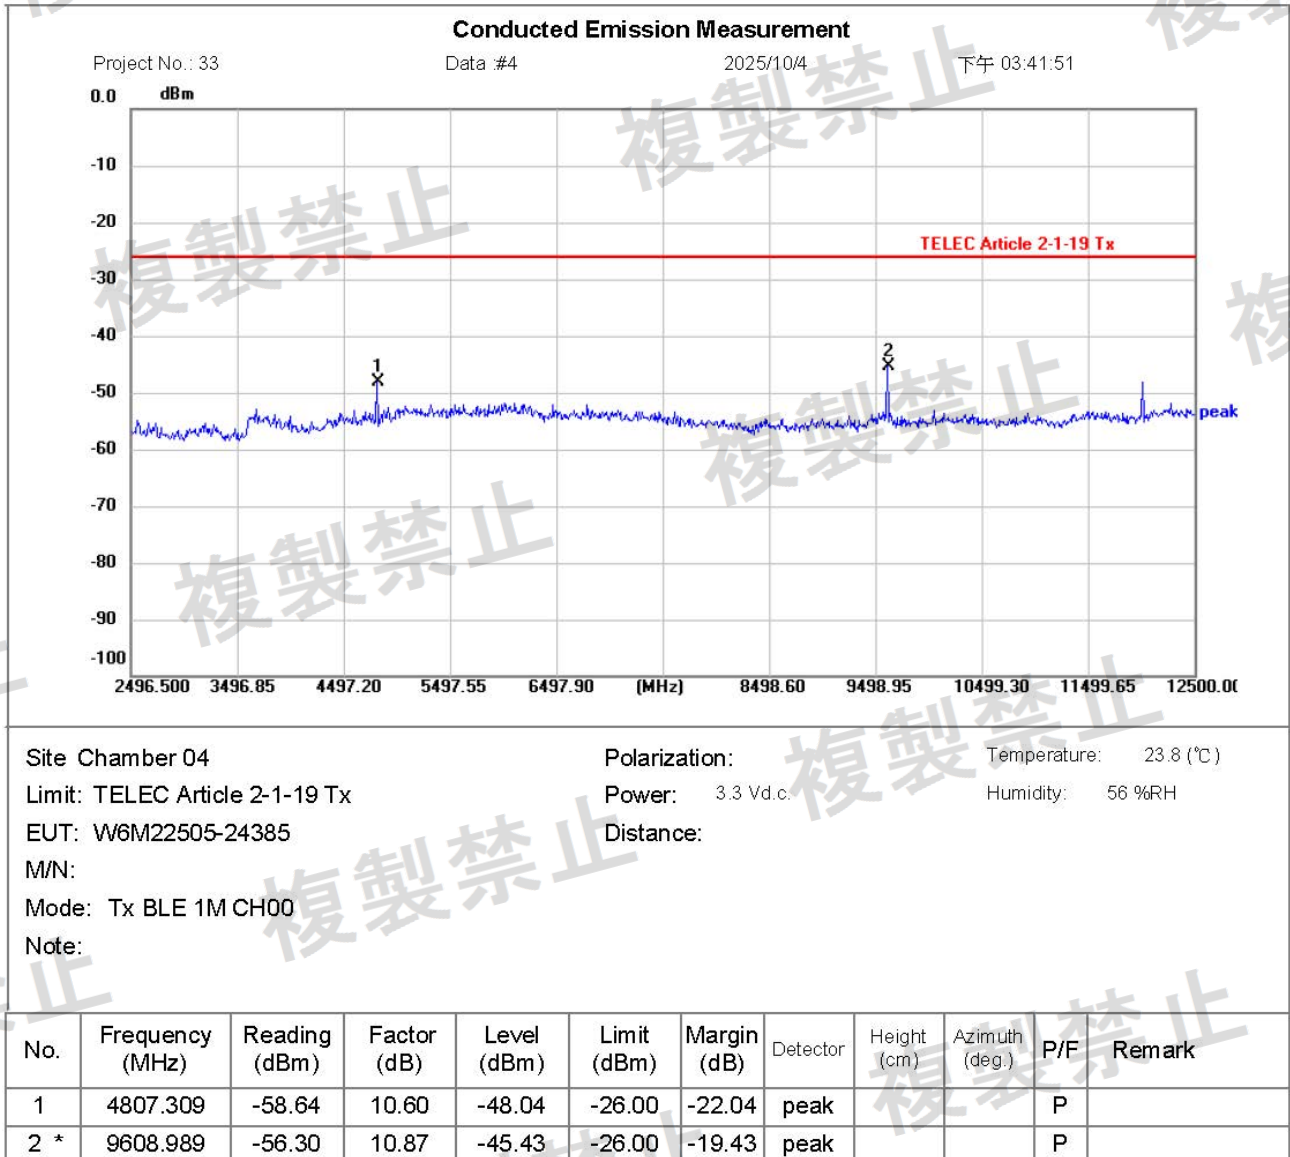



Worldwide Testing Services(Taiwan) Co., Ltd.

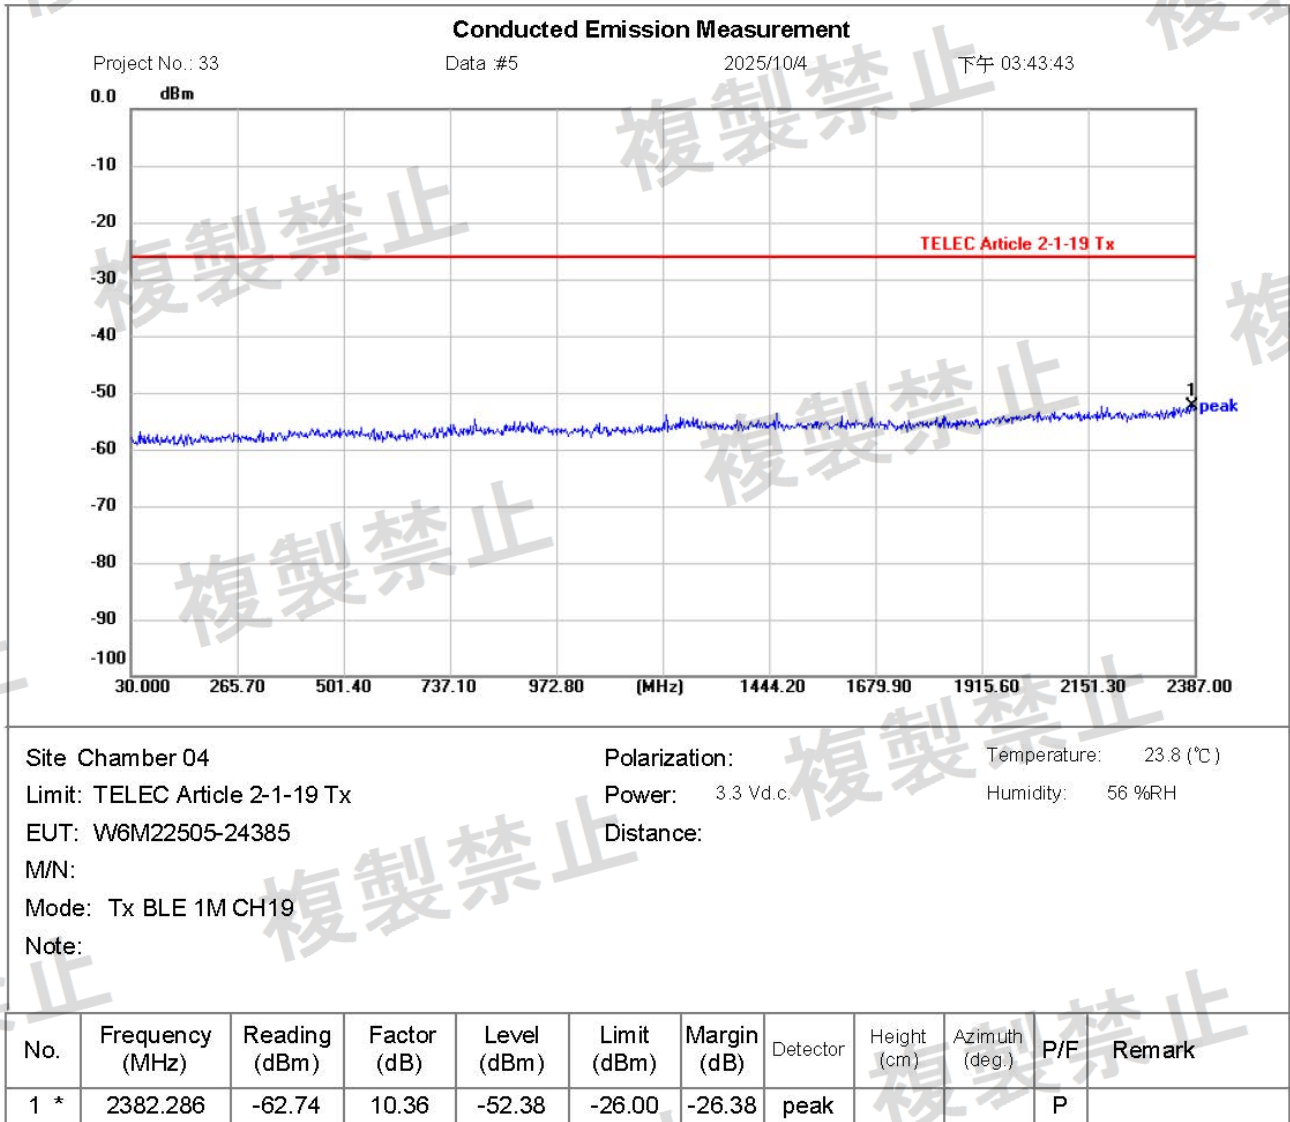



Worldwide Testing Services(Taiwan) Co., Ltd.


Conducted Emission Measurement

Project No.: 33

Data #6

2025/10/4

下午 03:45:15

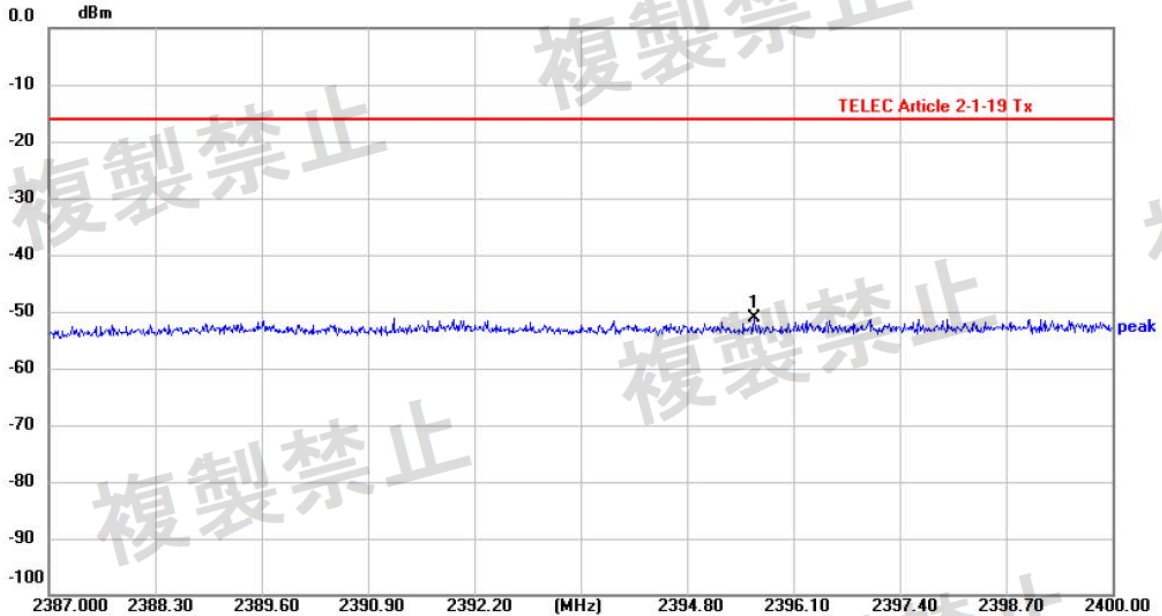

Site Chamber 04

Polarization:

Temperature: 23.8 (°C)

Limit: TELEC Article 2-1-19 Tx

Power: 3.3 Vd.c.

Humidity: 56 %RH

EUT: W6M22505-24385

Distance:

M/N:


Mode: Tx BLE 1M CH19

Note:

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1 *	2395.619	-61.52	10.36	-51.16	-16.00	-35.16	peak			P	





Worldwide Testing Services(Taiwan) Co., Ltd.

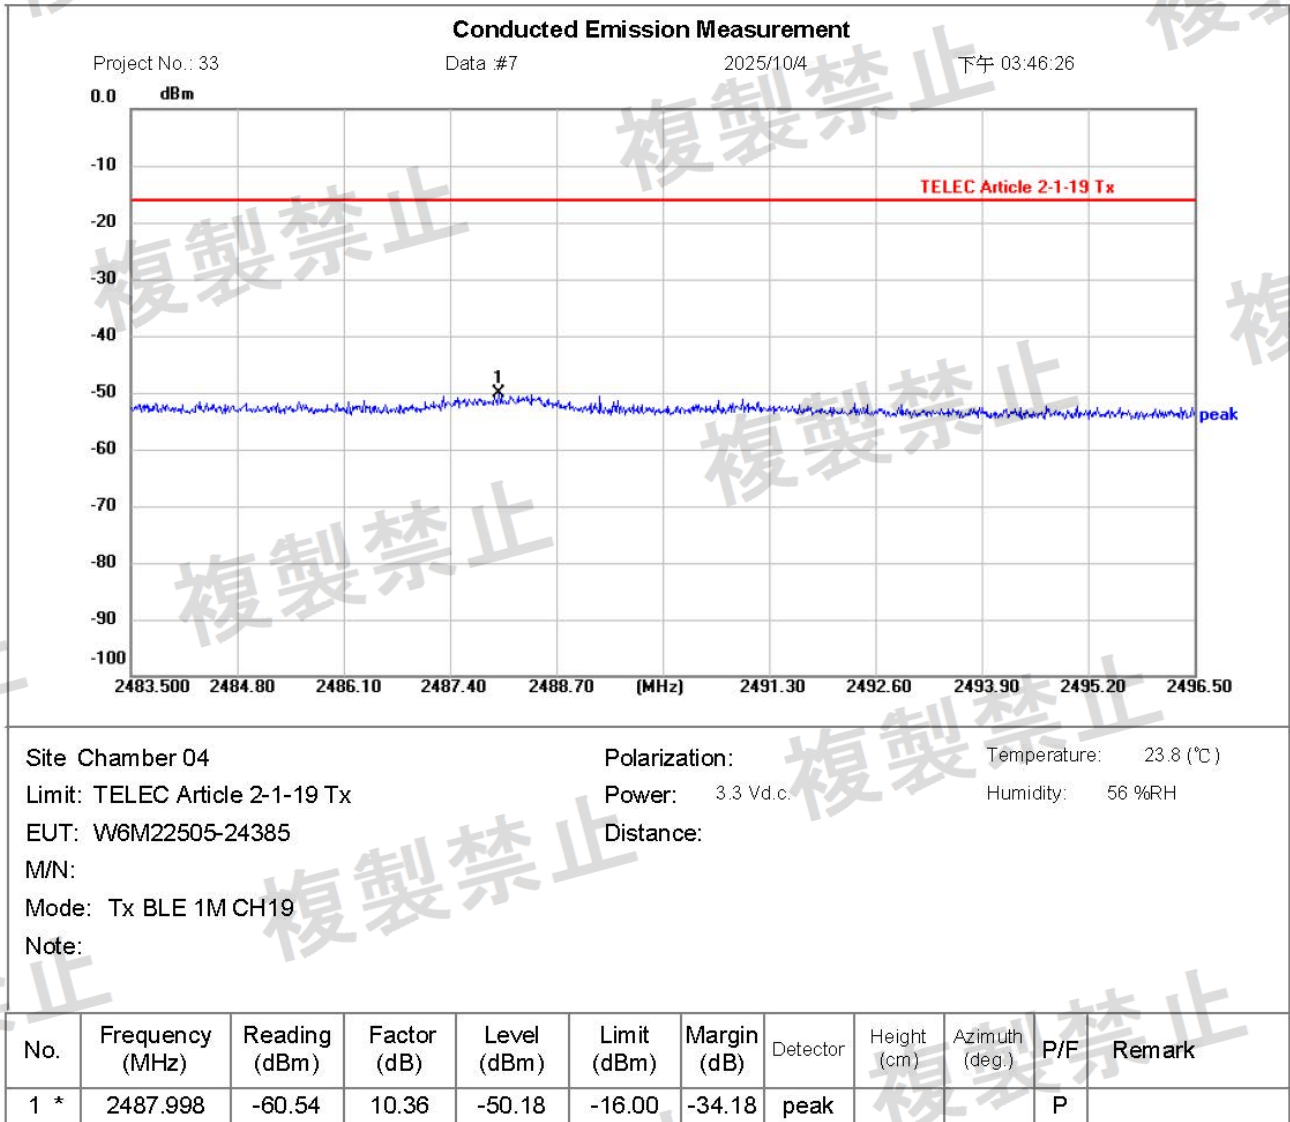




Worldwide Testing Services(Taiwan) Co., Ltd.

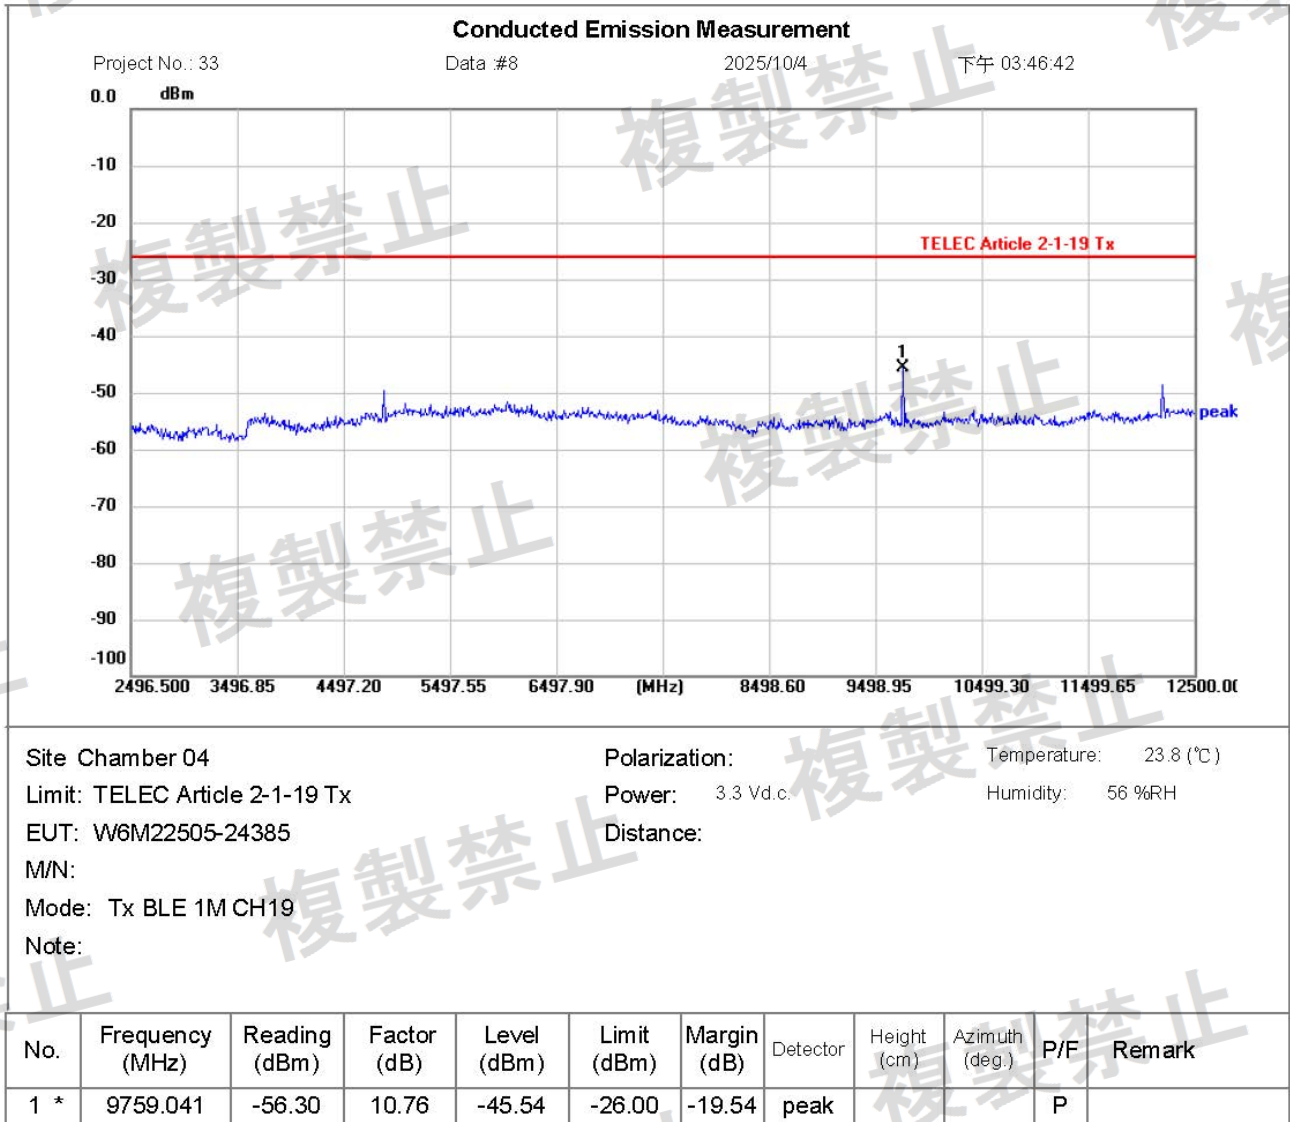





Worldwide Testing Services(Taiwan) Co., Ltd.

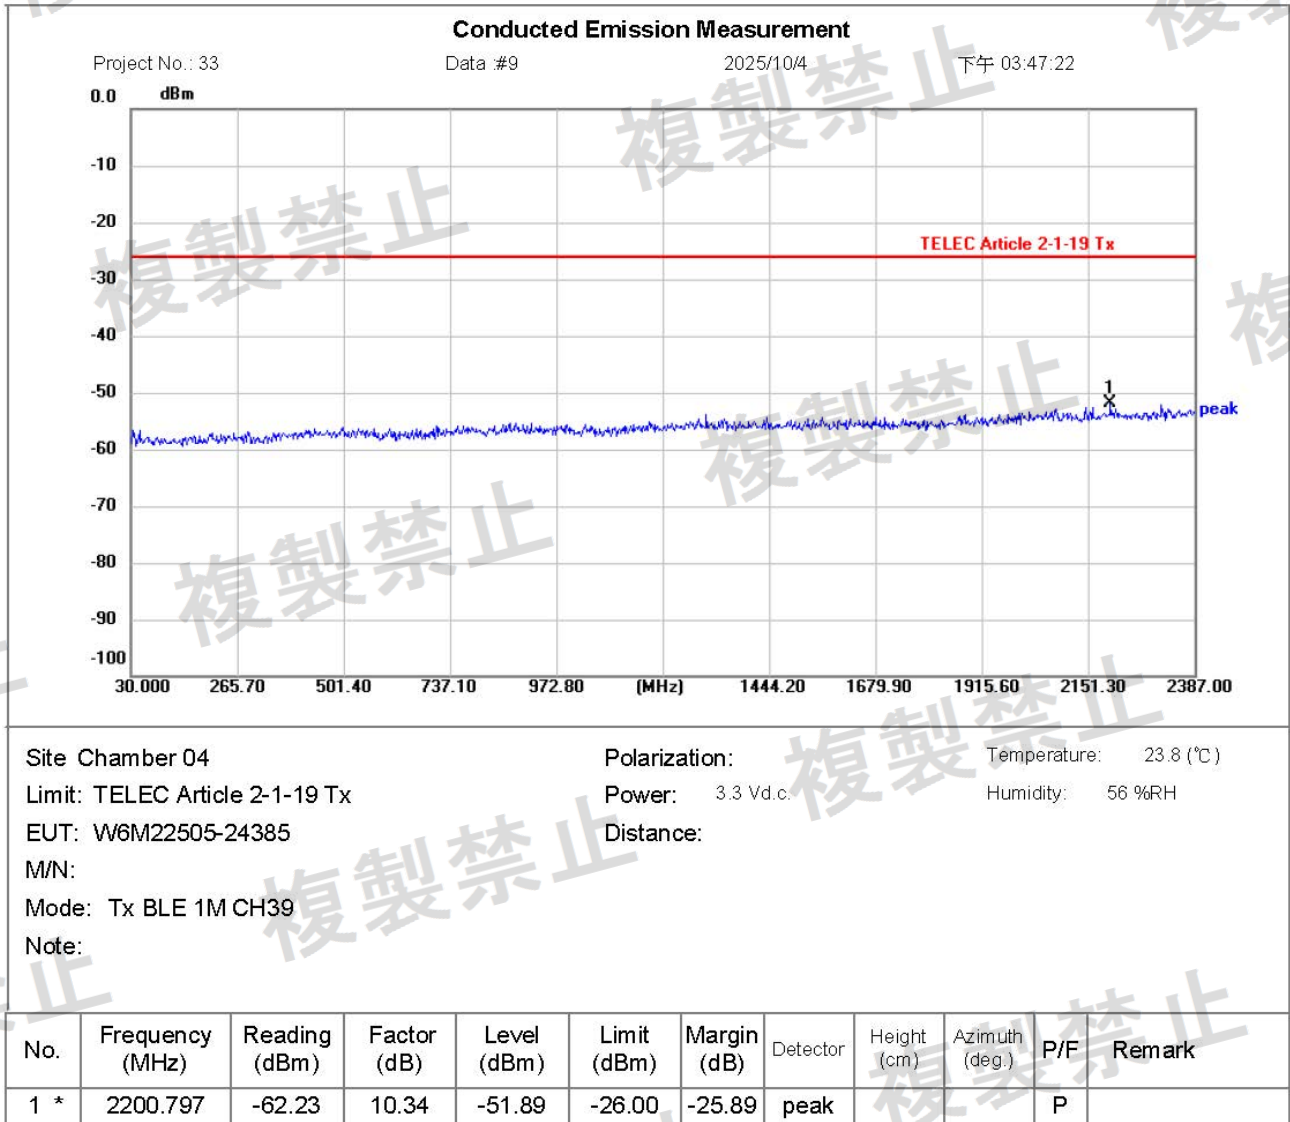





Worldwide Testing Services(Taiwan) Co., Ltd.

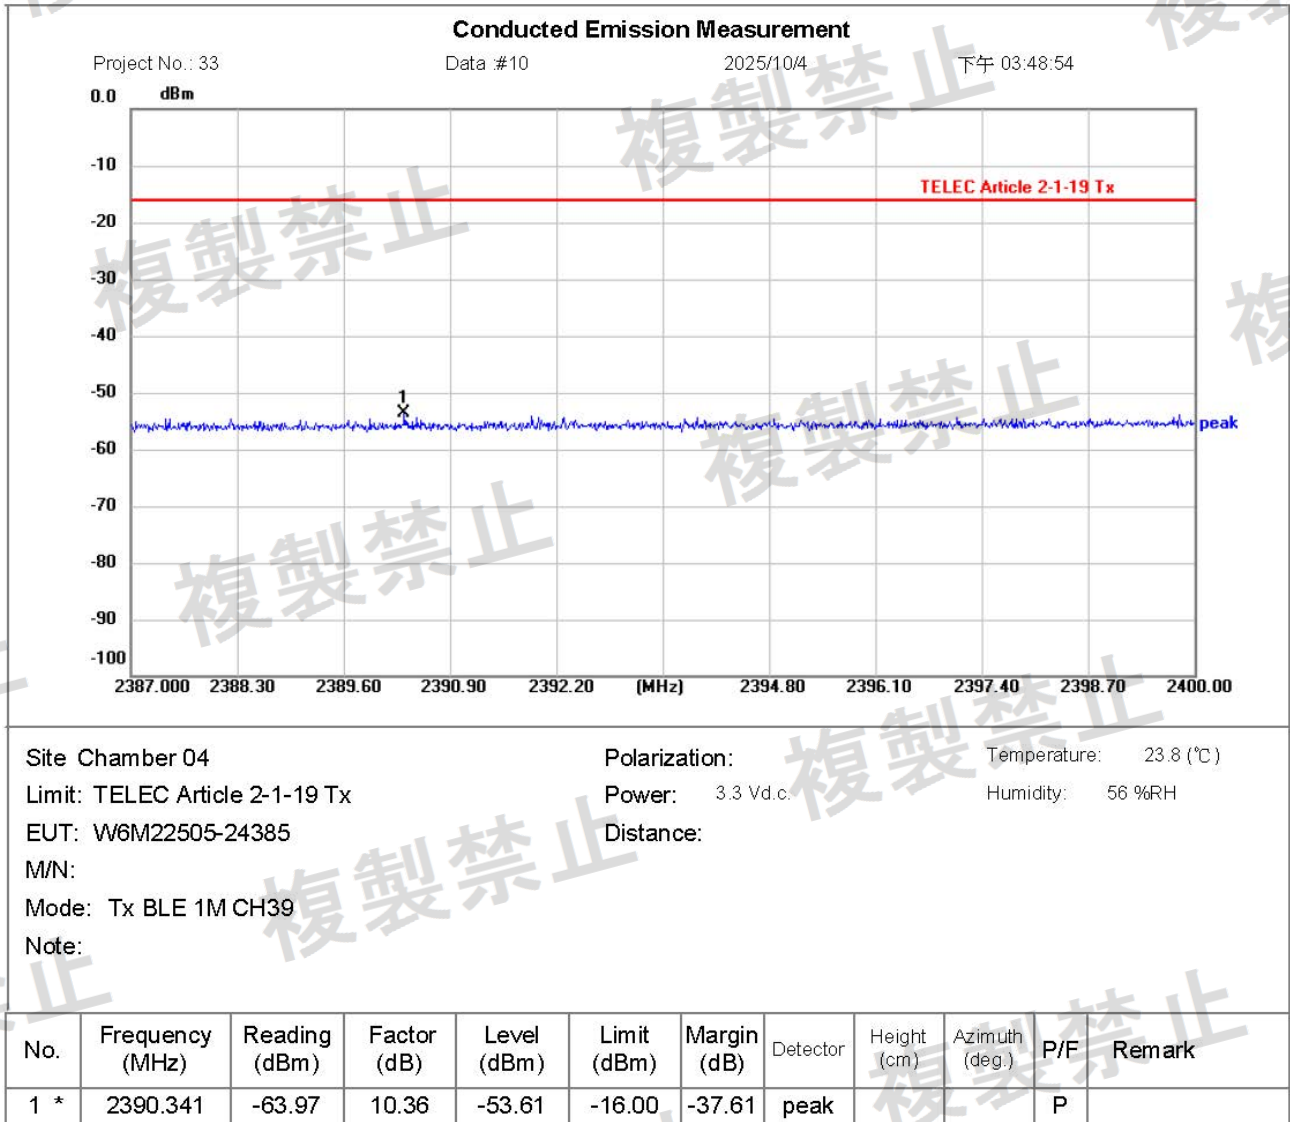




Worldwide Testing Services(Taiwan) Co., Ltd.

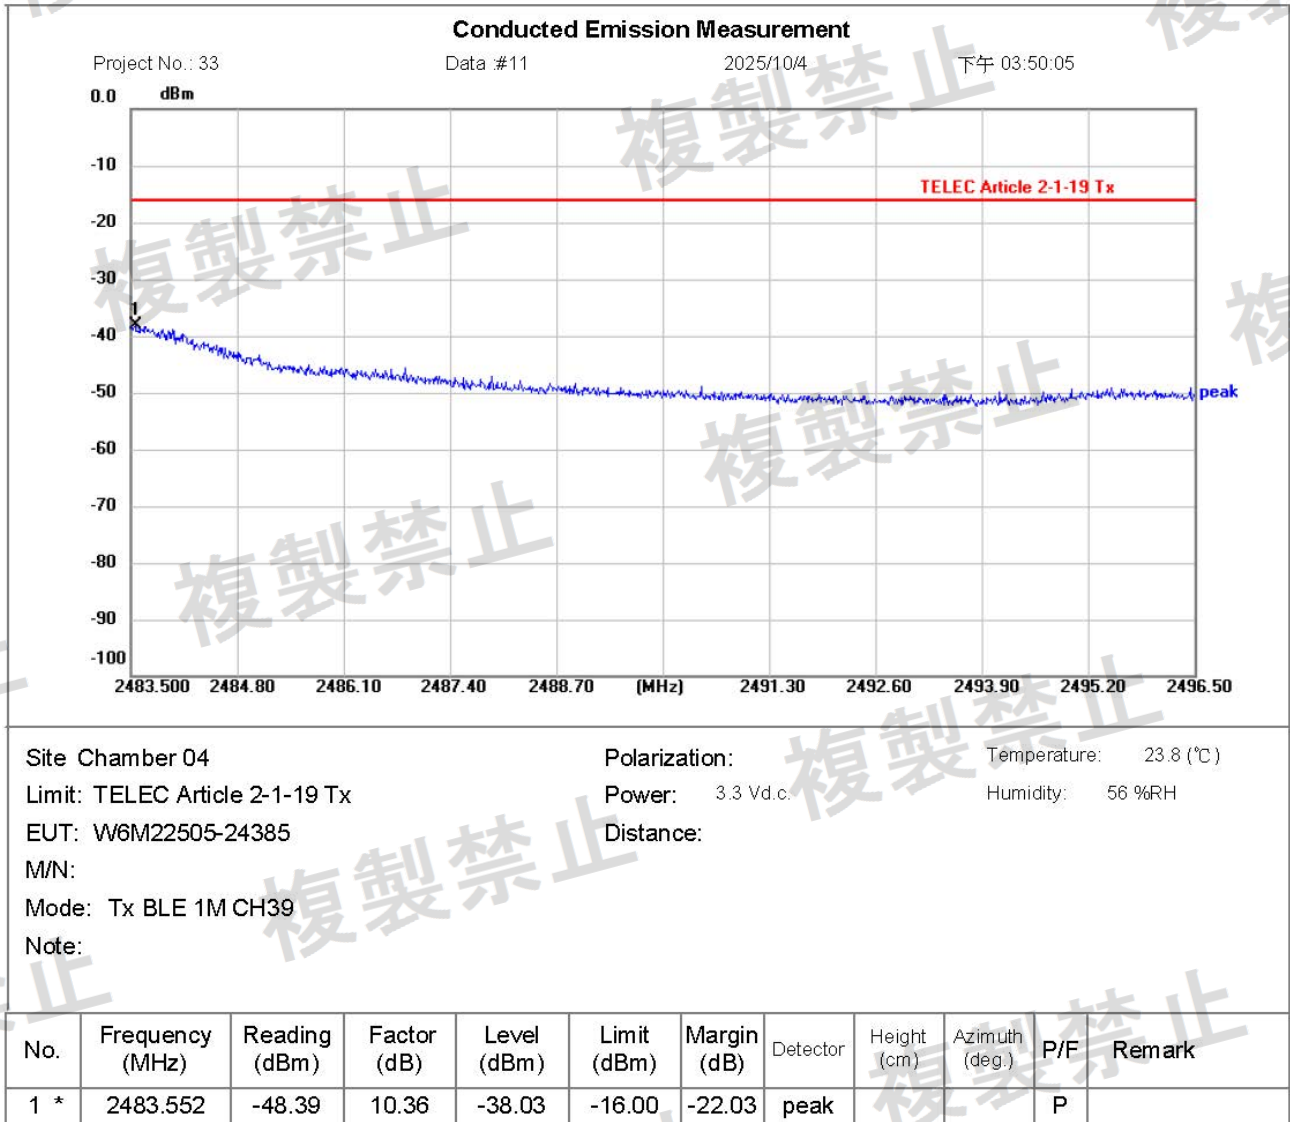




Worldwide Testing Services(Taiwan) Co., Ltd.

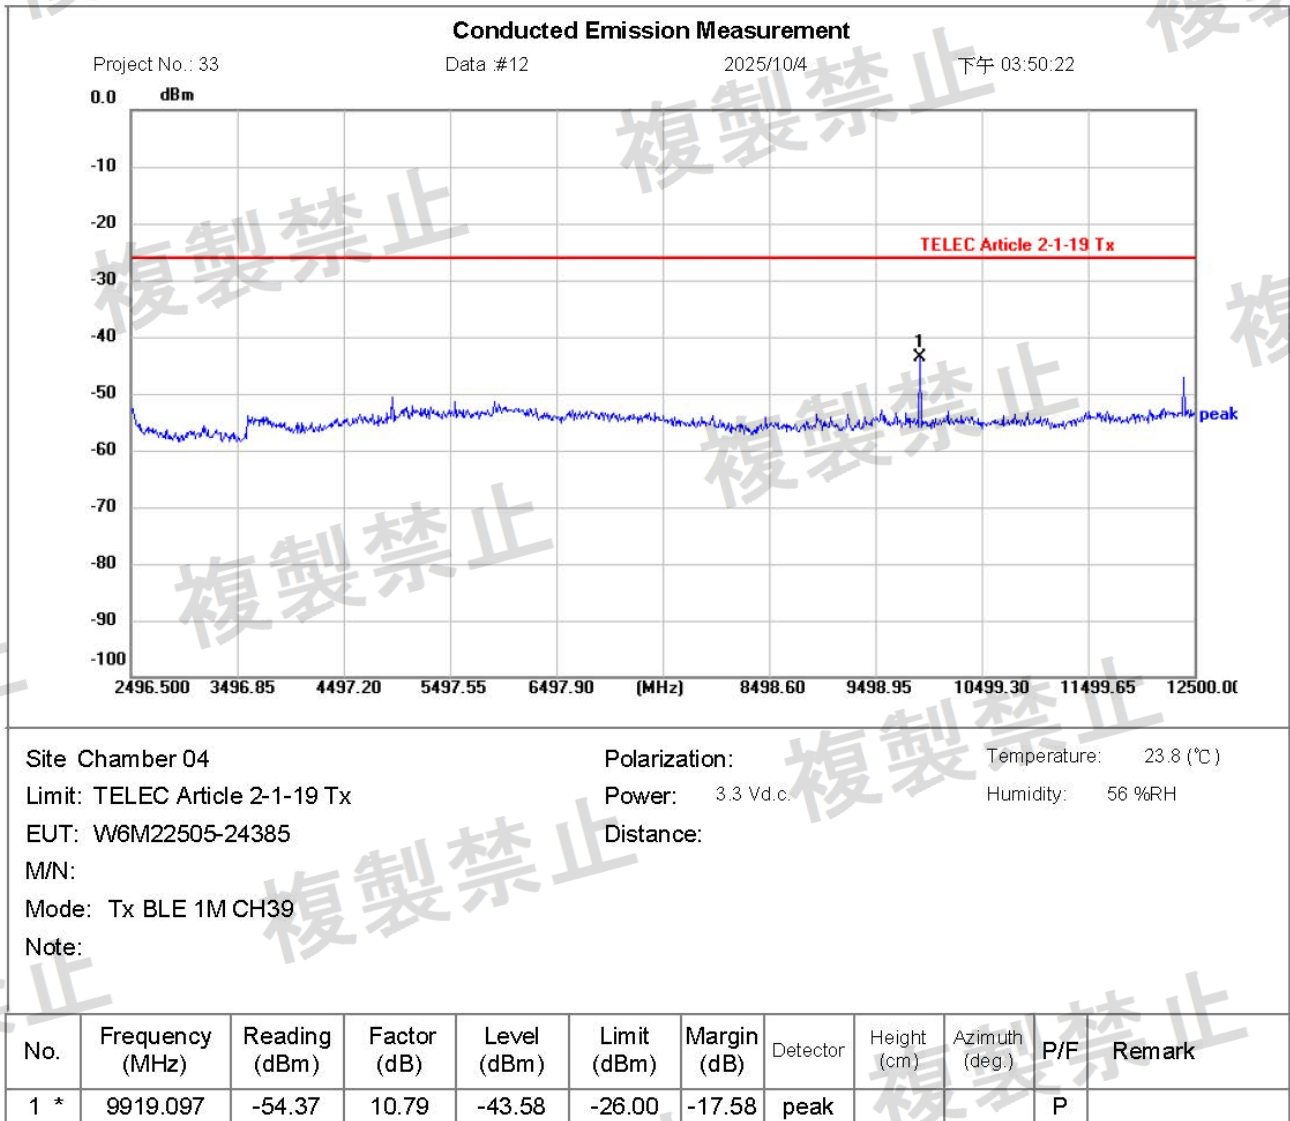

Explanation: ./.

Limits:

Transmitting operating	Operating frequency 2400 – 2483 MHz: Below 2387MHz : 2.5µW/MHz (-26 dBm) 2387 to 2400MHz : 25µW/MHz (-16 dBm) 2483.5 through 2496.5MHz : 25µW/MHz (-16 dBm) Over 2496.5MHz : 2.5µW/MHz (-16 dBm)
------------------------	--



Worldwide Testing Services(Taiwan) Co., Ltd.

30MHz-2387MHz

1. The measurement use RBW = 1 MHz, VBW = 1 MHz
2. The unit is dBm/MHz for the Reading, the Result, and the Limit.
3. Correction Factor = Attenuator + Cable loss
4. The formula of measured value as: Test Result = Reading + Correction Factor
5. Line: PK Limit Line.

2387MHz-2400MHz


1. The measurement use RBW = 1 MHz, VBW = 1 MHz
2. The unit is dBm/MHz for the Reading, the Result, and the Limit.
3. Correction Factor = Attenuator + Cable loss
4. The formula of measured value as: Test Result = Reading + Correction Factor
5. Line: PK Limit Line.

2483.5MHz-2496.5MHz

1. The measurement use RBW = 1 MHz, VBW = 1 MHz
2. The unit is dBm/MHz for the Reading, the Result, and the Limit.
3. Correction Factor = Attenuator + Cable loss
4. The formula of measured value as: Test Result = Reading + Correction Factor
5. Line: PK Limit Line.

2496.5MHz-12500MHz

1. The measurement use RBW = 1 MHz, VBW = 1 MHz
2. The unit is dBm/MHz for the Reading, the Result, and the Limit.
3. Correction Factor = Attenuator + Cable loss
4. The formula of measured value as: Test Result = Reading + Correction Factor
5. Line: PK Limit Line.



Worldwide Testing Services(Taiwan) Co., Ltd.

3.6 Antenna Power

Test date: October 04, 2025

Temperature: 24.1 °C

Humidity: 56.0 %

Tester: Sora


Mode	Power (mW)			Limit (mW)
	Vmin	Vnor	Vmax	
BLE 1M	4.15	4.14	4.13	10
	4.18	4.16	4.18	10
	4.07	4.07	4.08	10

Tolerance based on rated output power 10 mW	
4.18 mW	-58.20 %
4.07 mW	-59.30 %

Explanation: ./.

Limits:

Under all test conditions	Conducted	(1) FH, FH+DS, FH+OFDM 3mW/MHz (used in the range of 2427 - 2470.75MHz) (2) Other than (1) of OFDM & DS : 10mW/MHz (3) Other than (1) & (2) : 10mW Tolerance: +20%/No lower limit
---------------------------	-----------	---



Worldwide Testing Services(Taiwan) Co., Ltd.

3.7 E.I.R.P.

A represents the value determined by dividing an equivalent isotropically radiated power by the value obtained by applying an antenna power with the mean power of 10 mW to the transmitting antenna with its absolute gain being 2.14 dBi, and shall be 1 when it is lower than 1.


Test date: October 04, 2025

Temperature: 24.1 °C


Humidity: 56.0 %

Tester: Sora

Mode	Channel	Power (dBm)			Antenna gain (dBi)	EIRP (dBm)	Limit (dBm)
		Vmin	Vnor	Vmax			
BLE 1M	Ch 0 : 2402 MHz	6.18	6.17	6.16	-2.86508	3.31492	12.14
	Ch 19 : 2440 MHz	6.21	6.19	6.21	-2.86508	3.34492	12.14
	Ch 39 : 2480 MHz	6.10	6.10	6.11	-2.86508	3.24492	12.14



3.8 Spurious emission receiver

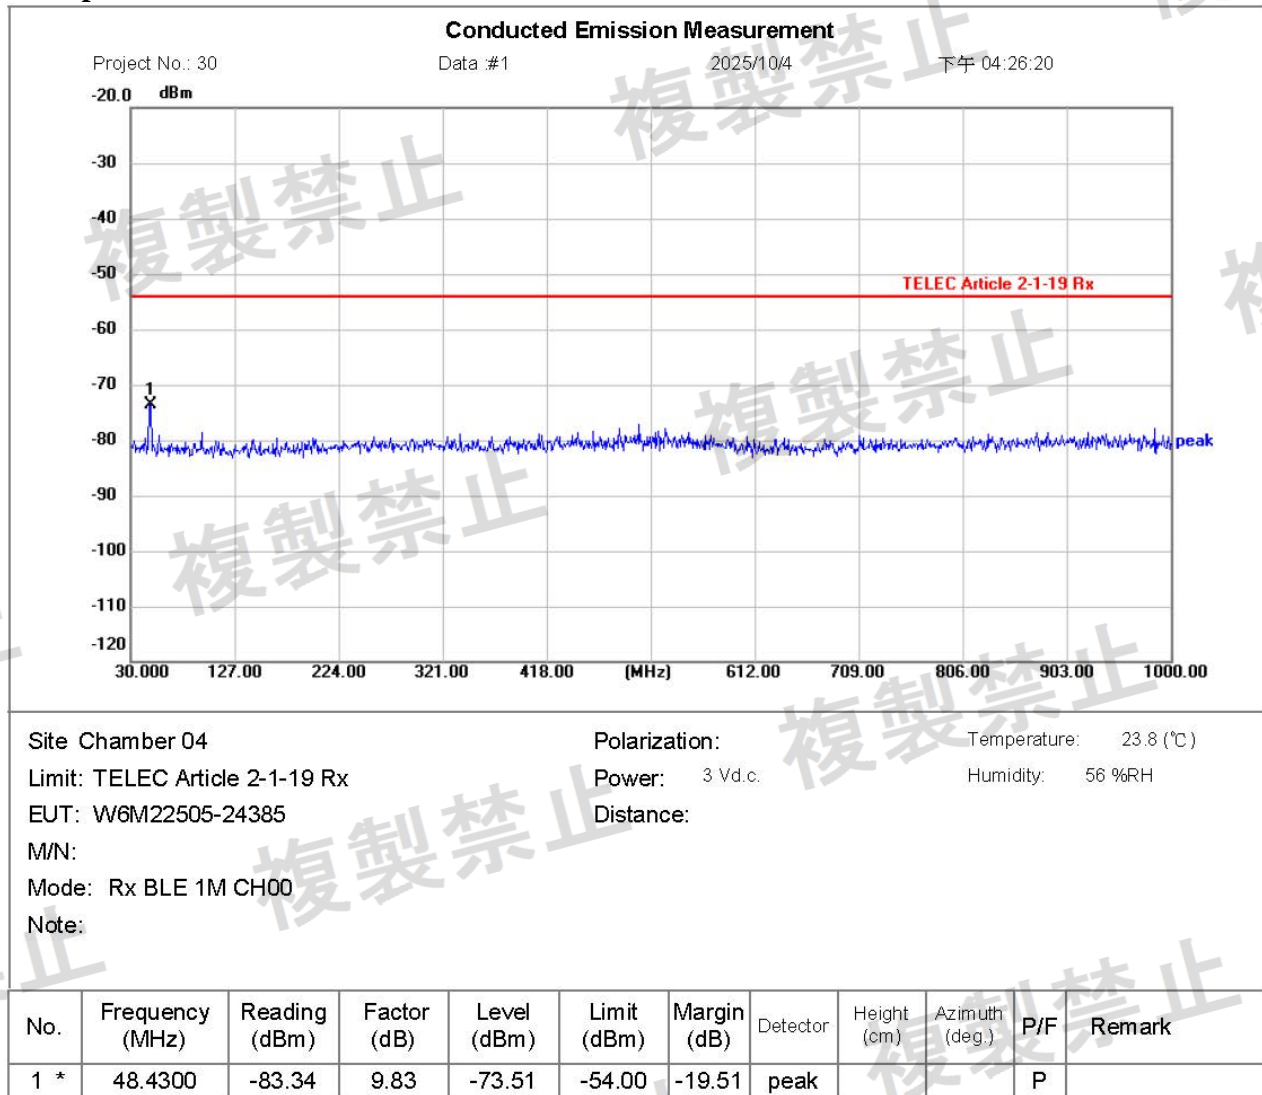



Worldwide Testing Services(Taiwan) Co., Ltd.

