


Site: AC1	Time: 2019/02/28 - 02:02
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AC1300 MU-MIMO 迷你 USB 無線網卡	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11g at Channel 2417MHz, Ant 0	

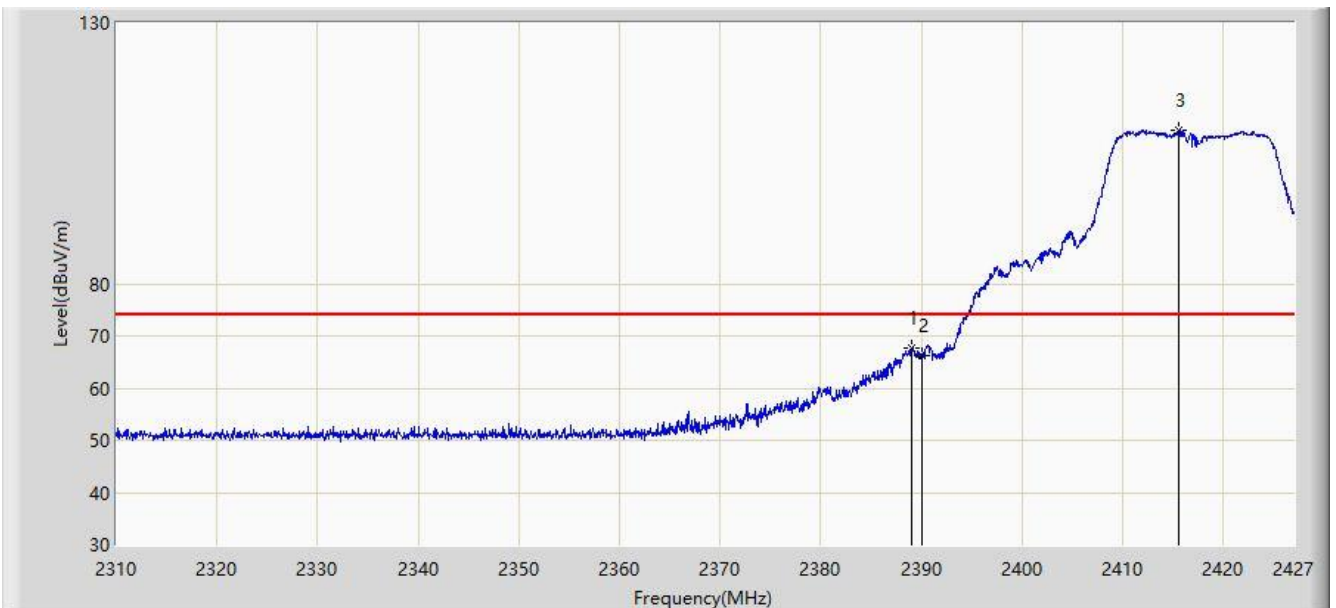


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2388.975	67.595	69.434	-6.405	74.000	-1.839	PK
2			2390.000	66.361	68.203	-7.639	74.000	-1.842	PK
3		*	2415.534	109.444	111.376	N/A	N/A	-1.932	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/02/28 - 02:05
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AC1300 MU-MIMO 迷你 USB 無線網卡	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11g at Channel 2417MHz, Ant 0	

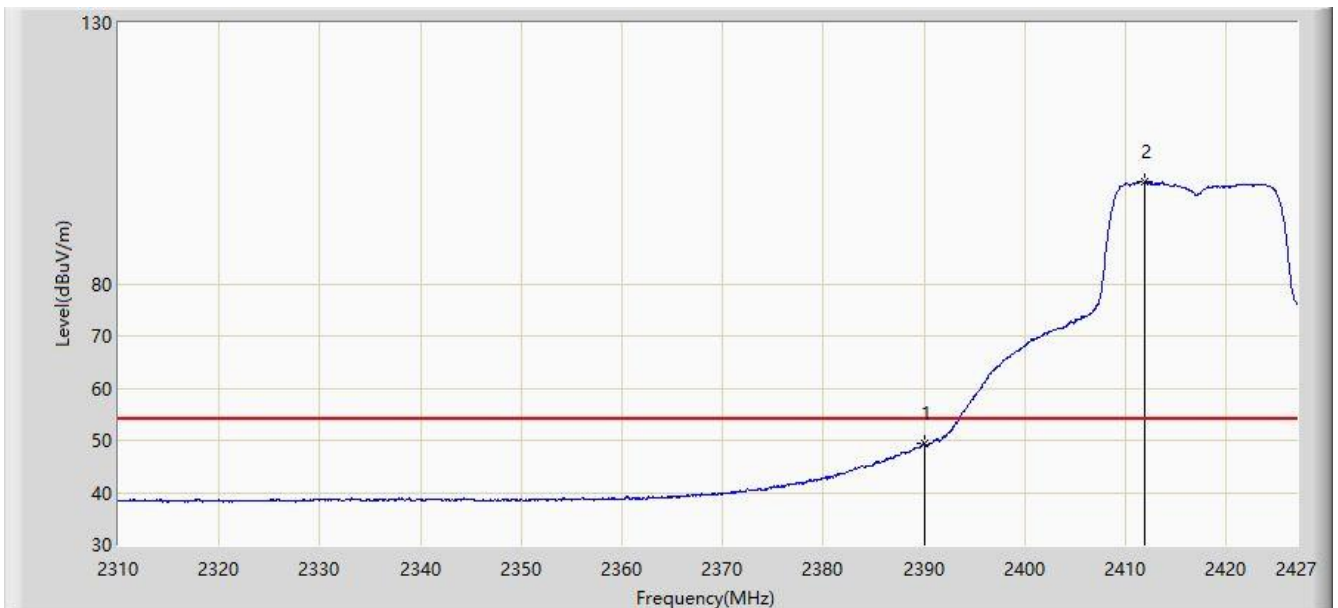


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	49.371	51.213	-4.629	54.000	-1.842	AV
2		*	2411.848	99.473	101.390	N/A	N/A	-1.917	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/02/28 - 02:15
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AC1300 MU-MIMO 迷你 USB 無線網卡	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11g at Channel 2422MHz, Ant 0	

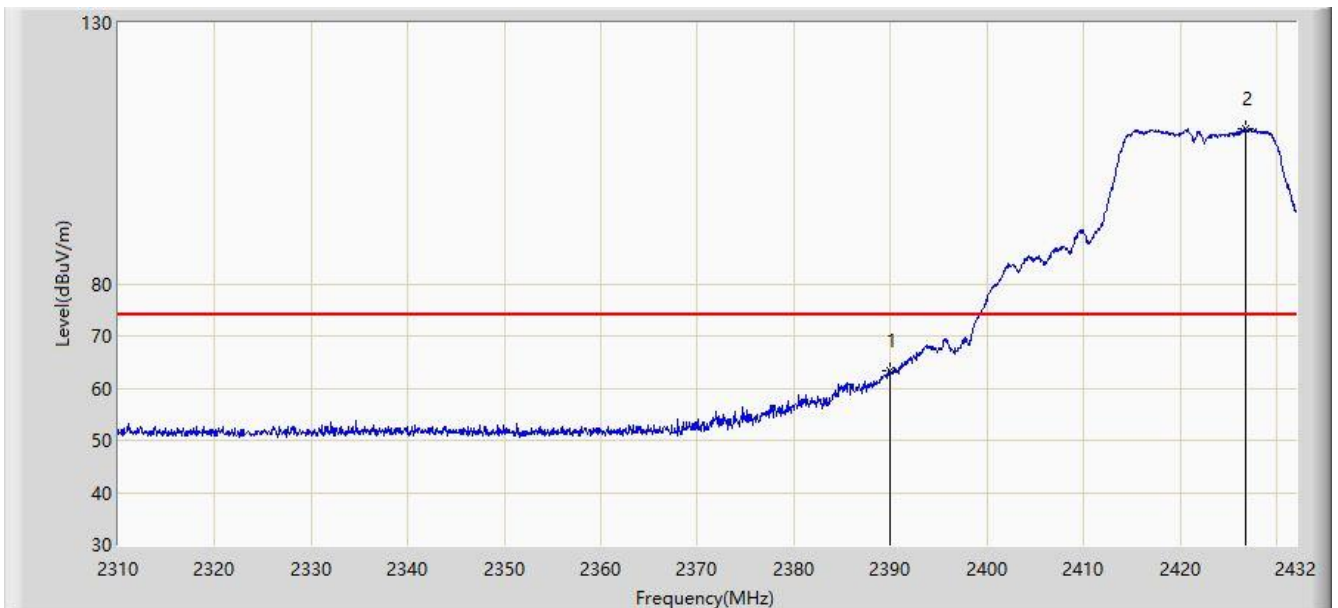


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	63.296	65.138	-10.704	74.000	-1.842	PK
2		*	2426.876	109.705	111.682	N/A	N/A	-1.977	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/02/28 - 02:12
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AC1300 MU-MIMO 迷你 USB 無線網卡	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11g at Channel 2422MHz, Ant 0	

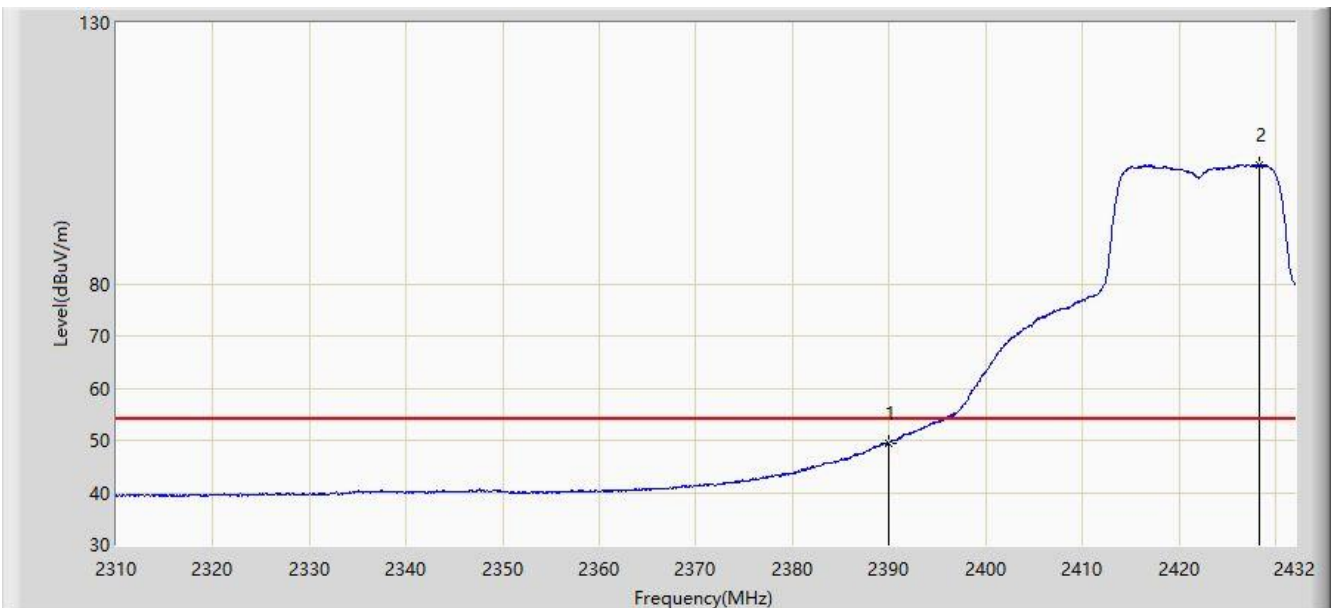


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	49.553	51.395	-4.447	54.000	-1.842	AV
2		*	2428.279	102.886	104.869	N/A	N/A	-1.983	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/02/28 - 02:16
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AC1300 MU-MIMO 迷你 USB 無線網卡	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11g at Channel 2422MHz, Ant 0	

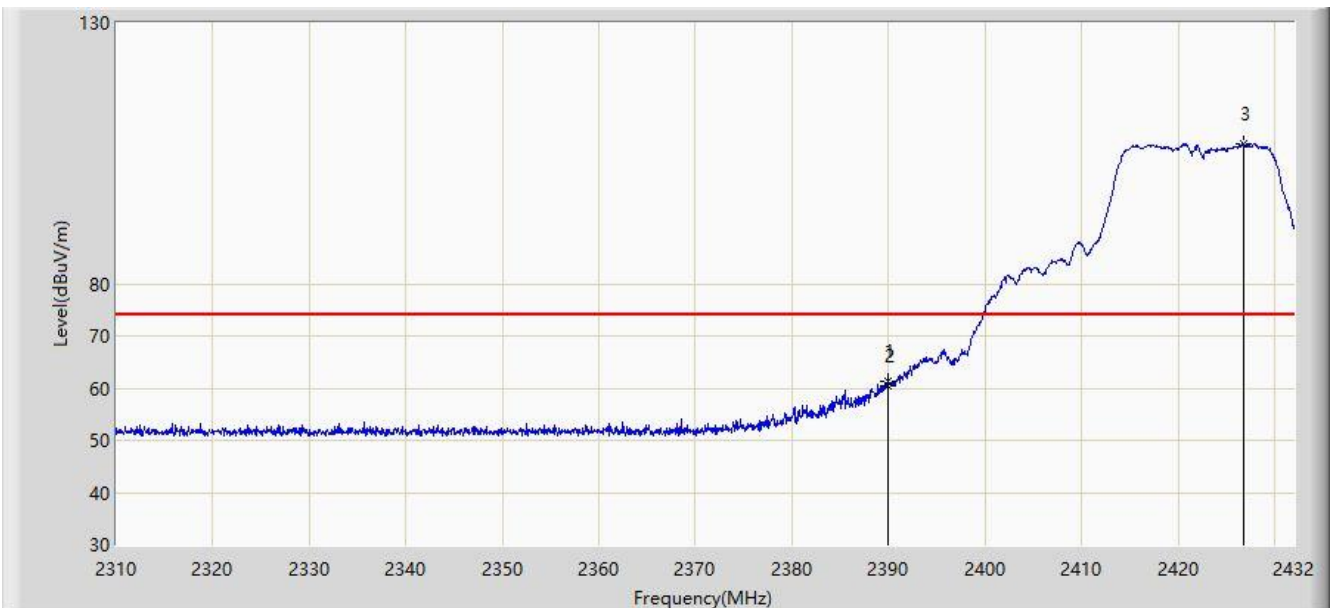


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2389.910	61.381	63.223	-12.619	74.000	-1.841	PK
2			2390.000	60.521	62.363	-13.479	74.000	-1.842	PK
3		*	2426.815	106.786	108.763	N/A	N/A	-1.977	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/02/28 - 02:18
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AC1300 MU-MIMO 迷你 USB 無線網卡	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11g at Channel 2422MHz, Ant 0	

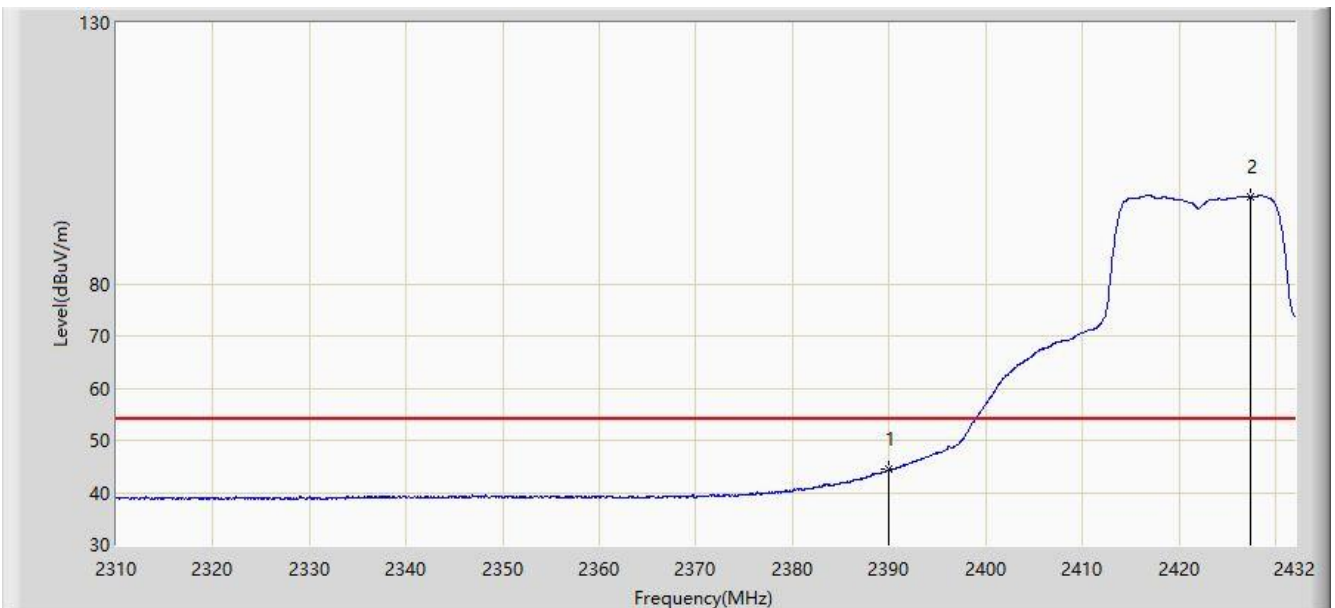


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	44.379	46.221	-9.621	54.000	-1.842	AV
2		*	2427.364	96.738	98.717	N/A	N/A	-1.979	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/02/21 - 19:34
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AC1300 MU-MIMO 迷你 USB 無線網卡	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11g at Channel 2437MHz, Ant 0	

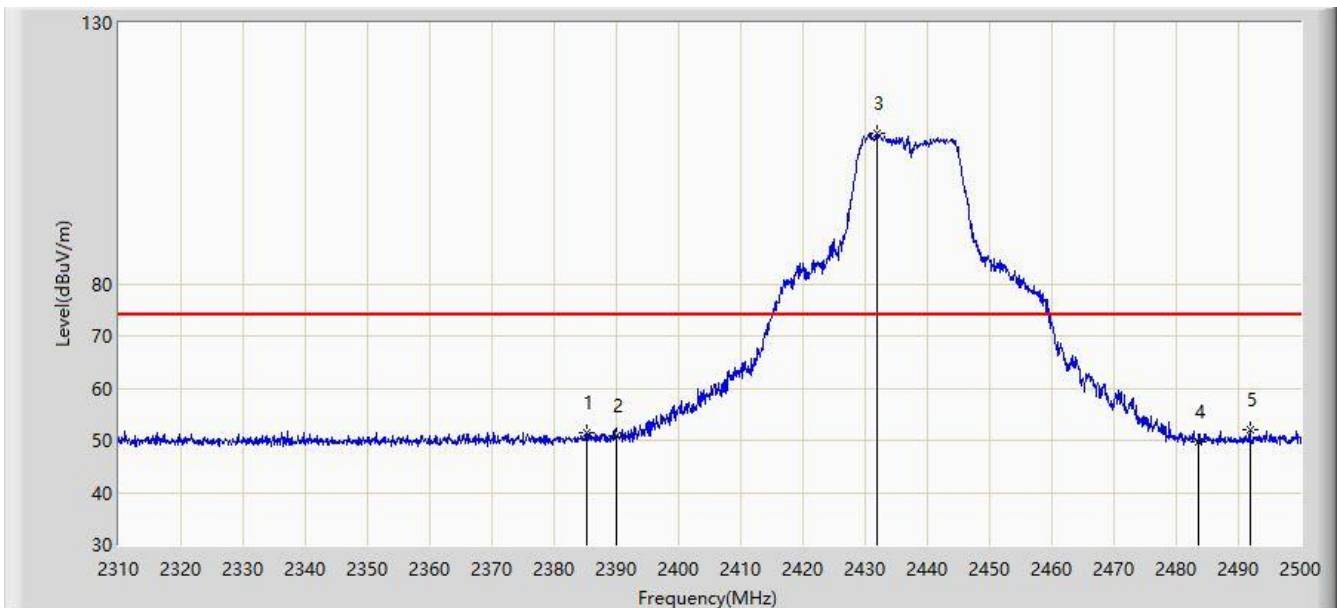


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2385.145	51.393	53.222	-22.607	74.000	-1.829	PK
2			2390.000	50.738	52.580	-23.262	74.000	-1.842	PK
3		*	2431.885	108.731	110.728	N/A	N/A	-1.997	PK
4			2483.500	49.844	51.921	-24.156	74.000	-2.077	PK
5			2491.925	51.957	54.035	-22.043	74.000	-2.078	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/02/21 - 19:36
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AC1300 MU-MIMO 迷你 USB 無線網卡	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11g at Channel 2437MHz, Ant 0	

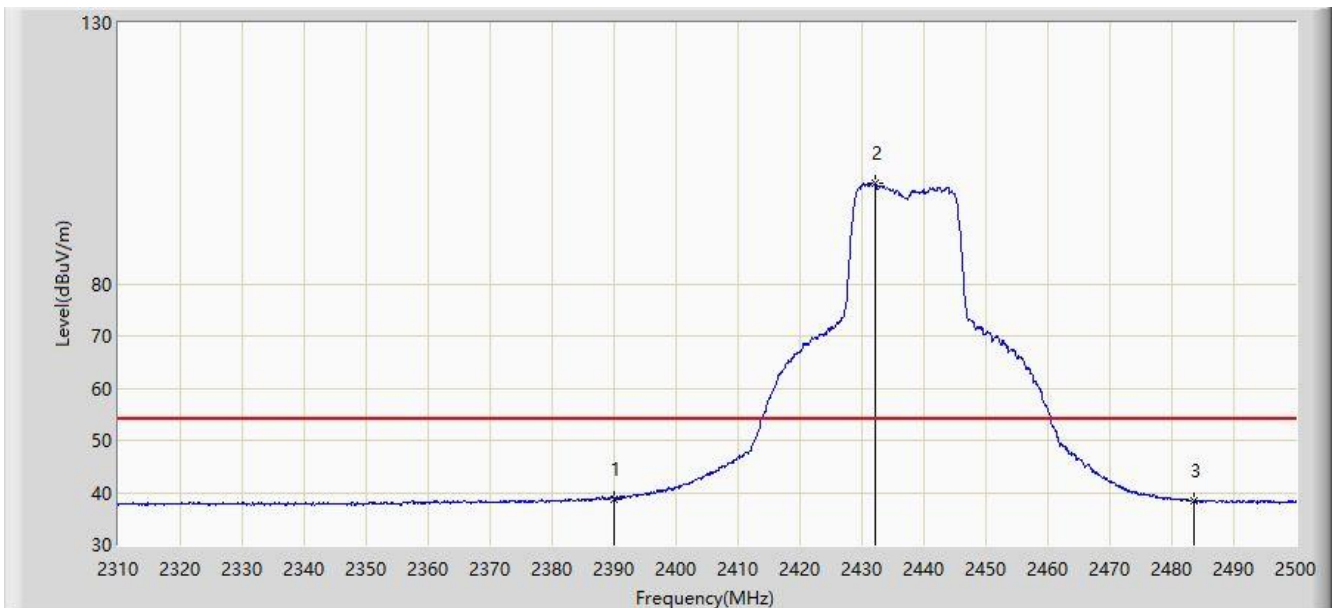


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	38.730	40.572	-15.270	54.000	-1.842	AV
2		*	2432.075	99.161	101.159	N/A	N/A	-1.998	AV
3			2483.500	38.494	40.571	-15.506	54.000	-2.077	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/02/21 - 19:37
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AC1300 MU-MIMO 迷你 USB 無線網卡	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11g at Channel 2437MHz, Ant 0	

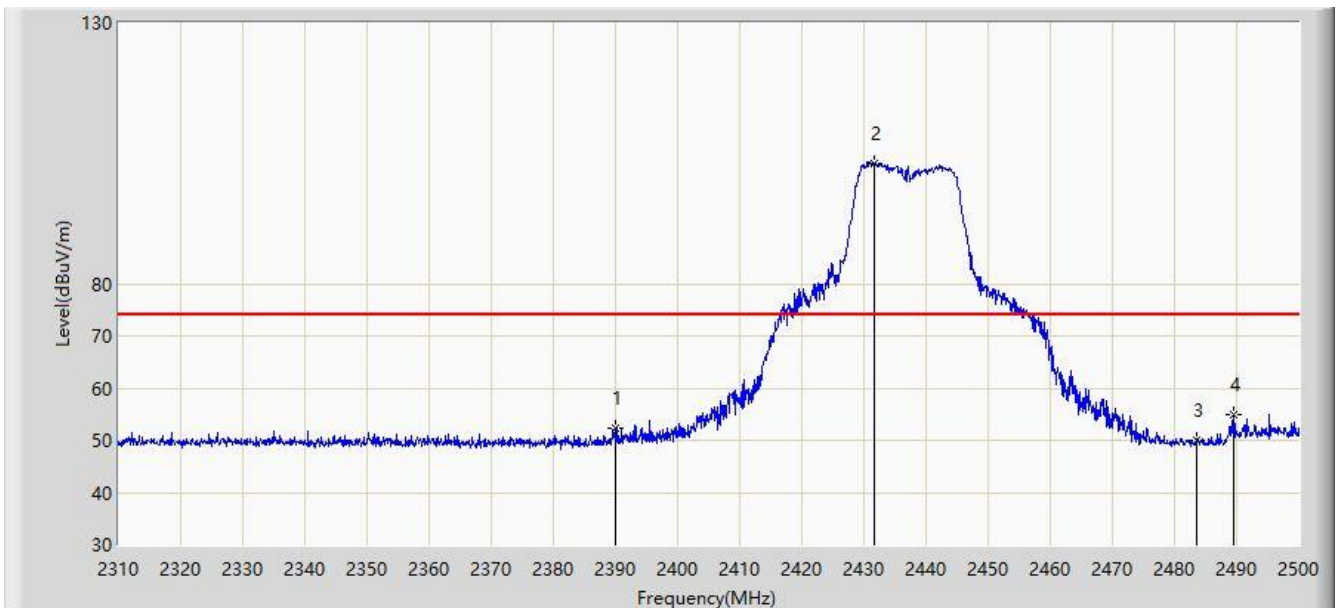


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	52.235	54.077	-21.765	74.000	-1.842	PK
2		*	2431.695	103.181	105.178	N/A	N/A	-1.997	PK
3			2483.500	49.969	52.046	-24.031	74.000	-2.077	PK
4			2489.455	54.785	56.863	-19.215	74.000	-2.078	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/02/21 - 19:38
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AC1300 MU-MIMO 迷你 USB 無線網卡	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11g at Channel 2437MHz, Ant 0	

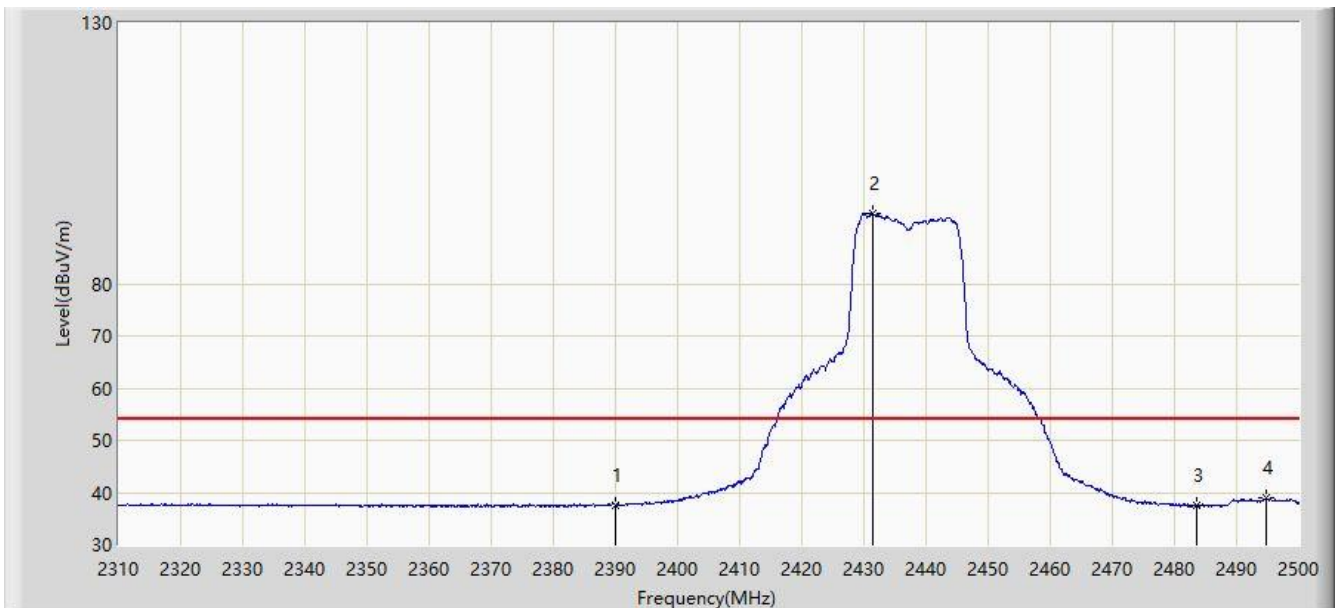


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	37.557	39.399	-16.443	54.000	-1.842	AV
2		*	2431.315	93.344	95.339	N/A	N/A	-1.995	AV
3			2483.500	37.528	39.605	-16.472	54.000	-2.077	AV
4			2494.775	38.918	40.997	-15.082	54.000	-2.078	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/02/28 - 02:21
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AC1300 MU-MIMO 迷你 USB 無線網卡	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11g at Channel 2452MHz, Ant 0	

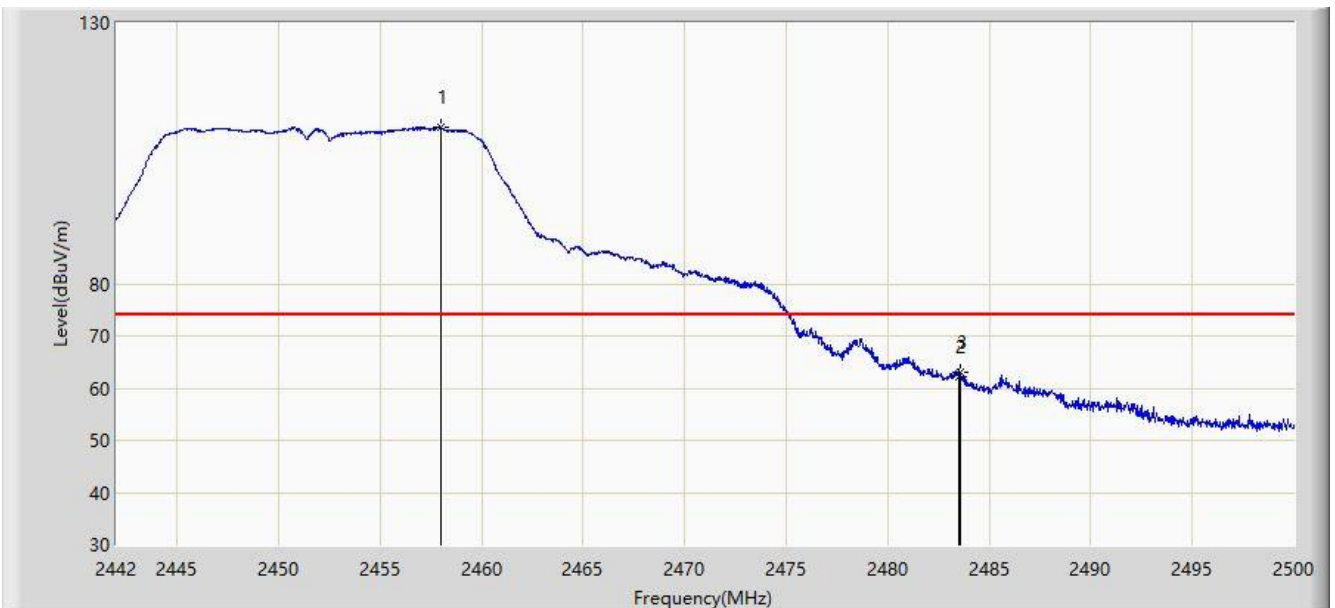


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2457.979	109.995	112.061	N/A	N/A	-2.066	PK
2			2483.500	62.259	64.336	-11.741	74.000	-2.077	PK
3			2483.586	63.124	65.201	-10.876	74.000	-2.077	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/02/28 - 02:24
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AC1300 MU-MIMO 迷你 USB 無線網卡	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11g at Channel 2452MHz, Ant 0	

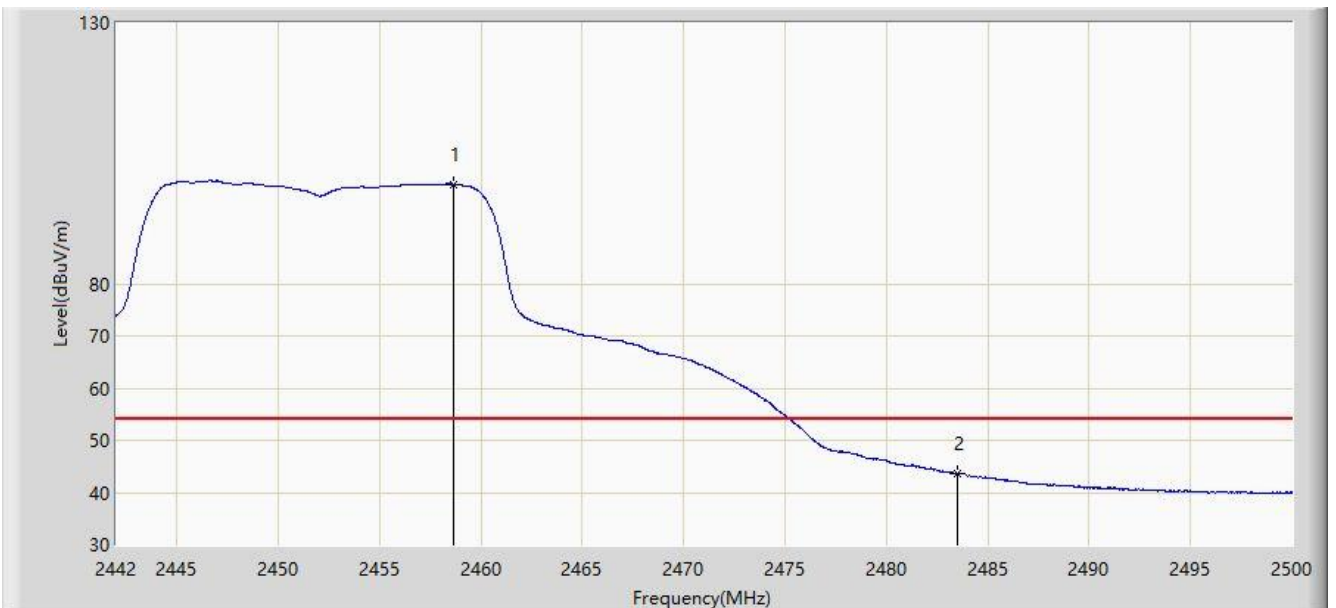


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2458.646	99.113	101.180	N/A	N/A	-2.068	AV
2			2483.500	43.715	45.792	-10.285	54.000	-2.077	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/02/28 - 02:25
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AC1300 MU-MIMO 迷你 USB 無線網卡	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11g at Channel 2452MHz, Ant 0	

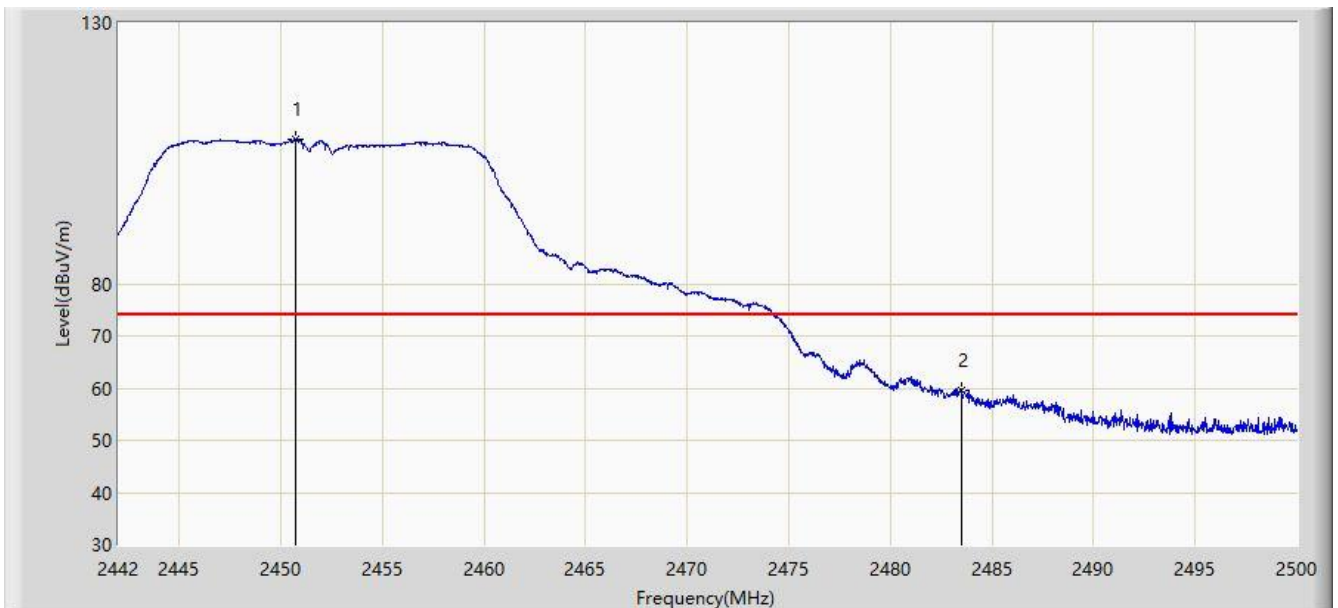


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2450.729	107.663	109.719	N/A	N/A	-2.057	PK
2			2483.500	59.451	61.528	-14.549	74.000	-2.077	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/02/28 - 02:27
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AC1300 MU-MIMO 迷你 USB 無線網卡	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11g at Channel 2452MHz, Ant 0	

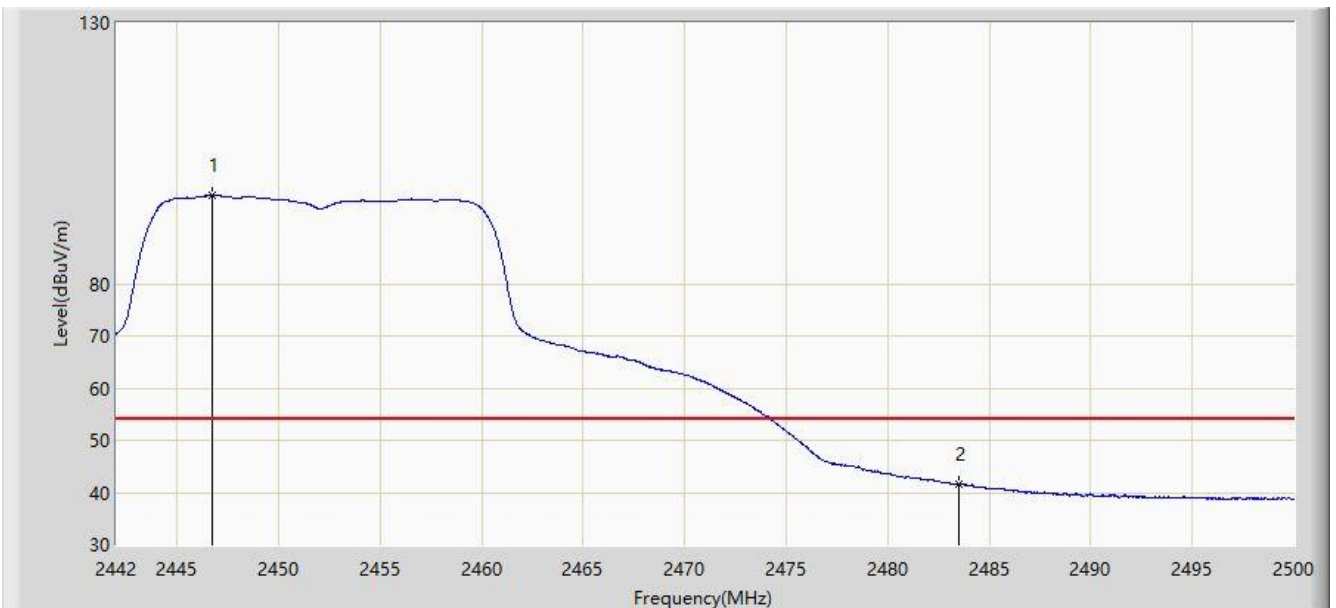


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2446.756	96.933	98.985	N/A	N/A	-2.053	AV
2			2483.500	41.507	43.584	-12.493	54.000	-2.077	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/02/28 - 02:28
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AC1300 MU-MIMO 迷你 USB 無線網卡	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11g at Channel 2457MHz, Ant 0	

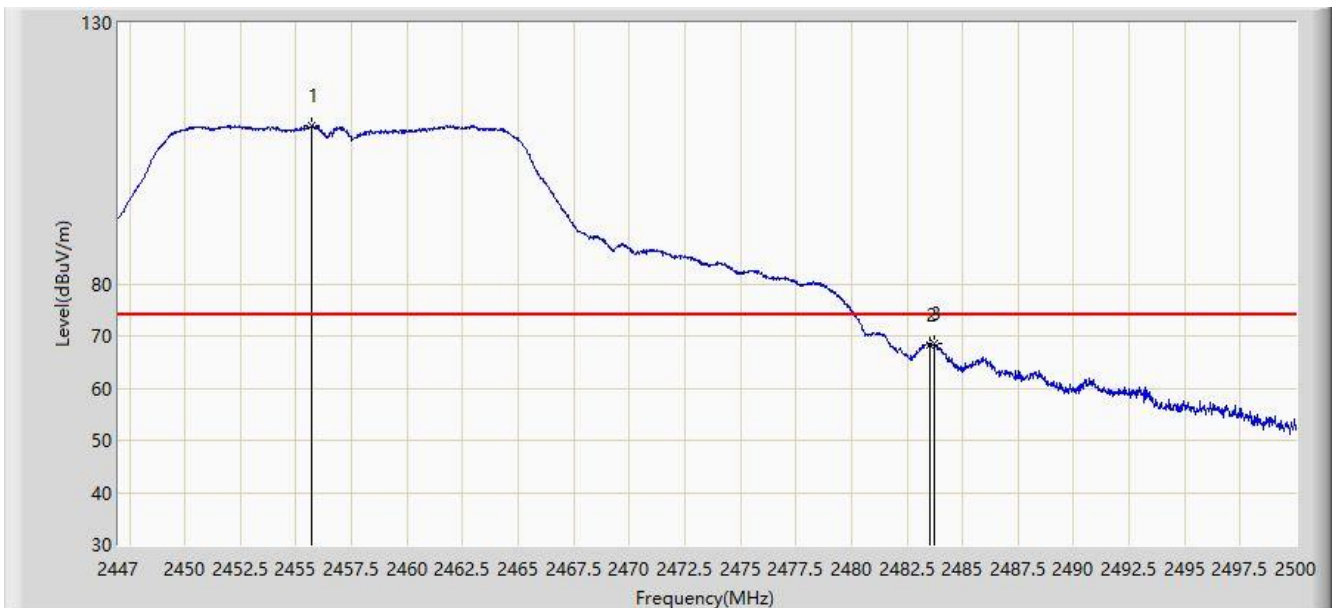


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2455.719	110.343	112.406	N/A	N/A	-2.063	PK
2			2483.500	68.307	70.384	-5.693	74.000	-2.077	PK
3			2483.756	68.581	70.658	-5.419	74.000	-2.076	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/02/28 - 02:31
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AC1300 MU-MIMO 迷你 USB 無線網卡	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11g at Channel 2457MHz, Ant 0	

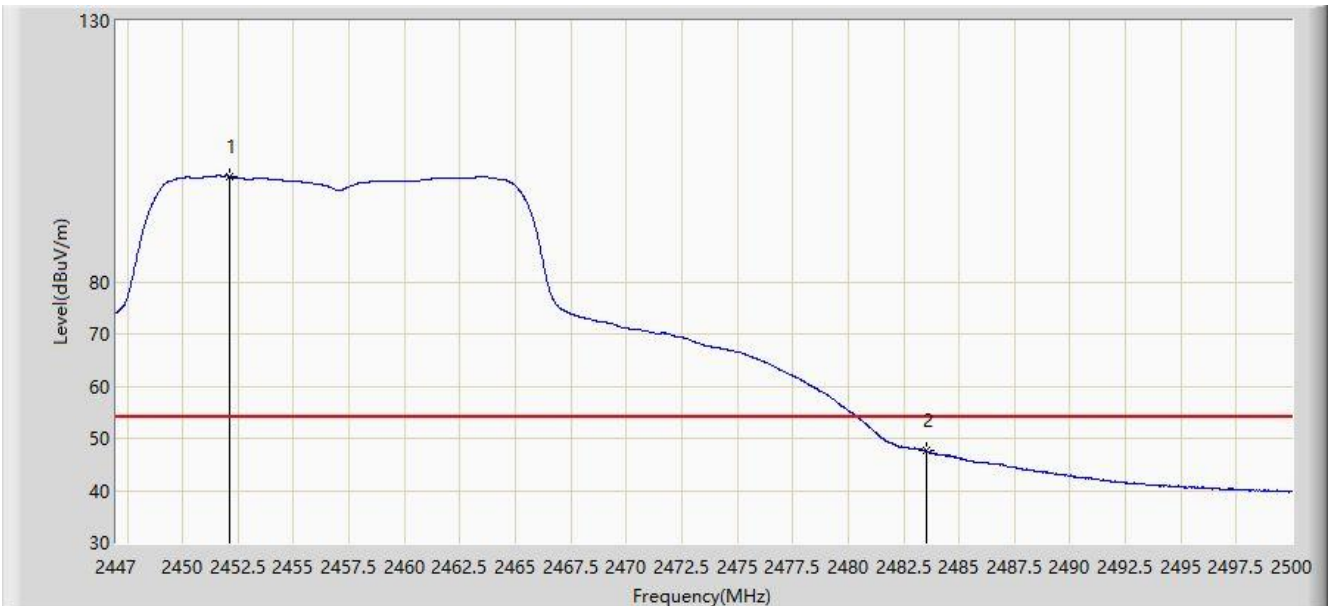


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2452.088	100.248	102.306	N/A	N/A	-2.058	AV
2			2483.500	47.615	49.692	-6.385	54.000	-2.077	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/02/28 - 02:32
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AC1300 MU-MIMO 迷你 USB 無線網卡	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11g at Channel 2457MHz, Ant 0	

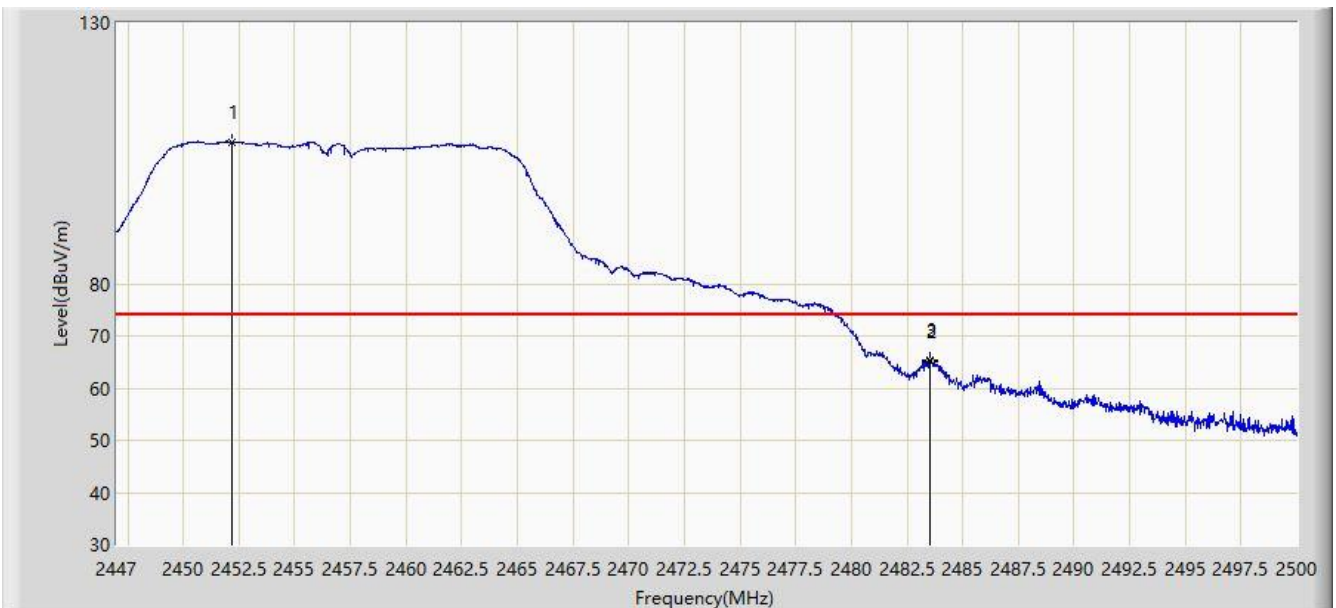


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2452.167	107.176	109.234	N/A	N/A	-2.058	PK
2			2483.500	64.959	67.036	-9.041	74.000	-2.077	PK
3			2483.543	65.421	67.498	-8.579	74.000	-2.077	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/02/28 - 02:34
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AC1300 MU-MIMO 迷你 USB 無線網卡	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11g at Channel 2457MHz, Ant 0	

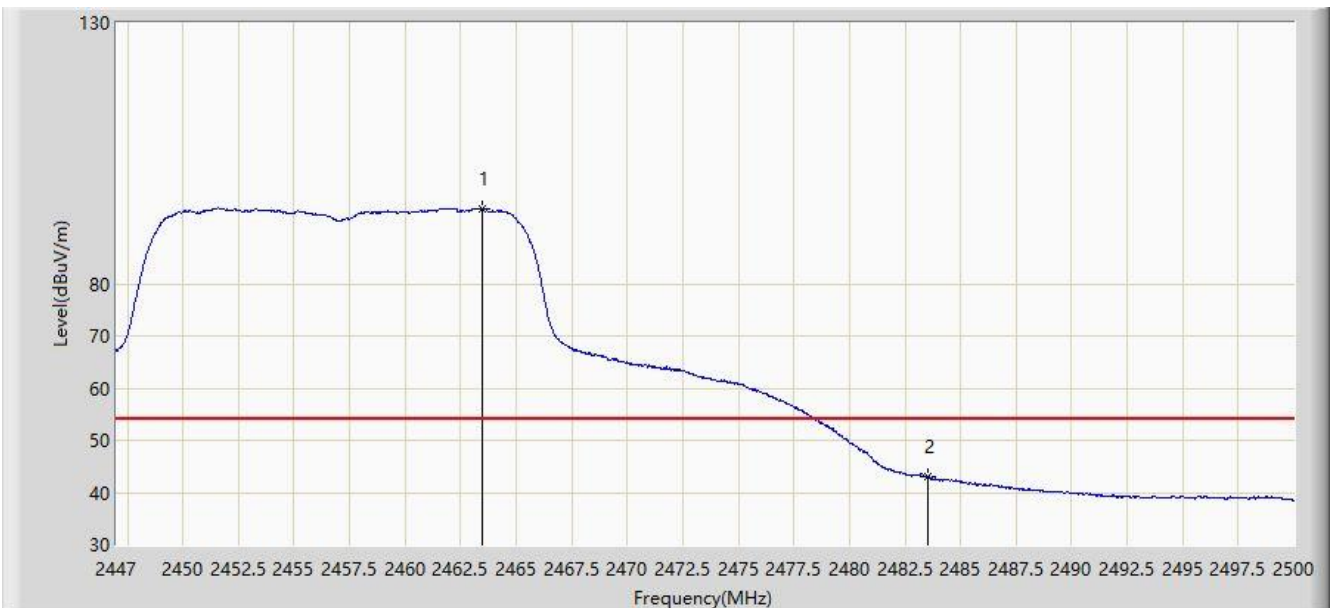


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2463.457	94.475	96.547	N/A	N/A	-2.072	AV
2			2483.500	43.012	45.089	-10.988	54.000	-2.077	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/02/21 - 19:40
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AC1300 MU-MIMO 迷你 USB 無線網卡	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11g at Channel 2462MHz, Ant 0	

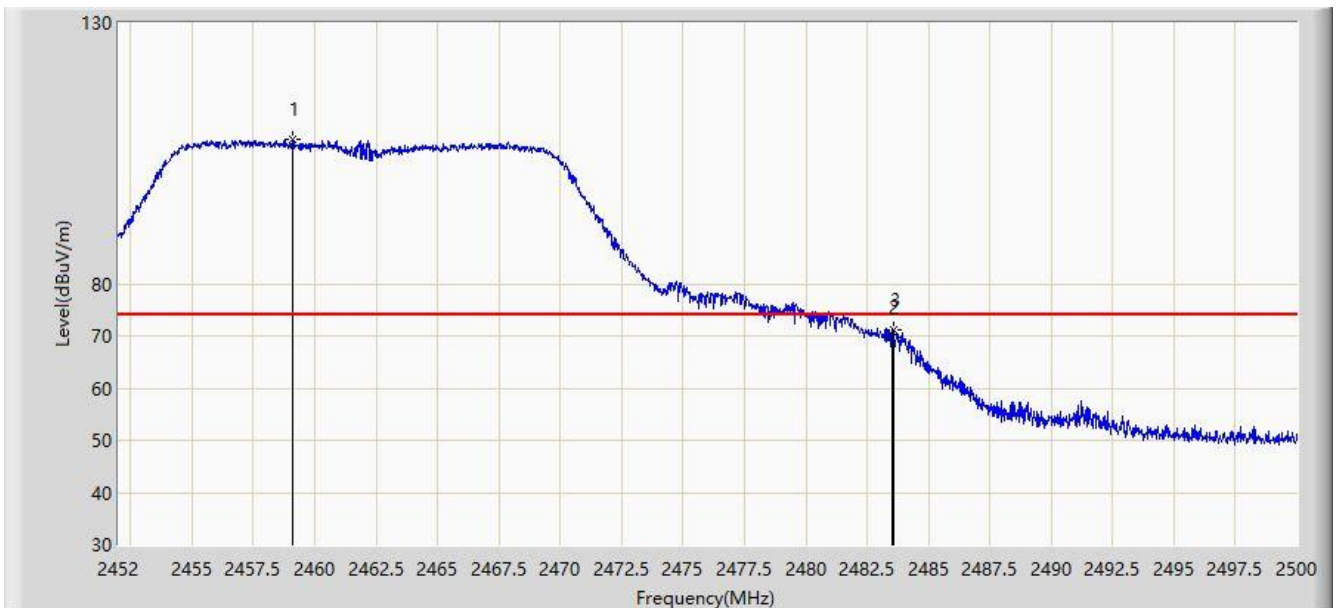


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2459.080	107.667	109.735	N/A	N/A	-2.068	PK
2			2483.500	69.648	71.725	-4.352	74.000	-2.077	PK
3			2483.584	71.120	73.197	-2.880	74.000	-2.077	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/02/21 - 19:41
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AC1300 MU-MIMO 迷你 USB 無線網卡	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11g at Channel 2462MHz, Ant 0	

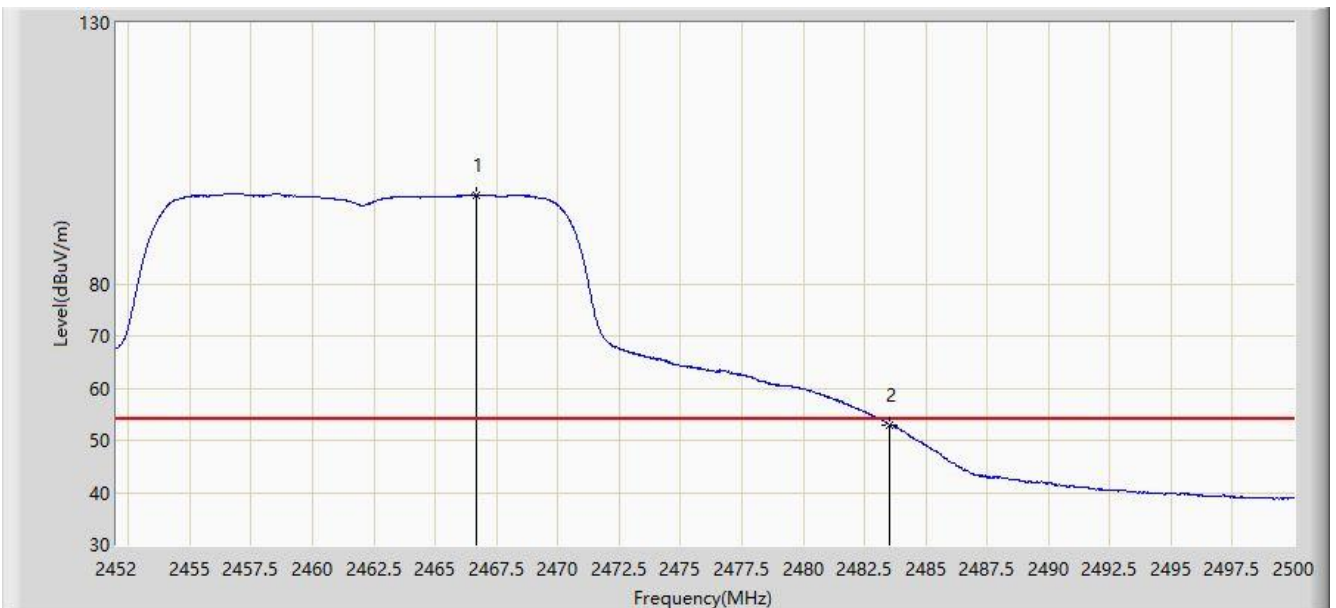


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2466.688	96.950	99.023	N/A	N/A	-2.073	AV
2			2483.500	53.027	55.104	-0.973	54.000	-2.077	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/02/21 - 19:44
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AC1300 MU-MIMO 迷你 USB 無線網卡	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11g at Channel 2462MHz, Ant 0	

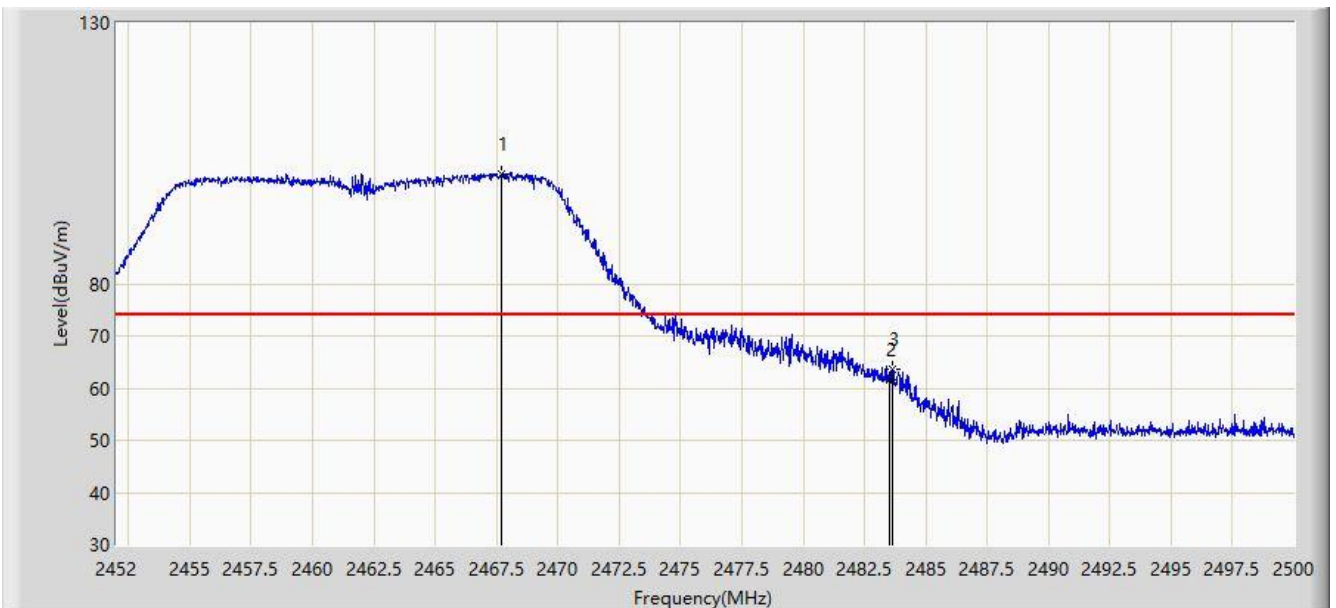


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2467.696	101.072	103.146	N/A	N/A	-2.074	PK
2			2483.500	61.547	63.624	-12.453	74.000	-2.077	PK
3			2483.632	63.718	65.795	-10.282	74.000	-2.077	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/02/21 - 19:46
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AC1300 MU-MIMO 迷你 USB 無線網卡	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11g at Channel 2462MHz, Ant 0	

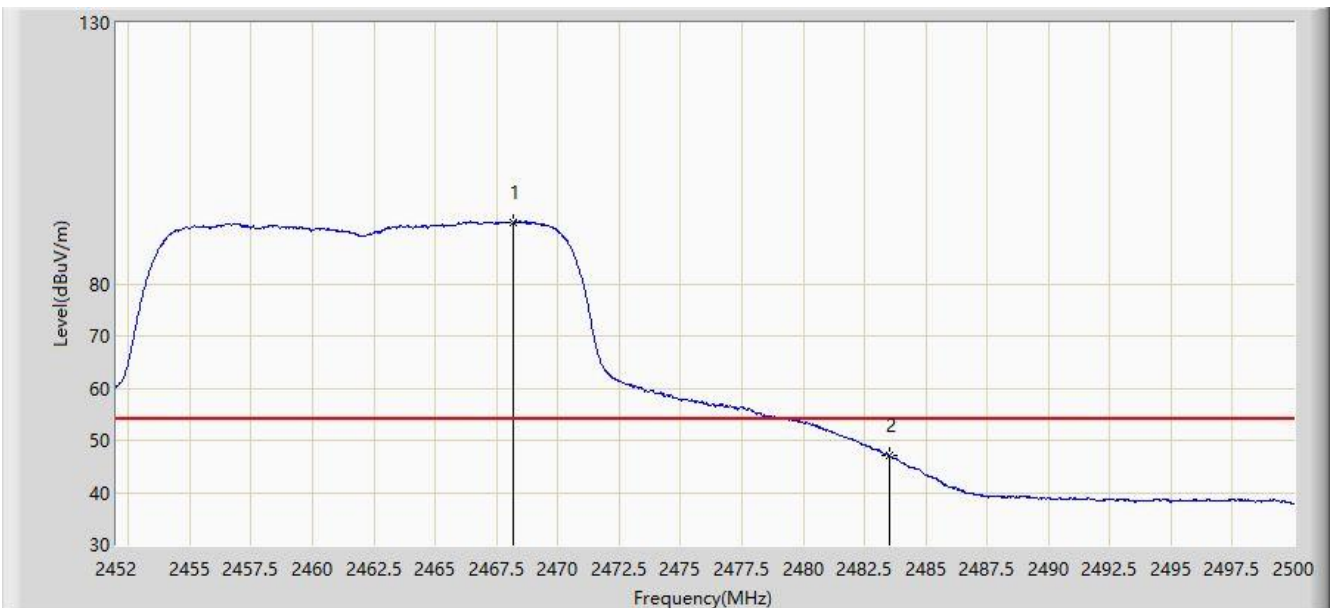


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2468.200	91.786	93.860	N/A	N/A	-2.073	AV
2			2483.500	47.076	49.153	-6.924	54.000	-2.077	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/02/21 - 19:52
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AC1300 MU-MIMO 迷你 USB 無線網卡	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11n-HT20 at Channel 2412MHz, Ant 0 + 1	

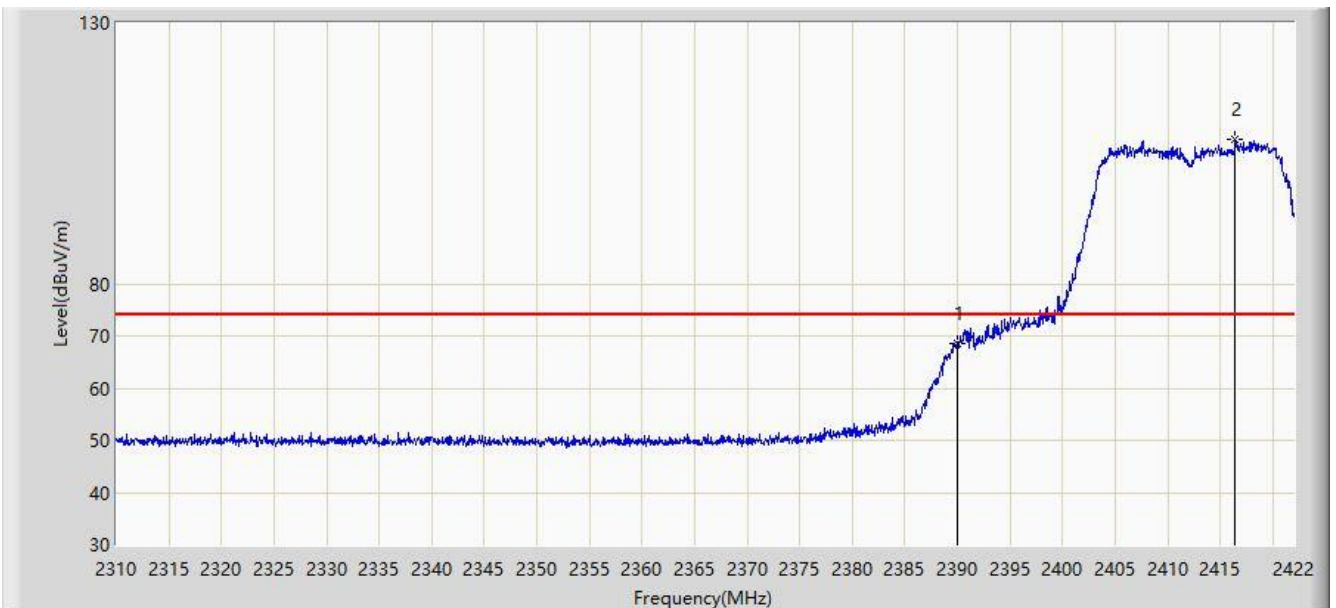


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	68.682	70.524	-5.318	74.000	-1.842	PK
2		*	2416.456	107.817	109.753	N/A	N/A	-1.936	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/02/21 - 19:50
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AC1300 MU-MIMO 迷你 USB 無線網卡	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11n-HT20 at Channel 2412MHz, Ant 0 + 1	

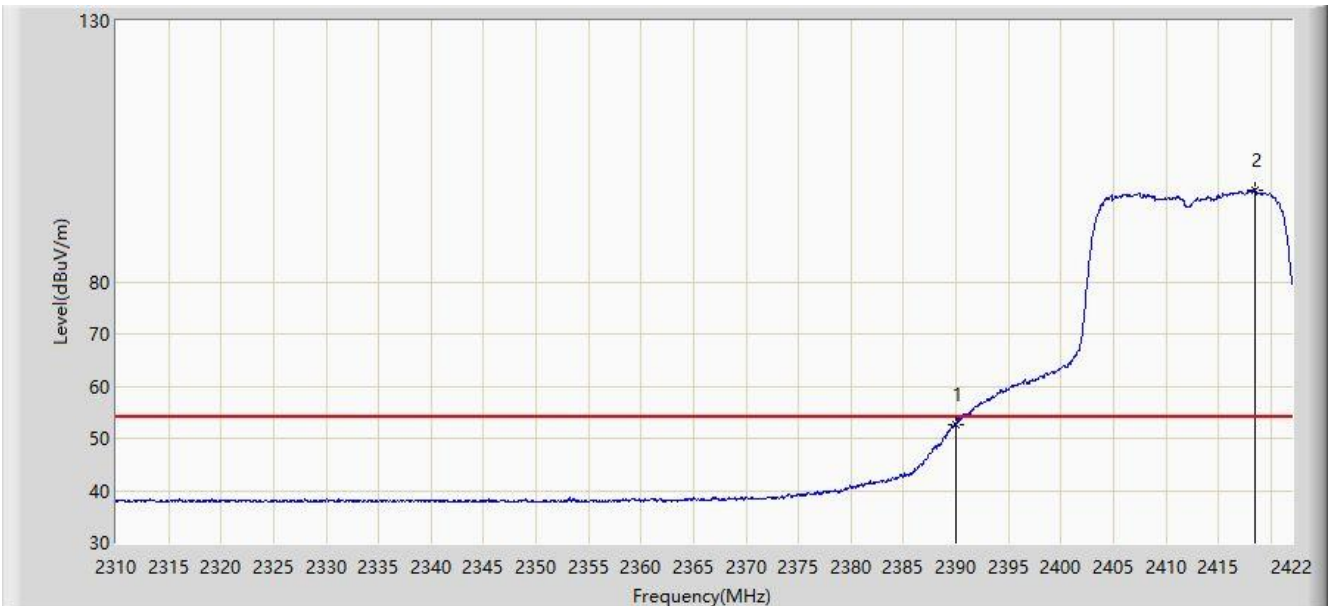


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	52.673	54.515	-1.327	54.000	-1.842	AV
2		*	2418.472	97.628	99.572	N/A	N/A	-1.944	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/02/21 - 19:54
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AC1300 MU-MIMO 迷你 USB 無線網卡	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11n-HT20 at Channel 2412MHz, Ant 0 + 1	

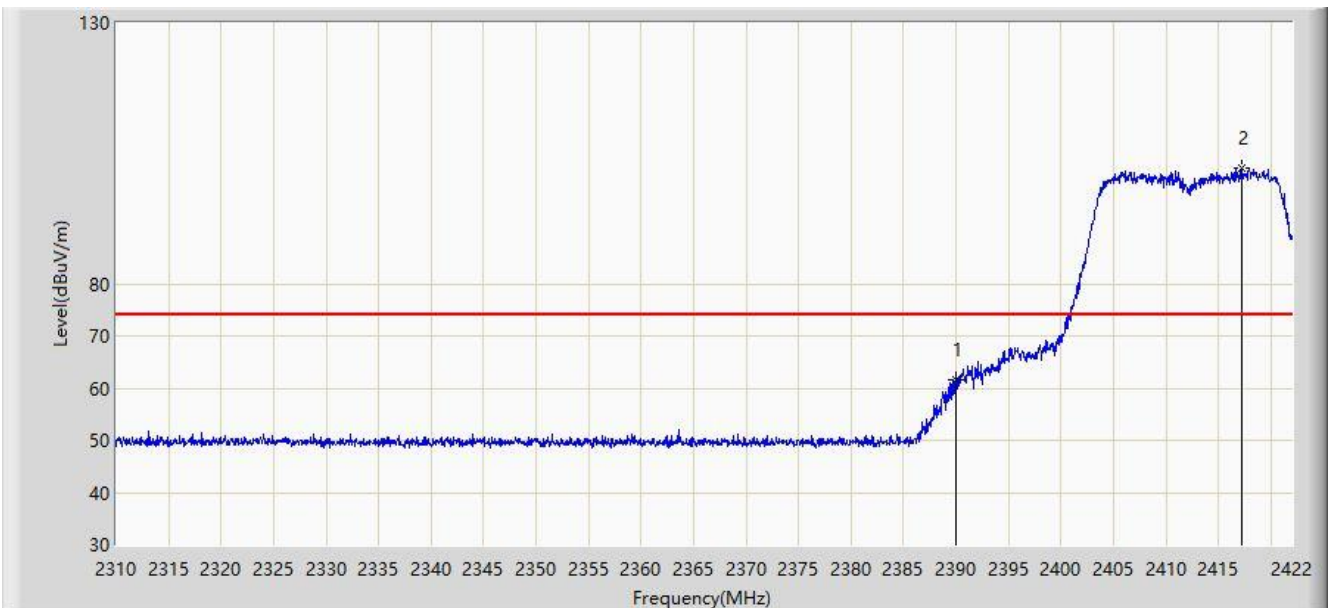


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	61.684	63.526	-12.316	74.000	-1.842	PK
2		*	2417.296	102.309	104.248	N/A	N/A	-1.939	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/02/21 - 19:55
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AC1300 MU-MIMO 迷你 USB 無線網卡	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11n-HT20 at Channel 2412MHz, Ant 0 + 1	

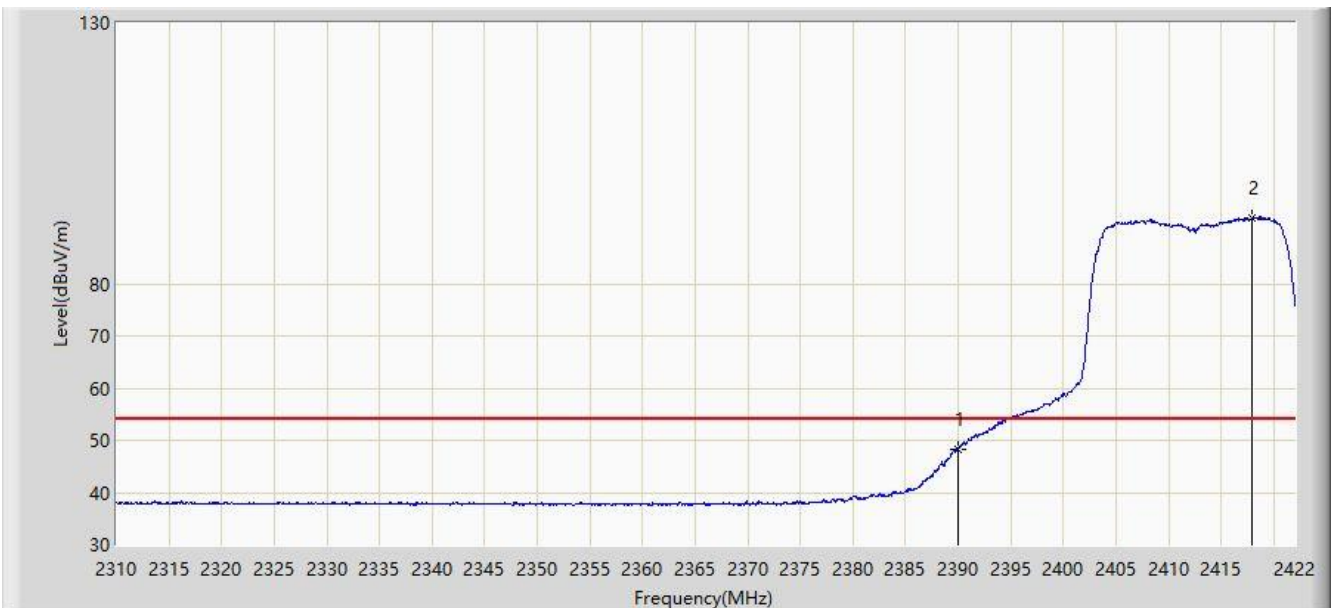


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	48.354	50.196	-5.646	54.000	-1.842	AV
2		*	2417.968	92.646	94.588	N/A	N/A	-1.942	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/02/28 - 02:36
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AC1300 MU-MIMO 迷你 USB 無線網卡	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11n-HT20 at Channel 2417MHz, Ant 0 + 1	

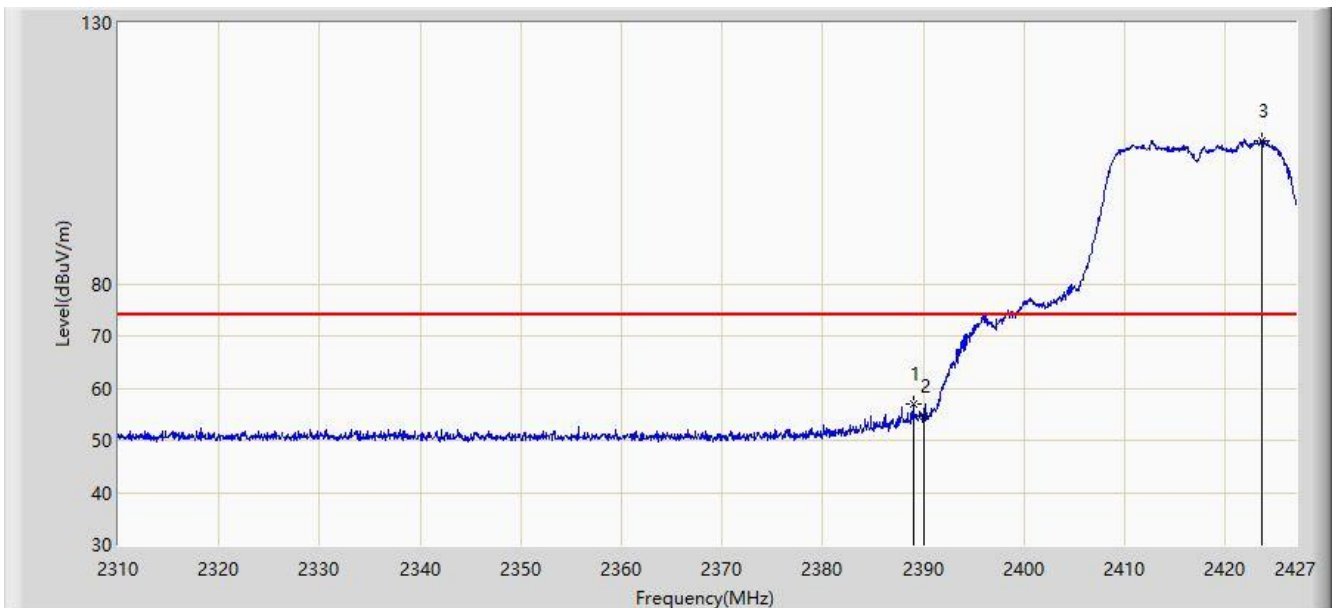


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2388.975	56.993	58.832	-17.007	74.000	-1.839	PK
2			2390.000	54.624	56.466	-19.376	74.000	-1.842	PK
3		*	2423.666	107.484	109.449	N/A	N/A	-1.965	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/02/28 - 02:44
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AC1300 MU-MIMO 迷你 USB 無線網卡	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11n-HT20 at Channel 2417MHz, Ant 0 + 1	

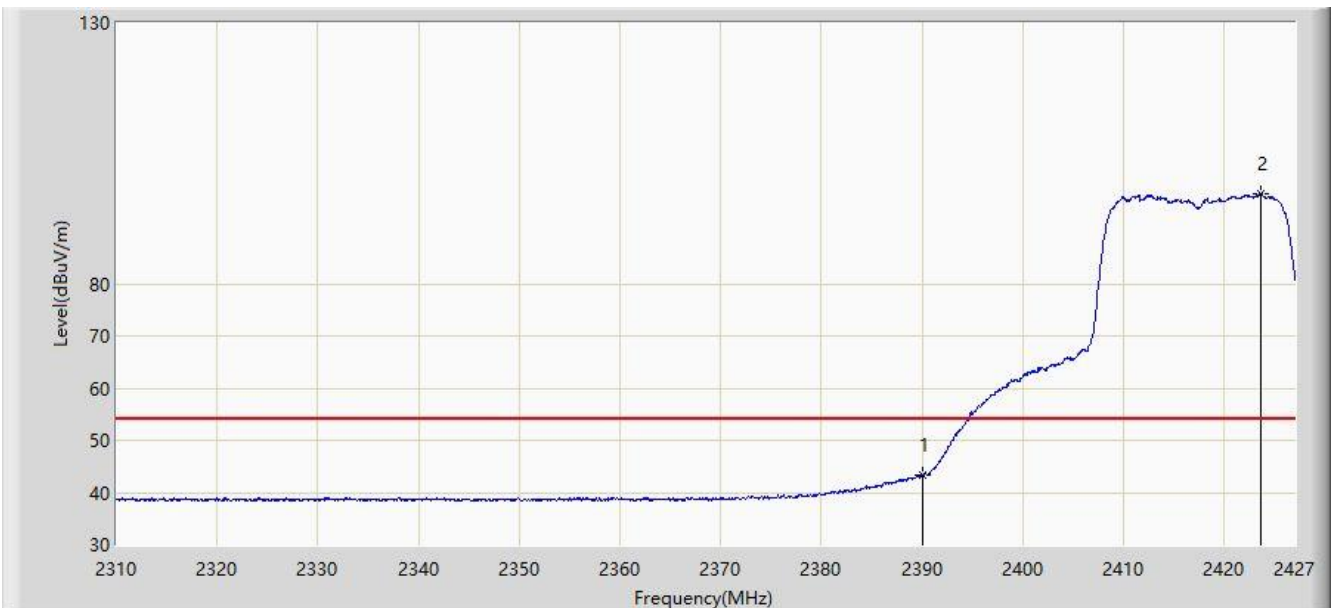


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	43.248	45.090	-10.752	54.000	-1.842	AV
2		*	2423.666	97.288	99.253	N/A	N/A	-1.965	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/02/28 - 02:50
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AC1300 MU-MIMO 迷你 USB 無線網卡	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11n-HT20 at Channel 2417MHz, Ant 0 + 1	

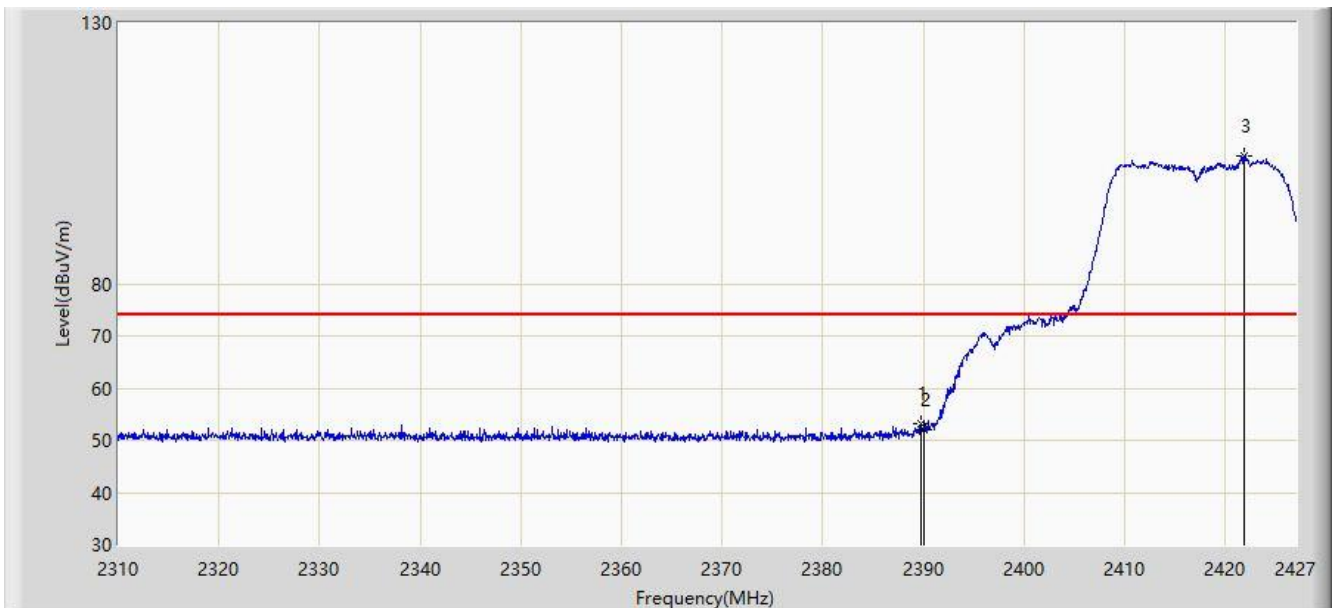


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2389.736	53.296	55.137	-20.704	74.000	-1.841	PK
2			2390.000	52.149	53.991	-21.851	74.000	-1.842	PK
3		*	2421.910	104.437	106.395	N/A	N/A	-1.957	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/02/28 - 02:52
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AC1300 MU-MIMO 迷你 USB 無線網卡	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11n-HT20 at Channel 2417MHz, Ant 0 + 1	

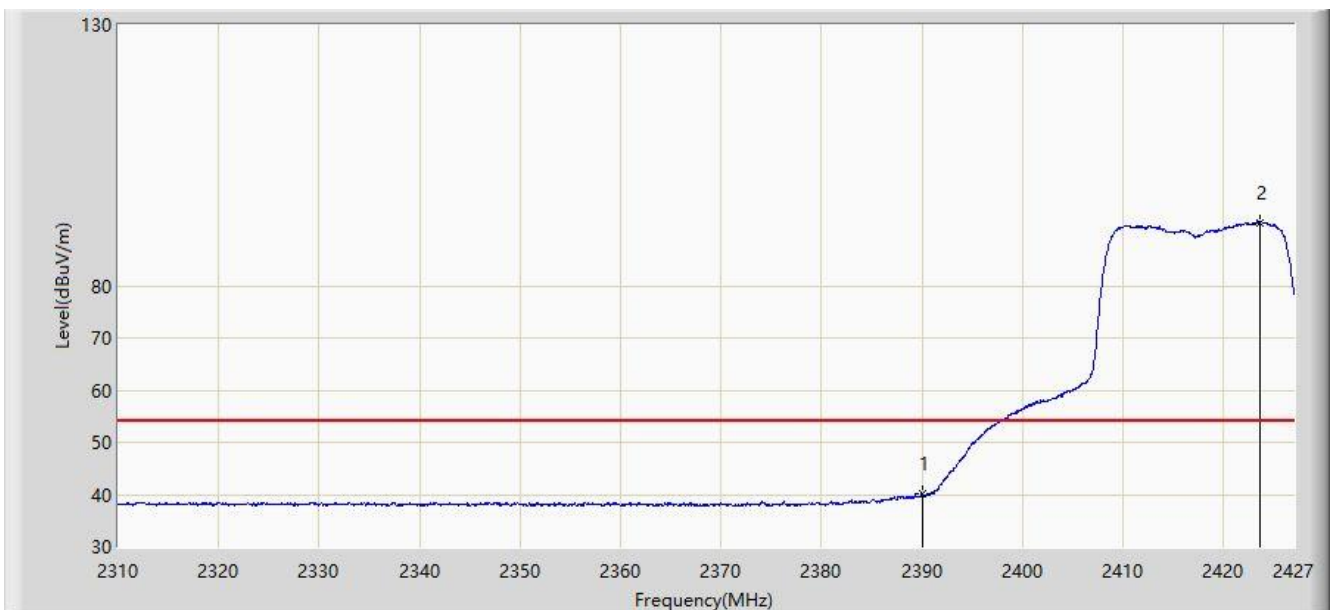


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	40.015	41.857	-13.985	54.000	-1.842	AV
2		*	2423.666	92.168	94.133	N/A	N/A	-1.965	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/02/28 - 02:53
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AC1300 MU-MIMO 迷你 USB 無線網卡	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11n-HT20 at Channel 2422MHz, Ant 0 + 1	

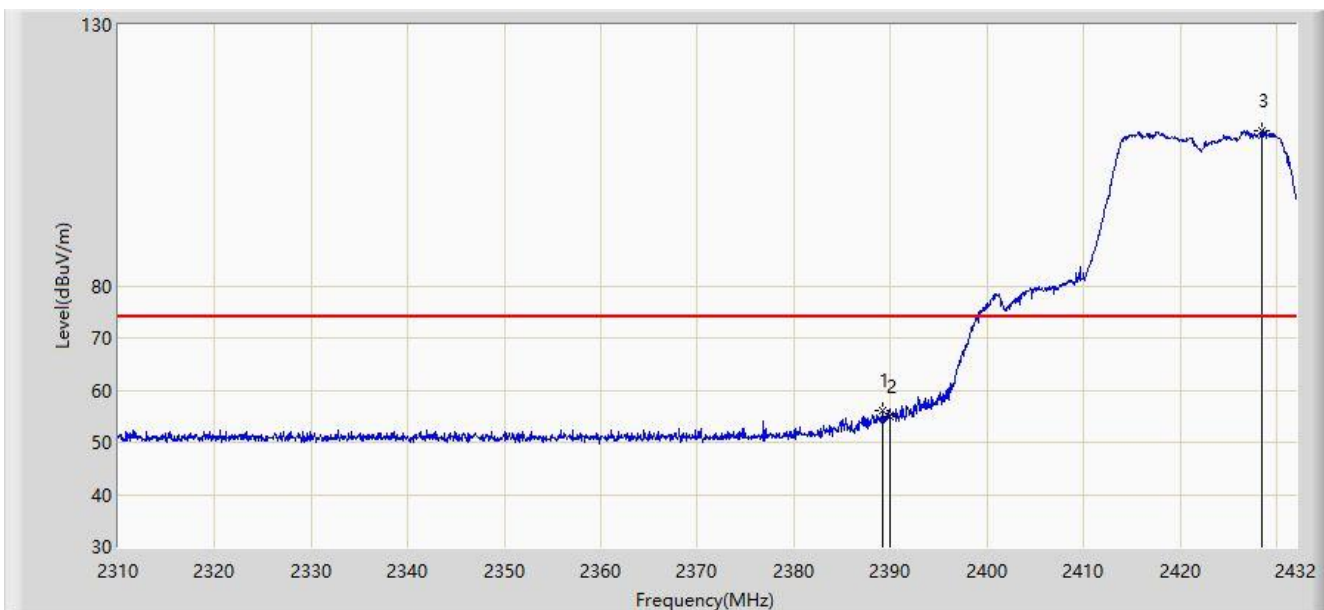


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2389.239	55.984	57.824	-18.016	74.000	-1.840	PK
2			2390.000	54.835	56.677	-19.165	74.000	-1.842	PK
3		*	2428.523	109.704	111.688	N/A	N/A	-1.984	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/02/28 - 03:00
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AC1300 MU-MIMO 迷你 USB 無線網卡	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11n-HT20 at Channel 2422MHz, Ant 0 + 1	

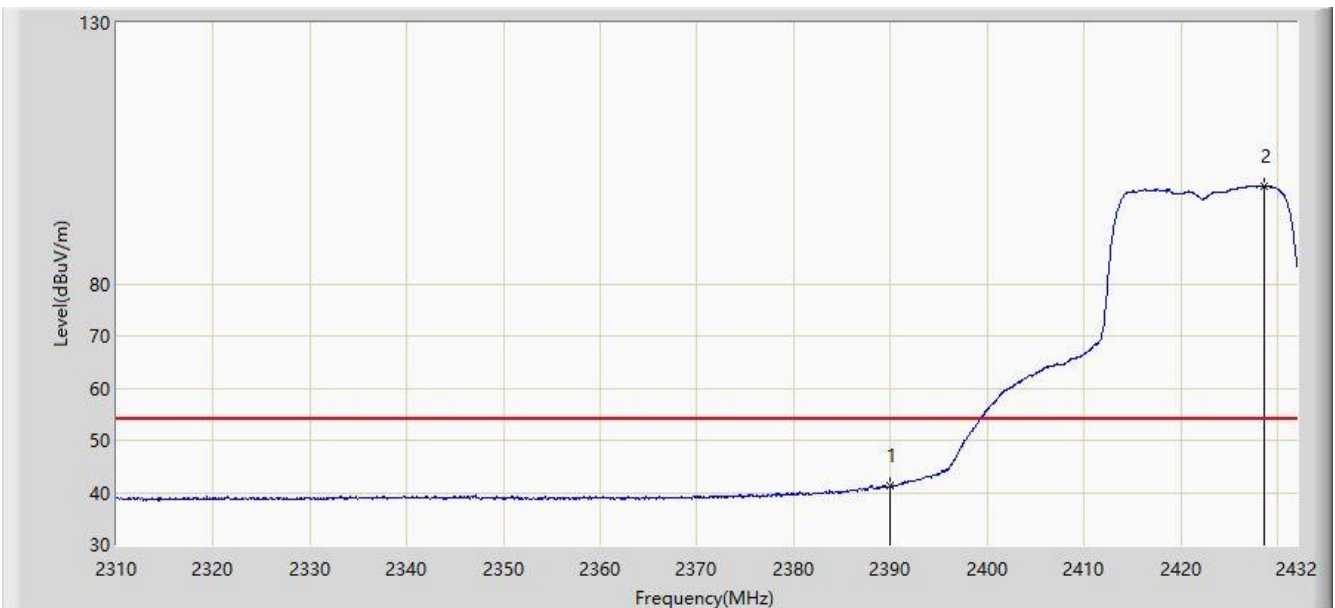


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	41.236	43.078	-12.764	54.000	-1.842	AV
2		*	2428.706	98.790	100.775	N/A	N/A	-1.985	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/02/28 - 03:01
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AC1300 MU-MIMO 迷你 USB 無線網卡	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11n-HT20 at Channel 2422MHz, Ant 0 + 1	

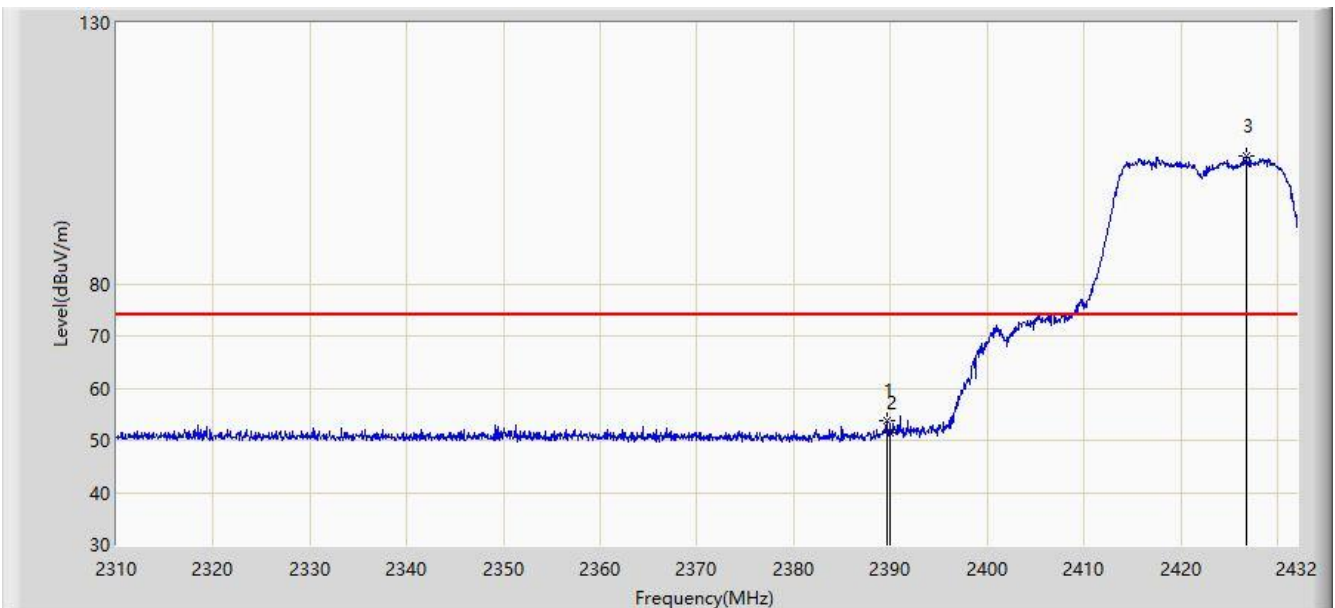


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2389.727	53.808	55.649	-20.192	74.000	-1.841	PK
2			2390.000	51.326	53.168	-22.674	74.000	-1.842	PK
3		*	2426.876	104.385	106.362	N/A	N/A	-1.977	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/02/28 - 03:03
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AC1300 MU-MIMO 迷你 USB 無線網卡	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11n-HT20 at Channel 2422MHz, Ant 0 + 1	

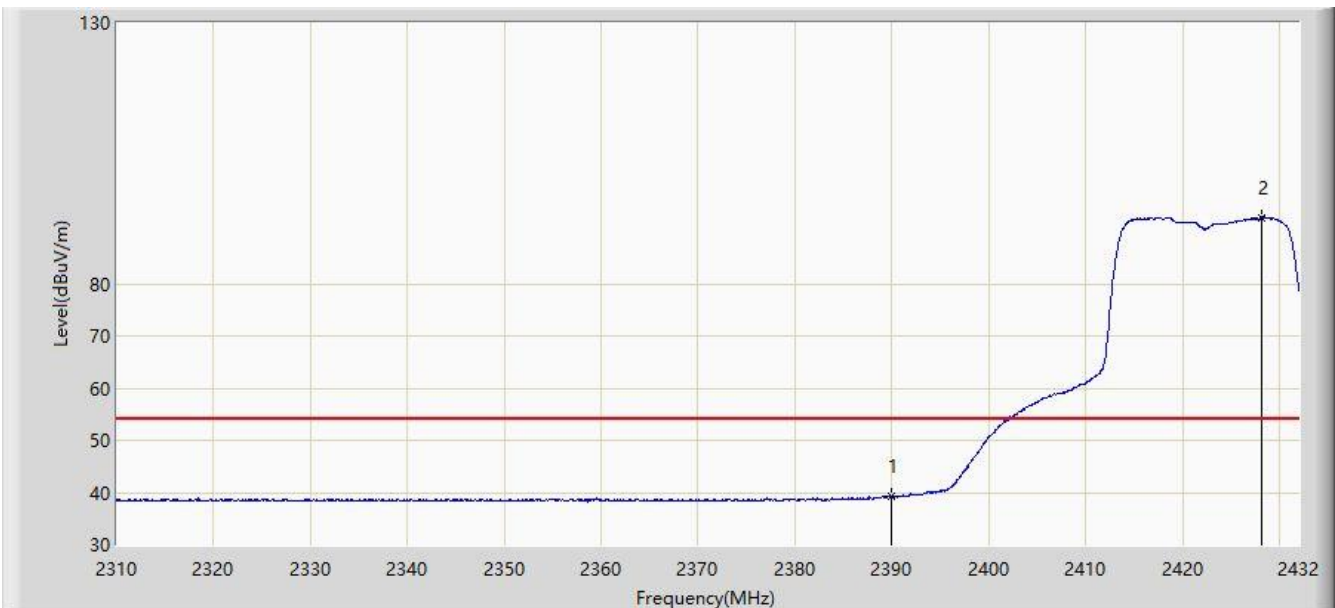


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	39.236	41.078	-14.764	54.000	-1.842	AV
2		*	2428.157	92.590	94.572	N/A	N/A	-1.982	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/02/21 - 19:57
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AC1300 MU-MIMO 迷你 USB 無線網卡	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11n-HT20 at Channel 2437MHz, Ant 0 + 1	

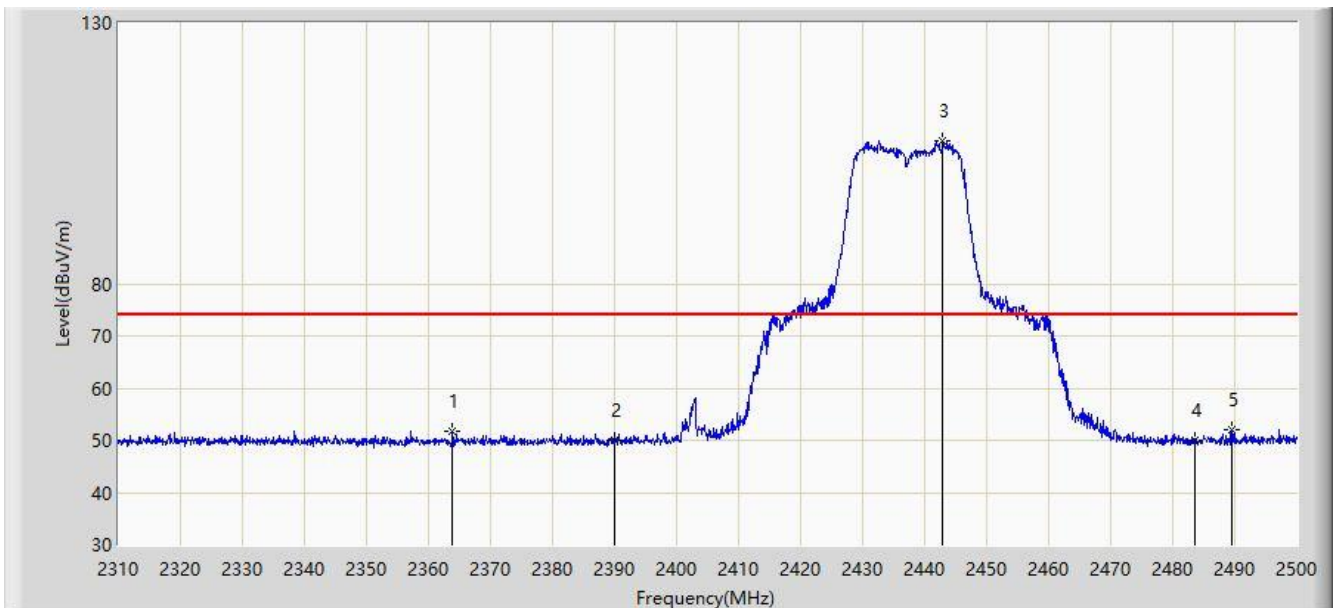


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2363.865	51.643	53.412	-22.357	74.000	-1.769	PK
2			2390.000	50.060	51.902	-23.940	74.000	-1.842	PK
3		*	2442.905	107.526	109.568	N/A	N/A	-2.042	PK
4			2483.500	49.959	52.036	-24.041	74.000	-2.077	PK
5			2489.550	51.900	53.978	-22.100	74.000	-2.078	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/02/21 - 19:59
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AC1300 MU-MIMO 迷你 USB 無線網卡	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11n-HT20 at Channel 2437MHz, Ant 0 + 1	

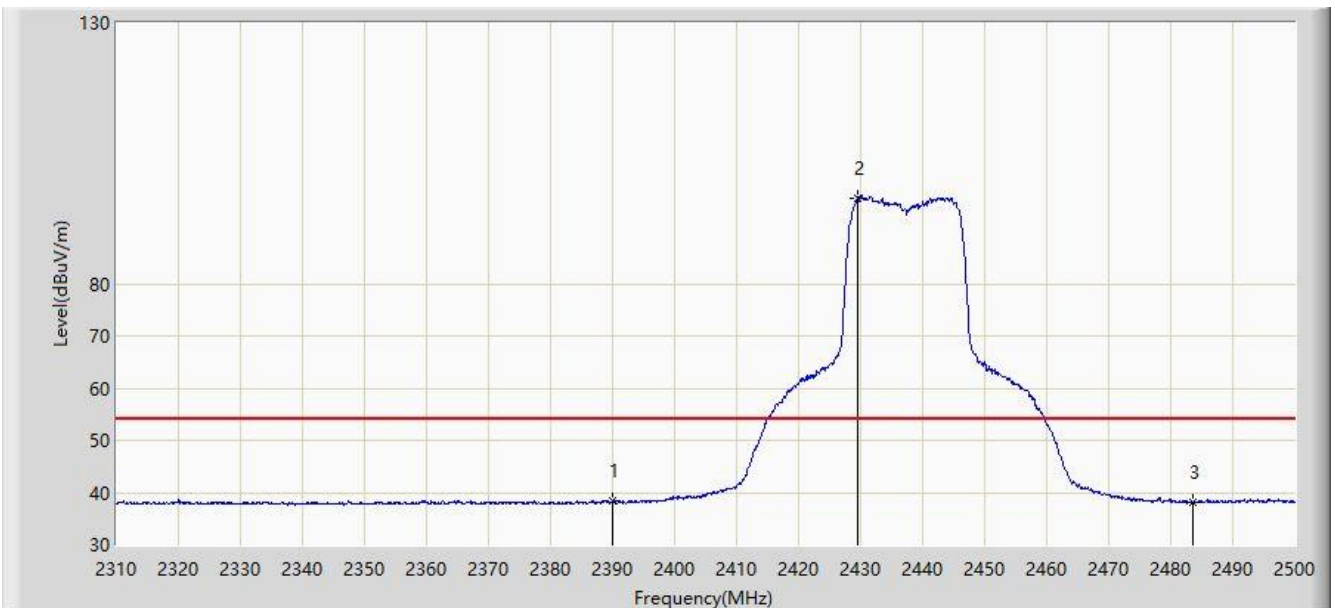


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	38.306	40.148	-15.694	54.000	-1.842	AV
2		*	2429.510	96.431	98.419	N/A	N/A	-1.989	AV
3			2483.500	38.000	40.077	-16.000	54.000	-2.077	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/02/21 - 20:01
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AC1300 MU-MIMO 迷你 USB 無線網卡	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11n-HT20 at Channel 2437MHz, Ant 0 + 1	

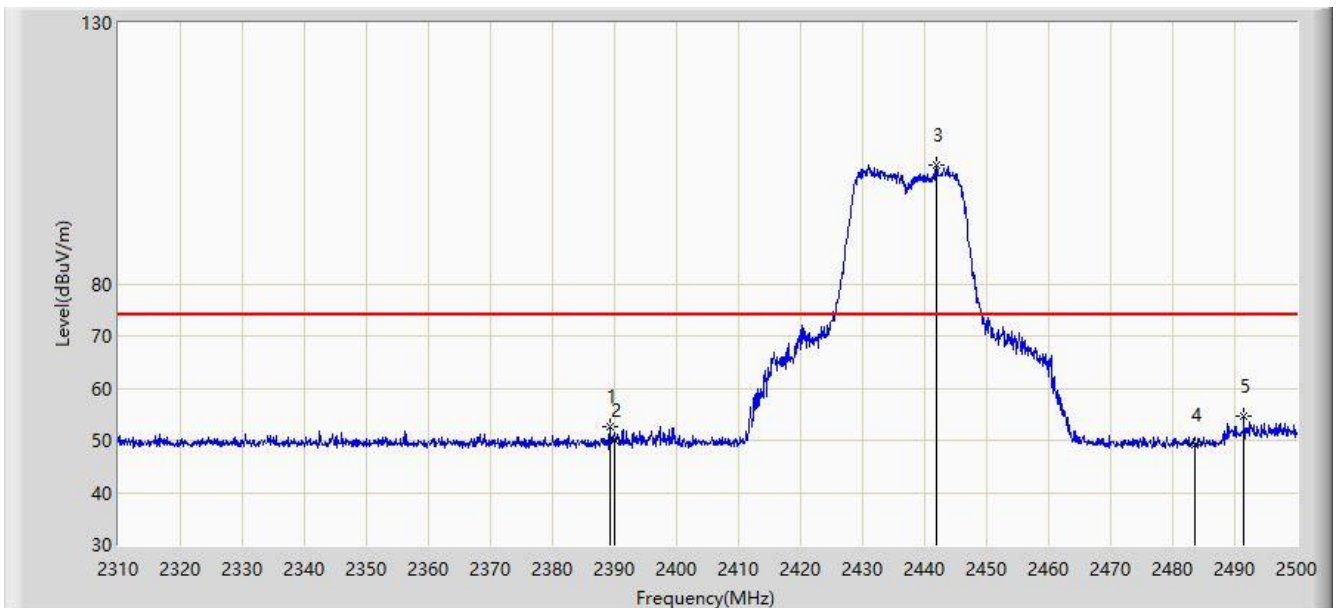


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2389.230	52.570	54.410	-21.430	74.000	-1.840	PK
2			2390.000	49.900	51.742	-24.100	74.000	-1.842	PK
3		*	2441.860	102.885	104.923	N/A	N/A	-2.038	PK
4			2483.500	49.084	51.161	-24.916	74.000	-2.077	PK
5			2491.545	54.730	56.808	-19.270	74.000	-2.078	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/02/21 - 20:02
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AC1300 MU-MIMO 迷你 USB 無線網卡	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11n-HT20 at Channel 2437MHz, Ant 0 + 1	

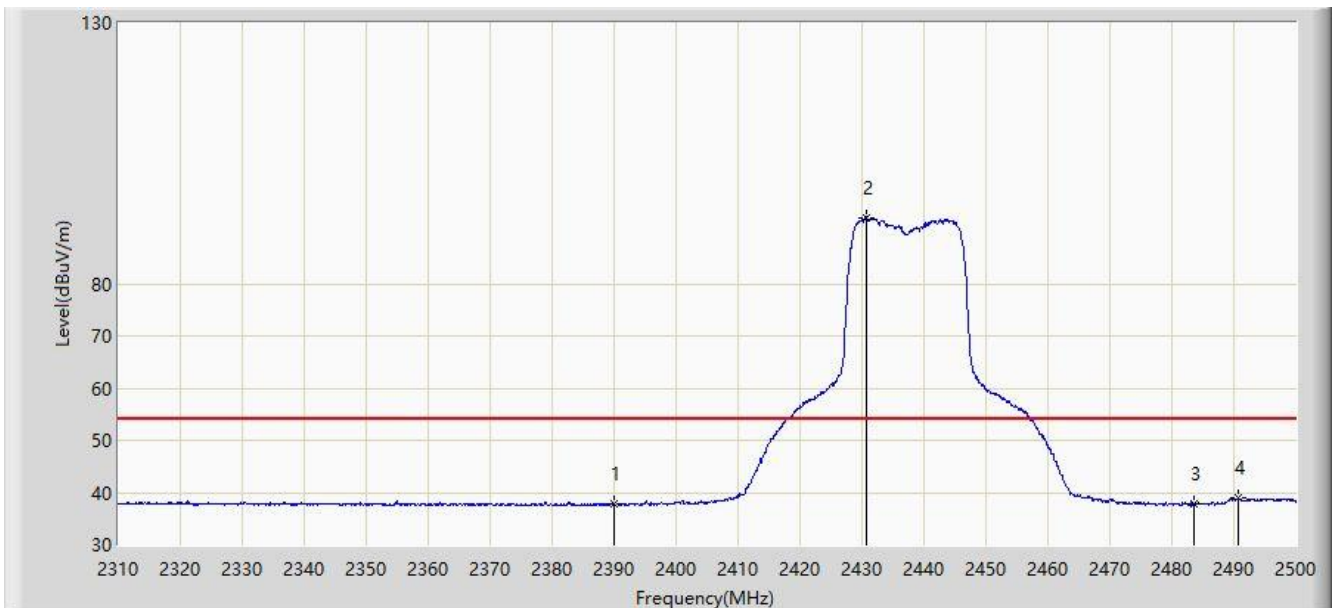


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	37.802	39.644	-16.198	54.000	-1.842	AV
2		*	2430.745	92.630	94.623	N/A	N/A	-1.993	AV
3			2483.500	37.814	39.891	-16.186	54.000	-2.077	AV
4			2490.785	38.892	40.970	-15.108	54.000	-2.078	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/02/28 - 03:04
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AC1300 MU-MIMO 迷你 USB 無線網卡	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11n-HT20 at Channel 2452MHz, Ant 0 + 1	

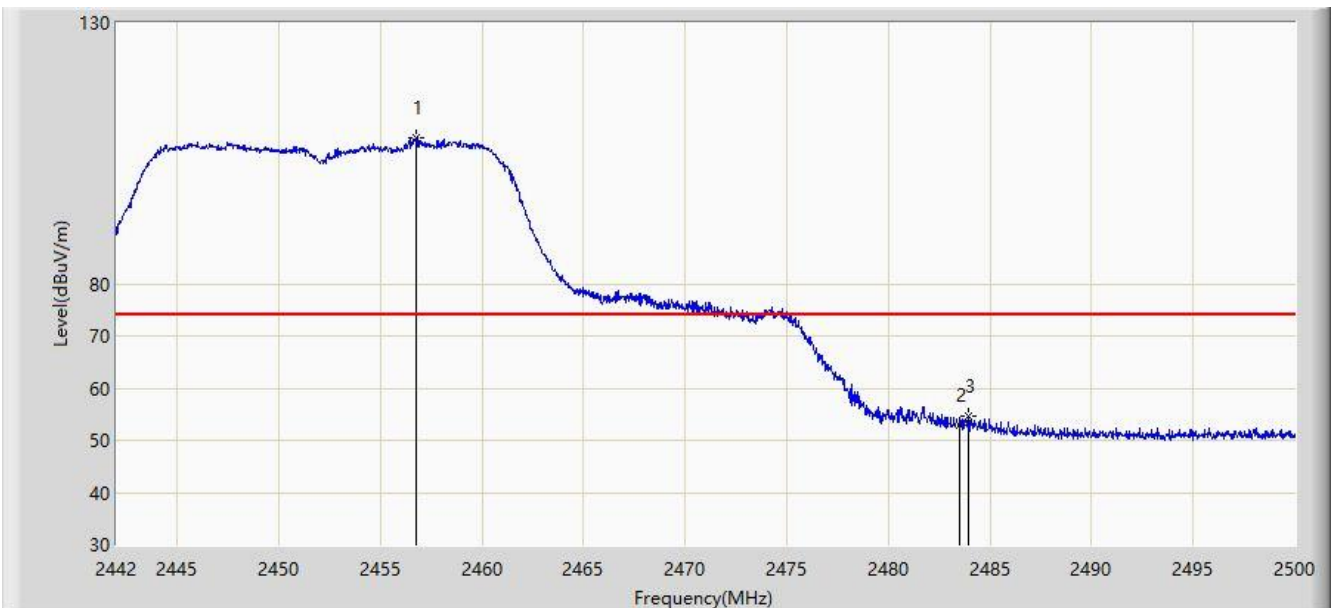


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2456.790	107.946	110.011	N/A	N/A	-2.065	PK
2			2483.500	53.009	55.086	-20.991	74.000	-2.077	PK
3			2483.934	54.600	56.677	-19.400	74.000	-2.077	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/02/28 - 03:06
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AC1300 MU-MIMO 迷你 USB 無線網卡	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11n-HT20 at Channel 2452MHz, Ant 0 + 1	

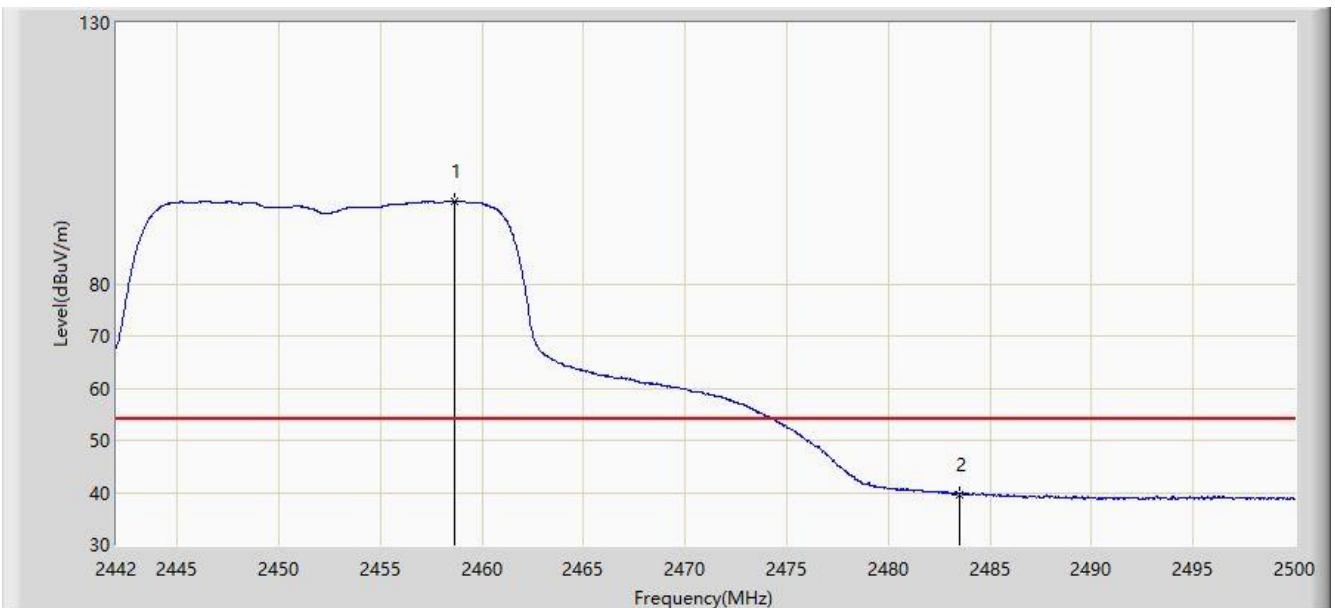


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2458.646	95.822	97.889	N/A	N/A	-2.068	AV
2			2483.500	39.687	41.764	-14.313	54.000	-2.077	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/02/28 - 03:07
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AC1300 MU-MIMO 迷你 USB 無線網卡	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11n-HT20 at Channel 2452MHz, Ant 0 + 1	

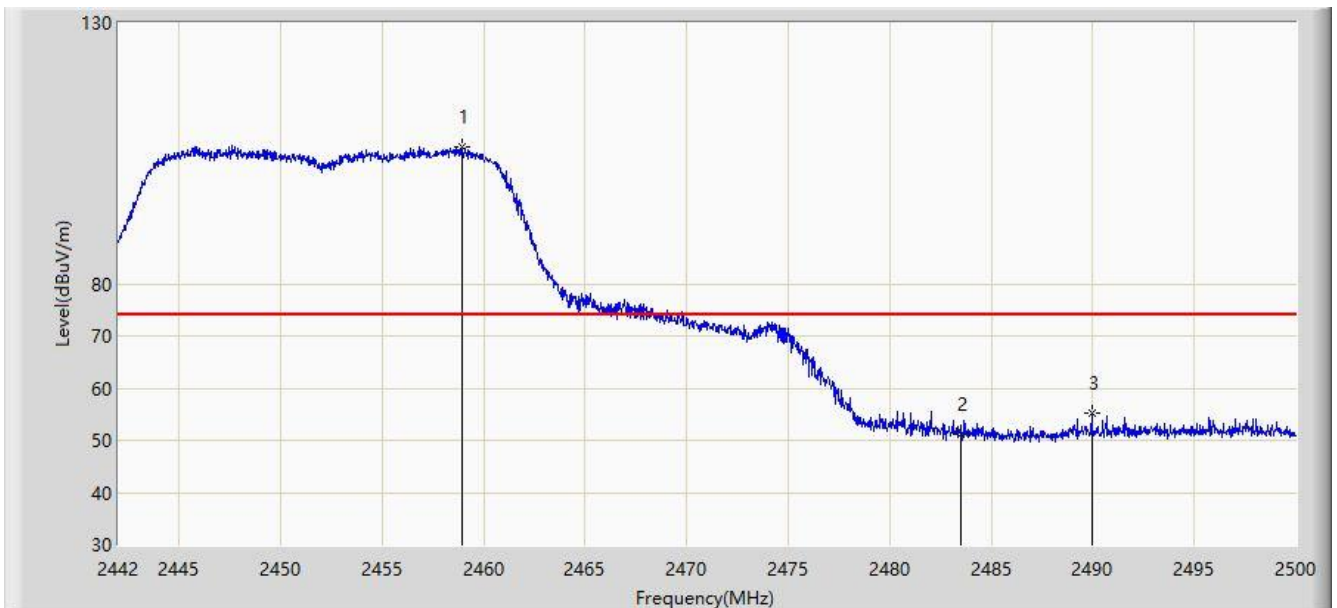


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2458.907	106.120	108.188	N/A	N/A	-2.068	PK
2			2483.500	51.023	53.100	-22.977	74.000	-2.077	PK
3			2489.937	55.092	57.170	-18.908	74.000	-2.078	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/02/28 - 03:11
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AC1300 MU-MIMO 迷你 USB 無線網卡	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11n-HT20 at Channel 2452MHz, Ant 0 + 1	

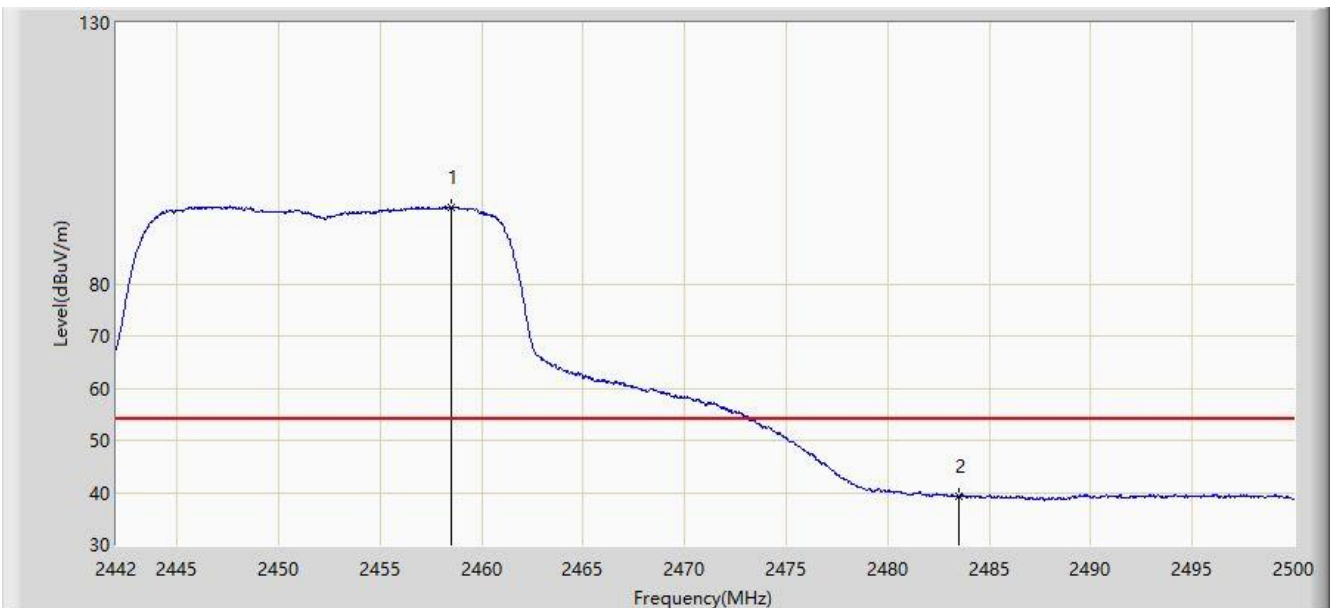


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2458.472	94.766	96.833	N/A	N/A	-2.067	AV
2			2483.500	39.267	41.344	-14.733	54.000	-2.077	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/02/28 - 03:13
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AC1300 MU-MIMO 迷你 USB 無線網卡	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11n-HT20 at Channel 2457MHz, Ant 0 + 1	

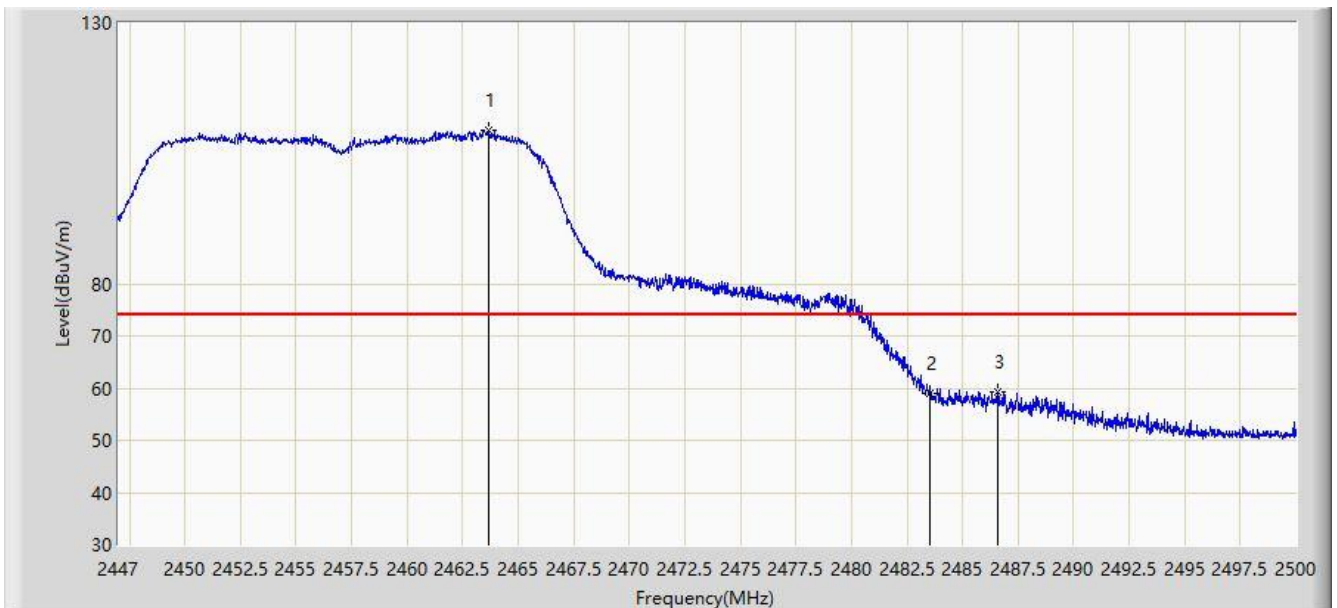


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2463.668	109.471	111.544	N/A	N/A	-2.073	PK
2			2483.500	58.945	61.022	-15.055	74.000	-2.077	PK
3			2486.591	59.338	61.415	-14.662	74.000	-2.077	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/02/28 - 03:16
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AC1300 MU-MIMO 迷你 USB 無線網卡	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11n-HT20 at Channel 2457MHz, Ant 0 + 1	

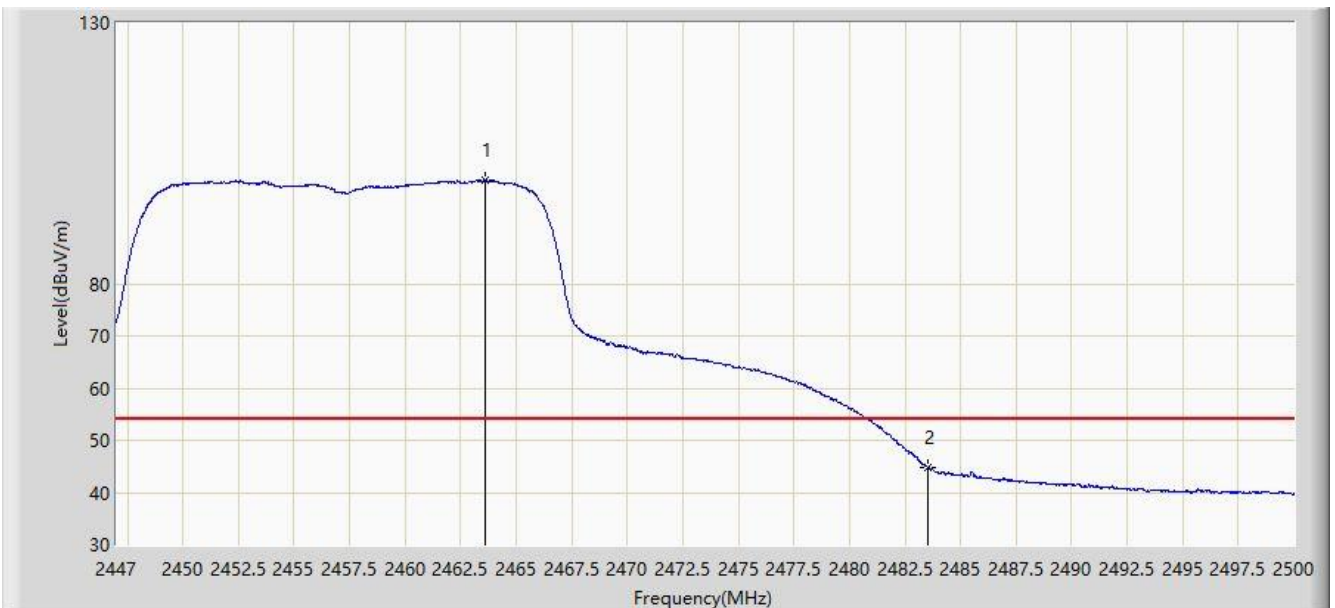


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2463.615	99.747	101.820	N/A	N/A	-2.073	AV
2			2483.500	44.907	46.984	-9.093	54.000	-2.077	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/02/28 - 03:16
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AC1300 MU-MIMO 迷你 USB 無線網卡	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11n-HT20 at Channel 2457MHz, Ant 0 + 1	

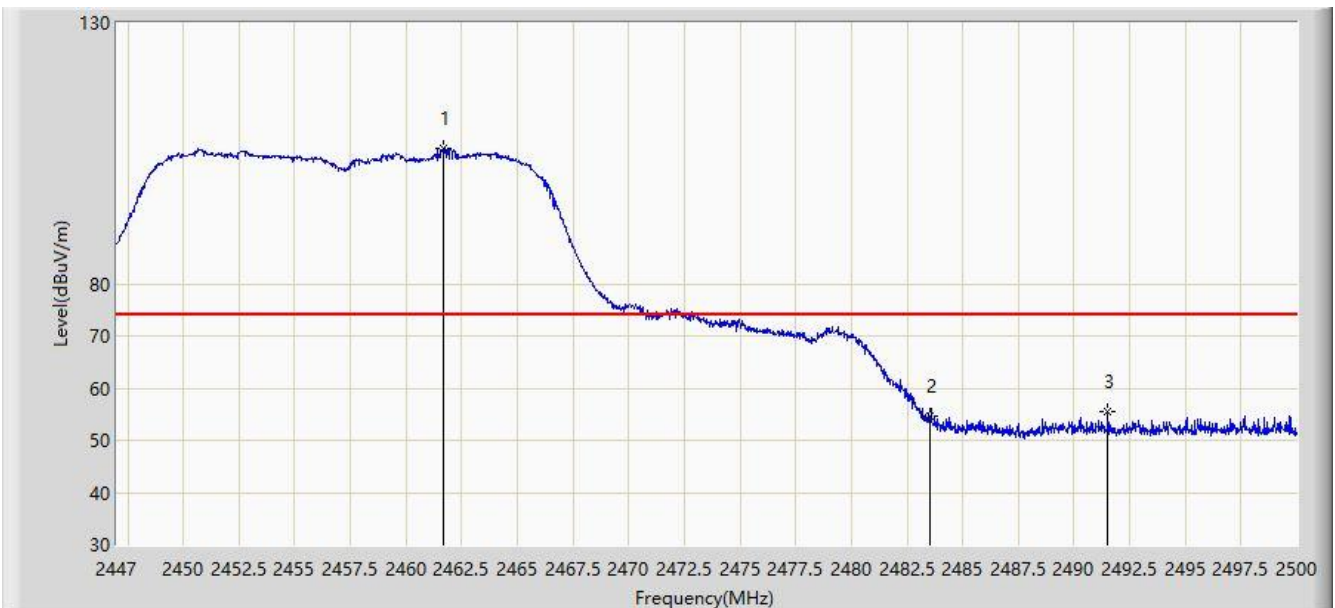


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2461.655	105.960	108.032	N/A	N/A	-2.071	PK
2			2483.500	54.662	56.739	-19.338	74.000	-2.077	PK
3			2491.493	55.519	57.597	-18.481	74.000	-2.078	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/02/28 - 03:18
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AC1300 MU-MIMO 迷你 USB 無線網卡	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11n-HT20 at Channel 2457MHz, Ant 0 + 1	

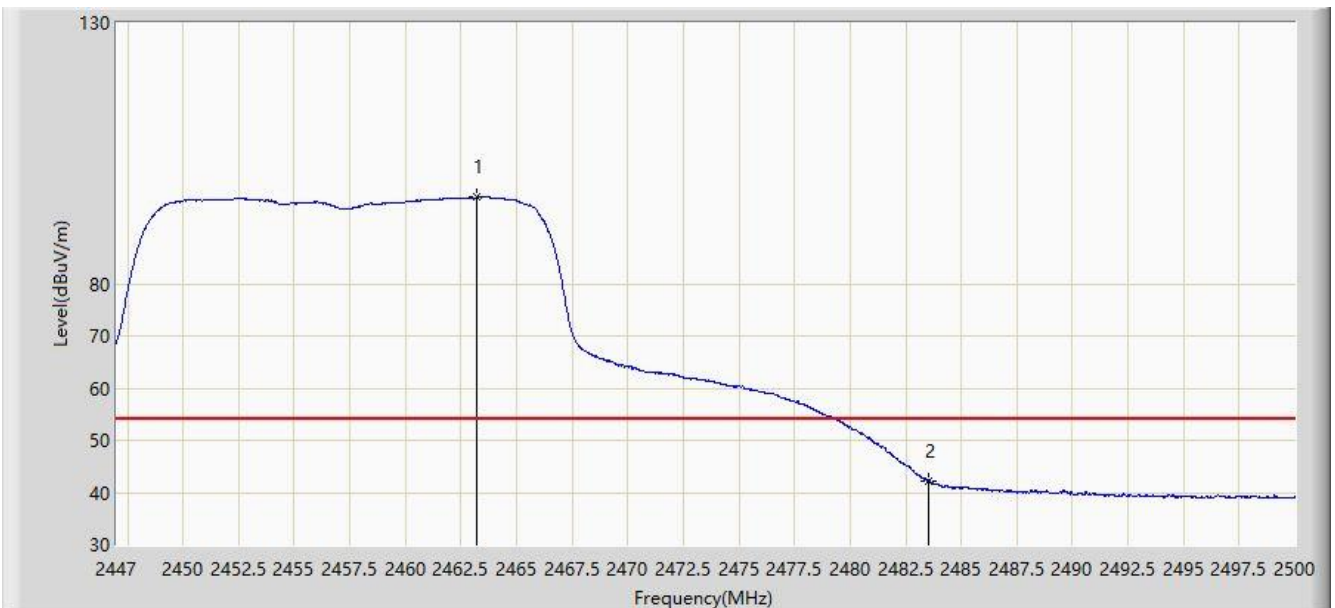


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2463.218	96.625	98.697	N/A	N/A	-2.072	AV
2			2483.500	42.282	44.359	-11.718	54.000	-2.077	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/02/21 - 20:11
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AC1300 MU-MIMO 迷你 USB 無線網卡	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11n-HT20 at Channel 2462MHz, Ant 0 + 1	

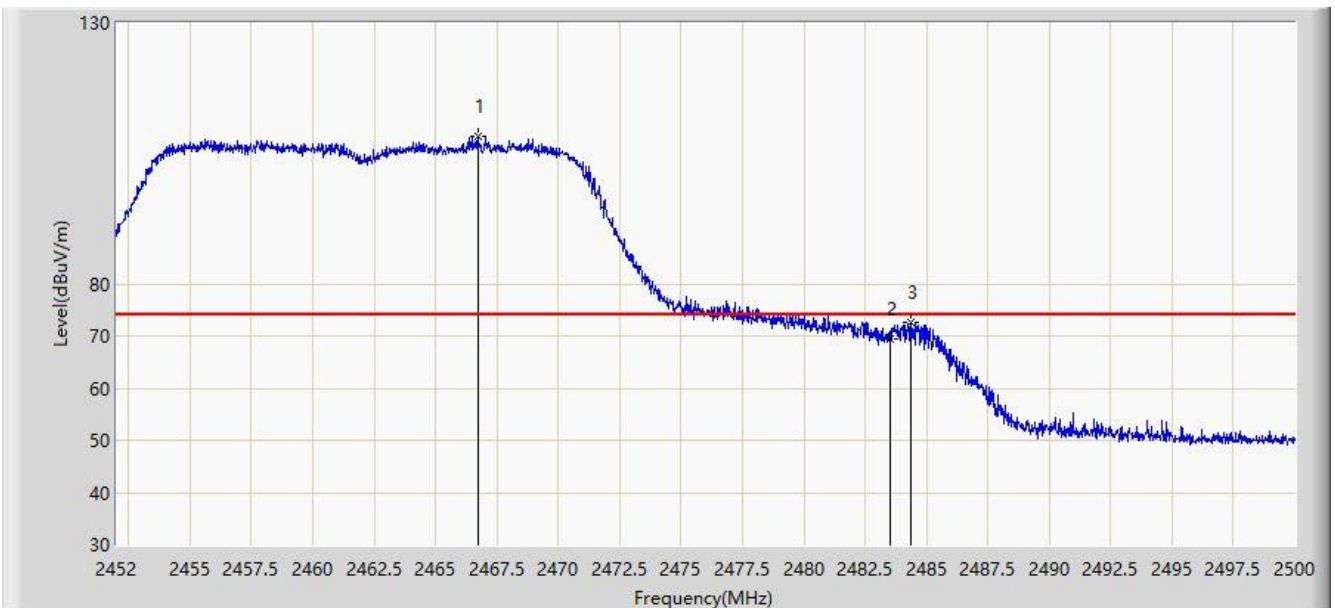


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2466.712	108.397	110.470	N/A	N/A	-2.073	PK
2			2483.500	69.383	71.460	-4.617	74.000	-2.077	PK
3			2484.376	72.681	74.758	-1.319	74.000	-2.077	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/02/21 - 20:06
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AC1300 MU-MIMO 迷你 USB 無線網卡	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11n-HT20 at Channel 2462MHz, Ant 0 + 1	

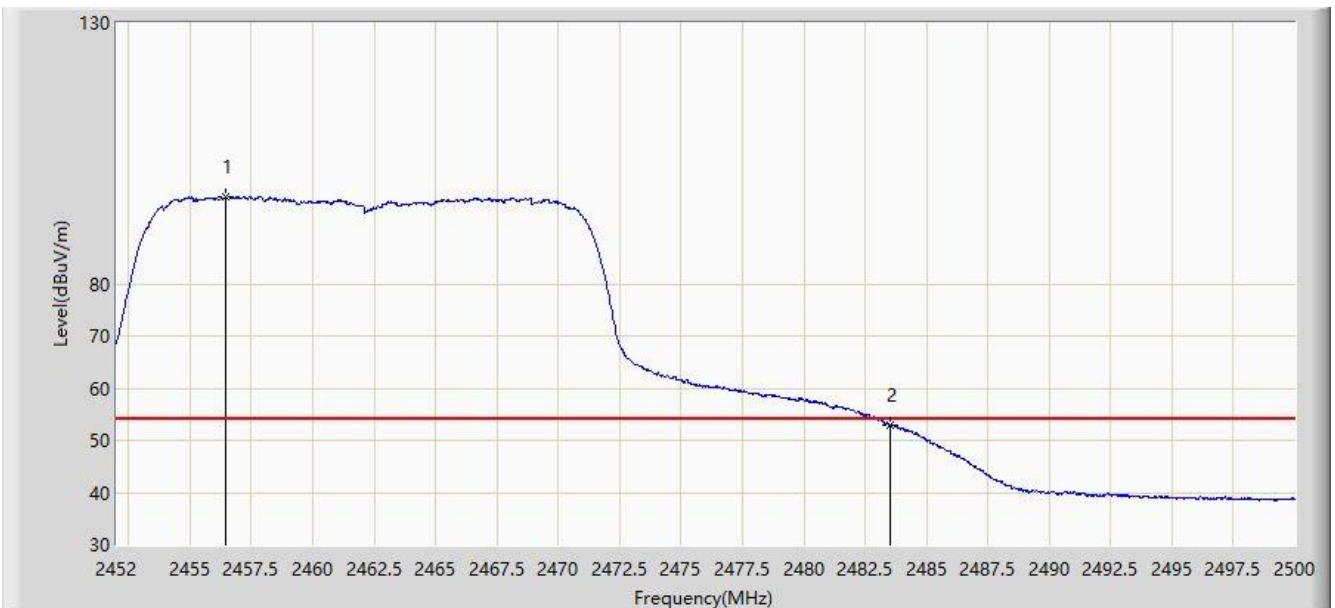


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2456.440	96.618	98.682	N/A	N/A	-2.064	AV
2			2483.500	52.910	54.987	-1.090	54.000	-2.077	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/02/21 - 20:12
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AC1300 MU-MIMO 迷你 USB 無線網卡	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11n-HT20 at Channel 2462MHz, Ant 0 + 1	

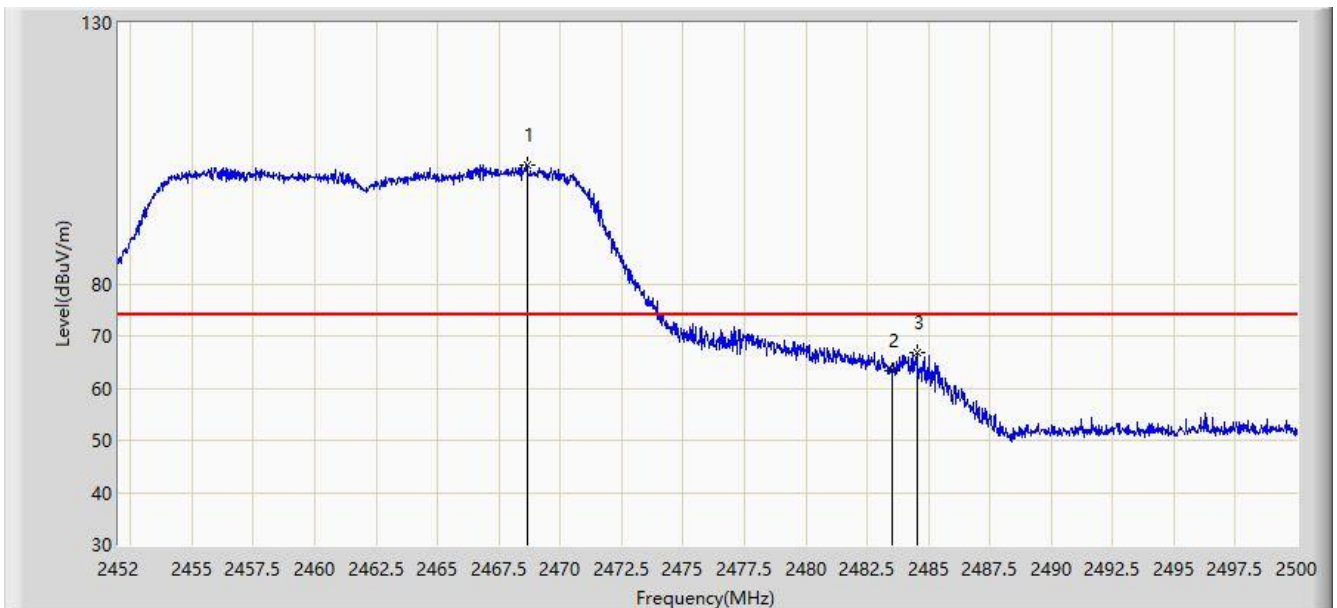


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2468.632	102.702	104.776	N/A	N/A	-2.074	PK
2			2483.500	63.442	65.519	-10.558	74.000	-2.077	PK
3			2484.544	66.925	69.002	-7.075	74.000	-2.077	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/02/21 - 20:13
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AC1300 MU-MIMO 迷你 USB 無線網卡	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11n-HT20 at Channel 2462MHz, Ant 0 + 1	

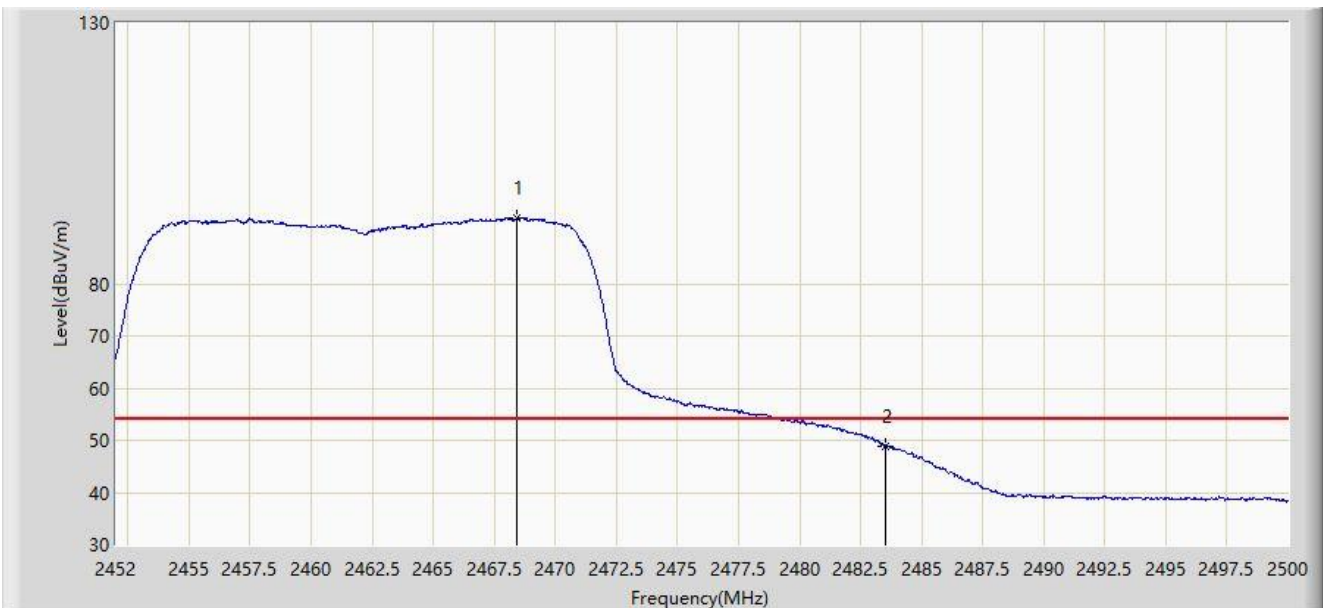


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2468.440	92.647	94.721	N/A	N/A	-2.074	AV
2			2483.500	48.975	51.052	-5.025	54.000	-2.077	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/02/21 - 20:51
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AC1300 MU-MIMO 迷你 USB 無線網卡	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11n-HT40 at Channel 2422MHz, Ant 0 + 1	

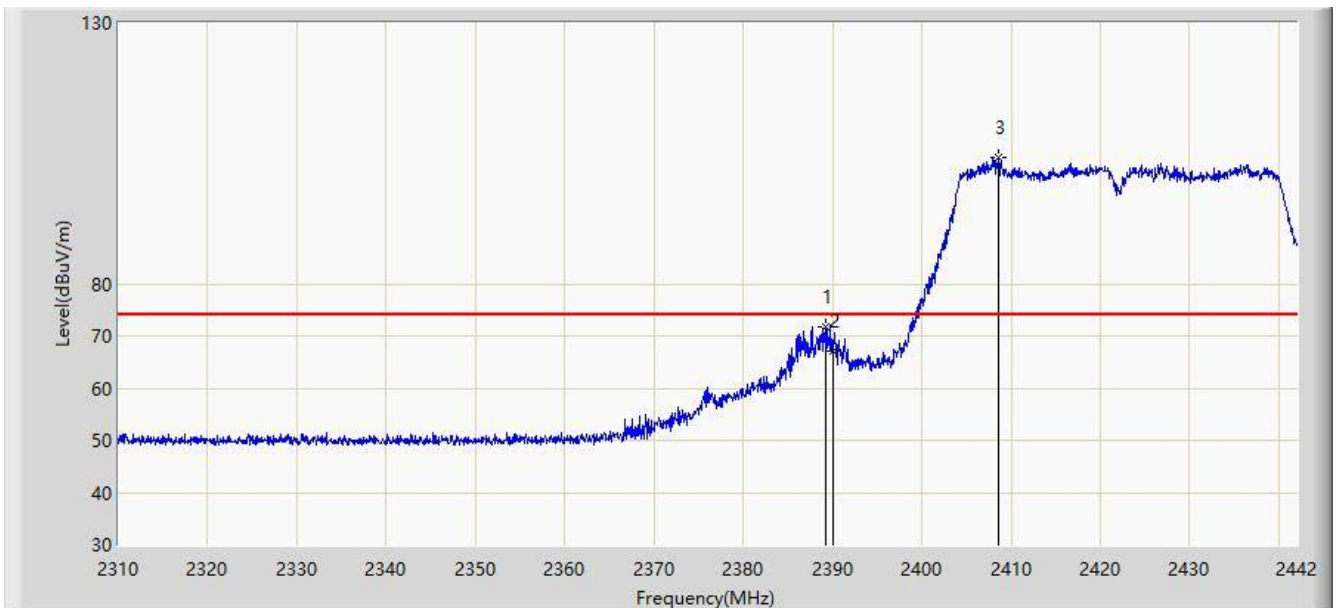


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2389.266	71.862	73.702	-2.138	74.000	-1.840	PK
2			2390.000	67.053	68.895	-6.947	74.000	-1.842	PK
3		*	2408.604	104.150	106.054	N/A	N/A	-1.904	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/02/21 - 20:50
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AC1300 MU-MIMO 迷你 USB 無線網卡	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11n-HT40 at Channel 2422MHz, Ant 0 + 1	

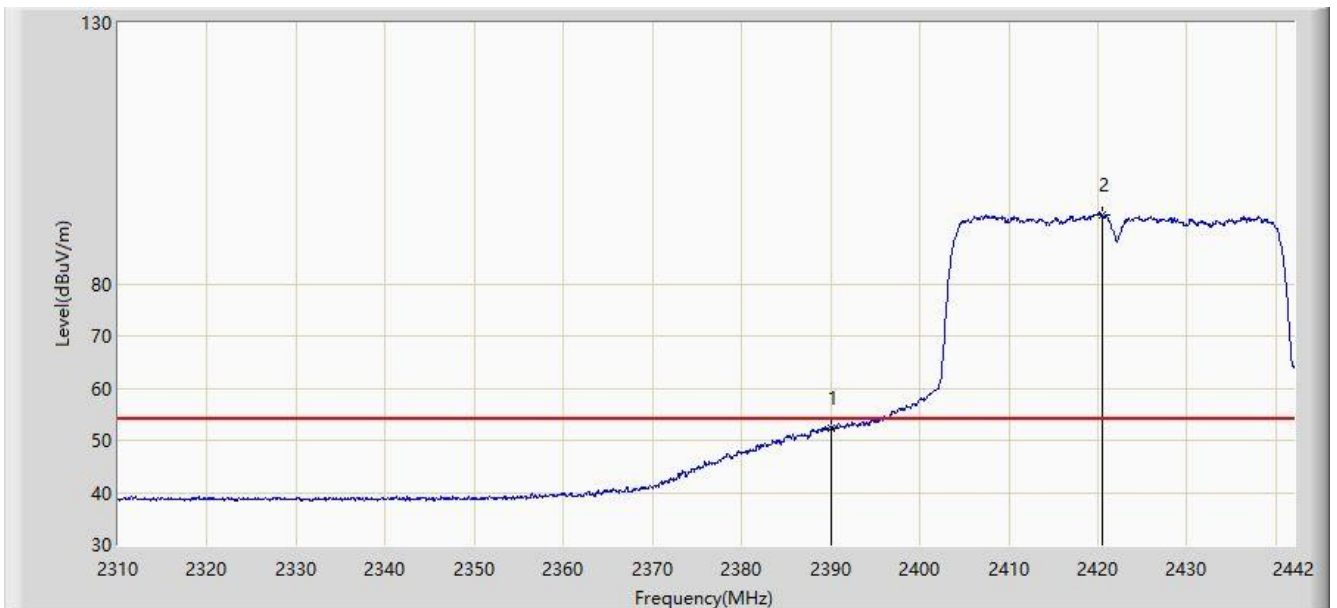


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	52.431	54.273	-1.569	54.000	-1.842	AV
2		*	2420.484	93.277	95.229	N/A	N/A	-1.952	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/02/21 - 20:52
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AC1300 MU-MIMO 迷你 USB 無線網卡	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11n-HT40 at Channel 2422MHz, Ant 0 + 1	

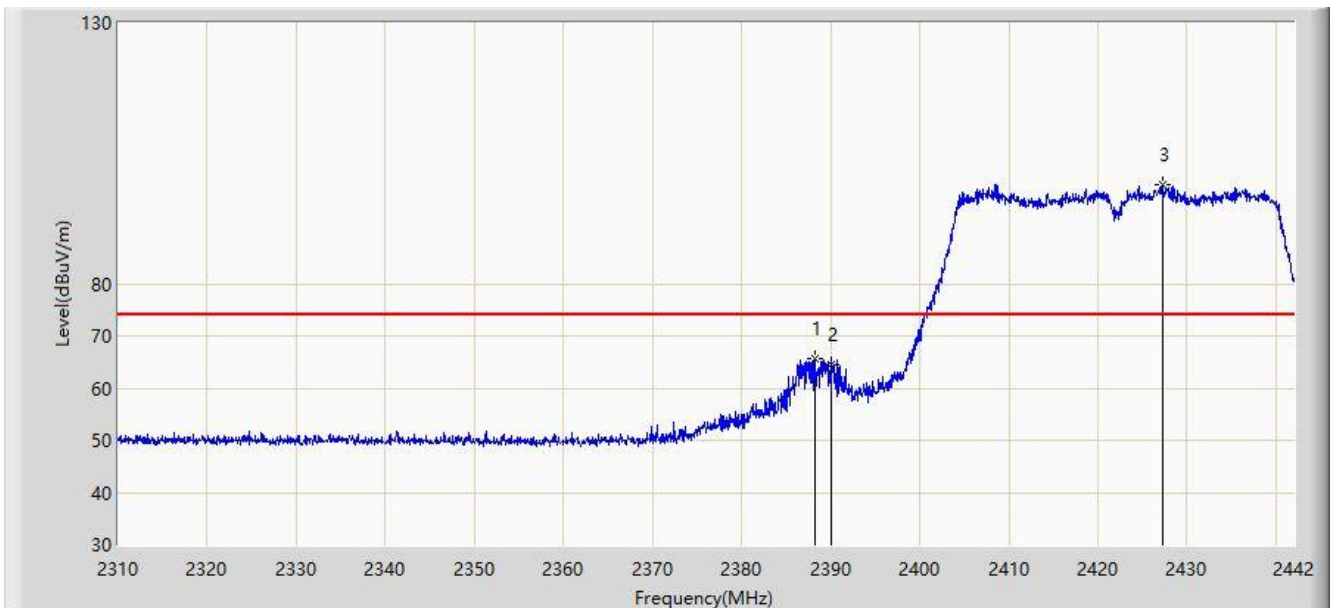


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2388.210	65.566	67.403	-8.434	74.000	-1.837	PK
2			2390.000	64.475	66.317	-9.525	74.000	-1.842	PK
3		*	2427.282	98.883	100.862	N/A	N/A	-1.978	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/02/21 - 20:54
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AC1300 MU-MIMO 迷你 USB 無線網卡	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11n-HT40 at Channel 2422MHz, Ant 0 + 1	

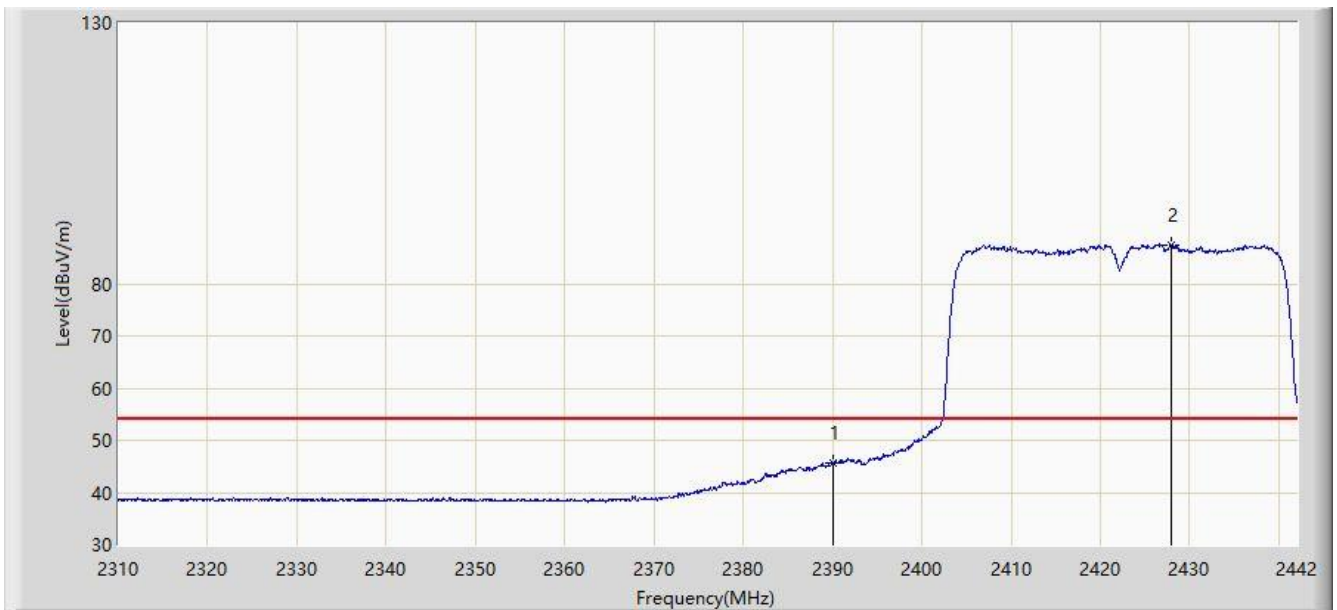


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	45.620	47.462	-8.380	54.000	-1.842	AV
2		*	2427.942	87.384	89.366	N/A	N/A	-1.982	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/02/28 - 03:35
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: AC1300 MU-MIMO 迷你 USB 無線網卡	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11n-HT40 at Channel 2427MHz, Ant 0 + 1	

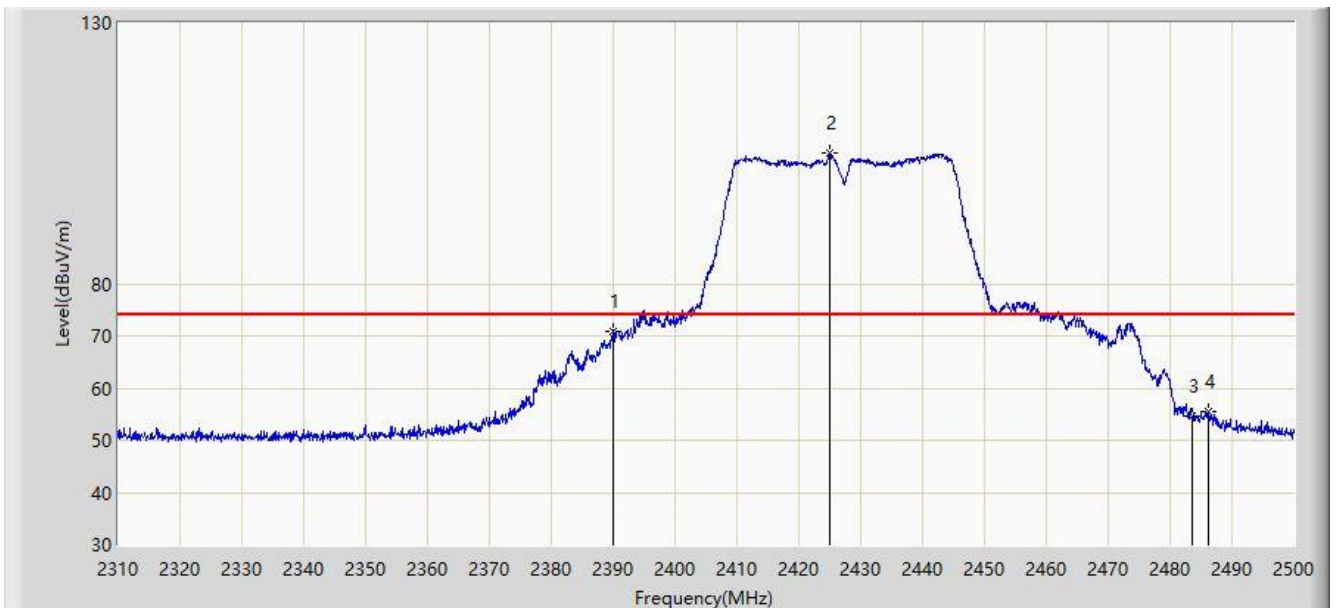


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2389.990	71.154	72.996	-2.846	74.000	-1.842	PK
2		*	2424.950	105.049	107.019	N/A	N/A	-1.970	PK
3			2483.500	54.638	56.715	-19.362	74.000	-2.077	PK
4			2486.130	55.460	57.537	-18.540	74.000	-2.078	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/02/28 - 03:38
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AC1300 MU-MIMO 迷你 USB 無線網卡	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11n-HT40 at Channel 2427MHz, Ant 0 + 1	

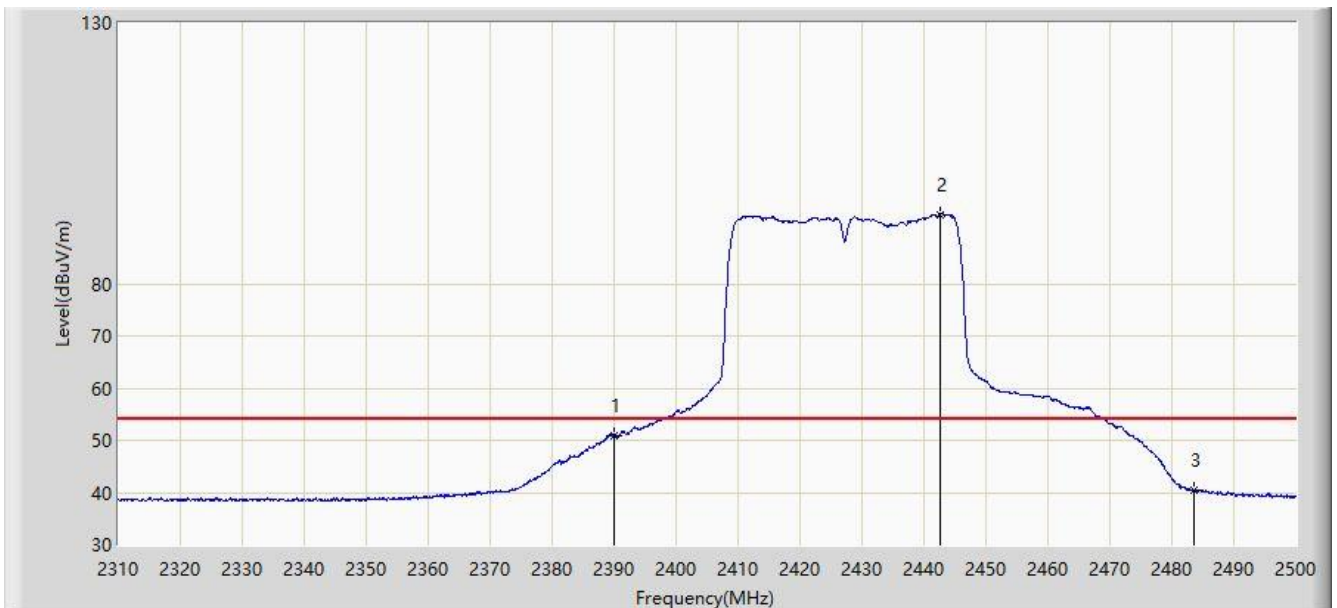


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	50.982	52.824	-3.018	54.000	-1.842	AV
2		*	2442.620	93.262	95.303	N/A	N/A	-2.041	AV
3			2483.500	40.440	42.517	-13.560	54.000	-2.077	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/02/28 - 03:38
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AC1300 MU-MIMO 迷你 USB 無線網卡	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11n-HT40 at Channel 2427MHz, Ant 0 + 1	

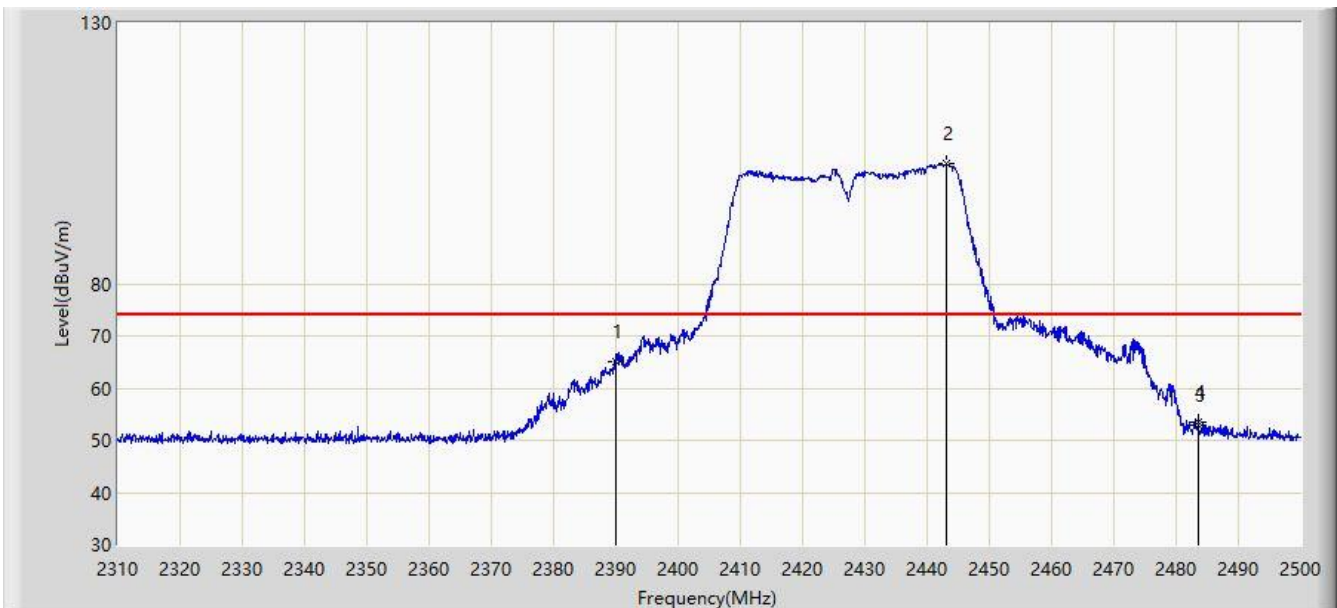


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	65.031	66.873	-8.969	74.000	-1.842	PK
2		*	2443.000	102.904	104.946	N/A	N/A	-2.042	PK
3			2483.500	52.923	55.000	-21.077	74.000	-2.077	PK
4			2483.565	53.382	55.459	-20.618	74.000	-2.077	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/02/28 - 03:39
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AC1300 MU-MIMO 迷你 USB 無線網卡	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11n-HT40 at Channel 2427MHz, Ant 0 + 1	

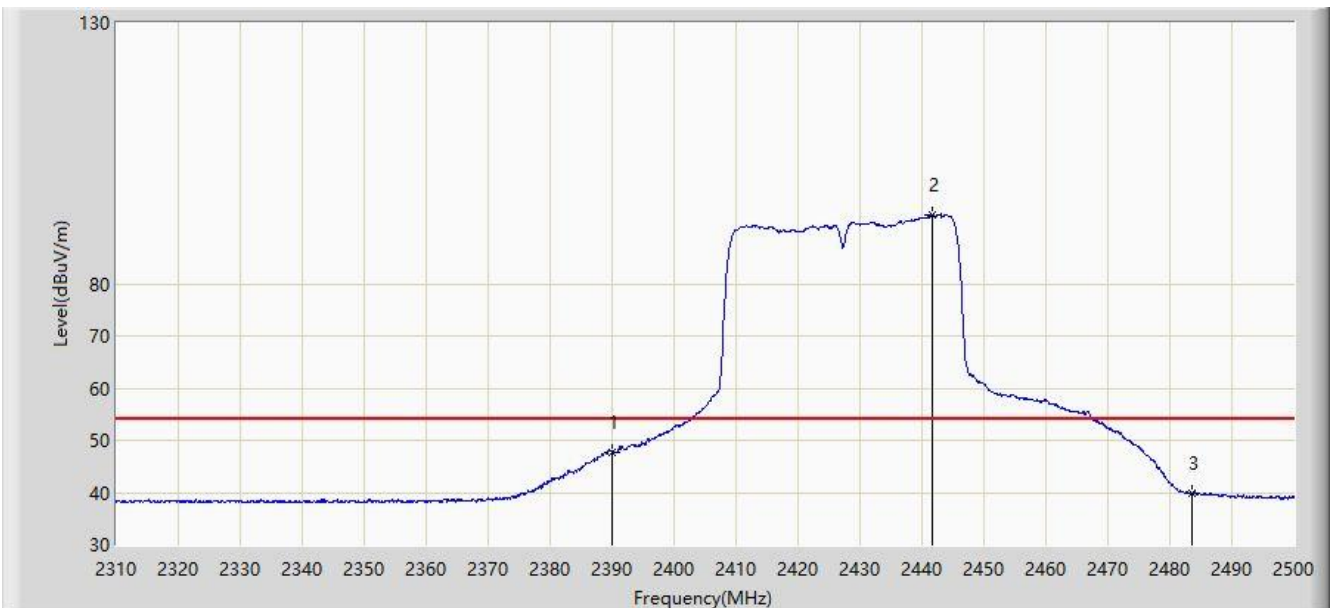

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	47.809	49.651	-6.191	54.000	-1.842	AV
2		*	2441.670	93.224	95.261	N/A	N/A	-2.037	AV
3			2483.500	39.904	41.981	-14.096	54.000	-2.077	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/02/21 - 21:03
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AC1300 MU-MIMO 迷你 USB 無線網卡	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11n-HT40 at Channel 2437MHz, Ant 0 + 1	




No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2387.900	65.319	67.155	-8.681	74.000	-1.835	PK
2			2390.000	62.098	63.940	-11.902	74.000	-1.842	PK
3		*	2423.905	106.113	108.079	N/A	N/A	-1.965	PK
4			2483.500	65.749	67.826	-8.251	74.000	-2.077	PK
5			2485.845	66.129	68.206	-7.871	74.000	-2.078	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/02/21 - 21:02
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AC1300 MU-MIMO 迷你 USB 無線網卡	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11n-HT40 at Channel 2437MHz, Ant 0 + 1	

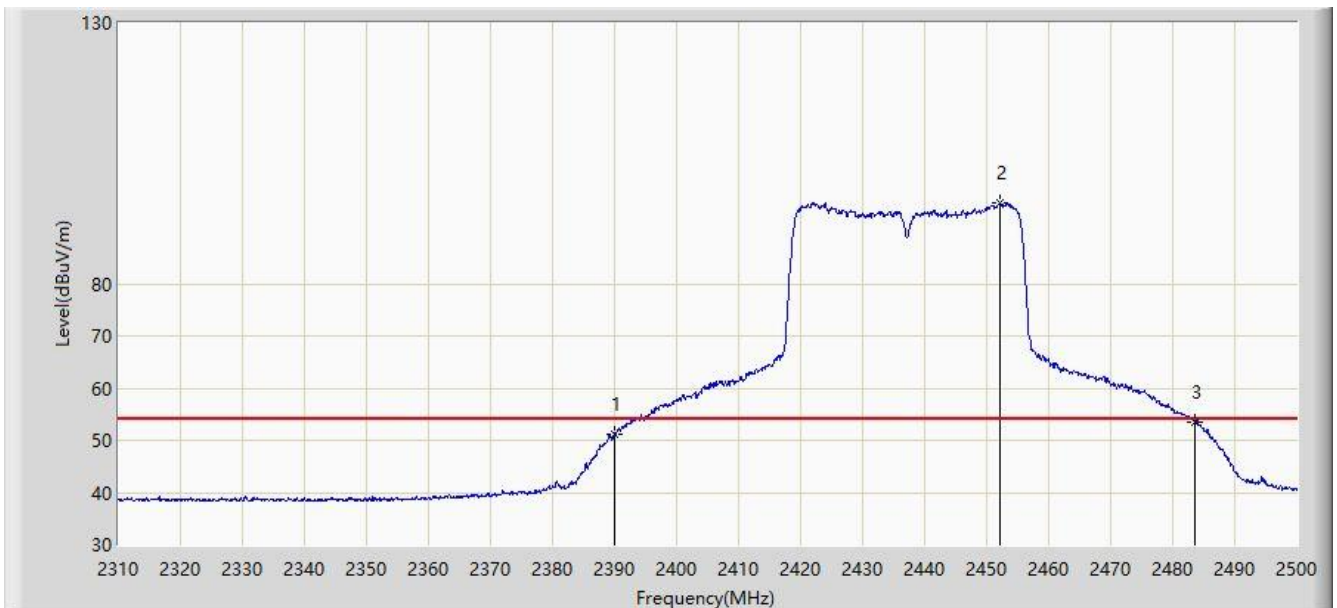


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	51.037	52.879	-2.963	54.000	-1.842	AV
2		*	2452.120	95.411	97.469	N/A	N/A	-2.058	AV
3			2483.500	53.437	55.514	-0.563	54.000	-2.077	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/02/21 - 21:04
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AC1300 MU-MIMO 迷你 USB 無線網卡	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11n-HT40 at Channel 2437MHz, Ant 0 + 1	

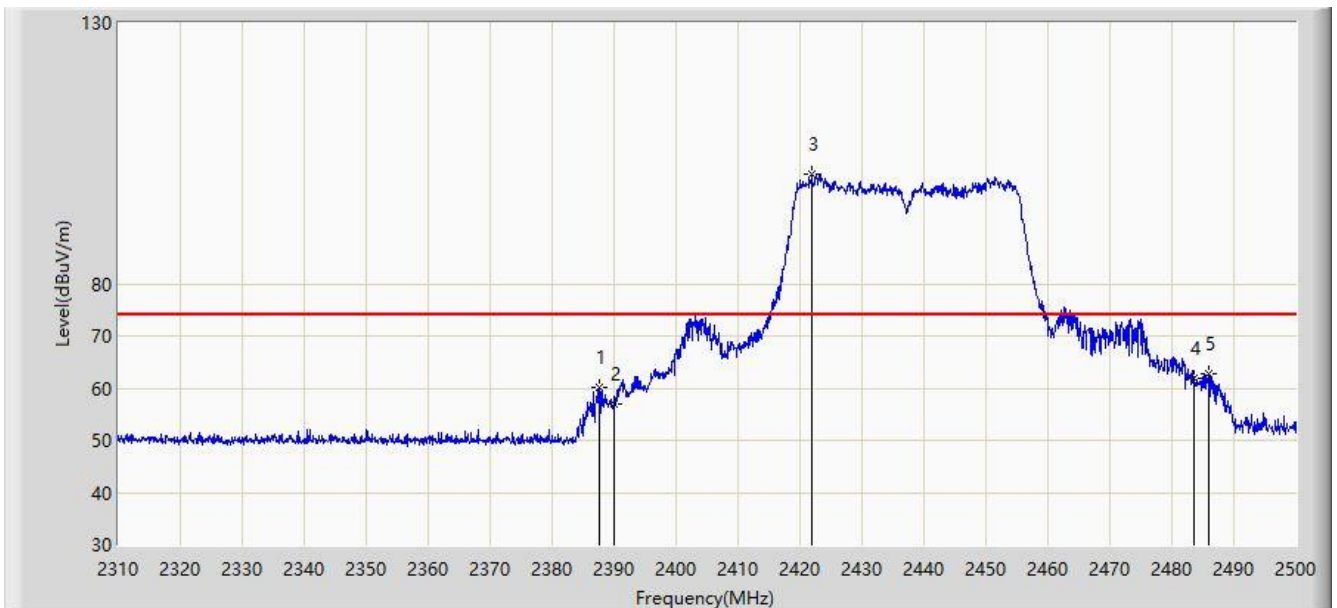


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2387.710	60.061	61.897	-13.939	74.000	-1.836	PK
2			2390.000	56.833	58.675	-17.167	74.000	-1.842	PK
3		*	2421.910	100.982	102.939	N/A	N/A	-1.957	PK
4			2483.500	61.787	63.864	-12.213	74.000	-2.077	PK
5			2485.940	62.880	64.957	-11.120	74.000	-2.077	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/02/21 - 21:06
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AC1300 MU-MIMO 迷你 USB 無線網卡	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11n-HT40 at Channel 2437MHz, Ant 0 + 1	

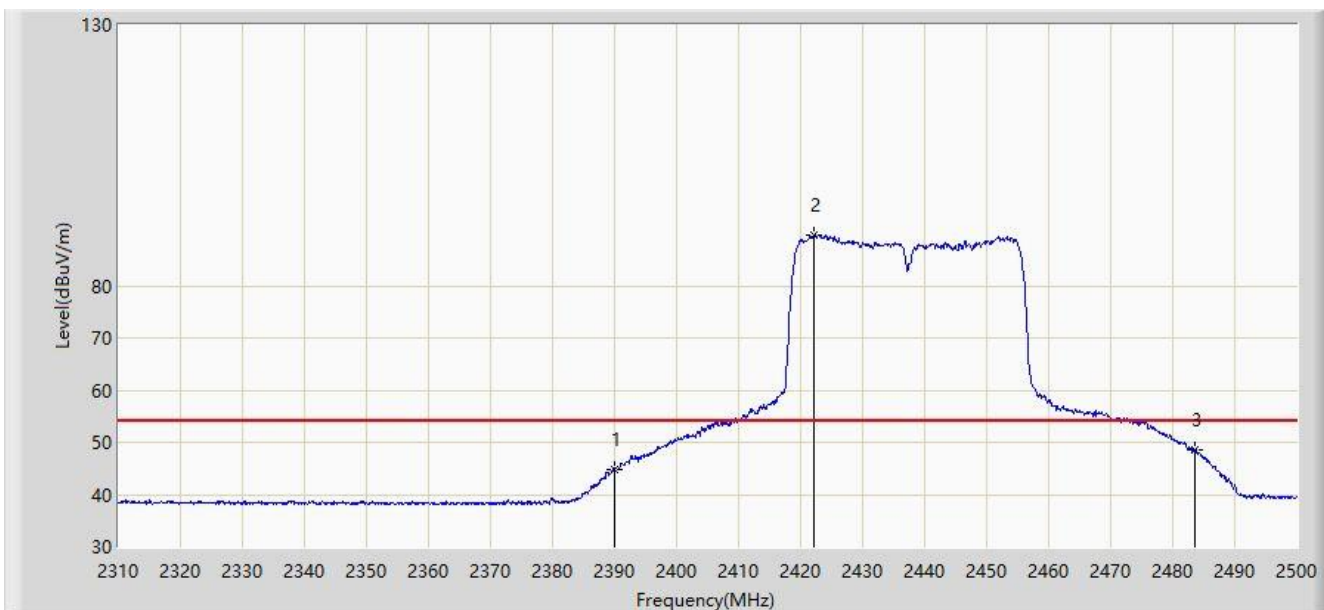


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	44.663	46.505	-9.337	54.000	-1.842	AV
2		*	2422.195	89.834	91.793	N/A	N/A	-1.959	AV
3			2483.500	48.464	50.541	-5.536	54.000	-2.077	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

aSite: AC1	Time: 2019/02/28 - 03:47
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AC1300 MU-MIMO 迷你 USB 無線網卡	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11n-HT40 at Channel 2447MHz, Ant 0 + 1	

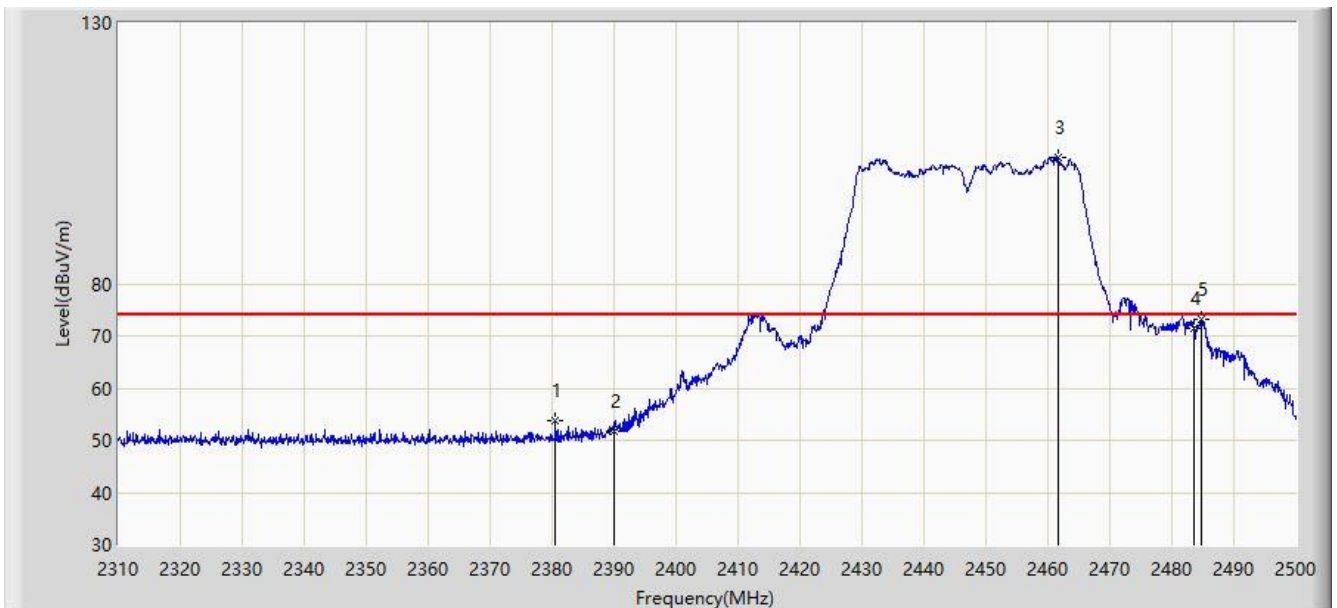


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2380.585	53.666	55.482	-20.334	74.000	-1.815	PK
2			2390.000	51.661	53.503	-22.339	74.000	-1.842	PK
3		*	2461.620	104.228	106.300	N/A	N/A	-2.071	PK
4			2483.500	71.502	73.579	-2.498	74.000	-2.077	PK
5			2484.800	73.288	75.365	-0.712	74.000	-2.076	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/02/28 - 03:48
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AC1300 MU-MIMO 迷你 USB 無線網卡	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11n-HT40 at Channel 2447MHz, Ant 0 + 1	

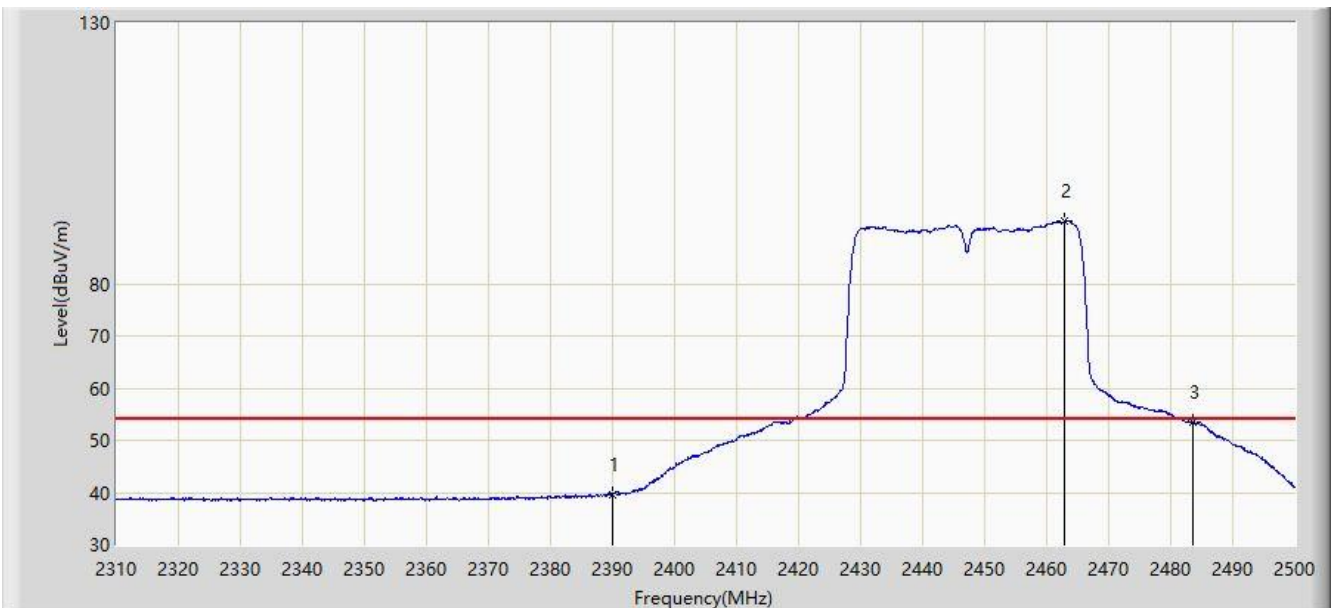


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	39.667	41.509	-14.333	54.000	-1.842	AV
2		*	2462.855	91.961	94.033	N/A	N/A	-2.072	AV
3			2483.500	53.554	55.631	-0.446	54.000	-2.077	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/02/28 - 03:49
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AC1300 MU-MIMO 迷你 USB 無線網卡	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11n-HT40 at Channel 2447MHz, Ant 0 + 1	

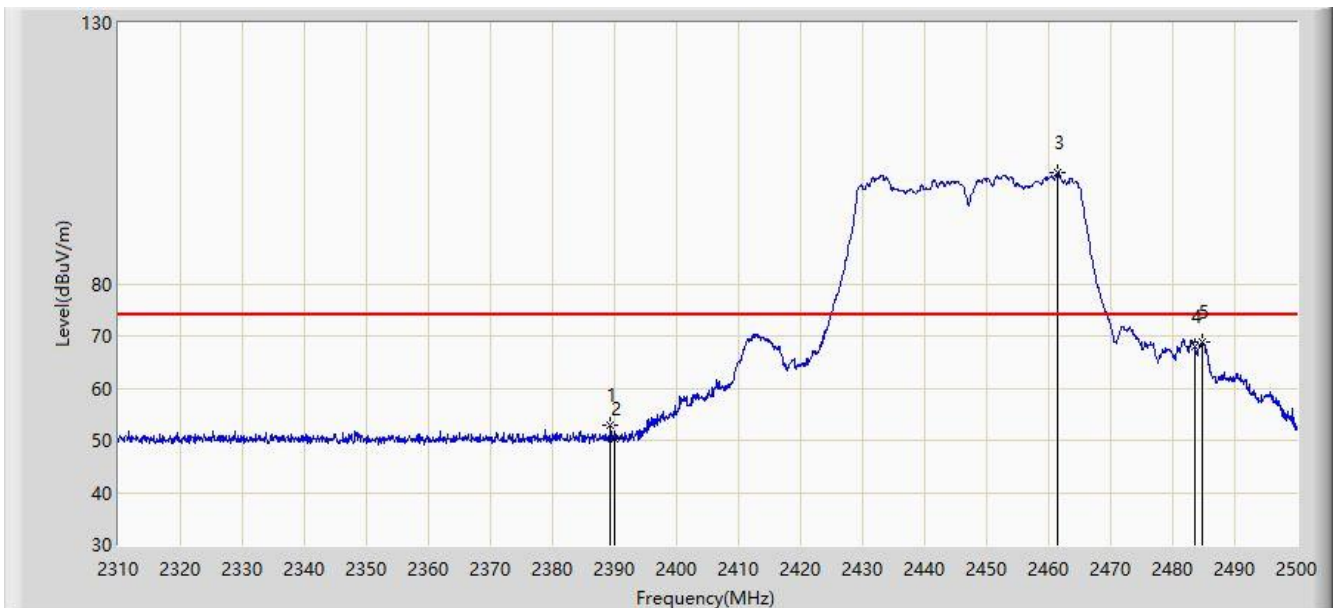


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2389.325	52.829	54.669	-21.171	74.000	-1.840	PK
2			2390.000	50.400	52.242	-23.600	74.000	-1.842	PK
3		*	2461.430	101.320	N/A	N/A	74.000	-2.071	PK
4			2483.500	67.991	70.068	-6.009	74.000	-2.077	PK
5			2484.800	68.933	71.010	-5.067	74.000	-2.076	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/02/28 - 03:50
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AC1300 MU-MIMO 迷你 USB 無線網卡	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11n-HT40 at Channel 2447MHz, Ant 0 + 1	

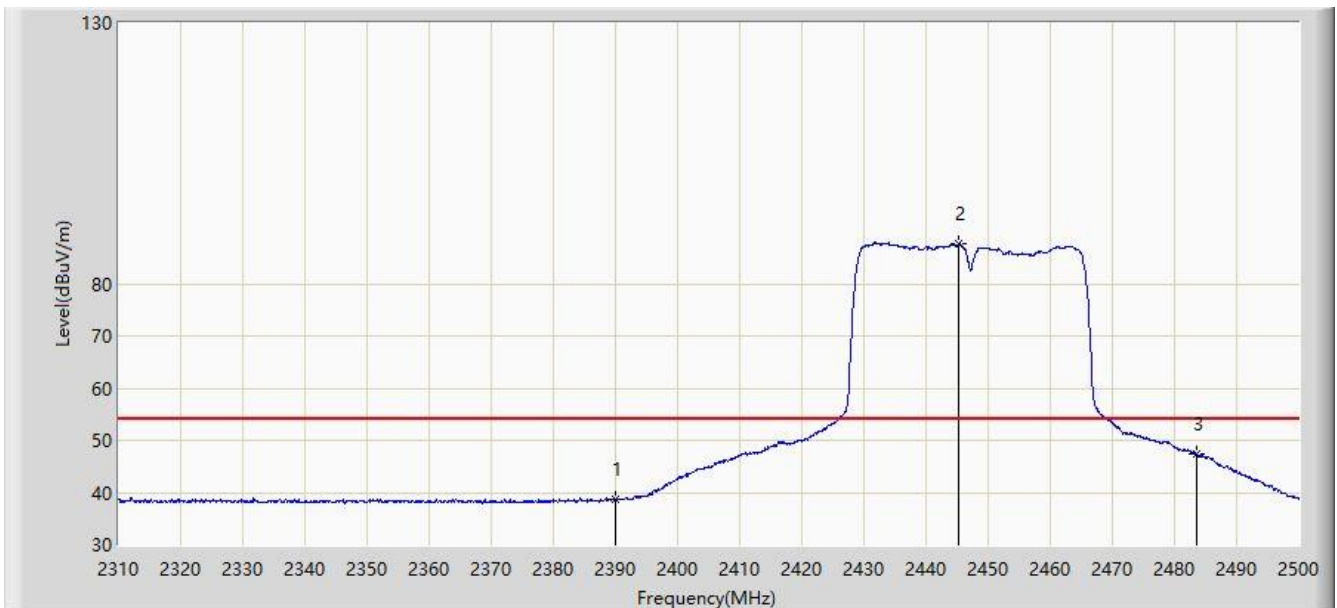


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	38.670	40.512	-15.330	54.000	-1.842	AV
2		*	2445.280	87.629	89.680	N/A	N/A	-2.050	AV
3			2483.500	47.362	49.439	-6.638	54.000	-2.077	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/02/21 - 21:13
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AC1300 MU-MIMO 迷你 USB 無線網卡	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11n-HT40 at Channel 2452MHz, Ant 0 + 1	

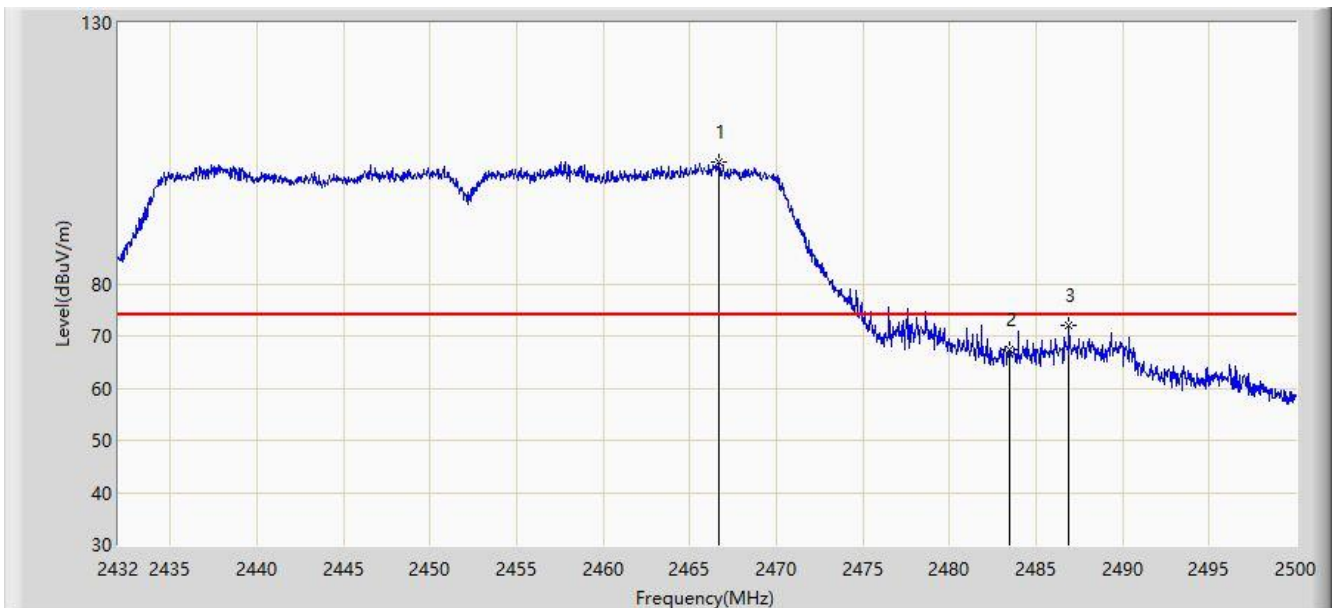


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2466.646	103.466	105.539	N/A	N/A	-2.073	PK
2			2483.500	67.388	69.465	-6.612	74.000	-2.077	PK
3			2486.910	71.910	73.987	-2.090	74.000	-2.078	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/02/21 - 21:12
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AC1300 MU-MIMO 迷你 USB 無線網卡	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11n-HT40 at Channel 2452MHz, Ant 0 + 1	

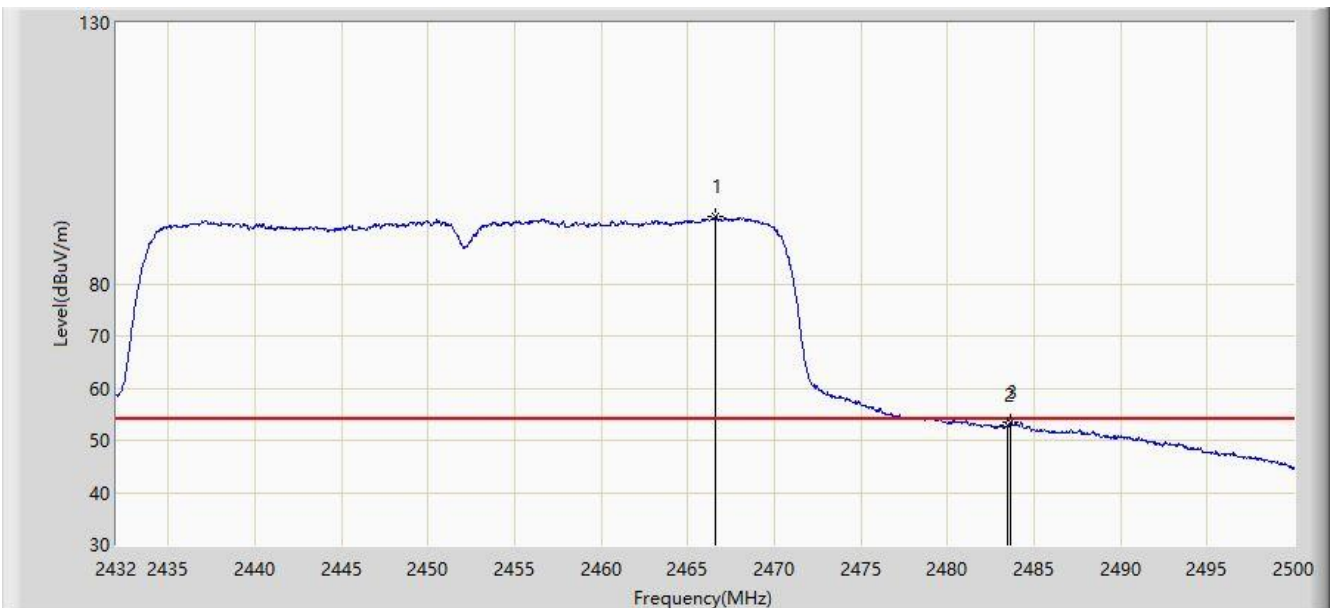


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2466.612	92.963	95.036	N/A	N/A	-2.073	AV
2			2483.500	52.827	54.904	-1.173	54.000	-2.077	AV
3			2483.680	53.583	55.660	-0.417	54.000	-2.076	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/02/21 - 21:13
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AC1300 MU-MIMO 迷你 USB 無線網卡	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11n-HT40 at Channel 2452MHz, Ant 0 + 1	

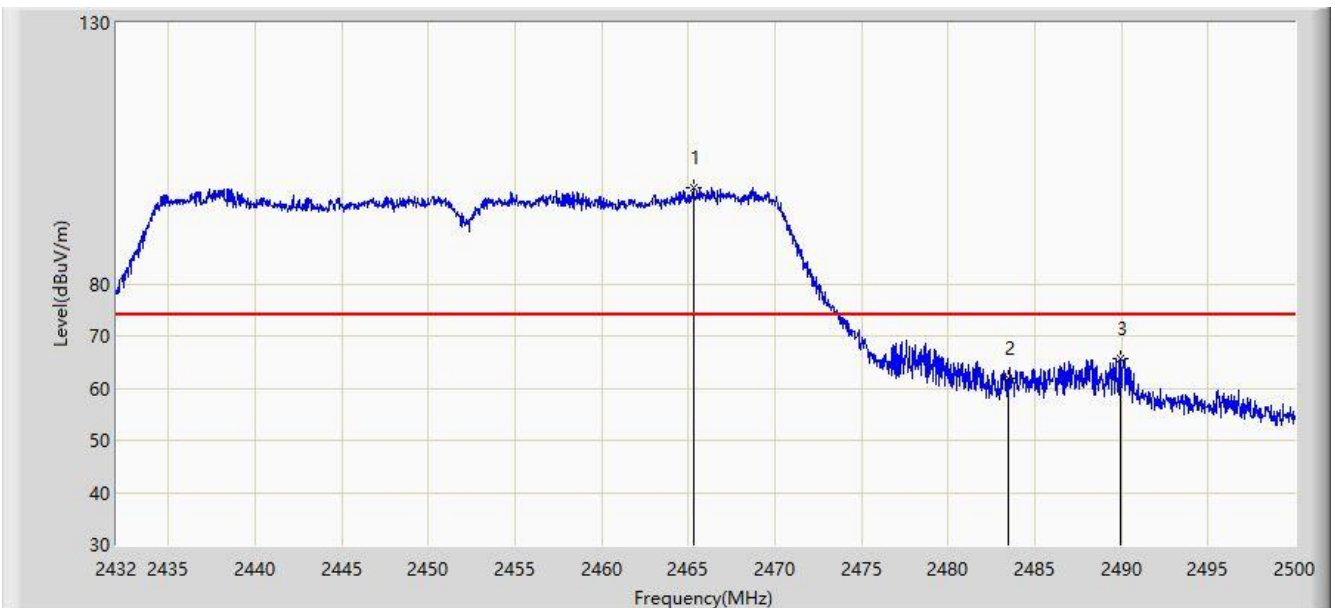


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2465.286	98.422	100.495	N/A	N/A	-2.073	PK
2			2483.500	61.789	63.866	-12.211	74.000	-2.077	PK
3			2489.936	65.715	67.793	-8.285	74.000	-2.078	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/02/21 - 21:14
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AC1300 MU-MIMO 迷你 USB 無線網卡	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11n-HT40 at Channel 2452MHz, Ant 0 + 1	

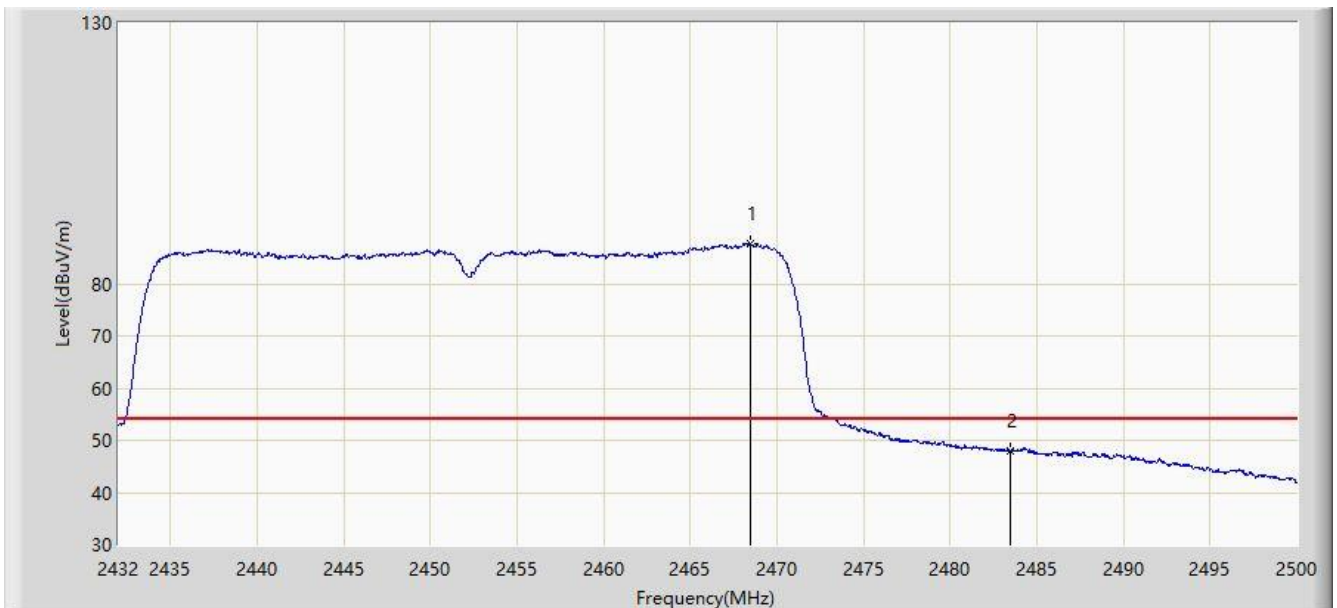

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2468.448	87.642	89.716	N/A	N/A	-2.074	AV
2			2483.500	47.956	50.033	-6.044	54.000	-2.077	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/02/21 - 21:25
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AC1300 MU-MIMO 迷你 USB 無線網卡	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11-VHT20 at Channel 2412MHz, Ant 0 + 1	




No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2389.912	66.718	68.560	-7.282	74.000	-1.841	PK
2			2390.000	65.757	67.599	-8.243	74.000	-1.842	PK
3		*	2417.968	108.414	110.356	N/A	N/A	-1.942	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/02/21 - 21:24
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AC1300 MU-MIMO 迷你 USB 無線網卡	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11-VHT20 at Channel 2412MHz, Ant 0 + 1	

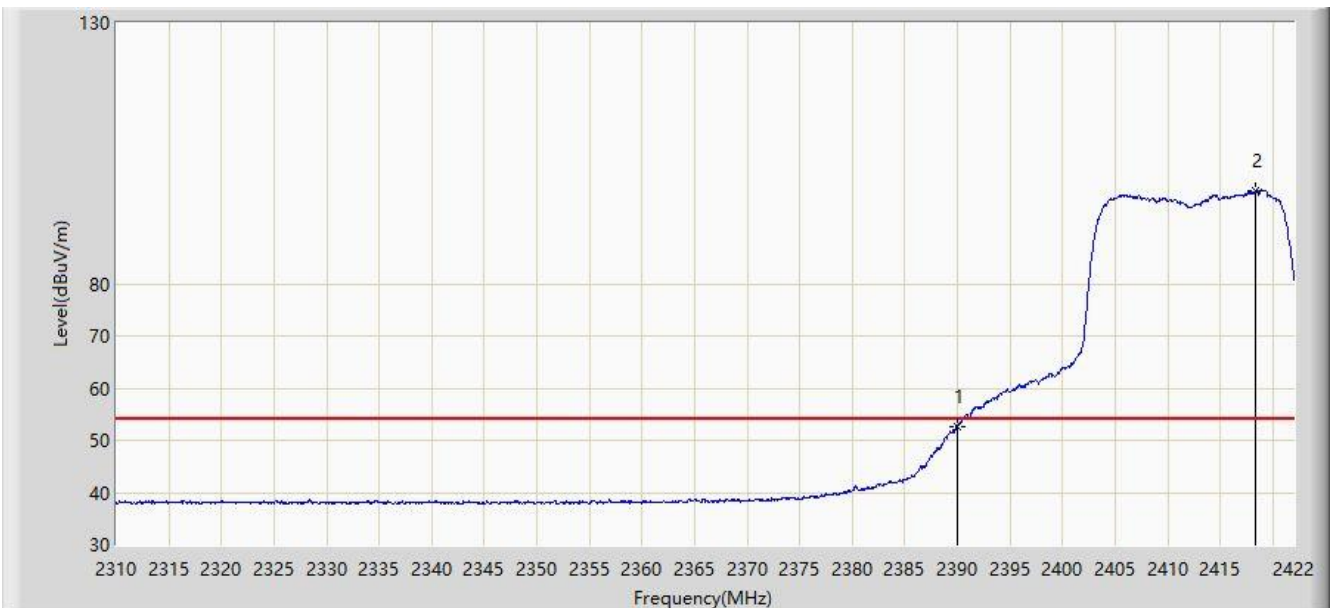

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	52.737	54.579	-1.263	54.000	-1.842	AV
2		*	2418.416	97.898	99.842	N/A	N/A	-1.944	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/02/21 - 21:26
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AC1300 MU-MIMO 迷你 USB 無線網卡	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11-VHT20 at Channel 2412MHz, Ant 0 + 1	




No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2389.968	62.349	64.191	-11.651	74.000	-1.842	PK
2			2390.000	61.610	63.452	-12.390	74.000	-1.842	PK
3		*	2417.688	103.380	105.321	N/A	N/A	-1.941	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/02/21 - 21:27
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AC1300 MU-MIMO 迷你 USB 無線網卡	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11-VHT20 at Channel 2412MHz, Ant 0 + 1	

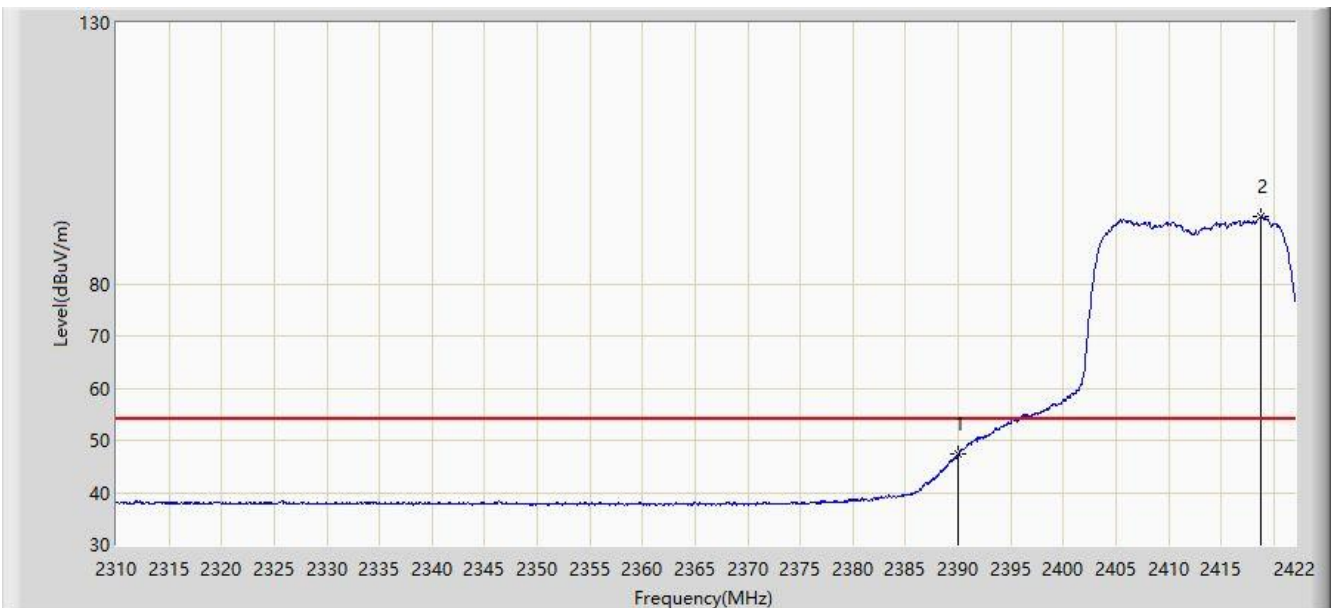


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	47.249	49.091	-6.751	54.000	-1.842	AV
2		*	2418.808	93.035	94.980	N/A	N/A	-1.946	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/02/28 - 03:51
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AC1300 MU-MIMO 迷你 USB 無線網卡	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11-VHT20 at Channel 2417MHz, Ant 0 + 1	

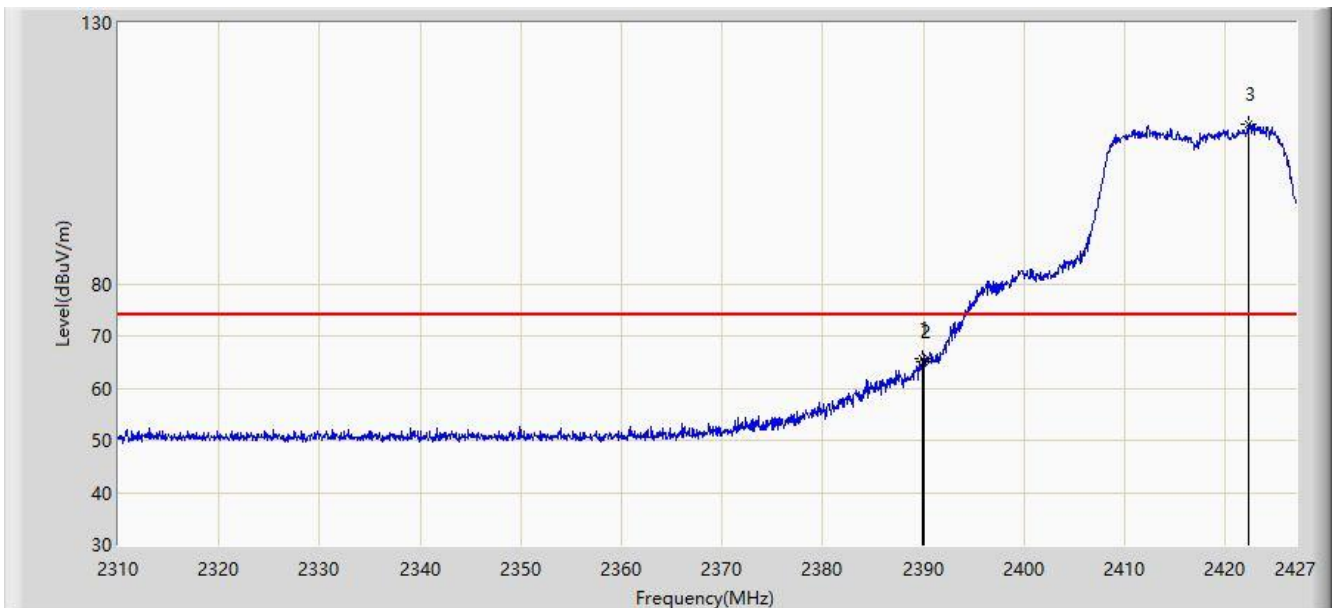


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2389.911	65.516	67.358	-8.484	74.000	-1.841	PK
2			2390.000	65.101	66.943	-8.899	74.000	-1.842	PK
3		*	2422.378	110.650	112.609	N/A	N/A	-1.959	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/02/28 - 03:55
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AC1300 MU-MIMO 迷你 USB 無線網卡	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11-VHT20 at Channel 2417MHz, Ant 0 + 1	

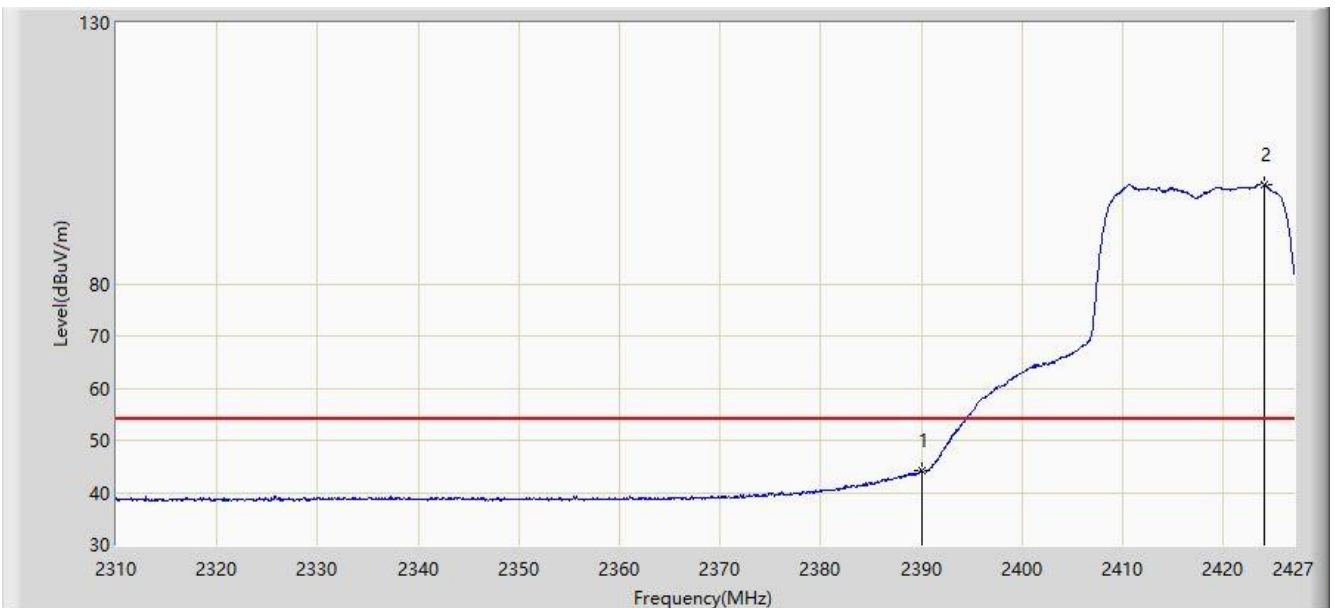


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	44.097	45.939	-9.903	54.000	-1.842	AV
2		*	2424.017	99.114	101.080	N/A	N/A	-1.965	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/02/28 - 03:55
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AC1300 MU-MIMO 迷你 USB 無線網卡	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11-VHT20 at Channel 2417MHz, Ant 0 + 1	

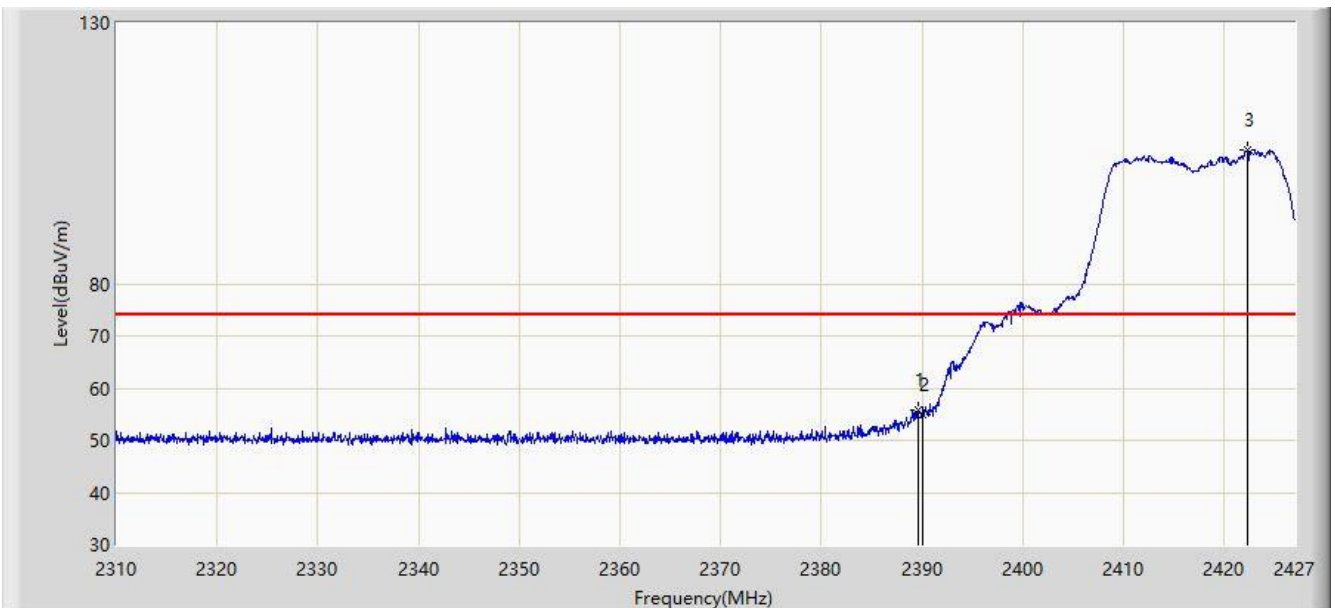


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2389.677	55.759	57.600	-18.241	74.000	-1.841	PK
2			2390.000	55.043	56.885	-18.957	74.000	-1.842	PK
3		*	2422.261	105.640	107.599	N/A	N/A	-1.958	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/02/28 - 03:56
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AC1300 MU-MIMO 迷你 USB 無線網卡	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11-VHT20 at Channel 2417MHz, Ant 0 + 1	

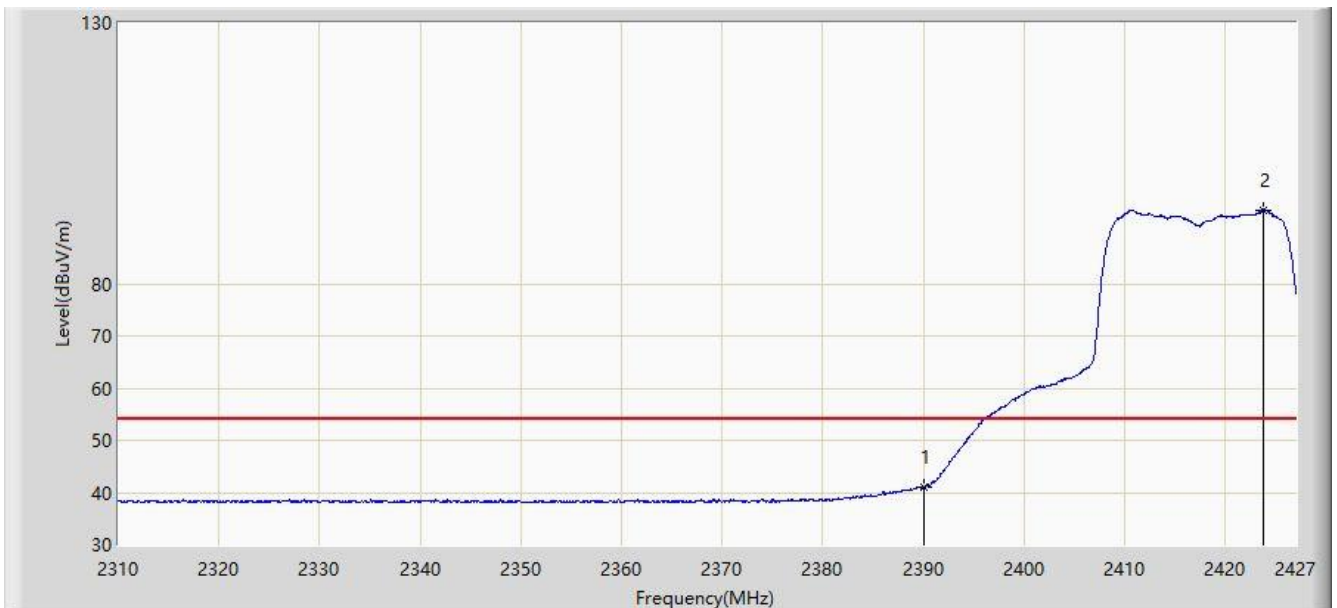


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	41.067	42.909	-12.933	54.000	-1.842	AV
2		*	2423.724	94.177	96.142	N/A	N/A	-1.965	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/02/28 - 03:57
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AC1300 MU-MIMO 迷你 USB 無線網卡	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11-VHT20 at Channel 2422MHz, Ant 0 + 1	

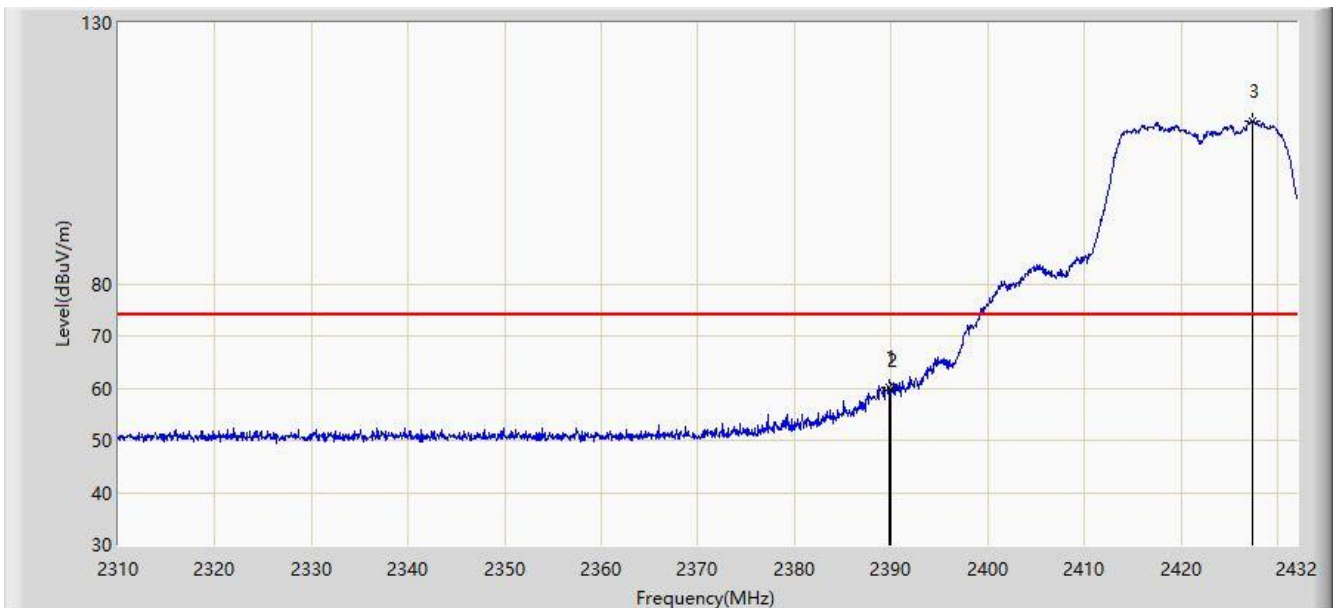


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2389.788	60.238	62.079	-13.762	74.000	-1.841	PK
2			2390.000	59.432	61.274	-14.568	74.000	-1.842	PK
3		*	2427.364	111.061	113.040	N/A	N/A	-1.979	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/02/28 - 03:59
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AC1300 MU-MIMO 迷你 USB 無線網卡	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11-VHT20 at Channel 2422MHz, Ant 0 + 1	

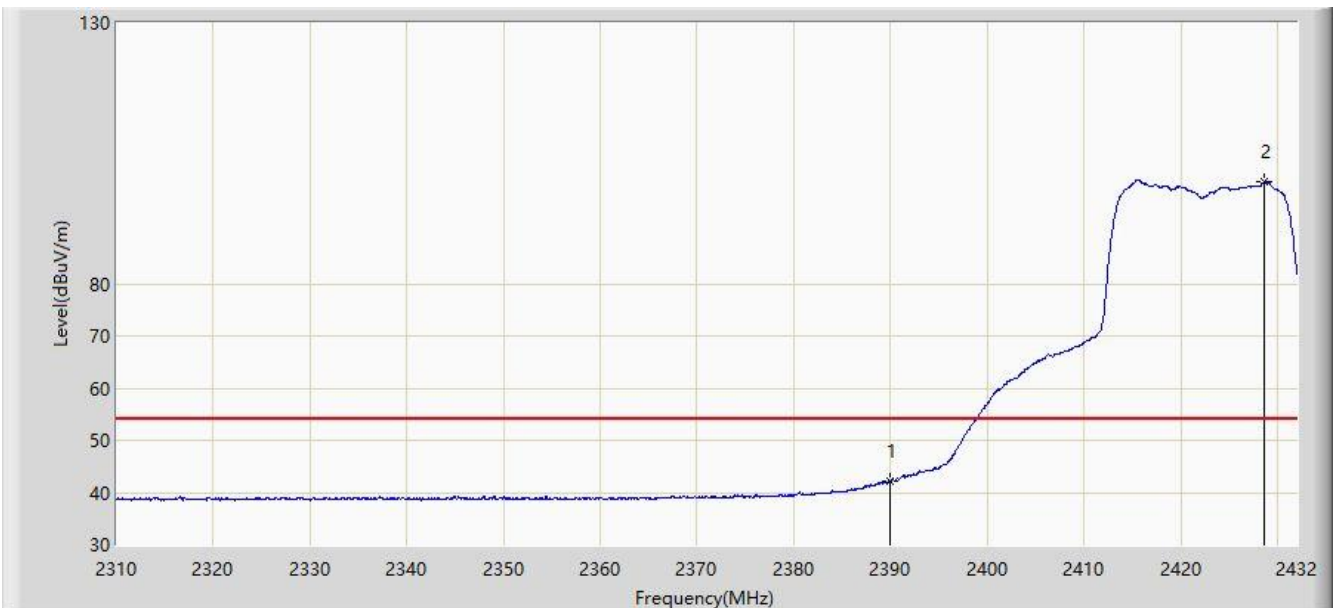


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	42.030	43.872	-11.970	54.000	-1.842	AV
2		*	2428.706	99.627	101.612	N/A	N/A	-1.985	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/02/28 - 03:59
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AC1300 MU-MIMO 迷你 USB 無線網卡	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11-VHT20 at Channel 2422MHz, Ant 0 + 1	

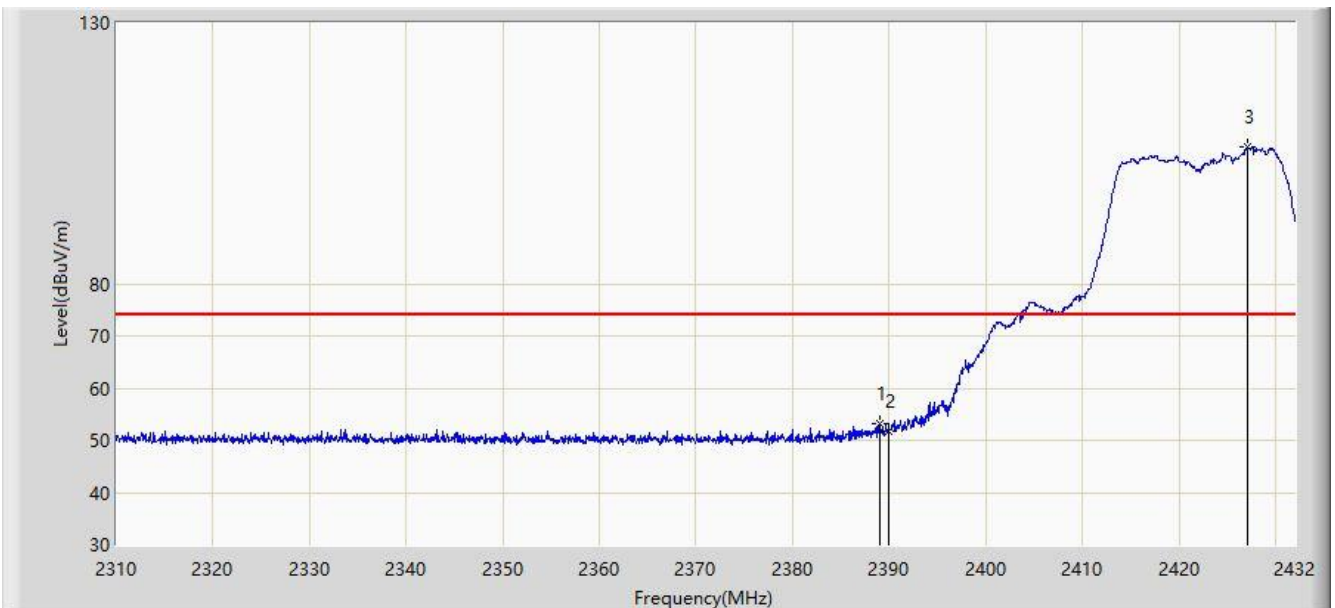


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2388.995	53.124	54.963	-20.876	74.000	-1.839	PK
2			2390.000	51.880	53.722	-22.120	74.000	-1.842	PK
3		*	2427.181	106.230	108.209	N/A	N/A	-1.978	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/02/28 - 04:00
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AC1300 MU-MIMO 迷你 USB 無線網卡	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11-VHT20 at Channel 2422MHz, Ant 0 + 1	

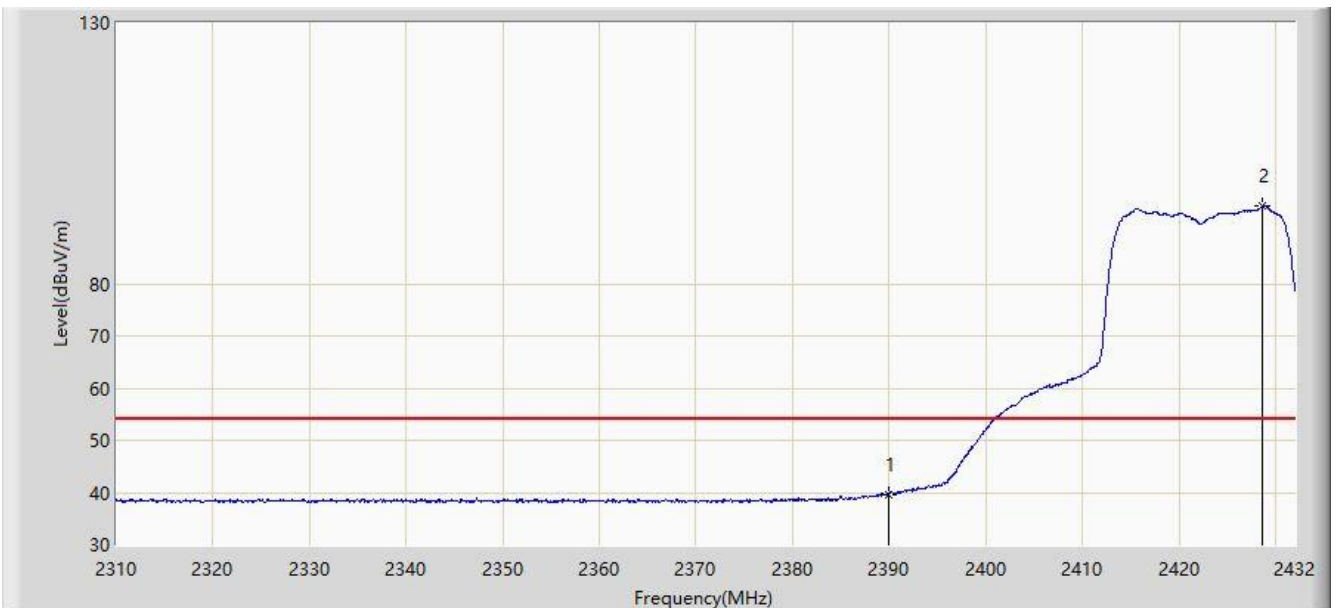

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	39.697	41.539	-14.303	54.000	-1.842	AV
2		*	2428.645	94.826	96.810	N/A	N/A	-1.985	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).