



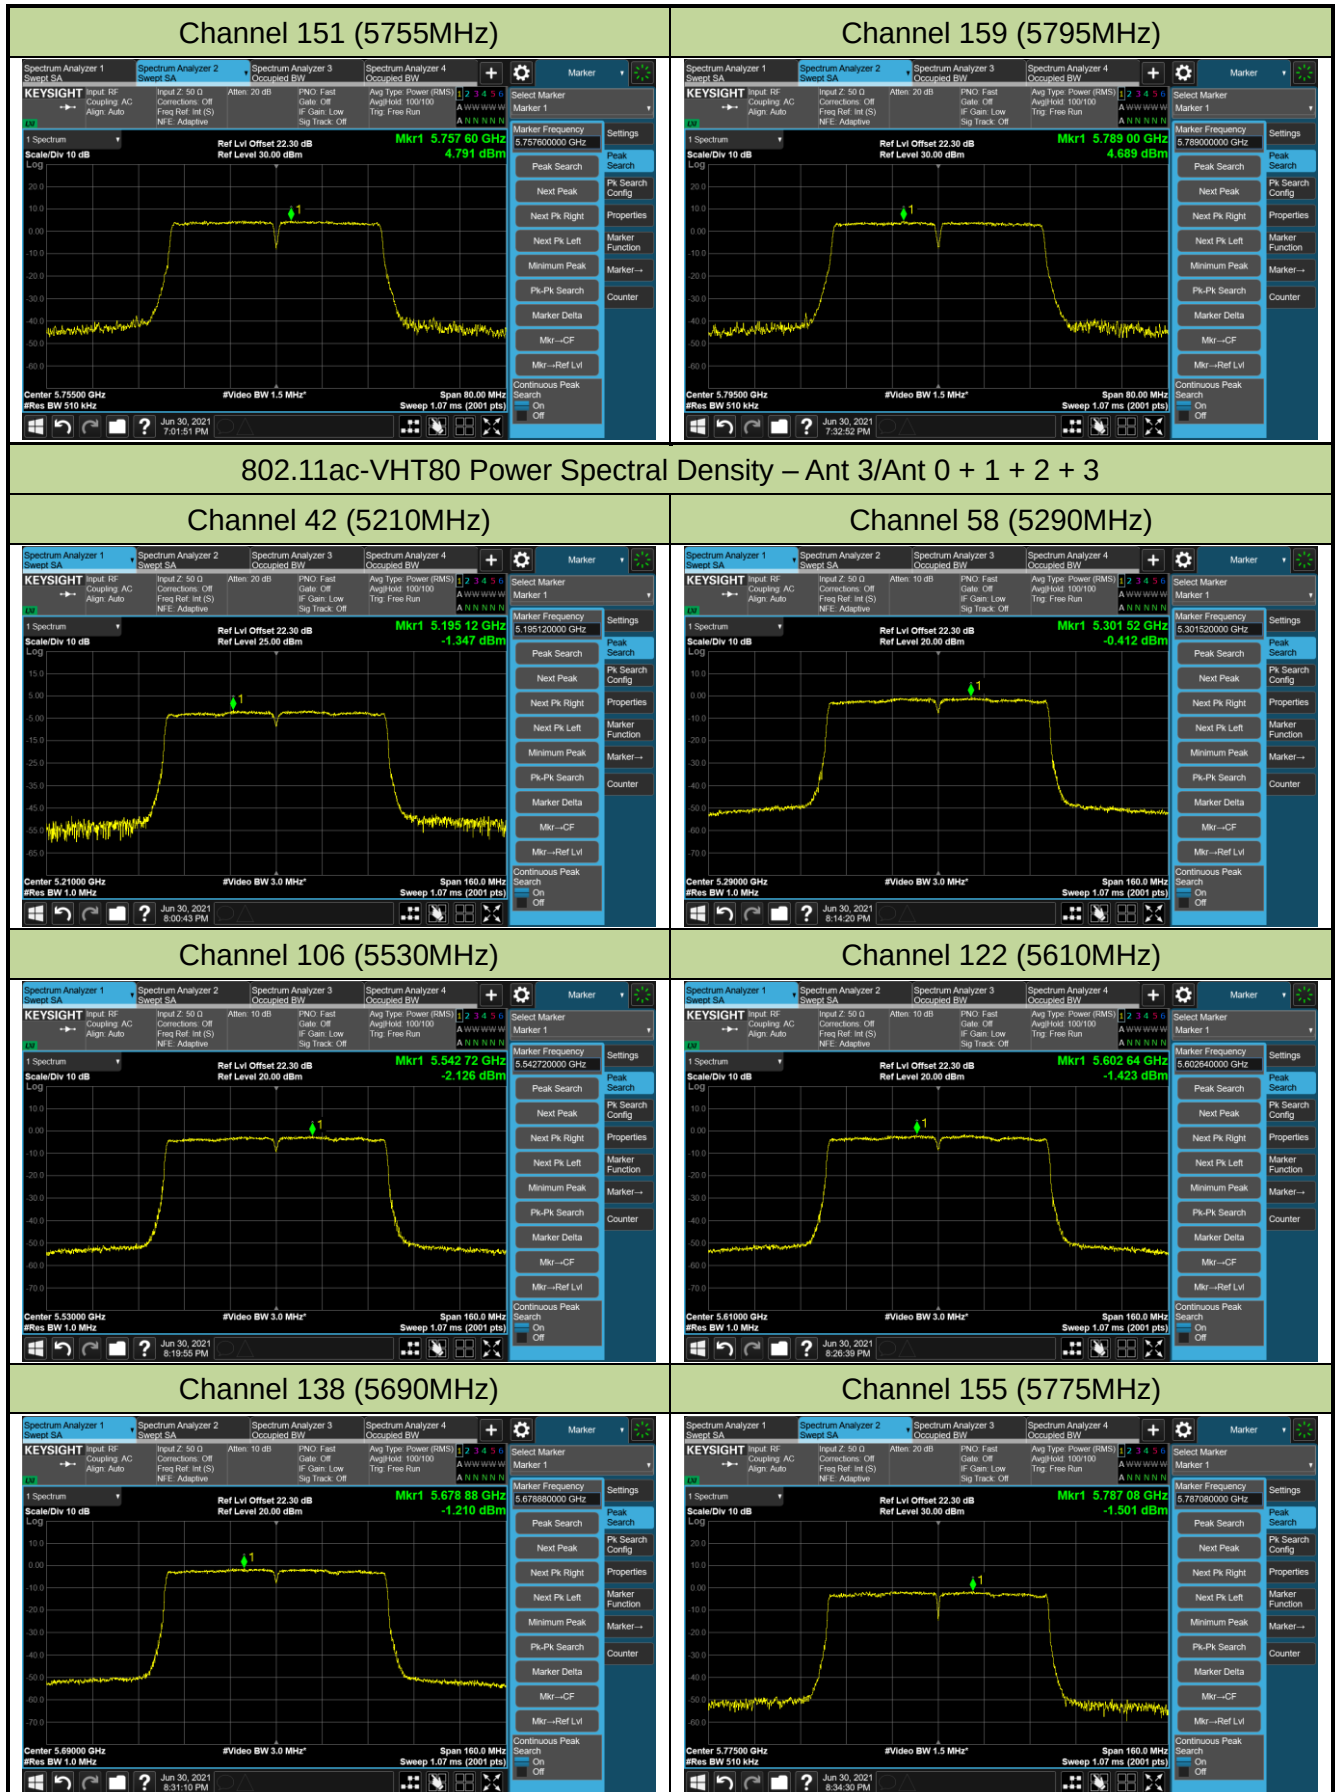


802.11ac-VHT160 Power Spectral Density – Ant 0/Ant 0 + 1 + 2 + 3

Channel 50 (5250MHz)

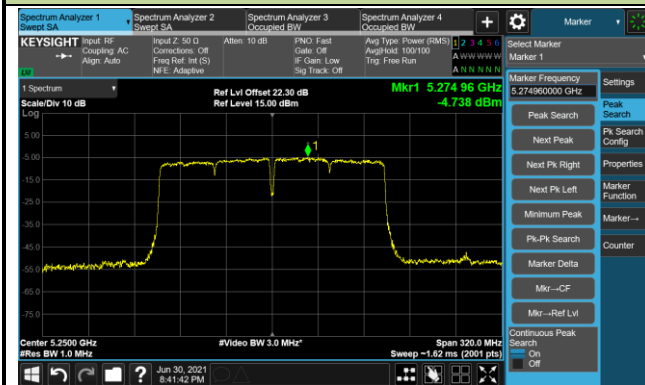


Channel 144 (5570MHz)

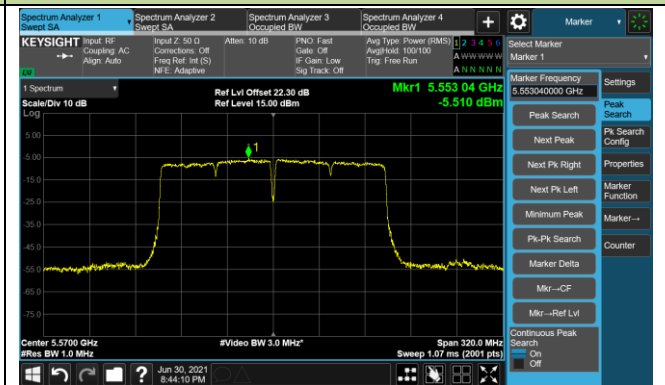


802.11ax-HE20 Power Spectral Density – Ant 3/Ant 0 + 1 + 2 + 3


Channel 36 (5180MHz)

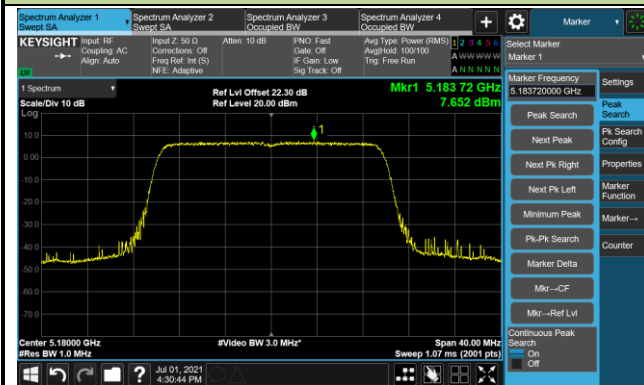


Channel 44 (5220MHz)

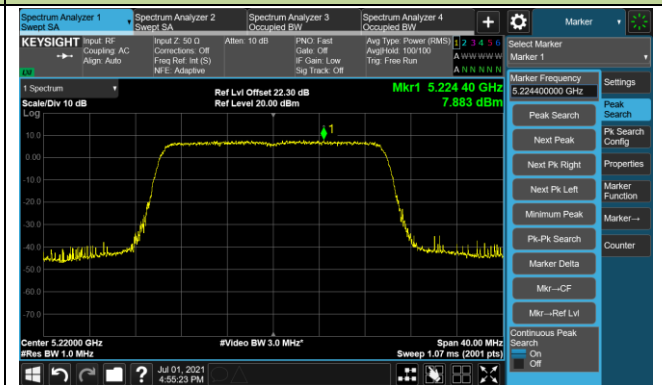


Channel 48 (5240MHz)

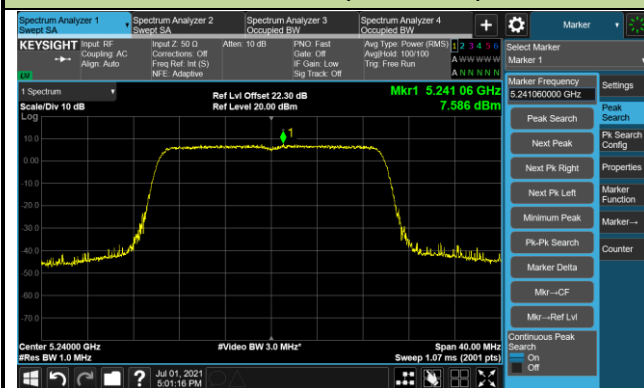


Channel 52 (5260MHz)

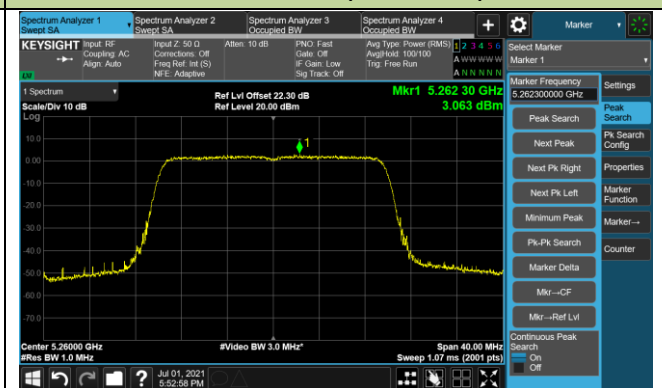


Channel 60 (5300MHz)

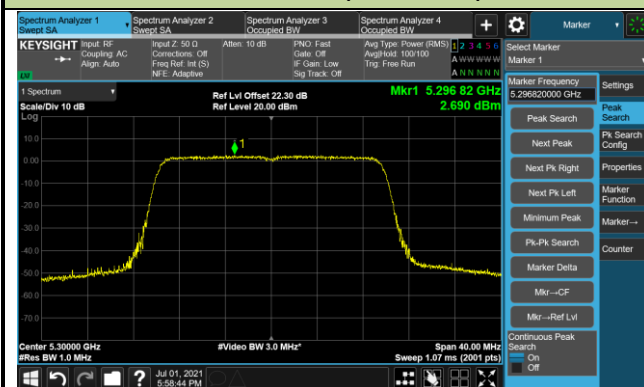


Channel 64 (5320MHz)

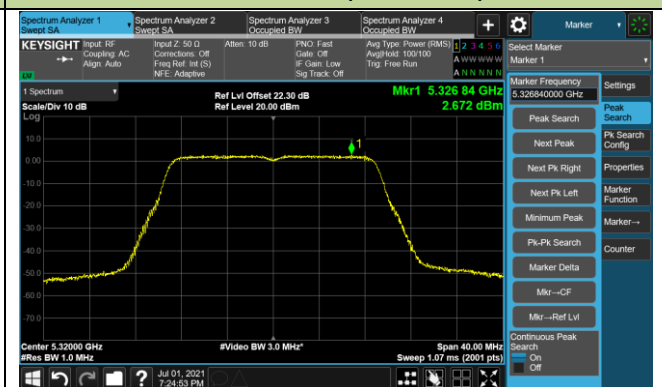


Channel 100 (5500MHz)

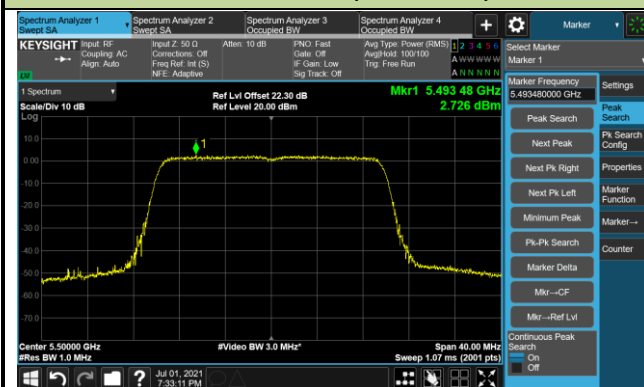


Channel 120 (5600MHz)

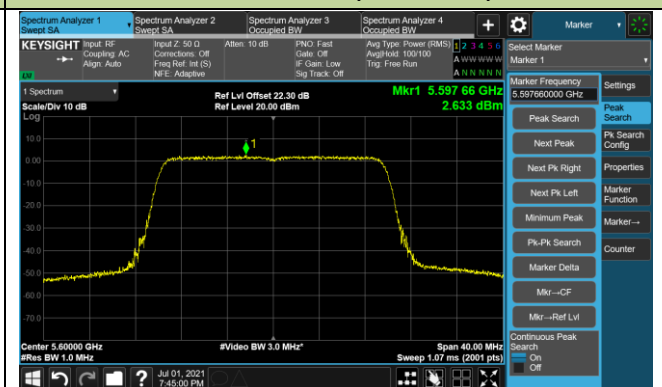

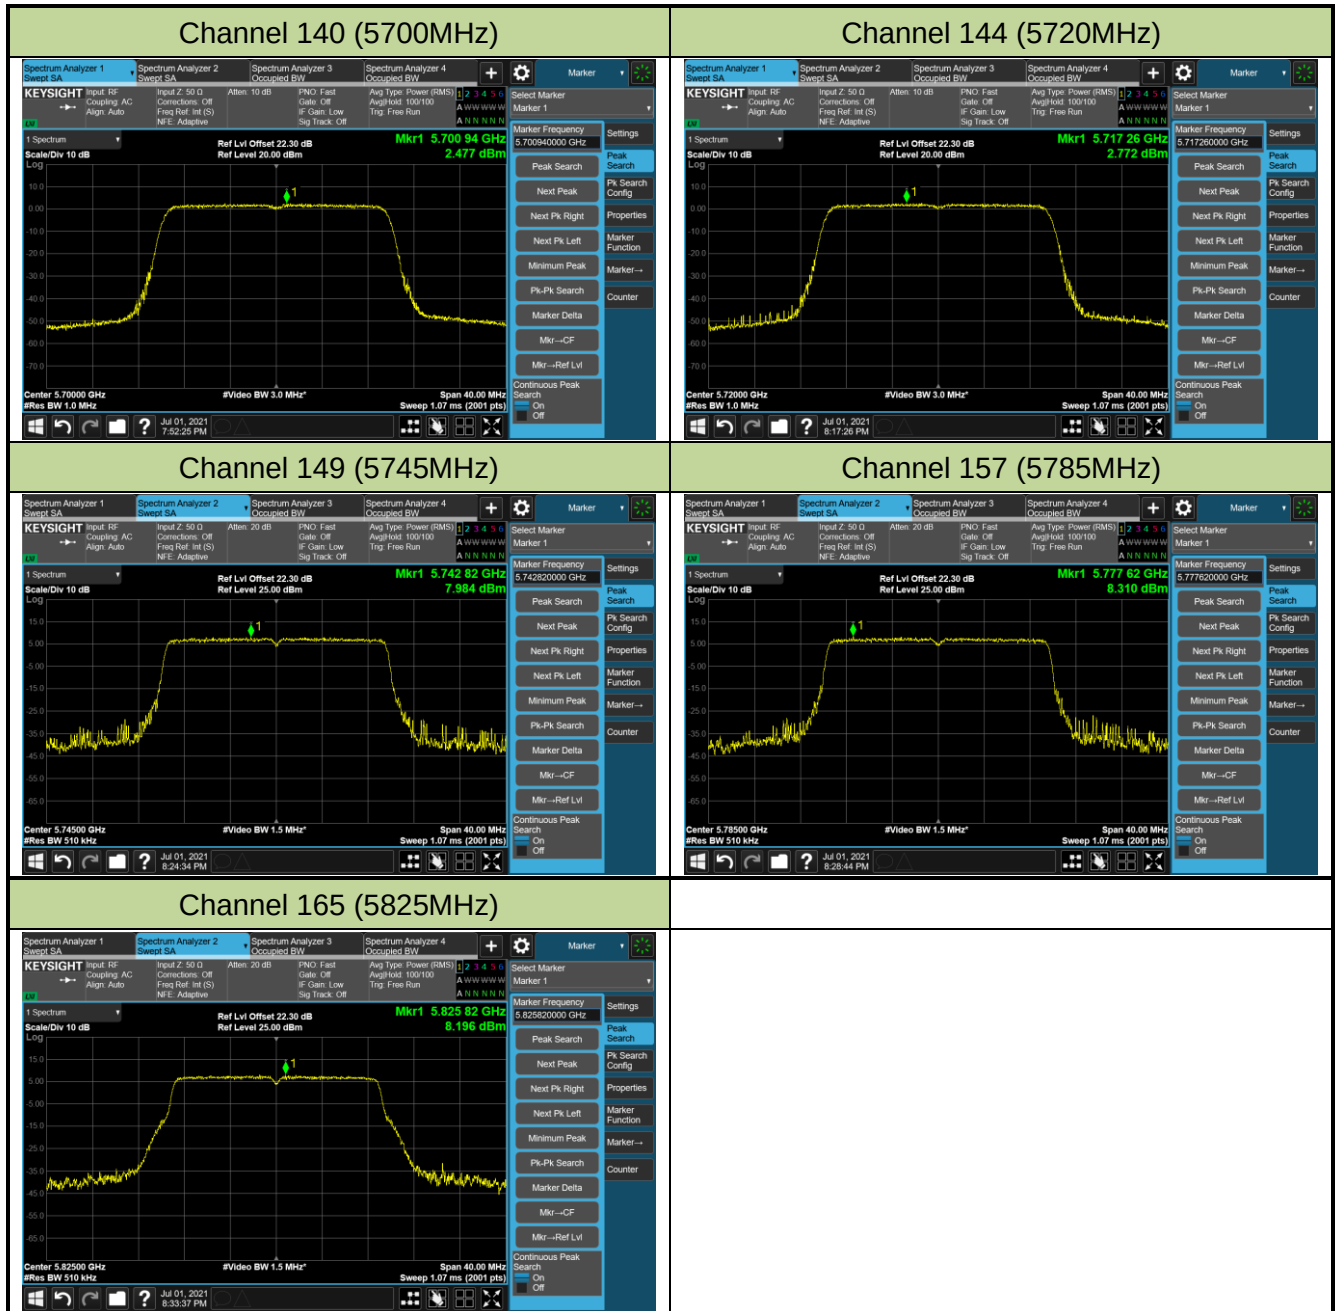


802.11ax-HE40 Power Spectral Density – Ant 3/Ant 0 + 1 + 2 + 3


Channel 38 (5190MHz)

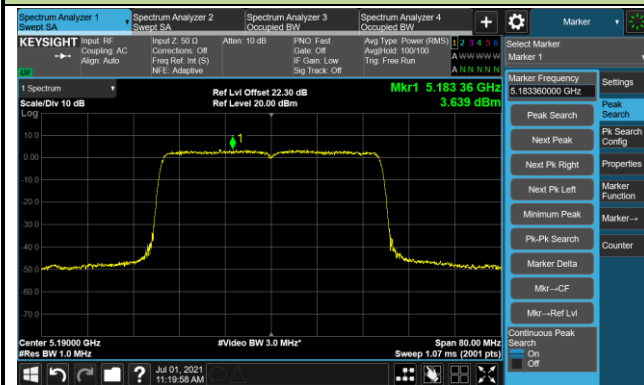


Channel 46 (5230MHz)

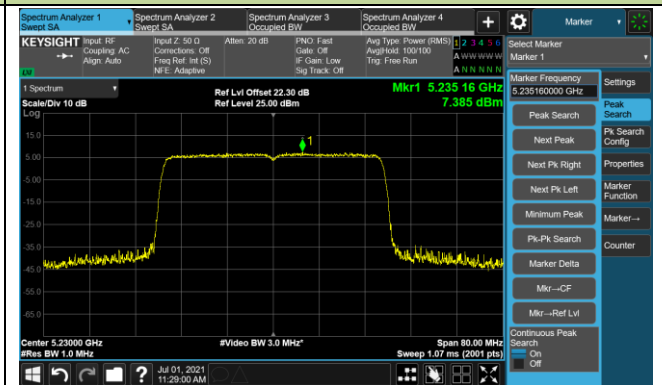


Channel 54 (5270MHz)

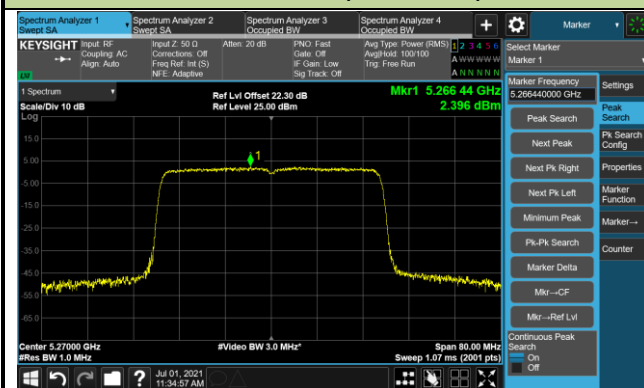


Channel 62 (5310MHz)

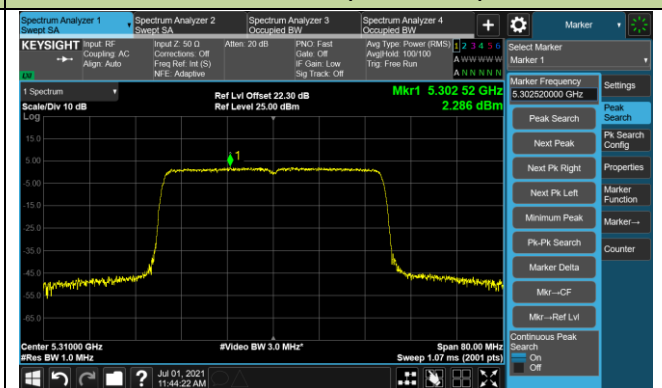


Channel 102 (5510MHz)

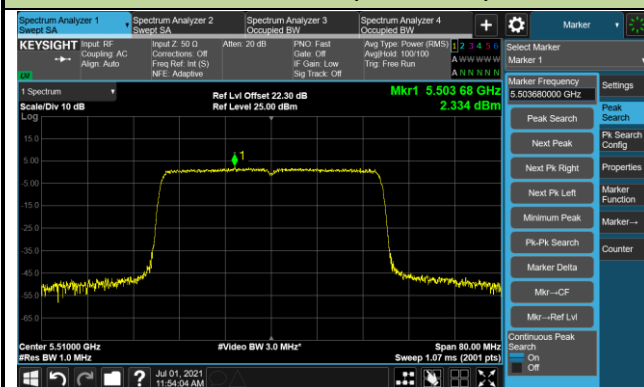


Channel 118 (5590MHz)

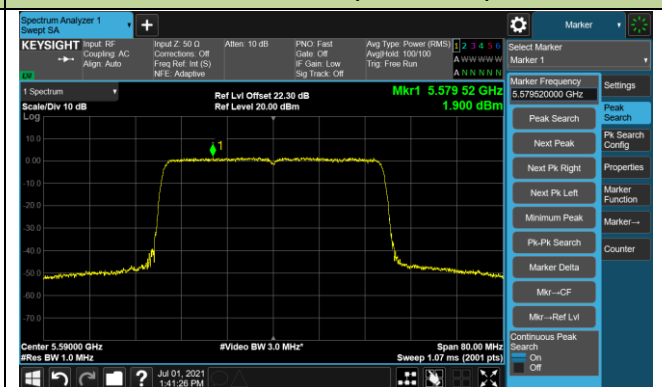

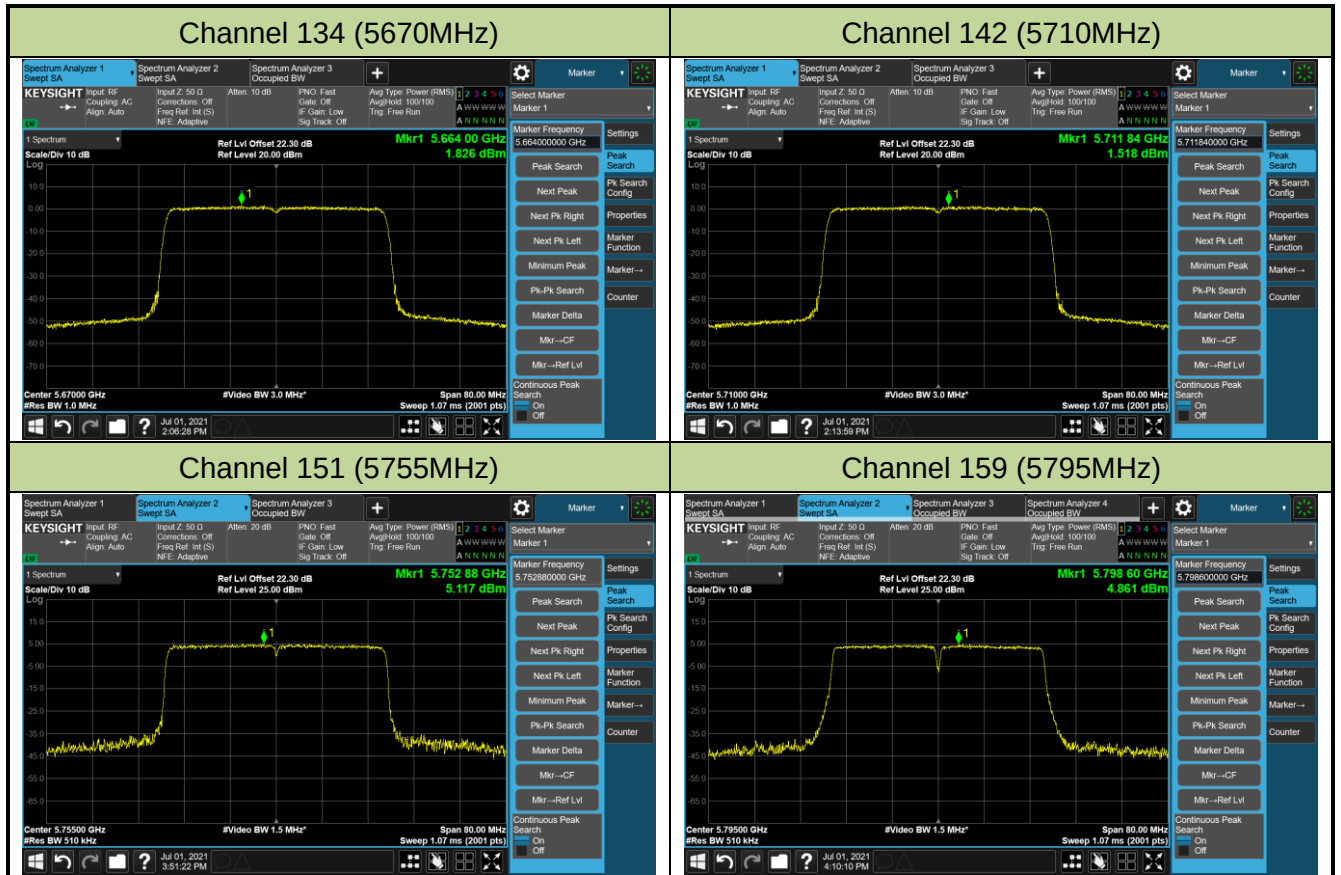


802.11ax-HE80 Power Spectral Density – Ant 3/Ant 0 + 1 + 2 + 3


Channel 42 (5210MHz)

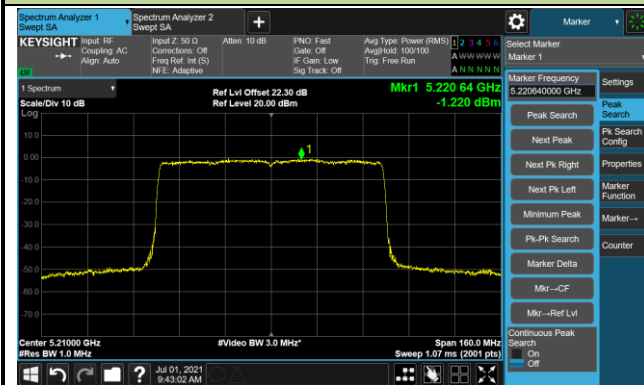


Channel 58 (5290MHz)

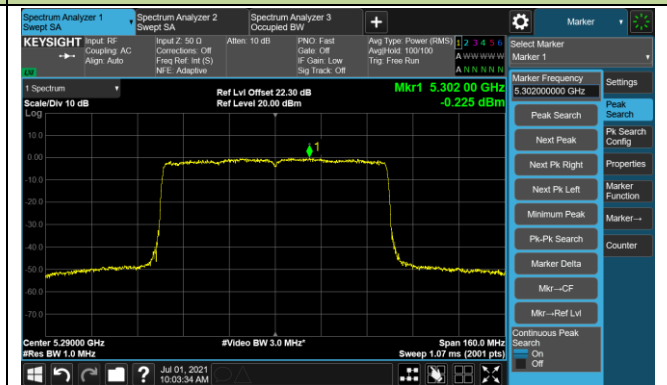


Channel 106 (5530MHz)

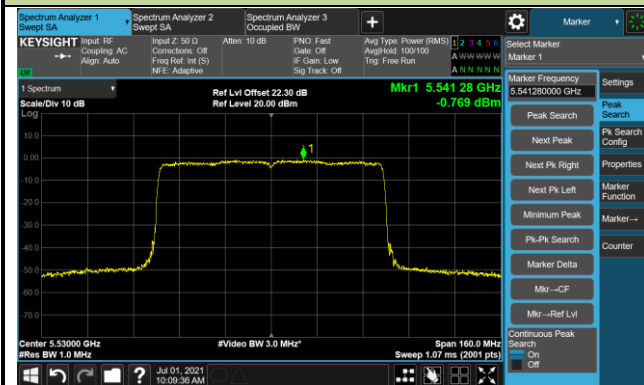


Channel 122 (5610MHz)

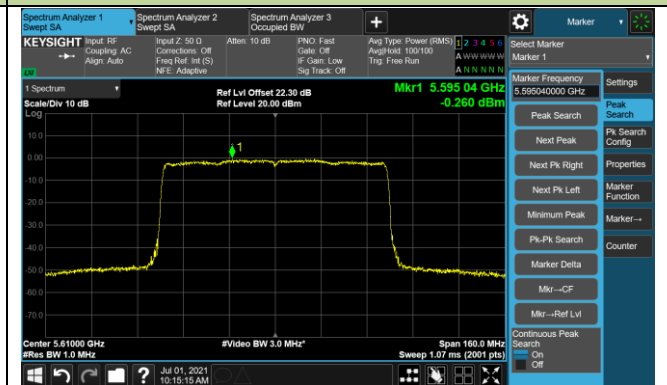

Channel 138 (5690MHz)

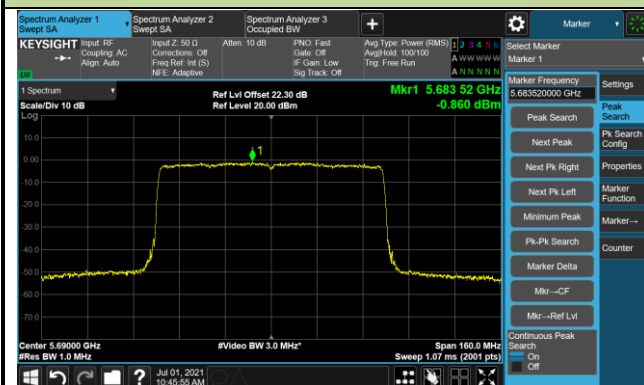

Channel 155 (5775MHz)

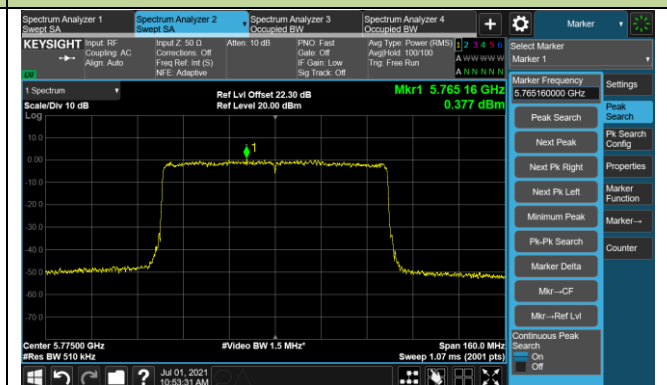


802.11ax-HE160 Power Spectral Density – Ant 3/Ant 0 + 1 + 2 + 3

Channel 50 (5250MHz)



Channel 144 (5570MHz)

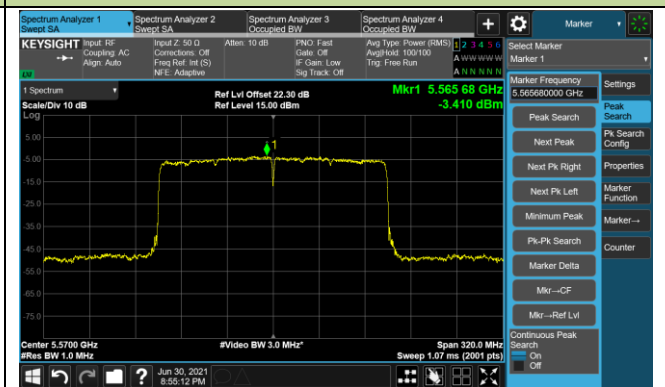


5.7. 操作頻帶外的峰值發射

5.7.1. 適用標準

依據國家通訊傳播委員會低功率射頻器材技術規範之第 5.7.3 節：


- (1) 在 5.15 GHz~5.35 GHz 及 5.470 GHz~5.725 GHz 頻段操作的發射器：帶外發射之有效等向輻射功率(EIRP) $\leq$ -27 dBm/MHz。
- (2) 在 5.725 GHz~5.850 GHz 的頻段操作之發射器：所有頻帶邊緣向外 5 MHz 內頻率之發射，有效等向輻射功率(EIRP) $\leq$ 27 dBm/MHz~15.6 dBm/MHz (以線性法計算對應之限制值)；所有頻帶邊緣向外 5 MHz~25 MHz，有效等向輻射功率(EIRP) $\leq$ 15.6 dBm/MHz~10 dBm/MHz (以線性法計算對應之限制值)；所有頻帶邊緣外 25 MHz~75 MHz，有效等向輻射功率(EIRP) $\leq$ 10 dBm/MHz~-27 dBm/MHz (以線性法計算對應之限制值)；所有頻帶邊緣外 $\geq$ 75 MHz 的頻率之發射，有效等向輻射功率(EIRP) $\leq$ -27 dBm/MHz；

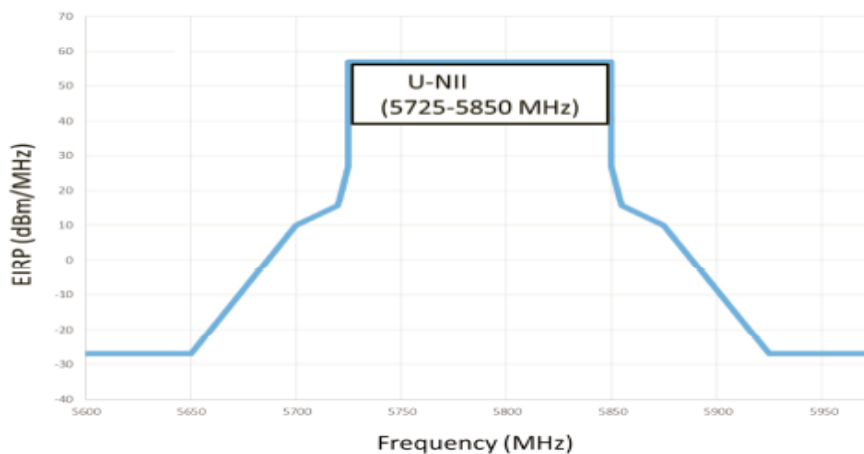

5.7.2. 量測方法


高頻待測物置於高 150 公分之非導體桌面，受測物與配件設備之電源線無須束綁，桌面上受測設備的所有電源線由桌子的後緣垂下沿旋轉桌表面接至交流插座。落地型設備的交流電源線可以方便的型態走線。桌面可 360 度旋轉，接收天線置於距待測物 3m 距離，高度可在 1 至 4 公尺間變動，以量測待測物之最大輻射電場強度。接收天線並應於水準及垂直極化方向各量測一次。

5.7.3. 測試架構圖

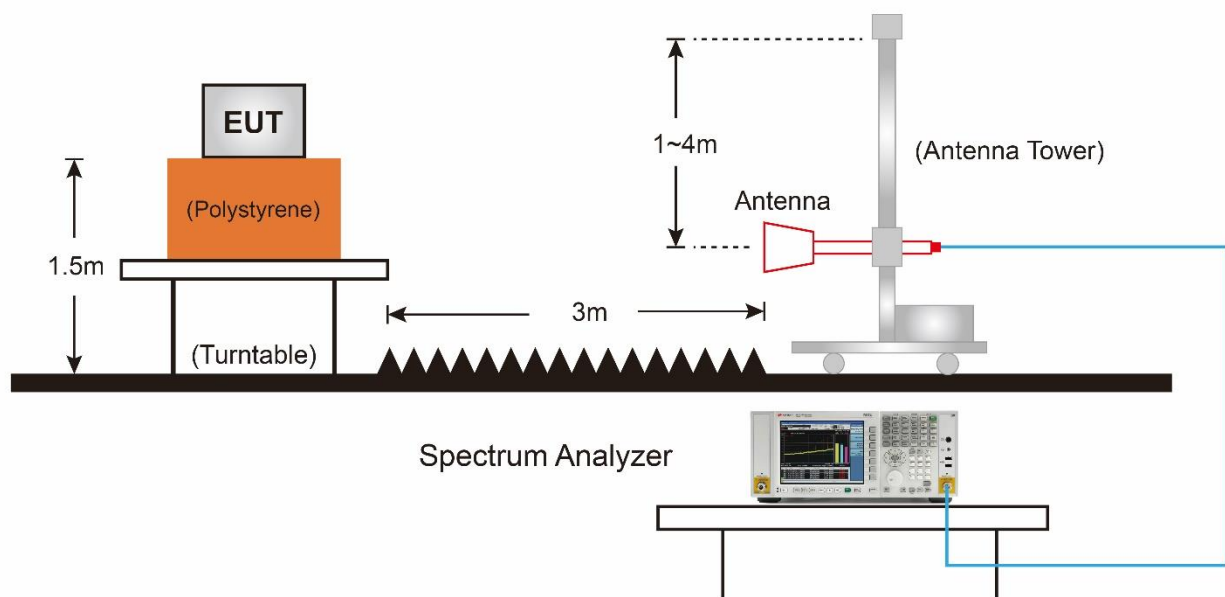

5.7.4. 操作頻帶外的峰值發射測試結果

EUT	AX6000 次世代 Wi-Fi 路由器	Date of Test	2021-06-26
Factor	BBHA 9120D	Temp. / Humidity	23.2°C/47.9%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11a at Channel 5180MHz	Test Voltage	110V/60Hz

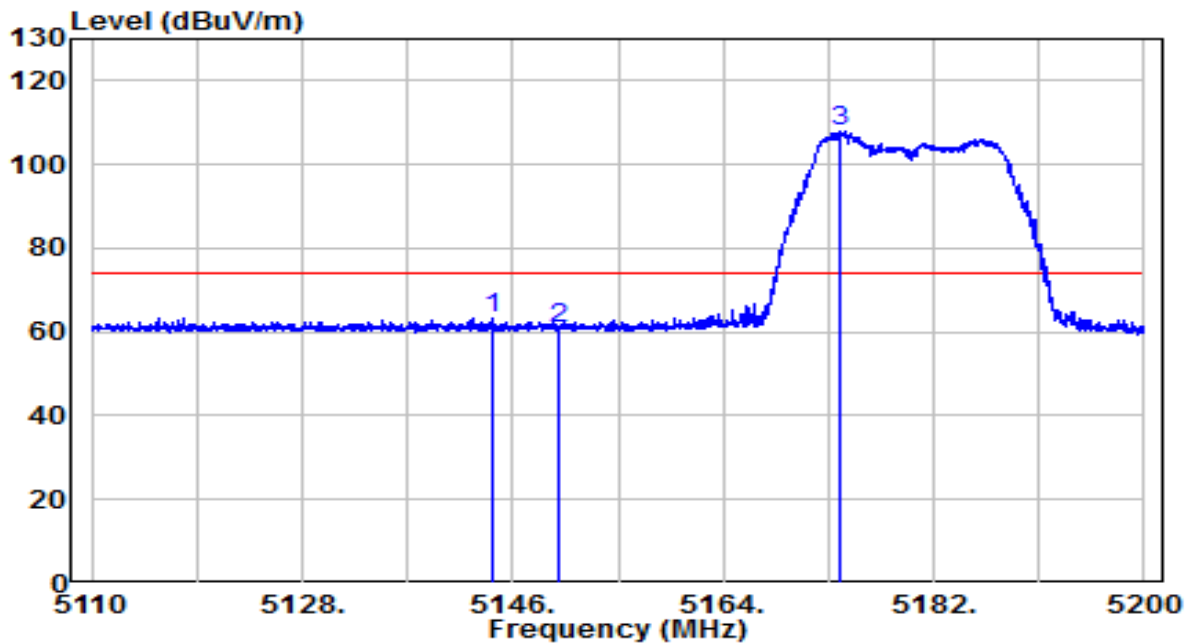


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5144.245	43.27	19.90	63.17	-10.83	74.00	Peak
2	5150.000	41.12	19.91	61.02	-12.98	74.00	Peak
3	* 5173.990	87.92	19.93	107.85	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6000 次世代 Wi-Fi 路由器	Date of Test	2021-06-26
Factor	BBHA 9120D	Temp. / Humidity	23.2°C/47.9%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11a at Channel 5180MHz	Test Voltage	110V/60Hz

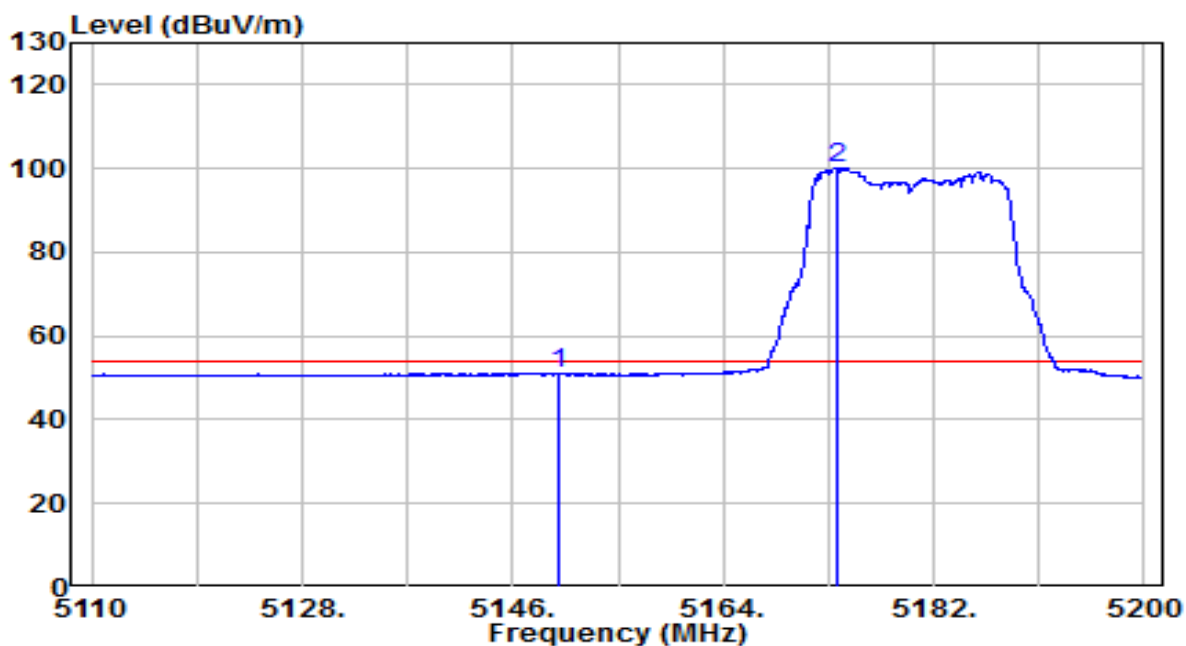


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5150.000	30.99	19.91	50.90	-3.10	54.00	Average
2	* 5173.720	80.32	19.93	100.25	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6000 次世代 Wi-Fi 路由器	Date of Test	2021-06-26
Factor	BBHA 9120D	Temp. / Humidity	23.2°C/47.9%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11a at Channel 5180MHz	Test Voltage	110V/60Hz

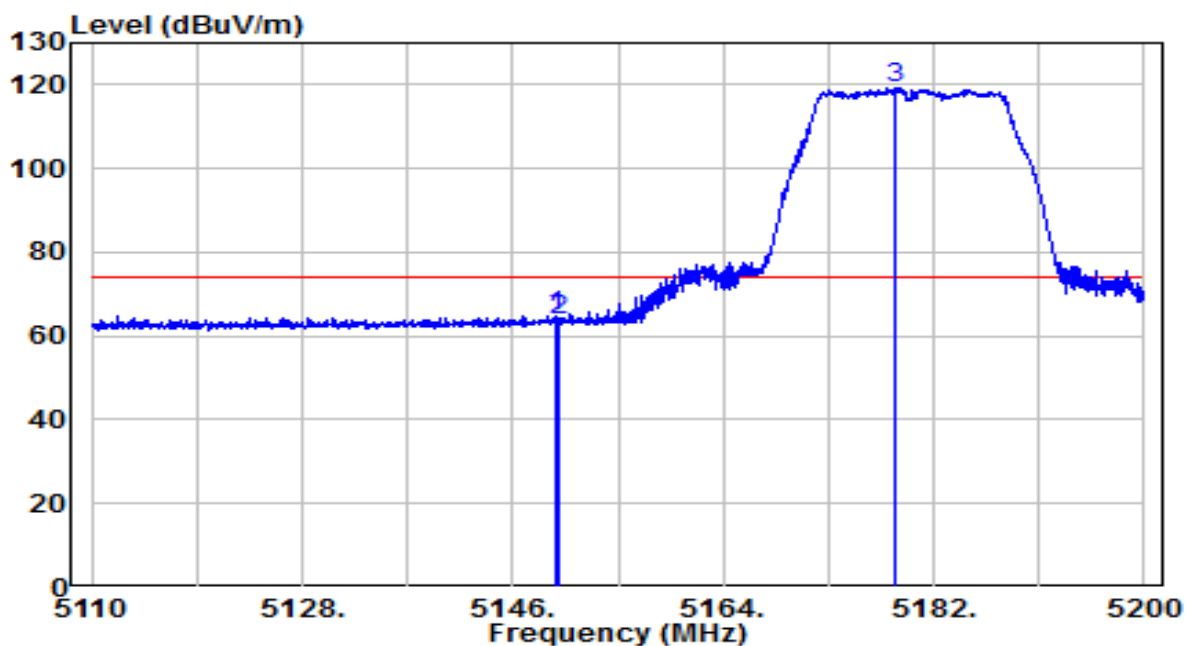


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5149.600	45.07	19.91	64.97	-9.03	74.00	Peak
2	5150.000	43.80	19.91	63.71	-10.29	74.00	Peak
3	* 5178.760	99.40	19.94	119.33	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6000 次世代 Wi-Fi 路由器	Date of Test	2021-06-26
Factor	BBHA 9120D	Temp. / Humidity	23.2°C/47.9%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11a at Channel 5180MHz	Test Voltage	110V/60Hz

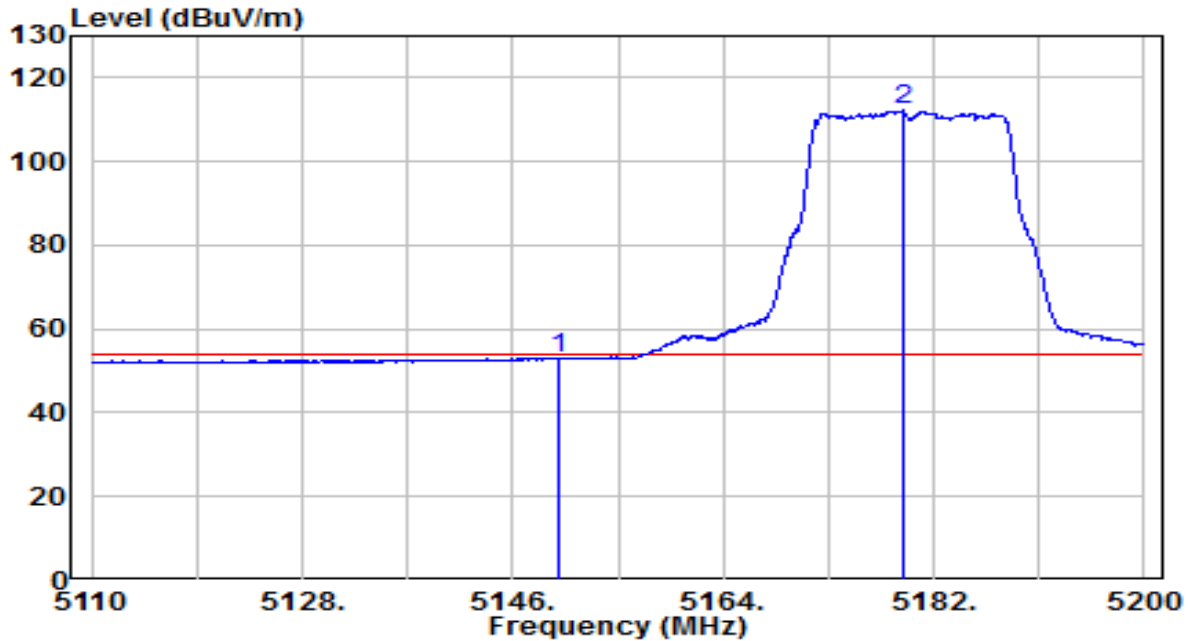


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5150.000	32.87	19.91	52.77	-1.23	54.00	Average
2	* 5179.390	92.19	19.94	112.13	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6000 次世代 Wi-Fi 路由器	Date of Test	2021-06-26
Factor	BBHA 9120D	Temp. / Humidity	23.2°C/47.9%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11a at Channel 5320MHz	Test Voltage	110V/60Hz

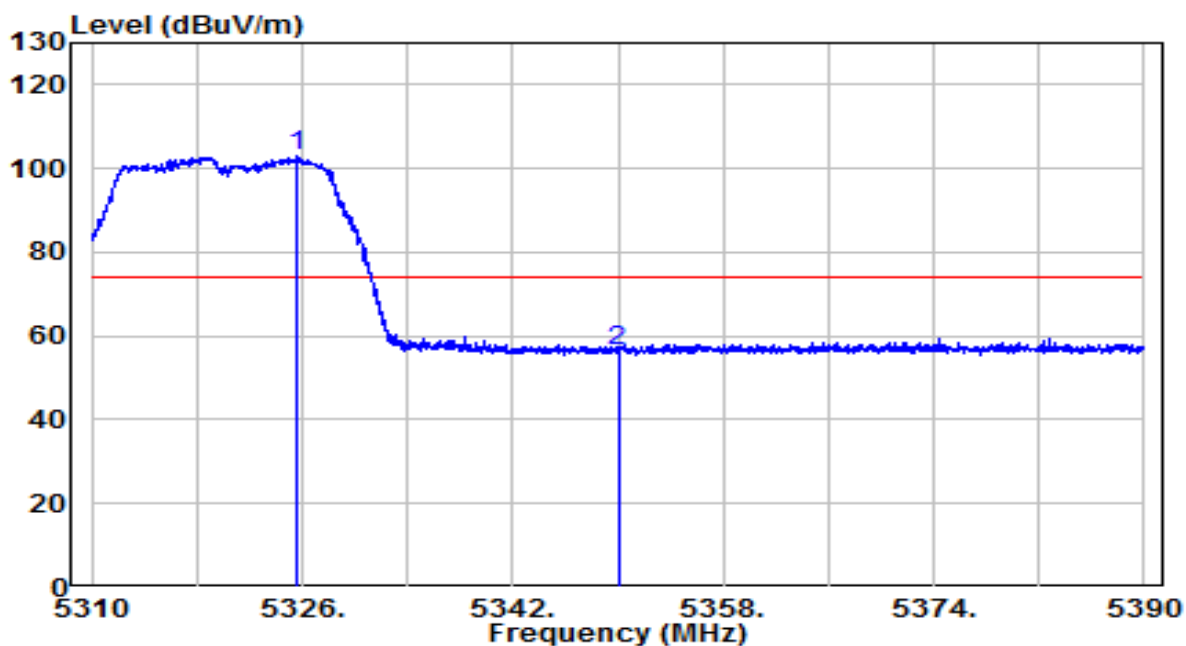


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5325.560	82.88	20.09	102.97	N/A	N/A	Peak
2		5350.000	36.19	20.11	56.30	-17.70	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6000 次世代 Wi-Fi 路由器	Date of Test	2021-06-26
Factor	BBHA 9120D	Temp. / Humidity	23.2°C/47.9%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11a at Channel 5320MHz	Test Voltage	110V/60Hz

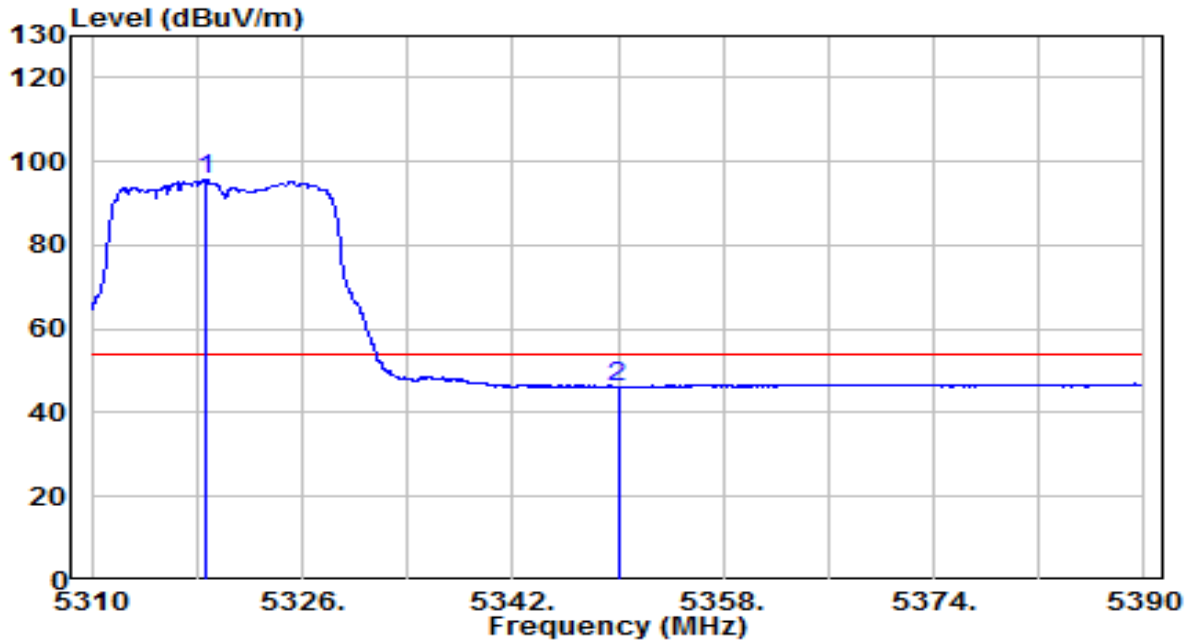


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5318.760	75.52	20.08	95.60	N/A	N/A	Average
2		5350.000	25.95	20.11	46.07	-7.93	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6000 次世代 Wi-Fi 路由器	Date of Test	2021-06-26
Factor	BBHA 9120D	Temp. / Humidity	23.2°C/47.9%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11a at Channel 5320MHz	Test Voltage	110V/60Hz

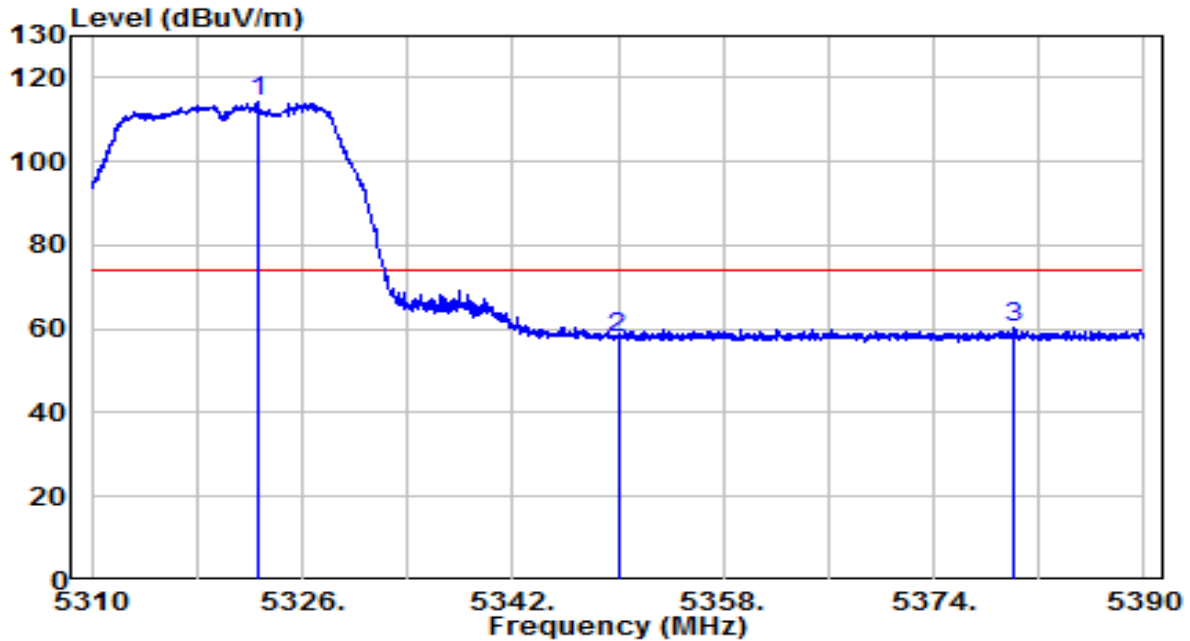


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5322.560	94.00	20.09	114.08	N/A	N/A	Peak
2		5350.000	37.79	20.11	57.90	-16.10	74.00	Peak
3		5380.040	40.12	20.15	60.26	-13.74	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6000 次世代 Wi-Fi 路由器	Date of Test	2021-06-26
Factor	BBHA 9120D	Temp. / Humidity	23.2°C/47.9%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11a at Channel 5320MHz	Test Voltage	110V/60Hz

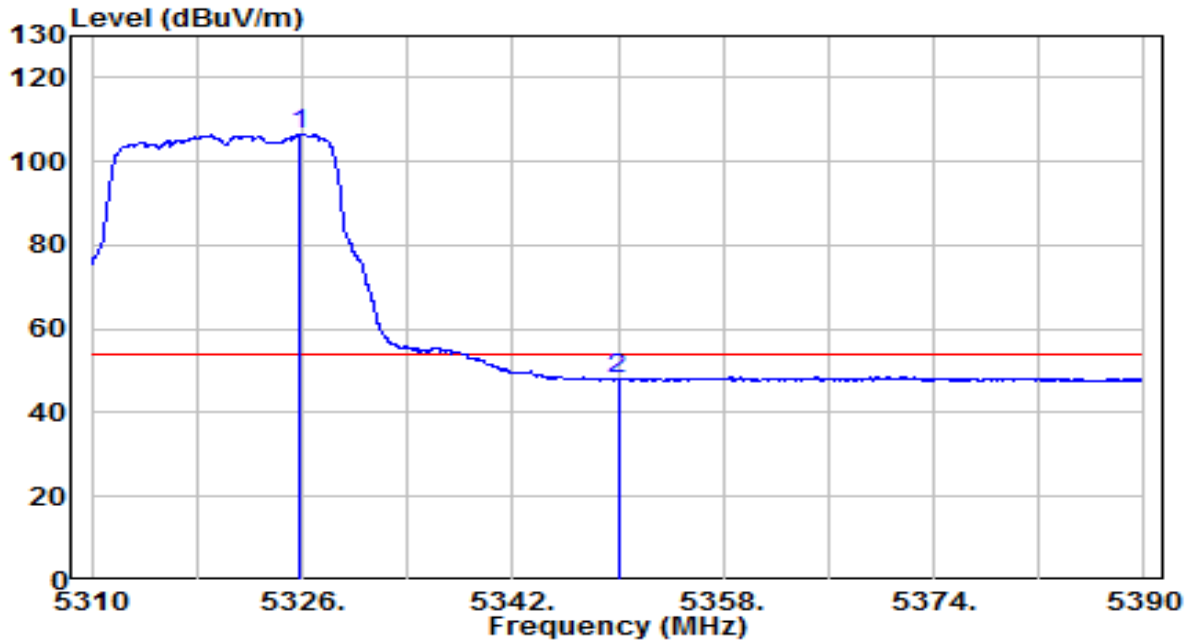


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5325.880	86.31	20.09	106.40	N/A	N/A	Average
2		5350.000	27.93	20.11	48.04	-5.96	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6000 次世代 Wi-Fi 路由器	Date of Test	2021-06-26
Factor	BBHA 9120D	Temp. / Humidity	23.2°C/47.9%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11a at Channel 5500MHz	Test Voltage	110V/60Hz

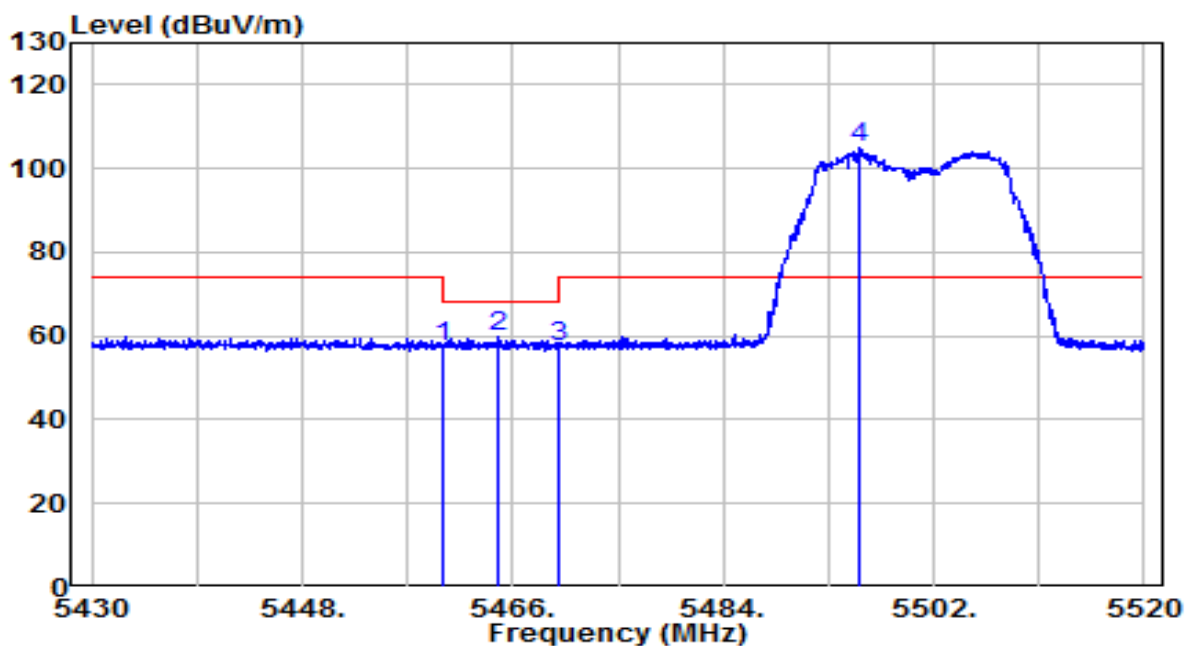


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5460.000	37.07	20.23	57.30	-10.90	68.20	Peak
2	5464.650	39.54	20.23	59.77	-8.43	68.20	Peak
3	5470.000	37.12	20.24	57.36	-10.84	68.20	Peak
4	* 5495.565	84.82	20.27	105.09	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6000 次世代 Wi-Fi 路由器	Date of Test	2021-06-26
Factor	BBHA 9120D	Temp. / Humidity	23.2°C/47.9%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11a at Channel 5500MHz	Test Voltage	110V/60Hz

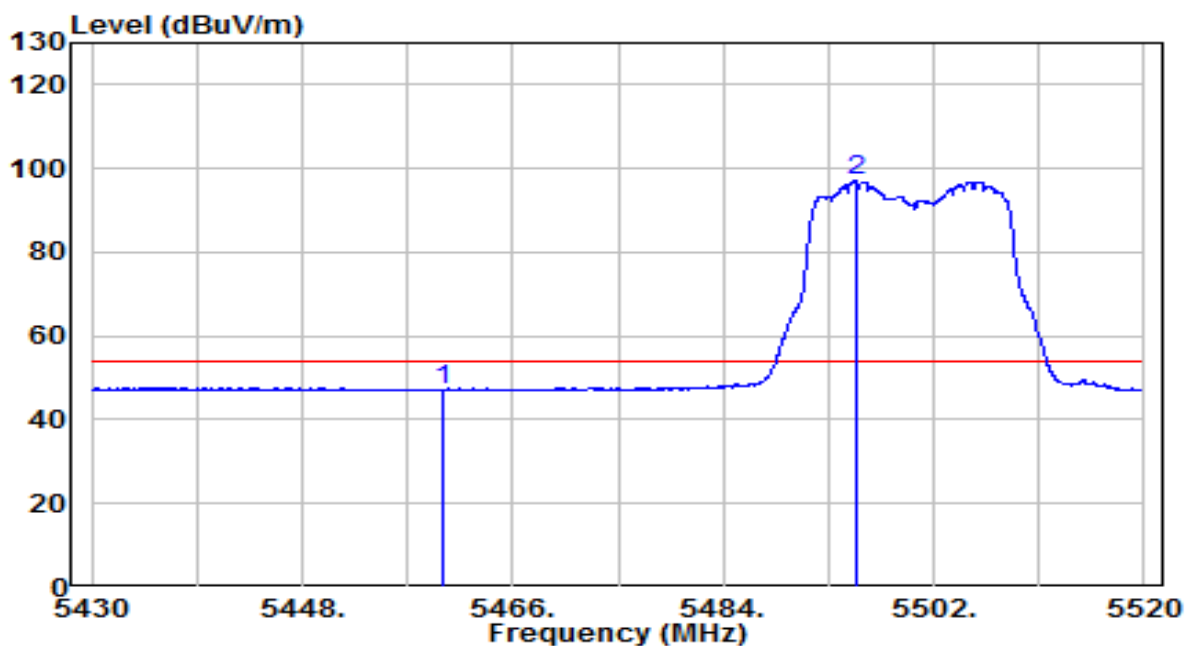


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5460.000	26.95	20.23	47.17	-6.83	54.00	Average
2	* 5495.430	76.88	20.27	97.14	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6000 次世代 Wi-Fi 路由器	Date of Test	2021-06-26
Factor	BBHA 9120D	Temp. / Humidity	23.2°C/47.9%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11a at Channel 5500MHz	Test Voltage	110V/60Hz

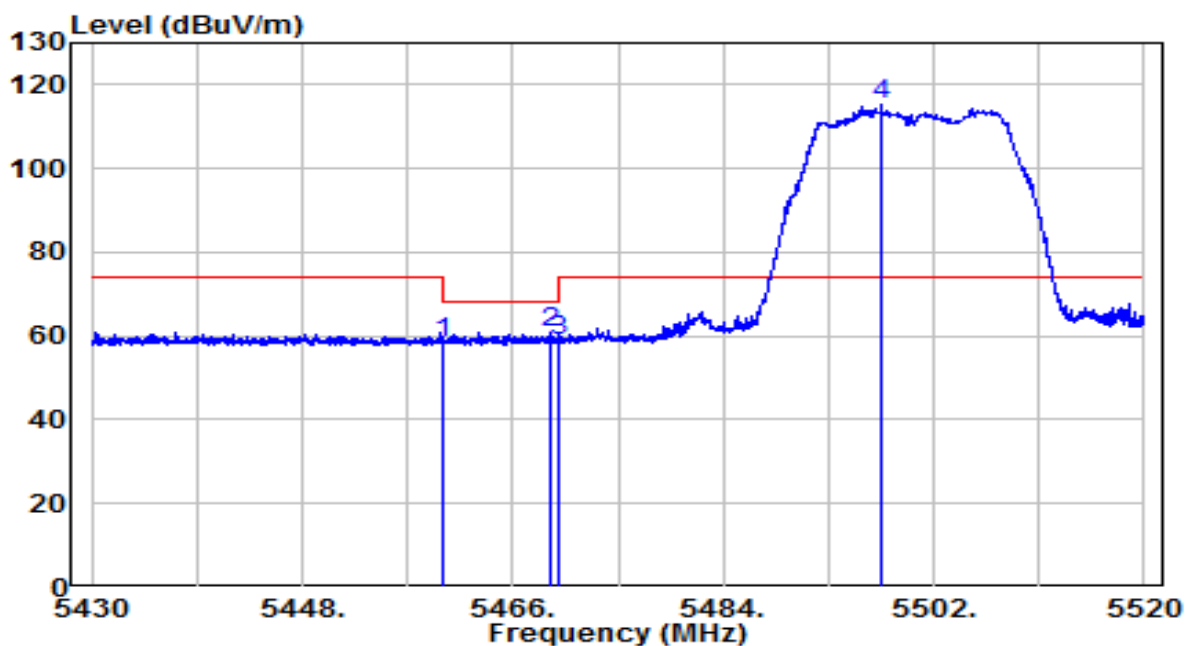


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5460.000	38.13	20.23	58.36	-9.84	68.20	Peak
2	5469.195	40.71	20.24	60.95	-7.25	68.20	Peak
3	5470.000	38.39	20.24	58.63	-9.57	68.20	Peak
4	* 5497.500	94.84	20.27	115.10	N/A	N/A	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
- Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6000 次世代 Wi-Fi 路由器	Date of Test	2021-06-26
Factor	BBHA 9120D	Temp. / Humidity	23.2°C/47.9%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11a at Channel 5500MHz	Test Voltage	110V/60Hz

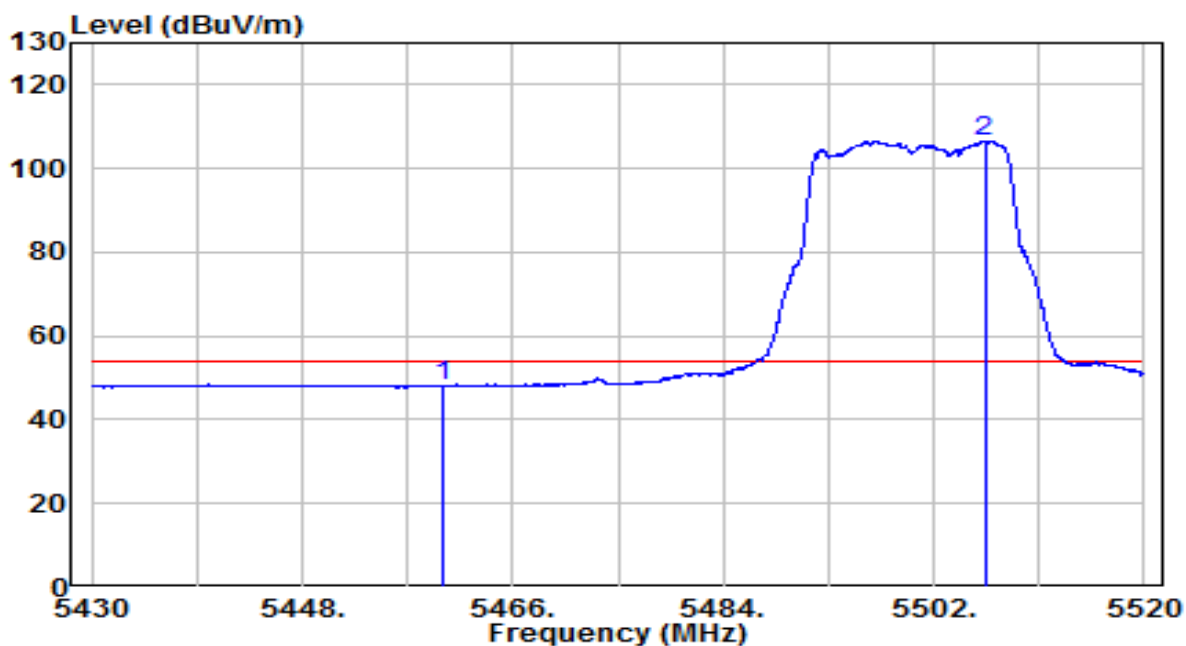


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5460.000	27.99	20.23	48.22	-5.78	54.00	Average
2	* 5506.365	86.18	20.29	106.47	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6000 次世代 Wi-Fi 路由器	Date of Test	2021-06-26
Factor	BBHA 9120D	Temp. / Humidity	23.2°C/47.9%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11a at Channel 5700MHz	Test Voltage	110V/60Hz

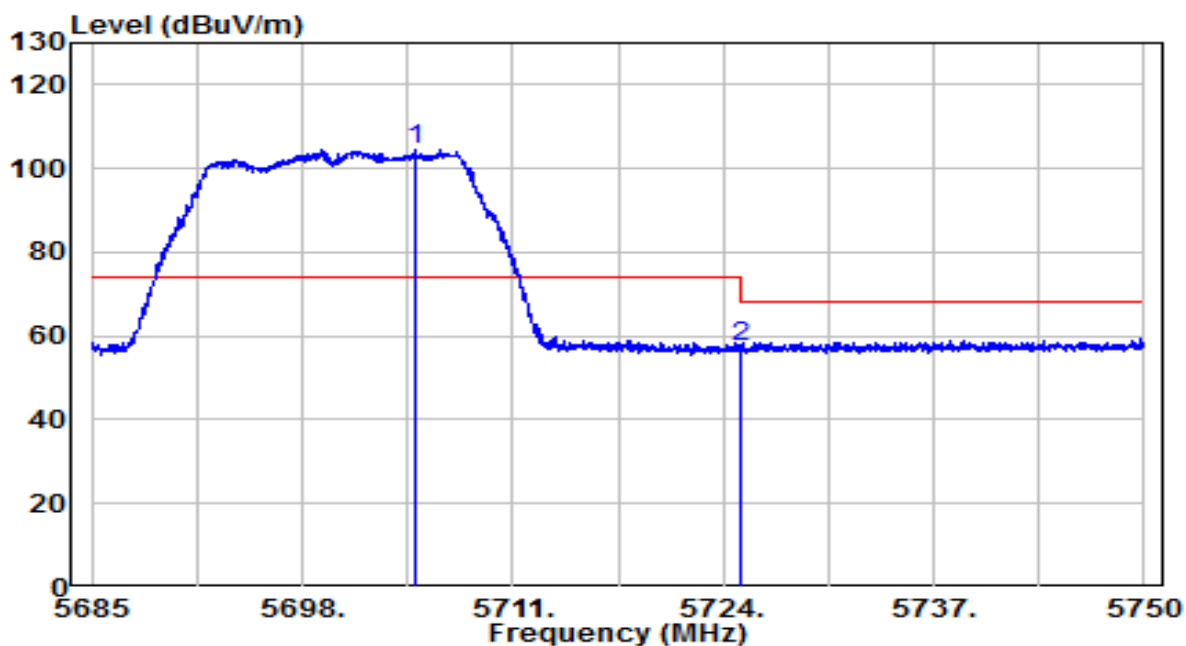


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5705.053	83.54	20.93	104.48	N/A	N/A	Peak
2		5725.000	36.32	21.00	57.31	-10.89	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6000 次世代 Wi-Fi 路由器	Date of Test	2021-06-26
Factor	BBHA 9120D	Temp. / Humidity	23.2°C/47.9%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11a at Channel 5700MHz	Test Voltage	110V/60Hz

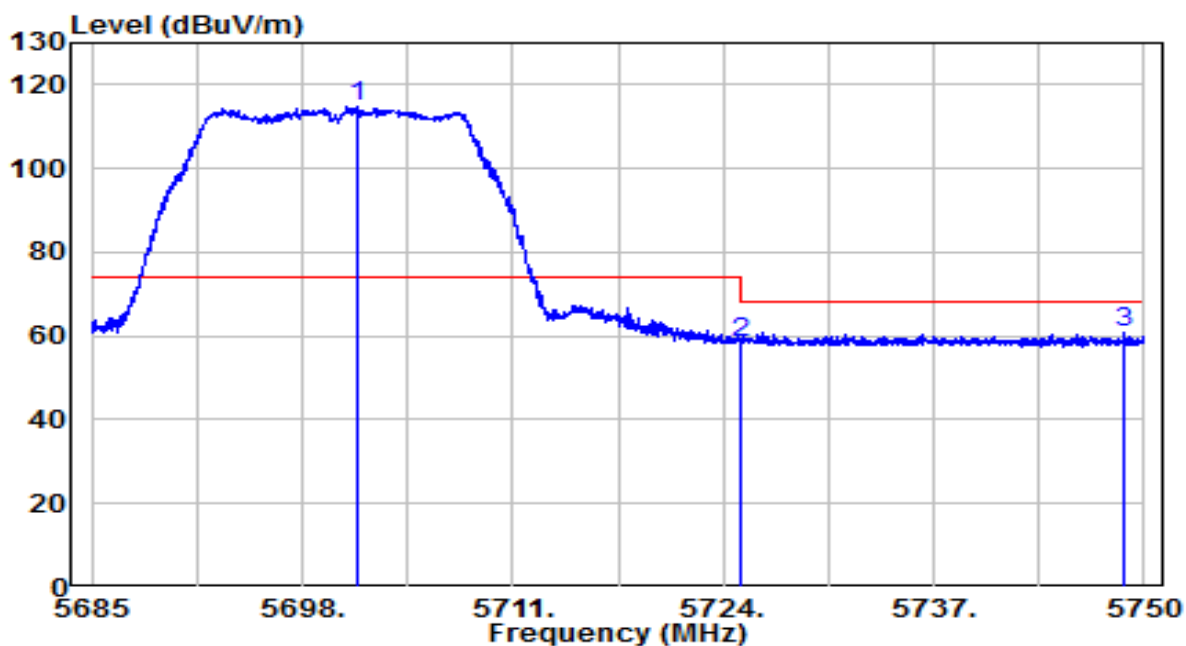


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5701.445	93.71	20.92	114.63	N/A	N/A	Peak
2		5725.000	37.28	21.00	58.28	-9.92	68.20	Peak
3		5748.830	39.91	21.08	60.99	-7.21	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6000 次世代 Wi-Fi 路由器	Date of Test	2021-06-26
Factor	BBHA 9120D	Temp. / Humidity	23.2°C/47.9%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11a at Channel 5745MHz	Test Voltage	110V/60Hz

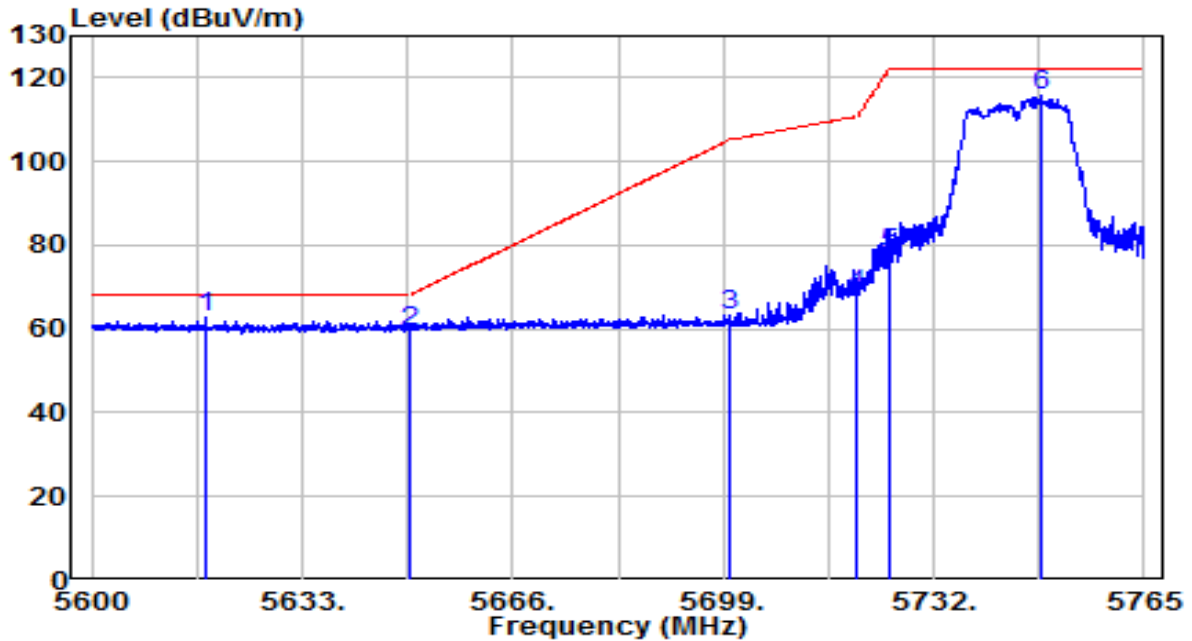


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5617.820	42.33	20.65	62.99	-5.21	68.20	Peak
2		5650.000	38.76	20.76	59.52	-8.68	68.20	Peak
3		5700.000	42.18	20.92	63.10	-42.10	105.20	Peak
4		5720.000	47.34	20.98	68.33	-42.47	110.80	Peak
5		5725.000	56.89	21.00	77.89	-44.31	122.20	Peak
6		5748.913	94.54	21.08	115.61	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6000 次世代 Wi-Fi 路由器	Date of Test	2021-06-26
Factor	BBHA 9120D	Temp. / Humidity	23.2°C/47.9%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11a at Channel 5745MHz	Test Voltage	110V/60Hz

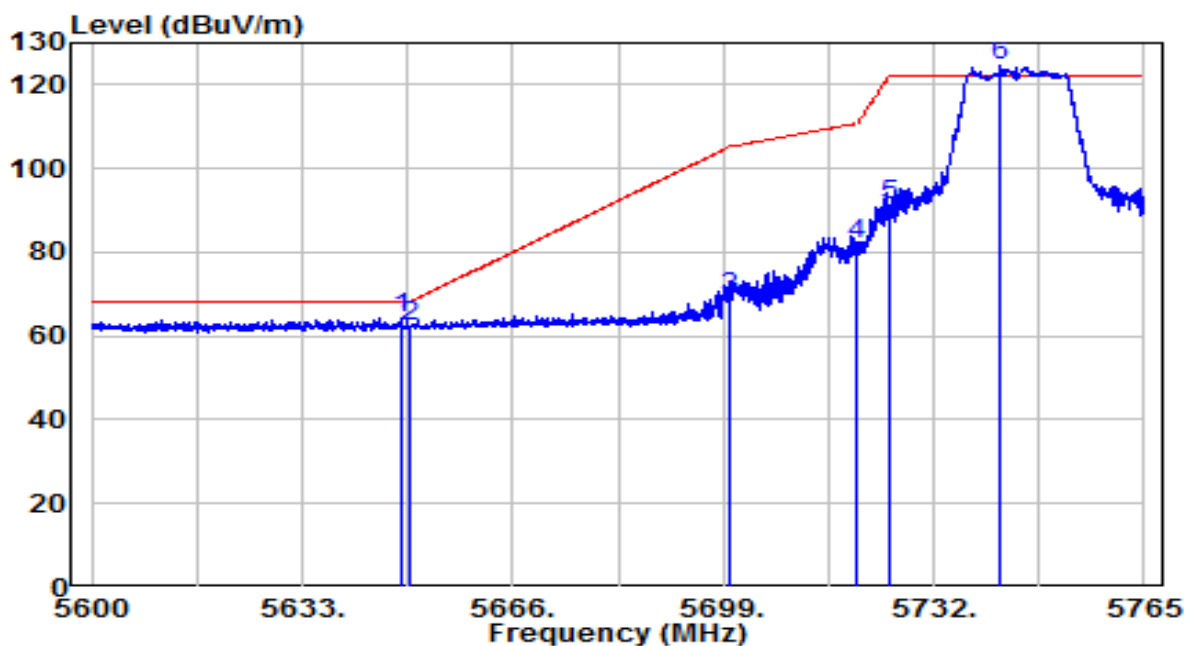


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5648.428	43.57	20.75	64.32	-3.88	68.20	Peak
2	5650.000	41.40	20.76	62.16	-6.04	68.20	Peak
3	5700.000	48.41	20.92	69.33	-35.87	105.20	Peak
4	5720.000	60.94	20.98	81.92	-28.88	110.80	Peak
5	5725.000	70.15	21.00	91.15	-31.05	122.20	Peak
6	* 5742.560	103.32	21.06	124.38	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6000 次世代 Wi-Fi 路由器	Date of Test	2021-06-26
Factor	BBHA 9120D	Temp. / Humidity	23.2°C/47.9%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11a at Channel 5825MHz	Test Voltage	110V/60Hz

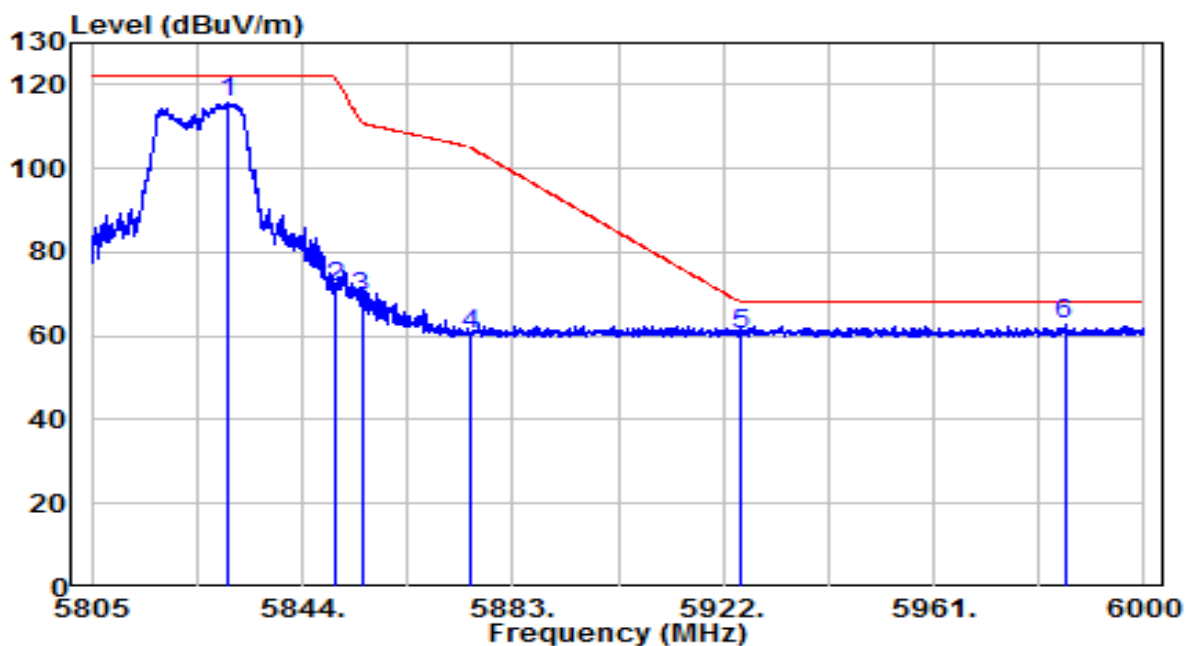


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5830.058	94.42	21.34	115.76	N/A	N/A	Peak
2	5850.000	50.39	21.40	71.80	-50.40	122.20	Peak
3	5855.000	47.70	21.42	69.12	-41.68	110.80	Peak
4	5875.000	38.64	21.49	60.13	-45.07	105.20	Peak
5	5925.000	38.81	21.65	60.46	-7.74	68.20	Peak
6	* 5985.277	41.00	21.84	62.84	-5.36	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6000 次世代 Wi-Fi 路由器	Date of Test	2021-06-26
Factor	BBHA 9120D	Temp. / Humidity	23.2°C/47.9%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11a at Channel 5825MHz	Test Voltage	110V/60Hz

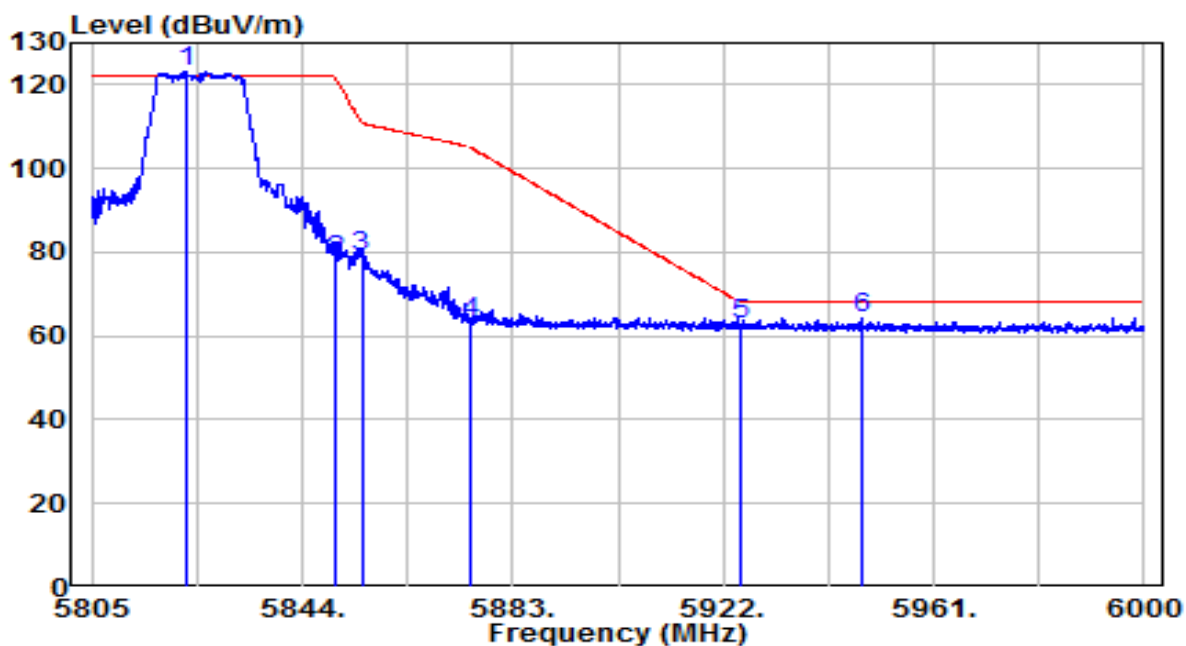


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5822.453	102.01	21.31	123.32	N/A	N/A	Peak
2		5850.000	56.77	21.40	78.18	-44.02	122.20	Peak
3		5855.000	57.60	21.42	79.02	-31.78	110.80	Peak
4		5875.000	42.01	21.49	63.50	-41.70	105.20	Peak
5		5925.000	41.20	21.65	62.85	-5.35	68.20	Peak
6		5947.545	42.71	21.72	64.43	-3.77	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6000 次世代 Wi-Fi 路由器	Date of Test	2021-06-26
Factor	BBHA 9120D	Temp. / Humidity	23.2°C/47.9%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT20 at Channel 5180MHz	Test Voltage	110V/60Hz

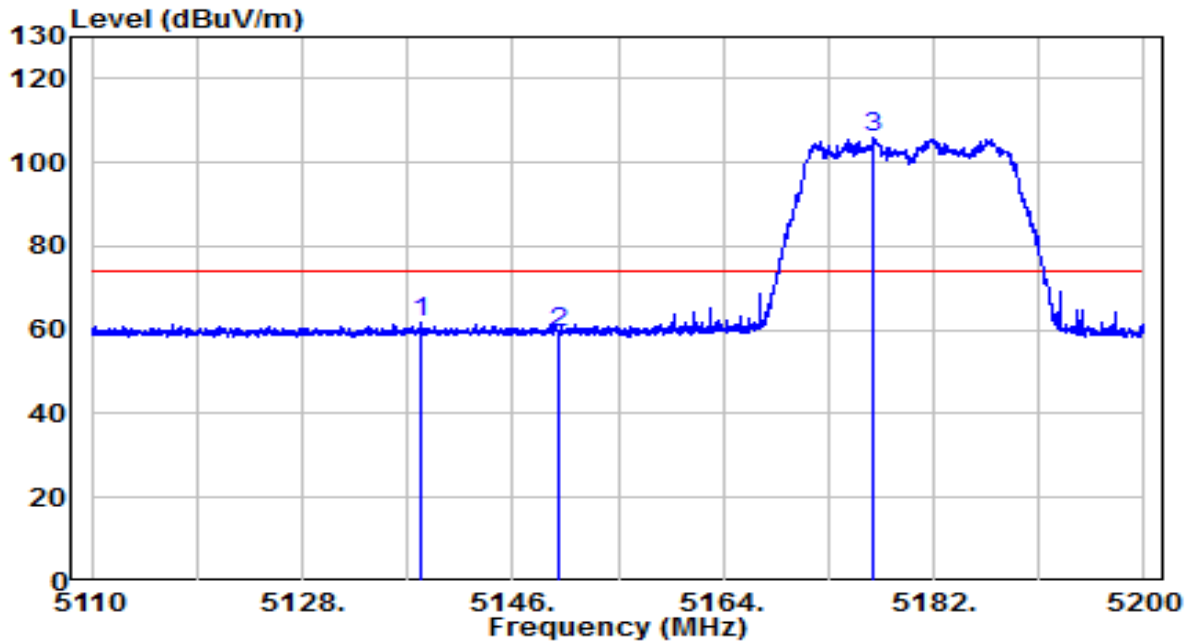


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5138.035	41.76	19.89	61.65	-12.35	74.00	Peak
2	5150.000	39.66	19.91	59.57	-14.44	74.00	Peak
3	* 5176.870	86.21	19.93	106.15	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6000 次世代 Wi-Fi 路由器	Date of Test	2021-06-26
Factor	BBHA 9120D	Temp. / Humidity	23.2°C/47.9%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT20 at Channel 5180MHz	Test Voltage	110V/60Hz

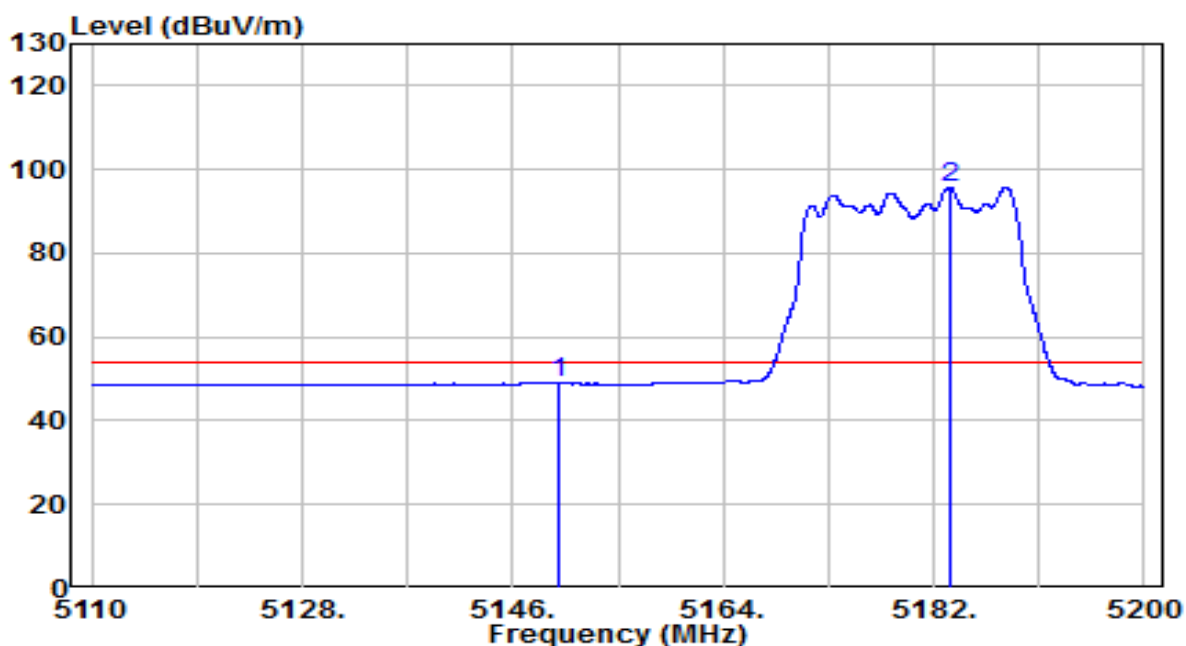


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5150.000	28.96	19.91	48.87	-5.13	54.00	Average
2	* 5183.350	75.74	19.94	95.68	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6000 次世代 Wi-Fi 路由器	Date of Test	2021-06-26
Factor	BBHA 9120D	Temp. / Humidity	23.2°C/47.9%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT20 at Channel 5180MHz	Test Voltage	110V/60Hz

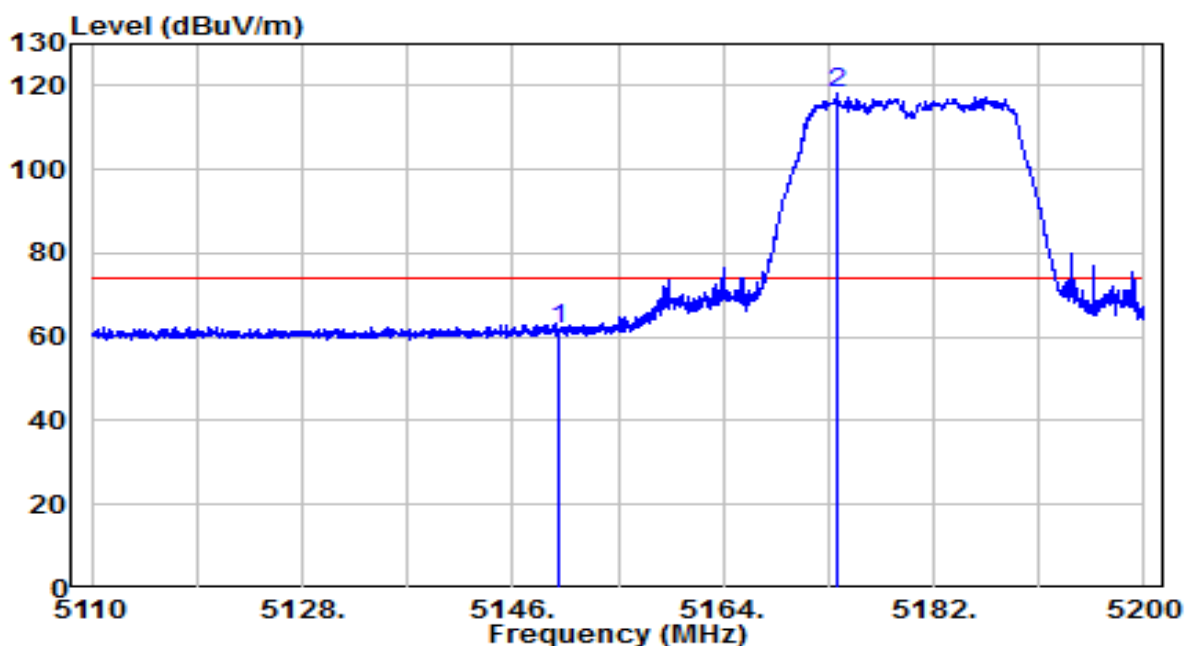


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5150.000	41.97	19.91	61.88	-12.12	74.00	Peak
2	* 5173.675	98.18	19.93	118.11	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6000 次世代 Wi-Fi 路由器	Date of Test	2021-06-26
Factor	BBHA 9120D	Temp. / Humidity	23.2°C/47.9%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT20 at Channel 5180MHz	Test Voltage	110V/60Hz

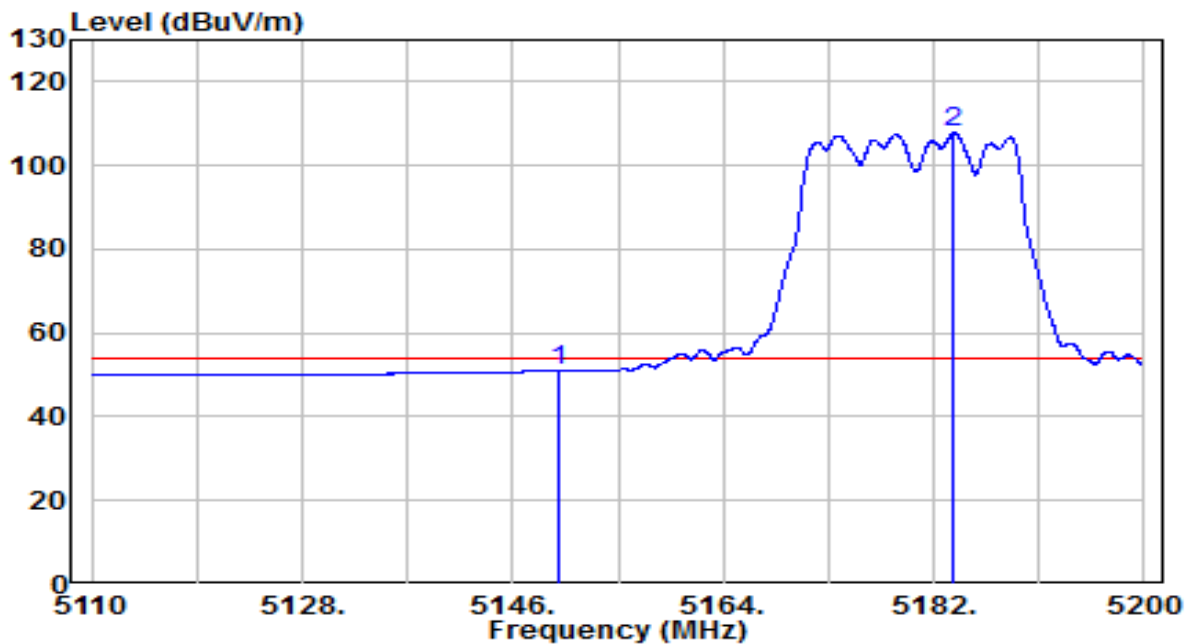


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5150.000	30.97	19.91	50.88	-3.12	54.00	Average
2	* 5183.755	87.78	19.94	107.72	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6000 次世代 Wi-Fi 路由器	Date of Test	2021-06-26
Factor	BBHA 9120D	Temp. / Humidity	23.2°C/47.9%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT20 at Channel 5320MHz	Test Voltage	110V/60Hz

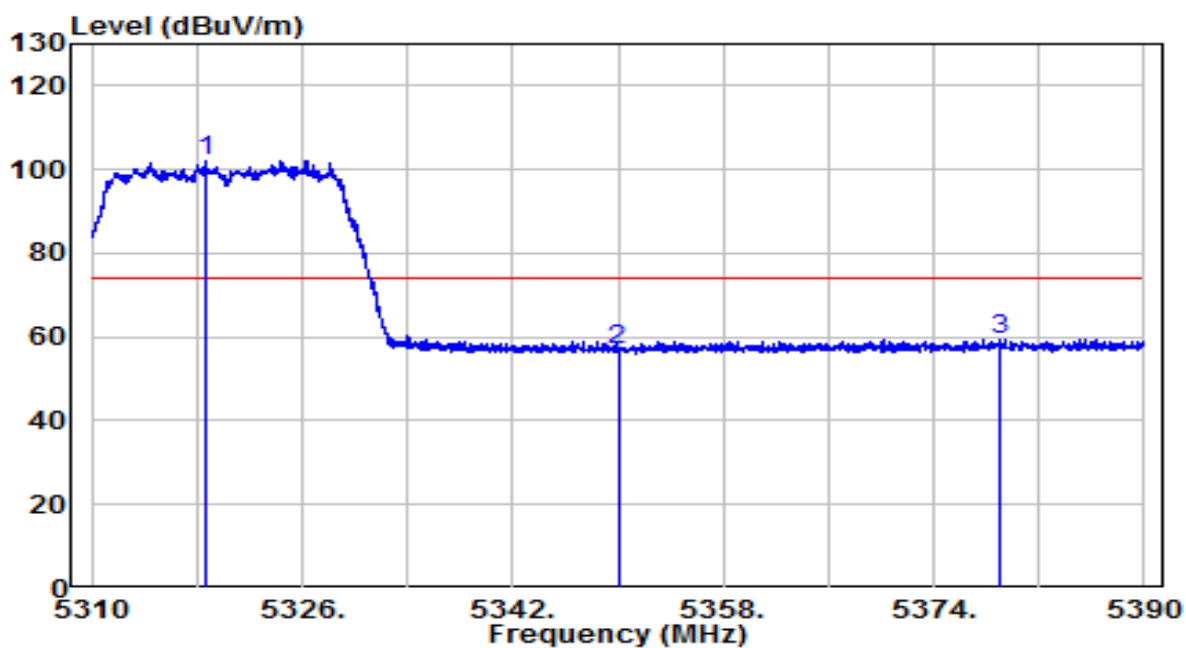


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5318.600	81.90	20.08	101.98	N/A	N/A	Peak
2		5350.000	36.63	20.11	56.74	-17.26	74.00	Peak
3		5379.120	39.34	20.14	59.48	-14.52	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6000 次世代 Wi-Fi 路由器	Date of Test	2021-06-26
Factor	BBHA 9120D	Temp. / Humidity	23.2°C/47.9%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT20 at Channel 5320MHz	Test Voltage	110V/60Hz

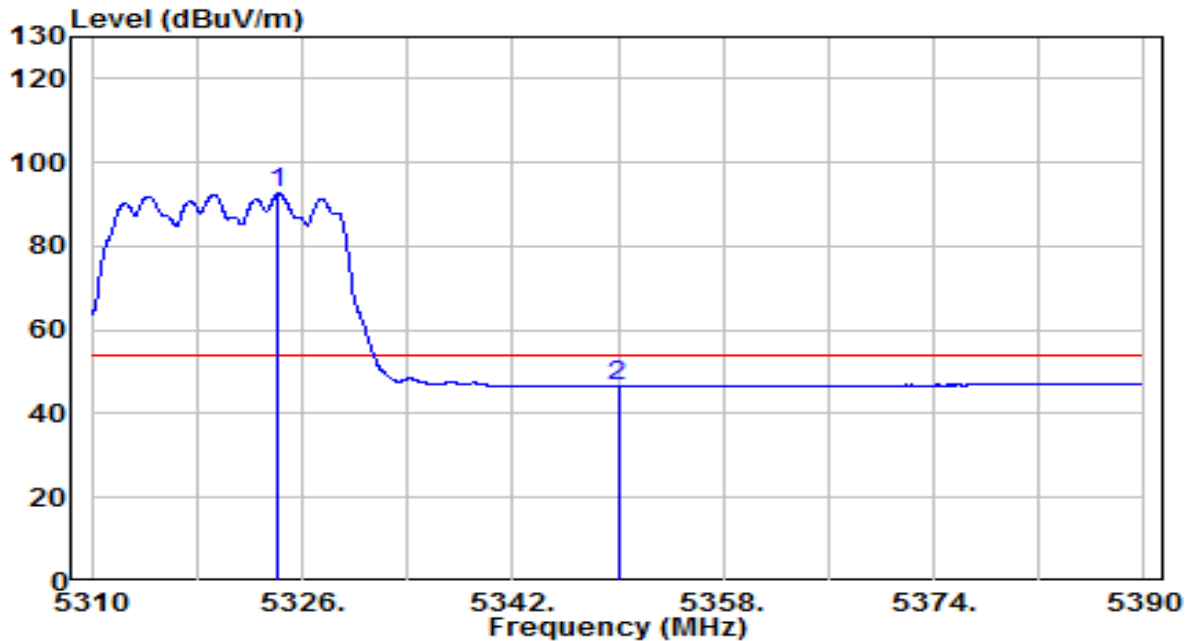


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	* 5324.200	72.39	20.09	92.47	N/A	N/A	Average
2	5350.000	26.30	20.11	46.41	-7.59	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6000 次世代 Wi-Fi 路由器	Date of Test	2021-06-26
Factor	BBHA 9120D	Temp. / Humidity	23.2°C/47.9%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT20 at Channel 5320MHz	Test Voltage	110V/60Hz

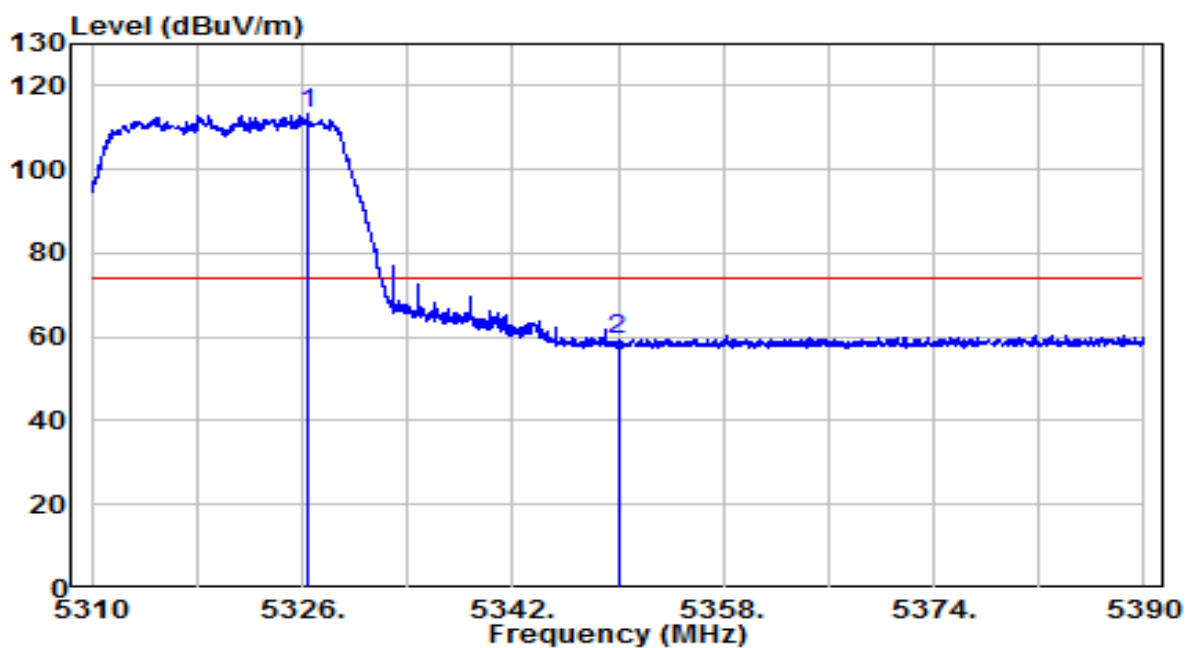


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	* 5326.440	93.40	20.09	113.49	N/A	N/A	Peak
2	5350.000	39.02	20.11	59.14	-14.86	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6000 次世代 Wi-Fi 路由器	Date of Test	2021-06-26
Factor	BBHA 9120D	Temp. / Humidity	23.2°C/47.9%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT20 at Channel 5320MHz	Test Voltage	110V/60Hz

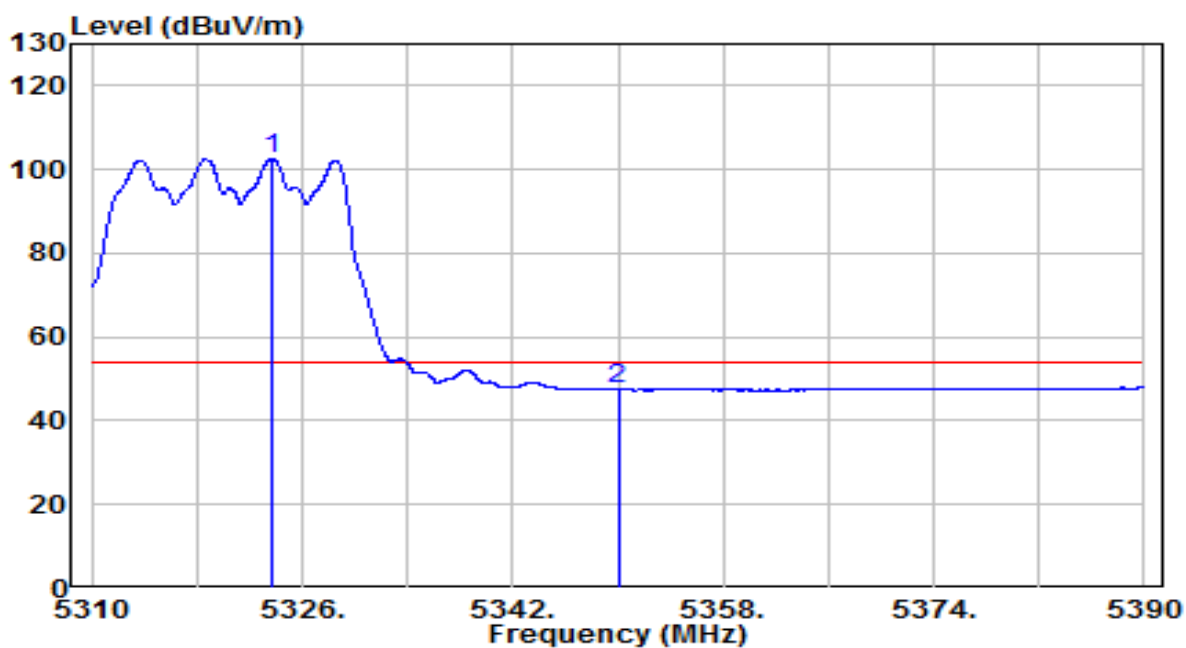


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5323.640	82.43	20.09	102.51	N/A	N/A	Average
2		5350.000	27.28	20.11	47.40	-6.60	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6000 次世代 Wi-Fi 路由器	Date of Test	2021-06-26
Factor	BBHA 9120D	Temp. / Humidity	23.2°C/47.9%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT20 at Channel 5500MHz	Test Voltage	110V/60Hz

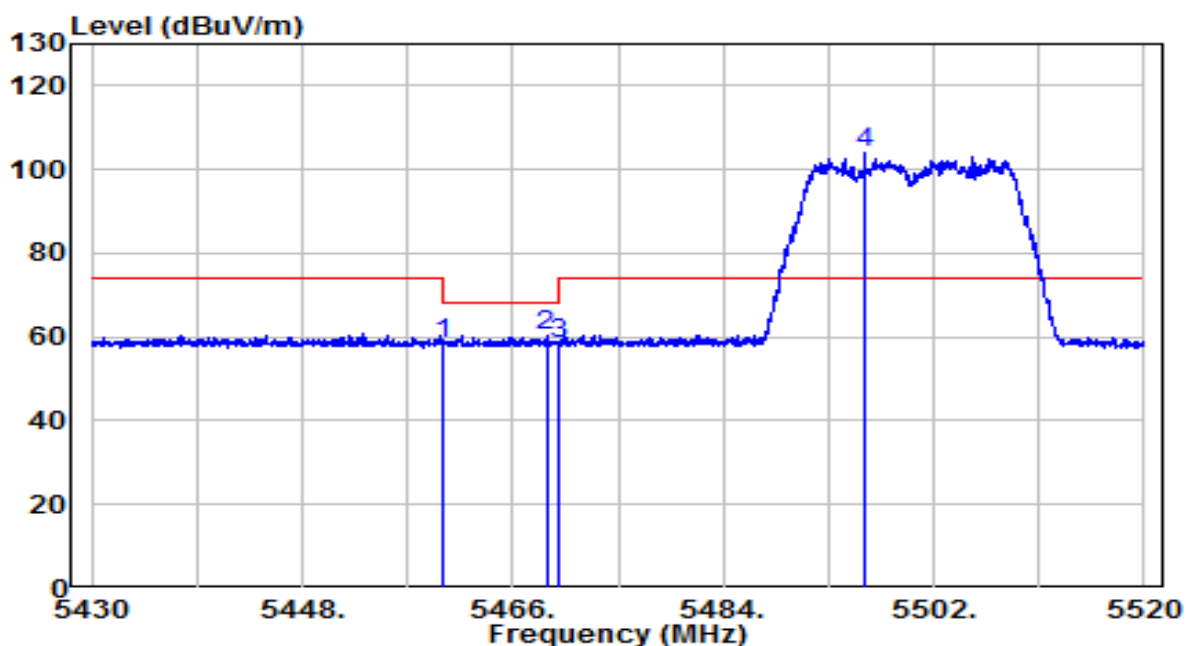


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5460.000	38.13	20.23	58.35	-9.85	68.20	Peak
2	5468.880	40.04	20.24	60.27	-7.93	68.20	Peak
3	5470.000	38.08	20.24	58.32	-9.88	68.20	Peak
4	* 5496.105	83.61	20.27	103.88	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6000 次世代 Wi-Fi 路由器	Date of Test	2021-06-26
Factor	BBHA 9120D	Temp. / Humidity	23.2°C/47.9%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT20 at Channel 5500MHz	Test Voltage	110V/60Hz

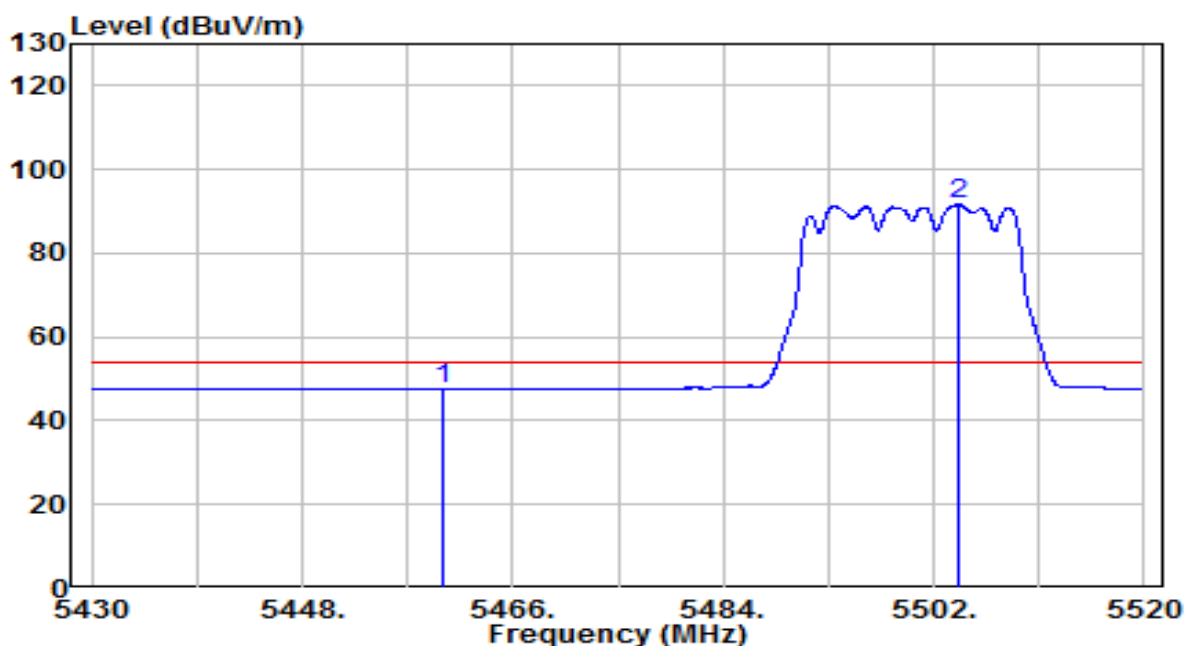


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5460.000	27.33	20.23	47.56	-6.44	54.00	Average
2	* 5504.115	71.39	20.28	91.68	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6000 次世代 Wi-Fi 路由器	Date of Test	2021-06-26
Factor	BBHA 9120D	Temp. / Humidity	23.2°C/47.9%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT20 at Channel 5500MHz	Test Voltage	110V/60Hz

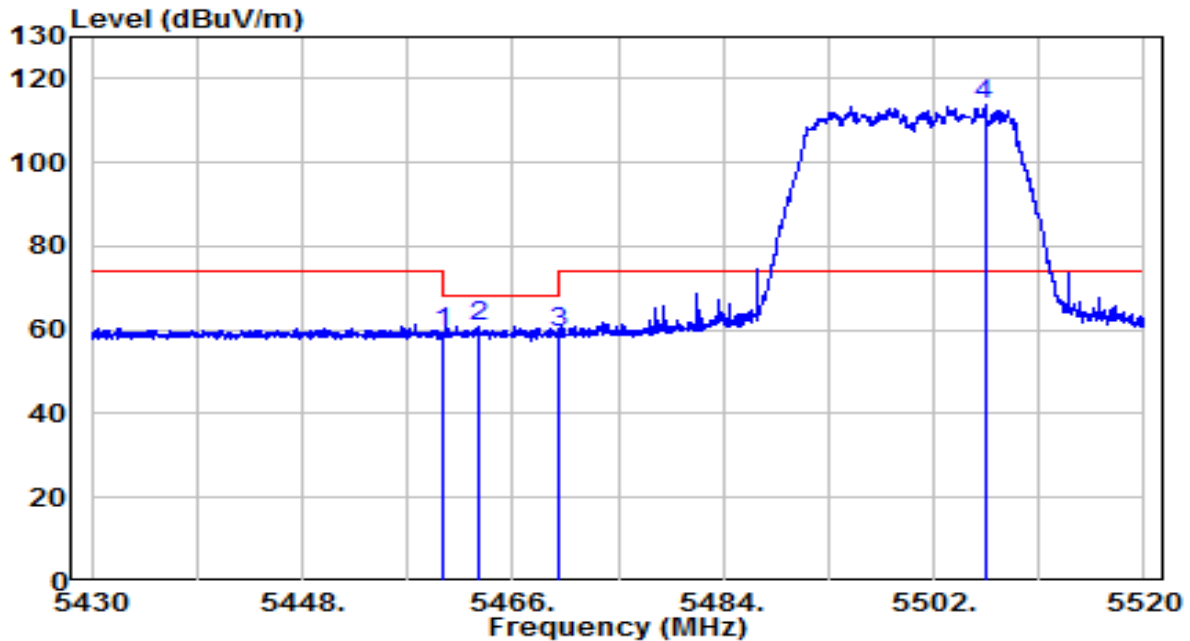


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5460.000	38.90	20.23	59.13	-9.07	68.20	Peak
2	5463.030	40.68	20.23	60.91	-7.29	68.20	Peak
3	5470.000	39.14	20.24	59.38	-8.82	68.20	Peak
4	* 5506.365	93.58	20.29	113.87	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6000 次世代 Wi-Fi 路由器	Date of Test	2021-06-26
Factor	BBHA 9120D	Temp. / Humidity	23.2°C/47.9%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT20 at Channel 5500MHz	Test Voltage	110V/60Hz

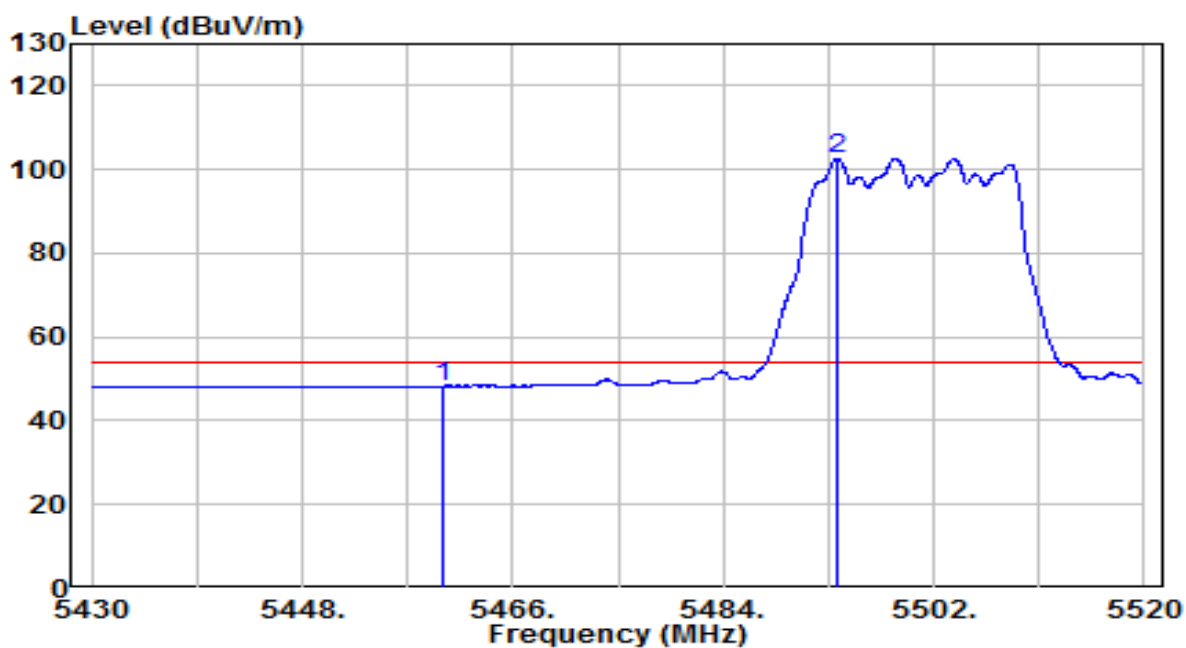


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5460.000	28.04	20.23	48.27	-5.73	54.00	Average
2	* 5493.765	82.34	20.26	102.61	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6000 次世代 Wi-Fi 路由器	Date of Test	2021-06-26
Factor	BBHA 9120D	Temp. / Humidity	23.2°C/47.9%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT20 at Channel 5700MHz	Test Voltage	110V/60Hz

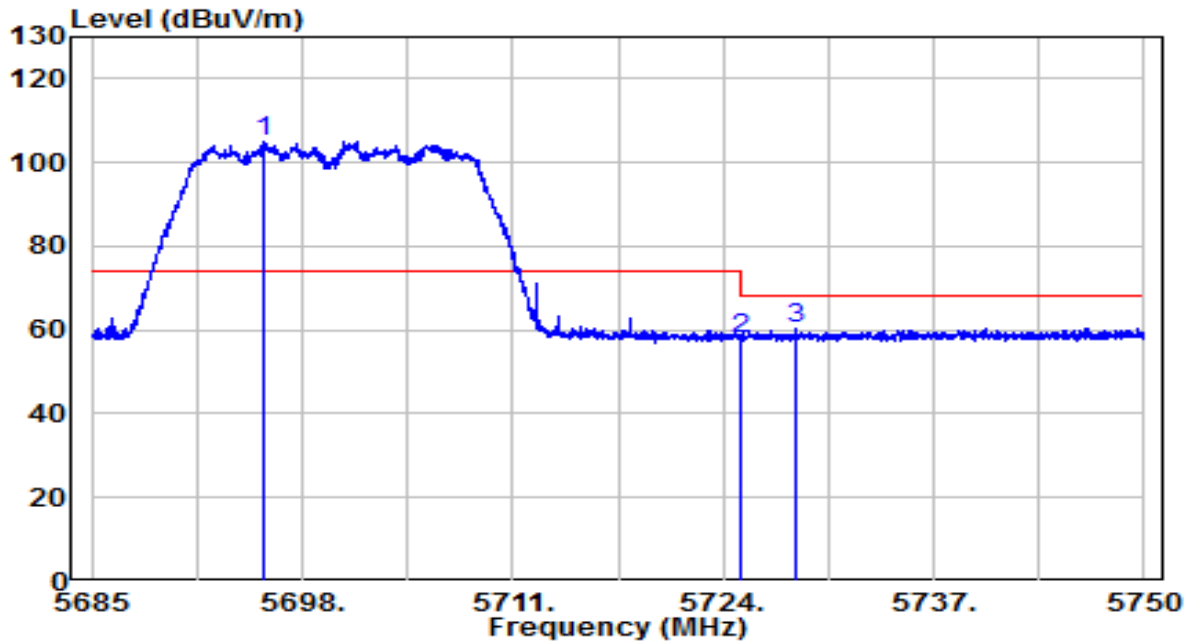


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5695.660	84.21	20.90	105.11	N/A	N/A	Peak
2		5725.000	37.07	21.00	58.07	-10.13	68.20	Peak
3		5728.518	39.38	21.01	60.39	-7.81	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6000 次世代 Wi-Fi 路由器	Date of Test	2021-06-26
Factor	BBHA 9120D	Temp. / Humidity	23.2°C/47.9%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT20 at Channel 5700MHz	Test Voltage	110V/60Hz

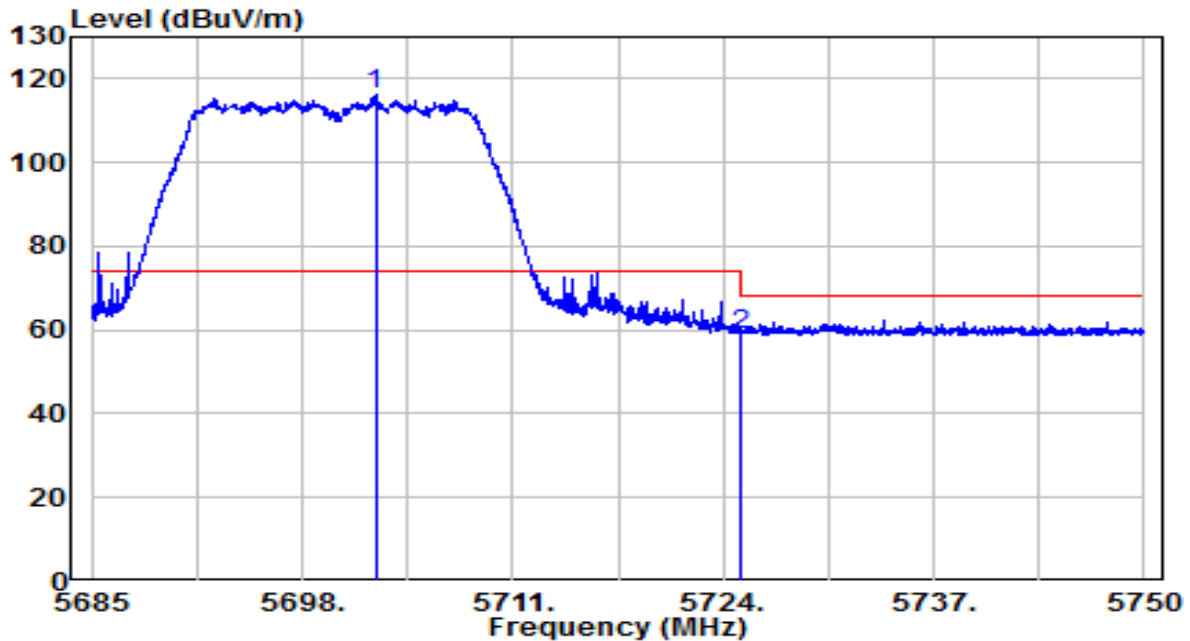


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5702.518	95.14	20.93	116.07	N/A	N/A	Peak
2		5725.000	38.07	21.00	59.07	-9.13	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6000 次世代 Wi-Fi 路由器	Date of Test	2021-06-26
Factor	BBHA 9120D	Temp. / Humidity	23.2°C/47.9%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT20 at Channel 5745MHz	Test Voltage	110V/60Hz

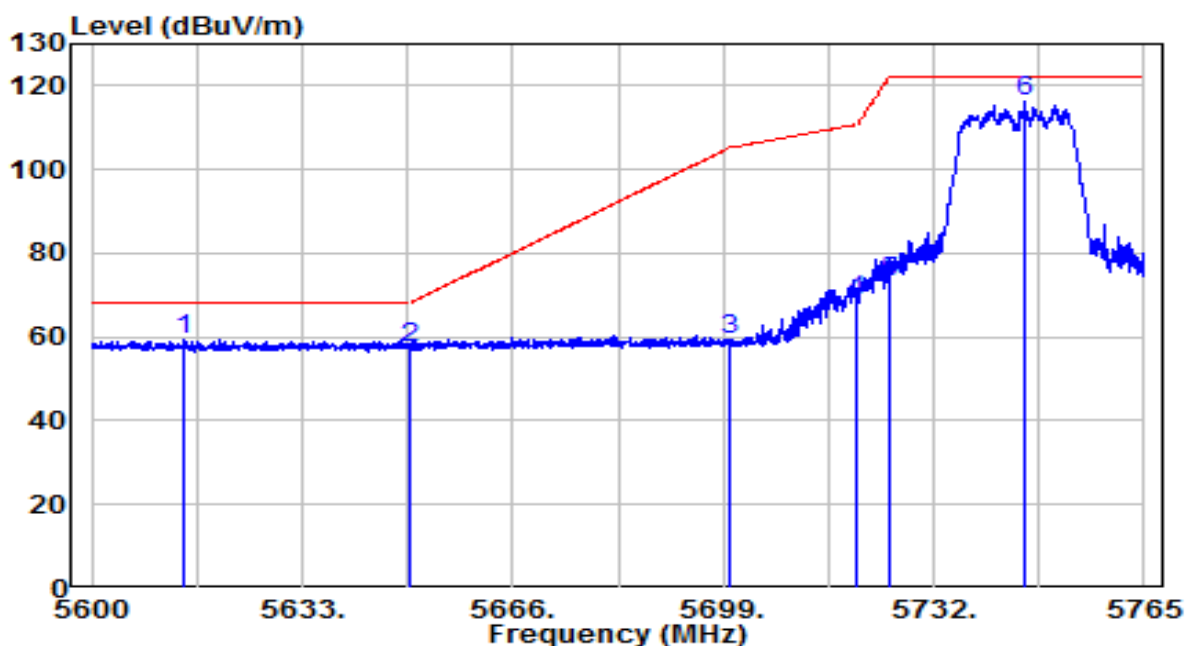


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5614.438	38.87	20.64	59.51	-8.69	68.20	Peak
2	5650.000	36.85	20.76	57.61	-10.59	68.20	Peak
3	5700.000	38.34	20.92	59.25	-45.95	105.20	Peak
4	5720.000	47.81	20.98	68.79	-42.01	110.80	Peak
5	5725.000	52.31	21.00	73.31	-48.89	122.20	Peak
6	* 5746.355	95.18	21.07	116.25	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6000 次世代 Wi-Fi 路由器	Date of Test	2021-06-26
Factor	BBHA 9120D	Temp. / Humidity	23.2°C/47.9%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT20 at Channel 5745MHz	Test Voltage	110V/60Hz

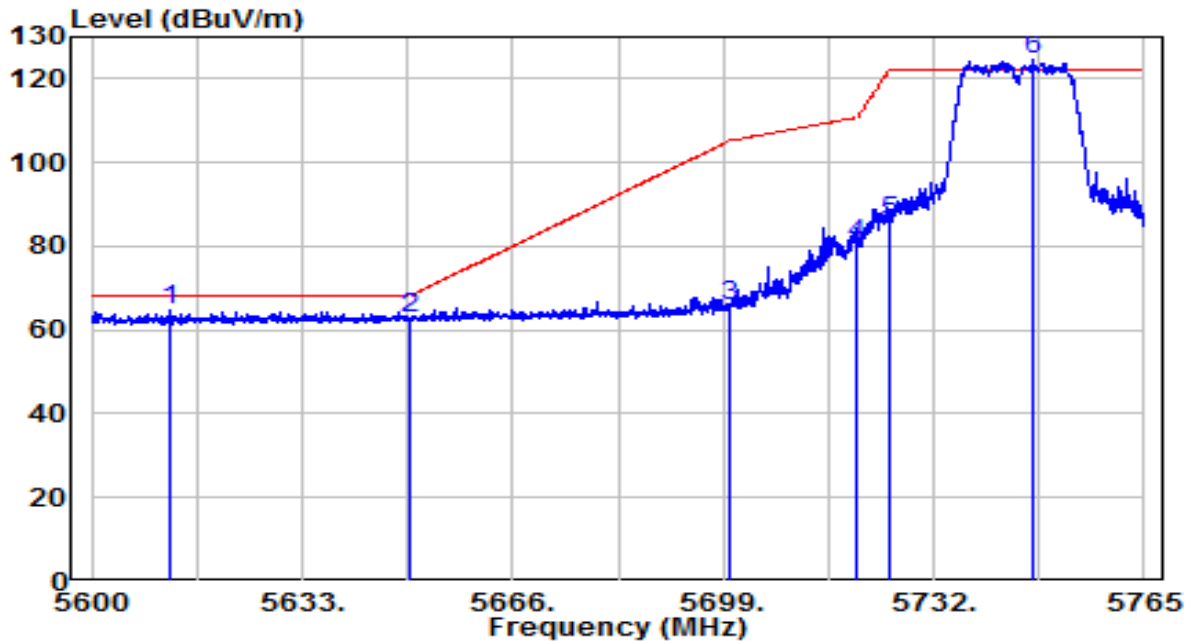


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5612.375	43.91	20.63	64.55	-3.65	68.20	Peak
2	5650.000	41.94	20.76	62.70	-5.50	68.20	Peak
3	5700.000	44.93	20.92	65.85	-39.35	105.20	Peak
4	5720.000	59.63	20.98	80.61	-30.19	110.80	Peak
5	5725.000	65.00	21.00	86.00	-36.20	122.20	Peak
6	* 5747.675	103.55	21.07	124.63	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6000 次世代 Wi-Fi 路由器	Date of Test	2021-06-26
Factor	BBHA 9120D	Temp. / Humidity	23.2°C/47.9%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT20 at Channel 5825MHz	Test Voltage	110V/60Hz

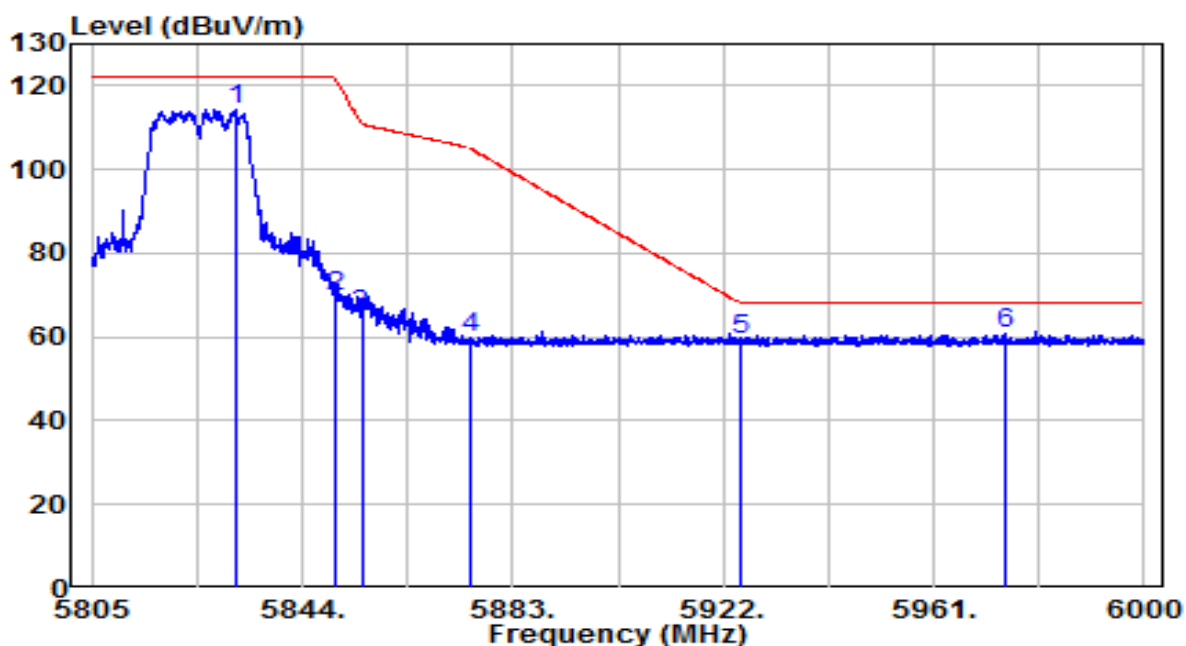


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5831.520	93.11	21.34	114.46	N/A	N/A	Peak
2	5850.000	48.23	21.40	69.64	-52.56	122.20	Peak
3	5855.000	43.84	21.42	65.26	-45.54	110.80	Peak
4	5875.000	38.31	21.49	59.79	-45.41	105.20	Peak
5	5925.000	37.77	21.65	59.42	-8.78	68.20	Peak
6	* 5974.163	38.91	21.81	60.72	-7.48	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6000 次世代 Wi-Fi 路由器	Date of Test	2021-06-26
Factor	BBHA 9120D	Temp. / Humidity	23.2°C/47.9%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT20 at Channel 5825MHz	Test Voltage	110V/60Hz

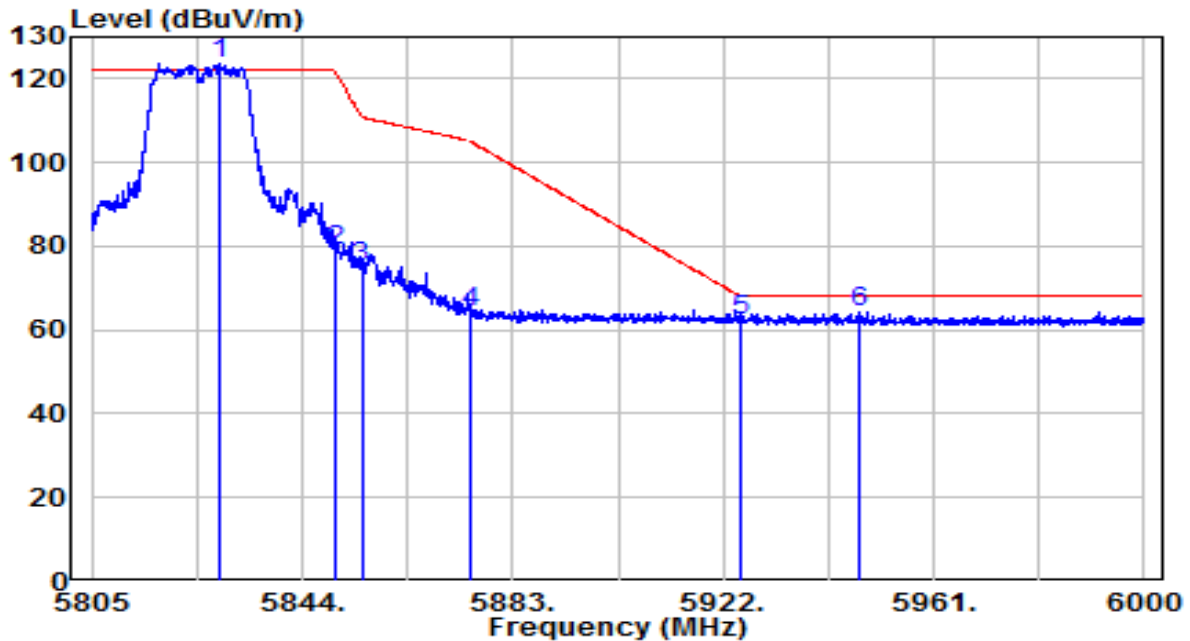


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5828.790	102.23	21.34	123.56	N/A	N/A	Peak
2		5850.000	57.57	21.40	78.98	-43.22	122.20	Peak
3		5855.000	53.87	21.42	75.29	-35.51	110.80	Peak
4		5875.000	42.99	21.49	64.48	-40.72	105.20	Peak
5		5925.000	40.61	21.65	62.26	-5.94	68.20	Peak
6		5947.252	42.50	21.72	64.22	-3.98	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6000 次世代 Wi-Fi 路由器	Date of Test	2021-06-26
Factor	BBHA 9120D	Temp. / Humidity	23.2°C/47.9%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT40 at Channel 5190MHz	Test Voltage	110V/60Hz

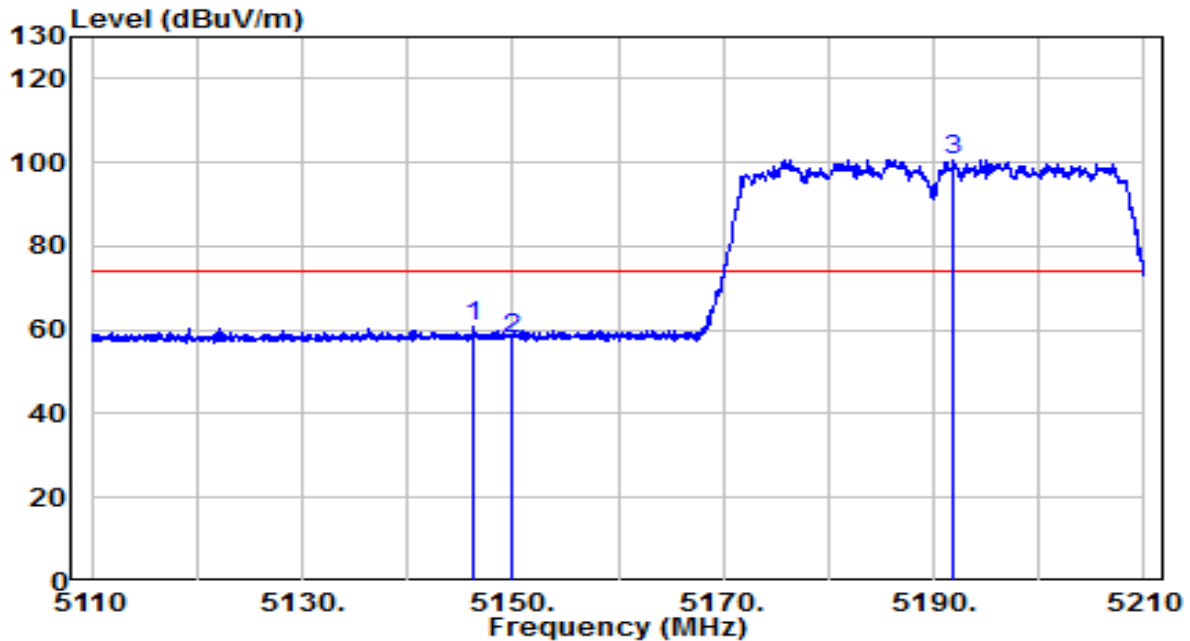


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5146.300	40.78	19.90	60.68	-13.32	74.00	Peak
2	5150.000	38.20	19.91	58.11	-15.89	74.00	Peak
3	* 5191.950	80.76	19.95	100.71	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6000 次世代 Wi-Fi 路由器	Date of Test	2021-06-26
Factor	BBHA 9120D	Temp. / Humidity	23.2°C/47.9%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT40 at Channel 5190MHz	Test Voltage	110V/60Hz

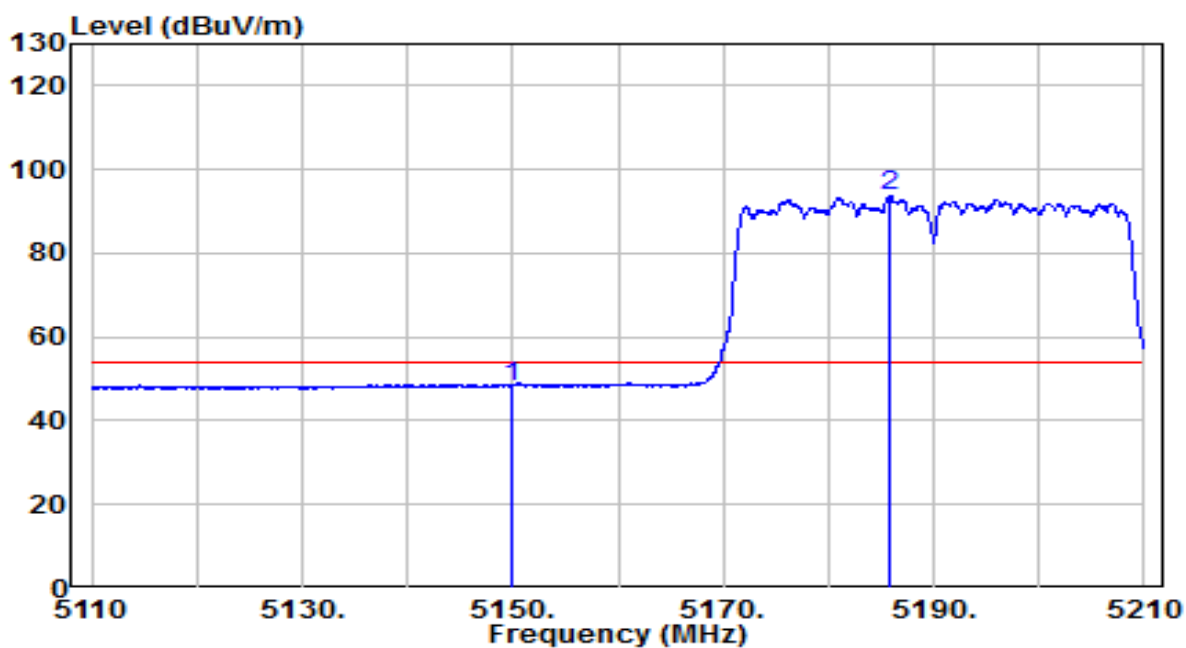


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5150.000	28.41	19.91	48.32	-5.68	54.00	Average
2	* 5185.900	73.73	19.94	93.67	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preampifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6000 次世代 Wi-Fi 路由器	Date of Test	2021-06-26
Factor	BBHA 9120D	Temp. / Humidity	23.2°C/47.9%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT40 at Channel 5190MHz	Test Voltage	110V/60Hz

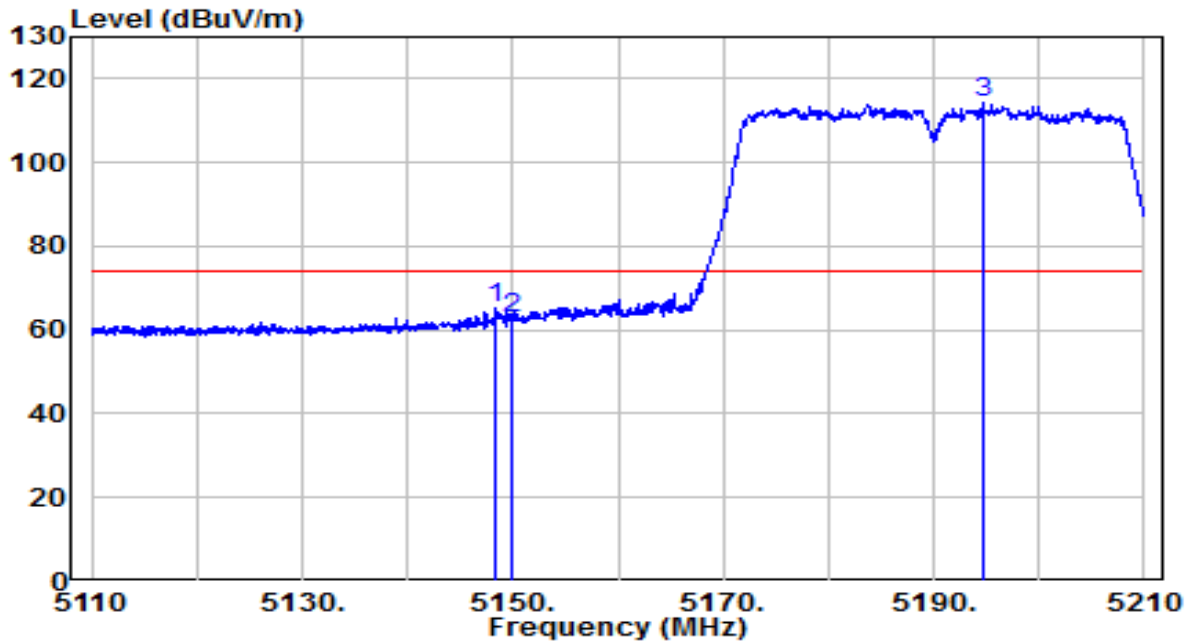


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5148.350	45.32	19.90	65.23	-8.77	74.00	Peak
2	5150.000	42.85	19.91	62.75	-11.25	74.00	Peak
3	* 5194.650	94.34	19.95	114.30	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6000 次世代 Wi-Fi 路由器	Date of Test	2021-06-26
Factor	BBHA 9120D	Temp. / Humidity	23.2°C/47.9%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT40 at Channel 5190MHz	Test Voltage	110V/60Hz

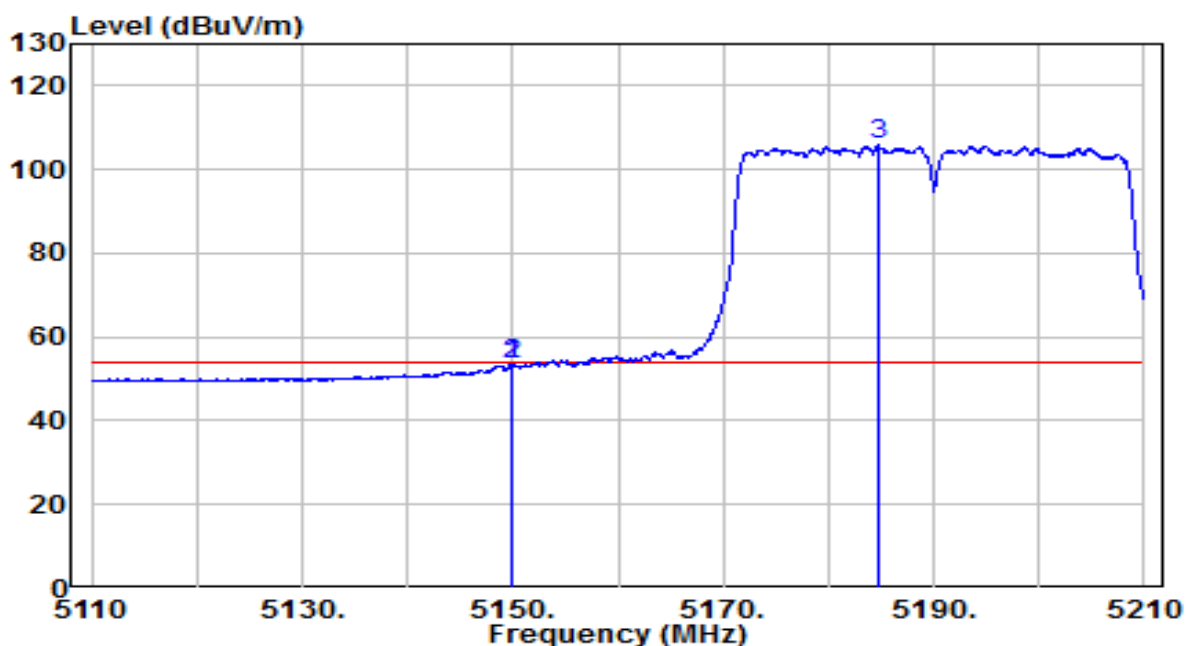


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5149.950	33.76	19.91	53.67	-0.33	54.00	Average
2	5150.000	33.53	19.91	53.44	-0.56	54.00	Average
3	* 5184.750	86.02	19.94	105.96	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6000 次世代 Wi-Fi 路由器	Date of Test	2021-06-26
Factor	BBHA 9120D	Temp. / Humidity	23.2°C/47.9%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT40 at Channel 5310MHz	Test Voltage	110V/60Hz

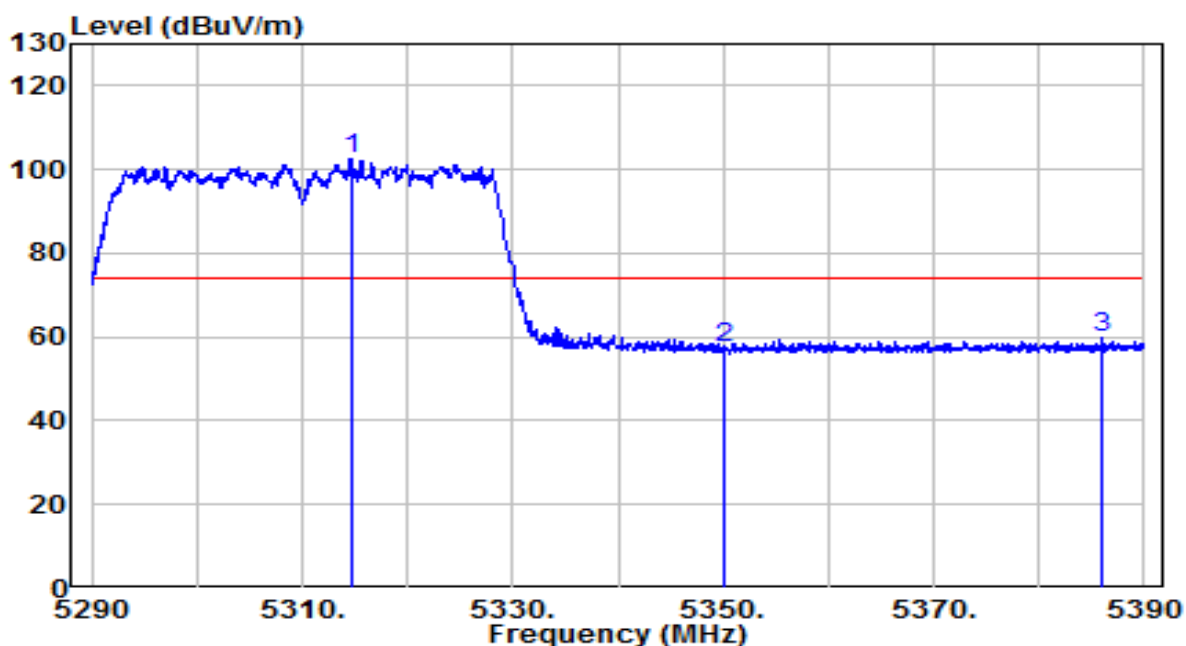


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5314.700	82.53	20.08	102.61	N/A	N/A	Peak
2		5350.000	37.24	20.11	57.35	-16.65	74.00	Peak
3		5386.100	39.62	20.15	59.77	-14.23	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6000 次世代 Wi-Fi 路由器	Date of Test	2021-06-26
Factor	BBHA 9120D	Temp. / Humidity	23.2°C/47.9%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT40 at Channel 5310MHz	Test Voltage	110V/60Hz

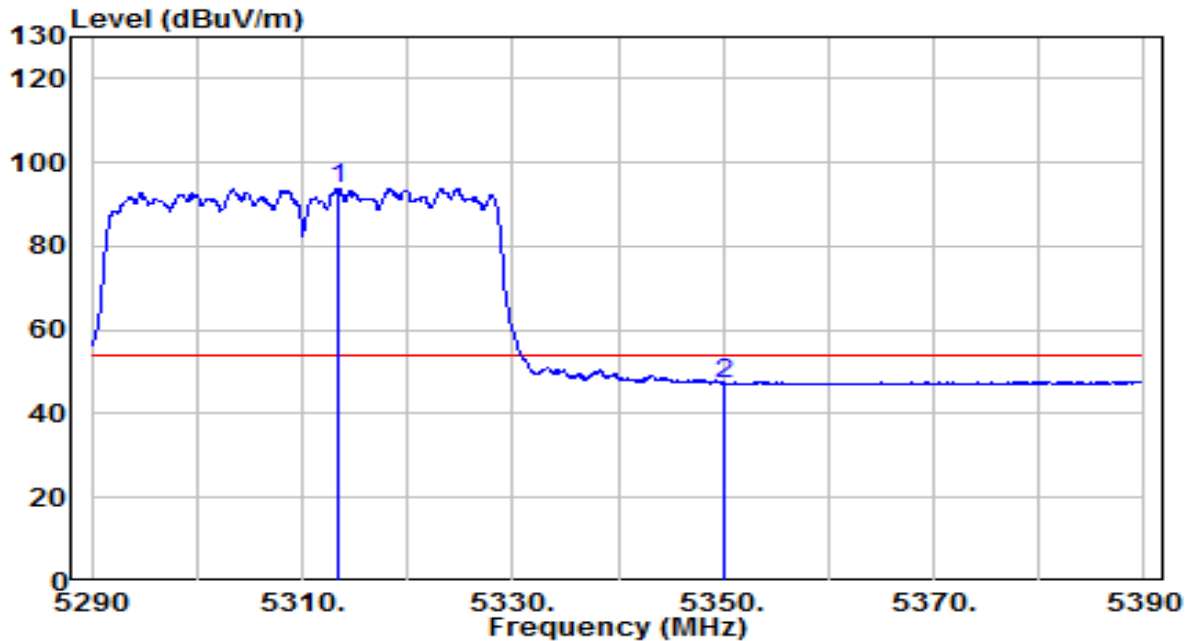


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5313.350	73.60	20.08	93.67	N/A	N/A	Average
2		5350.000	27.10	20.11	47.21	-6.79	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6000 次世代 Wi-Fi 路由器	Date of Test	2021-06-26
Factor	BBHA 9120D	Temp. / Humidity	23.2°C/47.9%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT40 at Channel 5310MHz	Test Voltage	110V/60Hz

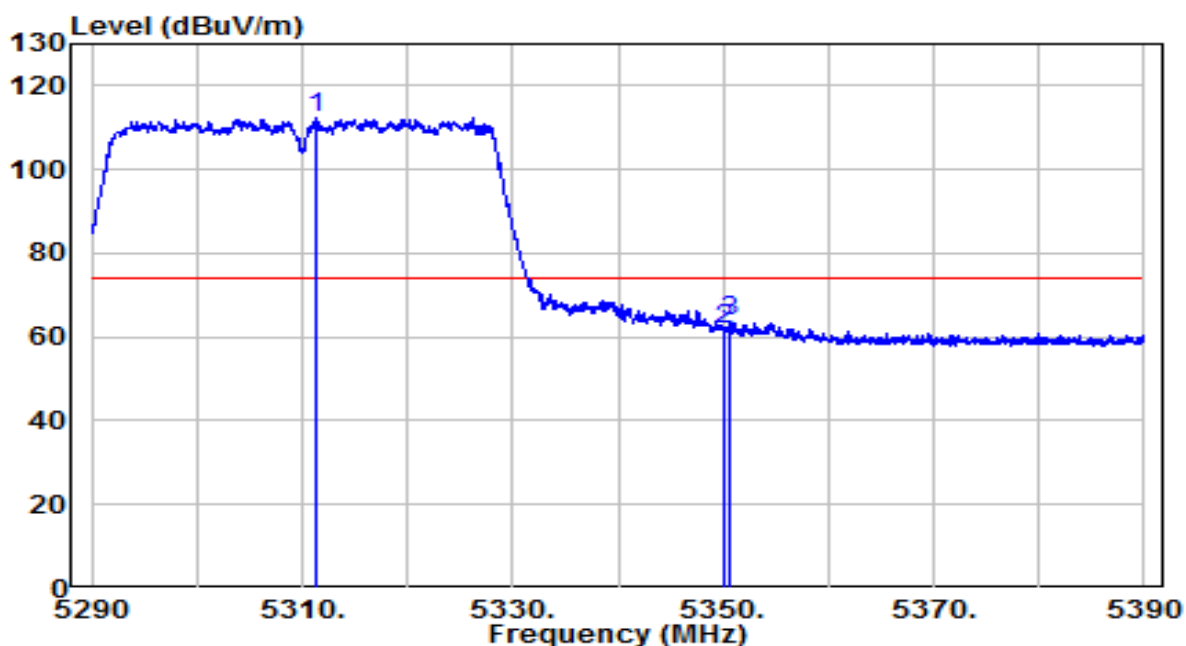


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5311.250	92.46	20.07	112.53	N/A	N/A	Peak
2		5350.000	41.88	20.11	61.99	-12.01	74.00	Peak
3		5350.700	43.42	20.11	63.53	-10.47	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6000 次世代 Wi-Fi 路由器	Date of Test	2021-06-26
Factor	BBHA 9120D	Temp. / Humidity	23.2°C/47.9%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT40 at Channel 5310MHz	Test Voltage	110V/60Hz

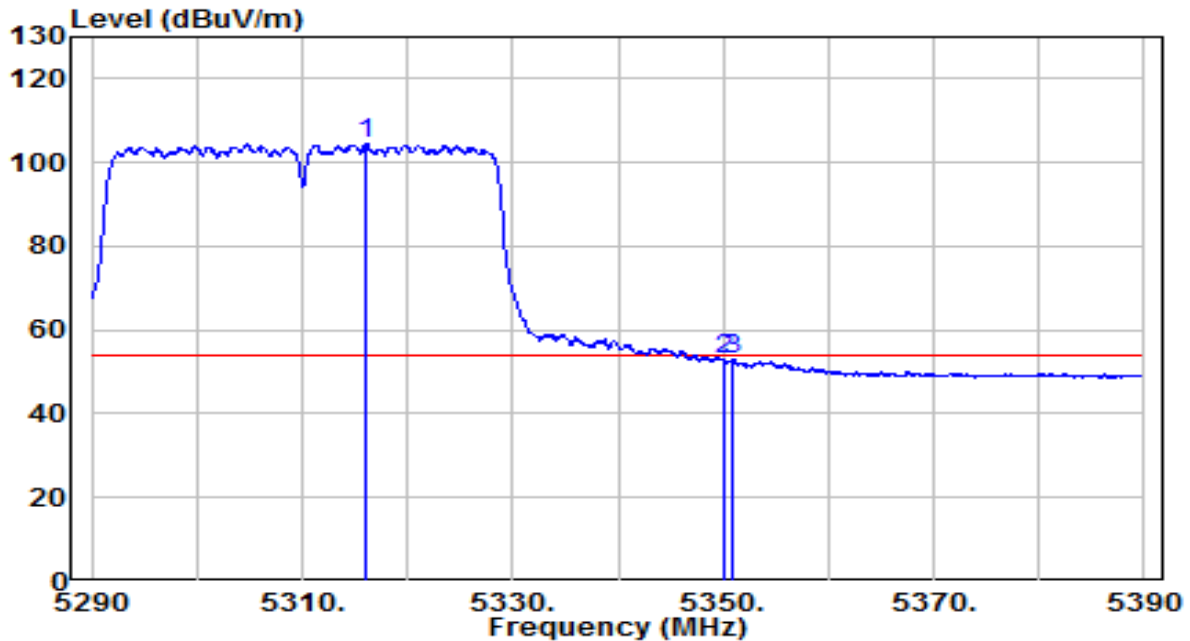


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5316.150	84.42	20.08	104.50	N/A	N/A	Average
2		5350.000	32.95	20.11	53.07	-0.93	54.00	Average
3		5350.900	33.00	20.11	53.11	-0.89	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6000 次世代 Wi-Fi 路由器	Date of Test	2021-06-26
Factor	BBHA 9120D	Temp. / Humidity	23.2°C/47.9%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT40 at Channel 5510MHz	Test Voltage	110V/60Hz

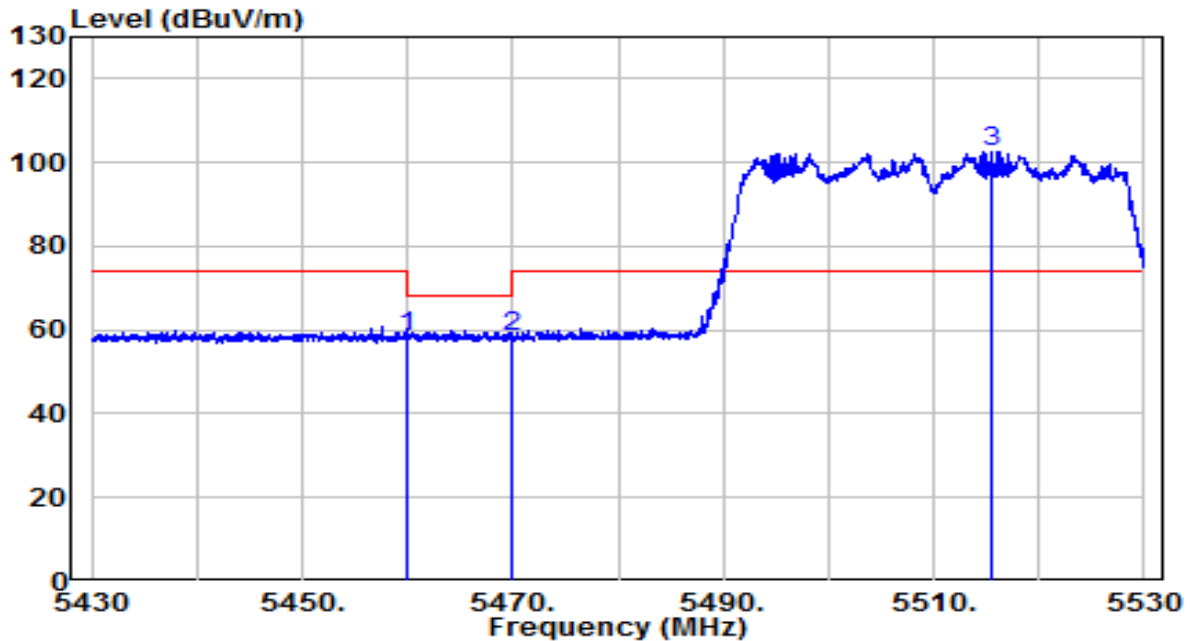


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5460.000	38.05	20.23	58.28	-9.92	68.20	Peak
2	5470.000	38.16	20.24	58.39	-9.81	68.20	Peak
3	* 5515.400	82.27	20.32	102.59	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6000 次世代 Wi-Fi 路由器	Date of Test	2021-06-26
Factor	BBHA 9120D	Temp. / Humidity	23.2°C/47.9%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT40 at Channel 5510MHz	Test Voltage	110V/60Hz

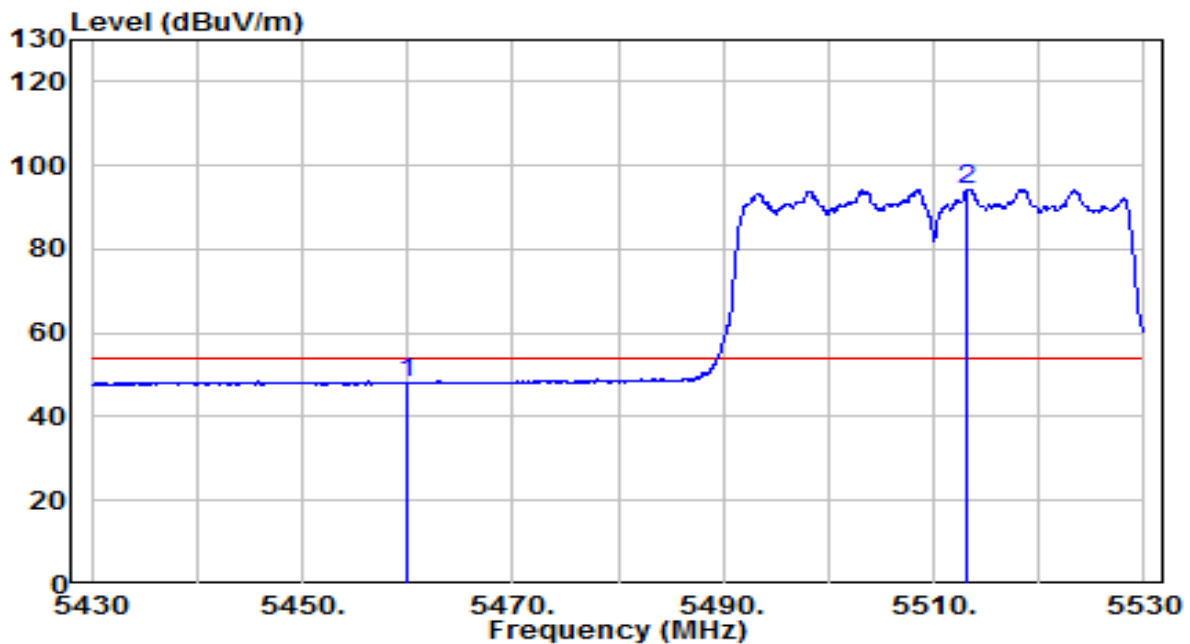


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5460.000	27.81	20.23	48.04	-5.96	54.00	Average
2	* 5513.250	74.11	20.31	94.42	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6000 次世代 Wi-Fi 路由器	Date of Test	2021-06-26
Factor	BBHA 9120D	Temp. / Humidity	23.2°C/47.9%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT40 at Channel 5510MHz	Test Voltage	110V/60Hz

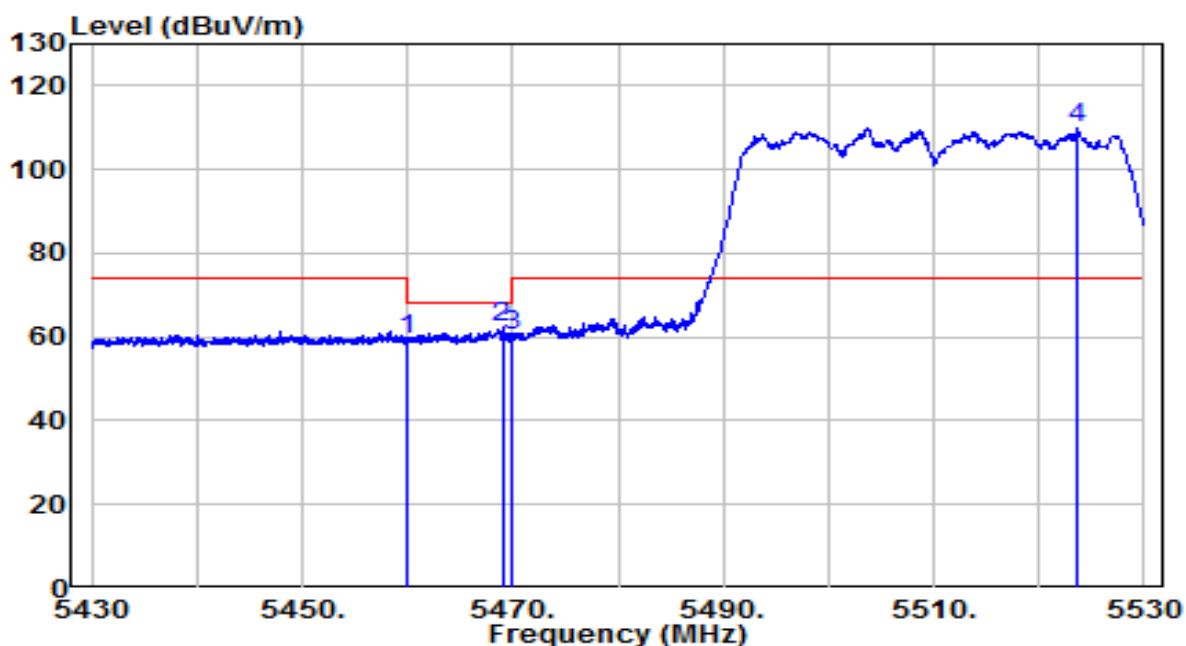


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5460.000	38.92	20.23	59.15	-9.05	68.20	Peak
2	5469.000	41.86	20.24	62.10	-6.10	68.20	Peak
3	5470.000	39.89	20.24	60.12	-8.08	68.20	Peak
4	* 5523.600	89.72	20.35	110.07	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6000 次世代 Wi-Fi 路由器	Date of Test	2021-06-26
Factor	BBHA 9120D	Temp. / Humidity	23.2°C/47.9%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT40 at Channel 5510MHz	Test Voltage	110V/60Hz

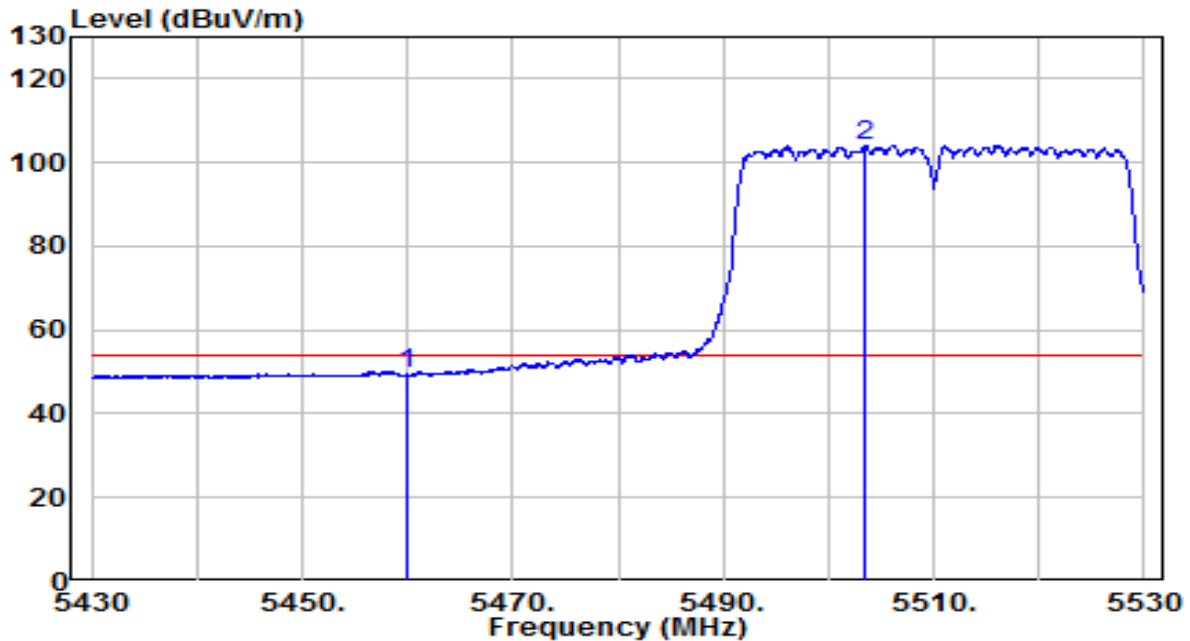


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5460.000	29.09	20.23	49.32	-4.68	54.00	Average
2	* 5503.500	83.76	20.28	104.04	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6000 次世代 Wi-Fi 路由器	Date of Test	2021-06-26
Factor	BBHA 9120D	Temp. / Humidity	23.2°C/47.9%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT40 at Channel 5670MHz	Test Voltage	110V/60Hz

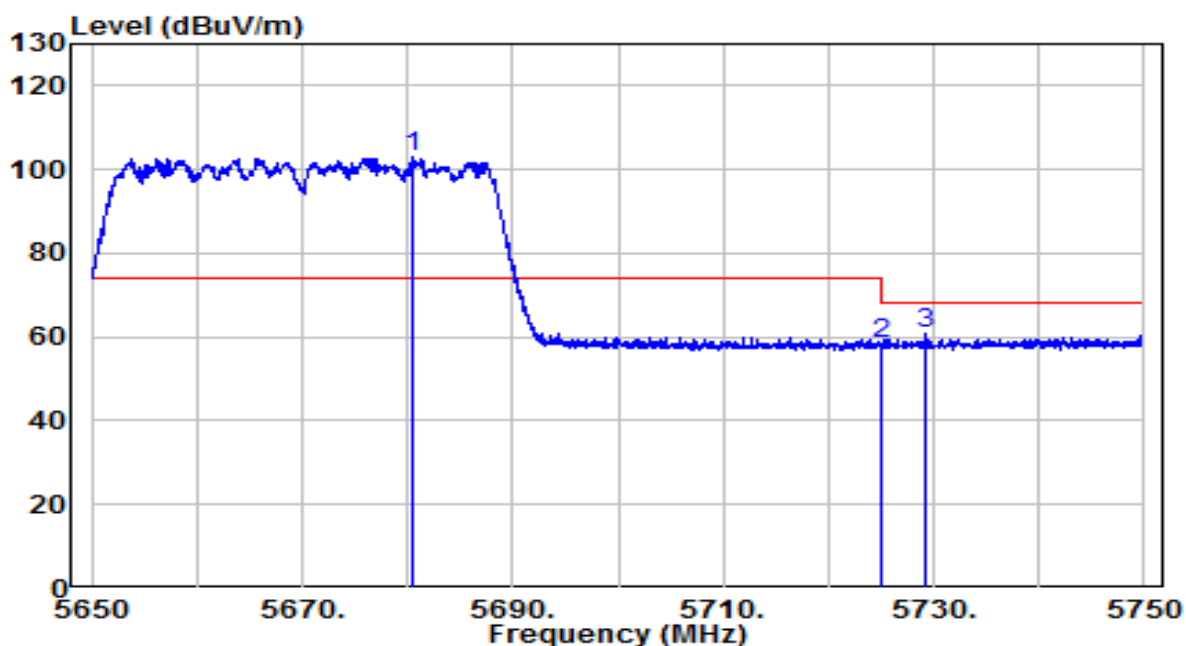


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5680.550	82.20	20.85	103.05	N/A	N/A	Peak
2		5725.000	37.16	21.00	58.16	-10.04	68.20	Peak
3		5729.300	39.69	21.01	60.70	-7.50	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6000 次世代 Wi-Fi 路由器	Date of Test	2021-06-26
Factor	BBHA 9120D	Temp. / Humidity	23.2°C/47.9%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT40 at Channel 5670MHz	Test Voltage	110V/60Hz

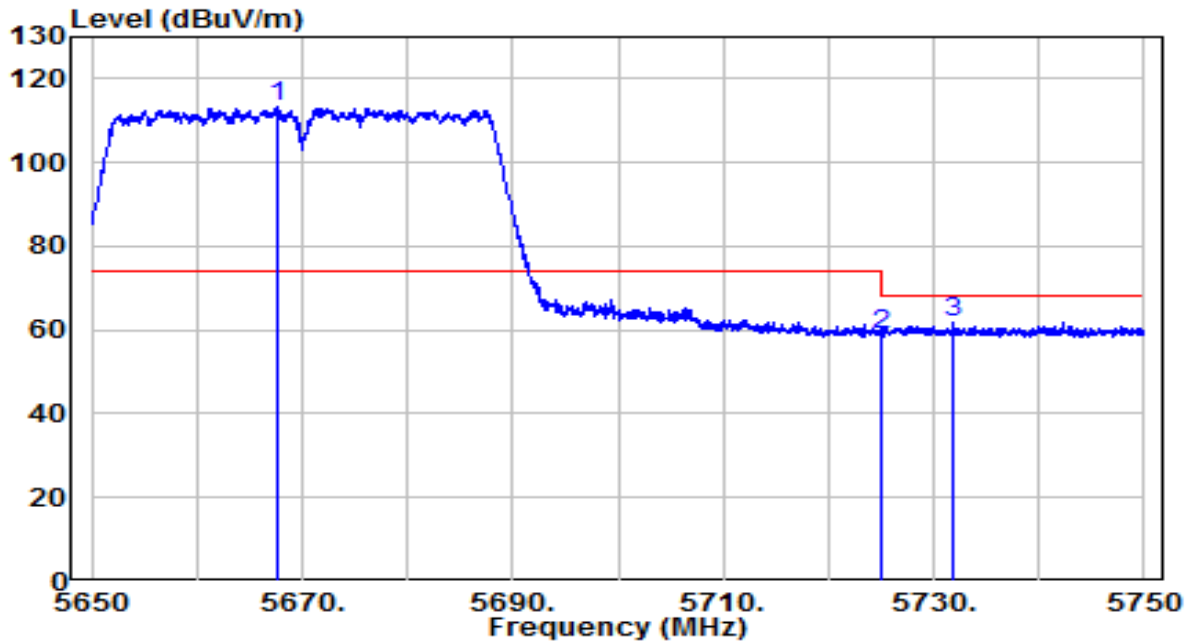


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5667.600	92.32	20.81	113.13	N/A	N/A	Peak
2		5725.000	38.06	21.00	59.06	-9.14	68.20	Peak
3		5731.950	40.77	21.02	61.79	-6.41	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6000 次世代 Wi-Fi 路由器	Date of Test	2021-06-26
Factor	BBHA 9120D	Temp. / Humidity	23.2°C/47.9%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT40 at Channel 5755MHz	Test Voltage	110V/60Hz

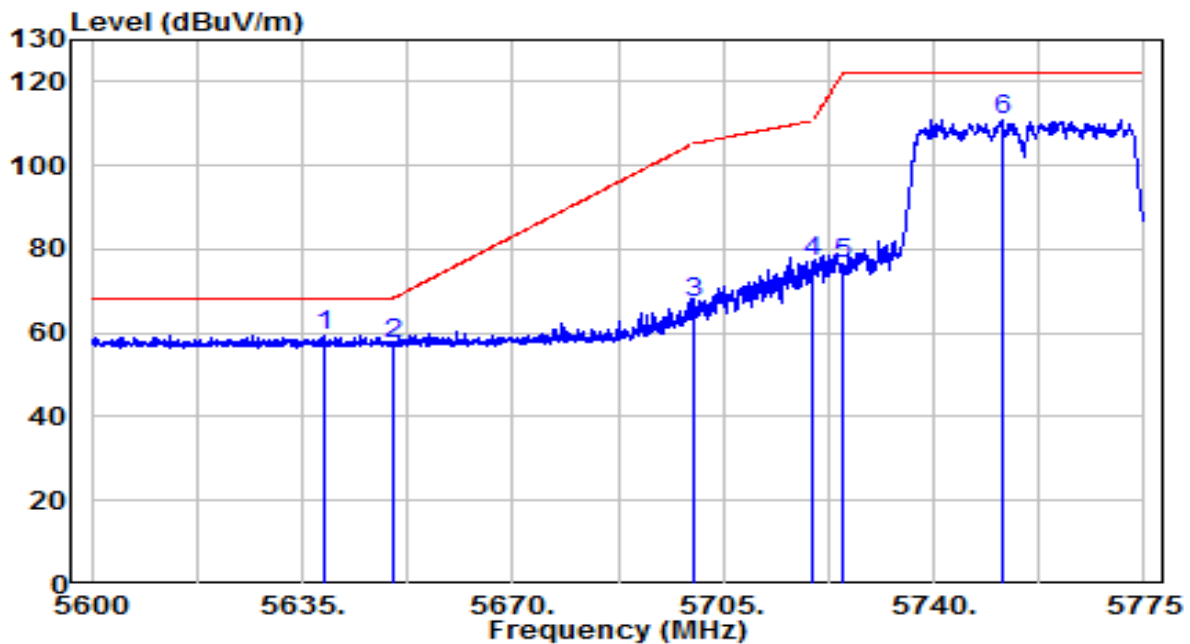


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5638.587	38.75	20.72	59.47	-8.73	68.20	Peak
2		5650.000	36.82	20.76	57.57	-10.63	68.20	Peak
3		5700.000	46.22	20.92	67.13	-38.07	105.20	Peak
4		5720.000	56.12	20.98	77.10	-33.70	110.80	Peak
5		5725.000	55.48	21.00	76.48	-45.72	122.20	Peak
6		5751.375	89.94	21.08	111.02	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6000 次世代 Wi-Fi 路由器	Date of Test	2021-06-26
Factor	BBHA 9120D	Temp. / Humidity	23.2°C/47.9%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT40 at Channel 5755MHz	Test Voltage	110V/60Hz

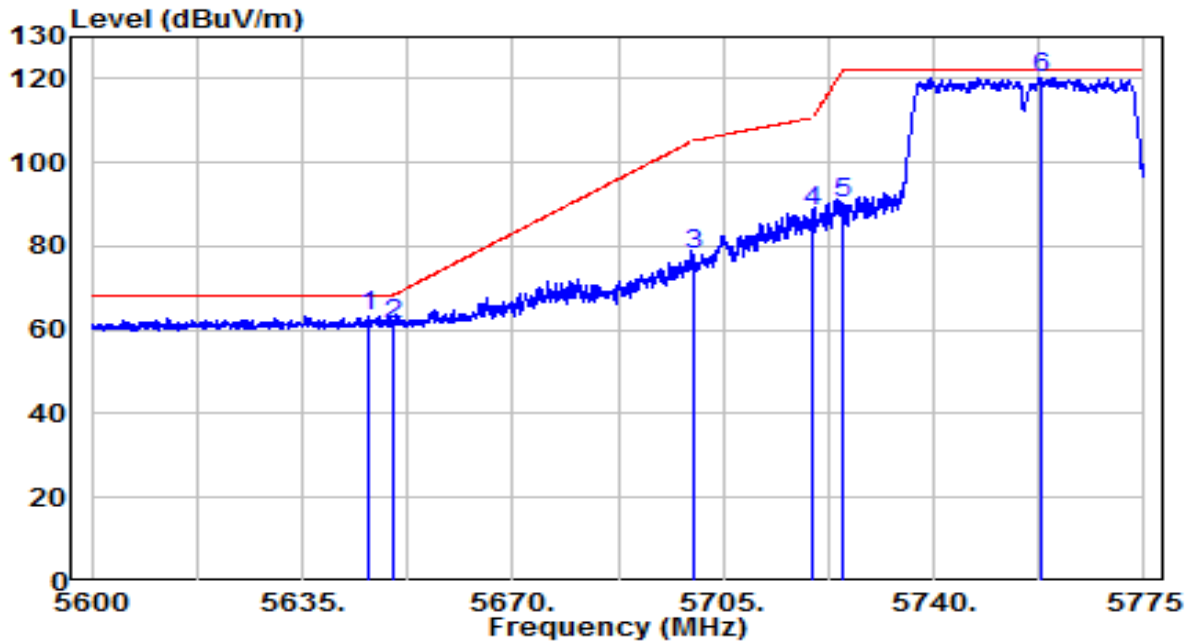


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5646.025	42.53	20.74	63.28	-4.92	68.20	Peak
2	5650.000	40.52	20.76	61.28	-6.92	68.20	Peak
3	5700.000	56.97	20.92	77.89	-27.31	105.20	Peak
4	5720.000	67.21	20.98	88.20	-22.60	110.80	Peak
5	5725.000	69.04	21.00	90.04	-32.16	122.20	Peak
6	* 5757.938	99.15	21.11	120.26	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6000 次世代 Wi-Fi 路由器	Date of Test	2021-06-26
Factor	BBHA 9120D	Temp. / Humidity	23.2°C/47.9%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT40 at Channel 5795MHz	Test Voltage	110V/60Hz

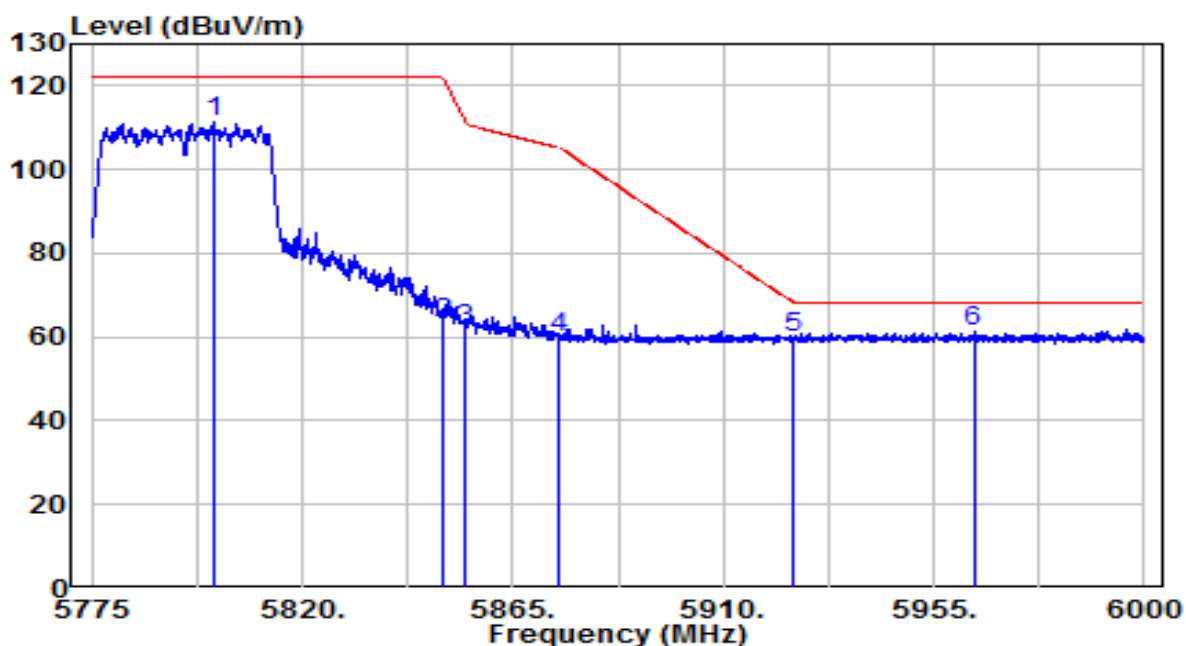


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5801.100	90.04	21.25	111.28	N/A	N/A	Peak
2	5850.000	41.90	21.40	63.30	-58.90	122.20	Peak
3	5855.000	40.35	21.42	61.77	-49.03	110.80	Peak
4	5875.000	38.44	21.49	59.92	-45.28	105.20	Peak
5	5925.000	38.26	21.65	59.91	-8.29	68.20	Peak
6	* 5963.550	39.78	21.77	61.55	-6.65	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6000 次世代 Wi-Fi 路由器	Date of Test	2021-06-26
Factor	BBHA 9120D	Temp. / Humidity	23.2°C/47.9%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT40 at Channel 5795MHz	Test Voltage	110V/60Hz

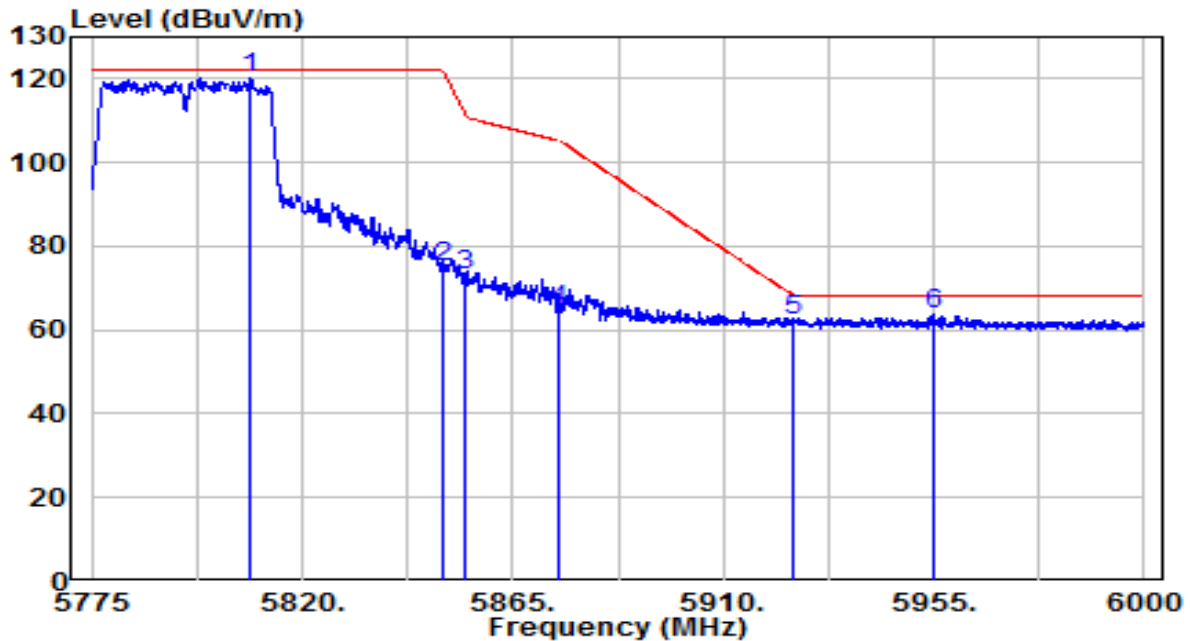


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5808.750	98.97	21.27	120.24	N/A	N/A	Peak
2		5850.000	53.53	21.40	74.93	-47.27	122.20	Peak
3		5855.000	51.49	21.42	72.91	-37.89	110.80	Peak
4		5875.000	43.37	21.49	64.85	-40.35	105.20	Peak
5		5925.000	40.42	21.65	62.07	-6.13	68.20	Peak
6		5955.225	41.96	21.74	63.70	-4.50	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6000 次世代 Wi-Fi 路由器	Date of Test	2021-06-26
Factor	BBHA 9120D	Temp. / Humidity	23.2°C/47.9%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT80 at Channel 5210MHz	Test Voltage	110V/60Hz

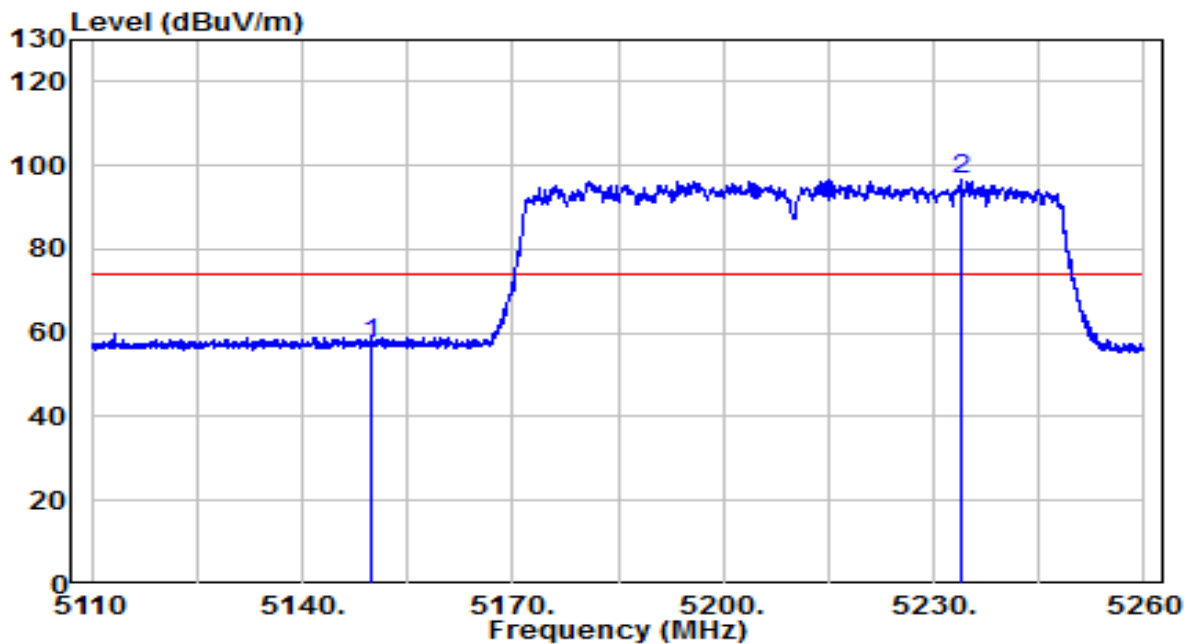


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5150.000	37.64	19.91	57.54	-16.46	74.00	Peak
2	* 5233.825	76.68	19.99	96.67	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6000 次世代 Wi-Fi 路由器	Date of Test	2021-06-26
Factor	BBHA 9120D	Temp. / Humidity	23.2°C/47.9%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT80 at Channel 5210MHz	Test Voltage	110V/60Hz

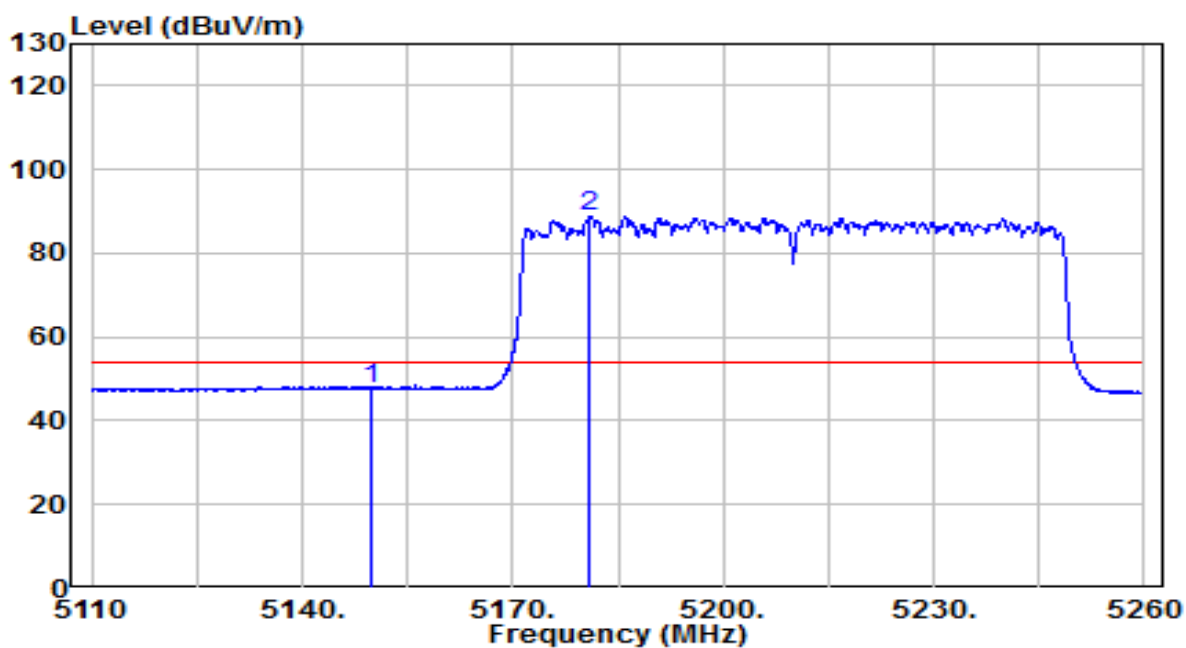


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5150.000	27.91	19.91	47.82	-6.18	54.00	Average
2	* 5181.025	68.86	19.94	88.80	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6000 次世代 Wi-Fi 路由器	Date of Test	2021-06-26
Factor	BBHA 9120D	Temp. / Humidity	23.2°C/47.9%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT80 at Channel 5210MHz	Test Voltage	110V/60Hz

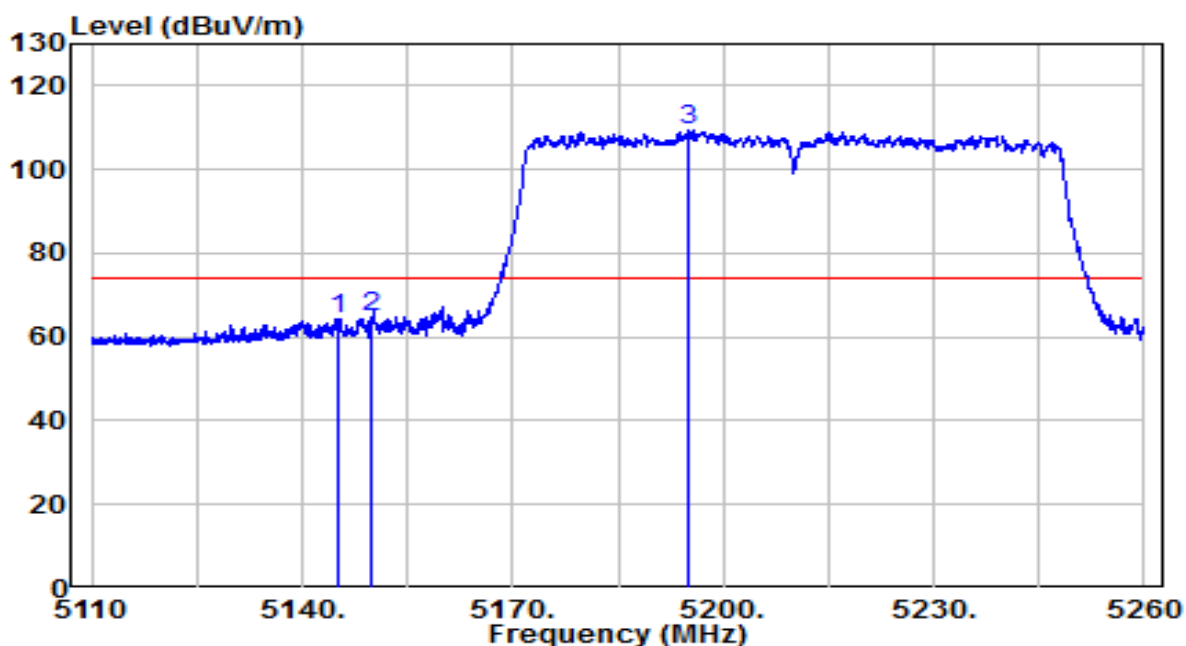


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5145.100	44.57	19.90	64.47	-9.53	74.00	Peak
2	5150.000	44.71	19.91	64.62	-9.38	74.00	Peak
3	* 5194.975	89.48	19.95	109.43	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6000 次世代 Wi-Fi 路由器	Date of Test	2021-06-26
Factor	BBHA 9120D	Temp. / Humidity	23.2°C/47.9%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT80 at Channel 5210MHz	Test Voltage	110V/60Hz

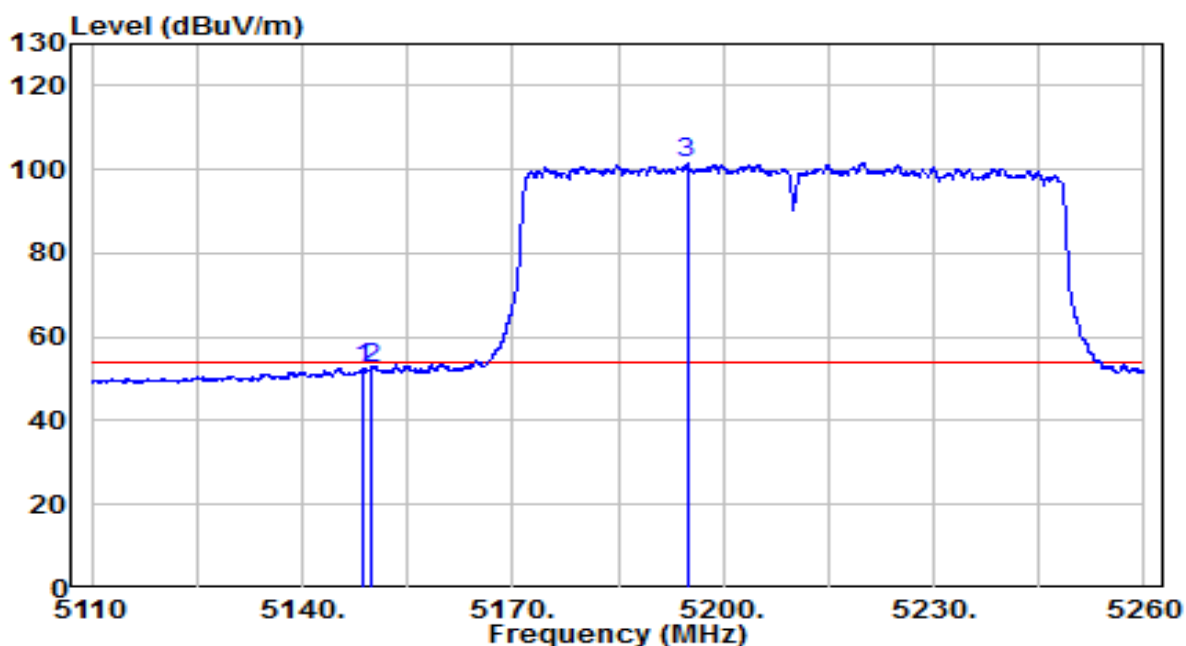


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5148.625	32.76	19.90	52.66	-1.34	54.00	Average
2	5150.000	32.64	19.91	52.55	-1.45	54.00	Average
3	* 5194.825	81.58	19.95	101.53	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6000 次世代 Wi-Fi 路由器	Date of Test	2021-06-26
Factor	BBHA 9120D	Temp. / Humidity	23.2°C/47.9%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT80 at Channel 5290MHz	Test Voltage	110V/60Hz

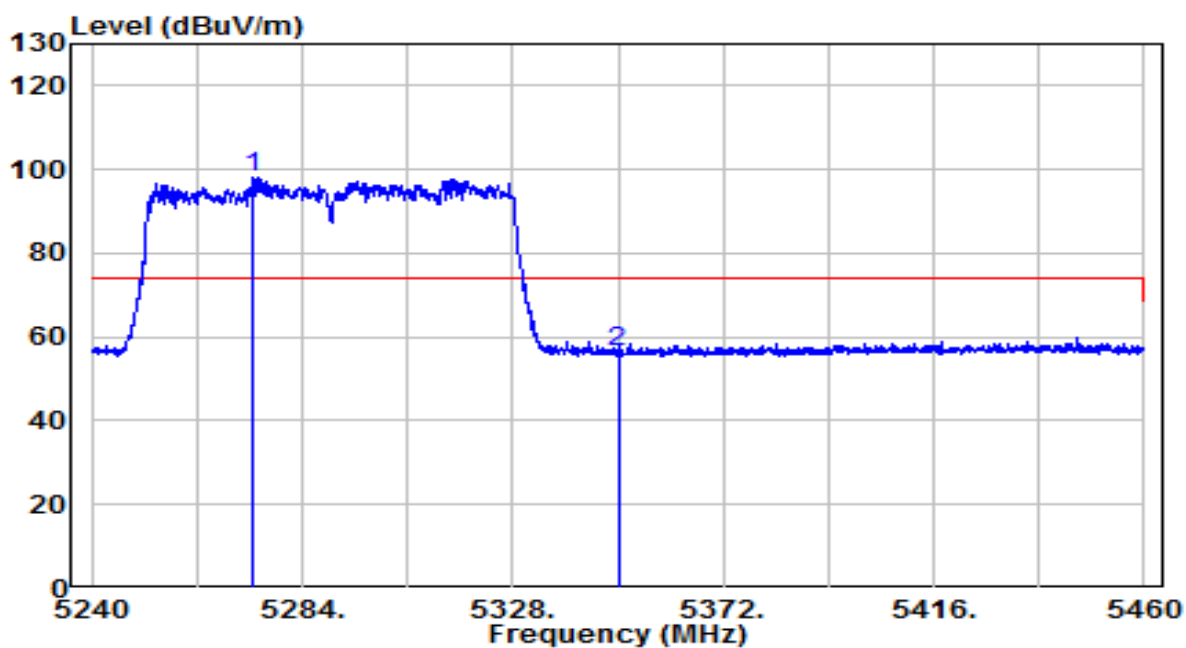


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5273.770	78.15	20.03	98.18	N/A	N/A	Peak
2		5350.000	36.34	20.11	56.46	-17.54	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6000 次世代 Wi-Fi 路由器	Date of Test	2021-06-26
Factor	BBHA 9120D	Temp. / Humidity	23.2°C/47.9%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT80 at Channel 5290MHz	Test Voltage	110V/60Hz

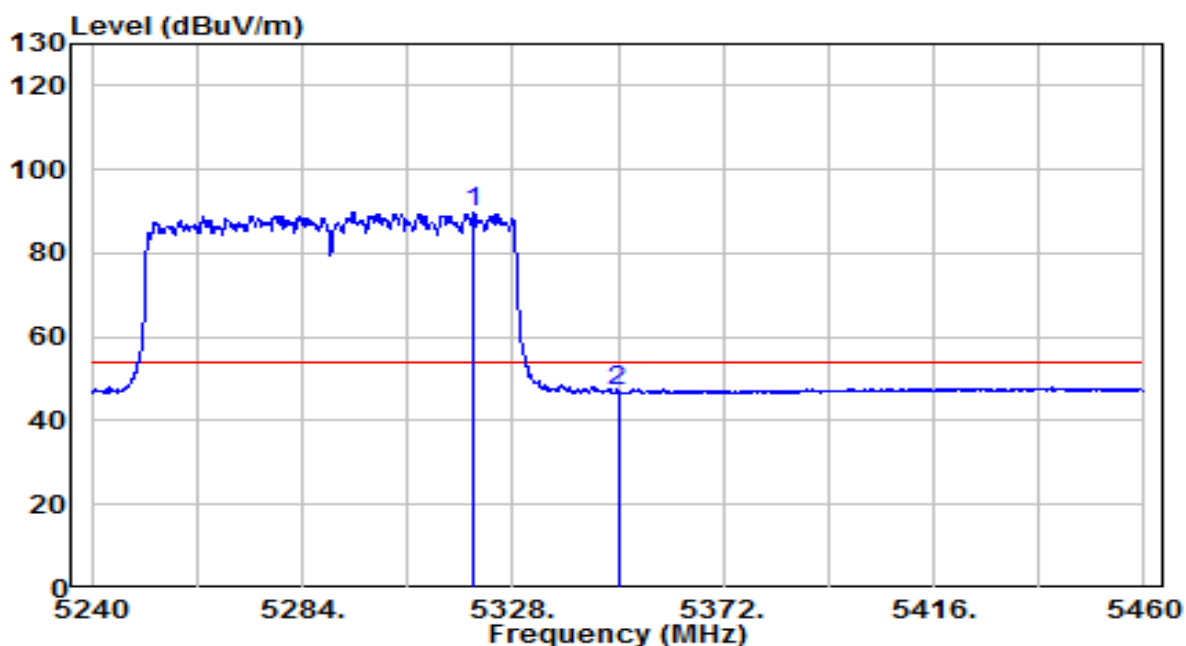


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5319.750	69.90	20.08	89.99	N/A	N/A	Average
2		5350.000	26.79	20.11	46.91	-7.09	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6000 次世代 Wi-Fi 路由器	Date of Test	2021-06-26
Factor	BBHA 9120D	Temp. / Humidity	23.2°C/47.9%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT80 at Channel 5290MHz	Test Voltage	110V/60Hz

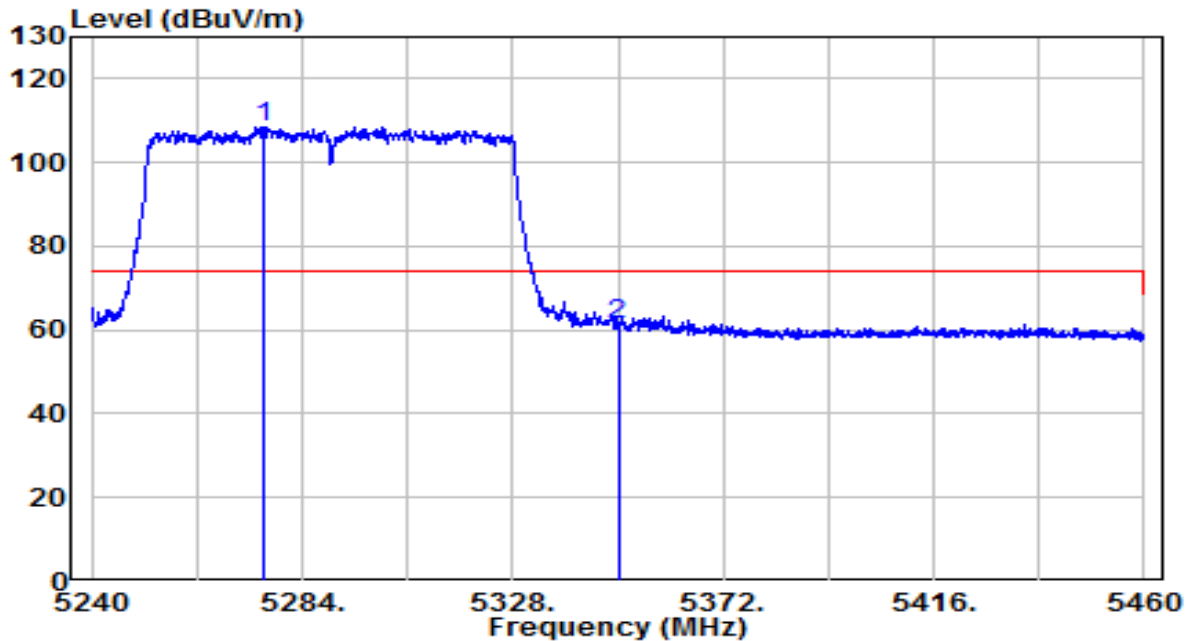


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5275.750	88.37	20.04	108.41	N/A	N/A	Peak
2		5350.000	41.35	20.11	61.46	-12.54	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6000 次世代 Wi-Fi 路由器	Date of Test	2021-06-26
Factor	BBHA 9120D	Temp. / Humidity	23.2°C/47.9%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT80 at Channel 5290MHz	Test Voltage	110V/60Hz

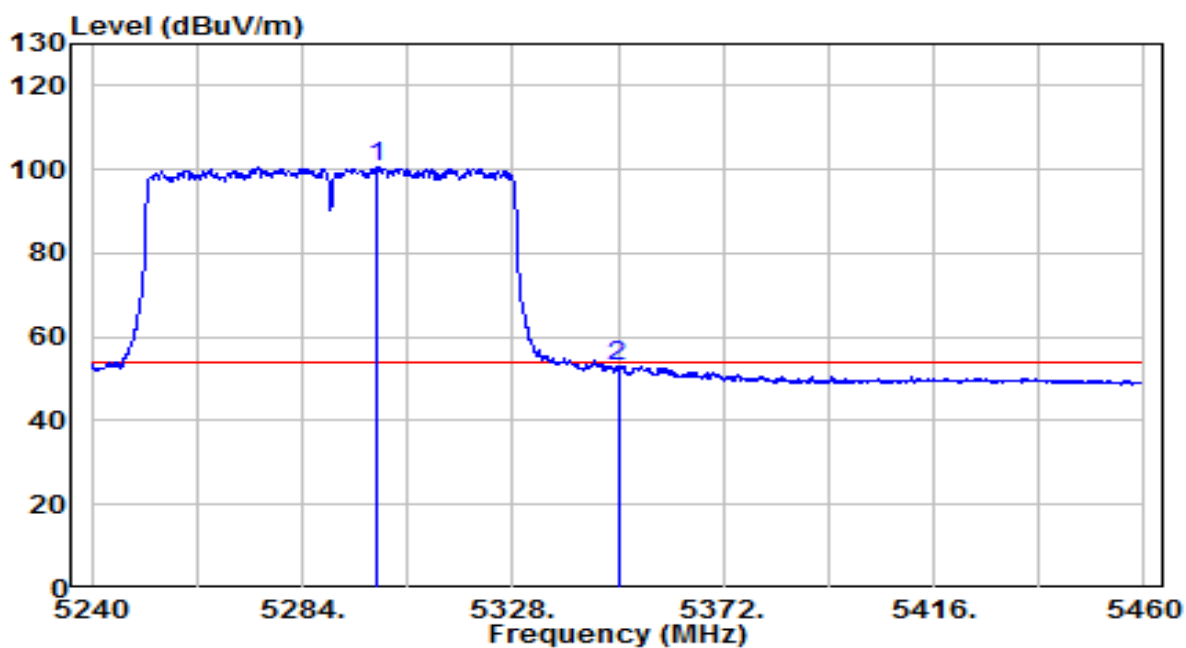


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5299.840	80.65	20.06	100.72	N/A	N/A	Average
2		5350.000	33.00	20.11	53.11	-0.89	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6000 次世代 Wi-Fi 路由器	Date of Test	2021-06-26
Factor	BBHA 9120D	Temp. / Humidity	23.2°C/47.9%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT80 at Channel 5530MHz	Test Voltage	110V/60Hz

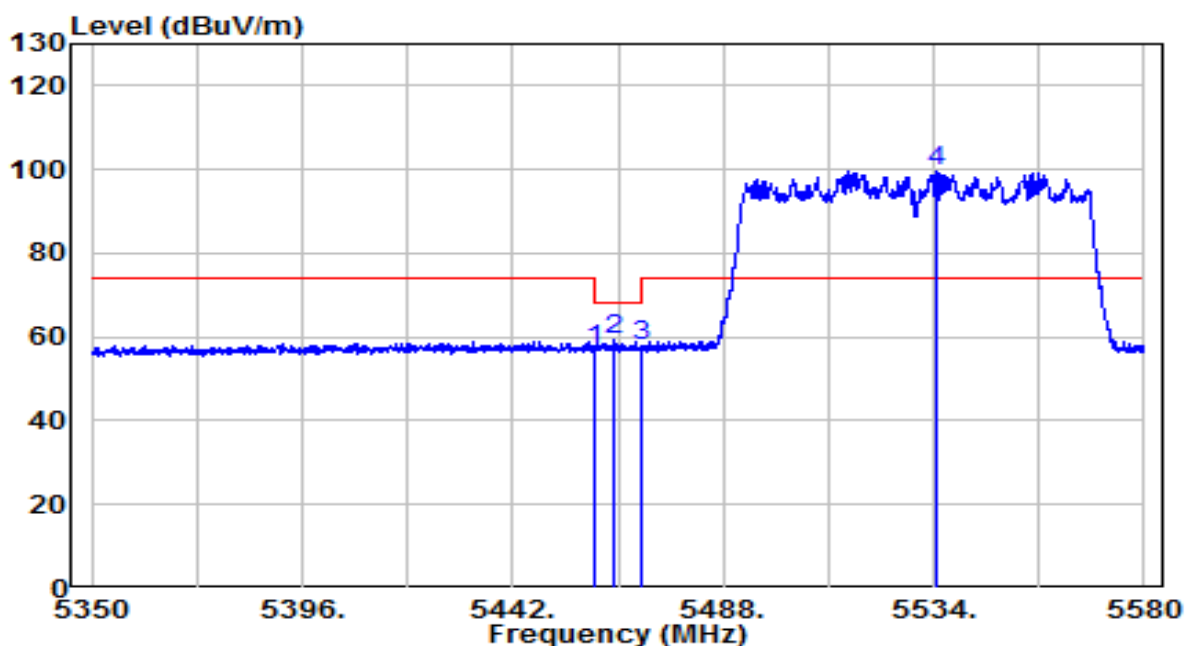


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5460.000	36.89	20.23	57.12	-11.08	68.20	Peak
2	5464.195	39.08	20.23	59.31	-8.89	68.20	Peak
3	5470.000	37.71	20.24	57.95	-10.25	68.20	Peak
4	* 5534.805	79.16	20.38	99.54	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6000 次世代 Wi-Fi 路由器	Date of Test	2021-06-26
Factor	BBHA 9120D	Temp. / Humidity	23.2°C/47.9%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT80 at Channel 5530MHz	Test Voltage	110V/60Hz

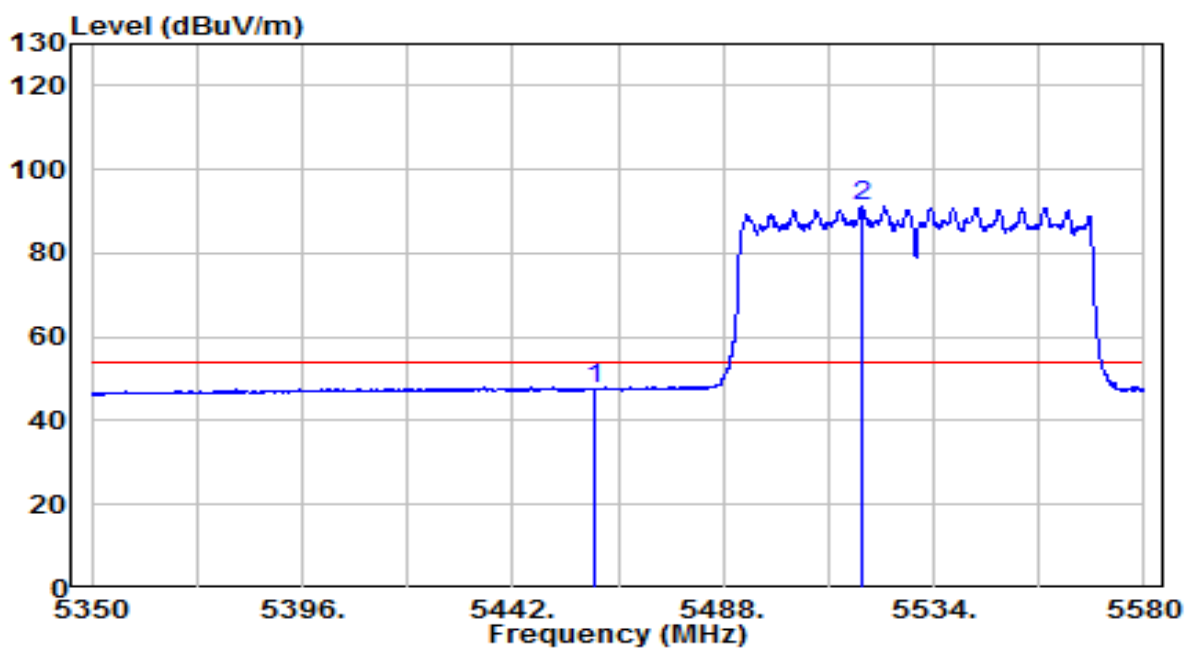


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	5460.000	27.26	20.23	47.48	-6.52	54.00	Average
2	* 5518.360	70.86	20.33	91.19	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6000 次世代 Wi-Fi 路由器	Date of Test	2021-06-26
Factor	BBHA 9120D	Temp. / Humidity	23.2°C/47.9%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT80 at Channel 5530MHz	Test Voltage	110V/60Hz

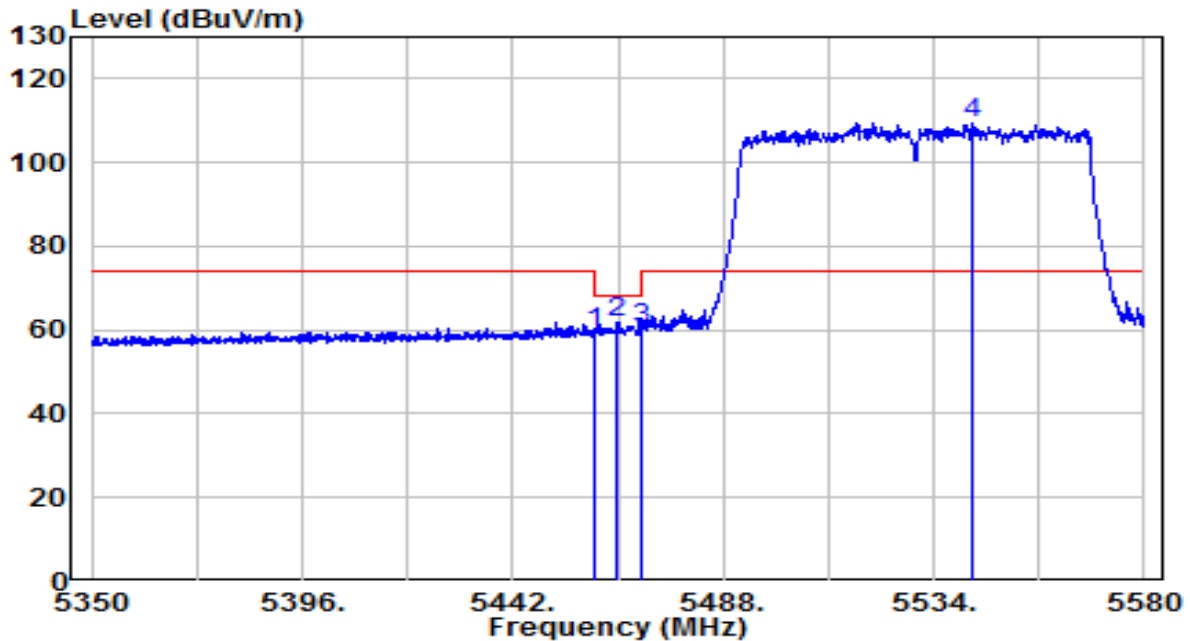


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5460.000	39.23	20.23	59.46	-8.74	68.20	Peak
2	5464.770	41.73	20.23	61.97	-6.23	68.20	Peak
3	5470.000	40.11	20.24	60.35	-7.85	68.20	Peak
4	* 5542.510	88.92	20.41	109.33	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6000 次世代 Wi-Fi 路由器	Date of Test	2021-06-26
Factor	BBHA 9120D	Temp. / Humidity	23.2°C/47.9%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT80 at Channel 5530MHz	Test Voltage	110V/60Hz

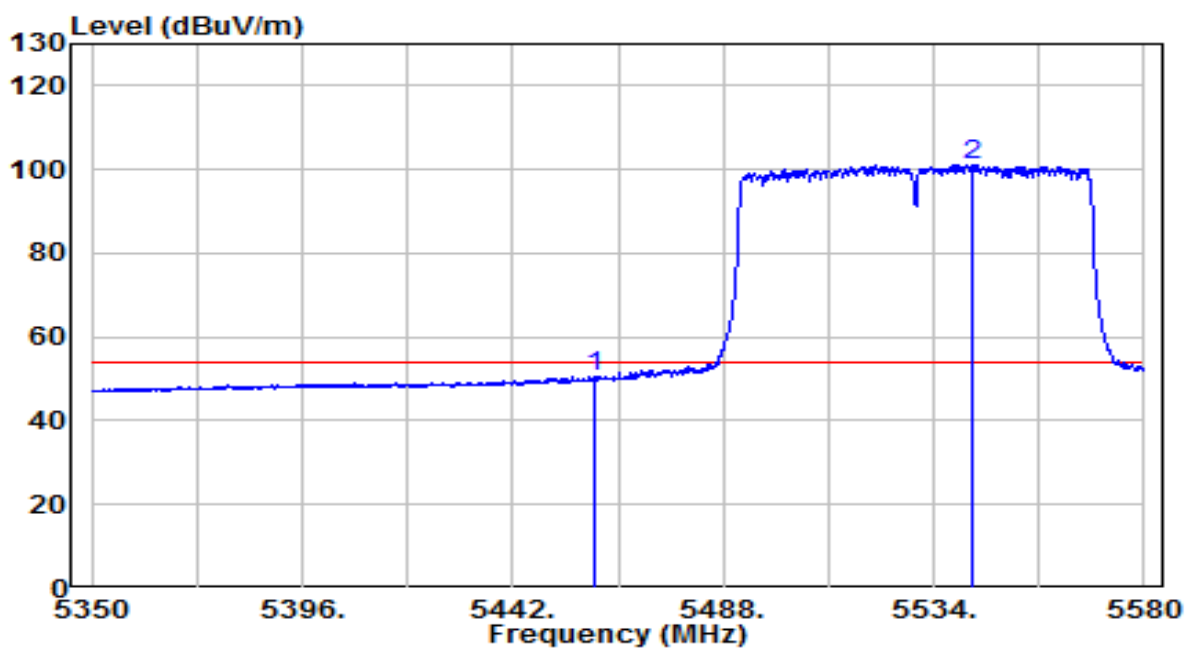


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5460.000	30.22	20.23	50.45	-3.55	54.00	Average
2	* 5542.395	80.72	20.41	101.12	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6000 次世代 Wi-Fi 路由器	Date of Test	2021-06-26
Factor	BBHA 9120D	Temp. / Humidity	23.2°C/47.9%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT80 at Channel 5610MHz	Test Voltage	110V/60Hz

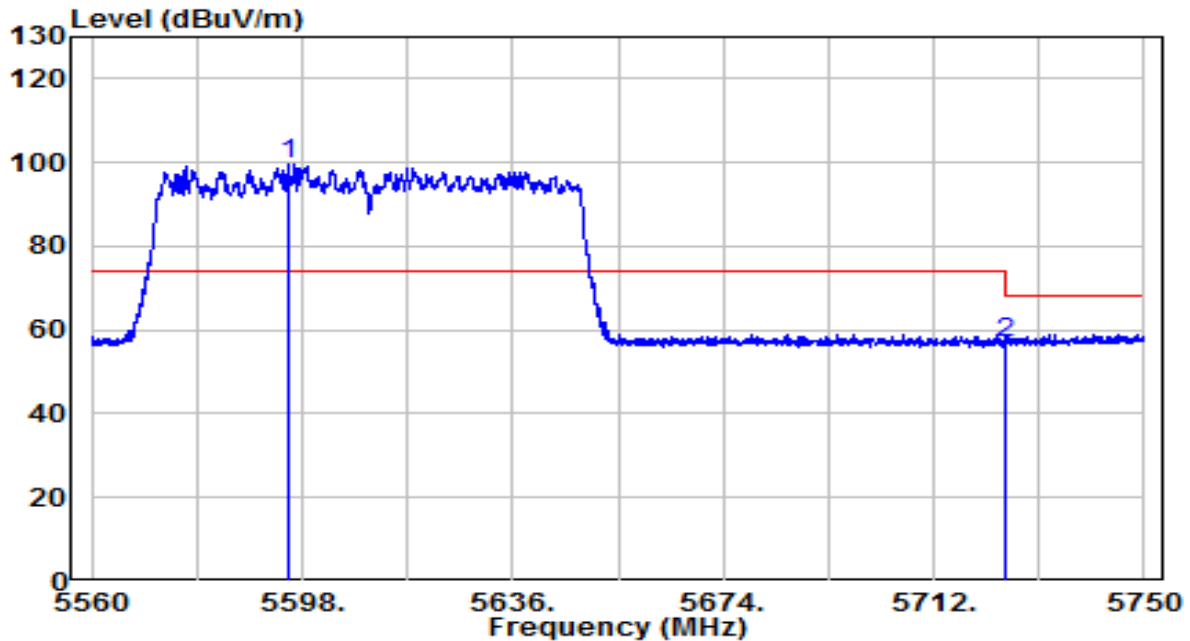


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5595.530	78.84	20.58	99.42	N/A	N/A	Peak
2		5725.000	36.09	21.00	57.09	-11.11	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6000 次世代 Wi-Fi 路由器	Date of Test	2021-06-26
Factor	BBHA 9120D	Temp. / Humidity	23.2°C/47.9%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT80 at Channel 5610MHz	Test Voltage	110V/60Hz

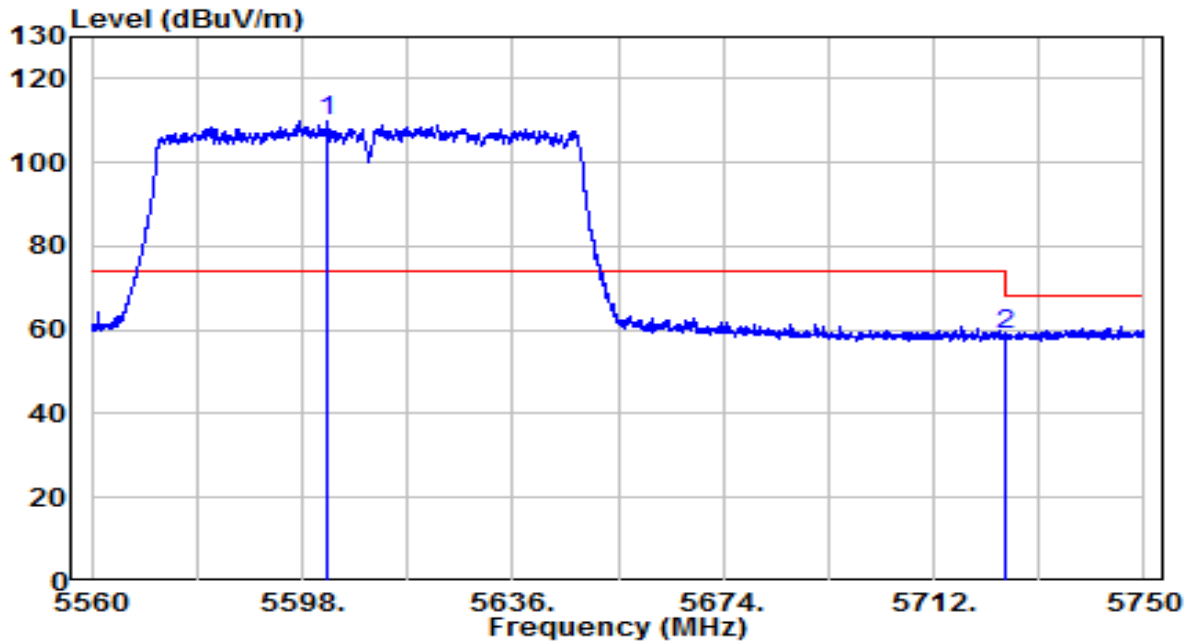


No		Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	*	5602.560	89.26	20.60	109.86	N/A	N/A	Peak
2		5725.000	37.80	21.00	58.80	-9.40	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6000 次世代 Wi-Fi 路由器	Date of Test	2021-06-26
Factor	BBHA 9120D	Temp. / Humidity	23.2°C/47.9%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT80 at Channel 5775MHz	Test Voltage	110V/60Hz

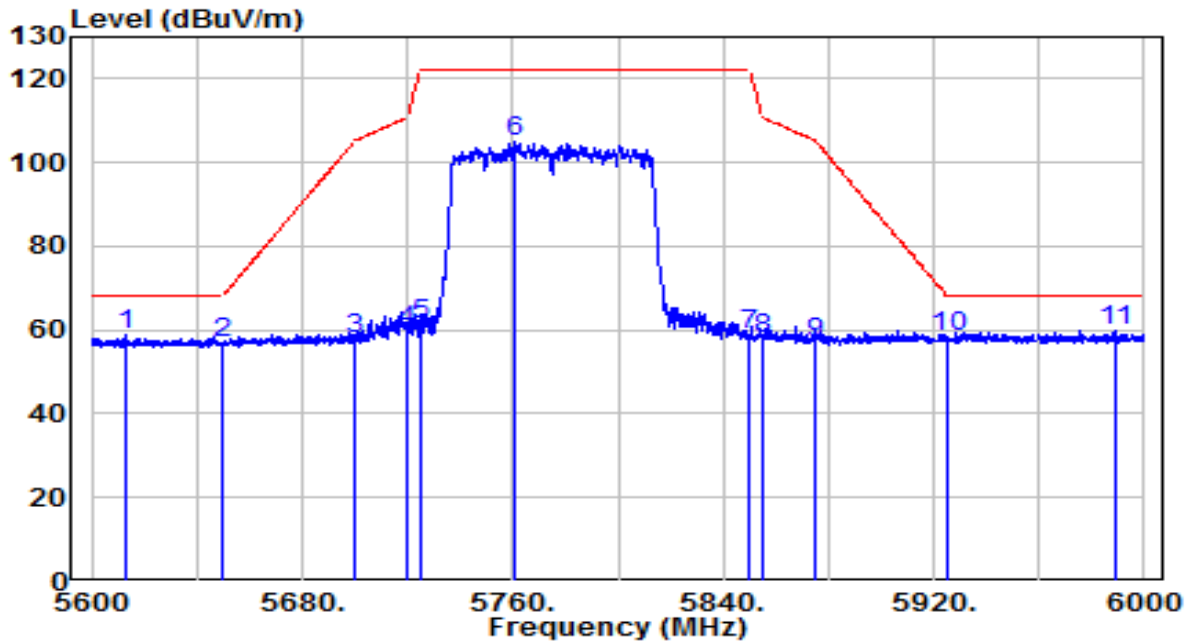


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5612.800	38.23	20.64	58.86	-9.34	68.20	Peak
2	5650.000	36.23	20.76	56.99	-11.21	68.20	Peak
3	5700.000	36.93	20.92	57.84	-47.36	105.20	Peak
4	5720.000	38.91	20.98	59.90	-50.90	110.80	Peak
5	5725.000	40.45	21.00	61.45	-60.75	122.20	Peak
6	5761.200	83.62	21.12	104.74	N/A	N/A	Peak
7	5850.000	37.38	21.40	58.78	-63.42	122.20	Peak
8	5855.000	36.33	21.42	57.75	-53.05	110.80	Peak
9	5875.000	35.65	21.49	57.13	-48.07	105.20	Peak
10	5925.000	36.57	21.65	58.22	-9.98	68.20	Peak
11	* 5988.800	38.16	21.85	60.01	-8.19	68.20	Peak

Note:

1. " *", means this data is the worst emission level.

2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6000 次世代 Wi-Fi 路由器	Date of Test	2021-06-26
Factor	BBHA 9120D	Temp. / Humidity	23.2°C/47.9%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT80 at Channel 5775MHz	Test Voltage	110V/60Hz

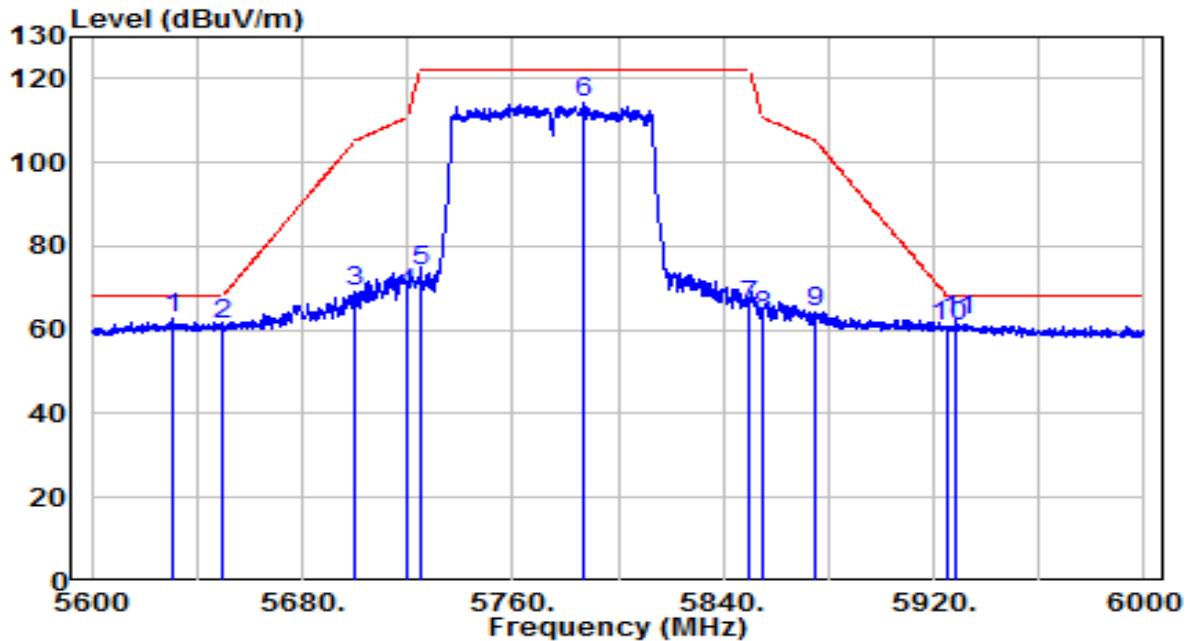


No		Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	*	5630.400	42.26	20.69	62.96	-5.24	68.20	Peak
2		5650.000	40.54	20.76	61.30	-6.90	68.20	Peak
3		5700.000	48.03	20.92	68.95	-36.25	105.20	Peak
4		5720.000	47.57	20.98	68.55	-42.25	110.80	Peak
5		5725.000	53.17	21.00	74.17	-48.03	122.20	Peak
6		5787.400	93.03	21.20	114.23	N/A	N/A	Peak
7		5850.000	44.48	21.40	65.88	-56.32	122.20	Peak
8		5855.000	41.91	21.42	63.33	-47.47	110.80	Peak
9		5875.000	42.55	21.49	64.04	-41.16	105.20	Peak
10		5925.000	39.36	21.65	61.01	-7.19	68.20	Peak
11		5928.600	40.84	21.66	62.50	-5.70	68.20	Peak

Note:

1. " *", means this data is the worst emission level.

2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6000 次世代 Wi-Fi 路由器	Date of Test	2021-06-26
Factor	BBHA 9120D	Temp. / Humidity	23.2°C/47.9%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT160 at Channel 5250MHz	Test Voltage	110V/60Hz

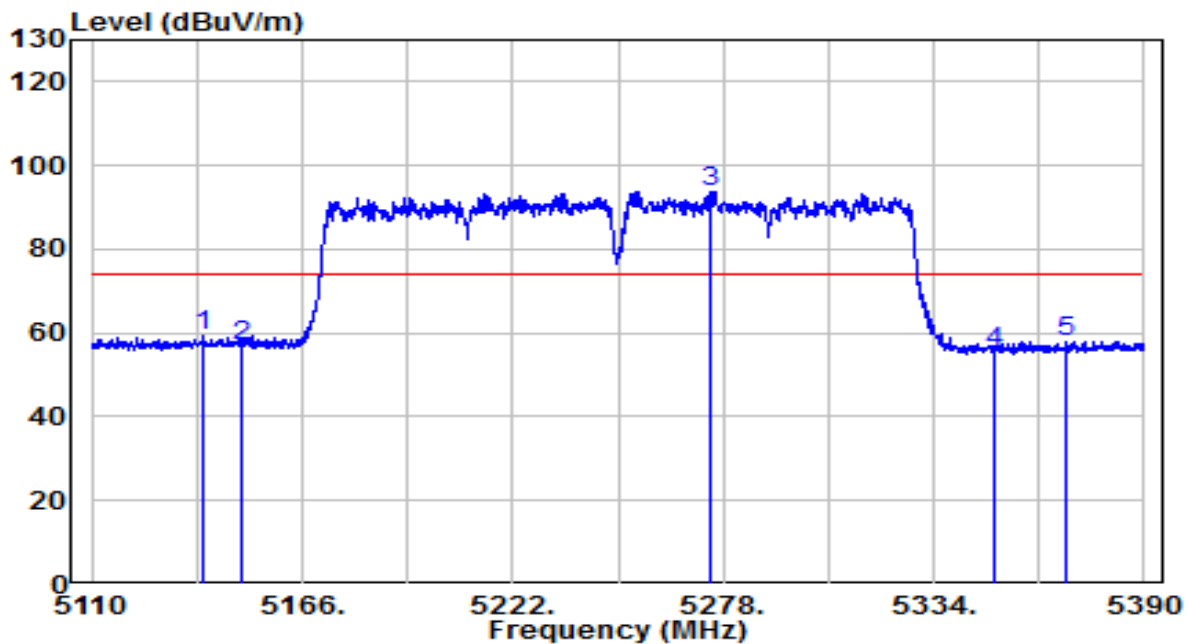


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5139.680	39.60	19.90	59.50	-14.50	74.00	Peak
2	5150.000	37.11	19.91	57.01	-16.99	74.00	Peak
3	* 5274.640	73.68	20.04	93.71	N/A	N/A	Peak
4	5350.000	35.37	20.11	55.49	-18.51	74.00	Peak
5	5369.000	37.89	20.13	58.02	-15.98	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6000 次世代 Wi-Fi 路由器	Date of Test	2021-06-26
Factor	BBHA 9120D	Temp. / Humidity	23.2°C/47.9%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT160 at Channel 5250MHz	Test Voltage	110V/60Hz

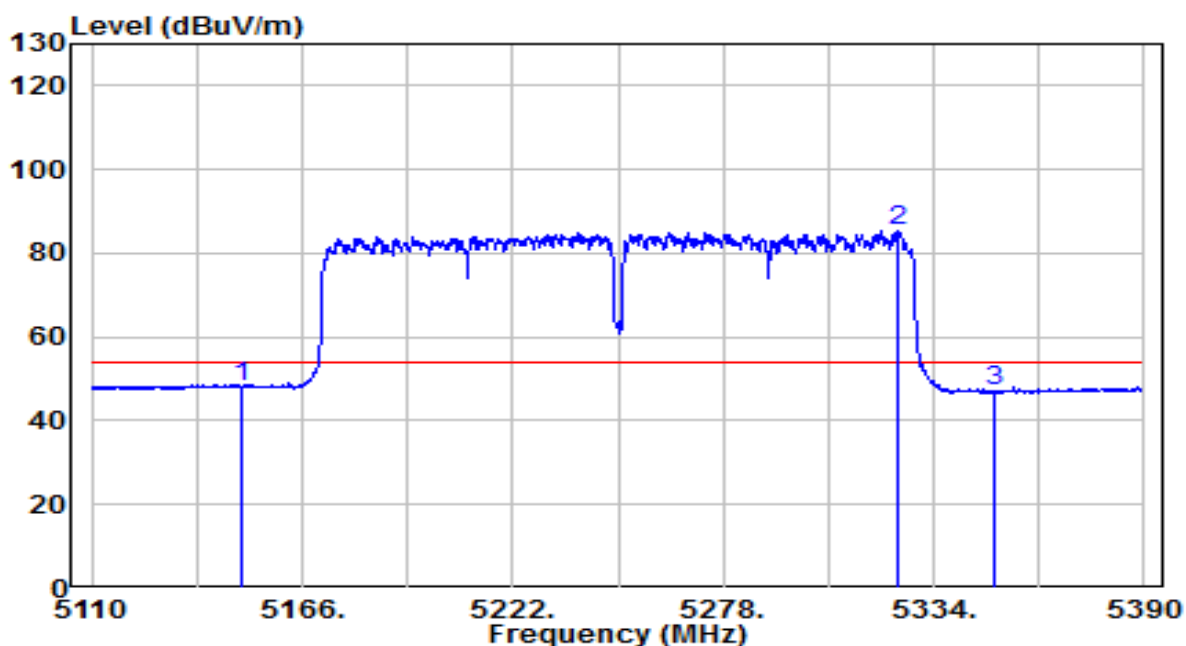


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5150.000	28.12	19.91	48.03	-5.97	54.00	Average
2	* 5324.760	65.22	20.09	85.31	N/A	N/A	Average
3	5350.000	26.94	20.11	47.05	-6.95	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6000 次世代 Wi-Fi 路由器	Date of Test	2021-06-26
Factor	BBHA 9120D	Temp. / Humidity	23.2°C/47.9%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT160 at Channel 5250MHz	Test Voltage	110V/60Hz

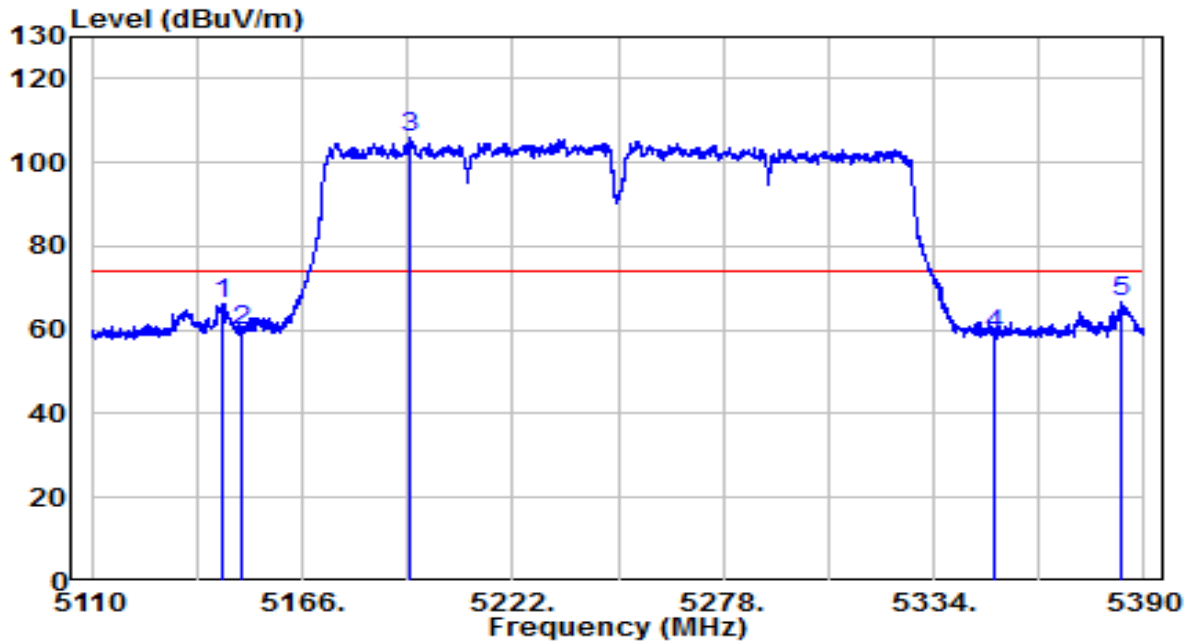


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5144.440	46.55	19.90	66.45	-7.55	74.00	Peak
2	5150.000	39.82	19.91	59.73	-14.27	74.00	Peak
3	* 5194.840	85.96	19.95	105.91	N/A	N/A	Peak
4	5350.000	38.77	20.11	58.88	-15.12	74.00	Peak
5	5384.120	46.74	20.15	66.89	-7.11	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6000 次世代 Wi-Fi 路由器	Date of Test	2021-06-26
Factor	BBHA 9120D	Temp. / Humidity	23.2°C/47.9%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT160 at Channel 5250MHz	Test Voltage	110V/60Hz

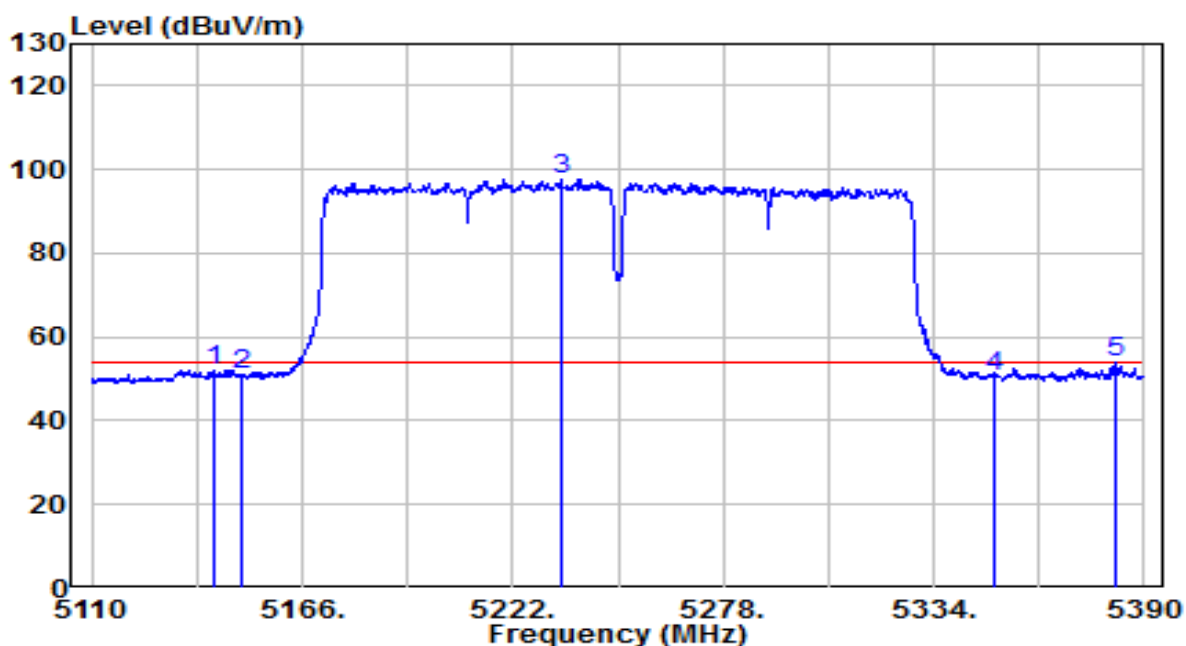


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5142.480	32.10	19.90	51.99	-2.01	54.00	Average
2	5150.040	30.88	19.91	50.78	-3.22	54.00	Average
3	* 5234.880	77.65	19.99	97.65	N/A	N/A	Average
4	5350.000	30.44	20.11	50.55	-3.45	54.00	Average
5	5382.580	33.62	20.15	53.77	-0.23	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6000 次世代 Wi-Fi 路由器	Date of Test	2021-06-26
Factor	BBHA 9120D	Temp. / Humidity	23.2°C/47.9%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT160 at Channel 5570MHz	Test Voltage	110V/60Hz

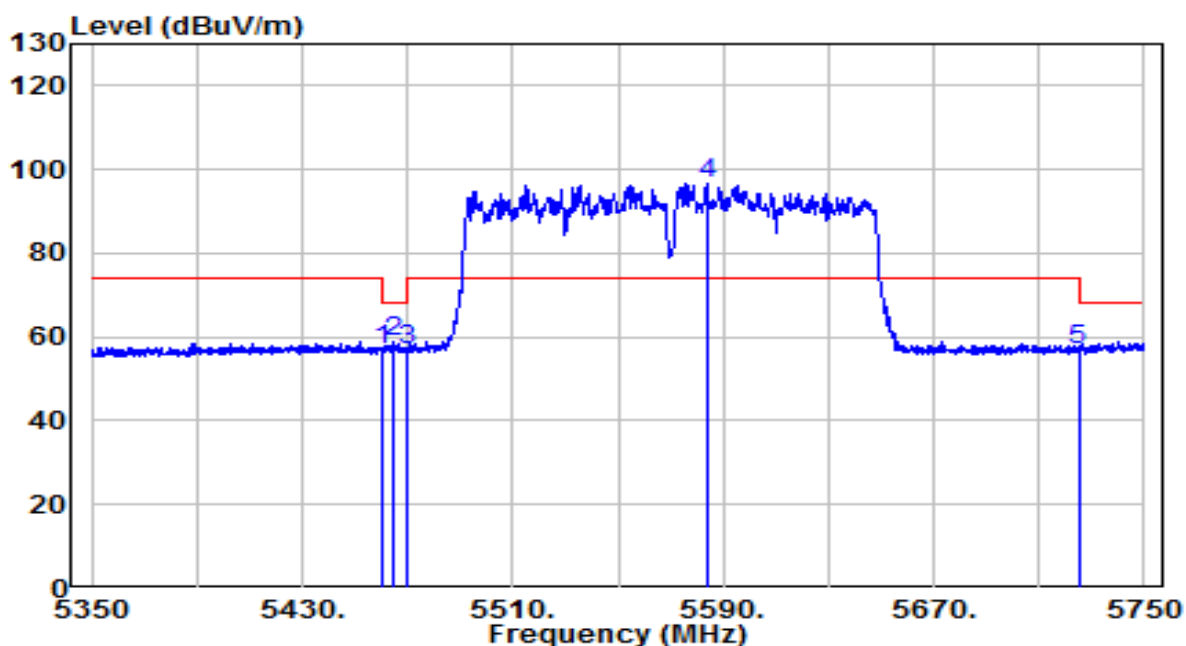


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5460.000	36.76	20.23	56.99	-11.21	68.20	Peak
2	5464.400	38.49	20.23	58.72	-9.48	68.20	Peak
3	5470.000	36.66	20.24	56.90	-11.30	68.20	Peak
4	* 5583.800	75.96	20.54	96.51	N/A	N/A	Peak
5	5725.000	35.88	21.00	56.88	-11.32	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6000 次世代 Wi-Fi 路由器	Date of Test	2021-06-26
Factor	BBHA 9120D	Temp. / Humidity	23.2°C/47.9%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT160 at Channel 5570MHz	Test Voltage	110V/60Hz

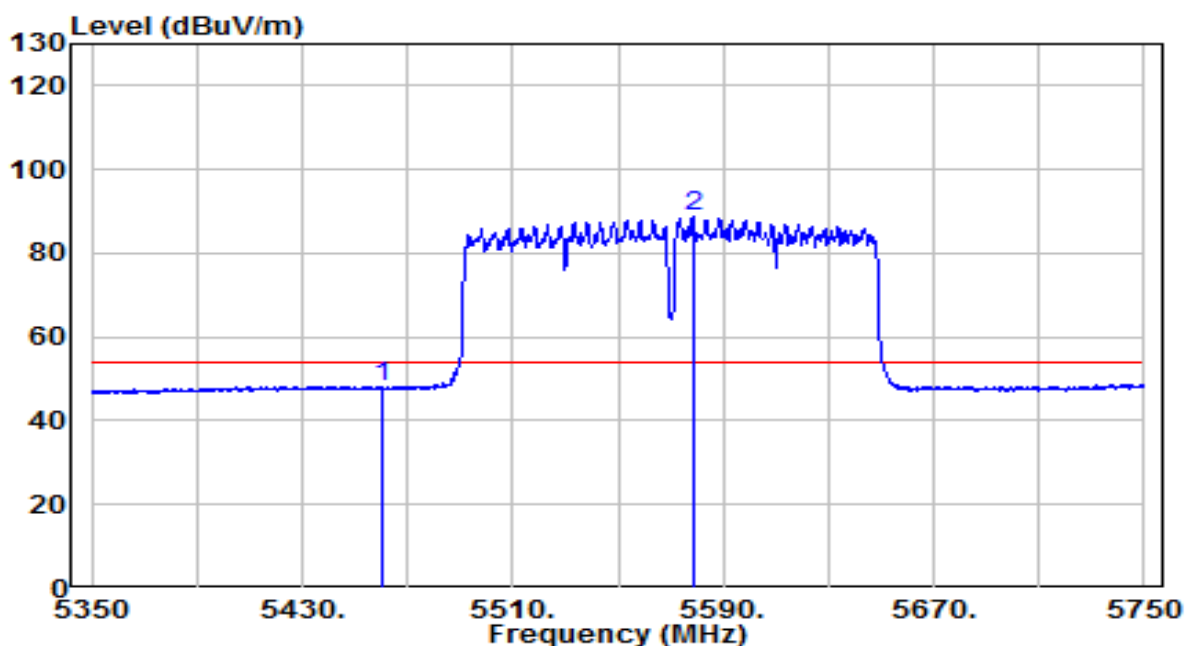


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5460.000	27.65	20.23	47.88	-6.12	54.00	Average
2	* 5578.400	68.03	20.52	88.55	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6000 次世代 Wi-Fi 路由器	Date of Test	2021-06-26
Factor	BBHA 9120D	Temp. / Humidity	23.2°C/47.9%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT160 at Channel 5570MHz	Test Voltage	110V/60Hz

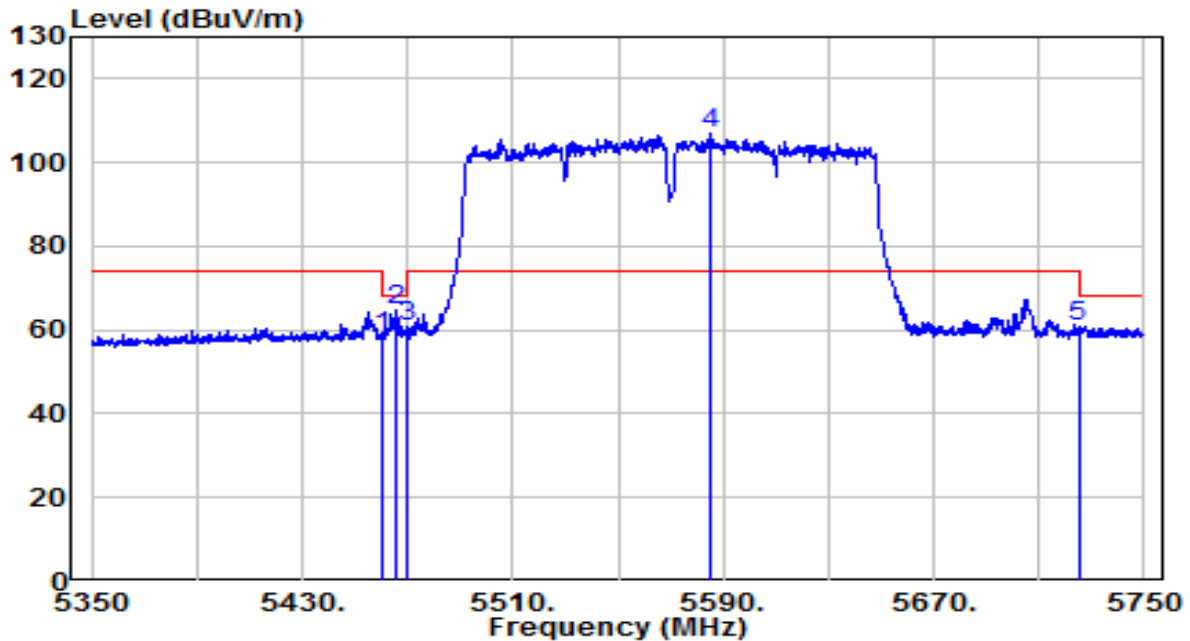


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5460.000	37.99	20.23	58.22	-9.98	68.20	Peak
2	5465.400	44.51	20.23	64.74	-3.46	68.20	Peak
3	5470.000	40.72	20.24	60.96	-7.24	68.20	Peak
4	* 5585.200	86.16	20.55	106.71	N/A	N/A	Peak
5	5725.000	39.61	21.00	60.60	-7.60	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6000 次世代 Wi-Fi 路由器	Date of Test	2021-06-26
Factor	BBHA 9120D	Temp. / Humidity	23.2°C/47.9%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT160 at Channel 5570MHz	Test Voltage	110V/60Hz

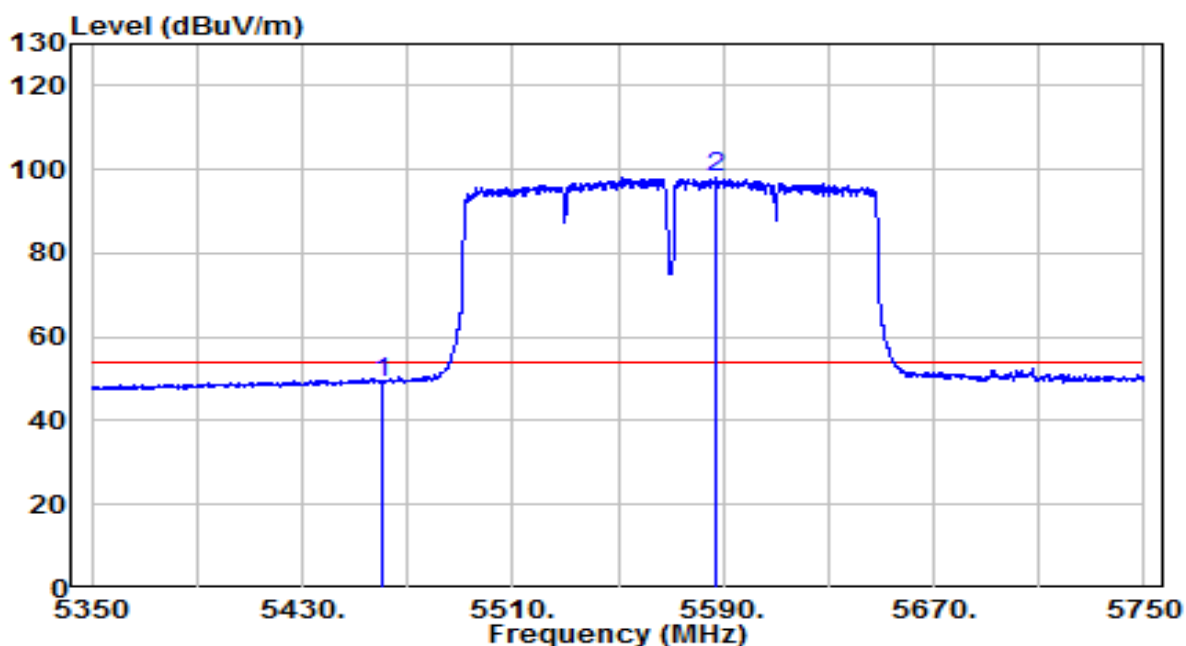


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5460.000	29.07	20.23	49.30	-4.70	54.00	Average
2	* 5587.400	77.37	20.55	97.92	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6000 次世代 Wi-Fi 路由器	Date of Test	2021-06-26
Factor	BBHA 9120D	Temp. / Humidity	23.2°C/47.9%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE20 at Channel 5180MHz	Test Voltage	110V/60Hz

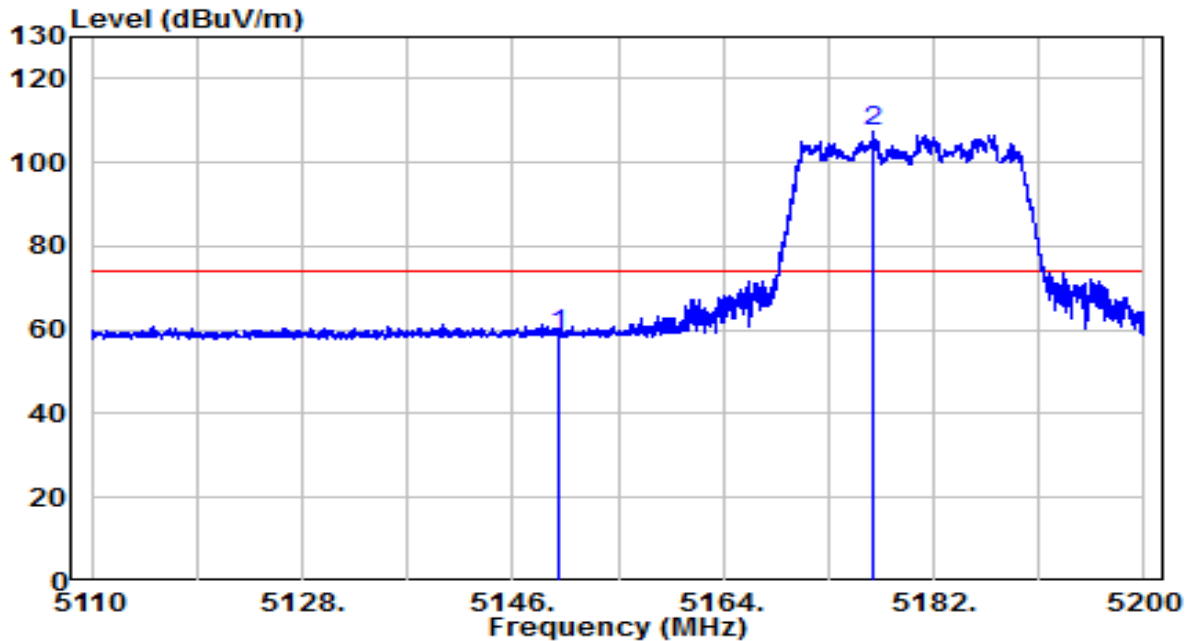


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5150.000	38.80	19.91	58.70	-15.30	74.00	Peak
2	* 5176.870	87.58	19.93	107.52	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preampfier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6000 次世代 Wi-Fi 路由器	Date of Test	2021-06-26
Factor	BBHA 9120D	Temp. / Humidity	23.2°C/47.9%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE20 at Channel 5180MHz	Test Voltage	110V/60Hz

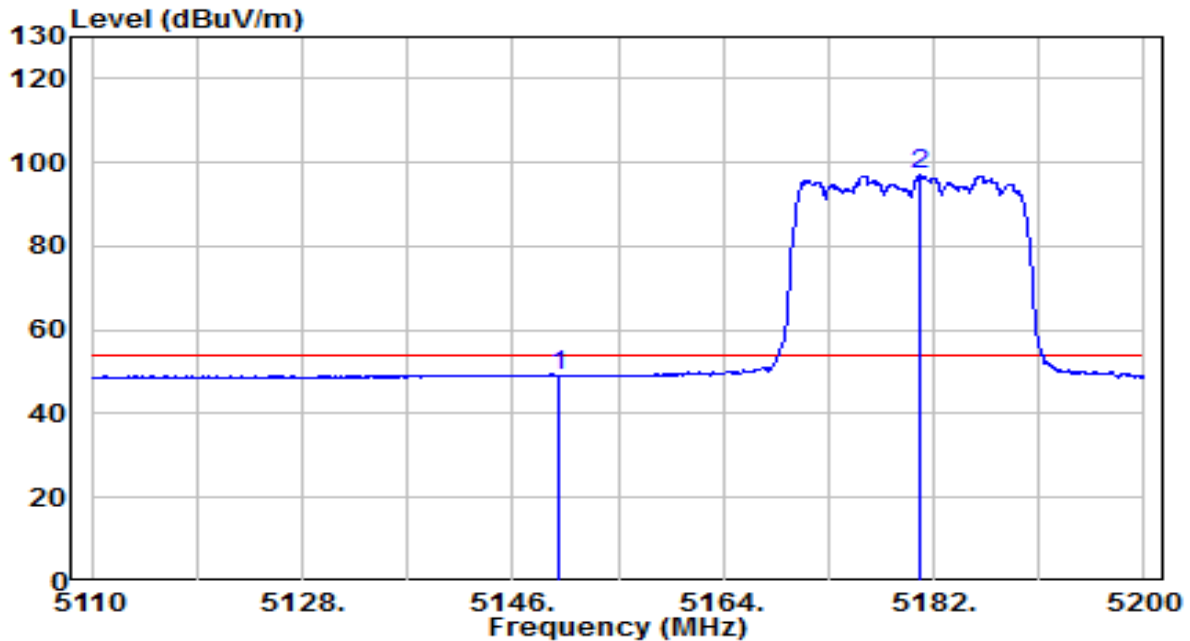


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5150.000	29.13	19.91	49.03	-4.97	54.00	Average
2	* 5180.830	77.03	19.94	96.97	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6000 次世代 Wi-Fi 路由器	Date of Test	2021-06-26
Factor	BBHA 9120D	Temp. / Humidity	23.2°C/47.9%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE20 at Channel 5180MHz	Test Voltage	110V/60Hz

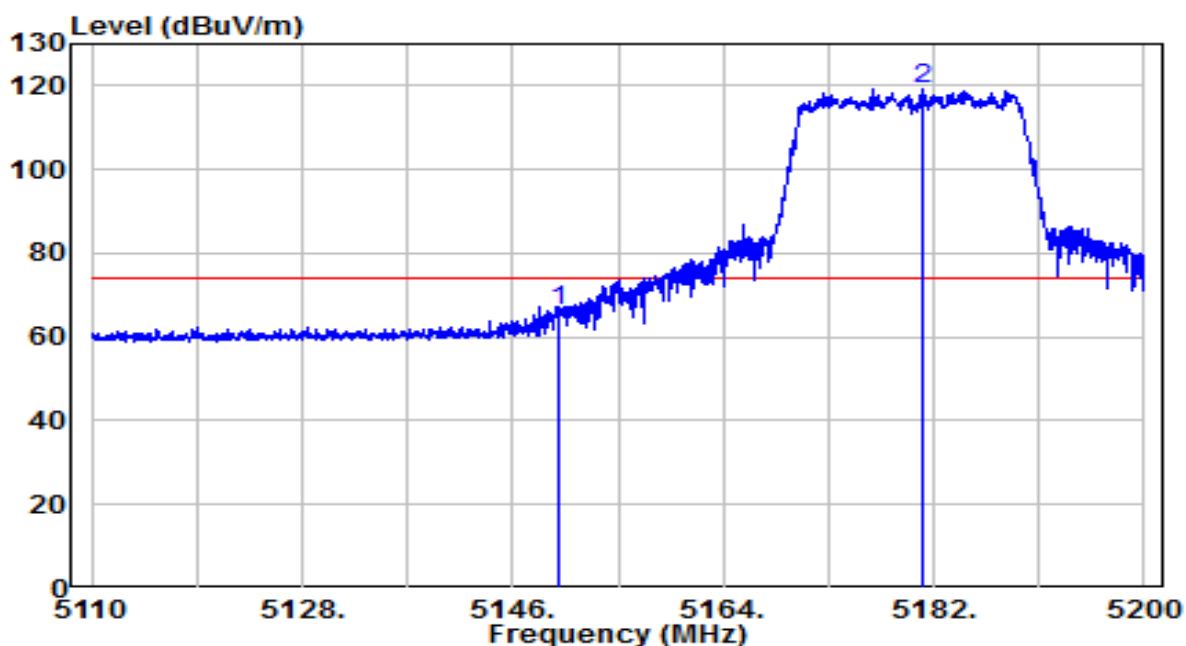


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5150.000	46.31	19.91	66.22	-7.78	74.00	Peak
2	* 5181.010	99.47	19.94	119.41	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6000 次世代 Wi-Fi 路由器	Date of Test	2021-06-26
Factor	BBHA 9120D	Temp. / Humidity	23.2°C/47.9%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE20 at Channel 5180MHz	Test Voltage	110V/60Hz

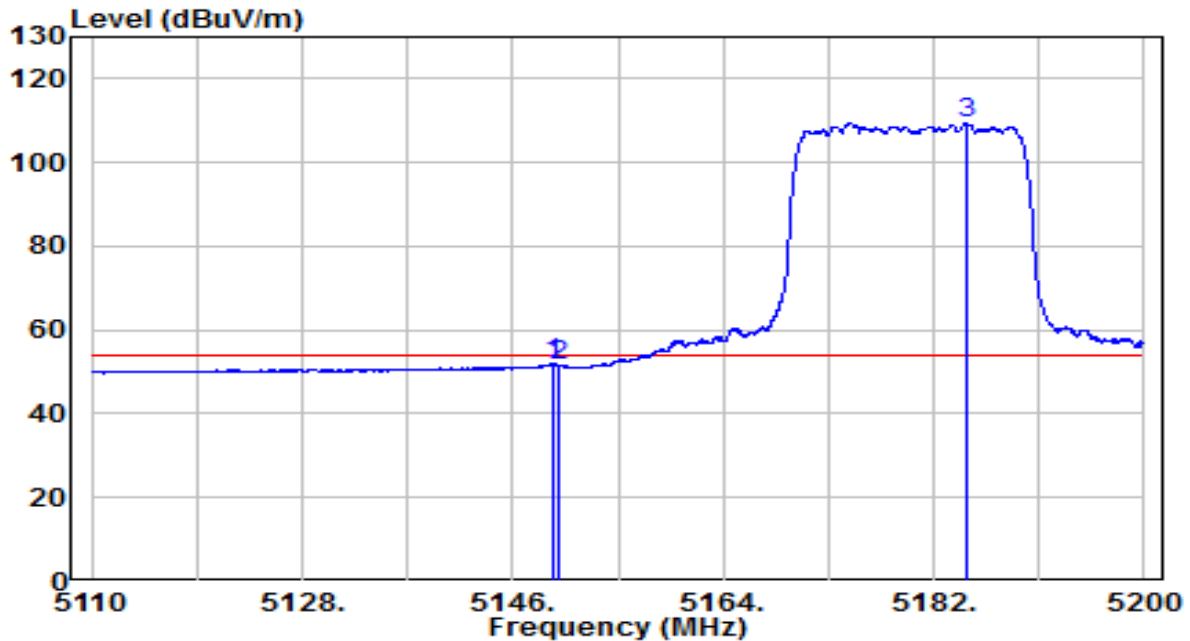


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5149.555	32.30	19.91	52.21	-1.79	54.00	Average
2	5150.000	31.39	19.91	51.30	-2.70	54.00	Average
3	* 5184.745	89.42	19.94	109.36	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6000 次世代 Wi-Fi 路由器	Date of Test	2021-06-27
Factor	BBHA 9120D	Temp. / Humidity	24.4°C/37%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE20 at Channel 5320MHz	Test Voltage	AC 110V/60Hz

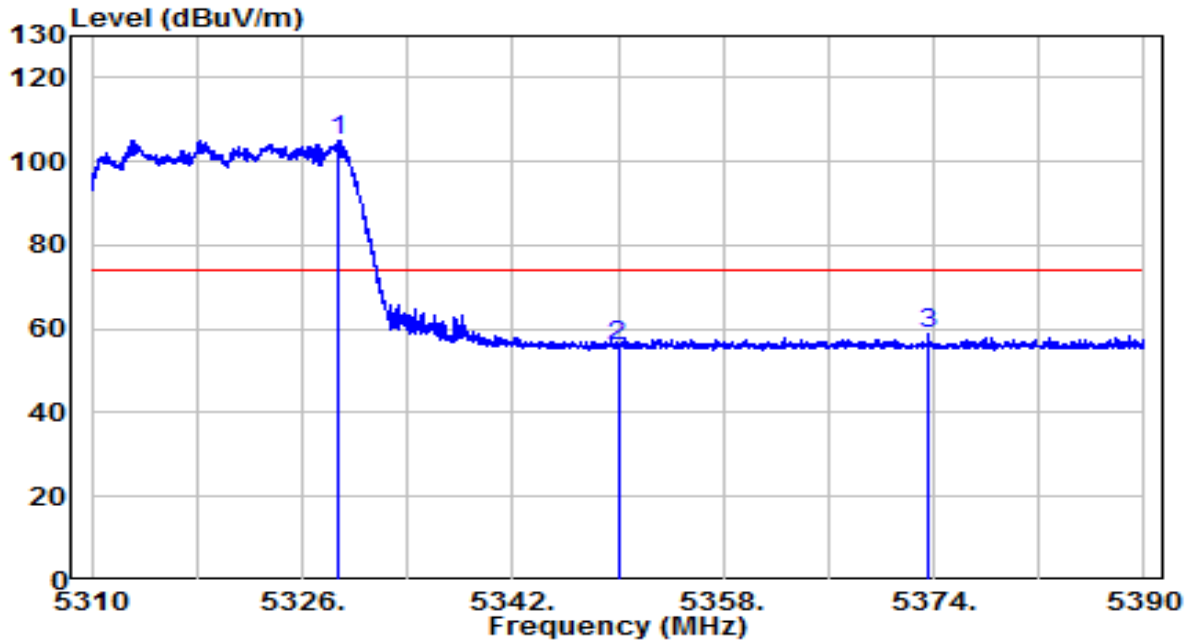


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5328.720	85.08	20.09	105.17	N/A	N/A	Peak
2		5350.000	35.69	20.11	55.80	-18.20	74.00	Peak
3		5373.520	38.73	20.14	58.87	-15.13	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6000 次世代 Wi-Fi 路由器	Date of Test	2021-06-27
Factor	BBHA 9120D	Temp. / Humidity	24.4°C/37%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE20 at Channel 5320MHz	Test Voltage	AC 110V/60Hz

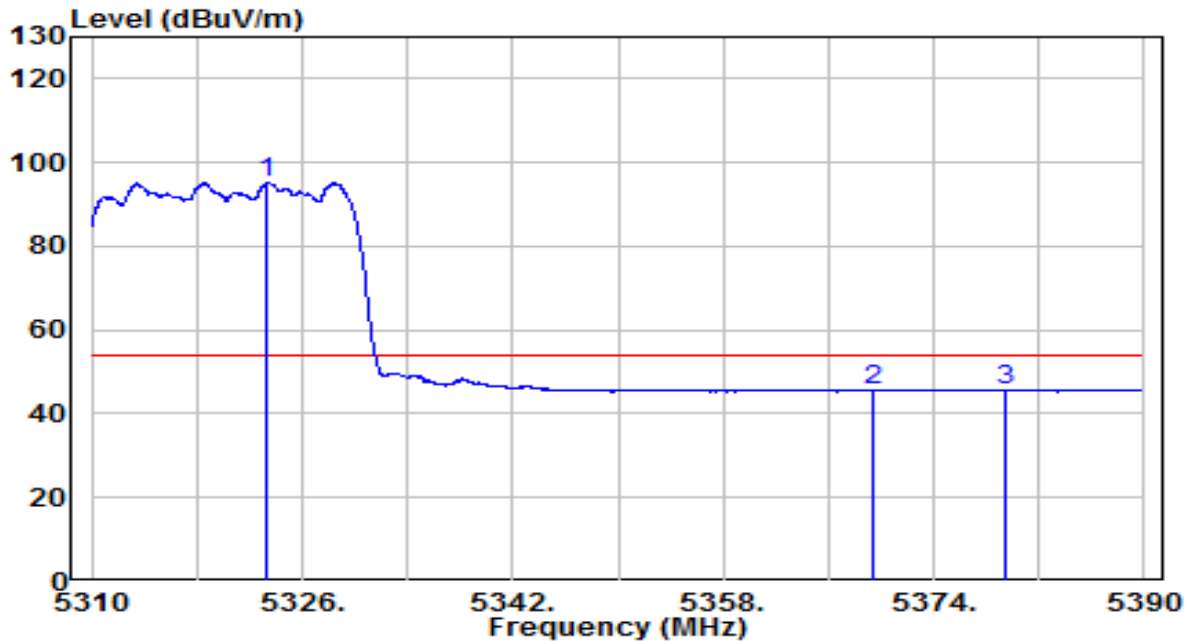


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5323.360	74.99	20.09	95.08	N/A	N/A	Average
2		5369.320	25.50	20.13	45.63	-8.37	54.00	Average
3		5379.480	25.69	20.14	45.84	-8.16	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6000 次世代 Wi-Fi 路由器	Date of Test	2021-06-27
Factor	BBHA 9120D	Temp. / Humidity	24.4°C/37%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE20 at Channel 5320MHz	Test Voltage	AC 110V/60Hz

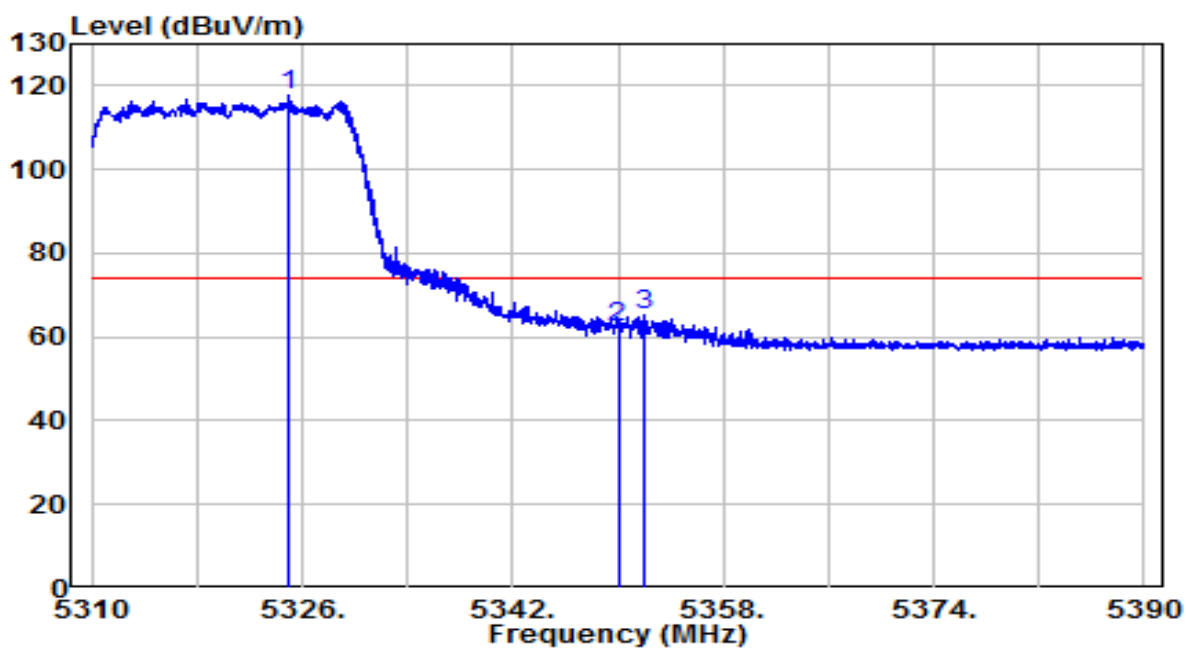


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5325.040	97.70	20.09	117.79	N/A	N/A	Peak
2		5350.000	41.95	20.11	62.06	-11.94	74.00	Peak
3		5351.920	44.95	20.12	65.07	-8.93	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6000 次世代 Wi-Fi 路由器	Date of Test	2021-06-27
Factor	BBHA 9120D	Temp. / Humidity	24.4°C/37%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE20 at Channel 5320MHz	Test Voltage	AC 110V/60Hz

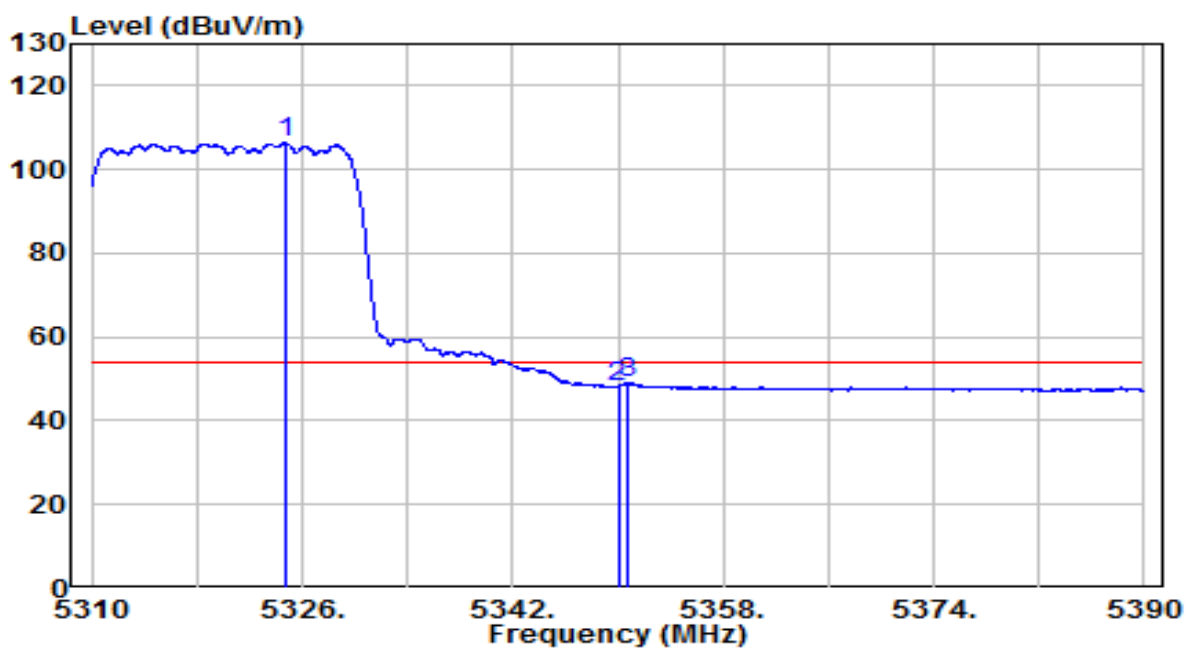


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5324.800	86.23	20.09	106.32	N/A	N/A	Average
2		5350.000	28.11	20.11	48.22	-5.78	54.00	Average
3		5350.640	28.92	20.11	49.03	-4.97	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6000 次世代 Wi-Fi 路由器	Date of Test	2021-06-27
Factor	BBHA 9120D	Temp. / Humidity	24.4°C/37%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE20 at Channel 5500MHz	Test Voltage	AC 110V/60Hz

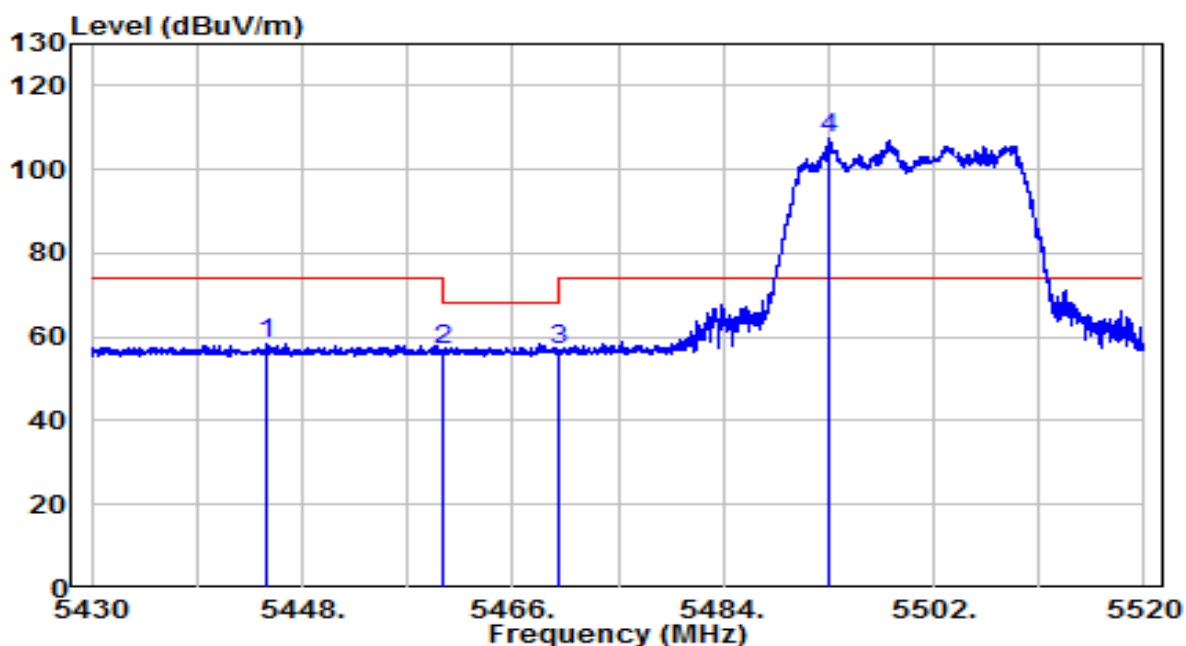


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5444.985	38.04	20.21	58.25	-15.75	74.00	Peak
2	5460.000	36.53	20.23	56.76	-11.44	68.20	Peak
3	5470.000	36.59	20.24	56.83	-11.37	68.20	Peak
4	* 5493.090	87.12	20.26	107.38	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6000 次世代 Wi-Fi 路由器	Date of Test	2021-06-27
Factor	BBHA 9120D	Temp. / Humidity	24.4°C/37%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE20 at Channel 5500MHz	Test Voltage	AC 110V/60Hz

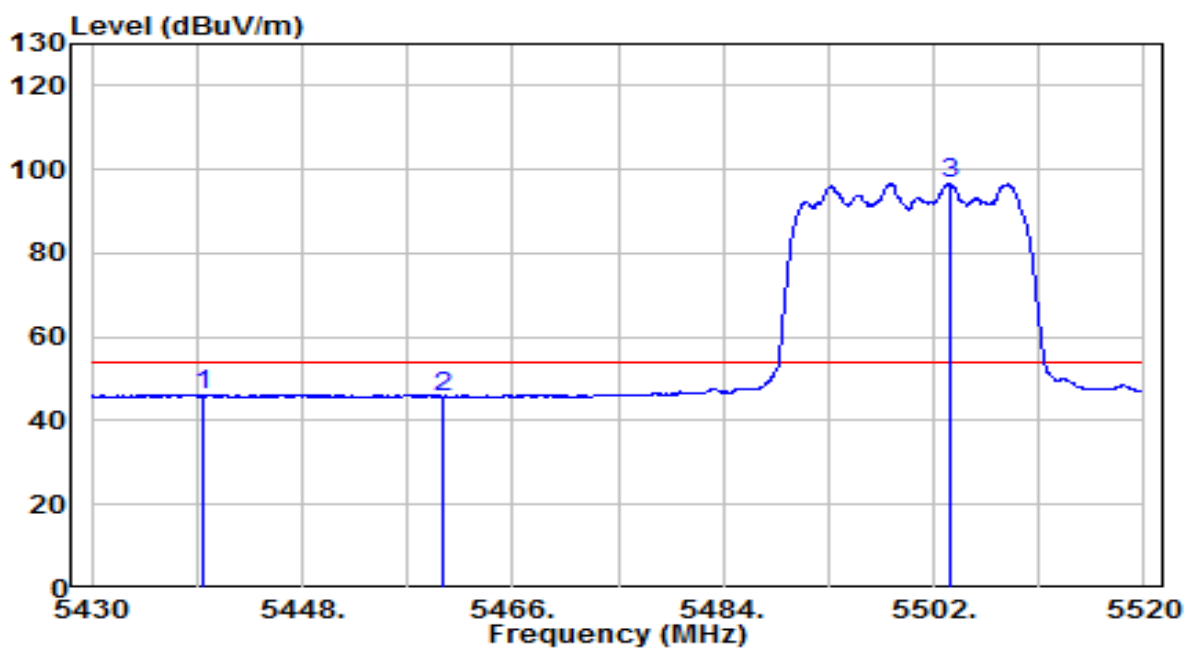


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5439.540	25.87	20.21	46.08	-7.92	54.00	Average
2	5460.000	25.51	20.23	45.74	-8.26	54.00	Average
3	* 5503.305	76.27	20.28	96.55	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6000 次世代 Wi-Fi 路由器	Date of Test	2021-06-27
Factor	BBHA 9120D	Temp. / Humidity	24.4°C/37%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE20 at Channel 5500MHz	Test Voltage	AC 110V/60Hz

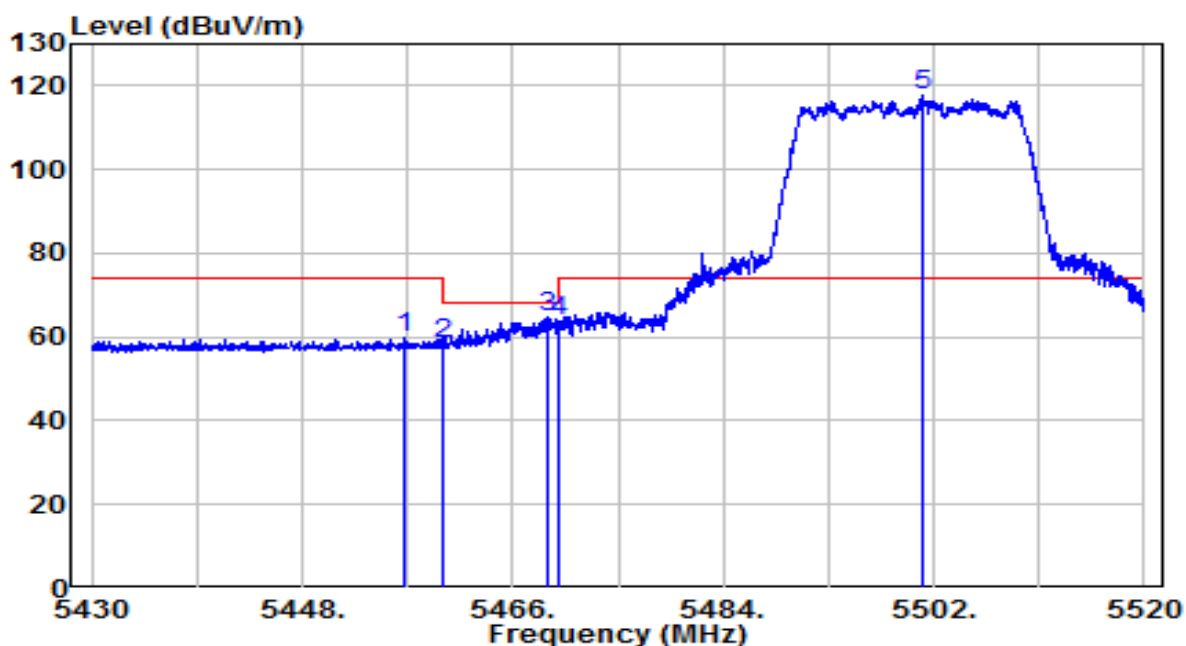


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5456.820	39.52	20.23	59.75	-14.25	74.00	Peak
2	5460.015	37.91	20.23	58.14	-10.06	68.20	Peak
3	5469.105	44.59	20.24	64.83	-3.37	68.20	Peak
4	5470.000	43.44	20.24	63.68	-4.52	68.20	Peak
5	* 5501.100	97.22	20.27	117.49	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6000 次世代 Wi-Fi 路由器	Date of Test	2021-06-27
Factor	BBHA 9120D	Temp. / Humidity	24.4°C/37%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE20 at Channel 5500MHz	Test Voltage	AC 110V/60Hz

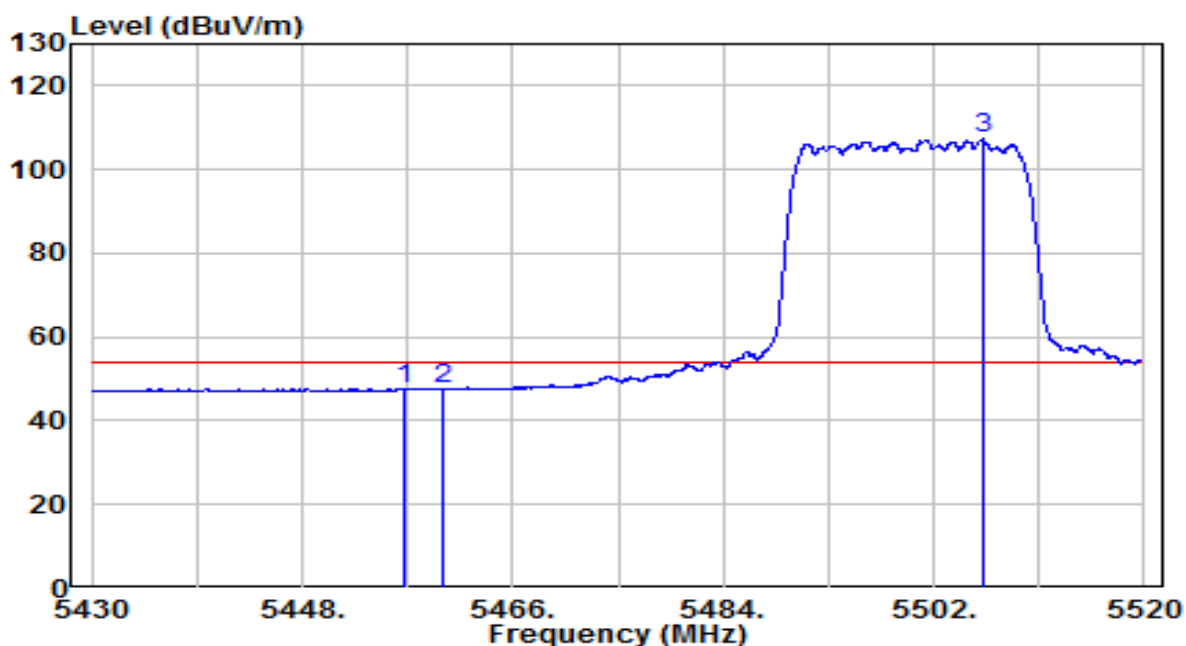


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5456.640	27.58	20.22	47.80	-6.20	54.00	Average
2	5460.015	27.46	20.23	47.68	-6.32	54.00	Average
3	* 5506.140	86.91	20.29	107.20	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6000 次世代 Wi-Fi 路由器	Date of Test	2021-06-27
Factor	BBHA 9120D	Temp. / Humidity	24.4°C/37%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE20 at Channel 5700MHz	Test Voltage	AC 110V/60Hz

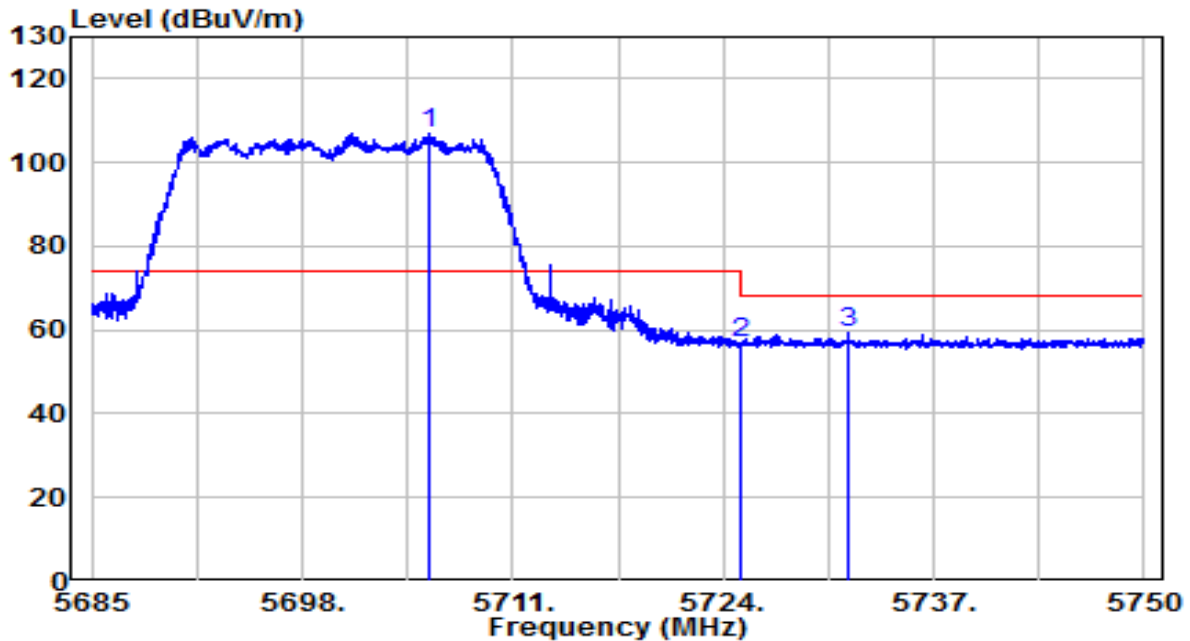


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5705.768	85.90	20.94	106.83	N/A	N/A	Peak
2		5725.007	35.96	21.00	56.95	-11.25	68.20	Peak
3		5731.768	38.25	21.02	59.27	-8.93	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6000 次世代 Wi-Fi 路由器	Date of Test	2021-06-27
Factor	BBHA 9120D	Temp. / Humidity	24.4°C/37%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE20 at Channel 5700MHz	Test Voltage	AC 110V/60Hz

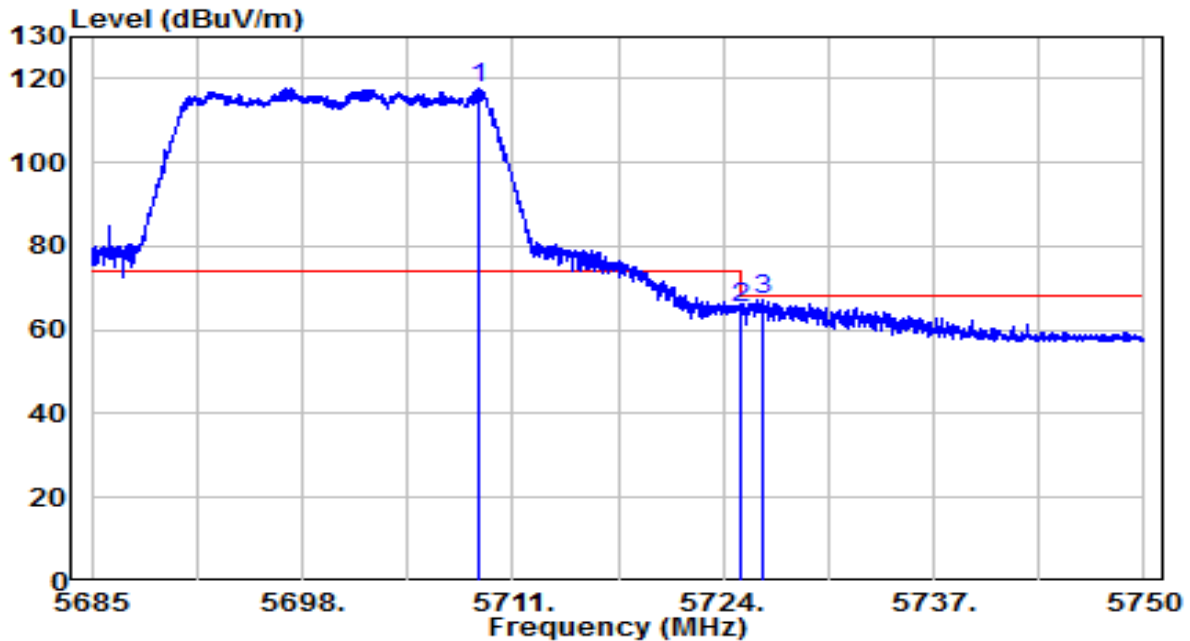


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5708.888	96.87	20.95	117.82	N/A	N/A	Peak
2		5725.007	44.47	21.00	65.47	-2.73	68.20	Peak
3		5726.373	46.18	21.00	67.18	-1.02	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6000 次世代 Wi-Fi 路由器	Date of Test	2021-06-27
Factor	BBHA 9120D	Temp. / Humidity	24.4°C/37%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE20 at Channel 5745MHz	Test Voltage	AC 110V/60Hz

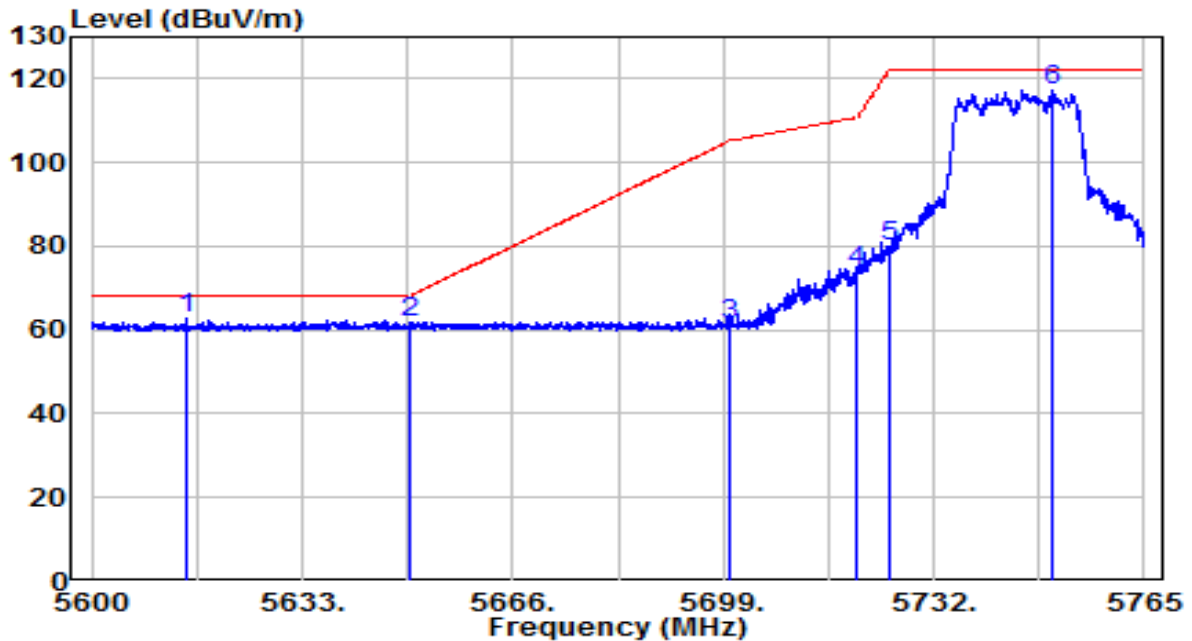


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5614.850	42.34	20.64	62.98	-5.22	68.20	Peak
2	5649.995	40.83	20.76	61.58	-6.62	68.20	Peak
3	5700.000	40.56	20.92	61.47	-43.73	105.20	Peak
4	5720.000	53.23	20.98	74.21	-36.59	110.80	Peak
5	5725.000	59.06	21.00	80.06	-42.14	122.20	Peak
6	* 5750.563	96.07	21.08	117.15	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6000 次世代 Wi-Fi 路由器	Date of Test	2021-06-27
Factor	BBHA 9120D	Temp. / Humidity	24.4°C/37%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE20 at Channel 5745MHz	Test Voltage	AC 110V/60Hz

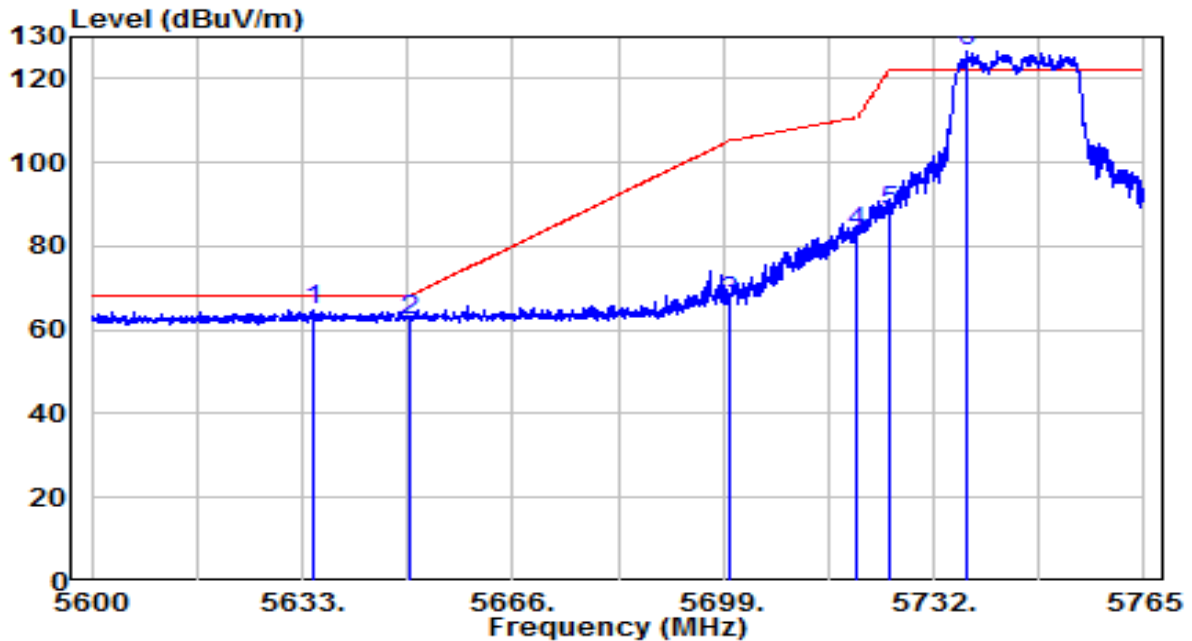


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5634.567	44.06	20.71	64.76	-3.44	68.20	Peak
2	5649.995	41.63	20.76	62.38	-5.82	68.20	Peak
3	5700.000	45.97	20.92	66.88	-38.32	105.20	Peak
4	5720.000	62.51	20.98	83.49	-27.31	110.80	Peak
5	5725.000	67.29	21.00	88.29	-33.91	122.20	Peak
6	* 5737.362	105.57	21.04	126.61	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6000 次世代 Wi-Fi 路由器	Date of Test	2021-06-27
Factor	BBHA 9120D	Temp. / Humidity	24.4°C/37%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE20 at Channel 5825MHz	Test Voltage	AC 110V/60Hz

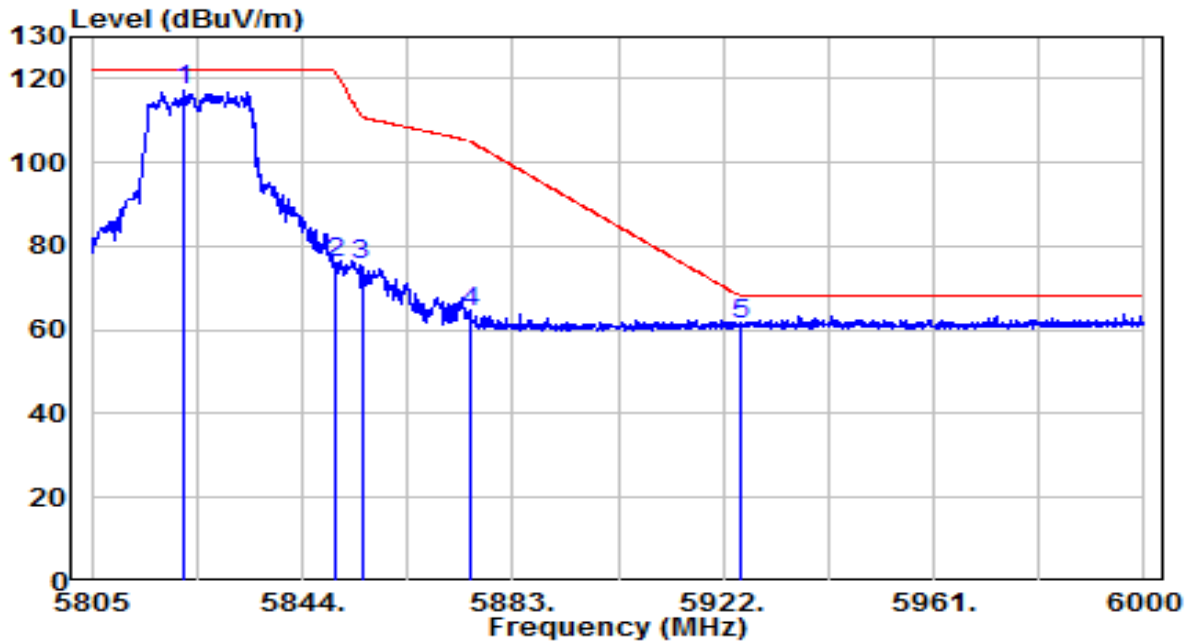


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5822.049	95.80	21.31	117.12	N/A	N/A	Peak
2		5850.000	54.70	21.40	76.10	-46.10	122.20	Peak
3		5855.000	54.05	21.42	75.47	-35.33	110.80	Peak
4		5875.000	42.64	21.49	64.13	-41.07	105.20	Peak
5		5925.000	39.72	21.65	61.37	-6.83	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6000 次世代 Wi-Fi 路由器	Date of Test	2021-06-27
Factor	BBHA 9120D	Temp. / Humidity	24.4°C/37%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE20 at Channel 5825MHz	Test Voltage	AC 110V/60Hz

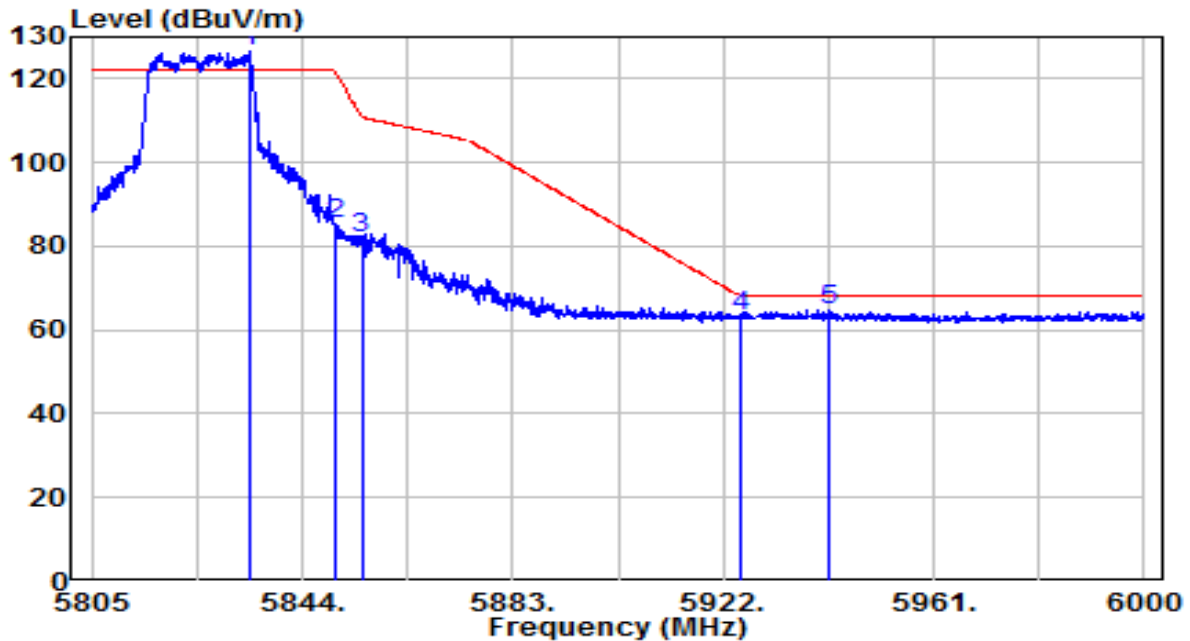


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5834.199	105.25	21.35	126.60	N/A	N/A	Peak
2		5849.974	63.72	21.40	85.12	-37.08	122.20	Peak
3		5855.000	60.34	21.42	81.76	-29.04	110.80	Peak
4		5925.000	41.87	21.65	63.52	-4.68	68.20	Peak
5		5941.588	43.13	21.70	64.84	-3.36	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6000 次世代 Wi-Fi 路由器	Date of Test	2021-06-27
Factor	BBHA 9120D	Temp. / Humidity	24.4°C/37%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE40 at Channel 5190MHz	Test Voltage	AC 110V/60Hz

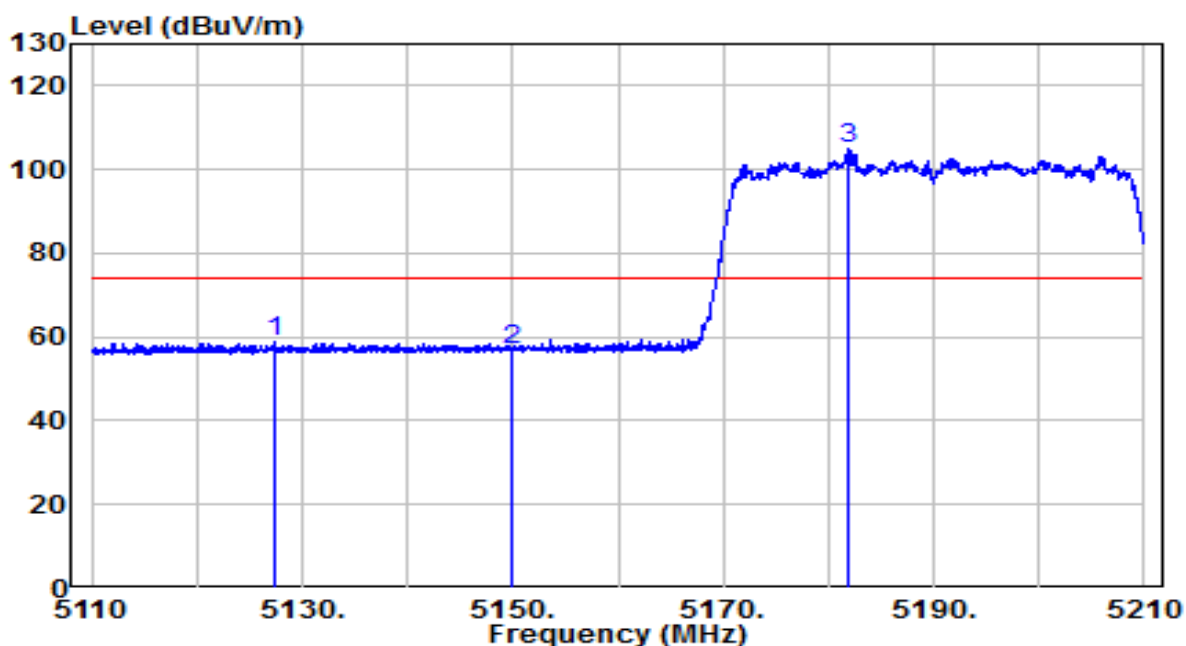


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5127.350	38.95	19.88	58.84	-15.16	74.00	Peak
2	5150.000	37.06	19.91	56.97	-17.03	74.00	Peak
3	* 5182.000	84.95	19.94	104.89	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6000 次世代 Wi-Fi 路由器	Date of Test	2021-06-27
Factor	BBHA 9120D	Temp. / Humidity	24.4°C/37%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE40 at Channel 5190MHz	Test Voltage	AC 110V/60Hz

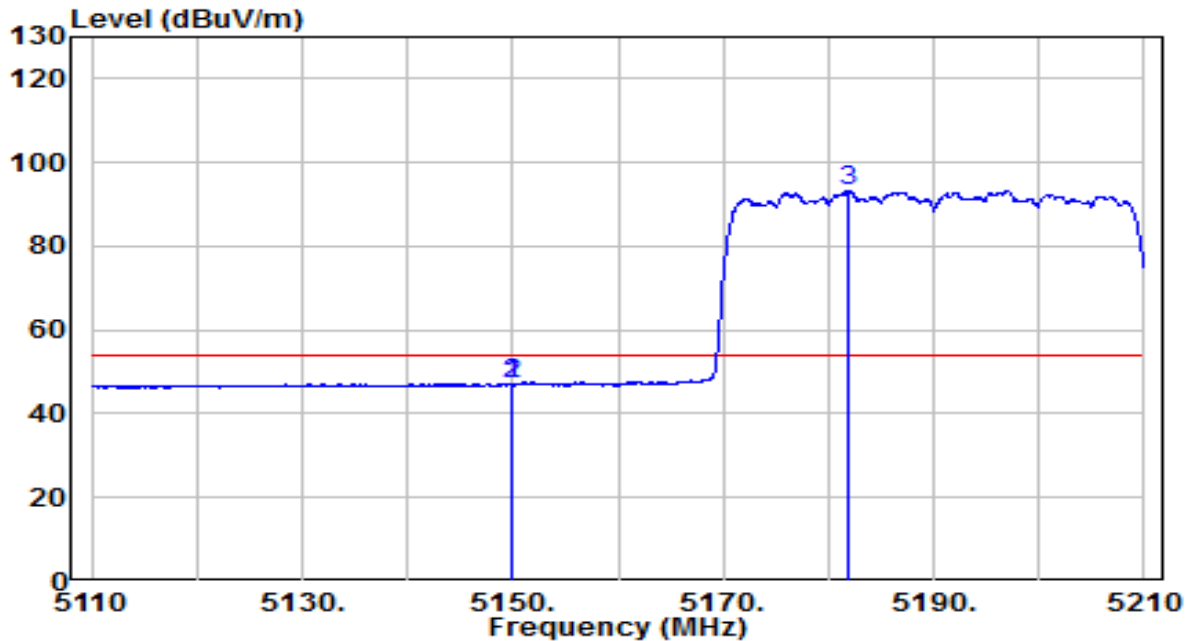


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5149.900	27.21	19.91	47.12	-6.88	54.00	Average
2	5150.000	27.17	19.91	47.08	-6.92	54.00	Average
3	* 5181.900	73.45	19.94	93.39	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6000 次世代 Wi-Fi 路由器	Date of Test	2021-06-27
Factor	BBHA 9120D	Temp. / Humidity	24.4°C/37%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE40 at Channel 5190MHz	Test Voltage	AC 110V/60Hz

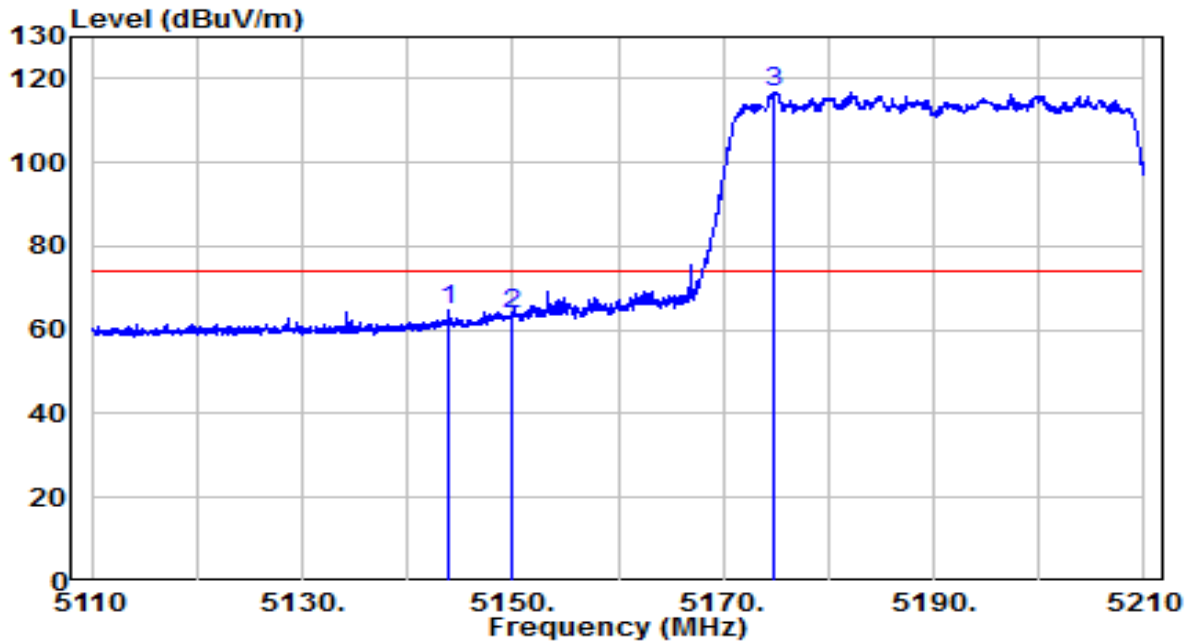


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5144.000	44.68	19.90	64.58	-9.42	74.00	Peak
2	5150.000	43.97	19.91	63.87	-10.13	74.00	Peak
3	* 5174.850	96.82	19.93	116.75	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6000 次世代 Wi-Fi 路由器	Date of Test	2021-06-27
Factor	BBHA 9120D	Temp. / Humidity	24.4°C/37%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE40 at Channel 5190MHz	Test Voltage	AC 110V/60Hz

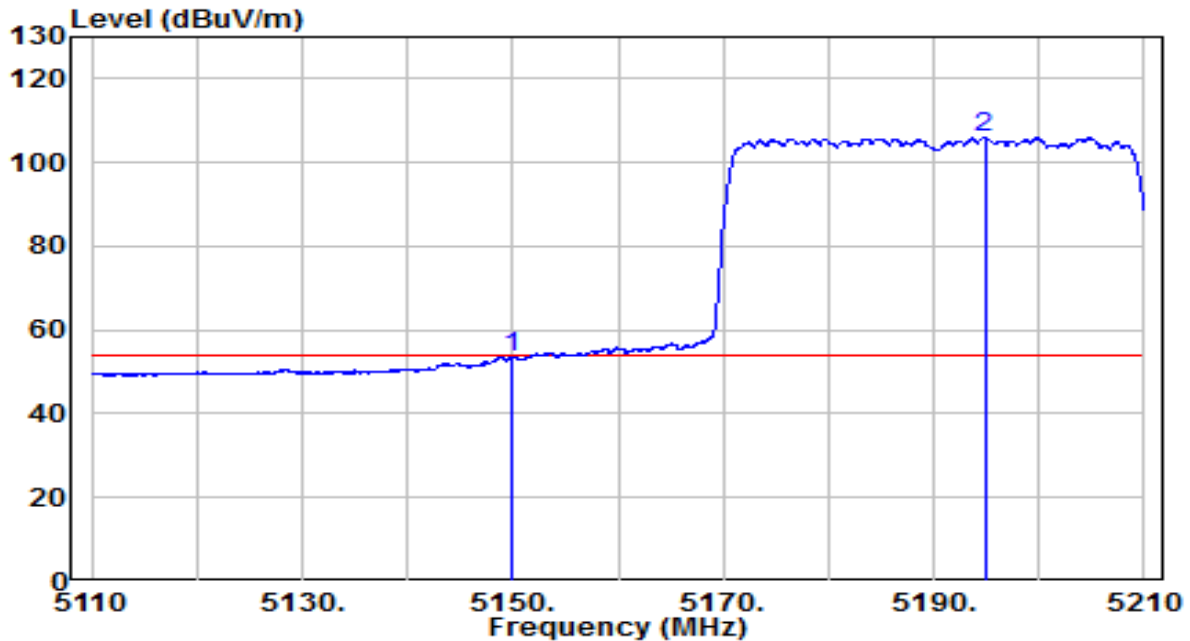


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5150.000	33.80	19.91	53.71	-0.29	54.00	Average
2	* 5194.850	86.16	19.95	106.11	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6000 次世代 Wi-Fi 路由器	Date of Test	2021-06-27
Factor	BBHA 9120D	Temp. / Humidity	24.4°C/37%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE40 at Channel 5310MHz	Test Voltage	AC 110V/60Hz

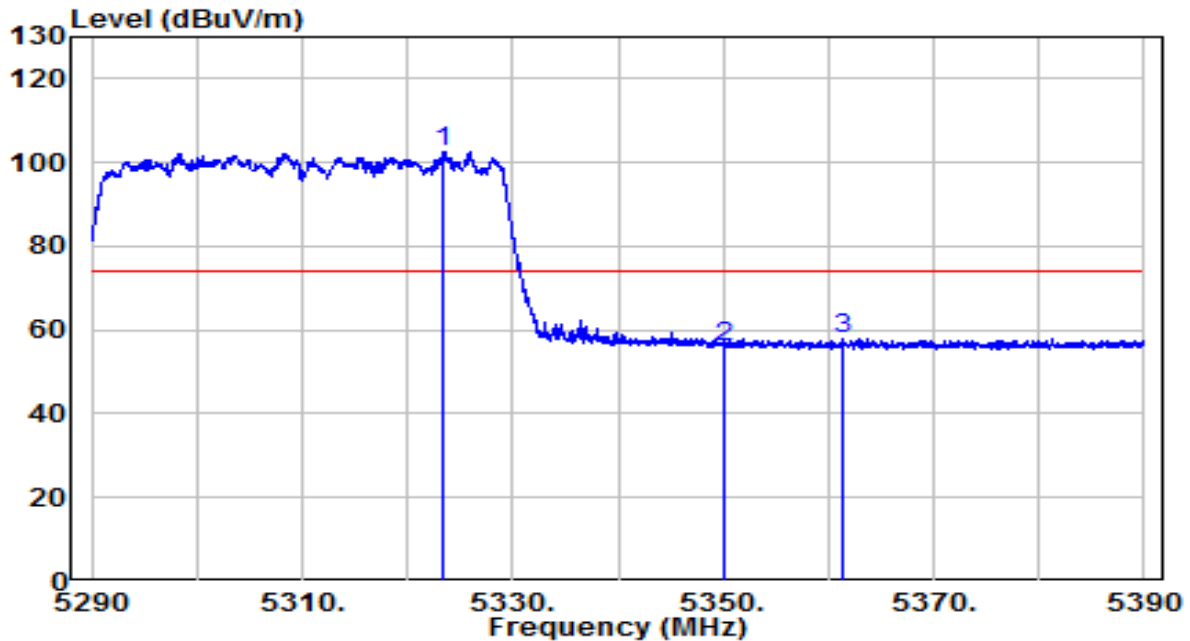


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5323.450	82.41	20.09	102.50	N/A	N/A	Peak
2		5350.000	36.01	20.11	56.12	-17.88	74.00	Peak
3		5361.250	37.75	20.13	57.88	-16.12	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6000 次世代 Wi-Fi 路由器	Date of Test	2021-06-27
Factor	BBHA 9120D	Temp. / Humidity	24.4°C/37%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE40 at Channel 5310MHz	Test Voltage	AC 110V/60Hz

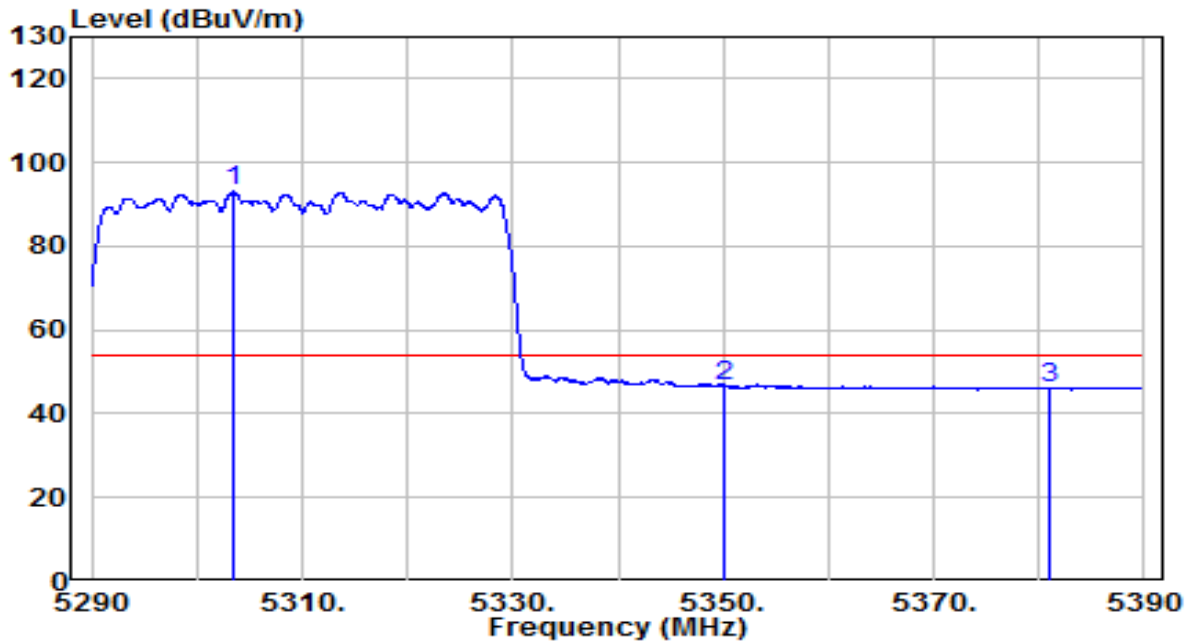


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5303.450	72.97	20.07	93.04	N/A	N/A	Average
2		5350.000	26.54	20.11	46.66	-7.34	54.00	Average
3		5381.100	26.18	20.15	46.33	-7.67	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6000 次世代 Wi-Fi 路由器	Date of Test	2021-06-27
Factor	BBHA 9120D	Temp. / Humidity	24.4°C/37%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE40 at Channel 5310MHz	Test Voltage	AC 110V/60Hz

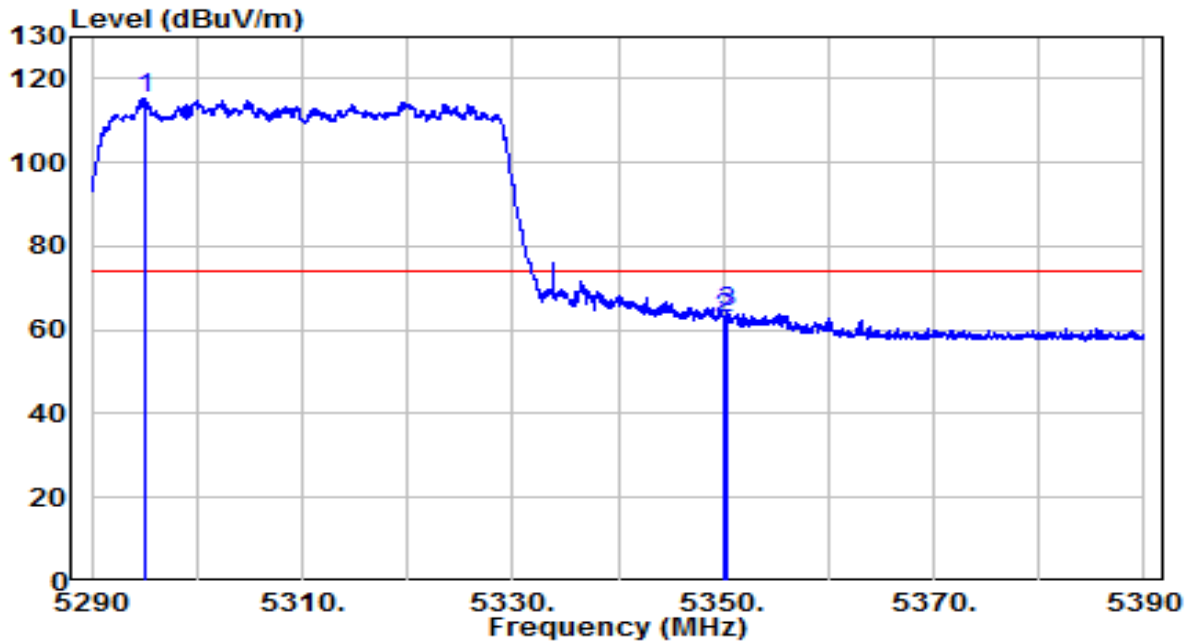


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5295.000	95.42	20.06	115.48	N/A	N/A	Peak
2		5350.000	42.45	20.11	62.57	-11.43	74.00	Peak
3		5350.400	43.96	20.11	64.08	-9.92	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6000 次世代 Wi-Fi 路由器	Date of Test	2021-06-27
Factor	BBHA 9120D	Temp. / Humidity	24.4°C/37%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE40 at Channel 5310MHz	Test Voltage	AC 110V/60Hz

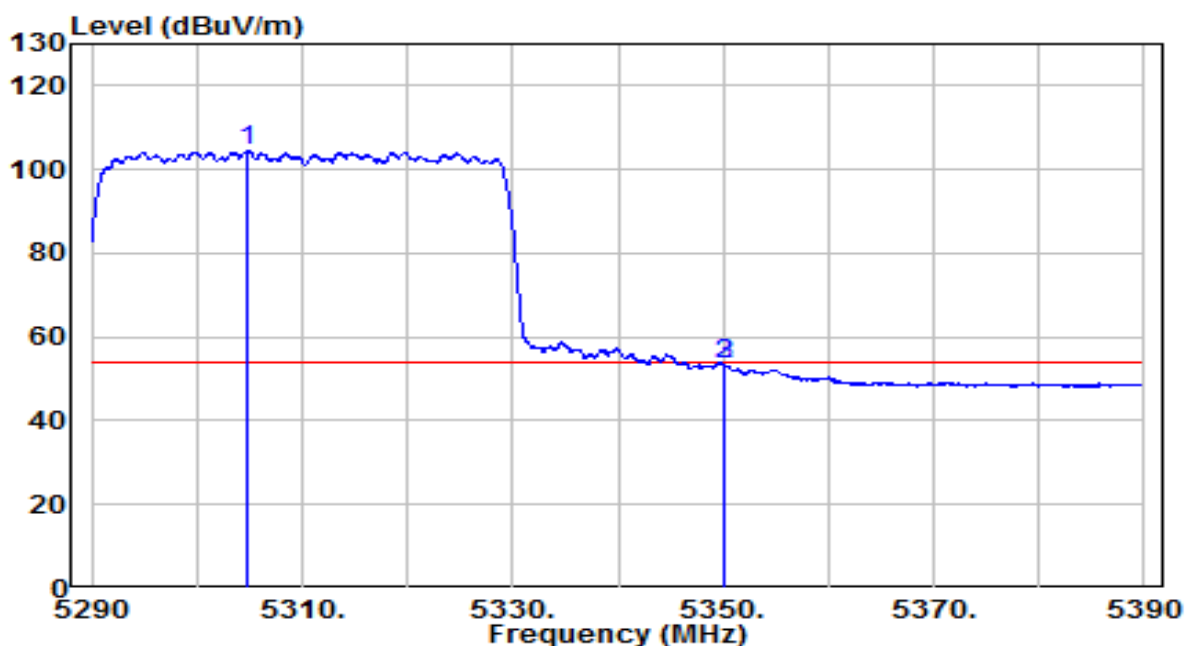


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5304.800	84.44	20.07	104.51	N/A	N/A	Average
2		5350.000	33.41	20.11	53.52	-0.48	54.00	Average
3		5350.050	33.57	20.11	53.68	-0.32	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6000 次世代 Wi-Fi 路由器	Date of Test	2021-06-27
Factor	BBHA 9120D	Temp. / Humidity	24.4°C/37%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE40 at Channel 5510MHz	Test Voltage	AC 110V/60Hz

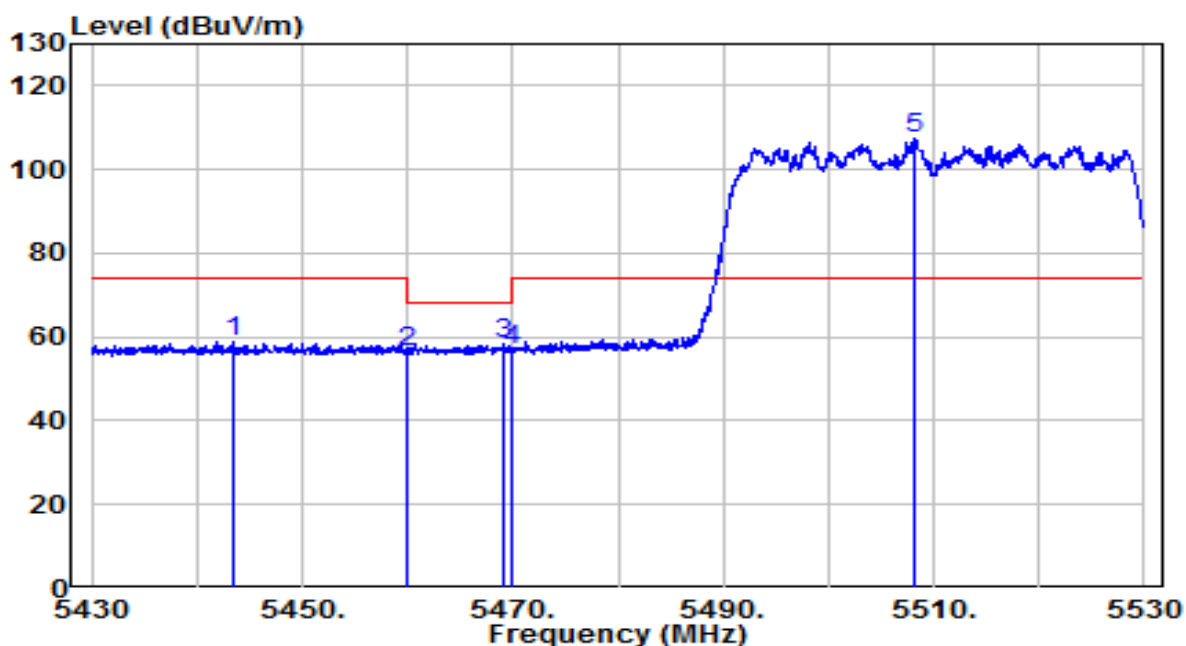


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5443.450	38.47	20.21	58.68	-15.32	74.00	Peak
2	5460.000	36.32	20.23	56.55	-11.65	68.20	Peak
3	5469.200	37.95	20.24	58.19	-10.01	68.20	Peak
4	5470.000	36.71	20.24	56.95	-11.25	68.20	Peak
5	* 5508.050	86.99	20.30	107.28	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6000 次世代 Wi-Fi 路由器	Date of Test	2021-06-27
Factor	BBHA 9120D	Temp. / Humidity	24.4°C/37%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE40 at Channel 5510MHz	Test Voltage	AC 110V/60Hz

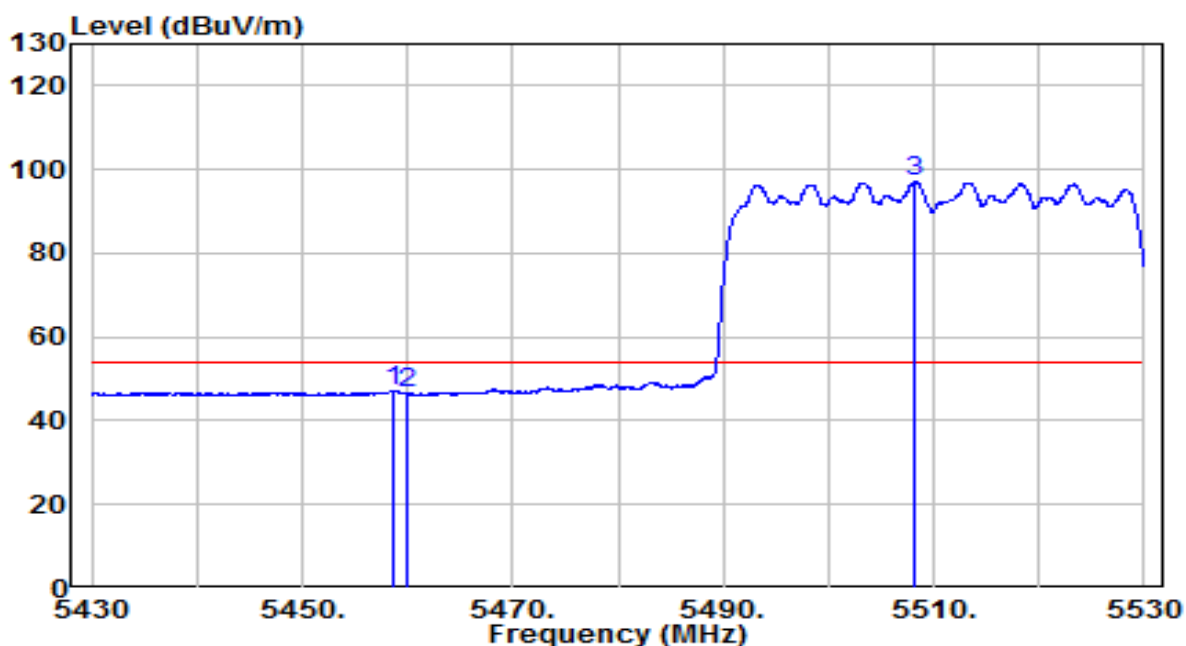


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5458.600	27.01	20.23	47.24	-6.76	54.00	Average
2	5460.000	26.31	20.23	46.54	-7.46	54.00	Average
3	* 5508.250	76.68	20.30	96.98	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6000 次世代 Wi-Fi 路由器	Date of Test	2021-06-27
Factor	BBHA 9120D	Temp. / Humidity	24.4°C/37%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE40 at Channel 5510MHz	Test Voltage	AC 110V/60Hz

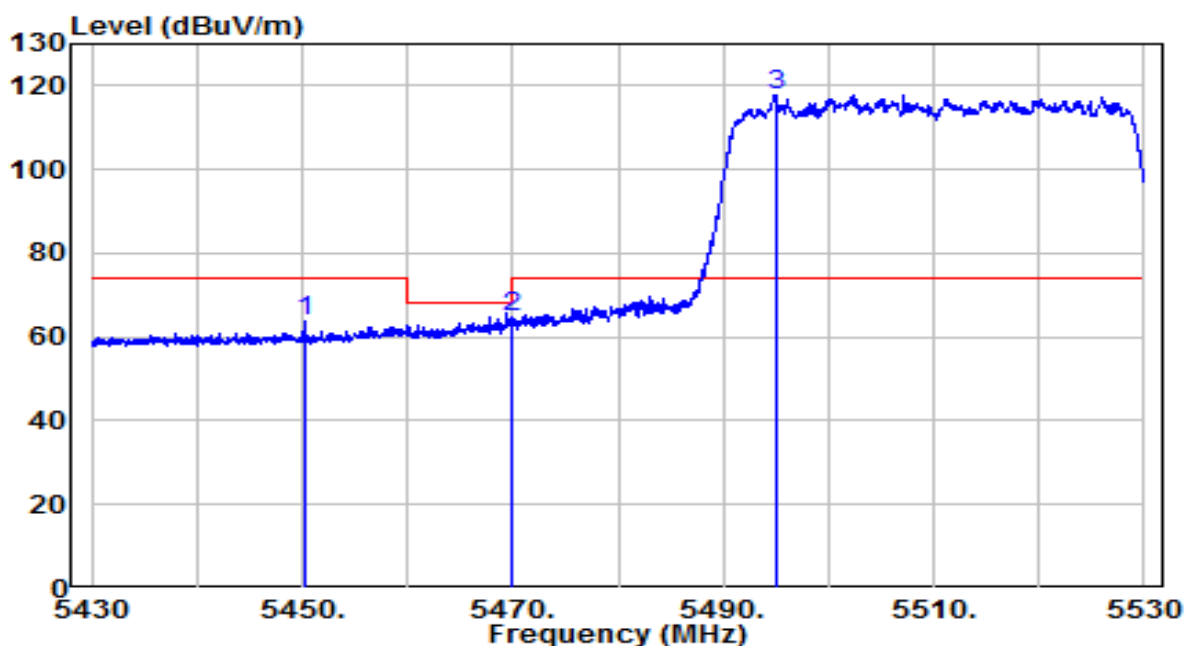


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5450.150	43.77	20.22	63.99	-10.01	74.00	Peak
2	5470.000	44.48	20.24	64.72	-3.48	68.20	Peak
3	* 5495.000	97.52	20.26	117.78	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6000 次世代 Wi-Fi 路由器	Date of Test	2021-06-27
Factor	BBHA 9120D	Temp. / Humidity	24.4°C/37%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE40 at Channel 5510MHz	Test Voltage	AC 110V/60Hz

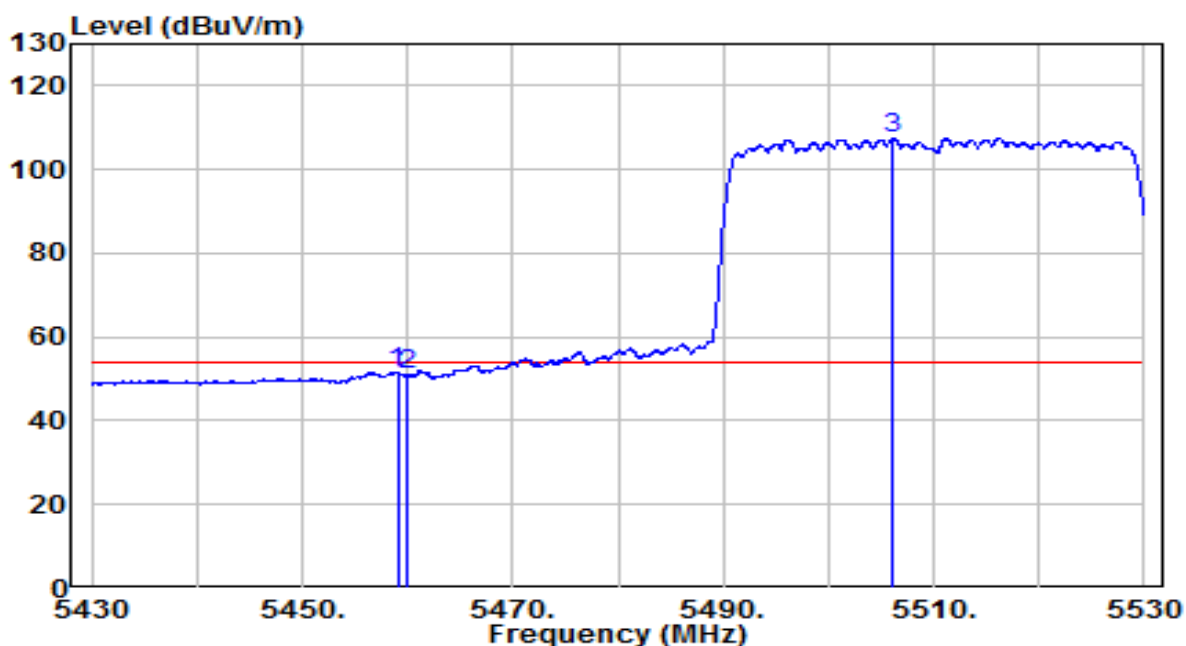


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5459.050	31.50	20.23	51.73	-2.27	54.00	Average
2	5460.000	30.60	20.23	50.83	-3.17	54.00	Average
3	* 5506.100	87.18	20.29	107.47	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6000 次世代 Wi-Fi 路由器	Date of Test	2021-06-27
Factor	BBHA 9120D	Temp. / Humidity	24.4°C/37%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE40 at Channel 5670MHz	Test Voltage	AC 110V/60Hz

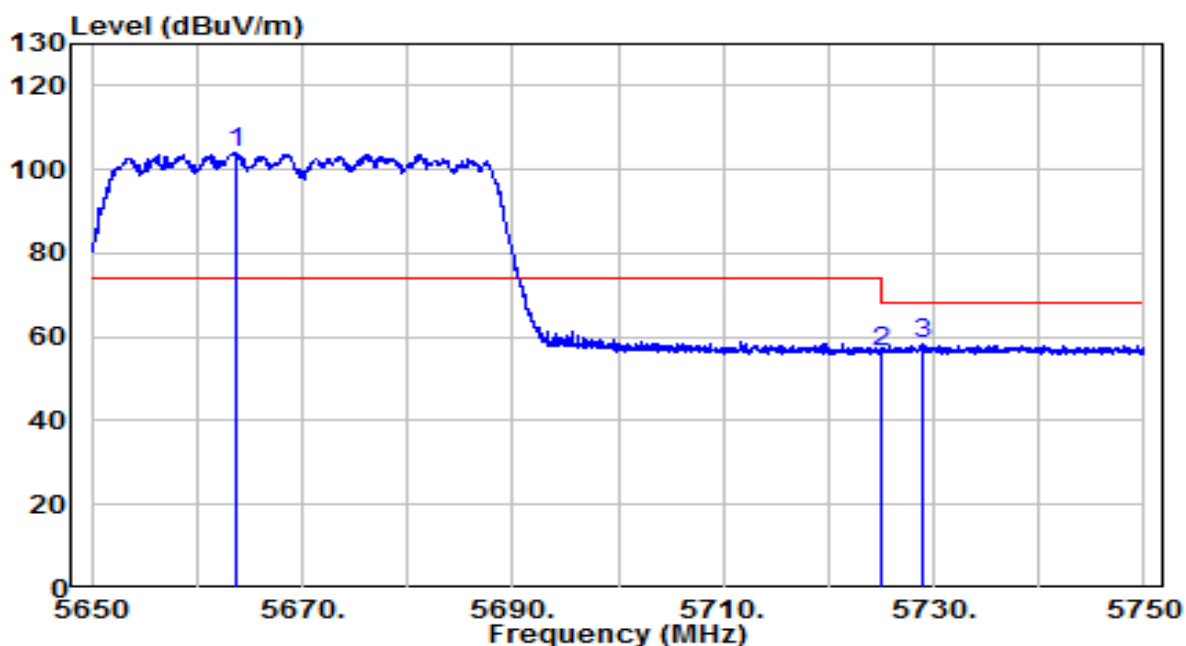


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5663.600	83.24	20.80	104.04	N/A	N/A	Peak
2		5725.000	35.54	21.00	56.54	-11.66	68.20	Peak
3		5728.850	37.40	21.01	58.41	-9.79	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6000 次世代 Wi-Fi 路由器	Date of Test	2021-06-27
Factor	BBHA 9120D	Temp. / Humidity	24.4°C/37%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE40 at Channel 5670MHz	Test Voltage	AC 110V/60Hz

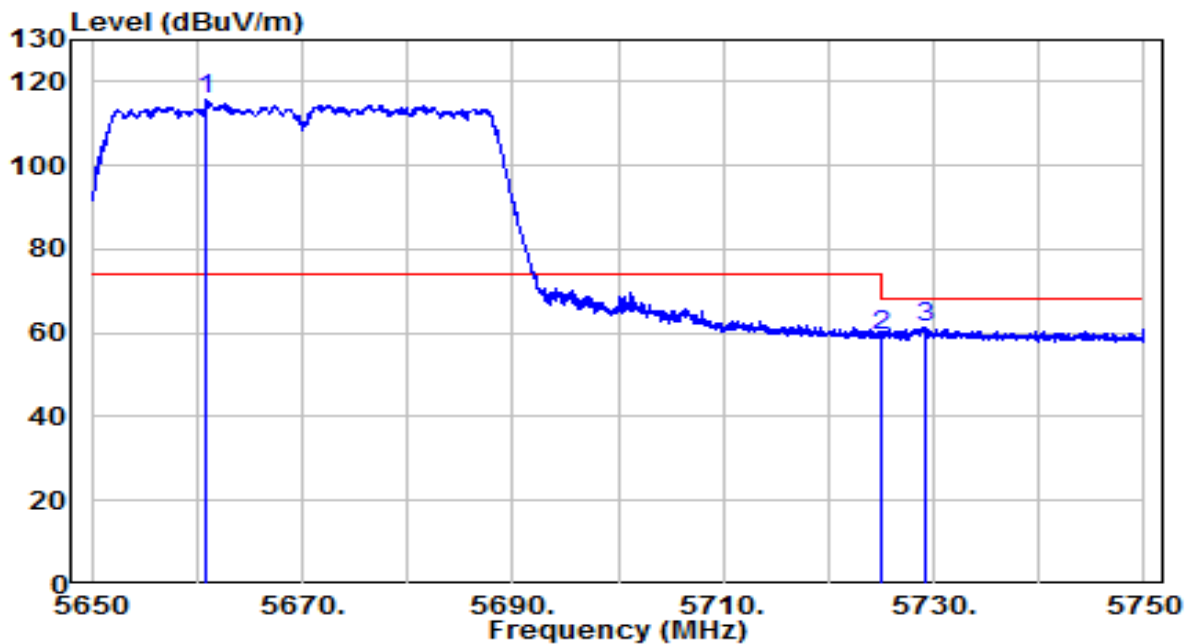


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5660.950	94.89	20.79	115.68	N/A	N/A	Peak
2		5725.000	38.15	21.00	59.15	-9.05	68.20	Peak
3		5729.150	40.50	21.01	61.51	-6.69	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6000 次世代 Wi-Fi 路由器	Date of Test	2021-06-27
Factor	BBHA 9120D	Temp. / Humidity	24.4°C/37%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE40 at Channel 5755MHz	Test Voltage	AC 110V/60Hz

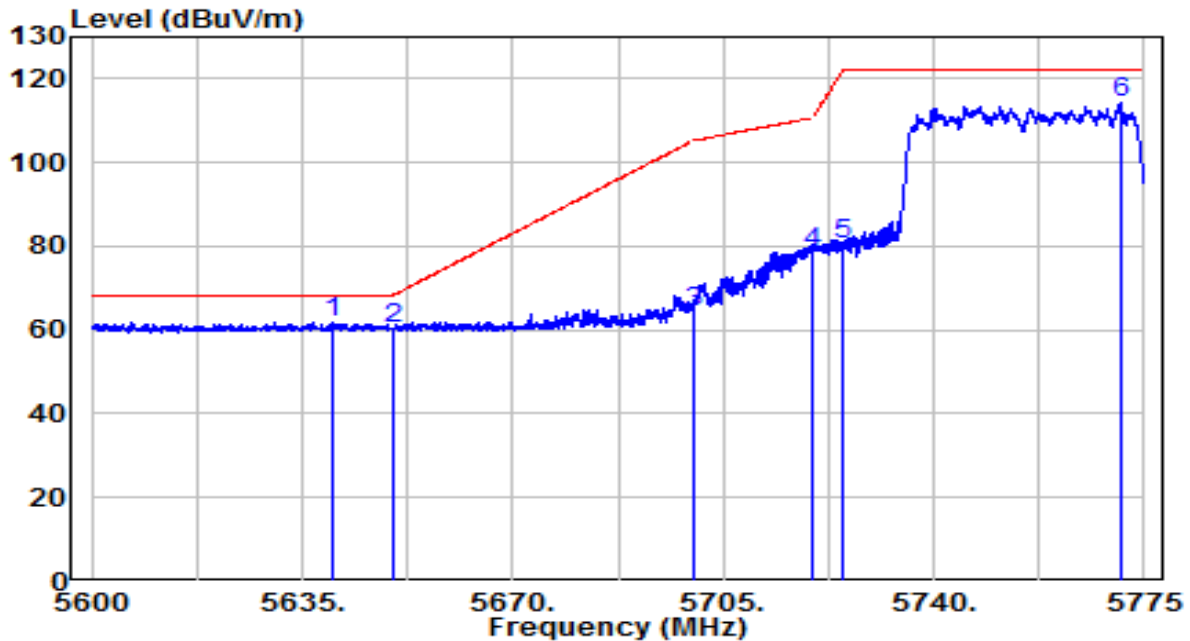


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5640.250	41.16	20.72	61.88	-6.32	68.20	Peak
2		5649.962	39.79	20.76	60.55	-7.65	68.20	Peak
3		5700.000	43.54	20.92	64.46	-40.74	105.20	Peak
4		5720.000	57.75	20.98	78.73	-32.07	110.80	Peak
5		5725.000	59.24	21.00	80.24	-41.96	122.20	Peak
6		5771.063	93.05	21.15	114.20	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6000 次世代 Wi-Fi 路由器	Date of Test	2021-06-27
Factor	BBHA 9120D	Temp. / Humidity	24.4°C/37%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE40 at Channel 5755MHz	Test Voltage	AC 110V/60Hz

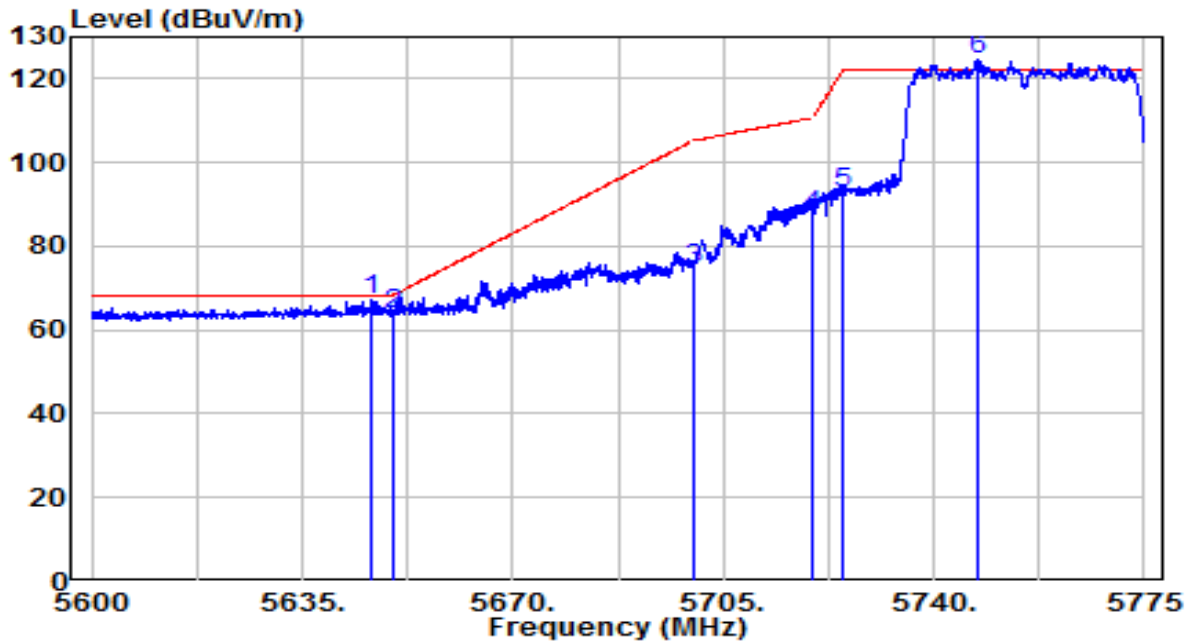


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5646.638	46.56	20.75	67.31	-0.89	68.20	Peak
2	5649.962	43.02	20.76	63.78	-4.42	68.20	Peak
3	5700.000	53.73	20.92	74.64	-30.56	105.20	Peak
4	5720.000	66.32	20.98	87.31	-23.49	110.80	Peak
5	5725.000	71.50	21.00	92.50	-29.70	122.20	Peak
6	* 5747.263	103.48	21.07	124.55	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6000 次世代 Wi-Fi 路由器	Date of Test	2021-06-27
Factor	BBHA 9120D	Temp. / Humidity	24.4°C/37%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE40 at Channel 5795MHz	Test Voltage	AC 110V/60Hz

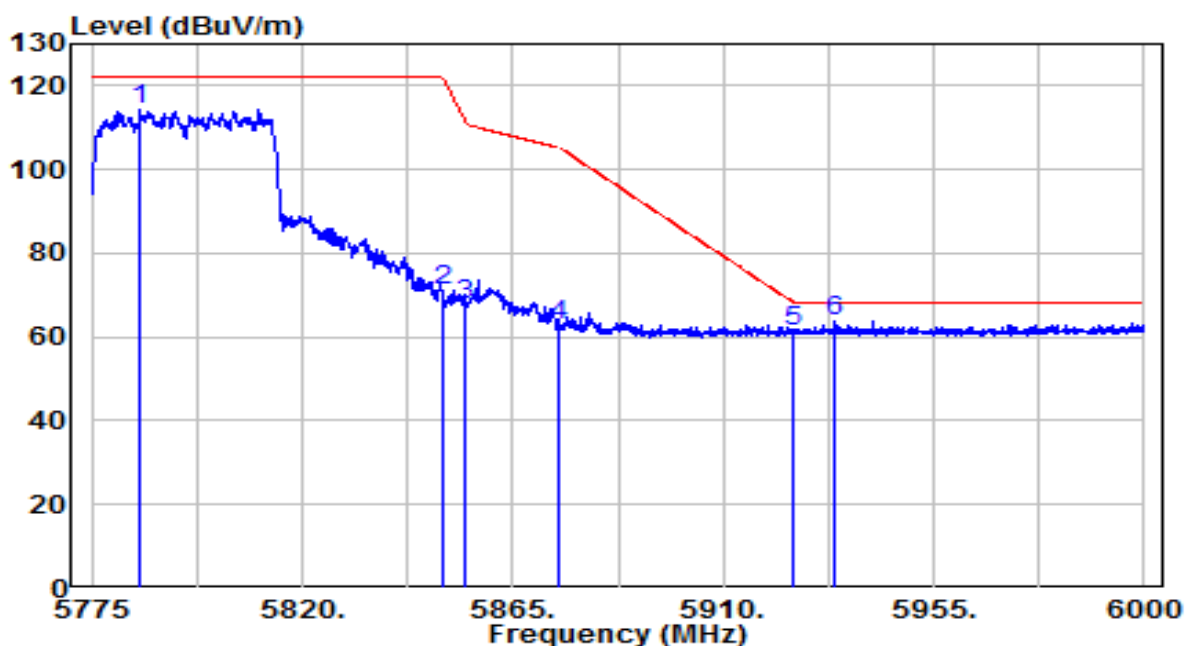


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5785.350	93.10	21.19	114.30	N/A	N/A	Peak
2	5850.038	49.51	21.40	70.91	-51.20	122.11	Peak
3	5855.000	46.23	21.42	67.65	-43.15	110.80	Peak
4	5875.000	41.11	21.49	62.60	-42.60	105.20	Peak
5	5925.000	39.66	21.65	61.31	-6.89	68.20	Peak
6	* 5933.737	41.91	21.68	63.58	-4.62	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6000 次世代 Wi-Fi 路由器	Date of Test	2021-06-27
Factor	BBHA 9120D	Temp. / Humidity	24.4°C/37%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE40 at Channel 5795MHz P=90	Test Voltage	AC 110V/60Hz

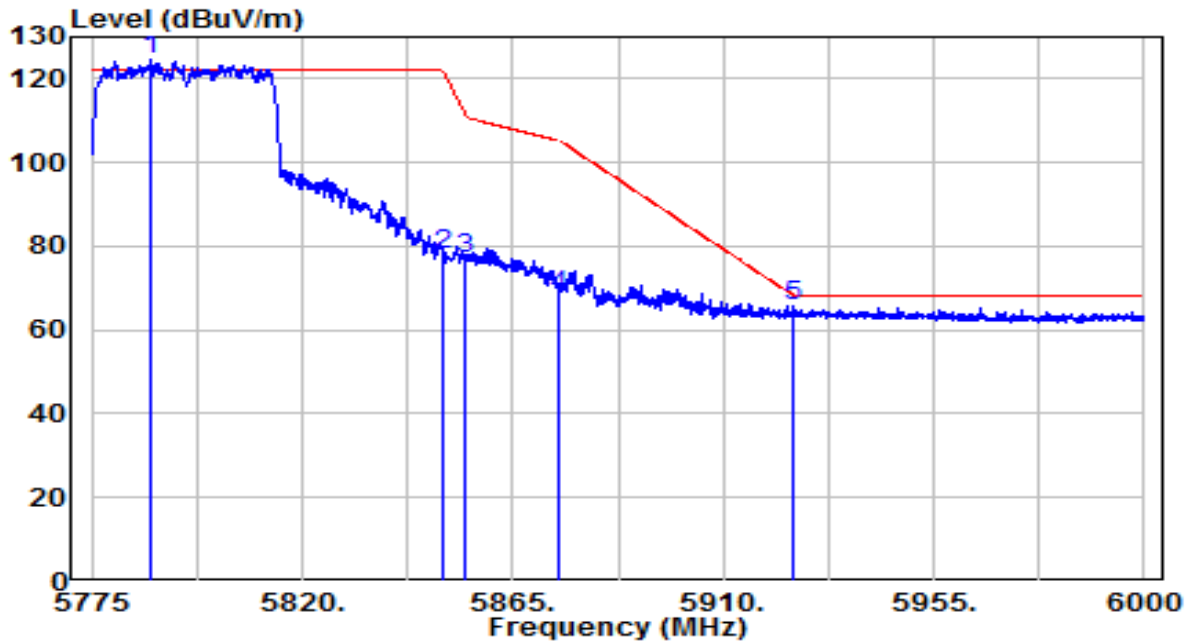


No		Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	*	5787.375	103.19	21.20	124.39	N/A	N/A	Peak
2		5850.000	56.74	21.40	78.14	-44.06	122.20	Peak
3		5855.000	55.53	21.42	76.95	-33.85	110.80	Peak
4		5875.000	46.85	21.49	68.34	-36.86	105.20	Peak
5		5925.000	44.06	21.65	65.70	-2.50	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6000 次世代 Wi-Fi 路由器	Date of Test	2021-06-27
Factor	BBHA 9120D	Temp. / Humidity	24.4°C/37%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE80 at Channel 5210MHz	Test Voltage	AC 110V/60Hz

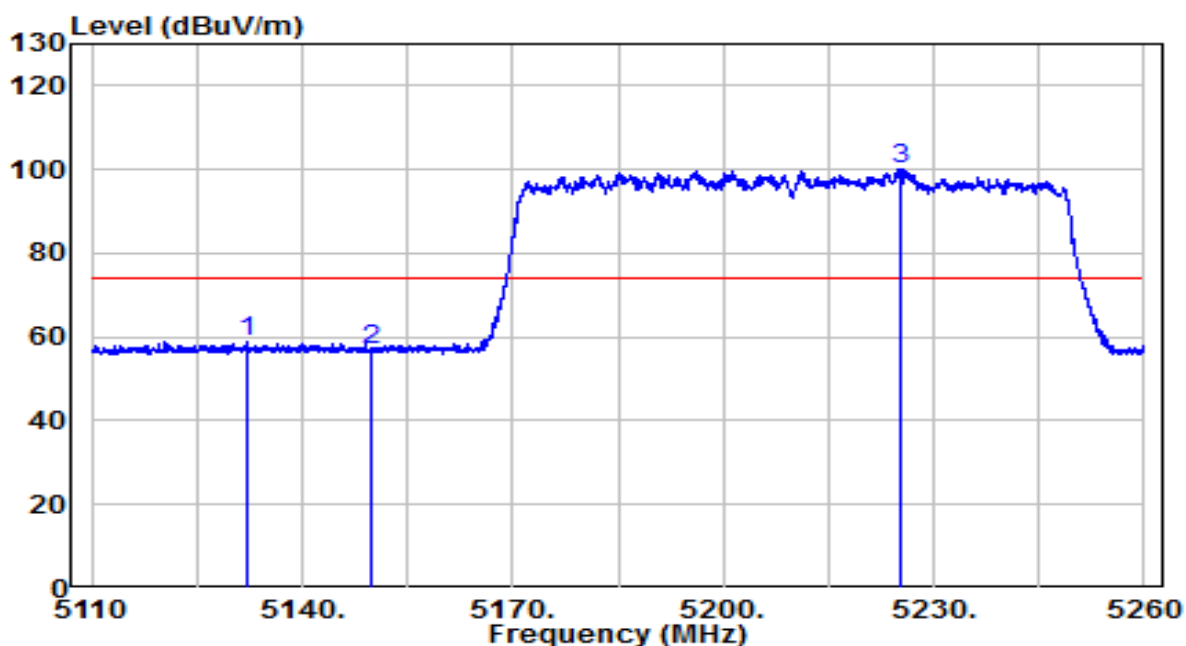


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5132.125	38.85	19.89	58.74	-15.26	74.00	Peak
2	5149.975	36.81	19.91	56.71	-17.29	74.00	Peak
3	* 5225.200	80.01	19.98	99.99	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6000 次世代 Wi-Fi 路由器	Date of Test	2021-06-27
Factor	BBHA 9120D	Temp. / Humidity	24.4°C/37%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE80 at Channel 5210MHz	Test Voltage	AC 110V/60Hz

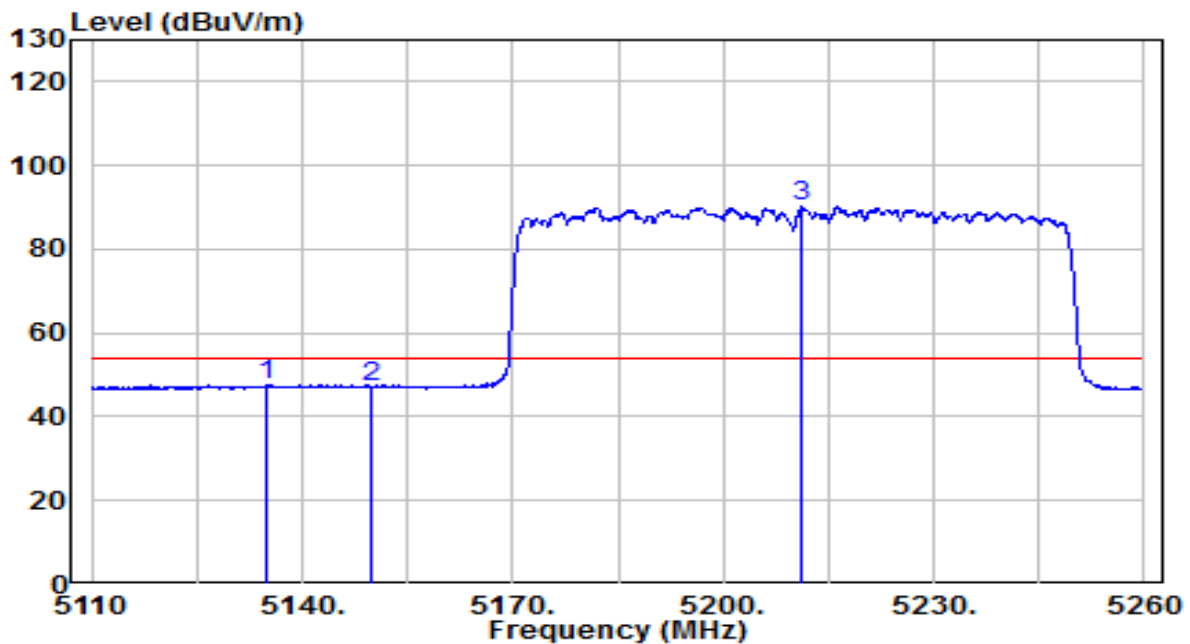


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5135.050	27.79	19.89	47.68	-6.32	54.00	Average
2	5149.975	27.09	19.91	46.99	-7.01	54.00	Average
3	* 5211.175	70.21	19.97	90.18	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6000 次世代 Wi-Fi 路由器	Date of Test	2021-06-27
Factor	BBHA 9120D	Temp. / Humidity	24.4°C/37%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE80 at Channel 5210MHz	Test Voltage	AC 110V/60Hz

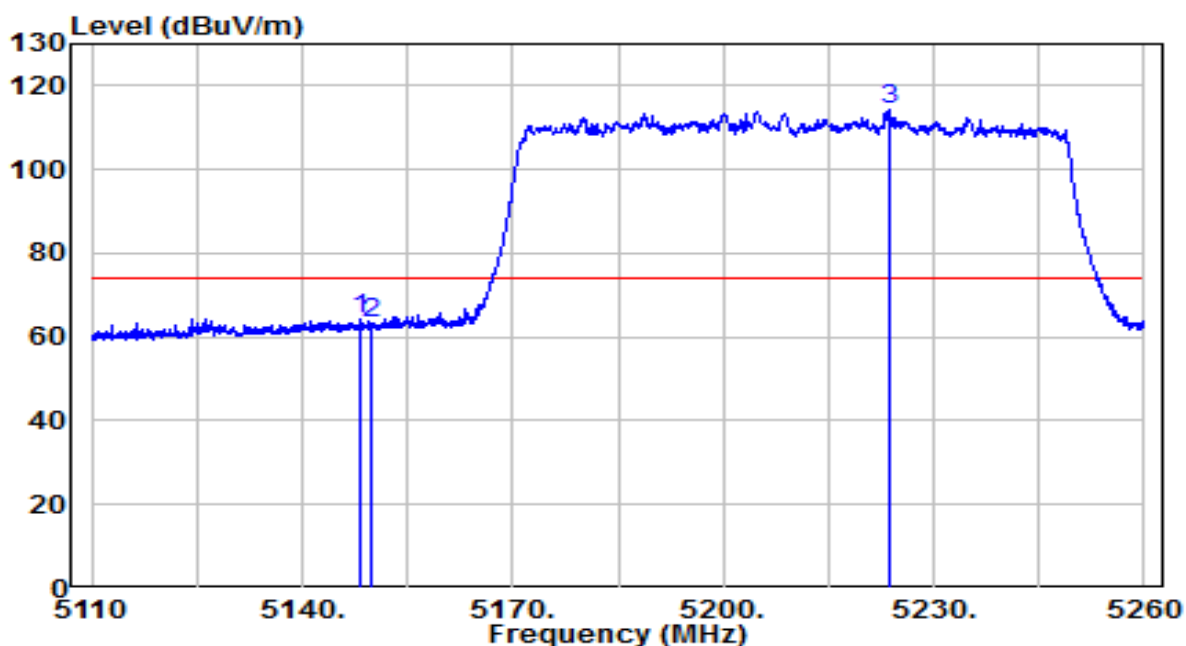


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5148.325	44.32	19.90	64.22	-9.78	74.00	Peak
2	5149.975	43.34	19.91	63.24	-10.76	74.00	Peak
3	* 5223.550	94.20	19.98	114.18	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6000 次世代 Wi-Fi 路由器	Date of Test	2021-06-27
Factor	BBHA 9120D	Temp. / Humidity	24.4°C/37%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE80 at Channel 5210MHz	Test Voltage	AC 110V/60Hz

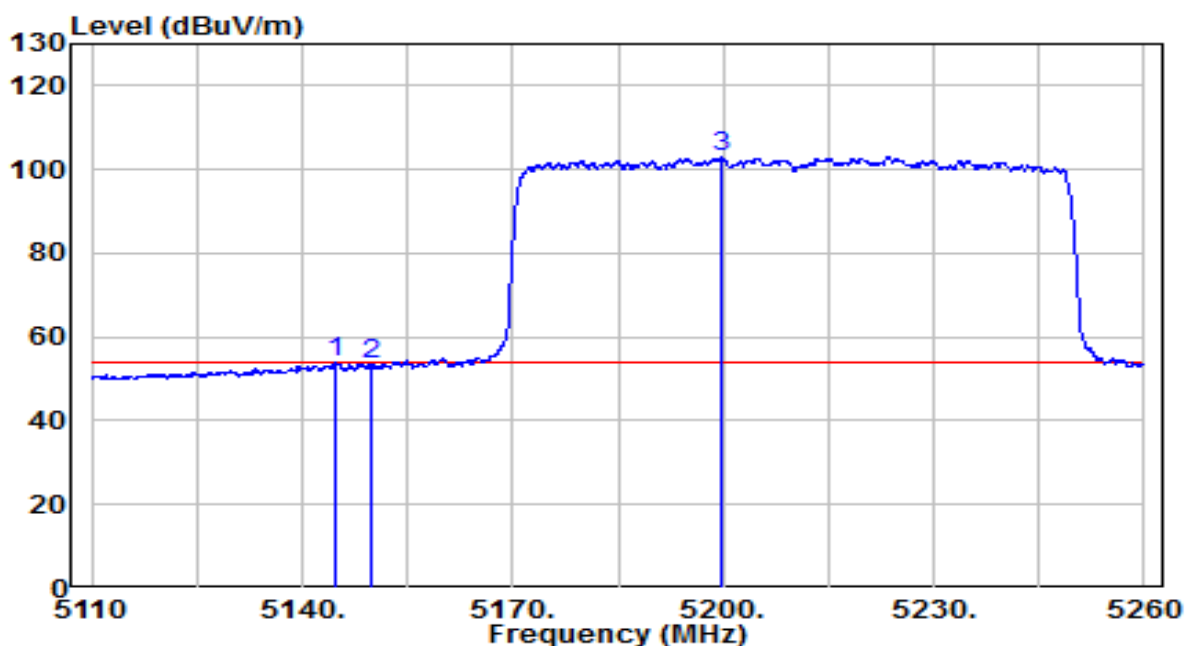


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5144.725	33.94	19.90	53.84	-0.16	54.00	Average
2	5150.000	33.57	19.91	53.48	-0.52	54.00	Average
3	* 5199.850	82.89	19.96	102.85	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6000 次世代 Wi-Fi 路由器	Date of Test	2021-06-27
Factor	BBHA 9120D	Temp. / Humidity	24.4°C/37%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE80 at Channel 5290MHz	Test Voltage	AC 110V/60Hz

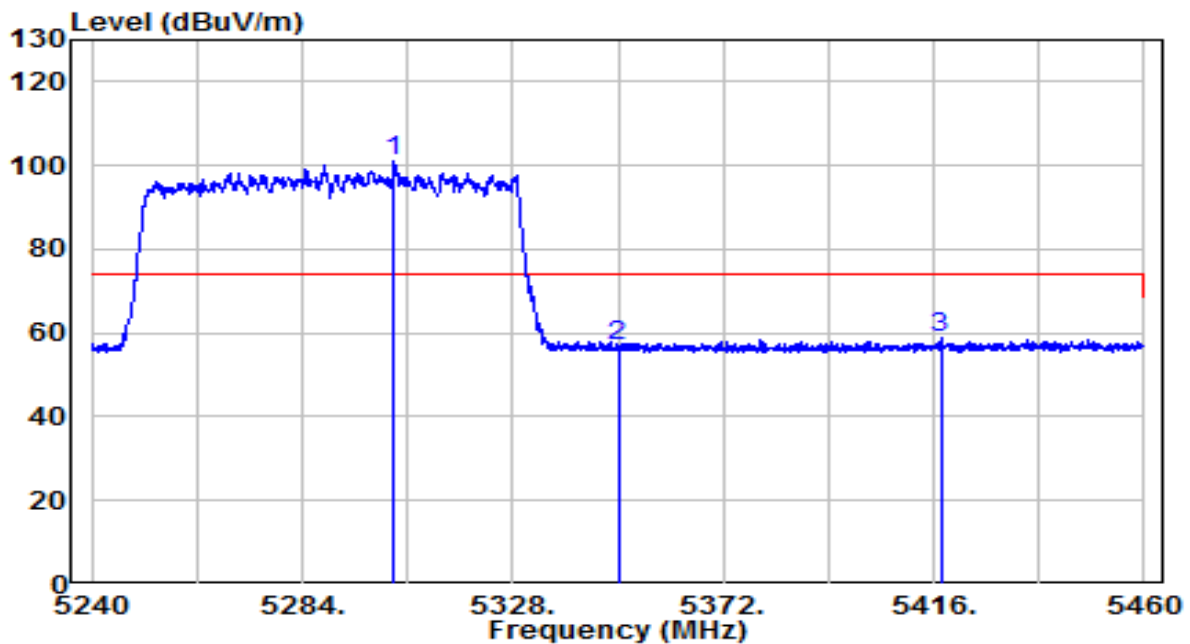


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5303.140	80.77	20.07	100.83	N/A	N/A	Peak
2		5350.000	36.72	20.11	56.83	-17.17	74.00	Peak
3		5417.430	38.69	20.18	58.87	-15.13	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6000 次世代 Wi-Fi 路由器	Date of Test	2021-06-27
Factor	BBHA 9120D	Temp. / Humidity	24.4°C/37%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE80 at Channel 5290MHz	Test Voltage	AC 110V/60Hz

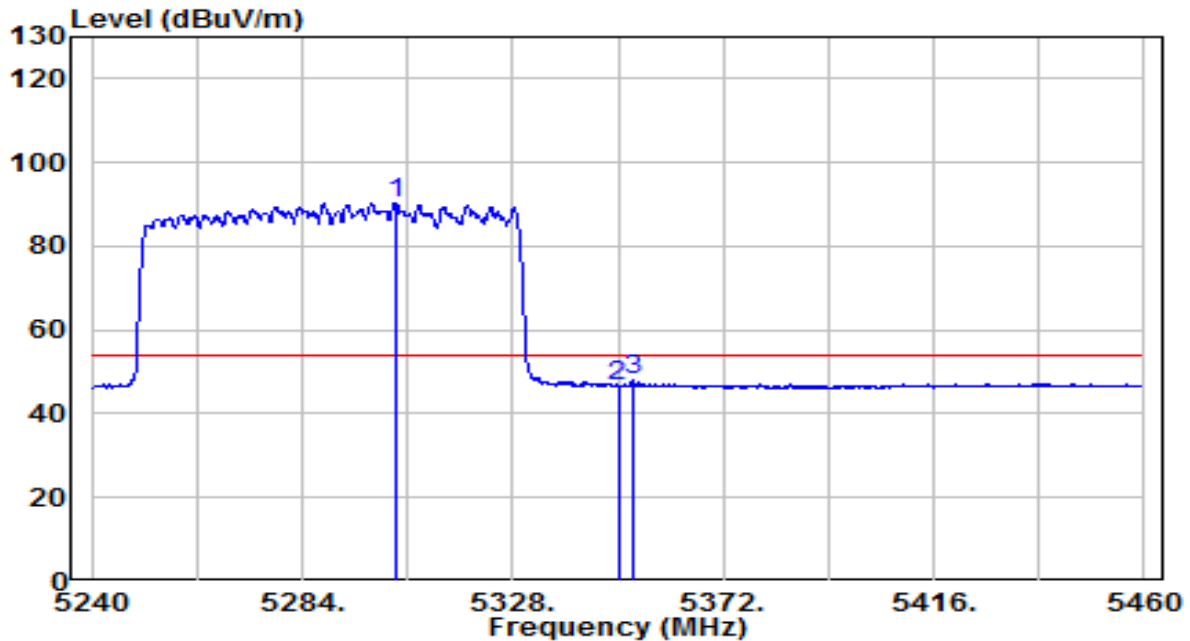


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5303.470	70.29	20.07	90.36	N/A	N/A	Average
2		5350.000	26.55	20.11	46.66	-7.34	54.00	Average
3		5353.190	27.77	20.12	47.89	-6.11	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6000 次世代 Wi-Fi 路由器	Date of Test	2021-06-27
Factor	BBHA 9120D	Temp. / Humidity	24.4°C/37%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE80 at Channel 5290MHz	Test Voltage	AC 110V/60Hz

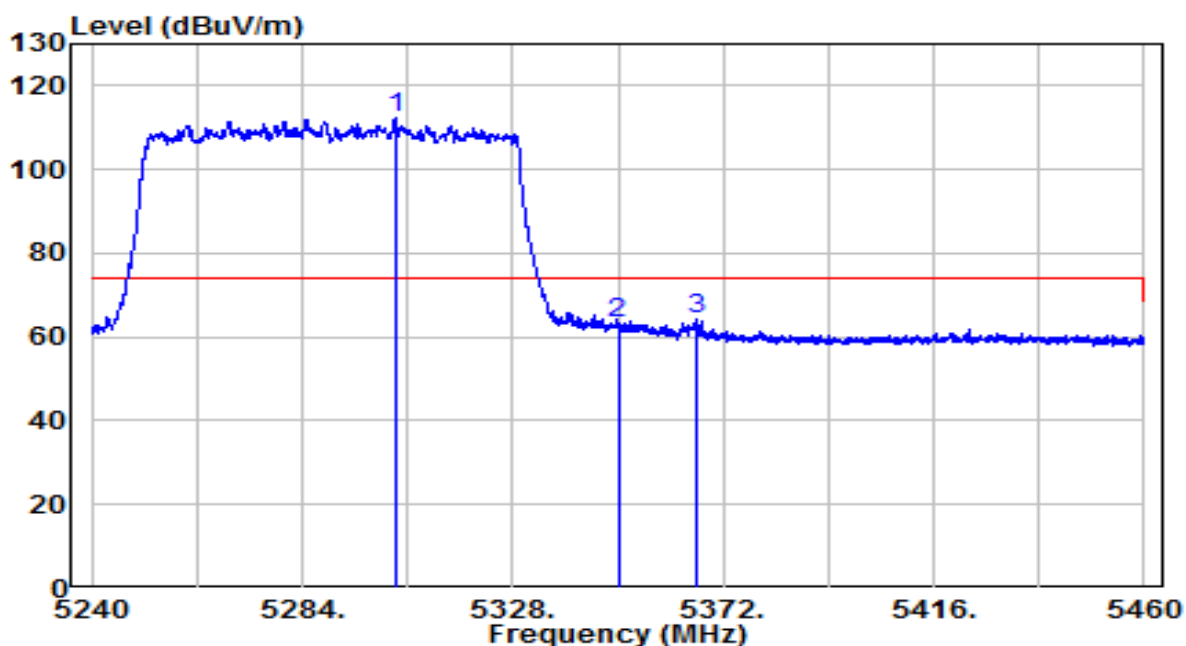


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5303.360	92.07	20.07	112.14	N/A	N/A	Peak
2		5350.000	43.32	20.11	63.43	-10.57	74.00	Peak
3		5366.610	44.23	20.13	64.36	-9.64	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6000 次世代 Wi-Fi 路由器	Date of Test	2021-06-27
Factor	BBHA 9120D	Temp. / Humidity	24.4°C/37%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE80 at Channel 5290MHz	Test Voltage	AC 110V/60Hz

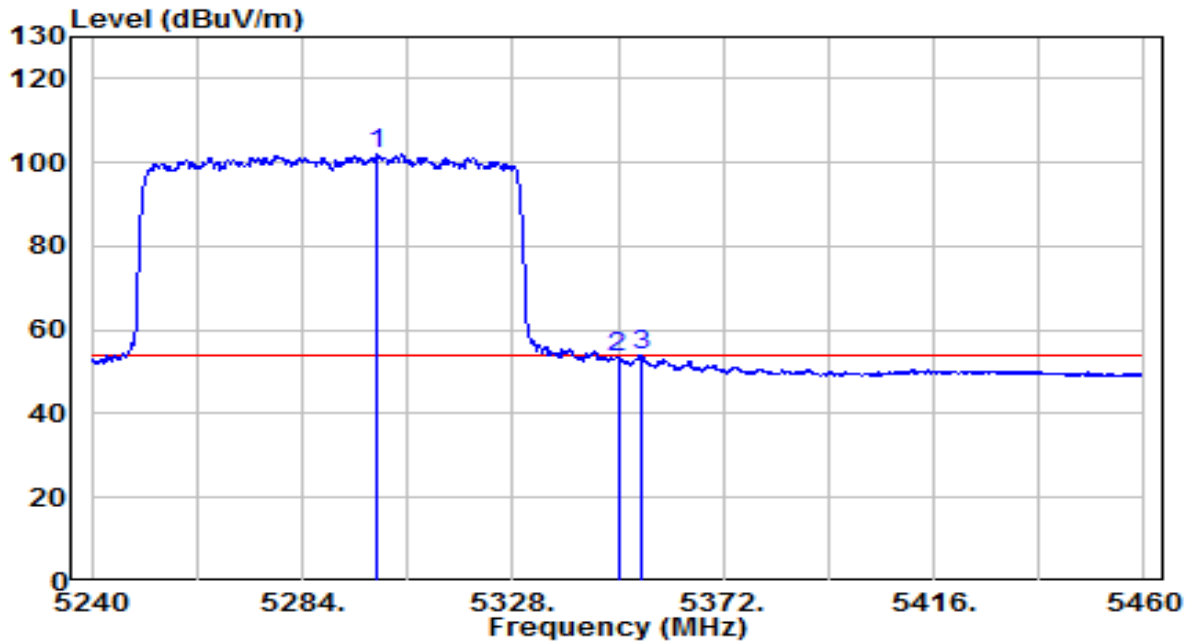


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5299.730	81.80	20.06	101.86	N/A	N/A	Average
2		5350.000	33.46	20.11	53.57	-0.43	54.00	Average
3		5354.730	33.65	20.12	53.77	-0.23	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6000 次世代 Wi-Fi 路由器	Date of Test	2021-06-27
Factor	BBHA 9120D	Temp. / Humidity	24.4°C/37%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE80 at Channel 5530MHz	Test Voltage	AC 110V/60Hz

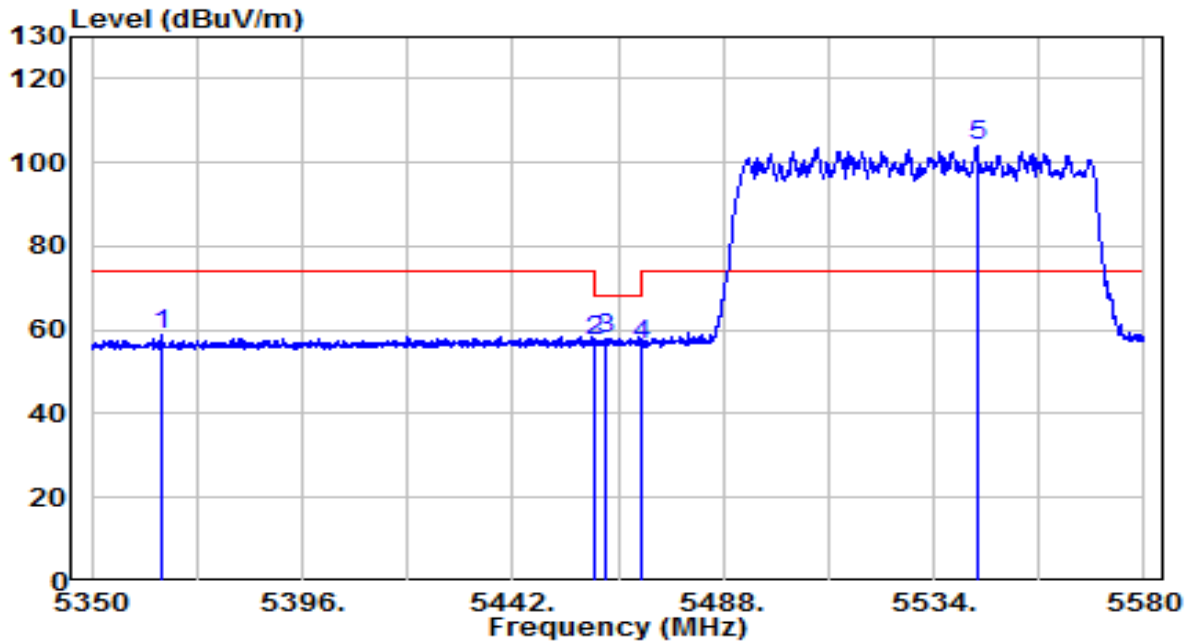


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5365.295	38.72	20.13	58.85	-15.15	74.00	Peak
2	5460.055	37.21	20.23	57.44	-10.76	68.20	Peak
3	5462.470	37.88	20.23	58.11	-10.09	68.20	Peak
4	5470.000	36.34	20.24	56.58	-11.63	68.20	Peak
5	* 5543.430	83.74	20.41	104.15	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6000 次世代 Wi-Fi 路由器	Date of Test	2021-06-27
Factor	BBHA 9120D	Temp. / Humidity	24.4°C/37%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE80 at Channel 5530MHz	Test Voltage	AC 110V/60Hz

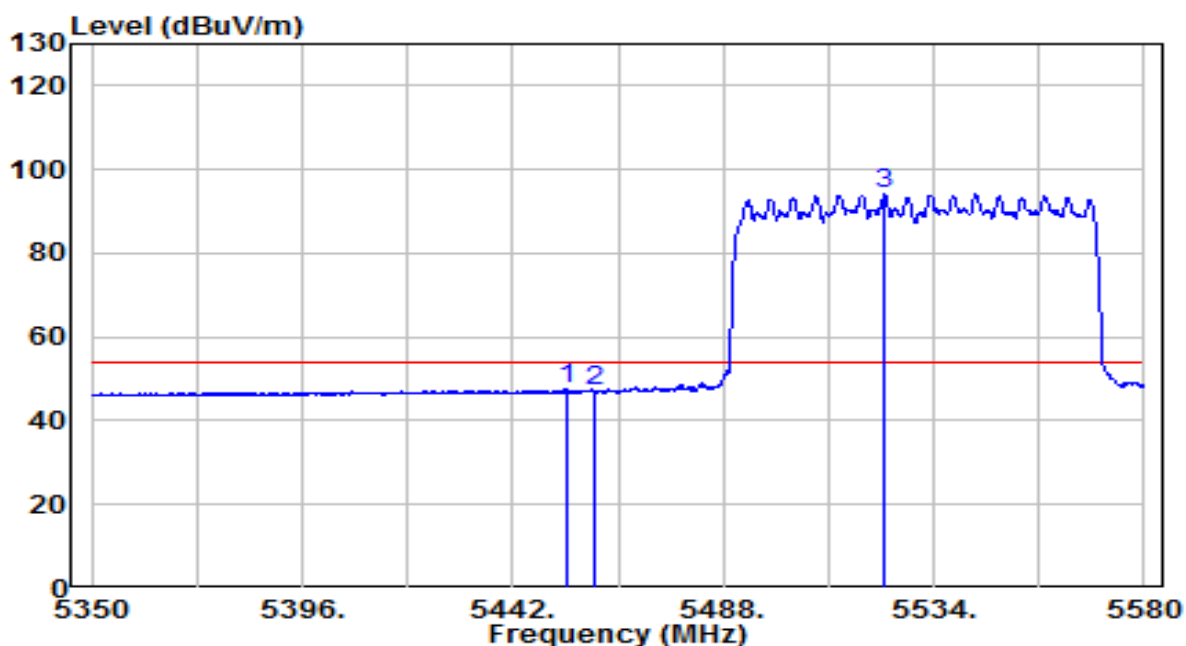


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5453.960	27.19	20.22	47.41	-6.59	54.00	Average
2	5460.055	26.67	20.23	46.90	-7.10	54.00	Average
3	* 5523.305	73.68	20.35	94.02	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6000 次世代 Wi-Fi 路由器	Date of Test	2021-06-27
Factor	BBHA 9120D	Temp. / Humidity	24.4°C/37%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE80 at Channel 5530MHz	Test Voltage	AC 110V/60Hz

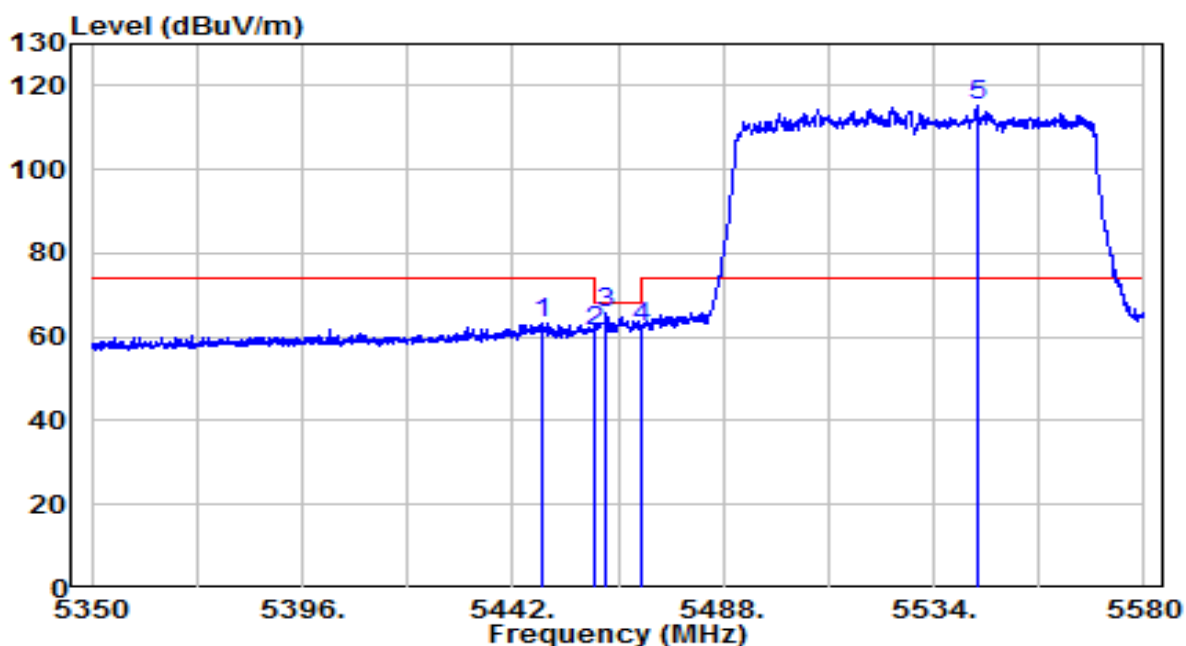


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5448.210	43.11	20.22	63.32	-10.68	74.00	Peak
2	5460.055	41.14	20.23	61.36	-6.84	68.20	Peak
3	5462.240	45.53	20.23	65.76	-2.44	68.20	Peak
4	5470.000	42.12	20.24	62.36	-5.84	68.20	Peak
5	* 5543.430	94.73	20.41	115.15	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6000 次世代 Wi-Fi 路由器	Date of Test	2021-06-27
Factor	BBHA 9120D	Temp. / Humidity	24.4°C/37%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE80 at Channel 5530MHz	Test Voltage	AC 110V/60Hz

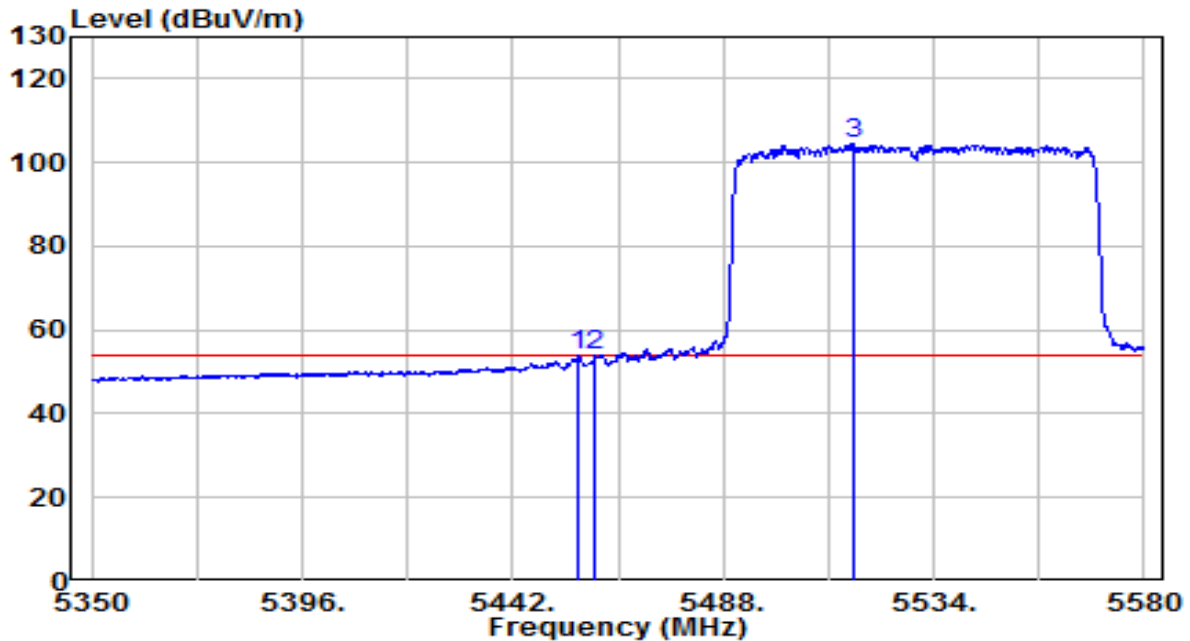


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5456.260	33.57	20.22	53.79	-0.21	54.00	Average
2	5460.055	33.54	20.23	53.76	-0.24	54.00	Average
3	* 5516.290	84.25	20.32	104.57	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6000 次世代 Wi-Fi 路由器	Date of Test	2021-06-27
Factor	BBHA 9120D	Temp. / Humidity	24.4°C/37%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE80 at Channel 5610MHz	Test Voltage	AC 110V/60Hz

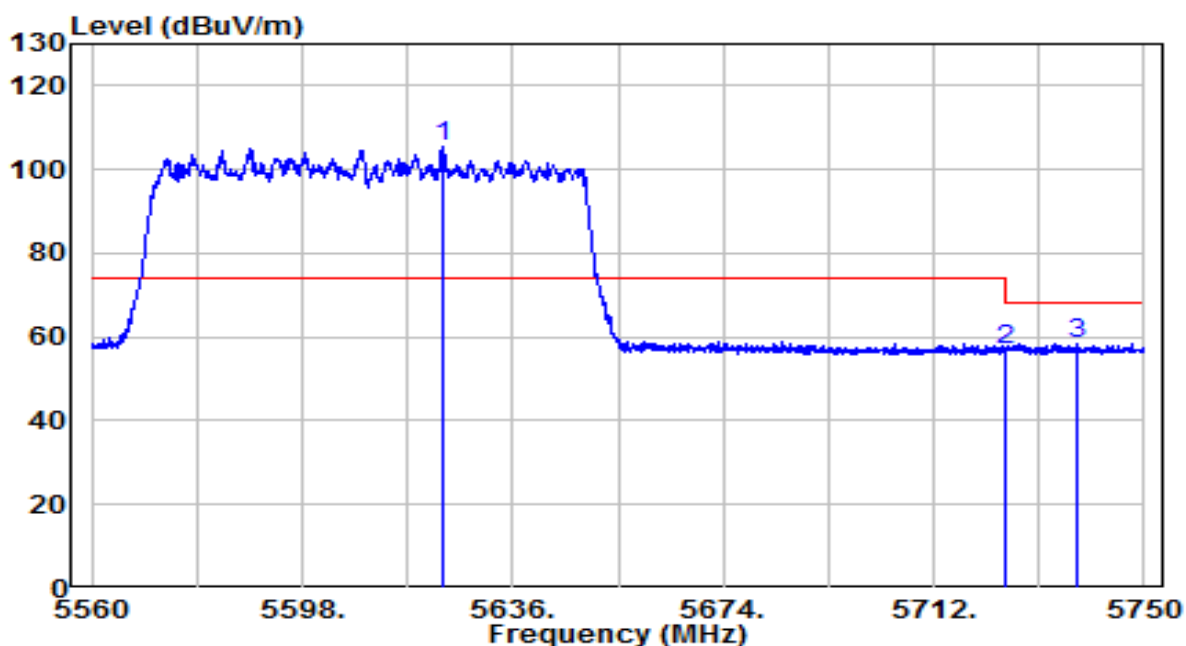


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5623.365	84.57	20.67	105.24	N/A	N/A	Peak
2		5725.015	36.04	21.00	57.04	-11.16	68.20	Peak
3		5738.030	37.56	21.04	58.61	-9.59	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6000 次世代 Wi-Fi 路由器	Date of Test	2021-06-27
Factor	BBHA 9120D	Temp. / Humidity	24.4°C/37%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE80 at Channel 5610MHz	Test Voltage	AC 110V/60Hz

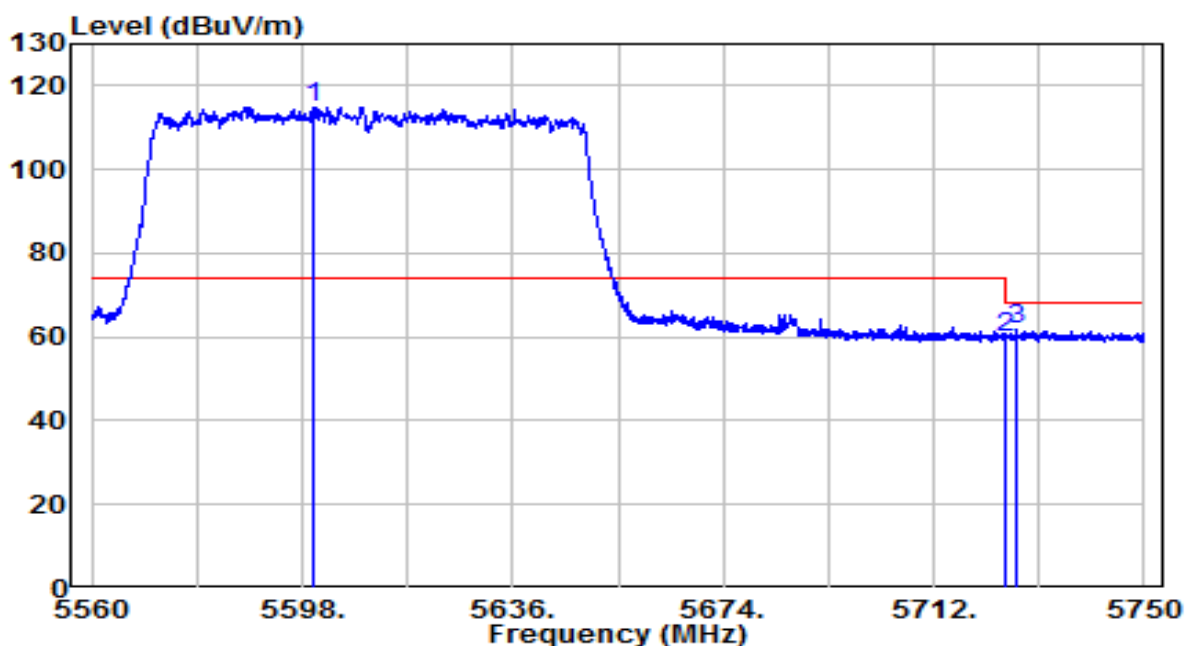


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5600.090	94.38	20.59	114.98	N/A	N/A	Peak
2		5725.000	39.04	21.00	60.04	-8.16	68.20	Peak
3		5727.010	40.72	21.01	61.73	-6.47	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6000 次世代 Wi-Fi 路由器	Date of Test	2021-06-27
Factor	BBHA 9120D	Temp. / Humidity	24.4°C/37%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE80 at Channel 5775MHz	Test Voltage	AC 110V/60Hz

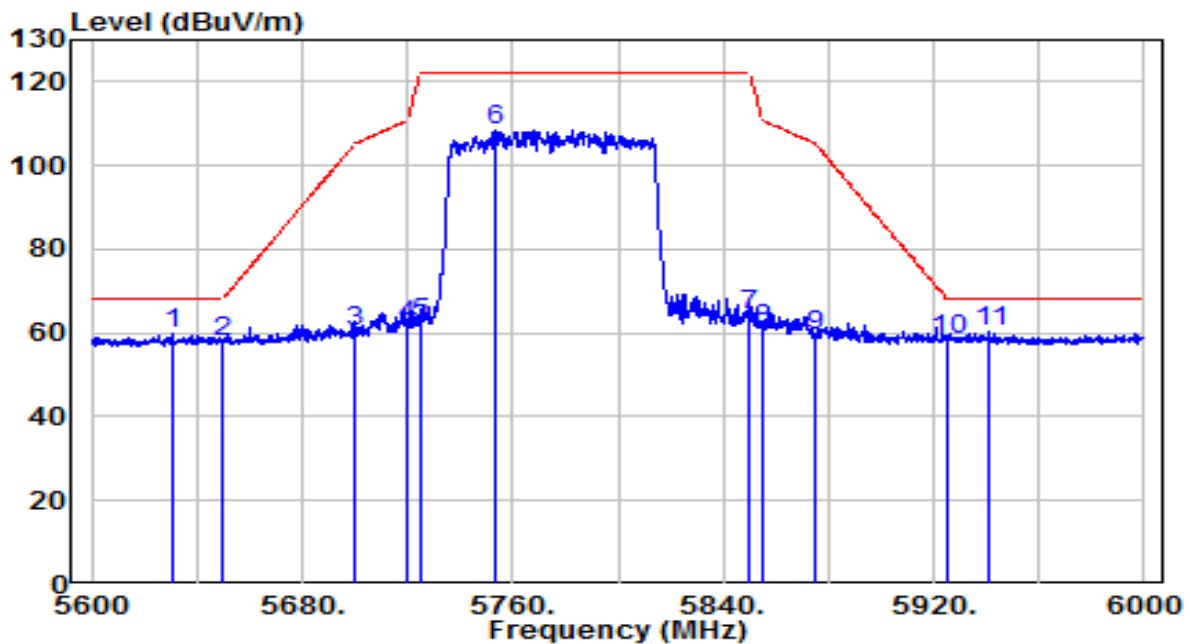


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5630.400	38.93	20.69	59.62	-8.58	68.20	Peak
2	5650.000	37.34	20.76	58.10	-10.10	68.20	Peak
3	5700.000	39.63	20.92	60.54	-44.66	105.20	Peak
4	5720.000	40.76	20.98	61.74	-49.06	110.80	Peak
5	5725.000	41.39	21.00	62.39	-59.81	122.20	Peak
6	5753.800	87.56	21.09	108.65	N/A	N/A	Peak
7	5850.000	42.65	21.40	64.05	-58.15	122.20	Peak
8	5855.000	39.41	21.42	60.83	-49.97	110.80	Peak
9	5875.000	37.75	21.49	59.23	-45.97	105.20	Peak
10	5925.000	36.61	21.65	58.26	-9.94	68.20	Peak
11	* 5941.400	38.41	21.70	60.11	-8.09	68.20	Peak

Note:

1. " *", means this data is the worst emission level.

2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6000 次世代 Wi-Fi 路由器	Date of Test	2021-06-27
Factor	BBHA 9120D	Temp. / Humidity	24.4°C/37%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE80 at Channel 5775MHz	Test Voltage	AC 110V/60Hz

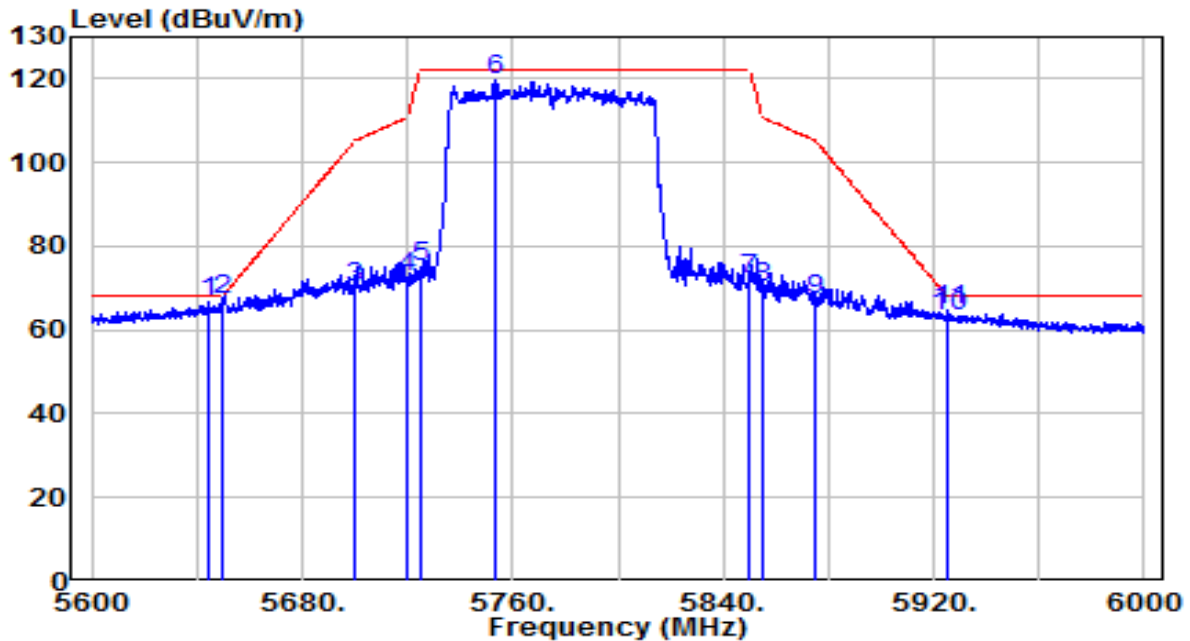


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	5644.000	46.01	20.74	66.74	-1.46	68.20	Peak
2	* 5650.000	46.55	20.76	67.31	-0.89	68.20	Peak
3	5700.000	49.24	20.92	70.16	-35.04	105.20	Peak
4	5720.000	51.65	20.98	72.63	-38.17	110.80	Peak
5	5725.000	53.86	21.00	74.86	-47.34	122.20	Peak
6	5753.800	98.64	21.09	119.73	N/A	N/A	Peak
7	5850.000	50.63	21.40	72.04	-50.16	122.20	Peak
8	5855.000	48.82	21.42	70.24	-40.56	110.80	Peak
9	5875.000	45.78	21.49	67.26	-37.94	105.20	Peak
10	5925.000	41.43	21.65	63.08	-5.12	68.20	Peak
11	5925.600	43.06	21.65	64.71	-3.49	68.20	Peak

Note:

1. " *", means this data is the worst emission level.

2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6000 次世代 Wi-Fi 路由器	Date of Test	2021-06-27
Factor	BBHA 9120D	Temp. / Humidity	24.4°C/37%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE160 at Channel 5250MHz	Test Voltage	AC 110V/60Hz

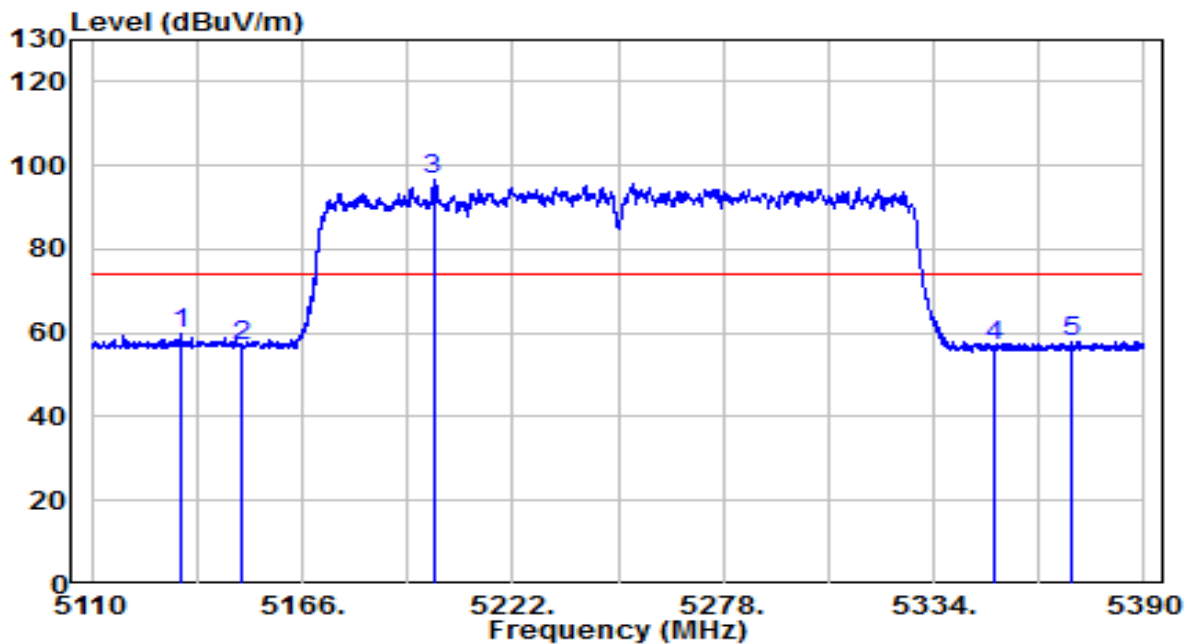


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5133.800	40.07	19.89	59.96	-14.04	74.00	Peak
2	5150.040	37.08	19.91	56.99	-17.01	74.00	Peak
3	* 5200.860	76.55	19.96	96.51	N/A	N/A	Peak
4	5350.000	36.90	20.11	57.02	-16.98	74.00	Peak
5	5370.540	37.87	20.14	58.00	-16.00	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6000 次世代 Wi-Fi 路由器	Date of Test	2021-06-27
Factor	BBHA 9120D	Temp. / Humidity	24.4°C/37%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE160 at Channel 5250MHz	Test Voltage	AC 110V/60Hz

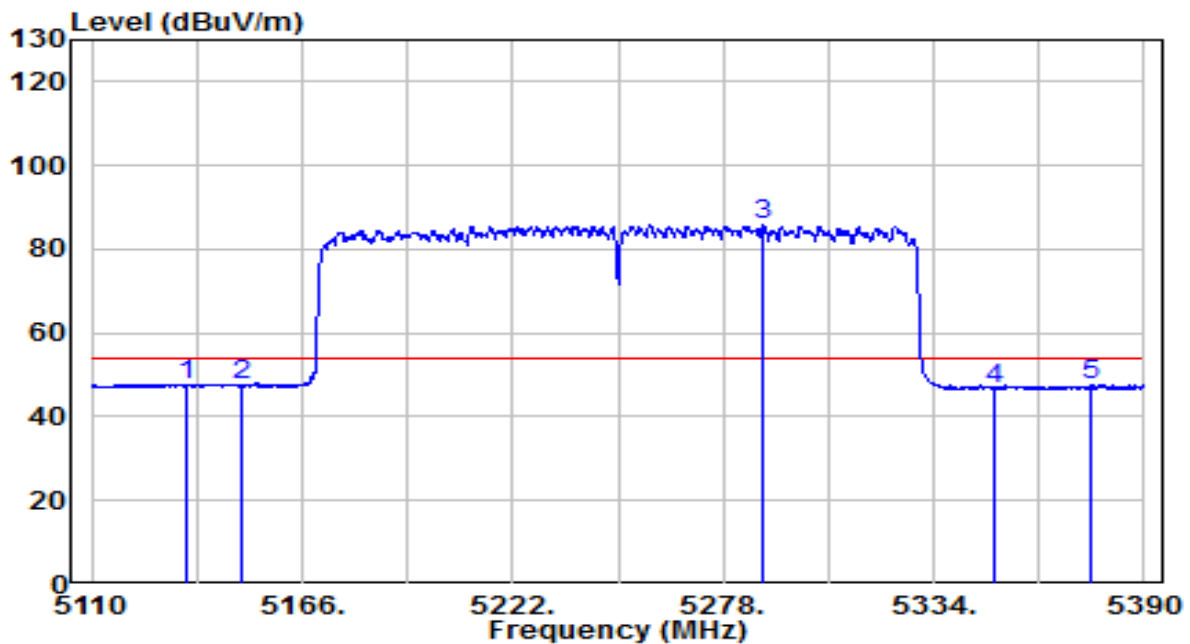


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5135.340	27.90	19.89	47.79	-6.21	54.00	Average
2	5150.000	27.45	19.91	47.35	-6.65	54.00	Average
3	* 5288.360	65.68	20.05	85.73	N/A	N/A	Average
4	5350.000	26.52	20.11	46.64	-7.36	54.00	Average
5	5375.860	27.48	20.14	47.62	-6.38	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6000 次世代 Wi-Fi 路由器	Date of Test	2021-06-27
Factor	BBHA 9120D	Temp. / Humidity	24.4°C/37%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE160 at Channel 5250MHz	Test Voltage	AC 110V/60Hz

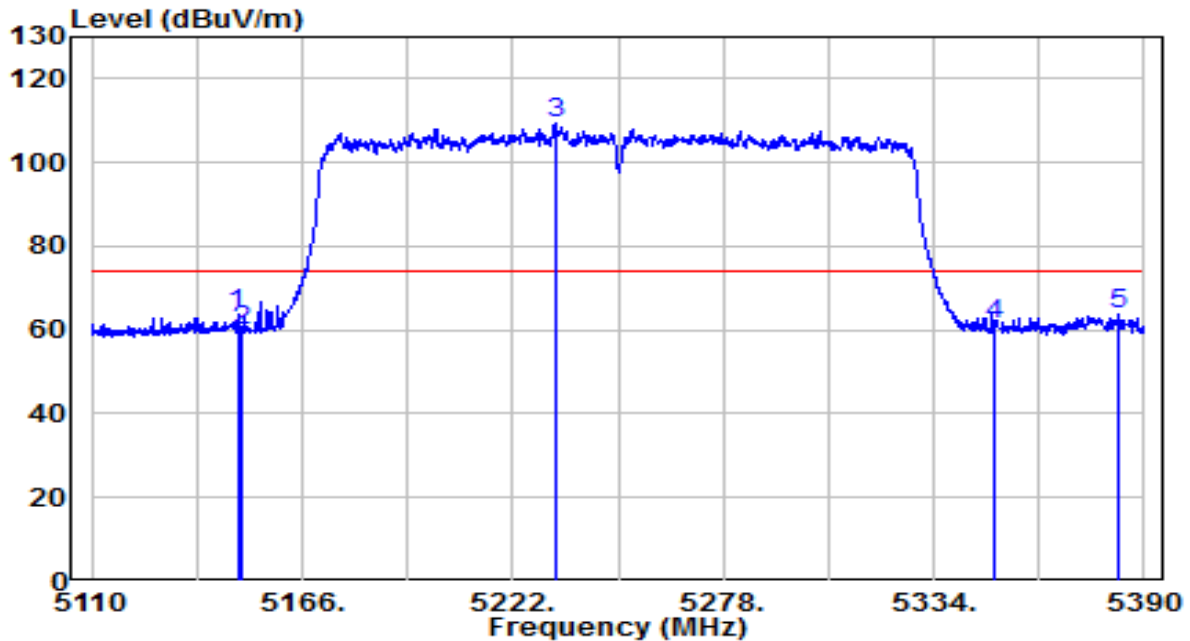


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5148.780	43.86	19.90	63.77	-10.23	74.00	Peak
2	5150.040	39.99	19.91	59.90	-14.10	74.00	Peak
3	* 5233.200	89.21	19.99	109.20	N/A	N/A	Peak
4	5350.000	41.36	20.11	61.47	-12.53	74.00	Peak
5	5383.000	43.54	20.15	63.69	-10.31	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6000 次世代 Wi-Fi 路由器	Date of Test	2021-06-27
Factor	BBHA 9120D	Temp. / Humidity	24.4°C/37%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE160 at Channel 5250MHz	Test Voltage	AC 110V/60Hz

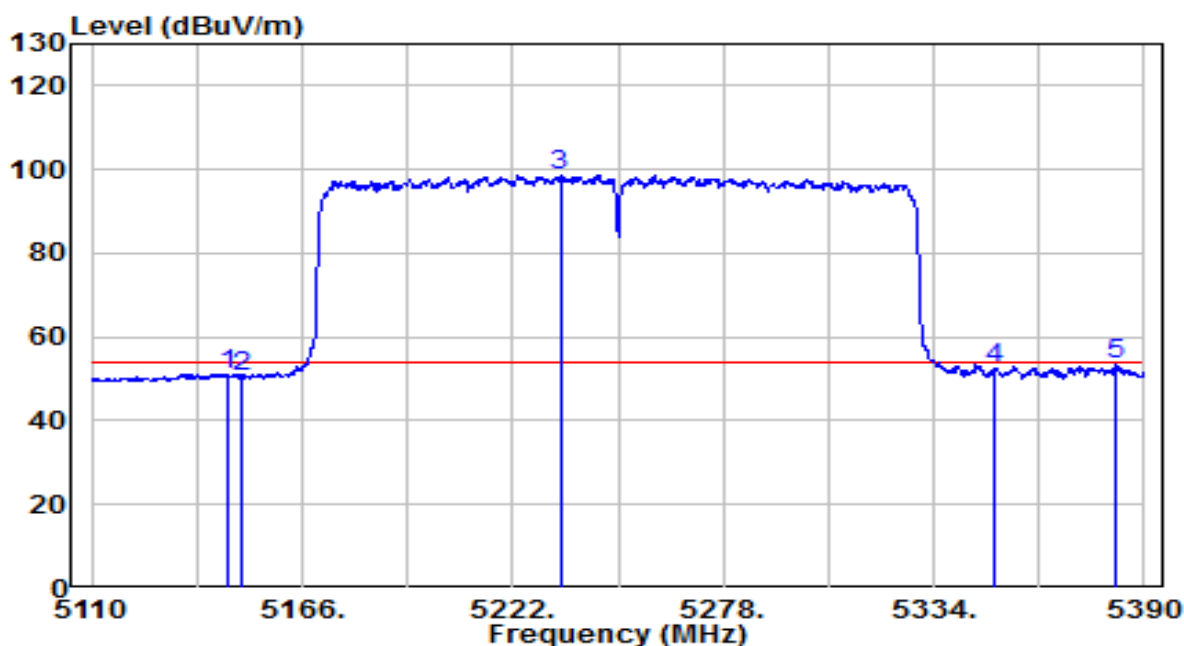


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5146.120	31.29	19.90	51.20	-2.80	54.00	Average
2	5150.000	30.75	19.91	50.66	-3.34	54.00	Average
3	* 5234.600	78.70	19.99	98.70	N/A	N/A	Average
4	5350.000	32.30	20.11	52.41	-1.59	54.00	Average
5	5382.580	33.49	20.15	53.63	-0.37	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6000 次世代 Wi-Fi 路由器	Date of Test	2021-06-27
Factor	BBHA 9120D	Temp. / Humidity	24.4°C/37%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE160 at Channel 5570MHz	Test Voltage	AC 110V/60Hz

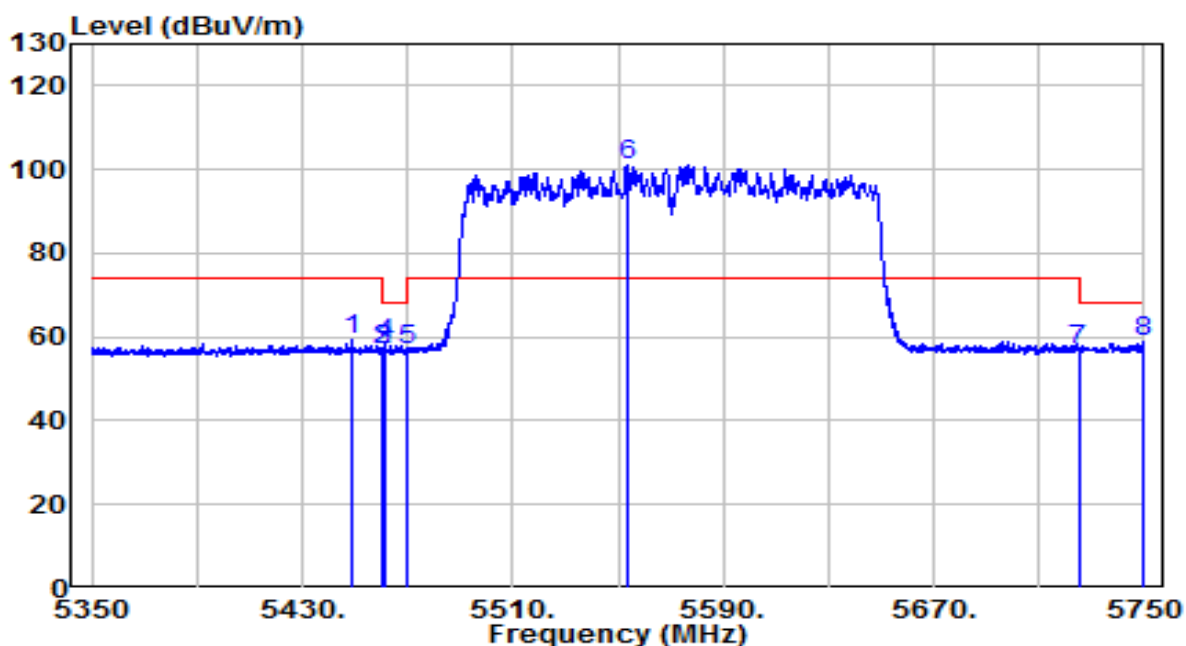


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5449.000	39.26	20.22	59.48	-14.52	74.00	Peak
2	5460.000	36.51	20.23	56.74	-11.46	68.20	Peak
3	5460.000	36.51	20.23	56.74	-11.46	68.20	Peak
4	5461.000	38.05	20.23	58.28	-9.92	68.20	Peak
5	5470.000	36.80	20.24	57.04	-11.16	68.20	Peak
6	* 5553.600	80.80	20.44	101.24	N/A	N/A	Peak
7	5725.000	35.75	21.00	56.75	-11.45	68.20	Peak
8	5749.800	37.73	21.08	58.81	-9.39	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6000 次世代 Wi-Fi 路由器	Date of Test	2021-06-27
Factor	BBHA 9120D	Temp. / Humidity	24.4°C/37%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE160 at Channel 5570MHz	Test Voltage	AC 110V/60Hz

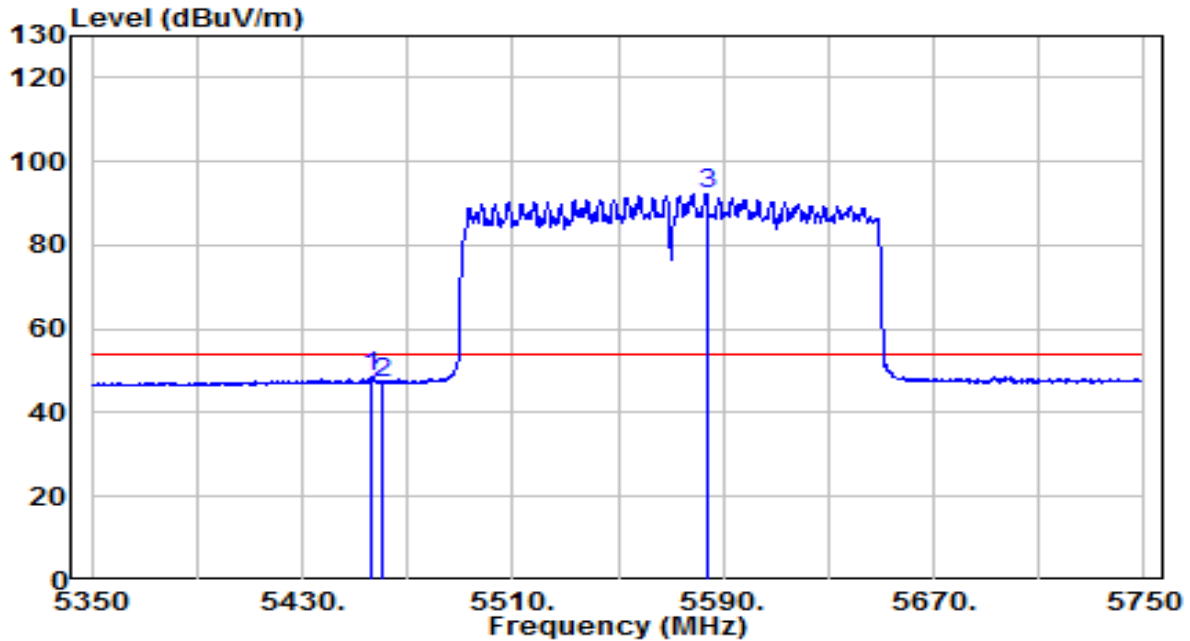


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5455.800	28.34	20.22	48.56	-5.44	54.00	Average
2	5460.000	26.93	20.23	47.16	-6.84	54.00	Average
3	* 5583.600	71.81	20.54	92.35	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6000 次世代 Wi-Fi 路由器	Date of Test	2021-06-27
Factor	BBHA 9120D	Temp. / Humidity	24.4°C/37%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE160 at Channel 5570MHz	Test Voltage	AC 110V/60Hz

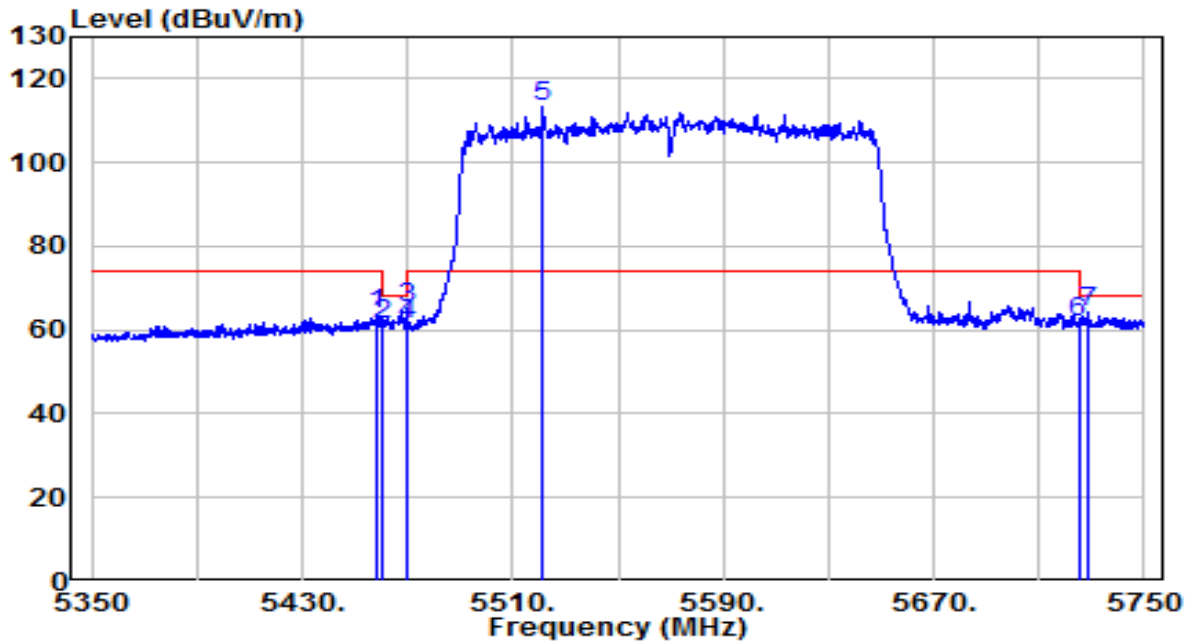


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5458.600	43.55	20.23	63.78	-10.22	74.00	Peak
2	5460.000	41.27	20.23	61.50	-6.70	68.20	Peak
3	5469.400	45.14	20.24	65.38	-2.82	68.20	Peak
4	5470.000	40.90	20.24	61.14	-7.06	68.20	Peak
5 *	5521.600	92.81	20.34	113.15	N/A	N/A	Peak
6	5725.000	40.80	21.00	61.80	-6.40	68.20	Peak
7	5728.800	43.37	21.01	64.38	-3.82	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6000 次世代 Wi-Fi 路由器	Date of Test	2021-06-27
Factor	BBHA 9120D	Temp. / Humidity	24.4°C/37%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE160 at Channel 5570MHz	Test Voltage	AC 110V/60Hz

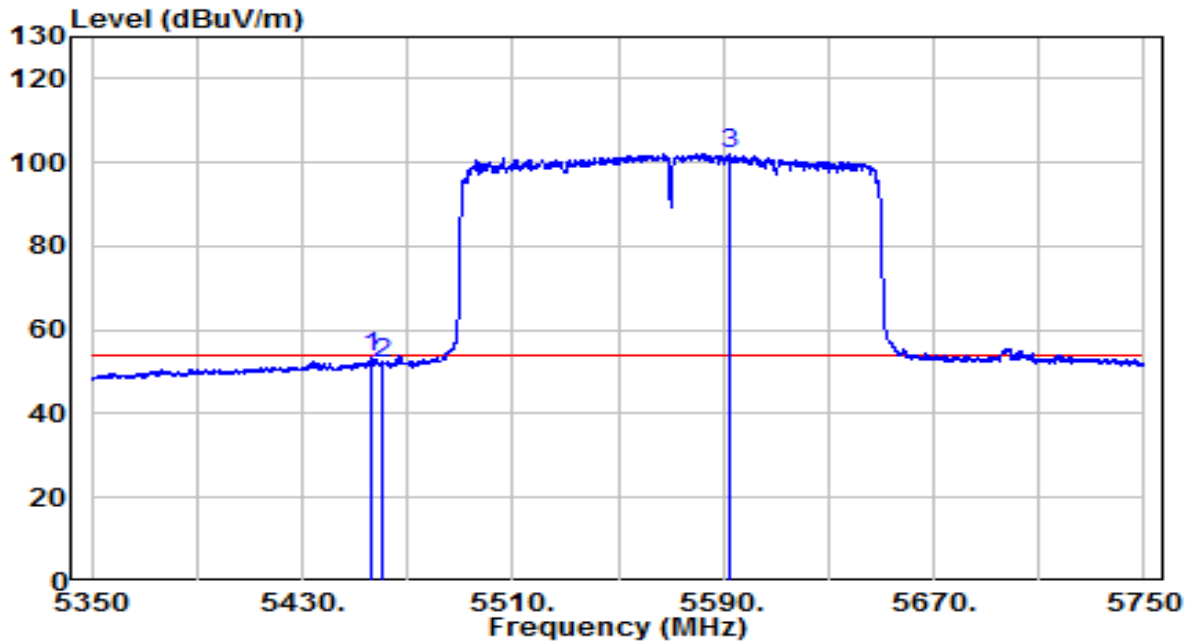

No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5456.000	33.04	20.22	53.26	-0.74	54.00	Average
2	5460.000	31.56	20.23	51.79	-2.21	54.00	Average
3	* 5592.400	81.65	20.57	102.22	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

5.8. 不必要之發射

5.8.1. 適用標準

依據國家通訊傳播委員會低功率射頻器材技術規範之第 5.7.3 節：

在 5.725 GHz~5.850 GHz 的頻段操作之發射器：所有頻帶邊緣向外 5 MHz 內頻率之發射，有效等向輻射功率(EIRP) ≤ 27 dBm/MHz~15.6 dBm/MHz (以線性法計算對應之限制值)；所有頻帶邊緣向外 5 MHz~25 MHz，有效等向輻射功率(EIRP) ≤ 15.6 dBm/MHz~10 dBm/MHz (以線性法計算對應之限制值)；所有頻帶邊緣外 25 MHz~75 MHz，有效等向輻射功率(EIRP) ≤ 10 dBm/MHz~-27 dBm/MHz (以線性法計算對應之限制值)；所有頻帶邊緣外 ≥ 75 MHz 的頻率之發射，有效等向輻射功率(EIRP) ≤ -27 dBm/MHz；

測量不必要發射時，應使用之最低解析頻寬為 1 MHz。必要時，於頻帶邊緣附近可使用小於 1 MHz 之解析頻寬，並以補償方式計算其總值。

當測量不必要發射之限制值時，應將待測物的載波頻率調整到儘可能接近設備設計所允許的上、下頻帶邊緣。

在 1 GHz 以下不必要之發射，應符合 2.8 之規定，任何使用市電為供應電源之設備亦須符合 2.3 之電源線傳導限制值。


不必要發射頻率屬 2.7 規定頻段者，應符合 2.8 之規定。

5.8.2. 量測方法


低頻待測物置於高 80 公分之非導體桌面（落地型產品置於地上），高頻待測物置於高 150 公分之非導體桌面，受測物與配件設備之電源線無須束綁，桌面上受測設備的所有電源線由桌子的後緣垂下沿旋轉桌表面接至交流插座。落地型設備的交流電源線可以方便的型態走線。桌面可 360 度旋轉，接收天線置於距待測物 3m 距離，高度可在 1 至 4 公尺間變動，以量測待測物之最大輻射電場強度。接收天線並應於水準及垂直極化方向各量測一次。

5.8.3. 測試架構圖

Below 1GHz Test Setup:

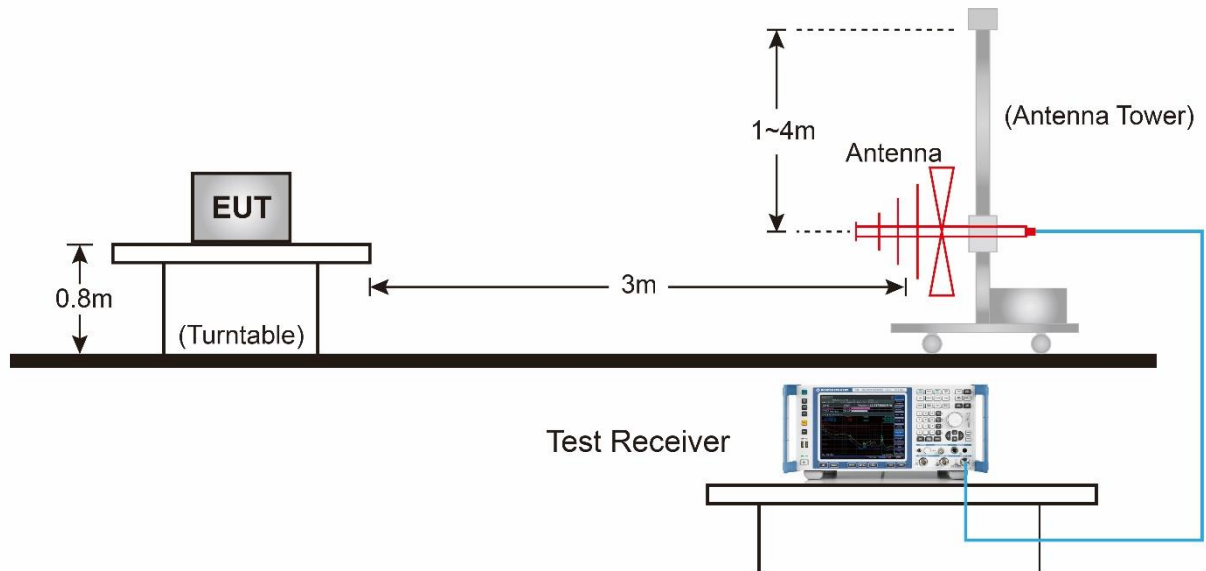


Above 1GHz Test Setup:

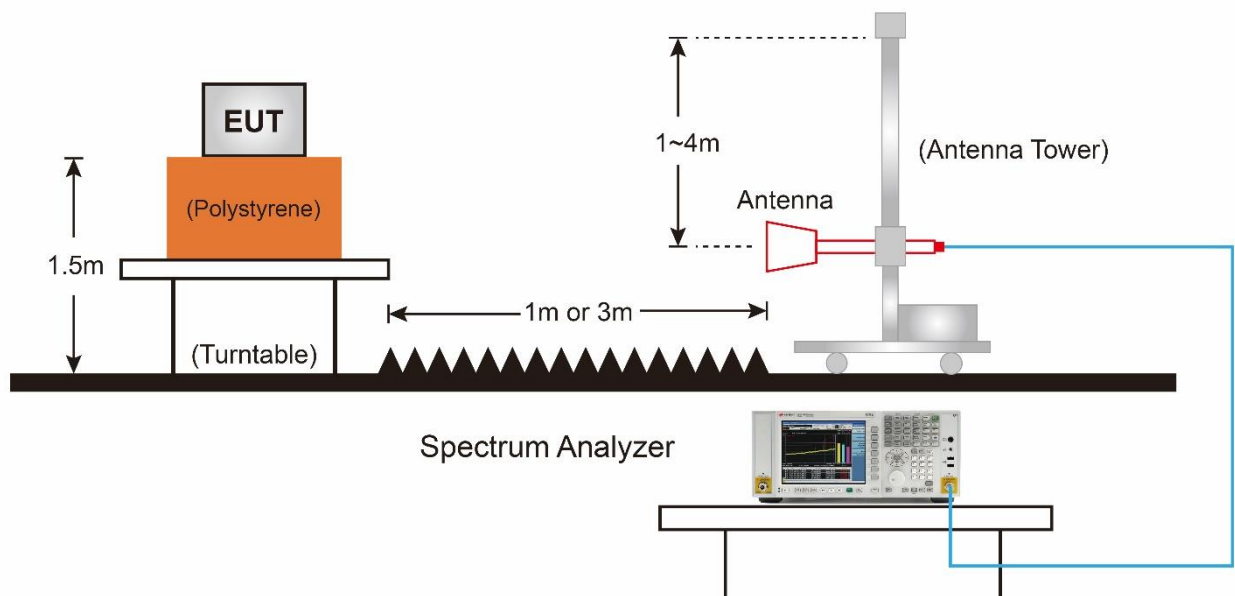

5.8.4. 不必要之發射測試結果

EUT	AX6000 次世代 WI-FI 路由器	Date of Test	2021-06-30
Factor	BBHA 9120D	Temp. / Humidity	24.5°C/35%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11a at Channel 5180MHz	Test Voltage	110V/60Hz

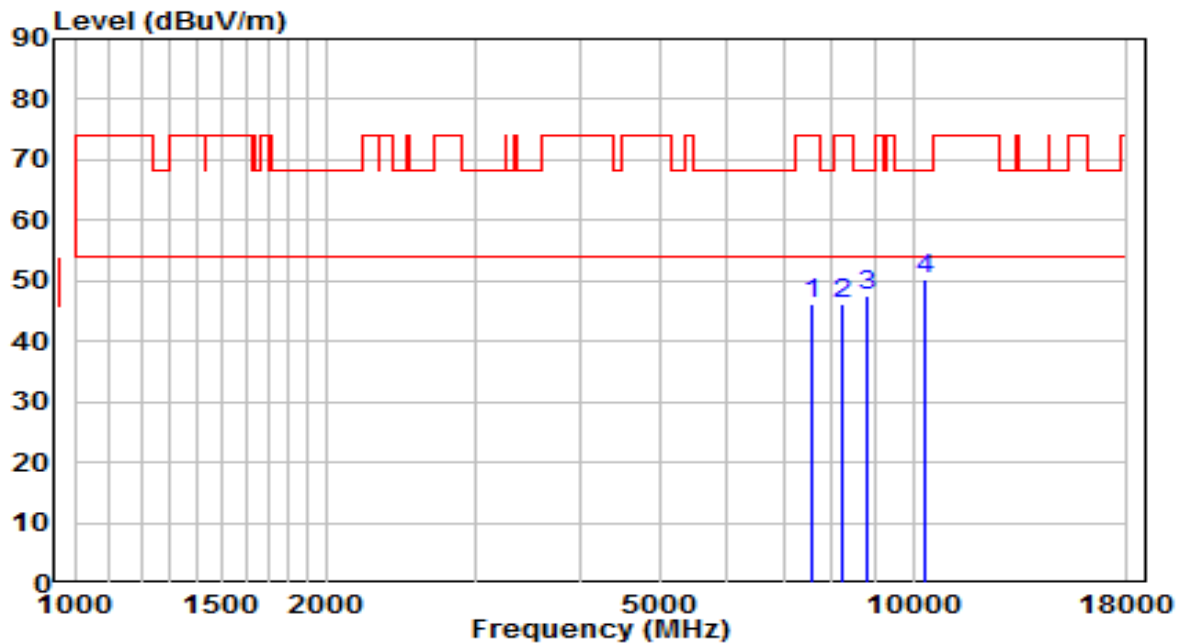


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7562.000	34.45	11.82	46.27	-27.73	74.00	Peak
2	8242.000	33.56	12.49	46.05	-27.95	74.00	Peak
3	8837.000	34.37	13.28	47.65	-20.55	68.20	Peak
4	* 10316.000	33.70	16.44	50.14	-18.06	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6000 次世代 WI-FI 路由器	Date of Test	2021-06-30
Factor	BBHA 9120D	Temp. / Humidity	24.5°C/35%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11a at Channel 5180MHz	Test Voltage	110V/60Hz

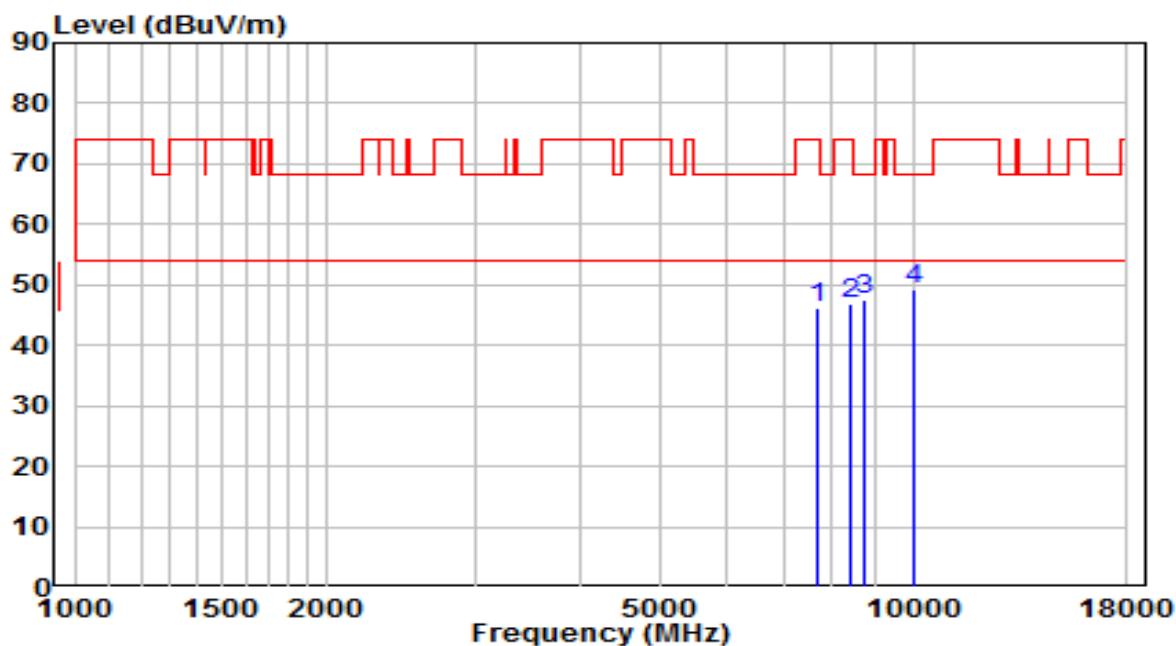


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7664.000	34.10	11.98	46.08	-27.92	74.00	Peak
2	8420.500	34.27	12.47	46.73	-27.27	74.00	Peak
3	8769.000	34.45	13.11	47.56	-20.64	68.20	Peak
4	* 10001.500	33.97	15.37	49.33	-18.87	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6000 次世代 WI-FI 路由器	Date of Test	2021-06-30
Factor	BBHA 9120D	Temp. / Humidity	24.5°C/35%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11a at Channel 5200MHz	Test Voltage	110V/60Hz

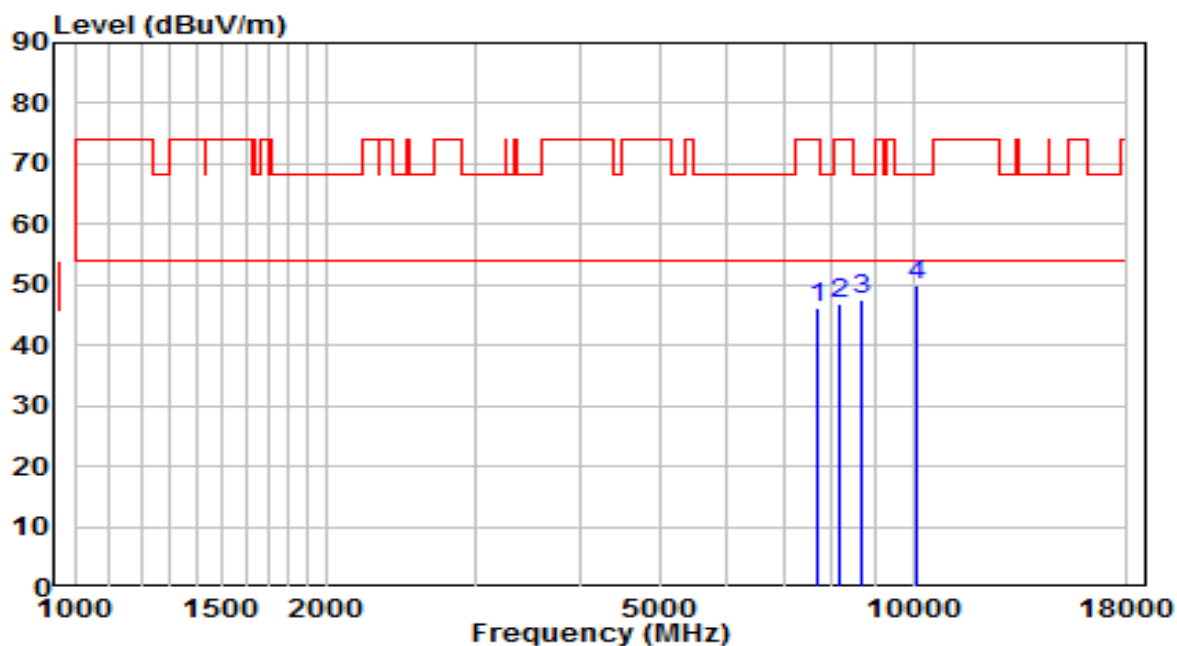


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7672.500	34.10	12.00	46.09	-27.91	74.00	Peak
2	8157.000	34.26	12.51	46.76	-27.24	74.00	Peak
3	8701.000	34.44	12.95	47.39	-20.81	68.20	Peak
4	* 10129.000	34.13	15.80	49.93	-18.27	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6000 次世代 WI-FI 路由器	Date of Test	2021-06-30
Factor	BBHA 9120D	Temp. / Humidity	24.5°C/35%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11a at Channel 5200MHz	Test Voltage	110V/60Hz

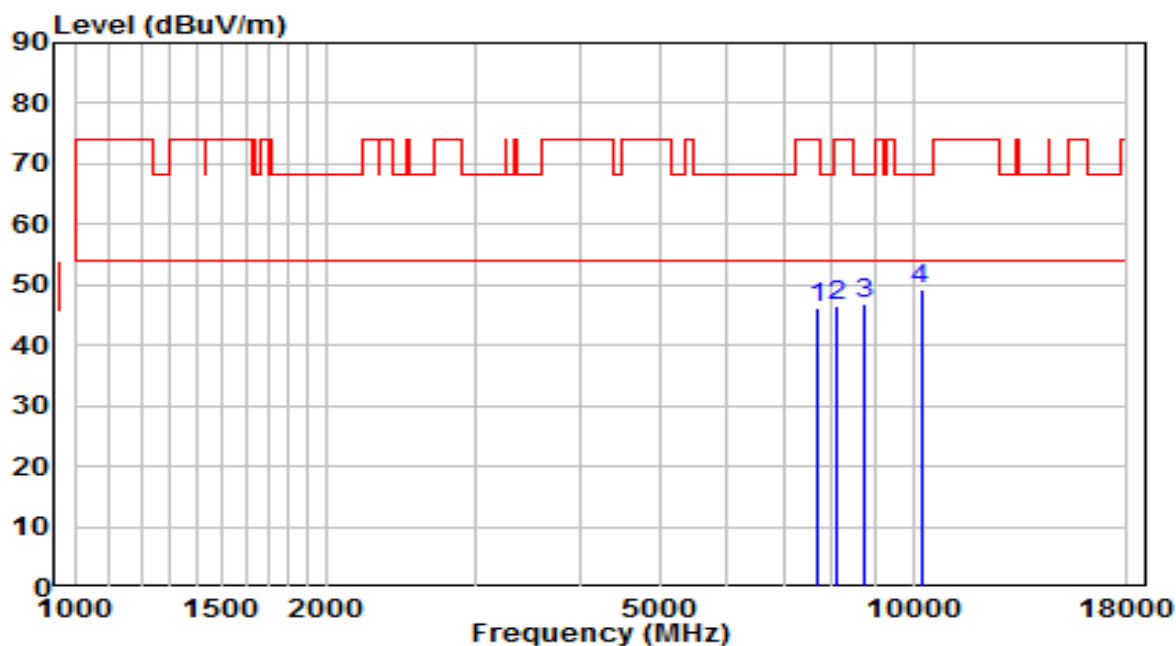


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7672.500	34.27	12.00	46.26	-27.74	74.00	Peak
2	8123.000	34.05	12.51	46.57	-27.43	74.00	Peak
3	8769.000	33.86	13.11	46.97	-21.23	68.20	Peak
4	* 10214.000	33.23	16.09	49.32	-18.88	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6000 次世代 WI-FI 路由器	Date of Test	2021-06-30
Factor	BBHA 9120D	Temp. / Humidity	24.5°C/35%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11a at Channel 5220MHz	Test Voltage	110V/60Hz

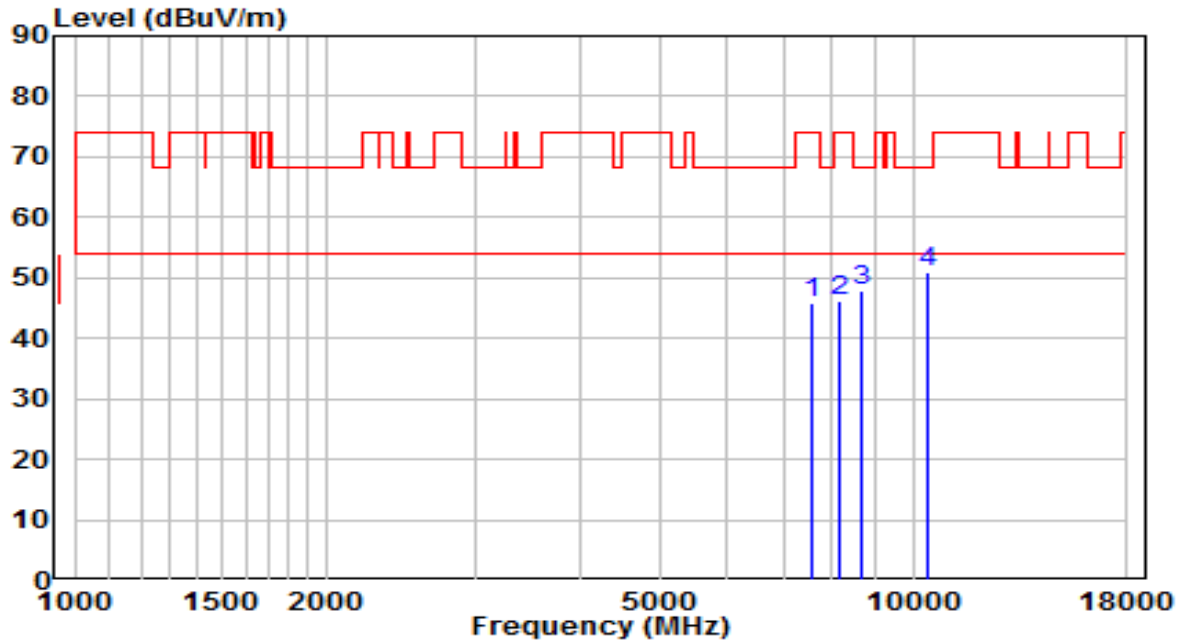


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7570.500	34.12	11.83	45.95	-28.05	74.00	Peak
2	8182.500	33.67	12.50	46.18	-27.82	74.00	Peak
3	8701.000	34.90	12.95	47.85	-20.35	68.20	Peak
4	* 10443.500	34.22	16.88	51.09	-17.11	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6000 次世代 WI-FI 路由器	Date of Test	2021-06-30
Factor	BBHA 9120D	Temp. / Humidity	24.5°C/35%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11a at Channel 5220MHz	Test Voltage	110V/60Hz

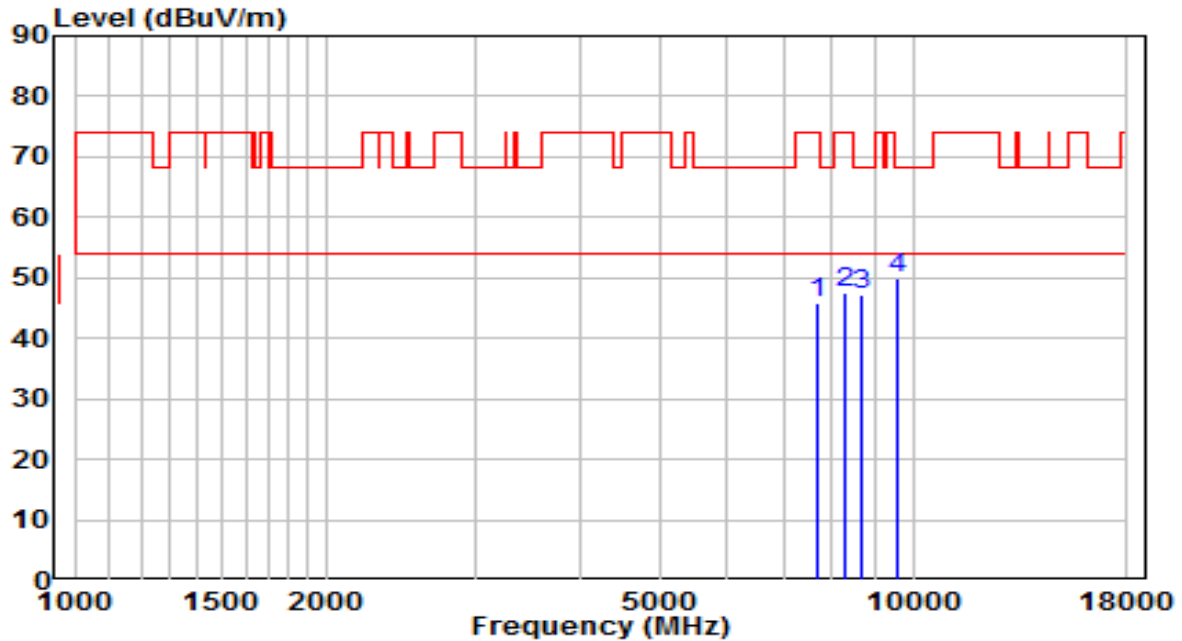


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7681.000	33.99	12.01	46.00	-28.00	74.00	Peak
2	8267.500	35.00	12.49	47.49	-26.51	74.00	Peak
3	8701.000	34.20	12.95	47.15	-21.05	68.20	Peak
4	* 9610.500	35.37	14.63	50.00	-18.20	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6000 次世代 WI-FI 路由器	Date of Test	2021-06-30
Factor	BBHA 9120D	Temp. / Humidity	24.5°C/35%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11a at Channel 5240MHz	Test Voltage	110V/60Hz

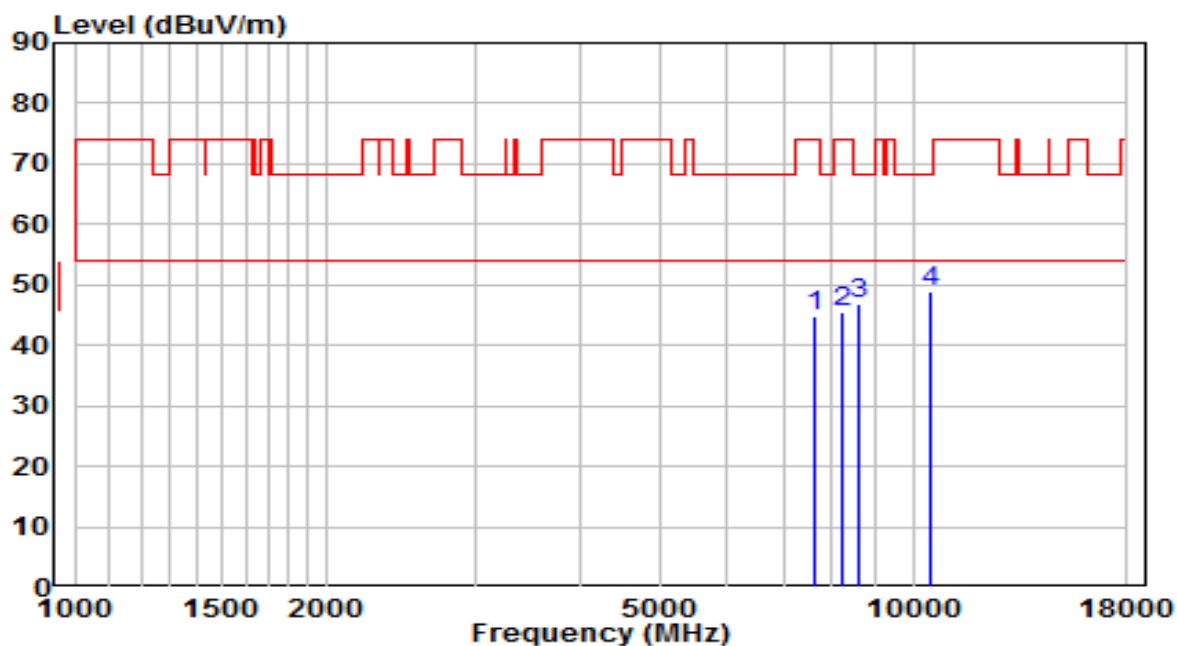


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7638.500	32.96	11.94	44.90	-29.10	74.00	Peak
2	8250.500	33.14	12.49	45.63	-28.37	74.00	Peak
3	8599.000	34.25	12.70	46.94	-21.26	68.20	Peak
4	* 10452.000	31.98	16.91	48.88	-19.32	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6000 次世代 WI-FI 路由器	Date of Test	2021-06-30
Factor	BBHA 9120D	Temp. / Humidity	24.5°C/35%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11a at Channel 5240MHz	Test Voltage	110V/60Hz

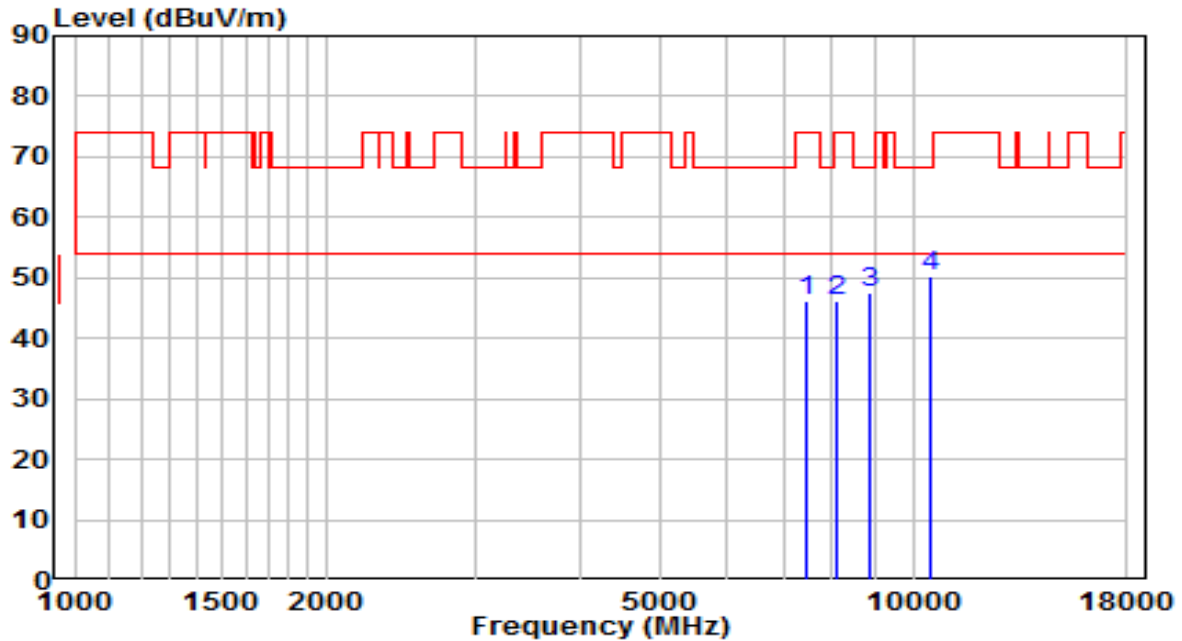


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7468.500	34.54	11.63	46.17	-27.83	74.00	Peak
2	8123.000	33.66	12.51	46.17	-27.83	74.00	Peak
3	8854.000	34.33	13.32	47.65	-20.55	68.20	Peak
4	* 10477.500	33.12	16.99	50.12	-18.08	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6000 次世代 WI-FI 路由器	Date of Test	2021-06-30
Factor	BBHA 9120D	Temp. / Humidity	24.5°C/35%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11a at Channel 5260MHz	Test Voltage	110V/60Hz

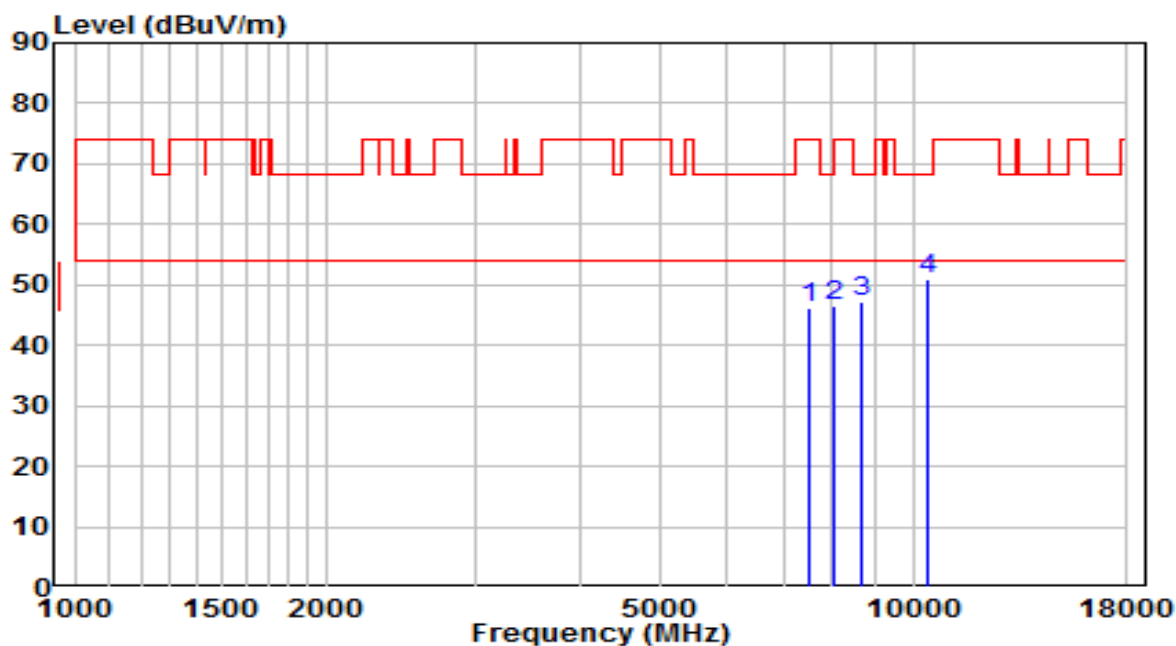


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7511.000	34.32	11.73	46.05	-27.95	74.00	Peak
2	8063.500	34.11	12.52	46.63	-27.37	74.00	Peak
3	8701.000	34.24	12.95	47.19	-21.01	68.20	Peak
4	* 10401.000	34.04	16.73	50.78	-17.42	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6000 次世代 WI-FI 路由器	Date of Test	2021-06-30
Factor	BBHA 9120D	Temp. / Humidity	24.5°C/35%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11a at Channel 5260MHz	Test Voltage	110V/60Hz

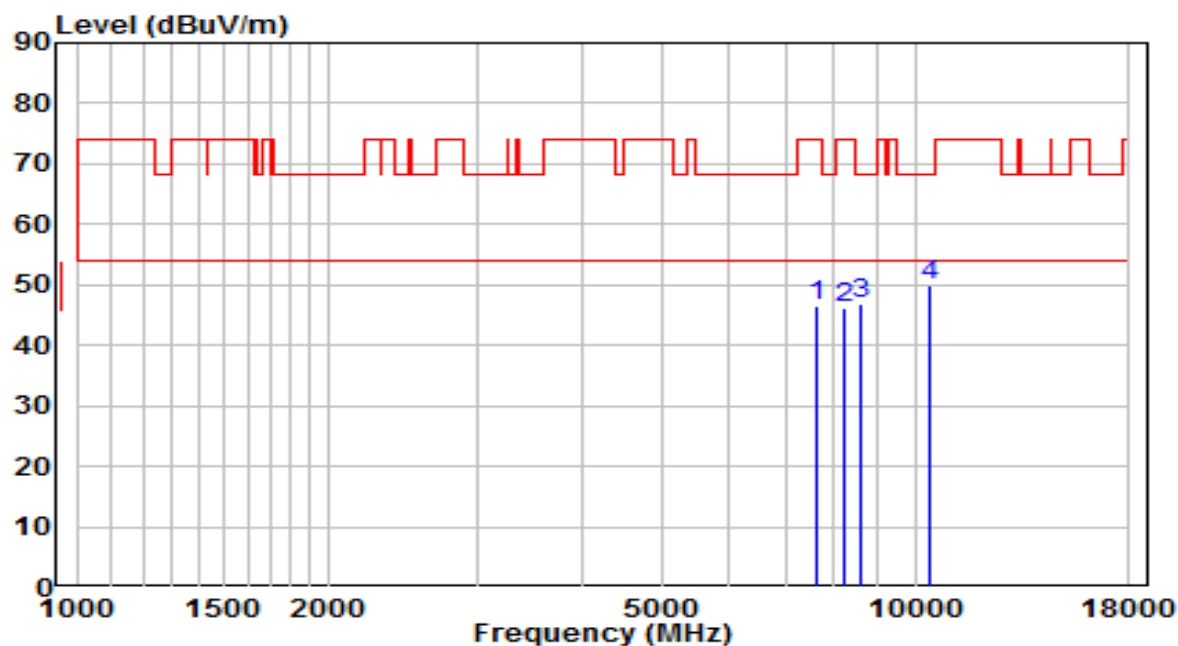


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7655.500	34.52	11.97	46.48	-27.52	74.00	Peak
2	8242.000	33.55	12.49	46.04	-27.96	74.00	Peak
3	8616.000	34.30	12.74	47.04	-21.16	68.20	Peak
4	* 10392.500	33.12	16.70	49.82	-18.38	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6000 次世代 WI-FI 路由器	Date of Test	2021-06-30
Factor	BBHA 9120D	Temp. / Humidity	24.5°C/35%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11a at Channel 5300MHz	Test Voltage	110V/60Hz

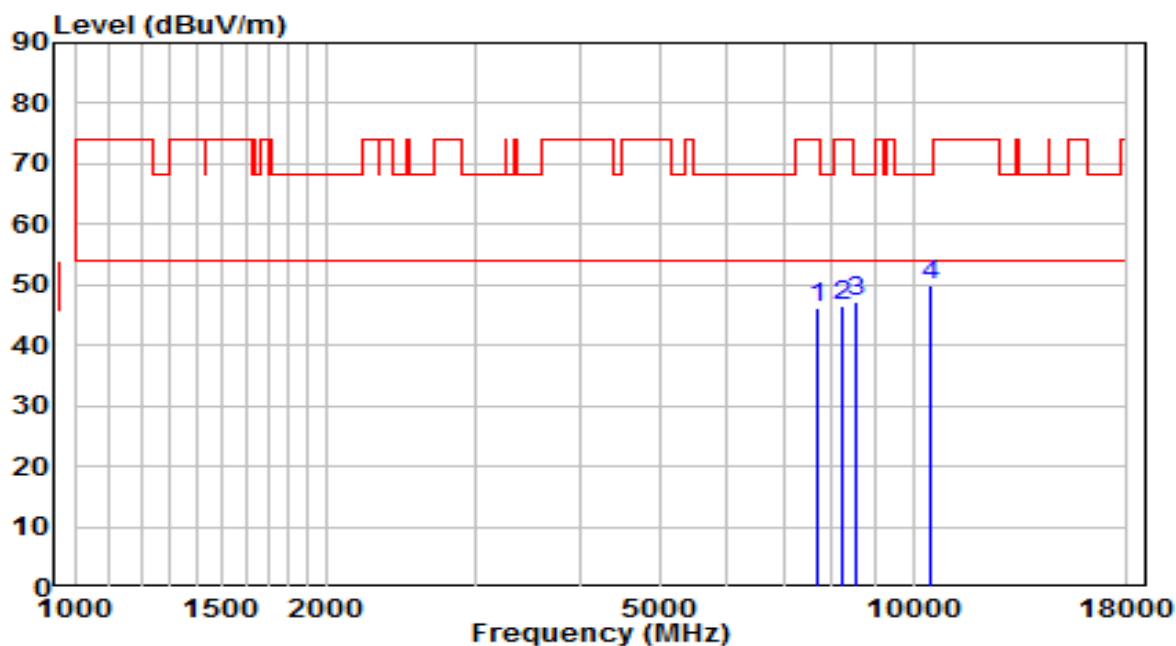


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7672.500	34.13	12.00	46.13	-27.87	74.00	Peak
2	8250.500	34.07	12.49	46.57	-27.43	74.00	Peak
3	8548.000	34.66	12.57	47.23	-20.97	68.20	Peak
4	* 10452.000	33.01	16.91	49.91	-18.29	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6000 次世代 WI-FI 路由器	Date of Test	2021-06-30
Factor	BBHA 9120D	Temp. / Humidity	24.5°C/35%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11a at Channel 5300MHz	Test Voltage	110V/60Hz

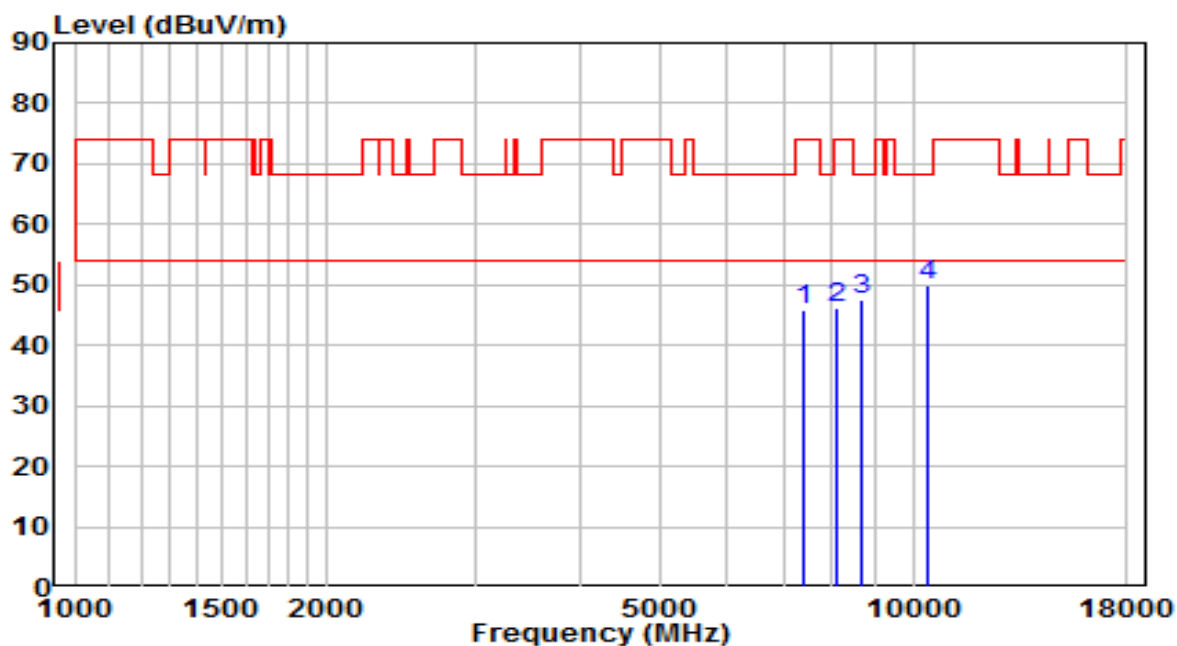


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7426.000	34.42	11.51	45.92	-28.08	74.00	Peak
2	8114.500	33.56	12.51	46.07	-27.93	74.00	Peak
3	8675.500	34.51	12.88	47.40	-20.80	68.20	Peak
4	* 10392.500	33.38	16.70	50.08	-18.12	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6000 次世代 WI-FI 路由器	Date of Test	2021-06-30
Factor	BBHA 9120D	Temp. / Humidity	24.5°C/35%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11a at Channel 5320MHz	Test Voltage	110V/60Hz

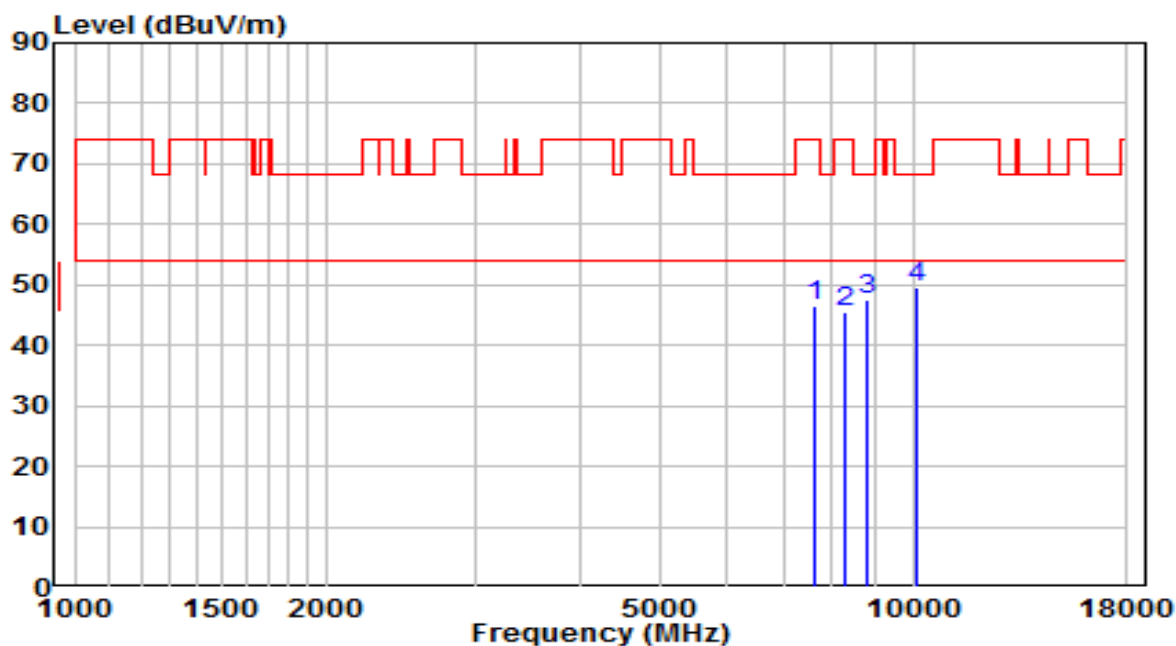


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7638.500	34.55	11.94	46.49	-27.51	74.00	Peak
2	8310.000	33.14	12.48	45.62	-28.38	74.00	Peak
3	8837.000	34.43	13.28	47.71	-20.49	68.20	Peak
4	* 10095.000	33.87	15.68	49.56	-18.64	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6000 次世代 WI-FI 路由器	Date of Test	2021-06-30
Factor	BBHA 9120D	Temp. / Humidity	24.5°C/35%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11a at Channel 5320MHz	Test Voltage	110V/60Hz

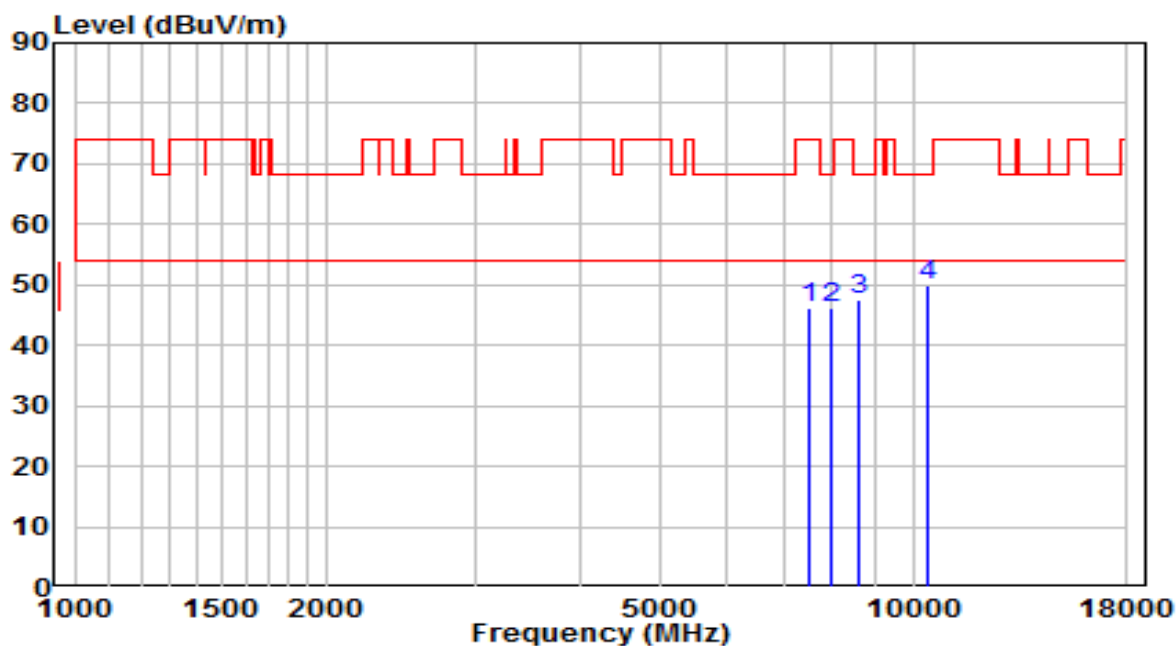


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7528.000	34.37	11.76	46.13	-27.87	74.00	Peak
2	8004.000	33.79	12.53	46.32	-21.88	68.20	Peak
3	8633.000	34.61	12.78	47.39	-20.81	68.20	Peak
4	* 10375.500	33.14	16.64	49.79	-18.41	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6000 次世代 WI-FI 路由器	Date of Test	2021-06-30
Factor	BBHA 9120D	Temp. / Humidity	24.5°C/35%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11a at Channel 5500MHz	Test Voltage	110V/60Hz

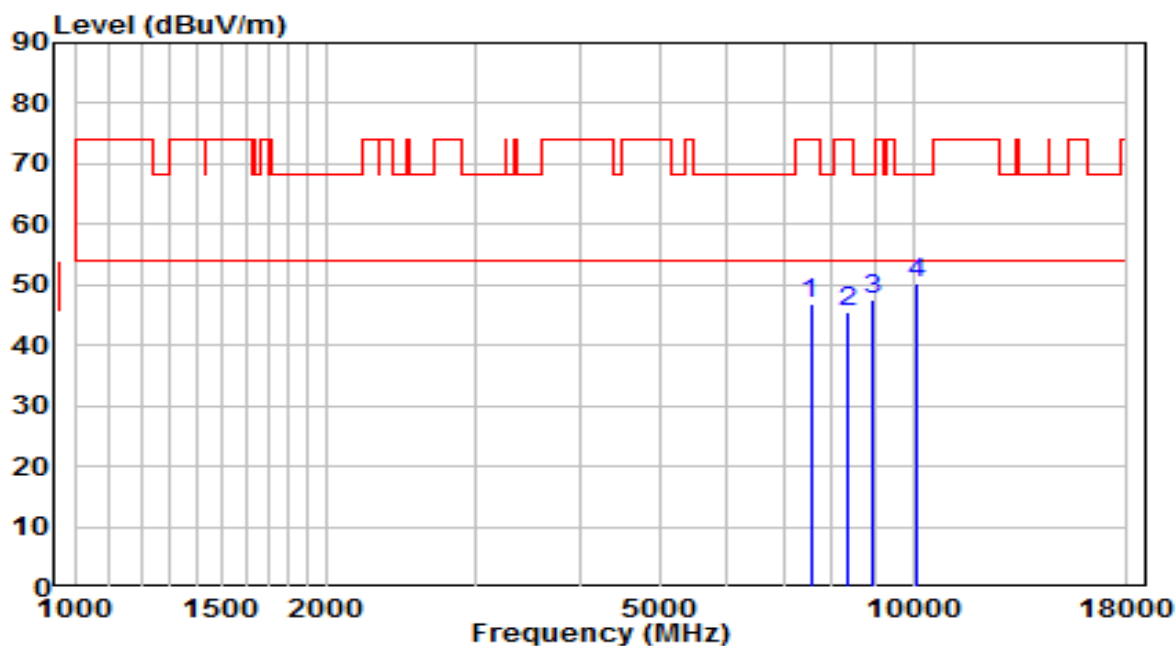


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7545.000	35.08	11.79	46.86	-27.14	74.00	Peak
2	8335.500	33.15	12.48	45.63	-28.37	74.00	Peak
3	8922.000	33.96	13.49	47.45	-20.75	68.20	Peak
4	* 10078.000	34.48	15.63	50.11	-18.09	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6000 次世代 WI-FI 路由器	Date of Test	2021-06-30
Factor	BBHA 9120D	Temp. / Humidity	24.5°C/35%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11a at Channel 5500MHz	Test Voltage	110V/60Hz

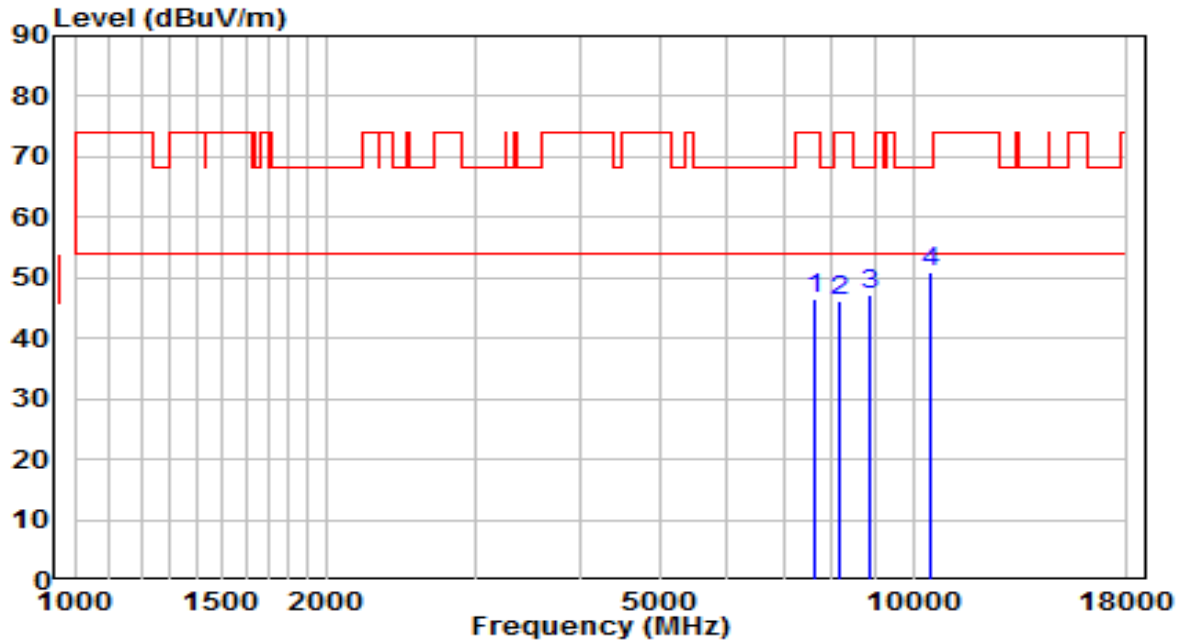


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7655.500	34.60	11.97	46.57	-27.43	74.00	Peak
2	8174.000	33.60	12.50	46.10	-27.90	74.00	Peak
3	8854.000	33.78	13.32	47.10	-21.10	68.20	Peak
4	* 10503.000	33.97	17.07	51.05	-17.15	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6000 次世代 WI-FI 路由器	Date of Test	2021-06-30
Factor	BBHA 9120D	Temp. / Humidity	24.5°C/35%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11a at Channel 5600MHz	Test Voltage	110V/60Hz

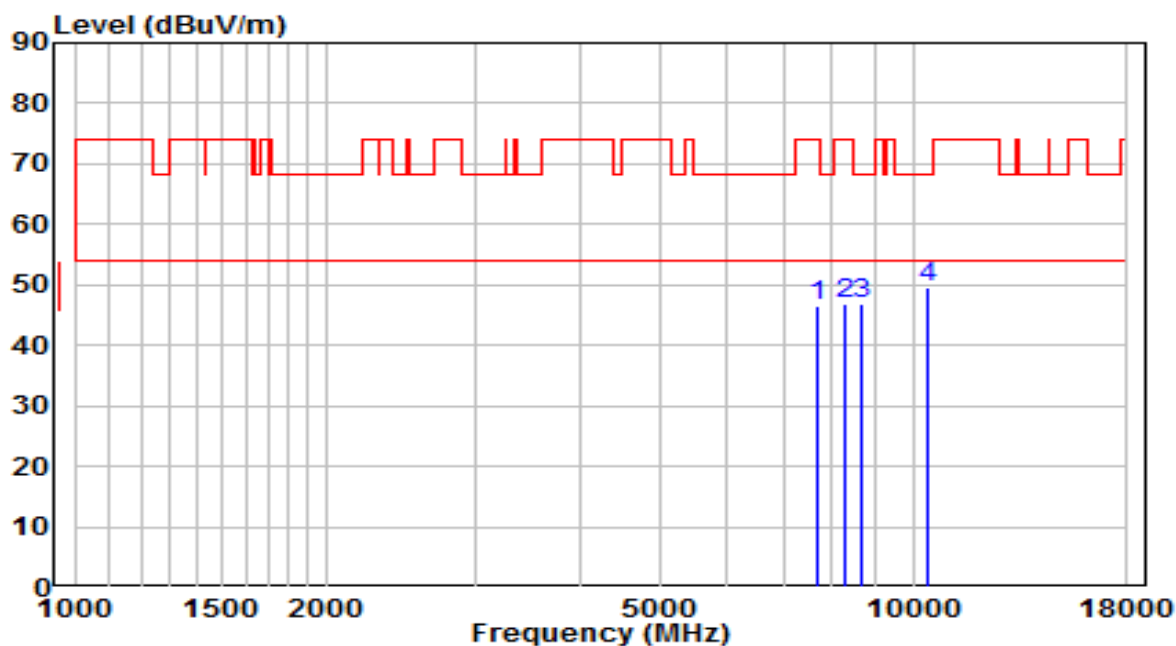


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7698.000	34.33	12.04	46.37	-27.63	74.00	Peak
2	8267.500	34.49	12.49	46.98	-27.02	74.00	Peak
3	8667.000	34.15	12.86	47.02	-21.18	68.20	Peak
4	* 10443.500	32.85	16.88	49.73	-18.47	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6000 次世代 WI-FI 路由器	Date of Test	2021-06-30
Factor	BBHA 9120D	Temp. / Humidity	24.5°C/35%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11a at Channel 5600MHz	Test Voltage	110V/60Hz

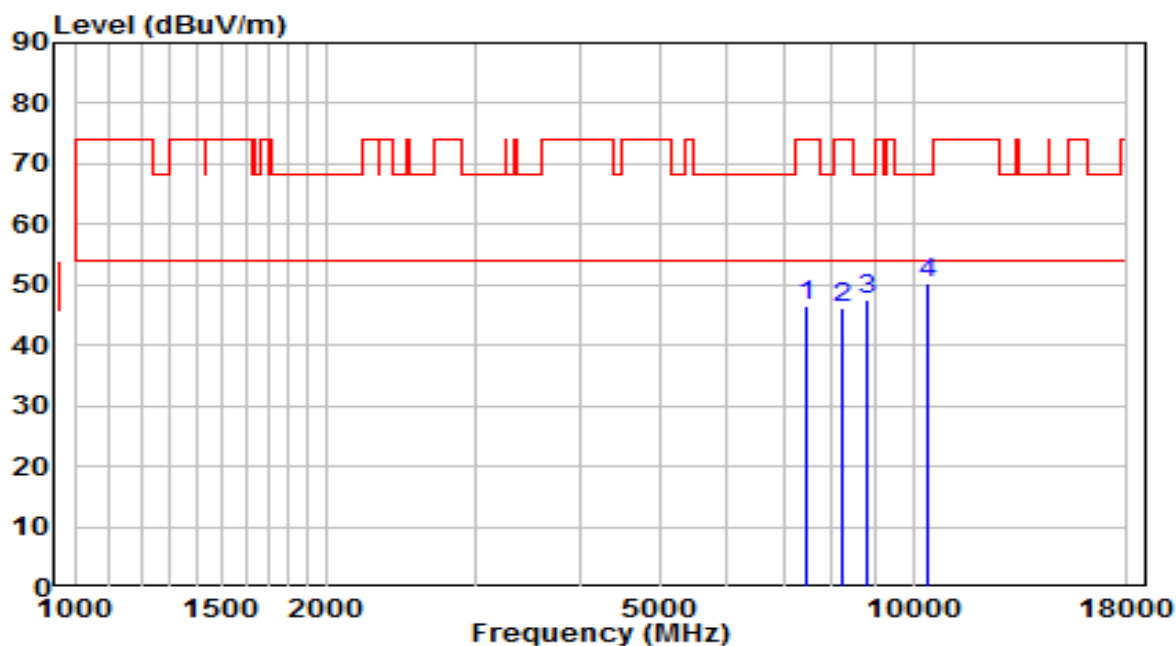


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7485.500	34.86	11.67	46.54	-27.46	74.00	Peak
2	8233.500	33.84	12.49	46.33	-27.67	74.00	Peak
3	8794.500	34.32	13.18	47.50	-20.70	68.20	Peak
4	* 10409.500	33.54	16.76	50.30	-17.90	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6000 次世代 WI-FI 路由器	Date of Test	2021-06-30
Factor	BBHA 9120D	Temp. / Humidity	24.5°C/35%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11a at Channel 5700MHz	Test Voltage	110V/60Hz

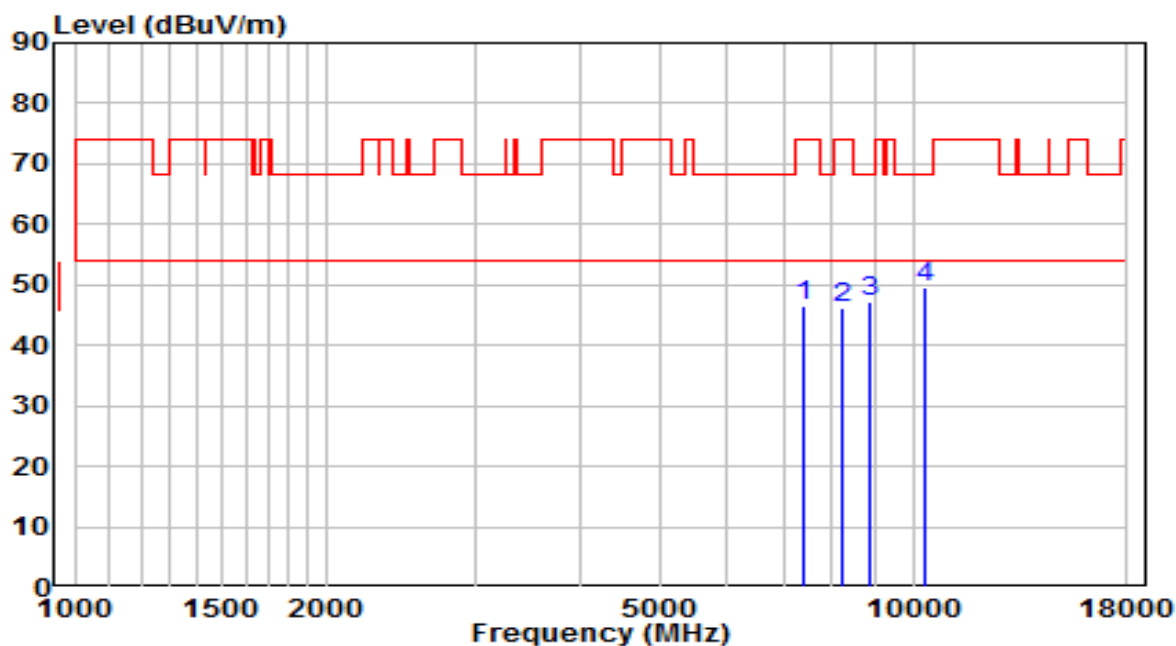


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7417.500	34.99	11.48	46.47	-27.53	74.00	Peak
2	8250.500	33.80	12.49	46.29	-27.71	74.00	Peak
3	8905.000	33.61	13.45	47.06	-21.14	68.20	Peak
4	* 10358.500	33.15	16.59	49.73	-18.47	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6000 次世代 WI-FI 路由器	Date of Test	2021-06-30
Factor	BBHA 9120D	Temp. / Humidity	24.5°C/35%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11a at Channel 5720MHz	Test Voltage	110V/60Hz

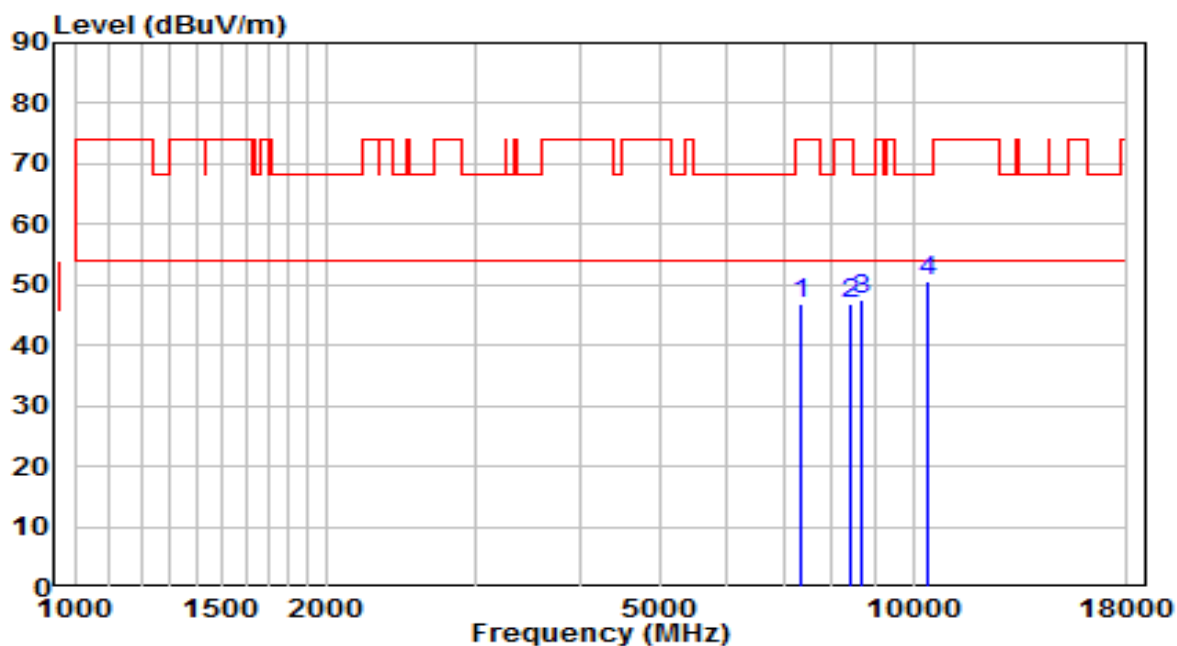


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7332.500	35.71	11.24	46.95	-27.05	74.00	Peak
2	8412.000	34.34	12.47	46.81	-27.19	74.00	Peak
3	8701.000	34.60	12.95	47.54	-20.66	68.20	Peak
4	* 10384.000	33.78	16.67	50.45	-17.75	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6000 次世代 WI-FI 路由器	Date of Test	2021-06-30
Factor	BBHA 9120D	Temp. / Humidity	24.5°C/35%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11a at Channel 5720MHz	Test Voltage	110V/60Hz

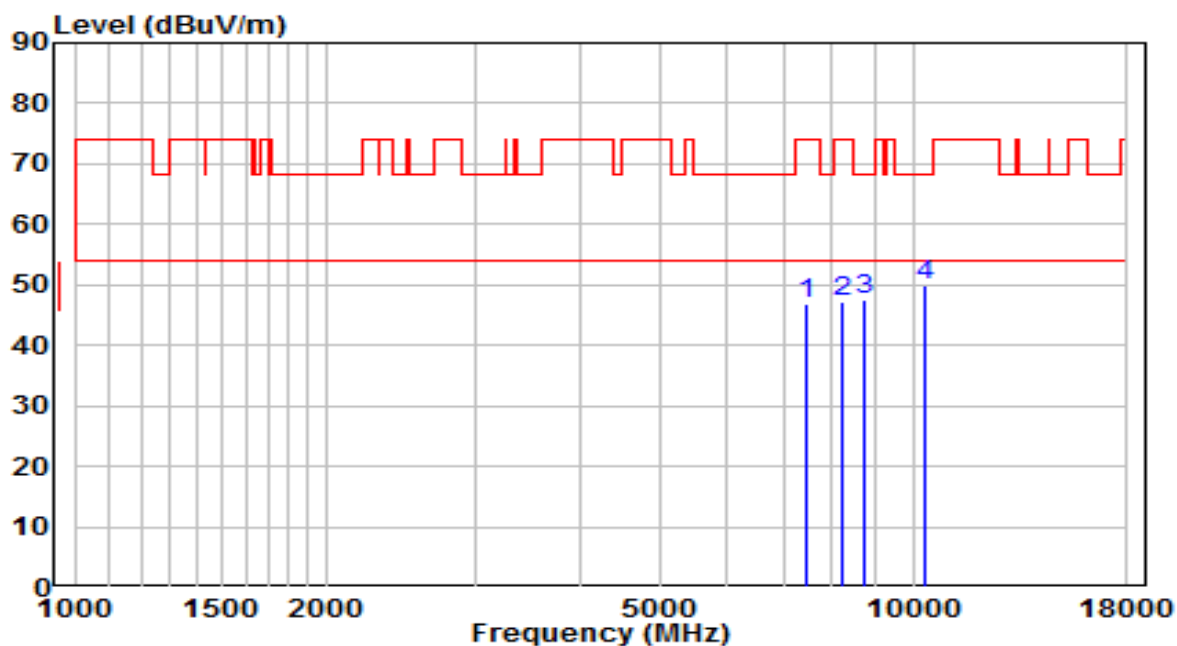


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7477.000	35.19	11.65	46.84	-27.16	74.00	Peak
2	8225.000	34.82	12.50	47.31	-26.69	74.00	Peak
3	8769.000	34.32	13.11	47.43	-20.77	68.20	Peak
4	* 10333.000	33.51	16.50	50.00	-18.20	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6000 次世代 WI-FI 路由器	Date of Test	2021-06-30
Factor	BBHA 9120D	Temp. / Humidity	24.5°C/35%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11a at Channel 5745MHz	Test Voltage	110V/60Hz

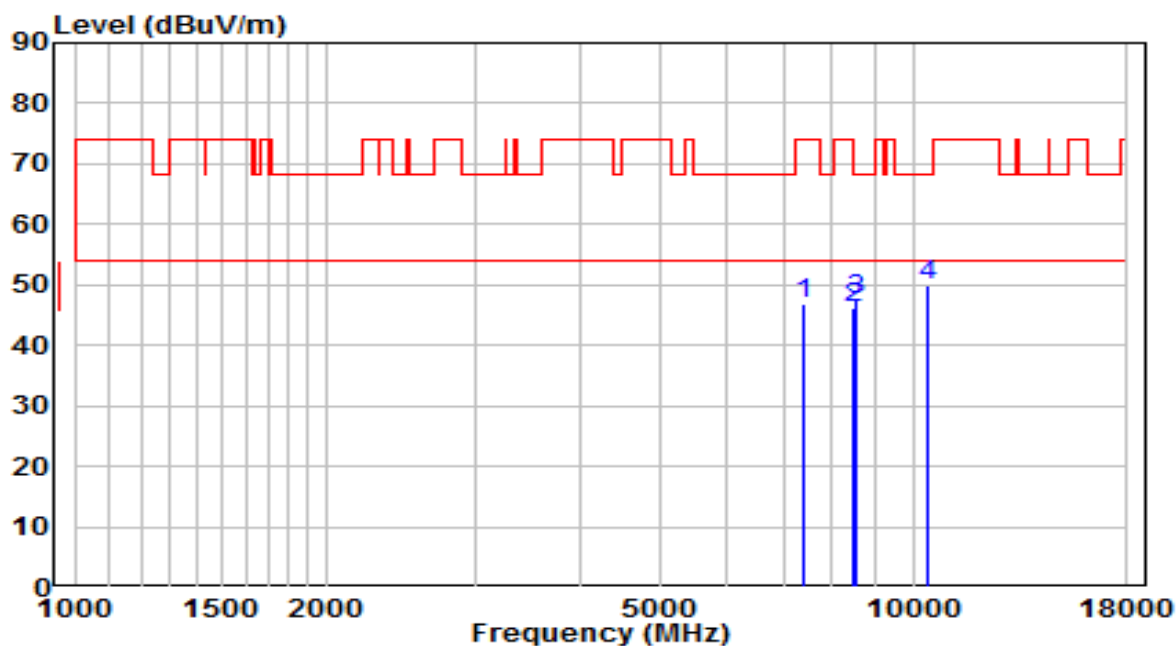


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7400.500	35.52	11.43	46.96	-27.04	74.00	Peak
2	8471.500	33.61	12.46	46.07	-27.93	74.00	Peak
3	8548.000	35.08	12.57	47.66	-20.54	68.20	Peak
4	* 10375.500	33.17	16.64	49.82	-18.38	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6000 次世代 WI-FI 路由器	Date of Test	2021-06-30
Factor	BBHA 9120D	Temp. / Humidity	24.5°C/35%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11a at Channel 5745MHz	Test Voltage	110V/60Hz

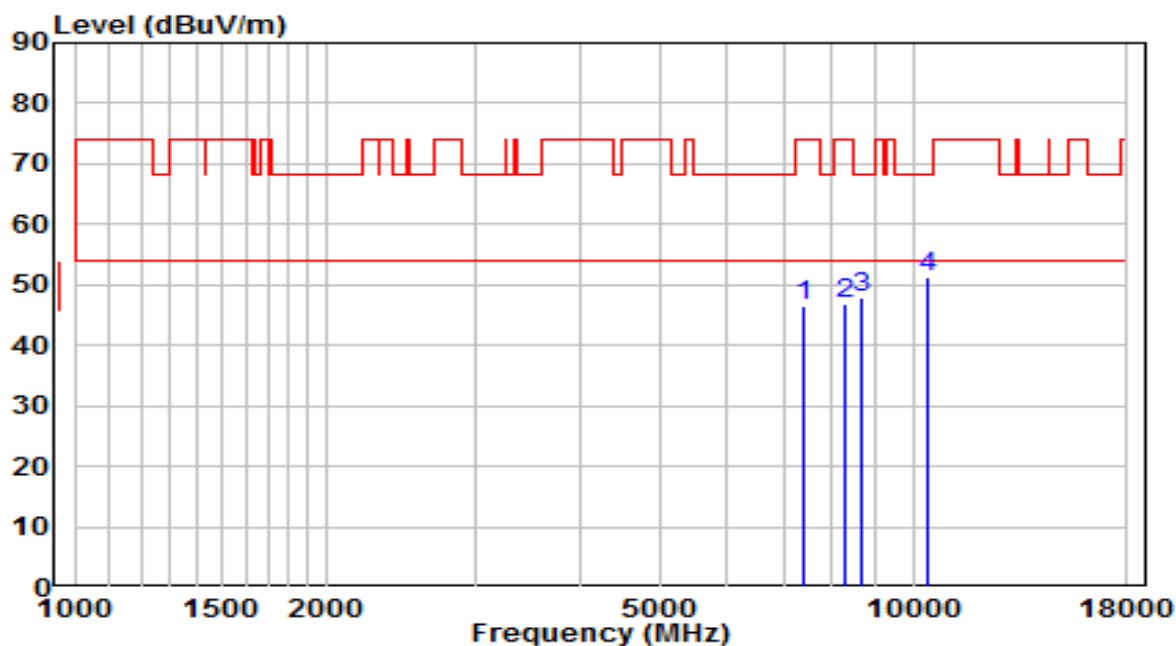


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7426.000	34.96	11.51	46.47	-27.53	74.00	Peak
2	8318.500	34.22	12.48	46.70	-27.30	74.00	Peak
3	8675.500	34.84	12.88	47.72	-20.48	68.20	Peak
4	* 10409.500	34.65	16.76	51.41	-16.79	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6000 次世代 WI-FI 路由器	Date of Test	2021-06-30
Factor	BBHA 9120D	Temp. / Humidity	24.5°C/35%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11a at Channel 5785MHz	Test Voltage	110V/60Hz

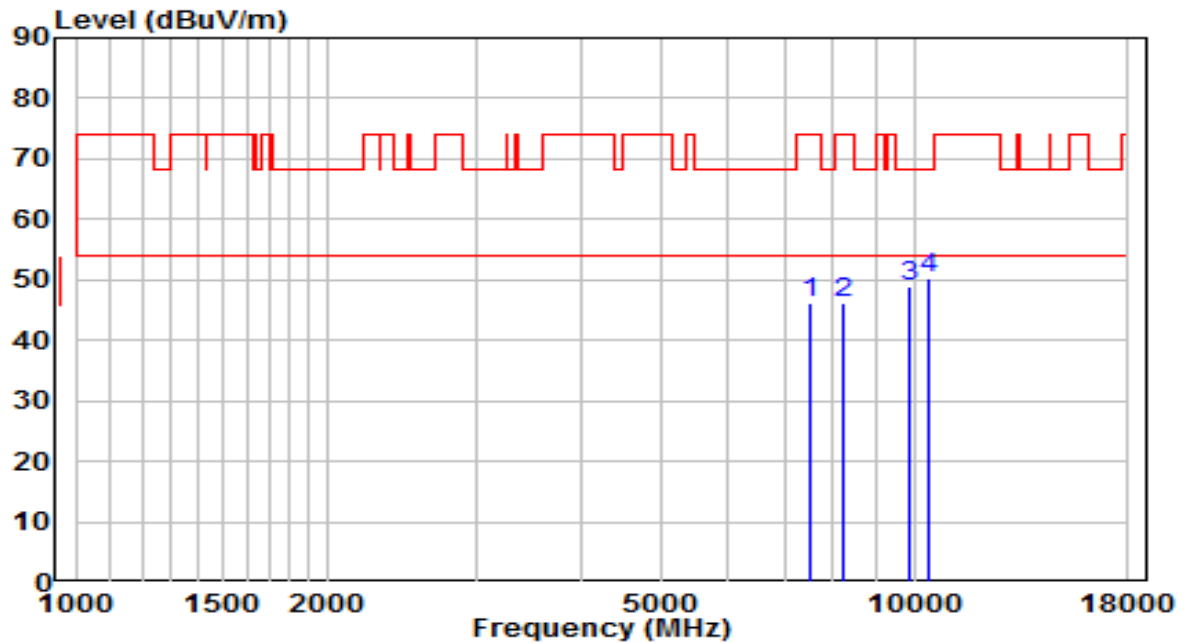


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	7536.500	34.18	12.07	46.25	-27.75	74.00	Peak
2	8259.000	33.86	12.17	46.03	-27.97	74.00	Peak
3	9882.500	33.40	15.52	48.92	-19.28	68.20	Peak
4	* 10426.500	33.42	16.70	50.12	-18.08	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6000 次世代 WI-FI 路由器	Date of Test	2021-06-30
Factor	BBHA 9120D	Temp. / Humidity	24.5°C/35%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11a at Channel 5785MHz	Test Voltage	110V/60Hz

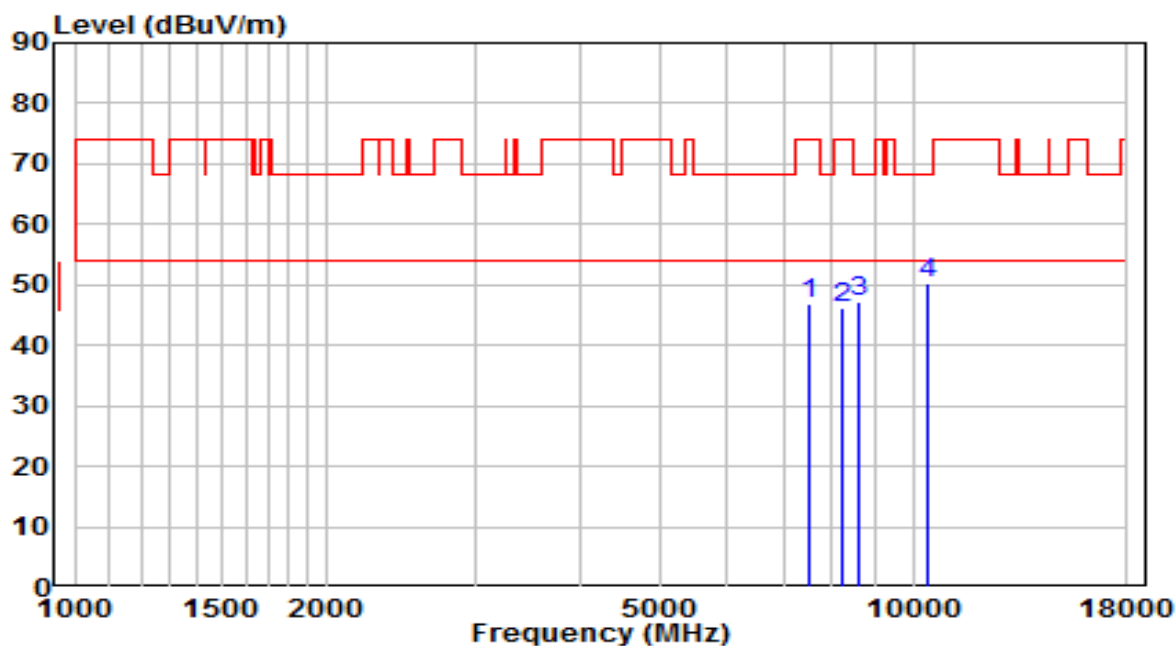


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7494.000	35.03	11.70	46.73	-27.27	74.00	Peak
2	8216.500	33.75	12.50	46.24	-27.76	74.00	Peak
3	8616.000	34.51	12.74	47.25	-20.95	68.20	Peak
4	* 10443.500	33.28	16.88	50.16	-18.04	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6000 次世代 WI-FI 路由器	Date of Test	2021-06-30
Factor	BBHA 9120D	Temp. / Humidity	24.5°C/35%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11a at Channel 5825MHz	Test Voltage	110V/60Hz

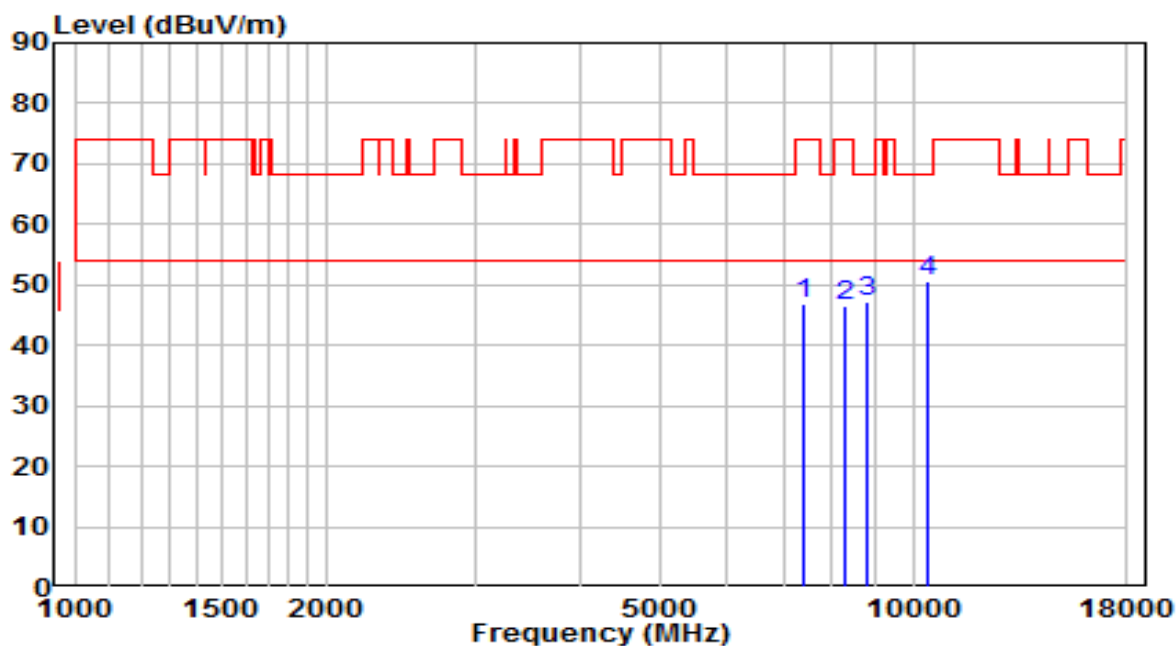


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7409.000	35.29	11.46	46.75	-27.25	74.00	Peak
2	8293.000	34.19	12.49	46.68	-27.32	74.00	Peak
3	8794.500	34.13	13.18	47.31	-20.89	68.20	Peak
4	* 10384.000	33.87	16.67	50.54	-17.66	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6000 次世代 WI-FI 路由器	Date of Test	2021-06-30
Factor	BBHA 9120D	Temp. / Humidity	24.5°C/35%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11a at Channel 5825MHz	Test Voltage	110V/60Hz

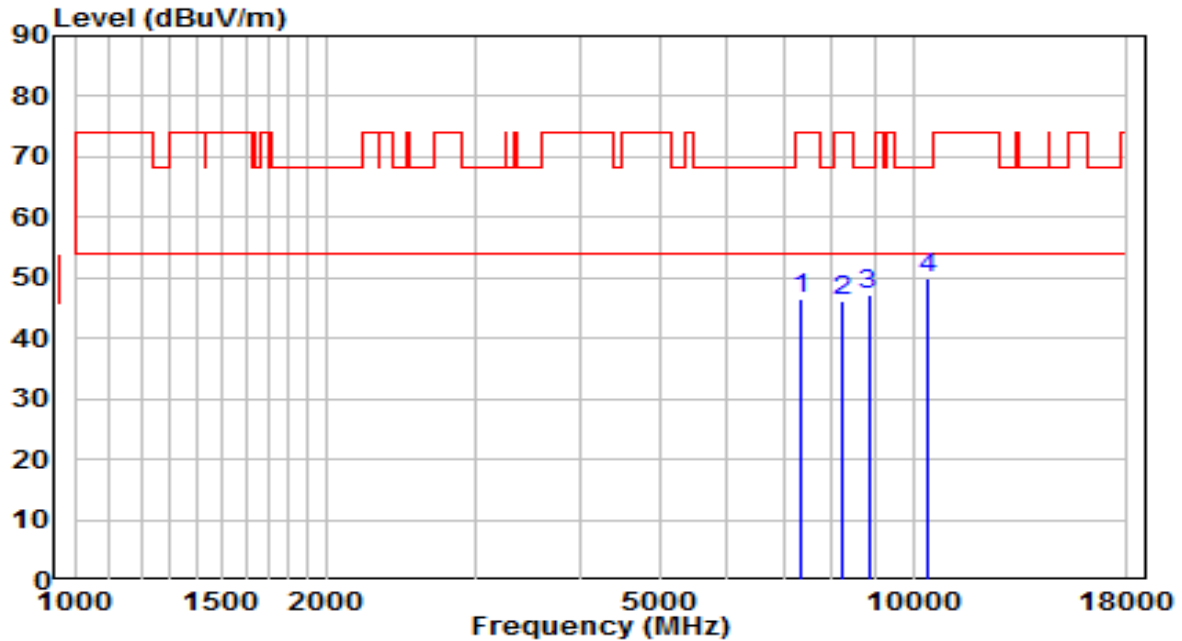


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7332.500	35.39	11.24	46.63	-27.37	74.00	Peak
2	8216.500	33.81	12.50	46.31	-27.69	74.00	Peak
3	8845.500	33.93	13.30	47.23	-20.97	68.20	Peak
4	* 10443.500	33.20	16.88	50.07	-18.13	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6000 次世代 WI-FI 路由器	Date of Test	2021-06-30
Factor	BBHA 9120D	Temp. / Humidity	24.5°C/35%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT20 at Channel 5180MHz	Test Voltage	110V/60Hz

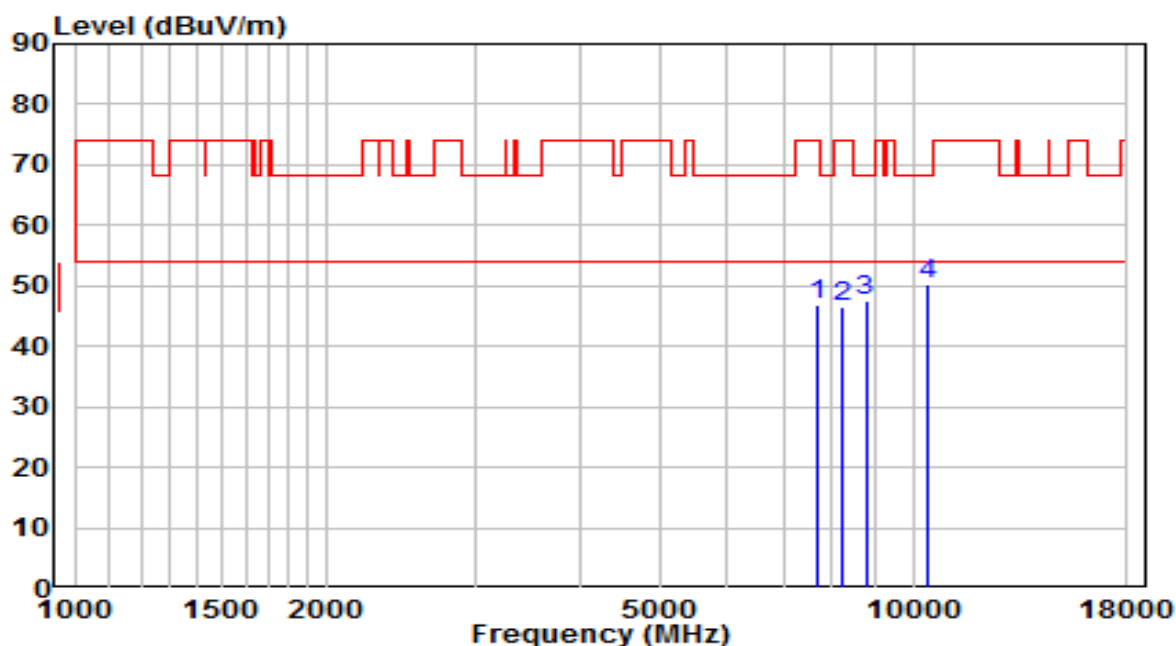


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7689.500	34.86	12.02	46.88	-27.12	74.00	Peak
2	8259.000	34.19	12.49	46.68	-27.32	74.00	Peak
3	8777.500	34.50	13.13	47.63	-20.57	68.20	Peak
4	* 10392.500	33.42	16.70	50.13	-18.07	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6000 次世代 WI-FI 路由器	Date of Test	2021-06-30
Factor	BBHA 9120D	Temp. / Humidity	24.5°C/35%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT20 at Channel 5180MHz	Test Voltage	110V/60Hz

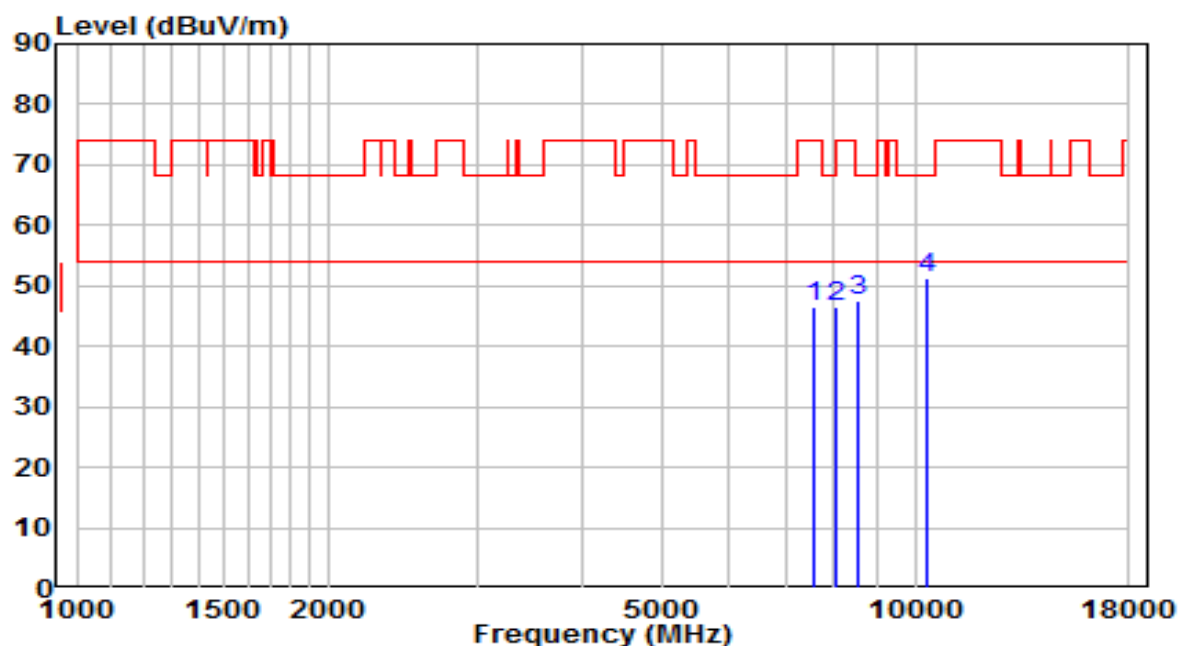

No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7570.500	34.65	11.83	46.48	-27.52	74.00	Peak
2	8046.500	33.94	12.52	46.46	-27.54	74.00	Peak
3	8565.000	34.99	12.61	47.61	-20.59	68.20	Peak
4	* 10367.000	34.71	16.62	51.33	-16.87	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.